

ESL6018A2 PIN-Schottky Diode Limiter

6.0 to 18.0 GHz Broadband



Technical Characteristics

Product Features

- Power Handling: 1 watt CW, 100W peak power
(1 usec Pulse Width, 0.1% Duty Cycle Derated to 20% @ +125 °C)
- Internal DC return
- Fast recovery time - 200µS typ.
- Limiting threshold above +4dBm typ. & below typ. output leakage
- Low insertion loss

Maximum Ratings

Storage Temperature:	-65 to +125°
Operating Temperature:	-55 to +90°
Input power:	1 watt CW, 100 watts peak

Product Export Classification


ECCN: EAR 99 (unless otherwise specified)
HTS: 85543.70.8000

Specifications @ +25°C & -10 dBm input power.

Electrical Specifications

Parameters	Freq. (GHz)	Min.	Typical	Max.	Units
Insertion Loss	2.0 to 18.0		2.5		dB
VSWR	6.0 to 18.0		2.2:1		-
Leakage Power (CW)	6.0 to 18.0			15.0	dBm CW
				19.0	dBm Peak
Operating Temperature		-55		90	°C

Outline drawing

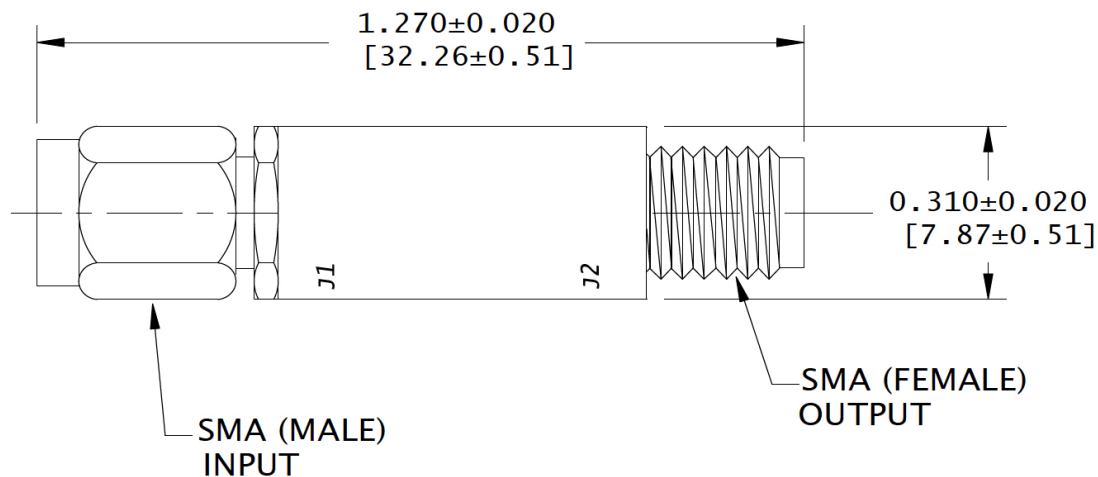

Notes:

1. Limiter has an internal DC block.
2. Typical values are measured at +25°C and are not guaranteed.