


DATA SHEET
High Efficiency Heterojunction Power FET

- **NON-HERMETIC LOW COST CERAMIC 70mil PACKAGE**
- **+21.5dBm TYPICAL OUTPUT POWER**
- **8.0dB TYPICAL POWER GAIN AT 18GHz**
- **TYPICAL 0.85dB NOISE FIGURE AND 11.0dB ASSOCIATED GAIN AT 12GHz**
- **0.3 X 250 MICRON RECESSED “MUSHROOM” GATE**
- **Si₃N₄ PASSIVATION**
- **ADVANCED EPITAXIAL HETEROJUNCTION PROFILE PROVIDES EXTRA HIGH POWER EFFICIENCY, AND HIGH RELIABILITY**

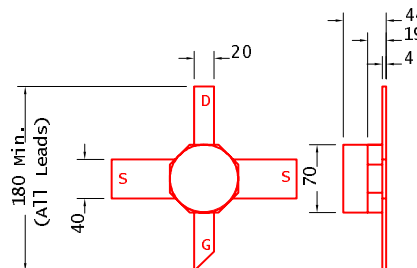

All Dimensions In mils.

ELECTRICAL CHARACTERISTICS (T_a = 25 °C)

SYMBOLS	PARAMETERS/TEST CONDITIONS	MIN	TYP	MAX	UNIT
P_{1dB}	Output Power at 1dB Compression V _{ds} =6V, I _{ds} =50% I _{dss} f=12GHz f=18GHz	19.5	21.5 21.5		dBm
G_{1dB}	Gain at 1dB Compression V _{ds} =6V, I _{ds} =50% I _{dss} f=12GHz f=18GHz	9.5	11.0 8.0		dB
PAE	Power Added Efficiency at 1dB Compression V _{ds} =6V, I _{ds} =50% I _{dss} f=12GHz		47		%
NF	Noise Figure V _{ds} =2V, I _{ds} =15mA f=12GHz		0.85		dB
G_a	Associated Gain V _{ds} =2V, I _{ds} =15mA f=12GHz		11.0		dB
I_{dss}	Saturated Drain Current V _{ds} =3V, V _{gs} =0V	40	75	105	mA
G_m	Transconductance V _{ds} =3V, V _{gs} =0V	50	80		mS
V_p	Pinch-off Voltage V _{ds} =3V, I _{ds} =1.0mA		-1.0	-2.5	V
BV_{gd}	Drain Breakdown Voltage I _{gd} =1.0mA	-9	-15		V
BV_{gs}	Source Breakdown Voltage I _{gs} =1.0mA	-6	-14		V
R_{th}	Thermal Resistance		370*		°C/W

* Overall R_{th} depends on case mounting.

MAXIMUM RATINGS AT 25°C

SYMBOLS	PARAMETERS	ABSOLUTE ¹	CONTINUOUS ²
V_{ds}	Drain-Source Voltage	10V	6V
V_{gs}	Gate-Source Voltage	-6V	-3V
I_{ds}	Drain Current	I _{dss}	50mA
I_{gsf}	Forward Gate Current	12mA	2mA
P_{in}	Input Power	18dBm	@ 3dB Compression
T_{ch}	Channel Temperature	175°C	150 °C
T_{stg}	Storage Temperature	-65/175°C	-65/150 °C
P_t	Total Power Dissipation	370mW	310mW

Note: 1 Exceeding any of the above ratings may result in permanent damage.

2. Exceeding any of the above ratings may reduce MTTF below design goals.

Excelics Semiconductor, Inc., 2908 Scott Blvd., Santa Clara, CA 95054

Phone: (408) 970-8664 Fax: (408) 970-8998 Web Site: www.excelics.com

EPA025A-70

DATA SHEET

High Efficiency Heterojunction Power FET

S-PARAMETERS

6V, 1/2 Idss

FREQ	--- S11 ---		--- S21 ---		--- S12 ---		--- S22 ---	
(GHz)	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
1.0	0.963	-26.2	6.488	155.5	0.015	75.3	0.795	-12.4
2.0	0.886	-51.2	5.91	132.5	0.026	60.1	0.76	-25.4
3.0	0.799	-73.4	5.223	112.3	0.033	49.6	0.729	-37
4.0	0.716	-94.3	4.709	94.4	0.038	44.2	0.707	-45.9
5.0	0.638	-113.8	4.296	77.9	0.042	39.6	0.68	-54.4
6.0	0.579	-129.1	3.913	62.7	0.045	37.7	0.651	-65.5
7.0	0.517	-145.7	3.559	47.9	0.047	34.2	0.637	-76
8.0	0.462	-161.5	3.288	34.4	0.048	33.9	0.619	-84.4
9.0	0.424	172.2	3.097	19.9	0.055	34.3	0.627	-90.9
10.0	0.409	148.3	2.9	4.8	0.064	31	0.623	-102.3
11.0	0.381	134.7	2.794	-9.1	0.074	25.6	0.62	-118
12.0	0.366	115.9	2.692	-23.3	0.086	19.6	0.629	-132.5
13.0	0.429	92.8	2.521	-38.3	0.098	10.5	0.618	-144.4
14.0	0.483	73.8	2.324	-53.1	0.106	0.1	0.612	-157.7
15.0	0.488	56.6	2.209	-69.6	0.115	-12	0.633	-178.6
16.0	0.506	38.2	2.089	-86.7	0.123	-25.8	0.642	160.4
17.0	0.52	26.1	1.874	-99.9	0.124	-33.2	0.607	149.2
18.0	0.559	17.4	1.823	-112.1	0.142	-46.2	0.673	136.7
19.0	0.579	-2.4	1.637	-128.6	0.132	-60.9	0.687	115.8
20.0	0.625	-15.5	1.561	-144.3	0.135	-73.4	0.744	98.8
21.0	0.622	-23.3	1.49	-159.8	0.141	-86.7	0.733	86.7
22.0	0.583	-35.7	1.399	-173.6	0.144	-99.4	0.738	76.6
23.0	0.605	-55.5	1.27	170.1	0.141	-115.7	0.727	58.1
24.0	0.639	-69.2	1.179	152.8	0.144	-132.1	0.73	38.8
25.0	0.571	-84.8	1.157	135.4	0.156	-149.3	0.736	25.1
26.0	0.554	-106.7	1.153	118.9	0.174	-164.6	0.733	13.3

S-PARAMETERS

2V, 15mA

FREQ	--- S11 ---		--- S21 ---		--- S12 ---		--- S22 ---	
(GHz)	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
1.0	1.014	-22.6	8.052	156.7	0.030	72.3	0.546	-27.0
2.0	0.927	-42.6	5.927	138.8	0.043	62.6	0.591	-31.6
3.0	0.861	-62.4	5.434	120.8	0.058	49.9	0.564	-45.7
4.0	0.801	-79.1	4.978	104.7	0.069	41.5	0.524	-57.2
5.0	0.736	-95.5	4.683	89.0	0.080	31.5	0.466	-69.3
6.0	0.657	-111.4	4.309	73.9	0.086	22.2	0.437	-84.8
7.0	0.589	-129.0	3.951	60.4	0.091	15.0	0.427	-91.9
8.0	0.549	-148.7	3.736	46.7	0.097	6.7	0.399	-99.8
9.0	0.531	-155.8	3.519	33.3	0.101	-3.0	0.276	-120.8
10.0	0.472	-170.6	3.390	20.1	0.102	-6.0	0.294	-144.1
11.0	0.427	160.9	3.173	6.5	0.106	-14.1	0.330	-145.0
12.0	0.443	138.7	3.007	-6.3	0.107	-21.1	0.291	-146.4
13.0	0.484	128.8	2.870	-20.5	0.114	-29.6	0.254	168.5
14.0	0.443	112.4	2.679	-34.6	0.113	-39.6	0.304	139.3
15.0	0.464	88.7	2.434	-47.9	0.109	-46.4	0.293	145.2
16.0	0.514	66.6	2.344	-61.5	0.110	-54.6	0.255	144.9
17.0	0.532	68.8	2.277	-75.2	0.116	-63.1	0.339	91.6
18.0	0.532	50.3	2.024	-87.9	0.113	-70.5	0.411	89.7
19.0	0.573	35.5	1.955	-98.2	0.118	-80.0	0.347	88.4
20.0	0.634	21.2	1.904	-111.2	0.113	-91.2	0.314	77.2
21.0	0.587	15.3	1.823	-129.0	0.114	-103.3	0.483	47.3
22.0	0.585	7.8	1.672	-139.1	0.110	-110.5	0.529	52.6
23.0	0.628	-10.7	1.658	-153.8	0.117	-124.2	0.375	43.3
24.0	0.642	-26.5	1.611	-172.2	0.120	-140.5	0.404	15.5
25.0	0.572	-40.1	1.491	171.7	0.115	-154.2	0.553	6.6
26.0	0.623	-43.2	1.455	160.9	0.124	-162.8	0.465	5.2

EPA025A-70				
Noise Parameters				
Vds=2V, Ids=15mA				
Freq.	Popt		Nfmin	Rn/50
(GHz)	(MAG)	(ANG)	(dB)	
2	0.73	25	0.37	0.22
4	0.64	55	0.46	0.18
6	0.49	81	0.56	0.14
8	0.42	107	0.64	0.11
10	0.32	135	0.76	0.08
12	0.26	173	0.88	0.08
14	0.28	-156	1.08	0.12
16	0.32	-103	1.31	0.24
18	0.37	-55	1.51	0.37
20	0.44	-25	1.65	0.51
22	0.44	-15	1.88	0.59
24	0.46	25	2.05	0.69
26	0.44	39	2.29	0.49

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.