

Programmable Video Signal Generator

VG-870B/ VG-871B

Instruction Manual

Ver 1.31



Programmable Video Signal Generator

VG-870B/ VG-871B

Instruction Manual

2009.12

Ver.1.31

Contents

	Intro	duction		X	
	Safe	ty precauti	ions	X	
	Wha	t is packed	d with the generator	xiv	
Chapter 1	CONCERNING THE VG-870B/871B				
	1.1	General	l description	1	
	1.2	Feature	es	1	
	1.3	Data co	onfiguration	2	
	1.4	Panel pa	parts and their functions	3	
		1.4.1	VG-870B front panel	3	
		1.4.2	VG-871B front panel	3	
		1.4.3	RB-1870/RB-1871 panel	3	
		1.4.4	Names of the keys and their functions	5	
		1.4.5	VG-870B/871B rear panel	7	
		1.4.6	Names of connectors and their applications	7	
		1.4.7	VG-870B/871B side panel	8	
		1.4.8	Tools used to operate the VG-870B/871B	8	
	1.5	VG-870	0B/871B video units	9	
		1.5.1	HDMI unit	9	
		1.5.2	TV encoder unit	g	
		1.5.3	PC analog unit	10	
		1.5.4	DVI unit	10	
		1.5.5	LVDS unit	10	
		1.5.6	Parallel unit	11	
		1.5.7	DP unit	11	
		1.5.8	iTMDS unit	11	
		1.5.9	iTMDS Quad unit	12	
		1.5.10	V-by-One HS unit	12	
		1.5.11	SDI unit	12	
Chapter 2	OPE	RATION P	PROCEDURES	13	
	2.1	Flow of	basic operations	13	
		2.1.1	Settings required for displays	13	
		2.1.2	Selecting the timing data	14	
		2.1.3	Selecting the pattern data	15	
		2.1.4	Selecting the actions	17	
	2.2	Saving t	the program data	20	
	2.3	Setting	the names	21	
	2.4	Groups		22	

		2.4.1	Executing groups	22		
		2.4.2	Setting and saving groups	22		
	2.5	Automati	ic execution	24		
	2.6	Displays	appearing on the VG-871B fluorescent display tube	26		
Chapter 3	TIMIN	NG DATA S	ETTINGS	27		
	3.1	Horizonta	al timing data editing	27		
		3.1.1	Horizontal timing data	27		
		3.1.2	Restrictions on the horizontal timing parameters	27		
		3.1.3	Horizontal timing data setting procedure	28		
	3.2	Vertical t	iming data editing	29		
		3.2.1	Vertical timing data	29		
		3.2.2	Restrictions on the vertical timing parameters	29		
		3.2.3	Vertical timing data setting procedure	32		
		3.2.4	Concerning the scanning modes	33		
		3.2.5	Concerning the TV modes	33		
		3.2.6	Concerning Serration and EQP	34		
		3.2.7	Concerning EQP-Fp and EQP-Bp	35		
Chapter 4	INTERFACE SETTINGS					
•	4.1	Output se	ettings	39		
		4.1.1	Setting the output interfaces to ON or OFF	39		
		4.1.2	Setting the sync signals to ON or OFF and setting the sync signal polarities			
		4.1.3	Setting the level mode	42		
		4.1.4	Setting the aspect ratio	43		
		4.1.5	Setting the bit length (gray scale) for pattern drawing	45		
		4.1.6	Selecting RGB or YPbPr and setting the color difference coefficients	47		
		4.1.7	Setting the analog level (temporary settings)	49		
		4.1.8	Setting the digital level (temporary settings)	50		
		4.1.9	Audio sweep settings			
		4.1.10	Setting the audio level (temporary settings)			
	4.2	HDMI				
		4.2.1	Connectors and pin assignments	53		
		4.2.2	HDMI setting procedure			
		4.2.3	InfoFrame/Packet			
		4.2.4	CEC function	74		
		4.2.5	Embedded audio, high bit rate audio (option)			
		4.2.6	EDID			
		4.2.7	HDCP			
		4.2.8	DDC/CI			
		4.2.9	LipSync			

	4.2.10	VD-1673 (HDMI SWITCHER)	79
4.3	DVI		80
	4.3.1	Connectors and pin assignments	80
	4.3.2	DVI unit setting procedure	81
	4.3.3	PC analog unit (DVI) setting procedure	83
	4.3.4	DVI data transfer systems	84
	4.3.5	Sync signal polarity setting	87
	4.3.6	EDID	87
	4.3.7	HDCP	87
	4.3.8	DDC/CI	87
4.4	iTMDS, iT	FMDS Quad	88
	4.4.1	Connectors and pin assignments	88
	4.4.2	iTMDS (4K×2K) unit setting procedure	90
	4.4.3	iTMDS data transfer systems	93
	4.4.4	Sync signal polarity settings	.112
4.5	LVDS		.113
	4.5.1	Connectors and pin assignments	.113
	4.5.2	LVDS setting procedure	.114
	4.5.3	Data transfer system	.118
	4.5.4	Bit arrays	131
4.6	Parallel		134
	4.6.1	Connectors and pin assignments	134
	4.6.2	Parallel data setting procedure	135
4.7	Analog co	omponent signals	138
	4.7.1	Connectors and output signals	138
	4.7.2	Setting the analog output connectors	138
	4.7.3	Setting the analog video level	139
	4.7.4	Sync signal settings	139
4.8	Composit	e connector and Y/C connector (S connector)	140
	4.8.1	Connectors and output signals	140
	4.8.2	Composite signal filter settings	141
	4.8.3	Setting the ID signals (Y/C)	142
	4.8.4	Functions available with TV standard signals	142
4.9	D5 (D cor	nnector)	143
	4.9.1	Connectors and pin assignments	143
	4.9.2	ID signals	143
4.10	VGA (D-S	Sub)	145
	4.10.1	Connectors and pin assignments	145
	4 10 2	Video level settings	1/15

		4.10.3	Sync signal settings	145
		4.10.4	EDID	145
		4.10.5	DDC/CI	145
	4.11	SCART		146
		4.11.1	Connectors and pin assignments	146
		4.11.2	SCART setting procedure	147
		4.11.3	Functions available with TV standard signals	148
		4.11.4	Filter settings	148
		4.11.5	Concerning the fast blanking signal	149
		4.11.6	Audio settings	149
	4.12	DisplayF	Port	150
		4.12.1	Connectors and pin assignments	150
		4.12.2	DisplayPort setting procedure	151
		4.12.3	Displaying the DisplayPort setting information	158
		4.12.4	DisplayPort Analysis	161
		4.12.5	Enbeded audio	165
		4.12.6	EDID	165
		4.12.7	HDCP	165
		4.12.8	DDC/CI	165
	4.13	V-by-On	e HS	166
		4.13.1	Connectors and pin assignments	166
		4.13.2	V-by-One HS setting procedure	167
		4.13.3	Data transfer systems	169
		4.13.4	V-by-One HS Control	185
	4.14	SDI		186
		4.14.1	Concerning the SDI output	186
		4.14.2	SDI setting procedure	186
		4.14.3	Embedded audio	188
	4.15	Analog a	audio settings	189
		4.15.1	Connectors and output signals	189
		4.15.2	Analog audio signals	189
	4.16	Digital a	udio	191
		4.16.1	Digital audio	191
		4.16.2	Audio sweep settings	198
		4.16.3	Flash data entry (option)	198
	4.17	Audio sv	weep setting	198
Chapter 5	FUNC	CTIONS A	VAILABLE WITH TV STANDARD SIGNALS	199
	5.1	Macrovi	sion	200
		5.1.1	Description and specifications	200

		5.1.2	Setting procedure	201	
	5.2	Closed	captions/V-Chip	202	
		5.2.1	Description and specifications	202	
		5.2.2	Closed caption settings	203	
		5.2.3	V-Chip settings	208	
	5.3	Teletext		213	
		5.3.1	Description and specifications	213	
		5.3.2	Setting procedure	214	
	5.4	WSS		218	
		5.4.1	Description and specifications	218	
		5.4.2	Setting procedure	219	
	5.5	CGMS -	-A/ID-1	221	
		5.5.1	Description and specifications	221	
		5.5.2	Setting procedure	222	
Chapter 6	PATT	ERN SET	TINGS	225	
	6.1	Color ba	ar patterns	225	
		6.1.1	Types of color bar patterns	225	
		6.1.2	Color bar pattern customizing	226	
	6.2	Gray sc	Gray scale patterns		
		6.2.1	Types of gray scale patterns	229	
		6.2.2	Gray scale pattern customizing	230	
	6.3	Ramp p	atterns	233	
		6.3.1	Types of ramp patterns	233	
		6.3.2	Ramp pattern type settings and customizing	234	
	6.4	Sweep	patterns	237	
		6.4.1	Types of sweep patterns	237	
		6.4.2	Sweep pattern selection	238	
	6.5	Monosc	ope patterns	239	
		6.5.1	Types of monoscope patterns	239	
		6.5.2	Monoscope pattern selection	239	
	6.6	Raster p	patterns	241	
		6.6.1	Types of raster patterns	241	
		6.6.2	Raster pattern type settings and customizing	241	
	6.7	Aspect i	ratio patterns	243	
		6.7.1	Types of aspect ratio patterns	243	
		6.7.2	Aspect ratio pattern type settings and customizing	244	
	6.8	Checker	rboard patterns	247	
		6.8.1	Types of checkerboard patterns	247	
		6.8.2	Checkerboard pattern customizing	248	

	6.9	image/O	P1	251
		6.9.1	Types of Image/OPT	251
		6.9.2	Option and image patterns setting	252
		6.9.3	Moving images settings (option)	253
		6.9.4	9-marker (OPT No.76) settings	254
	6.10	□× AE	BC patterns	257
		6.10.1	Color settings	258
		6.10.2	Character patterns	259
		6.10.3	Crosshatch patterns	260
		6.10.4	Dot patterns	262
		6.10.5	Circle patterns	263
		6.10.6	Burst patterns	266
	6.11	Window	patterns	268
		6.11.1	Types of window patterns	268
		6.11.2	Window pattern settings	269
	6.12	Cursor p	patterns	272
		6.12.1	Cursor settings	272
		6.12.2	Cursor operations	275
	6.13	Name/Li	st	277
		6.13.1	Name/List display	277
		6.13.2	Name	279
		6.13.3	EDID	281
		6.13.4	DDC/CI	284
		6.13.5	HDCP(High-bandwidth Digital Content Protection)	286
		6.13.6	HDMI list	288
		6.13.7	Timing data list	289
		6.13.8	Image pattern list	290
		6.13.9	OPT-USER pattern list	290
		6.13.10	Subtitle	291
	6.14	Video bla	ack/white reversal	293
	6.15	Simple a	animation	293
		6.15.1	Creating and registering the images	293
		6.15.2	Simple animation settings	294
Chapter 7	ACTI	ON SETTI	NGS	295
	7.1	Concern	ing the planes	295
	7.2	Window	actions	296
		7.2.1	Scrolling	296
		7.2.2	Flickering	298
		7.2.3	Level up/down actions	299

		7.2.4	Level sequence action	300		
	7.3	Graphic	plane scrolling actions	302		
	7.4	Charact	er plane scrolling actions	304		
	7.5	Subtitle	Subtitle scrolling			
	7.6	0.25- an	nd 0.125-dot scrolling actions (option)	308		
	7.7	Motion b	plur	311		
	7.8	Scroll Se	equence	316		
	7.9	LipSync		318		
	7.10	Black in:	sertion action	320		
Chapter 8	HDCI	P SETTIN	GS AND EXECUTION	321		
	8.1	HDCP s	settings	321		
	8.2	HDCP e	execution	322		
		8.2.1	Execution procedure	322		
		8.2.2	Screen displays during HDCP execution	324		
Chapter 9	VG-8	70B/871B	SYSTEM SETTIGS	327		
	9.1	System	settings	327		
		9.1.1	Beep setting	327		
		9.1.2	Key lock setting	328		
		9.1.3	RS-232C settings	329		
		9.1.4	LAN settings	330		
		9.1.5	INC/DEC continuity setting	331		
		9.1.6	INC/DEC interval setting	331		
		9.1.7	Color depth setting	332		
		9.1.8	SAMPLE RGB/YPbPr setting	332		
		9.1.9	DDC clock setting	333		
		9.1.10	Trigger mode settings	334		
		9.1.11	Image - priority settings	338		
		9.1.12	Image Position Setting	339		
		9.1.13	Cursor coordinate setting	340		
		9.1.14	Mouse speed setting	341		
		9.1.15	High-speed drawing mode setting	342		
		9.1.16	CUUSTOM Key1, 2, RB-1871 CUSTOM Key	343		
		9.1.17	Operation mode at power-on	344		
Chapter 10	OTHE	ER FUNC	TIONS	345		
	10.1	Copying	g and erasing data	345		
		10.1.1	Copying programs	345		
		10.1.2	Copying user characters	347		
		10.1.3	Copying user optional patterns	348		

		10.1.4	Copying images	349
		10.1.5	Copying subtitle	350
		10.1.6	Copying groups	351
		10.1.7	Copying auto executions	352
		10.1.8	Copying all data	353
		10.1.9	Erasing programs	354
		10.1.10	Erasing user characters	354
		10.1.11	Erasing user optional patterns	355
		10.1.12	Erasing images	355
		10.1.13	Erasing subtitle	356
		10.1.14	Erasing groups	356
		10.1.15	Erasing automatic executions	357
		10.1.16	Erasing all data	357
	10.2	Short-cu	t keys	358
	10.3	Informati	on	359
	10.4	Data initi	alization	360
		10.4.1	Initializing the system settings	360
		10.4.2	Initializing the short-cut data	361
	10.5	Formattii	ng	362
		10.5.1	Formatting the CF card	362
		10.5.2	Formatting CF cards for exclusive use of moving images	363
		10.5.3	Internal memory formatting and data installation	364
	10.6	Adjustme	ents	367
		10.6.1	Adjusting the RGB video levels of the PC analog unit	367
		10.6.2	Adjusting the YPbPr video levels of the TV encoder unit	368
		10.6.3	Adjusting the COMPOSITE/SCART video levels of the TV encoder unit	369
Chapter 11	SPEC	CIFICATIO	NS	371
	11.1	Main spe	ecifications	371
		11.1.1	Common specifications	371
		11.1.2	HDMI unit	372
		11.1.3	TV encoder unit	373
		11.1.4	PC analog unit	373
		11.1.5	DVI unit	374
		11.1.6	LVDS unit	374
		11.1.7	PARALLEL unit	374
		11.1.8	DP unit	375
		11.1.9	iTMDS, iTMDS Quad unit	376
		11.1.10	V-by-One HS unit	377
		11.1.11	SDI unit	378

		11.1.12	Moving image module	379	
		11.1.13	External control	379	
		11.1.14	General specifications	379	
	11.2	Connecto	or specifications	380	
		11.2.1	RS232C-Connector	380	
		11.2.2	Trigger-Connector	380	
	11.3	Internal o	datadata	381	
		11.3.1	Program data	381	
		11.3.2	Optional pattern data	425	
		11.3.3	User character pattern data	428	
		11.3.4	Character pattern data	433	
		11.3.5	Tables of standard signals	441	
Chapter 12	PREC	CAUTIONA	RY ITEMS	447	
	12.1	Difference	es between the generator models	447	
	12.2	Relations	ships between pattern drawing bit length and dot clock frequency	447	
		12.2.1	HDMI unit	447	
		12.2.2	TV encoder unit	449	
		12.2.3	PC analog unit	450	
		12.2.4	DVI unit	451	
		12.2.5	LVDS unit	452	
		12.2.6	Parallel unit	453	
		12.2.7	DP unit	454	
		12.2.8	iTMDS unit	455	
		12.2.9	V-by-One HS unit	459	
	12.3	Concerni	ing the maximum current consumption of the DDC (DP_PWR) power supply	460	
Chapter 13	LIST	OF ERRO	R MESSAGES	461	
	13.1	Media-re	lated error	461	
	13.2	General	error	461	
	13.3	HDCP-re	elated error	464	
	13.4	User-generated optional pattern-related error			

BEFORE OPERATING THE GENERATOR

Introduction

Thank you very much for purchasing this model VG-870B/871B video signal generator.

This manual contains details on the operation procedures to be followed when the VG-870B/871B is used, the checkpoints and precautions to be observed, and so on. Improper handling may result in malfunctioning so before using the VG-870B/871B, please read through these instructions to ensure that you will operate the generator correctly.

After reading through the manual, keep it in a safe place for future reference.

Safety precautions

AWARNING

Concerning the generator

- Do not subject the generator to impact or throw it. Doing so may cause the generator to malfunction, explode or generate abnormally high levels of heat, possibly resulting in a fire.
- Do not use the generator where there is a danger of ignition or explosions.
- Do not place the generator inside a microwave oven or other heating kitchen appliance or inside a high pressure vessel. Doing so may heat up the generator to abnormally high levels, cause smoking, running the risk of the generator's catching fire and/or damaging the circuit components.
- This generator contains some high-voltage parts. If you touch them, you may receive an electric shock and burn yourself so do not attempt to disassemble, repair or remodel the generator.
- If there is a thunderstorm while the generator is being used outdoors, immediately turn off its power, disconnect the power cable from the main unit, and move the generator to a safe place.

Concerning the power cord

- Always take hold of the molded part of the plug when disconnecting the power cord.
- Do not use force to bend the power cord or bunch it up for use. Doing so may cause a fire.
- Do not place heavy objects on top of the power cord. Doing so may damage the cord, causing a fire or electrical shock.

Concerning foreign matter

■ Do not spill liquids inside the generator or drop inflammable objects or metal parts into it. Operating the generator under these conditions may cause a fire, electric shocks and/or malfunctioning.

ACAUTION

Concerning the generator

When connecting the generator to a display unit, use the FG cable provided to connect the frame ground (FG) terminal on the generator to the frame ground terminal on the display unit. If these terminals are not connected together, the generator may fail. Take special care when connecting the generator to a display unit which is under development.



- When disconnecting the VG-870B/871B from the display unit, first disconnect the connecting cables, and then disconnect the FG cable.
- When the generator's power is to be turned ON or OFF, be absolutely sure to use the POWER switch on the front panel. Turning the power on and off by plugging in and unplugging the AC power cable may damage the PC card.
- Do not start using the generator straight away: instead, turn on the power of the VG-870B/871B and allow it to warm up for about 10 to 15 minutes before use so as to ensure that the VG-870B/871B will operate stably.
- It is forbidden to remove the video units from the generator main unit.
- A CompactFlash (CF) card slot is provided on the front panel. The LED at the side of the slot flashes while the data on the CF card is being accessed. Under no circumstances must the card be ejected while this LED is flashing. Otherwise, malfunctioning may result.
- Never unscrew and open the FC card slot (for the moving image module) cover on the side panel of the main unit while the main unit power is turned on. Malfunctioning may result if the cover or the screw should drop into the chassis of the main unit.

Concerning impact

- This is a precision instrument and, as such, subjecting it to impact may cause malfunctioning. Take special care when moving the generator.
- Do not drop the generator.

Concerning installation

Install the generator in a stable location. Do not stand it on either of its side panels. Doing so may cause the generator's temperature to rise due to heat generation, possibly resulting in malfunctioning.

When trouble or malfunctioning has occurred

■ In the unlikely event that trouble or malfunctioning should occur, disconnect the generator's power cable, and contact your dealer or an ASTRODESIGN sales representative.

What is packed with the generator

The generator comes with the following items.

Be absolutely sure to use only the genuine accessories which are supplied with this generator since the use of any non-designated items may cause malfunctioning.

Standard accessories

- VG-870B/871B main unit
- CD with VG-870B/871B instruction manual (what you are now reading): 1 disc
- CompactFlash (CF) card: 1 pc
- CompactFlash (CF) card case: 1 pc
- SP-8870 software installation CD (for Windows): 1 pc
- SP-8870 instruction manual: PDF version (packed with the SP-8870 software installation CD)
- Power cable: 1 pc³
- FG cable (1.5 meters long): 1 pc *1
- *1: These cables are designed to be used exclusively with the VG-870B/871B.

Optional accessories

• RB-1870:

Remote control box used exclusively *2 with the VG-870B/871B

RB-1871:

Simplified remote control box used exclusively *2 with the VG-870B/871B

This remote control box is used exclusively for executing program data, timing data, pattern data and other operations so it cannot be used for setting operations.

*2: These remote control boxes are not compatible with the existing VG series other than VG-870/871/870A/871A.

1.1 General description

The VG-870B/871B video signal generator supports applications in every field of display test and measuring.

It features a high level of expandability which is achieved by the installing video output interface units.

1.2 Features

■ 16-bit high-speed imaging engine

This generator features a maximum 16-bit × RGB high-gradation imaging engine. It even draws full HD images in an instant.

■ Wide dot clock frequency range

The VG-870B supports dot clock frequencies up to 340 MHz. The VG-871B supports a maximum dot clock frequency of 250 MHz for analog outputs and a maximum dot clock frequency of 340 MHz for digital outputs.

■ Windows-compatible editing and registration software (SP-8870) provided as standard accessory

This software can be used to edit and register the program data and exercise control over the signals output from the PC connected to the RS-232C/LAN/USB connector.

Full variety of sample data incorporated inside

A total of a thousand types of timing data and a thousand types of pattern data are registered inside the VG-870B/871B as sample data. They are categorized by standard, application and other factors, and it is possible for the data required to be selected easily.

Registration of program data on PC cards

A total of a thousand program data can be registered on a PC card. PC screens or natural images can also be registered. On a PC equipped with a PC card slot, the data can be copied using Explorer provided with Windows 98SE, Windows 2000 or Windows XP.

Creation of user option patterns

In addition to the existing basic patterns (including character, crosshatch, color bar and gray scale) and optional patterns, a function that allows users to create their own optional patterns has been added. This function makes it possible to create the optional patterns which are useful for developing and evaluating the next-generation displays.

Selection and installation of up to three video units possible

In line with the operating environment, users can select up to three kinds of video units from the six kinds of output units available. In addition, a multiple number of video units of the same kind can be installed, and Astrodesign also provides units which are customized to the needs of the users.

Output of uncompressed movies

10-bit uncompressed movies can be output from the output unit which the user has selected.

* When units are to be added or replaced, please contact Astrodesign.

1.3 Data configuration

The data output by the VG-870B/871B is managed by the program data.

The program data consists of the pattern data which is used to set the data relating to the output images and the timing data which is used to set the data relating to all other output timing data and output conditions.

The table below gives a breakdown of the data.

Block		Description
Timing data	Program Name	Program name
	Timing	Timing
	Output	Output condition
	AUDIO	Audio output
Pattern data	Pattern	Pattern
	Action	Pattern action

A number of types of program data, optional patterns and user character patterns are contained as sample data inside the VG-870B/871B.

	Number of data	
Timing data	1000 sets (1001 to 2000)	
Pattern data	1000 sets (1001 to 2000)	
Optional patterns	200 (1 to 200)	
User character patterns	16 (F0H to FFH)	

The various data can be registered in the <u>internal memory (approx. 100 MB)</u> of the VG-870B/871B or on CF cards.

	Number of data		
Program data	1000 (1 to 1000)	1000 (1 to 1000)	
User option patterns	200 (1 to 200)		
Images (image data)	200 (1 to 200)	200 (1 to 200)	
	 Number of data depends on the image data size, memory capacity and card capacity. 		
User character patterns	16 (E0H to EFH)		
Number of characters in program names	20 characters		
Number of groups	99 (1 to 99)	* For further details on groups, refer to	
Number of group data	98 (1 to 98)	"2.4 Groups."	
Number of characters in group names	20 characters		




When a CF card has been inserted, the data registered on that card becomes valid, and the data registered in the internal memory becomes invalid.

In the case of image data, both the data on a CF card and the data in the internal memory can be made valid. *


* For further details, refer to "9.1.11 Image - priority settings."

1.4 Panel parts and their functions


1.4.1 VG-870B front panel

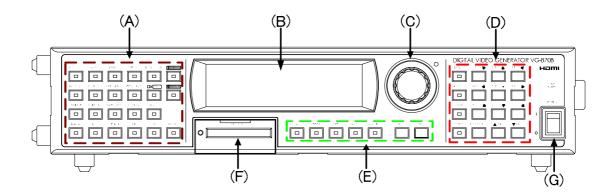


1.4.2 **VG-871B** front panel

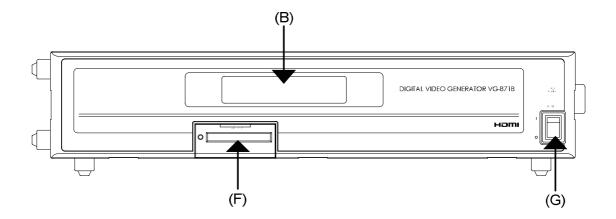

1.4.3 RB-1870/RB-1871 panel

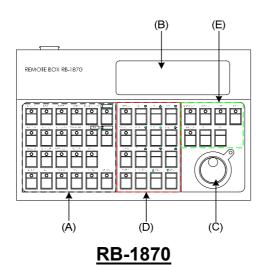



RB-1871

Some restrictions apply to operating the RB-1871. The operable items are described below.

- Selecting and executing programs


- Execution of grouped programs (but group editing is not possible)
 ON/OFF operations of R, G, B and INV keys
 ON/OFF operations of CUSTOM (I, II) keys (default = I: HDCP, II: MUTE)
- Adjustment of levels (digital video levels only)
- For further details on the keys, refer to "1.4.4 Names of the keys and their functions."

1.4.4 Names of the keys and their functions

(A)	Pattern keys	color DXABC etc.	Used to display and edit the patterns.	
	Action key	ACTION	Used when setting the scroll, flicker and other functions.	
	Level key	LEVEL	Used to set the digital video levels, analog video levels and audio levels.	
	RGB channel on/off	etc.	Used to set R, G and B on or off.	
	INV key	INV	Used to invert the black and white of the video levels.	
	SYNC key	SYNC	Used to set the sync on or off.	
	Detail key	DETAIL	Used to perform the detailed settings of the pattern data, timing data, etc.	
	HDCP key (custom key)	I HDCP	Used to set HDCP on or off. (HDCP is a system for protecting content used by HDMI and DVI.)	
	MUTE key (custom key)		Used to set the audio on or off (muted).	
			* When setting HDMI AV-MUTE This key functions as the HDMI AV-MUTE On/Off setting. (Refer to "9.1.16 CUUSTOM Key1, 2, RB-1871 CUSTOM Key".)	
(B)	Menu operation screens	MONUMENT EDITOR STATE OF THE ST	The menu screens are used to set and check the items displayed on the fluorescent display tube.	
(C)	Rotary switch		This is turned clockwise or counterclockwise to select the setting items or parameters, change the level settings, etc.	
(D)	Number keys	o∕status 9/F 為	Used to input numerical values, select the menus, etc.	
	INC/DEC	∆ INC ▼ DEC	Used to select the setting items or parameters, change the level settings, change the program numbers, etc.	
	Menu	MENU	Used to display the menu screens. When it is pressed while a menu screen is already displayed, the initial screen is restored.	
			* When the menu key indicator is lighted It is no longer possible to use any of the other keys.	
	Short-cut key	SHORT CUT	Used to move to a user-registered menu screen using minimal key operations.	
	Save key	SAVE	Used to save the data which has been set.	
	Shift key	SHIFT	Used to input letters of the alphabet with the number keys.	

(E)	Category key	CATEGORY	Used to select the internal sample data by category.	
	Sample key	SAMPLE	Used when the internal sample data is used.	
			* When the sample key indicator is off The data stored on CF cards or stored in the internal memory can be used.	
	Timing key	TIM	Used to display changeable lists when only the output timing data is to be changed.	
	Pattern key		Used to display changeable lists when only the output pattern data is to be changed.	
Group RCy		GROUP	Used to display user-registered groups, etc. and create groups.	
	Escape key		 This key can be used in the following situations When canceling parameter selections or numerical value settings When returning the displayed menu screen to the previous hierarchical level 	
	Set key	SET	Used to enter the setting items and parameters which have been set.	
(F)) CF card slot		Used for inserting a CF card or accessing the memory on a CF card.	
(G)	Power switch		Used to turn the power of the VG-870B/VG-871B on and off.	


1.4.5 VG-870B/871B rear panel

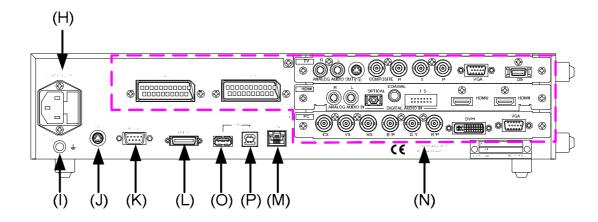

1.4.6 Names of connectors and their applications

(H)	AC power socket		Connect the power cable here.	
			Any voltage from 100 V to 240 V is supported.	
(1)	Frame ground	€	Connect this frame ground terminal to the frame ground terminal of the unit which is connected to the VG-870B/871B.	
(J)	TRIG connector	TRIG	This is the trigger input/output connector.	
(K)	RS-232C connector	RS-232C	This is used to connect a personal computer using an RS-232C cable.	
(L)	Remote connector	REMOTE S	This is used to connect the dedicated remote control box (RB-1870 or RB-1871) to operate the generator by remote control.	
(M)	LAN port	LAN	This port is used for connection to a LAN using the Ethernet cable.	
(N)	Units		These connectors enable up to three interface units (VM18XX series) to be installed.	
(O)	USB (1)	1	This connector supports a regular USB mouse. * When the cursor is displayed Using the USB mouse, the pointer on the monitor can be moved.	
(P)	USB (2)		This connector is used to connect the generator with a PC to enable the VG-870B/871B to be operated using the SP-8870 software, etc. Refer to the instruction manual of the SP-8870 software for further details.	

1.4.7 VG-870B/871B side panel

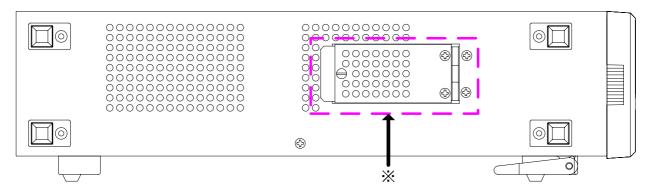

* Note

Open or close this cover when inserting or removing a CF card for the moving image module. Do not open the cover while the power is on.

1.4.8 Tools used to operate the VG-870B/871B

The table below lists the operation tools of this generator and the restrictions on the operation of each of these tools.


Operation tool	Restriction on operation	Remarks
VG-870B front panel controls	These enable all the generator functions to be operated.	The controls can be used only by the VG-870B main unit.
RB-1870	These enable all the generator functions to be operated.	This remote control box makes it possible to perform the same operations as the ones which are performed on the front panel of the VG-870B.
RB-1871	Programs can be read only. This is a simplified remo box which is intended fo production lines.	
SP-8870	These enable all the generator functions to be operated.	This software program is intended for performing operations and editing using a PC.

1.5 VG-870B/871B video units


The VG-870B/871B is constructed to allow video interface units to be installed. Video interface signals are output from these units. Up to three units can be installed.

* When one or more video units are to be replaced, please contact ASTRODESIGN.


1.5.1 HDMI unit

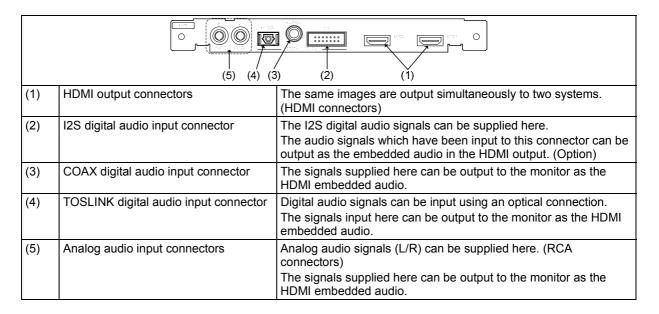


1.5.2 TV encoder unit

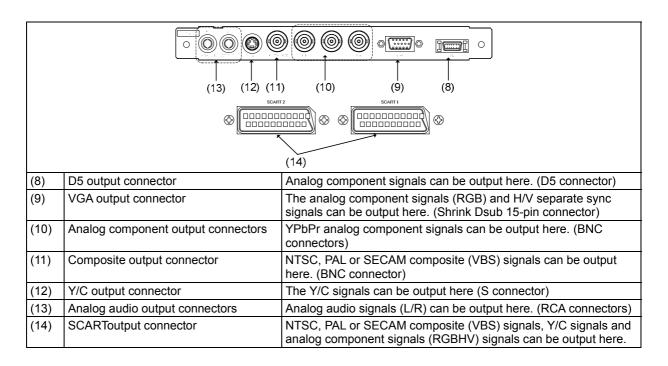


1.5.3 PC analog unit

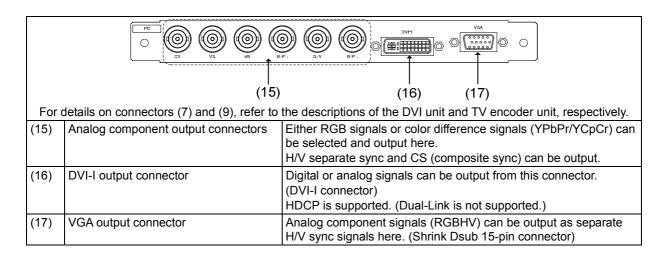


1.5.4 **DVI unit**

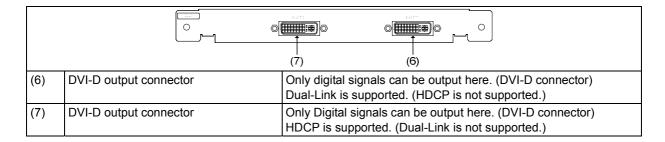

1.5.5 LVDS unit

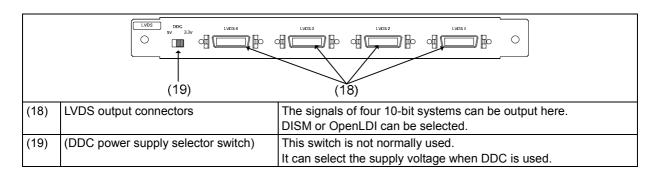


1.5.6 Parallel unit

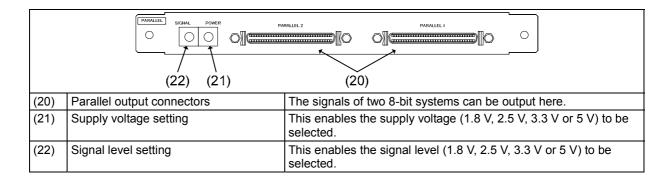

1.5.7 **DP unit**


	ADDIO N OPTICAL (24)	DisplayPort2 DisplayPort1 (23)
(23)	DisplayPort output	Two systems of split drawing signals can be simultaneously output here.
(24) TOSLINK digital audio input		This connector enables digital audio data to be input using an optical connection.
		Digital audio data can be output to the monitor as the embedded audio data of the DisplayPort output.

1.5.8 iTMDS unit

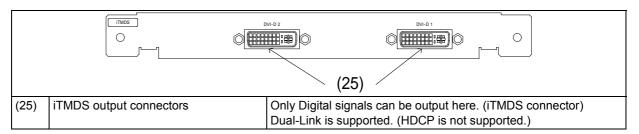


* This is scheduled to be supported by an update of the firmware version.

1.5.9 iTMDS Quad unit

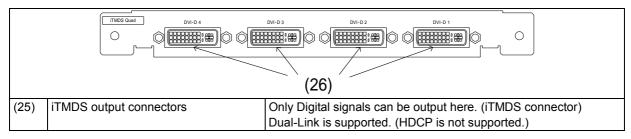


^{*} This is scheduled to be supported by an update of the firmware version.

1.5.10 V-by-One HS unit

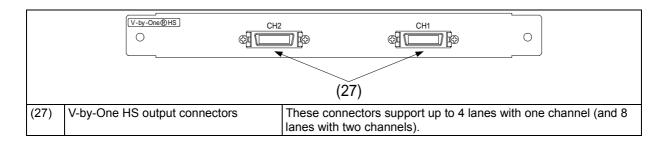

1.5.11 SDI unit

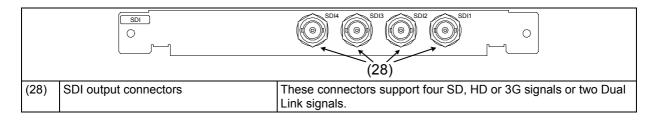



Do not attempt to remove the video units from the main unit due to the risk of damaging them. When units are to be added or replaced, please contact ASTRODESIGN.


OPERATION PROCEDURES

2.1 Flow of basic operations

2.1.1 Settings required for displays

The **timing data** and **pattern data** must be set in order for the test patterns to be displayed from the generator. The following items are set for these data.

In the case of this generator, the **timing data** and **pattern data** are collectively referred to as the "**program data**."

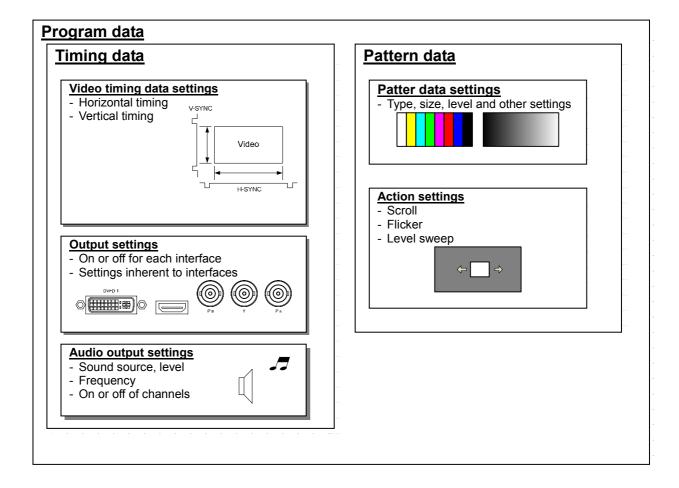


2.1.2 Selecting the timing data

There are two ways to select the timing data.


- 1) Input the timing data numbers directly.
- 2) Select the timing data from the categories.

1) Input the timing data numbers directly.

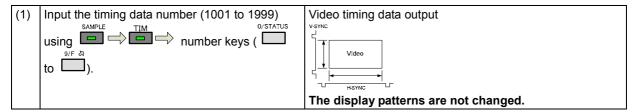

2) Select the timing data from the categories.

The timing data of the internal sample data is classified by category such as EIA or VESA (PC). Select the desired timing data from the category which contains it.

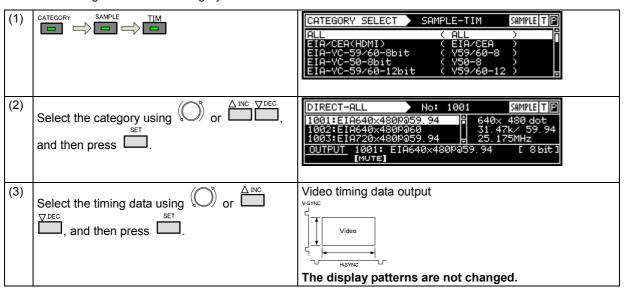


2.1.3 Selecting the pattern data


There are four ways to select the pattern data.

- 1) Input the pattern data numbers directly.
- 2) Select the pattern data from the categories.
- 3) Select the pattern data using the pattern keys.
- 4) Select the patterns for each program data.

1) Inputting the pattern data numbers directly



2) Selecting the pattern data from the categories

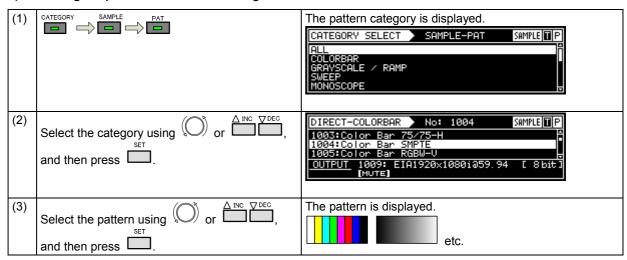

3) Selecting the pattern data using the pattern keys

(1)	Select the key corresponding to the pattern, such as or , to be displayed.	The pattern of the selected type is displayed.
		Lighted: selected; off: deselected.
(2)	When setting details for the pattern or changing the pattern type. Press .	The pattern selection screen is displayed. 7 100/100-H 8 100/75-H 9 75/75-H 4 SMPTE 5 RGBW-V 6 xvVCC 4½ 11 xvVCC 8½ 22 xvVCC 12½ 3 CUSTOM COLOR BAR 1/1
(3)	Select the pattern using or	The selected pattern is displayed.

4) Selecting the patterns for each program data


		I .	
(1)	Select Program Edit using or or	MENU Pro9ram Edit Pro9ram Name : ▶EIA1920x1080Pa60 Timin9 (TIM)	
(2)	Select Pattern (PAT) using or or or or and then press.	MENU Pattern Pattern/RGB/INU Select Color Bar Gray Scale Ramp Sweep Pattern P	
(3)	Select Pattern/RGB/INV Select using or or and then press.	MENU Pattern/RGB/INV Select Color Bar Gray Scale RamP Sweep Menoscope	
(4)	Select the item using \bigcirc or $\stackrel{\triangle \text{INC}}{\square}$ $\stackrel{\nabla \text{DEC}}{\square}$, and	The selected page	attern is indicated by a check mark 🔟.
		Color Bar	Check this to select the color bar pattern.
	then press	Gray Scale	Check this to select the gray scale pattern.
	Selected or deselected is displayed.	Ramp	Check this to select the ramp pattern.
	> Selected of deselected is displayed.	Sweep	Check this to select the sweep (sine wave) pattern.
		Monoscope	Check this to select the monoscope pattern.
		Raster	Check this to select the raster pattern.
		Aspect	Check this to select the pattern for checking the aspect ratio.
		Checker	Check this to select the checkerboard pattern.
		Image/OPT	Check this to select the bitmap image, an optional pattern, or a moving image.
		Character	Check this to select the character pattern.
		Cross Hatch	Check this to select the crosshatch pattern.
		Dot	Check this to select the dot pattern.
			Check this to select the frame pattern.
		×	Check this to select the cross pattern.
		+	Check this to select the center marker pattern.
		Circle	Check this to select the circle pattern.
		Burst	Check this to select burst (continuous black and white).
		Window	Check this to select the window pattern.
		Cursor	Check this to select the cursor pattern.
		Name/List	Check this to select the name/list function.
		R/Pr	Check this to set the pattern R (red) or Pr output on or off. Normally, this is kept checked.
		G/Y	Check this to set the pattern G (green) or Y (luminance) output on or off. Normally, this is kept checked.
		B/Pb	Check this to set the pattern B (blue) or Pb output on or off. Normally, this is kept checked.
		INV	Check this invert the black and white of the video level.


2.1.4 Selecting the actions

There are two ways to select actions.

- 1) Select the action using the action key.
- 2) Select and set the action for each program data.

1) Selecting the action using the action key

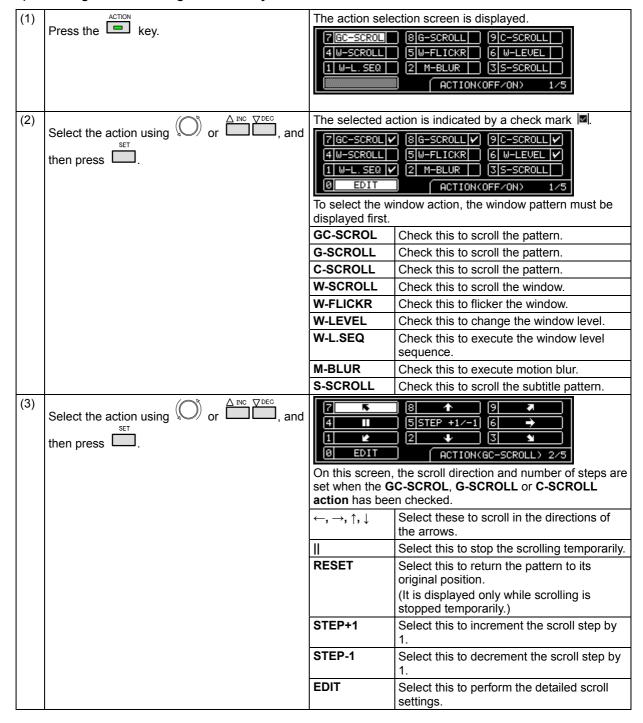

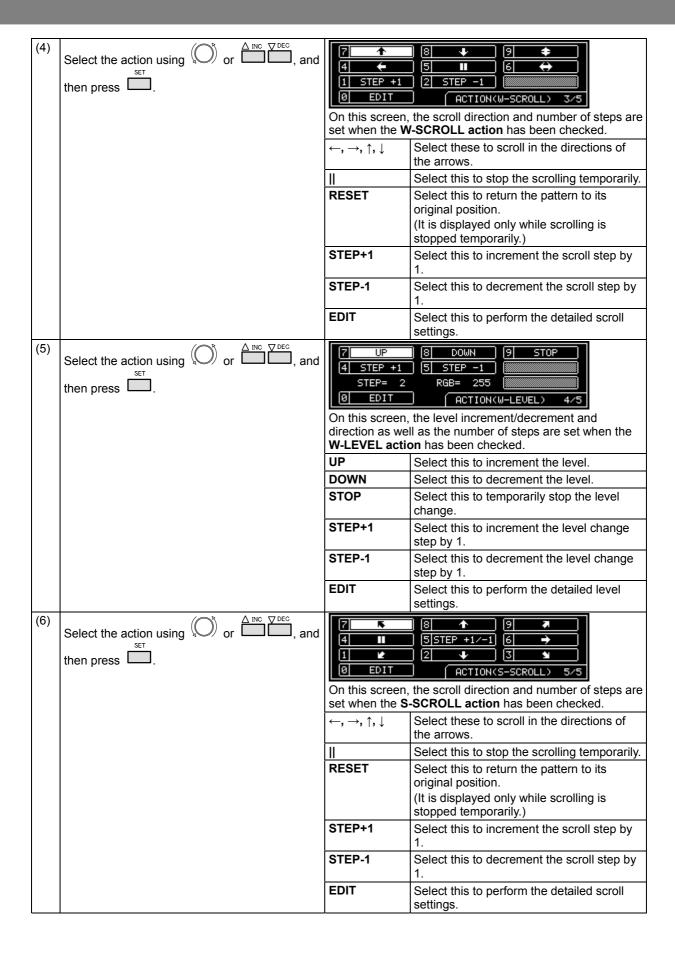

2) Select and set the action for each program data.

(1)	Select Program Edit using SET or and then press .	MENU		
(2)	Select Action (PAT) using SET or and then press .	MENU Action Graphic Plane		
(3)	△ INC ▼ DEC	One of the following actions is selected, and the detailed		
	Select the item using or , and	settings are performed.		
	then press .	For details on the setting procedure, refer to "ACTION SETTINGS."		
		Graphic Plane		
		Character Plane		
		Window		
		• Subtitle		
		Motion Blur A S		
		0.25 / 0.125 dot Scroll Lin Compa		
		Lip Sync Rlack Insertion		
		Black Insertion		

2.2 Saving the program data

Upon completion of program editing, save the data.

If the power is turned off without saving the data, the status before the changes were made will be restored.

(1)	SAVE	Pro9ram Data SAVE No.> Media : 1 > Internal Pro9ram Name: ▶EIA1920×1080ia59.94 Pattern Name: Color Bar SMPTE EXECUTE <	
(2)	Select the item using or or DEC, and	No.	The program number is set here. (0001 to 1000)
	then press .	Media	The internal memory or CF card is selected here.
		Program Name	Any name (containing up to 20 characters) can be allocated as the program name.
		Pattern Name	Any name (containing up to 20 characters) can be allocated as the pattern name.
(3)	Select \triangleright EXECUTE \triangleleft using \bigcirc or \bigcirc or \bigcirc \bigcirc \bigcirc \bigcirc	The program d	ata is saved.
	and then press		



If a CF card has been inserted, the data registered on the card will be enabled and the data registered in the internal memory will be disabled.

For the image data, it is possible to enable both the data registered on the CF card and the data in the internal memory.

* For further details, refer to "9.1.11 Image - priority settings."

2.3 Setting the names

When timing or pattern data is edited and the edited data is to be saved, the name used for the program can be changed.


(1)	Pro9ram Data SAVE No. > Media : > Internal Pro9ram Name: > EIRi920x1080i359.94 Pattern Name: Color Bar SMPTE > EXECUTE < Select Name using or AINC TOEC or AINC TOEC , and	Program Name ☐IA1920×1080Pa60 ☐CANCEL
(2)	To decide on the positions where the character changes are to be made: (when moving to the left) (when moving to the right)	The position where the character of the name is to be input changes. Program Name EIR1920x1080P060 Clear GDel BIns CANCEL COK CODE:34H # \$ % & ' () * + , / SHIFT 100G\$
	To delete all the characters:	All the characters already input for the name are cleared. Program Name Clear GDel BIns CANCEL CODE:34H ! " # \$ % & ' () * + , / 0 1 2 3 4 5 6 7 8 9 : ; < = > ? SHIFT 50G\$
	To delete one character:	The character at the cursor position is deleted. Program Name
	To change character insert/overwrite: Use this to switch between inserting and overwriting the characters.	Insert is switched to overwrite or vice versa. Pro9ram Name
	To input characters: Select the characters using , and enter them using .	The characters are input. Program Name
(3)	To enter the program name: Select OK using SET Select OK using SET	The name is changed.

2.4 Groups

Registering programs as "**groups**" is useful when specific programs are to be combined and used repeatedly.

Examples include times on a TV set inspection process when specific timing and pattern data are combined for repeated use.


It is possible to set not only the timing and pattern data execution sequence but the execution time of each program as well.

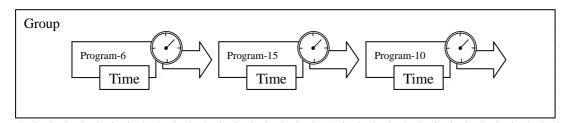

Up to 98 programs can be registered in a group. Up to 99 groups can be registered.


2.4.1 Executing groups

The combinations of programs and patterns which are used with a high frequency and which have been registered by the user can be executed.

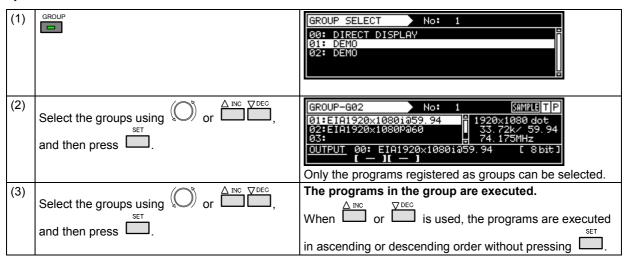

2.4.2 Setting and saving groups

The combinations of programs and patterns which are used with a high frequency can be saved.

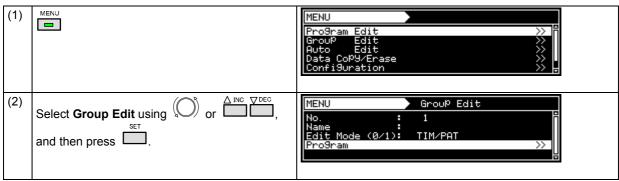


(3)	Select the items using \bigcirc or $\stackrel{\triangle \text{INC}}{\longleftarrow}$ $\stackrel{\nabla \text{DEC}}{\longleftarrow}$, and	No.	The number of the desired group is set here. (01 to 99)
	then press .	Name	Any name (consisting of up to 20 characters) can be allocated as the group name.
		Edit Mode	TIM/PAT: The timing data and pattern data are set separately. Program: The number of the program is designated here.
		Program	Depending on the Edit Mode setting, the display screen in (4) below will differ.
(4)	Select the numbers (01 to 98) of the TIM or PAT programs and AutoInterval using \bigcap_{SET} or \bigcap_{T} and then press \bigcap_{T} . The programs set in the group are executed in	MENU (TIM) 01: 0 02: 0 03: 0 04: 0	ris selected as the Edit Mode setting Program No: 1 (PAT) (AutoInterval) 0
	 sequence from 01 up to 98. If 0 is set for both TIM and PAT If 0 is set for Program In both of the above cases, 0 is recognized as the end of the group. 	01: 02: 03: 04:	Program No: 1 (M/PAT>
		TIM/PAT	The program numbers are set in this column.
		TIM	The timing data numbers are listed here.
		PAT	The pattern data numbers are listed here.
		AutoInterval	The execution times during Auto Display are set here (0 to 999 seconds).
(5)	This completes the setting operations. The group data is now saved. SAVE	No.> Media Name	Group Data SAVE ====================================
(6)	Select the items using or or or and, and	No.	The number of the group is set here. (01 to 99)
	then press .	Media	Internal: The group data is saved in the internal memory. CF Card: The group data is saved on an external CF card.
		Name	Any name (consisting of up to 20 characters) can be allocated.
(7)	Select EXECUTE using or	Yes No	Group Data SAVE nternal) Overwrite OK ? s Press SET key Press ESC key the saving of the group data.

2.5 Automatic execution


The data in the selected groups and program numbers can be automatically output in accordance with the delay time which has been set.

C2 Select Auto Edit using			
Select Auto Edit using or then press. Selecting the Mode setting Select Program or Group using or the program has been selected as the Mode setting or then press. (4) Select Setting using or then press or the program has been selected as the Mode setting. Select Setting using or the program has been selected as the Mode setting. Select Setting using or the program has been selected as the Mode setting. Select Setting using or the program has been selected as the Mode setting. Select Setting using or the program has been selected as the Mode setting. Select Setting using or the program has been selected as the Mode setting. Select Setting using or the program has been selected as the Mode setting. Select Setting using or the program has been selected as the Mode setting. The time during which each pattern is to be displayed is set here. The start and end points of programs to be repeated are set here. Automatic execution is performed in the following sequence: Start point 1 — end point 1 — start point 2 — end point 2 — start point 3 — end point 3. *When Group has been selected as the Mode setting? First Setting Setting Setting	(1)	MENU	Program Edit >> Group Edit >> Auto Edit >> Data Cop9/Erase >>
Select Program or Group using or Select Setting using or Select Setting Select Setting Select Setting Select Setting Select Setting Select Setting Select Select Setting Select Setting Select Setting Select Setting Select S	(2)	Select Auto Edit using or , and	Program Edit >> ° Group Edit >> ° Auto Edit >> ° Data Copy/Erase >> °
Select Setting using then press	(3)	Select Program or Group using or	Mode (0/1): ▶Pro9ram Settin9 >>
or image of the press in the pr		Select Setting using or , and then press .	Interval: The time during which each pattern is to be displayed is set here from 0 to 999 seconds. Program (Start-Stop): The start and end points of programs to be repeated are set here. The start and end point settings can be designated in three stages. Automatic execution is performed in the following sequence: Start point 1 → end point 1 → start point 2 → end point 2 → start point 3 → end point 3. <when as="" been="" group="" has="" mode="" selected="" setting="" the=""> MENU Setting Group No.: The number of the group to be executed automatically is set here. Interval The time during which each pattern is to be displayed is set here from 0 to 999 seconds. When 0 is set, execution accords with the group data setting. If the interval is not set in the group data, 0 seconds</when>
	(5)	or $\stackrel{\triangle}{\square}$ not then press $\stackrel{\text{SET}}{\square}$. To cancel automatic execution at any time, press	Mode (0/1): Program Setting >>

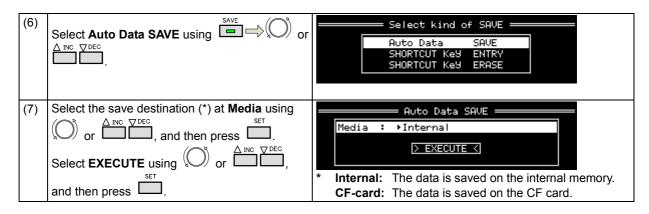

2.6 Displays appearing on the VG-871B fluorescent display tube

The following information appears on the VG-871B fluorescent display tube.

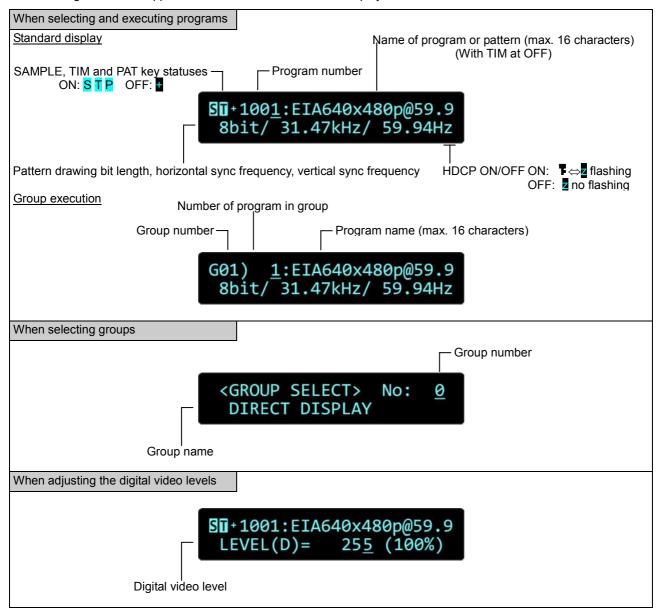


TIMING DATA SETTINGS

3.1 Horizontal timing data editing

3.1.1 Horizontal timing data

When making changes with the horizontal timing data, the parameters which can be set and the names of the parameters are indicated below.

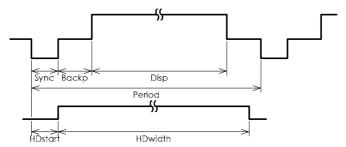


3.1.2 Restrictions on the horizontal timing parameters

The table below shows the restrictions on the parameters which can be changed with the horizontal timing data.

Setting item	Setting range	Parameter fixing function
Dot Clock	Depending on the number of bits which are output, the dot clock frequency is subject to some restrictions. For details, refer to "11.1.1 Common specifications."	
Priod	Time display: 0.00 to 999.999 µs Dot display: 128 to 8192 dots	μs setting fixed using SHIFT+2 dot setting fixed using SHIFT+3
Disp	Time display: 0.00 to 999.999 µs Dot display: 48 to 4096 dot	μs setting fixed using SHIFT+0 dot setting fixed using SHIFT+1
Backp, Sync	Time display: 0.00 to 999.999 µs Dot display: 0 to 8192 dot	
HDstart, HDwidth	Time display: 0.00 to 999.999 µs Dot display: 0 to 8190 dot	

* When a parameter is fixed, it is accompanied by an asterisk (*). Even when values other than ones for parameters with an asterisk have been changed, the values of the parameters with the asterisks remain fixed.

Example: When a us setting has been fixed using SHIFT+2 for Period



An asterisk is displayed here when the value is fixed.



When items are set in microseconds (µs), restrictions apply to these settings depending on the dot clock frequency and other timing data used for drawing.

The values for the blanking and frontp items are calculated automatically on the basis of the data presented above.

Item	Calculation formula	Setting range
Blanking	Blanking = Period - Disp	Time display: 0.00 to 999.999 μs
		Dot display: 40 to 8192 dots
Frontp	Frontp = Period - Disp - Sync - Backp	Time display: 0.00 to 999.999 µs
		Dot display: 0 to 8192 dots

3.1.3 Horizontal timing data setting procedure

Described below is the procedure used to set the parameters which can be changed with the horizontal timing data


(1)	Select Program Edit using or SET, and then press.	MENU	
(2)	Select Timing (TIM) using or or or or and then press.	MENU H-Timin9 V-Timin9	Timin9
(3)	Select H-Timing using or or in then press.	MENU InPut Mode Dot Clock RePetition Period DisP	H-Timin9 (0/1): dot : 74.175MHz : 1 : 29.660s 2200dot : 25.880s 1920dot
	<setting parameters="" the=""></setting>	Set the H-Timir	ng parameters.
	Select the items using or \triangle or \triangle , and	Input Mode	Select the input setting for the H-Timing parameters to µs: time [microseconds] or dot: number of dots [dots].
	then press	Dot Clock	The dot clock frequency (MHz) is set here.
	Alternatively: Select the parameter using the number keys orantus orantus to y/F & SET to in t	Repetition	The number of repetitions is set here. The pixel configuration depends on the number which is set in Repetition. When 2 is set for Repetition and 1440 for Disp, the number of pixels will be 720.
		Period	The total number of pixels in the horizontal direction is set here. <when (microseconds)="" as="" been="" has="" input="" mode="" selected="" setting="" the="" time="" µs:=""> It is possible to establish settings using both µs and dot parameters.</when>
		Disp	Set the Disp width in the horizontal direction here. <when (microseconds)="" as="" been="" has="" input="" mode="" selected="" setting="" the="" time="" µs:=""> It is possible to establish settings using both µs and dot parameters.</when>
		Sync	Set the Sync width in the horizontal direction here.
		BackP	Set the BackP width in the horizontal direction here.
		HDStart HDWidth	These parameters can be set only when the parallel unit has been installed.

3.2 Vertical timing data editing


The vertical timing setting locations and names of the settings are indicated below.

3.2.1 Vertical timing data

[For progressive scanning]

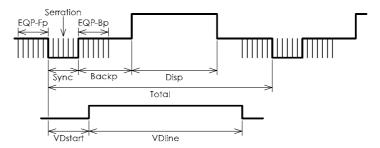

[For interlaced scanning]

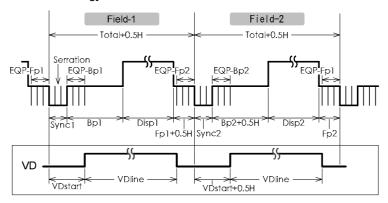

3.2.2 Restrictions on the vertical timing parameters

The table below shows the restrictions on the parameters which can be changed with the vertical timing data

<For progressive scanning>


Setting item	Setting range	Parameter fixing function
Total	Time display: 0.00 to 999.999 ms	ms setting fixed using SHIFT+2
	Dot display: 8 to 8192 H	H setting fixed using SHIFT+3
Disp	Time display: 0.00 to 999.999 ms	ms setting fixed using SHIFT+0
	Dot display: 2 to 4096 H	H setting fixed using SHIFT+1
Sync	Time display: 0.00 to 999.999 ms	
	Dot display: 1 to 99 H	
Backp	Time display: 0.00 to 999.999 ms	
	Dot display: 1 to 8192 H	
VDstart , VDline	Time display: 0.00 to 999.999 ms	
	Dot display: 0 to 8190 H	

<For interlaced scanning>

Setting it	tem	Setting range	Parameter fixing function
Field-1	Total1	Time display: 0.00 to 999.999 ms	Fixed to ms setting using SHIFT+2
		Dot display: 4.0 to 4096.0 H	Fixed to H setting using SHIFT+3
		(in 0.5H increments)	
	Disp1	Time display: 0.00 to 999.999 ms	Fixed to ms setting using SHIFT+0
		Dot display: 1 to 2048 H	Fixed to H setting using SHIFT+1
	Sync1	Time display: 0.00 to 999.999 ms	
		Dot display: 1.0 to 99.0 H	
		(in 0.5H increments)	
	Backp1	Time display: 0.00 to 999.999 ms	
		Dot display: 0.0 to 4096.0 H	
		(in 0.5H increments)	
	VDstart1		
		Dot display: 0.0 to 4095.0 H	
		(in 0.5H increments)	
	VDline1	Time display: 0.00 to 999.999 ms	
		Dot display: 0.0 to 4095.0 H	
First 0	T-4-10	(in 0.5H increments)	
Field-2	Total2		
	Disp2		
	Sync2	Same as Field-1	Same as Field-1
	Backp2	333 33 1 1012 1	
	VDstart2		
	VDline2		

^{*} When a parameter is fixed, it is accompanied by an asterisk (*). Even when values other than ones for parameters with an asterisk have been changed, the values of the parameters with the asterisks remain fixed.

Example: When an ms setting has been fixed using SHIFT+2 for Total



An asterisk is displayed here when the value is fixed.



When the time display (ms) is set for the items, restrictions apply to these settings depending on the H-period and other timing data used for drawing.

The values for the blanking and frontp items are calculated automatically on the basis of the data presented above.

<For progressive scanning>

Item	Calculation formula	Setting range
Blanking	Blanking = Total - Disp	Time display: 0.00 to 999.999 ms Dot display: 2 to 8192 H
Frontp		Time display: 0.00 to 999.999 ms Dot display: 0 to 8192 H

<For interlaced scanning>

Item	Calculation formula	Setting range
Frontp1 (Frontp2)	' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' '	Time display: 0.00 to 999.999 ms Dot display: 0.0 to 4096.0 H
Blanking1 (Blanking2)		Time display: 0.00 to 999.999 ms Dot display: 2.0 to 4096.0 H

3.2.3 Vertical timing data setting procedure


Described below is the procedure used to set the parameters which can be changed with the vertical timing data.

(1)	Select Program Edit using SET Or AINC DEC	MENU Program Name TiminS (TIN OutPut (TIN Audio (TIN Pattern (PAT	Pro9ram Edit : ▶EIA1920x1030Pa60 1	
	Select Timing (TIM) using or , and then press .	H-TiminS V-TiminS	>>	
(3)	Select V-Timing using or or in and then press.	Scan (TV Mode (Total Disp	V-Timin9 (0/1): PH (0-3): Progressive (0-B): HDTV1080 : 16.667ms 1125H : 16.000ms 1080H	
	Select the items using or or or and then press.	Set the V-Timing parameters.		
		Input Mode	Select the input setting for the V-Timing parameters to ms: time [milliseconds] or H: number of lines [H].	
	Select the parameter using the number keys o/STATUS of to	Scan	Refer to "3.2.4 Concerning the scanning modes."	
	* In the case of interlaced scanning outputs, Total, Disp, Sync and BackP are set for both	TV Mode	As a general rule, do not change this setting. For further details, refer to "3.2.5 Concerning the TV modes."	
	Field1 and Field2.	Total	The Total number in the vertical direction is set here.	
		Disp	The Disp width in the vertical direction is set here.	
		Sync	The Sync width in the vertical direction is set here.	
		BackP	The BackP width in the vertical direction is set here.	
		Serration/EQP	Refer to "3.2.6 Concerning Serration and EQP."	
		VD	Set VDStart and VDline here. This parameter can be set only when the parallel board has been installed.	

3.2.4 Concerning the scanning modes

The table below lists the V-Timing scan settings as well as the operations for the scanning methods supported by the settings, imaging methods and action settings.

Scan mode	System	Pixel imaging	Scroll and other actions
Progressive	Progressive scanning	Different pixels are drawn on each line.	Operation is performed for each frame.
Interlace	Interlaced scanning	Different pixels are drawn in the first field and second field.	Operation is performed for each field.
Prog.Segmented Frame	Interlaced scanning	Different pixels are drawn in the first field and second field.	Operation is performed for each frame (2 fields).
Interlace (Sync)	Interlaced scanning	The same image is repeatedly drawn in the first field and second field.	Operation is performed for each field.

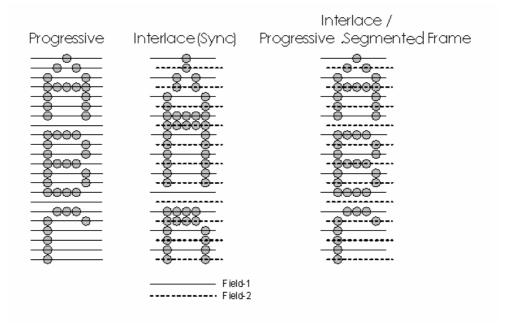

3.2.5 Concerning the TV modes

This parameter indicates the output of the TV standard signals (NTSC, NTSC-M, NTSC-443, PAL, PAL-M, PAL-60, PAL-N, PAL-Nc, SECAM, HDTV1080 or HDTV 720).

Even when this parameter is changed, the timing data and other data will not be edited. For this reason, when it is changed, it will no longer be possible for the images to be drawn correctly on the monitor.

* When editing the sample timing data using a TV Mode setting which is not 'Other,' select 'Other' as the TV mode setting. In this case, however, the tri-level sync signal will not be output.

3.2.6 Concerning Serration and EQP


Serration and EQP can be selected on the V-Timing [MENU] screen, and various parameters can be set. The correspondences between the settings and operations are described using the table below.



Serration and EQP setting procedure

Setting item	Key	LCD display	Description
Serration 0 OFF Serrated pulses are		OFF	Serrated pulses are not inserted.
	1	0.5H	Serrated pulses are inserted in increments of 0.5H.
2 1H Serrated pulses are in		1H	Serrated pulses are inserted in increments of 1H.
	3	EXOR	HS and VS EXORs are inserted as serrated pulses.
EQP	0	OFF	Equalizing pulses are not inserted into the EQPfp and EQPbp periods.
	1	ON	Equalizing pulses are inserted into the EQPfp and EQPbp periods.

Shown below as an example is the phase relationship when a setting of 0.5H has been selected for Serration.

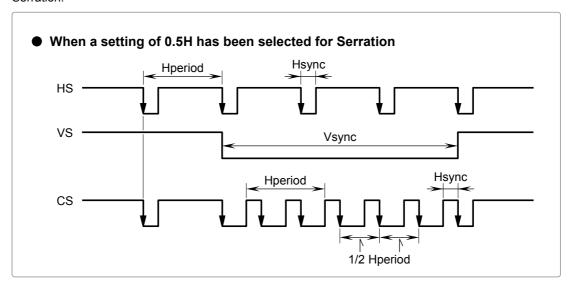




- The serration and EQP item settings are not reflected in the composite, Y/C and SCART signals.
- In the case of HDTV timing data, they are set to OFF when EXOR is selected as the serration setting item.

3.2.7 Concerning EQP-Fp and EQP-Bp

Equalizing pulses (EQP-Fp and EQP-Bp) can be selected on the V-Timing [MENU] screen, and various parameters can be set. The correspondences between the settings and operations are described using the table below.



EQP-Fp/EQP-Bp setting procedure

<For progressive scanning>


Setting item	Details of setting	
EQPfp	This sets the equalizing pulse inside the front porch. Setting range: 0.000 to 999.999 [ms], 0 to 99 [H]	
EQPbp	This sets the equalizing pulse inside the back porch. Setting range: 0.000 to 999.999 [ms], 0 to 99 [H]	

<For interlaced scanning>


Setting item	Details of setting
EQP-Fp1	This sets the equalizing pulse inside the front porch.
(EQP-Fp2)	Setting range: 0.000 to 999.999 [ms], 0.0 to 99.0 [H] (in 0.5H increments)
EQP-Bp1	This sets the equalizing pulse inside the back porch.
(EQP-Bp2)	Setting range: 0.000 to 999.999 [ms], 0.0 to 99.0 [H] (in 0.5H increments)



 Set EQP-Fp 1 within the range of [(EQP-Fp +1H) ≤ Hfrontp] for tri-level sync signal outputs in the interlaced scanning mode. The figure below shows the EQP phase relationship and approach taken.

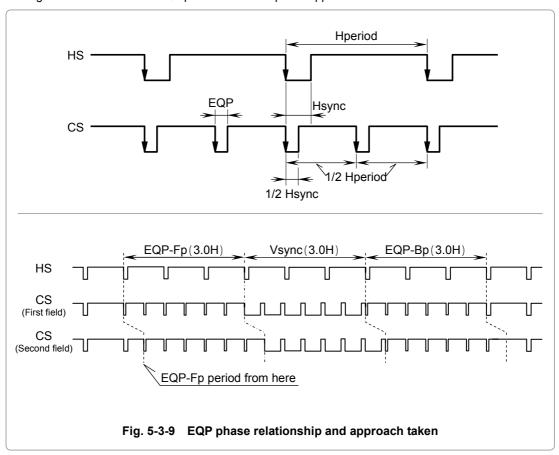


Example: Four examples of the EQP-Fp, EQP-Bp, EQP and Serration settings are shown below.




<Setting example 1>

Setting item	Setting
EQP-Fp	0H
EQP-Bp	0H
EQP	OFF
Serration	OFF



<Setting example 2>

Setting
0H
0H
OFF
0.5H



<Setting example 3>

Setting item	Setting
EQP-Fp	3H
EQP-Bp	3H
EQP	ON
Serration	1H



<Setting example 4>

Setting item	Setting
EQP-Fp	3H
EQP-Bp	0H
EQP	OFF
Serration	OFF





INTERFACE SETTINGS

4.1 Output settings


The following items are set as settings common to multiple video and audio output interfaces.


- · Output interface on/off setting
- · Sync signal on/off and polarity setting
- · Level mode setting
- · Aspect ratio setting
- · Pattern drawing bit length (gray scale) setting
- · RGB/YPbPr selection and color difference coefficient setting
- Analog level setting (temporary settings)
- Digital level setting (temporary settings)
- · Audio sweep setting
- Audio level setting (temporary settings)

4.1.1 Setting the output interfaces to ON or OFF


"Output" (ON) or "not output" (OFF) can be selected for each output interface whether video or audio interface. It is set to ON for the internal sample timing data unless the ratings or specifications of the generator prevent this.

Example: In the case of EIA 1920 × 1080i@59.94, the COMPOSITE and Y/C signals are set to OFF, but the HDMI and analog component signals are set to ON.

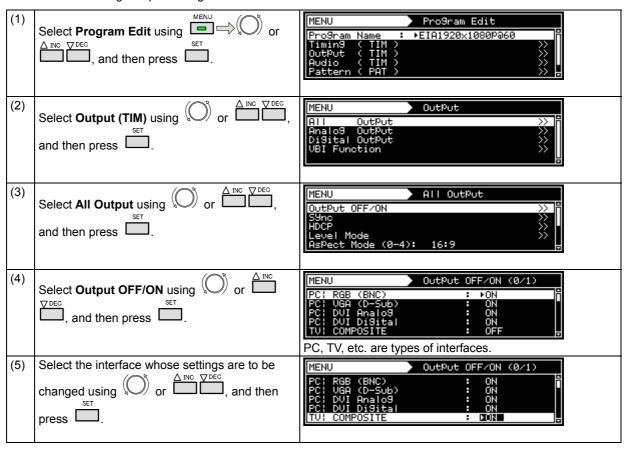




<How to check the interfaces whose signals are output>

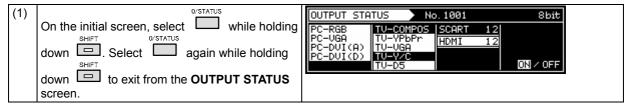

4.1.2 Setting the sync signals to ON or OFF and setting the sync signal polarities

In this section, the sync signals are set to ON or OFF and the sync signal polarities are set for each output connector.

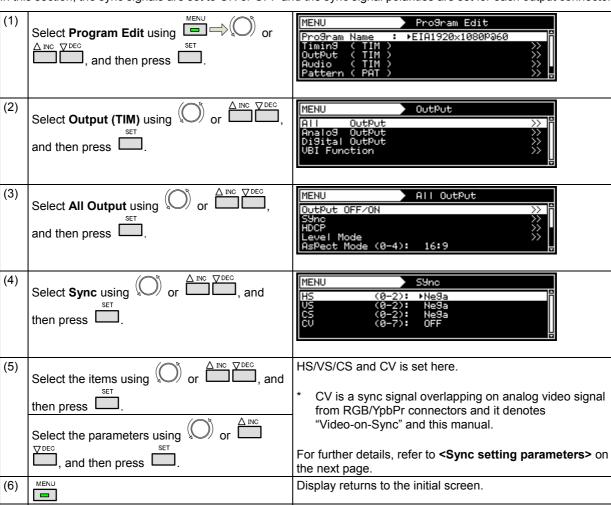

<Sync setting parameters>

HS Used to set the HS connector output.							
	0	Off	No output				
	1	Nega	The signal is output with a negative polarity.				
	2	Posi	The signal is output with a positive polarity.				
VS	Us	ed to s	et the VS connector output.				
	0	Off	No output				
	1	Nega	The signal is output with a negative polarity.				
	2	Posi	The signal is output with a positive polarity.				
CS	Us	ed to s	et the CS connector output.				
0 Off No output							
	1	Nega					
	2	Posi	The signal is output with a positive polarity.				
CV	CV Used to set whether to superimpose Video-on-Sync onto the analog component signals.						
0 Off Video-on-Sync is not superimposed.			Video-on-Sync is not superimposed.				
	1 R Video-on-Sync is superimposed onto the R analog component signal.						
	2 G Video-on-Sync is superimposed onto the G analog component signal.						
	3	RG Video-on-Sync is superimposed onto the RG analog component signal.					
	4	В	Video-on-Sync is superimposed onto the B analog component signal.				
	5	RB	Video-on-Sync is superimposed onto the RB analog component signal.				
	6	GB	Video-on-Sync is superimposed onto the GB analog component signal.				
	7	RGB	Wideo-on-Sync is superimposed onto the RGB analog component signal.				




 If the CS signal is a tri-level sync (HDTV timing) signals, its polarity cannot be changed.

4.1.3 Setting the level mode

Images can be output in the "limited" range of the HDMI standard. The output image range can be set for each unit.

The same level setting can also be established using an interface which is not HDMI (such as DVI, LVDS, parallel or analog).

* With the analog interface, the gray scale of the video parts will change, but neither the pedestal level nor peak level will change from when the "full" range applies.

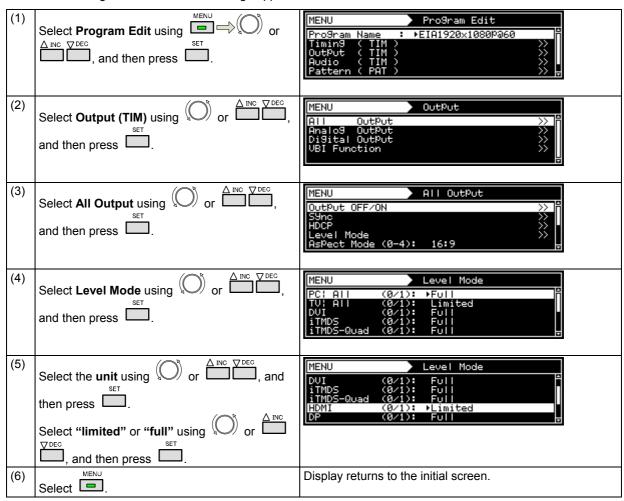

Video range when "full" is selected

	8 BIT	10BIT	12BIT	16BIT
R/G/B/Y/Cb/Cr	0-255	0-1023	0-4095	0-65535

Video range when "Limited" is selected

	8BIT	10BIT	12BIT	16BIT
R/G/B/Y	16-235	64-940	256-3760	4096-60160
Cb/Cr	16-240	64-960	256-3840	4096-61440

4.1.4 Setting the aspect ratio

In this section, the aspect ratio of the video signals is set.

(1)	Select Program Edit using SET or and then press .	Pi T O A	ENU rogram Name iming (TIM) utPut (TIM) udio (TIM) attern (PAT)	Program Edit ►EIA1920×1080Pa60 >>> >>> >>> >>> >>> >>> >>> >>> >>>
(2)	Select Output (TIM) using or or or and then press.	9 9 0	ENU OutPut nalo9 OutPut i9ita OutPut BI Function	OutPut
(3)	Select All Output using or or or and then press.		ENU utPut OFF/ON Ync DCP evel Mode sPect Mode (0-4	All OutPut >>> >>> >>> >>> >>> >>> >>> >>> >>>
(4)	Select Aspect Mode using or or or and then press.	SYLL	ENU Ync DCP evel Mode spect Mode (0-4 ser Aspect	All OutPut
(5)	<pre><inputting parameters="" the=""></inputting></pre>	Se	t the aspect ration	D.
	Select the parameters using or or or	0	4:3	The aspect ratio is set to 4:3.
	Select the parameters using \$\infty\$ of \topsion \text{SET}	1	4:3 Letter Box	The aspect ratio is set to 4:3 letter box.
	, and then press .	2	16:9	The aspect ratio is set to 16:9.
	Alternatively: Select the parameters using the number keys	3	Resolution	The aspect ratio is set to the same ratio as the screen resolution.
	(to to), and then press .	4	User	The aspect ratio of the user's choice is set.
		*	The 4:3 letter b timing signals.	ox setting takes effect only with SDTV
(6)	If User was set in step (5), users can set the aspect ratio of their choice. Select UserAspect using or	S: HI L: A:	ENU Hnc DCP evel Mode spect Mode (0-4 ser Aspect	All OutPut >>>

(7)	<inputting parameters="" the=""></inputting>	Set the aspect ratio.	
	Select the parameters using \bigcirc or \bigcirc or \bigcirc	Н	The aspect ratio is set in the horizontal direction. Setting range: 0 to 255
	\Box , and then press \Box .	٧	The aspect ratio is set in the vertical direction. Setting range: 0 to 255
	Select the numerical value using or		
	, and then press.		
	Alternatively:		
	Select the parameters using the number keys		
	(to to), and then press .		

* Although images are normally output with the 4:3 aspect ratio, the images which are output when 4:3 letter box has been selected will be in the 16:9 aspect ratio. For this reason, the top and bottom of the images are filled in with black and output.

When 4:3 letter box has been selected as the aspect ratio, the images output will appear as shown below.

4: Normal output 3: Normal output 9: When letter box is selected

16: When letter box is selected


4.1.5 Setting the bit length (gray scale) for pattern drawing

The bit length (gray scale) applying when drawing test patterns can be set.

It can either be set either separately for each program or it can be fixed irrespective of the programs.


- a) The same specific bit length is designated.
- b) The bit length is set for each program.


a) Designating the same specific bit length

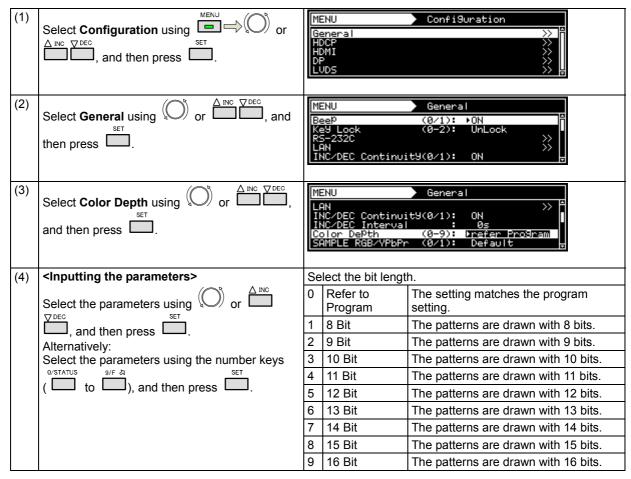


b) Setting the bit length for each program

This setting takes effect when "Refer to Program" has been selected for the setting in (3) of "Designating the same specific bit length" in a) above.

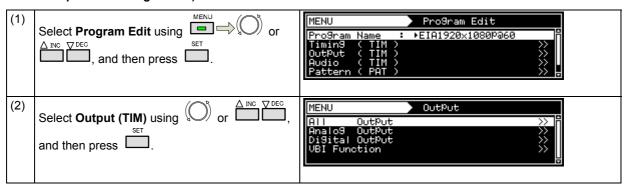

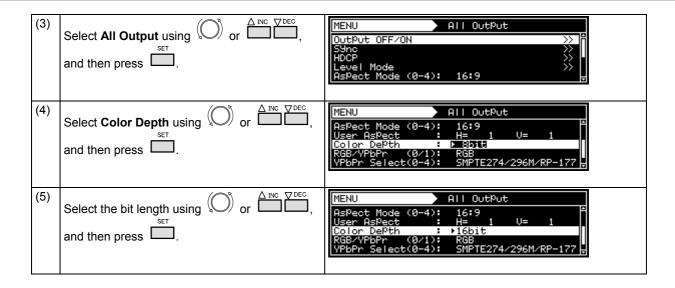


4.1.6 Selecting RGB or YPbPr and setting the color difference coefficients

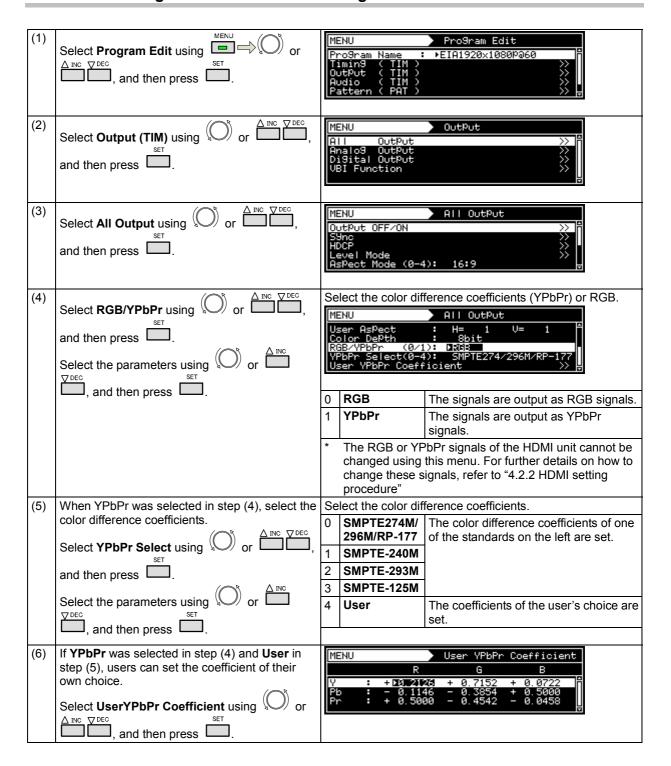

(7)	Select the color matrix coefficients. Select the parameters using or	 Caution for setting the coefficients The Y line must total 1.0000. The sum of the coefficient for Pb and Pr respectively must be 0.
(8)	Select .	Display returns to the initial screen.

4.1.7 Setting the analog level (temporary settings)

In this section, the video level of the analog component signals is set. The video signal gray scale remains unchanged, and only the level is changed.

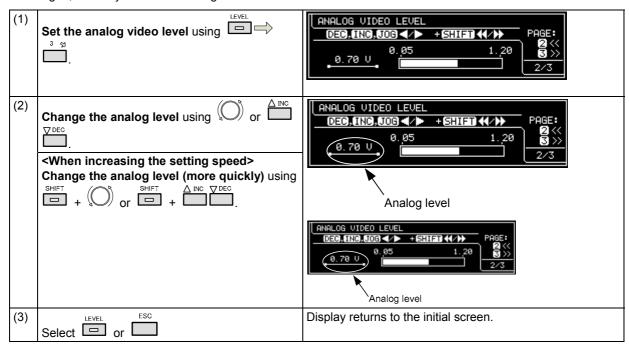

Analog video level range

When Video-on-Sync is not superimposed	When Video-on-Sync is superimposed
0.05 V to 1.2 V	0.3 V to 1.2 V

For the Video-on-Sync setting, refer to "4.1.2 Setting the sync signals to ON or OFF and setting the sync signal polarities."




- The values set here are not saved as program data.
- They take effect only with the component output signals of the PC analog unit.

4.1.8 Setting the digital level (temporary settings)

In this section, the gray scale of the video signals is set.

For further details on setting the gray scale, refer to "4.1.5 Setting the bit length (gray scale) for pattern drawing."

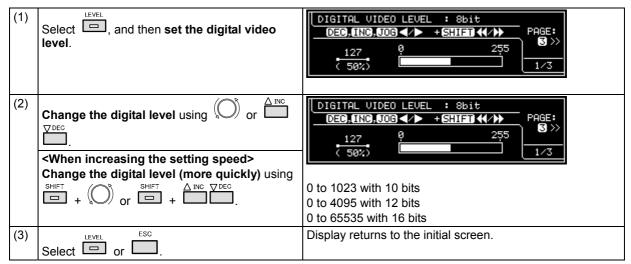




The values set here are not saved as program data.

4.1.9 Audio sweep settings

The audio output frequency can be raised or lowered at the set interval.

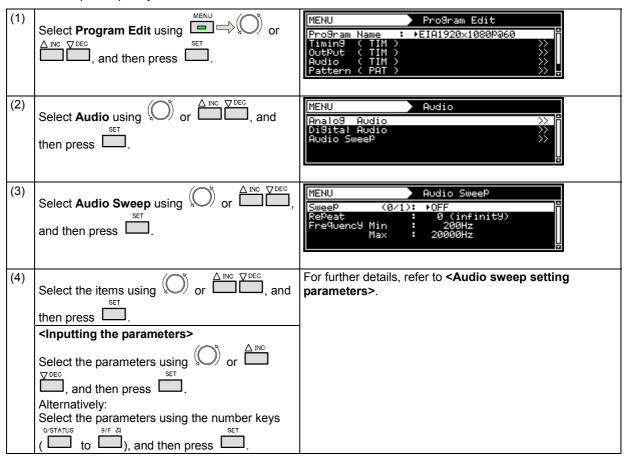

<Audio sweep setting parameters>

(1)	Sweep (0/1)	Used to enable or disable the sweep function.		
		0	OFF	Disable
		1	ON	Enable
(2)	Repeat (0-15)	Used to set the number of repeats.		
		0	Infinity	Repeated indefinitely.
		1-15		Repeated for the set number of times only.
(3)	Frequency Min	Used to set the minimum frequency.		
		Setting range: 200 Hz to 20000 Hz		
(4)	Frequency Max	Used to set the maximum frequency.		
		Setting range: 200 Hz to 20000 Hz		




When using the function with HDMI, select Internal PCM as the Digital Audio
 Source setting.

4.1.10 Setting the audio level (temporary settings)

In this section, the audio output level is set.

The level which was set in "4.15.2 Analog audio signals" for analog audio or which was set using <Internal PCM setting parameters> in "4.2.5 Embedded audio, high bit rate audio (option)" for HDMI is 0 dB.

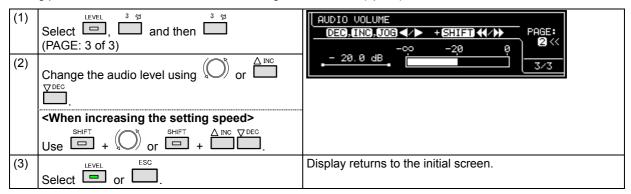




- The values set here are not saved as program data.
- When they are used with HDMI, select Internal PCM as the Digital Audio > Source setting.

4.2 HDMI

4.2.1 Connectors and pin assignments

■ HDMI




Pin no.	Signal
1	TMDS DATA2+
2	TMDS DATA2 SHIELD
3	TMDS DATA2-
4	TMDS DATA1+
5	TMDS DATA1 SHIELD
6	TMDS DATA1-
7	TMDS DATA0+
8	TMDS DATA0 SHIELD
9	TMDS DATA0-
10	TMDS CLK+
11	TMDS CLK SHIELD
12	TMDS CLK-
13	CEC
14	RESERVE
15	DDC CLK
16	DDC DATA
17	GROUND (for +5 V)
18	+5 V (DDC power supply *1)
19	HOT PLUG DETECT
Shell	FG

^{*1:} Restrictions apply to the supply current of the DDC power supply. Refer to "12.3 Concerning the maximum current consumption of the DDC (DP_PWR) power supply."


■ I2S (Option)

Connector: 7614-5002PL (made by 3M)



Pin no.	Signal	Description
1	MCLK IN	Input a clock signal with a frequency of 24.576 MHz or 22.5792 MHz.
2	GND	
3	SCLK IN	Input the I2S SCLK signal.
4	GND	
5	LRCLK IN	Input the I2S LRCLK signal.
6	GND	
7	SD0 IN	Input the I2S SD0 signal.
8	GND	
9	SD1 IN	Input the I2S SD1 signal.
10	GND	
11	SD2 IN	Input the I2S SD2 signal.
12	GND	
13	SD3 IN	Input the I2S SD3 signal.
14	GND	

Input the signals at the following timing.

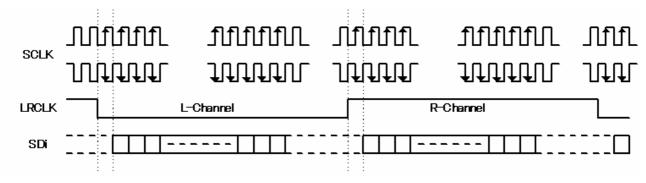

^{*} For the SCLK and LRCLK signals, input signals which are synchronized with MCLK. The leading edge of SCLK can be set using "4.2.5 Embedded audio, high bit rate audio (option)."

4.2.2 HDMI setting procedure

(1)	Select Program Edit using SET or and then press .	Pro9ram Edit
(2)	Select Output (TIM) using or or or or or and then press.	MENU OutPut All OutPut Analog OutPut Digital OutPut VBI Function OutPut OutPut
(3)	Select Digital Output using or	MENU Digital OutPut DVI
(4)	Select HDMI using or or discovered, and then press.	MENU HDMI OutPut 1ch (0/1): ▶ON 2ch (0/1): ON HDMI or DVI (0-2): HDMI Video Format(0-2): YCbCr4:4:4 Width (0-3): Auto
(5)	Select the items using or or or , and then press .	For further details on the parameters, refer to <hdmi b="" unit<=""> setting parameters> on the next page.</hdmi>
	Select the parameters using or □ or	

<HDMI unit setting parameters>

(1)	Output dala (0/4)	Set on or off for each channel here.						
(1)	Output 1ch (0/1) Output 2ch (0/1)	The same settings as the ones described in "4.1.1 Setting the output						
	Output Zeii (0/1)	interfa	ces to ON or C	OFF" can also be established.				
		0	Off	No signal output				
		1	On	Signal output				
(2)	HDMI or DVI (0-2)	An HD	MI connection	can be made to DVI by cable conversion.				
		Set the	e operations at	t this time here.				
		0	HDMI	The full functions of HDMI can be used.				
		1	DVI	This setting differs from HDMI in the following				
				ways.				
				Info Frame and Packet are not sent.				
				Audio is not supported.				
				Up to 8 bits are supported. Deep Color is not supported.				
		2	Auto	EDID of the connected monitor is checked, and the DVI and HDMI modes are set.				
(3)	Video Format (0-2)	The co		ne images output from HDMI is set here.				
		0	RGB	The images are output using RGB signals.				
		1	YCbCr4:2:2	The images are output using YCbCr4:2:2 signals.				
		2	YCbCr4:4:4	The images are output using YCbCr4:4:4 signals.				
(4)	Width (0-3)	The bit length of the images output from HDMI is set here. A setting independent of the bit length for pattern drawing can be selected or the same bit length can be selected automatically. * The portion by which the bit length for pattern drawing exceeds the bit length which has been set here is discarded. A deficient portion is filled with zeros.						
				ng the bit length (gray scale) for pattern drawing."				
		0 Auto 8, 10 or 12 bits are selected here autom depending on the bit length for pattern depending on the bit length for patter						
		1	8 bit	8-bit output				
		2	10 bit	10-bit output				
		3	12 bit	12-bit output				
(5)	Audio Output (0/1)	The er	mbedded audio	o output is set here.				
			r the embedde th bit rate audi	ed audio settings, refer to "4.2.5 Embedded audio, o (option)."				
		0 Off No embedded audio output						
		1	On Embedded audio output					
(6)	Audio N (0/1)	Set the Audio N parameter.						
		* This setting is an license option (CTS option). If the unit does not						
		have t	he license, it is	s fixed to "Auto".				
		0	Auto	Set the appropriate value.				
		1	Manual	Set the N number that is calcurated by				
			128xfs	N= 128 x Sampling frequency / A.				
<u></u> :	1.6.5.	A setting range : 300-1500						
(7)	InfoFrame	other	settings, refer t	rame automatically in line with the color space and to "4.2.3 InfoFrame/Packet"				
			sending InfoFi InfoFrame/Pa	rame with the data of the user's choice, refer to acket"				

4.2.3 InfoFrame/Packet


InfoFrame can send the values which are optimal for the video and audio output conditions.

In addition, it is possible to send InfoFrame using values differing from the output conditions to reproduce illegal operation conditions.

Use one of the following operations to send InfoFrame:

- a) Send the optimal values automatically.
- b) Set separate InfoFrame values, and send them.

a) Sending the optimal values automatically

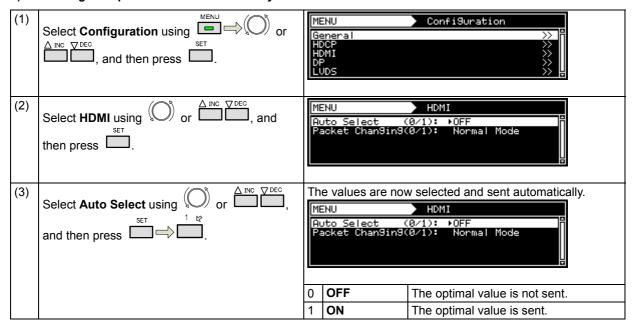

<List of automatically selected items>

- If program data has been saved when Auto Select is set to ON, the values which were set by automatic selection will be saved.
- A dash ("-") denotes that the value of the original setting is used.

Item	Setting/reference section	n							
AVI InfoFrame	Gottanig/Toronomics Goodle								
7.0.10	AFD pattern (see "6.7 A now displayed	spect ratio patterns")		ner than the on the left					
Active Format Information	Valid		-						
Active Format Aspect	The setting accords with	the AFD > Type setti	na.						
Top Bar	Value calculated from A	-							
Bottom Bar									
Left Bar									
Right Bar									
RGB or YCbCr	The setting accords with	the HDMI > Video F	ormat setting.						
Picture Aspect		The setting accords with the HDMI > AVI InfoFrame > Video Code setting. (EIA/CEA-861 standard met)							
Repetition	The setting accords with	the H-Timing > Repe	etition setting.						
Audio InfoFrame									
	The setting accords with	the Digital Audio > S	ource setting.						
	Ext.ANALOG to L-PCM Int.L-PCM Ext.I2S L-PCM	Int.DSD (Option)	Setting other than the one given on the left						
O " F	(Option)	 44.1 kHz	<u> </u>						
Sampling Frequency	-	The DSD File informatio n is used.	-						
Channel Count	The setting accords with by Digital Audio > Outpu	ut Channel.	to 8	-					
	Refer StreamHe	eader 2ch 2	to 8ch						
ACP Packet				•					
	The setting accords with	the ACP Packet > AC	CP_Type settir	ng.					
	DVD-Audio			ner than the on the left					
DVD-Audio_Type	1		0						
Copy_Permission	-		0 (Copy F	reely)					
Copy_Number	-		0 (1 copie	es)					
Quality	-		0						
Transaction	-		0 (Not Pr	esent)					
ISRC Packet	"								
	A The setting accords w	ith the ACP Packet > .	ACP_Type set	ting.					
	DVD-Audio			ner than the on the left					
OFF/ON ISRC1	-		OFF						
ISRC2	The setting accords with ISRC_Cont setting. 0 OFF	the ISRC Packet >	OFF						


b) Setting separate InfoFrame and Packet values and sending them

This setting can be performed when "off" has been selected for Auto Select in a) Sending the optimal values automatically.

(1)	Select Program Edit using SET or and then press .	MENU
(2)	Select Output (TIM) using or or or or and then press.	MENU OutPut >>
(3)	Select Digital Output using or	MENU DiSital OutPut DVI
(4)	Select HDMI using or or or then press.	MENU HDMI OutPut 1ch (0/1): ▶ON 2ch (0/1): ON HDMI or DVI (0-2): HDMI Video Format(0-2): YCbCr4:4:4 Width (0-3): Auto
(5)	Select the Info Frame and Packet to be set. Select Info Frame/Packet using or	MENU InfoFrame/Packet Vendor SPecific InfoFrame >>> AVI InfoFrame >>> SPD InfoFrame >>> Audio InfoFrame >>> MPEG InfoFrame >>>
(6)	Select the parameters using or	Example: When AVI-Info Frame is selected MENU

<Setting the HDMI output when making changes to InfoFrame/Packet>

When making changes to InfoFrame/Packet, users can select either to turn off the synchronization of the HDMI output and establish the settings or change only the packets without turning off the synchronization.

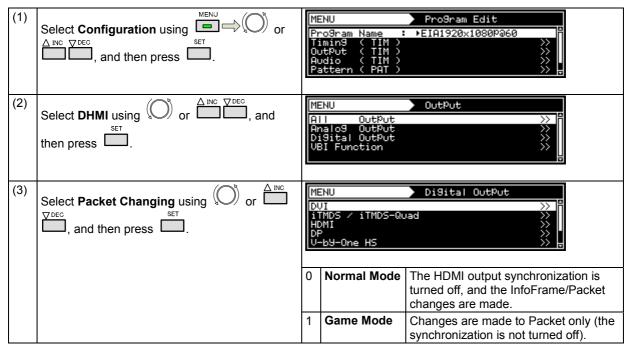

<InfoFrame and Packet setting parameters>

Listed below are the 9 InfoFrame and Packet setting parameters.

- · Vendor Specific
- AVI InfoFrame
- · SPD InfoFrame
- · Audio InfoFrame
- MPEG InfoFrame
- · NTSC VBI InfoFrame
- ACP Packet
- ISRC Packet
- Gamut Metadata Packet

■ Vendor Specific InfoFrame

The vendor specific information is stored in Vendor Specific InfoFrame, and sent.

(1)	OFF/ON	Th	This setting determines whether Vendor Specific InfoFrame is to be sent.						
		0	OFF	The Vendor Specific InfoFrame is not sent.					
		1	ON	The Vendor Specific InfoFrame is sent.					
Listed b	pelow are the Vendor Specific	Info	oFrame settings.						
	1	e not related to the video and audio output settings.							
(2)	Туре	Th	is is the Vendor Specific I						
		1		only. It cannot be changed.					
(3)	Version	_	This is the Vendor Specific InfoFrame version setting.						
(1)		1		d only. It cannot be changed.					
(4)	IEEE RegID Sel	Th it.	This selects the format setting for the IEEE Registration ID and the items after it.						
		0	Other	Any IEEE Registration ID can be selected. The Payload is set after the IEEE Registration ID.					
		1	HDMI	The IEEE Registration ID is set to 000C03. After the IEEE Registration ID, the setting is established using the format that supports HDM 1.4.					
1. IEEE	IEEE RegID Sel: Other								
1-(1)	IEEE Regist. ID		is is the IEEE Registratio	n ID setting.					
		000000 - FFFFFF							
1-(2)	Payload Length		is is the Payload length s	etting.					
		0 - 23							
1-(3)	Payload 1-23	This is the Payload data setting.							
2 1555	DoalD Col. HDMI	00 - FF							
2-(1)	RegID Sel: HDMI IEEE Regist. ID	Th	is indicates the IEEE Dec	vistration ID (It cannot be changed)					
2-(1)	ILLE Negist. ID	This indicates the IEEE Registration ID. (It cannot be changed.) 000C03							
2-(2)	Video Format		is is the HDMI Video Forr	mat setting					
2 (2)	Vidoo i oiliidt	0	None	No additional HDMI video format is presented in					
				this packet.					
		1	Ext. Resolution	Extended resolution format present.					
		2	3D	3D format indication present.					
			(Option)	* '3D' is an option. The Vendor Specific InfoFrame information is not sent unless the license has been registered. For further details, contact your dealer or an ASTRODESIGN sales representative.					
2-1. Vid	leo Format: Ext. Resolution								
2-1-(1)	HDMI VIC	Th	is is the HDMI VIC setting	g.					
		0	4K×2K 29.97/30 Hz						
		1	4K×2K 25 Hz						
		2	4K×2K 23.98/24 Hz						
		3	4K×2K 24 Hz (SMPTE)						

2-2 VID	EO FORMAT: 3D (OPTION))								
	3D STRUCTURE		THIS IS THE 3D STRUCTURE SETTING.							
(.,		0	FRAME PACKING							
		1	FIELD ALTERNATIVE							
		2	LINE ALTERNATIVE							
		3	SIDE-BY-SIDE (FULL)							
		4	L + DEPTH							
				EPTH + GRAPHICS + GRAPHICS-DEPTH)						
			SIDE-BY-SIDE (HALF)							
2-2-(2)	3D EXT DATA		IIS IS THE 3D EXT DATA SETTING.							
()		0	HORIZONTAL HORIZONTAL SUB-SAMPLING							
			O/L,O/R	ODD/LEFT PICTURE, ODD/RIGHT PICTURE						
		1	HORIZONTAL O/L,E/R	HORIZONTAL SUB-SAMPLING						
			ODD/LEFT PICTURE, EVEN/RIGHT PICTURE							
		2	HORIZONTAL E/L,O/R HORIZONTAL SUB-SAMPLING EVEN/LEFT							
			PICTURE, ODD/RIGHT PICTURE							
		3	HORIZONTAL E/L,E/R HORIZONTAL SUB-SAMPLING							
		_		EVEN/LEFT PICTURE, EVEN/RIGHT PICTURE						
		4	QUINCUNX O/L,O/R	QUINCUNX MATRIX ODD/LEFT PICTURE, ODD/RIGHT PICTURE						
		5	QUINCUNX O/L,E/R QUINCUNX MATRIX							
		5	QUINCUNX MATRIX ODD/LEFT PICTURE, EVEN/RIGHT PICTURE							
		6	QUINCUNX E/L,O/R QUINCUNX MATRIX							
			QUINTOUNX E/E,O/IX	EVEN/LEFT PICTURE, ODD/RIGHT PICTURE						
		7	QUINCUNX E/L,E/R	QUINCUNX MATRIX						
			EVEN/LEFT PICTURE, EVEN/RIGHT PICTURE							
2-2-(3)	3DMETA PRESENT	THIS IS THE 3D META PRESENT (WHETHER THE FOLLOWING 3D								
			METADATA IS PRESENT OR NOT) SETTING.							
			0 (NOT PRESENT)	3D METADATA NOT PRESENT						
		1	1	3D METADATA PRESENT						
2-2-(4)	METADATA TYPE	THIS INDICATES THE 3D METADATA TYPE. (IT CANNOT BE CHANGED.)								
		0								
2-2-(5)	METADATA LENGTH		IIS IS THE 3D METADAT	A LENGTH SETTING.						
			19							
2-2-(6)	METADATA 1-19		IIS IS THE 3D METADATA	A DATA SETTING.						
		00	- FF							

AVI InfoFrame

"AVI InfoFrame" stands for Auxiliary Video Information InfoFrame. The information (including the color space and aspect ratio) of the transmission images is stored in it, and sent.

O OFF The AVI InfoFrame is not sent.	(1)	OFF/ON	Th	This setting determines whether the AVI InfoFrame is to be sent.						
Listed below are the AVI InfoFrame settings. * These settings are not related to the video and audio output settings. (2) Type This is the AVI InfoFrame type setting. 2 * "Type" is displayed only. It cannot be changed. This is the AVI InfoFrame version setting. 1 Version 1 2 Version 2 (4) Scan Info This sets the Scan Information. (It sets whether processing is required for the transmitted images.) 0 No Data No Data 1 Overscanned Composed for an overscanned display. 2 Underscanned Composed for an underscanned display. (5) Bar Info This sets the Bar Info (valid/invalid for the Bar Information described later). 0 Data Not Valid Bar Data not valid 1 Vertical Valid Vert.Bar info valid 2 Horizontal Valid Horiz.Bar info Valid 3 Vert. & Horiz. Valid Vert. And Horiz. Bar Info valid (6) ActiveF Info This is the Active Format Information Present setting (valid/invalid for the Active Format Aspect Ratio described later). 0 No Data No Data 1 Valid Active Format Information Valid (7) RGB or YCbCr This is the RGB or YCbCr (color space of transmitted images) setting. 0 RGB 1 YCbCr 4:2:2 2 YCbCr 4:4:4 (8) AvtiveF Aspect This is the Active Format Aspect Ratio (aspect ratio of the video parts (excluding Bar of letter box, etc.)) setting. 0 Same Picture			0							
* These settings are not related to the video and audio output settings. Type			1	ON	The AVI InfoFrame is sent.					
This is the AVI InfoFrame type setting. 2 * "Type" is displayed only. It cannot be changed.	Listed	below are the AVI InfoFrame s	setti	ngs.						
2 * "Type" is displayed only. It cannot be changed. This is the AVI InfoFrame version setting. Version 1 Version 2 Version 2	* The	ese settings are not related to			•					
This is the AVI InfoFrame version setting. 1 Version 1 2 Version 2	(2)	Туре	Th							
1 Version 1 2 Version 2			2	1 1 1 1 1						
2 Version 2 This sets the Scan Information. ((It sets whether processing is required for the transmitted images.) 0 No Data No Data 1 Overscanned Composed for an overscanned display. 2 Underscanned Composed for an underscanned display. 2 Underscanned Composed for an underscanned display. 3 Vertical Valid Bar Data not valid 1 Vertical Valid Vert.Bar info valid 2 Horizontal Valid Horiz.Bar info Valid 3 Vert. & Horiz. Valid Vert. And Horiz. Bar Info valid 3 Vert. & Horiz. Valid Vert. And Horiz. Bar Info valid This is the Active Format Information Present setting (valid/invalid for the Active Format Aspect Ratio described later). 0 No Data No Data No Data Valid Active Format Information Valid This is the RGB or YCbCr (color space of transmitted images) setting. 0 RGB 1 YCbCr 4:2:2 2 YCbCr 4:4:4 (8) AvtiveF Aspect This is the Active Format Aspect Ratio (aspect ratio of the video parts (excluding Bar of letter box, etc.)) setting. 0 Same Picture	(3)	Version	Th	Ţ.						
(4) Scan Info This sets the Scan Information. (It sets whether processing is required for the transmitted images.) 0 No Data 1 Overscanned Composed for an overscanned display. 2 Underscanned Composed for an underscanned display. (5) Bar Info This sets the Bar Info (valid/invalid for the Bar Information described later). 0 Data Not Valid Bar Data not valid 1 Vertical Valid Vert. Bar info Valid 2 Horizontal Valid Horiz. Bar info Valid 3 Vert. & Horiz. Valid Vert. And Horiz. Bar Info valid This is the Active Format Information Present setting (valid/invalid for the Active Format Aspect Ratio described later). 0 No Data No Data 1 Valid Active Format Information Valid (7) RGB or YCbCr This is the RGB or YCbCr (color space of transmitted images) setting. 0 RGB 1 YCbCr 4:2:2 2 YCbCr 4:4:4 (8) AvtiveF Aspect This is the Active Format Aspect Ratio (aspect ratio of the video parts (excluding Bar of letter box, etc.)) setting. 0 Same Picture			1 Version 1 2 Version 2							
(It sets whether processing is required for the transmitted images.) O No Data No Data			2	2 Version 2						
O No Data	(4)	Scan Info								
1 Overscanned Composed for an overscanned display.			(It							
2 Underscanned Composed for an underscanned display.			0	No Data	No Data					
This sets the Bar Info (valid/invalid for the Bar Information described later). Data Not Valid Bar Data not valid			1	Overscanned	Composed for an overscanned display.					
O Data Not Valid Bar Data not valid			2	Underscanned	Composed for an underscanned display.					
1 Vertical Valid Vert.Bar info valid 2 Horizontal Valid Horiz.Bar info Valid 3 Vert. & Horiz. Valid Vert. And Horiz. Bar Info valid (6) ActiveF Info This is the Active Format Information Present setting (valid/invalid for the Active Format Aspect Ratio described later). 0 No Data No Data 1 Valid Active Format Information Valid (7) RGB or YCbCr This is the RGB or YCbCr (color space of transmitted images) setting. 0 RGB 1 YCbCr 4:2:2 2 YCbCr 4:4:4 (8) AvtiveF Aspect This is the Active Format Aspect Ratio (aspect ratio of the video parts (excluding Bar of letter box, etc.)) setting. 0 Same Picture	(5)	Bar Info	Th							
2 Horizontal Valid Horiz.Bar info Valid 3 Vert. & Horiz. Valid Vert. And Horiz. Bar Info valid			0	Data Not Valid	Bar Data not valid					
3 Vert. & Horiz. Valid Vert. And Horiz. Bar Info valid			1	Vertical Valid	Vert.Bar info valid					
(6) ActiveF Info This is the Active Format Information Present setting (valid/invalid for the Active Format Aspect Ratio described later). 0 No Data 1 Valid Active Format Information Valid This is the RGB or YCbCr (color space of transmitted images) setting. 0 RGB 1 YCbCr 4:2:2 2 YCbCr 4:4:4 (8) AvtiveF Aspect This is the Active Format Aspect Ratio (aspect ratio of the video parts (excluding Bar of letter box, etc.)) setting. 0 Same Picture			2	Horizontal Valid	Horiz.Bar info Valid					
Active Format Aspect Ratio described later). 0 No Data 1 Valid Active Format Information Valid This is the RGB or YCbCr (color space of transmitted images) setting. 0 RGB 1 YCbCr 4:2:2 2 YCbCr 4:4:4 This is the Active Format Aspect Ratio (aspect ratio of the video parts (excluding Bar of letter box, etc.)) setting. 0 Same Picture			_							
1 Valid Active Format Information Valid	(6)	ActiveF Info	This is the Active Format Information Present setting (valid/invalid for the Active Format Aspect Ratio described later).							
(7) RGB or YCbCr This is the RGB or YCbCr (color space of transmitted images) setting. 0 RGB 1 YCbCr 4:2:2 2 YCbCr 4:4:4 (8) AvtiveF Aspect This is the Active Format Aspect Ratio (aspect ratio of the video parts (excluding Bar of letter box, etc.)) setting. 0 Same Picture			0	No Data	No Data					
0 RGB 1 YCbCr 4:2:2 2 YCbCr 4:4:4 (8) AvtiveF Aspect This is the Active Format Aspect Ratio (aspect ratio of the video parts (excluding Bar of letter box, etc.)) setting. 0 Same Picture			1	Valid	Active Format Information Valid					
1 YCbCr 4:2:2 2 YCbCr 4:4:4 (8) AvtiveF Aspect This is the Active Format Aspect Ratio (aspect ratio of the video parts (excluding Bar of letter box, etc.)) setting. 0 Same Picture	(7)	RGB or YCbCr	Th	is is the RGB or YCbCr (color space of transmitted images) setting.					
(8) AvtiveF Aspect This is the Active Format Aspect Ratio (aspect ratio of the video parts (excluding Bar of letter box, etc.)) setting. 0 Same Picture			0	RGB						
(8) AvtiveF Aspect This is the Active Format Aspect Ratio (aspect ratio of the video parts (excluding Bar of letter box, etc.)) setting. 0 Same Picture			1	YCbCr 4:2:2						
(excluding Bar of letter box, etc.)) setting. 0 Same Picture			2	YCbCr 4:4:4						
0 Same Picture	(8)	AvtiveF Aspect	Th	is is the Active Format As	spect Ratio (aspect ratio of the video parts					
			(ex		etc.)) setting.					
1 4:3 (contor)			0	Same Picture						
1 4.5 (center)			1	4:3 (center)						
2 16:9 (center)			2	16:9 (center)						
3 14:9 (center)			3	14:9 (center)						
4 Box 16:9 (top)			4	Box 16:9 (top)						
5 Box 14:9 (top)			5	Box 14:9 (top)						
6 Box > 16:9 (center)			6	Box > 16:9 (center)						
7 4:3 (14:9 center)			7	4:3 (14:9 center)						
8 16:9 (14:9 center)			8	16:9 (14:9 center)						
9 16:9 (4:3 center)			9	16:9 (4:3 center)						

(9)	Picture Aspect				tatio (aspect ratio of the video parts including Bar			
				k, etc.) setting.	IN. D.G.			
			No Data 4:3	1	No Data 4:3			
			16:9		16:9			
(10)	Scaling		nis is the Non-Uniform Picture Scaling (direction in which transmit					
(10)	- County			e been scaled)				
		0	No Kno	wn	No Known non-uniform Scaling			
		1	Horizor	ntal	Picture has been scaled horizontally			
			Vertical		Picture has been scaled vertically			
			Horiz. 8		Picture has been scaled horizontally and vertically			
(11)	Colorimetry	This	his is the Colorimetry (the standard whose coefficients were used for proversion into color difference signals) setting.					
			1					
			SMPTE	SMPTE170M/ITU601				
			ITU601					
	2 ITU709				ITU709			
		3	3 Extended Valid Extended Colorimetry Information Val					
(12)	Video Code		nis is the Video Format Identification Code setting.					
		0 -	0 - 59 For further details on the timings indicated by Code, refer to CEA-861-D.					
(13)	Repetition	1 -	1 - 10 This is the Pixel Repetition Factor setting.					
(14)	Top Bar	0 -	65535	This is the Line bar size setting	Number of End of Top Bar setting (letter box top).			
(15)	Bottom Bar	0 -	This is the Line Number of Start of Bottom Bar setting (letter box bottom bar size setting).					
(16)	Left Bar	0 -	This is the Pixel Number of End of Left Bar setting (pillar box left bar size setting).					
(17)	Right Bar	0 -	- 65535 This is the Pixel Number of Start of Right Bar setting (pillar box right bar size setting).					
(18)	RGB Quan.Range		This is the RGB Quantization Range setting (quantization range when RGB images apply for Colorimetry).					
			ges app Default	•	у).			
		1 Limited Range 2 Full Range						
(19)	YCC Quan.Range		This is the YCC Quantization Range setting (quantization range when YCC					
(- /				ly for Colorimetr				
			Limited					
			Full Ra					
(20)	Extended Colo.	This is the Extended Colorimetry setting.						
			is is refe ting.)	erenced when Ex	xtended Valid has been set as the Colorimetry			
			XvYCC	601				
			XVYCC:					
			sYCC60					
			Adobe					
			Adobe					
	1	1 '						

(21)	IT content	This is the IT Content (whether the transmitted images are IT content) setting					
		0					
		1					
(22)	IT content Type	This is the IT Content Type setting.					
		0	Graphics				
		1	Photo				
		2	Cinema				
		3	Game				

■ SPD InfoFrame

"SPD InfoFrame" stands for Source Product Description InfoFrame. The information of the transmission device is stored in it, and sent.

(1)	OFF/ON	Th	is setting determines whe	ether the SPD InfoFrame is to be sent.					
		0	OFF	The SPD InfoFrame is not sent.					
		1	ON	The SPD InfoFrame is sent.					
	below are the SPD InfoFrame		•						
	ese settings are not related to		•	•					
(2)	Туре	-	is is the SPD InfoFrame t	•					
		3	Type is displayed only. It cannot be changed.						
(3)	Version	-	is is the SPD InfoFrame						
		1	Version1	"Version" is displayed only. It cannot be changed.					
(4)	Vendor Name	Th	his is the Vendor Name (name of the transmission device vendor) setting.						
		Ma	aximum 8 characters	For further details on the input method, refer to steps (2) and following in section "2.3 Setting the names"					
(5)	Product Description		This the Product Description (name of the transmission device (model etc.)) setting.						
		Ма	aximum 16 characters	For further details on the input method, refer to steps (2) and following in section "2.3 Setting the names"					
(6)	Source Device		This is the Source Device Information (the type of transmission device) setting.						
		0	Unknown						
		1	Digital STB						
		2	DVD Player						
		3	D-VHS						
		4	HDD Video recorder						
		5	DVC						
		6	DSC						
		7 Video CD							
		8 Game							
		9	3						
		Α	Blue-Ray Disc						
		В	Super Audio CD						
		С	HD DVD						
		D	PMP						

Audio InfoFrame

The transmission audio information is stored in the Audio InfoFrame, and sent.

Color The Audio InfoFrame is not sent.	(1)	OFF/ON	This setting determines whether the Audio InfoFrame is to be sent.							
Time Audio InfoFrame is sent.			_							
Listed below are the Audio InfoFrame settings. These settings are not related to the video and audio output settings. Thise settings are not related to the video and audio output settings. Thise settings are not related to the video and audio output settings. Thise is the Audio InfoFrame type setting. Thise is the Audio InfoFrame version setting. Thise is the Audio InfoFrame version setting. Refer to Stream Header. I lic Go958 PCM 2 AC-3 3 MPEG1 (Layers 18.2) 4 MP3 (MPEG1 Layers 3) 5 MPEG2 (multi ch.) 6 AAC 7 DTS 8 ATRAC 9 One Bit Audio A Dolby Digital + B DTS-HD C MLP D DST E WMA Pro F Refer Extension Thise is the Audio Coding Ext Type setting. (5) Coding Ext Type Thise is the Audio Coding Ext Type setting. (6) Channel Count This is the Audio Coding Ext Type setting. Refer to Stream Header 1 2 ch This is the Audio Channel Count setting. O Refer StreamHeader Refer to Stream Header 1 2 ch This is the Sampling Frequency setting. O Refer StreamHeader Refer to Stream Header 1 32 kHz 2 44.1 kHz 3 48 kHz 4 88.2 kHz			1							
* These settings are not related to the video and audio output settings. (2) Type This is the AVI Audio InfoFrame type setting. 4 * "Type" is displayed only. It cannot be changed. This is the Audio InfoFrame version setting. 1 * "Version" is displayed only. It cannot be changed. This is the Audio Coding Type setting. 0 Refer StremHeader Refer to Stream Header 1 IEC60958 PCM 2 AC-3 3 MPEG1 (Layers 1&2) 4 MP3 (MPEG1 Layer 3) 5 MPEG2 (multi ch.) 6 AAC 7 DTS 8 ATRAC 9 One Bit Audio A Dolby Digital + B DTS-HD C MLP D DST E WMA Pro F Refer Extension (5) Coding Ext Type This is the Audio Coding Ext Type setting. (6) Channel Count This is the Audio Coding Ext Type setting. (7) Sampling Freq This is the Audio Coding Ext Type setting. (7) Refer StreamHeader Refer to Stream Header 1 2 ch Refer to Stream Header Refer to Stream Header Refer to Stream Header	Listed	below are the Audio InfoFram	ne se							
This is the AVI Audio InfoFrame type setting. 4 * "Type" is displayed only. It cannot be changed.					ettings.					
3 Version			_							
This is the Audio InfoFrame version setting. This is the Audio InfoFrame version setting. Section Stream Header Nefer to Stream Header			4	**						
1	(3)	Version	Th							
O Refer StremHeader Refer to Stream Header 1 IEC60958 PCM 2 AC-3 3 MPEG1 (Layers 1&2) 4 MP3 (MPEG1 Layer 3) 5 MPEG2 (multi ch.) 6 AAC 7 DTS 8 ATRAC 9 One Bit Audio A Dolby Digital + B DTS-HD C MLP D DST E WMA Pro F Refer Extension F Refer Extension This is the Audio Coding Ext Type setting. O HE-AAC 1 HE-AAC 2 MPEG Surround MPEG Surround This is the Audio Channel Count setting. O Refer StreamHeader Refer to Stream Header 1 2 ch This is the Sampling Frequency setting. O Refer StreamHeader Refer to Stream Header 1 32 kHz 2 44.1 kHz 3 48 kHz 4 88.2 kHz 4 88.2 kHz Code Co			1	·······································						
1 IEC60958 PCM 2 AC-3 3 MPEG1 (Layers 1&2) 4 MP3 (MPEG1 Layer 3) 5 MPEG2 (multi ch.) 6 AAC 7 DTS 8 ATRAC 9 One Bit Audio A Dolby Digital + B DTS-HD C MLP D DST E WMA Pro F Refer Extension This is the Audio Coding Ext Type setting. O HE-AAC 1 HE-AAC 2 MPEG Surround MPEG Surround This is the Audio Channel Count setting. O Refer StreamHeader Refer to Stream Header 1 2 2 Ch This is the Sampling Frequency setting. O Refer StreamHeader Refer to Stream Header 1 3 2 kHz 2 44.1 kHz 3 48 kHz 4 88.2 kHz 4 8 8 2 4 4 8 8 2 4 4 8 8 2 4 4 8 8 2 4 4 8 8 2 4 4 8 8 2 4 4 8 8 2 4 4 8 2 4 4 8 2 4 4 8 2	(4)	Coding Type	Th	· · · · · · · · · · · · · · · · · · ·						
2 AC-3 3 MPEG1 (Layers 1&2) 4 MP3 (MPEG1 Layer 3) 5 MPEG2 (multi ch.) 6 AAC 7 DTS 8 ATRAC 9 One Bit Audio A Dolby Digital + B DTS-HD C MLP D DST E WMA Pro F Refer Extension This is the Audio Coding Ext Type setting. O HE-AAC 1 HE-AAC 2 MPEG Surround MPEG Surround This is the Audio Channel Count setting. O Refer StreamHeader Refer to Stream Header 1 2 ch C C C C C C C C C			0	Refer StremHeader	Refer to Stream Header					
3 MPEG1 (Layers 1&2)			1	IEC60958 PCM						
A MP3 (MPEG1 Layer 3)			2	AC-3						
Sampling Freq Sampling Freq Sampling Frequency setting. Sampling Freq Sampling Frequency setting. Sampling Freq Sampling Freq Sampling Frequency setting. Sampling Freq Sampling Frequency setting. Sampling Freq Sampling Freq Sampling Frequency setting. Sampling Freq			3	MPEG1 (Layers 1&2)						
6 AAC 7 DTS 8 ATRAC 9 One Bit Audio A Dolby Digital + B DTS-HD C MLP D DST E WMA Pro F Refer Extension (5) Coding Ext Type This is the Audio Coding Ext Type setting. 0 HE-AAC 1 HE-AACv2 2 MPEG Surround (6) Channel Count This is the Audio Channel Count setting. 0 Refer StreamHeader Refer to Stream Header 1 2 ch 7 8 ch This is the Sampling Frequency setting. 0 Refer StreamHeader Refer to Stream Header 1 32 kHz 2 44.1 kHz 3 48 kHz 4 88.2 kHz			4 MP3 (MPEG1 Layer 3)							
Total			5	MPEG2 (multi ch.)						
Sampling Freq Sampling Frequency setting. Sampling Frequency setting. Sampling Frequency setting. O Refer Stream Header Stream Hea			6	AAC						
9 One Bit Audio			7	DTS						
A Dolby Digital + B DTS-HD C MLP D DST E WMA Pro F Refer Extension (5) Coding Ext Type This is the Audio Coding Ext Type setting. 0 HE-AAC 1 HE-AACv2 2 MPEG Surround (6) Channel Count This is the Audio Channel Count setting. 0 Refer StreamHeader Refer to Stream Header 1 2 ch 7 8 ch (7) Sampling Freq This is the Sampling Frequency setting. 0 Refer StreamHeader Refer to Stream Header 1 32 kHz 2 44.1 kHz 3 48 kHz 4 88.2 kHz			8 ATRAC							
B DTS-HD C MLP D DST E WMA Pro F Refer Extension (5) Coding Ext Type This is the Audio Coding Ext Type setting. 0 HE-AAC 1 HE-AACv2 2 MPEG Surround (6) Channel Count This is the Audio Channel Count setting. 0 Refer StreamHeader Refer to Stream Header 1 2 ch 7 8 ch (7) Sampling Freq This is the Sampling Frequency setting. 0 Refer StreamHeader Refer to Stream Header 1 32 kHz 2 44.1 kHz 3 48 kHz 4 88.2 kHz										
C MLP D DST E WMA Pro F Refer Extension (5) Coding Ext Type This is the Audio Coding Ext Type setting. 0 HE-AAC 1 HE-AACv2 2 MPEG Surround This is the Audio Channel Count setting. 0 Refer StreamHeader Refer to Stream Header 1 2 ch 7 8 ch (7) Sampling Freq This is the Sampling Frequency setting. 0 Refer StreamHeader Refer to Stream Header 1 32 kHz 2 44.1 kHz 3 48 kHz 4 88.2 kHz			Α							
D DST			В	DTS-HD						
E WMA Pro F Refer Extension			С	MLP						
F Refer Extension			D	DST						
(5) Coding Ext Type This is the Audio Coding Ext Type setting. 0 HE-AAC 1 HE-AACv2 2 MPEG Surround (6) Channel Count This is the Audio Channel Count setting. 0 Refer StreamHeader Refer to Stream Header 1 2 ch 7 8 ch This is the Sampling Frequency setting. 0 Refer StreamHeader Refer to Stream Header 1 32 kHz 2 44.1 kHz 3 48 kHz 4 88.2 kHz			Е	WMA Pro						
O HE-AAC 1 HE-AACv2 2 MPEG Surround			F	Refer Extension						
1 HE-AACv2 2 MPEG Surround	(5)	Coding Ext Type	Th	_	t Type setting.					
Channel Count This is the Audio Channel Count setting. O Refer StreamHeader Refer to Stream Header 1 2 ch This is the Sampling Frequency setting. O Refer StreamHeader Refer to Stream Header O Refer StreamHeader Refer to Stream Header 1 32 kHz 2 44.1 kHz 3 48 kHz 4 88.2 kHz 4 88.2 kHz 1 1 1 1 1 1 1 1 1			0							
(6) Channel Count This is the Audio Channel Count setting. 0 Refer StreamHeader Refer to Stream Header 1 2 ch 7 8 ch This is the Sampling Frequency setting. 0 Refer StreamHeader Refer to Stream Header 1 32 kHz 2 44.1 kHz 3 48 kHz 4 88.2 kHz			1							
0 Refer StreamHeader Refer to Stream Header 1 2 ch 7 8 ch This is the Sampling Frequency setting. 0 Refer StreamHeader Refer to Stream Header 1 32 kHz 2 44.1 kHz 3 48 kHz 4 88.2 kHz										
1 2 ch 7 8 ch (7) Sampling Freq This is the Sampling Frequency setting. 0 Refer StreamHeader Refer to Stream Header 1 32 kHz 2 44.1 kHz 3 48 kHz 4 88.2 kHz	(6)	Channel Count	Th							
7 8 ch (7) Sampling Freq This is the Sampling Frequency setting. 0 Refer StreamHeader Refer to Stream Header 1 32 kHz 2 44.1 kHz 3 48 kHz 4 88.2 kHz			0		Refer to Stream Header					
This is the Sampling Frequency setting. This is the Sampling Frequency setting. Refer StreamHeader Refer to Stream Header 1 32 kHz 2 44.1 kHz 3 48 kHz 4 88.2 kHz			1	2 ch						
This is the Sampling Frequency setting. This is the Sampling Frequency setting. Refer StreamHeader Refer to Stream Header 1 32 kHz 2 44.1 kHz 3 48 kHz 4 88.2 kHz										
0 Refer StreamHeader Refer to Stream Header 1 32 kHz 2 44.1 kHz 3 48 kHz 4 88.2 kHz										
1 32 kHz 2 44.1 kHz 3 48 kHz 4 88.2 kHz										
2 44.1 kHz 3 48 kHz 4 88.2 kHz			0		Refer to Stream Header					
3 48 kHz 4 88.2 kHz			1							
4 88.2 kHz										
			3							
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1			<u> </u>							
			5	96 kHz						
6 176.4 kHz			_							
7 192 kHz			7	192 kHz						

(8)	Sample Size	Th	is is tl	ne Samp	ole Size s	sett	ing.							
		0	0 Refer StreamHeader Refer to Stream Header											
		1	16 b	it										
		2	20 b	it										
		3	24 b	it										
(9)	Speaker Placement	Th	is is tl	ne Chan	nel/Spea	ike	r Alloc	ation s	etting.					
				is the Channel/Speaker Allocation setting. 8ch 7ch 6ch 5ch 4ch 3ch 2ch 1ch										
		0			-	-		-	-	-	FR	FL		
		1			-	-		-	-	LFE	FR	FL		
		2			-	-		-	FC	-	FR	FL		
		3			-	-		-	FC	LFE	FR	FL		
		4			-	-		RC	-	-	FR	FL		
		5			-	-		RC	-	LFE	FR	FL		
		6			-	-		RC	FC	-	FR	FL		
		7			-	<u> </u>		RC	FC	LFE	FR	FL		
		8			-	R	R	RL	_		FR	FL		
		9			-	R	R	RL	-	LFE	FR	FL		
		10			-	R	R	RL	FC	-	FR	FL		
		11			-	R	R	RL	FC	LFE	FR	FL		
		12			RC	R	R	RL	-	-	FR	FL		
		13			RC	R	R	RL	-	LFE	FR	FL		
		14			RC	R	R	RL	FC	-	FR	FL		
		15			RC	R	R	RL	FC	LFE	FR	FL		
		16		RRC	RLC	R	R	RL	-	-	FR	FL		
		17		RRC	RLC	R	R	RL	-	LFE	FR	FL		
		18		RRC	RLC	R	R	RL	FC	-	FR	FL		
		19		RRC	RLC	R	R	RL	FC	LFE	FR	FL		
		20		FRC	FLC	-		-	-	-	FR	FL		
		21		FRC	FLC	-		-	-	LFE	FR	FL		
		22		FRC	FLC	-		-	FC	-	FR	FL		
		23		FRC	FLC	-		-	FC	LFE	FR	FL		
		24		FRC	FLC	-		RC	-	-	FR	FL		
		25		FRC	FLC	-		RC	-	LFE	FR	FL		
		26		FRC	FLC	-		RC	FC	-	FR	FL		
		27		FRC	FLC	-		RC	FC	LFE	FR	FL		
		28		FRC	FLC	R	R	RL	-	-	FR	FL		
		29		FRC	FLC	R	R	RL	-	LFE	FR	FL		
		30		FRC	FLC	R	R	RL	FC	-	FR	FL		
		31		FRC	FLC		R	RL	FC	LFE	FR	FL		
(10)	Level Shift Value				Shift Va									
		0 -	15	The	decibel	(dE	3) leve	l is set	here.					
(11)	Down-mix	Th			mix In	hib	it Flag	setting	J					
		0	Perr	nitted / I	No Info		Perm of this		no inforr	nation ab	out any	assertion		
		1	Prof	nibited			Prohi							

(12)	LEF PB Level	Th	is is the LEF Playback Level setting.
		0	Undnown
		1	0 dB Playback
		2	+10 dB Playback

■ MPEG InfoFrame

If the original source of the data prior to its conversion to HDMI is MPEG data, its information is stored in MPEG InfoFrame, and sent.

(1)	OFF/ON	Th	s setting determines whether the MPEG InfoFrame is to be sent.				
,		0	OFF	The MPEG InfoFrame is not sent.			
		1	ON	The MPEG InfoFrame is sent.			
Listed below are the MPEG InfoFrame settings.							
* The	* These settings are not related to the video and audio output settings.						
(2)	Туре	Th	nis is the MPEG InfoFrame type setting.				
		5	* "Type" is displayed o	* "Type" is displayed only. It cannot be changed.			
(3)	Version	Th	is is the MPEG InfoFrame	e version setting.			
		1	* "Version" is displayed only. It cannot be changed.				
(4)	Bit Rate	0 -	4294 M 967 k 295 Hz This is the MPEG bit rate setting.				
(5)	Field Repeat	Th	is is the Field Repeat set	ting.			
		0	New Field(picture)				
		1	Repeated Field				
(6)	Frame	Th	is is the MPEG Frame se	etting.			
		0	Unknown(No Data)				
		1	I Picture				
		2	B Picture				
		3	P Picture				

■ NTSC VBI InfoFrame

The vertical blanking interval (VBI) information is stored in NTSC VBI InfoFrame, and sent.

(1)	OFF/ON	This setting determines whether the NTSC VBI InfoFrame is to be sent.				
			0 OFF The NTSC VBI InfoFrame is no			
		1	ON	The NTSC VBI InfoFrame is sent.		
	below are the NTSC VBI InfoF		•	•		
* Th	lese settings are not related to	the	video an	d audio output settings.		
(2)	Type	This is the NTSC VBI InfoFrame type setting.				
		6	* "Тур	e" is displayed only. It cannot be changed.		
(3)	Version	Th	is is the I	NTSC VBI InfoFrame version setting.		
		1	1 * "Version" is displayed only. It cannot be changed.			
(4)	PES Length	0 -	27	This sets the PES length.		
(5)	PES 1-5/6-10/11-15/16-20/ 21-25/26-27	00	- FF	This sets the PES data.		

ACP Packet

"ACP Packet" stands for Audio Content Protection Packet. The copyright protection information added to DVD-Audio and Super Audio CD contents is stored in it, and sent.

(1)	OFF/ON	Th	This setting determines whether the ACP Packet is to be sent.					
		0	OFF	The ACP Packet is not	t sent.			
		1	ON	The ACP Packet is ser	nt.			
Listed	below are the ACP Packet	setting	S.					
* Th	nese settings are not related	d to the	video and audio output	settings.				
(2)	ACP_Type	Th	is is the ACP Type setting	ıg.				
		0	Generic Audio					
		1	IEC60958 Audio					
		2	DVD-Audio					
		3	Super Audio CD					
(3)	DVD-Audio Type	Th	is is the DVD-Audio_Tyr	pe_Dependent_Generati	on setting.			
		0	* This must be set to 1 when "DVD-Audio" has been selected as the					
(4)		1	ACP_Type setting.					
(4)	CopyPermission		Audio_Copy_permission (the information concerning the permission to copy DVD-Audio content) is set here.					
		0	Copy Freely					
		1	1 (reserved)					
		2	Specify CopyNumber					
		3	No More Copies					
(5)	Copy_Number	Audio_copy_number (the number of times DVD-Audio content may						
			copied) is set here.					
		-	1 copies					
		1	2 copies					
		2	4 copies					
		3	6 copies					
		4	8 copies					
		5	10 copies					
		6	3 copies					
(0)	.	7	Copy OneGeneration					
(6)	Quality	Au		in which DVD-Audio con	tent is to be copied) is set			
			No. of channels	Sampling frequency	Bit width			
		0	2 channels or less	Lower than 48 kHz	16 bits or less			
		1	2 channels or less	No restrictions	No restrictions			
		2	No restrictions	No restrictions	No restrictions			
		3	No restrictions	Lower than 48 kHz	16 bits or less			
(7)	Transaction	Audio_Transaction (whether the status of optional access control is contain			access control is contained			
		in t	he DVD-Audio data) is s	set here.				
		0	Not Present	not present				
		1	1 (reserved) Reserved for copyright management s					

(8)	Count_A		he number of times the Super Audio CD contents can be copied by ed secure recorder) is set here.			
		0	Prohibited			
		1 - 254	Allowed from 1 to 254 times			
		255	No restrictions			
(9)	(9) Count_S		Count_S (the number of times the Super Audio CD contents can be copied by a secure recorder) is set here.			
		0	Prohibited			
		1 - 254	Allowed from 1 to 254 times			
		255	No restrictions			
(10)	Count_U		the number of times the Super Audio CD contents can be copied ted recorder) is set here.			
		0	Prohibited			
		1 - 254	Allowed from 1 to 254 times			
		255	No restrictions			
(11)	CCI_Flags_Q_A		_Q_A (the quality in which Super Audio content is to be copied by ed secure recorder) is set here.			
			ality			
			ted DSD Quality			
(12)	CCI_Flags_Q_S	CCI_Flags_Q_S (the quality in which Super Audio content is to be copied by a secure recorder) is set here.				
		0 CD Qu	<u> </u>			
		1 Unlimit	ted DSD Quality			
(13)	CCI_Flags_Q_U	CCI_Flags_Q_U (the quality in which Super Audio content is to be copied by an unlisted recorder) is set here.				
		0 CD Qu	ality			
			ted DSD Quality			
(14)	CCI_Flags_Move_A	CCI_Flags_Move_A (whether copying of Super Audio content by individual track onto an approved secure recorder is allowed) is set here.				
		0 Not Allowed				
		1 Allowe	d			
(15)	CCI_Flags_Move_S	CCI_Flags track onto	_Move_S (whether copying of Super Audio content by individual a secure recorder is allowed) is set here.			
		0 Not All	0 Not Allowed			
		1 Allowe	1 Allowed			
(16)	CCI_Flags_Move_U		_Move_U (whether copying of Super Audio content by individual an unlisted recorder is allowed) is set here.			
		0 Not All	owed			
		1 Allowe	d			

■ ISRC Packet

"ISRC Packet" stands for International Standard Recording Code Packet. The sound source identification codes and other information are stored in it, and sent.

(1)	OFF/ON ISRC1	W	hether to send the ISRC1	Packet is set here.			
,		0	OFF	The ISRC1 Packet is not sent.			
		1	ON	The ISRC1 Packet is sent.			
(2)	OFF/ON ISRC2	W	hether to send the ISRC2	Packet is set here.			
,		0	OFF	The ISRC2 Packet is not sent.			
		1	ON	The ISRC2 Packet is sent.			
Listed	below are the ISRC Packet s	ettin	gs.				
* The	ese settings are not related to	the	video and audio output s	ettings.			
(3)	ISRC_Cont	Th	is is the ISRC Continued	setting.			
		0	ISRC2 is not sent.				
		1	ISRC2 is sent.				
(4)	ISRC_Valid	Th	his is the ISRC Valid setting.				
				ner data has been set to the ISRC_Status in the			
		_		he UPC_EAN_ISRC_XX field is valid.)			
		-					
		1	Valid				
(5)	ISRC_Status		This is the ISRC_Status setting.				
		(ISRC_Status indicates the position on the current track.)					
		_	9				
		1	Intermediate				
			Ending				
(6)	Validity Info		is is the Validity informati				
		<u> </u>		ISRC and UPC/EAN data is valid or invalid.)			
			Vo Validity				
		1	UPC/EAN				
		2	UPC/EAN and ISRC				
(7)	Catalagua Cada			/UDC/FAN #1 12) cotting			
(7)	Catalogue Code		imber consisting of 13 ((UPC/EAN #1 - 13) setting.			
(0)	Country Code			•			
(8)	Country Code	_	is is the Country Code (IS	· · · · · · · · · · · · · · · · · · ·			
(0)	First Owner Code		Character string consisting of 2 letters This is the First Owner Code (ISRC #3 - 5) setting.				
(9)	First Owner Code	_		<u> </u>			
(10)	Veer of Dee Code		naracter string consisting				
(10)	Year of Rec. Code		This is the Year-of-recording code (ISRC #6 - 7) setting.				
(44)	December 14 O1	_	imber consisting of 2 di				
(11)	Recording-item Code			/ Recording-item code (ISRC #8 -12) setting.			
		Νι	Number consisting of 5 digits				

■ Gamut Metadata Packet

If the transmission images have been sent by xvYCC, their color space information (range, etc.) is stored in the Gamut Metadata Packet, and sent.

(1)	OFF/ON	This setting determines whether the Gamut Metadata Packet is to be sent.			ether the Gamut Metadata Packet is to be sent.		
		0	OFF		The Gamut Metadata Packet is not sent.		
		1	ON		The Gamut Metadata Packet is sent.		
Listed	below are the Gamut Metadat	аР	acket set	tings.			
* Th	ese settings are not related to	the	video an	ıd audio output s	ettings.		
(2)	Next-Field			Next_Field settin			
					D (Gamut Boundary Description) sent in this		
		_			applicable to the next video field.)		
		0 1	Not app Applical				
(3)	No_Current_GBD			No_Current_GBI	D sotting		
(3)	No_current_GBD				D setting. D sent in this Gamut Metadata Packet is valid or		
			alid.)	itee whether ebi	b cont in this canat Metadata i donot is valid of		
		0	Invalid				
		1 Valid					
(4)	GBD_Profile	Th	is is the	GBD_Profile sett	ting.		
		0	P0				
		1	1 P1				
		2	2 P2				
		3	3 P3				
(5)	AffectedGamutSeqNum	0 -	15		cted_Gamut_Seq_Num setting.		
					the number of GBD (Gamut boundary		
(C)	Current ComutCoallum	_	15	•	nt in this Gamut Metadata Packet.)		
(6)	Current_GamutSeqNum	0 -	15		ent_Gamut_Seq_Num setting. the number of the GBD that applies to the current		
				video field.)	the number of the OBB that applies to the current		
(7)	Packet_Seq	Th	is is the I	Packet_Seq sett	ing.		
					mut Metadata Packet is in the Gamut Metadata		
		—	cket Seq				
		0	Interme	ediate	Intermediate packet in sequence		
		1	First		First packet in sequence		
		2	Last		Last packet in sequence		
(0)	F	3	Only		Only packet in sequence		
(8)	Format_Flag			Format_Flag set ites the format of			
		0		s/Facets	Vertices/Facets description		
		_	Range	sh acets	Range description		
(9)	Colorprecision	This is the GBD Color Precision setting.					
(0)	Colorprodiction	(This indicates the precision (bit width) of the vertex and range data in GBD.)					
		0	8 bit	<u>,</u>	, , , , , , , , , , , , , , , , , , , ,		
		1	10 bit				
		2	12 bit				
1		1					


(10)	Co	olor_Space	Th	is is the GBD_Color_Spa			
) has been selected as the		
			0	ITU-R BT.709	ITU-R BT.709 (using RG	SB)	
			1	xvYCC601	xvYCC601 (IEC61966-2	2-4-SD) (using YCbCr)	
			2 xvYCC709 xvYCC709 (IEC61966-2			2-4-HD) (using YCbCr)	
			3	XYZ	XYZ		
				When Range (1) has be	en selected as the Form	at_Flag setting	
			0	Reserved	Reserved		
			1	xvYCC601	RGB expression of xvY0	CC601 coordinates	
			2	xvYCC709	RGB expression of xvY0	CC709 coordinates	
			3	Reserved	Reserved		
(11)	11) Number_Vertices			This is the Number_Vertices setting. * This is displayed only when Vertices/facets (0) has been selected as the Format_Flag setting.			
			8 b 10	olorprecision = bit: 4 - 8 bit: 4 - 6 bit: 4 - 5			
(12)	Pa Da	cked_GBD_Vertices_ ita	This is the Packed_GBD_Vertices_Data setting. * This is displayed only when Vertices/facets (0) has been selected as the Format Flag setting.				
		Data1	Сс	olorprecision =	The Y, Cb and Cr values	he Y, Cb and Cr values of the colors (Data) are	
		Data2		oit: 0 - 255	set here.		
		Data3		bit: 0 - 1023			
		Data4	12	bit: 0 - 4095			
(13)	Pa	cked_Range_Data	This is the Packed_Range_Data setting. * This is displayed only when Range (1) has been Format_Flag setting.			selected as the	
	Min_Red		_	olorprecision =		The Range Data of the	
		Max_Red		8 bit: -3.96875 - +3.96875		colors (Red, Green and	
		Min_Green	_	bit: -3.9921875 - +3.992		Blue) are set here.	
		Max_Green] 12	bit: -3.998046875 - +3.99	98046875		
		Min_Blue					
		Max_Blue					

4.2.4 CEC function

HDMI can send and receive the CEC commands, and display them on the screen. The CEC function has three operation modes.

a) Monitor mode (Monitor)


In this mode, the sending and receiving of the commands generated between the equipment connected to CEC are displayed on the screen.

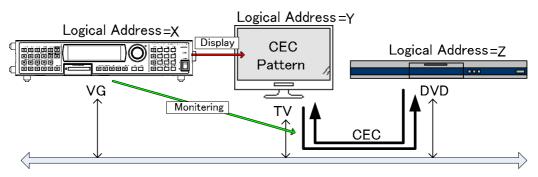

Monitor Mode

b) Transmission mode (Transmission)


In this mode, the commands are sent from the generator to the designated logical address.

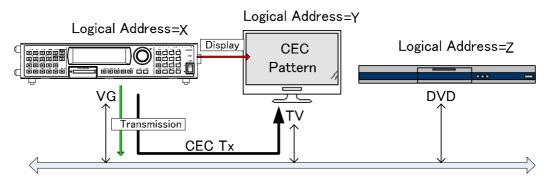

Transmission Mode


c) Response mode (Response)

In this mode, the commands are sent as responses when the designated commands have been transmitted.

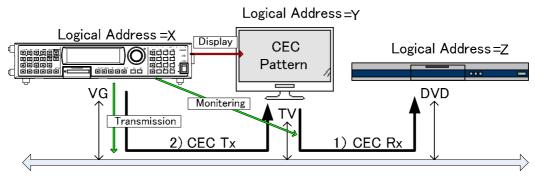


Response Mode


<CEC display procedure>

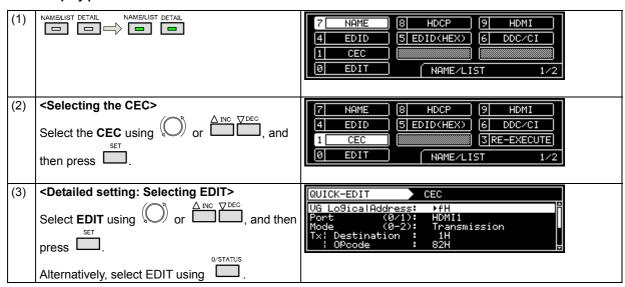

<Table of CEC setting items>

(1)	VG Logical Address	This sets the logical address of the VG generator. (0 to F)				
(2)	Port (0-1)	_		s the port used for C		
		0	-		CEC is executed using HDMI1.	
		1	HDN	112	CEC is executed using HDMI2.	
(3)	Mode (0-2)	Th	is set	s the operation mod	le.	
		0	Monitor		The CEC commands are monitored.	
		1	Tran	smission	The CEC commands set using items (4) to (7) are transmitted.	
		2	Res	ponse	When commands have been received under conditions (8) to (12), the CEC commands set using items (4) to (7) are transmitted.	
	e the CEC commands to be s					
The foll	owing items are set when Tra	ansı	nissi	•	as been selected as the Mode setting .	
(4)	Tx Destination	-		This sets the address of the destination (transmission destination CEC commands).		
(5)	Tx Opcode	-		This sets the OPCode.		
(6)	Tx Data Length	0 t	o 14	This sets the length	h of the Tx data.	
(7)	Tx Data [H] 1-6/7-12/13-14	-		This sets the CEC	command data.	
Set here	e the CEC commands to be r	ece	ived f	rom the VG-870B/8	71B.	
The foll	owing items are set when Re	spo	nse l	nas been selected a	is the Mode setting .	
(8)	Rx Initiator	0 t	οЕ	This sets the addre	ess of the initiator.	
(9)	Rx Destination	0 t	o F		ess of the destination .	
				This can also be set using a logical address other than the one set using item (1).		
(10)	Rx Opcode	-		This sets the OPCode.		
(11)	Rx Data Length	0 t	o 14	This sets the length of the Rx data.		
(12)	Rx Data [H] 1-6/7-12/13-14	-		This sets the CEC	command data.	

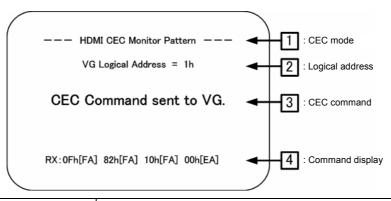

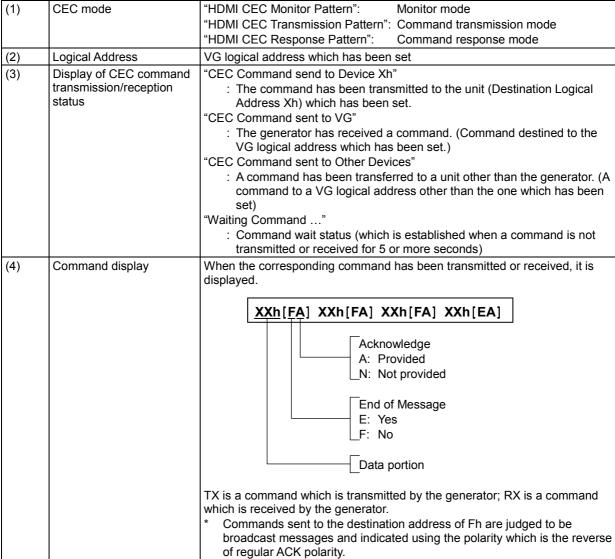


4.2.5 Embedded audio, high bit rate audio (option)

HDMI enables embedded audio and high bit rate audio to be output.

High bit rate audio is treated as an option. Contact your dealer or an ASTRODESIGN sales representative.

The operating procedure is as follows:

- a) Enable the embedded audio to be superimposed on HDMI.
- b) Set the sound source, frequency, level, etc.
- a) Enable the embedded audio to be superimposed on HDMI.

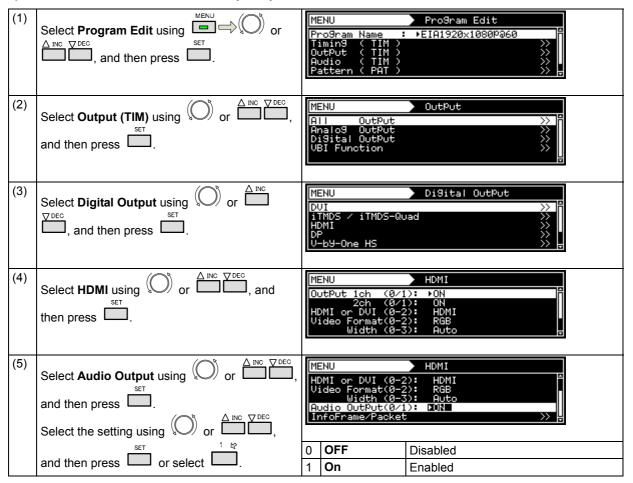

b) Setting the sound source, frequency, level, etc.

For further details on the setting procedure, refer to "4.16 Digital audio."

4.2.6 EDID

For further details on the setting procedure, refer to "6.13.3 EDID."

Note: DDC_CLK of DVI (1CH) is fixed at 40 kHz. EDID does not exist in DDC_CLK of Configuration. DDC_CLK of DVI (2CH) changes in tandem with DDC_CLK of Configuration.

4.2.7 HDCP

For further details on the setting procedure, refer to "8.1 HDCP settings."

4.2.8 DDC/CI

For further details on the setting procedure, refer to "6.13.4 DDC/CI."

4.2.9 LipSync

For further details on the setting procedure, refer to "7.9 LipSync."

4.2.10 VD-1673 (HDMI SWITCHER)

The VD-1673 is an HDMI switcher (with 2 inputs and 8 outputs) made by ASTRODESIGN.

The settings described in this section take effect only when the VD-1673 is connected to the generator and the "mode in which control is exercised by the VG series" has been selected.

* Be absolutely sure to connect the VD-1673 before turning on the power of the generator.

For further details on the settings, refer to the operating instructions of the VD-1673.

<Setting procedure>

(4)	MENII ()	
(1)	Select Program Edit using or SET, and then press.	MENU ProSram Edit ProSram Name : ►EIA1920×1080Pa60 Timin9 (TIM) OutPut (TIM) Audio (TIM) Pattern (PAT) ProSram Edit >> 0 ProSram Edit >> 0 ProSram Edit >> 0 ProSram Edit >> 0 ProSram Edit >> 0 ProSram Edit >> 0 ProSram Edit >> 0 ProSram Edit >> 0 ProSram Edit >> 0 ProSram Edit >> 0 ProSram Edit >> 0 ProSram Edit >> 0 ProSram Edit
(2)	Select Output (TIM) using or or or or or and then press.	MENU OutPut All OutPut >> Analog OutPut >> Digital OutPut >> UBI Function >>
(3)	Select Digital Output using or	MENU Digital OutPut DVI iTMDS / iTMDS-Quad HDMI DP V-b9-One HS Digital OutPut >>
(4)	Select HDMI using or or or and then press.	MENU
(5)	Select VD-1673 (HDMI SWITCHER) using or hand then press.	MENU
(6)	Select the parameters using or	

<Table of setting items>

The items are set for each of the HDMI1 and HDMI2 output channels.

(1)	Mode (0/1)	The output	The output mode is selected here.					
		0 Select	Selection mode					
		1 Distril	bution	Distribution mode				
(2)	IN	The input	The input port is selected here.					
		Setting ra	Setting range: 1 to 2					
(3)	OUT	The output port is selected here.						
		Setting ra	nge: 1 to 8					

4.3 DVI

DVI output connectors are provided on the PC analog unit and DVI unit.


The specifications differ for each of the connectors so refer to the table below.

Unit/connector	Dual-Link	HDCP	Analog
PC analog unit	-	0	0
DVI unit DVI1	0	-	-
DVI unit DVI2	-	0	-

4.3.1 Connectors and pin assignments

● Connector: DVI-I (74320-1004) made by Morex

• Output: TMDS



Pin no.	Signal	Pin no.	Signal	Pin no.	Signal
1	TMDS DATA2-	9	TMDS DATA1-	17	TMDS DATA0-
2	TMDS DATA2+	10	TMDS DATA1+	18	TMDS DATA0+
3	TMDS DATA2/4 G	11	TMDS DATA1/3 G	19	TMDS DATA0/5 G
4	TMDS DATA4-	12	TMDS DATA3-	20	TMDS DATA5-
5	TMDS DATA4+	13	TMDS DATA3+	21	TMDS DATA5+
6	DDC CLK	14	+5 V (DDC power supply *1)	22	TMDS CLK G
7	DDC DATA	15	Ground	23	TMDS CLK+
8	Analog Vsync	16	SENSE	24	TMDS CLK-
C1	Analog Red				
C2	Analog Green				
C3	Analog Blue				
C4	Analog Hsync				
C5	Analog Ground				

^{*1:} Restrictions apply to the supply current of the DDC power supply. Refer to "12.3 Concerning the maximum current consumption of the DDC (DP_PWR) power supply."

4.3.2 DVI unit setting procedure

<DVI unit setting procedure>

(1)	MENU / R	MENU ENGLISH
(1)	Select Program Edit using or	MENU Pro9ram Edit Pro9ram Name : ▶EIA1920x1080P060 ↑
	∆ INC DEC SET	Timin9 (TIM) >> OutPut (TIM) >> >>
	, and then press.	Audio (TIM) >>
		Pattern (PAT)
(2)	(-) A = 7000	
(2)	Select Output (TIM) using or or or or	MENU OutPut
	SET Output (Tim) using a or,	All OutPut >> P Analog OutPut >> Digital OutPut >> V UBI Function >> V
	and then press .	Analog OutPut
	·	77
(3)	△ INC	MENU DiSital OutPut
	Select Digital Output using or or	DUI >> = iTMDS / iTMDS-Quad >> =
	and then press.	HDMI >>
	, and then proce	DP
		-
(4)	Select DVI using \bigcirc or \bigcirc or \bigcirc , and then	MENU DUI
	Select DVI using or, and then	OutPut 1ch (0/1): ▶ON
	press .	2ch (0/1): ON Mode (0-3): Sin9le(Auto)
	press	CTL0 (0/1): Low CTL1 (0/1): Low
(5)	M \(\sum \) INC \(\subseteq \text{DEC} \)	For further details on the parameters, refer to the table
	Select the items using \bigcirc or $\stackrel{\triangle \text{INC}}{\longrightarrow} \stackrel{\nabla \text{DEC}}{\longrightarrow}$, and	below.
	their proces	
	then press	
	<pre><inputting parameters="" the=""></inputting></pre>	
	Select the parameters using \bigcirc or $\stackrel{\triangle \text{INC}}{\sqsubseteq}$	
	, and then press .	
	Alternatively:	
	Select the parameters using the number keys overtatus 9/F & SET	
	(to), and then press .	

<DVI unit setting parameters>

(1)	Output 1ch (0/1)	Thi	This sets On or Off for each channel.		
	Output 2ch (0/1)		The same settings as the ones described in "4.1.1 Setting the output interfaces to ON or OFF" can also be established.		
		0	Off	No output.	
		1	On	Output.	
(2)	Mode (0/1)	set sel by bec "Si to "D 330 fro	tting which is independer ected. It is also possible which the bit length for pen set here is discarded. ingle" can be selected who had a can be selected who me than and data can be me channel 2.	link format of the images to be output from DVI. A not of the bit length for pattern drawing can be to select the bit length automatically. The portion pattern drawing exceeds the bit length which has A deficient portion is filled with zeros. When the dot clock frequency ranges from 25 MHz be output from output channels 1 and 2. The data is output by Single Link from output channels 1 and 2. The portion by which the bit length for pattern drawing exceeds 8 bits is	
				discarded.	
		1	Dual (8 bits)	The data is output by Dual Link from output channel 1. The portion by which the bit length for pattern drawing exceeds 8 bits is discarded. Data is not output from channel 2.	
		2	Single (16 bits)	Up to 16 bits are output by Single Link using the two links of output channel 1. The portion by which the bit length for pattern drawing is deficient from the bit length which has been set here is filled with zeros. The data is output by Single Link from output channels 2. The portion by which the bit length for pattern drawing exceeds 8 bits is discarded.	
		3	Single (Auto)	The data is output by Single Link from output channels 1 and 2. Single (8 bits) or Single (16 bits) is automatically selected depending on the bit length for pattern drawing.	
(3)	CTL0/CTL1	This is not normally used. Keep it at the low setting.			

4.3.3 PC analog unit (DVI) setting procedure

(1)	Select Program Edit using SET or and then press .		ENU ro9ram Name imin9 (TIM) utPut (TIM) udio (TIM) attern (PAT)	Pro9ram Edit ⇒EIA1920×1080Pa60 >> >> >> >> >> >> >> >> >>
(2)	Select Output (TIM) using or or or or or and then press .	9	ENU II OutPut nalo9 OutPut i9ital OutPut BI Function	OutPut >>> >>> >>> >>> >>> >>> >>> >>> >>>
(3)	Select Analog Output using or		ENU eneral C: RGB (BNC) C: VGA (D-Sub) C: DVI V: COMPOSITE	Analog OutPut
(4)	Select DVI using or $\stackrel{\triangle \text{ INC}}{\longleftarrow}$ or $\stackrel{\nabla \text{DEC}}{\longleftarrow}$, and then press $\stackrel{\text{SET}}{\longleftarrow}$.		ENU utPut Analo9 (0 DiSit al(0	PC-DVI 3/1): →ON 3/1): ON
(5)	Select Output Analog using or or			as the ones described in "4.1.1 Setting es to ON or OFF" can also be
	, and then press .	0	Off	No output.
		1	On	Output.
	Select the parameters using or			


4.3.4 DVI data transfer systems


<Specifications with 8-bit output>


[Single (8 bit)]

The same images are output to all channels 1 and 2. The output gray scale is 8 bits.

Given here as an example for explanatory purposes is a case where the resolution is 1280×1024 , the dot clock frequency is 108 MHz and the output gray scale is 8 bits.

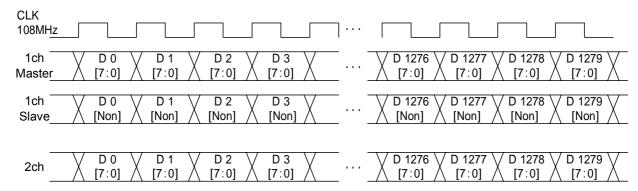







[Dual (8 bit)]


The images are output with channel 1 master and channel 1 slave making a pair. Eight bits are used for the output gray scale.

During dual output, the channel 2 output goes OFF.

Given here as an example for explanatory purposes is a case where the resolution is 1280×1024 , the dot clock frequency is 108 MHz and the output gray scale is 8 bits.

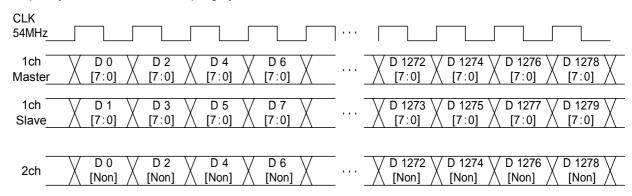












<Specifications with 16-bit output>

[Single (16bit)]


The 16-bit images are output with channel 1 master and channel 1 slave making a pair.


The higher 8 bits are output to the channel 1 master and the lower 8 bits to the channel 1 slave.

With channel 2, the higher 8 bits are output, and the lower bits are discarded.

Given here as an example for explanatory purposes is a case where the resolution is 1280×1024 , the dot clock frequency is 108 MHz and the output gray scale is 16 bits consisting of 8 bits for channel 1 and 8 bits for channel 2.


CLK 108MH <u>z</u>] · · ·	
1ch _	√ D0 √ D1 √ D2 √ D3 √	-	√ D 1276 \/ D 1277 \/ D 1278 \/ D 1279 \/
Master_			_
1ch	\lor D0 \lor D1 \lor D2 \lor D3 \lor		∨ D 1276 ∨ D 1277 ∨ D 1278 ∨ D 1279 ∨
Slave_	\bigwedge [7:0] \bigwedge [7:0] \bigwedge [7:0] \bigwedge		\bigwedge [7:0] \bigwedge [7:0] \bigwedge [7:0] \bigwedge
_			
2ch	\bigvee D0 \bigvee D1 \bigvee D2 \bigvee D3 \bigvee		∨ D 1276 ∨ D 1277 ∨ D 1278 ∨ D 1279 ∨
2011	\bigwedge [15:8] \bigwedge [15:8] \bigwedge [15:8] \bigwedge		\bigwedge [15:8] \bigwedge [15:8] \bigwedge [15:8] \bigwedge





1CH Master

1CH Slave



2CH

4.3.5 Sync signal polarity setting

For further details on the setting procedure, refer to "4.1.2 Setting the sync signals to ON or OFF and setting the sync signal polarities." The same settings are established for both the DVI analog and digital signals.

4.3.6 EDID

For further details on the setting procedure, refer to "6.13.3 EDID."

Note: The DDC_CLK frequency of DVI (channel 1) is fixed at 40 kHz. It does not exist in DDC_CLK of Configuration. Also, the DDC_CLK frequency of DVI (channel 2) changes in tandem with DDC_CLK of Configuration.

4.3.7 HDCP

For further details on the setting procedure, refer to "8.1 HDCP settings."

4.3.8 DDC/CI

For further details on the setting procedure, refer to "6.13.4 DDC/CI."

4.4 iTMDS, iTMDS Quad

The specifications differ for each of the connectors so refer to the table below.


Unit/connector	Dual-Link	HDCP	Analog
iTMDS unit 1CH	0	- *1	-
iTMDS unit 2CH	0	- *1	-
iTMDS Quad unit 1CH	-	-	-
iTMDS Quad unit 2CH	-	-	-
iTMDS Quad unit 3CH	-	-	-
iTMDS Quad unit 4CH	-	-	-

^{*1} This is scheduled to be supported by the next version (when the firmware is updated).

4.4.1 Connectors and pin assignments

● Connector: DVI-I (74320-1004) made by Morex

• Output: iTMDS, TMDS (8-bit DVI compatible mode)



Pin no.	Signal	Pin no.	Signal	Pin no.	Signal
1	TMDS DATA2-	9	TMDS DATA1-	17	TMDS DATA0-
2	TMDS DATA2+	10	TMDS DATA1+	18	TMDS DATA0+
3	TMDS DATA2/4 G	11	TMDS DATA1/3 G	19	TMDS DATA0/5 G
4	TMDS DATA4-	12	TMDS DATA3-	20	TMDS DATA5-
5	TMDS DATA4+	13	TMDS DATA3+	21	TMDS DATA5+
6	DDC CLK	14	+5 V (DDC power supply *1)	22	TMDS CLK G
7	DDC DATA	15	Ground	23	TMDS CLK+
8	Analog Vsync	16	SENSE	24	TMDS CLK-
C1	Analog Red				
C2	Analog Green				
C3	Analog Blue				
C4	Analog Hsync				
C5	Analog Ground				

^{*1:} Restrictions apply to the supply current of the DDC power supply. Refer to "12.3 Concerning the maximum current consumption of the DDC (DP_PWR) power supply."

4.4.2 iTMDS (4K×2K) unit setting procedure

<iTMDS (4K×2K) unit setting procedure>

(1)	Select Program Edit using SET or and then press .	MENU
(2)	Select Output (TIM) using or or or or and then press .	MENU OutPut All OutPut Analo9 OutPut Di9ital OutPut VBI Function OutPut >>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>
(3)	Select Digital Output using or	MENU Digital OutPut DVI iTMDS / iTMDS-Quad HDMI DP U-b9-One HS Digital OutPut >>
(4)	Select i TMDS using or or or and then press.	MENU iTMDS / iTMDS-Quad
(5)	Select the items using or	For further details on the parameters, refer to the table below.
	Select the parameters using or	

<iTMDS (4K×2K) unit setting parameters>

Output Quad 3,4ch (0/1) On Output.	(1)	Output 1ch (0/1) Output 2ch (0/1) Output Quad 1,2ch (0/1)	This sets On or Off for each channel. The same settings as the ones described in "4.1.1 Setting the output interfaces to ON or OFF" can also be established.			
This sets the output signal format. The signals are output as DVI compatible signals. Eight bits per link are output.			0	Off	No output.	
0 DVI The signals are output as DVI compatible signals. Eight bits per link are output. 1 ITMDS The signals are output as iTMDS signals. Twelve bits per link are output. 1 This sets the bit length and link format of the images to be output from iTMDS. A setting which is independent of the bit length for pattern drawing can be selected. It is also possible to select the bit length automatically. The portion by which has been set here is discarded. A deficient portion is filled with zeros. • When the dot clock frequency is in the range of 25 MHz to 165 MHz. Single Link can be selected, and the data can be distributed to and output from output channels 1 and 2. With the VM-1824-A, the data can be distributed to and output from output channels 1 and 2. With the VM-1824-A, the data or he distributed to and output from channels 1 and 3 and 4 are combined and output from output channels 1 and 2. With the VM-1824-A, the data of channels 1 and 2 and the data of channels 3 and 4 are combined and output by Dual Link • When the dot clock frequency is in the range of 50 MHz to 330 MHz. Dual Link can be selected, and the data can be output by Dual Link • When the dot clock frequency is in the range of 592 MHz to 1800 MHz, Quad Link can be selected, and the data can be output by Dual Link • When the dot clock frequency is in the range of 592 MHz to 1800 MHz, Dual is combined and output by Quad Link. • When the dot clock frequency is in the range of 592 MHz to 1320 MHz, by selecting Octal Link and by using two output boards, the data can be output by combining the data of board #1 output channels 1 and 2 and the data of board #1 channels 1, 2, 3 and 4 are combining the data of board #1 output channels 1 and 2 and the data of board #1 channels 1, 2, 3 and 4 are combined and output by Octal Link. • In the Quad Link or Octal Link mode, the 4K×2K screen splitting operation which uses the frame memory on the board #2 channels 1, and 2 of Single Link. *1.5 Setting the bit length (gray scale) for pattern drawing exceeds 8 bi						
signals. Eight bits per link are output. 1 ITMDS The signals are output as iTMDS signals. Twelve bits per link are output. The signals are output as iTMDS signals. Twelve bits per link are output. This sets the bit length and link format of the bit length or pattern drawing can be selected. It is also possible to select the bit length automatically. The portion by which the bit length for pattern drawing exceeds the bit length which has been set here is discarded. A deficient portion is filled with zeros. ● When the dot clock frequency is in the range of 25 MHz to 165 MHz, Single Link can be selected, and the data can be distributed to and output from output channels 1 and 2. With the VM-1824-A, the data can be distributed to and output from channels 1, 2, 3 and 4. ● When the dot clock frequency is in the range of 50 MHz to 330 MHz, Dua Link can be selected, and the data can be distributed to and output from output channels 1 and 2. With the VM-1824-A, the data of channels 1 and 2 with the VM-1824-A, the data of channels 1 and 2. With the VM-1824-A, the data of channels 1 and 2. With the VM-1824-A, the data of channels 1 and 2. With the VM-1824-A, the data of channels 1 and 2. With the VM-1824-A, the data of channels 1 and 2. Octal Link and by using two output borads, the data can be output by conduct by	(2)	iTMDS or DVI (0/1)	Th			
1 ITMDS The signals are output as iTMDS signals. Twelve bits per link are output. This sets the bit length and link format of the images to be output from iTMDS. A setting which is independent of the bit length automatically. The portion by which the bit length for pattern drawing can be selected. It is also possible to select the bit length automatically. The portion by which the bit length for pattern drawing exceeds the bit length which has been set here is discarded. A deficient portion is filled with zeros. ● When the dot clock frequency is in the range of 25 MHz to 165 MHz. Single Link can be selected, and the data can be distributed to and output from output channels 1 and 2. With the VM-1824-A, the data can be distributed to and output from channels 1, 2, 3 and 4. ● When the dot clock frequency is in the range of 50 MHz to 330 MHz, Dua Link can be selected, and the data can be distributed to and output from output channels 1 and 2. With the VM-1824-A, the data of channels 1 and 2 and the data can be distributed by Dual Link ● When the dot clock frequency is in the range of 290 MHz to 660 MHz, Quad Link can be selected, and the data can be output using output channels 1 and 2. With the VM-1824-A, the data of channels 1, 2, 3 and 4 is combined and output by Quad Link. ● When the dot clock frequency is in the range of 592 MHz to 1320 MHz, by selecting Octal Link and by using two output boards, the data can be output by containing the data of board #1 output channels 1 and 2 and the data of board #2 cuptur channels 1 and 2 with the VM-1824-A, the data of board #2 channels 1 and 2 with the VM-1824 are replaced with Single Link cupture channels 1, 2, 3 and 4 are combined and output by Octal Link. * In the Quad Link or Octal Link mode, the 4K*2K screen splitting operation which uses the frame memory on the board or boards is performed. * With the VM-1824-A, the Dual Link outputs of the VM-1824 are replaced with Single Link cupture. * Single (Bht) Dual (8bit) The data is output by Dual Link from			0	DVI	signals.	
This sets the bit length and link format of the images to be output from ITMDS. A setting which is independent of the bit length for pattern drawing can be selected. It is also possible to select the bit length automatically. The portion by which the bit length for pattern drawing exceeds the bit length which has been set here is discarded. A deficient portion is filled with zeros. When the dot clock frequency is in the range of 25 MHz to 165 MHz, Single Link can be selected, and the data can be distributed to and output from output channels 1 and 2. With the VM-1824-A, the data can be distributed to and output from coutput channels 1 and 2. With the VM-1824-A, the data of channels 1 and 2 and the data can be distributed to and output from output channels 1 and 2. With the VM-1824-A, the data of channels 1 and 2 and the data can be distributed to and output from output channels 1 and 2. With the VM-1824-A, the data of channels 1 and 2 and the data can be output by Dual Link When the dot clock frequency is in the range of 296 MHz to 660 MHz, Quad Link can be selected, and the data can be output using output channels 1 and 2. With the VM-1824-A, the data of channels 1, 2, 3 and 4 is combined and output by Quad Link. When the dot clock frequency is in the range of 592 MHz to 1320 MHz, by selecting Octal Link and by using two output boards, the data can be output by combining the data of board #1 output channels 1, 2, 3 and 4 and bata of board #2 channels 1, 2, 3 and 4 and data of board #2 channels 1, 2, 3 and 4 and data of board #2 channels 1, 2, 3 and 4 and data of board #2 channels 1, 2, 3 and 4 and data of board #2 channels 1, 2, 3 and 4 and data of board #2 channels 1, 2, 3 and 4 and by using the bit length of the VM-1824 are replaced with Single Link or Octal Link mode, the 4K*2K screen splitting operation which uses the frame memory on the board or boards is performed. With the VM-1824-A, the Dual Link outputs of the VM-1824 are replaced with Single Link from output channels 1 and 2. The portion by which			1	iTMDS	The signals are output as iTMDS signals.	
channels 1 and 2. The portion by which the bit length for pattern drawing exceeds 8 bits is	(3)	Mode (0/6)	* * * * 1	MDS. A setting which is in be selected. It is also prition by which the bit lengifich has been set here is When the dot clock freq Single Link can be selected, and output channels 1 in distributed to and output When the dot clock freq Link can be selected, and output channels 1 and 2 and the data of channel when the dot clock freq Quad Link can be selected is combined and output When the dot clock freq Quad Link can be selected in combined and output when the dot clock freq selecting Octal Link and output by combining the data of board #1 channels 1, and 4 are combined and In the Quad Link or Octoperation which uses the performed. With the VM-1824-A, the with Single Link outputs 1 and 2 of Single Link. Schannels 3 and 4 of Single (8bit) Dual (8bit)	link format of the images to be output from dependent of the bit length for pattern drawing ossible to select the bit length automatically. The 1th for pattern drawing exceeds the bit length discarded. A deficient portion is filled with zeros. uency is in the range of 25 MHz to 165 MHz, cted, and the data can be distributed to and output and 2. With the VM-1824-A, the data can be the from channels 1, 2, 3 and 4. I uency is in the range of 50 MHz to 330 MHz, Dual and the data can be distributed to and output from the data can be distributed to and output from the data can be distributed to and output from the data can be distributed to and output from the data can be distributed to and output from the data can be distributed to and output from the data can be distributed to and output from the data can be distributed to and output from the data can be distributed to and output bual Link. I uency is in the range of 296 MHz to 660 MHz, ted, and the data can be output using output the VM-1824-A, the data of channels 1, 2, 3 and 4 by Quad Link. I uency is in the range of 592 MHz to 1320 MHz, by by using two output boards, the data can be data of board #1 output channels 1 and 2 and the channels 1 and 2. With the VM-1824-A, the data 2, 3 and 4 and data of board #2 channels 1, 2, 3 doutput by Octal Link. I Link mode, the 4K×2K screen splitting frame memory on the board or boards is ended to the channels of the VM-1824 are replaced. Channel 1 of Dual Link corresponds to channels similarly, channel 2 of Dual Link corresponds to channels similarly, channel 2 of Dual Link corresponds to channels 1 and 2. The portion by which the bit length for pattern drawing exceeds 8 bits is discarded. (Max. 12 bits with the iTMDS format) The data is output by Quad Link using output channels 1 and 2. The portion by which the bit length for pattern drawing exceeds 8 bits is discarded. (Max. 12 bits with the iTMDS format) The 4K×2K screen splitting operation which uses the frame memory on the board is performed. For details on the s	


		2	Ootal (Shit)	Duruging two output boards the data is suffered by
		3	Octal (8bit) Single (16bit)	By using two output boards, the data is output by Octal Link by combining the data of board #1 output channels 1 and 2 and the data of board #2 output channels 1 and 2. The portion by which the bit length for pattern drawing exceeds 8 bits is discarded. (Max. 12 bits with the iTMDS format) The 4K×2K screen splitting operation which uses the frame memory on the board is performed. For details on the screen splitting method, refer to "Split" in the next section. Up to 16 bits can be output by Single Link using the two linksMaster and Slaveof one connector. The portion by which the bit length for pattern drawing is deficient from the bit length
				which has been set here is filled with zeros. The higher bits are output to the Master and the lower bits to the Slave.
		4	Dual (16bit)	Up to 16 bits can be output by Dual Link using two connectors. The portion by which the bit length for pattern drawing is deficient from the bit length which has been set here is filled with zeros. The higher bits are output to output channel 1 and the lower bits to output channel 2.
		5	Single (Auto)	The data is output by Single Link from output channels 1 and 2. Single (8 bits) or Single (16 bits) is automatically selected depending on the bit length for pattern drawing.
		6	Dual (Auto)	The data is output by Single Link from output channels 1 and 2. Single (8 bits) or Single (16 bits) is automatically selected depending on the bit length for pattern drawing.
(4)	Split (0/8)			tting method for the 4K×2K screen splitting rame memory on the board or boards.
		Qυ	ıadLink	
		0	MODE0	Screen split-into-4 output in the form of a square divided into 4 equal parts
		1	MODE1	Screen vertically split-into-4 output
		2	MODE2	Screen horizontally split-into-2 output
		3	MODE3	Screen vertically split-into-2 output
		4	MODE0 (x4 Mode)	No screen splitting (Non Dividing Mode)
		5	MODE1 (x4 Mode)	Screen splitting (1) (Normal Mode)
		6	MODE2 (x4 Mode)	Screen splitting (2) (Cross Mode)
		7	MODE3 (x4 Mode)	Screen splitting (3) (Dividing Normal Mode)
		8	MODE4 (x4 Mode)	Screen splitting (4) (Dividing Cross Mode)
		Oc	talLink	
		1	MODE0	Screen split-into-4 output in the form of a square divided into 4 equal parts + screen vertically split-into-2 output
		2	MODE1	Screen vertically split-into-4 output + screen vertically split-into-2 output
		3	MODE2	Screen horizontally split-into-2 output + screen vertically split-into-2 output
		4	MODE3	Screen vertically split-into-2 output + screen vertically split-into-2 output
(5)	CTL0/CTL1	Th	is is not normally used. K	Geep it at the low setting.

4.4.3 iTMDS data transfer systems

Specifications for Quad Link modes during 4K×2K mode output

During 4K×2K mode output, the data of four channels are combined using Dual Link equivalent to two channels to output one screen.


- * As shown in the figure below, what is output as the data of channels 1 to 4 for the Master and Slave of Dual Link of VM-1824 is described in this section.
- * Also described below in this section is the Single Link data of the VM-1824-A which is output as the data of channels 1 to 4.

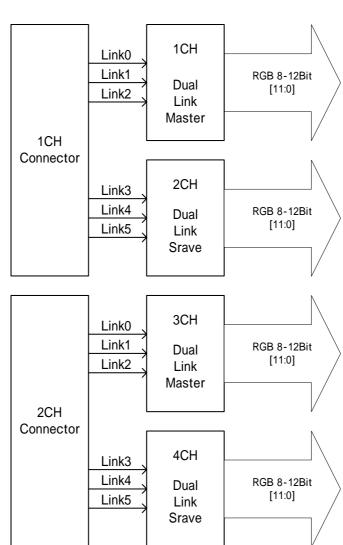

[4K×2K 4-channel output]


[1] MODE0 (Quad Link) (screen split-into-4 output in the form of a square divided into 4 equal parts)

The screen is split into 4 equal parts using channels 1, 2, 3 and 4.

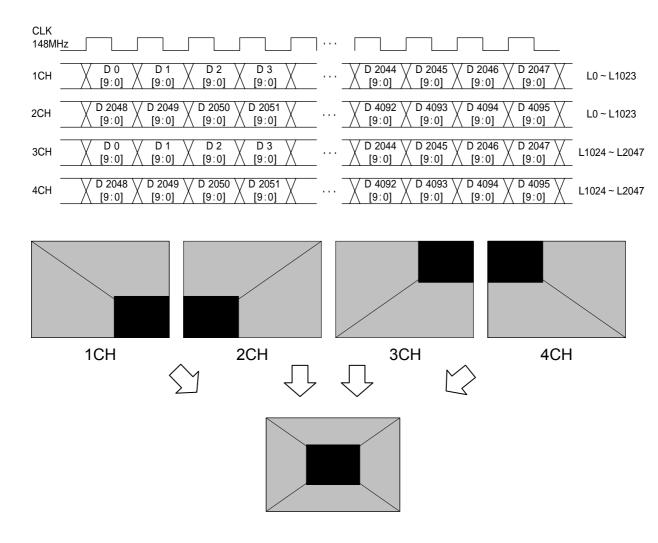


[2] MODE1 (QuadLink) (screen vertically split into 4)

The screen is split vertically into for parts and allocated from the left in the sequence of channel 1, channel 3, channel 2 and channel 4.

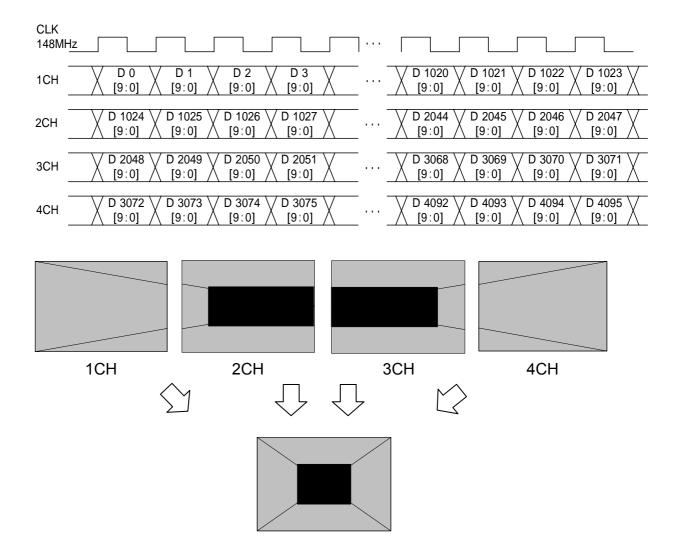


[3] MODE2 (Quad Link) (screen horizontally split into 2)

Using channels 1 and 2, the top half of the image is output in the even and odd numbers; similarly, using channels 3 and 4, the bottom half of the image is output in the even and odd numbers.

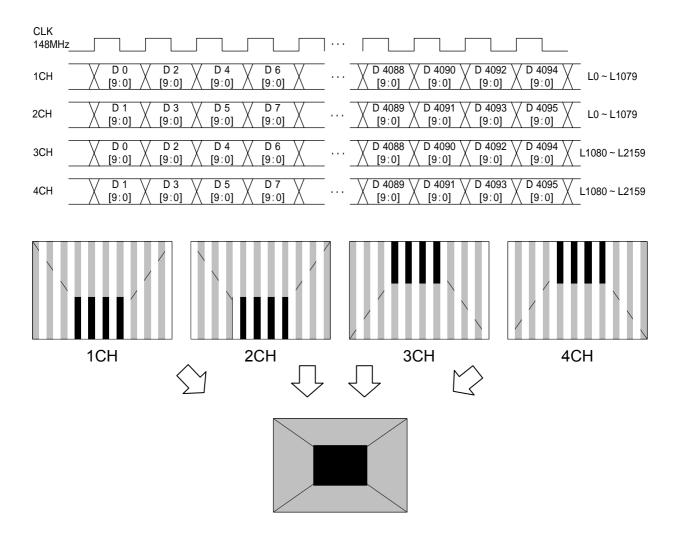

[4] MODE3 (Quad Link) (screen vertically split into 2)

Using channels 1 and 2, the left half of the image is output in the even and odd numbers; similarly, using channels 3 and 4, the right half of the image is output in the even and odd numbers.

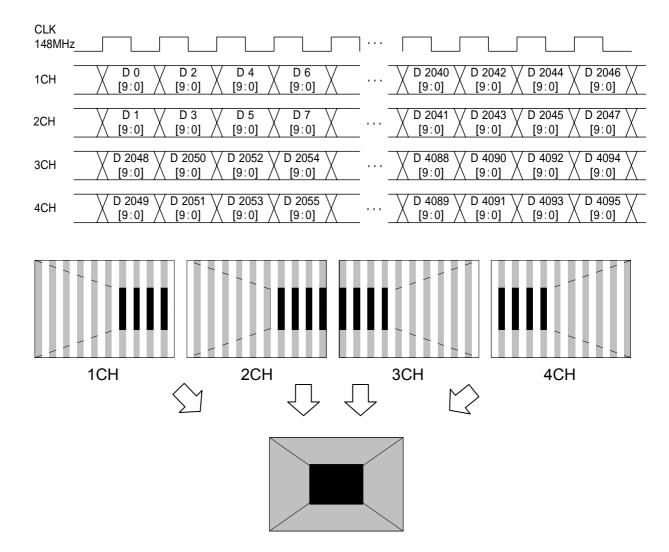

Specifications for modes during ×4 mode (Full HD 240 Hz mode) output

The ×4 mode is an output mode designed for the inspection of flat panel devices which support the Full HD 240 Hz output. By connecting the output of the VG generator to the IA-1540 (iTMDS-LVDS converter box) and by halving the output in the converter box,


The explanation provided below concerns the signals of the four channels output from the VG generator. For an explanation concerning an 8-channel output from LVDS, refer to section "4.13.3 Data transfer systems (V-By-One HS)."

- * As shown in the figure below, what is output as the data of channels 1 to 4 for the Master and Slave of Dual Link of VM-1824 is described in this section.
- * Also described below in this section is the Single Link data of the VM-1824-A which is output as the data of channels 1 to 4.

[Full HD 240 Hz output]

[VG generator iTMDS 4-channel output]

[IA converter box 8-channel output]

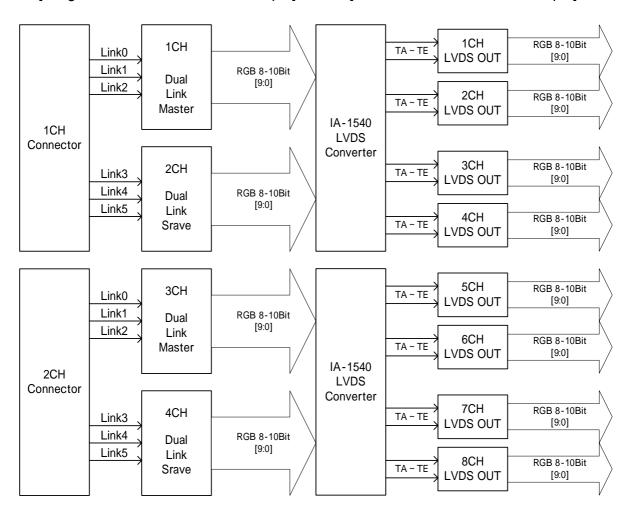


[1] MODE0 ×4 Mode (Quad Link) (Non Dividing Mode)

Using channels 1, 2, 3 and 4, the image is output under the pixel assignment given below without splitting the screen.

Given here as an example for explanatory purposes is a case where the resolution is 1920×1080 , the dot clock frequency is 592 MHz and the output gray scale is 10 bits.

The ×4 mode is an output mode designed for the inspection of flat panel devices which support the Full HD 240 Hz output. By connecting the output of the VG generator to the IA-1540 (iTMDS-LVDS converter box) and by halving the output in the converter box,

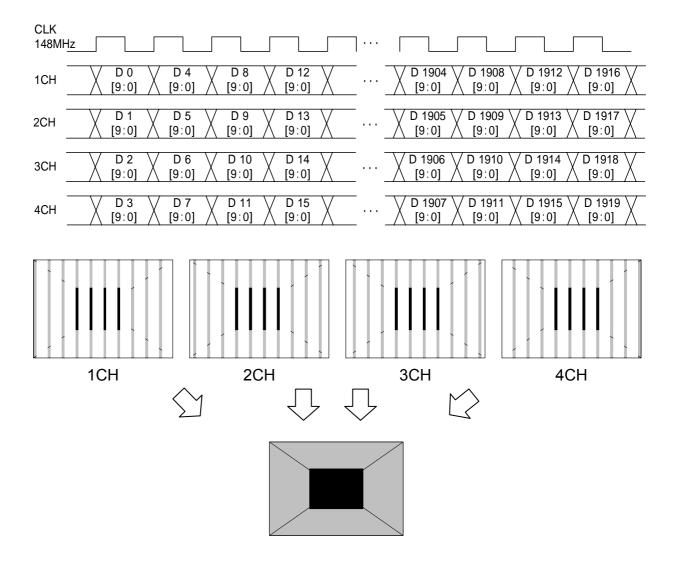


[2] MODE1 ×4 Mode (Quad Link) (Normal Mode)

Using channels 1, 2, 3 and 4, the image is output under the pixel assignment given below without splitting the screen.

Given here as an example for explanatory purposes is a case where the resolution is 1920×1080 , the dot clock frequency is 592 MHz and the output gray scale is 10 bits.

The ×4 mode is an output mode designed for the inspection of flat panel devices which support the Full HD 240 Hz output. By connecting the output of the VG generator to the IA-1540 (iTMDS-LVDS converter box) and by halving the output in the converter box,

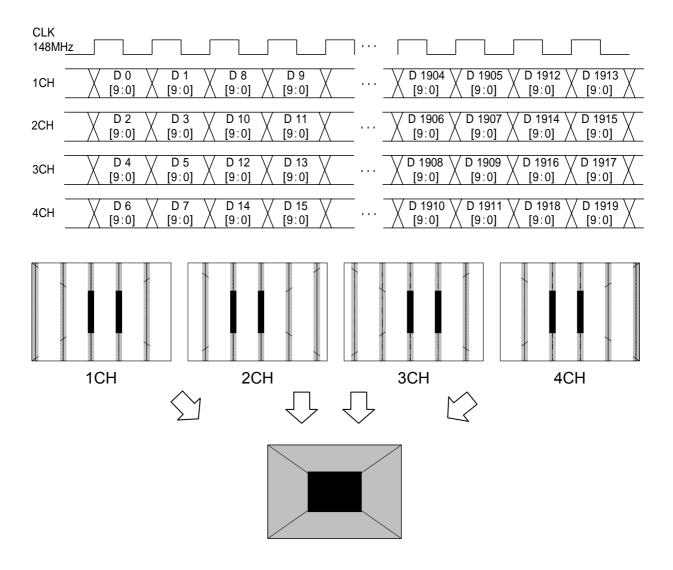


[3] MODE2 ×4 Mode (Quad Link) (Cross Mode)

Using channels 1, 2, 3 and 4, the image is output under the pixel assignment given below without splitting the screen.

Given here as an example for explanatory purposes is a case where the resolution is 1920×1080 , the dot clock frequency is 592 MHz and the output gray scale is 10 bits.

The ×4 mode is an output mode designed for the inspection of flat panel devices which support the Full HD 240 Hz output. By connecting the output of the VG generator to the IA-1540 (iTMDS-LVDS converter box) and by halving the output in the converter box,

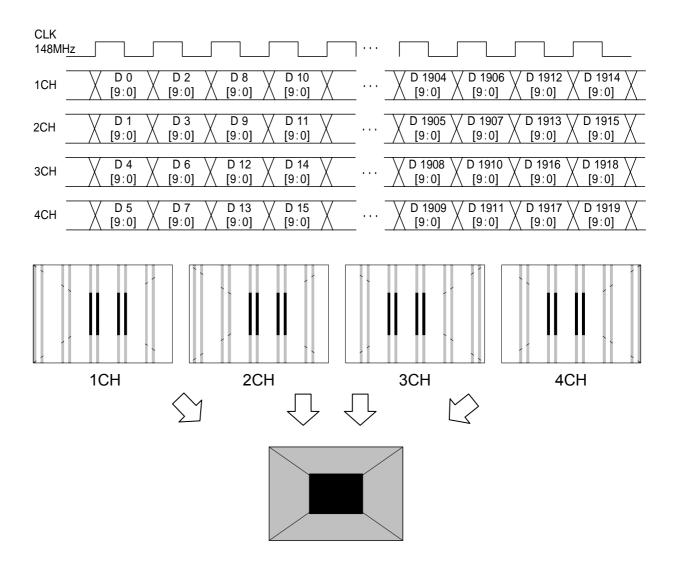


[4] MODE3 ×4 Mode (Quad Link) (Dividing Normal Mode)

Using channels 1 and 2, the right half of the image is output; similarly, using channels 3 and 4, the left half of the image is output. The pixel assignment is given below.

Given here as an example for explanatory purposes is a case where the resolution is 1920×1080 , the dot clock frequency is 592 MHz and the output gray scale is 10 bits.

The ×4 mode is an output mode designed for the inspection of flat panel devices which support the Full HD 240 Hz output. By connecting the output of the VG generator to the IA-1540 (iTMDS-LVDS converter box) and by halving the output in the converter box,

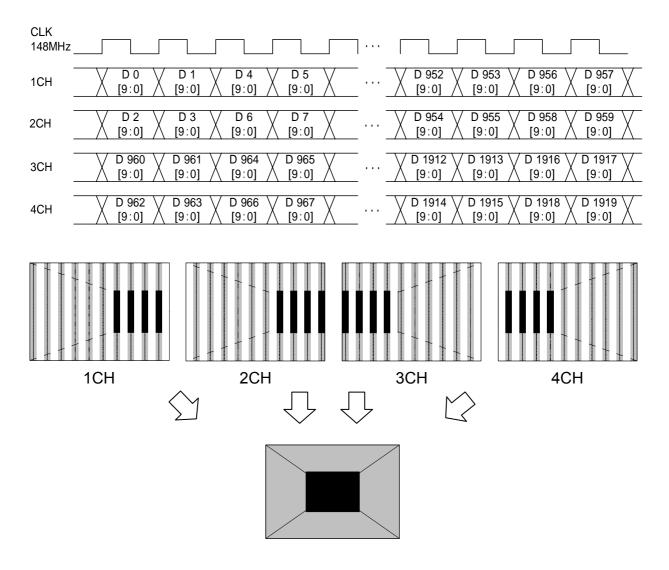



[5] MODE4 ×4 Mode (Quad Link) (Dividing Cross Mode)

Using channels 1 and 2, the right half of the image is output; similarly, using channels 3 and 4, the left half of the image is output. The pixel assignment is given below.

Given here as an example for explanatory purposes is a case where the resolution is 1920×1080 , the dot clock frequency is 592 MHz and the output gray scale is 10 bits.

The ×4 mode is an output mode designed for the inspection of flat panel devices which support the Full HD 240 Hz output. By connecting the output of the VG generator to the IA-1540 (iTMDS-LVDS converter box) and by halving the output in the converter box,

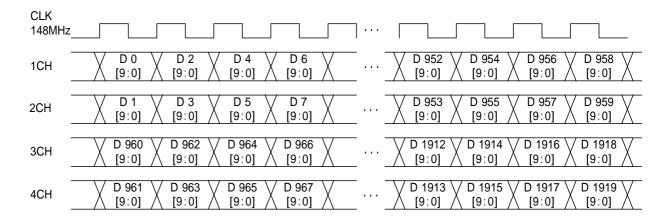

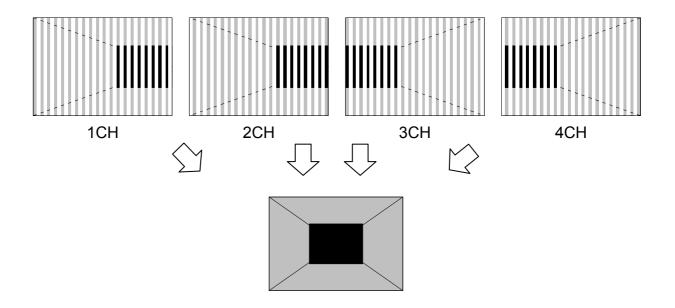

Specifications for Octal Link modes during 4K×2K 2-board mode (4K×2K 120 Hz mode) output

This mode is an output mode designed for 4K×2K 120 Hz inspections.

During the 4K×2K 2-board mode output, Dual Link equivalent to four channels is used through the use of two output boards, and one screen is produced by combining the data of eight channels.


- * Described below in this section is a case where, in relation to the first VM-1824 board (lower level), the data is output in channels 1 to 4 for the Master and Slave of Dual Link.
- * Described below in this section is a case where, in relation to the second VM-1824 board (upper level), the data is output in channels 5 to 8 for the Master and Slave of Dual Link.
- * Described below in this section is a case where, in relation to the first VM-1824-A board (lower level), the Single Link data is output as channels 1 to 4.
- * Described below in this section is a case where, in relation to the second VM-1824-A board (upper level), the Single Link data is output as channels 5 to 8.

[4K×2K 2-board 8-channel output]

[1st board output (lower level)] [2nd board output (upper level)] 1CH 5CH Link0 Link0 Link1 Link1 RGB 8-10Bit RGB 8-10Bit Dual Dual [9:0] [9:0] Link2 Link2 Link Link Master Master 1CH 1CH Connector Connector 6CH 2CH Link3 Link3 Link4 RGB 8-10Bit Link4 RGB 8-10Bit Dual Dual [9:0] [9:0] Link5 Link5 Link Link Srave Srave 3CH 7CH Link0 Link0 Link1 Link1 RGB 8-10Bit RGB 8-10Bit Dual Dual [9:0] [9:0] Link2 Link2 Link Link Master Master 2CH 2CH Connector Connector 4CH 8CH Link3 Link3 Link4 RGB 8-10Bit Link4 RGB 8-10Bit Dual Dual [9:0] [9:0] Link5 Link5 Link Link Srave Srave


[1] MODE0 (Octal Link) (screen split into 4 in the form of a square divided into 4 equal parts + screen split vertically into 2)

Channels 1 to 8 are used. The screen is split into 4 in the form of a square divided into 4 equal parts and output from each of the output boards, and then it is split vertically into two at each board, and output.

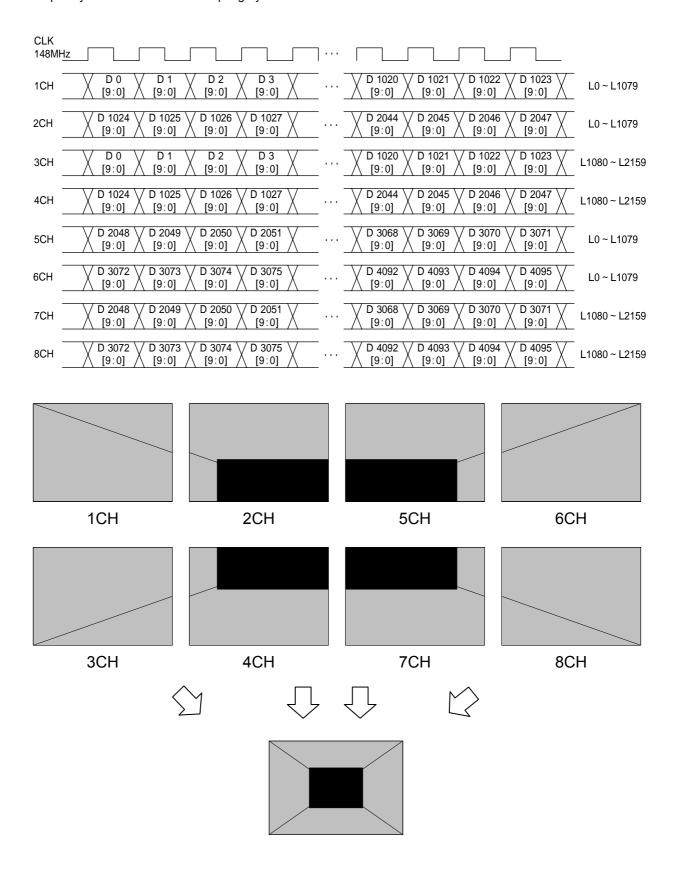


[2] MODE1 (Octal Link) (screen split vertically into 4 + screen split vertically into 2)

Channels 1 to 8 are used. The screen is split vertically into 4 and output from each of the output boards, and then it is split vertically into two at each board and output.

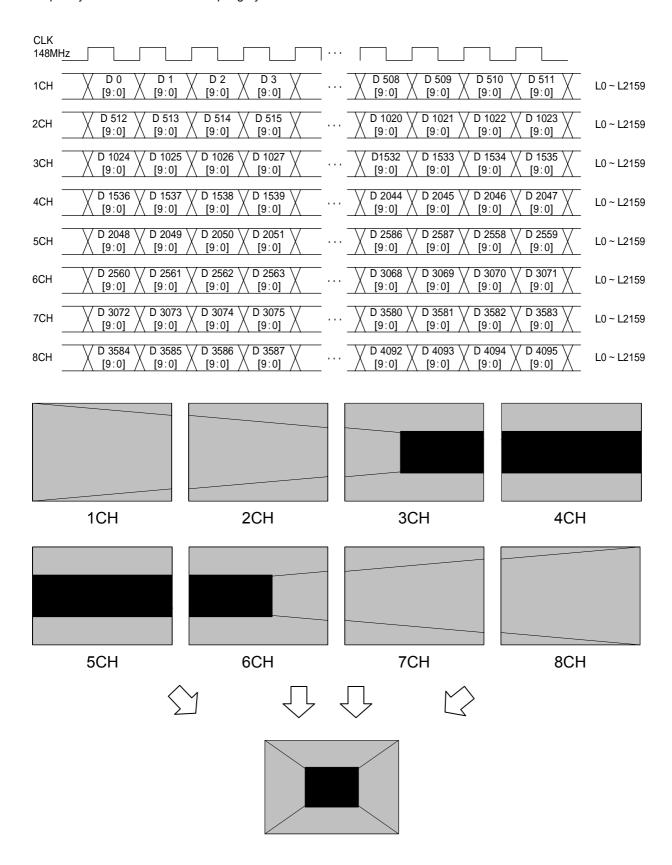


[3] MODE2 (Octal Link) (screen split horizontally into 2 + screen split vertically into 2)

Channels 1 to 8 are used. The screen is split horizontally into 2 and output from each of the output boards, and then it is split vertically into two at each board, and output.

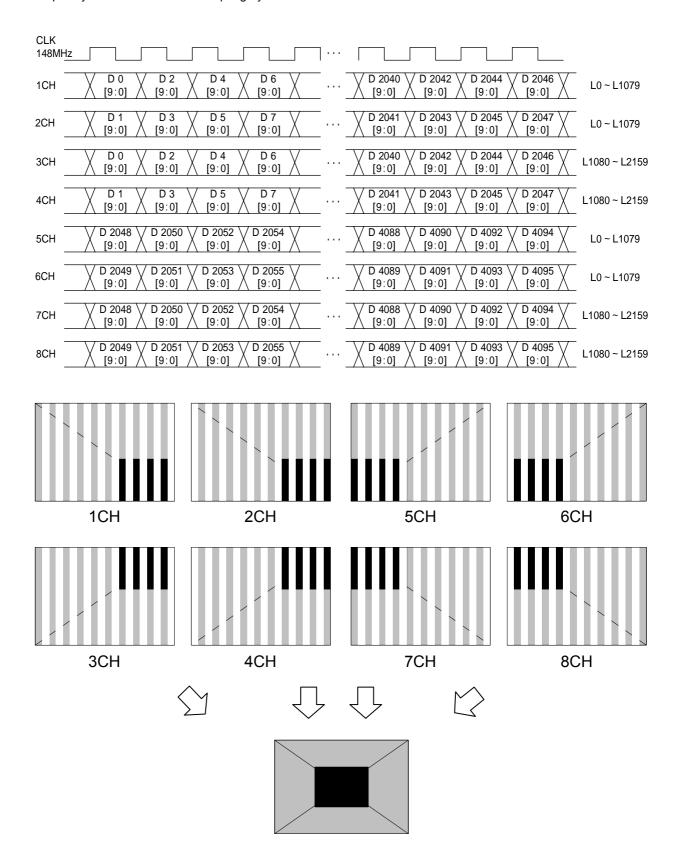

[4] MODE3 (Octal Link) (screen split vertically into 2 + screen split vertically into 2)

Channels 1 to 8 are used. The screen is split vertically into 2 and output from each of the output boards, and then it is split vertically into two at each board, and output.

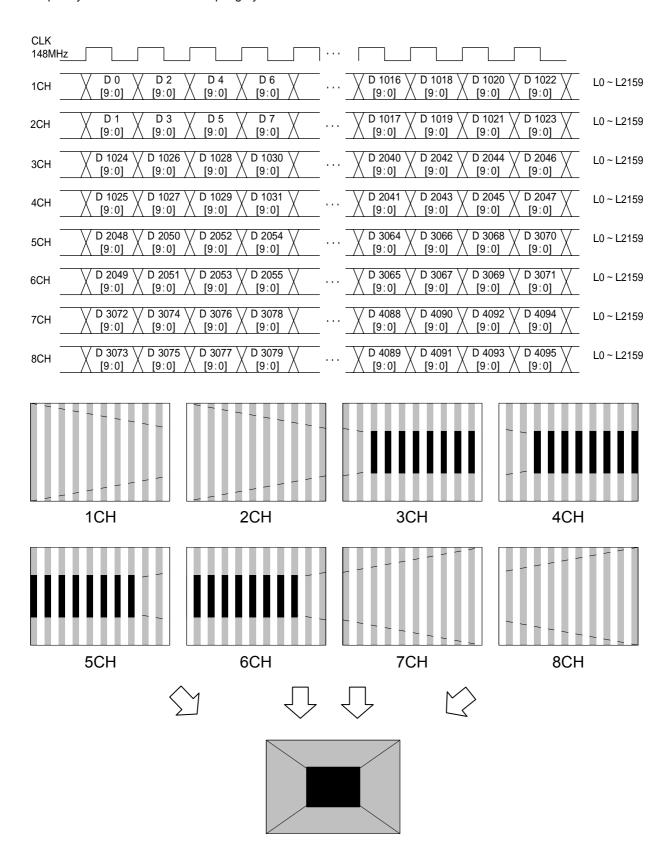

Specifications of bit assignment during 16-bit (8 + 8 bits) output

DVI multiple bit output

Sixteen bits are output by using two DVI channels and outputting the data using 8 + 8 bits.

The higher 8 bits are allocated to one channel and the lower 8 bits to the other channel.

If the setting involves 15 or fewer bits, "0" is entered for the lower bits which will not be used.

• iTMDS multiple bit output


When outputting multiple bits using the iTMDS format, select iTMDS as the output setting.

When iTMDS has been selected, the multiple-bit output mode (10 bits or 12 bits) which uses one iTMDS channel is automatically tracked in tandem with the number of output bits regardless of which bit mode was selected.

- * The 8 + 8 bit multi-channel output mode takes effect only when DVI has been selected as the output setting. If iTMDS has been selected, the multiple-bit output mode (10 bits or 12 bits) which uses one iTMDS channel is automatically tracked in tandem with the number of output bits regardless of which bit mode was selected.
- * As shown in the figure below, what is output as the data of channels 1 to 4 for the Master and Slave of Dual Link of VM-1824 is described in this section.
- * Also described below in this section is the Single Link data of the VM-1824-A which is output as the data of channels 1 to 4.

[16-bit (8+8) output Single Link]

[16-bit (8+8) output Dual Link]

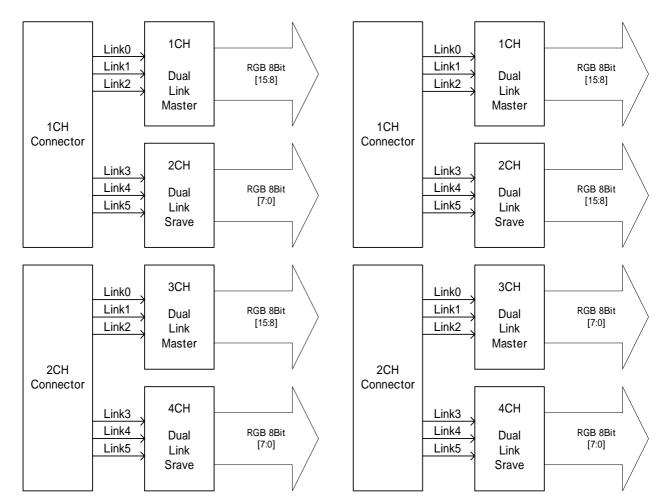


[1] 16Bit (Single Link)


Sixteen-bit images are output using the channel 1 of the Master paired up with the channel 1 of the Slave.


The higher 8 bits are output to channel 1 of the Master and the lower 8 bits to channel 1 of the Slave.


Also, the 16-bit images are output using channel 2 of the Master paired up with channel 2 of the Slave.


The higher 8 bits are output to channel 2 of the Master and the lower 8 bits to channel 2 of the Slave.

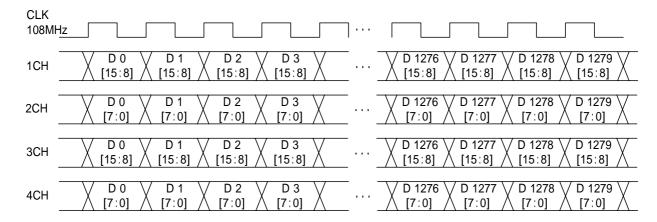










[2] 16Bit (Dual Link)


Dual Link images are output using channel 1 of the Master paired up with channel 1 of the Slave.


The higher 8 bits are output to channel 1.


Also, the Dual Link images are output using the 2-channel of the Master paired up with the 2-channel of the Slave.


The lower 8 bits are output to channel 2.

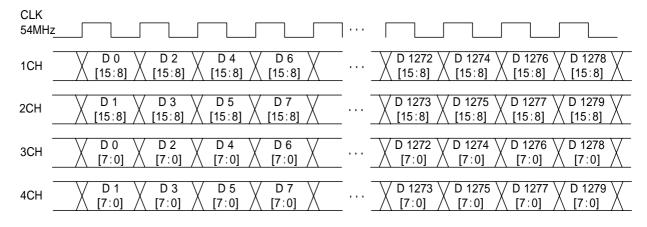










4.4.4 Sync signal polarity settings

For the detailed setting procedure, refer to "4.1.2 Setting the sync signals to ON or OFF and setting the sync signal polarities."

4.5 LVDS

4.5.1 Connectors and pin assignments

Connector: MDR 10226-1210-VE made by 3M



Pin no.	Signal	Pin no.	Signal
1	GND	14	TA-
2	TAG	15	TA+
3	Reserve (leave this unconnected)	16	GND
4	TB-	17	TBG
5	TB+	18	Reserve (leave this unconnected)
6	TC-	19	TCG
7	TC+	20	TE-
8	TEG	21	TE+
9	Reserve (leave this unconnected)	22	TCLK-
10	TCLKG	23	TCLK+
11	+5 V/+3.3 V (DDC power supply *1)	24	+5 V/+3.3 V (DDC power supply *1)
12	TD-	25	TDG
13	TD+	26	GND

^{*1:} Restrictions apply to the supply current of the DDC power supply. Refer to "12.3 Concerning the maximum current consumption of the DDC (DP_PWR) power supply."

4.5.2 LVDS setting procedure

Some LVDS settings are established for each set of program data, and other LVDS settings are based on the device settings.

Settings established for each set of program data

(1)	Select Program Edit using SET or and then press .	MENU Pro9ram Edit Pro9ram Name : ▶EIA1920x1080Pa60 Timin9 (TIM) OutPut (TIM) Audio (TIM) Pattern (PAT)
(2)	Select Output (TIM) using or or or or and then press .	MENU OutPut All OutPut Analos OutPut Disital OutPut VBI Function OutPut OutPut
(3)	Select Digital Output using or	MENU Digital OutPut DVI
(4)	Select LVDS using or or or and then press.	MENU LVDS OutPut 1,2ch(0/1): ▶ON
(5)	Select the items using or or or or and then press .	For further details on the parameters, refer to the table below.
	Select the parameters using or □ or	

<LVDS setting parameters selected for each set of program data>

(1)	Output 1,2ch (0/1)	Th	is sets On or Off for each	channel		
(1)	Output 3,4ch (0/1)	The same settings as the ones described in "4.1.1 Setting the output				
			interfaces to ON or OFF" can also be established.			
		0	Off	No output.		
		1	On	Output.		
(2)	Mode (0/1)	This sets the bit length and link format of the images to be output from LVI A setting which is independent of the bit length for pattern drawing can be selected. It is also possible to select the bit length automatically. The porticity which the bit length for pattern drawing exceeds the bit length which has been set here is discarded. A deficient portion is filled with zeros. "Quad" can be selected when the dot clock frequency ranges from 80 MHz 340 MHz, and data can be output. "Dual" can be selected when the dot clock frequency ranges from 40 MHz 270 MHz, and data can be output. "Single" can be selected when the dot clock frequency ranges from 20 Mto 135 MHz, and data can be output. "4.1.5 Setting the bit length (gray scale) for pattern drawing"				
			O Single (10 bits) The data is output by Single Link from out channel 1. The portion by which the bit len pattern drawing exceeds 10 bits is discard. The same data as for output channel 1 is from output channels 2, 3 and 4.			
		1 Dual (10 bits) The data is output by Dual Link from output channels 1 and 2. The portion by which the length for pattern drawing exceeds 10 bits discarded. The same data as for output channels 1 and 2 is output from output chan 3 and 4.				
		2	Quad (10 bits)	The data is output by Quad Link from output channels 1, 2, 3 and 4. The portion by which the bit length for pattern drawing exceeds 10 bits is discarded.		
		3	Single (16 bits)	The data is output by Single Link from output channels 1 and 2. The portion by which the bit length for pattern drawing is deficient from 16 bits length is filled with zeros. The same data as for output channels 1 and 2 is output from output channels 3 and 4.		
		4	Dual (16 bits)	The data is output by Quad Link from output channels 1, 2, 3 and 4. The portion by which the bit length for pattern drawing is deficient from 16 bits length is filled with zeros.		
		5	Single (Auto)	The data is output by Single Link. Single (10 bits) or Single (16 bits) is automatically selected depending on the bit length for pattern drawing.		
		6	Dual (Auto)	The data is output by Dual Link. Dual (10 bits) or Dual (16 bits) is automatically selected depending on the bit length for pattern drawing.		
(3)	Split	This splits the images to be output, and sets channels 1, 2, 3 and 4 as the output channels. When a setting other than Normal is selected, all other outputs are shut down.				
		The setting below can be selected only when the Single (10 bits) mode has been set.				
		The setting below can be selected only when the Single (16 bits) mode has been set.				
		0 Normal				
		The setting below can be selected only when the Single (Auto) mode has been set.				
l	1	0 Normal				

	1				
		The setting below can be selected only when the Dual (10 bits) mode has been set.			
		0	Normal		
		1	2Split		
		Th	e setting below can be se	elected only when the Dual (16 bits) mode has	
		be	en set.		
		0	Normal		
		1	2Split		
		1	•	elected only when the Dual (Auto) mode has	
			en set.		
		0	Normal		
		1	2Split		
		The setting below can be selected only when the Quad (10 bits) me			
		be 0	en set.		
			Normal		
		1	2Split		
		2	· • • · •		
(4)	Bit Assign (0-4)		This selects the bit assignment.		
				when "refer Program" has been selected as the	
		Bit Assign setting among the device settings. For further details, refer to "4.5.4 Bit assignment."			
		0	SAMPLE1 (DISM)	Based on the DISM standard.	
		1	SAMPLE2 (OLDI)	Based on the OpenLDI standard.	
		These are set by the user.			
		3	User1 User2	* The actual bit assignment is set using the	
		4	User3	SP-8870 software program which is provided	
		4	USers	with the VG generator.	
(5)	CTL1 1,2ch (0/1)	This is not normally used. Keep it at the low setting.			
(6)	CTL2 1,2ch (0/1)	This is not normally used. Keep it at the low setting.			
(7)	CTL1 3,4ch (0/1)	This is not normally used. Keep it at the low setting.			
(8)	CTL2 3,4ch (0/1)	This is not normally used. Keep it at the low setting.			

Settings common to all programs (device settings)

(1)	Select Configuration using or or and then press.	MENU Configuration General SON
(2)	Select LVDS using or or or and then press.	MENU LVDS Bit Assi9n (0-5): ▶SAMPLE1(DISM) User Bit Assi9n WultiBitMode(0/1): 8+8 bit S
(3)	Select the items using or or , and then press .	For further details on the parameters, refer to the table below.
	Select the parameters using or	

<LVDS setting parameters in the device settings>

(1)	Bit Assign (0-5)	This selects the bit assignment.				
		For further details, refer to "4.5.4 Bit assignment."				
		0	O SAMPLE1 (DISM) Based on the DISM standard.			
		1	SAMPLE2 (OLDI) Based on the OpenLDI standard.			
		2	User1 These are set by the user.			
		3	User2			
		4	4 User3			
		5	5 refer Program The bit assignment accords with the program settings.			
(2)	User Bit Assign	This displays the bit assignment of the user settings.				
		* To edit this parameter, use the SP-8870 software program which is provided with the VG generator.				
(3)	Multi Bit Mode (0/1)	This selects the bit assignment to be used when two output connectors are				
		used.				
		For further details, refer to "4.5.4 Bit assignment."				
		0	8+8 bit			
		1	1 10+6 bit			

4.5.3 Data transfer system


Settings (1) to (6) in the table below are available as the data transfer system settings.


Item	Description	Output from other units			
Setting (1)	What is drawn is output as is. (Same output for channels 1 to 4)	ON			
Setting (2)	Setting (2) The data is output dot by dot to channels 1 and 2. (Same output for channels 3 and 4)				
Setting (3)	The data is output dot by dot to channels 1, 3, 2 and 4.	ON			
Setting (4)	The left half of the screen is output to channel 1, and the right half of the screen is output to channel 2. (Same output for channels 3 and 4)	OFF			
Setting (5)	One-fourth of the screen each is output to channels 1, 3, 2 and 4 in this order.	OFF			
Setting (6)	The left half of the screen is output to channels 1 and 3, and the right half of the screen is output to channels 2 and 4.	OFF			


<Specifications for outputs of 8 to 10 bits>


Setting (1) [Single (10 bits)], [Normal]


The same image is output to all four channels. The output gray scale is 8 to 10 bits.

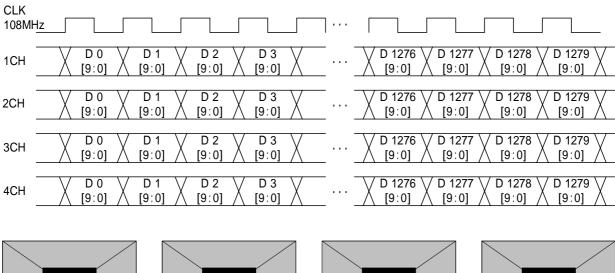










Setting (2) [Dual (10 bits)], [Normal]

The images are output with channels 1 and 2 forming one set and channels 3 and 4 forming another set.


The output gray scale is 8 to 10 bits.

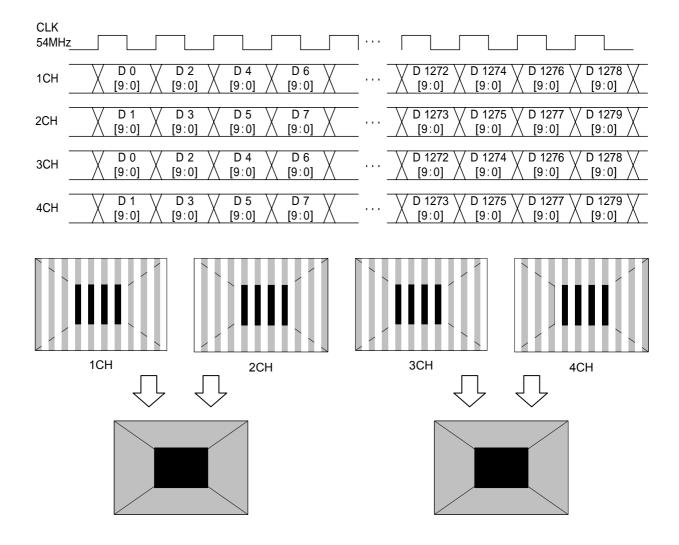

Setting (3) [Quad (10 bits)], [Normal]

The images are output to channels 1, 2, 3 and 4 in this order.


The output gray scale is 8 to 10 bits.

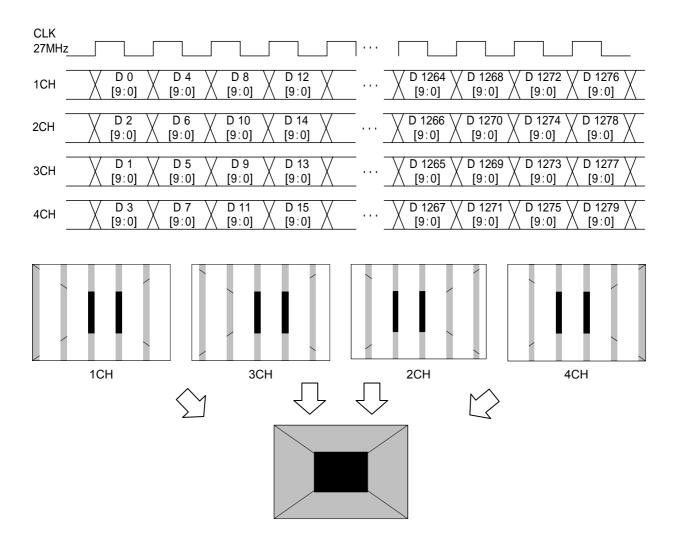

Setting (4) [Dual (10 bits)], [2 split]

The images are output with channels 1 and 2 forming one set and channels 3 and 4 forming another set. If this is described with the channel 1 and 2 set used as an example, the left half of the image is allocated and output to channel 1, and the right half of the image is allocated and output to channel 2.


The output gray scale is 8 to 10 bits.

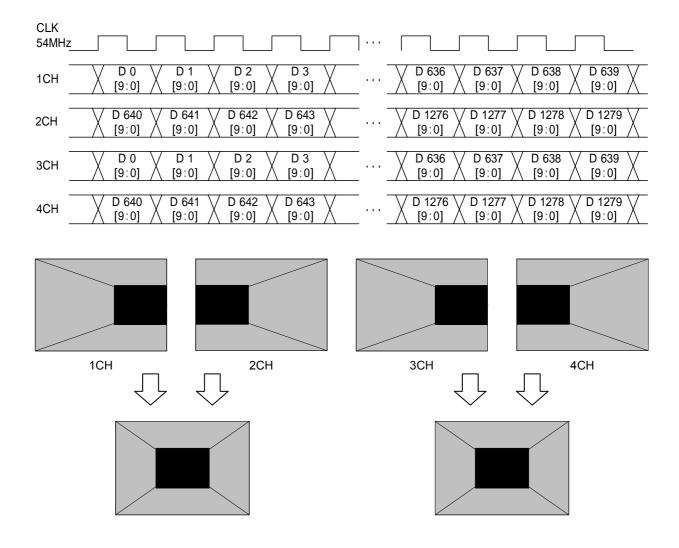

Setting (5) [Quad (10 bits)], [4 split]

The images are split into four parts horizontally, and allocated from the left to channels 1, 3, 2 and 4 in this order.


The output gray scale is 8 to 10 bits.

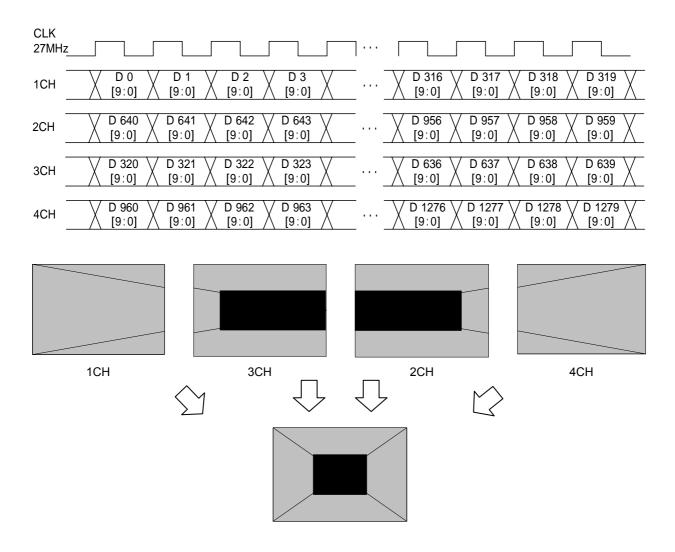

Setting (6) [Quad (10 bits)], [2 split]

The images are output with channels 1 and 3 forming one set and channels 2 and 4 forming another set. The left half of the image is allocated and output to the channel 1 and 3 set, and the right half of the image is allocated to the channel 2 and 4 set.

The output gray scale is 8 to 10 bits.

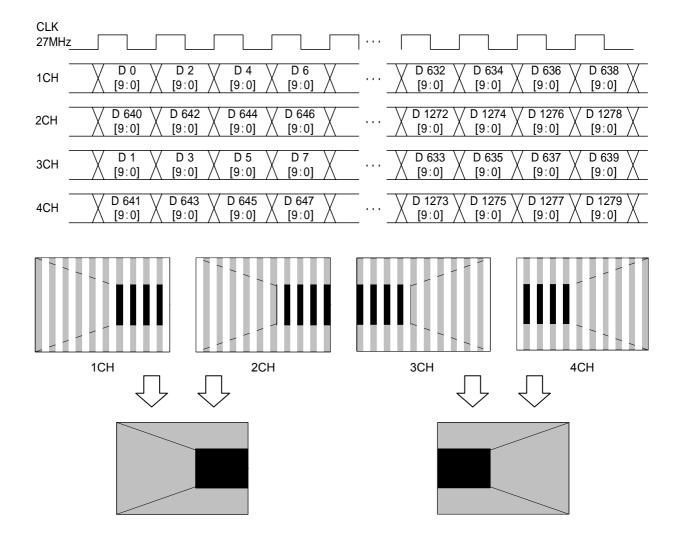


<Specifications for outputs of 11 to 16 bits>

With outputs of 11 to 16 bits, 8 to 10 bits are treated as one output by the channel 1 and 2 set. The bits can be allocated in two ways as shown below. However, when Single (Auto) or Dual (Auto) has been set as the LVDS setting parameter mode, automatic switching is initiated to the channel 1 output for bits 8 to 10 and to the channel 2 output for bits 11 to 16.

When Single (10 bits), Dual (10 bits) or Quad (10 bits) has been set as the setting parameter mode, output is fixed from channel 1.

When Single (16 bits) or Dual (16 bits) has been set as the setting parameter mode, output is fixed from channel 2.

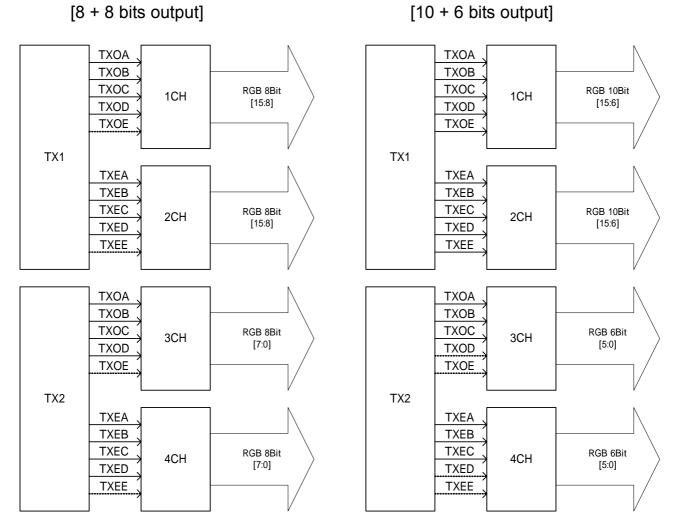


- *1: The signal lines indicated by the dotted lines in the above figure are not used.
- *2: The specification for 8 + 8 bits output is the default setting.


Setting (1) [Single (16 bits)], [Normal], configuration [10 + 6 bits]


The 16-bit images are output with channels 1 and 3 forming one set and channels 2 and 4 forming another set.


The 10 upper bits are output to channels 1 and 2, and the 6 lower bits are output to channels 3 and 4.


The example given here describes a case where the resolution is 1280×1024 , the dot clock frequency is 108 MHz, 16 bits apply for the gray scale, 10 bits are output to channel 1 and 6 bits are output to channel 2.

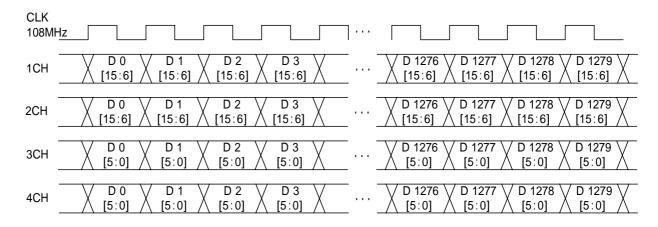










Setting (2) [Dual (16 bits)], [Normal], configuration [10 + 6 bits]

With channels 1 and 3 forming one set and channels 2 and 4 forming another set, odd-numbered fields are output using one set and even-numbered fields are output using the other set.

The 10 upper bits are output to channels 1 and 2, and the remaining 6 lower bits are output to channels 3 and 4.

The example given here describes a case where the resolution is 1280 × 1024, the dot clock frequency is 108 MHz, 16 bits apply for the gray scale, 10 bits are output to channel 1 and 6 bits are output to channel 2.

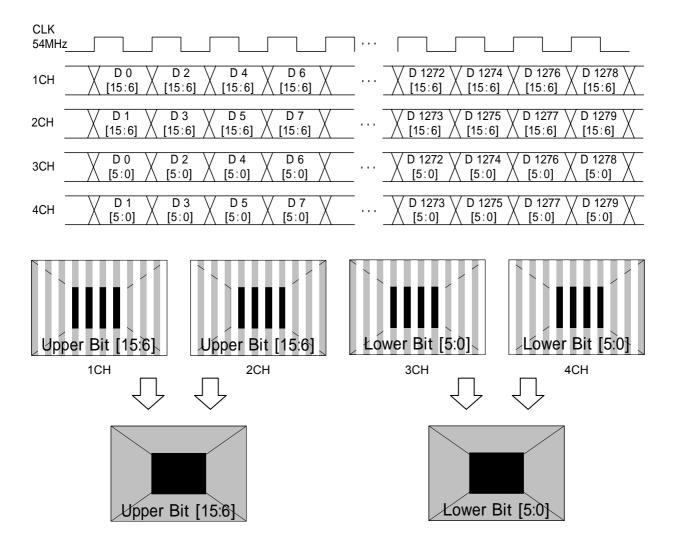


Setting (3) [Dual (16 bits)], [2 split], configuration [10 + 6 bits]

With channels 1 and 3 forming one set and channels 2 and 4 forming another set, the left half of the image is output using one set and the right half of the image is output using the other set.

The 10 upper bits are output to channels 1 and 2, and the remaining 6 lower bits are output to channels 3 and 4.

The example given here describes a case where the resolution is 1280 × 1024, the dot clock frequency is 108 MHz, 16 bits apply for the gray scale, 10 bits are output to channel 1 and 6 bits are output to channel 2.

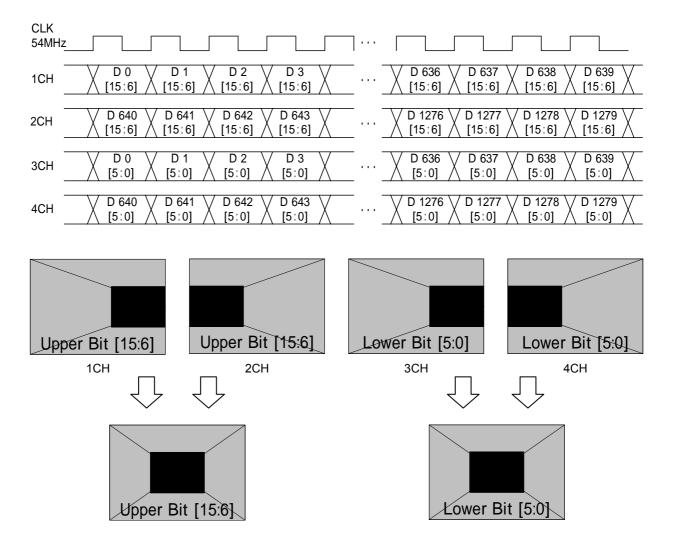



Setting (4) [Single (16 bits)], [Normal], configuration [8 + 8 bits]


The 16-bit images are output with channels 1 and 3 forming one set and channels 2 and 4 forming another set.


The 8 upper bits are output to channels 1 and 2, and the 8 lower bits are output to channels 3 and 4.


The example given here describes a case where the resolution is 1280×1024 , the dot clock frequency is 108 MHz, 16 bits apply for the gray scale, 8 bits are output to channel 1 and 8 bits are output to channel 2.

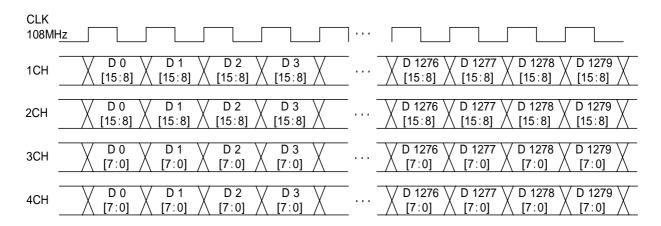










Setting (5) [Dual (16 bits)], [Normal], configuration [8 + 8 bits]

With channels 1 and 3 forming one set and channels 2 and 4 forming another set, odd-numbered fields are output using one set and even-numbered fields are output using the other set.

The 8 upper bits are output to channels 1 and 2, and the 8 lower bits are output to channels 3 and 4.

The example given here describes a case where the resolution is 1280×1024 , the dot clock frequency is 108 MHz, 16 bits apply for the gray scale, 8 bits are output to channel 1 and 8 bits are output to channel 2.

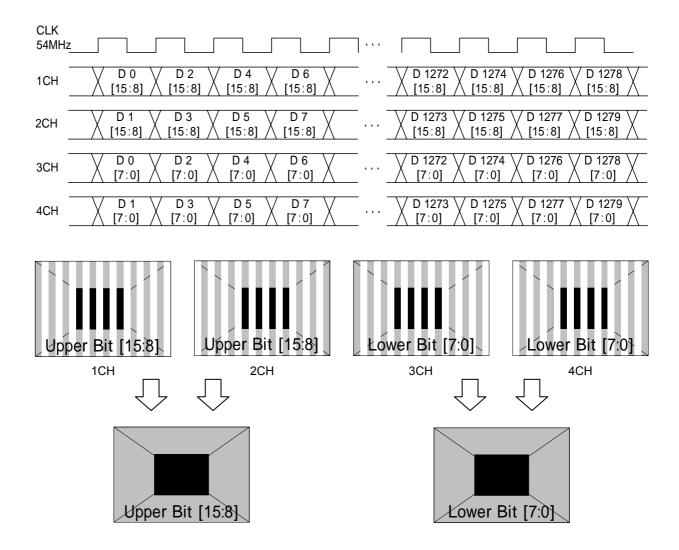


Setting (6) [Dual (16 bits)], [2 split], configuration [8 + 8 bits]

With channels 1 and 3 forming one set and channels 2 and 4 forming another set, the left half of the image is output using one set and the right half of the image is output using the other set.

The 8 upper bits are output to channels 1 and 2, and the remaining 8 lower bits are output to channels 3 and 4.

The example given here describes a case where the resolution is 1280 × 1024, the dot clock frequency is 108 MHz, 16 bits apply for the gray scale, 8 bits are output to channel 1 and 8 bits are output to channel 2.

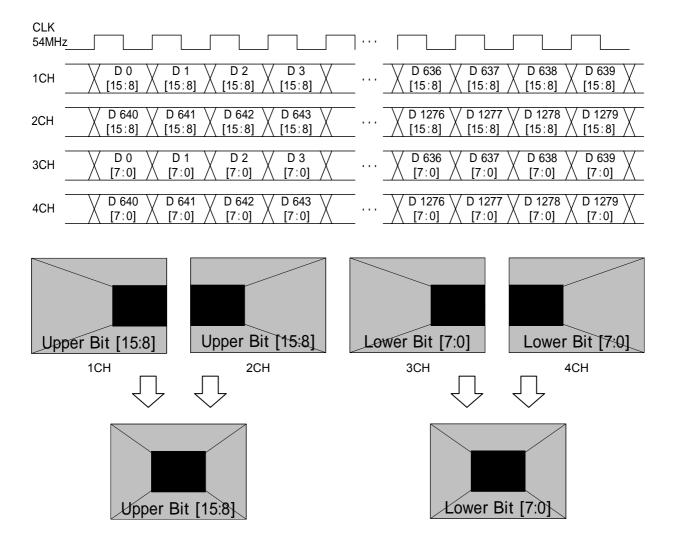

4.5.4 Bit arrays

Included among the bit arrays are SAMPLE1 (DISM standard type), SAMPLE2 (OpenLDI standard type) and USER (1 to 3) which can be set as desired by users.

For the setting procedure, refer to "4.5.2 LVDS setting procedure."

Bit arrays for 8 to 10 bits when using one output connector

Operation signal	Data No.	8-bit mode			10-bit mode	10-bit mode		
		SAMPLE1 (DISM)	SAMPLE2 (OpenLDI)	USER	SAMPLE1 (DISM)	SAMPLE2 (OpenLDI)	USER	
TA	TA0	R2	R0	R (X)	R4	R0	R (X)	
	TA1	R3	R1	R (X)	R5	R1	R (X)	
	TA2	R4	R2	R (X)	R6	R2	R (X)	
	TA3	R5	R3	R (X)	R7	R3	R (X)	
	TA4	R6	R4	R (X)	R8	R4	R (X)	
	TA5	R7	R5	R (X)	R9	R5	R (X)	
	TA6	G2	G0	G (X)	G4	G0	G (X)	
ТВ	TB0	G3	G1	G (X)	G5	G1	G (X)	
	TB1	G4	G2	G (X)	G6	G2	G (X)	
	TB2	G5	G3	G (X)	G7	G3	G (X)	
	TB3	G6	G4	G (X)	G8	G4	G (X)	
	TB4	G7	G5	G (X)	G9	G5	G (X)	
	TB5	B2	B0	B (X)	B4	B0	B (X)	
	TB6	B3	B1	B (X)	B5	B1	B (X)	
TC	TC0	B4	B2	B (X)	B6	B2	B (X)	
	TC1	B5	B3	B (X)	B7	B3	B (X)	
	TC2	B6	B4	B (X)	B8	B4	B (X)	
	TC3	B7	B5	B (X)	B9	B5	B (X)	
	TC4	HS	HS	HS	HS	HS	HS	
	TC5	VS	VS	VS	VS	VS	VS	
	TC6	DE	DE	DE	DE	DE	DE	
TD	TD0	R0	R6	R (X)	R2	R6	R (X)	
	TD1	R1	R7	R (X)	R3	R7	R (X)	
	TD2	G0	G6	G (X)	G2	G6	G (X)	
	TD3	G1	G7	G (X)	G3	G7	G (X)	
	TD4	B0	B6	B (X)	B2	B6	B (X)	
	TD5	B1	B7	B (X)	B3	B7	B (X)	
	TD6	L	L	L	L	L	L	
TE	TE0	L	L	L	R0	R8	R (X)	
	TE1	L	L	L	R1	R9	R (X)	
	TE2	L	L	L	G0	G8	G (X)	
	TE3	L	L	L	G1	G9	G (X)	
	TE4	L	L	L	B0	B8	B (X)	
	TE5	L	L	L	B1	B9	B (X)	
	TE6	L	L	L	L	L	L	

^{*} In the 9-bit mode, the nine bits are positioned with the least significant bit applying in the 10-bit mode discarded and the bits justified upward.

Bit arrays for 8 to 16 bits when using two output connector Config setting: MultiBitMode/8+8 Bit

Operation signal	Data No.	8- to 16-bit mode							
		SAMPLE1		SAMPLE2		USER			
		(DISM)		(OpenLDI)					
		CH1,CH2	CH3,CH4	CH1,CH2	CH3,CH4	CH1,CH2	CH3,CH4		
TA	TA0	R10	R2	R8	R0	R (X)	R (X)		
	TA1	R11	R3	R9	R1	R (X)	R (X)		
	TA2	R12	R4	R10	R2	R (X)	R (X)		
	TA3	R13	R5	R11	R3	R (X)	R (X)		
	TA4	R14	R6	R12	R4	R (X)	R (X)		
	TA5	R15	R7	R13	R5	R (X)	R (X)		
	TA6	G10	G2	G8	G0	G (X)	G (X)		
ТВ	TB0	G11	G3	G9	G1	G (X)	G (X)		
	TB1	G12	G4	G10	G2	G (X)	G (X)		
	TB2	G13	G5	G11	G3	G (X)	G (X)		
	TB3	G14	G6	G12	G4	G (X)	G (X)		
	TB4	G15	G7	G13	G5	G (X)	G (X)		
	TB5	B10	B2	B8	B0	B (X)	B (X)		
	TB6	B11	B3	B9	B1	B (X)	B (X)		
TC	TC0	B12	B4	B10	B2	B (X)	B (X)		
	TC1	B13	B5	B11	B3	B (X)	B (X)		
	TC2	B14	B6	B12	B4	B (X)	B (X)		
	TC3	B15	B7	B13	B5	B (X)	B (X)		
	TC4	HS	HS	HS	HS	HS	HS		
	TC5	VS	VS	VS	VS	VS	VS		
	TC6	DE	DE	DE	DE	DE	DE		
TD	TD0	R8	R0	R14	R6	R (X)	R (X)		
	TD1	R9	R1	R15	R7	R (X)	R (X)		
	TD2	G8	G0	G14	G6	G (X)	G (X)		
	TD3	G9	G1	G15	G7	G (X)	G (X)		
	TD4	B8	B0	B14	B6	B (X)	B (X)		
	TD5	B9	B1	B15	B7	B (X)	B (X)		
	TD6	L	L	L	L	L	L		
TE	TE0	L	L	L	L	L	L		
	TE1	L	L	L	L	L	L		
	TE2	L	L	L	L	L	L		
	TE3	L	L	L	L	L	L		
	TE4	L	L	L	L	L	L		
	TE5	L	L	L	L	L	L		
	TE6	L	L	L	L	L	L		

^{*} With a bit width less than a 16-bit width, the bits are positioned with the less significant bits discarded and the bits justified upward.

Bit arrays for 8 to 16 bits when using two output connector
 Config setting: MultiBitMode/10+6 Bit


Operation signal	Data No.	8- to 16-bit mode							
		SAMPLE1		SAMPLE1		USER			
		(DISM)		(OpenLDI)	T				
		CH1,CH2	CH3,CH4	CH1,CH2	CH3,CH4	CH1,CH2	CH3,CH4		
TA	TA0	R10	R0	R6	R0	R (X)	R (X)		
	TA1	R11	R1	R7	R1	R (X)	R (X)		
	TA2	R12	R2	R8	R2	R (X)	R (X)		
	TA3	R13	R3	R9	R3	R (X)	R (X)		
	TA4	R14	R4	R10	R4	R (X)	R (X)		
	TA5	R15	R5	R11	R5	R (X)	R (X)		
	TA6	G10	G0	G6	G0	G (X)	G (X)		
ТВ	TB0	G11	G1	G7	G1	G (X)	G (X)		
	TB1	G12	G2	G8	G2	G (X)	G (X)		
	TB2	G13	G3	G9	G3	G (X)	G (X)		
	TB3	G14	G4	G10	G4	G (X)	G (X)		
	TB4	G15	G5	G11	G5	G (X)	G (X)		
	TB5	B10	В0	B6	В0	B (X)	B (X)		
	TB6	B11	B1	B7	B1	B (X)	B (X)		
TC	TC0	B12	B2	B8	B2	B (X)	B (X)		
	TC1	B13	B3	B9	В3	B (X)	B (X)		
	TC2	B14	B4	B10	B4	B (X)	B (X)		
	TC3	B15	B5	B11	B5	B (X)	B (X)		
	TC4	HS	HS	HS	HS	HS	HS		
	TC5	VS	VS	VS	VS	VS	VS		
	TC6	DE	DE	DE	DE	DE	DE		
TD	TD0	R8	L	R12	L	R (X)	L		
	TD1	R9	L	R13	L	R (X)	L		
	TD2	G8	L	G12	L	G (X)	L		
	TD3	G9	L	G13	L	G (X)	L		
	TD4	B8	L	B12	L	B (X)	L		
	TD5	В9	L	B13	L	B (X)	L		
	TD6	L	L	L	L	L	L		
TE	TE0	R6	L	R14	L	R (X)	L		
	TE1	R7	L	R15	L	R (X)	L		
	TE2	G6	L	G14	L	G (X)	L		
	TE3	G7	L	G15	Ī	G (X)	L		
	TE4	B6	L	B14	Ī	B (X)	L		
	TE5	B7	L	B15	Ī	B (X)	L		
	TE6	L	L	L	L	L	L		

^{*} With a bit width less than a 16-bit width, the bits are positioned with the less significant bits discarded and the bits justified upward.

4.6 Parallel

4.6.1 Connectors and pin assignments

• Connector: 68-pin MINI D (half-pitch pin type)

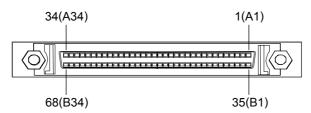

CH1					CH2										
No.	Signal														
1	(GND)	18	VCC	35	RA0	52	VCC	1	(GND)	18	VCC	35	RB0	52	VCC
2	(GND)	19	GND	36	RA1	53	GND	2	(GND)	19	GND	36	RB1	53	GND
3	(GND)	20	GND	37	RA2	54	GND	3	(GND)	20	GND	37	RB2	54	GND
4	(GND)	21	(GND)	38	RA3	55	HS0	4	(GND)	21	(GND)	38	RB3	55	SW2
5	(GND)	22	(GND)	39	RA4	56	VS0	5	(GND)	22	(GND)	39	RB4	56	SW3
6	(GND)	23	(GND)	40	RA5	57	DISP0	6	(GND)	23	(GND)	40	RB5	57	DISP1
7	(GND)	24	(GND)	41	RA6	58	SW0	7	(GND)	24	(GND)	41	RB6	58	SW1
8	(GND)	25	(GND)	42	RA7	59	BA0	8	(GND)	25	(GND)	42	RB7	59	BB0
9	(GND)	26	(GND)	43	GA0	60	BA1	9	(GND)	26	(GND)	43	GB0	60	BB1
10	(GND)	27	(GND)	44	GA1	61	BA2	10	(GND)	27	(GND)	44	GB1	61	BB2
11	(GND)	28	(GND)	45	GA2	62	BA3	11	(GND)	28	(GND)	45	GB2	62	BB3
12	(GND)	29	(GND)	46	GA3	63	BA4	12	(GND)	29	(GND)	46	GB3	63	BB4
13	(GND)	30	(GND)	47	GA4	64	BA5	13	(GND)	30	(GND)	47	GB4	64	BB5
14	(GND)	31	(GND)	48	GA5	65	BA6	14	(GND)	31	(GND)	48	GB5	65	BB6
15	(GND)	32	(GND)	49	GA6	66	BA7	15	(GND)	32	(GND)	49	GB6	66	BB7
16	(GND)	33	GND	50	GA7	67	GND	16	(GND)	33	GND	50	GB7	67	GND
17	VCC	34	(GND)	51	VCC	68	CLK	17	VCC	34	(GND)	51	VCC	68	CLK

4.6.2 Parallel data setting procedure

Parallel data setting procedure

(1)	Select Program Edit using or or and then press.	MENU Pro9ram Edit Pro9ram Name : ▶EIA1920x1080Pa60 Timin9 (TIM)
(2)	Select Output (TIM) using or or or or or and then press.	MENU OutPut All OutPut Analos OutPut DiSital OutPut VBI Function OutPut OutPut
(3)	Select Digital Output using or	MENU DiSital OutPut DVI
(4)	Select Parallel using or	MENU Parallel 1ch >>> 2ch >>> Mode (0-3): Sin9le(Auto) Polarity CLK (0/1): Posi HD (0/1): Ne9a
(5)	Select the items using or $\stackrel{\triangle \text{INC}}{\longrightarrow} \stackrel{\nabla \text{DEC}}{\longrightarrow}$, and then press $\stackrel{\text{SET}}{\longrightarrow}$.	For further details on the parameters, refer to the table below.
	Select the parameters using or	

* The output voltage level can be changed by setting the switch on the video unit (installed on the rear panel of the generator).

For further details on setting procedure, refer to "11.1.7 PARALLEL unit."

Parallel data setting parameters

(1)	1ch	lu.					
(1)	TCH		MENU 1ch Output AII (0/1): INI				
			DATA (0/1): ON CLK (0/1): ON Sync (0/1): ON Power (0/1): ON				
		Οι	utput All				
		0	OFF				
		1	ON				
			DATA				
		0	Hiz	This sets the parallel data to the high-impedance (HiZ) state.			
		1	ON	This outputs the parallel data.			
			CLK				
		0	Hiz	This sets the CLK signal to the high-impedance (HiZ) state.			
		1	ON	This outputs the parallel clock signal.			
			Sync				
		0	Hiz	This sets the parallel clock signal to the high-impedance (HiZ) state.			
		1	ON	This outputs the parallel clock signal.			
			Power				
		0	Hiz	This sets the parallel power supply to the high-impedance (HiZ) state.			
		1	ON	This outputs the parallel power. For further details on the settings, refer to "1.5.6 Parallel unit"			
			SW				
		0	cs	CS output from SW			
		1	VD	VD output from SW			
		2	HD	HD output from SW			
		3	Low	Fix SW to Low			
		4	High	Fix SW to High			
(2)	2ch	The settings from Output to Power are the same as for channel 1.					
			SW1				
		0	cs	CS output from SW1			
		1	VD	VD output from SW1			
		2	HD	HD output from SW1			
		3	Low	Fix SW1 to Low			
		4	High	Fix SW1 to High			
			SW2				
		0	HS	HS output from SW2			
		1	VD	VD output from SW2			
		2	HD	HD output from SW2			
		3	Low	Fix SW2 to Low			
		4	High	Fix SW2 to High			
			SW3	I			
		0	VS	VS output from SW3			
		1	VD	VD output from SW3			
		2	HD	HD output from SW3			
		3	Low	Fix SW3 to Low			
		4	High	Fix SW3 to High			

(3)	Mode (0/1)			d link format of the images to be output from the					
		parallel connector. A setting which is independent of the bit length for pattern drawing can be selected. It is also possible to select the bit length automatically. The portion by which the bit length for pattern drawing exceeds the bit length which has been set here is discarded. A deficient portion is filled with zeros.							
				when the dot clock frequency ranges from 0.1 MHz					
			100 MHz, and the data	can be output. hen the dot clock frequency ranges from 0.2 MHz to					
			200 MHz, and the data can be output.						
		"4.1.5 Setting the bit length (gray scale) for pattern drawing"							
		0	Single (8 bits)	The data is output by Single Link from output channel 1. The portion by which the bit length for pattern drawing exceeds 8 bits is discarded. The same data as for output channel 1 is output for channel 2.					
		1	Dual (8 bits)	The data is output by Dual Link from output channels 1 and 2. The portion by which the bit length for pattern drawing exceeds 8 bits is discarded.					
		2	Single (16 bits)	The data is output by Single Link from output channels 1 and 2. The portion by which the bit length for pattern drawing is deficient from 16 bits is discarded.					
		3	Single (Auto)	The data is output by Single Link. Single (10 bits) or Single (16 bits) is automatically selected depending on the bit length for pattern drawing.					
(4)	Polarity CLK (0/1)	Thi	s selects whether to re-	verse the polarity of the parallel clock signal.					
		0	Nega	This outputs the clock signal with a reversed polarity.					
		1	Posi	This outputs the clock signal with a non-reversed polarity.					
(5)	HD (0/1)	This selects whether to reverse the polarity of the parallel HD. For further details of the setting procedure, refer to "3.2 Vertical timing data editing."							
		0	Nega	This outputs the clock signal with a reversed polarity.					
		1	Posi	This outputs the clock signal with a non-reversed polarity.					
(6)	VD (0/1)	This selects whether to reverse the polarity of the parallel VD. For further details of the setting procedure, refer to "3.2 Vertical timing data editing."							
		0	Nega	This outputs the clock signal with a reversed polarity.					
		1	Posi	This outputs the clock signal with a non-reversed polarity.					
(7)	CS (0/1)	Thi	s selects whether to rev	verse the polarity of the parallel CS.					
		0	Nega	This outputs the clock signal with a reversed polarity.					
		1	Posi	This outputs the clock signal with a non-reversed polarity.					
(8)	DISP (0/1)	This selects whether to reverse the polarity of the parall							
		0	Nega	This outputs the clock signal with a reversed polarity.					
		1	Posi	This outputs the clock signal with a non-reversed polarity.					

4.7 Analog component signals


4.7.1 Connectors and output signals

■ TV encoder board component outputs (BNC)



Connector	Signal
PB	Pb
Υ	Υ
PR	Pr


■ PC unit board component outputs (BNC)




Connector	Signal
CS	CS
VS	VS
HS	HS
B/PB	B or Pb
G/Y	G or Y
R/PR	R or Pr

4.7.2 Setting the analog output connectors

The analog component signals and output signals from the HS and CS connectors can be set for each program.

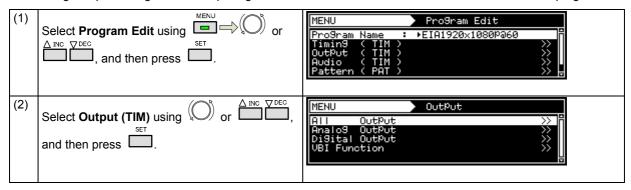

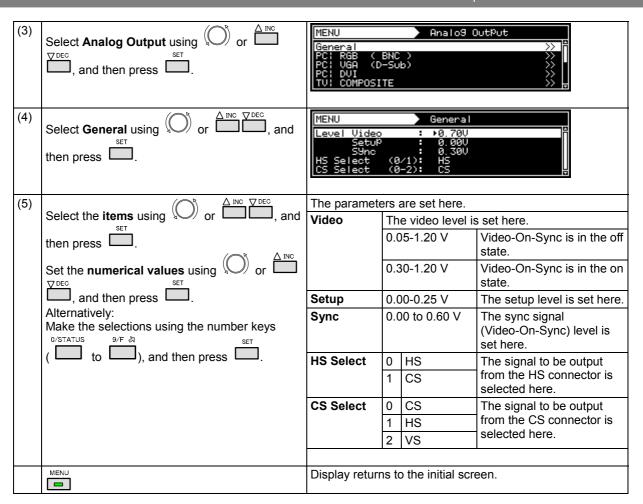



Set within the range of [Video \geq Setup] and [Video \geq Sync] and [Video \geq (Setup + Sync)].

4.7.3 Setting the analog video level

For details on changing the analog video level, refer to "4.1.7 Setting the analog level (temporary settings)."

4.7.4 Sync signal settings

For further details on the sync signal ON/OFF settings and polarity settings, refer to "4.1.2 Setting the sync signals to ON or OFF and setting the sync signal polarities."

4.8 Composite connector and Y/C connector (S connector)


4.8.1 Connectors and output signals

■ Composite connector



Connector	Signal
COMPOSITE	Composite video

■ Y/C connector (S connector)



Pin no.	Signal
1	GND
2	GND
3	Υ
4	С

■ Concerning the output signals

The following video signals can be output from the composite connector and Y/C connector of the TV encoder unit.

- NTSC-M, NTSC-J, NTSC-443
- PAL-60, PAL, PAL-M, PAL-N, PAL-Nc
- SECAM




 If the timing of the composite and Y/C signals (such as the period and sync width data) has been changed from that in the internal program, it may no longer be possible to draw the patterns on the monitor correctly.


4.8.2 Composite signal filter settings

The amount of attenuation (or gain) in the 4.5 MHz frequency of the composite and Y/C signals can be set.

This setting is processed before the chrominance is added to the video signals so that the color burst is not affected.

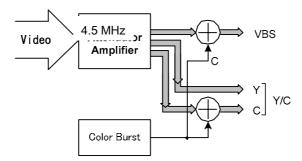

Setting procedure

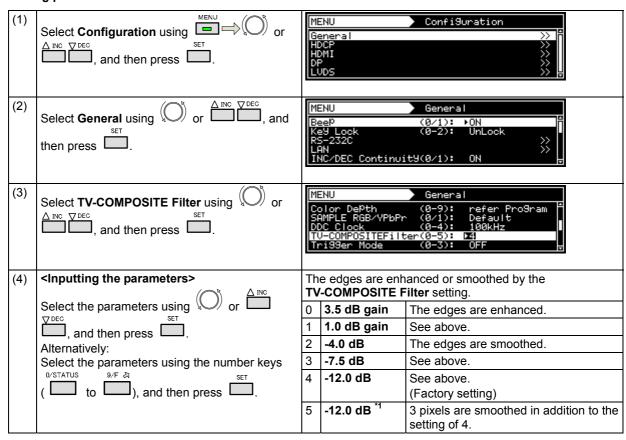


^{*} The filter settings are shared by the Y/C and SCART outputs.

4.8.3 Setting the ID signals (Y/C)

With the Y/C signals, identification of the aspect ratio is enabled by superimposing the ID DC signal onto the C signal.

Setting procedure

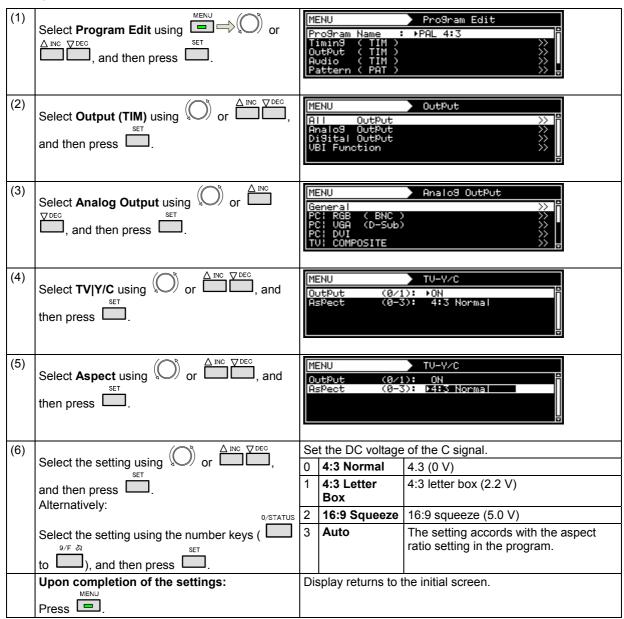


4.8.4 Functions available with TV standard signals

Microvision, closed caption, V-Chip, Teletext, WSS and CGMS-A/ID-1 can be multiplexed with the composite signals and Y signal.

For details on the setting procedure, refer to "5. FUNCTIONS AVAILABLE WITH TV STANDARD SIGNALS."

4.9 D5 (D connector)

4.9.1 Connectors and pin assignments




Pin no.	Signal	Pin no.	Signal
1	Υ	8	Line 1
2	GND (Y)	9	Line 2
3	Pb	10	NC
4	GND (Pb)	11	Line 3
5	Pr	12	NC
6	GND (Pr)	13	NC
7	NC	14	NC

4.9.2 ID signals

ID signals indicating the resolution, scanning system and aspect ratio can be output from the D connector. The ID signals are DC signals, and they identify the formats using three lines. These lines are referred to as line 1, line 2 and line 3.

Setting procedure

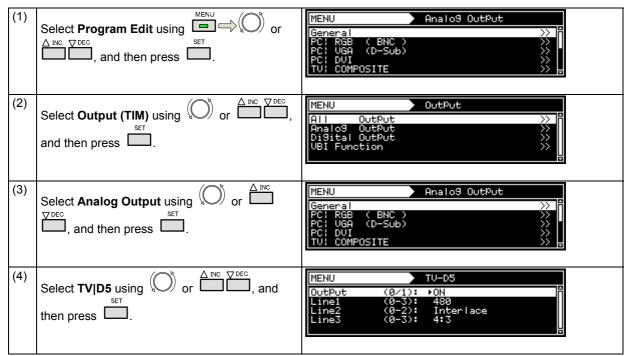


(5)	<selecting items="" the=""></selecting>	For further details on the setting items and parameters,
	Select the items using or or or and, and	refer to <table d5="" items="" of="" setting=""> below.</table>
	then press .	
	<setting parameters="" the=""></setting>	
	Select the parameters using \bigcirc or $\stackrel{\triangle \text{\tiny INC}}{\square}$	
	\Box , and then press \Box .	
	Alternatively:	
	Select the parameters using the number keys	
	0/STATUS 9/F ऄ SET	
	(L to L), and then press L.	
	Upon completion of the settings:	Display returns to the initial screen.
	MENU	
	Press .	

<Table of D5 setting items>

(1)	Line1 (0-2)	Lin	Line1: This sets the resolution.			
		0	480	720 × 480		
		1	720	1280 × 720		
		2	1080	1920 × 1080		
		3	Auto	The setting accords with the program setting.		
(2)	Line2 (0/1)	Lin	e2: This sets the scannir	ng system.		
		0	Interlace	Interlaced		
		1	Progressive	Progressive		
		2	Auto	The setting accords with the program setting.		
(3)	Line3 (0-2)	Lin	e3: This sets the aspect	ratio.		
		0	4:3	4:3		
		1	4:3 Letter Box	4:3 letter box		
		2	16:9	16:9		
		3	Auto	The setting accords with the program setting.		

4.10 VGA (D-Sub)

4.10.1 Connectors and pin assignments



Pin no.	Signal	Pin no.	Signal
1	R	9	+5 V (DDC power supply *1)
2	G	10	GND
3	В	11	GND
4	NC	12	DDC DATA
5	NC	13	HS
6	GND (R)	14	VS
7	GND (G)	15	DDC CLK
8	GND (B)		

^{*1:} Restrictions apply to the supply current of the DDC power supply. Refer to "12.3 Concerning the maximum current consumption of the DDC (DP_PWR) power supply."

4.10.2 Video level settings

The setting procedure is the same as for the analog component signals.

Refer to "4.1.7 Setting the analog level (temporary settings)" and "4.7.2 Setting the analog output connectors."

4.10.3 Sync signal settings

The setting procedure is the same as for the analog component signals. Refer to "4.1.2 Setting the sync signals to ON or OFF and setting the sync signal polarities"

4.10.4 EDID


The operation procedure is the same as for HDMI. Refer to "6.13.3 EDID."

4.10.5 DDC/CI

The operation procedure is the same as for DVI. Refer to "6.13.4 DDC/CI."

4.11 **SCART**

4.11.1 Connectors and pin assignments

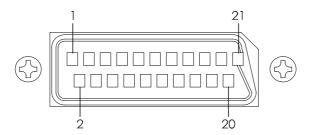

Pin no.	Signal	Pin no.	Signal
1	Audio right channel output	11	Component G output
2	N.C.	12	N.C.
3	Audio left channel output	13	GND
4	GND	14	GND
5	GND	15	Component R output/C output
6	GND	16	RGB status
7	Component B output	17	GND
8	Video Status	18	GND
9	GND	19	Composite/Y output/CS
10	N.C.	20	N.C
		21	GND

4.11.2 SCART setting procedure

<SCART setting procedure>

(1)	Select Program Edit using SET or and then press .	MENU Pro9ram Edit Pro9ram Name : ▶EIA1920x1080P060 Timin9 (TIM) >>> OutPut (TIM) >>> Audio (TIM) >>> Pattern (PAT) >>> P
(2)	Select Output (TIM) using or or or or and then press.	MENU OutPut All OutPut >>> P AnaloS OutPut >>> DiSital OutPut >>> UBI Function >>> P
(3)	Select Analog Output using or	MENU Analog OutPut General
(4)	Select SCART using or or or or and then press.	MENU TV-SCART OutPut 1ch (0/1): ▶ON 2ch (0/1): ON OutPut Select(0-2): COMPOSITE Video Status (0-3): Auto RGB Status (0-3): Auto
(5)	Select the items using or or incomplete, and then press incomplete. Inputting the parameters using or incomplete. Select the parameters using or incomplete. Select the parameters using the number keys of	For further details on the parameters, refer to SCART setting parameters>.

<SCART setting parameters>

(1)	Output 1ch (0/1) Output 2ch (0/1)	Th	This sets On or Off for each channel. The same settings as the ones described in "4.1.1 Setting the output interfaces to ON or OFF" can also be established.			
		0				
		1	On	Output.		
(2)	Output Select (0-2)		This sets the format of the video signals which are output from the SCAR connector.			
		0	COMPOSITE	Composite signals are output.		
		1	Y/C	Y/C signals are output.		
		2	RGB	RGB signals are output.		
(3)	Video Status (0-3)	Th	is sets the video status si	ignal which is output from the SCART connector.		
		0	Auto	The setting accords with the program setting.		
		1	4:3	4:3 (identified voltage: 12 V (9.5 to 12.0 V))		
		2	16:9	16:9 (identified voltage: 5 V (4.5 to 7.0 V))		
		3	No Signal	No output. (identified voltage: 0 V (0.0 to 2.0 V))		
(4)	RGB Status (0-3)	Th	is sets the RGB status sig	gnal which is output from the SCART connector.		
		0	Auto	The signal is set automatically by Output Select .		
		1	VBS	Composite or Y/C signals (identified voltage: 0 V)		
		2	RGB	RGB (identified voltage: 5 V)		
		3	Fast Blanking	The fast blanking signal is output.		
(5)	Fast Blanking Area	Th	is sets the output range o	of the fast blanking signal.		
		Н	H The horizontal output range is set as a percentage of H-Disp. Setting range: 0% to 100%			
		٧	V The vertical output range is set as a percentage of V-Disp. Setting range: 0% to 100%			
(6)	Audio Out1ch (0/1)	Th	This sets on or off for each channel.			
	. ,	0				
		1	ON	Output.		
(7)	Audio Out2ch (0/1)	Th	This setting is the same as for the Audio Out1ch setting.			

4.11.3 Functions available with TV standard signals

Microvision, closed caption, V-Chip, Teletext, WSS and CGMS-A/ID-1 can be multiplexed with the composite signals and Y signal.


For details on the setting procedure, refer to "5. FUNCTIONS AVAILABLE WITH TV STANDARD SIGNALS."

4.11.4 Filter settings

For further details on the setting procedure, refer to "4.8.2 Composite signal filter settings."

4.11.5 Concerning the fast blanking signal

The fast blanking signal is a control signal for selecting the composite output and RGB output video signals which are output from the 16-pin SCART connector, and displaying them. By using it, displays can be shown as with on-screen displays. When the fast blanking signal level is low (0 V), the CVBS video signals are displayed on the monitor; when it is high (5 V), the RGB video signals are displayed.

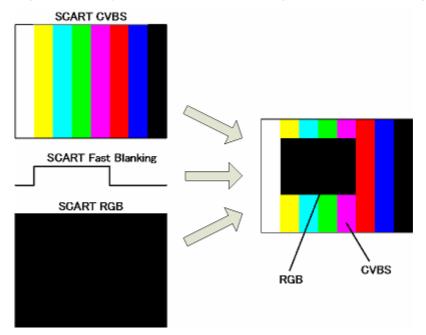



 With the VG-870B/871B, different images other than black-filled images cannot be output from the composite and RGB output pins of the SCART connector. If COMPOSITE or Y/C has been set for Output Select among the SCART setting, a black-filled image is output to the RGB output pins of the SCART connector; if RGB has been set, the same image as the composite pin is output.


4.11.6 Audio settings

For details on the setting procedure, refer to "4.15 Analog audio settings."

4.12 DisplayPort

4.12.1 Connectors and pin assignments


■ DisplayPort



Pin No.	Signal
1	MainLink Lane0 (p)
2	GND
3	MainLink Lane0 (n)
4	MainLink Lane1 (p)
5	GND
6	MainLink Lane1 (n)
7	MainLink Lane2 (p)
8	GND
9	MainLink Lane2 (n)
10	MainLink Lane3 (p)
11	GND
12	MainLink Lane3 (n)
13	GND
14	GND
15	AUX CH (p)
16	GND
17	AUX CH (n)
18	Hot Plug Detect
19	PWR_Return (not used)
20	DP_PWR (+3.3 V)

^{*} The DDC power supply current is limited. Refer to "12.3 Concerning the maximum current consumption of the DDC (DP_PWR) power supply."

4.12.2 DisplayPort setting procedure

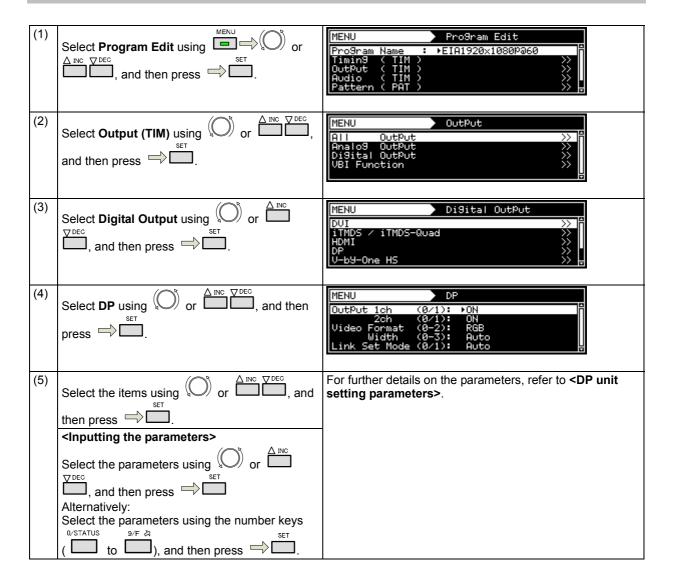

<DP unit setting parameters>

Output 2ch (0/1)	(1)	Output 1ch (0/1)	This sets On or Off for each channel.			
Interfaces to ON or OFF* can also be established. O OFF No output.	(1)		I			
1 ON Output.		Output 2011 (0/1)				
1 ON Output.			0	OFF	No output.	
Mode (0-2)			1	ON	-	
For further details, refer to "b) Concerning the drawing mode" in this section	(2)	Mode (0-2)	Thi	is sets th		1
O Single Output in Single mode.	(-)					
1 Dual Output in Dual mode. 2 Split Output in Split mode. 2 Split Output in Split mode. 3 Split Output in Split mode. 4 Split Output in Split mode. 5 Split mo					,	
2 Split Output in Split mode.			1			
Video Format (0-2)			-			'
* When the YCbCr4:2:2 format has been selected, it is not possible display the gray scale which accords with the bit length (gray scal which has been set. (64-step gray scale with an 8-bit output) Use the parameter to check the Main Stream Attribute parameters rather than using it to assess the image quality. 0 RGB	(3)	Video Format (0-2)		•	e color space of	
display the gray scale which accords with the bit length (gray scale which has been set. (64-step gray scale with an 8-bit output) Use the parameter to check the Main Stream Attribute parameters rather than using it to assess the image quality. RGB	(0)	71400 1 011114t (0 2)	*			
1 YCbCr4:4:4 The video is output using YCbCr4:4:4 signals.				which h	as been set. (6 ter to check the	4-step gray scale with an 8-bit output) Use this e Main Stream Attribute parameters rather
Width (0-3) This sets the bit length of the output video. A setting independent of the bit length for pattern drawing can be selected, or the same bit length can be selected automatically. * The portion by which the bit length for pattern drawing exceeds the bit length set here is discarded. Any deficient portion is filled with zeros. Refer to "4.1.5 Setting the bit length (gray scale) for pattern drawing" * The bit length setting differs according to the video format. For further details, refer to "c) Concerning the bit length setting" in this section. * For further details on the bit length to be output, refer to "c) Concerning the bit length setting" in this section. 0 Auto 6, 8, 10 or 12 bits is selected here automatical depending on the bit length for pattern drawing depending on the bit length for pattern drawing a lobit 10-bit output 2 8bit 8-bit output 3 10bit 10-bit output 4 12bit 12-bit output 1 4 12bit 12-bit output 4 12bit 12-bit output This selects the Main Stream Attribute. To change the color difference coefficients setting, refer to "4.1.6 Selecting RGB or YPbPr and setting the color difference coefficients". This selects the Link Rate and Number of Lane setting method. Auto Output accords with the DPCD of the sink component. Manual Output accords with the settings of items (7) a (8). This parameter can be set when Link Set Mode is "Manual". This sets the link rate. United the link rate "HBR (2.7 Gbps)" Output at the link rate "HBR (2.7 Gbps)"			0	RGB		The video is output using RGB signals.
(4) Width (0-3) This sets the bit length of the output video. A setting independent of the bit length for pattern drawing can be selected, or the same bit length can be selected automatically. The portion by which the bit length for pattern drawing exceeds the bit length set here is discarded. Any deficient portion is filled with zeros. Refer to "4.1.5 Setting the bit length (gray scale) for pattern drawing. The bit length setting differs according to the video format. For further details, refer to "c) Concerning the bit length setting" in this section. For further details on the bit length to be output, refer to "c) Concerning the bit length setting" in this section. Auto Auto Bellot B			1	YCbCr4	1:4:4	The video is output using YCbCr4:4:4 signals.
length for pattern drawing can be selected, or the same bit length can be selected automatically. * The portion by which the bit length for pattern drawing exceeds the bit length set here is discarded. Any deficient portion is filled with zeros. Refer to "4.1.5 Setting the bit length (gray scale) for pattern drawing" * The bit length setting differs according to the video format. For further details, refer to "c) Concerning the bit length setting" in this section. * For further details on the bit length to be output, refer to "c) Concerning the bit length setting" in this section. Auto			2	YCbCr4	:2:2	The video is output using YCbCr4:2:2 signals.
length set here is discarded. Any deficient portion is filled with zeros. Refer to "4.1.5 Setting the bit length (gray scale) for pattern drawing" * The bit length setting differs according to the video format. For further details, refer to "c) Concerning the bit length setting" in this section. * For further details on the bit length to be output, refer to "c) Concerning the bit length setting" in this section. Auto	(4)	Width (0-3)	len	gth for page	attern drawing c tomatically.	an be selected, or the same bit length can be
the bit length setting" in this section. Auto			*	rded. Any deficient portion is filled with zeros. bit length (gray scale) for pattern drawing" ffers according to the video format. For further cerning the bit length setting" in this section.		
depending on the bit length for pattern drawing			*	the bit le		this section.
2 8bit 8-bit output 3 10bit 10-bit output 12-bit			0	Auto		6, 8, 10 or 12 bits is selected here automatically depending on the bit length for pattern drawing.
3 10bit 10-bit output 12-bit output			1	6bit		6-bit output
Colorimetry (0/1)			2	8bit		8-bit output
(5) Colorimetry (0/1) This selects the Main Stream Attribute "YCbCr Colorimetry". * This sets only the Main Stream Attribute. To change the color difference coefficient setting, refer to "4.1.6 Selecting RGB or YPbPr and setting the color difference coefficients". 0 ITU601 This sets ITU-R BT601. 1 ITU709 This sets ITU-R BT709. (6) Link Set Mode (0/1) This selects the Link Rate and Number of Lane setting method. 0 Auto Output accords with the DPCD of the sink component. 1 Manual Output accords with the settings of items (7) at (8). (7) Link Rate (0/1) * This parameter can be set when Link Set Mode is "Manual". This sets the link rate. 0 HBR(2.7Gbps) Output at the link rate "HBR (2.7 Gbps)"			3	10bit		10-bit output
* This sets only the Main Stream Attribute. To change the color difference coefficient setting, refer to "4.1.6 Selecting RGB or YPbPr and setting the color difference coefficients". O ITU601 This sets ITU-R BT601. 1 ITU709 This sets ITU-R BT709.			4	12bit		12-bit output
coefficient setting, refer to "4.1.6 Selecting RGB or YPbPr and setting the color difference coefficients". O ITU601 This sets ITU-R BT601. 1 ITU709 This sets ITU-R BT709.	(5)	Colorimetry (0/1)	Thi	is selects	the Main Stream	m Attribute "YCbCr Colorimetry".
1 ITU709 This sets ITU-R BT709.			*	coefficie	ent setting, refer	to "4.1.6 Selecting RGB or YPbPr and setting the
(6) Link Set Mode (0/1) This selects the Link Rate and Number of Lane setting method. O Auto Output accords with the DPCD of the sink component. I Manual Output accords with the settings of items (7) at (8). This parameter can be set when Link Set Mode is "Manual". This sets the link rate. O HBR(2.7Gbps) Output at the link rate "HBR (2.7 Gbps)"			0	ITU601		This sets ITU-R BT601.
0 Auto Output accords with the DPCD of the sink component. 1 Manual Output accords with the settings of items (7) a (8). (7) Link Rate (0/1) * This parameter can be set when Link Set Mode is "Manual". This sets the link rate. 0 HBR(2.7Gbps) Output at the link rate "HBR (2.7 Gbps)"			1	ITU709		This sets ITU-R BT709.
0 Auto Output accords with the DPCD of the sink component. 1 Manual Output accords with the settings of items (7) a (8). (7) Link Rate (0/1) * This parameter can be set when Link Set Mode is "Manual". This sets the link rate. 0 HBR(2.7Gbps) Output at the link rate "HBR (2.7 Gbps)"	(6)	Link Set Mode (0/1)	Thi	is selects	the Link Rate a	and Number of Lane setting method.
(8). This parameter can be set when Link Set Mode is "Manual". This sets the link rate. O HBR(2.7Gbps) Output at the link rate "HBR (2.7 Gbps)"	0 Auto					
This sets the link rate. 0 HBR(2.7Gbps) Output at the link rate "HBR (2.7 Gbps)"			1	Manual		Output accords with the settings of items (7) and (8).
This sets the link rate. 0 HBR(2.7Gbps) Output at the link rate "HBR (2.7 Gbps)"	(7)	Link Rate (0/1)	*	This pa	rameter can be	set when Link Set Mode is "Manual".
		, ,				
			0	0 HBR(2.7Gbps) Output at the link rate "HBR (2.7		Output at the link rate "HBR (2.7 Gbps)"
			1			Output at the link rate "RBR (1.62 Gbps)"

(8)	Number of Lane (0-2)	* This parameter can be set when the Link Set Mode is "Manual".				
		Th	This sets the number of output lanes.			
		0	1lane		Output on 1 lane	
		1	2lanes		Output on 2 lanes	
		2	4lanes		Output on 4 lanes	
(9)	Nvid	1-1	I-1667216 This sets the Nvid		vid value.	
					alue is automatically calculated from the dot the Nvid value.	
(10)	HPD Mode (0/1)	Th	is sets th	e Hotplug detec	tion status.	
		0	0 OFF		Hotplug is ignored.	
		1			Hotplug is judged according to the status of the connected component.	

a) Concerning the all program fixed setting

The program settings for the following setting items can be ignored and output can be performed with the entire program fixed according to the device setting. For example, this is used to set an entire sample program to HPD mode OFF, or to change the output video bit length but leave other settings unchanged, etc.

Parameters which can be set to program fixed

Item	Remarks			
Width	Refer to "4.1.5 Setting the bit length (gray scale) for pattern drawing."			
Link Set Mode	See below.			
HPD Mode				

Follow the procedure below to set Link Set Mode and HPD Mode.

(1)	Select Configuration using or or \triangle inc ∇ DEC, and then press \Longrightarrow .	MENU Configuration General SOUTH SO
(2)	Select DP using or or or and then select or	MENU DP Analysis Port (0/1): ▶DP1 Link Set Mode (0-2): refer Program HPD Mode (0-2): refer Program
(3)	Select the items using \bigcirc or $\stackrel{\triangle}{\longrightarrow}$ or $\stackrel{\nabla}{\longrightarrow}$, and then press \Longrightarrow $\stackrel{\text{SET}}{\longrightarrow}$.	For further details on the parameters, refer to Program fixed setting parameters >.
	<pre><inputting parameters="" the=""></inputting></pre>	
	Select the parameters using or	
	(STATUS 9/F & SET SET SET SET	

<Program fixed setting parameters>

(1)	Link Set Mode(0-2)	This selects the Link Set Mode setting method. For further details, refer to " <dp parameters="" setting="" unit=""> 'Link Set Mode'" in</dp>					
		this section.					
		0	refer Program	The setting accords with the program setting.			
		1	Auto	Output always accords with the DPCD of the			
				sink component.			
		2	Manual	Output always accords with the Link Rate and			
				Number of Lane set by the program.			
(2)	HPD Mode (0-2)	Thi	is selects the Hotplug det	ection method.			
		Fo	r further details, refer to "	<dp parameters="" setting="" unit=""> 'HPD Mode'" in this</dp>			
		sec	ction.				
		0 refer Program		The setting accords with the program setting.			
		1 OFF		Hotplug is always ignored.			
		2	ON	Hotplug is always judged according to the status			
				of the connected component.			


b) Concerning the drawing mode

The following video output modes are possible using the two DisplayPort output ports.

The examples below describe the case for 1280×1024 resolution, a 108 MHz dot clock, and a 10-bit output gray scale.


(1) Single mode

This is the normal output mode. The same video is output from both Port1 and Port2.

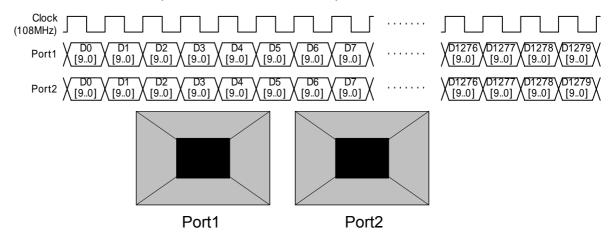


(2) Dual mode

The video data is output alternately from Port1 and Port2.

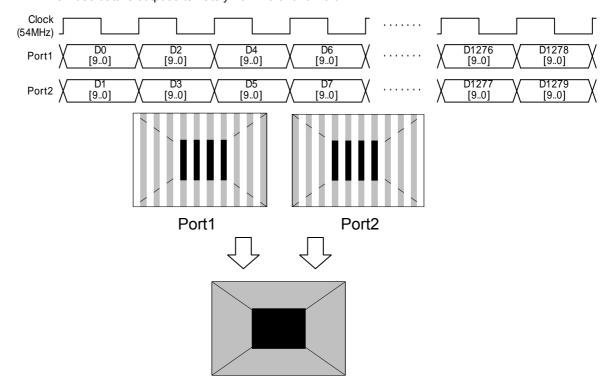

(3) Split mode

The left half of the video data is output from Port1, and the right half of the video data from Port2.

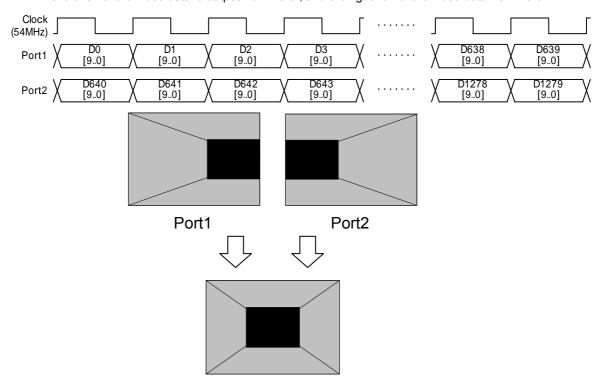

c) Concerning the bit length setting

The valid bit length settings differ according to the video format as follows.

Video Format	bit Width			
Video Format	6bit	8bit	10bit	12bit
RGB	0	0	0	×
YCbCr4:2:2	0	0	0	0
YCbCr4:4:4	0	0	0	×

* When the YCbCr4:2:2 format has been selected, up to 12 bits can be set as the bit length. However, it is not possible to display the gray scale which accord with the bit length (gray scale) which has been set. (64-step gray scale with an 8-bit output) Use this parameter to check the Main Stream Attribute parameters rather than using it to assess the image quality.

d) Concerning the Main Stream Attribute settings


The Main Stream Attributes used for DisplayPort transfer are reflected by the following settings.

Item		Setting location
M and N for stream clock recovery	Mvid	This is automatically calculated from the Nvid setting value and the dot clock. (The VG-870B/871B is fixed to asynchronous mode, so the Mvid value varies.)
	Nvid	This accords with the DisplayPort setting "Nvid". Refer to " <dp parameters="" setting="" unit="">" in this section.</dp>
Horizontal/Vertical Timing	Total Active start Active video width Sync width	This is calculated from the value set by the Timing setting. For further details, refer to "Timing setting".
	polarity	This accords with the sync signal polarity set by the Output setting. For further details, refer to "4.1.2 Setting the sync signals to ON or OFF and setting the sync signal polarities"
Miscellaneous0	Synchronous Clock	The VG-870B/871B is fixed to asynchronous mode.
	Component format	This accords with the DisplayPort setting "Video Format". Refer to " <dp parameters="" setting="" unit="">" in this section. Full: VESA range Limited: CEA range</dp>
	Dynamic range	This accords with the Output setting "Level Mode". For further details, refer to "4.1.3 Setting the level mode ".
	YCbCr Colorimetry	This accords with the DisplayPort setting "Colorimetry". Refer to " <dp parameters="" setting="" unit="">" in this section.</dp>
	Bit depth per color component	This accords with the DisplayPort setting "Width". Refer to " <dp parameters="" setting="" unit="">" in this section.</dp>
Other		Settings other than the above are not supported by the VG-870B/871B.

4.12.3 Displaying the DisplayPort setting information


The DisplayPort setting information (Link Rate, Number of Lane, Link training results, DPCD) can be displayed.

a) DisplayPort setting display procedure

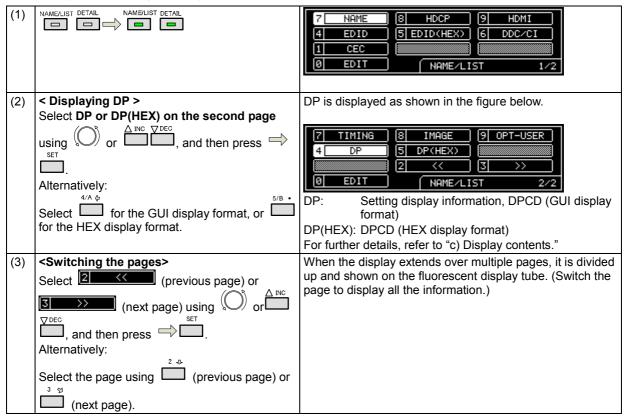

b) Selecting the displayed port

Select the port for which the setting information is to be displayed (acquired) as follows.

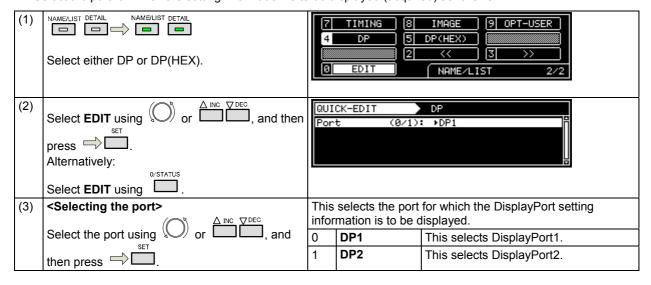


c) Setting contents

Displayed information

(1) Setting display information (GUI page 1)

This page displays the DisplayPort interface settings (Link Rate, Number of Lane, Main Stream Attribute) and the link training results.

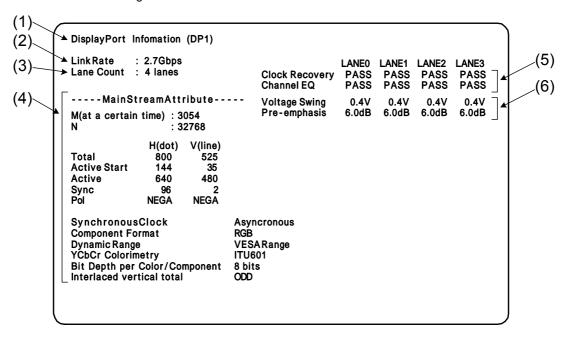

Details of the displayed information are as follows.


(1)	This is the port for which the setting status is displayed.
(2)	Link Rate setting value
(3)	Number of lane setting value
(4)	Main Stream Attribute (Only supported values are displayed.) * The Mvid value actually varies, but the value at the time of this display setting is displayed.
(5)	Link training results (clock recovery, channel equalizer) for each lane
(6)	Voltage swing and pre-emphasis for each lane

(2) DPCD display (GUI page 2 and onward, HEX is DPCD display only

These pages display the DPCD (DisplayPort Configuration Data). The data for different addresses can be displayed by switching the page.

```
===DPCD:ReceiverCapabilityField[Port=DP1]
               DPCD_REV:11h
DPCD_REV=1.1
00000
               DPCD_REV=1.1
MAX_LINK_RATE:0Ah
MAX_LINK_RATE=2.7Gbps
MAX_LANE_COUNT:84h
MAX_LANE_COUNT=4,ENHANCED_FRAME_CAP=1
MAX_DOWNSPREAD:00h
00002
00003 I
               MAX_DOWNSPREAD=0,NO_AUX_HANDSHAKE_LINK_TRAINING=0
NORP:00h
00004
               NORP = 0
DWN_STREAM_PORT_PRESENT:00h
DWN_STREAM_PORT_PRESENT=0,DWN_STREAM_PORT_TYPE=DisplayPort
00005
               DWN_SIREAM_PORT_PRESENT=0,DWN_SIREAM_PORT_TYP
FORMAT_CONVERSION=0
MAIN_LINK_CHANNEL_CODING:00h
MAIN_LINK_CHANNEL_CODING=---
DWN_STREAM_PORT_COUNT:00h
DWN_STREAM_PORT_COUNT=0,OUISupport=notsupported
00006
00007
               DWN_SIREAM_PORT_COUNT=U,OUTSUPPORT=NOTSUPPORT=0
RECEIVE_PORTO_CAPO:00h
LOCAL_EDID_PRESENT=0,ASSOCIATED_TO_PRECENDING_PORT=0
RECEIVE_PORTO_CAP1:00h
BUFFER_SIZE=32byte/lane
RECEIVE_PORT1_CAP0:00h
00008
00009
0000A
               LOCAL_EDID_PRESENT=0,ASSOCIATED_TO_PRECENDING_PORT=0
RECEIVE_PORT1_CAP1:00h
BUFFER_SIZE=32byte/lane
0000B
           (2)
                                                            (3)
```

DPCD display (GUI)

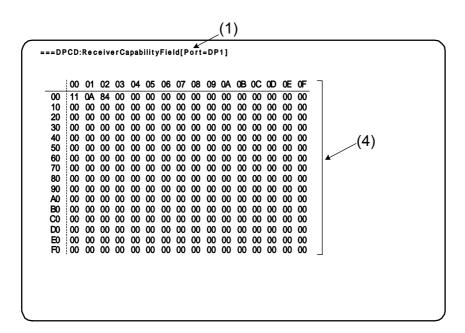

DPCD display (HEX)

Details of the displayed information are as follows.


(1)	Port and DPCD field for which the setting status is displayed.
(2)	DPCD address
(3)	Setting values for each parameter
(4)	HEX display

4.12.4 DisplayPort Analysis

The DisplayPort Analysis mode is used to perform the link check evaluation and otherwise evaluate the DisplayPort interface.


a) Setting the port to be used

Select the port to be used by DisplayPort Analysis with the device settings.

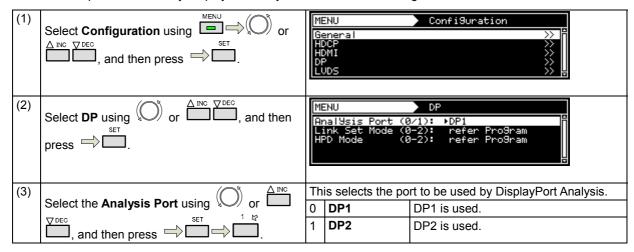

b) I/F Check mode

This mode performs a simple check on the DisplayPort interface. This makes it possible to check link training, Hotplug detection (cable connection/disconnection) and other behavior without creating a program.

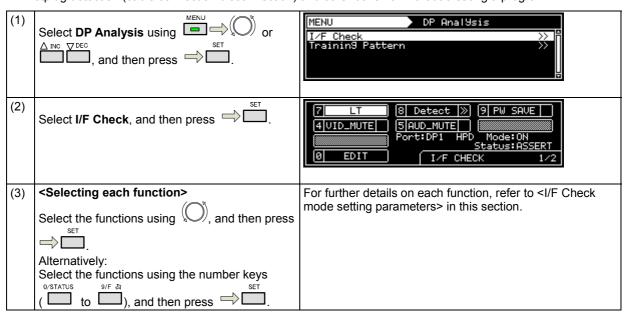

<I/F Check mode setting parameters>

The following functions are available in I/F Check mode.

Page	Number key	Item	Description		
1/2	7	LT	Link training is performed each time this key is pressed.		
	8	Hotplug	This switches the Hotplug status.		
			Detect The current connected status is judged.		
			Negate	The Hotplug status is forcibly set to the Negate status. (*1).	
	9	PW SAVE	This makes the power save mode setting for the connected component.		
	4	VID_MUTE	This sets Video MUTE to On or Off. (*2)		
	5	AUD_MUTE	This sets Audio MUTE to On or Off. (*2)		
	0	EDIT	This enters the DisplayPort output setting menu.		
2/2	7	DEFAULT	This returns to the currently selected program pattern.		
	8	LIST	This displays the DisplayPort display screen GUI (refer to "4.12.3 Displaying the DisplayPort setting information").		
	9	EDID	This reads the EDID of the connected component. This is the same operation as the normal EDID Read operation.		
	0	EDIT	This enters the DisplayPort output setting menu.		

When Page 1 is displayed, the following Hotplug statuses are shown.

Item	Description			
Port	This displays the port to be used by the "DisplayPort Analysis" set by the device settings.			
HPD Mode	This displays the HPD mode set by the DisplayPort output settings.			
Status	This displ	nis displays the Hotplug status.		
	ASSERT	Hotplug is asserted.		
NEGATE Hotplug is negated HPD mode is OFF. (The Hotplug status is not judged.)		Hotplug is negated.		
		HPD mode is OFF. (The Hotplug status is not judged.)		

*1 Concerning the Hotplug Negate setting

The Hotplug signal is used by the sink component to notify its status to the source component. This function performs processing to forcibly set the Negate status (cable disconnected status) on the VG-870B/871B side.

This function can be used to check sink component operation with respect to the initial operation of the source component (the VG-870B/871B), without disconnecting and connecting the cable.

*2 Concerning the VID_MUTE and AUD_MUTE settings

The VID_MUTE setting takes effect only for the "Port" which has been selected as the Configuration setting. The AUD_MUTE setting is set for both Port 1 and Port 2.

*3 The first page of the DisplayPort display screen GUI (refer to "4.12.3 Displaying the DisplayPort setting information") is shown when link training is restarted, such as when the LT key is pressed, the Hotplug detection is performed again, or operation recovers from power save mode, etc.

c) Training Pattern mode

This mode optionally outputs the "D10.2 pattern", "PRBS-7 pattern" and other training patterns used to check DisplayPort interface conformance during link training, etc.

* These patterns are not video patterns, and are instead patterns used for evaluation on the DisplayPort interface. Therefore, non-DisplayPort output and DisplayPort output that is not selected by "a) Setting the port to be used" remain as the video output displayed thus far.

(1)	Select Analysis using or	MENU DP Analysis I/F Check >>> Training Pattern >>>
(2)	Select Training Pattern , and then press	MENU Training Pattern (DP1) Pattern Select(0-3): ▶PRBS7 Link Rate (0/1): RBR(1.62GbPs) Number Of Lane(0-2): 4 lanes Voltage Swing (0-3): 0.4V Pre-emPhasis (0-3): 0dB
(3)	Selecting each function> Select the functions using , and then press ⇒□. Alternatively: Select the functions using the number keys o/status of the functions using the number keys to □ to □), and then press □.	For further details on each function, refer to <training mode="" parameters="" pattern="" setting=""> in this section.</training>

<Training Pattern mode setting parameters>

The following settings can be made in Training Pattern mode.

(1)	Pattern Select (0-3)	Th	is sets the pattern.	
		0	D10.2(TP1)	The D10.2 test pattern (Link Training Pattern1) is output.
		1	EQ(TP2)	The Link Training Pattern2 (Channel Equalization Sequence) is output.
		2	Symbol Error Rate	The Symbol Error Rate Measurement Pattern is output. (This pattern is output only, and the error rate is not measured.)
		3	PRBS7	The PRBS7 pattern is output.
(2)	Link Rate(0/1)	Th	is sets the link rate.	
		0	HBR(2.7Gbps)	Output at the link rate "HBR (2.7 Gbps)".
		1	RBR(1.62Gbps)	Output at the link rate "RBR (1.62 Gbps)".
(3)	Number of Lane(0-2)	This sets the number of output lanes.		
		0	1lane	Output on 1 lane.
		1	2lanes	Output on 2 lanes.
		2	4lanes	Output on 4 lanes.

(4)	Voltage Swing(0-3)	Th	is sets the voltage swing	level (differential level).
		0	0.4V	Output at 0.4 V
		1	0.6V	Output at 0.6 V
		2	0.8V	Output at 0.8 V
		3	1.2V	Output at 1.2 V
(5)	Pre-emphasis(0-3)	This sets the pre-emphasis level.		
		0	0dB	Output at 0 dB
		1	3.5dB	Output at 3.5 dB
		2	6.0dB	Output at 6.0 dB
		3	9.5dB	Output at 9.5 dB

- * The Training Pattern mode settings can be made only for the Main Link output. DPCD and other settings in accordance with each pattern and level are not made.
- * When returning from Training Pattern mode to normal output, the settings return to the program settings selected thus far.
- * The valid voltage swing level setting and pre-emphasis setting combinations are as follows.

Voltage Swing	Pre-emphasis					
voitage Swing	0dB	3.5dB	6dB	9.5dB		
0.4V	0	0	0	0		
0.6V	0	0	0	×		
0.8V	0	0	×	×		
1.2V	0	×	×	×		

4.12.5 Enbeded audio

 $\label{thm:constraints} \mbox{Enbedded audio signals can be output from the DisplayPort.}$

For further details on the setting procedure, refer to "4.16 Digital audio".

4.12.6 EDID

For further details on the setting procedure, refer to "6.13.3 EDID".

4.12.7 HDCP

For further details on the setting procedure, refer to "8.1 HDCP settings".


4.12.8 DDC/CI

For further details on the setting procedure, refer to "6.13.4 DDC/CI".

4.13 V-by-One HS

4.13.1 Connectors and pin assignments

• Connector: MDR 10226-1210-PE (made by 3M)



1CH				
Pin No.	Symbol			
1	GND			
2	GND			
3	NC			
3	Tx0n			
5	Tx0p			
6	Tx1n			
7	Tx1p			
8	GND			
9	SCL			
10	GND			
11	NC			
12	Tx3n			
13	Tx3p			
14	HTPDN1			
15	LOCKN1			
16	GND			
17	GND			
18	SDA			
19	GND			
20	NC			
21	NC			
22	Tx2n			
23	Tx2p			
24	NC			
25	GND			
26	GND			

2CH	
Pin No.	Symbol
1	GND
2	GND
1 2 3 4 5 6 7 8	NC
4	Tx4n
5	Tx4p
6	Tx5n
7	Тх5р
	GND
9	SCL
10	GND
11	NC
12	Tx7n
13	Tx7p
14	HTPDN2
15	LOCKN2
16	GND
17	GND
18	SDA
19	GND
20	NC
21	NC
22	Tx6n
23 24	Тх6р
24	NC
25	GND
26	GND

^{*1} No power is supplied.

4.13.2 V-by-One HS setting procedure

<V-by-One HS setting procedure>

(1)	Select Program Edit using SET or and then press .	MENU Pro9ram Edit Pro9ram Name : 170MHz 10Bit Timin9 (TIM)
(2)	Select Output using or or or and then press.	MENU OutPut All OutPut Analos OutPut Disital OutPut VBI Function OutPut OutPut
(3)	Select Digital Output using or	MENU DiSital OutPut DUI
(4)	Select V-by-One HS using or \triangle or \triangle or \triangle and then press \square .	MENU V-b9-One HS OutPut 1ch (0/1): ▶ON
(5)	Select the items using or $\stackrel{\triangle}{\longrightarrow}$ or $\stackrel{\nabla}{\longrightarrow}$, and then press .	For further details on the parameters, refer to the table below.
	Select the parameters using or	

<V-by-One HS setting parameters>


(1)	Output 1ch (0/1)	This sets On or Off for each channel.			
()	Output 2ch (0/1)	0 Off No output.			
		1	On	Output.	
(2)	Number Of Lane (0/5)			a lanes to be output from	V-hy-One HS
(2)			Auto	The number of data land	
		0	Auto		the dot clock frequency.
				* Only lanes 1 to 4 are supported.	
				20M - 75 MHz	1 Lane
				75M - 150 MHz	2 Lane
				150M - 300 MHz	4 Lane
		1	1 Lane	The image is output using number of data lanes.	ng one lane as the
				The same image is outp 1 and 2.	out from output channels
		2	2 Lane	The image is output using number of data lanes.	ng two lanes as the
				The same image is output from output channels 1 and 2.	
		3	4 Lane	The image is output using number of data lanes.	ng four lanes as the
				The same image is outp 1 and 2.	out from output channels
		4	8 Lane	The image is output using number of data lanes.	ng eight lanes as the
		5	16 Lane	The image is output using number of data lanes.	ng 16 lanes as the
(3)	Split(0/8)			ting type in the ×4 mode	or 4K×2K mode which
		use	es the frame memory on		
		0	MODE0	Screen split-into-4 output divided into 4 equal part	ut in the form of a square is
		1	MODE1	Screen vertically split-in	to-4 output
		2	MODE2	Screen horizontally split	-into-2 output
		3	MODE3	Screen vertically split-into-2 output	
		4	MODE0(x4 mode)	Non Dividing Mode	
		5	MODE1(x4 mode)	Normal Mode	
		6	MODE2(x4 mode)	Cross Mode	
		7	MODE3(x4 mode)	Dividing Normal Mode	
		8	MODE4(x4 mode)	Dividing Cross Mode	
(4)	Pre-Emphasis(0/1)	This sets the pre-emphasis.			
		0	0%	The pre-emphasis is se	t to 0%.
		1	100%	The pre-emphasis is se	t to 100%.
(5)	Field BET Mode(0/1)	e(0/1) This sets the Field BET Mode.			
		0	Disable	The Field BET Mode is	set to Disable.
		1	Enable	The Field BET Mode is	set to Enable.

4.13.3 Data transfer systems

<Specifications of mode during 4K×2K mode output>


During the 4K×2K mode output, 8 lanes are combined to output one screen.

[4K×2K 60 Hz 8-lane output]

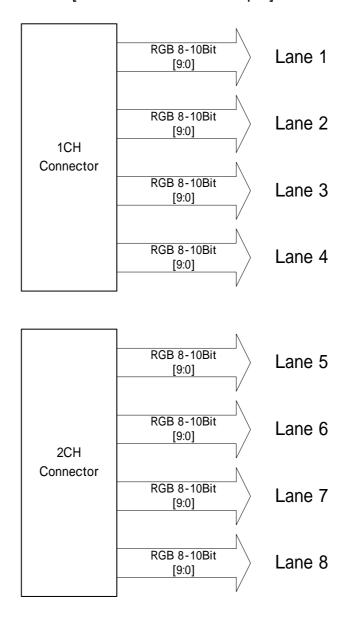


[1] MODE0 (8 Lane) - Normal

The image is split into 4 in the form of a square divided into 4 equal parts and assigned in sequence using lanes 1 and 2 for the top left part, lanes 3 and 4 for the top right part, lanes 5 and 6 for the bottom left part and lanes 7 and 8 for the bottom right part.

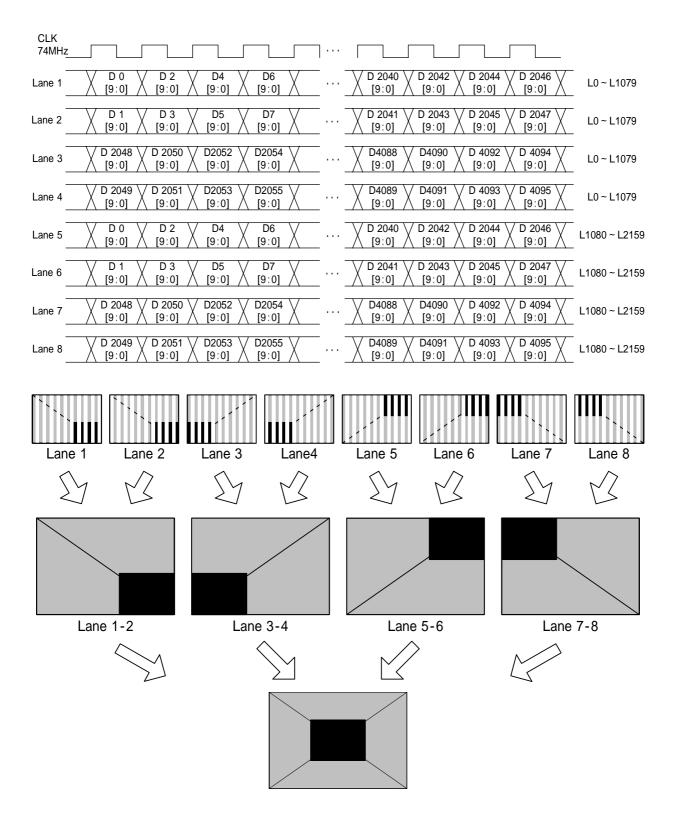


[2] MODE1 (8 Lane) - 4Split

The image is split horizontally into four parts and assigned in sequence from the left using lanes 1 and 2, lanes 3 and 4, lanes 5 and 6 and lanes 7 and 8.

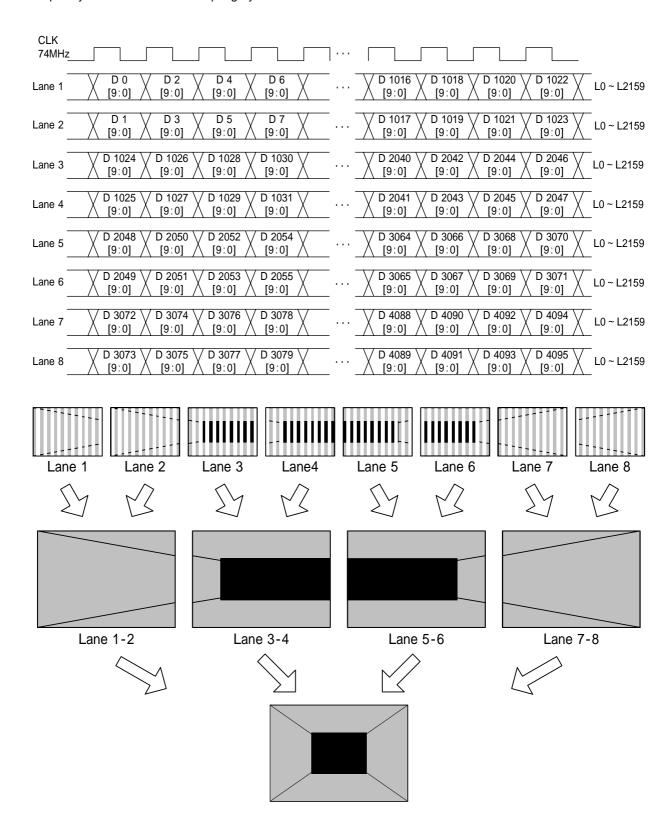


[3] MODE2 (8 Lane) (screen split horizontally into 2)

Using lanes 1 and 2 and lanes 3 and 4, the top half of the image is output in the even and odd numbers; similarly, using lanes 5 and 6 and lanes 7 and 8, the bottom half of the image is output in the even and odd numbers.

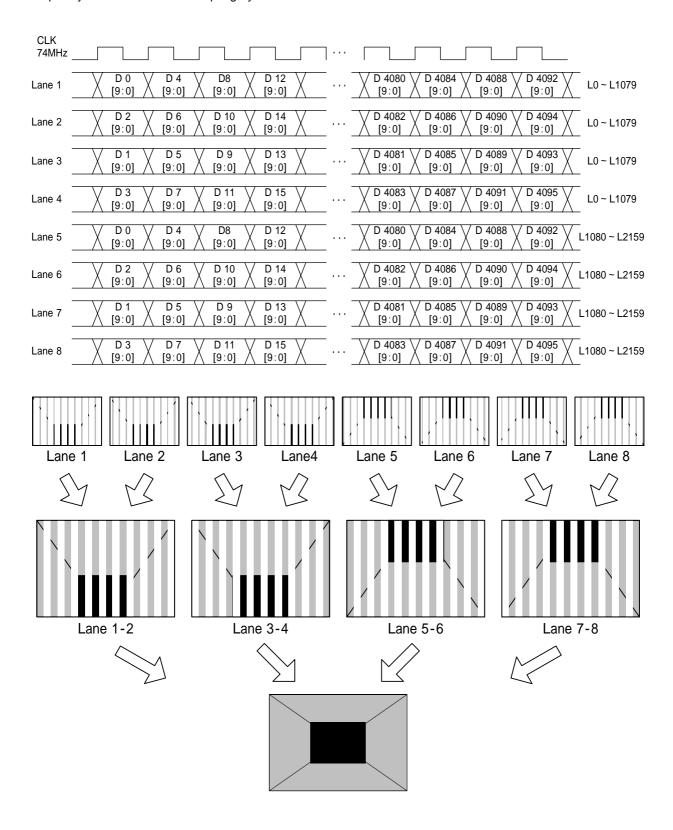

[4] MODE3 (8 Lane) - (screen split vertically into 2)


Using lanes 1 and 2 and lanes 3 and 4, the left half of the image is output in the even and odd numbers; similarly, using lanes 5 and 6 and lanes 7 and 8, the right half of the image is output in the even and odd numbers.

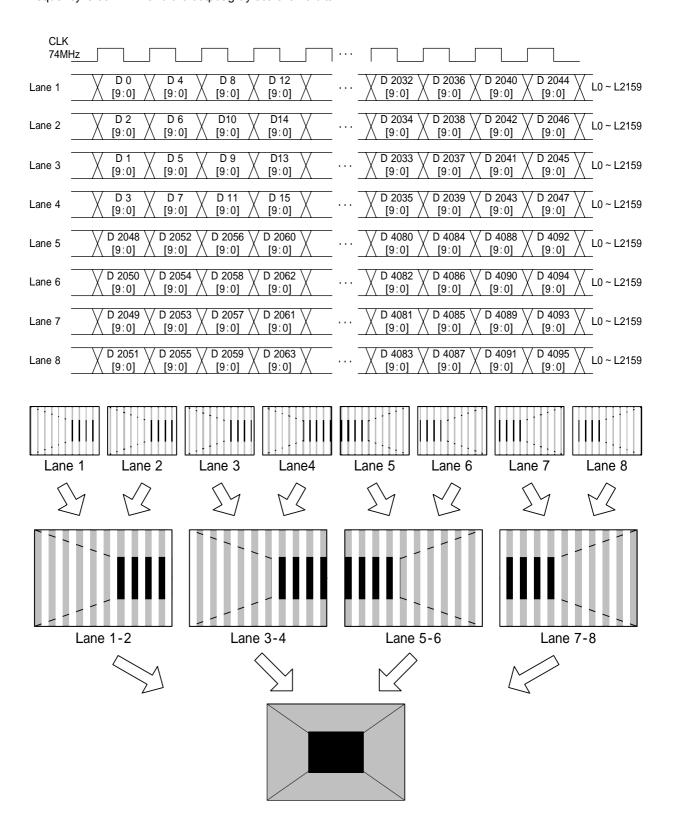

<Specifications of modes during ×4 mode output>


During Full HD 240 Hz output, eight lanes are combined to output one screen.

[Full HD 240 Hz 8-lane output]

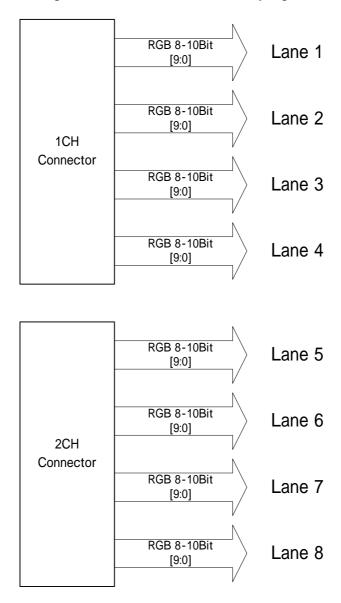


[1] MODE0 (8 Lane) - No screen splitting

Using lanes 1 to 8, the image is output with the pixel assignment given below without splitting the screen.

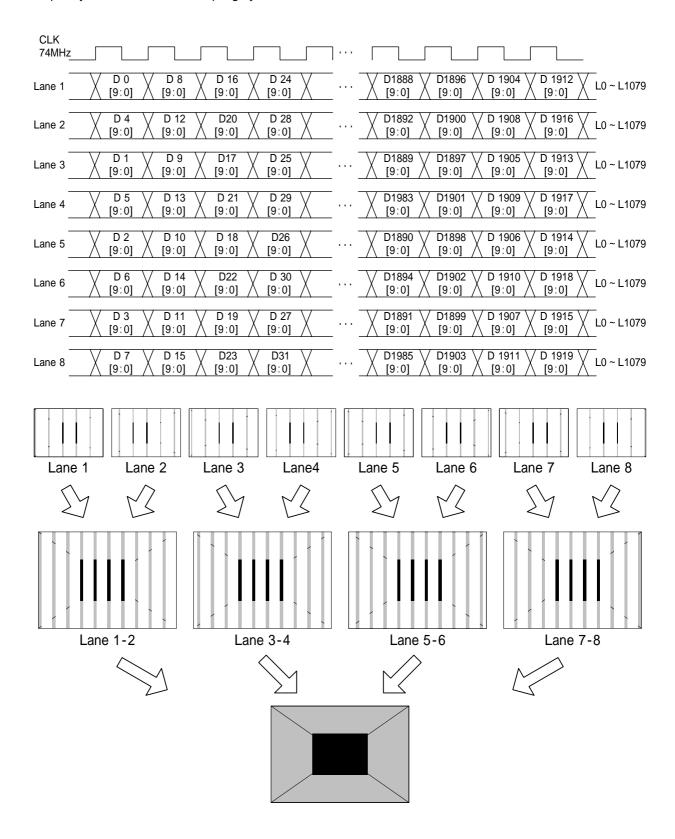


[2] MODE1 (8 Lane) - Normal Mode

Using lanes 1 to 8, the image is output with the pixel assignment given below without splitting the screen.

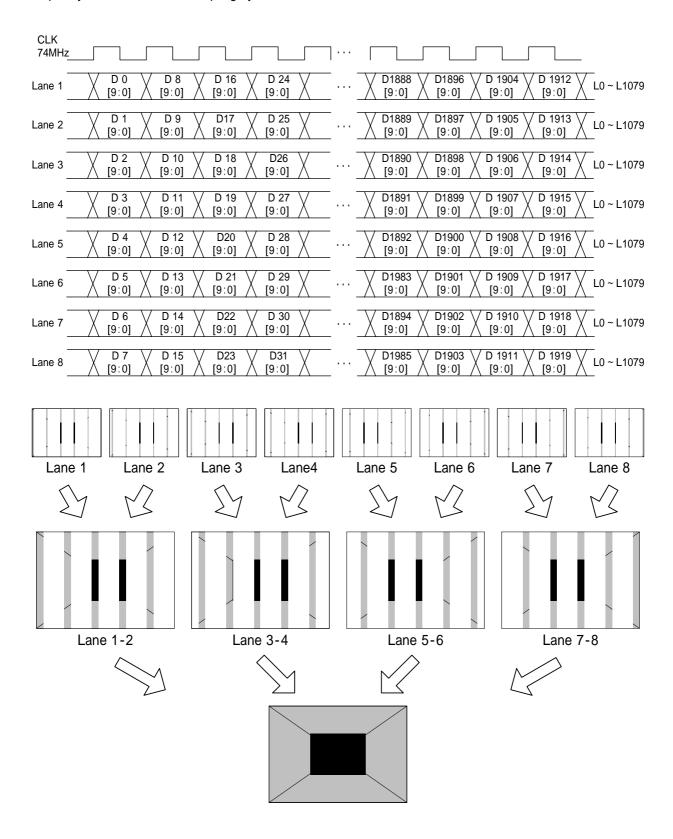


[3] MODE2 (8 Lane) - Cross Mode

Using lanes 1 to 8, the image is output with the pixel assignment given below without splitting the screen.

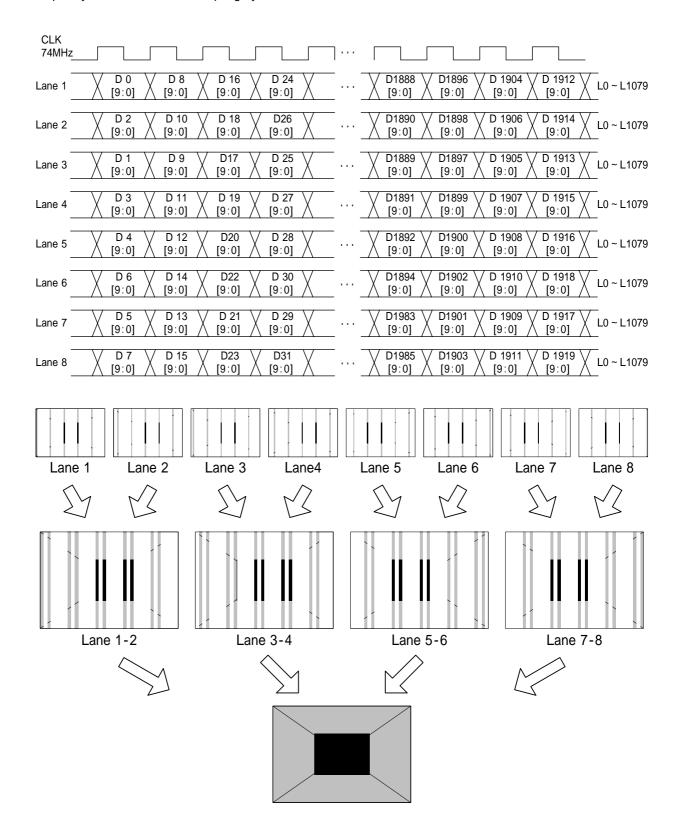


[4] MODE3 (8 Lane) - Dividing Normal Mode

Using lanes 1 and 2 and lanes 3 and 4, the left half of the image is output in the even and odd numbers; similarly, using lanes 5 and 6 and lanes 7 and 8, the right half of the image is output in the even and odd numbers.

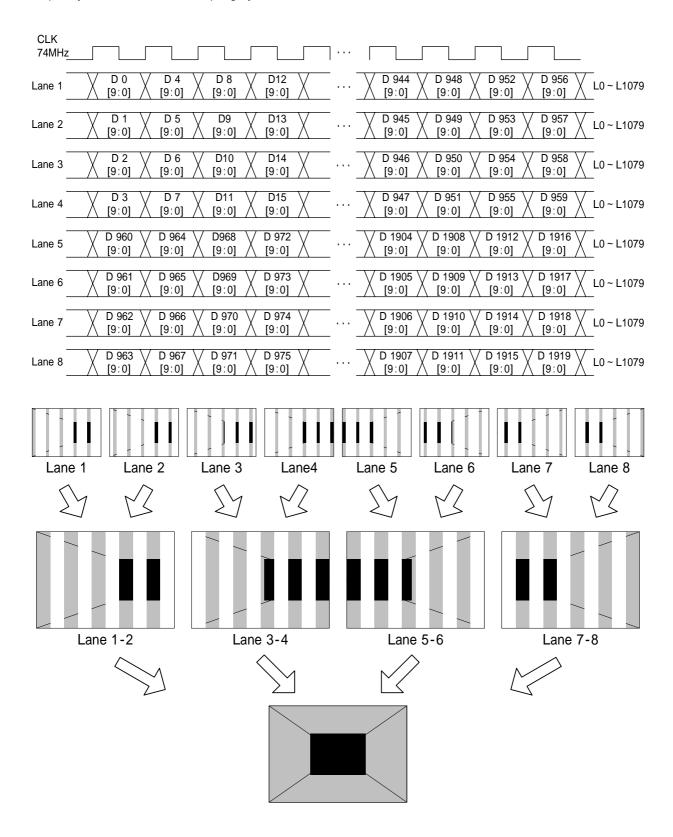

[5] MODE4 (8 Lane) - Dividing Cross Mode (same as 4K×2K MODE3)

Using lanes 1 and 3 and lanes 2 and 4, the left half of the image is output in the even and odd numbers; similarly, using lanes 5 and 7 and lanes 6 and 8, the right half of the image is output in the even and odd numbers.

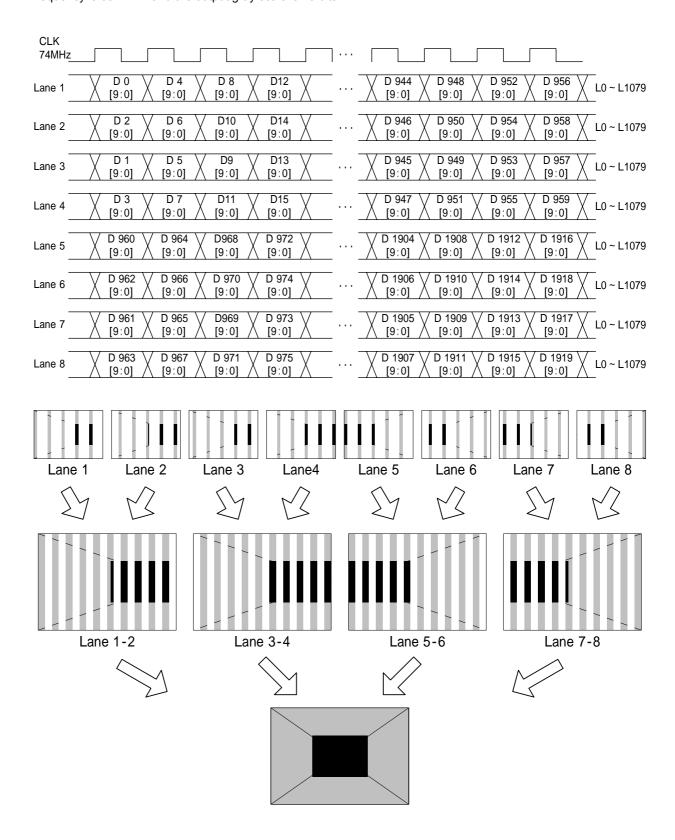

Specifications of 16-lane modes during VM-1825 2-board mode (4K×2K 120 Hz mode) output

This mode is an output mode designed for 4K×2K 120 Hz inspections.


During the 4K×2K 2-board mode output, 16 lanes are combined using two output boards to output one screen.


- * Described below in this section is a case where, in relation to the first VM-1825 board (lower level), the data is output as lanes 1 to 8.
- * Described below in this section is a case where, in relation to the second VM-1825 board (upper level), the data is output as lanes 9 to 16.


[4K×2K 120 Hz - 16-lane output]


[1st board output (lower level)]

[2nd board output (upper level)]

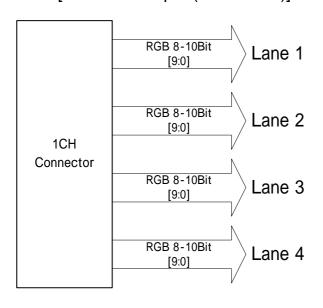

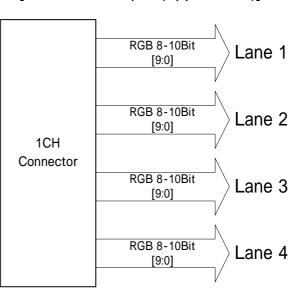


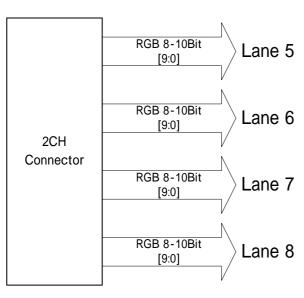

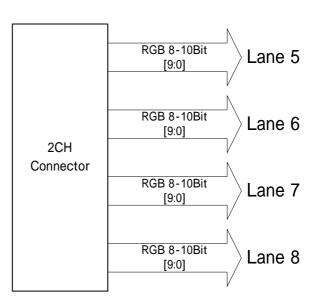


[1] MODE0 (16Lane) (screen split into 4 in the form of a square divided into 4 equal parts + screen vertically split into 2)

The screen is split it into 4 in the form of a square divided into 4 equal parts and output from each of the output boards, and then it is split vertically into 2 at each board, and output.

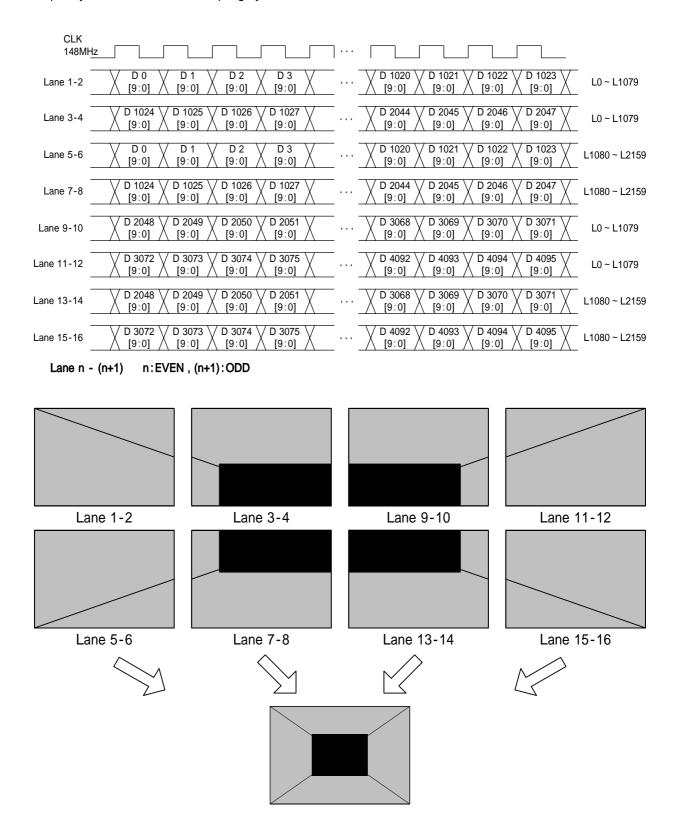


[2] MODE1 (16Lane) (screen vertically split into 4 + screen vertically split into 2)

The screen is split it into 4 in the form of a square divided into 4 equal parts and output from each of the output boards, and then it is split vertically into 2 at each board, and output.

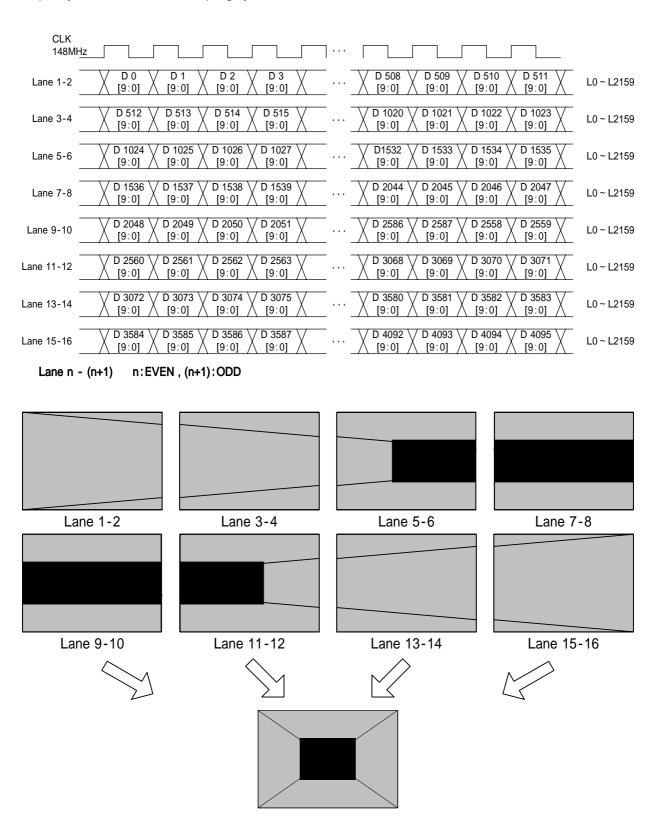


[3] MODE2 (16Lane) (screen horizontally split into 2 + screen vertically split into 2)

The screen is horizontally split it into 2 and output from each of the output boards, and then it is split vertically into 2 at each board, and output.

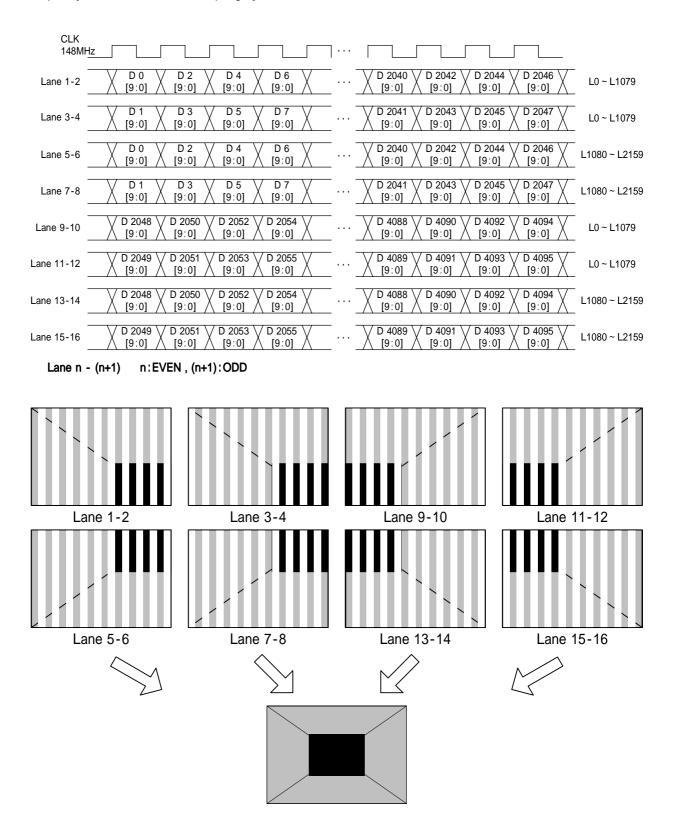

[4] MODE3 (16Lane) (screen split vertically into 2 + screen split vertically into 2)


Channels 1 to 8 are used. The screen is split vertically into 2 and output from each of the output boards, and then it is split vertically into two at each board, and output.

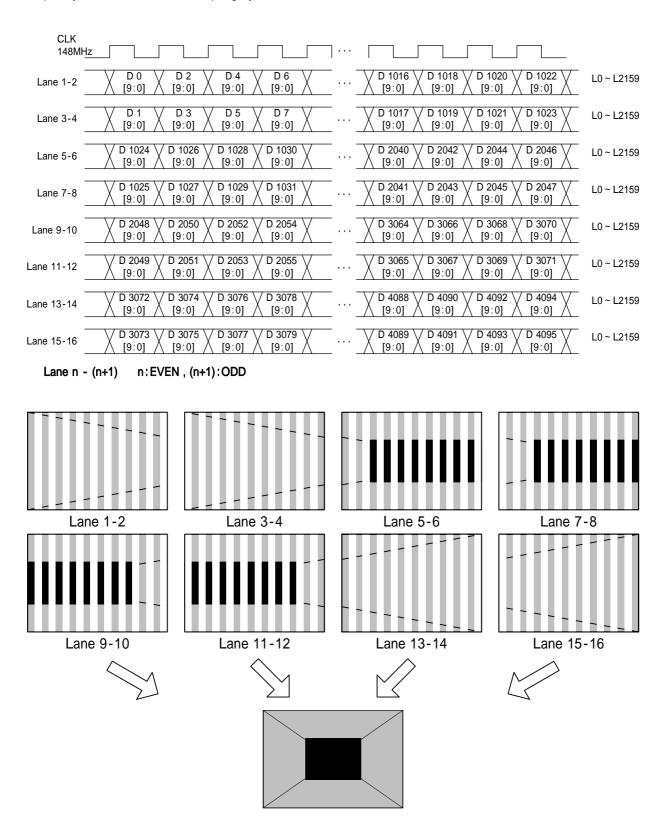


4.13.4 V-by-One HS Control

The VM-1825 makes it possible to control the V-by-One HS control signals (HTPDN and LOCKN).

<Operating procedure>



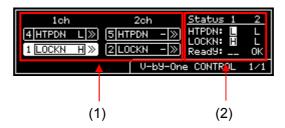

<Control parameters>

(1)	These parameters are used for channel 1 and channel 2 control.							
	- Through The signals from the receiver are passed straight through.							
	L	Forced Low	The signal is forcibly set to low.					
	H Forced High The signal is forcibly set to high.							
(2)	The current statuses of channel 1 and channel 2 are indicated here.							
		The statuses are displayed in solid white lettering against a black background if the signals have been forcibly set to low or high.						

4.14 SDI

4.14.1 Concerning the SDI output

Only timings complying with the SDI compatible standard (SMPTE) concerned are output as the SDI output. For details, refer to "11.1.11 SDI unit."

4.14.2 SDI setting procedure

(1)	Select Program Edit using or \triangle INC \bigcirc DEC, and then press .	MENU ProSram Edit ProSram Name : ►EIA1920x1080P360 Timin9 (TIM)
(2)	Select Output (TIM) using or or or and then press.	MENU OutPut All OutPut Analos OutPut Disital OutPut VBI Function OutPut >>> >>> >>> >>> >>> >>> >>>
(3)	Select Digital Output using or	MENU Digital OutPut DVI
(4)	Select DP using or ☐ or ☐ DEC, and then press ☐.	MENU SDI OutPut 1,2ch(0/1): →ON
(5)	Select the items using or $\stackrel{\triangle}{\longrightarrow}$ or $\stackrel{\bigcirc}{\longrightarrow}$, and then press .	For details on the parameters, refer to SDI unit setting parameters > on the next page.
	Select the parameters using or	

<SDI unit setting parameters>

(1)	Output 4 2ab (0/4)	Ть	is acts On ar Off for	each channel (The same acttings apply to channels 1			
(1)	Output 1,2ch (0/1) Output 3,4ch (0/1)		This sets On or Off for each channel. (The same settings apply to channels 1 and 2 and to channels 3 and 4.)				
	Output 3,4cm (0/1)		These are the same settings as in "4.1.1 Setting the output interfaces to ON				
			or OFF."				
		0	OFF	No output.			
		1	ON	Output.			
(2)	SDI Format (0-4)	Th	is sets the SDI forma	at.			
, ,		*	* The format which is supported differs depending on the timing. For				
			details, refer to "11				
		0	SD	SD-SDI			
		1	HD	HD-SDI			
		2	3G-A	3G-SDI. Level.A			
		3	3G-B	3G-SDI. Level.B			
		4	Dual	Dual-Link Dual-Link			
(3)	Video Format (0-2)	Th		ce of the images which are output from SDI.			
		*		is supported differs depending on the timing. For			
			details, refer to "11				
		0	RGB	RGB			
		1	YCbCr4:4:4	YCbCr4:4:4			
	187 141 (2.4)	2	YCbCr4:2:2	YCbCr4:2:2			
(4)	Width(0-4)		This sets the output image bit length. A setting which is independent				
			pattern drawing bit length can be selected or the same bit length as the pattern drawing bit length can be selected automatically.				
		*	* The portion of the pattern drawing bit length which exceeds the bit length				
				d. A deficient portion is filled with zeros.			
		Re	Refer to "4.1 Setting the bit length (gray scale) for pattern drawing."				
		*	* The format which is supported differs depending on the timing. For details, refer to "11.1.11 SDI unit."				
		_					
		0	Auto	Either 10 bits or 12 bits are selected automatically in accordance with the pattern			
				drawing bit length.			
		1	10bit	10-bit output			
		2	12bit	12-bit output			
(5)	Audio Output(0/1)	This sets the embedded audio output.					
,		*	* For details on the embedded audio settings, refer to "4.2.5 Embedded				
			audio, high bit rate	audio (option)."			
		0	OFF	The embedded audio is not output.			
		1	ON	The embedded audio is output.			
(6)	Payload		is sets the payload II				
			For further details, refer to <sdi data="" id="" parameters="" payload="" setting=""> in the</sdi>				
		ne	next section.				

<SDI payload ID data setting parameters>

* These settings are for the payload ID data only. For details of the settings which directly affect the transfer signals, refer to the respective items.

(1)	OFF/ON (0/1)	F/ON (0/1) This sets the payload ID data to ON or OFF.			
, ,		0	OFF	The payload ID data is not inserted.	
		1	ON	The payload ID data is inserted.	
(2)	Transport (0/1)	Th	is sets the transport sca	nning mode.	
		0	Interlace	Interlace scanning	
		1	Progressive	Progressive scanning	
(3)	Picture (0/1)	Th	is sets the image scanni	ing mode.	
		0	Interlace	Interlace scanning	
		1	Progressive	Progressive scanning	
(4)	Picture Rate(0-7)	Th	is sets the frame rate.		
		0	23.98Hz	The frame rate of each value is used as the	
		1	24Hz	setting.	
		2	25Hz		
		3	29.97Hz		
		4	30Hz		
		5	50Hz		
		6	59.94Hz		
		7	60Hz		
(5)	Aspect Ratio(0/1)	This sets the aspect ratio.			
		0	4:3	4:3 aspect ratio	
		1	16:9	16:9 aspect ratio	
(6)	H Y-Sampling (0/1)	This sets the Y sampling value.			
		0	0		
		1	1		
(7)	Sampling Struc(0-4)	Th	is set the sampling struc	cture (video format)	
		0	4:2:2(YCbCr)	The video format of each value is used as the	
		1	4:4:4(YCbCr)	setting.	
		2	4:4:4(RGB)		
		3	4:4:4:4(YCbCr+A)		
		4	4:4:4:4(RGB+A)		
(8)	Dynamic Range(0-2)	This sets the dynamic range.			
		0	100%	The dynamic range of each value is used as the	
		1	200%	setting.	
		2	400%		
(9)	Bit Depth(0-2)	Th	is sets the bit length.		
		0	8bit	The bit length of each value is used as the	
		1	10bit	setting.	
		2	12bit		

4.14.3 Embedded audio

The embedded audio can be output as the SDI output.

For details of the setting procedure, refer to "4.16 Digital audio."

4.15 Analog audio settings

4.15.1 Connectors and output signals



Connector	Signal
R	Audio right (R) channel
L	Audio left (L) channel


4.15.2 Analog audio signals

Analog audio signals can be output.

The operation procedure is described below.

- a) Set the analog audio to enabled.
- b) Set the sound source, frequency, level, etc.

a) Setting the analog audio to enabled

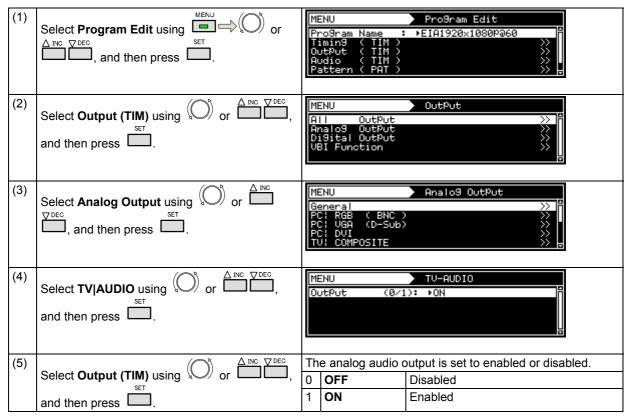

b) Setting the sound source, frequency, level, etc.

(1)	Select Program Edit using or or set and then press .	MENU ProSram Name : Timin9 (TIM) OutPut (TIM) Audio (TIM) Pattern (PAT)	Program Edit ►EIA1920×1080Pa60 >> >> >> >> >> >> >> >> >> >> >> >> >
(2)	Select Audio using or or or and then press.	MENU Analo9 Audio Di9ital Audio Audio SweeP	Audio
(3)	Select Analog Audio using or $\stackrel{\triangle \text{INC}}{\longleftarrow}$ or $\stackrel{\nabla \text{DEC}}{\longleftarrow}$, and then press $\stackrel{\text{SET}}{\longleftarrow}$.	MENU Frequency L R Level R	Analog Audio : > 1000Hz : 1000Hz : 0mV : 0mV
(4)	Select the items using or or DEC, and	Set the frequency	and level.
	Select the items using or, and then press	Frequency L	The left channel frequency is set. Setting range: 20 Hz to 20,000 KHz (20 Hz Step)
		Frequency R	The right channel frequency is set.
	Inputting the parameters>		Setting range: 20 Hz to 20,000 KHz (20 Hz Step)
	Select the parameters using or or or	Level L	The left channel level is set.
	, and then press .		Setting range: 0 to 4,000 [mV] (50 mV Step)
	Alternatively: Select the parameters using the number keys	Level R	The right channel level is set.
	o/status 9/F ऄ (Setting range: 0 to 4,000 [mV] (50 mV Step)

4.16 Digital audio

4.16.1 Digital audio

The embedded audio and high-bit-rate audio (HDMI only) can be superimposed and output from the HDMI and DisplayPort connectors. The high-bit-rate audio is optionally supported. For further details, contact an Astrodesign sales representative or your dealer.

The audio sources supported for each output are listed in the table below.

			Displa	ayPort	
Audio	Source	HDMI	TX versions preceding the ones on the right	TX version "CG V1.1.9" and later	SDI
Ext. Optical	External digital input (optical)	0	×	○ (Max. 96 kHz)	×
Ext. COAXIAL	External digital input (coaxial)	0	×	×	×
Ext. Analog to L-PCM	External analog input (L-PCM output)	0	×	×	×
Ext. Analog to DSD	External analog input (DSD output)	0	×	×	×
Int. L-PCM	Internal output (L-PCM)	0	×	○ (Max. 96 kHz)	○ (48 kHz)
Int. Non L-PCM	Internal output (non-L-PCM, memory incorporated)	Option	×	×	×
Int.L-PCM (Flash)	Internal output (non-L-PCM, memory incorporated)	Option	×	×	×
Int. DSD Internal output (DSD)		Option	×	×	×
Ext. I2S L-PCM	External I2S input (L-PCM)	Option	×	×	×
Ext. I2S Non L-PCM	External I2S input (non-L-PCM)	Option	×	×	×

[&]quot;O": Output supported

[&]quot;x": Output not supported (output is set to OFF even when it is selected)

[&]quot;Option": Optionally supported (For further details, contact an Astrodesign sales representative or your dealer.)

^{*} See "10.3 Information" to confirm the TX version. For more details on upgrading to a supported version, contact an Astrodesign sales representative or your dealer.

^{*} A maximum sampling rate of 96 kHz is supported by the DisplayPort connectors.

^{*} The sample rate with SDI outputs is a fixed 48 kHz for all the settings.

The operation procedure is described below.

Setting the sound source, frequency, level, etc.

(1)	Select Program Edit using or \triangle INC \bigcirc DEC, and then press .	MENU
(2)	Select Audio (TIM) using or	MENU Audio Analo9 Audio Di9ital Audio Audio Sweep Audio Sweep
(3)	Select Digital Audio using or or or and then press .	MENU Digital Audio Source (0-9): ▶Int.L-PCM SamPling Freq(0-6): 48kHz Width (0-2): 24bit OutPut Channel Frequency >>
(4)	Select Source using or or department of the press department. Inputting the parameters using or department of the parameters using department of the parameters using the number keys of the parameters using	Select the sound source <source/> . Depending on the selected sound source, the setting parameters associated with that source will differ.

<Source>

0	OFF	No output.			
1	Ext. Optical	The digital input (optical) is output. No parameters are provided. *			
2	Ext. COAXIAL	The digital input (coaxial) is output. No parameters are provided. *			
3	Ext. Analog to L-PCM	The analog input is converted to L-PCM, and output.			
		For further details, refer to <ext. analog="" l-pcm="" parameters="" setting="" to="">.</ext.>			
4	Ext. Analog to DSD	The analog input is converted to DSD, and output.			
		For further details, refer to <ext. analog="" dsd="" parameters="" setting="" to="">.</ext.>			
5	Int. L-PCM	Sine waves are output by the internal L-PCM.			
		For further details, refer to <int. l-pcm="" parameters="" setting="">.</int.>			
	Int. Non L-PCM	The sound of the non L-PCM stored in the internal memory is output.			
	.Option.	For further details, refer to <int. l-pcm="" non="" parameters="" setting="">.</int.>			
	Int.L-PCM(Flash)	The sound of the L-PCM stored in the internal memory is output.			
	.Option.	For further details, refer to <int.l-pcm(flash) parameters="" setting="">.</int.l-pcm(flash)>			
	Int. DSD	The sound of the DSD stored in the internal memory is output.			
	.Option.	For further details, refer to <int. dsd="" parameters="" setting="">.</int.>			
	Ext. I2S L-PCM	The non L-PCM input from the I2S connector is output.			
	.Option.	For further details, refer to <ext. i2s="" l-pcm="" parameters="" setting="">.</ext.>			

Ext. I2S Non L-PCN	The L-PCM input from the I2S connector is output.	
.Option.	For further details, refer to <ext. i2s="" l-pcm="" non="" parameters="" setting="">.</ext.>	

* When selecting **Ext.Optical** or **Ext.Coaxial** as the **sound source setting**, select the setting after inputting stable signals. (Check the sampling frequency of the input audio signals only after selecting the setting.)

Described below are the setting parameters associated with each sound source.

<Ext. Analog to L-PCM setting parameters>


	Setting menu display	ME	ENU Digi	tal Audio	
		Source (0-9): ▶Ext.ANALOG to L-PCM SamPlin9 Fre9(0-6): 48kHz OutPut Channel >>			
(1)	Sampling Frequency	Se	t the sampling frequency		
	(0-6)	0	32 KHz	This is for sampling at a 32 kHz frequency.	
		1	44.1 KHz	This is for sampling at a 44.1 kHz frequency.	
		2	48 KHz	This is for sampling at a 48 kHz frequency.	
		3	88.2 KHz	This is for sampling at a 88.2 kHz frequency.	
		4	96 KHz	This is for sampling at a 96 kHz frequency.	
		5	176.4 KHz	This is for sampling at a 176.4 kHz frequency.	
		6	192 KHz	This is for sampling at a 192 kHz frequency.	
(2)	Output Channel	Wi he		for channel 1 to 8 of the embedded audio is set	
		ME	ENU Outp	ut Channel	
		1ch (0/1): ▶0N 2ch (0/1): ON 3ch (0/1): OFF 4ch (0/1): OFF 5ch (0/1): OFF 6ch (0/1): OFF 7ch (0/1): OFF 8ch (0/1): OFF 5ch (0			
		0	OFF	No output.	
		1	ON	With channels 1, 3, 5 and 7: The left-channel input is output. With channels 2, 4, 6 and 8: The right-channel input is output.	

<Ext. Analog to DSD setting parameters>


	Setting menu display	MENU Digital Audio Source (0-9): ►Ext. ANALOG to DSD SamPling Freq(-): 44.1kHz OutPut Channel >>		
(1)	Output Channel	Whether to set ON or OFF for channel 1 to 8 of the embedded audio is set here. MENU		
		0 OFF No output.		
		1 ON With channels 1, 3, 5 and 7: The left-channel input is output. With channels 2, 4, 6 and 8: The right-channel input is output.		

<Int. L-PCM setting parameters>

	Setting menu display	0 0 0	ource (0-9): ⊧Ir	ital Audio tt.L-PCM i.ikHz ibit >>> >>> >>> >>>
(1)	Sampling Frequency	Th	is sets the sampling free	quency.
	(0-6)	0	32 KHz	This outputs the signals at a 32 kHz sampling frequency.
		1	44.1 KHz	This outputs the signals at a 44.1 kHz sampling frequency.
		2	48 KHz	This outputs the signals at a 48 kHz sampling frequency.
		3	88.2 KHz	This outputs the signals at a 88.2 kHz sampling frequency.
		4	96 KHz	This outputs the signals at a 96 kHz sampling frequency.
		5	176.4 KHz	This outputs the signals at a 176.4 kHz sampling frequency.
		6	192 KHz	This outputs the signals at a 192 kHz sampling frequency.
(2)	Width (0-2)		is sets the bit length of t	
		0	16 BIT	The audio data is output with 16 bits.
		1	20 BIT	The audio data is output with 20 bits.
(3)	Output Channel	2	24 BIT	The audio data is output with 24 bits. for channels 1 to 8 of the embedded audio is set
		30 50	ch (0/1): ▶ON 2c ch (0/1): OFF 4c ch (0/1): OFF 6c ch (0/1): OFF 8c	h (0/1): ON
		0	OFF	No output.
		1	ON	Output.
(4)	Frequency			ne wave) of the audio signals to be output.
		10	ch: 1000Hz 2ccch: 1000Hz 4ccch: 1000Hz 6cccch: 1000Hz 8cccch: 1000Hz 8cccch: 1000Hz 8cccch: 1000Hz 8cccch: 1000Hz	h: 1000Hz E
		20	- 96000	A frequency up to half the value of the sampling frequency can be set. Example: When the sampling frequency is 48 kHz This sets a frequency in the 20 Hz to 24 kHz ranges
(5)	Level InpMode	Th	is sets the level input me	ethod.
		0	dB (1-8ch All)	This sets all the channels 1 to 8 as a dB display. Setting range: -138.48 to 0.00 [dB] MENU Di9ital Audio Width (0-2): 16bit OutPut Channel Sheep Channel

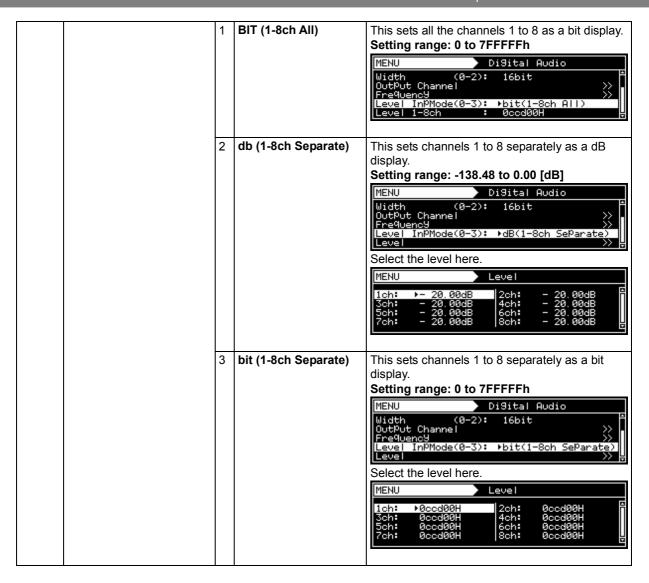


<Int. Non L-PCM setting parameters> (Option)

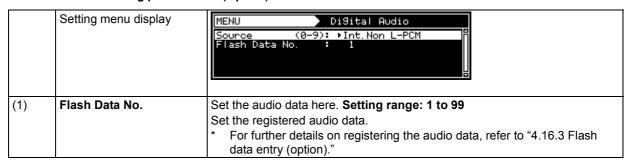

<Int.L-PCM(Flash) setting parameters> (Option)

	Setting menu display	MENU Di9ital Audio Source (0-A): ►Int.L-PCM(Flash) Flash Data No. : 1
(1)	Flash Data No.	Set the audio data here. Setting range: 1 to 99 Set the registered audio data. * For further details on registering the audio data, refer to "4.16.3 Flash data entry (option)."

<Int. DSD setting parameters>

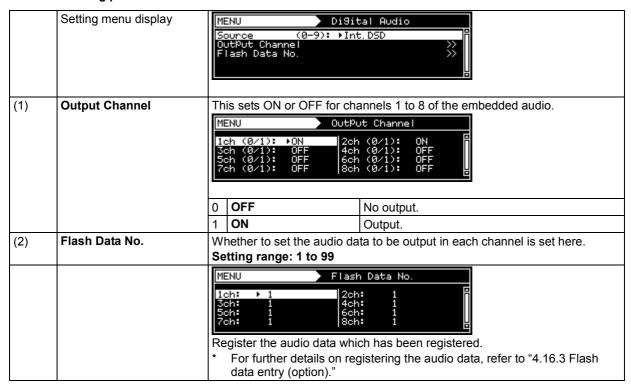

<Ext. I2S L-PCM setting parameters> (Option)

(1)	Setting menu display Sampling Frequency	MENU Digital Audio Source (0-9): ▶Ext.I2S L-PCM SamPling Freq(0-6): 48kHz Width (0-2): 24bit OutPut Channel >> SCLK Edge (0/1): Rise 5			
(1)	(0-6)	0	32 KHz	of the audio signals which are input here. The signals are input/output with a 32 kHz sampling frequency.	
		1	44.1 KHz	The signals are input/output with a 44.1 kHz sampling frequency.	
		2	48 KHz	The signals are input/output with a 48 kHz sampling frequency.	
		3	88.2 KHz	The signals are input/output with a 88.2 kHz sampling frequency.	
		4	96 KHz	The signals are input/output with a 96 kHz sampling frequency.	
		5	176.4 KHz	The signals are input/output with a 176.4 kHz sampling frequency.	
		6	192 KHz	The signals are input/output with a 192 kHz sampling frequency.	
(2) Width (0-2) This sets the bit length of the audio data which is input. (Only the status bits are set.)			e audio data which is input. (Only the channel		
		0	16 BIT	The data is input/output as 16 bits.	
		1	20 BIT	The data is input/output as 20 bits.	
		2	24 BIT	The data is input/output as 24 bits.	

(3)	Output Channel	Whether to set the audio data which is input to channels 1 to 8 to ON or OFF is set here.			
		ME	ENU Outpu	ut Channel	
		3ch (0/1): OFF 4ch 5ch (0/1): OFF 6ch		(0/1): ON (0/1): OFF (0/1): OFF (0/1): OFF	
		0	OFF	The data is not input/output.	
		1	ON	The data is input/output.	
(4)	SCLK Edge (0/1)	The SCLK edge at which the I2S data is to be captured is set here.			
		0 Rise The data is captured at the SCLK rising edge.			
		1	Fall	The data is captured at the SCLK falling edge.	

<Ext. I2S Non L-PCM setting parameters> (Option)

	Setting menu display	MENU Di9ital Audio Source (0-9): ▶Ext.I2S Non L-PCM SamPlin9 Freq(0-A): 48kHz SCLK Ed9e (0/1): Rise		
(1)	Sampling Frequency (0-A)	The sampling frequency of the audio signals which are input is set here.		
		0	32 KHz	The signals are input/output with a 32 kHz sampling frequency.
		1	44.1 KHz	The signals are input/output with a 44.1 kHz sampling frequency.
		2	48 KHz	The signals are input/output with a 48 kHz sampling frequency.
		3	88.2 KHz	The signals are input/output with a 88.2 kHz sampling frequency.
		4	96 KHz	The signals are input/output with a 96 kHz sampling frequency.
		5	176.4 KHz	The signals are input/output with a 176.4 kHz sampling frequency.
		6	192 KHz	The signals are input/output with a 192 kHz sampling frequency.
		7	352.8 KHz	The signals are input/output with a 352.8 kHz sampling frequency.
		8	384 KHz	The signals are input/output with a 384 kHz sampling frequency.
		9	705.6 KHz	The signals are input/output with a 705.6 kHz sampling frequency.
		Α	768 KHz	The signals are input/output with a 768 kHz sampling frequency.
(2)	SCLK Edge (0/1)	The SCLK edge at which the I2S data is to be captured is set here.		
		0	Rise	The data is captured at the SCLK rising edge.
		1	Fall	The data is captured at the SCLK falling edge.


4.16.2 Audio sweep settings

When **Internal PCM** has been selected by the **Digital Audio > Source** setting, the audio sweep function can be used, and the audio output frequency is incremented at the specified interval.

For further details on the audio sweep settings, refer to "4.1.9 Audio sweep settings."

4.16.3 Flash data entry (option)

Audio data (VT-8500-0006/0008, etc.) can be stored in the VG-870B/871B.

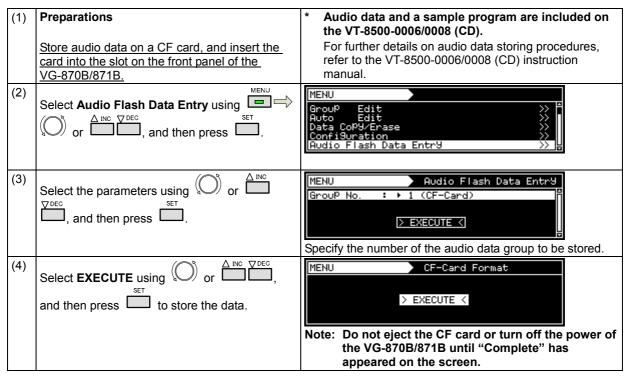

^{*} Groups of audio data up to 64MB created using the SP-8870 can be stored in the VG-870B/871B.

4.17 Audio sweep setting

For details on the audio sweep settings, refer to "4.1.9 Audio sweep settings."



FUNCTIONS AVAILABLE WITH TV STANDARD SIGNALS

Text, data, copy prevention information and other data are superimposed in the vertical blanking interval (VBI) of the NTSC, PAL and SECAM TV standard signals, and transmitted as multiplexed broadcasts.

The VG-870B supports the following functions.

- (1) Macrovision (Option)
- (2) Closed caption/V-Chip
- (3) Teletext
- (4) WSS
- (5) CGMS-A/ID-1

The TV standard signals and functions supported are summarized in the table below.

	Macrovision	Closed caption V-chip	Teletext	WSS	CGMS-A ID-1
NTSC-J	0	0	-	-	0
NTSC-M	0	0	-	-	0
NTSC-443	0	0	-	-	0
PAL-M	0	-	-	-	0
PAL-60	0	-	-	-	0
PAL(-BDGHIK)	0	-	0	0	-
PAL-N	0	-	-	0	-
PAL-Nc	0	-	-	0	-
SECAM	0	-	-	0	-

^{*} Macrovision, closed caption (V-Chip) and Teletext cannot be executed concurrently.



The Macrovision, Closed caption (V-Chip) and Teletext functions cannot be executed at the same time.

5.1 Macrovision

5.1.1 Description and specifications

■ What is "Macrovision"?

Macrovision is a copy prevention system developed by Macrovision Corporation.

Widely used by video sources such as VHS and DVD-Video on the market and by satellite broadcasts, for instance, the system ensures that, by causing the automatic gain control (AGC) of the video decks to malfunction, users will not be able to record properly the video output sources which are protected by the system.

The AGC circuit is designed to adjust the gain of the input signals automatically and maintain the appropriate sensitivity, and almost all consumer-use VTRs now feature it. It serves to make dark images a little brighter and excessively light images darker and keep them this way.

While keeping the luminance and chrominance signal components of the video signals unchanged, Macrovision's copy prevention signals cause the AGC to malfunction by mixing signals with non-standard levels in the vertical blanking interval. This is why the brightness of the images will fluctuate even when the images are recorded. These signals also have the effect of causing trouble for the sync signals and disturbances in the images.

The trouble caused ensures that content is unwatchable even when it has been copied.

■ What does the "color stripe" function do?

This function is part of the Macrovision standard, and it provides color stripes to overlap with the regular Macrovision signals.

It constitutes a method of superimposing the modulated color burst signal onto the video signals, and it is also referred to as a means of color burst copy prevention.

The color stripe function inserts thin horizontal lines into the copied images and, like the Macrovision system, it makes the images unwatchable.

* The color stripes are provided only in the Type 2 and 3 modes of the NTSC-M and J systems.

■ Macrovision specifications

Macrovision supports the TV signals of the following systems.

Its signals are superimposed onto the composite signals and Y/C signals.

- NTSC-M, NTSC-J, NTSC-443
- PAL-60, PAL, PAL-M, PAL-N, PAL-Nc
- SECAM



- Macrovision is an option. Contact an Astrodesign sales representative or your dealer
- The Macrovision signals have different effects depending on the type of VHS or DVD player used. When using the system, be absolutely sure to check the terms and conditions of the agreement with Macrovision Corporation.

5.1.2 Setting procedure

(1)	Select Program Edit using or \triangle inc ∇ DEC, and then press.	MENU ProGram Edit ProGram Name : ►NTSC-M Timin9 (TIM)
(2)	Select Output using or or or and then press.	MENU OutPut All OutPut Analog OutPut Digital OutPut VBI Function OutPut >>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>
	Select VBI Function using or or or and then press .	MENU VBI Function Macrovision Closed Caption V-Chip Teletext WSS WEST WEST
	Select Macrovision using or	MENU Macrovision Mode (0-5): Mai
(5)	Select Mode using \bigcirc or $\stackrel{\triangle \text{INC}}{\longrightarrow}$ $\stackrel{\nabla \text{DEC}}{\longrightarrow}$, and	The selection options for Mode differ depending on the TV signals.
	then press .	(OFF is set for any timing format not listed below.)
		NTSC-M
		0 OFF
	Alternatively:	1 Type1 (AGC only)
	Make the selections using the number keys O/STATUS 9/F & SET	2 Type2 (AGC + 2Line Colorstripe)
	(to), and then press .	3 Type3 (AGC + 4Line Colorstripe) 4 VHS USA
		5 VHS US obs.
		NTSC-J
		0 OFF
		1 Type1 (AGC only)
		2 Type2 (AGC + 2Line Colorstripe)
		3 Type3 (AGC + 4Line Colorstripe)
		4 VHS Japan1
		5 VHS Japan2
		NTSC-443, PAL-60, PAL-M
		0 OFF
		1 Type1,2,3 (AGC only)
		PAL, PAL-N, PAL-Nc, SECAM
		0 OFF
		1 Type1,2,3 (AGC only)
	MENUL	2 VHS
	MENU	Display returns to the initial screen.

5.2 Closed captions/V-Chip

5.2.1 Description and specifications

■ What does the closed caption (CC) function do?

Closed captioning was developed in the United States, and it provides broadcasts with subtitles for the hearing impaired so that people who are deaf or hard of hearing can enjoy movies and news programs.

The captions are "closed" in the sense that they are not displayed on the screen during normal playback. Conversely, the Japanese-language subtitles and other such characters used with video content which are "burned into" the images from the start are referred to as "open captions."

Although closed captioning was originally developed as a technology for the hearing impaired, it is currently attracting the attention of educators and language learners as a tool which helps develop "listening."

The CC subtitle data is superimposed onto line 21 (first field) and line 284 (second field) of the NTSC output signals, and output. The subtitle data has two modes, captions and text. Another available service is the Extended Data Service (EDS) which transmits titles, ratings and other program information using line 284 (second field). The V-Chip described below uses the EDS function.

A total of 32 characters can be displayed per line by CC. There are 15 lines, but the maximum number of lines is limited to 4 in the caption mode (CC1 to 4). All 15 lines can be displayed in the text mode (T1 to 4).

■ What does the V-Chip do?

The V-Chip refers to a semiconductor chip that blocks out TV programs containing violence, bad language and sex situations. "V" refers to violence, and the viewing of programs is blocked out according to the ratings which are categorized by the extremity of the program content. Once the ratings are set in a receiver (TV set) which incorporates the V-Chip function, the rating information of EDS is decoded, and whether the programs are to be output to the screen is automatically determined.


■ Specifications of closed caption/V-Chip

Closed caption/V-Chip supports the TV signals of the following systems.

Closed caption/V-Chip is superimposed onto the composite signals and Y/C signals.

• NTSC-M, NTSC-J, NTSC-443

The closed caption/V-Chip waveform is shown below. Following the color burst come a sine wave known as Clock Run-In and then the start bit. The start bit is always "001." Two bytes of data (Char1, Char2) are sent for each line. Char1 and Char2 are decoded from LSB, and an odd parity is usually added to MSB (bit 8).

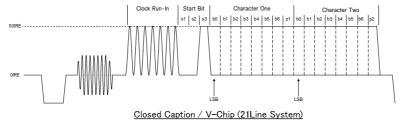

5.2.2 Closed caption settings

(1)	Select Program Edit using or \triangle inc \bigcirc DEC, and then press .	MENU Pro9ram Edit Pro9ram Name : ▶NTSC-M Timin9 (TIM)
(2)	Select Output using or or or and then press.	MENU OutPut All OutPut Analos OutPut Disital OutPut VBI Function OutPut
(3)	Select VBI Function using or or or or and then press.	MENU VBI Function Macrovision SYPU-Chip SYPU-
(4)	Select Closed Caption using or	MENU Closed CaPtion Mode (0-9): ▶OFF Interval : 1s
(5)	Selecting the setting items from the table> Select the parameters using SET or and then press	For details on the setting items and parameters, refer to Table of closed caption setting items> provided below.
(6)	Select the parameters using or	
	Upon completion of the settings: Press	Display returns to the initial screen.

<Table of closed caption setting items>

(1)	Mode (0-9)	The mode	e is set here.	
		0	OFF	The captions are set to OFF.
		1	CC1	Closed caption mode 1 is selected here.
		2	CC2	Closed caption mode 2 is selected here.
		3	CC3	Closed caption mode 3 is selected here.
		4	CC4	Closed caption mode 4 is selected here.
		5	T1	Text data mode 1 is selected here.
		6	T2	Text data mode 2 is selected here.
		7	Т3	Text data mode 3 is selected here.
		8	T4	Text data mode 4 is selected here.
		9	USER Data	The user data is selected here. Up to 20 user data can be registered using SP-8870.
(2)	Interval	0 to 60	Interval	The interval at which the closed caption data is transmitted is set. (in 1-second increments)
(3)	USER Data No.	1 to 20		The user data number is set. This is valid when USER Data has been selected as the Mode setting in (1).

Listed below are the types of closed caption services available.

- **CC1** Primary Synchronous Caption Service (caption service for primary language)
- CC2 Special Non-Synchronous Use Caption (service which does not need to be synchronized with the sound, etc.)
- **CC3** Secondary Synchronous Caption Service (caption service for secondary language)
- **CC4** Special Non-Synchronous Use Caption (service which does not need to be synchronized with the sound, etc.)
- **T1** First Text service (text service)
- T2 Second Text service (text service)
- T3 Third Text service (text service)
- **T4** Fourth Text service (text service)

■ The content of Closed caption internal data (1/3)

Service	Caption style, Line, Color, Option setting, etc	Character
CC1 - CC4		Primary Synchronous Caption Service CC1 (CC1) Secondary Synchronous Caption Service CC2 (CC2) Special Non-Synchronous Use Captions CC3 (CC3)
	Roll-up3 ROW10 Background: blue, transparence Text: yellow	Special Non-Synchronous Use Captions CC4 (CC4) Roll-up Style characters are always displayed immediately. Each time a Carriage Return is received, the text is scrolled up one row.
	Roll-up4 ROW15, indent Background: cyan, transparence Text: Red	Standard characters 0123456789 ABCDEFGHIJ áàâçéèêíîÑñóôúû !,;;;7"#% &@/() []+-÷<=>? Music note, solid block, Transparent space,solid block, Music note, solid block, Transparent space
	Pop-on ROW1 ROW2 ROW3 Background: red, half transparence Text: cyan	Pop-on Style Caption data are loaded into a non-displayed memory.
	Pop-on ROW4 ROW5 ROW6 Background: green, half transparence Text: blue, flash	End of Caption command (EOC) "flips" displayed and non displayed memory.
	Pop-on ROW7 indent ROW8 indent ROW9 indent Background: magenta, non transparence Text: green, italic	АВСDEFGHIJ 0123456789 Å å Ø ø _П Ц


■ The content of Closed caption internal data (2/3)

Service	Caption style, Line, Color, Option setting, etc	Character
CC1 - CC4	Pop-on ROW12 indent ROW13 indent ROW14 indent ROW15 indent Background: white, non transparence Test: red, underline	ÁÉÓÚÜü, opening single quote, inverted exclamation mark ÀÂÇÈÊËĕÎĬïÔÙùÛ«» ÃãÍÌÌÒòÕõ{}∖^_ ~ ÄäÖöߥ¤
	Paint-on ROW1 ROW3 ROW4 ROW6 ROW7 ROW9 Background: yellow, half transparence Text: blue	Paint-on Style Characters are always displayed immediately. Characters on next row will be erased by Backspase. ABCDEFGH (A to H is deleted by Backspase)
	Paint-on ROW5 ROW6 ROW7 ROW8 ROW9 ROW10 ROW12, indent ROW14, indent Background: yellow, half transparence Text: blue	Once the cursor reaches the 32nd column position on any row, all subsequent characters will be displayed In thet column replaceing any previous character. ABCDEFGHIJKLMNOPQRSTUVWXYZ (S to Y are replaced by Z) Abcdefghijklmnopqrstuvwxyz (n to y are replaced by z)
T1		First Text Service T1 Text Mode is a data service, generally not program related, which may be transmitted using either field of line21. Text Mode data are always displayed as soon as they are received and are intended to be displayed in a manner which isolates them from the video program used to transmit the data. Once the display window is filled these data are always scrolled upward through the display window provided by the decoder.
T2		Second Text Service T2 ABCDEFGHIJKLMNOPQRSTUVWXYZ abcdefghijklmnopqrstuvwxyz 012345678901234567890 !"#\$%&'()á+,/ :;<=>?@[é]íóú *© SM •□"¥

■ The contents of Closed caption internal data (3/3)

Service	Caption style, Line, Color, Option setting, etc	Character
T3		Third Text Service T3
		A Text Mode may be used that
		consists of data formatted to
		fill a box which in height is
		not less than 7 rows and not
		more than 15 rows (all of which
		should be contiguous), and in
		width is not less than
		32 columns. Text should be
		displayed over a solid
		background to isolate it from
		the unrelated program video.
		Each row of text contains
		maximum of 32 characters.
T4		Fourth Text Service T4
		ABCDEFGHIJKLMNOPQRSTUVWXYZ
		abcdefghijklmnopqrstuvwxyz
		012345678901234567890
		!"#\$%&'()á+,/
		:;<=>?@[é]íóú
		*© SM •□"¥

5.2.3 V-Chip settings

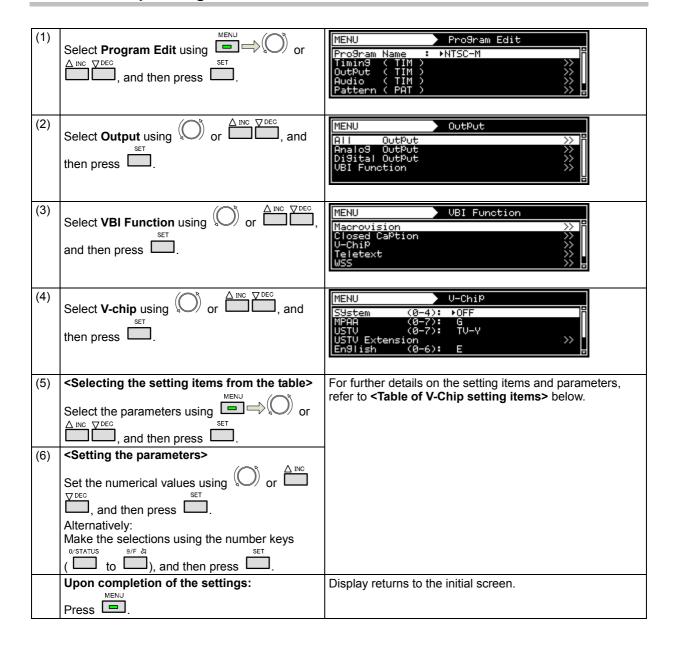

<Table of V-Chip setting items>

(1)	System (0-4)	The rating system is selected here.		
		0 OFF		The V-Chip is set to OFF here.
		1 MPAA		MPAA is set here.
		2 U.S.TV		U.S.TV is set here.
		3	English	Canadian English is set here.
		4	French	Canadian French is set here.

The names of the rating systems and a brief description of each are presented below.

MPAA: Motion Picture Association of America

This organization was set up in order to promote the spread of American movies. It is active in many fields such as promoting exports overseas and cracking down on pirated movies. On the U.S. domestic front, it helps viewers exercise voluntary controls by establishing a rating system for violence, sexual content and discriminatory content, for example. Its rating standards are strict and its screening targets images and language that would hardly raise an eyebrow in Japan.

U.S.TV: U.S. TV Parental Guideline Rating System

This rating system is incorporated in ordinary TV sets installed in American homes.

English: Canadian English Language Rating System

This rating system targets Canadian English.

French: Canadian French Language Rating System

This rating system targets Canadian French.

(2)	MPAA		These ratings which apply when MPAA has been selected as the System setting in (1) above are set here.			
		0	G	"General Audience" is set as the MPAA rating.		
			PG	"Parental Guidance" is set as the MPAA rating.		
			PG-13	"Parents Strongly Cautioned" is set as the MPAA rating.		
		3	R	"Restricted" is set as the MPAA rating.		
		4	NC-17	"No One 17 and Under Admitted" is set as the MPAA rating.		
		5	Х	"Adult Movie" is set as the MPAA rating.		
		6	Not Rated	"Not Submitted For MPAA Review" is set as the MPAA rating.		
		7	N/A	"N/A" is set as the MPAA rating.		

The names and descriptions of the MPAA ratings are presented below.

G: General Audience

For general audiences.

PG: Parental Guidance

Contains scenes unsuitable for young children.

PG-13: Parents Strongly Cautioned

Contains scenes unsuitable for children aged 13 and under.

R: Restricted

Permission of a parent or guardian required for children up to 17 years of age.

NC-17: No One 17 and Under Admitted

Cannot be viewed by anyone aged 17 years and under.

X: Adult Movie

For adults only.

Not Rated

Not Submitted For MPAA Review

N/A

No applicable restrictions

(3)	U.S.TV	These ratings which apply when U.S.TV has been selected as the System setting in (1) above are set here.				
		0 TV-Y	"All children" is set as the U.S.TV rating.			
		1 TV-Y7	"Directed to older children" is set as the U.S.TV rating.			
		2 TV-G	"General Audience" is set as the U.S.TV rating.			
		3 TV-PG	"Parental Guidance Suggested" is set as the U.S.TV rating.			
		4 TV-14	"Parents Strongly Cautioned" is set as the U.S.TV rating.			
		5 TV-MA	"Mature Audience Only" is set as the U.S.TV rating.			
		6 Not Rated 1	"Not Rated" is set as the U.S.TV rating. (Code = 000)			
		7 Not Rated 2	"Not Rated" is set as the U.S.TV rating. (Code = 111)			
(4)	USTV Extension	depending on the U	The extension bits for U.S. TV are set. The bits which can be set differ depending on the U.S. TV ratings. For further details, refer to "U.S. TV rating system extension bit settings."			

The names of the U.S. TV ratings and a description of each are presented below.

TV-Y: All children

Suitable for all children.

TV-Y7: Directed to older children

Suitable for children aged 7 and above.

TV-G: General Audience

Suitable for audiences of all ages (must not contain violent scenes, objectionable language or sexual content).

TV-PG: Parental Guidance Suggested

Contains scenes involving some violence and sexual content unsuitable for young children or situations that may induce foul language or incite delinquency.

TV-14: Parents Strongly Cautioned

Contains scenes involving violence and sexual content unsuitable for children aged 14 or below or situations that may induce foul language or incite delinquency.

TV-MA: Mature Audience Only

For adults only; programs with this rating are hardly ever broadcast.

Not Rated1/2

No applicable restrictions

[U.S. TV rating system extension bit settings]

	FV	V	S	L	D
TV-Y	Cannot be set.				
TV-Y7	0: - / 1: *	Cannot be set.			
TV-G	Cannot be set.				
TV-PG	Cannot be set.	0: - / 1: *	0: - / 1: *	0: - / 1: *	0: - / 1: *
TV-14	Cannot be set.	0: - / 1: *	0: - / 1: *	0: - / 1: *	0: - / 1: *
TV-MA	Cannot be set.	0: - / 1: *	0: - / 1: *	0: - / 1: *	Cannot be set.
Not Rated 1	Cannot be set.				
Not Rated 2	Cannot be set.				

^{* &}quot;-" denotes OFF, and "*" ON.

The names of the U.S. TV rating extension service ratings and a description of each are presented below.

FV: Fantasy Violence

Acts of fantasy violence = violence in animated features and comics.

V: Violence

Violence

S: Sexual Situations

Sexual content

L: Adult Language

Foul language

D: Sexually Suggestive Dialog

Sexually suggestive dialog

(5)	English		These ratings which apply when English has been selected as the System setting in (1) above are set here.		
			E	"Exempt" is set as the English rating.	
			С	"Children" is set as the English rating.	
			C8+	"Children eight years and older" is set as the English rating.	
		3	G	"General Programming, suitable for all audiences" is set as the English rating.	
		4	PG	"Parental Guidance" is set as the English rating.	
		5	14+	"Viewers 14 years and older" is set as the English rating.	
		6	18+	"Adult Programming" is set as the English rating.	

The names of the Canadian English ratings and a description of each are presented below.

E: Exempt

No age restrictions apply.

C: Children

Programming may be viewed by all children.

C8+: Children eight years and older

Programming may be viewed by children aged 8 and above.

G: General Programming, suitable for all audiences

General programming

PG: Parental Guidance

Permission of a parent required to view programming.

14+: Viewers 14 years and older

Programming may be viewed by children 14 years and older.

18+: Adult Programming

Programming for adults only.

(6) Frenc	French		These ratings which apply when French has been selected as the System setting in (1) above are set here.			
		0 E	"Exempt" is set as the French rating.			
		1 G	"General" is set as the French rating.			
		2 8ans+	"Not recommended for young children" is set as the French rating.			
		3 13ans+	"Programming may not be suitable for children under 13" is set as the French rating.			
		4 16ans+	"Programming is not suitable for children under 16" is set as the French rating.			
		5 18ans+	"Programming restricted to adults" is set as the French rating.			

The names of the Canadian French ratings and a description of each are presented below.

E:Exempt

No age restrictions apply.

G:General

General programming.

8ans+: Not recommended for young children

Programming unsuitable for young children

13ans+: Programming may not be suitable for children under 13

Programming unsuitable for children aged 13 and under

16ans+: Programming is not suitable for children under 16

Programming unsuitable for children aged 16 and under

18ans+: Programming restricted to adults

Programming for adults only.

(7)	Interval	0 to 60	Interval	The interval at which the V-chip data is
				transmitted is set. (in 1-second increments)

5.3 Teletext

5.3.1 Description and specifications

■ What is "Teletext"?

Teletext is the name of a system used to send still picture program data of text and graphics after multiplexing it in the vertical sync blanking interval of the TV signals. Programs broadcast in Teletext include subtitled broadcasts, news broadcasts, weather forecasts and stock market information. Teletext has achieved a high penetration rate in various countries in Europe and Southeast Asia where the 625/50i system is used.

With Teletext, a total of 40 characters × 25 lines can be contained on a page (per screen), and between 100 and 899 pages of information can be displayed.

■ Teletext specifications

Teletext supports the following TV signals.


Teletext is superimposed onto the composite signals and Y/C signals.

• PAL (but not PAL-60, PAL-N and PAL-Nc)


The vertical sync blanking interval (VBI) and Teletext waveforms are shown below.

The Teletext data can be output in lines 8 to 22 (first field) and lines 321 to 335 (second filed) in the vertical sync blanking interval of the PAL signals.

A total of 45 bytes consisting of the Clock Run-In, Framing Code and data bytes (42 bytes) are superimposed in one line.

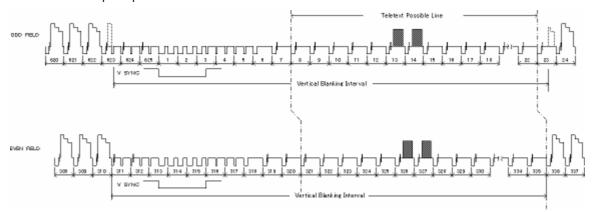


VBI waveforms

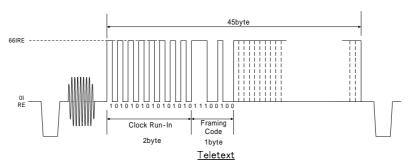

Teletext waveforms

5.3.2 Setting procedure

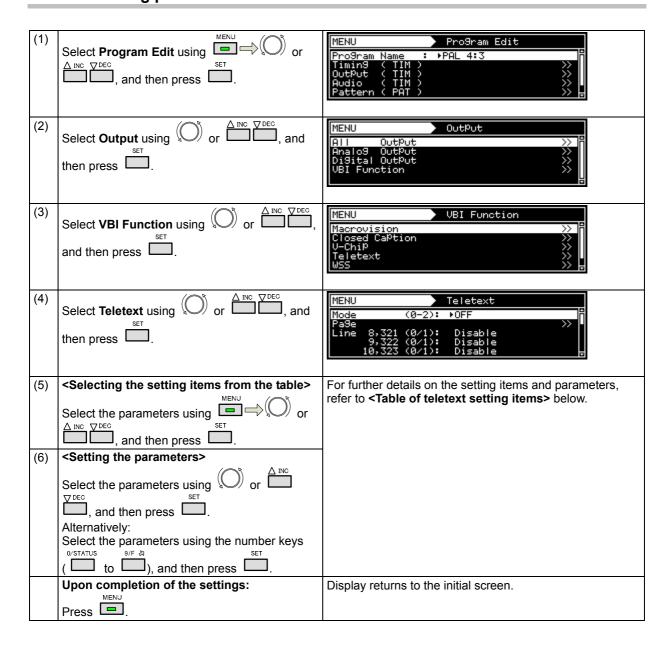

<Table of teletext setting items>

(1)	Mode (0-2)	The Teletex	t operation n	ode is selected here.		
		0	Off	Teletext OFF.		
		1	Default	The default pages are output. For further details, refer to the teletext default on next pages		
		2	Page Selec	The pages selected by page in (2) below is output here.		
(2)	Page Press ☐ to display the setting menu.	NENU				
		This generator enables up to 20 pages of teletext screens to be registered. Numbers for the internal data are set on each page.				
(3)	Line	I		letext data is to be output are set here. ne numbers in the first field and second field.		
		8,321	0 Disable	The data is not output in line 8 and line 321.		
			1 Enable	The data is output in line 8 and line 321.		
		9,322	Same settir	g as above.		
		10,323	Same settir	g as above.		
		•				
		22,335	22,335 Same setting as above.			

■ Teletext default pages (page 1 of 2)

Page No.	Description	Screen	Page No.	Description	Screen
100	Index Page	CONTENTS INFORMATION THE PAGE 100 GLOCKGLACKER 105 THE PAGE 100 GLOCKGLACKER 105 THEY PAGE 100 THEY PAGE 100 CHARACTER PAGE 200 - 200 COLORGE - 200 - 200 COLORGE - 200 THEY PAGE 100 T	101	Test Page	ASTRODESIGN FELETENT SIDNAL DEPENDENT TOLER SUPPLY TO THE STATE OF T
102	Newsflash		103	Subtitle	103 200 103
200	Character (English)	CHARLES AND CONTRACT OF THE CO	201	Character (German)	COLUMN TO SERVICE TO S
202	Character (Swedish /Finnish /Hungarian)	Sould any Family Municipal Community Sould any Family Municipal Commu	203	Character (Italian)	CHARLER CHARLES CHA
204	Character (French)	TO PACE 104 FOREIGN AND CONTRACTOR OF THE STATE OF THE	205	Character (Portuguese /Spanish)	PROPERTY OF THE PROPERTY OF TH

■ Teletext default pages (page 2 of 2)

Page No.	Description	Screen	Page No.	Description	Screen
206	Character (Czech /Slovak)	CHIPPECTER CREATIONNO SACCOTRATIVE SACCOTRATIVE SACCOTRATIVE AND SACCOTRATIVE	301	Colours	SOI PAGE : 388 WHITE YELLOW CYAM GREEN PROCESSTA
302	White Flat	393 PASE 302	505	Clock Cracker	SOS PAGE I EGG
515	Multi Page	SUBCODE:0 SUBCODE:3 4 sub-pages	555	Test Pattern1	\$55 PMOF 1 DES 1216EA7890122454 FR012 2654789012 0 R0M27 121656789012245547890122454789012 90 R0M27 121654789012245547890123454789012 90 R0M07 1216547890122555478901234547890124547890 90 R0M07 1225547890122555478901234547890123454789012245789012245789012245478900122454789000000000000000000000000000000000000
560	Test Pattern2	Sed Price See	-	Other pages	Screen which appears for page 700

5.4 WSS

5.4.1 Description and specifications

■ What is WSS (Wide Screen Signaling)?

"WSS (Wide Screen Signaling)" is a system for multiplexing the aspect ratio information of the images in the vertical sync blanking interval, and sending it.


■ WSS specifications

WSS supports the following TV signals.

WSS is superimposed onto the composite signals and Y/C signals.

- PAL, PAL-N, PAL-Nc
- SECAM

The aspect ratio information of WSS is superimposed on line 23 of the first field. The WSS waveform consists of Run-In, Start Code and the 14-bit data. This waveform and the bit allocation are shown below.

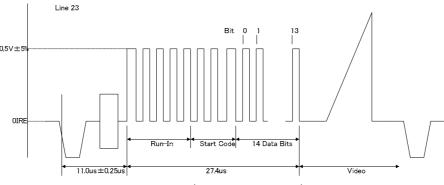

WSS(Widscreen Signaling)

· Bit3-0: Aspect

Bit			Aspect Ratio	Full format or Letterbox	Position
0 1	12	3			
0.0	0 0	1	4:3	Full format	Not applicable
1 0	0 0	0	14:9	Letterbox	Center
0 1	0 1	0	14:9	Letterbox	Тор
1 1	0 1	1	16:9	Letterbox	Center
0.0	1 (0	16:9	Letterbox	Тор
1 0	1 (1	>16:9	Letterbox	Center
0 1	l 1	1	14:9	Full format	Center
1 1	l 1	0	16:9	Full format	Not applicable

Bit 3 is the parity bit.

• Bit4-13: Other service information (not supported by the VG-870B/871B)

5.4.2 Setting procedure

(1)	Select Program Edit using or or \triangle inc. \triangle and then press.	MENU
(2)	Select Output using or or incompleted, and then press.	MENU OutPut >> P Analog OutPut >> Digital OutPut
(3)	Select VBI Function using or or or or and then press .	MENU VBI Function Macrovision Closed Caption V-Chip Teletext WSS
(4)	Select WSS using or or or and then press.	MENU WSS OFF/ON (0/1): ▶OFF AsPect Ratio(0-7): Full Format 4:3
(5)	Selecting the setting items from the table> Select the parameters using SET or and then press	For further details on the setting items and parameters, refer to <table items="" of="" setting="" wss=""> below.</table>
(6)	Select the parameters using or	
	Upon completion of the settings: Press .	Display returns to the initial screen.

<Table of WSS setting items>

(1)	OFF/ON (0/1)	WI	Whether the WSS information is to be output is set here.		
		0	OFF	The WSS information is not output.	
		1	ON	The WSS information is output.	
(2)	Aspect Ratio (0-7)	Th	e aspect ratio is set here		
		0	The aspect ratio is set to	Full Format 4:3.	
		1	The aspect ratio is set to LB 14:9 center.		
		2	The aspect ratio is set to LB 14:9 top .		
		3	The aspect ratio is set to LB 16:9 center.		
		4	The aspect ratio is set to LB 16:9 top .		
		5	The aspect ratio is set to LB >16:9 center.		
		6	The aspect ratio is set to Full Format 14:9.		
		7	The aspect ratio is set to	Full Format 16:9.	

5.5 CGMS -A/ID-1

5.5.1 Description and specifications

■ What is CGMS-A (Copy Generation Management System)?


CGMS-A is a system of multiplexing the copy control information in the vertical sync blanking intervals, and sending it.

■ What is ID-1?

ID-1 is a system of multiplexing the aspect ratio information in the vertical sync blanking intervals, and sending it.

- NTSC, NTSC-M, NTSC-443
- PAL-60, PAL-M

CGMS-A and ID-1 are superimposed onto line 20 (first field) and line 283 (second field). The CGMS-A and ID-1 waveform consists of the reference bit and 20-bit data. This waveform and the bit allocation are shown below.

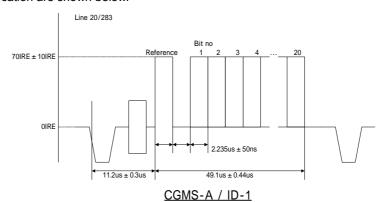

Bit1-0: Aspect (ID1)

Bit		Applications		
1	2	Aspect ratio	Picture display format	
0	0	4:3	Normal	
1	0	16:9	Normal	
0	1	4:3 Letter Box		
1	1	Not Defined		

• Bit6-2: Fixed at "0000"

• Bit8-7: CGMS-A

В	it	Application
7	8	Αρριικατίστι
0	0	Copy is permitted without restriction
1	0	Condition not to be used
0	1	One generation of copies may be made
1	1	No copying is permitted

- Bit14-9: Other service information (not supported by the VG-870B/871B)
- Bit20-15: CRC

5.5.2 Setting procedure

(1)	MENU (R	MEIIII E C C C C C C C C C C C C C C C C
(1)	Select Program Edit using	MENU Pro9ram Edit Pro9ram Name : ▶NTSC-M
	△ INC ♥ DEC SET	Pro9ram Name : ►NTSC-M Timin9 (TIM) >>
	and then press.	OutPut (TIM) >> Audio (TIM) >>
	,	Pattern (PAT)
(2)	Select Output using O or and	MENU Output
` '	Select Output using O or , and	AII Output >> In
	SET	Analog OutPut >>
	then press .	Digital OutPut >> VBI Function >>
(3)	Select VBI Function using or or or or	MENU VBI Function
	Select VBI Function using or ,	Macrovision >>
	and then press .	Closed Caption >> U-Chip >>
	and then press —.	Teletext >> U
(4)	\bigwedge \bigwedge INC \bigvee DEC	MENU CGMS-A/ID-1
(' '	Select CGMS-A/ID-1 using or ,	OFF/ON Field1(0/1): ▶OFF
	SET	Field2(0/1): OFF AsPect (0-3): 4:3 Normal
	and then press —.	CGMS-A (0-3): CoP9in9 Permitted
		H H
(5)	<selecting from="" items="" setting="" table="" the=""></selecting>	For further details on the setting items and parameters,
	Coloot the parameters using MENU	refer to <table and="" cgms-a="" id-1="" items="" of="" setting="" the=""> below.</table>
	Select the parameters using □□□□□ or Δ INC ∇DEC	below.
	and then press.	
(6)	<setting parameters="" the=""></setting>	
()		
	Select the parameters using \bigcirc or $\stackrel{\triangle \text{INC}}{\sqsubseteq}$	
	, and then press .	
	Alternatively:	
	Select the parameters using the number keys	
	(to), and then press .	
	Upon completion of the settings:	Display returns to the initial screen.
	MENU	Tiepisy istains to the minute solder.
	Press .	

<Table of the CGMS-A and ID-1 setting items>

(1)	OFF/ON Field1 (0/1)	WI	Whether to output the data to line 20 of the first field is set here.			
		0	OFF	The data is not output.		
		1	ON	The data is output.		
(2)	OFF/ON Field2 (0/1)	WI	Whether to output the data to line 283 of the second field is set			
		0	OFF	The data is not output.		
		1	ON	The data is output.		
(3) Aspect		Th	e aspect ratio setting is s	elected here.		
		0	4:3 Normal	The aspect ratio is set to 4:3.		
		1	16:9 Normal	The aspect ratio is set to 16:9.		
		2	4:3 Letter Box	The aspect ratio is set to 4:3 letter box.		
		3	Not Defined	The aspect ratio is left undefined.		
(4)	CGMS-A	Со	py protection is set here.			
		0	Copying Permitted	Copying is permitted.		
		1	Not Used Condition	The CGMS-A is left undefined.		
		2	Copy Once	Copy-once is set.		
		3	No Copying Permitted	Copying is not permitted.		

^{*} The same data is superimposed onto line 20 and line 283.



PATTERN SETTINGS

6.1 Color bar patterns

6.1.1 Types of color bar patterns

When color bars have been selected using the pattern key, for instance, color bar patterns can be selected from among the types listed below.

For further details on pattern selection, refer to "2.1.3 Selecting the pattern data."

0	сиѕтом	Customized pattern	
1	100/100-H	100%/100% color bars	
2	100/75-H	100%/75% color bars	
3	75/75-H	75%/75% color bars	
4	SMPTE	SMPTE color bars	75%/75% color bars
5	RGBW-V	Horizontal color bars	
6	xvYCC 4%	xvYCC 4% color bars	
7	xvYCC 8%	xvYCC 8% color bars	
8	xvYCC 12%	xvYCC 12% color bars	SMPTE color bars



The xvYCC color bars are turned off in the SCART output (RGB) of the TV encoder unit. xvYCC Patterns from other output than HDMI is not displayed correctly.

6.1.2 Color bar pattern customizing

Described below is the procedure for selecting the color bar pattern types and for performing the settings when **CUSTOM** has been selected as the color bar pattern.

(If **CUSTOM** is selected, the color bar patterns can be displayed with any width and color.)

(1)	Select Program Edit using or \triangle inc \bigcirc or \triangle inc \bigcirc and then press .	ProSram Edit
(2)	Select Pattern (PAT) using or or or and then press .	MENU Pattern Pattern/RGB/INU Select Color Bar Gray Scale Ramp Sweep Sweep
(3)	Select Pattern/RGB/INV select using or or and then press.	MENU Pattern/RGB/INV Select Color Bar Gray Scale RamP Sweep Monoscope
(4)	Select Color Bar using or or or or then press.	MENU Pattern/RGB/INV Select ☑ Color Bar ☐ Gray Scale ☐ RamP ☐ Sweep ☐ Monoscope
(5)	Press .	MENU Pattern Pattern/RGB/INV Select Color Bar Gray Scale Ramp Sweep >>> >> >> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >> >>> >>> >>> >>> >> >>> >> >>> >> >>> >> >>> >> >>> >> >> >> >> >> >> >> >> >> >> >> >> >> >> >> >>
(6)	Select Color Bar using or or or and then press.	MENU Color Bar Type (0-8): ▶CUSTOM >>
(7)	Select Type using or	For further details on the patterns, refer to "6.1.1 Types of color bar patterns."
	Select CUSTOM using or or □□□□, and then press □.	MENU CUSTOM Format (0-3): ►H direction RePeat : 16 InPut Mode (0/1): % Width [%]: H= 6.3 V= 6.3 Color/Level >> □

(8)	When CUSTOM has been selected as the Type setting	For further details on the settings, refer to Table of customized color bar pattern setting items > below.
	<selecting items="" the=""></selecting>	
	Select the items using \bigcirc or $\stackrel{\triangle \text{INC}}{\longrightarrow}$ $\stackrel{\nabla \text{DEC}}{\longrightarrow}$, and	
	then press .	
	<pre><inputting parameters="" the=""></inputting></pre>	
	Select the parameters using or or	
	\Box , and then press \Box .	
	Alternatively:	
	Select the parameters using the number keys	
	(to to), and then press .	

<Table of customized color bar pattern setting items>

(1)	Format (0-3)	The dra	The drawing direction of the color bars is set here.			
		0 H C	Direction	Но	rizontal dir	ection
		1 V D	irection	Ve	rtical direct	tion
		2 H C	irection&div.V	Но	rizontal dir	rection (loopback by Repeat)
		3 V D	irection&div.H	Ve	rtical direct	tion (loopback by Repeat)
(2)	Repeat		One or more of the 1 to 16 data set by Color/Level are set here. The value set here becomes the number of colors which are displayed. Range: 1 to 16			
(3)	Input Mode (0/1)		ethod of specifying th	ne d	splay size	per color is set here.
		0 %			e size is se een.	et as a percentage of the entire
		1 dot		Th	e size is se	et in 1-dot increments.
(4)	Width [%]	The dis	splay size per color is	se	t here.	
	Width [dot]	When a percentage is used for Input Mode		Set any width from 0.0% to 100.0%.		
			When dots are used for Input Mode		Set the width in 1-dot increments.	
(5)	Color/Level	The dis	The display color and level are set here.			
CUSTOM Color/Level						
		Numbe	Number			om 1 to the Repeat setting are used
				for the display.		
		Color		Th	e display c	olors are selected here.
				0		Black
				1	R	Red
				2	_G_	Green
				3	RG_	Yellow
				4	B	Blue
				5	R_B	Magenta
				6	_ G B	Cyan
		_		7	RGB	White
		Level				a percentage of the peak brightness etting range: 0.0 to 100.0%

6.2 Gray scale patterns

6.2.1 Types of gray scale patterns

When gray scale has been selected using the pattern key, for instance, gray scale patterns can be selected from among the types listed below.

For further details on pattern selection, refer to "2.1.3 Selecting the pattern data."

0	сиѕтом	Customized pattern	
1	8Step-H	8 steps (horizontal)	_
2	16Step-H	16 steps (horizontal)	_
3	32Step-H	32 steps (horizontal)	16Step-H
4	8Step-V	8 steps (vertical)	
5	16Step-V	16 steps (vertical)	
6	32Step-V	32 steps (vertical)	16Step-V

6.2.2 Gray scale pattern customizing

Described below is the procedure for selecting the types of gray scale patterns and for performing the settings when **CUSTOM** has been selected as the gray scale pattern.

(If CUSTOM is selected, the color bar patterns can be displayed with any width and level.)

(1)	Select Program Edit using or or and then press or .	Pro9ram Edit Pro9ram Name : ▶EIA1920x1080P@60
(2)	Select Pattern (PAT) using or or or and then press.	MENU Pattern Pattern/RGB/INV Select Color Bar Gray Scale Ramp Sweep Sweep
(3)	Select Pattern/RGB/INV select using or or and then press.	MENU Pattern/RGB/INV Select Color Bar Gray Scale RamP Sweep Monoscope
(4)	Select Gray Scale using or or or or and then press.	MENU Pattern/RGB/INV Select Color Bar Gray Scale RamP Sweep Monoscope
(5)	Press .	MENU Pattern Pattern/RGB/INV Select Color Bar Gray Scale Ramp Sweep >>> >> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >> >> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >> >>> >>> >>> >>> >>> >>> >> >>> >> >> >>> >> >>> >>> >>> >>> >>> >>> >>> >>> >>> >> >>> >>> >>> >>> >> >> >> >> >> >> >> >> >>
(6)	Select Gray Scaler using or $\stackrel{\triangle \text{INC}}{\longrightarrow}$ or $\stackrel{\triangle \text{INC}}{\longrightarrow}$, and then press $\stackrel{\text{SET}}{\longrightarrow}$.	MENU Gray Scale Type (0-6): ▶CUSTOM CUSTOM >>
(7)	Select Type using or	For further details on the patterns, refer to "6.2.1 Types of gray scale patterns."

(8)	When CUSTOM has been selected as the Type setting	MENU CUSTOM Format (0-3): ▶H direction		
	<detailed customized="" of="" patterns="" settings=""> △ INC ▼ DEC</detailed>	RePeat : 16 InPut Mode (0/1):		
	Select CUSTOM using \bigcirc or $\stackrel{\triangle \text{ INC}}{\longrightarrow} \stackrel{\nabla \text{DEC}}{\longrightarrow}$, and	Level >> #		
	then press .			
	<selecting items="" the=""></selecting>	For further details on the settings, refer to <table of<="" td=""></table>		
	Select the items using \bigcirc or $\stackrel{\triangle \text{ INC}}{\longrightarrow}$ $\stackrel{\nabla \text{DEC}}{\longrightarrow}$, and	customized gray scale pattern setting items> below.		
	then press .			
	<pre><inputting parameters="" the=""></inputting></pre>			
	Select the parameters using or or or			
	$\stackrel{\nabla}{\bigsqcup}$, and then press $\stackrel{\text{SET}}{\bigsqcup}$.			
	Alternatively:			
	Select the parameters using the number keys			
	(to), and then press .			

<Table of customized gray scale pattern setting items>


(1)	Format (0-3)	The	The drawing direction of the gray scale is set here.		
	, ,	0	H Direction		tal direction
		1	V Direction	Vertical	direction
		2	H Direction&div.V	Horizon	tal direction (loopback by Repeat)
		3	V Direction&div.H		direction (loopback by Repeat)
(2)	Repeat	On	e or more of the 1 to 16		by Level are set here. The value set here
. ,		bed	comes the number of ste	ps which	are displayed. Range: 1 to 16
(3)	Input Mode (0/1)	The		e display	size per step is set here.
		0	%	The size screen.	e is set as a percentage of the entire
		1	dot	The size	e is set in 1-dot increments.
(4)	Width[%]	The	e display size per step is	set here	
	Width[dot]		When a percentage is used for Input Mode		size from 0.0% to 100.0%.
			When dots are used for Input Mode		size in 1-dot increments.
(5)	Level	The	e display level is set here	e.	
			Bit Leng	Bit Length	
MENU			ENU CUSTOM Level : (8bit)		
		1: 8			
			Tullibel	The ete	no from 1 to the Depart potting are used
		Nu	mber	for the	ps from 1 to the Repeat setting are used display.
		Level			el is set here. ting range differs depending on the color
				8 BIT	0 to 255
				9 BIT	0 to 511
				10 BIT	0 to 1023
				11 BIT	0 to 2047
				12 BIT	0 to 4095
				13 BIT	0 to 8191
				14 BIT	0 to 16383
				15 BIT	0 to 32767
				16 BIT	0 to 65535

6.3 Ramp patterns

6.3.1 Types of ramp patterns

When ramp has been selected using the pattern key, for instance, ramp patterns can be selected from among the types listed below.

For further details on pattern selection, refer to "2.1.3 Selecting the pattern data."

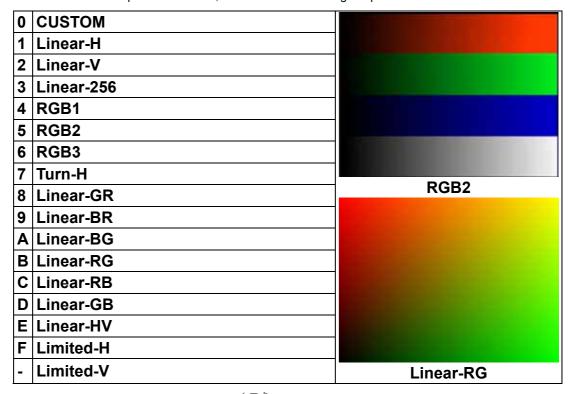

^{*1} Limited-V is selectable only by \bigcirc or $\stackrel{\triangle}{\sqsubseteq}$.

^{*2} The luminance level of Limited-H/V is 16-232 and color-difference level is 16-240.

6.3.2 Ramp pattern type settings and customizing

Described below is the procedure for selecting the types of ramp patterns and for performing the settings when **CUSTOM** has been selected as the ramp pattern type.

(If **CUSTOM** is selected, the ramp patterns can be displayed with any level and steps.)

(1)	Select Program Edit using or or and then press or .	MENU Pro9ram Edit Pro9ram Name : ►EIA1920x1080Pa60 Timin9 (TIM) >> OutPut (TIM) >> Audio (TIM) >> Pattern (PAT) >> T
(2)	Select Pattern (PAT) using or $\stackrel{\triangle \text{INC}}{\longrightarrow}$ or $\stackrel{\triangle \text{INC}}{\longrightarrow}$, and then press $\stackrel{\text{SET}}{\longrightarrow}$.	MENU Pattern Pattern/RGB/INV Select Color Bar Gray Scale Ramp Sweep Sweep
(3)	Select Pattern/RGB/INV select using or or and then press.	MENU Pattern/RGB/INV Select Color Bar
(4)	Select Ramp using or $\stackrel{\Delta \text{INC}}{\longleftarrow}$ or $\stackrel{\nabla \text{DEC}}{\longleftarrow}$, and then press $\stackrel{\text{SET}}{\longleftarrow}$.	MENU Pattern/RGB/INV Select Color Bar Gray Scale RamP Sweep Monoscope
(5)	Press .	MENU Pattern Pattern/RGB/INV Select Color Bar Gray Scale Ramp Sweep
(6)	Select Ramp using or or or then press.	MENU RamP TYPe (0-E): ▶Linear-HV CUSTOM >>>
(7)	Select Type using or or or and then press , and then press . Alternatively: Select the parameters using the number keys of the parameters using the number keys (to), and then press .	For further details on the patterns, refer to "6.3.1 Types of ramp patterns."

(8)	When CUSTOM has been selected as the Type setting	MENU Direction(0/1):	CUSTOM ▶H	: 8bit	
	Select CUSTOM using Or or □ □ , and	H-Line : Level Line1 : Line2 :		255 16 255 32 s End) (Step)	
	then press .	For further details pattern setting it		gs, refer to <tabl< b=""></tabl<>	e of ramp
	Select the items using or $\stackrel{\triangle}{\longrightarrow}$ or $\stackrel{\nabla}{\longrightarrow}$ and				
	then press .				
	Inputting the parameters> Select the parameters using or □				
	¬ DEC ¬ DEC ¬ SET ¬ SET				
	Alternatively:				
	(\Box) to $\Box)$, and then press $\Box $.				

<Table of ramp pattern setting items>

(1)	Direction (0/1)	The resolution is s	et here.	
		0 H	Horizontal ramp	
		1 V	Vertical ramp	
(2)	H-Line	Up to four ramp patterns with different levels and steps can be displayed on one screen. Range: 1 to 4 types. These types are used in sequence from line 1.		
(3)	Line1 to Line4	The start level, end	l level and step are set here.	
			Bit Length	
	255 16 2 255 32 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2			
		(Start)	The start level is set here.	
		(End)	The end level is set here.	
		(Step)	The number of display steps from the start level to end level is set here. Setting range: 1 ≤ setting ≤ (End) - (Start) + 1	
			The setting range for the above levels differs depending on the color depth .	
			8 BIT 0 to 255	
			9 BIT 0 to 511	
			10 BIT 0 to 1023	
			11 BIT 0 to 2047	
			12 BIT 0 to 4095	
			13 BIT 0 to 8191	
			14 BIT 0 to 16383	
			15 BIT 0 to 32767	
			16 BIT 0 to 65535	

- Concerning H-Line
- This item takes effect only when "0" has been selected as the Direction setting.

Concerning Direction
When "1" has been selected as the Direction setting, only "1" takes effect as the H-Line setting. (Splitting in the vertical direction is not possible.)

6.4 Sweep patterns

6.4.1 Types of sweep patterns

When sweep has been selected using the pattern key, for instance, sweep patterns can be selected from among the types listed below.

0	Multi-Burst 100	Multi-burst	
1	Multi-Burst 50	Multi-burst	
2	Sweep	Sweep	Multi-burst

6.4.2 Sweep pattern selection

The types of sweep patterns can be set using the procedure below.


(1)	Select Program Edit using SET or and then press .	MENU Program Edit Program Name : FEIA1920x1080Pa60 Timin9 (TIM) OutPut (TIM) Audio (TIM) Pattern (PAT)
(2)	Select Pattern (PAT) using or or or and then press .	MENU Pattern Pattern/RGB/INV Select Color Bar Gray Scale Ramp Sweep
(3)	Select Pattern/RGB/INV select using or or and then press.	MENU Pattern/RGB/INV Select Color Bar
(4)	Select Sweep using or $\stackrel{\triangle \text{INC}}{\longrightarrow}$ or $\stackrel{\nabla \text{DEC}}{\longrightarrow}$, and then press $\stackrel{\text{SET}}{\longrightarrow}$.	MENU Pattern/RGB/INV Select Color Bar Gray Scale Ramp Sweep Monoscope
(5)	Press .	MENU Pattern Pattern/RGB/INV Select Color Bar Gray Scale Ramp Sweep Pattern Pattern Signature Signature Pattern Signature Pattern Signature Pattern Signature Signature Pattern Signature Signature Pattern Signature Pattern Signature Pattern Signature Sig
(6)	Select Sweep using \bigcirc or $\stackrel{\triangle \text{INC}}{\square}$ or $\stackrel{\nabla \text{DEC}}{\square}$, and then press $\stackrel{\text{SET}}{\square}$.	MENU SweeP Type (0-3): ►Multi-Burst 100
(7)	Selecting the items> Select Type using or □□□, and then press □□.	For further details on the patterns, refer to "6.4.1 Types of sweep patterns."
	Select the parameters using or	

6.5 Monoscope patterns

6.5.1 Types of monoscope patterns

When monoscope has been selected using the pattern key, for instance, monoscope patterns can be selected from among the types listed below.


For further details on pattern selection, refer to "2.1.3 Selecting the pattern data."

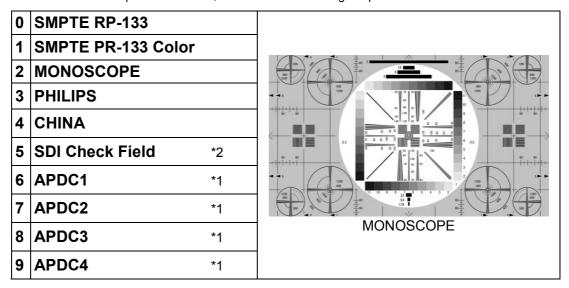

^{*1} APDC1 to APDC4 are patterns provided by the Advanced PDP Development Center Corporation (APDC), and are used to evaluate movie resolution. These patterns are an option. For further details, contact an Astrodesign sales representative or your dealer.

6.5.2 Monoscope pattern selection

The types of monoscope patterns can be set using the procedure below.

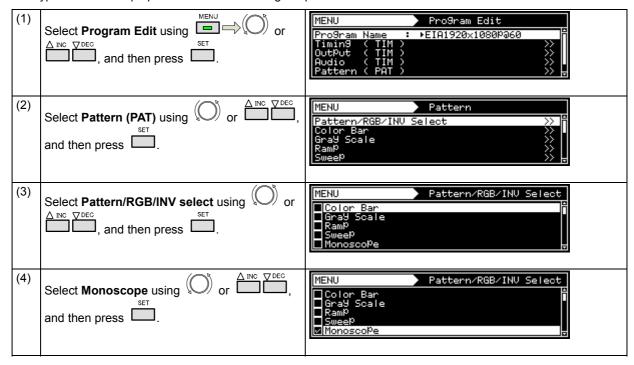

^{*2} This is the check pattern which is used only for SDI outputs. It is output only from SDI outputs.


(5)	Press ESC.	MENU Pattern Pattern/RGB/INU Select Color Bar Gray Scale Ramp Sweep >>> >> >> >> >>> >>> >>> >>> >>> >>> >>> >> >>> >>> >> >> >>> >> >>> >> >>> >> >>
(6)	Select Monoscope using \bigcirc or $\stackrel{\triangle \text{INC}}{\square}$ or and then press $\stackrel{\text{SET}}{\square}$.	MENU Monoscope Type (0-9): ▶SMPTE RP-133
(7)	Select Type using or or and then press ., and then press . Select the parameters using or or or . Select the parameters using or . Alternatively: Select the parameters using the number keys	For further details on the patterns, refer to "6.5.1 Types of monoscope patterns."
	$(\stackrel{\text{O/STATUS}}{\square} \text{ to } \stackrel{\text{9/F}}{\square})$, and then press $\stackrel{\text{SET}}{\square}$.	

6.6 Raster patterns

6.6.1 Types of raster patterns


When raster has been selected using the pattern key, for instance, raster patterns can be selected from among the types listed below.

For further details on pattern selection, refer to "2.1.3 Selecting the pattern data."

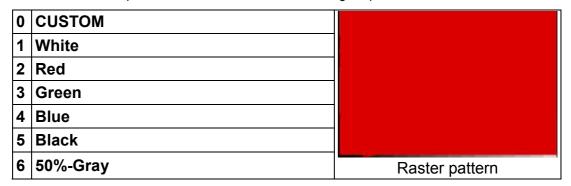

6.6.2 Raster pattern type settings and customizing

Described below is the procedure for selecting the types of raster patterns and for performing the settings when CUSTOM has been selected as the raster pattern type. (The rasters can be displayed with any level.)

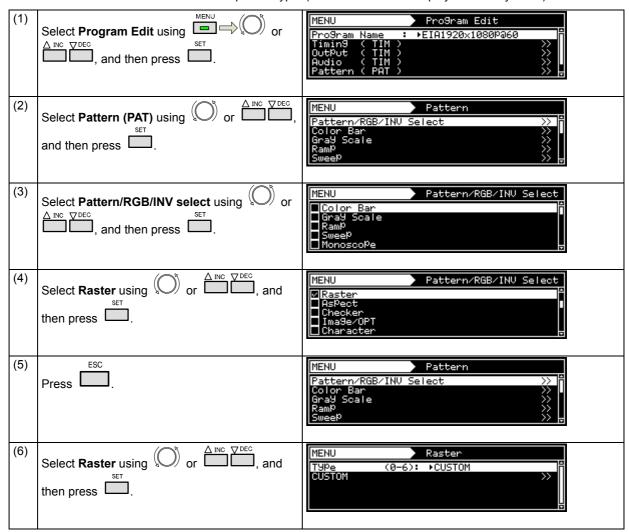

(7)	<setting the="" type=""></setting>	For further details on the types of patterns, refer to "6.		
	Select Type using or or , and then	Types of r	aster pat	tterns."
	press .			
	<setting parameters="" the=""></setting>			
	Select the parameters using or or or			
	\Box , and then press \Box .			
	Alternatively:			
	Select the parameters using the number keys 9/F & SET			
	(to), and then press .			
(8)	When CUSTOM has been selected as the Type			Bit Length
	setting	MENU		
	<detailed customized="" of="" patterns="" settings=""></detailed>			
	Select CUSTOM using \bigcirc or $\stackrel{\triangle \text{INC}}{\longrightarrow}$ $\stackrel{\nabla \text{DEC}}{\longrightarrow}$, and			
	then press .			
	Select the items using \bigcirc or $\stackrel{\triangle \text{INC}}{\longrightarrow}$, and	R,G,B	The setting range for the above levels differs depending on the color depth .	
	SET		8 BIT	0 to 255
	then press .		9 BIT	0 to 511
	Alternatively		10 BIT	0 to 1023
	Select the parameters using the number keys		11 BIT	0 to 2047
	0/STATUS 9/F 為 SET		12 BIT	0 to 4095
	(to), and then press .		13 BIT	0 to 8191
			14 BIT	0 to 16383
			15 BIT	0 to 32767
			16 BIT	0 to 65535

6.7 Aspect ratio patterns

6.7.1 Types of aspect ratio patterns

When aspect ratio has been selected using the pattern key, for instance, aspect ratio patterns can be selected from among the types listed below.

0	Over Scan		,#" ,#"
	A	FD	
	0	As the coded frame	
	1	4:3 (center)	inin him
	2	16:9 (center)	
	3	14:9 (center)	
	4	box 16:9 (top)	'±- '±-
1	5	box 14:9 (top)	Over Scan
1	6	box 13:7 (center)	
	7	box 2:1 (center)	
	8	box 11:5 (center)	
	9	box 12:5 (center)	\mathcal{A}
	Α	4:3 (14:9 center)	
	В	16:9 (14:9 center)	
	С	16:9 (4:3 center)	AFD pattern

6.7.2 Aspect ratio pattern type settings and customizing

Described below is the procedure for selecting the types of aspect ratio patterns and for performing the settings when **CUSTOM** has been selected as the aspect ratio pattern type.

(If CUSTOM is selected, the aspect ratio patterns can be displayed with any level.)

(1)	Select Program Edit using or or set and then press .	MENU
(2)	Select Pattern (PAT) using or $\stackrel{\triangle \text{ INC}}{\longleftarrow}$ or $\stackrel{\nabla \text{DEC}}{\longleftarrow}$, and then press $\stackrel{\text{SET}}{\longleftarrow}$.	MENU Pattern Pattern/RGB/INV Select Color Bar Gray Scale Ramp Sweep
(3)	Select Pattern/RGB/INV select using or or and then press.	MENU Pattern/RGB/INV Select Color Bar
(4)	Select Aspect using or or or and then press.	MENU Pattern/RGB/INV Select Raster Raspect Checker Image/OPT Character
(5)	Press .	MENU Pattern Pattern/RGB/INV Select Color Bar Gray Scale Ramp Sweep
(6)	Select Aspect using or $\stackrel{\triangle \text{INC}}{\longleftarrow}$, and then press $\stackrel{\text{SET}}{\longleftarrow}$.	MENU Aspect Type (0/1): ▶Over Scan AFD Solution
(7)	Select Type using or or or and then press . Select Type using or	For further details on the types of patterns, refer to "6.7.1 Types of aspect ratio patterns."

(8)	When AFD has been selected as the Type setting	MENU Aspect (0,	AF0 ✓1): ▶4		: 8bit
	Select AFD using of AFD patterns> Select AFD using or □□□, and then	Type (0- ColorCircle R,(Back R,(-C): a G,B: 25 G,B: 12 G,B: 12	5 , 255 , 8 , 128 ,	frame 255 128 128
	press ., and then	For further details pattern setting it			to <table afd<="" of="" td=""></table>
	Select the items using \bigcirc or $\stackrel{\triangle \text{INC}}{\longrightarrow}$ $\stackrel{\nabla \text{DEC}}{\longrightarrow}$, and				
	then press .				
	<pre><inputting parameters="" the=""></inputting></pre>				
	Select the parameters using or or or				
	, and then press.				
	Alternatively:				
	Select the parameters using the number keys				
	(to), and then press .				

<Table of AFD pattern setting items>

(1)	Aspect (0/1)	The aspect ratio of	The aspect ratio of the screen is set here.		
		0 4:3	The images are displayed on the screen with a 4:3 aspect ratio.		
		1 16:9	The images are displayed on the screen with a 16:9 aspect ratio.		
(2)	Туре	For details on the patterns."	types of patterns, refer to "6.7.1 Types of aspect ratio		
(3)	Color	MENU RsPect (0/1): Type (0-C): ColorCircle R.6.B: Back R.6.B: R.6.B: Part Circle	as the coded frame 255 , 255 , 255 , 255 , 128 ,		
		Circle	Display the circle level. The R, G and B levels are displayed in sequence from the left. The setting range for the above level differs depending on the color depth. 8 BIT 0 to 255 9 BIT 0 to 511 10 BIT 0 to 1023 11 BIT 0 to 2047 12 BIT 0 to 4095 13 BIT 0 to 8191 14 BIT 0 to 16383 15 BIT 0 to 32767 16 BIT 0 to 65535 Set the background level. (Details are the same as for Color Circle.)		
		Bar	Set the bar level. (Details are the same as for Color Circle .)		

6.8 Checkerboard patterns

6.8.1 Types of checkerboard patterns

When checkerboard has been selected using the pattern keys or other keys, any of the following types of patterns can be selected.

0	DOT × DOT	Dot	
1	BLOCK × BLOCK	Block	
2	SubPixel	Sub-pixel	

6.8.2 Checkerboard pattern customizing

The types of checkerboard patterns are selected and their intervals are set using the procedure below.

(1)	Select Program Edit using or or set and then press.	MENU Program Edit Program Name : ►EIA1920x1080Pa60 Timin9 (TIM)
(2)	Select Pattern (PAT) using or or or and then press .	MENU Pattern Pattern/RGB/INV Select Color Bar Gray Scale Ramp Sweep >>
(3)	Select Pattern/RGB/INV select using or or and then press.	MENU Pattern/RGB/INV Select Color Bar
(4)	Select Checker using or or or and then press.	MENU Pattern/RGB/INV Select Raster AsPect Checker Image/OPT Character
(5)	Press .	MENU Pattern Pattern/RGB/INV Select Color Bar Gray Scale Ramp Sweep Sweep
(6)	Select Checker using or or or then press.	MENU Checker : 8bit Type (0-2): ▶BLOCK×BLOCK DOT×DOT H : 1 BLOCK×BLOCK H : 4 U : 4
(7)	Selecting the items> Select Type using or or or and then	For details on the Type settings, refer to "6.8.1 Types of checkerboard patterns."
	press .	Depending on the Type setting, the setting items differ. Refer to the <table checkerboard="" items="" of="" setting=""></table> .
	Select the parameters using or	

<Table of checkerboard setting items>

(1)	DOTxDOT H/V	<valid dot×do<="" only="" th="" when=""><th>T has been selected as the Type setting></th></valid>	T has been selected as the Type setting>	
		Set the number of horizonta	al (H) and vertical (V) pixels for one color.	
		Setting range: 1 to 8		
(2)	BLOCKxBLOCK H/V	<valid block×<="" only="" th="" when=""><th>BLOCK has been selected as the Type setting></th></valid>	BLOCK has been selected as the Type setting>	
			al (H) and vertical (V) blocks.	
		Setting range: 2 to 32		
(3)	Sub Pixel H/V	<valid <b="" only="" when="">Sub Pixel has been selected as the Type setting></valid>		
			al (H) sub pixels and number of vertical (V) pixels.	
		Setting range: 0 to 3		
		will be set regardless of	as been selected for Color Select, H=1 and V=1	
		Setting example: H=2, V=3	-	
		2 2 		
			When User Color has been	
			selected	
		3	L Hoor Color 4 is your	
			: User Color 1 is used.	
			: User Color 2 is used.	
		3		
(4)	SubPixel Offset H/V	71		
			Is at the top left in the horizontal (H) direction and	
		Pixel H and V settings sub	very top in the vertical (V) direction. (The Sub	
		Setting range: 0 to 2		
		* When RGB 0%/100% has been selected for Color Select, H=0 and V=0		
		will be set regardless of the settings.		
		Setting example: Sub Pixel	H=3, V=1, SubPixel Offset H/V = refer to figures.	
		Offset H=0 / V=0	V=2 (/H=0)	
		Л H=1 (/V=0)		
		/ H=2 (/V=0)		
(5)	Color Color (0/4)	This sets the selection and the		
(5)	Color Select (0/1)	This sets the color and leve		
		0 RGB 0%/100%	0% / 100%	
		1 User Color	The colors selected using User Color 1 and 2 are used.	

(6)	User Color 1 R, G, B	When RGB 0%/100% has	Setting	ranges by color depth
		been selected for Color	8BIT	0 - 255
		Select, set any color and	9BIT	0 - 511
		level to be indicated by "0%."	10BIT	0 - 1023
		In the case of the Sub	11BIT	0 - 2047
		as the RGB level is set. The setting range differs depending on the color	12BIT	0 - 4095
			13BIT	0 - 8191
			14BIT	0 - 16383
			15BIT	0 - 32767
			16BIT	0 - 65535
(7)	User Color 2 R, G, B	level to be indicated by "100)%."	cted for Color Select, set any color and
				e same level as the RGB level is set.
		The setting range is the san	ne as for	User Color 1.

6.9 Image/OPT

6.9.1 Types of Image/OPT

When Image/OPT has been selected using the pattern key, for instance, optional and image patterns can be selected from among the types listed below.

0	IMAGE	Image pattern	IMAGE A still image registered as the default can be used or any still image can be registered by the user and used.
1	OPT-SAMPLE	Sample option pattern	OPT-SAMPLE
2	OPT-USER	User option pattern	Option pattern registered by the user Any test pattern can be described using a programming language.
3	MOVING-IMAGE (option)	Moving image pattern	Both the factory registered moving images and the user registered moving images can be used.


6.9.2 Option and image patterns setting

The procedure for setting optional and image patterns is described below.

(1)	Select Program Edit using or or and then press.	MENU ProGram Name : Timin9 (TIM) OutPut (TIM) Audio (TIM) Pattern (PAT)	Pro9ram Edit DEIA1920×1080Pa60 DEIA1920×1080Pa60 DEIA1920×1080Pa60 DEIA1920×1080Pa60
(2)	Select Pattern (PAT) using or \bigcap_{SET} or \bigcap_{SET} , and then press \bigcap_{SET} .	MENU Pattern/RGB/INU Color Bar Gray Scale Ramp Sweep	Pattern Select
(3)	Select Pattern/RGB/INV select using or or and then press.	MENU Color Bar Gray Scale Ramp Sweep Monoscope	Pattern/RGB/INV Select
(4)	Select Image/OPT using or $\stackrel{\triangle}{\longleftarrow}$ or $\stackrel{\square}{\longleftarrow}$, and then press $\stackrel{\square}{\longleftarrow}$.	MENU Raster Aspect Checker Image/OPT Character	Pattern/RGB/INV Select
(5)	Press .	MENU Pattern/RGB/INU Color Bar Gray Scale RamP Sweep	Pattern Select
(6)	Select Image/OPT using or	MENU No. TYPe (0- 9 Marker (OPT N	Ima9e/OPT : ▶ 76 3): OPT-SAMPLE No. 76)
(7)	Selecting the items> Select the item using or \triangle or \triangle or \triangle , and then press .		
(8)	<setting no.="" the=""> Select the No. using or $\stackrel{\triangle \text{ INC}}{\longrightarrow}$ or $\stackrel{\nabla \text{ DEC}}{\longrightarrow}$, and then press $\stackrel{\text{SET}}{\longrightarrow}$.</setting>	No.	Specific numbers are allocated to the option and image patterns. The number of the pattern to be displayed is set in No. Setting range: 1 to 200
	<setting the="" type=""> Select the Type using or ☐ ☐ ☐, and then press ☐.</setting>	Туре	For further details on the patterns, refer to "6.9.1 Types of Image/OPT." When MOV-IMAGE is selected, refer to "6.9.3 Moving images settings (option)" for the detailed procedures.

6.9.3 Moving images settings (option)


The procedure for setting moving images is described below.

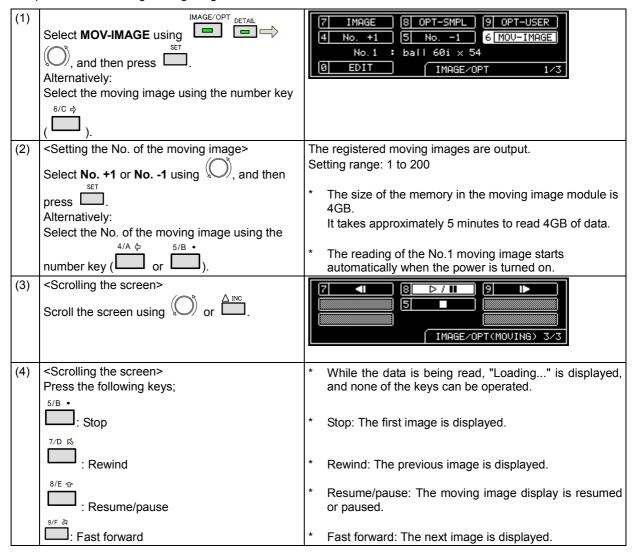

- For details on the playback times of moving images, refer to section 11.1.9.
- * The moving image data is registered using the SP-8870. For the recording format, conversion tools and other details, refer to the SP-8870 instruction manual.
- * Use the CF card provided with the moving image module for moving image data registration.

6.9.4 9-marker (OPT No.76) settings

Sample optional pattern No.76 is a pattern which displays up to nine markers and lines at the desired positions.

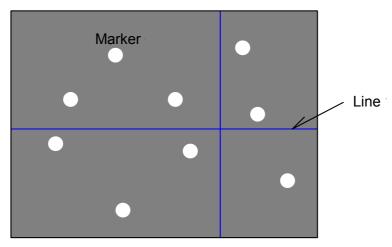

The setting procedure is given below.

For details on how to display the patterns, refer to "6.9.2 Option and image patterns setting." (Type = OPT-SAMPLE, No.76 specified)

(1)	Select Program Edit using or SET, and then press.	MENU
(2)	Select Pattern (PAT) using or or or and then press .	MENU Pattern Pattern/RGB/INU Select Color Bar Gray Scale Ramp Sweep Sweep
(3)	Select Image/OPT using or	MENU Image/OPT No. : ▶ 76 TYPe (Ø-3): OPT-SAMPLE 9 Marker (OPT No.76) >>
(4)	Select 9 Marker (OPT No.76) using or \triangle or \triangle not \triangle and then press.	MENU 9 Marker : 8bit Mark ShaPe (@/1): ▶Circle Fill (@/1): OFF(Line) Line Width : 1dot Size : 20dot Number : 1
(5)	Select the items using or image of the items using or image of the items using or image of the press or image of the parameters. Select the parameters using or image of the parameters using or image of the parameters using or image of the parameters using the number keys of the parame	For details on the parameters, refer to <table 9-marker="" items="" of="" setting="">.</table>

<Table of 9-marker setting items>

(1)	Mark Shape (0/1)	Th	The shape of the markers is specified here.		here.
		0	Circle	Circle	
		1	Square	Square	
(2)	Mark Fill (0/1)	WI	nether to fill to markers is	specified h	nere.
		0	OFF (Line)	Markers r	not filled ○□
		1	ON	Markers f	illed ●■
(3)	Mark Line Width			me lines is	Setting example: Mark Line Width = 1
			here.		Mark Size = 5
		Se	tting range: 1 to 15 [dot]		
		*	* When "ON" has been selected as the Mark Fill setting, the width will be 1 dot regardless of the setting.		
(4)	Mark Size		e size of the markers is s		
		Se	tting range: 1 to 9999 [do	otj	
					→ <
					1 dot
(5)	Mark Number	The number of the markers is set here.		l.	
		Se	Setting range: 0 to 9		
(6)	Mark Position H,V		The center coordinate of the marker position is set here.		
			Setting range: 0 to 4095 [dot]		
(7)	Mark Color R,G,B		e color of the markers is		
			The setting range differs depending on the color depth. * See below.		
(8)	Line Mode (0-3)			s and the sl	hape of the lines when they are
		0	played are set here.	No lines	
		1	V-Line		20
		2			
				nsisting of one horizontal line and one	
		٥	nv-Lille	vertical lin	
(9)	Line Width	Th	The width of the lines is set here.		
. ,		Se	tting range: 1 to 15 [dot]		
(10)	Line Position H,V		The positions of the lines are set here.		
		Setting range: 0 to 4095 [dot]			
(11)	Line Color R,G,B		e color of the lines is set		
		Th	The setting range differs depending on the color depth. * See below.		


* Color setting range.

Color Depth	Setting range
8BIT	0 - 255
9BIT	0 - 511
10BIT	0 - 1023
11BIT	0 - 2047
12BIT	0 - 4095
13BIT	0 - 8191
14BIT	0 - 16383
15BIT	0 - 32767
16BIT	0 - 65535

6.10 □ × ABC patterns

The following patterns are available as $\square \times \boxed{\mathsf{ABC}}$ patterns. Select them using the key.

All the patterns can be superimposed onto one another, and displayed.

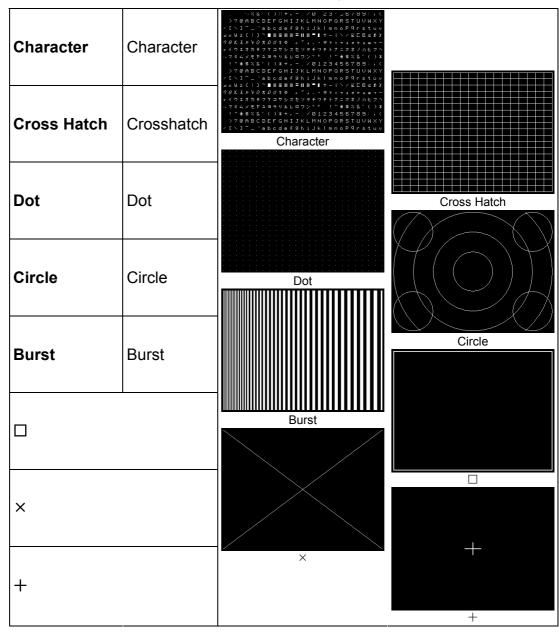

^{*} There are no items to be set in \square , \times and + patterns.

6.10.1 Color settings

The colors of the $\square \times \boxed{\mathsf{ABC}}$ patterns themselves and their background colors can be set.

(1)	Select Program Edit using or or or and then press.	MENU ProGram Name TiminG (TIM) OutPut (TIM) Audio (TIM) Pattern (PAT)	Pro9ram Edit DEIA1920×1080Pa60 DEIA1920×1080Pa60 DEIA1920×1080Pa60
(2)	Select Pattern (PAT) using or or or and then press .	MENU Pattern/RGB/INU Color Bar Gray Scale Ramp Sweep	Pattern Select
(3)	Select □ × [ABC] using or □ or □ □, and then press □.	MENU Color Character Cross Hatch Dot Circle	DXCABC1
(4)	Select Color using or or or or and then press.	Bit Length MEN. (Sbit) R ForeGround: (25) SackGround: Lev Part	0
(5)	Select the items using or ☐ or	Forground	The colors of the $\square \times \triangle$ pattern are set here (in the order of RGB from the left). The setting range differs depending on the color depth.
	Select the parameters using or □ or	Background	The background color is set here (in the order of RGB from the left). The setting range differs depending on the color depth.

Setting ranges by color depth

8 BIT	0 to 255
9 BIT	0 to 511
10 BIT	0 to 1023
11 BIT	0 to 2047
12 BIT	0 to 4095
13 BIT	0 to 8191
14 BIT	0 to 16383
15 BIT	0 to 32767
16 BIT	0 to 65535

6.10.2 Character patterns


(1)	Select Program Edit using or or set and then press .	MENU Pro9ram Edit Pro9ram Name : ►EIA1920x1080P060 Timin9 (TIM) >> OutPut (TIM) >> Audio (TIM) >> Pattern (PAT) >> Pattern (PAT) >> Pattern (PAT)
(2)	Select Pattern (PAT) using or or or and then press.	MENU Pattern Pattern/RGB/INU Select Color Bar Gray Scale Ramp Sweep
(3)	Select Pattern/RGB/INV select using or or and then press.	MENU Pattern/RGB/INV Select Color Bar
(4)	Select Character using or $\stackrel{\triangle \text{INC}}{\longleftarrow}$ or $\stackrel{\nabla \text{DEC}}{\longleftarrow}$, and then press $\stackrel{\text{SET}}{\longleftarrow}$.	MENU Pattern/RGB/INV Select Raster AsPect Checker Image/OPT Character
(5)	Press .	MENU Pattern Pattern/RGB/INV Select Color Bar Gray Scale Ramp Sweep Sweep
(6)	Select □ × [ABC] using or □ or	MENU DX[ABC] Color Character Cross Hatch Dot Circle
(7)	Select Character using or \bigcap or	MENU Character Format (0-2): ▶Character List Font (0-2): 5×7 Character Code : 48H Cell Size [dot]: H= 14 V= 18
(8)	Select the items using or	For further details, refer to Table of character setting items> below.

<Table of character setting items>

(1)	Format (0-2)	The fo	rmat is selected here	
		0 C h	naracter List	
		1 Al l	1 1-Character	
		2 C c	rner&Center	
(2)	Font (0-2)	The fo	ont size is set here.	
		0 5	< 7	
		1 7 >	< 9	
		2 16	× 16	
(3)	Character Code	The ch	naracter code is selec	ted here.
		Setting	g range: 20h to FFh	
		When	characters are select	ed directly, select ABC.
		For de	etails on the operation	procedure, refer to "2.3 Setting the names."
(4)	Cell Size [dot]	The si	ze of each character	is set here.
		Н		Set the size of the character in the horizontal direction.
		V		Set the size of the character in the vertical direction.

6.10.3 Crosshatch patterns

The crosshatch pattern settings are described below.

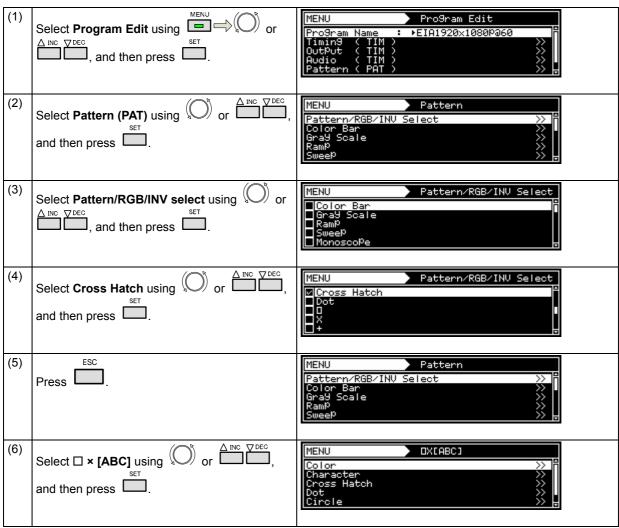

(7)	Select Cross Hatch using or or or and then press.	MENU Cross Hatch Format (0/1): ▶from Center InPut Mode (0/1): Number Of Lines Number Of Lines: H= 20 V= 20 Line Width [dot]: H= 1 V= 1
(8)	Select the items using or	For further details, refer to <table crosshatch="" items="" of="" setting=""> below.</table>
	Select the parameters using or	

<Table of crosshatch setting items>

(1)	Format (0-2)	The origin point of the pattern drawing is set here.		rn drawing is set here.
		0	From Center	The pattern is drawn using the screen center as the origin point.
		1	From Top-Left	The pattern is drawn using the top left of the screen as the origin point.
(2)	InputMode (0/1)	Th	e input mode is selected	here.
		0	Number Of Line	This sets the number of lines to be displayed on the screen.
		1	Interval (dot)	This sets the interval between the blocks.
(3)-a	When Number of Lines The number of lines		e number of lines to be d	isplayed on the screen is set here.
	has been selected as the Input Mode setting	Nu	ımber Of Lines: H =	Set the number of lines in the horizontal direction.
		Number Of Lines: V =		Set the number of lines in the vertical direction.
(3)-b	When Interval (dot) has	Th	e interval between the blo	ocks is set here.
	been selected as the Input Mode setting		erval [dot]: H =	Set the number of lines in the horizontal direction.
			erval [dot): V =	Set the number of lines in the vertical direction.
(4)	Line Width [dot]	The line width is set here.		
		Lin	ne Width [dot]: H =	Set the number of lines in the horizontal direction.
		Lir	ne Width [dot]: V =	Set the number of lines in the vertical direction.

6.10.4 Dot patterns

The dot pattern settings are described below.

(1)	Select Program Edit using or \triangle NC \bigcirc DEC, and then press.	MENU ProGram Edit ProGram Name : ►EIA1920x1080P060 Timin9 (TIM)
(2)	Select Pattern (PAT) using or or or and then press .	MENU Pattern Pattern/RGB/INU Select Color Bar Gray Scale Ramp Sweep MENU Pattern Solution Solution
(3)	Select Pattern/RGB/INV select using or or and then press.	MENU Pattern/RGB/INV Select Color Bar
(4)	Select Dot using or or or and then press.	MENU Pattern/RGB/INV Select Cross Hatch Dot X +
(5)	Press .	MENU Pattern Pattern/RGB/INU Select Color Bar Gray Scale Ramp Sweep >>> >> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >> >> >>> >>> >>> >> >> >> >> >>> >> -> -> -> >> ->
(6)	Select □ × [ABC] using or □□□□, and then press □.	MENU DX[ABC] Color Character Cross Hatch Dot Circle
(7)	Select Dot using or or or or and then press.	MENU Dot Format (0/1): ▶from Center InPut Mode (0/1): Number Of Lines Number Of Lines: H= 25 U= 25 Size [dot]: 1 ShaPe (0/1): Square
(8)	Select the items using or incomplete, and then press . Select the parameters using or incomplete, and then press . Select the parameters using or incomplete, and then press . Alternatively: Select the parameters using the number keys	For further details, refer to Table of dot setting items below.
	(to), and then press .	


<Table of dot setting items>

(1)	Format (0-2)	The origin point of the pattern drawing is set here.


		0	From Center	The pattern is drawn using the screen center as the origin point.
		1	From Top-Left	The pattern is drawn using the top left of the screen as the origin point.
(2)	InputMode (0/1)	The input mode is selected I		here.
		0	Number Of Line	This sets the number of lines to be displayed on the screen.
		1	Interval (dot)	This sets the interval between the dots.
(3)-a	When Number of Lines	Th	e number of lines to be d	isplayed on the screen is set here.
	has been selected as the Input Mode setting	Number Of Lines: H =		Set the number of lines in the horizontal direction.
	Number Of Lines:		ımber Of Lines: V =	Set the number of lines in the vertical direction.
(4)-b	When Interval (dot) has	Th	e interval between the blo	ocks is set here.
	been selected as the Input Mode setting		erval [dot]: H =	Set the number of lines in the horizontal direction.
		Int	erval [dot): V =	Set the number of lines in the vertical direction.
(5)	Size [dot]	Th	e size is set here. Setting	range: 1 to 15 [Dot]
(6)	Shape	Th	e shape is set here.	
		0	Circle	The dots are drawn in the form of circles.
		1	Square	The dots are drawn in the form of squares.

6.10.5 Circle patterns

The circle pattern settings are described below.

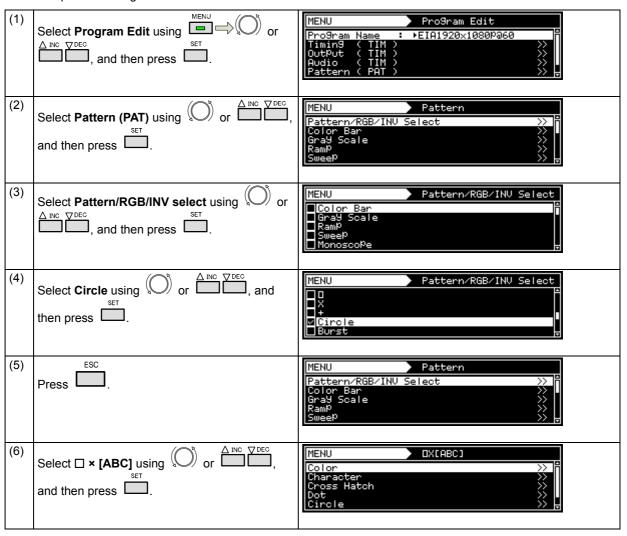


(7)	Select Circle using or or or and then press.	MENU Circle Format (0-6): ▶0
(8)	Select Format using or or or or then press . Select Format using or	Select the shapes of the circles from the options below. Format 0 • Single circle • Center: 1/2H, 1/2V • Radius: 1/3V Format 1
	Select the parameters using or	Concentric circles 1 Center: 1/2H, 1/2V Radius (from the center): 1/6V, 1/3V, 1/2V, 1/2H Format 2 Format 1 + (circles with radius 1/6V × 4)
	Select the parameters using the number keys (STATUS to), and then press .	 Format 3 Concentric circles 2 Center: 1/2H, 1/2V Radius (from the center): One circle added inside the 1/6V, 1/3V and 1/2 circles, 1/2 radius added
		 Format 4 Consecutive circles with radius 1/6V Top/bottom and left/right symmetry with center (1/2H, 1/2V) as the reference
		Format 5 Single filled-in circle Center: 1/2H, 1/2V Radius: 1/3V
		Format 6 • Filled-in circles with radius 1/6V × 5

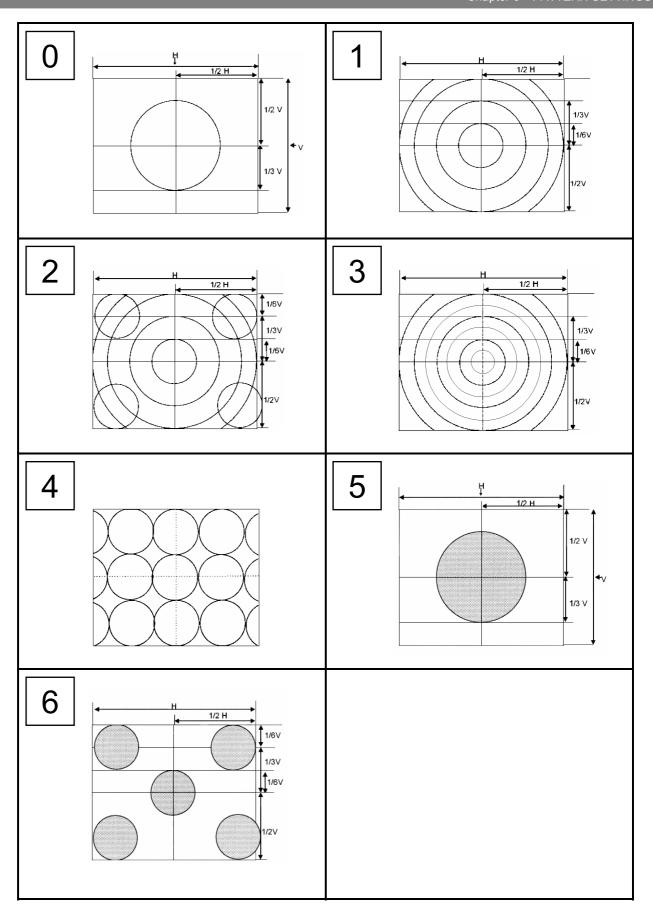

6.10.6 Burst patterns

In burst patterns, the line width increases gradually.



The burst pattern settings are described below.

(1)	Select Program Edit using or or \triangle INC \bigcirc DEC \bigcirc and then press \bigcirc .	MENU Program Edit Program Name : ►EIA1920x1080Pa60 Timin9 (TIM) OutPut (TIM) Audio (TIM) Pattern (PAT)
(2)	Select Pattern (PAT) using or or or and then press.	MENU Pattern Pattern/RGB/INV Select Color Bar Gray Scale Ramp Sweep >>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>
(3)	Select Pattern/RGB/INV select using or or and then press.	MENU Pattern/RGB/INV Select Color Bar Gray Scale Ramp Sweep Monoscope
(4)	Select Burst using or or or and then press.	MENU Pattern/RGB/INV Select Concle Burst
(5)	Press .	MENU Pattern Pattern/RGB/INV Select Color Bar Gray Scale Ramp Sweep Sweep
(6)	Select □ × [ABC] using or □ or □ □, and then press □.	MENU DX[ABC] Color Character Cross Hatch Dot Circle
(7)	Select Burst using or or or or and then press.	MENU Burst Format (0-7): ▶L->R Number Of Lines : 5 Step : idot

(8)	<setting items="" the=""></setting>	For further details, refer to <table burst="" items="" of="" setting=""></table>
	Select the items using or or important and a select the items using or important and incomplete the selection of the selectio	below.
	•	
	then press .	
	<setting parameters="" the=""></setting>	
	Select the parameters using or or or	
	, and then press .	
	Alternatively:	
	Select the parameters using the number keys	
	0/STATUS 9/F ₺ SET	
	(L to L), and then press L.	

<Table of burst setting items>

(1)	Format (0-2)	Th	The origin point of the pattern drawing is set here.		
			L->R	The line width increases from left to right.	
			L<-R	The line width increases from right to left.	
			L<-C->R	The line width increases from the center to the left edge and from the center to the right edge.	
		3	L->C<-R	The line width increases from the left edge to the center and from the right edge to the center.	
		4	4 T->B The line width increases from top to bottor		
		5	5 T<-B The line width increases from bot		
		6	T<-C->B	The line width increases from the center to the top edge and from the center to the bottom edge.	
		7	T->C<-B	The line width increases from the top edge to the center and from the bottom edge to the center.	
(2)	Number of Line	Aft an	The number of lines set here are repeatedly drawn with the same thickness. After the set number of lines have been drawn, the thickness is increased by an amount equivalent to the Step setting , and this is repeated. Setting range: 1 to 99		
(3)	Step		The step is set here. Setting range: 0 to 99 [dot]		

6.11 Window patterns

Mono-color rectangles can be displayed as the window patterns.

The window patterns can also be used to check moving images using the action function described later (refer to the action settings).

6.11.1 Types of window patterns

When window has been selected using the pattern key, for instance, window patterns can be selected from among the types listed below.

0	1 Window	1 window displayed	
1	4 Window	4 windows displayed	
2	9 Window	9 windows displayed	
3	16 Window	16 windows displayed	
4	25 Window	25 windows displayed	
5	64 Window	64 windows displayed	
6	3 Window In V Row	3 windows in a vertical row displayed	
7	3 Window In H Row	3 windows in a horizontal row displayed	
8	User Pos Center	Window displayed at the position of the user's choice * The coordinates of the window center are specified as the origin point of the display.	
9	User Pos Corner	Window displayed at the position of the user's choice * The coordinates of the top left of the window are specified as the origin point of the display.	Position-1: H. Size: H Size: V


6.11.2 Window pattern settings

The types of window patterns can be selected using the procedure below.

(1)	Select Program Edit using or SET, and then press.	MENU Program Edit Program Name : ►EIA1920x1080Pa60 Timin9 (TIM) OutPut (TIM) Audio (TIM) Pattern (PAT)
(2)	Select Pattern (PAT) using or or or and then press .	MENU Pattern Pattern/RGB/INV Select Color Bar Gray Scale Ramp Sweep
(3)	Select Pattern/RGB/INV select using or or and then press.	MENU Pattern/RGB/INV Select Color Bar Gray Scale RamP Sweep Monoscope
(4)	Select Window using or or or and then press.	MENU Pattern/RGB/INV Select Window Cursor Name/List R/Pr G/Y
(5)	Press .	MENU Pattern Pattern/RGB/INV Select Color Bar Gray Scale Ramp Sweep Pattern Pattern Sylvation Pattern Pattern Sylvation Pattern Pattern Sylvation Pattern Sylvation Pattern Sylvation Pattern Pattern Sylvation Pattern Pattern Pattern Pattern Sylvation Pattern Sylvation Sylvation Pattern Sylvation Sylvation Pattern Pattern Sylvation Sylvation Sylvation Sylvation Sylvation Pattern Pattern Pattern Pattern Pattern Sylvation Pattern Patt
(6)	Select Window using or or or and then press.	MENU Window Sbit
(7)	Selecting the items> Select the items using or	For further details on the parameters, refer to Table of window setting items > below.
	Select the parameters using or	

<Table of window setting items>

(1)	Format (0-9)	The window display format is set here.		
	, ,	0	1 Window	One window is displayed at the center of the screen.
		1	4 Window	The screen is divided into four areas, and each of the four windows is displayed in the center of its respective area. The window size is set using the area divided into the four areas as 100%.
		2	9 Window	The screen is divided into four areas, and each of the nine windows is displayed in the center of its respective area.
		3	16 Window	The screen is divided into four areas, and each of the sixteen windows is displayed in the center of its respective area.
		4	25 Window	The screen is divided into four areas, and each of the thirty-two windows is displayed in the center of its respective area.
		5	64 Window	The screen is divided into four areas, and each of the sixty-four windows is displayed in the center of its respective area.
		6	3 Window In V Row	The screen is divided vertically into three areas, and each of the three windows is displayed in the center of its respective area.
		7	3 Window In H Row	The screen is divided horizontally into three areas, and each of the three windows is displayed in the center of its respective area.
		8	User Pos Center	The window can be displayed at any position. The coordinates of the window center are specified as the origin point of the window display. Position-1:V Position-1:V Sizer Sizer
		0	User Pos Corner	The window can be displayed at any position. The coordinates of the top left of the window are specified as the origin point of the window display. Position-T:H SizeH Position-T:V Size:V
(2)	Input Mode	The input mode for the window size and display position is specif		· · · · · · · · · · · · · · · · · · ·
		0	%	The size and position are set as a percentage of the entire screen.
		1	dot	The size and position are set in 1-dot increments.
(3)	Size	The window size is set here. The setting procedure differs depending on the Input Mode setting.		

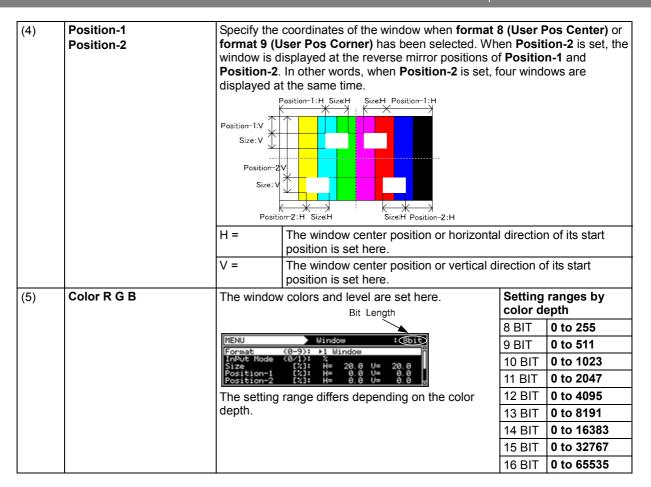

6.12 Cursor patterns

A cursor can be displayed on screens which show pattern displays.

The cursor can be moved to any point, and its position on the screen can be displayed.

6.12.1 Cursor settings

The cursor can be selected by following the operation procedure below.

For further details on pattern selection, refer to "2.1.3 Selecting the pattern data."

(1)	Select Program Edit using or \triangle inc. \bigcirc or \triangle inc. \bigcirc or \bigcirc inc. \bigcirc inc. \bigcirc or \bigcirc inc. \bigcirc i	MENU ProGram Edit ProGram Name : ►EIA1920x1080Pa60 Timing < TIM > >> OutPut < TIM > >> Audio < TIM > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > >> Pattern < PAT > Pattern < PAT > >> Pattern < PAT > Pattern
(2)	Select Pattern (PAT) using or $\stackrel{\triangle \text{INC}}{\longrightarrow}$ or $\stackrel{\nabla \text{DEC}}{\longrightarrow}$, and then press $\stackrel{\text{SET}}{\longrightarrow}$.	MENU Pattern Pattern/RGB/INV Select Color Bar Gray Scale Ramp Sweep Sweep
(3)	Select Pattern/RGB/INV select using or or and then press.	MENU Pattern/RGB/INV Select Color Bar
(4)	Select Cursor using or or or and then press.	MENU Pattern/RGB/INV Select Window ©Cursor Name/List © R/Pr ☑ G/Y
(5)	Press ESC.	MENU Pattern Pattern/RGB/INV Select Color Bar Gray Scale Ramp Sweep
(6)	Select Cursor using or or or and then press.	MENU Cursor : 8bit Format (0-3): ▶HU-Line SteP (0-2): 10dot Coordinate (0-4): Normal-2 Blink (0-7): None Sub Pixel (0/1): OFF
(7)	Selecting the items> Select the items using or or □□□, and then press □. Setting the parameters> Select the parameters using □ or □□□	For further details on the parameters, refer to Table of cursor setting items below.
	DEC, and then press . Alternatively: Select the parameters using the number keys O/STATUS (

<Example of what is displayed>

Coordinates of target cursor (#1 = cursor 1, #2 = cursor 2 when Cursor 2 is ON)

#1(GATE=541 :STEP10)
(R=2881 G=2882 B=2883)

Cursor 1

— Cursor 2

<Table of cursor setting items>


(1)	Format (0-3)	The shap	e of the cursor is	set here.
		0	5 × 5 Cross	The cursor is displayed as a 5-pixel × 5-pixel cross.
		1	HV-Line	The cursor is displayed as a cross whose horizontal and vertical dimensions extend to the edges of the screen.
		2	V-Line	The cursor is displayed as a vertical line.
		3	Dot	The cursor is displayed as a 1-pixel × 1-pixel.
(2)	Step	The amou	unt of cursor move	ement when the cursor is to be moved is set here.
		0 to 2	1 dot/10 dot/100 dot	
(3)	Coordinate		dinate display me	
		0	OFF	No coordinates are displayed.
		1	Normal-1	The horizontal and vertical coordinates and step are displayed in 1-pixel increments.
		2	Normal-2	The horizontal and vertical coordinates are displayed in sub-pixel increments, and the step is displayed in 1-pixel increments.
		3	Reverse-1	Normal-1 is inverted at the top and bottom, and displayed.
		4	Reverse-2	Normal-2 is inverted at the top and bottom, and displayed.
(4)	Blink	Whether	the cursor is to bli	ink and the blink interval are set here.
		0	None	The cursor does not blink.

		1 to 7	1 V /2 V /4 V /8 V /16 V /32 V /64 V	The cursor blinks for ear period) to 64 V and ther repeated.		
(5)	Sub Pixel	Whether the cursor is to be moved in 1-pixel increments or sub-pixel			ıb-pixel	
		increments				
		[Operation in sub-pixel increments]				
		$\begin{array}{c c} \text{Right} \rightarrow & \rightarrow & \rightarrow & \rightarrow & \rightarrow & \rightarrow \\ \hline R & \leftarrow & G & \leftarrow & B & \leftarrow & B \\ \hline \end{array} \leftarrow \begin{array}{c c} B & \leftarrow & B & \leftarrow & Left \\ \hline \end{array}$				
		0	OFF	The cursor is moved in	1-pixel in	crements.
		1	ON	The cursor is moved in a	sub-pixel	increments.
(6)	Overlay			displayed on top of the to sing the Color Back R G E		
		0	OFF	The cursor is displayed color set by the Color Ba		
		1	ON	The cursor is displayed	on top of	the test pattern.
(7)	Intersection	The shape	of the intersection	on is set here.		
		0	Normal	The intersection is filled	in as a c	ross.
		1	Space	The cursor is not displayed in the pixels of the intersection and sub-pixels below it, but the original background is displayed instead.		it, but the
(8)	Cursor 2	The display	of the second of	cursor (cursor 2) is set he	re.	
		0	OFF	The cursor is not display	yed.	
		1	ON	The cursor is displayed.		
(9)	Color Cursor 1 R G B		1 color and leve range differs de	el are set here.	Setting color de	ranges by epth
		depth.			8 BIT	0 to 255
					9 BIT	0 to 511
					10 BIT	0 to 1023
					11 BIT	0 to 2047
					12 BIT	0 to 4095
					13 BIT	0 to 8191
					14 BIT	0 to 16383
					15 BIT	0 to 32767
					16 BIT	0 to 65535
(10)	Color Cursor 2 R, G, B		2 color and leve			
		The setting	procedure is the	e same as for the Color C	Cursor 1	R G B item.
(11)	Color Back R G B	The background color and level are set here. However, when On has been selected as the Overlay item setting, the test pattern becomes the background so that this setting is canceled.				
		The setting	procedure is the	e same as for the Color C	Cursor 1	R G B item.


6.12.2 Cursor operations

The cursor operations which can be performed include moving the cursor and changing the cursor level.

Operation screen display




Moving the cursor

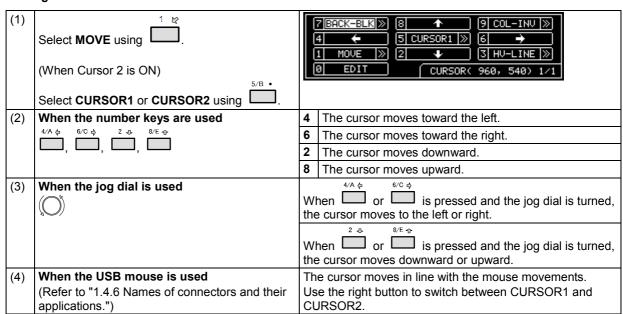

Changing the cursor level

These steps change the Color Cursor 1 R, G, B and Color Cursor 2 R, G, B settings.

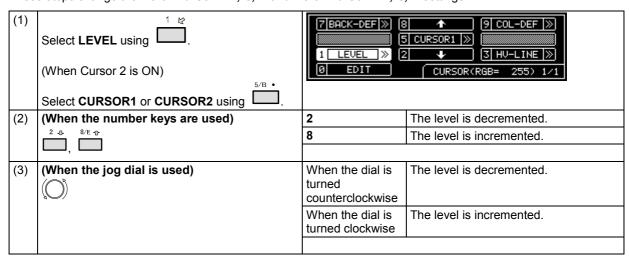

Changing the background level

These steps change the Color Back R, G, B settings.

(1)	Select LEVEL-BK using $\frac{1}{1}$ & Select BACK-DEF using $\frac{1}{1}$.	7 BACK-DEF » E 1 LEVEL-BK » 2 0 EDIT	CURSOR1 >>
(2)	(When the number keys are used)	2	The level is decremented.
	2 & 8/E &	8	The level is incremented.
	<u> </u>		
(3)	(When the jog dial is used)	When the dial is turned counter-clockwise	The level is decremented.
		When the dial is turned clockwise	The level is incremented.

Changing the cursor shape

These steps change the **Format** setting.

3 8	5x5CROSS	Cross consisting of 5 × 5 pixels
	HV-LINE	Cross which covers the entire screen
	V-LINE	Vertical line
	DOT	1 × 1 pixel

Changing the background color

7/D ß	BACK-DEF	Color Back R, G, B settings
	BACK-W	White
	BACK-R	Red
	BACK-G	Green
	BACK-B	Blue
	BACK-BLK	Black

Inverting the cursor color

9/F &	COL-DEF	Normal
	COL-INV	Inverted

6.13 Name/List


Information such as the setting data and execution results as well as the images (number of colors restricted) are contained in the Name/List patterns, and they can be superimposed onto other patterns.

<Name/List types>

NAME/LIST	NAME	Program name display	For details, refer to "6.13.2 Name."	
	EDID	EDID setting data display	For further details, refer to "6.13.3 EDID."	
	DDC/CI	DDC-CI setting data display	For further details, refer to "6.13.4 DDC/CI."	
	HDCP HDCP authentication screen display.		For further details, refer to 6.13.5 HDCP (High-bandwidth Digital Content Protection)."	
			For further details, refer to "4.2.4 CEC function."	
	HDMI	HMDI setting data display	For further details, refer to "6.13.6 HDMI list."	
			For further details, refer to "6.13.7 Timing data list."	
	OPT-USER User optional pattern list F		For further details, refer to "6.13.8 Image pattern list."	
			For further details, refer to "6.13.9 OPT-USER pattern list."	
	DP	Display port setting information display (link rate, number of lanes, link training results, DPCD)	For details, refer to "4.12.3 Displaying the DisplayPort setting information."	
		for the subtitles created by the	For details, refer to "6.13.10 Subtitle."	

6.13.1 Name/List display

The Name/List functions can be selected by the operations described below.

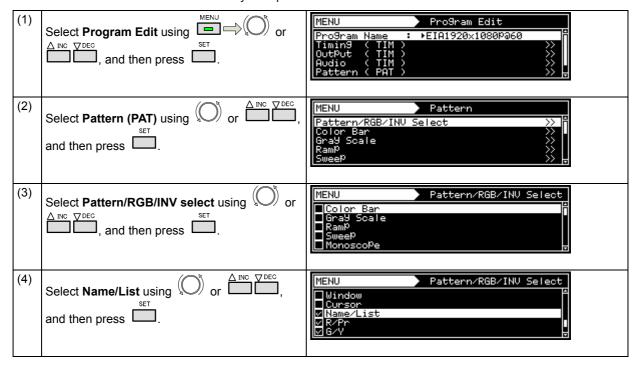

(5)	Press	PEC GRESS	ENU attern/RGB/INV blor Bar ray Scale amp weeP	>> >> >>
	Select Name/List using or , and then press.	THE SELECT	ENU JRe (0-0 JME Jbtitle JD JC/CI	>> >>
(7)	Selecting the items> Select the items using or □□□, and	The pattern to be displayed by Type is specified here. Some patterns have detailed setting items. <type></type>		
	then press .	0	NAME	The names of the programs are displayed.
		1	Subtitle	The images to be used for the subtitles created by the user are displayed.
	<setting parameters="" the=""></setting>	2	EDID	The EDID is displayed as text.
	Select the parameters using or or or or	3	EDID (HEX)	The EDID is displayed in the hexadecimal (HEX) format.
	and then press.	4	DDC/CI	DDC/CI is used.
	Alternatively: Select the parameters using the number keys	5	HDCP	The HDCP authentication screen is displayed.
	(to), and then press .	6	Timing	A list of the timing data being output is displayed.
		7	Image	Information of the image patterns registered in the internal memory or on the CF card is displayed.
		8	OPT-USER	The names and sizes of the user optional patterns registered in the internal memory or on the CF card is displayed.
		9	CEC	The CEC execution list is displayed.
		Α	HDMI	A list of the HDMI-related data is displayed.
		В	DP	DHCP is displayed.
		С	DP (HEX)	DHCP is displayed in the hexadecimal (HEX) format.

6.13.2 Name

The display method can be set when Name has been selected as the Type setting.

(1)	Select Program Edit using or or or and then press .	MENU
(2)	Select Pattern (PAT) using or or or and then press.	MENU Pattern Pattern/RGB/INU Select Color Bar Gray Scale Ramp Sweep >>> >> >>> >> >>> >> >>> >>> >>> >>> >> >>> >>> >>> >>> >> >> >> >> >> >> >>> >>
(3)	Select Pattern/RGB/INV select using or or and then press.	MENU Pattern/RGB/INV Select Color Bar
(4)	Select Name/List using or	MENU Pattern/RGB/INV Select Window Cursor ✓ Name/List ✓ R/Pr ✓ G/Y
(5)	Press .	MENU Pattern Pattern/RGB/INU Select Color Bar Gray Scale Ramp Sweep >>> >> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >> >> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >> >>> >>> >>> >>> >>> >>> >>> >>> >>> >> >>> >> >>> >> >>> >> >>
(6)	Select Name/List using or	MENU Name/List Type (0-C): ▶NAME NAME Subtitle EDID DDC/CI Name/List
(7)	Select Name using or or or then press.	MENU Name Format (0-3): ▶ProGram Name Position (0-6): ToP-Left Font (0-2): 7×9 Overscan [½]: H= 10 V= 10 Pattern Name : Character List
(8)	Select the items using or	For further details, refer to <table items="" name="" of="" setting=""> below.</table>


<Table of name setting items>


(1)	Format (0-3)	The	e display contents of Nar	ne are set here.	
		0	Program Name	The program names are displayed.	
		1	Pattern Name	The pattern names are displayed.	
		2	Program & Pattern Name	The program names and pattern names are displayed at the same time.	
		3	Program Name, Freq	The program names and video timing signal frequencies are displayed at the same time.	
(2)	Position	The	e display position of the r	name is set here.	
		0	Center	The name is displayed at the screen center.	
		1	Top-Left	The name is displayed at the top left of the screen.	
			Bottom-Left	The name is displayed at the bottom left of the screen.	
			Top-Right	The name is displayed at the top right of the screen.	
		4	Bottom-Right	The name is displayed at the bottom right of the screen.	
		5	Top-Center	The name is displayed at the upper center of the screen.	
		6	Bottom Center	The name is displayed at the lower center of the screen.	
(3)	Font	The	e font size is set here.		
		0	5 × 7	5 × 7 is set as the font size.	
		1	7 × 9	7 × 9 is set as the font size.	
		2	16 × 16	16 × 16 is set as the font size.	
(4) Overscan [%]		The display position can be hidden to simulate an overs		e adjusted in such a way that the display is not scanning monitor.	
		H =		Set the horizontal overscanning ratio.	
		V =	=	Set the vertical overscanning ratio.	
(5)	Pattern Name		e pattern names are editor r details on the editing pr	ed here. ocedure, refer to "2.3 Setting the names."	

6.13.3 EDID

The EDID of the connected display can be displayed on the screen.


a) EDID display method

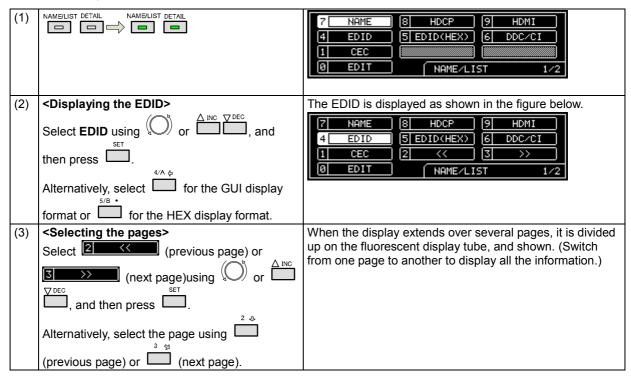

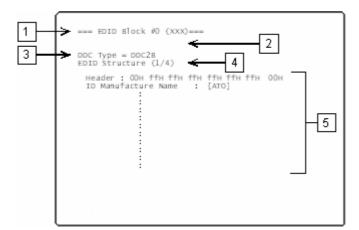

With the GUI display format

- 1) Block number of EDID
- 2) Error display when an error has occurred
- 3) DDC type
- 4) EDID block now displayed
- 5) Content of EDID

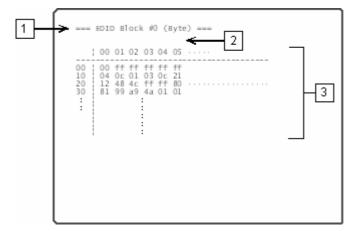


With the HEX display format

- 1) Block number of EDID
- 2) Error display when an error has occurred
- 3) Content of EDID

b) Port selection method

The EDID is displayed by only one video interface at a time, and it is necessary to set the video interface which is to display the EDID.

In addition to HDMI, EDID can be also displayed using the DVI or VGA interface.

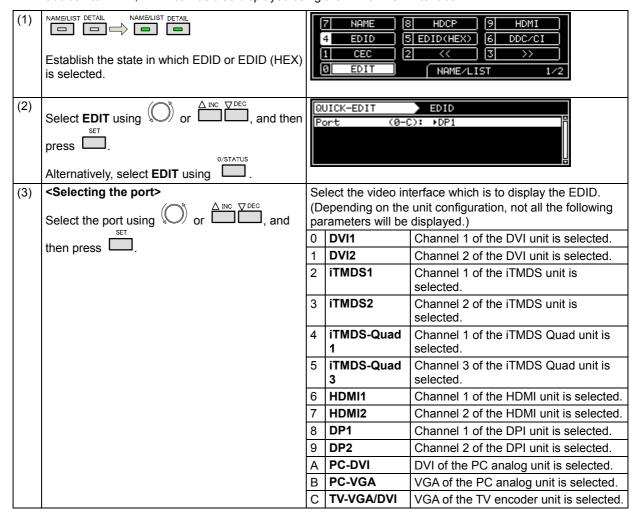


6.13.4 DDC/CI


Using the DVI and VGA connectors, the DDC/CI commands can be sent and received, and shown on the display.

Two modes are available for DVI/CI: the **Get** (**Get VCP Feature**) mode in which the setting data is loaded from the information set in the display at the connection destination, and the **Set** (**Set VCP Feature**) mode in which the data of the user's choice is set.

<Setting DDC/CI>

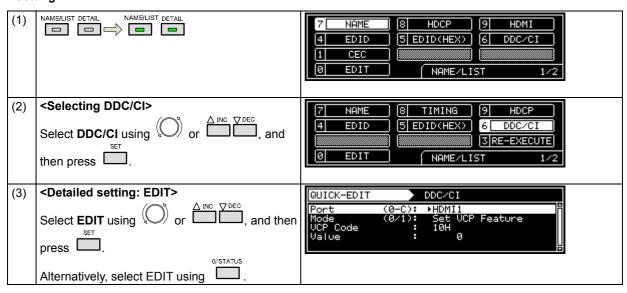


<Re-executing DDC/CI>

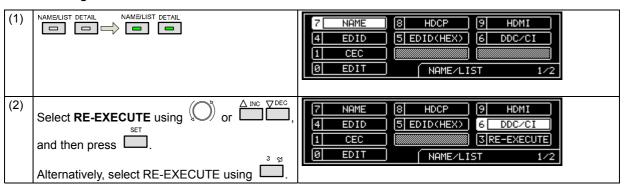

<Table of DDC/CI setting items>

(1)	Port (0-C)	The port for using DDC/CI is set here.				
		0	DVI1	DDC/CI is used by the DVI1 port.		
		1	DVI2	DDC/CI is used by the DVI2 port.		
		2	iTMDS1	DDC/CI is used by channel 1 of the iTMDS unit.		
		3	iTMDS2	DDC/CI is used by channel 2 of the iTMDS unit.		
		4	iTMDS-Quad	DDC/CI is used by channel 1 of the iTMDS		
			1	Quad unit.		
		5	iTMDS-Quad	DDC/CI is used by channel 3 of the iTMDS		
			3	Quad unit.		
		6	HDMI1	DDC/CI is used by the HDMI1 port.		
		7	HDMI2	DDC/CI is used by the HDMI2 port.		
		8	DP1	DDC/CI is used by the DisplayPort1.		
		9	DP2	DDC/CI is used by the DisplayPort2.		

		А	PC-DVI	DDC/CI is used by the DVI port of the PC analog unit.		
		В	PC-VGA	DDC/CI is used by the VGA port of the PC analog unit.		
		С	TV-VGA/DVI	DDC/CI is used by the DVI port of the TV encoder unit.		
(2)	Mode (0/1)	The operating mode is set here.				
		0	Get VCP Feature	The status of the connection destination is checked.		
		1	Set VCP Feature	The control commands are sent to the connection destination.		
(3)	VCP Code	00H-FFH	The VCP code is set.			
(4)	Value	0-65535	A value is set only when Set VCP Feature has been selected a the Mode setting.			

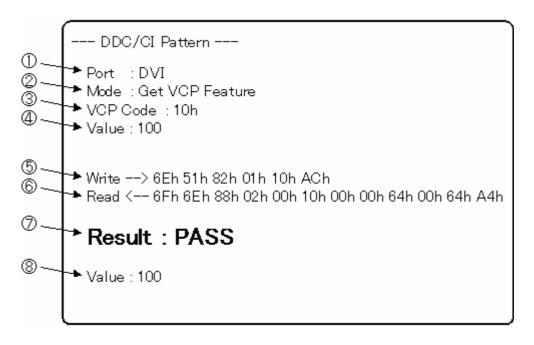


1	Port	Output port from which DDC/CI is transferred	Items to be set by the generator
2	Mode	DVI or Dsub DDC/CI transfer mode Get VCP Feature: The status of the connection destination is received. Set VCP Feature: Control commands are sent to the connection destination.	generator
3	VCP Code	Transfer command (set using the hexadecimal format)	
4	Value	(Displayed only when Set VCP Feature has been selected as the Mode setting.) Parameter value to be transferred from the generator to the connection destination	
5	Write	Data sent from the generator	Items which display the receiving or sending results
6	Read	Data received by the generator	
7	Result	Transfer result PASS: Data was transferred successfully. NG: Transfer failed.	
8	Value	(Displayed only when Get VCP Feature has been selected as the Mode setting.) Parameter value received by the VG-870 or 871 from the connection destination	


6.13.5 HDCP (High-bandwidth Digital Content Protection)

The HDCP authentication results can be shown on the display.

(For details on the HDCP settings and execution refer to "8. HDCP SETTINGS AND EXECUTION")

<Displaying the HDCP authentication screen>

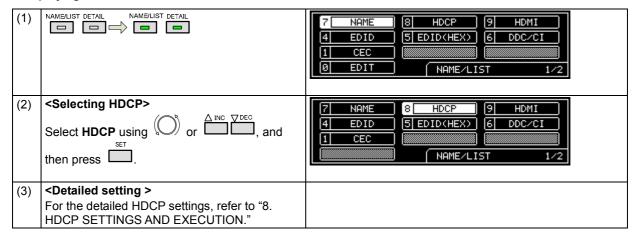

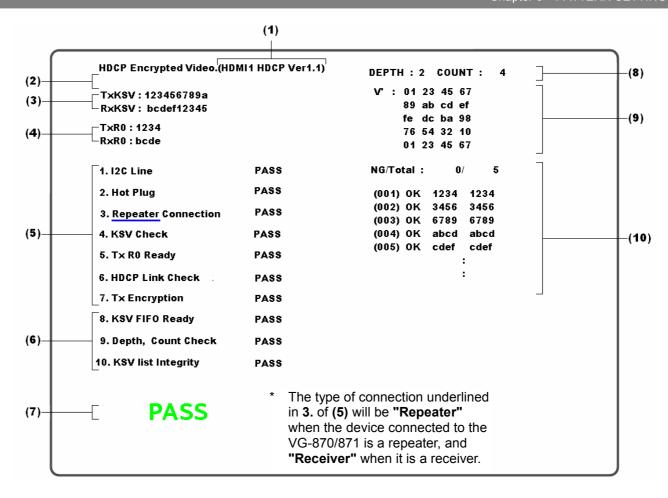

Details of the information shown on the screen are given below.

<HDCP authentication screen display data>


(1)	This indicates the port selected in c) Display Select of "8.2.1 Execution procedure" (When the HDCP authentication is successful, the HDCP version is displayed beside the port; when it has failed, an error message is displayed beside the port.)					
(2)	The EDID reading results are indicated here. (The results are displayed only when AUTO has been selected as the HDMI or DVI setting in "4.2.2 HDMI setting procedure" or when "EDID Check" has been selected as the Version setting in "8.1 HDCP settings.")					
(3)	The Key Selection Vectors are displayed here among the HDCP keys. "TxKSV" is the key selection vector of the transmitter; "RxKSV" is the key selection vector of the receiver.					
(4)	The Synchronization Verification Values calculated by the initial authentication are displayed here. "TxR0" is the value calculated for the transmitter; "RxR0" is the value calculated for the receiver.					
(5)	The authentication status of the initial authentication is displayed here. An item with "PASS" denotes a					
(6)*	The authentication status of the second authentication for a repeater is displayed here. item that has been successfully authenticated.					
(7)	If all the authentications have been carried out successfully, "PASS (grappears.	een)" appears; otherwise, "NG (red)"				
(8)*	The DEPTH (number of stages) and COUNT (total number of connections) of the devices connected beyond the receiver which in turn is connected to the VG-870B/871B are shown here.					
(9)*	The value (V') shown here is for verifying the adequacy of the KSV list of the devices connected beyond of the receiver which in turn is connected to the VG-870B/871B.					
(10)	Shown here are the Synchronization Verification Values (Ri, Ri') for che Ri is the value calculated for the transmitter; Ri' is the value calculated when the transmitter and receiver values match. (If OK resulted from a	for the receiver. "OK" is displayed				

- * This information is displayed only when the device connected to the VG-870B/871B is a repeater.
- * Items (6) and (8) to (10) are not displayed for DisplayPort output.

6.13.6 HDMI list

The HDMI list display can be selected by pressing the NAME/LIST pattern key while the output from the HDMI connector is connected to the display. Information on the signals which are input to the display from the HDMI connector is shown on the display.


Example: HDMI list when EIA 1280 × 720 and 59.94 Hz output signals are supplied to the display

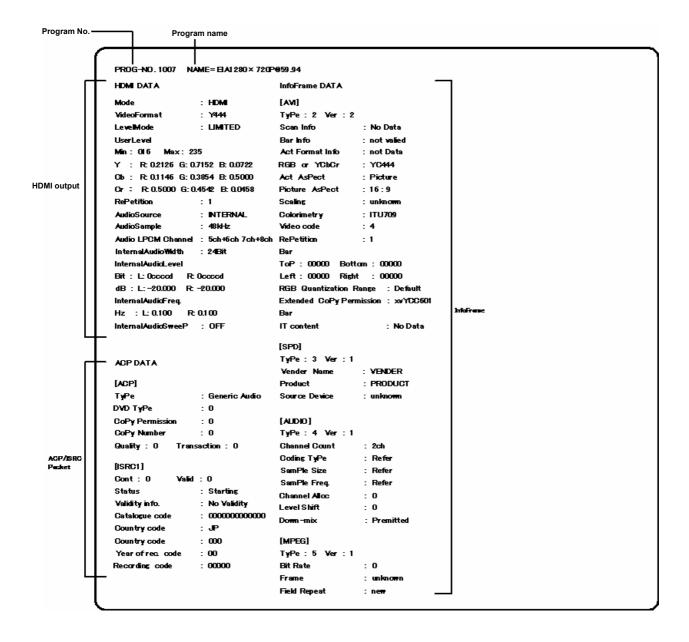

6.13.7 Timing data list

The timing data list display can be selected by pressing the NAME/LIST pattern key while the generator output is connected to the display. The timing data (such as the parameters) of the signals which are input to the display from the output connector is shown on the display.


Example: Timing list when EIA 1280 × 720 and 59.94 Hz output signals are supplied to the display

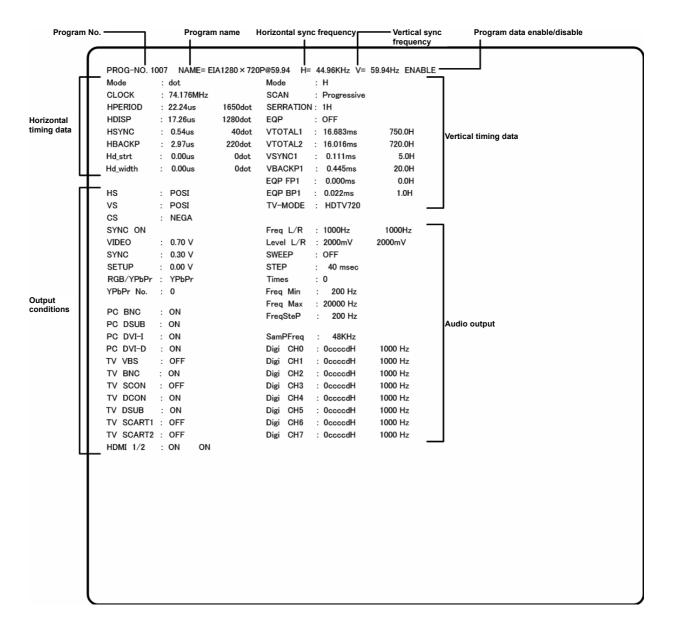

6.13.8 Image pattern list

When the image list display is selected by pressing the NAME/LIST key while the generator output is connected to the display, the information on the image patterns registered in the internal memory or on the CF card is shown on the display.

If the CF card has been inserted, the information on the CF card is displayed; otherwise, the information in the internal memory is displayed.

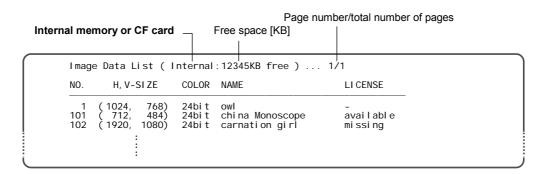

NO.: Image number

H, V-SIZE: Image size (width [dots], height [dots])

COLOR: Number of bits per dot

NAME: Image name

LICENSE: - No license required (standard)

available The license has been registered so the image list can be used. (option) **missing** The license has not been registered so the image list cannot be used by this generator. (option)


If the total number of pages exceeds 2, the pages can be selected using



6.13.9 OPT-USER pattern list

When the OPT-USER pattern list display is selected by pressing the NAME/LIST key while the generator output is connected to the display, the names and sizes of the user optional patterns registered in the internal memory or on the CF card are shown on the display.

If the CF card has been inserted, the names and sizes of the patterns on the CF card are displayed; otherwise, the names and sizes of the patterns in the internal memory are displayed.

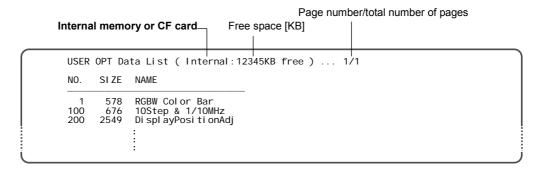

NO.: Pattern number SIZE: Pattern size [bytes] NAME: Pattern name

If the total number of pages exceeds 2, the pages can be selected using



6.13.10 Subtitle

The image patterns (*) created by the user are displayed.


Scrolling is possible using the action settings. (Refer to "7.5 Subtitle scrolling.")



* Unlike the images in "6.9 Image/OPT," the images which can be displayed here are subject to restrictions on the number of colors and other aspects.
They are created and registered using the Windows software program (SP 8870) which is proved.

They are created and registered using the Windows software program (SP-8870) which is provided with the VG generator. For details, refer to the operating instructions of the SP-8870.

The procedure for setting the parameters is outlined below.

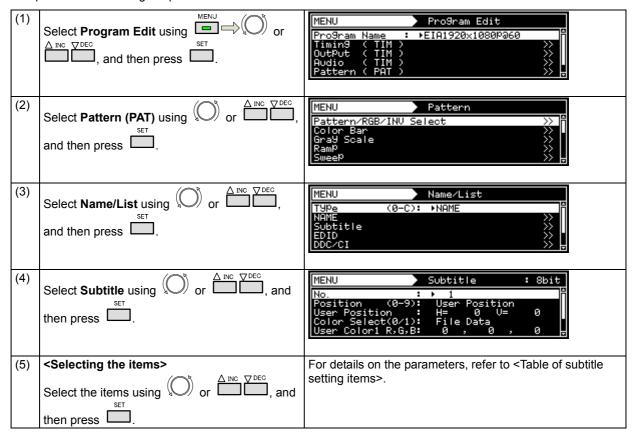


<setting parameters="" the=""></setting>	
Select the parameters using $^{\Diamond}$ or $^{\triangle \text{ INC}}$	
$\stackrel{\nabla}{\bigsqcup}$, and then press $\stackrel{\text{SET}}{\bigsqcup}$.	
Alternatively:	
Select the parameters using the number keys	
(to), and then press .	

<Table of subtitle setting items>

(1)	No.	The number of the image pattern to be displayed is set here. Setting range: 1 to 200				
(2)	Position (0-9)		e position where the patte	ern is to be displayed is s	set here	
(-)		0	User Position	Setting position of User		in (3)
		1	Top-Left	Top left		(-)
		2	Middle-Left	Center left		
		3	Bottom-Left	Bottom left		
		4	Top-Center	Center top		
		5	Center	Center		
		6	Bottom-Center	Center bottom		
		7	Top-Right	Top right		
		8	Middle-Right	Center right		
		9	Bottom-Right	Bottom right		
		The setting takes effect when User Position has been selecte Position setting. Setting range: 0 to 9999			d as the	
(4)	Color Select (0/1)	_	e display colors are set h			
		0	File Data	The colors of the image displayed in their original		data are
		1	User Color	The settings for User Co	olor1-3 in	(5) are used.
(5)	User Color1 to 3 R,G,B		e desired display colors a e setting takes effect whe		Color Depth	Setting range
		se	selected as the Color Select setting.			0 - 255
		Th	a aatting range differe de	nanding on the color	9BIT	0 - 511
		The setting range differs depend depth.		bending on the color	10BIT	0 - 1023
			P		11BIT	0 - 2047
					12BIT	0 - 4095
					13BIT	0 - 8191
					14BIT	0 - 16383
					15BIT	0 - 32767
					16BIT	0 - 65535

6.14 Video black/white reversal

The video levels can be reversed.

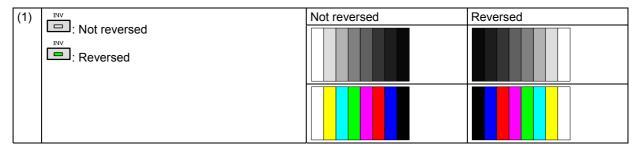

6.15 Simple animation

Simple animation sequences can be displayed by drawing a multiple number of images in the drawing area and moving the display start coordinates. The display method is described here uses an example of a simple animation sequence consisting of 640 × 480 images in nine frames.

6.15.1 Creating and registering the images

(1) Create the images.

The 640×480 images in nine frames are created as a 1920×1440 image which is three frames wide and three frames high. (See Fig. 6-15-1.)

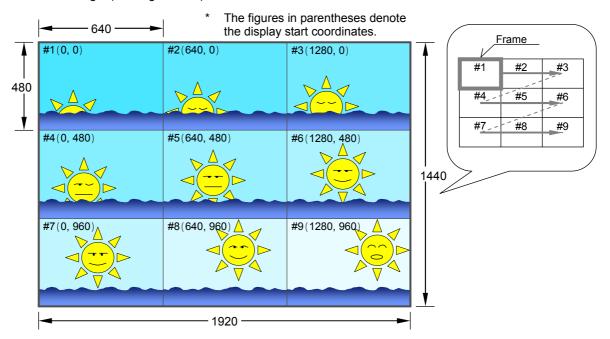


Fig. 6-15-1 Example of the images used for simple animation

- * The display shows images #1 to #9 with a 640 × 480 frame size in the sequence of #1, #2 and so on up to #9.
- (2) Register the created images as image data (No.1 to 200) on the CF card using the Windows software (SP-8870) provided.


6.15.2 Simple animation settings

Insert the CF card containing the registered images.	
* At this point, check that has not been pressed.	
Select the program No. using or	DIRECT-ALL No: 2 CF SAMPLE TP 8002:SimPle Animation 8004:Color Bar 100/108-H OUTPUT: [bit]
Select G-SCROLL using and and and then select EDIT using and and and then select EDIT using and and and then select EDIT using and	7 GC-SCROL 8 G-SCROLL 9 C-SCROLL 4 W-SCROLL 5 W-FLICKR 6 W-LEVEL 1 W-L. SEQ 2 M-BLUR 2 W-BLUR 4 W-SCROLL 4 W-SCROLL 5 W-FLICKR 6 W-LEVEL 4 W-SCROLL 4 W-SCROLL 5 W-FLICKR 6 W-LEVEL 4 W-SCROLL 4 W-SCROLL 4 W-SCROLL 5 W-FLICKR 6 W-LEVEL 4 W-SCROLL 4 W-SCROLL
Select Graphic Plane using or	QUICK-EDIT Action GraPhic Plane - SCROLL >> Character Plane - SCROLL >>
Selecting the items> Select the items using or □□□, and then press □.	QUICK-EDIT GraPhic Plane Scroll < ColorBar/GraYScale/RamP/Ima9e/ > Scroll (0/1): FON Direction (0-8): SimPle Animation Mode (0-4): User Interval 1: 10V
	Set only the items below. Scroll ON (1)
Select the parameters using or or	Direction Simple Animation (8)
<u> DEC</u> SET	Interval1 1 V to 255 V
	Repeat H = 3, V = 3
Select the parameters using the number keys	* This setting is for a 3 × 3 9-frame animation
	* For details of the parameter settings, refer to "7.3
	# Do not change any parameters not listed in the above
	* Do not change any parameters not listed in the above
	* At this point, check that has not been pressed. Select the program No. using or has not been pressed. Select the program No. using or has not been pressed. Select Graphic Plane using or has not been pressed. Select Graphic Plane using or has not been pressed. Select Graphic Plane using or has not been pressed. Select Graphic Plane using or has not been pressed. Select Graphic Plane using or has not been pressed. Select Graphic Plane using or has not been pressed. Select Graphic Plane using or has not been pressed.




ACTION SETTINGS

7.1 Concerning the planes

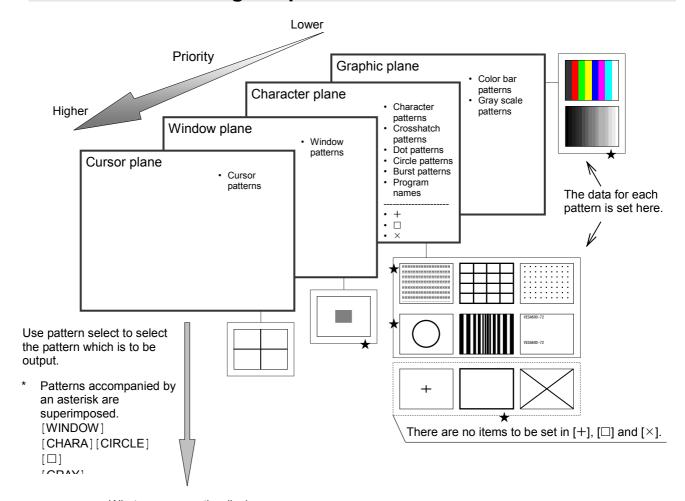

What appears as the display



7.2 Window actions

7.2.1 Scrolling

For details on the action selection procedure, refer to "2.1.4 Selecting the actions."


(1)	Select Program Edit using SET or and then press .	MENU
(2)	Select Action (PAT) using or or or and then press.	MENU Action GraPhic Plane
(3)	Select Window using or or or and then press.	MENU Window Scroll Flicker Level UP/Down Level Sequence Sequence
(4)	Select Scroll/Flicker using or or or and then press.	MENU Window Scroll/Flicker Scroll (9/1): PON Flicker (0/1): OFF Direction (0-A): Right Mode (0-4): User Interval 1: 1V
(5)	Select the items using or ☐ ☐ ☐ , and then press ☐ . Select the parameters using or ☐ ☐ ☐ ☐	For further details, refer to <table items="" of="" scroll="" setting="">.</table>
	o/status 9/F & set (to), and then press .	

<Table of scroll setting items>

(1)	OFF/ON (0/1)	On or Off is set for window scrolling here.		
(' /	(3.17	0		
		1	ON	Window scrolling is set to On.
(2)	Direction (0-A)	The direction of scrolling is set here.		
	, ,	0	Left	The window is scrolled toward the left.
		1	Right	The window is scrolled toward the right.
		2	Up	The window is scrolled upward.
		3	Down	The window is scrolled downward.
		4	Left Up	The window is scrolled toward the top left.
		5	Left Down	The window is scrolled toward the bottom left.
		6	Right Up	The window is scrolled toward the top right.
		7	Right Down	The window is scrolled toward the bottom right.
		8	Left<->Right	The window is scrolled toward the left and right.
		9	Up<->Down	The window is scrolled toward the top and bottom.
		Α	Random	The window is scrolled at random.
(3)	Mode (0-4)	Th	e interval (execution inter	rval) mode for window scrolling is set here.
		0	User	The window is scrolled as per the Interval 1-4 setting .
		1	60i->60i	The interval (execution interval) is set to 1 V.
		2	24p-> 60i 2-3PullDown	The interval (execution interval) is set to 2 V and 3 V, and repeated.
		3	25p->50i	The interval (execution interval) is set to 2 V.
		4	30p->60i	The interval (execution interval) is set to 2 V.
(4)	Interval (Interval 1)	The interval (execution interval) is set here. Setting range: 1 V to 255 V This setting takes effect only when User has been selected as the Mode setting .		
(5)	Step (Step 1)		·	er interval (execution interval) is set here.
		Н	Setting range: 1 dot to 2 This setting takes effect Direction setting.	55 dots only when Left or Right has been selected as the
		V	Setting range: 1H to 255 This setting takes effect Direction setting .	5H only when Up or Down has been selected as the
The fol	lowing items are selected only			
(6)	Interval 2 to 4	The interval (execution interval) is set here. Setting range: 0 V to 255 V When a setting other than "0" has been selected, the conditions which have been set are repeated in sequence starting with Interval 1. Example: Interval 1 → Interval 2 → Interval 3 → Interval 1 → ••••		
(7)	Step 2 to 4	The amount of movement per interval (execution interval) is set here. The amount of movement corresponding to the Interval 2-4 setting is set.		
		Н	Direction setting.	only when Left or Right has been selected as the
		V Setting range: 0H to 255H This setting takes effect only when Up or Down has been selected as the Direction setting .		

7.2.2 Flickering

For details on the action selection procedure, refer to "2.1.4 Selecting the actions"

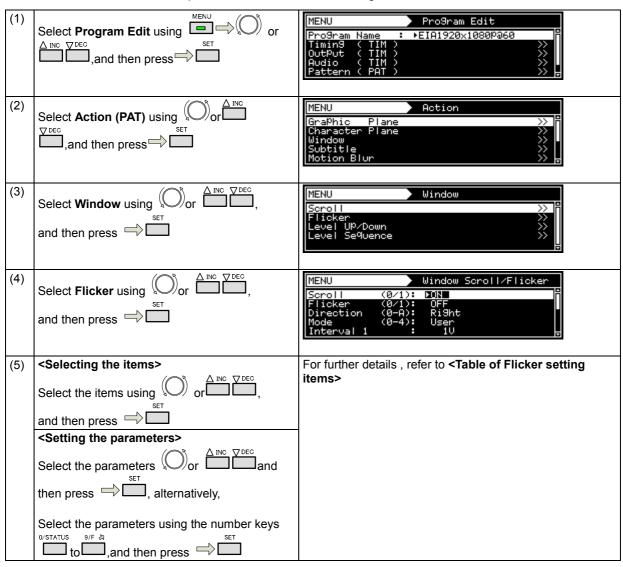

<Table of Flicker setting items>

(1)	OFF/ON (0/1)	On or Off is set for window flicker		
		0	OFF	Flicker is set to OFF
		1	ON	Flicker is set to ON
(2)	Interval	The interval (execution interval) is set here.		
		Setting range: 1 V to 255 V		

7.2.3 Level up/down actions

For details on the action selection procedure, refer to "2.1.4 Selecting the actions."

(1)	Select Program Edit using or or or and then press.	MENU Program Edit Program Name : ►EIA1920x1080Pa60 Timin9 (TIM)
(2)	Select Action (PAT) using or or or and then press.	MENU Action GraPhic Plane Character Plane Window Subtitle Motion Blur Action Action
(3)	Select Window using or or or and then press.	MENU Window Scroll Flicker Level UP/Down Level Sequence
(4)	Select Level Up/Down using or	MENU Level UP/Down OFF/ON (9/1): DON Direction (8/1): UP Interval : 1V SteP : 1
(5)	Selecting the items> Select the items using or	For further details, refer to <table down="" items="" level="" of="" setting="" up="">.</table>
	Select the parameters using or	

<Table of level up/down setting items>

(1)	OFF/ON (0/1)	Or	On or Off is set for level up/down here.		
		0	OFF	Level up/down is set to Off.	
		1	ON	Level up/down is set to On.	
(2)	Direction (0/1)	WI	Whether the level is to be increased or reduced is set here.		
0 Up		Up	The level is increased.		
		1	Down	The level is reduced.	
(3)	Interval	The interval (execution interval) is set here. Setting range: 1 V to 255 V			
(4)	Step	The amount of increase or reduction per interval (execution interval) is set here. Setting range: 1 to 255			

7.2.4 Level sequence action

For details on the action selection procedure, refer to "2.1.4 Selecting the actions."

(1)	Select Program Edit using SET or and then press .	MENU
(2)	Select Action (PAT) using or or or and then press.	MENU Action GraPhic Plane Character Plane Window Subtitle Motion Blur Action
(3)	Select Window using or or or then press.	MENU Window Scroll Flicker Level UP/Down Level Sequence Sequence
(4)	Select Level Sequence using or	MENU Level Sequence : 8bit OFF/ON (0/1): DON
(5)	Select the items using or or or , and then press . Select the parameters using or	For further details, refer to <table items="" level="" of="" sequence="" setting="">.</table>

<Table of level sequence setting items>

(1)	OFF/ON (0/1)	On or Off is set for level sequence here.		
		0 OFF	Level sequence is set to Off.	
		1 ON	Level sequence is set to On.	
(2) Number		The number of level sequences is set here. Setting range: 1 to 16		
		The sequences ar	re repeated in order for the number of times set here.	
(3)	1 to 16	The RGB levels and interval (execution interval) in each sequence are set here.		
		(R)	Set the R, G and B levels.	
		(G)	8-bit setting range:0 to 255	
		(B)	9-bit setting range:0 to 511	
			10-bit setting range:0 to 1023	
			11-bit setting range:0 to 2047	
			12-bit setting range:0 to 4095	
			13-bit setting range:0 to 8191	
			14-bit setting range:0 to 16383	
			15-bit setting range:0 to 32767	
			16-bit setting range:0 to 65535	
		(Time)	The interval (execution interval) is set here. Setting range: 1 V to 999 V	

7.3 Graphic plane scrolling actions

For details on the action selection procedure, refer to "2.1.4 Selecting the actions."

(1)	Select Program Edit using or \triangle inc ∇ DEC, and then press.	MENU
(2)	Select Action (PAT) using or or or or and then press .	MENU Action Graphic Plane Character Plane Window Subtitle Motion Blur
(3)	Select Graphic Plane using or	MENU GraPhic Plane Scroll < ColorBar/GrayScale/Ramp/ImaSe/ > Scroll (0/1): FON Direction (0-7): Left Mode (0-4): User Interval 1: 1V
(4)	Select the items using or image of the press of the parameters. Select the parameters using or image of the parameters. Select the parameters using or image of the parameters using or image of the parameters using the number keys of the paramet	For further details, refer to <table graphic="" items="" of="" plane="" setting="">.</table>

<Table of graphic plane setting items>

				h a ma
(1)	Scroll (0/1)	-	or Off is set for scrolling	
		0	OFF	Scrolling is set to Off.
		1	ON	Scrolling is set to On.
(2)	Direction (0-8)	-	e direction of scrolling is	
		0	Left	The window is scrolled toward the left.
		1	Right	The window is scrolled toward the right.
		2	Up	The window is scrolled upward.
		3	Down	The window is scrolled downward.
		4	Left Up	The window is scrolled toward the top left.
		5	Left Down	The window is scrolled toward the bottom left.
		6	Right Up	The window is scrolled toward the top right.
		7	Right Down	The window is scrolled toward the bottom right.
		8	Simple Animation	Simple animation
				For details, refer to "6.15.2 Simple animation settings."
(3)	Mode (0-4)	Th	e interval (execution inter	rval) mode for scrolling is set here.
		0	User	The window is scrolled as per the Interval 1-4 setting .
		1	60i->60i	The interval (execution interval) is set to 1 V.
		2	24p->60i 2-3PullDown	The interval (execution interval) is set to 2 V and 3 V, and repeated.
		3	25p->50i	The interval (execution interval) is set to 2 V.
		4	30p->60i	The interval (execution interval) is set to 2 V.
(4)	Interval (Interval 1)	Th	· ·	rval) is set here. Setting range: 1 V to 255 V
		Th se	This setting takes effect only when User has been selected as the Mode setting .	
(5) Step (Step 1) The amount of movement per interval (execution in				
		H Setting range: 1 dot to 40 This setting takes effect of Direction setting.		095 dots only when Left or Right has been selected as the
		V	Direction setting.	only when Up or Down has been selected as the
The fo	The following items are selected only when User has been selected as the Mode setting .			
(6)	Interval 2 to 4	WI be	The interval (execution interval) is set here. Setting range: 0 V to 255 V When a setting other than "0" has been selected, the conditions which have been set are repeated in sequence starting with Interval 1. Example: Interval 1 → Interval 2 → Interval 3 → Interval 1 → ••••	
(7)	Step 2 to 4	The amount of movement per interval (execution interval) is set here. The amount of movement corresponding to the Interval 2-4 setting is set.		
		 H Setting range: 0 dot to 4095 dots This setting takes effect only when Left or Right has been selected as Direction setting. V Setting range: 0H to 4095H 		
			This setting takes effect only when Up or Down has been selected as the Direction setting .	
(8)	Repeat	The number of images in the width and height dimensions to be used for the simple animation is specified here.		
			For details, refer to "6.15.2 Simple animation settings."	
			H Setting range: 1 to 16	
		The number of images arranged horizontally is specified here.		
		V Setting range: 1 to 64		
				arranged vertically is specified here.
	•	-		

7.4 Character plane scrolling actions

For details on the action selection procedure, refer to "2.1.4 Selecting the actions."

(1)	Select Program Edit using SET or and then press .	MENU
(2)	Select Action (PAT) using or or or and then press .	MENU Action Graphic Plane Character Plane Window Subtitle Motion Blur
(3)	Select Character Plane using or	MENU Character Plane Scroll (Chara/Cross/Dot/D/X/+/Circle/Burst/) Scroll (0/1): FON Direction (0-7): Left Mode (0-4): User Interval 1: 1V
(4)	Select the items using or image of the items using or image of the items using or image of the press in the parameters. Select the parameters using or image or image of the parameters using or image of the parameters using the number keys of the parameters usin the number keys of the parameters using the number keys of the	For further details, refer to <table character="" items="" of="" plane="" setting="">.</table>

<Table of character plane setting items>

(1)	Scroll (0/1)	On or Off is set for scrolling here.		
(')	Geron (6/1)	0	OFF	Scrolling is set to Off.
		1	ON	Scrolling is set to On.
(2)	Direction (0-7)		e direction of scrolling is	•
(2)	Bircollon (0-1)	0	Left	The window is scrolled toward the left.
		1	Right	The window is scrolled toward the right.
		2	Up	The window is scrolled upward.
		3	Down	The window is scrolled downward.
		4	Left Up	The window is scrolled toward the top left.
		5	Left Down	The window is scrolled toward the bottom left.
		6	Right Up	The window is scrolled toward the top right.
		7	Right Down	The window is scrolled toward the bottom right.
(3)	Mode (0-4)	The interval (execution interval) mode for scrolling is s		
		0	User	The window is scrolled as per the Interval 1-4 setting.
		1	60i->60i	The interval (execution interval) is set to 1 V.
		2	24p-> 60i 2-3PullDown	The interval (execution interval) is set to 2 V and 3 V, and repeated.
		3	25p->50i	The interval (execution interval) is set to 2 V.
		4	30p->60i	The interval (execution interval) is set to 2 V.
(4)	Interval (Interval 1)	Th	The interval (execution interval) is set here. Setting range: 1 V to 255 V This setting takes effect only when User has been selected as the Mode setting .	
(5)	Step (Step 1)	The amount of movement per interval (execution interval) is set here.		
		Н	H Setting range: 1 dot to 4095 dots This setting takes effect only when Left or Right has been selected as the Direction setting .	
		V	This setting takes effect only when Up or Down has been selected as the Direction setting .	
The fo	ollowing items are selected o			
(6)	Interval 2 to 4		The interval (execution interval) is set here. Setting range: 0 V to 255 V	
		be	When a setting other than "0" has been selected, the conditions which have been set are repeated in sequence starting with Interval 1 . Example: Interval 1 → Interval 2 → Interval 3 → Interval 1 → ••••	
(7)	Step 2 to 4	The amount of movement per interval (execution interval) is set here.		
(,		l	The amount of movement corresponding to the Interval 2-4 setting is set.	
			H Setting range: 0 dot to 4095 dots This setting takes effect only when Left or Right has been selected as the Direction setting.	
		V	Setting range: 0H to 409 This setting takes effect Direction setting .	95H only when Up or Down has been selected as the

7.5 Subtitle scrolling

For details on the action selection procedure, refer to "2.1.4 Selecting the actions."

(1)	Select Program Edit using or or and then press.	MENU Program Edit Program Name : ▶EIA1920x1080Pa60 Timin9 (TIM)
(2)	Select Action (PAT) using or or or and then press.	MENU Action Graphic Plane Character Plane Shindow Subtitle Motion Blur
(3)	Select Subtitle using or or or and then press.	MENU Subtitle Scroll Scroll (0/1): DON CONTROL CONTRO
(4)	Select the items using or image of the press or items using or image of the press or items. Select the parameters using or image or image or image or image or items. Select the parameters using or image or image. Select the parameters using the number keys of image or image.	For details, refer to the <table items="" of="" scroll="" setting="" subtitle="">.</table>

<Table of subtitle scroll setting items>

(1)	Scroll(0/1)	Sc	rolling is set to On or Off	here	
()	GOTOR(G/T)	0	OFF	Scrolling is set to Off.	
		1	ON	Scrolling is set to On.	
(2)	Direction(0-7)		e scrolling direction is set	•	
(2)	Direction(0-7)	0	Left	The subtitles are scrolled to the left.	
		1	Right	The subtitles are scrolled to the right.	
		2	Up	The subtitles are scrolled to the top.	
		3	Down	The subtitles are scrolled to the bottom.	
		4	Left Up	The subtitles are scrolled to the top left.	
		5	Left Down	The subtitles are scrolled to the bottom left.	
		6	Right Up	The subtitles are scrolled to the top right.	
		7	Right Down	The subtitles are scrolled to the bottom right.	
(3)	Mode(0-4)	Th		ution interval) mode is specified here.	
(0)	modo(o 4)	0	User	Scrolling is executed in compliance with the	
		ľ		Interval 1, 2, 3 or 4 setting.	
		1	60i->60i	1V serves as the interval (execution interval).	
		2	24p->60i 2-3PullDown	2V and 3V are repeated as the interval (execution interval).	
		3	25p->50i	2V serves as the interval (execution interval).	
		4	30p->60i	2V serves as the interval (execution interval).	
(4)	Interval(Interval 1)	Th	e interval (execution inter	rval) is set here.	
		Th	Setting range: 1 V to 255 V This item can be set only when User has been selected as the Mode setting. In all other modes, a fixed value is displayed.		
(5)	Step(Step 1)	Th	e amount of movement p	er interval (execution interval) is set here.	
			Direction setting.	nly when Left or Right has been selected as the	
		V	Setting range: 1 H to 40 This item takes effect or Direction setting.	95 H nly when Up or Down has been selected as the	
	ems listed below are set only			<u> </u>	
(6)	Interval 2 - 4	The interval (execution interval) is set here. Setting range: 0 V to 255 V When a setting other than "0" has been set, the set conditions are repeated in sequence starting from Interval 1. Example: Interval 1 → Interval 2 → Interval 3 → Interval 1 →			
(7)	Step 2 - 4			er interval (execution interval) is set here.	
		set	This is the amount of movement (step) which corresponds to the Interval 2-4 settings.		
		H Setting range: 0 dot to 255 dots This item takes effect only when Left or Right has been selected as the Direction setting.			
		V Setting range: 0 H to 255 H This item takes effect only when Up or Down has been selected a Direction setting.			

7.6 0.25- and 0.125-dot scrolling actions (option)

0.25-dot and 0.125-dot scrolling can be set.

This function is optional. (The 0.25 dot and 0.125 dot are separate options.)

For further details, contact your dealer or an ASTRODESIGN sales representative.

Concerning 0.25- and 0.125-dot scrolling


The setting increments used by the regular scrolling function are interval 1 V increments (frames for progressive scanning and fields for interlaced scanning), and 1-dot increments are used for the movement amounts.

In the case of the VG-870B or 871B, smoother scrolling can be achieved by providing four patterns with a 0.25-dot shift in between (or two patterns with a 0.5-dot shift and 8 patterns with a 0.125-dot shift).

<Example>

When scrolling horizontally for one round at a 1920 × 1080p @ 60p timing of approximately 5 seconds About 13 dots are required per 2 V and about 6.5 dots (*1) per 1 V.

*1: Amount of movement per 1 V = 1920/ $(60*5) = 6.4 \approx 6.5$ [dot]

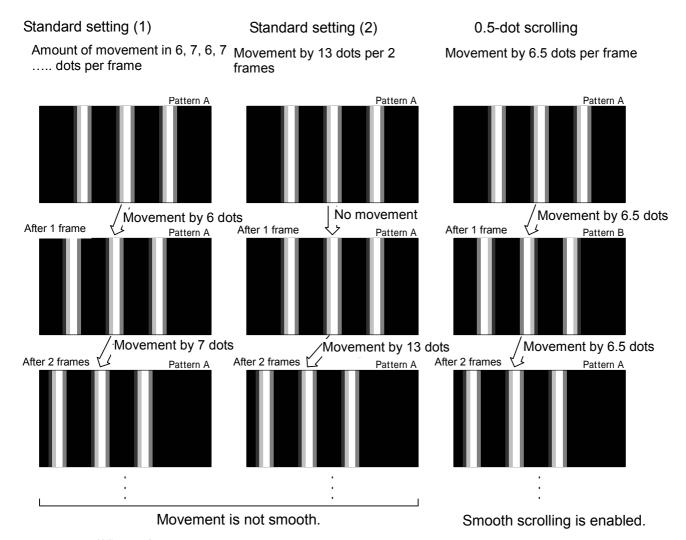

Pattern A: Pattern serving as the reference


Pattern B: Pattern produced when pattern A is moved by 0.5 dot.



The 0.25-/0.125-dot scrolling function takes effect only for the image data created by the user.

With 0.5-dot scrolling


Two patterns, with one offset by 0.5 dot from the other, are created.



Pattern produced when pattern A is moved 0.5 dot to the left.


With 0.25-dot scrolling

Four patterns, each offset by 0.25 dot from the others, are created.

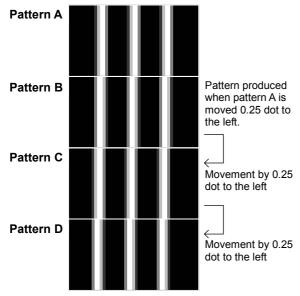

With 0.125-dot scrolling

Eight patterns, with one offset by 0.125 dot from the other, are created.

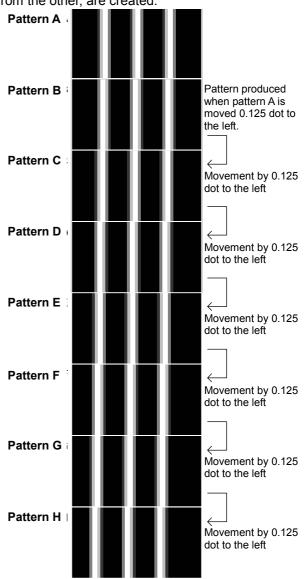

• 0.25-/0.125-dot scrolling settings

For details on the action selection procedure, refer to "2.1.4 Selecting the actions."

(1)	Select Program Edit using SET or set and then press	MENU Pro9ram Edit Pro9ram Name : ▶EIA1920x1080Pa60 Timin9 (TIM)
(2)	Select Action (PAT) using or or or or and then press .	MENU Action Graphic Plane Character Plane Window Subtitle Motion Blur Action
(3)	Select "0.25dot Scroll" or "0.125dot Scroll" using or Dec and then press	MENU
(4)	Select the items using or or or incomplete. Select the items using or incomplete. Select the parameters using or incomplete. Select the parameters using or incomplete. Select the parameters using the number keys or incomplete. Alternatively: Select the parameters using the number keys or incomplete. Select the parameters using the number keys or incomplete.	For further details, refer to Table of 0.25-/0.125-dot scrolling setting items .


<Table of 0.25-dot and 0.125-dot scroll setting items>

(1)	OFF/ON (0/1)	On or Off for 0.25-/0.125-dot scrolling is set here.			
		0	OFF	0.25-/0.125-dot scrolling is set to Off.	
		1	ON	0.25-/0.125-dot scrolling is set to On.	
(2)	Direction (0/1)	Th	The direction of 0.25-/0.125-dot scrolling is set here.		
		0	Left	Scrolling moves to the left.	
		1	Right	Scrolling moves to the right.	
(3)	Step	The amount of movement per 1 V is set here.			
		0.25-dot scroll setting range: 0.00 dot to 254.75 dots (0.25 dot Step)			
		0.125-dot scroll setting range: 0.000 dot to 254.750 dot (0.125 dot Step)			
(4)	V-offset	The value of V-offset is set here.			
		Se	tting range: 0.0 to 100.0%	% (0.1% Step)	

7.7 Motion blur

Motion blur is a function for displaying up to 16 of the specified patterns described later, and moving them.


The patterns to be displayed using this function can be combined with other patterns (excluding the cursor), and displayed.

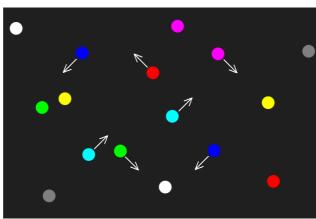

<Display example: Random movement direction>

The setting procedure is described below.

For details on the action selection procedure, refer to "2.1.4 Selecting the actions."

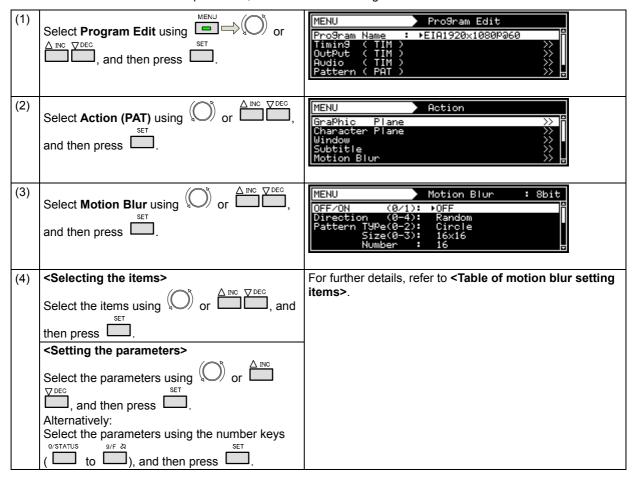

<Table of motion blur setting items>

(1)	OFF/ON (0/1)	Th	This is used to set the motion blur function to ON or OFF.			
,	, ,	0	OFF	OFF		
		1	ON			
(2)	Direction (0-4)	Th	e direction of the pattern	movement is specified here.		
	, ,	0	Top-L<->Bottom-R	Top left ⇔ bottom right		
		1	Left<->Right	Left ⇔ right		
		2	2:Up<->Down	Up ⇔ down		
		3	Random	Random		
		4	Left<->Right Pair	Left ⇔ right pair		
(3)	Pattern Type (0-2)	Th	Pattern 1~ Pair 1 1 2 2 3 4 3 5 6 4 7 8 5 9 10 6 11 12 7 13 14 8 15 16 e shape of the pattern is Circle			
		H.	Square			
		2	USER Character	Square User character		
			OOLIT GHAIACICI	Setting range: E0h - FFh		
(4)	Pattern Size (0-3)	Th	e size of the pattern is sp			
(. /		0	8 × 8	osinou nerer (usi)		
		1	16 × 16			
		2	32 × 32			
		3	64 × 64			
(5)	Pattern Number		e number of patterns to betting range: 1 - 16	e displayed is set here.		
		*	16 is specified as the nu	ight Pair setting is available only when 2, 4, 8, or imber of patterns. Even if a number other than 2, he number of patterns will be 2, 4, 8, or 16.		
(6)	Distance	When the Direction >Left<->Right Pair setting is selected, the pattern interval for each pair is specified here. Setting range: 0 to 255 [dot]				
		Pair 1 Pattern Distance 1				
(7)	Step InpMode (0/1)	Th	e step setting method is			
		0	All	All the patterns are set together.		
		1	Separate	The patterns are set individually.		

(8)	Step (/1 V)	The amount of pattern movement per 1 V (progressive scanning: frame; interlaced scanning: field) is set here. Setting range: 1 - 255 [dot]
		* When the Direction >Left<->Right Pair setting is selected, the amount of movement is specified for each pair (pair 1 to 8).

(9)	Color InpMode (0/1)	The color setting method is specified here.		
		0 AII		All the patterns are set together.
		1 Separate		The patterns are set individually.
(10)	Color	The pattern co	olors (R/G/B le	evels) are set here.
		The colors for	patterns 9 to	16 are the same as for patterns 1 to 8.
		The setting range differs depending on the pattern drawing bit le Depth).		pending on the pattern drawing bit length (Color
		Color Depth	Setting rang	<u>ge</u>
		8bit :	0 - 255	
		9bit : 0 - 511		
		10bit :	0 - 1023	
		11bit: 0 - 2047		
		12bit :	0 - 4095	
		13bit :	0 - 8191	
		14bit :	0 - 16383	
		15bit :	0 - 32767	
		16bit :	0 - 65535	
(11)	OPT Back R,G,B	optional patte	rn No.71 (Mot	/B levels) is specified here when the internal ion Blur Line) has been selected. ne as for the Color setting item .
(12)	Area H/V		novement rang	ge is set as a percentage of H/V-Timing Disp.

<Concerning the internal optional pattern No.71>


Internal optional pattern No.71 (Motion Blur Line) is the pattern which displays the aspects of the Motion Blur>Step setting and other setting items.

What is displayed depends on the Direction setting.

The background color can be set using OPT Back.

- (1) When the Direction>Top-L<->Bottom-R, Left<->Right, or Up<->Down setting is selected
 - The Step and its path line are displayed in white.
- (2) When the Direction>Left<->Right setting is selected

The Step and Distance are displayed in white.

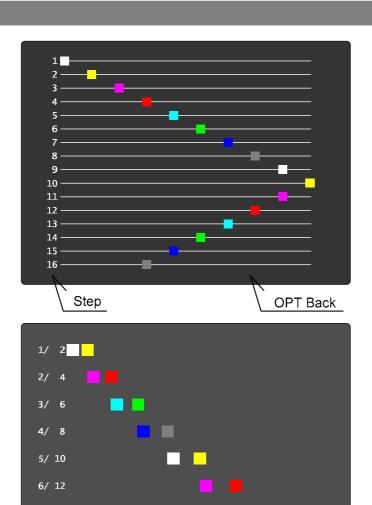

(3) When the Direction>Random setting is selected The frames are displayed in white.

OPT Back

Step / Distance

8/ 16

7.8 Scroll Sequence

Sequence numbers for each plane can set up to 16 by scroll sequence setting.

(1)	Select Program Edit using SET or set of the press	MENU Program Edit Program Name : ►EIA1920x1080Pa60 Timin9 (TIM)
(2)	Select Action using or $\stackrel{\triangle}{\square}$ or $\stackrel{\nabla}{\square}$, and then press $\stackrel{\mathbb{SET}}{\square}$.	MENU Action Motion Blur 0.5/0.25dot Scroll Scroll Sequence Lip Sync Black Insertion
(3)	Select Scroll Sequence using or	MENU Scroll Sequence OFF/ON Graphic (0/1): ▶OFF Character(0/1): OFF Window (0/1): OFF Return Mode (0/1): One Sequence Number : 1
(4)	Select the items using or	For further details, refer to .

<The table of Scroll Sequence setting items>

(1)	OFF/ON (0/1)	O	n or Off is set for graph	nic/character/window plane here.		
		0	OFF	·		
		1	ON			
(2)	Return mode (0/1)	Th	The mode to restore the scroll position is set here.			
		0	One Sequence	Restore per sequence scroll position		
		1	All Sequence	Restore entire sequence scroll positions.		
(3)	Number		Set the number of sequence Setting range: 1-16			
Parar	neter					
(1)	Direction	Th	ne direction of scrolling	g is set here		
		0	L	The window is scrolled toward the left.		
		1	R	The window is scrolled toward the right.		
		2	U	The window is scrolled upward.		
		3	D	The window is scrolled downward.		
		4	L-U	The window is scrolled toward the top left.		
		5	L-D	The window is scrolled toward the bottom left.		
		6	R-U	The window is scrolled toward the top right.		
		7	R-D	The window is scrolled toward the bottom right.		
(2)	Interval		ne interval (execution i etting range: 1 - 255 V			
(3)	H Step	int	The amount of horizontal movement per interval (execution interval)movement is set here. Setting range: 1 - 255 dot			
(4)	V Step	is	The amount of vertical movement per interval (execution interval) movement is set here Setting range: 1 - 255 H			
(5)	Time		ecution time per sequetting range: 1 - 999 V			

7.9 LipSync

For details on the action selection procedure, refer to "2.1.4 Selecting the actions."

The lip sync function can be used to set a difference between the audio phase and video phase.


(1)	Select Program Edit using or or and then press or	Pro9ram Edit Pro9ram Name : ▶EIA1920x1080P@60 Timin9 (TIM)
(2)	Select Action (PAT) using or \triangle or \triangle no \triangle n	MENU Action GraPhic Plane Character Plane Window Subtitle Motion Blur
(3)	Select Lip Sync using or or , and then press.	MENU LiP S9nc OFF/ON (0/1): ▶OFF Mode (8/1): Dela9 Audio Dela9 Time: + Øms ON Time : 120V OFF Time : 120V
(4)	Select the items using or incomplete, and then press . Setting the parameters using or incomplete or incomplete. Select the parameters using or incomplete or incomplete. Select the parameters using the number keys of incomplete or incomplete. Alternatively: Select the parameters using the number keys of incomplete or incomplete.	For further details, refer to <table items="" lip="" of="" setting="" sync="">.</table>

<Table of LipSync setting items>

(1)	OFF/ON(0/1)	Whether to set the lip sync function on or off is set here.				
		0	OFF	Disabled		
		1	ON	Enabled		
(2)	Mode(0/1)	The method used to set the delay amount (time) is set here.				
		0	Delay	The delay amount of the user's choice is set.		
		1	EDID	The delay amount accords with the EDID of the connection destination. (Automatically set)		
(3)	When Delay has been	Th	e delay amount is set he	re as a time.		
	selected as the Mode		NU LiP Sync	•		
	setting Audio Delay Time	Mi	F/ON (0/1): OFF ode (0/1): Delay odio Delay Time: (++) (0ms			
	Addio Delay Tillie	OF OF	Time : 2550 F Time : 1200			
		100				
		Sign Time				
		Sign: Indicates behind or ahead.				
		0	+	The audio is behind the video.		
		<u> </u>		The audio is ahead of the video.		
	W. FDID I	_	ne: The time is set here.	IDID:		
	When EDID has been selected as the Mode		e port used to read the E			
	setting		ncerned.	the amount of delay defined in the EDID		
	EDID Port		ENU Lip	Sync		
		O	FF/ON (0/1): OFF	i i i i i i i i i i i i i i i i i i i		
		M:	o <u>de (0/1): EDI</u> DID Port (0/1): ▶HDM			
		0	N Time : 255 FF Time : 120			
		_				
		0	HDMI1	The EDID is read from HDMI1.		
		1	HDMI2	The EDID is read from HDMI2.		
(4)	On Time	The audio output time and raster (white) display time are set using the vertical sync signal (in 1-frame increments). Setting range: 1 V to 255 V				
(5)	OFF Time	The audio no output time and display OFF (black) time are set using the vertical sync signal (in 1-frame increments). Setting range: 1 V to 255 V				

7.10 Black insertion action

For details on the action selection procedure, refer to "2.1.4 Selecting the actions."

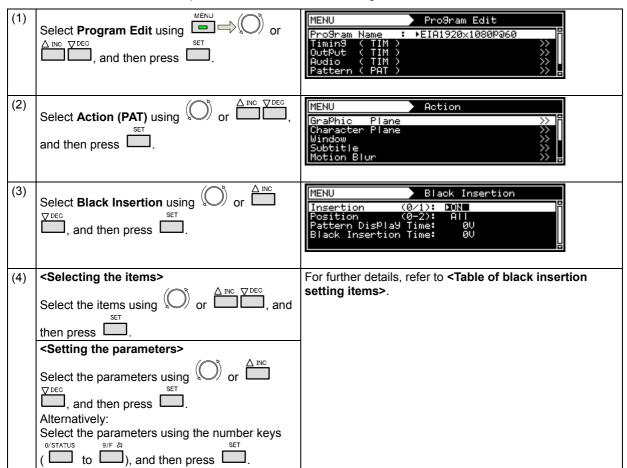

<Table of black insertion setting items>


(1)	Insertion (0/1)	On	or Off for black insertion	is set here.
		0	OFF	Black insertion is set to Off.
		1	ON	Black insertion is set to On.
(2)	Position (0-2)	The black insertion position is set here.		
		0	All	The entire screen is subject to the black insertion.
		1	Left Half	The left half of the screen is subject to the black insertion.
		2	Right Half	The right half of the screen is subject to the black insertion.
(3)	Pattern Display Time	The time during which the pattern is to be displayed is set here. Setting range: 0 V to 255 V		
(4)	Black Insertion Time		e time during which black nge: 0 V to 255 V	s insertion is to take effect is set here. Setting

8

HDCP SETTINGS AND EXECUTION

8.1 HDCP settings

<HDCP setting procedure>

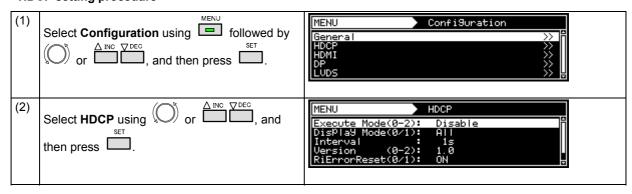

<List of HDCP setting items>

(1)	Execute Mode (0-2)	Th	The HDCP execution mode is set here.		
		0	Disable	HDCP execution is disabled.	
		1	Enable	HDCP execution is enabled.	
		2	Program	HDCP execution enable/disable is set for each	
				program.	
(2)	Display Mode (0-1)	Th	e HDCP authentication s	creen display mode is set here.	
		0	All	All the authentication values are displayed.	
		1	NG Only	The authentication values are displayed only with an NG result.	
(3)	Interval	Th	e interval for performing t	the authentication is set here.	
		1s-	-10s	An interval from 1 second to 10 seconds is set.	
(4) Version (0-2) The HDCP version is set here.			ere.		
		0	1.0	HDCP version 1.0 is used for execution.	
		1	1.1/1.2	Operation is performed using HDCP version 1.1 or 1.2. *1	
		2	EDID Check	The version is determined after checking EDID.	
(5)	RiErrorReset (0/1)		nether to proceed with re- OCP authentication is set	-authentication when errors have occurred in here.	
		0	OFF	Re-authentication is not undertaken when errors have occurred.	
		1	ON	Re-authentication is undertaken when errors have occurred.	
(6)	FIFO Ready (0-8)	The limit on the time to wait until "FIFO Ready" is returned when the connected device is a repeater is set here.			
		0	OFF	30 seconds	
		1- 7	600 ms to 4,200 ms	Increased in increments of 600 ms	
		8	5,000 ms	5 seconds	

^{*1 &}quot;Advance Cipher/Enhanced Link Verification" is not supported.

8.2 HDCP execution

8.2.1 Execution procedure

One of the following three steps can be taken for HDCP execution.

- a) Set enable or disable using the On/Off customize key.
- b) Set enable or disable using Configuration.
- c) Set enable or disable for each program.

a) Setting enable or disable using the On/Off customize key

This setting is canceled when the program is changed, and b) Setting enable or disable always using Configuration and c) Setting enable or disable for each program take effect.

(1)	I HDCP	HDCP is executed, and the authentication results screen
		appears above the test pattern.

b) Setting enable or disable using Configuration

(1)	Select Configuration using followed by or followed by and then press.	Ge H Di	eneral OCP OMI ODS	Configuration >>> >>> >>> >>> >>> >>> >>> >>> >>>
(2)	Select HDCP using or or or , and then press.	E) Di Ir Us	NU «ecute Mode(0-2 isPlay Mode(0/1 iterval ersion (0-2 iErrorReset(0/1): A : 1s): 1.0
(3)	∆ INC	Th	e HDCP executi	on mode is set here.
	Select Execute Mode using or or	0	Disable	HDCP execution is disabled.
	and then press.	1	Enable	HDCP execution is enabled.
	,	2	Program	HDCP execution enable/disable is set for each program.

c) Setting enable or disable for each program

This setting takes effect when "Program" was selected as the HDCP mode setting in b) Setting enable or disable using Configuration.

(1)	Select Program Edit using or or \triangle INC \bigcirc DEC, and then press.	Pr Ti	ENU roSram Name iminS (TIM) utPut (TIM) udio (TIM) attern (PAT)	Pro9ram Edit ►EIA1920×1080Pa60 >>> >>> >>> >>> >>>
(2)	Select Output (TIM) using or or or or and then press.	а А О	ENU OutPut nalo9 OutPut 9ita OutPut 8I Function	OutPut
(3)	Select All Output using or or or and then press .	0.0	ENU JtPut OFF/ON Jnc OCP EVel Mode SPect Mode (0-4	All OutPut >>> >>> >>> >>> >>> >>> >>> >>> >>>
(4)	Select HDCP using or $\stackrel{\triangle \text{INC}}{\longleftarrow}$ or $\stackrel{\nabla \text{DEC}}{\longleftarrow}$, and then press $\stackrel{\text{SET}}{\longrightarrow}$.		ENU «ecute Enable(@ isPlay Select(@	→ HDCP 3/1): ►Disable 3-7): HDMI1
(5)	Select the items using \bigcirc or $\stackrel{\triangle \text{INC}}{\longleftarrow}$, and then press $\stackrel{\text{SET}}{\longrightarrow}$.	Th It c	covers all the vid	o/1) er HDCP is to be executed. eo interfaces capable of executing ecuted at the same time.
		0	Disable	HDCP is not executed.
		1	Enable	HDCP is executed.
	Inputting the parameters>	au		4) This item allows the HDCP us to be displayed for one video interface
	Select the parameters using O or	0	Disable	The status is not displayed.
	DEC , and then press .	1	HDMI1	The status of HDMI unit channel 1 is displayed.
	Alternatively: Select the parameters using the number keys O'STATUS 9/F & SET	2	HDMI2	The status of HDMI unit channel 2 is displayed.
	(to), and then press .	3	DP1	The status of DP unit channel 1 is displayed.
		4	DP2	The status of DP unit channel 2 is displayed.
		5	DVI2	The status of DVI unit channel 2 is displayed.
		6	PC-DVI	The status of PC unit DVI is displayed.
		7	TV-DVI	The status of TV unit DVI is displayed.

8.2.2 Screen displays during HDCP execution


The authentication results and other information are displayed on the screen during HDCP execution. (If other patterns are already displayed, the information will be displayed on top of the patterns.)

(1) When HDCP is selected as the NAME/LIST pattern.

For details on the screen and what is displayed on the screen, refer to "6.13.5 HDCP (High-bandwidth Digital Content Protection)."

(2) At all other times

A screen such as the one shown below is displayed.

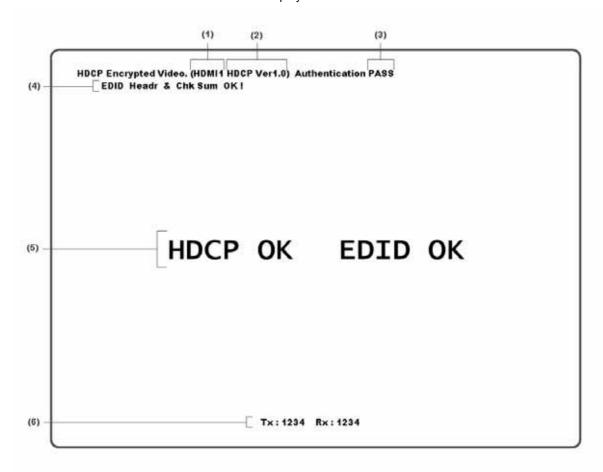

Details of the information shown on the screen are given below.

<HDCP authentication screen (simplified version) display data>

(1)	This indicates the port selected in c) Display Select of "8.2.1 Execution procedure."
(2)	The HDCP version is displayed here. (When the HDCP authentication has failed, an error message is displayed.)
(3)	The HDCP authentication results are displayed here. (If authentication is successful, "PASS" appears; it is has failed, "NG" appears.)
(4)	The check results for the EDID header and checksum are indicated here. (These results are displayed only when "AUTO" has been selected as the HDMI or DVI setting in "4.2.2 HDMI setting procedure" or when "EDID Check" has been selected as the Version setting in "8.1 HDCP settings.")
(5)	The HDCP authentication status (OK or NG) as well as the check result (OK or NG) for the EDID header and checksum are indicated here. (These results are displayed only when "AUTO" has been selected as the HDMI or DVI setting in "4.2.2 HDMI setting procedure" or when "EDID Check" has been selected as the Version setting in "8.1 HDCP settings.")
(6)	The Synchronization Verification Values for checking the adequacy of the link are displayed here. "Tx" is the value calculated for the transmitter; "Rx" is the value calculated for the receiver. The display is updated each time HDCP authentication and encryption are completed. * When the HDCP display is DisplayPort, this item is not displayed.



VG-870B/871B SYSTEM SETTIGS

9.1 System settings

9.1.1 Beep setting


The buzzer which sounds when any of the keys on the front panel of the VG-870B (or on the RB-1870 or RB-1871) are pressed can be turned on or off.

(1)	Select Configuration using or or \triangle INC \bigcirc DEC and then press .	GHID	eneral DCP DMI DJDS	Configuration >>> >> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >> >> >>> >>> >>> >>> >>> >>> >>> >>> >>> >>> >> >> >
(2)	Select General using or or or and then press.	BE KE L	ENU eep 29 Lock 5-232C 3N 4C/DEC Continui	General (0/1): ▶ON (0-2): UnLock >> t9(0/1): ON
	Select Beep using or or been, and then press. Inputting the parameters	11222	ENU BeP SY Lock 5-232C AN MC/DEC Continui nether the buzze	General (0/1): FOFF (0-2): UnLock ty(0/1): ON r is to beep is set here.
	Select the parameters using or or or or		OFF	The buzzer is turned off.
	→ DEC , and then press Alternatively: Select the parameters using the number keys O/STATUS (1	ON	The buzzer is turned on.


9.1.2 Key lock setting

The keys on the VG-870B/871B main unit can be locked.

<Key lock setting>

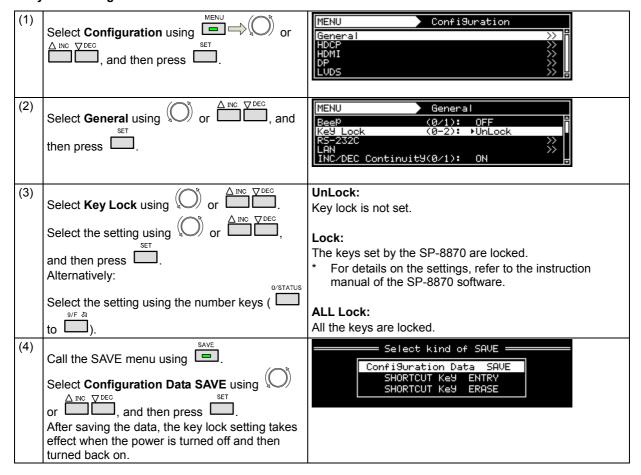

<Key lock release and unlock settings>

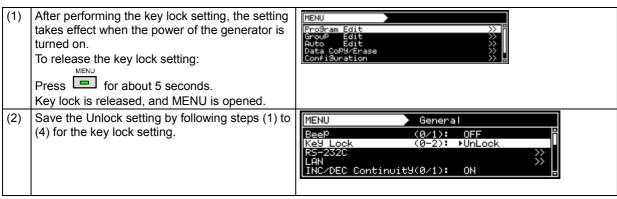

* Unless the Unlock setting is saved, the key lock setting will take effect when the generator is turned on.

9.1.3 RS-232C settings

These settings are performed when connection to the terminal is to established from the RS-232C port.

(1)	Select Configuration using SET or and then press .	Ge HI HI Di	ENU eneral OCP OMI OUDS	Configuration >>> >>> >>> >>> >>> >>> >>> >>> >>>
(2)	Select General using or or or or and then press.	B K K K	ENU 20P 28 Lock 5-232C 3N 4C/DEC Continui	General (0/1): ▶0N (0-2): UnLock
(3)	Select RS232C using or or or then press.	Ba Da Pa	ENU aud Rate (0-3 ata Bits (0/1 arity (0-2 toP Bits (0/1	
(4)	<pre><inputting parameters="" the=""></inputting></pre>	Th	e baud rate is se	et here.
	Select the parameters using $^{\Diamond}$ or $^{\Box}$	0	9600	The baud rate is set to 9600 bps.
	Select the parameters using or or	1	19200	The baud rate is set to 19200 bps.
	<u> </u>	2	19200 38400	The baud rate is set to 19200 bps. The baud rate is set to 38400 bps.
	Alternatively:			•
	Alternatively: Select the parameters using the number keys	2	38400 57600	The baud rate is set to 38400 bps.
	Alternatively: Select the parameters using the number keys O/STATUS 9/F & SET .	2	38400 57600	The baud rate is set to 38400 bps. The baud rate is set to 57600 bps.
	Alternatively: Select the parameters using the number keys	2 3 Th 0	38400 57600 e number of data 7 bit 8 bit	The baud rate is set to 38400 bps. The baud rate is set to 57600 bps. a bits is set here. 7 data bits are set 8 data bits are set
	Alternatively: Select the parameters using the number keys O/STATUS 9/F & SET .	2 3 Th 0 1 Th	38400 57600 e number of data 7 bit 8 bit e parity is set he	The baud rate is set to 38400 bps. The baud rate is set to 57600 bps. a bits is set here. 7 data bits are set 8 data bits are set ere.
	Alternatively: Select the parameters using the number keys O/STATUS 9/F & SET .	2 3 Th 0 1 Th	38400 57600 e number of data 7 bit 8 bit e parity is set he None	The baud rate is set to 38400 bps. The baud rate is set to 57600 bps. a bits is set here. 7 data bits are set 8 data bits are set re. Parity is set to none.
	Alternatively: Select the parameters using the number keys O/STATUS 9/F & SET .	2 3 Th 0 1 Th 0	38400 57600 e number of data 7 bit 8 bit e parity is set he None Even	The baud rate is set to 38400 bps. The baud rate is set to 57600 bps. a bits is set here. 7 data bits are set 8 data bits are set ere. Parity is set to none. Parity is set to even.
	Alternatively: Select the parameters using the number keys O/STATUS 9/F & SET .	2 3 Th 0 1 Th 0 1	38400 57600 e number of data 7 bit 8 bit e parity is set he None Even	The baud rate is set to 38400 bps. The baud rate is set to 57600 bps. a bits is set here. 7 data bits are set 8 data bits are set re. Parity is set to none. Parity is set to even. Parity is set to odd.
	Alternatively: Select the parameters using the number keys O/STATUS 9/F & SET .	2 3 Th 0 1 Th 0 1 2 Th	38400 57600 e number of data 7 bit 8 bit e parity is set he None Even Odd e number of stop	The baud rate is set to 38400 bps. The baud rate is set to 57600 bps. a bits is set here. 7 data bits are set 8 data bits are set re. Parity is set to none. Parity is set to even. Parity is set to odd. b bits is set here.
	Alternatively: Select the parameters using the number keys O/STATUS 9/F & SET .	2 3 Th 0 1 Th 0 1	38400 57600 e number of data 7 bit 8 bit e parity is set he None Even	The baud rate is set to 38400 bps. The baud rate is set to 57600 bps. a bits is set here. 7 data bits are set 8 data bits are set re. Parity is set to none. Parity is set to even. Parity is set to odd.


9.1.4 LAN settings

These settings are performed when connection to the terminal is to established from the LAN port.

(1)	Select Configuration using or or \triangle inc ∇ DEC, and then press.	MENU General HDCP HDMI DP LUDS	Configuration
(2)	Select General using or or or and then press.	MENU BeeP KeY Lock RS-232C LAN INC/DEC Continui	General (0/1): ▶ON (0-2): UnLock >>> it9(0/1): ON
(3)	Select LAN using \bigcirc or $\stackrel{\triangle \text{INC}}{ } \bigcirc$ and then press $\stackrel{\text{SET}}{ }$.	MENU IP SUBNETMASK GATEWAY Port No.	LAN : ▶192, 168, 122, 56 : 255, 255, 255, 0 : 192, 168, 122, 1 : 8000
(4)	<pre><inputting parameters="" the=""></inputting></pre>	The IP is set here.	
	Select the parameters using \bigcirc or \bigcirc or \bigcirc	XXX.XXX.XXX	Set the IP address. The factory setting is 192.168.0.2.
	and then press.	The SUBNETMAS	K is set here.
	Alternatively: Select the parameters using the number keys	XXX.XXX.XXX	Set the subnetmask address. The factory setting is 255. 255. 255.0.
	0/STATUS 9/F ऄ SET	The GATEWAY is set here.	
	(L to L), and then press L.	xxx.xxx.xxx	Set the gateway address. The factory setting is 192. 168. 122.1.
		The Port No. is set	here.
		xxxx	Set the number of the port to be used by the terminal commands. The factory setting is 8000.


9.1.5 INC/DEC continuity setting

The INC/DEC key continuity function enables the holding down of the INC and DEC keys to be enabled or disabled. It works only when programs are selected and executed.

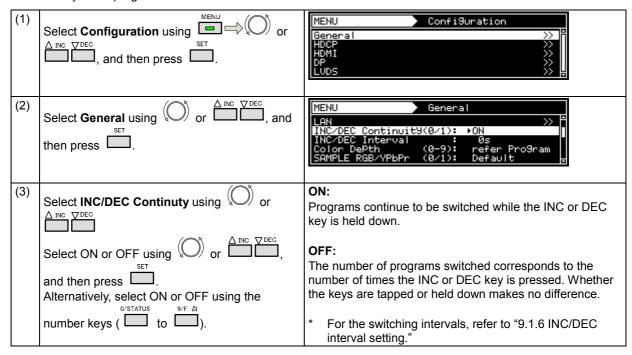

9.1.6 INC/DEC interval setting

This function enables the minimum interval for switching programs to be set using the INC and DEC key. It works only when programs are selected and executed.

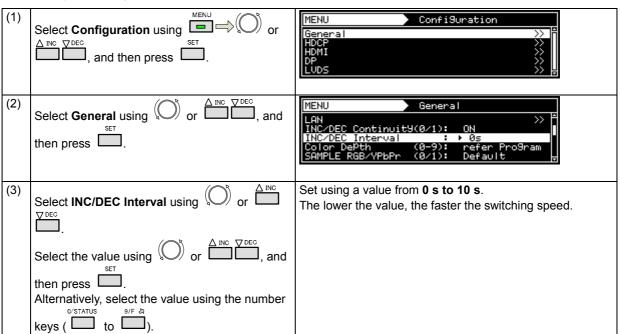


9.1.7 Color depth setting

This setting makes it possible to specify whether the number of color gray scale bits for the output images is to accord with the program data or whether it is to be fixed.

For details, refer to "4.1.5 Setting the bit length (gray scale) for pattern drawing."

9.1.8 SAMPLE RGB/YPbPr setting

This setting makes it possible to specify whether the color space of the output images is to accord with the sample program data or whether it is to be fixed to RGB.

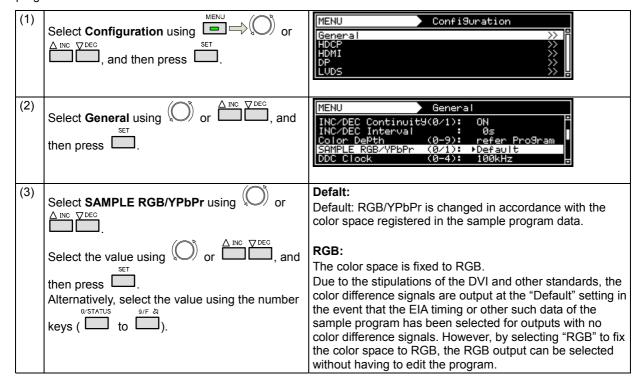

9.1.9 DDC clock setting

The DDC clock can be set.

(1)	Select Configuration using SET or and then press .	MENU Configuration General SON
(2)	Select General using or or discounting, and then press.	MENU General
(3)	Select DDC Clock using or	Select 20, 40, 60, 80 or 100 kHz. The factory setting is 100 kHz.

9.1.10 Trigger mode settings

Concerning the trigger function


The trigger function outputs trigger in accordance with the patterns in order to evaluate the moving picture response speed and other factors.

The following kinds of triggers are provided.

- (1) Window triggers (TriggerA/TriggerB)
- (2) VSync trigger
- (3) Scroll triggers (optional)
- (4) Simple moving image frame trigger (optional)


(1) Window triggers (TriggerA/TriggerB)

When, on the window patterns, 4 or 16 levels are set and displayed for the format, these triggers are output in accordance with the level sequence.

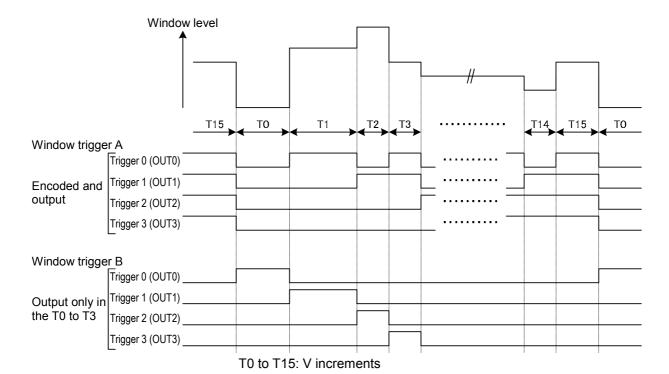

(2) VSync trigger


High and low levels are output alternately in line with VSync.



(3) Scroll triggers (optional)

When a pattern is being scrolled, the trigger is output when the pattern has reached the start position.

When scrolling toward the left

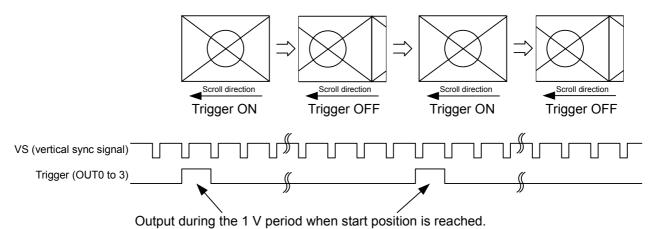




- When there is a multiple number of scroll ON planes (graphic, character and window planes), trigger ON is not output when the scroll settings (step and direction) differ.
- When there is one scroll ON plane, the trigger ON is output in accordance with the settings of that plane.
- Trigger ON can be output with both horizontal direction (left/right) scrolling and vertical direction (up/down) scrolling, but when scrolling in both of these directions (top right, for instance), it is output in accordance with the horizontal direction.


(4) Simple moving image frame trigger (optional)

The trigger is output at the specified frames while simple moving images are displayed.

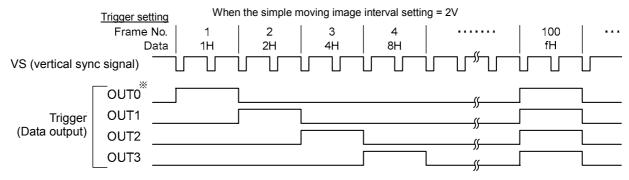

^{*} The VSync trigger is output for OUT0 when Frame + VSync Trigger has been set as the mode.

<Setting procedure>

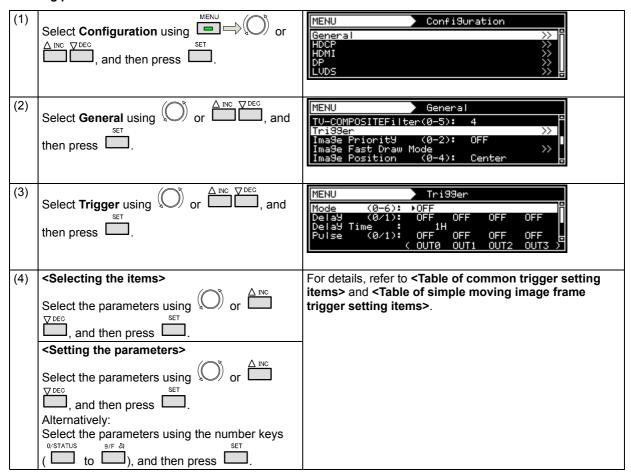

<Table of common trigger setting items>

Mode (0-6)	The trigger functions are selected here. * Frame Trigger, Frame+VSync Trigger and Scroll Trigger are optional functions. For further details, contact your dealer or an ASTRODESIGN sales representative.				
	0	OFF	At this setting, the trigger output is set to OFF.		
	1	TriggerA	Window trigger A is output. The trigger is encoded in line with the set time, and output.		
	2	TriggerB	Window trigger B is output. The trigger is output in line with the set time only for the T0-T3 duration.		
	3	VSync Trigger	The VSync trigger is output. The trigger is encoded in line with the VSync signal, and output.		
	4	Frame Trigger *	The simple moving image frame triggers are output. The triggers are output at the specified frames.		
	5	Frame+VSync Trigger *	The simple moving image frame triggers (OUT1-3) and VSync trigger (OUT0) are output.		
	6	Scroll Trigger *	The scroll trigger is output. The trigger is output in line with the scroll setting.		

I selected for each output (OUT0-3).			Delay OFF	
	0	OFF	The triggers are not delayed.	
	1	ON	The trigger outputs are delayed in accordance with the Delay Time .	ON
Delay Time	The delay time is set here. Setting range: 1 to 4096 [H]			<u>Delay Time</u>
Pulse (0/1) ON or OFF for the pulse function is selected for each output (OUT0-3).			Pulse OFF	
	0	OFF	The triggers are output using a width in V increments. (Refer to "Concerning the trigger function" described previously.)	ON Triggers other than VSync trigger VSync trigger *
	1	ON	The triggers are output using the designated width (in H increments) of the Pulse Width .	Pulse Width * When the pulse function is OFF high level and
Pulse Width	The pulse width is set here. Setting range: 0 to 255 [H]			* When the pulse function is OFF, high-level and low-level VSync triggers are output alternately in line with VSync; when it is ON, they are output with each VSync signal.
Polarity (0/1)	The polarity of the trigger output is selected for			or each output (OUT0-3).
	0	Nega	Reversed	
	1	Posi	Positive (high)	<u> </u>

<Table of simple moving image frame trigger setting items>

* The simple moving image frame trigger is an option so it will not be displayed unless the license has been registered.

Number Of Frames	mber Of Frames The number of frames for outputting the trigger is set here. Setting range: 0 to 16	
Frame No.	The numbers of the frames (max. 16) for outputting the trigger are set here. Any number which exceeds the number of simple moving image being displayed will be ignored. Setting range: 1 to 1024	
Data	The data to be output to the specified frames is set here. (Data bits 0-3: OUT0-3) Setting range: 0x0 to 0xF	


9.1.11 Image - priority settings

Image priority settings can be performed.

Data can be saved both in the internal memory of the VG-870B/871B or on CF cards.

This setting is used to set the priority when both sets of image data have been made valid.


Utilizing it brings some advantages such as increasing the drawing speed and dispersing the data to the internal memory and CF card and then calling the saved data.

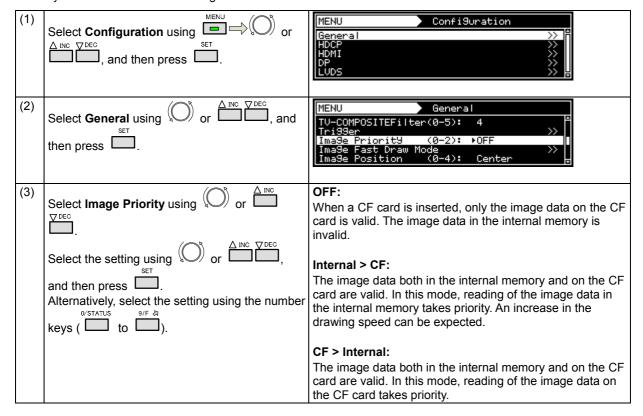

9.1.12 Image Position Setting

Image Position setting can change Bitmap's display position.

* Bitmap resolution can be set only when its resolution is lower than display resolution.

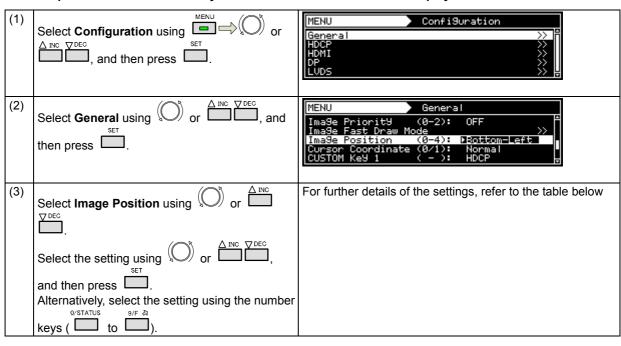

Key	LCD display	Description
0	Center	The image is displayed at the center of the screen.
1	Top-Left	The image is displayed at the top left.of the screen
2	Bottom-Left	The image is displayed at the bottom left.of the screen
3	Top-Right	The image is displayed at the top right of the screen
4	Bottom-Right	The image is displayed at the bottom right.of the screen

9.1.13 Cursor coordinate setting

The position for displaying the cursor coordinates can be set.

For details on the On or Off setting procedure for the coordinate display, refer to "6.12.1 Cursor settings."

(1)	Select Configuration using or or and then press.	MENU Configuration General SYMPHOTE SY
(2)	Select General using or or discounting, and then press.	MENU General Image Priority (0-2): OFF Image Fast Draw Mode >> Image Position (0-4): Center Cursor Coordinate (0/1): ►Normal Mouse SPeed : 1
(3)	Select Cursor Coordinate using or or Select the setting using or	For details on the settings, refer to the table below.

	Key	LCD display	Description
0		Normal	The coordinates are displayed at the top left or top right of the display.
Γ	1	Move with Curs	The display appears near the actual cursor coordinates and moves as the cursor moves.

9.1.14 Mouse speed setting

The movement speed at which to move the cursor using the USB mouse can be set.


For details on the On or Off setting procedure for the coordinate display, refer to "6.12.1 Cursor settings."

(1)	Select Configuration using or or set and then press.	MENU Configuration General SON
(2)	Select General using or or or and then press.	MENU General Image Priority (0-2): OFF Image Fast Draw Mode >> Image Position (0-4): Center Cursor Coordinate (0/1): Normal Mouse SPeed : ▶1
(3)	Select Mouse Speed using or or Select the setting using or or or Select the setting using or	Setting range: 0 (fastest) to 9 (slowest) The factory speed setting is "1."

9.1.15 High-speed drawing mode setting

This function allows high-speed drawing to be set.

With the VG-870B/871B, the high-speed drawing mode in which the specified patterns are selected at high speed can be executed.

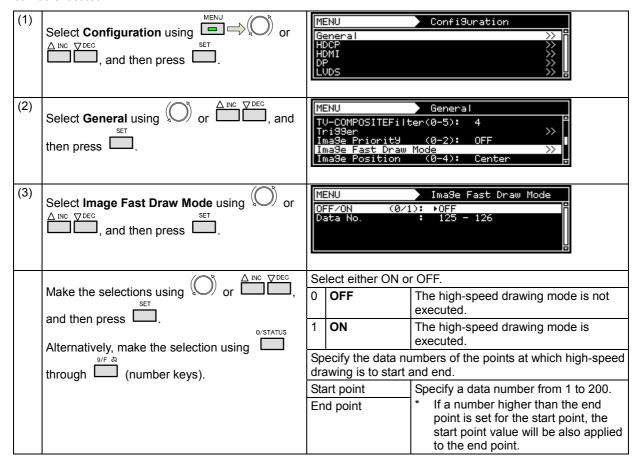



- Video memory capacity restrictions
- The total volume of data which can be developed in the high-speed pattern selection mode in the image files of the video memory is approximately 174 MB although this figure differs slightly depending on the image data size and other factors. In the high-speed pattern selection mode, it is not possible to load image data exceeding this total.
- When the CF card has been ejected
 When the high-speed pattern selection mode has been set to ON and image
 data has been developed from the card into the video memory, all the image
 data developed from the CF card will be cleared if the card is ejected.

9.1.16 CUUSTOM Key1, 2, RB-1871 CUSTOM Key


Custom Key2/RB-1871CustomKey2

Either MUTE or HDMI AV-MUTE can be selected.

(1)	Select Configuration using or or \triangle inc \bigcirc pec and then press .	MENU Configuration General SOFTH SO
(2)	Select General using or $\stackrel{\triangle \text{INC}}{\longrightarrow} \stackrel{\nabla \text{DEC}}{\longrightarrow}$, and then press $\stackrel{\text{SET}}{\longrightarrow}$.	MENU General CUSTOM Key 1 (-): HDCP 2 (0/1): → HDMI AV-MUTE RB-1871CUSTOMKEY 1(-): HDCP 2(0/1): HDMI AV-MUTE Power-On Pro9ram >> T
(3)	Select CUSTOM Key2 or RB-1871 CUSTOM	MUTE:
	Key 2 using O or ☐ ☐ ☐ .	This operates as the audio mute.
	NC DEC	HDMI AV-MUTE:
	Make the selections using or	This operates as the HDMI Av-Mute.
	and then press	It is set to Off when the program is switched.
	Alternatively, make the selection using	* When the setting is changed, MUTE or HDMI AV-MUTE is set to Off.
	through (number keys).	

9.1.17 Operation mode at power-on

The program to be executed immediately after turning on the power of the VG-870B or 871B can be set.

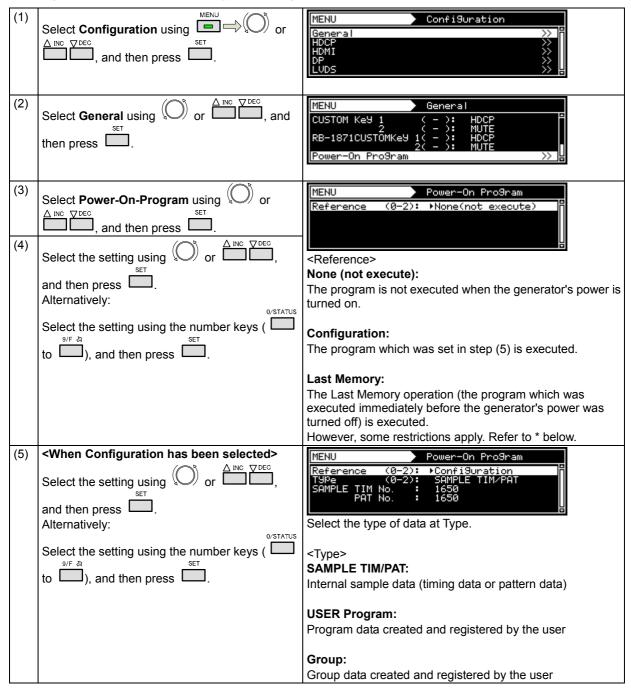

* Last Memory restrictions

- 1. The user program will be executed in cases where the data types differ such as when internal sample data is selected as the timing data and a user program is selected as the pattern data. (Example: When TIM=1001 and PAT=1, TIM=PAT=1 is executed.)
- 2. The timing data number will be executed in cases where user programs are selected as both the timing data and pattern data but their numbers differs. (Example: When TIM=5 and PAT=1, TIM=PAT=5 is executed.)
- 3. When Last Memory is executed using a group, the data at the head of the group will be executed.

10

OTHER FUNCTIONS

10.1 Copying and erasing data

The data stored on the media (internal memory or CF cards) can be copied or erased.



Refrain from ejecting the CF card or turning off the power while data is being copied or erased.

Otherwise the CF card and its data may be damaged.

10.1.1 Copying programs

Various methods can be used to copy the program data.

(1)	Select Data Copy/Erase using SET or SET, and then press .	MENU Program Edi Group Edi Auto Edi Data Copy/E Configurati	t >> t >> rase >>
(2)	Select Copy: Program using or	MENU COPY : Pros COPY : USER COPY : USER COPY : Imas COPY : Subt	Character >> • OPT Pattern >>
(3)	Select the programs using or	MENU TYPe (0-4 Source Destination	: 1 > CF-Card
(3)	Select the programs using or and then press. Alternatively: Select the programs using the number keys	Type (0-4 Source Destination	Select the type of data copying to be used here.
(3)	Select the programs using or and then press. Alternatively: Select the programs using the number keys O'STATUS 9/F & SET	Type (0-4 Source Destination Type: Source:	Select the type of data copying to be used

<Pre><Pre>rogram categories for Type>

1-Program:

Select this when copying stored programs in their original form.

1-SAMPLE TIM&PAT->Program:

When combining the timing data and pattern data among the internal sample data to create a program

1-TIM (Timing/Output/Audio):

When the timing data of the source program is to be combined with the pattern data of the destination program and the existing program is to be overwritten by the program thus created

* This setting cannot be used when the program does not exist at the destination end.

1-PAT (Pattern/Action):

When the pattern data of the source program is to be combined with the timing data of the destination program and the existing program is to be overwritten by the program thus created

 This setting cannot be used when the program does not exist at the destination end.

Multiple-Program:

Select this when copying a multiple number of programs.

<Differences in the settings from one type of data to another>

1-Program

Select the source and destination program numbers and the media.

1-SAMPLE TIM&PAT->Program

Select the timing or pattern data number among the internal sample data to serve as the source, and select the program number and media to serve as the destination.

1-TIM(Timing/Output/Audio)

Select the program number and media for the timing data to be used as the source, and select the program number and media for the pattern data to be used as the destination.

1-PAT(Pattern/Action)

Select the program number and media for the pattern data to be used as the source, and select the program number and media for the timing data to be used as the destination.

1-Multiple-Program

Select the range of the source and destination program numbers and the media.



10.1.2 Copying user characters

User character pattern data can be copied.

(1)	Select Data Copy/Erase using SET or Set and then press .	MENU Program Edit Group Edit Auto Edit Data Copy/Erase Configuration MENU >> Configuration >> Configuration
(2)	Select COPY: USER Character using or or and then press.	MENU Data CoPY/Erase COPY : Program COPY : USER Character COPY : USER OPT Pattern COPY : Image COPY : Subtitle >> COPY : Subtitle
(3)	Select the characters using or	MENU USER Character CoPY Source: ▶eØH > CF-Card Destination: ■ØH > Internal ▶ EXECUTE < Select the copy source character code (such as e0H) and the media. Destination: Select the copy destination character code (such as e0H) and the media.
(4)	Select EXECUTE using or	MENU USER Character CoP9 Source : e8H > CF-Card Destination : ecH > Internal > EXECUTE <

10.1.3 Copying user optional patterns

User optional pattern data can be copied.

(1)	Select Data Copy/Erase using or Dec and then press .	MENU Program Edit Group Edit Auto Edit Data CoP9/Erase Configuration MENU >> 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
(2)	Select COPY: USER OPT Pattern using or hand then press hand.	MENU Data CoPY/Erase COPY : Program
(3)	Select the patterns using or	MENU Source: ► 1 (001H) > CF-Card Destination: 1 (001H) > Internal EXECUTE < Source: Select the copy source pattern number and the media. Destination: Select the copy destination pattern number and the media.
(4)	Select EXECUTE using or $\bigcap_{SET}^{\Delta INC} \bigcap_{T}^{DEC}$, and then press \bigcap_{SET} to complete the copying.	MENU USER OPT Pattern CoPY Source : 25 (019H) > CF-Card Destination : 150 (096H) > Internal > EXECUTE <


10.1.4 Copying images

Image pattern data can be copied.

(1)	Select Data Copy/Erase using SET or SET, and then press .	MENU Pro9ram Edit Group Edit Auto Edit Data CoP9/Erase Configuration MENU Pro9ram Edit State of the state
(2)	Select COPY: Image using or or or or and then press .	MENU Data CoPY/Erase COPY : Pro9ram COPY : USER Character
(3)	Select the images using or	MENU Image Copy
(4)	Select EXECUTE using or	MENU Image Copy Source: 15(00fH) > CF-Card Destination: 3(003H) > Internal > EXECUTE <

10.1.5 Copying subtitle

Subtitle pattern data can be copied.

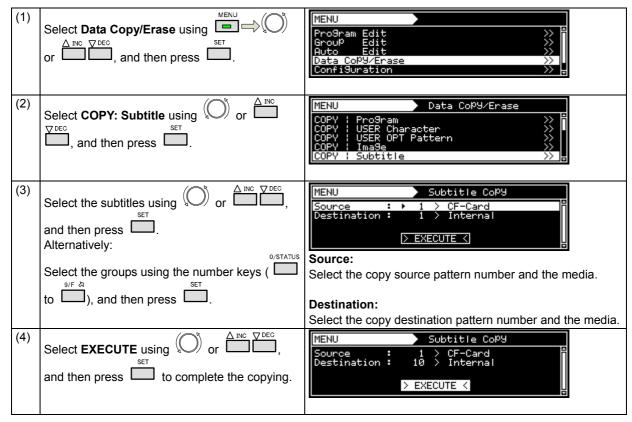

10.1.6 Copying groups

Group data can be copied.

(1)	Select Data Copy/Erase using SET or SET and then press .	MENU Pro9ram Edit Group Edit Auto Edit Data CoP9/Erase Configuration MENU Pro9ram Edit State of the state
(2)	Select COPY: Group using or or or and then press or and then press or	MENU Data CoPY/Erase COPY : USER Character
(3)	Select the groups using or	MENU Group Copy Source: ▶ 1 > CF-Card Destination: 1 > Internal ▶ EXECUTE ⟨ Select the copy source group number and the media. Destination: Select the copy destination group number and the media.
(4)	Select EXECUTE using or	MENU Group Copy Source : 9 > CF-Card Destination : 1 > Internal > EXECUTE <

10.1.7 Copying auto executions


Auto execution data can be copied.

(1)	Select Data Copy/Erase using or Dec and then press .	MENU Program Edit Group Edit Auto Edit Data CoP9/Erase Configuration MENU >> 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
(2)	Select COPY: Auto using or	MENU Data CoPY/Erase COPY : USER OPT Pattern
(3)	Select the auto executions using or	MENU Auto Copy Source (0/1):
		Destination: Display the copy destination media. (When Source is selected,the media is selected automatically.)
(4)	Select EXECUTE using or	MENU Auto Copy Source (0/1): Internal Destination: CF-Card > EXECUTE <

10.1.8 Copying all data

All the data can be copied together.

The time taken to copy the data differs according to how much data is to be copied. It is not possible to cancel copying once it has been initiated.

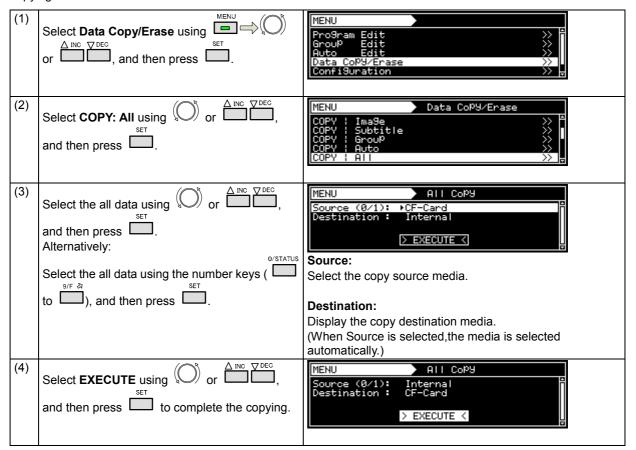




Refrain from ejecting the CF card or turning off the power while data is being copied.

Otherwise the CF card and its data may be damaged.


10.1.9 Erasing programs

Program data can be erased. At the same time, multiple numbers of programs can be erased.

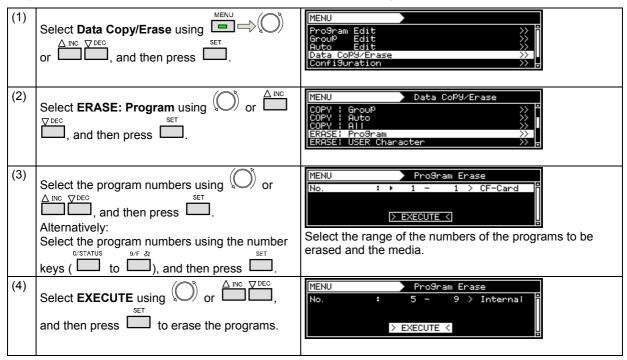


10.1.10 Erasing user characters

User character pattern data can be erased.

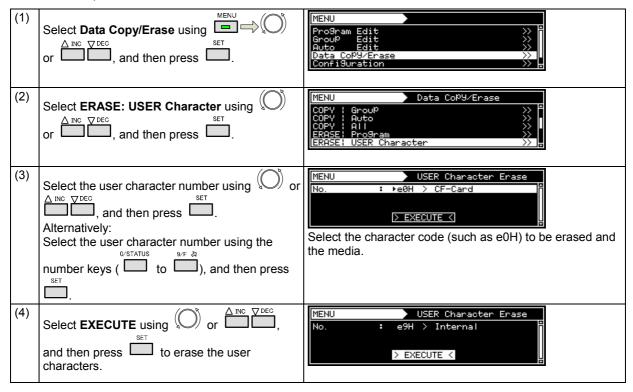


10.1.11 Erasing user optional patterns

User optional pattern data can be erased.

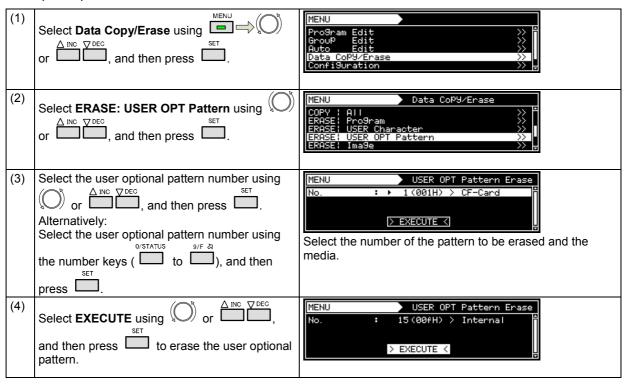


10.1.12 Erasing images

Image pattern data can be erased.

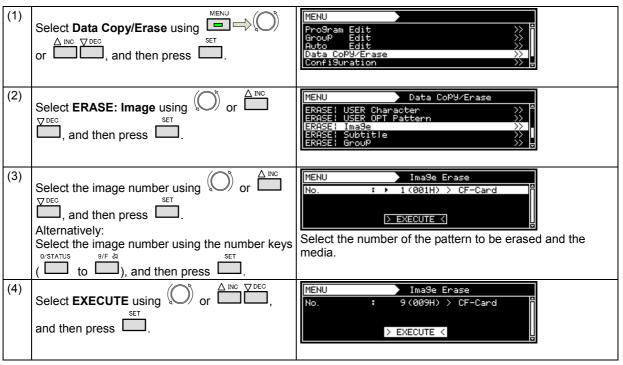


10.1.13 Erasing subtitle

Subtitle pattern data can be erased. At the same time, multiple numbers of programs can be erased.

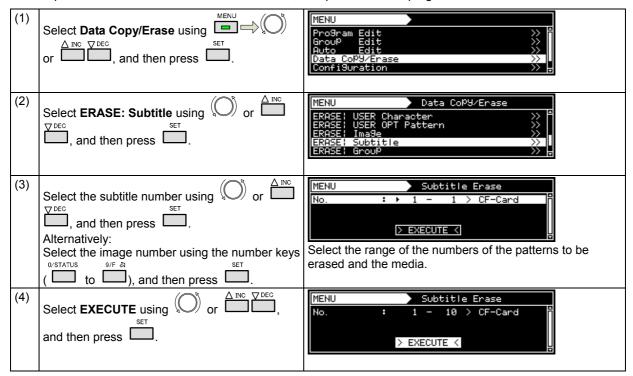


10.1.14 Erasing groups

Group pattern data can be erased. At the same time, multiple numbers of programs can be erased.

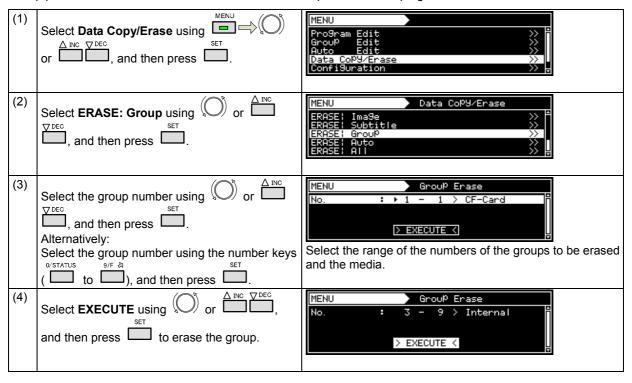


10.1.15 Erasing automatic executions

Automatic execution data can be erased.

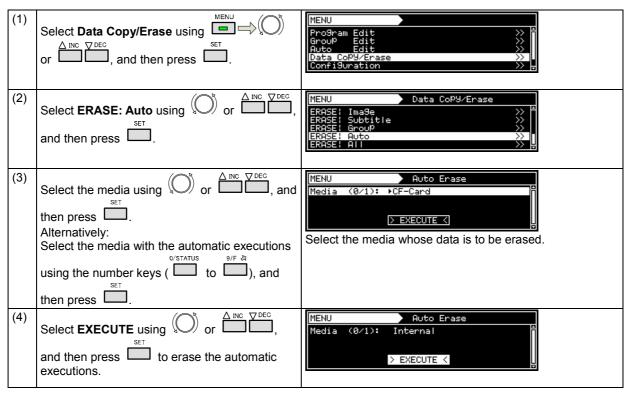

10.1.16 Erasing all data

All the data can be erased together.

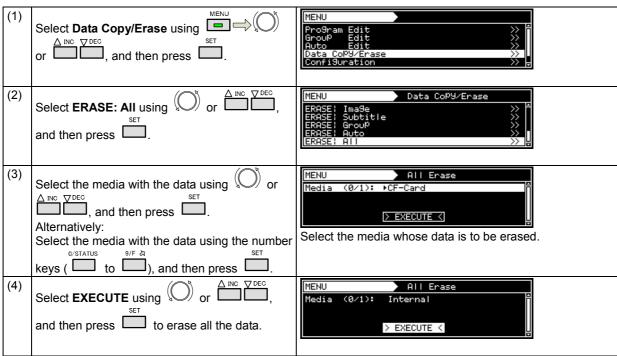

10.2 Short-cut keys


It is possible to set up to any of 90 frequently used screens so that they can be called by pressing the short-cut keys.

(1)	Display the screen which is to be registered as a short-cut, and then press . In the example given here, the HDMI setting screen is registered.	MENU
(2)	Select ShortCUT Key ENTRY using or or and then press . To erase the selection, select SHORTCUT Key ERASE, and then press .	Program Data SAVE Program Data SAVE SHORTCUT Key ENTRY SHORTCUT Key ERASE
(3)	Select the position where the screen is to be registered using or or , and then press. In this example, the screen is saved in 7 in the first page. * The selected positions 1 to 9 correspond to to to	Select Entry Key SHORTCUT 1/10 Current page/total pages
(4)	Set the name of the screen registered. If the name already displayed is acceptable, select OK , and then press . To change the name: Change the name using Set Change the name using and then press . The new name in this example is HDMI-1. When the setting is saved, "Save Completed" is displayed and the registered screen is returned to the display in step (1) above.	Entry Name (max.10)
(5)	Calling a menu screen with SHORTCUT> When is pressed, the SHORTCUT screen is displayed. HDMI-1, which is the registered screen, is now registered in shortcut 7 in the first page. Use , or alternatively use or is to display the HDMI setting screen,	7 HDMI-1 SHORTCUT 1/ 1 current page/total registered pages

* The shortcut key function may be disabled on some display screens. Use ESC to return to the previous screen, and press the keys again.

10.3 Information

The main unit's version, serial number and other information can be displayed.

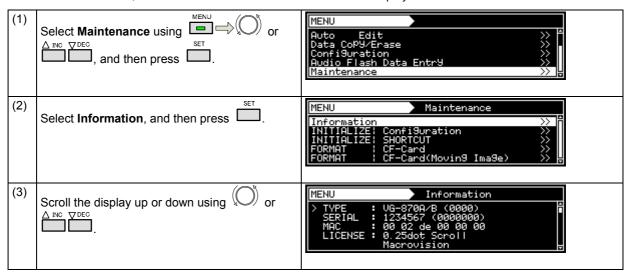

<Table of items displays>

Example of display	Description		
TYPE: VG-870A/B (0000)	Product name		
SERIAL: 1234567 (0000000)	Serial number		
MAC: 00 02 de 00 00 00	MAC address		
LICENSE: 0.25dot Scroll	Usable option functions		
Macrovision			
H/W Ver.: 00 S00-00	Hardware version		
FPGA M01.00/S01.00/R01.00			
F/W Ver.: 01.00 (0000)	Firmware version		
- UNIT	(Listed below is the output unit information.)		
SLOT0) TYPE: VM-1811	Unit type		
SERIAL: 0000000	Serial number		
H/W Ver.: 01(V) S00-00 FPGA01.00	Hardware version		
F/W Ver.: 01.00	Firmware version		
TX1 Ver.: CG V 1.1.1	DisplayPort Transmitter Ver. (DP unit only)		
USER ADJUSTMENT VALUE: R/G/B = +0/+0/+0	User adjustment values (dependent on type of unit)		
R/G/B - +0/+0/+0	* The 'SLOT' number is given in the sequence $(0 \rightarrow 1)$		
	\rightarrow 2) conting from the lowest slot on the rear panel of		
	the main unit.		
	The 'INT' number is given for the internal moving		
	image module		
DIOK ODA OF			
- DISK SPACE	(Listed below is the amount of the device's memory		
FSystem Used Available Mounted	which has been used.) Mounted c: Internal memory		
rom0a 13360 (12%) 96998 c:	d: CF card		
10000 (1270) 00000 0.	a. or oard		

10.4 Data initialization


Initialization restores the system settings and short-cut data to the factory settings.



- Performing this operation initialized all the data stored in the internal memory.
- The generator must be re-started after initialization.


10.4.1 Initializing the system settings

This operation restores the system settings to the factory settings.

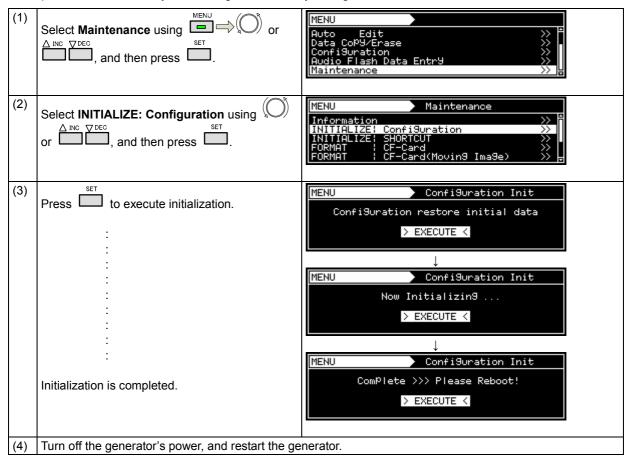

10.4.2 Initializing the short-cut data

This operation restores the short-cut data to the factory settings.

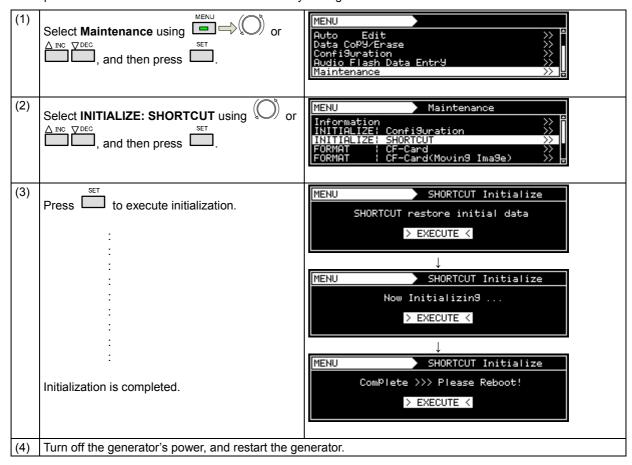


10.5 Formatting

10.5.1 Formatting the CF card

Described below is the procedure used to format the CF card.


* For further details on the CF card used for the moving image module, refer to "10.5.2 Formatting CF cards for exclusive use of moving images."

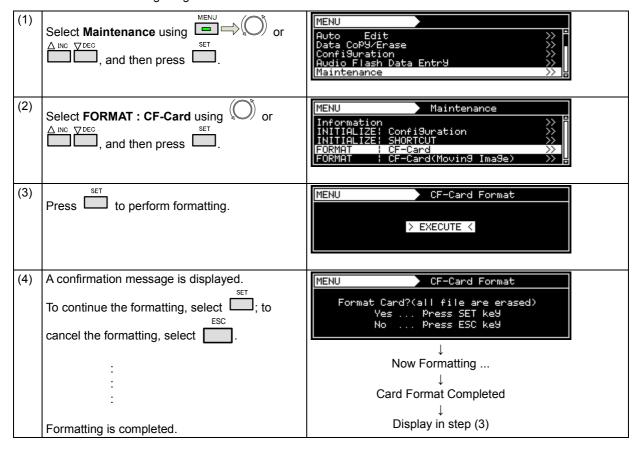

10.5.2 Formatting CF cards for exclusive use of moving images

Described below is the procedure used to format the CF card used exclusively for moving images.

* The CF card for exclusive use of moving images is used with the moving image module, and its ejection slot is located on the side panel of the VG-870B/871B main unit. (For further details, refer to "1.4.7 VG-870B/871B side panel) Bear in mind that the file system for these cards is different from the system for the CF cards used by the slot on the front panel of the VG-870B/871B main unit.

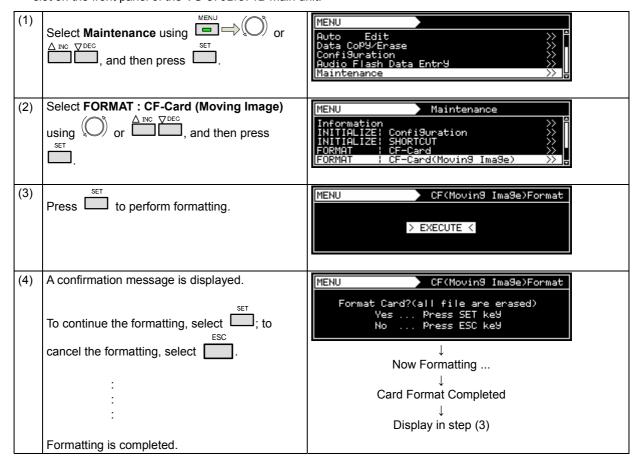

10.5.3 Internal memory formatting and data installation

The procedure for formatting the internal memory is described below.



Formatting the internal memory will delete the data required for the generator's operation so the steps for data installation and firmware version updating must be taken after the memory has been formatted.

<Procedure>

1.	Have the required data ready.	
2.	Format the internal memory.	Refer to <formatting procedure="">.</formatting>
3.	Turn the power on from the off status.	
4.	Install the data.	Refer to < Data installation procedure >.
5.	Turn off the power.	
6.	Update the firmware version.	Refer to <firmware procedure="" updating="" version="">.</firmware>
7.	Power off the power, and then turn it back on.	•


<Required data>

- The required data is the data in the **InitialData** folder on the SP-8870 software installation disk which is provided with the VG generator so copy it onto a CF card.
- If the firmware version has been updated at some point after the generator was purchased, the data of the updated version will be required.

Further action must be taken in either of the following events. Make inquiries with your dealer or an ASTRODESIGN sales representative.

- When APDC patterns (optional) are being used APDC patterns are not included in the data provided with the SP-8870 software.
- When the VG generator is not a standard model
 The data provided with the SP-8870 software is for a standard model.

<Formatting procedure>

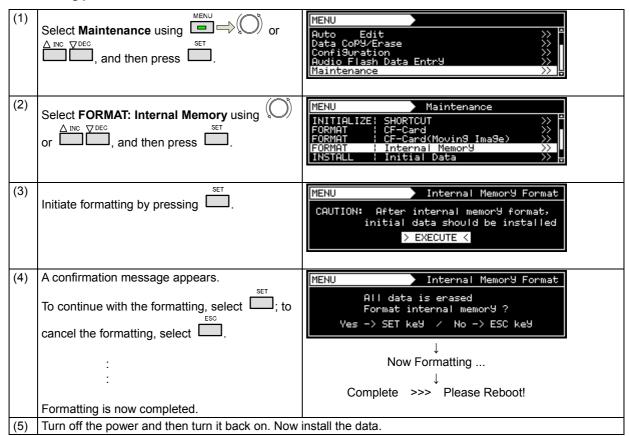

<Data installation procedure>


Preparing the data

Copy the data on the SP-8870 software installation disk (in drive A:) which is provided with the VG generator onto a CF card (in drive B:).

There is a multiple number of files on this disk.

A:¥InitialData¥VG870¥ *.* → B:¥ *.*

Operations performed using the generator's controls

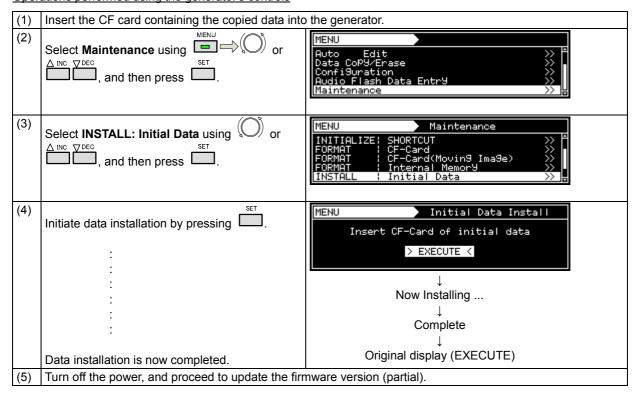

<Firmware version updating procedure>

Use the data which was prepared at the data installation stage.

If the firmware version has been updated at some point after the generator was purchased, copy the data of the updated version onto a CF card.


- (1) Insert the CF card into the generator.
- (2) While holding down , turn on the power.
- (3) The 'FPGA/Firmware Version Up' message appears. Wait a few moments.
- (4) When the 'End. Please reboot!!' message has appeared, and the buzzer has sounded, turn off the power and reboot.

10.6 Adjustments

10.6.1 Adjusting the RGB video levels of the PC analog unit

The RGB video levels of the PC analog unit will be adjusted in this section.


After adjusting the levels, save the data.

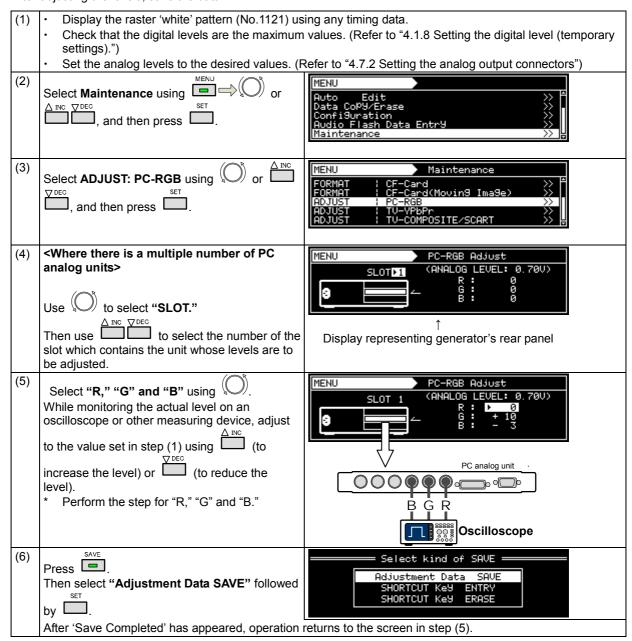

10.6.2 Adjusting the YPbPr video levels of the TV encoder unit

The YPbPr video levels of the TV encoder unit will be adjusted in this section.


After adjusting the levels, save the data.

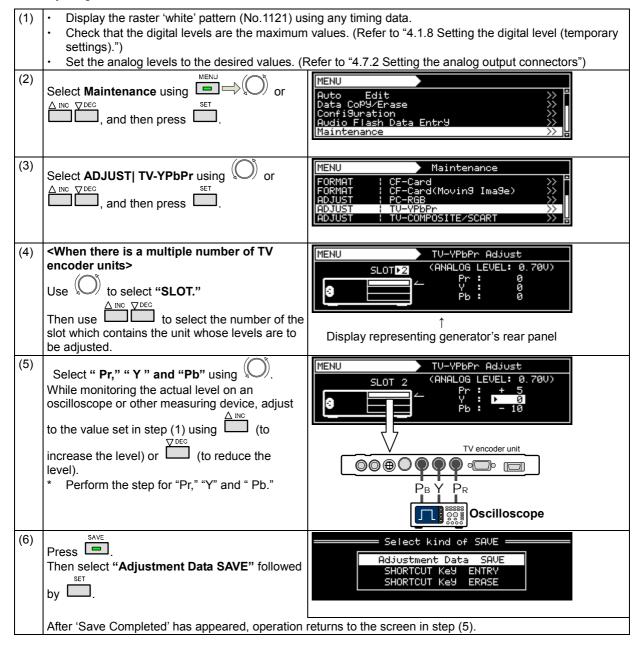

10.6.3 Adjusting the COMPOSITE/SCART video levels of the TV encoder unit

The COMPOSITE/SCART video levels of the TV encoder unit will be adjusted in this section.

After adjusting the levels, save the data.

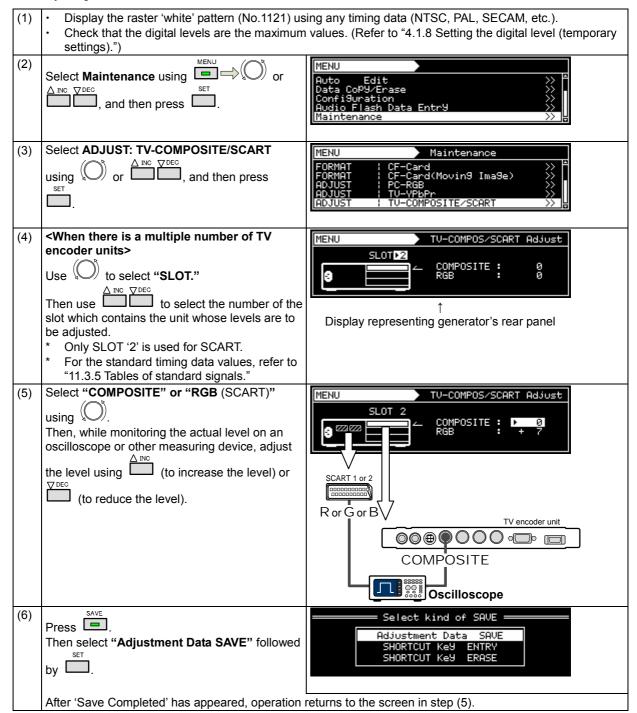



SPECIFICATIONS

11.1 Main specifications

11.1.1 Common specifications

Dot clock frequencies	VG-870B	Analog	8 - 10 bit: 0.100 - 340.000 MHz 11 - 12 bit: 0.100 - 330.000 MHz 13 - 14 bit: 0.100 - 280.000 MHz 15 - 16 bit: 0.100 - 240.000 MHz	
		Digital	8 - 10 bit: 0.100 - 340.000 MHz 11 - 12 bit: 0.100 - 330.000 MHz 13 - 14 bit: 0.100 - 280.000 MHz 15 - 16 bit: 0.100 - 240.000 MHz	
			VM-1824 (with Quad output) 8 - 10 bit: 296.000 - 660.000 MHz 11 - 12 bit: 296.000 - 600.000 MHz	
	VG-871B	Analog	8 to 10 bit: 0.100 - 250.000 MHz 11 - 12 bit: 0.100 - 250.000 MHz 13 - 14 bit: 0.100 - 250.000 MHz 15 - 16 bit: 0.100 - 240.000 MHz	
		Digital	8 - 10 bit: 0.100 - 340.000 MHz 11 - 12 bit: 0.100 - 330.000 MHz 13 - 14 bit: 0.100 - 280.000 MHz 15 - 16 bit: 0.100 - 240.000 MHz	
			VM-1824 (with Quad output) 8 - 10 bit: 296.000 - 660.000 MHz 11 - 12 bit: 296.000 - 600.000 MHz	
Horizontal frequency			Max. 300 kHz, 8192 dots	
Number of vertical scanning lin	ies	Max. 8192 lines *1		
Video memory			4096 dots × 4096 dots	
Serration pulse (Serration)			OFF, 0.5H, 1H or EXOR selectable	
Scanning			Progressive (non-interlaced), interlaced, segmented frame, interlace (sync)	

^{*1} The maximum number of vertical scanning lines is 2046 for the DisplayPort output.

11.1.2 HDMI unit

HDMI1	Version supported		HDMI1.3a			
HDMI2	Connectors		HDMI × 2			
	DotCLK		8-bit output	25 to 165 MHz CLK:165 MHz	`	
			10-bit output	25 to 165 MHz CLK:206.25 MI		
			12-bit output	oit output 25 to 150 MHz (TMDS CLK:225 MHz)		
	No. of colors ger	No. of colors generated		8, 10 or 12 bits each for R, G and B (RGB, YCbCr444 and YCbCr422 formats supported)		
	Audio output	L-PCM	Sampling frequency 192 kHz			
			Output frequency: 100 to one-half of sampling frequency (Hz)			
			No. of bits: 16, 20 or 24 bits			
		Options	Next-generation audio technologies supported DSD, Dolby Digital Plus, Dolby True HD, DTS H (High Resolution Audio), DTS HD (Master Audio etc.		HD, DTS HD	
	Audio input	RCA	Input format	Analog L/R		
		COAXIAL	Input format	S/PDIF format		
		Optical	sampling frequency	Fs = 32 to 192 kHz		
		I2S IN (option)	MCLK frequency	Fs = 48 kHz system	24.576 MHz	
				Fs = 44.1 kHz system	22.5792 MHz	
			Input format	Next-generatio technologies si (I2S format)		
	Copy protection		sampling frequency Fs = 32 to 768 kHz			
			HDCP Ver1.1			
	Additional function	ons	E-EDID Ver1.3 (DDC2B), xvYCC, CEC			

11.1.3 TV encoder unit

	DotCLK	5 to 165 MHz
VGA	No. of colors generated	8 bits each for R, G, B
	Connector	Dsub × 1
5.5	DotCLK	HDTV (1920 × 1080i/1080p/720p), SDTV (720 × 480p/480i)
D5	No. of colors generated	8 bits each for R, G, B
	Connector	D connector × 1 (D5 output supported)
VDI D	DotCLK	HDTV (1920 × 1080i/1080p/720p), SDTV (720 × 480p/480i)
YPbPr	No. of colors generated	8 bits each for R, G, B
	Connector	BNC × 3
	DotCLK	NTSC-M/J/443, PAL (B/D/G/H/I)/M/N/Nc/60, SECAM
COMPOSITE	No. of colors generated	8 bits each for R, G, B
Y/C	Connector	COMPOSITE × 1, Y/C (S-VIDEO) × 1
	Additional functions	Teletext, Closed Caption, V-Chip, Macrovision (options)
	DotCLK	NTSC-M/J/443, PAL (B/D/G/H/I)/M/N/Nc/60, SECAM
SCART1	No. of colors generated	8 bits each for R, G, B
SCART2	Connector	SCART × 2
	Additional functions	Teletext, Closed Caption, V-Chip, Macrovision (options)
ALIDIO	Audio output	RCA × 2
AUDIO L/R	Output frequency	20 to 20 KHz
L/IX	Output level	0 to 2000 mV

11.1.4 PC analog unit

	DotCLK	5 to 300 MHz	
	No. of colors generated	10 bits each for R, G, B	
VGA	Video level	300 to 1200 mV (with OnSync ON)	
RGB/HS/VS		50 to 1200 mV (with OnSync OFF)	
DVI-I (analog unit)	Sync level	HS/VS: TTL	
2 · · · (analog anil)		OnSync: 0 to 600 mV (2-level), 0 to ±600 mV (tri-level)	
	Connector	BNC × 3 (RGB), BNC × 2 (HS/VS), Dsub × 1	
CS	Sync level	CS: 300 mV (2-level), 600 mV (tri-level)	
CS	Connector	BNC × 1	
	DotCLK	25 to 165 MHz	
	No. of colors generated	8 bits each for R, G, B	
DVI-I (digital unit)	Copy protection	HDCP Ver1.0	
	Additional functions	E-EDID Ver1.3 (DDC2B)	
	Connector	DVI-I × 1 (HDCP supported)	

11.1.5 **DVI unit**

	DotCLK	Single Link	25 to 165 MHz (to 8 bits)	
			25 to 165 MHz (to 16 bits)	
		Dual Link	50 to 330 MHz (to 8 bits)	
DVI1	No. of colors gen	erated	16 bits each for R, G, B	
	Copy protection		None	
	Additional function	ns	E-EDID Ver1.3 (DDC2B)	
	Connector		DVI-D × 1 (Dual Link supported)	
	DotCLK		25 to 165 MHz (to 8 bits)	
	No. of colors gen	erated	8 bits each for R, G, B	
DVI2	Copy protection		HDCP Ver1.0	
	Additional function	ns	E-EDID Ver1.3 (DDC2B)	
	Connector		DVI-D × 1 (HDCP supported)	

11.1.6 LVDS unit

	DotCLK	Single Link	20 to 135 MHz (to 16 bits)
LVDS1		Dual Link	40 to 270 MHz (to 14 bits)
LVDS2			40 to 240 MHz (to 16 bits)
LVDS3		Quad Link	80 to 340 MHz (to 10 bits)
LVDS4	No. of colors gen	erated	16 bits each for R, G, B
	Connector		LVDS × 4

11.1.7 PARALLEL unit

	DotCLK	Single Link	0.1 to	100 MHz (to 16 bits)	
		Dual Link	0.2 to 200 MHz (to 8 bits)		
	No. of colors generated		16 bits	s each for R, G, B	
			Output signal voltage level (SIGNAL) and output power supply voltage level (POWER) settings		
PARALLEL1			Pos	sitions of the switches	Voltage level [V]
PARALLEL2				1	1.8
				2	2.5
				3	3.3
				4	5
	Connector		PARA	ALLEL × 2	

11.1.8 **DP unit**

	Version supporte	ed	VESA DisplayPort S	tandard Ver.1.1a	
	Connectors	Connectors			
	DotCLK	Single	16 to 270 MHz		
		Mode	However, according	to each setting. (*1)	
		Dual Mode	32 to 340 MHz		
		Split Mode	However, according	to each setting. (*1)	
	Number of colors	Number of colors		R, G and B (RGB and	
DP1 DP2	Audio output	L-PCM	Sampling frequency: 32/44.1/48/88.2/96 kHz Output frequency: 100 to "half of the sampling frequency" Hz Number of bit: 16/20/24 bit		
	DisplayPort	Link Rate	1.62 GHz/2.7 GHz		
	I/F	Number of Lane	1/2/4 lanes		
	Audio input	Optical	Input format	S/PDIF format	
			Sampling frequency	Fs=32 to 96 kHz	
	Auxiliary channe	Auxiliary channel support		DPCD, EDID, DDC/CI, HDCP	

^{*1} The maximum dot clock for DisplayPort is as follows according to the link rate, number of lanes, drawing mode, bit length, and color format settings.

Item	Item		Maximum dot clock			
Link Rate	Number of lanes	Drawing mode	18 bit	24 bit	30 bit	
			RGB/Y444 6 bit	RGB/Y444 8 bit Y422 12 bit	RGB/Y444 10 bit	
2.7 GHz	1	Single	120 MHz	90 MHz	72 MHz	
(HBR)		Dual/Split	240 MHz	180 MHz	144 MHz	
	2	Single	240 MHz	180 MHz	144 MHz	
		Dual/Split	340 MHz	340 MHz	288 MHz	
	4	Single	270 MHz	270 MHz	270 MHz	
		Dual/Split	340 MHz	340 MHz	340 MHz	
1.62 GHz	1	Single	72 MHz	54 MHz	43.2 MHz	
(RBR)		Dual/Split	144 MHz	108 MHz	86.4 MHz	
	2		144 MHz	108 MHz	86.4 MHz	
		Dual/Split	288 MHz	216 MHz	172.8 MHz	
	4	Single	270 MHz	216 MHz	172.8 MHz	
		Dual/Split	340 MHz	340 MHz	340 MHz	

^{*2} The DisplayPort output can be output at a horizontal timing of only 2-dot units in Single mode, or 4-dot units in Dual or Split mode.

^{*3} When the YCbCr4:2:2 format has been selected, up to 12 bits can be set as the bit length. However, it is not possible to display the gray scale which accords with the bit length (gray scale) which has been set (64-step gray scale with an 8-bit output). Use this parameter to check the Main Stream Attribute parameters rather than using it to assess the image quality.

^{*4} The maximum number of vertical scanning lines is 2046 for the DisplayPort output.

11.1.9 iTMDS, iTMDS Quad unit

		DVI		25 to 165MHz (SingleLink)
DVI1	DotCLK	MODE	8bit	50 to 330MHz (DualLink)
		iTMDS MODE	8-10bit	25 to 165MHz (SingleLink) 50 to 330MHz (DualLink)
			12bit	25 to 150MHz (SingleLink) 50 to 300MHz (DualLink)
DVI2 (DVI3)		MULTI CH MODE	10-16bit	25 to 165MHz (DualLink) 50 to 330MHz (QuadLink)
(DVI4)		4Kx2K MODE	8-12bit	296 to 660MHz (QuadLink) 592 to 1320MHz (OctalLink) *1
	Number of colors generated			16 bits each for R, G, B
	Copy protection			HDCP Ver.1.0 (scheduled) *2
	Additional function			E-EDID Ver1.3(DDC2B) *3

^{*1} Octal Link takes effect only when two output boards are used. It will not work when only one board is used.

Horizontal timing restrictions

Minimum horizontal blanking period 86 dots (160 dots in the 2-board mode) Minimum horizontal display width 476 dots (996 dots in the 2-board mode)

Setting increments for VM-1824 (VM-1824-A) screen splitting

	Quad			Octal
	Н	V	Н	V
Mode 0	2dot	2line	4dot	2line
Mode 1	4dot	1line	8dot	1line
Mode 2	2dot	2line	4dot	2line
Mode 3	4dot	1line	8dot	1line

	Quad (x4Mode)				
	Н	V			
Mode 0	4dot(8dot)	1line			
Mode 1	4dot(8dot)	1line			
Mode 2	4dot(8dot)	1line			
Mode 3	4dot(8dot)	1line			
Mode 4	4dot(8dot)	1line			

 $^{^{\}star}$ When the screen is split-output into 8 using IA-1540, the setting increment is 8-dot.

^{*2} The VM-1824 is scheduled to support copy protection with a firmware version upgrade.

^{*3} This has been supported starting with firmware version Ver.3.30.

11.1.10 V-by-One HS unit

		Normal	0.4013	20 to 75 MHz (1 Lane)
		MODE	8-10 bit	40 to 150 MHz (2 Lane)
				80 to 300 MHz (4 Lane)
V-by-One HS1	DotCLK	4k2k (60Hz) MODE x4 MODE	8-10 bit	160 to 600 MHz (8 Lane)
V-by-One HS2	Video format	•	RGB、YCbCr4:4:4	
	Color resolut	ion		With 8 bits: 256 × RGB (YC) colors With 10 bits: 1024 × RGB (YC) colors
	Level setting		With 8 bits: 256 steps With 10 bits: 1024 steps	

• Setting increments for VM-1825 screen splitting

		8Lane		16Lane	
	Н	V	Н	V	
Mode 0	2dot	2line	4dot	2line	
Mode 1	4dot	1line	8dot	1line	
Mode 2	2dot	2line	4dot	2line	
Mode 3	4dot	1line	8dot	1line	

	8Lane (x4Mode)			
	Н	V		
Mode 0	4dot	1line		
Mode 1	4dot	1line		
Mode 2	4dot	1line		
Mode 3	4dot	1line		
Mode 4	4dot	1line		

11.1.11 SDI unit


The SDI outputs take effect only with the timings are rated below.

SDI1 SDI2 SDI3 SDI4 Formats supported		SD-SDI	NTSC PAL		YCbCr:422 10bit	SMPTE-259M
			1920x1080p	30/29.97/25/24/23.98	YCbCr:422 10bit	SMPTE-274M
			1920x1080psf	30/29.97/25/24/23.98		
		HD-SDI	1920x1080i	60/59.94/50		
			1280x720p	60/59.94/50 30/29.97/25/24/23.98	YCbCr:422 10bit	SMPTE-296M
			1920x1080p	60/59.94/50	YCbCr:422 10bit	
			1920x1080p	30/29.97/25/24/23.98	YCbCr:422 12bit	
		3G-SDI	1920x1080psf	30/29.97/25/24/23.98	YCbCr:444 10bit YCbCr:444 12bit RGB 10bit RGB 12bit	44 12bit SMPTE-425M bit
		(LEVEL A/B)	1920x1080i	60/59.94/50		
			1280x720p	60/59.94/50 30/29.97/25		
			1920x1080p	60/59.94/50		
	Formats		2048x1080p	24	YCbCr:422 10bit	:422 12bit :444 10bit
	supported	Dual-Link	1920x1080p	30/29.97/25/24/23.98	YCbCr:422 12bit YCbCr:444 10bit	
			1920x1080psf	30/29.97/25/24/23.98		
			1920x1080i	60/59.94/50	YCbCr:444 12bit	
			No. of channels: 8 Sampling frequency: 48 kHz Output frequency: 100 to (one-half of sampling frequency) Hz No. of bits: 16 20 or 24 bits		RGB 10bit RGB 12bit	SMPTE-372M
	Audio output	L-PCM		•	•	

^{*1} The SDI outputs are as shown below.

- (1) SD/HD/3G-SDI
 - The signals are distributed from OUT1, OUT2, OUT3 and OUT4, and output.
- (2) Dual-Link

The signals are output from OUT1 and OUT3 as one pair and OUT2 and OUT4 as another pair (to form two distributed outputs).

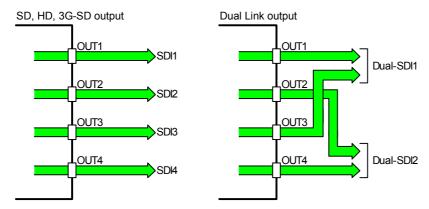

11.1.12 Moving image module

Image memory	4GB (SO-DIMM 2GB × 2)	
Video format	RGB (4:4:4)/10 bit	
	YPbPr (4:2:2)/10 bit	
Playback time	Full HD (1920 × 1080)/60p	RGB (4:4:4) approx. 8 sec. YPbPr (4:2:2) approx. 12 sec.

11.1.13 External control


Dedicated remote controllers	RB-1870, RB-1871
Serial control	RS-232C
LAN	10/100BASE-T

11.1.14 General specifications

Supply voltage	AC100 to 240 V
Power line frequency	50/60 Hz
Power consumption	80 VA MAX
Dimensions	430 (W) × 88 (H) × 370 (D) mm (excluding protrusions)
Weight	Approx. 6.85 kg (when 3 output units have been installed)
Operating temperature range	5 to 40°C
Operating humidity range	30 to 80%RH (no condensation)

11.2 Connector specifications

11.2.1 RS232C-Connector



Pin no.	I/O	Signal
1	-	NC
2	0	TXD (transmitted data)
3	1	RXD (received data)
4	-	Shorted with pin 6
5	-	FG (frame ground)
6	-	Shorted with pin 4
7	1	CTS (clear to send)
8	0	RTS (request to send)
9	-	NC

11.2.2 Trigger-Connector



Pin no.	I/O	Signal
1	0	TRIG_OUT3
2	0	TRIG_OUT2
3	0	TRIG_OUT1
4	-	GND
5	0	TRIG_OUT0
6	-	GND
7	I	RESEARVE
8	-	GND

* The output of trigger is an open-collector output. It is pulled up by 10Ω , 5V internally.

11.3 Internal data

11.3.1 Program data

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	poľa	nc arity V	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1001	31.47	59.94	25.175	640 × 480	Prog	N	Ν	ANALOG	RGB	EIA640 × 480p@59.94	100%/100% color bars, horizontal direction	Color Bar 100/100-H
1002	31.50	60.00	25.200	640 × 480	Prog	N	N	ANALOG	RGB	EIA640 × 480p@60	100%/75% color bars, horizontal direction	Color Bar 100/75-H
1003	31.47	59.94	27.000	720 × 480	Prog	N	Ν	ANALOG	YPbPr	EIA720 × 480p@59.94	75%/75% color bars, horizontal direction	Color Bar 75/75-H
1004	31.50	60.00	27.027	720 × 480	Prog	Ν	Ν	ANALOG	YPbPr	EIA720 × 480p@60	SMPTE color bars	Color Bar SMPTE
1005	31.47	59.94	27.000	720 × 480	Prog	N	N	ANALOG	YPbPr		RGBW color bars, vertical direction	Color Bar RGBW-V
1006	31.50	60.00	27.027	720 × 480	Prog	Ν	Ν	ANALOG	YPbPr	EIA720 × 480pW@60	xvYCC 4% color bars	Color Bar xvYCC 4%
1007	44.96	59.94	74.176	1280 × 720	Prog	Р	Р	HDTV720	YPbPr	EIA1280 × 720p@59.94	xvYCC 8% color bars	Color Bar xvYCC 8%
1008	45.00	60.00	74.250	1280 × 720	Prog	Р	Р	HDTV720	YPbPr	EIA1280 × 720p@60	xvYCC 12% color bars	Color Bar xvYCC 12%
1009	33.72	59.94	74.176	1920 × 1080	Int	Р	Р	HDTV1080	YPbPr	EIA1920 × 1080i@59.94	100%/100% color bars, horizontal direction 2	Color Bar 100/100-H2
1010	33.75	60.00	74.250	1920 × 1080	Int	Р	Р	HDTV1080	YPbPr	EIA1920 × 1080i@60		
1011	15.73	59.94	27.000	1440 × 480	Int	Ν	Ν	ANALOG	YPbPr	EIA1440 × 480i@59.94		
1012	15.75	60.00	27.028	1440 × 480	Int	Ν	Ν	ANALOG	YPbPr	EIA1440 × 480i@60		
1013	15.73	59.94	27.000	1440 × 480	Int	N	Ν	ANALOG	YPbPr	EIA1440 × 480iW@59.94		
1014	15.75	60.00	27.028	1440 × 480	Int	Ν	Ν	ANALOG	YPbPr	EIA1440 × 480iW@60		
1015	15.73	60.05	27.000	1440 × 240	Prog	Ν	Ν	ANALOG	YPbPr	EIA1440 × 240p@59.94		
1016	15.75	60.12	27.028	1440 × 240	Prog	N	N	ANALOG	YPbPr	EIA1440 × 240p@60		
1017	15.73	59.83	27.000	1440 × 240	Prog	N	Ν	ANALOG	YPbPr	EIA1440 × 240p@59.94		
1018	15.75	59.89	27.028	1440 × 240	Prog	N	Ν	ANALOG	YPbPr	EIA1440 × 240p@60		
1019	15.73	60.05	27.000	1440 × 240	Prog	N	N	ANALOG	YPbPr	EIA1440 × 240pW@59.94		
1020	15.75	60.12	27.028	1440 × 240	Prog	Ν	Ν	ANALOG	YPbPr	EIA1440 × 240pW@60		

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	Sy pol)	arit	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1021	15.73	59.83	27.000	1440 × 240	Prog	N	N	ANALOG	YPbPr	EIA1440 × 240pW@59.94		
1022	15.75	59.89	27.028	1440 × 240	Prog	N	N	ANALOG	YPbPr	EIA1440 × 240pW@60		
1023	15.73	59.94	54.000	2880 × 480	Int	N	N	ANALOG	YPbPr	EIA2880 × 480i@59.94		
1024	15.75	60.00	54.054	2880 × 480	Int	N	N	ANALOG	YPbPr	EIA2880 × 480i@60		
1025	15.73	59.94	54.000	2880 × 480	Int	Ν	Ν	ANALOG	YPbPr	EIA2880 × 480iW@59.94		
1026	15.75	60.00	54.054	2880 × 480	Int	N	Ν	ANALOG	YPbPr	EIA2880 × 480iW@60		
1027	15.73	60.05	54.000	2880 × 240	Prog	Ν	Ν	ANALOG	YPbPr	EIA2880 × 240p@59.94		
1028	15.75	60.11	54.054	2880 × 240	Prog	Ν	Ν	ANALOG	YPbPr	EIA2880 × 240p@60		
1029	15.73	59.83	54.000	2880 × 240	Prog	N	Ν	ANALOG	YPbPr	EIA2880 × 240p@59.94		
1030	15.75	59.89	54.054	2880 × 240	Prog	N	Ν	ANALOG	YPbPr	EIA2880 × 240p@59.94		
1031	15.73	60.05	54.000	2880 × 240	Prog	N	Ν	ANALOG	YPbPr		Gray scale, horizontal direction (4 steps)	Gray Scale H-4step
1032	15.75	60.11	54.054	2880 × 240	Prog	Z	Ν	ANALOG	YPbPr	Ι ΕΙΔ /ΧΧΙΙ Χ <i>/</i> ΔΙΙΝ// <i>/(</i> Ω)ΝΙΙ	Gray scale, horizontal direction (8 steps)	Gray Scale H-8step
1033	15.73	59.83	54.000	2880 × 240	Prog	Z	Ν	ANALOG	YPbPr		Gray scale, horizontal direction (16 steps)	Gray Scale H-16step
1034	15.75	59.89	54.054	2880 × 240	Prog	N	Ν	ANALOG	YPbPr		Gray scale, horizontal direction (32 steps)	Gray Scale H-32step
1035	31.47	59.94	54.000	1440 × 480	Prog	Ν	Ν	ANALOG	YPbPr	EIA1440 × 480p@59.94	Gray scale, horizontal direction (64 steps)	Gray Scale H-64step
1036	31.50	60.00	54.054	1440 × 480	Prog	Z	Ν	ANALOG	YPbPr		Gray scale, horizontal direction (128 steps)	Gray Scale H-128step
1037	31.47	59.94	54.000	1440 × 480	Prog	Ν	N	ANALOG	YPbPr		Gray scale, horizontal direction (256 steps)	Gray Scale H-256step
1038	31.50	60.00	54.054	1440 × 480	Prog	Ζ	Ν	ANALOG	YPbPr		Gray scale, vertical direction (4 steps)	Gray Scale V-4step
1039	67.43	59.94	148.352	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	EIA 1920 × 1060p@59.94	ISTEDS)	Gray Scale V-8step
1040	67.50	60.00	148.500	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	EIA1920 × 1080p@60	Gray scale, vertical direction (16 steps)	Gray Scale V-16step

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	Sy pol)	nc arit /	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1041	31.25	50.00	27.000	720 × 576	Prog	Ν	N	ANALOG	YPbPr	EIA720 × 576p@50	Gray scale, vertical direction (32 steps)	
1042	31.25	50.00	27.000	720 × 576	Prog	N	Ν	ANALOG	YPbPr	EIA720 × 576pW@50	Gray scale, vertical direction (64 steps)	Gray Scale V-64step
1043	37.50	50.00	74.250	1280 × 720	Prog	Р	Р	HDTV720	YPbPr	EIA1280 × 720p@50	Gray scale, vertical direction (128 steps)	Gray Scale V-128step
1044	28.13	50.00	74.250	1920 × 1080	Int	Р	Р	HDTV1080	YPbPr	EIA1920 × 1080i@50	Gray scale, vertical direction (256 steps)	Gray Scale V-256step
1045	15.63	50.00	27.000	1440 × 576	Int	N	Ν	ANALOG	YPbPr	EIA1440 × 576i@50	Linear ramp, horizontal direction	Ramp Linear-H
1046	15.63	50.00	27.000	1440 × 576	Int	N	Ν	ANALOG	YPbPr	EIA1440 × 576iW@50	Linear ramp, vertical direction	Ramp Linear-V
1047	15.63	50.08	27.000	1440 × 288	Prog	Ν	Ν	ANALOG	YPbPr	EIA1440 × 288p@50	Linear ramp, horizontal and vertical directions	Ramp Linear-HV
1048	15.63	49.92	27.000	1440 × 288	Prog	Z	Z	ANALOG	YPbPr	EIA1440 × 288p@50		Ramp Linear-H RGBW-H
1049	15.63	49.76	27.000	1440 × 288	Prog	Ν	N	ANALOG	YPbPr	EIA1440 × 288p@50		Ramp Linear-V RGBW-V
1050	15.63	50.08	27.000	1440 × 288	Prog	Z	N	ANALOG	YPbPr	EIA1440 × 288pW@50		Ramp Linear-H RGBW-V
1051	15.63	49.92	27.000	1440 × 288	Prog	Ν	Ν	ANALOG	YPbPr	EIA1440 × 288pW@50	Turn ramp	Ramp-H 1Level/dot
1052	15.63	49.76	27.000	1440 × 288	Prog	Ν	Z	ANALOG	YPbPr	EIA1440 × 288pW@50		
1053	15.63	50.00	54.000	2880 × 576	Int	Ν	Z	ANALOG	YPbPr	EIA2880 × 576i@50		Ramp Linear H:G V:R
1054	15.63	50.00	54.000	2880 × 576	Int	Ν	Z	ANALOG	YPbPr	EIA2880 × 576iW@50		Ramp Linear H:B V:R
1055	15.63	50.08	54.000	2880 × 288	Prog	Ν	Z	ANALOG	YPbPr	EIA2880 × 288p@50		Ramp Linear H:B V:G
1056	15.63	49.92	54.000	2880 × 288	Prog	Ν	Ν	ANALOG	YPbPr	EIA2880 × 288p@50		Ramp Linear H:R V:G
1057	15.63	49.76	54.000	2880 × 288	Prog	N	Ν	ANALOG	YPbPr	EIA2880 × 288p@50		Ramp Linear H:R V:B
1058	15.63	50.08	54.000	2880 × 288	Prog	N	Ν	ANALOG	YPbPr	EIA2880 × 288pW@50		Ramp Linear H:G V:B
1059	15.63	49.92	54.000	2880 × 288	Prog	Ν	N	ANALOG	YPbPr	EIA2880 × 288pW@50	128-step gray scale ramp (top: R L, bottom: R L)	Ramp 128 R->L L->R
1060	15.63	49.76	54.000	2880 × 288	Prog	N	N	ANALOG	YPbPr	EIA2880 × 288pW@50	256-step gray scale ramp (top: R L, bottom: R L)	Ramp 256 R->L L->R

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	Sy pol Y	arit	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1061	31.25	50.00	54.000	1440 × 576	Prog	N	Ν	ANALOG	YPbPr	EIA1440 × 576p@50		
1062	31.25	50.00	54.000	1440 × 576	Prog	Ν	Ν	ANALOG	YPbPr	EIA1440 × 576pW@50		
1063	56.25	50.00	148.500	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	EIA1920 × 1080p@50		
1064	26.97	23.98	74.176	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	EIA1920 × 1080p@23.97		
1065	27.00	24.00	74.250	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	EIA1920 × 1080p@24		
1066	28.13	25.00	74.250	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	EIA1920 × 1080p@25		
1067	33.72	29.97	74.176	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	EIA1920 × 1080p@29.97		
1068	33.75	30.00	74.250	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	EIA1920 × 1080p@30		
1069	31.47	59.94	108.000	2880 × 480	Prog	N	N	ANALOG	YPbPr	EIA2880 × 480p@59.94		
1070	31.50	60.00	108.108	2880 × 480	Prog	N	N	ANALOG	YPbPr	EIA2880 × 480p@60		
1071	31.47	59.94	108.000	2880 × 480	Prog	N	N	ANALOG	YPbPr	EIA2880 × 480pW@59.94	Linear ramp, horizontal direction + scroll	Ramp Linear-H Scroll
1072	31.50	60.00	108.108	2880 × 480	Prog	N	N	ANALOG	YPbPr	EIA2880 × 480pW@60	Linear ramp, vertical direction + scroll	Ramp Linear-V Scroll
1073	31.25	50.00	108.000	2880 × 576	Prog	N	N	ANALOG	YPbPr	EIA2880 × 576p@50	Linear ramp, horizontal and vertical directions + scroll	Ramp Linear-HV Scroll
1074	31.25	50.00	108.000	2880 × 576	Prog	N	N	ANALOG	YPbPr	EIA2880 × 576pW@50		
1075	31.25	50.00	72.000	1920 × 1080	Int	Р	Ν	HDTV1250 (AUS)	YPbPr	EIA1920 × 1080i@50		
1076	56.25	100.00	148.500	1920 × 1080	Int	Р	Р	HDTV1080	YPbPr	EIA1920 × 1080i@100		
1077	75.00	100.00	148.500	1280 × 720	Prog	Р	Р	HDTV720	YPbPr	EIA1280 × 720p@100		
1078	62.50	100.00	54.000	720 × 576	Prog	N	N	ANALOG	YPbPr	EIA720 × 576p@100		
1079	62.50	100.00	54.000	720 × 576	Prog	Ν	Ν	ANALOG	YPbPr	EIA720 × 576pW@100		
1080	31.25	100.00	54.000	1440 × 576	Int	N	Ν	ANALOG	YPbPr	EIA1440 × 576i@100		

Program No.	Horizontal frequency [KHz]		Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	pola	nc arity V	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1081	31.25	100.00	54.000	1440 × 576	Int	Ν	Ζ	ANALOG	YPbPr	EIA1440 × 576iW@100		
1082	67.43	119.88	148.352	1920 × 1080	Int	Р	Р	HDTV1080	YPbPr	EIA1920 × 1080i@119.88		
1083	67.50	120.00	148.500	1920 × 1080	Int	Р	Р	HDTV1080	YPbPr	EIA1920 × 1080i@120		
1084	89.91	119.88	148.352	1280 × 720	Prog	Р	Р	HDTV720	YPbPr	EIA1280 × 720p@119.88		
1085	90.00	120.00	148.500	1280 × 720	Prog	Р	Р	HDTV720	YPbPr	EIA1280 × 720p@120		
1086	62.94	119.88	54.000	720 × 480	Prog	Ν	Ζ	ANALOG	YPbPr	EIA720 × 480p@119.88		
1087	63.00	120.00	54.054	720 × 480	Prog	N	Ν	ANALOG	YPbPr	EIA720 × 480p@120		
1088	62.94	119.88	54.000	720 × 480	Prog	N	Ν	ANALOG	YPbPr	EIA720 × 480pW@119.88		
1089	63.00	120.00	54.054	720 × 480	Prog	Ν	Z	ANALOG	YPbPr	EIA720 × 480pW@120		
1090	31.47	119.88	54.000	1440 × 480	Int	Ν	Ζ	ANALOG	YPbPr	EIA1440 × 480i@119.88		
1091	31.50	120.00	54.054	1440 × 480	Int	Ν	Ζ	ANALOG	YPbPr	EIA1440 × 480i@120		
1092	31.47	119.88	54.000	1440 × 480	Int	N	Ν	ANALOG	YPbPr	EIA1440 × 480iW@119.88		
1093	31.50	120.00	54.054	1440 × 480	Int	N	Ν	ANALOG	YPbPr	EIA1440 × 480iW@120		
1094	125.00	200.00	108.000	720 × 576	Prog	Z	Ν	ANALOG	YPbPr	EIA720 × 576p@200		
1095	125.00	200.00	108.000	720 × 576	Prog	Ν	Ζ	ANALOG	YPbPr	EIA720 × 576pW@200		
1096	62.50	200.00	108.000	1440 × 576	Int	Ν	Ζ	ANALOG	YPbPr	EIA1440 × 576i@200		
1097	62.50	200.00	108.000	1440 × 576	Int	N	N	ANALOG	YPbPr	EIA1440 × 576iW@200		
1098	125.87	239.76	108.000	720 × 480	Prog	N	N	ANALOG	YPbPr	EIA720 × 480p@239.76		
1099	126.00	240.00	108.108	720 × 480	Prog	N	Ν	ANALOG	YPbPr	EIA720 × 480p@240		
1100	125.87	239.76	108.000	720 × 480	Prog	N	N	ANALOG	YPbPr	EIA720 × 480pW@239.76		

Program No.	Horizontal frequency [KHz]		Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	pola	nc arity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1101	126.00	240.00	108.108	720 × 480	Prog	Ν	Ν	ANALOG	YPbPr	EIA720 × 480pW@240	Multi burst 100%	Multi Burst 100%
1102	62.94	239.76	108.000	1440 × 480	Int	N	Ν	ANALOG	YPbPr	EIA1440 × 480i@239.76	Multi burst 50%	Multi Burst 50%
1103	63.00	240.00	108.108	1440 × 480	Int	N	N	ANALOG	YPbPr	EIA1440 × 480i@240	Sweep pattern	Sweep
1104	62.94	239.76	108.000	1440 × 480	Int	N	N	ANALOG	YPbPr	EIA1440 × 480iW@239.76	APDC pattern	APDC
1105	63.00	240.00	108.108	1440 × 480	Int	N	N	ANALOG	YPbPr	EIA1440 × 480iW@240		
1106												
1107												
1108												
1109												
1110												
1111											OPT38 (SMPTE RP-133)	SMPTE RP-133
1112											OPT39 (SMPTE color version)	SMPTE RP-133+Color
1113											Monoscope	Monoscope
1114											Philips pattern	Philips
1115											Chinese monoscope	China Monoscope
1116											APDC1	APDC1
1117											APDC2	APDC2
1118											APDC3	APDC3
1119											APDC4	APDC4
1120												

^{*} Programs No. 1116 to 1119 require license registration. When the license is not input, a license error results. For information on purchasing a license, contact an Astrodesign sales representative.

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	nc arity V	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1121										White solid	Raster White
1122										Red solid	Raster Red
1123										Green solid	Raster Green
1124										Blue solid	Raster Blue
1125										Black solid	Raster Black
1126										50% solid gray	Raster 50%Gray
1127										Magenta solid	Raster Magenta
1128										Cyan solid	Raster Cyan
1129										Yellow solid	Raster Yellow
1130											
1131											
1132											
1133											
1134											
1135											
1136											
1137											
1138											
1139											
1140											

Program No.	Horizontal frequency [KHz]		Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	Sy pola H	arity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1141											Overscan pattern	Over Scan
1142											AFD pattern 4:3 Type 0	AFD 4:3 Type0
1143											AFD pattern 4:3 Type 1	AFD 4:3 Type1
1144											AFD pattern 4:3 Type 2	AFD 4:3 Type2
1145											AFD pattern 4:3 Type 3	AFD 4:3 Type3
1146											AFD pattern 4:3 Type 4	AFD 4:3 Type4
1147											AFD pattern 4:3 Type 5	AFD 4:3 Type5
1148											AFD pattern 4:3 Type 6	AFD 4:3 Type6
1149											AFD pattern 4:3 Type 7	AFD 4:3 Type7
1150											AFD pattern 4:3 Type 8	AFD 4:3 Type8
1151	31.47	59.94	27.000	720 × 480	Prog	Ν	Ν	ANALOG	YPbPr	EIA480p59-YCC-12	AFD pattern 4:3 Type 9	AFD 4:3 Type9
1152	33.72	59.94	74.176	1920 × 1080	Int	Р	Р	HDTV1080	YPbPr	EIA1080i59-YCC-12	AFD pattern 4:3 Type 10	AFD 4:3 Type10
1153	44.96	59.94	74.176	1280 × 720	Prog	Р	Р	HDTV720	YPbPr	EIA720p59-YCC-12	AFD pattern 4:3 Type 11	AFD 4:3 Type11
1154	31.47	59.94	25.175	640 × 480	Prog	Ν	Ν	ANALOG	RGB	EIA480p59-YCC-12	AFD pattern 4:3 Type 12	AFD 4:3 Type12
1155	67.43	59.94	148.352	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	EIA1080p59-YCC-12	AFD pattern 16:9 Type 0	AFD 16:9 Type0
1156	15.73	59.94	27.000	1440 × 480	Int	Ν	Ν	ANALOG	YPbPr	EIA480i59-YCC-12	AFD pattern 16:9 Type 1	AFD 16:9 Type1
1157	27.00	24.00	74.250	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	EIA1080p24-YCC-12	AFD pattern 16:9 Type 2	AFD 16:9 Type2
1158	31.25	50.00	27.000	720 × 576	Prog	Ν	Ν	ANALOG	YPbPr	EIA576p50-YCC-12	AFD pattern 16:9 Type 3	AFD 16:9 Type3
1159	28.13	50.00	74.250	1920 × 1080	Int	Р	Р	HDTV1080	YPbPr	EIA1080i50-YCC-12	AFD pattern 16:9 Type 4	AFD 16:9 Type4
1160	37.50	50.00	74.250	1280 × 720	Prog	Р	Р	HDTV720	YPbPr	EIA720p50-YCC-12	AFD pattern 16:9 Type 5	AFD 16:9 Type5

Program No.	Horizontal frequency [KHz]		Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	pola	nc arity V	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1161	56.25	50.00	148.500	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	EIA1080p50-YCC-12	AFD pattern 16:9 Type 6	AFD 16:9 Type6
1162	15.63	50.00	27.000	1440 × 576	Int	Ν	Ν	ANALOG	YPbPr	EIA576i50-YCC-12	AFD pattern 16:9 Type 7	AFD 16:9 Type7
1163	28.13	25.00	74.250	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	EIA1080p25-YCC-12	AFD pattern 16:9 Type 8	AFD 16:9 Type8
1164											AFD pattern 16:9 Type 9	AFD 16:9 Type9
1165											AFD pattern 16:9 Type 10	AFD 16:9 Type10
1166											AFD pattern 16:9 Type 11	AFD 16:9 Type11
1167											AFD pattern 16:9 Type 12	AFD 16:9 Type12
1168												
1169												
1170												
1171	31.47	59.94	27.000	720 × 480	Prog	Ν	Ν	ANALOG	YPbPr	EIA480p59-RGB-12		
1172	33.72	59.94	74.176	1920 × 1080	Int	Р	Р	HDTV1080	YPbPr	EIA1080i59-RGB-12		
1173	44.96	59.94	74.176	1280 × 720	Prog	Р	Р	HDTV720	YPbPr	EIA720p59-RGB-12		
1174	31.47	59.94	25.175	640 × 480	Prog	N	Ν	ANALOG	RGB	EIA480p59-RGB-12		
1175	67.43	59.94	148.352	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	EIA1080p59-RGB-12		
1176	15.73	59.94	27.000	1440 × 480	Int	N	Ν	ANALOG	YPbPr	EIA480i59-RGB-12		
1177	27.00	24.00	74.250	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	EIA1080p24-RGB-12		
1178	31.25	50.00	27.000	720 × 576	Prog	N	Ν	ANALOG	YPbPr	EIA576p50-RGB-12		
1179	28.13	50.00	74.250	1920 × 1080	Int	Р	Р	HDTV1080	YPbPr	EIA1080i50-RGB-12		
1180	37.50	50.00	74.250	1280 × 720	Prog	Р	Р	HDTV720	YPbPr	EIA720p50-RGB-12		

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	lnol:	nc arity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1181	56.25	50.00	148.500	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	EIA1080p50-RGB-12		
1182	15.63	50.00	27.000	1440 × 576	Int	N	Ζ	ANALOG	YPbPr	EIA576i50-RGB-12		
1183	28.13	25.00	74.250	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	EIA1080p25-RGB-12		
1184												
1185												
1186												
1187												
1188												
1189												
1190												
1191	33.72	59.94	74.176	1920 × 1080	Int	Р	Р	HDTV1080	YPbPr	EIA1080i59-YCC-12-xv		
1192	44.96	59.94	74.176	1280 × 720	Prog	Р	Р	HDTV720	YPbPr	EIA720p59-YCC-12-xv		
1193	67.43	59.94	148.352	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	EIA1080p59-YCC-12-xv		
1194	27.00	24.00	74.250	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	EIA1080p24-YCC-12-xv		
1195	28.13	50.00	74.250	1920 × 1080	Int	Р	Р	HDTV1080	YPbPr	EIA1080i50-YCC-12-xv		
1196	37.50	50.00	74.250	1280 × 720	Prog	Р	Р	HDTV720	YPbPr	EIA720p50-YCC-12-xv		
1197	56.25	50.00	148.500	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	EIA1080p50-YCC-12-xv		
1198	28.13	25.00	74.250	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	EIA1080p25-YCC-12-xv		
1199												
1200												

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	Syi pola H	rity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1201											1-dot × 1-dot checker	Checker 1dot*1dot
1202											2-dot × 1-dot checker	Checker 2dot*1dot
1203											4-dot × 1-dot checker	Checker 4dot*1dot
1204											4 × 4 checker	Checker 4*4
1205											8 × 8 checker	Checker 8*8
1206											Sub-pixel checker	SubPixel
1207												
1208												
1209												
1210												
1211												
1212												
1213												
1214												
1215												
1216			-									
1217												
1218			·					·				
1219								· · · · · · · · · · · · · · · · · · ·				
1220			·					·				

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog		arity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
	[KHZ]	[1 12]	[IVII IZ]	(II ^ V)		Н	٧					
1221											Character list 7 × 9	Character List 7*9
1222											Character H (5 × 7 / 10 × 14)	Character all H5*7
1223											Character H (7 × 9 / 14 × 18)	Character all H7*9
1224											Character H (16 × 16 / 32 × 32)	Character all H16*16
1225											× / / 10 × 14)	onara coraccii i io i
1226											Corner & center character H (7 × 9 / 14 × 18)	
1227											Corner & center character H (16 × 16 / 32 × 32)	Chara Cor&Cen H16*16
1228											Chinese character "BI" (7 × 9 / 64 × 64)	Chara all Chinese
1229											Character "me" 18 × 18	Chara all me
1230											Character "me" 18 × 18 (VESA specifications)	Chara all me (VESA)
1231												
1232												
1233												
1234												
1235												
1236												
1237												
1238												
1239												
1240												

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	nc arity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1241										Crosshatch pattern	Cross Hatch
1242											
1243											
1244											
1245											
1246											
1247											
1248											
1249											
1250											
1251										H=20, V=20 dot pattern	Dot H=20,V=20
1252										H=60, V=60 dot pattern	Dot H=60,V=60
1253											
1254											
1255											
1256			•								
1257			·				_				
1258											
1259											
1260			·				_				

Program No.	Horizontal frequency [KHz]	Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	Syr pola	nc rity V	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1261										Edge marker pattern	Edge Marker
1262										Diagonal line pattern	Diagonal Line
1263										Center marker pattern	Center Marker
1264											
1265											
1266											
1267											
1268											
1269											
1270											
1271										Circle (Format 0)	Circle Format0
1272										Circle (Format 1)	Circle Format1
1273										Circle (Format 2)	Circle Format2
1274										Circle (Format 3)	Circle Format3
1275										Circle (Format 4)	Circle Format4
1276										Circle (Format 5)	Circle Format5
1277		-								Circle (Format 6)	Circle Format6
1278											
1279											
1280											

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	nc arity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1281										Burst L → R	Burst L->R
1282										Burst L ← R	Burst L<-R
1283										Burst $L \leftarrow C \rightarrow R$	Burst L<-C->R
1284										Burst $L \rightarrow C \leftarrow R$	Burst L->C<-R
1285										Burst T → B	Burst T->B
1286										Burst T ← B	Burst T<-B
1287										Burst $T \leftarrow C \rightarrow B$	Burst T<-C->B
1288										Burst T \rightarrow C \leftarrow B	Burst T->C<-B
1289											
1290											
1291											
1292											
1293											
1294											
1295											
1296											
1297											
1298											_
1299											
1300										_	_

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	pola	nc arity V	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1301	15.73	59.94	27.000	1440x487	Int	N	N	ANALOG	YPbPr	SD-SDI 487i@59.94	1 window	1 Window
1302	15.63	50.00	27.000	1440x576	Int	N	Ν	ANALOG	YPbPr	SD-SDI 576i@50	4 windows	4 Window
1303											9 windows	9 Window
1304											16 windows	16 Window
1305											25 windows	25 Window
1306											64 windows	64 Window
1307											3 windows, vertical direction	3 Window in V Row
1308											3 windows, horizontal direction	3 Window in H Row
1309											Window user position/center	User pos-Center
1310											Window user position/corner	User pos-Corner
1311	33.75	60.00	74.250	1920x1080	Int	Р	Р	HDTV1080	YPbPr	HD-SDI 1080@60i	Window scroll: Left	Window Scroll:Left
1312	33.72	59.94	74.176	1920x1080	Int	Р	Р	HDTV1080	YPbPr	HD-SDI 1080@59.94i	Window scroll: Right	Window Scroll:Right
1313	28.13	50.00	74.250	1920x1080	Int	Р	Р	HDTV1080	YPbPr	HD-SDI 1080@50i	Window scroll: Up	Window Scroll:Up
1314	33.75	60.00	74.250	1920x1080	Int	Р	Р	HDTV1080	YPbPr	HD-SDI 1080@30sf	Window scroll: Down	Window Scroll:Down
1315	33.72	59.94	74.176	1920x1080	Int	Р	Р	HDTV1080	YPbPr	HD-SDI 1080@29.97sf	Window scroll: Top left	Window Scroll:L Up
1316	28.13	50.00	74.250	1920x1080	Int	Р	Р	HDTV1080	YPbPr	HD-SDI 1080@25sf	Window scroll: Bottom left	Window Scroll:L Down
1317	27.00	48.00	74.250	1920x1080	Int	Р	Р	HDTV1080	YPbPr	HD-SDI 1080@24sf	Window scroll: Top right	Window Scroll:R Up
1318	26.97	47.96	74.176	1920x1080	Int	Р	Р	HDTV1080	YPbPr	HD-SDI 1080@23.98sf	Window scroll: Bottom right	Window Scroll:R Down
1319	45.00	60.00	74.250	1280x720	Prog	Р	Р	HDTV720	YPbPr	HD-SDI 720@60p	Window scroll L ⇔ R	Window Scroll:L<->R
1320	44.96	59.94	74.176	1280x720	Prog	Р	Р	HDTV720	YPbPr	HD-SDI 720@59.94p	Window scroll: Up ⇔ down	Window Scroll:Up<->D

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	pola	nc arity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1321	22.50	30.00	74.250	1280x720	Prog	Р	Р	HDTV720	YPbPr	HD-SDI 720@30p	Window scroll: Random	Window Scroll:Random
1322	22.48	29.97	74.176	1280x720	Prog	Р	Р	HDTV720	YPbPr	HD-SDI 720@29.97p	Window + monoscope	Window & Monoscope
1323	18.75	25.00	74.250	1280x720	Prog	Р	Р	HDTV720	YPbPr	HD-SDI 720@25p	Window: 2-3 pull-down	Window 2-3pull down
1324	18.00	24.00	74.250	1280x720	Prog	Р	Р	HDTV720	YPbPr	HD-SDI 720@24p	0% window	Window HV Size 0%
1325	17.98	23.98	74.176	1280x720	Prog	Р	Р	HDTV720	YPbPr	HD-SDI 720@23.98p	5% window	Window HV Size 5%
1326	37.50	50.00	74.250	1280x720	Prog	Р	Р	HDTV720	YPbPr	HD-SDI 720@50p	10% window	Window HV Size 10%
1327											20% window	Window HV Size 20%
1328											30% window	Window HV Size 30%
1329											40% window	Window HV Size 40%
1330											50% window	Window HV Size 50%
1331	67.50	60.00	148.500	1920x1080	Prog	Р	Р	HDTV1080	YPbPr	3G-A 60p YC422 10b	60% window	Window HV Size 60%
1332	67.43	59.94	148.352	1920x1080	Prog	Р	Р	HDTV1080	YPbPr	3G-A 59p YC422 10b	70% window	Window HV Size 70%
1333	33.75	60.00	74.250	1920x1080	Int	Р	Р	HDTV1080	YPbPr	3G-A 60i RGB 12b	80% window	Window HV Size 80%
1334	33.72	59.94	74.176	1920x1080	Int	Р	Р	HDTV1080	YPbPr	3G-A 59i RGB 12b	90% window	Window HV Size 90%
1335	33.75	60.00	74.250	1920x1080	Int	Р	Р	HDTV1080	YPbPr	3G-A 60i YC444 12b	100% window	Window HV Size 100%
1336	33.72	59.94	74.176	1920x1080	Int	Р	Р	HDTV1080	YPbPr	3G-A 59i YC444 12b	Window: Flicker 1 V	Window Flicker 1 V
1337	33.75	60.00	74.250	1920x1080	Int	Р	Р	HDTV1080	YPbPr	3G-A 60i YC422 12b	Window: Flicker 2 V	Window Flicker 2 V
1338	33.72	59.94	74.176	1920x1080	Int	Р	Р	HDTV1080	YPbPr	3G-A 59i YC422 12b	Window: Flicker 3 V	Window Flicker 3 V
1339	27.00	24.00	74.250	2048x1080	Prog	Р	Р	ANALOG	YPbPr	3G-A DCI RGB 12b	Window: Flicker 4 V	Window Flicker 4 V
1340	_		_								Window: Level Up	Window Auto Level

Program No.	Horizontal frequency [KHz]		Dot clock frequency [MHz]	No. of display dots (HxV)	Int / Prog	pola	nc arity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1341	67.50	60.00	148.500	1920x1080	Prog	Р	Р	HDTV1080	YPbPr	3G-B 60p YC422 10b	Bar: L → R	Moving Bar
1342	67.43	59.94	148.352	1920x1080	Prog	Р	Р	HDTV1080	YPbPr	3G-B 59p YC422 10b		
1343	33.75	60.00	74.250	1920x1080	Int	Р	Р	HDTV1080	YPbPr	3G-B 60i RGB 12b		
1344	33.72	59.94	74.176	1920x1080	Int	Р	Р	HDTV1080	YPbPr	3G-B 59i RGB 12b		
1345	33.75	60.00	74.250	1920x1080	Int	Р	Р	HDTV1080	YPbPr	3G-B 60i YC444 12b		
1346	33.72	59.94	74.176	1920x1080	Int	Р	Р	HDTV1080	YPbPr	3G-B 59i YC444 12b		
1347	33.75	60.00	74.250	1920x1080	Int	Р	Р	HDTV1080	YPbPr	3G-B 60i YC422 12b		
1348	33.72	59.94	74.176	1920x1080	Int	Р	Р	HDTV1080	YPbPr	3G-B 59i YC422 12b		
1349	27.00	24.00	74.250	2048x1080	Prog	Р	Р	ANALOG	RGB	3G-B DCI RGB 12b		
1350												
1351	67.50	60.00	148.500	1920x1080	Prog	Р	Р	HDTV1080	YPbPr	Dual 60p YC422 10b		
1352	67.43	59.94	148.352	1920x1080	Prog	Р	Р	HDTV1080	YPbPr	Dual 59p YC422 10b		
1353	33.75	60.00	74.250	1920x1080	Int	Р	Р	HDTV1080	YPbPr	Dual 60i RGB 12b		
1354	33.72	59.94	74.176	1920x1080	Int	Р	Р	HDTV1080	YPbPr	Dual 59i RGB 12b		
1355	33.75	60.00	74.250	1920x1080	Int	Р	Р	HDTV1080	YPbPr	Dual 60i YC444 12b		
1356	33.72	59.94	74.176	1920x1080	Int	Р	Р	HDTV1080	YPbPr	Dual 59i YC444 12b		
1357	33.75	60.00	74.250	1920x1080	Int	Р	Р	HDTV1080	YPbPr	Dual 60i YC422 12b		
1358	33.72	59.94	74.176	1920x1080	Int	Р	Р	HDTV1080	YPbPr	Dual 59i YC422 12b		
1359	27.00	24.00	74.250	2048x1080	Prog	Р	Р	HDTV720	YPbPr	Dual DCI RGB 12b		
1360												

Program No.	Horizontal frequency [KHz]		Dot clock frequency [MHz]	No. of display dots (HxV)	Int / Prog		nc arity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1361	56.25	50.00	148.500	1920x1080	Prog	Р	Р	HDTV1080	YPbPr	3G-A 50p YC422 10b		
1362	56.25	50.00	148.500	1920x1080	Prog	Р	Р	HDTV1080	YPbPr	3G-B 50p YC422 10b		
1363	56.25	50.00	148.500	1920x1080	Prog	Р	Р	HDTV1080	YPbPr	Dual 50p YC422 10b		

Program No.	Horizontal frequency [KHz]		Dot clock frequency [MHz]	No. of display dots (HxV)	Int / Prog	pol	nc arity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1381	135.00	60.00	594.000	3840x2160	Prog	Р	Р	HDTV1080	RGB	4K2K 3840x2160p60 s0		
1382	135.00	60.00	594.000	3840x2160	Prog	Р	Р	HDTV1080	RGB	4K2K 3840x2160p60 s1		
1383	135.00	60.00	594.000	3840x2160	Prog	Р	Р	HDTV1080	RGB	4K2K 3840x2160p60 s2		
1384	135.00	60.00	594.000	3840x2160	Prog	Р	Р	HDTV1080	RGB	4K2K 3840x2160p60 s3		
1385	270.00	120.00	1188.000	3840x2160	Prog	Р	Р	HDTV1080	RGB	4K2K 3840x2160p120s0		
1386	270.00	120.00	1188.000	3840x2160	Prog	Р	Р	HDTV1080	RGB	4K2K 3840x2160p120s1		
1387	270.00	120.00	1188.000	3840x2160	Prog	Р	Р	HDTV1080	RGB	4K2K 3840x2160p120s2		
1388	270.00	120.00	1188.000	3840x2160	Prog	Р	Р	HDTV1080	RGB	4K2K 3840x2160p120s3		
1389												
1390												
1391												
1392												
1393												
1394												
1395												
1396												
1397												
1398												
1399												
1400												

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	nola		SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1401	31.47	59.94	27.000	720 × 483	Prog	N	Ν	ANALOG	YPbPr	NTSC PROG.	256-block color	256-Color Block
1402	31.47	59.94	27.000	720 × 483	Prog	N	Ν	ANALOG	YPbPr	NTSC PROG. W	64-gradation block gray (white → black)	64Gray Block White->
1403	31.47	59.94	27.000	720 × 483	Prog	Ν	Ν	ANALOG	YPbPr	NTSC PROG. LB	64-gradation block gray (black → white)	64Gray Block Black->
1404	33.72	59.94	74.176	1920 × 1080	Int	Р	Р	HDTV1080	YPbPr	1920 × 1080@59.94i	8 color bars & 16 gray scale	8-Color & 16-Gray
1405	33.75	60.00	74.250	1920 × 1080	Int	Р	Р	HDTV1080	YPbPr	1920 × 1080@60i	Gray scale & crosshatch	Gray & Cross Hatch
1406	67.43	59.94	148.352	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	1920 × 1080@59.94p	Color bar & crosshatch	Color & Cross Hatch
1407	67.50	60.00	148.500	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	1920 × 1080@60p	Color temperature	Color Temperature
1408	44.96	59.94	74.176	1280 × 720	Prog	Р	Р	HDTV720	YPbPr	1280 × 720@59.94p	Pairing	Pairing
1409	45.00	60.00	74.250	1280 × 720	Prog	Р	Р	HDTV720	YPbPr	1280 × 720@60p	Crosshatch & circle & gray	Cross&Circle&Gray
1410	15.73	59.94	13.500	712 × 484	Int	N	N	NTSC	YPbPr	NTSC-J 4:3	Crosshatch & circle & color bar & character	Cross&Circle&Color&H
1411											Circle & line	Circle & Line
1412											Character edge (H)	H-Character Line
1413											Character edge (O)	O-Character Line
1414											Crosstalk (width 90%)	Cross Talk W=90%
1415											Sine wave scroll	Sign Wave Scroll
1416	31.25	50.00	27.000	720 × 576	Prog	N	Ν	ANALOG	YPbPr	PAL PROG.	10 steps & 1/10 MHz	1/10 MHz × 10step
1417	31.25	50.00	27.000	720 × 576	Prog	N	Ν	ANALOG	YPbPr	PAL PROG. W	Gamma correction ramp wγ = 2.5	Gamma Ramp wr=2.5
1418	31.25	50.00	27.000	720 × 576	Prog	N	N	ANALOG	YPbPr	PAL PROG. LB	Gamma correction ramp γ = 2.0	Gamma Ramp r=2.0
1419	28.13	50.00	74.250	1920 × 1080	Int	Р	Р	HDTV1080	YPbPr	1920 × 1080@50i	Gamma correction ramp γ = 0.5	Gamma Ramp r=0.5
1420	56.25	50.00	148.500	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	1920 × 1080@50p	SMPTE RP-27.1	SMPTE RP-27.1

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	pola	nc arity V	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1421	37.50	50.00	74.250	1280 × 720	Prog	Р	Р	HDTV720	YPbPr	1280 × 720@50p	ITC pattern 9 windows	ITC 9-Window
1422	15.63	50.00	13.500	702 × 574	Int	Ν	Ν	PAL	YPbPr	PAL 4:3	ITC pattern crosshatch & marker	ITC Cross & Marker
1423											ITC pattern H character	ITC H-Character
1424											64 gray + RGBW color bars superimposed	64-Gray & RGBW-Color
1425											Gray scale + circle	Gray & Circle
1426	33.72	29.97	74.176	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	1920 × 1080@29.97p	Corner & center point marker	Corner&Center Marker
1427	33.75	30.00	74.250	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	1920 × 1080@30p	Crosstalk (width 60%)	Cross Talk W=60%
1428	26.97	23.98	74.176	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	1920 × 1080@23.98p	Song of Youth	SpeakerCheck / Youth
1429	27.00	24.00	74.250	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	1920 × 1080@24p	Crosshatch & marker	Cross & Marker 1
1430	28.13	25.00	74.250	1920 × 1080	Prog	Р	Р	HDTV1080	YPbPr	1920 × 1080@25p	256-color block color "Color" letters	256-Color <color></color>
1431	33.72	59.94	74.176	1920 × 1080	Int	Р	Р	HDTV1080	YPbPr	1920 × 1080@29.97sf	Random 256-color color bar	256-Color Random
1432	33.75	60.00	74.250	1920 × 1080	Int	Р	Р	HDTV1080	YPbPr	1920 × 1080@30sf	256-step gray scale & 7 color bars	256-Gray & 7-Color
1433	26.97	47.96	74.176	1920 × 1080	Int	Р	Р	HDTV1080	YPbPr	1920 × 1080@23.98sf	Center, corner window & edge marker	Corner&Center Window
1434	27.00	48.00	74.250	1920 × 1080	Int	Р	Р	HDTV1080	YPbPr	1920 × 1080@24sf	3-step gray scale window	3gray-Window
1435	28.13	50.00	74.250	1920 × 1080	Int	Р	Р	HDTV1080	YPbPr	1920 × 1080@25sf	19 × 15 crosshatch & marker	Cross & Marker 2
1436	22.48	29.97	74.176	1280 × 720	Prog	Р	Р	HDTV720	YPbPr	1280 × 720@29.97p	Crosshatch & circle	Circle & Cross Hatch
1437	22.50	30.00	74.250	1280 × 720	Prog	Р	Р	HDTV720	YPbPr	1280 × 720@30p	Checkerboard & window	1dotChecker & Window
1438	17.98	23.98	74.176	1280 × 720	Prog	Р	Р	HDTV720	YPbPr	1280 × 720@23.98p	ANSI pattern (Setup)	ANSI Setup
1439	18.00	24.00	74.250	1280 × 720	Prog	Р	Р	HDTV720	YPbPr	1280 × 720@24p	ANSI pattern (Contrast)	ANSI Contrast
1440	18.75	25.00	74.250	1280 × 720	Prog	Р	Р	HDTV720	YPbPr	1280 × 720@25p	ANSI pattern (9Point)	ANSI 9-Point

Program No.	Horizontal frequency [KHz]		Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	pola		SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1441						Н	V				ANSI pattern (Hor Reso)	ANSI H-Resolution
											, , , ,	
1442											, , ,	ANSI V-Resolution
1443											Gamma correction ramp $\gamma = 2.2$	Gamma Ramp r=2.2
1444											Gamma correction ramp γ = 0.45	Gamma Ramp r=0.45
1445											Limited ramp in horizontal direction	
1446											Limited ramp in vertical direction	
1447												
1448												
1449												
1450												
1451	33.72	59.94	74.176	1920 × 1035	Int	Р	Р	HDTV1080	YPbPr	1920 × 1035@59.94i		
1452	33.75	60.00	74.250	1920 × 1035	Int	Р	Р	HDTV1080	YPbPr	1920 × 1035@60i		
1453	31.25	50.00	74.250	1920 × 1080	Int	Ν	N	HDTV1250	YPbPr	SMPTE295Mi		
1454	62.50	50.00	148.500	1920 × 1080	Prog	Ν	N	HDTV1250	YPbPr	SMPTE295Mp		
1455	31.25	50.00	48.000	1280 × 1152	Int	Р	Р	HDTV1152 (AUS)	YPbPr	AUS 1152i		
1456	31.25	50.00	72.000	1920 × 1080	Int	Р	Ν	HDTV1250 (AUS)	YPbPr	AUS 1080i		
1457												
1458												
1459												
1460												

^{*} Program numbers 1461 to 1480 are not registered.

Program No.	Horizontal frequency [KHz]	Dot clock frequency [MHz]	No. of display dots (HxV)	Int / Prog	Syr pola H	rity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1481										Motion blur 1	Motion Blur1
1482										Motion blur 2	Motion Blur2
1483										Motion blur 3	Motion Blur3
1484										Motion blur 4	Motion Blur4
1485										Motion blur 5	Motion Blur5
1486										Motion blur 6	Motion Blur6
1487										Motion blur 7	Motion Blur7
1488										Motion blur 8	Motion Blur8
1489										Motion blur 9	Motion Blur9
1490										Motion blur 10	Motion Blur10
1491										Motion blur 11	Motion Blur11
1492										Motion blur 12	Motion Blur12
1493											
1494											
1495											
1496											
1497											
1498											
1499											
1500											

Program No.	Horizontal frequency [KHz]		Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	pola	nc arity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1501	15.73	59.94	13.500	712 × 484	Int	N	Ν	NTSC	YPbPr	NTSC-J 4:3	Timing data	Timing Data
1502	15.73	59.94	13.500	712 × 484	Int	N	Ν	NTSC	YPbPr	NTSC-J 16:9		
1503	15.73	59.94	13.500	712 × 484	Int	N	Ν	NTSC	YPbPr	NTSC-J LB		
1504	15.63	50.00	13.500	702 × 574	Int	N	Ν	PAL	YPbPr	PAL 4:3		
1505	15.63	50.00	13.500	702 × 574	Int	Ν	Ν	PAL	YPbPr	PAL 16:9		
1506	15.63	50.00	13.500	702 × 574	Int	Ν	Ν	PAL	YPbPr	PAL LB		
1507	15.63	50.00	13.500	702 × 574	Int	N	Ν	SECAM	YPbPr	SECAM 4:3		
1508	15.63	50.00	13.500	702 × 574	Int	N	Ν	SECAM	YPbPr	SECAM 16:9		
1509	15.63	50.00	13.500	702 × 574	Int	Ν	Ν	SECAM	YPbPr	SECAM LB		
1510	15.73	59.94	13.500	712 × 484	Int	N	Ν	NTSC-M	YPbPr	NTSC-M		
1511	15.73	59.94	13.500	712 × 484	Int	N	Ν	NTSC-443	YPbPr	NTSC-443		HDCP On Screen
1512	15.73	59.94	13.500	712 × 484	Int	N	Ν	PAL-M	YPbPr	PAL-M		
1513	15.73	59.94	13.500	712 × 484	Int	N	Ν	PAL-60	YPbPr	PAL-60		
1514	15.63	50.00	13.500	718 × 572	Int	Ν	Ν	PAL-N	YPbPr	PAL-N		
1515	15.63	50.00	13.500	702 × 574	Int	N	N	PAL-Nc	YPbPr	PAL-Nc		
1516					_							
1517												
1518												
1519												
1520												

Program No.	Horizontal frequency [KHz]		Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	pol	nc arity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1521	15.73	59.94	13.500	712 × 484	Int	N	N	NTSC-M	YPbPr	Closed Caption CC1		HDMI Packet Data
1522	15.73	59.94	13.500	712 × 484	Int	N	Ν	NTSC-M	YPbPr	Closed Caption CC2		
1523	15.73	59.94	13.500	712 × 484	Int	N	Ν	NTSC-M	YPbPr	Closed Caption Text1		
1524	15.73	59.94	13.500	712 × 484	Int	N	Ν	NTSC-M	YPbPr	Closed Caption Text2		
1525	15.73	59.94	13.500	712 × 484	Int	N	Ν	NTSC-M	YPbPr	V Chip MPAA G		
1526	15.73	59.94	13.500	712 × 484	Int	Ν	Ν	NTSC-M	YPbPr	V Chip MPAA X		
1527	15.73	59.94	13.500	712 × 484	Int	N	Ν	NTSC-M	YPbPr	V Chip US TV-Y		
1528	15.73	59.94	13.500	712 × 484	Int	N	Ν	NTSC-M	YPbPr	V Chip US TV-MA-VSL		
1529												
1530												
1531	15.63	50.00	13.500	702 × 574	Int	N	Ν	PAL	YPbPr	PAL TELETEXT	EDID pattern DVI-1	EDID DVI1
1532											EDID pattern DVI-1 (HEX)	EDID DVI1 (HEX)
1533											EDID pattern DVI-2	EDID DVI2
1534											EDID pattern DVI-2 (HEX)	EDID DVI2 (HEX)
1535											EDID pattern HDMI1	EDID HDMI1
1536											EDID pattern HDMI1 (HEX)	EDID HDMI1 (HEX)
1537		_									EDID pattern HDMI2	EDID HDMI2
1538											EDID pattern HDMI2 (HEX)	EDID HDMI2 (HEX)
1539											EDID pattern PC-DVI	EDID PC-DVI
1540											EDID pattern PC-DVI (HEX)	EDID PC-DVI (HEX)

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	pol	nc arity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1541	15.73	59.94	13.500	712 × 484	Int	N	N	NTSC	YPbPr	Mac NTSC-J DVD Type1	EDID pattern PC-VGA	EDID PC-VGA
1542	15.73	59.94	13.500	712 × 484	Int	N	Ν	NTSC	YPbPr	Mac NTSC-J DVD Type2	EDID pattern PC-VGA (HEX)	EDID PC-VGA (HEX)
1543	15.73	59.94	13.500	712 × 484	Int	N	Ν	NTSC	YPbPr	Mac NTSC-J DVD Type3	EDID pattern TV-VGA	EDID TV-VGA
1544	15.63	50.00	13.500	702 × 574	Int	N	Ν	PAL	YPbPr	Mac PAL DVD	EDID pattern TV-VGA (HEX)	EDID TV-VGA (HEX)
1545												
1546												
1547												
1548												
1549												
1550												
1551	15.63	50.00	13.500	702 × 574	Int	Ν	Ν	PAL	YPbPr	SCART PAL VBS 4:3		
1552	15.63	50.00	13.500	702 × 574	Int	N	Ν	PAL	YPbPr	SCART PAL Y/C 4:3		
1553	15.63	50.00	13.500	702 × 574	Int	Ν	Ν	PAL	YPbPr	SCART PAL RGB 4:3		
1554	15.63	50.00	13.500	702 × 574	Int	Ν	Ν	PAL	YPbPr	SCART PAL VBS 16:9		
1555	15.63	50.00	13.500	702 × 574	Int	N	Ν	PAL	YPbPr	SCART PAL TELETEXT		
1556												
1557												
1558												
1559												
1560												

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	Sy pola H	rity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1561											DDC/Clpattern DVI-1 L-0	DDC/CI DVI1 L-0
1562											DDC/CI pattern DVI-1 L-100	DDC/CI DVI1 L-100
1563											DDC/CI pattern DVI-1 L-200	DDC/CI DVI1 L-200
1564											DDC/CI pattern DVI-2 L-0	DDC/CI DVI2 L-0
1565											DDC/CI pattern DVI-2 L-100	DDC/CI DVI2 L-100
1566											DDC/CI pattern DVI-2 L-200	DDC/CI DVI2 L-200
1567											DDC/CI pattern HDMI1 L-0	DDC/CI HDMI1 L-0
1568											DDC/CI pattern HDMI1 L-100	DDC/CI HDMI1 L-100
1569											DDC/CI pattern HDMI1 L-200	DDC/CI HDMI1 L-200
1570											DDC/CI pattern HDMI2 L-0	DDC/CI HDMI2 L-0
1571											DDC/CI pattern HDMI2 L-100	DDC/CI HDMI2 L-100
1572											DDC/CI pattern HDMI2 L-200	DDC/CI HDMI2 L-200
1573											DDC/CI pattern PC-DVI L-0	DDC/CI pcDVI L-0
1574											DDC/CI pattern PC-DVI L-100	DDC/CI pcDVI L-100
1575											DDC/CI pattern PC-DVI L-200	DDC/CI pcDVI L-200
1576											DDC/CI pattern PC-VGA L-0	DDC/CI pcVGA L-0
1577											DDC/CI pattern PC-VGA L-100	DDC/CI pcVGA L-100
1578											DDC/CI pattern PC-VGA L-200	DDC/CI pcVGA L-200
1579											DDC/CI pattern TV-VGA L-0	DDC/CI tvVGA L-0
1580											DDC/CI pattern TV-VGA L-100	DDC/CI tvVGA L-100
1581											DDC/CI pattern TV-VGA L-200	DDC/CI tvVGA L-200

^{*} Program numbers 1582 to 1600 are not registered.

Program No.	Horizontal frequency [KHz]		Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	pola	nc arity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1601	37.86	85.08	31.500	640 × 350	Prog	Р	N	ANALOG	RGB	VESA640 × 350@85		
1602	37.86	85.08	31.500	640 × 400	Prog	N	Р	ANALOG	RGB	VESA640 × 400@85		
1603	37.93	85.04	35.500	720 × 400	Prog	N	Р	ANALOG	RGB	VESA720 × 400@85		
1604	31.47	59.94	25.175	640 × 480	Prog	N	Ν	ANALOG	RGB	VESA640 × 480@60		
1605	37.86	72.81	31.500	640 × 480	Prog	N	Ν	ANALOG	RGB	VESA640 × 480@72		
1606	37.50	75.00	31.500	640 × 480	Prog	N	Ν	ANALOG	RGB	VESA640 × 480@75		
1607	43.27	85.01	36.000	640 × 480	Prog	N	Ν	ANALOG	RGB	VESA640 × 480@85		
1608	35.16	56.25	36.000	800 × 600	Prog	Р	Р	ANALOG	RGB	VESA800 × 600@56		
1609	37.88	60.32	40.000	800 × 600	Prog	Р	Р	ANALOG	RGB	VESA800 × 600@60		
1610	48.08	72.19	50.000	800 × 600	Prog	Р	Р	ANALOG	RGB	VESA800 × 600@72		
1611	46.88	75.00	49.500	800 × 600	Prog	Р	Р	ANALOG	RGB	VESA800 × 600@75		
1612	53.67	85.06	56.250	800 × 600	Prog	Р	Р	ANALOG	RGB	VESA800 × 600@85		
1613	76.30	119.97	73.250	800 × 600	Prog	Р	Ν	ANALOG	RGB	VESA800 × 600@120CVT		
1614	31.02	60.00	33.750	848 × 480	Prog	Р	Р	ANALOG	RGB	VESA848 × 480@60		
1615	35.52	86.96	44.900	1024 × 768	Int	Р	Р	ANALOG	RGB	VESA1024 × 768@43		
1616	48.36	60.00	65.000	1024 × 768	Prog	Ν	Ν	ANALOG	RGB	VESA1024 × 768@60		
1617	56.48	70.07	75.000	1024 × 768	Prog	N	Ν	ANALOG	RGB	VESA1024 × 768@70		
1618	60.02	75.03	78.750	1024 × 768	Prog	Р	Р	ANALOG	RGB	VESA1024 × 768@75		
1619	68.68	85.00	94.500	1024 × 768	Prog	Р	Р	ANALOG	RGB	VESA1024 × 768@85		
1620	97.55	119.99	115.500	1024 × 768	Prog	Р	N	ANALOG	RGB	VESA1024 × 768@120CVT		

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	pola	nc arity V	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1621	67.50	75.00	108.000	1152 × 864	Prog	Р	Р	ANALOG	RGB	VESA1152 × 864@75	CEC pattern HDMI1 Standby	CEC HDMI1 Standby
1622	47.40	59.99	68.250	1280 × 768	Prog	Р	Ν	ANALOG	RGB	VESA1280 × 768@60	CEC pattern HDMI1 Im View On	CEC HDMI1 Im View On
1623	47.78	59.87	79.500	1280 × 768	Prog	N	Р	ANALOG	RGB	VESA1280 × 768@60	CEC pattern HDMI1 Set OSD Nm	CEC HDMI1 Set OSD Nm
1624	60.29	74.89	102.250	1280 × 768	Prog	Ν	Р	ANALOG	RGB	VESA1280 × 768@75	CEC pattern HDMI2 Standby	CEC HDMI2 Standby
1625	68.63	84.84	117.500	1280 × 768	Prog	N	Р	ANALOG	RGB	VESA1280 × 768@85	CEC pattern HDMI2 Im View On	CEC HDMI2 Im View On
1626	97.40	119.80	140.250	1280 × 768	Prog	Р	Ν	ANALOG	RGB	VESA1280 × 768@120CVT	CEC pattern HDMI2 Set OSD Nm	CEC HDMI2 Set OSD Nm
1627	49.31	59.91	71.000	1280 × 800	Prog	Р	Ν	ANALOG	RGB	VESA1280 × 800@60CVT		
1628	49.70	59.81	83.500	1280 × 800	Prog	N	Р	ANALOG	RGB	VESA1280 × 800@60		
1629	62.79	74.93	106.500	1280 × 800	Prog	N	Р	ANALOG	RGB	VESA1280 × 800@75		
1630	71.55	84.88	122.500	1280 × 800	Prog	Ν	Р	ANALOG	RGB	VESA1280 × 800@85		
1631	101.56	119.91	146.250	1280 × 800	Prog	Р	N	ANALOG	RGB	VESA1280 × 800@120CVT		
1632	60.00	60.00	108.000	1280 × 960	Prog	Р	Р	ANALOG	RGB	VESA1280 × 960@60		
1633	85.94	85.00	148.500	1280 × 960	Prog	Р	Р	ANALOG	RGB	VESA1280 × 960@85		
1634	121.88	119.84	175.500	1280 × 960	Prog	Р	Ν	ANALOG	RGB	VESA1280 × 960@120CVT		
1635	63.98	60.02	108.000	1280 × 1024	Prog	Р	Р	ANALOG	RGB	VESA1280 × 1024@60		
1636	79.98	75.02	135.000	1280 × 1024	Prog	Р	Р	ANALOG	RGB	VESA1280 × 1024@75		
1637	91.15	85.02	157.500	1280 × 1024	Prog	Р	Р	ANALOG	RGB	VESA1280 × 1024@85		
1638	130.03	119.96	187.250	1280 × 1024	Prog	Р	N	ANALOG	RGB	VESA1280 × 1024@120CVT		
1639	47.71	60.02	85.500	1360 × 768	Prog	Р	Р	ANALOG	RGB	VESA1360 × 768@60		
1640	97.53	119.97	148.250	1360 × 768	Prog	Р	N	ANALOG	RGB	VESA1360 × 768@120CVT		

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	pola	nc arity V	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1641	64.74	59.95	101.000	1400 × 1050	Prog	Р	N	ANALOG	RGB	VESA1400 × 1050@60		
1642	65.32	59.98	121.750	1400 × 1050	Prog	N	Р	ANALOG	RGB	VESA1400 × 1050@60		
1643	82.28	74.87	156.000	1400 × 1050	Prog	N	Р	ANALOG	RGB	VESA1400 × 1050@75		
1644	93.88	84.96	179.500	1400 × 1050	Prog	N	Р	ANALOG	RGB	VESA1400 × 1050@85		
1645	133.33	119.90	208.000	1400 × 1050	Prog	Р	N	ANALOG	RGB	VESA1400 × 1050@120CVT		
1646	55.47	59.90	88.750	1440 × 900	Prog	Р	N	ANALOG	RGB	VESA1440 × 900@60CVT		
1647	55.93	59.89	106.500	1440 × 900	Prog	Р	Ν	ANALOG	RGB	VESA1440 × 900@60		
1648	70.64	74.98	136.750	1440 × 900	Prog	Ν	Р	ANALOG	RGB	VESA1440 × 900@75		
1649	80.43	84.84	157.000	1440 × 900	Prog	Ν	Р	ANALOG	RGB	VESA1440 × 900@85		
1650	114.22	119.85	182.750	1440 × 900	Prog	Р	Ν	ANALOG	RGB	VESA1440 × 900@120CVT		
1651	75.00	60.00	162.000	1600 × 1200	Prog	Р	Р	ANALOG	RGB	VESA1600 × 1200@60		
1652	81.25	65.00	175.500	1600 × 1200	Prog	Р	Р	ANALOG	RGB	VESA1600 × 1200@65		
1653	87.50	70.00	189.000	1600 × 1200	Prog	Р	Р	ANALOG	RGB	VESA1600 × 1200@70		
1654	93.75	75.00	202.500	1600 × 1200	Prog	Р	Р	ANALOG	RGB	VESA1600 × 1200@75		
1655	106.25	85.00	229.500	1600 × 1200	Prog	Р	Р	ANALOG	RGB	VESA1600 × 1200@85		
1656	152.41	119.92	268.250	1600 × 1200	Prog	Р	N	ANALOG	RGB	VESA1600 × 1200@120CVT		
1657	64.67	59.88	119.000	1680 × 1050	Prog	Р	N	ANALOG	RGB	VESA1680 × 1050@60CVT		
1658	65.29	59.95	146.250	1680 × 1050	Prog	N	Р	ANALOG	RGB	VESA1680 × 1050@60		
1659	82.31	74.89	187.000	1680 × 1050	Prog	N	Р	ANALOG	RGB	VESA1680 × 1050@75		
1660	93.86	84.94	214.750	1680 × 1050	Prog	N	Р	ANALOG	RGB	VESA1680 × 1050@85		

Program No.	Horizontal frequency [KHz]		Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	nois	nc arity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1661	133.42	119.99	245.500	1680 × 1050	Prog	Р	Ν	ANALOG	RGB	VESA1680 × 1050@120CVT		
1662	83.64	60.00	204.750	1792 × 1344	Prog	Z	Р	ANALOG	RGB	VESA1792 × 1344@60		
1663	106.27	75.00	261.000	1792 × 1344	Prog	Ν	Р	ANALOG	RGB	VESA1792 × 1344@75		
1664	170.72	119.97	333.250	1792 × 1344	Prog	Р	N	ANALOG	RGB	VESA1792 × 1344@120CVT		
1665	86.33	60.00	218.250	1856 × 1392	Prog	Z	Р	ANALOG	RGB	VESA1856 × 1392@60		
1666	112.50	75.00	288.000	1856 × 1392	Prog	Ν	Р	ANALOG	RGB	VESA1856 × 1392@75		
1667												
1668	74.04	59.95	154.000	1920 × 1200	Prog	Р	Ν	ANALOG	RGB	VESA1920 × 1200@60		
1669	74.56	59.88	193.250	1920 × 1200	Prog	Ν	Р	ANALOG	RGB	VESA1920 × 1200@60		
1670	94.04	74.93	245.250	1920 × 1200	Prog	Ν	Р	ANALOG	RGB	VESA1920 × 1200@75		
1671	107.18	84.93	281.250	1920 × 1200	Prog	N	Р	ANALOG	RGB	VESA1920 × 1200@85		
1672	152.40	119.91	317.000	1920 × 1200	Prog	Р	N	ANALOG	RGB	VESA1920 × 1200@120CVT		
1673	90.00	60.00	234.000	1920 × 1440	Prog	Ν	Р	ANALOG	RGB	VESA1920 × 1440@60		
1674	112.50	75.00	297.000	1920 × 1440	Prog	Z	Р	ANALOG	RGB	VESA1920 × 1440@75		
1675												
1676	98.71	59.97	268.500	2560 × 1600	Prog	Р	N	ANALOG	RGB	VESA2560 × 1600@60CVT		
1677	47.71	59.79	85.500	1366 × 768	Prog	Ρ	Р	ANALOG	RGB	VESA1366 × 768@60		
1678	45.00	60.00	74.250	1280x720	Prog	Р	Р	ANALOG	RGB	VESA1280x720@60		
1679	48.00	60.00	72.000	1366x768	Prog	Р	Р	ANALOG	RGB	VESA1366x768@60		
1680	60.00	60.00	108.000	1600x900	Prog	Р	Р	ANALOG	RGB	VESA1600x900@60		

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (HxV)	Int / Prog		ic rity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1681	67.50	60.00	148.50	1920x1080	Prog	Р	Р	ANALOG	RGB	VESA1920x1080@60		
1682	72.00	60.00	162.00		Prog		Р	ANALOG	RGB	VESA2048x1152@60		
1683												
1684												
1685												
1686												
1687												
1688												
1689												
1690												
1691												
1692												
1693												
1694												
1695												
1696												
1697												
1698												
1699												
1700												

^{*} Program numbers 1701 to 1800 are not registered.

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (HxV)	Int / Prog	pola	nc arity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1801	134.87	59.94	296.704	1920x2205	Prog	Р	Р	ANALOG	YPbPr	3D 1080p60 FramePack		
1802	112.50	50.00	297.000	1920x2205	Prog	Р	Р	ANALOG	YPbPr	3D 1080p50 FramePack		
1803	53.95	23.98	148.352	1920x2205	Prog	Р	Р	ANALOG	YPbPr	3D 1080p24 FramePack		
1804	67.43	29.97	148.352	1920x2228	Prog	Р	Р	ANALOG	YPbPr	3D 1080i60 FramePack		
1805	56.25	25.00	148.500	1920x2228	Prog	Р	Р	ANALOG	YPbPr	3D 1080i50 FramePack		
1806	89.91	59.94	148.352	1280x1470	Prog	Р	Р	ANALOG	YPbPr	3D 720p60 FramePack		
1807	75.00	50.00	148.500	1280x1470	Prog	Р	Р	ANALOG	YPbPr	3D 720p50 FramePack		
1808	62.94	59.94	54.000	720x1005	Prog	N	Ν	ANALOG	YPbPr	3D 480p60 FramePack		
1809	62.50	50.00	54.000	720x1201	Prog	Ν	Ν	ANALOG	YPbPr	3D 576p50 FramePack		
1810	31.47	29.97	54.000	1440x1028	Prog	Ν	Z	ANALOG	YPbPr	3D 480i60 FramePack		
1811	31.25	25.00	54.000	1440x1226	Prog	Ν	Z	ANALOG	YPbPr	3D 576i50 FramePack		
1812	62.94	59.94	50.350	640x1005	Prog	Ν	Z	ANALOG	RGB	3D VGAp60 FramePack		
1813	67.43	59.94	148.352	1920x2206	Int	Р	Р	ANALOG	YPbPr	3D 1080i60 FieldAlte		
1814	56.25	50.00	148.500	1920x2206	Int	Р	Р	ANALOG	YPbPr	3D 1080i50 FieldAlte		
1815	31.47	59.94	54.000	1440x1006	Int	N	Ν	ANALOG	YPbPr	3D 480i60 FieldAlte		
1816	31.25	50.00	54.000	1440x1202	Int	Ν	Ν	ANALOG	YPbPr	3D 576i50 FieldAlte		
1817	134.87	59.94	296.704	1920x2160	Prog	Р	Р	ANALOG	YPbPr	3D 1080p60 LineAlter		
1818	112.50	50.00	297.000	1920x2160	Prog	Р	Р	ANALOG	YPbPr	3D 1080p50 LineAlter		
1819	53.95	23.98	148.352	1920x2160	Prog	Р	Р	ANALOG	YPbPr	3D 1080p24 LineAlter		
1820	89.91	59.94	148.352	1280x1440	Prog	Р	Р	ANALOG	YPbPr	3D 720p60 LineAlter		

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (HxV)	Int / Prog	pola	nc arity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1821	75.00	50.00	148.500	1280x1440	Prog	Р	Р	ANALOG	YPbPr	3D 720p50 LineAlter	CEC pattern HDMI1 Standby	CEC HDMI1 Standby
1822	62.94	59.94	54.000	720x960	Prog	N	N	ANALOG	YPbPr	3D 480p60 LineAlter	CEC pattern HDMI1 Im View On	CEC HDMI1 Im View On
1823	62.50	50.00	54.000	720x1152	Prog	N	N	ANALOG	YPbPr	3D 576p50 LineAlter	CEC pattern HDMI1 Set OSD Nm	CEC HDMI1 Set OSD Nm
1824	62.94	59.94	50.350	640x960	Prog	Ν	Ν	ANALOG	RGB	3D VGAp60 LineAlter	CEC pattern HDMI2 Standby	CEC HDMI2 Standby
1825	67.43	59.94	296.704	3840x1080	Prog	Р	Р	ANALOG	YPbPr	3D 1080p60 Side_full	CEC pattern HDMI2 Im View On	CEC HDMI2 Im View On
1826	56.25	50.00	297.000	3840x1080	Prog	Р	Р	ANALOG	YPbPr	3D 1080p50 Side_full	CEC pattern HDMI2 Set OSD Nm	CEC HDMI2 Set OSD Nm
1827	26.97	23.98	148.352	3840x1080	Prog	Р	Р	ANALOG	YPbPr	3D 1080p24 Side_full		
1828	33.72	59.94	148.352	3840x1080	Int	Р	Р	ANALOG	YPbPr	3D 1080i60 Side_full		
1829	28.13	50.00	148.500	3840x1080	Int	Р	Р	ANALOG	YPbPr	3D 1080i50 Side_full		
1830	44.96	59.94	148.352	2560x720	Prog	Р	Р	ANALOG	YPbPr	3D 720p60 Side_full		
1831	37.50	50.00	148.500	2560x720	Prog	Р	Р	ANALOG	YPbPr	3D 720p50 Side_full		
1832	31.47	59.94	54.000	1440x480	Prog	Ν	Ν	ANALOG	YPbPr	3D 480p60 Side_full		
1833	31.25	50.00	54.000	1440x576	Prog	Ν	Ν	ANALOG	YPbPr	3D 576p50 Side_full		
1834	15.73	59.94	54.000	2880x480	Int	Ν	Ν	ANALOG	YPbPr	3D 480i60 Side_full		
1835	15.63	50.00	54.000	2880x576	Int	Ν	Ν	ANALOG	YPbPr	3D 576i50 Side_full		
1836	31.47	59.94	50.350	1280x480	Prog	N	Ν	ANALOG	RGB	3D VGAp60 Side_full		
1837	67.43	59.94	148.352	1920x1080	Prog	Р	Р	ANALOG	YPbPr	3D 1080p60 Side_half		
1838	56.25	50.00	148.500	1920x1080	Prog	Р	Р	ANALOG	YPbPr	3D 1080p50 Side_half		
1839	26.97	23.98	74.176	1920x1080	Prog	Р	Р	ANALOG	YPbPr	3D 1080p24 Side_half		
1840	33.72	59.94	74.176	1920x1080	Int	Р	Р	ANALOG	YPbPr	3D 1080i60 Side_half		

Program No.	Horizontal frequency [KHz]		Dot clock frequency [MHz]	No. of display dots (HxV)	Int / Prog	Sylpola Pola		SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1841	28.13	50.00	74.250	1920x1080	Int	Р	Р	ANALOG	YPbPr	3D 1080i50 Side_half		
1842	44.96	59.94	74.176	1280x720	Prog	Р	Р	ANALOG	YPbPr	3D 720p60 Side_half		
1843	37.50	50.00	74.250	1280x720	Prog	Р	Р	ANALOG	YPbPr	3D 720p50 Side_half		
1844	31.47	59.94	27.000	720x480	Prog	Ν	N	ANALOG	YPbPr	3D 480p60 Side_half		
1845	31.25	50.00	27.000	720x576	Prog	Z	Ν	ANALOG	YPbPr	3D 576p50 Side_half		
1846	15.73	59.94	27.000	1440x480	Int	Ζ	N	ANALOG	YPbPr	3D 480i60 Side_half		
1847	15.63	50.00	27.000	1440x576	Int	Ν	Ν	ANALOG	YPbPr	3D 576i50 Side_half		
1848	31.47	59.94	25.175	640x480	Prog	Ζ	N	ANALOG	RGB	3D VGAp60 Side_half		
1849												

Note: The 3D timing for sampling timing program numbers 1801 to 1848 contain programs which are not stipulated in HDMI Specification Ver.1.4.

Sample timing may be changed in the future by updates of the specification sheets or other means. In terms of the current Vblank3 period for field alternative, DE is HIGH. Specifications are subject to change in the future.

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	pola	nc arity V	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1850	37.86	85.08	31.500	640 × 400	Prog	N	Р	ANALOG	RGB	VESA400-85		
1851	37.86	72.81	31.500	640 × 480	Prog	Ν	Ν	ANALOG	RGB	VESA480-72		
1852	37.50	75.00	31.500	640 × 480	Prog	Ν	Ν	ANALOG	RGB	VESA480-75		
1853	35.16	56.25	36.000	800 × 600	Prog	Р	Р	ANALOG	RGB	VESA600-56		
1854	37.88	60.32	40.000	800 × 600	Prog	Р	Р	ANALOG	RGB	VESA600-60		
1855	48.08	72.19	50.000	800 × 600	Prog	Р	Р	ANALOG	RGB	VESA600-72		
1856	48.36	60.00	65.000	1024 × 768	Prog	N	Ν	ANALOG	RGB	VESA768-60		
1857	56.48	70.07	75.000	1024 × 768	Prog	N	Ν	ANALOG	RGB	VESA768-70		
1858	60.02	75.03	78.750	1024 × 768	Prog	Р	Р	ANALOG	RGB	VESA768-75		
1859	79.98	75.02	135.000	1280 × 1024	Prog	Р	Р	ANALOG	RGB	VESA1024-75		
1860	91.15	85.02	157.500	1280 × 1024	Prog	Р	Р	ANALOG	RGB	VESA1024-85		
1861	75.00	60.00	162.000	1600 × 1200	Prog	Р	Р	ANALOG	RGB	VESA1200-60		
1862	81.25	65.00	175.500	1600 × 1200	Prog	Р	Р	ANALOG	RGB	VESA1200-65		
1863	87.50	70.00	189.000	1600 × 1200	Prog	Р	Р	ANALOG	RGB	VESA1200-70		
1864	93.75	75.00	202.500	1600 × 1200	Prog	Р	Р	ANALOG	RGB	VESA1200-75		
1865	100.00	80.00	216.000	1600 × 1200	Prog	Р	Р	ANALOG	RGB	VESA1200-80		
1866	106.25	85.00	229.500	1600 × 1200	Prog	Р	Р	ANALOG	RGB	VESA1200-85		
1867	98.21	70.05	236.500	1800 × 1350	Prog	N	Р	ANALOG	RGB	VESA1350-70		
1868	18.44	49.83	16.260	720 × 350	Prog	N	Ν	ANALOG	RGB	MDA		
1869	15.75	60.10	14.360	640 × 200	Prog	N	N	ANALOG	RGB	CGA		
1870	21.85	59.71	16.260	640 × 350	Prog	N	N	ANALOG	RGB	EGA	_	

Program No.	Horizontal frequency [KHz]		Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	pola	nc arity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1871	30.48	60.00	24.870	640 × 400	Prog	N	Ν	ANALOG	RGB	PGA		
1872	31.47	50.03	28.320	720 × 350	Prog	N	Ν	ANALOG	RGB	VGA-TEXT350-50		
1873	31.47	59.94	28.320	720 × 350	Prog	Ν	Ν	ANALOG	RGB	VGA-TEXT350-60		
1874	31.47	70.08	28.320	720 × 350	Prog	N	Ν	ANALOG	RGB	VGA-TEXT350-70		
1875	31.47	50.03	28.320	720 × 400	Prog	N	Ν	ANALOG	RGB	VGA-TEXT400-50		
1876	31.47	59.94	28.320	720 × 400	Prog	N	Ν	ANALOG	RGB	VGA-TEXT400-60		
1877	31.47	70.08	28.320	720 × 400	Prog	Ν	Ν	ANALOG	RGB	VGA-TEXT400-70		
1878	31.47	50.03	25.175	640 × 350	Prog	Ν	Ν	ANALOG	RGB	VGA350-50		
1879	31.47	59.94	25.175	640 × 350	Prog	Ν	Ν	ANALOG	RGB	VGA350-60		
1880	31.47	70.09	25.175	640 × 350	Prog	N	Ν	ANALOG	RGB	VGA350-70		
1881	31.47	50.03	25.175	640 × 400	Prog	Ν	Ν	ANALOG	RGB	VGA400-50		
1882	31.47	59.94	25.175	640 × 400	Prog	Ν	Ν	ANALOG	RGB	VGA400-60		
1883	31.47	70.09	25.175	640 × 400	Prog	Ν	Ν	ANALOG	RGB	VGA400-70		
1884	31.47	50.03	25.175	640 × 480	Prog	N	Ν	ANALOG	RGB	VGA480-50		
1885	31.47	59.94	25.175	640 × 480	Prog	Ν	Ν	ANALOG	RGB	VGA480-60		
1886	35.16	56.16	36.000	800 × 600	Prog	N	Ν	ANALOG	RGB	S-VGA-56		
1887	48.08	72.19	50.000	800 × 600	Prog	N	Ν	ANALOG	RGB	S-VGA-72		
1888	46.88	75.00	49.500	800 × 600	Prog	N	N	ANALOG	RGB	S-VGA-75		
1889	48.08	59.80	65.000	1024 × 768	Prog	N	Ν	ANALOG	RGB	XGA-60		
1890	53.95	66.11	71.640	1024 × 768	Prog	N	N	ANALOG	RGB	XGA-66		

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	Sy pola H	nc arity V	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1891	56.48	70.07	75.000	1024 × 768	Prog	Ν	Ν	ANALOG	RGB	XGA-70		
1892	60.68	57.03	100.000	1280 × 1024	Prog	Ν	Ν	ANALOG	RGB	SXGA-57		
1893	63.5	59.68	106.930	1280 × 1024	Prog	Ν	Ν	ANALOG	RGB	SXGA-60A		
1894	63.75	59.75	110.160	1280 × 1024	Prog	Ν	Ν	ANALOG	RGB	SXGA-60B		
1895	63.72	60.00	109.470	1280 × 1024	Prog	Ν	Ν	ANALOG	RGB	SXGA-60C		
1896	78.91	74.16	132.880	1280 × 1024	Prog	Ν	Ν	ANALOG	RGB	SXGA-70		
1897	74.63	59.94	160.000	1600 × 1200	Prog	Ν	Ν	ANALOG	RGB	UXGA1200-60		
1898	107.42	85.05	220.000	1600 × 1200	Prog	Ν	Ν	ANALOG	RGB	UXGA1200-85A		
1899	106.48	85.05	230.000	1600 × 1200	Prog	Ν	Ν	ANALOG	RGB	UXGA1200-85B		
1900	107.42	80.05	220.000	1600 × 1280	Prog	Ν	Ν	ANALOG	RGB	UXGA1280-80A		
1901	106.48	80.06	230.000	1600 × 1280	Prog	Ν	Ν	ANALOG	RGB	UXGA1280-80B		
1902	106.4	80.00	238.340	1600 × 1280	Prog	Ν	Ν	ANALOG	RGB	UXGA1280-80C		
1903	109.82	80.40	246.000	1600 × 1280	Prog	Z	Ν	ANALOG	RGB	UXGA1280-82		
1904	35.52	86.96	44.900	1024 × 768	Int	Ν	Ν	ANALOG	RGB	IBM 8514A		
1905	63.36	60.00	89.210	1024 × 1024	Prog	Ν	Ν	ANALOG	RGB	IBM 5080		
1906	29.58	73.14	24.020	640 × 754	Int	Ν	Ν	ANALOG	RGB	IBM 5550		
1907	63.36	60.00	111.520	1280 × 1024	Prog	N	N	ANALOG	RGB	IBM 6000		
1908	15.71	59.98	6.380	323 × 246	Prog	N	N	ANALOG	RGB	NAVIGATION		
1909	35	66.67	30.240	640 × 480	Prog	Ν	Ν	ANALOG	RGB	Mac 480-66A		
1910	34.97	66.60	31.330	640 × 480	Prog	N	Ν	ANALOG	RGB	Mac 480-66B		

Program No.	Horizontal frequency [KHz]		Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	pola	nc arity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1911	48.83	66.89	50.000	800 × 600	Prog	Ν	Ν	ANALOG	RGB	Mac 600-66		
1912	49.72	74.55	57.280	832 × 624	Prog	Ν	Ν	ANALOG	RGB	Mac 624-57		
1913	48.78	59.56	64.000	1024 × 768	Prog	Ν	Ν	ANALOG	RGB	Mac 768-60		
1914	60.24	74.93	80.000	1024 × 768	Prog	Ν	Ν	ANALOG	RGB	Mac 768-75		
1915	68.68	75.06	100.000	1152 × 870	Prog	Ν	Ν	ANALOG	RGB	Mac 870-75		
1916	24.82	56.42	21.050	640 × 400	Prog	Ν	Ν	ANALOG	RGB	NEC PC9801		
1917	32.86	79.84	47.840	1120 × 750	Int	Ν	Ν	ANALOG	RGB	NEC PC9801XL		
1918	50.02	60.05	78.430	1120 × 750	Prog	Ν	Ν	ANALOG	RGB	NEC 768-60A		
1919	56.48	70.07	75.000	1024 × 768	Prog	Ν	Ζ	ANALOG	RGB	NEC 768-70		
1920	64.6	59.93	107.500	1280 × 1024	Prog	Ν	Ν	ANALOG	RGB	NEC 1024-60		
1921	74.88	69.85	127.000	1280 × 1024	Prog	Ν	Ν	ANALOG	RGB	NEC 1024-70		
1922	78.86	74.11	135.000	1280 × 1024	Prog	Ν	Ν	ANALOG	RGB	NEC 1024-75		
1923	48.36	60.08	65.000	1024 × 768	Prog	Ν	Ν	ANALOG	RGB	NEC 768-60B		
1924	61.8	65.95	92.940	1152 × 900	Prog	Ν	Ν	ANALOG	RGB	SUN 900-66		
1925	71.73	76.07	105.590	1152 × 900	Prog	Ν	Ν	ANALOG	RGB	SUN 900-76		
1926	70.84	84.03	92.940	1024 × 800	Prog	N	N	ANALOG	RGB	SUN 800-84		
1927	81.13	76.11	135.000	1280 × 1024	Prog	N	N	ANALOG	RGB	SUN 1024-76		
1928	63.38	60.02	107.500	1280 × 1024	Prog	N	N	ANALOG	RGB	SONY NEWS		
1929	78.86	74.11	135.000	1280 × 1024	Prog	N	N	ANALOG	RGB	SONY 1024-74		
1930	78.86	74.11	135.000	1280 × 1024	Prog	N	N	ANALOG	RGB	SONY 1024-74		

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	pol	nc arity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1931	48.48	59.64	64.000	1024 × 768	Prog	N	Ν	ANALOG	RGB	SGI Indigo768-60		
1932	77.01	72.38	130.000	1280 × 1024	Prog	N	Ν	ANALOG	RGB	SGI Indigo1024-72		
1933	63.9	60.00	107.350	1280 × 1024	Prog	N	Ν	ANALOG	RGB	SGI IRIS4D		
1934	63.33	59.97	108.170	1280 × 1024	Prog	N	Ν	ANALOG	RGB	HP 9000t1		
1935	78.13	72.00	135.000	1280 × 1024	Prog	N	Ν	ANALOG	RGB	HP 9000t2		
1936	54	60.00	69.120	1024 × 864	Prog	N	Ν	ANALOG	RGB	VAX 768-60		
1937	70.66	66.47	119.840	1280 × 1024	Prog	N	Ν	ANALOG	RGB	VAX 1024-66		
1938	60.05	75.06	78.780	1024 × 768	Prog	N	Ν	ANALOG	RGB	Fujitsu FMV 1024-75		
1939	80.66	100.83	108.410	1024 × 768	Prog	N	Ν	ANALOG	RGB	Fujitsu FMV 1024-100		
1940	79.7	74.83	134.370	1280 × 1024	Prog	N	Ν	ANALOG	RGB	Fujitsu FMV5166		
1941	80.38	75.12	135.040	1280 × 1024	Prog	N	Ν	ANALOG	RGB	Fujitsu FMV5133		
1942	63.74	60.02	108.100	1280 × 1024	Prog	Ν	Ν	ANALOG	RGB	Fujitsu SIGMA		
1943	78.16	71.64	135.060	1280 × 1024	Prog	N	Ν	ANALOG	RGB	HITACHI SXGA		
1944	26.35	59.90	22.770	640 × 400	Prog	Ν	Ν	ANALOG	RGB	Panasonic M550		
1945	46.88	75.00	49.500	800 × 600	Prog	Р	Р	ANALOG	RGB	VESA600-75		
1946	31.47	59.94	25.175	640 × 480	Prog	Ν	Ν	ANALOG	RGB	VGA480-60		
1947	31.47	59.95	28.640		Prog	-	Ν	ANALOG	RGB	ASTRO SC-2025		
1948	64	59.98	115.200	1400 × 1050	Prog	N	Ν	ANALOG	RGB	SXGA+		
1949	94.64	59.60	265.000	2048 × 1536	Prog	N	Ν	ANALOG	RGB	QXGA		
1950	15.73	59.94	13.500	712 × 484	Int	Ν	N	NTSC	YPbPr	NTSC		

Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	pol	nc arity V	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1951	33.75	60.00	74.250	1920 × 1080	Int	N	Ν	HDTV1080	YPbPr	1080i		
1952	31.47	59.94	25.175	640 × 480	Prog	N	Ν	ANALOG	RGB	VGA480-60		
1953	31.47	59.94	25.175	640 × 480	Prog	N	Ν	ANALOG	RGB	VGA480-60		
1954	31.47	59.94	25.175	640 × 480	Prog	N	Ν	ANALOG	RGB	VGA480-60		
1955	31.47	59.94	25.175	640 × 480	Prog	Ν	Ν	ANALOG	RGB	VGA480-60		
1956	31.22	49.98	46.200	1170 × 1168	Int	Ν	Ν	ANALOG	RGB	MEDICAL-1I		
1957	31.22	50.03	46.200	1170 × 584	Prog	Ν	Ν	ANALOG	RGB	MEDICAL-1N		
1958	30.69	60.00	36.830	947 × 946	Int	Ν	Ν	ANALOG	RGB	MEDICAL-2I		
1959	30.69	60.06	36.830	947 × 473	Prog	Ν	Ν	ANALOG	RGB	MEDICAL-2N		
1960	37.93	85.04	35.500	720 × 400	Prog	Ν	Р	ANALOG	RGB	VESA400-88		
1961	112.5	90.00	243.000	1600 × 1200	Prog	Ν	Ν	ANALOG	RGB	1200-90		
1962	31.47	59.94	25.175	640 × 480	Prog	Ν	Ν	ANALOG	RGB	VGA480-60		
1963	63.98	60.02	108.000	1280 × 1024	Prog	Р	Р	ANALOG	RGB	VESA1024-60		
1964	15.63	50.00	13.500	702 × 574	Int	Ν	Ν	SECAM	YPbPr	SECAM		
1965	31.47	59.94	34.240	864 × 480	Prog	Ν	Ν	ANALOG	RGB	W-VGA		
1966	37.88	60.32	53.940	1072 × 600	Prog	Ν	Z	ANALOG	RGB	W-SVGA		
1967	48.36	60.00	87.440	1376 × 768	Prog	N	N	ANALOG	RGB	W-XGA		
1968	15.73	59.94	13.500	712 × 484	Int	N	N	NTSC	YPbPr	NTSC		
1969	15.63	50.00	13.500	702 × 574	Int	N	Ν	PAL	YPbPr	PAL		
1970	67.5	60.00	148.500	1920 × 1080	Prog	N	N	HDTV1080	YPbPr	1080P		


Program No.	Horizontal frequency [KHz]	Vertical frequency [Hz]	Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	pol	nc arity	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1971	67.43	59.94	148.352	1920 × 1080	Prog	N	Ν	HDTV1080	YPbPr	1080P		
1972	33.75	60.00	74.250	1920 × 1080	Int	N	Ν	HDTV1080	YPbPr	1080i		
1973	33.72	59.94	74.176	1920 × 1080	Int	N	Ν	HDTV1080	YPbPr	1080i		
1974	33.75	60.00	74.250	1920 × 1035	Int	Ν	Ν	HDTV1080	YPbPr	1035i		
1975	33.72	59.94	74.176	1920 × 1035	Int	N	Ν	HDTV1080	YPbPr	1035i		
1976	45	60.00	74.250	1280 × 720	Prog	N	Ν	HDTV720	YPbPr	720P		
1977	44.96	59.94	74.176	1280 × 720	Prog	Ν	Ν	HDTV720	YPbPr	720P		
1978	31.47	59.94	27.000	720 × 483	Prog	Ν	Ν	ANALOG	YPbPr	483P		
1979	31.25	50.00	27.000	720 × 576	Prog	Ν	Ν	ANALOG	YPbPr	PAL*2		
1980	83.64	60.00	204.750	1792 × 1344	Prog	Ν	Р	ANALOG	RGB	VESA1344-60		
1981	83.64	60.00	204.750	1792 × 1344	Prog	Ν	Р	ANALOG	RGB	VESA1344-60		
1982	86.33	60.00	218.250	1856 × 1392	Prog	Ν	Р	ANALOG	RGB	VESA1392-60		
1983	86.33	60.00	218.250	1856 × 1392	Prog	Ν	Р	ANALOG	RGB	VESA1392-60		
1984	90	60.00	234.000	1920 × 1440	Prog	Ν	Р	ANALOG	RGB	VESA1440-60		
1985	90	60.00	234.000	1920 × 1440	Prog	Ν	Р	ANALOG	RGB	VESA1440-60		
1986	31.47	59.94	25.175	640 × 480	Prog	Ν	Ν	ANALOG	RGB	VGA480-60		
1987	31.47	59.94	25.175	640 × 480	Prog	N	Ν	ANALOG	RGB	VGA480-60		
1988	31.47	59.94	25.175	640 × 480	Prog	N	Ν	ANALOG	RGB	VGA480-60		
1989	31.47	59.94	25.175	640 × 480	Prog	N	Ν	ANALOG	RGB	VGA480-60		
1990	31.47	59.94	25.175	640 × 480	Prog	N	N	ANALOG	RGB	VGA480-60		


Program No.	Horizontal frequency [KHz]		Dot clock frequency [MHz]	No. of display dots (H × V)	Int / Prog	pola	nc arity V	SyncType	Color difference	Timing data name	Pattern data	Pattern data name
1991	31.47	59.94	25.175	640 × 480	Prog	Ν	Ν	ANALOG	RGB	VGA480-60		
1992	31.47	59.94	25.175	640 × 480	Prog	Ν	Ν	ANALOG	RGB	VGA480-60		
1993	31.47	59.94	25.175	640 × 480	Prog	Ν	Ν	ANALOG	RGB	VGA480-60		
1994	15.73	59.94	13.500	712 × 484	Int	Ν	Ν	NTSC-M	YPbPr	NTSC-M		
1995	31.47	59.94	25.175	640 × 480	Prog	Ν	Ν	ANALOG	RGB	VGA480-60		
1996	31.47	59.94	25.175	640 × 480	Prog	Ν	Ν	ANALOG	RGB	VGA480-60		
1997	48.08	72.19	50.000	800 × 600	Prog	Р	Р	ANALOG	RGB	VESA600-72		
1998	56.48	70.07	75.000	1024 × 768	Prog	Ν	Ν	ANALOG	RGB	VESA768-70		
1999	79.98	75.02	135.000	1280 × 1024	Prog	Р	Р	ANALOG	RGB	VESA1024-75		

11.3.2 Optional pattern data

The internal optional pattern data (No.1 to No.70) of the VG-870B/871B is as shown below.

No.	Pattern Name	No.	Pattern Name	No.	Pattern Name	No.	Pattern Name
1	256-Color Block	2	64Gray Block White->	3	64Gray Block Black->	4	8-Color & 16-Gray
5	Gray & Cross Hatch	6	Color & Cross Hatch	7	Color Temperature	8	Pairing
							0 0
9	Cross & Circle & Gray	10	Cross & Circle & Color & H	11	Circle & Line	12	H-Character Line
13	O-Character Line	14	Cross Talk W = 90%	15		16	NTSC Color
17	Sign Wave Scroll	18	Multi Burst 100%	19	1/10 MHz × 10step	20	Gamma Ramp wγ=2.5
21	Gamma Ramp γ=2.0	22	Gamma Ramp γ=0.5	23	SMPTE Color	24	SMPTE RP-27.1
25	ITC 9-Window	26	ITC Cross & Marker	27	ITC H-Character	28	32-Gray H
29	64-Gray H	30	64-Gray H & RGBW-Color	31	Gray & Circle	32	AFD
					0.0		

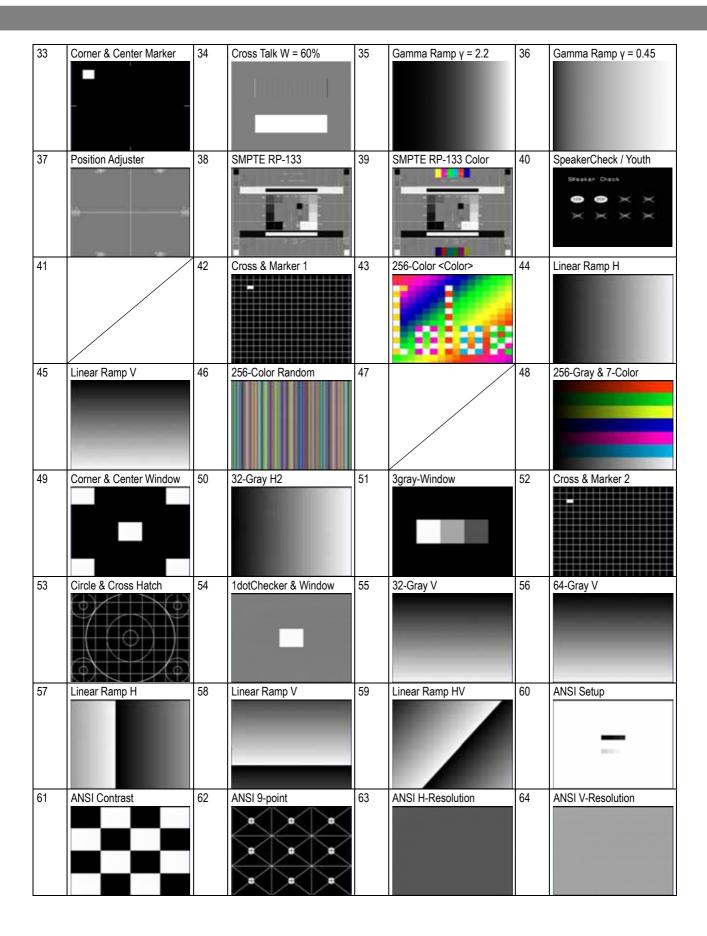

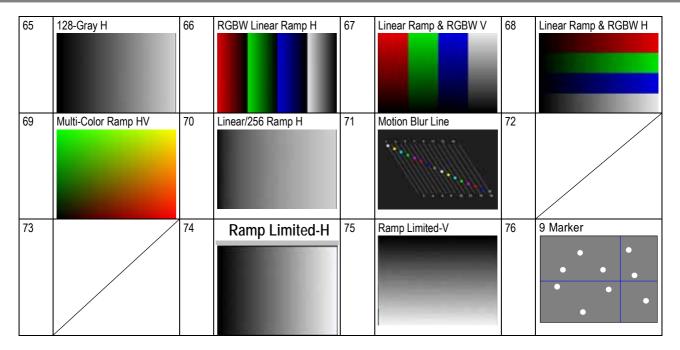


11.3.3 User character pattern data


Code (H)	Description	Cell size	Reference page
F0	Letters "me" #1	18 × 18	p.428
F1	Letters "me" #2 (VESA specifications)	18 × 18	p.428
F2	Chinese character "AI"	64 × 64	p.429
F3	Chinese character "BI"	64 × 64	p.429
F4	Chinese character "TAKA"	32 × 32	p.430
F5	Chinese character "KIRI"	32 × 32	p.430
F6	Chinese character "KEN"	32 × 32	p.431
F7	Burst	64 × 64	p.431
F8			
F9			
FA			
FB			
FC			
FD			
FE			
FF			

■ F0H [letters "me" #1]/F1H [letters "me" #2 (VESA specifications)]

F0H

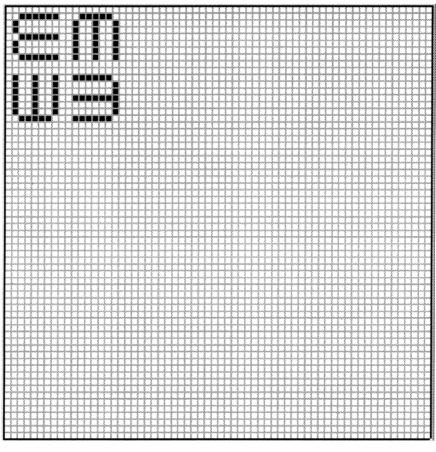


F1H

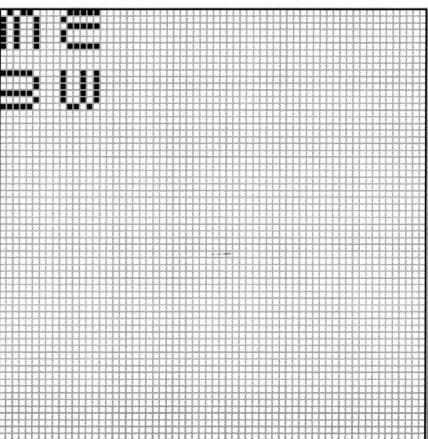


■ F2H [Chinese character "Al"]/F3H [Chinese character "Bl"]

F2H

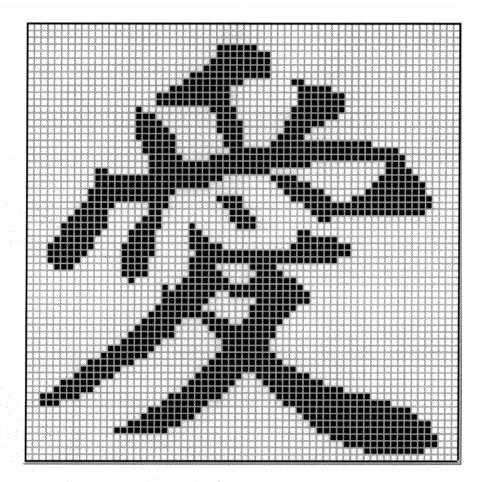


F3H

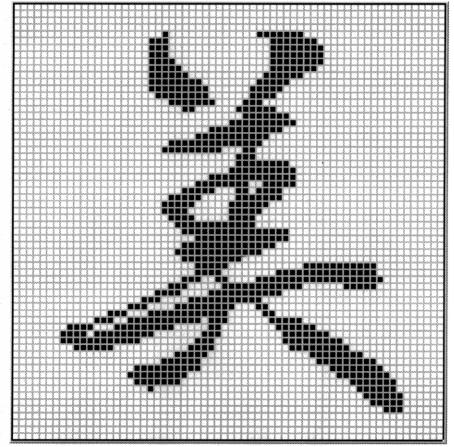


■ F4H [Chinese character "TAKA"]/F5H [Chinese character "KIRI"]

F4H

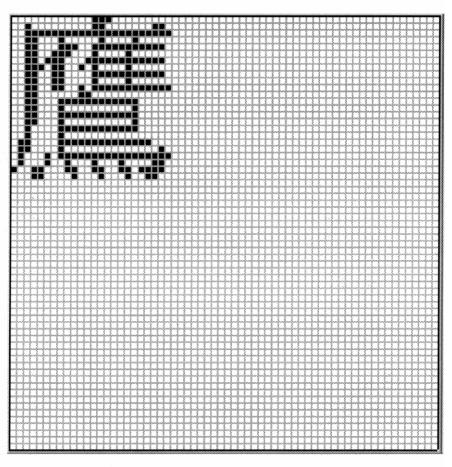


F5H

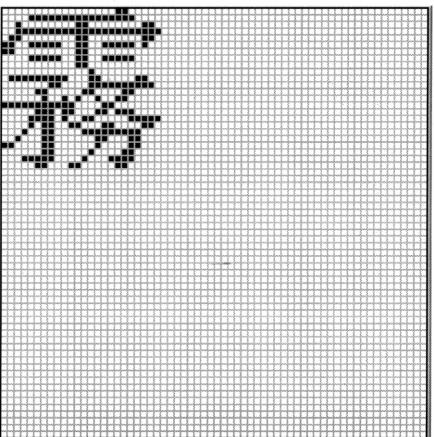


■ F6H [Chinese character "KEN"]/F7H [Burst]

F6H

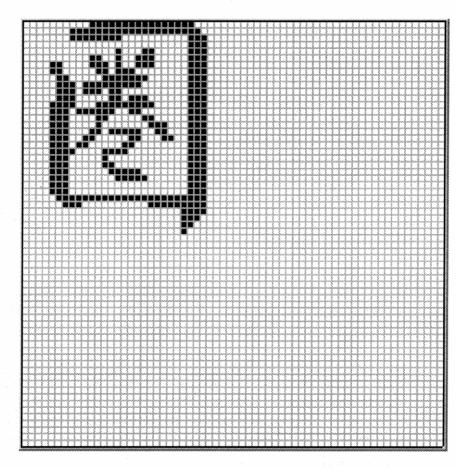


F7H

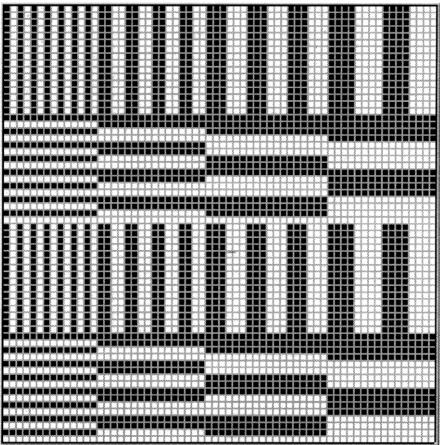


11.3.4 Character pattern data


■ 5 × 7 character pattern table (1 of 2)

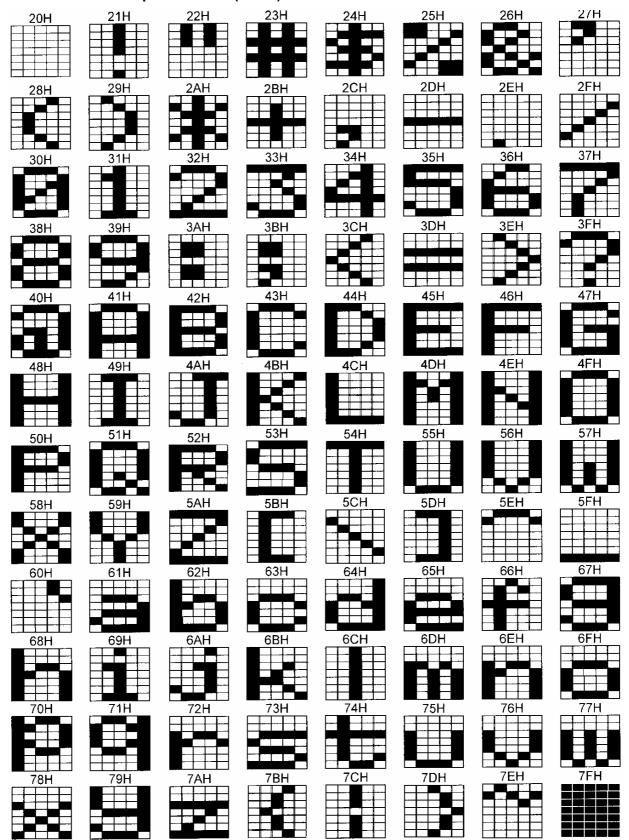

■ 5 × 7 character pattern table (2 of 2)

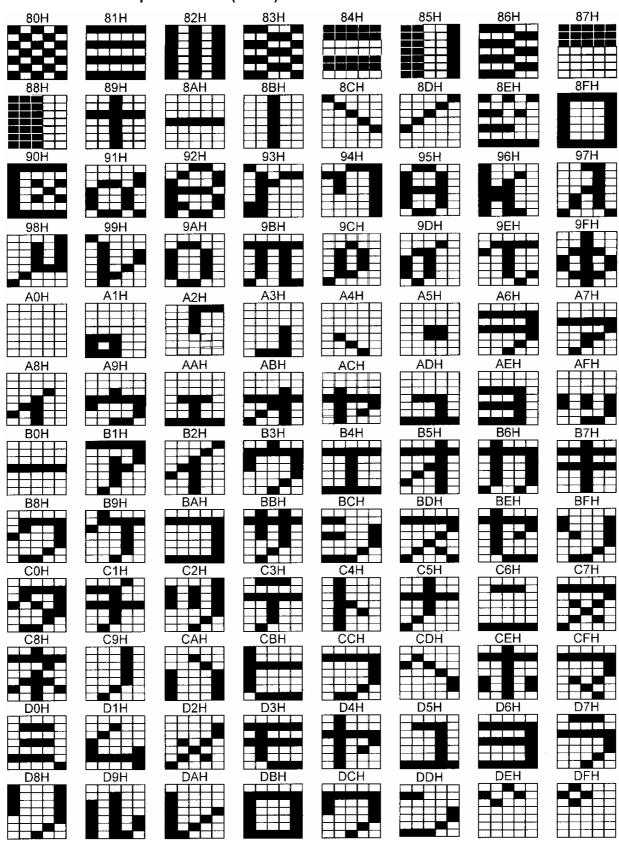

■ 7 × 9 character pattern table (1 of 2)

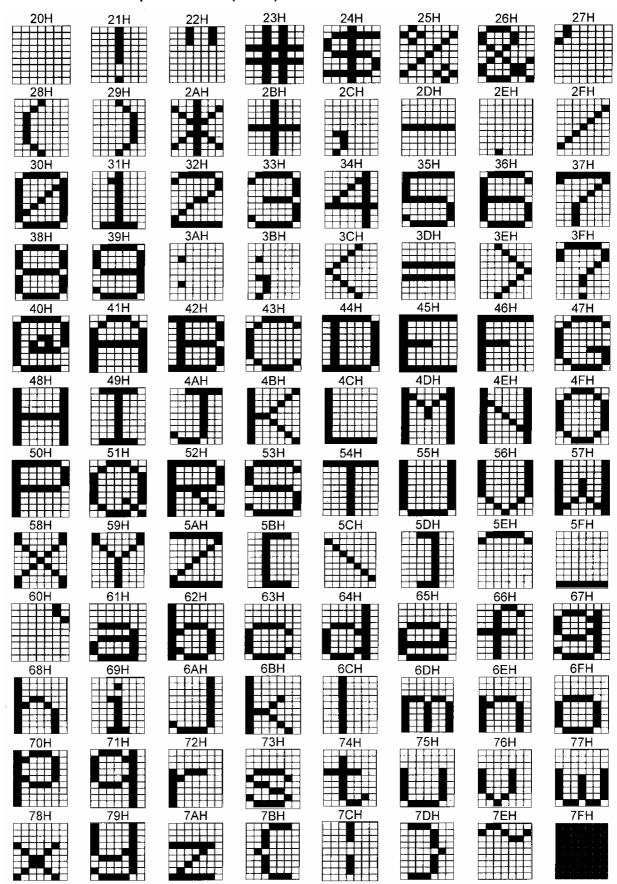


■ 7 × 9 character pattern table (2 of 2)


* 8×9 dots are used for 80H to 8FH.

80H	81H	82H	83H	84H	85H	86H	87H
88H	89H	8AH	8BH	8CH	8DH	8EH	8FH
90H	91H	92H	93H	94H	95H	96H	97H
98H	99H	9AH	9BH	9CH	9DH	9EH	9FH
AOU	0.411	A2H	АЗН	A4H	A5H	A6H	A7H
AOH	A1H	AZIT	ASIT	A411	AUT	AOT	
A8H	A9H	AAH	ABH	ACH	ADH	AEH	AFH
BOH	B1H	B2H	B3H	B4H	B5H	B6H	B7H
B8H	B9H	BAH	BBH	BCH	BDH	BEH	BFH
C0H	C1H	C2H	C3H	C4H	C5H	C6H	C7H
C8H	ran	CAH	CBH	CCH	CDH	CEH	CFH
		CAH					
DOH	D1H	D2H	D3H	D4H	D5H	D6H	D7H
					DDH		
D8H	D9H	DAH	DBH	DCH	DDH	DEH	DFH


■ 16 × 16 character pattern table (1 of 4)

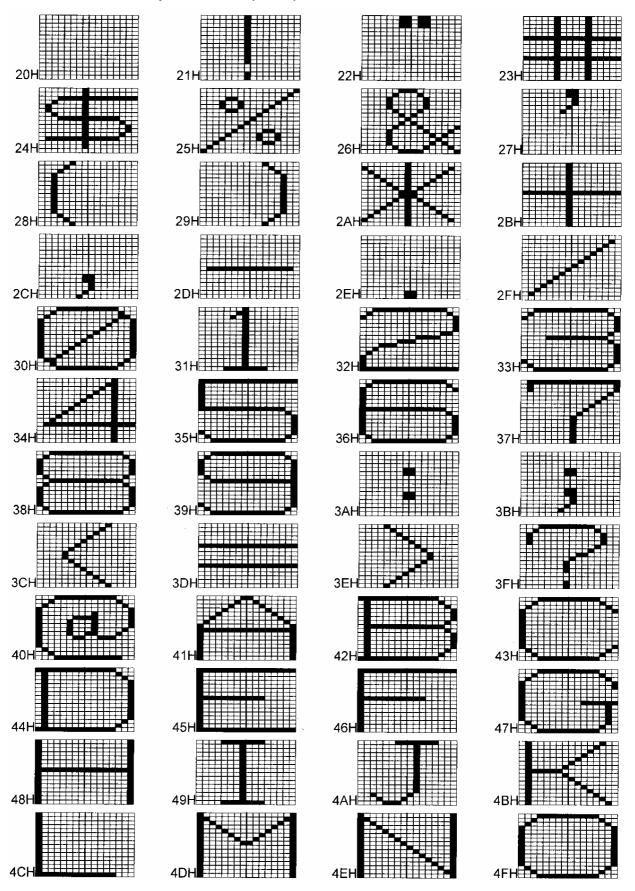


■ 16 × 16 character pattern table (2 of 4)

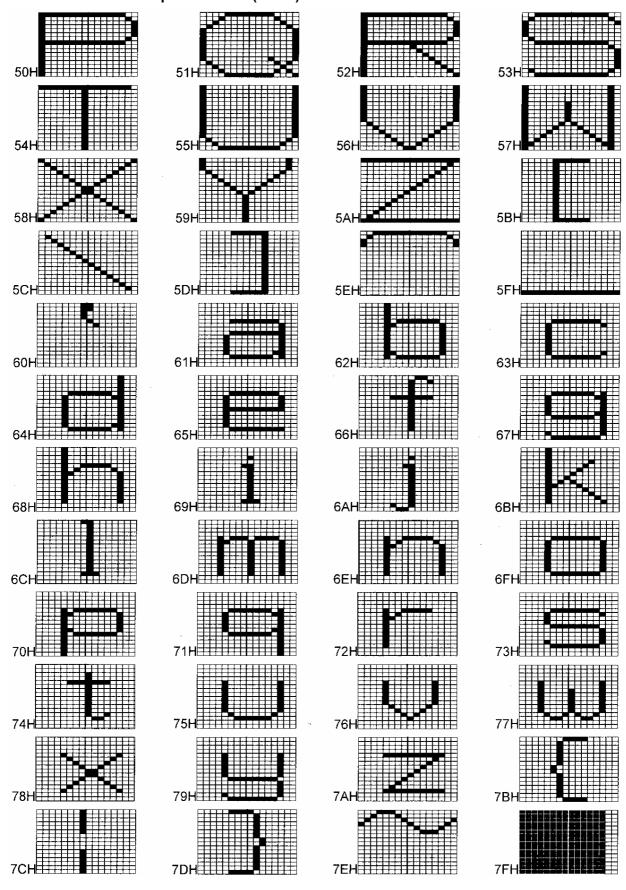

■ 16 × 16 character pattern table (3 of 4)

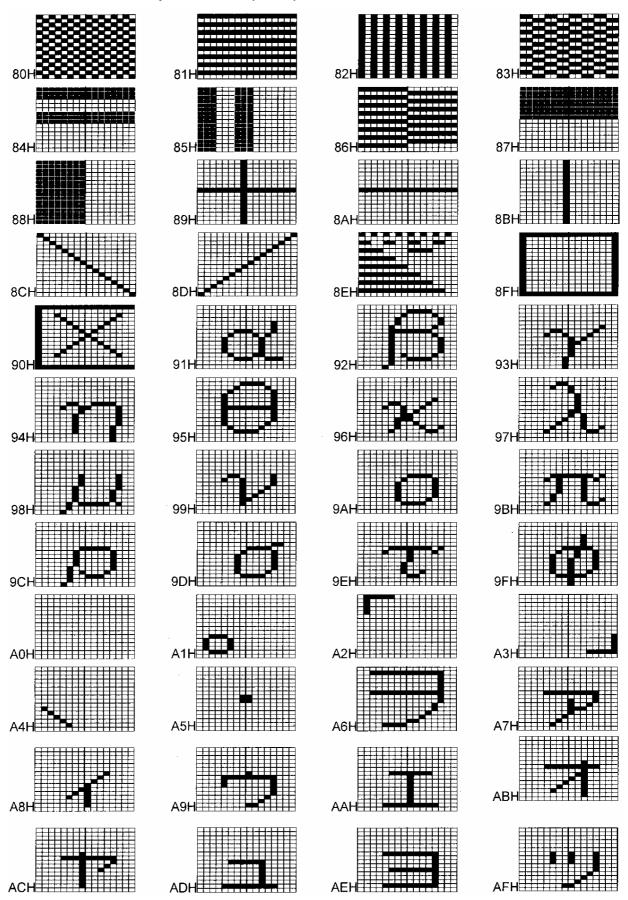

■ 16 × 16 character pattern table (4 of 4)

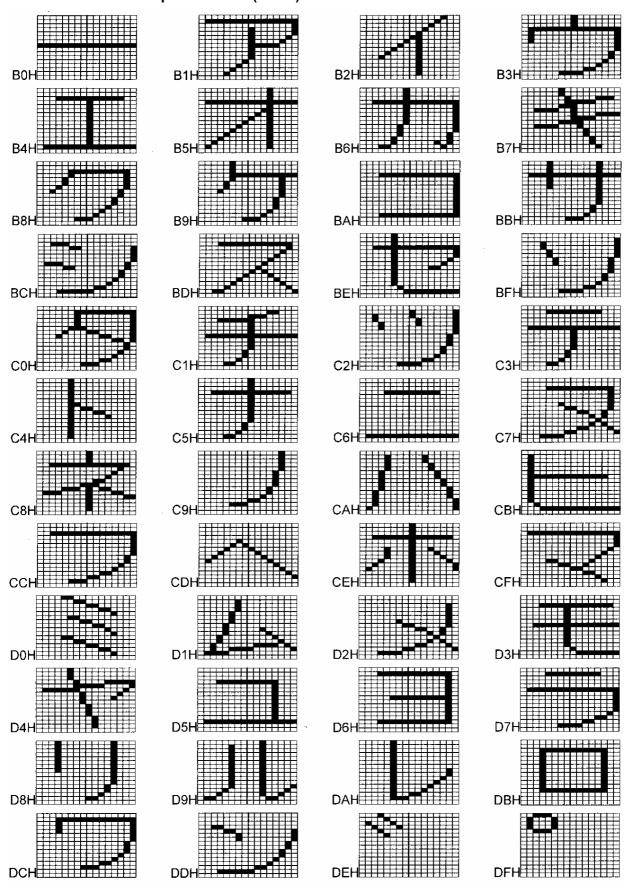

11.3.5 Tables of standard signals


■ Table of TV standard signals (1 of 2)

Signal format	Total no. of samples	Total no. of samples	Total no. of samples	Frame rate [Hz]	Scanning system	Subcarrier frequency [MHz]	Aspect ratio	Video level [mV]	Sync level [mV]	SETUP	Main countries where used
NTSC-J (Japan)	NTSC (RS-170A)	712 × 484	858 × 525	60/1.001	Interlaced	3.579545	4:3	714	286	No	Japan
NTSC-M	NTSC	712 × 484	858 × 525	60/1.001	Interlaced	3.579545	4:3	714	286	Yes	USA
NTSC-443	NTSC	712 × 484	858 × 525	60/1.001	Interlaced	4.43361875	4:3	714	286	Yes	
PAL-60	PAL	712 × 484	858 × 525	60/1.001	Interlaced	4.43361875	4:3	700	300	No	
PAL-M	PAL	712 × 484	858 × 525	60/1.001	Interlaced	3.57561189	4:3	714	286	Yes	Brazil
PAL (B/D/G/H/I/K)	PAL (BT.470-6)	702 × 574	864 × 625	50	Interlaced	4.43361875	4:3	700	300	No	U.K, Germany
PAL-N	PAL	718 × 574	864 × 625	50	Interlaced	4.43361875	4:3	714	286	Yes	Uruguay
PAL-Nc	PAL	702 × 574	864 × 625	50	Interlaced	3.58205625	4:3	700	300	No	Argentina
SECAM	SECAM	702 × 574	864 × 625	50	Interlaced	for = 4.406250 fob = 4.250000	4:3	700	300	No	France, Russia
483p (NTSC-PROG)	SMPTE293M	720 × 483	848 × 525	60/1.001	Progressive	-	4:3	700	300	-	-
576p (PAL-PROG)	BT.1358	720 × 574	864 × 625	50	Progressive	-	4:3	700	300	-	-


■ Table of TV standard signals (2 of 2)

Signal format	Total no. of samples	Total no. of samples	Total no. of samples	Frame rate [Hz]	Scanning system	Subcarrier frequency [MHz]	Aspect ratio	Video level [mV]	Sync level [mV]	SETUP	Main countries where used
720p	SMPTE296M	1280 × 720	1650 × 750	60	Progressive	-	16:9	700	300	-	-
			1650 × 750	60/1.001							
			1980 × 750	50							
			3300 × 750	30							
			3300 × 750	30/1.001							
			3960 × 750	25							
			4125 × 750	24							
			4125 × 750	24/1.001							
1035i	BTA S-001A	1920 × 1035	2200 × 1125	60	Interlaced	-	16:9	700	300	-	-
				60/1.001							
1080i	SMPTE274M	1920 × 1080	2200 × 1125	60	Interlaced	-	16:9	700	300		
			2200 × 1125	60/1.001							
			2640 × 1125	50							
1080p	SMPTE274M	1920 × 1080	2200 × 1125	60	Progressive	-	16:9	700	300		
			2200 × 1125	60/1.001							
			2640 × 1125	50							
			2200 × 1125	30							
			2200 × 1125	30/1.001							
			2640 × 1125	25							
			2750 × 1125	24							
			2750 × 1125	24/1.001							


■ Table of TV standard signal timing waveforms (1 of 3)

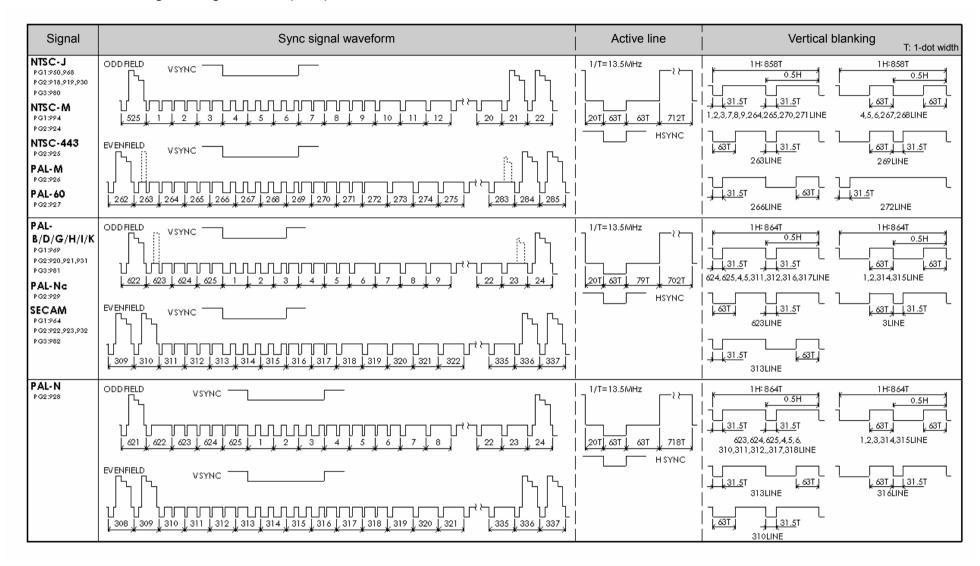

■ Table of TV standard signal timing waveforms (2 of 3)

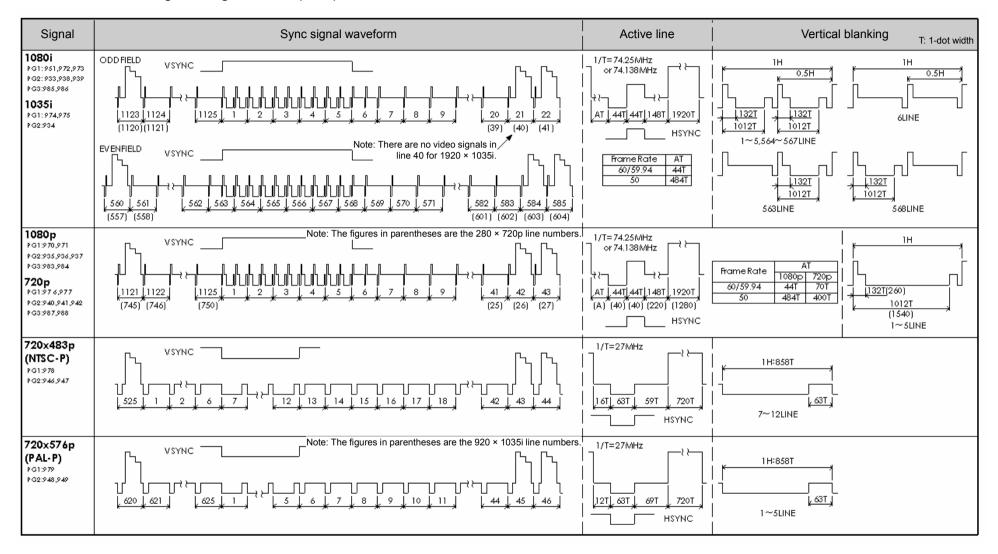

■ Table of TV standard signal timing waveforms (3 of 3)

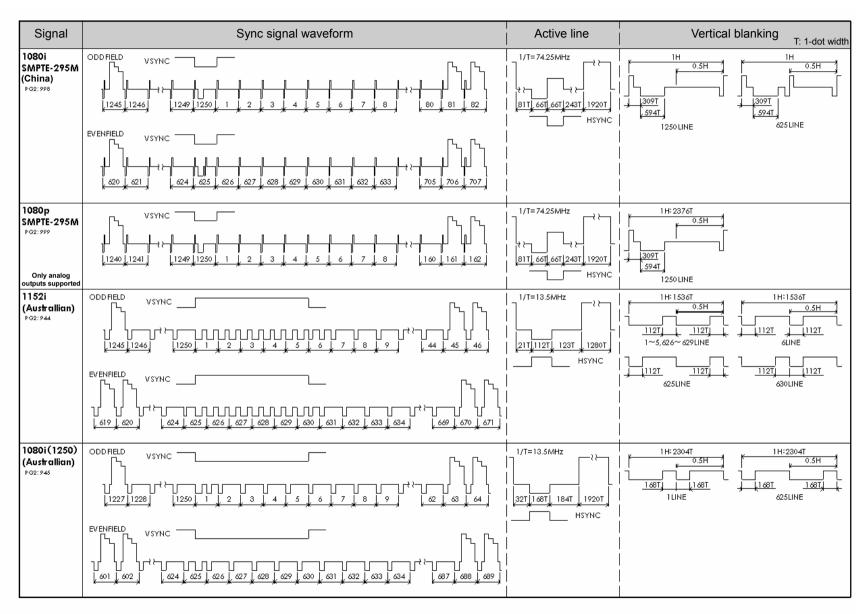



PRECAUTIONARY ITEMS

12.1 Differences between the generator models

This instructions manual has been designed for the VG-870B/871B and, as such, some functions are not supported by the VG-870/871/870A/871A. The table below lists the main differences between the models.

Main differences between the generator models

Function	VG-870/871	VG-870A/871A	VG-870B/871B
Moving images	Not supported	Supported	Supported
USB	Not supported	Supported	Supported
iTMDS	Not supported	Supported	Supported
V-by-One HS (VM-1825)	Not supported	Not supported	Supported
iTMDS(VM-1824)	Not supported	Not supported	Supported
iTMDS QUAD(VM-1824-A)	Not supported	Not supported	Supported


^{*} If users of the VG-870/871/870A/871A wish to use the functions which are not supported by these models, support can be achieved by upgrading to the models VG-870B/871B. For further details, contact an Astrodesign sales representative.

12.2 Relationships between pattern drawing bit length and dot clock frequency

The pattern drawing bit length stands in relationships of dependency on the dot clock frequency. Pattern drawing bit lengths and dot clock frequencies outside the bounds of these relationships cannot be set. These relationships also differ depending on the output video bit length of each unit. They are shown in the following figures.

12.2.1 HDMI unit

The dot clock frequency is restricted by the pattern drawing bit length (Color Depth) shown in the figure below. Data skipping occurs when the output video bit length (Video Width) at this time is less than the pattern drawing bit length (Color Depth).

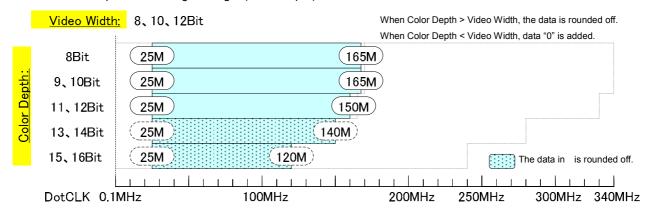


Restrictions on dot clock frequency for HDMI1, HDMI2

For details on the pattern drawing bit length (Color Depth), refer to "4.1.5 Setting the bit length (gray scale) for pattern drawing."


For details on the pattern drawing bit length (Color Depth), refer to "4.2.2 HDMI setting procedure."

12.2.2 TV encoder unit


The dot clock frequency is restricted by the pattern drawing bit length (Color Depth) shown in the figures below. An 8-bit D/A converter is installed in the TV encoder unit, and data skipping occurs when the pattern drawing bit length (Color Depth) is more than 8 bits.

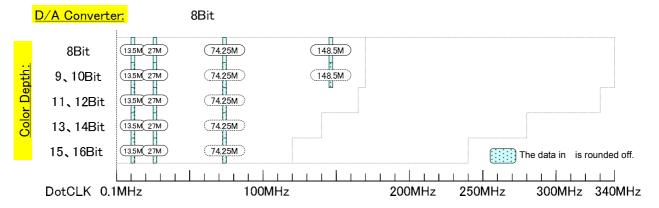

Restrictions on dot clock frequency for D5, YPbPr

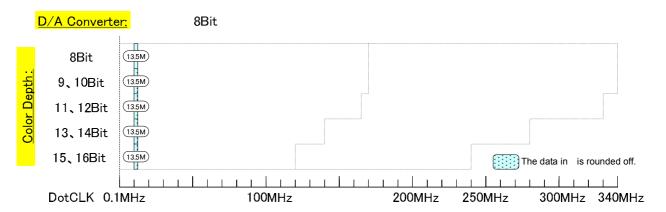

Restrictions on dot clock frequency for COMPOSITE, Y/C (S connector), SCART

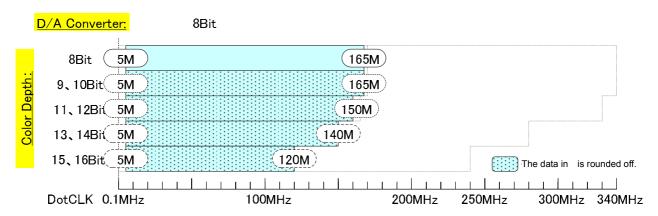


Restrictions on dot clock frequency for VGA


For details on the pattern drawing bit length (Color Depth), refer to "4.1.5 Setting the bit length (gray scale) for pattern drawing."

12.2.3 PC analog unit

The dot clock frequency is restricted by the pattern drawing bit length (Color Depth) shown in the figures below. A 10-bit D/A converter is installed in the PC analog unit, and data skipping occurs when the pattern drawing bit length (Color Depth) is more than 10 bits. A DVI-I (Single Link) unit is also installed, and the data skipping occurs when the pattern drawing bit length (Color Depth) is more than 8 bits.

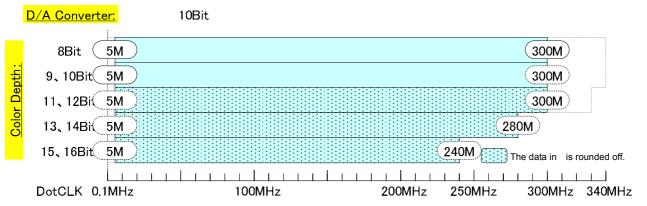

Restrictions on dot clock frequency for RGB, Dsub15, DVI (analog)

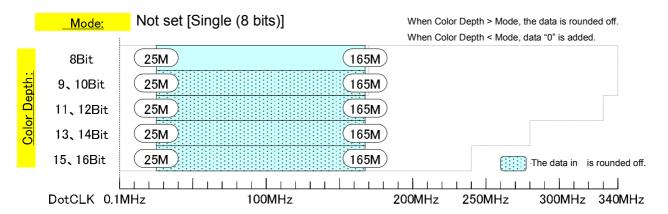


Restrictions on dot clock frequency for DVI (digital)


For details on the pattern drawing bit length (Color Depth), refer to "4.1.5 Setting the bit length (gray scale) for pattern drawing."

12.2.4 **DVI unit**

The dot clock frequency is restricted by the pattern drawing bit length (Color Depth) shown in the figures below. Data skipping occurs when the output video bit length (Video Width) at this time is less than the pattern drawing bit length (Color Depth).

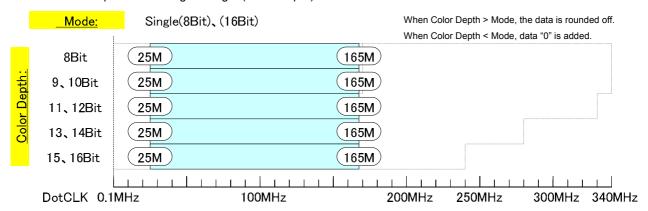

Restrictions on dot clock frequency for DVI (Single Link)

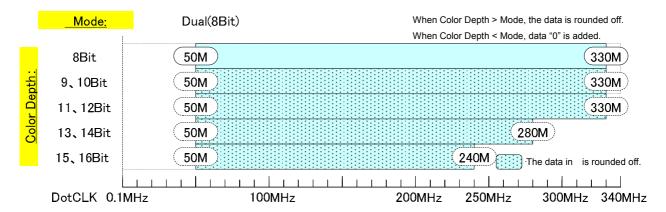


Restrictions on dot clock frequency for DVI (Dual Link)

For details on the pattern drawing bit length (Color Depth), refer to "4.1.5 Setting the bit length (gray scale) for pattern drawing."


For details on the output video bit length (Mode), refer to "4.3.2 DVI unit setting procedure."

12.2.5 LVDS unit


The dot clock frequency is restricted by the pattern drawing bit length (Color Depth) shown in the figures below. Data skipping occurs when the output video bit length (Video Width) at this time is less than the pattern drawing bit length (Color Depth).

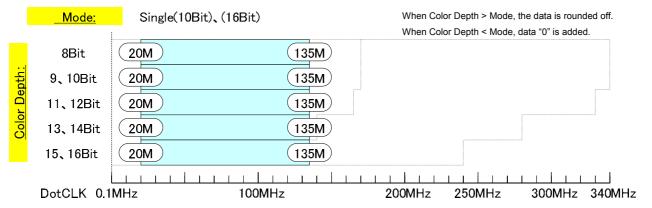

Restrictions on dot clock frequency for LVDS (Single Link)

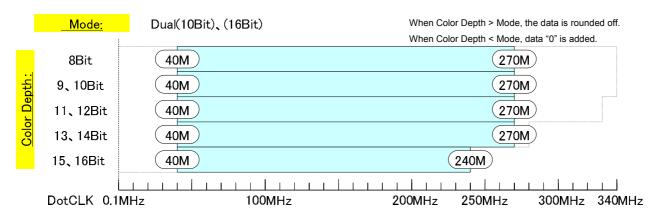

Restrictions on dot clock frequency for LVDS (Dual Link)

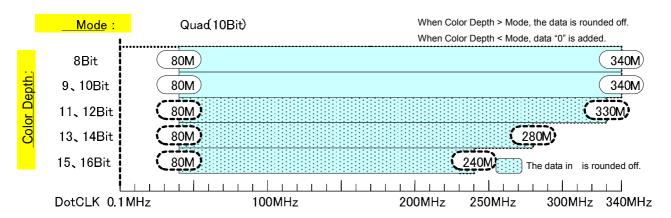


Restrictions on dot clock frequency for LVDS (Quad Link)

For details on the pattern drawing bit length (Color Depth), refer to "4.1.5 Setting the bit length (gray scale) for pattern drawing."


For details on the output video bit length (Mode), refer to "4.5.2 LVDS setting procedure."

12.2.6 Parallel unit

The dot clock frequency is restricted by the pattern drawing bit length (Color Depth) shown in the figures below. Data skipping occurs when the output video bit length (Video Width) at this time is less than the pattern drawing bit length (Color Depth).

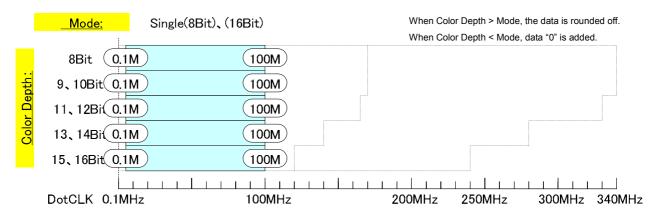

Restriction on parallel (Single Link) dot clock frequency

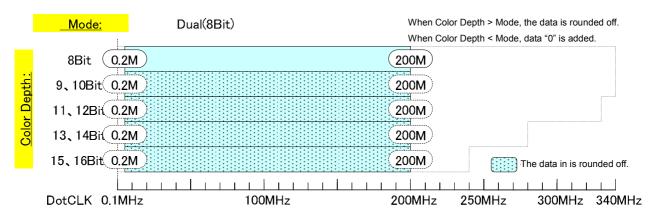


Restriction on parallel (Dual Link) dot clock frequency

For details on the pattern drawing bit length (Color Depth), refer to "4.1.5 Setting the bit length (gray scale) for pattern drawing."


For details on the output video bit length (Mode), refer to "4.6.2 Parallel data setting procedure."

12.2.7 **DP unit**

The dot clock frequency is restricted by the pattern drawing bit length (Color Depth) shown in the figure below. Data skipping occurs when the output video bit length (Video Width) at this time is less than the pattern drawing bit length (Color Depth).

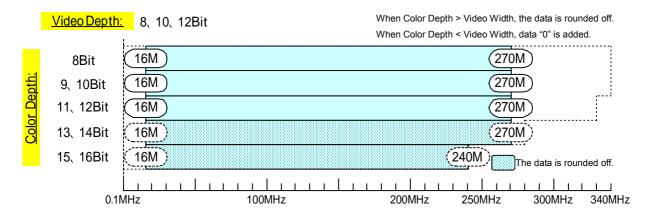

Restrictions on dot clock frequency for DP1, DP2 (Single mode)

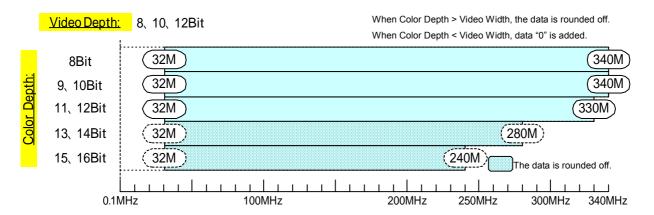

Restrictions on dot clock frequency for DP1, DP2 (Dual/Split mode)


The maximum dot clock also depends on the DisplayPort Link Rate and other settings. For details, refer to "11.1.8 DP unit".

For details on the pattern drawing bit length (Color Depth), refer to "4.1.5 Setting the bit length (gray scale) for pattern drawing".


For details on the output video bit length (Video Width), refer to "4.12.2 DisplayPort setting procedure".

12.2.8 iTMDS unit


The dot clock frequency is restricted by the pattern drawing bit length (Color Depth) shown in the figure below. Data skipping occurs when the output video bit length (Video Width) at this time is less than the pattern drawing bit length (Color Depth).

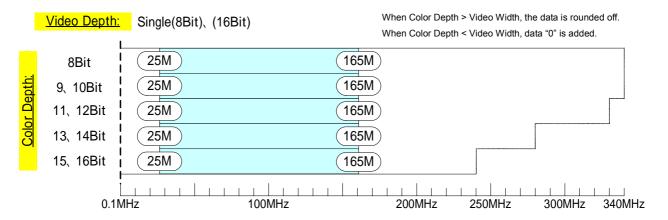


Restrictions on dot clock frequency for iTMDS (DVI_MODE/Single Link)

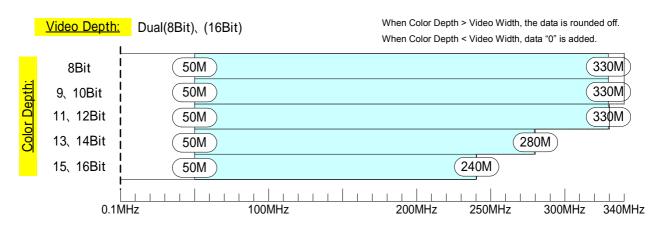


Restrictions on dot clock frequency for iTMDS (DVI MODE/Dual Link)

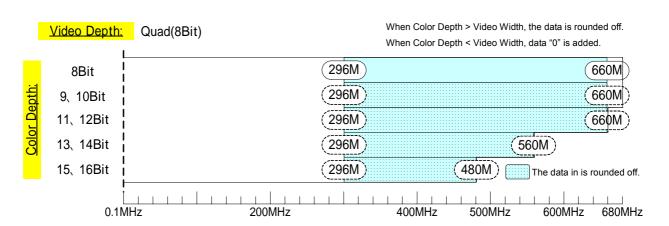


Restrictions on dot clock frequency for iTMDS (DVI MODE/Quad Link)

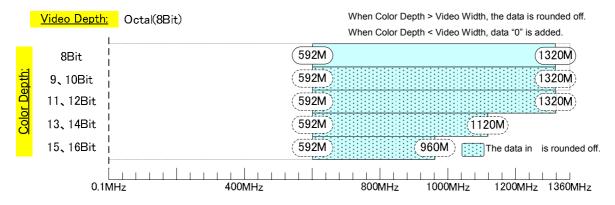


Restrictions on dot clock frequency for iTMDS(DVI MODE/Octal Link)

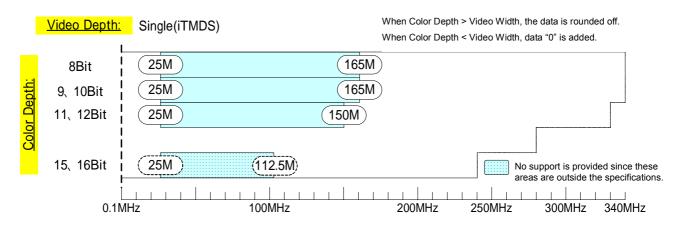


Restrictions on dot clock frequency for iTMDS(iTMDS MODE/Single Link)

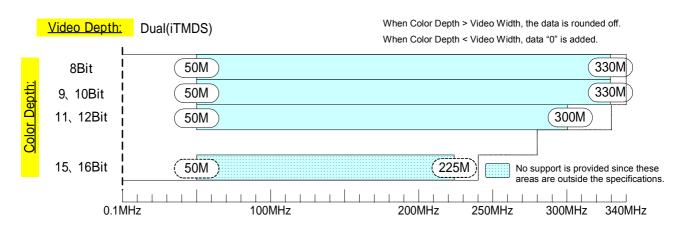

Restrictions on dot clock frequency for iTMDS(iTMDS MODE/Dual Link)

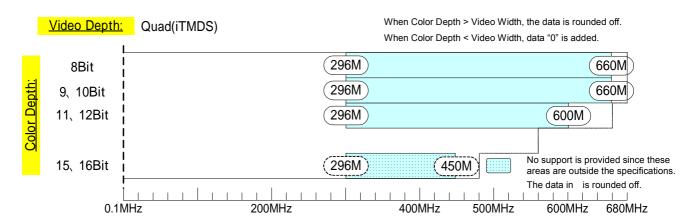

Restrictions on dot clock frequency for iTMDS(iTMDS_MODE/Quad Link)

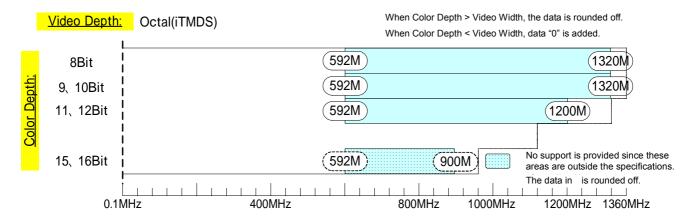

Restrictions on dot clock frequency for iTMDS(iTMDS MODE/Octal Link)

For details on the pattern drawing bit length (Color Depth), refer to "4.1.5 Setting the bit length (gray scale) for pattern drawing."

For details on the output image bit length (Mode), refer to "4.4.2 iTMDS (4K×2K) unit setting procedure."

12.2.9 V-by-One HS unit


With the V-by-One HS unit, the dot clock frequencies are not restricted regardless of the pattern drawing bit length (Color Depth).

12.3 Concerning the maximum current consumption of the DDC (DP_PWR) power supply

DDC power (DP PWR in case of DisplayPort output) is supplied to the outputs of the VG-870B/871B.

The maximum currents supplied by the DDC power supply are as listed below.

- HDMI output: 0.050 A for each channels
- DVI output: 0.5 A total for 2 channels
- LVDS 4-channel output: 0.5 A total for channels 1 to 4, and max. 0.5 A per channel
- Parallel output (2 channels): 0.5 A total for channels 1 and 2, and max. 0.5 A per channel
- TV encoder output: 0.5 A total for all channels
- PC analog output: 0.5 A total for all channels
- DisplayPort output: 0.5 A total for all channels
- 1) The DDC supply voltage is output as shown in the figure below.



DDC power supply output circuit

- 2) The supply voltage differs depending on the output connector.
 - · HDMI output: Fixed at 5 V.
 - DVI output: Fixed at 5 V.
 - LVDS output: Can be switched between 5 V and 3.3 V using a rear panel switch.
 - Parallel output: Can be switched between 5 V, 3.3 V, 2.5 V and 1.8 V using a rear panel switch.
 - TV encoder output: Fixed at 5 V.
 - · PC analog output: Fixed at 5 V.
 - · DisplayPort output: Fixed at 3.3 V.



- The DDC power supply incorporates an overcurrent protection device, but do not use a current which exceeds the rating.
- Do NOT supply power to the DDC power supply from the device connected to the VG-870B/871B. If such the voltage of such a power supply is connected, both the VG-870B/871B and the connected device may fail.



13 LIST OF ERROR MESSAGES

13.1 Media-related error

Code (HEX)	Error message	Description
217	Flash ROM(User) Full	There is not enough free space in the internal memory.
228	No CF-Card	The CF card has not been inserted.
229	CF-Card Unformatted	The CF card has not been formatted.
22A	CF-Card Full	There is not enough free space on the CF card.
22C	OPT Data File Error	Error in the optional pattern data.
22F	Image Data File Error	Error in the image data.
233	Audio Flash Data Already Exist	The audio data has already been registered.
235	Audio Flash File Error	Error in the audio data.
236	Audio Flash Data Full	The maximum amount of audio data which can be registered has been exceeded.

13.2 General error

Code (HEX)	Error message	Description
302	'H-Timing DotClock' Over Limit	Dot clock in the horizontal timing data is outside the setting range.
303	'H-Timing Frontp' Over Limit	Frontp in the horizontal timing data is outside the setting range.
305	'H-Timing HD' Over Limit	HDstart+HDwidth in the horizontal timing data is outside the setting range.
307	'H-Timing Period' Over Limit	Period in the horizontal timing data is outside the setting range.
308	'H-Timing Disp' Over Limit	Disp in the horizontal timing data is outside the setting range.
309	'H-Timing Sync' Over Limit	Sync in the horizontal timing data is outside the setting range.
30A	'H-Timing Backp' Over Limit	Backp in the horizontal timing data is outside the setting range.
30B	'H-Timing Blanking' Over Limit	Blanking in the horizontal timing data is outside the setting range.
30C	H-Frequency Over Limit	The horizontal sync frequency in the horizontal timing data is outside the setting range.
30D	'H-Timing' Data Error	Error other than those described above in the horizontal timing data.
310	'Output' Data Error"	Error in the output condition data.
311	'Character' Data Error"	Error in the character pattern data.
312	'Cross Hatch' Data Error"	Error in the crosshatch pattern data.
313	'Dot' Data Error"	Error in the dot pattern data.
314	'Circle' Data Error"	Error in the circle pattern data.

Code (HEX)	Error message	Description
315	'Burst' Data Error"	Error in the burst pattern data.
316	'Window' Data Error"	Error in the window pattern data.
317	'Color Bar' Data Error"	Error in the color bar pattern data.
318	TERMINAL) Parameter Error	Error in a parameter in the terminal mode.
319	TERMINAL) Data Error	Error in the data in the terminal mode.
31B	'Video/Setup/Sync Level' Error	The video level (Video), setup level (Setup) and sync signal level (Sync) are outside the setting range. (Setting range: [Video ≥ Setup] and [Video ≥ Sync] and [Video ≥ (Setup + Sync)])
31E	TERMINAL) Communication Timeout	Time-out has occurred in the data during communication in the terminal mode.
31F	TERMINAL) Undefined Command	An undefined command was received in the terminal mode.
321	'Program No.' Error"	Error in the program number.
322	'Group No.' Error"	Error in the group number.
323	'Character Code' Error"	Error in a user character code.
32B	'OPT No.' Error"	Error in the optional pattern number.
32D	OPT Data File Not Found"	The optional pattern has not been registered.
32E	'Image No.' Error"	Error in the image pattern number.
330	Image Data File Not Found"	The image pattern has not been registered.
333	CURSOR Not Selected	The cursor pattern has not been selected (when SP-8870 CurTool is used).
334	EDID Read Port Not Found	The EDID read port is not found. (The unit has not been installed.)
338	'Gray Scale' Data Error	Error in the gray scale pattern data.
339	'OPT/Image' Data Error"	Error in the optional pattern or image pattern data.
33B	'Cursor' Data Error	Error in the cursor pattern data.
33C	'Program Name' Data Error	Error in the program name data.
33D	'□×[ABC] Color' Data Error	Error in the □ × [ABC] color data.
33E	'Action' Data Error"	Error in the action data.
340	'V-Timing Total' Over Limit	Total in the vertical timing data is outside the setting range.
341	'V-Timing Disp' Over Limit"	Disp in the vertical timing data is outside the setting range.
342	'V-Timing Sync' Over Limit	Sync in the vertical timing data is outside the setting range.
343	'V-Timing Backp' Over Limit	Backp in the vertical timing data is outside the setting range.
344	'V-Timing Frontp' Over Limit	Frontp in the vertical timing data is outside the setting range.
345	'V-Timing Blanking' Over Limit	Blanking in the vertical timing data is outside the setting range.
346	V-Frequency Over Limit	The vertical sync frequency in the vertical timing data is outside the setting range.
347	'V-Timing VD' Over Limit	VDstart+VDwidth in the vertical timing data is outside the setting range.

Code (HEX)	Error message	Description
348	'V-Timing EQP-Fp' Over Limit	EQP-FP in the vertical timing data is outside the setting range.
349	'V-Timing EQP-Bp' Over Limit	EQP-BP in the vertical timing data is outside the setting range.
34A	'V-Timing' Data Error	Error other than those described above in the vertical timing data.
34E	DDC2 Line Error	ACK was not received in DDC2.
350	Macrovision Not Supported	An IC supporting Macrovision has not been installed in the unit.
352	EDID Header Error	Error in the EDID header.
353	EDID Check Sum Error	EDID checksum error.
354	EDID Header & Check Sum Error	Errors in both the EDID header and checksum.
355	User YPbPr Coefficient Error	Error in the color difference coefficients.
358	Audio Data No. Error	Error in the audio data number.
35A	Audio Data File Not Found	The audio data has not been registered.
35D	Lip Sync Invalid EDID Latency	Error in the EDID at the connection destination (when Mode:EDID has been selected with LipSync).
35F	Lip Sync 'EDID Port' Error	The HDMI unit is not installed (when Mode:EDID has been selected with LipSync).
360	Image License Error	The image data license has not been supplied.
361	Data File Not Found	The data (other than the optional pattern and image data) cannot be found.
362	Copy Condition Error	·The copy source data and copy destination data are identical.
		·The number of copy source data and number of copy destination data are different.
363	Image RAM Full	There is not enough free space in the image memory.
		Set the high-speed drawing mode in 9.1.15 to OFF or reduce the number of data specified.

13.3 HDCP-related error

Code (HEX)	Error message	Description
403	HDCP) Transmitter KSV Error	KSV of the transmitter does not contain twenty '0's and '1's.
404	HDCP) Receiver KSV Error	KSV of the receiver does not contain twenty '0's and '1's.
405	HDCP) Link Check Error	During initial validation, the values did not match (R0 ≠ R0').
406	HDCP) Encryption Error	Encryption was not completed.
407	HDCP) Hot Plug Error	The device to be connected is not connected.
408	HDCP) Ri Ready Error	The ready bit of the receiver was not set high.
412	HDCP) I2C Line Error	The I2C line is not working properly.
414	HDCP) Receiver Not HDMIMode	The connected device (receiver) was not set to the HDMI mode when the HDCP version was identified as 1.1 as a result of HDCP version:1.1 or HDCP version: EDID check.
415	HDCP) Ri NG	The values of Ri and Ri' do not match.
416	HDCP) FIFO Ready Time-out	FIFO Ready fails to occur within restricted time limit.
417	HDCP) DEPTH Error	The depth number has exceeded '7'.
418	HDCP) DEVICE_COUNT Error	The count number has exceeded '127'.
419	HDCP) List Error (V'!=V)	The values of V and V' do not match.

13.4 User-generated optional pattern-related error

Code (HEX)	Error message	Description
501	OPT Program Not Found	The user-generated optional pattern is not found.
502	Variables Stack Error	Variable stack error.
503	Register Stack Error	Register stack error.
504	Call Stack Error	Function stack error.
505	Illegal Instruction Code	Illegal instruction code.
506	Divide by Zero	An attempt was made to divide a number by zero.
539	OPT-USER License Error	The user-generated optional pattern license has not been supplied.



VG-870B / VG-871B

Instruction Manual

NOTICE

An incorrectly collated manual or a manual with missing pages will be replaced.

All copyrights pertaining to this product are the property of ASTRODESIGN.

This manual may not be copied in whole or in part without written permission.

The contents of this manual are subject to change without prior notice due to improvements.

The manufacturer will not be liable for any effects caused by incorrect operation.

All inquiries concerning this product should be addressed to your dealer or to the manufacturer at the contact numbers given below.

The products and product names mentioned in this manual are the trademarks and registered trademarks of the companies concerned.

T0170A

ASTRODESIGN, Inc.

URL http://www.astrodesign.co.jp

For more information, please contact us:

International Business Unit TEL.+81-(0)3-5734-6320 FAX.+81-(0)3-5734-6104 1-5-2 Minami-yukigaya,Ota-ku,Tokyo,Japan 145-0066