


BROADCAST

engineering


February, 1975/75 cents

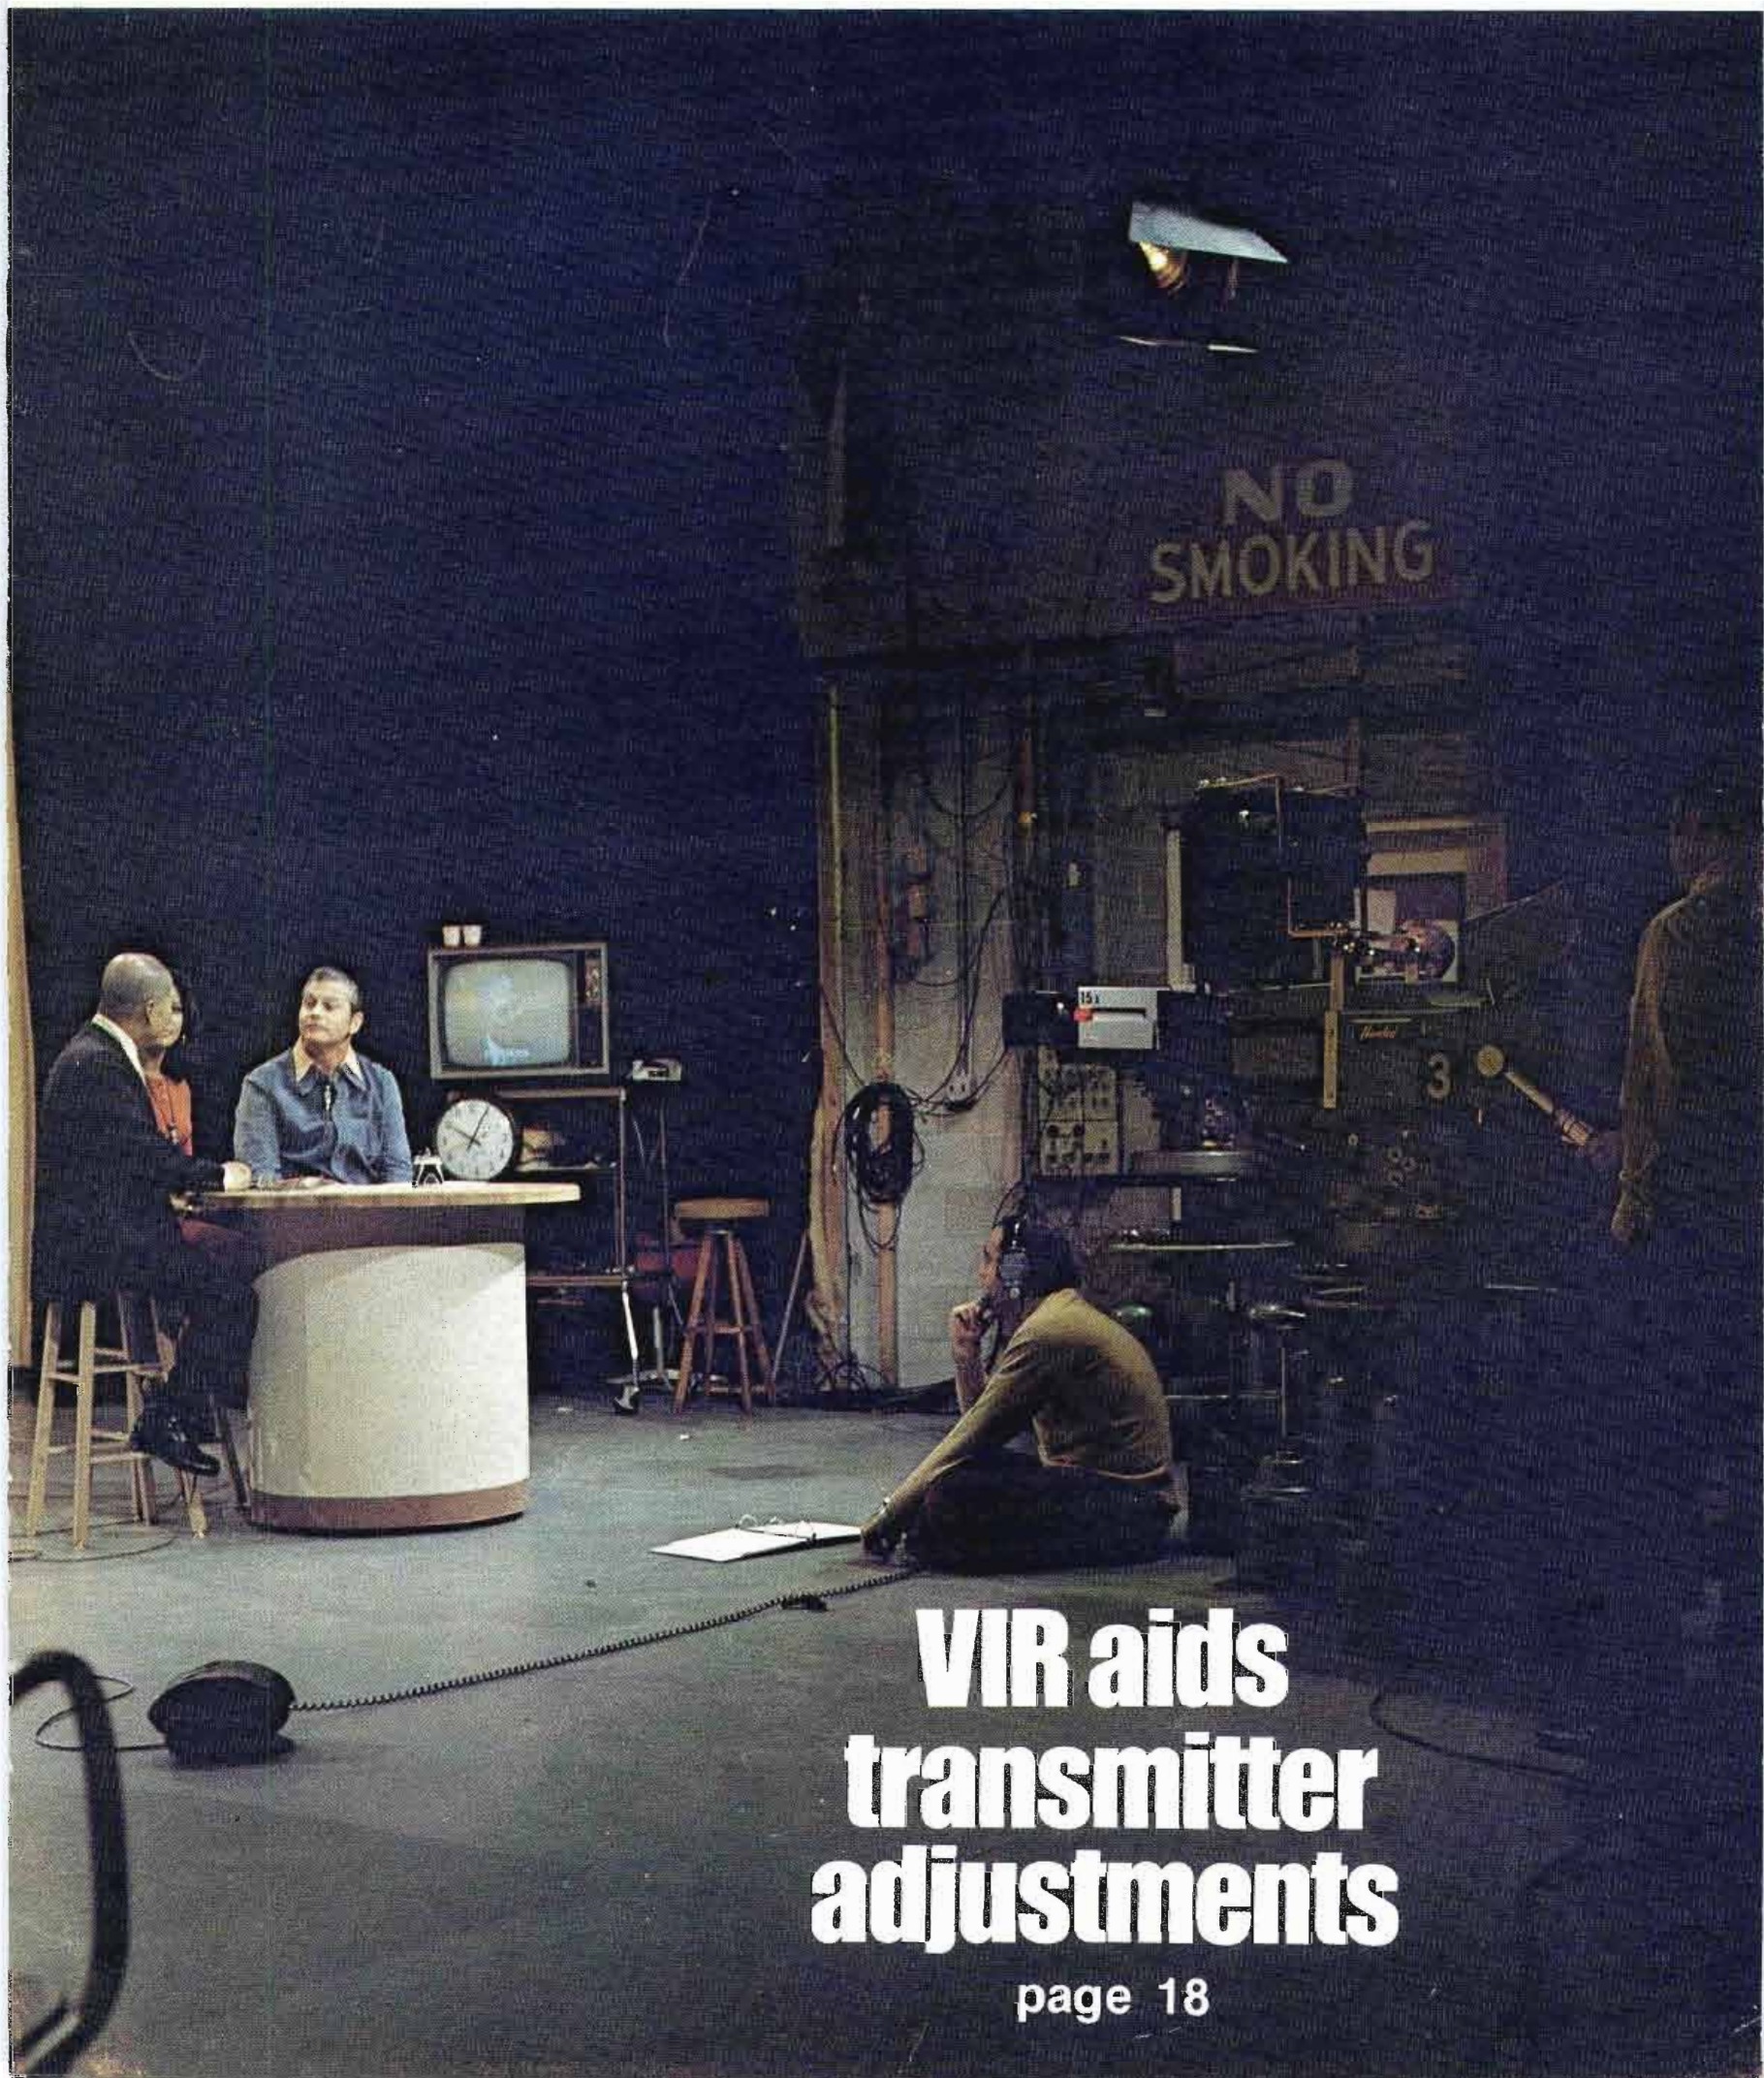


VIR aids transmitter adjustments

page 18

Flexible, solid-state audio switching NOW under \$10 per crosspoint.

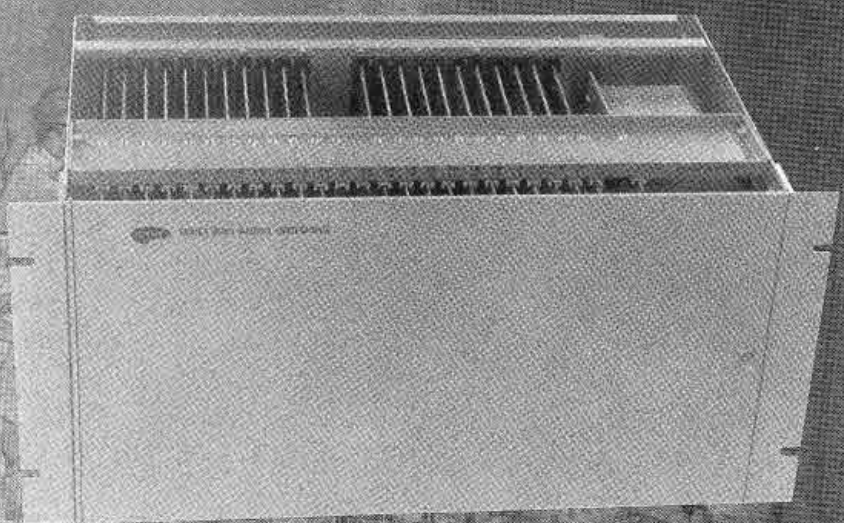

Input-output configurations are virtually unlimited with this modular, building-block, solid-state, audio switch. And . . . this flexibility comes at reduced cost.

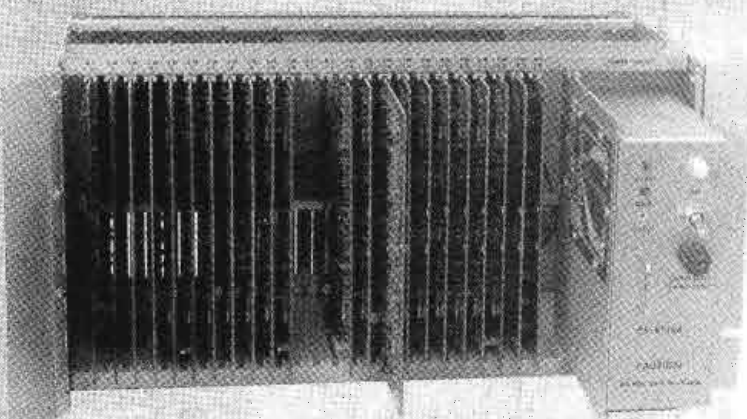

Starting with a single 8 $\frac{3}{4}$ -inch by 19-inch rack frame assembly, the user can build to a 20-input by 20-output configuration through selection of plug-in switching and amplifier boards.

Still using the same basic frame assembly, other configurations such as 20 by 5, 10 by 20 or combinations in between can be assembled. Greater capacities, including dual inputs or outputs, are just as easy . . . just add.

Control? . . . a snap! pushbuttons, thumbwheels, dials, touch pads . . . even a computer.

Performance is outstanding. Using field effect transistor switching and integrated amplifiers, the Series-8100 handles -6 to +8 dBm levels through its balanced transformerless inputs. Flat within ± 0.15 dB (20 Hz to 20 kHz) ± 1.0 dB (1 Hz to 50 kHz), crosstalk (better than 70 dB below output), harmonic distortion (less than 0.15%) and hum and noise (85 dB below maximum output) the 8100 compromises nothing for its flexibility.


Best of all, users will really appreciate the economy. By specifying the initial capability for any remotely-controlled, switched audio distribution network, the buyer saves now and isn't penalized later. High reliability solid-state audio switching costs can be cut to as little as \$10 per crosspoint . . . significantly less than competitive switching systems.

Write today for complete details to home office or eastern region office — P. O. Box 17342, Dulles International Airport, Washington, D. C. 20041; telephone (703) 471-4078.

DYNAIR ELECTRONICS, INC.
6360 FEDERAL BLVD., SAN DIEGO, CA. 92114
PHONE: (917) 582-9211; TWX: (910) 335-2040



For More Details Circle (1) on Reply Card



THE FIRST 400 DAYS.

A progress report on the RCA Satcom System. America's first operational domestic communications satellite system.

On December 21, 1973, RCA Globcom's Satcom System became operational and substantially reduced the cost of coast-to-coast communications.

Today, the Satcom System's private, voice-grade leased channels are providing a proved, cost-effective alternative to overland cable and microwave circuits.


This is only the beginning.

Later this year, RCA Satcom Phase II will begin

with new earth stations, an advanced design, high-capacity satellite (shown below), and extended service to the entire United States. This service will include applications for TV and CATV transmission, full transponder systems and special services for government and industry.

For information on how the RCA Satcom System can benefit your company, contact Satcom Marketing, RCA Global Communications, Inc., 60 Broad Street, New York, New York 10004. Phone: (212) 363-3986.

RCA Global Communications

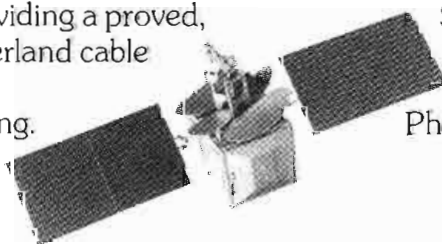

For More Details Circle (2) on Reply Card

18 VIR signals aid transmitter adjustments

...A report on how one station is using these signals and special equipment to eliminate adjustments and get consistent color. **Archie Bruschi.**

26 Challenging test tapes and records...BE

runs a series of tests looking for ways to improve signal quality by test tapes and test records. The article includes notes on equipment and test tape and record distortion. **Dennis Ciapura.**

36 Avoid confusion with status lights...

BE's maintenance editor describes a number of situations where status lights would aid station operations. Includes examples of circuits connections in typical applications. **Pat Finnegan.**

42 Digital math workshop...Last part in a

series of articles on digital math that are designed to help engineers understand digital circuits. This last part includes a number of test exercises and answers. **Harold Ennes.**

About the cover

The cover photo was taken at WCVB-TV, Boston. The key is color, and our article on page 18 tells how the VIR signal can be used to keep color adjustments under control. (Photo courtesy Philips Bdcst. Equip. Corp).

Departments

Direct Current	4
News	8
SBE Journal	12
Cable Engineering	CE-1
People In The News	48
New Products	49
Ad Index	58
Classified Ads	59

EDITORIAL

Ronald N. Merrell, *Director*
Carl Babcoke, *Technical*
Pat Finnegan, *Maintenance*
Howard T. Head, *FCC Rules*
Robert A. Jones, *Facilities*
Walter Jung, *Solid State*
Lee Van Lammeren, *Editorial Assistant*
H. G. Roesler, *Cartoonist*
Dudley Rose, *Graphic Designer*
Joe Roizen, *Video*
Archer Taylor, *CATV*
Dennis Ciapura, *Consulting Author*

EDITORIAL ADVISORY BOARD

Les Nelson, *Chairman*
Howard W. Sams & Co., Indianapolis

CIRCULATION

Evelyn Rogers, *Manager*

ADVERTISING

E. P. Langan, *Director*
R. Jack Hancock, *Manager*
Cris Barnes, *Production*
Jake Stockwell, *Sales*

Regional Advertising Sales Offices on
Advertisers' Index page



Broadcast Engineering is published monthly by Intertec Publishing Corp., 1014 Wyandotte Street, Kansas City, Missouri 64105. Telephone: (913) 888-4664

Broadcast Engineering is mailed free to qualified persons engaged in commercial and educational radio and television broadcasting. Non-qualified subscriptions in the U.S. are \$6.00 one year, \$10.00 two years, \$13.00 three years. Outside the USA add \$1.00 per year to cover postage. Single copy rate 75 cents. Back issues rate \$1.00. Adjustments necessitated by subscription termination at single copy rate.


Controlled Circulation postage paid at Indianapolis, Indiana.



Robert E. Hertel, *Publisher*

INTERTEC PUBLISHING CORP.
Subsidiary of HOWARD W. SAM & CO., INC.

Copyright, 1975, Howard W. Sams & Co., Inc. All Rights Reserved: Material may not be reproduced or photocopied in any form without written permission of publisher.

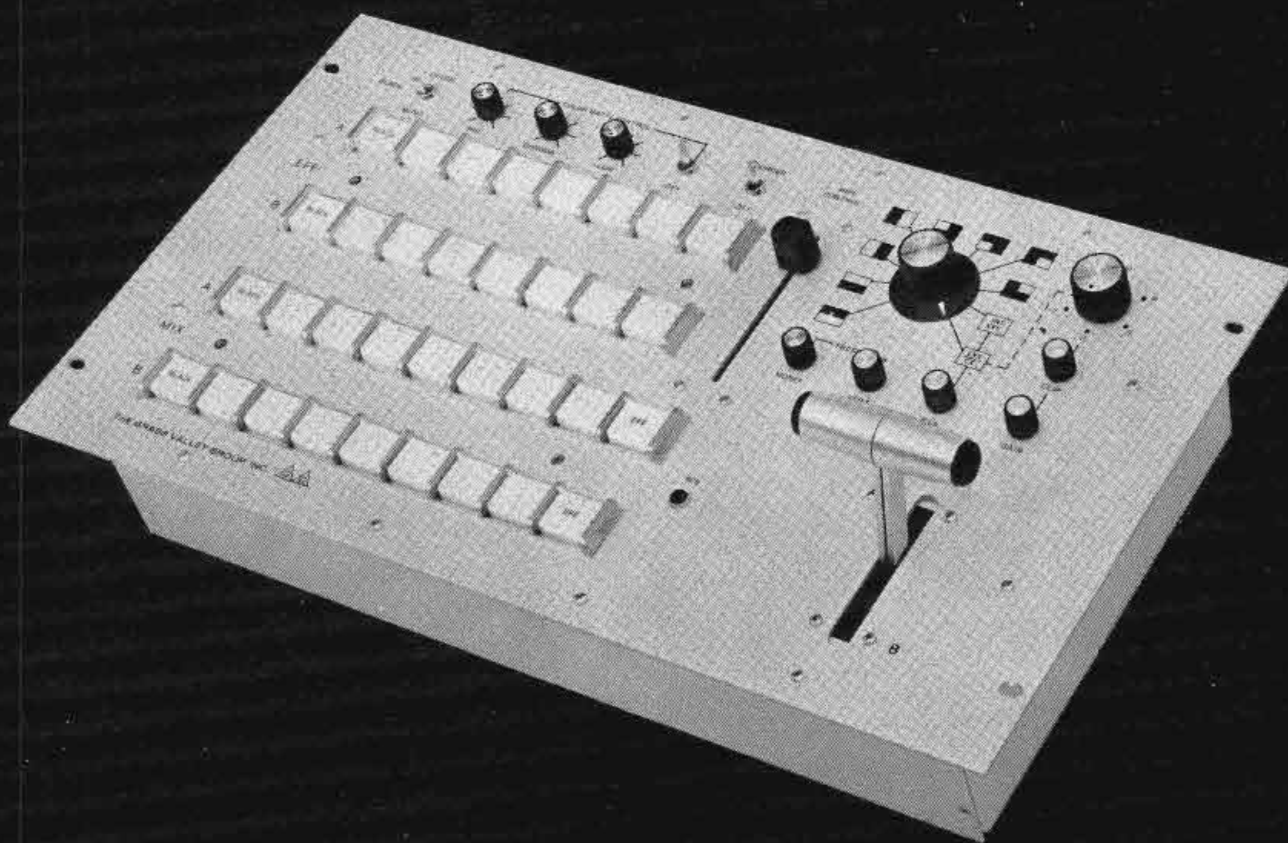

MODEL 1400-12 VIDEO SWITCHER

*PROFESSIONAL PERFORMANCE
IN SMALL FORMAT*

With over 100 switchers now in service, the reputation of Grass Valley Group's Model 1400-12 switching system is now firmly established. The switcher provides the same type of features you expect in a high-quality studio system. For example: Clamped vertical interval switching, remote controlled matrix, internal/external keying and matte, bordered wipe patterns, and accurate color timing.

Available options include chroma key, color black/matte generator, Borderline, non-sync inhibit, automatic sync-add inputs, and an AFV system. Model 1400-12 is available in NTSC, PAL, and PAL-M versions.

For additional information, call or write the Grass Valley Group, Inc.

THE GRASS VALLEY GROUP, INC. 

A TEKTRONIX COMPANY

Station Plaza East
GREAT NECK, NY 11021
(516) 487-1311

4419 Van Nuys Blvd, Ste 307
SHERMAN OAKS, CA 91403
(213) 990-6172

1644 Tullie Cir, NE
ATLANTA, GA 30329
(404) 634-0521

P.O. Box 482
MABANK, TX 75147
(214) 887-1181

810 W Bristol Street
ELKHART, IN 46514
(219) 264-0931

DIRECT CURRENT FROM D. C.



February, 1975 / by Howard T. Head

Home Radio Warning System Selected

The White House Office of Telecommunications Policy (OTP) has announced a new policy respecting home radio warning systems for communicating attack or disaster warnings directly to the general public. Under the new policy, the National Weather Service VHF/FM forecasting and warning system (weather radio) will be the only Federal Government radio system employed for this purpose.

This system incorporates a special tone-alert signal. Already on the market are home receivers which can be activated automatically by this tone signal at the option of the receiver owner. OTP has expressed the hope that mass production of these receivers will bring the cost "within the reach of every American Citizen."

The National Weather Service transmitters operate either on 162.4 MHz or 162.55 MHz generally with a power of 1000 Watts. A service range of 40 miles is expected. There are 70 stations now in operation in the larger metropolitan areas with a network of 350 stations ultimately planned. The completed system is expected to make coverage available to 90% of the U.S. population. The projected cost of the completed system is around 3 million dollars, and the target date for completion is the end of 1977.

The new OTP policy does not affect the existence or operation of the Commission's Emergency Broadcast System (EBS). EBS will continue in operation, but OTP considered it to be unsuitable for a national attack and disaster warning system, since even its target response time of five minutes was considered inadequate, and as a practical matter, EBS response times are often much longer, even when the system works.

Commission Criticized on Operator Exams

The North Carolina Association of Broadcasters (NCAB), in a recent filing with the Commission, has told the FCC that its operator's study guide does not adequately prepare students for the actual examination for a Third Class Operator's permit. Stating that "fundamental fairness requires that there be a reasonable correlation between the official study materials" and the

(Continued on page 6)

None for the money...

or even MORE money, compare with the Sparta Studio/Remote Audio Control Centers. They are classed by themselves in providing **complete** production-and-remote broadcast facilities, as we discovered when we tried to measure up "competing" units. Which is probably why

even our competitors sometimes buy them!

Instead of offering the familiar comparison of our equipment **versus** others' in this space, in all fairness we can only list some features of ours and let you try to find an equal... we cannot.

Sparta
AC155B/
ASC305B Any
Other
Maker?

- | | | |
|-------------------------------------|--------------------------|---|
| ☒ | ☐ | 5-Mixer mono (AC155B) with 14 inputs |
| ☒ | ☐ | 5-Mixer Stereo (ASC305B) with 9 inputs |
| ☒ | ☐ | Pushbutton multiple input selector |
| ☒ | ☐ | Studio quality audio performance |
| ☒ | ☐ | Console removable battery-operable |
| ☒ | ☐ | Four selectable outputs, plus earphones |
| ☒ | ☐ | Monitor speaker built-in |
| ☒ | ☐ | Cue (all mixers) to built-in speaker |
| ☒ | ☐ | Muting standard |

Sparta
AC155B/
ASC305B Any
Other
Maker?

- | | | |
|-------------------------------------|--------------------------|---|
| ☒ | ☐ | Custom instant-start turntables |
| ☒ | ☐ | Micro-balanced tone arms |
| ☒ | ☐ | Furniture-grade cabinetry |
| ☒ | ☐ | Matching utility shelf accessory |
| ☒ | ☐ | Matching bench-&-lid accessory |
| ☒ | ☐ | Lift-leaf table extension |
| ☒ | ☐ | Designed to do two jobs interchangeably and perfectly! |
| ☒ | ☐ | So reasonably priced that do-it-yourself can't compete! |



Sparta's innovation leadership in creating these Studio/Remote Centers of outstanding utility speaks for comparing **all** Sparta professional broadcast equipment against **any** other.

We want you to write or call us collect for the Sparta information you need to consider in any new equipment decisions.

We're in the business of You.



SPARTA
ELECTRONIC CORPORATION

5851 Florin-Perkins Road, Sacramento, Ca. 95828
(916) 383-5353 • Telex 377-488 • Cable SPARTA
a Subsidiary of Cetec Corporation

(Continued from page 4)

examination, NCAB pointed out that in the last eleven months, 107 of 125 North Carolina applicants had failed the test for the Third Class permit. The Association went on to say that "this is a matter of particular concern to broadcasters who are trying to seek out and extend new employment opportunities to minorities."

New TV Propagation Curves Still in Limbo


As the case nears its entry into its second decade, the Commission continues to debate the matter of the adoption of new field strength vs. distance curves to be employed in predicting the coverage areas of TV broadcast stations. Although it has long been known that the "official" curves contained in the Commission's broadcast Rules predict service ranges for UHF TV stations generally larger than are ordinarily realized in actual practice, the Commission and the broadcasting industry have been unable to agree on replacements for the curves which are now part of the Broadcast Rules and Regulations.

A family of curves developed in 1965 was objected to by broadcast engineers on the grounds of inaccuracy, and these curves were revised a year later, although in the face of some continued objection. About this time, TV broadcast licensees woke up to the fact that almost all stations would have their coverage contours shrunk by the use of the new curves, and the UHF stations would be much more seriously affected by this reduction. Even this realization generated little concern, since most TV stations rely on audience surveys to determine actual viewing.


The increasing penetration of CATV systems, however, caused many stations to take a closer look at the matter, since the coverage and non-duplication rights of broadcasting stations carried on cable systems are established in terms of the coverage contours. In the hope of making the new curves more palatable to broadcasters, the Commission proposed in 1971 to make a further change in the contour distances, by redefining the values of field strength required to provide a given grade of TV broadcast service. These proposed changes likewise ran into industry opposition.

FCC Chairman Dick Wiley is anxious to clear up all pending cases, including this one, and the debate at the Commission continues. Broadcast stations, especially those on UHF channels, want maximum carriage and non-duplication rights from cable systems, while cable systems would prefer to exercise their own option as to which stations are carried. The Commission has considered a possible substitution of a system of fixed mileages to determine carriage and non-duplication rights, but this proposal has also run into disagreement. At this writing, the Commission has tabled the matter, still hoping to find some solution that will fly.


THE ADC 1100

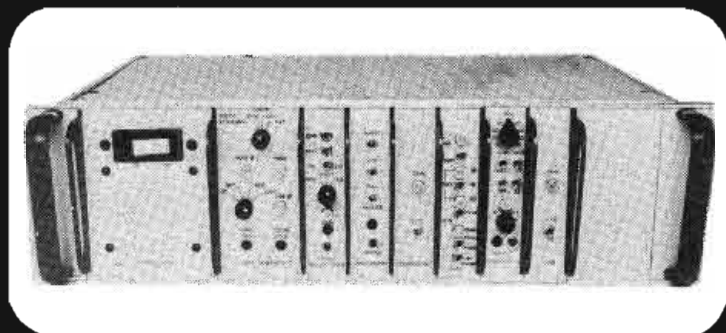


MASTER VIT TEST SETS

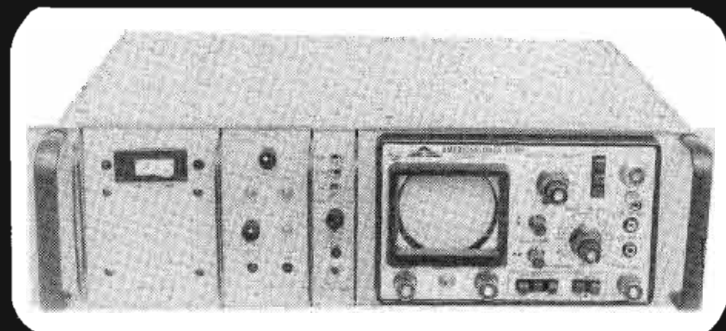


COMBINATION TEST SETS

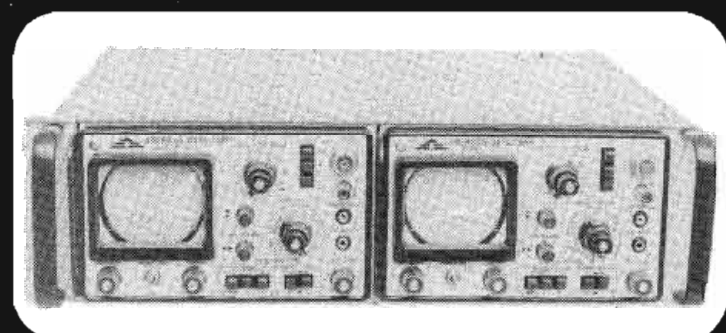

WAVEFORM MONITORS

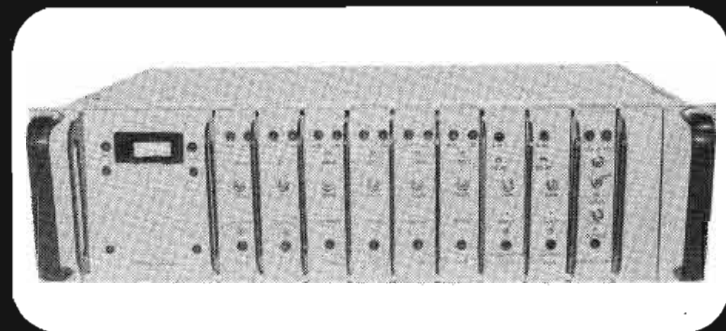

DISTRIBUTION AMPLIFIERS

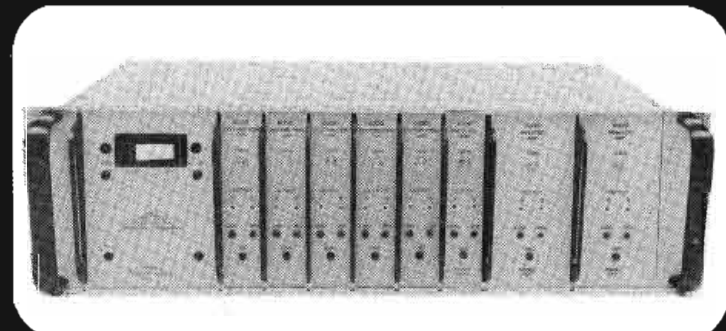

AUDIO AMPLIFIERS

A state of the art system of test equipment, master sync generators and distribution amplifiers designed to let the user build a system to fit current needs and *expand* on the same system as requirements grow. The 1100V frame is common to *all* video, pulse, test and sync modules and the 1100A is common for *all* audio modules.

1100 series modules currently available:

1100V/A	Video/Audio Frame
1101V/A	Video/Audio Power Supply
1102	Digital Sync Generator
1103	Color Standard
1104	Color Sync Lock
1105	Black Burst/Bar-Dot Generator
1106	Automatic Sync Changeover
1107	Module Extender
1108	Staircase Generator (linearity)
1109	Multiburst Generator
1110	Sine ² Pulse and Bar Generator
1111	Encoded Color Bar Generator
1112	Video Distribution Amplifier
1113	Differential Input VDA
1114	Pulse Distribution Amplifier
1115	Pulse Delay Amplifier
1116	VITS Composite Test Signal Generator
1117	VITS Delete/Insert
1119	Audio Distribution Amplifier
1120	Audio Preamplifier
1121	Audio Monitor Amplifier
1122	Subcarrier Distribution Amplifier
1124	Waveform Monitor
1129	VIR Signal Generator



AMERICAN DATA CORPORATION

AN AIRPAX COMPANY

315 WYNN DRIVE, N.W. P. O. BOX 5228 HUNTSVILLE, ALABAMA 35805 TEL. 205-837-5180

ADC SOUTHEAST
205-837-5180

ADC SOUTHWEST
713-941-7272

ADC MID-ATLANTIC
301-460-1454


ADC NORTHEAST
617-237-2600

ADC WEST
213-387-7756

For More Details Circle (4) on Reply Card

COMTEC**COMMUNICATIONS
TECHNOLOGY, INC.****ROUTING SWITCHERS FOR
EVERY REQUIREMENT****15X****REPLACES PATCH PANELS
VIDEO/AUDIO**

- ★ Plug-in Construction
- ★ Local or Remote
- ★ 12 or 15 Inputs
- ★ LED Status Indicators




12x6	\$2535
12x12	\$4485

15x6	\$3075
15x12	\$5440

RX**REMOTE CONTROL FOR BROADCASTERS
VIDEO/AUDIO**

- ★ Plug-in Modular Const.
- ★ Momentary Pushbuttons
- ★ LED Indicators
- ★ Input-Output Amps
- ★ Optional Vert. Int.

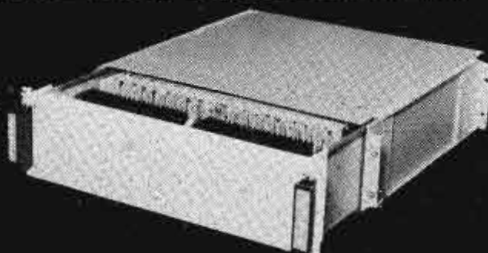


12x5	\$3747
12x10	\$5630

16x5	\$4470
16x10	\$6740

20X**THE ULTIMATE**

- ★ 20x10 Matrix W/P.S.
- ★ 5 Level Switching
 - 1—Video, 2—Audio &
 - 2—bi-directional auxiliary
- ★ Breakaway Audio
- ★ Memory — CMOS Logic
- ★ Any Type Control

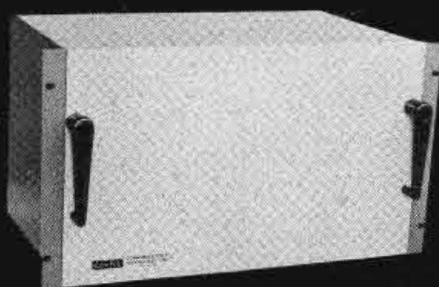

20x10 Audio/Video W/P.B. Control	\$10,560
-------------------------------------	----------

SINGLE CHANNEL SWITCHERS

15X-1	12 or 15 Inputs-Video/Audio	12 In	\$695
		15 In	\$795
20X-1	20 Inputs-Vert. Int.-Custom Control Similar Features of 20X P.B. Remote Control		\$1295
AX	Audio Switchers as Low as		\$12.00/Xpt.

QUALITY AT A PRICE EVERYONE CAN AFFORD!*Send For Brochures & Price List***COMMUNICATIONS TECHNOLOGY, INC.**

4306 GOVERNORS DRIVE S.W. • HUNTSVILLE, ALABAMA 35805

205-837-7340

INDUSTRY NEWS**TV cameramen
form societies**

TV cameramen will be pleased to learn that there is an organization prepared to give special attention to them: The American Society of TV Cameramen, Inc. As reported in an earlier edition, there is also a second group called The Guild of Television Cameramen. This later group is headquartered in England.

Unfortunately, most cameramen around the world, as well as in the U.S., have not been aware of these two organizations. Now it appears, as a result of publishing something on the existence of the Guild, that the two apparently have common goals. Since there is now communication between the two, it may result in a melding of the two into an international organization.

For further information on the American Society, we suggest U.S. cameramen correspond directly with Robert Zweck, ASTVC President, Box 1189, Radio City Station, New York, N.Y. 10019.

**Remote services
could be problem**

The NAB has vigorously opposed a request by business and educational radio to share the 450 and 455 MegaHertz bands presently allocated for broadcasting's remote pickup services.

In comments urging the Federal Communications Commission to dismiss the proposal, NAB said it's an effort "to wrest additional frequencies" essential to high-quality broadcasting merely "to satisfy the nebulous demands of the Land Mobile Services."

NAB said the business/education radio filing "is fraught with ambiguities, half-truths and, above all, a total lack of understanding as to the intended purpose of the Remote Pickup Broadcast Service."

"Remote pickup frequencies are a programming tool and not a business convenience," it said.

For More Details Circle (5) on Reply Card


BROADCAST ENGINEERING

32-25 log θ

AVAILABLE NOW . . PROVEN IN SERVICE 4.5 METRE EARTH STATION ANTENNA

- Measured patterns meet CCIR/FCC (32-25 log θ) requirements
- 4/6 GHz receive/transmit
- New high efficiency feed (patent pending)
- G/T of 30.47 dB at 30° elevation
- Universal mount
- Quick - easy - manual erection - no crane required

Full details on this and other sizes in Bulletin 1072.

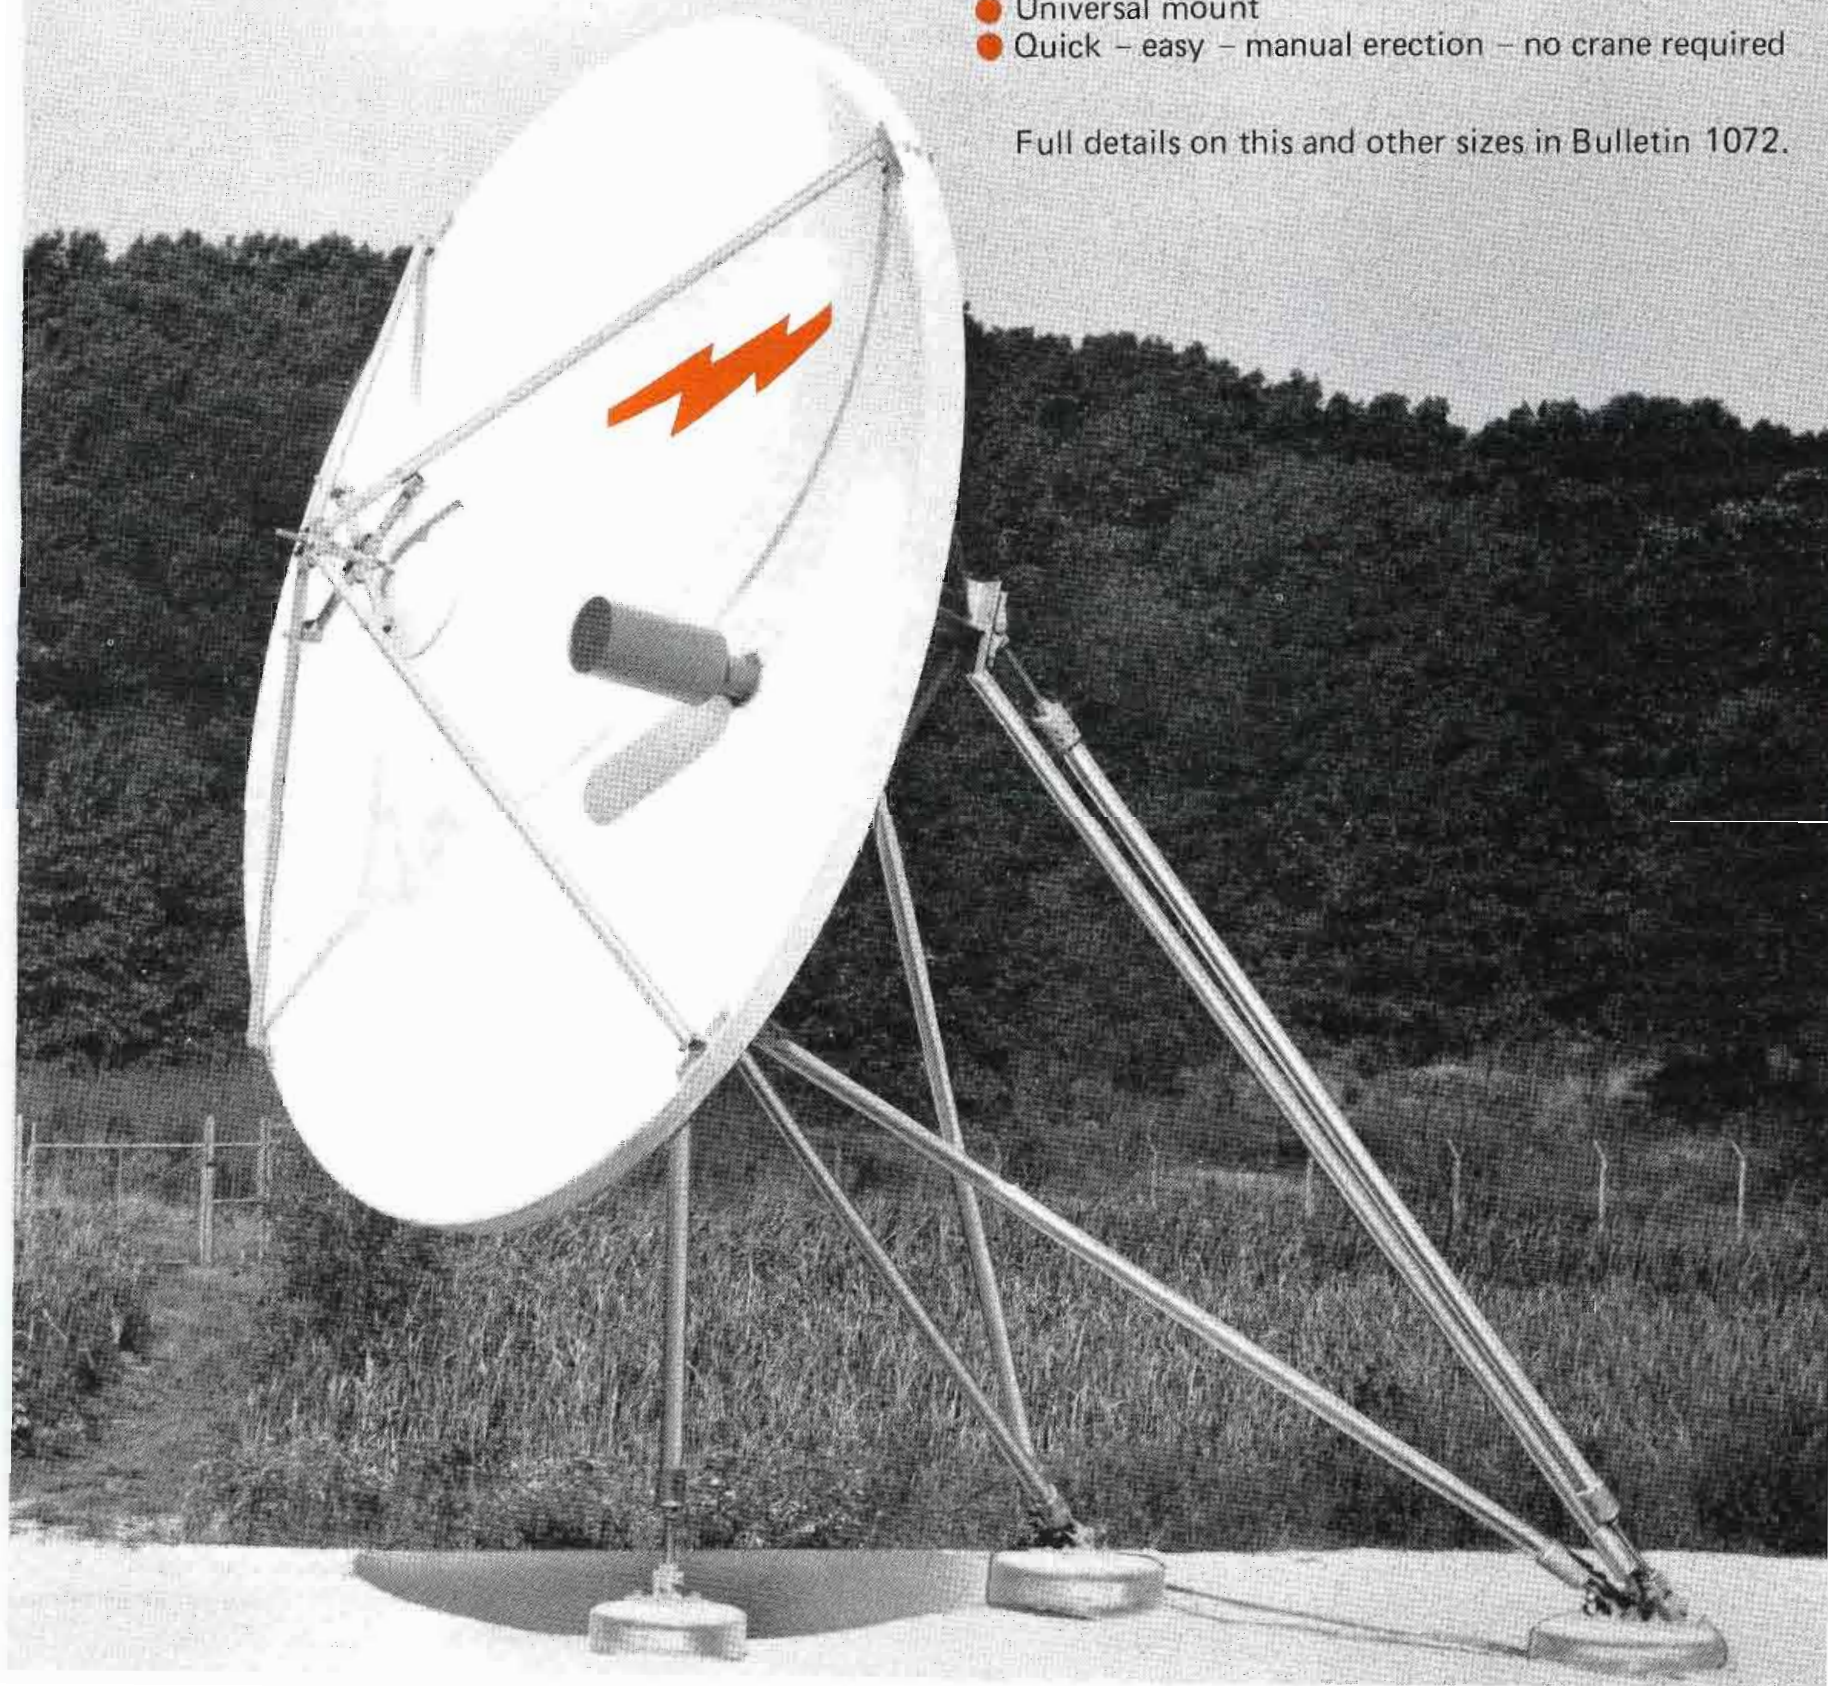

ANDREW

ANDREW CORPORATION 10500 W. 153rd St., Orland Park, IL., U.S.A. 60462 Telephone: (312) 349-3300

ANDREW ANTENNA COMPANY LTD. 606 Beech St., Whitby, Ontario, Canada L1N 5S2 Tel: (416) 668-3348

ANDREW ANTENNA SYSTEMS Lochgelly, Fife, Great Britain KY5 9HG Telephone: (0592) 780561

ANDREW ANTENNAS 171 Henty St., Reservoir, Victoria, Australia 3073 Telephone: (03) 460.1544

ANDREW ANTENAS LIMITADA Av. Brigadeiro Faria Lima, 830s/64 Caixa Postal 22.252, 01452 São Paulo, Brasil Tels: 210-2808, 211-5132

For More Details Circle (6) on Reply Card

"Operation Re-regulation"

NCTA will sponsor two "Operation Re-regulation" conferences for cable operators and representatives of Congress and federal agencies in March.

Expanded versions of the NCTA Legislative Conferences held the past two years, the conferences are designed to acquaint law makers and policy makers with cable

industry positions on current legislative and regulatory issues.

Cable operators from the Eastern half of the country will attend the first conference, March 2-4. Operators from the Western states will attend the March 16-18 meeting. Both conferences will be held at the L'Enfant Plaza Hotel in Washington, D.C.

NAB asks for fee refund

The National Association of Broadcasters is demanding that the Federal Communications Commission refund to broadcasters millions of dollars in annual fees.

Its filing with the FCC points that the Supreme Court held that its decision invalidating annual fees for cable television also applied to broadcasters; that the FCC itself conceded this in cancelling fees for cable, and argued that failure to refund broadcast fees would constitute "arbitrary and invidious discrimination."

NAB's petition said that in view of the Supreme Court decision and FCC's announced intention to refund cable fees, broadcasters are entitled to "equal treatment" under the law.

NAB also noted that the high court held that regulated industries also perform a public service and should only be assessed for the benefits they derived and the assessment of annual fees meant that "CATV's and other broadcasters would be paying not only for benefits they received but for the protective services rendered to the public."


The NAB petition said the FCC itself "conceded the impropriety of the existing annual broadcast fee" by noting that the Supreme Court ruling "raised certain basic questions" about its schedule of annual fees.

"Since the standard utilized by the Commission in setting the cable fees was arbitrary and unlawful," NAB's petition said, "the same would hold true for that upon which the broadcast fee was premised."

"A disparate treatment between the cable and broadcasting industries...would invoke evidence of arbitrary and invidious discrimination."

"NAB submits, therefore, that as a result of the NCTA (Cable) decision and the determination to refund annual cable fees, the Commission is now obligated at law to respond to broadcast petitions for annual fee refunds in a like manner."

Schafer IS RADIO AUTOMATION!

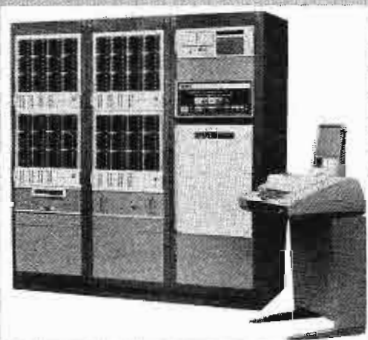



700 SERIES COMPUTERS

You can't outgrow a Schafer/NTI 700 system with integral computer! Each 700 is totally modular and may be expanded at any time to provide virtually unlimited storage and programming control. From the smallest 730 to the ultimate 770, each Schafer/NTI computer system offers standard features not available on any other system at any price. To prove it, we have a new brochure that outlines the capabilities of all the 700 computer models. Why not send for it and see for yourself... YOU CAN'T OUTGROW A SCHAFER/NTI 700 COMPUTER.

900 SERIES CONTROL UNITS

Pictured is the Schafer 903 time-oriented MOS Memory system with 24 hour (or up to 7 days) advance programming capability. More features are standard equipment on the 903 than on any other comparably priced system. Automatic Memory loading and Verified Encoded Logging are available, too.

The Schafer 902 is the goof-proof system. 48 format sequence thumbwheels make the 902 the ultimate in simplicity. Add a Random Access 2000-step MOS cartridge programmer, and you have the most flexible low-cost automation system in the world.

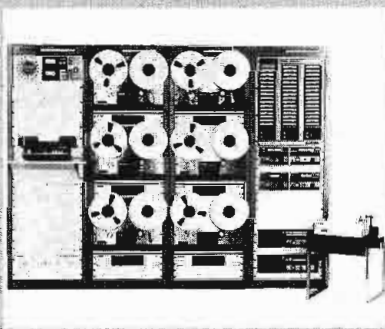

THE AUDIOFILE

THE random-access cartridge system you've been waiting for! The AUDIOFILE is all solid-state, fast, and has audio quality equal to the best single-play cart machines. Use it in your automation system, or with DJ control in your studio. THE NEW STANDARD IN MULTIPLE CARTRIDGE MACHINES... The AUDIOFILE. Exclusively from Schafer.



Don't forget... Schafer is the one-stop source for all your equipment requirements. When you need studio equipment or transmitting gear, automation or Audiofiles, reel-to-reel or cartridge recorders, consoles or turntables, transmitters or antennas, remember... SCHAFER HAS IT ALL.

Schafer

SCHAFFER ELECTRONICS CORPORATION
75 Castilian Dr.
Santa Barbara Research Park
Goleta, California 93017

Name _____
Station _____
Address _____
City _____
State _____ Zip _____

For More Details Circle (7) on Reply Card

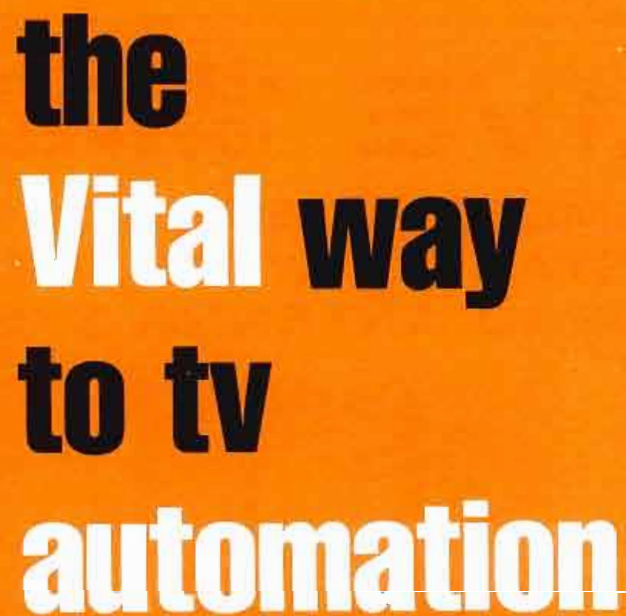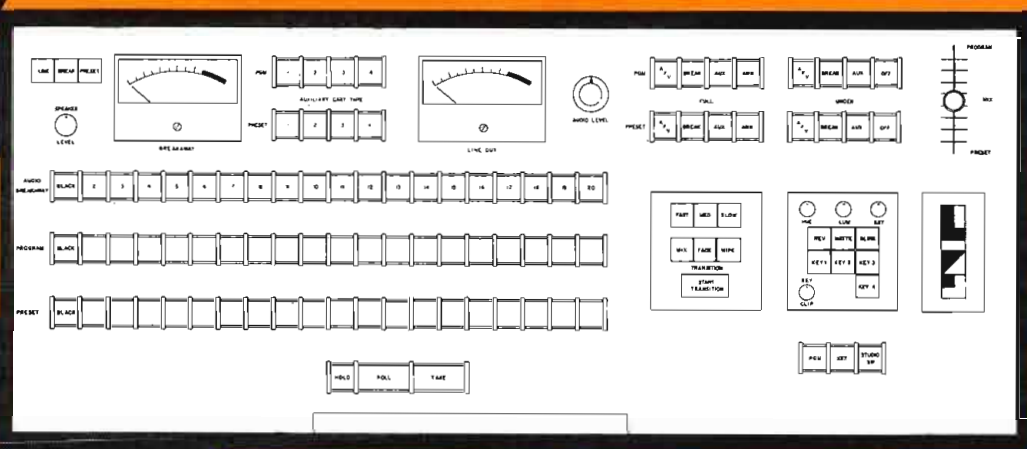

- Complete logging facilities for management and FCC purposes
- Manual override always "hot"
- Power failure protection
- Complete plant communications with auxiliary monitors
- Full spectrum of equipment can be controlled in any configuration and quantity
- Events on-air—by real, elapse, duration or cue time, plus manual
- Two automation systems in one: on-air plus 8 programmable selections for microwave switching, VTR's into record, etc.
- Optional mass data storage available for advanced scheduling from 27 events to one year

Make Vital Industries, Inc. your single responsible source for your total system needs.

MAIN OFFICE: 3700 N.E. 53rd Ave., Gainesville, Fla. 32601 - Phone 904/378-1581






SOCIETY OF BROADCAST ENGINEERS, INC.
P O Box 88123 Indianapolis, Indiana 46208

Broadcast Engineering magazine provides this means whereby the members of the Society of Broadcast Engineers can report on SBE chapter meetings, announce future events, and have articles, papers, and other technical and nontechnical items published.

Chapter chairmen should see that information on meetings and other news is sent promptly, as soon as it is available, to the SBE Editor, Joe Risse, P.O. Box 131, Dunmore, Pa. 18512. Include photographs whenever available; preferred photograph size is 8 x 10, but smaller sizes are also usable.

The deadline for submitting copy to the SBE Editor is the 25th of the second month preceding publication.


(Continued on page 14)

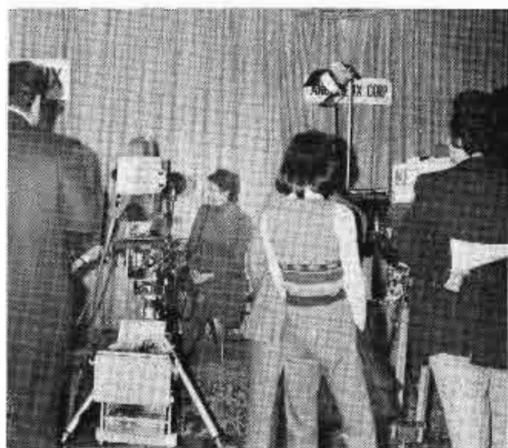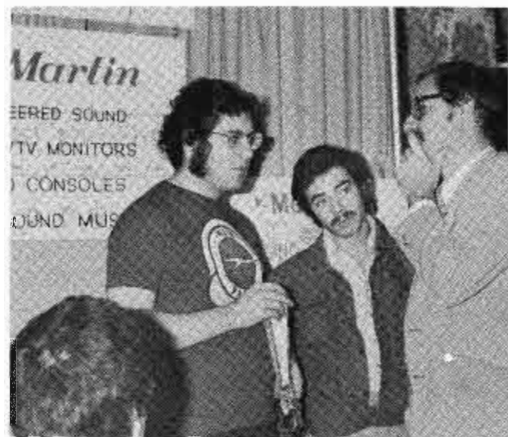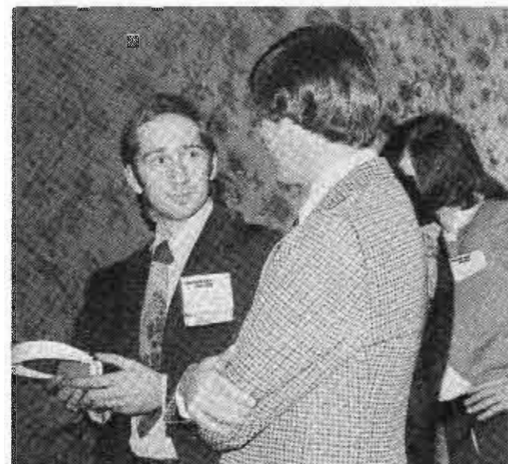

These pictures were taken at the mini-convention sponsored by the New York Chapter. SBE has been successful with their mini-convention mainly because the Chief Engineer - the chief buying influence - heads the list of attendees. However, these conventions also have included key sessions with industry heads covering important industry issues.

LIVE ELECTRONIC JOURNALISM

REMOTE-TV BROADCASTS INSTANTLY WITH THE NEW NURAD ANTENNA SYSTEMS

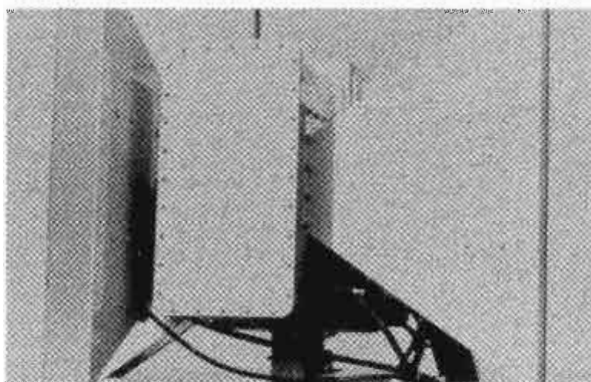

NURAD MODEL 20 QP 1

NURAD QUAD POLARIZED ANTENNA SYSTEMS FOR THE 2.0 GHz and 7.0 GHz MICROWAVE BANDS OFFER THE

FOLLOWING FEATURES:

- Unattended operation with remote control.
- Rejects multi-path signals when used in the circular polarized mode.
- Remote transmit antenna set-up time reduced to minutes.
- No "Microwave Survey" required.
- Eliminates the use of rotational components or adjustments.
- Operational even with obstructions in normal transmission path.
- High gain for long range operation.

For further information contact:



NURAD
INCORPORATED
2165 DRUID PARK DRIVE
BALTIMORE, MARYLAND 21211
AREA CODE 301-462-1700

For More Details Circle (9) on Reply Card

TV Station Executives...

EIMAC's 1975-model 8963 TV triode saves you money six ways.

When you purchase your new TV transmitter with EIMAC's 8963 the new 25 kW power triode, you benefit six ways: **1.** The 8963 saves 1200 watts per hour in filament and screen power over a tetrode. That's over \$250 a year in your pocket*. **2.** The new-design ripple fin radiator of the 8963 gives better and quieter cooling with reduced blower power requirements. **3.** The 8963's cool cathode and husky grid structure mean lower internal temperature and increased reliability. **4.** Simple triode circuitry reduces components and results in less downtime and failures. **5.** EIMAC's 3,000 hour warranty is a potential savings on tomorrow's tube replacement cost. **6.** The 8963 gives you the gain and performance of a tetrode with the economy and circuit stability of a triode.

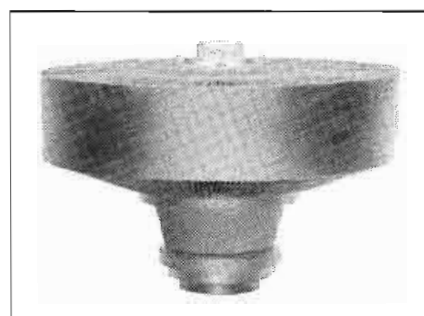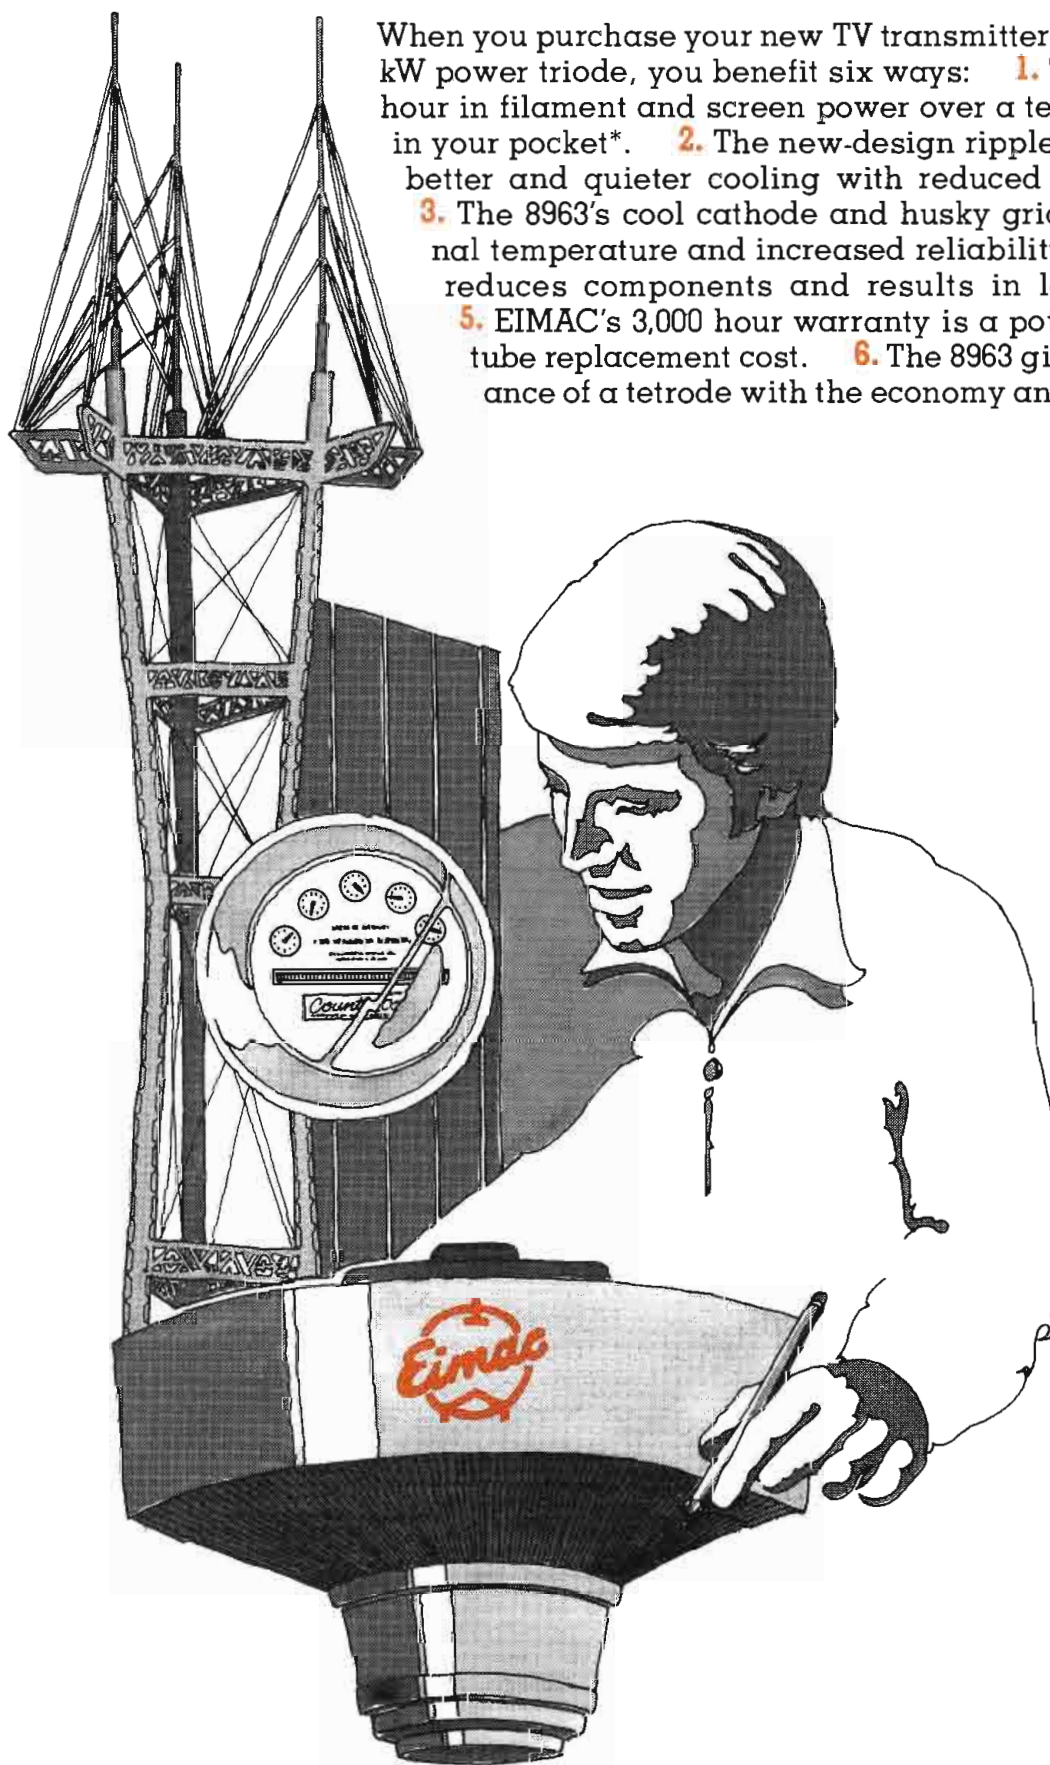

Put dollars in your pocket and enjoy improved transmitter reliability with the EIMAC 8963. For complete details, ask your TV equipment distributor or write EIMAC, Division of Varian, 301 Industrial Way, San Carlos, California 94070. Or contact any of the more than 30 Varian/EIMAC Electron Device Group Sales Offices throughout the world.



*Based on an 18 hour transmitting day at 3¢ per kWh—and rates are going up (Business Week, Oct. 5, 1974).

For More Details Circle (10) on Reply Card



State-of-the-art performance. It's made TFT a leader in AM and TV monitoring. And, now, it's available in a complete line of FCC type-approved FM monitors. Choose from two baseband units — Frequency and Modulation (Model 723) or Modulation Only (Model 734) — plus stereo and SCA!

Like all TFT monitors, the FM line is tailor-made for remote operation. For one thing, you don't need an RF amplifier to drive the baseband monitor. So, you get an exceptionally clean demodulated signal.

Furthermore, you don't have to give TFT monitors much after-installation attention. The Model 723, for example, doesn't need periodic calibration because its stability is ± 100 Hz per year. Other features that make TFT monitors ideal for remote include: digital (BCD) or optional analog logging outputs, and several alarm options: Carrier-Off, Loss-of-Modulation, and Off-Frequency.

Advanced design techniques are hallmarks of all TFT instruments. In the stereo monitor, for example,

phase lock loop circuits ensure superior, highly stable separation measurements. Another example is the use of crystal filters in the SCA monitor to provide excellent selectivity.

Frequency synthesizer design is another TFT advantage. And, the Model 723 can be calibrated directly against NBS, using a TFT Model 735 WWV Receiver.

In addition, the precise accuracy needed for measuring peak modulation is provided by digitally settable peak flashers that display plus and minus peaks simultaneously. This is standard, both on the baseband monitors and on the SCA unit.

All TFT monitors meet applicable FCC requirements, and baseband units have high level inputs for direct transmitter hook-up. This allows you to make all necessary proof-of-performance measurements.

For a demonstration on your frequency, call or write TFT at the address below. In Canada: Glentronix Ltd., Don Mills, Ontario.

TFT **TIME AND FREQUENCY TECHNOLOGY, INC.**
3000 OLCOTT STREET, SANTA CLARA, CA 95051 (408) 246-6365

For More Details Circle (11) on Reply Card

SBE

(Continued from page 12)

Chapter Reports

Chapter 1: Binghamton, N.Y. Chairman: Bill Sitzman, Jr. Tyrone, N.Y. 14887

On December 10th, optional dinner at the Ramada Inn was followed by a meeting at WBNG-TV, Binghamton. Bob Raboin, Supervisor, End User Sales, Amperex Corp., demonstrated the Plumbicon camera tube plus other innovations of the Amperex and North American Philips Co., in the video field. Chairman Sitzman thanked Doug Colborn for having presided over the previous meeting while the chairman was recuperating from loss of voice.

Usually the chapter meets on the 2nd Tuesday at the Owego, N.Y. Treadway Inn. For further information on future meetings phone (607) 273-2970.

Chapter 15: New York, N.Y. Chairman: John M. Lyons Woodside, N.Y. 11377

The December 12th meeting was held at the Cowboy Restaurant, 60 E. 49th St. Morley Kahn and Mike Faulkner of Dolby Laboratories, New York, discussed the reduction of net FM pre-emphasis when Dolby type encoding is simultaneously employed. The technique was demonstrated and applications were reviewed.

For information on future meetings in New York call Chairman Lyons at (212) 335-1600.

Chapter 16: Seattle, Wash. Chairman: Harry Lewis Seattle, Wash. 98125


The December 11th meeting, held in the Downstairs Banquet Room, featured Russ Williams, Ampex Regional Sales Engineer, who demonstrated and described the AMPEX AVR-2 modular portable quad videotape recorder.

Chapter 17: Minneapolis-St. Paul, Minn. Reorganization Under Direction of: Joel Humke, St. Paul, Minn. Reynold Lark, Egan, Minn.

Editor's Note: Thanks to Engineers Humke and Lark, Chapter 17 is on the way back to becoming one of the largest and most active. Arrange-

(Continued on page 16)

Can a chief engineer afford to think only like an engineer?

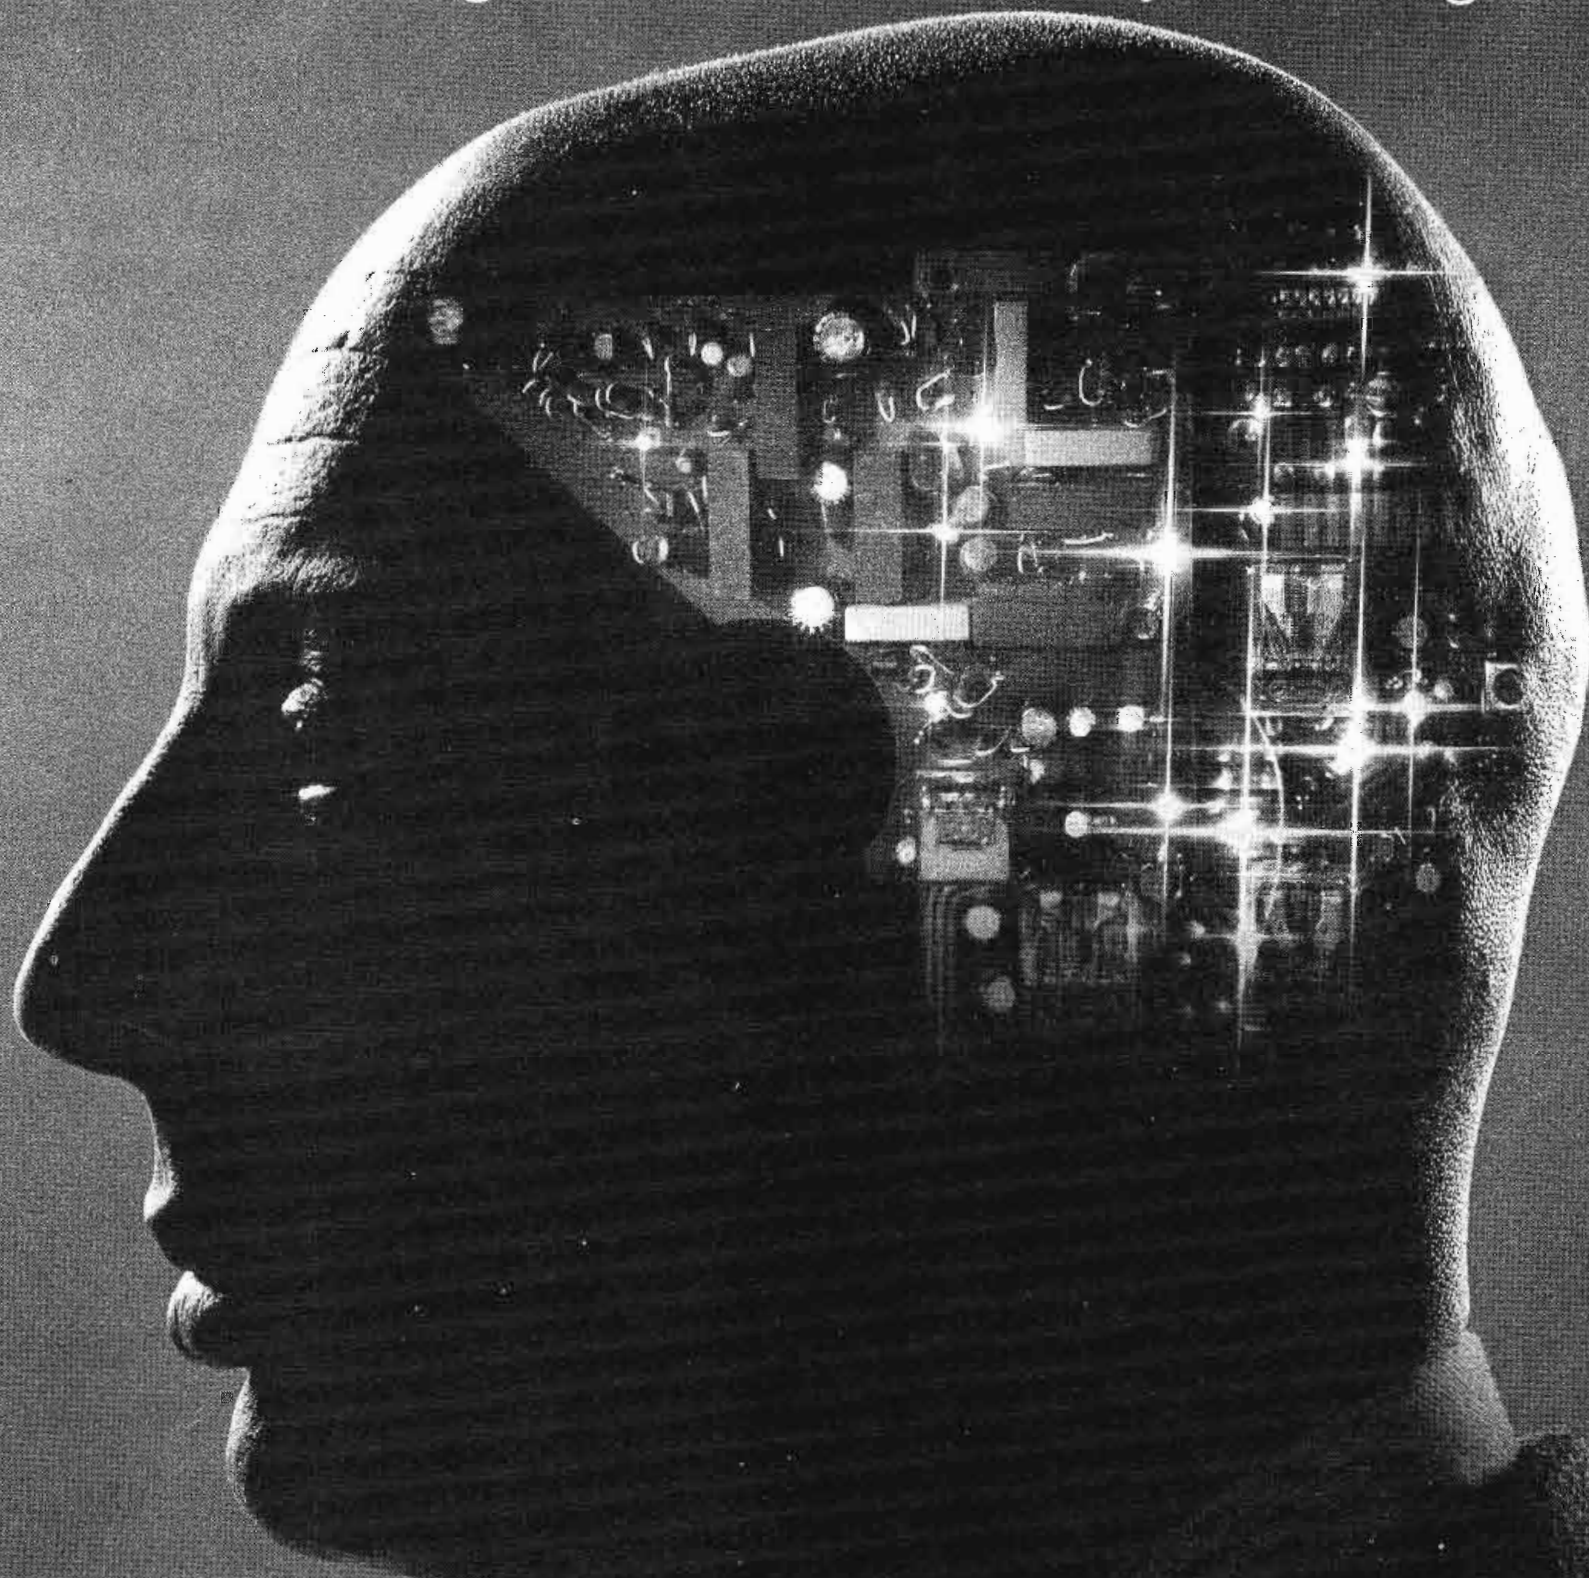

Put a good picture on a TV set.

That's always been the first thing a chief engineer has to think about.

But it doesn't seem to be the only thing anymore.

Today, more and more chief engineers are thinking more and more like station managers.

They have to. They've got staff meetings to go to, they've got equipment to buy, they've got cameramen to keep happy, they've got program directors to keep happy.

Now they've got this whole new thing of electronic journalism to think about. How can their station adapt.

Most agree the way to do that is with one of those little portable color videotape systems. The ones they also agree don't quite stack up to film.

Well, we agree too. They don't. Not on a studio monitor anyway.

But what about the guy sitting at home in

front of his TV set? He doesn't know how many scanning lines a studio monitor has or how many his TV set has.

All he knows is that he sees the news or he doesn't.

If there was a fire downtown at 4 o'clock and he hears about it on the radio driving home, he wants to see it at 6 o'clock. Instead of hearing about it. Again.

And if one station can get that kind of news on the air consistently, chances are the guy at home will be watching that one station. Consistently.

And chances are that station will be using the Akai VTS-150, the portable color videotape system that's being used by more stations in more states than any other system.

If you'd like to find out why, just write us and we'll send you a brochure.

If you'd like to see why, just write us and we'll come and show you.

It's something to think about.

AKAI™

2139 East Del Amo Blvd., Compton, Calif. 90220

For More Details Circle (12) on Reply Card

Canon IOx UNIVERSAL ZOOM

One-Inch Plumbicon® Color Camera Zoom



15 mm to 150mm; f/2.0

- Wide Angle
- Close Focusing 3.9'
- Bayonette Mount
- Adjustable Back Focus
- "Macro Focus" Operation
- Small Size
- Lightweight
- Light Transmission Over 80%
- For All One-Inch Color Cameras

Canon

BROADCAST OPTICS

CANON U.S.A., INC., 10 NEVADA DRIVE, LAKE SUCCESS, N.Y. 11040

© N.V. Philips of Holland

(516) 488-6700

For More Details Circle (13) on Reply Card

The best by far...
because Revox delivers what
all the rest only promise.



For complete details write:
Revox Corp., 155 Michael Drive, Syosset, N.Y. 11791

For More Details Circle (14) on Reply Card

SBE

(Continued from page 14)

ments are being made for a meeting place and technical speakers. Contact either one of the above to learn when the next meeting will be held, and where.

Chapter 20: Pittsburgh, Pa. Chairman: Henry R. Kaiser Pittsburgh, Pa. 15212

The December 19th meeting, held at Buddies Upstairs, was a general discussion meeting which included seating of newly elected officers: Chairman Jim Hurley, Vice Chairman Jack Cvetic, and Secretary-Treasurer Frank Davis.

The November 5th MiniVention was reviewed and it was generally felt that this event was most successful. A repeat for next year was planned for discussion in the early future. The encore was being urged by a number of the exhibitors.

Chapter 21: Spokane, Wash. Chairman: T. O. Jorgenson Spokane, Wash.

Featured speaker, Frank Coile, Chief Engineer of KWSU, discussed Translators in Eastern Washington for Educational Television on November 18th at the usual luncheon meeting at the Castle Restaurant. Mr. Coile suggested that the group hold at least one meeting in Pullman, Washington in 1975.

Chapter 22: Central N.Y. Chairman: Mort Miller Syracuse, N.Y. 13214

The December 19th meeting, held at the Northway Inn, Syracuse, was chaired by Hugh Cleland, program director. The program started with a 20-minute videocassette, courtesy of WCNY, on using and taking measurements with the Tektronix 520 Vector-scope. Following that, the meeting was open to a general engineering exchange or open discussion on problems, solutions, new developments, and FCC regulations.

Chapter 25: Indianapolis, Ind. Chairman: Don Morgan Indianapolis, Ind. 46217

Chairman Morgan presided over the November 19th meeting at the I. U. Dental School. The Tek Corp., demonstrated Broadcast Signal measurements. Tektronix Engineers Paul Raymond, Juan Moore, and Roger

(Continued on page 55)


BROADCAST ENGINEERING

FEBRUARY, 1975

CABLE engineering

In this issue...


Cable TV takes on Jupiter FlybyCE-2

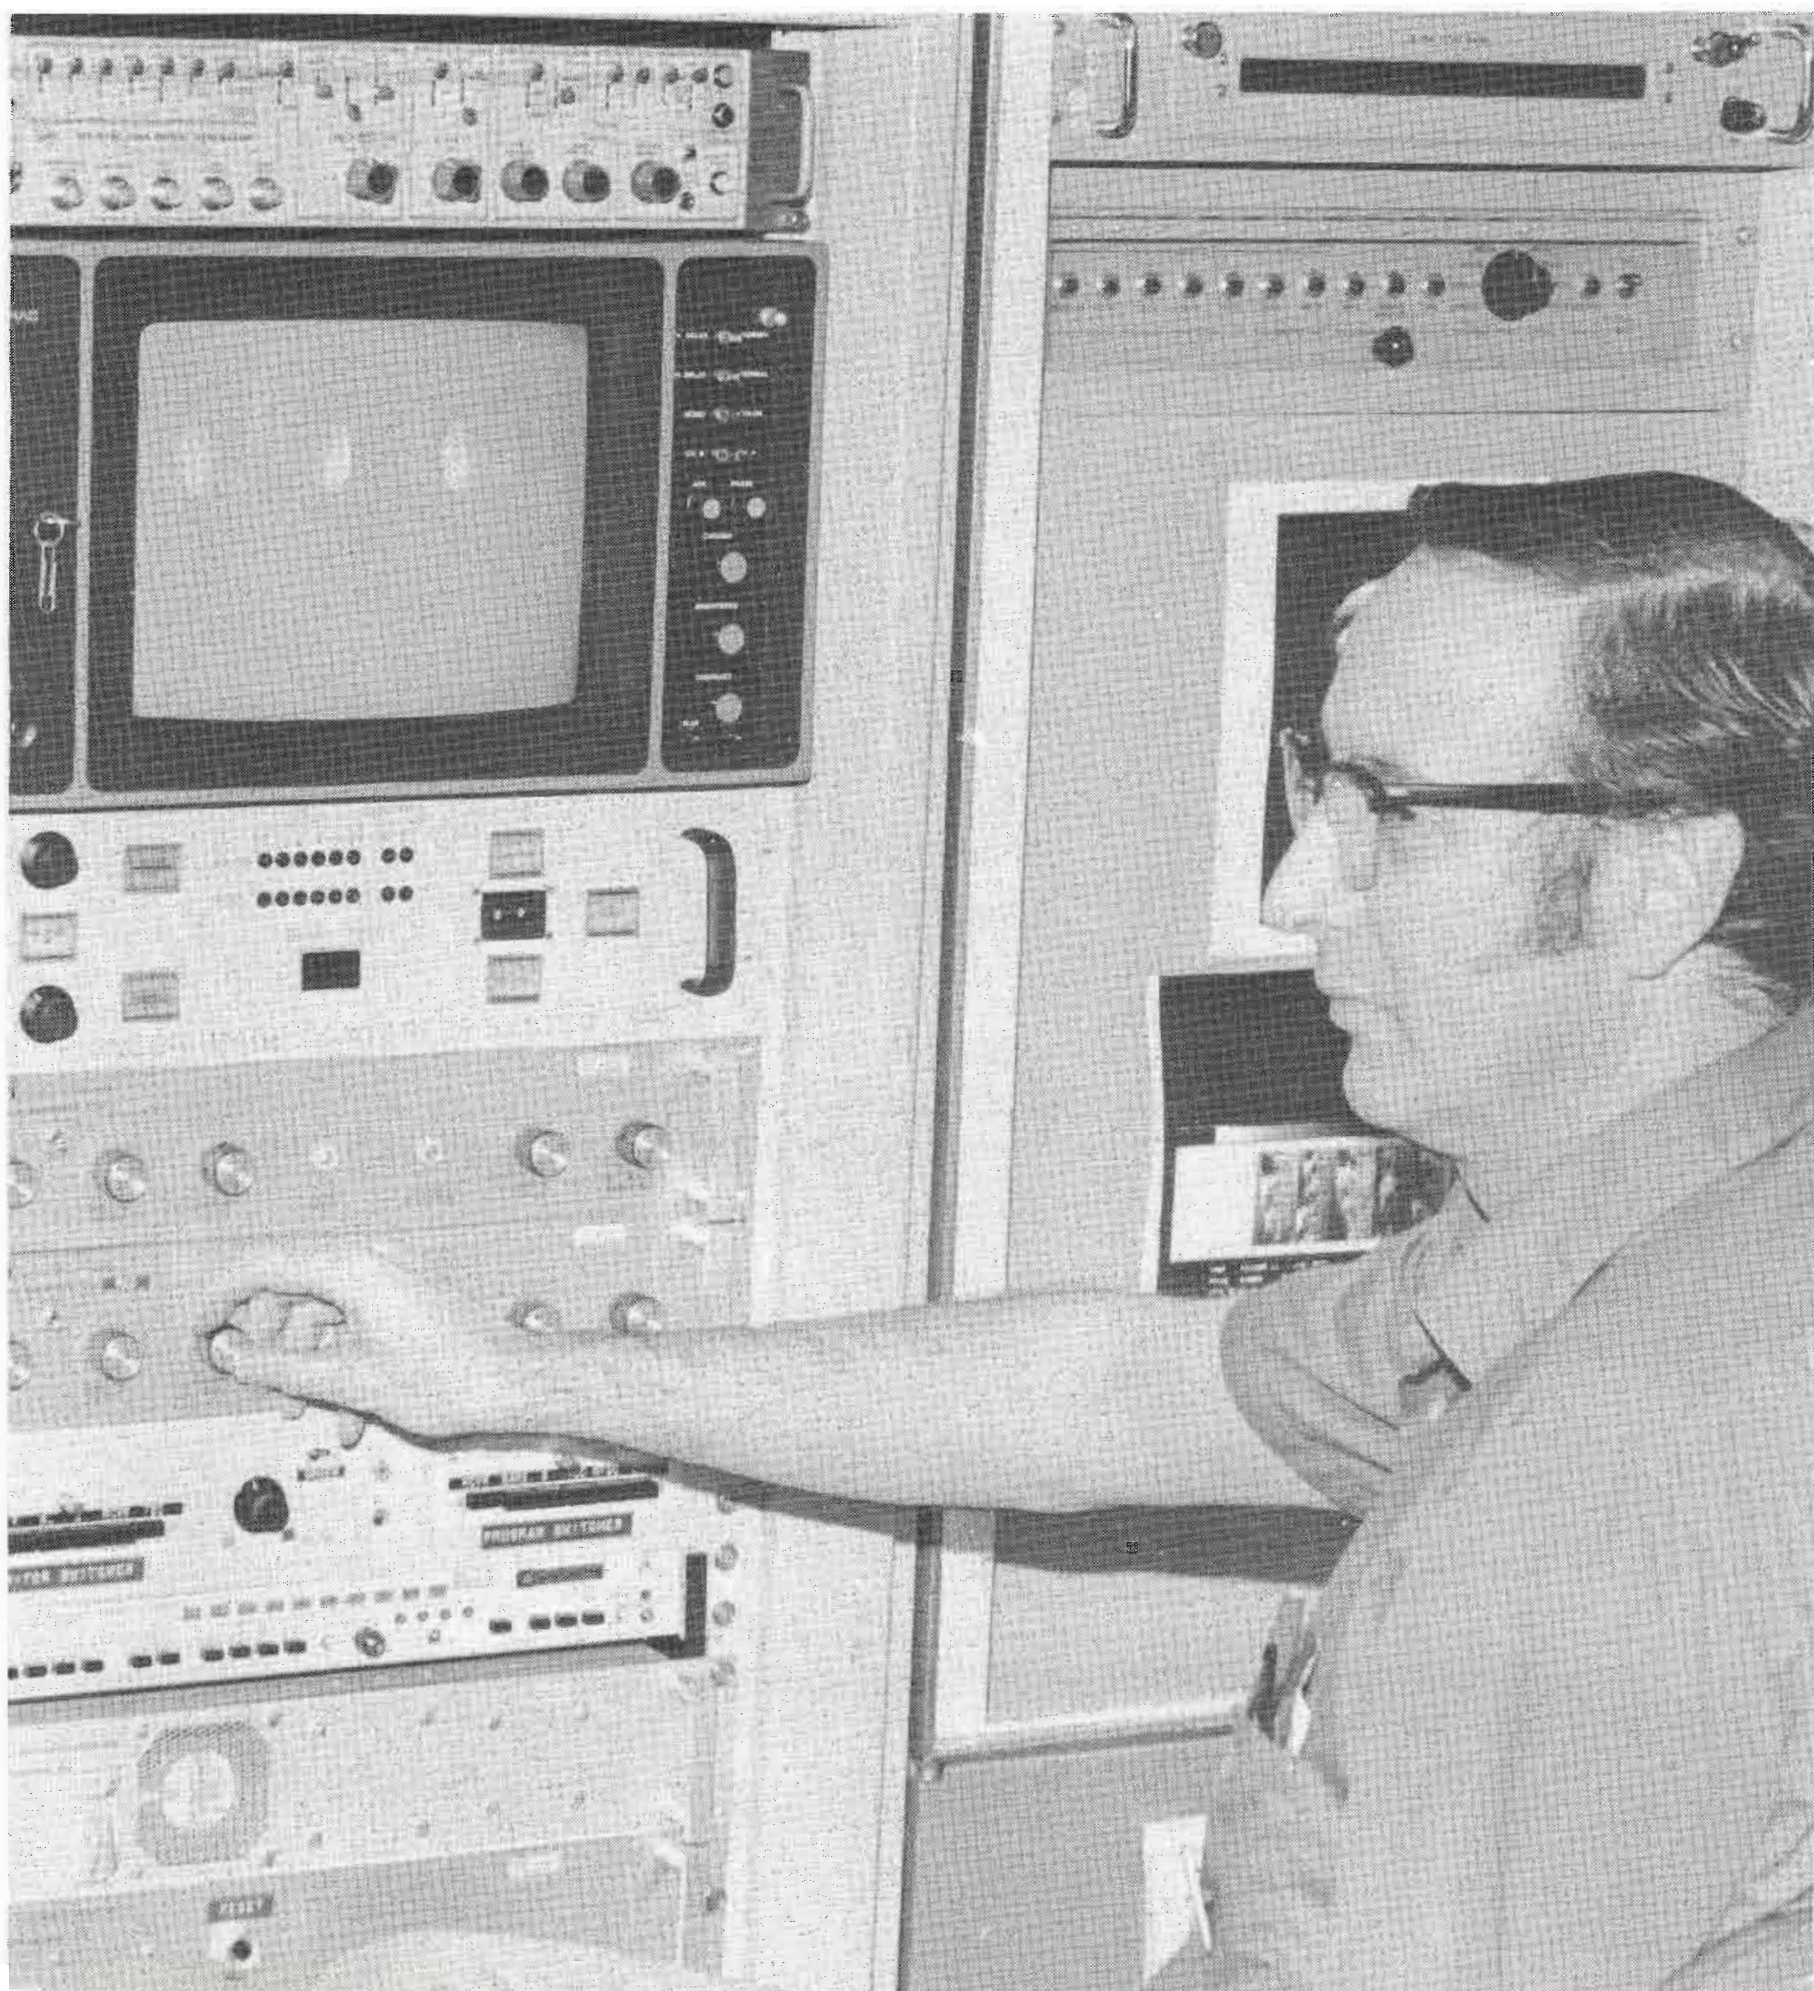

Cable TV takes on Jupiter

By Joe Roizen

(Photos by Donna Roizen)

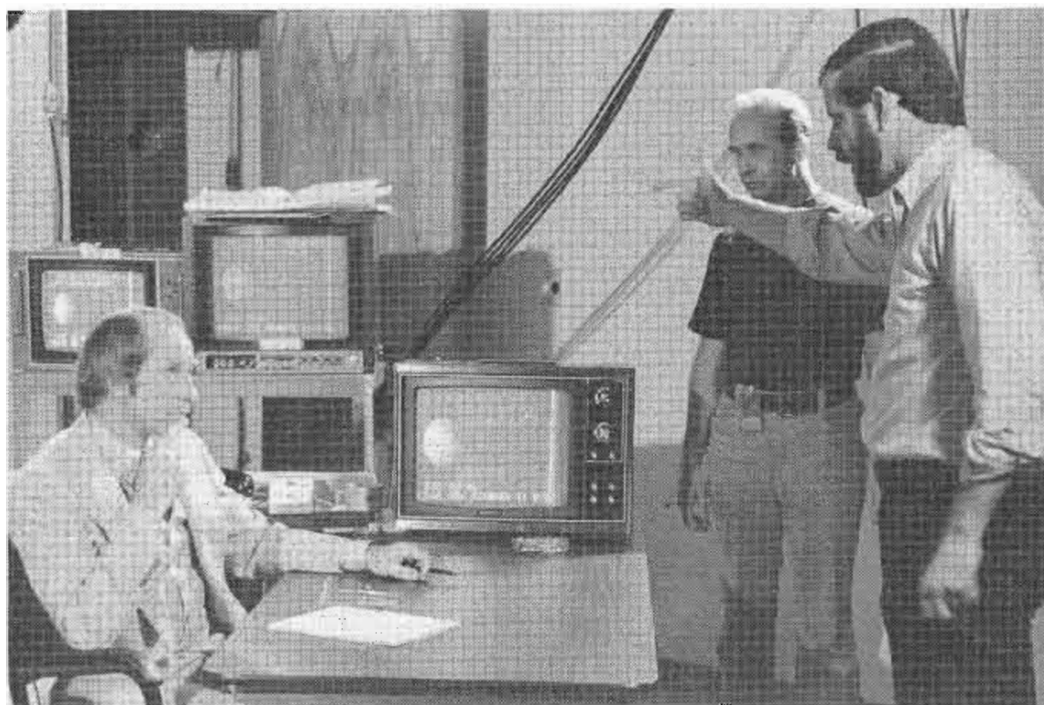

Apollo astronaut Al Worden takes directions from Larry Sturges. Program coordinator George van Valkenberg looks on.

The largest and most mysterious planet in our solar system which has fascinated terrestrial astronomers for several hundred years is Jupiter. Ground observations have established the size, rotational period, and other topographic features. But in an effort to ever refine our knowledge of our own solar system, NASA launched two space vehicles in the past 32 months which were targeted to go around Jupiter and send back signals relating to that planet's atmosphere, magnetosphere, radiation belts, and other scientific details.

While the measurements of Jupiter's specific characteristics are of interest to specialists in the scientific fields involved, the aspect of the Pioneer 10 and 11's fly-by that most intrigued and amazed television viewers all over the world were the actual images of the planet returned from the satellite by a television camera that must easily be the most sophisticated (and expensive) color TV camera to date. The statistics regarding the problem of sending back any signals at all are impressive. Pioneer 11's transmitter, generating an 8-watt output, sent its electromagnetic radiation through 450 million miles to space, a distance so great that even at the speed of light (186,284 miles per second) it takes 42 minutes for the signal to arrive at earth.

Holding Down The Noise

Since the earth is rotating, three separate ground stations located in Goldstone, California, Madrid, Spain, and Canberra, Australia are used to constantly track the space vehicle with parabolic disk antennas measuring 210 feet in diameter. By the time the 8-Watt signal reaches earth, it is at an infinitesimally miniscule level, in order of a quadrillionth of a watt, or in electrical terms minus 153 dB.

the strength of "Gibraltar," yet uniquely mobile and flexible.

The Quick-Set Gibraltar Balanced Pedestal offers everything you want for strength, quiet mobility and unlimited versatility.

- 125-pound camera capacity
- Floating 4-inch column
- Height range from 36 to 56 inches
- Steering wheel with brake for steering or raising and lowering
- Glides through 32-inch doorways
- 6-inch casters have cable guards
- Rubber timing belt drive to casters for silent operation
- Crab and tricycle steering



Gibraltar Cradle Head has "Quick-On" plate and is available with one or two handle operation.



send for free catalog

3650 Woodhead Drive Northbrook, Illinois 60062
312/498-0700

For More Details Circle (56) on Reply Card

To amplify this signal without inserting additional system noise, the amplifiers at the ground stations use masers operating at 7° K, a temperature achieved through the use of liquid nitrogen and needed to slow down atomic activity within the solid-state devices used for separating this minute signal from background interference. If distance is not enough, there is a further problem that when the spacecraft approaches the planet and achieves periapsis it must go through severe radiation which may

*Flyby
Continues
On Page
CE-4*

Management Highlights

Cable, community college television, and local educational institutions scored a significant plus in providing over a million viewers in the San Francisco Bay Area with television access to a momentous event that unfolded itself over a five day period and which received only cursory coverage from the national networks. If there was ever an example of the advantages that are available to the viewer through intelligent use of a cable system, this was probably one of the prime ones.

NASA's exploration of our own solar system through the Pioneer series of space vehicles, which carry television cameras that send back pictures of our neighboring planets, is one of space technology's greatest achievements that is unfortunately eclipsed by the more dramatic Apollo missions that involved human passengers. From a technical standpoint, the problems of sending back television images and other scientific data from distances approaching six astronomical units are phenomenal.

The average viewer getting his evening dose of national news was given only a few minutes of highly condensed pictorial reporting during the peak activity period near periapsis. Obviously, much more was going on at NASA's Mission Control as Pioneer II began sending back reams of information while it was in the proximity of Jupiter. Scientists, who had designed and were conducting the on-board experiments, all gathered at Moffett Field to explain what was happening to science editors and other experts attending the press briefings.

NASA's desire to publicize this event and to also record and distribute later led to a unique opportunity where literally hours of fascinating program material obtained through interviews with the assembled experts were made available over microwave lengths to the local cable companies, TV equipped community colleges, educational stations, and museums. At least, the population in this area had a picture-window view of an historical and technological space success which the rest of the nation saw only through the dim porthole of restricted prime time.

SYNC GENERATOR FOR... FASTER, almost GOOF-PROOF Genlocking (Helical Color & Phase Lock) even still frame



To a broadcaster, the big news behind Video Aids Model 5000 Sync Generator is it's technology how we managed to build a sync generator with all the EIA RS-170 outputs plus burst flag and color subcarrier at such a low price.

But to the cablecaster who uses a sync generator with genlock (phaselock) by far the best news is how the Model 5000 Option: 01 radically improves genlocking faster than you ever thought possible, and so convenient that you can lock to helical tape recorder outputs that have 1000 or more times the frequency variations of broadcast video. This new mode provides a very wide range genlock that is front panel selected to lock to helical recorder playbacks even with $\pm 1\%$ speed variations, ± 10 microsecond skew and high amplitude transition noise.

IMMEDIATE DELIVERY

*List Prices: Model 5000 \$1,244.00. Model 5000 Opt:01 \$1,619.00 Option 01: provides a third mode of operation (helical)



VIDEO AIDS corporation of colorado
112 West 4th Street, Loveland, Colorado 80537
phone (303) 667-3301

affect the performance of the unit significantly and may even damage it beyond recovery.

Television viewers throughout the United States were given relatively short news briefs about the Pioneer 11 Jupiter fly-by by science reporters such as Roy Neal and Jules Bergman which limited reporting of this significant event to a mere few minutes of national network time. That is deplorable when one considers the amount of time allocated to murder, mayhem, and military activities instead of to a positive accomplishment of this kind. Viewers in the San Francisco Bay Area, however, who were connected to cable television or those willing to visit local community colleges, educational institutions such as the San Francisco Arch Diocese and museums like the Exploratorium, were able to see extended coverage of the whole project through a very unique TV system set up by NASA at their Ames Research Center in Moffett Field.

Press briefings during the critical days of the Jupiter fly-by were

conducted with full color coverage and permitted viewers to listen to the scientists and project leaders who explained the progress of the spacecraft and the state of the data being received. Press representatives could ask questions and received direct responses from such noted scientists as James van Allen, who discovered the radiation belt around earth which is named after him, and Dr. Guido Munch of the California Institute of Technology, who has conducted the infrared radiometer measurements of Jupiter's net heat energy output which may solve one of the greatest mysteries as to whether Jupiter is actually radiating more heat than it receives from the sun.

The combination of the pictures being generated by the imaging photopolarimeter on Pioneer 11, with its ever closer views of Jupiter and those coming from the press center or the studio, were constantly being recorded in U-Matic and one-inch format on a pair of Sony and two IVC 800 series machines. It was possible therefore

to either feed live signals of the events at NASA out to the viewers that were hooked into the system and to repeat these programs at more convenient time (one press conference was after midnight) through the use of VTR playbacks that went through digital time base correctors in order to make them broadcast stable. If the national networks needed locally prerecorded Jupiter images to overlay on their commentary, the VTR machines with the correctors could be used for that purpose.

Public interest in this television solar system spectacular was obviously high since the San Francisco Exploratorium reported that they had 10,000 visitors go through to view the special monitors they had set up for this purpose. The local cable companies figured that they were reaching 200,000 homes as far south as Monterey and potentially a million viewers. Obviously, this is one of the areas where cable TV can provide a unique service to the community by bringing high interest information to local subscribers of an event which regular commercial television cannot or will not assign much time to.

The method by which the images are returned from Pioneer 11 is in itself worthy of description. The imaging photopolarimeter, which was conceived by Dr. Tom Gehrels of the University of Arizona and built by the Santa Barbara Research Center is a most unique TV camera weighing nine and half pounds, using 2.2 Watts of power and employing a one-inch telescope as its lens to scan celestial bodies in our solar system. The IPP consists of a dichroic image splitting system that divides the light coming through its lens into red and blue components. Two super-sensitive photo diodes generate electrical signals proportional to light intensity which are stored in the camera's EC memories in the sequential fashion they are received from the stepping action of the lens system as it scans in increments across a controlled angular position of up to 141 degrees. Since the spacecraft itself spins approximately once every 12 seconds, the combined spin/scan motion produces the two dimensional requirements for creating an image.



WITH THE NASCO VIDEOTYPER

Live or video tape programming. Insert titles in existing video tapes with simple typewriter style operation. Displays up to 16 lines of copy in easy to read characters. Supered titles and special effects. Built in sync generator. Price—just \$1,815.



**television
systems**

947 Janesville Ave.
Fort Atkinson, Wis. 53538

For complete
specifications,
write Dept. TE-52

For More Details Circle (58) on Reply Card

**For
Better
Results
Use
Reader
Service
Card
In
The
Back
Of
This
Issue**

Fewer parts... fewer problems with **audiopak® A-2** broadcast cartridge



*Ribs are molded into the flange—
no pencil leads
to break and jam.*

*No top wire.
Reloading's easier.*

*Tape guide is
an integral part of
the cartridge base
— not glued in —
to insure accurate azimuth control.*

Try one free

In the broadcast cartridge world, the simpler the better. That's why the design of the audiopak A-2 eliminates parts that can give you trouble.

The lessons learned from our years of experience developing the world's leading 8-track cartridge have been applied to our audiopak A-2. The result is a more durable, more reliable broadcast cartridge. And because we manufacture the entire product—from tape to packaging—we can assure you of the highest possible quality control.

We're so sure we have the best product on the market, we want to prove it...at no cost to you. For

your free sample and more information on the audiopak A-2 broadcast cartridge, write on your company letterhead to: Capitol Magnetic Products, Division of Capitol Records, Inc., 1750 North Vine St., Los Angeles, Calif. 90028. Attention: Marketing Manager, Professional Products.




CAPITOL MAGNETIC PRODUCTS
A DIVISION OF CAPITOL RECORDS, INC.
LOS ANGELES, CALIFORNIA 90028



TM OF EMI LIMITED

VIR helps automate transmitter adjustments

By Archie Brusch, KATU, Portland, Ore.

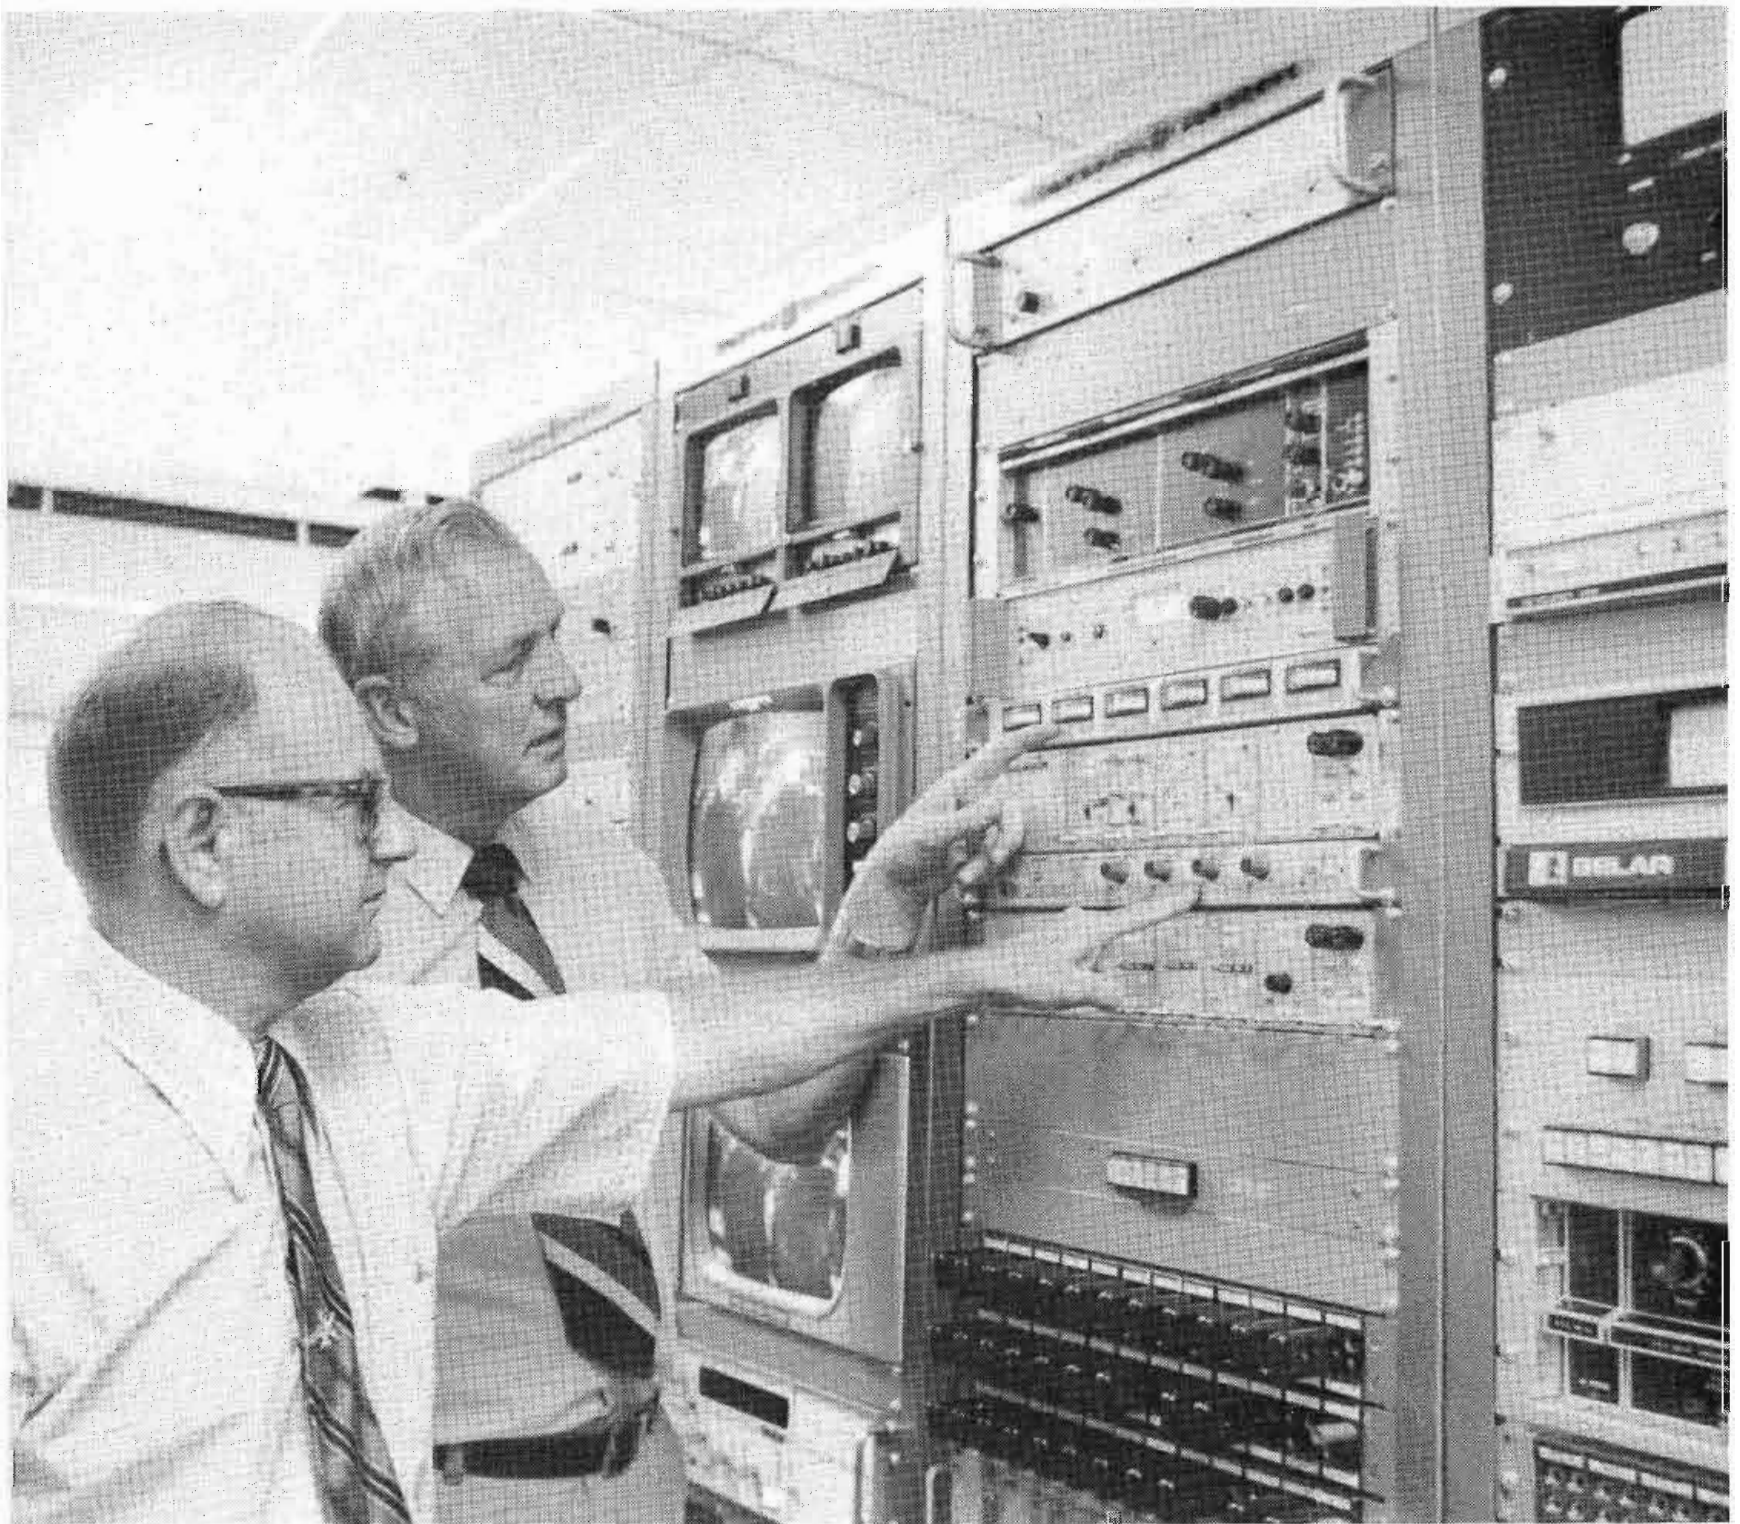

The three units of the 1440 are shown installed in the rack at KATU. CE William Vandermay is pointing to the small meter panel, while Assistant CE Archie Brusch points to the control panel. Top position in the rack goes to the heart of the device.

In March, 1971, the five Portland, Oregon television stations were involved in an actual on-air test of the VIR signal. Stations KATU, KOIN-TV, KGW-TV, KOAP-TV and KPTV were activated during the experimental period with KOIN-TV acting as the originating station. Through the cooperation of Pacific Northwest Bell and associated AT&T companies, the signals were sent through a 1,000 mile loop to simulate a typical transmission circuit, then back to Telco and fed to the various stations involved in the test. The tests were supervised by members of the BTS committee and representatives from interested engineering firms and television consultants from throughout the USA were in attendance, observing and serving as judges of the test results.

Pre-selected color slides with an assortment of APL's, color saturation and hues were transmitted both with and without the VIR signal. When the VIR signal was sent, each transmitter operator adjusted his phase, chroma amplitude, luminance amplitude, black level, etc., for an optimum recovered demodulated VIR signal. The group of skilled observers at the receiving site then made color and quality judgments on the signals from the four stations transmitting (unfortunately, disaster struck and the KOIN-TV towers fell the previous morning so their transmitter could not participate).

Judgments were made with and without VIR adjusted signals. VIR adjusted signals showed a definite improvement in picture quality, and perhaps to be expected, showed that the worse the picture degradation before VIR, the more significant the improvement as seen with VIR.

At the receiving site, all four channels were optimized on a carefully engineered receiving system. All color receivers were made identical as to light output, color balance, etc., and the transmitters involved had been optimized previously.

It was at this test site that the first hint of the concept to use the

VIR as a reference in order to electronically automate transmitter adjustments came to our attention. This gives you a little of the background of the VIR signal, where it originated, and how it was officially field-tested in Portland.

A new and useful device for video control is the Tektronix 1440 Automatic Video Corrector. KATU, Channel 2, an ABC affiliate in Portland, Oregon, has been operating a 1440 since April of 1974, in conjunction with our RCA TT-30FL Parallel Television Transmitter, with such interesting results that we felt we should share our experience with other stations.

Your Transmitted Signal

Basically, the 1440 can be used in two entirely different applications, as shown in Figure 1. First, in open loop operation, it could be used to automatically adjust incoming video from various sources such as a network feed or a remote feed. We do not use the device in this manner. At KATU, we have installed the 1440 in a closed loop circuit at the transmitter.

The VIR signal is added to the program signal at the studio Master Control output. It traverses the STL and transmitter. A Telemet 4501 Demodulator recovers the video signal, including the VIR signal, from the transmitter's output feed line and feeds it back to the 1440.

The 1440 also receives the video signal from the STL and introduces compensatory changes in this signal as it is being fed to the transmitter. These changes or pre-distortions are determined by the distortions suffered by sync, burst and the VIR signal as recovered by the demodulator and fed back to the 1440's other video input.

Correcting Errors

The 1440 can correct; sync amplitude, burst amplitude, and set-up, picture modulation depth, chrominance to luminance gain errors, and burst to chroma phase errors.

The first three errors are subject to FCC tolerances, and the last two directly affect saturation and hue errors in the received picture. The

1440 now uses the VIR as a standard to rebuild the signal **as it appears at the transmitter output coax feed line** in the following manner: the SYNC GAIN is adjusted to exactly 40 points, and stays at 40 points, even with soft tubes which are stretching and compressing the sync level with APL changes. There is no compromise, no question, you get a clean 40 points—no more, no less.

The BURST GAIN is also controlled to exactly 40 points—no more, no less, just as sync gain is held constant. When viewing the recovered signal through the demodulator on the Tektronix 529 waveform monitor, flipping the RESPONSE knob on the 529 to HIGH PASS gives you a presentation of burst and Chrominance Reference Bar that you can lay a straightedge across.

Because the chroma of the burst should be matched exactly to the phase of the Chroma Reference Bar, the 1440 does just exactly that. When viewing the line 19 VIR signal on the 520 Vectroscope, the phase displacement is negligible and the lengths of the vectors match exactly, even under severe APL conditions.


Working on the same philosophy, the 1440 now turns its attention to the CHROMA itself. If the sample from line 19 VIR tells the 1440 that the CHROMA is down 5 points at the transmitter output line, then it adds enough CHROMA GAIN to bring it back up to 40 points.

The VIR signal includes a chrominance reference of 40 points. This is modulated on a 70 point pedestal. This chroma reference will suffer both differential gain and differential phase distortions in the transmitter.

When the amplitude and phase are restored by the 1440, a lot of wrong looking faces look right again.

The 1440 corrects burst amplitude to 40 points, independently of its chroma gain correction, so if there is a lot of differential gain in the system, flesh tones and your burst are both correct. You will know when this is happening but your viewers will not.

Replace Mercury Vapor Tubes Directly with

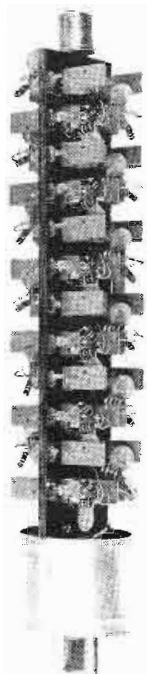

WILKINSON Silicon Rectifier Stacks!

Because...

- ☐ Only non-encapsulated WILKINSON Silicon Rectifiers can be repaired in seconds with low-cost replacement diodes!
- ☐ Exclusive "GO, NO GO" indicator automatically warns when the reverse leakage of any diode is in excess of 50 microamps.
- ☐ Only WILKINSON Silicon Rectifiers are available in a complete tube replacement range of from 866 to 857B.
- ☐ WILKINSON Silicon Rectifiers function in ambient temperatures of from -85 F to +158 F.
- ☐ No more filament heat and consequent filament burnout... lower power cost and reduced hum, too.
- ☐ No warm up is necessary... instantaneous operation!
- ☐ Just plug in WILKINSON Silicon Rectifiers... no re-wiring is necessary.
- ☐ Only WILKINSON Silicon Rectifiers are fully guaranteed and have a safety margin well in excess of tube rating.

For complete details, write today to:

WILKINSON
ELECTRONICS, INC.

1937 MacDADE BLVD. • WOODLYN, PA. 19094
TELEPHONE (215) 874-5236 874-5237

Turning its attention now to the portion of the VIR which rides at 50 points on the recovered waveform (Luminance Reference), our electronic smartbox now either shifts the overall video gain up or down as needed and lays that portion of the VIR signal exactly on 50 points.

While doing all of the above, the device is also eyeballing the set-up on the recovered VIR signal, and lays it exactly where you want it. Want 7.5 points? You get 7.5 points!

As any transmitter engineer will confirm, if you had manually adjusted the above parameters as previously described, you would spend the next ten minutes carefully going over and over the same set of adjustments, each time correcting to smaller and smaller errors, until your eye said, "it's o.k." The 1440 makes the corrections fast and simultaneously. Once presented to the signal to be corrected, it corrects all six items mentioned in the discussion above—in about 300 milliseconds. It does not just start to correct in 300 milliseconds, it completes the job in 300 milliseconds. As a result, the variation in transmitter power output is negligible and needs little or no attention.

Figure 2 shows the classic VIR signal, and the points involved in the previous discussion are all marked for clarification. With this information, you will better understand the method used by the 1440 to correct to the VIR, which is used as the "standard" by the device.

Physical Layout

Physically, the entire system including the meter panel and control panel consists of three units. The latter two are sold as an accessory. The 1440 itself (without the two accessory units) occupies 3½ inches of panel space and all cabling and fittings occupy about 19 inches of depth. This unit is mounted on slide rails and may be pulled out for service, using a simple adaptor. The panel simply contains an on-off switch, a fuse and four LED indicator lights telling which of the four modes the 1440 is operating in.

One of the accessory units contains six sensitive zero center meters in a 1¾ inch panel. Total depth,

including cabling, is about 11 inches. The other accessory unit contains external adjustments, some in the form of pots with knobs, others are recessed controls with screwdriver and adjustment slots. More about both of these units later in greater detail. The three units described are interconnected by two 36-conductor cables with blue ribbon connectors.

An unusual bonus is the ability of the transmitter engineer to use the meter panel to do many things. If your incoming video is normal, you can assume (we find) that the 1440 is functioning perfectly, therefore, you can make ratio adjustments on things like sync, set-up, master gain, chroma, burst gain, etc., by simply adjusting the transmitter control and watching for the 1440 meter on that function to cross the ZERO mark.

The zero center meters show the corrections being applied to video in order to produce the classical VIR signal at transmitter output. Take sync gain for instance. If your transmitter is in reasonable shape, and the incoming signal ratio is correct, and you note that the 1440 sync gain meter is, say at +10, then you can safely run your sync gain on your transmitter (if it has one) to return the meter to zero and you will find that you have optimized your transmitter, which can then be confirmed by flipping the 1440 out of the circuit into its bypass mode.

The above illustration actually has occurred at KATU several times because we are remote controlled from the studio and it is easy for the remote operator to run up sync (or make other adjustments) not realizing that he is doing so. The 1440 corrects for this error, but the maintenance man can then eyeball the meter panel and reset sync for zero reading knowing he is returning the transmitter to normal adjustment.

Another very useful function of the 1440 is to observe the SYNC GAIN meter during varying APL. When your transmitter tubes are near the end of their useful life, sync will bounce with varying APL. As long as the 1440 will control (read on scale), you know that you are safe in keeping the tubes in the socket, thus extending their life. You also have a built-in tube checker for rejecting them. We also

New Sony U-matic news team... from action to broadcast in 30 minutes.



Or even less time. With less equipment. And at less total cost than you're probably paying now for news-gathering and teleproduction.

The major networks, ABC, CBS, and NBC, and many stations nationally are using the new Sony U-matic VO-3800/2850 Videocassette System.

All your work is done on economical, reusable videocassettes. After location taping, either microwave the signals or send the cassette to the studio for quick and accurate editing. Or go right on the air with the use of a time base corrector.

You eliminate film cost and processing time, especially when important events break close to air-time deadlines.

You start with the Sony VO-3800 portable VideoRanger™ recorder and a color camera, such as the Sony hand-held DXC-1600. The VO-3800 can record three 20-minute cassettes on a single battery charge. It has NTSC color and EIA monochrome standard signals, remote control, two separate audio tracks, automatic power shut-off, and on-the-scene playback capability.

Accurate electronic editing is achieved with two Sony VO-2850 mastering recorder/editors and the Sony RM-400 Remote Automatic Editing Controller. The RM-400 provides search, pause, and automatic back-spacing. The VO-2850 has a signal-to-noise ratio in excess of 45 dB for video and audio, also separate editing capability for video and two audio tracks.

Of course, the VO-3800 portable VideoRanger™ or the VO-2850 editor can be used independently of each other. In addition to electronic news gathering, these versatile new videocassette units can add new capability and economy in production of documentaries, on-site retail spots, and general studio use.


For complete information and/or a demonstration write us today.

Sony Corporation of America
Video Products Dept. BE-025-210
9 West 57th Street
New York, New York 10019

Sony. The proven one!

**Sony U-matic Color
Videocassette System**

TV reception simulated.

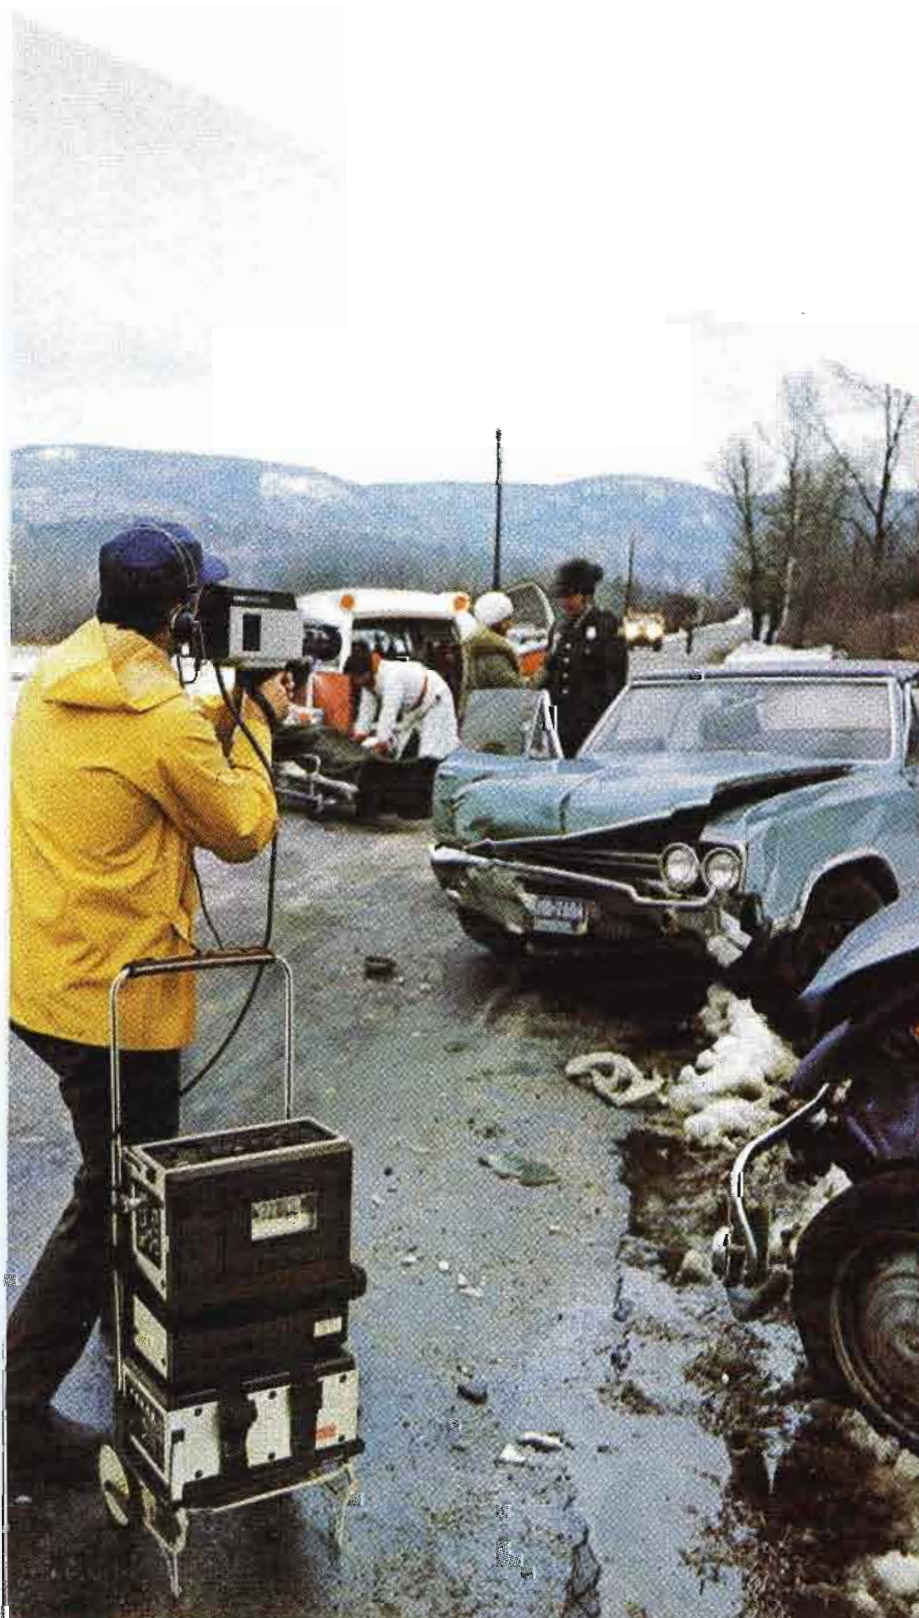

use it to observe the condition of our driver tubes, final amplifiers, etc., as follows.

We can supply the RF sample signal to our demodulator from several strategic points by using a cross point switcher with high grade coaxial relays and commercial 6 dB pads terminating each line coming from the sample points. The most important sample point is the output of the Vestigial Sideband Filter, and the recommended sample point to feed your demodulator which then feeds its own video into the 1440 for a closed loop corrective sample.

Let us assume there is some sync stretch in our transmitter. We know this just by glancing at the SYNC GAIN meter on the meter panel. (Although the signal being broadcast is still perfect.) Let us say it is reading -15. Now, we have a terrific service instrument at our fingertips. Simply select the sample coming from Transmitter A (remember, our Parallel transmitters are twins) and see if the meter goes back to normal. If it does, you have just given Transmitter A a clean bill of health. So, we then select the sample from Transmitter B final stage. This shows (in this case) the -15 reading. Having followed the abnormal reading to Transmitter B, we wish to know if it is the final tube or the driver tube. So, we select the next sample from the driver stage output. If we find the

meter still reading abnormally at -15, the trouble is probably in the stage just preceding our sample, which is the driver. Should the meter read normal on this stage, however, the trouble is obviously in the final amplifier stage.

It appears then, that we have a built-in servicing system, thanks to the combination of the 1440 and our selective RF sample points, thus reducing maintenance time. Your imagination should by now be showing that you can find the source of frequency response trouble. This can be done during air-time, thus providing a dynamic servicing instrument for use on the air, with little or no effects to the viewing public. While I am sure that Tektronix did not intend for the 1440 to turn into a "Transmitter Checker," that is the way it has turned out at KATU!

Modes Of Operation

As mentioned, the 1440 operates in one of several different modes of operation. Let us take a look at them. First, it can be manually bypassed with a lever switch on the control panel. This gives you a look at your system without the correcting efforts of the 1440 and is a useful service function.

In the manual control, the knobs on the front of the control panel become the controls for an excellent in-line, manually operated processing amplifier without the auto-

matic correcting abilities previously described.

The most important mode is the VIRS control position. In this mode, the 1440 is using the VIR signal from line 19 as seen at the transmitter output sampling point through the demodulator, and controlling the signal automatically.

When VIRS Is Not Present

Pre-set mode is also very important. Assume that the VIRS is not present on the programming material. What then? Simple! The electronic brain inside the box says, "I see no VIR, therefore I command the circuitry to proceed to the PRESET mode." Now a different set of screwdriver adjust-type controls have been pre-set to match what the 1440 was doing on VIR control, and when the unit flips to this pre-set condition, no one out there in TV-land is aware of it. True, dynamic corrections are not now taking place, however, the pre-set controls are set for optimum and unless your transmitter develops severe trouble during pre-set mode, you are in good shape. Why drop the VIR? Let us talk about that a bit.

We face several problems at KATU that are perhaps not normal. First, we are operating by remote control from the studio. FCC requires that the operator at this control point (studio, in our case) be able to adjust all ratio and power levels. Second, we are operating two Parallel transmitters (RCA TT-30 FL) into a combiner and the 1440 must control both transmitters.

How about this legal requirement? Let us say the 1440 is functioning on VIR control and the remote operator decides to change sync level. He pushes the correct buttons on the Moseley remote system to run the sync level higher, but the 1440 recognizes an abnormal situation and automatically starts cranking the sync back down! In other words, the 1440 will defeat each and every function that it is capable of controlling, as far as the operator at the remote end trying to adjust things.

To solve this problem, provisions are made to drop the VIR where it is inserted at the studio. The absence of the VIRS then places

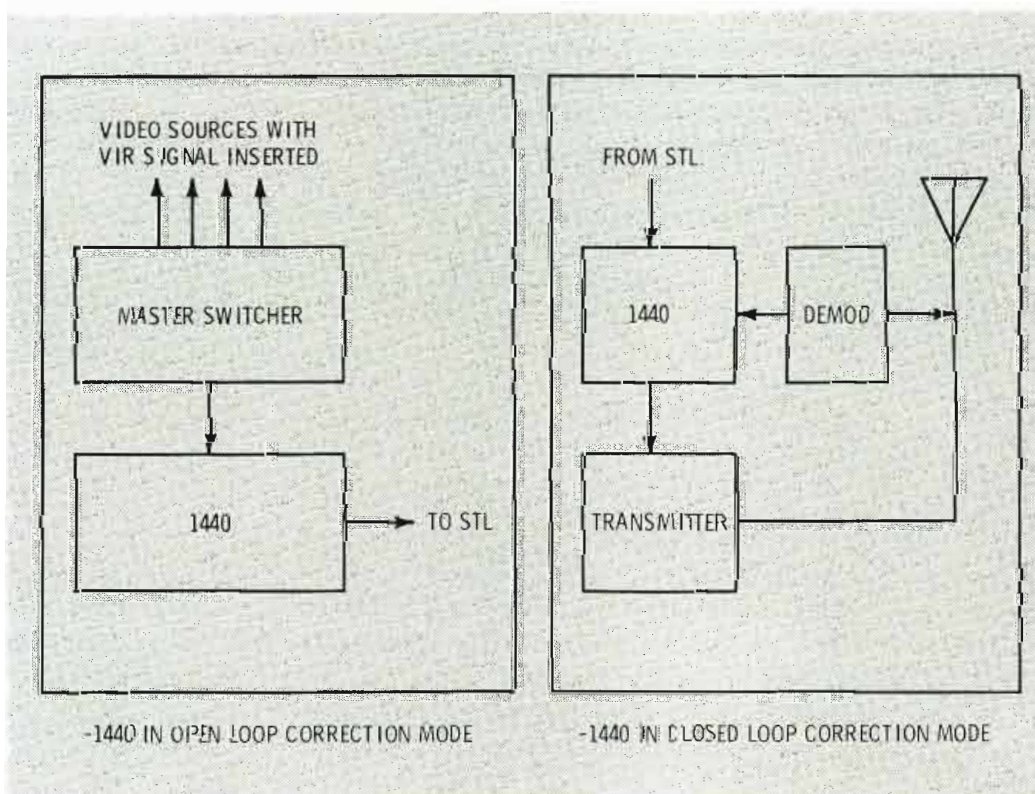


Fig. 1 Open and closed loop operation.

5 MILLION FEET OF FILM — ZERO MAINTENANCE!



RALPH G. WEISINGER, AWARD-WINNING CAMERAMAN-DIRECTOR, AVON PRODUCTIONS

This is the verbatim text of an unsolicited letter received from Mr. Weisinger, reproduced with his permission:

MOVIOLA

"I thought you'd be interested to know that our 6-plate M-77 Moviola has recently had its first replacement part. It was the film slide, and after estimating how many feet of film passed over it, I figured it might be wearing a little bit. The total cost of the replacement was \$6.00.

Since we bought the machine we estimate that we have run 250,000 feet of original material thru the machine without a scratch, add to that 250,000 feet of workprint material, which was then cut down to approximately 35,000 feet of edited footage.



A conservative estimate of all this footage running back and forth, at up to 240 frames a second, for at least 125 round trips, gives us a rough figure of just under 5 million feet of film.

No other piece of equipment in our inventory has performed so flawlessly and without maintenance or down time. It's probably the best investment we ever made and that's why we bought a 4-plate model to keep our 6-plater company."

Ralph G. Weisinger
Avon Productions Inc.


Need we say more?

magnasync/moviola corporation

A Subsidiary of Craig Corporation

5539 RIVERTON AVENUE / NORTH HOLLYWOOD, CALIFORNIA 91601 / (213) 877-2791

For More Details Circle (18) on Reply Card

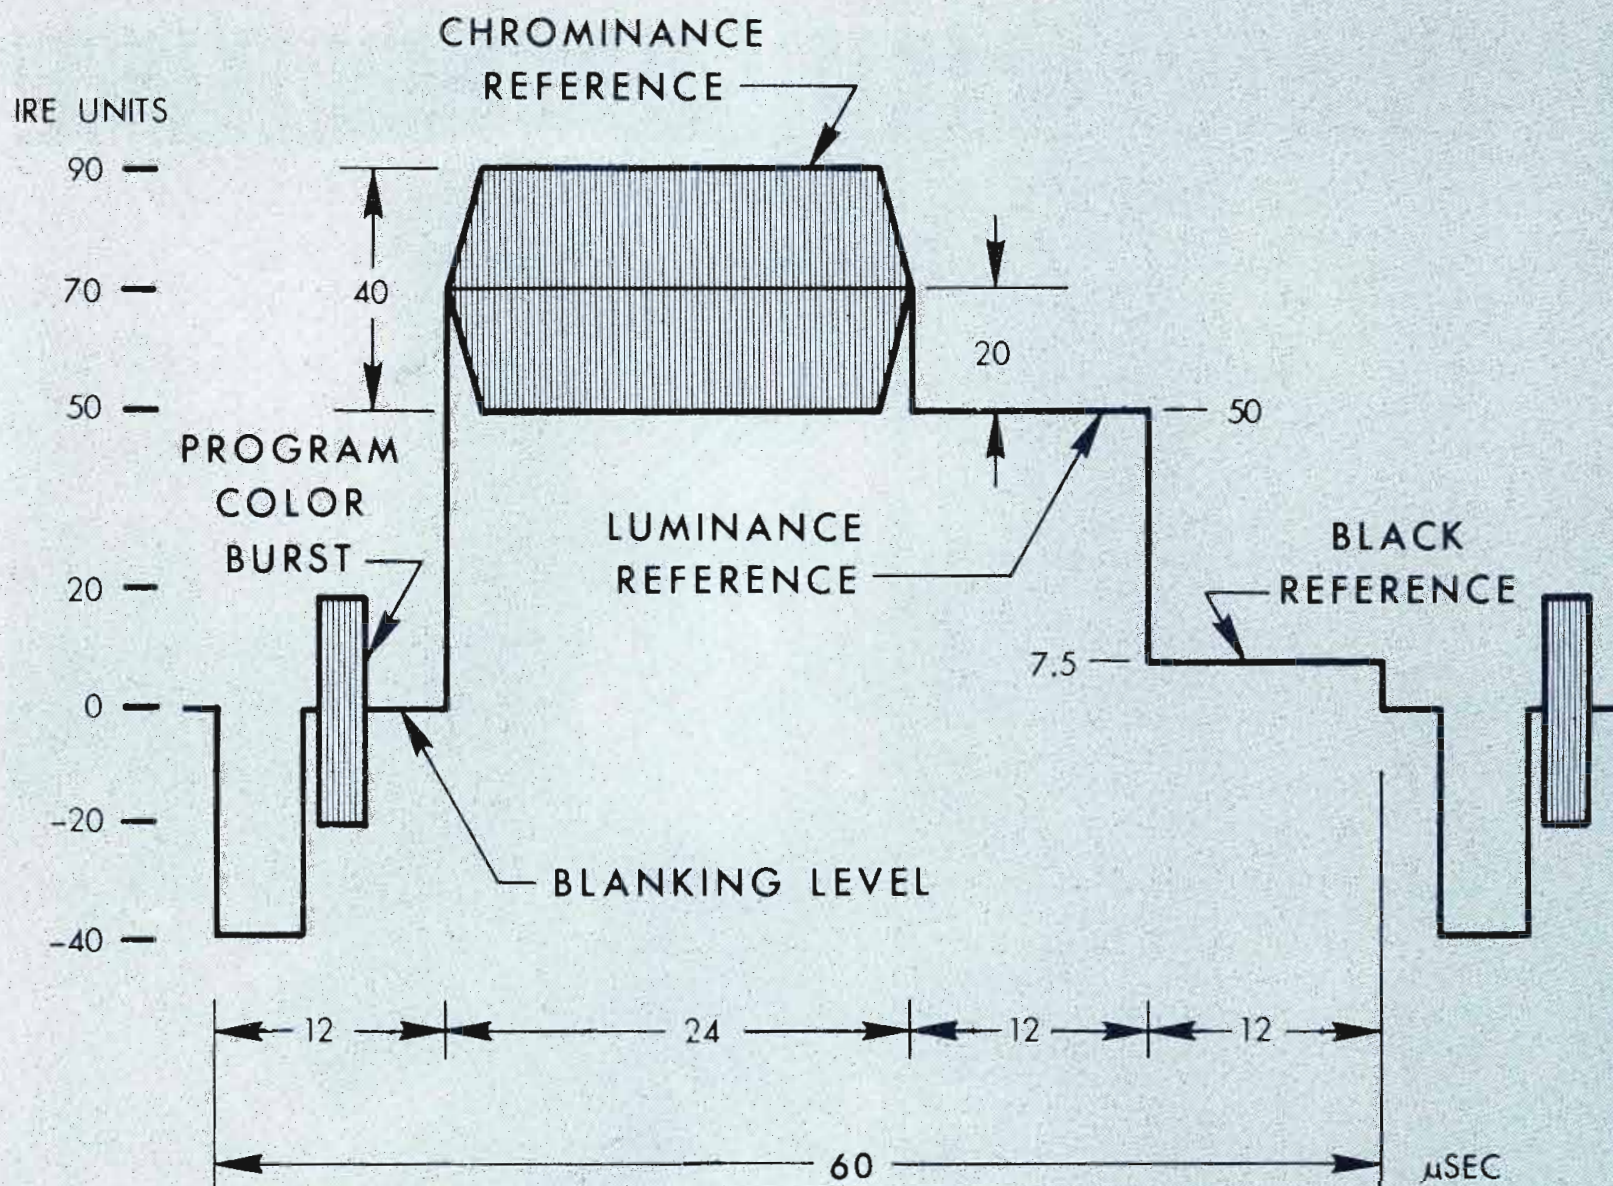

NOTE: The chrominance reference and the program color burst have the same phase.

Fig. 2 The nominal vertical interval reference (VIR) signal.

the 1440 in its pre-set mode. This gives the operator complete and entirely legal control over the transmitter ratios, etc., should he need it. We never have needed it yet.

The VIR signal was originally intended to be a "quality key" that the show producer applied to his program at the point of origination. Then, at destination, if the burst phase is adjusted to be in phase with the VIR chroma reference, and the VIR amplitude points are used as standards, the operator at the transmitter (or studio) can make the program being broadcast look exactly like the originator intended it to look, despite its degradation along the way.

Until program producers become fully aware of the advantages of this system and technical details for

application of the VIRS for transmission are worked out and standardized, it is advisable to DELETE the incoming network or other VITS and insert your own. At KATU, we insert VITS, (including VIRS, on line 19) of the vertical interval, using a Tektronix R149 waveform generator. This is the last operation that occurs to our studio feed and occurs at the point we feed the microwave STL. Thus, we have absolute control over the quality of VITS, including our VIR.

Now, upon occasion, after staying up all night to make sure your transmitter will pass the best of color programming, you will find that the station is transmitting black and white. We have a very popular series called "Movie Classics" and most of these old-timers are available only in black and

white. What happens to our 1440 which depends on VIR during such programming? Well, if you do nothing, the 1440 will flip over to pre-set, which is good, but not dynamic. So, you insert the VIR signal without burst when on black and white and the 1440 then goes right on regulating monochrome parameters and doing the job of maintaining sync and video ratios and gain.

General Installation Information

It goes without saying that a chain is only as strong as its weakest link, and we have at least two important items as links in this chain besides the 1440. First, how about the transmitter? It must be reasonably clean as far as band pass and power making ability.

(Continued on page 56)

The Editor-In-Chief!




Now you can economically edit on helicals and automatically transfer in minutes to quads

The editing system you've been waiting for. Meet the Editor-In-Chief. Our thrifty new Vidicue 5050.

It defies obsolescence. You can expand from two to three machines at will. Or move up in logical steps to a completely automatic on-line, off-line system where editing is done on low cost helicals and transferred in minutes to quads.

Easy to learn, and to operate too. Simple keyboard entry. Visual display of tape position and all edit points. Exclusive jam sync, eliminating forever the need to pre-record SMPTE edit code on tape. A/B rolls, color framing, special effects switching, time base correction. The works!

Yet this remarkable video tape editing system is priced far below competition. In fact, there is none.

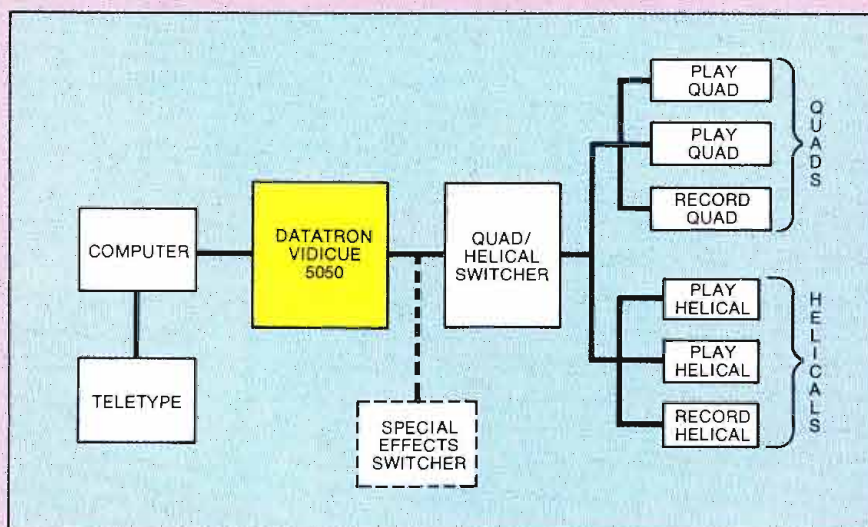

The importance of Jam-Sync.

Our exclusive jam-sync eliminates the need to pre-lay-down the SMPTE edit code on an entire length of fresh tape being used to assemble a show from other tapes. Instead, during pre-roll, the system time code generator is automatically set and sync'd so that time picks up exactly where it left off — to

the frame. This saves quad head wear. Tape wear, too. And is also a great time saver on stop-and-go live production by generating a continuous uninterrupted elapsed time on the tape.

Save your expensive quads for other jobs.

The block diagram tells the story. You can edit on-line or off-line. Do time consuming edits on low cost helicals. Edit event times are stored in the computer

and a punched tape prepared. Using this tape, a precisely edited show can be automatically transferred to quads in minutes.

Your quads have never had it so good. Or your pocketbook either. We'd like to tell you the whole story of our Editor-in-Chief. Why not write or phone today.

datatron, inc. EDITING SYSTEMS DIVISION

1562 Reynolds Ave., Santa Ana, California 92705 (714) 540-9330 • TWX 910-595-1589

Mailing Address: P.O. Box 11427, Santa Ana, California 92711

For More Details Circle (19) on Reply Card See Vidicue in action-NAB Show Booth 602


A challenge for test tapes and records

By Dennis Ciapura

Although electrons can be made to paint an audio analogy with near perfect precision, there comes a time when the program must be stored. Audio recordings on plastic disks and magnetic tapes are the most common storage mediums employed and it is here, at the electro-mechanical conversion, that the audio engineer meets his greatest challenge.

The broadcaster has his opportunity to share that challenge when it comes time to convert the mechanically stored program back to its electrical analogy for broadcast to the radio listener. Even if the broadcaster was to install a perfectly transparent cable link to each listener's home, the fidelity of the program would still depend upon the accuracy of reproduction that the tape or record playback systems at the station are capable of. That fidelity capability is best measured by testing the fidelity of test tape and record reproduction.

In the "bad old days" when recording standards for equalization varied as much as quad standards do today, the job of insuring accurate reproduction of every recording that came down the

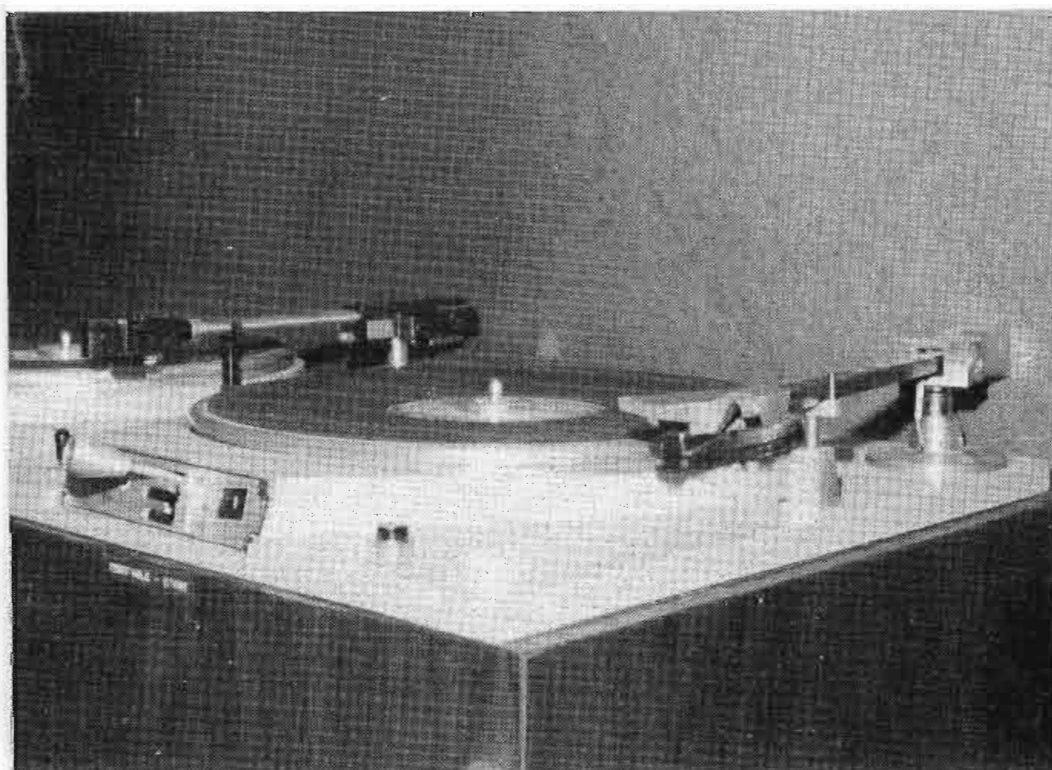

Turntable system used in tests described.



Diane Ciapura inspects the \$30 component that shapes the sound of a multi-million dollar radio station.

pike was often a frustrating one. With today's tape and record equalization pretty much standardized, the testing process for frequency response is quite simple and really takes very little time.

One area that is virtually unknown to broadcast engineers is that of tape deck and phono distortion testing. The reason that these tests aren't commonplace, despite the fact that the opportunity for audio disaster is very great when dealing with electro-mechanical conversions, is that the test materials are largely unavailable. Have you ever seen, much less used, a distortion test tape or record? How ironic it is, that most broadcasters can easily produce data and curves for the frequency response and distortion of every segment of their broadcast chain, except the very tape decks and/or phono reproducers that feed the audio into the system!

In our proof change survey series of articles, **Broadcast Engineering** proposed the use of standard test tapes and records for equipment performance measurements. Since very little experience in this area existed in the broadcast industry, we decided to pick the minds of some top people in the recording, test tape and record industries to see what types of test tapes and records are available now and what, if any, new types could be generated to widen the scope of transducer tests that could be done in the field. We were primarily interested in looking into the factors involved in producing low distortion test tapes and records that would be suitable for use as signal sources for the equipment performance measurements, as well as routine maintenance tools.

For our test tape investigation, we turned to Mr. John G. (Jay) McKnight, president of Magnetic Reference Laboratory in Palo Alto, California, who is currently serving as the chairman of the Measurements and Definitions Sub-committee of the N.A.B. Tape Cartridge Standards Committee, as well as

many other advisor positions in this field. Jay is recognized as one of the world's top tape experts.

We Rolled Our Own

Before we attempted any further investigation, we decided to record our own distortion test tape on a broadcast type recorder to see what results could be expected before we proposed any standards for a production line product. After all, it would mean very little to propose that a standard test tape with less than 1 percent distortion be em-

ployed to test station deck performance if some basic limitation made such a tape impossible to produce. If, however, we could produce a suitable tape on relatively unsophisticated equipment, then it would seem logical to assume that a somewhat better product could be produced by a test tape manufacturer.

Our test machine was a Scully 280-2, which is a 2 track stereo record/play deck. We chose a speed of 7½ i.p.s. and Ampex 406 recording tape, so that a common mode of broadcast operation and an

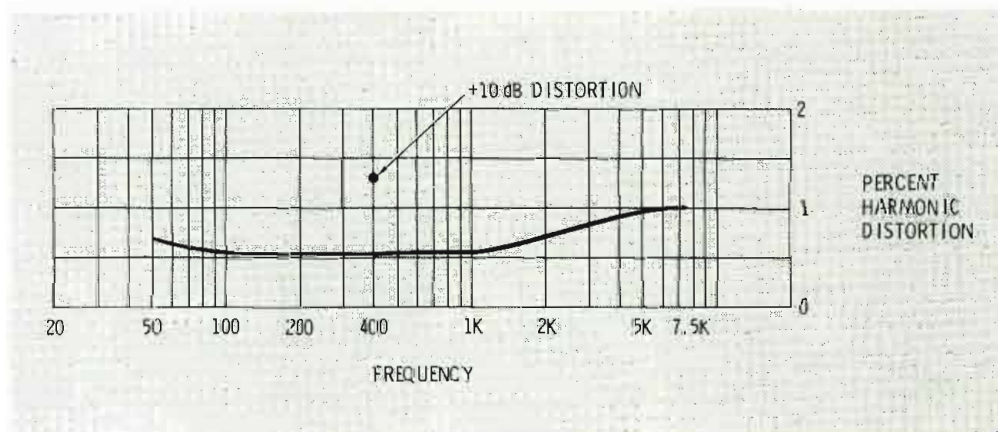


Fig. 1a Graph depicting distortion vs. recorded audio frequency for the sample tape.

SAMPLE DISTORTION TEST TAPE RESULTS

LEVEL	AUDIO FREQUENCY	CHANNEL 1	CHANNEL 2	AVERAGE
@ 0 dB	50	0.84	0.50	0.67
	100	0.65	0.45	0.55
	400	0.65	0.45	0.55
	1000	0.65	0.45	0.55
	5000	0.95	0.90	0.93
	7500	1.00	1.00	1.00
@ +10 dB	400	1.50	1.10	1.30
	400 Hz CLIPPING LEVEL	+16 dB	+16 dB	+16 dB
TAPE: AMPEX 406 (1 1/4") SPEED: 7 1/2 IPS RECORDER/REPRODUCER: SCULLY 380-2 (2 TRACK STEREO) REFERENCE LEVEL: 200 nWb/m				

Fig. 1b Detailed results of the tape distortion test.

easily attainable tape would be employed. No special or modified circuitry was used and the tape sample was selected at random.

Figure 1 illustrates the distortion vs. frequency response characteristics that we were able to attain. We ran the same series of measurements on each of the channels and averaged the results to obtain the data for the curve. The bias was adjusted for minimum distortion with 0 level referenced to 200 nWb/m fluxivity. In record pre-amplifier input level was adjusted to keep each tone at 0 level for a uniform playback output level. The same tests were performed on several other machines of the same type but with different test equipment and different engineers, so, we know that the results are not a fluke peculiar to one set of test conditions, as all of the results were very similar.

As you can see from the graph, mid-band values of around $\frac{1}{2}$ percent are attainable and a 1 percent limit at the frequency extremes is reasonable. Even at a +10 dB level, the average distortion at 400 Hz is still only 1.3 percent and a +16 dB input was required to cause visible flattening of the waveform with the 406 tape. Figure 1b gives the individual distortion levels for each frequency. A 16 kHz toroid type low pass filter was used to eliminate supersonic bias components and weighed the measurements so that only audible components would be measured. Oscilloscope checks of the null type distortion meter output showed that the distortion consisted mainly of third harmonic. Measurements beyond the 7.5 kHz fundamental that we used would have been pointless because even the second harmonic of higher frequencies would fall outside of the bandpass of the ear, radio broadcast and our tests.

Figure 2 shows the bandpass characteristic employed and Figure 3 shows the test arrangement that we used, for those who wish to duplicate the procedure. No attempt was made to reduce the high

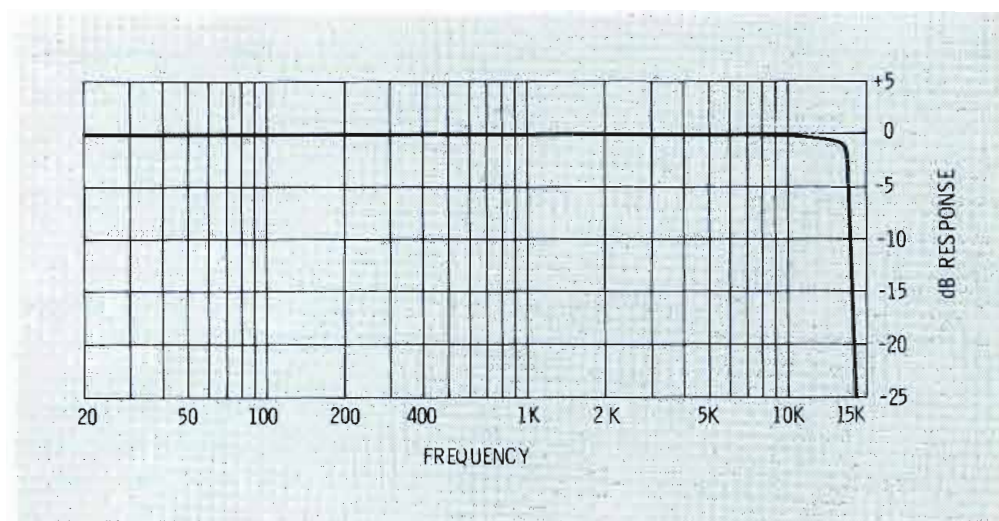


Fig. 2 Bandpass characteristics used for the distortion measurements.

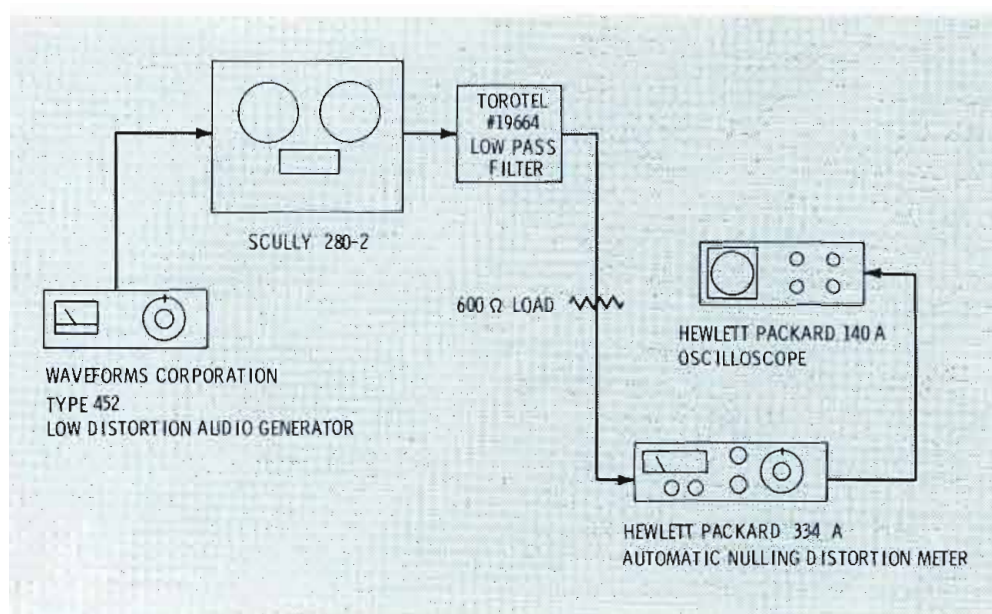


Fig. 3 Test equipment and recorder/reproducer used to produce the sample tape.

frequency distortion by employing pre-distortion techniques. Most of the distortion takes place during the recording process, so, the use of pre-distortion would simply compensate for that distortion, thus insuring that the play-back measurements included play-back system distortion only.

Motional feedback methods have been used successfully for many years to reduce the inherent non-linearity of disk cutters and even speakers. While motional feedback would not be possible with tape systems, the fact that a test tape is a series of single tones makes the pre-distortion process quite simple,

since each tone could have its own individual compensation tailored to the record transfer characteristic at that frequency.

The next step in our test tape investigation was to consult with our tape expert, Jay McKnight, to see what his thoughts on the subject were. Although we knew that a distortion test tape with a "less than 1 percent" spec could be produced singly, we wondered if such a tape could be added to the series of standard test tapes produced by an existing commercial firm, and manufactured in normal quantities. After a discussion of the inherent system limitations that

A multi-track cartridge would be more difficult to produce because of the lesser tape width that can be recorded on for program tracks due to the portion occupied by the cue track, but it appears that a distortion test cart could also be produced. As a matter of fact, an appropriate type of tape could have been recorded on the Scully 280 that we used for our tests, and then loaded into a cart for use in playback distortion tests. Unplugging the cue pick-up head leads would prevent "stop" activation. Of course, a commercially made test cart would be cut in the standard track configurations and once again, pre-distortion techniques used to reduce the recording distortion.

BL-40 MODULIMITER

The Automatic AM Broadcast Limiter With Tweak-ability

February, 1975

For More Details Circle (20) on Reply Card

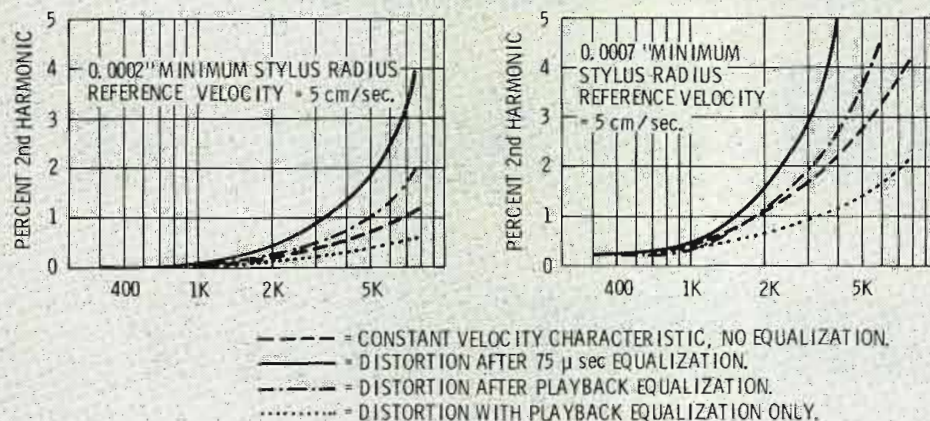


Fig. 4 These graphs show the calculated values of second harmonic that can be expected due to tracing error during playback, assuming negligible recording distortion and perfect vertical angle matching.

$$\begin{aligned} \text{\% Second Harmonic Tracing Dist.} &= \frac{2\pi f v r}{u^2} \times 50\% & \text{\% 2nd Harmonic Due To Vert. Mis-match} \\ (u' = .133 \times \text{Dia.} \times \text{r.p.m.}) & \text{\% 2nd Harm.} = \frac{v}{u} \times \tan \angle \phi \times 100\% \end{aligned}$$

Where:
 f = frequency
 v = velocity
 r = tip radius
 u = linear speed

Fig. 4a Formulas used to generate the curves shown in Figure 4.

handling machinery! We have made tape deck distortion measurements with several types of distortion meters ranging from inexpensive kit form products offered by Heath and Eico, to the automatic null Hewlett Packard equipment and have not experienced any problems unless the deck under test had some mechanical deficiency.

Looking at the test tape situation as a whole, since excellent frequency response test tapes like the MRL 21 series already exist and low distortion high level tapes are a reality, there is no reason why truly complete tape deck performance tests can not be done in the field, thus assuring the broadcaster that his tape playback quality is commensurate with the fidelity capability of the rest of the broadcast

chain. A good, comprehensive test procedure for FM broadcast would consist of running a reproducer alignment tape through each tape deck to adjust the equalization for the flattest response, then run a high level low distortion test tape, including a 400 or 1000 Hz tone at 10 dB above reference level, as well as the 50 to 7500 Hz at 0 dB series. This procedure would show up any response, distortion or headroom problems in the tape equipment and yet still represents a very small investment of engineering time and money.

Now, How About A Distortion Test Record?

Our expert opinion for the test record project was Dan Gravereaux, of C.B.S. Labs, Recording Research

Division. Dan is a top authority in the field of disk recording and playback and has had his work published nationally.

Like many other technical situations, there are two sides to the record distortion story; the distortion recorded onto the record during the manufacturing processes and the playback distortion, which depends upon many factors. While modern mastering techniques can produce a test record with a very small amount of recorded distortion through the use of motional feedback techniques, it is difficult to retrieve the same degree of perfection during playback. So, our investigation was aimed at finding out what type of test record would be best suited to AM and FM broadcast testing and what kind of results engineers in the field could expect to get with the kind of playback equipment currently in use. Assuming that tone arm tracking error has been kept to a minimum, high frequency tracking, or tracing error, is one of the prime playback distortion problems. Although the waveform on the record can be cut with as little as about 1/4 percent distortion, it is cut with a chisel shaped cutting stylus which results in harmonic generation when we attempt to trace the waveform with a spherically shaped playback stylus. The larger the stylus radius, the more distorted the output waveform will be.

Unfortunately, the requirements for good low frequency tracking and good high frequency tracing are contradictory. To maintain good contact with the groove walls while tracking low frequency components, the stylus should be relatively large, but to trace the intricate treble modulation, the stylus should be as small as possible. The most common method of dealing with the problem is the elliptically shaped stylus. The dual radius tip does a good job of maintaining groove wall contact while tracing the higher frequencies with improved accuracy, because the smaller radius can better follow the

path cut by the chisel point. Most of the distortion is second harmonic and can be calculated quite easily.

Figure 4a is the formula for estimating the second harmonic distortion. As you can see, the distortion is proportional to the frequency, the velocity and the minimum stylus radius. It is also inversely proportional to the square of the linear speed. From this relationship we may deduce that the best conditions for low tracing error distortion would be minimum velocity, minimum stylus radius and maximum linear speed. Since our test record is supposed to be a high level distortion testing device, the velocity must be the same as normal program material would produce, so, we are limited in this area. The stylus radius is a function of what the broadcaster has in his phono pickup at the station, usually a 0.7 mil. spherical in older equipment, or one of a variety of elliptical combinations in the high performance phono systems.

The linear speed is proportional to the disk r.p.m. and the circumference, therefore, the highest linear speed for a $33\frac{1}{3}$ r.p.m. record would exist at the outer band.

To get some idea of what the tracing distortion limitations are, we calculated the second harmonic content for various conditions of equalization for 0.7 mil. and 0.2 mil. styli. The 0.2 mil. radius could be the smaller radius of an elliptical, so, these curves apply to the high performance systems, while the 0.7 mil. curves show the limitations of the common spherical. We assumed that the distortion test series would be cut at the outside of the disk and used $10\frac{1}{4}$ " diameter to calculate the linear speed.

Using a reference velocity of 5 cm/sec., we first plotted the distortion for a constant velocity. Next we applied the increase in velocity resulting from the 75 usec. standard recording equalization used on the high end. This is not the distortion that would appear at the output of the phone pre-amp, however, since it does not take the

Video Tape Timer

**REPLACES
MECHANICAL TIMER
ON
AMPEX
AND
RCA VTR'S**




- Hour-minute-second-frame display
- Bright LED readout
- All solid state
- Direct replacement on VTR
- Remote display option

RECORTEC, INC.

777 PALOMAR AVENUE • SUNNYVALE, CALIFORNIA 94086 • (408) 735-8821

For More Details Circle (21) on Reply Card

the source!

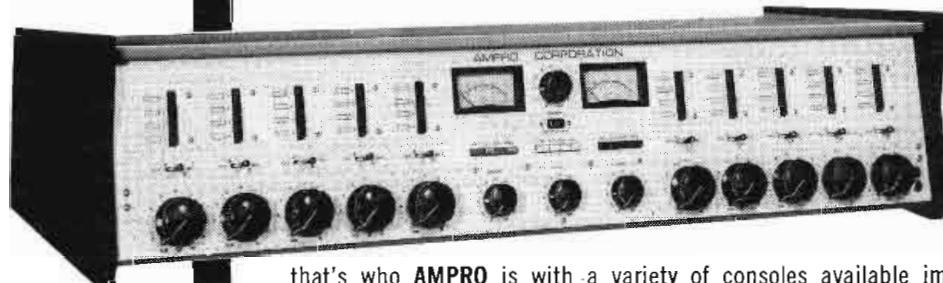

that's who **AMPRO** is with a variety of consoles available immediately from stock . . . 4, 6, 8, 10 and 12 channel audio consoles in mono, dual mono, stereo and dual stereo/simulcast versions with your choice of either slide or rotary fader! Heavy duty components used throughout **PLUS:**

- 4 input transformer coupled preamps and step type faders with cue on all channels.
- +24 dBm protected transformer coupled outputs.
- Protected monitor with 4 muted outputs and separate phone amp.
- Built-in cue, intercom & remote talkback systems.
- Stereo phasing test switch for audible evaluation of source phasing on all stereo consoles.

Add in shielded PC board mixing bus to eliminate maintenance problems, 104 dB Mic to Program output and much, much more and you'll see why **AMPRO** consoles set the industry standard. Priced from \$1,795 to \$4,795.

AMPRO also manufacture a complete line of automatic tape cartridge recorder/reproducers and multi-cartridge units. Financing available to qualified buyers. Call Alex Meyer collect or write today for details.

AMPRO CORPORATION

2220 Maplewood Ave., Willow Grove, Pa. 19090 • (215) 657-3100
Professional Equipment for Broadcasting Professionals



See us at NAB Booth # 910 South Hall
For More Details Circle (22) on Reply Card

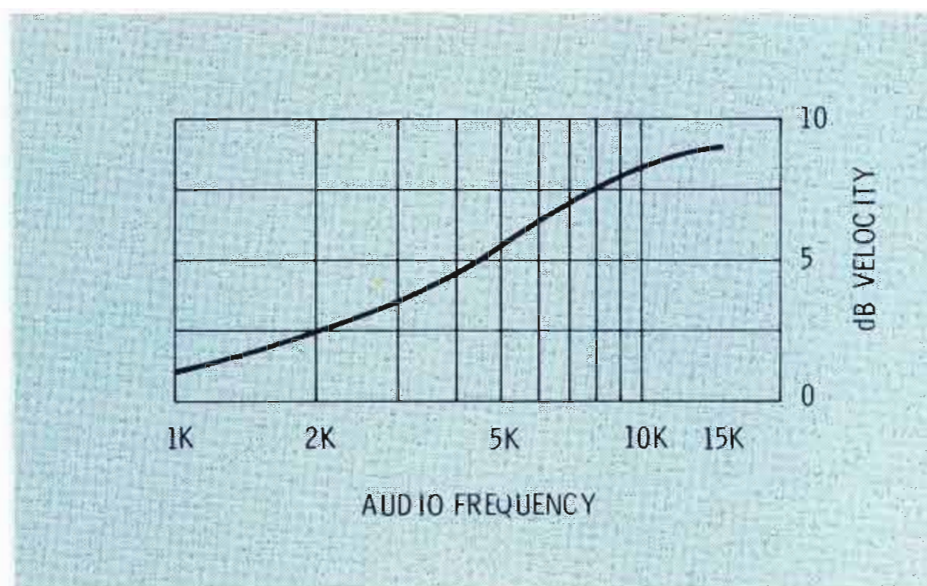


Fig. 5 A recording equalization curve is a composite of the standard 75 usec curve and an inverted 25 usec curve. This type of record equalization would result in a high level test record that would simulate the levels normally distributed across the band after the standard equalization is applied.

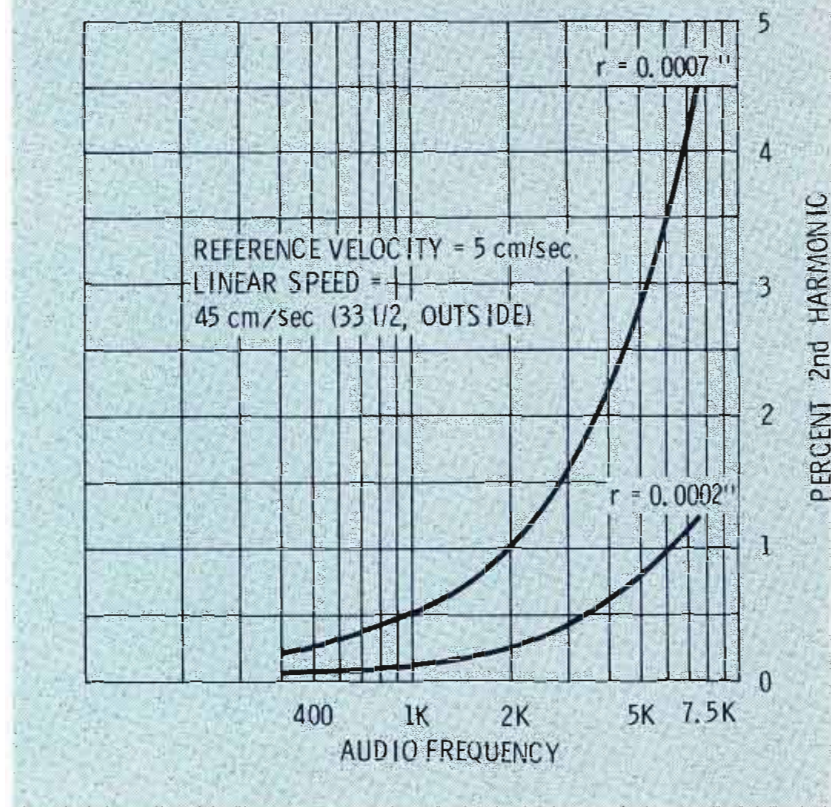


Fig. 6 Calculated values of second harmonic distortion due to tracing error that could be expected if the recording characteristics shown in Figure 5 are employed.

high frequency roll-off at the playback end of the system into account. Since the second harmonic of any of the higher frequencies would be attenuated more than the fundamental, a significant reduction of second harmonic content results.

The next curve shows the resultant second harmonic level for the closed loop; 75 usec. record equalization and complementary 75 usec. reproducing equalization, which is the standard high frequency characteristic of the RIAA or N.A.B. standards.

The last curve is a plot of the distortion for a constant velocity record characteristic when played back with normal equalization. This would result in an overall frequency response that rolls off on the high end with a 75 usec. characteristic. This has interesting implications for the FM broadcaster, because the phono output would be complementary to the transmitter's 75 usec. pre-emphasis. The break points of the curves are not exactly the same, but it is close enough that the error is negligible. If a test disk was cut with normal equalization on the low end and

flat at the high end, the phono preamp roll-off would cancel the transmitter pre-emphasis resulting in constant modulation vs. frequency when the broadcast chain is flat.

Although this kind of test would provide a very convenient method of checking overall FM frequency response, it would not provide a very good distortion check for the phono system because the average spectral distribution of energy in modern program material contains more treble energy than the unequalized recording would provide for a distortion test. On the other hand, program material does not normally contain treble energy at full level, at least not for a sustained time period. Most recent studies show the average spectral distribution to fit very well into a 25 usec. characteristic. This is one of the reasons that Dolby B for FM broadcast converts the 75 usec. curve to 25 usec.

We conclude, therefore, that the optimum recording equalization for a distortion test record would be the standard 75 usec. minus 25 usec. to simulate the average spectral content of program material. This type of test would provide a

good check of the reproducing system's ability to do its job with respect to distortion performance.

Figure 5 illustrates the composite +75, -25 usec. equalization curve that could be used. Figure 6 shows the second harmonic distortion due to tracing error that can be expected for 0.2 and 0.7 mil. styli. A peak capability test as is already contained in the C.B.S. BTR150 test record would be a worthwhile addition to the distortion test series. This test provides a series of tone bursts at 10 dB above the reference level, excellent for assuring adequate "headroom."

It is important to bear in mind that the tracing distortion is not the only source of distortion. An error in the phono pickup vertical tracking angle can also result in the generation of considerable second harmonic distortion. A 5 degree error will cause about 1 percent but if the angle is within 2 degrees, less than 1/2 percent can be expected. Fortunately though, distortions do not usually add, so, the actual performance is really amazingly good if the phono reproducing system is in good shape. We would hope that any station holding an

FCC license would maintain a reproducing system capable of meeting the distortion and response standards for type of service licensed.

Although the rules do not specifically regulate the program sources, few engineers would approve of $7\frac{1}{2}$ percent AM distortion or $3\frac{1}{2}$ percent FM distortion before the program even reaches the control console! Most broadcast phono preamps have very low distortion levels, some less than 0.1 percent, so it is the mechanical aspects of the disk reproducing system that are likely to present the greatest challenge. The N.A.B. rumble spec is -35 dB referenced to 1.4 cm/sec. at 100 Hz. This may seem like a rather loose specification, but bear in mind that this frequency falls on the low frequency boost part of the reproduce equalization curve, so, if the turntable has rumble components around 50 Hz, they will be boosted about 5dB more than the 100 Hz reference level.

The N.A.B. rumble testing procedure specifies a measurement bandpass of 10 to 250 Hz, ± 1 dB, with 6 dB/octave roll-off below 10 Hz and 12 dB per octave above 500 Hz with 500 Hz 3 dB point. If the primary rumble frequency is kept below 10 Hz, the preamp response roll-off will usually exceed the N.A.B. numbers, so, the turntable and preamp system may add less rumble noise to the distortion measurements than the rumble spec suggests.

On the other hand, a system with a lot of 50 Hz rumble will be a tough cookie to crack if the turntable rumble spec does not exceed the N.A.B. spec by much. The test procedure specifies that standard reproduce equalization should precede the metering system, which means that the very low frequencies will get a lot of boosting. At any rate, if the rumble exceeds the playback distortion, the quality of reproduction being passed on to the listener is impaired and the engineer should know about it. Not many broadcast stations have rumble meters, but most have

distortion meters or have a way of obtaining one for proof measurements. So, if some mechanical problem interferes with the phono distortion tests, the alarm flag will be raised, even if the actual measurement cannot be related to the N.A.B. spec.

Tone arm tracking error will also affect the distortion measurements as will the quality of the pickup itself. All of these factors combine to make phono distortion measurements look rather unimpressive. For this reason, not too many people brag about their phono system distortion specs: most engineers would rather talk about the preamp and its less than 0.1 percent spec. However, judicious selection of components, comprehensive testing and careful maintenance can produce startling improvements in audio quality. It is often amazing to find that records which appeared to have been distorted recordings, can be cleanly reproduced after improvements are made to the phono reproducing system. We must begin to go beyond the routine response tests and learn to accept the less than spectacular test results as reality and not shy away from distortion testing because we can't make a

less than 1 percent across the board.

To see just what kind of performance an average system could actually produce, we ran some tests using high level recorded tones; the 1000 Hz "0" level tones on the C.B.S. BTR150 and STR100 test records. The tests were performed with two different pickups installed in the tone arm, one with a 0.3 x 0.7 mil. stylus and the other with a 0.4 x 0.7 mil. stylus, both by different manufacturers. A popular broadcast type turntable with a 12" arm adjusted for optimum tracking was used for the test platform. The turntable rumble measured -40 dB which would allow for a test resolution of 1 percent distortion using a null type distortion meter. The test bands near the outside of the disk were reproduced with 2 to 3 percent distortion while the same level tones near the inside showed 4 to 5 percent. The results for both phono pickups were about the same. Preamp distortion at the same frequency was below 0.1 percent.

These figures represent **stereo** playback specs which involve both lateral and vertical modulation and are therefore the result of tracing errors in both directions at once.

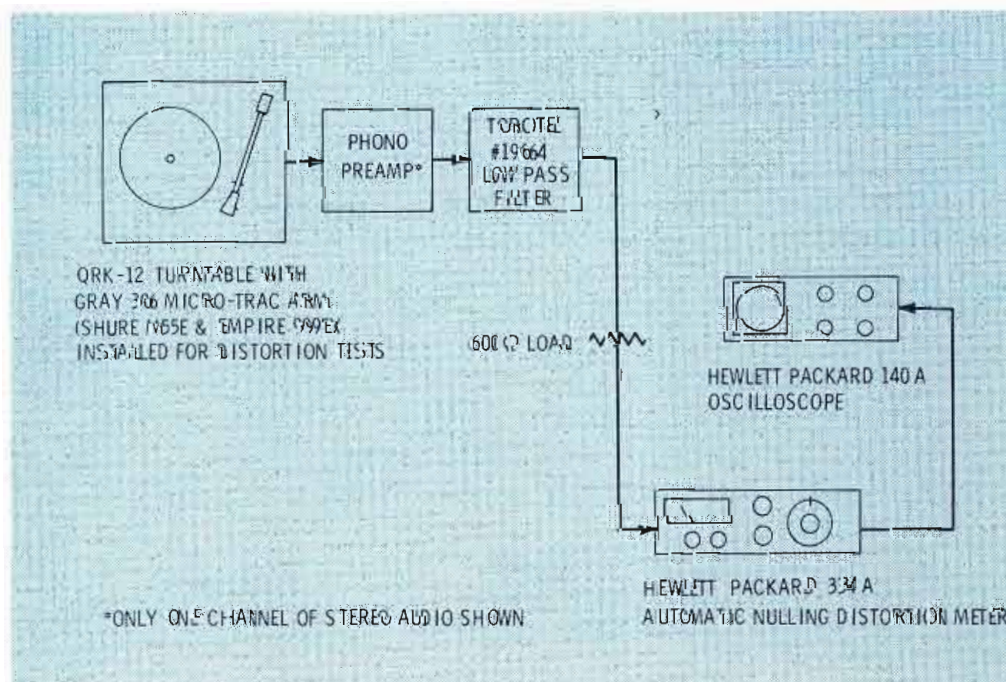


Fig. 7 Test equipment and connections for disk distortion tests. Using this setup, the distortion of the reproducing system can be tested and corrections made to minimize tracking and tracing error.

This is one of the reasons that our measured results show more distortion than the calculations for simple lateral tracing distortion would indicate.

As a matter of fact, the distortion under the same test conditions, except for lateral modulation only, was about 1.5 percent. In all cases, standard RIAA reproduce equalization was employed. Generally, the greatest playback non-linearities are due to tracking and tracing errors, so, we reoriented the phono pickup in its mounting and measured the distortion after each modification. The vertical angle was varied by shimming the front of the pickup and then the rear and the angle of the pickup with respect to the tone head center line. The end result was that we were able to reduce the stereo distortion to about 1.5 percent at the outside of the disk and to about 3.2 percent at the inner bands.

Obviously, careful use of a test record and a little time can result in more audible performance improvement than just about any other engineering endeavor around

the broadcast station. **You cannot expect to always obtain a two to one improvement in reproducing distortion, particularly if you get about 1.0 percent right off the bat, but the opportunity for increasing performance to some degree is always there just waiting for someone with a test record and distortion meter to come along and tweak it out.**

Figure 7 shows the test setup that we used, for those who wish to duplicate the tests. The turntable and phono pickups used for the tests are relatively inexpensive units and represent equipment that is likely to be in use at broadcast stations.

The 15 kHz toroid filter is not really required if distortion tests with a 1 kHz fundamental only are performed, since no significant components above 15 kHz are likely to be encountered. Be sure to check the preamp distortion and S/N ratio before starting the disk tests. The noise should be measured with the pickup installed so that any induced hum can be caught and corrected. Make sure that the

frequency response is flat before attempting the distortion checks and don't be afraid to load the pickup with other than 47K if that's what it takes to flatten out a resonant peak.

Summing Up

In summary, tape and record transducer testing is still one of the sadly neglected corners of our business. Although we hope to see high level test records and tapes produced in the near future, no manufacturer can be expected to produce something that few people will buy. Familiarity breeds interest and interest breeds experimentation and toward these ends we submit this account of our exploration of the electro-mechanical conversion with the hope of sparking increased testing in the field. If you have any questions or comments, feel free to drop us a line.

We wish to thank Jay McKnight of Magnetic Reference Laboratory and Dan Gravereaux of C.B.S. Recording Research Division for their generous gifts of time and knowledge.

Opti-ranging... a Monsanto exclusive!

Select the Counter or Counter/Timer that provides the functions you need and get AGC and Monsanto's exclusive Opti-ranging for optimum display resolution. AGC prevents erroneous measurements at marginal input amplitudes. Opti-ranging allows the selection of resolution, prevents gate change interruption of display and retains the unit value of any one decade. In contrast to autoranging, Monsanto's unique Opti-ranging offers all the advantages of automatic and manual operation without the inherent disadvantages of both. Contact your nearest Representative or write for full specifications and prices.

Prices start at **\$625.**

**9 Full Digits,
standard on all models.**

UNITED SYSTEMS CORPORATION

a subsidiary of

Monsanto

918 Woodley Road • Dayton, Ohio 45403 • Ph: (513) 254-6251 • TWX: (810) 459-1728



8500 Series — 4 models, Universal Counter/Timers 50 MHz through 1 GHz




8700 Series — 3 models, Frequency Counters 150 MHz through 1 GHz


We penetrate the San Francisco Bay Area

27 of the 39 San Francisco Bay Area FM stations have purchased Jampro FM antennas. Of the top 9 stations with 50 KW or more ERP, 8 have Jampro antennas. And for many good reasons! Better stereo performance due to lower VSWR. High power corona-free operation in foggy San Francisco mountain top transmitter locations. Join the majority of FM broadcasters in the 5th largest market in the country, serving over 1.6 million homes, with 3.3 million adults*. Buy a JAMPRO antenna, if you don't already have one! Choose from four different types to meet your particular power and coverage requirements. Phone or write us. Our experienced antenna engineers will be happy to discuss your requirements.

**Statistics available upon request*

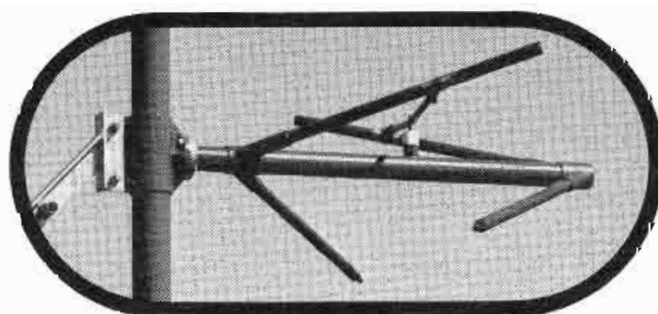

JAMPRO FM PENETRATOR ANTENNA

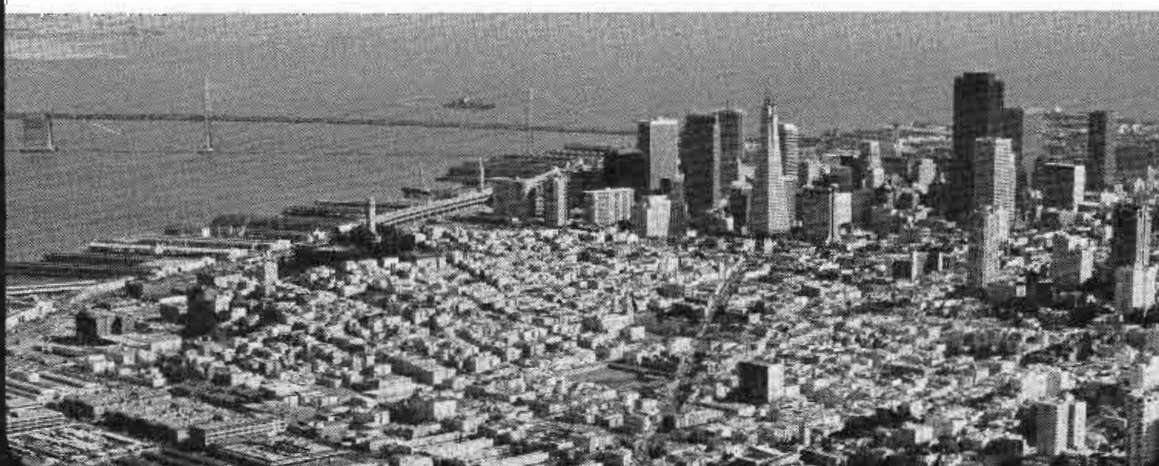

Let Jampro help you penetrate your market!

J

A

M

P

R


O

**ANTENNA
COMPANY**

A DIVISION OF
COMPUTER EQUIPMENT
CORPORATION
(916) 383-1177
6939 POWER INN ROAD
SACRAMENTO, CALIF.
95828

Avoid confusion with STATUS LIGHTS

By Pat Finnegan

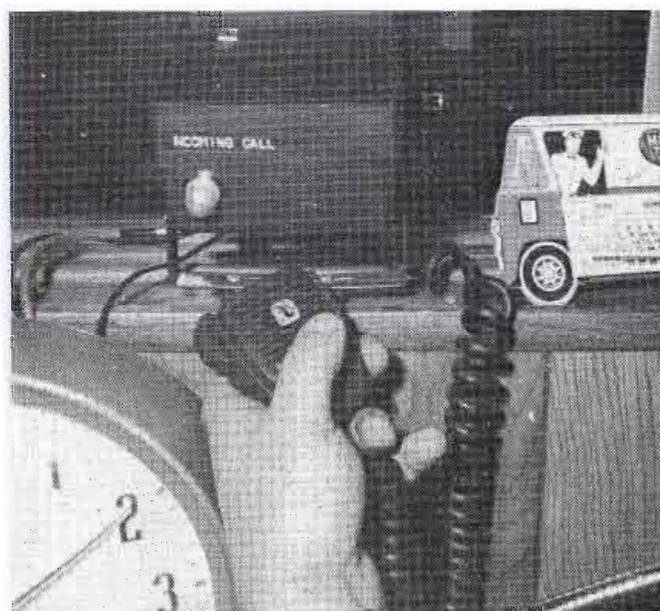

Status lights can help you avoid confusion, and they can be extremely functional in the program format. Here you see a status light that indicates incoming calls from mobile units... even though the speaker may be muted. The light is operated by a carrier operated relay in the base receiver.

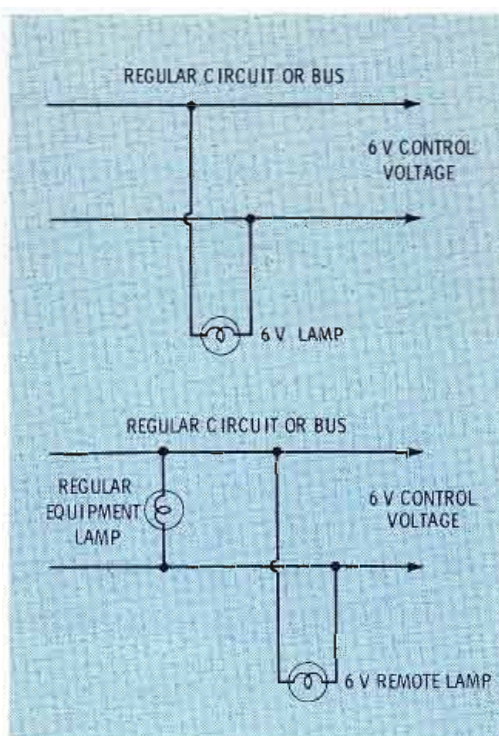


Fig. 1 These are the most common methods of adding a status light to a circuit. Care should be taken, however, to avoid changing the electronic characteristics of the circuit.

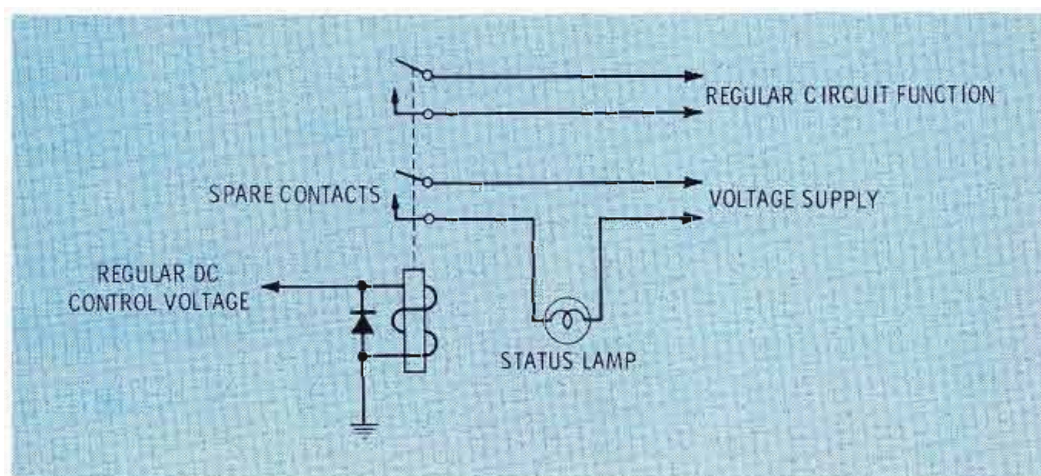


Fig. 2 Here is a simple example of how to use a relay or switch to show a condition. In this way, the status indicator is isolated from the circuit.

During multiple switching operations and at other times when special events take place, a few simple status lights wired to strategic points in the system can make the operator's life easier. At the same time, they may help avoid switching errors caused by operator confusion or forgetfulness.

Elaborate status monitoring arrays found in complex switching or automation systems are not needed in average station operations. But a few simple lights can alert the operator that certain events are happening, about to happen or should happen. Such lights can be easily added to any system.

General Methods

While there are a number of ways to operate status lights, most applications will fall within a few basic categories.

Connecting a lamp across a circuit or bus is the simplest and most common method. The lamp will draw its power from the circuit itself. If there is already a lamp in the circuit and a remote lamp is desired, the remote lamp is connected in parallel with the original one.

The use of spare contacts on a relay or switch that will operate during the times desired is the next most common method. The relay or switch has other primary duties, and the lamp switching is only a secondary function. The lamp may draw power from the relay or from an external power supply.

In circuits where IC's and transistors are directly involved, either transistors/relay combinations or relays only are used to switch the lamps. In many cases, a transistor will act directly as the switch for the lamp, the transistor driven by

One of a kind...

The first "how-to" proof of performance package that every AM chief engineer has been waiting for...



Now, for the first time, a book that tells you in step-by-step detail just how to perform all the necessary technical procedures which comprise the FCC's annual Proof of Performance Test. This in-depth analysis of each regulation and its corresponding procedure will provide you with a genuine understanding of what the FCC expects, and how the requirements can best be met.

- First proof package ever offered
- Standardized test for FCC and stations
- Includes proof forms for logging

USE THE COUPON BELOW TO ORDER

Only \$6.95
(postage paid)

BROADCAST engineering

1014 Wyandotte Street, Kansas City, Mo. 64105

Please send me _____ copies of
BROADCAST ENGINEERING'S PROOF OF
PERFORMANCE PACKAGE at \$6.95 each
(postage paid). My payment is enclosed.

Name

Address

City

State Zip

For More Details Circle (26) on Reply Card

low level DC signals or logic signals.

A status light may be used in a double duty mode, that is, the lamp indicates two separate functions

when they occur. By wiring a resistor in series with the lamp, during turn on by the first function, it will glow at less than full brilliance. A set of contacts from a different

circuit function, when operated, will short out the resistor, causing the lamp to glow at full brilliance, indicating the second function is taking place.

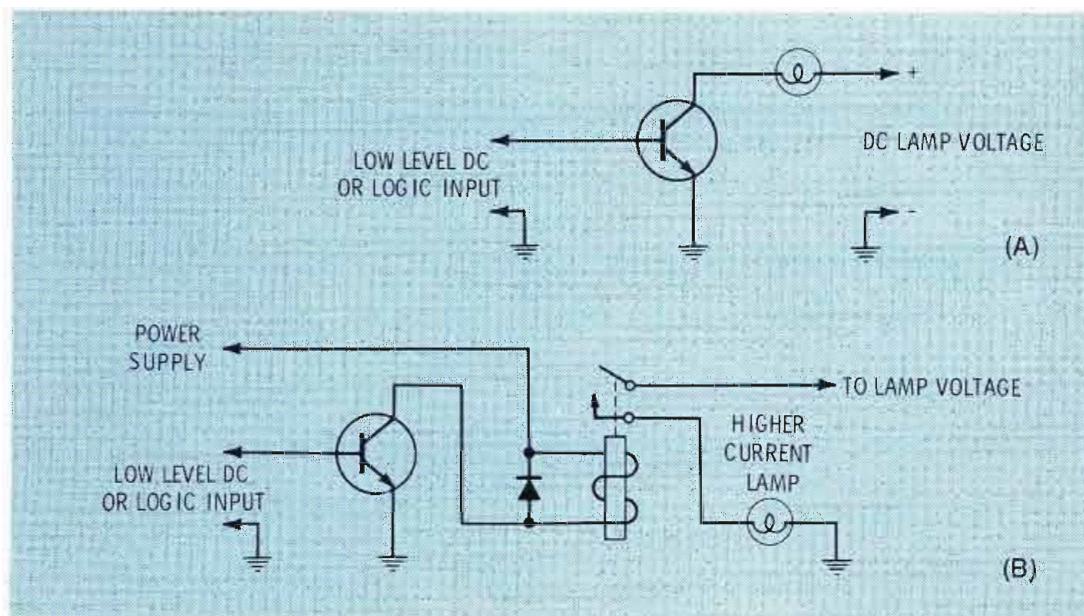



Fig. 3 Here are two ways to use a transistor as an interface. In (A), directly as a switch. In (B) it is used to operate a relay when the lamp requires more current than a transistor can carry.

Design Your Own

Although complicated circuitry is not necessary to operate status lights, a few basic principles should be given consideration in your design.

A lamp added at any point in an operating system should have no adverse effect upon that system. If the lamp obtains its power from the system internal power supply, care must be exercised that the additional current drawn by the lamp or lamps do not overload the power supply or damage components in its feeder system. Although many incandescent lamps are physically small, they still draw appreciable current.

IT KEEPS MANNIX FROM SHOOTING MARCUS WELBY.

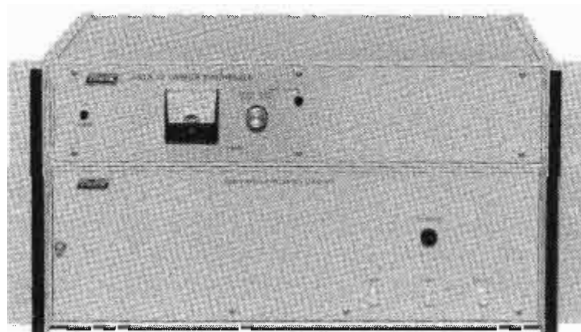


Tracor Model 6500 Visual Carrier Generator. Reduces co-channel interference. Increases TV coverage area.

It's 100 times more stable than any crystal oscillator system. Ends routine monitoring, standardization procedures, adjustments. Eliminates much external test equipment. Combines the 304D Rubidium Frequency Standard with the 650A TV Carrier Synthesizer. Just plug the 6500 system into the transmitter socket previously occupied by the quartz crystal. Without further attention, unaffected by environmental conditions, it will keep your station's carrier frequency stable within .05Hz per year. The 6500 is FCC approved and already in wide use. Write or call for full technical and application information.

Tracor, Inc.

Industrial Instruments
6500 Tracor Lane • Austin, Texas 78721 • AC 512/926-2800

FOR CHROMA PROBLEMS...

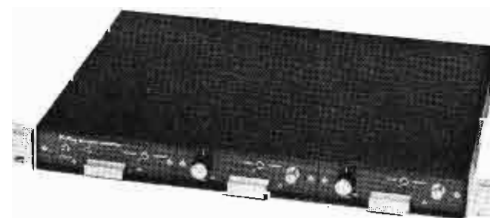

We all know chroma should be right when it reaches your station — but take a look at it. If you are receiving low chroma with some envelope delay, the Matthey Chroma Corrector can cure it FAST.

One knob gives you control over $\pm 40\%$ chroma level and another over $\pm 100\text{ns}$ chroma delay. Adjusting the chroma does not effect the luminance signal.

It has bypass, remote control and is right for NTSC video. Use it for cleaning up chroma after distortion by microwave link, or use it at VTR output for up-rating your VTR performance.

You'll like its small size, fast operation, effectiveness, AND low cost.

Television Equipment Associates, Inc.

BILL PEGLER 516 • 628-8068

Box 1391 • BAYVILLE, N. Y. 11709



Management highlights

Pat has shown how a lot of confusion can be avoided by using status lights to indicate conditions that operators should be aware of. In some cases, you can see that status lights can improve the program format by making the operator(s) more efficient.

The danger, of course, is that you can go overboard with status lights to the point that they actually add confusion. First, think about your operation and where irritating operating problems occur. You'll probably find a circuit here that will eliminate that problem. As long as you stick to solving problems, you'll improve your operation.

When many lamps are being added to an operating system, a special power supply should be built that will supply power only to the lamps and associated relays. This power should be isolated from internal power supplies by the use of "dry contacts" on relays or switches.

Strong RF fields can induce currents in long remote cable leads and allow interference to enter the equipment in this manner. When strong fields are present, shielded cable should be used for the lamp runs.


Techniques

How a lamp will be operated when applied to a circuit will often be dictated by the circuit itself. But when there is a choice of methods, here are a few of the many techniques possible.

The **switched ground** technique has developed with solid state equipment and can be used to switch a lamp also, especially from a remote location. There is nothing complicated about it, the ground return side of the circuit is switched rather than the voltage side. This method has the advantage of reduc-

ing transients into the equipment, since static or similar transients are usually positive going voltage. Also, should the cable become shorted, the only adverse effect will be a continuously burning lamp rather than a blown fuse in the power supply. However, if the lamp is at a remote location from the power supply, then it makes no difference which way the switch is done since the high side of power must be routed to the lamp anyway.

A transistor as a switch or an interface is another technique, especially useful when working directly with IC's or transistors. An IC normally cannot carry the current draw of a relay or of a lamp. As an interface or a switch, the transistor can be turned on by low level DC signals from the IC's or logic signals. If the lamp level of current is a high value, the transistor can turn on a relay which will handle the higher current through its contacts. When selecting a transistor for this application, the relay coil or lamp

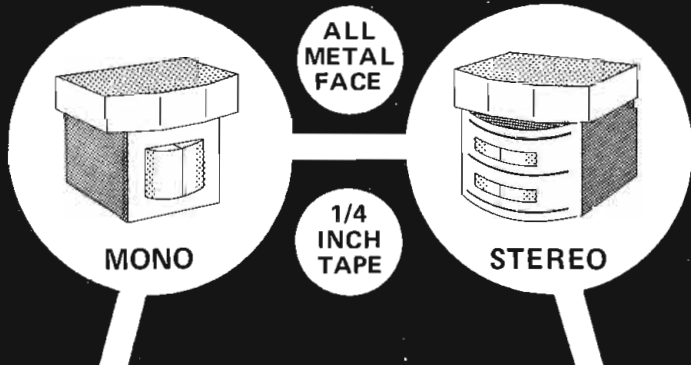



FLUTTER BAR RECONDITIONING



NON-POPPING GATE SPRING MODIFICATION



FOR OLDER MODELS: POLE PIECES CAPS W/GUIDES REPLACEMENT HEADS

DIRECT REPLACEMENT HEADS

MMI HEADS EQUAL OR EXCEED ORIGINAL EQUIPMENT SPECS.

SEND US YOUR ASSEMBLY. We will ultrasonically clean everything — install new heads if yours cannot be relapped — replace any worn or missing minor hardware — adjust — test — ship back **PRE-PAID** your assembly (not some other).


36 HOUR SERVICE — LOANERS AVAILABLE

INSTALL YOURSELF. Buy MMI heads with complete written and pictorial instructions.



8125 PLEASANT AVE SO MINNEAPOLIS, MINN 55420
(612) 884-7393

NEW RINGBACK ANTENNA by Mark

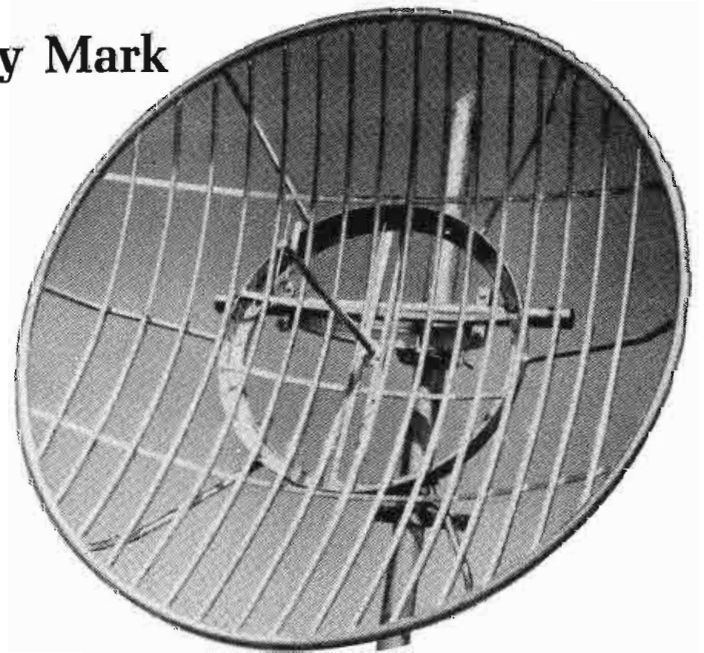

Simplifies Alignment • Speeds Installation

Low profile ringback frames available on all Mark Grid Parabolic Antennas. 3-point mounting greatly reduces path alignment and installation time.


Ringbacks further improve already extremely low wind loading characteristics of Mark Grid Antennas compared to solid dish type parabolics. Frequency range 400-900 MHz, 2GHz. Others available on special application. Nest 4 to a crate. Write:

ANIXTER-MARK
Originators of the grid antenna.

5439 W. Fargo
Skokie, Ill. 60076
(312) 675-1500

For More Details Circle (29) on Reply Card

For More Details Circle (30) on Reply Card

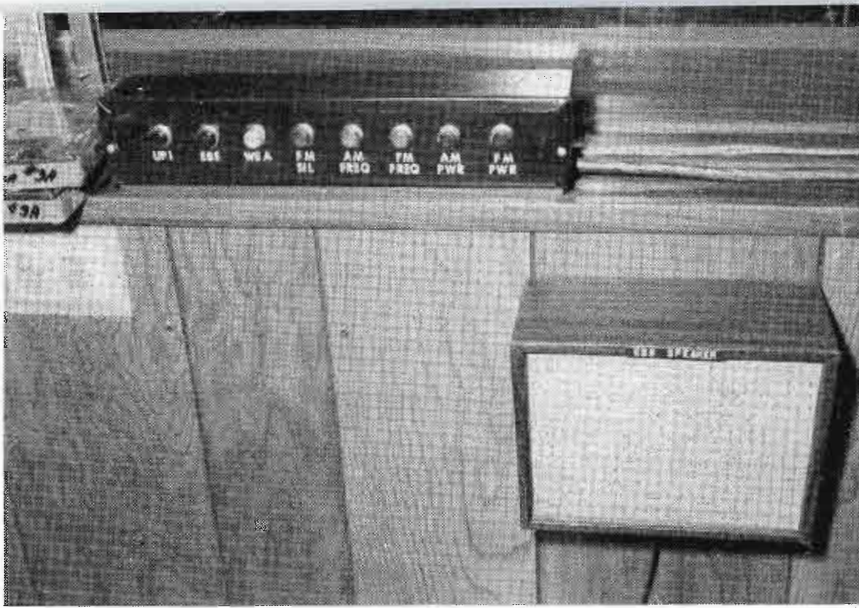

This status indicator panel used at WLBC shows which alarm has gone off.

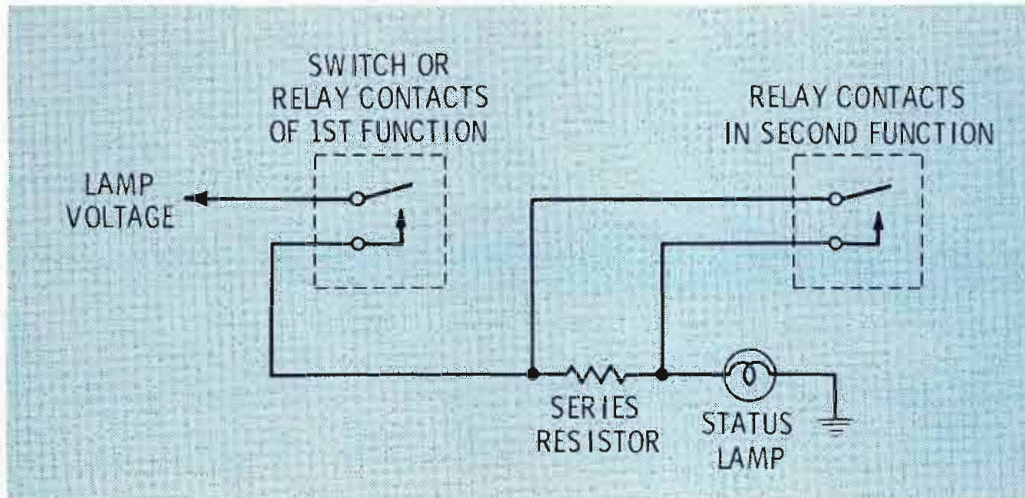


Fig. 4 Here's how you can make the lamp provide a second indication while the first function is still in operation. You'll note that shorting the resistor will make the lamp glow brighter.

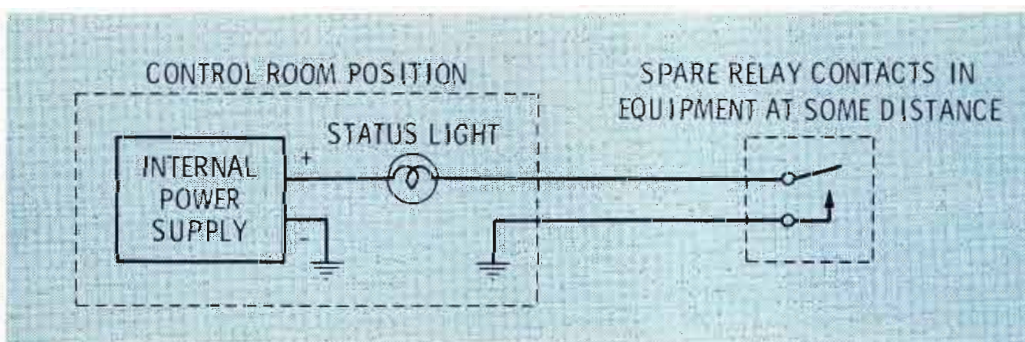


Fig. 5 This is an example of the switched ground technique.

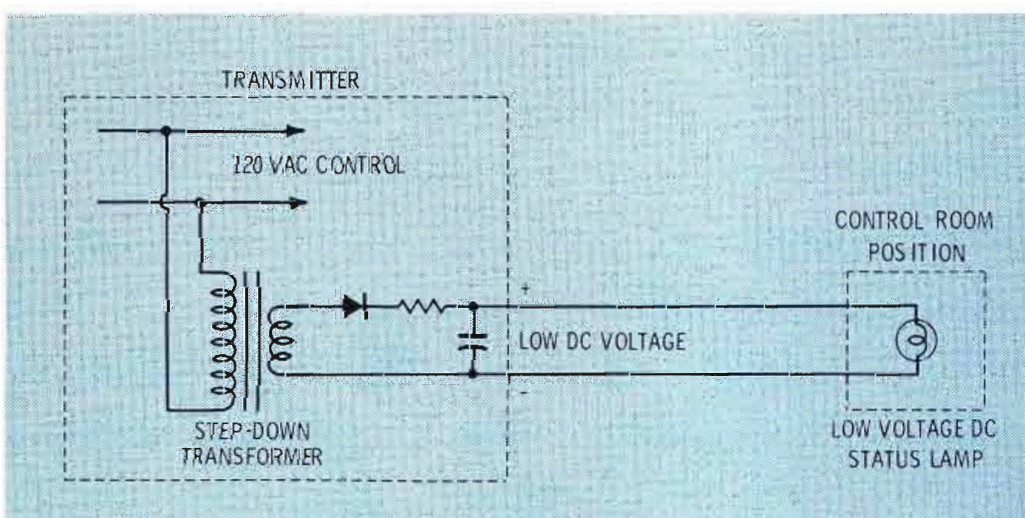


Fig. 6 When a 120 VAC circuit must be monitored at a distance, use a step-down transformer and a rectifier to send low voltage DC to the lamp.

current will flow through the transistor, so the one selected should have adequate power rating.

Other applications require a very large and bright light as can be supplied by 120 VAC. If this light circuit is to monitor one that is solid state, it is important that the 120 VAC be isolated from the low level solid state circuits. Even the field around the AC circuit can be damaging to sensitive solid state elements. The best device in this application would be the solid state relay. Isolation is provided by the photo-optics in the relay, and the relay can be turned on by logic levels from the solid state equipment.

If the circuits that are to be monitored are only 120 VAC or higher, such as found in a transmitter, it is not desirable to route this high AC voltage out through low voltage switching or monitoring circuits. A step-down voltage transformer will provide the safest method. The transformer is located at the higher voltage location and a further refinement can be obtained by rectifying the low level AC voltage into a DC voltage for routing to the remote point.

Maintenance

Whether the status lights are those in a large system, individual lights on separate equipment items, or lights the station has added to a system, most can be afflicted with common problems.

Troubleshooting failures in lamp circuits, particularly a multi-light system, can prove difficult if the only information provided is that of a hazy memory. When designing and installing status lights, even if only a single lamp added to a piece

of equipment, make some clear drawings that can be read at some later date when trouble develops. On a single lamp to a piece of equipment, the information can be drawn in on the regular schematic.

One major fault that can afflict any light system is the application of over-voltage to the lamps, resulting in very short lamp life. Many power supplies, (both commercial and home-brew) that provide power only for lamps, are unregulated. Design often concerns itself mostly with providing an adequate current capacity for the expected number of lamps in use. But seldom are all the lamps turned on at the same time, and at other times there may be none turned on. At such times, the output voltage of the transformer or rectifier can rise to almost the peak value of the AC voltage. As lamps are turned on, the load will pull down that voltage depending upon the load at the time. For example, a 24 Volt DC supply with only one or two lamps drawing current can be supplying over 30 Volts to those lamps. The lamps will glow very brightly, but they will also have a very short life!

The real solution to overvoltage is regulation of the power supply if possible. This can be done with zener diodes, or if the transformer can handle it, add a bleeder resistor across the supply to draw an amount of current that will hold the voltage within limits. But you must remember the full load situation when all the lamps are on. The transformer can become overloaded, or the voltage will be so low that the lamps are very dim.

Transistors can be the victim of lamp over-voltages. When higher than rated voltage is applied to the lamp, it will draw more than normal current. If this current is passing through a transistor used as a switch, the transistor can fail when it is used as a switch. It a situation where the lamp and transistor are designed only for an intermittent duty cycle, something else may fail causing the equipment to stay on continuously. The equipment in turn will cause the lamp to remain on. Current flowing through the transistor in this continuous duty manner will cause it to overheat

and probably fail.

As mentioned earlier, an over-bright lamp is a sure sign of an over-voltage situation, and this can be used as a clue in troubleshooting. If the overbright lamp is operated from the regulated power supply of the equipment itself, something has caused it to lose regulation and its output voltage is now higher than normal. But this voltage is not only fed to the lamp, it is supplying the other solid state circuitry also. The high voltage will damage many of the transistors and IC's unless it is corrected quickly. Thus a bright light in this situation can be a clue to an alert operator to check the power supply and correct the situation before further damage occurs.

A large automation system will have many lights. These are not merely "dress lights" but serve a useful function. When lamps burn out, it is important that they be replaced as soon as possible. It can be very confusing to have more than one machine operating at once and not knowing which one is on the air and which one is cueing up. Such a system, however, can have a number of different voltage lamps in use. So it is important to use the correct one for replacement. Many of the miniature lamps look the same physically, but the type number on them will tell you which to use. A 28 Volt lamp, for example, plugged into a 6 Volt socket will barely light if at all, while a 6 Volt lamp plugged into a 28 Volt socket will burn out immediately.

Longer lamp life can be obtained in many cases by the use of over rated lamps. That is, use a 28 Volt lamp in a 24 Volt socket, etc. Of course, the lamp will be dimmer, but if the situation can tolerate a dimmer light the life will increase remarkably.

Summary

A few status lights can prove very helpful in the average station operational system. But overdoing the job and adding lights for the sake of lights, will only make the situation confusing and negate the purpose of adding them in the first place. □

FIDELIPAC® ACCESSORIES & CARTRIDGES

CART-A-ROUND CARTRIDGE STORAGE RACKS

Each WR-25 Modular Rack holds 25 Type A Cartridges . . . eight can be mounted on our Mobile Carousel Base to make up the MR-200.

WR-25 \$13.25
MR-200 \$145.95





TABLE TOP CARTRIDGE RACK

Model TR-96 holds 96 Type A cartridges, Model TR-48 holds 48.

TR-96 \$73.85
TR-48 \$38.55

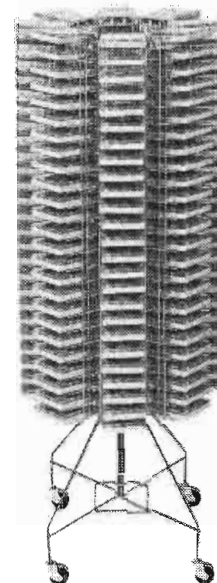

STUDIO ON AIR LIGHT

brilliant red lettering on jet black background can be seen even in the brightest ambient light conditions. \$29.95



CART-E-RASE DEMAGNETIZER

can be used for erasing cartridges, reel-to-reel tape, film sound stripping, etc. \$34.50



ALIGNMENT PROBLEM?

Keep your cart equipment in perfect working order with:

- 350 STA Alignment Cartridge \$38.50
- 350 STF Wow and Flutter Cartridge \$24.50
- 350 STQ Cue Test Cartridge \$35.00
- Head Insertion Gage \$3.35
- Height Gage \$12.95



Contact your Fidelipac Distributor or

FIDELIPAC®

A Division of TelePro Industries Incorporated
109 Gaither Drive, Mt. Laurel, NJ 08057
(609) 235-3511

® Trademark of TelePro Industries Incorporated

Workshop in digital math

Part 5 of a series/By Harold Ennes

These practice problems will enable you to double-check how well you have absorbed previous material. The Part number of the text to be reviewed is indicated after each exercise number. Solve each exercise on your own, (with the help of a suitable review if necessary), before checking the solution.

1. (Part I). Convert the following binary numbers to their decimal (base 10) equivalents:

- (a) 101001.01
- (b) 1011.1111
- (c) 11101010.101
- (d) 0001.0001

2. (Part I). Find the binary sum and give decimal equivalent of:

- (a) 1000 + 1001
- (b) 1101.1 + 1000.101
- (c) 0000.1110 + 0001.1110
- (d) 0000.11111 + 0011.111

3. (Part I and Part IV). Find the difference of the following by two methods; straight arithmetical as in Part I, and by using complements as in Part IV.

- (a) 1110-0110
- (b) 101001 - 001010

4. (Part II). Find the products by over-and-over addition:

- (a) 1011 X 1110
- (b) 1011 X 11010

5. (Part II). Find the following quotients. Remember that a quotient, in math, is the result of division; the number of times one quantity is contained in another. Therefore, solve by two different methods: straight arithmetical division, and by over-and-over subtraction.

- (a) 100100/1100
- (b) 1000/0010

6. (Part III). Convert following decimal numbers to binary notation:

- (a) 124.875
- (b) 250
- (c) 0.53125
- (d) 187.625

7. (Part III). Write the following decimal numbers in BCD:


- (a) 864.2
- (b) 1,087
- (c) 25.8
- (d) 265

8. (Part III). Convert the following binary numbers to octal:

- (a) 1000110100
- (b) 111100100.01


9. (Part III). Convert following octal values to decimal using binary as intermediary:

- (a) 744.2
- (b) 1064
- (c) 272.5
- (d) 31.7

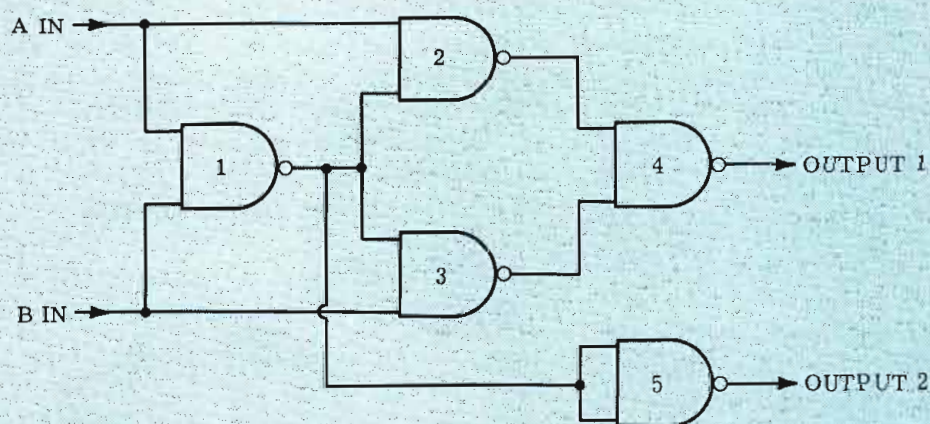

TRUTH TABLE			
INPUTS		OUTPUTS	
A	B	1	2
0	0		
0	1		
1	0		
1	1		

Fig. 17 Logic diagram and truth table (to be completed) for exercise 13.

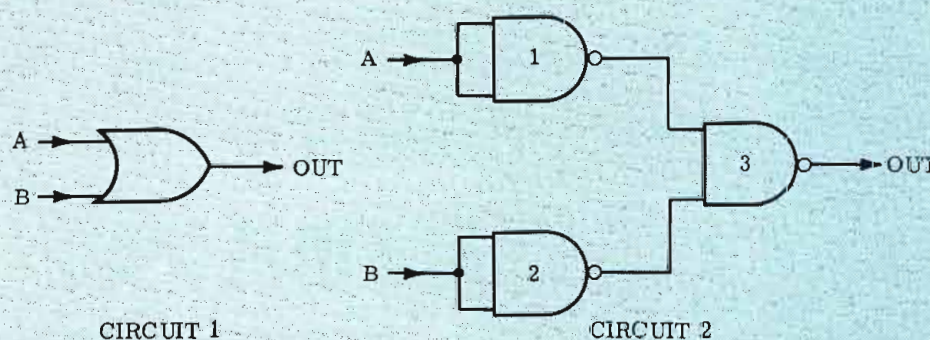

TRUTH TABLE			
INPUTS		OUTPUTS	
A	B	CIRCUIT 1	CIRCUIT 2
0	0		
0	1		
1	0		
1	1		

Fig. 18 Logic diagrams and truth table (to be completed) for exercise 14.

10. (Part III). Convert following octal numbers to decimal using straight octal conversion (no intermediary):

- (a) 31.1
(b) 1064

11. (Part III). Read aloud the Boolean expressions:

- (a) AB
(b) $A+B$
(c) $\overline{AB}$
(d) $\overline{A+B}$

12. (Part IV). Solve by additive method:

- (a) $110101 - 001011$
(b) $1111 - 11010$
(c) $1110101 - 1111010$
(d) $(1001\ 0100) - (0001\ 0010)$ This is BCD.
(e) $(0001\ 0010) - (1001\ 0100)$ This is BCD.

13. (Part III). Complete the truth table for logic diagram in Figure 17.

14. (Part III). Complete the truth table for the logic diagrams of Figure 18.

Solutions To Exercises

1. (a) $32+8+1+0.25 = 41.25$
(b) $8+2+1+0.5+0.25+0.125+0.0625 = 11.9375$
(c) $128+64+32+8+2+0.5+0.125 = 234.625$
(d) $1+0.625 = 1.0625$

2. (Review Table 3 and examples, Part I).

$$\begin{array}{r} 1000 \quad (8) \\ +1001 \quad (9) \\ \hline 10001 \quad (17) \end{array}$$

$$\begin{array}{r} 1101.100 \quad (13.5) \\ +1000.101 \quad (8.625) \\ \hline 10110.001 \quad (22.125) \end{array}$$

$$\begin{array}{r} 0000.1110 \quad (0.875) \\ +0001.1110 \quad (1.875) \\ \hline 0010.1100 \quad (2.75) \end{array}$$


$$\begin{array}{r} 0000.1111 \quad (0.96875) \text{ Note: } 2^{-5} = 0.03125 \\ +0011.1110 \quad (3.875) \\ \hline 0100.1101 \quad (4.84375) \end{array}$$

3. (a) arithmetical: $\begin{array}{r} 1110 \\ - 0110 \\ \hline 1000 \end{array}$

complement: $\begin{array}{r} 1001 \quad (\text{inverted } 0110) \\ + \quad 1 \\ \hline 1010 \quad (\text{complement of } 0110) \\ \text{add } 1110 \\ \hline 11000 \quad (\text{answer}) = +8 \end{array}$

(b) arithmetical: $\begin{array}{r} 101001 \\ -001010 \\ \hline 011111 \quad (\text{ans}) \end{array}$

Cooke Model 712 Master Clock and Time Distribution Systems

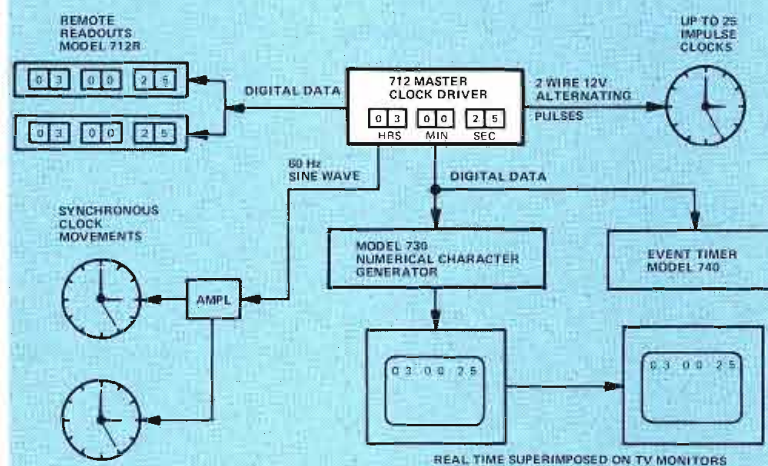

Timing excellence for the small station — only \$1250.

- High intensity 12 or 24 hour digital readout.
- Accuracy of 1 second per month from internal time base. Also accepts external reference.
- Includes double count and fractional second controls.
- Auto switching to DC battery power if AC is lost.
- Master operates remote digital readouts, synchronous movements, and impulse clocks.
- Digital data output controls Cooke Event Timers, Numerical Character Generators and other equipment.

Cooke Engineering Company

Division of Dynatech Laboratories, Inc.
900 Slaters Lane • Alexandria, Va. 22314 • 703/548-3889

ANSWERS TO
EXERCISE 6

	256	128	64	32	16	8	4	2	1	.	0.5	0.25	0.125	0.0625	0.03125
(A)			1	1	1	1	1	0	0	.	1	1	1		
(B)	1	0	0	0	0	0	1	1	0	.					
(C)									0	.	1	0	0	0	1
(D)		1	0	1	1	1	0	1	1	.	1	0	1		

Fig. 19 Solution to exercise 6.

Procedure for above (review Table 6 and examples of Part I) is as follows, starting with LSD as 1st digit:
1st digit: $1-0 = 0$.

1st digit: $1-0 = 0$.

2nd digit: $0-1 =$ difference of 1 and borrow 1.

3rd digit: no 1 exists to borrow yet, so 0 in top row becomes 1 and $1-0 = 1$ with borrow 1 carried over.

4th digit: now a 1 exists to borrow, so 1 in top row becomes 0 and $0-1 =$ difference of 1 and borrow 1.

5th digit: no 1 to borrow, so 0 top row becomes 1 and $1-0 = 1$ with borrow 1 carry over.

6th digit: now a 1 exists to borrow, so 1 in top row becomes 0 and $0-0 = 0$. Prove answer by noting that decimal equivalent is $41-10 = 31$. Note that this procedure is cumbersome relative to the following **complementary** operation:

(b) complement: 110101 (inverted 001010)

$$\begin{array}{r} 110101 \\ + \quad 1 \\ \hline 110110 \text{ (complement of 001010)} \\ \text{add } 101001 \\ \hline 1011111 = +011111 = 31 \end{array}$$

4. (a) 1011×1110

Accumulator	Multiplier	Operation
00000000	1110	Move multiplicand 1 space left -
10110		add
10110	1100	Move multiplicand 2 spaces left -
1011--		add
1000010	1000	Move multiplicand 3 spaces left -
1011---		add
10011010	0000	Answer = 154 ($11 \times 14 = 154$)

(b) 1011×11010

Accumulator	Multiplier	Operation
000000000	11010	Move multiplicand 1 space left -
1011-		add
10110	11000	Move multiplicand 3 spaces left -
1011---		add
1101110	10000	Move multiplicand 4 spaces left -
1011----		add
100011110	00000	Answer = 286 ($11 \times 26 = 286$)

5. (a)
$$\begin{array}{r} 0011.0 \text{ (answer)} \\ 1100 \overline{) 100100} \\ \underline{1100} \\ 1100 \\ \underline{1100} \\ 0000 \end{array}$$
 straight arithmetical division

$$\begin{array}{r} 100100 \\ - 1100 \\ \hline 11000 \text{ First subtraction} \\ - 1100 \\ \hline 1100 \text{ Second subtraction} \\ - 1100 \\ \hline 0000 \text{ Third subtraction} \end{array}$$
 over-and-over subtraction

Answer is decimal 3 = binary 0011

(b)
$$\begin{array}{r} 0100 \text{ (ans)} \\ 0010 \overline{) 1000} \\ \underline{10} \\ 0000 \end{array}$$
 straight arithmetical division

Over-and-over subtraction:

$$\begin{array}{r} 1000 \\ -0010 \\ \hline 0110 \text{ (First subtraction)} \\ -0010 \\ \hline 0100 \text{ (Second subtraction)} \\ -0010 \\ \hline 0010 \text{ (Third subtraction)} \\ -0010 \\ \hline 0000 \text{ (Fourth subtraction)} \end{array}$$

Answer is decimal 4 = binary 0100

6. See Figure 19 for answers. If necessary, review operations given in Figure 8 (Part III).

7. (a) $1000 \quad 0110 \quad 0100.0010$
 (b) $0001 \quad 0000 \quad 1000 \quad 0111$
 (c) $0010 \quad 0101. \quad 1000$
 (d) $0010 \quad 0110 \quad 0101$

8. (a)
$$\begin{array}{cccc} 001 & 000 & 110 & 100 \\ \hline 1 & 0 & 6 & 4 \end{array}$$
 binary 1000110100
 = octal 1064

$$(b) \underbrace{111}_7 \underbrace{100}_4 \underbrace{100}_4 . \underbrace{010}_2 \text{ binary } 111100100.01$$

$$= \text{octal } 744.2$$

9. octal : $\underbrace{7}_4 \underbrace{4}_4 \underbrace{4}_4 . \underbrace{2}_2$
 4-2-1 binary : $\underbrace{111}_{100} \underbrace{100}_{100} . \underbrace{010}_{010}$
 = pure binary: 111100100.010
 = $256 + 128 + 64 + 32 + 4 + 0.25 = 484.25$ decimal

(b) octal : $\underbrace{1}_4 \underbrace{0}_4 \underbrace{6}_4 \underbrace{4}_4$
 4-2-1 binary: $\underbrace{001}_{100} \underbrace{000}_{100} \underbrace{110}_{100} \underbrace{100}_{100}$
 = pure binary: 001000110100
 = $512 + 32 + 16 + 4 = 564$ decimal

(c) octal : $\underbrace{2}_4 \underbrace{7}_4 \underbrace{2}_4 . \underbrace{5}_2$
 4-2-1 binary: $\underbrace{010}_{100} \underbrace{111}_{100} \underbrace{010}_{100} . \underbrace{101}_{010}$
 = pure binary: 010111010.101
 = $128 + 32 + 16 + 8 + 2 + 0.5 + 0.125 = 186.625$ decimal

(d) octal : $\underbrace{3}_4 \underbrace{1}_4 . \underbrace{7}_2$
 4-2-1 binary: $\underbrace{011}_{100} \underbrace{001}_{100} . \underbrace{111}_{010}$
 = pure binary: 011001.111
 = $16 + 8 + 1 + 0.5 + 0.25 + 0.125 = 25.875$ decimal

10. Refer to Table 7, Part III.

(a) octal 31.1 = $(3 \times 8^1) + (1 \times 8^0) + (1 \times 8^{-1})$
 = $(3 \times 8) + (1 \times 1) + (1 \times 0.125)$
 = $24 + 1 + 0.125 = 25.125$ decimal

(b) octal 1064 = $512 + 48 + 4 = 564$ decimal

11. (a) $\overline{AB}$ reads "A and B"

(b) $\overline{A+B}$ reads "A or B"

(c) $\overline{AB}$ reads "Not A and B", "inverted A and B"

(d) $\overline{A+B}$ reads "Not A or B", "inverted A or B"

12. (a) 110100 (inverted 001011)

$$+ \quad \quad 1$$

$$\underline{110101} \text{ (complement of 001011)}$$

add $\underline{110101}$

$$\underline{1101010} = +42$$

(b) 00101 (inverted 11010)

$$+ \quad \quad 1$$

$$\underline{00110} \text{ (complement of 11010)}$$

add $\underline{1111}$

$$\underline{00101} = -0101$$

recomplement: $\underline{1010}$

$$+ \quad \quad 1$$

$$\underline{1011} = -1011 = -11$$

(c) 0000101 (inverted 1111010)

$$+ \quad \quad 1$$

$$\underline{0000110} \text{ (complement of 1111010)}$$

add $\underline{1110101}$

$$\underline{01111011} = -1111011$$

recomplement: $\underline{0000100}$ (inverted)

$$+ \quad \quad 1$$

$$\underline{0101} = -0101 = -5 \text{ decimal}$$

VIDIFONT.[®] The broadcasters' choice.

Everywhere you look, discriminating broadcasters are turning to CBS Laboratories' Vidifont. You'll find it in over 100 key stations of every affiliation around the country. And in other principal markets around the world. In fact, Vidifont has gained such wide acceptance, it's become the international standard of the industry.

The reasons? Maximum legibility for one. The character design of each of our fonts is the result of long, care-

ful research. You get optimum height, shape, thickness and spacing. And the crisp, professional look.

Another reason is flexibility. Vidifont offers a range of standard features second-to-none in the industry.

Finally, the most important reasons of all. Vidifont electronic character generators mean quality and reliability.

Like to see Vidifont in actual on-air formats? Just give us a call at (203) 327-2000. Ask for Vidifont sales.

CBS LABORATORIES

A Division of CBS Inc.
227 High Ridge Road, Stamford, Connecticut 06905



For More Details Circle (33) on Reply Card

$$\begin{array}{r}
 \text{(d) } 1110 \quad 1101 \quad (\text{inverted subtrahend}) \\
 + \quad \underline{1} \quad \underline{1} \\
 1111 \quad 1110 \quad (\text{complement of subtrahend}) \\
 \text{add } 1001 \quad 0100 \\
 \hline
 11000 \quad 10010 = \text{BCD } 1000 \quad 0010 = 82 \text{ decimal}
 \end{array}$$

Note that the complementary method of computation is the same for BCD as for pure binary. Just remember to add 1 to **each** group of 4-bits.

$$\begin{array}{r}
 \text{(e) } 0110 \quad 1011 \quad (\text{inverted subtrahend}) \\
 + \quad \underline{1} \quad \underline{1} \\
 0111 \quad 1100 \quad (\text{complement of subtrahend}) \\
 \text{add } 0001 \quad 0010 \\
 \hline
 01000 \quad 01110 = -(1000 \quad 1110)
 \end{array}$$

$$\begin{array}{r}
 \text{recomplement: } 0111 \quad 0001 \quad (\text{inverted}) \\
 + \quad \underline{1} \quad \underline{1} \\
 1000 \quad 0010
 \end{array}$$

$$\text{recomplemented} = -(1000 \quad 0010) = -82 \text{ decimal}$$

13. The symbols of Figure 17 indicate all NAND gates. The small circle on the output indicates the output is 0 **only** when simultaneous 1's occur at the input. The output is a "1" at all other times.

See Figure 20 for the completed Truth Table. Reason as:

TRUTH TABLE				
CONDITION	INPUTS		OUTPUTS	
	A	B	1	2
1	0	0	0	0
2	0	1	1	0
3	1	0	1	0
4	1	1	0	1

Fig. 20 Completed truth table for Figure 17.

Condition 1. Since A and B are both 0, gate 1 output is high. (1). Gates 2 and 3 receive this 1 at one input, but a 0 from A and B inputs. So gates 2 and 3 outputs are both 1's, thus gate 4 will have simultaneous 1's at the input, resulting in low (0) at Output #1. Gate 1 feeds paralleled inputs (both inputs tied together) of gate 5. Since gate 1 output is high, gate 5 will be low (0) at Output #2.

Condition 2. B input now a 1 while A input is a 0. So gate 1 output is still a 1, and you know immediately that Output #2 is still a 0. The 1 from input B and the 1 output of gate 1 makes gate 3 a 0 output. Gate 2 has inputs of 1 and 0, so its output is a 1. Therefore gate 4, having a 0 and a 1 input, goes high (1) for Output #1.

Condition 3. A now a 1, with B a 0. Note that the overall result is the same as for condition 2.

Condition 4. A and B both 1, making gate 1 a 0

output. Thus gate 5 goes to a 1 at output #2. The 0 out at gate 1 feeds one of the inputs of gates 2 and 3, while 1's are injected at the opposite inputs from A and B. So gates 2 and 3 will both a high (1) output, giving gate 4 simultaneous 1's at its inputs. Therefore gate 4 produces a 0 for Output #1.

If you now study your completed Truth Table, you will see that Output #1 could be called the **sum**, and Output #2 the **carry**. The overall circuit satisfies the following addition table:

A	B	Sum	Carry
0	0	0	0
0	1	1	0
1	0	1	0
1	1	0	1

14. Circuit 1 should be recognized as an OR gate. The symbol and Truth Table was given by Figure 12, Part III.

Circuit 2 indicates 3 NAND gates. Gates 1 and 2 have inputs tied together. Following the reasoning of the solution to exercise 13, you should be able to complete the Truth Table as shown by Figure 21. Note

TRUTH TABLE			
INPUTS		OUTPUTS	
A	B	CIRCUIT 1	CIRCUIT 2
0	0	0	0
0	1	1	1
1	0	1	1
1	1	1	1

Fig. 21 Completed truth table for Figure 18.

that the hookup of these NAND gates forms an OR gate, and could be replaced by the symbol of circuit 1.

Don't Stop Here

This entire series has hopefully enabled those of you needing help to overcome your initial "mental block" to digital math. But it admittedly serves only as the "kindergarten" grade in your complete training. There are many more "codes" than those covered in this study. There are many different procedures, many more challenges, many more opportunities.

If you have applied yourself to the contents of previous text, and have really "digested" the operations outlined, you will have little difficulty in mastering more advanced studies. You will have constructed a solid foundation upon which to build your future growth.


Author's Note

Re/Digital Math, Part 3 in the November issue, page 59, middle column, lines 13-14-15-16 from the top should read:

Octal 2 6 . 1
 ↓ ↓ ↓
 Binary 010 110 . 001 =
 Pure binary 10110.001 (This was shown as 101110.001)

IKEGAMI TK-355

**"...super-reliable
low-cost color camera"**
says Midwest Teleproductions.

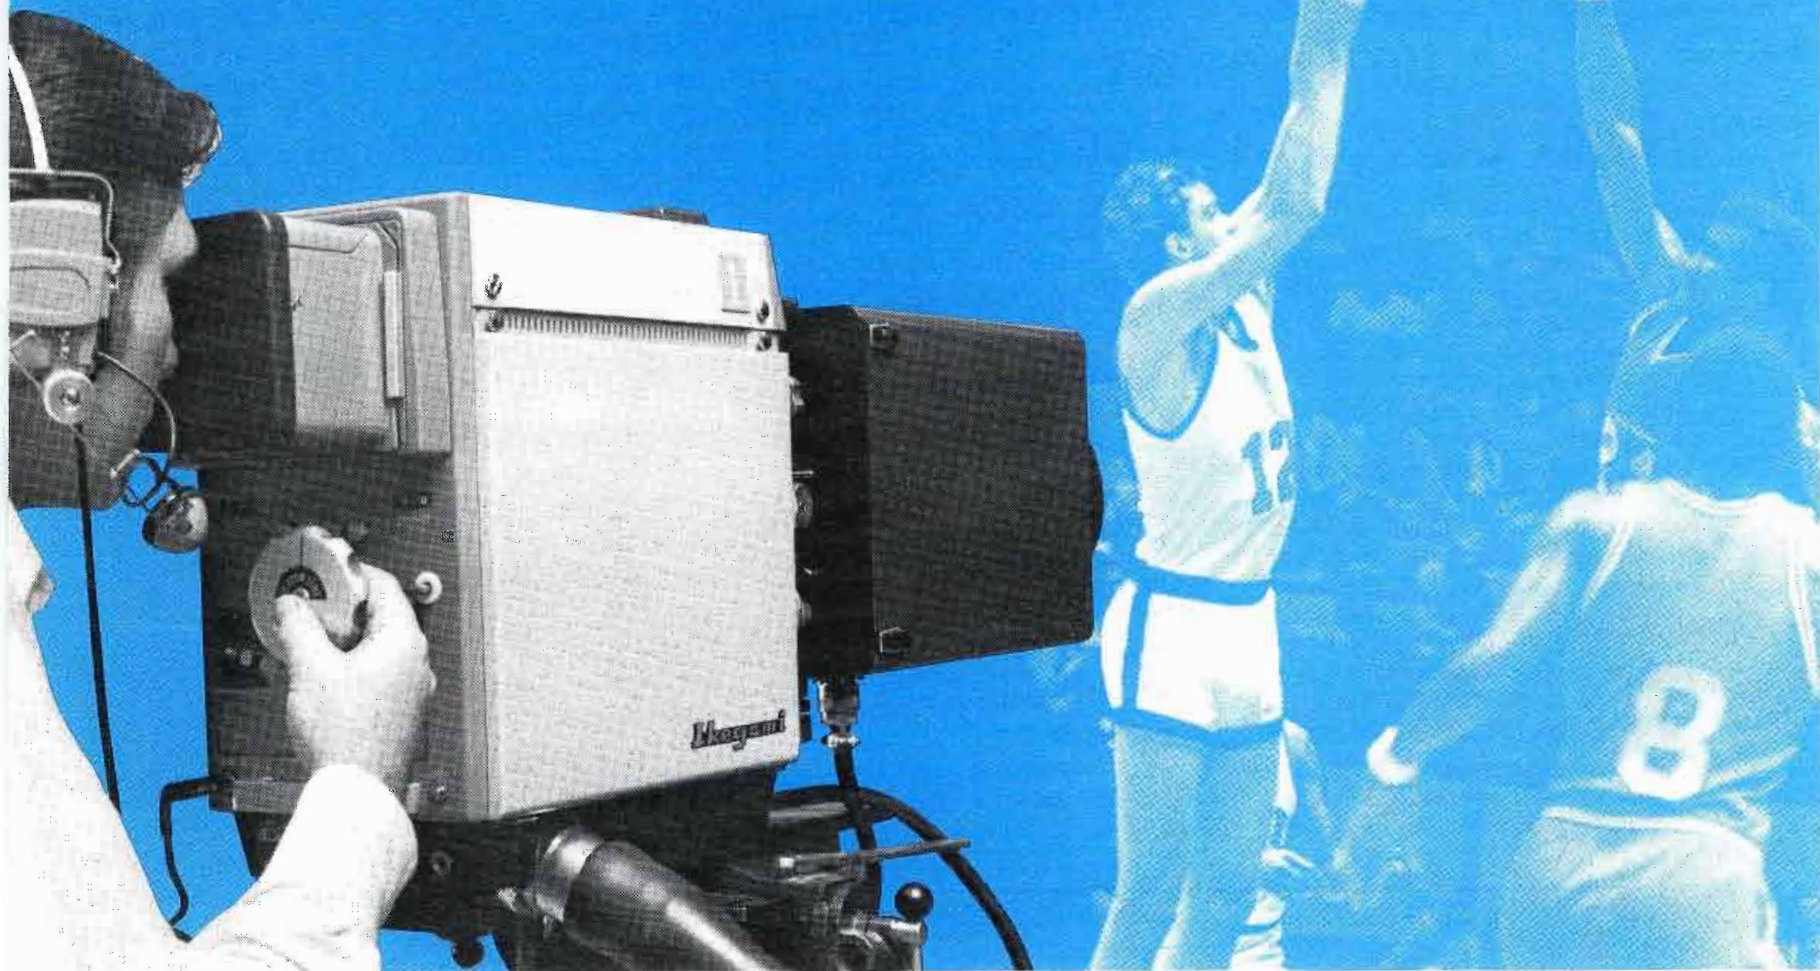

"At under 60 lbs., the TK-355 moves to new camera positions with a quarter the manpower and time of our previous studio-type color cameras. And it's fantastically reliable. Our three Ikegami TK-355's cover all events at the new sports and entertainment center in Northwest Ohio, The Coliseum. With these cameras, it's been zero downtime all the way!

There are plenty of little 'extras' which make the TK-355 a pleasure to use, too. Like velvet-

smooth zooming with unique push-pull control... and the built-in diascope registration chart for instant emergency set-up and alignment.

No other low-cost color camera we've tested is so portable, so reliable, so easy to use, and delivers such great pictures at moderate lighting levels. Ikegami has really put it all together in the TK-355!"

**Len Zaller, Operations Manager
Midwest Teleproductions, Inc.**

For further information and/or demonstration, call or write:

IKEGAMI ELECTRONICS INDUSTRIES INC. OF NEW YORK

35-27 31st Street, Long Island City, New York 11106/Telephone: (212) 932-2577

For More Details Circle (34) on Reply Card

"I jumped from tugboat to television"



after I got my First Class FCC License"

What do you do with your off-duty hours if you work in the engine room of a tugboat? Well, if you're Richard Kihn of Anahuac, Texas, you learn electronics with CIE. As he tells it: "Even before I finished my course, I passed my First Class FCC License exam and landed a job as broadcast engineer with KFDM-TV in Beaumont, Texas. Then in my first year at KFDM, I finished my CIE course, earned two raises and became a "two-car" family! Not bad for an ex-tugboat hand! "I'd recommend Cleveland Institute of Electronics to **anybody** interested in broadcasting."

You **need** an FCC ticket to move ahead in broadcasting, and five out of CIE's seven career courses prepare you to "sit for" the Government FCC Commercial License exam. In a recent survey of 787 CIE graduates, better than 9 out of 10 CIE grads passed the Government FCC License examinations. That's why CIE can offer this famous Money-Back Warranty:

When you complete any CIE licensing course you'll get your FCC License or be entitled to a full refund of all tuition paid. This warranty is valid during the completion time allowed for your course. You get your FCC License... or your money back.

Send coupon below for **FREE** book. For your convenience, we will try to have a representative call. If coupon is missing, write: Cleveland Institute of Electronics, Inc., 1776 E. 17th St., Cleveland, Ohio 44114.

Approved Under G. I. Bill

All CIE career courses are approved for educational benefits under the G.I. Bill. If you are a Veteran or in service now, check box for G.I. Bill information.



MAIL COUPON TODAY FOR FREE BOOK

CIE Cleveland Institute of Electronics, Inc.

1776 East 17th Street, Cleveland, Ohio 44114
Accredited Member National Home Study Council

Please send me your FREE book,
"How To Get A Commercial FCC License."

Name _____
(please print)

Address _____

City _____

State _____ Zip _____ Age _____

Veterans and Servicemen:

☐ Check here for G.I. Bill information.

BE-94

PEOPLE IN THE NEWS

Dennis G. Christensen has been appointed Vice President, Marketing, at Television Research International, Mountain View, Calif. He was previously national sales manager for IVC and Datatron. Also at TRI, **Gary H. Beeson**, formerly regional distributor sales manager at IVC, has been appointed Manager, Marketing, and will be responsible for the company's new helical VTR editing system.

Peter Waldeck has been appointed Vice President as well as a member of the Board of Directors of CPD International, Inc., the newly formed export marketing subsidiary of Cinema Products Corp., Los Angeles....The Lynch Communication Systems Inc. announced the appointment of **Victor Mayer** as Manager, Systems Assembly...**Brian C. Mitchell** has been appointed field service engineer of Conrac video products....Javelin Electronics, Division of Apollo Lasers, Inc., has announced the promotion of **Donald T. Heckel** to Vice President of Marketing....The International Division of Communications Technology Corporation, Los Angeles, has announced the appointment of **James C. Hawley** as Manager for Latin America.

Lykes Electronics Corporation, Tampa, Florida, announced the appointment of **James Starks** as General Manager of the Systems Division, and **Carlo McDaniel** as the new Chief Engineer.

CATV

Carl De Simone has been named outside sales representative in Anixter-Pruzan's Southwest district. De Simone will call on CATV, power utility and telephone accounts in Southern California from the company's district office and warehouse facility in Santa Ana....**Larry G. Morris** has been named director of corporate planning for General Cable Corporation. He replaces **William N. Nuckols**, who has been elected vice president of the corporation and general manager of the Special Products Group....**Carlos Katz** has been named chief research engineer at General Cable's Power and Control Cable Research Center.

Radio/TV

Harold L. Kassens, Assistant Chief of the Commission's Broadcast Bureau, has announced his retirement. Kassens expects to continue his broadcast activity in the Washington, D.C. area as a consulting engineer....**James R. Hobson** special assistant to Chairman **Richard E. Wiley**, has been appointed Chief, Renewal Branch, of the Broadcast Bureau. He replaces **Richard J. Shibben**, recently named Chief of the Renewal and Transfer Division....**James J. Brown**, senior supervisory attorney of the License Renewal Branch, has been appointed assistant chief of the Broadcast Bureau's Renewal and Transfer Division.

NEW PRODUCTS

TBC Systems

Television Microtime, Inc., has announced two new TBC systems, the Series 610 and Series 640.

The new Series 610 is an advanced analog TBC and replaces the separate stand alone units that preceded it. The Series 640 is Microtime's entry into the standalone digital TBC field.

Both of the new systems include a host of features such as built-in sync generators, full proc amps and direct/heterodyne processing. In addition, both the Series 610 and 640 will accept RS-170 or RS-330 composite sync and may be interfaced to H lock, V lock (capstan servo'd) or no lock VTR's.

Because of this breakthrough, Microtime is offering to retrofit its present customers' TBC's to assure them of obtaining full benefit from the advanced design of the newer Microtime systems.

For More Details Circle (68) on Reply Card

Wideband Delay Lines

Walther M. A. Andersen has introduced the Model BID-600 wideband IF delay line available, off the shelf, in binary increments up to a maximum of 8.0 usec and with 250 nsec the least significant bit. Other delay values may be furnished to meet individual requirements.

A low loss wide bandwidth device, the BID-600 is designed specifically to simplify system delay trimming. The line may also be used in other applications requiring distortion-free signal delay at IF.

The Model BID-600 offers center frequency of 60 MHz and 3 dB bandwidth of 30 MHz. Amplitude ripple, across the bandwidth, is ± 0.2 dB maximum. Maximum attenuation is 20 dB. Both input and output VSWR is 1.4:1. Third-Time spurious is -35 dB maximum while other spurious is -45 dB maximum. Delay tolerance, singly, is ± 0.005 usec and in matched sets, ± 0.001 usec.

For More Details Circle (69) on Reply Card

Modular Storage System For Carts


Simpac International, Newport Beach California, has recently intro-

duced its modular storage system for broadcast cartridges. The modules are like building blocks, interlocking in all directions; top, bottom, sides, and back. Several configurations can be

made; such as carousels, or "A" frames. With this capability, carts can be stored in wasted space.

Features of the system include: space saving - you can store 10 carts in an area 5 inches by 10 inches. These modules in most cases, will store carts in 25-50% less space than anything on the market. The parts are light weight and rugged and due to the precision molding, carts suffer no damage as a result of being dropped into slots of existing racks.

If you haven't seriously considered the new Setchell Carlson Dual-10 Monitor,

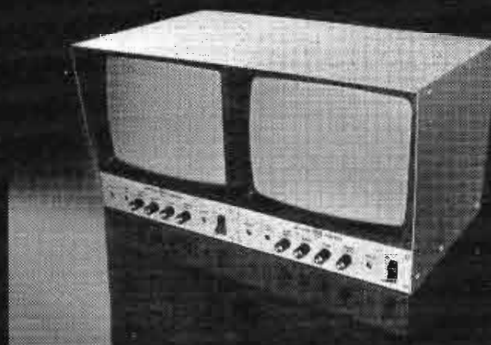

It's time to take a closer look.

At Its Price. At \$465* the Dual-10 is certainly worth taking seriously. In fact, the Dual-10 provides 13% more viewing area per monitor than higher priced Dual-9s.

At Its Modular Construction. The Dual-10 features Setchell Carlson's unique Unit-ized Plug-in Circuit Modules for instant on-the-spot servicing and the elimination of downtimes. It's the next best thing to serviceless operation.


At Its Performance. Horizontal Resolution, 640 lines. Amplifier Bandwidth, 8MHz. And effective shielding to eliminate crosstalk. It's all in the specs. And it all requires only 8¾-inches of vertical rack space. For complete data and/or product demonstration, write to us today.

*Suggested U.S. List

SC ELECTRONICS, INC.
A SUBSIDIARY OF AUDIOTRONICS CORPORATION
530 5th AVE. NW NEW BRIGHTON, MN. 55112 (612) 633-3131

For More Details Circle (36) on Reply Card

Now! Monitor audio channels visually— the easy way

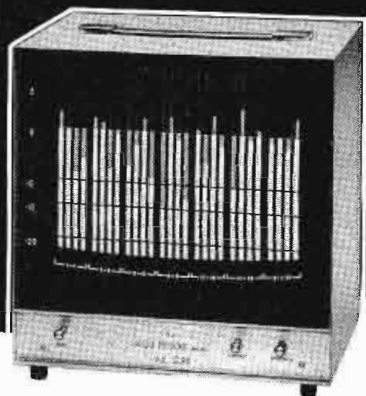

ADM VUE-SCAN Eliminates "head-swiveling"— replaces up to 28 VU meters

You keep your eyes on a single TV-type screen instead of eyeballing a whole string of VU meters. VUE-SCAN displays each analog channel as an easily-read illuminated bar. The bars are always present as a background reference. As the voltage level of a channel increases, the bar representing it increases in height and color intensity. Blue represents a normal operating condition—red immediately signals an overmodulated condition. VUE-SCAN can be used as a self-contained accessory with any Audio Designs or competitive console. Write us for details.



ADM Consoles are built to the most exacting quality standards. Unique plug-in modules provide exceptional flexibility for expansion.

AUDIO DESIGNS AND MANUFACTURING, INC.

16005 Sturgeon, Roseville, Michigan 48066
Phone: (313) 778-8400, Cable: AUDEX

In Canada: TELAK, Scarborough, Ont.
(416) 438-3804

For More Details Circle (37) on Reply Card

NEW PRODUCTS

(Continued)

Modules sell for about half the cost of other racks.

For More Details Circle (70) on Reply Card

Automatic Movie Programmer


Dynasciences Video Products, Blue Bell, PA. has announced the introduction of the MCM-90, Automatic Movie Programmer.

This new addition to the Dynasciences line is a low cost, automatic sequential switcher intended for use with video cassettes for automatic programming of movies and other multi-reel events. The MCM-90 can be used with an external timer to provide programming at scheduled times during the day.

The MCM-90 will be available in two versions: The MCM-90S for use with Sony machines and the MCM-90J for use with JVC cassettes.

For More Details Circle (71) on Reply Card

Monochrome Monitors



- High Resolution — 800 line for bright, crisp detail.
- Exceptionally High Reliability — 100% solid-state modular construction.
- Ease Of Maintenance — All 5 modules easily replaced for rapid service.
- Reduced Spares — All 5 circuit modules common to CRT sizes from 9 to 23 inches.
- Flexible Installation — Available in chassis, cabinet (with optional hangers) and rack mount models.

Call or Write for Brochure

— MODTEC DIVISION —



BROADCAST
ELECTRONICS, INC.
8810 Brookville Road
Silver Spring, Md. 20910
301-588-4983

For More Details Circle (38) on Reply Card

STOP VTR BREAKUP WITH BREAKOUT^{T.M.}

THE AUTOBLACK
DEVICE THAT
SWITCHES VIDEO
TAPE PLAYBACK
ON THE AIR *ONLY*
WHEN THE VTR
HAS STABILIZED.



The VS-21 puts Color-Black on the line until it senses that VTR has achieved playback "lockup" . . . then automatically switches (in the vertical interval) to VTR's output.



Audio Follow included (use it, or not, as desired).



End forever the embarrassing, unprofessional, costly airing of video tapes when VTR's transport hasn't stabilized and settled down.



Easily connects to any quad VTR. No attachment to, nor disruption of, internal video or sync wiring. Your Lockup tallylite triggers the VS-21.



Hang a *BreakOut* on the output of each VTR for low-cost tape playback insurance protection.

**Ultra
Audio
Products**



P.O. Box 921 • Beverly Hills • California
90213 U.S.A. • Telephone (213) 849-1433

ALWAYS THE **U**NIQUE, the
NUSUAL, the
ULTIMATE from



For More Details Circle (67) on Reply Card
BROADCAST ENGINEERING



Jack Hansen, WFMD, Frederick, Md.

Directional Antenna Monitoring Simplified

With the Model AM-19D (210) Digital Antenna Monitor, accuracy is assured and operating cost savings are realized. Now antenna phase angle and loop current ratio readings can be taken by lesser grade operators. The easy-to-read numeric readout provides exact readings and eliminates interpretation errors common with conventional meters. Resolution is 0.1° for phase angle and 0.1% for current ratio.

Contact us now on this and other FCC type approved Antenna Monitors.

POTOMAC INSTRUMENTS
932 PHILADELPHIA AVE.
SILVER SPRING, MARYLAND 20910 (301) 589-3125

For More Details Circle (39) on Reply Card

Tall Structure Beacons

Flash Technology Corporation is introducing its ElectroFlash™ System for radio and TV towers. The FAA approved system utilizes sharp lower cutoff of the optical beam to reduce downward radiation.

Internal louvers are included to provide ground shadowing, if needed. The system also includes two-wire control and monitoring, failure alarm contacts, two beacons driven from one power converter, and extended effective flash duration at night.

For More Details Circle (72) on Reply Card

Electronic Synchronizer

A new electronic synchronizer developed by **Automated Processes, Inc.**, 80 Marcus Drive, Melville, N.Y. 11746, is described by the company as "the lowest-priced and smallest professional-quality synchronizer on the market today". Called the Minimag®, it measures only 19" wide x 1 3/4" high x 12" deep, and sells for under \$2,000.

The Minimag provides all essential functions required for the synchronization of mag tapes. It will interlock any two tape machines, video, multi-channel, sprocketed or unsprocketed audio, and two or more Minimags can

be used to synchronize additional tape machines.

Typical applications for Minimag include: connecting two 16-track audio tape recorders (ATR) to make them function as a single 30-track machine; providing variable or fixed delay effects; keeping an ATR in perfect sync with a VTR for audio "sweetening"; synchronizing for TV and FM stereo simulcasts; recording remote overdub tracks, etc.

The Minimag synchronizer is supplied as a complete unit, with built-in code generator. It has a capture range of ± 50 seconds and will maintain sync, or variable offset for any length of time regardless of tape stretch or shrinkage. If tapes are within 50 seconds of sync, it will adjust motor control voltage automatically until they are in perfect sync, with or without offset.

For More Details Circle (73) on Reply Card

Tape Cart Machines

Broadcast Electronics, Inc. announces the introduction of the new Spotmaster® Series 2000 tape cartridge machines. These machines are of completely new design, and they

Accurate Field Strength Measurements Can Be Easy

With the Model FIM-21, electromagnetic field strengths can be measured to within 2% across the entire 535 to 1605 KHz AM band. And to intensity levels as low as $10 \mu\text{V/m}$. Its integral shielded antenna in the cover, front panel speaker, large illuminated mirrored meter, and ganged oscillator/receiver tuning, make it easy to operate in the field. An optional telescoping stand adds convenience. It's also a versatile instrument — use it as a tuned voltmeter for RF bridge measurements.

Contact us now for complete details on our line of field strength meters.



POTOMAC INSTRUMENTS
932 PHILADELPHIA AVE.
SILVER SPRING, MARYLAND 20910 (301) 589-3125

For More Details Circle (40) on Reply Card

Give us a spin!



Get the feel of the "Velvet Touch" drive system, no-slip starting and super soft suspension of RUSSCO's rugged CUE-MASTER and STUDIO-PRO turntables. With heavy-duty synchronous motors, Olite bronze bearings and only 3 moving parts, you've got long-wear dependability!

RUSSCO
ELECTRONICS INCORPORATED
1070 BROOKHAVEN, CLOVIS, CALIF.
PHONE (209) 299-2167

NEW PRODUCTS

(Continued)

represent a significant advancement in Spotmaster design.

The Series 2000 quality cartridge machines incorporate unique, new features which enhance operation. Simplicity of design permits these machines to be offered at new low prices without sacrificing the quality, performance and durability previously available only in more expensive units.

Series 2000 cartridge machines have low power consumption and run cool to protect tapes. Their noise figure exceeds 57dB, and start/stop times are the fastest in the industry—under 80 milli-seconds. Standard features include balanced transformer output, 1,000 Hz cue, 150 Hz cue and provision for remote control and telephone interface.

Separate front panel plug-in modules are used to implement record and audition functions. These add flexibility and permit instant field conversion of Series 2000 playback machines. Table top units accept A, B and C size cartridges, and the dual rack mount configuration accepts size A and B cartridges.

Broadcast Electronics is offering the new Series 2000 machines with an 18 month warranty.

For More Details Circle (74) on Reply Card

Splice Finder/Bulk Eraser

The Senstrol automatic splice finder and bulk eraser minimizes audio cartridge tape splice search time, saving AM and FM radio stations countless man-hours in cartridge handling. The UMC splice finder features a built-in bulk eraser to further simplify the processing of the thousands of A, B, and C sized cartridges required by most radio stations.

For More Details Circle (75) on Reply Card

Video Compressor

Consolidated Video Systems has introduced a video compressor as an option to its Model 600 digital video synchronizer.

The video compressor is designed to electronically reduce a video picture to one-fourth its original size both horizontally and vertically. Designated Model 600-2, the video compressor is believed to be the first

Digital Tape Timer



- Fits ALL 2" machines
- Optional remote display
- Power Supply included
- Field proven for more than 2 years
- The ORIGINAL exact-replacement timer; installs with one nut
- THE SAME LOW PRICE \$595.

OTHER VAMCO PRODUCTS

- Chroma key input switchers \$595
- Composite chroma key kit \$395
- Digital program Clock/Timers \$195
 - Routing switchers
 - 1 in 12 out Video DA
 - 1 in 20 out Audio DA
 - Color Monitors/Receivers



**VAMCO
ENGINEERING**

Box 7512
Tulsa, Oklahoma 74105
(918) 252-4142, 747-0421

leadership through creativity in design

For More Details Circle (65) on Reply Card

Spotmaster®



200 SERIES MONO CONSOLES

- 5 or 8 mixers, Daven type step attenuators
- Cart (high) and mike (low) level inputs switch selectable
- Usable in remote control applications
- Full dual channel metering, identical program and audition transformer outputs
- Internal cue, phone and 10 watt monitor amps
- Excellent electrical specs

FULL LINE INCLUDING 12
OTHER MODELS AVAILABLE
CALL OR WRITE



BROADCAST ELECTRONICS
8810 Brookville Road
Silver Spring, Maryland 20910
Phone: 301-588-4993

For More Details Circle (42) on Reply Card

commercially available device which compresses a video picture and meets broadcast standards. The effect of the television compression is similar to a half-size photo in optical terms. Once the signal is compressed, the operator has a choice of positioning the reduced picture in any of six locations on the CRT.

"The significance of this product to broadcasters is vast" says Daniel J. Yomine, CVS President. "Until the announcement of the video compressor, the only way to accomplish the same thing has been either to use film or a 'Rube Goldberg' method of shooting a TV monitor with a live camera. In television news, sports, and special events coverage there has always been a need for video compression. It is one more television production technique which was previously only practical through the use of film."

For More Details Circle (76) on Reply Card

Back-Pack Color TV Camera

A new back-pack color TV camera offering production quality performance was introduced by CEI of Mountain View, California.

Designated the CEI-290, the camera is ideal for mobile video taping and live TV broadcast production applications. The system includes four discrete units: (1) camera head with standard 10:1 Angenieux f2.8 lens; (2) back-pack electronics; (3) detachable view finder and Bell hip-pack mounting adapters; and (4) camera control unit with NTSC encoder and operating control panel. For greater economy and flexibility, the control unit is interchangeable with the CEI-280 broadcast studio camera.

The CEI-290 back-pack system weighs only 40 pounds. It will operate up to 600 feet from the control unit. The camera head can be operated up to 30 feet from the back-pack electronics unit. For studio use, it has a tripod mounting and quick-connect 7" view finder. The system is priced from \$43,000 and includes the only 2-year warranty in the industry.

In addition to TV broadcast cameras, CEI offers a line of TV camera systems for medical and industrial applications. All CEI equipment is designed and manufactured in the U.S.A.

For More Details Circle (77) on Reply Card

Delay/Echo Unit

Revox is now offering a delay/echo unit that incorporates an endless loop

cassette that can be used with any A77 recorder by removing the deck plate and reel turntables and attaching the cassette mounting plate. The changeover takes less than 10 minutes.

Applications include: automatic message repeating; continuous short-term program monitoring; time delay for tape echo or control of programmable machinery. For the last application, the variable speed control unit may be used to extend the range of available time delays.

For More Details Circle (78) on Reply Card

Video Delay Module

Andersen Laboratories, Inc., has developed a high-performance, compact 1H unity gain video delay module for applications in drop-out compensators, vertical aperture correctors, comb filters, and video disc systems.

The 1H Video Delay Module contains the drive and recovery circuitry necessary to pass base-band NTSC or PAL video with outstanding fidelity. The actual delay is achieved in an ultrasonic glass delay line at RF frequency.

Reel-to-reel... for real



Exciting things are happening in the reel-to-reel market. And it's all caused by a new machine called the ITC 850 Series. Here is the result of a long series of consultations with broadcasters to determine what they most desired in a reel-to-reel machine. Then we added a few innovations of our own. Truly, the 850 Series is equipment designed specifically with the professional broadcaster in mind. Some 850 features: motion sensing, multi-function edit mode, super quiet operation, automatic tape lifters, TTL logic circuitry, capability of handling dissimilar size reels... and more too numerous to mention here. If you're in the market for something new and vastly improved in reel-to-reel, a **collect** call to us will reveal an interesting story that you may have been waiting to hear. Make the real move to reel-to-reel...ITC. Collect number 309-828-1381.



INTERNATIONAL TAPETRONICS CORPORATION


2425 South Main Street • Bloomington, Illinois 61701

Marketed exclusively in Canada by McCurdy Radio Industries Ltd., Toronto

For More Details Circle (43) on Reply Card

SPORTSCASTERS —

ISN'T IT TIME YOU GAVE YOURSELF A HELPING HAND ???

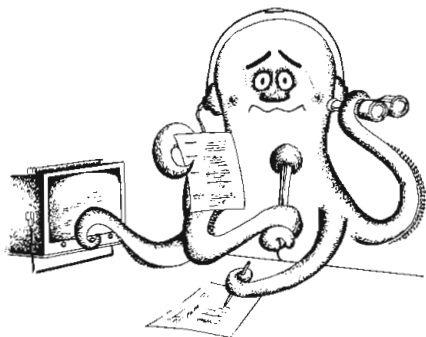

Hands-free communication is within your reach. Television Equipment's well-proven Sportscaster headset, with integral dynamic boom mike, gives you complete freedom of movement — just right for those tense moments when you need to consult your references.

The headset has a . . .



Price: \$ 75.00
Delivery from stock

Dynamic Boom Microphone; 400 OHMs, frequency range 50-15,000 Hz, sensitivity 2mV (loaded) for close speech.

Double Headphones: independently wired, 200 OHMs each, frequency range 50-15,000 Hz.

Ventilated foam cushions eliminate perspiration and let you hear ambient sound (optional ear-enveloping cushions).

Weight: 6½ oz. Practically unbreakable components. Optional cough switch.

For your helping hand phone today. . .

In Canada call:

Conway Electronics Enterprises, Ltd.
416 • 742-0063

See us at
NAB Booth #710
South Hall

Television Equipment Associates, Inc.

BILL PEGLER 516 • 628 - 8068

Box 1391 • BAYVILLE, N.Y. 11709

For More Details Circle (64) on Reply Card

**ask about our new
am | fm | tv monitors**



Call or Write ARNO MEYER

BELAR ELECTRONICS LABORATORY, INC.

Lancaster Avenue at Dorset, Devon, Pa. 19333 Box 827
(215) 687-5550

For More Details Circle (61) on Reply Card

SHINTRON

MODEL 314 AUDIO DISTRIBUTION AMPLIFIER

OUR D.A.'s ARE TOUGH

SHINTRON

MODEL 315 AUDIO DISTRIBUTION AMPLIFIER

SHINTRON

MODEL 316 PULSE DISTRIBUTION AMPLIFIER (OUR SECTION)

SHINTRON

MODEL 317 VIDEO DISTRIBUTION AMPLIFIER

SPECIAL EFFECTS GENERATORS, MONITORS,
SYNC GENERATORS, CONSOLES, MIC MIXERS.

SHINTRON

144 ROGERS ST. CAMBRIDGE, MA 02142 U.S.A.

TELEPHONE (617) 491-8700

For More Details Circle (44) on Reply Card

NEW PRODUCTS

(Continued)

The unit is also available in ½ H configurations.

In quantities of 100, the module is offered at a unit price of less than \$250. Delivery is 90 to 120 days ARO.

For More Details Circle (79) on Reply Card

MCR Microwave Repeater System

The MCR-11 from **Communications Carriers** is an all solid state RF heterodyne microwave repeater system for long haul transmission in the 10.7 GHz through 15 GHz frequency bands.

The MCR system offers several advantages over standard microwave equipment. It is self redundant or fail safe. (The system can tolerate component failures and still maintain service without switching to stand by equipment. Because of this feature, the MTBF of the MCR-11 is an order of magnitude greater than typical IF heterodyne equipment.) The repeater is nearly distortion free due to the near perfect transmission properties of RF amplifiers. The parts count is ⅓ that of an IF heterodyne system. Instantaneous RF bandwidths are available from 25 MHz up to 250 MHz; output power up to 1 Watt; noise figure 6 dB; frequency stability .001%; fade margins up to 50 dB; power consumption 70 Watts.

The MCR-11 will meet signal-to-system noise transmission standards consistent with 1 picowatt per mile. Both indoor and outdoor packaging is available. The MCR repeater system can be used for single and multiple TV signal transmission, 1800 voice circuit F.D.M. or 40 megabit quadrature phase PCM.

The MCR system has been in field trials for 1.5 years at the F.A.A. and is now F.C.C. type approved.

For More Details Circle (80) on Reply Card

Flutter Meter

An inexpensive audio flutter meter that complies with the IEEE and DIN recommended standards is now available from **3M Company's Mincom Division**.

Designed to sell for under \$400, the Model 8160 is the third in the 3M Brand Industrial Instrumentation line of audio flutter meters.

For More Details Circle (81) on Reply Card

BROADCAST ENGINEERING

Digital Air Temperature

The Announcer's Friend




- ☒ Indoor and Outdoor Sensors
- ☒ Walnut-Finish Console
- ☒ Gold Anodized Panel
- ☒ Multi-Sensor Selector
- ☒ Remote to Any Distance
- ☒ 1/2" Sperry 7-Segment Display
- ☒ Slaves Available

Send for Spec. Sheet, Model 309.
Money Back Guarantee.

Also, a complete line of Weather
Instruments, Recorders and Controllers.

Texas Electronics, Inc.
(214) 631-2490
P. O. Box 7225B
Dallas, Texas 75209



For More Details Circle (48) on Reply Card

(Continued from page 16)

Lucas demonstrated applications of the Tektronix 1480 oscilloscope, the 7L13 Spectrum Analyzer, and the Tektronix color video monitor and color corser.

Chapter 26: Chicago, Ill. Chairman: Brad Anderson Chicago, Ill. 60680


New chapter officers elected at the November 19th meeting are: Chairman, Bob Churchill; Vice Chairman, Craig McCartney; Secretary-Treasurer, Jim Grinnell; Past President and Chairman of Convention Planning, Brad Anderson; Program Chairman, Ken Steininger.

The scheduled program was cancelled at the last minute, thus providing the opportunity to exchange information concerning the move of some of the stations to the Sears Tower and the circular polarizations tests being conducted by WLS-TV. Descriptions of the equipment being used by WLS-TV, WTTW-TV, WFYR-FM, WCLR-FM, WLAK-FM, and the problems they have encountered were presented by Larry Ocker, Pat Alvarez, Warren Schulz, and Jim Grinnell. A movie showed some of the construction in progress. Tours were provided through the transmitter

(Continued on page 57)

The No.1 number for tape cartridge equipment

309-828-1381

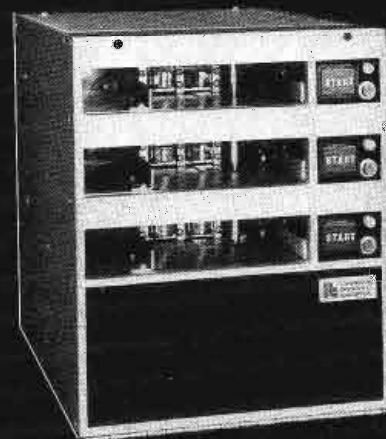

3D SERIES REPRODUCER

A collect call to the above number will bring you all the facts you need to know about tape cartridge equipment. One call will establish a working relationship between you and our broadcast oriented people...a relationship that delivers dependable performance at a truly competitive price. The relationship will last as long as you use ITC equipment...in the selection of equipment, proper servicing, and adaptation of machines to your broadcast requirements. If you're thinking tape cartridge equipment, find out why hundreds of stations depend on ITC.

WRA SERIES RECORDING AMPLIFIER



**Call collect for
details on ITC's
equipment and
leasing plan**

**it INTERNATIONAL
TAPETRONICS
CORPORATION**

2425 South Main Street,
Bloomington, Illinois 61701

KPRC—WSM (OPRYLAND)—WWL—KTV—WDAI—WCAU


With Users Like These Can There Be Any Doubt?



You can be sure that no other unit will give you all the features you will find in the Bethany Audio Distribution Amplifier! Check these for a few:

- 18 outputs with 80 db isolation
- Transformer input
- Two year warranty
- 20-20 KHZ-.5db (max) response
- .1% overall distortion
- Input and output VU metering

All this and more for a low \$295.00 gives you the finest performance and versatility available anywhere. For more details, call us collect (713) 783-1260, or talk to our representatives*



**BETHANY
INTERNATIONAL, INC.**
5750 Bintliff, Suite 201
Houston, Texas 77036

THE HOLT CORP. OF PENN., INC. BETHLEHEM, PENN.
KLOPF AUDIO/VIDEO COMPANY DAYTON, OHIO
OPTIMEDIA SYSTEMS, INC. CLIFTON, NEW JERSEY

*We are interested in representatives in other areas.

For More Details Circle (49) on Reply Card

For More Details Circle (47) on Reply Card

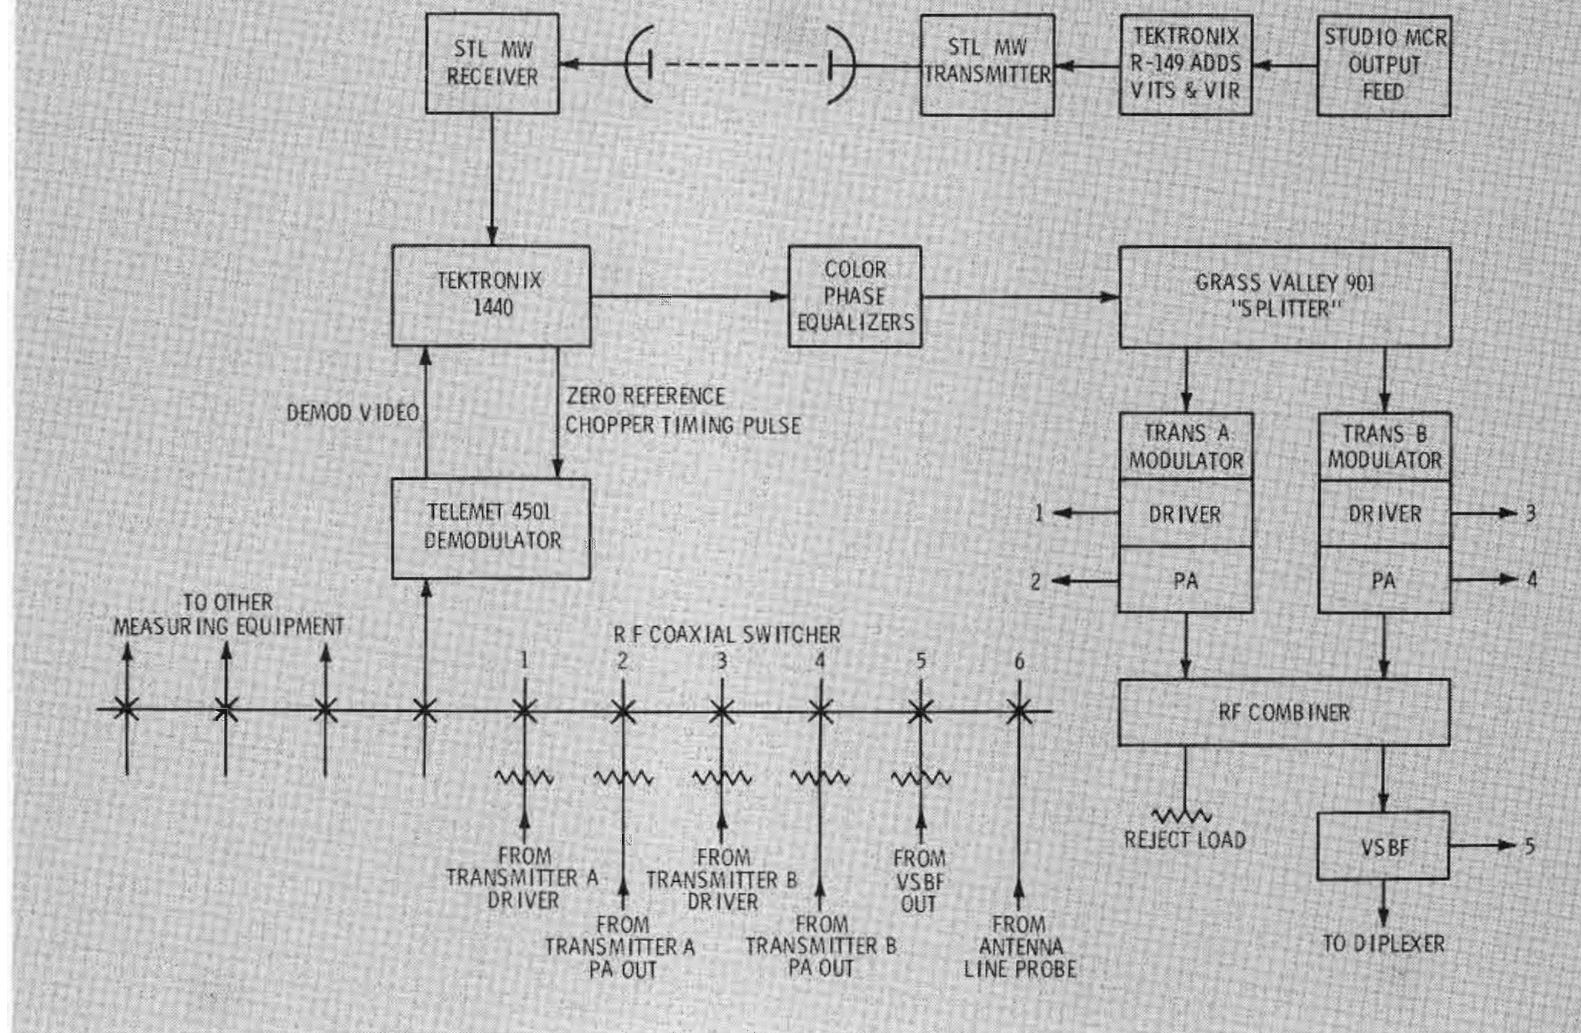


Fig. 3 The KATU system of RF feed points.

(Continued from page 24)

Band pass is probably the most important. As mentioned previously, the 1440 will "baby" soft tubes as discussed under its "tube checker" function.

Only one RF coax feed line from the directional coupler at the output of the Vestigial Sideband Filter is necessary to make the 1440 perform excellently. But is it a flat line? To make sure, you might feed it into your station sweeper, (ours is an RCA BW-5) and note your waveform, perhaps take a Polaroid photo of same. Then add a quarter wavelength line to the end of the feed line and sweep the system again. Now compare the two sweeps. If they are reasonably close in appearance, your line is probably flat.

Having made sure the sampling line from the directional coupler is flat, then the demodulator should be adjusted according to the manufacturer's instruction book so that it is neither under-driven nor over-driven by the sample. This problem was solved long before the advent of the 1440 when we purchased the Telemet 4501 Demodulator. The

AGC on this device allows us to go to quarter power and less without disturbing the quality of the recovered RF signal from the demodulator. The Telemet 4501 performs very satisfactorily and a second one is used at the studio remote control operating console.


Whichever type of demodulator is employed, a simple field change is required to allow the 1440 to "time" the chopper pulse generated by the demodulator. In the case of the 4501, a BNC fitting and a small piece of coax was all that was required. The manufacturer of your demodulator will supply you with the needed information. More recent serial numbers of some demodulators, including Telemet, have the change built into them to accommodate the 1440.

We wish to thank those who have cooperated with time and information toward this article. Mr. William Vandermay, Chief Engineer of KATU has spurred us on with both encouragement and cooperation. Mr. C. J. Benninger, night Transmitter Maintenance Engineer, has patiently borne our

plea for special tests and check-outs. Other members of our staff and community have shown lively interest in our efforts and our thanks goes to them for their cooperation and assistance in making this project possible.

Bibliography

1. Eric M. Leyton, **Exploratory Field Testing of the BTS Color Reference Signal for TV.**
2. Harry Etkin, **Broadcast Engineering Magazine**, "Network VIR Signals Provide Critical Tests," January, 1971, BE.
3. T. M. Gluyas, **RCA Broadcast Systems**, "TV Transmitting Systems For Unattended Operation," (for presentation at the 28th NAB Conference, March 17-20, 1974), Camden, New Jersey.
4. Tektronix Application Notes No. 8a.

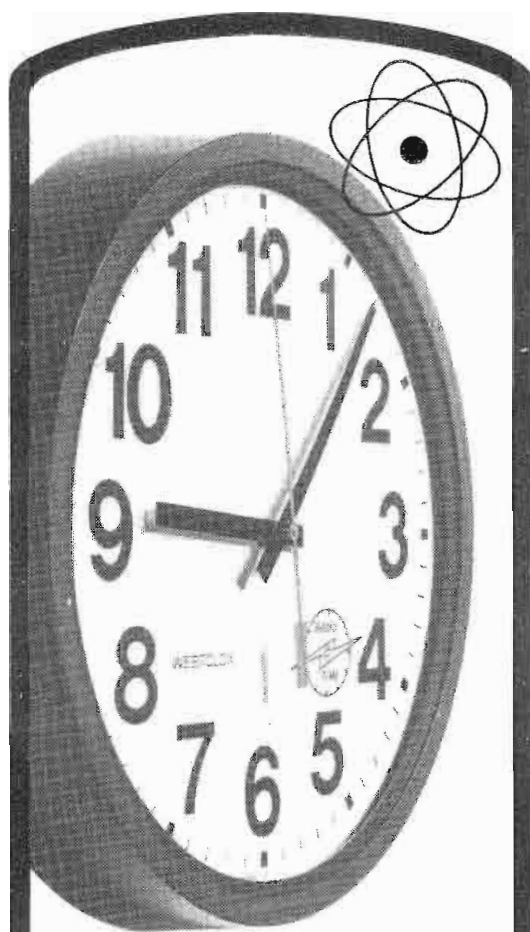

ULTIMATE ACCURACY!


Radio-Controlled Quartz Crystal Movement

This amazing timepiece solves the problem of *absolute accuracy* that is so necessary in the modern communication industry.

Each clock contains a solid state radio receiver that is constantly tuned to the National Bureau of Standards' station WWV. Periodically the clock hears a signal that triggers the up-dating mechanism, correcting any minor deviation of the second hand. The clock is also equipped with battery stand-by power. Line power surges, brown-outs, and power failures have no effect on the clock.

Available now for **\$187.50.***

White or black dial



*Volume discounts for multiple orders

**RADIO
TIME SERVICE
INCORPORATED**

P.O. Box 6613
Tucson, Arizona 85733
(602) 793-8174

(Continued from page 55)

rooms and through the Sears closed circuit studios. Larry Ocker, Chief Engineer of WTTW hosted the meeting which was also made possible by Bruce Wallace and the Sears A/V Department.

Chapter 28: Milwaukee, Wisc. Chairman: Ed Wille Milwaukee, Wisc.


Members and guests met on December 10th at the Oak Creek Power Plant to hear Armand Trinitapoli, Lynn Kaiser, and Larry Calvin, present the program "WATTS UP" which included a tour of the Oak Creek Power Plant of Wisconsin Electric. A number of members and guests met prior to the tour at Donny's for dinner.

Chapter 32: Southern Ariz. Chairman: Hobart J. (Bart) Paine Tucson, Ariz. 85717

The December Christmas party was reported in the preceding issue. The January meeting was scheduled to feature Richard N. Lawrence of Telemet for a program on the new 3706 Sideband Analyzer and related transmitter tests.

QUALITY TALKS FOR WENE

Endicott, New York

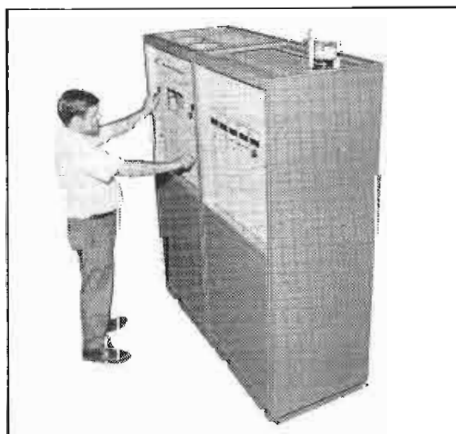

Continental's new 5/10 kW AM transmitter is setting records for acceptance. It has performance and efficiency, with the cleanest sound around. Listen to Continental: quality talks.

**Continental
Electronics**

CONTINENTAL ELECTRONICS MFG. CO.
BOX 17040 DALLAS, TEXAS 75217

For More Details Circle (85) on Reply Card

PHILLYSTRAN^{T.M.}

**100,000 V.
per ft.
withstand
plus the
strength
of steel**

Phillystran, the proven impregnated aramid fiber, will change your thinking about antenna guys.

Excellent weathering resistance, creep rate less than 0.1% per year. Flexibility equal to synthetic cables — excellent dynamic properties. Phillystran cable of the same diameter and break strength is 1/5 the weight of steel cable. Terminations — no problem. Phillystran is now being used successfully with potted and mechanical end fittings.

AVAILABLE FROM STOCK: diameters from 5/64 to 9/16 inches in most commonly used steel cable constructions. Custom cables including electromechanical on request.

PROMPT RESPONSE TO
REQUESTS FOR
ENGINEERING DATA.


**Philadelphia
Resins**

PHILADELPHIA RESINS CORPORATION
20 Commerce Drive, Montgomeryville, Pa. 18936
Phone: (215) 855-8450 • Telex: 846-342

For More Details Circle (66) on Reply Card

SPACE SAVERS FOR YOUR CROWDED STUDIO

- Same built-in performance and reliability as our famous single units.
- 3, 5 or 15 deck units, cabinet or rack mount.
- Mono and stereo with record, switcher, electronic cross fading, sequencer, and remote control options.
- May be incorporated into programmed automation systems.



Spotmaster®
ALSO
SINGLE DECK
CARTRIDGE
MACHINES AND AUDIO
CONSOLES



BROADCAST ELECTRONICS
8810 Brookville Road
Silver Spring, Maryland 20910
Phone: 301-588-4983

For More Details Circle (50) on Reply Card

Jiner COMMUNICATIONS SERVICE, INC.

JAMES TINER, Pres.

COMPLETE TOWER AND ANTENNA SERVICE
AND INSTALLATION

Home Office: Box 232 Ankeny, Iowa 50021 (515) 964-2384
Branch Office: St. Louis, Missouri (314) 727-7228

"We Specialize In Towers"

For More Details Circle (51) on Reply Card

FREE CATALOG & AUDIO APPLICATIONS



CONSOLES
KITS & WIRED
AMPLIFIERS
MIC, EQ, ACN,
LINE, TAPE, DISC,
POWER
OSCILLATORS
AUDIO
TAPE BIAS
POWER SUPPLIES

OPAMP LABS, INC.
1033 N. SYCAMORE AVE.
LOS ANGELES, CALIF. 90038
(213) 934-3566

For More Details Circle (52) on Reply Card

FREE CATALOG

HARD-TO-FIND PRECISION TOOLS

Lists more than 2000 items—pliers, tweezers, wire strippers, vacuum systems, relay tools, optical equipment, tool kits and cases. Also includes ten pages of useful "Tool Tips" to aid in tool selection.



JENSEN TOOLS
4117 N. 44th Street, Phoenix, Ariz. 85018

For More Details Circle (53) on Reply Card

advertisers' index

Akai America	15	Nurad, Inc.	12
American Data Corporation	7	Opamp Labs, Inc.	58
Ampro Corporation	31	Philadelphia Resins Corporation	57
Andrew Corporation	9	Potomac Instruments, Inc.	51
Anixter-Mark	39	Quick-Set, Inc.	CE-2
Audio Designs	50	RCA Global Communications	1
Belar Electronic Laboratory, Inc.	54	Radio Time Service	57
Bethany International	55	Ramko Research	Cover 3
Broadcast Electronics	50, 52, 58	Recortec, Inc.	31
Broadcast Engineering's Proof of Performance Package	37	Revox Corporation	16
CBS Laboratories	45	Russco Electronics	52
Canon, U.S.A., Inc.	16	S C Electronics	49
Capitol Magnetic Products	17	Schafer Electronics	10
Cleveland Institute of Electronics ...	48	Shintron Company, Inc.	54
Communication Technology	8	Shure Brothers, Inc.	Cover 4
Continental Electronics	57	Sony Corporation	21
Cooke Engineering	43	Sparta Electronic Corporation	5
Datatron, Inc.	25	Spotmaster	52, 58
Dynair Electronics, Inc.	Cover 2	Television Equipment Associates	38, 54
Edutron, Inc.	60	Texas Electronics, Inc.	55
Fidelipac	41	Time & Frequency Technology	14
Grass Valley Group, Inc.	3	Tiner Communications Service, Inc.	58
Ikegami Electronics Industries, Inc. of New York	47	Tracor Industrial Instruments	38
International Tapetronics Corp.	53, 55	Ultra Audio Products	50
Jampro Antenna Co.	35	United Systems Corporation, a subsidiary of Monsanto	34
Jensen Tools and Alloys	58	United Recording Electronics, Inc. ...	29
Magnasync/Moviola Corp.	23	Vamco Engineering	52
Minneapolis Magnetics, Inc.	39	Varian-Eimac	13
Modtec Division-Broadcast Electronics	50	Video Aids Corp. of Colorado	CE-3
Nasco Television Systems	CE-4	Vital Industries	11
		Wilkinson Electronics, Inc.	20

BROADCAST engineering®

Regional advertising
sales offices

Kansas City, Missouri

Dennis Triola, 1014 Wyandotte St., Kansas City,
Mo. 64105, (913) 888-4664

Indianapolis, Indiana

Roy Henry, 2469 E. 98th St., Indianapolis, Ind.
46280, (317) 846-7026

New York, New York

Stan Osborn, 60 E. 42nd St., Room 1227, New
York, N.Y. 10017, (212) 687-7240

Mountain View, California

Michael Kreiter, 2680 Bayshore Frontage Rd.,
Room 102, Mountain View, Cal. 94043, (415)
961-0378

London W.C.2, England

John Ashcraft & Co., 12 Bear St., Leicester
Square, Tele: 930-0525

Amsterdam C. Holland

John Ashcraft & Co., W. J. M. Sanders, Mgr., for
Benelux & Germany, Herengracht 365, Tele:
020-240908

Tokyo, Japan

International Media Representatives, Ltd., Shiba-
Kotohiracho, Minato-ku, Tele: 502-0656

PROFESSIONAL SERVICES

Midwest Engineering Associates Consulting Engineers

F. W. Hannel, P.E.
BSEE; MSEE

7304 N. Oxford, Peoria, Illinois 61614
(309) 691-3426

VIR JAMES

CONSULTING RADIO ENGINEERS
Applications and Field Engineering
Computerized Frequency Surveys
345 Colorado Blvd.

Phone: (Area Code 303) 333-5562

DENVER, COLORADO 80206
Member AFCCE

RALPH E. EVANS ASSOCIATES

Consulting Telecommunications Engineers
AM-FM-TV-CATV-ITFS
3500 North Sherman Boulevard

MILWAUKEE, WISCONSIN 53216

PHONE: (414) 442-4210 Member AFCCE

SMITH and POWSTENKO

Broadcasting and Telecommunications
Consultants

2000 N Street, N. W.
Washington, D. C. 20036
(202) 293-7742

Joseph & Donna ROIZEN VIDEO CONSULTANTS

International TV Systems
Marketing/Technical Writing
1429 San Marcos Circle
Mountain View, CA 94043
(415) 326-6103/967-1263

Applied Video Electronics, Inc.

STUDIO SYSTEMS DESIGN AND INSTALLATION
ENGINEERING. REFURBISHING/
MODIFYING COLOR CAMERAS AND
QUADRUPLIX VIDEO TAPE RECORDERS.

Post Office Box 25
Brunswick, Ohio 44212
Phone [216] 225-4443

ROSNER TELEVISION SYSTEMS

CONSULTING & ENGINEERING

250 West 57th Street
New York, New York 10019
(212) 246-3967

A. F. ASSOCIATES, INC.

Consulting and Engineering
for

TV-CATV-AM-FM

Specialists in systems designs and quadruplex video tape recorders.

415 Stevens Ave., Ridgewood, N.J. 07450
(201) 447-0096

W. H. BRADLEY, P.E.

Consulting Radio Engineer
Engineering Applications
& Field Engineering

Phone: 918-245-5444

300 West 41 Street,
SAND SPRINGS, OKLAHOMA, 74063

CLASSIFIED

Advertising rates in Classified Section are 15¢ per word, each insertion, and must be accompanied by cash to insure publication.

Each initial or abbreviation counts a full word. Upper case words, 30¢ each.

Minimum classified charge, \$2.00.

For ads on which replies are sent to us for forwarding, there is an additional charge of \$2.00 per insertion, to cover department number, etc., which is printed in advertising copy, and processing of replies.

Classified columns are not open to advertising of any products regularly produced by manufacturers unless used and no longer owned by the manufacturer or a distributor.

WANTED

WANTED: All surplus broadcast equipment especially clean A.M. & F.M. transmitters, capacitors, capacitors. Surplus Equipment Sales. Clark & Potomac Phase monitors. 2 Thorncliffe Pk. Dr. Unit 28 Toronto 17, Ont; Canada 1-73-tf

WANTED: Educational Public Broadcast station needs surplus broadcast equipment, 10 watt or 1 kw FM transmitter, plus any studio equipment. Tax exempt status. Contact Community Radio Project, 885 Arapahoe, Boulder, Colorado 80302. 12-74-3t

WE ARE LOOKING for new, unused 55875 and XQ-1070 type tubes. Also transmitting and other tube types. Call collect or write: Temtron Electronics, 138-69 Francis Lewis Boulevard, Rosedale, New York 11422. Tel: 212-978-5896. 2-75-1t

NON-PROFIT CHRISTIAN Video Ministry desires used video equipment, studio and remote, accepted as a write-off from commercial stations. Color cameras, switching systems, effects generator, etc., needed. Contact: Maranatha Ministries, PO Box 93, Mentor, Ohio 44060 2-75-1t

BROADCAST AND RECORDING equipment for evangelical Christian non-profit organization. Audio Dept., Open Door Ministries, Box 867, North Adams, Ma. 01247 2-75-1t

6181 TUBES, new or used. Color Camera, any make. Box 609, Altoona, PA. 16603 814-943-2607 2-75-2t

WANTED: your surplus stage-studio and projection lamps. SITLER'S ELECTRIC SUPPLY, INC., P O Box 10, Washington, Iowa 52353 1-75-3t

EQUIPMENT FOR SALE

MOTORS FOR SPOTMASTERS

NEW Paps hysteresis synchronous motor HS2 20.50-4-470D as used in series 400 and 500 machines. Price \$49.00 each prepaid, while they last. 90 day warranty. Terms check with order only, no COD's. Not recommended for Tapecaster series 600 or 700.

TAPECASTER TCM, INC., Box 662
Rockville, Maryland 20851

1-72-tf

MICA AND VACUUM transmitting capacitors. Large stock; immediate delivery. Price lists on request. SURCOM ASSOCIATES, 1147 Venice Blvd., Los Angeles, Cal. 90015 (213) 382-6985. 6-74-12t

STODDART NM-30A radio interference-field intensity meter. 20-400mhz. Like new condition—1966 manufacture. Complete with AC PS, dipole antennas, cables, tripod, & inst. book. Calibrated prior to shipment—\$1,595. **SINGER EMA—910** radio interference-field intensity meter. 1-10GHZ. Like new condition—\$9,250. Surcom Associates (213) 382-6985. 9-74-6t

ONE STOP FOR ALL YOUR PROFESSIONAL AUDIO REQUIREMENTS. Bottom line oriented. F.T.C. Brewer Company, P.O. Box 8057, Pensacola, Florida 32505. 7-71-tf

EQUIPMENT FOR SALE (CONT.)

MAGNECORD-VIKING-TELEX PARTS: Largest stock in the country. Factory prices. Try us for hard to find items. Dept. E, DUNN INDUSTRIES, 12157 Valliant Drive, San Antonio, TX 78216, (512) 349-2953. 12-74-6t

EXCESS INVENTORY - BRAND NEW TUBES - 4CX1000A's, 4-125A's, 4-400A's, 4CX250B's, 4CX5000A's, 805's, 815's, 6B4G's, 6161, 6942, 7007/6166A's; MANY OTHER TYPES at whole-sale prices. Rebuilt 17ENP22 and other scope tubes; PE-250 camera chain available; a complete inventory of transistors, diodes, I.C.'s, solid state rectifier replacements. Write for free catalogue. TEMTROM ELECTRONICS, 138-91 Francis Lewis Blvd., Rosedale, NEW York 11422. Tel: (212) 978-5896. 12-74-4t

LARGE QUANTITY USED RECORDING TAPE. 2500' mylar on 10 1/2" NAB reel. \$1.25/reel. WMDR, Box 461, Moline, Ill. 61265. 1-75-3t

HELIAX-STYROFLEX. Large stock — bargain prices—tested and certified. Write for price and stock lists. Sierra Western Electric, Box 23872, Oakland, Calif. 94623. Telephone (415) 832-3527. 1-75-tf

NATIONAL TAPE CARTRIDGE SERVICE SPECIAL Pressure Sensitive Labels. Fits All Cartridges. Comes in 5 Colors. Write for FREE Sample. MASTERTONE COMPANY, 1105 Maple West Des Moines, Iowa 50265, 515-274-2551 8-73-tf

NATIONAL TAPE CARTRIDGE SERVICE CARTRIDGES RECONDITIONED - NEW TAPE 12 Years Experienced Personnel. Write for new and reconditioned price sheet. Mastertone Co., 1105 Maple, Dept. B-E 1, West Des Moines, Iowa, 515-274-2551 8-73-tf

REBUILT CARTRIDGE TAPE EQUIPMENT. Spotlessly clean and thoroughly tested. 30 day moneyback guarantee, ONE YEAR warranty. Also, **REPAIR AND RECONDITIONING SERVICES** for cartridge equipment by factory trained technicians. Send for complete information: AUTODYNE, Box 1004, Rockville, Md. 20850, (301) 762-7626. 1-75-tf

BUILD YOUR OWN TV AND RADIO PRODUCTION EQUIPMENT. Easy, inexpensive, (mostly IC). Plans or kits: Special Effects Generator, Automatic Logger, Vertical Interval Video Switcher, Solid State Lighting Board, Preset Audio-Video Board, Preset Lighting Board, Crystal Controlled Wireless Mikes with Matching receivers. Subsonic Tone Control for audio tapes, 8MM SOF Cameras and Projectors, Distribution Amplifiers (Sync. Video, Audio), Audio Control Boards (Studio & Remote) Proc-Amp with compensation and regeneration for adapting Helical Scan VTR's to broadcast standards. PLUS specialized correspondence courses in Telephone Engineering (\$39.50), and Integrated Circuit Engineering (\$49.50). Plans from \$5.95 to \$15. SUPER CATALOG plus years updating of new devices Air Mailed \$1.00. Don Britton Enterprises PO Drawer G, Waikiki, Ha. 96815. 5-74-24t

STODDART RADIO interference-field intensity meters. Stoddart NM-22A, 150KHZ-32MHZ. Complete - \$2,195, less antennas - \$1,595. Stoddart NM-30A, 20-400MHZ. Complete - \$1,295. Stoddart NM-52A, 375-1000MHZ. Complete - \$1,495, less antennas - \$1,095. All are in excellent condition and calibrated prior to shipment. Surcom Associates, (213) 382-6985. 12-74-6t

100 WATT UHF TV TRANSLATOR: Emcee model U-HTU-100-D. Slightly used less than 6 months. Channel 24 in, channel 18 out, can be retuned. New cost \$7,000.00. Available immediately for \$2,000.00. Frontier Engineering Corporation, P.O. Box 265, Florham Park, New Jersey 07932, (201) 822-3030. 12-74-3t

FM EXCITER AND STEREO GENERATOR: New Solid State FM Exciter, complete with Stereo Generator. 1975.00. Terms. COMMUNICATION SYSTEMS, INC., DRAWER C, CAPE GIRARDEAU, MISSOURI 63701. 314-334-6097 1-75-2t

FOR SALE - IVC 820C 1" Color VTR's. Guam Cable TV has switched to 3/4" cassettes to save shipping weight. We have four recorders in excellent operating condition for sale at our Los Angeles office at \$900 each. Also, spares and tapes available. Phone (213) 474-2891. 2-75-1t

EQUIPMENT FOR SALE (CONT.)

BACKGROUND MUSIC RECEIVERS. Excellent condition, latest design. \$90.00 each. WMDR, Box 461, Moline, Ill. 61265 1-75-3t

EC-175 FREQUENCY COUNTER: Accurate direct frequency measurements of your AM BROADCAST, FM BROADCAST, and REMOTE BROADCAST units through 175 Mhz. Works on AC and 12V DC. Complete with Accessories. 499.95 F.O.B. Terms. COMMUNICATION SYSTEMS, INC. Drawer C, Cape Girardeau, Missouri 63701. 314-334-6097 1-75-2t

TWO-IVC 150 Plumbicon Color Cameras with: Extended red, Lenco CEC 810 Broadcast encoders; One RTH Servo Iris 10:1 Zoom Lens; One 6:1 Nikor Zoom Lens; Two Gibraltar Quick-Set Heads and Dollies, 50-Ft. Cables, and Remote Camera Control Units, \$25,000.00 One - MOD RSS Teleprompter Unit with Two Displays, Control Unit Cables, and IBM typewriter, \$3,500.00. Contact: John M. Allison, Taft Broadcasting Corporation, Houston, Texas, 77027. Phone (713) 622-1010. 1-75-2t

CVS 500 TIME BASE CORRECTOR Less than 1 year old, completely factory checked since last used.

MICROBAND CORPORATION OF AMERICA
(212) 964-5700 2-75-1t

FULL LINE TUNING and phasing components available, including contactors, also large supply separate contacts for E. F. Johnson contactors. Write: Geleco Electronics, Ltd., #2 Thorncliffe Park Drive, Unit 28, Toronto 17, Canada. Phone: (416) 421-5631. 2-75-tf

A FEW competitively priced used Revox A77 decks available completely reconditioned by Revox, virtually indistinguishable from new and have the standard Revox 90 day warranty for rebuilt machines. Satisfaction guaranteed. Example A77 with Dolby \$675 plus shipping. Write requirements to ESSl, Box 854, Hicksville, N.Y. 11802 (212-895-9257). 2-75-2t

COLLINS 830E SERIES FM 5KW Final Amplifier with Solid State Power Supplies. MINT Condition \$4500.00. Station WGUC, 110 Emery Hall, University of Cincinnati, Cincinnati, Ohio 45221. Phone: (513) 475-4444. 2-75-1t

745' TV TOWER, 6-1/8 Trans. line—6 yrs. Good Condition. Channel 62 antenna. WXON-TV, P.O. Box 20; Walled Lake, Mich. 48088 (313) 624-0310 2-75-2t

RCA TR22 Low Band with mono and color ATC and RCA TR5 Low Band Color Video tape recorders, Dynair TS-100B Side-band analyzer. WWAY-TV, P.O. Box 2068, Wilmington, N.C. 28401. (919) 762-8581. 2-75-2t

FOR SALE: RCA RT-16, 6 deck multitrack cartridge tape playback unit. New condition, still in factory carton. Originally \$2500; will sell for \$1500. Contact Chief Engineer, WCUZ RADIO, #1 McKay Tower, Grand Rapids, Michigan 49502. 616-451-2551. 2-75-2t

TELEVISION MOBILE UNIT, 8' x 30', Gerstanschlager custom on IH chassis, low mileage, power distribution system, air conditioned, equipment consoles, interior and exterior storage compartments. Complete production complex. RCA TR-4 lo-band color VTR, air bearing conversion with compressor, splicer harness (edit). RCA-TR-5. Write to: Broadcast Engineering, Dept. 316, 1014 Wyandotte St., Kansas City, Mo. 64105 2-75-1t

SERVICES

FREQUENCY MEASURING SERVICE—WE'RE #2—MONITOR REPAIRS—MOBILE UNIT— covers Northern 2/3 Ill., Eastern Iowa, Eastern Minn., Southern 2/3 Wis., Western Mich., and Western Ind., monthly. Radio Aids, 528 Ravine Ave., Lake Bluff, Illinois 60044, (312) 234-0953 2-74-tf

FRENCH ELECTRIC COMPANY, INC. TV and Radio general service including electrical contracting, TV and Radio Engineering; over 25 years experience. CALL US—WE WILL WIRE YOU. 371-9100. Detroit, Michigan. 9-74-6t

SERVICES (CONT.)

BROADCAST CRYSTALS for AM, FM or TV transmitters. Frequency change, repair or replacement of oven types; also new vacuum types. Quality products, reasonable prices and better delivery! Don't be without a spare crystal. Repair of G.R. 1931-A/B modulation monitors and frequency change of AM and FM frequency monitors. Over 30 years in the business. Eidson Electronic Co., Box 96, Temple, Texas 76501. Phone (817) 773-3901. 12-74-tf

COMMERCIAL RADIO MONITORING CO. Precision frequency measurements since 1932. Local and mobile service covering entire midwest plus. Test instruments, counters, monitors repaired and certified. Lee's Summit, Mo. 64063. (816) 524-3777. 9-74-tf

CAMERA TUBES...ALL TYPES EXCEPT ORTHICONS CAN NOW BE RECONDITIONED AT AN UNBELIEVABLE PRICE, LEAD OXIDE TYPES \$275.00, VIDICONS FROM \$35 TO \$200.00. ALL RECONDITIONED TUBES COME WITH 500 HOUR WARRANTY. FOR DETAILS WRITE: RODONCO ENGINEERING, CAMERA TUBE DIV., 4020 STAPLETON DR., BLOOMINGTON, IND. 47401 (FORMERLY COLLINS TELEVISION SERVICES.) 7-74-9t

HELP WANTED

MOVE UP from your present job in broadcast engineering. We handle all engineering jobs and openings coast to coast. Send full resume confidentially now. The AMPS Agency, 6331 Hollywood Blvd., Suite 623. Los Angeles, Calif. 90028. Tel: (213) 462-7301. 8-73-tf

FIELD SERVICE ENGINEER

Extensive travel, all benefits. Experience in color video and switching systems preferred. Contact: Mr. Buzan, Vital Industries, Inc., 3700 N.E. 53rd Ave., Gainesville, Fla. 32601. Phone 904/378-1581.

REGIONAL SALES and Application Engineering Manager - Chicago Based. Key man required to manage distributor sales and carry out applications engineering with Broadcast, Teleproduction and origination studio customers. Products include time base velocity and correctors for quad and helical VTRs. Applicant background should include current video engineering and sales experience. This is a career opportunity for a qualified and aggressive individual willing to assume independent responsibilities. TELEVISION MICROTIME, INC., Subsidiary of Anderson Laboratories, Inc., 1280 Blue Hill Ave., Bloomfield, Conn. 06002 Att: Pat Pond, Personnel Manager. An Equal Opportunity Employer 2-75-1t

National Sales Manager Western Regional Sales Manager Central Regional Sales Manager

Establishing a new sales organization to market an exciting new product line of time base correctors and, yet to be introduced interactive television products - nation wide. Looking for high caliber, experienced personnel with video product sales background.

Engineering Manager Senior Design Engineers

Exciting new products that demand experienced design engineers with video recording and video product design background.

Contact or Send Resume To:

EduTron INCORPORATED

3700 B-2 N.E. 53rd Ave. Gainesville, Fla. 32601
Phone (904) 377-1411

HELP WANTED (CONT.)

MAINTENANCE AND OPERATIONS engineer needed for University color television production center. Equipment includes: Ampex 1200s, GE color cameras, digital switchers with grass valley effects. Send resume and salary expectations to: Dr. Charles Anderson, Director of Media Services, Academic Complex, Western Kentucky University, Bowling Green, Kentucky 42101. Western Kentucky University is an equal opportunity employer. 1-75-2t

IMMEDIATE OPENING for studio maintenance technician, experienced with Quad VTR's, to work with color facility and FM radio station, First Class license required. Write, enclosing resume, to L. Alexander, Personnel Dept., San Diego Community College District, 3375 Camino Del Rio South, San Diego, CA, 92108. 2-75-1t

TRAINING

PASS FCC first and second class exams with new 21 - lesson, 450-page course. Starts with basic electricity. Over 600 FCC-type, multiple-choice questions and sample exams included. No previous technical knowledge required. Commercial Radio Operator Theory Course, #15-01. Only \$5.95. Ameco Publishing, 275G Hillside Ave., Williston Park, N.Y. 11596. 8-72-tf


PASS FCC EXAMS with Ameco books. Each book contains FCC questions plus simplified answers plus FCC-type exams and answers. 3rd class \$1.00, 2nd class \$2.25, 1st class \$1.50. Free catalog. Ameco Publishing, 275G Hillside Ave., Williston Park, N.Y. 11596 8-72-tf

EARN YOUR ELECTRONICS DEGREE by correspondence, G. I. Bill approved. For free brochure, write Grantham School of Engineering, Information Desk, 2000 Stoner Avenue, Los Angeles, Calif. 90025. 8-72-tf

BROADCAST ENDORSEMENT and third phone preparation on cassettes. Illustration book includes current FCC-type exams. Radio License Preparation, 1060D Duncan, Manhattan Beach, Calif. 90266. 8-74-tf

FIRST PHONE in six to twelve weeks through tape recorded lessons at home plus one week personal instruction in Boston, Philadelphia, Detroit, Atlanta, Minneapolis, Seattle or Los Angeles. Our twentieth year teaching FCC license courses. Bob Johnson Radio License Preparation, 1060D Duncan, Manhattan Beach, Calif. 90266 Telephone 213-379-4461 2-75-tf

It's Time...

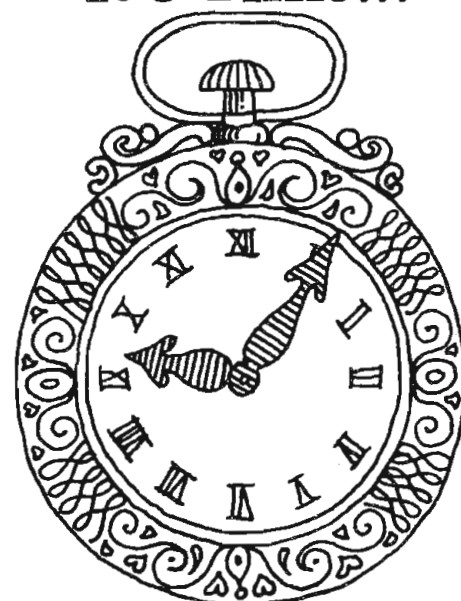

March of Dimes Time.

THIS SPACE CONTRIBUTED BY THE PUBLISHER


Our new E series audio equipment will improve your sound and cut your costs . . . or your money back!




**TURNTABLE
PREAMPS**



**MIC & LINE
AMPLIFIERS**

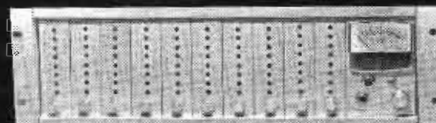

AUDIO DISTRIBUTION AMPLIFIERS

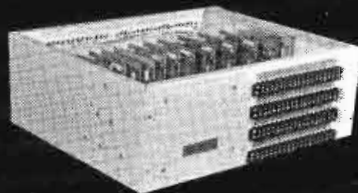


AUDIO CONSOLES & CONTROLLERS



**STUDIO MONITOR
AMPLIFIERS**



**REMOTE POWER
CONTROLLERS**

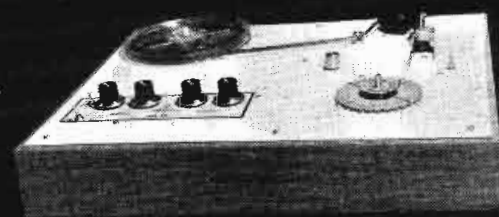

**AUTOMATIC TAPE CARTRIDGE
& CASSETTE LOADERS**

TEN DAY FREE EVALUATION AND 2 YEAR GUARANTEE INSURE YOUR UNCOMPROMISED SATISFACTION

TURNTABLE PREAMPS

Preamps costing almost 3 times more will not compare with these units. RIAA/NAB equalized ± 1 db, 0.5MV sensitivity at 1KHz for +4dbm out, balanced outputs, -75db s/n at 10mv in, 0.05% distortion, +21dbm max. out. Internal power supply.

MP-8E Mono \$86 SP-8E Stereo \$137

MIC & LINE AMPLIFIERS

Dual function and superb performance. Inputs for mic and line, ± 0.5 db response 10Hz-20KHz, 67db gain on mic channel(s) +26db gain on line inputs. Balanced inputs & outputs, +21dbm out max, 0.1% distortion. Internal power supply.

MLA-1E Mono \$98
MLA-2E Dual Mono/Stereo \$139

AUDIO DISTRIBUTION AMPLIFIERS

From 1 in/6 out to 20 in/80 out in one small package. Whatever your distribution requirements we have an answer. All units meet or exceed the following specifications: Balanced bridging/matching inputs, balanced 600ohm outputs, ± 0.5 db response 10Hz-20KHz, ± 3 db 5Hz-40KHz, 26db gain, +21dbm out. max. capability, 0.1% or less distortion, outputs isolated by 80db, hum and noise 90db down referenced to +21dbm out. Internal power supplies.

DA-6/E	Table top. 1 in/6 out.	\$131
DA-6R/E	Rack mount. 1 in/6 out.	\$149
DA-6BR/E	Rack mount. 1 in/6 out. Individual level controls for each output.	\$165
DA-6RS/E	Rack mount. 1 in/6 out stereo or 2 in/12 out mono.	\$229
DA-16BR/E	Rack mount. 1 in/8 out stereo or 2 in/16 out mono. Individual output level controls, selectable metering & headphone monitoring.	\$287
DA-2080/E	Rack mount main frame with protected	

power supply, metering & headphone monitor. Will accept up to 10 slide in modules. Each module has 2 inputs & 8 outputs. Individual output level controls & selectable meter switch. Up to 20 in/80 out.

DA-2080/E	Main Frame	\$150
DA-2080/E	Modules 2 in/8 out	\$135 ea.

AUDIO CONSOLES & CONTROLLERS

Our new series 35 audio controller introduces a new concept in audio mixing. Allows separation of controls from the audio functions. Controls can be placed in any convenient location in the studio, while electronics may be mounted anywhere for easy maintenance & hookup. Remote DC control for completely unaffected audio.

This versatility gives you a custom designed console at a standard production model cost.

Features include; 8 channels, mono, dual channel mono, stereo, dual channel stereo, or combinations; paralleling 2 units for quad, fail safe power supply & plug in interchangeable cards.

Performance specifications are; 0.3% or less distortion, 124dbm equivalent noise on low level channels, approximately 25w power consumption, -70db crosstalk, balanced bridging/matching inputs & response within ± 2 db 20Hz-20KHz. Series 35 audio controllers start at \$1200.

AUTOMATIC TAPE CARTRIDGE AND CASSETTE LOADERS

So easy to use & accurate that our largest winder competitor has been using one of these to load their own carts.

Eliminates guesswork. Set the dials to the length desired. The exact amount of tape is fed onto the cart or cassette hub and then shuts off automatically. Also has exclusive torque control for proper tape pack on different size hubs. Winds at 30 IPS.

ACL-25/E	\$185
----------	-------

Winders also come in higher speed models (ACL-60 series). Same operation as above but winds at 60 IPS. Accepts 14" pancakes.

ACL-60T/E	(tone stop only)	\$266
ACL-60B/E	(Blank tape loader)	\$331
ACL-60BT/E	(for both prerecorded and blank tape)	\$375

STUDIO MONITOR AMPLIFIERS

Exceptional reproduction! Internal muting. ± 2 db response from 20Hz-40KHz. 25w music power, 20w RMS into 8 ohms. Hum & noise 65db below rated outputs.

Distortion less than 0.25% at less than 20w out, 1% or less at 20w. Works into 4-16ohms. Balanced bridging inputs, variable bass contour, internal overload & short circuit protection.

SMA-50/E	Table top (mono)	\$125
SMA-500/E	Rack mount (mono)	\$142
SMA-1000/E	Rack mount (stereo-40w)	\$196

REMOTE POWER CONTROLLERS (DUAL)

Safe, transient free means of controlling 110V/AC. Turntables, on the air lights, etc.


PR-2	(toggle switch on/off)	\$39
PR-2B	(momentary contact actuation)	\$54

Give us a call or write today for further details. You'll be money and performance ahead.


CALL COLLECT — (916) 392-2100
WRITE — 3516-C LaGrande Boulevard
Sacramento, California 95823

RAMKO RESEARCH

For More Details Circle (54) on Reply Card

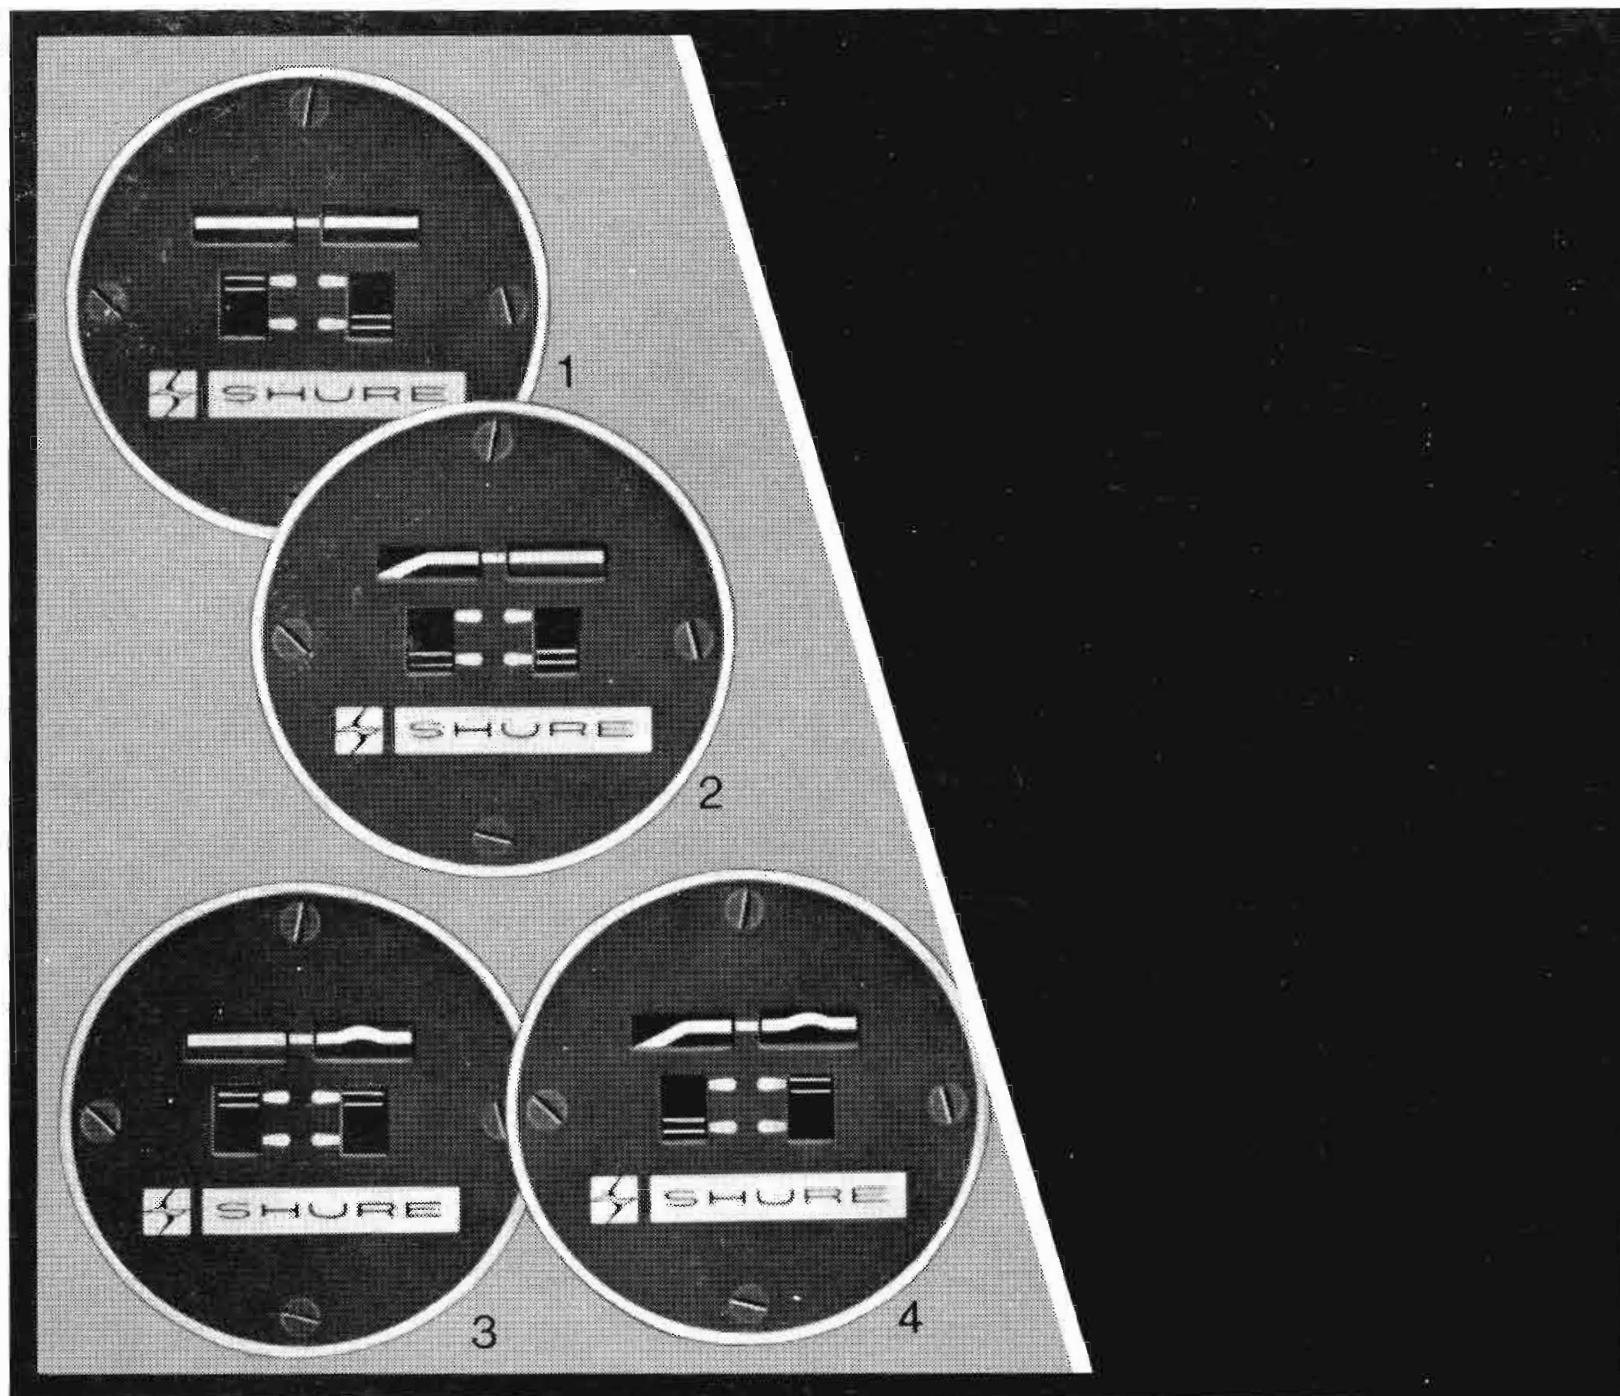

What you see is what you get.

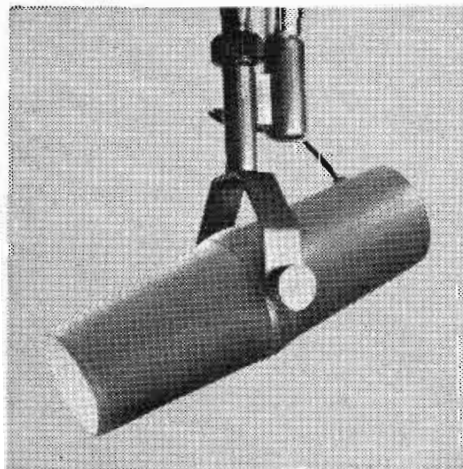

The extraordinary Shure SM7 professional microphone features something you've never seen before: a *built-in Visual Indication Response Tailoring System* that offers you four different frequency response curves—and shows you the curve you've selected with a graphic readout (see above) at the back of the microphone! Choose: 1. flat response; 2. bass roll-off; 3. presence boost; 4. combination of roll-off and presence. And there's more: the SM7 delivers exceptional noise isolation with a revolutionary pneumatic suspension mount... an ultra-wide, ultra-smooth frequency response... an integral "pop" and wind filter... and a cardioid pickup pattern that looks "text-book perfect." The Shure SM7 Studio Microphone was extensively field-tested in recording studios and broadcasting stations! Write:

Shure Brothers Inc.
222 Hartrey Ave., Evanston, Ill. 60204
 In Canada: A. C. Simmonds & Sons, Ltd.



For More Details Circle (55) on Reply Card