


Type 1840-A OUTPUT POWER METER

- 20 Hz to 20 kHz
- 0.1 mW to 20 W
- 0.6- Ω to 32-k Ω input impedance
- true rms reading

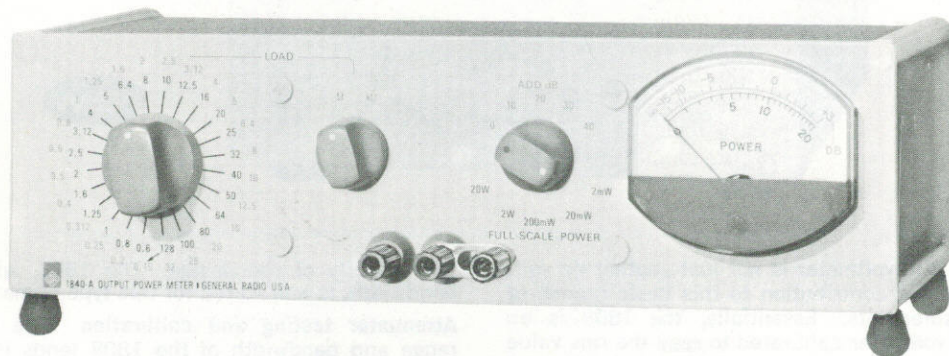


The 1840-A measures audio-frequency power into any desired load. Its important uses include the measurement of:

- Power output of oscillators, amplifiers, preamplifiers, transformers, transducers, and low-frequency lines.
- Output impedance, by adjustment of the load to yield maximum power indication.
- Frequency-response characteristics of amplifiers, transformers, and other audio-frequency devices.

This instrument is basically a multi-tapped audio-frequency transformer with a fixed secondary load. Its two front-panel switches connect eight identical primary windings and six secondary taps in various combinations to provide a total of 48 different primary impedances.

The maximum power rating can be extended for any given impedance with the use of a simple T-network attenuator, design data for which are supplied with the instrument.

— See *GR Experimenter* for January-February 1962.

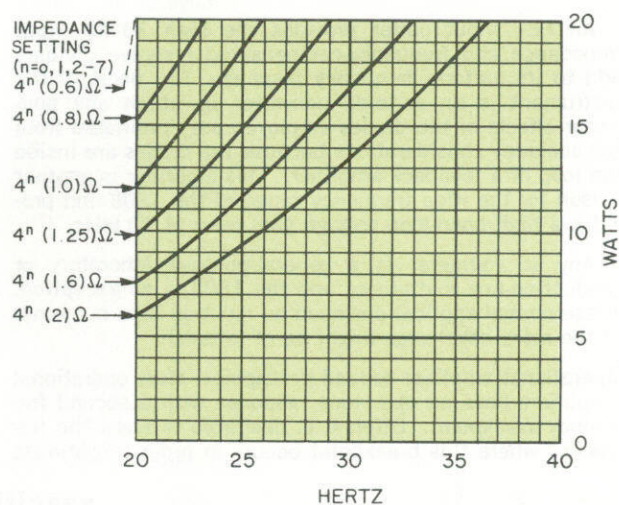

Derating vs impedance setting and frequency.

specifications

RANGES

Power: 0.1 mW to 20 W, 40 Hz to 20 kHz. Below 40 Hz, max rating is reduced by up to 50% (at 25 Hz), depending on impedance selected. See curve. Auxiliary dB scale reads from -15 to +43 dB re 1 mW.

Impedance: 0.6 Ω to 32 k Ω in two ranges; yielding 48 individual impedances spaced approximately $\sqrt[3]{2}$ apart.

ACCURACY

Power: At 1 kHz, ± 0.3 dB;
50 Hz to 6 kHz, ± 0.5 dB;
30 Hz to 10 kHz, ± 1 dB;
at 20 Hz, -1.5 dB max, -1 dB avg;
at 20 kHz, -5 dB max, ± 1.5 dB avg.

Impedance: At 1 kHz, $\pm 6\%$ max, -0.5% avg;
70 Hz to 2.5 kHz, $\pm 7\%$ above 10 k Ω ;
70 Hz to 5 kHz, $\pm 7\%$ below 10 k Ω ;

at 20 Hz, -15% max, -8% avg;
at 20 kHz, $\pm 50\%$ max, $\pm 12\%$ avg.

Waveform Error: Meter will indicate true rms with as much as 20% second and third harmonics present in the input signal.

GENERAL

Mounting: Convertible-Bench Cabinet. Adaptors for rack mounting available.

Dimensions (width x height x depth): 12 x 4 x 8 in. (305 x 105 x 205 mm). Rack-adaptor panel height, 3 1/2 in.

Weight: Net, 10 3/4 lb (4.9 kg); shipping, 17 lb (8 kg).

Catalog Number	Description
1840-9701	1840-A Output Power Meter
0480-9622	480-P212 Relay-Rack Adaptor Set



IET LABS, INC.

534 Main Street, Westbury, NY 11590

Tel (516) 334-5959 (800) 899-8438 Fax (516) 334-5988 <http://www.ietlabs.com>