JANUARY 1985 VOL. 10, NO. 1

$3.50 IN UNITED STATES
$4.25 in CANADA / £2.10 in U.K.
A McGRAW-HILL PUBLICATION
0360-5280

BYTE

marcus b.

THE SMALL SYSTEMS JOURNAL



THROUGH THE HOURGLASS

Why every kid should ha

Today, there are more Apples in schools than any other computer.

Unfortunately, there are still more kids in schools than Apples.

So innocent youngsters (like your own) may have to fend off packs of bully nerds to get some time on a computer.

Which is why it makes good sense to buy them an Apple® IIc Personal Computer of their very own.

The IIc is just like the leading computer in education, the Apple IIe. Only smaller. About the size of a three-ring notebook, to be exact.

Even the price of the IIc is small—under $1100.*

Of course, since the IIc is the legitimate offspring of the IIe, it can access the world's largest library of educational software. Everything from Stickybear Shapes™ for preschoolers to SAT test preparation programs for college hopefuls.

In fact, the IIc can run over 10,000 programs in all. More than a few of which you might be interested in yourself.

For example, 3-in-1 integrated business software. Home accounting and tax programs. Diet and fitness programs.

Not to mention fun programs for the whole family. Like "Genetic Mapping" and

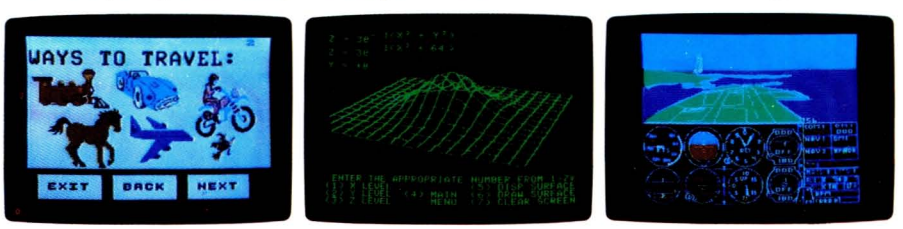

With a IIc, your kid can do something constructive after school. Like learn to write stories. Or learn to fly. Or even learn something slightly more advanced. Like multivariable calculus.

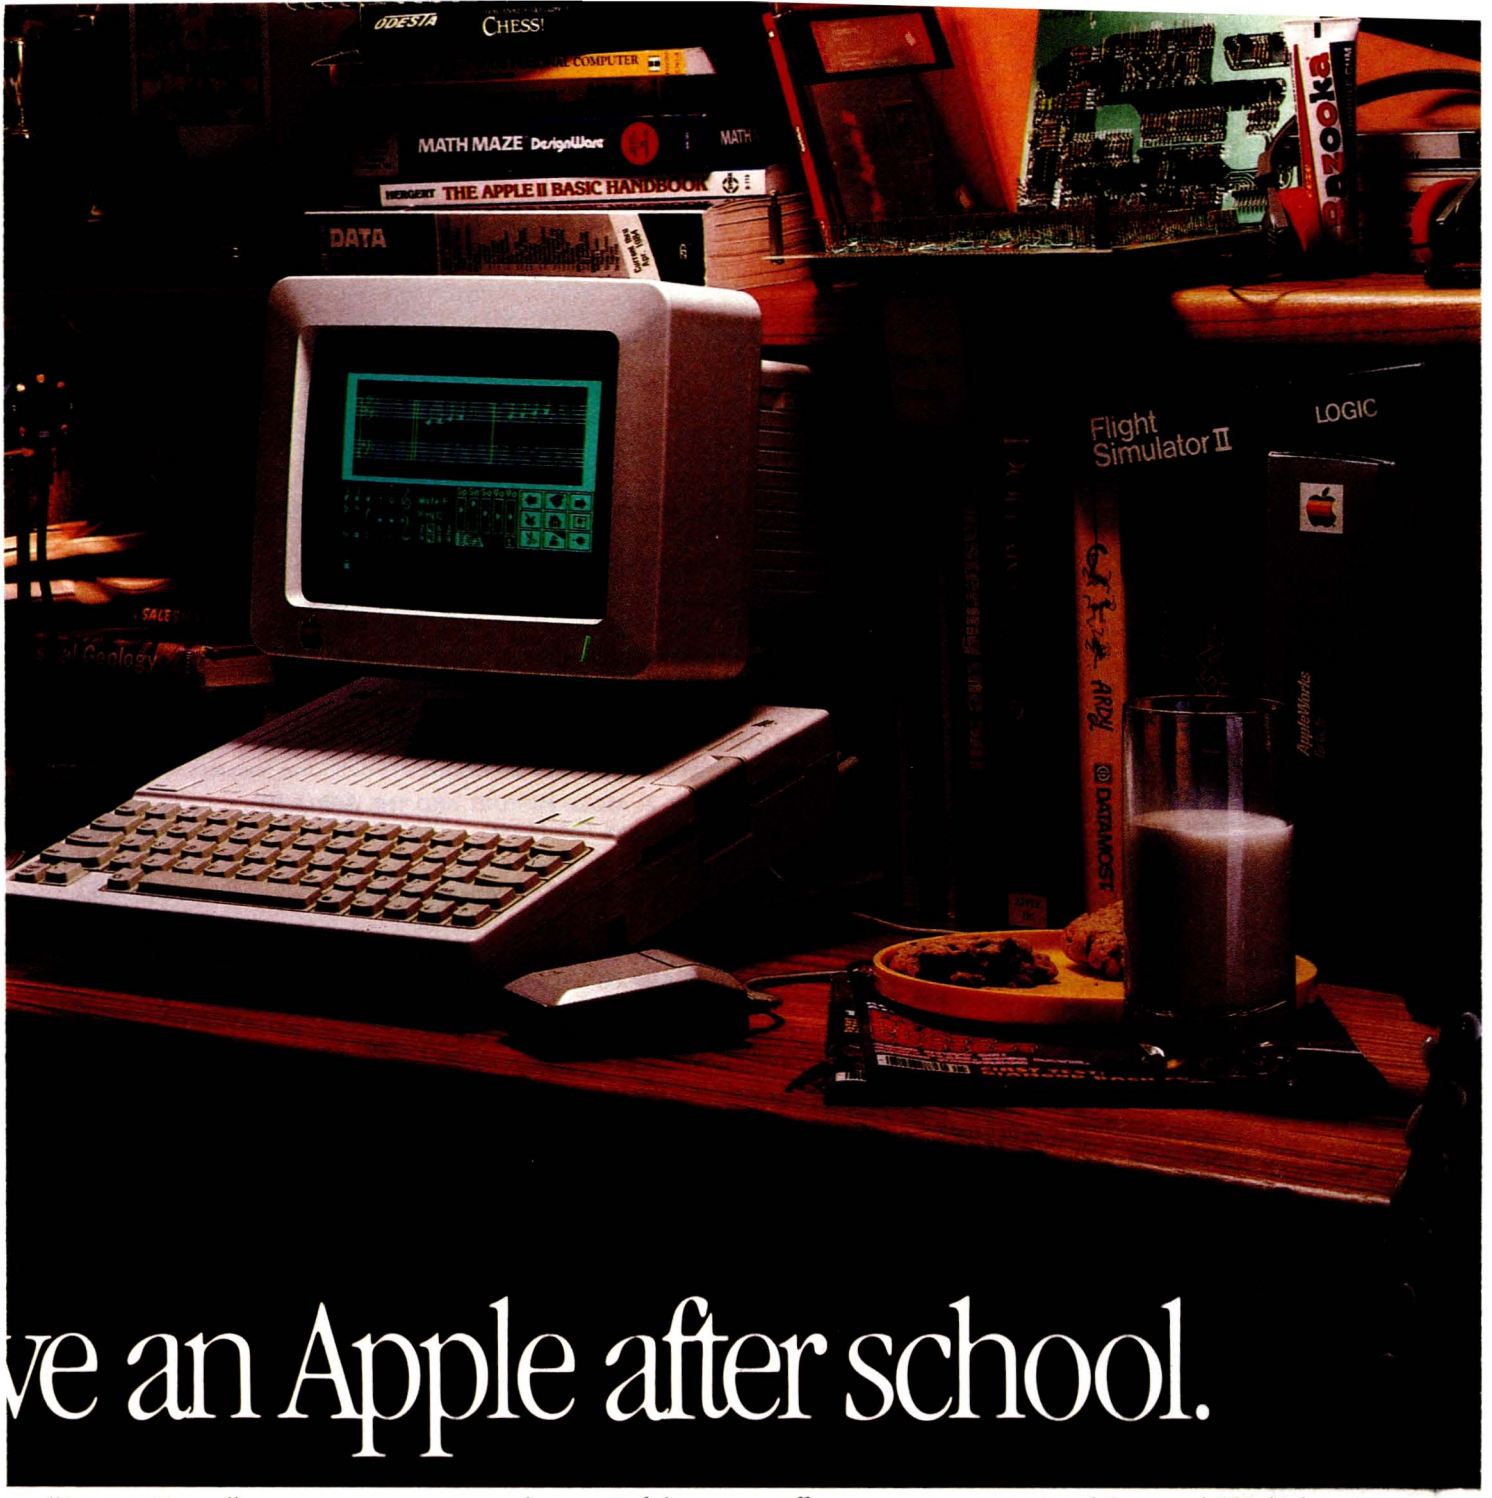

ve an Apple after school.

"Enzyme Kinetics."

And the Apple IIc comes complete with everything you need to start computing in one box.

Including a free 4-diskette course to teach you how—when your kids get tired of your questions.

An RF modulator that can turn almost any TV into a monitor.

As well as a long list of built-in features that would add about $800 to the cost of a smaller-minded computer.

128K of internal memory—twice the power of the average office computer.

A built-in disk drive that would drive up the price of a less-senior machine.

And built-in electronics for adding accessories like a printer, a modem, an AppleMouse or an extra disk drive when the time comes.

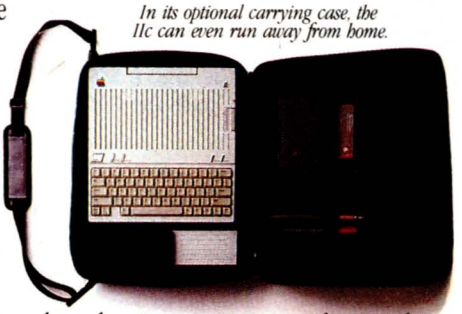

In its optional carrying case, the IIc can even run away from home.

So while your children's shoe sizes and appetites continue to grow at an alarming rate, there's one thing you know can keep up with them. Their Apple IIc.

To learn more about it, visit any authorized Apple dealer. Or talk to your own computer experts.

As soon as they get home from school.

** The FTC is concerned about price-fixing. So this is only a Suggested Retail Price. You can pay more if you really want to. © 1984 Apple Computer Inc. Apple and the Apple logo are registered trademarks of Apple Computer Inc. Stickybear Shapes is a trademark of Optimum Resource. For an authorized Apple dealer nearest you call* ***(800) 538-9696.*** *In Canada, call* ***(800) 268-7796*** *or* ***(800) 268-7637.***

C·O·N·T·E·N·T·S

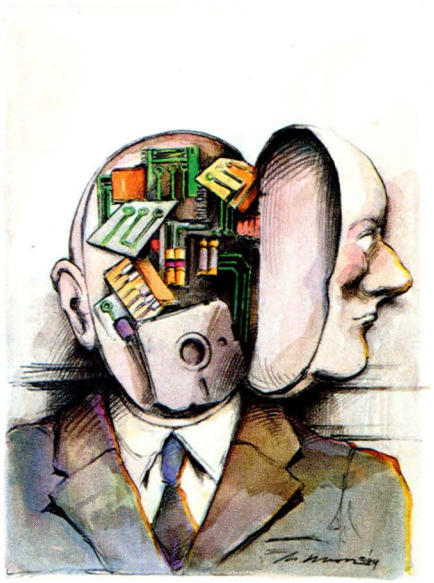

96



286

FEATURES

INTRODUCTION **96**

CIARCIA'S CIRCUIT CELLAR: UNDERSTANDING LINEAR POWER SUPPLIES *by Steve Ciarcia* **98**
Proper design brings simplicity and reliability.

THE VISUAL MIND AND THE MACINTOSH *by Bill Benzon* **113**
MacPaint provides a tool for thinking.

A GLIMPSE INTO FUTURE TELEVISION *by Joseph S. Nadan* **135**
How will high-definition television open the window on the world for users of personal computers?

MICROSOFT MACINTOSH BASIC VERSION 2.0 *by Gregg Williams* **155**
This new version offers greater support of the Macintosh's distinctive features.

THE APPLE STORY, PART 2: MORE HISTORY AND THE APPLE III *conducted by Gregg Williams and Rob Moore* **167**
The interview with Steve Wozniak continues.

UNINTERRUPTIBLE POWER SUPPLIES *by William Rynone* **183**
These devices can save you from losing data in the dark.

AN INTRODUCTION TO FIBER OPTICS, PART 2: CONNECTIONS AND NETWORKS *by Richard S. Shuford* **197**
Optical fibers are becoming practical for use in applications such as local networks.

ALGORITHMS FOR A VARIABLE-PRECISION CALCULATOR *by Paul A. Nilson* **211**
There's help for those who need to perform decimal computations on large numbers.

AUDIO-FREQUENCY ANALYZER *by Vince Banes* **223**
You can build IBM PC accessories to analyze your stereo.

FONT DESIGN FOR PERSONAL WORKSTATIONS *by Charles Bigelow* **255**
Improved on-screen and printer fonts can help to make computers more acceptable as tools for a literate public.

EXPERT SYSTEMS—MYTH OR REALITY? *by Bruce D'Ambrosio* **275**
Artificial intelligence is considered by some to be one of the most important technologies on the horizon.

REVIEWS

INTRODUCTION **286**

REVIEWER'S NOTEBOOK *by Rich Malloy* **289**

THE HP 110 PORTABLE COMPUTER *by Mark Haas* **290**
Hewlett-Packard's 80C86-based lap-size machine.

GIFFORD'S MP/M 8-16 *by Charles H. Strom* **305**
A multiuser S-100–based operating system.

BYTE is published monthly by McGraw-Hill Inc. Founder: James H. McGraw (1860-1948). Executive, editorial, circulation, and advertising offices: 70 Main St., Peterborough, NH 03458, phone (603) 924-9281. Office hours: Mon—Thur 8:30 AM — 4:30 PM, Friday 8:30 AM — 1:00 PM, Eastern Time. Address subscriptions to BYTE Subscriptions, POB 590, Martinsville, NJ 08836. Postmaster: send address changes, USPS Form 3579, undeliverable copies, and fulfillment questions to BYTE Subscriptions, POB 596, Martinsville, NJ 08836. Second-class postage paid at Peterborough, NH 03458 and additional mailing offices. USPS Publication No. 528890 (ISSN 0360-5280). Postage paid at Winnipeg, Manitoba. Registration number 9321. Subscriptions are $21 for one year, $38 for two years, and $55 for three years in the USA and its possessions. In Canada and Mexico, $23 for one year, $42 for two years, $61 for three years. $69 for one year air delivery to Europe. 17,100 yen for one year surface delivery to Japan. $37 surface delivery elsewhere. Air delivery to selected areas at additional rates upon request. Single copy price is $3.50 in the USA and its possessions, $3.95 in Canada and Mexico, $4.50 in Europe, and $5 elsewhere. Foreign subscriptions and sales should be remitted in United States funds drawn on a U.S. bank. Please allow six to eight weeks for delivery of first issue. Printed in the United States of America.

COVER ILLUSTRATION BY ROBERT TINNEY

BYTE January

VOLUME 10, NUMBER 1, 1985

LOTUS'S SYMPHONY *by Dick Pountain* 317
Another large, multipurpose spreadsheet program from the makers of 1-2-3.

MAGICPRINT *by Alan R. Miller* 329
Enhanced print programs for CP/M and MS-DOS systems.

THE HEWLETT-PACKARD THINKJET PRINTER *by Mark Haas* 337
Ink-jet technology for HP, IBM, and Apple computers.

THE TI OMNI 800/MODEL 855 PRINTER *by Mark Haas* 345
Multiple fonts via ROM cartridges.

REVIEW FEEDBACK 353
Readers respond to previous reviews.

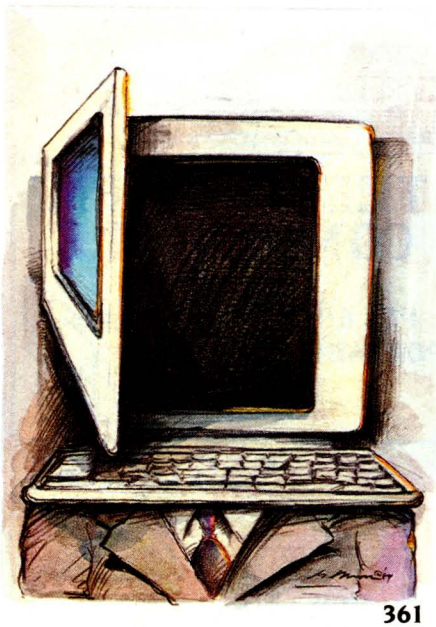

361

KERNEL

INTRODUCTION 361

COMPUTING AT CHAOS MANOR: THE FAST LANE *by Jerry Pournelle* 363
This month's whirlwind tour of the computing scene includes a look at Orchid's PCturbo 186, the MI-286 from Macrotech, and Ashton-Tate's dBASE III.

CHAOS MANOR MAIL *conducted by Jerry Pournelle* 393
Jerry's readers write, and he replies.

BYTE U.K.: THE AMSTRAD CPC 464 *by Dick Pountain* 401
This "home" computer has potential for business applications as well.

CIRCUIT CELLAR FEEDBACK *conducted by Steve Ciarcia* 413
Steve answers project-related queries from readers.

BYTE WEST COAST: LIGHT TOUCHES *by John Markoff and Phillip Robinson* . . . 415
The Mac goes to college, and mice and laser disks are in the news.

MATHEMATICAL RECREATIONS: THE FUNDAMENTAL COUNTING PRINCIPLE *by Michael W. Ecker* 425
Dr. Ecker explores ways of counting without enumerating.

BYTE JAPAN: THE NEW AND THE OLD *by William M. Raike* 429
Our Tokyo correspondent focuses on denser chips and software piracy in the East.

EDITORIAL: AUTONOMOUS WEAPONS AND HUMAN RESPONSIBILITY 6
MICROBYTES 9
LETTERS 14
FIXES AND UPDATES 33
WHAT'S NEW 39, 440
ASK BYTE 48
CLUBS & NEWSLETTERS 59
BOOK REVIEWS 65
EVENT QUEUE 83
BOOKS RECEIVED 435
UNCLASSIFIED ADS 493
BYTE'S ONGOING MONITOR BOX, BOMB RESULTS 494
READER SERVICE 495

Address all editorial correspondence to the Editor, BYTE, POB 372, Hancock, NH 03449. Unacceptable manuscripts will be returned if accompanied by sufficient first-class postage. Not responsible for lost manuscripts or photos. Opinions expressed by the authors are not necessarily those of BYTE.
Copyright © 1985 by McGraw-Hill Inc. All rights reserved. Trademark registered in the United States Patent and Trademark Office. Where necessary, permission is granted by the copyright owner for libraries and others registered with the Copyright Clearance Center (CCC) to photocopy any article herein for the flat fee of $1.50 per copy of the article or any part thereof. Correspondence and payment should be sent directly to the CCC, 29 Congress St., Salem, MA 01970. Specify ISSN 0360-5280/83, $1.50. Copying done for other than personal or internal reference use without the permission of McGraw-Hill Inc. is prohibited. Requests for special permission or bulk orders should be addressed to the publisher. BYTE is available in microform from University Microfilms International, 300 North Zeeb Rd., Dept. PR, Ann Arbor, MI 48106 or 18 Bedford Row, Dept. PR, London WC1R 4EJ England.
Subscription questions or problems should be addressed to: BYTE Subscriber Service, POB 328, Hancock, NH 03449

SECTION ART BY GEOFFREY MOSS

MicroTime



800-MICRO 84



SAVE ON ZENITH

THE BEST IBM® COMPATIBLE

PC160 PORTABLE



SANYO 555 SERIES
PRICED TOO LOW TO PRINT



WE HAVE ALL EPSON PRINTERS IN STOCK AT LOW PRICES



IBM PC
PC-AT
$CALL

IOMEGA



BERNOULLI BOX
20 MEGABYTE
ULTRA FAST
REMOVABLE
STORAGE

COLUMBIA
FRANKLIN
COMPAQ
NEC

OKIDATA
AND
DIABLO
PRINTERS

WE SPECIALIZE IN SYSTEM SALES

CALL US FOR THE LOWEST PRICES ON ALL COMPUTER PRODUCTS

800-642-7684
IN ARIZONA 602-791-9030

IBM is a registered trademark of International Business Machines, Corp.

411 West Grant Road
Tucson, Arizona 85705

VISA MasterCard

BYTE

EDITOR IN CHIEF
Philip Lemmons
MANAGING EDITOR
Gene Smarte
CONSULTING EDITORS
Steve Ciarcia
Jerry Pournelle
SENIOR TECHNICAL EDITORS
G. Michael Vose, *Themes*
Gregg Williams
TECHNICAL EDITORS
Thomas R. Clune
Jon R. Edwards
Glenn Hartwig, *Reviews*
Richard Krajewski
Ken Sheldon
Richard S. Shuford
Jane Morrill Tazelaar
Stanley Wszola
Margaret Cook Gurney, *Associate*
Alan Easton, *Drafting*
WEST COAST EDITORS
Ezra Shapiro, *Bureau Chief, San Francisco*
John Markoff, *Senior Technical Editor, Palo Alto*
Phillip Robinson, *Senior Technical Editor, Palo Alto*
Donna Osgood, *Associate Editor, San Francisco*
Brenda McLaughlin, *Editorial Assistant, San Francisco*
NEW YORK EDITOR
Richard Malloy, *Senior Technical Editor*
MANAGING EDITOR, USER NEWS
George Bond
USER NEWS EDITORS
Anthony J. Lockwood, *What's New*
Mark Welch, *Microbytes*

CONTRIBUTING EDITORS
Dennis Allison, *at large*
Mark Dahmke, *video, operating systems*
Mark Haas, *at large*
Rik Jadrnicek, *CAD, graphics, spreadsheets*
Mark Klein, *communications*
Alan Miller, *languages and engineering*
John C. Nash, *scientific computing*
Dick Pountain, *U.K.*
William M. Raike, *Japan*
Perry Saidman, *computers and law*
Robert Sterne, *computers and law*
Bruce Webster, *software*

COPY EDITORS
Bud Sadler, *Chief*
Dennis Barker
Elizabeth Cooper
Anne L. Fischer
Nancy Hayes
Lynne M. Nadeau
Paula Noonan
Joan V. Roy
Warren Williamson

ASSISTANTS
Peggy Dunham
Martha Hicks
Beverly Jackson
Faith Kluntz, *Copyrights and Permissions*
Lisa Jo Steiner

ART
Rosslyn A. Frick, *Art Director*
Nancy Rice, *Assistant Art Director*

PRODUCTION
David R. Anderson, *Production Director*
Denise Chartrand
Michael J. Lonsky
Jan Muller
Sherry McCarthy, *Chief Typographer*
Nan Fornal
Len Lorette
Kathy Quist
Donna Sweeney

PUBLISHER
Gene W. Simpson
ASSISTANT PUBLISHER
Michele P. Verville
PUBLISHER'S ASSISTANT
Doris R. Gamble

ADVERTISING SALES
J. Peter Huestis, *Sales Manager*
Sandra Foster, *Administrative Assistant*
ADVERTISING
Lisa Wozmak, *Supervisor*
Robert D. Hannings, *Senior Account Manager*
Marion Carlson
Karen Cilley
Lyda Clark
Denise Proctor
ADVERTISING/PRODUCTION
Wai Chiu Li, *Quality Control Director*
Julie Nelson, *Advertising/Production Coordinator*
Linda J. Sweeney, *Advertising/Production Coordinator*

CIRCULATION
Gregory Spitzfaden, *Director*
Andrew Jackson, *Subscriptions Manager*
Cathy A. R. Drew, *Assistant Manager*
Laurie Seamans, *Assistant Manager*
Susan Boyd
Phil Dechert
Mary Emerson
Louise Menegus
Agnes E. Perry
Jennifer Price
James Bingham, *Single-Copy Sales Manager*
Linda Turner, *Assistant Manager*
Carol Aho
Claudette Carswell
Edson Ware

MARKETING COMMUNICATIONS
Horace T. Howland, *Director*
Vicki Reynolds, *Marketing Associate*
Priscilla Arnold, *Marketing Assistant*
Stephanie Warnesky, *Graphic Arts Supervisor*
Sharon Price, *Graphic Arts Designer*
Doug Webster, *Director of Public Relations*
Wilbur S. Watson, *Operations Manager, Exhibits*
Patricia Akerley, *Research Manager*
Cynthia Damato Sands, *Reader Service Coordinator*

ACCOUNTING
Daniel Rodrigues, *Business Manager/Controller*
Kenneth A. King, *Assistant Controller*
Vicki Weston, *Accounting Manager*
Linda Short, *D/P Manager*
Marilyn Haigh
Diane Henry
Vern Rockwell
JoAnn Walter

BUILDING SERVICES/TRAFFIC
Anthony Bennett, *Building Services Manager*
Brian Higgins
Mark Monkton

RECEPTIONIST
L. Ryan McCombs

PERSONNEL
Cheryl A. Hurd, *Office Manager*
Patricia Burke, *Personnel Coordinator*

BYTE BUSINESS PHONES
Gene Simpson, 603-924-9057
Pete Huestis, 603-924-6137
Horace Howland, 603-924-3424
Doug Webster, 603-924-9027
Brad Browne, 603-924-6616
Advertising, 603-924-6448
Circulation, 800-258-5485

Editorial and Business Office: 70 Main Street, Peterborough, New Hampshire 03458, (603) 924-9281.
West Coast Offices: McGraw-Hill, 425 Battery St., San Francisco, CA 94111, (415) 362-4600.
McGraw-Hill, 1000 Elwell Court, Palo Alto, CA 94303, (415) 964-0624.
New York Office: 1221 Avenue of the Americas, New York, NY 10020, (212) 512-2000.

Officers of McGraw-Hill Publications Company: President, John G. Wrede; Executive Vice Presidents: Paul F. McPherson, Operations; Walter D. Serwatka, Finance & Services; Senior Vice President-Editorial: Ralph R. Schulz; Senior Vice President Publishers: Harry L. Brown, David J. McGrath, James R. Pierce, Gene W. Simpson, John E. Slater; Vice President Publishers: Charlton H. Calhoun III, Richard H. Larsen, John W. Patten; Vice Presidents: Kemp Anderson, Business Systems Development; Shel F. Asen, Manufacturing; Peter J. Balestiero, Human Resources; John A. Bunyan, Electronic Information Services; George R. Elsinger, Circulation; Michael K. Hehir, Controller; Eric B. Herr, Planning and Development; H. John Sweger, Jr., Marketing.

Officers of the Corporation: Harold W. McGraw, Jr., Chairman; Joseph L. Dionne, President and Chief Executive Officer; Robert N. Landes, Senior Vice President and Secretary; Ralph J. Webb, Treasurer.

CROMEMCO COMPUTERS: DESIGNED TO MAKE UNIX SYSTEM V EVEN BETTER...

UNIX System V, the new standard in multi-user microcomputer operating systems, gives you high performance features along with the portability and flexibility of a standard.

Cromemco computers can make UNIX System V even better. Because our systems are designed with UNIX in mind. First of all, we offer UNIX System V with Berkeley enhancements. Then, our hardware uses advanced features like 64K of on-board cache memory and our high speed STDC controller to speed up disk operations – very important with UNIX.

More capability and expandability

We have a high-speed, 68000-based CPU that runs at 10 MHz, coupled with a memory manager that uses demand-paging and scatter loading to work *with* UNIX, not for it.

We provide room for expanding RAM to 16 megabytes – with error detection and correction – for running even the most sophisticated and advanced microcomputer programs. And the power to accommodate up to 16 users – all with plenty of memory.

But we give you even more.

A complete solution

We give you a choice in systems: the System 100 series, expandable up to 4 megabytes of RAM, and the System 300 series, expandable to 16 megabytes. A high speed 50 megabyte hard disk drive is standard on the systems. And you can expand the hard disk capacity up to 1200 megabytes using standard SMD drives. You can add floating point processing. High resolution graphics. Video digitizing and imaging. Communications through standard protocols. Mainframe interface.

And software support is here to meet your needs. We offer major programming languages, database management systems, communications software, including SNA architecture, X.25 protocol, and Ethernet; even a program to interface to an IBM PC if you need to. And, of course, access to the broad range of standard UNIX applications programs that is growing dramatically every day.

Easy to use.

We also make our systems easier to use, because we install the operating system before we ship your computer. No complicated installation procedures. And the Berkeley enhancements give you the standard UNIX System V operating system, but with the added convenience of these widely acclaimed improvements.

Cromemco's System 100 and System 300 computers: designed to be the highest performance UNIX systems available anywhere.

Just call or visit one of our UNIX System V Official System Centers to see for yourself. They'll also give you a copy of our new publication, "What you should know before you buy a UNIX system." Or contact us directly.

We'll be glad to show you how to get a better UNIX system.

Corporate Headquarters: Cromemco, Inc., 280 Bernardo Avenue, P.O. Box 7400, Mountain View, CA 94039. (415) 969-4710. In Europe: Cromemco GmbH, 6236 Eschborn 1, Frankfurter Str. 33-35, P.O. 5267, Frankfurt Main, Germany.



UNIX is a trademark of Bell Laboratories.
IBM is a trademark of International Business Machines Corp.

Cromemco®

Inquiry 90

E·D·I·T·O·R·I·A·L

Autonomous Weapons and Human Responsibility

The human desire to avoid responsibility for difficult decisions probably goes back to the dawn of time. In their brief period on this earth, computers have taken the blame for millions of human mistakes. Who hasn't heard a computer blamed for an error in billing or delivery? One typical case of blaming the computer occurred in a school system in which a computer handled scheduling of classes. On the first day of school, the most vocal complaints came from students whose lunch hours had been assigned at 8:30, 9:30, 10:30, 2:30, and 3:30. That's right—someone had forgotten to instruct the computer that lunch has to occur in the middle of the day. The school's new computer took the blame. Those who knew little about computers hated them more over this incident. Those in positions of authority found a versatile new scapegoat.

Anecdotes like this are amusing when little hangs in the balance. In the presidential debates in the fall, however, one of the candidates suggested that military decisions affecting the fate of the earth might be irrevocably delegated to computers if the other candidate's programs were enacted. The candidate making that claim either understood nothing of computers or else he was acting as a demagogue, casting himself as the hero to save the earth from the tyranny of computers. In either case, the candidate did his country a disservice.

Computers, of course, do as people tell them. The hard part is for people to foresee all circumstances and write instructions to handle all circumstances optimally. Lack of foresight and poor planning occur in many fields with or without computers. But computers make wonderful scapegoats. When foresight and planning fail, computers take the blame. Consequently their image as cold, dehumanizing villains is perpetuated. Some fictional and cinematic depictions of computers also endow them with a villainy that exceeds the capabilities of digital electronics.

To be sure, computers are cold and indifferent. But let's consider a few cases in which the inhuman properties of computers enable them to help people. Computer conferencing enables people to exchange text messages with others who share their interests. One advantage of computer conferencing is clear: people needn't be in the same place at the same time in order to exchange comments. But computer conferencing also prevents loud and aggressive people from dominating a group as they can in face-to-face conversation. As Starre Roxanne Hiltz and Murray Turoff point out in their book *The Network Nation: Human Communication via Computer* (Reading, MA: Addison-Wesley, 1978), ". . . persons who happen to be 'fast on the draw' in a face-to-face verbal situation, and who may not be particularly intelligent or correct, tend to dominate the discussion and decision-making process in small groups." In computer conferencing, "one participant making a statement in no way interferes with the ability of another person to be making a statement that overlaps in time." Computer conferencing for the BYTE staff has led to much better discussions with much broader and more balanced participation than occurs in face-to-face staff meetings. In fact, it has been a joy to see some shy people blossom in our computer-mediated meetings. Who would have supposed computers would emancipate the shy?

Some of the benefits that computers can bestow on humans are more obvious. In giving instructions to slow learners, computers persist when even the most saintly human instructors would lose patience. In providing simulations of difficult or dangerous situations, computers reduce the risks borne by people who must sometimes face the real hazards. If we use our electronic resources reasonably, bomb disposal will soon become the exclusive domain of robots. We can make computers serve human needs.

People who understand computers understand how these machines can serve people. But some people who understand computers well are letting us fall victim once again to the myth of computers as villains. The phrase that magically shifts blame from humans to computers is "autonomous weapons." The issue skirted is the same one dealt with so poorly in the presidential debates.

We can build unmanned tanks that detect certain kinds of objects and then destroy them. We can build and program computers to monitor motion and radiation and, upon detection of patterns that we have specified, to hurl devastation on targets that we have chosen. But using the phrase "autonomous weapons" confers on such devices a higher status than that of the glorified booby traps that they are. A concealed pit of sharpened stakes is just as autonomous a weapon as an unmanned tank. A terrorist's time bomb is just as autonomous a weapon as an orbital launching pad or beam weapon. But we have no doubt that the man who digs the pit and sharpens the stakes bears responsibility for killing the man who falls in, or that the man who builds and plants the time bomb murders its victims, even if the victims are not those intended.

Humans will build the coming generation of "autonomous" weapons. Humans will program them, and humans will either make, delegate, or blunder all decisions about their control. Humans will bear all the responsibility for the good or ill these weapons do.

This is not the place to argue the merits of such weapons or the likelihood of events that might justify the manufacture, deployment, or use of such weapons. But as one of the world's most widely read computer magazines, BYTE is the place to say that computers should never be the scapegoats for difficult human decisions affecting the fate of the earth. Computers follow sequences of human instructions. People decide. If we forget this, we may someday find ourselves speechless when we hear a leader explain a missing continent by saying, "The autonomous weapon was in a loop."

We must insist that individuals who decide to deploy autonomous weapons bear responsibility for everything these weapons do.

—*Phil Lemmons, Editor in Chief*

the closest thing to perfect is WordPerfect by SSI.

Reference Magazine

When it comes to software, nobody's perfect. But according to many of the experts, one word processing program is as close as you can get. No wonder it's called WordPerfect.

What are all the critics raving about?

Simplicity. Most WordPerfect functions require only one keystroke, a simple press of a finger. So you can concentrate on writing, not programming.

Speed. Because it is document-oriented instead of page-oriented, WordPerfect won't make you wait between pages. No matter how fast you type, WordPerfect won't slow you down.

> WordPerfect isn't flawless word processing software, but it comes very close.
>
> *Digital Review*

Features. From writers to doctors, accountants to lawyers, WordPerfect has built-in special functions to meet a wide variety of specific needs. And at SSI, every day is spent upgrading and improving WordPerfect — reaching for perfection.

Get your hands on the critics' choice, WordPerfect word processing from SSI.

> WordPerfect is my favorite because it is easy, simple and powerful. The people
>
> *List Magazine*

It's the closest thing to perfection.

For more information, see your dealer.

Or call or write:
SSI Software
288 West Center Street
Orem, Utah 84057
Information: (801) 224-4000
Order Desk: 1-800-321-4566,
Toll-free



SSI Software
Reaching for perfection.

Wordstar® Wordprocessing and SuperCalc 3™ Integrated Spreadsheet now included Free with all Seequa computers.

SEEQUA SHOWS YOU HOW TO GET AN IBM PC FOR JUST $1595.

BUY A CHAMELEON BY SEEQUA.



The Chameleon by Seequa does everything an IBM PC does. For about $1000 less than an IBM.

The Chameleon lets you run popular IBM software like Lotus® 1-2-3™ and dBase II.® It has a full 83 key keyboard just like an IBM. A disk drive like the IBM. And a bright 80 × 25 character screen just like an IBM.

But it's not just the Chameleon's similarities to the IBM that should interest you. Its advantages should, too. The Chameleon also has an 8 bit microprocessor that lets you run any of the thousands of CP/M-80® programs available. It comes complete with two of the best programs around, Perfect Writer™ and Perfect Calc.™ It's portable. And you can plug it in and start computing the moment you unwrap it.

So if you've been interested in an IBM personal computer, now you know where you can get one for $1595. Wherever they sell Chameleons.

The Chameleon by

SEEQUA COMPUTER CORPORATION
8305 Telegraph Road
Odenton, MD 21113

Chameleon shown with optional second disk drive.
To learn more about Seequa or for the location of the Seequa dealer nearest you, call (800) 638-6066 or (301) 672-3600.

IBM is a registered trademark of International Business Machines Corporation.

Inquiry 313

M·I·C·R·O·B·Y·T·E·S

Staff-written highlights of late developments in the microcomputer industry.

Optical Disks Move Toward Reality

Information Storage Inc., Colorado Springs, CO, expects to provide samples of its 525 WC optical-disk drive (write-once, read-often) in April, with full production later this year. The drive uses removable 100-megabyte 5¼-inch disk cartridges. ISI hopes to eventually sell the optical-disk drive to computer makers for about $600 and the disks for about $40 each. Initial prices will be much higher.

Compact Discs as Read-Only Memory for PCs

At the fall COMDEX show in Las Vegas, several companies announced products using a standard compact disc (CD) as a read-only-memory device for computers. Each CD ROM can store up to 550 megabytes of data (about 275,000 pages of text) using the same 4.72-inch disc format used in CD digital audio recordings. Philips Subsystems and Peripherals Inc., Hitachi America Ltd., Sony, and Denon America Inc. all announced or showed CD ROM drives at COMDEX. Earlier, 3M announced that it will produce discs for use in CD ROM drives. Sony and Denon both expect to sell drives to computer makers for less than $300; with a controller, a CD ROM should retail for substantially less than $1000.

New Chips Will Find Uses in Image Processing

NEC Electronics announced the μPD7281D, which it says is the first non–von Neumann single-chip image processor. The 7281 executes as many as 5 million instructions per second. Linking multiple 7281s further increases processing speeds. The chip can also be used for signal processing and mathematical calculations. NEC plans to produce samples of the chip late this year.

NCR announced the Geometric Arithmetic Parallel Processor (GAPP), developed jointly with Martin Marietta Aerospace. The GAPP includes a 6 by 12 array of 1-bit processor elements, each having 128 bits of RAM. Many GAPP chips can be cascaded for use in image processing. NCR suggests that robot vision, image compression and enhancement, digital signal processing, and arithmetic array processing are possible applications. NCR is selling samples of the NCR45CG72 GAPP for $545.

Portable Computers Feature 80 by 25 Displays

Mitsubishi's Tredia notebook computer includes an 80-line by 25-character LCD, 64K bytes of RAM, a Z80A processor, a microcassette drive, a 300-bps modem, serial and parallel ports, a bar-code-reader port, and a ROM cartridge slot. A 64K-byte ROM includes a spreadsheet, database, graphics, word processing, and communications software. Internal nicad batteries allow use of the machine for up to 8 hours. The $1200 Tredia weighs 6.6 pounds and measures 11¾ by 8½ by 3½ inches.

Quadram announced DataVue, a 14-pound portable computer with an infrared keyboard link. The $2195 system includes 128K bytes of RAM, one 5¼-inch disk drive, an 8088 processor, parallel and serial ports, a pivoting 80 by 25 LCD, an AC adapter, and batteries that will last about 1½ hours. It will be available in March.

Display Technology

Sony announced a new multicolor display technology called Currentron. The monitor alters the shade and color displayed by changing the beam current. Resulting colors include red, orange, yellow, and yellowish-green. Two versions will be available as engineering samples: one displays 900 by 200 pixels, and the other, 1100 by 864 dots. Monitors using the Currentron technology should be sharper but less expensive than full-color monitors.

(continued)

COMDEX: New 2400-bps Modems

Several companies introduced 2400-bps modems at the COMDEX show in Las Vegas. Most of the modems are compatible with the Bell 212A standard at 1200 bps, the Bell 103 standard at 300 bps, and the CCITT V.22bis standard at 2400 bps. Most also include auto-dial capabilities, some phone-number memory, and claim some degree of compatibility with Hayes "AT" modem commands. Some of the modems are stand-alone units; others are IBM PC expansion cards. Two use front-panel LCDs instead of the usual LEDs: Penril DataComm's $895 Datalinx Model 224 and Novation's $795 Professional 2400. Telenetics, Multi-Tech Systems, and Cermetek announced $795 modems; U.S. Robotics chose an $895 list price. Neither NEC America nor Microcom had set pricing for their 2400-bps modems.

Team Technology, Taiwan, introduced a line of low-cost modems, available through Chen Manufacturing, Alhambra, CA. The SmarTEAM 2400 features 2400-, 1200-, 600-, and 0–300-bps capabilities for $450; no availability date was set. The $159 SmarTEAM 103/212A is a 1200- and 0–300-bps modem. Team's ModemPhone 300 is a $37 300-bps modem.

Users May Find Surprises in Apple Insurance

Apple has endorsed a computer insurance policy offered by Emett & Chandler Inc., but neither Apple's letter nor the enclosed brochure explained that only one computer could be covered under a single policy. Since the application didn't require purchasers to list what non-Apple equipment they had—only its dollar value—some owners may not realize their non-Apple computers aren't covered.

NANOBYTES

Volition Systems, Del Mar, CA, is now shipping its $295 Modula-2 compiler for the Macintosh. . . . **Living Videotext**, Mountain View, CA, announced a $245 version of ThinkTank for the 512K-byte Macintosh. . . . **Advanced Micro Devices** introduced the Am29300 32-bit bipolar microprocessor family. Included are a 32-bit parallel multiplier, a floating-point processor, a microprogram sequencer, and an ALU. . . . **Digital Research Japan** will adapt CP/M, CP/M-86, Concurrent DOS, and other system software to run on **NEC**'s recently announced V series of 16-bit CMOS microprocessors. . . . **Sinclair Research** is developing a wafer-scale 512K-byte memory device. . . . **TT&T Corp.**, Hampton, NH, announced NH-Ada, a $225 subset Ada compiler for the IBM PC. . . . **AT&T** has published the "System V Interface Definition," which defines a minimum set of system calls and library routines that should be included in all operating systems based on its UNIX System V. . . . **Microsoft** is shipping Microsoft Networks 1.0 and MS-DOS 3.1, both of which add network capabilities to MS-DOS. . . . The **FCC** has authorized use of the TV vertical blanking interval for data transmission, which could mean software delivery by TV. The FCC had earlier cleared the way for broadcast of software over radio. . . . **Versatron Research**, Healdsburg, CA, introduced the $225 Footmouse, used to control cursor keys. . . . **Lotus Development** formally announced Jazz, its long-expected Macintosh product. The $595 program includes word-processing, spreadsheet, database, communications, and graphics functions but requires a 512K-byte Mac. Lotus also announced spelling-checker and text-outlining add-on products for Symphony. . . . **Tomcat Computer**, Los Angeles, CA, announced the Tomcat 3200-AT, which includes an 80286 processor, IBM PC AT-compatible expansion slots, 640K bytes of memory, one 1.2-megabyte floppy disk, a 20-megabyte hard disk, serial and parallel ports, and a color graphics card for $4529. . . . **Maxell** is ready to produce 5¼-inch floppy disks with a capacity of 6.5 megabytes for use in drives made by its parent company, Hitachi. Maxell showed two metal floppy disks: a 10-megabyte 5¼-inch disk and a 5-megabyte 3½-inch disk. Maxell also showed a 5¼-inch optical disk that stores 250 megabytes per side. . . . **Transtec Technology**, Dublin, Ireland, announced its Hydra PC, featuring 800- by 512-pixel graphics in four colors or, optionally, 16- or 4-color graphics with a resolution of 1024 by 1024 pixels. With a 1.2-megabyte floppy disk, a 10-megabyte hard disk, and 512K bytes of memory, the Hydra PC will cost $4900.

SQUEEZE MORE OUT OF EVERY ON-LINE MINUTE.



WITH NEW VIDTEX™ COMMUNICATIONS SOFTWARE FROM COMPUSERVE.

Presenting the software package that makes your computer more productive and cost-efficient.

CompuServe's new Vidtex™ is compatible with many personal computers sold today (including Apple,® Commodore® and Tandy/Radio Shack® brands). And it offers the following features*–and more–to let you communicate more economically with most time-sharing services (including CompuServe's Information Service).

Auto-Logon. Lets you log on to a host simply and quickly by utilizing prompts and responses defined by you. Also allows quick transmission of predefined responses to host application programs after logging on.

Function Keys. Let you consolidate long commands into single keystrokes. Definitions can be saved to and loaded from disk file, allowing multiple definitions for multiple applications.

Error-Free Uploading and Downloading. CompuServe "B" Protocol contained in Vidtex lets you transfer from your computer to CompuServe and from CompuServe to your computer anywhere in the country. Also provides error-free downloading from CompuServe's extensive software libraries.

Full Printer Support. Printer buffer automatically buffers characters until printer can process; automatically stops on-line transmission when full; and automatically resumes transmission when capacity is re-established. Also, lets you print contents of textual video screen or RAM buffer at any time.

Capture Buffer. Saves selected parts of a session. Contents can be written to a disk file; displayed both on and off line; loaded from disk; and transmitted to the host.

On-line Graphics. Integral graphics protocol displays stock charts, weather maps and more.

If you are already a CompuServe subscriber, you can order Vidtex on line by using the GO ORDER command. Otherwise, check with your nearest computer dealer; or to order direct, call or write:

Inquiry 68

CompuServe

P.O. Box 20212, 5000 Arlington Centre Blvd.
Columbus, Ohio 43220

1-800-848-8199
In Ohio, call 614-457-0802

An H&R Block Company

*Some versions of the Vidtex software do not implement all features listed.

Vidtex is a trademark of CompuServe, Incorporated. Apple is a trademark of Apple Computer, Inc. Commodore is a trademark of Commodore Business Machines. Radio Shack is a trademark of Tandy Corp.

Give people the tools they need, and there is no limit to what they achieve.

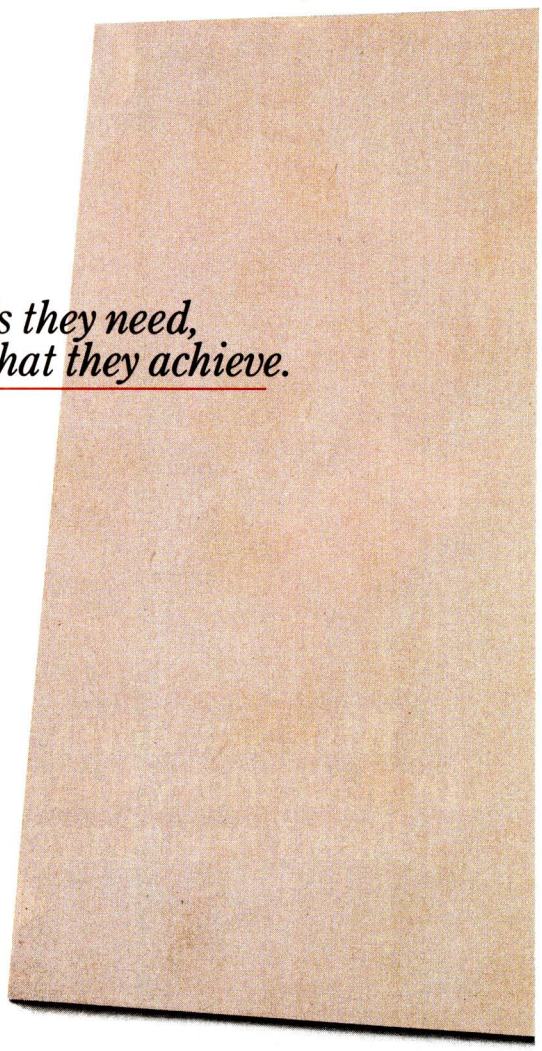

Announcing the first major breakthrough in word processing technology since WordStar.

Now, state-of-the-art comes easy.

Introducing WordStar 2000, a totally new word processing program from the makers of WordStar.

WordStar 2000 removes all limits from word processing. From what you can create. From what you can achieve.

Because WordStar 2000 lets you do everything.

Easily.

From windows, to undo, to spelling correction, WordStar 2000 does it all. And more.

WordStar 2000 gives you the works.

"Windows" allows you to work on different documents—simultaneously. "Undo" lets you replace text you mistakenly removed. A built-in spelling corrector checks and corrects misspellings from over 97% of the most commonly used words.

WordStar 2000 also has a "typewriter mode" to fill in forms or envelopes easily. Plus "format sheets," which give you ready-made headings, tabs and margins at the touch of one key. It can even create and update footnotes.

Finally, a truly integrated word processing system.

WordStar 2000 goes well beyond words.

It comes with a built-in five function calculator. A built-in mail merge enables you to mass produce form letters. Get our special Plus package and you also get a built-in mail list data base that allows you to create, update and sort your own mailing lists. Also a built-in indexer. Not to mention built-in telecommunications capabilities.

All integrated together, so you never have to leave the program.

The only word processing program that interacts with you on your level, whatever your level.

Before we created WordStar 2000, we studied the way people worked, and thought. We also drew from our experience with over 1,250,000 WordStar owners.

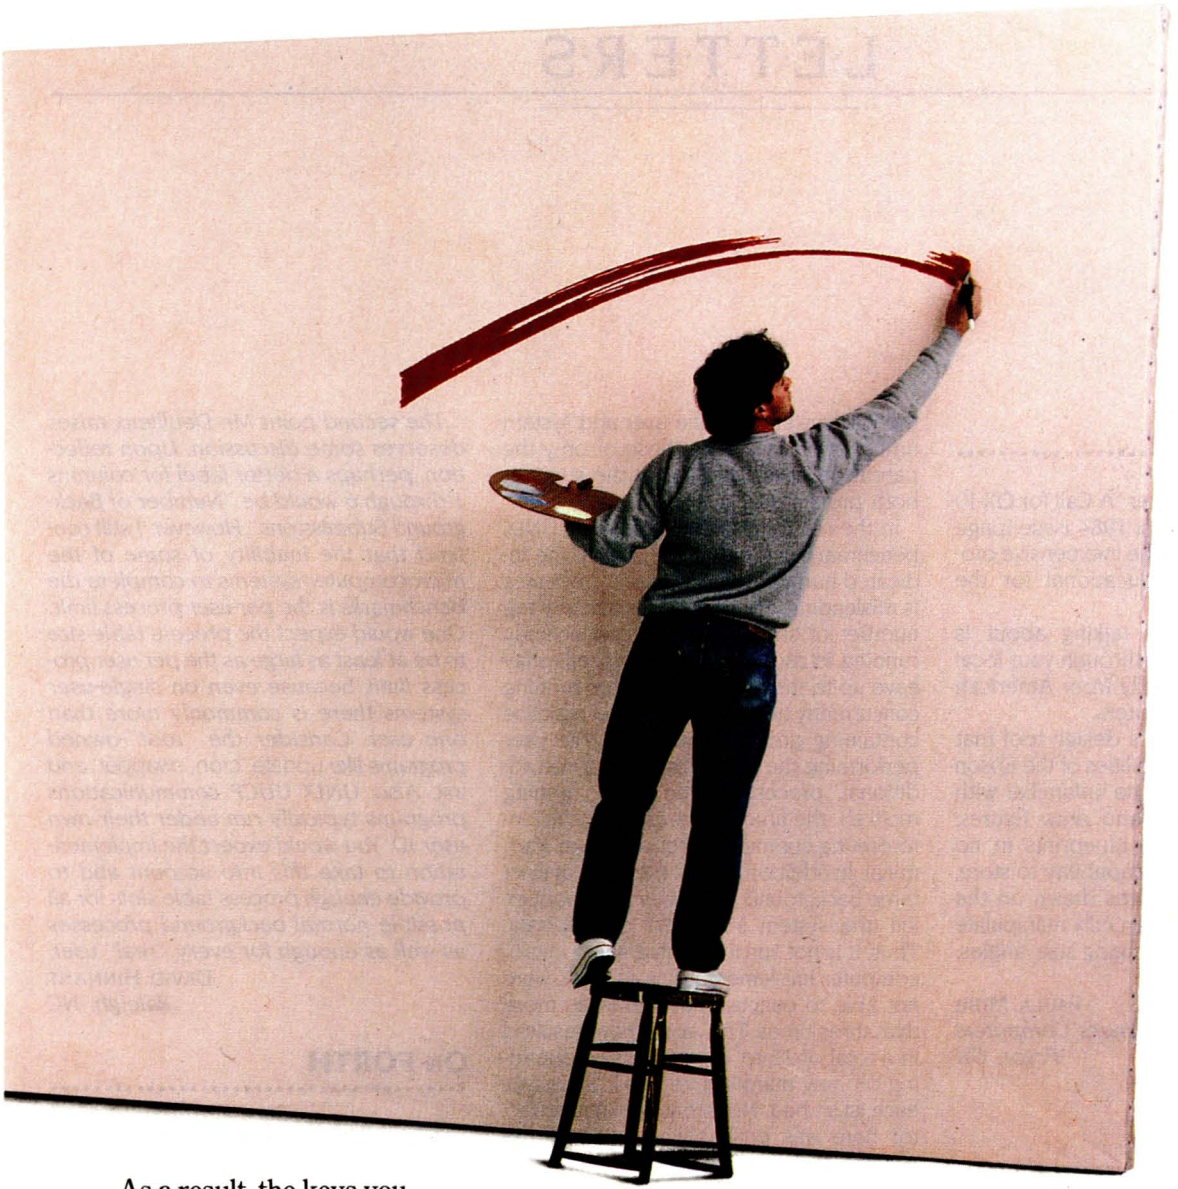

As a result, the keys you press are the keys you'd expect to press ("c" for copy, "p" for print, etc.). You may also use your computer's function keys. Menus have been uniquely designed for easy access to all functions. And MicroPro's exclusive "tutor-in-your-computer™" makes learning fast and fun.

WordStar 2000 is the easy word processing program you'll never outgrow. Of course, the original WordStar and WordStar for PCjr will continue to provide substantial and proven word processing capability for those with more modest budgets.

See your local MicroPro dealer today or call (800) 227-6703 [in CA (800) 632-7979] for the dealer nearest you.

So you can remove all limits from what you can achieve.

Current WordStar owners can upgrade to WordStar 2000 quickly and easily through their dealer, or by calling MicroPro Customer Update (800) 227-5609, 9am-3pm P.S.T.

WORDSTAR® 2000

Now there are no limits.™

MicroPro.

L·E·T·T·E·R·S

QXDraw

In reference to the letter "A Call for QX-10 Support" in the August 1984 issue (page 23)—there is at least one inexpensive program that is semi-educational for the Epson QX-10.

The program I am talking about is QXDraw. It is available through your local Epson dealer or directly from American Small Business Computers.

QXDraw is a graphics design tool that uses the graphics capabilities of the Epson QX-10. It allows someone unfamiliar with computers to design and draw figures, charts, schematics, or blueprints in no time. QXDraw has the capability to store, retrieve, and print figures drawn on the screen. In addition, it can fully manipulate figures and text by changing size, angles, and dimensions.

PAULA MIBB
American Small Business Computers
Pryor, OK

Benchmarking UNIX Systems

I have been using the UNIX operating system on various machines for several years. I am happy to see it gaining popularity in the microcomputer world. I enjoy reading the articles in your magazine on the C programming language and on anything dealing with UNIX, and I hope to see more in the future.

I found the article "Benchmarking UNIX Systems" by David F. Hinnant (August 1984, page 132) interesting and informative. However, I would like to bring to your attention a few errors I found in that article.

In the first benchmark (listing 1), the parent process should issue a wait system call after closing the pipe to wait for the child process to complete for two reasons. First, if the parent process terminates without waiting for the child process to complete, the reported elapsed (real) time may be too small, since the child process may continue reading from the pipe for a while after the parent has terminated. Second, unless the parent process issues the wait system call, the user and system times reported will be those of only the parent process, rather than the sums of both processes.

In the results of the multitasking UNIX benchmark (table 3 and figure 1), the indicated number of concurrent processes is misleading. This number is actually the number of shell processes concurrently running tst.sh. Each of these shells may have up to three child processes running concurrently (when executing the pipleline containing grep, tee, and wc). The user performing the benchmark has three additional processes: the shell running multi.sh, the time utility, and the shell interpreting commands from the user's terminal. In addition to this, there are at least three background processes: the swapper, init (the system initializer), and update. Thus, it is not surprising that some microcomputer implementations of UNIX were not able to concurrently run tst.sh more than three times. This would have resulted in a total of 12 to 18 processes, depending on how many active child processes each tst.sh had. Note that the limiting factor here was probably the size of the system's process table and not an arbitrary limit of processes per user, as Mr. Hinnant suggests.

GILBERT DETILLIEUX
Winnipeg, Manitoba, Canada

Mr. Detillieux's letter brought to my attention a typographical error I had not caught. When developing the benchmark programs, I used two sources for each benchmark; one with comments and one without. This was because I usually had to enter (or have someone else enter) the benchmark sources by hand, and an uncommented source listing is much easier to read. Unfortunately, the line

```
wait((int *)0);
```

must have been inadvertently deleted from the commented version of the sources that I furnished to BYTE in machine-readable form. That line should appear immediately after the line

```
printf("Error in parent closing \ n");
```

I regret the error and thank Mr. Detillieux for bringing it to my attention.

The second point Mr. Detillieux raises deserves some discussion. Upon reflection, perhaps a better label for columns 1 through 6 would be "Number of Background Submissions." However, I still contend that the inability of some of the microcomputer systems to complete the benchmarks is the per-user process limit. One would expect the process table size to be at least as large as the per-user process limit because even on single-user systems there is commonly more than one user. Consider the "root"-owned programs like update, cron, swapper, *and* init. *Also, UNIX UUCP communications programs typically run under their own user ID. You would expect the implementation to take this into account and to provide enough process table slots for all possible normal background processes as well as enough for every "real" user.*

DAVID HINNANT
Raleigh, NC

On FORTH

I believe the FORTH standards committee has a death wish because it continues to create new dialects with each "standard" it creates. I am concerned that readers will be turned off by FORTH when they read "FORTH-83: Evolution Continues" by C. Kevin McCabe (August 1984, page 137). A careful reader will realize that FORTH-83 is more revolution than evolution from FORTH-79.

If the FORTH standards committee used new names, new dialects would not have to be created. For example, the FORTH-83 DO LOOP and DO+LOOP are very dif-

(continued)

LETTERS POLICY: *To be considered for publication, a letter must be typed double-spaced on one side of the paper and must include your name and address. Comments and ideas should be expressed as clearly and concisely as possible. Listings and tables may be printed along with a letter if they are short and legible.*

Because BYTE *receives hundreds of letters each month, not all of them can be published. Letters will not be returned to authors. Generally, it takes four months from the time* BYTE *receives a letter until it is published.*

WHO SAYS "YOU CAN'T TAKE IT WITH YOU"?



When we at Intertec introduced our new HeadStart™ computer we said "it's the fastest, smallest, most powerful business computer in its class."

What more could we say?

How about "it's also portable."

Every HeadStart computer comes with its own easy-carrying handle. You can choose between a full size keyboard or a special compact version that snaps easily on the front of the screen. Either way, you get all the great features that make HeadStart unique. A big twelve inch screen, eight and sixteen bit processors, upgradable to one megabyte and it's networkable up to 255 users.

We named our new business computer "HeadStart" because that's exactly what it'll give you. And because it's also portable, you can take it anywhere.

Well, almost.

For more information call us at (803) 798-9100 or write: Intertec, Dept. "HeadStart," 2300 Broad River Road, Columbia, SC 29210.



intertec™

HeadStart Standard Features:

Size: 15.75" wide, 12.75" deep, 11.30" high.
Weight: 25 lbs.
Processors: Z80A (8 bit) and 8086 (16 bit).
Memory: 128K to 1MB depending on model. All models are expandable to 1MB.
Disk Storage: 500K to 1MB (unformatted) on a 3½" Micro-Disk. RAM disk feature emulates second system drive. Optional 3½" or 5¼" external drives.
Display: 12" (diagonal) P31 phosphor, non-glare screen, 25 lines x 80 or 132 columns.
Keyboard: Detachable with 104 total keys. A portable version snaps onto the front screen for easy transportability.
Disk Operating Software: *CP/M 80 for 8 bit. **MS DOS for 16 bit. LAN DOS for multi-user 8 or 16 bit operation. *Concurrent CP/M 86 optional.
Interfaces: One RS 449/RS 232 compatible serial port. One Centronics compatible parallel printer port. External data bus. Coaxial communications interface. External disk I/O interface. Optional network print spooling interface.
Networking: Up to 255 HeadStarts may be connected via a coaxial, multi-user network into one of 2 optional data storage systems.
Optional Data Storage Systems: Two models are available. A 10MB, 5¼" system is expandable to 20MB. A 50MB, 8" system (25MB fixed, 25MB removable) is expandable to 545MB in 165MB increments.

*CP/M 80 and Concurrent CP/M 86 are registered trademarks of Digital Research.
**MS DOS is a registered trademark of Microsoft.

A COMPUTER PROGRAM DELIVERED VIA SATELLITE!

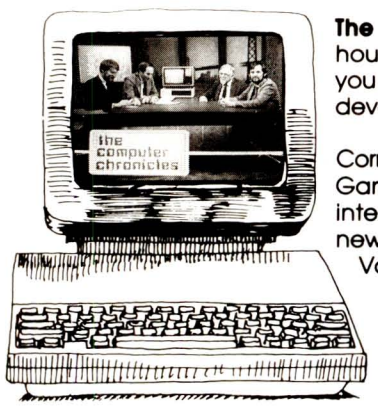

The Computer Chronicles, a half-hour weekly television series brings you an in-depth look at the latest developments in the computer world.

Correspondent Stewart Chefeit and Gary Kildall, creator of CP/M provide interviews with industry leaders plus news and information from Silicon Valley and around the world.

The Computer Chronicles, every week on a public television station near you.

(Check local listings for time and channel.)

Produced by KCSM, San Mateo, CA and WITF, Harrisburg, PA with funding from McGraw-Hill's BYTE and POPULAR COMPUTING magazines.

Mc Graw Hill

A · RESOLUTION · REVOLUTION !

S100 GRAPHICS · 8 COLOR · 1024 by 1024 Resolution · 1 BOARD

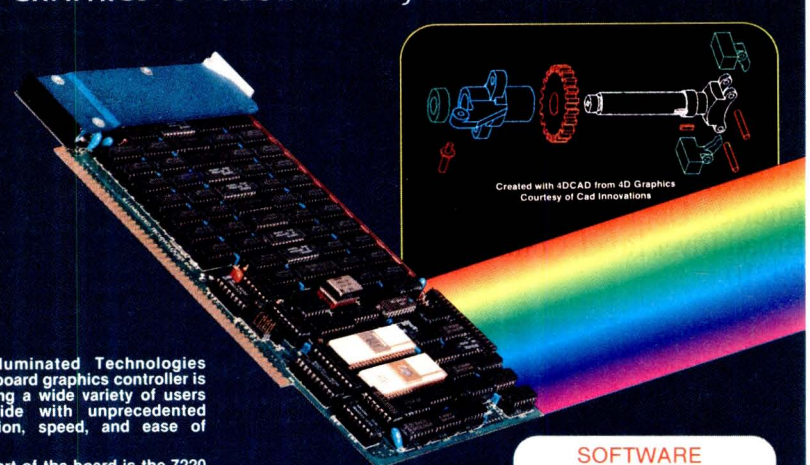

The Illuminated Technologies single board graphics controller is providing a wide variety of users worldwide with unprecedented resolution, speed, and ease of use.

The heart of the board is the 7220 graphics controller, a dedicated 16 bit microprocessor that implements Breshenhams algorithm directly in pipelined hardware, allowing vector and arc drawing speeds of 1.3 million pixels per second.

C language driver source for drawing and text application development are furnished.

- 3 million pixel display memory with 1024 by 1024, 1200 by 872, or movable window on image plane i.e. 640 by 480.
- Hardware zoom, pan, and windowing
- Up to 44 Mhz video rate
- Programmable sync, timing, resolution, and interface for any monochrome or RGB monitor

SOFTWARE
- AutoCAD 2 now available for S-100/8086
- Vgraph Tektronix 40xx emulator
- CP/M & MSDOS Console Support

Contact us for applications software currently available

ILLUMINATED TECHNOLOGIES INC.
3005 N. May • Oklahoma City, Oklahoma 73107
(405) 943-8086

DEALERS

CAD Innovations
Seattle, Washington
(206) 325-2300

Moms Computing
Sausalito, California
(415) 331-2043

ferent from the FORTH-78 DO LOOP and DO +LOOP. I would like to use both versions of FORTH and I would be able to if the FORTH-83 commands were DO83, LOOP83, and +LOOP83. More important, I would use the new keywords only when their new properties are relevant and I would continue to use the proven FORTH-78 keywords as before. In this way evolution can take place with a minimum of risk. (Note my use of FORTH-78; the FORTH-79 standard is incomplete and thus useless to me.)

As an experienced FORTH programmer, I find the changes from FORTH-78 listed in table 3 (on page 412) to be marginal and mostly unnecessary. For example, having / and /MOD leave floored quotients is a plus, but the FORTH-78 names create a dialect. The plus is overwhelmed by the dialect minus. If the standards committee had used the names /83 and /MOD83, you would be able to use all of the keywords without any dialect. Furthermore, implementations of the new keywords have not yet been fully evaluated; their practical consequences are not known.

I think the new definitions in FORTH-83 are not significant improvements over the old ones—additions to FORTH-78 would have made more sense.

I suggest that the FORTH standards committee address new areas such as graphics, mathematics, and databases in lieu of massaging yesterday to death.

NICHOLAS L. PAPPAS, PH.D.
Oakland, CA

ALTERNATIVES TO IN-SEARCH

As an information broker and consultant with 10 years of experience in searching various on-line information-retrieval systems, including Dialog, I would like to comment on the July BYTE West Coast, "Trends in Telecommunications" by John Markoff (page 341), especially the section subtitled "In-Search" (page 342).

In-Search purports to make it easier for both the novice and the experienced user of Dialog to interact with the system, but does it? On examination of the package it appeared to me that the introduction of this intermediary to the Dialog system would at most save the user only seconds of on-line connect time. The $399 that In-Search costs could be better spent on some other options available; for example, the Online Teaching and Practice

(continued)

Inquiry 410

Inquiry 262 ⟶

WHAT TO WARE WHILE BALANCING THE BOOKS.

Go ahead. Slip into something comfortable. Ware the most comfortable, most sophisticated microcomputer accounting software in the world. Open Systems. Accounting software so rich in features, it can handle the complex problems of today's small business with unprecedented ease. Software so flexible, it runs on all popular microcomputers. And can grow right along with your business needs.

No other accounting software line is so complete. With a choice of General Ledger, Accounts Receivable, Accounts Payable, Inventory, Payroll, Job Cost, Sales Order, Purchase Order and Fixed Assets as well as a Report Writer that links your accounting data to popular spreadsheets, word processors and graphics software. Assuring you the luxury of a perfect software fit.

The fact is, Open Systems meets the needs of today's small business so completely, it's become one of the best selling lines of accounting software on the market. More than 300,000 accounting products are providing comprehensive accounting solutions for businesses throughout the world. Now that's comforting. Call Open Systems right now. And get your mind off the books.

For the dealer nearest you call 1-800-328-2276

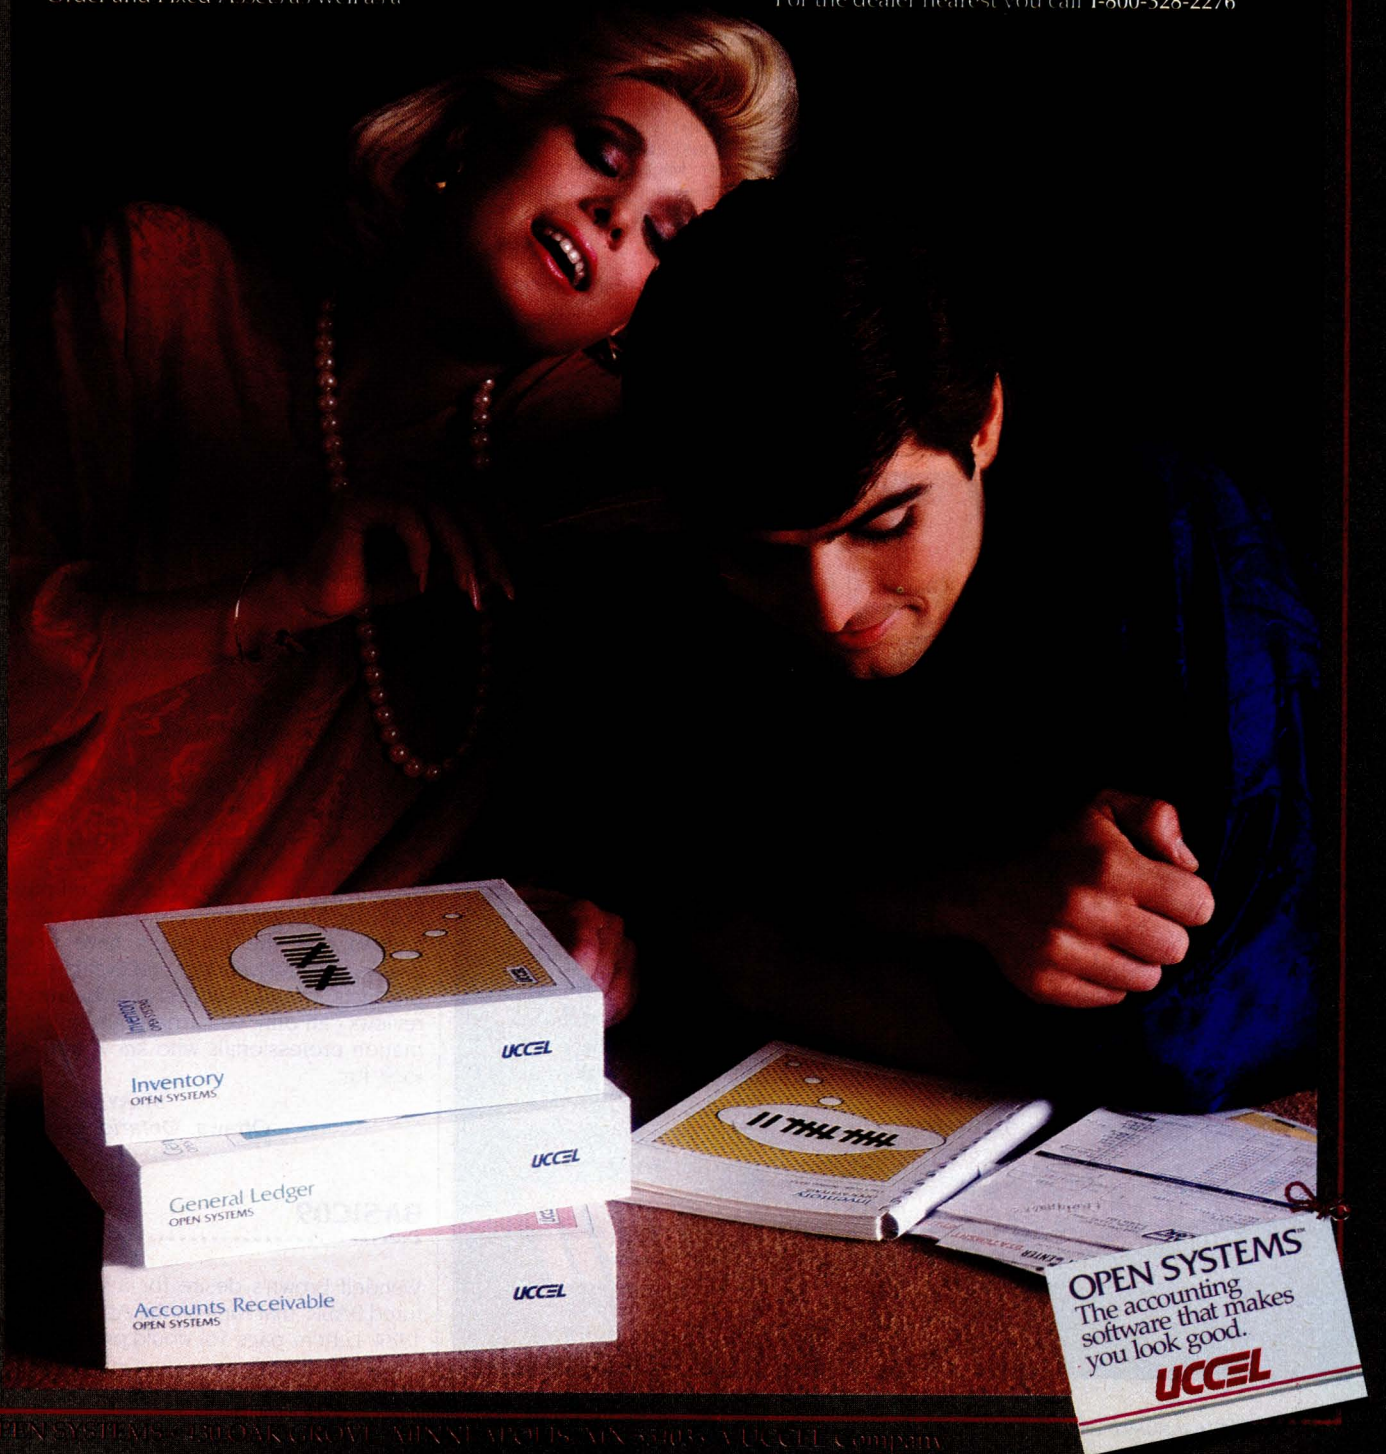

OPEN SYSTEMS • 1800 OAK GROVE • MINNEAPOLIS, MN 55403 • A UCCEL Company



TALK to your computer

It's as Simple as Saying "On" and "Off"

Plug in the new MICRO•EAR™ Voice Command System, and experience the incredible thrill of *talking with your personal computer.* Become virtually keyboard-independent, because your computer will now understand and obey your vocal commands.

Just Think of the Applications

Speak a single word or phrase and you: invoke functions . . . load and run programs . . . enter data . . . perform practically *any* keyboard operation.

You Select the Vocabulary — and Change It at Will

Input up to 256 words or short phrases *you* select, define, and train to your voice. MICRO•EAR achieves *95-98% recognition accuracy* . . . and retains its training even when turned off!

FREE Voice-Activated Software

You get demonstration software for the IBM™ PC and Apple™ II computers • voice-activated programs for a typewriter, a calculator, and voice-command video games • high quality microphone • plus communications software for the IBM PC and compatibles.

Software for the IBM PC includes EAR-DOS™, for concurrent voice/keyboard input capability while running applications software.

And because it plugs into a standard RS-232 interface port, you can use MICRO•EAR with just about *any* personal computer. MICRO•EAR Voice Command System — suggested price $579.00.

Act Now —

Call or write today for more information.

arctec systems

9104 Red Branch Rd. • Columbia, MD 21045 • (301) 730-1237

Micro•Ear and EAR-DOS are trademarks of Arctec Systems, Inc. Apple is the trademark of Apple Computer, Inc. IBM is the trademark of International Business Machines Corporation.



TOTAL CONTROL WITH LMI FORTH

***PC FORTH*™**

IBM PC & XT, HP-150, Macintosh, Apple II, CompuPro, Sage & CP/M-68K, Wang PC,

All CP/M and MSDOS computers.

Try the *professional language* offering the *utmost performance* in the *shortest development time.* Transport your applications between any of our enhanced 83-Standard compilers or expanded 32-bit versions. Choose from our wide selection of programming tools including native code compilers, cross-compilers, math coprocessor support, and B-Tree file managers. All fully supported with hotline, updates, and newsletters.

Laboratory Microsystems Incorporated

Post Office Box 10430, Marina del Rey, CA 90295

Phone credit card orders to (213) 306-7412

LETTERS

(ONTAP) files. These are subsections of several files available for $15 per connect hour, plus less than $10 per connect hour for telecommunications charges. Another option, popular with personal computer users, is a subscription to Knowledge Index, a subset of the complete Dialog files, available after 6 p.m. on weekdays and on weekends for $24 per hour, all inclusive.

Therefore, for the price of the In-Search package, you can have about 15 hours of search time. Since a typical search should take less than 10 minutes, this translates into a lot of searches. As well, to use the In-Search package you have to learn more key functions and commands, all of which are no less complicated than the few Dialog commands you have to learn to use the database. With or without the In-Search package you still must learn and understand the concepts of Boolean logic and search building.

One of the beauties of Dialog is that it is available throughout the world for a good portion of each week. Once you have learned some simple commands and concepts, made more mnemonic and user friendly in Knowledge Index, you can search the system wherever you happen to be and with whatever equipment is available. How unfortunate then, to introduce the In-Search crutch if you cannot operate Dialog without it.

In addition, there are other telecommunications software packages that are cheaper and are not tied to a particular information-retrieval system but that, nevertheless, allow downloading and editing of results.

In conclusion, I believe that this package is indeed an example of patronizing the naive user and never giving him a chance to grow up. Currently In-Search and similar tools are being reviewed by several publications. It is evident from reading these reviews that the reviewers have been unable to intensively test and evaluate the products. I would suggest that balanced reviews can only be carried out by information professionals who know what to look for.

MARY M. NASH
Ottawa, Ontario, Canada

BASIC09

Wendell Brown's desire for a well-structured BASIC that runs on the Apple II (July 1984 Letters, page 16) would probably be

(continued)

And you thought there was only one "Graphics Card."

AST introduces Preview!™ for $100 Less.

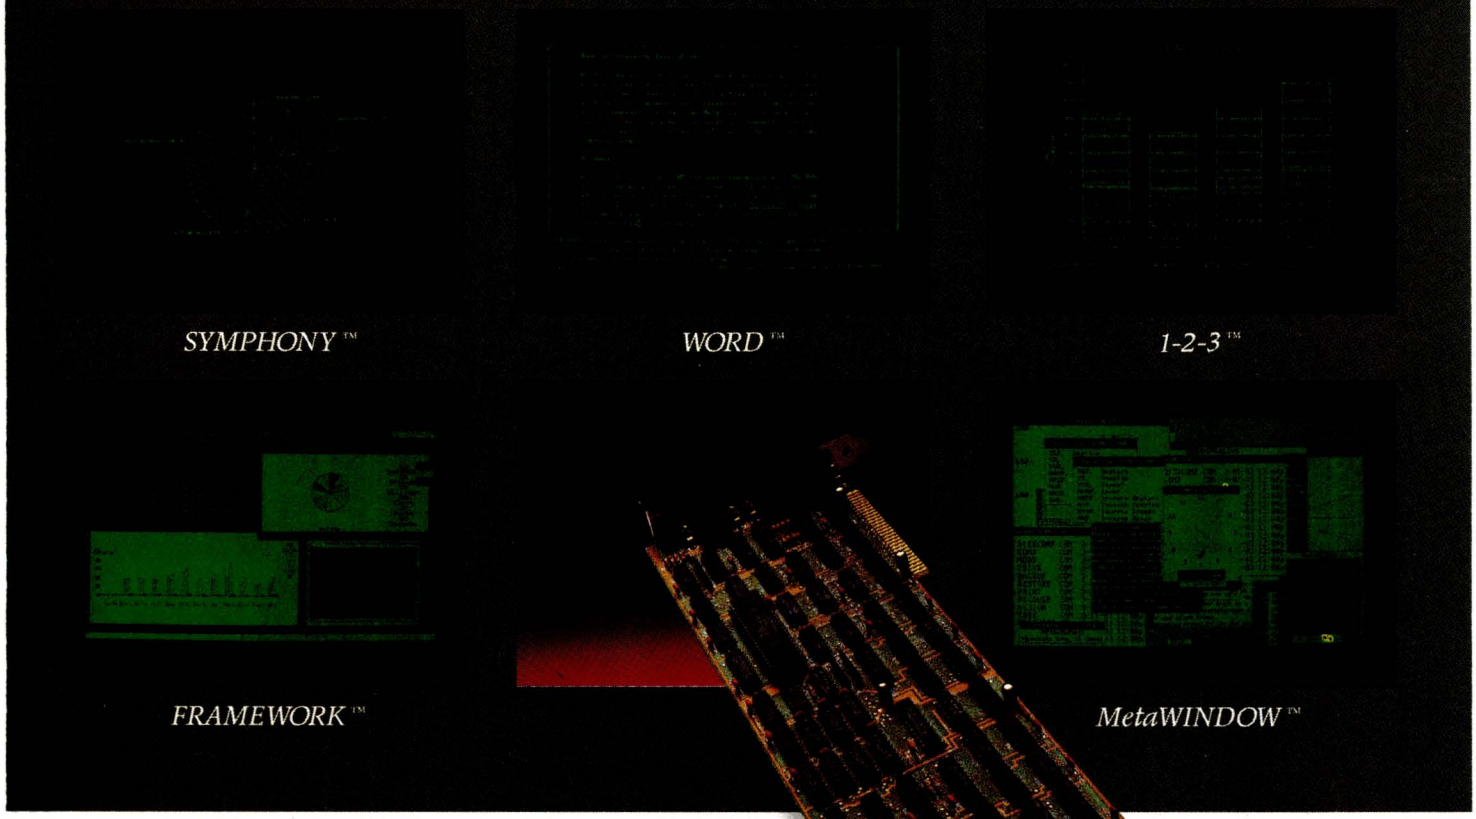

Now you have a choice for bit-mapped graphics. Priced at $399—$100 less than what you'd expect—AST's Preview! brings high resolution bit-mapped graphics and clear, crisp text to your IBM® PC, XT or AT monochrome screen. And there's no standard like AST quality.

Preview! provides all the features and functions you'd expect, like bit-map addressing the maximum supported 720 horizontal pixels by 348 vertical lines for two pages of full-screen high resolution graphics, an IBM PC-compatible parallel printer port and Hercules™ bit-mapped graphics card compatibility.

It works with all kinds of software too, no other card offers more. New generation integrated business programs, bit-mapped text processing and advanced windowing applications are specialties.

Then there's the nonstandard features AST is famous for—consistent quality, reliability, comprehensive documentation, service, support and extra value. We include our SuperPak™ RAM disk simulator and printer spooler utility diskette. Judged by PC WORLD readers as a World Class Winner for the past two years, it's worth $45 by itself.

The leadership strength that makes our consistent quality so affordable is carried throughout our complete line of PC enhancement products. We offer a family of graphics products which provide a variety of features from serial ports to expansion memory, as well as multifunction boards, micro-to-mainframe communications, local area networks and disk subsystems.

So you can settle for the common, ordinary graphics card and hope for the best. Or you can pay $100 less and know you have the best—Preview! only from AST. For more information and dealer locations call our Customer Information Center (714) 863-1333, Ext. 5249. Or write, AST Research, Inc., 2121 Alton Avenue, Irvine, CA 92714 TWX: 753699AST UR.

FEATURES

- *64K Screen Memory*
- *Two Pages of High Resolution 720 Horizontal PELS by 348 Vertical Line Bit-Mapped Monochrome Graphics*
- *80 Character By 25 Line IBM PC-Compatible Text Display*
- *Standard IBM Character Set*
- *Compatible With Popular Bit-Mapped Graphics, Text and Windowing Applications Software*
- *Parallel Printer Port*
- *SuperPak Utility Diskette*
- *Hercules Compatible*

Preview! and SuperPak trademarks of AST Research, Inc. IBM trademark of International Business Machines Corp. Hercules Graphics Card trademark of Hercules Computer Technology. Lotus 1-2-3 and Symphony trademarks of Lotus Development Corp. Framework trademark of Ashton-Tate. Word trademark of Microsoft, Inc. MetaWINDOW trademark of Metagraphis.



AST RESEARCH INC.

Inquiry 3 for Dealers. Inquiry 4 for End-Users.

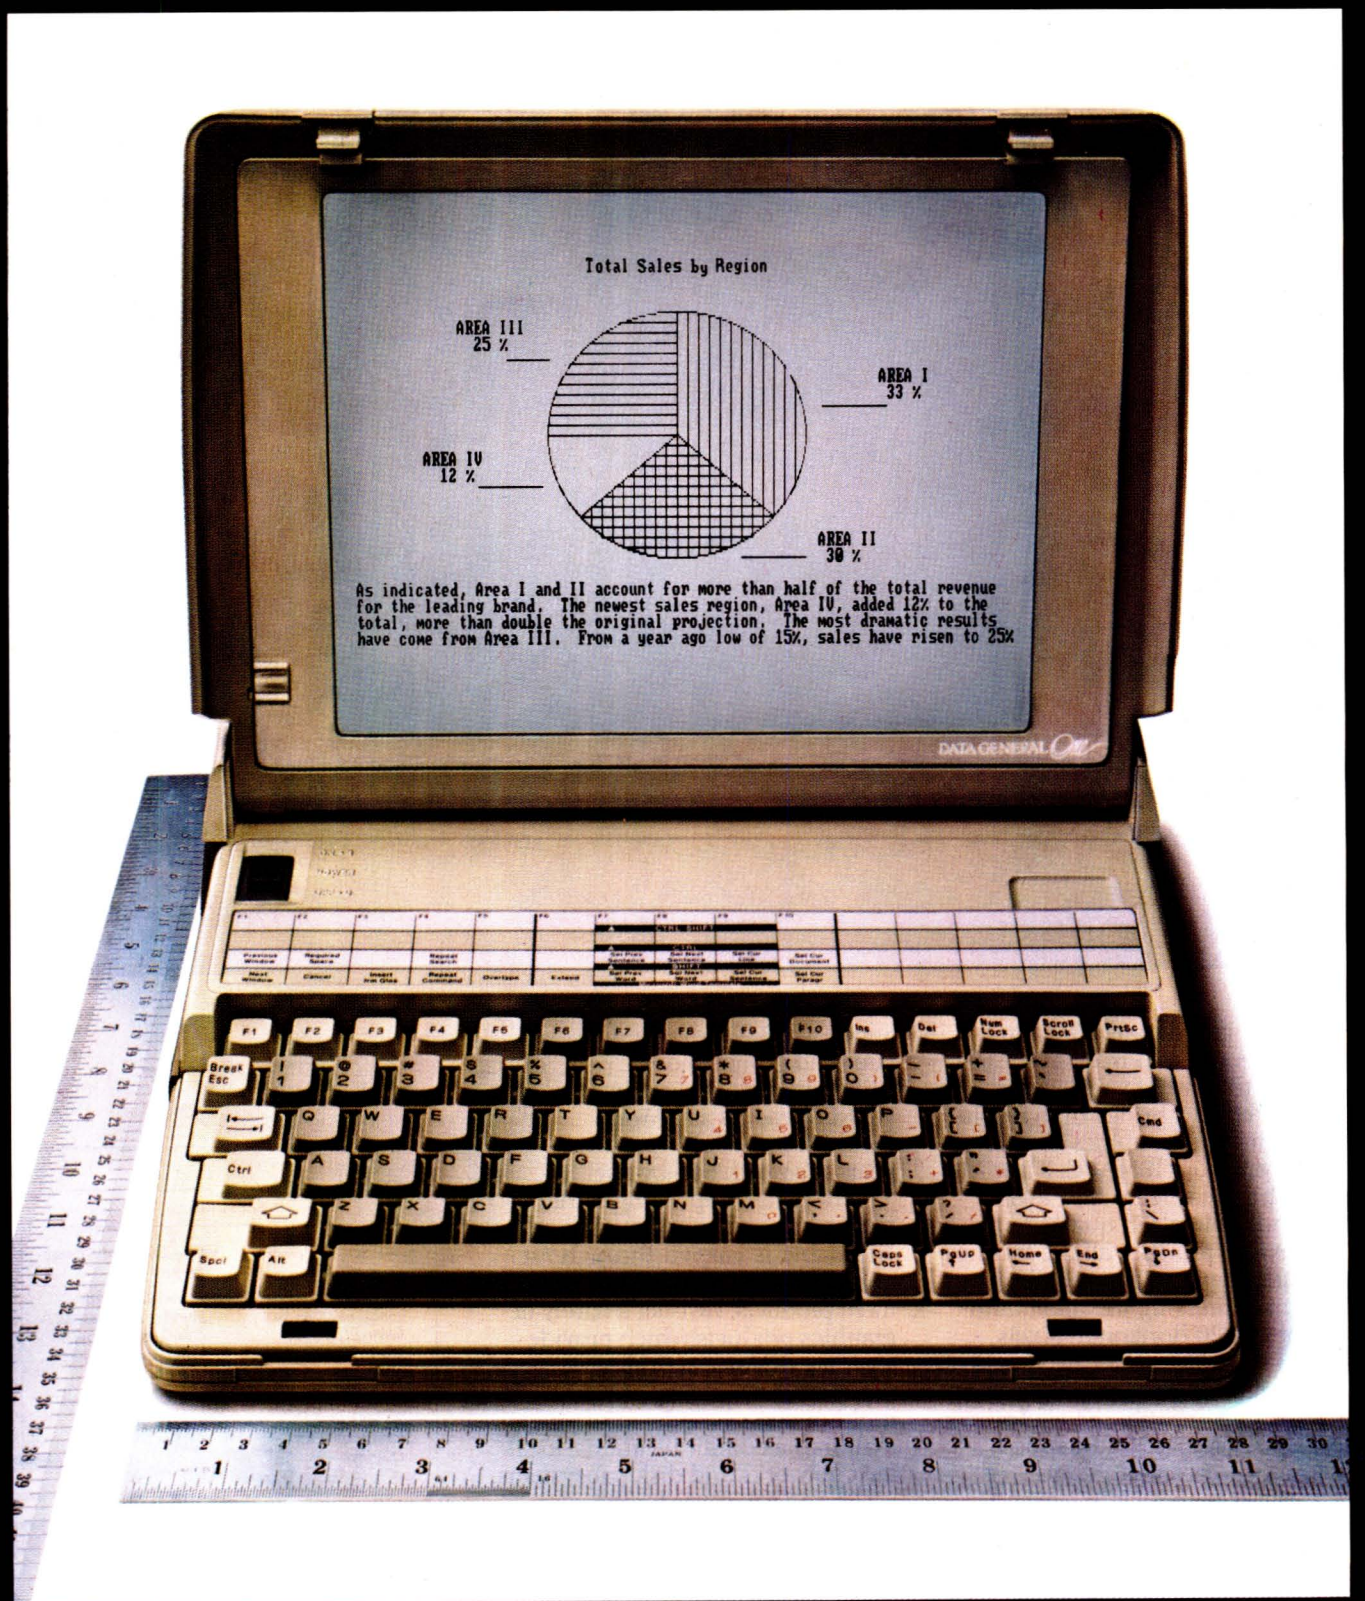
Total Sales by Region
AREA III
25 %
AREA I
33 %
AREA IV
12 %
AREA II
30 %
As indicated, Area I and II account for more than half of the total revenue for the leading brand. The newest sales region, Area IV, added 12% to the total, more than double the original projection. The most dramatic results have come from Area III. From a year ago low of 15%, sales have risen to 25%
DATA GENERAL One

INTRODUCING THE STANDARD BY WHICH EVERY OTHER PC WILL BE MEASURED:

THE DATA GENERAL/One™ PORTABLE.



Fits in a briefcase.

Free yourself from the confinement of your deskbound computer, with the first full-function business system that lets you work anywhere.

The DATA GENERAL/One portable offers the capability of the leading PC: two built-in diskette drives, a full-size screen and full-size characters, even the same programs.

In a size small enough to fit in a briefcase: 11.7 x 13.7 x 2.8 inches, and less than 11 pounds.

It's the only portable with a full-size 80-column by 25-line screen.

It's compatible with IBM®-PC software, so you can run the programs available to PC users. Software like 1-2-3™ and Symphony™ from Lotus™, Wordstar®, dBase II®, Multiplan®, pfs® file, and Flight Simulator II.

It's the only portable with two built-in 720 KB diskette drives, giving you twice the storage capacity of the leading PC. And memory is expandable up to 512 KB.

Finally, it's the only portable to offer the benefits of integrated office automation—by connecting with Data General's CEO® system.

Options include a built-in modem, a portable printer, an 8-hour battery pack, an external 5.25-inch diskette drive, and an external 1200-baud modem.



Connects with Data General's CEO office automation system.

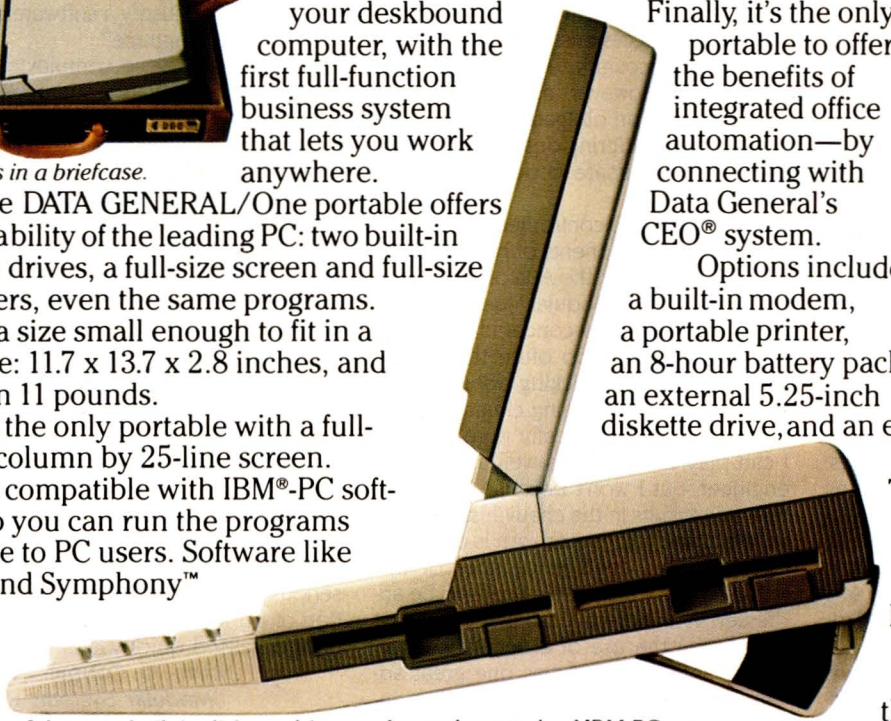

It has two built-in diskette drives and runs thousands of IBM-PC programs.

The DATA GENERAL/One. It gives you what the leading PC gives you. And something the leading PC doesn't.

Your freedom.

Find out more about the DATA GENERAL/One portable by contacting your Data General salesperson or nearest authorized dealer.

Call 1-800-DATAGEN.

Data General
a Generation ahead.

IBM is a registered trademark of International Business Machines Corporation. 1-2-3, Lotus and Symphony are trademarks of Lotus Development Corp. © 1983. dBase II is a registered trademark of Ashton-Tate. pfs is a registered trademark of Software Publishing. Wordstar is a U.S. registered trademark of Micro Pro Int'l. Multiplan is a U.S. registered trademark of Microsoft Corp. CEO is a registered trademark, and DATA GENERAL/One is a trademark of Data General Corp. © 1984 Data General Corporation, Westboro, MA

satisifed by BASIC09, which runs under the OS9 operating system and therefore requires a 6809 card. The card and software are available from: Stellation Two, POB 2342, Santa Barbara, CA 93120.

BASIC09 features IF. . .THEN. . .(ELSE) . . .ENDIF, REPEAT. . .UNTIL, WHILE. . . DO. . .ENDWHILE, LOOP. . .ENDLOOP, EXITIF. . .THEN. . .ENDEXIT, and FOR . . .TO. . .(STEP). . .NEXT control structures. IF. . .THEN. . .ELSE statements can be nested. The language compiles to an intermediate code, which is then interpreted, and, unlike CBASIC, the compiler/decompiler is interactive and flags most errors immediately.

Stellation Two provides excellent support and has a reasonable update policy.

F. KUECHMANN
Vancouver, WA

MODULA-2: TWO DISSENTING VIEWS

David B. Moffat's "UCSD Pascal vs. Modula-2: A Dissenting View" (August 1984, page 428) was a pleasure to read—a sort of the-emperor-isn't-wearing-any-clothes type of critique. I agree with Mr. Moffat's objections to separate input/output statements for every variable type and to the case sensitivity of the language. The language has one other feature that in my opinion is a nuisance—the required use of IMPORT statements to specify the libraries in which modules exist. Not only do you have to know the names, purposes, and acceptable arguments of procedures that are usually considered "standard," but you also have to know where those modules are located in order to be able to call them into a program. This is the sort of bookkeeping task that higher-level languages were invented to avoid.

As an application programmer I fail to see how Modula-2 is an advance in meeting my programming needs. I am far happier with Turbo Pascal, which lets me set up libraries (though not precompiled) that are easily called into programs with an INCLUDE compiler command.

Turbo Pascal is case-insensitive and provides convenient low-level capabilities for bit manipulation and direct access to memory and MS-DOS interrupts.

Perhaps systems programmers, for whom Modula-2 was developed, can appreciate the virtues of that language—but I do not think that Modula-2 is a superior applications language. Every time I read one of Jerry Pournelle's glowing comments about Modula-2, I react with the question: But has he tried programming in that language?

JOHN FIGUERAS
Victor, NY

After reading the articles concerning Modula-2 in the August 1984 BYTE, I feel compelled to comment. On the whole, I thought the articles were well written and gave a good overview of the language. However, I believe that I detected a certain amount of chauvinism on the part of those committed to Modula-2, and it is this point I would like to address.

Engineers have a tendency to fall in love with certain designs, and software engineers are no exception. We put so much time and energy into the designs we work with that it is as if we become married to them and can no longer look at them with objectivity. I know I have been guilty of this on many occasions, and I am sure that others can recognize this capacity in themselves. However, as software engineers we have an obligation to be objective when considering designs and to address any legitimate concerns that are raised.

Currently we are confronted with debate between the proponents of both Modula-2 and Ada. Being in the Ada camp, I would like to have the Modula-2 devotees address my legitimate concerns regarding this language. All too often the debate degenerates to nit-picking about this or that feature of Ada being clumsy or inefficient or not theoretically pure enough. I can play this game as well as the next engineer, but I won't because I feel that this only results in the chauvinism I speak of. My single largest concern is one I feel is carefully avoided in debates of this nature, and it desperately needs to be addressed in an objective manner by anyone advocating the use of a new language.

Ada, as a language, has one great advantage over all others. It is rigidly standardized and the standard can be effectively enforced. While it may have many serious drawbacks, which opponents are quick to point out, lack of standardization is not one of them. Even a poor standard, enforced by the entire might of the Department of Defense, is infinitely superior to no standard at all. My question to the Modula-2 people is how do they propose to ensure that a software commitment on one machine using one compiler can be salvaged when migrating to another machine with a different compiler? An ANSI standard alone, should one be produced, is not always enough.

I own a company that has committed itself to software development in Ada. We believe that our success will hinge on our ability to generate software that is reliable, reusable, and above all else, transportable. Reliability is dependent only on our abilities as software engineers and the quality of the tools we select. Reusability is provided in both Modula-2 and Ada through their ability to generate libraries of general-purpose utility routines. However, only Ada provides a language reference manual so precise and detailed that it has spawned a new generation of "language lawyers," a trademarked name that guarantees the DOD the ability to enforce the standards laid down in this manual, and a validation procedure that will test every Ada compiler against the standard before it can bear the name. What does Modula-2 offer me in this respect as a businessman to justify a software commitment to this language?

Ada has some flaws: complexity, lack of certain theoretical advantages, the massive size of its associated compilers, and others. But because we have an effective standard to work with, I feel that we can produce software at a lower cost to our clients. The logic is simple: if we stay within the standard, and if our clients have a validated Ada compiler, any software written on our system should run on their system. We spend less time making patchwork fixes and adjustments, and we can bring in software tools developed on other projects without fear of needing to modify the tools.

Modula-2 is a good language. It incorporates some of the best developments in the field of theoretical computer science to come along in recent years. However, I think that it will have some serious problems in the future if the question of portability and standardization is not addressed quickly.

MARIN D. CONDIC, PRESIDENT
Modular Systems Research
Kalamazoo, MI

CALTECH'S COMPUTER NETWORK

The article "A Computer on Every Desk" by Donna Osgood (June 1984, page 162) was interesting but failed to mention the educational computing activities at the California Institute of Technology (Caltech). I feel our program has several unique features. A fully functioning campus-wide network links all our computers. The network was completed this summer by a team of Caltech students that installed

outlets in the dormitories. The following description of our program is excerpted from the June 1984 edition of *Caltech News*.

> Caltech has received major grants from IBM and from Hewlett-Packard to support its educational computing project.
>
> From IBM, Caltech will receive several hundred IBM Personal Computer workstations, a hostprocessor, several graphics subsystems, and technical support, all to be used in the development of educational software.
>
> From Hewlett-Packard, Caltech will be recipient of 22 color desktop computers and support equipment for an introductory computing course, an introductory solid-state electronics course, and a solid-state electronics laboratory. In the first course, freshmen will use the Hewlett-Packard computers to learn programming, and in the last two, undergraduates will use the computers to design electronic devices. The equipment is worth $528,694.
>
> Along with the IBM equipment will come a cash grant of $150,000 to purchase adapter cards to tie the IBM workstations to Caltech's campus-wide high-speed computer network. IBM has also assigned a technical support person to the project during the three years that the company is involved. . . .
>
> When it is fully implemented over the next three years. . . . [the] Caltech educational computing project will include more than 800 workstations. Linked by the campus computer network, they will be grouped in clusters of up to 10 or 20 machines in classroom areas, laboratories, the computing center, and libraries.
>
> Faculty and teaching assistants will have individual workstations to prepare courseware. Students will have network outlets in their dormitories, enabling them to communicate with the campus system, using their personal computers. All the individual units will be tied to campus mainframe computers. . . .
>
> The Caltech project is aimed primarily at developing courseware for all the disciplines at the Institute. Educators will emphasize creation of specialized graphics software that will enable students to "see" abstract concepts in visual terms. . . .
>
> Besides IBM and Hewlett-Packard, other manufacturers contributing to the project include Data General, Digital Equipment Corporation, Evans & Sutherland, and Tektronix.

HOWARD RUMSEY JR., PH.D.
California Institute of Technology
Pasadena, CA

SCOUT

I would like to tell BYTE readers about an IBM PC XT product that has saved me a great deal of time, money, and frustration

(continued)

BAY TECH'S MULTIPORT-FOLIO

YOUR BEST SOURCE FOR HIGH QUALITY, HIGH PERFORMANCE, DATA COMMUNICATIONS PRODUCTS

PORT CONTENTION

Adds terminals to your computer. For example: 12 terminals can contend for 6 ports on a first come, first serve basis.

PORT NETWORKING

Star network capable of any port-to-port connection with up to 18 ports communicating simultaneously.

PRINTER SHARING

Enables up to 8 computers to automatically share a single printer.

PORT MULTIPLEXING

Allows up to 8 computers to use the same data communication line simultaneously.

Multiport models with 5 to 18 ports, $279 to $1,750.

PORT SWITCHING

Expands your single RS232C serial port to 4 or 8 ports. Even more ports by cascading.

BAY TECHNICAL ASSOCIATES
P. O. BOX 387
BAY ST. LOUIS, MS 39520

CALL US TOLL-FREE
1-800-523-2702

Telex: 910-333-1618 (BAYTECH)
EasyLink: 6277-1271



Inquiry 39

over the past four months. Scout, a Computer Insights product, provides a set of functions that greatly enhance those provided by DOS 2.X for using subdirectories.

Scout allows you to define "imaginary drives." These drives model DOS 1.X disk directories and allow programs that do not understand DOS 2.X paths to access files in subdirectories. This makes many older programs usable and will save you money by eliminating the need to buy new DOS 2.X versions. The "imaginary drives" can be defined as read-only and provide protection of valuable data. Scout can be used to prevent catastrophes such as your accidentally formatting your hard disk.

Although these capabilities are useful, Scout's greatest asset is its ability to search subdirectories for data, profile, help, overlay, etc., files in a manner similar to, but more flexible than, the DOS 2.X PATH command. This saves a great deal of disk space because it lets you maintain only one copy of files used by programs run in many different subdirectories.

I have yet to find a bug in Scout. I recommend this product to anyone who uses DOS 2.X, especially if you think subdirectories are a good idea and ought to be more useful than they currently are.

If you're interested, you can obtain Scout from Computer Insights, POB 110097, Pittsburgh, PA 15232.

PAUL CRUMLEY
Monroeville, PA

What do you get when you cross 1200 baud, free on-line time, and extra features at a price Hayes can't match?

MultiModem.

Data Rate?
The MultiModem gives you a choice—either 1200 or 300 bits per second. So you can go on-line with the information utilities. Check out bulletin boards. Dial into corporate mainframes. Swap files with friends.

On-Line Time?
With the MultiModem you get CompuServe's DemoPak, a free two-hour demonstration of their service, and up to seven more free hours if you subscribe. You also get a $50 credit towards NewsNet's business newsletter service.

Features & Price?
Of course, the MultiModem gives you automatic dial, answer, and disconnect. Gives you the Hayes-compatibility you need to support popular communications software programs like Crosstalk, Data Capture, our own MultiCom PC, and dozens of others. Gives you a two-year warranty, tops in the industry.

But Better?
Yes. The MultiModem gives you features the Hayes Smartmodem 1200™ can't match. Features like dial-tone and busy-signal detection for more accurate dialing and redialing. Like a battery-backed memory for six phone numbers. All at a retail price of just $549—compared to $699 for the Smartmodem.

What do you get? The new MultiModem, from Multi-Tech Systems. Isn't this the answer you've been looking for?

For the name of your local distributor, write **Multi-Tech Systems, Inc.**, 82 Second Avenue S.E., New Brighton, MN 55112. Or call us at (612) 631-3550.



MultiTech Systems

The right answer every time.

Inquiry 248

Trademarks—*MultiModem, MultiCom PC: Multi-Tech Systems, Inc.—CompuServe: CompuServe Information Services, an H & R Block company—NewsNet: NewsNet, Inc.—Crosstalk: Microstuf, Inc.—Data Capture: Southeastern Software—Smartmodem: Hayes Microcomputer Products, Inc.*

"GOOD-BYE, TEACHER . . ." EXPLAINED

Stephan L. Chorover recently referred to me in "Cautions on Computers in Education" (June 1984, page 223) as

> . . .a behavioristically inclined psychologist who was one of the leading developers of an earlier system of automated instruction inspired by the work of B. F. Skinner. The so-called "Keller Plan" is one of the old theories that has died along with many other well-intended measures for increasing educational productivity through automation.

In the interest of veracity it should be noted that personalized instruction, to which Mr. Chorover refers, is not a theory, but a teaching method; the method is alive and well and is a frequently used alternative to the group-instruction-by-lecture method; personalized instruction has nothing whatever to do with automation (as Mr. Chorover would know if he had read the paper "Good-bye, Teacher. . ." to which he makes a reference); and it was inspired by, but not modeled after, B. F. Skinner's work on individualized instruction, for which we were all grateful. I am not just "behavioristically inclined;" I am a behaviorist and have been one for more than 50 years.

FRED S. KELLER
Chapel Hill, NC

ONE READER'S "PERFECT" MICROCOMPUTER

In regard to Richard Knop's concept of the perfect microcomputer (July 1984 Letters, page 26): The Olivetti M-20 computer uses the Z8000 microprocessor and meets

(continued)

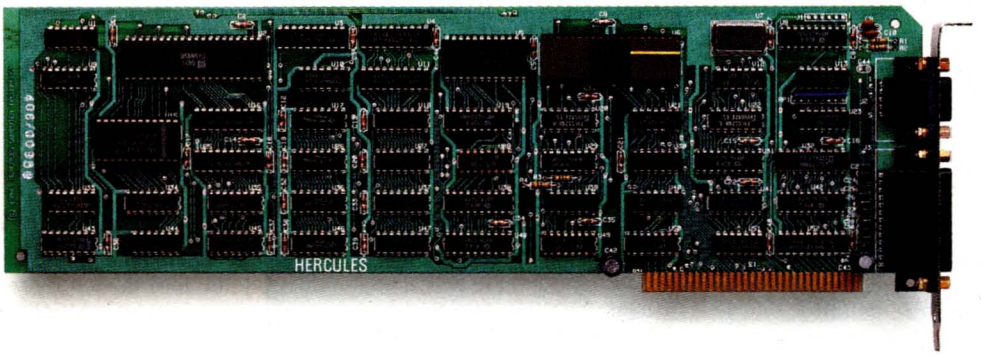

Introducing the Hercules™ Graphics Card for the technical user.

OK. We confess. The Hercules Graphics Card in the picture above isn't a special version for the technical user.

In fact, it's exactly the same as the standard Hercules Graphics Card running programs like 1-2-3™ and Symphony™ in more than 100,000 IBM® PCs.

We just wanted to make the point that the Hercules Graphics Card is not only big with business users—it's also the most popular high resolution graphics card for the technical user.

Why? We run more software than anyone else.

The Hercules Graphics Card is supported by more technical software than any other hi-res graphics card.

There are word processors that can produce publication quality documents with mathematical formulas.



There are programs that enable your PC to emulate a graphics terminal and run mainframe graphics software.

There are toolkits of graphics utilities that can be linked to popular programming languages.

There are CAD programs that can provide features normally associated with $50,000 systems.

And we supply free software with each card to do hi-res graphics with the PC's BASIC. No one else does.



Hardware that set the high performance standard.

When we introduced the Hercules Graphics Card in August, 1982, it set the standard for high resolution graphics on the PC.

But we didn't stop there. In the past two years, we've continually refined the original design.

Today's Graphics Card gives you two graphics pages, each with a resolution of 720h x 348v, and a parallel printer port—standard.

A 2K static RAM buffer elegantly eliminates scrolling flicker. And our exclusive safety switch helps prevent damage to your monitor.

Convinced? Good. Now, how about a little color?

Should you want IBM compatible color graphics for your system, then the new Hercules Color Card is the smart way to go.



It gives you a parallel printer port and a size small enough to fit in one of the XT's or *Portable's* short slots.

And both Hercules cards are compatible with the new AT™ and backed by our two year warranty.

Call 800 255-5550 Ext. 408 for the name of the Hercules dealer nearest you and we'll rush you a free info kit. See why the company that made the first graphics card for the IBM PC still makes the best.

Hercules.
We're strong on graphics.

Address: Hercules, 2550 Ninth St., Berkeley, CA 94710 Ph: 415 540-6000 Telex: 754063 **Trademarks/Owners:** Hercules/Hercules Computer Technology, 1-2-3, Symphony/Lotus Development; IBM, AT/International Business Machines

Achieve laboratory automation at low cost—connect a DAISI™ (Data Acquisition and Instrument Systems Interface) to your Apple® *II* or *IIe* Computer.

DAISI peripheral devices...

- Interface with Apple *II* and Apple *IIe* Computers and their lookalikes
- Work with all popular language systems
- Come with cable, instructional diskette and comprehensive manual

DAISI and Apple work together as a single system to measure, monitor, time, analyze, control and record a wide variety of research and testing functions.

DAISI peripherals plug easily into any Apple expansion slot, ready to be used in chromatography, environmental data collection, evoked response, gas analysis, spectroscopy, signal processing, solar heating, mechanical measurement, structural testing, and many more functional applications.

The AI13 analog-to-digital converter reads instruments and sensors and has its own external unit for easy cable access.

DISCOVER NEW HORIZONS IN LABORATORY AUTOMATION

AND KEEP YOUR COSTS DOWN TO EARTH

Here's a rundown on the DAISI Peripherals:

AI13 12-Bit Analog Input Interface.....$550
- 16 input channels
- 20 microseconds conversion time

DI09 Digital Interface with Timers.....$330
- timing and interrupt capability
- direct connection to BCD digits, switches, relays

AO03 8-Bit Analog Output Interface .....$195–$437
- up to 8 independent channels
- range and offset adjustable

AI02 8-Bit Analog Input Interface.....$299
- 16 input channels
- 70 microseconds conversion time

Plus the SC14 system for front-end signal conditioning and amplification, the UI16 isolation system for AC or DC power input or output, and more . . .

AND NOW . . . AMPRIS™

An easy add-on to Applesoft® BASIC.

With AMPRIS you can:
- Read and store analog and digital inputs
- Send out analog and digital outputs
- Set, read and control the DI09 counters
- Set, read and control the DI09 shift registers
- Make full use of the DI09 interrupt capability

Using AMPRIS is as easy as inserting an ampersand (&) command where you would normally insert an Applesoft command. For more information about the complete line of DAISI peripheral devices and the full spectrum of their applications, write or phone:

Interactive Structures, Inc.
146 Montgomery Avenue
Bala Cynwyd, PA 19004
Telephone: (215) 667-1713

(Designed and manufactured in the USA)

LETTERS

most of Mr. Knop's other requirements.

I had come to the conclusion that since the IBM does not use the Zilog 8000 or the Motorola MC68000, computers with these microprocessors must not exist; one certainly cannot find articles in BYTE indicating that there are software programs that are compatible with the 8000.

It is frustrating, to say the least, to always have to contact Olivetti to learn of programs I can use with the Z8000.

C. L. NORRIS
West Palm Beach, FL

ICONS VERSUS COMMANDS

In the 1960s it was batch processing, and I felt so modern sitting at a card punch. Around 1970, a number of batch systems introduced timesharing "options," and I signed up for a terminal days in advance. (For a number of years I clung to my card decks as a backup; then they were phased out.) In the mid-1970s, minicomputers were the rage, and operating systems came out that were designed from the start to be conversational: henceforth I never wanted to return to the data-entry kind of system. Around 1980, microcomputers became powerful enough to be useful, and the cathode-ray tube has become a fact of life.

Now the issue is icons versus commands, a trend that BYTE apparently has not caught on to.

I assert that icons are an advance over command-driven systems comparable to the advance from cards to the cathode-ray tube. It is not simply a matter of adding a new capability to an old design: after being introduced to icons (you guessed it: I now own a Macintosh), I am still curious to see what wonderful software is available on other systems, but I find that I have lost the patience to plow through a manual and gobble up the keywords, the syntax, the options, and the modes. Today I want it in dynamic pictures or not at all, and I don't want to have set up statements underneath, like punched cards in a drawer.

FRANCISCO JOSÉ OYARZUN
Los Angeles, CA

MORE MAC FEEDBACK

Two letters in BYTE have caused me to take word processor in hand. The first letter was from Robert Lurie ("More Mac Reactions" May 1984, page 16) concern-

(continued)

Inquiry 175

With Macalendar,™ You Would've Been on Time.



We know how easy it is to become so totally immersed in your work that you forget all about such things as 10 o'clock appointments, luncheon dates, or even (shudder) Board Meetings. That's why we designed Macalendar to help you plan, organize and implement your busy schedule.

Macalendar is a powerful time management tool for the Macintosh™ which uniquely combines a calendar with an alarm and a notepad – all designed to keep you on schedule and up-to-date. Best of all, Macalendar runs concurrently with all other programs, so it's *always there when you need it.*

Once you've entered important times and dates into Macalendar, you can go on to work on other applications. Macalendar will automatically interrupt your program with a chime to remind you of your appointment. There's no separate disk to insert; Macalendar is an ever-present, integral part of your Macintosh.

For detailed reminders or notes, take advantage of Macalendar's notepad. Simply enter memoranda for the appropriate day, and the information will be waiting for you when you call it up. Plan weeks – even years! – ahead. And never again miss another appointment, birthday, class, whatever.

Run out of room on your notepad? Just "turn the page" and fill unlimited pages with all your information. Macalendar lets you document phone calls, assemble "to-do" lists, plan out a daily schedule, etc.

Now, finally, losing yourself in your work doesn't have to mean losing track of time . . . thanks to Macalendar.*

Macalendar, $89; Lisa Desktop Calendar, $295

Videx INC. ™

1105 NE Circle Blvd. • Corvallis, OR 97330
(503) 758-0521

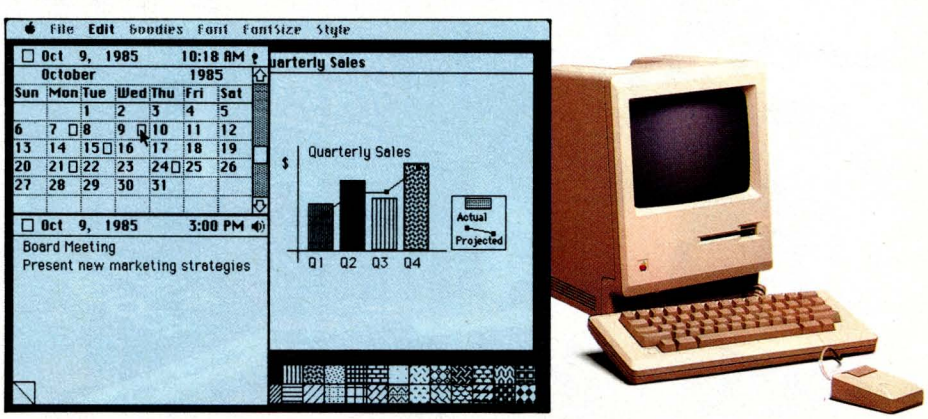

*Expanded version of Macalendar, the Desktop Calendar,™ is available for the Lisa. Macintosh is a trademark of Apple Computer, Inc. Lisa is a registered trademark of Apple Computer, Inc.

NEW from BORLAND!

TURBO TOOLBOX & TURBO TUTOR

"TURBO is much better than the Pascal IBM sells."

Jerry Pournelle,
Byte, July 1984

"TURBO PASCAL appears to violate the laws of thermodynamics.

You won't find a comparable price/performance package anywhere. It is simply put, the best software deal to come along in a long time. If you have the slightest interest in Pascal . . . buy it."

Bruce Webster,
Softalk IBM: March 1984



BORLAND INTERNATIONAL GIFT PACK

ONLY **$99.95**

A SAVINGS OF $30!



What a gift for you and your friends! The extraordinary TURBO PASCAL compiler, together with the exciting new TURBO TOOLBOX and new TURBO TUTOR. All 3 manuals with disks for $99.95.

TURBO PASCAL Version 2.0 (reg. $49.95). The now classic program development environment still includes the FREE MICROCALC SPREAD SHEET. Commented source code on disk

- Optional 8087 support available for a small additional charge

NEW! TURBO TOOLBOX (reg. $49.95). A set of three fundamental utilities that work in conjunction with TURBO PASCAL. Includes:

- TURBO-ISAM FILES USING B+ TREES. Commented source code on disk
- QUIKSORT ON DISK. Commented source code on disk
- GINST (General Installation Program)

Provides those programs written in TURBO PASCAL with a terminal installation module just like TURBO'S!

- NOW INCLUDES FREE SAMPLE DATABASE . . . right on the disk! Just compile it, and it's ready to go to work for you. It's a great example of how to use TURBO TOOLBOX and, at the same time, it's a working piece of software you can use right away!

NEW! TURBO TUTOR (reg. $29.95). Teaches step by step how to use the TURBO PASCAL development environment—an ideal introduction for basic programmers. Commented source code for all program examples on disk.

30 DAY MONEY BACK GUARANTEE These offers good through Feb. 1, 1985

For VISA and MASTERCARD order call toll free: **1-(800)-255-8008 1-(800)-742-1133**
(Lines open 24 hrs., 7 days a week) Dealer and Distributor inquiries welcome (408) 438-8400

CHOOSE ONE (please add $5.00 for handling and shipping U.S. orders)

___ All Three-Gift Pack	$ 99.95 + 5.00 **SPECIAL!**	___ Turbo Toolbox	$49.95 + 5.00
___ All Three & 8087	139.95 + 5.00 **SPECIAL!**	___ Turbo Tutor	29.95 + 5.00
___ Turbo Pascal 2.0	49.95 + 5.00	___ Turbo 8087	89.95 + 5.00

Check_____ Money Order_____ VISA_____ MasterCard_____

Card #: _____ Exp. date: _____ Shipped UPS

My system is: 8 bit ___ 16 bit ___

Operating System: CP/M 80 ___ CP/M 86 ___ MS DOS ___ PC DOS ___

Computer: _____ Disk Format: _____

Please be sure model number & format are correct.

NAME: _____

ADDRESS: _____

CITY/STATE/ZIP: _____

TELEPHONE: _____

California residents add 6% sales tax. Outside U.S.A. add $15.00 (if outside of U.S.A. payment must be by bank draft payable in the U.S. and in U.S. dollars). Sorry, no C.O.D. or Purchase Orders. 16

BORLAND INTERNATIONAL

4113 Scotts Valley Drive
Scotts Valley, California 95066
TELEX: 172373

NEW!
PC MOTION™ Control Board
IBM PC/XT® compatible stepper motor control plug-in board

$495

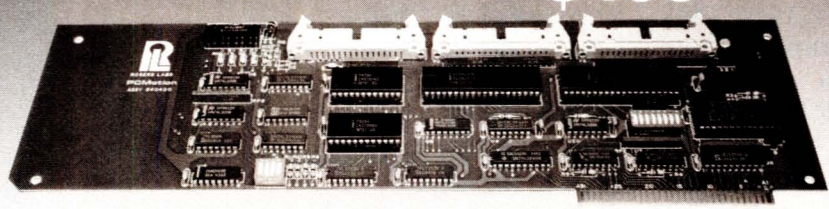

- 4 Axis stepper motor controller interface
- 32 digital I/O with (5) interrupts
- 4 channels encoder pulse inputs
- Includes real time interrupt-driven easy to use software

Smart board for Industrial and Robotic motion control that uses only a small percentage of CPU time. System needs only simple BASIC commands from application software.

Also Available: Complete ready-to-run 2 or 4 Axis stepper motor control systems — PCMotion Board, 16 channel optoisolation board, stepper motor driver, power supply, steppers motors, and cables.

ROGERS LABS
2727-E So. Croddy Way, Santa Ana, CA 92704
(714) 751-0442
(714) 957-3086
TELEX 681393

MODULA-2 FOR MACINTOSH, APPLE IIs IBM-PC AND LISA



MODULA-2 COMPILER/ INTERPRETER — $90
An advanced programming environment supplied on diskette for the Apple II, II+, and IIe, Macintosh, Lisa and the IBM PC, XT and compatibles.

PASCAL-TO-MODULA-2 CONVERTER — $100
Increase the efficiency of your Pascal programs by converting to Modula-2. Run larger programs and take advantage of Modula Corp's efficient interpreter.

MODULA ENHANCER MEMORY CARDS FOR APPLE II's AND IBM-PC's — $245
A revolutionary idea. An extra 64K of memory and a four times increase in execution speed of your Modula-2 programs compared to Pascal.

MODULA ENHANCER MEMORY CARDS AND MODULA-2 SOFTWARE FOR ONLY $285
Get the combination for a $50 savings. The card requires its own version of the compiler and interpreter to work properly.

MODULA
CORPORATION

950 N. University Ave., Provo, UT 84604 801/375-7400 or 800/LILITH2

1984 by Modula Corporation. Apple® Apple Computer Inc., IBM® IBM Corp.

LETTERS

ing Apple's not putting the floating-point software in the Mac's ROM. He mentioned that Apple programmers had exhausted their ROM space, so they moved the software to RAM. How can you exhaust ROM space unless you have reached the central processor's memory-addressing limits? The answer is: you cannot. In this case, they hadn't run out of ROM space—the fact that a 512K-byte RAM Mac is possible refutes that remark. You have to freeze the ROM at a point sometime, however, and possibly the company forgot to add the floating-point software before it froze the final version of the ROM at 64K bytes, so they put it in RAM. I have to agree with him, though; if the floating-point will run 25 percent slower out of RAM than ROM, then Apple's programmers did make a design mistake. It may be too late to do anything about it, though, because too many Macs have been distributed to change the situation.

The second letter I want to comment on was from David Nibbelin in the June 1984 issue ("American as Apple Pie," page 14). I have seen patriotism before, but this is ridiculous. I cannot understand why he is so angry that the Mac uses a Sony disk drive. If Mr. Nibbelin hasn't noticed, the computer revolution is not just happening in the United States but all over the world, and if advanced computers are to be built, technology must be used from wherever it is found. If he is really against non-American technology, then he will also boycott the Radio Shack Model 100, the AT&T PC, and almost any computer that uses 256K-byte RAM chips (a great deal of which are made in Japan). A person interested in the computer industry cannot shut out a nation like Japan, which has so much to offer us and the industry. To restate and add to a quote by Mr. Nibbelin: I hope the rest of the computer-buying public will recognize this un-American approach and express their reaction at the computer-store purchase counter, showing that they are not swayed by where a product is from—rather, by what substance it is made of.

DAVID ZIMMERMAN
Elizabeth, NJ

I am a software engineer at a major defense corporation. Most of my work is done on Digital Equipment Corporation (DEC) super-minicomputers, although I also work with military processors and a number of different desktop computers such as the IBM PC and the DEC Pro 350. I also own an Apple Macintosh, the cute

(continued)

Inquiry 244



IMSI Presents PC Paintbrush™

With PC Paintbrush, you'll now be able to do things that you once only dreamed about.

Because, like your dreams, you'll be working with a palette of up to 256 vibrant colors and shades, depending on your color card.

And, as you'll notice, you'll also have drawing tools, drop-down menus, and a range of brush widths and shapes. Plus your choice of mouse or joystick.

In addition to freeform drawing, you'll be able to draw precise triangles, rectangles, boxes, circles and ellipses.

You'll be able to cut, paste, and move things around. Even enhance graphs, text, and images from other programs like Lotus 1-2-3, Microsoft Word, and SuperCalc 3.

But don't stop with painting. PC Paintbrush also gives you an electronic type shop to work with. Several fonts, from Olde English to Computer. Each in seven styles (boldface, italics, underline, etc.) and seven sizes.

All of which makes it great for designing everything from fliers and report covers to greeting cards and birthday banners. (For a wall-sized work of art, just print sideways.)

The possibilities are endless. But the best way to see for yourself is to see for yourself. Get a demonstration at your nearest computer store.

Then, draw your own conclusions.



imsi™ SOFTWARE PUBLISHERS

Inquiry 374

INTERNATIONAL MICROCOMPUTER SOFTWARE, INC.
633 Fifth Avenue • San Rafael, CA 94901 • 415/454-7101

RUNS ON:	IBM PC/compatibles, and Corona PC, 192K RAM. IBM PCjr., and Mindset, 256K RAM. HP 150, 320K RAM. All require DOS 2.0 and up and 1 drive.
MICE:	Summagraphics, Mouse Systems, Microsoft.
JOYSTICKS:	Any IBM compatible.
GRAPHICS CARDS:	Amdek, Hercules, IBM, PCjr., Quadram, Scion, Tecmar, STB, Paradise.
MONITOR:	Color or black and white.
OUTPUT:	Printers: IBM/Epson graphics, Epson FX-80 and 100, MX 80 and 100, IDS Non-Color, IDS Prism Color, NEC 8023, C-Itoh 8510, Okidata 8X or 9X series, Radio Shack CGP-220, Xerox 1770, PrintaColor TC1040, Quadram Quadjet, Transtar Color, Diablo C150, Tektronix 4695, HP Thinkjet, Star Micronics, Epson JX-80, Data Products 8050, IBM Color printer. Plotters: HP 7475A and 7470A.

PC Paintbrush is a registered trademark of ZSOFT CORP.

little machine everyone is so curious about—the one without any documentation or software.

I must admit, Jerry Pournelle hit the nail on the head when he said that many of us who no longer consider ourselves "the rest of us" have been attracted to this little imp. Certainly the Macintosh is the closest thing to a Xerox Star workstation that one might hope to have on one's desk at home. Oh sure, it could have been cheaper, and it could use more memory. And it obviously could use some more software. But all these criticisms aside, one must admit that it is without a doubt one of the most innovative personal computers ever introduced. It also has great mass appeal because it's the first personal computer that's both fun and easy to use.

Personally, I don't feel the least bit insulted using a computer that represents information with pictures. Rather, I am intrigued by these uncommon techniques. The concepts alone merit one's attention whether they are the way of the future or not. Witness however, DEC's latest product announcement, the VAXstation 100 workstation, with its bit-mapped graphics, multiple windows, pop-up menus, use of icons, and even a mouse.

The Macintosh presents a whole new set of concepts to the personal computer user in its man-machine interface. It is a computer that people want to try. It is a desktop productivity tool that anyone can use. I won't argue that without application software there is not much you can do with it. But software will come. There is always a learning curve associated with doing something completely new, so it may take a little longer to develop Macintosh software than if you were simply porting software to yet another IBM semicompatible.

I believe, however, that Apple may have one problem with this wonderful machine—Apple's image. Apple's designers have always enjoyed the image as the wonder boys of the personal computer industry, and this is true now more than ever. However, this image will make it difficult for Apple and others to convince the corporate powers of many large and conservative companies that the Apple Macintosh is the desktop computer their employees really need. After all, the "three-letter" machines they now have on their desks have been quite an improvement over nothing at all.

If I can find any fault with Apple, I must say that I don't believe they are giving the "basement programmer" enough support. Surely they are in need of application software for this new product. Yet by relying only on the proven vendors, I feel they are ignoring the history of the personal computer software industry. Many of the software vendors Apple now considers a good risk started in their basements with just a computer and a unique idea. Also, it seems that most small software companies are good for only one or two really innovative products.

I don't fault Apple in its goal of securing a solid base of established software products for the Macintosh. This is critical to the Mac's success. However, Apple and the rest of the personal computer industry must not forget the yet-unknown software designers, as these people, unpressured to produce new products, will continue to be key innovators in the industry.

T. M. NICHOLSON
St. Louis, MO ■



Choose from our **Stand Alone, Intelligent, RS-232 units.**
COMPATIBLE WITH ANY COMPUTER OR TERMINAL.

GANGPRO-8 ..... $995.00
High throughput. Gang 8 EPROMS with the fast Algorithm. Optional 512K buffer. Programs **ALL** 24 pin & 28 pin EPROMS. Other units to gang 24 EPROMS.

PROMPRO-8 ..... $689.00
Powerful commands, easy communications, 128/256K buffer. Alpha Display, Simulation and Keypad option. Programs **ALL** EPROMS & MPU's.

PROMPRO-7 ..... $489.00
32K RAM buffer, ideal for programming 8748, 8749, other Intel MPU's and 16K-128K EPROMS.

BIPOLAR & PAL Programmers...Call!

UV ERASERS

ECONOMY MODEL QUV-T8/1 .... $49.95
Erases over 15 EPROMS. Plastic case.

INDUSTRIAL QUV-T8/2N $68.95
Metal case, UV indicator, tray, erases over 15 EPROMS in 15 minutes.

INDUSTRIAL QUV-T8/2T $97.50
With 60 minute timer and safety switch.

INDUSTRIAL QUV-T8/Z $124.95
Fast Eraser, 15 EPROMS in 7 minutes, 30 EPROMS in 15 minutes.

PRODUCTION UNIT $149.95
Model: ULTRA-LITE™. Erases 50 EPROMS in 15 minutes.

TOLL FREE **1-800-EE1-PROM**
(331-7766) · FLORIDA (305) 974-0967

TELEX 383 142

AVAILABLE SOFTWARE DRIVERS
1. IBM PC 2. APPLE II 3. Intel-MDS 4. CPM
5. TEXTRONIX 8002 6. COMMODORE 64 7. TRS-80 COLOR 8. FLEX

LOGICAL

LOGICAL DEVICES, INC.
DEPT. 6, 1321-E N.W. 65th PLACE · FT. LAUDERDALE, FL 33309
DISTRIBUTORS INQUIRY WELCOME

← Inquiry 206

F·I·X·E·S A·N·D U·P·D·A·T·E·S

FEEDBACK

Solution Doesn't Wash

T. J. Higgins felt that he could improve upon Martin Janzen's solution to the difficulties that pop up when disabling/enabling interrupts during critical sections of code on the early versions of the IBM PC with defective 8088 firmware. (See "Bug in Early 8088 Arises Later, Reader and Author Explain Fix," July 1984 BYTE, page 38.) According to Mr. Janzen, who devised the fix, Mr. Higgins's touch-up will not work.

In the original discussion, Messrs. Roskos and Janzen concluded that pushf/cli/popf would work for most applications and, when using a stack switch, that the code needed to be analyzed before cli/sti could be added to the program.

Mr. Higgins, however, saw another option for the stack switch: why not use lahf/sahf? If another register, perhaps BX, were available, you could save and restore the flags without analyzing the code and inserting cli/sti instructions. Mr. Higgins's suggestion is shown here in listing A.

Mr. Janzen reports that, unfortunately, the lahf and sahf instructions cannot surround critical sections of code, temporarily disable interrupts, and then restore the interrupt flag to its previous value.

"The lahf and sahf instructions . . . do not do this. They appear to have been included in the 8086 instruction set to make it easier to convert existing 8080 programs."

Writes Mr. Janzen: "These instructions transfer the lower 8 bits of the 8086 flags register to and from an AH register. The interrupt flag is one of the upper 8 bits and is not affected by the lahf and sahf instructions. Therefore, the sequence of instructions [suggested by] Mr. Higgins will leave interrupts disabled, rather than restoring the flag."

The pushf/cli sequence suggested by Mr. Roskos is endorsed by Mr. Janzen when it is used for surrounding any critical sections that do not move the stack. If you have a block of code that you know is a part of a routine that runs with interrupts enabled, Mr. Janzen recommends you use cli/sti. If you don't know which way to go, he suggests saving and restoring the entire flags register with the program in listing B.

Listing A: *Mr. Higgins's solution for the disabling/enabling problem in early* 8088 *microprocessors uses the sequence* lahf/sahf.

```
dev_strategy:
                ; switch to local stack
                lahf                    ; save flags in register AH
                cli                     ; disable interrupts
                mov  spsave,sp          ; save DOS's stack pointer
                mov  sssave,ss          ; . . . and stack segment regs
                mov  bx,cs              ; set up a local stack in
                mov  ss,bx              ; . . . this code segment
                mov sp,offset stkbot    ; bottom of local stack
                sahf                    ; restore flags to previous status
                .
                .
                .
                ; switch back to DOS's stack
                lahf                    ; save flags in AH
                cli                     ; disable interrupts
                mov  ss,sssav           ; restore DOS's stack segment
                mov  sp,spsav           ; . . . and stack pointer
                sahf                    ; restore flags to previous status
                ret
```

Listing B: *Save and restore the entire flags register with this program.*

```
criticalsection:
                pushf                   ;push flags register onto stack
                pop ax                  ;save flags in an unused register
                cli                     ;disable interrupts
                .
                .                       ;switch to local stack as before
                .
                push ax                 ;put the old flags on stack
                popf                    ;restore contents of flags register
```

Carroll Touch Technology Relocates

Ann Marett, marketing communications manager for Carroll Touch Technology, wrote to say that her company has relocated since it was mentioned in a System Review in the July 1984 BYTE. (See "The Sage II and Sage IV Computers," by Allen Munro, page 235.)

The correct address for Carroll Touch Technology is POB 1309, Round Rock, TX 78680. The telephone number is (512) 244-3500.

(continued)



MINORITY HI-TECH INDUSTRIES

CALL TOLL FREE
1-800-428-7979
Call on Other Items Not Listed

PRINTERS/MODEMS/PLOTTERS

Epson	
All Models	Call
Enter	
Sweet-P 6 Pen Plotter	$755
Inforunner	
Riteman Blue Plus 140 CPS IBM	$288
Riteman Plus 120 CPS	229
Riteman 15 160 CPS	480
Juki	
6100	$400
6300	Call
Silver Reed	
500	$303
550 POR S	399
770 POR S	799
Anchor	
Mark XII	$235
Express (100% Hayes)	Call
Legend	Call
Hayes	
Smartmodem 1200	$469
Smartmodem 1200B	405
Novation	
Smart Cat Plus 2400	$695
Smart Cat Plus 1200 W/Mite	299
Apple Cat II	199
103/212 Smart Cat	357

MONITORS

Amdek	Call
Taxan	
12" Amber (Composite)	$119
12" A (IBM) 122	131
12" RGB W/Grn Switch (IBM)	415
NEC	Call
Special	
12" Amber (Composite)	$ 89

DISKETTES Qty 100

Maxell	
MD-1	$175
MD-2	220
Fuji	
MD-1	$159
MD-2	189
MF1 3½ (MAG-HP)	425
MD2HD (IBM-AT)	546

COMPUTERS/CARDS

NEC	
PC-7401A Computer	Call
PC-8201A Computer	$299
PC-8201A-90 Battery Pack	17
PC-8206A 32K Ram	215
PC-8271A AC Adapter	17
Paradise	
Modular Graphics Card	$271
MGC Plus A & B Module	526
A Module	336
B Module	460

SOFTWARE

Enable	Call
Lotus	Call
Micropro	
WS Pro	$249
WS 2000	Call
Practicorp	
(IBM)	Call

MINORITY HI-TECH INDUSTRIES
5021 N. 20th Street, #10261
Phoenix, Arizona 85064

Other Information: (602) 890-0596

MasterCard ★ **WE BUY** ★ **SURPLUS GOODS** VISA

Prices reflect 3-5% Cash Discount. Shipping on most items $3.00. Prices and availability subject to change without notice. Send cashier's check or money order . . . All other checks delay shipping 2 weeks. ADD #185

BYTE'S BUGS

Patch Now Quilt

A trio of program lines were inadvertently omitted from listing 1, the type-justification patch, in the September 1984 Fixes and Updates (page 33). (See "Patch Justifies Model 100 Type.") Add the lines in listing C to the program.

Our thanks to Frederick Crane of Iowa City, Iowa, for catching this bug.

Listing C: *A patch to the Model 100 type-justification program.*

```
302 FOR Q=VTOR-L+1:IF LEN(PR$)>=R-L+1 THEN 314
314 IF RIGHT$(PR$,1)=" "THENPR$=LEFT$(PR$,LEN(PR$)-1:GOTO302
315 IF LEN(PR$)>R-L+1THENPR$=RIGHT$(PR$,LEN(PR$)-1):GOTO315
```

Bugs in Real-Time Graphics

Marcus Newton found a few bugs in listing 1 in his "Real-Time 3-D Graphics for Microcomputers" (September 1984, page 251).

Make the following changes on page 256: delete the comma after POP DS and change MOV AX,' to MOV AX,' ' (note that there are two spaces between the single quotation marks).

On page 272, change MOV AL,' to MOV AL,' ' (one space between the single quotation marks). Substitute CMPAL,'.' for CMP,AL,".

On page 270, replace the lines around the label PER70 with listing D.

Listing D: *Apply this patch around the label* PER70 *in Marcus Newton's program in the September* 1984 BYTE.

```
        ADD   H,AX      ;H = ZX*X+ZY*Y+ZZ*Z
        MOV   AX,H
        CALL  INORM     ;BX STILL = SQRT Q
        CMP   AX,CCLIP
        JLE   PER90     ;POINT NOT IN FRONT OF CAMERA
PER70:  TEST  P,0FH
        JZ    PER80     ;TRUE PERSPECTIVE
PER75:  MOV   BX,H
PER80:  MOV,  AX,I
        CALL  INORM
        MOV   I,AX      ;I = NORM*I/BX
        MOV   AX,J
        CALL  INORM
        MOV   J,AX      ;J = NORM*J/BX
        CALL  PLOT      ;PLOT PIXEL OR DRAW VECTOR
```

Bang Is Dud

Pat McHargue wrote to tell us that an error mars Dick Pountain's listing in the August 1984 BYTE U.K. (See "Microcomputer Design," page 361.) The process bang, as defined in listing 1 on page 364, is incorrect. At present, it does not print "WHAM!" on the screen; rather it outputs "HM." The correct definition is presented here in listing E.

Listing E: *Corrections to the process bang.*

```
PROC bang (CHAN send) =
  DEF bang.word = "WHAM! ":
  SEQ i = [1 FOR bang.word[BYTE 0]]
    send ! bang.word[BYTE i]:
```

Symbolic Changes

Dr. Michael W. Ecker found a bug in the sample animation program that accompanies Bill Sudbrink's review of the Sanyo MBC 550 microcomputer (August 1984, page 270).

In listing 1 (page 282), change the greater-than symbol (>) in line 150 to a less-than symbol (<), otherwise the down-arrow key will not function as intended.

Book Gets Wrong Name

In the August Fixes and Updates section, we inadvertently misstated the name of one of Scot Kamins's books (on page 40). The correct name is *Apple Backpack*.■

What's the best recommendation you can make when you're asked about business graphics?



The Business Professional Plotter from Hewlett-Packard —The 6-Pen HP 7475A

Today, business professionals are more aware of the vital importance of business graphics to their success. Tomorrow, they may ask for your recommendation. Here's some important information that will help. Tell them...

Make a first impression that lasts

Truly impressive graphic presentations can create a first impression of quality and professionalism that lasts and lasts. The way you present your information can be equally as important as the information you're presenting. And that's where the HP 7475A Business Professional Plotter lets your professionalism shine through.

Standards unsurpassed in the plotter business

The technical standards of the HP 7475A have no equal for producing quality graphics. With a resolution of one-thousandth-of-an-inch, curved lines are smooth, not jagged, and straight lines are *consistently* straight. Its exceptional repeatability (the ability of a pen to return *precisely* to a given point) assures that intersecting lines and circular shapes will meet *exactly.*

Compatible with almost any personal computer in your office and supported on today's most popular graphics software packages

The HP 7475A quickly "makes friends" with most of the personal computers you may already have in your office, including IBM®, Apple™, and Compaq™— as well as a host of HP computers. You even have a choice of many off-the-shelf software packages, such as Lotus 1-2-3™ and Symphony™, that give you "first-day" productivity with the HP 7475A.

Your Choice: 2 media sizes

While most professional business applications will be satisfied with standard 8½ x 11" paper or transparencies, the HP 7475A adds the capability of plotting on larger 11 x 17" media, too.

The cost? Surprisingly affordable

The HP 7475A Business Professional Plotter is an amazingly affordable $1895. When you consider the high cost of having your graphics prepared by an outside service, you'll find the return on your investment is almost immediate.

1-2-3 and Symphony are trademarks of Lotus Development Corporation

Another choice: HP's low-cost, high performance Personal Computer Plotter

For the "business on a budget," you may also want a look at our 2-pen Personal Computer Plotter, the HP 7470A. Its low-cost (only $1095) is as remarkable as the quality of its plots. With many of the same features as the HP 7475A, the HP 7470A plots on media up to 8½ x 11". It stores and caps two-pens, and you can easily change the pens for multi-color plotting.

Send for your FREE "Better Presentations Package" today!

For a FREE sample plot, overhead transparency, and more details, mail the coupon below. We'll also enclose a list of graphics software packages you can use right "off-the-shelf."

For the name of your nearest Hewlett-Packard dealer, call toll-free 800-FOR-HPPC.

HEWLETT PACKARD

1101404

YES! I want to make the most informed business graphics recommendation I can. Please send me your FREE "Better Presentation Package," so I can learn more about the HP 7475A Business Professional Plotter and the HP 7470A Personal Computer Plotter. I understand I will receive this valuable package without cost or obligation.

Name _____ Title _____

Company _____

Address _____

City, State & Zip _____

Phone Number ( ) _____

My computer is _____

Send to: Hewlett-Packard, 16399 W. Bernardo Drive,
San Diego, CA 92127-1899
Attn: Marketing Communications

11404 BT1


Your greatest challenge
lies ahead and downwards
ZORK
I
INFOCOM


The next step
downward is danger
ZORK
II
INFOCOM


It all
comes down to this.
ZORK
III
INFOCOM


A LOCKED DOOR. A DEAD MAN.
And 12 Hours to solve the murder.
DOCUMENTARY EVIDENCE
DEADLINE


The WITNESS
SOMEBODY'S GOING TO TAKE THE DEEP SIX!


STARCROSS
INFOCOM












AND NOW FOR SOMETHING INCOMPLETELY DIFFERENT!

Incomplete, yes.
But it's not just because we're always bringing out new stories in the Infocom interactive fiction collection. Nor is it simply due to the fact that with all the writing and re-writing, honing and perfecting that we put into every one of our stories, our work is seemingly never done.

The real reason is: an Infocom work of fiction can never be complete until you become a part of it.

You see, as hard as we work at perfecting our stories, we always leave out one essential element—the main character. And that's where you enter in.

Once you've got Infocom's interactive fiction in your computer, you experience something akin to waking up inside a novel. You find yourself at the center of an exciting plot that continually challenges you with surprising twists, unique characters (many of whom possess extraordinarily developed personalities), and original, logical, often hilarious puzzles. Communication is carried on in the same way as it is in a novel—in prose. And interaction is easy—you type in full English sentences.

But there is this key difference between our tales and conventional novels: Infocom's interactive fiction is active, not passive. The course of events is shaped by the actions you choose to take. And you enjoy enormous freedom in your choice of actions—you have hundreds, even thousands of alternatives at every step. In fact, an Infocom interactive story is roughly the length of a short novel in content, but because you're actively engaged in the plot, your adventure can last for weeks and months.

In other words, only you can complete the works of Infocom, Inc. Because they're stories that grow out of your imagination.

Find out what it's like to get inside a story. Get one from Infocom. Because with Infocom's interactive fiction, there's room for you on every disk.



In CUTTHROATS,™ the plot involves a motley band of hardbitten salts who get wind of a shipwreck laden with sunken treasure near the remote island where you live. In exchange for your diving skills, they offer you a piece of the action. Your challenge: survive them, the perils of the deep, and escape with the treasure and your life. Good luck!



THE HITCHHIKER'S GUIDE TO THE GALAXY™ by Douglas Adams is the most mind-boggling story we've ever published. In the person of Arthur Dent, you'll chortle as your planet is demolished. You'll yelp with laughter as your life is threatened by a galaxy of horrors. Your sides will positively split as you search the universe for... well, you'll find out. Maybe.



In SUSPECT,™ our newest mystery thriller, you're a reporter who gets the scoop on the society event of the year—the murder of a Maryland Blue Blood at a fancy costume ball. Great! Except you're the prime suspect. And if you can't find the real killer, your next by-line could be in the obituaries.

INFOCOM™

Infocom, Inc., 55 Wheeler Street, Cambridge, MA 02138

For your: Apple II, Atari, Commodore 64, CP/M8″, DECmate, DEC Rainbow, DEC RT-11, IBM PC* and PCjr, KAYPRO II, MS-DOS 2.0,* NEC APC, NEC PC-8000, Osborne, Tandy 2000, TI Professional, TI 99/4A, TRS-80 Models I and III.

*Use the IBM PC version for your Compaq, and the MS-DOS 2.0 version for your Wang or Mindset.

CUTTHROATS and SUSPECT are trademarks of Infocom, Inc. THE HITCHHIKER'S GUIDE TO THE GALAXY is a trademark of Douglas Adams.



Dig Out With Model 70 PC Cartridge Tape System

Digi-Data's Model 70 PC cartridge tape system lets you back-up your PC's Winchester drive without getting buried in floppies. One cartridge holds 16.5 Mbytes of data, more than you can put on 51 floppy disks! And you can back-up your 10 Mbyte PC XT® drive in less than 15 minutes of *unattended* operation. That is a small fraction of the time it would take with the PC's floppy, with you standing there changing disks.

Our file-oriented structure makes it possible for you to back-up only what has to be changed on your disk. That saves still more time and storage capacity.

70 PC comes ready to run on your IBM PC XT and most compatibles like Compaq, Columbia Data Products and Eagle. Complete with controller board, driver software and cables.

Digi-Data's products also include 1/2 inch and 1/4 inch start/stop and streaming drives and systems.

DIGI-DATA CORPORATION

®... First In Value

8580 Dorsey Run Road
Jessup, MD 20794
(301) 498-0200 Telex 87580

In Europe contact:

DIGI-DATA LTD
Unit 4
Kings Grove
Maidenhead, Berkshire
England SL6 4DP
Tel. 0628-29555-6
Telex 847720

® PC XT is a registered trademark of IBM Corporation

Inquiry 105

Texas Instruments Adds Briefcase Portable

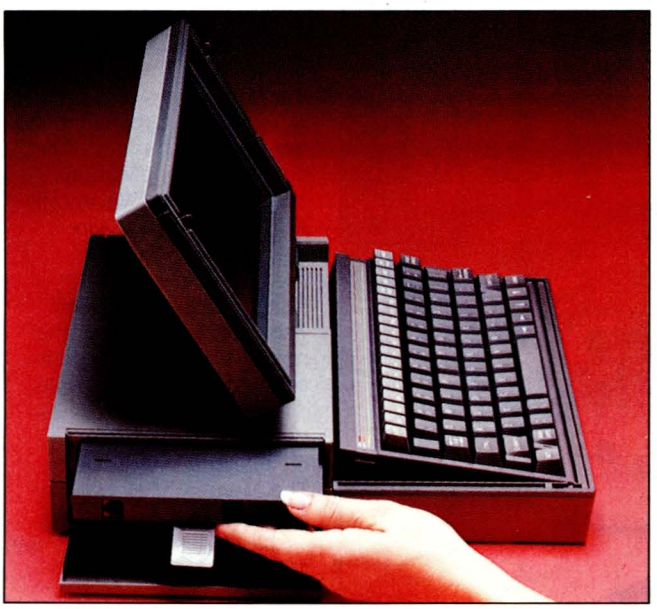

The briefcase-size Pro-Lite portable computer is compatible with Texas Instruments' Professional Computer. Pro-Lite includes one 720K-byte 3½-inch floppy-disk drive, an 80C88 microprocessor, an 80-column by 25-line liquid-crystal display, and 256K bytes of memory, expandable to 768K.

Two internal expansion slots can be used for a 300-bps modem, an external color monitor interface, an RS-232C interface, or a "solid-state software" ROM card. A second 3½-inch disk drive and an eight-hour battery pack are available as external expansion options and attach to the rear of the Pro-Lite. An optional interface cable allows the Pro-Lite to be linked to any MS-DOS computer to transfer files; the Pro-Lite can emulate an external disk drive to simplify file transfers.

Without the battery pack, the Pro-Lite weighs 10.5 pounds with one disk drive or 13.5 pounds with both drives. The Pro-Lite will be available this month through national account direct sales and value-added resellers for $2995; TI will make it available through retail channels at a later date. Contact Texas Instruments Inc., Data Systems Group, POB 809063, Dallas, TX 75380-9063, (800) 527-3500.
Inquiry 540.

Rolm Unveils Computer/Telephone Systems

Rolm has introduced two new systems combining personal computers with Rolm telephone systems. Cedar is a complete IBM PC-compatible computer and multiline digital telephone, and Juniper is a telephone attachment for the IBM PC. Both systems can only be used by companies that have Rolm's CBX private branch exchange (PBX). Both can emulate DEC or IBM terminals to access mainframes.





Cedar includes a multiline digital telephone, a speakerphone, an IBM-compatible personal computer, and communications hardware and software allowing communications over internal phone lines at up to 19,200 bps. Cedar and Juniper can also access modems attached to the CBX system to communicate with the outside world. The system includes 512K bytes of memory, two 5¼-inch disk drives, a 9-inch monitor, and MS-DOS 2.11.

Juniper consists of an adapter board for the IBM PC, software, and a multiline digital telephone with a two-way speakerphone. It requires an IBM PC with 256K bytes of memory.

Cedar is priced at $4995, and Juniper is $1495. In quantities of 100, the prices are $4245 and $1360, respectively. Contact Rolm Corp., 4900 Old Ironsides Dr., Santa Clara, CA 95054, (408) 986-1000.
Inquiry 541.

(continued)

Okidata Introduces $268 Color Printer

Okimate 20 from Okidata combines thermal-transfer and dot-matrix technologies in a $268 full-color printer. Its 24-pin square-dot print head can produce a resolution of up to 144 by 144 dots per inch. Okidata says the Okimate 20 can print more than 100 different shades by mixing the four ribbon colors. The thermal-transfer technology doesn't require special thermal paper—it can print on plain paper, letterhead, or overhead transparencies.

The Okimate 20 also includes either a parallel or serial "Plug 'N Print" interface, which means the printer can be used with most personal computers. It can print 80 characters per second (cps) in draft mode, or 40 cps in letter-quality mode.

For more information, contact Okidata, 532 Fellowship Rd., Mt. Laurel, NJ 08054, (609) 235-2600.

Inquiry **542.**



Video for the Mac

Mentaur Technologies has introduced a solid-state, compressed-circuitry, video-output device for the Macintosh. The Mentaur Composite Video Adaptor provides a composite video signal of the Macintosh screen through a built-in, standard BNC connector. This lets the operator use the Macintosh with large-screen video projectors and monitors for business or educational applications.

The Mentaur CVA installs with no soldering, wire splicing, or mounting hardware. Illustrated instructions are included. This device eliminates the need for hard-wire modifications and interface units.

Documentation includes projector and monitor manufacturer information. The Mentaur CVA lists for $199.95. Contact Mentaur Technologies, POB 1467, San Marcos, TX 78666, (512) 396-1565.

Inquiry **543.**

PC-Compatible Seequa Cobra Features 16-bit Expansion Bus

The Seequa Cobra is an IBM PC-compatible computer with an extended PC AT-compatible 16-bit expansion bus. The Cobra uses an 8086 processor with a clock speed of 8 MHz, switchable to the standard IBM PC rate of 4.77 MHz. Seequa says another function of the 16-bit hardware bus is to produce a flicker-free image for the Cobra's color-graphics display.



In addition to the 8086, the Cobra features a Z80 processor, 256K bytes of memory, one 5¼-inch floppy disk, a 10-megabyte hard disk, a clock/calendar, and parallel and serial ports. Seequa bundles WordStar, SuperCalc, and a number of other programs with the Cobra.

Seequa plans to release the Cobra in March for $4995 without a monitor. Contact Seequa Computer Corp., 8305 Telegraph Rd., Odenton, MD 21113, (301) 672-3600.

Inquiry **544.**

Juki Announces $299 Daisy-Wheel Printer

The Juki 6000 is a portable letter-quality printer that uses standard daisy-wheel print elements and ribbons. The printer weighs about 13 pounds and measures 16 by 9¼ by 5½ inches. It prints at a speed of 10 characters per second on paper up to 9 inches wide.

The Juki 6000 is available with either serial or parallel interfaces and can print at 10, 12, or 15 characters per inch using any Diablo-type daisy wheel.

List price of the Juki 6000 is $299. Contact Juki Industries of America, 299 Market St., Saddle Brook, NJ 07662, (201) 368-3666.

Inquiry **545.**

(continued)

Available for the IBM PC, AT, XT, jr., and true compatibles*

GOT YOUR SIDEKICK™ YET?

The Super Organizer

Whenever you're using your computer . . . from start to finish of your session Sidekick™ will be there . . . ready to serve. And it's as lightning-fast and compact as only Borland knows how to make it.

There's a notepad that has a full-screen editor that can time and date stamp your notes, and then save them to disk. You can even pull information into the notepad directly from the screen of your "underlying" software.

Suppose you're working in Lotus and the phone suddenly rings. Give your Sidekick a call and it pops right up over Lotus with the notepad you need. Or an appointment calendar . . . one you can never misplace.

What if you need to do a quick calculation? A keystroke instantly brings up the calculator. And the results of your calculations can even be transferred to your "underlying" software.

Need to make a phone call? Up pops your personal phone directory. Type in the name you want . . . and Sidekick jumps right to the phone number. Another keystroke, and the phone is automatically dialed for you.**

There's lots more, too. You can move the Sidekick windows anywhere on the screen you like. And you can have as many on screen at a time as you need. There's even an on-line help window for each of Sidekick's features.

We designed it because we needed it. If you've ever been writing a report and needed to do a quick calculation, or jot down a note, then you need Sidekick, too.

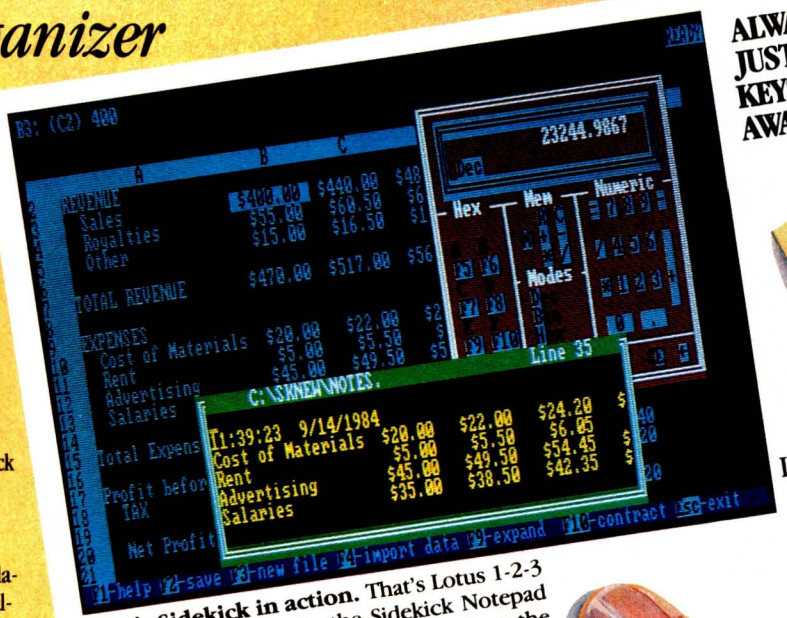

Here's Sidekick in action. That's Lotus 1-2-3 running underneath. In the Sidekick Notepad you can see data that's been imported from the Lotus screen. On the upper right, that's the Sidekick Calculator.

***Only with Hayes Smartmodem and compatibles.*



WHETHER YOU'RE RUNNING LOTUS, WORDSTAR, dBASE OR WHATEVER . . .

JUST A KEYSTROKE AND A SIDEKICK WINDOW OPENS . . .

- A CALCULATOR
- A NOTEPAD
- AN APPOINTMENT CALENDAR
- AN AUTO DIALER
- A PHONE DIRECTORY
- AN ASCII TABLE

"IF YOU USE A PC, GET SIDEKICK. YOU'LL SOON BECOME DEPENDENT ON IT."
Jerry Pournelle, BYTE

YOU CAN ORDER YOUR COPY OF SIDEKICK™ TODAY!

For VISA and MasterCard orders call Toll Free **1-800-255-8008** in California **1-800-742-1133**
(lines open 24 hours, 7 days a week) Dealer Distributor Inquiries Welcome 408-438-8400 Inquiry 42

SIDEKICK™ $49.95
Non-copy protected
Version: $79.95
(Plus $5.00 shipping and handling.)

Check ☐ Money Order ☐
VISA ☐ MasterCard ☐

Card # _____

Expiration Date _____

**PC jr. runs non-copy protected version only.*

Please be sure your computer is an IBM PC, AT, XT, jr., or true compatible!

NAME _____

ADDRESS _____

CITY/STATE/ZIP _____

TELEPHONE _____

California residents add 6% sales tax. Outside U.S.A. add $15.00. (If outside of U.S.A. payment must be by bank draft payable in the U.S. and in U.S. dollars.) Sorry, no C.O.D. or Purchase Orders.

S15

BORLAND INTERNATIONAL

Borland International
4113 Scotts Valley Drive
Scotts Valley, California 95066
TELEX: 172373

Device for Macintosh Uses Removable 5-Megabyte Cartridges

Iomega has introduced a 5-megabyte version of its Bernoulli Box for the Apple Macintosh. The Bernoulli Box uses removable cartridges that contain floppy-disk-like media with an average access time of 50 milliseconds.

Iomega also makes 10- and 20-megabyte versions of the Bernoulli Box for the IBM PC and compatibles; the Mac Bernoulli Box is not compatible with the IBM version. Mac Bernoulli Box cartridges can be exchanged with any other Macintosh, however, allowing transfer of large quantities of data on a single disk. The 5-megabyte cartridges are physically smaller than the 10- and 20-megabyte cartridges.



The Mac Bernoulli Box costs $1895; cartridges are $65 each. For further information, contact Iomega Corp., 4646 South 1500 W, Ogden, UT 84404, (801) 399-2171.

Inquiry **546.**

Thesys Offers 5-Megabyte RAM Expansion System for $3495

Fastfile stores up to 5 megabytes of data in a stand-alone device with an access time of less than 250 nanoseconds. Fastfile uses 256K-byte RAMs and features an uninterruptible power supply to prevent loss of data. Also included are an expansion card for the IBM PC and software for print spooling and disk caching. While Fastfile will speed up ordinary PC applications, the company stresses that it can also be used to improve the performance of a local-area network.

Fastfile will be available for the IBM PC in January, according to the manufacturer. It measures 5.3 by 9.7 by 12.4 inches. Fastfile will cost $1795 with 1.5 megabytes, $2795 with 3 megabytes, and $3495 with 5 megabytes. Contact Thesys Memory Products Corp., 7345 East Acoma Dr., Scottsdale, AZ 85260, (602) 991-7356.

Inquiry **547.**

HyperDrive Internal Hard Disk for the Macintosh

General Computer Company has introduced HyperDrive, a hardware expansion for Apple's Macintosh computer combining a 512K-byte memory upgrade and an internal 10-megabyte hard-disk drive. The company connects the HyperDrive's logic board directly to the Macintosh's main circuit board and fits the disk drive inside the computer. Users can boot from either the floppy or the hard disk. Both Macintosh serial ports remain free for modems, printers, or network use. Software is included to partition the hard disk into many virtual disks, which are automatically resized to accommodate the user's files.

Hyperdrive will be available this month for $2795; for Macintoshes already equipped with 512K bytes of RAM, the price is $2195. For more information, contact General Computer Corp., 215 First St., Cambridge, MA 02142, (800) 422-0101; in Massachusetts, (617) 492-5500.

Inquiry **548.**

Whitechapel Workstation Displays 1024 by 800 Pixels

Whitechapel Computer Works' graphics workstation has a resolution of 1024 by 800 using the National Semiconductor 32016 processor. The MG-1 includes 512K bytes of memory, a 10-, 22-, or 45-megabyte hard disk, an 800K-byte 5¼-inch floppy-disk drive, a high-resolution display, a mouse, and the Genix operating system. Main memory can be expanded to 4 megabytes.

Its UNIX-based operating system and optional Ethernet link are designed to enhance the system's usefulness in computer-aided design and engineering and scientific applications.

The MG-1 is about $6975 with a 10- megabyte hard disk, $8250 with a 22-megabyte hard disk, and $9500 with a 45- megabyte hard disk. Contact Whitechapel Computer Works Ltd., 75 Whitechapel Rd., London E1 1DU, England, tel: 01-377-8680; from the U.S., 011-44-1-377-8680.

Inquiry **549.**

Gifford MC-186 Expands to Multiuser MS-DOS System

Gifford Computer Systems' MC-186 uses both 80186 and Z80H processors to support up to eight users. The MC-186 uses Multiuser Concurrent DOS, based on Digital Research's Concurrent DOS, which enables each user to run four applications concurrently. The MC-186 can be attached to an ARCNET-compatible DR Net network to link with up to 255 other MC-DOS computers.

The MC-186 includes one megabyte of RAM, a 23-, 44-, or 62-megabyte hard disk, a 1.2-megabyte floppy-disk drive, 10 serial ports, and a single parallel port. Other features are a clock/calendar, a diagnostic EPROM, and an optional network controller board. With a 44-megabyte hard disk, the system costs $13,700.

Contact Gifford Computer Systems, 2446 Verna Court, San Leandro, CA 94577, (415) 895-0798.

Inquiry **550.**

(continued)

NEW PRODUCT NEWS FROM TELETEK

Systemaster II. Responding to market demand for speed and increased versatility, Teletek is proud to announce the availability of the next generation in 8-bit technology — the new Systemaster II! The Systemaster II will offer two CPU options, either a Z80B running at 6 MHz or a Z80H running at 8 MHz, 128K of parity checked RAM, two RS232 serial ports with on-board drivers (no paddle boards required), two parallel ports, or optional SCSI or IEEE-488 port. The WD floppy disk controller will *simultaneously* handle 8" and 5¼" drives. A Zilog Z-80 DMA controller will provide instant communications over the bus between master and slave. Add to the DMA capability a true dedicated interrupt controller for both on-board and bus functions, and the result is unprecedented performance. Systemaster II will run under CP/M 3.0 or TurboDOS 1.3, and fully utilize the bank switching features of these operating systems.

SBC 86/87. As the name indicates, Teletek's new 16-bit slave board has an Intel 8086 CPU with an 8087 math co-processor option. This new board will provide either 128K or 512K of parity checked RAM. Two serial ports are provided with individually programmable baud rates. One Centronics-compatible parallel port is provided. When teamed up with Systemaster II under TurboDOS 1.3, this 5MHz or 8MHz multi-user, multi-processing, combination cannot be beat in speed or feature flexibility!

Teletek Z-150 MB. Teletek is the first to offer a RAM expansion board designed specifically for the Z-150/Z-160 from Zenith. The Teletek Z-150 MB is expandable from 64K to 384K. Bring your Z-150 up to its full potential by adding 320K of parity checked RAM (or your IBM PC, Columbia, Compaq, Corona, Eagle, or Seequa to their full potential). The Teletek Z-150 MB optionally provides a game port for use when your portable goes home or a clock/calendar with battery backup!

Evaluate the Systemaster II, SBC 86/87 or Teletek Z-150 MB for 30 days under Teletek's Evaluation Program. A money-back guarantee is provided if not completely satisfied! All Teletek products carry a 3-year warranty.

(Specifications subject to change without notice.)



TELETEK

4600 Pell Drive
Sacramento, CA 95838
(916) 920-4600
Telex #4991834
Answer back — Teletek

Inquiry 349

Yes,
I'm interested in information regarding:

- ☐ Systemaster II
- ☐ SBC 86/87 ☐ Z-150 MB
- ☐ Evaluation Program
- ☐ Teletek's S-100 Board Line

Name _____
Company _____
Address _____
_____ 1B

Networking Operating System for IBM PC

Waterloo Port is a networking operating system for IBM personal computers and compatibles. According to the manufacturer, Port users can run such applications as Lotus 1-2-3, WordStar, MultiMate, dBASE II, and Advanced BASIC using PC-DOS 2.1 as a "guest operating system" under Port. Port also includes a built-in Text Editor and Text Formatter. Port allows several tasks to execute concurrently; they can be displayed as separate on-screen windows or can be hidden from view until selected.

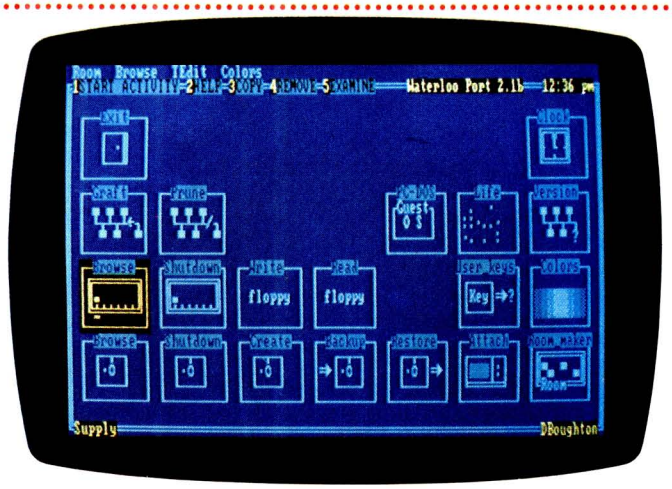

Port uses icons and "offices" for each application function; selections can be made using the keyboard or an optional mouse. With Port, network users can share printers and other peripherals. Diskless workstations can download software, including the operating system, through the network.

Waterloo Port also allows users to access mainframe computers through the network. Port includes its own development system and programming language to develop network-based software. Processes can pass messages to each other through the network, enabling real-time multiuser applications to be developed.

Software and hardware to convert an IBM PC into a Waterloo Port software server is $1540. Workstations can be added to the network with a $920 software/hardware package. For more information, contact Waterloo Microsystems Inc., 175 Columbia St. W, Waterloo, Ontario N2L 5Z5, Canada, (519) 884-3141.

Inquiry 551.

MicroPro Enhances WordStar

MicroPro's WordStar 2000 adds a number of features to its popular WordStar word-processing program. Some of the enhancements are an Undo command to restore deleted text, use of windows to view up to three documents simultaneously, user-definable function keys, a "keystroke glossary" for frequently typed text or command sequences, footnoting, spelling correction, proportional spacing, and on-screen boldfacing, underlining, centering, and pagination.

WordStar 2000 also includes some spreadsheet and database features. It can perform calculations within a document, sort lists of text or numbers, and merge data into letters for customized mailings.

A separate version, called WordStar 2000 Plus, adds telecommunications, a mailing list database program, and indexing and table of contents capabilities.

WordStar 2000 requires an IBM PC or compatible with PC-DOS 2.0 or later, 256K bytes of memory, and two double-sided disk drives; a hard disk is recommended. WordStar 2000 Plus requires a Hayes Smartmodem or compatible modem to use the telecommunications features.

WordStar 2000 is $495; WordStar 2000 Plus is $595. Current WordStar owners can upgrade to WordStar 2000 for $250 or WordStar 2000 Plus for $350. For more information, contact MicroPro International Corp., 33 San Pablo Ave., San Rafael, CA 94903, (415) 499-1200.

Inquiry 552.

(continued on page 440)

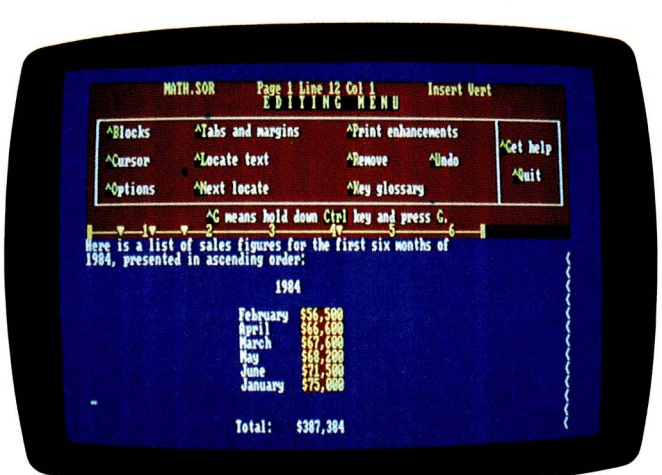

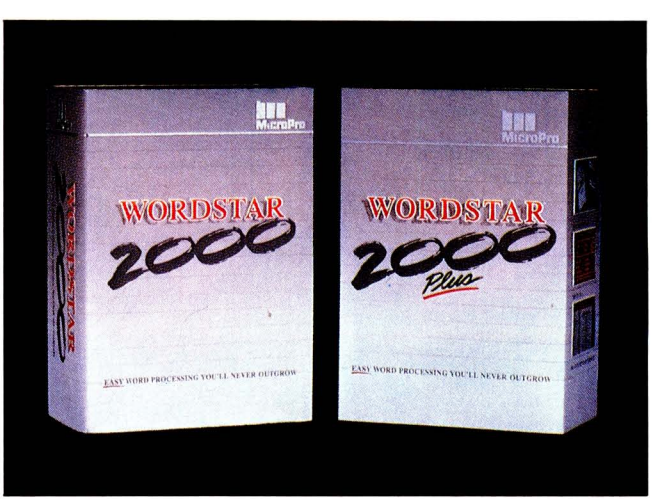

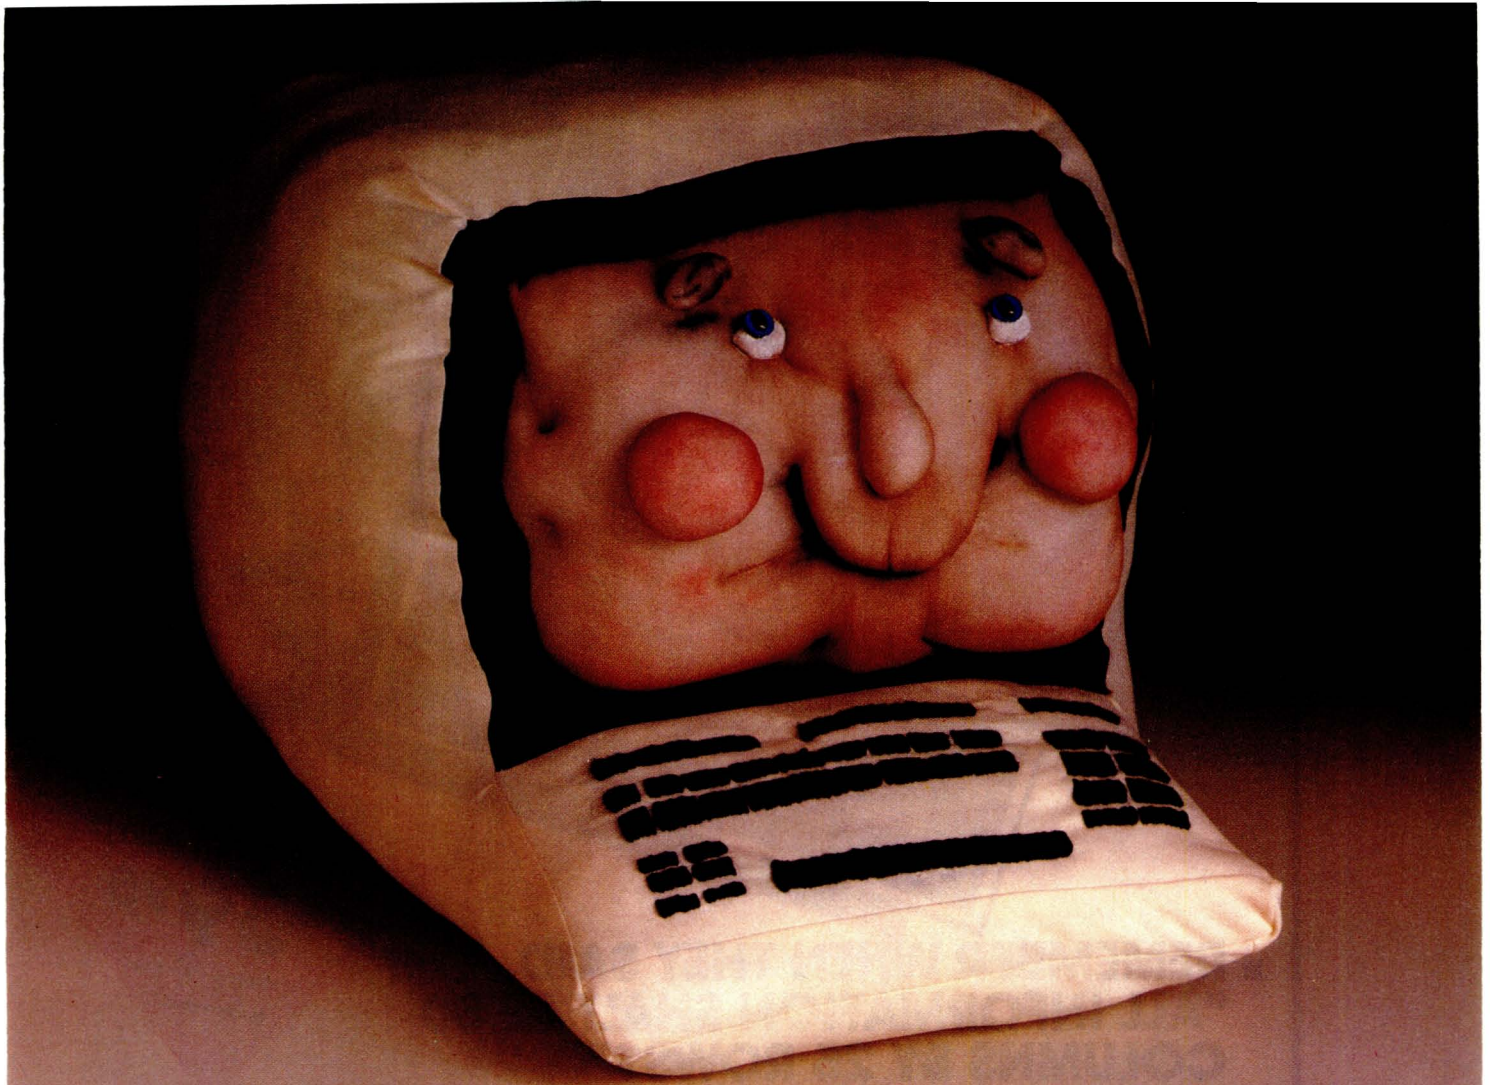

Brighten up your dumb terminal—add a UDS 212 A/D

A little outside intelligence can turn your dumb terminal into a data communications genius. And the intelligence you need is built into UDS' new 212 A/D, a smart 300/1200 bps modem with an integral automatic calling unit.

With the 212 A/D you can dial from keyboard or, with a single keystroke, from memory. Five 30-digit numbers in memory are battery backed for 3-5 year retention after shutdown. Built-in test functions allow fast, reliable verification of system operation.



Before you invest in more microcomputers, check the advantages of add-on intelligence. **Call 800/633-2252, ext. 353.** Universal Data Systems, 5000 Bradford Drive, Huntsville, AL 35805. Telephone 205/837-8100; TWX 810-726-2100.

Universal Data Systems

MOTOROLA INC.
Information Systems Group

Inquiry 357

UDS modems are offered nationally by leading distributors. Call the nearest UDS office for distributor listings in your area.
DISTRICT OFFICES: **Atlanta,** GA, 404/998-2715 • **Aurora,** CO, 303/368-9000 • **Bellevue,** WA, 206/455-4429 • **Blue Bell,** PA, 215/643-2336 • **Boston,** MA, 617/875-8868 **Columbus,** OH, 614/895-3025 • **East Brunswick,** NJ, 201/238-1515 • **Glenview,** IL, 312/998-8180 • **Houston,** TX, 713/988-5506 • **Huntsville,** AL, 205/837-8100 **Mesa,** AZ, 602/820-6611 • **Minnetonka,** MN, 612/938-9230 • **Mountain View,** CA, 415/969-3323 • **Richardson,** TX, 214/680-0002 • **Silver Spring,** MD, 301/942-8558 **Tampa,** FL, 813/684-0615 • **Thousand Oaks,** CA, 805/496-3777 • **Tustin,** CA, 714/669-8001 • **Willowdale,** Ont, Can, 416/495-0008 • **Ypsilanti,** MI, 313/483-2682

Created by Dayner/Hall, Inc., Winter Park, Florida

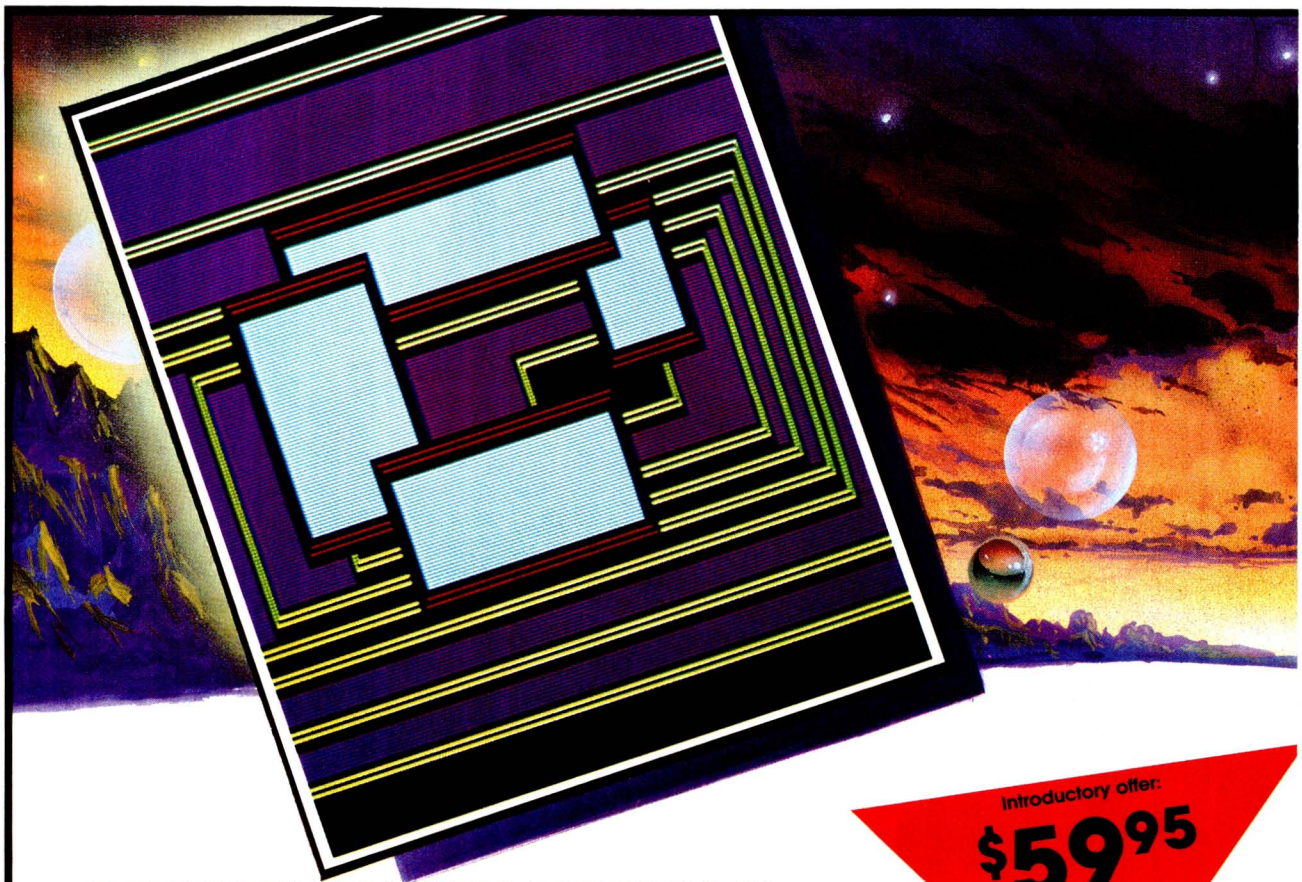

Introductory offer:
$59.95
shipping, handling
tax included!

■ REMEMBER WHEN THEY SAID, "ALL INFORMATION SHALT BE 80 COLUMNS BY 25 ROWS?" NEITHER DO WE!

■ ALL INFORMATION ISN'T CREATED EQUAL . . . AT LEAST NOT IN SHAPE OR SIZE.

Whoever said information is always 80 columns by 25 rows? Check the directory on your PC sometime. Long and skinny. Got any ideas on what to do with the other half of the screen?

Or suppose your information needs to be contained in screens bigger than your monitor, as is the case with the average spreadsheet. How would you handle it? Sure, you can spend the hours and miles of code to work it out . . . but why bother? We've already done it for you!

But, let's get a little more interesting. Suppose you were writing a program that used a combination of differing shapes of information? You might need to combine various help screens, menus, forms and vast "plains" of information. All kinds of windows on-screen at once.

Now, it's easy to do!

And how about putting some time into thinking up *new* shapes of information? The boys who put together those first spreadsheets sure made a couple of dollars doing that!

With **VSI—THE WINDOW MACHINE** you can design and test new ideas effortlessly. Then, when you're ready, **VSI—THE WINDOW MACHINE** lets you build your ideas into your code. Very, very easily!

■ WHO IS VSI—THE WINDOW MACHINE MADE FOR?

We built it for you. Whether you're a Sunday programmer or a round-the-clock professional, we've built a tool for everybody who writes code.

If you program in Pascal, C, Basic, Cobol, Fortran or even PL1, there's a version of **VSI—THE WINDOW MACHINE** for you.

We've even recently completed an interface for Turbo Pascal™ so that true, full-featured windowing can now be utilized with this fine compiler. (Turbo's own "windowing" procedure is extremely limited.)

■ WHAT ABOUT TOPVIEW™ . . . AND THE ELUSIVE MICROSOFT WINDOWS™ . . . WHERE DO WE FIT IN?

VSI—THE WINDOW MACHINE is a racy, compact engine (about 12K) that allows you to put windows into your programs instead of putting your programs into somebody else's windows. So your end-user doesn't have to buy other software in order to run your code.

And we haven't tied ourselves (or your programs) to big-memory machines, graphics cards or the "IBM only" syndrome. We also run on the compatibles and some of the not-so-compatibles.

■ HERE'S THE BIG SURPRISE . . . VSI—THE WINDOW MACHINE WILL FIT RIGHT INTO TOPVIEW, TOO!

Your code will never become obsolete. **VSI—THE WINDOW MACHINE** can add virtual screens and all of the rest of its power to IBM's Topview. You can rest assured that the software you develop *now* will have the broadest possible market today *and* tomorrow.

Turbo Pascal is a registered trademark of Borland International • IBM and TopView are registered trademarks of International Business Machines • Microsoft Windows is a registered trademark of Microsoft Corporation

VSI The WINDOW MACHINE

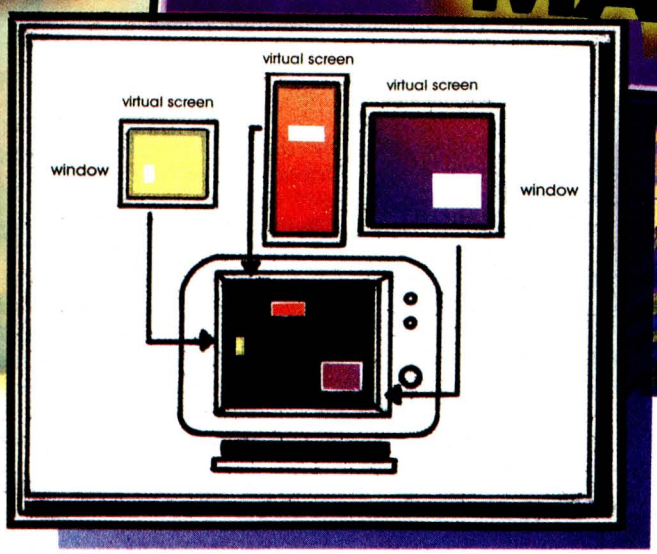

■ WHAT DOES THE VSI IN OUR NAME STAND FOR? VIRTUAL SCREEN INTERFACE!

Windowing is only half of the picture. Behind each window there's a much bigger picture. And that picture is what we call the Virtual Screen. VSI defines virtual screens rather than just windows. Each window relates to its own private virtual screen. The window then displays on your monitor whatever portion of its virtual screen you wish to exhibit at any given point in your program. Each screen can be up to 128 x 255 (either columns x rows or rows x columns). And you can have up to 255 of them at a time!!!

■ VSI—THE WINDOW MACHINE INCLUDES:

- **Multi-mode Exerciser** (Great for rapid design of screens. You can type in commands and watch them happen or you can make a whole file of commands and then stand back and watch the magic. You can even design using just cursor keys and menu selections.)
- **Zoom Windows** (Windows that grow open as you watch them.)
- **Choice of Borders** (including flashing borders)
- **Support For All Color and Monochrome Video Attributes** (no graphics card required)
- **Built-in Diagnostics**
- **Your choice of Language Interfaces** (Lattice C, Turbo Pascal, Microsoft/IBM Pascal, Microsoft Basic Compiler, Microsoft Fortran, Digital Research PL1, Realia Cobol)
- **Multiple Virtual Screens** (up to 255)
- **And much, much more!**

YOU CAN ORDER YOUR WINDOW MACHINE TODAY!!

(and save hundreds of hours of coding from now on!) Inquiry 17

FOR VISA, MASTERCARD AND AMERICAN EXPRESS ORDERS, CALL TOLL FREE:

1-800-227-3800 ext. 986 (Lines are open 24 hrs. a day, 7 days a week.)

For dealer inquiries . . . call our 800 number. $59.95 per copy
Shipping, handling and tax included

Language Interface:
—Lattice C
—Digital Research PL1
—Microsoft Basic Compiler
—Microsoft Fortran
—Microsoft/IBM Pascal
—Turbo Pascal
—Realia Cobol

AMBER
AMBER SYSTEMS, Inc.
1171 S. Saratoga-Sunnyvale Road
San Jose, CA 95129

Computer (please check the list) _____
(VSI—THE WINDOW MACHINE—IBM PC, XT, AT, PC 3270, IBM Compatibles, and Wang, TI Professional, HP 150 and Tandy 2000.)

Name _____

Title _____ Company _____

Address _____

City _____ State _____ Zip _____

Work Phone ( ) _____ Home Phone ( ) _____

___ Check ___ Money Order ___ Visa ___ MasterCard ___ American Express

Card # _____ Expiration Date _____

MAIL TO: **Amber Systems, Inc., 1171 S. Saratoga-Sunnyvale Road, San Jose, CA 95129**

30 Day Money Back Guarantee!

**California residents: tax included. Orders outside the U.S.: please add $5 for shipping and handling. (If outside of U.S., payment must either be by credit card or bank draft payable in the U.S. in U.S. dollars.) Sorry, no C.O.D. or Purchase Orders.

A·S·K B·Y·T·E

Conducted by Steve Ciarcia

80-Column in Slot 3

Dear Steve,

Your August 1984 Ask BYTE column stated that an 80-column card cannot be used in slot 3 of the Apple IIe when another card is installed in the auxiliary slot. While this is generally the rule, there is an exception.

Videx's UltraTerm is the only 80-column card that will work in slot 3—even if there is another card in the auxiliary slot. With compatible software, such as Word Juggler IIe and Multiplan 1.07, the UltraTerm's 128-column by 32-line display can be used in conjunction with the extra memory of the Apple extended 80-column card. For programs that exclusively use the Apple 80-column card (PFS series for the IIe), an optional switch plate is available to toggle between the UltraTerm and the Apple text card's display.

For a list of spreadsheets, word processors, and databases that utilize the expanded display features of the UltraTerm on the Apple IIe, BYTE readers should call Videx at (503) 758-0521.

William Leineweber
Videx
Corvallis, OR

High-Resolution Confusion

Dear Steve,

As a new subscriber to BYTE, I was delighted to find your Ask BYTE column as a help for the perplexed (me).

I'm hoping you can offer some desperately needed information on a most confusing subject, namely, how are high-resolution graphics created? Are they the product of hardware, software, or both?

In looking through BYTE ads, I've seen monitors, processors, software, and printers all described as possessing high resolution. For example, Quadram's QuadScreen monitor features "bit-mapped graphics (that) allow dot-addressable resolution of 960 horizontal by 512 vertical (pixels)." Wang recently introduced a desktop scanner for its Professional Computer that digitizes images at a resolution of 200 dots per inch (1728 by 2200 pixels for the maximum 11- by 14-inch image). Yet the Wang Professional Computer monitor has an advertised resolution of only 800 by 300 pixels. Many microcomputers have add-on graphics boards and image processors offering enhanced resolution; e.g., the PC Components Bi-Graphix board for the IBM PC offers 720- by 700-pixel resolution with "software support for higher resolution." Similarly, printers are rated at dots per inch with varied high-density settings for high-resolution graphics.

Just how does one go about creating high-resolution (say, 150 to 200 dots per inch horizontally and vertically) graphics hard copy? Must one have a high-resolution graphics-board-equipped computer with graphics-support software outputting through a high-resolution monitor to a high-resolution printer? Help!

Betsy McCloskey
Los Angeles, CA

Producing a high-resolution graphics display with a microcomputer depends primarily on features built into the hardware, but software is required to drive the hardware to achieve the desired display characteristics. This is usually in ROM when it is included as a standard feature of a personal computer.

First, a microcomputer that can produce graphics has a video-display controller with graphics capability and enough screen memory to produce a bit-mapped image with the desired resolution built into it. The controllers used these days are usually one-chip integrated circuits that can produce either graphics or text displays. Motorola application note AN-834 (Motorola Semiconductor Products Inc., POB 20912, Phoenix, AZ 85036) shows how the MC6845 can be used to produce a 256- by 256-pixel or 512- by 512-pixel graphics display. This chip is also used in the IBM PC to produce 320 by 200 color graphics or 640 by 200 monochrome graphics. The actual bit map produced depends on the memory allocated and the software (or firmware) driving the display.

You can also see how another chip, the Texas Instruments TMS9918A, can be used to produce graphics with sprites in my article "High-Resolution Sprite-Oriented Color Graphics" in the August 1982 issue on page 57.

To display the high-resolution graphics requires a high-resolution monitor. The QuadScreen monitor you mentioned is a high-resolution monitor with its own graphics video-driver card, which is made to replace the display driver card in the IBM PC. This system can produce a 960- by 512-pixel display, but the usual IBM PC commercial software requires special interface routines to use this resolution, and the PC's BASICA is still limited to 640 by 200 by its own structure. More conventional 12- or 13-inch color (RGB) or monochrome monitors with 15- to 20-MHz video bandwidths are available that can make full use of the standard- or second-source video cards for the IBM PC and compatible computers, as well as many other computers with graphics built in.

Creating high-resolution graphics on paper with a printer or plotter is a different story. This doesn't even require graphics capability in the computer. All you have to do is set up an array of points to be plotted and send the points to a printer with dot-graphics capability. The programming is a little complicated because you must first define the dot array you want printed and then sort it into a form the printer can use. This usually means that you must arrange the data to be plotted in a top-down, line-by-line array. Since the print head has seven or eight print wires in a vertical column that can be used in graphics mode, the graphics lines are taken seven or eight at a time and read as columns of dots. These are coded into 1-byte characters and sent to the printer one at a time. For example, if a given position on the line needs only the top dot printed, the character sent (in BASIC) would be CHR$(1). Similarly, if all eight dots are to be printed, the character would be CHR$(255). The coding system establishes a correspondence between the wire positions and bit positions in the data byte, so that wire 1 has the same value as bit 1, wire 2 with bit 2, etc. This allows easy calculation of the character

(continued)

COPYRIGHT © 1985 STEVEN A. CIARCIA. ALL RIGHTS RESERVED.

A BUREAUCRAT'S GUIDE TO WORD PROCESSING

Now, if it were you or I and we wanted a word processing program for our IBM-type PC, we'd probably stop off at our local computer store and simply diddle with a few.

You and I, however, are not the U.S. Department of Agriculture.

(Nor any of its permutations of subsystems like the Economic Research Service, National Resources Economics Division, Data Services Center, etc., etc.)

So when the USDA told ERS to tell NRED and DSC to look into a truckload of w.p. programs for all their PCs, the last thing they wanted was simple diddling. Their dedicated Wangs and Lexitrons were far too few to handle their needs, their IBM® PCs weren't compatible with them anyway, and nobody really, quantifiably, knew from word processing with a personal computer.

Definitely not a diddling-mode condition.

As they put it in The Exchange, an internally distributed publication of the Department of Agriculture: "A needs assessment showed that, in the long-term, a word processing system is needed that can increase word processing capability and also be compatible with ERS' Long Range Information Management goals."

Well, "Needs assessment" led swiftly to "procurement action," which galloped into an "objective review" of the eight top-rated PC programs on the market (as compiled by The Ratings Book published by Software Digest), along with WordStar® and Display Write 2, because they had some around.

Thus armed with the names, the final evaluators (a team of secretaries from NRED who would be the primary users of the PC software) became armed with each of the programs, along with checklists to record such things as ease of use, advanced features, and similarity to their existing dedicated equipment.

Since NRED has some hard disk base systems, any packages that were copy-protected could not be transferred to the hard disks, and were eliminated on that basis alone. OfficeWriter™ and SAMNA WORD™ II were the first to go.

Next, IBM's Diplay Write 2: because it's "not compatible with other software used in ERS (like Lotus™ 1-2-3,™ dBase II,® etc.)," and it's "full of confusing menu options and cryptic error messages." Au revoir IBM.

Then, three more, for a variety of reasons. Which left:

Volkswriter® Deluxe™
MultiMate™
Leading Edge™

Volkswriter® Deluxe? "Too complicated and confusing." Not "easy to learn or use."

MultiMate? Not bad. It actually tied the winner in a few categories.

The winner being the one that won 82% of the votes in the Ease of Use/Ease of Learning categories. The one about which they said, "The ability to store deleted text and automatic document backup features were both highly desirable." The one they thought they'd quickly "be able to use . . . for their day-to-day word processing tasks."

The whole process took some three months of work by people in DSC to support the NRED in its work with the ERS and DSC to make the world a better place for the USDA.

But the results were well worth the wait. Because at last they've solved their word-processing problems . . .

"With Leading Edge!"

THESE ARE THE PACKAGES THE COMMITTEE EVALUATED:

THESE WERE THE FINALISTS:

THIS WAS THE WINNER:
LEADING EDGE™
LEADING EDGE WORD PROCESSING



LEADING EDGE PRODUCTS, INC.
LEADING EDGE SOFTWARE DIVISION, 21 HIGHLAND CIRCLE, NEEDHAM, MA 02194-0009 TEL. 800-343-3436, (617) 449-4655
HELP HOTLINE 800-523-HELP

IBM is a registered trademark of International Business Machines. WordStar is a registered trademark of MicroPro International Corporation. OfficeWriter is a trademark of Office Solutions Inc. SAMNA WORD II is a trademark of SAMNA Corporation. Lotus and 1-2-3 are trademarks of Lotus Development Corporation. dBase II is a registered trademark of Ashton-Tate. Volkswriter is a registered trademark and Deluxe is a trademark of Lifetree Software Inc. MultiMate is a trademark of MultiMate International Corporation. Leading Edge is a trademark of Leading Edge Products, Inc.

Inquiry 70

COMPUTER BROKERAGE SERVICES

"We do the Shopping for You"

800/233-1147

MasterCard TX Residents 713/240-5515 VISA

4242 BLUEBONNET • STAFFORD, TX 77477

MONITORS

TAXAN 121 Green/122 Amber 135/140
Direct IBM Plug In
115 Green/116 Amber 125/130
411 RGB-IBM Look Alike 365
High Res/With mono switch
425 RGB-IBM Look Alike 465
Super High Res/With mono switch
AMDEK New Color Monitors ..... CALL
310 Direct IBM Plug In ..... CALL
300 Amber/Green ..... CALL

BOARDS

TECMAR All Boards ..... SAVE$$$
TAXAN Monocard with Parallel Port 199
Color Graphics Card 165
PERSYST ..... CALL
APSTEK HandiOne Plus/1 yr. warranty 195
Same features as Six Pac Plus But Much Lower Priced Bare Memory Board 256K 120

PRINTERS

OKIDATA All Models ..... SAVE$$$
EPSON All Models ..... BEST PRICE
PANASONIC 1090 ..... LOWEST PRICE
1091 ..... CALL
TOSHIBA P1351/P1340 ..... SAVE$$$
TI 855 ..... CALL
NEC LQ PRINTERS ..... CALL
DIABLO LQ PRINTERS ..... CALL
TTX LQ PRINTER w/Pin Feed Guide 370
TTX PRINTER — same as Diablo 630 API 390

MODEMS

ANCHOR MARK XII 245
MARK X 105
MARK VII 89
HAYES ..... CALL

DISK DRIVES

TANDOM TM100-2 ..... 165.00
TEAC HALF HEIGHT FLOPPY 175.00
I² INTERFACE Internal 10 Meg ..... CALL
External 10 Meg/Will boot from Disk SAVE$$$

COMPUTERS

THE VERY BEST PRICES
IBM PC All Configurations ..... CALL
COLUMBIA ..... SAVE$$$
COMPAQ ..... CALL

MEMORY CHIPS

64K D-RAM KITS 33.00

ACCESSORIES

SWITCH BOXES Parallel 2/3 Position .. 96/109
Serial 2/3 Position 66/84
DESK TOP PRINTER STANDS Lg./Sm. .. 29/24
DUST COVERS ..... CALL
DISKBANK MEDIA MATE 5 12
Holds 50 Diskettes
CABLES IBM PARALLEL 19
PRINTER BUFFERS ..... CALL
DISKETTES Nasua DSDD 17
SURGE SUPPRESSORS/All Types . BEST PRICE

TERMS • We guarantee our products against Manufacturer's defects. • Add 3% for shipping charges. $5.00 minimum. • Checks: Allow two weeks for clearance. • Texas orders +6% Sales Tax. • C.O.D.'s payable w/certified check, money order or cash.

Availability and prices subject to change.
IBM is a registered trademark.
APPROVED CORPORATE ACCOUNTS WELCOME.

value to produce a given pattern: simply add the values of the wires to be printed. Since the wires are in the binary sequence 1, 2, 4, 8, 16, 32, 64, and 128, the arithmetic is easy.

Printers with 150 to 200 dots per inch in both directions are available, but most of the low-cost graphics printers are in the 72- to 120-dot-per-inch range.—Steve

No Need to Modify SA-400s

Dear Steve,

In regard to your response to Claudio Pugliese's letter in the June 1984 issue (page 70) concerning Shugart SA-400s for Apples, I think there is a better solution than the one you proposed, which was to modify the SA-400s. I use the Suntronics (12621 Crenshaw Blvd., Hawthorne, CA 90250) AFDC-1 floppy-disk controller to connect two SA-400 drives to slot 6 of my Apple II+. Interfacing is as simple as plugging in the drives; at $55.95 you can't beat it. Furthermore, the drives sound like they did on the Radio Shack instead of the way the Apple drives sound when they seek track zero. The only disadvantage is that the AFDC-1 doesn't support half-tracking. I've never had a problem reading, writing, or copying regular Apple II+-created disks.

Jim Means
Lompoc, CA

SA-400–Apple Interface

Dear Steve,

Regarding an Apple II interface to a Shugart SA-400 disk drive, I have been selling the plans for one such interface for the past two years. It's a highly simplified circuit, consisting of five common TTL chips. The SA-400 PCB requires only two cuts, a resistor substitution, and a chip replacement.

For interested readers, I will supply the schematic for this interface, a parts list, complete instructions, and diagrams for $16 U.S. or $20 Canadian. Please send it to J. Cygman, 158 Leslie St., DDO, Montreal, Quebec H9A 1X3, Canada. Money orders only, please. Or call (514) 683-9392 for information.

J. Cygman
Montreal, Quebec, Canada

PCjr Screen Modes

Dear Steve,

I have an expanded IBM PCjr, and I have not been able to use screen modes 5 and 6. The BASIC manual states that you can use these modes (and others) only if you have 128K bytes and Cartridge BASIC. I have these, and I still get an illegal function call when I attempt to use these modes. I have also experienced the same problem on another PCjr with the same specifications. Can you offer an explanation or a remedy for the problem?

Chris Newbold
Lexington, MA

Before screen mode 5 or 6 can be used on the PCjr, it is necessary to allocate some memory for it. The CLEAR *command does this, among other things. The simplest way to use it is as follows:*

```
10 CLEAR , , ,32768
20 SCREEN 5
```

or

```
10 CLEAR , , ,32768
20 SCREEN 6
```

—Steve

Sons of 8086

Dear Steve,

I have been reading a lot of articles and ads in BYTE featuring computers based on the Intel 80186 microprocessor. Now Intel has introduced a new processor, the 80286. An ad in BYTE says "the 80286 is capable of supporting up to 16 megabytes of physical memory and up to 1 gigabyte of virtual memory when utilized in virtual address mode." What are the differences between the 8086, 80186, and the 80286, and how are the 80286's large memory capabilities accomplished?

Timothy Russell
Bellevue, NE

The 8086 is the first processor in the Intel 16-bit line. The 80186 and 80286 are enhancements on the 8086 and will run most or maybe all 8086 software.

The 80186 is a more integrated system than the 8086 in that it includes, on the chip, most of the "glue" parts that are added externally in 8086 applications, such as timers, interrupt controller, and DMA controller. It also includes a few new instructions like PUSHA and POPA, which push and pop all registers at once, and INS and OUTS for strings. Instruction execution times are the same as the 8086, and clock speeds up to 8 MHz are available. Addressing capability is the same as the 8086.

The 80286 represents evolution of the 8086 family in a different direction. This processor is designed for multiuser sys-

(continued)



Maxell Gold.

The floppy disk that lets PC AT™ speed ahead, makes PC/XT™ X-traordinary, and helps IBM® PC™ capitalize on its powers.

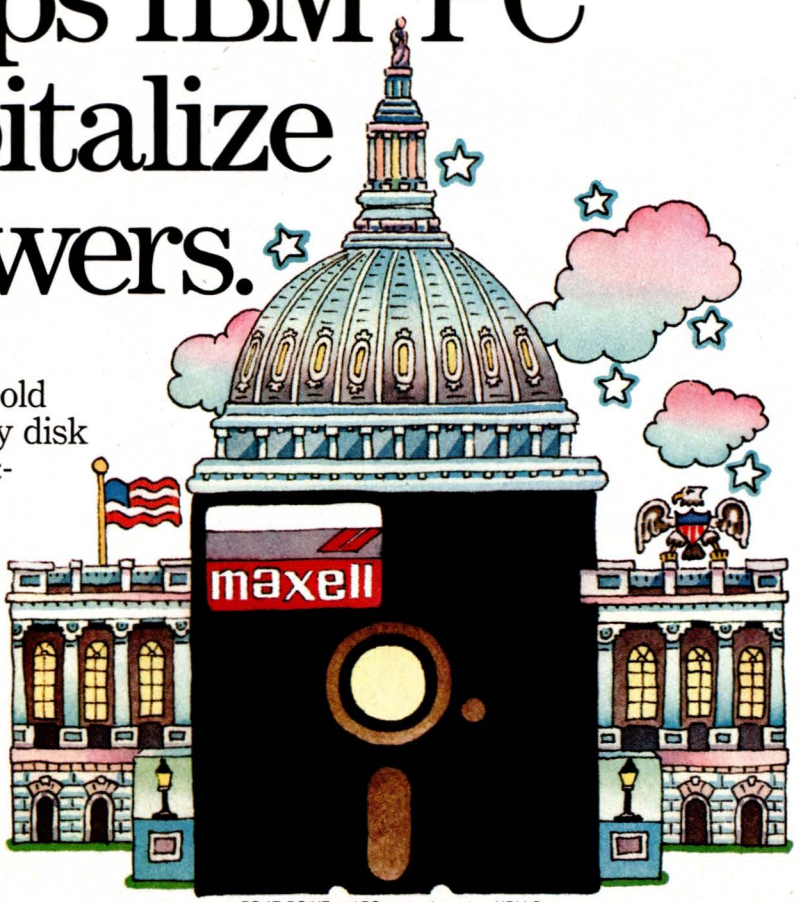

For your Big Blue, only the Gold Standard will do. Maxell. The floppy disk chosen by many disk drive manufacturers to test their new equipment. Each Gold Standard is backed by a lifetime warranty. And each is a perfect match for your IBM. In fact, there's a Gold Standard for virtually any computer made. Even if it's the new IBM PC AT!

maxell®
IT'S WORTH IT.

PC AT, PC/XT and PC are trademarks of IBM Corp.

Maxell Corporation of America, 60 Oxford Drive, Moonachie, N.J. 07074

Inquiry 220



Fill your IBM XT or Portable's half-size expansion slot with the only 1200 baud internal modem designed for it: The Ven-Tel Half Card.™ Under $500 from MTI.

The Half Card™ includes the most popular communications software, Crosstalk XVI from Microstuf.

This same modem also works in the IBM PC, the Compaq, and the Panasonic Senior Partner.

MTI is an authorized distributor for Ven-Tel. And we honor Visa and MasterCard. Whether you buy, lease or rent, MTI is the one source for all the computer and data communications equipment, applications expertise and service you'll ever need. At great prices. Call us.

mti systems

A DUCOMMUN SUBSIDIARY

Computer & Data Communications Equipment
Sales / Leasing / Service / Systems Integration

DEC, Intel, Texas Instruments, Hewlett-Packard, Dataproducts, Diablo, Lear Siegler, Esprit, C.Itoh, Racal-Vadic, MICOM, Ven-Tel, Develcon, PCI, U.S.Design, Digital Eng., Cipher, MicroPro, Microsoft, Polygon & Select.

New York:	New Jersey:	Ohio:	California:
516/621-6200	201/227-5552	216/464-6688	818/883-7633
718/767-0677,	**Pennsylvania:**	513/891-7050	**Outside N.Y.:**
518/449-5959	412/931-9351		800/645-6530

Powerful in circuit emulation, priced well within your grasp. That's NICE.™

NICE may be only 3" square and ½" thick, but it hands you full speed, real-time emulation—over 50 emulation functions, software breakpoints, all memory addresses and all I/O ports.

Just plug NICE directly into the target MP socket and any RS232 terminal for system development, troubleshooting, debugging or testing . . . at home, in the lab or in the field.

And NICE hands you all this performance, portability and versatility for only $498*. . . . the best emulator price/performance ratio on the market, hands down.

Call in your order today using your VISA or Mastercard number: (800) NICOLET outside CA, or (415) 490-8300 in CA. Or send your check or money order to NICE, Nicolet Paratronics Corporation, 201 Fourier Avenue, Fremont, CA 94539.

*Payment by check, money order, VISA or MasterCard.

NICE is a trademark of Nicolet Paratronics Corporation
®Z80 is a trademark of Zilog, Inc.

Nicolet



NOW AVAILABLE—NICE for the Z80
COMING: NICE 8085—Sept. '84
NICE NSC800—Oct. '84
MORE TO COME!!

tems and has direct addressing for up to 16 megabytes of memory. This is accomplished with a 24-line address bus. This chip also has an enhanced instruction set and protection features to prevent actions by one user from interfering with another or to prevent unauthorized access to specific files (memory areas). Up to 16,383 memory areas can be defined with lengths between 1K and 64K bytes. Calls and jumps within and across protection boundaries and between tasks in multitask applications are included in the instruction set.

The virtual-memory addressing range is up to 1 gigabyte for each user. This is accomplished by providing most of the required capacity on hard disks and transferring blocks in and out of physical memory under control of the processor's memory-management program. This is transparent to the user, so that it appears to be the same as "real" memory, although each user gets only as much physical memory as is needed.

Virtual memory can be done in a limited fashion with the 8086 and other processors, but the 80286's architecture and instruction-set enhancements are optimized for this application.—Steve

HARDWARE-OS INTERFACING

Dear Steve,

I am an engineer who specializes in digital hardware. I intend to build a home computer. My problem is that I do not know how to interface my hardware to an operating system. Can you help?

RICHARD GOODRICH
Richardson, TX

Interfacing between the operating system and the hardware was discussed briefly in my article "Build the Circuit Cellar MPX-16 Computer System, Part 3" in the January 1983 BYTE (page 54). As mentioned in that article, the CP/M-86 manuals from Digital Research give the details of writing the BIOS, which is basically a set of device drivers that provides the interface between the operating system and your specific hardware.

The IBM PC Technical Reference Manual *gives a good example of a BIOS for 8088/8086-based systems in Appendix A. This contains many of the interrupt-service routines used by the PC for I/O to the keyboard, printer, serial ports, disk drives, and screen as well as the bootstrap loader.*

A few books on operating systems are

(continued)

Need RGB color and TTL monochrome support from a single board?

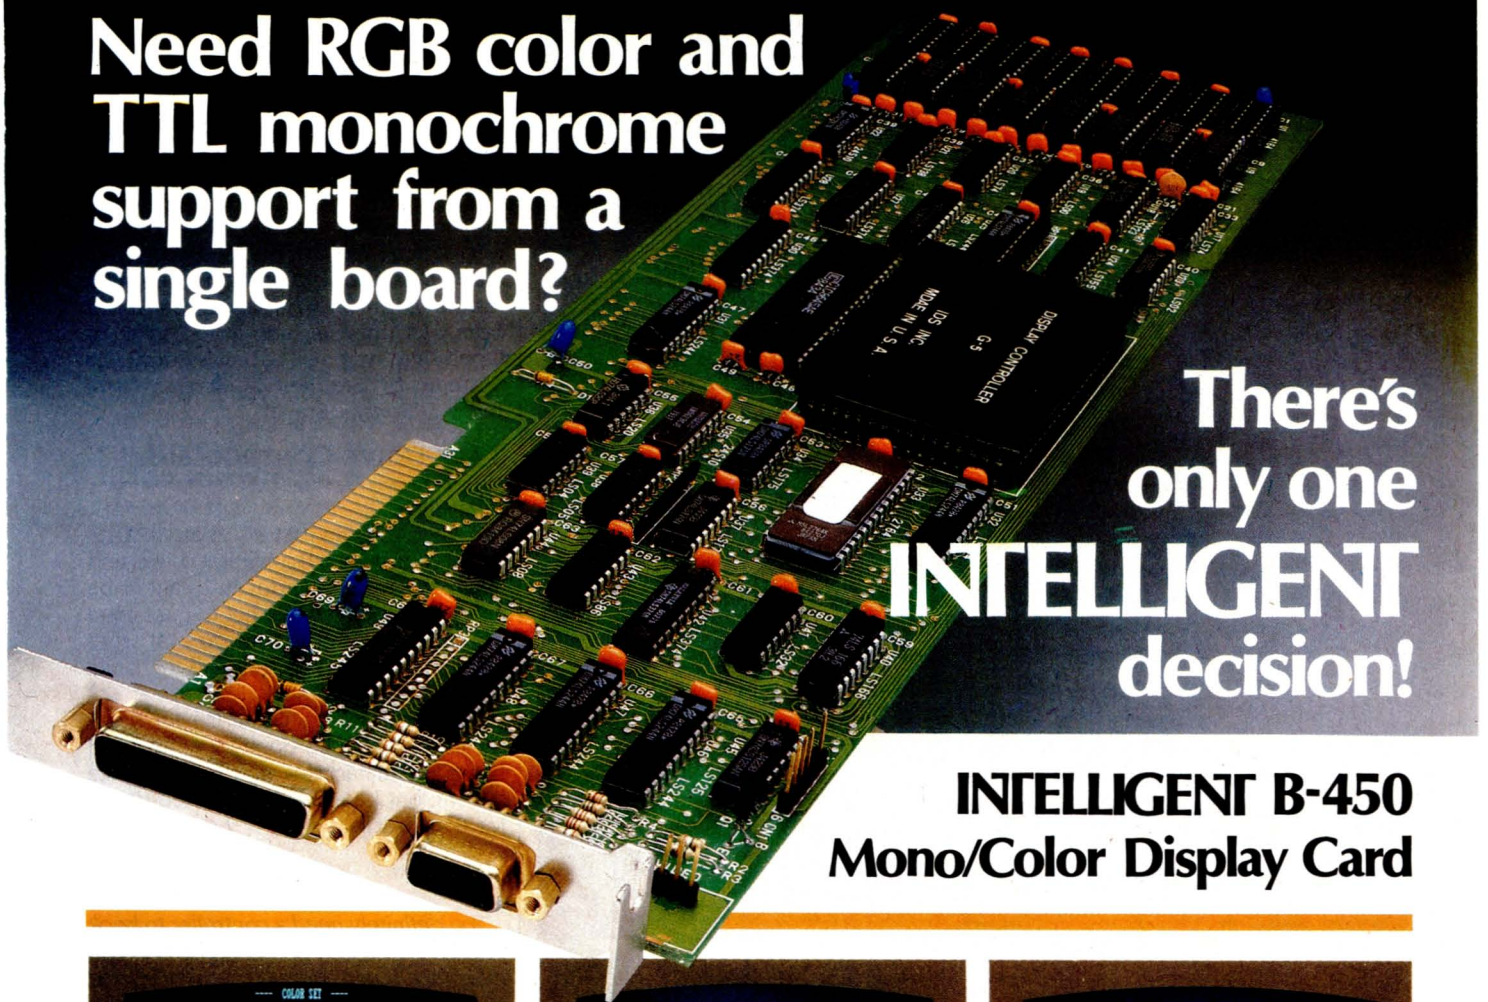

There's only one INTELLIGENT decision!

INTELLIGENT B-450 Mono/Color Display Card

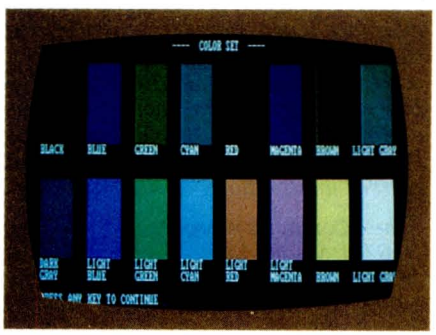

Color Graphics Mode: 640 dots × 200 lines

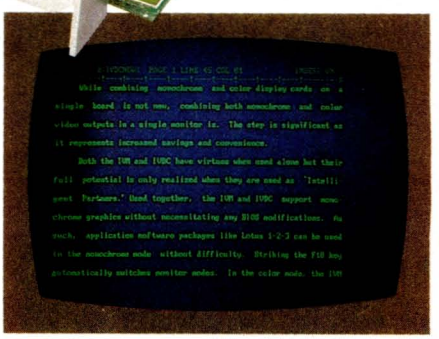

TTL Monochrome Mode: 640 dots × 350 lines

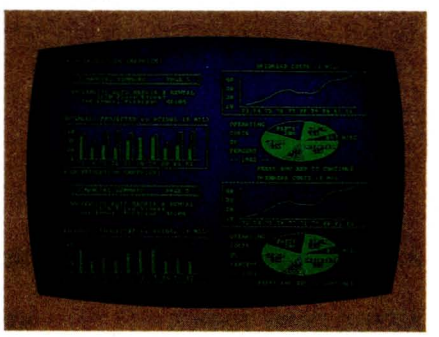

Interlace Mode: 640 dots × 400 lines

Look no further, the INTELLIGENT B-450 has it all. Designed to work with the IBM PC, PC XT, and PC AT, the INTELLIGENT B-450 is also suitable for IBM PC look-alikes. In addition to a parallel printer port, the B-450 has fourteen different screen modes which cover everything from medium-resolution monochrome text to high-resolution color graphics with interlace.

Everyone from the ordinary user to the CAD/CAM specialist will find the B-450 is just right.

Sound good? With a suggested retail price of only $294, it's nothing less than great!

IBM and IBM PC are registered trademarks of International Business Machines Corporation.

INTELLIGENT DATA SYSTEM

Intelligent Data System, Inc.
14932 Gwenchris Ct., Paramount, CA 90723
Toll Free Tel:(800)325-2455 Calif. Tel: (213)633-5504 Telex: 509098

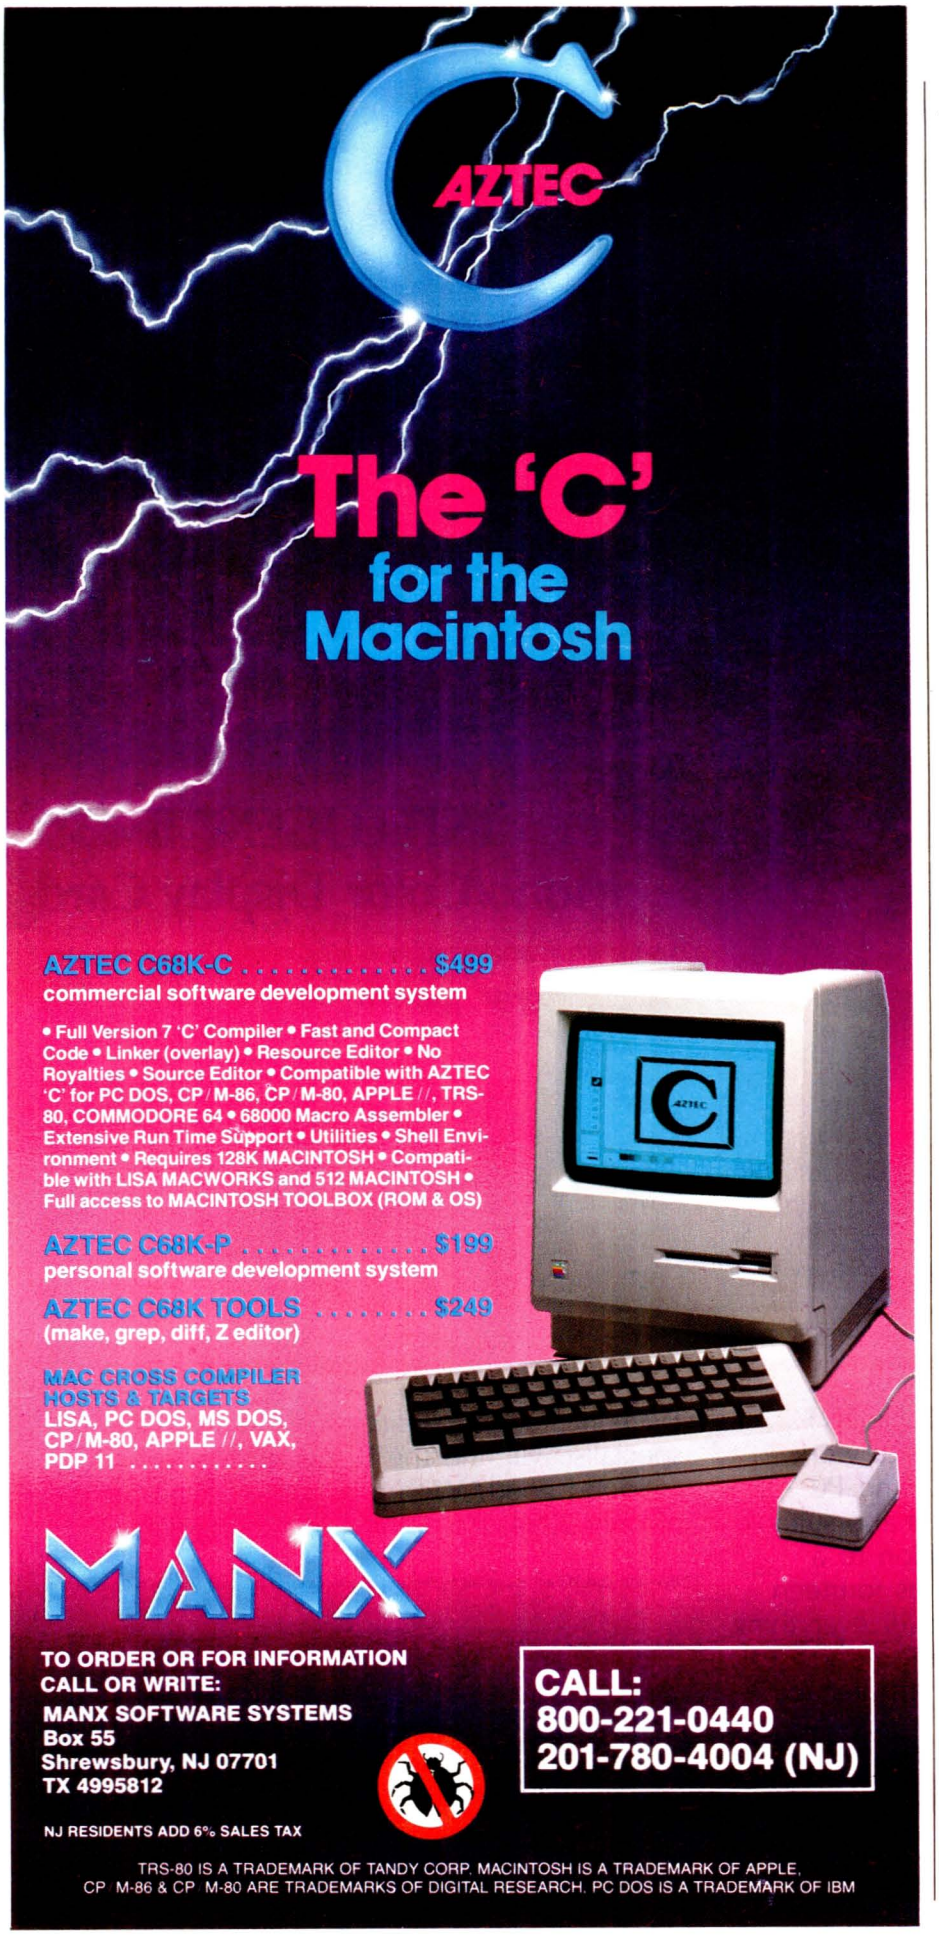

available. Three you might check out are Microcomputer Operating Systems *by Mark Dahmke,* Operating Systems *by Harold Lorin and Harvey Deitel (both from McGraw-Hill), and* The Design of Operating Systems for Small Computer Systems *by Stephen H. Kaisler (John Wiley & Sons).*—Steve

Tape-Drive Controllers

Dear Steve,

I plan to buy an IBM PC or an MPX-16. I want to have two floppy-disk drives and two IBM 9-track tape drives. I want to be able to format the tapes, not just use them as streaming backup. I do not care whether a mainframe can read my tapes or vice versa.

Where can I get a controller for these drives, or can it be done by software? I know a manufacturer who makes a nice system, but I am thinking of used drives for $500 each.

Roger Cain
Ottawa, Ontario, Canada

You definitely need a controller to hook 9-track drives onto a PC. Luckily, several manufacturers make such controllers and the software to go with them. I have not used these products, so I can't tell you how well they perform. These controllers are in the $500 to $1000 price range. Contact the manufacturers directly to get current information.

Ibex Computer Corp.
20741 Marilla St.
Chatsworth, CA 91311
(818) 709-8100

Innovative Data Technology
4060 Morena Blvd.
San Diego, CA 92117
(619) 270-3990

Good luck with your project.—Steve ■

IN ASK BYTE, Steve Ciarcia answers questions on any area of microcomputing. The most representative questions received each month will be answered and published. Do you have a nagging problem? Send your inquiry to

Ask BYTE
c/o Steve Ciarcia
POB 582
Glastonbury, CT 06033

Due to the high volume of inquiries, personal replies cannot be given. All letters and photographs become the property of Steve Ciarcia and cannot be returned. Be sure to include "Ask BYTE" in the address.

The Ask BYTE staff includes manager Harv Weiner and researchers Bill Curlew, Larry Bregoli, Dick Sawyer, and Jeannette Dojan.

Inquiry 215



C COMPILERS FOR
PC DOS MS DOS CP/M-86 CP/M-80 APPLE *II, IIe, IIc*
COMMODORE 64 RADIO SHACK and MACINTOSH



AZTEC C86 NEW RELEASE

Optimized "C" compiler for PC DOS, MS DOS & CP/M-86
PC DOS, UNIX I/O, math, screen, graphics libraries
8086 assembler, linker & librarian, overlays
/PRO—library source, debug, ROM, MASM & RMAC, 8087, large model

NEW C COMPILERS

AZTEC C68K for MACINTOSH
VAX cross compilers



AZTEC C II NEW RELEASE

Optimized "C" compiler for CP/M, TRSDOS & LDOS
assembler, linker & librarian, overlays, utilities
UNIX I/O, math & compact libraries
/PRO—library source, ROM, M80 & RMAC

C TOOLS & AIDS

Z editor (like Vi), C TUTOR compiler, PHACT database,
C GRAFX, UNI-TOOLS I, QUICK C, BABY BLUE for PC
to CP/M cross, QUADLINK for PC to APPLE cross

AZTEC C65

"C" compiler for APPLE DOS 3.3, ProDOS or COMMODORE 64
VED editor, SHELL, UNIX & math libraries
/PRO—library source, ROM, overlays





CROSS COMPILERS

Compile & link on HOST—test on TARGET machine
HOSTS: UNIX, PC DOS, CP/M-86, CP/M-80, VENIX, PCIX, APPLE
TARGETS: PC DOS, CP/M-86, CP/M-80, APPLE, RADIO SHACK,
COMMODORE 64, other hosts and targets available



PRICES

AZTEC C86 C COMPILER	
PC DOS MSDOS	249
CP/M-86	249
BOTH	399
C86/PRO	499
/PRO UPGRADE	250
Z (VI EDITOR)	125
C TUTOR COMPILER	99
PHACT DATABASE	299
C GRAFX	99
SUPERDRAW	299
UNI-TOOLS I	99
QUICK C	125

AZTEC C II C COMPILER	
CP/M	199
CII/PRO	349
/PRO UPGRADE	150
TRS 80 MODEL 3	149
TRS 80 MODEL 4	199
TRS 80 PRO (3 & 4)	299

AZTEC C65 C COMPILER	
APPLE DOS 3.3	199
PRODOS	CALL
E EDITOR	99

AZTEC C CROSS COMPILERS	
PDP-11 HOST	2000
PC DOS HOST	750
CP/M-86 HOST	750
CP/M-80 HOST	750
APPLE HOST	750
VAX HOST	CALL
MACINTOSH	CALL

TARGETS
PC DOS
CP/M-86
CP/M-80
APPLE
RADIO SHACK
COMMODORE 64
MACINTOSH

TRS 80 RADIO SHACK TRS DOS is a trademark of TANDY.
APPLE DOS MACINTOSH is a trademark of APPLE.

MANX SOFTWARE SYSTEMS
Box 55
Shrewsbury, NJ 07701
TELEX: 4995812



TO ORDER OR FOR INFORMATION:
CALL: 800-221-0440 (outside NJ)
201-780-4004 (NJ)

Australia: Blue Sky Industries — 2A Blakesley St. — Chatswood NSW 2067 — Australia 61-2419-5579
England: TAMSYS LTD — Pilgrim House — 2-6 William St. — Windsor, Berkshire SL4 1BA — England — Telephone Windsor 56747
Shipping: per compiler next day USA $20, 2 days USA $6, 2 days worldwide $75, Canada $10, airmail outside USA & Canada $20
UNIX is a trademark of Bell Labs. CP/M, CP/M-80 and CP/M-86 are trademarks of DRI. PC DOS is a trademark of IBM. MS DOS is a trademark of MICROSOFT.
N.J. residents add 6% sales tax.

Three of today's most popular computer accessories.



Tylenol® is a registered trademark of McNEILAB, INC. Visine® and Ben-Gay® are registered trademarks of Lemming Division, Pfizer Inc.

Do you ever get the feeling that computers are treated with more respect than people?

Everyone talks about technology.

But what about the people who have to use it?

Quite clearly, they're having problems.

Industry publications like PC Magazine have written about those problems.

And now, more than twenty states are currently preparing special computer legislation to force some changes.

You are not a machine.

Computers are designed by engineers.

They usually know a lot about technology but very little about people.

Which is why so many computers often are technically impressive yet strangely unnatural to use.

Computer-induced problems (%)	
Eye strain	55%
Back pain	43%
Headaches	30%
Shoulder	25%
Hand/wrist	18%
Neck pain	15%

(Source: "Ergonomic Principles in Office Automation" Pub. 1983 by E.I.S. AB, Sweden.)

The result has been a whole range of computer-induced problems ranging from stress and fatigue to blurred vision.

In Sweden, they have an attitude the world is just catching up with.

It's this:

That the machine is the servant of man.

Not the other way around.

That excellent ergonomic design isn't a privilege.

It's a right.

That ergonomics isn't just a noble gesture.

It's good business.

Because computers are only as fast and as accurate as the people who operate them.

If they suffer, so does business.

This attitude has made Ericsson No. 1 in Europe twice over:

First, as the giant of European telecommunications.

Then again as Europe's biggest workstation company by far.

(You couldn't ask for a better marriage of technology for the future.)

Here is one example of how Ericsson got there.

It's the first of a range of computers being introduced in the U.S.A.

The Ericsson PC. It's Ergo-Intelligent.™

Ericsson has spent $300 million finding ways to make people and computers work better together.

Here are some of the results.

Ergo-Screen.™

Aspirin gets rid of a headache.

Ergonomics gets rid of the cause.

The Ericsson PC has a non-glare screen with restful amber characters on a specially developed, low-fatigue background color.

Even the shape of the characters was specially developed to allow easier recognition of difficult letters like O and Q.

On the monochrome monitor, the resolution is double that of IBM's, so clarity is remarkable.

You can even have text and graphics on the same screen.

Ergo-Arm.™



Thousands of people get neck and back pain from inadequate screen height and angle adjustment.

The Ericsson Ergo-Arm lets you move your screen exactly where you want it.

Ergo-Touch.™

Ericsson keys are full-size, and the layout is ergonomically planned for greater speed and accuracy.

Yet the keyboard is 20% more compact and less than half the weight of IBM's.

Even the cord is adjustable to suit left- or right-handers.

Ergo-Color.™

Even the color of the case is ergonomically selected to be restful on the eye over many hours.



Ergo-Space.™

The system unit is one-third smaller than IBM's.

It even fits under your desk in a special vertical rack.

So your desktop is your own again.

IBM Compatible.

Many companies claim to be compatible.

Some are. Some are stretching the truth.

The Ericsson PC boasts the highest compatibility rating there is.

It's operationally compatible.

You can take advantage of thousands of PC-compatible programs already available.

In fact, with the best-selling software, program and data disks are interchangeable with those of the IBM PC.

Service. Not excuses.

Ericsson wouldn't give you anything less than on-site or carry-in service. The choice is yours.

3 Free Offers.

Ericsson will send you revealing literature on ergonomics.

Also a detailed brochure on the Ericsson PC.

And arrange a hands-on test if you ask for it.

Call toll-free 1-800-FOR-ERGO.

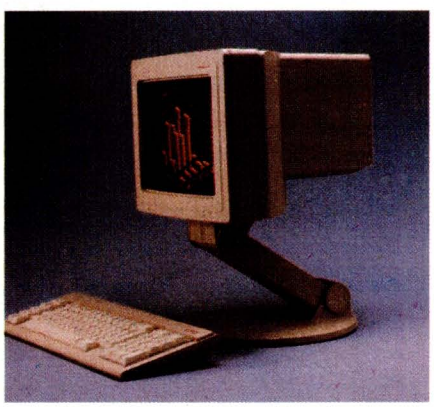

ERICSSON

IBM is a trademark of International Business Machines Corp.

Inquiry 128

Master Piece™ The 100% compatible accessory.



Master Piece is the most versatile accessory ever made for IBM Personal Computers. Master Piece combines the four most popular IBM® accessories into one elegan accessory offering the most convenience and best value available

A SWIVEL BASE
The Master Piece has a swivel so you can adjust the viewing angle your monitor with just the touch a finger. Since the Master Piece swivels with your monitor, its switches and static control are in front of you at all times.

FIVE SWITCHED OUTLETS
Stop searching for outlets to plug in your peripherals. Master Piece' five outlets put your entire syster at your fingertips. Power up with the "Master" switch, then use the individual switches to control you peripherals. Touch the "Master" switch to shut down and you'll never accidentally leave your peripherals running overnight.

SURGE SUPPRESSION CIRCUITRY
Power surges, spikes and line noi are responsible for 70–90% of all PC malfunctions. They can wipe memory in your PC, taking hours hard work with them. They can za your delicate chips, sending your PC in for costly repairs. Master Piece clips surges and spikes at a safe level. You end up with an IBI that's more accurate and reliable

STATIC PROTECTION
Even you are a threat to your IBM During the day you build up stati charges—as much a threat to yo PC as surges and spikes. Master Piece offers an elegant alternativ to expensive and unsightly static mats. Just touch its nameplate b fore you begin work and static charges are grounded.

If you bought these accessories separately, you could spend mor than $200. Master Piece's recommended retail price is under $15(Available now from IBM dealers everywhere.

Inquiry 194

KENSINGTON™ MICROWARE

251 Park Avenue South
New York, NY 10010
(212) 475-5200 Telex: 467383 KML N\

Trademarks: Master Piece/Kensington Microware Lt
IBM/International Business Machines
© 1984 Kensington Microware Ltd.

C·L·U·B·S & N·E·W·S·L·E·T·T·E·R·S

● **C-PRO IN VIRGINIA**
The bulletin board of the CompuPro Users Group is up and running at (703) 491-1852, operable via modem at 300 or 1200 bps. A remote CP/M system is also available. Members of the group produce a newsletter regularly that contains software reviews, hardware help, and tips. Annual membership is $20. Call Don Kelley at (703) 690-3312, or write Toni Bennett, C-PRO Users Group, 14057 Jefferson Davis Highway, POB 1474, Woodbridge, VA 22193.

● **ADAM ON THE HUDSON**
Members of the Metropolitan Adam Users Group from the New York–New Jersey area meet in New York City at 7 p.m. on the second and fourth Thursdays of every month. Information and experiences with the hardware, software, and related literature are shared. At present, no dues have been set; a newsletter is in the early stages of production. Contact Russell Williams, 414 West 149th St., New York, NY 10031, (212) 208-0645.

● **BUGS ON THE WEST COAST**—The Basis Users Group Sacramento (BUGS) meets at 7 p.m. on the first Sunday of every month at the Shoreline Software Center in Sacramento, California. A magnetic newsletter allows members to exchange technical notes for a $5 fee. A membership is $20. Contact Ms. Leslie Carroll, BUGS, 125 Faro Ave., Davis, CA 95616.

● **THE MAC IN L.A.**
The Los Angeles Macintosh Group promotes the exchange of information, offers help to all levels of users, and provides a forum for people to hear about new products from company representatives. Details are available from Eric Anderson, 12021 Wilshire Blvd., #405, West Los Angeles, CA 90025, (213) 392-5697.

● **LOGO NEWS OFFERS PEN PALS**—The *National Logo Exchange (NLX)* is a newsletter for teachers that covers techniques and philosophies from successful Logo teaching programs. The subscription is $25 in the U.S., Canada, and Mexico for the eight-month school year. The newsletter also provides a Logo Class Penpal Network, which enables both students and teachers to exchange ideas and projects during the school year. To receive an application, send a legal-sized, self-addressed, stamped envelope to the Logo Class Penpal Network at the address below. For details about the newsletter, contact the *National Logo Exchange*, POB 5341, Charlottesville, VA 22905.

● **PHOENIX SENDS TELEGRAM**—The National Phoenix User Group Newsletter, *CBTelegram*, contains technical support, news from Goal Systems, details about the formation of regional groups, and notes about past conferences. Efforts have been made to raise funds at national events to provide members with biannual meetings. The National Phoenix User Group is funded and operated by users. Goal Systems provides free advertisements, the cost of producing the newsletter, and support for user groups associated with the Phoenix. Send inquiries to the National Phoenix User Group, POB 14623, Cleveland, OH 44114.

● **DEC DRIVE**
The Association of DEC Professionals (ADP) welcomes interested DEC programmers and system managers as new members for 1985. For information, send your title, model, and operating system for your DEC system along with a self-addressed, stamped envelope to ADP, POB 81045, Atlanta, GA 30366.

● **ROBOTIC CONSUMER**
A monthly newsletter designed for manufacturing managers, *Robotics Forum: Management Issues in Manufacturing*, addresses issues on manufacturing and industrial robots. Nontechnical, user-oriented articles, covering such topics as fiscal justification and the myth of turnkey systems, assist managers in making informed decisions. The annual subscription fee is $125. For information, contact the editor, Jay Goldstein, *Robotics Forum: Management Issues in Manufacturing*, POB 123, Lorane, OR 97451, (503) 683-4445.

● **SLUG IN PULLMAN**
The Sanyo Lovers' Users Group (SLUG) is an MS-DOS group designed to provide technical support for users of the Sanyo MBC series in the Moscow, Idaho/Pullman, Washington area. Members can benefit from regular meetings and access to a public-domain software library. Contact Michael Russell, POB 2084 CS, Pullman, WA 99163, (509) 878-1714.

● **NEWS FOR MEDICAL SCIENTISTS**—The New York University Medical Center Personal Computer Users Group maintains a public-domain software library that specializes in programs of interest to medical scientists. Information on how to access the group's bulletin-board service and library can be obtained by contacting Dr. James Mihalcik, Department of Anesthesiology, University Hospital, 550 First Ave., New York, NY 10016.

● **A PAL IN HAL**
The Houston Area League of PC Users (HAL-PC) is a group for users of the IBM PC and its compatibles. Benefits include a public-domain software library, a monthly newsletter that includes software reviews, and more than a dozen special-interest groups. Members of the club are in the process of setting up a bulletin-

(continued)

CLUBS & NEWSLETTERS *is a forum for letting BYTE readers know what is happening in the microcomputing community. Emphasis is given to electronic bulletin-board services, club-sponsored classes, community-help projects, field trips, and other activities outside of routine meetings. Of course, we will continue to list new clubs, their addresses and contact persons, and other information of interest. To list events on schedule, we must receive your information at least four months in advance. Send information to BYTE, Clubs & Newsletters,* POB 372, *Hancock*, NH 03449.

COMPUTERBANC

EXPAND YOUR ACCOUNT ... SAFELY!

GET SERIOUS. STOP PAYING HIGH PRICES NOW!

THOUSANDS OF AVAILABLE ITEMS. CALL FOR COMPLETE PRICING.

SYSTEMS

IBM PC
256K, Two 360KB Disk Drives, Color Graphics/Monochrome Graphics board, Parallel Printer Port, Monochrome Display (Amber/Green), DOS 2.1.
LIST PRICE $2950.00 — ONLY $2095.00

CALL FOR OTHER BUNDLED SYSTEMS

SUPER XT **$2795.00**

IBM SOFTWARE

LOTUS 1-2-3 ..... **$299.00**
LOTUS Symphony **449.99**
MICROPRO Wordstar **249.00**
ASCII Express For IBM **125.00**
Wordstar Professional **359.00**
Infostar **249.00**
Multimate **269.00**
MICROSOFT Word **229.00**
Word W/Mouse **279.00**
Multiplan **139.00**
Project **159.00**
ASHTON TATE Friday **179.00**
dBASE II **280.00**
dBASE III **359.00**
Framework **389.00**
LIFETREE SOFTWARE Volkswriter .. **119**
Volkswriter Deluxe **169.00**
FOX & GELLER Quickcode **139.00**
dUtil **59.00**
dGraph **149.00**
MICRORIM Rbase:4000 ..... **295.00**
PFS Write **89.00**
File **89.00**
Report **89.00**
Proof **79.00**
Access **79.00**
ENERGRAPHICS **269.00**
NORTON UTILITIES **59.00**

IBM HARDWARE

AST Six Pack Plus 64K **259.00**
MegaPlus II **259.00**
PC Net 1 Starter Kit **830.00**
QUADRAM Quadboard 0-K **219.00**
Quadcolor I or Microfazer 64K **205.00**
Quadlink **479.00**
MICROSCIENCE
10MB Winchester **859.00**
HERCULES Mono Graphics **329.00**
Color Card **199.00**
PLANTRONICS Colorplus **389.00**
STB Rio plus 64K **249.00**
Super Rio **259.00**
Graphix +II NEW **309.00**
TEAC 55B **135.00**
55F **180.00**
TANDON TM100-2 ..... **179.00**
TALL GRASS
12MB External W/Tape **2799.00**
RAM 64K upgrade **35.00**
MOUSE SYSTEMS Optical Mouse ... **189**
ALSO - XCOMP, PERSYST, ORCHID, TITAN AND OTHERS

PRINTERS LETTER QUALITY

BROTHER HR-15 ..... **375.00**
HR-25 ..... **629.00**
HR-35 ..... **859.00**
JUKI 6100 ..... **429.00**
NEC 2030 ..... **659.00**
2050 ..... **799.00**
3530 ..... **1229.00**
3550 ..... **1539.00**

PRINTERS DOT MATRIX

STAR MICRONICS Gemini 10X ... **259.00**
Gemini 15X **389.00**
EPSON RX-80 F/T **329.00**
FX-80 ..... **359.00**
FX-100 ..... **669.00**
OKIDATA 92A **389.00**
93A **649.00**
84A **949.00**
PANASONIC 1091 ..... **CALL**
TOSHIBA 1350-P **1399.00**
EPSON LQ1500 ..... **1299.00**

MONITORS

AMDEK 300 ..... **129.00**
300A **145.00**
310A **169.00**
Color I+ **269.00**
Color II **459.00**
TAXAN Composite Amber **119.00**
121/122 ..... **149.00**
420 (RGB) **439.00**
415 (RGB) **489.00**
PRINCETON GRAPHICS HX-12 ... **469.00**
SR-12 ..... **649.00**
MAX-12 ..... **189.00**
ZENITH ZVM-122 Amber **95.00**
ZVM-123 Green **95.00**
NEC 1201 Hi Res Green **139.00**
1205 Hi Res Amber **139.00**
1206 Green **99.00**
JC1216 Color **359.00**

MODEMS

HAYES 1200 ..... **469.00**
1200B **389.00**
300 ..... **199.00**
Micromodem //e **219.00**
ANCHOR Mark X **109.00**
Mark XII **259.00**
Volksmodem **59.00**
NOVATION Smart Cat Plus ..... **CALL**
Access 1-2-3 ..... **419.00**
Apple Cat II **239.00**
J-Cat **99.00**
U.S. ROBOTICS PC Modem **365.00**
Password **349.00**
PROMETHEUS Promodem 1200.. **329.00**

APPLE PRODUCTS

MICRO SCI AZ drives **179.00**
RANA ELITE 1 ..... **219.00**
TEAC drive **189.00**
APPLE Compatible drive **169.00**
WESPER Interface **69.00**
BUFFERED 16K **139.00**
SYSTEM SAVER Fan **69.00**
MICROSOFT Premium //e **279.00**
Softcard CP/M **29.00**
Multiplan **129.00**
MAC Multiplan (MacIntosh) **129.00**
Basic (MacIntosh) **109.00**
APRICORN Serial Card **69.00**
Z-80 Card **59.00**
ASCII Express Professional **89.00**
MAXELL S/S **19.00**
D/S **27.00**
KOALA Touch Tablet **79.00**
HAYES Mach III JoyStick **39.00**
THUNDERCLOCK **119.00**
MOCKINGBOARD ..... **CALL**
APPLEMOUSE II **129.00**
VIDEX Ultraterm **179.00**
80 COLUMN/64K Interface //e only **99.00**
80 COLUMN Card II+ only **59.00**

WE SUPPORT THESE FINE SYSTEMS: Apple, Compaq, IBM, Sanyo and many more.

TELEX #550757/ANSWER BACK-COMPUTERBNK UD

VISA MasterCard **714/841-6160**

COMPUTERBANC

16783 Beach Blvd., Huntington Beach, CA 92647

All products are in factory sealed packages. We guarantee all items for 30 days. Within this period, defective merchandise returns must be accompanied by RMA number. All other returns will be subject to a 10% restocking fee. For prepaid orders, there will be a 3% shipping charge; 5% for UPS Blue Label, $5.00 minimum; all orders outside U.S.A. at 15% shipping. There will be an additional $4.00 surcharge on C.O.D. orders. Cash or Cashiers check is required on C.O.D. orders. California residents add 6% sales tax. Prices subject to change without notice.

© Copyright 1984 COMPUTERBANC All Rights Reserved

CLUBS & NEWSLETTERS

board service. Meetings are held at 7:30 p.m. on the first Tuesday of every month at the Radisson Inn in Houston, Texas. The annual dues are $25. For details, write the Houston Area League of PC Users, POB 610001, Houston, TX 77208.

● OSBORNE IN BOULDER

The Boulder Osborne Users Group (BUG), affiliated with the Denver Osborne Group (DOG), offers support to owners of the Osborne through monthly meetings and DOG's monthly newsletter. People interested in portable computers or the CP/M disk operating system are welcome. Meetings are held at 7 p.m. on the second Wednesday of every month in Room 224 of the University of Colorado's Business School Building in Boulder. Contact Bruce Keith, Boulder Osborne Users Group, 715 South 45th St., Boulder, CO 80303.

● PROS ORGANIZE

The Association of Computer Professionals (ACP) is a nonprofit, educational organization designed for the mutual benefit of programmers, software developers, hardware designers, consultants, and other professionals in the microcomputer field. The newsletter, *ACP NEWS$*, contains an exchange of information to promote members' effectiveness and career interests. Contact Sy Bosworth, ACP, Suite 460, 230 Park Ave., New York, NY 10169, (212) 599-3019.

● ILLINOIS USERS HELP

The Champaign County Computer Club (CCCC) meets at 7:30 p.m. on the first Wednesday of every month to support new or experienced users with computers ranging from Apple to Zenith. Members benefit from special-interest groups, computer classes, a constantly updated public-domain software library of DOS and CP/M disks, and a monthly newsletter. The $12 annual dues also include access to a 24-hour bulletin-board service at (217) 359-9577. Contact Jim Mullen, 1004 Kinch, Urbana, IL 61801, (217) 344-2178.

● SPECIAL SIG

The Gila Valley Apple Growers Association operates a free voice help line for users of the Applewriter IIe at (602) 428-4073. For information, write to the Gila Valley Apple Growers Association, POB 809, Thatcher, AZ 85552.

● A ROOM WITH TERMINALS—The Stanford/Palo Alto Users Group for the IBM PC meets at 7 p.m. on the last Wednesday of each month in Polya Hall, the computer science auditorium of Stanford University. Members can see demonstrations on the terminals at each desk. The club maintains a public-domain software library, produces a monthly newsletter, and opens its membership to the community. The annual fee is $25. Write to the Stanford/Palo Alto Users Group for the IBM PC, POB 3738, Stanford, CA 94305, (415) 326-7006.

● 3000 FILES ON LINE

New releases, communications, and utilities for Apple, Osborne, IBM PC, CompuPro, and 16-bit computers are available on a nonprofit public-domain, 24-hour remote CP/M system. The SiMMS (Silicon Multiple Message System) Network Headquarters runs on a CompuPro 816 with a 40-megabyte hard-disk drive. To register, send a six-digit password and $25 to SiMMS Headquarters, Silicon Valley Interchange RCP/M Registration, POB 532, Cupertino, CA 95015. ■

Inquiry 80

PERSONALITY PROBLEM?

UNIX™ and DOS™ At the Same Time!



Looking at an IBM PC/AT? Happy with DOS but want UNIX? Happy with UNIX but want DOS? Want them working together?

Get The Connector!™

The Connector is a revolutionary product that allows DOS applications to run on the IBM PC/AT or XT under VENIX/86 (the first licensed AT&T UNIX operating system for the IBM PCs) or PC/IX. That means you can add one or more terminals to your AT which run programs using multi-user VENIX/86 to share the disk and printer. Switch between UNIX and DOS at the console with a single command. And run more than one task simultaneously. Like running a spelling check in the background while you print a report and run Lotus 1-2-3™ or dBaseII™.

Get yourself an AT and load it with VENIX. Collect your DOS and/or UNIX applications. We'll supply The Connector. The right solution to your software personality problems.

Call for complete details.

Unisource Software Corp., Department 4109,
71 Bent Street, Cambridge, MA 02141.
Telex 92-1401/COMPUMART CAM.
617-491-1264

Also available on the PC/XT and compatibles.

UNISOURCE

Getting UNIX Software Down to Business

* UNIX is a trademark of AT&T Technologies, Inc. DOS is a trademark of Microsoft, Inc. PC/AT and PC/XT are trademarks of IBM. The Connector is a trademark of Uniform Software Systems, Inc. VENIX/86 implementation by VenturCom, Inc. 1-2-3 and LOTUS are trademarks of Lotus Development Corp. dBaseII is a trademark of Ashton-Tate.



SHE'S TEMPORARY. THE DAMAGE IS PERMANENT.

One wrong key.
The slightest slip.
And your accounts receivable are accounts irretrievable.

It can happen to you—because a leading cause of data loss is human error. If you employ people and computers, you're vulnerable.

Unless you backup your data.
Every day.
No matter what.

The smartest way to do that is with a Tallgrass HardFile™ Mass Storage System.



Shown above, the 20 megabyte HardFile with 20 megabyte tape for $2,995.

TALLGRASS SELLS MORE HARD DISK STORAGE WITH CARTRIDGE TAPE BACKUP THAN ANYONE IN THE WORLD.

Tallgrass took the industry's most reliable medium—magnetic tape—and perfected a format that's become the standard for personal computers.

We used a removable tape cartridge to store data out of



harm's way. And made two versions. Our 3000 Series HardFiles combine tape's accuracy with the enormous capacities of hard disk, providing 12, 20, 35 or 70 megabytes storage with a removable cartridge tape for backup. Our 4060 tape storage system, for personal computers with hard disks built in, supplies 60 megabytes of backup capacity.

Result: the world's best selling mass storage systems with the most reliable data protection.

The only kind to have when facing a permanent problem.

For a free brochure, your nearest dealer, and more good reasons to backup, call 1-800-228-DISK. And solve your problems permanently.

TALLGRASS® TECHNOLOGIES

COMMITTED TO MEMORY

Inquiry 344

HardFile™ and Tallgrass® are trademarks of Tallgrass Technologies Corporation. © 1984 Tallgrass Technologies.

BACK UP YOUR HARD DISK DRIVE IN 3 MINUTES*!

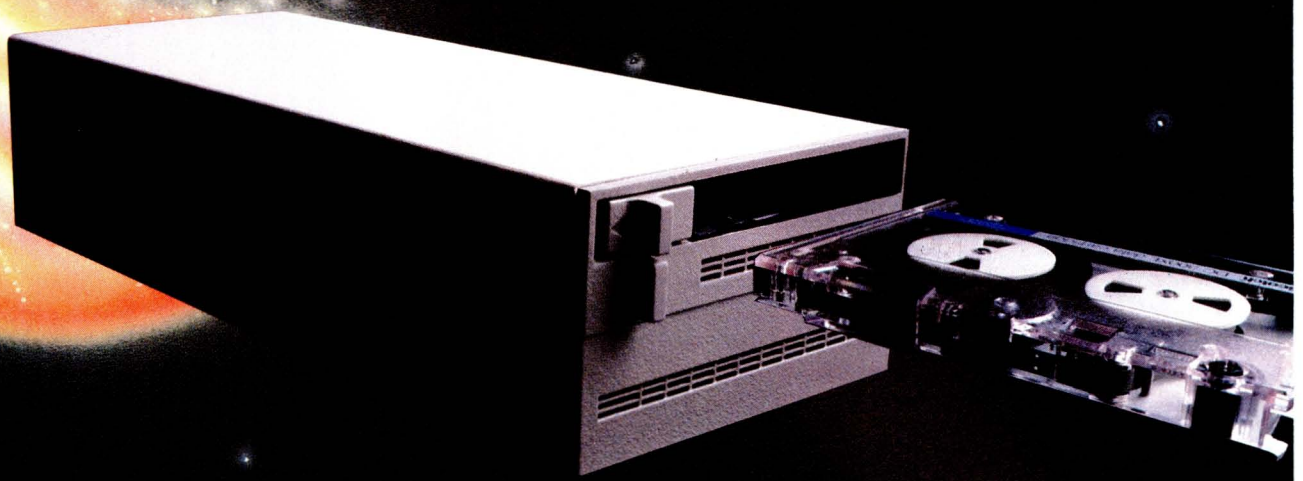

MAYNSTREAM

BY MAYNARD ELECTRONICS

- backs up IBM-PC, XT, or AT compatible hard drive of any size.
- fully portable — back up any number of systems in your office.
- simple to use — put in program diskette and type "SAVE" — it's that easy!
- unlimited storage — when cartridge is full, drop in new cartridge and keep running.
- technically advanced — features file-by-file backup, read-after-write checks, automatic directory information.
- works with:
  - — IBM-PC, XT, AT, and Portable PC†
  - — Compaq, Compaq +, DeskPro†
  - — NCR† Model 4
  - — other 100% PC-compatible systems

MAYNARD ELECTRONICS

430 E. Semoran Blvd.
Casselberry, Florida 32707 • 305-331-6402

We make modern times better.

*Actual time: 2 min/57 sec. Total files backed up: 376 consisting of 10,002,432 bytes. Computed on IBM-PC with 512K memory and one 10MB hard disk drive. Your actual back-up time may vary.

†IBM-PC, XT, AT, and Portable PC are trademarks of International Business Machines. Compaq, Compaq +, and DeskPro are trademarks of Compaq Computer Corporation. NCR is a trademark of NCR Corporation.

Australian Distributor: Dicker Data/78 Captain Cook Drive/Caringban, N.S.W. 2229/(02) 525-2122. United Kingdom Distributor: QCL/(0672) 20529. West German Distributor: Compu-Shack/Ringstrabe 56/5450 Neuwied 1/(02631) 29031/Telex 867716 CELGK. All Other European Export: Ashford International/Atlanta, GA/(404) 458-4017/Telex 15-4120 CHAMBOFCS ATL.

Inquiry 221

B·O·O·K R·E·V·I·E·W·S

THE SECOND SELF:
COMPUTERS AND THE
HUMAN SPIRIT
Sherry Turkle
Simon & Schuster
New York: 1984
362 pages, $17.95

INFORMATION SYSTEMS
SECURITY
Royal P. Fisher
Prentice-Hall
Englewood Cliffs, NJ: 1984
240 pages, $24.95

MICROPROCESSORS:
HARDWARE, SOFTWARE,
AND DESIGN
APPLICATIONS
Wunnava V. Subbarao
Reston Publishing
Reston, VA: 1984
500 pages, $29.95

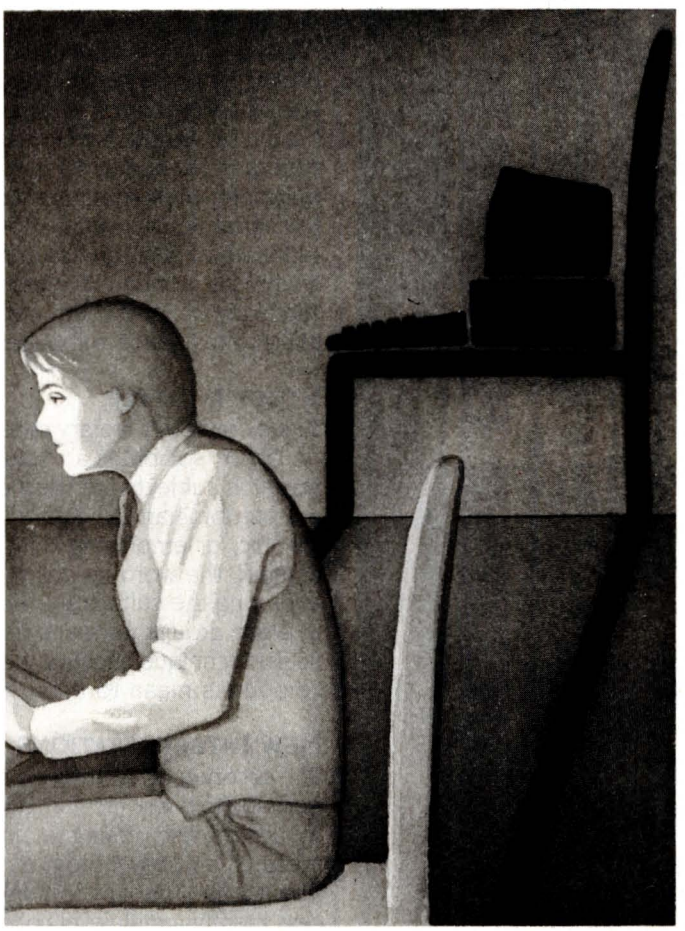

ILLUSTRATED BY JAMES STEINBERG

THE SECOND SELF

Reviewed by
Anthony Townsend

The press has focused lately on the novelty of computers, telling us what they are, and will be, capable of doing. We are told that we will see them with increasing frequency in everyday life, and that they will become a greater presence in our work and play. Rare, though, is the article or study of how computers are changing our definition of society. While sociological studies obviously take longer to research and compile than feature articles, they are no less important to the public's understanding of computers as a social force.

In *The Second Self: Computers and the Human Spirit*, Sherry Turkle, a sociologist and psychologist at the Massachusetts Institute of Technology, attempts to chronicle the impact of computers on humanity. Using six years of data and observations, she portrays the computer as an unprecedented influence on civilization, a tool that can simulate the process of the human mind.

Turkle begins by discussing the relationships that children form with microprocessor-controlled toys. Her discussions of how children interact with even the most rudimentary electronic toys show insight into how the computer is now commonplace, as television was to a previous generation.

Using children as an initial study group, Turkle explored their concepts of whether or not machines are alive. What is it about computers and electronic toys that gives them that added dimension of life? This theme is carried through the book as the author explores what it means for a person to "think" and whether a machine can be expected to perform the same process or merely mimic it.

Turkle chronicles the experiences of children at a private school where they have almost unlimited access to computers. As part of a research project, the children learned to use computers as a method of expressing themselves. Using these children as case studies, Turkle begins to develop her theory of how people interact with computers, classifying how children and adolescents use the computer. A distinction is made between "soft" and "hard" masters, a description dependent on whether the child uses the computer as an artistic tool or as a technological shortcut to play and fantasy.

In the second part of the book, Turkle focuses on how people who interact daily with computers view them. She writes about personal computer owners, hackers, and people involved in artificial-intelligence research. Although all three groups have diverse reasons for their attachment to computers, Turkle draws parallels among all three. She

(continued)

PKASO/U®

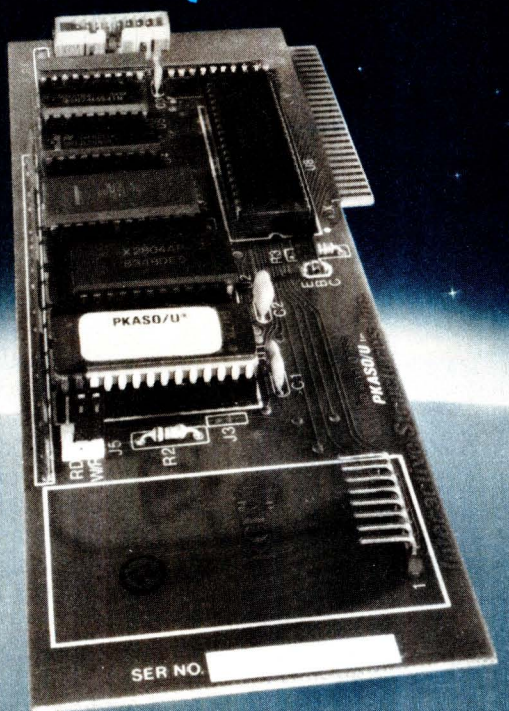

The Universal Printer Interface

Apple II, *IIe*, *III* and Apple compatible.

- Universal for virtually all standard parallel printers.
- Famous for Graphics (LoRes, HiRes, SuperRes) (Logo Compatible)
- Terrific for text (even rotates spreadsheets to print sidewards)

One set of commands for all printers. One command changes character sizes. Create your own printing fonts, alphabets and symbols . . . bold face, underline, italics, subscript and superscript, HiRes Zooming.



PLUS:

FREE Utility and Demonstration Software Disk. CLEAR, comprehensive user documentation. PKASO/U . . . for all the reasons you need an interface.

Contact us for a list of Authorized Dealers near you.

Interactive Structures, Inc.
146 Montgomery Avenue
Bala Cynwyd, PA 19004
Telephone: (215) 667-1713

postulates that computers in general have the capacity to make human beings think about themselves in a different light. This implies a more introspective process where the faculty of thought becomes the vehicle for comparing human reason to the analytical process of a thinking machine. If a machine can think (and Turkle does not imply that this is likely or probable—simply possible), then it is logical that the human race may no longer be at the top of the evolutionary ladder. Humans could boast the dubious distinction of spawning their own successors.

In the book's final section, "Into a New Age," the author ties together the research and hypotheses of the previous sections. She looks at what it may mean to think of a human being as a machine, and how this affects the human soul, psyche, and spirit in a culture where machines are quite often taken for granted. This idea dates from the Industrial Revolution, but *The Second Self* delves into the rationale of such an assumption. The advent of psychoanalysis is compared to research in artificial intelligence. Turkle implies that today's computers and tomorrow's artificial intelligence will beget a new science of the mind.

Study in Style

Turkle employs a literary style quite different from the style of other sociological volumes. Quotations from her research subjects are used extensively, and case studies are predominant. She calls her research methods ethnographic, or employing descriptive anthropology. In this context, the word means that her research consisted of exploring the culture she was studying by being present in those groups germane to her work. She uses this particular technique effectively, conveying a real sense of what computers mean to those people involved in their use.

New Interpretations

The second part of the title, *Computers and the Human Spirit*, perhaps tells the most about what Sherry Turkle is trying to accomplish. Using a unique blend of sociological research and psychological insight, she makes you think about what it means to think. Is the human thought process merely a multilevel collection of chemical processors and instructions? Can something as complex as emotion be reduced to a set series of equations, however complex? Turkle demonstrates that even the abstract activity of thinking about how we think sets us a step beyond a strictly logical perception of consciousness. She hints that computers may have been created prior to a clear understanding of the possible implications.

Turkle frequently refers to Douglas R. Hofstadter's *Gödel, Escher, Bach: An Eternal Golden Braid* (Random House, 1980) in formulating her hypotheses on how computers influence and interact with humans. Hofstadter's explanations of esoteric logic have met with wide acceptance among artificial-intelligence experimenters as a kind of symbol that even the most logical proof can be clouded in illogical ramifications. Using the culture of computers and the people involved with them as vignettes of a larger

Inquiry 177

BOOK REVIEWS

picture, Turkle attempts to reconcile the image of the computer as bound by rules with a freewheeling image of the mind that knows no boundaries. She uses paradox, as Hofstadter does, to stimulate the reader to think that just because an item can be taken for granted does not mean that item is without deeper meaning.

A New Discipline

The Second Self: Computers and the Human Spirit is a book without boundaries. Combining her expertise as sociologist and psychologist, Turkle has created an excursion into thought, a fundamental function of the human race. Authors who use such abstract and undefined parameters in writing usually end up with readers as lost as they were at the start. But Turkle's skill makes it otherwise. Although dealing with subjects as hard to quantify as computers and the human spirit, she does not allow herself to lose sight of the fact that without rational, progressive thought, nebulous concepts become just so much babble.

Because Turkle is a professor in the Science, Technology, and Society Program at MIT, this work may well be the vanguard of a growing branch of science. This young discipline is vital for perspective as computers become more a part of the fabric of human culture. A better understanding of what it means to be human is only one result of further research into this area. Sociologists, psychologists, and philosophers can benefit from examination of the principles put forth by Turkle.

The Second Self is not a book to be read lightly. It requires you to think and respond to its concepts, to postulate what it is that your mind does and how that process is changed by, and is similar to, the electronic parts of machine intelligence. I recommend Turkle's book to anyone who wants a better understanding of themselves and the culture in which they live.

Anthony Townsend (Box 7603, Charlottesville, VA 22906) is an independent microcomputer consultant and software evaluator.

INFORMATION SYSTEMS SECURITY
Reviewed by Annette Hinshaw

Royal Fisher in *Information Systems Security* outlines procedures for managers to discover potential danger spots (exposures) in information systems, develop numerical values for each exposure, and decide which security actions are most cost-beneficial. Examples, worksheets, and charts support straightforward, easy-to-understand explanations of data-security principles. While Fisher uses a mainframe environment as the matrix for his discussion, his techniques can be profitably used by anyone who has information to secure.

Fisher sets out to show managers that data security is a basic business concern, and one that belongs to management as a whole rather than just to managers of data

(continued)

QUALITY PARTS AT DISCOUNT PRICES!

SUB-MINIATURE D TYPE CONNECTOR
SOLDER TYPE SUB-MINIATURE CONNECTORS USED FOR COMPUTER HOOK UPS.
DB-15 PLUG $2.75
DB-15 SOCKET $4.00
DB-15 HOOD $1.50
DB-25 PLUG $2.75
DB-25 SOCKET $3.50
DB-25 HOOD $1.25

"PARALLEL" PRINTER CONNECTOR
SOLDER STYLE 36 PIN MALE USED ON "PARALLEL" DATA CABLES.
$5.50 EACH

KEY ASSEMBLY
5 KEY $1.00 EACH
CONTAINS 5 SINGLE-POLE NORMALLY OPEN SWITCHES. MEASURES 3¾" LONG.
6 KEY $1.25 EACH
CONTAINS 6 SINGLE-POLE NORMALLY OPEN SWITCHES. MEASURES 4¼" LONG.

CRYSTAL
CASE STYLE HC33/U
2 MHZ $3.50 EA
COLORBURST 3579.545 KC $1.00 EACH

SOLID STATE RELAYS
2 AMP
RATED: CONTROL—2, 8–18VDC LOAD—120VAC 2 AMPS T.T.L. COMPATIBLE. SIZE: 1 1/16 × ⅜ × 1" HIGH
$3.50 EACH 10 FOR $32.00

13 VDC RELAY
CONTACT: S.P.N.C. 10 AMP @ 120 VAC ENERGIZE COIL TO OPEN CONTACT. COIL: 13 VDC 650 OHMS
SPECIAL $1.00 EACH

FREE! FREE! FREE! SEND FOR NEW 1985 48 PAGE CATALOG

MINIATURE TOGGLE SWITCHES
ALL ARE RATED 5 AMPS @ 125 VAC
S.P.D.T. (on-on) P.C. STYLE, NON-THREADED BUSHING. 75¢ EACH 10 FOR $7.00
S.P.D.T. (on-on) SOLDER LUG TERMINALS. $1.00 EACH 10 FOR $9.00 100 FOR $80.00
S.P.D.T. (on-off-on) NON-THREADED BUSHING. P.C. STYLE 75¢ EACH 10 FOR $7.00
S.P.D.T. (on-on) P.C. LUGS, THREADED BUSHING. $1.00 EACH 10 FOR $9.00 100 FOR $80.00

SOLID STATE BUZZER
STAR #SMB-06L 6 VDC. TTL COMPATIBLE.
$1.00 EACH 10 FOR $9.00

120V INDICATOR
NEON INDICATOR. RATED 120 V 1/3 W. MOUNTS IN 5/16" HOLE
75¢ EACH RED LENS. 10 FOR $7.00 100 FOR $65.00

EDGE CONNECTORS
22/44 22/44 GOLD PLATED CONTACTS .156 CONTACT SPACING.
$2.00 EACH 10 FOR $18.00

5 STATION INTERLOCKING
MADE BY ALPS. 3 - 2PDT AND 2 - 6PDT SWITCHES ON FULLY INTERLOCKING ASSEMBLY. 3¼" BETWEEN MOUNTING CENTERS.
$2.50 EACH

5 STATION NON-INTERLOCKING
SAME AS ABOVE, EXCEPT EACH SWITCH OPERATES INDEPENDENTLY.
$2.50 EACH

ALL ELECTRONICS CORP.
905 S. VERMONT • P.O. BOX 20406 • LOS ANGELES, CA 90006
TOLL FREE ORDERS • 1-800-826-5432
(IN CALIFORNIA: 1-800-258-6666)
AK, HI, OR INFORMATION • (213) 380-8000
• QUANTITIES LIMITED • MINIMUM ORDER $10.00 • USA: $2.50 SHIPPING NO C.O.D.
• FOREIGN ORDERS: INCLUDE SUFFICIENT SHIPPING • CALIF. RES. ADD 6 1/2%

When You Want The Best, Call...

nbs inc.

National Business Software and Supplies

$ + SENSE $110	SARGON III $35	TRIVIA CALL

MULTIMATE	$285	FLIGHT SIMULATOR	$ 35
PFS FILE	89	MULTIPLAN	125
PFS REPORT	79	DESK ORGANIZER	CALL
PFS WRITE	89	BANKSTREET WRITER	CALL
SYMPHONY	CALL	CROSSTALK	CALL
LOTUS 1•2•3	CALL	PRO KEY	59
TURBO GIFT PACK	72	PRO KEY 3.0	82
WORDSTAR	229	NORTON UTILITIES	55
SIDEKICK	35	R BASE 4000	268

TEAC MODEL #55-B DRIVES FOR IBM PC $139

Ribbons and Printwheels
EPSON-OKIDATA-NEC-DIABLO, ETC.
call for prices

(602) 967-5681 VISA MasterCard
P.O. Box 3163
Tempe, AZ 85281

Mon-Fri 8AM-5PM

No cash refunds—all sales final. 20% restocking fee. Add $5 for credit card purchases. AZ residents add 6%. Prices subject to change, product subject to availability. Allow two weeks for personal/company checks to clear. All items are new with manufacturers warranty. Software not warranted for suitability of purpose. Shipping and handling add $5 per order. Minimum order $50.

100% FLAWLESS COPIES . . .

. . . FAST!

No need to tie up your valuable computer to duplicate diskettes . . . when VICTORY can provide you with a duplicator that will do the job flawlessly, and much faster. One button operation automatically formats, duplicates and verifies up to 8 diskette copies at the same time.

VICTORY can supply you with literally dozens of standardized formats to match the protocol of virtually any current computer. In addition, built-in utilities enable you to read or devise any format you may require. If that's not enough, VICTORY can help you with unusual or unique formatting, serializing or copy-protecting problems.



VICTORY duplicators are designed to be reliable. Each of the copy drives has a separate controller to increase copying throughput and ensure maximum uptime. VICTORY Duplicators use industry proven drives combined with 100% digital technology . . . there are no analog circuits to slowly drift out of tolerance.

Let us help free you from your disk-duplicating bottleneck at a surprisingly attractive price. Write or call: VICTORY ENTERPRISES TECHNOLOGY, INC., 8910 Research Blvd., Suite B2, Austin, Texas 78758—(512) 450-0801.



Victory Enterprises Technology, Inc.

processing. The author broadens the field of concern. In addition to data theft or modification by intruders, managers should also consider data corruption by error a breach of information security. Fisher also emphasizes a need for tested plans to recover vital data that could be lost in disasters such as fire and flood.

Computer security is only one of the information-security issues the author addresses. A businessperson whose vital data is mostly on paper can utilize the systems proposed in this book as readily as someone working in a large data-processing center.

Fisher defines data security as "the protection of data from unauthorized *disclosure*, *modification* and/or *destruction* whether accidental or intentional." He develops this definition into a classification system for types of exposures. This classification is the first of many practical tools suggested by the author for analyzing potential data-security problems.

The Procedure

The first step in developing an effective information-security system is to draw a flowchart of the data life cycle. In a payroll application, for example, data is generated from workers' time cards, which are physically moved, checked, and entered into the data system. The data completes the cycle when the workers receive their paychecks. Every data-transfer point from time card to paycheck is a potential source of disclosure of privileged information, error, or fraud.

With a complete flowchart, a manager can divide information security into manageable chunks called control points, which can then be handled as separate entities. Fisher's systems are not precise because they do not attempt to map real-world interactions between the modules. However, the complexity of such interactions can easily obscure system analysis. What Fisher's procedures lose in precision they make up for in manageability. The author points out this and other limits in his procedures, which are meant to guide decisions rather than dictate action.

Building information security begins with an analysis of the risks at each control point in the data life cycle, the author says. Considering each type of security exposure (accidental or intentional data disclosure, change, or loss), the analyst identifies the specific exposures for each data-transfer area. He completes a worksheet for each control point and summarizes the risks on another form that maps the data-security system and highlights the greatest risks to information security. Fisher has designed formats for these worksheets.

In a brief chapter, "Limiting Risk," the author reviews a few commonsense, inexpensive ways to improve data security. Fisher shows that careful data-handling procedures in the hands of cooperative employees can eliminate as many potential risks as can elaborate, expensive security designs. Fisher places this chapter between

(continued)

Inquiry 363

You don't need a computer to talk to another computer.



DISPLAY (VP3012D). High performance, 12″ diagonal, non-glare, green phosphorous screen.

RESIDENT MENUS. User-friendly terminal set-up and phone directory maintenance.

DIRECT CONNECT MODEM. Built-in, 1200 or 300 baud, originate/answer/auto answer.

AUTO DIAL. Tone or pulse dialing of up to 26 stored phone numbers, voice or data base calls.

AUTO LOG-ON. Enters information automatically after auto dialing.

VIDEO OUTPUT. Selectable 80 or 40 characters × 24 lines on standard monitor.

TV OUTPUT. Displays 40 characters × 24 lines on Ch. 3/Ch. 4 of standard TV set.

MEMORY BACKUP. Minimum 48-hour storage of directory, log-on and other parameters without plug-in power. No batteries required.

FUNCTION KEYS. User programmable or downloadable from host computer.

APT VP5801, 1200 baud modem
APT VP4801, 300 baud modem

The RCA APT (All-Purpose Terminal). Now with built-in 1200 baud modem for greatly expanded data communications capabilities.

For business, professional and personal data communications, you'll find more user-friendly features and greater communications capabilities in the RCA APT than in other terminals selling for up to three times the price.

The new APT terminals are ideally suited to multi-data base time sharing by telephone line, and dedicated, direct computer-connected applications. They feature menu-controlled operation and a programmable "personality" to match specific communications requirements for your data bases.

A single keypress can dial a stored number, send the log-on sequence to the host computer, and return terminal control to the user. Password protection prevents unauthorized access to designated numbers. APT can also be used as an autodialer for voice communications.

The APT VP5801 terminal with 1200 baud modem lists for $798. The APT VP4801 terminal with 300 baud modem lists for $498. The data display monitor alone (VP3012D) is $199 list.

Quite simply, matching features with price, there are no other professional quality terminals available today that can do as much at such low cost.

For more information—or to order—call 800-722-0094. In Penna., call 717-295-6922. Or write for fully descriptive brochure to RCA Data Communications Products, New Holland Avenue, Lancaster, PA 17604. OEM and dealer pricing available.

The RCA APT. Expansive. Not expensive.

OTHER FEATURES

RS232C port for direct computer connections at data rates to 9600 baud, or for connecting high speed modems and other accessories. Parallel printer port for hard copy. Numeric keypad can dial phone numbers not in terminal directory. Built-in speaker with adjustable volume control for audio monitoring of phone line. Automatic screen blanking to reduce possibility of burn. Briefcase size: 17″ × 7″ × 2″. Weight: under 4 lbs.

RCA
Data Communications Products

Inquiry 299

Micros. Mice.

When you can't stop by your local Micro Mart Store, call us direct.
ORDERS ONLY

1-800-241-8149

At Micro Mart, we've got our finger on the pulse of the microcomputer industry. And, from our retail stores to our telemarketing divisions, we're in touch with the very latest developments, the newest products and the cutting edge of expert advice.

When you need the right product at the right price, remember the sales, service and support our local store experts and national distribution center can give you.

So if you can't drop by your local Micro Mart Store, let us point you in the right direction. Ask for your best price and expert advice.

AT&T *Personal Computer.* Innovative hardware for a wide range of business applications.

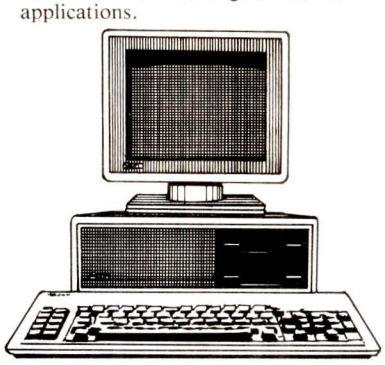

128K expandable to 640K, 2-360K, DS/DD Disk Drives, Monochrome Display, IBM Compatible_____Special introductory price.

LEADING EDGE Color PC, 256K, 2-360K DS/DD Disk Drives, Amdek Color 600.____**$1995**
MINDSET Personal Computer, 256K, 2-360K DS/DD Disk Drives, **W/Mindset Mouse.**___**$1795**

Networking/Protocol Conversion

SNA & BISYNC 3780, 5251, 3274, 3278._____
PC TURBO 186 by *ORCHID,* 80186 coprocessor board._____**$829**
IRMA/IRMALINE Replaces 3278's w/PC's._____**$899/$1099**
IRMAGRAPH Upgrades *IRMA* to 3278 graphics capability._____
IRMAPRINT Enhances *IRMA* graphics._____
PCnet By ORCHID, complete line.__**Start @ $299**
BLUE LYNX *5251 Mod 12 & 3276* Emulators by TECHLAND._____
SANTACLARA PC Terminal._____

Printers & Plotters

Thousands in stock.
HOUSTON INSTRUMENTS Plotters and Digitizers.

Dot Matrix
EPSON *FX80/100.*_____
EPSON *RX80/100.*_____
EPSON *LQ1500.*_____
EPSON *JX80, color printer.*__
OKIDATA *92 & 93, ML84,* (200 cps.), w/opt. IBM PROMS, Pacemark 2410, (350 cps)._____
TOSHIBA *P-1351 & 1340.*_____**$1295/$799**
DATAPRODUCTS *PRISM 8050 Color,* 132 col., 200 cps._____**$1295**
STAR MICRONICS Complete line._____
TEXAS INSTRUMENTS *855.*_____**$729**
NEC *Pinwriters, P2 & P3,* 180 cps._____
DIABLO *C-Series C-150.* Color ink jet, IBM color compatible._**$985**

Letter Quality
NEC *Spinwriters 2050, 3550, 8850.*____
DIABLO *630/630ECS.*___**$1395/$1795**
C-ITOH *Starwriter,* (40 cps), *Printmaster,* (55 cps)._____**$950/$1299**
We carry a full range of form handling options.

Floppy Disk Drives

TANDON *TM 100-2,* DD/DS, 360K._____**$185**
1/2 HEIGHT DISK DRIVES From SHUGART, TEAC. PC, XT & AT compatible._____**$119**

Hard Discs

Micro Mart carries all the major brands. If you don't see it—ask for it.
PEACHTREE PERIPHERALS *P-10, 20 & 50,* auto boot, int. & ext._____**Start @ $845**
SYSGEN *10 & 20* Meg w/streamer tape._**$2395/$2795**
SYSGEN *Image & Quickfile,* streamer tape back-up for your IBM XT & AT._____
BERNOULLI TECHNOLOGY Hard Disc Subsystems._____**$2895**
MAYNARD Complete line of hard disc subsystems._____
EMERALD Hard disc drives w/back-up._____

Chips

INTEL 8087 High speed coproc._____**$169**
64K RAMCHIPS._____**$35/64K**
256K RAMCHIPS._____

Multifunction Boards

We have a complete line of multifunction bds. compatible with the Portable, AT, XT, & Jr.
SIX PAK 64-384K, multifunc._____
MEGAPLUS 64-512K, max. 8 func._____
I/O PLUS Ser., Clk., Splr., Ramdisk, opt. 2nd Ser., Par. & Game._____
QUADRAM *QUADBOARD,* 64-384K, multifunc._____**$259**
TECMAR *CAPTAIN,* 64-384K, multifunc._**$249**
TALLTREE *J-RAM II,* 0-512K, w/software.____
TALLTREE *J-RAM IIX,* 0-512K, w/software._____**$129**
MICROLOG *BABY BLUE II,* 64-256K, Z80 coproc., + software._____
ORCHID *PC Blossom,* 64-384K, w/opt. *PCnet* Piggy-Back._____**$259**

MAYNARD Complete line._____

Graphic Cards

STB *Graphics Plus II,* color & mono, w/par. port & software._____**$369**
HERCULES Mono & color graphics cards support Lotus._____
PLANTRONICS *ColorPlus +* , HiRes color bd., par. port w/software._____
TECMAR *Graphics Master,* HiRes color & mono supports Lotus._____**$459**
QUADRAM *QUADCOLOR I & II,* color cards._
PARADISE SYSTEM *Multi-display* or *Modular Graphics Cards,* color & mono, par. port._____**Starting @ $299**

Software

Accounting
SORCIM/IUS Complete line including windows._
BPI ACCOUNTING Complete line._____
Spreadsheets & Integrated Packages
ASHTON-TATE *Framework.*_____**$345**
LOTUS *Symphony and Lotus.*_____
MICROSOFT *MultiPlan,* w/templates.__
MDBS *Knowledge Man.*_____
SORCIM *SuperCalc 3, Vers. 2.0*_____
SPI *Open Access.*_____
Enhancements & Utilities
SOFTCRAFT Fancy Font._____
FOX & GELLER Complete line of enhancements for *dBase II, III & Rbase 4000.*
NORTON Utilities.____**$65**
ROSESOFT *ProKey 3.0.*_____**$89**



Atlanta, New Orleans, Nashville, Miami, Tampa, Orlando

Advice. Price.

CENTRAL POINT SOFTWARE
Copy II PC. $35
ATI *Training.* $55
SOFTSTYLE *Set FX + and Printworks.* Printer control packages.
SIDEWAYS Inverts printout. $45
BORLAND *Sidekick.* $39
LIVING VIDEO TEXT Think Tank.

Compilers & Language Tools
LATTICE *C*-Compilers. $299
MICROSOFT Complete line.
WORDTECH The dBase compiler.
DIGITAL RESEARCH Complete line.
BORLAND *Turbo Pascal, Turbo Toolbox* and more. $39/each

Graphics & CAD
Zsoft *PC Paint Brush,* mouse driven graphics. $95
DECISION RESOURCES *ChartMaster/Sign-Master* pkgs.
AUTODESK *AutoCAD.* Complete line. Start @ $745
ENERTRONICS *Energraphics,* graphics & CAD package.
MICROPRO *ChartStar.*

Microsoft Mouse. Bus or serial mechanical mouse, comes with Mouse Menu software. Works with *WORD* and other popular software $159



PC Mouse, *from Mouse Systems.* Serial optical 3-button mouse with Pop-Up™ Menus and *PC Paint* software. Preconfigured for all the most popular software. $159

MICROSOFT Chart.
DIGITAL RESEARCH Presentation Master.

Communications
MICROSTUF *CROSSTALK XVI.* $99
HAYES *SMARTCOM II.*

Word Processors
MULTIMATE w/Spelling checker & tutorial. $259
SAMNA *III,* wd. processor.
MICROSOFT *Word,* w/or w/out mouse.
LIFETREE *Volkswriter Deluxe.*
MICROPRO *WordStar Pro Pack & Series2000.* $245
SSI *WordPerfect.*
WORDMARC *Wordmarc.*

Office & Project Planning
Call for our Tax and Tax Planning packages.
HARVARD *Harvard Project Manager.* $249
IUS *Easy SalesPro.*
MICROSOFT *Project.*

Data Base Managers
MICRORIM *4000* or *6000,* Report Writer & Clout options.
GMS SYSTEMS *Power-base.*
WARNER SOFTWARE The desk organizer.
ASHTON-TATE *dBase II & III.*
MICROSTUF *Infoscope.*

Modems

HAYES *Smartmodem 300, 1200, & 1200B.* $199/$469/$329
RIXON 1200-4800 BAUD sync. & async. models.
ANCHOR AUTOMATION *Signalman Mark XII.* $259
VEN-TEL 1200 BAUD Half Card for the IBM Portable & XT.
POPCOM *Popcom,* int. and ext. w/voice & data comm.

Miscellaneous Hardware & Accessories

DYSAN Diskettes, PC, XT & AT compatible.
MICRO MART Diskettes DS/DD, 7 yr. war. $19/10
KEYTRONICS *5150 & 5151.* Keyboards.
LQ SHEET FEEDERS Sheet feeders.
CURTIS Accessories.
HAYES *Mach II & Mach III* joysticks.
PENCEPT *Penpad,* software avail. $775
TOUCHSTONE TECHNOLOGY *Touchstone I.* Ten key pad w/ cursor control.
QUADRAM *MICROFAZER,* print buffer, 8-128K.
TRIPPELITE Back up power supply 200-1000 watts, and *ISOBAR* surge protectors, 4 & 8 plug.

Monitors & CRT's

PGS *MAX 12,* amber, 720h x 350v.
PGS *SR-12,* 690h x 480v, w/dual scan cd.
PGS *HX-12,* 690 Dot RGB.
QUADRAM *QUADCHROME,* 690 Dot RGB. $439
AMDEK *COLOR 300, 500, 600, 700, 710, 725,* new complete line of HiRes RGB's w/new low prices.
AMDEK *300A/300G, composite monitors.* $139/$129
AMDEK *310A,* amber w/3 yr. war.
WYSE Terminals, 100, 75, 50, entire line in stock.



Micro Mart has financing options available. Ask for a Micro Mart Blue Chip Credit Card application today.

Service & Repairs

***On-Site**—We have hundreds of service locations nationally.
***Depot**—Our National Service Center is one of the fastest in the US.
***We have**—A wide variety of services available. Just call us.

©Copyright Micro Mart 1984.
Technology Corporate Campus
3159 Campus Drive
Norcross, Georgia 30071

For information or the store location nearest you, call

(404) 449-8089



America's PC Specialist.

MICRO MART™

IBM is a registered trademark of International Business Machines Corporation. AT&T, Leading Edge, Mindset, Microsoft, Mouse Systems and their products, respectively, are trademarks of AT&T Information Systems, Leading Edge Products Inc., Mindset Corporation, Microsoft Corporation and Mouse Systems Corporation. All Prices are subject to change without notice.

Ft. Lauderdale, Louisville, Tyson's Corner, Rockville, Pittsburgh.

Inquiry 230

HARMONY VIDEO & COMPUTERS
2357 CONEY ISLAND AVE., BROOKLYN, NY 11223
TO ORDER CALL TOLL FREE
800-VIDEO84 OR 718-627-1000 OR 800-441-1144



IBM PC w/DRIVE $1299.95
APPLE 2C $869.95
OKIDATA 92 $356.95
GEMINI 10X $229.95

"PRINTER SPECIALS"

Okidata 92	356	Radix 15	575	Panasonic KXP 1091	259
Okidata 93	559	Radix 10	489	Panasonic KXP 1090	204
Epson RX80 FT	291	Powertype	296	Silver Reed EXP 550	389
Epson RX80	237	Daisywriter	789	Silver Reed EXP 500	292
Epson RX100	395	Brother HR15	345	Silver Reed EXP 770	759
Epson Fx80	399	Brother HR25	579	Nec 3550	1334
Epson FX100	598	Brother HR35	794	Nec 2050	659
Epson LQ1500	1118	Keyboard	129	Olympia RO	319
Toshiba 1351	1229	Riteman Blue +	279	Nec 7730	1674
Delta 10	338	Diablo 620 API	699	Nec 7715	1674
Delta 15	464	Mannesman Spirit 80	237	OKI 84	648
Gemini 10X	229	Mannesman 160L	539	Panasonic KXP 1093	578
Gemini 15X	339	Juki 6100	364	Panasonic KXP 1092	389

WOW!

IBM		MONITORS		ATARI	
PC w/Drive	1299	Amdek 300 Green	114	800 XL	114
PC XT	2499	Amdek 300 Amber	124	1027 Printer	169
Portable	1799	310 Amber	139	1050 Drive	159
PC Jr.	459	Color 300	229	Indus. Drive	279
Color Card	169	Color 500	324		
IBM Monitor (GRN)	244	Color 600	384		
Hercules Graphic Master	329	Color 700	489		
Tecmar Captain 64K	279	Color 710	529	APPLE	
AST Six Pack	239	Zenith Green	74	2E w/Disk Drive	859
Tallgrass 20 Meg	2399	Taxan 210	209	Macintosh	1689
Quad Board	224			Apple 2C	869
Paradise	254			Imagewriter	486
Hercules	164			Addt. Drives	from $99
Keytronics	159	SANYO			
		550 S.S.	648		
		550 D.S.	659		
COMMODORE		555 D.S.	949	MODEMS	
Commodore 64	189	CRT 30	99	Hayes 1200	444
1541 Disk Drive	204			Hayes 1200B	389
1702 Monitor	208	800-441-1144		Hayes 300	189
MPS801 Printer	179			Micromodem 2E	214
1526 Printer	215			Access 123	374
				Novation J-cat	95

Computers for Less

IBM P.C.
256K Ram, Color card, Monitor, Parallel Port, DOS
$1995
call for other configurations

IBM P.C.
256K Ram, 2-Floppy drives, 10 Meg. hard drive, Mono card, Monitor, DOS
$2795
call for complete details

Printers
Brother HR-15 ..... $365.00
Epson FX-80 ..... 399.00
Juki 6100 ..... 399.00
Software
dBase III 399.00
PFS: Write 84.00
Lotus 1-2-3 ..... 299.00

Modems
Hayes 1200 ..... $445.00
Hayes 1200B 369.00
Pro-Modem 310.00
Accessories
AST Six Pak Plus 249.00
Teac 55B 179.00
10 Meg. Internal drive 750.00

Call for pricing on our complete line of fine computing products

YOU CAN'T BUY COMPUTERS FOR LESS
(619) 579-2730 (800) 782-4242 (CA only)
3855 Avocado Blvd., Suite 140•227 La Mesa, California 92041
MasterCard
Prices subject to change without notice.
Prices reflect 2 1/2% cash discount • Quantities Limited
VISA

BOOK REVIEWS

sheets and evaluates the degree of control for that exposure on a 0–4 scale. A summary sheet uses these grades to map strong and weak points in the system and to average a grade for security control in the system as a whole.

Almost half of *Information Systems Security* is appendix. The author reprints questionnaires and guidelines on information-system security from IBM and other companies. The appendixes demonstrate that Fisher's ideas are not original. His contribution is that he gives managers practical methods for assessing risk, evaluating controls, and making decisions on new controls for data security. The appendixes are valuable in light of Fisher's methodical approach to dealing with security systems. Once a manager absorbs Fisher's methods, these appendixes become intermediate readings for further study.

Information Systems Security is not exciting or original, but it is competent and readable for managers who are not computer people. Fisher presents a "can-do" framework for a comprehensive introduction to the principles of developing information security. Managers will still have to determine specific control solutions for their information systems, but they can do so from solid points of departure and with methods they can translate into effective data-security decisions.

Annette Hinshaw (POB 580635, Tulsa, OK 74158) is a freelance technical writer.

MICROPROCESSORS:
HARDWARE, SOFTWARE, AND DESIGN APPLICATIONS
Reviewed by Alan Finger

Given the importance of microprocessor courses in today's engineering curriculum, it is natural that many textbooks have been written on the subject. *Microprocessors: Hardware, Software, and Design Applications* is one example. Its intent is to introduce junior and senior engineering students to the fundamentals of modern microprocessors and the microcomputer systems and software built around them. Wunnava Subbarao is an associate professor at Florida International University and has based this text on his courses there. He examines five well-known microprocessors and illustrates their applications with student projects. This practical approach is well suited to motivating students as well as giving them a hint as to what awaits them in the Real World.

Subbarao begins with an introduction to the general concepts of microprocessors. Other chapters are split into two sections on each device: Intel's 8085, Motorola's 6800, MOS Technology's 6502, Zilog's Z80, and RCA's 1802. The first section on each chip describes the processor and, except for the Z80, a commercial single-board "training" microcomputer using the device. In the second section, the author details several practical applications developed

(continued)

Inquiry 83

Available for IBM PC

What C did for Programming Mark Williams has done for C Programming

The C Programming System from Mark Williams

MWC86 gets your C programs running faster and uses less memory space than any other compiler on the market. Then *csd*, Mark Williams' revolutionary C Source Debugger, helps you debug faster. That's The C Programming System from Mark Williams Company.

MWC86

MWC86 is the most highly optimized C compiler available anywhere for the DOS and 8086 environment. The benchmarks prove it! They show MWC86 is unmatched in speed and code density.

MWC86 supports large and small models of compilation, the 8087 math coprocessor and DOS 2.0 pathnames. The compiler features common code elimination, peephole optimization and register variables. It includes the most complete libraries. Unlike its competition, MWC86 supports the full C language including recent extensions such as the Berkeley structure rules, voids, enumerated data types, UNIX* I/O calls and structure assignments.

Quality is why Intel, DEC and Wang chose to distribute MWC86. These industry leaders looked and compared and found Mark Williams to be best.

User Friendly

MWC86 is the easiest to use of all compilers. One command runs all phases from pre-processor to assembler and linker. MWC86 eliminates the need to search for error messages in the back of a manual. All error messages appear on the screen in English.

A recent review of MWC86 in *PC World*, June, 1984, summed it up:

"Of all the compilers reviewed, MWC86 would be my first choice for product development. It compiles quickly, produces superior error messages, and generates quick, compact object code. The library is small and fast and closely follows the industry standard for C libraries."

csd C Source Debugger

Mark Williams was not content to write the best C compiler on the market. To advance the state of the art in software development, Mark Williams wrote *csd*.

csd C Source Debugger serves as a microscope on the program. Any C expression can be entered and evaluated. With *csd* a programmer can set tracepoints on variables and expressions with full history capability and can single step a program to find bugs. The debugger does not affect either code size or execution time. *csd* features online help instructions; the ability to walk through the stack; the debugging of graphics programs without disturbing the program under test; and evaluation, source, program and history windows.

csd eases the most difficult part of development — debugging. Because *csd* debugs in C, not assembler, a programmer no longer has to rely on old-fashioned assembler tools, but can work as if using a C interpreter — in real time.

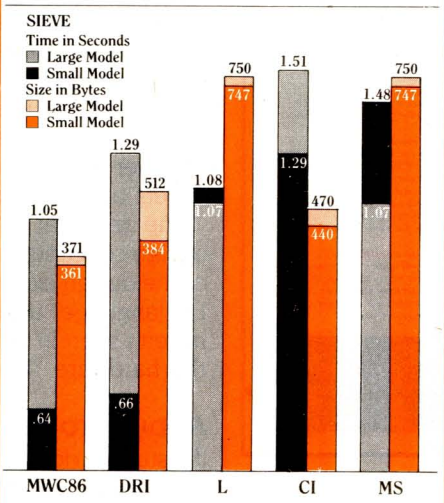

The C Programming System from Mark Williams now supports the following libraries:

Library	Company
Windows for C	Creative Solutions
Halo	Media Cybernetics
PHACT	PHACT Associates
The Greenleaf Functions	Greenleaf Software
Btrieve	SoftCraft

The C Programming System from Mark Williams

The C Programming System from Mark Williams delivers not only the best C compiler for the 8086 but also the only C source level debugger. That's why it does for C programming what C did for programming. The Mark Williams C Programming System gives the programmer the MWC86 C compiler and the *csd* C Source Debugger for only $495. Order today by calling 1-800-MWC-1700. Major credit cards accepted.

Technical support for The Mark Williams C Programming System is provided free of charge by the team that developed it.

Mark Williams Company
1430 W. Wrightwood Ave.
Chicago, IL 60614

*Unix is a Trademark of Bell Laboratories.

BEFORE YOU BUY CABLE ASSEMBLIES,

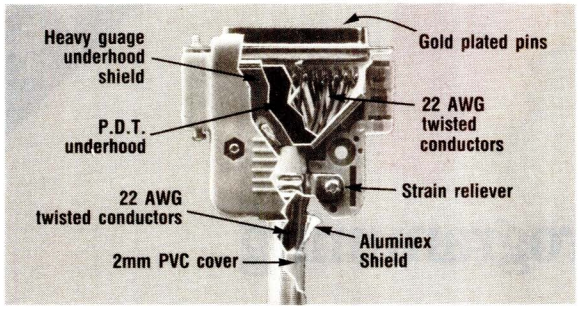

CHECK UNDER THE HOOD!

DATA SPEC™ cable assemblies are the very best. Each cable is fully shielded to exceed FCC EMI/RFI emission requirements. The unique P.D.T. technique, introduced by DATA SPEC™ and employed beneath the hood shield, insures maximum integrity under the most adverse conditions. DATA SPEC™ has interface cables for all your requirements: Printers, Modems, Monitors, Disk Drives, and much more. And all DATA SPEC™ cable assemblies carry a lifetime warranty. Insist on DATA SPEC™ cables in the bright orange package. Available at better computer dealers everywhere. For more information, call or write:

DATA SPEC™

A Division of Alliance Research Corporation

20120 Plummer Street • Chatsworth, CA 91311 • (818) 993-1202

Copyright © 1984 by Alliance Research Corporation Patent PND.

Powerful Single Board Computer Includes CP/M Plus™ on Disk



$599
Assembled, Tested
Includes CP/M 3.0 on disk

New Items:
- MSDOS Coprocessor
- 68000 Coprocessor
- 80X24 LCD Driver
- Hard/RAM Disk
- 3½" Single Board

Mountain Side Computer

MSC-ICO

Video, 128Kb, CP/M Plus™, and more

Z80 CPU
MSC-ICO uses the most popular microprocessor, the Z80, as its main CPU. MSC-ICO runs at 4 MHZ without any wait states. The whole system is incorporated into a high quality four layer PC board measuring only 145mm X 250mm (10" x 6"). The system requires only 1.2 Amps at + 5 Volts and 0.1 Amps at ±12 Volts.

Banked CP/M Plus Included
CP/M Plus (3.0 banked) is included on disk with all manuals. CP/M Plus is upwardly compatible with CP/M 2.2 and includes the SID debugger, the MAC and RMAC macro assemblers, and the LINK-80 loader. MSC-ICO's custom BIOS provides support for multiple disk formats and I/O device control. System specific software for disk formatting, disk copying, defining function keys and modifying screen attributes is also included.

128Kb RAM
One 64K bank of memory is devoted to CP/M and its disk cache blocks, while the other 64K bank is devoted to applications programs. This arrangement not only provides more memory for programs, but it significantly increases the speed of disk I/O.

Internal Floppy Disk Controller
MSC-ICO handles Shugart/ANSI standard floppy disk drives in a variety of sizes and formats.
- **8" SSSD, 243Kb**
- **8" DSDD, 1.2Mb**
- **5-1/4" DSDD, 320Kb**
- **5-1/4" DSQD, 800Kb**
- **5-1/4" QHD, 1.2Mb**

Up to four drives of any density or size can be connected to MSC-ICO. Both 5 1/4 and 8 inch connectors are on-board to make disk drive connections easy.

High Speed CRT Controller
MSC-ICO contains an 80 x 24 line memory mapped CRT controller. Video output is composite or separate to match any monitor. Attributes such as insert and delete line, reverse video, and semigraphics are supported. Cursor escape sequences are an extension of DEC's VT52 and can be easily reprogrammed to emulate most standard terminals.

CP/M Plus™ of Digital Research Inc.

Two RS232C Ports
MSC-ICO communicates with printers, modems, plotters, and other standard RS232C devices through its two serial ports. These ports are independently programmable for baud rates, stop bits, data format and parity. Synchronous communication on Port A is jumper selectable.

Centronics Parallel Port
A standard Centronics parallel port allows MSC-ICO to communicate with printers and other parallel devices.

Parallel Keyboard Port
MSC-ICO connects to any ASCII parallel keyboard of positive or negative polarity with a negative strobe. A type-ahead buffer and programmable function keys are provided by MSC-ICO's custom BIOS.

16 Bit TTL I/O Port
This port allows you to access printers, relays, LED's, DAC's, ADC's, switches, EPROM programmers and many other devices.

Clock Calendar
The battery backed up clock calendar provides time and date information to CP/M for file stamping. The clock can also be accessed from applications programs.

External Bus
MSC-ICO's 50 pin bus connector provides expansion for a hard disk controller, RAM disk, graphics or a 68000 system. Please call or write for more information on these options.

MSC-ICO Saves Time and Money
With MSC-ICO's low cost and quality worksmanship, why spend time, energy and money to design, debug and test your own system. Whether you require single units or large volume quantities we can meet your needs. Order your evaluation unit today!

Manufactured by:
Southern Pacific Limited
1-3-1B Tsurumichuo Tsurumi, Yokohama, JAPAN 230
☎ 045-501-8842, Telex 3822320 SPACIF J

USA Distributor
ARTISOFT, Inc.
P.O. Box 41436, Tucson, Arizona 85719 ☎ (602)327-4305

Inquiry 31 for Dealers. Inquiry 32 for End-Users.

by students. Although I might quibble with the timeliness of the author's choices of processors and examples, which seem to be governed by what was on hand, they are certainly adequate for an introduction.

Two Points of View

To review this book, I approached it from two perspectives. First, I put myself in the position of an engineering student with a limited knowledge of the subject matter. I would have had courses in digital design and probably an introduction to programming by way of one or two high-level languages. A good textbook should lead me, step by step, through the concepts involved in the design of microcomputer systems and software with appropriate problems to verify my understanding of the material.

I also examined the book as an expert, checking the quality and accuracy of the text and illustrations. Unfortunately, from both viewpoints, *Microprocessors* fails.

An Introduction?

For students, the trouble starts right in chapter 1. The author plunges into a discussion of the internal contents of a "typical" microprocessor and then goes on to a description of address, data, and control buses, and instruction formats. Only after all this are we treated to one diagram and a half page of text as an overview of microcomputer-system organization.

The remainder of the book continues similarly. The chapters discussing the 8085 and its cousin, the Z80, are illogically separated by the very different 6800 and 6502, which are somewhat related to each other. Subbarao makes only a vague attempt to relate any processor to the others. Instruction sets are presented as poor reproductions of the manufacturer's summary sheets—usually pasted to the wall by an experienced programmer as a memory jogger.

The book creates an overall impression of topics strewn haphazardly. What organization there is is counterproductive because it lacks purpose. General system concepts such as system clocks, bus cycles, design rules, and assembly-language programming procedures are ignored in favor of more specialized information on such topics as commercial interconnection schemes (S-100 bus and Multibus) and rarely used components. It seems to this reviewer that the author paraphrased manufacturers' data sheets and student reports.

The material is oriented toward hardware; software design concepts are not discussed. The software portions of the design examples are presented in a "pseudoassembly language" used to hand-assemble code, something I haven't seen in 10 years. The explanations relate only to the hardware "bit-twiddling" aspects of the programs.

Adding to the Confusion

If a student does absorb information from this book, much of it will be wrong. Although it hardly seems necessary,

(continued)

POWERFUL CP/M® SOFTWARE

Diskette & Manual $29.95

NEVADA FORTRAN™
DISKETTE & MANUAL
$29.95

Nevada FORTRAN is based upon the ANSI-66 standards (FORTRAN IV) with some 1977 level features. Advanced features include: IF . . . THEN . . . ELSE statement; COPY (Include); CHAINing with COMMON; and TRACE debugging. Package includes a diskette, 214-page manual and 5 sample programs. Included also is an 8080 assembler. Requires 48K RAM.

NEVADA COBOL™
DISKETTE & MANUAL
$29.95

Nevada COBOL, based upon the ANSI-74 standards, has all the popular features. Powerful level 2 features include: compound conditionals and full CALL CANCEL. This software package includes a diskette, 165-page manual, plenty of examples and 16 complete COBOL source code programs.

NEVADA BASIC™
DISKETTE & MANUAL
$29.95

With the built-in, full-screen text editor, you can easily develop programs for 1/10 the cost of a comparable BASIC interpreter. What's more, Nevada BASIC has full Matrix operations, Single- and Multi-Line functions, and BCD math (no round-off errors). You get a diskette and a 220-page manual. Requires 48K RAM.

NEVADA PASCAL
DISKETTE & MANUAL
$29.95

Advanced features include: 14-Digit precision; BCD math (no round-off errors); Floating point +63 -64; TRACE debugging; Arrays up to 8 dimensions; 64K strings; External procedures; and Dynamic Module loading. You get a diskette and a 184-page manual. Requires 60K RAM and one disk drive with at least 90K storage.

NEVADA PILOT™
DISKETTE & MANUAL
$29.95

Nevada PILOT, written by Prof. John Starkweather, the language's creator, meets and exceeds all PILOT-73 standards. See the review in January 1983 MICROCOMPUTING. This package includes a diskette, 131-page manual, and 10 useful sample programs.

NEVADA EDIT™
DISKETTE & MANUAL
$29.95

Nevada EDIT, a full-screen, video-display text editor, is designed specifically for computer program text preparation. Nevada EDIT is completely user-changeable, can be configured to almost any terminal and takes up only 12K of disk space. This package includes a diskette and 59-page manual.

WHY WAIT? ORDER YOURS TODAY!

Satisfaction guaranteed—or your money back. If for any reason you're not completely satisfied, just return the package—in good condition—with the sealed diskette unopened, within 15 days and we'll refund your money.

Checks must be in U.S. Dollars and drawn on a U.S. Bank.

California deliveries add 6% or 6.5% sales tax.

SHIPPING AND HANDLING FEES: Add $4.00 for the first package or manual and $2.00 each additional. **OVERSEAS:** Add $15.00 for the first package or manual and $5.00 each additional. **COD's:** Add $4.00.

ALSO AVAILABLE:

- ★ EXTRA MANUALS $14.95
- ★ COBOL Application Packages, Book 1 ..... $ 9.95
- ★ BIG PRINT-Diskette $19.95

The CP/M Operating System, an 8080, 8085, or Z-80 (8-Bit) microprocessor, and 32K RAM are required, unless otherwise stated above.

WHEN YOU ORDER, PLEASE SPECIFY ONE OF THE FOLLOWING DISKETTE FORMATS:

- ☐ 8" SSSD (Standard CP/M IBM 3740)

5¼" Diskettes for:

- ☐ Access/Actrix
- ☐ Apple CP/M
- ☐ DEC VT 180
- ☐ DEC Rainbow
- ☐ Epson QX-10
- ☐ Heath Hard Sector (Z-89)
- ☐ Heath Soft Sector (Z-90, Z-100)
- ☐ IBM-PC (Requires Z-80, Baby Blue II Card)
- ☐ Kaypro Double Density (NCR)
- ☐ Micropolis Mod II
- ☐ NEC PC 8001
- ☐ North Star Double Density
- ☐ North Star Single Density
- ☐ Osborne Single Density
- ☐ Sanyo 1000, 1050
- ☐ Superbrain DD DOS 3.X (512 byte sec)
- ☐ Televideo
- ☐ TRS-80 Model 1 (Base O Mapper)
- ☐ Xerox 820 Single Density

WE WELCOME C.O.D.'s

MasterCard VISA

(415) 753-0186

Since 1977

ELLIS COMPUTING™

ELLIS COMPUTING, INC.
3917 Noriega Street
San Francisco, CA 94122

CP/M is a registered trademark of Digital Research, Inc. Microsoft is a registered trademark of Microsoft Corp. TRS-80 is a registered trademark of Tandy Corp. Apple II is a trademark of Apple Computer, Inc. Osborne is a registered trademark of Osborne Computer Corp. Xerox 820 is a trademark of Xerox Corp. Kaypro is a trademark of Non-linear Sys. Heath/Zenith is a trademark of Heath Corp. IBM is a registered trademark of International Business Machines, Corp. Nevada BASIC, Nevada COBOL, Nevada FORTRAN, Nevada PILOT, Nevada EDIT, Nevada PASCAL, and Ellis Computing are trademarks of Ellis Computing, Inc. © 1984 Ellis Computing, Inc.

64K S100 STATIC RAM

$179.00 KIT

NEW!

LOW POWER!

150 NS ADD $10

BLANK PC BOARD WITH DOCUMENTATION $49.95

SUPPORT ICs + CAPS $17.50

FULL SOCKET SET $14.50

FULLY SUPPORTS THE NEW IEEE 696 S100 STANDARD (AS PROPOSED)

FOR 56K KIT $165

ASSEMBLED AND TESTED ADD $50



PRICE CUT!

FEATURES:

* Uses new 2K x 8 (TMM 2016 or HM 6116) RAMs.
* Fully supports IEEE 696 24 BIT Extended Addressing.
* 64K draws only approximately 500 MA.
* 200 NS RAMs are standard. (TOSHIBA makes TMM 2016s as fast as 100 NS. FOR YOUR HIGH SPEED APPLICATIONS.)
* SUPPORTS PHANTOM (BOTH LOWER 32K AND ENTIRE BOARD).
* 2716 EPROMs may be installed in any of top 48K.
* Any of the top 8K (E000 H AND ABOVE) may be disabled to provide windows to eliminate any possible conflicts with your system monitor, disk controller, etc.
* Perfect for small systems since BOTH RAM and EPROM may co-exist on the same board.
* BOARD may be partially populated as 56K.

256K S-100 SOLID STATE DISK SIMULATOR!

WE CALL THIS BOARD THE "LIGHT-SPEED-100" BECAUSE IT OFFERS AN ASTOUNDING INCREASE IN YOUR COMPUTER'S PERFORMANCE WHEN COMPARED TO A MECHANICAL FLOPPY DISK DRIVE.

PRICE CUT!



FEATURES:

* 256K on board, using + 5V 64K DRAMS.
* Uses new Intel 8203-1 LSI Memory Controller.
* Requires only 4 Dip Switch Selectable I/O Ports.
* Runs on 8080 or Z80 S100 machines.
* Up to 8 LS-100 boards can be run together for 2 Meg. of On Line Solid State Disk Storage.
* Provisions for Battery back-up.
* Software to mate the LS-100 to your CP/M* 2.2 DOS is supplied.
* The LS-100 provides an increase in speed of up to 7 to 10 times on Disk Intensive Software.
* Compare our price! You could pay up to 3 times as much for similar boards.

BLANK PCB (WITH CP/M* 2.2 PATCHES AND INSTALL PROGRAM ON DISKETTE) $69.95 (8203-1 INTEL $29.95)

$259.00 #LS-100 (FULL 256K KIT)

THE NEW ZRT-80

CRT TERMINAL BOARD!

A LOW COST Z-80 BASED SINGLE BOARD THAT ONLY NEEDS AN ASCII KEYBOARD, POWER SUPPLY, AND VIDEO MONITOR TO MAKE A COMPLETE CRT TERMINAL. USE AS A COMPUTER CONSOLE, OR WITH A MODEM FOR USE WITH ANY OF THE PHONE-LINE COMPUTER SERVICES.

FEATURES:

* Uses a Z80A and 6845 CRT Controller for powerful video capabilities.
* RS232 at 16 BAUD Rates from 75 to 19,200.
* 24 x 80 standard format (60 Hz).
* Optional formats from 24 x 80 (50 Hz) to 64 lines x 96 characters (60 Hz).
* Higher density formats require up to 3 additional 2K x 8 6116 RAMS.
* Uses N.S. INS 8250 BAUD Rate Gen. and USART combo IC.
* 3 Terminal Emulation Modes which are Dip Switch selectable. These include the LSI-ADM3A, the Heath H-19, and the Beehive.
* Composite or Split Video.
* Any polarity of video or sync.
* Inverse Video Capability.
* Small Size: 6.5 x 9 inches.
* Upper & lower case with descenders.
* 7 x 9 Character Matrix.
* Requires Par. ASCII keyboard.



BLANK PCB WITH 2716 CHAR. ROM, 2732 MON. ROM $49.95

SOURCE DISKETTE - ADD $10

SET OF 2 CRYSTALS - ADD $7.50

WITH 8 IN. SOURCE DISK! (CP/M COMPATIBLE)

$99.95 # ZRT-80 (COMPLETE KIT, 2K VIDEO RAM)

Digital Research Computers

P.O. BOX 461565 • GARLAND, TEXAS 75046 • (214) 225-2309

Call or write for a free catalog on Z-80 or 6809 Single Board Computers, SS-50 Boards, and other S-100 products.

TERMS: Add $3.00 postage. We pay balance. Orders under $15 add 75¢ handling. No C.O.D. We accept Visa and MasterCard. Texas Res. add 5-1/8% Tax. Foreign orders (except Canada) add 20% P & H. Orders over $50 add 85¢ for insurance.

ALL SALES SUBJECT TO THE TERMS OF OUR 90 DAY LIMITED WARRANTY. FREE COPY UPON REQUEST.

a number of pages on single-chip microcomputers are thrown in at the end of several chapters. In one such case, Intel's 8048 is incorrectly described as a modified version of the 8085. They do not even belong to the same family. Another error exists in the description of how the 8085 responds to its interrupt input INTR. According to the author's description, the 8085 responds to INTR by issuing an interrupt-acknowledge signal INTA to a requester, which, in turn, places the vector address on the data bus. In reality, the 8085 will accept the next complete instruction, usually a 1-byte restart (RST) or 3-byte CALL from the requester. Trying to bring up an interrupt-driven system with information like this would certainly prove interesting.

Much of the misinformation is more subtle. Subbarao uses microcomputer jargon, usually with little or no explanation. He uses much of it incorrectly. The term "bus," for example, has two meanings. It can be used in reference to a collection of related signals connecting different components within a microcomputer system. It can also refer to any of a number of industry-standard arrangements for interconnecting function boards in a larger system. The second type generally contains several of the first type along with other signals. In several instances, the author discusses them as if they were the same. The IEEE-488 (GPIB) bus somehow finds its way into one of these discussions, even though it is actually a data-communications standard generally used to connect a computer to instruments (and occasionally intelligent peripherals such as disk systems and plotters). I would presume its inclusion is due to the presence of the word "bus." The author uses another term, "I/O [input/output] bound," to refer to something "bound for input or output" as opposed to its normal usage as a reference to a program with its speed limited by I/O operations.

Good Problems

If the book has one saving grace, it is the abundance of examples and problems, many of which are accompanied by answers that provide better information than the body text. After reading the chapters on the 1802 processor, with which I am not very familiar, I was still in the dark about many aspects of its operation. I then worked through some of the problems with an RCA data book at hand and felt much more comfortable about the possibility of dealing with one of these rather arcane devices. Perhaps this is what this book is all about: providing problems to be solved using other sources of information.

Subbarao wisely suggests that readers consult the appropriate manufacturer's literature. This book will not provide the student with enough information to use a microprocessor or write software for it. Although the idea behind *Microprocessors* is a good one, the book is too flawed with organizational and conceptual errors for me to recommend it to anyone. ■

Alan Finger is a vice president at Comprehensive Computer Consultants (270 *Littleton Rd., Building* 14, *Westford*, MA 01886).



Genicom would like to get personal with you. On a professional level, of course.

Personal computers have become a valuable asset in business. The problem is that most personal computer systems are originally sold with "personal printers"...printers built for home use, not for heavier business work.

These "personal printers" are too slow for many business needs. They can tie-up your computer for extended periods of time...time you could be using to do other work.

Another problem is durability. In business, you need a printer that can produce high volume output over a long duty cycle. The common "personal printer" will often just quit under such continuous operation.

That's why Genicom has created the 3014, 3024, 3304 and 3404...professional printers built for personal computers.

Price/performance matched for small business systems, the Genicom 3000 PC printers are designed to increase productivity and maximize the value of your personal computer.

The 3000 PC printers provide 160-400 cps draft, 80-200 cps memo, and 32-100 cps NLQ printing...performance for both high productivity and high quality printing.

The 3014/3024 models print 132 columns. The 3304 and 3404 models give you a full 136 column width, and offer color printing as well.

Each printer is easy to use, lightweight, functionally styled and attractive. And you can choose options from pedestals and paper racks to document inserters, sheet feeders and 8K character buffer expansion, plus more.

Genicom 3000 PC printers feature switch selectable hardware, dual connectors and dual parallel or serial interfaces. Plus the 3014 and 3024 emulate popular protocols for both Epson MX with GRAFTRAX-PLUS™ and Okidata Microline 84 Step 2™, while the 3304 and 3404 emulate popular protocols for Epson MX with GRAFTRAX-PLUS™. So your current system is most likely already capable of working with these Genicom printers without modification.

Most important, the Genicom 3000 PC printers are quality-built, highly durable printers designed for rapid, continuous duty cycle printing. So take some personal advice. Get a Genicom professional printer for your personal computer today.

Genicom Corporation, One General Electric Drive, Dept. C421, Waynesboro, VA 22980. In Virginia, call 1-703-949-1170.

GENICOM™

The New Printer Company.

For the solution to your printing needs call

TOLL FREE 1-800-437-7468

In Virginia, call 1-703-949-1170.

Inquiry 147

Epson MX with GRAFTRAX-PLUS is a trademark of Epson America, Inc.
Okidata Microline 84 Step 2 is a trademark of Okidata Corporation

Great Ideas look even better on a Princeton monitor

Your Great Ideas deserve the best image you can give them. But, just as a music system's performance depends on the speakers, your computer system is limited by the quality of your monitor.

Monitor performance can be measured. That's something you should know about.

In other words, your Great Ideas should be seen, not blurred.

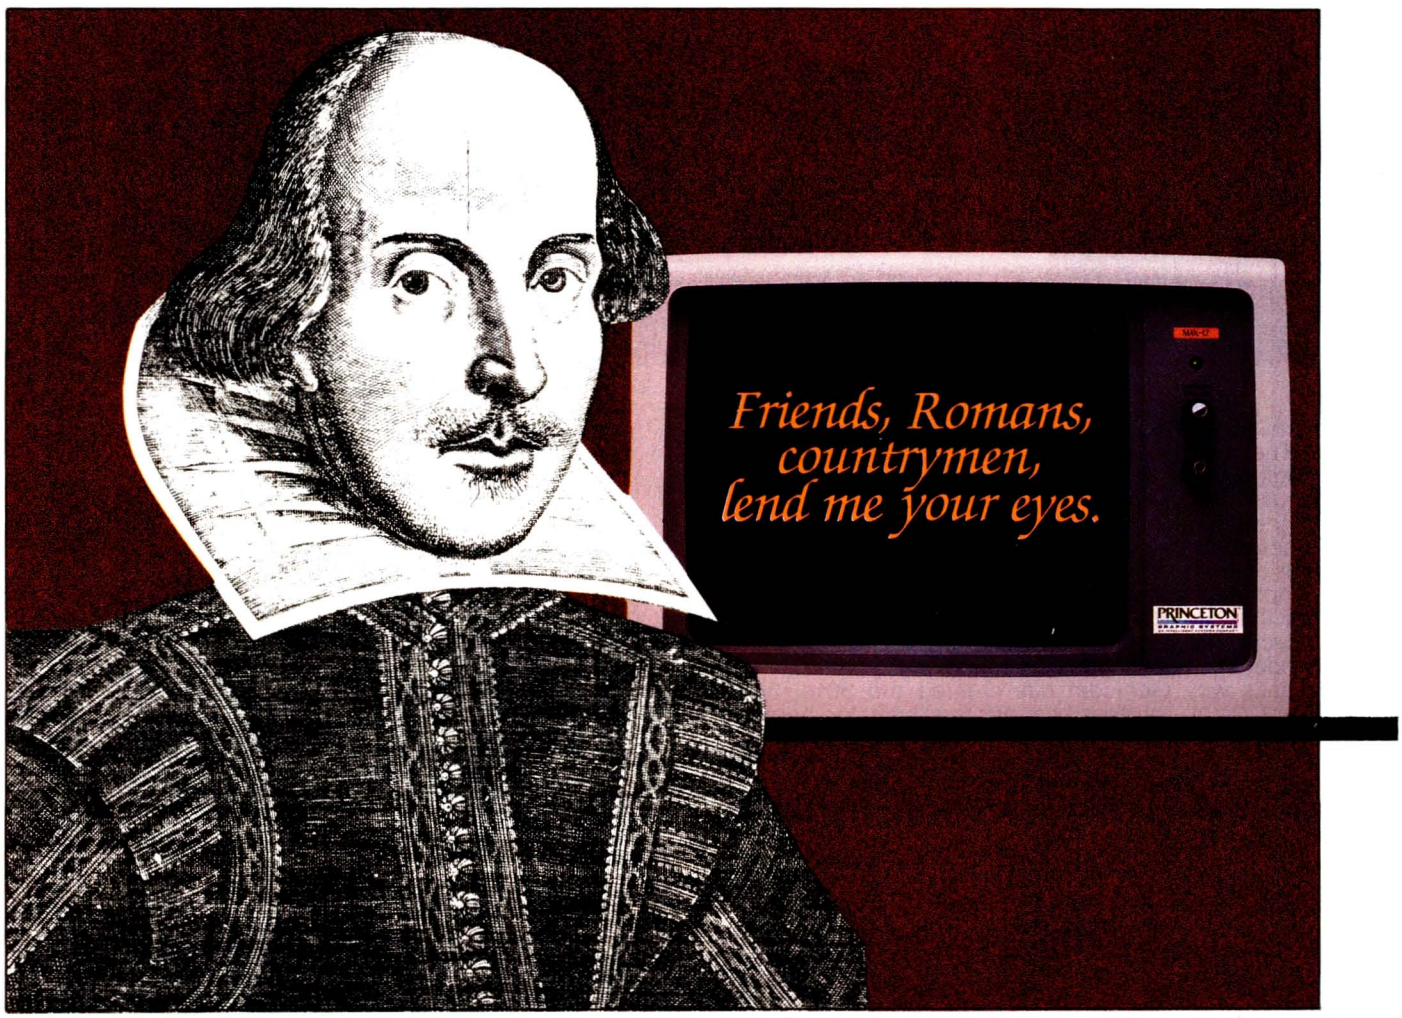

W. Shakespeare composing Great Ideas on a Princeton Monitor

Things you should know about monitors

Resolution The quality of a color monitor's image is directly related to its resolution. The greater the number of dots available within a given area for displaying an image the greater the resolution.

The PRINCETON SR-12 monitor features an extraordinary 640x480 (non-interlaced) resolution. The result is an extremely high quality, flickerless image with text that approaches monochrome quality. When used in conjunction with the PRINCETON Scan-Doubler card, the SR-12 runs from a standard IBM or equivalent color card, maintaining complete compatibility with all IBM software.

Dot pitch The image on an RGB color monitor is made up of a series of tiny dots. Dot pitch measures the distance between those dots. Anything finer than .38mm is considered high resolution.

The PRINCETON HX-12 RGB color monitor, with a dot pitch of .31mm, offers the finest resolution in its class. The HX-12 delivers 16 crisp, sharp colors including clean whites without color bleed—a not-so-easy accomplishment in an RGB monitor.

Price All Princeton monitors set the price/performance standard in their class. The SR-12 at $799 compares favorably with monitors costing hundreds more. The HX-12 is in a class by itself at $695.

The PRINCETON MAX-12, with easy-on-the-eyes amber phosphor, sets the standard for monochrome monitors at $249. The MAX-12's dynamic focusing circuitry ensures sharpness not only in the center but also in the edges and corners. And it runs off the IBM PC monocard—no special card is required.



All three monitors feature a non-glare screen and an IBM compatible cable. A PCjr adapter cable is also available for the HX-12. And to see your Great Ideas from the best possible angle, you can put your Princeton monitor on the Princeton Undergraduate Tilt and Swivel Base for only $39.95. **Or, while supplies last, get the Undergraduate FREE with the purchase of a MAX-12 monitor.**

Image The ultimate test of any monitor is how the image looks to your own eyes. Compare the Princeton monitors side-by-side with the competition at Computerland, Entre or your local independent dealer.

Do it soon. You and your Great Ideas deserve the best.

For more information call toll-free:
800-221-1490 Ext. 804

PRINCETON™
GRAPHIC SYSTEMS
AN INTELLIGENT SYSTEMS COMPANY

170 Wall Street
Princeton NJ 08540
TLX 821402 PGS Prin

Technologically tuned for excellence

Inquiry 281

YOUR PC CAN BE YOUR NEXT SMART TERMINAL.
SmarTerm software can make your personal computer a lot more intelligent than it really is.

Our terminal emulators have the features that do the job: Full keyboard emulation. Multiple setups. TTY mode. "Smart" softkeys. Printer support. Help screens. And a friendly user manual.

Built-in text and binary file transfer is powerful and simple to use, and does not require any special host software. SmarTerm also features automatic file transfer and two different "error-free" protocols, including XMODEM.

There's a SmarTerm emulator that matches your needs: **SmarTerm 100** for emulation of DEC VT100, VT102 and VT52. This program now features 132-column display mode support, using either horizontal scrolling or special 132-column video display boards. **SmarTerm 125** includes all the features of SmarTerm 100, plus VT125 ReGIS graphic support. **SmarTerm 400** for emulation of Data General Dasher D100, D200 and D400.

More than 15,000 customers have discovered just how smart their PCs can be with SmarTerm. We think you'll agree. Try it for 30 days with full refund privilege.

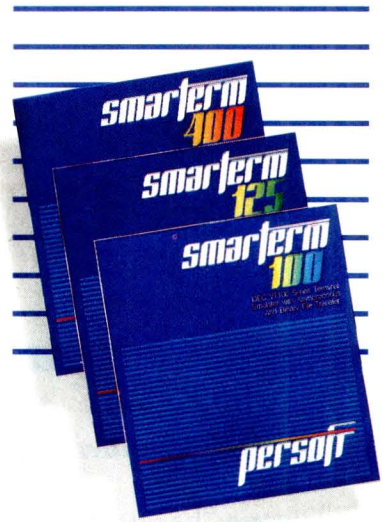

IN A WORLD OF CHANGE, THE SMART GET SMARTERM™

Call today for more information.

Available through your local software dealer, or
Persoft, Inc.,
2740 Ski Lane,
Madison, WI 53713.
Phone (608) 273-6000.
TELEX 759491.

SMARTERM is a trademark of Persoft, Inc. • DEC, VT and ReGIS are trademarks of Digital Equipment Corp. • Dasher is a trademark of Data General Corp. • IBM is a registered trademark of International Business Machines Corp.

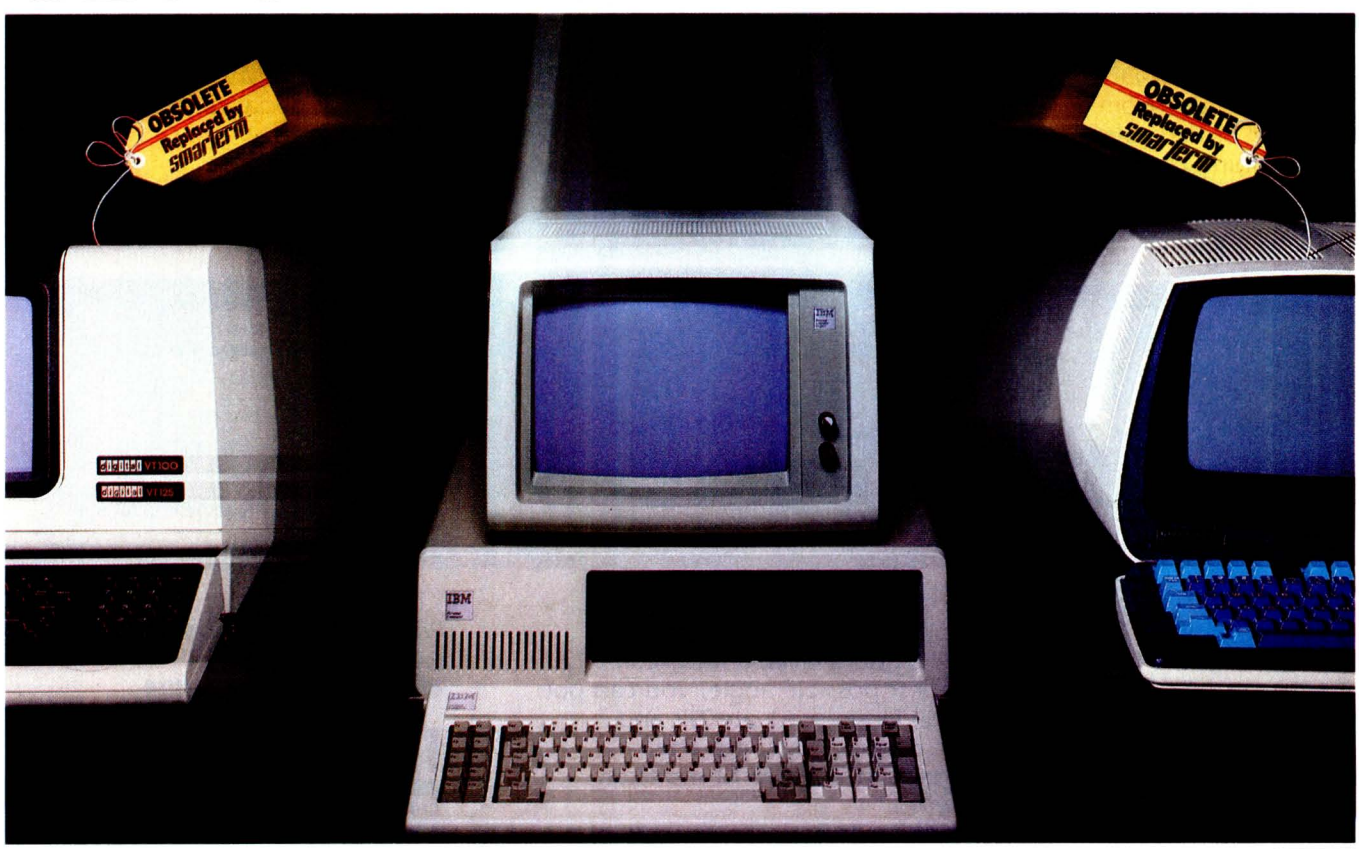

persoft

Inquiry 377

E·V·E·N·T Q·U·E·U·E

January 1985

● **DEVELOPMENT SEMINARS**—Professional Development Seminars, various sites throughout the U.S. The Institute for Advanced Technology presents seminars in a variety of areas, including data communications, database management, software engineering, CAD/CAM, personal computers, office automation, and personnel management. A catalog is available. Contact Institute for Advanced Technology, 6003 Executive Blvd., Rockville, MD 20852, (800) 638-6590; in Maryland, (301) 468-8576. *January–February*

● **NETWORK TROUBLESHOOTING**—A Troubleshooting Guide to Supporting and Maintaining the Data Communications Network, various sites throughout the U.S. This seminar outlines a systematic approach to network maintenance methods and procedures, presents specific troubleshooting techniques, and explains software tools. For more information, contact Data-Tech Institute, Lakeview Plaza, POB 2429, Clifton, NJ 07015, (201) 478-5400. *January–February*

● **PROCESSING FUNDAMENTALS**—Fundamentals of Data Processing for Administrative Assistants and Secretaries and Fundamentals of Information Processing for Nontechnical Executives, various sites throughout the U.S. Two-day seminars. Contact New York University, School of Continuing Education, Seminar Center, 575 Madison Ave., New York, NY 10022, (212) 580-5200. *January–March*

● **TECH, MANAGEMENT SEMINARS**—Technical and Management Seminars for Professionals, various sites throughout the U.S. Major topic areas include networking, system performance and data management, and real-time applications design. A catalog is available. Contact Digital Equipment Corp., Educational Services, Seminar Programs BUO/E58, 12 Crosby Dr., Bedford, MA 01730, (617) 276-4949. *January–March*

● **INTENSIVE SEMINARS** Intensive Seminars for Professional Development, various locations in the Boston metropolitan area, Syracuse, NY, and Saddle Brook, NJ. Computer, management, and manufacturing seminars are offered. A catalog is available. Contact Kathy Shaw, Office of Continuing Education, Worcester Polytechnic Institute, Higgins House, Worcester, MA 01609, (617) 793-5517. *January–June*

● **SME CONFERENCES, EXPOS**—Conferences and Expositions from the Society of Manufacturing Engineers, various sites throughout the U.S. For a calendar, contact the Society of Manufacturing Engineers, Public Relations Department, One SME Dr., POB 930, Dearborn, MI 48121, (313) 271-0777. *January–November*

● **BUSINESS COMMUNICATIONS**—The Second Annual Business Telecommunications Exposition: BizTelCom Northeast, Aspen Hotel-Manor, Parsippany, NJ. Seminars and product displays. Preregistration is complimentary; $10 at the door. Contact Michael C. J. Houston, T. E. G. Inc., The Exposition Group, 83 Barnegat Blvd., Barnegat, NJ 08005, (609) 698-7020. *January* 16–18

● **MEASUREMENT SCIENCE** Measurement Science Conference, Marriott Hotel, Santa Clara, CA. Technical sessions will explore such topics as laser and optical-fiber metrology, time and frequency measurements, and the effects of data networks on calibration. Exhibits and formal addresses highlight this event. Registration details are available from Darlene Diven, Measurement Science Conference, POB 61344, Sunnyvale, CA 94088-1344, (408) 756-0270. *January* 17–18

● **C WORKSHOP** C Programming Workshop, Raleigh, NC. Contact Suzanne B. Battista, Plum Hall Inc., 1 Spruce Ave., Cardiff, NJ 08232, (609) 927-3770. *January* 21–25

● **IN-FLIGHT COMPUTING EXPLORED**—Meeting of the Radio Technical Commission for Aeronautics, Washington, DC. An industry committee will look into the possible effects that battery-operated portable computers may have on an airplane's navigational equipment. The committee, called SC-156, meets at 9:30 a.m. Contact the Radio Technical Commission for Aeronautics, Suite 500, 1425 K St. NW, Washington, DC 20005. *January* 22–23

● **MICROS, COMMUNICATIONS, AND BUSINESS** Microspeak '85, San Francisco, CA. This conference will focus on ways to set up a cost-effective microcomputer communications system. The fee is $695. Contact Stephen J. Schneiderman, Micro Communications, 500 Howard St., San Francisco, CA 94105, (415) 397-1881. *January* 22–24

● **SEMICONDUCTOR EQUIPMENT, CONFERENCE** Advanced Semiconductor Equipment Exposition and Technical Conference, Convention Center, San Jose, CA. Admission to the show is free with preregistration. Contact Joyce Estill, ASEE '85 Show Manager, Cartlidge & Associates Inc., 1101 South Winchester Blvd. #M259, San Jose, CA 95128, (408) 554-6644. *January* 22–24

● **TECH CONFERENCE, TUTORIALS**—USENIX Association Technical Conference and Tutorials, Fairmont Hotel, Dallas, TX. Contact USENIX Conference Office, POB 385, Sunset Beach, CA 90742, (213) 592-1381. *January* 23–25

● **COURSEWARE TIPS** Selecting and Evaluating Instructional Courseware, Princeton, NJ. This seminar shows teachers how to identify sources and the effectiveness of educational

(continued)

IF YOU WANT *your organization's public activities listed in BYTE's Event Queue, we need to know about them at least four months in advance. Send information about computer conferences, seminars, workshops, and courses to BYTE, Event Queue,* POB 372, *Hancock,* NH 03449.

"There's no magic to using your personal computer for data acquisition."

Fred Molinari, President

There's no trick to it.

Just take your choice of our new single board plug-ins and bring complete analog and digital I/O capabilities to your personal computer.

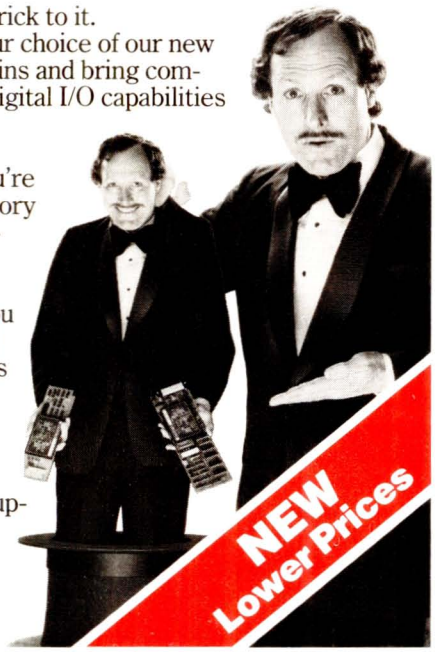

Whether you're working in laboratory research or industrial process control, our single boards can give you measurement and control capabilities without having to spend big bucks.

And who knows that better than the leading supplier of low cost data acquisition boards, systems, and software?

Our boards include A/D with programmable gain, D/A, digital I/O, clock and direct memory access capabilities. With power and performance to match your PC, our analog interfaces provide 12 or 16-bit A/D resolution and direct connection for high or low level signal inputs.

And these boards just plug into the PC's backplane. No messy external boxes or cables. User input connections are simple with our compatible line of screw terminal panels.

DATA ACQUISITION FOR PC'S

	12-BIT A/D	12-BIT D/A	DIGITAL I/O	PROG CLOCK	SOFTWARE LIBRARY
IBM PC™	X	X	X	X	X
APPLE II™	X			X	
TI PROFESSIONAL™	X	X	X	X	X
DEC RAINBOW™	X	X	X	X	X
COMPAQ™ Portable	X	X	X	X	X



Comprehensive user manuals with many programming examples get you up and running fast.

So why look any further? No other analog I/O systems can offer PC users such quality, power and performance for such a reasonable price.

After all, making data acquisition easy is what we're all about.

And that's no illusion.

Call (617) 481-3700,

Data Translation is the leading supplier of personal computer hardware and software for data acquisition and control.

DATA TRANSLATION

World Headquarters: Data Translation Inc., 100 Locke Dr., Marlboro, MA 01752 (617) 481-3700 T1x 951-646.
European Headquarters: Data Translation, Ltd., 430 Bath Rd., Slough, Berkshire SL1 6BB England (06286) 3412 T1x 849-862.
In Canada: (416) 625-1907.
IBM PC is a registered trademark of IBM. Apple II is a registered trademark of Apple Computer Corp. TI Professional is a registered trademark of Texas Instruments, Inc. DEC Rainbow is a registered trademark of Digital Equipment Corp. COMPAQ is a registered trademark of COMPAQ Computer Corp.

Inquiry 103

courseware, how to evaluate courseware, and how to select and use courseware directories, clearinghouses, databases, and published reviews. Hands-on experience is provided. The fee is $125. Contact Educational Testing Service, Princeton, NJ 08541, (609) 734-1108. *January* 24

● **INFO ON TELECOMM**
Finding Telecommunications Information, AMFAC Hotel, Burlingame, CA. This seminar explains how to find and stay up-to-date with information on the telecommunications industry. For seminar details, contact Christopher Sterling at (202) 676-8243. For registration details, contact Phillips Publishing Inc., Suite 1200 N, 7315 Wisconsin Ave., Bethesda, MD 20814, (301) 986-0666. *January* 28–29

● **FAULT-TOLERANT DESIGN**—Introduction to Fault-Tolerant Microcomputer Systems, Sheraton Mockingbird Hotel, Dallas, TX. This course introduces attendees to various topics in fault-tolerant computing, including fault classification, detection, diagnosis, and recovery; error correction and detection; microprocessor testing; and redundancy techniques. The fee is $650. Contact William C. Dries, University of Wisconsin-Extension, Department of Engineering & Applied Science, 432 North Lake St., Madison, WI 53706, (800) 362-3020; in Wisconsin, (608) 262-2061. *January* 28–30

● **INSTRUCTIONAL COMPUTING CONFERENCE**
The 1985 Florida Instructional Computing Conference, Sheraton Twin Towers Convention Center and Howard Johnson's Florida Center Hotel, Orlando, FL. This fifth annual conference will feature more than 100 sessions on instructional and administrative computing as well as general conference sessions. More than 130 companies will exhibit. Contact the Florida Department of Education, Educational Technology Section, Knott Building, Tallahassee, FL 32301, (904) 487-3104. *January* 28–31

● **ADVANCED C TOPICS**
Advanced C Topics Seminar, Raleigh, NC. Contact Suzanne B. Battista, Plum Hall Inc., 1 Spruce Ave., Cardiff, NJ 08232, (609) 927-3770. *January* 28–*February* 1

● **GERMAN TRADE SHOW**
Micro-Computer '85, Hall #4, Fairgrounds, Frankfurt, West Germany. More than 200 exhibitors of hardware, software, accessories, and services will display their wares. Other features include seminars, workshops, and discussions. Contact Mr. Philippe Hans, German American Chamber of Commerce, 21st Floor, 666 Fifth Ave., New York, NY 10103, (212) 974-8856. *January* 29–*February* 3

February 1985

● **COMPUTER COURSES**
Courses from Integrated Computer Systems, various sites throughout the U.S. Among the courses to be offered are "Digital Image Processing" and "Modern Pattern Recognition Systems." Course fees are $945. Contact Ruth Dordick, Integrated Computer Systems, 6305 Arizona Place, POB 45405, Los Angeles, CA 90045, (800) 421-8166; in California, (800) 352-8251 or (213) 417-8888; in Canada, (800) 228-6788. *February–March*

● **LANGUAGE COURSES**
Courses from The Micro-

Engine Company, Johannesburg, Republic of South Africa. Courses in UNIX, C, and Pascal are offered. Contact Laurie Butgereit, The MicroEngine Co. (Pty) Ltd., POB 78992, Sandton, 2146, Republic of South Africa, (011) 789-1736. *February–March*

● SPECIAL EDUCATORS Computers & Reading/Learning Difficulties, Third Annual Western States Conference, Los Angeles, CA. Sixty presentations and hands-on workshops will explore the use of computers in reading, language arts, and learning difficulties. Educational materials will be exhibited. Workshop fees are $55, and conference fees are $55 and $95. Contact Educational Computer Conferences, 1070 Crows Nest Way, Richmond, CA 94803, (415) 222-1249. *February* 1–2

● AUTOMATED FACTORY EXPLORED—Automated Manufacturing, Don CeSar Hotel, St. Petersburg, FL. Contact Eleanor Bernet, Frost & Sullivan Inc., 106 Fulton St., New York, NY 10038, (212) 233-1080. *February* 4–5

● TECHNOLOGY AND THE OFFICE—The 1985 Office Automation Conference, Georgia World Congress Center, Atlanta, GA. The theme for the sixth annual Office Automation Conference is "Today's Partnership: People and Technology." More than 45 technical sessions are planned. Full-conference preregistration fees are $100, which includes admission to the exhibit area. Student, one-day, and exhibit-only rates are $10, $40, and $30, respectively. Full-conference registration at the door is $125. Contact OAC '85, American Federation of Information Processing Societies Inc., 1899 Preston White Dr., Reston, VA 22091, (703) 620-8952. *February* 4–6

● PROLOG INSTRUCTIONS Prolog Workshop, New York City. A hands-on program in Prolog, running under UNIX. Subjects covered include the fundamentals of logic programming with Prolog, artificial intelligence representation techniques, and expert system design. Participants should be familiar with a high-level language. Contact Keith Eisenstark, Structured Methods Inc., 7 West 18th St., New York, NY 10011, (212) 741-7720. *February* 4–7

● SIMULATION AND MODELING—Simulation and Modeling with SIMSCRIPT II.5, Westpark Hotel, Arlington, VA. This course serves as an introduction to the concepts of simulation and model building using SIMSCRIPT II.5, a programming language tailored for simulation analysts, model builders, engineers, and computer scientists. The fee is $850. Contact Ed Russell, CACI, 12011 San Vicente Blvd., Los Angeles, CA 90049, (213) 476-6511; on the eastern seaboard, call Carl Joeckel, (215) 628-3701. *February* 4–8

● MANUFACTURING EXPO Florida Computer Manufacturing Expo, Centroplex Expo Center, Orlando, FL. Hardware, software, peripherals, and accessories will be displayed. A seminar program is planned. Contact Great Southern Computer Shows, POB 655, Jacksonville, FL 32201, (904) 356-1044. *February* 5–8

● STRIDE TO FAIRE Stride Faire '85, MGM Grand Hotel/Casino, Reno, NV. This is the second annual technical trade fair sponsored by Stride Micro, formerly

(continued)

ShuffleBuffer™

RAPS!

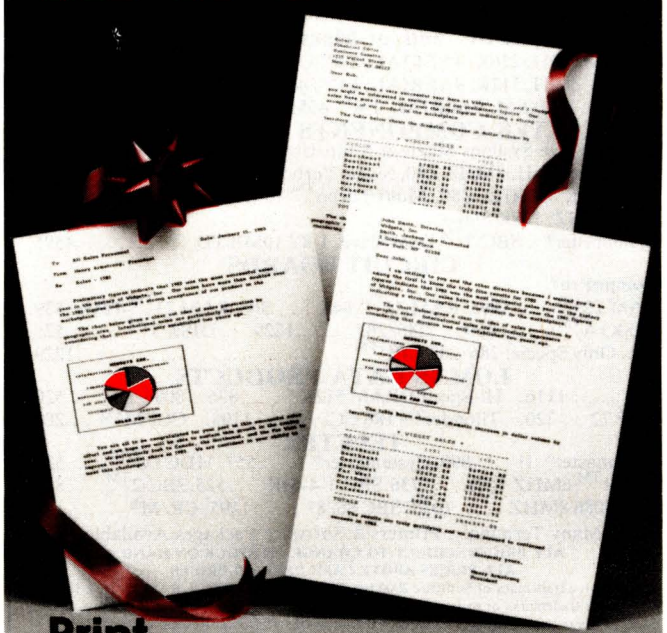

Print

- spreadsheets
- text
- graphics

in any order!

ShuffleBuffer™

- Has Random Access Printing . . . an intelligent processor which stores phrases, passages, entire letters, spreadsheets, graphics and commands, then prints the information in whatever order you want, as many times as you want.
- Has FIFO printing (first-in, first-out) . . . acts as a reservoir, accepts data at computer speed, prints on its own, freeing the computer for further tasks.
- Has BYPASS Printing . . . permits interruption of long-term buffer operations for straight-thru short-term printing.

PLUS

Data compression . . . expands memory storage to 4 times. Infinite copy capability. Simple erase feature to clear buffer. Compatible with virtually any serial or parallel computer, serial or parallel printer (letter quality or dot matrix) as well as plotters and modems.

WRAP it all up with SHUFFLE/BUFFER!

Call or write for the dealer nearest you:

Interactive Structures Inc.
146 Montgomery Avenue
Bala Cynwyd, PA 19004
Telephone: (215) 667-1713



Inquiry 176

COMPETITIVE EDGE

P.O. BOX 556 • PLYMOUTH, MI 48170 • (313) 451-0665

LOMAS DATA PRODUCTS INC.

Thunder™ 186, 256K, 2-5" DRS, CCP/M-86 ..... $1995.
Thunder™ 186, 256K, 2-5", 10MB HD, CCP/M-86 ..... 3295.
Thunder™ 186, 512K, 2-5", 10MB HD, MCCP/M-86 ..... 3895.
ABOVE THUNDER SYSTEMS INCLUDE 8080 EMULATOR
LDP S-100-PC ..... $2395. LDP S-100-PCTM ..... 5495.

CompuPro® and/or Macrotech Components

MT286/Z80H, 256K, 4 SERIAL, 2-8" DRS CCP/M™ ..... 5095.
MT286/Z80H, 512K, 9 SERIAL, 1-8", 40MB HD, CCPM ..... 7895.
286/287, 8080 EM, 9 SERIAL, 1-8", 40MB HD, CCPM ..... 8095.

TELETEK COMPONENTS CE INTEGRATED

Master/Slave Systems Single & Multi-User
Systemaster® II, 8MHZ Z80, Single Turbo 2-8" ..... 2695.
Sysmas II, 8MHHZ Z80, Multi Turbo™ 10MB 1-8"
Two 6MHZ, 128K Slaves ..... 5595.
Systemaster® , SBC-2™ Dual Slave, 1-8" 10MB TD ..... 4595.

CIRCUIT BOARDS

CompuPro®
RAM 22™ . . . $995. RAM 23™-64K . . . 308. RAM 23™-128K . 539.
DISK1A™ . . . . 459. 286/287 . . . . 1229. DISK 3™ . . . . 525.
Jan. Only Special 286/287 CPU™ ..... 1229.

LOMAS DATA PRODUCTS

286 . . . . 1116. Hi-Speed DRAM 512K . . . . 876. 8086-1 . . . . 520.
LDP 72 . . 220. Thunder™ 186 CCP/M . . 1195. CCPM™ . . 280.

TELETEK

Systemaster® II . . . . 899. Systemaster® . . . . 557. HDCTC™ . . . . 525.
SBC-1™ 6MHZ 128K . . . . 736. SBC-1-4-64K . . . . 525. SBC-2™ . . . . 837.
SBC 8086 8MHZ . . . . . 1035. SBC 86/87 . . . . . 1195. CP/M® . . . . . 135.

Many Terminals, Printers & Software Packages Available
ALL PRICES SUBJECT TO CHANGE ON STOCK ON HAND
ALL PRICES ABOVE CASH PREPAID PRICES

Turbodos is a trademark of Software 2000 Inc. 286/287 CPU, RAM 22, RAM 23, Disk 1a, Disk 3 are either trademarks or registered trademarks of CompuPro® a Godbout Company. CP/M, CCP/M are either trademarks or registered trademarks of Digital Research Inc.
Thunder 186, Color Magic, LDP 72, are trademarks of LDP Inc. Systemaster, Systemaster II, SBC-1, SBC-2 HDCTC are either trademarks or registered trademaeks of Teletek Enterprises Inc.

Introducing USER-PORTABILITY with the

Virtual/Volume/Manager™ 1.0

The user's common link to:

MS™-DOS, PC™-DOS
UNIX,™ Xenix™ — VVM™ — UCSD p-System®
CP/M® 2.2,3.0,86,68K

VVM, the Virtual/Volume/Manager, is a screen-oriented directory maintenance utility and working environment. Even if you don't need to be USER-PORTABLE, you'll still love its features:

- use as a utility or visual shell
- spreadsheet-like file cursor
- full set of single-key directory commands includes file viewing or directory changes
- multi-column or single column extended info
- simple macro commands
- full color support with user-defined schemes
- Microsoft® mouse support for PC-DOS version

Available NOW for: PC-DOS, MS-DOS, CP/M 86, UCSD p-System
Coming SOON for: CP/M 2.2, 3.0, 68K, UNIX, Xenix, UNIX work-alikes

$44.95*

MicroTASK, Inc. (919) 851-9045 For MC/VISA
Suite 345, 6040-A Six Forks Road, Raleigh, NC 27609

* Add $5.00 shipping inside USA, $15.00 outside USA (payment by bank draft payable in the U.S.). North Carolina residents add 4.5% sales tax. Payment by MC/VISA/check/money order only. Dealers and OEM's call.

Trademarks: VVM, Virtual/Volume/Manager, MicroTASK - MicroTASK, Inc.; MS, Xenix - Microsoft Corporation; UNIX - Bell Laboratories; PC-DOS - International Business Machines Corporation.
Registered Trademarks: CP/M - Digital Research, Inc.; Microsoft - Microsoft Corporation; UCSD p-System - The Regents of the University of California.

EVENT QUEUE

known as Sage Computer. Contact Laura Smith, Stride Micro, 4905 Energy Way, Reno, NV 89502, (702) 322-6868. *February* 8–10

● SOFTWARE MANAGEMENT CONTROL—Configuration Management of Software Programs, San Diego, CA. Intended to show those working in software management how to control development, maintenance, and operational costs. Familiarity with MIL-STD 480, 483, and 490 is helpful, but there is no prerequisite for this course. The cost is $730. Contact Stod Cortelyou, Continuing Engineering Education, George Washington University, Washington, DC 20052, (800) 424-9773; in the District of Columbia, (202) 676-8520. *February* 11–13

● NETWORK COMPONENTS EXPLAINED Data Communications Network Components, Atlanta, GA. This course provides a thorough overview of the use, operation, applications, and acquisition procedures of 25 major communications components. The fee is $795. Contact Elaine Hadden Nicholas, Department of Continuing Education, Georgia Institute of Technology, Atlanta, GA 30332-0385, (404) 894-2547. *February* 12–14

● INTERACTIVE INSTRUCTION—The Third Conference on Interactive Instruction Delivery, Sheraton Towers Hotel, Orlando, FL. Contact the Society for Applied Learning Technology, 50 Culpeper St., Warrenton, VA 22186, (703) 347-0055. *February* 13–15

● COMPUTERS FILL EDUCATORS' TALL ORDER The Fifth Annual Conference of the Texas Computer Education Association, Hyatt Regency Hotel, Austin, TX. The theme for this conference is "New Directions for Education Using Modern Day Technology." Contact TCEA Conference, POB 2573, Austin, TX 78768. *February* 13–16

● PC SYMPOSIUM The 1984 UNM Personal Computer Symposium, University of New Mexico, Albuquerque. The second annual Personal Computer Symposium will feature exhibits, seminars, and demonstrations of personal computer systems of interest to businesspeople, educators, and professionals. Contact the Tau Beta Pi Honor Society, c/o Dr. Randy Truman, Department of Mechanical Engineering, University of New Mexico, Albuquerque, NM 87131, (505) 277-6296. *February* 15–16

● COCO CONVOCATION Rainbowfest, Irvine Marriott, Irvine, CA. A show for users of the Radio Shack TRS-80 Color Computer. More than 50 exhibitors are expected. Contact Falsoft Inc., POB 385, Prospect, KY 40059, (502) 228-4492. *February* 15–17

● SOFTWARE UPDATE The Second Annual International Software Update, Waiohai Resort Hotel, Kauai, HI. An international lineup of speakers will focus on domestic and international marketing concerns and future trends in microcomputer software. Attendance is limited. Contact Raging Bear Productions Inc., Suite 175, 21 Tamal Vista Dr., Corte Madera, CA 94925, (800) 732-2300; in California, (415) 924-1194. *February* 16–20

● MICROS FOR EDUCATORS—Association of Teacher Educators National Conference, Riviera Convention and Resort Hotel, Las Vegas, NV. Exhibits and

(continued)

Softline

THE PROFESSIONAL'S CHOICE

WORD PROCESSING/ EDITORS

Easywriter II System	$219
Fancy Font	$159
Final Word	$189
Microsoft Word	$239
Microsoft Word/Mouse	$299
Multimate	$269
PeachText 5000	$199
PFS: Write	$ 95
Samna Word III	$Call
Volkswriter Deluxe	$169
The Word Plus (Oasis)	$109
Word Perfect (SSI)	$249
WordPlus-PC with The Boss	$319
WordStar	$219
WordStar Professional (WS/MM/SS/SI)	$279
WordStar Options Pak (MM/SS/SI)	$189
XYWrite II+	$229

SPREADSHEETS/ INTEGRATED PACKAGES

Aura 5	$329
Electric Desk	$229
Framework	$369
Integrated 7	$339
Jack 2	$329
Lotus 1-2-3	$309
Multiplan	$135
Open Access	$299
Smart System	$579
SuperCalc 3	$219
Symphony	$429
TKI Solver	$269
VisiCalc IV	$159

COMMUNICATIONS/ PRODUCTIVITY TOOLS

Crosstalk	$119
Memory Shift	$ 79
Move It	$109
Prokey 3.0	$ 95
Relay	$ 99
Smartcom II	$109

DATABASE SYSTEMS

Alpha Data Base Manager II	$179
Condor III	$299
dBase II	$279
dBase III	$369
DBplus	$ 89
Friday	$179
InfoStar+	$289
Knowledgeman	$299
PFS: File/PFS: Report	$169
Powerbase	$239
QuickCode	$159
R:base 4000	$269
TIM IV	$249
Versaform	$249

LANGUAGES/UTILITIES

Concurrent w/Windows	$219
Digital Research C Compiler	$219
DR Fortran 77	$219
Lattice 'C'	$299
Microsoft C Compiler	$309
MS Basic Compiler	$249
MS Fortran	$239
Norton Utilities	$ 59

PROJECT MANAGEMENT

Harvard Project Manager	$239
Microsoft Project	$169
Scitor Project 5000	$299
VisiSchedule	$199

ACCOUNTING MODULES

BPI Accounting	$369
IUS EasyBusiness System	$319
MBA Accounting	$369
Open Systems Accounting	$429
Peachpak 4 (GL/AP/AR)	$239
Peachtree Accounting	$299
Real World Accounting	$469
Star Accounting Partner (GL/AP/AR/PAY)	$249
Star Accounting Partner II	$699

GRAPHICS/STATISTICS

Abstat	$279
BPS Business Graphics	$229
Chartmaster	$259
DR Draw	$199
Energraphics w/Plotter	$319
Execuvision	$279
Fast Graphs	$219
Graphwriter Combo	$399
MS Chart	$169
PC Draw	$279
PFS: Graph	$ 95
Signmaster	$199
Statpak-NWA	$329
Statpac-Walonick	$299

PROFESSIONAL DEVELOPMENT

Management Edge	$169
Think Tank	$129

HOME/PERSONAL FINANCE

Dollars and Sense	$119
Financier II	$119
Home Accountant Plus	$ 99
Sundex-CPA	$109

HARDWARE/ PERIPHERALS*

AST Six Pack Plus (64k)	$269
Quadboard (0k)	$Call
Hayes 1200B with Smartcom	$399
Hayes Smartmodem 1200	$489
Keytronic 5151 DLX	$209
IRMA	$995
Hercules Graphics Board	$349
Epson FX-100 Printer	$Call
Comrex II Printer	$Call
C Itoh Prowriter	$Call
Okidata 93A	$689
Toshiba P1351 Printer	$Call
64K Memory	$ 55

*Call for shipping.

Lotus 1-2-3 $309	Symphony $429
dBase III $369	FrameWork $369
MultiMate $269	Volkswriter DLX $169
R:base 4000 $269	WordStar Professional $279
AST 6 Pak Plus $269	Smartmodem 1200B $399
Quad Board Expanded 64K $279	Smartmodem 1200 $489

LOWEST PRICE GUARANTEE!!

We will match current nationally advertised prices on most products. Call and compare.

To Order call

1-800-221-1260

In New York State call **(718) 438-6057**

For technical support and information call (718) 438-6057

FREE!

Diskette Library Case

. . . with your order. This attractive case protects, indexes and stores 10 diskettes for quick retrieval. Normally a $10 value, it is now available ***FREE*** to Softline customers



TERMS:
Checks—allow 14 days to clear. Credit processing—add 3%. COD orders—cash, M.O. or certified check—add $3.00. Shipping and handling UPS surface—add $3.00 per item (UPS Blue $6.00 per item). NY State Residents—add applicable sales tax. All prices subject to change.

MasterCard VISA

Softline

Softline Corporation
P.O. Box 729, Brooklyn, N.Y. 11230
TELEX: 421047 ATLN UI


ARGET MARKET
WEST
NORTHEAST
EAST CENTRAL
IBM
Polaroid
Palette
Num Lock
Scroll Lock
TARGET MARKET
WEST
SOUTH
NORTHEAST
WEST CENTRAL
EAST CENTRAL
Polaroid
Instant Slide

Now last minute presentations can be made from your personal computer. In color. In house. In minutes.

Introducing Polaroid Palette.

Whether your presentation is in 30 minutes or 30 days, the new Polaroid Palette Computer Image Recorder will make it easier. Priced at under $1800*, it lets you make Polaroid instant 35mm slides or prints from personal computer-generated data. Right at your desk. So now you can create a presentation in minutes. Without sending out for processing, paying premiums for rush service or risking the security of your confidential information.

Works with the graphics packages of the IBM PC or XT, DEC Rainbow, Apple IIe and II+ as well as other pcs.

The Polaroid Palette is designed to work with many graphics software packages. In fact, when using such popular programs as Graphwriter, Chart-Master, Sign-Master, DR Draw and DR Graph, Palette can virtually double both the horizontal and vertical resolution of your monitor. Plus, a "backfill" feature reduces raster lines for a smoother, more finished appearance. The result—presentation quality slides. On-the-spot.

Color 35mm slides, even from a black and white CRT.

Think of it as an artist's palette. Because Palette "paints" your graphs, charts and text. You're choosing from up to 72 colors. If you don't want red, press a few keys—it's green. And if you're not the artistic-type, Polaroid has developed a menu of color sets: combinations of colors that have been specially coordinated to complement your presentations. And all of this is yours, even if you have a black and white monitor.

Lets you make last minute changes or add up-to-the-minute information.

The Polaroid Palette is the fast, convenient, low-cost way to prepare slides for your presentation. And perhaps even more important, Palette allows you to keep confidential information confidential. You won't have to send your work out to anyone again.

So why wait until the last minute to find out about Polaroid Palette? Call this toll-free number or return this coupon. Because with Palette you'll make your deadlines, in no time.

For a demonstration, call toll-free, or mail the coupon to Polaroid Corp., E.I. Marketing, Dept. 604, 575 Technology Sq., Cambridge, MA 02139.

CALL 1-800-225-1618

☐ Send information. ☐ Have representative call.

B-1/85

Name _____ Title _____

Company _____

Address _____

City _____ State _____ Zip _____

Telephone ( ) _____

PC make and model _____

Polaroid

Suggested list price. Polaroid

Inquiry 279

FRIENDLY SERVICE AT A FRIENDLY PRICE

Friendly Computer Center, Inc.

1381 Coney Island Avenue, Brooklyn, New York 11230

FRIENDLY COMPUTER Satisfaction Guarantee: refund or exchange within 14 days (less shipping) if returned in original MINT CONDITION with all papers (as shipped)

Must Have It Immediately? Ask for GREEN LIGHT SERVICE For Same Day Shipment

EPSON

RX 80	219	RX 100	399
RX 80 ft	279	FX 100	589
FX 80	359	LQ 1500	1095
JX 80 color	599		
Titan 2 Board for QX-10			

NEW LOW PRICES!

FREE GIFT WITH EVERY PURCHASE

APPLE

APPLE IIe! Entry System

NEW APPLE DUODISK DRIVE W/EXTENDED 80 COLUMN CARD IN STOCK—MACINTOSH CALL

NEWAPPLE IIC $895

DISK DRIVES-FOR IBM

Teac ½ ht DS/DD	149
Rana 2000 IBM	149

ADD ON BOARDS FOR IBM

AST Six Pack Plus	249.00
Quadram Expanded Quadboard w/64K	259.00
Hercules Graphics Board	319.00
Hercules Color Card w/Parallel Port	179.00
Koala Speed Key System	149.00
Mouse Systems House w/Mouse w/P.C. Paint and Menue	159.00
Hayden Saragon III Chess	34.90
Microsoft Flight Simulator II	37.90
Hayden Saragon III for Mac	39.90
De Base III	389.00
Framework	419.00
SYMPHONY	CALL

MODEMS

Hayes 1200B IBM	379.00
Hayes 1200 RS232	459.00
Hayes 300 RS232	195.00
Micromoden IIE w/ Software	235.00
New Hayes 2400	CALL
Racal-Vadic 1200 EXT-RS-232	429.00
Raca.-Vadic Internal w/George Software	419.00
Compuserve Starter Kit	28.95
The Source Starter Kit	28.95
Grappler Bufferd Plus 16K w/cable	149.00

FLOPPY DISCS

Verbatim Datalife w/Free Head Cleaner and Storage Case S.S/D.D box of 10	22.95
D.S./D.D. box of 10	29.95

IBM

MONOCHROME PRO PACKAGE $2249

- IBM® PC 64K
- 2-320K DS/DD DRIVES
- MONOCHROME DIS PLAY CARD
- MONOCHROME MONITOR

LEADING EDGE PC — CALL

MONITORS

Princeton HX-12 Graphics	459.00
New Amdek Color 300	269.00
New Amdek Color 700-Ultra Hires RGB	499.00
Amdek 310A	175.00
Comrex 5650 Hires 12" Green	89.00
Gorilla 12" Green	89.00

PRINTERS

Juki-6100	369.00
Juki-6300	CALL
Juki-Tractor 6100	99.00
New Toshiba 1340	789.00
Toshiba 1351	1295.00

FOR MAIL ORDERS: Send Money Order, Certified Check, Mastercard, VISA gladly accepted. Add estimated price for shipping, handling and insurance. WE WILL SHIP ORDERS AT THE ADVERTISED PRICES GUARANTEED UNTIL JAN. 31, 1985

Apple is a registered trademark of Apple Computer, Inc. IBM is a registered trademark of International Business Machines.

TO ORDER CALL TOLL FREE (800) 258-5805 FOR ORDERS ONLY EXCEPT ALASKA HAWAII & N.Y.

FOR INFORMATION CALL (718) 252-9737

Friendly Computer Center, Inc.

1381 Coney Island Avenue Brooklyn, New York 11230

SNA X.25

NOT ANOTHER BLACK BOX—

A Software Implementation within Your Product Hardware

If you manufacture a computer system or a computer based product, allow it to EMULATE COMMUNICATE by installing one or more of Systems Strategies "C" Language based communication packages.

- 3270 SNA SDLC Emulation
- 3270 BSC Emulation
- 2780 3780 HASP Emulation
- X.25 Levels 1, 2, 3 Communication

You can purchase these "C" Language packages with source code and license to distribute in your hardware product. Each package is available either "Port it Yourself" with instruction manual and training or ported to your hardware by Systems Strategies' communications staff.

Systems Strategies/Advanced Technology Division
Specialists in Data Communications Software

Systems Strategies Inc.
225 West 34th Street
New York, New York 10001
(212) 279-8400

EVENT QUEUE

demonstrations of microcomputers, microcomputer products, and communications equipment will be featured. Contact Peter C. West, Learning Center, College of Education, Gabel Hall 8, Northern Illinois University, DeKalb, IL 60115, (815) 753-1241. *February* 18–19

● MANAGE YOUR COMPUTER—Managing Computer Resources, Wintergreen Learning Institute, Wintergreen, VA. Focuses on networking, system design, performance evaluation, and operational difficulties encountered by managers and executives. Rates include lodging and ski-lift tickets and vary from $570 to $769 depending on accommodations. Contact Dr. M. D. Corcoran, Wintergreen Learning Institute, POB 7, Wintergreen, VA 22958, (800) 325-2200; in Virginia, (804) 325-1107. *February* 18–22

● DIGITAL USERS MEET DECUS Canada Spring Symposium, L'Hotel, Toronto, Ontario, Canada. This symposium covers a variety of topics of interest to Digital computer users. Contact Jeanne McNeish, DECUS, 100 Herzbug Rd., POB 13000, Kanata, Ontario K2K 2A6, Canada, (613) 592-5111, ext. 2782. *February* 19–22

● COMMUNICATIONS FOR EXECS—Info/Central, O'Hare Exposition Center, Chicago, IL. This show and conference on computers and communications is tailored to the needs of executives and data-processing managers. Mainframes, microcomputers, telecommunications systems, and micrographics are a few of the areas to be addressed. Contact the Show Manager, Info/Central, 999 Summer St., Stamford, CT 06905, (203) 964-8287. *February* 20–22

● COMPUTERS IN EDUCATION—The Role of the Computer in Education 5, Arlington Park Hilton, Arlington Heights, IL. A range of topics of interest to educators will be presented. Contact Rick Nelson, The Role of the Computer in Education 5, Micro-Ideas, 2701 Central Rd., Glenview, IL 60025, (312) 998-5065. *February* 20–22

● BUSINESS GRAPHICS Computer Business Graphics, Bonaventure Intercontinental Hotel, Fort Lauderdale, FL. Contact Carol Every, Frost & Sullivan Inc., 106 Fulton St., New York, NY 10038, (212) 233-1080. *February* 20–23

● MAC IN SPOTLIGHT MacWorld Exposition, Brooks Hall, San Francisco, CA. A hands-on festival of Macintosh hardware, software, and peripherals. Contact World Expositions, Mitch Hall Associates, POB 860, Westwood, MA 02090, (617) 329-7466. *February* 21–23

● COMPUTER FAIRE The Fourth Annual IEEE Computer Faire, Huntsville, AL. Sponsored by the Institute of Electrical and Electronics Engineers Inc. For complete information, contact Terry Mizell, POB 5188, Huntsville, AL 35805, (205) 532-2036. *February* 22–23

● FARM AUTOMATION Agri-Mation, Palmer House Hotel, Chicago, IL. This conference and exposition will focus on the role of automation in agriculture. Contact the Society of Manufacturing Engineers, One SME Dr., POB 930, Dearborn, MI 48121, (313) 271-1500. *February* 25–28

● COMPUTING IN ANESTHESIA—Computing in Anesthesia '85, The Third International Seminar,

Miramar-Sheraton, Santa Monica, CA. Medical and computer specialists will describe their research and use of computers in data acquisition and display, computerized monitoring, instruction, education, database management, and knowledge-based systems. The registration fee is $300. Contact Program Chairman, Computing in Anesthesia '85, Anesthesiology Educational Foundation, Federal Building, POB 24230, Los Angeles, CA 90024, (213) 825-7561.
February 25–March 1

● SHORT COURSE FOR ENGINEERS—Dynamics on Microcomputers, University of Michigan-Dearborn. For information, contact R. E. Little, University of Michigan, 4901 Evergreen Rd., Dearborn, MI 48128, (313) 593-5241.
February 25–March 1

● HIGH-TECH IN FOCUS High-Tech '85 Exhibit and Seminar, Thunderbird Motel, Bloomington, MN. More than 100 manufacturers will exhibit computer terminals, peripherals, data-communications equipment, and digital test instruments. Admission is free. Contact John Bastys or Barb Mueller, Countryman Associates Co., 1821 University Ave., St. Paul, MN 55104, (612) 645-9151. *February 26–27*

● AUTOMATION FOR ELECTRONICS—Automated Design and Engineering for Electronics, Anaheim Hilton and Towers, Anaheim, CA. This conference and exposition covers the use of automation in the design of electronic circuitry. For further details, contact Michael Indovina, Cahners Exposition Group, Cahners Plaza, 1350 East Touhy Ave., POB 5060, Des Plaines, IL 60018, (312) 299-9311.
February 26–28

● MICRO-AIDED MANAGEMENT—Microcomputer-aided Maintenance Management System, Ramada Inn, Airport, Milwaukee, WI. This course is designed to show how computers can help improve the maintenance functions of any organization. The fee is $60. Contact Unik Associates, 12545 West Burleigh, Brookfield, WI 53005, (414) 782-5030.
February 27

March 1985

● FOSE SOFTWARE SHOW Federal Office Systems Exposition (FOSE) Software '85, Convention Center, Washington, DC. Four days of workshops, symposia, and exhibits of software. Contact Rosalind Boesch, National Trade Productions Inc., Suite 400, 2111 Eisenhower Ave., Alexandria, VA 22314, (800) 638-8510; in Virginia, (703) 683-8500. *March 4–7*

● MINI/MICRO Mini/Micro Southeast-85, Georgia World Conference Center, Atlanta. A conference and exposition. Contact Electronic Conventions Management, 8110 Airport Blvd., Los Angeles, CA 90045, (213) 772-2965.
March 5–7

● COMPUTER, COMMUNICATIONS SECURITY SECURICOM '85: The Third World Congress on Computer and Communications Security and Protection, Palais des Festivals et des Congrès, Cannes, France. Topic areas include electronic banking security, security implications of new media, security within microcomputers and distributed systems. Contact SEDEP, Expositions Department, 8, Rue de la Michodiere, 75002, Paris, France; tel: 742 41 00; Telex: 250303

(continued)

And then there were none.



The list of already extinct animals grows . . . the great auk, the Texas gray wolf, the Badlands bighorn, the sea mink, the passenger pigeon . . .

What happens if civilization continues to slowly choke out wildlife species by species?

Man cannot live on a planet unfit for animals.

Join an organization that's **doing** something about preserving our endangered species. Get involved. Write the National Wildlife Federation, Department 105, 1412 16th Street, NW. Washington, DC 20036.

It's not too late.

DOUBLES DISKETTE STORAGE SPACE!

REDUCES DISKETTE COST 50%!



Now! The back of 5¼" Diskettes can be used for data storage even with single head disk drives.

- ***NIBBLE NOTCH*®** Tools make it easy.
- Adds the Precise notch where it's needed.
- Doubles Diskette Space or Money Back!



NIBBLE NOTCH I
Cuts Square Notch for Apple, II, II+, IIe, IIc, III, Franklin & Commodore.
only **$14.95*** each

NIBBLE NOTCH II
Cuts Square Notch and ¼ inch round "index hole." For use with computers other than those shown for ***NIBBLE NOTCH I.***
only **$21.90*** each

DISK OPTIMIZER SYSTEM
Software for Apple, II, II+, IIe, III and Franklin

- Certifies your ***"new"*** Disk 100% Error Free
- 469% FASTER THAN SIMILAR PROGRAMS!
- Removes Bad Sectors • Adds 36th Track
- Performs Disk Drive Speed Check
- Adds DOS and More

only **$24.95***

— SPECIAL PACKAGE PRICE —
***NIBBLE NOTCH I* and DISK OPTIMIZER**
only **$29.95** for BOTH *

*On all orders add $2.00 for each item Postage & Handling ($5.00 each foreign P&H)
*Florida Residents Add 5% Sales Tax
SATISFACTION GUARANTEED OR YOUR MONEY BACK!

ORDER TODAY!

VISA* **Toll Free 1-800-642-2536**
Florida 305-493-8355
or send Check or Money Order to:
MasterCard

NIBBLE NOTCH® COMPUTER PRODUCTS
4211 NW 75th TERRACE • DEPT. 8 6 • LAUDERHILL, FL 33319

Inquiry 258

Peripheral Networking Now



Buy ASCI Intelligent Port Expanders

- Eliminate Manual Switching by Remote Control
- Improve Productivity and Reliability
- Share Printers, Modems or Plotters
- Expand Computers or Terminals
- Use Matrix Switching for Multiple Transmission or Security
- Supports Polling and Queing

INSTANT COMPATIBILITY with new computer devices and MAJOR OEM PRODUCTS:

Altos — Burroughs — Data General — DEC
H.P. — IBM — NCR — Northstar — Victor
and other key manufacturers.

Call **213-793-8979** to EXPAND YOUR SYSTEMS TODAY.

Advanced Systems Concepts Inc.
435 N. Lake Ave., Dept. B1
Pasadena, CA 91101
800-824-7080 Telex: 701 215

GIVE YOUR PC THE PRIVACY IT DESERVES

ENABLE YOUR PERSONAL COMPUTER TO PROTECT YOUR SENSITIVE RECORDS ELECTRONICALLY. THE TED 551 DES CRYPTO MODULE PLUGS INTO ANY PERIPHERAL EXPANSION BOARD.



ONLY $499

(PE) SYSTEMS, INC.
5520 Cherokee Avenue, Alexandria, VA 22312
(703) 642-9300 Telex 90-1860

Inquiry 274

EVENT QUEUE

PUBLIC X PARIS.
March 6–8

● **INDUSTRIAL AUTOMATION**—AUTOTECH Hong Kong '85, Hong Kong. An international conference on industrial automation held in conjunction with the First Exhibition on Automation Technology. The theme is "Micros in Affordable Automation—Creating New Industrial Opportunities for All." Contact Hong Kong Productivity Centre, 12th Floor, World Commerce Centre, Harbour City, 11 Canton Rd., Tsimshatsui, Kowloon, Hong Kong; tel: 3-7235656.
March 7–8

● **SUGI CONFERENCE**
The Tenth Annual SAS Users Group International (SUGI) Conference, Reno, NV. Topics include capacity planning and evaluation, systems software, education, graphics, information systems, and microcomputers. Contact SAS Institute Inc., SAS Circle, POB 8000, Cary, NC 27511, (919) 467-8000.
March 10–13

● **CONFERENCE ON SCIENCE**—ACM Computer Science Conference, Marriott Hotel, New Orleans, LA. This conference, sponsored by the Association for Computing Machinery and a number of college and university computer science departments, features an employment register, whereby job seekers can meet prospective employers. Contact ACM Computer Science Employment Register, Department of Computer Science, University of Pittsburgh, POB 13526, Pittsburgh, PA 15234.
March 11–14

● **DESIGN SHOW**
The 1985 National Design Engineering Show, McCormick Place, Chicago, IL. More than 600 CAD/CAM system and electronic component companies will exhibit products. Contact the Show Manager, National Design Engineering Show, 999 Summer St., Stamford, CT 06905, (203) 964-0000.
March 11–14

● **SCSI SEMINARS**
Small Computer Systems Interface (SCSI) Forum, Houston, TX. Seminars and exhibits of SCSI controllers and related peripherals. Contact Mr. J. Molina, SCSI Forum Ltd., POB 2625, Pomona, CA 91768-2625.
March 12

● **EDUCATIONAL CONFERENCE**—The 1985 Microcomputers in Education Conference, Arizona State University, Tempe. The theme is "Tomorrow's Technology." Emphasis will be placed on integrating computer technology and languages into the educational environment. Contact Donna Craighead, Payne B47, Arizona State University, College of Education, Tempe, AZ 85287, (602) 965-7363. *March* 13–15

● **SIMULATION IN SUNSHINE**—The Eighteenth Annual Simulation Symposium, Tampa, FL. A forum for interchange of ideas, techniques, and applications among those working in this field. Contact Alexander Kran, IBM Corp., East Fishkill Facility, Hopewell Junction, NY 12533.
March 13–15

● **COMPUTERS AND TELECOMMUNICATIONS**
COMTEL '85: International Computer and Telecommunications Conference, Infomart, Dallas, TX. Contact COMTEL '85, Suite 600, 13740 Midway Rd., Dallas, TX 75244, (214) 458-7011.
March 18–20

● **TECHNOLOGY AND EDUCATION**—The First An-

(continued)

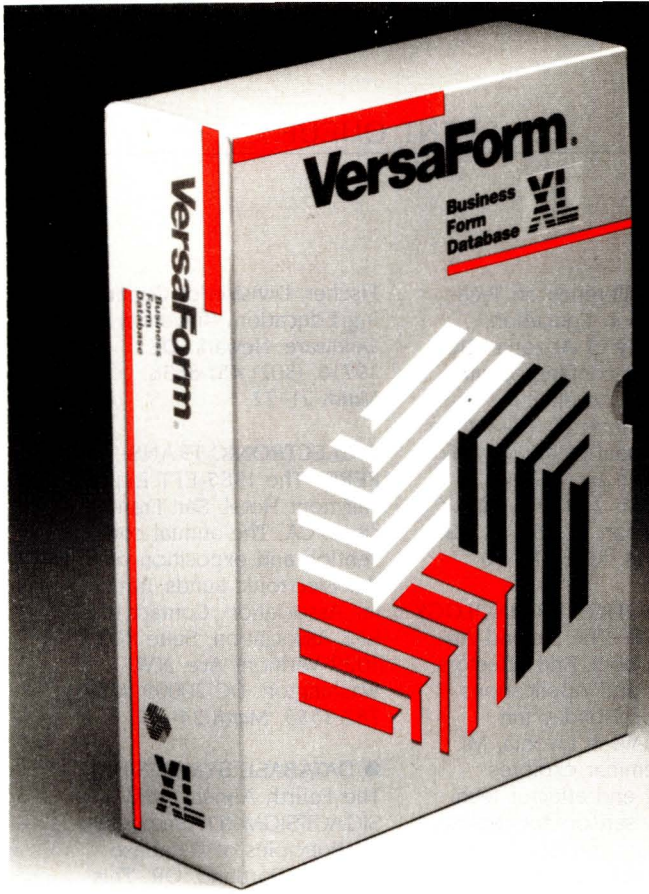

NEW
A powerful multifile database with a programming language for only $99

Versaform's new XL database isn't just promises—it's here now! And it offers—YES, FOR ONLY $99—all the features you'd expect in a database costing 4 times as much.

Accounting applications are XL's strength. Invoicing, purchasing, receivables, and shipping almost create themselves as you design the forms—and XL transfers data between them. There's an Invoicing, A/R and Inventory application—source code included—in the package that shows how it's done. The power's there. And unlike packaged accounting programs, you can do them YOUR way.

	VersaForm XL	dBASE III*	R-BASE 4000*
PRICE	99	695	495
STRUCTURED LANGUAGE	Y	Y	Y
MULTI-FILE	Y	Y	Y
COLUMNS WITHIN DATA RECORD	Y	N	N
DATA ENTRY CHECKING	BUILT-IN	MUST WRITE PROGRAM	BUILT-IN
ON-SCREEN CALC	BUILT-IN	MUST WRITE PROGRAM	MUST WRITE PROGRAM
FORMS OUTPUT	BUILT-IN	MUST WRITE PROGRAM	MUST WRITE PROGRAM
DATE ARITHMETIC	Y	N	N
DATA TYPES	DYNAMIC	FIXED	FIXED
COLUMN TOTAL OPERATOR	Y	N	N
QUERY BY EXAMPLE	Y	N	EXTRA
MAX FILE SIZE	4 MB	OPEN	OPEN
MAX RECORD SIZE	4000	4000	1530

*dBASE III is a registered trademark of Ashton-Tate. R:BASE 4000 is a trademark of Microrim, Inc.

- XL's structured language can access multiple files. 48 built-in functions give control of file access, printing, and user dialogues. You'll develop transaction-based applications with an ease you've never experienced before. And all at this unheard-of low price.
- VersaForm XL's unique form-oriented data structures let you easily set up forms and ledgers—even those with columns! Application development is FAST, FAST, FAST. And since forms are the way that businesses already store their data, the transition is smooth. That's why VersaForm XL is so easy to operate even for high-turnover clerical people—it starts from where they are now.
- Automatic data entry checking and on-screen calculation make transactions error-free. Stored print formats make output formatting a snap—you can quickly match existing paper forms. VersaForm XL's report generator is clear and intuitive. Designers can pre-install reports, users can set up their own.
- Query-by-forms (at no extra cost) lets users go right to the data they need. No query language to learn—forms are the natural language of business.

Ironclad Money-Back Guarantee

Try VersaForm XL for 30 days. If you're not fully satisfied, return it. We'll gladly refund your money.

Order now, and have the pleasure of using the right tool at the right price. You can't lose!

VersaForm XL runs on IBM PC, XT, AT and compatibles. Requires 192K, two 360KB drives, DOS 2.0 or later. Hard disk recommended.

Standard VersaForm (single file, no language) available for 64K, 2-drive Apple II or 128K IBM PC. $69.

VersaForm™ XL

Applied Software Technology 170 Knowles Drive, Los Gatos, CA 95030
(408) 370-2662

Yes! Rush me Versaform XL for the IBM PC ($99) ____
Standard Versaform (Single file, no language) for the IBM PC ($69) ____
Apple II (+,E,C) ($69) ____
Credit card members can order by phone. VISA MasterCard

Toll-Free: 1-800-538-8157 ext 880
In California
Toll-Free: 1-800-672-3470 ext 880

Enclose check or money order with coupon. Include $4.50 for U.S. Shipping and handling. $7.00 for C.O.D. California residents add 6.5% tax.
____ My check or money order is enclosed ____ Send C.O.D.
Charge my ____ MasterCard ____ Visa
Account No._____ Expires_____
PLEASE PRINT CLEARLY
Name _____
Address _____
City_____ State_____ Zip_____
Phone_____ Signature_____

Newword
Version 2
$249!

YOU GET A POWERFUL WORD PROCESSOR WITH THESE FEATURES

- Excellent Documentation—Tutorial, Reference Manual, Installation Guide (includes user area listing)
- Mergeprint—including conditionals (if, then, else)
- Displays underline, bold & inverse on the screen*
- Microjustified printing on dot matrix printers
- Column mode—with a new column replace command!
- Unerase—delete a line by accident? Unerase it!
- Embedded ruler lines—change margins automatically

"Newword seems to have everything that WordStar® + MailMerge® has—and more."
Computers & Electronics—June 1984

ORDER NOW!

AVAILABLE AT YOUR LOCAL DEALER, OR SEND CHECK OR MONEY ORDER TO:

Newstar Software Inc.
1601 Oak Park Blvd.
Pleasant Hill, CA 94523
(415) 932-2526

- send $249 for Newword
- $3.00 shipping & handling
- CA residents add sales tax
- VISA/MC accepted

NEWSTAR

Dealer & Distributor inquiries invited.
Substantial volume discounts for schools & businesses.
*only non-embedded attributes supported
WordStar, MailMerge registered trademarks of MicroPro

Medical and Dental Systems

- Appointment Scheduling
- Private Patient Billing
- Third Party Claim Form Preparation
- Medical Diagnostic Records
- Word Processing
- Continuous Financial History

IBM™ MAC™ WANG™
MS-DOS™ Lisa® apple®

CMA
MICRO COMPUTER DIVISION
55722 SANTA FE TRAIL
Yucca Valley, Ca. 92284
(619) 365-9718

EVENT QUEUE

nual Conference on Technologies in Education, University of Arizona, Tucson. This conference will focus on the effective implementation of research in educational technology. Contact Steve Louie, NACCIS, Suite 125, 2200 East River Rd., Tucson, AZ 85718, (602) 323-6144. *March* 18–20

● **ROBOTICS TECHNOLOGY UPDATE**—The Second Annual Robotic End Effectors: Design and Applications Seminar, Holiday Inn Livonia-West, Livonia, MI. This seminar explores robotic end effector techniques, sensors for tooling, compliant devices, interchangeable end-of-arm tooling devices, multihand tools, and magnets for tooling. More than 25 companies will exhibit. Contact John McEachran, Special Programs Department, Society of Manufacturing Engineers, One SME Dr., POB 930, Dearborn, MI 48121, (313) 271-1500, ext. 382. *March* 19–20

● **AI FOR ROBOTS** Aircon 2: The Second Annual International Conference on Artificial Intelligence for Robots, Stouffers Concourse in Crystal City, Arlington, VA. This conference is designed to promote a dialogue between experts and users of artificial-intelligence systems. The theme is "Toward Intelligent Robots: The Droids Are Coming." Contact Cindy Mega, IIT Research Institute, 10 West 35th St., Chicago, IL 60616, (312) 567-4024. *March* 21–22

● **ELEMENTARY COMPUTING**—University of Delaware Second National Conference: Computers and Young Children, University of Delaware, Newark. The emphasis is on programs for children 4 to 8 years old. Contact Dr. Richard B. Fischer, Division of Continuing Education, University of Delaware, Newark, DE 19716, (302) 451-8838. *March* 21–22

● **ELECTRONIC TRANSFERS**—The 1985 EFT Expo, Fairmont Hotel, San Francisco, CA. The annual convention and exposition of the Electronic Funds Transfer Association. Contact the EFT Association, Suite 800, 1029 Vermont Ave. NW, Washington, DC 20005, (202) 783-3555. *March* 24–27

● **DATABASE SYMPOSIUM** The Fourth Annual ACM SIGACT/SIGMOD Symposium on Principles of Database Systems, Portland, OR. This conference covers developments in the theoretical and practical aspects of database systems. Topics include the application of artificial-intelligence techniques to database systems, data models, and data structures for physical database implementation. Contact David Maier, Department of Computer Science, Oregon Grad Center, 19600 Northwest Walker Rd., Beaverton, OR 97006. *March* 25–27

● **OPTICAL STORAGE TECHNIQUES**—The Third Annual Conference on Optical Storage of Documents and Images, Shoreham Hotel, Washington, DC. For information, contact Technology Opportunity Conference, POB 14817, San Francisco, CA 94114-0817, (415) 626-1133. *March* 25–27

● **WEST COAST FAIRE** The Tenth Annual West Coast Faire, Moscone Center, San Francisco, CA. This is one of the largest computer shows. Contact Computer Faire Inc., Suite 201, 181 Wells Ave., Newton Falls, MA 02159, (800) 826-2680; in Massachusetts, (617) 965-8350. *March* 30–*April* 2 ■



10 Reasons Why We're #1 for

Sanyo 555-2's

With each Sanyo 550-2 and 555-2 we include -at no additional charge- (1) Sketch-A basic color graphics drawing program (2) 15 Games for the Sanyo-A $29.95 package (3) Datemate - An appointment program with a perpetual calendar (4) Diagnostics-Tests your RAM, display and keyboard (5) P.C. Filer - The program that made Freeware famous (6) 3 Extra Utilities that don't come on the systems disk (7) I.S. Manager - Allows you to change the structure of existing InfoStar records (like dBASE II.)

Plus if you buy from Scottsdale Systems (8) you can choose between Micropro and IUS software on the two drive systems, and (9) we stock software reference manuals for our customers, and (10) we offer factory-trained service.

Yes we have great prices on all our Sanyo's but we give you much more -and that's why we've sold more Sanyo computers than any other dealer in America.



The Silver Fox™

Compare the Silver Fox to any other system from any other dealer:

Standard Hardware: 8088 CPU, dual floppys with 1.6 Megabytes of formatted storage, 256K RAM, Keyboard, Video, Graphics, printer port, and a 12" green phosphor monitor.

Free Silverware: MS-DOS, HAGEN-DOS, M-Disk, WordStar, Easy Writer, DataStar, ReportStar, IS Manager, FILEBASE, Calcstar, Color Graphics Basic, Mailmerge, SpellStar, and a bonus disk with games, graphics, and utilities. Plus you get compatibility with over 200 additional applications programs.

Give us a call for a free brochure, we'll explain how we can sell you so much for only

$1398

Closeout - While they last



Sanyo MBC 1100 computers with two built-in 360k drives, 12" green phosphor monitor, 80 column/25 line display, plus over $2000 of the best-selling Micropro software including WordStar, CalcStar, MailMerge, SpellStar, ReportStar, DataStar, CP/M and BASIC. Not a souped up Commodore or a portable with unknown software - but a powerful combination of hardware and software for business use, while they last.

$888

New! 256K Columbia's

Ask about our Open Access Package



What are you looking for in a compatible system? If maximum compatibility, minimum prices, $3000 worth of software reliability and nationwide service are on your checklist you should consider buying a Columbia computer from Scottsdale Systems. Each system includes a software pack with MS-DOS 2.1, Basica 2.0, Perfect Writer, Perfect Calc, Perfect Speller, Perfect Filer, Fast Graphs, Home Accountant Plus, Space Commanders, ATI tutorials, and T.I.M. IV data base manager. Prices include video card and keyboard. Your choice 1600-1V Plus or VP Plus (both w/256k).

1600-4V Plus $3099
Professionals from $3795

$1899

Altos Systems . . . big discounts, local installation

TERMINALS



ADDS Viewpoint $439
Wyse 50 $499

Also great prices on other Wyse and ADDS terminals-plus Televideo, Qume and Zenith.

PLOTTERS

HI DMP-29 $1795
HI DMP-40 $745
HI DMP-41 $2340

MODEMS

Password $308
Mark XII $249

Compatible Drives Teac Slimline

FD54A (160K) $79
FD55B (360K) $139
FD55F (720K) $159

Scottsdale Systems Ltd.

617 N. Scottsdale Road, Suite B, Scottsdale, Arizona 85257

VISA (602) 941-5856 MasterCard

Call 8-5 Mon.-Fri.

We participate in arbitration for business and customers through the Better Business Bureau of Maricopa County.

SINCE 1980

TELEMARKETING ONLY. If you plan to visit please call first for an appointment. Prices listed are for cash and include a 3% discount. We sell on a Net 30 basis to Fortune 1200 companies and universities. No C.O.D.'s or A.P.O.'s. P.O.'s add 2%. Visa, Mastercard add 3%. Az. residents add 6%. Prices subject to change, product subject to availability. Personal/company checks take 3 weeks to clear. All items listed are new with manufacturers warranty. 0-20% restocking fee for returned merchandise. Shipping extra-products are F.O.B. point of shipment. Software is not warrantied for suitability. Registered trademarks: Televideo-Televideo Systems, Inc.; Silver Fox™ HAGEN-DOS-Scottsdale Systems, Ltd.; Commuter-Visual Computer Incorporated.

PRINTERS



EpsonFX-80	~~$569~~	$180 off
Tally Spirit 80		$254
Okidata 92	~~$399~~	$125 off
Okidata 93	~~$799~~	$210 Off
Okidata 84		Call
Dataproducts 8050 "loaded"		$1344
Tally 160L		$589
Panasonic 1091		$298
Toshiba 1351		$1269

LETTER QUALITY

Juki 6100	$408
Juki 6300	$767
Silver Reed 400	$259
Silver Reed 500	$319
Silver Reed 550	$409
Silver Reed 770	$799
NEC's	Call
Daisywriter 2000	$824

DIABLO LQ SALE

Diablo 630 API $1499
Diablo 620 $715



STAR MICRONICS SALE

Gemini 10X $244
Power Type $299
Radix 15 $589



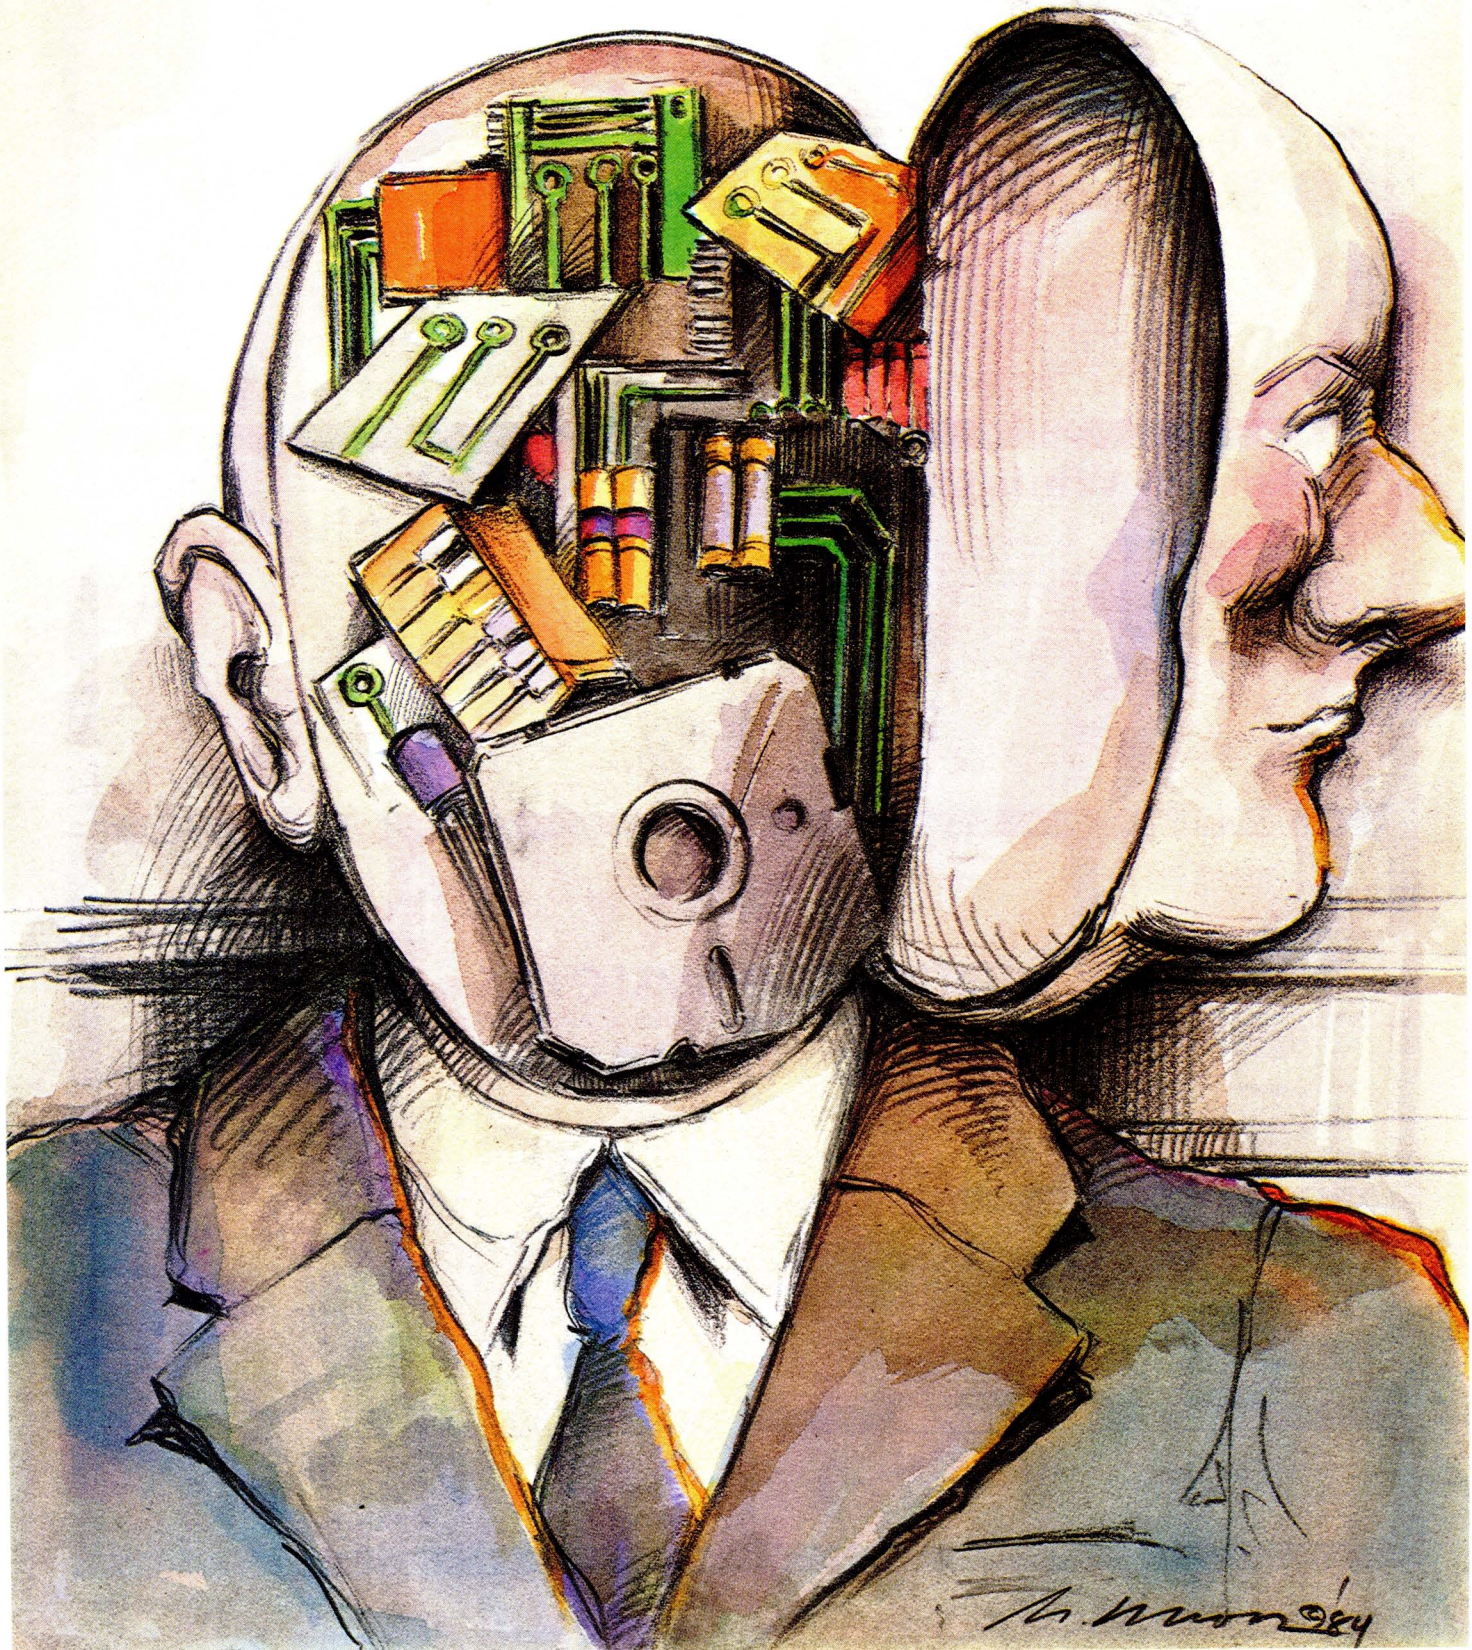

Features

CIARCIA'S CIRCUIT CELLAR: UNDERSTANDING LINEAR POWER SUPPLIES
by Steve Ciarcia **98**

THE VISUAL MIND AND THE MACINTOSH
by Bill Benzon **113**

A GLIMPSE INTO FUTURE TELEVISION
by Joseph S. Nadan **135**

MICROSOFT MACINTOSH BASIC VERSION 2.0
by Gregg Williams **155**

THE APPLE STORY, PART 2: MORE HISTORY AND THE APPLE III
conducted by Gregg Williams and Rob Moore **167**

UNINTERRUPTIBLE POWER SUPPLIES
by William Rynone **183**

AN INTRODUCTION TO FIBER OPTICS, PART 2: CONNECTIONS AND NETWORKS
by Richard S. Shuford **197**

ALGORITHMS FOR A VARIABLE-PRECISION CALCULATOR
by Paul A. Nilson **211**

AUDIO-FREQUENCY ANALYZER
by Vince Banes **223**

FONT DESIGN FOR PERSONAL WORKSTATIONS
by Charles Bigelow **255**

EXPERT SYSTEMS—MYTH OR REALITY?
by Bruce D'Ambrosio **275**

THE JANUARY ISSUE OF BYTE begins what we hope is another banner year for microcomputer enthusiasts. Artist Robert Tinney has restarted the personal computing hourglass, depicting the inevitable flow of new products and technology that will appear in 1985.

This month we offer an exceptional number and variety of feature articles. As in past January issues, we do not have a theme section; we take this opportunity to publish twice the number of features. We'll return to our normal theme format in February with a section dedicated to computing in the sciences.

To start this month, Steve Ciarcia focuses on an analog topic: power supplies and their attendant problems. If you've wanted a robust 12- to 13.2-V, 15-A power supply made from readily available components, check out Ciarcia's Circuit Cellar.

The pictures-versus-words user-interface debate is likely to continue for some time, but Bill Benzon provides a strong argument for the Macintosh as a tool for the visual brain in "The Visual Mind and the Macintosh."

Speaking of the Macintosh, Gregg Williams, senior technical editor, describes the content and structure of Microsoft's latest version of BASIC for the Mac in "Microsoft Macintosh BASIC Version 2.0." And along with Rob Moore, Gregg continues part 2 of "The Apple Story," which began in the December supplement, *BYTE Guide to Apple* PCs. Also continued from December is part 2 of "An Introduction to Fiber Optics" by Richard Shuford, BYTE's special-projects editor. Richard discusses connections and networks of optical-fiber waveguides.

If you've ever tried "computing in the dark," you'll find William Rynone's "Uninterruptible Power Supplies" enlightening. While not intended to be comprehensive, his article provides a comparison among some commercial units, a do-it-yourself project, and some shopping tips.

New developments in VLSI enable Joseph Nadan to give "A Glimpse into Future Television" and describe how this technology is evolving in parallel with personal computers to bring television into the "information age."

If you do decimal computations on large numbers, read "Algorithms for a Variable-Precision Calculator" by Paul Nilson. He uses a pseudocode to explain the logic in his arithmetic algorithms.

If you have an IBM PC and are interested in charting the frequency response of your lease-breaker stereo system, read Vince Banes's "Audio-Frequency Analyzer" construction article.

A difficult-to-read display based on coarse-resolution dot-matrix letters may be a thing of the past, as described in "Font Design for Personal Workstations" by Charles Bigelow.

In Bruce D'Ambrosio's "Expert Systems—Myth or Reality?" he touches on some of the capabilities and limitations of expert systems and the directions in which researchers are heading.

We've quite a variety of topics in January, and we look forward to a variety of editorial topics and themes in the remainder of 1985.

—Gene Smarte, Managing Editor

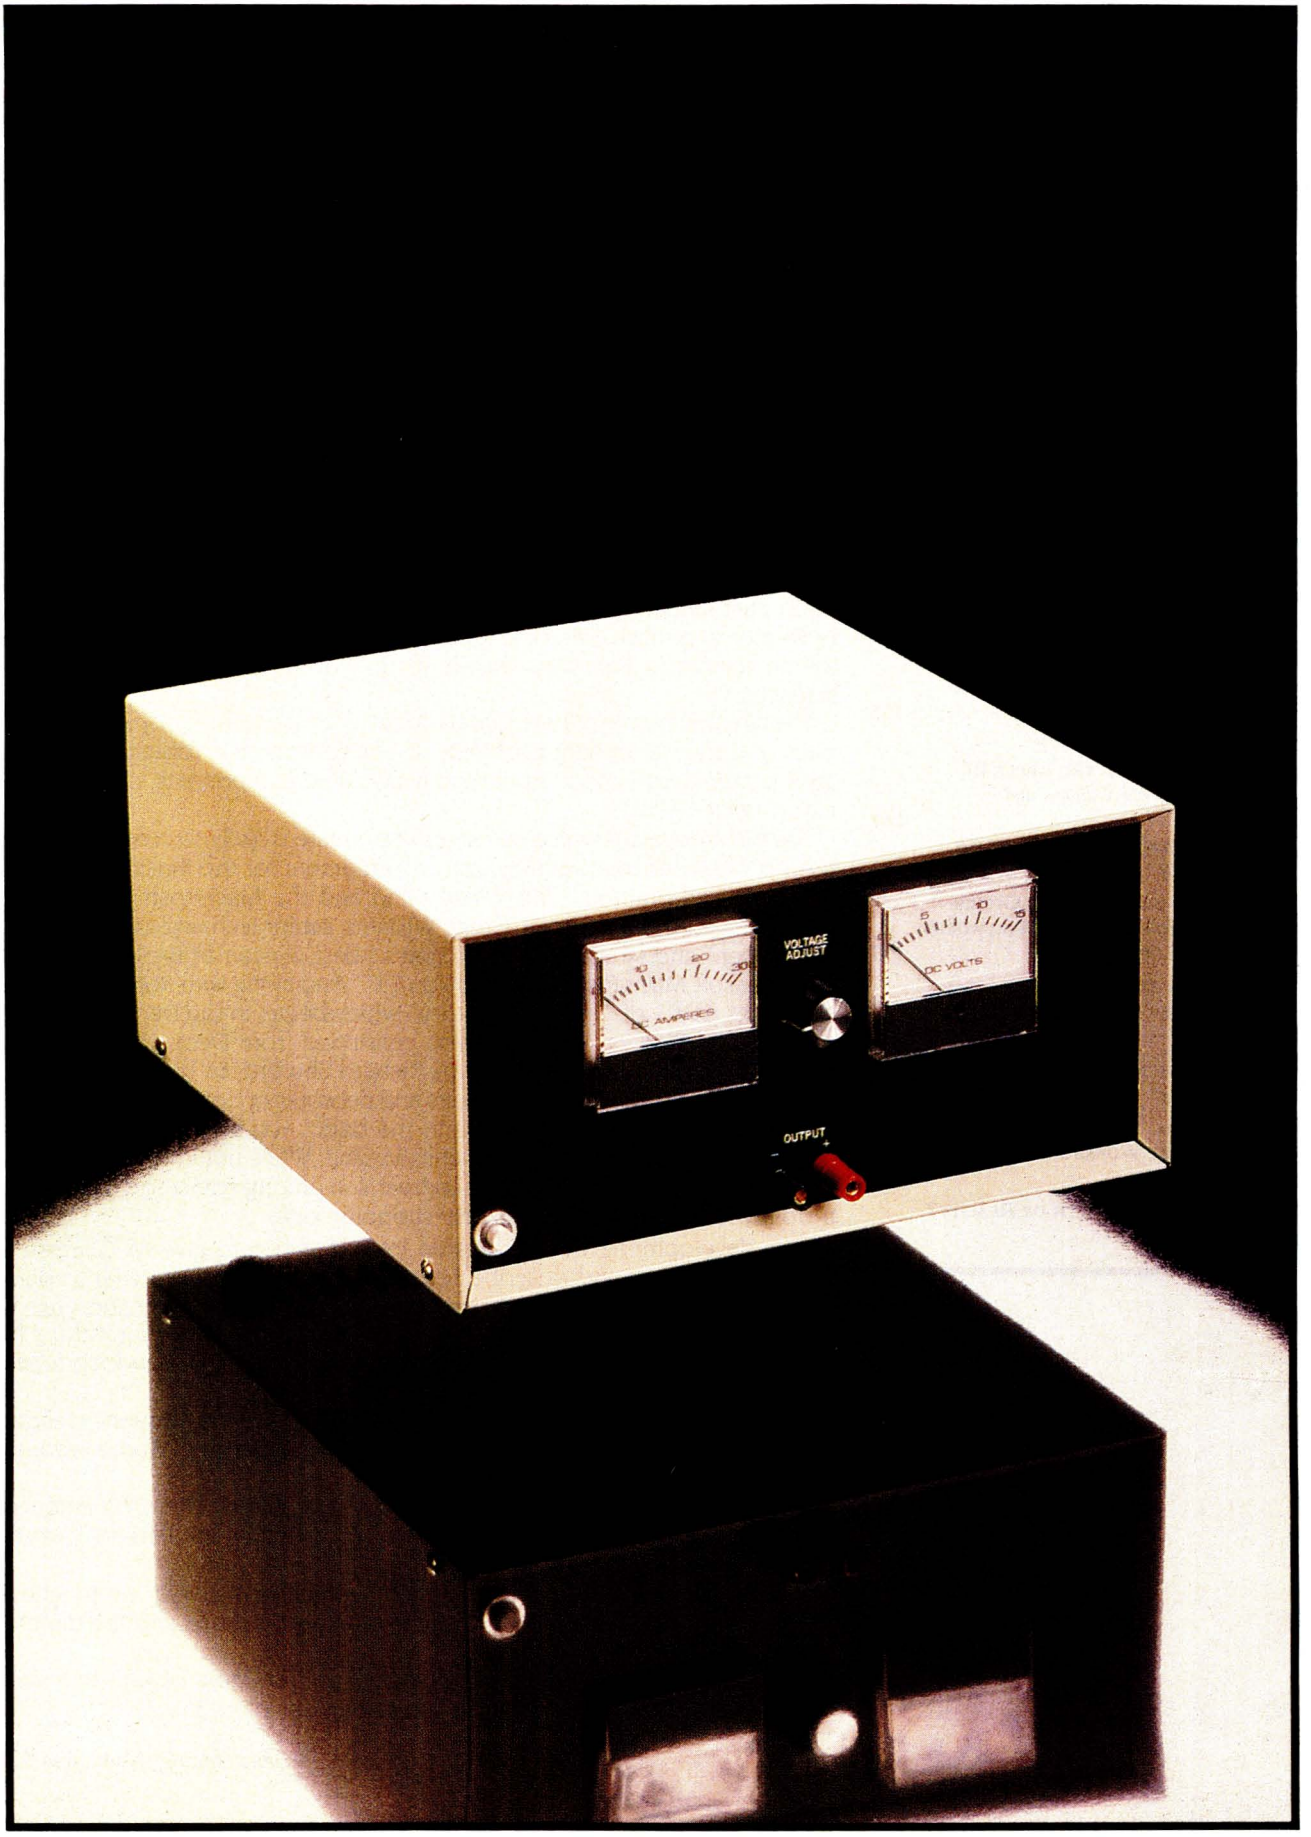

PHOTOGRAPHED BY PAUL AVIS

UNDERSTANDING LINEAR POWER SUPPLIES

BY STEVE CIARCIA

Proper design brings simplicity and reliability

Sometimes it is the more trivial aspects of electronics that create the greatest problems. With all the concern about 16-bit versus 32-bit processors and multitasking operating systems, who would think that a simple linear power supply could cause the demise of a company? Even with a board of directors full of venture capitalists, it's often too late when they look beyond their spreadsheet projections and ask whether the product they are financing actually works.

While looking over someone's shoulder is not my favorite consulting activity, I recently was involved in such a situation. One of the founders of a venture-capital-funded company was getting very nervous because his engineering department was seriously overdue on two products. Since his responsibility was sales, and about $800,000 in pending orders was riding on cost-effective delivery of these products, it was no wonder that he was concerned. One of the products was way over budget, and the other seemed to have a "heat problem." My job was to determine if there was a problem and help rectify it if possible.

The first product was a speech synthesizer that attached to a parallel printer port. Its problem was "engineering buzzword injection phenomenon." Inexperienced engineers try to impress management by designing microprocessors into products that don't need them.

The synthesizer chip required parallel data and a strobe. It signified that it needed more data with a single ready line. Instead of merely attaching the chip directly to the printer port and pretending it was a printer (attaching printer busy to the ready line), the engineer had added a mask-programmed microprocessor, external character-buffer memory ("In case the programmer wanted it," he said.), external program memory (in case the mask-programmed chips didn't arrive in time and they had to use EPROMs [erasable programmable read-only memories]), and a parallel port for the synthesizer chip. Direct connection to the printer port (without the microprocessor) afforded a 75 percent cost reduction.

The second product, which I'll call E, was a stand-alone speech-and-music synthesizer board that communicated serially with the host computer. To make a long story short, I was called in to look at E after 5000 sets of

(continued)

Steve Ciarcia (pronounced "see-ARE-see-ah") is an electronics engineer and computer consultant with experience in process control, digital design, nuclear instrumentation, and product development. He is the author of several books about electronics. You can write to him at POB 582, *Glastonbury,* CT 06033.

COPYRIGHT © 1985 STEVEN A. CIARCIA. ALL RIGHTS RESERVED.

components and printed-circuit boards had been purchased but nothing had been shipped. It was now four months overdue.

I agreed on the basic design method. Because of the data in serial format and multiple peripheral chips, this device did require a microprocessor. Unfortunately, it suffered from another common ailment among inexperienced designers: "three-terminal-regulator narcosis." This occurs when you read the manufacturer's spec sheets on a three-terminal regulator and use the information without understanding it or the other elements in the power supply.

My first experience with the E product almost burned my nose. I leaned over an operating prototype to make a closer inspection and sensed intense heat rising from the power-supply section. According to the designer, everything was within the manufacturer's specifications. The board needed +12 and +5 volts (V) at 0.5 ampere (A), which was regulated down from an 18-V (plus 10 percent ripple) rectifier output. The 90° Celsius (C) case temperature was "warm," but the engineer hotly contested that everything was okay. When further queried about added heat once the unit was enclosed, he assured me that it still wouldn't exceed the manufacturer's specified limit of 150°C (apparently he didn't know the difference between junction and case temperature).

I come from the school of design that says, "If you can't touch it, you've got big problems." Eventually, my greatest fears were realized. E boards were installed in ABS (acrylonitrile-butadiene-styrene) thermoformed plastic cases and allowed to burn in (aptly named) overnight. When inspected in the morning, the tops of many cases had melted and deformed. In addition, many of the regulators had failed and were now inoperable. At this point, the bad design could not be hidden from the venture capitalists. Even marketing concurred, "We can't ship an incendiary device to every kid with a computer!"

Linear Power Supplies

Virtually all electronic equipment operates on a DC power supply. This DC voltage can come from a battery or can be converted from an energy source such as the AC power line. The two commonly used conversion methods are switching and linear.

The advent of easy-to-use three-terminal regulators has given designers a false sense of security. Because of the wide operating limits and built-in protection of many of these monolithic regulators, brute force and a rule-of-thumb design technique can still result in functional power supplies. It takes resourceful and knowledgeable designers who understand the interrelationships of power-supply components to produce efficient and cost-effective products. In the case of E, larger heatsinks or lower input voltages would have offered some after-the-fact relief. Some better understanding of linear power supplies and a bit of initial computation would have resulted in a shippable design in the first place, however.

My Circuit Cellar projects range from the esoteric to the instructive. I do, however, presume that the builders of these projects have a certain level of basic understanding and that many hours of construction won't go up in smoke because of a poorly designed power supply. This recent experience has made me hesitate to be quite so presumptuous, and I will now add linear power supplies to my periodic tutorial subject list (with speech synthesis, home control, etc.).

This month I'll go back to basics and analyze the construction of linear power supplies. I'll describe transformer selection, input-filter design, regulator selection and connection, heatsinking, and layout. I will particularly emphasize the filter, heatsinking, and layout. Most articles seem to

CONFIGURATION	CIRCUIT	V_{IN}	$V_{O(PEAK)}$	AVERAGE V_O DC	PEAK INVERSE VOLTAGE PER DIODE	FUNDAMENTAL OUTPUT RIPPLE FREQUENCY 60Hz	OUTPUT WAVEFORM
	SINGLE-PHASE HALF WAVE	V_{RMS}	$1.41V_{RMS}$	$\frac{1}{\pi}V_{O(PEAK)}=0.45V_{RMS}$	$1.41V_{RMS}$	$1F_L$	
	SINGLE-PHASE CENTER-TAP FULL WAVE	V_{RMS}	1.41_{RMS}	$\frac{2}{\pi}V_{O(PEAK)}=0.90V_{RMS}$	2.82_{RMS}	$2F_L$	
	SINGLE-PHASE BRIDGE FULL WAVE	V_{RMS}	$1.41V_{RMS}$	$\frac{2}{\pi}V_{O(PEAK)}=0.90V_{RMS}$	$1.41V_{RMS}$	$2F_L$	

Figure 1: *Three single-phase transformer-rectifier configurations.*

overlook these items while they discuss various regulator configurations. If, after building a supply from such a slanted article, the end product is in thermal shutdown most of the time because of naive filter design, you are better off reading comic books. I believe that the construction of power supplies isn't difficult, but perhaps no one has ever described how to do it. Hopefully, the process will become easy after reading this article.

Starting with the Basics

Generally speaking, a basic single-phase linear power supply consists of little more than a transformer, rectifier, and filter. Where it is necessary to accurately maintain the output potential, a voltage-regulator circuit is added. More precisely, the four components function as follows:

1. A *transformer* isolates the supply from the power line and reduces the input voltage (120 or 220 V AC) into usable low-voltage AC.
2. A *rectifier* converts the AC to a DC waveform and satisfies the charging-current demands of the filter capacitor.
3. A *filter* capacitor maintains a sufficient voltage level between charging cycles to satisfy the minimum voltage requirements of either the load directly or a voltage regulator attached to the load.
4. A *regulator* maintains a specific output voltage over various combinations of input voltage and load.

The three basic forms of single-phase transformer-filter circuits are half-wave, full-wave bridge, and full-wave center-tap. The terms "half-wave" and "full-wave" refer to the AC-input waveform. In a half-wave circuit, only half of the 360-degree input voltage is applied to the load. In a full-wave circuit, the full 360 degrees is usable. Figure 1 shows their configurations and relationships.

The first consideration to be made in the transformer choice is the type of circuit configuration: full-wave center-tap or full-wave bridge. The half-wave rectifier is generally used only for low-current or high-frequency applications since it requires twice the filter capacitance to maintain the same ripple as a full-wave rectifier.

Both the center-tap and bridge configurations have their own merits. The center-tap circuit dissipates less power, requires less space, and is potentially more economical than the bridge because it uses only two (as opposed to four) rectifier diodes. Using only two diodes, it has a lower impedance than a bridge circuit. However, for the same DC output voltage, the diodes must have twice the PIV (peak inverse voltage) rating. And since diodes are inexpensive, there is less real economy in using center-tap transformers. Their selection often results more from finding available transformers with the proper secondary voltages for a particular application.

A 120-V AC RMS (root mean square) sine wave is applied to the primary winding of the transformer. A similar lower-voltage waveform is produced at the secondary windings. This AC output voltage is then applied to a full-wave bridge rectifier of the form described in figure 1.

Since we are dealing with actual components and not theoretical examples, it is important to note that different output voltages will be produced from bridge and center-tap circuits, even though they may start with the same secondary potential. If you observe a full-wave rectifier output on an oscilloscope, you will note a period of nonconduction at every zero crossing. Real diodes have an intrinsic voltage drop across them and dissipate power. For most low-current applications, this threshold voltage is about 0.6 V. At 5 A or more it is closer to 1.1 V.

Depending upon the configuration, one or two diode drops may be between the transformer and the filter capacitor. (Figure 2 shows the current flow through a bridge rectifier.) The voltage regulator requires a certain minimum DC input level to maintain a constant output voltage. Should the applied voltage drop below this point, output stability can be severely de-

(continued)

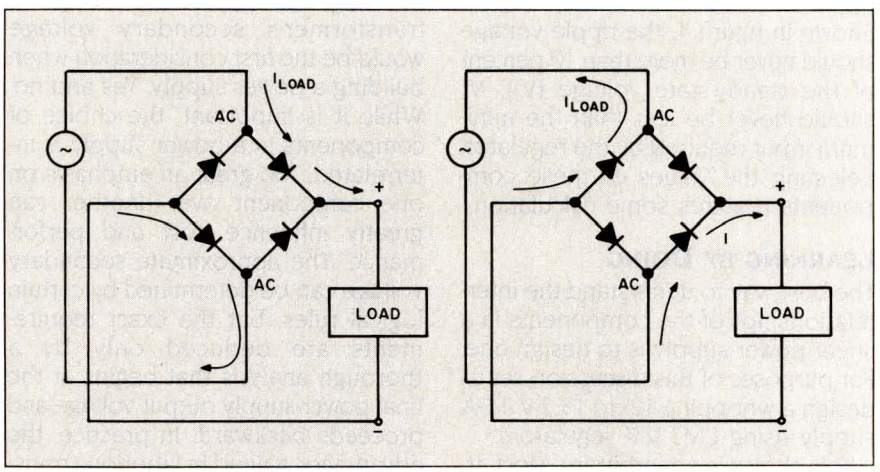

Figure 2: *The current flow through a full-wave bridge. Two diodes are conducting current at any one time. They present a voltage drop of 1 V each.*

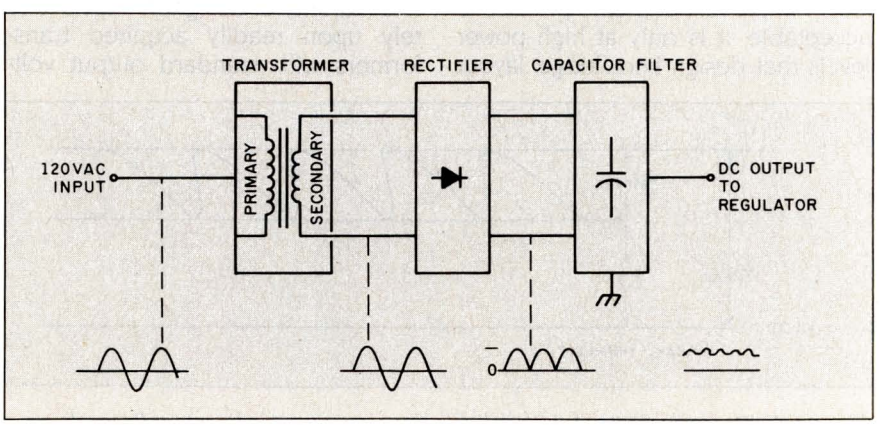

Figure 3: *The block diagram of a filtered power supply.*

graded. Where efficient low-dissipation designs are involved, these diode drops can be significant. In full-wave bridge designs, two diodes are in series at all times. The 2.2-V loss through the bridge is an important consideration that should be reflected in the calculations.

To smooth the rectifier output and help maintain a minimum input level to the voltage regulator, a filter capacitor is used (see figure 3). When the diodes are conducting, the capacitor stores enough energy to maintain the minimum voltage until the next charging cycle. With a 60-Hz transformer and a full-wave rectifier, the charging cycle has a frequency of 120 Hz. The capacitor must charge up in 8.3 milliseconds (ms) and maintain a sufficient level until the next charging cycle, 8.3 ms later.

The peak-to-peak magnitude of this periodic charge/discharge cycle is called the ripple voltage (V_{ripple}). The highest level of voltage including the ripple is called peak voltage (V_{peak}). Shown in figure 4, the ripple voltage should never be more than 10 percent of the steady-state voltage (V_c); V_c should never be less than the minimum input required by the regulator. Selecting the values of these components requires some calculation.

Learning by Doing

The best way to understand the interrelationships of the components in a linear power supply is to design one. For purposes of this discussion, let us design a whopping 12- to 13.2-V 15-A supply using LM338K regulators.

This choice is not arbitrary. Most articles on linear power supplies present low-current circuits that are relatively idiot-proof. At such low currents, simple rule-of-thumb practice is acceptable. It is only at high power levels that design knowledge, layout principles, and proper component selection are mandatory. Somewhere in between the 5-watt (W) bench supply you build from an article for hobbyists and the 198-W supply we will discuss is a gray area where experimenters who rely on luck and rule of thumb will be out of one or both.

I am presenting such a big supply for another reason. For quite some time I've been receiving letters regarding uninterruptible power supplies. While I can't guarantee that I can design one that is more cost-effective than a commercial unit, I intend to investigate the options. To aid in this task, I need a high-current DC supply for the initial experiments. Rather than dragging in car batteries (a "12-V" car battery actually produces 13.2 V) and chargers, I thought I'd build a high-current supply that demonstrates something for this project and can be put to good use later.

198 Watts!

You might think that specifying the transformer's secondary voltage would be the first consideration when building a power supply. Yes and no. While it is important, the choice of components in a power supply is interrelated. Too great an emphasis on one component over another can greatly influence cost and performance. The approximate secondary voltage can be determined by certain logical rules, but the exact requirements are deduced only by a thorough analysis that begins at the final power-supply output voltage and proceeds backward. In practice, the advantages gained in laborious transformer calculations are of benefit only to those designers capable of specifying custom-wound transformers. The majority of designers will have to rely upon readily acquired transformers with standard output voltages. For greatest efficiency, the standard voltage should be as close to the calculated value as possible.

Given an understanding of the basic filter components at this stage, we can proceed to the case at hand: a 13.2-V 15-A supply. The regulator, which I'll discuss later, uses the LM338K chip. These units are variable-voltage output devices, in contrast to fixed-voltage output devices such as the LM340T-5 (5 V) or 7812 (12 V). For them to properly operate over a temperature from 0 to 70°C, the input voltage to the LM338K must be 3 V greater than the output set point. (Fixed-voltage output regulators by contrast can suffice with a 2- to 2.5-V difference.) To be on the safe side, I always plan a minimum of 3.5 V. If this I/O (input/output) differential is less than 3 V, regulation becomes unstable. For a 13.2-V output, therefore, V_c has to be at least 16.7 V. For a 5-V output, V_c should be 8.5 V minimum. (Too much input voltage creates a different problem. Any $V_{out}-V_{in}$ difference greater than 3 V simply generates heat and should also be avoided.)

Whatever the magnitude of V_{peak} and V_{ripple}, V_c must not drop below 16.7 V or the regulator may not work. If this supply, which operates at 115-V AC input, is to still function at 105 V AC, we must make sure that V_c is 16.7 V at 105 V AC. The 8.5 percent voltage rise to 115 V AC, however, will make V_c 18.2 V (and 20.5 V at 130 V AC). Going much above these values, while still satisfying the input criteria, will increase power dissipation substantially.

Thus far, we have calculated or assumed the following at 25°C and 115-V AC input:

V_c = regulator input voltage at 115 V AC = 18.2 V
V_{ripple} = 10 percent of V_c maximum = 1.8 V
$V_{peak} = V_c + V_{ripple}$ = 20 V
I_{out} = output current = 15 A
V_{rect} = voltage drop across diode bridge = 2.2 V (two diodes)

Choosing the Transformer

We have determined the voltage drops across the various components and the minimum regulator input voltage. These values can be used to calculate the required RMS secondary output voltage as follows:

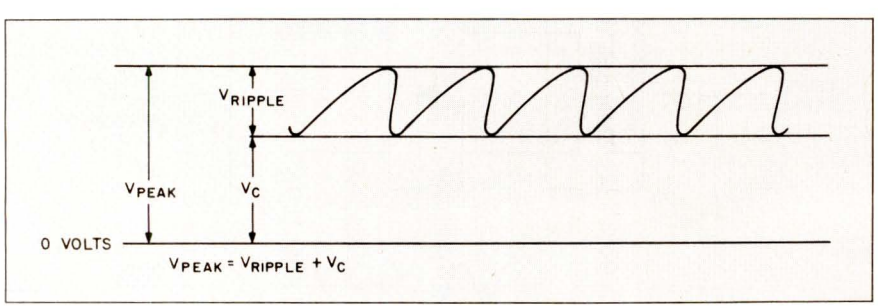

Figure 4: *The components of peak voltage, V_{peak}, are the steady-state voltage, V_C, and the ripple voltage, V_{ripple}.*

$$V_{sec,rms} = \frac{V_c + V_{ripple} + V_{rect}}{\sqrt{2}}$$

$$= \frac{18.2 + 1.8 + 2.2}{1.414}$$

$$= 15.70 \text{ V AC}$$

In practice, 15-A 15.70-V transformers aren't available off the shelf, but many 15- and 18-V units are available. While 16 V is the proper transformer secondary-winding selection, 15- and 18-V 10-A transformers will work fine if you can live with 10 A rather than 15 A. (One of these is part number F-62U from Triad-Utrad, 1124 East Franklin St., POB 1147, Huntington, IN 46750.) The 15-V unit will not give complete operation to 105 V AC, however, and the 18-V transformer will increase power dissipation in the regulator by 12.5 percent. (I don't recommend using 25.2-V center-tap transformers.)

I don't like presenting an optimized design and then apologizing for not taking my own advice. The calculations might seem a bit rigged when you find that I just happened to use a 16-V 15-A transformer to complete this project. I have to confess that I had it custom wound to meet the application. While I don't expect the average experimenter to resort to such expensive tactics, when I build a piece of test equipment, I want reliable and consistent operation. The final transformer secondary winding is 16 V AC at 15 A, and the secondary resistance is 0.04 ohm. (A 2-A 18-V center-tap transformer such as the Radio Shack 273-1515A by contrast is about 0.6 ohm.) With the additional wiring and connections between the transformer and the bridge, the source resistance is about 0.1 ohm.

Using a 16-V transformer, the true, as opposed to calculated, voltage levels are

V_{sec} = 16 V AC
V_{rect} = 2.2 V
$V_{peak} = (V_{sec} \times 1.414) - V_{rect}$ = 20.4 V
V_c = 18.6 V
V_{ripple} = 1.8 V
R_s = transformer secondary resistance and resistance of connecting wires = 0.1 ohm

Sizing the Filter Capacitor

When the supply is turned on, a 120-Hz rectifier output is applied to the capacitor. The capacitor is large enough so that it can supply the full load current with only a negligible drop. If the capacitor is very near peak when the next charging cycle occurs, as would be the case with light loads and large capacitors, the diodes conduct for a very short time. The exact time during which the capacitor supplies current is fixed by the permissible peak-to-peak ripple voltage. This time:

$$T_{conduction} = (\theta/180)\ (8.33) \text{ ms}$$

where $\theta = |90 + \arcsin(V_c/V_{peak})|$ degrees.

For ripple voltages equivalent to 10 percent of V_{peak}, the filter-capacitor conduction time is 7.14 ms rather than 8.33 ms. For simplicity, however, it is often assumed that the capacitor must carry current for the full half cycle and 8.33 ms is used in the calculations. The capacitor value is chosen as follows:

$$C = (T_c/V_{ripple})\ I$$

where C = capacitance in farads (F) = ?, I = continuous output current = 15 A, T_c = charging time of capacitor = 8.33 ms, and V_{ripple} = allowable ripple voltage = 1.8 V. Plugging in the values:

$$C = \frac{(15)\ (0.00833)}{(1.8)}$$

$$= 0.069417 \text{ F}$$

or

$$= 69{,}000 \text{ microfarads } (\mu F)$$

In the nearest commercial value, C = 75,000 μF at 25 V. Generally available commercial electrolytic capacitors have a tolerance of +50 percent and −10 percent. I chose to use a General Electric 86F543 75,000-μF 25-V (V_{peak} is 20 V) unit, but any capacitor of similar size will work. The ripple-current rating on capacitors of this size is also adequate.

Choosing the Bridge Rectifier

The four considerations when choosing a bridge rectifier are surge current, continuous current, PIV rating, and power dissipation. These parameters are generally ignored in rule-of-thumb designs because the 3- and 10-A diode bridges (which are generally available, coincidentally) have ratings

When I build a piece of test equipment, I want reliable and consistent operation.

that protect against bad designs. With 15-A power supplies, however, we should take nothing for granted. These specifications are not inconsequential and must be considered.

When a power supply is first turned on, the filter is totally discharged and for an instant appears as a dead short to the diode bridge. In this condition, the only thing that limits the current flowing through the bridge is the resistance in the secondary windings and the connecting wires. This sudden inrush is called surge current and is computed as follows:

$$I_{surge} = \frac{V_{peak}}{R_s}$$

$$= \frac{20.4}{0.1}$$

$$= 204 \text{ A}$$

The time constant of the capacitor is

$$\tau = (Rs)\ (C)$$

$$= (0.1)\ (0.075000)$$

$$= 7.5 \text{ ms}$$

Generally speaking, power surges will not damage the bridge if the surge is less than its surge-current rating and if the time constant, τ, is less than 8.33 ms, which it is. A readily available bridge rectifier that fits the bill is the Motorola MDA990-2, which is rated at 30 A continuous and 300 A surge. Its PIV rating is 100 V, which is significantly in excess of our 22.6-V secondary peak.

One final consideration on the bridge is power dissipation. Since diodes exhibit voltage drops when current flows through them, they dissipate power just as the regulators do. The rule of thumb says that if I_{out} is 15 A and V_{rect} is 2.2 V, power dissipation (PD) is 33 W. Such a high value would suggest the need for a heatsink.

A possibility exists, however, that

(continued)

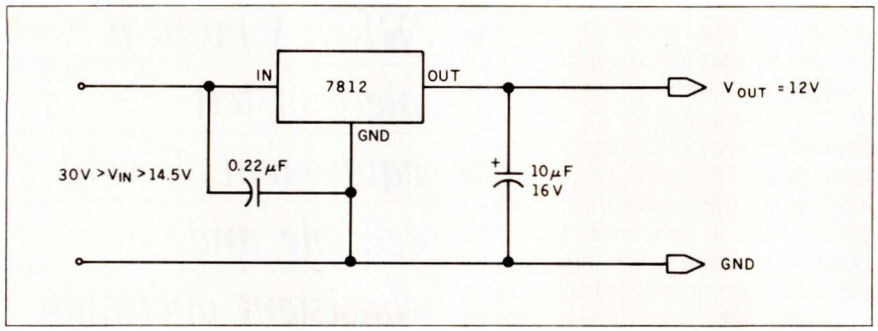

Figure 5: A *typical +12-V fixed-voltage output regulator.*

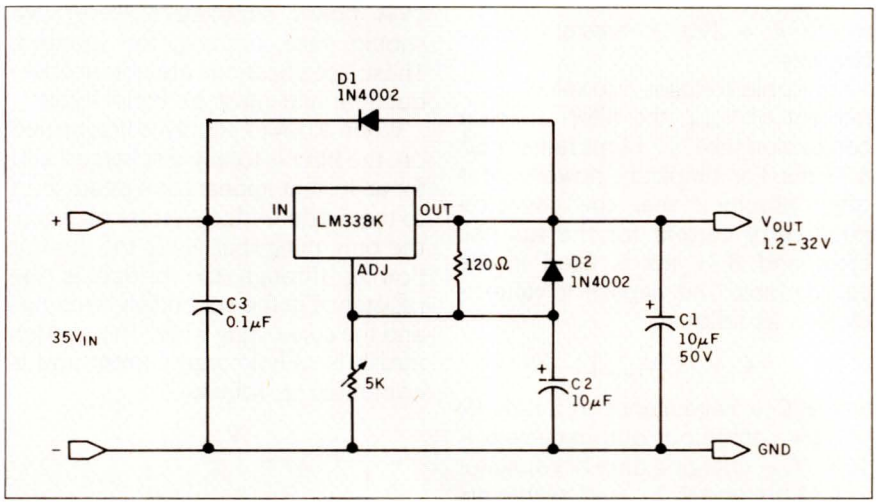

Figure 6: A *typical variable-voltage three-terminal regulator.*

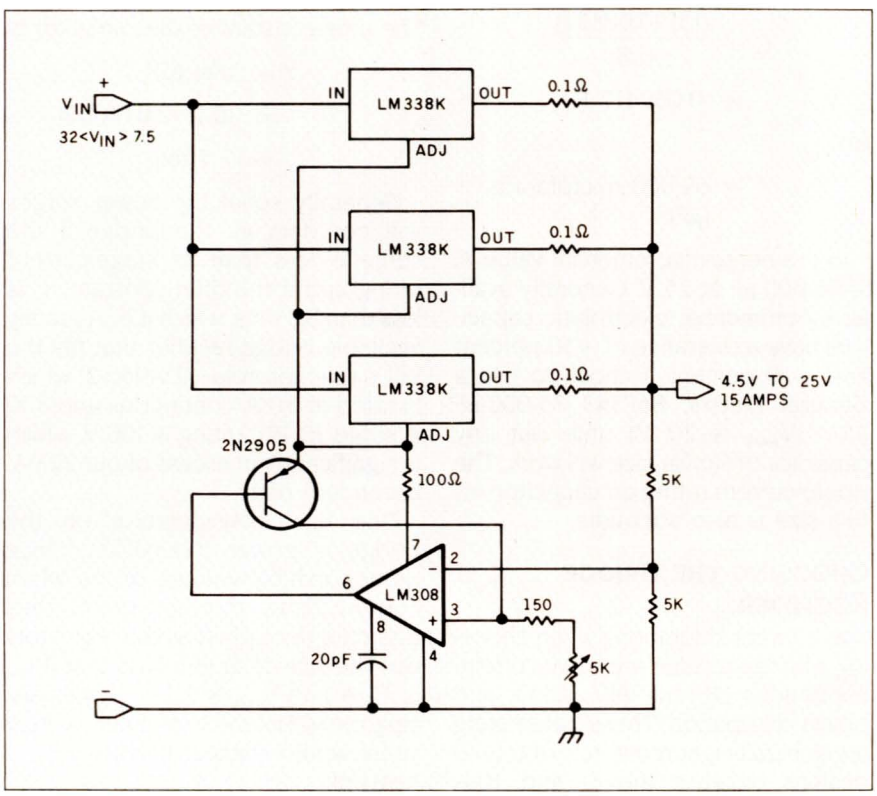

Figure 7: A 15-A *multiple regulator.*

the true (as opposed to the rule-of-thumb) PD could be significantly different and may or may not need extraordinary measures for heat removal. At the very least, you might like to know how to calculate real dissipation.

First, the only time the diode in the bridge conducts for a full cycle is immediately after turn-on. After that, it conducts only during that period when the input voltage is greater than V_c. In our supply, V_c is 18.6 V and V_{peak} is 20.4 V.

You'll remember that I previously said that the capacitor supplied power for 7.14 ms of every 8.33-ms charging cycle. The diode, therefore, conducts for the remaining 1.19 ms. (The time depends on the amplitude of the ripple.) During this time, the transformer and diodes must charge the capacitor from 18.6 to 20.4 V while they also supply power to the load. The required current is

$$I_p = \frac{(C)\ (V_{ripple})}{T_c}$$

$$= \frac{(0.075\ F)\ (1.8\ V)}{(1.19\ ms)}$$

$$= 113.4\ A$$

To this you add the output current of 15 A: I_p = 128.4 A peak. This translates to a peak power dissipation of

$$PD = I_p \times V_{rect}$$

$$= 128.4 \times 2.2$$

$$= 282.5\ W\ peak!$$

However, this occurs for each pair of diodes for only 1.19 out of 16.6 ms, and the average power becomes

$$= (282.5) \times (1.19/16.6)$$

$$PD = 20.25\ W\ average$$

Twenty watts isn't much. Simply mounting the bridge to the metal power-supply enclosure should provide enough cooling. To know for sure, however, look up the bridge's rated junction temperature, keep the PD value in mind, and calculate the cooling requirements when we get to heatsinking.

Voltage Regulators

Once the filter section is configured, our next consideration is the voltage regulator. All linear regulators perform the same task: convert a given DC input voltage into a specific,

stable, DC output voltage and maintain it over wide variations of input voltage and output load.

Entire books have been written on regulation circuits, and I think the subject material is adequate. The best sources are, in fact, the data manuals from the regulator-chip manufacturers. These manuals specify the I/O voltages and other specifications important to the power-supply designer. (Rather than go into the history and successive milestones in regulator evolution, I'm going to presume that you know a lot about this and want me to quickly get back to building a real supply.)

Three-terminal regulators come as fixed- or variable-voltage output devices (fixed-voltage output regulators can be configured to provide variable-voltage outputs). A typical +12-V fixed-voltage output regulator is shown in figure 5. The regulator has three terminals: in, out, and ground reference. In a 7812 regulator, $V_{out} - V_{in}$ should be 2.5 V; therefore, V_c should be 14.5 V for proper operation. The maximum input, disregarding power dissipation as a limiting factor, is 30 V.

If you want a 13.2-V supply, you would substitute a variable-voltage three-terminal regulator such as the LM338K shown in figure 6. Here, the three terminals become in, out, and voltage adjust. A potentiometer in the adjust line sets a reference level to the chip that determines its output voltage. This circuit also contains diodes to protect the regulator.

While manufacturers would like you to think otherwise, three-terminal regulators are not indestructible and can fail. One source of failure is the discharge of external capacitors through the regulator. For example, if the regulator output is shorted, C2 will discharge through the voltage-adjust pin. A diode, D2, diverts the current around the regulator protecting it. If the input is shorted, C1 can discharge through the output of the regulator, possibly destroying it. Diode D1 shunts the current around the regulator, protecting it. While such protection is merely insurance on hefty devices such as the LM338K, it is a necessity on lower-current regulators.

The LM338K can be adjusted for outputs from 1.2 to 32 V at 5 A, and devices can be paralleled to provide increased output current. Figure 7 outlines a circuit composed of three LM338Ks configured as a 15-A regulator that will satisfy the regulation requirements of the supply we are building. With a V_c input of 18.6 V at 115-V AC input, the supply is adjustable from about 4.5 to 15.6 V. Figure 8 is the final schematic of the unit.

Three-terminal regulators have been known to fail.

Layout Is Important

Three-terminal regulators employ wideband transistors to optimize response. Unfortunately, stray capacitance and line inductance caused by poor layout can introduce oscillations and unstable operation into these circuits. Keeping lead lengths short, as shown in photo 1, and adding external bypass capacitors will limit the problems caused by the regulator. Builder-introduced problems are another matter entirely.

Figure 9 illustrates a typical three-terminal-regulator supply layout, including the areas that can cause problems. All wires and connections within a power supply have resistance. In the case of high-current supplies such as ours, small resistances can introduce major errors. For example, a 0.1-ohm resistance at 15 A drops 1.5 V. Heavy wire should be used, and it is impor-

(continued)

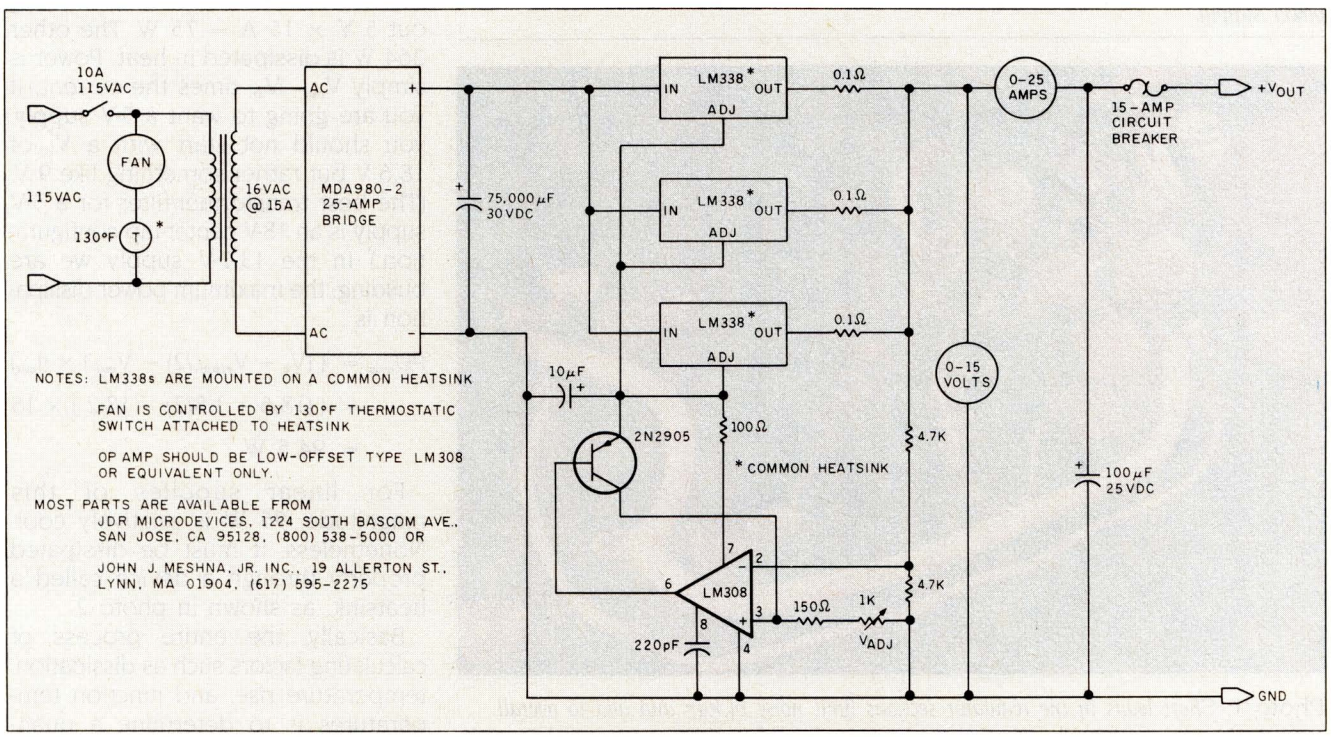

Figure 8: A 12- *to* 13.2-V 15-A *power supply that uses readily available components.*

tant to separate the charging-current and the output-current paths.

As demonstrated in figure 9, improper placement of the input capacitor can induce unwanted ripple on the output voltage. This occurs when the charging current to the filter capacitor influences the common ground or voltage-adjustment line of the regulator. As previously mentioned, the peak currents in the filter circuit are in excess of 100 A. The voltage drop across R2′ will cause the output to fluctuate as if the voltage trim were being adjusted.

The output-current loop is also susceptible to layout. In a three-terminal fixed-voltage output regulator, the output voltage is referenced between the output pin and the common line of the chip. Because the load current flows through R2′, R3′, and R4′ before reaching R_{load}, there may not be the correct voltage across the load due to accumulated voltage drops in the wiring. Also, while points B and C are both ground, they are at different voltages depending upon the resistance of and the current flowing through R3′. Similarly, resistance R4′ in the output lines continually reduces the output voltage as the current increases. This serves to negate the purpose of the regulator.

Figure 10 is a diagram of the proper layout. In the layout, all high-current paths should use heavy wire to minimize resistance, and the input-filter and output-load circuits are effectively separated. Most important, the wires from the transformer go directly to the bridge and then to the filter capacitor. Power to the rest of the circuit should come directly from the terminals of the capacitor and not from any point between the bridge and the capacitor. The result is two sets of wires (input from the bridge and output to the regulator) connected to the capacitor—but it is absolutely necessary. Mixing current paths is the most common problem in experimenter-built supplies.

The last layout consideration is the concept of a single-point ground. One point in the power supply must be designated as the ground, and the ground connections of the other circuit sections are connected to it. In practical terms, this is often just a metal strip or busbar called a ground bus. There should be virtually no measurable voltage between any two points on this bus. Don't be afraid to use thick wire!

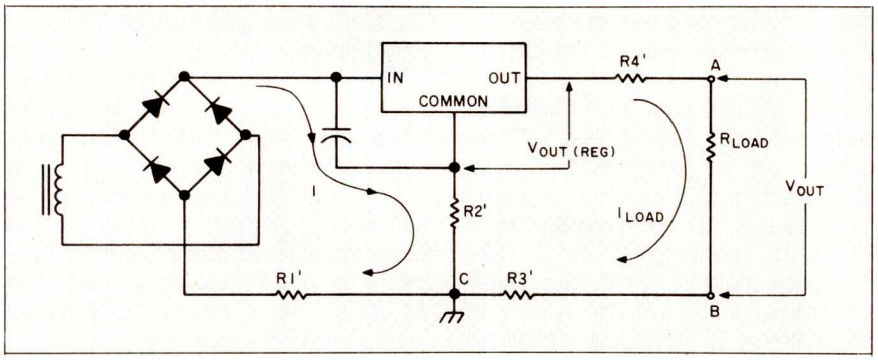

Figure 9: *Sources of layout-induced errors in a typical three-terminal-regulator power supply.*

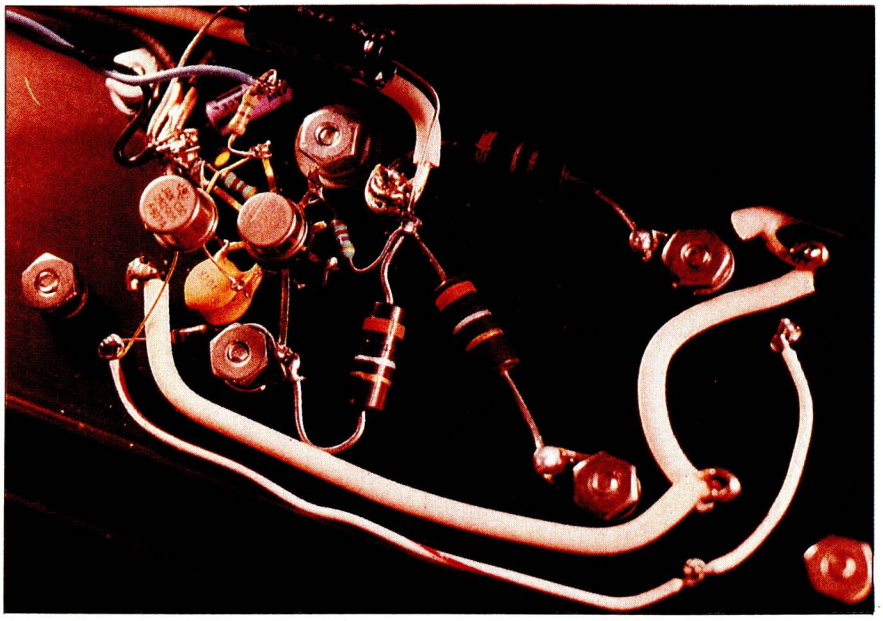

Photo 1: *Short leads in the regulator sections limit noise pickup and add to overall stability. In my prototype, I connected the op amp and other discrete components directly to the regulators on the bottom side of the heatsink.*

HEATSINKING

The final consideration is heatsinking. Generally speaking, linear power supplies, while easy to build, are grossly inefficient. A 45 percent-efficient design is good (the usual range is 40 to 55 percent). Before you start thinking of this as both a 5- and 15-V 15-A supply, remember the old saying, "what goes in, comes out." With a 16-V_{rms} 15-A input, we are putting in 16 × 1.414 × 15 = 339 W and taking out 5 V × 15 A = 75 W. The other 264 W is dissipated in heat. Power is simply $V_{out} - V_{in}$ times the current. If you are going to want a 5-V supply, you should not start with a V_c of 18.6 V but rather something like 9 V. (The best transformer/filter for a 5-V supply is an 18-V center-tap configuration.) In the 13.2-V supply we are building, the maximum power dissipation is

$$PD_{max} = ((V_c + V_{ripple}/2) - V_{out}) \times (I_{out})$$
$$= ((18.6 + 1.8/2) - 13.2) \times 15$$
$$= 94.5 \text{ W}$$

For linear supplies of this magnitude, 95 W is relatively cool. Nonetheless, it must be dissipated properly through a device called a heatsink, as shown in photo 2.

Basically, the entire process of calculating factors such as dissipation, temperature rise, and junction temperatures is to determine a quantitative value of absorbable power for a given set of physical conditions. For

a predetermined rise in heatsink temperature, you will be able to calculate the maximum power dissipation of the circuit to maintain that limit or, vice versa, to calculate the junction and heatsink temperatures given the input power.

Heatsink ratings and heat transfer through component mountings are stated in terms of thermal resistance: °C/W. For a particular application, it is necessary to determine the thermal resistance that a cooler must have to maintain a junction temperature that sustains adequate semiconductor performance. The basic relationship is

$$PD = \frac{\Delta T}{\Sigma R_\theta}$$

where PD = power dissipated in the semiconductor, ΔT = difference in temperature between ambient and the heatsink, and ΣR_θ = the sum of the thermal resistances of the heat flow path across which ΔT exists. In elaboration:

$$PD = \frac{T_j - T_a}{R_{jc} + R_{cs} + R_{sa}}$$

where T_j = the maximum junction temperature as stated by the semiconductor manufacturer (°C), T_a = ambient temperature (°C), R_{jc} = thermal resistance from junction to case of semiconductor (°C/W), R_{cs} = thermal resistance through the interface between the semiconductor case and the heatsink (°C/W), and R_{sa} = thermal resistance from heatsink to ambient air (°C/W).

The best way to understand this is to look at an example. First, we have a 7805T in a TO-220 case that is dissipating 5 W, and we select the proper heatsink. Given:

PD = 5 W
R_{jc} = 4°C/W (from the manufacturer)
T_j = 125°C maximum for TO-220 package
T_a = 50°C ambient
R_{cs} = 1°C/W insulator with heatsink grease

We use the equation for PD to solve for R_{sa}:

$$R_{sa} = \frac{125 - 50}{5} - (4 + 1)$$

$$R_{sa} = 10°C/W$$

Thermalloy part number 6299B has a 50° rise in temperature for a 12-W input. Therefore:

$$R_{sa} = 50/12 = 4.16°C/W$$

The 6299B is more than adequate for the task and will, in fact, heat up only 4.16 × 5 = 20.8°C over ambient in this example.

Getting back to the supply we are building, the minimum power dissipation is at maximum output voltage and vice versa. If the supply will be used in the range of 12 to 14 V, the heatsinking must accommodate the worst-case conditions. When the output is set for 12 V, the power dissipated in the regulator section will be 112.5 W (at 15 A). Each of the three regulators will be dissipating 112.5/3 or 37.5 W. The minimum R_{sa} is as follows. Given:

PD = 37.5 W
R_{jc} = 1.0°C/W
T_j = 125°C
T_a = 40°C
R_{cs} = 0.28°C/W (anodized washer and heatsink grease)

The R_{sa} minimum is thus

$$R_{sa} = \frac{125 - 40}{37.5} - (1 + 0.28)$$

$$= 0.99°C/W$$

A 3-inch piece of Thermalloy part number 6560 has a 0.70°C/W R_{sa}

(continued)

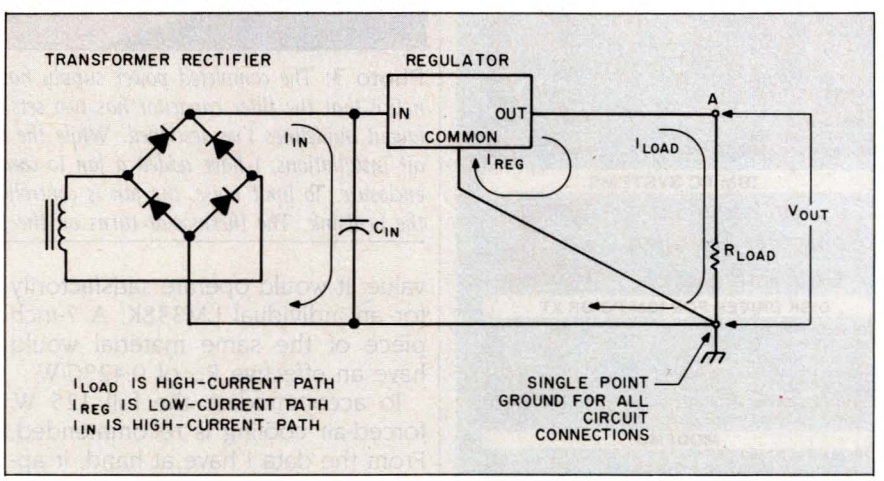

Figure 10: *The proper power-supply layout.*

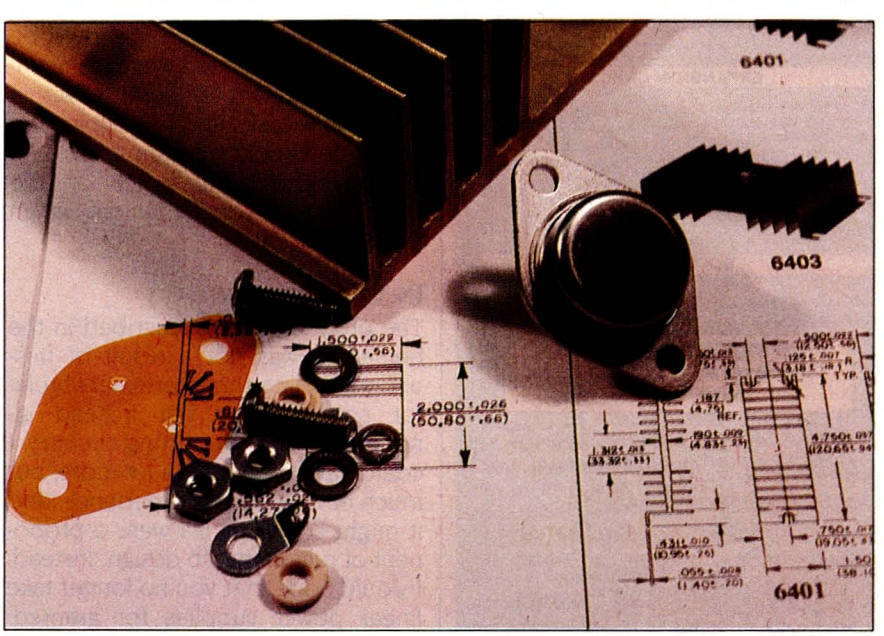

Photo 2: *Any high-current linear power supply needs large heatsinks to carry away the heat dissipated in the regulators. When more than one regulator is to be mounted on the same heatsink, special insulated mounting kits must be used.*

Inquiry 241

MidWest Micro-Peripherals

Save with Confidence

Let us earn your trust as we have that of others, such as:
Goodyear • General Motors • US Navy • Bell Labs
Conrail • Texas A&M University • General Electric
General Dynamics...

	List	Our Price
PRINTERS		
Star Gemini 10X (120 CPS)	$399	$259
Star Gemini 15X	549	389
Star Delta 10 / Delta 15 (160 CPS)		$CALL$
Star Radix 10 / Radix 15 (200 CPS)		$CALL$
Epson RX 80 (100 CPS)	399	249
Epson RX 80F/T (100 CPS)	499	289
Epson FX 80 (160 CPS)	689	399
Epson JX 80 Color	799	$CALL$
Epson LQ 1500 (200 CPS)	1495	$CALL$
Okidata 92P (80 Col., 160 CPS)	599	389
Okidata Apple Imagewriter Compatible	699	469
Okidata 93P (136 Col., 160 CPS)	999	599
Okidata Pacemark 2410P (150 CPS)	2495	1949
Panasonic 1091 (120 CPS)	499	299
Panasonic 1090, 1092, 1093		$CALL$
Toshiba 1340P (54 CPS)	985	769
Toshiba 1351P (100 CPS)	1855	1299
DAISYWHEEL PRINTERS		
Brother HR-15 (13 CPS)	599	399
Brother HR-25 (23 CPS)	895	669
Brother HR-35 (32 CPS)	1245	899
Silver Reed EXP 400	399	299
Silver Reed EXP 500 (16 CPS)	599	359
Silver Reed EXP 550 (19 CPS)	699	439
Silver Reed EXP 770 (36 CPS)	1295	829
Star PowerType (18 CPS, Bi-Dir)	499	349
Juki 6100 (18 CPS, Bi-Dir)	599	429
Juki 6300	999	769
Diablo 620	1095	899
Diablo 630 (40 CPS)	2499	1699
Daisywriter 2000 (40 CPS)	1495	859
IBM PC SYSTEMS		
PC's and PCXT's		
Complete Systems		
Call and Save!		
DISK DRIVES FOR IBM PC OR XT		
Teac Half Heights	299	169
Teac 2 Drive Kit - Complete	499	339
Tandon 100-2 (IBM Standard)	399	169
Maynard - 10 Meg. Internal Drive	1395	$CALL$
Maynard 20MB Tape Backup	1895	$CALL$
Tallgrass Drives w/Tape Backup		$CALL$
Turbo 10 10 MB Internal Hard Drive		$CALL$
MODEMS		
Hayes Smartmodem 300	289	219
Hayes Apple 2c Modem Pkg w/Software	399	269
Hayes Apple 2E Modem Pkg w/Software	399	239
Hayes Smartmodem 1200	699	469
Hayes Smartmodem 1200B w/IBM Software	599	399
Hayes Smartcom 11		$CALL$
MONITORS		
Amdek 300, 310		$CALL$
Amdek Color 500, 600, 700		$CALL$
Princeton Graphics Hi-Res Mon. Line		$CALL$
EXPANSION CARDS		
AST		
Six Pac Plus 64K, S/P/C+S/W	395	269
Complete AST Line		$CALL$
QUADRAM		
Quadboard, w/64K, Expandable 384K	295	
Complete Quadram Line		$CALL$
HERCULES		
Color Card	245	189
Graphics Card	449	339
Memory chip kit-64K 150ns-9 chips	99	49
Memory chip kit-64K 200ns-9 chips	89	39

SOFTWARE

Lotus 1-2-3, dBase III, Quickcode, Symphony, Multimate, PFS — **$CALL$ and $SAVE$** — **Hundreds of Titles!**

OUR PRICE COMMITMENT
MidWest will try in good faith to beat any nationally advertised price.

Prices subject to change and type errors

Free use of Visa, Mastercard

Call Today!

Information – Ordering

1-800-423-8215

In Ohio 1-800-321-7731

CUSTOMER SERVICE (513) 663-5488

We accept VISA, MASTERCARD – NO SURCHARGE!, AMEX, certified checks, money orders & COD's

MidWest Micro-Peripherals
(Division of Infotel, Inc.)
135 South Springfield St.
St. Paris, Ohio 43072
AD #B-109

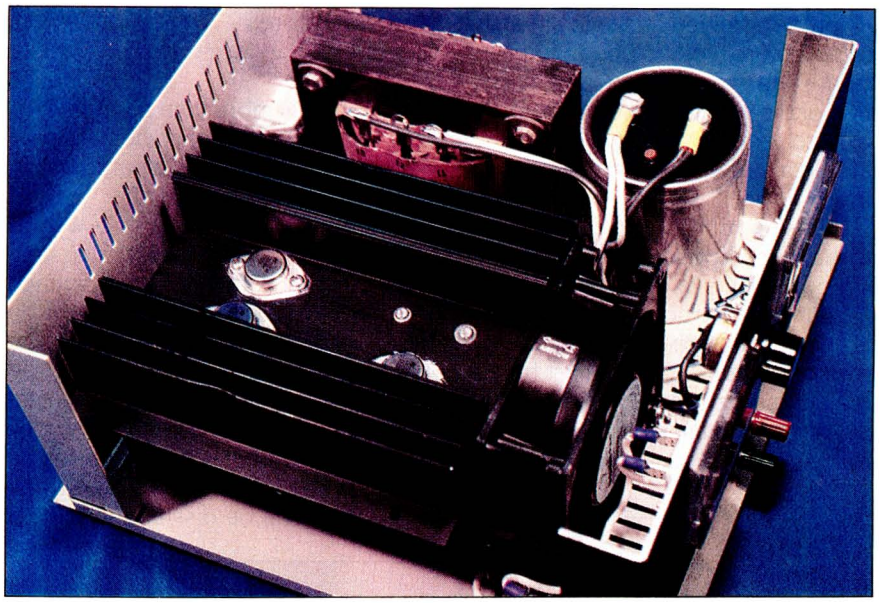

Photo 3: *The completed power supply has little extra internal space. You'll notice that the filter capacitor has two sets of connecting wires to conform to the layout guidelines I've described. While the heatsink is sized properly for ambient air installations, I have added a fan to compensate for the insulating effect of the enclosure. To limit noise, the fan is controlled by a 130°F thermostat attached to the heatsink. The thermostat turns on the fan only when necessary.*

value. It would operate satisfactorily for an individual LM338K. A 7-inch piece of the same material would have an effective R_{sa} of 0.42°C/W.

To accommodate the full 125 W, forced-air cooling is recommended. From the data I have at hand, it appears that R_{sa} is reduced approximately by half with 600-cubic-feet-per-minute forced convection. With a fan on the heatsink, 112.5 W should be adequately dissipated while maintaining a low ambient temperature within the supply case. Photo 3 shows the complete supply with fan. I added a 130°F thermostatic switch on the heatsink to turn on the fan only when needed.

In Conclusion

The product failure described in the beginning was not a result of misunderstanding three-terminal-regulator specifications but instead ignorance of the supporting circuitry. I could have discussed a lot more, but much of it relates to experience, and it might sound as if I were a proponent of rule-of-thumb design. Instead, I would hope that you no longer take linear power supplies for granted. Even in today's VLSI (very-large-scale integration) world we continue to depend on tried-and-true, even if somewhat ancient, designs. Linear power supplies have a definite place in our world of electronics.

I don't expect venture capitalists to get excited about power-supply design, but the next time the words "meltdown" and "incendiary" are mentioned, I know a few who will be listening more closely.

Circuit Cellar Feedback

This month's feedback begins on page 413.

Next Month

Steve will be building a low-cost serial EPROM programmer. ■

This article is dedicated to Kram Nurtam and the E product. May that great heatsink in the sky cool any thoughts he might have of designing another linear power supply.

Editor's Note: Steve often refers to previous Circuit Cellar articles. Most of these past articles are available in reprint books from BYTE Books, McGraw-Hill Book Company, POB 400, Hightstown, NJ 08250.

Ciarcia's Circuit Cellar, Volume I covers articles that appeared in BYTE from September 1977 through November 1978. *Volume* II covers December 1978 through June 1980. *Volume* III covers July 1980 through December 1981. *Volume* IV covers January 1982 through June 1983.

To receive a complete list of Ciarcia's Circuit Cellar project kits, circle 100 on the reader-service inquiry card at the back of the magazine.

Make room for a new assistant.



Introducing the IBM PC Engineering/Scientific Series.

It puts answers on your desktop.

The IBM Personal Computer Engineering/Scientific Series is an unusually flexible and talented assistant.

As you can see from the box on the right, you can select exactly the workstation you need from a set of compatible engineering and scientific enhancements to the IBM Personal Computer Family. Configure an IBM Personal Computer to help with product design, perform numerical analysis, or monitor and control laboratory experiments.

For the reasonable cost of IBM PC/ES Series enhancements to an IBM Personal Computer, you can do jobs that traditionally demanded time on a mainframe. Display data and plot results as they happen. Control both the business and technical sides of your job from one compact workstation.

And if you want host or networking communications, the IBM Personal Computer has the right connections.

Advanced color graphics.

The IBM PC/ES Series is designed to make a graphic impression in jobs ranging from computer aided design applications and image processing to business presentations.

The IBM PC Professional Graphics Display can make even good results look better with a 640 x 480 screen and up to 256 simultaneous colors available from a palette of 4,096. An advanced anti-glare screen makes the Professional Graphics Display easy to work with and easy on your eyes.

The IBM PC Professional Graphics Controller's onboard 8088 processor can help improve productivity by speeding throughput of even the most sophisticated graphics projects. The graphics firmware support, resident on the adapter, includes 2D and 3D graphics primitives, programmable display lists, and a definable character set to help make your graphics work more creative.

And there's an emulation mode that gives you immediate access to the entire range of graphics programs already written for the IBM Personal Computer.

Productive programming environment.

IBM PC/ES Series layered graphics software is geared for increased programming productivity.

It supports a 32K x 32K addressable point data base, and includes high-level graphics subroutines that are consistent with the Draft ISO and ANSI GKS Standards.

The IBM PC Graphics Development Toolkit provides a device-independent programming environment to help simplify graphics programming tasks. Device independence also helps promote program longevity, since your graphics applications can be programmed to interface with future generations of graphics devices.



IBM Personal Computer AT with Engineering/Scientific Series components.

Little Tramp character licensed by Bubbles Inc., s.a.

Precise high-speed computation.

IBM PC Professional FORTRAN by Ryan-McFarland Corporation—a full ANSI 77 implementation plus enhancements—gives your applications optimized performance on the IBM Personal Computer.

Professional FORTRAN helps you get precise results when you want them, without unnecessary use of valuable mainframe time.

It enables you to begin work immediately on large or small host programs or to recompile existing FORTRAN programs to run on an IBM PC with Engineering/Scientific enhancements. And Professional FORTRAN allows you to utilize all the IBM PC/ES Series graphics development tools in your desktop application work.

Accurate instrumentation.

The IBM PC/ES Series gives you a single point of control for a laboratory full of work.

You can control and monitor laboratory or industrial processes, automated electronic testing, and the status of ongoing experiments via the IBM PC Data Acquisition and Control Adapter. Programming support provides flexible high-level and low-level language interfaces. Powerful built-in diagnostics make installation of the Data Acquisition and Control Adapter quick and easy.

A single half-size IBM PC General Purpose Interface Bus Adapter lets you interactively control instruments as diverse as plotters and spectrum analyzers through application programming. High-level and low-level language access makes it easy to plot and display data. Menu-driven supporting software includes a versatile hardware configurator to aid in installation.

IBM Personal Computer Engineering/Scientific Series Components

Processors
IBM Personal Computer AT
IBM Personal Computer XT
IBM Personal Computer with expansion unit

Color Graphics Hardware
IBM Personal Computer Professional Graphics Display
IBM Personal Computer Professional Graphics Controller

Color Graphics Software
IBM Personal Computer Graphical Kernel System
IBM Personal Computer Graphical File System
IBM Personal Computer Plotting System
IBM Personal Computer Graphics Terminal Emulator
IBM Personal Computer Graphics Development Toolkit

High-Speed Computation
IBM Personal Computer Professional FORTRAN

Instrumentation/Data Acquisition
IBM Personal Computer Data Acquisition and Control Adapter
IBM Personal Computer Data Acquisition and Control Adapter Distribution Panel
IBM Personal Computer Data Acquisition and Control Adapter Programming Support
IBM Personal Computer General Purpose Interface Bus Adapter
IBM Personal Computer General Purpose Interface Bus Adapter Programming Support

Complete the equation.

This assistant is ready to start work immediately. There are over 350 independently developed engineering and scientific application programs—plus many IBM Personal Computer business packages—available today for the affordable IBM PC/ES Series.

For information about the IBM PC Engineering/Scientific Series or to order a catalog of available engineering/scientific programs, see your authorized IBM Personal Computer dealer, IBM Product Center, or IBM marketing representative. For a store near you, call 1-800-447-4700. In Alaska and Hawaii, 1-800-447-0890.

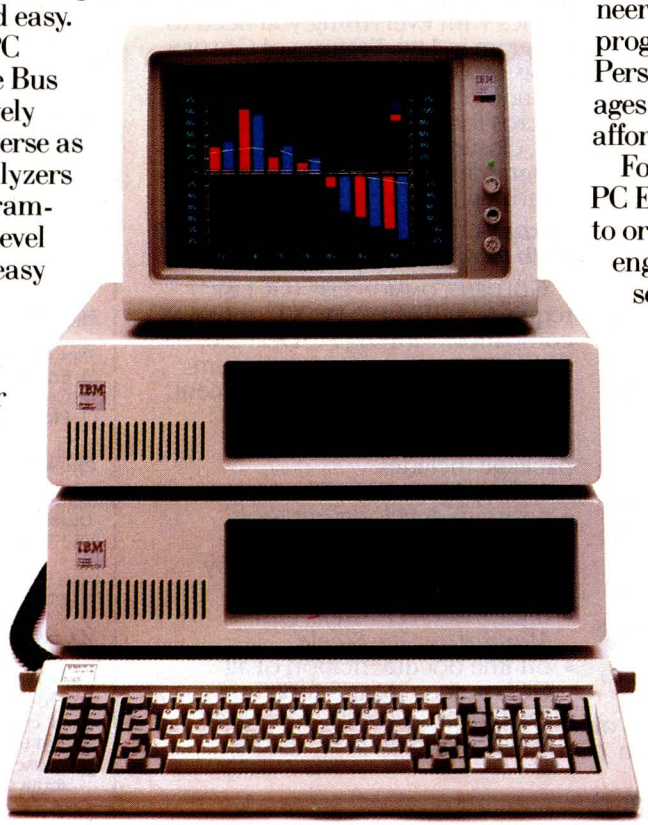

IBM Personal Computer with Expansion Unit and Engineering/Scientific Series components.

IBM®

Your Gateway to Artificial Intelligence

GOLDEN COMMON LISP



IBM Personal Computer

Gold Hill Computers brings the language of Artificial Intelligence to Your Personal Computer.

You know you want to do more with Artificial Intelligence. Two problems have held you back: the expense of the hardware and the scarcity of LISP programmers. *But no longer.* GOLDEN COMMON LISP® makes it possible for you to learn and use LISP on your personal computer. You will know the excitement of expert systems, intelligent data access, and smart programs.

COMMON LISP is the new LISP standard developed by researchers from universities and corporations such as CMU, MIT, Stanford, UC Berkeley, Digital, LMI, Symbolics, and Texas Instruments. GOLDEN COMMON LISP is the right LISP for you because it is based on COMMON LISP. Programs you develop using GOLDEN COMMON LISP on your personal computer will run in the COMMON LISP environments of larger, more expensive machines.

With GOLDEN COMMON LISP, every programmer becomes a LISP programmer. GOLDEN COMMON LISP comes with the LISP Explorer,™ an interactive instructional system developed by Patrick H. Winston and San Marco Associates. The San Marco LISP Explorer guides you through the steps of LISP programming and makes the full range of LISP's power accessible to both novices and experienced programmers. The new second edition of the classic LISP textbook by Winston and Horn is also included.

GOLDEN COMMON LISP comes complete with the intelligent GMACS editor (based on EMACS), on-line documentation of all LISP and GMACS functions, a comprehensive user manual, and program debugging tools. In short, GOLDEN COMMON LISP comes with everything you need to program in LISP. Features of GOLDEN COMMON LISP for advanced users include co-routines for multitasking, macros for code clarity, streams for I/O, closures for object-centered programming, and multiple-value-returning functions for efficiency.

GOLDEN COMMON LISP—the intelligent path to Artificial Intelligence.

GOLDEN COMMON LISP (GCLISP™) requires an IBM PC, PC XT, or IBM PC compatible running PC-DOS 2.0. 512K bytes of memory are recommended for program development. A version of GCLISP for the DEC Rainbow is also available. The package includes:

- an intelligent GMACS editor
- program development tools
- the San Marco LISP Explorer
- the new 2nd edition of *LISP* by Winston and Horn
- the *COMMON LISP Reference Manual* by Guy Steele
- on-line documentation of all GCLISP and GMACS functions
- the GOLDEN COMMON LISP Users' Guide and Reference Manual

ORDER GCLISP TODAY using the coupon below. Or call our Customer Service Department at:

(617) 492-2071

Gold Hill Computers
Customer Service
163 Harvard Street
Cambridge, MA 02139

B10-84

Name

Organization

Address

Phone Today's Date

Type of computer

☐ Enclosed is a check to Gold Hill Computers for GCLISP.
☐ Please bill my ☐ MasterCard ☐ VISA card.

Card # Expiration Date

Signature

Quantity	Description	Unit Price	Total Price
	GOLDEN COMMON LISP	$495.00	
		Subtotal	
		MA residents add 5% Sales Tax	
		Total Amount	

University purchasers should inquire about our educational discount. We pay shipping on all credit card and pre-paid orders within the United States.

☐ Please send me more information about GCLISP.

GOLD HILL COMPUTERS

163 Harvard Street, Cambridge, Massachusetts 02139

GOLDEN COMMON LISP is a registered trademark of Gold Hill Computers. GCLISP is a trademark of Gold Hill Computers. The LISP Explorer is a trademark of San Marco Associates. *LISP* is copyrighted by Addison-Wesley Publishing Company, Inc. The *COMMON LISP Reference Manual* is copyrighted by Digital Equipment Corporation. Rainbow is a trademark of Digital Equipment Corporation. IBM is a registered trademark of International Business Machines.

BY BILL BENZON

THE VISUAL MIND AND THE MACINTOSH

MacPaint provides a tool for thinking

Late in 1974 Ed Roberts and Eddie Curry, principals in Micro Instrumentation and Telemetry (MITS), designed and began marketing a microcomputer kit. That kit was featured in the January 1975 issue of *Popular Electronics* and the rest, as they say, is history.

In my opinion, the Apple Macintosh is the most significant microcomputer since that original MITS kit, but its importance hasn't been adequately explained. The Mac is user friendly, but even more important is what lies beyond that user-friendly interface—MacPaint.

MacPaint provides visual power. It is fun to use—you can zap the mouse around, draw a zillion rectangles in a minute, put four reflecting planes in the drawing space, and create amazing symmetrical designs with mere flicks of the wrist. Why is this important? As figure 1 indicates, one hemisphere of the brain is more or less verbal while the other is more or less visual (see reference 1). The Macintosh is a tool for the visual brain.

The Mac allows us to do fascinating things with typography. We can crank out bar charts, pie charts, and line graphs. We can do maps 50 ways from Sunday and play with line drawings to our hearts' content. But we can also think visually and relate visuals to verbals with a facility not readily available before.

The Macintosh is a tool for thinking. To understand the implications of this statement, we need to know something about the thinking process. In this article I hope to discuss thinking in a way that will make the significance of the Macintosh more obvious. Consequently, most of this article is specifically about thinking and only indirectly about the Macintosh.

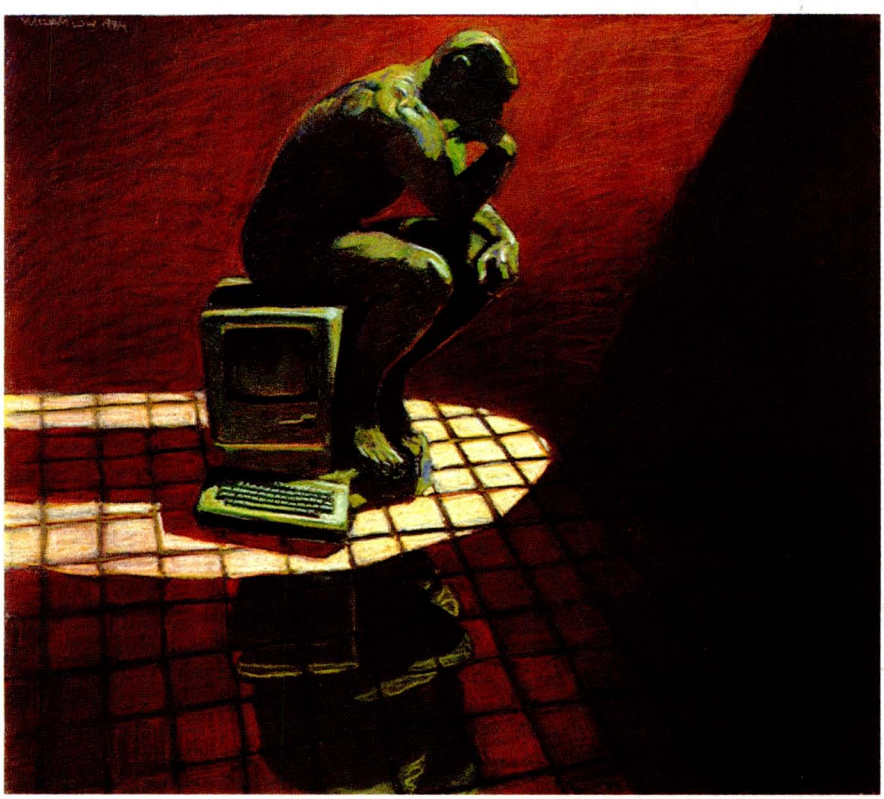

ILLUSTRATED BY WILLIAM LOW

VISUAL THINKING

The anecdotal literature on creativity is full of stories about great thinkers who work in images. Consider the

(continued)

Bill Benzon (Language, Literature, and Communication, Rensselaer Polytechnic Institute, Troy, NY 12181) holds a Ph.D. in English from State University of New York at Buffalo. He has done research on cognitive science and literary theory and has held a fellowship with NASA to work on a strategic computing plan. Bill also does consulting and freelance writing.

following passage from a letter by Albert Einstein (see reference 2):

> The psychical entities which seem to serve as elements in thought are certain signs and more or less clear images which can be "voluntarily" reproduced and combined. . . . The above mentioned elements are, in my case, of visual and some of muscular type. Conventional words or other signs have to be sought for laboriously only in a secondary stage, when the mentioned associative play is sufficiently established and can be reproduced at will.

Thus it seems Einstein's primary mode of thought was not words or even mathematical symbols. He thought in images and then translated those image-born insights into verbal or mathematical form.

Or consider Watson and Crick and the double helix. Why did they actually build a three-dimensional model of the helix while they were working up the basic ideas (see reference 3)? Because however important visual thinking is, it is difficult to hold an image in your mind and work with it—especially if it is a three-dimensional shape. But if you can externalize the image and make a model as Watson and Crick did, then working with it becomes easier.

Writing and drawing provide external support for thought. Writing supports the work of the verbal brain. Learning the mechanics of writing—how to form the letters or use a keyboard—is relatively easy, and once that is out of the way, you can go on to the tough stuff—writing things that make sense and may be beautiful as well. However, images, whether two- or three-dimensional, are different. Becoming proficient in the mere mechanics of freehand drawing—for example, drawing a picture of a horse that looks more like a horse than like a camel or a rabbit—is difficult. Technical drawing is easier but it is still more difficult than writing.

By making it easy for you to create images and work with them, the Macintosh can help you to think.

By making it easy for us to create images and work with them, the Macintosh can help us to think. Perhaps our society will create a pool of images for thinking comparable to our pool of proverbs and stories. We have a large number of proverbs and countless stories, such as Aesop's fables, which we learn and use for thinking. We apply these proverbs and fables to situations that arise and from that we get some idea of how to act. Why not have a pool of images that we can use in the same way? What I have in mind can best be illustrated by an example. It is called the gestalt switch.

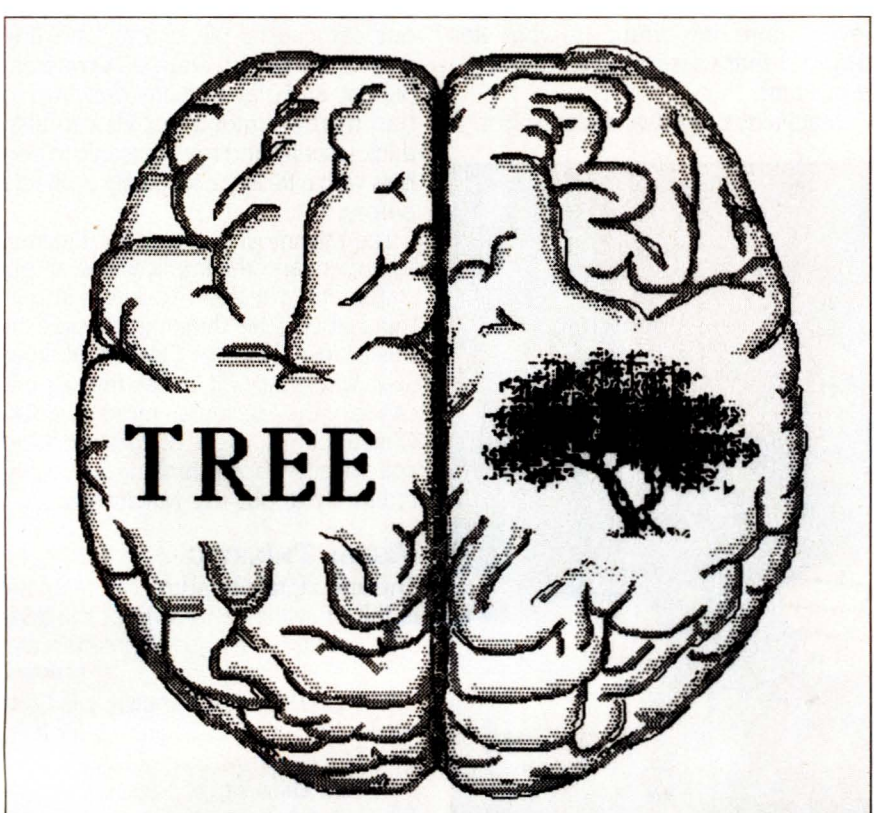

Figure 1: *The left or verbal side and the right or visual side of the human brain. The tree is a McPic image.* (McPic *is a product of Magnum Software,* 21115 *Devonshire St., Ste.* 337, *Chatsworth,* CA 91311, (818) 700-0510).

The Gestalt Switch

In 1962 Thomas Kuhn published a book on the nature of scientific revolutions that set off bombshells in the academic world (see reference 4). For example, Kuhn was interested in how Copernicus's *heliocentric* model of the solar system replaced Ptolemy's *geocentric* model, how Newtonian mechanics replaced Aristotelian mechanics, and how Newtonian mechanics was then replaced by relativistic and quantum mechanics. You would think that as more observations came in and older theories didn't hold up, they would be replaced by newer ones. However, in the case of Copernicus's heliocentric model, the old theory fit the available data better than the new one.

Kuhn's conclusion is a bit compli-

(continued)

MICRO CAP and MICRO LOGIC put your engineers on line... not in line.





How many long unproductive hours have you spent "in line" for your simulation? Well, no more. MICROCAP and MICROLOGIC can put you on line by turning your PC into a productive and cost-effective engineering workstation.

Both of these sophisticated engineering tools provide you with quick and efficient solutions to your simulation problems. And here's how.

MICROCAP: Your Analog Solution

MICROCAP is an interactive analog circuit drawing and simulation system. It allows you to sketch a circuit diagram right on the CRT screen, then run an AC, DC, or Transient analysis. While providing you with libraries for defined models of bipolar and MOS devices, Opamps, transformers, diodes, and much more, MICROCAP also includes features not even found in SPICE.

MICROCAP II lets you be even more productive. As an advanced version, it employs sparse matrix techniques for faster simulation speed and larger networks. In addition, you get even more advanced device models, worst case capabilities, temperature stepping, Fourier analysis, and macro capability.



"Typical MICROCAP Transient Analysis"

MICROLOGIC: Your Digital Solution

MICROLOGIC provides you with a similar interactive drawing and analysis environment for digital work. Using standard PC hardware, you can create logic diagrams of up to 9 pages with each containing up to 200 gates. The system automatically creates the netlist required for a timing simulation and will handle networks of up to 1800 gates. It provides you with libraries for 36 user-defined basic gate types, 36 data channels of 256 bits each, 10 user-defined clock waveforms, and up to 50 macros in each network. MICROLOGIC produces high-resolution timing diagrams showing selected waveforms and associated delays, glitches, and spikes—just like the real thing.



"Typical MICROLOGIC Diagram"

Reviewers Love These Solutions

Regarding MICROCAP . . . "A highly recommended analog design program" (PC Tech Journal 3/84). "A valuable tool for circuit designers" (Personal Software Magazine 11/83).

Regarding MICROLOGIC . . . "An efficient design system that does what it is supposed to do at a reasonable price" (Byte 4/84).

MICROCAP and MICROLOGIC are available for the Apple II (64k), IBM PC (128k), and HP-150 computers and priced at $475 and $450 respectively. Demo versions are available for $75.

MICROCAP II is available for the Macintosh, IBM PC (256k), and HP-150 systems and is priced at $895. Demo versions are available for $100.

Demo prices are credited to the purchase price of the actual system.

Now, to get on line, call or write today!

Spectrum Software
1021 S. Wolfe Road, Dept. B
Sunnyvale, CA 94087
(408) 738-4387

Inquiry 328

cated but the basic point can be made rather easily with an image. The upper image in figure 2 shows one of those ambiguous pictures from freshman psychology textbooks. Is it a picture of two men facing each other or is it a vase? You can see it either way, and you can switch back and forth between the two interpretations easily.

Kuhn concluded that scientific data, observations, and hard empirical facts are like this drawing. Before they have meaning, they must be interpreted by a theory; different theories describe them in different ways and lead to different expectations about future observations. In other words, if you see the ambiguous image as two men, you will talk about noses, lips, and chins and expect to find shoulders and arms beneath them. But if you see it as a vase, you will refer to the base, the rim, and the constriction in the middle and expect to see it on a tabletop or a shelf.

Now, imagine that you give two people in two different rooms copies of this ambiguous figure. You tell one that it's a picture of two men and the other that it's a vase. If you give these people a phone and let them talk to one another, how long will it take them to discover they are talking about the same drawing? After all, one is talking about noses and chins while the other is discussing rims and bases. That, says Kuhn, is the problem between scientists with different theories about the same data: they live in different intellectual worlds.

Of course these two people would communicate better if they described the image in terms of, for example, pixels. Why can't scientists do the same? Science isn't as simple as this visual analogy might lead you to believe. Like all analogies, this one is limited; it won't take you all the way, but it gives you a good start.

The original ambiguous figure was created by a school of psychologists interested in perception. They believed that we see images whole, not just as the sum of individual parts, and so they talked of *gestalt* (a German word meaning "whole") psychology. The phenomenon of switching back and forth from one interpretation of a visual image to another has come to be known as the *gestalt* switch and the ambiguous figures that evoke this switch are useful things to think with. They are the visual equivalent of a proverb or a fable.

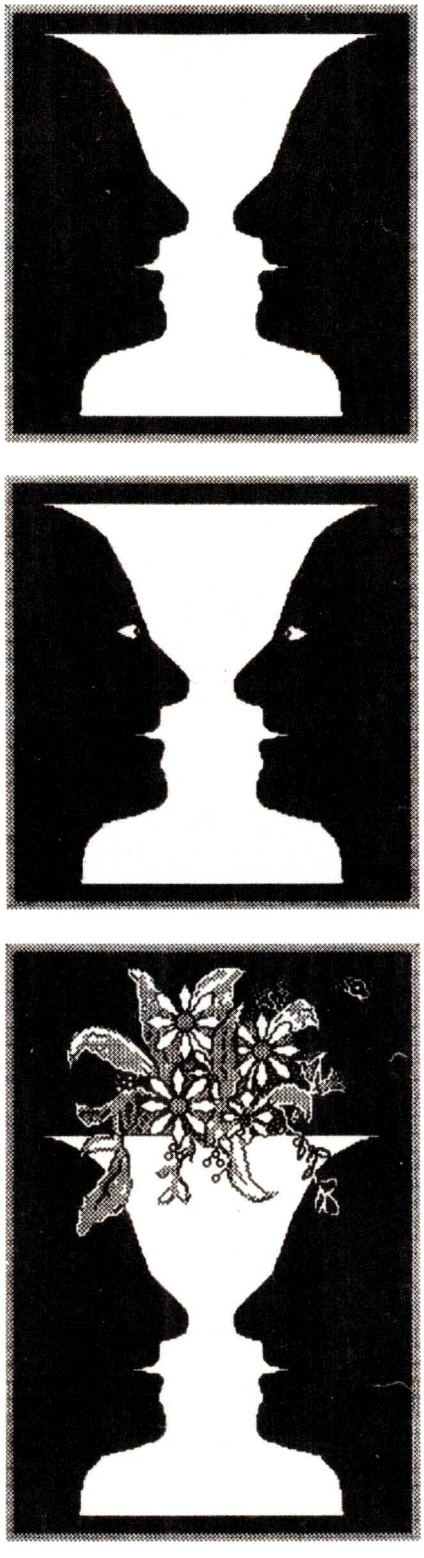

Figure 2: *The gestalt switch. The drawing at the top is ambiguous; you can see it as either two men facing one another or as a vase. You can emphasize either one of these interpretations by changing the drawing as shown in the middle and at the bottom.*

We all have our own visual proverbs but we don't think of them as such. Our society doesn't gather them together and pass them on like it does verbal proverbs and fables, partly because images are more difficult to reproduce and distribute than words. Talking is easy, but drawing requires that you have proper materials and skills, which aren't always at hand. Words are easy and inexpensive to print, but images are more difficult and therefore more costly.

Images are much easier to create and distribute through the Macintosh's graphics facilities. You can exchange printouts or disks or send the images through computer networks. As this power becomes available to more people, you may well begin to see people creating, exchanging, and collecting visual proverbs.

Webs of Ideas

The further development of a visual society is particularly important as we stand on the threshold of the information age because the intellectual world of information, of computing, is an intensely visual one. From circuit design to chip layout, from flowcharts to data structures, computing is visual. If good diagrams were easier to draw, then more would be drawn, and more people would grasp what computing is about. And the more people understand computing, the more they will use it.

Consider the area of knowledge representation (a subfield of artificial intelligence). Many researchers use a notation called the *directed* graph (see figure 3). The ellipses are called nodes and the connections between them are called arcs. Nodes stand for concepts while arcs indicate the relationships between them. In this example VAR means "variety of" while CMP means "component of." Thus, maple

(continued)

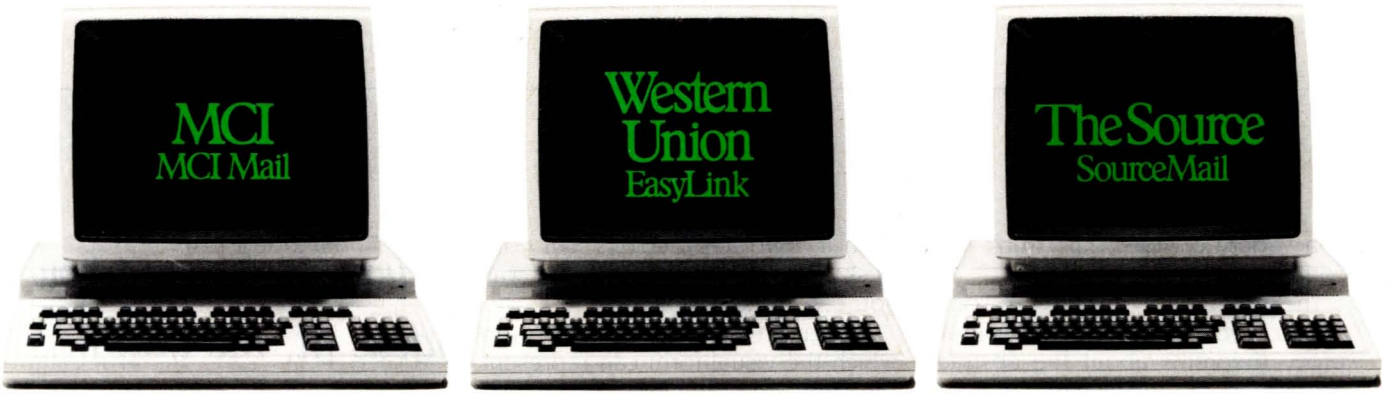

Which electronic mail service delivers much more than mail?

Every one of these electronic mail services does a very good job of delivering the mail.

But only one delivers so many more online services with equal expertise.

The Source.

With The Source, you can have the daily news delivered along with your daily mail. Make airline reservations. Trade stocks. Hold a computer conference. Communicate with thousands of people who share your interests.

Even get the latest word on new hardware and software products, in seconds.

All this, and more, along with the electronic mail service called "the most powerful available anywhere."

And all for just $49.95, plus reasonable hourly usage fees.

Call 800-336-3366 and you can have the power of The Source working for you in a matter of minutes.

Or for more information, visit your nearest computer dealer or mail the coupon below.

The Source is a service mark of Source Telecomputing Corporation, a subsidiary of The Reader's Digest Association, Inc. The Source services are offered in participation with Control Data Corporation.
© Source Telecomputing Corporation, 1985.
Easy Link℠ is a service mark of Western Union.

Please send me more details about The Source.

Name _____ Telephone # _____

Address _____

City _____ State _____ Zip _____

☐ ☐ I own a personal computer.
yes no

Mail to: Source Telecomputing Corp.
1616 Anderson Road
McLean, VA 22102

CCBYJA

INFORMATION NETWORK
The Source℠
The most powerful resource any personal computer can have.

SourceMail℠ Electronic Mail
Mailgram® Message Service
PARTICIPATE™ Computer Conferencing
CHAT Interactive Communications
News Bulletins
UPI News Service
Associated Press
Scripps-Howard News Service
Accu-Weather™
The Washington Post Electronic Edition
Sports
BYLINES Feature News
Portfolio Management
Real-Time Stock Quotes
Delayed Stock Quotes
Spear Securities Online Trading
Media General STOCKVUE
Donoghue Investment Newsletter
INVESTEXT Research Reports (1st Qtr. 1985)
Management Contents Publication Abstracts
Employment Services
UNISTOX Market Reports
Commodity World News
BIZDATE Business Magazine
MICROSEARCH™ Hardware, Software Reviews
Member Directory
POST Bulletin Board Classifieds
Member Publications
Official Airline Guide®
A-Z Worldwide Hotel Guide
Travel, Hotel Reservations & Ticketing
Restaurant Guides
Travel Tips, Tours, Discounts
Movie Reviews
CompuStore Electronic Shopping
Games, Educational Quizzes

is a variety of tree while trunk is a component of it.

The graph is not, however, the only notation you can use. If you want to prove theorems about the abstract properties of knowledge structure then you'll choose a propositional notation (see listing 1). If you want to program the propositional notation into a computer, then you'll have to think in terms of a complex list with addresses and pointers. But if you want to think about how ideas fit together and teach this material to others, then the graph notation is the most useful one. Further, if you are dealing with structures that are three or four times more complex than the one I've shown and if you typically work with structures 10, 100, or 1000 times more complex, then the propositional form is unreadable. You can't do any useful work with it. However, the visual representation is still useful; even if your graph covers half your desk and starts climbing up the wall you can work with it.

The graph is a notation system in which the visual form can represent the structure of the information very clearly. Well-drawn graphs show important and interesting information structures at a glance. The more you can encompass in a single mental operation, in this case, a glance, the better you can work with your material (see reference 5). A graph extends the range of a single mental operation far beyond that available with a listing. A single glance at a list of commands tells you nothing; you have to read each one, line by line, and painstakingly assemble them in your mind.

Conceptual graphs were not, however, invented yesterday. Many of us learned English grammar through sentence diagramming, which is a technique for giving visual form to grammatical structure. One important contemporary form of this is called dependency theory, which, in one version or another, is important in computer models of language (see reference 6). One dependency theorist, David G. Hays, says that he was inspired, in part, by the sentence diagramming he did in his youth.

If you think about how ideas fit, the graph is more useful than propositional notation or a complex list.

Beyond this consider the work of Tony Buzan and Gabriele Rico, who have been developing techniques for helping people to think and to write better (see references 7 and 8). Both teach people to draw networks—Buzan calls them mind maps, Rico calls them clusters. Their networks are much freer than the ones knowledge representation theorists use, but their purposes are quite different. The theorists are developing formal models of how people think and they find the network notation useful for this. Buzan and Rico are interested in helping people think and they find that drawing networks is a much better way of working out preliminary ideas than trying to put thoughts into an outline. I suppose that the work of knowledge representation theorists could be used to justify these techniques for helping people to think. For example, if we in fact think with networks, then doodling network diagrams seems to take advantage of that. But that is a long and complex argument, one irrelevant to my main point—that diagrams help us think.

Listing 1: *The propositional representation of the relationships shown in the directed graph in figure 3.*

```
VAR (maple,tree)
VAR (oak,tree)
VAR (pin oak,oak)

CMP (leaves,tree)
CMP (trunk,tree)
```

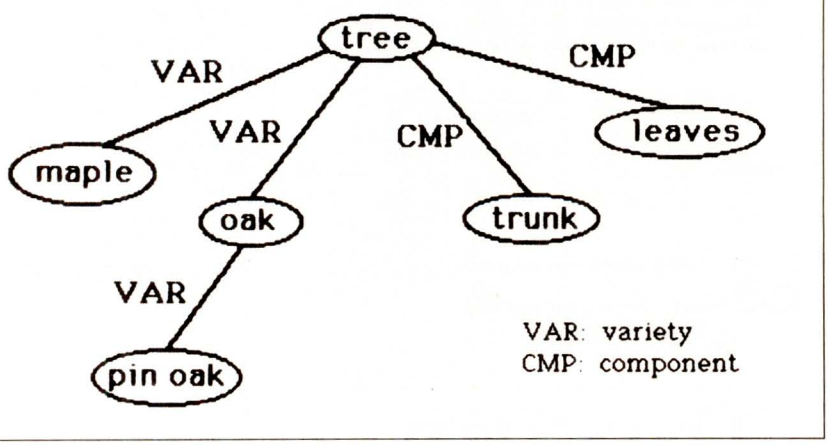

Figure 3: *A notation used in knowledge representation known as the directed graph. The nodes (ellipses) stand for concepts while the arcs (the connections between the nodes) indicate the relationships between those concepts.*

THE METHOD OF LOCI

Public speaking was very important in ancient Greece and aristocratic youths

(continued)



Run INTEL software
and full-screen symbolic debugger
on your IBM-PC

- Get our complete development solution: compilers, assembler, linker, debuggers, and emulators for the entire 8086 family: 8086, 8087, 8088, 80186, . . .
- Run under MS-DOS with our GenePak®PLM package, containing Intel's PLM86, ASM86, LINK86, LOC86, LIB86, and OH86. Options include PASCAL86, FORTRAN86, and C86. Or use the Intel software you already own.
- It takes less than 6 minutes to recompile a 1000-line PLM86 module and relink it with 34 others to regenerate a 40K program.
- Use GeneScope®, our interactive, fully symbolic debugger and emulator line. It features macros, help, on-line assembly, automatic disassembly and trace with scrolling, simultaneously supporting separate screens for debug and source-file viewing during one debug session. GeneScope is easier to use and faster than PSCOPE*, ICE-86*, and I²ICE*, loading 100K programs in under 15 seconds. Its powerful user interface runs in your PC, either connected to your target system with GeneProbe®, our full in-circuit emulator, or as a software-only debugger for programs in your PC or your target system.
- Use our PC ◄► MDS datalink program to bring over your existing libraries or store back your new modules. It transfers files of any kind, in either direction.

Call us today.

Genesis™
Microsystems

196 Castro Street, Mountain View, CA 94041 (415) 964-9001

Genesis is a licensed OEM of Intel Corp.

*are Trademarks of Intel Corp.

INTERNATIONAL DISTRIBUTORS • Instrumatic: **Deutschland**—München, Tel. 89/85 20 63 • **España**—Madrid, Tel. 1/250 25 77—Malaga, Tel. 5/221 38 98 • **Schweiz**—Rueschlikon, Tel. 1/724 14 10—Geneve, Tel. 022/36 08 30 • **United Kingdom**—High Wycombe, Tel. 494 450 336 • **Israel**—Savyon: Micro-Bit, Tel. 03-380098 • **Japan**—Tokyo: Asahi Business Consultant Co., Tel (03) 543-3161; Showa System Laboratory, Tel. (03) 361-7131.

were extensively trained for it. Part of that training was in the art of memory, and the central technique was the method of *loci* (see reference 9).

To use this method you would choose some place complex enough to contain many nooks, corners, and views (that is, loci, or places)—a temple generally was suggested (see figure 4a). You would then walk through this place according to some appropriate route (see figure 4b). This memorized walk, this visuo-kinetic image, is your memory map. Whenever you want to memorize a speech you start at the beginning and associate an image related to your first idea with the first place on your map, your second idea with the second place on your map, etc. To deliver the speech you conjure up the mental map and walk through it on the standard path. As you move from place to place the ideas you had associated with each place will come back to you.

Consider, for example, the speech that Marc Antony delivered at Caesar's funeral (from Shakespeare's *Julius Caesar*, Act III, scene ii, lines 72 and following). For the first line—"Friends, Romans, countrymen, lend me your ears . . . "—Antony might have associated the image of a bunch of ears with the first locus, the first position in his walk through the temple. A skull would be a natural association for the second line—"The evil that men do . . . "—at the second position. Further lines would be linked to further loci through appropriate images.

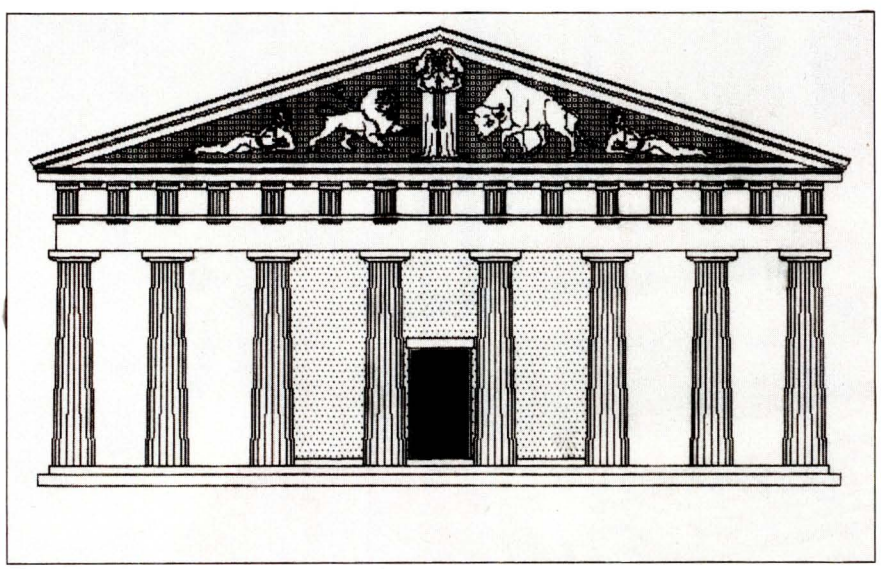

Figure 4a: A *temple. The figures on the pediment are reduced versions of figures from* McPic.

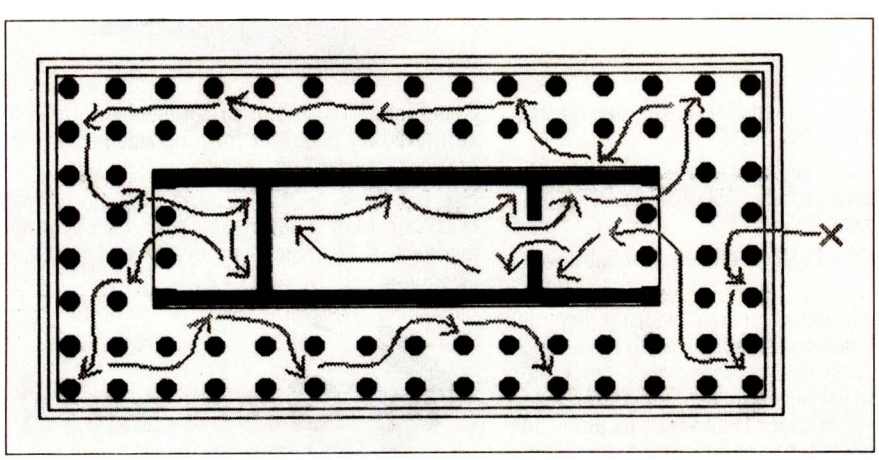

Figure 4b: A *set of loci associated, in this case, with a temple serves as a memory map.*

Just how this works we don't know. Given our current knowledge of the brain, we can speculate that loci are established in the visual hemisphere while the words being memorized are stored in the verbal hemisphere. The visual brain is used to index and retrieve the contents of the verbal brain. Instead of assigning memory locations numerical values, as in a computer, they are given pictorial values. But the basic principle is the same—one part of a complex information system is being used to index and retrieve the contents of the other.

The art of memory isn't as important to us as it was to the ancient Greeks and Romans. We have books, typewriters, and word processors (teleprompters too). But the *integration* of visual and verbal information is important to us. A well-illustrated article is easier to understand and recall because the mind has more material to work with, more external support. Good illustrations help you conjure up your own images and diagrams, making it easier to understand and absorb the material.

We all know that a picture is worth a thousand words and that there are many things that require pictures, diagrams, charts, graphs, etc., to be understood. And yet we still think of visuals as illustrating the text, when it is often the other way around. College courses in technical communication generally have a section or two on graphics but they are mostly about tables, graphs, and charts. Very little is said about pictures (whether photographs or line drawings) except that they are important and perhaps even essential.

What kind of pictures do you need?

(continued)

A NOTED AUTHORITY SPEAKS OUT ON DATABASE MANAGEMENT.

"I've got 4 billion customers.

"The world's biggest database.

"So I need all the power I can get my hands on.

"That's why I use R:base.™

"With R:base, I can access billions of records. Open 40 files at the same time. Handle up to 400 fields. And sort it all out in a hurry. It's everything I need to keep my lists in order.

"And if your inventory is anything like mine, you'll appreciate the programming capability of R:base. It lets me do conditional processing. Post transactions. And update multiple files from one input form.

"But even with all that power, the real gift is that it's so easy to use.

"For starters, its on-screen tutorial makes R:base a snap to learn. And now, there's a new applications diskette with ready-to-use mailing list, inventory management, and forecasting applications.

"Not only that, R:base is designed to work with Clout.™ That's the program that lets me—and my elves—talk to our personal computers in plain English. Clout also remembers where my data is stored, and can search for it across all files. So I don't have to!

"And here's the best package of all.

"For only $14.95 (plus shipping), Microrim will send you a demo/tutorial packet of both R:base and Clout. Just call 1-800-547-4000, Dept. 935. In Oregon, call 1-503-684-3000. Or see your nearest software store now.

"Because if your workload starts to snowball, you could end up out in the cold!"



R:BASE™ FROM MICRORIM®

Requires 256K of memory. Runs on MS-DOS and PC/DOS operating systems. CP/M-80 requires 64K.

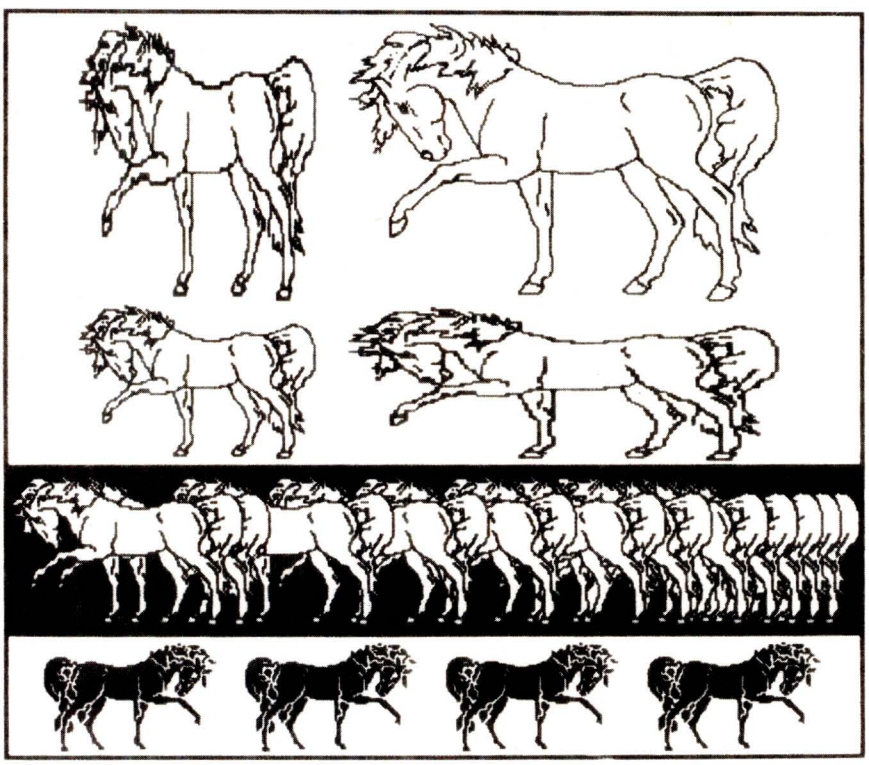

Figure 5: *Variations on a horse. The original in the upper right is preprogrammed on* McPic. *The variations were created using* MacPaint *to shorten, reduce, elongate, multiply, and reverse the image.*

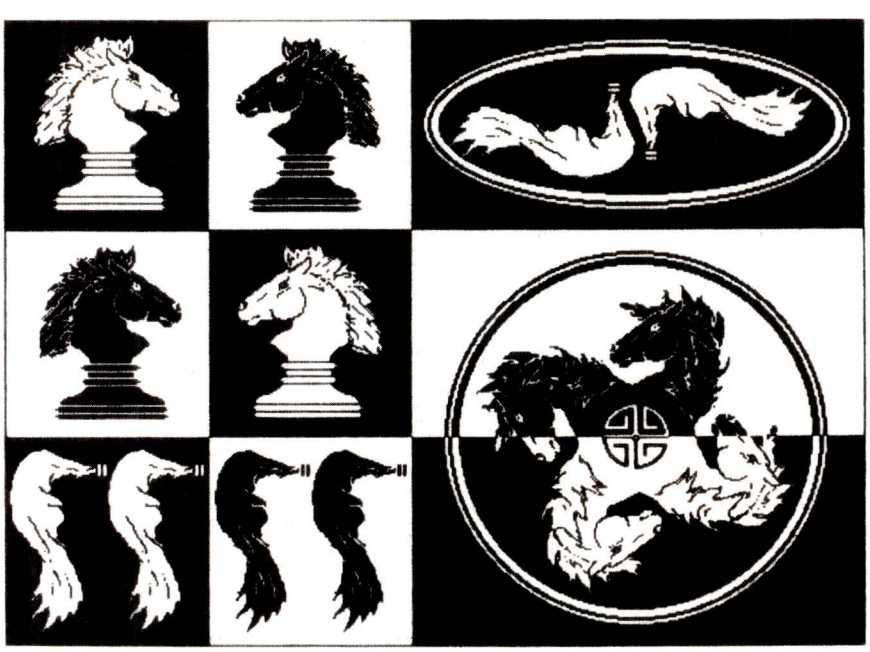

Figure 6: *Various uses of parts of the horse from figure* 5. *MacPaint was used to create these modifications.*

What makes them effective? When do you need them? Usually, we are taught little about using pictures and diagrams to illustrate abstract concepts (such as using the ambiguous vase/faces diagram to clarify Kuhn's concept of the relationship between scientific theory and observation). Some people know, intuitively, what sorts of pictures are good and effective, but explaining that knowledge to others is difficult. And the only people who seem to be able to depict abstract ideas are illustrators for such magazines as *Scientific American*, who have to figure out, among other things, how to make two-dimensional representations of *n*-dimensional spaces.

The main problem is that writing and illustrating are thought of as two different tasks. Some people specialize in writing, others in illustrating—but few become adept at both. Yet both images and verbal propositions are essential to thinking. This particular division of labor, in part, is caused by the difficulty of making good pictures; few people are adept at it. This brings us back to the Macintosh because its graphics capabilities can help bridge the gap.

Reconstructing Visual Images

The Macintosh isn't going to make you an artist if you can't draw a recognizable horse, but if you can use an image someone else has already prepared, perhaps you don't need to be an artist. The horse in the upper right-hand corner of figure 5 comes from McPic, one of the various disks of images that is available for the Macintosh. The other images were derived from the original horse in obvious and simple ways using tools from MacPaint.

In figure 6 the head and tail of the horse were cut away from the body, modified slightly (the mane was changed for the chessman, the left rear leg was removed from the tail), and treated as abstract design elements. In other words, the images are used as lines and shapes in a visual

(*continued*)

WHAT THEY CALL A PORTABLE, WE CALL A LOAD.



Sharp Electronics Corp., 10 Sharp Plaza, Paramus, NJ 07652

Today, almost everyone claims to have a portable computer. The problem is, almost no one does. Most portables have a separate data storage device, separate printer, separate modem, and some even require a separate monitor or bulky battery pack that can make them a liability on the road.

The Sharp PC-5000, on the other hand, is a true portable. It's a compact 16 bit microprocessor, 128K RAM (expandable to 320K) with 192K of ROM, an 80 character display screen, removable bubble memory storage, built-in rechargeable power source and bundled software. It's also available with options like an integrated modem that lets you connect with your mainframe and an integrated correspondence-quality printer which doesn't increase the size of the system. And even with all these features, the PC-5000 fits neatly into a briefcase and weighs under 14 pounds. Almost 25% less than its nearest major competitor. At a price that's lighter, too.

Of course, there's one thing about the PC-5000 that isn't small. Its working capacity. It functions as a desktop computer. And is compatible with a wide variety of MS-DOS® software.

So if you need a truly portable computer, look into the Sharp PC-5000. The one that may be the smallest, lightest—and the best value for the money. In short, a computer that will lighten your work load. Not add to it.

For more information call 1-800-BE-SHARP or fill in the coupon.

MS-DOS® is a registered trademark of Microsoft Corporation.

SHARP

FROM SHARP MINDS COME SHARP PRODUCTS

Sharp Electronic Corp. DEPT-SYS-BYTE-1-5
Computer Systems Division
1909 E. Cornell, Peoria, IL 61614

☐ Please send me more information about Sharp's PC-5000.

☐ Please set up a demonstration.

Name_____

Title_____

Company_____

Street_____

City_____ State_____ Zip_____

Phone ( )_____

A/V EQUIPMENT, AUDIO, BANKING SYSTEMS, CALCULATORS, CASH REGISTERS, COMPUTERS, COPIERS, ELECTRONIC TYPEWRITERS, FACSIMILE EQUIPMENT, MICROWAVE OVENS, PROFESSIONAL VIDEO CAMERAS & MONITORS, TELEVISIONS, VIDEO TAPE RECORDERS.

Inquiry 316

composition and their abstract qualities as lines and shapes are more important than the fact that they represent parts of a horse. These manipulations are easy to do in MacPaint. And once you start doing them you are on the way to developing your own drawing skills.

To draw well, you must learn to see the visual world in terms of lines and shapes, not simply in terms of objects; you must draw what your eye sees, not what your mind makes of what your eye sees (reference 10). Consider the nature of perspective drawing. In figure 7a, which shows the view looking up a temple column, your mind knows that the columns are only slightly tapered. But that is not what your eye sees from this point of view. Figure 7b shows the forms the columns present to your eye from this particular point of view. The trick is to get your drawing hand to override what your mind knows in favor of what your eye sees.

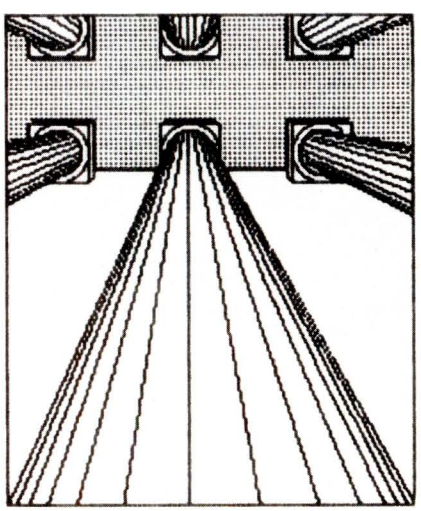

Figure 7a: *The view looking up a temple column. Note the intense foreshortening.*

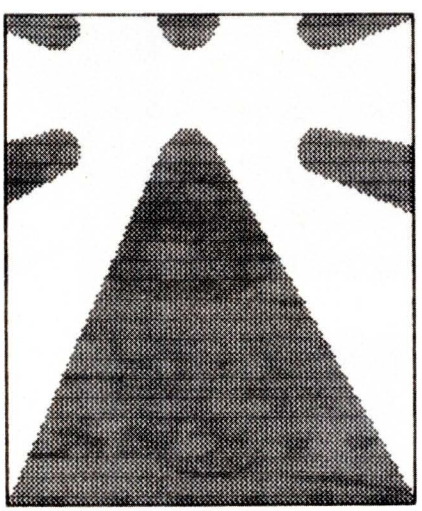

Figure 7b: *This shows the basic forms presented in figure 7a.*

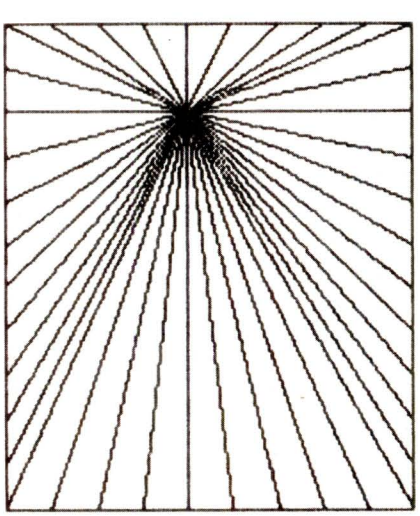

Figure 7c: *The vanishing point of the example in figure 7a.*

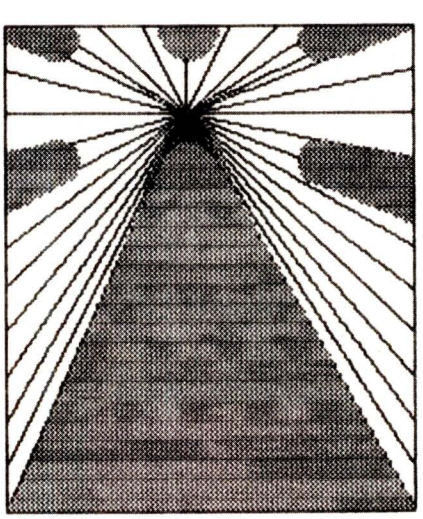

Figure 7d: *The basic column forms from figure 7b superimposed on the perspective grid given in figure 7c.*

Your drawing hand must override what your mind knows in favor of what your eye sees.

The best way to learn perspective drawing is to study the tricks developed during the Renaissance. Figure 7c shows a bunch of lines radiating from the vanishing point (the point on the visual horizon where your gaze is focused). All lines in the image space that are perpendicular to the picture plane pass through the vanishing point. Figure 7d shows the forms of the columns superimposed on the perspective grid. By using an explicitly constructed perspective grid, you can overcome what your mind knows and, instead, draw what your eye sees.

The techniques of perspective drawing didn't just happen. They were painstakingly created over a period of centuries ending about 400 years ago. And they were created at the same time that projective geometry was being developed—in some cases by the same people (see reference 11). Thus, artists used projective geometry to help them reconstruct three-dimensional images on the two-dimensional space of the picture plane. The mental process involved in drawing is quite different from that in which the mind comprehends what the eye sees. To draw a picture of an object you must reconstruct what your eye will see in terms of hand and pencil motions (see reference 12). By making it easy to treat pregenerated images as abstract design elements, the Macintosh starts you along the road to this reconstruction. The essential first step is to see lines and forms, not objects. When you play with MacPaint it is quite clear that you are manipulating lines and forms, and that you are dealing with purely visual objects, not just representations of cars, horses, trees, buildings, etc.

(continued)

Introducing SYSTAT 2

"The System for Statistics"

A comprehensive statistics, graphics, and database management package.

Version 2 provides these expanded capabilities:

- Full screen spreadsheet data editor
- Missing data, indexed arrays, character variables
- Unlimited cases, variable record lengths
- Higher accuracy than popular mainframe statistical packages
- Relational database management and report generation
- Sort large files on one or more numeric and/or character variables
- Merge large files by multiple numeric and character variables
- Unlimited numeric and character transformations (if...then...else, for...next, go to)
- Transpose files
- Interactive or batch (macros)
- Pass data to and from mainframe and micro-spreadsheets, databases, and word processors
- Input rectangular (cases by variables) or triangular (e.g. correlation matrix) files

SYSTAT is a trademark of Systat, Inc.
MS-DOS is a trademark of Microsoft.
CP/M is a trademark of Digital Research, Inc.
Z-80 is a trademark of Zilog.
HP9000 is a trademark of Hewlett-Packard.
VAX is a trademark of Digital Equipment Corp.

- Scatterplots, contour, function plots, histograms, stem-and-leaf, boxplots
- Quantile and detrended probability plots
- Basic statistics by one or more groups
- Save aggregate data into files for further processing
- Multi-way tables with log-linear model
- Pairwise/listwise missing value correlation, SSCP, covariance, Spearman, Kendall Tau-b
- Linear, polynomial, multiple, stepwise, weighted regression
- Extended regression diagnostics (residuals, autocorrelation, leverage, collinearity)
- Multivariate general linear model
- One-way Anova with post-hoc tests (Newman-Keuls, Duncan Multiple Range, Tukey HSD)
- N-way balanced or unbalanced, crossed or nested, ANOVA, ANOCOVA, MANOVA
- Univariate or multivariate repeated measures designs
- Principal components with rotations, plots and scores
- Linear and monotonic multidimensional scaling
- Cluster analysis (hierarchical, single-, average-, complete-linkage, cases, variables, two-way, K-means)
- Nonparametric statistics (Sign test, Wilcoxon, Kruskal-Wallis, Friedman two-way ANOVA, Mann-Whitney U, Kolmogorov-Smirnov one and two sample, Kendall coefficient of concordance)
- Time Series (smoothing, seasonal and nonseasonal Box-Jenkins ARIMA models, ACF, PACF, Cross Correlation Function, plots, transformations forecasting)

In every published review comparing it to other statistical microcomputer programs, Systat has been rated at the top of the list.

Single copy price, $495.

Site licenses and quantity prices available.

Available for MS-DOS, CP/M with a Z-80, HP9000 and VAX.

Call or write for detailed specifications and information.

SYSTAT, Inc.
603 Main Street
Evanston, IL 60202

312 **864.5670**

SYSTAT™

Introducing SYSTAT 2

"The System for Statistics"

A comprehensive statistics, graphics, and database management package.

Version 2 provides these expanded capabilities:

- Full screen spreadsheet data editor
- Missing data, indexed arrays, character variables
- Unlimited cases, variable record lengths
- Higher accuracy than popular mainframe statistical packages
- Relational database management and report generation
- Sort large files on one or more numeric and/or character variables
- Merge large files by multiple numeric and character variables
- Unlimited numeric and character transformations (if...then...else, for...next, go to)
- Transpose files
- Interactive or batch (macros)
- Pass data to and from mainframe and micro-spreadsheets, databases, and word processors
- Input rectangular (cases by variables) or triangular (e.g. correlation matrix) files

SYSTAT is a trademark of Systat, Inc.
MS-DOS is a trademark of Microsoft.
CP/M is a trademark of Digital Research, Inc.
Z-80 is a trademark of Zilog.
HP9000 is a trademark of Hewlett-Packard.
VAX is a trademark of Digital Equipment Corp.

- Scatterplots, contour, function plots, histograms, stem-and-leaf, boxplots
- Quantile and detrended probability plots
- Basic statistics by one or more groups
- Save aggregate data into files for further processing
- Multi-way tables with log-linear model
- Pairwise/listwise missing value correlation, SSCP, covariance, Spearman, Kendall Tau-b
- Linear, polynomial, multiple, stepwise, weighted regression
- Extended regression diagnostics (residuals, autocorrelation, leverage, collinearity)
- Multivariate general linear model
- One-way Anova with post-hoc tests (Newman-Keuls, Duncan Multiple Range, Tukey HSD)
- N-way balanced or unbalanced, crossed or nested, ANOVA, ANOCOVA, MANOVA
- Univariate or multivariate repeated measures designs
- Principal components with rotations, plots and scores
- Linear and monotonic multidimensional scaling
- Cluster analysis (hierarchical, single-, average-, complete-linkage, cases, variables, two-way, K-means)
- Nonparametric statistics (Sign test, Wilcoxon, Kruskal-Wallis, Friedman two-way ANOVA, Mann-Whitney U, Kolmogorov-Smirnov one and two sample, Kendall coefficient of concordance)
- Time Series (smoothing, seasonal and nonseasonal Box-Jenkins ARIMA models, ACF, PACF, Cross Correlation Function, plots, transformations forecasting)

In every published review comparing it to other statistical microcomputer programs, Systat has been rated at the top of the list.

Single copy price, $495.

Site licenses and quantity prices available.

Available for MS-DOS, CP/M with a Z-80, HP9000 and VAX.

Call or write for detailed specifications and information.

SYSTAT, Inc.
603 Main Street
Evanston, IL 60202

312 **864.5670**

SYSTAT™

To generate a circle with a compass, you select the center point and rotate a radius around it. To generate the circle with MacPaint, you select a point to be the corner of an invisible square in which the circle will be inscribed and drag the mouse diagonally across to the opposite corner. In the compass and straightedge method, the center plays an important role. With MacPaint, it does not. The world of MacPaint is different from the world of compass-and-straightedge geometry; hence an act of reconstruction is required if you wish to mimic compass-and-straightedge geometry in MacPaint.

Listing 2 shows a bit of Logo code that constructs an equilateral triangle. The meaning of the code is not important here. What is important is that it is clearly propositional. The compass-and-straightedge method and MacPaint are visual—more exactly, visuo-kinetic. But computer code is clearly propositional. A computer language, though quite different from a natural language, is verbal and, therefore, is in some sense a propositional reconstruction of a visual object.

Simple geometrical figures are not particularly exciting, but consider moiré patterns (figure 8). You can easily construct them with MacPaint. And once you've spent a day or two playing around with them, you'll want to write short programs to generate them. Drawing all those lines is easy enough, but it's tedious: why not let the computer do it? But to do that you have to learn to program the computer, to make propositional reconstructions of visual objects.

Years ago Alan Kay said that working in a visual computing environment provides a natural incentive for learning to program (reference 13). The graphics power that makes the Macintosh so user friendly also provides an incentive for users to learn enough about programming so that they no longer need that user friendliness. But it is MacPaint that provides this incentive, not the icon-based interface. It is possible that Apple's efforts to produce a computer for people who know nothing about programming (and don't want to learn) may well inspire an increase in the number of such users who *do* learn to program.

Working in a visual computing environment provides a natural incentive for learning to program.

Perhaps we need a revised conception of user friendliness. A user-friendly computer should not be one that lets you use it despite your ignorance; it should provide you with an incentive for learning how to program it. The Macintosh meets this criterion.

Listing 2: *Constructing an equilateral triangle in Logo. The four lines of code at the top specify a procedure for drawing polygons. The procedure has two parameters, the length of a side (size) and the angle through which the Logo turtle must turn to move from drawing one side to drawing the next side. The line at the bottom specifies a side of 74 units and an angle of 120 degrees.*

```
TO POLY :SIZE :ANGLE
FORWARD :SIZE
RIGHT :ANGLE
POLY :SIZE :ANGLE

POLY 74 120
```

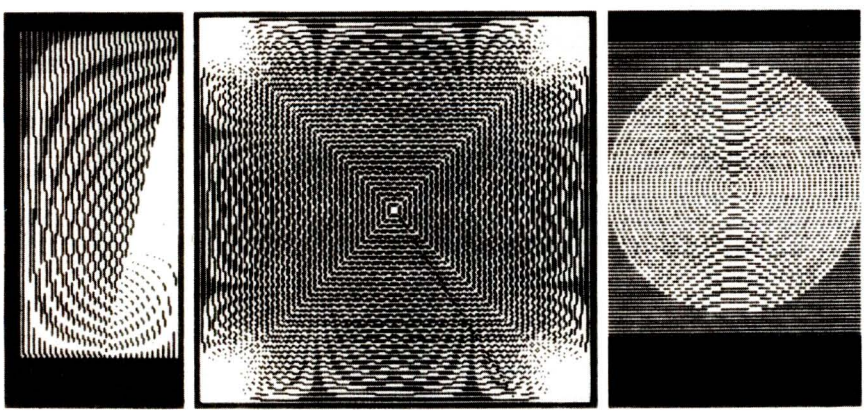

Figure 8: *Various moiré patterns created on the Macintosh with MacPaint.*

THE MACINTOSH EMERGES

By now I hope it's obvious that I am attempting to produce a gestalt switch in the way we think about the Macintosh. In terms of figure 2 it was designed as an ambiguous figure and marketed as two men staring at each other. I suggested that we look at it as a flower-filled vase. If you consider personal computers, some are business machines, some home machines, and some are both.

Business machines are used for word processing, accounting, financial modeling, inventory control, etc., and, if you allow for the necessary peripherals and software, they are likely to cost between $3000 and $20,000. They will probably have a 16-bit microprocessor (or perhaps 32-bit), 128K to 512K bytes of RAM (random-access read/write memory), a hard disk, and compilers or interpreters for

(continued)

What every Apple owner should know about

WORD JUGGLER.™



If you own an Apple IIe or IIc—or you're planning to buy one—here are a few things you should know about Quark's Word Juggler word processor.

First of all, Word Juggler is the only word processor that gives you a powerful spelling checker *and* a built-in telecommunications feature. So you can create a document—check it for spelling errors—and then send it via electronic mail. All with just one program.

Plus, Word Juggler is the most easy-to-use, professional word processor you can buy for your Apple. Virtually every function—even complicated "cut-and-paste" tasks—can be accomplished with a single keystroke.

There's nothing to memorize, either. Because Word Juggler comes with replacement keycaps—and a special keyboard template—which identify principal editing and formatting commands. So you can focus your efforts on using the program, not learning it.

Fact is, no other word processor for your Apple IIe or IIc gives you this unique combination of power, functionality and ease of use. And if all these advantages aren't compelling enough, check the price. Suggested retail is only $189.

So visit your favorite dealer today. Ask for a complete demonstration—and for a copy of our brochure, "What Every Apple Owner Should Know About Word Juggler." If you don't have a favorite dealer, but would like one, just call 1 (800) 543-7711. We'll fix you up.

Quark™ INCORPORATED

2525 West Evans, Suite 220
Denver CO 80219

Inquiry 291

Quark and Word Juggler are trademarks of Quark Incorporated. Apple is a registered trademark of Apple Computer, Inc.

Ask about our specially-priced educational version.

Copyright 1985, Quark Incorporated

Photography by Barbara Kasten

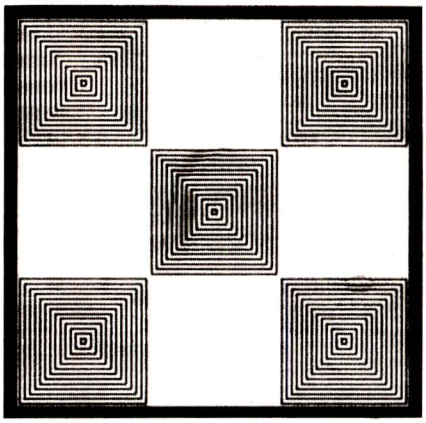

Figure 9a: *This drawing represents the various niches that make up the personal computer marketplace.*

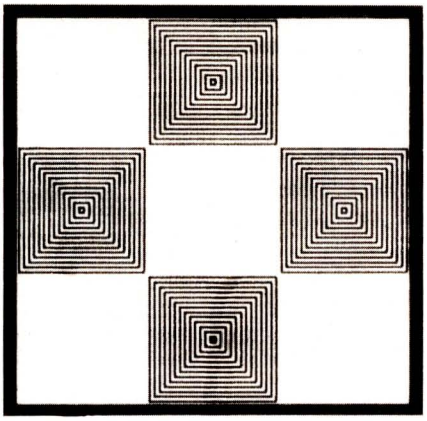

Figure 9b: *Imagine that these are the various computers destined to fill the niches in figure 9a.*

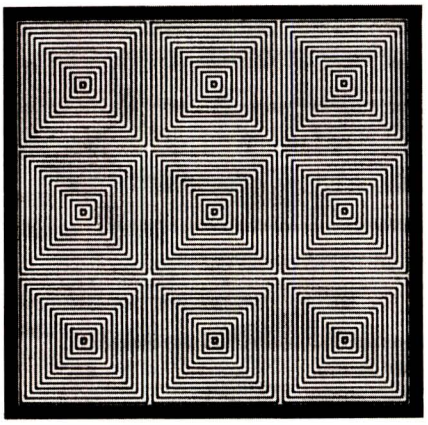

Figure 9c: *This represents the personal computer marketplace; the square holes, the interaction between the niches in figure 9a and the computers in figure 9b. Notice that this interaction creates patterns of diamonds that don't exist in either of the constituent patterns when considered separately. These are called emergent patterns.*

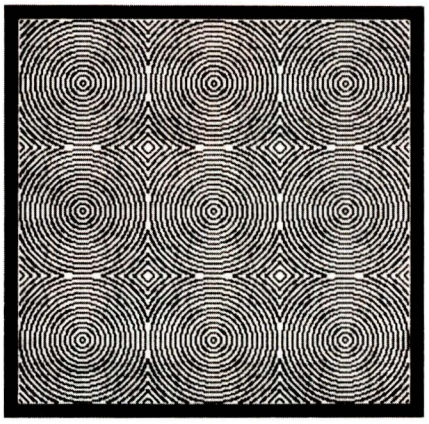

Figure 9d: *The differently patterned Macintosh—the round peg.*

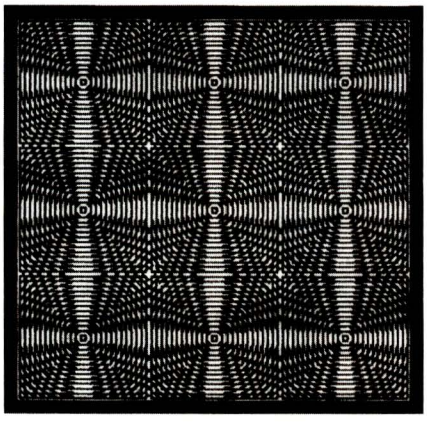

Figure 9e: *When you combine the round peg (figure 9d) with the square hole (figure 9c), something genuinely new emerges—jazzy squares.*

various programming languages.

Machines for home use tend to be much smaller. They cost between $300 and $1500 and use a color TV as a monitor. Mass storage is often a tape cartridge. These machines may run the same types of applications as their business-like siblings and in the same languages, but they are more likely to be used for video games and educational programs for the kids.

Figures 9a through 9c contain an abstract representation of the personal computer marketplace. There are certain niches (figure 9a) for all these machines (figure 9b) and they fit perfectly (figure 9c). Those who use microcomputers are generally doing well in their businesses and their kids have a ticket to the future. Those who manufacture and sell the machines are getting rich. When you put the two together, diamonds result from the interaction of two patterns, neither of which contains diamonds. The diamonds are an emergent pattern.

Consider the Macintosh, a differently patterned machine that doesn't fit into this picture at all (figure 9d). It doesn't yet have the power necessary for business computing. It is a lot of fun to use, but it is expensive for home users. And yet it is selling well. Who is buying these machines and what are they doing with them? If you combine this differently patterned machine (figure 9d) with the world of personal computing (figure 9c), you will find a new pattern—jazzy squares (figure 9e). Something genuinely new has emerged out of the interaction.

The Macintosh doesn't fit into any of the current categories of personal computing. It is designed, marketed, and reviewed (for the most part) as one more personal computer that does the standard things that personal computers do. The differences are: it has this easy-to-use icon-based interface; you don't really need a manual, just turn it on and start "mousing" around; and there is this program called MacPaint that's fun to use.

People like to draw, and working with MacPaint is fun. It gives you a

(continued)



552 words per minute. Letter perfect.

Humanly impossible, yes. NEC impossible, no. In fact, in a head-to-head comparison with letter-quality printers, the NEC PC-PR103A Letter-Perfect Printer not only prints three times faster (46 CPS), it gives you letter-quality performance, with true decenders. It's nearly impossible to tell the difference between print-outs from the PC-PR103A and letter-quality printers.

But that's not all. With the innovative Impact Line-Dot type Printhead, the NEC PC-PR103A tri-mode underscores its advantages by offering two additional printing modes -- graphics and draft quality. It even eliminates 'ghosting' with single-pass printing, and includes tractor feed.

Best of all it costs much less.

Near Letter-Quality: 46 CPS
Draft-Quality: 110 CPS
and Graphics

$499



There really is no comparison after all.



Other high-quality NEC printers include the 8027 Transportable Printers and 8025 Wide-Carriage.

NEC®

NEC Home Electronics (U.S.A.) Inc.
Personal Computer Division
1401 Estes Avenue
Elk Grove Village, IL 60007

Inquiry 254

NEC Corporation
Tokyo, Japan

PR103A

Inquiry 369

SEEKER!



Multifunction Products for the TI Professional Computers

SEEKER S1 BOARD
- Expandable memory from 0 to 512K bytes, fully socketed
- SCSI/SASI interface
- RS-232 Sync/Async port
- Optional clock
- Completely TI PC hardware and software compatible
- Plugs into any open TI PC expansion slot

SEEKER S2 BOARD
- RAM from 0K to 192K
- Fully TI compatible
- Will attach to SEEKER S1

INTERNAL WINCHESTER
Resides inside the Texas Instruments PC, interfaced to the SEEKER S1 board.
- 10 & 20 Megabyte
- TI software compatible
- Includes bootstrap EPROM
- Format and test routines included

EXTERNAL WINCHESTERS
Cables to SEEKER S1
- 10 & 20 Megabyte
- Cabinet matches TI PC
- 110/220 VAC operation

EXPANDABILITY
Western Automation SEEKER products allow TI Professional Computers to expand to their full 768K memory. The SEEKER S1 board will control eight SCSI/SASI Winchester disks and streaming tape drives, like the SEEKER 60MB streaming tape system.

SEEKER S1 board list $425
SEEKER S1 and 10 MB internal drive list $1895

Ninety day warranty on all products. Available through Dealers and OEMs.

WESTERN AUTOMATION LABORATORIES, INC.
5595 Arapahoe Road, Boulder, CO 80303

For Information write or call (303) 449-6400 or Toll Free (800) 227-4637

Put labels on your list.

Next time you shop for computer supplies, pick up a pack of Avery's new self-adhesive labels. By putting all your address lists on labels, you get more done in less time. Name badge labels, shipping labels, piggybacks and new clear labels are also available.

The labels are designed especially for micro computers. And they're packaged to fit neatly behind your printer. Look for them wherever you buy computer supplies.

Avery Label
An Avery International Company
Business Systems Division

Inquiry 34 for Dealers.
Inquiry 35 for End-Users.

MacPaint actively involves you with the computer. The Mac is easy to use—and it is fun.

much more active involvement with the computer than word processing or a spreadsheet program does. This involvement can lead you into programming. It can lead to deeper thinking and more effective communication. It is easy—and it is fun. ■

REFERENCES

1. Ornstein, Robert E., editor. *The Nature of Human Consciousness*. San Francisco, CA: W. H. Freeman and Company, 1973.
2. Hadamard, Jacques. *The Psychology of Invention in the Mathematical Field*. New York: Dover Publications, 1954, pages 142–143.
3. Watson, James D. *The Double-Helix*. New York: Atheneum Publishers, 1968.
4. Kuhn, Thomas S. *The Structure of Scientific Revolutions*. Chicago, IL: University of Chicago Press, 1962.
5. Simon, Herbert A. *The Sciences of the Artificial*. Cambridge, MA: MIT Press, 1981.
6. Sowa, John F. "Review of *Associative Networks-Representation and Use of Knowledge by Computers*." *American Journal of Computational Linguistics* (1980) 6, 110.
7. Buzan, Tony. *Use Both Sides of Your Brain*. New York: E. P. Dutton, 1983.
8. Rico, Gabriele Lusser. *Writing the Natural Way*. Los Angeles, CA: J. P. Tarcher Inc., 1983.
9. Norman, Donald A. *Memory and Attention*. New York: John Wiley and Sons, 1969.
10. Gombrich, Ernst. *Art and Illusion*. Princeton, NJ: Princeton University Press, 1969.
11. Ivins, William M. Jr. *Art and Geometry*. New York: Dover Publications, 1964.
12. Benzon, William L. "System and Observer in Semiotic Modeling," in Michael Herzfeld and Margot D. Lenhart, comp. *Semiotics 1980*. New York: Plenum Press, 1982, pages 27–36.
13. Kay, Alan C. "Microelectronics and the Personal Computer" in *Microelectronics*. San Francisco, CA: W. H. Freeman and Company, 1977.

THE PANASONIC® SR. PARTNER™ NO PERIPHERALS NEEDED

Because they're already built-in. The 80/132-column printer. The 9-inch, high-resolution display. There's even a built-in 360K disk drive. Which all make the Sr. Partner a complete computer as is.

The Sr. Partner is IBM hardware and software compatible so you can run popular business programs immediately. The software bundle currently offered with the Sr. Partner is WordStar, VisiCalc, pfs:Graph, File, Report, MS-DOS 2.11 and GW BASIC.*

And with its 256K internal memory expandable to 512K, the Sr. Partner can run the new integrated software.

Built-ins also include expansion slots and parallel and serial I/O ports. There's even a built-in RGB monitor port so you can take advantage of the Sr. Partner's color and graphics capability.

If you want 10 megabytes of storage, choose the new hard disk Sr. Partner.

Both the Sr. Partner and the hard disk Sr. Partner come with an exceptional Panasonic warranty.**

For the dealers nearest you, call: 201-392-4261. The Panasonic Sr. Partner. No peripherals needed. It makes the competition look like Jr. Executives.

Panasonic
Industrial Company

Inquiry 270

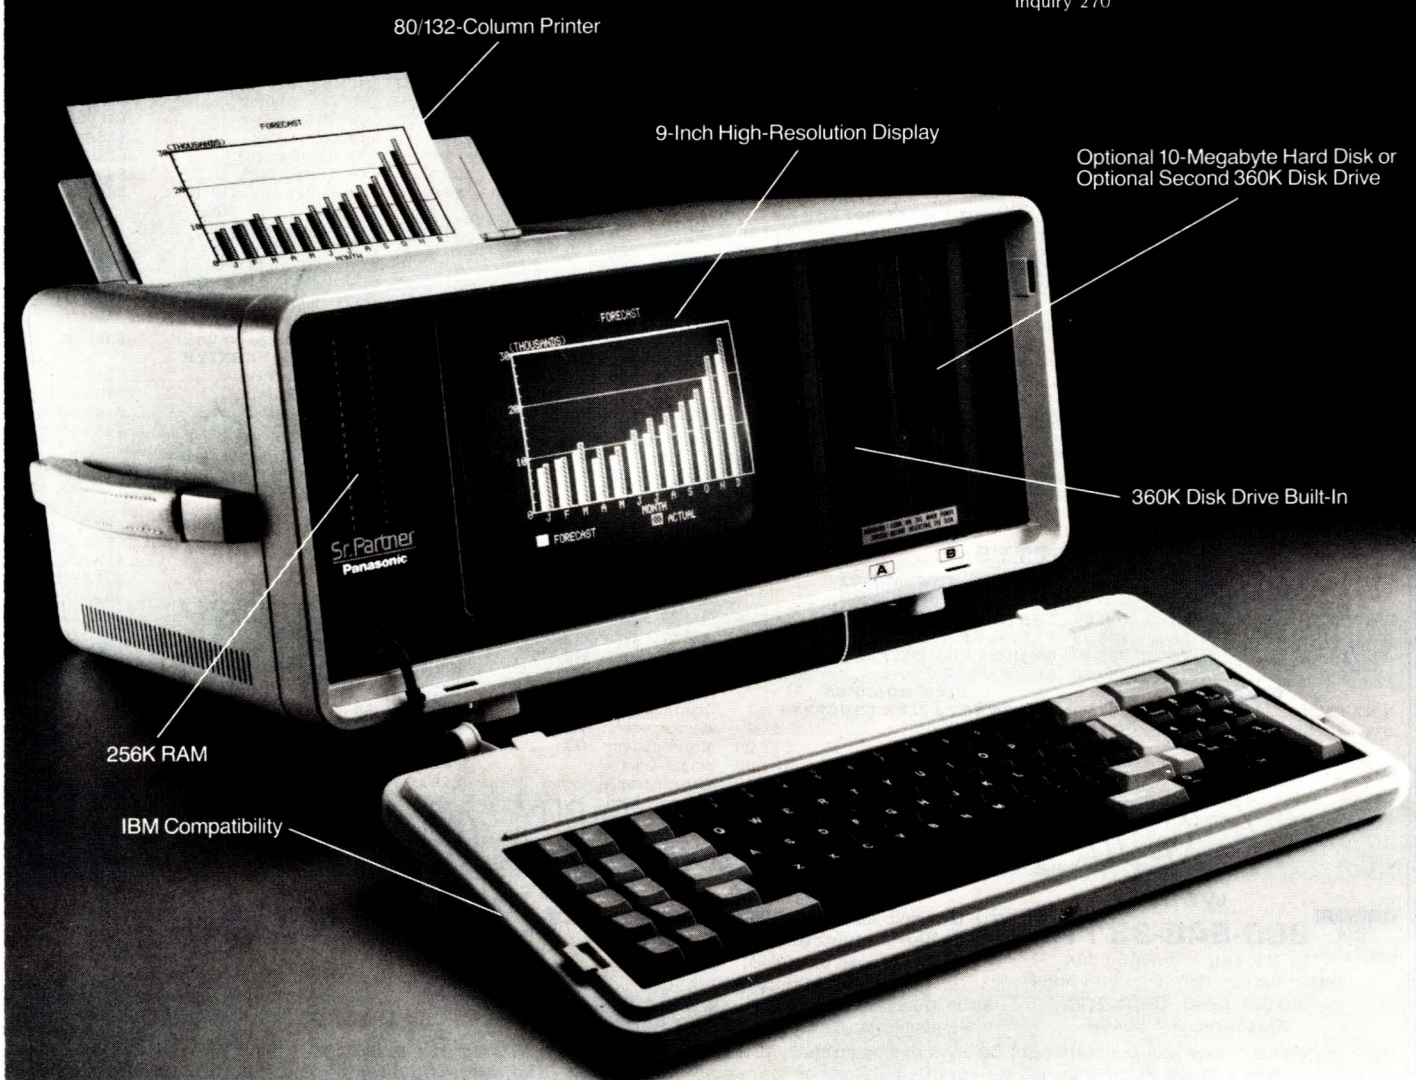

*Software bundle offer subject to change or withdrawal at any time without notice. **One-year limited warranty, 6 months on thermal printer head. Carry-in or mail-in service.

Sr. Partner is a trademark of Matsushita Electric Industrial Company Ltd; WordStar is the trademark of MicroPro International Corporation; VisiCalc is the registered trademark of VisiCorp (Software Arts, Inc.); pfs:Graph, File, Report are the registered trademarks of Software Publishing Corporation; GW BASIC, MS-DOS are the trademarks of Microsoft Corporation.

IT ALL ADDS UP...

IBM SYSTEMS

Starting as low as

$1399

64K, 1-DS/DD DRIVE KEYBOARD



SANYO



PC COMPATIBLES

ZENITH

PC-150 Desktop	CALL
PC-160 Portable	CALL

COLUMBIA

Desktops	CALL
Portables	CALL

SANYO

MCB 550	$699.00
MBC 550-2	$749.00
MBC 555	$949.00
MBC 555-2	$1099.00

CORONA

Desktops	CALL
Portables	CALL

NEC PRINTERS

NEC 2050	$639.00
NEC 3550	$1399.00
NEC 8850	$1749.00

TANDON

5¼" 320K Floppy	$169.00

VISICORP

VisiCalc IV	$159.00

IDEAdisk

5MB to 45MB Hard drives with removable Cartridge back up as low as $1299.00

AST RESEARCH

Six Pak Plus...from	$249.00
Mega Plus...from	$299.00
I/O Plus...from	$139.00

QUADRAM

New Quadboard...as low as	$249.00
Quadlink 64K	$479.00
Quadboard II...as low as	$249.00
Quad 512 Plus...as low as	$259.00
Quadcolor I	$209.00
Chronograph	$89.99
Parallel Interface Board	$79.99
64K RAM Chips Kit	$29.99

PARADISE

Multi-Display Card	$339.00
Modular Graphics Card	$319.00

SPI

Open Access	$339.00

HARVARD

Harvard Project Manager	$299.00

PFS

IBM/APPLE

Write	$89.99
Graph	$89.99
Report	$79.99
File	$89.99
Plan	$89.99

ELECTRONIC ARTS

Get Organized	$139.00

LOTUS

Symphony	$469.00
1-2-3	$309.00

HAYES

Please (Data Base)	$269.00

MAI

General Ledger, Payroll, Inventory, Accounts Payable/Receivable....CALL

MICROPRO

WordStar Professional Pack	$279.00

MICROMIM

R:Base 4000	$279.00

MULTIMATE INT.

Multi Mate	$289.00

MICROSTUF

Crosstalk	$105.00

MICROSOFT

MultiPlan	$139.00

ASHTON-TATE

Framework	$379.00
dBASE II...upgrade	$139.00
dBASE II	$299.00
dBASE III	$389.00
Friday!	$179.00

IUS

EasyWriter II	$249.00
EasySpeller	$119.00
EasyFiler	$229.00

CONTINENTAL SOFTWARE

1st Class Mail/Form Letter	$79.99
Home Accounting Plus	$88.99

PROFESSIONAL SOFTWARE

PC Plus/The Boss	$269.00

SYNAPSE

File Manager	$59.99

FOX & GELLER

dGraph	$139.00
Quick Code	$139.00
dUtil	$49.99
Grafox	$139.00

ALPHA SOFTWARE

Electronic Desk	$219.00

BORLAND

Turbo Pascal	$49.00

APPLE

APPLE IIe STARTER PACK

64K Apple IIe, Disk Drive & Controller, 80 Column Card, Monitor II & DOS 3.3 ..... CALL

APPLE IIe	CALL
APPLE IIc	CALL
MacINTOSH	CALL

MONITORS

AMDEK

300 Green	$129.00
300 Amber	$149.00
310 Amber IBM Plug	$169.00
Color 300/audio	$259.00
Color 500 Composite/RGB/VCR	$389.00
Color 600 Hi-Res (640 × 240)	$439.00
Color 700 Hi-Res (720 × 240)	$499.00
Color 710 Long Phosphor	$579.00

BMC

1201 Plus (12" Green Hi-Res)	$88.99
9191U Color	$229.00
9191 Color +	$249.00

NAP

12" Amber	$69.99

NEC

JB 1206 Green	$109.00
JB 1201 Green	$139.00
JB 1205 Amber	$149.00
JB 1215 Color	$249.00
JC 1216 RGB	$379.00
JC 1460 Color	$269.00

PRINCETON GRAPHICS

MAX-12 Amber	$199.00
HX-12 RGB	$489.00
SR-12 RGB	$629.00

SAKATA

SC-100 Color	$249.00
SG-1000 Green	$129.00
SA-1000 Amber	$139.00

TAXAN

100 12" Green	$125.00
121 IBM Green	$149.00
100 12" Amber	$135.00
122 IBM Amber	$159.00
210 Color RGB	$269.00
400 Med-Res RGB	$319.00
415 Hi-Res RGB	$439.00
420 Hi-Res RGB (IBM)	$469.00

USI

Pi 1, 9" Green	$99.99
Pi 2, 12" Green	$119.99
Pi 3, 12" Amber	$129.99
Pi 4, 9" Amber	$119.99
1400 Color	$249.99

QUADRAM

Quadchrome 8400 Color	$489.00

ZENITH

ZVM 122 Amber	$89.99
ZVM 123 Green	$84.99
ZVM 124-IBM Amber	$149.00
ZVM 135-RGB/Color	$459.00

DISKETTES

maxell

5¼" MD-1	$19.99
5¼" MD-2	$29.99
8" FD-1	$39.99
8" FD-2	$49.99

VERBATIM

5¾" SS/DD	$21.99
5¼" DS/DD	$29.99

BIB

5¼" Disk Head Cleaner	$14.99

Dennison

Elephant 5¼" SS/SD	$15.99
Elephant 5¼" SS/DD	$17.99
Elephant 5¼" DS/DD	$24.99
Elephant EMSP 5¼	$34.99

DISK HOLDERS

INNOVATIVE CONCEPTS

Flip-in-File 10	$3.99
Flip-in-File 50	$17.99
Flip-in-File 50 w/lock	$24.99
Flip-in-File (400/800 ROM)	$17.99

MODEMS

ANCHOR

Volksmodem	$59.99
Mark IL Serial	$79.99
Mark VII (Auto Ans/Auto Dial)	$99.99
Mark XII (1200 Baud)	$259.00
Mark TRS-80	$99.99
9 Volt Power Supply	$9.99

HAYES

Smartmodem 300	$199.00
Smartmodem 1200	$479.00
Smartmodem 1200B	$399.00
Micromodem IIe	$269.00
Micromodem 100	$299.00
Smart Com II	$75.99
Chronograph	$199.00

NOVATION

J-Cat	$99.99
Cat	$139.00
Smart Cat 103	$179.00
Smart Cat 103/212	$399.00
AutoCat	$219.00
212 AutoCat	$549.00
Apple Cat II	$249.00
212 Apple Cat	$449.00
Apple Cat 212 Upgrade	$259.00
Smart Cat Plus	$339.00

ZENITH

ZT-1	$339.00
ZT-10	$309.00
ZT-11	$369.00

COMPUTER MAIL ORDER

west

VISA **800-648-3311**

In NV call (702)588-5654

Order Status Number: 588-5654

P.O.Box 6689, **Dept.100**

Stateline, NV 89449

canada

AMERICAN EXPRESS

Ontario/Quebec 800-268-3974

Other Provinces800-268-4559

In Toronto call (416) 828-0866

Telex: 06-218960

2505 Dunwin Drive, Unit 3B, **Dept.100**

Mississauga, Ontario, Canada L5L1T1

east

DINERS CLUB

800-233-8950

MasterCard

In PA call (717)327-9575

Order Status Number: 327-9576

Customer Service Number: 327-1450

477 E. 3rd St., **Dept.100,** Williamsport, PA 17701

Open purchase orders accepted with net 30 days terms, subject to credit approval. Next day shipping on all stock items. No risk, no deposit on C.O.D. orders and no waiting period for certified checks or money orders. Add 3% (minimum $5) shipping and handling on all orders. Larger shipments may require additional charges. NV and PA residents add sales tax. All items subject to availability and price change. Call today for our catalog.

...THE BEST PRICES



PRINTERS

AXIOM

AT-100 Atari Interface Printer	$169.00
AT-550 Atari Bidirectional	$259.00
GP-100 Parallel Interface	$189.00
GP-700 Atari Color Printer	$489.00
GP-550 Parallel Printer	$269.00

BMC

401 Letter Quality	$589.00
BX-80 Dot Matrix	$239.00
BX-100 Dot Matrix	$259.00

C.ITOH

Prowriter 8510P	$339.00
Prowriter 1550P	$569.00
A10 (18 cps) Son of Starwriter	$479.00
Hot Dot Matrix	CALL
F10-40 Starwriter	$949.00
F10-55 Printmaster	$1099.00

COMREX

ComWriterII Letter Quality	$449.00

DIABLO

620 Letter Quality	$749.00
630 API Letter Quality	$1549.00

DAISYWRITER

2000	$949.00

EPSON

RX-80, RX-80FT, RX-100	CALL
FX-80, FX-100	CALL
LQ 1500, JX80 Color	CALL

JUKI

6100	$449.00
6300	$779.00

MANNESMAN TALLY

160L	$589.00
180L	$749.00
Spirit 80	$259.00

NEC

2010/15/30	$719.00
3510/15/30	$1299.00
7710/15/30	$1699.00
8027	$349.00

OKIDATA

82, 83, 84, 92, 93, 2350, 2410	CALL
Okimate-64	$209.00
Okimate-Atari	$209.00

OLYMPIA

Compact 2	$469.00
Compact RO	$499.00
Needlepoint Dot Matrix	$329.00

PANASONIC

1090	$239.00
1091	$309.00
1092	$449.00
1093	$649.00

SMITH CORONA

TP-1000	$449.00
Tractor Feed	$119.00

SILVER REED

400 Letter Quality	$279.00
500 Letter Quality	$349.00
550 Letter Quality	$459.00
770 Letter Quality	$799.00

STAR

Gemini 10X	$259.00
Gemini 15X	$379.00
Radix 10	$549.00
Radix 15	$649.00
Powertype	$329.00

TOSHIBA

1340	$799.00
1351	$1369.00

INTERFACES

PRACTICAL PERIPHERALS

Graphcard	$84.99
Seriall Card	$109.00
Microbuffer II +	$179.00
Microbuffer 32K	$199.00

ORANGE MICRO

Grappler CD (C64)	$99.99
Grappler + (Apple)	$109.00
Grappler 16K + (Apple)	$189.00

QUADRAM

Microfazer - Printer Buffers starting at $139.00

We carry interfaces and cables for most computers on the market today. Call to determine your requirements.

HEWLETT PACKARD

41CV	**$189.99**
41CX	**$249.99**
HP 71B	**$419.99**
HP 11C	$62.99
HP 12C	$92.99
HP 15C	$92.99
HP 16C	$92.99
HP 75D	$999.99
HPIL Module	$98.99
HPIL Cassette or Printer	$359.99
Card Reader	$143.99
Extended Function Module	$63.99
Time Module	$63.99

We stock the full line of HP calculator products

KOALA

Atari (ROM)	$79.99
C-64	$79.99
IBM	$99.99
Apple/Franklin	$85.99

NEC

PC-8201 Portable Computer	**$299.00**
PC-8231 Disk Drive	$619.00
PC-8221A Thermal Printers	$149.00
PC-8281A Data Recorder	$99.99
PC-8201-06 8K RAM Chips	$105.00
PC-8206A 32K RAM Cartridge	$329.00

SHARP

PC-1350	**$159.99**
PC-1261	**$159.99**
PC-1260	**$109.99**
PC-1500A	**$165.99**
PC-1250A	**$88.99**
CE-125 Printer/Cassette	$128.99
CE-150 Color Printer Cassette	$171.99
CE-151 4K RAM	$29.99
CE-155 8K RAM	$49.99
CE-161 16K RAM	$134.99
CE-500 ROM Library ea	$29.99

HOME COMPUTERS

ATARI
A Warner Communications Company



CALL WHILE SUPPLIES LAST

600XL & 800XL

850 Interface	$109.00
1010 Recorder	$49.99
1020 Color Printer	$79.99
1025 Dot Matrix Printer	$199.99
1027 Letter Quality Printer	$269.99
1030 Direct Connect Modem	$59.99
1050 Disk Drive	$179.99
Touch Table/Software	$64.99
Light Pen/Software	$72.99
CX22 Track Ball	$39.9
7097 Atari Logo	$74.99
4018 Pilot (Home)	$57.99
405 Pilot (Educ.)	$99.99
8036 Atari Writer	$49.99
5049 VisiCalc	$59.99
CX30Paddles	$11.99
CX40 Joystick	$7.99
4011 Star Raiders	$12.99
4022 Pac Man	$16.99
4025 Defender	$32.99
8026 Dig Dug	$32.99
8031 Donkey Kong	$32.99
8034 Pole Position	$32.99
8040 Donkey Kong Jr.	$32.99
8043 Ms Pacman	$32.99
8044 Joust	$32.99
8045 Pengo	$16.99
8052 Moon Patrol	$32.99
4003 Assembler	$34.99
8126 Microsoft Basic I or II	$64.99

MEMORY BOARDS

Axlon 32K	$44.99
Axlon 48K	$69.99
Axlon 128K	$269.99
Microbits 64K (600)	$109.00

SWP

ATR-8000-16K Z80 CP/M	$349.00
ATR-8000-64K Z80 CP/M	$499.00

BIT 3

Full View 80	$239.00

DISK DRIVES

Indus GT Drive (Atari)	$279.00
Rana 1000	$249.00
Trak AT-D2	$389.00
Trak AT-D4	$539.00

MODEMS

Micro Bits MB-1100	$129.99

INTERFACES

Microbits MB-1150	$79.99

commodore

CBM 8032	**$639.00**
CBM 8096	$869.00
CBM 9000	$999.00
B128-80	$99.00
8032 to 9000 Upgrade	$499.00
2031 LP Disk Drive	$299.00
8050 Disk Drive	$999.00
8250 Disk Drive	$1249.00
4023 Printer	$329.00
8023 Printer	$589.00
6400 Printer	$1449.00
Z-RAM	$369.00
Silicon Office	$499.00
The Manager	$199.00

BATTERIES INCLUDED

PaperClip w/Spell Pack	$84.99
The Consultant DBMS	$69.99
Bus Card II	$149.00
80 Col Display	$149.00

DISK DRIVES

MSD SD1	$349.00
MSD SD2	$599.00
Indus GT/C64	$279.00

PERSONAL PERIPHERALS

Super Sketch Graphics Pad	$39.99

SX-64 Portable	**$749.00**
Commodore Plus 4	**$289.00**
CBM 64	**$199.00**
C1541 Disk Drive	$249.00
C1530 Datasette	$59.99
C1520 Color Printer/Plotter	$129.00
M-801 Dot Matrix Printer	$219.00
C1526 Dot Matrix/Serial	$299.00
C1702 Color Monitor	$259.00
C1600 VIC Modem	$59.99
C1650 Auto Modem	$89.99
Simons Basic	$29.99
MCS 801 Color Printer	$499.00
DPS 1101 Daisy Printer	$459.00

PFS

File (64)	$59.99
Report (64)	$59.99

PRECISION SOFTWARE

Superbase 64	$59.99

PROFESSIONAL SOFTWARE

Word Pro 2 Plus	$159.00
Word Pro 3 Plus	$189.00
Word Pro 4 Plus/5 Plus each	$239.00
Info Pro	$179.00
Administrator	$399.00
Power	$69.99
Word Pro 64 Plus	$59.99
Fleet System II	$59.99

COMPUTER MAIL ORDER

west

MasterCard **800-648-3311**

In NV call (702)588-5654

Order Status Number: 588-5654

P.O.Box 6689, **Dept.100**

Stateline, NV 89449

canada

DINERS CLUB

Ontario/Quebec 800-268-3974

Other Provinces800-268-4559

In Toronto call (416) 828-0866

Telex: 06-218960

2505 Dunwin Drive, Unit 3B, **Dept.100**

Mississauga, Ontario, Canada L5L1T1

east

AMERICAN EXPRESS

800-233-8950 VISA

In PA call (717)327-9575

Order Status Number: 327-9576

Customer Service Number: 327-1450

477E.3rdSt., **Dept.100,** Williamsport,PA 17701

CANADIAN ORDERS: All prices are subject to shipping, tax and currency fluctuations. Call for exact pricing in Canada. INTERNATIONAL ORDERS: All orders placed with U.S. offices for delivery outside the Continental United States must be pre-paid by certified check only. Include 3% (minimum $5) shipping and handling. EDUCATIONAL DISCOUNTS: Additional discounts are available to qualified Educational Institutions. APO & FPO: Add 3% (minimum $5) shipping and handling.

LOOK WHO BUYS SOFTWARE FROM US!

IBM • XEROX • NCR
CHEVRON • GTE • SPERRY
JFK SPACE CENTER • ARAMCO
AT&T • BENDIX • PRICE WATERHOUSE
HEWLETT PACKARD • GENERAL ELECTRIC
GENERAL DYNAMICS • TRW • KAISER CEMENT

If you order software from us, you're in good company. You see, some of our best customers are America's biggest corporations.

Maybe they're attracted by our low, low prices (big companies are price-conscious too!).

Or maybe when you're an "IBM", you're looking for something extra. Like the personal service, giant inventory, and in-depth technical support you'll find at 800-SOFTWARE.

You see, when you call us, we'll take care of you like our business depends on it. Because it does. Which means when you place an order, you can be sure we'll fill it promptly. And that our unique Order Tracking System™ is keeping tabs on your order every step of the way.

Most important, we'll be there if you need us after your software arrives. We'll make sure that you'll receive the finest technical support and customer service in the industry. And that's a promise. If you purchase in large quantities, you'll be delighted by the service our National Accounts Program provides.

Next time you're looking for low price and great service, do what IBM, General Electric, and a lot of other big companies do. Pick up the phone and give us a call.

We'll show you why some hard-headed companies buy their software from us.

CHECK OUT ALL OUR INCREDIBLE BUSINESS SOFTWARE PRICES:

Lotus 1-2-3 $309	dBase II/III $299/$379	Framework $379	WordStar 2000/2000 Plus $269/$329
Lotus Symphony $439	Crosstalk $105	SuperCalc 3 $209	Hayes Modems 1200/1200B $489/$409

AMDEK™	
Monitors	CALL
ASHTON-TATE™	
dBase II/III	$299/$379
Framework	$379
Friday!	$219
AST™ PRODUCTS	CALL
ATI™ & CDEX™ TRAINING	CALL
DIGITAL RESEARCH™	CALL
FOX & GELLER™	CALL
HAYES™	
Smartmodems 1200/1200B	$489/$409
All Other Products	CALL
HERCULES™	
Graphic Card	$325
IMSI™	
4-Point Graphics	$ 99
PC Paintbrush	$ 99
LIFETREE™	
Volkswriter Deluxe	$179
LOTUS™	
1-2-3	$309
Symphony	$439
MAXELL™ DISKETTES	CALL
MEMOREX™ DISKETTES	CALL
MICROPRO®	
WordStar 2000/2000 Plus	$269/$329
WordStar Pro Package/P.P. Plus	$259/$359
InfoStar	CALL
ChartStar	$239
TelMerge	$ 99
All Other Products	CALL
MICRORIM™	
RBase 4000	$289
MICROSOFT®	
Multiplan	$149
Word w/Mouse	$299
Fortran	$269
All Other Products	CALL
MICROSTUF™	
Crosstalk	$105
MULTIMATE™	$299
NORTON UTILITIES™	$ 59
QUADRAM™	CALL
ROSESOFT™	
Pro Key	$ 99
SOFTWARE PUBLISHERS™	
PFS: File/Graph/Write	$ 84
PFS: Report	$ 75
SORCIM/IUS™	
SuperCalc 2/3	$159/$209
EasyWriter II System	$185
IUS Easy Business Accounting	$299/mod.
All Other Products	CALL
WESTERN UNION EASY LINK®	FREE
PLUS MUCH, MUCH MORE!	CALL

WE ALSO CARRY HUNDREDS OF OTHER PRODUCTS!

VISA MasterCard AMERICAN EXPRESS

WRITE:
800-SOFTWARE, INC.
940 Dwight Way
Berkeley, CA 94710

Copyright 800 Software 1984
Microsoft is a registered trademark.

800-SOFTWARE

TO ORDER CALL TOLL FREE:
800-227-4587 or 415-644-3611

- Dealer inquiries welcome.
- Quantity discounts available through our National Accounts Program.
- Purchase orders accepted. Please call in advance.
- Call for shipping charges. Overnight delivery available.
- We do not add surcharge for credit card purchases.
- Prices may change. Above prices are for IBM-PC and compatibles.
- International orders welcome: TELEX #7515743800SOFTWARE UD Compuserve Key Word "GO-EH."
- Member of Direct Marketing Association and Better Business Bureau.

Inquiry 2

BY JOSEPH S. NADAN

A GLIMPSE INTO FUTURE TELEVISION

A technology evolving in parallel with personal computers

Editor's note: How will high-definition television (HDTV) open the window on the world for users of personal computers? This article presents the technical possibilities and describes a scenario for the evolution of television in the "information age." The author explains the relationship between HDTV and two-way interactive cable television (CATV). As envisioned, HDTV will have wider computer-type displays with increased resolution. This could support the preparation of larger spreadsheets using databases located both inside and outside the home. Shop-at-home services could benefit from "video facsimile," the ability to send a picture from one location to any other on a CATV system in about 1 second. We could see what we are interested in buying, rather than viewing simple graphical representations.

When used as an entertainment device, the future television receiver probably will be very different from that of today. The author discusses new features made possible by digital memory within the receiver. We'll be able to watch more than one program at once and use our personal computers while also watching, for example, one or more sporting events. Or we could shop interactively while watching a movie. When operated in high-definition mode, the larger and wider picture could enable the viewer to experience a theater-like presentation.

Color television has been in the American household for about 30 years. It is somewhat ironic that the television industry, the storehouse of creativity that has stimulated the development of VLSI (very-large-scale integration) digital video memories and significant improvements in rear-projection displays, is having so much difficulty in making the transition into the "information age." The cost, reliability, styling, and picture quality of color television have vastly improved over the years. However, color television still has its original display shape and one-way receive-only capabilities.

TELEVISION IMPROVEMENTS

The next generation of television receivers, in order to gain our acceptance, will most likely have

- a large display area with a wider aspect (width to height) ratio
- flexibility and interactivity
- approximately twice the perceived horizontal resolution and vertical resolution of NTSC (National Television System Committee) television
- true high-fidelity stereophonic sound (not discussed here)
- no artifacts (visible effects on the display; for example, shimmer and color flashing) that were not present in the original scene

Because of economic, social, and technical considerations, we at Philips Laboratories believe that the optimum maximum size of a consumer display will be about one-half square meter. While researchers still work toward very large flat-panel displays, it appears that vastly improved rear-projection displays are more imminently practicable. It is possible that in the next few years we will be able to purchase rear projectors that will have better subjective performance in normal room lighting than the 26-inch direct-view cathode-ray tubes (CRTs)

(continued)

Joseph S. Nadan (345 Scarborough Rd., Briarcliff Manor, NY 10510) is director of electronics and optical systems research for Philips Laboratories, a division of North American Philips Corporation.

that are in use today.

A second important display parameter is the aspect (width to height) ratio (see the glossary on page 151). To more closely match the aspect ratio of human vision (1.80:1) and to better match film material, which is predominantly 1.66:1 and 1.85:1, we suggest an aspect ratio of 5⅓:3 (or 1.78:1) in place of the standard 4:3 (see photo 1). We selected 5⅓:3 over 5:3 because it is more noticeably different than 4:3. (Note that 5:3 is a 25 percent increase in width over 4:3 while 5⅓:3 represents a 33 percent increase over 4:3.) It also supports new features made possible by digital memory in a television receiver.

Digital Memory

The availability of a low-cost digital memory within a television receiver makes possible new features, including both local- and network-level interactivity. (See the text box "Memory Technology for Digital-Feature Television" on page 148.) Digital signal processing within the receiver may be broadly classified into two categories: those that provide new features and those that replace existing analog signal processing at lower cost. Digital memory in the receiver falls into the first category and provides these new features: multiple-picture-in-picture (MPIP) display, single-picture-in-picture display, and frame storage (freeze-frame).

When first powered on, the new receiver could show 12 channels—that is, multiple pictures in one display (see photo 2)—to enable us to preview what is "on the cable." This display could also indicate the programming mix; that is, those programs available in an HDTV format could have a flashing contrasted dot as an indicator mark. By pressing one button on the remote-control unit, we could choose another set of favorite channels (which we have previously loaded into the receiver). After using an MPIP preview, we could select one or two programs to watch in real time (see photo 1b). For example, we might want to watch two sporting events simultaneously, switching the more interesting programming to the larger portion of the display almost instantaneously by pressing one button. We could also watch one main program while "clicking through" other programs on the smaller display area. We also will be able to store a picture in memory and retain it on the display for closer viewing later.

The 5⅓:3 aspect ratio is special in the respect that it synergistically relates to 4:3; in other words, one 5⅓:3 picture may be formed from one 4:3 picture and three smaller 4:3 pictures. These capabilities may be combined for great flexibility. For example, we could use our personal computers while watching three different broadcasts. Preparing a wide spreadsheet or any type of document that is horizontally oriented is also facilitated by this aspect ratio.

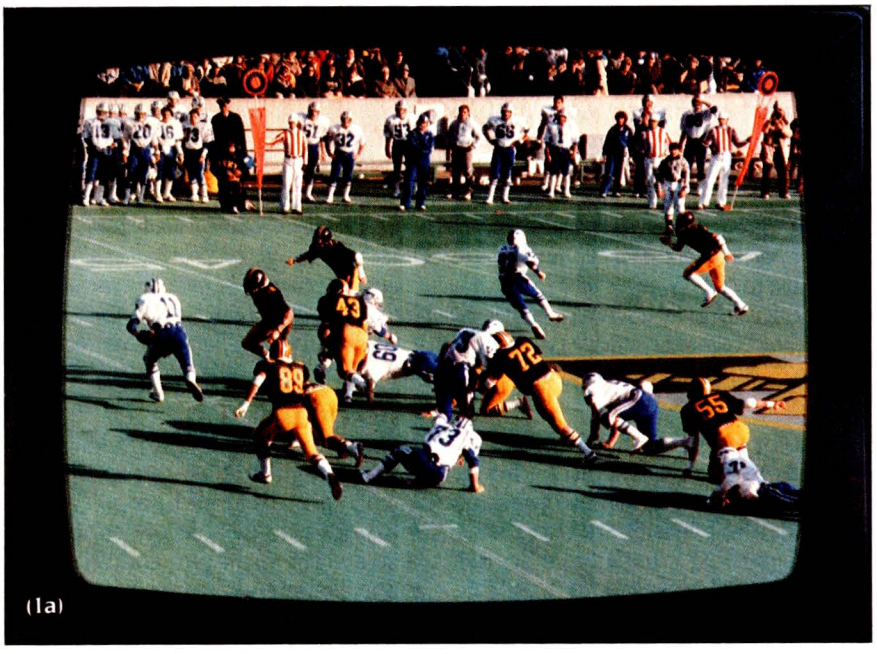

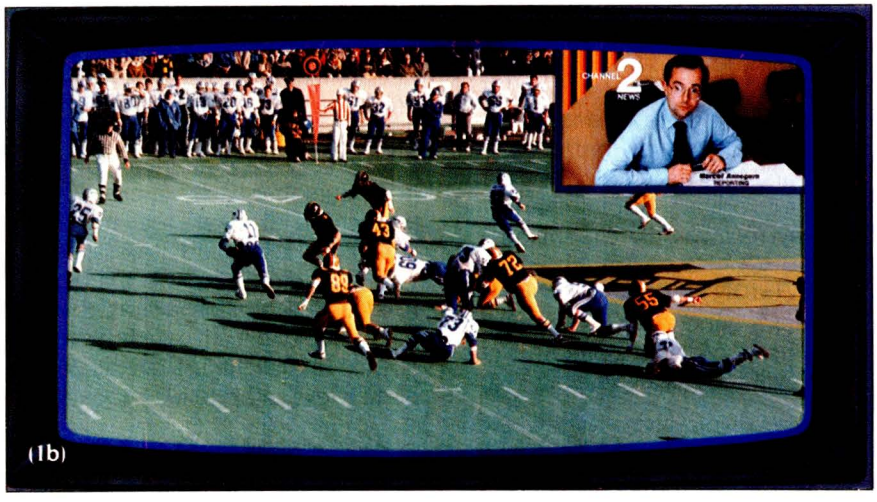

Photo 1: A *comparison of the standard* 4:3 *aspect ratio* CRT (*a*) *and the proposed* 5⅓:3 *version* (*b*).

Interactivity

A conventional CATV network consists of a head-end facility broadcast-

ing perhaps 30 channels into several trunks, each having a bandwidth of about 400 MHz. These are then bridged into branches, split into subbranches, and tapped into perhaps 10,000 homes. Several immediate consequences come to mind: a vast underutilization of bandwidth; no interactivity except for a few "experiments" like QUBE (even QUBE interactivity is responsive in only one way: from the home to the head end); and a large investment in installed plant, including the head end, cable, distribution amplifiers, etc.

When two-way network-level interactivity is available, we will be able to send data from our location to any other location on the system. We could watch one program on the large portion of the display, two smaller programs on the small displays, and use the remaining small display to monitor our electronic mail. Figure 1 illustrates a distributed interactive CATV system having this two-way network capability. When we want to interact with the head-end facility, we first communicate via an access method with the nearest upstream video switch. This switch determines the type of data and its destination. Routing of traffic in this system is much simpler than in a packet-switching system because of the limited number of choices (upstream, downstream, return to same branch, and channel to be used). For this example, video switch 1 routes the message upstream using network-level protocol to video switch 0, which converts the RF (radio frequency) message to baseband for serial input to the head-end computer. The return message follows an analogous path to the origination address.

The distributed nature of the network enables users 7 and 8 to interact via video switch 2 without affecting communication with the head end. In this manner, average throughput of the network may be increased and average message delay minimized; when traffic and revenue warrant further investment, the system operator can install more switching at appropriate nodes to improve the network.

Each video-switch node also could contain memory for user applications. This would serve two purposes. First, many messages would be highly correlated, hence system performance may be improved. For example, at 7:55 p.m. it is reasonable to anticipate that many messages would request broadcast programming information. Answers could reside at the nearest installed video switch to minimize trunk traffic. Weather, road conditions, news, and other information could be similarly located. The second purpose for "application memory" involves storing large amounts of information for users, as more fully explained in the next section.

User-to-User Video Facsimile

Because the receiver will be able to store digitally frames of information (pictures or data) and communicate between any two users on the system, video facsimile is possible. Using this capability, a user can send *one* picture to any other user on the system with a similar interface capability. It must be emphasized that this is not real-time video (continuously sending one frame after another, each frame taking 1/30 second) but rather the transport of one single frame between destinations in about 1 second. An example is offices transporting documents between different locations on the system.

Perhaps shop-at-home services would become economically viable when high-quality video pictures that would take about 1 second to transmit over a cable TV network replace cartoon-like "pictures" that take tens of seconds to transmit over telephone lines. After all, we like to "see" what we are buying.

It is unreasonable to expect people to manually input each frame if they want to participate in multiple-request interactive services. Fully automated interactive service will require multiframe storage capability. This should be economically viable, could be used to provide responsive information to all users of the network, and may be located conveniently at the bridge nodes or video switches.

Firmware

Reliable operation of both the receiver/set-top converter and the network switches will require well-developed firmware. This should not be difficult to obtain because equipment manufacturers have considerable experience in these areas. The receiver's remotely controlled tuner already operates under the control of a micro-

(continued)



Photo 2: *An example of multiple-picture-in-picture display using the 5⅓:3 aspect ratio CRT. The red dots in the two corners of the small windows indicate high-definition television display availability.*

processor. Some addressable CATV set-top converters have as many as three microprocessors. These use a token-passing scheme to gain access to a shared NOVRAM (nonvolatile random-access read/write memory with a back-up array of electrically erasable programmable read-only-memory cells) that stores channel requests, favorite channels, and other control information. Packet switches typically have used the most modern technology; design of video switches will most likely include 32-bit microcomputers.

It is important to emphasize that the video switch also most likely will have extensive mass-storage capability and perhaps even will include many videodisc storage systems. Firmware will have to be developed to support the single-frame queries of hundreds of users to a given videodisc database in a manner that will not noticeably degrade the performance of the system.

Picture Quality

The subjective quality of a picture is determined partly by its vertical resolution, horizontal resolution, and artifact content. The vertical resolution of a picture is defined as the number of horizontal lines that may be seen in one picture height. This depends on the number of lines actually scanned across the display, the quality of the "spot" scanning each line, and our ability to perceive the light that is produced. In the current NTSC system, 525 interlaced lines are transmitted 30 times per second. Only about 480 of these lines appear on the display, 240 in each 1/60th-second interlaced field. The remaining "lines" are not shown on the display and occur during the vertical flyback interval. This is the time required for the scanning spot to travel from the bottom to the top of the display and is necessary for the receiver to synchronize the picture scan to the proper position on the display. The vertical resolution may be represented by the relationship $V = K_d N_a$, where V is the vertical resolution, K_d is the display factor, and N_a is the number of "active" lines.

The horizontal resolution of a picture is defined as the number of vertical lines that may be seen in a width of the picture equal to the picture height. This is primarily determined by the maximum frequency at which the spot scanning each line may be modulated (turned on and off). In the NTSC system this frequency is 4.2 MHz, although many color television receivers restrict this value to about 2.5 MHz, as explained later.

Artifacts are visible effects on the

(continued)

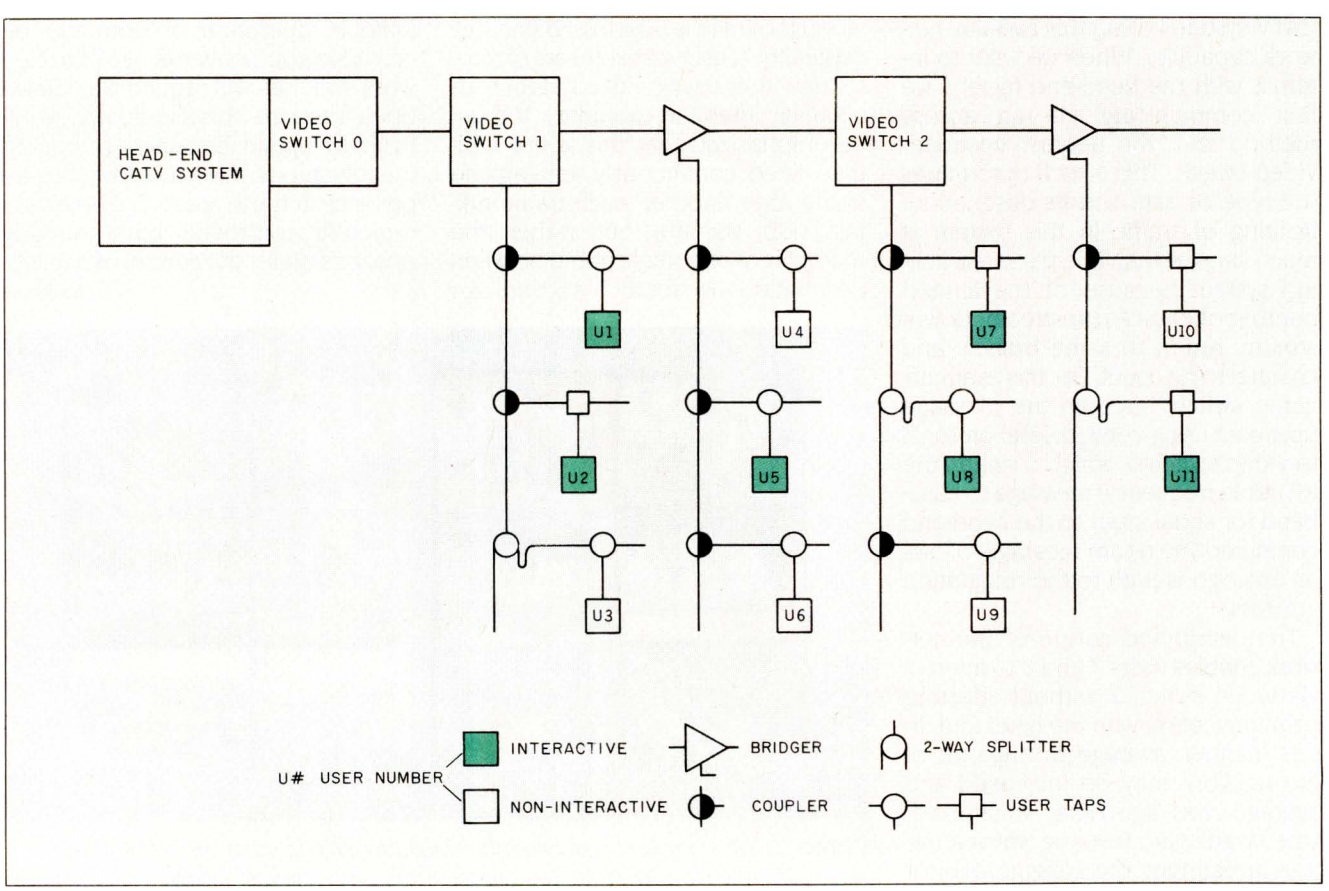

Figure 1: *An example of a two-way interactive cable-television system.*

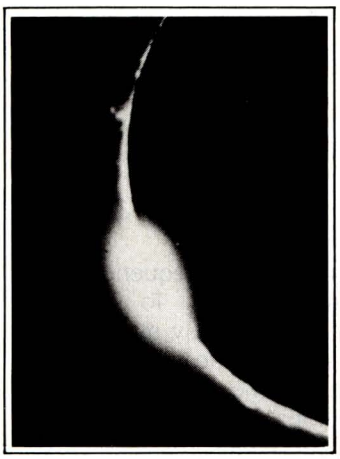

A New Age Dawns for Microcomputer Programming

Meet PROMAL™. The First Fast Structured Language That Lets You Program The Way You Always Wanted To. And For Only $49.95.

PROMAL™ is innovative.
PROMAL (PROgrammer's Micro Application Language) was designed to achieve maximum performance from small computers...performance previously impossible except with machine language. And it was developed, specifically, to meet the need for a development system for limited memory environments.

PROMAL is complete.
It's a fast, structured programming language. It's also a true development system, complete with its own command-oriented operating system executive; fast one-pass compiler; and full-screen cursor-driven editor. In short, PROMAL is the complete set of tools that microcomputer programmers have been waiting for.

PROMAL is fast.

Commodore 64 Benchmark (Sieve of Eratosthenes)	PROMAL	BASIC	COMAL	FORTH	PASCAL	
Execution Time (secs.)	30	630	490	51	55	
Object Code Size (bytes)	128	255	329	181	415	
Program Load Time (secs.)	3.2	3.8	6.3	11.2	23.5	
Compile Time (secs.)	8.5	—	—	3.9	108	

As the benchmark results in the table show, PROMAL is much faster than any language tested. From 70% to 2000% faster! And it generates the most compact object code. The PROMAL compiler is so fast that it can compile a 100-line source program in 10 seconds or less. And, not only is it fast in compile and run time, it also reduces programming development time.

PROMAL is easy.
It's easier to learn than Pascal or C or FORTH. It makes use of powerful structured statements, like IF-ELSE, WHILE, REPEAT, FOR, and CHOOSE. Indentation of statements is part of the language's syntax, so all programs are neatly and logically written. There are no line numbers to complicate your programming. And comments don't take up memory space, so you can document programs completely. And with the full-screen editor, you can speed through program development with saves to memory and compilation from memory workspace.

PROMAL is elegant.
PROMAL overcomes the performance limitations inherent in all small systems. It gives you access to the power of the machine. But it doesn't require the complexity of machine language programming. With PROMAL, you can have performance the easy way... since it was developed from the very beginning to work on small systems...elegantly.

PROMAL may be the answer to your programming needs.
Finally, there's an answer to the need for a complete environment for simple and rapid program development. Finally, a new age has begun for microcomputer programmers. Finally, there's PROMAL.

PROMAL is available for the Commodore 64 now.

PROMAL is scheduled for release on the Apple IIe in December, 1984 and on the IBM PC in 1st Quarter, 1985.

PROMAL FEATURES

COMPILED LANGUAGE
- Structured procedural language with indentation
- Fast, 1-pass compiler
- Simplified syntax requirements
- No line numbering required
- Long variable names
- Global, Local, & Arg variables
- Byte, Word, Integer & Real types
- Dec or Hex number types
- Functions w/passed arguments
- Procedures w/passed arguments
- Built in I/O library
- Arrays, strings, pointers
- Control Statements: IF-ELSE, IF, WHILE, FOR, CHOOSE, BREAK, REPEAT, INCLUDE, NEXT, ESCAPE, REFUGE
- Compiler I/O from/to disk or memory

EXECUTIVE
- Command oriented, w/line editing
- Memory resident
- Allows multiple user programs in memory at once
- Function key definitions
- Program abort and pause
- 22 Resident system commands, 8 user-defined resident commands, no limit on disk commands
- Prior command recall
- I/O Re-direction to disk or printer
- Batch jobs

EDITOR
- Full-screen, cursor driven
- Function key controlled
- Line insert, delete, search
- String search and replace
- Block copy, move, delete & write to/ read from file
- Auto indent, undent support

LIBRARY
- 43 Machine-language commands
- Memory resident
- Call by name with arguments
- I/O, Edit, String, Cursor control and much more

PROMAL runs on Commodore 64s with disk drive.

HOW TO ORDER

☐ Please send me my copy of PROMAL for the Commodore 64 at $49.95 plus $5.00 for shipping and handling at a total cost of $54.95. Satisfaction guaranteed.

☐ Please send me a PROMAL demo diskette for the Commodore 64 at $10 for the diskette plus $2.50 for postage and handling for a total cost of $12.50. (Non-refundable.)

☐ My check is enclosed. ☐ Please charge my purchase to my... ☐ Visa ☐ MasterCard

Card Number _____ Expiration Date _____

Signature _____

Name _____

Address _____

City, State, Zip _____ North Carolina residents add 4½% sales tax.

For quicker response on credit card orders, call...

Toll Free 1-800-762-7874 (In North Carolina 919-787-7703)

Our Guarantee

Try your copy of PROMAL for 15 days. If you are not completely satisfied, return it to us undamaged and we'll refund your money. No questions asked. Dealer inquiries invited.

SYSTEMS MANAGEMENT ASSOCIATES
3700 Computer Drive, Dept. PB-1
Raleigh, North Carolina 27609

display that were not present in the original scene. They are caused by the manner in which a scene is encoded for transmission and the way it was originally sampled and then displayed. The most common are

- cross color, in which narrowly spaced lines break out into a rainbow of colors; striped shirts and windows on a building, for example, often become more colorful in certain areas due to this effect
- cross luminance, in which sharp vertical color transitions and large saturated color areas appear to have small moving dots
- large-area flicker, in which very bright areas seem to flash on and off at the 60-Hz field rate
- line flicker, in which stationary edges that are not perfectly horizontal appear to move slightly up and down (or twinkle)
- line crawl, in which certain vertically moving objects lose about half their vertical resolution due to the interlaced display

In an attempt to minimize transmission bandwidth, the NTSC encodes chrominance and luminance information within the same bandwidth. Hence, the bandwidth from about 2.3 to 4.2 MHz is shared; the luminance information is centered on frequencies that are a multiple of the line frequency, while the chrominance information is offset by half the line frequency from these values. Successful decoding of the chrominance and luminance signals requires true separation of this frequency-interleaved information. To decode luminance inexpensively, many manufacturers separate the signals by low-pass filtering the luminance. This limits the horizontal resolution rather severely but eliminates the cross-luminance artifact. Line comb filters make it feasible to extend the horizontal resolution to the NTSC limit of 4.2 MHz with reduced cross effects.

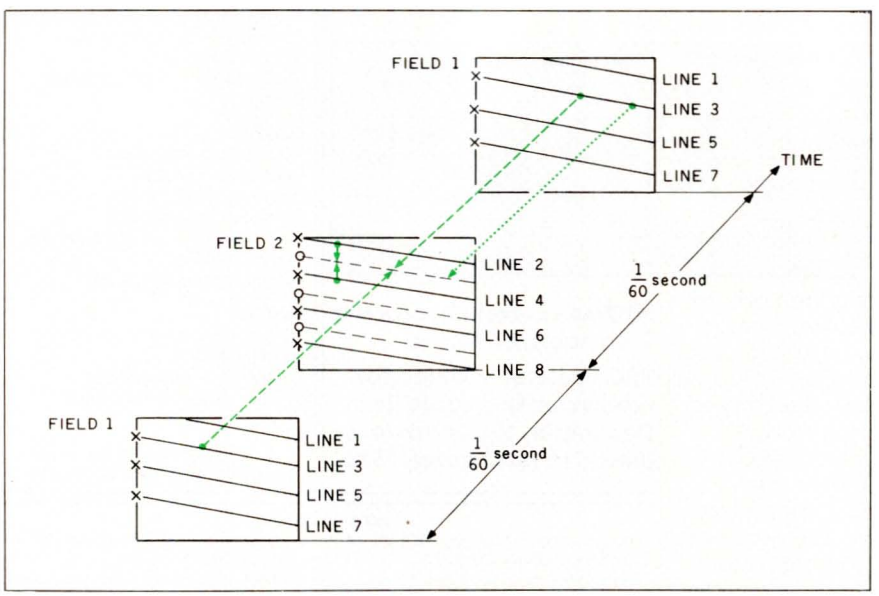

Figure 2: *The sequential-scan conversion process. X indicates a transmitted line; O indicates a locally interpolated line. The solid green line indicates line average (motion), green dashes indicate picture average (still), green dots indicate field insertion (still).*



Figure 3: *Line structure visibility. There are twice as many horizontal lines in the sequential-scan representation.*

Improved Picture Quality

Picture quality may be improved by increasing vertical or horizontal resolution and encoding the information in a different way that precludes cross effects. At Philips Laboratories we have shown that the subjective picture quality of an NTSC signal could be improved further by the use of digital picture-store memories in the receiver without changing the transmitted signal. Motion-compensated interlaced-to-sequential scan conversion demonstrates that perceived vertical resolution could be increased and line flicker eliminated. Figure 2 illustrates the interlaced scanning of normal NTSC television. If the transmitted lines are represented by X, the user sees the Xs in field 1 during the first sixtieth of a second (lines one, three, five, seven, etc.) and the Xs in field 2 during the second sixtieth of a second (lines two, four, six, eight, etc.). This alternate-line scanning repeats every other field.

With our approach, the transmitted signal format is not changed at all, but the alternate lines (represented by Os) that would appear in field 2 are stored in the receiver by spatial and temporal interpolation, and then all the lines are scanned in sequence rather than being interlaced. This technique results in a quiet appearance (with no line flicker) of the sequential display and an apparent increase in vertical resolution.

As illustrated in figure 3, the most striking effect is a noticeable reduction in the visibility of line structure. We are "misled" into believing that the number of transmitted lines has been doubled from 525 to 1050. The

(continued)

HIGH TECHNOLOGY AT AFFORDABLE PRICES

Dot Matrix Printers

Brother 2044L/Dynax DM-40	$ 1039.88
C. Itoh Prowriter (8510)	359.88
C. Itoh Prowriter-2, (136 col)	589.88
C. Itoh Prowriter BPI (IBM-PC)	389.88
C. Itoh HotDot	509.88
C. Itoh HotDot-2 (136 col)	729.88
DMX-80 (Panasonic 1090)	259.88
Epson RX/FX/LQ Series	CALL
Epson/Imagewriter upgrade	CALL
Inforunner Riteman	309.88
Mannesmann Tally Spirit-80	329.88
Okidata Microline 92	399.88
w/IBM graphics compatibility	399.88
w/Imagewriter compatibility	499.88
Okidata Microline 93	639.88
93 w/IBM graphics compatibility	639.88
Okidata Microline 84 Step II	739.88
NEC Pinwriter w/tractor (80 col)	699.88
NEC Pinwriter w/tractor (132 col)	929.88
Star Micronics Gemini 10X (PC)	269.88
Star Micronics Gemini 15X (PC)	369.88
Star Micronics Delta 10 (PC)	339.88
Star Micronics Delta 15 (PC)	489.88
Star Micronics Radix 10/15 (PC)	CALL
Toshiba P-1351	CALL
Toshiba P-1340	CALL
Printer Buffers (Quadram)	CALL

Letter-Quality Printers

Brother/Dynax DX-15	$ 399.88
Brother/Dynax DX-25	669.88
Brother/Dynax DX-35	939.88
C. Itoh A-10 Starwriter (18 cps)	549.88
C. Itoh F-10 Starwriter (40 cps)	1079.88
C. Itoh F-10 Printmaster (55 cps)	1379.88
Diablo 620/630/Series 35	CALL
NEC 2010/2030 (18 cps)	739.88
NEC 2050 for IBM-PC (18 cps)	759.88
NEC 3510/3530 (33 cps)	1379.88
NEC 3550 for IBM-PC (33 cps)	1499.88
NEC 7710/7730 (55 cps)	1779.88
Qume Sprint 11/40 (40 cps)	1519.88
Qume LetterPro 20 (18 cps)	459.88
Silver Reed EXP-770 (35 cps)	979.88
Silver Reed EXP-550 (18 cps)	469.88
Silver Reed EXP-500 (12 cps)	389.88
Silver Reed EXP-400 (10 cps)	329.88
Star Micronics PowerType (18 cps)	349.88

Modems

Anchor Volksmodem, 300 bd	$ 69.88
Anchor Mark XII, 1200 bd	279.88
Hayes Micromodem IIe (Apple)	249.88
Hayes Smartmodem, 300 bd	CALL
Hayes Smartmodem, 1200 bd	CALL
Hayes Smartmodem 1200B (PC)	CALL
Novation AppleCat, 300 bd	239.99
Novation AppleCat, 1200 bd	449.88
Novation SmartCat+, IBM-PC Internal, 1200bd	349.88
External, w/software (MS-DOS)	349.88
USR Password, 1200 baud	369.88
Multi Phone-Line Junction Box	29.88

Monitors

Amdek 300G (green)	$ 144.88
Amdek 300A (amber)	159.88
Amdek Color 300 (composite)	CALL
Amdek Color 600 (RGB)	CALL
Princeton Graphics HX-12	509.88
Princeton Graphics Max-12	199.88
Quadram QuadChrome	529.88
Roland DG-121 (green/amber)	144.88
Roland DG-122 (TTL output, green or amber, w/cable)	169.88

IBM-PC Peripherals

64K Memory (4164/200ns) 9/pkg	$ 59.88
Alloy 41 MB Hard Disk w/Tape	CALL
Alloy PC Tape Backup	CALL
Curtis Monitor Stand	39.88
Curtis Monitor Extention Cable	39.88
Curtis Keyboard Extention Cable	29.88
Curtis System Stand	19.88
Hercules Graphics Card	379.88
Keytronics 5151 keyboard	219.88

SPECIAL!: PC-Mouse & PC-Paint

Only $149.88 UPS DELIVERED

The best value in a mouse that you'll find anywhere: Mouse System's ***PC-Mouse***, with optical pad, RS-232 interface, power supply, Designer Pop-Up menu software ***and*** PC-Paint graphics program, all for only ***$149.88*** (and we'll deliver it UPS Ground FREE).

PC-Mouse (w/o PC-Paint)	$ 129.88
PC-Paint Software	$ 69.88

SPECIAL!: Columbia Computers

One of the Top-5 IBM-PC compatible computer systems. Includes Perfect Software series, TIM IV database, FastGraphs, MS-DOS 2.0, CP/M 86 and much more. A powerful package at an incredible price.

MPC 1600 (256K Desktop)	$ 1949.88
MPC VP (256K Portable)	$ 1949.88

Ask about our new PC Software selections!

Quadram 384K Quadboards (64K)	269.88
Quadram Quad 512 + (64K)	239.88
Quadram Quad 512 + (512K)	504.88
Quadram QuadColor-1	219.88
Quadram QuadColor-2	229.88
QuadVue (TTL output)	259.88
Quadram QuadLink	509.88
STB Graphics Plus II	359.88
STB Super I/O	169.88
STB Super RIO (64K)	289.88
STB Super RIO Plus (64K)	309.88
Tandon TM 100-2 DSDD	199.88
Titan Cygnus I/O (clock/parallel)	149.88
Titan Cygnus I/O (clock/RS-232)	169.88
TG Joystick	59.88

Apple Peripherals

ALS CP/M Plus Card (CP/M 3.0)	$ 279.88
ALS Smarterm II (80 col)	139.88
ALS Dispatcher (RS-232)	74.88
AMT MicroDrive (half height)	179.88
Grappler+ Printer Card & cable	109.88
Microsoft Softcard (CP/M)	244.88
Microsoft Softcard IIe (CP/M, 64K, 80 col. for IIe only)	279.88
Pkasso-U Printer Card & cable	129.88
Printer Card & cable	79.88
Quadram E-Ram (IIe, 80 col/64K)	109.88
Rana Elite-1 Disk Drive	219.88
Rana Controller	84.88
Titan/Saturn Memory Boards	
32K	$ 154.88
64K	244.88
Neptune 64k/80 col (IIe)	194.88
System Saver Fan	69.88
Titan Accelerator II	239.99
Videx VideoTerm	199.88
Videx VideoTerm/softswitch	219.88
Videx UltraTerm (80/160 column)	244.88
Videx Enhancer II	109.88

Macintosh Peripherals

1st Base DB	$ 139.88
Diskettes (5-pk)	24.88
Diskettes (10-pk)	43.88
Bluechip Millionaire	44.88
Daisywheel Printer Drivers	79.88
Flin-n-File Diskette Holder	24.88
Habadex DataBase	139.88
Hayden DaVinci Series	CALL
InfoCom Games	CALL
Kensington Starter Pak	69.88
Kensington Modem	119.88
Living Video Think Tank	99.88
MacForth (Level II)	179.88
Microcom MacModem	499.88
Micron Eye (digitizer)	CALL
Microsoft BASIC	109.88
Microsoft MultiPlan	139.88
Magnum McPic	39.88
Main Street Filer	139.88
Megahaus MegaMerge	89.88
Odesta Helix PDSS	279.88
Omnis 2 (mouse ver.)	199.88
Penguin Games	CALL
PFS: File	89.88
PFS: Report	89.88
ProVUE OverVue	199.88
Sargon III	39.88
Soft-Life MacSlots	54.88
Softworks C Compiler	319.88
Telos FileVision	139.88
T/Maker Click Art	39.88
Tecmar MacDrive (5MB)	CALL

TECHNICAL INFORMATION/SALES

(603) 881-9855

TOLL-FREE ORDER DESK

(800) 343-0726

Hours: 9:00 to 5:30 EST, Mon-Fri

- FREE UPS ground shipping on all orders over $50 (under $50 add $2.50 handling)
- MasterCard, VISA, American Express, Diners Club & Carte Blanche credit cards accepted
- No surcharges on credit card orders
- Credit cards are not charged until your order is shipped from our warehouse
- CODs accepted up to $1000 (add $10 for COD handling). Payable with certified check, money order or cash.
- Allow 10 days for shipping from date of order
- All personal checks held 30 days for clearance
- Full manufacturer's warranty on all products sold
- Software can be returned for an exact exchange only; no credits or refunds issued
- Sorry, no APO/FPO or foreign orders

HIGH TECHNOLOGY AT AFFORDABLE PRICES

THE BOTTOM LINE

MILFORD, NH 03055-0423 • TECHNICAL (603) 881-9855 • ORDER DESK (800) 343-0726

transmitted signal remains unchanged (525 lines 30 times per second) but has its perceived value increased by conversion for display at 525 lines 60 times per second.

Sequential Scan Conversion

Three methods can be used to convert a transmitted interlaced-scan signal to a displayed sequential-scan signal. *Line averaging* displays double the number of lines of information per picture but reduces the vertical resolution. However, line structure visibility is reduced without introducing artifacts on moving parts of the picture. Line flicker, however, is not eliminated by line averaging. *Picture averaging* (or *field insertion*) combines the information of all lines of both fields to preserve the vertical resolution and eliminate line flicker. However, in moving scenes, the relatively large time difference between the two fields produces jagged edges on moving contours. A third approach combines the previous two and adds *motion-detection* circuitry.

R. Prodan, of our laboratory, has demonstrated motion-detection circuitry that switches between the two methods to avoid new artifacts created by the scan-conversion process. Line-averaged and field-delayed information is combined in a complementary way based on the amount of motion in each picture element. A gradual switching from one interpolation technique to the other minimizes the visibility of the switching process. The scan conversion is accomplished by digitizing the composite video signal. Two field memories are used with the digitized input signal to provide the three fields of information needed to produce a motion-adaptive sequential-scan conversion. In this way, displayed picture quality is improved without introducing any new scan-conversion artifacts.

HDTV System Considerations

The fundamental relationship between the various factors that may be improved in a television picture is

$$R_H R_V R_W = N_C \frac{D_n}{D_o}$$

where R_H is the horizontal-resolution improvement factor, R_V is the vertical-resolution improvement factor, R_W is the width improvement factor, N_C is the number of channels used, and D_n and D_o are the display factors of the new and old systems, respectively. Of particular interest are two-channel sequentially displayed systems for which $N_C = 2$, $D_n \approx 0.8$, and $D_o = 0.5$.

Doubling the perceived vertical resolution of an NTSC display may be ac-

(continued)

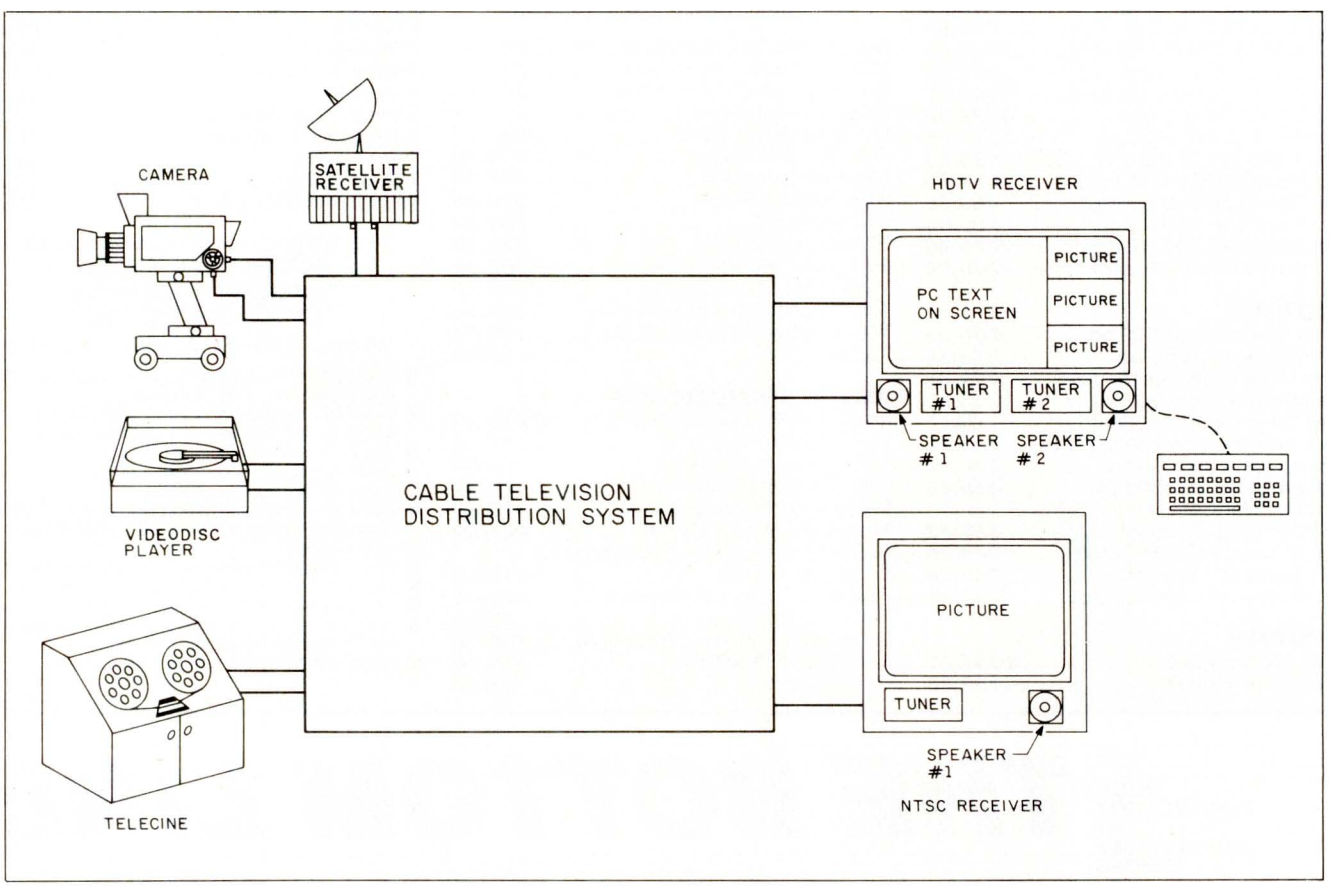

Figure 4: A *block diagram of a two-channel high-definition television system.*

INSTANT LAN

WITH STANDARD MICROSYSTEMS' NEW ARCNET-PC, ARCNET-S100 OR ARCNET-LINK, YOU CAN CREATE YOUR OWN LOCAL AREA NETWORK.

The world's first single-chip local area network controller established Standard Microsystems as a leader in networking technology. Now we're devoting our technical expertise to bring you revolutionary LAN board products, too.

Our **ARCNET-PC** board interconnects up to 255 IBM®-type personal computers, permitting them to share disk files and printer resources at an extremely efficient 2.5 Megabit data rate.

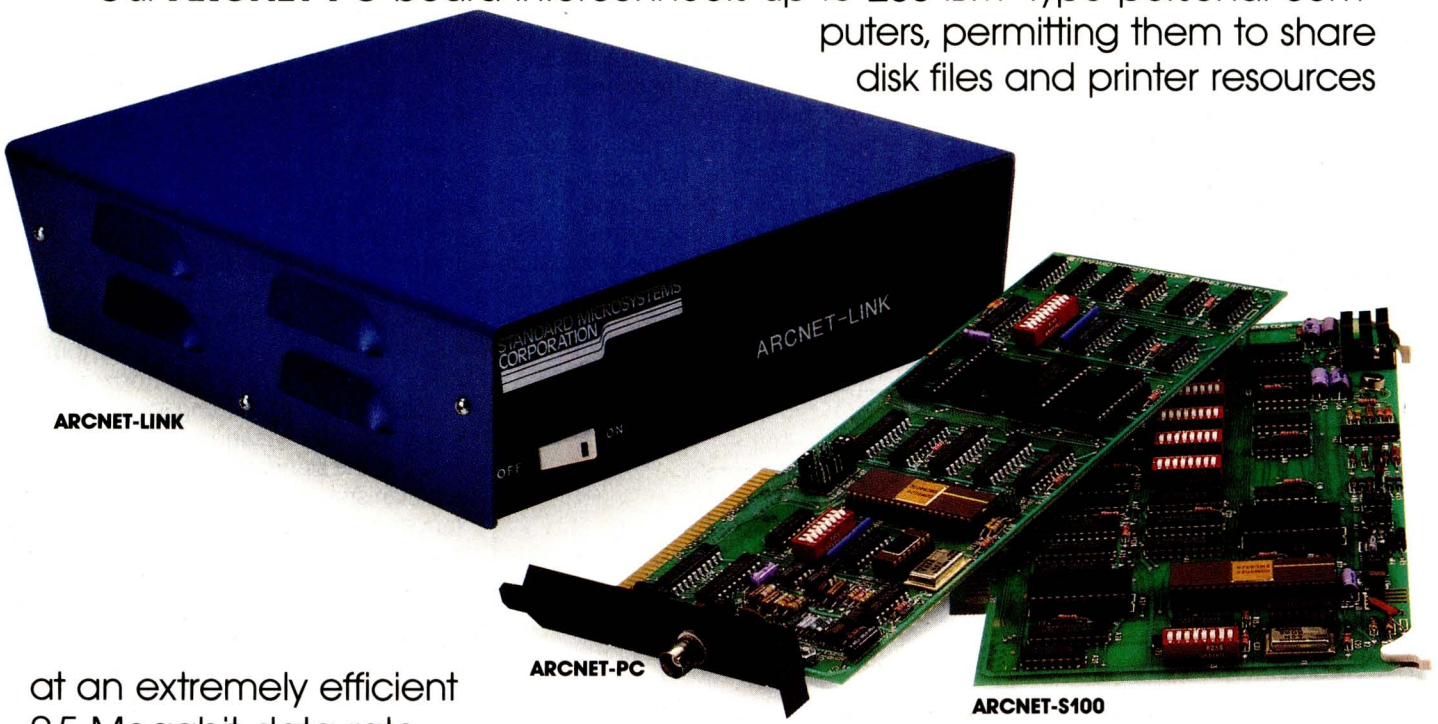

ARCNET-LINK

ARCNET-PC

ARCNET-S100

The **ARCNET-S100** board links up to 255 S100 computer systems, providing the S100 computer user with a high performance local area network.

The **ARCNET-LINK** is a self-contained unit that provides a simplified interface between equipment with a programmable asynchronous RS-232 port and an ARCNET® local area network.

All three products incorporate SMC's industry-standard MOS/VLSI local area network chip set to give you a totally integrated and cost-effective LAN solution. Software available from Standard Microsystems and others provides increased capability for your networking applications. Standard Microsystems Corporation, 35 Marcus Boulevard, Hauppauge, NY 11788. (516) 273-3100.

STANDARD MICROSYSTEMS CORPORATION

IBM® is a trademark of the International Business Machines Corporation.
ARCNET® is a trademark of the Datapoint Corporation.

Inquiry 329

complished by simultaneously increasing the number of lines *and* the display factor. Because the required bandwidth of a system increases in proportion to the square of the number of lines, it is preferable to use the minimum number of lines in an HDTV system. Hence, an 1125-line *interlaced* display has a perceived vertical resolution of about 562 lines, while a 657-line *sequential* display has a vertical resolution of 526 lines while using only $(657/1125)^2 = 34$ percent of the bandwidth. It is possible, therefore, to double the perceived vertical resolution of an NTSC display by increasing the number of lines from 525 to 657, transmitting this interlaced signal, performing an interlaced-to-sequential scan conversion in the receiver, and finally displaying the result sequentially. For a 5⅓:3 aspect ratio ($R_W = 1.33$) two-channel system, this results, however, in only a 20 percent increase in horizontal resolution.

Another point to consider is available transmission bandwidth. A straightforward doubling of the number of lines from 525 to 1050, increasing the width from 4:3 to 5⅓:3, and doubling the resultant signal bandwidth would require 5⅓ times the single-channel bandwidth. By increasing the display factor and increasing the number of lines from 525 to 657, the required bandwidth is reduced to only 3⅓ times the single-channel bandwidth.

These two approaches are unacceptable because they use an excessive amount of bandwidth. The two-channel 657-line system offers only a 20 percent improvement in horizontal resolution; doubling the horizontal resolution would require 3⅓ times the NTSC bandwidth. We feel that these problems may be overcome by better matching the transmitted television signal to the properties of human vision.

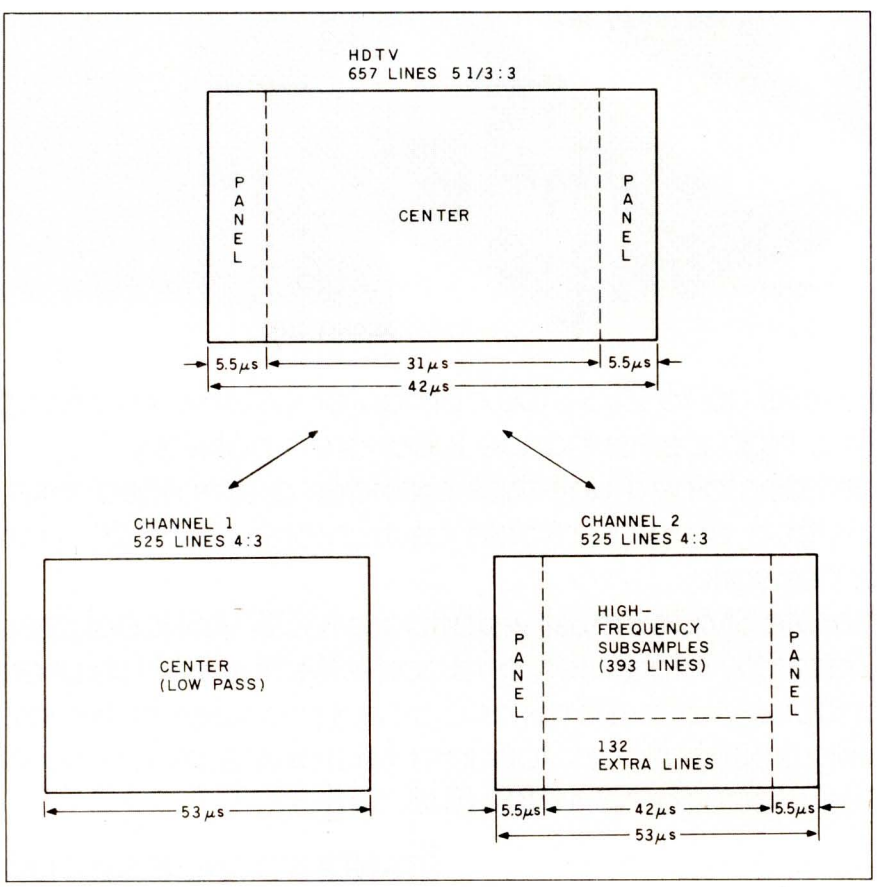

Figure 5: A *possible method for delivering a two-channel* NTSC-*compatible high-definition television transmission.*

Psychovisual Enhancement

Drs. William Glenn and Karen Glenn at the New York Institute of Technology have shown that it requires a finite time to perceive changes in images. Although the exact relationship is complex and not completely understood, the general principle is that the difficulty in perceiving an image increases as its subtended spatial angle decreases and/or its rate of motion increases. The operational impact is that it is unnecessary to transmit the high spatial-frequency information in pictures at the standard rate of 30 frames per second (fps). The required transmission bandwidth may be reduced significantly without affecting the perceived horizontal resolution by transmitting low spatial-frequency information (below 4.2 MHz) at the standard rate and refreshing high spatial-frequency information (above 4.2 MHz) below the standard rate. This, of course, requires digital memory in the receiver so that the 60-Hz field rate sequential display may have the full horizontal resolution composed from the previous few fields. The doubling of horizontal resolution at 30 fps, which normally increases bandwidth requirements by a factor of 20/15, may be reduced by a factor of 5 to 4/15. A two-channel HDTV system having about twice the perceived vertical and twice the perceived horizontal resolution of NTSC television may be realized by transmitting the higher frequencies at an equivalent of only 6 fps.

Two-Channel NTSC-Compatible HDTV

In a two-channel NTSC-compatible HDTV, signal sources may be distributed over a cable system to either present NTSC receivers or new HDTV receivers (see figure 4). In this manner producers, distributors, and equipment manufacturers will be able to continue to operate as the evolu-

(continued)

Inquiry 178 for Dealers. Inquiry 179 for End-Users. ⟶

Look to the Leader

I² has been delivering low-cost storage products since 1978



For affordable, expanded storage for your IBM PC or PC compatible, look to the leader—I² Interface, Inc. With I² Interface Winchester DiskSystems,© you can have levels of storage typically associated with larger, more expensive computer systems. Our DiskSystems are available with formatted storage capacities of 10, 15, 22, 33, 55, 87 and 119 megabytes. These DiskSystems are bootable from the Winchester on some PCs. Plus, I² Interface has more to offer:



Internal Winchester DiskSystem

- Internal-mounted Winchester system with 10 megabytes
- Removable cartridge DiskSystem with 10 megabytes
- Cartridge TapeSystems© with 10 to 60 megabytes
- Plus an array of other peripheral products



Cartridge TapeSystem

Simple and fully compatible

I² DiskSystems and TapeSystems are simple to install and have proven reliability. All are FCC Class B approved and undergo an extensive 48 hour test period prior to shipment. All are backed by a 90-day warranty that covers parts and labor with an extended one-year warranty available. I² Interface products are compatible with IBM PC, XT and portable models, plus other popular PC compatible computers.

See your dealer today to get the affordable means to expand the capabilities of your IBM PC and PC compatible. Look to the leaders—look to I² Interface.



Removable Cartridge DiskSystem

I² Interface, Inc.

21101 Osborne Street
Canoga Park, CA 91304
(818) 341-7914 Telex 662949 CNPK

IBM is a registered trademark of IBM Corporation
DiskSystems and TapeSystems are copyrights of I² Interface, Inc.

© 1984 I² Interface, Inc. All rights reserved
In Australia, Dick Smith Electronics (02) 888-3200

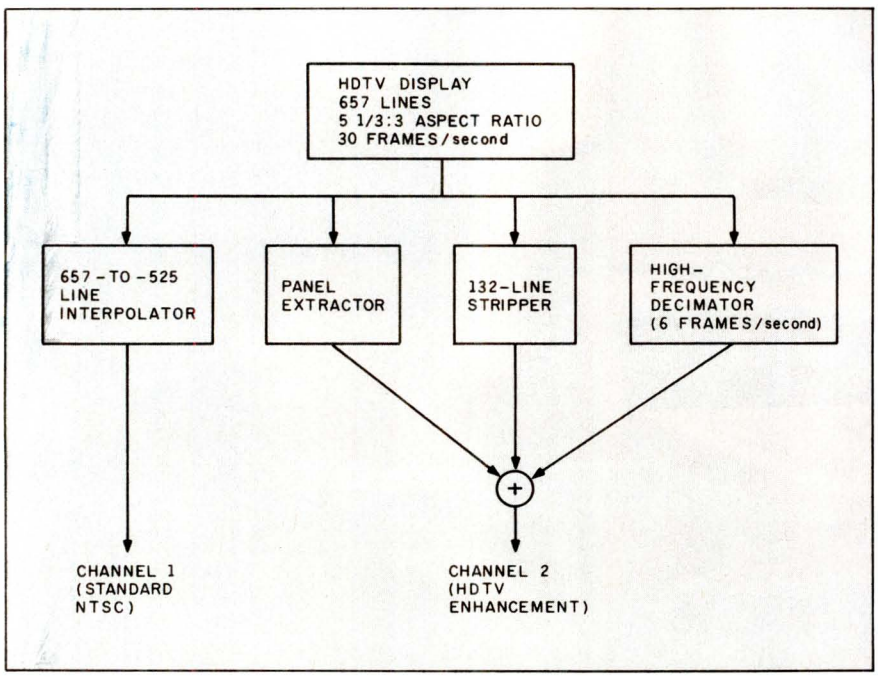

Figure 6: A *block diagram of two-channel decomposition.*

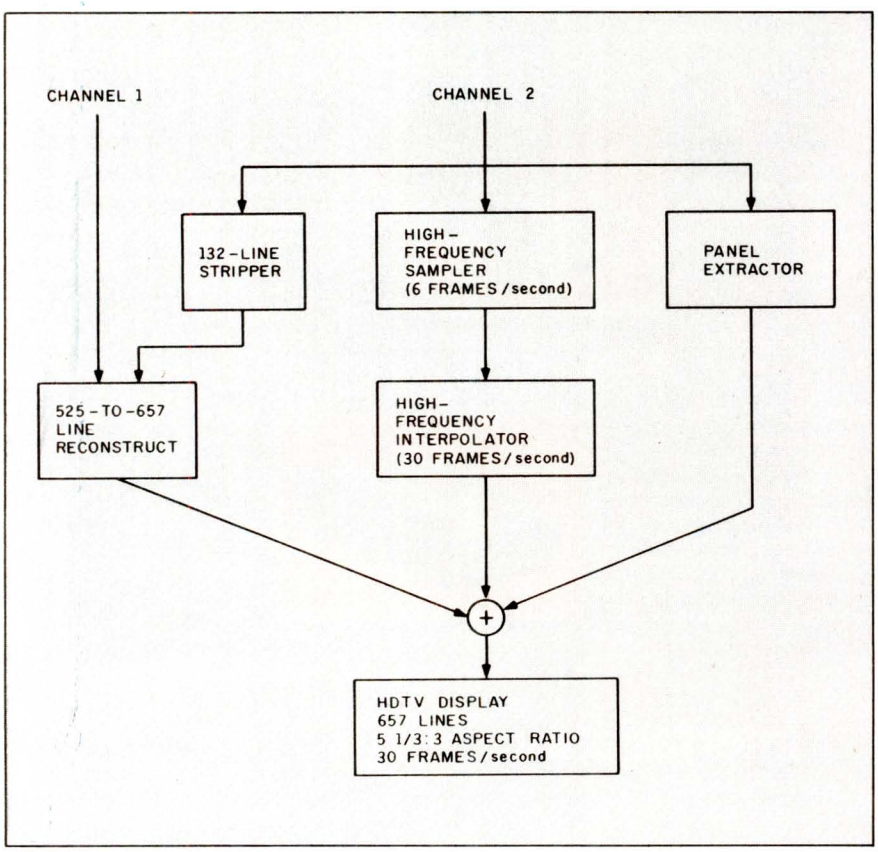

Figure 7: A *block diagram of two-channel reconstruction.*

tion toward HDTV occurs.

Figure 5 shows one possible method of delivering this HDTV signal over two standard NTSC channels. This approach separates the HDTV signal into a standard NTSC channel (channel 1) and an augmentation channel (channel 2). Channel 1 contains the "center" 4:3 aspect ratio portion of the HDTV picture that has been low-pass filtered to 4.2 MHz horizontally and converted from 657 to 525 lines by a vertical filtering operation. This signal can be displayed on all current NTSC receivers. Channel 2 contains 132 of the original 657 lines, the side panels for the 5⅓:3 aspect ratio display, and the high-frequency information for the entire 5⅓:3 picture in the remaining 393 lines between the side panels. The side panels and 132 extra lines are low-pass filtered to 4.2 MHz. The high-frequency subsampled information is shifted into the same 4.2-MHz low-pass region by a filtering and sample-rate conversion process. This signal also can be displayed on all current NTSC receivers.

Figure 6 is a block diagram of the two-channel decomposition. The 657-to-525 line interpolator produces the horizontally low-pass filtered 525-line NTSC picture from the 657-line wide-band, wide-aspect ratio source. During this process, 132 of the original 657 lines are low-pass filtered and inserted into channel 2. This information represents a linear transformation of the original 657 lines, which makes the procedure reversible at the HDTV receiver.

The panels outside the normal 4:3 center portion are extracted after a 525-line interpolation and similarly inserted into channel 2. This permits reconstruction of the 5⅓:3 aspect ratio low-pass information at the HDTV receiver. The high spatial-frequency information is subsampled temporally at a 6-fps rate, shifted to the baseband low-pass frequency region, and inserted into the 393 remaining lines between the panels in channel 2. The two channels are transmitted simultaneously over two

(continued)

THE 8087 AND 80287 ARE IN STOCK!

MicroWay is the world's leading retailer of 8087s and high performance PC upgrades. We stock a complete selection of 8087s that run at 5 and 8mhz. All of our coprocessors are shipped with a diagnostic disk and the best warranty in the business – 180 days! We also offer daughterboards for socketless computers such as the NEC PC and PCjr, and a board which increases the clock speed of the 80287 in the PC AT. Our new NUMBER SMASHER™ will run the IBM PC at clock speeds up to 10mhz and achieves a throughput of .1 megaflops with 87BASIC/INLINE, Intel Fortran, or Microsoft Fortran. Software reviewers consistently cite MicroWay software as the best in the industry! Our customers frequently write to thank us for recommending the correct software and hardware to meet their specific needs. They also thank us for our same day shipping! In addition to our own products which support the 8087 and 80287, we stock the largest supply of specialized software available anywhere. These include three FORTRANs, three PASCALs, APL, Intel's ASM-86 and PL/M-86, several Cs, 87BASIC/INLINE, 87MACRO, 87FFT, and MATRIXPAK. For real time or multi-user applications we offer RTOS™ – our implementation of Intel's iRMX executive. Our new products include a professional debugger with 8087 support and a translator that converts object modules into readable assembly language files. If you have a question about which computer, language, compiler, operating system or application package is best suited to your problem, we can answer it. Just call:

617-746-7341

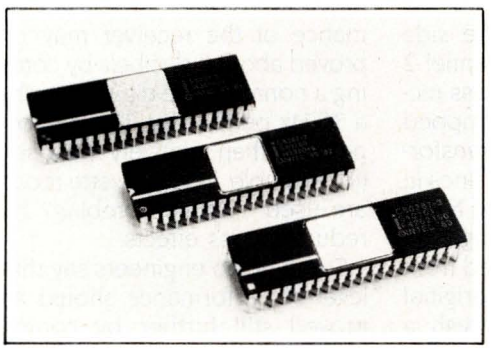

MicroWay™ 8087 Support

For the IBM PC, PC XT, PC AT and Compatibles.

SCIENTIFIC SOFTWARE

87FFT™ performs Forward and Inverse FFTs on real and complex arrays which occupy up to 512K bytes of RAM. Also does convolutions, auto correlations, hamming, complex vector multiplication, and complex to radial conversions. Callable from MS Fortran or 87BASIC/INLINE..... **$150**

87FFT-2™ performs two-dimensional FFTs. Ideal for image processing. Requires 87FFT...**$75**

MATRIXPAK™ manages a **MEGABYTE!** Written in assembly language, our runtime package accurately manipulates large matrices at very fast speeds. Includes matrix inversion and the solution of simultaneous linear equations. Callable from MS Fortran 3.2, 87MACRO, 87BASIC/INLINE, and RTOS ..... each **$150**

DATA ACQUISITION PACKAGE

Interactive, user-oriented language which allows the acquisition and analysis of large data streams..... **CALL**

GRAPHICS PACKAGES

Energraphics (stand alone)	295
Grafmatic for MS Fortran or Pascal	125
Plotmatic for Grafmatic	125
Halo for Basic, C or Fortran	each 150

OTHER TOOLS

Alpha Software ESP	595
Borland Sidekick, Toolbox, or Graphics	45
COSMOS Revelation	850
PSI MATHPAK	75
smARTWORK	895
SPSS/PC	695
STSC APL★PLUS/PC	475
Pocket APL	85

PC AT and 86-310 DRIVES

30 MEGABYTE WINCHESTER	2000
53 MEGABYTE WINCHESTER	2600
SYQUEST FIVE MEGABYTE	950
FIVE MEGABYTE CARTRIDGE	100
MAYNARD WS1 HARD DISK	950
MAYNARD WS2 or WS3 HARD DISK	1109

RTOS - REAL TIME OPERATING SYSTEM

RTOS is a multi-user, multi-tasking real time operating system. It includes a configured version of Intel's iRMX-86, LINK-86, LOC-86, LIB-86, OH-86, and MicroWay's 87DEBUG. Runs on the IBM-PC, XT, PC-AT and COMPAQ..... **400**

INTEL COMPILERS[1]

FORTRAN-86	750
PASCAL-86	750
PL/M-86	500
87C (LATTICE/MICROWAY)	750
ASM-86	200

87BASIC/INLINE™ converts the output of the IBM Basic Compiler into optimized 8087 inline code which executes up to seven times faster than 87BASIC. Supports separately compiled inline subroutines which are located in their own segments and can contain up to 64K bytes of code. This allows programs greater than 128K! Requires the IBM Basic Compiler and Macro Assembler. Includes 87BASIC **$200**

87MACRO™ - our complete 8087 software development package. It contains a "Preprocessor," source code for a set of 8087 macros, and an object library of numeric functions including transcendentals, trigonometrics, hyperbolics, encoding, decoding and conversions. For the IBM Macro Assembler, Version 1.0 or 2.0..... **$150**

OBJ→ASM™ - a multipass object module translator and disassembler. Produces assembly language listings which include public symbols, external symbols, and labels commented with cross references. Ideal for understanding and patching object modules and libraries for which source is not available **$200**

87DEBUG™ - a professional debugger with 8087 support, a sophisticated screen-oriented macro command processor, and trace features which include the ability to skip tracing through branches to calls and software and hardware interrupts. Breakpoints can be set in code or on guarded addresses in RAM..... **$150**

HARDWARE AND LANGUAGES

8087-3 5mhz..... $149
Including DIAGNOSTICS and 180-day warranty For IBM PC and compatibles.

8087-2 8mhz..... $275
For Wang, AT&T, DeskPro, NEC, Leading Edge

80287-3 5mhz..... $275
For the IBM PC AT

64K RAM Set..... $30

256K RAM Set..... $195

128K RAM Set PC AT $225

NUMBER SMASHER™... CALL
10mhz 8087 coprocessor board for the IBM PC

FORTRAN and UTILITIES

Microsoft Fortran 3.2	239
IBM Professional Fortran	595
Intel Fortran-86[1]	750
FORLIB+	65
STRINGS and THINGS	65

C and UTILITIES

Lattice C	299
Microsoft C	329
C86	299
C TOOLS	85
C Trigs and Trans	150

BASIC and UTILITIES

IBM Basic Compiler	270
87BASIC/INLINE	200
Summit BetterBASIC™	175
Summit 8087 Module	87

MACRO ASSEMBLERS

IBM Assembler with Librarian	155
87MACRO	150

PASCAL

Microsoft Pascal 3.2	209
Borland Turbo	45
Turbo with 8087 Support	85

[1]Requires RTOS or iRMX-86. All Intel compiler names and iRMX-86 TM Intel Corp.

Formerly MicroWare, Inc. – not affiliated or connected with MicroWare Systems Corporation of Des Moines, Iowa.

MicroWay P.O. Box 79 Kingston, Mass. 02364 USA (617) 746-7341

You Can Talk To Us!

Inquiry 110

DISCOUNT
1 - 800 - 354 - 2985
HOT LINE

GUARANTEED BEST PRICES
CALL MON - SAT 8 - 5

SUPER SALE
OKI 92P - $349 STAR 10X - $235
HAYS 1200B - $399 LOTUS 123 - $295

MODEMS
HAYS
1200 - $475 MICROMODEM - $225
U.S. ROBOTICS
PASSWORD - $310 IBM PC - $320

COMPUTERS
ALTOS
586-20 - $5695 586-40 - $7195
SANYO
550-1 - $679 555-2 - $1049

PRINTERS
C-ITOH
F10 - $899 8510 - $1175
DATASOUTH
DS180 - $1099 DS220 - $1399
DIABLO
620 - $725 630 - $1675
EPSON
RX80 - $220 JX80 - $560
NEC
3510 - $1215 3550 - $1519
OKIDATA
182 - Call 93 - $575
SILVER REED
400 - $269 770 - $839
TELEVIDEO
TPC II - $1729 1605 - $1699

SOFTWARE
LOTUS
123 - $295 SYMPHONY - $439
MICROPRO
Wordstar - $189 Wordstar Pro - $295
D Base II - $299 Friday - $175
Multiplan - $139 Supercal III - $200
MBSI - $325 TCS - $75

BOARDS
AST
Six Pac - $259 Combo + - $259
QUADRAM
Quadlink - $449 Quadboard - $279

TERMINALS
TELEVIDEO
914 - $515 925 - $699
WYSE
50 - $495 75 - $565

DISCOUNT COMPUTER
4655 N. ORACLE RD. #207
TUCSON, ARIZONA 85705
Prices Subject To Change.

separate NTSC channels. Standard receivers would receive either of these; the channel 1 signal is the equivalent of the present transmission, the channel 2 signal is recognizable as the extra information necessary to build the perceived better picture.

Figure 7 is a block diagram of the two-channel reconstruction. Channel 1 carries the center portion of the wide-aspect ratio picture. The side panels are extracted from channel 2 to give a 5⅓:3, 525-line low-pass picture. The extra 132 lines are stripped from channel 2, and a linear transformation yields the original 657 lines in the low-pass region of standard NTSC horizontal resolution. The high-frequency information is extracted from channel 2, shifted up to the original high-frequency region to refresh a digital memory frame store that receives the information over the channel at 6 fps. The frame store is continuously read out at the standard 30-fps rate. This increases the perceived horizontal resolution to double the standard NTSC resolution for still pictures. Horizontal detail will have lower temporal resolution due to the subsampling. The eye is less sensitive to fine detail that's moving; we will not perceive this loss in "theoretical" resolution.

Non-Shared Bandwidth Systems

A digital frame memory in the receiver enables further improvements in picture quality. The noise performance of the receiver may be improved about 3 decibels by constructing a nonrecursive digital filter having a 30-Hz periodicity. This is more important when relatively noisy sources (for example, videocassette recorders) are used. "Frame combing" further reduces cross effects.

Some video engineers say that this level of performance should be improved still further by completely eliminating cross effects. This may be done by frequency or time multiplexing the luminance and chrominance information in the video signal. To eliminate cross effects by frequency multiplexing, the encoding must not let the luminance and chrominance information share the same bandwidth.

Memory Technology for Digital-Feature Television

Many new television features described in this article are made possible by low-cost digital memories used to store displayed images. The displayed portion of each of the 480 lines in the current 4:3 NTSC system takes about 53.5 μs to scan. When sampled at 13.5 MHz, this results in 720 1-byte samples per line. To facilitate signal processing, this is expanded to 720 + 180 + 180 = 1080 bytes per line; the extra samples are added so that luminance and two color-difference signals are digitally available. Widening the screen to 5⅓:3 without increasing the horizontal resolution increases this to 1080 × 5⅓/4 = 1440 bytes per line. Doubling horizontal resolution results in a total of 2880 bytes per line. Because the 657-line system has about 600 lines on the display, one HDTV image requires a total of 1,728,000 bytes of storage.

Currently there are two competing technologies for implementing this store: high-speed DRAMs (dynamic RAMs) and charge-coupled devices (CCDs). DRAMs offer the advantage of easily handling multiple-picture composition. CCDs, which operate as a FIFO (first-in/first-out) sequential store, do not require address generation. Further, the extremely high-speed requirements, 2880 bytes in 42 μs, or 1 byte about every 15 nanoseconds, may be more readily attainable in this technology. Components similar to line-addressable RAMs (LARAMs) could be developed by IC manufacturers to fill this need.

GLOSSARY

ACTIVE LINES: lines of the television signal that appear on the display; the NTSC television signal has 525 lines, of which about 480 are displayed; the remaining lines are used for synchronization and test purposes.

ARTIFACTS: visible effects, generated in a picture due to its transmission, that were not present in the original scene.

ASPECT RATIO: picture width divided by picture height; standard television has a 1.33 (or 4:3) aspect ratio; high-definition television will have a wider (perhaps 1.66 or 1.78) aspect ratio more like that of motion picture film.

CHROMINANCE: part of the television signal that characterizes the color (hue and saturation) without reference to its luminous intensity (brightness).

COMB FILTER: an electronic filter with a spectral response that consists of several equally spaced elements that resemble the teeth of a comb.

DISPLAY FACTOR: a constant that converts the number of active lines transmitted into the number of vertical lines perceived on a display.

FIELD: a sample of the lines in a TV picture (or frame); a field in NTSC TV consists of 262½ lines transmitted in 1/60 second; i.e., all the odd- or even-numbered lines in the picture.

FRAME: smallest number of fields comprising one complete television picture; in NTSC television, two fields having a total of 525 lines transmitted in 1/30 second (i.e., all the lines in a picture).

FRAME MEMORY: a digital device using either RAMs or charge-coupled devices to store a complete television picture; for NTSC television, this requires about 500,000 bytes.

INTERLACED SCAN: a means of displaying a picture whereby the lines of the second field of a frame are placed halfway vertically between the lines of the first field of a frame.

LUMINANCE: part of the television signal that characterizes the light intensity (brightness) without reference to its color (chrominance).

RESOLUTION: the number of lines that may be represented in a distance equal to the height of a display.

SEQUENTIAL SCAN: a means of displaying a picture whereby all the lines of a frame are presented one after another in sequence; sometimes referred to as progressive scan.

VIDEO FACSIMILE: transmission of one television picture from one to any other location on a CATV system in about 1 second.

If all the luminance information from 2 to 4.2 MHz is up-converted by 3 MHz, then the chrominance and luminance information are easily separable, completely eliminating cross effects.

Cross effects also may be eliminated by time multiplexing the chrominance and luminance information. Instead of encoding the chrominance and luminance information on each line into a shared-bandwidth composite-video signal, the information is individually time-compressed and shifted. For a typical MAC (multiplexed analog component) signal, sound and sync information occupies the first 10 μs (microseconds) of each line; one of the color-difference signals, time-compressed by a factor of three, occupies the next 18 μs of the line; and the luminance signal, time-compressed by a factor of three to two, occupies the remaining 36 μs of the line.

Time compression of the signal by an amount X increases the required bandwidth for transmission X times. Hence, the required bandwidth for transmission of the luminance is $1.5 \times 4.2 = 6.3$ MHz, while the required bandwidth for the chrominance is $3 \times 1.5 = 4.5$ MHz. The choice of the compression factors is based not only on bandwidth considerations but also on noise performance over the communication channel. In principle, any

(continued)

Inquiry 275

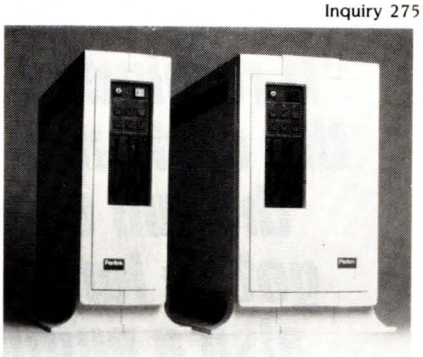

New graphics system offers wide open architecture to the designer.

- Open architecture.
- Industry standard buses.
- Adapts to thousands of tasks.
- Expandable with modules from us and many others.
- Obsolescence proof.
- Color or monochrome.

Our new Perigraf 1 is built around a standard Q-bus with slots for many extra cards to expand or customize your system.

Peritek offers cards for color or monochrome, for dot graphics or alpha-numerics, for low to high resolution, and for one or more display channels.

You can choose a single unified bus or a bus split for two microprocessors. Choose a standard single-wide enclosure or a double-wide enclosure for super micros.

You get a hard disk and two floppies on a single plug-in module that you can replace in one minute.

You can link up to six Perigrafs for parallel data transfer by DMA at 250,000 bytes/sec.—or link any number for local area networking by Ethernet.

Complete development software is included. Image editor. Vector de-jagging. System diagnostics. GKS-compatible software. All supported by popular operating systems.

Basic $14,500 price includes 11/73 CPU, 512 Kb RAM, 2 RX50 type floppies, 36 Mb hard disk, 4 port serial I/O, RT clock, and graphics interface.

Contact Peritek Corporation, 5550 Redwood Road, Oakland, CA 94619 (415) 531-6500. Eastern Regional Sales Office (516) 931-4664. TWX 910-366-2029.

Peritek

"It reminded me of some of the early micro conventions, the fun ones before they got so large . . . there were also a number of industry heavyweights to make it likely that what was said would have an effect."

—Jerry Pournelle on Sage Faire '84

For three days in February, Stride Faire '85 gives you an opportunity to learn where high performance supermicrocomputer technology is going. Some of the heavyweights in the industry will discuss what's happening, and more importantly, what's about to happen. You'll see and hear panel discussions, speakers, demonstrations and workshops regarding products, companies and items like:

- **Digital Research**
- **Modula**
- **UNIX**
- **RM/COS**
- **CAD/CAM**
- **Multiuser**
- **Flexware**
- **Local Area Networking**
- **Sales Techniques**
- **BOS • PDOS**
- **TOM Software**
- **CP/M • Forth**
- **Idris**
- **Wyse Terminals**
- **Flooring**
- **Retail Software**
- **DB Master**
- **APL • LISP**
- **MCBA**

We are very proud to announce that our keynote speaker will be Niklaus Wirth, considered to be the father of Pascal and Modula-2.

Stride Micro will also introduce some very important and exciting new products at the Faire.

It all happens at the fabulous MGM Grand Hotel and Casino in Reno, Nevada. Besides attending the Faire, you may want to venture out into the picturesque scenery of Lake Tahoe for some of the best skiing in the world. Special hotel and travel rates are available through Stride Micro.

Make plans to attend Stride Faire '85, February 8-10. It's your chance to stay a step ahead in the computer race, with a chance to win a Stride 420 computer (complete with software) valued at over $4,000, just for attending the Faire.

Call today for an information package on Stride Faire '85.

Contact: **Laura Smith**
Stride Faire '85
(702) 322-6868

STRIDE Faire '85

FEBRUARY 8-10, 1985

Stride Micro (Formerly Sage Computer), 4905 Energy Way, Reno, Nevada 89502

choice of $\frac{1}{X_C} + \frac{1}{X_L} = 1$ is possible; $X_C = 3$ chrominance compression and $X_L = 1.5$ luminance compression are selected to optimize subjective performance for signals having the same RGB (red-green-blue) inputs as European PAL (phase alternation line) over a direct broadcast satellite (DBS) system.

E-MAC AND THE SMART RECEIVER

Unlike current TV systems, with both the two-channel NTSC-compatible HDTV and MAC coding systems, the time position of the transmitted signal no longer directly corresponds to the position of the information on the final display. The decoder uses the memory in the receiver to change the time sequence of the signal to reassemble the picture according to a fixed predetermined mapping. S. Liong Tan (N.V. Philips) and Richard Jackson (Philips Redhill) suggested that a large number of different formats could be decoded by a "smart" receiver if the transmitted signal included format-decoding information. Recently the European Broadcasters Union modified the proposed MAC specifications to include signal format information in the last line. A "smart" receiver could select the correct picture format map from the information provided by the last line.

SUMMARY

In this glimpse into future television, I have presented the technical basis for the evolution of color television in the "information age." This is made possible by the development of frame stores using VLSI. These new components increase the extent of signal-processing capabilities that are economically viable. Local- and network-level interactive capabilities will be emphasized, including interuser transmission of digital data and video facsimile.

The exact format for HDTV and the extent of receiver flexibility are being evaluated. Once a path is cleared, the journey to future television may be completed in a few years. ■

Inquiry 332

"Despite the recent press notices, multiuser microcomputers aren't anything new!"

This is the first in a series of discussions with Rod Coleman, President of Stride Micro (formerly Sage Computer) on the 68000 multiuser market and its current environment.

Q: Why do you say that?

RC: "The technology to build a high performance multiuser system has been around for five years. And while some of the leaders in this industry have been pretending that micro multiuser didn't exist, we've been shipping complete systems for nearly three years. The benefits of multiuser are undeniable; it is more cost effective, and offers greater flexibility and utility. But until just recently, the marketing pressure to be compatible instead of being better, has blinded the industry."

Q: What do you mean?

RC: "Well, for example, the Motorola 68000 processor introduced 16/32-bit technology to the personal computer world a long time ago. It was fully capable of meeting high performance and multiuser design requirements in 1980. Instead of this trend taking off, most energy was spent promoting 8088/8086 products that were clearly inferior from a technical point of view. This phenomenon leads me to believe that they will soon rewrite the old proverb: 'Build a better mousetrap and the world will beat a path to your door,' but only if they can find the way through the marketing fog."

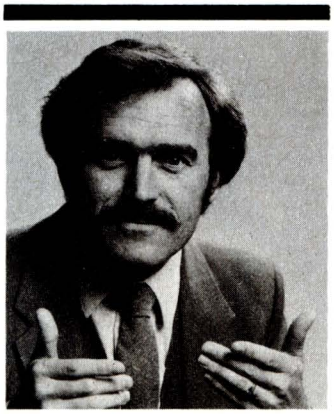

"A surprising feature is compatibility. Everybody talks about it, but nobody does anything about it."

Q: Are things changing now?

RC: "Yes and no. With the business world starting to take more and more interest in microcomputer solutions, the advantages of a solid multiuser system couldn't be kept hidden forever; companies like ours and a few others were beginning to make a dent. Instead of taking a fresh approach, some of the newest multiuser offerings will probably only give the technology an undeserved black eye! Multiuser is far more than the ability to plug in more terminals. It involves things like machine compatibility, fast processors, adequate memory, large storage capacities, backup features, networking, and operating system flexibility."

Q: Is this what makes the new Stride 400 Series different?

RC: "Exactly. That sounds self-serving, but it's true. Today a number of companies are introducing their first multiuser system. We've been building and shipping multiuser machines for almost three years. We know the pitfalls, we've fallen into some of them. But we have learned from our mistakes."

Q: Give me some examples.

RC: A hard disk is almost mandatory for any large multiuser installation. Yet, backing up a hard disk can be a nightmare if you only have floppies to work with. That's why we've added a tape backup option to all the larger Stride 400 Series machines. It's irresponsible for a manufacturer to market a multiuser system without such backup. Another good lesson was bus design. We started with one of our own designs, but learned that it's important not only to find a bus that is powerful, but also one that has good support and a strong future to serve tomorrow's needs. We think the VMEbus is the only design that meets both criteria and thus have made it a standard feature of every Stride 400 Series machine."



"The marketing pressure to be compatible instead of being better, has blinded the industry."

Q: What are some of the other unique features of the 400 Series?

RC: "A surprising feature is compatibility. Everybody talks about it, but nobody does anything about it. Our systems are completely compatible with each other from the 420 model starting at $2900, through the 440, on to the powerful 460 which tops out near $60,000. Each system can talk to the others via the standard built-in local area network. Go ahead and compare this with others in the industry. You'll find their little machines don't talk to their big ones, or that the networking and multiuser are incompatible, or that they have different processors or operating systems, and so on."

Q: When you were still known as Sage Computer, you had a reputation for performance, is that still the case with the new Stride 400 Series?

RC: "Certainly, that's our calling card: 'Performance By Design.' Our new systems are actually faster; our standard processor is a 10 MHz 68000 running with no wait states. That gives us a 25% increase over the Sage models. And, we have a 12 MHz processor as an option. Let me add that speed isn't the only way to judge performance. I think it is also measured in our flexibility. We support a dozen different operating systems, not just one. And our systems service a wide variety of applications from the garage software developer to the corporate consumer running high volume business applications."

Q: Isn't that the same thing all manufacturers say in their ads?

RC: "Sure it is. But to use another over used-term, 'shop around'. We like to think of our systems as 'full service 68000 supermicrocomputers.' Take a look at everyone else's literature and then compare. When you examine cost, performance, flexibility, and utility, we don't think there's anyone else in the race. Maybe that's why we've shipped and installed more multiuser 68000 systems than anyone else."



STRIDE MICRO

Formerly Sage Computer

For more information on Stride or the location of the nearest Stride Dealer call or write us today. We'll also send you a free copy of our 32 page product catalog.

Corporate Offices:
4905 Energy Way
Reno, NV 89502
(702) 322-6868

Regional Offices:
Boston: (617) 229-6868
Dallas: (214) 392-7070

Alloy. We b

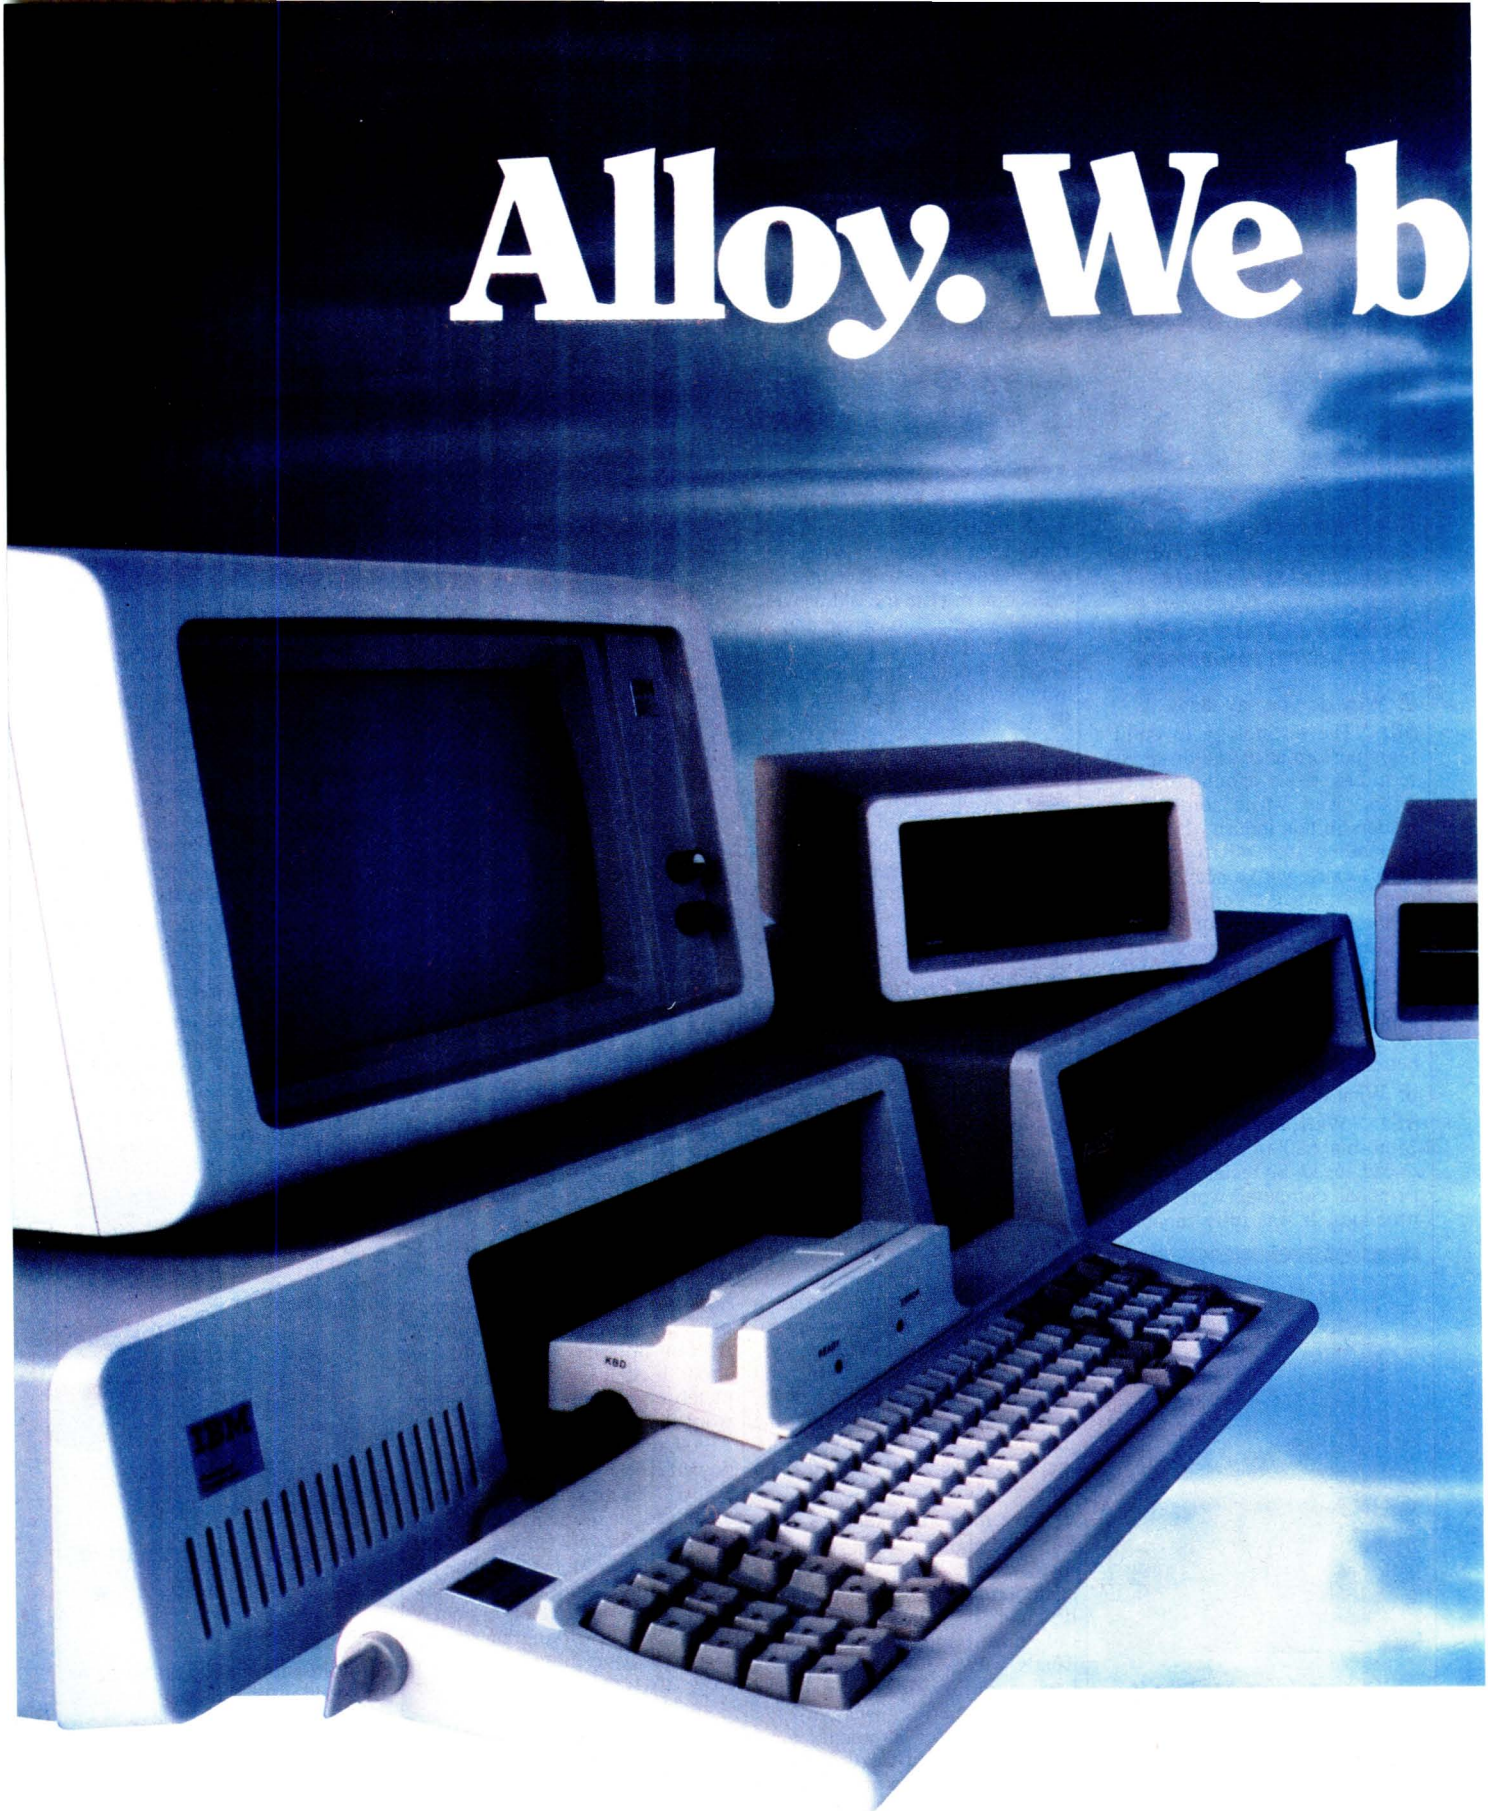

And AT&T, Columbia, Compaq, Corona, Eagle, TI Professional, and
QICSTOR-PLUS, PC-DISC, PC-BACKUP, PC-CARD, and PC-9 TRACK.

Alloy Computer Products, Inc., 100 Pennsylvania Ave., Framingham, Mass. 01701 (617) 875-6100, TWX: 710-346-0394



Zenith. With PC-QICTAPE, PC-STOR, PC-SLAVE/16, PC-QICSTOR,
See Alloy's full line of innovative products in action at your local dealer.

ALLOY
Computer Products, Inc.

Europe: Alloy Computer Products (Europe) Ltd., Cirencester, Gloucestershire, Eng. Tel: 0285-68709, Tlx: 43340

Inquiry 15

Get the Picture with PHOTOBASE

PHOTOBASE™

PHOTOBASE is a software package that works with data base management systems such as: dbase II, R:Base 4000* and the IBM Filing Assistant*.*



PC-EYE™

PC-EYE is a high speed, high resolution video digitizer board that lets you capture anything you can see.

Now you can open up a whole new dimension in data base applications by merging real-life pictures with popular data base management systems. Pictures of people, products, diagrams, maps, company logos — whatever you want to photograph — can be integrated with your data base. Consider these typical applications:

Security — verify those employees who have authorized clearance to limited access areas. A data base containing employee pictures and personnel records can be searched and displayed for visual verification.

Signature Verification — increase the efficiency of credit checks by adding pictures of customer signatures to your financial data base records.

Real Estate — add pictures of houses to on-line real estate listings for faster property identification and improved sales presentations.

Electronic Cataloging — pictures of products can be combined with a data base system containing product specifications, pricing, availability and much more.

Customers, distributors and sales personnel can quickly search data and view the resulting product/picture information on one screen. Files can be updated easily, quickly.

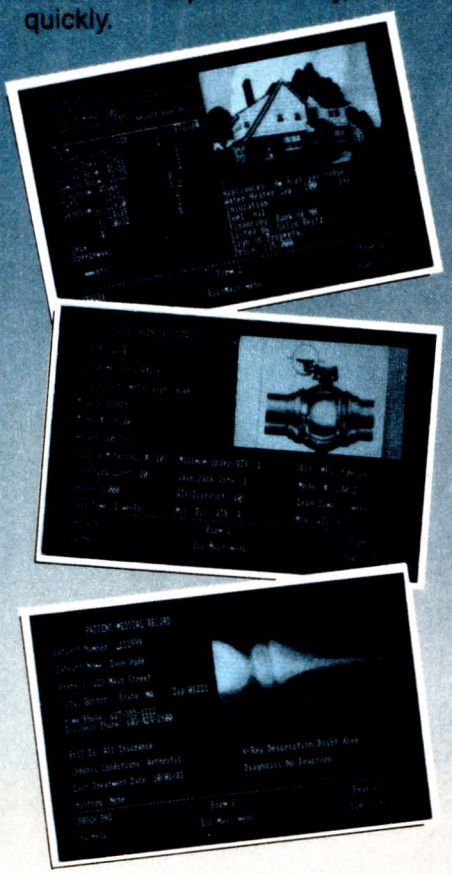

It's Easy

With a simple keystroke, pop-out of your data base system and into the PHOTOBASE menu. Capture images of text, photos, artwork and 3-dimensional objects with an ordinary video camera and our high resolution PC-EYE™ video digitizer. Pop back into your data base system and add the picture name to your data base like you would any other piece of information. The full functionality of the data base system is preserved, but the resulting display is text and picture information on one screen.

Pictures are displayed in the upper right quadrant of the screen at a resolution of 320 x 200 with 16 colors or levels of gray. Text information from data base records fills the rest of the screen. Pictures can also be exploded to full screen.

Call or write and we will send you information on PHOTOBASE, PC-EYE, compatible cameras and other imaging equipment in the Chorus Family of products.

(603) 424-2900 or 1-800-OCHORUS.

TM PHOTOBASE and PC-EYE are trademarks of CHORUS Data Systems.
*dBase II is a trademark of Ashton-Tate; R-Base 4000 is a trademark of Microrim, Inc.; IBM Filing Assistant is a trademark of International Business Machines Corporation.

Inquiry 53

CHORUS

CHORUS Data Systems, Inc., 6 Continental Blvd., P.O. Box 370, Merrimack, New Hampshire 03054

BY GREGG WILLIAMS

MICROSOFT MACINTOSH BASIC VERSION 2.0

More Mac support and true parameter-passing subprograms

Author's note: This article describes the features of the new version of Microsoft BASIC *for the Apple Macintosh, available for* $150. *Because it is based on a prerelease copy of the software involved, this article does not include any evaluation of the software's performance. Since the software's functionality had been "frozen" (i.e., no new features were to be added to the product), this article should be an accurate description of the software's content and structure. A full software review will follow sometime in the future.*

Microsoft Corporation released a version of its BASIC for the Apple Macintosh computer shortly after the machine's release. Although this version used few of the Macintosh's special features (windows, pull-down menus, etc.), it became popular, largely because it was the only BASIC available. (Apple's Macintosh BASIC, as of this writing, was still not available.)

Microsoft recently introduced Microsoft BASIC version 2.0 (I'll abbreviate Microsoft BASIC for the Apple Macintosh as MBASIC 2.0 to contrast it with Apple's product, called Macintosh BASIC). Because most people are familiar with the generic Microsoft BASIC (which is similar to MBASIC version 1.0 for the Macintosh), I'll limit this description to those features that are new. MBASIC 2.0 is upward-compatible with programs and data files created using MBASIC 1.0. Figure 1 shows the List (program listing) window for an MBASIC 2.0 program and the contents of the Windows menu.

WINDOWS

The WINDOW statement lets you create and close (eliminate) windows, direct program output to one of several windows, and get information about a certain window (for example, its size or the position of the cursor in the active window). The number of windows in your program is limited only by the amount and usage of the Macintosh's memory.

In addition, the PICTURE ON statement causes a variable called PICTURE$ to accumulate, according to the manual, "a set of encoded Macintosh instructions which, together, produce a screen image." The

(continued)

Gregg Williams is a senior technical editor for BYTE. *He can be contacted at* POB 372, *Hancock,* NH 03449.

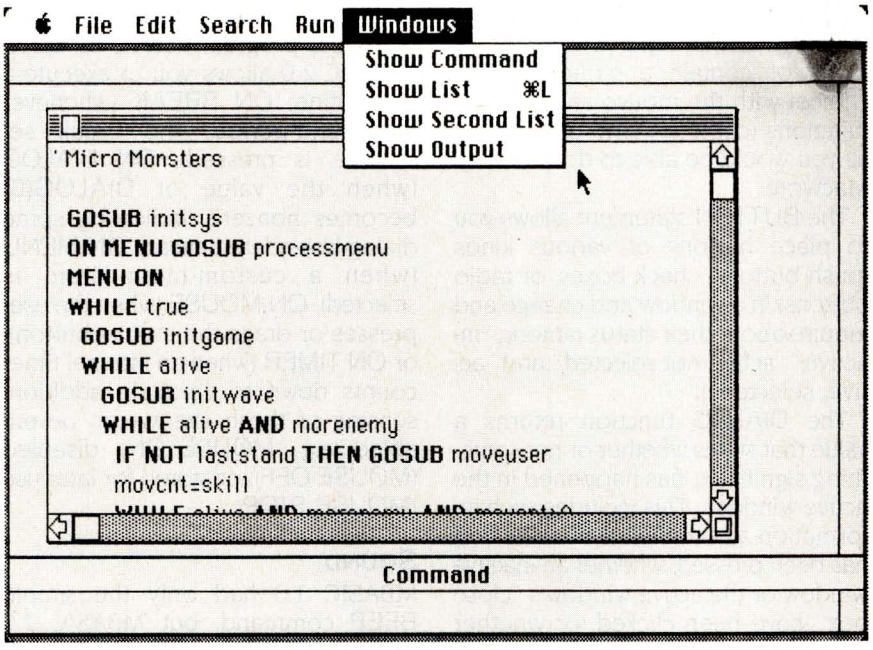

Figure 1: *Microsoft Macintosh* BASIC 2.0. *Note the lack of line numbers in the program and the selections in the new Windows menu.*

MBASIC 2.0 comes in two versions that use different floating-point-number formats but are otherwise identical.

programmer can use the stored value of this string to reproduce the contents of a window. With some additional programming, you can use this statement to create a program that redraws the contents of an output window when an obscuring window is removed. (MBASIC 2.0 automatically redraws List windows but not output windows.)

Edit Fields, Buttons, and Dialog Functions

The EDIT FIELD statement allows you to specify any rectangular area of an output window as an edit field. This lets the user of your program edit the contents of that field (which can be blank or contain a string of your choice) with the mouse and the edit functions (cut, copy, and paste)—just as you would be able to do with, say, MacWrite.

The BUTTON statement allows you to place buttons of various kinds (push buttons, check boxes, or radio buttons) in a window and change and inquire about their status (among "inactive," "active, not selected," and "active, selected").

The DIALOG function returns a value that states whether or not something significant has happened in the active windows. This includes such information as whether or not a button has been pressed, whether an inactive window or the active window's "close box" have been clicked, or whether a window needs to be refreshed.

With the above statements and the WINDOW statement, you can create windows that refresh their contents when needed and windows that look and behave like standard Macintosh alert and dialog boxes.

Menu Bars

The MENU statement lets you create up to 10 custom menus, each with up to 20 items; menu items can be inactive, selected, or selected and marked with a check box. MBASIC 2.0 makes no provision for a Command-key sequence to substitute for a menu item (like, for example, Command-C to substitute for the menu item "Cut"). The MENU function returns the values of the menu and item numbers of the last menu selection made.

Event Trapping

The numerous event-trapping statements let you control your program via various events without tedious programming—things like mouse clicks, button and menu selections, and window activations. These functions are the "glue" that will usually hold together a BASIC program that makes heavy use of the Macintosh user interface.

In addition to the ON ERROR GOSUB *nnnn* from MBASIC 1.0, which executes the subroutine at line *nnnn* when the program detects an error, MBASIC 2.0 allows you to execute a subroutine: ON BREAK (whenever Command-period, the break sequence, is pressed), ON DIALOG (when the value of DIALOG(0) becomes nonzero, indicating some dialog-box-related event), ON MENU (when a custom-menu item is selected), ON MOUSE (when the user presses or drags the mouse button), or ON TIMER (when an internal timer counts down to zero). In addition, sensing of these events can be enabled (e.g., MOUSE ON), disabled (MOUSE OFF), or stored for later use (MOUSE STOP).

Sound

MBASIC 1.0 had only the simple BEEP command, but MBASIC 2.0 adds a SOUND command that lets you control the tone and length of up to four sound generators. In addition, sound commands (to an unspecified limit) can be queued up with the SOUND WAIT command, then released with SOUND RESUME; this allows you, for example, to set up and then play several sound generators in synchronization.

Another statement, WAVE, lets you use waveforms other than the default (a square wave). The parameter SIN specifies a sine wave; 256 elements from a selected integer array specifies any other arbitrary waveform. While the use of a single square-wave sound generator may slow program execution about 2 percent, the use of multiple arbitrary waveforms can cut execution speed by more than 50 percent.

Two Versions

Microsoft has made the unprecedented move of supplying *two* versions of MBASIC 2.0, which use different floating-point-number formats but are otherwise identical. The BCD (binary-coded decimal) version is better for business and financial programming because it eliminates the rounding errors that sometimes occur when using binary floating-point arithmetic (the kind used by most BASICs). This version is compatible with programs and data files created by MBASIC 1.0 and defaults to double precision for numeric values. The binary version of MBASIC 2.0 (which adheres to the IEEE floating-point-number standard) is faster than the BCD version because it defaults to single precision for numeric values and for the calculation of transcendental functions. The binary MBASIC 2.0 icon and BASIC program icons show a small flowchart and a pi symbol. (The decimal-version icons look like their counterparts that are found in MBASIC 1.0.)

Editing and Debugging

MBASIC 2.0 adds a number of much-needed editing and debugging features. Find and find-and-replace menu selections automate the tedious process of looking through a program listing for things that need to be changed. A find-the-cursor menu

(continued)

COMPUTER WAREHOUSE

CALL TOLL FREE 1-800-528-1054

PRINTERS

Anadex
9625B ... $1129
WP6000 ... $2039
DP6500 ... $2259

Brother
DX-15 ... $369
HR-25 ... $649
HR-35 ... $875

C-Itoh
A10-20 ... $459
F-10 Parallel or Serial ... $909
55 CPS Serial or Parallel ... $1189
8510 Parallel (Prowriter) ... $315
8510 SP ... $435
8510 SCP ... $509
8510 BPI ... $335

Comrex
CR-2 Parallel ... $339
CR-2 Serial ... $499
CR-2 Keyboard ... $129
CR-4 ... Call
420 ... Call

Datasouth
DS180 ... $1149
DS220 ... $1469

Diablo
620 ... $694
630 API ... $1499
630 ECS ... $1669
630 ECS/IBM ... $1669
Series 36 ... $1139
80 IF ... $2649
P12CQI ... $529
P32CQI ... $759
S32CQI ... $839
P38 ... $1639
S38 ... $1719
C150 ... $999

Epson All Printer Models ... Call

Inforunner
Riteman ... $249

Juki
5500 ... Call
6100 ... Call
6300 ... Call

NEC
2010, 2015, 2030 ... $639
2050 ... $669
3510, 3515, 3530 ... $1215
3550 ... $1359
7710, 7715, 7730 ... $1649
8850 ... $1779
P2, P3 ... Call

Okidata All Printer Models ... Call

Panasonic
1091 ... $299
1092 ... $445
1093 ... Call

Silver Reed
EXP400 ... $245
EXP500 Parallel ... $339
EXP500 Serial ... $339
EXP550 Parallel ... $399
EXP550 Serial ... $399
770 Parallel ... $789
770 Serial ... $789

Star Micronics
All Printer Models ... Call

Tally Spirit 80 ... $245

Toshiba
P1340 Parallel or Serial ... $709
P1351 Parallel or Serial ... $1249

PLOTTERS

Enter
Sweet-P600 ... $780

SPECIALS OF THE MONTH

COLUMBIA COMPUTERS

All systems include fifteen software packages with a $3,200 value.

MPC4210 MPC4220
MPC4610 MPC4620 Columbia VP

PRICED TOO LOW TO PRINT

Call for Prices.

VIDEO TERMINALS

ADDS
A-2 Green ... $469
A-3 ... $469
Viewpoint 60 ... $485
Viewpoint 90 ... $849

Altos
Smart II ... $699

Qume
QVT 102 Green ... $399
QVT 102 Amber ... $419
QVT 103 Green ... $816
QVT 103 Amber ... $850
QVT 108 Green ... $449
QVT 108 Amber ... $519

Televideo
910 ... $439
910+ ... $559
914 ... $515
924 ... $635
925 ... $700
950 ... $905
970 ... $985
800A (User Station) ... $979
Personal Terminal ... $385

Wyse
50 ... $489
75 ... $565

Zenith Z-29 ... $599

MODEMS

Anchor Automation
Mark XII ... $239

Hayes
Smartmodem 300 Baud ... $189
Smartmodem 1200 Baud ... $459
Smartmodem 1200B Baud (IBM) ... $389
Micromodem IIE (Apple) ... $214

Novation Smart Cat Plus ... $315

Racal-Vadic All Models ... Call

US Robotics Password 1200 ... $319

COMPUTERS

Altos All Computer Models ... Call

Columbia ... Call

Leading Edge Personal Computer ... Call

NEC
PC-8201 Computer ... $315
PC-8201A-90 Battery Pack ... $15
PC-8206A 32K Ram ... $215
PC-8271A-01 AC Adapter ... $16
PC-8271A-02 AC Adapter ... $16
PC-8281A Recorder ... $89

Northstar
All Computer Models ... Call

Sanyo MBC-775 Portable ... Call
MBC-550 System ... Call
MBC-555 System ... Call
MBC-550-2 System ... Call
MBC-555-2 System ... Call
MBC-885 ... Call

Televideo
802 H ... $4285
803 ... $1765
803H ... $2850
806/20 ... $4640
TPC-1 ... $869
TPC-2 Dual Drive ... $1749
TPC-2 Single Drive ... $1509
1605 ... $1729

Zenith
Z-150 Single Drive ... Save 25%
Z-150 Dual Drive ... Save 25%
Z-150 W/10 Megabyte ... Save 25%
Z-160 Single Drive ... Save 25%
Z-160 Dual Drive ... Save 25%

DISKETTES

Maxell
MD-1 (Qty 100) ... $175
MD-2 (Qty 100) ... $225

MONITORS

Amdek All Monitors ... Call

Princeton Graphic
HX-12 ... $479

Sanyo
CRT-30 ... $99
CRT-36 ... $149
CRT-50 ... Call
CRT-70 ... $549

Taxan
121 Green ... $125
121 Amber ... $134
420 RGB ... $399
425 RGB/Green ... $410

Visual
Commuter ... From $1469

Zenith
ZVM-122 Amber ... $95
ZVM-123 Green ... $95
ZVM-124 ... $129
ZVM-133 Color/RGB ... $410
ZVM-135 Color/RGB W/Audio ... $459

DISK DRIVES

Iomega
Bernoulli Box for IBM
10 Megabyte ... $1950
20 Megabyte ... $2660

Rana
Elite I ... $215
Elite II ... $340
Elite III ... $410
Controller (W/Drive Only) ... $69
1000 W/DOS for Atari ... $305

TEC MAR

Graphics Master ... $449
126K Dynamic Memory ... $225
256K Dynamic Memory ... $299
Captain 128K ... $299
Captain 256K ... $399

GEMINI 10X or 10XPC with Cable & Paper

Super Price CALL

COMPUTER WAREHOUSE

Order Line: 1-800-528-1054
Order Processing & Other Information: 602-954-6109

2222 E. Indian School Rd.
Phoenix, Arizona 85016

AMERICAN EXPRESS

Store Hours: Mon-Fri 10-5:30 Saturday 9-1
Order Line Hours: Mon-Fri 8:30-5:30 Saturday 9-1

VISA MasterCard

Prices reflect 3% to 5% cash discount. Product shipped in factory cartons with manufacturer's warranty. Please add $8.00 per order for UPS shipping. Prices & availability subject to change without notice. Send cashier's check or money order...all other checks will delay shipping two weeks.

11/84

selection allows you to scroll through your program and return to your original location without the trial and error that you previously had to do. You can also do full Macintosh-style editing in the List window; this is a great improvement over MBASIC 1.0, which forces you to copy a BASIC line to the command window for editing.

Another improvement is that MBASIC 2.0 allows you to make only two List windows. In MBASIC 1.0 you can have three List windows open, which wastes memory.

MBASIC 2.0 adds a single-step capability to the TRON and TROFF statements available in MBASIC 1.0. Single-stepping, which is invoked using the Step selection under the Run menu (or by pressing Command-T), causes MBASIC 2.0 to execute one statement and highlight it in the List window (if it is visible). Note that only one statement is executed; if a line contains multiple statements, only the current one is highlighted.



New Language Features

The Macintosh-environment enhancements to MBASIC 2.0 are certainly exciting, but Microsoft has made improvements to the BASIC language itself that are actually more important. None of these features are new to BASIC itself, but their inclusion in a Microsoft BASIC tends to ensure their inclusion in future Microsoft BASICs, which will probably set a de facto standard for the microcomputer community. The new features, which include program-format changes and subprograms that pass parameter values, rectify most of the shortcomings that programmers have against the language and make it a serious competitor to Pascal for many users.

The criticism of BASIC as an unreadable, monolithic language is largely due to its lack of formatting (indenting lines to clarify, for example, the body of a DO loop) and its requirement of line numbers. MBASIC 2.0 programs are stored as they are typed in—this includes any cosmetic use of spaces, even blank lines. MBASIC 2.0 requires line numbers—or, equivalently, alphanumeric labels delimited by colons—only when needed to specify the destination of GOTOs, GOSUBs, or IF-statement branches. MBASIC 2.0 also converts BASIC keywords (which may be entered in lowercase) to uppercase and boldface in the List window.

The subprogram (delimited by SUB and END SUB statements) differs from the subroutine in that the former can pass values from the calling statement to the subprogram definition; this feature greatly increases the power of the language and is a part of most sophisticated programming languages (FORTRAN, Pascal, and Modula-2, among others). The vari-

(continued)

Inquiry 7

The Hard Disk With The Software Shell

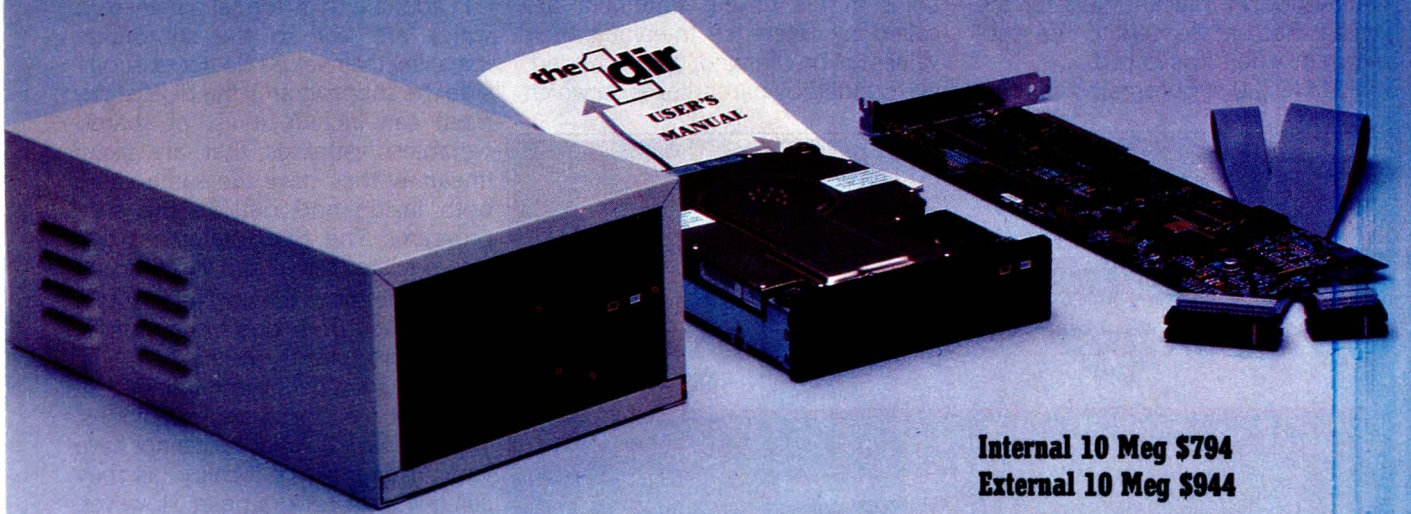

Internal 10 Meg $794
External 10 Meg $944

Why pay more for 10 or 20 Meg drives than you have to? Our 10 Meg internal hard disk subsystem is priced at $794, with the 20 Meg model going for $1288. Our external 10 Meg goes for $944, 20 Meg for $1438.

Our drives are fully compatible with any IBM PC or PC-compatible with 64K RAM and PC-DOS 2.0 or later.* Qubie' drives boot directly from the hard disk. You can power up the PC and load the system directly, without using any floppy disks. No software patches or drivers to install.

Using the same amount of power as a floppy drive, the Qubie' hard disk uses less energy than other aftermarket drives.



The drives come complete with 1dir software. 1dir's commands are in English, eliminating the need to type in DOS commands, and are all selected by using cursor control keys. 1dir even explains commands with HELP screens that give you on-line advice when you need it.

Qubie' drives are made of special plated recording media. They withstand the vibration and movement that has damaged hard disks in the past. In fact, Qubie' drives have been selected by several computer makers for use in their portable computers.

Good service starts with answering your questions before and after you buy. It continues with same or next day shipment of your order. Since we only sell a few selected products, we have the information and inventory to help you fast.

We perform repairs in our own service department within 48 hours, should you ever need service during the one year warranty period.

Our price is the whole price. All prices include UPS surface charges and insurance. In a hurry? Two day UPS air service is just $12.

Corporations, dealers and institutions, call for volume purchase price information.

*Call for information.

No Risk Guarantee
If you are not completely satisfied with your purchase, you may return it within 30 days for a full refund, including the cost to send it back. If you can get any of our competitors to give you the same guarantee, buy both and return the one you don't like.

Order Today, Shipped Tomorrow!
For fastest delivery, send cashiers check, money order, or order by credit card. Personal checks, allow 18 days to clear. California residents, add 6% sales tax.
Hours: Mon.-Fri. 8:00 a.m.-6:00 p.m. PST
Sat. 9:00 a.m.-1:00 p.m. PST

(800) 821-4479
Toll Free Outside California

(805) 987-9741
Inside California

QUBIE'

4809 Calle Alto
Camarillo, CA 93010

London (01) 223-4569
Paris (01) 321-5316
Sydney (02) 579-3322

© Qubie' 1984

Inquiry 292

ables used in the SUB statement are called *formal* (or *dummy*) *parameters* because they are not actual variables that can conflict with variables of the same name elsewhere in the program—they are placeholders for the values that are passed to the subprogram when it is called.

MBASIC 2.0 subprograms support call-by-reference and call-by-value parameter passing (in the latter, the subprogram *cannot* change the value of the variable used as a parameter in the calling statement). Simple variables in the calling statement are called by reference (meaning their values *can* be changed) unless they are surrounded by parentheses, in which case they are called by value. Calling statements can pass array names as parameters, and the size of the array does *not* have to be declared in the definition of the subprogram.

In addition to its formal parameters, which are *local* to the subroutine (meaning their values do not exist outside the subprogram), the SUB statement can include a list of shared variables, variables that are *global* (meaning they have the same value both inside and outside the subprogram). The SUB statement can also declare that all the variables inside it are *static*; the variables retain their values from one invocation of the subprogram to the next.

Subprogram definitions cannot contain other subprogram definitions. This means that variables cannot have varying degrees of locality (as they can in Pascal, for example). However, you can limit the scope of some variables by defining them as shared with some subprograms but not others.

A subprogram can be called either by its own name or with the CALL statement (which is also used to call machine-language subroutines). For example, if a subprogram is defined with

```
SUB POLY_AREA
   (SIDES,LENGTH,RESULT)
```

it can be called as

```
CALL POLY_AREA(5,12,area)
```

or as

```
POLY_AREA 5,12,area
```

(note the lack of parentheses in the latter case).

Documentation

The MBASIC 1.0 reference manual has 215 pages; the MBASIC 2.0 manual has 378 pages, which includes examples of almost every feature described. For example, the "Access to Macintosh ROM Routines" appendix is five pages in the first manual and eleven pages in the second (which documents the same number of routines, only in greater detail). The MBASIC 2.0 documentation spells out

(continued)

Graphics Takes A Quantum Leap Forward!



THE INOVION PERSONAL GRAPHICS SYSTEM FEATURES:

- The most advanced color mapping capabilities available.
- 250,000 simultaneously displayable colors.
- A palette of 2.1 million colors.
- Frame Grabber/Digitizer to capture TV, VCR or Video Camera pictures.
- Quality three dimensional texture capabilities.
- Built in Icon/Menu software.
- Completely Mouse/Trackball driven
- Fonts, Brushes, Microscope, Patterns, and Rotations.
- A complete stand alone system.
- A 19" enhanced color monitor.
- 780K Graphics Memory.
- 512 x 480 pixel display with 24 bits per pixel.
- RS232C port allows access to all system functions and memory.
- NTSC composite video and NTSC RGB signal.
- 1 year warranty on graphics generator and 90 day warranty on enhanced monitor.
- Special introductory 30 day satisfaction guarantee.
- **ONLY $3,495 complete*.**

* Introductory Price

INOVION
195 East Gentile Street
Layton, Utah 84041
(801) 546-2850

Inquiry 172



National Instruments takes the GPIB to the second power and beyond.

Unsurpassed customer support is as close as your phone.

National Instruments is the only company that is solely dedicated to developing, manufacturing and supporting a comprehensive line of IEEE-488 interfaces for a variety of computer systems. Because GPIB hardware and software is our only business, we can take customer support to a level that is unsurpassed in the industry.

Our customer telephone support service includes installation and operational assistance for all National Instruments' GPIB products. All you have to do is call 1-800-531-GPIB for comprehensive advice on installing and using our GPIB hardware and software. This toll-free number gives you access to 100+ man-years of GPIB and instrumentation experience—every weekday, coast to coast.

We'll help you work with any GPIB from any manufacturer.

National Instruments has the in-depth knowledge required for comprehensive system support. We've provided GPIB interfaces for ten different computer architectures, from the DEC VAX to the IBM-PCjr, and we've worked with many operating systems, including several flavors of UNIX. With this unparalleled level of experience, National Instruments now offers installation and application support on *any* GPIB interface, from *any* manufacturer, as well as assistance with applications development software.



It takes experience to make IEEE-488 systems work with nearly 3,000 instruments available from more than 200 different manufacturers, and experience is what enables National Instruments to take the GPIB to the second power and beyond.

The GPIB↔PC² works with an entire range of PC products with no complications.

The National Instruments GPIB↔PC² transforms your IBM PC, PC XT, PC AT, PCjr, AT&T, Compaq, Texas Instruments Professional, DEC Rainbow or comparable personal computer into a reliable, easy-to-use personal instrumentation workstation. National Instruments software for these products includes system software for interfacing the board to the operating system, development tools, language support and applications packages.

With the National Instruments GPIB↔PC², there are no frustrations or unpleasant surprises when you integrate PC options in one of the many IBM "compatibles." A comprehensive program evaluating product compatibility and optimizing our software insures that our GPIB↔PC² products will work as well with an AT&T as with an IBM PC.

2 Your personal guarantee of unsurpassed customer support and satisfaction. CALL 1-800-531-GPIB for instant access to 100+ man-years of GPIB experience.

DEC, VAX and Rainbow are trademarks of Digital Equipment Corp. IBM PC, PCjr, PC XT and PC AT are trademarks of International Business Machines. Compaq is a trademark of Compaq Corp. UNIX is a trademark of Bell Labs. GPIB↔PC² is a trademark of National Instruments.

NATIONAL INSTRUMENTS
12109 Technology Blvd.
Austin, Texas 78727 512/250-9119

Inquiry 252

Inquiry 198

Once you choose Lattice, our friends will C you through...

LATTICE INC.: LATTICE WINDOWS, CURSES UNIX SCREEN CONTROL LIBRARY, C-FOOD SMORGASBORD, dB-C ISAM COMPATIBLE WITH dBASE II AND III... **LIFEBOAT ASSOCIATES:** FLOAT 87 8087 SUPPORT PACKAGE, HALO GRAPHICS PACKAGE, PANEL SCREEN LIBRARY... **GREENLEAF SOFTWARE:** THE GREENLEAF C FUNCTIONS... **C SOURCE:** BASIC_C C FUNCTIONS FOR BASIC USER... **SOFTCRAFT:** BTRIEVE ISAM FILE SYSTEM, BTRIEVE ISAM NETWORK FILE SYSTEM... **BLAISE COMPUTING:** TOOLS, TOOLS2, VIEW MANAGER SCREEN PACKAGE... **MORNING STAR SYSTEMS:** PROLIBRARY, PROSCREEN... **CREATIVE SOLUTIONS:** WINDOWS FOR C... **NOVUM ORGANUM:** C POWERS PACKS, MATHEMATICS POWER PACKS, ADVANCED POWER PACKS, DATABASE POWER PACKS, TELECOMMUNICATIONS POWER PACKS W/ SOURCE... **PHACT ASSOCIATES:** PHACT ISAM LIBRARY... **RAIMA CORPORATION:** db_ VISTA DBMS... **PHOENIX:** PLINK86, PFIX86... **RELATIONAL DATABASE SYSTEMS:** C-ISAM FILE ACCESS METHOD... **MINDBANK:** V-FILE VIRTUAL MEMORY/FILE SYSTEM... **HUNTER & READY:** VRTX C INTERFACE LIBRARY... **GRAPHIC SOFTWARE SYSTEMS:** GSS DRIVERS, GSS TOOLKIT KERNEL SYSTEM... **OPT-TECH DATA PROCESSING:** OPT-TECH SORT... **ACCUDATA SOFTWARE:** C-TREE ISAM, C-SORT SORT... **TRIO SYSTEMS:** C-INDEX+ ISAM... **COMPU CRAFT:** c VIEW FORMS/WINDOW MANAGEMENT... **SCIENTIFIC ENDEAVORS:** GRAPHIC PRESENTATION SCIENTIFIC GRAPHICS... **LEMMA SYSTEMS, INC.:** C LIBRARY... **ESSENTIAL SOFTWARE, INC.:** C UTILITY LIBRARY... **SOFTWARE LABS:** C UTILITIES PACKAGE... **FAIRCOM:** C-tree BY FAIRCOM ISAM WITH SOURCE

Contact Lattice to learn how we can help your C program development.

LATTICE®

P.O. Box 3072
Glen Ellyn, IL 60138
312/858-7950
TWX 910-291-2190

LET
db_VISTA
Manage Your Data

CALL TOLL-FREE 1-800-843-3313 AT THE TONE 700-992

The First DBMS Designed Exclusively for C Language Applications Development

Faster and better than ISAMs, file handlers, even end-user DBMS's. POWER like a mainframe DBMS, PRICE like a microcomputer utility, PORTABILITY like only C provides.

- **Written in C, under Unix.**
- **Minimal data redundancy using the network database model.**
- **Virtual memory disk accessing.**
- **Fast B*-tree indexing method for key files.**
- **Multiple key records – any or all data fields may be keys.**
- **NOW INCLUDES SOURCE CODE AND FULLY PAID RUN-TIME LICENSE.**
- **Three month extended applications support included.**
- **PC-Write word processor/text editor included at no charge.**

30-DAY MONEY-BACK GUARANTEE

db_VISTA versions		
MS-DOS:	Lattice	$495
	DeSmet	495
	Computer Innovations	495
	Aztec	495
UNIX:	Fortune 32:16	495
	Altos 586	495
	HP 9000/200 & 500	495
db_VISTA Manual		15
Development Packages		
	Lattice C w/db_VISTA	$795
	Lattice C only	395
	DeSmet C w/db_VISTA	595

RAIMA CORPORATION

11717 Rainier Avenue South
Seattle, WA 98178
206/772-1515

Special REDUCED price through January 31–$295

Inquiry 297

the language's functions more completely, which allows most of us to more fully use the language without having to be wizards that understand the inner workings of the Macintosh.

Miscellaneous Features

MBASIC 2.0 contains too many other improvements to mention here, but some notable ones follow.

You can now load in BASIC files using the "Open..." menu selection (which gives you the scrolling window display known as the Mini-Finder). Because the Mini-Finder has a "Disk" button, you can load (without knowing the names of) files from your system's alternate disk drive.

MBASIC 2.0 allows you to cut and paste pictures between it and an external application (MacPaint, for example). This allows you to draw a picture using MacPaint, then manipulate it within an MBASIC 2.0 program.

You must interrupt a running MBASIC 2.0 program with the Command-period keystroke instead of Command-C. This makes MBASIC 2.0 consistent with other Macintosh applications and frees the Command key to be used (as in a terminal-emulation program) as a control key.

The FILE$ function allows a program to prompt the user for a filename using either a fill-in-the-blank dialog box (as is used by MBASIC 1.0 itself to get a filename) or the Mini-Finder dialog box mentioned above. Both forms let you specify an optional prompt string, which allows you to use this statement to get something other than a filename.

Closing Remarks

This product description makes no attempt to evaluate the performance of MBASIC 2.0. By the time you read this, Microsoft BASIC for the Apple Macintosh version 2.0 (called MBASIC 2.0 in this article) and Apple Computer's own Macintosh BASIC should be available. We will compare the published versions of both BASICs as soon as they are available. In any case, MBASIC 2.0 is a considerable improvement over its predecessor, Microsoft Macintosh BASIC 1.0. ■

NO GUTS, NO GLORY.

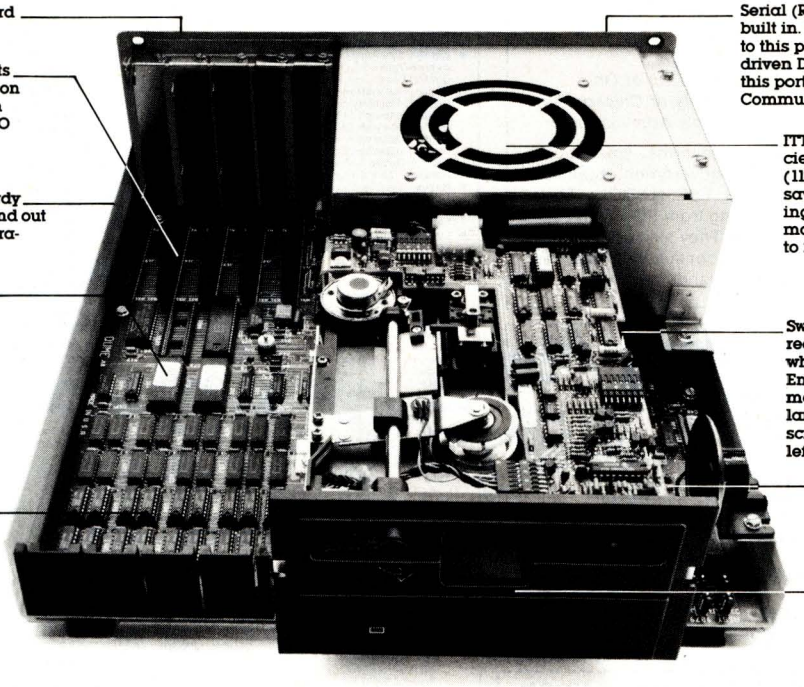

Parallel port included. Standard interface for popular printers.

Five full-length expansion slots for IBM PC/XT compatible option cards. Hard disk machine with 640K, real time clock, three I/O ports and display has two slots free.

Small overall dimensions, sturdy metal case, designed inside and out with horizontal or vertical operation in mind.

ROM BIOS AND MONITOR by ITT: Interrupt compatible with IBM PC/XT and more. Ever-ready menu-driven, diagnostic monitor debugger. Test hardware device by device and channel by channel. Examine registers, alter or dump memory, read or write tracks and sectors. Even set drive timing.

256K byte, parity-checked RAM on planar board. Combo board with one, two and three banks of 128K bytes each. Real time clock and parallel port also available to give 640K RAM total with only one slot used.

Serial (RS-232) communications port built in. Console I/O may be redirected to this port by switch setting. Menu-driven DOS utility (set up) to configure this port or redirect printer I/O to it. Communications program included.

ITT's own heavy duty, high efficiency, switching power supply (115 watts continuous service) saves weight without compromising support for fully-equipped machines. 95 to 132 volts or 180 to 240 volts.

Switch controls allow console I/O redirection to serial port—use whatever ASCII terminal you want. Enable/disable power-on memory test for faster starts on large machines. Enable/disable screen-saving blanking when left idle.

Floppy disk controller on planar. Saves a slot.

Space-saving half-height disk drives.

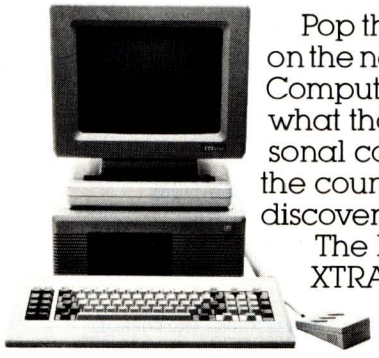

Monitor conveniently tilts and swivels. Green, amber or color. Three-position keyboard. Our very own, fully-supported ITT Mouse.

Pop the rugged metal case on the new ITT XTRA™ Personal Computer and you'll find what thousands of our personal computer users across the country have already discovered.

The beauty of the ITT XTRA Personal Computer is definitely more than skin deep.

In fact, it runs all the way down to the very last power supply winding.

This is one of the most cleanly designed, most extraordinarily simple machines to come along in quite awhile.

We modestly consider it the finest personal computer compatible on the market.

An example. Where IBM has BIOS support routines for its BASIC, we have a ROM monitor and diagnostics utility that's always available, provides direct disk access and isolates problems right down to the chip level.

It's a finely crafted, expertly engineered machine that's predictable, reliable and a pleasure to use.

We've taken great pains to provide all the right guts.

We leave all the glory to you.

ITT
PERSONAL COMPUTERS

IBM PC and XT are registered trademarks of International Business Machines.

HELPING AMERICA WORK SMART.

For more information, or the location of your nearest ITT authorized dealer, call 1-800-321-9872.

© 1984, ITT Information Systems

Inquiry 403 for Dealers. Inquiry 404 for End-Users.

PC NETWORK

BUY HARDWARE AND SOFTWARE AT WHOLESALE +8%, AND GET 14-28 DAY SOFTWARE RENTALS† . . .

In just the last few months, *The NETWORK* has saved its members more than $18,000,000 and processed over 45,000 orders.

Listed below are just a few of the over 20,000 products available at our EVERYDAY LOW PRICES! All software below is priced in IBM-PC format.

The nation's largest corporations depend on PC NETWORK!

On our corporate roster are some of the nation's largest financial industrial and professional concerns ***including some of the most important names in the computer industry:***

AT&T
Barclays Bank
Bell & Howell
Citibank
Columbia University
Data General
Farm Bureau Insurance
Frontier Airlines
General Mills
Gillette
Harvard University
Hewlett Packard
Hughes Aircraft
IBM
ITT
Kodak
Multimate
Standard Oil of Ohio
University of Chicago
Veteran's Administration

plus thousands of satisfied consulting firms, small businesses, user groups, municipalities, government agencies and valuewise individuals ACROSS THE NATION! Their buyers know that purchasing or renting from PC NETWORK saves them time, money and trouble. They also count on us for product evaluation, professional consultation and the broadest spectrum of products and brands around.

CALL TOLL FREE 1-800-621-S-A-V-E

In Illinois call (312) 280-0002

Your Membership Validation Number: B315

NEW HOLIDAY HOURS
M-F 7:30 AM—9:00 PM CST
SAT 9:00 AM—7:00 PM CST

You can validate your membership number and, if you wish, place your first money-saving order over the phone by using your VISA, MASTERCARD or AMERICAN EXPRESS. Our knowledgeable service consultants are on duty Mon.-Fri. 7:30 AM to 9 PM, SAT. 9 AM to 7 PM CST.





PERSONAL COMPUTER NETWORK
320 West Ohio
Chicago, Illinois 60610

Call now . . . Join the PC NETWORK and start saving today!

PC NETWORK • MEMBERSHIP APPLICATION

YES! Please enroll me as a member in the PC NETWORK™ and rush my catalog featuring thousands of computer products, all at just 8% above DEALER WHOLESALE PRICES. I will also periodically receive "THE PRINTOUT", a special up-date on merchandise at prices BELOW even those in my wholesale catalog, and all the other exclusive, money-saving services available to Members. **315** ☐

I am under no obligation to buy anything. My complete satisfaction is guaranteed. Please check (✓) all boxes that apply:

Basic Membership
- ☐ One-year membership for $8
- ☐ Two-year membership for $15 (SAVE $1)
- ☐ Business Software Rental Library for $25 add'l. per year—with 14 day rentals
- ☐ Games Software Rental Library for $10 add'l per year

Special V.I.P. Membership*
- ☐ One-year membership for $15
- ☐ Two-year membership for $25 (SAVE $5)
- ☐ BOTH Business and Game Software Rental Libraries for $30 add'l per year—with 28 day rentals

*VIP members receive advance notice on limited quantity merchandise specials

☐ Bill my credit card ☐ VISA ☐ MasterCard ☐ American Express

Account Number: ☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐

Exp. _____ mo. _____ year

☐ Check or money order enclosed for $ _____

Name _____

Address _____ Apt. No. _____

City _____ State _____ Zip _____

Telephone ( ) _____

My computer(s) is: ☐ IBM PC ☐ IBM-XT ☐ IBM-AT ☐ Apple II ☐ Macintosh ☐ Other _____

Signature _____
(Signature required to validate membership)

Copyright © 1984, PC NETWORK, INC.

GAMES & EDUCATIONAL SOFTWARE

(Please add $1 shipping and handling for each title ordered from below.)

	Wholesale
Avant-Garde *Air Traffic Controller*	$ 16.50*
Bluebush *Chess (Your Toughest Opponent)*	34.00*
Broderbund *Lode Runner*	19.75*
CBS *Goren-Bridge Made Easy*	48.00*
CBS *Mastering the SAT*	81.00*
Epyx *Temple of Apshai*	21.97*
Infocom *Zork 1 or Witness*	21.50*
Infocom *Deadline, or Suspended*	27.00*
Microsoft *Flight Simulator*	27.00*
Orion *JBird (QBert Look Alike)*	22.00*
Scarborough *Mastertype*	27.00*
Screenplay *Asylum (works with mono card too)*	15.50*
Sierra On-Line *Frogger*	$ 21.00*
Sierra On-Line *Crossfire*	18.00*
Sublogic *Night Mission Pinball*	24.00*
Spinnaker *Alphabet Zoo*	17.00*
Spinnaker *Delta Drawing*	29.00*
Spinnaker *FaceMaker*	20.00*
Spinnaker *Hey Diddle Diddle*	17.00*
Spinnaker *KinderComp*	17.00*
Spinnaker *Rhymes & Riddles*	17.00*
Spinnaker *Story Machine*	20.00*
Spinnaker *Most Amazing Thing*	23.00*
Virtual Combinatics *Micro Cookbook*	21.00*

BUSINESS SOFTWARE

(Please add $2.50 shipping and handling for each title order from below.)

	Wholesale
ATI *How to use Multimate*	$ 42.00*
ATI *How to use Microsoft Word*	42.00*
ATI *How to use Lotus 1-2-3*	42.00*
► **Ashton-Tate** *DBase III*	347.50*
► **Ashton-Tate** *Framework*	347.50*
Ashton-Tate *Friday!*	158.00*
Central Point *Copy II PC*	23.00*
Conceptual Instruments *Desk Organizer*	177.00*
Cosmos Revelation *(requires 8087)*	575.00*
Digital Research *CP/M-86*	33.00*
Digital Research *DR Logo*	57.00*
Digital Research *PL/1 Compiler*	399.00*
Digital Research *Concurrent CP/M—Windows*	90.00*
Funk Software *Sideways*	36.00*
Harvard *Harvard Project Manager*	215.00*
► **Hayes** *Smartcom II—New VT100 Emulator*	68.00*
Human Edge *The Management Edge*	145.00*
Human Edge *The Sales Edge*	145.00*
Lattice *C Compiler*	270.00*
► **Lotus Development** *Lotus 1-2-3*	270.00*
Lotus Development *Symphony*	CALL
MicroRim *RBase 4000*	230.00*
Microsoft *C Compiler*	$275.00*
Microsoft *Word with Mouse—Latest Version*	255.00*
Microsoft *Multiplan*	105.00*
Monogram *Dollars & Sense*	CALL
► **Multimate** *Multimate (Latest Version)*	240.00*
Oasis *The Word Plus*	90.00*
Open Systems *P/O Sales A/R INV G/L A/P Team Mgr*	370.00*ea.
Real World *G/L A/P A/R P/R or OE/INV*	387.50*
Rosesoft *Prokey Version 3*	74.00*
Ryan McFarland *RM COBOL (Dev. System)*	570.00*
Samna *Samna III Word Processor*	325.00*
Satelite Software *WordPerfect*	225.00*
Softcraft *Fancy Fonts*	125.00*
Softstyle *SET-FX*	35.00*
Software Publishing *PFS: File*	72.00*
Software Publishing *PFS: Report*	64.00*
Software Publishing *PFS: Write*	72.00*
Software Publishing *PFS: Graph*	72.00*
TCS *Total Ledger*	440.00*
Verbatim *Desk Drive Analyzer*	25.00*

HARDWARE

(Please add shipping and handling charges found in italics next to price.)

COMPLETE SYSTEMS

Apple *Macintosh Base System*	$1,580.00*	*(34.12)*
Apple *Apple IIc*	860.00*	*(18.58)*
Apple *Apple IIe*	CALL	
Columbia *Desktop & Portable Systems*	CALL	
Compaq *All Models*	CALL	
Eagle *Desktop PC and Spirit Portables*	CALL	
IBM *PC Starter System 1 DSDD/ FDC/Color CD/Par Port/Monitor/64K*	1,620.50*	*(35.00)*
► **IBM** *PC Base System 2 DSDD/FDC-256K*	1,581.40*	*(34.16)*
► **IBM** *PC Professional Hard Disk (XT) (1 DSDD/FDC/10MB Hard Disk/256K)*	2,146.40*	*(46.36)*
IBM *PC/AT All Configs*	CALL	
► **Sayno** *MBC 550 "Lowest Cost Compatible"*	620.00*	*(13.39)*
► **Tava** *PC Complete IBM Compatible (64K Color or Mono Card/2 drives)*	1,375.00*	*(29.70)*
Texas Instruments *Professional*	CALL	

DISK DRIVES & CONTROLLERS

MMI *3" 10MB Low Power Winchester Mounts Like Half Height Drive*	$ 665.00*	*(14.36)*
Maynard *Floppy Disk Controller*	92.00*	*(2.50)*
► **Maynard** *WS-1 10MB Internal Hard Disk with Sandstar Multi Function Card*	770.00*	*(18.15)*
► **Maynard** *WS-2 same as WS-1 but with Sandstar Floppy Controller (uses 1 slot)*	930.00*	*(20.30)*
Maynard *Floppy Controller/Serial Port*	145.00*	*(2.50)*
► **Panasonic** *Half Height DSDD Drive Pair*	225.00*	*(5.40)*
PC Network *Half Height Drive Pairs Our Volume Lets us Import These Name Brand Drives Directly from the Source. They are the quietest, most reliable drives we've seen yet*	200.00*	*(4.32)*
Qume *Half Height DSDD Drive Pair (same as used on IBM Portable)*	350.00*	*(7.00)*
► **Tandon** *TM 100-2 Full Height DSDD Drive*	143.00*	*(3.09)*
► **Tandon** *10MB Internal Winchester w/IBM Controller*	675.00*	*(14.80)*
► **Taligrass** *20MB External Hard Disk with Tape Backup*	2,150.00*	*(46.44)*

MEMORY CHIPS

All chips guaranteed for life

64K Memory Upgrade Kits *(9 chips)*	$ 28.80*	*(1.00)*
64K Dynamic Ram Chips *(Each)*	3.20*	*(1.00)*
256K Dynamic Ram Chips *(Each)*	27.00*	*(1.00)*

MODEMS

Anchor *Mark XII LOWEST PRICE 1200BPS HAYES COMPATIBLE EXTERNAL MODEM!*	$ 230.00*	*(5.00)*
Hayes *Smartmodem 300*	180.00*	*(3.60)*
Hayes *Smartmodem 1200B with new Smartcom II VT100 Emulator*	366.90*	*(2.50)*
Rixon *R212A Stand Alone 1200PBS*	335.00*	*(8.50)*
U.S. Robotics *Password (Compact 1200BPS External)*	290.00*	*(6.50)*

MONITORS

Amdek *Video 300G Composite Green*	$ 110.00*	*(3.00)*
Amdek *Video 300A Composite Amber*	120.00*	*(3.00)*
Amdek *Video 310A IBM Type Amber*	130.00*	*(3.00)*
Amdek *Color 300 (NEW!) Composite*	215.00*	*(4.64)*
Amdek *Color 500 (NEW!) Composite/RGB/VCR*	320.00*	*(6.91)*
Amdek *Color 600 (NEW!) High Res RGB*	395.00*	*(8.53)*
Amdek *Color 700 (NEW!) Ultra High Res*	455.00*	*(9.83)*
Amdek *Color 710 (NEW!) 700 w/Non Glare/Long Phosphor*	485.00*	*(10.48)*
Princeton *HX-12 RGB Monitor*	CALL	
Princeton *MAX-12 IGB Mono*	CALL	
Princeton *SR-12 Ultra High Res RGB*	CALL	
► **Quadram** *Quadchrome II NEW! 640x200 RGB w/14" Screen/ Black Phosphor Mask/IBM Case*	370.00*	*(8.21)*
Taxan *420 Super High Res RGB Monitor*	380.00*	*(8.21)*
Taxan *440 Highest Res RGB (720x400) Currently Available Works With Persyst Bob Card*	525.00*	*(11.34)*
Zenith *ZVM-123 Green High Res Consumer Reports Rated Best Buy!)*	76.00*	*(2.50)*

MULTIFUNCTION CARDS

Apparat *256K Memory Board with OK Clock/star*	$ 67.00*	*(2.50)*
Apparat *Combo II w/ser/par/game/ Clock/star*	123.00*	*(2.50)*
AST *Six-Pack Plus with 64K*	229.00**	*(2.50)*
AST *MegaPlus II with 64K*	229.00*	*(2.50)*
AST *I/O Plus II*	105.00*	*(2.50)*
► **ORCHID BLOSSOM W/64K** *Multifunction with networking at an unbelievable price. Up to 384K/Ser/Par/ Clock/Software/Net Slot*	205.00*	*(2.50)*
Quadram *Improved Quadboard w/OK*	199.00*	*(2.50)*
Tecmar *Captain Multifunction Card O.K*	195.00*	*(2.50)*

PRINTERS

Amdek *5025 (NEW!) 25CPS LQ w/2K Buffer*	$ 525.00*	*(10.48)*
C. Itoh F10/40 *Starwriter 40 CPS LQ*	875.00*	*(18.90)*
C. Itoh *Prowriter 8510 AP*	285.00*	*(6.16)*
► **Epson** *RX-80*	220.00*	*(4.75)*
► **Epson** *FX-80*	370.00*	*(7.99)*
► **Epson** *FX-100*	525.00*	*(11.34)*
Epson *LQ1500*	CALL	
Epson *IBM-to-EPSON Parallel Cable*	21.00*	*(1.00)*
NEC *2030 20CPS LQ Parallel*	625.00*	*(13.50)*
► **NEC** *2050 20CPS Letter Quality Printer*	625.00*	*(13.50)*
NEC *3530 33CPS LQ Parallel*	1,185.00*	*(31.54)*
► **NEC** *3550 33CPS Leter Quality Printer*	1,260.00*	*(27.22)*
NEC *8850 55CPS LQ New Model IBM Version*	1,650.00*	*(35.64)*
► **Okidata** *ML84P 200CPS 132 Col*	620.00*	*(13.40)*
► **Okidata** *ML92P 160CPS 80 Col Printer*	350.00*	*(7.56)*
► **Okidata** *ML93P 160 CPS Wide Platen*	550.00*	*(11.88)*
► **Okidata** *2410P Pacemaker 350CPS*	1,640.00*	*(35.42)*
Okidata *IBM-to-Okidata Parallel Cable*	20.75*	*(1.00)*
Qume *Sprint 11/45 45CPS Letter Quality*	1,155.00	*(24.00)*
Qume *Sprint 11/90 90CPS Letter Quality New! Fastest Daisywheel Out!*	CALL	
Qume *IBM Cable and Interface (required)*	72.00*	*(1.00)*
► **Star Micronics** *Gemini 10X 120CPS w/Tractor Epson Graphics Compatible*	225.00*	*(4.86)*
► **Star Micronics** *Gemini 15X 10X Features w/132 Col*	325.00*	*(7.20)*
► **Star Micronics** *PowerType 18 CPS LQ Diablo Code Compatible*	300.00*	*(6.48)*
Texas Instruments *855 DP LQ w/Tractor*	716.00*	*(15.50)*
Toshiba *P-1340 80 Col Version of P-1351*	696.00*	*(15.03)*
Toshiba *P-1351 160/100 CPS Draft/LQ LQ Printer*	1,200.00*	*(25.92)*

VIDEO CARDS

► **Eagle** *Monochrome Display Card*	160.00*	*(2.50)*
Hercules *Color Card w/Parallel Port*	CALL	
► **Hercules** *Monochrome Graphics Cards*	298.00	*(2.50)*
► **Paradise** *New Modular Multidisplay Card*	255.00*	*(2.50)*
Persyst *Bob Card Ultra High Res Color Card with Mono Quality Text in Color*	365.00*	*(2.50)*
Quadram *Quadcolor I Color Card*	170.00*	*(2.50)*
STB *Graphix Plus II NEW! (simultaneous Mono Graphics & Color)*	295.00*	*(2.50)*

ACCESSORIES AND SUPPLIES

► **Brand Name DSDD Diskettes** *Guaranteed for Life!! Not Generic*	$ 16.00*	*(1.00)*
Curtiss *PC Pedestal II*	36.00*	*(2.50)*
► **Keytronic** *KB5151 Deluxe IBM Keyboard*	170.00	*(4.00)*
PC Network *Replacement 130 Watt IBM-PC Power Supply—Gives your PC (Old or New) the same capacity as an XT. Good for add in tape drives (without need for a piggyback unit) and large capacity disk drives.*	165.00*	*(3.56)*
WP Printer Paper *2600 Sheets Microfine Perfs (invisible when torn)*	17.00*	*(10.00)*

*PC NETWORK Members pay just 8% above the wholesale price, plus shipping. All prices reflect a 3% cash discount. Minimum shipping $2.50 per order.

†RENT BEFORE YOU BUY—Members are eligible to join The NETWORK's Business and Game Software Rental Libraries and evaluate products for a full 14 (Regular) or 28 (VIP) days to see if it meets your needs. And The NETWORK's rental charges are far less than other software rental services—JUST 20% OF THE MEMBER WHOLESALE PRICE.

Hardware prices highlited by ► reflect recent major price reductions

COMPLETE IBM™ PC SYSTEMS

IBM PC STARTER SYSTEM

IBM PC w/64K (256K capacity) **$1,620.50*** *(35.00)*

Floppy Drive Controller
1 Double Sided Double Density 320/360 Disk Drive
Hercules Color Card w/Parallel Port
Zenith ZVM-123 Display Monitor

CALL FOR LATEST IBM PRICING

The NETWORK has the perfect starter system for you! The combination of a double sided drive, color card and printer part allows you to run most any program and grow without need for replacing any component you buy now.

IBM PC BASE SYSTEM

IBM PC w/256K **$1,581.40*** *(34.16)*

Floppy Drive Controller
2 Double Sided Double Density 320/360K Disk Drives

The Base System is your lowest cost starting point for configuring the exact system of your choice. Combine it with any of the monitors, video cards, multifunction cards and accessories listed in this ad, and prove the Network can't be beat as your system source.

IBM PC PROFESSIONAL HARD DISK SYSTEM (XT)

$2,146.40* *(46.36)*

IBM PC w/256K

Floppy Drive Controller
1 Double Sided Double Density 320/360K Disk Drive
w/MMI new technology 3" 10MB Hard Disk.
Uses less power than a floppy.
Shock mounted ½ height installation leaves room for tape drive in pc.
Automatic Hard Disk Boot Feature.

CUSTOM CONFIGURATIONS WELCOME

This system increases productivity in any business or professional situation. The 10Mb hard disk eliminates cumbersome floppy disk changes, simplifies operations and dramatically speeds program execution time. The NETWORK's buying power provides you with better than XT performance at a price lower than you'd expect to pay for a standard PC.

***PC Network Members pay just 8% above this wholesale price plus shipping. These prices have been prepared in November, 1984 and may have been changed with new product announcements. Call for latest prices.**

LATEST ISSUE REDUCTIONS!

64K MEMORY EXPANSION KITS .. $ 28.80*
Set of 9 chips. *Guaranteed for Life.*

LOTUS 1-2-3 ..... $270.00*
New Best Price!

MMI 10MB INTERNAL HARD DISK 665.00*
Low Power Automatic Boot

PANASONIC/SHUGART ..... per pair 225.00*
½ Height DSDD Disk Drives with Mounting Kit

STAR MICRONICS GEMINI 10X 225.00*
120 CPS Epson IBM Graphics Compatible w/Tractor

TANDON TM100-2 DRIVES 143.00*

ORCHID BLOSSOM/64K installed 205.00*
New Price! Full Six-Pack Features with networking capability!

AMDEK MONITORS
V300G Composite Green 110.00*
V300A Composite Amber 120.00*
V310A IBM Amber 130.00*

HERCULES MONOCHROME CARD 298.00*

HAYES 1200B with new Smartcom II 366.90*

NEC SPINWRITER 2050 ..... 625.00*
20 CPS-Letter Quality Printer

BRAND NAME DISKETTES 16.00*
DS/DD Box of 10 *Guaranteed for Life Not Generic*

**NETWORK members pay just 8% above these wholesale prices plus shipping*

CALL TOLL FREE 1-800-621-S-A-V-E (orders and memberships only)
In Illinois call (312) 280-0002 validation code B315

PC NETWORK

. . . WITH THESE 15 UNIQUE BENEFITS

1 COST + 8% PRICING — The NETWORK purchases millions of dollars in merchandise each month. You benefit in receiving the lowest price available **and all at just 8% above published dealer wholesale price.**

2 OUR 500 PAGE WHOLESALE CATALOG — Members receive our 500 page wholesale catalog containing over 20,000 hardware and software products for the IBM PC, APPLE and over 50 other popular computer systems. THE NETWORK'S CATALOG IS THE LARGEST SINGLE COMPILATION OF PERSONAL COMPUTER PRODUCTS AVAILABLE TODAY.

3 IN-STOCK INSURED FAST HOME DELIVERY — The NETWORK maintains a **giant multi-million dollar inventory of most popular products,** allowing us to ship many orders from stock. Non-stock items are typically maintained in local warehouses just days away from The NETWORK and YOU. We pay all insurance expenses on your shipment. ***EMERGENCY OVERNIGHT SERVICE IS AVAILABLE ON REQUEST.***

4 10 DAY RETURN POLICY — If you are not satisfied, for any reason with any hardware component purchased from The NETWORK within 10 days of receipt, we will refund your entire purchase (less shipping) with no questions asked.

5 MEMBERSHIP SATISFACTION GUARANTEE — If for any reason you are not satisfied with your membership within 30 days, we will refund your dues IN FULL.

6 EXPERIENCED CONSULTANTS — The NETWORK hires consultants, not order takers, to aid you in product selection. Our consulting staff possesses in excess of 150 man years of personal computer product experience. **We back our consultants with our money back guarantee: IF ANY PRODUCT RECOMMENDED BY OUR CONSULTING STAFF FAILS TO PERFORM AS PROMISED — OR IS INCOMPATIBLE WITH YOUR SYSTEM — WE WILL TAKE IT BACK AT OUR EXPENSE FOR A 100% REFUND.**

7 FREE TECHNICAL SUPPORT — The NETWORK supports every product it sells. Our qualified TECH-SUPPORT staff will help you assemble your system, interpret vendor documentation and get your software and hardware to work. **WE WILL GIVE YOU ALL THE HELP YOU NEED, WHEN YOU NEED IT — FREE!**

†**8 OPTIONAL BUSINESS RENTAL LIBRARY** — All members can join our BUSINESS RENTAL LIBRARY ***featuring over 1000 available titles*** for just $25 PER YEAR above the base membership fee. **This entitles you to rent business software AT JUST 20% of the DISCOUNTED PRICE FOR A 14 DAY PERIOD. If you decide to keep the software, the entire rental fee is deducted from the purchase price. VIP MEMBERS GET A FULL 28 DAYS for just $30 above the V.I.P. base fee. This also includes the game library privileges for a $5 combination savings.**

†**9 OPTIONAL GAME SOFTWARE RENTAL LIBRARY** — The Game Rental library is available to members for just $10 PER YEAR and permits evaluation (or just enjoyment) of any game or educational software product as above.

10 SPECIAL SAVINGS BULLETINS — THE PRINTOUT — The NETWORK seeks every opportunity to save money for its members. We buy excess dealer inventories, and store bankruptcy closeouts regularly. We then turn around and make this merchandise (only top quality name brand products) available to our members at fantastic savings via THE PRINTOUT, our newsletter and savings bulletins.

11 DISCOUNT BOOK LIBRARY — Working with numerous publishers and distributors, The NETWORK has assembled a library of over 1000 computer related books and manuals at savings of up to 75% from the normal store price.

12 MEMBERSHIP REFERRAL BONUS — Our most valuable source of new members is you! To date almost 40% of our members have been referred by word of mouth from other satisfied members. For those of you who refer new members, THE NETWORK will credit a cash bonus to your account applicable to any future purchase.

13 CORPORATE ACCOUNT PROGRAM —Almost 50% of The NETWORK'S members are corporate buyers and users *(see opposite page left).* The NETWORK can establish open account status and assign designated account managers to expedite orders, and coordinate multiple location shipments.

14 QUANTITY DISCOUNTS — For large corporations, clubs and repeat or quantity buyers The NETWORK can extend additional single order discounts, when available to us from our manufacturers and distributors.

15 PRICE PROTECTION — The PC Industry is crazy!! Prices change not yearly or monthly or even weekly but often day by day! These changes are sometimes up *but are mostly down!!!* **THE NETWORK GUARANTEES THAT IN THE EVENT OF A PRODUCT PRICE REDUCTION, BETWEEN THE TIME YOU PLACE YOUR ORDER AND THE TIME THE PRODUCT SHIPS YOU WILL ONLY PAY THE LOWER AMOUNT!!**

Inquiry 272

GUESS WHAT ELSE YOU CAN DO WITH COMPUTER GRAPHICS!



Many micro users have not yet discovered how much more they can accomplish with computer graphics than without it. And many who already use computer graphics aren't aware of how much more they can accomplish with it.

For all these people, the National Computer Graphics Association is pleased to present what's new—at Computer Graphics '85.

Computer Graphics '85 will help those who have systems get more out of them. Users will not only learn how to do better what they're already doing, but also how to do more kinds of things with the systems they already have.

Those who have not yet begun to explore the world of computer graphics will find guidance in selecting and using the hardware and software to meet their needs, now as well as in the future.

COMPUTER GRAPHICS '85

From April 14-18, 1985, Computer Graphics '85 will fill the Dallas Convention Center with a 7-acre exposition featuring more than 200 leading vendors of computer graphics hardware, software, systems and services. At the same time, more than 200 computer graphics experts will lead more than 70 tutorials and technical sessions for professionals who use, or should use, computer graphics technology in animation, architecture, biomedicine, business graphics, CAD/CAM, mapping and cartography, defense automation, graphic arts, higher education, printing and publishing, scientific research, statistics, and videotechnology.

WHATEVER YOU DO

. . . see Computer Graphics '85. It will help you get more done, better, with computer graphics technology.

Inquiry 251

I WANT TO KNOW MORE

☐ Please rush me registration information on the Computer Graphics '85 Conference and Exposition.

☐ I cannot attend, but would like to receive information about the National Computer Graphics Assocaition.

Call or write today:
NCGA
Dept. HC
Suite 601
8401 Arlington Blvd.
Fairfax, VA 22031

(703) 698-9600

Name

Company

Address

City State Zip

APRIL 14-18, 1985

DALLAS CONVENTION CENTER

DALLAS, TEXAS

CONDUCTED BY GREGG WILLIAMS AND ROB MOORE

THE APPLE STORY

PART 2: MORE HISTORY AND THE APPLE III

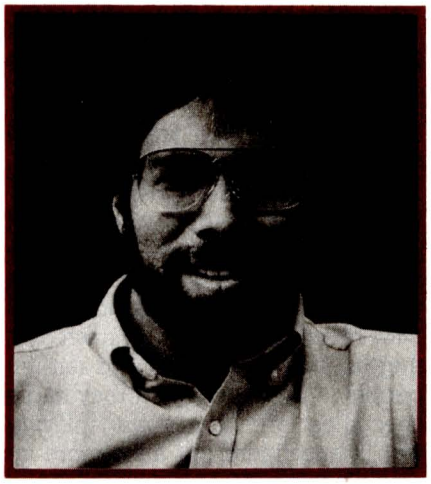

An interview with Steve Wozniak

Last month, Steve talked about his background, the evolution of the Apple I and II, and the early days of the company. In this part, the conversation switches to various aspects of the Apple II design, later personal history, and Steve's thoughts about the personal computing industry.

SWEET-16

BYTE: *One of the more interesting things in the Apple II ROM was your 16-bit pseudo-machine called "Sweet-16." How did you come up with that?*

WOZNIAK: While I was writing my BASIC, I had been thinking about ways to save code. There were several places where I had to handle 16-bit pointers with an 8-bit processor, and that was pretty awkward.

So I decided to write a little emulator and implement a 16-bit machine that could interpret pseudo-codes and implement registers 0 to 15 in the 6502 base page. It ran about 30 times as slow as 6502 assembly language, but it saved tons of code every time I used it in a program.

BYTE: *Did you actually use it in your Integer* BASIC?

WOZNIAK: No, I never had the time to reimplement the BASIC to use it. But I did use it in later years to write things like BASIC renumbering routines totally in Sweet-16. It was easy to mix Sweet-16 code with assembly language.

BYTE: *Isn't Sweet-16 still used in Apple* DOS *and ProDOS editor/assemblers?*

WOZNIAK: Yes, it's used in EDASM [the Apple Tool Kit 6502 editor/assembler], mostly in the editor portion. Randy Wigginton wrote EDASM. He's worked here since before we even had a company. Lately he's written the Macintosh word processor—MacWrite. He's done a lot for the company, and he's used Sweet-16 in several things he's done.

THE DISK DRIVE

BYTE: *Can you tell us a little about how you came up with the Apple II disk drive and how you ended up picking your form of group-coded recording?*

WOZNIAK: The disk design was my most incredible experience at Apple and the finest job I did. I never really knew what a disk controller was or what it had to do. But at Hewlett-Packard I had looked through a Shugart manual to see what signals were used and what they did. There were signals to make the head step in and out and signals to cause magnetic flux changes. It was similar to audio recording, and I knew about that. It was like a signal on a tape where you write it and then you read it back. So I figured out a simple little circuit to write signals at changing rates and read them back. I didn't know how disk controllers worked, so I assumed that I was doing something totally different. Maybe it wasn't as efficient, but at least I could write some data and read it back.

Well, Mike Markkula was annoyed because the cassette tape was too slow. He had a favorite checkbook program, and it took two minutes to read in the program and another two

(continued)

Gregg Williams is a senior technical editor at BYTE. *Rob Moore is a hardware designer and frequent contributor to* BYTE. *They can be contacted at* POB 372, *Hancock*, NH 03449.

PHOTOGRAPH COURTESY OF APPLE COMPUTER INC.

'Hobbyists are a tiny part of our market, but they're faithful to the company.'

minutes to read in his check files. He was complaining about this at a staff meeting, and I mentioned that I had this clever little five-chip circuit that could read and write a floppy disk. At the time, all the existing floppy-disk controllers were 40 or 50 chips, so I knew there must be something important that I wasn't doing.

I went off and tried to figure out what it was that I wasn't doing. One of our technicians had a North Star system, so I looked through their manuals. I read their schematics and figured out what every chip did. And I looked through their listings until I understood exactly what they were doing.

I was doing a lot more. I didn't even have to look at the sector holes, so I could use any disk drive, any floppy disk in the world. It was then that I new I had a really clever design.

The next week was Christmas vacation. Randy Wigginton and I spent the entire week, including the holidays, trying to get this disk reading and writing with a very simple operating system. We did the bottom levels of an operating system in that week. You could type R (for "read") followed by a program name like STARTREK, and it would load STARTREK into memory.

We were highly motivated because, at the end of the week, a show called the CES [Consumer Electronics Show] was starting in Las Vegas, and we wanted to go.

We worked all night the day before we had to show it [the disk drive] at CES. At about six in the morning it was ready to demonstrate. Randy thought we ought to back it up, so we copied the disk, track by track. When we were all done, he looked down at them in his hands and said, "Oh, no! I wrote on the wrong one!" We managed to recover it and actually demonstrated it at CES.

BYTE: *Had you been exposed to group-code recording before, or did you invent yours independently?*

WOZNIAK: The first version of the floppy-disk routines did not have group coding. I had followed the Shugart manual, which showed that you had alternate clock bits and data bits, so every other bit was wasted. I couldn't understand why it was necessary, but I started that way.

Then I came up with this idea to use coded recording. I knew the technical rule was that you could only have one or two zeros in a row. You could have either 4 or 8 microseconds between flux transitions. I didn't really know what group-coded recording was; I just knew that I could fit 13 sectors on a disk instead of 10. I had to write a program to take bytes off the disk, convert them to 5-bit chunks, and reassemble them into 8-bit data bytes.

It was a difficult routine to write. It was about a 20-hour job, and I'd work through the day for 10 or 12 hours and I wouldn't quite get there. The next day I'd come back and find out that I was starting exactly where I had the day before. This went on for almost a month. I was not quite getting the routines, and we were getting within a month of shipping the disk drives. Finally I stayed up all night until I got all five routines that had to work together done. So we were able to ship it the first time with the group-coded recording in place. Later, we changed the encoding method and stepped up to 16 sectors. That was DOS 3.3.

BYTE: *The Macintosh uses a custom chip called the* IWM—*Integrated Woz Machine—that does the same sort of recording. Can you tell us anything about that?*

WOZNIAK: My design was basically a little sequencer, or state machine. It used a PROM and a latch and cycled through various states depending on the input data coming off the floppy disk. The IWM takes that design and adds other features like the ability to go twice as fast—it can also do IBM format, double-density recordings.

BYTE: *It sounds like a fascinating part. Do you think we'll see Apple II owners benefit from it in any way?*

WOZNIAK: Well, it's our standard disk controller now, and it's cheaper than the older design. It's used in the Apple IIc.

BYTE: *Could you use it to get higher-density recording on an Apple II 5¼-inch disk?*

WOZNIAK: No, because the disk drives themselves aren't certified for double-density recording. You need heads with the proper gap, and they're more expensive.

BYTE: *You're a former hobbyist. Could a hobbyist buy one of these chips and a spec sheet and start playing with it?*

WOZNIAK: I don't think Apple would give out the spec sheet. I totally disagree with that policy because I'm very respectful to the hobbyists. They're a tiny part of our market, but they're loyal supporters and faithful people to the company. If they had a spec sheet, they could start playing with it and figure out a lot more incredible things that we never planned it to be used for—even using it as a communications channel from Apple to Apple, Macintosh to Macintosh. There are a lot of great tricks you could do with that little part. It's a beautiful random I/O device that has too many things that have not been taken anywhere.

Personal Details

BYTE: *In 1981 you were in a plane crash and you left Apple for a while shortly after that. How long did it take you to recover from the accident?*

WOZNIAK: That was in February 1981. For about five weeks I had a type of amnesia that prevents you from forming any new long-term memories. After I recovered, people would show me pictures of myself in the hospital, playing games with my computer with my face all battered up. They would tell me stories of how I tried to sneak out of the hospital to visit my wife, Candy, or how I went to parties and rode my motorcycle. I didn't remem-

(continued)

THE SNOOP-PROOF DISK.

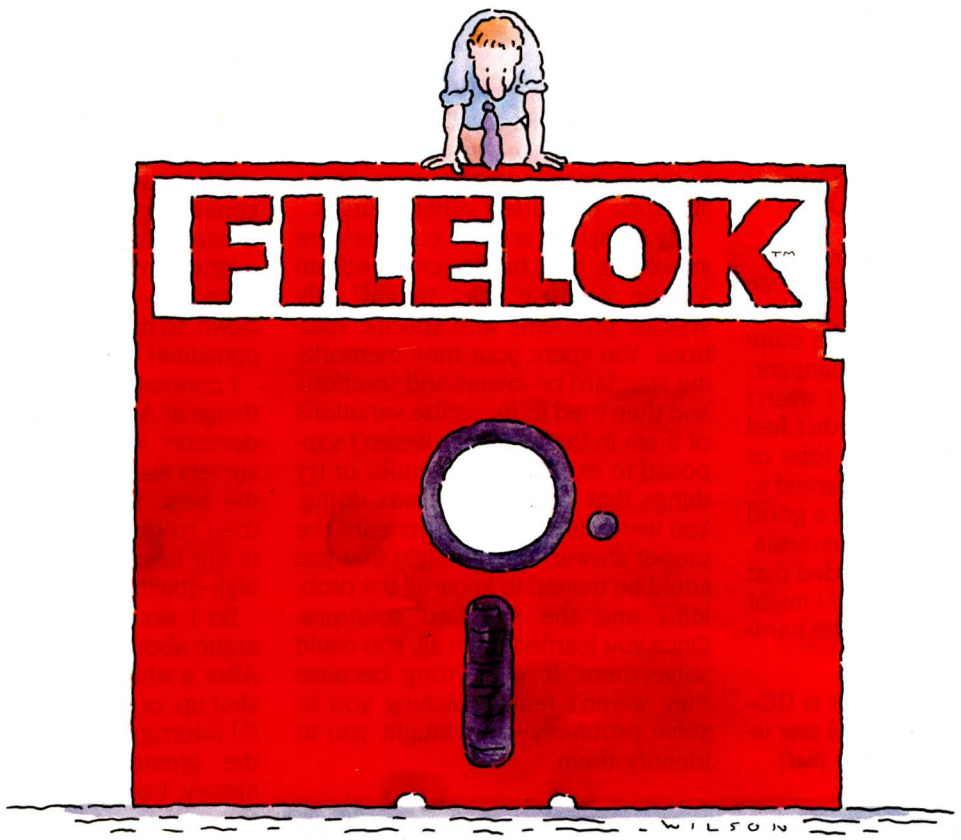

Vault Corporation, producer of the advanced Prolok™ and Telelok™ security disk technology, introduces Filelok,™ the inexpensive, effective means of protecting confidential data files from unauthorized access and duplication. Now you can instantly protect all kinds of sensitive information, including word processing, spread sheets and graphics, as easily as saving a file.

Filelok data security disks provide file-by-file security selection, protected back-up copies, optional passwords, and hard disk compatibility. It works with virtually all PC®/MS-DOS® software, including the popular Lotus® 1-2-3,® dBase II® and III,® and WordStar.® All this comes on a U.S.-made 5¼-inch, double side/double density disk of the highest quality. With reinforced hub and lifetime warranty. Certified 100% error-free. The same kind of high performance disks you require every working day with one important difference—they're protected.

Filelok's genius is its simplicity of use coupled with an extremely high level of protection. It looks like an unprotected disk and works like an unprotected disk. Simply tell the computer which file(s) to protect and on which disk drive they're located. Instructions can be as simple as B:FL A:(applications software).

Filelok eliminates the need for expensive add-on hardware. All the technology is on the disk itself. Filelok disks are marked with unique physical "fingerprints." And no two are alike. A precise description of the print is encoded on each disk. Prints and descriptions are compared whenever a protected file is accessed and an *exact* match must occur before any decrypted data is released. Protected back-ups are easily made. However, to read them the original Filelok disk must be present in the system. Unauthorized copies having a different or non-existent fingerprint yield only encrypted—and useless—data.

For the Filelok dealer nearest you, call 1-800-445-0193.
In California, call 1-800-821-8638.
We're adding dealers as quickly as possible but if you can't find one nearby, simply call either of the numbers above. Or write Vault Corporation, 2649 Townsgate Road, Suite 500, Westlake Village, CA 91361. And do it now. Because some people are more nosy than you think.



VAULT
CORPORATION

FILELOK.
DATA SECURITY, RIGHT ON THE DISK.

Copyright ©1984 Vault Corporation. Filelok, Prolok and Telelok are trademarks of Vault Corporation. PC-DOS is a trademark of International Business Machines Corporation. MS-DOS is a trademark of Microsoft Corporation. Lotus and 1-2-3 are trademarks of Lotus Development Corporation. dBase II and III are trademarks of Ashton-Tate. WordStar is a trademark of MicroPro International Corporation. Dealer inquiries welcomed.

ber any of that. I had all of my old memories, but I'd forget new things from one day to the next. Finally I came out of it one night, but I never got those memories back.

BYTE: *Why did you leave Apple?*

WOZNIAK: We had a hundred engineers at that point, and I was no longer really important to the company. I didn't want to be a manager; I was just an engineer, and I wasn't really needed there. But I didn't feel comfortable going to Steve Jobs or Mike Markkula and saying I wanted to take off. The plane crash was a good excuse. After five weeks of amnesia, I simply didn't go back. I decided that if I was going to take a year off I might as well finish college. It was the hardest year of my life.

BYTE: *We've heard that you went to UC–Berkeley and had some run-ins with your instructors. Could you tell us about that?*

WOZNIAK: I was going under an assumed name—Rocky Clark—so they didn't know who I was. I took computer science courses, economics, statistics, and a few other courses.

My computer science courses were interesting, but I have to criticize them a little because they taught only specific problems with specific solutions. You spent your time memorizing standard problems and solutions and then tried to recognize variations of them in the tests. You weren't supposed to explore new avenues or try things that nobody else was doing. You were only supposed to learn the proper answer. They thought that you could be trained to know all the problems and the standard solutions. Once you learned them all, you could solve them. It was wrong because they weren't really teaching you to solve problems—they taught you to identify them.

My economics course was interesting also. We had a socialist TA [teaching assistant] who taught us that companies made money by cheating the consumer. All the kids in the class thought that companies would make a lot of profit if they could figure out a way to cut the costs of a product down, to make it cheap and screw the consumer.

I contrast that with the way we did things at Apple. Every product design decision was based on what consumers wanted, what would compete the best, what they would buy. We tried to do what customers wanted, in our best judgment, and give them high-quality products.

So I would stand up in class and argue about what the TA was saying. After a while he started telling me to shut up, or that he would kick me out if I interrupted him again. Apple was the greatest business success in history, but I couldn't tell him who I was.

BYTE: *So you came back to Apple after about a year. What would you say is the most important thing that you've worked on since you came back?*

WOZNIAK: There isn't too much. When I came back I started getting a little bit involved with this division's management, but it was unofficial. Officially I took the title of Engineer. Mostly, I've stayed involved with the Apple II because that's where I've got the most to offer.

Because I'm a founder at Apple, I could take almost any role I want, but I've tried to avoid the newest, most far-reaching projects because there are other capable people to do them. I try to stick to small projects where I can sit down and handle them myself.

CURRENT WORK

BYTE: *Do you have anything interesting going on now?*

WOZNIAK: There are not many individual projects in this whole business. The floppy disk may have been the last one for Apple. I have got a few projects that I'm working on now, but they're not all going at once.

If you think all port expanders are equal...
HERE'S THE SWITCH!

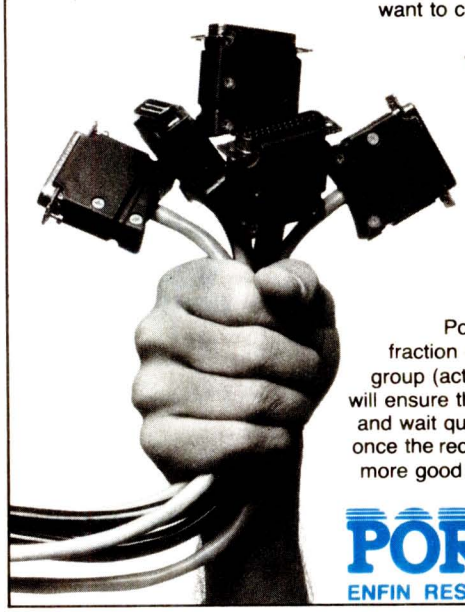

No more scraps to see who gets to use the printer first. No more tangles with cables everytime you want to connect to peripherals. No more jostling heavy equipment around the office.

WOULDN'T YOU RATHER SWITCH THAN FIGHT?

Portal allows you to quickly and easily introduce a comprehensive switching system that will handle terminals, printers, modems, CPUs and other RS232 compatible devices. Up to 32 ports can handle 16 simultaneous connections.

SAVING TIME AND MONEY— NOW THAT'S A SWITCH

Portal gives you network capabilities at a fraction of the cost. With features such as hunt group (acts much like a multi-line telephone that will ensure the user gets through to an open mode) and wait queues that will automatically notify user once the requested peripheral is available. There's more good news and features. Call or write today for complete details.

PORTAL
ENFIN RESOURCES INC.

150 Metcalfe St.
Suite 102B, Ottawa
Ontario K2P 1P1
613-230-1759

Inquiry 126

The language Fifth is one of them, but I haven't written it yet. I'd like to combine the best features of BASIC, FORTH, and Pascal, and leave out the worst ones. You could have the formal structures of Pascal, the immediateness of BASIC, and the extensibility of FORTH. In FORTH or Logo, new words become part of the language, and you can use them immediately. It's really helpful for debugging. In Macintosh Pascal, you can define a procedure and run it immediately. I also want some level of globalness, like BASIC. I don't want to always have to declare a variable before I can use it. I like variables with scope, but I'd like undeclared variables to be totally global.

Another project is an operating system, like the one on the Macintosh, only a bit different and a lot more relational.

I also have a hardware project that I'd like to do, a personal computer based around consumer video sources like TVs, videotapes, and videodiscs. It would switch them around, synchronize them, and mix them, sort of like a little home editing studio. I think it's possible because memories are getting so cheap. You could hold a frame from each of your video sources in memory and let the software accommodate the sync variations. There are a lot of new chips available that do NTSC modulation and demodulation, so there ought to be a minimal chip solution.

My main interest is still the Apple II—the home computer we started with. I'd like to see Apple do more with speech. There are some really inexpensive speech chips now, and that's the way the rest of the personal computer world is heading. I think we've been deficient in that area.

SPECULATIONS

BYTE: *Are you thinking about using the new 65816 processor for anything?*

WOZNIAK: We're thinking about it and doing some R&D with it, but I don't know if we'll use it. Anything we do has to be compatible with the Apple II. If we found out that the 65816

(continued)

TOUGH LOCAL NETWORK PROBLEM:

"How can our department get our six computers and three printers to work together efficiently? We also want to be able to access outside data services and our future company LAN."

SIMPLE NETWORK SOLUTION: NetCommander

NetCommander is a smart, small Local Area Network manager. It lets you link from four to 40 computers and peripherals — in any mix of models and makes. A 50K buffer (expandable to 250K) makes sure that productivity is high — keeping fewer printers humming — while computer and PC users do their thing, without waiting for a printer, modem, or shared disk. Those devices can be specified with names defined by users — and allocated on the basis of availability and capability. And NetCommander handles multiple protocols and different baud rates simultaneously — without modifications to hardware or software. It will also tie into your company's LAN. The latest in a family of products in use since 1979, NetCommander is a smart, small, efficient network manager.

For more information, call or write:

NetCommander

Digital Products Inc. • The Simple Network Solution Company
600 Pleasant Street • Watertown, MA • 02172
(617) 924-1680 • Outside Mass., call 1-800-243-2333
And check out our 30-day trial evaluation.

Free Catalog!

Your 80-page guide to computer supplies and accessories–including complete new product descriptions.



- Packed with over 1600 products for microcomputers, minicomputers, and word processors – many available nowhere else.
- Big special section devoted to new supplies and accessories.
- Comprehensive product descriptions – including more than 475 full-color photos – clearly explain features and benefits.
- Easy-to-use cross reference guides to magnetic media, ribbons, and more–along with the industry's most complete cable guide.
- Helpful suggestions and tips, ranging from flexible disk care to proper ribbon selection to useful application ideas.

Phone toll-free 1-800-547-5444
In California, call 1-800-547-5447.

inmac™

Phone toll-free 1-800-547-5444* or send coupon today.

Inmac Catalog Dept.
2465 Augustine Drive
Santa Clara, CA 95054

Please rush my free copy of the Inmac Catalog. I understand there is no obligation whatsoever.

NAME
COMPANY
ADDRESS
CITY
STATE ZIP PHONE

*In California, call 1-800-547-5447.

107146

THE SPREADSHEET

In late 1982, A.P.P.L.E., a national Apple users group, offered an astounding value to its members. For $22.50, A.P.P.L.E. members could purchase a fully functional VisiCalc-like spreadsheet program called "THE Spreadsheet." At the time, various versions of VisiCalc and other popular spreadsheet programs were selling for between $200 and $300. THE Spreadsheet offered most of the features found in VisiCalc and added a few of its own. What's more, it was coauthored by the now legendary Steve Wozniak. Mysteriously, THE Spreadsheet was available for only one month, after which it was permanently discontinued. Since that time, original copies of THE Spreadsheet have become one of the few legitimate microcomputer collector's items. In the following segment, Steve describes how THE Spreadsheet came about.

WOZNIAK: It started because Mike Scott was having difficulty negotiating with Personal Software [now VisiCorp] about VisiCalc. They just wouldn't do what he felt was right as far as giving Apple breaks on price or doing new enhancements to it. So he came by one day and he said to me, "Would you like to do a VisiCalc?" It wasn't even known as a spreadsheet then.

I was really scared. VisiCalc was the only spreadsheet for a long while, and none of us had really been in business before. Was it legitimate to go out and do your own spreadsheet? Or was it equivalent to just copying and ripping somebody off? I didn't want to get close to this whole thing because I didn't want it to look like I was copying somebody else.

Mike got Randy Wigginton and Randy said, "Sure, I'll do it." I said I'd do the arithmetic routines because they were general—something that could be used by any program—and I had some good algorithms that I had picked up at Hewlett-Packard that I wanted to implement.

So we started working on it and, a little ways in, Randy finished it. He wrote 4K of code in a couple of weeks, and I was shocked that he came in so quick; I hadn't even started mine. So, I was getting to work on my arithmetic routines and my first demo was almost ready but still a few days off.

At the time, everyone was trying to get the Apple III into production. Mike Scott was camped out in the Apple III building, forcing the things that had to get done to get it finished and delivered on schedule.

He was in a bad mood. Everywhere anyone ran into him in the company, he had a sour face—no laughs, no jokes. And because Randy finished his first part of the spreadsheet and I hadn't finished my first part, he'd always come to me. The way he was talking to me, I was afraid I was going to get fired. He was in a *bad* mood.

It was the scariest time of my life at Apple. I was really getting badly addressed just for not being on time with something. I had three more days to go, and I didn't dare run into him once more because I was already way overdue. So I said, "I've got to get him in a good mood for three days."

Well, he's a Star Wars fan. He gets the T-shirts the cast gets before they get them because he knows who prints them. So I had a friend of mine call his secretary saying, "This is George Lucas. Is Mike Scott in?" Of course he wouldn't leave a phone number, but he said, "I'll call back." It actually worked. Mike was in a good mood for a few days, and I got my routines done.

Anyway, we finished the spreadsheet, and Apple started looking it over. Originally it had been defined to be as accurate as VisiCalc, and we were so much faster than VisiCalc it was ridiculous. The exponential routines that I really wanted to write for so long, because I had a good algorithm, were 30 times faster than VisiCalc's.

All of a sudden we started hiring experts on precision and things like that, and they started redefining the project from what Mike Scott had originally defined. They added a lot of features that Randy had to implement. This made life very difficult here at Apple, so we finally decided, "No, it won't be a Special Delivery Software product [a line of software offered by Apple a few years ago]."

After a long, long time, Randy went to *Call-A.P.P.L.E.* [the magazine put out by A.P.P.L.E.]. One night we were out to dinner and he said to Steve, "Well, I'm going to sell that to *Call-A.P.P.L.E.*" or "I'm going to give this spreadsheet to *Call-A.P.P.L.E.*" Steve said, "Well, that's good" or something like that. It was not official or formal. Randy went ahead and hit on it and gave it to *Call-A.P.P.L.E.* It was sold for $22.50—really cheap. We didn't want any money out of it. It was just the old Homebrew Computer club spirit of "Give to help others."

It was a good product, and it had been delayed well over a year. If Apple didn't want it, they should have just gotten rid of it, and it would have been out a year sooner. As soon as it popped up from *Call-A.P.P.L.E.* and was advertised, Apple got in a real huff about it. They forced *Call-A.P.P.L.E.* to only sell it to members, and only one copy per member. So Apple basically put it out of business—only allowed it to be sold for one more month.

It's really funny, because how did Apple get started? I designed the Apple while I was at Hewlett-Packard. Hewlett-Packard has a policy of deciding about these things very quickly. They would check with their legal department and other divisions and decide very quickly. So they gave me a formal release on it quickly because they didn't want it. But here was Apple, which didn't want it but wasn't going to release it.

If you use much Apple II software, you'll be surprised when you take the spreadsheet that Randy and I wrote and boot it in. It boots in so fast, you can't believe what's going on.

BYTE: *Is that because there's no copy-protection on it?*

WOZNIAK: No. Believe it or not, I used those routines that I did for Apple II Pascal.

BYTE: *You, Randy Wigginton, and Guil Banks were listed as the authors. Who is Guil Banks?*

WOZNIAK: Guil is right here in this building. I did the boot stuff, and he had written a lot of the other fast disk routines in there. He did all the routines that managed the disk and read and wrote DOS files appropriately without using DOS.

This was basically an all-volunteer project that we did all on our own time. And it was really neat, so we decided that we'd give it to the rest of the world.

wasn't, it would be a serious question. It's too new a part right now.

BYTE: *How is its performance compared to the* 68000?

WOZNIAK: It should be available soon in an 8-MHz version that will beat the pants off a 68000 in most applications, and in graphics applications it comes pretty close. Some of the Macintosh people might disagree with me, but there are ways around most of the problems they see. An 8-MHz 65816 is about equivalent to a 16-MHz 68000 in speed, and a 16-MHz 68000 doesn't exist.

BYTE: *The Apple II family has been a great success, and many innovations have come along to extend its life. What things do you think were responsible for its success?*

WOZNIAK: For three years we were one of the biggest business successes in history. We had three years of fantastic business success, and lately we've had three years of sort of dismal business. We've grown, but any additional revenues have just replaced the stock dilution, and the price remains about the same.

During that three years there were two main factors that led to our success—our floppy disk and VisiCalc. Out of the original home computers, which included the TRS-80 and the Commodore PET, ours was the only one that had enough memory to run VisiCalc. VisiCalc and the floppy disk sent this company into the number-one position.

We were also very faithful to our users—we tried to support everybody. When we changed over to floppy disks, we still supported cassettes heavily. When we moved up to the Apple II+ with floating-point BASIC built in, we still supported the original Apple II.

Lately our strategies seem to be changing. When we come up with a new enhancement, we start moving away from the prior version much more quickly. This could be harmful to our good relationships with a lot of our faithful users.

The Apple IIe is a good example. Most new software that really uses the features of the Apple IIe won't run properly on an Apple II or II+. A lot of good software for the Apple II+ won't run on the Apple IIe. It's an incompatible world.

BYTE: *How do you think the Apple II family will be extended and improved in the future?*

WOZNIAK: There are obvious areas. We're always trying to come up with better combinations of features and still reduce the cost. We're looking into improved processors like the 65816 we discussed before. Video resolution is always improving. We're trying to increase speed and the amount of memory in the machine because it's critical to certain applications.

The IBM PC is very successful, and it had no competition from Apple for the last three years because we made sure that it didn't. We would not allow the Apple II to compete in that market for three years.

PCSD is the most difficult division in the company. [Steve is referring to the Personal Computer Systems Division, responsible for the Apple II and Apple III products.] We're hamstrung by the need to be compatible; Macintosh isn't.

So we will continue to make improvements and produce new machines, but they'll always be compatible. With the Apple IIe we went to 128K, 80-column display, and double-resolution graphics. We came out with the IIc portable.

Apple versus IBM

BYTE: *What did you mean when you said that the Apple II was not allowed to compete in the* IBM *market?*

WOZNIAK: Apple has never really supported the Apple II in the business market. If you walk around a trade show and look at the software running on the IBM PC, you'll see that most of it is a step above what's possible on today's Apple II. They have more RAM that's easily addressed and better access to hard-disk drives. Programs like 1-2-3 cannot be easily implemented on a 128K Apple II, but IBM has a capable machine for that level of software. Our machine has to be able to address more memory and

(continued)

DeSmet C

8086/8088 Development Package **$109**

FULL DEVELOPMENT PACKAGE
- Full **K&R** C Compiler
- Assembler, Linker & Librarian
- Full-Screen Editor
- Execution Profiler
- Complete **STDIO** Library (>120 Func)

Automatic DOS 1.X/2.X SUPPORT

BOTH 8087 AND S/W FLOATING POINT

OVERLAYS

OUTSTANDING PERFORMANCE
- First and Second in AUG '83 BYTE benchmarks

SYMBOLIC DEBUGGER **$50**
- Examine & change variables by name using C expressions
- Flip between debug and display screen
- Display C source during execution
- Set multiple breakpoints by function or line number

DOS LINK SUPPORT **$35**
- Uses DOS .OBJ Format
- LINKs with DOS ASM
- Uses Lattice® naming conventions

Check: ☐ Dev. Pkg (109)
☐ Debugger (50)
☐ DOS Link Supt. (35)

SHIP TO: _____

_____

_____ ZIP_____

CWARE CORPORATION

P.O. BOX C
Sunnyvale, CA 94087
(408) 720-9696

All orders shipped UPS surface on IBM format disks. Shipping included in price. California residents add sales tax. Canada shipping add $5, elsewhere add $15. Checks must be on US Bank and in US Dollars. Call 9 a.m. – 1 p.m. to CHARGE by VISA/MC/AMEX.

'I have positive and negative feelings about things Apple has done.'

handle larger disk drives before we can really start to compete with equivalent software because IBM beats us in capability today. We need better screen resolution, more memory, and better speed. A 16-bit processor would help, although "16-bit" really doesn't mean that much.

Whatever we do will be compatible, because we don't want to alienate our existing customer base. If we can come up with the right machine, then we can start to talk about some really good software and compete well with IBM. Even if we do, the new features won't really be used right away.

BYTE: *Have you said all that you meant to say about where Apple is vis-à-vis* IBM *and where you personally feel that Apple has made its mistakes?*

WOZNIAK: I have both positive and negative feelings about things Apple has done, but I'm always honest. There is one real mistake that Apple made, in my opinion, and this is very subjective. It is symbolic of what could happen to IBM with its PCjr.

We had become a huge business success in 1979. We had really made it with our floppy disks and VisiCalc, and it looked like we were going a long way. So we decided it was time to start putting together a real company, a big company. We needed to start staffing up and hire a lot more engineers. So we set the Apple III project in motion.

The executive staff felt it understood the Apple II market. After VisiCalc, it was perceived that 90 percent of all Apple IIs sold were going to small businesses. Only 10 percent were going into this home hobby market that we originally thought was going to grow to be billions. Originally we were a home hobby computer. Now, suddenly, small businesses were buying Apple IIs, and they wanted more features—an 80-column display, lowercase characters, maybe more graphics modes and colors, and more memory. These were all the things that one product, VisiCalc, led to.

According to any research we could dig up, many people were buying the Apple II for small business because it had a disk drive and it could run VisiCalc. These weren't the people I was closest to, so I kept my mouth shut because I was only one out of the staff of 15. So we started staffing

(continued)

SLICER—THE SYSTEM THAT GROWS TO FIT YOUR NEEDS

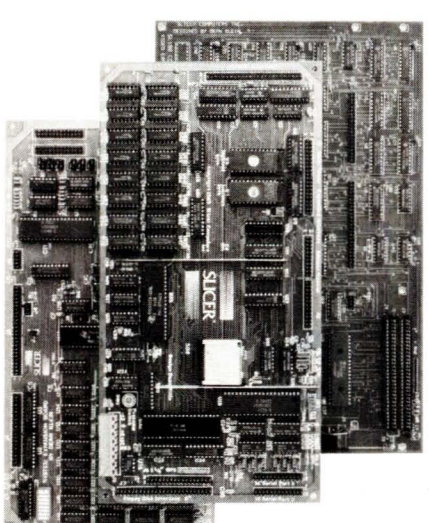

THE SLICER
Real 16 Bit Power on a Single Board—Featuring the Intel 80186

- Complete 8 MHz 16-bit microprocessor on a 6" × 12" board
- 256K RAM, plus up to 64K EPROM
- SASI port for hard disk controller
- Two full function RS232C serial ports with individually programmed transmission rates—50 to 38.4K baud
- Software compatibility with the 8086 and 8088.
- 8K of EPROM contains drivers for peripherals, commands for hardware checkout and software testing
- Software supports most types and sizes of disk drives
- Source for monitor included on disk
- Bios supports Xebec 1410 and Western Digital WD 1002 SHD controller for hard disks

Fully assembled and tested only $995
Also available in several kit forms

THE SLICER SYSTEM EXPANSION BOARD
For expanded memory, additional ports, and real time clock

- Up to 256K additional dynamic RAM
- 2 RS232C asychronous ports with baud rates to 38.4K for serial communication
- 2 additional serial ports for asynchronous RS232C or synchronous communication (Zilog 8530 SCC)
- Real Time Clock with battery backup for continuous timekeeping
- Centronics type parallel printer port

Fully assembled and tested only $800
Available in several kit forms also

THE SLICER PC EXPANSION BOARD
Gives your Slicer high performance video capability

- IBM compatible monochrome video
- Video memory provides 8 pages of text or special graphics capability
- 2 IBM type card slots for color video, I/O expansion, etc.
- IBM type keyboard port

Fully assembled and tested only $600
Available in several kit forms also

Also available: The Slicer 80188 system. 5 1/4" form factor. Call or write for more information.

Operating systems are CP/M 86 by Digital Research, Inc. ($85), and MS DOS by Microsoft Corporation ($175).

MasterCard, Visa, Check, Money Order, or C.O.D. Allow four weeks for delivery. Prices subject to change without notice.

SLICER

Slicer Computers, Inc.
2543 Marshall St. N.E., Minneapolis, MN 55418
612/788-9481 • Telex 501357 SLICER UD

Inquiry 318

ADD-INFINITUM

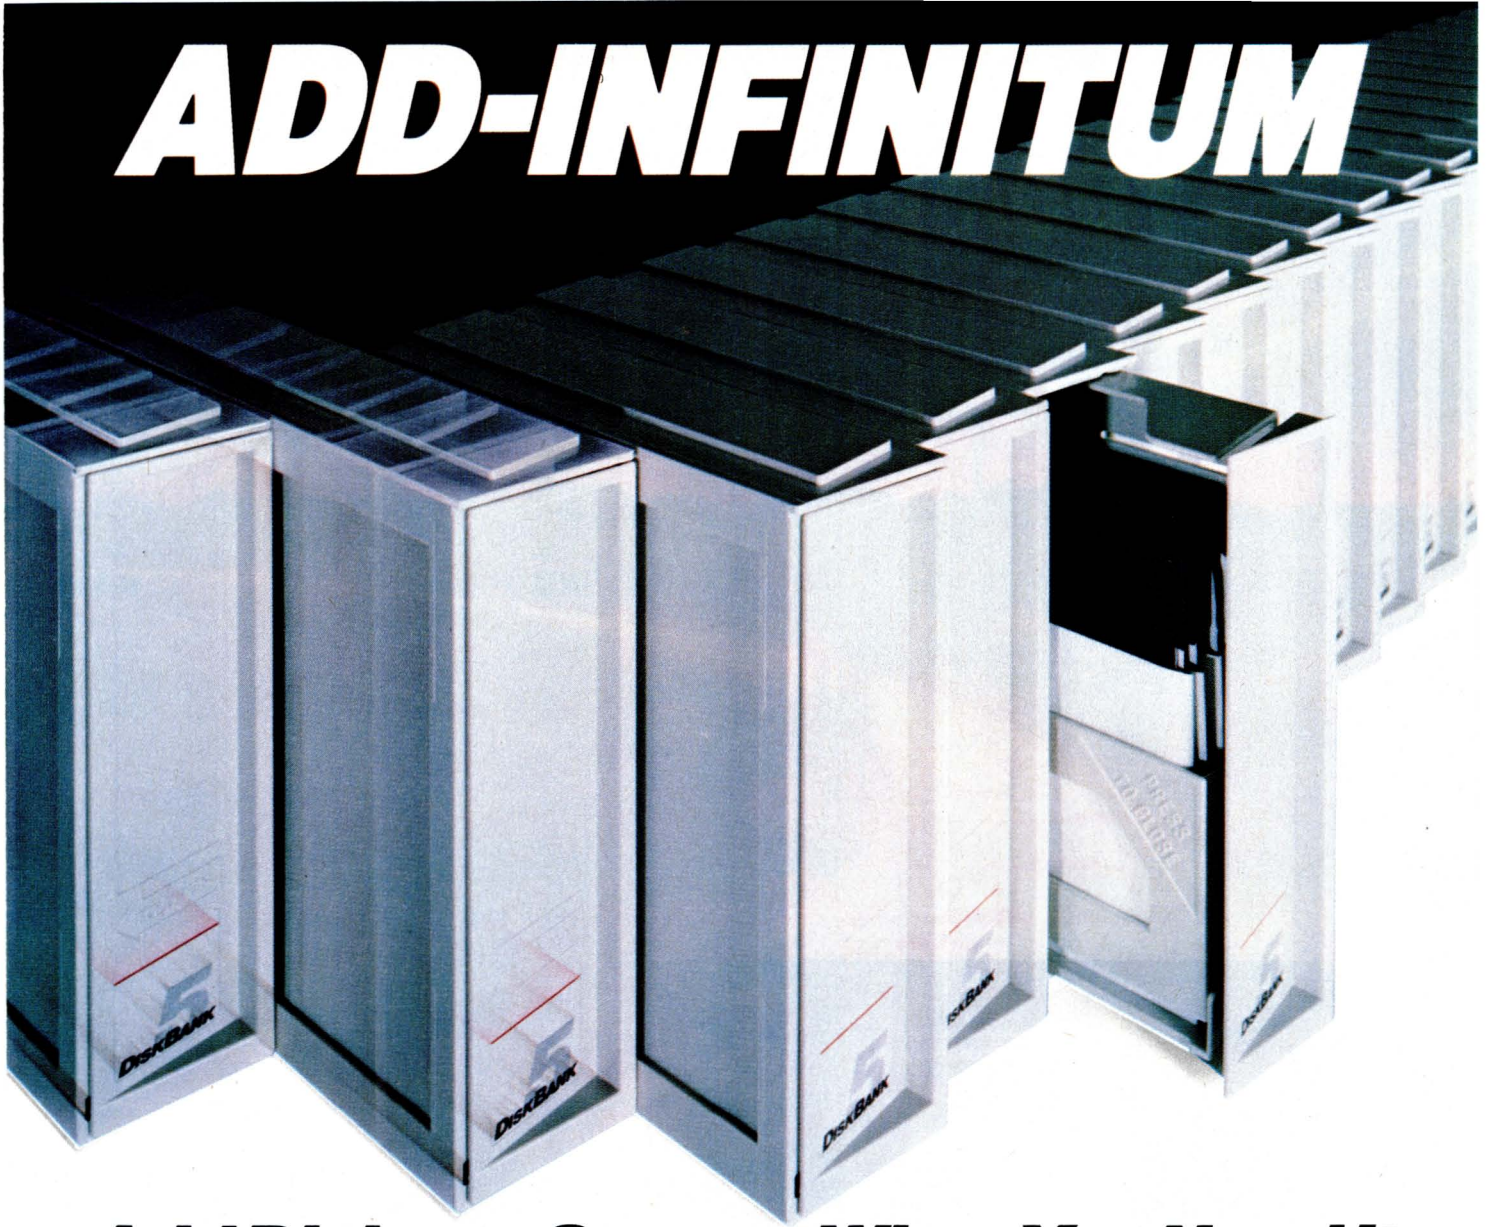

Add Diskette Storage When You Need It With The DiskBank® System.

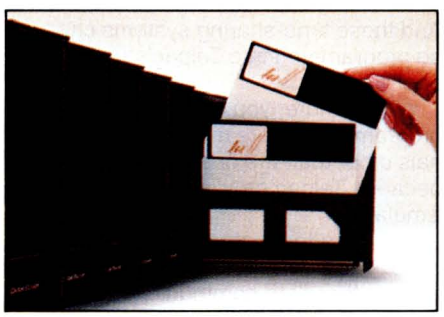

No matter how large or small your diskette filing and storage requirements may be, the DiskBank System by Amaray is the most revolutionary, versatile and cost-effective approach available today.

Its unique modular interlocking design allows you to add new modules as your storage needs expand. Each impact-resistant module conveniently organizes up to 10 diskettes in a safe, dust-free environment. When you need a diskette, simply open the DiskBank drawer and slide it out. Diskettes automatically come forward allowing you to select the one you need.

In addition, the System is portable. DiskBank modules are designed to go with you anywhere. Simply slide out the modules you need, put them in your briefcase, and go.

Available in three media format sizes, System 3 for 3¼"-3½" diskettes, System 5 for 5¼" diskettes, and System 8 for 8" diskettes, DiskBank System may be purchased individually or in money-saving volume packs.



Why settle for less? Give your valuable diskettes the protection they deserve. Buy a Bank. Buy a DiskBank. The DiskBank System.

AMARAY

DISKBANK

Inquiry 16

AMARAY INTERNATIONAL CORPORATION

14935 N.E. 95th Street, Redmond, Washington 98052-2508 Toll Free Number: 800-4-AMARAY

HOW TO MAKE YOUR FILES GO MILES.



Telpac™ is the complete telecommunications software system that allows one computer to communicate with another. Working in conjunction with a modem, your computer now has the ability to upload and download important information.

You can transfer files at speeds of up to 9600 baud at any time of the day or night. And Telpac doesn't even require your presence because it's smart enough to perform unattended. So you can send or receive large amounts of data after business hours by programming your computer to automatically make connections with virtually any other computer during the night—when phone rates are low.

Best of all, the host computer will receive information *exactly* the way it was sent. There's no chance of error because Telpac features XMODEM, XON/XOFF and user-defined protocols for error-free transmission.

Telpac also allows you to log on to information services such as The Source, Dun & Bradstreet, NewsNet and other popular on-line data bases.



And these time-sharing systems can be programmed into Telpac's unlimited phone directory.

What's more, you can run application programs that were meant for terminals other than the one you're using, because Telpac provides Terminal Emulation.*

Compare the features. Compare the price. You'll discover that Telpac has all the other data communications software packages beat—by miles.

TELPAC™

by U.S. Robotics, Inc.

8100 McCormick Blvd.
Skokie, IL 60076
Phone: (312) 733-0497
Telex: 650-186-3130
Outside Illinois: 1-800-Dial-USR

For more information send for a free Telpac brochure.

For a poster size reprint of this ad, send $3.00 to U.S. Robotics, Inc.

TELPAC IS COMPATIBLE WITH THESE SYSTEMS:

Computers:

Apple™ II, II+, IIc, IIe
Columbia™
Compaq™
Corona™
Heath™ H-100
IBM™ PC, PC/XT, PC Jr., PC Portable or AT
Kaypro™ II, 10
Northstar™ Horizon/Advantage
Televideo™ 1605, TPC II
Zenith™ Z-100, Z-151
Most other systems running MS-DOS™, Apple-DOS, or CP/M

Modems:

Anchor™
Apple™
Bizcomp™
Bytcom™
CTS™
Datec™ (Pal Modems)
Hayes™
Incomm™
Inmac™
Multi-Tech™
Novation™ ("Smart Cat Plus" Series Only)
Prentice™ (Pop-Com)
Prometheus™
Quadram™
Qubie™
Racal-Vadic™ (Maxwell Modems)
Rixon™ (R212A, PC212A)
Transcend™ (PC Modem Card)
U.S. Robotics™
Ven-Tel™
This list concerns only modems AUTO-DIAL.

Telpac™ is a registered trademark of U.S. Robotics, Inc.

VT is a registered trademark of Digital Equipment Corp.

*Emulates VT™ 52/100; Televideo® 910; TTY (ASCII)

Inquiry 354

up and building an organization and a management structure based around doing this new product—the Apple III.

THE APPLE III

We had some problems getting things done on time with the Apple III because of (a) our lack of experience as a group working together, and (b) not being able to predict project lengths well enough.

We started hiring intermediate levels of managers. Sometimes the managers were getting hired at a rate that added a completion date to the project faster than it was getting completed.

Around this time we started developing a perception of market separations—good strong separations between products so they don't overlap. You don't want to design a product that competes heavily with your own existing product. I claim that's untrue. What you really don't want to do is design a product that doesn't offer any more than your existing product.

So we started setting up strong boundaries. The Apple III would be our 80-column business machine and have 90 percent of our market. The Apple II would be our 40-column home/school machine and have 10 percent of our market. The entire executive staff was sure that once the Apple III was out, the Apple II would stop selling in six months. I felt really down, because this 10 percent were my friends—the hobbyists and home users.

The Apple III hurt Apple in many ways, but it was a very well conceived product. And because we were so successful with the Apple II, we decided to build in an Apple II emulation mode to take advantage of all the software that was out there. The emulation mode did get built in, but, because of our concept of market separations, it was a very limited emulation. While our Apple II customers were adding 80-column cards and 16K RAM cards to their machines, we actually added chips to the Apple III to prevent access to many of its features during emulation mode. In emulation mode you only had access to 48K of memory—you couldn't use the 80-column display, the extra graphics modes, or the extra memory. The emulation mode wouldn't even run much of the existing Apple II business software, and there wasn't much Apple III software available.

Originally, we planned to deliver four applications with the Apple III—word processing, a spreadsheet, business graphics, and a database program. Steve Jobs's thinking at the time was, "People don't really want to buy a computer. They don't want to know about microprocessors or cards or buses. They want to buy VisiCalc—they want to buy a solution." So we were going to provide the four major solutions. But because we were having problems managing the Apple III project while we were building our management structure, we were only able to deliver our operating system—SOS—and VisiCalc, which was done by Personal Software [which later became VisiCorp].

The Apple III shipped very late and had 100 percent hardware failures. This is very subjective, and some people might disagree with me, but I think we were trying to be too pure. We wanted to do it on one PC board, not two, and it didn't fit on one PC board. So we got a company that could put three traces between two IC pins, had them do the PC board, and 100 percent of the Apple IIIs failed.

The Apple III is really very good, but we spent three solid years keeping the Apple II down, and now it's finally being allowed to grow in that direction. We've come out with ProDOS, which is a major improvement, and the ProFile [hard disk] is available for the Apple II now. It's a good start. I think they are going to find out that allowing the Apple II to get there will improve the whole Apple image.

The III will do very well in its established vertical markets forever, but it really won't make the huge success we thought it would. It may have the best chance it's ever had. ProDOS is the best way to get someone closer

(continued)

'We did SOS 3 years ago, and the rest of the world hasn't caught up.'

to SOS. We did SOS three years ago, and the rest of the world hasn't caught up or come close to it. Macintosh went in a different direction, so I can't compare the two systems.

BYTE: *Is SOS really that good?*
WOZNIAK: I think it's the finest operating system on any microcomputer ever. It's the greatest thing in the world, but I wish we gave out listings of it.

BYTE: *Wasn't it the first commercial system that actually had installable device drivers?*
WOZNIAK: Yes, the Apple II uses device drivers in ROM, on the I/O cards, but they won't work on the III because they depend on specific memory locations. On the III, you load a device driver into RAM for any device you add to a system, so it's infinitely flexible. You can always change it, correct bugs, and it's clean. But it's more difficult for outside manufacturers, because they have to supply a disk and instructions on how to update your system. It would have been the best of both worlds if you could plug in a card with a ROM on it and if the first byte in the ROM were a 12, for example, the system would recognize that the ROM holds a device driver and link to it automatically. That would have made it much easier for the card manufacturer. It would have been really easy to allow both techniques, but the Apple III engineering group didn't want to do anything the way it was done on the II. Marketing just didn't have enough leadership and control.

Anyway, having the Apple III as a failure didn't really hurt the company much. The Apple II was still very healthy, but for the next three years the Apple III hurt the company tremendously because everyone in Apple knows how great a machine the Apple III really is. It's a very clean machine, it's easy to use, and it's really been organized right with the operating system.

Unfortunately, we made it very difficult for anyone to get access to the insides of the machine. We had hired some very bright people who figured, "This is the right way it should be done. So we'll give out enough information to do this and we won't give them any more, because they might try to do something they're not supposed to do." The right way for one person is not the right way for another. We closed that machine up to where somebody could have a very difficult time finding out how to add their own I/O drivers. We did not make it easy for the outside world. We thought we wanted all of the markets for ourselves.

You have to let the end users develop their own standards. You've got to give them the freedom to discover how they're going to use an operating system, what sort of things they're going to buy. And if you're really right and have provided a good solution, that's where they're going to settle. The thinking on the III was very much like a religion in that it could only be done one way—our way. We made it very difficult for outside developers, instead of providing all the information as we did with the Apple II.

BYTE: *Has that attitude changed now?*
WOZNIAK: No. It's still the most negative thing in our whole company, and it will be for years.

I think that when a new market

(continued)

BYTEK®
HIGH PERFORMANCE LEADER
EPROM PROGRAMMERS & UV ERASERS
GANG MULTIPROGRAMMER™
S15-G $995
• Stand Alone or RS232
• Detachable keyboard (opt.)
• Programs over 400 devices
• Bipolar • Microchips (opt.)
• 3 Voltage EPROMS (opt.)
UV MULTIERASER™
• Built-in safety switch
• Removable anti-static UNITRAY™ (opt.)
• 1 Hour Timer (opt.)
$67
BUV-3 C
ORDER NOW &
RECEIVE KEYBOARD MODULE FREE!
1-800-53-BYTEK
BYTEK® Computer Systems Corp.
4089 S Rogers Circle
Boca Raton FL 33431
(305) 994-3520
Telex: 4310073 MEVBTC
Distributor Inquiries Welcome

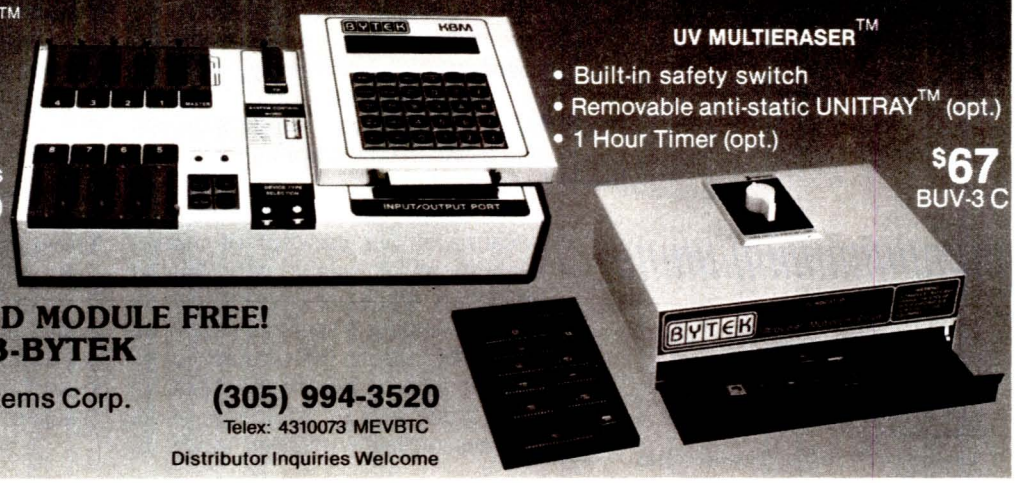

Inquiry 44

TOLL FREE ORDERS ONLY! 800-631-0962

(INSIDE CALIFORNIA) 800-521-6162

Customer Service HOTLINE (408) 371-9078

GUARANTEED the LOWEST!

OUR PRICE GUARANTEE – It's Simple! We'll beat any ad in this magazine – same terms – call TOLL FREE for details!

DCC DISCOUNT COMPUTER CENTERS

OUR CUSTOMER SATISFACTION GUARANTEE: If for any reason your DCC purchase fails to meet manufacturers specifications within 30 days of purchase, please return it to us for a full refund or exchange of your choice! Sorry, software excluded due to copyright laws.

EPSON all models! RX/FX and LQ1500 also **NEW** JX80 (7 colors)

PRINTER SALE!!!

models 82/83/84 and 92/93!! also 2410 (360 cps!)

OKIDATA

IBM PC or 2 drives/256K, 10 mg hard disk **$1695** 2 drvs 256K

$2495

IBM XT 10 mg. hard disk 256K, 1-360Kb drive only **$3495**

FRAMEWORK $355

ASHTON • TATE

*****SPECIAL*****

$355 dBASE III

COMPUTERS

IBM PC & XT	See special above!!!
PC with 1 drive/64K	1395
PC with 1 drive/256K	1575
PC with 2 drives/256K	1695
PC with 10mg HD/2 drvs/256K	2495
XT with 1 drive/128K	3449
XT with 2 drives/256K	3695

MONITORS

IBM MONOCHROME	259
COLOR	589
AMDEK 300G	129
300A	145
310A	165
COLOR 600	419
COLOR 700	469
TAXAN 12" Green	114
12" Amber	117
420 RGB	439
PRINCETON HX-12	467
SR-12	649
MAX-12	184
ZENITH 122 – 12" G	93
12" A	93
124 MONO – IBM	169
133 RGB	446
135 RGB/COMP	475

MODEMS

HAYES 300	199
1200	468
1200B IBM INTERNAL	389
MICROMODEM II E	209
ANCHOR MARK XII	259

QUADRAM 384K QUADBOARD w/64K RAM $249

PRINTERS

*****DOT MATRIX*****

EPSON RX 80 100 cps	239
RX 80 F/T 100 cps	294
RX 100 100 cps, 132 col.	399
FX 80 or JX 80	best price
FX 100 160 cps, 132 col.	in
LQ 1500 200 cps NEW!	magazine
OKIDATA 82A/83/84	Save
92P	All
93P	Models
2410	Drastically Reduced!!
GEMINI 10-X	239
15-X	349
DELTA 10 or 15	Special
RADIX 10 or 15	$Call

*****DAISY WHEEL*****

PRIMAGE I 55 cps, SER/PARR	1395
w/Cut Sheet Feeder	1695
BROTHER DAISY WHEEL	
HR-15	339
HR-25	569
HR-35 (36 cps)	769
JUKI 6100	409
JUKI 6300	749
DIABLO 620	829
36	1276
630	1689
DYNAX DX-15	339
NEC all models	$Call
QUME all models	$Call

DRIVES

IBM 360 KB	219
TANDON 100-2 360KB	185
APPLE DRIVES Sale	149

AST $229 SIX PAK PLUS w/64K RAM $249

TEAC ½ HI-360 KB	124
SHUGART ½ HI-360 KB	115
COGITO 10 MG H.D. W/CONTRL	699
ATARI INDUS GT	349

IBM SOFTWARE

*****SPREADSHEET*****

FRAMEWORK Monthly Special	355
FRIDAY	195
SUPERCALC 3	228
MULTIPLAN	136
IBM WORDPROCESSORS	
WORDSTAR PRO PACK	249
PFS WRITE	84
MULTIMATE	249
WORD W/MOUSE	269
VOLKSWRITER DELUXE	159
PFS PROOF	84
IBM DATA BASE	
dBASE II	284
dBASE III	355
PFS FILE	84
CONDOR III	249
R-BASE 4000	279
R-BASE CLOUT	129
IBM MISC	
SIDEKICK	45
COPY II PC	29
THINKTANK	129
PROKEY 3.0	79
HARVARD PROJECT MGR	245
SIDEWAYS	45
NORTON UTILITIES	55
PFS REPORT	79
DOW JONES ANALYST	219
SET FX +	47
IBM GAMES	
FLIGHT SIMULATOR	34
PINBALL	39
MATHBLASTER	45
FROGGER	28
ULTIMA III	35
ZAXXON	35
GATO SUB SIMULATOR	35

WORDSTAR PRO PACK • Wordstar • Star Index • Correct Star • Mail Merge only **$295**

IBM – BOARDS

HERCULES GRAPHICS	315
HERCULES COLOR New!	175
AST SIX PAK W/64K	249
MEGAPLUS	259
STB GRAPHIX PLUS	322
EVEREX GRAPHIC EDGE	379
H.D. CONTROLLER	299
MAGIC CARD	199
QUADRAM QUADBOARD W/64K	269
QUADLINK	449
IBM MONOCHROME	249
COLOR GRAPHICS	219
PLANTRONICS COLOR PLUS	358
MA SYSTEMS PC PEACOCK COLOR GRAPHICS	235
TECMAR GRAPHICS MASTER	475

IBM ACCESSORIES

64K RAM CHIPS 200ns	39
150ns	39
IBM KEYBOARDS	179
KEYTRONICS 5151 NEW!	199
5150	189
MICRO-SOFT MOUSE	144
MOUSE SYSTEM-MOUSE	139
KOALA PAD	85
JOYSTICKS – KRAFT/HAYES	45

COGITO 10 MG HARD DISK • ½ Hi Internal • Controllers Card and Cables! **$699**

APPLE – BOARDS

ORANGE MICRO GRAPPLER + BUFFERED w 64K	113
MICROMAX GRAPHMAX	168
VIEWMAX 80	99
VIEWMAX 80E W/64K	139
MAC DISKETTES	189
IIc PRINTER INTERFACE	26
SUPER COOLING FAN	59

ACCESSORIES

PRINTER RIBBONS all makes	Low!!!
64K RAM chips SALE	39
VERBATIM SS/DD diskettes	21
DS/DD diskettes	27
DYSAN SS/DD diskettes	26
DS/DD diskettes	34
DISK MINDER-PLEXI (75)	19
DISK MINDER W/KEY (100)	24
SURGE PROTECTOR Compugard	59
PTI POWER BACK-UP 200 w	299
300 w	399
FINGERPRINTS – EPSON all models	48
PRINTER DUST COVER all models	10
MONI-BASE Monitor Stands	19
COMPUTER PAPER all makes	Low!!!
PRINTER STANDS Plexiglass	29/39
SURGE PROTECTORS	$Call

ATARI/C-64

ACCESSORIES low, low	CALL!!
C-64 CARDCO +G	79
ATARI MP1150	94
APE FACE	69
GRAPPLER CD COMMODORE	99

SHUGART ½ Hi-Drives $119

IBM™ $219 360Kb drvs.

DCC DISCOUNT COMPUTER CENTERS

an established mail order/retail distribution network

BUYER FRIENDLY TERMS! • **DELIVERY** We ship immediately! Most orders delivered within 5 days! Add 3% ($5.00 min) for UPS shipping, handling, insurance. Calif. residents add 6.5% sales tax. 2nd day UPS available at extra charge. • **PAYMENT** Visa, M/C, cashiers checks, money orders, personal checks accepted. (Allow 10 business days for personal/company checks to clear). **WE NEVER CHARGE EXTRA FOR CREDIT CARDS!** C.O.D.'s welcome (20% p/p deposit) with cash, certified check or money order. • **WARRANTY** All items shipped are new, include **FACTORY WARRANTY** and are **GUARANTEED TO WORK. DCC** is an **AUTHORIZED DEALER** and **SERVICE CENTER** for most major brands. • **RETURNS Must** be accompanied by **RMA** number (supplied by DEALER) and may be subject to a 20% restocking fee. Prices and availability subject to change without notice. All items limited to stock on hand. • **MAIL ORDER PRICES NOT VALID AT RETAIL OUTLETS DUE TO REGIONAL PRICING RESTRICTIONS.** Minimum order $50.00.

FREE – VISA/MC!

VISA MasterCard

1707 S. BASCOM AVE • SAN JOSE, CA 95008 • (408) 559-6555

1243 W. EL CAMINO • SUNNYVALE, CA 94087 • (415) 965-4494

1341 FULTON AVE • SACRAMENTO, CA 95825 • (916) 971-3503

VISIT OUR DISCOUNT SHOWROOMS!

Inquiry 387

Z80 System Owners Join The 16/32 Bit Revolution Through Evolution



Starting At $695.00

CO-PROCESSING

The most cost effective way for Z80 system owners to obtain 16/32 bit processing power and software compatibility is via the HSC CO-16 Attached Resource Processor.

CO-16 is compatible with any Z80 system running CPM 2.2 or CPM 3. A few examples include:
• KAYPRO 2/4/10 • TRS 2/12/16
• AMPRO LITTLE BOARD
• HEATH 89 • SUPERBRAIN
• XEROX 820 • TELEVIDEO 802/803
• MORROW • EPSON QX-10
• LOBO • OSBORNE 1/EXEC
• CROMEMCO • Plus many more

CO-16

Every CO-16 is delivered with • 16/32 bit micro processor • 16 bit Operating System • 256 Kilo RAM • Z80 interface • 16 bit RAM disk driver • CPM80 2.2 RAM disk driver • CPM 2.2 or CPM 3 compatibility • sources with tools • hardware diagrams • board level or case with power supply.

CO-1686

The only Z80 16 bit co-processor includes • INTEL 8086 • 6Mhz no wait states • MSDOS 2.11 • IBM BIOS emulator • Memory expansion to 768K • 8087 math co-processor • 3-channel Real Time Clock • Runs many IBM PC applications • Shares hard disk space with CPM80 • PC diskette compatilibility on many systems • CPM86 • Concurrent CPM is coming.

CO-1668

The only Z80 16/32 bit co-processor includes • MOTOROLA 68000 microprocessor • 6 Mhz no wait states • CPM68K • Full "C" compiler with UNIX V7 library and floats • Memory expansion to 1.25 million bytes • NS16081 math co-processor • Real Time Clock • Complete software development environment • 100% file compatible with CPM80 • OS9/68 UNIX look alike coming in February.

Hallock Systems Company
262 East Main Street
Frankfort, New York 13340
(315) 895-7426

HSC INC

evolves, like personal computers did, there's a period of time when you've got to let the world go in all random directions, and eventually it will subside because it wants standardization. Then, once it's obvious what the standards are, they should be heavily supported by the manufacturer. You can't try to dictate a standard.

THE APPLE II AND THE APPLE III

When we came out with the Apple III, the engineering staff canceled every Apple II engineering program that was ongoing, in expectation of the Apple III's success. Every single one was canceled. We really perceived that the Apple II would not last six months. So the company was almost all Apple III people, and we worked for years after that to try and tell the world how good the Apple III was, because we knew.

There is a lot to somebody's perception or image of a machine and how good it is. How many of my friends have them? How many people in the world have them? The Apple III was a failure the first year as a product—it had a bad image. When you give a bad first impression, you can go for five years trying to overcome it.

If you looked at our advertising and R&D dollars, everything we did here was done first on the III, if it was business related. Then maybe we'd consider doing a sub-version on the II. To make sure there was a good boundary between the two machines, anything done on the II had to be done on a lower level than on the III. Only now are we discovering that good solutions can be implemented on the II.

The Apple II was kept out of the business market to keep the III going, to give our users only one choice. We wanted to make the III the success it hadn't become and that it deserved.

Unfortunately, we made sure that the Apple II was nowhere close to the market that the [IBM] PC took. We made sure the Apple II was not allowed to have a hard disk or more than 128K of memory. At a time when outside companies had very usable schemes for adding up to a megabyte of memory, we came up with a method of adding 64K to an Apple IIe, which was more difficult to use and somewhat limited. We refused to acknowledge any of the good 80-column cards that were in the outside world—only ours, which had a lot of problems.

At one point during the Apple III development, I wrote some fast disk routines for our Pascal system on the II. And I got a lot of flak from Apple III engineers who felt that they shouldn't go on the Apple II. Nothing on the II should be allowed to run as fast or faster than the Apple III. That was the thinking that stuck with the company for three solid years.

It was unfortunate the way things worked out, because we probably put $100 million in advertising, promotion, and research and development into a product that was 3 percent of our revenues. In that same time frame, think what we could have done to improve the Apple II, or how much could have been done by Apple to give us products in IBM's market.

BYTE: *Are you putting more resources to work in that direction now?*

WOZNIAK: Yes, but things don't change in six months. In the Apple III we had a beautiful machine, and we spent a lot of money to try and emphasize that. We were trying to force the world to finally accept the machine because we knew just how good it was.

The PCjr had a poor initial reception like the Apple III did. It came out in the wrong month—the month when Macintosh was going to be perceived as the leader. The PCjr was perceived as an uninteresting product.

They may try for three years to overcome its bad first impression. They may put a lot of their corporate resources into trying to promote the PCjr and lose sight of the PC. The PC will keep selling because it's been accepted and there are a lot of aftermarket companies out there selling software and hardware for it. But if IBM neglects it enough, we may have a chance to turn it over on them in the next few years if we have a better product. ■

COMPUTERS and more. . .

is *your* place to buy for SELECTION, SERVICE and SAVINGS.
We know that your needs are not the same as everyone's, so we don't treat you "just like every one else."
Your needs are special. That's why *COMPUTERS and more. . .* is your place to buy for. . .



"Tomorrow's Technology at Prices You Can Afford Today"

COMPUTERS

IBM

256 PC w/2 1550
PC/10 Meg 1-320K 1995
PC w/dual & 10 Meg.2795
New At ..... On Sale!
Warranty Included!

APPLE

Hot New IIC ..... CALL
MAC-All Models ... CALL
LISA-All Models ... CALL
Apple IIE ..... CALL

LEADING EDGE

PC-1 1395
PC-2 1549
PC4 1956
PC5 2349
PC6 2695
Nutshell 119

COLUMBIA

MPC 4210 1895
MPC 4220 2079
MPC 4620 3359
MPC 4820 3795
MPC 4750 4129
VP 2220 2059
VP 2116 1276

TELEVIDEO

TPC-II ..... On Sale!
1605 Color ..... CALL
PM/16 ..... CALL

CORONA

Desktop w/2 Drives 1795
Portable w/2 Drives1959
Hard Disk Models... CALL
Multi-User System CALL

NEC

8201-A (Portable) ... 389
APC I ..... CALL
APC II ..... FOR
APC III ..... LOW
APC IV ..... PRICE

COMPAQ

Portable w/2 Drives On Sale
Portable w/Hard ... CALL
New Models Now Shipping

SANYO

550 ..... ON
555 ..... SALE
550-2 ..... NOW!

ZENITH

151-21 1795
151-52 3490
161-21 1990
Portables ..... CALL

CALL FOR PRICES ON:
KAYPRO • SHARP • COMPAQ • EAGLE • OTRONO • NOVELLE • NORTHSTAR • ALTOS • DEC • EPSON •

ACCESSORIES

IBM

Hercules Color Card 199
Vutek CPS Cd 229
Keytronic 5151 — 5151 Jr. 209
Bi-Graphics I 459
Bi-Graphics II 229
Smart Cable by I.Q. 64
Jr. Extender by Falcon ..... CALL
UltraPak byTSENG 489
UltraRam by TSENG 199
Multidisplay by PS ... 239
Plantronics Color Plus 299
Orchid Blossom 299
Orchid PCnet 389
Orchid Combo ... CALL

AST-6 PAK 239
Quad Link 469
PC Saver 39
TG Joystick 44
64K Ram Chips .. CALL

CALL FOR PRICE LIST!!

APPLE

DiscWasher Cart ... 199
PrinterFace by P.P. . 64
Graphicard by P.P. . 79
Z-80 Card 69
Touch Pad by Koala 84
MicroSoft Acces. . CALL
Grappler Plus 109
Videx 80 Col w/Sft Switch 179
Wesper Full Graphics 78
System Saver FAN 67

WE'VE EXPANDED TO A NEW LOCATION TO SERVE YOU BETTER



PRINTERS

JUKI

Juki 389
Tractor 109
6300 ..... CALL

EPSON

RX-80 219
FX Series ..... CALL
LQ 1500 1059

DAISYWRITER

Daisy 200 859
New Models ..... CALL

PANASONIC

1090 219
1091 279
1092 399
1093 589
Ribbons (with purchase)...8

QUADRAM

QuadJet 695
IBM Kit 19
Apple Kit 49

NEC

New! Pinwriter 2 .... CALL
New! Pinwriter 3 .... CALL
2030-Parallel 679
2050-Parallel 889
3510-RS232 1299
3515-RS232 1299
3530-Parallel 1279
3550-Paralell 1599
Extended Warranties CALL

TOSHIBA

Toshiba P1351 P ... 1259
Toshiba P1351 S ... 1259
Toshiba P1340 ser ... 749
Toshiba P1340 Par ... 749

MANN-TALLY

Spirit 294
160-I 539
160-L 619
180-I 769
180-L 849
420-I-123 2369
420-L-112 1939

CITIZEN

MSP-10 394
MSP-15 649
Ribbons, Supplies at Low Prices ..... CALL

STAR

STX-80 137
Gemini 10X 239
Gemini 15X 349
Delta 10 339
Delta 15 469
Radix 10 494
Radix 15 567
X-War Avail. All Models

OKIDATA

MicroLine 84 P ..... CALL
MicroLine 92 P ..... CALL
Pacemark 2350 P ... CALL
Pacemark 2410 P ... CALL

FREE * SHIPPING

"MODEMS"

HAYES

II C Compatible w/Sft 259
MicroModem IIe 229
Hayes 1200B 389
SmartModem 300-RS232 . 219
SmartModem 1200-RS232 . 539
ChronoGraph RS232 199

U.S. ROBOTICS

IBM PC Modem 369
Password 300/1200....357

VEN-TEL

1200 Plus 384

RIXON

R 103J ASYNC 229
PC 212A IBM Internal 429
PC 212A-WA w/ASYNC Port ... 499
R 212A-I RS232 429

NOVATION

Access 1-2-3 399
J-Cat 99
103 Smart Cat 189
212 Auto Cat 397
Apple-Cat II 229

DISK DRIVES

FLOPPY DRIVES

Tandom 100-2 169
Slim Line Drives ... 149
Apple Compatible ... 159

FUJI DISKETTES
SS DD 22
DS DD 27

HARD DISK

10 Meg Internal 895
QuarterMaster ON SALE!
10 Meg External ... 1095
15 Meg External . CALL
Bernoulli by Iomega 2799

QUADRAM • TECMAR • CONTROLL DATA

SOFTWARE

FOR PC & XT

OZ by Fox & Geller ... 299
Quick Code 219
FrameWork by ..... SALE!
dBase III 419
Friday 199
Please by Hayes .... CALL
Lotus 1-2-3 275
Mayday by Teletek CALL
Symphony by Lotus SALE
Upgrades for 1-2-3 CALL
DESQ ..... CALL
Inves.Anyl.by Dow Jones
Market Analyzer 249
Market Manager 219
PFS: Acess 65
PFS: File 89
PFS: Write 89
PFS: Report 84
Bankstreet Writer 47
EasyWriter II by IUS ... 269
Dow JOnes Soft .... CALL
Volkswriter Delux 179
R-Base by MicroRim ... 319
WordStar ..... ON SALE!
MBSI Real World ... CALL
T.I.M. 329
VersaForm 279
Call for Complete Price List

APPLE

dBase III by Ash/Tate 419
Friday by Aston-Tate 199
Bottom LIne Strategist 269
C DexPackages (ea.) ... 39
CPA Modules 1 thru 4 ..... (each) 174
OZ by Fox & Geller ... 319
Graphox 197
Sales Edge 174
Format IIe 104
Knoware 64
Master Type 27
Micro Pro ..... CALL
Micro Soft ..... CALL
PFS: Access IIe 49
PFS: File II 84
PFS: File IIe 84
The Handlers (all) 149
Terrapin Logo 99
VersaForm 259
BPI GL 267
Pie Writer by Hayden 97
Persona Pearl 194
Dow Jones ..... CALL
Lock Smith 78
Zork-I, II or III (ea.) 26
Deadline 33
Flight Simulator II 37
Jack Report 74

MONITORS

Roland DG-121-G 139
Roland DG-121-A 249
Roland CB-141 319
Roland CC-141 595
Taxan 420 389
Taxan Amber 119
Taxan 415 499
TGB-80 col IIe 139
RGB Card IIe 89
Quadchrome 559

Quadscreen w/Card 1650
Zenith 131 319
Zenith 135 487
Zenith 122 109
Amdek 310 159
Amdek Color IV-T . 597
NEC JC 1215 269
NEC JC 1216 397
Amdek 300 G 134
Amdek 300 A 144

TERMINALS CALL

SERVICE

WE OFFER EXTENDED WARRANTIES ON ALL OF OUR PRODUCTS. OUR EXPERIENCED TECHNICIANS ARE HERE FOR YOU!



COMPUTERS and more. . . .

8265 Commercial Dr., La Mesa, CA 92041

1-800-433-9449

For CA, HI and Alaska **(619) 466-4895**

MasterCard VISA

NEW NEVADA LOCATION!

680 GREENBRAE DR., #234
SPARKS, NEVADA 89431

CALL TOLL-FREE 1-800-621-0852 ex 988

NO SALES TAX!

All prices subject to change and availability
Apple. IBM are registered trademarks.

P.O.'S ACCEPTED ON APPROVAL

* On All Pre-paid Cash Orders In Cont. U.S.

BIG TIME STATISTICS GO SMALL



Statpro™ brings the power of mainframe statistics to your personal computer.

Until now, serious statistical analysis meant mainframes, computer centers and a lot of extra work for you.

Enter Statpro, the most powerful statistical software system ever developed for personal computers.

It lets you do almost everything you do on a mainframe on your IBM® or Apple® personal computer. Including descriptive statistics, regression, ANOVA, factor and cluster analysis, to name just a few capabilities.

And Statpro's awesome power isn't limited to number crunching. You can plot all your results in four-color graphics, such as scatter, triangle and regression plots, dendrograms, histograms and pie charts.

What's more, Statpro has sophisticated database management capabilities which make entering, manipulating, transforming and editing data quick and easy.

Most important of all, you get this incredible power in one integrated, fully documented, easy-to-use package for only $795.

Discover Statpro's capabilities for yourself. Call us toll-free today to order a Statpro demonstration package. We'll have it on its way to you within 24 hours.

800-322-2208

In Massachusetts call (617) 423-0420.
Or call your local dealer.

Wadsworth Professional Software

Statpro is a trademark of Wadsworth Professional Software, Inc. Apple is a registered trademark of Apple Computer, Inc. IBM is a registered trademark of International Business Machines Corp.

Inquiry 367

BY WILLIAM RYNONE

UNINTERRUPTIBLE POWER SUPPLIES

Devices to save you from losing data in the dark

Advertisements for uninterruptible power supplies (UPSs) proliferate in computer magazines. But do you know what they are or how to buy one? This article should help answer your questions.

Many users of small computers have suffered the nasty consequences of an electrical power loss while operating their systems. You can lose a long file that is in working memory. Your disk head may crash, destroying a floppy disk or doing irreparable damage to a Winchester or cartridge disk. Most disk destruction occurs when the computer is reading from or writing to the disk at the instant of power failure. Consequently, serious damage can result should you panic at the flickering of your overhead lights and attempt to "save" your work.

One way to temporarily retain your working data during a power failure is to connect batteries to the power-supply bus lines. For an S-100 system you'll need three different battery voltages: +8 volts (V), +16 V, and −16 V. This is a short-term solution, acceptable only if power returns within a reasonable period (that is, before the batteries die).

Though the preceding measure may protect data in working memory, your computer must maintain 117 V AC in order to store and retrieve data. Unless full power returns, you won't be able to save your data. And, of course, if the batteries can maintain only bus voltages, your disk hardware remains unprotected; you may have already experienced a head crash.

Another alternative to protecting both data in active memory and your hardware is to use a source of 117-V AC power that is independent of the anomalies of your local public utility. There are two approaches to this method: continuously supply power

(continued)

William Rynone teaches in the department of electrical engineering at the U.S. *Naval Academy* (Annapolis, MD 21402).

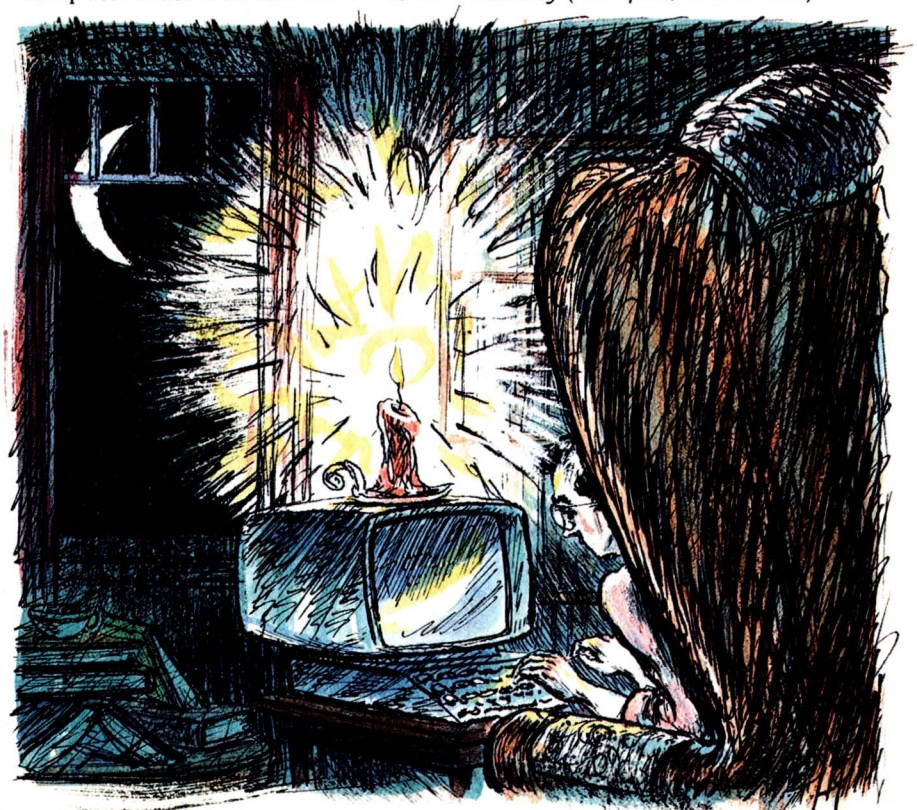

ILLUSTRATED BY STEVE SALERNO

to your computer with a continuous-duty UPS or supply power only when the electricity fails, using a standby power supply. (In this article, I'll use the term UPS to describe both types of units, differentiating when necessary.)

A continuous-duty UPS supplies power to your computer all the time. The 117-V AC power is developed by a static inverter that uses a storage battery, or batteries, depending upon your power requirements. The batteries are continually charged by power from your local utility. Simultaneously, the inverters are synchronized to the utility-line frequency—60 Hz—to eliminate any undesired effects upon the computer system. Such an effect might be a beat frequency between the utility's power and the frequency of the power generated by the free-running static inverter.

Under normal operation, the inverter frequency is maintained in power-line sync via a phase-locked loop circuit quite often operated in conjunction with a ferroresonant circuit, which may be thought of as a tuned inductance-capacitance oscillator. When the line power disappears, the inverter frequency drifts slowly to a factory-preset 60 Hz. The line frequency must change gradually so as not to induce any transients. Similarly, when power returns, the frequency of the inverter is gradually synchronized with the power company's line frequency. Many continuous-duty UPSs are designed to switch the computer input connections back to the utility's power line when the inverter fails.

Standby UPSs are maintained in a ready state with their battery, or batteries, receiving a trickle charge. When the utility's power-line voltage falls below a preset level, the inverter

Table 1: *Standby uninterruptible power supplies compared according to manufacturer specifications. Some information may have changed since press time.*

MANUFACTURER	MODEL	PRICE PER UNIT	POWER RATING (WATTS)	CUT-IN VOLTAGE	TRANSFER BACK TO LINE
Cuesta Systems Inc. 3440 Roberto Court San Luis Obispo, CA 93401 (805) 541-4160	9012060	$350	90	102 V	106 V
	20012060	$495	200	102 V	106 V
Electronic Protections Devices POB 673 Waltham, MA 02254 (800) 343-1813	Grizzly 200 (with surge protection)	$895	200	93 V	97 V
General Power Systems 1400 North Baxter St. Anaheim, CA 92806 (714) 956-9321	GPS-0.1K126R	$495	100	102 V	109 V
	GPS-0.2K126R	$595	200	102 V	109 V
	GPS-0.3K126R	$695	300	102 V	109 V
	GPS-0.5K126R	$895	500	102 V	109 V
Kalglo Electronics Co. 6584 Ruch Rd. Bethlehem, PA 18017 (800) 524-0400	LS-240	$485	240 VA	102 V	106 V
	LS-480 (both have multistage surge suppression and RFI filtering)	$795	480 VA	102 V	106 V
Meirick Inc. Power Systems Division POB 298 Frisco, CO 80443 (303) 668-3251	MI 400	$495	400	102 V	106 V
	MI 800 (both have surge protection and spike and line filtering)	$795	800	102 V	106 V
PTI Inc. 320 River St. Santa Cruz, CA 95060 (408) 429-6881	Datashield PC-200	$359	200 (240 VA)	108 V	102 V
	XT-300	$499	300 (380 VA)	108 V	102 V
	MU-800 (all have spike, EMI, and RFI protection)	n.a.	800 (1000 VA)	108 V	102 V

is switched in. A simple relay coil that detects the loss of power-line voltage can trigger the switch. In other cases, very elaborate electronic sense circuits can trigger the standby UPSs, based upon parameters such as the absolute line voltage, the rate of decay of the line voltage, the occurrence of line transients, or whether the frequency and phase of the inverter are in sync with the decaying utility-line voltage.

UPSs are classified in different ways. Manufacturers may specify a voltage level at which the standby UPS will be activated—the "cut-in level"—or they may specify a switching time for the UPS to come on line—the "reaction time"—when there is a complete loss of power. Neither figure by itself is adequate for making a purchase decision. One UPS cut-in voltage may be sufficient to power your system, but it may have a long reaction time. A long reaction time can result in a loss of data in working memory. Even more serious is the probability of disk-drive damage that can occur during a lapse of 117-V AC power. Another manufacturer rates the reaction time of its standby UPS at less than one cycle of the AC line voltage, equal to 16⅔ milliseconds (ms). However, the cut-in level when the line voltage is decreasing slowly is 80 V rms (root mean square), well below the necessary 117 V AC. The effect on your computer components at this level is, at best, unpredictable.

How critical is the reaction time relative to your hardware? Your main system box contains large filter capacitors if it uses linear power supplies (with switching power supplies, capacitor filtering may be minimal), and a 10- to 25-ms reaction time for a UPS won't significantly affect operation.

(continued)

ALLOWABLE LOAD POWER FACTOR	TRANSFER TIME OF UTILITY TO UPS	OUTPUT VOLTAGE	EXTERNAL BATTERY TERMINALS	OPERATING PERIOD ON INTERNAL BATTERY AT RATED LOAD
does not matter	10 ms maximum; 8 ms typical	102 – 132 V, stepped sine wave	yes, 10.8 – 14 V	at least 5 minutes at full load; at least 15 minutes at half load
does not matter	10 ms maximum; 8 ms typical	102 – 132 V, stepped sine wave	yes, 10.8 – 14 V	at least 5 minutes at full load; at least 15 minutes at half load
1.7 A at 200 W	8 ms maximum	102 V AC, stepped sine wave	no	20 minutes at full load
0.8	less than 2 ms	115 V AC	yes	9 minutes at full load
0.8	less than 2 ms	rms	yes	16 minutes at full load
0.8	less than 2 ms	rms	yes	18 minutes at full load
0.8	less than 2 ms	rms	yes	10 minutes at full load
0.6	4 ms maximum	120 V AC, modulated pulse-width output	yes, 12 V nominal	11 minutes at full load; 27 minutes at half load
0.6	4 ms maximum	120 V AC, modulated pulse-width output	yes, 24 V nominal	11 minutes at full load; 27 minutes at half load
0.8	4 ms ± 2	140 V square wave; 115 V AC under load	yes, 12 V nominal	20 minutes at full load; 45 minutes at half load
0.8	4 ms ± 2	140 V square wave; 115 V AC under load	yes, 24 V	9 minutes at full load; 20 minutes at half load
doesn't matter for these models	10 ms maximum; 4 ms typical	120 V AC, phase-shifted square wave	no	at least 5 minutes at full load; at least 20 minutes at half load
	4 ms maximum; 1 ms typical	120 V AC, phase-shifted square wave	yes, 12 V	at least 5 minutes at full load; at least 20 minutes at half load
	10 ms maximum; 4 ms typical	120 V AC, sine wave	yes	at least 6 minutes at full load; at least 25 minutes at half load

Table 1: *continued*

MANUFACTURER	MODEL	PRICE PER UNIT	POWER RATING (WATTS)	CUT-IN VOLTAGE	TRANSFER BACK TO LINE
Qubie' 4809 Calle Alto Camarillo, CA 93010 (800) 821-4479	SB200	$329	200	108 V	108 V
	XT300 (both have surge and EMI protection)	$429	300	108 V	108 V
R. H. Electronics Inc. 566 Irelan Dr. Buellton, CA 93427 (805) 688-2047	Guardian Angel (20012060)	$495	200	102 V	106 V
	Power Angel	n.a.	800	102 V	106 V
SAFT America Electronic Systems Division 2414 West 14th St. Tempe, AZ 85281 (602) 894-6864	200 VA	$549	200 VA	102 V***	106 V
	400 VA (both have spike protection)	$749	400 VA	102 V***	106 V
Sun Research Inc. POB 210 Old Bay Rd. New Durham, NH 03855 (603) 859-7110	M60	$400	150 VA	104 V	110 V
	M60 + S	$475	150 VA	104 V	110 V
	M60 + 3	$525	300 VA	104 V	110 V
	M60 + 3S	$700	300 VA	104 V	110 V
	M60 + 6	$900	600 VA	104 V	110 V
	M60 + 6S	$1140	600 VA	104 V	110 V
	Mayday	$240	150 VA	104 V	110 V
	Mayday + S	$325	150 VA	104 V	110 V
	Mayday + 3	$350	300 VA	104 V	110 V
	Mayday + 3S	$500	300 VA	104 V	110 V
	SR3	$595	300 VA	104 V	110 V
	SR6	$995	600 VA	104 V	110 V
	(+S indicates surge protection)				
Topaz Electronics 9192 Topaz Way San Diego, CA 92123 (619) 279-0831	84461	$760	400 VA	102 V	110 V
	84462	$820	400 VA	102 V	110 V
	84462-01*	$870	400 VA	102 V	110 V
	84864	$970	800 VA	102 V	110 V
	84864-01*	$1020	800 VA	102 V	110 V
	84126-01*	$1085	1000 VA		
Tripp Lite 500 North Orleans Chicago, IL 60610 (312) 329-1777	BC-200	$359	200	85 V**	
	BC-425	$559	425	85 V**	
	BC-1000 (all have surge protection)	$1179	1000	85 V**	

* with status monitor
** may be used in series with vendor's brownout protection system; as supplied, the BC series is for complete blackout protection only
*** option for higher specification available

ALLOWABLE LOAD POWER FACTOR	TRANSFER TIME OF UTILITY TO UPS	OUTPUT VOLTAGE	EXTERNAL BATTERY TERMINALS	OPERATING PERIOD ON INTERNAL BATTERY AT RATED LOAD
doesn't matter for these models	10 ms maximum; 4 ms typical	120 V	yes, 12 V	5 minutes at full load; 20 minutes at half load
	4 ms maximum, 1 ms typical	120 V	yes, 12 V	6 minutes at full load; 20 minutes at half load
	10 ms maximum; 4 ms typical	102 V – 132 V rectangle sine	yes	2 – 6 minutes at full load; 15 minutes at half load
	10 ms maximum; 4 ms typical	120 V ± 3.5 V sine wave	no	12 minutes at full load; 35 minutes at half load
0.8	6 ms maximum; 4 ms typical	117 V ± 15%, square wave for both models	optional, 24 V	20 minutes at full load; 50 minutes at half load
0.8	6 ms maximum; 4 ms typical		optional, 24 V	10 minutes at full load; 24 minutes at half load
	16 ms maximum; 8 ms typical	120 V rms; + 3 V over 80% of battery energy; sine wave; 5% harmonic distortion	all models except SR6 have external battery terminals; SR6 has an internal gel	at least 30 minutes at full load for all models except SR3 and SR6, which have a period of at least 15 minutes at full load
	16 ms maximum; 8 ms typical			
	16 ms maximum; 8 ms typical			
	16 ms maximum; 8 ms typical			
	16 ms maximum; 8 ms typical			
	16 ms maximum; 8 ms typical			
	8 ms maximum	120 V, square wave		
	8 ms maximum	120 V, square wave		
	8 ms maximum	120 V, square wave		
	8 ms maximum	120 V, square wave		
	8 ms maximum	120 V, square wave		
	8 ms maximum	120 V, square wave		
doesn't matter for these models	10 ms maximum; 4 ms typical	120 V ± 3.5 V, sine wave for all models	no for all models	at least 9 minutes at full load; 25 minutes at half load
	10 ms maximum; 4 ms typical			at least 35 minutes at full load; 75 minutes at half load
	10 ms maximum; 4 ms typical			at least 35 minutes at full load; 75 minutes at half load
	10 ms maximum; 4 ms typical			at least 12 minutes at full load; 35 minutes at half load
	10 ms maximum; 4 ms typical			at least 12 minutes at full load; 35 minutes at half load
				at least 9 minutes at full load; 30 minutes at half load
doesn't matter for these models	10 ms maximum	120 V AC, rectangular wave for all models	no for all models	10 minutes at full load; 30 minutes at half load
	10 ms maximum			10 minutes at full load; 30 minutes at half load
	10 ms maximum			16 minutes at full load; 38 minutes at half load

Table 2: *Continuous-duty uninterruptible power supplies compared according to manufacturer specifications. Some information may have changed since press time.*

MANUFACTURER	MODEL	PRICE	POWER RATING (WATTS)	POWER FACTOR	BYPASS UPS TO UTILITY
Computer Power Inc. 124 Main St. High Bridge, NJ 08829 (201) 735-8000	OUPS48-500	$1650	500	0.75 lag to 0.9	yes, 1 second
	OUPS48-750	$1750	750	lead for all	yes, 1 second
	OUPS48-1000	$1975	1000	models	yes, 1 second
	UPS36-500M				
	– with lead-antimony battery	$1690	500		yes, less than 1 second for all
	– with small gel battery	$1710	500		UPS36 and
	– with large gel battery	$1795	500		UPS48 models
	UPS36-750M				
	– with lead-antimony battery	$1795	750		
	– with small gel battery	$1860	750		
	– with large gel battery	$1940	750		
	UPS36-1000M				
	– with lead-antimony battery	$2075	1000		
	– with small gel battery	$2140	1000		
	– with large gel battery	$2220	1000		
	UPS48-1500M				
	– with lead-antimony battery	$3500	1500		
	– with small gel battery	$3565	1500		
	– with large gel battery	$3645	1500		
Electronic Protections Devices POB 673 Waltham, MA 02254 (800) 343-1813	Grizzly 500	$2400	500	0.8	standard at
	Grizzly 1000	$5200	1000	0.8	125% overload
	(both have surge protection)				for both models
RTE Deltec Inc. 2727 Kurtz St. San Diego, CA 92110 (619) 291-4211	3056	$1995	500	1	standard
	DSU-720	$2995	700	0.8 to 1	optional
	DSU-1220	$3395	1200	0.8 to 1	optional
	DSU-1820	$3895	1800	0.8 to 1	optional
	7026	$6295	2500	0.7 to 1	standard
Sun Research Inc. POB 210 Old Bay Rd. New Durham, NH 03855 (603) 859-7110	Mayday 60 + 3C	$800	300 VA	1 for all models	optional on all
	Mayday 60 + 6C	$1325	600 VA		models
	Mayday 60 + 10C	$2295	1000 VA		
	SR30	$995	300 VA		
	SR60	$1495	600 VA		
	SR100 (220 V in, 110 V out)	$2395	1000 VA		
	SR150 (220 V in, 110 V out)	$3195	1500 VA		

POWER SUPPLIES

OUTPUT VOLTAGE	BATTERY CONNECTION OR INTERNAL BATTERY AT RATED LOAD
120 V AC, sine wave for all models	OUPS48 models operate on external battery
	120 minutes at full load
	50 minutes at full load 120 minutes at full load
	75 minutes at full load
	30 minutes at full load 75 minutes at full load
	50 minutes at full load
	20 minutes at full load 50 minutes at full load
	40 minutes at full load
	20 minutes at full load 45 minutes at full load
120 V AC, sine wave	both models have 60-V external battery; 15 minutes at full load, 12 minutes at half load
120 V AC, sine wave, 5% THD DSU models offer user-selectable sine wave, 5% THD	48-V external battery 72-V external battery on all DSU models
120 V AC, sine wave, 5% THD	72-V external battery
120 V AC, sine wave for all models except SR100 and SR150; for those models, 110 V AC, sine wave	24-V external battery 24-V external battery 48-V external battery 12-V internal gel 24-V internal gel SR100 and SR150 offer choice of lead-sulfate battery or internal gel

Keyswap 3.0

For the IBM PC;XT**and IBM**COMPATIBLES**

KEYSWAP is the most advanced Macro Processor available for the **IBM PC** - including WINDOWING** and Keyboard filtering.

KEYSWAP creates yet another dimension in **USER FRIENDLINESS.**

In addition to the standard macro features, the user can:



Create custom Help Menus that can be recalled from within any program.

Create "lessons" that can be played back at variable speed for tutorial or demo purposes

ONLINE FULL SCREEN MACRO EDITOR Create and Modify your macros at any time.

Create a single macro definition as large as 64K

ONLINE MACRO LISTING

See a listing of your macros at any time - instantly!

IMAGINE: automatic time and date display; fixed and variable definition fields; audible feedback on toggle keys; alternate cursor control selection; Keyboard customization; Condensing many keystrokes into just one.

KEYSWAP - State of the Art keyboard utility software.



PRICE
$129.00 (RETAIL)
+ 2.50 Shipping & Handling. MA res add 5% Sls. TX.

FOR ORDERS OR INFO CALL OR WRITE

RICKERDATA

PO BOX 998 MELROSE, MA 02176 (617) 662-0856

MC & VISA ACCEPTED

**Registered Trademark IBM



Hooleon COMPANY

Our complete line says it all: Touchdown™ Keytop Expanders fit over existing keys on IBM PC and most PC lookalikes. Adhesive provided insures easy removal without damage to keyboard. Touchdown™ Key Overlays re-assign, clarify or blank-out PC keytop commands; durable, non-glare surface looks and feels like original keytops.

P. O. Box 201, Dept. B, Cornville, AZ 86325

DEALER INQUIRIES INVITED—Add these unique items to your software line and reap immediate profits. Write us today or phone 602-634-7517 for complete details.

KEYTOP EXPANDERS ☐ Blk. ☐ Grey

Qty.		Price*
____	IBM PC, PC/XT, PC Port. (12 keys)	$21.95
____	IBM 5291 Display Station (13 keys)	21.95
____	Compaq, Columbia (10 keys)	$21.95
____	Corona, Eagle Spirit, Qubie, Keytronic (10 keys)	21.95

KEY OVERLAYS

Qty.		Price*
____	5250/5251 (48 keytops/fronts)	$21.95
____	5520 (95 keytops)	28.95
____	Display Write 2 (36 keytops)	21.95
____	Dvorak (43 keytops)	26.95
____	Wordstar (29 keytops)	26.95
____	Control Key English (5 keytops)	6.95
____	Blank Overlays (99 keytops)	21.95
____	Do-it-yourself Kit (154 pieces)	29.95
____	MultiMate	29.95
____	EasyWriter II	29.95
____	Lotus 1-2-3	29.95
____	WordPerfect	24.95
____	VolksWriter	24.95
____	AppleWriter II	29.95

☐ Check ☐ Money Order
☐ Visa ☐ MasterCard Exp. Date_____
Card #_____

Visa or MC orders phone 602-634-7517

*All prices include postage TOTAL $_____
Arizona residents add 5% tax _____
TOTAL ENCLOSED $_____

Company Name_____ Custom Overlay, Other Software Kits. Write for information.

Attention_____

Address_____

City_____ State_____ Zip_____

Constructing an Emergency Light Source

Unless you enjoy programming in the dark, an auxiliary light source adjacent to your UPS-protected computer is a wise idea. I use a high-intensity desk lamp that incorporates a 12-V automobile taillight bulb and a built-in 12-V transformer. Break the lead to the lamp where shown in figure A, add relay K1, and connect the battery and other wires. While the 117-V power is available, the lamp is lighted from the 117-V line. During a power failure, the relay contacts switch the lamp to the 12-V battery. You can add a single-post, single-throw switch, S1, if you want the option of turning the emergency lighting on and off to conserve battery power.

Another alternative, albeit more complicated, is shown in figure B. With this design, you can modify your high-intensity lamp with all solid-state (no relay) circuitry and include battery-charging capabilities. When nearly fully charged, the 12-V car battery will receive a trickle charge of about 30 milliamperes, guaranteeing many hours of emergency lighting from a fresh battery.

A photocopy of the printed-circuit board artwork is available from William Rynone Sr., POB 292, Ocean Gate, NJ 08740. You must include a stamped self-addressed envelope.

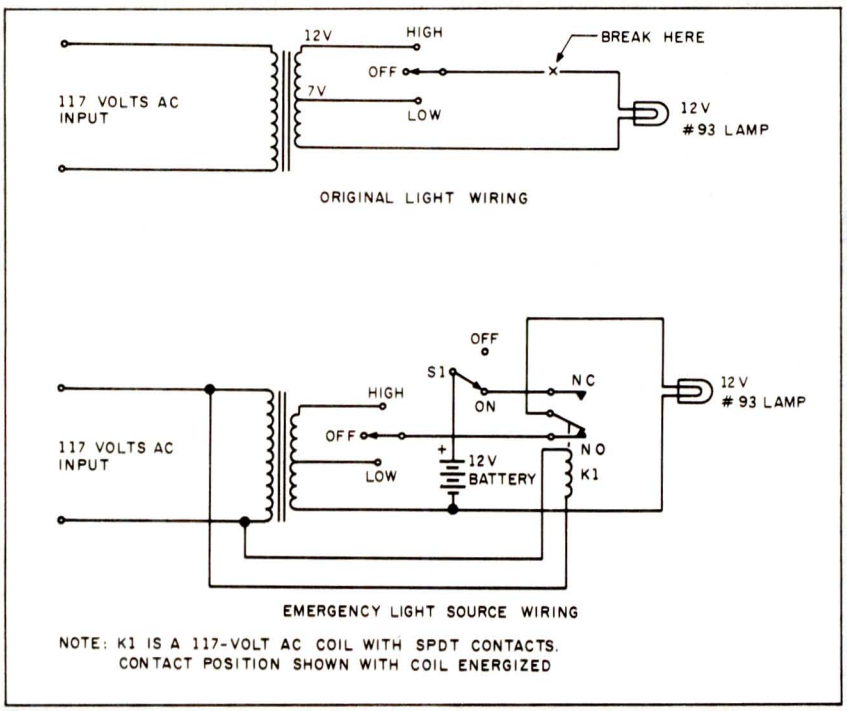

Figure A: *This emergency lighting setup powered by a UPS can keep you from computing in the dark.* (Original schematic by Barbara Campo.)

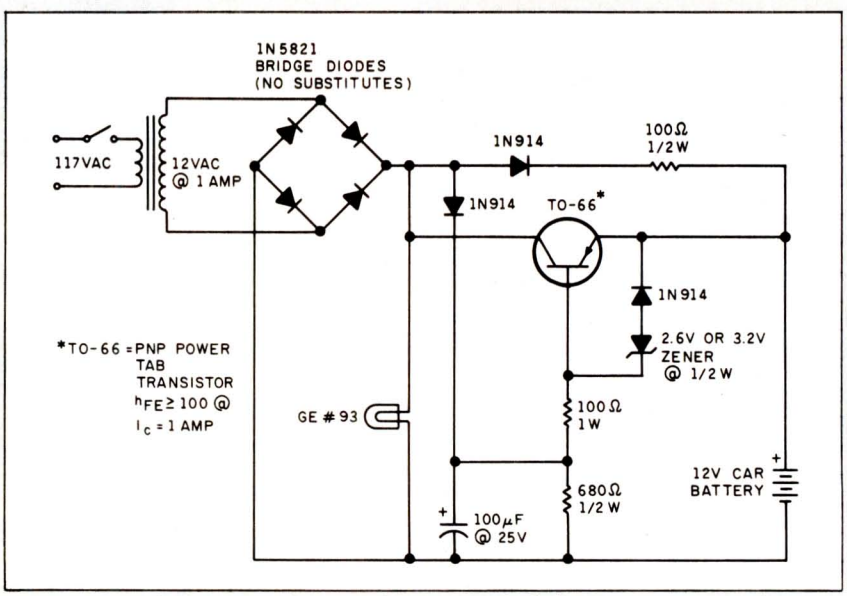

Figure B: A *high-intensity lamp modification with backup power source and battery-charging capabilities. Schottky diodes must be used in the bridge in order to maintain adequate lamp brilliance. Any* PNP *power-tab mount* (TO-66) *transistor with a gain of* 100 *at* 1 *ampere will work with this design.*

Inquiry 67 ⟶

$18,000*



$10,000**



The Choice is Yours

The time has come when one computer just isn't enough. You have a choice. . . add more personal computers or move up to multi-user with the **CompuPro 10 PLUS.**

Personal computer networks are one alternative. But in a four-user network, you'll need four personal computers plus a networking package. . . **Cost. . . $18,000.***

In contrast, the CompuPro 10 is specifically designed to be a four-user microcomputer. One fully-integrated system with multi-user capability. . . **Under $10,000.****

Price isn't the only advantage CompuPro 10 has over networked personal computers.

The CompuPro 10's multi-user operating system allows you to run both 8- and 16-bit software at the same time. So you can choose from a library of over 3,000 programs, as well as use your existing CP/M® software. And our innovative multi-processor design lets you work faster without the performance degradation associated with personal networks.

For a complete demonstration, visit one of our **Full Service CompuPro System Centers.** Or call **(415) 786-0909,** ext. 206 for the System Center nearest you.

Don't get personal, get CompuPro.

CompuPro

3506 Breakwater Court, Hayward, CA 94545

*Suggested list price for four popular personal computers, 40 Mb of hard disk storage and network package. **Includes CompuPro 10 PLUS with 1 Mb RAM, 40 Mb hard disk and applications programs ($7995 list), plus four terminals. CP/M is a registered trademark of Digital Research, Inc. 1984 CompuPro

Floppy-disk drives are not as well protected. They can generally be divided into two types: those with DC motors and those with AC motors. Those with DC motors are de-energized when not reading or writing to disk, but they have heads that are in continual contact with the disk. Drives with AC motors contain read/write heads that are lowered into position only during data transfer. As long as the filter capacitors are large enough to sustain voltage above TTL (transistor-transistor logic) minimum levels, you will not lose data. However, if the head is traveling across the disk, a sudden power loss—below 117 V—can result in a scratched floppy disk.

Winchester drives are an exception. Their heads require a nominal 15 seconds to be lifted to the normal operating position and a comparable time to be de-energized. It appears, therefore, that a 25-ms loss of power should have no detrimental effect. Some 5¼-inch Winchesters do have an electromechanical brake that activates at approximately 9 V, making it difficult to predict what will happen to them at different levels of power loss.

UPS Shopping Questions

Here are some appropriate questions to ask when shopping for a UPS device. Questions 2 through 9 are particularly applicable to standby UPS units.

1. Should I purchase a continuous-duty or a standby UPS? (A quality standby UPS may perform acceptably at a considerable savings.)
2. What is the power rating of the UPS? If it has a built-in battery, how long will the battery supply power at a usable voltage level? Will the vendor supply an output-voltage versus time curve for its UPS unit under rated power conditions?
3. You may wish to purchase a UPS with reserve power to accommodate future computer components. How much 117-V rms output voltage variation will occur if the unit is not used at its rated load power? That is, how well is the output voltage regulated? Will the vendor supply an output-voltage versus percent-of-rated-load power curve for its UPS? (This question is appropriate because the intermittent operation of disk drives and printers causes variations in the load current that must be supplied by the UPS.)
4. Are terminals available on the case of the UPS whereby an external battery may be employed (thus enabling a longer operating period)? If so, what voltage must the external battery be? (Twelve volts is desirable, so a low-cost car battery may be used.)
5. Will overheating problems occur if operated with an external battery for an extended period? How long can you operate?
6. Is the UPS unit available without the internal battery? (You may decide to use a 12-V car battery.)
7. To what voltage must the power line decrease before the UPS activates? Does the UPS activate at the same voltage value for slowly as well as rapidly decaying line voltages? Does it employ a phase-locked loop circuit with gradual line frequency capture circuitry?
8. In the event of a sudden and complete loss of power, what is the switching time for the standby unit to "cut in"?
9. Is delay circuitry included in this product? (Delay circuitry can keep the unit on line for a period of time after it has been activated by line transients, thus giving the power company's line voltage an opportunity to settle.) If so, what is the delay period?
10. Is the output of the UPS sine wave or square wave? (Some printers malfunction with a square-wave power source. If you're content to save some data and power down your computer, the UPS output waveshape might not be important, and you could purchase a lower-cost unit. A sine-wave unit may cost two to three times as much as an equivalent square-wave unit.)
11. Most microcomputer users already have line transient suppressors. Is the UPS available without this built-in circuitry? If not, can you connect an existing multi-outlet power strip with surge-suppression capability to the output of this UPS without excessive voltage drop?
12. Who services the UPS? (Hong Kong is rather inconvenient.)

The Price of Power

The price of uninterruptible power is a purchase factor. A low-power continuous-duty UPS may cost three to four times more than a standby UPS of equivalent rating. Power ratings of UPSs may be as low as 100 watts or up to many kilowatts. Your home computer doesn't need that much protection. These high-kilowatt units are used by banks and hospital operating rooms.

You can determine the UPS power required to protect your system by adding the individual power ratings of each component. You'll find the power ratings for the central processing unit, disk drives, video-display terminal, and printers on each manufacturer's nameplate or in the accompanying data sheets. If you own a totally integrated computer system, you'll find only one power rating. You may want to purchase a UPS with a slightly greater power rating than your system requires. The extra power will enable you to add one or more new components.

Tables 1 and 2 are based upon information supplied by UPS manufacturers. In some instances their data was incomplete and would not help a reader answer the "consumer" questions that accompany this article (see "UPS Shopping Questions" at left).

A common power rating for standby UPSs used in typical home computer systems is 150 to 200 watts. These units operate on their built-in battery, or batteries, for about 20 minutes. This is just enough time to complete important data entry, albeit by flashlight or candlelight, and save your work (see "Constructing an Emergency Light Source" on page 190). ■

THE BRIEFCASE DATA BASE.

CARTRIDGE DATA MANAGEMENT COMES OF AGE.

Today's business microcomputers have generated an information explosion that today's data storage devices—including the highly-touted, high-capacity Winchesters—have been ill-prepared to contain.



With one notable exception. The Bernoulli Box™ from IOMEGA. Available for the IBM PC, XT, most compatibles, the TI Professional, and Apple's Macintosh,™ the Bernoulli Box delivers unparalleled data base dynamics. Thanks to its removable 10-megabyte cartridges (5-megabyte for the Macintosh) and its proprietary removable disk technology.

And that, more and more, is what your business needs today. Not centralized, monolithic banks of information, but data bases defined by job function and software application. Data bases that give people the versatility to work more productively.

But there is more. More performance and reliability. Transfer rates and access times faster than most Winchesters. No head crashes ever. And cost per megabyte that Winchesters cannot touch.

The Bernoulli Box's cartridge capacity, portability, and absolute interchangeability give your business more options. You can easily build primary data bases. You can package individualized data bases, software and all—for payroll, accounting, marketing—in convenient, dedicated cartridges. You can secure them quickly and economically in backup. And you can pack all of the data into a briefcase, an interoffice envelope, or even a file drawer.

For the dealer nearest you, call 1-800-556-1234 ext. 215. In California call 1-800-441-2345 ext. 215.

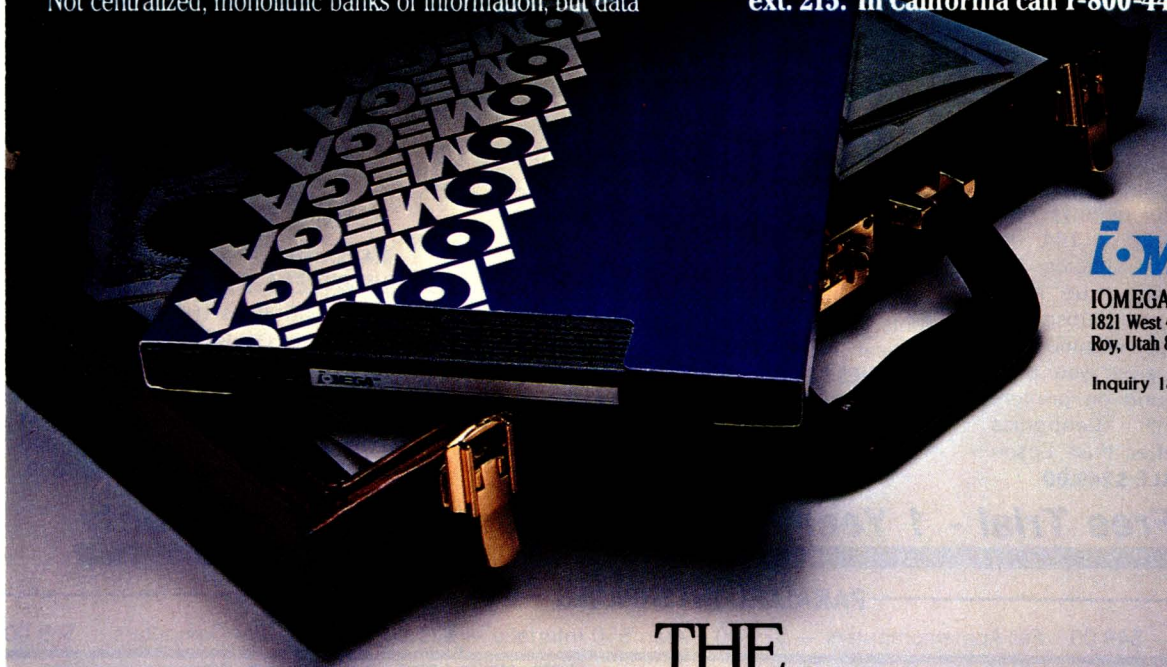

IOMEGA™

IOMEGA Corporation
1821 West 4000 South
Roy, Utah 84067

Inquiry 182

THE BERNOULLI BOX™

FANTASTIC COMPUTER PRINTER SALE!!!

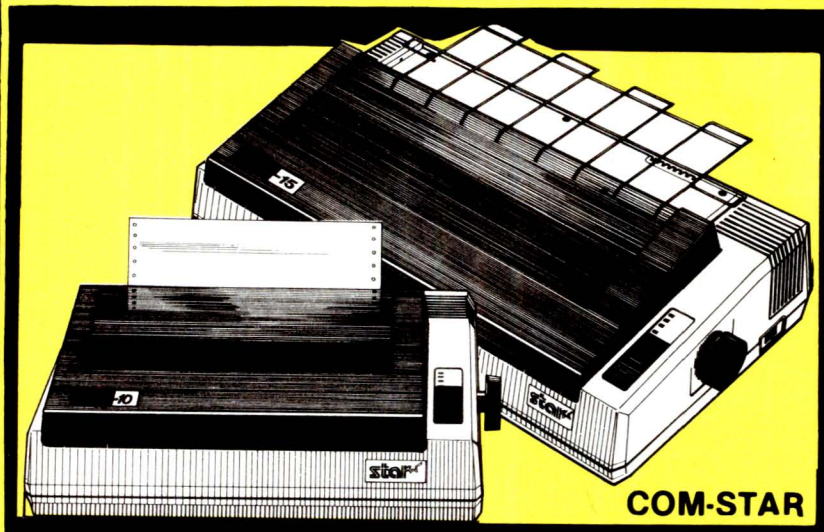

COM-STAR T/F

Tractor
Friction
Printer

only $ 169**

- Lowest Priced, Best Quality, Tractor-Friction Printers in the U.S.A.
- Fast 80-120-160 Characters Per Second • 40, 46, 66, 80, 96, 132 Characters Per Line Spacing
- Word Processing • Print Labels, Letters, Graphs and Tables • List Your Programs
- Print Out Data from Modem Services • "The Most Important Accessory for Your Computer"

** DELUXE COMSTAR T/F 80 CPS Printer — $169.00

This COMSTAR T/F (Tractor Friction) PRINTER is exceptionally versatile. It prints 8½" x 11" standard size single sheet stationary or continuous feed computer paper. Bi-directional, impact dot matrix, 80 CPS, 224 characters. (Centronics Parellel Interface).

Premium Quality 120-140 CPS 10" COM-STAR PLUS+ Printer $249.00

The COM-STAR PLUS+ gives you all the features of the COMSTAR T/F PRINTER plus a 10" carriage, 120-140 CPS, 9 x 9 dot matrix with double strike capability for 18 x 18 dot matrix (near letter quality), high resolution bit image (120 x 144 dot matrix), underlining, back spacing, left and right margin settings, true lower decenders with super and subscripts, prints standard, italic, block graphics and special characters. It gives you print quality and features found on printers costing twice as much!! (Centronics Parallel Interface) (Better than Epson FX80). List $499.00 **SALE $249.00**

Premium Quality 120-140 CPS 15½" COM-STAR PLUS+ Business Printer $349.00

Has all the features of the 10" COM-STAR PLUS+ PRINTER plus 15½" carriage and more powerful electronics components to handle large ledger business forms! (Better than Epson FX 100). List $599

SALE $349.00

Superior Quality 10" COM-STAR+ H.S. HIGH SPEED 160-180 CPS Business Printer $369.00

This **Super High Speed Com-Star+ Business Printer** has all the features of the 10" COM-STAR+ PRINTER with HIGH SPEED BUSINESS PRINTING 160-180 CPS, 100% duty cycle, 8K Buffer, diverse character fonts, special symbols and true decenders, vertical and horizontal tabs. **A RED HOT BUSINESS PRINTER** at an unbelievable low price (Serial or Centronics Parallel Interface) List $699.00 **Sale $369.00.**

Superior Quality 15½" COM-STAR PLUS+ H.S. High Speed 160 - 180 CPS Business Printer $469.00

This **Super High Speed COM-STAR+ 15½" Business Printer** has all the features of the 10" COM-STAR BUSINESS PRINTER witha 15½" Carriage and more powerful electronic components to handle larger ledger business forms! Exclusive bottom feed. (Serial Centronics Parallel Interface) List $799.00 **Sale $469.00**

Olympia

Executive Letter Quality DAISY WHEEL PRINTER $379.00

This is the worlds finest daisy wheel printer **Fantastic Letter Quality,** up to 20 CPS bidirectional, will handle 14.4" forms width! Has a 256 character print buffer, special print enhancements, built in tractor-feed (Centronics Parallel and RS232C Interface) List $699 **SALE $379.**

• 15 Day Free Trial - 1 Year Immediate Replacement Warranty

PARALLEL INTERFACES

For VIC-20 and COM-64 — $49.00 For Apple computers — $79.00 Atari 850 Interface — $79.00 For ALL IBM Computers — $89.00

Add $14.50 for shipping, handling and insurance. Illinois residents please add 6% tax. Add $29.00 for CANADA, PUERTO RICO, HAWAII, ALASKA, APO-FPO orders. Canadian orders must be in U.S. dollars. WE DO NOT EXPORT TO OTHER COUNTRIES.

Enclose Cashiers Check, Money Order or Personal Check. Allow 14 days for delivery. 2 to 7 days for phone orders, 1 day express mail!

VISA—MASTER CARD—We Ship C.O.D. to U.S. Addresses Only

PROTECTO ENTERPRIZES (WE LOVE OUR CUSTOMERS)

BOX 550, BARRINGTON, ILLINOIS 60010
Phone 312/382-5244 to order

COM-STAR PLUS+ Print Example:

ABCDEFGHIJKLMNOPQRSTUVWXYZ
ABCDEFGHIJKLMNOPQRSTUVWXYZ 1234567890

NEW 128K —MEGA BYTE DUAL DISK DRIVE—80 COLUMN

COMPUTER SYSTEM SALE!

HOME • BUSINESS • WORD PROCESSING

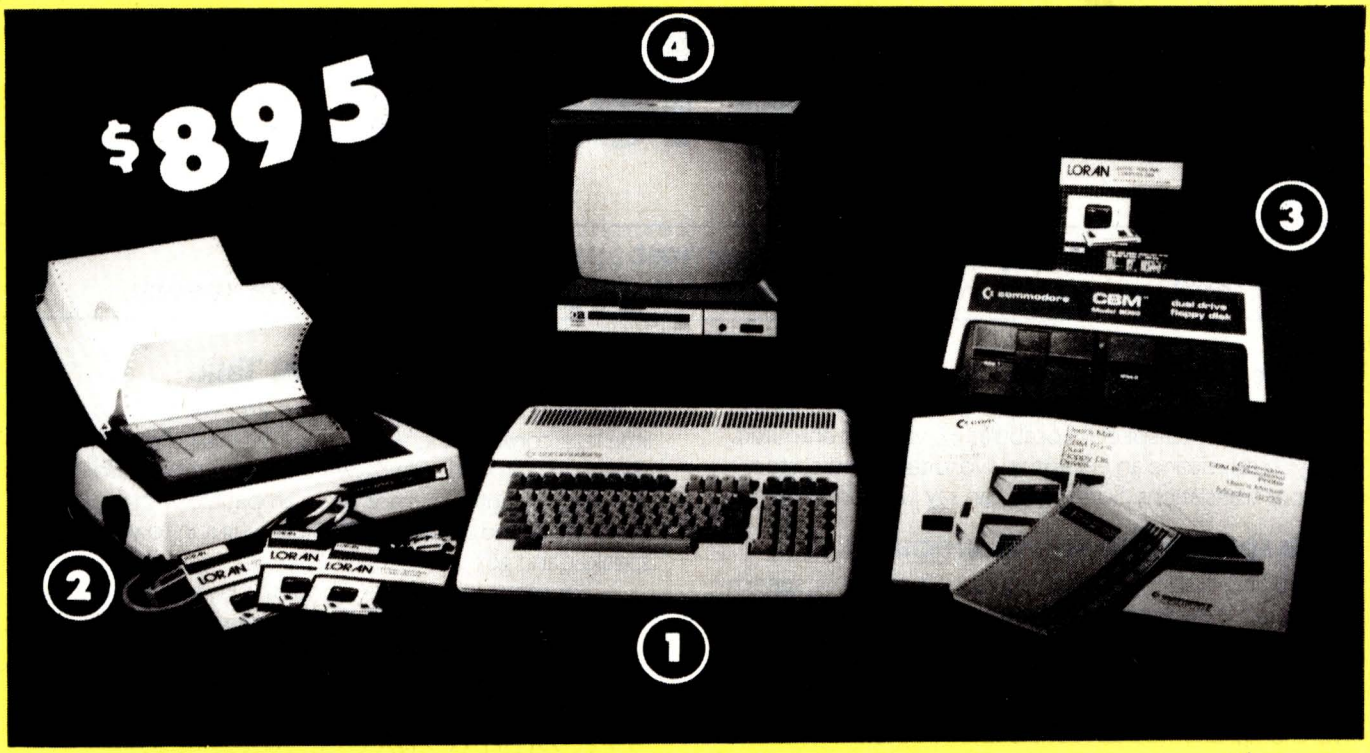

LOOK AT ALL YOU GET FOR ONLY **$895.**

	LIST PRICE
① B128 COMMODORE 128K 80 COLUMN COMPUTER	$ 995.00
② 4023 - 100 CPS - 80 COLUMN BIDIRECTIONAL PRINTER	499.00
③ 8050 DUAL DISK DRIVE (over 1 million bytes)	1795.00
④ 12" HI RESOLUTION 80 COLUMN MONITOR	249.00
• BOX OF 10 LORAN LIFETIME GUARANTEED DISKS	49.95
• 1100 SHEETS FANFOLD PAPER	19.95
• ALL CABLES NEEDED FOR INTERFACING	102.05
TOTAL LIST PRICE	**$3717.95**

$895 SALE PRICE

PLUS YOU CAN ORDER THESE BUSINESS PROGRAMS AT SALE PRICES

	LIST	SALE		LIST	SALE
Professional 80 Column Word Processor	$149.95	**$99.00**	Payroll	$149.95	**$99.00**
Professional Data Base	$149.95	**$99.00**	Inventory	$149.95	**$99.00**
Accounts Receivable	$149.95	**$99.00**	General Ledger	$149.95	**$99.00**
Accounts Payable	$149.95	**$99.00**	Financial Spread Sheet	$149.95	**$99.00**
			Order Entry	$149.95	**$99.00**

PRINTER REPLACEMENT OPTIONS

(replace the 4023 with the following at these sale prices)

	LIST	SALE
☆ Olympia Executive Letter Quality Printer	$699.00	**$379.00**
☆ Comstar Hi-Speed 160 CPS 15½" Business Printer	$779.00	**$469.00**
☆ Telecommunications Deluxe Modem Package	$199.00	**$139.00**
☆ IEEE to Centronics Parallel Printer Interface	$179.00	**$139.00**

15 DAY FREE TRIAL. We give you 15 days to try out this SUPER SYSTEM PACKAGE!! If it doesn't meet your expectations, just send it back to us prepaid and we will refund your purchase price!!
90 DAY IMMEDIATE REPLACEMENT WARRANTY. If any of the SUPER SYSTEM PACKAGE equipment or programs fail due to faulty workmanship or material we will replace it IMMEDIATELY at no charge!!

Add $50.00 for shipping and handling!!
$100.00 for Alaska and Hawaii orders.
WE DO NOT EXPORT TO OTHER COUNTRIES
Enclose Cashiers Check, Money Order or Personal Check. Allow 14 days for delivery. 2 to 7 days for phone orders, 1 day express mail! We accept Visa and MasterCard. We ship C.O.D. to continental U.S. addresses only.

PROTECTO
ENTERPRIZES (WE LOVE OUR CUSTOMERS)
BOX 550, BARRINGTON, ILLINOIS 60010
Phone 312/382-5244 to order

You already own a computer that can talk. Now let it.

Now you can upgrade almost any personal computer and make it more powerful than ever, by giving it the power of speech.

The Votrax Personal Speech System is the least expensive sophisticated voice synthesizer available today. The PSS's text-to-speech vocabulary is virtually unlimited, and you can define an exception word table and customize your translations. So the PSS can say just about anything!

It's a speech and sound specialist.

The PSS can also mix speech and sound effects or speech and music. It contains its own speaker, a programmable master clock, 256 programmable frequencies, a programmable speech rate for a more natural rhythm, and 16 programmable amplitude levels for incredible control of word emphasis. You can control the volume. Plus, it doesn't use any of your computer's valuable memory.

It's computer friendly.

The PSS is unbelievably easy to use. It doesn't need an interface card for most computers. It comes with standard serial and parallel ports. Speech, music, and sound effects are as simple as printing out a document.

What do you do with a talking computer?

There are countless practical applications. Businesses may want the PSS for spoken transmission of information, narration of displays, and product demonstrations. It makes verification of data input possible for the blind. It can be part of a burglar alarm system. Children can use the PSS as a study aid. And it helps games come alive, speaking while you play.

Whatever your computer can do, the PSS can help it do it better, at a cost that makes it all worthwhile: only $395.* Call (313) 583-9884 to hear an actual voice demonstration of the PSS.

*Suggested retail price

There's also the Type 'N Talk.

If you want a less sophisticated unit and want to spend a little less, consider the Votrax Type 'N Talk (TNT). Its vocabulary is also limited only by what you can type. It doesn't use any computer memory, it's compatible with most computers, and it's only $249.* Just plug it in to your own speaker and go!

For more information about the Personal Speech System or the Type 'N Talk, see your local computer retailer, call toll-free or write:

votrax®

1394 Rankin
Troy, Michigan 48083
1-800-521-1350
(In Michigan, call collect
313-588-0341)

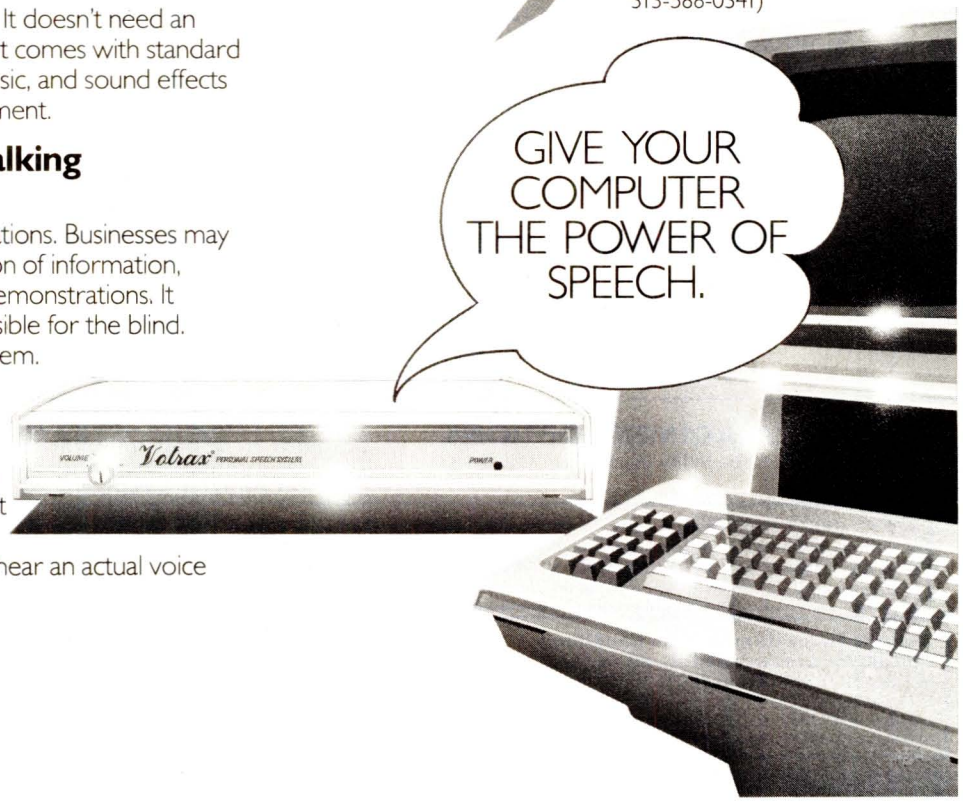

Inquiry 366

BY RICHARD S. SHUFORD

AN INTRODUCTION TO FIBER OPTICS

PART 2: CONNECTIONS AND NETWORKS

Optical fibers are becoming practical for use in applications such as local networks

Editor's note: Last month we looked at the new technology of optical-fiber waveguides and examined their fundamental principles. This month we'll concentrate on the more practical aspects of fiber optics: how they are connected together and how they are being used in computer communications.

The rapid development and change of the fiber-optics industry is evident in microcosm in the little parts that enable the major components of a fiber-optic system to be fitted together: the connectors. Established electronic-connector companies are in hot competition with unknown upstarts to develop, patent, and sell the fiber-optic cable connector that will become the equivalent of the audio-equipment "phono" plug or the coaxial-cable PL-259. The SMA 905 and 906 connectors for multimode fibers, made by Amphenol, AMP, Optical Fiber Technologies Inc., and a few others, are candidates (at least in commercial systems), but their role is not yet a dominant one.

To the user of a fiber-optic system, the continued competition indicates that none of the connectors hitherto available have been really satisfactory in all respects. Among their defects have been high price, fragility, high loss, noninterchangeability, difficulty of installation, and uncertainty of supply. Fortunately, the majority of the products on the market have overcome most of these flaws, but the connectors all seem to have at least one drawback.

Most of the connector designs now in wide use require a good deal of expertise as well as special polishing or test equipment for proper installation. Many of the ones with low loss must be assembled using an epoxy adhesive to hold the optical fiber in alignment; the epoxies often require exposure to an ultraviolet curing light or high temperatures. Furthermore if, once the epoxy has cured, the fiber alignment is unsatisfactory, the connector has to be cut off and discarded.

Engineers laying out a fiber-optic communication link have to pay close attention to the total signal loss in the system. Transmitter and receiver gain are weighed against the losses caused by each passive system component; the balance sheet of gain and loss is called the *flux* or *power budget*. In systems that have many connections between the transmitter and receiver, as is often the case in a computer local network, the connectors usually introduce more loss than any other factor. There is also a trade-off between the quality of the connection produced and the ease of installing the connector: the easiest to install are the most lossy. With really tight power budgets, installers have to resort to the difficult but effective *fusion splice* for joining fibers, in which the cloven, stripped fiber end faces are precisely aligned and then melted together by subjecting them to an electric arc.

But new kinds of connectors and splices are being invented, and one of them may yet combine the virtues everyone is waiting for. For example, promising developments have appeared in the multimode *expanded-beam lens* (EBL) connectors. The lens in an

(continued)

Richard S. Shuford is BYTE*'s special-projects editor. He can be contacted at* POB 372, *Hancock,* NH 03449.

EBL connector spreads the light emerging from the attached fiber into a larger exit angle or, on the other side of the connection, gathers light from a larger region of space than would normally be permitted by the fiber's numerical aperture. Compared to other connectors, EBL connectors reduce the precision of fiber alignment required, but they tend to be expensive simply because they incorporate lenses, which have to be ground and then coated chemically to prevent power loss from extra reflection. However, at least one simplification has been made possible by new EBL designs now available from General Telephone and Electronics and from the Deutsch (pronounced "doysh") Corporation; these can be in-

(continued)

DRIVING THE FIBER-OPTIC ETHERNET BUS

The Ethernet was designed to use a network-access protocol called carrier-sense, multiple-access with collision detection (CSMA/CD). The inspiration for this, according to inventor Robert Metcalf, was the so-called "cocktail party algorithm": a man at a party wishes to speak, but first he listens, finding out if anyone else is already speaking. If he hears silence, he begins to talk. But if the woman next to him begins to speak at the same instant, neither will be understood by their listeners. So, each hearing the other, they both stop. After waiting for a brief moment, the man tries again to speak, and if the woman is inclined to wait for a slightly longer interval, the man succeeds in communicating.

A CSMA/CD computer network works essentially the same way. The transceivers at each node sense the state of the transmission medium (usually a coaxial cable) before attempting to transmit, looking for a carrier signal from another station's transceiver. Sometimes two devices attempt to transmit at once, but when this *collision* is detected, both stop and pause for a random interval before trying again. The likelihood of a collision is increased by delays of propagation along the length of the cable: by the time the signal from one station has traveled down the cable, another station has already started its own transmission, having heard nothing.

In Ethernet, a station can easily tell that a collision has occurred by sensing the DC voltage level on the coaxial cable, which becomes higher than usual when two stations are transmitting simultaneously. But a network in which signals travel through glass in the form of light waves cannot use DC voltages to detect collisions. Nor can it use comparison of the levels of light present in the optical fiber. Different levels of light arrive at various points in the system because of the attenuation of the light at each connection. Furthermore, the power emitted by optical transmitters varies—some emit twice as much light as others, and the sensitivity of receivers also varies. There is no practical way to use direct measurement of the transmitted signal as a reliable collision detector. A team of researchers headed by Richard P. Kelly at Siecor FiberLAN took this as a challenge in designing a fiber-optic network that would be compatible with Ethernet.

The researchers looked at some previous efforts to use an active central controller with a hybrid signal path (including work at Xerox's Palo Alto Research Center, where Ethernet was developed). In many such previous designs, transmissions coming over optical fibers from each network station were fed into an optical transceiver at the central node. The transceiver converted the signal into electrical form and then placed it on a metallic electrical bus, permitting collision detection to occur the same way as in the original Ethernet. The signal was then reconverted into modulated light and sent out on a second set of fibers to the other nodes.

But an active central node for propagating the signals negates one of the basic reasons for using the bus topology: the network could fail totally if anything goes wrong with the active central controller. (The same principle applies if active T-taps are used on a pure fiber-optic bus, although possibly only part of the network would fail.) So Kelly's team devised a clever alternative in which the physical bus of Ethernet is emulated by a passive optical multiplexer, the transmissive star coupler. For each network node, separate transmit and receive fibers (in a dual cable) are used, physically laid out in a star configuration and converging at a wiring center. The transmit lines enter the input side of the transmissive coupler, which divides the incoming light equally and broadcasts it to all the stations on the network over the receive lines (as shown in figure 4). Any collisions of transmissions occur inside the coupler.

However, at some point in the transmit line coming from the remote stations, an optical tap diverts a small amount of the optical power (around 10 percent) to separate fibers that feed a separate active collision detector. The collision detector has individual inputs for each network station, each feeding a receiver connected to one gate of a logical comparator. Whenever signals arrive simultaneously on more than one collision-detection line, a collision is known to be occurring. With multiple inputs active, the comparator emits an output signal to activate a "jam" transmitter that feeds the central coupler with a distinctive signal subsequently broadcast to all nodes. To find out if there has been a collision, the network nodes merely have to detect the special jam signal. If there is a failure in the collision detector, the network falls back into a somewhat less efficient mode of operation, without collision detection; data, however, can still flow throughout the system.

In this design, the passive transmissive coupler maintains the robustness of the bus topology, while the active collision detector allows complete interconnection and protocol compatibility with existing coaxial-cable Ethernet installations. And the efficiency of optical-fiber transmissions results in longer network segments, increasing from 500 meters to 2800 the distances that can be handled between nodes before repeaters are needed.

Inquiry 286 ⟶

Top Modem



• Hayes Compatible • More Features • Only $495

The best price/performance ratio of any 212A modem on the market today for under $500! That puts ProModem 1200 on top of the stack. Compare the 26 features. You'll see why. Only ProModem offers all 26. 15 are exclusive.

They're important features. The Real Time Clock/Calendar for example. Used with Applications Programs, or the OPTIONS PROCESSOR, gives you pre-set timed operation of the modem. Also, time and duration records of all calls. The convenient HELP command makes ProModem easy to use. It promptly displays the Instructions Menu whenever there's a question about what to do next. With Call Progress Detection, you can "tell" ProModem to do things like automatically "Redial When Busy."

It's the only modem that lets you expand into a full telecommunications center with add-ons. The OPTIONS PROCESSOR gives you Data Store and Time Base Continuity with battery backup, Personal/Business Telephone Directory, and Automatic Receipt/Transfer Buffer, expandable to 64K. The OPTIONS PROCESSOR also enables ProModem to operate unattended, with or without your computer.

The optional 12-character ALPHANUMERIC DISPLAY indicates modem operating status, system diagnostics, message status, phone numbers, and real time clock data. . . to name just a few.

Together, these standard and optional features give you a sophisticated electronic mail and communications capability unmatched by any other modem in this class. And, there's more. See your local dealer for additional information and a demonstration. He'll show you why ProModem 1200 is tops.

ProModem 1200 from...

PROMETHEUS®

Prometheus Products, Inc., 45277 Fremont Blvd., Fremont CA 94538, (415) 490-2370

NOW AVAILABLE
- ProModem plug-in cards for IBM PC and Apple II
- ProCom Software

212A Modem Comparison Chart *

STANDARD FEATURES	PRO	HAYES STACK	NOVATION SMARTCAT+	ANCHOR 1200	US ROBOTICS PASSWORD
300/1200 Baud (212A)	✓	✓	✓	✓	✓
Intelligent Microprocessor	✓	✓	✓	✓	✓
Tone and Pulse Dialing	✓	✓	✓	✓	✓
Hayes Command Compatible (Works with Smartcom™)	✓	✓	✓	✓	
Additional telephone jack with exclusion switching	✓				
Analog loop back self test	✓	✓	✓		
Self Test at Power Up	✓		✓		
Call Progress Detection (Busy, Dial Tones, Trunk Busy, etc.)	✓		✓		
Speaker and External Volume Control	✓	✓	✓		
Full Complement of Status Lights	✓	✓			
8 Switch Selectable power-up defaults	✓	✓			
Adaptive Dialing	✓				
Auto Redial on Busy	✓				
Ergonomically designed easy to read front display panel	✓				
Internal Stand-Alone Power Supply	✓				
Built in Real Time Clock/Calendar	✓				
Help Command	✓				
300 baud connect while maintaining 1200 baud RS-232 link	✓				

EXPANDABLE OPTIONS	
Automatic Receiver Buffer	✓
Automatic Transmit Buffer	✓
On-board Personal/Business Directory	✓
Buffer, Expandable to 64K	✓
Auto Logon Macros	✓
Auto message transmission to groups of numbers	✓
Records call duration	✓
12-character Alphanumeric Display	✓

*Comparison made by Prometheus on the basis of the best information available to Prometheus at time of printing.

Introducing Dow Jones Straight Talk™

Now there's smart software™ for the Macintosh.

Think of it. Now there's software as smart as the Apple® Macintosh™ computer. Dow Jones Straight Talk™ offers you all the facts in Dow Jones News/Retrieval® and the other leading information services. With Straight Talk, you get the exact information you need when you need it.

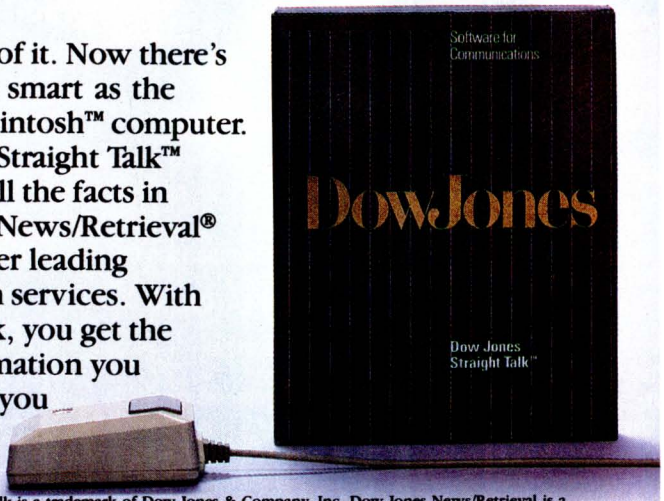

Dow Jones Straight Talk is a trademark of Dow Jones & Company, Inc. Dow Jones News/Retrieval is a registered trademark of Dow Jones & Company, Inc. Smart software is a trademark of Dow Jones & Company, Inc. The Information Game is a trademark of Dow Jones & Company, Inc. Apple is a registered trademark of Apple Computer, Inc. Macintosh is a trademark licensed to Apple Computer, Inc. Copyright © 1984 Dow Jones & Company, Inc. All Rights Reserved.

Get an "A" on your Paper.

It's one o'clock in the morning. Your term paper on the American Revolution is due at 8 a.m. Where was the misnamed Battle of Bunker Hill *really* fought? It could be the difference between an "A" and a "B".

Now there's smart software™ for the Macintosh™ computer.

With Straight Talk, the smart software from Dow Jones, you can use an electronic encyclopedia to find the historical fact you need. Even if it's the fact that on June 17, 1776 the Battle of Bunker Hill was fought on Breed's Hill.

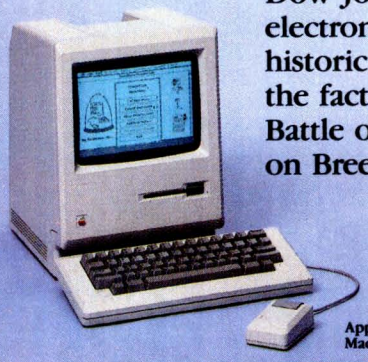

Dow Jones Straight Talk™

Apple is a registered trademark of Apple Computer, Inc. Macintosh is a trademark licensed to Apple Computer, Inc.

stalled on multimode cables without special polishing of the fiber's face.

INTERCOMPUTER COMMUNICATION

Optical fibers are becoming an increasingly attractive medium for communication between computers. Organizations with large data-processing chores are discovering the efficiency and security of fiber optics for connecting computation centers that are a few miles apart. The small physical size of fiber-optic cables is no small advantage in upgrading an installation where cable ducts are already crowded. And fiber-optic links are beginning to appear where engineers planning for greater capacity recognize the potential for expanding the bandwidth by merely upgrading the interface equipment.

A significant new area of use is in the so-called "back-end" networks, connecting large-scale, high-speed processors to their attendant memory and peripheral devices. One of the projects of technical subcommittee X3T9.5 of the American National Standards Institute (ANSI) is the Fiber Distributed Data Interface, a back-end interface designed to use fiber-optic links at data rates of 100 megabits per second (Mbps).

But the application of most interest to users of personal computers is the lower-speed general-purpose local-area network (LAN), which connects workstations, file servers, and miscellaneous peripherals in an office or factory environment. Any local network that needs wide bandwidth, long cable runs between stations, immunity to electromagnetic interference, or high security is a candidate for fiber-optic cabling. And although an optical-fiber-based system costs initially somewhat more than an equivalent network built from copper twisted-pair wire or coaxial cable, the bandwidth of a fiber-optic system can be easily expanded later by merely changing the interface equipment.

LOCAL NETWORKS

If you've been following the recent commercial developments in local

Inquiry 118

networks, you know that battles are being waged over what is the best general-purpose network-node connection and layout scheme, or *topology*. The three major systems are the bus, the ring (or loop), and the star. The champions are well known: Xerox and Digital Equipment Corporation attacking on behalf of the bus, IBM stoutly defending the ring, and AT&T recently launching a kind of *Star Wars* offensive.

The inherent characteristics of fiber-optic technology cause its most natural network implementations to take the form of the ring or star. But currently, bus-type networks seem to have the best strategic position in the topology skirmishes, largely because of the success of the Xerox-developed Ethernet and its imitators. This poses somewhat of an obstacle to the use of fiber optics in many currently existing local networks; however, it is not an insurmountable one.

In figure 1, the bus, ring, and star topologies are shown in their idealized forms. A bus network has all its nodes connected directly to a single distribution medium; a signal broadcast by any node can be received by every other node. In a ring network, each node communicates directly only with the nodes immediately adjacent to it (in the logical sense), receiving on one side and transmitting on the other. Provisions are usually made to bypass a malfunctioning node. The star network features a central switching point that receives transmissions from the originating nodes and redirects or retransmits the data to the destination nodes; each node talks only to the central switch.

(Another distinction can be drawn between different kinds of networks. If the signals are transmitted in more or less raw form, the network is called *baseband*. If the data signals are modulated onto a very-high-frequency carrier signal, the network is called *broadband*. A broadband system can mix the computer data with other kinds of signals: telephone conversations, video images, etc. But the interface equipment for broadband is

(continued)

Get that Big Promotion.

In half an hour, your boss is due to finalize a merger with a company you have doubts about. His career rides on this deal. How can you change his mind before it's too late?

Now there's smart software™ for the Macintosh™ computer.

With Straight Talk, the smart software from Dow Jones, you can get the lowdown on a company without ever leaving your office. You might even discover a revealing fact that saves your boss's job and earns you a new one.



Dow Jones Straight Talk™

Apple is a registered trademark of Apple Computer, Inc. Macintosh is a trademark licensed to Apple Computer, Inc.

Be Smart.

See Straight Talk at your Macintosh™ computer dealer or call: 1-800-345-8500 ext. 272 for further information.



Dow Jones Straight Talk™

(Alaska, Hawaii and foreign call: 1-215-789-7008 ext. 272)

somewhat more complex.)

In addition to the physical connections between nodes, a network must have a traffic cop: some means of deciding what data from which nodes can be passed over the system. Several schemes for enabling the system to make this decision exist, each with good and bad points. The topology selected for a network will be a chief factor in deciding which network-access protocol is appropriate.

Both IBM and AT&T have announced support for fiber-optic links as part of a computer local network. At the time of this writing (November), IBM's commitment is limited to specifying an option in the IBM Cabling System for use of fiber-optic cables (in pairs, multimode 140-micron-cladding/100-micron-core type). IBM says it intends to implement a local network with a logical ring topology imposed on a star-shaped physical wiring setup, as in figure 2. Access to the network will be granted by a protocol based on passing a logical "token" around the ring. The centralized wiring closets in the announced cabling system are well suited to use of optical fibers. Some installations will probably be hybrids, with copper twisted-pair wire used for short runs and fiber-optic cables for longer links to distant nodes or between wiring

(continued)



Inquiry 64

MAIL ORDER SERVICE YOU CAN DEPEND ON!

EXPRESS

BUSINESS SOFTWARE

PROFESSIONAL SUPPORT *PLUS* RELIABLE PERSONALIZED SERVICE
AND WE'LL STILL BEAT MOST PRICES IN THIS MAGAZINE!

TURBO PASCAL(C.P.) $40	WORDSTAR PROPAK $248	SYMPHONY $419	OPEN ACCESS $349	WORD PERFECT $265
SUPERCALC 3 $199	**WORDSTAR $195**	**MULTIMATE $259**	**CROSSTALK $98**	**LOTUS 1-2-3 $299**

Aid			**Digital Marketing**			**IUS**			**Microrim**			**Perfect Software**		
Typequick	85	85	Writers Pak	295	199	Easy System II	395	184	R Base 4000	495	299	Perfect Writer	349	218
Alpha Software			Footnote	99	84	General Ledger	595	319	Extended Report Writer	150	119	Perfect Writer/ Speller	399	298
Data Base Manager II	295	179	Datebook II	295	179	Accounts Payable	595	319	Clout	249	179	**Peter Norton**		
Anderson-Bell			Notebook	150	98	**Lexisoft**			**Microsoft**			Norton Utilities	80	52
Abstat	395	267	Proofreader	50	38	Spellbinder	495	239	Multiplan	250	139	**Prentice-Hall**		
Ashton-Tate			Grammatik	75	65	**Lifetree**			Basic Interpreter	350	249	Execuvision	395	299
All Products		CALL	**Enertronics**			Volkswriter Deluxe	295	158	Word/Mouse	475	319	**Rosesoft**		
ATI			Energraphics w. Plot. Opt.	450	297	**Living Video Text Inc.**			Chart (Mac)	125	99	Prokey	130	78
Training WordStar	75	45	**Fox & Geller**			Think Tank (IBM)	195	149	Cash Plan (IBM)	150	50	**Select Information Systems**		
Training dBase II	75	45	dGraph or Quickcode	295	159	Think Tank (Apple)	150	109	**Monogram**			Select Word Processor	295	199
Borland International			dUtil	99	58	**MDBS**			Dollars and Sense (IBM)	179	149	**Software Products International**		
Toolbox	49	40	**Fox Research**			Knowledgeman	500	299	Dollars and Sense (Mac)	149	119	Open Access	695	349
Sidekick (C.P.)	49	40	10 Base	495	399	**MECA**			**Oasis**			**Sorcim**		
Continental Software			10 Net	695	499	Managing Your Money	199	137	Word Plus	150	105	SuperCalc 2	295	154
Home Accountant Plus	150	99	**Funk**			**Micropro**			Punctuation and Style	150	95	**Tylog**		
CDEX			Sideways	60	45	SpellStar	99	79	**Pacific Data Systems**			dBase Window	249	155
Advanced Lotus 1-2-3	70	45	**Heritage**			CorrectStar	145	99	Money Track	295	219	**Warner Software Inc.**		
Chang Labs			Smart Key II	90	79	MailMerge	99	79	**Peachtree**			The Desk Organizer	295	239
Rags to Riches Ledger	99	79	**Harvard Software**			InfoStar	495	248	Peachtext 5000	425	185	**Woolf Systems**		
Condor			Harvard Project Manager	395	240	ProPak Plus	695	395	Calendar Mgmt.	195	165	Move It	150	85
Condor 3	650	249							Decision Manager	625	495			
									Business Graphics System	295	219			
									Peachpak 4	395	199			

CALL FOR OUR FREE CATALOG

THIS IS JUST A SAMPLE OF OUR HUGE INVENTORY AND LOW, LOW PRICES, SO PLEASE CALL FOR PRODUCTS NOT LISTED.

To Order Call Toll-Free: (800) 235-3020 (USA) / (800) 235-3021 (CA)
(415) 382-9085

EXPRESS

BUSINESS SOFTWARE

448 Ignacio Blvd., Ste. 332, Novato, CA 94947

FREE UPS SHIPPING ON ORDERS OVER $1000.00

TERMS: Call for shipping charges and support policies • Full guarantee against manufacturers defects • Allow 3 weeks for checks to clear • Prices may change • Call for availability • No cash refunds! Due to our low prices, all sales final.

SAME DAY SHIPMENT ON MOST ORDERS • Prompt UPS service • Authorized purchase order accepted • Dealer, institutional and quantity discounts available • No surcharge for credit card purchases • VISA & Mastercard accepted • COD

closets; any interface needed from metallic to fiber-optic links would be installed in the wiring closet.

AT&T's Information Systems Network (ISN), tied closely to the technology of telephone private branch exchanges, will not use fiber-optic links to individual network stations; conventional four-pair metallic wiring will be run in a star layout from nodes to the central controller or to remote concentrators. However, the linkage from the concentrators to the controller will be over multimode fiber-optic links operating at 8.64 Mbps over distances up to 1 kilometer. The fiber-optic connections serve as extensions of two metallic signal buses inside the central controller, on which packets of data are passed according to a time-division multiple-access protocol before being redirected to their destinations (see figure 3).

Token-ring networks have been popular among Japanese designers, with Hitachi offering its fiber-optic SigmaNet and NEC (Nippon Electric Company) selling its C&C-Net Loop 6770. These systems contain several redundant features to assure continuous service in the event of a partial network failure, including duplicate transmission paths in the ring. Fujitsu Ltd. has exhibited the Optical Data Highway local network, but this ring (or loop) configuration uses time-division multiplexing instead of token passing. And some ring-based networks have appeared in Great Britain, where pioneering work was done on the Cambridge ring system.

(continued)

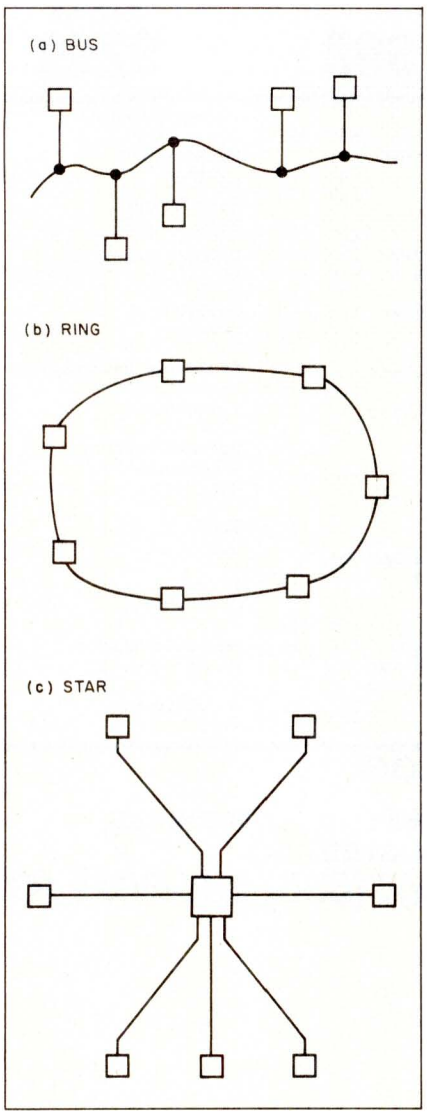

Figure 1: *The bus, ring, and star topologies (or connection configurations) shown in their idealized forms.*

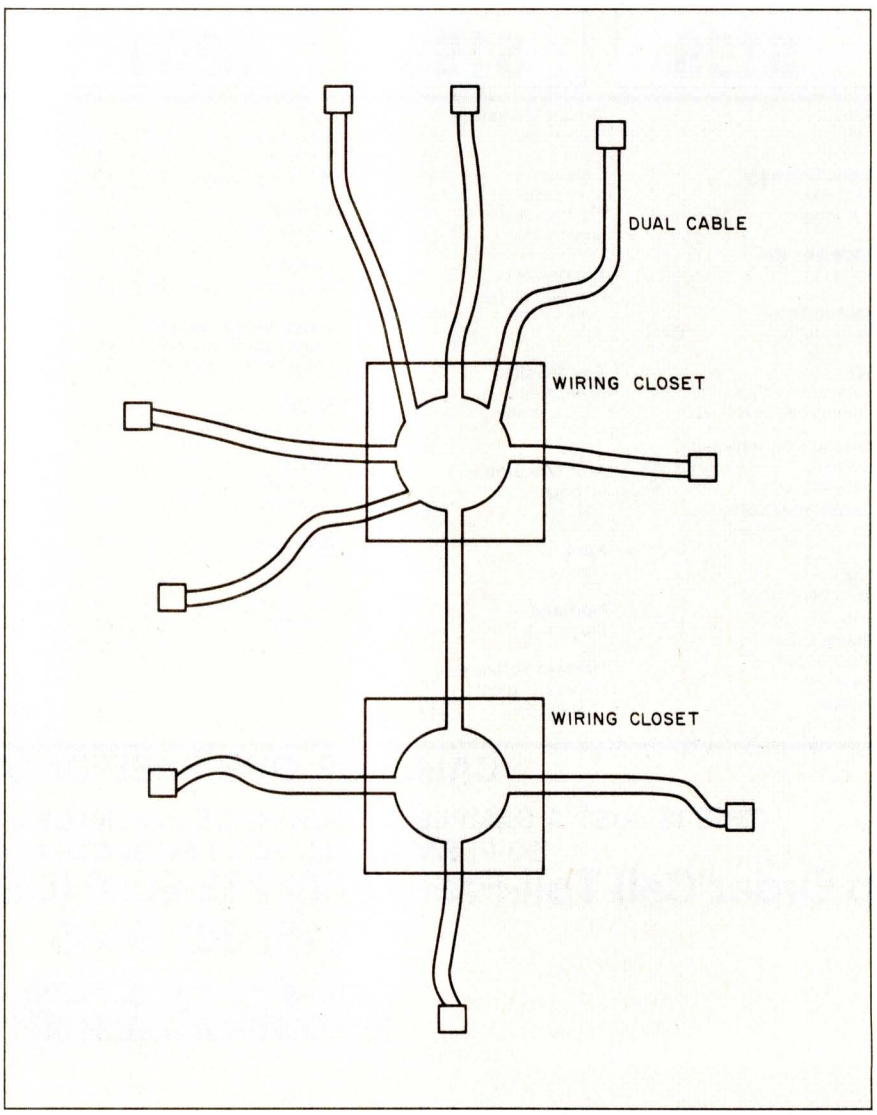

Figure 2: *IBM's predicted local network uses a logical ring topology imposed on a star-shaped physical wiring setup, with a token-passing access protocol. Centralized wiring closets in the cabling system are well suited to use of optical fibers.*

We apologize for our evasiveness. After our last advertisement, many of you felt compelled to contact us regarding the implication that The Shoebox Accountant is completely integrated on a single disk. Although we would like to confirm that a single disk holds general ledger, accounts receivable, accounts payable, and payroll modules, queuing files, and the powerful reporting capabilities for which CYMA Corporation is so well known, and offers the entire program for a mere $395, modesty prevents us from doing so. As ever, we prefer our same, subtle approach.

Nice Box.
Fully Integrated.

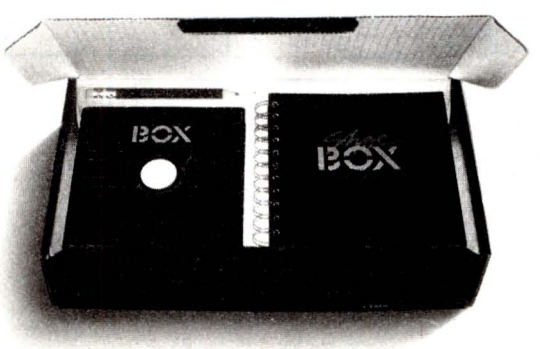

The Shoebox Accountant:™ A complete accounting system for small business. 2160 East Brown Road, Mesa, Arizona 85203. 1-800-292-2962. CYMA McGRAW-HILL

Inquiry 94 for Dealers. Inquiry 95 for End-Users.

The largest players on the bus-topology field are concentrating on developing their metallic systems, but fiber optics has by no means been completely neglected. Attracted by the success of Ethernet, several organizations have experimented with bus networks based on optical fibers. Unfortunately, someone trying to design a fiber-optic version of Ethernet finds that the CSMA/CD (carrier-sense, multiple-access with collision detection) network-access protocol designed for a copper coaxial-cable system does not fit naturally into a system that uses long, thin pieces of glass as the medium of communication. But technical ingenuity has been

(continued)

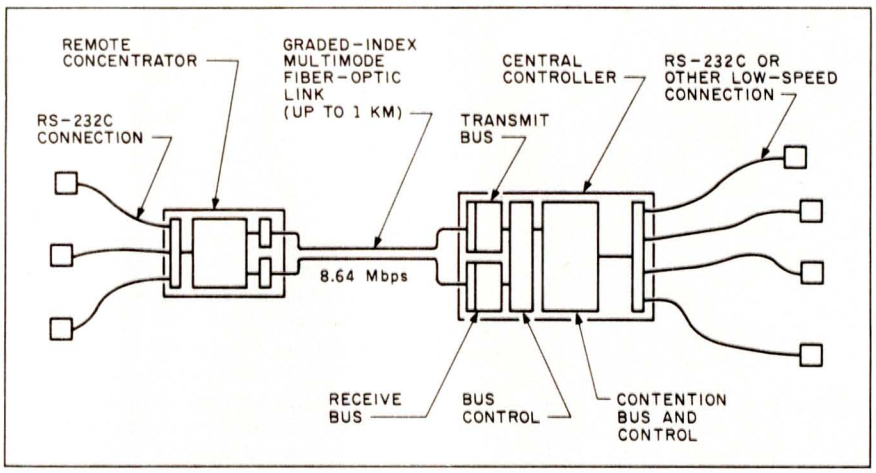

Figure 3: *The fiber-optic connections in AT&T's 8.64-Mbps Information Systems Network serve as extensions of two metallic signal buses inside the central controller.*

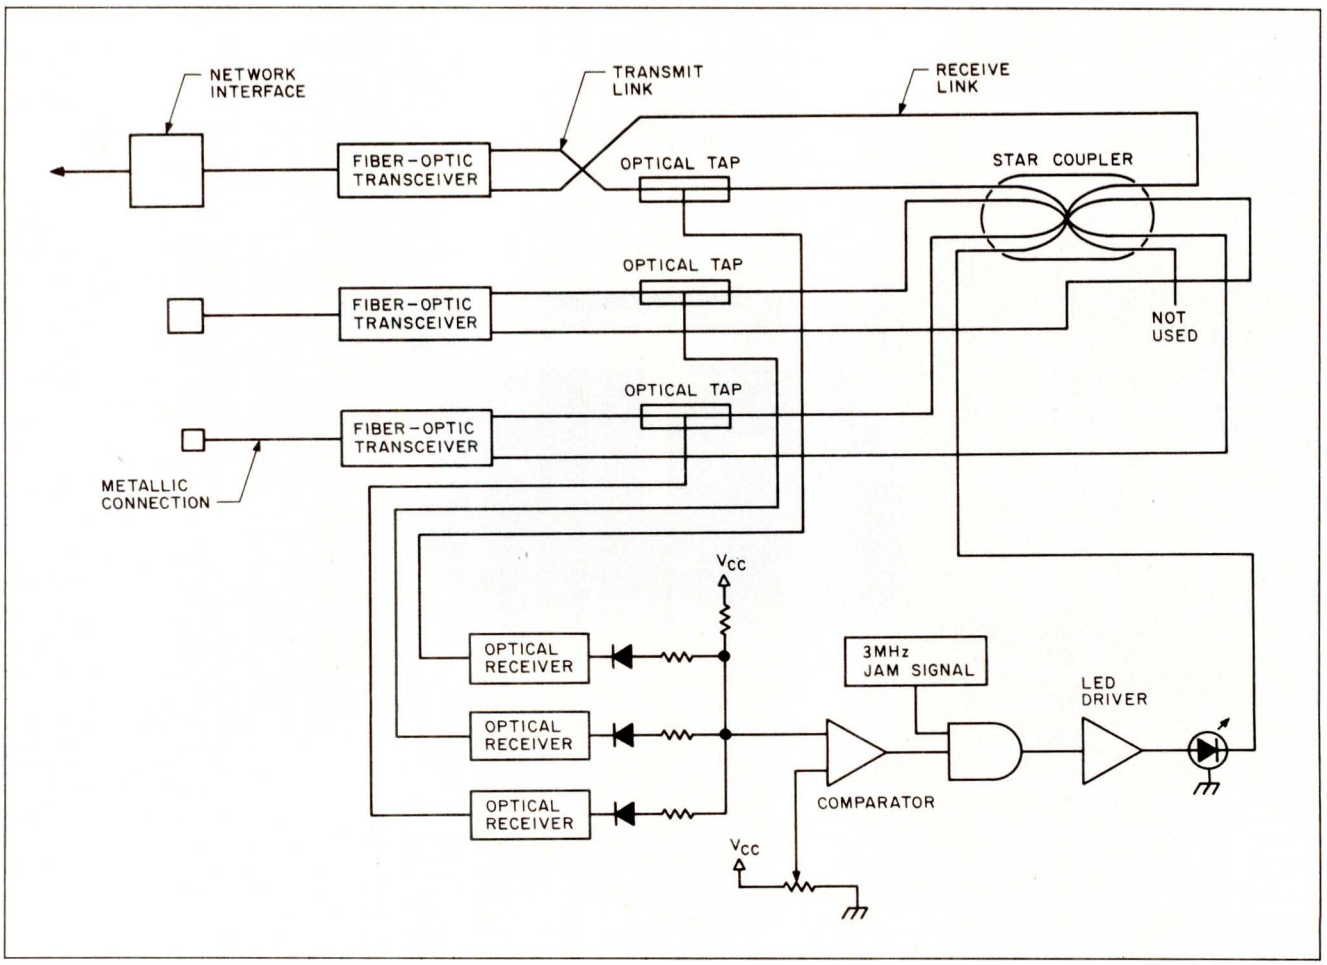

Figure 4: *Ungermann-Bass's Fiber Optic Net/One local network uses Siecor FiberLAN's Net 10 optical transmission system, a cabling setup similar to IBM's in that a star-like formation of cables is used to connect devices on the network with centralized wiring locations. A passive star coupler lets data-bearing light propagate throughout the network for Ethernet compatibility.*

Inquiry 229 ⟶

Champagne Taste Beer Budget



$795 10 MEGA-BYTE HARD DISK SYSTEM

$1095 20 MEGA-BYTE HARD DISK SYSTEM

NOW INCLUDES ASSIST/PAK™ SOFTWARE*

• • THE INSIDER SERIES • •

IS00 • 10 MEGA-BYTE WINCHESTER . . . $795
W/Hard disk controller

IS20 • 20 MEGA-BYTE WINCHESTER . . $1095
W/Hard disk controller

IS40 • 40 MEGA-BYTE WINCHESTER . . $2295
W/Hard disk controller and pwr. supply

IS16 • MICRO-TAPE BACKUP SYSTEM $995
with power supply

XT01 • MICRO-TAPE W/1/2 High Floppy $995

ISPS • POWER SUPPLY $295

ALSO AVAILABLE: SINGLE CARD FLOPPY/HARD DISK CONTROLLER ADD $185.00 TO ABOVE PRICES

ONE YEAR WARRANTY - 30 DAY MONEY BACK GAURANTEE

*Command/Assist™ • Dos manual on Disk - There when you need it!

Cache/Assist™ - A new HARD disk caching program gives more speed - faster disk access time and increased throughput

Micro Design International Inc.; 6566 University Blvd.; Winter Park, FL 32792

Micro Design International Inc. (MDI) is an 8 year old Company Specializing in internal upgrades for IBM PC, XT and PC Compatables. MDI has extensive experience in magnetic media management systems.

FOR ORDERS CALL COLLECT: (305) 677-8333

IBM is a registered trademark of International Business Machine Corporation.
Hard disk drives by Microscience International Inc. We accept VISA/MC

Perfect Compatibility

IBM™ & ACP

Inquiry 25

HARDWARE

COMPUTER SYSTEMS

IBM
PC w/256K 2 DS/DD Disk Drives . . . . . $ Call
PC w/256K 1-360K Drive
1-10MB Hard Disk . . . . . $ Call

COMPAQ
w/256K 2 DS/DD Disk Drives . . . . . $ Call

COMMUNICATION PRODUCTS

HAYES
Smartmodem 300 . . . . . $ 209
Smartmodem 1200 . . . . . $ 489
Smartmodem 1200B w/Smartcom II . . $ 419
Smartmodem-to-IBM 6 ft. Cable . . . . . $ 25
Smartcom II . . . . . $ 99

TAC
Irma (Emulates 3278 Terminal) . . . . . $ Call
Irma Line (For Remote Emulation) . . . $ Call

FLOPPY & HARD DISK DRIVES

CONTROL DATA
Full Size 320K DS/DD . . . . . $ 189
Half-Height 320K DS/DD w/Bracket . . . $ 169

DAVONG
10 MB to 41 MB Hard Disk Int./Ext. . . . $ Call

IOMEGA
Bernoulli Box (10 or 20MB) . . . . . $ Call

TALLGRASS
12—70 MB Hard Disk w/Tape Backup . . $ Call

TEAC
Half-Height 320K DS/DD w/Bracket . . . $ 149
Half-Height 640K DS/DD w/Bracket . . . $ 199

MAYNARD ELECTRONICS
10MB Hard Disk WS-1 (XT Lookalike) . . $ 899
10MB Hard Disk WS-2 (XT Lookalike) . . $1049

EXPANSION BOARDS

MAYNARD ELECTRONICS
Modular Memory Brd. w/64K to 576K . $ 219
Modular Multifunction Board . . . . . $ 95

AST RESEARCH
(All AST boards include SuperDrive, SuperSpool and 1 year warranty)
SixPack Plus w/64K to 384K . . . . . $ 269
MegaPlus II w/64K to 512K . . . . . $ 269
Memory Board II w/64K to 384K . . . . . $ 239
I/O Plus II . . . . . $ 139
MegaPack w/128K or w/256K . . . . . $ Call
Parallel, Serial, Game Options . . . . . $ 35

ORCHID TECHNOLOGY
Blossom w/64K to 384K . . . . . $ 225

TECMAR
Captain w/64K to 384K w/Software . . . $ 269

EXPANSION BOARDS CONT.

QUADRAM
Quadboard w/64K to 384K . . . . . $ 279

PRINTERS & PLOTTERS

C. ITOH
Starwriter Letter Quality 40 cps . . . . . $ 995
Printmaster Letter Quality 55 cps . . . . $ Call
Cut Sheet Feeder (Feeds 200 sheets) . . $ 299

EPSON
(All Printers include GRAPHTRAX-Plus)
RX-80 (120 cps, 80 cols) . . . . . $ Call
RX-80 F/T (120 cps, 80 cols) . . . . . $ Call
RX-100 F/T (100 cps, 132 cols) . . . . . $ Call
FX-80 F/T (160 cps, 80 cols) . . . . . $ Call
FX-100 F/T (160 cps, 132 cols) . . . . . $ Call
Epson-IBM Cable . . . . . $ 30

HEWLETT PACKARD
HP—7470A Two Pen Plotter . . . . . $ Call
HP—7475 Six Pen Plotter . . . . . $ Call
HP-IBM Cable (works w/Lotus 1-2-3) . . $ 50

NEC
NEC 3550 Letter Quality 35 cps . . . . . $ 1499
NEC 2050 Letter Quality 18 cps . . . . . $ 750
Bi-Directional Tractor . . . . . $ 235
Cut Sheet Feeder (Feeds 200 Sheets) . . $ 299
NEC-IBM Cable . . . . . $ 30

OKIDATA
Microline 83A (120 cps, 132 cols) . Best Price
Microline 92 (160 cps, 80 cols) . . . Best Price
Microline 93 (160 cps, 132 cols) . . Best Price
Microline 84 (200 cps, 132 cols) . . Best Price
Plug n' Play . . . . . Best Price
Okidata-IBM Cable . . . . . $ 30

SILVER-REED
EXP 550 (20 cps, 132 cols) . . . . . $ 495

VIDEO—MONITOR BOARDS

HERCULES	Graphics Card . .	$ 349
	Color Card	$ 179
PC COMPONENTS	Bi-Graphix I	$ Call
PARADISE SYSTEMS	Multidisplay	$ 339
PC+ PRODUCTS	Colorplus	$ 419
STB	Graphix Plus . . .	$ 359
QUADRAM	Quadcolor I	$ 199
TECMAR	Graphics Master	$ 499

MONITORS

AMDEK
Video 300 Green Screen . . . . . $ 140
Video 300A Amber Screen . . . . . $ Call
Video 310A IBM Monochrome in Amber . . . . . $ 170

PRINCETON GRAPHICS
HX-12 RGB Hi Resolution Color . . . . . $ 499*
Max-12 IBM Monochrome in Amber . . $ Call
SR-12 Hi Resolution Color . . . . . $ Call

WE'LL GIVE YOU $10.00 Simply refer to this reference number—BY3 with your order and receive $10.00 credit toward your next purchase.*
*Minimum order $100.00. Limit one credit per customer.

applied and workable solutions found.

One successful solution is embodied in the Fiber Optic Net/One network being sold by Ungermann-Bass Inc. The underlying Net 10 optical transmission system, developed for Ungermann-Bass by the FiberLAN Division of Siecor Corporation, uses a cabling setup similar to IBM's in that a star-like formation of cables is used to connect devices on the network with a central wiring point, called the Star Wiring Center (SWC). The SWC offers flexibility in that the individual optical fibers may be interconnected in various ways, but the Ethernet-compatible arrangement requires a passive star coupler that lets the data-bearing light propagate throughout the network (see figure 4). The CSMA/CD access control is assisted by an active collision-detection-determination module. (See the text box "Driving the Fiber-Optic Ethernet Bus" on page 198.) Net/One can serve as a self-sufficient network or be connected through a repeater to an existing metallic Ethernet system.

Other network topologies besides the three just described have been suggested. Canstar Communications Ltd. of Toronto developed a dual-rooted tree topology for its Hubnet. And a group at Hewlett-Packard has proposed a topology called Anarchy, in which nodes are connected by arbitrary bidirectional point-to-point links (some ingenious software has also been proposed to sort out the routing of data traffic). Especially fault-tolerant schemes with multiple propagation paths include the FOREMAN design, which uses a four-way optical Y-coupler on each node, and the Discobus, in which several small star couplers are placed around the network. Perhaps further development will some day bring one of these, or other new ideas, into common acceptance.

POSSIBILITIES FOR THE FUTURE

Most computer local networks that offer use of fiber-optic cables allow some intermixing with conventional copper wiring because the interface

equipment needed for fiber-optic cables is still somewhat more costly for short distances and noncritical links. Net/One, for example, is priced about 20 to 30 percent higher than an equivalent baseband coaxial-cable system (a configuration with 200 ports would cost about $135,000). But the day may soon come when costs are brought down even further, and we may yet see hair-thin threads of glass begin to replace the venerable copper wire.

As the technology of photonics begins to catch up with electronics, integrated electro-optics may begin to provide completely optical amplifiers and logic gates, which would open up whole new realms of applications.

And widespread use of fiber-optic data links could have unexpected side effects. For instance, current computer architectures are developed with the assumption that input/output (I/O) operations will be slower than computation. But if the computer is connected via a wide-bandwidth optical connection, the I/O channel might be able to outrun the processor. If this traditional bottleneck suddenly opens up, we can look for the appearance of new and exciting ideas in building computers. ■

REFERENCES

1. Allan, Roger. "Local Networks: Fiber Optics Gains Momentum." *Electronic Design*, June 23, 1983, page 97.
2. "AT&T Local Network Draws Mixed Reactions." *Data Communications*, August 1984, page 41.
3. Balbus, Peter G., and Joseph L. Healey. "Out of the Labs and Into the Streets." *Datamation*, September 1, 1984, page 96.
4. Bartik, Jean. "IBM's Token Ring: Have the Pieces Finally Come Together?" *Data Communications*, August 1984, page 125.
5. Feldt, Terry. "CLEO Lights Way to Optical ICs." *Electronics*, June 28, 1984, page 102.
6. Kelley, R. P., J. R. Jones, V. J. Bhatt, and P. W. Pate. "Transceiver Design and Implementation Experience in an Ethernet-Compatible Fiber Optic Local Area Network." *Proceedings of Infocom 1984*, Institute of Electrical and Electronics Engineers.
7. Storozum, Steven L., and Roger W. Uhlhorn. "Fault-Tolerant Fiber Optic LANs." *Photonics Spectra*, September 1984, page 61.

Perfect Compatibility
IBM™ & ACP

- No Credit Card Surcharge
- Special Corporate Accounts Division
- Company P.O. Accepted
- Training
- Equipment Maintenance
- Next Day Shipping

DISK CONTROLLERS

MAYNARD ELECTRONICS
Standard Disk Controller ... $ 115
with Parallel Port ... $ 165
with Serial Port ... $ 175
Sandstar Modular Disk Controller ... $ 199
All Sandstar Modular Options Avail. ... $ Call

SOFTWARE

ASHTON TATE
dBase II ... $ 285
dBase III ... $ Call
Framework ... $ Call

FOX & GELLER
Quickcode II or III ... $ 169
dGraph (Requires Graphics Card) ... $ Call
dUtil (Utilities For dBase II or III) ... $ Call

FUNK—Sideways ... $ 49
HAYES—Smartcom II ... $ 99
IMSI—4 Point Graphics (Rated #1) ... $ 89
(Inhance Lotus Graphics)

INDIVIDUAL SOFTWARE
Tutorial Set (IBM PC/XT and DOS) ... $ 79
Typing Instructor ... $ 39

INFOCOM—Zork I, II, III ... $ 29
All games available ... $ Call

INFORMATION UNLIMITED SOFTWARE
EasyWriter II System ... $ 195
Accounts Receivable ... $ 299
Accounts Payable ... $ 299
General Ledger ... $ 299
Payroll ... $ 369

LATTICE
C-Compiler ... $ 299
C-Food Smorgasboard ... $ 110

LIFETREE
Volkswriter Deluxe w/TextMerge ... $ 169

LOTUS DEVELOPMENT
Lotus 1-2-3 (Version 1A) ... $ Call
Symphony ... $ Call

MICRO DATA BASE SYSTEMS
Knowledgeman ... $ 299

MICROPRO
Wordstar w/Tutorial on Disk ... $ 229
ProPack (Wordstar/MailMerge/CorrectStar/StarIndex) ... $ 329
ProfessionalPlus (ProPack plus TelMerge Electronic Mail System Mailing List Management and Business Letters) ... $ 369

MICRORIM
R.base 4000 ... $ 299
Clout ... $ 139
Extended Report Writer ... $ Call

MICROSOFT
C-Compiler ... $ 349
Flight Simulator ... $ 35
Multiplan (New Version) ... $ 149
Project (Project Manager) ... $ 180
Chart ... $ 180
Word ... $ 239
Word w/Mouse ... $ 299
Mouse w/Software ... $ 159

MICROSTUF
Crosstalk XVI (for Hayes Smartmodem) ... $ 99

MORGAN COMPUTING
Trace 86 (Assembly Language Debug) $ 99
Ted (Program Editor) ... $ 79
Professional Basic (170K Work Space w/8087 Support) ... $ 79

MULTIMATE INTERNATIONAL
Multimate ... $ 269

PETER NORTON
Norton Utilities ... $ 55

ROSESOFT
Prokey (Newest Version) ... $ 95

SATELLITE SOFTWARE INTERNATIONAL
Word Perfect (includes Speller) ... $ 269

SOFTWARE PRODUCTS
Open Access ... $ 299

SOFTWARE PUBLISHING
PFS/Access ... $ 65
PFS/File ... $ 89
PFS/Graph ... $ 89
PFS/Report ... $ 79
PFS/Write ... $ 79

WANG PUBLICATION
Random House Proof Reader (50K) ... $ 45

WORDTECH SYSTEMS
dB/Compiler (True dBase II Compiler) ... $ Call

OUR POLICY
• We accept VISA, MasterCard, Money Orders, Certified Checks, Cashiers Checks, Personal Checks, Wired Funds • We do not charge your card until we ship • **No surcharge added on VISA and MasterCard** • Allow one week for personal and company checks to clear • COD maximum $500 Cash or Certified check on delivery • Please use local phone number for order status inquiries • Prices subject to change without notice • Returns may be subject to restocking fee.

SHIPPING (U.S.). For monitors, and hard disk drives add 2% to all orders. Blue label and Next Day Air available. For all other items add $4. **Most orders shipped next day.**

When you need competitive prices, prompt service and complete support, call us. Inquiry 26

APPLIED COMPUTER PRODUCTS INC.
1633 Republic Road, Huntingdon Valley, PA 19006
215-322-6500 Telex 756876 UD

1-800-223-3860

*IBM is a registered trademark of International Business Machines.

Now you can get personal with a Datasouth.



Say hello to the Datasouth Personal Printer—an office-quality dot matrix printer that makes itself right at home next to your personal computer.

Technically speaking, the Personal Printer is "Epson compatible." But it's better than the competing Epson because it also does near-letter-quality printing.

Personally speaking, the Personal Printer is "checkbook compatible." So you don't have to sacrifice the money you need to get the printer you want. And it comes in two models—one with a 10-inch and one with a 17-inch carriage.



Make a personal visit to your local computer store, and bring home legendary Datasouth performance for an affordably personal price. The Personal Printer. Only from Datasouth.

personal

datasouth

HIGH PERFORMANCE MATRIX PRINTERS

Find Datasouth Printers At Participating **ComputerLand**® Stores And Other Fine Dealers.

Datasouth Computer Corporation
Box 240947 · Charlotte, NC 28224
704/523-8500 · Telex 6843018 DASOU UW

CALL TOLL FREE:
1-800-222-4528

Inquiry 104

BY PAUL A. NILSON

ALGORITHMS FOR A VARIABLE-PRECISION CALCULATOR

A pseudocode is used to describe the logic behind the algorithms

I developed the algorithms described here in the process of building a variable-precision calculator, which is now an integral part of a commercial spreadsheet package. I believe the material covered in this article will be valuable to people who need to perform decimal computations on large numbers.

I have a 68000-based microprocessor running a UNIX operating system with C as the main programming language. Using my version of C on the 68000, I can represent numbers as integers (16 bits) or long integers (32 bits). I have no floating-point arithmetic package. Because 32 bits limits me to nondecimal numbers with a range of −2,147,483,648 to +2,147,483,647, I needed the capacity to handle more digits and the decimal point. I thought, "How many digits are enough?"

I had only two routes to follow. The first was to pick a number (perhaps 100 digits) and develop fixed-precision algorithms using that as a base. The other approach was to let users specify what precision they needed and develop the necessary algorithms to support variable precision. I chose the second approach because the algorithms for a variable-precision calculator are really not much more complicated than those for fixed-precision calculators, and because they do not have the internal string space overhead common to fixed-precision calculators.

I gave considerable thought to computation speed. Using division as an example, I am able to divide a 40-digit number by an 8-digit number to 100 places of accuracy in 71 milliseconds (ms). Considering that I am dealing with numbers represented as digits within character strings, that is a fairly quick computation. If I were to code the calculator in assembly language it would speed it up even more.

PREPROCESSING

The calculator is set up with virtually no internal string space. The user routine that calls the calculator defines within itself three character arrays and passes pointers to those arrays to the calculator. Two of these arrays (first and second) hold the operands while the third array (results) holds the results from the computation. The arrays are defined externally to the calculator so that a user can have the flexibility of defining only as much string space as is necessary, based on the precision of the computation. The user routine also passes to the calculator an integer that defines the precision of the computation and a character (+, −, *, /) to indicate the operand. Decimal points, signs, and leading or trailing blanks can be used in the number strings. The number strings (first and second) are unmodified by the calculator.

Upon being called, the first thing the calculator routine does is establish a set of integers related to each of the number strings. These integers point to the first digit, the last digit, the

(continued)

Paul A. Nilson (6635 Southwest Hyland Highway, Beaverton, OR 97005) is an application development manager at Graphic Software Systems in Wilsonville, Oregon. He has an M.S. in mathematics from San Jose State University, California. He is the founder of Midnight Oil Inc., a software marketing firm.

decimal point, and the current position within the number string. Using the first (addition) operand as an example, the integers are represented as *f*head, *f*tail, *f*point, and *f*current. Figure 1 shows the results of pointing to the fourth character position in the first array. The second and results number strings have similar integers, and their variable names start with an *s* or *r*, respectively.

(The algorithms presented here are written in a pseudocode. This code is not a real language; it merely serves as a shorthand notation to describe the logic of the algorithms.)

ADDITION

Addition is a snap. All you need to do is determine which of the two operands has the longest tail following the decimal (i.e., *f*tail-*f*point vs. *s*tail-*s*point). You then place the current pointers for both numbers the same distance to the right of the respective decimals and proceed from the right to the left, adding the corresponding digits of both numbers and bringing forward a carry. If a number does not have a digit for that position, then 0 is assumed (see figure 2).

To handle cases in which the return value array is not long enough to hold all the digits resulting from the addition, shift the digits right 1 byte each time a new digit is computed to produce a full return string. You can do this as long as there is some tail left after the decimal point. If you find that a right shift will destroy digits to the left of the decimal, an error should be returned. Note also that an addition of two numbers with different signs is really a subtraction and should be handled as such.

```
Array position   0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
          first =  + 1 2 3 . 4

fhead    = 2        fhead digit    = 1
ftail    = 6        ftail digit    = 4
fpoint   = 5        fpoint digit   = .
fcurrent = 4        fcurrent digit = 3
```

Figure 1: *An example of the pseudocode labeling.*

Addition Example

```
        1     2     3 .  4
  +           5     6 .  7     8
      1+0   2+5   3+6   4+7   0+8
0     0     1     1     0     0        Carry
0     1     8     0 .  1     8
```

Addition Pseudocode

```
length   = ftail - fpoint or stail - spoint; (whichever is longer)
fcurrent = fpoint + length;
scurrent = spoint + length;
rcurrent = rtail;
carry    = 0;

while (( fcurrent >= head ) or ( scurrent >= shead ))
{
    rcurrent digit = fcurrent digit + scurrent digit + carry;
    if ( rcurrent digit >= 10 )
    {
        rcurrent digit = rcurrent digit - 10;
        carry = 1;

    }
    else
    {
        carry = 0;
    }
    decrement fcurrent, scurrent, and rcurrent;
}
```

Figure 2: *Addition algorithm example and pseudocode.*

SUBTRACTION

Subtraction, like addition, is very easy. Once again, we work from the right to the left, bringing along a borrow (see figure 3). Note that the subtraction of two numbers with different signs is really an addition and should be handled as such. Note also that a smaller number always is subtracted from a larger number, with the appropriate sign affixed. This eliminates the need to worry about complement arithmetic while performing the algorithm.

MULTIPLICATION

With multiplication, things start to get interesting. Once again, the action is from right to left and includes bringing along a carry. In multiplication and division you do not need to worry about the length of the longest tail. The computations are independent of decimal-point location (see figure 4). The final position of the decimal in the array results is determined after the computation is complete.

To multiply, all you need is to define two loops. The inner loop carries over the number of digits of the second operand (in this case, four: the digits 5, 6, 7, and 8). The outer loop carries over the sum of the number of digits in the two operands (in this case, eight). Once again, the digits in the return string must be shifted to the

(continued)



If you're running out of ways to tell your boss the copier broke again, it's time for a Panasonic.

If a broken copier causes your boss so much pain you'd like to put him out of his misery, tell him about the new Panasonic high-speed copier, the FP-4520. It has advanced electronics specially designed to help prevent breakdowns. This Panasonic will give you fast relief when you need copies quick. It can make 45 copies per minute. Its four modes of reduction and three modes of enlargement can make changing copy sizes a lot less painful. And because the FP-4520 can grow into a complete system, with sorter, ADF, and large capacity paper cassette, it can solve almost any copying headache. So, before a broken copier gives your boss a migraine, tell him it's time for a Panasonic.

If you're afraid to talk to your boss, talk to us. Just call Panasonic at **1-800-526-0354**. In New Jersey, call **(201) 384-0275**. And ask about PANAP,™ our national rental and purchase program for major accounts.

Panasonic®
just slightly ahead of our time.

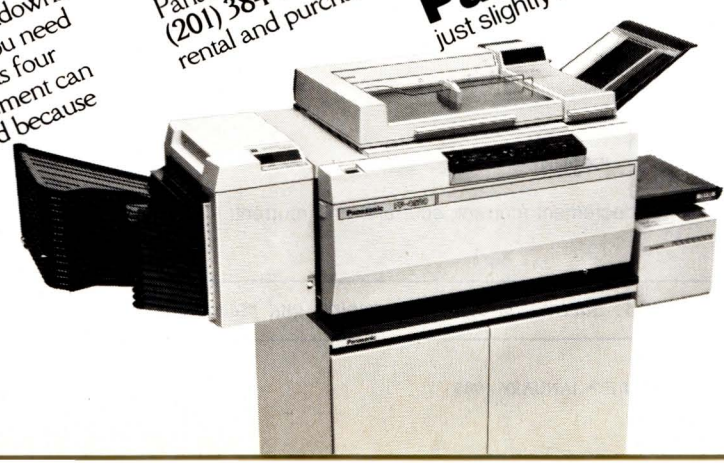

Inquiry 269

right if there is not enough room to hold all the digits returned from the multiplication. If a shift will result in loss of digits to the left of the decimal, an error should be returned from the multiplication.

The integer example in figure 3 works for any two numbers, but it involves a lot of multiplications. In certain cases, things can be done to speed up the multiplication. Because I can represent any number with nine or fewer digits as a long integer, I can take advantage of that fact. If either first or second can be represented by eight digits, I can convert it to a long integer and multiply it as a whole by each character of the other number, obtaining a number that will always be nine digits or less. This eliminates the inner loop in the multiplication and speeds up the algorithm considerably. Figure 3 also shows the results of converting the second operand (5, 6, 7, 8) to a long integer.

As can be seen, the algorithm using long integers requires far fewer multiplications than the one using characters. If, however, neither number is a candidate for a long-integer operation, then an approach using character manipulation must be used. There is a speed advantage in the character algorithm if the first operand is the longer number, however.

DIVISION

Division is totally different from the other three operands. While addition, subtraction, and multiplication are straightforward algorithms that work from the right to the left, division is a process of successive approximations that works from left to right (see figure 5).

As you learned in grammar school, the process for finding each digit in the quotient involves making a guess for the digit, multiplying the digit by the divisor, and subtracting the result of the multiplication from the remainder of the previous process, remembering to bring down either a 0 or a digit (depending on what's left in the dividend). Because a computer can't guess at a trial digit, what is generally done is a series of trials for each digit. First, a 1 is tried as a target digit in the quotient. If the remainder is negative, then 0 is the proper digit for that position in the quotient. If the remainder is positive, then 2 is tried. This continues until the remainder turns negative, at which time the $n-1$ digit is placed in the quotient. This approach results in about five trials for each digit returned to the quotient.

My approach is a little different. While I first try the digit 1, I save the remainder and divide that by the divisor to determine what the actual digit should be. In general, only one trial per digit is necessary with this approach.

As shown in the long-integer example in figure 5, I start out by multiplying the second by a 1 to get a product. I then subtract the product from the first and look at the remainder. In the first four tries, the remainder was a negative number, which implied that 1 was too big and that 0 should be used in its place. On the fifth try, I got a nonzero remainder (+6662). Dividing this remainder by the second (+5678) yields a factor of 1. Adding this factor to the trial digit (1) shows that the actual digit in the results array should have been 2. This number is then placed in the results array at the fifth position to compute the sixth position.

As in multiplication, there are two cases to consider for division. If the number of significant digits in second is less than or equal to eight, you can use a long-integer algorithm (in which the divisor is placed into a long variable) and call a routine that will use the long-integer algorithm. If, however, the number of digits in the divisor is too large to let it be placed into a long-integer algorithm, you must call a character-based algorithm. This

(continued)

Subtraction Example

	1	2	3 .	4		First
−		5	6 .	7	8	Second
	1−0	2−5	3−6	4−7	0−8	(note: 0−8 <==> 10−8 borrow 1)
0	−1	−1	−1	−1	0	Borrow
0	0	6	6 .	6	2	Results

Subtraction Pseudocode

```
length   = ftail − fpoint or stail − spoint; (whichever is longer)
fcurrent = fpoint + length;
scurrent = spoint + length;
rcurrent = rtail;
borrow   = 0;

while (( fcurrent >= head ) or ( scurrent >= shead ))
{
    rcurrent digit = fcurrent digit − scurrent digit − borrow;
    if ( rcurrent digit < 0 )
    {
        rcurrent digit = rcurrent digit + 10;
        borrow = 1;

    }
    else
    {
        borrow = 0;
    }
    decrement fcurrent, scurrent, and rcurrent;
}
```

Figure 3: *Subtraction algorithm example and pseudocode.*

Introducing the Most Powerful Business Software Ever!

TRS-80™ (Model I, II, III, or 16) • APPLE™ • IBM™ • OSBORNE™ • CP/M™ • XEROX™

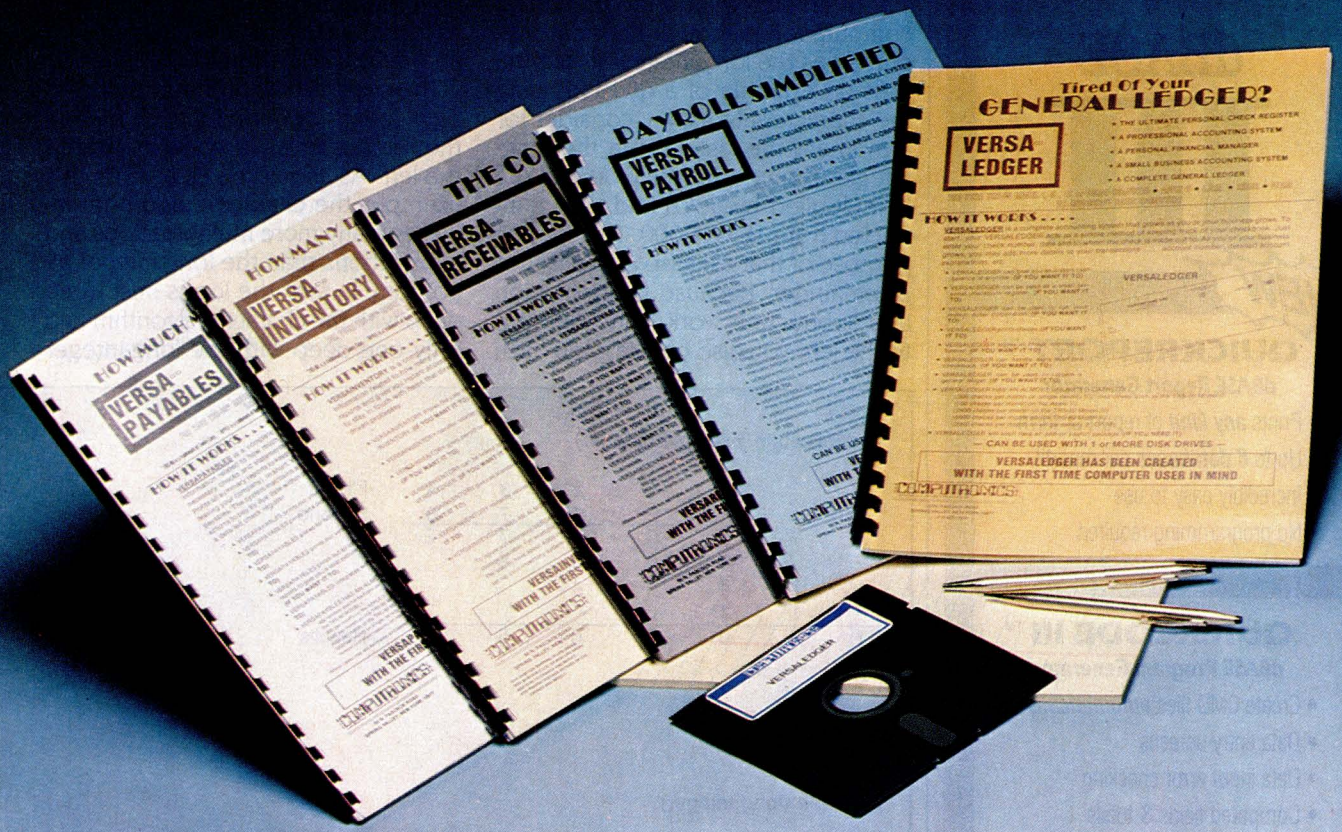

The VERSABUSINESS™ Series

Each **VERSABUSINESS** module can be purchased and used independently, or can be linked in any combination to form a complete, coordinated business system.

VERSARECEIVABLES™ $99.95

VERSARECEIVABLES™ is a complete menu-driven accounts receivable, invoicing, and monthly statement-generating system. It keeps track of all information related to who owes you or your company money, and can provide automatic billing for past due accounts. VERSARECEIVABLES™ prints all necessary statements, invoices, and summary reports and can be linked with VERSALEDGER II™ and VERSAINVENTORY™.

VERSAPAYABLES™ $99.95

VERSAPAYABLES™ is designed to keep track of current and aged payables, keeping you in touch with all information regarding how much money your company owes, and to whom. VERSAPAYABLES™ maintains a complete record on each vendor, prints checks, check registers, vouchers, transaction reports, aged payables reports, vendor reports, and more. With VERSAPAYABLES™, you can even let your computer automatically select which vouchers are to be paid.

VERSAPAYROLL™ $99.95

VERSAPAYROLL™ is a powerful and sophisticated, but easy to use payroll system that keeps track of all government-required payroll information. Complete employee records are maintained, and all necessary payroll calculations are performed automatically, with totals displayed on screen for operator approval. A payroll can be run totally, automatically, or the operator can intervene to prevent a check from being printed, or to alter information on it. If desired, totals may be posted to the VERSALEDGER II™ system.

VERSAINVENTORY™ $99.95

VERSAINVENTORY™ is a complete inventory control system that gives you instant access to data on any item. VERSAINVENTORY™ keeps track of all information related to what items are in stock, out of stock, on backorder, etc., stores sales and pricing data, alerts you when an item falls below a preset reorder point, and allows you to enter and print invoices directly or to link with the VERSARECEIVABLES™ system. VERSAINVENTORY™ prints all needed inventory listings, reports of items below reorder point, inventory value reports, period and year-to-date sales reports, price lists, inventory checklists, etc.

VERSALEDGER II™ $149.95

VERSALEDGER II™ is a complete accounting system that grows as your business grows. VERSALEDGER II™ can be used as a simple personal checkbook register, expanded to a small business bookkeeping system or developed into a large corporate general ledger system **without any additional software.**

- VERSALEDGER II™ gives you almost unlimited storage capacity (300 to 10,000 entries per month, depending on the system),
- stores all check and general ledger information forever,
- prints tractor-feed checks,
- handles multiple checkbooks and general ledgers,
- prints 17 customized accounting reports including check registers, balance sheets, income statements, transaction reports, account listings, etc.

VERSALEDGER II™ comes with a professionally-written 160 page manual designed for first-time users. The VERSALEDGER II™ manual will help you become quickly familiar with VERSALEDGER II™, using complete sample data files supplied on diskette and more than 50 pages of sample printouts.

SATISFACTION GUARANTEED!

Every **VERSABUSINESS™** module is guaranteed to outperform all other competitive systems, and at a fraction of their cost. If you are not satisfied with any **VERSABUSINESS™** module, you may return it within 30 days for a refund. Manuals for any **VERSABUSINESS™** module may be purchased for $25 each, credited toward a later purchase of that module.

To Order:

Write or call Toll-free (800) 431-2818
(N.Y.S. residents call 914-425-1535)

* add $3 for shipping in UPS areas
* add $4 for C.O.D. or non-UPS areas
* add $5 to CANADA or MEXICO
* add proper postage elsewhere

Inquiry 154

DEALER INQUIRIES WELCOME

All prices and specifications subject to change / Delivery subject to availability.

COMPUTRONICS INC

50 N. PASCACK ROAD, SPRING VALLEY, N.Y. 10977

* TRS-80 is a trademark of the Radio Shack Division of Tandy Corp. - *APPLE is a trademark of Apple Corp. - *IBM is a trademark of IBM Corp. - *OSBORNE is a trademark of Osborne Corp. *CP/M is a trademark of Digital Research - *XEROX is a trademark of Xerox Corp.

Inquiry 136



FOX & GELLER PRESENT
The Latest Products for

dBASE III

NEW
QUICKREPORT ™
dBASE Report Generator
- Prints *any kind* of report or form
- Up to *6 databases* per report!!
- Incredibly easy to use
- No programming required

QUICKCODE III ™
dBASE Program Generator
- Create CMD files *automatically*
- Data entry screens
- Data input error checking
- Computed fields & totals
- Link up to 8 databases!

Why write programs yourself?
Let QUICKCODE III do it!

dGRAPH III ™
dBASE Graphics System
- Pie, line, bar charts
- Printer, plotter, or CRT
- Many automatic features

dUTIL III ™
dBASE Program Utility
- Finds program errors
- Improves code
- Saves time

—Versions available for dBASE II—

INFORMATION HOTLINE
800-221-0156
FOX & GELLER
Fox & Geller, Inc. 604 Market St., Elmwood Park, N.J. 07407

dBASE II and dBASE III are trademarks of Ashton-Tate
QUICKCODE and QUICKCODE III are trademarks of Fox & Geller, Inc.

algorithm also will do the preceding computation, although not nearly as quickly as the long-integer algorithm.

As an example of a division using the character algorithm, consider for a moment the last case in the long-integer example, in which 000021731 is multiplied by 5678 and then subtracted from 123400000. The specific purpose of that exercise is to produce a remainder. Because multiplication and subtraction work from the right to the left, you also can develop each digit in the remainder from the right to the left by doing the multiplication and subtraction simultaneously.

The character algorithm works from right to left, developing each digit in the remainder as it works its way to the left. As should be clear from this example, the character algorithm involves many more multiplications and subtractions than the long-integer algorithm. In fact, the loops nest three deep with the character algorithm and only one deep with the long-integer

Multiplication Example (integer)

			1	2	3	4	First
		×	5	6	7	8	Second
			9	8	7	2	
		8	6	3	8		
	7	4	0	4			
6	1	7	0				
7	0	0	6	6	5	2	Results

Example (long integer)

			1	2	3	4	First
×			5	6	7	8	Second
5678 × 0	5678 × 0	5678 × 0	5678 × 1	5678 × 2	5678 × 3	5678 × 4	
0	0	0	5678	11356	17034	22712	Product
7	70	700	1328	1930	2271	0	Carry
7	0	0	6	6	5	2	Results

Example (character)

				1	2	3	4	First
×				5	6	7	8	Second
0×8	0×8	0×8	0×8	1×8	2×8	3×8	4×8	
0×7	0×7	0×7	1×7	2×7	3×7	4×7	0×7	
0×6	0×6	1×6	2×6	3×6	4×6	0×6	0×6	
0×5	1×5	2×5	3×5	4×5	0×5	0×5	0×5	
0	0	0	0	8	16	24	32	
0	0	0	7	14	21	28	0	
0	0	6	12	18	24	0	0	
0	5	10	15	20	0	0	0	
0	5	16	34	60	61	52	32	Product
0	2	4	6	6	5	3	0	Carry
0	7	0	0	6	6	5	2	Results

Figure 4: *Multiplication algorithm examples and pseudocode.*

algorithm. The character algorithm does have one saving grace, though: it works for any number of any size.

In using the character algorithm, a very important point to consider is the handling of the remainder. The character routine is called only because the divisor is too big to fit into a long integer. This means that the remainder also will be too big to fit into a long integer. In this case, as the remainder is developed, the first eight digits of the remainder are stored in an array. When it is time to figure the factor, the remainder from the array and the first eight digits of the divisor (second) are moved to a long-integer algorithm and divided one by the other to figure the factor. This usually gives satisfactory results, enabling the correct factor to be predicted accurately. Consider, though, the case where the remainder is very nearly an exact multiple of the divisor. While this doesn't happen very often,

(continued)

Multiplication Pseudocode (character algorithm)

```
flength = ftail - fhead + 1;        ( First's length )
slength = stail - shead + 1;        ( Second's length )
tlength = slength + flength;        ( total length )
rcurrent = rtail;                   ( start at the right and work left )
carry = 0;
offset = 0;

while ( offset < tlength )
{
     product = carry;
     j = 0;
     while ( j < slength )
     {
          scurrent = stail - j;
          fcurrent = ftail + j - offset;
          product = product + fcurrent digit × scurrent digit;
          increment j;
     }
     rcurrent digit = product mod 10;
     carry = ( product - rcurrent digit ) / 10;
     increment offset;
     decrement rcurrent;
}
```

Multiplication Pseudocode (long-integer algorithm)

```
flength = ftail - fhead + 1;        ( First's length )
slength = stail - shead + 1;        ( Second's length )
tlength = slength + flength;        ( total length )
rcurrent = rtail;                   ( start at the right and work left )
slong = Second as a long integer
carry = 0;
offset = 0;

while ( offset < tlength )
{
     product = carry;
     fcurrent = ftail - offset;
     product = product + fcurrent digit × slong;
     rcurrent digit = product mod 10;
     carry = ( product - rcurrent digit ) / 10;
     increment offset;
     decrement rcurrent; )
}
```


ATTENTION!!

68000 Systems users running CP/M - 68K[1]

The ERG family of 68K or UNIX V[6] software:

- **VED 68K[2] A screen oriented editor for general text and program preparation. Features include wrap mode, block copy and move, tabs, find, search and replace plus much more.**
- **EM8O[2] An 8080 emulator that can execute CP/M - 80 programs under CP/M - 68K. Run Wordstar[3], DBasell[4], and more.**
- **68KBASIC[2] A high level AlphaBASIC compatible compiler. Alphanumeric labels, extended tab functions and string handling, many powerful substring modifiers, built-in ISAM indexed file system, and memory mapping.**
- **68KFORTH[2] The powerful FORTH systems language now under CP/M - 68K. A completely integrated disk based package.**
- **Whitesmiths' C[5] A Unix[6] C compatible compiler (CP/M - 68K only).**
- **SVS FORTRAN[7], SVS BASIC + [7], and SVS PASCAL[7] available on a wide range of hardware. Call for specifics.**

ATTENTION

HP Series 200[8] Owners

- **CP/M - 68K (version 1.2) operating system.**
- **All of the software mentioned above is available now for HP Series 200 computers running CP/M - 68K.**

Trademark: [1]Digital Research, [2]ERG, [3]Micropro, [4]Ashton Tate, [5]Whitesmith, [6]Bell Labs, [7]Silicon Valley Software, [8]Hewlitt Packard

OEM Discounts



Empirical Research Group
1112 S. 344th St. #310
Federal Way, WA 98003
(206) 874-4844

Division Example

```
                                0 0 0 0 2 . 1 7 3 3   Results
Second 5 6 7 . 8 | 1 2 3 4 0                          First
                 - 1 1 3 5 6                          Product
                       9 8 4 0                        Remainder
                     - 5 6 7 8                        Product
                       4 1 6 2 0                      Remainder
                     - 3 9 7 4 6                      .
                         1 8 7 4 0                    .
                       - 1 7 0 3 4                    .
                           1 7 0 6 0
                         - 1 7 0 3 4
                                 2 6                  etc.
```

Example (long integer)

Trial Results		Second		Trial Product		First		Remainder		Process		Actual Results
1	×	5678	=	5678	−	1	==>	− 5677			−1+1	= 0
01	×	5678	=	5678	−	12	==>	− 5666			−1+1	= 0
001	×	5678	=	5678	−	123	==>	− 5555			−1+1	= 0
0001	×	5678	=	5678	−	1234	==>	− 4444			−1+1	= 0
00001	×	5678	=	5678	−	12340	==>	+ 6662	/	5678	= 1+1	= 2
000021	×	5678	=	119238	−	123400	==>	+ 4162	/	5678	= 0+1	= 1
0000211	×	5678	=	1198058	−	1234000	==>	+35942	/	5678	= 6+1	= 7
00002171	×	5678	=	12326938	−	12340000	==>	+13062	/	5678	= 2+1	= 3
000021731	×	5678	=	123388618	−	123400000	==>	+11382	/	5678	= 2+1	= 3
0000217331						etc.						

Example (character)

0	0	0	0	2	1	7	3	1	Results
×					5	6	7	8	Second
0×8	0×8	0×8	0×8	2×8	1×8	7×8	3×8	1×8	Multiply
0×7	0×7	0×7	2×7	1×7	7×7	3×7	1×7	0×7	
0×6	0×6	2×6	1×6	7×6	3×6	1×6	0×6	0×6	
0×6	2×5	1×5	7×5	3×5	1×5	0×5	0×5	0×5	
0	0	0	0	16	8	56	24	8	
0	0	0	14	7	49	21	7	0	
0	0	12	6	42	18	6	0	0	
0	10	5	35	15	5	0	0	0	
0	10	17	55	80	80	83	31	8	
1	2	6	8	8	8	3	0	0	Carry
1	2	3	3	8	8	6	1	8	Product
									Subtract
1	2	3	4	0	0	0	0	0	First
− 1	2	3	3	8	8	6	1	8	Product
1−1	2−2	3−3	4−3	0−8	0−8	0−6	0−1	0−8	
0	0	0	−1	−1	−1	−1	−1	0	Borrow
0	0	0	0	1	1	3	8	2	Remainder

Division Pseudocode (long-integer algorithm)

```
remainder = 0;
rcurrent = rhead;
slong = second in a long variable;

while ( rcurrent <= rtail )
{
    rcurrent digit = 1;                                  ( trial digit )
    rlength = current length of the results string;
    fcurrent = fhead + rlength − 1;
    dividend = remainder × 10 + fcurrent digit;          ( drop next digit )

    rcurrent digit = dividend / slong;                   ( divide )
    remainder = dividend − rcurrent digit × slong;       ( get remainder )
    dividend = remainder;                                ( set up next pass )
    increment rcurrent;
}
```

Figure 5: *Division algorithm examples and pseudocode.*

Division Pseudocode (character algorithm)

```
remainder = 0;
rcurrent = rhead ;

while ( rcurrent <= rtail )
{
     rcurrent digit = 1;                                        ( trial digit )
     flength = ftail - fhead + 1;
     slength = stail - shead + 1;
     factor = carry = borrow = offset = 0;

     while ( offset < flength )
     {
                                                                ( multiply )

          product = carry;
          j = 0
          while ( j < slength )
          {
               scurrent = stail - j;
               fcurrent = ftail + j - offset;
               product = product + fcurrent digit x scurrent digit;
               increment j;
          }
          rcurrent digit = product mod 10;
          rcarry = ( product - rcurrent digit ) / 10;

                                                                ( subtract )

          remainder digit = fcurrent digit - rcurrent digit - borrow;
          if ( remainder digit < 0 )
          {
             remainder digit = remainder digit + 10;
             borrow = 1;
          }
          else
          {
             borrow = 0
          }
          add remainder digit to remainder array;
}
                                                          ( handle remainder )

          rlong = convert remainder array to a long integer;      ( eight digits )
          slong = convert Second to a long integer;               ( eight digits )
          factor = rlong / slong;
          if ( factor >= 10 )
          {
             increment ( rcurrent - 1 ) digit;
             try rcurrent again;
          }

          if ( factor x ( divisor + 1 ) >= remainder )
          {
             rcurrent digit = factor;
          }
          else
          {
             rcurrent digit = factor + 1;
          }
          increment rcurrent;
}
```

Inquiry 51

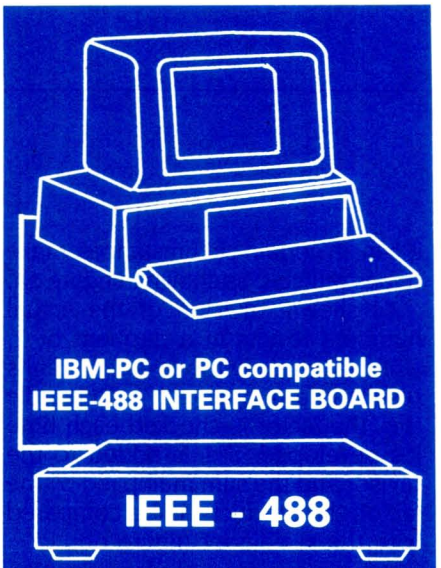

VERSATILE

- Implements the entire IEEE-488(GP-IB, HP-IB) standard with high-level commands and standard mnemonics.
- Resident firmware routines support interpreted and compiled BASIC, Pascal, C, and other languages.
- Supports **Lotus 123** and most wordprocessing programs.
- One board drives any combination of 15 IEEE-488 peripherals.
- Emulates most Hewlett-Packard controller functions and graphics language statements with single line BASIC statements.
- Supports Tektronix® Standard Codes and Formats.
- Small size - fits the PC/XT short slot.

FAST

- Burst DMA > 800KB/sec
- Continuous DMA > 300KB/sec

PROFESSIONAL

- Clear, concise documentation includes a complete tutorial and source code for interactive bus control, bus diagnostics, graphics plotting, and many other applications.
- **$395 complete.** There are no extra software charges.

CEC
CAPITAL EQUIPMENT CORP.

10 Evergreen Avenue
Burlington, MA. 01803
(617) 273-1818

IBM is a trademark of International Business Machines Corp.
Lotus 123 is a trademark of Lotus Development

it can, in certain circumstances, make things difficult, as shown in figure 6a.

As shown, division of the actual numbers results in a quotient of 2, while taking only the first eight digits results in a quotient of 3. To handle this, the factor is checked each time it's developed. If 1 is added to the divisor and the sum multiplied by the factor, the product can be compared with the remainder (figure 6b).

Generally, the product should be less than the remainder. If it is greater than or equal to the remainder, you cannot be absolutely sure that a factor of 3 is correct. Therefore, you must assume the worst case and decrement the factor by 1 and use that value to predict the actual digit. In this case, you would assume that the factor of 2 was correct. It could be, though, that 3 was the correct digit to use; this will be discovered on the next pass through the character routine when the factor produced is greater than 9. At that time, you must go back and increment by 1 the actual digit used in the previous case, taking care to handle strings of 9s correctly (e.g., 399 + 1 = 400) and tell the division routine to call the character routine again for the current digit. What all this means is that in this special case you will at worst have to make two trials to get a given digit for the result. Generally, though, one trial is sufficient.

(6a)

	Remainder		Divisor		Factor
Actual numbers	370370365	/	123456789	=	2
First eight digits	37037036	/	12345678	=	3

(6b)

Divisor + 1		Factor		Product		Remainder
(12345678 + 1)	×	3	=	37037037	>=	37037036

Figure 6: *Comparison of factor-determining approaches: actual numbers vs. the first eight digits (a) and comparing the product and the remainder (b).*

SUMMARY

In this article, I've described addition, subtraction, multiplication, and division algorithmic approaches used in a commercial spreadsheet. The logic behind the algorithms is described using a pseudocode—not an actual programming language. ■

Come visit us in our Long Island Showroom
226 Sherwood Ave.
Farmingdale, NY 11735

ComputerChannel

Se Habla Español
Cable:COMSYSTEC NEWYORK
Telex: CSTNY 429418

OUR SPECIALTY: IBM COMPATIBLE PRODUCTS, GRAPHICS, DATABASE, 68000 UNIX, EXPORT

IBM PC & COMPATIBLES

Fantasic busboard for expansion
BASIC BUSBOARD, 0 RAM....**$169**
Add up to 512K RAM+ unlimited number of modules listed below:

Async I/O.....**$88**
Parallel I/O.....**63**
Clock Calendar.....**69**
Game I/O.....**69**
Floppy controller.....**160**
Monochrome adaptor.....**190**
16 channel A/D.....**110**
8-bit I/O module.....**69**
64K RAM kit (9 chips).....**45**
BUSBOARD with 512K RAM.....**450**

Cromemco SYSTEMS AND COMPONENTS..**CALL**

Prices subject to change. American Express, Visa/Mastercard add 3%. F.O.B. point of shipment. 20% restocking fee for returned merchandise. Personal checks take 3 weeks to clear. COD on certified check only. N.Y. residents add sales tax. Manufacturers' warranty only. International customers, please confirm price before order. Accept P.O. from Fortune 500, schools and gov't.

Computer Channel
226 Sherwood Ave.
Farmingdale, NY 11735
TELEX: 429418 CSTNY
For information CALL (516) 420-0142
To order CALL 1-800-331-3341

NEW
CASH REGISTER—COMPUTER COMBINATION SYSTEM—CALL!

ACCESSORIES

IBM PC 1 or 2 to XT upgrade ROM BIOS.....**$119**
TAVA and PC COMPATIBLES 2.0 UPGRADE ROM BIOS.....**85**
360K slimline floppy drive.....**195**
3½" 500K DRIVE.....**205**
STARLINK - 5 USERS ON PC.....**1,400**
10 MB hard disk w/controller.....**810**
ROM for IBM PC-1 (old version)
allow boot from hard disk, speed up processing.....**99**

NETWORKS—MULTIUSER SYSTEMS
CAD CAE, CAM SYSTEMS
3Com Ethernet network.....**CALL**
File Server w/513 MB Winchester hard disk, 160 MB streamer tape backup, latest technology
Bring the mainframe power to PC!

SYSTEM CONFIGURATION
We assemble systems at special prices, including software, special operating systems, shells etc. Call us for business systems, CAD systems, networking, LANS, graphics, mainframe links, interfacing, application integration.
MULTI USER SOFTWARE USING MSDOS
FORTUNE 1500 COMPANIES— LET US SOLVE YOUR SYSTEM NEEDS!

Special Sale Items

high quality diskettes...
5¼" DSDD Soft Sector w/Hub Ring
Bulk (min.20).....**$1.49 ea.**
DYSAN, 3M.....**CALL**
Maxwell for IBM AT.....**6.75 ea.**

3½" SS for APPLE etc.....**4.50 ea.**

TELECOMMUNICATION
STUDENT BACK TO SCHOOL SPECIAL **$470**
ZENITH ZT1 terminal built in modem, auto dial your school computer

PORTABLES
Columbia, Eagle, NEC PC 8021, ZENITH, TELEVIDEO, COMPAQ, CORONA, LASER PRINTERS (HI-RES)
DESKTOPS: IBM PC/AT, ZENITH, APPLE, ETC.....**CALL**
TERMINALS, PRINTERS, MODEMS, PLOTTER, DIGITIZERS

Inquiry 71

Take control of your computer.

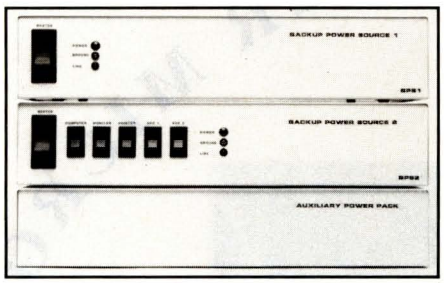

The Backups™

Backup power for peace of mind and memory.

Backup Power Source 1

- delivers up to 225 watts @ 120V.AC
- 40 minutes of power at 50% load
- visual and audible power interrupt alarm
- fast automatic switching
  (Within 6 milliseconds of peak voltage detection)
- 2 Outlets
- AC surge suppressor
- 3 stage noise filter
- thermal output protection
- IEC power connector
- attractive metal enclosure
- 3¼" high, 16" wide, 11" deep

$379.95 *complete**

Backup Power Source 2

All the features of Power Source 1 plus:
- 6 outlets controlled by front switches
- switchable visual and audible alarm
- 10 amp master switch circuit breaker
- cross suppression between all 6 outlets
- optional 2 hour auxiliary power pack

$499.95 *complete**

Auxiliary Power Pack

- 2 hours of power at full load
- plugs directly into either of our backup units
- includes 6 rechargable 12V power cells
- backup units keep power cells at full charge
- heavy duty power cable
- 3¼" high, 16" wide, 11" deep

$299.95 *complete**



The Expanders™

Control power and expand with floppy or hard disks.

Power Expansion 1

- 1 stage noise filter
- AC surge suppression
- IEC power connector
- attractive metal enclosure
- 3¼" high, 16" wide, 11" deep
- optional internal power supply
- optional floppy and hard disk drives

Power Expansion 1 . . . . . **$149.95***

w/Internal Power Supply **$219.95***

w/Power Supply, DS/DD Drive, All Cables and Instructions. Expands XT or Compatible **$349.95***

w/Power Supply, Half Height 10M Hard Disk Drive, All Cables and Instructions. Expands PC or Compatible . . . **$1149.95***

20M Drive **$1449.95***

Power Expansion 2

All the features of Power Expansion 1 plus:
- 6 outlets controlled by front switches
- 10 amp master switch circuit breaker
- LED ground and line indicators
- 3 stage noise filter
- cross suppression between all 6 outlets
- optional internal power supply
- optional floppy and hard disk drives

Power Expansion 2 . . . . . **$199.95***

w/Internal Power Supply **$269.95***

w/Power Supply, DS/DD Drive, All Cables and Instructions. Expands XT or Compatible **$399.95***

w/Power Supply, Half Height 10M Hard Disk Drive, All Cables and Instructions. Expands PC or Compatible . . . **$1199.95***

20M Drive **$1499.95***



The Controllers™

Control power, peripherals, spikes, and glitches.

Power Control 1

- 4 outlets control computer and 3 peripherals
- AC surge suppressor
- attractive metal enclosure
- 1¼" high, 16" wide, 10" deep

$69.95 *complete**

Power Control 2

All the features of Power Control 1 plus:
- 10 amp master switch circuit breaker
- 1 stage noise filter
- IEC power connector

$89.95 *complete**

Power Control 3

All the features of Power Control 1 & 2 plus:
- illuminated switches
- 3 stage noise filter
- cross suppression between all 4 outlets

$129.95 *complete**

**All prices suggested retail.*

Available at fine computer stores everywhere, or by mail or phone. MasterCard and Visa accepted. *Dealer inquiries invited.*

Relax Technology

The company that works so you can relax and get down to business.

3101 Whipple Rd. #25
Union City, CA 94587
415/471-6112

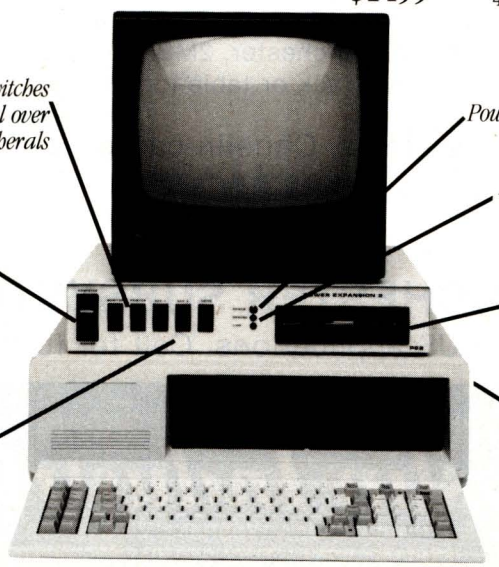

MORE THAN JUST ANOTHER MICRO

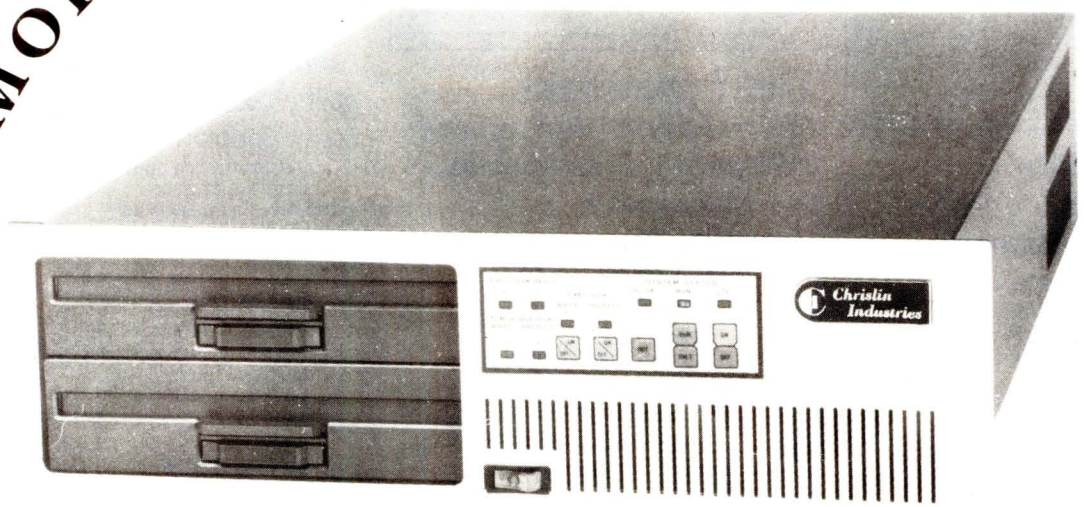

THE QBUS COMPATIBLE LEADER

Chrislin, the leader in QBUS compatibles for over a decade, now brings you the best assortment of microcomputer systems. Our QBUS family of products give you hundreds of configurations to choose from, while at the same time providing state of art technology at affordable pricing.

System configurations include DEC's LSI-11/23, 11/73, or MICROVAX CPU's. From 10MB to 140MB winchesters with floppy or tape backup. From 256K-4MB of RAM on a single card. Each unit operates all LSI-11 software without any modifications. Also, each system is completely QBUS compatible.

CI-MICRO-11C

LSI-11/73 CPU, 1MB RAM, 4x8 Backplane,
Power Supply, 4 serial I/O,
20MB winchester, 2MB 8" floppy,
all in a rack or table-top chassis.

$9695*

In addition to systems, Chrislin carries a complete line of

MEMORY

and

WINCHESTER SUBSYSTEMS

for your Q-BUS applications. Call for further details...

"OFFERING QUALITY WITH AFFORDABLE PRICING"

Chrislin Industries, Inc.

Inquiry 54

31352 Via Colinas • Westlake Village, CA 91362
Telephone: (818) 991-2254 • TWX 910-494-1253 CHRISLIN WKVG

*OEM Pricing. • LSI-11, MICROVAX, Q-BUS are trademarks of Digital Equipment Corporation.

BY VINCE BANES

AUDIO-FREQUENCY ANALYZER

Build IBM PC accessories to analyze your stereo

In this construction project, I'll show you how to chart the frequency response of your stereo using your computer. If high fidelity is not your cup of tea, you'll still learn how to interface a DAC (digital-to-analog converter), a VCO (voltage-controlled oscillator), and an ADC (analog-to-digital converter) to the IBM Personal Computer (PC) using a general-purpose I/O (input/output) device.

Figure 1 is a block diagram of the entire project, which is pictured in photo 1. The computer selects a control voltage for the VCO via the I/O section of the board and DAC. The sine-wave output signal from the VCO goes through the stereo's Aux (auxiliary) jack, through the stereo, and out the speaker. A microphone receives the audio energy from the speaker and feeds it through a full-wave rectifier to an ADC. The computer then reads the output of the ADC through the I/O section of the board. The system does not measure harmonic distortion; it just measures the power hitting the microphone when the system outputs a known frequency.

You could use a sine-wave generator and a very sensitive AC (alternating current) voltmeter to make these measurements. The results would be the same, but using the computer will make the tests easier and faster.

SYSTEM CONSIDERATIONS

This system measures the stereo's relative responses at different frequencies. The idea is to have the stereo sound as loud at 100 Hertz (Hz) as it does at 10,000 Hz, provided, of course, that the two signals have the same input-signal power. Therefore, we are not concerned with the exact value of the response, just how it compares with the responses at the other frequencies. Also, we want to determine what effects the room has on the stereo's sound.

The system must cover the normal audio-frequency spectrum (20 to 20,000 Hz), produce a sine wave that has less than 1 percent distortion, and have a constant power output for all frequencies. The ICL8038 waveform generator covers all of these requirements.

To reduce noise, you need shielded cables for the first stage of the input circuit. The inside of a computer is probably the worst place in the world to try to keep EMI (electromagnetic interference) noise down, but the shielding is good enough for this project. Since the noise level is constant, all of the input signals are biased equally. Thus, the difference between

(continued)

Vince Banes (2020 Sierra Dr., Lewisville, TX 75067) is an engineer with Texas Instruments. His interests include trying to find a perfect commodity-tracking system.

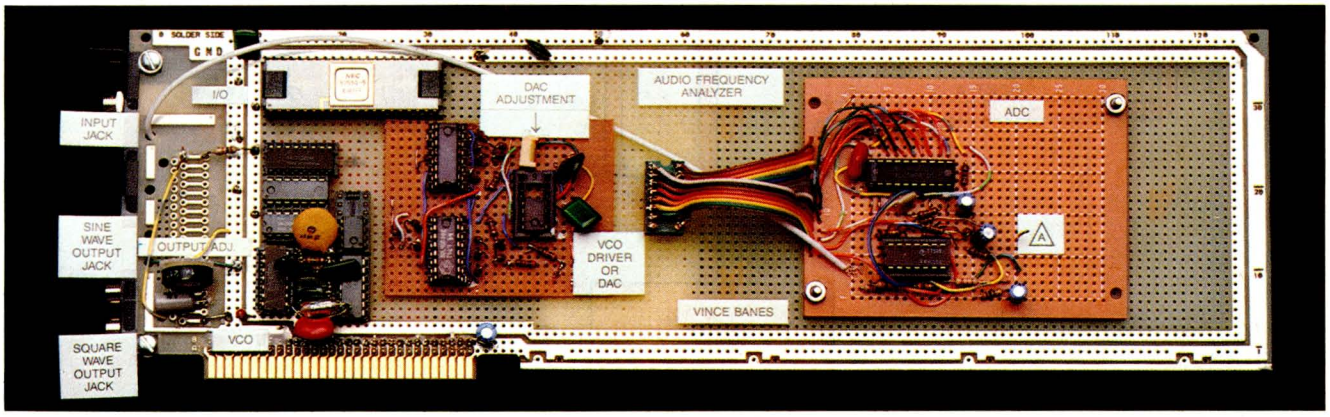

Photo 1: *Audio-frequency analyzer board.*

readings is constant. Keeping the noise less than 12 decibels (dB) below the signal being measured keeps the noise sufficently low. It is true that 12 dB sounds like a large signal-to-noise ratio, but for this application, we are looking only for deviations from the standard flat response curve. If the response differs by more than 12 dB from another signal, then an adjustment must be made to bring that frequency back to normal.

The microphone is the weakest link in the system, so try to use the best one you can find. I used a Pioneer DM-21, and the specifications on the box said that the response was flat from 20 to 12,000 Hz. The signal from this dynamic unidirectional microphone was just a few millivolts. I had to amplify it 300 times to get a usable 2-volt (V) signal.

Make sure you connect the output from the VCO to either the Aux or Tape input on the stereo. If you connect to the Phono input jacks, you will have the added response of the RIAA (Recording Industry Association of America) recording standards. Since the frequency response of a needle on a record is far from level, the record industry has changed the response curve to counteract this phenomenon. For a short experiment, after you have adjusted your stereo to a flat response, connect the output to the Phono input and observe the difference in the curves.

I could have used just a DAC and some fancy software to construct the sine wave, but that would have meant added problems writing a machine-language routine. I spent a few extra dollars for the VCO, which eliminated the problems. The VCO is simply a set-and-forget output device. The software can go off and start some other task and the VCO continues outputting the selected sine wave.

Theory of Operation

The I/O section of the board, shown in figure 2, has 24 software-controllable I/O lines. It uses the NEC 8255A-5 I/O chip. This chip was originally designed to work with the 8080 family of micros, but since the 8088 microprocessor uses many of the same I/O methods as the 8080, the 8255A will work with the higher-level chip. The 40-pin 8255A has three 8-bit I/O ports that tie directly into the system bus, with only a few decode logic chips to select the proper I/O address.

The control voltage for the VCO starts out as the output of port A on the 8255 chip and goes to an R-2R ladder network. The network acts as the DAC, "adding" the bit voltages from the 8255 into a single voltage whose value depends on the number of 1s output from the 8255. The signal from the 8255 then goes through a summing operational amplifier (op amp) to change the range of the signal from 0–3.5 V to 8.5–12 V, as measured at test point A of figure 3. This voltage controls the frequency of the VCO.

The heart of the VCO circuit is the ICL8038, which is a precision waveform generator and voltage-controlled oscillator. If you look at a spec sheet for this versatile chip, you will see that it can be used for many types of waveform generation, such as square waves, sine waves, and triangular waves. Basically, the chip needs a timing capacitor connected from pin 10

(continued)

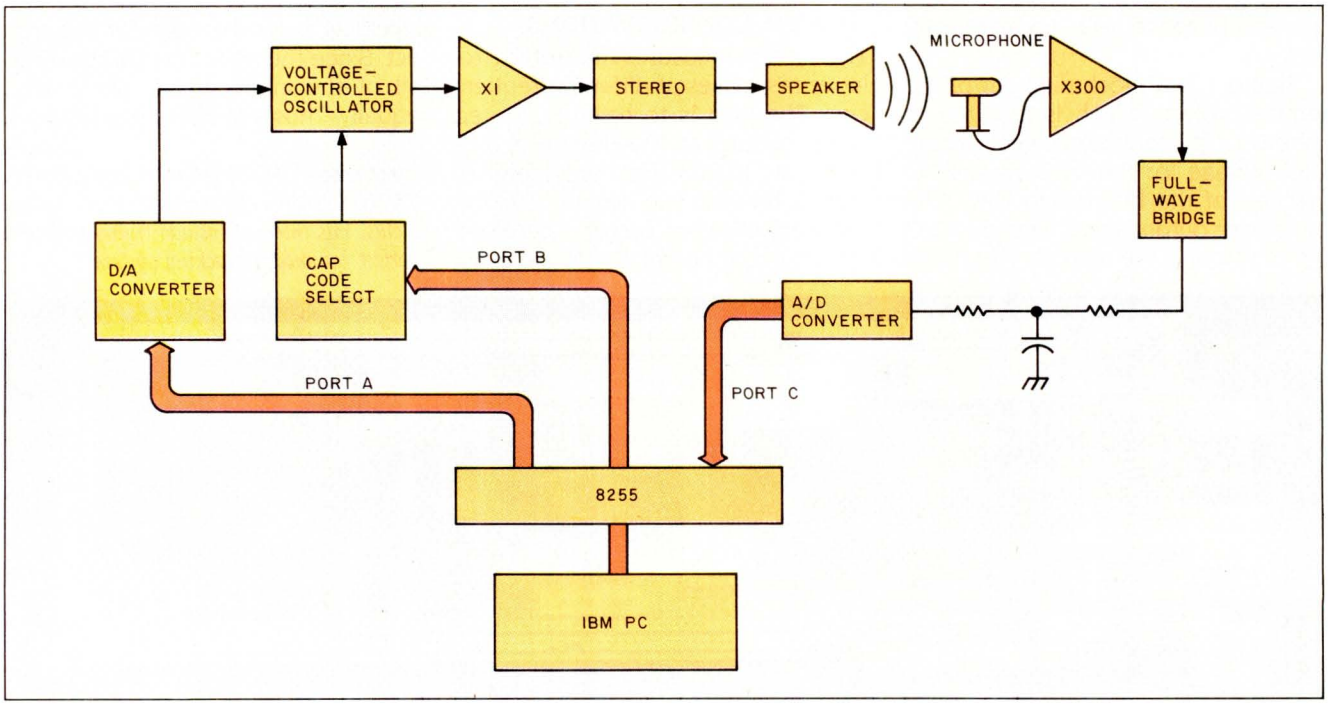

Figure 1: *System block diagram.*

Now there's no excuse to drop dead.

Producing a brochure. Introducing a new product. Moving your entire company across town. Every project has a start date, a completion date, and a date beyond which you absolutely, positively cannot go. The drop dead date. Blow that date and you've got positively, absolutely no excuses.

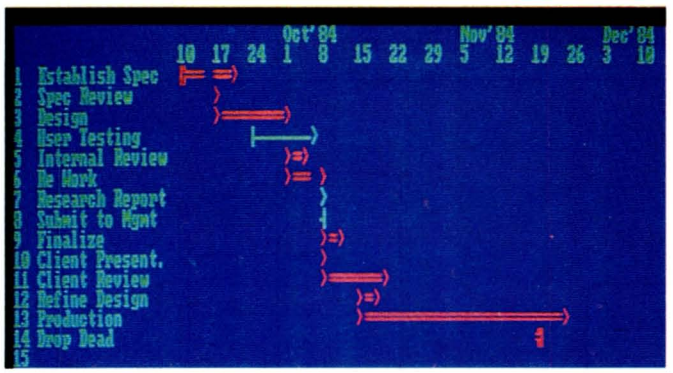

Better to arm yourself with Microsoft® Project, the new software tool for business managers and their IBM® PCs. Microsoft Project tells you which activities are essential to keeping your schedule. And which you can let slide.

Microsoft Project keeps you on a healthy track.

What a spreadsheet does for financial planning, Microsoft Project does for start-to-completion scheduling. Give it your best to worst "what-if" scenarios. It tells you what must be accomplished. By whom. By when. At what cost.

When management needs detailed status or budget reports, it prints them out. In text and bar charts. And it can also send budgeting information to programs like Multiplan,® Microsoft Chart, or Lotus™ 1-2-3.™

Get Microsoft Project. No excuses.

Microsoft Project is easy to use. Especially if you're familiar with electronic spreadsheets. It saves your company time, work, money. Makes you an on-time, on-budget manager. Not to mention it's from Microsoft. We're the people who designed the MS™-DOS operating system that tells the IBM PC how to think. And our BASIC is the language spoken by nine out of ten microcomputers worldwide.

MICROSOFT®
The High Performance Software

For the name of your nearest Microsoft dealer, please call 800-426-9400. In Washington State, Alaska and Hawaii 206-828-8088.

Should you decide you can face another drop dead date without Microsoft Project, tell us where to send the flowers.



Microsoft and Multiplan are registered trademarks and MS is a trademark of Microsoft Corporation. IBM is a registered trademark of International Business Machines Corporation. Lotus and 1-2-3 are trademarks of Lotus Development Corporation.

to ground to select the frequency range, and a control voltage on pin 8 to vary the frequency. The capacitor should range from 1 microfarad (μF) to 500 picofarads (pF). The control voltage must be between 8.5 and 12 V. This gives a 4-to-1 dynamic frequency range for each capacitor.

The timing capacitor is selected by an output through port B. The output transistor of a TTL (transistor-transistor logic) open-collector chip, the 7406 chip in figure 3, controls the capacitors' ground leads. When the output of the chip is OFF, one side of the capacitor is at a high impedance and therefore has no effect on the VCO. When the chip's output is ON, the capacitor is grounded and then can affect the VCO's output. This allows the computer to select the capacitor (or capacitors) needed for the desired frequency range.

The sine-wave output from the VCO has an output impedance of about 1000 ohms. This is too high to drive anything except another op amp. Thus, I've included a simple noninverting buffer amplifier to drive the stereo. By the way, only one channel of the stereo is driven at a time. During testing, the opposite channel's volume should be off.

The full-wave rectifier, shown in figure 4, converts all the negative parts of the signal to positive, because if we did the integration on the unrectified input signal, the average would work out to zero at all frequencies. By inverting the negative half of the signal, we can integrate the resulting waveform to get a voltage level that is proportional to the input power. This is the signal that is fed directly to the ADC in figure 4. Figure 4 also shows the signal before and after the rectifier. The humps of the rectifier's output may not be equal; you can adjust the DC bias on the input amplifier so that they are. But, for this project, a slight difference will not affect the results.

The ADC0804 is an 8-bit microprocessor-compatible ADC. The chip's spec sheet shows many different configurations. I've chosen the free-running mode for this circuit. If you

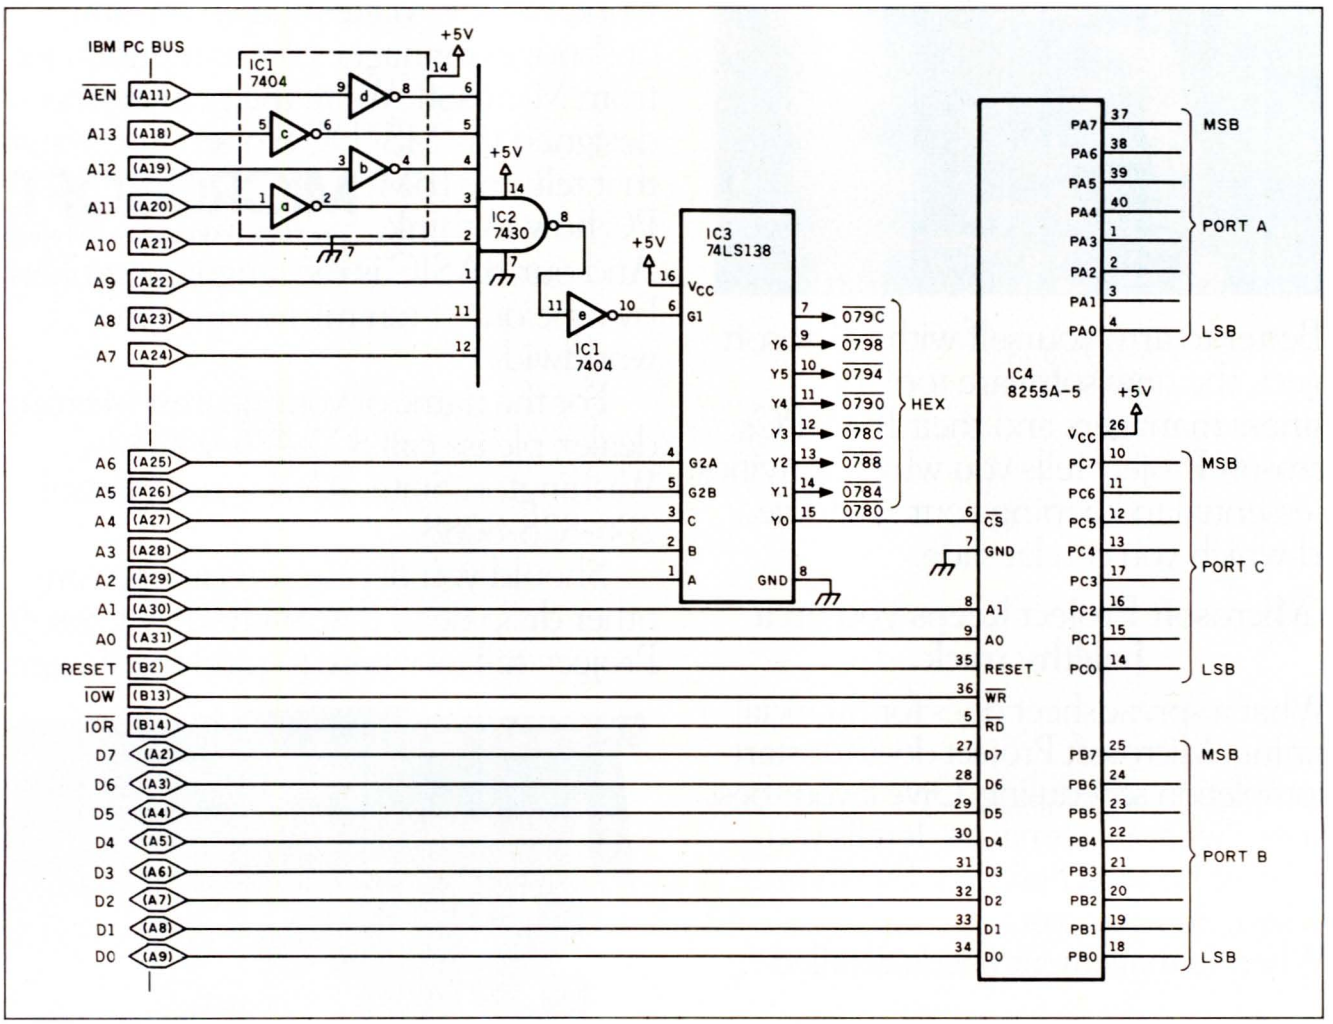

Figure 2: *Diagram of the I/O section of the board.*

are looking at this circuit as a basis for some other project, get a hold of the spec sheet to see how to connect the $V_{in}(+)$, $V_{in}(-)$, and $V_{ref}/2$ signal lines to activate the other modes. I used a resistor divider network with a large capacitor for $V_{ref}/2$. It was good enough for this application, but for other projects it should be connected to a more stable voltage source.

Since the ADC is in a free-running mode the 8255's port C is updated automatically approximately every 200 microseconds (μs). The exact update rate is determined by the value of the 150-pF capacitor and the 15K-byte resistor connected to pin 4 of the ADC0804 chip. On the other hand, if the chip were connected directly to the bus lines, then the software would have to output a "start conversion" command, wait for the chip to convert the frequency, then input the data from the converter. Therefore, in the interest of saving software, the hardware keeps restarting itself when a conversion is completed.

The chip may not start free-running when the power is first applied. To prevent this, connect the last gate from the 7406 chip to the $\overline{WR}$ and $\overline{INTR}$ lines (pins 5 and 3). At the start of the program, the software generates a 1 on the MSB (most significant bit) of port B, and then a 0 on the same line. This pulls the $\overline{WR}$ line low then high again. After the first software initialization, the $\overline{INTR}$ line goes low when the chip finishes converting. This wraps around back to the $\overline{WR}$ line and starts the chip converting the next voltage.

I/O Construction

The construction of the I/O section of the board is straightforward and has no tricky isolation requirements. The best part about this section is that the I/O lines can be accessed directly from BASIC without any special machine-language routines. The update rate in BASIC is about 15 to 25 milliseconds (ms), so if more speed is required, you have to use machine language.

(continued)

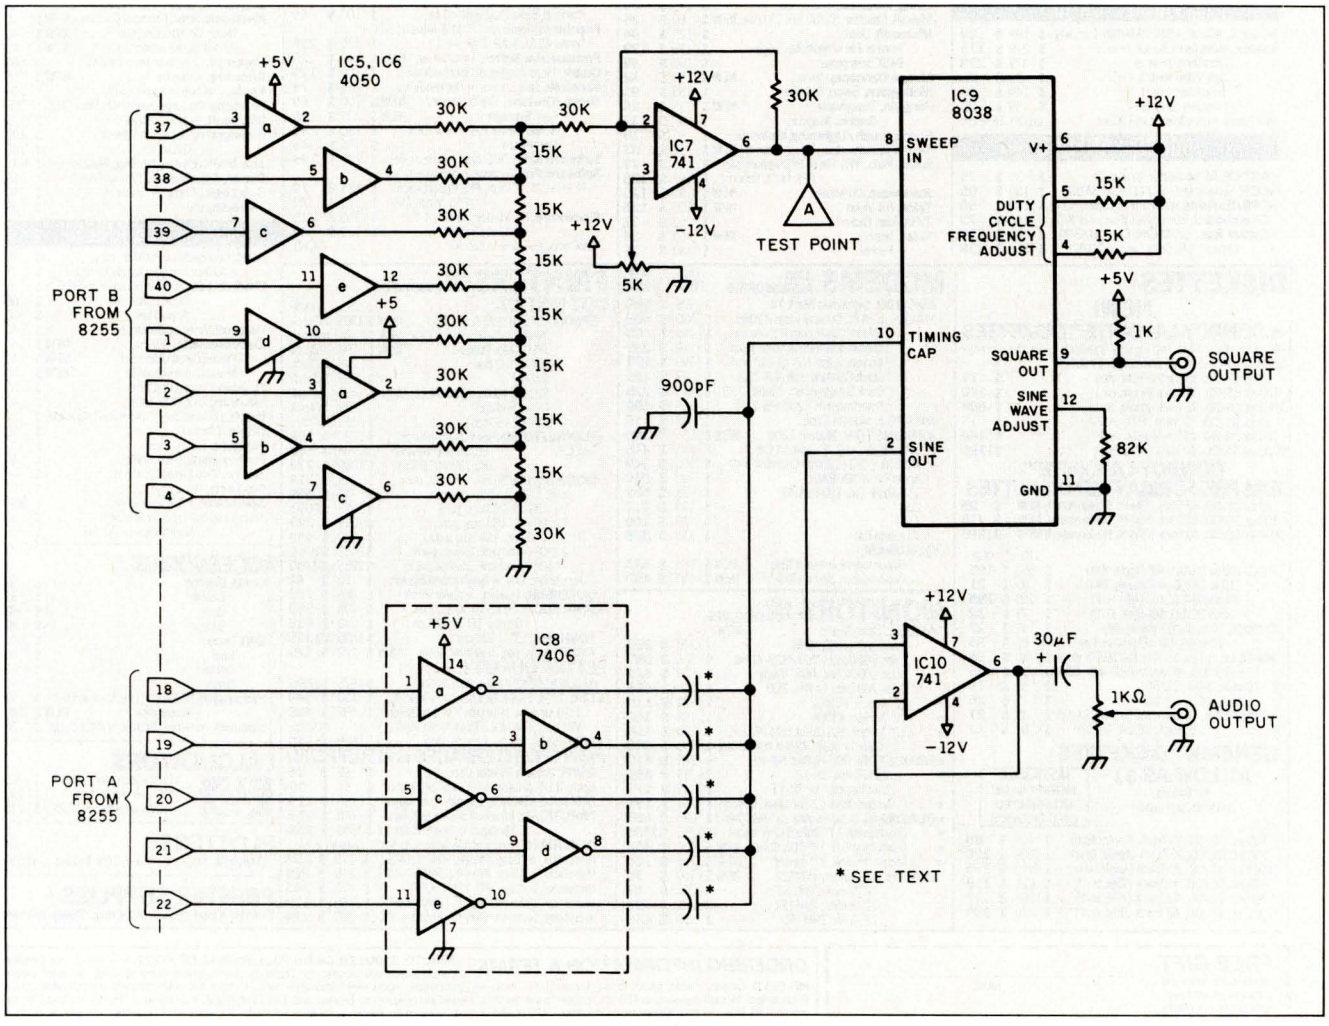

Figure 3: *Voltage-controlled oscillator and driver circuitry.*

OUR AD #B13

THE WORLD'S LARGEST COMPUTER MAIL ORDER FIRM

CONROY

ALL MAIL: Conroy-LaPointe, Inc. 12060 SW Garden Place, Portland, OR 97223 National Order Desk TOLL FREE (800) 547-1289

CASH-n-CARRY COMPUTER STORES, INC.——SAN FRANCISCO, PORTLAND, SEATTLE——SEE BELOW

HARDWARE for your APPLE

SOFTWARE for your APPLE

COMPUTERS

apple

APPLE IIc — CALL

APPLE IIe, STARTER SYSTEM BY APPLE — CALL

LIMITED WARRANTY—100% Parts & Labor for 90 days by us.

DISK DRIVES

		LIST	OUR
*CENTRAL PT., Filer, Utility & Apple DOS		$ 20	$ 15
CONCORDE			
C1214 Dual Drives, ½ Height, flat pack (like Apple Duodisk™)	NEW	$ 589	$ 425
C130 Controller (DOS & ProDOS)	NEW	$ 89	$ 65
μ-SCI MICRO-SCI	*A2, 143K Disk Drive	$ 345	$ 199
	A2 Controller Card	$ 100	$ 79
TEAC	TEAC, T40, Direct Drive, 163K	$ 349	$ 239
	Controller Card by ComX	$ 110	$ 49
1/2 HIGH	TEAC, T80, Double Sided, 326K	$ 449	$ 329
	TEAC, Controller Card	$ 85	$ 59
Rana	Elite 1, 163K, 40 Track	$ 379	$ 239
	Elite 2, 326K, 80 Track	$ 649	$ 389
	Elite 3, 652K, 160 Track	$ 849	$ 499
	Elite Controller	$ 145	$ 89

RAM EXPANSION

*ComX, 80 col. +64K RAM,for IIe, 1 Yr.Wty			$ 199	$ 89
*	RAM Card, 1 Yr. Wty. (II+)	16K	$ 179	$ 39
*Microsoft, RAM Card (II+)		16K	$ 100	$ 69
*Titan/Saturn RAM Card (II+)		32K	$ 249	$ 139
	RAM Card (II+)	64K	$ 425	$ 229
	RAM Card (II+)	128K	$ 599	$ 329
	Software			Call

VIDEO CARDS

*ComX, 80 col. +64K RAM(IIe) 1 yr. wty.	$ 199	$	99
*Videx, VideoTerm 80 col. (+ or e)	$ 279	$	175
* UltraTerm (+ or e)	$ 379	$	229
Soft Video Switch (II+)	$ 35	$	22
Enhancer II (II+)	$ 149	$	95
Function Strip (II+)	$ 39	$	25
We Have Full Videx Line. Call.	*Up to 35% off.*		

MISCELLANEOUS

ASTAR, RF Modulator, to use TV	$ 35	$ 25
*CCS, Serial Interface 7711 (Set BAUD)	$ 150	$ 95
*CPS/Eastside, Wild Card 2 (copier, +or e)	$ 140	$ 99
Chalkboard, Power Pad (Requires Kit)	$ 100	$ 73
Digital Res., CP/M Gold Card (w/64K)	$ 495	$ 359
* Expand 64K Gold Card to 192K	$ 325	$ 239

MISCELLANEOUS

Kensington, System Saver Fan	$ 90	$	65
Key Tronic, KB200 Keyboard (II+)	$ 298	$	219
Koala, Touch Tablet w/Micro Illustrator	$ 125	$	85
Kraft, Joystick (Ap II/II+)	$ 65	$	35
Paddle(Ap II/II+)	$ 50	$	39
M&R, Sup R fan (II+ only)	$ 50	$	30
*Microsoft, Z80 Softcard (+ or e)	$ 345	$	235
* Z80 Softcard Premium(IIe)	$ 395	$	275
*Orange Micro, Grappler Plus (e or +)	$ 149	$	119
16K Buffer Board for Grappler Plus	$ 175	$	119
Buffered Grappler Plus, 16K	$ 239	$	179
Paymar, Lower Case Chip, Rev. 7 (II+)	$ 50	$	19
*PCPI, Applicard, 14 features 6Mhz	$ 375	$	275
RH Electronics, Super Fan II	$ 75	$	59
*Titan/Saturn, Accelerator IIe	$ 599	$	399
Transend/SSM, AIOII, Serial/Para I/F	$ 225	$	169
TG Products, Tracball	$ 40	$	26
Game Paddles or Joystick (II+), ea	$ 40	$	23
Videx, PSIO I/F Card	$ 229	$	145



for your MAC

ATI, MacCoach	NEW	$ 75	$ 49
Bluechip, Millionaire		$ 60	$ 39
Central Point, MAC Tools or Copyll MAC	NEW	$ 40	$ 30
Continental Software, Home Accountant		$ 100	$ 65
Creative Solutions, MacForth Level I	NEW	$ 149	$ 95
Dilithium Press, PC to MAC and Back		$ 100	$ 65
Electronic Arts, Pinball Construction	NEW	$ 40	$ 29
Hayden, Sargon III		$ 50	$ 33
Human Edge, Sales or Mgmt. Edge, each		$ 250	$ 159
Infocom, Full Line in Stock			Call
Kensington, Swivel		$ 25	$ 21
Starter Pak or System Saver, each		$ 90	$ 64
Living Videotext, Think Tank		$ 145	$ 85
Maxell, Diskettes, SS/SD, 3½", IO pak	NEW	$ 60	$ 35
Microsoft, Chart		$ 125	$ 94
Word or File or Multiplan, each		$ 195	$ 129
BASIC Interpreter		$ 150	$ 99
Mirage Concepts, Trivia	NEW	$ 50	$ 32
Monogram, Dollars & $ense		$ 150	$ 95
Penguin, Transylvania	NEW	$ 35	$ 24
Graphics Magician		$ 50	$ 32
Scarborough/Lightning, Mastertype		$ 35	$ 19
Simon & Schuster, Typing Tutor III	NEW	$ 50	$ 33
Softw. Pub., PFS: File or PFS: Report, each		$ 125	$ 79
PFS: File & Report		$ 195	$ 125
Stoneware, DB Master	NEW	$ 195	$ 125
Telos, Full Vision	NEW	$ 195	$ 125
T/Maker, Clickart		$ 50	$ 32
Videx, Vegas	NEW	$ 60	$ 34
FunPak		$ 39	$ 26

BUSINESS & TRAINING

*ALS/Silicon Valley, Word Handler	$ 60	$	39
* List Handler	$ 50	$	33
* Handler Pak, (Word, List Spell)	$ 130	$	85
*Applied Soft Tech., VersaForm	$ 389	$	249
Arktronics, Jane w/Mouse (II+ or IIe)	$ 295	$	195
Jane w/o Mouse (IIc)	$ 179	$	119
Artsci, Magic Window II	$ 150	$	99
*Ashton-Tate, dBase II (Req CP/M 80)	$ 495	$	269
Friday (Requires CP/M 80)	$ 295	$	199
BPI, Job Cost NEW	$ 595	$	375
AR,AP,PR or INV,each	$ 395	$	250
Broderbund, Print Shop	$ 50	$	34
Print Shop Refill NEW	$ 15	$	10
* Bank Street Speller	$ 70	$	45
* Bank Street Writer (specify 11+, e, c)	$ 70	$	45
Continental, GL,AR,AP or PR, each	$ 250	$	165
* Home Accountant	$ 75	$	49
CDEX,for Visicalc, Multiplan, Apple IIe,each	$ 60	$	40
Dow Jones, Market Analyzer	$ 350	$	219
Market Manager	$ 300	$	189
Market Microscope	$ 349	$	219
Fox & Geller, Quickcode or dGraph, ea.	$ 295	$	195
dUtility (for dBase II)	$ 99	$	65
Hayden, Pie Writer (vers. 2.2)	$ 150	$	89
*Howard Soft, Tax Preparer, 1984	$ 250	$	185
Human Edge, Sales Edge or Management	$ 250	$	165
Knoware, Knoware NEW	$ 95	$	64
Living Videotext, ThinkTank NEW	$ 150	$	99
LJK, Letter Perfect w/Mail Merge	$ 150	$	99
Meca, Andrew Tobias' Managing Your Money NEW	$ 200	$	125
Micro Pro, (all require Z80-CP/M Card)			
* WordStar™ w/Starcard & C/PM SPECIAL	$ 495	$	295
* WordStar Professional, 4 Pak SPECIAL	$ 495	$	265
* WordStar™+ Training Manual	$ 350	$	189
* SpellStar™ or MailMerge™, each SPECIAL	$ 99	$	54
* InfoStar w/Starcard & CP/M SPECIAL	$ 495	$	259
Microsoft, Multi-Plan (Apple DOS or CP/M)	$ 195	$	129
*Osborne/ComX, (Disk and Book)(Stat., Bus. & Math)			
Some Common Basic Programs(75 ea.)	$ 100	$	49
Practical Basic Programs(40 ea.)	$ 100	$	49
Peachtree, Requires CP/M & MBasic, 64K Series 40 GL & AR & AP, all 3	$ 395	$	239
Professional Softw., Trivia Fever NEW	$ 40	$	25
*Quark, Word Juggler & Lexicheck (IIe)	$ 189	$	129
Sensible, Sen. Speller or Bookends, ea.	$ 125	$	79
Sierra/On-Line, The Dictionary NEW	$ 100	$	69
Gen. Manager II NEW	$ 230	$	155
ScreenWriter II, 2 Pak w/Dict.	$ 130	$	89
Homeword	$ 50	$	45
Software Arts, TK!Solver (for IIe or IIc)	$ 299	$	199
Software Publishing, (specify + or e)			
PFS:File, PFS:Graph, PFS:Report,each	$ 125	$	79
PFS: Write (IIe)	$ 125	$	79
Stoneware, DB Master Version 4.0	$ 350	$	225
DB Utility Pak I or II	$ 129	$	82
VisiCorp, Full Line In Stock			Call

UTILITY & SYSTEM

		LIST	OUR
Beagle, GPLE or Alpha Plot, each		$ 35	$ 27
Ap. Mechanic, Disquick or Pronto DOS,ea.		$ 30	$ 19
Double Take or Utility City, each		$ 30	$ 19
Typefaces, Tip Disk # 1 or DOS Boss,each		$ 20	$ 15
Central Point, Filer, DOS 3.3 & Util.		$ 20	$ 15
* Copy II Plus (bit copier)		$ 40	$ 30
Einstein, Compiler		$ 129	$ 95
Epson, Graphics Dump		$ 15	$ 9
Funk Software, Sideways	NEW	$ 60	$ 40
Hayes, Terminal Prog.(for Smartmodem)		$ 100	$ 65
*Insoft, GraFORTH II by Paul Lutus		$ 90	$ 65
Microsoft, A.L.D.S.		$ 125	$ 85
Fortran 80		$ 195	$ 129
COMPLETE MICROSOFT LINE IN STOCK			
Omega, Locksmith		$ 100	$ 75
Penguin, Complete Graphics System II		$ 80	$ 54
Graphics Magician		$ 60	$ 41
Phoenix, Zoom Grafix		$ 40	$ 34
Quality, Bag of Tricks		$ 40	$ 29
Terrapin, Logo		$ 99	$ 65
United SWI, ASCII Express-The Pro		$ 130	$ 87
Utilico, Essential Data Duplicator III		$ 80	$ 49

HOME & EDUCATIONAL

Barrons, Study Program for SAT	NEW	$ 90	$ 60
Beagle Bros., Beagle Basic	NEW	$ 35	$ 27
Beagle Graphics	NEW	$ 60	$ 45
Fat Cat	NEW	$ 35	$ 27
Triple Dump	NEW	$ 40	$ 30
Beagle Bag		$ 30	$ 19
Bluechip, Millionaire		$ 60	$ 32
Broderbund, Print Shop	NEW	$ 50	$ 34
CBS, Mastering the SAT		$ 150	$ 95
Chas Goren Learn Bridge		$ 150	$ 95
*Continental, Home Accountant		$ 75	$ 49
Davidson, Speed Reader II		$ 70	$ 45
Word Attack! or Math Blaster! ea.		$ 50	$ 32
Dow Jones, Home Budget		$ 95	$ 69
Edu-Ware, Large Inventory in Stock, CALL		40% off list	
Electronic Arts, Financial Cookbook	NEW	$ 50	$ 33
Music Construction Set	NEW	$ 40	$ 29
Pinball Construction Set	NEW	$ 40	$ 29
Harcourt, Computer Prep for SAT		$ 80	$ 49
Knoware, Knoware	NEW	$ 95	$ 64
Koala, Full line in stock, CALL		35% off list	
Learning Co, Large Inventory in Stock, CALL		35% off list	
Microsoft, Typing Tutor III		$ 25	$ 17
Monogram, Dollars and $ense		$ 100	$ 69
S.A.M.		$ 100	$ 59
Scarborough/Lightning, Mastertype		$ 40	$ 27
Simon & Schuster, Typing Tutor III		$ 50	$ 33
Sub Logic, Flight Simulator II		$ 50	$ 35
Terrapin, Logo		$ 99	$ 65

GAMES

Atari, Centipede or PacMan, ea.		$ 35	$ 28
Donkey Kong or Jungle Hunt, ea.		$ 35	$ 28
Broderbund, Choplifter or Lode Runner,each		$ 35	$ 23
Arcade Machine		$ 60	$ 40
Apple Panic		$ 30	$ 20
Datasoft, Aztec or Zaxxon, each		$ 40	$ 27
Electronic Arts, Sky Fox	NEW	$ 40	$ 29
Pinball Construction Set	NEW	$ 40	$ 29
Music Construction Set	NEW	$ 40	$ 29
Hayden, Sargon III (Chess)		$ 50	$ 34
Infocom, Zork I,II,III, each		$ 40	$ 27
*Insoft, 3 Games,Zarg /Spider Raid /Grapple		$ 82	$ 25
Origin, Ultima III		$ 60	$ 40
Penguin, Transylvania		$ 35	$ 24
Professional, Trivia Fever		$ 40	$ 25
Sierra/On-Line, Ultima II		$ 60	$ 40
Sir-Tech, Wizardry		$ 50	$ 35
Spinnaker, Full line in stock, CALL		35% off list	
Sub Logic, Flight Simulator II		$ 50	$ 35
Night Mission Pinball		$ 35	$ 22

DISKETTES

NEW!

★ CONROY-LAPOINTE™ DISKETTES

We guarantee these top quality products with the Conroy-LaPointe name. 5 YEAR LIMITED WARRANTY.

10 ea, SS/SD, 35 Track (Apple, etc.)	$ 14
100 ea, SS/SD, 35 Track (Apple, etc.)	$ 120
1000 ea, SS/SD, 35 Track (Apple, etc.)	$ 999
10 ea, DS/DD, 40 Track (IBM, H/P)	$ 17
100 ea, DS/DD, 40 Track (IBM, H/P)	$ 140
1000 ea, DS/DD, 40 Track (IBM, H/P)	$1190

CONROY-LAPOINTE™ IBM PRE-FORMATTED DISKETTES

10 ea, DS/DD, 40 Track (IBM-PC Pre-formatted) NEW	$ 25
100 ea, DS/DD, 40 Track (IBM-PC Pre-formatted) NEW	$ 210
1000 ea, DS/DD, 40 Track (IBM-PC Pre-formatted) NEW	$1695

		LIST	OUR
CDC, 100 ea SS/DD, 40T (Apple, IBM)		$ 550	$ 195
10 ea SS/DD, 40T (Apple, IBM)		$ 55	$ 21
100 ea DS/DD, 40T (IBM, H/P)		$ 750	$ 295
10 ea DS/DD, 40T (IBM, H/P)		$ 75	$ 32
DYSAN, 10 ea SS/DD (Apple, etc.)		$ 40	$ 27
10 ea DS/DD 48T(IBM,H/P,etc.)		$ 69	$ 35
MAXELL, 10 ea, SS/DD,3½"(MAC)	NEW	$ 60	$ 35
10 ea,DS/QD, HiDensity(IBM-AT)	NEW	$ 90	$ 55
10 each, MD1, SS/DD		$ 55	$ 19
10 each, MD2, DS/DD		$ 75	$ 26
VERBATIM, 10 each, MD515-01, SS/DD		$ 49	$ 27
10 each, MD34, DS/DD		$ 84	$ 32

GENERIK™ DISKETTES AS LOW AS $1

W/Jackets, no labels, top quality.

NO HASSLE MONEY BACK GUARANTEE ON GENERIK'S

100 ea., SS/SD, 35 Track (Apple, Atari)	$ 415	$ 85
250 ea., SS/SD, 35 Track (Apple, Atari)	$ 1038	$ 229
1000 ea., SS/SD, 35 Track (Apple, Atari)	$ 4150	$ 750
100 ea., DS/DD, 48 Track (IBM, H/P)	$ 626	$ 119
250 ea., DS/DD, 48 Track (IBM, H/P)	$ 1565	$ 319
1000 ea., DS/DD, 48 Track (IBM, H/P)	$ 6260	$ 995

MODEMS AND ACCESSORIES

		LIST PRICE	OUR PRICE
ANCHOR, Signalman Mark XII		$ 399	$ 269
HAYES, IBM-PC Smartmodem 1200B		$ 599	$ 409
IBM-PC Smartcom II Software		$ 149	$ 99
Micromodem IIe w/Smartcom		$ 329	$ 239
Micromodem 100 (S-100 bus)		$ 399	$ 275
Stack Chronograph (RS-232)		$ 249	$ 189
Stack Smartmodem 300(RS-232)		$ 289	$ 225
Smartmodem 1200 (RS-232)		$ 699	$ 489
IBM-PC to Modem Cable		$ 39	$ 19
KENSINGTON, Modem 1200	NEW	$ 595	$ 385
NOVATION, 103/212 Smart Cat		$ 595	$ 415
ACCESS 1-2-3 (1200B+Crosstalk XVI)		$ 595	$ 369
Apple Cat II 300 BAUD		$ 389	$ 249
212 Apple Cat, 1200 BAUD		$ 725	$ 559
Cat		$ 189	$ 139
J-Cat		$ 149	$ 104
212 Auto Cat		$ 695	$ 579
QUADRAM,			
Quadmodem, Internal IBM	NEW	$ 595	$ 425
Quadmodem, Stand alone	NEW	$ 695	$ 495

MONITORS AND ACCESSORIES

AMDEK, Color Series	NEW		
Color 300 Comp./Audio		$ 349	$ 259
Color 500 Comp./VCR/RGB/Audio		$ 525	$ 395
Color 600 Hi Res, RGB /Audio		$ 649	$ 495
Color 700 Ultra Hi Res, RGB		$ 749	$ 595
* 12" Green, #300G		$ 179	$ 119
* 12" Amber, #300A		$ 199	$ 149
* 12" Amber, #310A for IBM-PC		$ 230	$ 159
* 13", Color IV, RGB, 720Hx400V,(IBM)		$ 795	$ 685
*PRINCETON, RGB Hi Res, HX-12		$ 795	$ 499
* RGB Hi Res, SR-12		$ 799	$ 599
Scan Doubler for SR-12		$ 249	$ 179
* Amber, MAX-12 (for Mono Board)		$ 249	$ 199
*QUADRAM, Quadchrome 12" RGBColor		$ 695	$ 495
* Quadscreen 17" 968x512 w/cable		$ 995	$ 595
* Quadchrome II, 14" RGB Color	NEW	$ 650	$ 450
* Amberchrome, 12" Amber	NEW	$ 250	$ 165
ZENITH, 12" Amber, ZVM122	NEW	$ 159	$ 95
12" Green, ZVM123		$ 200	$ 89
12" Amber, ZVM124		$ 200	$ 139
12" Color, ZVM135		$ 599	$ 469

PRINTERS AND ACCESSORIES

DOT MATRIX:

		LIST	OUR
EPSON, LQ1500, 200 & 67 CPS	NEW	$ 1395	InStock
Parallel Interface for LQ1500	NEW	$ 100	InStock
JX80, Color Printer	NEW	$ 799	InStock
RX80, 100 cps		$ 269	InStock
RX80, F/T		$ 369	InStock
RX100, 100 cps, 136 col.,pin&fr.		$ 499	InStock
FX80, 160 cps		$ 699	InStock
FX100, 160 cps		$ 895	InStock
*MANNESMANN Spirit, 80 col 80cps		$ 399	$ 299
TALLY, 160, 80 col. 160cps		$ 798	$ 568
180,132col. 160cps		$ 1098	$ 778
OKIDATA, 82A, 80 col., 120 cps, para.		$ 349	$ 319
83A, 132 col., 120 cps, para.		$ 749	$ 599
84, 136 col, 200 cps, para.		$ 1395	$1095
92, 80 col., 160 cps, para.		$ 599	$ 395
93, 136 col., 160 cps, para.		$ 999	$ 649
2350P, Pacemark, 350cps,para		$ 2695	$2095
2410P, Pacemark, 350cps,para.		$ 2995	$2395
Accessories, Plug 'N Play, Tractors, Okigraph		$ 50	$ 42
QUADRAM, Quadjet, Jet Color Printer		$ 895	$ 795
*STAR MIC., Gemini 10"X, 120cps		$ 499	$ 269
Gemini 15"X, 120cps		$ 549	$ 419
TOSHIBA, 1351, 100 cps		$ 1895	$1375
TTX, TTXpress, port/handheld, 40cps	NEW	$ 229	$ 129

LETTER QUALITY:

AMDEK, 5040, 40 cps, Para. & Ser.		$ 1675	$1395
*TTX, 1014, 13cps,Para.&Ser.,Pin&Fric,3p.		$ 499	$ 349
1114, same as 1014 with T/F, 2 col.&Prop.		$ 599	$ 439
MACpac, Interface TTX to Apple MAC			InStock
*JUKI, 6100, 18cps, Para, 3 pitch		$ 599	$ 449

PRINTER INTERFACES and BUFFERS:

IBM-PC Parallel Printer Cable		$ 60	$ 35
Apple II I/F & Cable for Epson or Gemini		$ 95	$ 59
ORANGE MICRO, Grappler+, for Apple		$ 165	$ 119
PRACTICAL, Microbuff In-Line 64K,Para.		$ 349	$ 259
Microbuff In-Line 64K,Ser.		$ 349	$ 259
QUADRAM, All expandable (w/copy to 512K) (Snap-on to 64K)			
Microfazer, w/Copy, PP, 8K, #MP8 w/PS		$ 179	$ 139
Microfazer, w/Copy, PP, 64K, #MP64 w/PS		$ 299	$ 229
Microfazer, w/Copy, PP, 128K, w/PS		$ 375	$ 345
Microfazer, Snap-on, 8K, PP, Epson w/PS		$ 169	$ 129
Microfazer, Snap-on, 64K, PP, Epson w/PS		$ 299	$ 229

ACCESSORIES

Curtis, Diamond		$ 50	$ 29
Emerald		$ 60	$ 35
Ruby		$ 90	$ 52
Sapphire		$ 80	$ 46
EPD, Lemon		$ 60	$ 38
Lime		$ 90	$ 57
Orange		$ 140	$ 89
Peach		$ 98	$ 63
Kensington, PC Saver™ Line Cord w/filter		$ 50	$ 39
Masterpiece	NEW	$ 140	$ 95
NetworX, Wiretree, 4 outlet, w/filter-surge		$ 70	$ 32

CALCULATORS

hp 41CX, Calculator	NEW!	$ 325	$ 275
41C, Calculator		$ 195	$ 149
41CV, Calculator w/2.2K		$ 275	$ 185

PLOTTERS

AMDEK, Amplot II, 6 pen, 10 x 14 Bed — $1099 $ 899

PRINTER SUPPLIES

Tractor Feed Paper, Ribbons, Daisy Wheels. CALL

FREE GIFT

Use our order forms and get a free gift with your order. Get on our mailing list now for order forms, sales flyers and our newsletter. Our customers are already on the list.

NAME

ADDRESS

CITY # B13 STATE ZIP

Coupon MAIL TO: 12060 SW Garden Place, Portland, OR 97223

ORDERING INFORMATION & TERMS:

MAIL TO: 12060 SW Garden Place, Portland, OR 97223 —— Include your telephone number; double check your figures for Shipping, Insurance and Handling (SIH). All items usually in stock. Prices reflect 3% cash discount, so ADD 3% to above prices for VISA, MasterCard or American Express. Add SIH CHARGES: U.S. Mainland, 3% ($5 minimum) for standard UPS ground; UPS Blue, 6% ($10 minimum); for U.S. Postal, APO or FPO, 12% ($15 minimum). Hawaii —UPS Blue. For Alaska or Canada—UPS in some areas only, all others Postal—call or write, or specify Postal. Foreign orders except Canada, 18% ($25 minimum). Monitors by Postal or to foreign countries, 30% ($50 minimum). Orders received with insufficient SIH charges will be refunded. All prices, availability and specifications subject to errors or change without notice, so call to verify. All goods are new, include warranty and are guaranteed to work. Due to our low prices and our assurance that you will get new, unused products —ALL SALES ARE FINAL. Call before returning goods for repair or replacement.

ORDER DESK HOURS—6AM to 6PM PST, Monday through Friday, Saturday 10 to 4. (6AM here is 9AM in New York.)

EconoRAM™, Fastrak™, and Generik™ are trademarks of ComX Corporation. PC MasterCard™ and SofRAM™ are trademarks of Magnum Computer.

-LA POINTE℠

DEALERS WE BUY EXCESS INVENTORIES

LOW PRICES TO PROFESSIONALS WHO KNOW WHAT THEY WANT AND KNOW HOW TO USE IT!

© 1984 by Conroy-LaPointe, Inc. All Rights Reserved

COMPUTER SYSTEMS
— Call for Details —

256K IBM® - PC

360K Disk Drives by CDC
90 Day Limited Warranty By Us



	LIST	OUR
COMPAQ Portable, 256K, 2 360K Disk Drives	$2995	CALL
SANYO 555-2, 256K, 2 320K Disk Drives	$1499	CALL
TeleVideo PC, 256K, 2 360K Disk Drives, 8088 Chip	$2499	CALL
ZENITH Z150, 256K, 2 320K Disk Drives, MS DOS 2.1, 8088 Chip, 2 S/P	$2799	CALL

for the IBM-PC or XT DRIVES AND ACCESSORIES

	LIST PRICE	OUR PRICE
ALLOY PC-Backup, 16MB, Cartridge Tape System	$2195	$1795
ALLOY PC-STOR, 41MB/17MB Disk&Backup System	$5995	Call
AMDEK Amdisk V, ½ height, internal, 320/360K	$ 658	$ 498
AMDEK Amdisk III, 3" Dual Floppies, 500K	$ 299	$ 249

CONTROL DATA



DISK DRIVES 320K/360K DS/DD

Call For Larger Quantity Prices **$169** FULL HEIGHT
$149 HALF HEIGHT

30 Day Limited Warranty by Factory Authorized Distributor

CDC, ½ Hi Dual Drive Installation Kit	$ 30	$ 16
MAYNARD, Floppy Cont. (w/Para.Port)	$ 300	$ 239
Interface w/Para Port.	$ 300	$ 185
Interface w/Ser. Port.	$ 310	$ 195
QUADRAM Quaddisk Internal Hard Disks w/Controller	IN STOCK — CALL	

10 MEG (XT) DISK KITS

Convert your PC to 10 meg and to be XT compatible with one of the following INTERNAL HARD DISK SYSTEMS. Kits are quality engineered to work with DOS 2.0/2.1. Completely XT compatible. All you need is your DOS manual. Easy to install. Includes 10 Megabyte Hard Disk, Controller Card and Instructions.

ComX Internal 10 meg Hard Disk & I/F	NEW	$ 869
Kamerman Labs Megaflight 100, 10 mbyte Hard Disk Kit	NEW	$ 869
MAYNARD 10 meg Hard Disk Kit, WS1 Sandstar Controller will accept 3 Sandstar modules		$1395 $1150

★ MEANS A BEST BUY

SUPPLY CENTER for IBM-PC or XT

			LIST	OUR
AST	SixPakPlus,64K,S/P/CC+S/W		$ 395	$ 265
	SixPakPlus,256K,S/P/CC+S/W		$ 695	$ 495
	SixPakPlus,384K,S/P/CC+S/W		$ 895	$ 595
	Game Port for SixPak		$ 50	$ 39
	I/O Plus II, S/P/CC		$ 215	$ 150
	I/O Plus II, S/P/CC/G		$ 265	$ 185
	I/O Plus II, 2S/P/CC/G		$ 315	$ 215
	MonoGraphPlus™P/CC(forLotus)		$ 495	$ 375
	PCNet, Starter Kit, PC002		$1490	$ 795
	PCNet, Circuit Board,PC001		$ 695	$ 365
	ComboPlus Products			Call
	MegaPlus Products			Call
★ ComX	EconoRAM™ 256K RAM Card w/Fastrak™RAM disk emulator and spooler software.		$ 495	$ 256
	EconoRAM™ 384K RAM Card		$ 549	$ 350
CURTIS	UNI-I,Monitor tilt & swivel base		$ 50	$ 39
	3 to 9 foot keyboard cable		$ 40	$ 30
	Vertical CPU "System Stand"		$ 25	$ 19
	Monochrome Ext. Cable Pair		$ 50	$ 35
HAUPPAGE (HCW)	8087 Chip	NEW	$ 175	$ 159
	8087 Math Pak	NEW	$ 295	$ 235
	8087 Software Pak	NEW	$ 180	$ 138
	8087 Macro Pak	NEW	$ 245	$ 195
HERCULES	Color Card w/para. Graphics Card, Mono		$ 245	$ 169
			$ 499	$ 329
KENSINGTON, Masterpiece			$ 140	$ 95
	PC Saver™Line Cord w/Filter		$ 50	$ 39
Key Tronic	KB5150, Std. keyboard		$ 209	$ 159
	KB5151, Std. keyboard	NEW	$ 255	$ 199
	KB5151 jr, keyboard	NEW	$ 255	$ 199
Koala	Koala Pad™ w/PC Design Programmer's Guide		$ 150	$ 89
			$ 15	$ 14
MAYNARD SAND STAR SERIES	Multifunction (6) Card, MFC		$ 89	$ 79
	Memory Card no RAM		$ 199	$ 169
	Memory Card 256K		$ 495	$ 395
	HardDisk I/F Module (HDM)		$ 499	$ 399
	HardDisk Cable		$ 30	$ 27
	Para Port Module (PPM)		$ 59	$ 49
	Serial Port Module (SPM)		$ 95	$ 79
	Clock Cal. Module (CCM)		$ 55	$ 48
	Game Adapter Module (GPM)		$ 49	$ 43
	Memory Module "0"K (MMO)		$ 122	$ 99
	Memory Module 256K (MM256)		$ 422	$ 357
★	XT10 meg Hard Disk& I/F WS1		$1395	$1150

			LIST	OUR
MICROSOFT	System Card 256K		$ 625	$ 450
	Mouse		$ 195	$ 139
	PC jr Booster with Mouse	NEW	$ 495	$ 329
	System Card, 64K		$ 395	$ 275
MOUSE SYSTEMS, PC Mouse w/Software			$ 295	$ 189
MAGNUM, PC MasterCard™, 1.536K, Multifunction S/P/G/CC with SofRAM™ software which provides printer spooler, RAM disk & many other functions			$3995	$1995
PARADISE, Modular Graphics Card		NEW	$ 395	$ 285
PLANTRONICS				
	Color Board & Colormagic, 16 color, w/Para		$ 559	$ 395
	Color Board & Draftsman, 16 color, w/Para		$ 559	$ 395
QUADRAM				
★ Quadlink		NEWEST VERSION	$ 680	$ 449
	Quadboard, no RAM, expand to 384K		$ 295	$ 225
	Quadboard 64K, expand to 384K,S/P/CC		$ 395	$ 275
	Quadboard 256K, expand to 384K,S/P/CC		$ 675	$ 525
★	Quadboard, 384K, S/P/CC/G		$ 795	$ 625
	Quadboard II, no RAM, expand to 256K		$ 295	$ 215
	Quadboard II, 64K,expand to 256K,2S/CC		$ 395	$ 265
	Quadboard II, 256K, 2S/CC		$ 595	$ 395
	Quad 512 + 64K plus serial port		$ 325	$ 265
	Quad 512 + 256K plus serial port		$ 550	$ 420
	Quad 512 + 512K plus serial port		$ 895	$ 625
	Quadcolor I, board, 16 colors		$ 295	$ 195
★	Upgrade Quadcolor I to II kit		$ 275	$ 199
	Quadvue, board, Mono/S/P/CC			Call
★	Quadchrome, 12" RGB Color Monitor		$ 795	$ 495
	Quadchrome II, 14" RGB Color	NEW	$ 650	$ 450
	Amberchrome, 12" Amber	NEW	$ 250	$ 165
	Quad 3278	NEW	$1195	$1090
	Quadnet VI	NEW	$2295	$1545
	Quadnet IX	NEW	$1995	$1745
Titan Accelerator PC (8086+ 128K)			$ 995	$ 750
TG PRODUCTS, Joystick			$ 45	$ 29



★ Memory Chip Kit **$35** Call for Larger Quantity Prices
9 Each, 4164, 200 ns
90 Day Warranty by us

★ ComX EconoRAM™ 256K BOARD
$256

★ ComX EconoRAM™ 384K BOARD
$350

With Fastrak™ RAM Disk Emulator and Spooler Software
Fully Compatible, 1 Year Limited Warranty by ComX
Works on DOS 1.1, 2.0 or 2.1
Prices and availability subject to change. Call.

SOFTWARE for IBM-PC or XT

BUSINESS & TRAINING

	APPLIED SOFT., VersaForm	$ 389	$ 249
	ARKTRONICS, Jane w/Mouse	$ 295	$ 195
	ASHTON-TATE, Friday!	$ 295	$ 159
	Framework	$ 695	$ 349
	dBase III	$ 695	$ 369
★	dBase II, (req. PC-DOS & 128K)	$ 495	$ 289
	dBase II to III upgrade	$ 200	$ 119
	dBase II User's Guide (Book)	$ 30	$ 20
	Everyman's DB Primer (Book)	$ 15	$ 12
	ATI, Training Programs—Wide line in stock	$ 75	$ 50
★	BRODERBUND, Bank Street Writer	$ 80	$ 56
	BPI, Gen'l Acctg,AR,AP or PR, each	$ 595	$ 375
	Personal Accounting	$ 195	$ 125
	CDEX, Training for ... (Large Inventory)	$ 70	$ 45
	CHANG LABS, Micro Plan	$ 495	$ 335
★	CONTINENTAL, Ultrafile	$ 195	$ 125
	Tax Advantage	$ 70	$ 45
	Home Accountant Plus	$ 150	$ 89
	FCM (Filing, Cataloging, Mailing)	$ 125	$ 79
	Property Management	$ 495	$ 329
	DILITHIUM PRESS, PC to MAC&Back NEW	$ 100	$ 65
	DOW JONES, Market Analyzer	$ 350	$ 219
	Market Manager	$ 300	$ 189
	Market Microscope	$ 349	$ 219
	FOX & GELLER, Quickcode, dGraph, Grafox or Oz, each	$ 295	$ 195
	dUtil (MSDOS or CP/M86, each)	$ 99	$ 65
	HARVARD, Harvard Project Manager NEW	$ 395	$ 249
	HAYDEN, IBM Pie Writer	$ 200	$ 135
	Pie Speller or Sargon III,each	$ 50	$ 34
	HOWARDSOFT, Tax Preparer, 1984—for 1983 year	$ 295	$ 220
	HUMAN EDGE, Management or Sales, ea.	$ 250	$ 159
	IUS, EasyWriter II System	$ 350	$ 259
	EasySpeller II	$ 100	$ 68
	Business System: GL+AR+AP	$1495	$ 995
	GL,AR,AP,OE or INV, each	$ 595	$ 375
★	INSOFT, GraFORTH (animated 3D graphics)	$ 125	$ 95
★	KENSINGTON, Easy Link Mail Mngr. NEW	$ 95	$ 65
	KNOWARE, Knoware (reg. graphics) NEW	$ 95	$ 64
	LIFETREE, Volkswriter 1.2	$ 195	$ 130
	Volkswriter Deluxe	$ 395	$ 189
★	LOTUS, 1-2-3	$ 495	$ 309
	Symphony NEW	$ 695	$ 465
	QUE, Using 1-2-3 (Book)	$ 15	$ 12
	LIVING VIDEOTEXT, Think Tank NEW	$ 195	$ 115
	MDBS, Knowledgeman NEW	$ 500	$ 300
	MECA, Andrew Tobias' Managing Your Money NEW	$ 195	$ 125
	MICROPRO, WordStar®	$ 350	$ 189
	WordStar Professional Plus	$ 695	$ 365
★	WordStar Professional, 4 Pak	$ 495	$ 265
	WordStar 2000	$ 495	$ 295

BUSINESS & TRAINING

	MICROPRO, MailMerge™	$ 99	$ 54
	StarIndex™	$ 195	$ 109
	ProOptions, SS/MM/SI	$ 195	$ 105
	InfoStar™+	$ 495	$ 259
★	MICRORIM, R:base, Series 4000	$ 495	$ 285
	Extended Report Writer	$ 150	$ 89
	R:base Clout	$ 195	$ 125
	MICROSOFT, Chart or Project,each	$ 250	$ 165
	Multiplan	$ 195	$ 129
	Word	$ 375	$ 235
	Word with Mouse	$ 475	$ 289
	MONOGRAM, Dollars & $ense	$ 165	$ 110
	MULTIMATE, Multimate	$ 495	$ 295
	OPEN SYS, GL,AR,AP,PR,INV or PO,each	$ 695	$ 429
★	OSBORNE/COMX, (Book & Business, Statistics & Math Programs on DS/DD Disks)		
	Some Common Basic Programs(70 ea.)	$ 100	$ 69
	Practical Basic Programs (40 each)	$ 100	$ 69
	PEACHTREE, Peach Pak (GL,AR&AP)	$ 395	$ 239
	Peach Text 5000	$ 395	$ 239
	PERFECT, Perfect Writer	$ 349	$ 219
	QUADRAM, Tax Strategy NEW	$ 395	$ 295
	Investment Strategy NEW	$ 395	$ 295
	SOFTWARE PUBLISHING, PFS:Report	$ 125	$ 79
	PFS:File,PFS:Write,PFS:Graph	$ 140	$ 89
	PFS:Proof	$ 95	$ 59
	SORCIM, SuperCalc 3	$ 395	$ 245
	SSI/SATELLITE, WordPerfect	$ 495	$ 275
	Personal WordPerfect	$ 195	$ 149
	STONEWARE, Advanced D.B. Master	$ 595	$ 395
	SUMMA, Trader's Forecast NEW	$ 250	$ 159
	Trader's Data Manager NEW	$ 200	$ 129
	Trader's Accountant NEW	$ 350	$ 219
	Complete System NEW	$ 700	$ 445
	T/MAKER, T/Maker III	$ 275	$ 169
	THOUGHTWARE, Mgt. Series	33% off list	
	VISICORP, VisiCalc 4	$ 250	$ 159
	Full Line In Stock		Call

UTILITY & SYSTEM

	BORLAND, Turbo Pascal NEW	$ 50	$ 35
	Sidekick NEW	$ 50	$ 35
★	CENTRAL POINT, Copy II PC NEW	$ 40	$ 30
★	COMX, Fastrak™, RAM/Disk emulator and printer spooler program. Works on any PC/DOS version or RAMCard. Menu Driven	$ 100	$ 59
	DIGITAL RES., CP/M-86™ (PC/XT)	$ 80	$ 39
	Concurrent CP/M-86™ w/windows	$ 835	$ 225
	CBASIC 86™ (CP/M86)	$ 200	$ 135
	CBASIC Compiler (CP/M-86 or PCDOS,ea)	$ 600	$ 395
	PL/1 (PC DOS)	$ 750	$ 525

UTILITY & SYSTEM

	DIGITAL RES., PL/1 (CP/M-86)	$ 750	$ 479
	Speed Prog. Pkg. (CP/M-86)	$ 200	$ 135
	DR LOGO-86 (CP/M86)	$ 100	$ 69
	FUNK SOFTWARE, Sideways NEW	$ 60	$ 40
	HAYES, Smartcom II (Data Com.)	$ 149	$ 99
★	INSOFT, GraFORTH(animated 3D graph)	$ 125	$ 95
	LIFEBOAT, Lattice C. NEW	$ 500	$ 295
	MICROSTUF, Crosstalk XVI(Data Com.)	$ 195	$ 129
	MICROSOFT, muMath/muSimp	$ 300	$ 199
	Business BASIC Compiler	$ 600	$ 399
	Pascal Compiler	$ 300	$ 199
	C Compiler	$ 500	$ 329
	BASIC Compiler	$ 395	$ 259
	FORTRAN Compiler	$ 350	$ 229
	COBOL Compiler	$ 700	$ 459
	NORTON, Utilities 2.0, 14 programs	$ 80	$ 54
	ROSESOFT, Prokey	$ 130	$ 87

HOME & EDUCATIONAL

★	ARMONK, Executive Suite	$ 40	$ 27
	BLUE CHIP, Millionaire or Tycoon,each	$ 60	$ 39
	BPI SYSTEMS, Personal Accounting	$ 99	$ 63
	CBS, Mastering the SAT	$ 150	$ 95
	Chas. Goren Learn Bridge NEW	$ 80	$ 51
	COMPREHEN., PC Tutor(1.1 or 2.0, ea.)	$ 60	$ 40
	CONTINENTAL, Home Accountant Plus	$ 150	$ 89
	DAVIDSON, The Speed Reader II	$ 75	$ 45
	Word Attack! or Mathblaster!, each	$ 50	$ 32
	DOW JONES, Home Budget	$ 139	$ 89
	HARCOURT, Computer SAT	$ 80	$ 49
	MICROSOFT, Flight Simulator II	$ 50	$ 33
	MONOGRAM, Dollars & Sense	$ 165	$ 110
	PBL CORP., Personal Investor	$ 145	$ 99
	SCARBOROUGH, MasterType	$ 50	$ 32
	SIMON & SCHUSTER, TypingTutorII	$ 50	$ 33

GAMES

	ATARI, Centipede, PacMan or Donkey,each	$ 35	$ 28
★	BRODERBUND, Apple Panic (Color)	$ 30	$ 19
	Lode Runner or Serpentine, each	$ 35	$ 23
	ELECTRONIC ARTS, Full Line in Stock		CALL
	EPYX, Auto Sim or Temple of Apshai	$ 40	$ 27
	HAYDEN, Sargon III (Chess)	$ 50	$ 34
	INFOCOM, Deadline or Suspended, ea.	$ 50	$ 33
	Zork I or Zork II or Zork III, each	$ 40	$ 27
★	INSOFT, Mystrix,Wordtrix or Quotrix,ea	$ 35	$ 25
	MICROSOFT, Flight Simulator II	$ 50	$ 33
	ORIGIN, Ultima II	$ 60	$ 39
	SPINNAKER, Snooper Troops (1 or 2)	$ 45	$ 29
	Story Machine or Face Maker	$ 35	$ 24
	SUB LOGIC, Night Mission Pinball	$ 40	$ 27

CASH-n-CARRY COMPUTER STORES, INC.
Over-the-counter sales only. Open Monday through Saturday, 10:00 to 6:00.
SAN FRANCISCO — NEW STORE! 550 Washington Street (at Montgomery, opposite the Pyramid). Interstate 80, to Highway 480, take Washington Street Exit. **CALL (415) 982-6212.**
PORTLAND, OREGON — At Park 217, Tigard at intersection of Highways 217 and 99W. **CALL (503) 620-5595.**
SEATTLE, WASHINGTON — 3540 128th Ave. SE, Bellevue, WA 98006. In Loehmann's Plaza near Factoria Square, South East of Highway 405 & 90 and at South East 36th and Richards. **CALL 641-4736.**

OUR AD #B13

MEMBER DIRECT MARKETING ASSOCIATION

OUR REFERENCES:
We have been in computers and electronics since 1958, a computer dealer since 1978 and in computer mail order since 1980. Banks: 1st Interstate Bank, (503) 643-4678. We belong to the Chamber of Commerce (503) 228-9411 and Direct Marketing Association, or call Dunn and Bradstreet if you are a subscriber.

MasterCard VISA AMERICAN EXPRESS Card

NO SALES TAX

National Order Desk **TOLL FREE (800) 547-1289**
OREGON ONLY (800) 451-5151
Foreign & Portland (503) 620-9877

HOT LINE
Information on your order
(503) 620-9878
WEEKDAYS ONLY

ORDER DESK HOURS
Mon-Fri—6AM to 6PM PST
Saturday—10AM to 4PM PST
(6AM here is 9AM in New York)

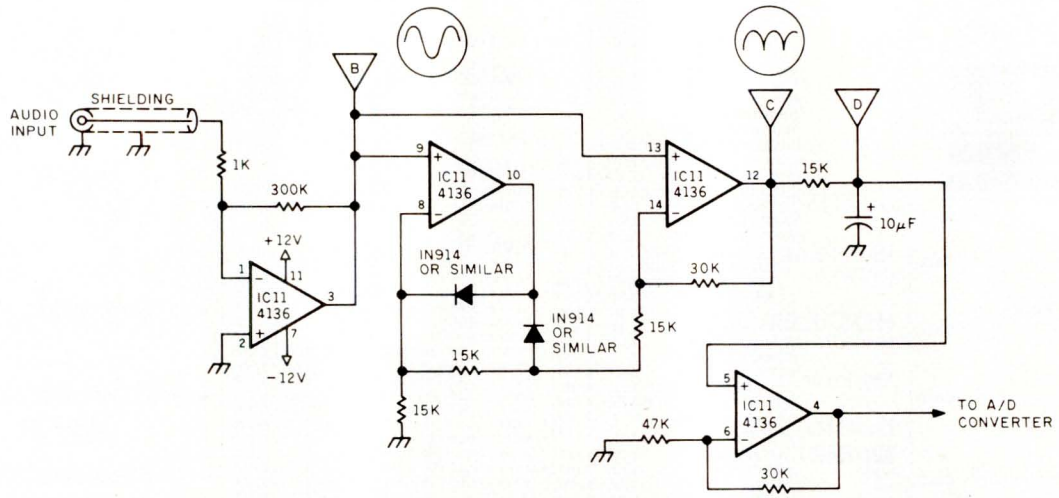

(4a)

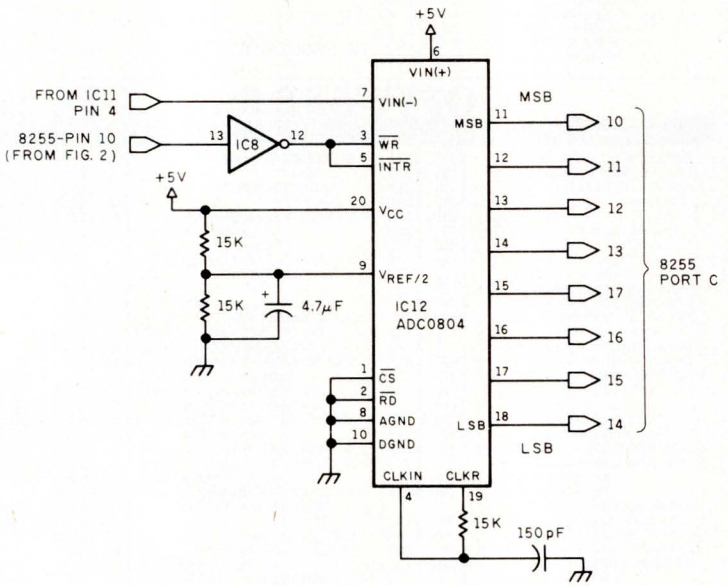

(4b)

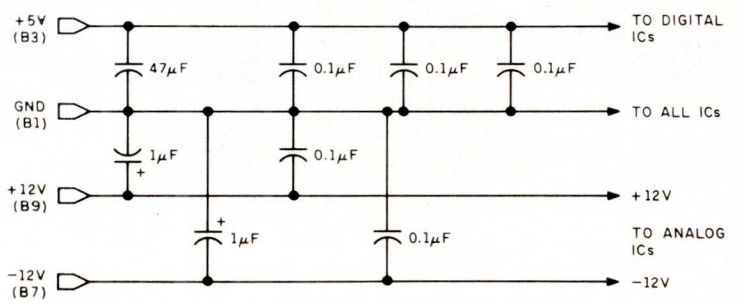

(4c)

Figure 4: *Audio input and full-wave rectifier (a), ADC (b), and power connections (c).*

Inquiry 242 ⟶

YOUR COMMODORE 64™ CAN NOW USE STANDARD APPLE™ II+ HARDWARE AND SOFTWARE



WITH THIS

At Mimic we believe that you and your computer should dictate the choices of hardware and software you can use.

The Spartan™ was developed to allow you to choose the hardware and software that best suits your needs.

Our goal in designing the Spartan™ was simple. To take what you already have and give you more.

Mimic Systems is proud to give you the Spartan™ The Apple™ II+ emulator for the Commodore 64™

Spartan™ Suggested Retail Prices:

The Spartan™ (includes BUSS, CPU, and DOS cards) $599.00
BUSS card $299.00
CPU card (requires BUSS card) $199.00
DOS card (requires BUSS and CPU card) $199.00

(All prices in U.S. Funds. Freight not included.)
American Express, Visa and MasterCard accepted.

Commodore 64 and Commodore logo are trademarks of Commodore Electronics Ltd. and/or Commodore Business Machines, Inc. Apple® II+ is a trademark of Apple Computer, Inc. Spartan™ is a trademark of Mimic Systems Inc., and has no association with Commodore Electronics or Apple Computer, Inc. The Spartan is manufactured by Mimic Systems Inc. under license granted by ATG Electronics Inc. of Victoria, B.C., Canada.

MIMIC

FOR INFORMATION WRITE:

MIMIC SYSTEMS INC.
1112 FORT ST., FL. 6H
VICTORIA, B.C.
CANADA V8V 4V2

To Order Call:
1-800-MODULAR
(663-8527)

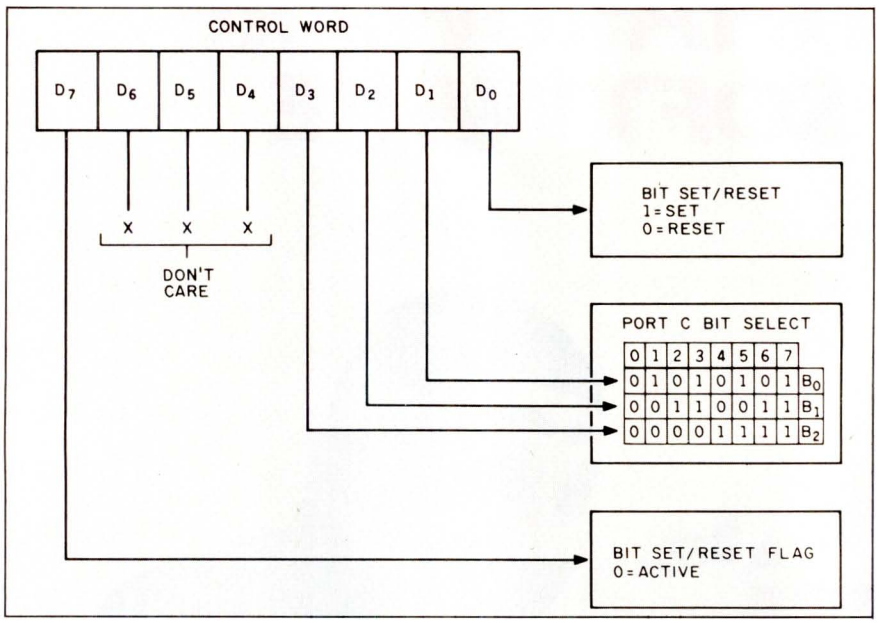

Figure 5: *Setting the port C bits of the 8255A using the control word.*

Table 1: *I/O addresses.*

Pin number	Name	I/O address (hex)
15	Y0	0780–0783
14	Y1	0784–0787
13	Y2	0788–078B
12	Y3	078C–078F
11	Y4	0790–0793
10	Y5	0794–0797
9	Y6	0798–079B
7	Y7	079C–079F

Table 2: *Control words that control the data direction of the 8255A's ports. Bits 2, 5, and 6 are 0. Bit 7 is 1.*

D_4	D_3	D_1	D_0	PORT A	PORT C (UPPER)	PORT B	PORT C (LOWER)
0	0	0	0	OUTPUT	OUTPUT	OUTPUT	OUTPUT
0	0	0	1	OUTPUT	OUTPUT	OUTPUT	INPUT
0	0	1	0	OUTPUT	OUTPUT	INPUT	OUTPUT
0	0	1	1	OUTPUT	OUTPUT	INPUT	INPUT
0	1	0	0	OUTPUT	INPUT	OUTPUT	OUTPUT
0	1	0	1	OUTPUT	INPUT	OUTPUT	INPUT
0	1	1	0	OUTPUT	INPUT	INPUT	OUTPUT
0	1	1	1	OUTPUT	INPUT	INPUT	INPUT
1	0	0	0	INPUT	OUTPUT	OUTPUT	OUTPUT
1	0	0	1	INPUT	OUTPUT	OUTPUT	INPUT
1	0	1	0	INPUT	OUTPUT	INPUT	OUTPUT
1	0	1	1	INPUT	OUTPUT	INPUT	INPUT
1	1	0	0	INPUT	INPUT	OUTPUT	OUTPUT
1	1	0	1	INPUT	INPUT	OUTPUT	INPUT
1	1	1	0	INPUT	INPUT	INPUT	OUTPUT
1	1	1	1	INPUT	INPUT	INPUT	INPUT

The 74LS138 provides eight strobe lines. Only one of these is used for the 8255. The other seven are spare and can be connected to more 8255As for even more I/O lines. These strobe lines are normally high and go low for approximately 1 μs. The I/O address for the 8255A is 0780 hexadecimal (1920 decimal). Table 1 gives the I/O addresses for the eight strobe lines from the 74LS138.

The decode logic does not use lines A14 and A15. That means that if any other part of the IBM PC uses an I/O address higher than 3FFF hexadecimal, there could be an I/O conflict. Most of the boards built to be compatible with the IBM PC and the computer itself use I/O addresses of 03FF hexadecimal or less. This puts these I/O addresses safely above the system I/O.

There are three basic software-selectable operation modes for the 8255A: Mode 0 (basic input/output), Mode 1 (strobed input/output), and Mode 2 (bidirectional bus). The chip has three separate data ports: A, B, and C. The mode selected for ports A and B can be different, but port C is configured to follow what is selected by A and B. The upper half of port C is configured with port A and the lower half of port C is configured with port B. This mixture of mode selection along with the I/O modes for each of the ports may seem confusing at first, but the following review of the main I/O operations will clear up the matter.

Port C may be written to differently from the other ports; that is, individual bits may be changed in the port without affecting the other bits of the port. The bit pattern required to either set or reset a single bit is shown in figure 5. To set bit 5 in port C to a 1, output an 11 (decimal) to the control-word register. To make bit 2 a 0, output a 4 to the control-word register.

There are four internal registers in the 8255A chip. The first three are for the three data ports and the fourth one is the control-word register that I mentioned earlier. In the configura-

(continued)

The PCturbo 186™ takes a good computer and makes it the **BEST!**

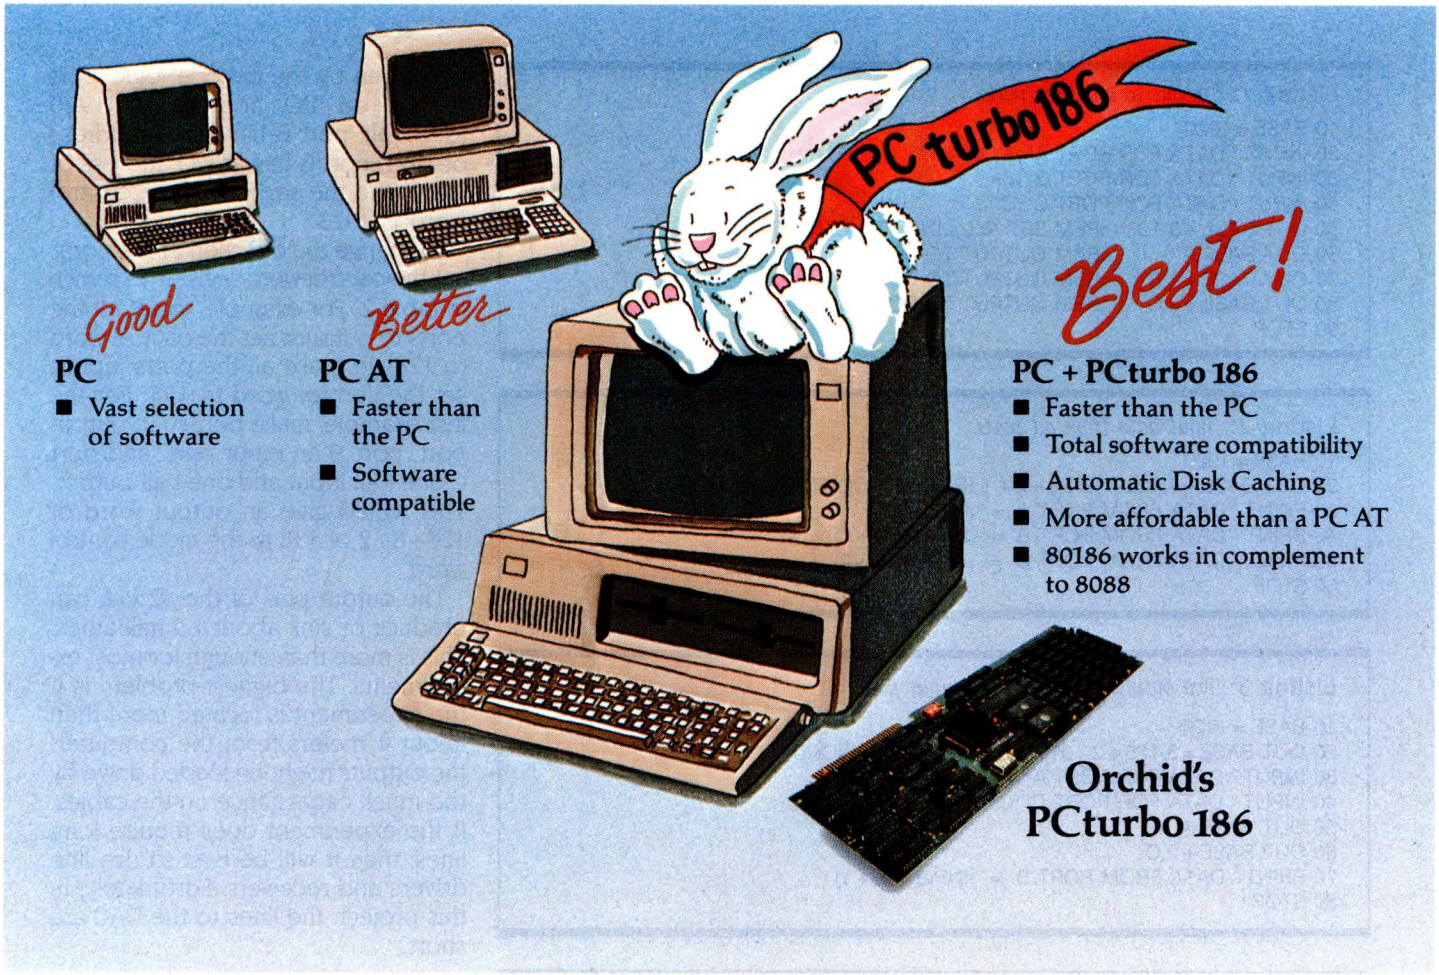

First the standard was the IBM™ PC. Then it became the IBM PC AT with it's high processing speed. For those, however, who have an IBM PC and need PC AT-like performance, Orchid Technology will put you out in front again with a new standard—the PCturbo 186. The PCturbo out performs the PC AT in speed with fast disk access, and unmatched performance while providing **complete software compatibility.**

Best of all, PCturbo allows you to protect your existing hardware and software investment without the cost of replacing your existing PC or the need to learn to use a new computer and its software. **Simply install the PCturbo adapter board and Orchid's "Productivity Software" and your PC becomes a powerful turbo-driven computer.**

The PCturbo 186 is actually a second computer within your PC. Powered by the advanced Intel 80186 processor, the PCturbo is transparent to your favorite programs like Lotus 1-2-3,™ Symphony,™ dBase II or III,™ Framework™ and Multimate,™ running them at turbo speeds. **So, with PCturbo, your PC looks and acts the same as before; it just runs faster.**

While the PCturbo is speeding up your processing power the 8088 microprocessor in your PC takes care of the I/O functions. Most importantly, complete compatibility is assured since the PCturbo allows you to switch back and forth between Turbo Mode and PC Mode with a simple command.

Since PCturbo boosts the processing speed of your PC, there's no more waiting to recalculate spreadsheets or to retrieve data. With the unique built-in features like automatic disk caching, electronic RAM disks and print spooling, you can get even more done in less time. **Now isn't that why you bought a PC in the first place?**

TECHNICAL DETAILS:

Hardware

- Single slot plug-in board with high-speed 16-bit processor (80186).
- Up to 640K memory expansion for a maximum of 1.28 Megabytes total memory.
- Simple "one-step" installation.

Software

- Runs IBM PC-DOS 2.x/3.x on either the IBM PC/XT and versions of most compatibles.
- Provides high speed disk caching, RAM disk and print spooling.
- Standard PC (8088) operation for total compatibility.

Write or call for more information today.

ORCHID

ORCHID TECHNOLOGY
47790 Westinghouse Drive
Fremont, CA 94539
(415) 490-8586 Telex: 709289

PCturbo 186 is a trademark of Orchid Technology. IBM is a registered trademark of International Business Machines Corporation. Lotus 1-2-3 and Symphony are trademarks of Lotus Development Corporation. dBase II, dBase III, and Framework are trademarks of Ashton-Tate. Multimate is a trademark of Multimate International.

Listing 1: *Output to all three ports.*

```
10 BASE = 1920
20 INPUT "DATA FOR PORT A";A
30 INPUT "DATA FOR PORT B";B
40 INPUT "DATA FOR PORT C";C
50 OUT BASE + 3,128   :REM SET ALL LINES TO OUTPUT
60 OUT BASE,A         :REM OUTPUT TO PORT A.
70 OUT BASE + 1,B     :REM OUTPUT TO PORT B.
80 OUT BASE + 2,C     :REM OUTPUT TO PORT C.
90 STOP
```

Listing 2: *Input data from all ports.*

```
10 BASE = 1920
20 OUT BASE + 3,128 + 16 + 8 + 2 + 1 :REM SET CONTROL WORD.
30 PRINT "DATA FROM PORT A = ";INP(BASE)
40 PRINT "DATA FROM PORT B = ";INP(BASE + 1)
50 PRINT "DATA FROM PORT C = ";INP(BASE + 2)
60 STOP
```

Listing 3: *Two output ports and one input port.*

```
10 BASE = 1920
20 OUT BASE = 3,128 + 2   :REM SET CONTROL WORD
30 INPUT "DATA FOR PORT A";A
40 INPUT "DATA FOR PORT C";C
50 OUT BASE,A
60 OUT BASE + 2,C
70 PRINT "DATA FROM PORT B = ";INP(BASE + 1)
80 STOP
```

Listing 4: *Machine-language routine to test the 8255A.*

```
0500:0000 B080      MOV     AL,80
0500:0002 BA8307    MOV     DX,0783
0500:0005 EE        OUTB    DX
0500:0006 90        NOP
0500:0007 BA8007    MOV     DX,0780
0500:000A B0FF      MOV     AL,FF
0500:000C EE        OUTB    DX
0500:000D B000      MOV     AL,00
0500:000F EE        OUTB    DX
0500:0010 EBF8      JMPS    000A
```

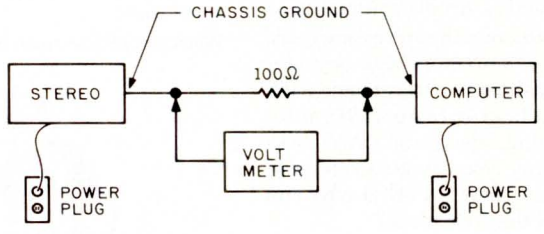

Figure 6: *Potential ground problem test configuration.*

tion given by the decode logic, port A has an I/O address of 1920 (decimal), port B has an I/O address of 1921, port C has an I/O address of 1922, and the address of the control word is 1923.

To change the direction of the ports, set the control-word register as shown in table 2. For example, to set all the ports to outputs, set the control word to 128. To make all the ports inputs, set the control word to 155. For the last example, make port A an output port, port B an input port, and port C one-half input and one-half output. This would give an output word of 128+8+2 or 138 to the mode control word.

The output pins of the 8255A can produce or sink about 1.5 milliamps. This is more than enough for most experiments. The biggest problem is if the experiment is located more than about 4 meters from the computer; the outputs might be loaded down by too much capacitance on the cables. If the experiment does require long lines, then it will be best to use line drivers and receivers. Fortunately, in this project, the lines to the DAC are short.

Software Examples

The three BASIC routines in listings 1, 2, and 3 show how to control the data on the I/O ports by using the INP and OUT commands. The first example asks the operator for three data words and then outputs them to the three ports. When the program is finished, the data is latched on the output pins. The second example makes all three ports into input ports and displays the data present on the I/O lines. The third example is just a mixture of the two. Data is output to ports A and C, and input from port B.

The machine-language routine in listing 4 produces a pulsed pattern on all pins of port A. This is useful in checking out the board during construction. Simply connect an oscilloscope probe to any of the port A pins and observe the square-wave output. The routine was produced with the DEBUG utility. Once the routine begins, the only way to stop the pro-

gram is to hit the reset switch. This example also shows the machine-language instructions needed to control the 8255A.

Before you go any further, I want to warn you about the possibility of a dangerous voltage difference between the ground of your stereo and your computer. First, connect the chassis of the two machines with a 100-ohm resistor. This is shown in figure 6. If the resistor does not get hot, then the stereo and the computer power supplies are not exchanging angry words over which side of the power line is ground. If you take a voltmeter and measure the difference between the two grounds without the resistor, you could get a 60-V reading. That is because the two power supplies are floating with respect to earth ground. The 100-ohm resistor will allow the two floating grounds to adjust themselves to each other. When the resistor is used, there should be less than a 10-V potential between the two systems. If there are more than 10 V, then you have a grounding problem that must be fixed before anything else can be done. Maybe you need to flip the stereo's power cord. But do not connect the two if there is a grounding problem.

DAC, VCO, and ADC Construction

Since we want to keep some of the noise out of the system, keep the leads as short as possible. I used a mixture of wire-wrap and soldered printed-circuit board material, but you can use whatever is best for you. I built the system in sections so I could test each separately. This made it easier to find errors without subjecting the computer to my hacking. Remember to make some test points on the boards. This will help in both calibration and in testing.

DAC Calibration and Testing

The first step in calibrating the system is to adjust the 5k-ohm potentiometer (pot) on the output amplifier of the DAC. This pot adjusts the offset of the DAC to get it into the 8.5- to 12-V range. First, set all the inputs to the 4050 chips to 0. Do this by either outputting a 0 to port A or, if the DAC is not connected to the 8255 yet, by connecting them to ground with clip leads. Then measure the output at point A of the drawing. Adjust the level of the 5k pot until the voltage is 8.4. Now bring all the inputs to the 4050s to 1. The voltage at point A should be close to 12 V. If not, go back and check for errors.

VCO Calibration and Testing

The calibration of the output section now depends on selecting the proper values for the five capacitors used on the 8038 chip. Try to find the following five capacitors either at a store or in your junk box: 0.33 μF, 0.1 μF, 0.033 μF, 0.01 μF, and 3300 μF. You might have to connect capacitors in series or parallel to get these values. But anything close will do. As you experiment with the selection, you might be able to expand the range beyond the 20- to 20,000-Hz limits. By selecting the right capacitor, the system will work at up to 400,000 Hz.

There are 32 different combinations of capacitors. Take the five capacitors you have collected and put them in the circuit as shown in the drawing. Don't worry about which goes where, because it doesn't make a difference.

Now comes the problem of measuring the frequency. If you have access to an audio-frequency counter, just connect the counter to the square-wave output line of the VCO. Most people will probably have to use the computer to help tune the system. As you know, IBM BASIC has the SOUND command. This command will produce a tone at a particular frequency for a given length of time. The built-in speaker should generate a tone loud enough to be heard.

If you have an oscilloscope, then you can use the Lissajous figure technique to determine the frequency of the system's output. For this, first place the output from the VCO in the *x*-axis input and then connect the wire going from the computer's speaker to the *y*-axis input. Adjust the frequency from the computer's speaker with

(*continued*)

Inquiry 225

Centronics
Parallel Printer Switch

MFJ-1249
$99.95



With the push of a button-Share a parallel printer between two computers that have parallel printer ports. **Eliminate** the problems and fustrations of plugging and unplugging cables. **Save** the cost of a second printer. Features three female Centronics connectors on back panel. 10½x2x6 inches.

Printer Switch
for IBM PC Computer

MFJ-1248
$99.95
2 inputs, 1 output. Push button switching. Has same type connectors as PC parallel printer port. 8x2x6 in.

Multi-function
RS-232 Switches

MFJ-1240
$79.95
Choice of 8 models



Multi-function RS-232 transfer switches let you switch your computer among printers, modems, terminals, any RS-232 peripherals; monitor data/line failure, protect data lines from surges, and use as null modem for less cost than a switch alone **Switches 10 lines**)2, 3, 4, 5, 6, 8, 11, 15, 17, 20). LED data/line indicators monitor lines 2, 3, 4, 5, 6, 8, 20. Metal oxide varistors protect data lines 2, 3 from voltage spikes and surges. Push button reverses transmit-receive lines (2, 3). PC board eliminates wiring, crosstalk, line interference. Connects any one input to any one output.

Model	Price	In	Out	Model	Price	In	Out
MFJ-1240	$79.95	1	2	MFJ-1244	$139.95	3	3
MFJ-1241	$99.95	2	2	MFJ-1245	$169.95	3	5
MFJ-1242	$119.95	2	3	MFJ-1246	$199.95	5	5
MFJ-1243	$119.95	1	4	MFJ-1247	$99.95 switches 20 lines	1	2

AC Power Centers

MFJ-1108
$99.95



MFJ-1108, $99.95. Add convenience, prevent data loss, head bounce, equipment damage. **Relay** latches power off during power transients. **Multi-filters** isolate equipment, eliminate interaction, noise, hash. **MOVs** suppress spikes, surges. 3 isolated, switched socketpairs. One unswitched for clock, etc. Lighted power, reset switch. Pop-out fuse. 3 wire, 6 ft. cord. 15A, 125V, 1875 watts. Aluminum case. Black. 18x2¾x2 in. **MFJ-1107, $79.95.** Like 1108 less relay. 8 sockets, 2 unswitched. **MFJ-1109, $129.95.** Like 1107 but intelligent. Switch on device plugged into control socket and everything else turns on. Others available.

Order from MFJ and try it. If not delighted, return within 30 days for refund (less shipping)
One year unconditional guarantee.
Order yours today. Call toll free 800-647-1800. Charge VISA, MC or mail check, money order for amount indicated plus $4.00 each shipping.

CALL TOLL FREE... 800-647-1800

Call 601-323-5869 in Miss., outside continental USA, tech/repair info. Telex 53-4590 MFJ STKV.

Write or Call for Free Catalog!

MFJ ENTERPRISES INCORPORATED
921 Louisville Rd., Starkville, MS 39759

Listing 5: *Program to determine endpoints of the VCO ranges.*

```
10 OUT 1923,128 + 9
20 OUT 1921,128:OUT 1921,0
30 INPUT "CAP CODE",CC
40 OUT 1920,CC
50 INPUT "FINE FREQ",FF
60 OUT 1920,FF
70 INPUT "COMPUTER FREQUENCY",F
80 SOUND F,20
90 GOTO 70
```

the SOUND command to make the display stop rolling. When the display is in the shape of a circle or something close to a circle and it does not cross itself, then the frequency of the speaker is the same as the frequency of the system. The third method is to make both the stereo and the computer's speaker sound at the same time. Then you just listen and adjust the computer speaker's tone until the two tones match. The difference between two tones going at the same time should be rather easy to detect, unless you are tone-deaf, in which case this entire system will not be of much use anyhow. The short BASIC program in listing 5 should make this process easier.

If you have the frequency counter, delete lines 70, 80, and 90. In any case, measure the frequency at the upper and lower ends of each of the 32 different capacitor-combination ranges. Make a chart of these measurements similar to the one in figure 7 and show what areas of the frequency spectrum are covered by what capacitor combination. From this chart I was able to select the capacitors needed to cover the entire audio range. The VCO response is linear over most of the control-voltage range, except for the upper and lower 10 percent of the range, which you should avoid.

The graph in figure 8 shows the fine-frequency code versus the output frequency for one of the capacitor codes. The actual numbers are not important; the point of the graph is to show the slight nonlinearity at the ends of the control-voltage range. On

(*continued*)

Capital Gain.

Time and again, you've heard it said, "To make money, you have to have money."
The truth is, you have to know how to save money before you can think about making more.
That's why more and more people are joining the Payroll Savings Plan to buy U.S. Savings Bonds. That way, a little is taken out of each paycheck automatically.
In no time, you'll have enough Bonds for a new car, your child's education, even a dream vacation.
Whatever you save for, Bonds are the safest, surest way to gain capital.

Take stock in America.

UNITED STATES SAVINGS BONDS

Ad Council A public service of this publication and The Advertising Council.

Q is for Quality

HAVING BEEN SUCCESSFULLY PLACED IN OFFICES WORLDWIDE, QUICK•PLAN IS RECOMMENDED BY USERS AS THE MANAGEMENT TOOL OF THE FUTURE.

Features:
- Menu driven; 250 activities/500 connector relationships.
- All input can be edited with full feature editor.
- User specified time units - minute, hour, day, week, month.
- Precedence logic (Activity on Node capability) with Finish-to-Start, Start-to-Start, Finish-to-Finish, Start-to-Finish, Logic Connectors.
- Activities and Resources can be transferred between projects.
- Assignable and selectable Activity Numbers and Activity Codes.
- Multiple currencies (with a currency converter within the program).
- Six resources per activity; 100 item resource library.
- All activities can carry Time, Cost, and Resources.
- Permits specified dates with constraint options.
- TAILS and LAGS to simplify modelling.
- Memory resident system for maximum computational speed.
- Network logic display with ability to zoom, spread, and isolate activity displays.

is for Quick•Plan
The Executive Project Planning System

QUICK•PLAN RUNS ON MS DOS* FOR:

Data General Desk Top Generation*, DEC Rainbow + *, HP 150*, IBM Compatibles*, Texas Instruments PC*, and WANG PC*; 80 or 132 wide printer with 384K RAM and a graphics option.

PLEASE ALSO CONSIDER OUR "BIG" MANAGEMENT AND PROJECT PLANNING SYSTEM (MAPPS).

MAPPS RUNS ON MOST SUPER MINI COMPUTERS WITH "WORLD CLASS" CAPABILITY AND FUNCTIONALITY.

Mitchell Management Systems Inc.
Westborough Office Park, 2000 West Park Drive, Westborough, Mass. 01581 U.S.A.
Telephone (617) 366-0800 TWX 710-347-1054

*Registered trademarks of Data General, Digital Equipment Corp., Hewlett-Packard, International Business Machines, MicroSoft Corp., Texas Instruments and Wang Laboratories.

Inquiry 243

ADS

ANTEX
DATA
SYSTEMS

ADS 2000 DOT MATRIX PRINTER

165 CPS CORRESPONDENCE QUALITY 9X9 DOT MATRIX
40 CPS VERY NEAR LETTER QUALITY 17X17 DOT MATRIX

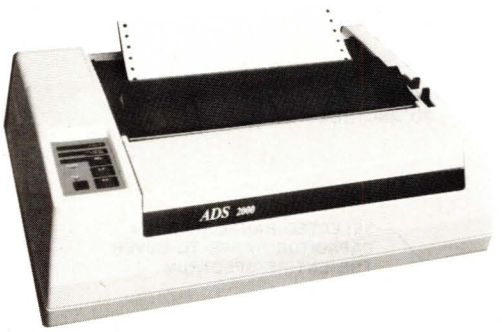

The Antex Data Systems ADS 2000 prints at 165 characters per second in correspondence quality using a 9x9 dot matrix. By turning on the "FINE" mode with a push of a button or through software command it is possible to obtain Very Near Letter Quality (VNLQ) at 40 characters per second using a 17x17 dot matrix. Typestyles included with the ADS 2000 include Pica, Elite, Proportional and Italics and the ability to design up to 256 characters. Subscript and Superscripts can be used for scientific equations, notations and formulas. The ADS 2000 can interface to almost any computer on the market using the Centronics parallel interface.

SuperFont, is an optional software program designed to utilize all the special features of the ADS 2000. With **SuperFont**, the user can create, save and download custom fonts or choose one of the 20 fonts already available on diskette.

ADS 8212 Data Exchange/64K Spooler



The ADS-8212 DATA EXCHANGE/64 is a computer independent interface converter and print spooler. It can be installed between virtually any computer and any peripheral. A microprocessor controls the exchange of data. Input the data in one form and the DATA EXCHANGE/64 stores it in the 64K bytes of buffer memory and then outputs it in another form to the peripheral. The DATA EXCHANGE/64 also allows the user to make multiple copies of the buffer memory.

FEATURES: RDY/BSY, Xon/Xoff or ETX/ACK for input/output



ADS 8213 Winchester Mass Storage System – IBM PC/XT



The Antex System hard disk systems are designed to upgrade the IBM PC, or compatible to a system that operates similar to the IBM PC XT. When installed the hard disk system will operate just like an XT. Once it is formatted, you can use all of IBM's DOS 2.0 or 2.1 utilities designed for their hard disk. And, since it has its own ROM, you can "boot" without a floppy diskette. All systems come complete with interface and controller boards, necessary cabling, and easy step-by-step instructions. Available in 12, 20, 33 and 46 MB with power supply, fan, controller and cables.

ADS 8214 Winchester/Tape Storage*

ADS 8214 5.25 inch winchester storage with tape back-up systems are designed for the IBM PC and XT. The systems are combinations of the ADS 8213 and ADS 8218 systems. All 8213 and 8218 specifications are applicable to the 8214. In addition to the above, the PC can communicate independently to the winchester or tape. The tape unit can back-up the winchester data without read and write through the PC.

ADS 8218 Tape Back-Up Systems*



ADS 8218 5.25 inch tape backup system is designed to back-up data from an IBM PC with an internal or external hard disk system or an IBM XT. ADS 8218 offers an easy to use, reliable high speed tape backup at an affordable price. The system is attached to the PC externally and comes complete with interface and controller boards, cables and easy step-by-step instructions for a fast and simple installation. Available in 40/60 MB formatted.

* TAPE SYSTEMS FEATURES:
- STREAMER BACK UP/RESTORE — 5 MB/MIN.
- FILE BY FILE BACK UP/RESTORE
- DIRECTORY OF TAPE

ADS

ANTEX
DATA
SYSTEMS

A Division of International Antex Inc.
2630 California Street • Mountain View, California 94040
(415) 941-7914 • TWX 704969 INTERAX UD

ADS is a registered trademark of International Antex, Inc.
IBM, IBM PC, IBM PC XT are registered trademarks of International Business Machines Corporation.

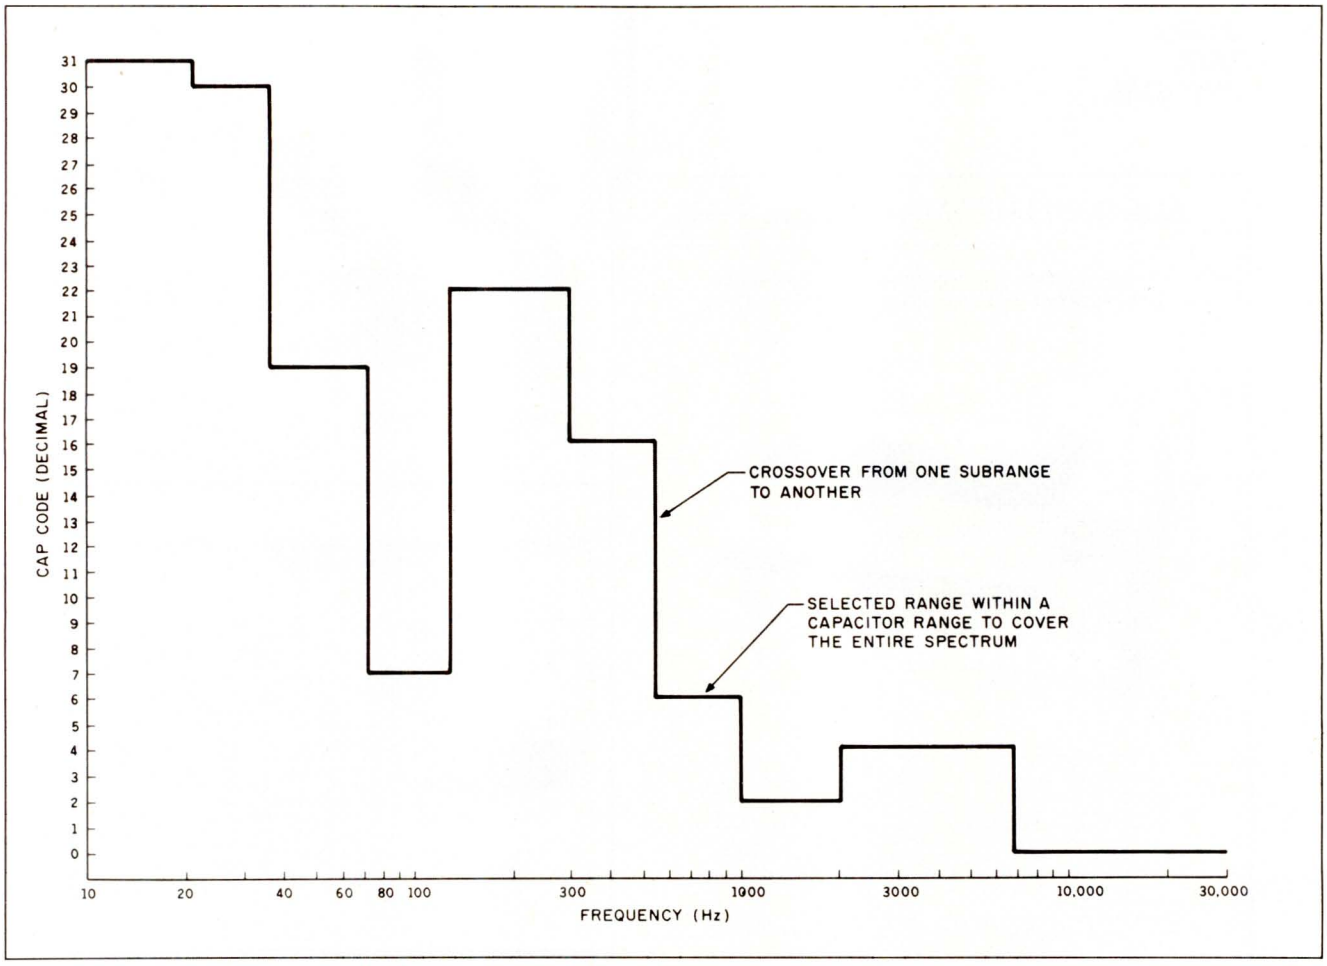

Figure 7: *Spectrum coverage by each capacitor range.*

my selection of codes, I had to use the lower end of the range twice, but I just used a different slope in the conversion equation when I was near the ends. If you study the data I used, you will see that I divided one of the ranges into three separate subranges, each of which has a different slope. Table 3 shows my selection of ranges and the codes, slopes, and starting points for each range. These values give me an accuracy of better than 1 percent over the entire audio spectrum.

The procedure I used to compute the values in the BASIC routines is this: first, take the difference between the lower and upper limits of the selected ranges. Now, try various fine-frequency codes to find the code that will produce the frequencies required for the ends of the ranges. Second, take the difference between the fine-frequency codes required to generate these frequencies. Divide the fine-frequency code delta (difference) by the frequency delta. This becomes the slope of the selected capacitor. The DATA statements have the information organized as lower-frequency limit, capacitor code, slope, and lower fine-frequency code.

The 1k pot adjusts the output level of the VCO to match the particular stereo you are testing. Most require a 200-millivolt (mV) signal for the best frequency response.

ADC Calibration and Testing

To calibrate and test the input section, use a resistor divider network similar to the one in figure 9 to reduce the voltage from the output section to about 5 mV. Feed this 5-mV signal to the input section and check that everything is okay. If you run the Sweep program in this configuration, you will see a straight line, as shown in figure 10a. (The program actually plots using plus (+) symbols. For discussion purposes, we've used a solid line in this and subsequent figures.) Just to check the theory, connect a capacitor across the input connection of the resistor network. Figure 10b shows the classic low-pass filter response. Connecting a coil produces the opposite effect.

Software

I used BASIC in these software examples because all IBM PCs and their

(continued)



Unlock the productivity of the Perkin-Elmer computers in your lab.

If one of your analytical instruments is controlled by a Perkin-Elmer Series 7000 microcomputer, you now have one of the finest Professional Computers in the world.

The keys to productivity

Perkin-Elmer offers an exciting variety of software for the P-E Series 7000. Many packages are available to make your work easier, more satisfying and more productive. For example: write with PECOWRITER/7000, our easy to learn and use word processing package, or with LEX-68™, another word processing program which includes a spelling dictionary and a mass mailing database. Communicate with other computers and online databases using TERM/7000. And acquire data from a wide variety of experiments and instruments with DAQ/7000.

Unleash your creativity

Our list of general purpose software is constantly growing. You can analyze data with Supercomp-Twenty™ spreadsheet. Organize information with our database management package. And graph data with our curve-fitting statistics program. For your own special purposes, create programs in either BASIC or FORTRAN 77.

Access our huge library

Whether you're choosing from the most extensive collection of analytical software available, or using your P-E Series 7000 as a sophisticated laboratory tool, you have all the power and flexibility required. All our programs and computers are truly chemist-friendly.

Seize the opportunity

Perkin-Elmer software will dynamically increase the productivity of your people and your instruments. To discuss the opportunities touched on here, call your Perkin-Elmer representative today. For literature, dial 1-800-762-4000.

Perkin-Elmer Corp., Main Ave. (MS-12), Norwalk, CT 06856 U.S.A.
Tel: (203) 762-1000. Telex 965-954.

Bodenseewerk Perkin-Elmer & Co., GmbH, Postfach 1120, 7770 Ueberlingen, Federal Republic of Germany. Tel: (07551) 811.

Perkin-Elmer Ltd., Post Office Lane, Beaconsfield, Bucks HP9 1QA, England.
Tel: Beaconsfield (049 46) 6161.

LEX-68 is a registered trademark of ACE Microsystems Ltd.
Supercomp-Twenty is a registered trademark of Access Technology, Inc.

PERKIN-ELMER

The science and computer company.
Where solutions come first.

Inquiry 402

1st PLACE
COMPUTER SYSTEMS
13422 N. CAVECREEK RD.
PHOENIX, AZ. 85022
OTHER INFORMATION: 602-867-9897

MasterCard VISA

Free shipping is on UPS ground only.
Send cashier's check or money order ..... all other checks will delay shipping two weeks.
Prices & availability subject to change without notice.



Hi – I'm Joan,
I want to wish you all a Happy New Year and thank you for a successful 1984.
We are looking forward to an even greater 1985. With your help, we can do it, so keep the phones ringing and let us show you our fast and courteous service.

Thank you & God Bless
Joan

FREE SHIPPING
WEST OF MISSISSIPPI
EAST – ½ UPS CHARGES

CALL FREE
1-800-841-2748

PRINTERS COMPUTERS

ALTOS 580-20 . . . . . $3350
ALTOS 580-20 . . . . . $5350
IBM PC . . . . . $CALL
LEADING EDGE PC . . . . . $CALL
NEC 8201 . . . . . $435
SANYO 550-555 . . . . . $CALL

TELEVIDEO
803 . . . . $1769 1603 . . . . $2019
1605 . . . . . $CALL

ABATI LQ $339
BROTHER HR 15P $479
DAISYWRITER 48K $819
EPSON . . . . . $CALL
GEMINI 10X $245
JUKI 6100 . . . . . $409
OKIDATA (LOW PRICES) . . . . $CALL
QUME 1140+ W/INF $1365

CITOH
8510 . . . . $319 1550 . . . . $499
F10-40C PS $899 F1055 . . . . $1179

DIABLO
620 . . . . $769 630 API . . . $1669

NEC
3550 . . . . $1495 3510 . . . . $1235
7710 . . . . $1645 2030 . . . . $659

TERMINALS – MONITORS

ALTOS II $749
QUME 102G $425
WYSE 50 . . . . . $485
TELEVIDEO 950 . . . . . $895
AMDEK 300G $129
B.M.C. COLOR $235
PRINSTON HX12 . . . . . $462

DISK DRIVES – MODEMS

INDUS APPLE $259
INDUS ATARI $299
PROMODEM 1200 . . . . . $325
HAYS SMART MODEM $199
SMARTMODEM 1200 . . . . . $469
SMARTMODEM 1200B $389
MICROMODEM II E $235

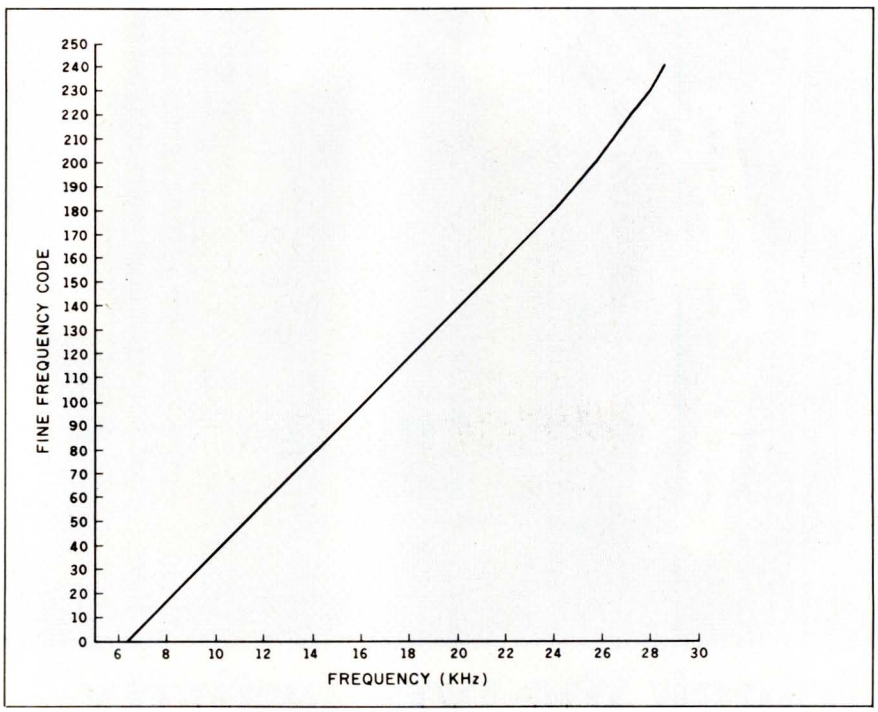

Figure 8: *Graph of fine frequency versus output frequency.*

Table 3: *Calibration data.*

Capacitor Code	Frequency Low	Frequency High	Fine Frequency Low	Fine Frequency High	Delta Freq	Delta Fine Fr	Slope
31	8	20	0	110	12	110	9.16670
30	21	35	70	95	14	25	6.78570
19	36	70	31	86	34	55	2.52940
7	70	124	90	114	54	24	2.11110
22	126	200	15	45	74	30	0.60810
22	201	300	45	59	99	14	0.59600
16	301	552	78	118	251	40	0.46990
6	553	1007	23	69	454	46	0.15210
2	1005	2002	58	118	997	60	0.11840
4	2009	3994	26	86	1985	60	0.04332
4	4001	6660	112	128	2659	16	0.04814
0	6670	7744	0	16	1074	16	0.01490
0	7785	14279	16	65	6494	49	0.01001
0	14280	30116	81	159	15836	78	0.01004

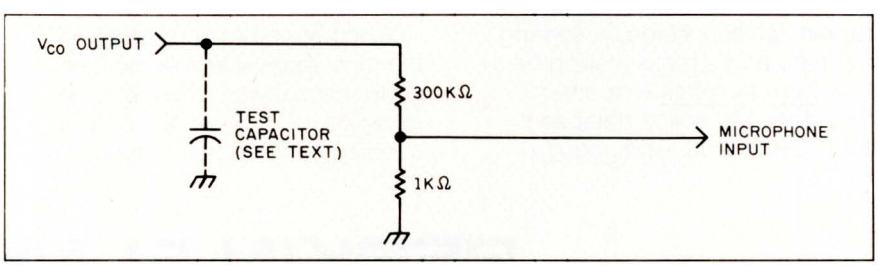

Figure 9: *Input section calibrate and test setup.*

Don't buy a disk/tape system that can't grow with you.



Get the Sysgen™ XL™ *expandable* hard disk and tape back-up system.

Most popular disk/tape systems offer 20 Megabytes of hard disk, plus a 20-Megabyte tape back-up.

That may seem ample now, but do you know whether, a year down the road, 20 Megabytes will give you enough storage?

You don't. So it makes sense to get the *only* disk/tape system that gives you room for expansion later on.

And that doesn't cost you any more now.

The new Sysgen XL comes with 20 Megabytes of fast, reliable hard disk storage, a built-in 60-Megabyte tape for fast, reliable back-up, *plus* room for an additional hard disk drive.

What happens if you later need more hard disk storage?

With the XL, you simply add a second 5¼" disk drive. It fits inside the cabinet, and plugs right into the XL controller.

You can add an additional 20 Megabytes, and back-up with a single pass of the 60-Megabyte tape.

Or add up to 100, and back-up with two tapes.

With the low cost of hard disk drives, expansion is *much* more economical than buying a whole new $3,000 system. Plus, you save desktop space by expanding *inside* the cabinet.

The XL sells for $3,295, including cabling, host adaptor, and utility software. You get everything you need.

(Watch out. Some companies charge extra for cabling and the host adaptor.)

Installation? Just snap in the controller, plug in the system, install the system software, and you're running.

Compare before you buy.

You'll find the XL to be the outstanding disk/tape system for your PC, XT, AT™, or compatible today. And the only system that can expand for your needs for tomorrow.

Trademarks: Sysgen, XL—Sysgen, Inc.; AT—International Business Machines, Inc.

SYSGEN INCORPORATED
47853 Warm Springs Blvd.,
Fremont, CA. 94539
(415) 490-6770 Telex 4990843

Inquiry 106

HARD__DISK™

Apple **IBM**

5 mb Removable
10, 30, 52, 82, & 112 mb Fixed

Transparent Operation
Full Support

APPLE FEATURES

HARD__DISKS operate with a mixture of DOS 3.3, PRODOS 1.0, CPM 2.23, and PASCAL 1.1 on the same or any of 12 drives on one Apple up to 1.8 billion bytes.

DOS - up to 400 kb per volume, 254 volumes per drive: the equivalent of 5,800 floppy diskettes per Apple. Up to 217 files per volume and does not require any user memory.

CP/M - up to 150 mb per volume, 63 volumes per drive. Fully compatible with CPM software.

PRODOS - up to 32 mb per volume, 63 volumes per drive.

PASCAL - up to 16 mb per volume, 64 volumes per drive.

5 mb removable - $1295
Fixed
10 mb - $1295 52 mb - $2995
30 mb - $1995 82 mb - $3995
112 mb - $4995

IBM FEATURES

HARD__DISKS operate with DOS 2.0 using a mixture of any 8 drives on one IBM PC up to .95 billion bytes. Up to 32 megabytes per volume and 8 volumes per drive.

5, 10 and 31 mb half height drives may be internal.

INTERNAL

5 mb removable - $1095
10 mb fixed - $895
31 mb - $1695

EXTERNAL

5 mb removable - $1295
Fixed
10 mb - $1095 55 mb - $2995
31 mb - $1995 87 mb - $3995
119 mb - $4995

Digital Electronic Systems
302 South Main
Estill Springs, TN 37330
615/649-5137

Trademark Apple of Apple Computer, IBM PC of IBM HARD__DISK of Digital Electronic Systems, CP/M of Digital Research.

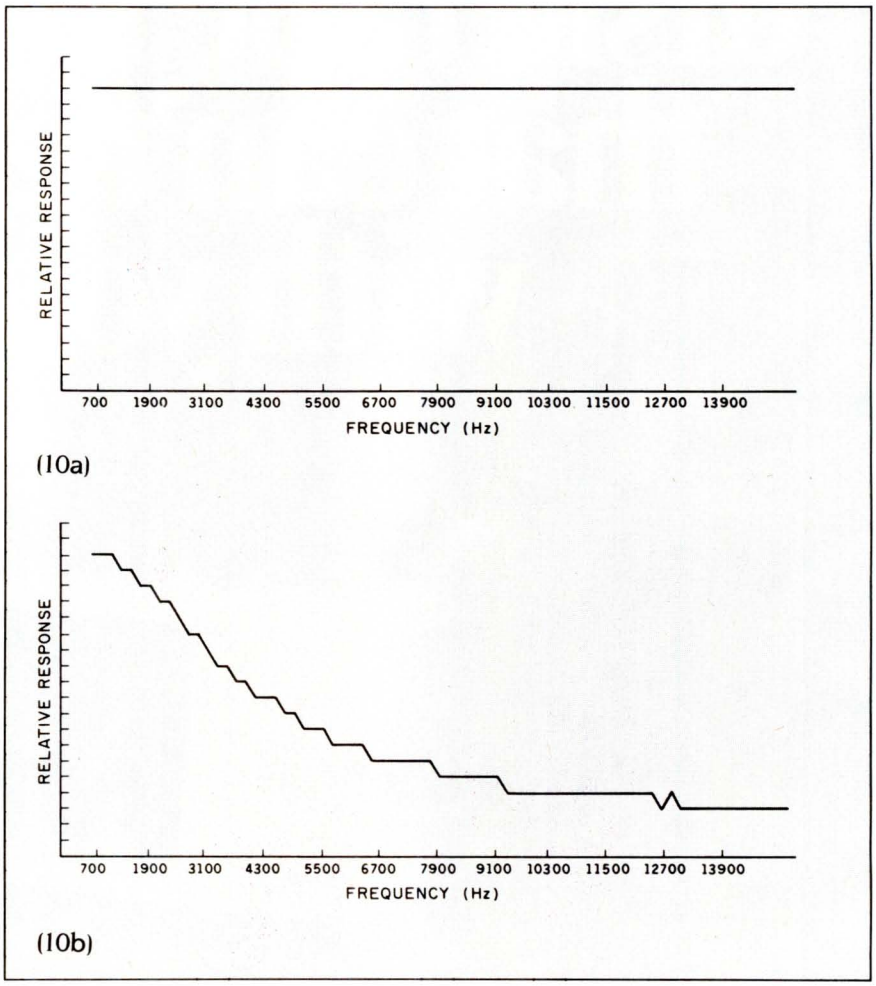

Figure 10: *Straight connection through a resistor divider network (a); 0.47μF capacitor across the input (b).*

Listing 6: BASIC *input and output routines.*

```
10 OUT 1923,137: ' SET-UP THE 8255 FOR OUTPUTS ON
   PORTS A AND B, AND INPUT ON PORT C.
20 OUT 1921,128:OUT 1921,0:' CLEAR THE FREE RUNNING MODE.
30 INPUT "RANGE CODE",RC:' INPUT THE CAPACITOR SELECT CODES.
40 OUTPUT 1921,RC:' OUTPUT THE CAP CODE TO HARDWARE.
50 INPUT "FINE FREQ CODE",FF:'INPUT THE VALUE USED
   FOR THE DAC.
60 OUTPUT 1920,FF:' SEND THE DATA TO THE HARDWARE.
70 REM NOW WASTE SOME TIME TO LET THE HARDWARE SETTLE
   TO THE CORRECT VALUE.
80 FOR I = 1 TO 200:X=X+1:NEXT
90 ADC=INP(1922):'GET THE ADC DATA FROM THE HARDWARE.
100 PRINT "RESULTS = ";ADC
```



Not long ago, *PC* Magazine called MDBS III "The most complete and flexible data base management system available for microcomputers." That's a powerful statement. But then, MDBS III is an amazingly powerful software package. So powerful, in fact, that it lets you build mainframe-quality application systems on your micro or mini. MDBS III is not for beginners. It's for application developers with large data bases or complex data interrelationships who want to define data base structures in the most natural way—without resorting to redundancy or artificial constructs. It's for professionals who can appreciate its extensive data security and integrity features, transaction logging, ad hoc query and report writing capability and its ability to serve multiple simultaneous users. And if you want the power and the glory that only the world's most advanced data management system can provide, MDBS III is for you. For information on MDBS III and our professional consulting services, write or call Micro Data Base Systems, Inc., MDBS/Application Development Products, 85 West Algonquin Road, Suite 400, Arlington Heights, IL 60005. (800) 323-3629, or (312) 981-9200. **MDBS III. ABSOLUTE POWER.**

Inquiry 228

WE'LL GIVE YOU THE POWER.

YOU TAKE THE GLORY.

MDBS III is a trademark of Micro Data Base Systems, Inc.

clones have BASIC. If you want to use another language, then just convert the input and output commands to the appropriate command in the new language. If you are the type to tackle a project like this, then you should have no trouble with these examples. I expect that you will modify these listings to fit your situation.

Listing 7: *The Tune program.*

```
10 '  AUDIO FREQUENCY ANALYZER        [TUNE]
20 '  ------------------------------------------------------------------------
30 '
40 CLS:OUT 1923,137:DIM FL(14),CC(14),SL(14),FCL(14)
50 OUT 1921,128:OUT 1921,0:OUT 1920,255
60 '
70 ' Read the calibration data from the DATA statements.
80 '
90 FOR I = 0 TO 14
100 READ FL(I),CC(I),SL(I),FCL(I)
110 NEXT:KEY OFF
120 LOCATE 12,20:INPUT "FREQUENCY = ";F
130 IF (F<30000) AND (F>8) THEN GOTO 170
140 LOCATE 2,25 :PRINT"BAD FREQUENCY"
150 LOCATE 12,30:PRINT"
160 GOTO 120
170 LOCATE 2,25 :PRINT"
180 '
190 ' Convert the frequency [hertz] to cap code and fine freq code.
200 '
210 I = 1
220 IF F>FL(I) THEN I = I + 1:GOTO 230 I = I - 1
240 DF = INT(.5 + (F - FL(I))*SL(I) + FCL(I))
250 IF DF<0 THEN OUT 1921,0:OUT 1920,255:GOTO 120
260 '
270 ' Output the codes to the VCO.
280 '
290 OUT 1920,DF     :OUT 1921,CC(I):II = 0
300 '
310 ' Average the data over eight iterations.
320 '
330 FOR J = 1 TO 8
340 II = II + INP(1922)
350 NEXT
360 II = 255 - II/8
370 LOCATE 16,20 : PRINT "ADC VALUE = ";INT(II)
380 A$ = INKEY$:IF A$< >" " THEN GOTO 120
390 GOTO 290
400 DATA      8,31,9.1667 ,  0
410 DATA     21,30,6.7857 , 70
420 DATA     36,19,2.5294 , 31
430 DATA     71, 7,2.1111 , 90
440 DATA    126,22,0.6081 , 15
450 DATA    201,22,0.5960 , 61
460 DATA    301,16,0.4699 , 78
470 DATA    553, 6,0.1521 , 23
480 DATA   1005, 2,0.1184 , 58
490 DATA   2009, 4,0.04332, 26
500 DATA   4001, 4,0.04814,112
510 DATA   6670, 0,0.01490,  0
520 DATA   7785, 0,0.01001, 16
530 DATA 14280, 0,0.01004, 81
540 DATA 30000, 0 0.00000,  0
```

Listing 6 shows the basic operation of the hardware without any fancy software to get in the way. It just takes the inputs from the operator and sends them directly to the VCO. It lacks the ability to convert a frequency to the proper capacitor code and fine-frequency value. The next example, the Tune program in listing 7, shows the software getting a frequency from the operator and converting it to a capacitor code and fine-frequency code. The numbers in the data statements will be different, depending on the capacitors you use in the VCO circuit and the adjustment of the 5k-ohm pot on the DAC output.

After the software checks to see if the frequency is a valid number, it searches the table for the correct VCO range for this frequency. When the computer has determined the range to use, it computes the delta between the selected frequency and the lower frequency of the band. This delta is then multiplied by the slope factor and added to the lower fine-frequency code to get the final fine-frequency code. This is just straight-line interpolation. The software then takes this fine-frequency value and sends it to the DAC. This method gives a 1 percent accuracy across the band. If you have a good frequency counter and want to get better accuracy, you can write a program that checks all the possible capacitor codes to select the one that matches the selected frequency the closest.

There are two unused output lines on the 8255 that could be connected to two more capacitors. This will allow you to provide some intermediate values. Now the software will keep looping around, inputting the results and displaying the results on the screen. When the operator hits any key, the software will accept a new frequency to tune.

The Sweep program in listing 8 is similar to the single Tune program. This time the operator gives the starting frequency and the ending fre-

(continued)

GenTech

COMPUTERS

IBM SYSTEM SPECIALS
256K, 2 Drives . . . . . $Call
256K, 2 Drives, color graphics, printer adaptor & PGS HX-12 monitor $2499
256K, 1 Drive & 10 MB Hard Disk $2459
TWO USER SYSTEM (incl. 10 MB, Advanced Digital PC Bd & Terminal) $3859
COLUMBIA
MPC 4220 (256K, 2 Drives) . . . . . $Call
PROFESSIONAL (10 MB, w/tape backup) . . . $Call
VP 2220 (Portable w/256K) . . . . . $Call
COMPUPRO 10 (10 MB, Multi-user) . . . . . $Call



CORONA PC-22 (256K, 2 Drives) . . . . . $Call
Portable PC-22 (256K, MS-DOS 2.0) . . . . . $Call
FUJITSU MICRO 16s (8086/Z80A) $1995
MORROW DESIGNS Pivot, MD2, MD3, MD5, MD11 . . . . . $Call
NEC
PC-8801A (Z80A, 64K, 2 Drives, 12" Monitor, WordStar, MailMerge, Multiplan, NBASIC) . $1149
APC-III Specials w/ printer & Software . . . $Call
SANYO
MBC 550-2 (8088, 128K, 1 DSDD Drive (320K), WordStar, CalcStar, EasyWriter) . . . . . $Call
MBC 555-2 (550-2 Plus 1 Add. Drive, Mailmerge, Spellstar & Infostar) . . . . . $Call
SEEQUA Chameleon/Plus (8088/Z80) . . . . $Call
SWP Micro Computer Products
Co-Power-88 Board (8088 w/ 256K, 1 MB) For **KAYPRO 2, 4, 10 & MORROW** . . . . . $Call
TELEVIDEO
1605 (8088, 128K, 2 Drives, DOS 2.0) . . . . $Call
TPC-II (Portable Version of Above) . . . . . $Call
ZENITH Z-151-52 (8088, 2 Dr, 320K RAM) . . $Call
ZW 151-152 (1 Drive, 10 MB Hard Disk) . . . . $Call

FOR IBM PC/XT/AT & COMPAQ

ADVANCED DIGITAL Multi User Bd (8086) . . $Call
AST RESEARCH INC.
ADVANTAGE!! (Multi Ftn Bd for AT) . . . . . $Call
MEGA PLUS II (64K, Ser & Clk) $279
SIX PACK PLUS (64K, Ser/Par, Clk) $259
MONO GRAPH PLUS Card . . . . . $Call
QUADRAM
EXPANDED QUADBOARD (S, P, Clock, Game)
64K . . . . . $259 384K $429
QUAD 512+ (Serial Port, Maximum 512K)
64K . . . . . $229 256K $349
QUADCOLOR I (Video Board) $199
HERCULES Graphics Board (720x384) $339
Color Card (RGB, Composite, Parallel) . . . $169
INTEL 8087/80287 Math Co-Processor . . . . $Call
KEYTRONIC Deluxe IBM Keyboard (5151) . . . $199
MA SYSTEMS PC Peacock (RGB & Composite, Parallel Port) $209
MICROLOG Baby Blue II (Z80B, 64K, Parallel & Serial Ports, Clock/Calendar) $529
ORCHID PC Turbo (80186 CPU, 8 MHz) . . . . $Call
PANASONIC JA 551-2 (DSDD Thinline Drive) . $149
PARADISE SYSTEMS Multi-Display Card . . . $299
Modular Graphics Card $285
Module A/B . . . . . $Call
PLANTRONICS ColorPlus . . . . . $Call
STB SYSTEMS Graphix Plus II $319
Super Rio w/64K $289
TANDON TM 100-2 (DSDD Disk Drive) $179
TEAC FD-55B (DSDD Thinline Drive) $159
TECMAR Graphics Master (640x400 RGB) . . $489
The Captain (w/ OK) $239
1st Mate (w/ OK) $219
TSENG LABS Ultra Pak $489

HARD DISK

APPLE MACINTOSH HARD DISKS NOW AVAILABLE!
CORVUS, DAVONG & TECMAR . . . CALL FOR PRICES!

AMPEX 20 MB W/25 MB Tape Back-Up . . . $Call
EVEREX 10 MB Internal for IBM $795
MITAC 10 MB Internal for IBM $699
CORVUS
Omnidrive (11 MB) $2079
Transporter . . . $399 The Bank . . . $1779
DATAMAC Trustor 10 . . . . . $1129



DAVONG
Universal External: 10/21 MB . . . . $1875/$2595
IOMEGA Bernoulli Box/Bernoulli Plus . . . $Call
MAYNARD ELECTRONICS 10/20/30 MB . . . $Call
PEGASUS-GREAT LAKES
10 MB Internal For IBM $959
23 MB External (w/ Controller) . . . . . $Call
SYSGEN
10/20 MB w/Tape Back-Up . . . . . $2295/$2849
Image/Qic-File . . . . . $799/$1199
TALLGRASS
12 MB External w/20 MB Tape Back-Up . . . $2399
20 MB External w/20 MB Tape Back-Up . . . $2499
TECMAR
Remov. Cartridge Winchester in PC (5 MB) . $1569
10 MB w/ 5 MB Cartridge in Chassis $3119
XCOMP 16 MB External (For IBM, Apple, Kaypro & Morrow Designs) $1749

DOT MATRIX PRINTERS

C-ITOH Prowriter I 8510 AP $349
DATA PRODUCTS 8000 Paper Tiger Series . . $Call
EPSON JX-80: Color Printer $585
LQ-1500 . . . $1109 RX-80 . . . . . $239
RX-80/80 F/T . . . $Call RX-80/100 . . . $Call



MANNESMANN TALLY
MT 160L . . . $599 MT 180L . . . $789
Spirit-80 . . . $269 MT 1602 . . . $Call
MPI Sprinter/SX (Portable, 300 cps) . . . $Call
NEC
P2 Pinwriter (180 CPS, 10" Carriage) $649
P3 Pinwriter (180 CPS, 15" Carriage) $869
OKIDATA
Ask for NEW Apple Imagewriter Compatible
ML 92 . . . $Call ML 93 . . . $Call
ML 84(P) . . . $Call Pacemark . . . $Call
PANASONIC KX-P1091/1093 . . . . . $299/$Call
STAR MICRONICS
Gemini 10X . . . $249 Gemini 15X . . . $349
Delta 15 . . . $459 Radix 10 . . . $499
TEXAS INSTRUMENTS
850 RO . . . $489 855 RO . . . $759
TOSHIBA
P1340 . . . $Call P1351 . . . $1289

LETTER QUALITY PRINTERS

ABATI LQ-20 (18 CPS, 15" Carriage) $359
AMDEK 5040 (40 CPS) $1299
BROTHER/DYNAX
HR-15 (13 CPS, Diablo Compat.) $369
HR-25/HR-35 . . . . . $619/$869
CORONA Laser Printer faster than **HP** . . . $2699
DIABLO
620 API . . . $809 630 ECS/IBM . . . $1979
JUKI 6100 (17 CPS, Diablo Compat.) . . . . $Call
6300 (40 CPS, Diablo Compat., 3K Buf.) . . . $Call
NEC
2030 . . . $659 3510 . . . $1269
3550 . . . $Call 8850 . . . $1879
OLYMPIA Compact RO/2 . . . . . $379/$419
QUADRAM Quadjet (Ink Jet Printer) $759
QUME Sprint 1140/1155 . . . . . $1299/$1479
Letterpro 20 . . . . . $Call
SILVER-REED EXP 500 (parallel or serial) . . $369
EXP 550 (p or s, 15" carriage) $449
STAR MICRONICS Power Type (18 CPS) . . . $339
TRANSTAR T120/T130 . . . . . $409/$569

PLOTTERS

NEW!! POLAROID PALETTE!! . . . . . $Call
AMDEK DXY-100/Amplot II . . . . . $599/$749
ENTER COMPUTERS
Sweet-P . . . $Call Six Shooter . . . $799
HOUSTON INSTRUMENTS
PC-595/PC-695 New!! . . . . . $Call
DMP-40-2 . . . $749 DMP-29 . . . $1799
DMP-41/42 . . . $2349 DMP-51/52 . . . $3529
DT-11 Digitizer (1-Button Cursor) $679
DT-114 Digitizer (4-Button Cursor) $739
PANASONIC VP-6801A $1449
ROLAND DXY-101/DXY-800 . . . . . $529/$699
STROBE Model 200/Model 260 . . . . $519/$729

MONITORS

AMDEK
Video 300/300A/310A $135/145/159
Color 300 . . . $259 Color 500 . . . $389
Color 600 . . . $459 Color 700 . . . $529
DYNAX Fortis FC10 (13" RGB) . . . . . $Call
MONITECH 12" Green/Amber $80
PRINCETON GRAPHICS HX-12 . . . . . $469
SR-12 (690x480) $609
Max-12 (12" Amber, TTL) $179
QUADRAM Quadchrome $489
Quadchrome II $459
ROLAND
MB-121G . . . $135 MB-122G . . . $155
CB-141 . . . $269 CC-141 . . . $559



TAXAN
KG-12N . . . $109 KG-12N/UY . . . $119
210 (380x262) . . . $259 420 (640x262) . . . $439
ZENITH
ZVM-123A . . . $85 ZVM-122A . . . $90
ZVM-135/136 . . . . . $Call

TERMINALS

ESPRIT
Esprit I . . . $Call Esprit II . . . $479
Esprit III . . . $Call ESP-6310 . . . $559
QUME 102/102A . . . . . $469/$489
103/108 (Green) . . . . . $849/$519
TELEVIDEO 914/924 . . . . . $519/$675
950/970 . . . . . $Call
Personal Terminal $419
w/ 300 Baud Modem $528



VISUAL 50/55/60 . . . . . $559/$689/Call
102/300 . . . . . $839/$769
WYSE
WY-50 . . . $519 WY-75 . . . $609
WY-100 . . . $Call WY-300 . . . $819
ZENITH
Z-29 . . . $649 Z-49 . . . $Call
ZTX-10 . . . $329 ZTX-11 . . . $389

COMMUNICATIONS FOR IBM

BLUE LYNX 3278 . . . . . $Call
DCA Irma/Irmaline/IrmaKey . . . . . $Call
IDEAcomm 3278 . . . . . $Call
ANCHOR
Mark VI . . . $179 Mark XII . . . $259
HAYES
Smartmodem 300/1200 . . . . . $199/$Call
Smartmodem 1200B w/SmartCom II $399
NOVATION
Smart Cat Plus 300/1200 w/Mite $329
PRENTICE POPCOM C100/X100 . . . . $289/$299
PROMETHEUS Promodem 1200 . . . . . $Call
QUADRAM Quadmodem . . . . . $Call
TRANSEND PC Modem Card 1200 . . . . . $419
VEN-TEL 300/1200 Half Card $439

SOFTWARE

ASHTON-TATE dBase III/Framework . . . . $Call
PRENTICE HALL VCN ExecuVision . . . . . $Call
REAL WORLD MBSI Accounting . . . . . $Call
LOTUS 1-2-3/Symphony . . . . . $319/$Call
MICROPRO WordStar 2000/Pro pack . . . . $Call
MICRORIM R:Base 4000/Clout . . . . $285/$Call
MICROSOFT Multiplan $129
SAMNA Word III $375
SATELLITE SOFTWARE WordPerfect . . . . $Call
SOFTWARE PUBLISHING PFS:Write $97
CENTRAL POINT Copy II PC/PLUS $29

FOR APPLE II/IIe

APPLE MacIntosh/IIe SYSTEMS . . . . . $Call
ALS CP/M Card $279
Smarterm II (80 Column Card) $129
AST RESEARCH INC. Multi I/O Card . . . . $Call
DIGITAL RESEARCH CP/M Gold Card w/64K . $339
FOURTH DIMENSION 16K RAM Card $55
80 Column Card w/64K (IIe Only) $129
HAYES
Micromodem IIe w/SmartCom I $239
Smartmodem 300/1200 . . . . . $199/$479
INTERACT. STRU. PKASO Universal $125
MICROSOFT Premium Softcard (IIe) . . . . $Call
Softcard (Apple/Franklin) $229
MICROTEK Dumpling-GX $69
NOVATION
J-Cat (Auto Orig/Answer, 300 Baud) . . . $99
Apple Cat II (300 Baud) $209
212 Apple Cat II (1200 Baud) $389
103/212 Smart Cat (1200 Baud) $389
ORANGE MICRO Grappler+ $109
Buffered Grappler+ (16K) $169
Grappler Interface for ImageWriter . . . . $Call
PCPI Applicard 6 MHZ $249
RANA Elite I/II/III . . . . . $Call
TRANSEND ASIO $125
Modemcard w/Source $239

MISCELLANEOUS

RAM CHIPS
64K SET . . . $Call **256K SET** . . . **$Call**
DOUBLE-SIDED DISKETTES
SKC (10 box min) . . . $12 same as 3M
3M . . . $30 Dysan . . . $31
Maxell . . . $30 Verbatim . . . $30
PRINT BUFFERS
QUADRAM Microfazer
Parallel/Parallel
16K . . . $139 64K . . . $185 128K . . . $239
Serial/Serial, Serial/Parl, Parl/Serial
8K . . . $145 16K . . . $155 64K . . . $209
INTERACTIVE STRUCT. ShuffleBuffer 32K . . . $269
PRACTICAL PERIPHERALS Microbuffer 32K . . $209

ATARI
RANA 1000.. $245

SURGE PROTECTORS
EPD/CURTIS All models . . . . . $Call
NETWORX Wire Tree/Wire Tree Plus . . . $45/$60
ULTIMA SF-600 . . . . . $39
EMERGENCY POWER SYSTEMS
TrippLite BC200-10 (battery incl) $270
TrippLite BC425-FC (425 Watts) $429
SOLA ELECTRIC Mini UPS . . . . . $Call

CUSTOMER SERVICE

401-781-0020

ORDERS ONLY

800-843-4302

150 Broadway, Suite 2212, N.Y., NY 10038

NO CHARGE FOR CREDIT CARDS.
Money Order, Cashier's Ck, Personal Ck (2 Weeks To Clear).
APO Orders Add 6% (minimum $7). Add 3% For Net Terms.
All Returned Non-Defective Merchandise Are Subject To 20% Restocking Charge.
GenTech Reserves the Right to Change Advertised Prices.

AMERICAN EXPRESS · MasterCard · VISA

Now used by Aerospace Industry, TV Networks, Law Firms, Consultants, Research Labs, Academia . . .

WordStar PERFECTED

At last!

At last, WordStar and other word processing programs can now be perfected—thanks to MagicPrint™, MagicIndex™, and MagicBind™ from CES, the leader in precision software.

True proportional spacing, footnoting, multiple line heading/footing, file merging, indexing of legal citations, 3-tray sheet feeder control—MagicSeries™ provides over 70 features that will enhance the quality of your documents and improve your professional image.

More and more reviewers and users discern the superior quality and performance of MagicSeries:

"I, for one, wouldn't want to do without it."
(***Creative Computing***, June/83)

"MagicBind supersedes MailMerge."
(***Microsystems***, March/84)

"If you're fussy about print quality, and if you want the best possible output from your [computer] system, there is nothing to compare with MagicIndex."
(***PC***, October 30/84)

"A set-up of WordStar and MagicIndex is, I think, the ultimate in word processing."
(Pennsylvania law firm)

"Thanks to MagicBind, the 'missing link' in my system [IBM PC] has been found. With so many things in the world which don't work, it's marvelous to find a product that does what you expect—and even more." **(Network TV news producer)**

Yes, we run into many users who have spent much time (and money and frustration) tyring out every program offering proportional spacing or footnoting only to find the results unsatisfactory—until, that is, they try MagicSeries.

For dealers, MagicSeries will serve as an effective sales tool and help build a satisfied customer base.

The cost for all three packages is only $295! You will save this amount in paper alone, because proportional spacing puts up to 20% more words on a page. But the real pay-offs are in (1) increased ease of operation, (2) savings in time and money through efficiency, and (3) a much improved professional and corporate image through typeset quality documents.

For more information, call or write:

CES

Computer EdiType Systems
509 Cathedral Parkway Suite 10A
New York, N.Y. 10025
(212) 222-8148

Listing 8: *The Sweep program.*

```
10 ' AUDIO FREQUENCY ANALYZER  [SWEEP]
20 ' ------------------------------------------------------------
30 ' This system will sweep through a frequency range and
40 ' display the responce to each frequency.
50 '
60 CLS:OUT 1923,137:DIM FL(14),CC(14) ,SL(14) ,FCL(14)
70 PRINT: PRINT"          AUDIO FREQUENCY ANALYZER"
80 '
90 ' Output the pulse to start the ADC conversion.
100 ' Also, park the VCO at the lowest frequency.
110 '
120 OUT 1921,128:OUT 1921,31:OUT 1920,0
130 '
140 ' READ THE CALIBRATION DATA FROM THE DATA STATEMENTS.
150 '
160 FOR I= 0 TO 14
170 READ FL(I),CC(I),SL(I),FCL(I)
180 NEXT
190 KEY OFF:IX=5
200 '
210 ' Input the lower and upper bounds of the range to sweep.
220 '
230 LOCATE 10,15:INPUT "FREQ LOW =";FL
240 LOCATE 12,15:INPUT "FREQ HIGH=";FH
250 FD=(FH-FL)/72
260 CLS
270 IF (FD>0) AND (FH<30000) AND (FL>8) THEN GOTO 330
280 CLS: LOCATE 3,30:PRINT"BAD FREQUENCY LIMITS"
290 GOTO 230
300 '
310 ' Print the axis on the screen.
320 '
330 FOR I = 1 TO 22:PRINT "-":NEXT:PRINT " ";
340 FOR I = FL+FD*3 TO FH STEP FD*6:PRINT USING " #####";I;:NEXT
350 FOR F = FL TO FH STEP FD
360 '
370 ' CONVERT THE FREQUENCY [F] FROM HERTZ TO CAPACITOR CODE AND
380 '    FINE FREQUENCY CODE.
390 '
400 I=1
410 IF F>FL(I) THEN I=I+1:GOTO 410
420 I=I-1
430 DF=INT(.5+(F+FL(I))*SL(I)+FCL(I))
440 '
450 ' If an incorrect code appears, then abort the run and start over.
460 '
470 IF DF< 0 THEN OUT 1921,0:OUT 1920,255:GOTO 230
480 OUT 1920,DF      :out 1921,CC(I):II=0
490 '
500 '  Delay to let the stereo settle to its response.
510 '
520 FOR T = 1 TO 50:I=I+1:NEXT
530 IF F=FL THEN FOR I = - TO 300: T=T+3: NEXT
540 '
550 ' Take eight samples and average.
560 '
570 FOR I=1 TO 8
580 II=II+INP(1922)
590 NEXT
600 II=II/8
```

(continued)

Giant Killer

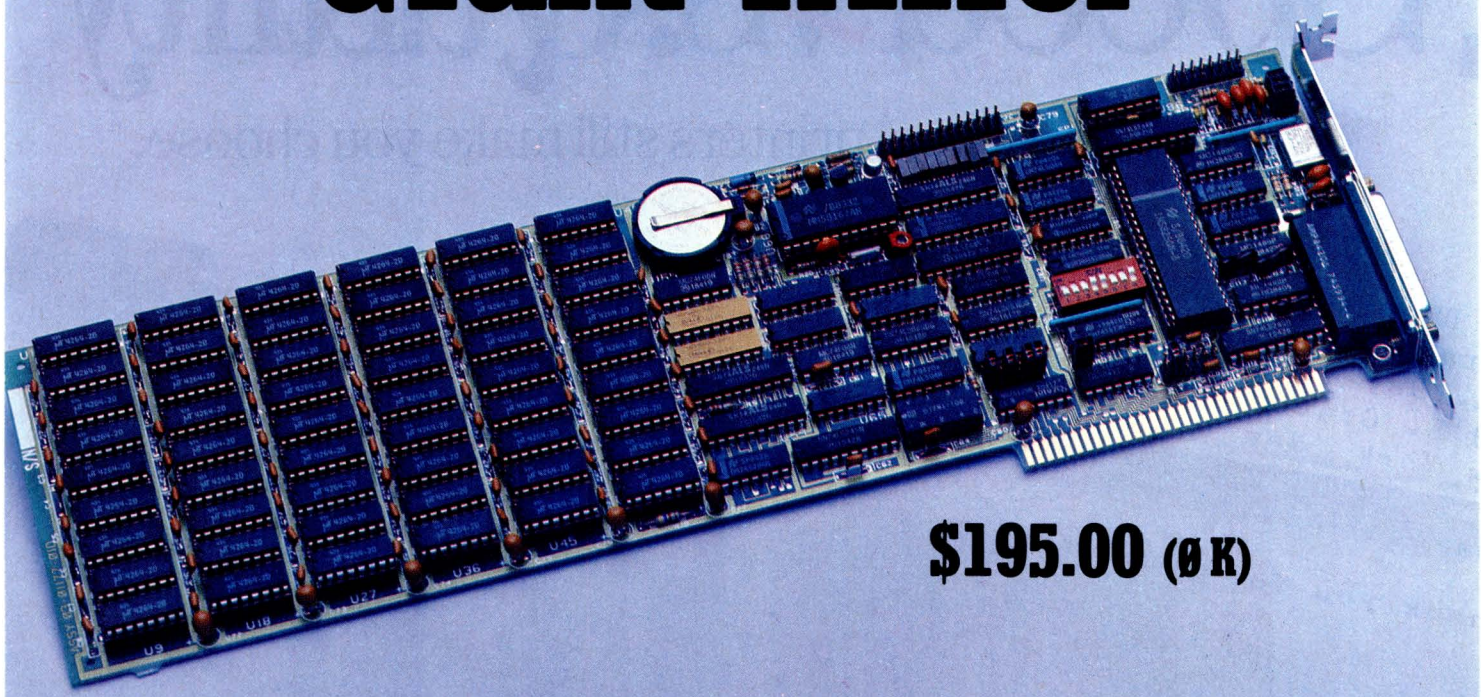

$195.00 (ØK)

Thinking of buying a multifunction board? You owe it to yourself to check out the BT6Plus.

There's a new entrant into the IBM PC multifunction board market and we are proud to be the first company to sell their products. Basic Time's BT6Plus is a functional equivalent to AST's SixPakPlus™ and Quadram's Quadboard™, but at a fraction of the price.

BT6Plus is made with scrupulous attention to quality and detail. Basic Time runs all their boards through a battery of tests throughout the production process with all options installed. This insures that if you buy a 64K board today, it will function normally when you upgrade it later.

BT6Plus comes with memory sockets for adding up to 384K, parallel printer port, asynchronous communications port (RS-232C), electronic disk emulation and printer spooling software, and cable mounting bracket. All functions are fully IBM compatible. Our price, $195.00, includes a one year warranty. 64K memory, installed and tested, is available for $35. An optional game port for $20.

Qubie' has been a pioneer in marketing quality products, providing service to back them up and offering them at low prices. You don't supply companies like IBM, Exxon, General Motors and Lockheed unless you have first-rate products and service. Join the tens of thousands of corporations, institutions and PC owners who have come to Qubie' for enhancement products.

Good service starts with answering your questions before and after you buy. It continues with same or next day shipment of your order. Since we only sell a few selected products, we have the information and inventory to help you fast.

We perform repairs in our own service department within 48 hours, should you ever need service during the one year warranty period.

Our price is the whole price. All prices include UPS surface charges and insurance. In a hurry? Two day UPS air service is just $5.

Corporations, dealers and institutions, call for volume purchase price information.

Inquiry 293

No Risk Guarantee

If you are not completely satisfied with your purchase, you may return it within 30 days for a full refund, including the cost to send it back. If you can get any of our competitors to give you the same guarantee, buy both and return the one you don't like.

Order Today, Shipped Tomorrow!

For fastest delivery, send cashiers check, money order, or order by credit card. Personal checks, allow 18 days to clear. California residents, add 6% sales tax.
Hours: Mon.-Fri. 8:00 a.m.-6:00 p.m. PST
Sat. 9:00 a.m.-1:00 p.m. PST

(800) 821-4479
Toll Free Outside California

(805) 987-9741
Inside California

QUBIE'

4809 Calle Alto
Camarillo, CA 93010

London (01) 223-4569
Paris (01) 321-5316
Sydney (02) 579-3322

© Qubie' 1984

Speed and vs. Quality

Other daisy wheel printers still make you choose.

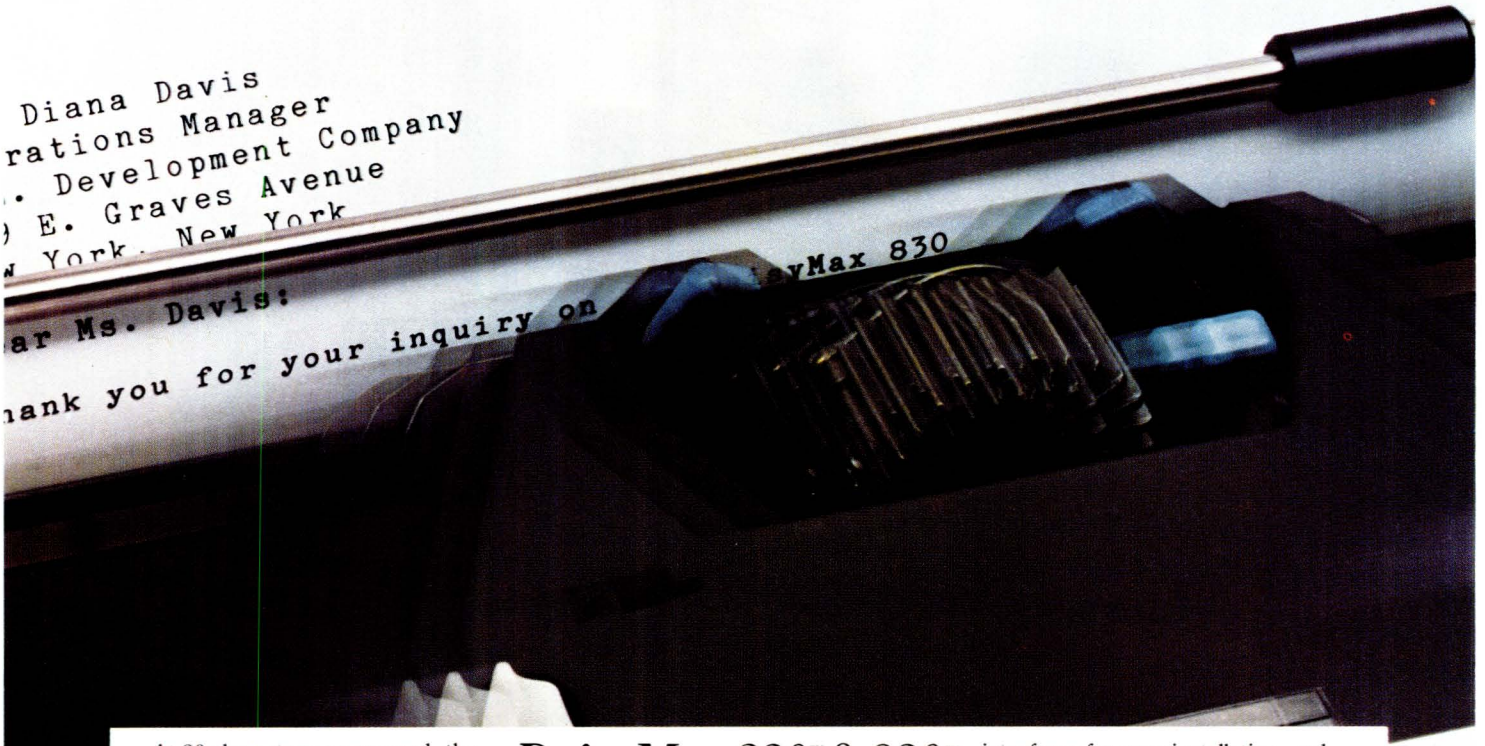

At 80 characters per second, the DaisyMax 830 is one of the fastest letter-quality, daisy wheel printers you can buy.

And that means you no longer have to sacrifice image quality to increase productivity!

Speed and superb quality are but two of a long list of benefits you get with the DaisyMax 830.

Multiple users can share the DaisyMax 830 since it is designed for heavy volume word processing environments. Plus, you get standard

DaisyMax 320™ & 830™



interfaces for easy installation, and friction, tractor and cut sheet feeders to handle all your office forms. All these great features also are available in the DaisyMax 320, offering print speeds up to 48 cps.

And of course *both* printers feature rugged reliability—a hallmark of Fujitsu products earned from over 30 years as a technology leader and equipment supplier to companies worldwide. Reliability backed by TRW service nationwide.

Contact your nearest distributor for your local dealer.

Inquiry 139

Fujitsu Printers

Maximum Quality. Maximum Value.

FUJITSU

Authorized Fujitsu Distributors

Algoram Computer Products (415) 969-4533, (714) 535-3630, (206) 453-1136, (916) 481-3466; **Allen Edwards Associates Inc.** (213) 328-9770; **Four Corners Technology** (602) 998-4440, (505) 345-5651; **Gentry Associates Inc.** (305) 859-7450, (305) 791-8405, (813) 886-0720, (404) 998-2828, (504) 367-3975, (205) 534-9771, (919) 227-3639, (803) 772-6786, (901) 683-8072, (615) 584-0281; **Inland Associates, Inc.** (913) 764-7977, (612) 343-3123, (314) 391-6901; **Logon Inc.** (201) 646-9222, (212) 594-8202, (516) 487-4949; **Lowry Computer Products, Inc.** (313) 229-7200, (216) 398-9200, (614) 451-7494, (513) 435-7684, (616) 363-9839, (412) 922-5110, (502) 561-5629; **MESA Technology Corp.** (215) 644-3100, (301) 948-4350, (804) 872-0974; **NACO Electronics Corp.** (315) 699-2651, (518) 899-6246, (716) 223-4490; **Peak Distributors, Inc. (An affiliate of Dytec/Central)** (312) 394-3380, (414) 784-9686, (317) 247-1316, (319) 363-9377; **R² Distributing, Inc.** (801) 595-0631; **R² Distributing of Colorado, Inc.** (303) 455-5360; **Robec Distributors** (215) 368-9300, (216) 757-0727, (703) 471-0995; **S&S Electronics** (617) 458-4100, (802) 658-0000, (203) 878-6800, (800) 243-2776; **The Computer Center** (907) 456-2281, (907) 561-2134, (907) 789-5411; **USDATA** (214) 680-9700, (512) 454-3579, (713) 681-0200, (918) 622-8740. **In Canada, Micos Computer Systems, Inc.** (416) 624-0320, (613) 230-4290, (514) 332-1930, (204) 943-3813; **SGV Marketing, Inc.** (416) 673-2323, (1-800) 387-3860 (outside Ontario); **Systerm Inc.** (514) 332-5581.

Additional Ribbon Distributors

Altel Data (403) 259-7814; **EKM Associates, Inc.** (416) 497-0605; **Metropolitan Ribbon & Carbon** (703) 451-9072, (800) 368-4041; **The Very Last Word** (415) 552-0900, (800) 652-1532 CA, (800) 227-3993 USA. **In Canada, Tri-Media, Inc.** (514) 731-6815.

Fujitsu Printers

Maximum Quality. Maximum Value.

FUJITSU

Inquiry 140


```
610 '
620 ' Convert the data to a range of 1 to 22 for the screen.
630 '
640 I = INT(22 - (255 - II)/4
650 X$ = " + "
660 '
670 ' Check for out-of-range conditions
680 '
690 IF I<1   THEN I=1   :X$ = "^"
700 IF I>22  THEN I=22  :X$ = "#"
710 '
720 ' Place the mark on the screen.
730 '
740 LOCATE I,IX:      PRINT X$;
750 IX = IX + 1
760 NEXT
770 OUT 1921,31:OUT 1920,0
780 LOCATE 23,1:END
790 ' ------------------------------------
800 ' - CALIBRATION DATA -
810 ' ------------------------------------
820 '     FREQ LOW, CAP CODE, SLOPE, FINE FREQ LOW
830 '
840 DATA      8,  31, 9.1667 ,    0
850 DATA     21,  30, 6.7857 ,   70
860 DATA     36,  19, 2.5294 ,   31
870 DATA     71,   7, 2.1111 ,   90
880 DATA    126,  22, 0.6081 ,   15
890 DATA    201,  22, 0.5960 ,   61
900 DATA    301,  16, 0.4699 ,   78
910 DATA    553,   6, 0.1521 ,   23
920 DATA   1005,   2, 0.1184 ,   58
930 DATA   2009,   4, 0.04332,   26
940 DATA   4001,   4, 0.04814,  112
950 DATA   6670,   0, 0.01490,    0
960 DATA   7785,   0, 0.01001,   16
970 DATA  14280,   0, 0.01004,   81
980 DATA  30000,   0, 0.00000,    0
```

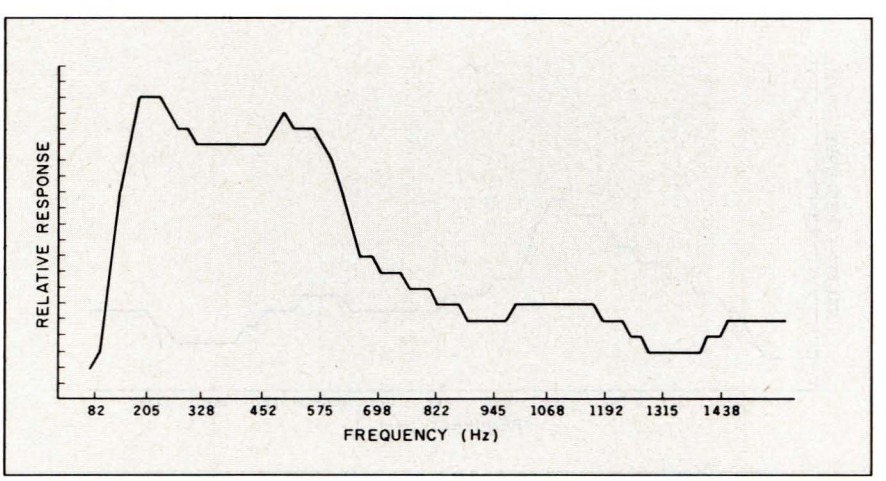

Figure 11: *Frequency response with all controls even.*

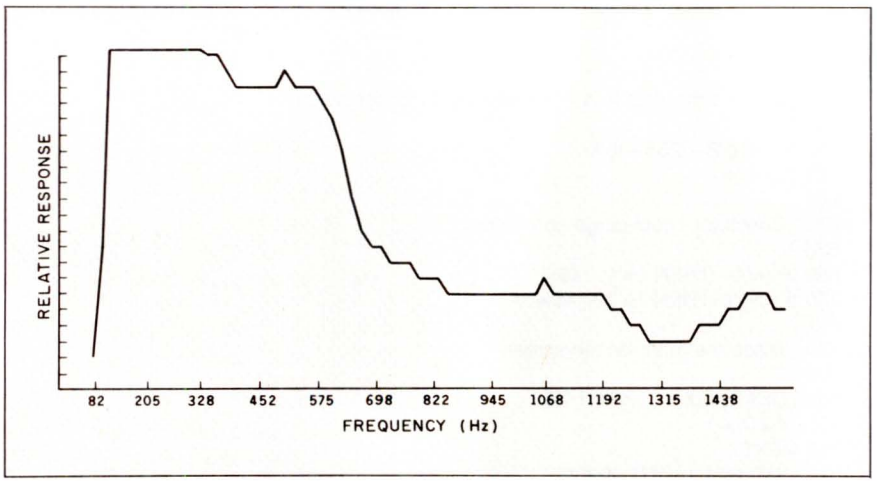

Figure 12: *Frequency response with full bass on.*

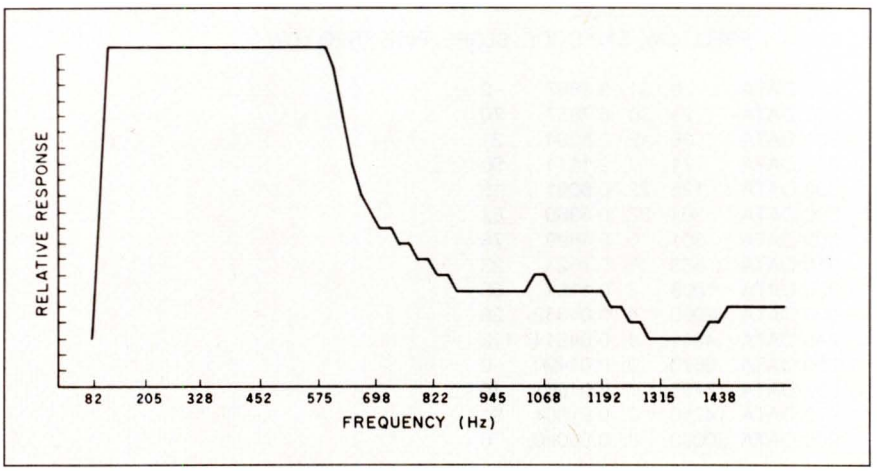

Figure 13: *Frequency response with loudness filter on.*

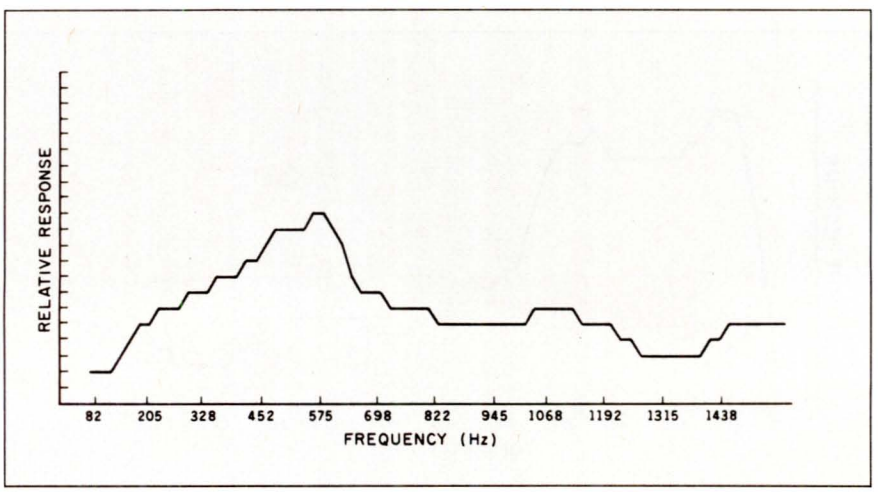

Figure 14: *Frequency response with full bass off.*

quency. The software then sweeps through this range and records the results. These results are shown on the screen as a graph with the frequency across the bottom and the computed value of the input up the side. There are no units for the vertical axis, it is just the relative power of the signal. The character "^" means that the signal went off the top of the chart. The character "#" means the signal went off the bottom of the chart.

Sample Results

I placed the microphone on a pillow to reduce noise. I connected the system to the right-channel Aux input of the stereo and set all the tone controls to the middle position; I set all the filter switches (loudness, high, and low) off. The most dramatic change happened in the lower frequencies, so I ran the Sweep program with limits of 20 to 1500 Hz. Figure 11 shows the results of this test. There was a peak at 200 Hz and at 500 Hz. Next, I turned the bass control full on, which gave the results shown in figure 12. Between 100 and 575 Hz the response went off the top of the scale. Above 800 Hz the two curves are similar. I then set the bass back to even and switched on the loudness filter. Figure 13 shows a boost in the frequencies below 500 Hz. The last test was to turn the loudness filter off and turn the bass control off. The results are shown in figure 14; they show that there was a small hump around 500 Hz. With some more fiddling with the controls, I reduced the hump and then adjusted the upper half of the spectrum.

Conclusions

You can use this system to test audio filters, graphics equalizers, or musical-instrument amplifiers. You can also use the output section alone as an audio-frequency generator or the input section with a microphone to monitor for a rapid change in sound or for an upper limit on the sound. Finally the I/O section can be adapted to many other projects besides the one I described. ■



Join The Leader

. . . and be a Leader!

MicroAge is the computer solution leader. Throughout the United States and Canada, businesspeople rely on MicroAge for advice, leading products, and service when computerizing their companies.

But remaining the leader takes talented professionals who are willing to invest in their own community. People who are willing to assume a leadership position. That's why MicroAge is meeting with individuals who want to own and operate a MicroAge sales organization.

Owning a MicroAge franchise is more than running a store. We sell multi-user systems, local area networks and telephone systems. . . along with personal computers. We provide service, installation and training for our customers.

If you would like to develop a long-term relationship serving the businesses in your area, let's talk business! Call or write:

MicroAge®
COMPUTER STORES
"The Solution Store"®

1457 West Alameda • Tempe, AZ 85282
1-800-245-4683

In Arizona or outside the continental U.S. call (602) 968-3168

"The Leader In Multi-User Technology"

Inquiry 226

7400

Part No.	Pins	Price
SN7400N	14	.29
SN7401N	14	.29
SN7402N	14	.29
SN7403N	14	.29
SN7404N	14	.35
SN7405N	14	.49
SN7406N	14	.59
SN7407N	14	.59
SN7408N	14	.29
SN7409N	14	.35
SN7410N	14	.29
SN7411N	14	.29
SN7412N	14	.49
SN7413N	14	.39
SN7414N	14	.49
SN7416N	14	.49
SN7417N	14	.59
SN7420N	14	.19
SN7421N	14	.59
SN7422N	14	.59
SN7423N	16	.69
SN7425N	14	.39
SN7426N	14	.39
SN7427N	14	.49
SN7428N	14	.59
SN7430N	14	.35
SN7432N	14	.39
SN7433N	14	.49
SN7437N	14	.25
SN7438N	14	.49
SN7439N	14	.79
SN7440N	14	.19
SN7441N	16	.89
SN7442N	16	.45
SN7443N	16	1.25
SN7444N	16	1.25
SN7445N	16	.69
SN7446N	16	.75
SN7447N	16	.75
SN7448N	16	.75
SN7454N	14	.19
SN7459N	14	.39
SN7460N	14	.39
SN7470N	14	.39
SN7472N	14	.39
SN7473N	14	.39
SN7474N	14	.39
SN7475N	16	.45
SN7476N	16	.39
SN7479N	14	4.95
SN7480N	14	.89
SN7482N	14	1.49
SN7483N	16	.55
SN7485N	16	.59
SN7486N	14	.39
SN7489N	16	2.25
SN7490N	14	.49
SN7491N	14	.79
SN7492N	14	.45
SN7493N	14	.45
SN7494N	14	.89
SN7495N	14	.49
SN7496N	16	.49
SN7497N	16	3.25
SN74100N	24	1.95
SN74104N	14	1.19
SN74105N	14	1.19
SN74107N	14	.29
SN74109N	16	.39
SN74116N	24	1.49
SN74121N	14	.45
SN74122N	14	.69
SN74123N	16	.55
SN74125N	14	.49
SN74126N	14	.49
SN74132N	14	.59
SN74136N	14	.69
SN74141N	16	.89
SN74142N	16	3.95
SN74143N	24	3.95
SN74144N	24	3.95
SN74145N	16	.65
SN74147N	16	1.29
SN74148N	16	.89
SN74150N	24	1.49
SN74151N	16	.49
SN74152N	14	.49
SN74153N	16	.99
SN74154N	24	3.95
SN74155N	16	.49
SN74156N	16	.59
SN74157N	16	.49
SN74158N	16	.89
SN74159N	24	1.95
SN74160N	16	.59
SN74161N	16	.59
SN74162N	16	.59
SN74163N	16	.59
SN74164N	14	.69
SN74165N	16	.69
SN74166N	16	.69
SN74167N	24	2.95
SN74170N	16	1.59
SN74172N	24	4.95
SN74173N	16	.85
SN74174N	16	.59
SN74175N	16	.59
SN74176N	14	.79
SN74177N	14	.79
SN74179N	16	1.49
SN74180N	14	.69
SN74181N	24	1.95
SN74182N	16	1.05
SN74184N	16	2.29
SN74185N	16	2.29
SN74190N	16	.69
SN74191N	16	.69
SN74192N	16	.69
SN74193N	16	.69
SN74194N	16	.69
SN74195N	16	.49
SN74196N	14	.75
SN74197N	14	.75
SN74198N	24	1.19
SN74199N	24	1.19
SN74221N	16	1.19
SN74251N	16	.79
SN74273N	20	1.95
SN74276N	20	2.49
SN74279N	16	.79
SN74283N	16	1.39
SN74284N	16	2.95
SN74285N	16	2.95
SN74365N	16	.55
SN74366N	16	.55
SN74367N	16	.55
SN74368N	16	.55
SN74390N	16	1.49
SN74393N	14	1.49

74LS

74LS00	14	.29			74LS244	20	1.29
74LS01	14	.29			74LS245	20	1.49
74LS02	14	.35	74LS132	14	.65	74LS251	16	.59
74LS03	14	.29	74LS133	16	.59	74LS253	16	.59
74LS04	14	.39	74LS136	14	.39	74LS257	16	.59
74LS05	14	.35	74LS138	16	.59	74LS258	16	.59
74LS08	14	.35	74LS139	16	.59	74LS260	14	.59
74LS09	14	.35	74LS145	16	1.19	74LS266	14	.49
74LS10	14	.35	74LS147	16	1.95	74LS273	20	1.49
74LS11	14	.35	74LS148	16	1.79	74LS279	16	.49
74LS14	14	.59	74LS151	16	.59	74LS280	14	1.95
74LS15	14	.35	74LS153	16	.59	74LS283	16	.69
74LS20	14	.29	74LS154	24	1.49	74LS299	20	2.95
74LS21	14	.35	74LS155	16	.69	74LS322	20	3.95
74LS26	14	.29	74LS156	16	.69	74LS323	20	3.95
74LS27	14	.35	74LS157	16	.69	74LS347	16	.79
74LS28	14	.39	74LS158	16	.59	74LS352	16	1.09
74LS30	14	.39	74LS160	16	.69	74LS353	16	1.09
74LS32	14	.39	74LS161	16	.69	74LS365	16	.49
74LS37	14	.35	74LS162	16	.69	74LS366	16	.49
74LS38	14	.39	74LS163	16	.69	74LS367	16	.49
74LS42	16	.49	74LS164	14	.89	74LS368	16	.49
74LS47	16	.89	74LS165	16	.89	74LS373	20	1.49
74LS51	14	.29	74LS168	16	1.19	74LS374	20	1.49
74LS73	14	.39	74LS169	16	1.49	74LS375	16	.69
74LS74	14	.49	74LS170	16	1.49	74LS386	14	.39
74LS75	16	.45	74LS173	16	.69	74LS393	14	1.49
74LS76	16	.39	74LS174	16	.69	74LS399	16	1.49
74LS85	16	.89	74LS175	16	.69	74LS490	16	1.95
74LS86	14	.39	74LS181	24	2.49	74LS533	20	1.95
74LS90	14	.39	74LS190	16	.79	74LS534	20	1.95
74LS92	14	.55	74LS191	16	.89	74LS540	20	1.95
74LS93	14	.59	74LS192	16	.79	74LS541	20	1.49
74LS96	16	.89	74LS193	16	.89	74LS640	20	2.19
74LS107	14	.39	74LS194	16	.69	74LS641	20	2.19
74LS109	16	.39	74LS195	16	.59	74LS645	20	2.19
74LS112	16	.45	74LS196	14	.89	74LS670	16	1.49
74LS114	14	.39	74LS197	14	.89	74LS688	20	2.95
74LS122	14	.49	74LS221	16	1.09	81LS95	20	1.49
74LS123	16	.79	74LS240	20	.99	81LS96	20	1.49
74LS125	14	.59	74LS241	20	.99	81LS97	20	1.49
74LS126	14	.59	74LS243	14	1.09	81LS98	20	1.49

74S/PROMS*

74S00	14	.35			74S241	20	1.95
74S02	14	.35	74S114	14	.55	74S242	14	2.19
74S03	14	.35	74S124	16	2.75	74S243	14	2.19
74S04	14	.45	74S132	14	1.89	74S244	20	2.19
74S05	14	.45	74S133	16	.45	74S251	16	.99
74S08	14	.45	74S135	16	.89	74S253	16	.99
74S09	14	.39	74S136	14	1.39	74S257	16	.99
74S10	14	.35	74S138	16	.89	74S258	16	.99
74S11	14	.35	74S139	16	.89	74S260	14	.79
74S15	14	.35	74S140	14	.69	74S263	24	2.39
74S20	14	.35	74S151	16	.99	74S280	14	1.89
74S22	14	.35	74S153	16	.99	74S287*	16	1.79
74S30	14	.35	74S157	16	.99	74S288*	16	1.79
74S32	14	.45	74S158	16	.99	74S299	20	5.95
74S37	14	.99	74S158	16	.99	74S373	20	2.49
74S38	14	.89	74S160	16	2.29	74S374	20	2.49
74S51	14	.35	74S169	16	4.29	74S387*	16	1.95
74S64	14	.39	74S174	16	1.09	74S471*	20	4.95
74S65	14	.39	74S175	16	1.09	74S472*	20	4.95
74S74	14	.55	74S188*	16	1.75	74S473*	20	4.95
74S85	16	1.99	74S194	16	1.49	74S570*	16	2.95
74S86	14	.55	74S195	16	1.49	74S571*	16	2.95
74S112	16	.55	74S196	14	1.49	74S572*	18	4.95
74S113	14	.55	74S240	20	1.95	74S573*	18	4.95

CA—LINEAR

CA3010H		1.09			CA3130E	8	1.19
CA3039H		1.25	CA3081N	16	1.15	CA3140E	8	.85
CA3046N	14	.99	CA3082N	16	1.15	CA3160H		1.79
CA3059N	14	2.95	CA3083N	16	1.15	CA3160E	8	1.49
CA3060N	16	2.95	CA3086N	14	.85	CA3161E	16	1.79
CA3065E	14	1.49	CA3089N	16	1.95	CA3162E	16	6.95
CA3080E	8	.99	CA3096N	16	1.75	CA3189E	16	2.79
						CA3401N	14	.59

CD—CMOS

CD4001	14	.29	CD4041	14	.69	CD4503	16	.69
CD4002	14	.29	CD4042	16	.69	CD4506	16	1.29
CD4006	14	.89	CD4043	16	.79	CD4507	14	1.19
CD4007	14	.29	CD4044	16	.79	CD4508	24	1.95
CD4008	16	.89	CD4043	16	.79	CD4510	16	.85
CD4009	16	.59	CD4044	16	.79	CD4511	16	.85
CD4010	16	.49	CD4045	14	.89	CD4512	16	.85
CD4011	14	.29	CD4047	14	.89	CD4514	24	1.49
CD4012	14	.29	CD4048	16	.59	CD4515	24	1.49
CD4013	14	.39	CD4049	16	.39	CD4516	16	.89
CD4014	16	.89	CD4050	16	.39	CD4518	16	.89
CD4015	16	.39	CD4051	16	.79	CD4519	16	.59
CD4016	14	.49	CD4052	16	.89	CD4520	16	.89
CD4017	16	.79	CD4053	16	.79	CD4526	16	1.19
CD4018	16	.79	CD4056	16	2.95	CD4528	16	1.19
CD4019	16	.49	CD4059	24	3.95	CD4529	16	1.69
CD4020	16	.75	CD4060	16	.89	CD4531	16	.89
CD4021	16	.75	CD4066	14	.45	CD4538	16	1.49
CD4022	16	.75	CD4068	14	.39	CD4541	14	1.49
CD4023	14	.29	CD4069	14	.35	CD4543	16	1.19
CD4024	14	.69	CD4070	14	.29	CD4562	24	6.95
CD4025	14	.29	CD4071	14	.29	CD4566	16	2.95
CD4026	16	1.59	CD4072	14	.29	CD4583	16	2.49
CD4027	16	.45	CD4073	14	.29	CD4584	14	.59
CD4028	16	.69	CD4077	14	.35	CD4723	16	1.19
CD4029	16	.79	CD4078	14	.49	CD4724	16	1.19
CD4030	14	.39	CD4081	14	.29	MC14410	16	8.95
CD4034	24	1.79	CD4093	14	.49	MC14411	24	11.95
CD4035	16	.79	CD4094	16	1.95	MC14412	16	7.95
CD4040	16	.75	CD4098	16	1.95	MC14433	24	17.95
(More in Catalog)			CD4099	16	1.89	MC14572	16	1.19

74F00

Part No.	Pins	Function	Price
74F00	14	Quad 2-Input NAND Gate	.69
74F02	14	Quad 2-Input NOR Gate	.75
74F04	14	Hex Inverter	.89
74F08	14	Quad 2-Input AND Gate	.75
74F10	14	Triple 3-Input NAND Gate	.75
74F32	14	Quad 2-Input OR Gate	.79
74F74	14	Dual D Flip-Flop	.85
74F86	14	Quad Exclusive OR Gate	1.15
74F109	16	Dual JK Positive Edge Flip-Flop	.95
74F138	16	Expandable 3/8 Decoder	1.69
74F157	16	Quad 2-Input Multiplexer	1.69
74F158	16	Quad 2-Input Multiplexer (Inv.)	1.69
74F193	16	4-Bit Up/Down Binary Counter	5.29
74F240	20	Tri-State Octal Line Driver (Inverting)	3.75
74F244	20	Tri-State Octal Line Driver	3.49
74F257	16	Tri-State Quad 2-Input Multiplexer	1.79
74F373	20	Tri-State Octal Latch	4.89
74F374	20	Tri-State Octal D Flip-Flop	4.59

NEW

74ALS00

Part No.	Pins	Function	Price
74ALS00	14	Quad 2-Input NAND Gate	.59
74ALS02	14	Quad 2-Input NOR Gate	.59
74ALS04	14	Hex Inverter	.59
74ALS08	14	Quad 2-Input AND Gate	.59
74ALS10	14	Triple 3-Input NAND Gate	.59
74ALS30	14	8-Input NAND Gate	.59
74ALS32	14	Quad 2-Input OR Gate	.65
74ALS74	14	Dual D Flip-Flop	.79
74ALS109	16	Dual JK Pos. Edge Flip-Flop	.79
74ALS138	16	Expandable 3/8 Decoder	1.25
74ALS240	20	Tri-State Octal Line Driver (Inverting)	2.25
74ALS244	20	Tri-State Octal Line Driver	2.25
74ALS245	20	Octal Bus Transceiver (Non-Inv.)	2.59
74ALS373	20	Tri-State Octal Latch	2.59
74ALS374	20	Tri-State Octal D Flip-Flop	2.59

MICROPROCESSOR COMPONENTS

MICROPROCESSOR CHIPS

Part No.	Pins	Function	Price
D765AC	40	Floppy Disk Controller	19.95
D3242	28	Addr. Multiplexer & Refresh Counter	7.95
TMS5501	40	Synchronous Data Interface (SIRC)	14.95

Z80, Z80A, Z80B, Z8000 SERIES

Z80	40	CPU (MK3880N) (780C) 2MHz.	2.95
Z80-CTC	28	Counter Timer Circuit	3.49
Z80-DART	40	Dual Asynchronous Rec./Trans.	8.95
Z80-DMA	40	Direct Memory Access Circuit	12.49
Z80-PIO	40	Parallel I/O Interface Controller	3.49
Z80-S10/0	40	Serial I/O (TxCB and RxCB Bonded)	11.49
Z80-S10/1	40	Serial I/O (Lacks DTRB)	11.49
Z80-S10/2	40	Serial I/O (Lacks SYNCB)	11.49
Z80-S10/9	40	Serial I/O	11.49
Z80A	40	CPU (MK3880N-4) (780C-1) 4MHz.	3.49
Z80A-CTC	28	Counter Timer Circuit	4.49
Z80A-DART	40	Dual Asynchronous Rec./Trans.	9.95
Z80A-DMA	40	Direct Memory Access Circuit	12.95
Z80A-PIO	40	Parallel I/O Interface Controller	3.95
Z80A-S10/0	40	Serial I/O (TxCB and RxCB Bonded)	11.95
Z80A-S10/1	40	Serial I/O (Lacks DTRB)	11.95
Z80A-S10/2	40	Serial I/O (Lacks SYNCB)	11.95
Z80A-S10/9	40	Serial I/O	11.95
Z80B	40	CPU (MK3880N-6) 6MHz.	8.95
Z80B-CTC	28	Counter Timer Circuit	11.95
Z80B-DART	40	Dual Asynchronous Rec./Trans.	19.95
Z80B-PIO	40	Parallel I/O Interface Controller	10.95
Z8001B	48	CPU Segmented (10MHz)	79.95
Z8002B	40	CPU Non-Segmented (10MHz)	59.95

6500/6800/68000 SERIES

6502	40	MPU with Clock (1MHz)	4.95
6502A	40	MPU with Clock (2MHz)	6.49
6502B	40	MPU with Clock (3MHz)	8.95
6520	40	Peripheral Inter. Adapter	3.95
6522	40	Peripheral Inter. Adapter	5.49
6551	28	Async. Comm. Interface Adapter.	10.95
6800	40	MPU	2.95
6802CP	40	MPU with Clock and RAM	7.95
6809	40	CPU — 8-Bit (On-Chip Oscillator)	8.95
6809E	40	CPU — 8-Bit (External Clocking)	9.95
68B09E	40	CPU — 8-Bit (Ext. Clocking) 2MHz	14.95
68B10	24	128x8 Static RAM (2MHz)	5.95
6821	40	Peripheral Inter. Adapt. (MC6820)	2.95
68B21	40	Peripheral Interface Adapter (2MHz)	5.95
6845	40	CRT Controller (CRTC)	14.95
68B45	40	CRT Controller (CRTC) 2MHz.	19.95
6850	24	Asynchronous Comm. Adapter	3.95
6860	24	0-600bps Digital MODEM	7.95
68000L8	64	MPU 16-Bit (8MHz)	39.95
68488P	40	General Purpose Int. Adapter	9.95

8000/80000 SERIES

8031	40	Control Oriented CPU w/RAM & I/O	14.95
8035	40	MPU — 8-Bit	5.95
8039	40	CPU—Sgl Chip 8-Bit (128bts. RAM)	5.95
8040N-6	40	8K (2Kx8) Static RAM	9.95
8060	40	CPU — 8-Bit NMOS	14.95
8070N	40	CPU (64 bytes RAM)	19.95
8073N	40	CPU w/Basic Micro Interpreter	29.95
8080A	40	CPU	3.95
8085A	40	CPU	4.95
8086-2	40	CPU 16-bit 8MHz.	24.95
8087	40	Arithmetic Processor	189.95
8088	40	CPU 8/16-Bit	29.95
8155	40	HMOS RAM I/O Port Timer	6.95
8156	40	RAM with I/O Port and Timer	8.95
8205	24	Hi Speed 1 out of 8 Binary Decoder	3.95
8212	24	8-Bit Input/Output (74S412)	2.95
8224	16	Clock Generator/Driver	2.95
8228	28	System Cont./Bus Driver (74S428)	4.95
8237-5	40	High Perf. Prog. DMA Cont. (5MHz)	19.95
8238	24	System Controller (74S438)	4.95
8243	24	I/O Expander for 48 Series	4.95
8250N	40	Async. Comm. Element	10.95
8251	28	Prog. Comm. I/O (USART)	4.95
8251A	28	Prog. Comm. Interface (USART)	7.95
8253	24	Prog. Interval Timer	6.95
8255	40	Prog. Peripheral I/O (PPI)	4.95
8255A-5	40	Prog. Peripheral I/O (PPI) 5MHz	7.95
8259	28	Prog. Interrupt Control	5.95
8272	40	Sgle/Dble Density Floppy Disk Cont.	19.95
8274	40	Multi-Protocol Serial Cont. (7201)	29.95
8279	40	Prog. Keyboard/Display Interface	6.95
8282	20	Octal Latch	8.95
8284	18	Clock Generator/Driver	6.95
8286	20	Octal Bus Transceiver	7.95
8287	20	Octal Bus Transceiver (Inverted)	7.95
8288	20	Bus Controller	19.95
8303	20	8-Bit Table Bi-Directional Trans.	3.49
8304	20	8-Bit Bi-Directional Receiver	3.49
8310	20	Octal Latched Peripheral Driver	3.95
8741	40	8-Bit Univ. Peripheral Interface	29.95
8748	40	HMOS EPROM MPU	39.95
8749	40	MPU 8-Bit (EPROM Version of 8049)	39.95
8755	40	16K EPROM with I/O	39.95
80186-6	68	High Integration 16-Bit MPU	99.95

DISK CONTROLLERS

INS1771-1	40	Single Density	16.95
FD1791	40	Single/Dual Density (Inv.)	24.95
FD1793	40	Single/Double Density (True)	26.95
FD1795	40	Dual Density/Side Select (Inv.)	26.95
FD1797	40	Dual Density/Side Select (True)	29.95

SPECIAL FUNCTION

DS0026CN	8	Dual MOS Clock Driver (5MHz)	1.95
INS2651	28	Communication Chip	7.95
MC3470P	18	Floppy Disk Read Amp System	4.95
MM5321N	16	TV Camera Sync. Generator	9.95
MM54240N	24	Asynchronous Transmitter/Receiver	5.95
MM58167AN	24	Microprocessor Real Time Clock	9.95
MM58174AN	16	Micro. Compatible Time Clock	8.95
MM5369AA/N	8	Prog. Oscillator/Divider (60Hz)	1.79
MM5369EST	8	Prog. Oscillator/Divider (100Hz)	1.95

DYNAMIC RAMS

Part No.	Pins	Function	Price
1103	18	1024x1 (300ns)	.99
4027	16	4096x1 (250ns)	1.49
4116N-2	16	16,384x1 (150ns)	1.39 — 8/10.95
4116N-3	16	16,384x1 (200ns)	1.15 — 8/8.95
4116N-4	16	16,384x1 (250ns)	.89 — 8/6.95
4164N-150	16	65,536x1 (150ns)	5.19 — 8/40.95
4164N-200	16	65,536x1 (200ns)	4.95 — 8/38.95
MM5261	18	1024x1 (300ns)	.35 — 8/1.95
MM5262	22	2048x1 (365ns)	.10
MM5270	18	4096x1 (250ns) MK4096	4.95
MM5280	22	4096x1 (200ns) 2107	3.95
MM5298-3	16	8192x1 (200ns)	.59
41256	16	262,144x1 (200ns)	31.95

STATIC RAMS

2101	22	256x4 (450ns) 8101	1.95
2102	16	1024x1 (350ns)	.89
2102-2L	16	1024x1 (250ns) L.P. (91L02)	1.49
2111	18	256x4 (450ns) 8111	2.49
2112	16	256x4 (450ns) MOS	2.49
2114N	18	1024x4 (450ns)	1.29 — 8/9.95
2114N-L	18	1024x4 (450ns) L.P.	1.95 — 8/13.95
2114N-2	18	1024x4 (200ns)	1.39 — 8/10.95
2114N-2L	18	1024x4 (200ns) L.P.	1.69 — 8/13.49
2147HN	18	4096x1 (70ns)	4.49
2148HN	18	1024x4 (70ns)	4.95
TMS4045	18	1024x4 (450ns)	1.95
TMS40L47-45	20	1024x4 (450ns)	1.95
5101	22	256x4 (450ns) CMOS	3.95
MM5257	18	4096x1 (450ns) 4044	4.95
HM6116P-2	24	2048x8 (120ns) CMOS	7.95
HM6116LP-2	24	2048x8 (120ns) L.P. CMOS	8.95
HM6116P-3	24	2048x8 (150ns) CMOS	4.95
HM6116LP-3	24	2048x8 (150ns) L.P. CMOS	6.49
HM6116P-4	24	2048x8 (200ns) CMOS	4.75
HM6116LP-4	24	2048x8 (200ns) L.P. CMOS	5.49
HM6264P-12	28	8192x8 (120ns) CMOS	37.95
HM6264LP-12	28	8192x8 (120ns) L.P. CMOS	39.95
HM6264P-15	28	8192x8 (150ns) CMOS	34.95
HM6264LP-15	28	8192x8 (150ns) L.P. CMOS	37.95
2TL500	16	256x1 (80ns) L.P.	3.95
7489	16	16x4 (50ns) 3101	2.25
74C921	18	256x4 (250ns) CMOS	5.95
74C930	18	1024x1 (250ns) CMOS (6518)	5.95
74S189	16	16x4 (35ns) 93405	2.95
74S289	16	16x4 (35ns) 3101	2.95
82S10	16	1024x1 (50ns) O.C. (93415)	3.95
82S25	16	16x4 (50ns) O.C. (74S289)	2.25

PROMS/EPROMS

1702A	24	256x8 (1µs)	3.95
2708	24	1024x8 (450ns)	3.95
2708-5	24	1024x8 (350ns) SM00246	4.49
TMS2516	24	2048x8 (450ns) 2716	4.95
TMS2532	24	4096x8 (450ns) NMC2532	5.49
TMS2564	28	8192x8 (450ns)	10.95
TMS2716	24	2048x8 (450ns) 3 voltage	7.95
2716	24	2048x8 (450ns)	3.95
27C16	24	2048x8 CMOS	14.95
2716-1	24	2048x8 (350ns)	5.49
2716Q-5	24	2048x8 (550ns)	3.75
2732	24	4096x8 (450ns)	4.95
2732-20	24	4096x8 (200ns)	10.95
2732A-20	24	4096x8 (200ns) 21V	11.49
2732A-25	24	4096x8 (250ns) 21V	7.19
2732A-35	24	4096x8 (350ns) 21V	6.49
27C32A-30	24	4096x8 (300ns) 21V (CMOS)	22.95
2764-20	28	8192x8 (200ns) 21V	14.95
2764-25	28	8192x8 (250ns) 21V	7.19
2764-45	28	8192x8 (450ns) 21V	6.49
27C64	28	8192x8 CMOS 21V	22.95
MCM68764	24	8192x8 (250ns) CMOS	24.95
27128-25	28	16,384x8 (250ns) 128K Eprom 21V	21.95
27256-25	28	32,768x8 (250ns) 256K Eprom (14V)	99.95
74S188	16	32x8 PROM T.S. (6330-1)	1.79
74S287	16	256x4 PROM T.S. (6301-1)	1.79
74S288	16	32x8 PROM T.S. (6331-1)	1.79
74S387	16	256x4 PROM O.C. (6300-1)	1.95
74S471	20	256x8 PROM T.S. (6309-1)	4.95
74S472	20	512x8 PROM T.S. (6349-1)	4.95
74S473	20	512x8 PROM O.C. (6348)	4.95
74S474	24	512x8 PROM T.S. (DM85S296N)	4.95
74S475	24	512x8 PROM O.C. (6340)	4.95
74S476	18	1024x4 PROM T.S.	6.95
74S478	24	1024x8 PROM T.S.	9.95
74S570	16	512x4 PROM O.C. (6305)	2.95
74S571	16	512x4 PROM T.S. (6306)	2.95
74S572	18	1024x4 PROM O.C. (6352)	4.95
74S573	18	1024x4 PROM T.S. (82S137)	4.95
82S23	16	32x8 PROM O.C. (27S18)	2.95
82S115	24	512x8 PROM T.S. (27S15)	9.95
82S123	16	32x8 PROM O.C. (27S19)	2.95
82S126	16	256x4 PROM O.C. (27S20)	2.95
82S129	16	256x4 PROM T.S. (27S21)	2.95
82S130	18	1024x4 PROM O.C. (27S12)	3.95
82S185	18	2048x4 PROM T.S. (TBP24S81)	9.95
82S191	24	2048x8 (80ns)	14.95
DM82S181N	24	2048x4 PROM T.S. (82S181)	9.95
DM87S184N	18	2048x4 PROM O.C. (82S184)	9.95
DM82S185N	18	2048x4 PROM T.S. (82S185)	9.95
DM87S191N	24	2048x8 PROM T.S. (82S191)	14.95

DATA ACQUISITION

DC10		Monitor & Clock Converter +5V to −9V	2.95
ADC0801	20	8-Bit A/D Converter (1/4LSB)	14.95
ADC0803	20	8-Bit A/D Converter (−1/2LSB)	4.95
ADC0804	20	8-Bit A/D Converter (1LSB)	3.49
ADC0808	28	8-Bit A

Commodore® Accessories

RS232 ADAPTER FOR VIC-20 AND COMMODORE 64

New! New!



The JE232CM allows connection of standard serial RS232 printers, modems, etc. to your VIC-20 and C-64. A 4-pole switch allows the inversion of the 4 control lines. Complete installation and operation instructions included.

• Plugs into User Port • Provides Standard RS232 signal levels • Uses 6 signals (Transmit, Receive, Clear to Send, Request to Send, Data Terminal Ready, Data Set Ready).

JE232CM **$39.95**

VOICE SYNTHESIZER FOR APPLE AND COMMODORE



JE520AP

JE520CM

• Over 250 word vocabulary-affixes allow the formation of more than 500 words • Built-in amplifier, speaker, volume control, and audio jack • Recreates a clear, natural male voice • Plug-in user ready with documentation and sample software • Case size: 7¼"L x 3¼"W x 1-3/8"H

APPLICATIONS: • Security Warning • Teaching • Instrumentation • Telecommunication • Handicap Aid • Games

Part No.	Description	Price
JE520CM	For Commodore 64 & VIC-20	$114.95
JE520AP	For Apple II, II+, and //e	$149.95

Computer Memory Expansion Kits

IBM PC AND PC XT

Most of the popular Memory Boards (e.g. Quadram™ Expansion Boards) allow you to add an add'l. 64K, 128K, 192K or 256K. The IBM64K Kit will populate these boards in 64K byte increments. The Kit is simple to install—just insert the 9 - 64K RAM chips in the provided sockets and set the 2 groups of switches. Complete conversion documentation included.

IBM64K (Nine 200ns 64K RAMs) **$43.95**

COMPAQ • COLUMBIA • EAGLE

These PC compatibles and others use the IBM64K for memory expansion.

IBM64K (Nine 200ns 64K RAMs) **$43.95**

APPLE //e

Extended 80-Column/64K RAM Card. Expands memory by 64K to give 128K when used with programs like VisiCalc™. Fully assembled and tested.

JE864 . . . . . **$99.95**

TRS-80 MODEL I, III

Each Kit comes complete with eight MM5290 (UPD416/4116) 16K Dynamic RAMs and documentation for conversion. Model 1: 16K equipped with Expansion Interface can be expanded to 48K with 2 Kits. Model III: Can be expanded from 16K to 48K using 2 Kits. Each Kit will expand computer by 16K increments.

TRS-16K3 200ns (Model III) **$8.95**
TRS-16K4 250ns (Model 1) **$6.95**

TRS-80 MODEL IV

Easy to install Kit comes complete with 8 ea. 4164N-20 (200ns) 64K Dynamic RAMs & conversion documentation.

TRS-64K-2 (Converts from 16K to 64K) **$38.95**
TRS-64K-2PAL (8 ea. 4164 w/Special PAL Chip to expand from 64K to 128K) . . . **$59.95**

TRS-80 COLOR AND COLOR II

Easy to install Kit comes complete with 8 each 4164N-20 (200ns) 64K Dynamic RAMs and documentation for conversion. Converts TRS-80 Color Computers with D, E, ET, F and NC circuit boards to 32K. Also converts TRS-80 Color Computer II to 64K. Flex DOS or OS-9 required to utilize full 64K RAM on all computers.

TRS-64K-2 . . . . . **$38.95**

INDUSTRIES *Protect Yourself...*

DATASHIELD® Surge Protector



• Eliminates voltage spikes and EMI-RFI noise before it can damage your equipment or cause data loss • 6 month warranty • Power dissipation (100 microseconds): 1,000,000 watts • 6 sockets • 6 foot power cord • Normal line voltage indicator light • Brown out/black out reset switch

Model 100 . . . . . **$69.95**

Protect Yourself...

DATASHIELD® Back-Up Power Source



Provides up to 30 minutes of continuous 120 VAC 60Hz power to your computer system (load dependent) when you have a black out or voltage sag • Six month warranty • Weight (PC200): 24 lbs.—(XT300): 37.5 lbs.

PC200 (Output rating: 200 watts) **$299.95**
XT300 (Output rating: 300 watts) **$399.95**

❄ HAPPY HOLIDAYS! ❄

PROMETHEUS

Intelligent 300/1200 Baud Telephone Modem with Real Time Clock/Calendar



The ProModem™ is a Bell 212A (300/1200 baud) intelligent stand-alone modem • Full featured expandable modem • Standard features include Auto Answer and Auto Dial, Help Commands, Programmable Intelligent Dialing, Touch Tone™ and Pulse Dialing & More • Hayes command set compatible plus an additional extended command set • Shown w/alphanumeric display option.

Part No.	Description	Price
PM1200	RS-232 Stand Alone Unit.	$349.95
PM1200A	Apple II, II+ and //e Internal Unit.	$369.95
PM1200B	IBM PC and Compatible Internal Unit.	$269.95
PM1200BS	IBM PC & Comp. Int. Unit w/ProCom Software.	$319.95
MAC PAC	Macintosh Package. (Includes PM1200, Cable, & ProCom Software)	$399.95

OPTIONS FOR ProModem 1200

PM-COM	(ProCom Communication Software). Please specify Operating System.	$79.95
PM-OP	(Options Processor).	$79.95
PMO-16K	(Options Processor Memory — 16K).	$10.95
PMO-32K	(Options Processor Memory — 32K).	$20.95
PMO-64K	(Options Processor Memory — 64K).	$39.95
PM-ALP	(Alphanumeric Display).	$79.95
PM-CC	(Apple IIc to PM1200 Cable).	$29.95
PM-MC	(Macintosh to PM1200 Cable).	$29.95

KEYBOARDS



13⅛"L x 4¼"W x ¾"H

Mitsumi 54-Key Unencoded All-Purpose Keyboard

• SPST keyswitches • 20 pin ribbon cable connection • Low profile keys • Features: cursor controls, control, caps (lock), function, enter and shift keys • Color (keycaps): grey • Wt.: 1 lb. • Pinout included

KB54 . . . . . **$14.95**

New!



16-9/16"L x 6⅜"W x 1⅝"H

76-Key Serial ASCII Keyboard

• Simple serial interface • SPST mechanical switching • Operates in upper and lower case • Five user function keys: F1-F5 • Six finger edge card connection • Color (keys): tan • Weight: 2 lbs. • Data incl.

KB76 . . . . . **$29.95**



Apple Owners! NEW!

Apple Keyboard and Case for Apple II and II+

• Keyboard: Direct connection with 16-pin ribbon connector • 26 special functions • Size: 14½"L x 5½"W x 1½"H

• Case: Accommodates KB-A68 • Pop-up lid for easy access • Size: 15½"W x 18"D x 4¼"H

Part No.	Description	Price
KB-EA1	Keyboard and Case (pictured above).	$134.95
KB-A68	68-Key Apple Keyboard only.	$ 79.95
EAEC-1	Expanded Apple Enclosure Case only.	$ 59.95

POWER SUPPLIES



TRANSACTION TECHNOLOGY, INC. 5VDC @ 1 AMP Regulated Power Supply

• Output: +5VDC @ 1.0 amp (also +30VDC regulated) • Input: 115VAC, 60 Hz • Two-tone (black/beige) self-enclosed case • 6 foot, 3-conductor black power cord • Size: 6½" L x 7" W x 2¼" H • Weight: 3 lbs.

PS51194 . . . . . **$14.95**



Power/Mate Corp. REGULATED POWER SUPPLY

• Input: 105-125/210-250 VAC at 47-63 Hz • Line regulation: ±0.05% • Three mounting surfaces • Overvoltage protection • UL recognized • CSA certified

Part No.	Output	Size	Weight	Price
EMA5/6B	5V@3A/6V@2.5A	4⅞"L x 4"W x 2⅛"H	2 lbs.	$29.95
EMA5/6C	5V@6A/6V@5A	5⅜"L x 4⅞"W x 2⅞"H	4 lbs.	$39.95

New!



POWER PAC INC. REGULATED POWER SUPPLY

• Perfect for computer systems • Output: +5VDC @ 11 Amps, −5VDC @ 1 Amp, +12VDC @ 2 Amps, −12VDC @ 0.5 Amp and +24VDC @ 3 Amps • Overvoltage protection • Size: 12⅝"L x 6⅜"W x 4⅝"H • Weight: 17 lbs. • Spec incl.

PS2922 . . . . . **$69.95**



4-CHANNEL SWITCHING POWER SUPPLY

• Microprocessor, mini-computer, terminal, medical equipment and process control applications • Input: 90-130VAC, 47-440Hz • Output: +5VDC @ 5A, -5VDC @ 1 A; +12VDC @ 1A, -12VDC @ 1A • Line regulations: ±0.2% • Ripple: 30mV p-p • Load regulation: ±1% • Overcurrent protection • Adj: 5V main output ±10% • Size: 6⅜"L x 1⅞"W x 4-15/16"H • Weight: 1½ lbs.

FCS-604A **$69.95**



Switching Power Supply for APPLE II, II+ & //e™

• Can drive four floppy disk drives and up to eight expansion cards • Short circuit and overload protection • Fits inside Apple computer • Fully regulated +5V @ 5A, +12V @ 1.5A, -5V @ .5A, -12V @ .5A • Direct plug-in power cord included • Size: 9⅞"L x 3½"W x 2¼"H • Weight: 2 lbs.

KHP4007 (SPS-109) **$59.95**

$10.00 Minimum Order — U.S. Funds Only
California Residents Add 6½% Sales Tax
Shipping — Add 5% plus $1.50 Insurance
Send S.A.S.E. for Monthly Sales Flyer!

Spec Sheets — 30¢ each
Send $1.00 Postage for your *FREE 1985 JAMECO CATALOG*
Prices Subject to Change

MasterCard

Mail Order Electronics · Worldwide

Jameco® ELECTRONICS

VISA®

1355 SHOREWAY ROAD, BELMONT, CA 94002

12/84 ***PHONE ORDERS WELCOME — (415) 592-8097 Telex: 176043***

Apple® Accessories



5¼" APPLE™ Direct Plug-In Compatible Disk Drive and Controller Card

The ADD-514 Disk Drive uses Shugart SA390 mechanics—143K formatted storage • 35 tracks • Compatible with Apple Controller & ACC-1 Controller • The drive comes complete with connector and cable — just plug into your disk controller card • Size: 6"L x 3½"W x 8-9/16"D • Weight: 4½ lbs.

ADD-514 (Disk Drive) **$169.95**
ACC-1 (Controller Card) . . . . . **$ 49.95**

More Apple Compatible Add-Ons...

APF-1	(Cooling Fan).	$39.95
KHP4007	(Switching Power Supply).	$59.95
JE614	(Numeric/Aux. Keypad for //e).	$59.95
KB-A68	(Keyboard w/Keypad for II & II+).	$79.95
MON-12G	(12" Green Monitor for II,II+, //e, IIc).	$99.95
JE864	(80 Col. +64K RAM for //e).	$99.95
ADD-12	(5¼" Half-Height Disk Drive).	$179.95

DISK DRIVES



RFD480	(Remex 5¼" full-ht.)	$129.95
JA551-2	(Panasonic 5¼" half-ht.)	$139.95
TM100-2	(Tandon 5¼" full-ht.)	$159.95
FD55B	(Teac 5¼" half-ht.)	$149.95
SA455	(Shugart 5¼" half-ht.)	$159.95
FDD100-8	(Siemens 8" full-ht.)	$139.95
PCK-5	(5¼" Power Cable Kit)	$2.95
PCK-8	(8" Power Cable Kit)	$3.95

UV-EPROM Eraser

8 Chips - 21 Minutes



1 Chip - 15 Minutes

Erases all EPROMs. Erases up to 8 chips within 21 minutes (1 chip in 15 minutes). Maintains constant exposure distance of one inch. Special conductive foam liner eliminates static build-up. Built-in safety lock to prevent UV exposure. Compact — only 9.00"L x 3.70"W x 2.60"H. Complete with holding tray for 8 chips.

DE-4 UV-EPROM Eraser. **$74.95**
UVS-11EL Replacement Bulb. **$16.95**



NEW! Software & Documentation for CP/M Computers

JE664 EPROM PROGRAMMER 8K to 64K EPROMS — 24 & 28 Pin Packages

Completely Self-Contained — Requires No Additional Systems for Operation

• Programs and validates EPROMs • Checks for properly erased EPROMs • Emulates PROMs or EPROMs • RS232C Computer Interface for editing and program loading • Loads data into RAM by keyboard • Changes data in RAM by keyboard • Loads RAM from an EPROM • Compares EPROMs for content differences • Copies EPROMs • Power Input: 115VAC, 60Hz, less than 10W power consumption • Enclosure: Color-coordinated, light tan panels with molded end pieces in mocha brown • Size: 15⅝"L x 8¾"D x 3½"H • Weight: 5¾ lbs.

The JE664 EPROM Programmer emulates and programs various 8-Bit Word EPROMs from 8K to 64K-Bit memory capacity. Data can be entered into the JE664's internal 8K x 8-Bit RAM in three ways: (1) from a ROM or EPROM; (2) from an external computer via the optional JE665 RS232C BUS; (3) from its panel keyboard. The JE664's RAMs may be accessed for emulation purposes from the panel's test socket to an external microprocessor. In programming and emulation, the JE664 allows for examination, change and validation of program content. The JE664's RAMs can be programmed quickly to all "1"s (or any value), allowing unused addresses in the EPROM to be programmed later without necessity of "UV" erasing. The JE664 displays DATA and ADDRESS in convenient hexadecimal (alphanumeric) format. A "DISPLAY EPROM DATA" button changes the DATA readout from RAM word to EPROM word and is displayed in both hexadecimal and binary code. The front panel features a convenient operating guide. The JE664 Programmer includes one JM16A Jumper Module (as listed below).

JE664-A EPROM Programmer. **$995.00**
Assembled & Tested (Includes JM16A Module)

JE665 — RS232C INTERFACE OPTION — The RS232C Interface Option implements computer access to the JE664's RAM. This allows the computer to manipulate, store and transfer EPROM data to and from the JE664. A sample program listing is supplied in MBASIC for CP/M computers. Documentation is provided to adapt the software to other computers with an RS232 port. 9600 Baud, 8-bit word, odd parity with 2 stop bits.

EPROM Programmer w/JE665 Option JE664-ARS. $1195.00

Assembled & Tested (Includes JM16A Module)

EPROM JUMPER MODULES — The JE664's JUMPER MODULE (Personality Module) is a plug-in Module that pre-sets the JE664 for the proper programming pulses to the EPROM and configures the EPROM socket connections for that particular EPROM.

JE664 EPROM Jumper Mod. No.	EPROM	Programming Voltage	EPROM MANUFACTURER	PRICE
JM08A	2708	25V	AMD, Motorola, Nat., Intel, TI	$14.95
JM16A	2716, TMS2516 (TI)	25V	Intel, Motorola, Nat., NEC, TI, AMD, Hitachi, Mostek	$14.95
JM16B	TMS2716 (3-V's)	-5V, +5V, +12V	Motorola, TI	$14.95
JM32A	TMS2532	25V	Motorola, TI, Hitachi, OKI	$14.95
JM32B	2732	25V	AMD, Fujitsu, NEC, Hitachi, Intel, Mitsubishi, National	$14.95
JM32C	2732A	21V	Fujitsu, Intel	$14.95
JM64A	MCM68764, MCM68L764	21V	Motorola	$14.95
JM64B	2764	21V	Intel, Fairchild, OKI	$14.95
JM64C	TMS2564	25V	TI	$14.95

AB Computers

THE VALUE LEADER SINCE 1976

SANYO

SANYO

Sanyo 550 & 555 PC's. Built-in software includes MDOS Version II, Wordstar, Calc-Star, Basic, more. Great Prices.

Computer	Ram	Drive	Price
550-1	128K*	180K (1 drive)	$895.
550-2	128K*	360K (1 drive)	950.
555-1	128K*	360K (2 drives)	1075.
555-2	128K*	720K (2 drives)	1275.

*EXPANDABLE TO 256

ZENITH data systems

All Zeniths fully software & hardware compatible with the PC and XT . . . superior keyboard:

Computer	Ram	Drive	Ports	Price
ZF-151-21	128K	360	1PL/2 SER	CALL
ZF-151-52	320K	720 (2 drives)	1PL/2 SER	CALL
ZW-151-52	320K	10.6 MB + 360	1PL/2 SER	CALL
ZF-161-21*	128K	360	1PL/2 SER	CALL
ZF-161-52*	320K	720 (2 drives)	1PL/2 SER	CALL

*Portable

Panasonic



PANASONIC 1090
Friction & tractor, excellent correspondence mode, Epson code compatible ..... $239.

commodore commodore

WC 6420 Auto Modem (also available for Atari & Apple at slightly higher price) ..... $ 65.
Tech Sketch Light Pen & Micro Illustrator ..... 44.
MSD Superdrives, single and dual CALL
CBC 4/12 Analog to Digital 4 Chan/12 Bit ..... 179.
Typing Tutor III w/Letter Invaders ..... 35.
(Also for Apple & IBM)
Paper Clip Word Processor CBM/C64 ..... 60.
80 Column Display Card by "Batteries Included" ..... 149.
Oracle (Consultant) Data Base by "Batteries Included" ..... 89.
BusCard II by "Batteries Included" ..... 149.
Cable from BusCard to Parallel Printer ..... 25.
All other "Batteries Included" items in stock ..... CALL
FORTH for PET/C 64 (Full Fig. Model) by Cargile/Riley ..... 50.
Ditto Disk 64 (copy discs even if original is copy protected) ..... 36.
STAT for PET/CBM/C64 ..... 95.
Comprehensive Statistical Analysis Routines
★ **AB's C64 Upgrade Kit:** Includes BusCard II, IEEE Cable & MSD Superdrive ..... 319.
KMMM PASCAL IV.1 (C64/PET) ..... 95.
NEW 64 + PASCAL ..... CALL
FLEX-FILE II — User friendly. Set-up and maintain data base. Includes report writer & mail label routines ..... 59.
Petscan—Connect up to 37 CBM/PET computers as networked cluster to shared drives & printers ..... CALL
C-Scan—Connect up to 8 computers (C 64, VIC 20, or similar buss) to shared drives and printers ..... 125.

OTHER COMPUTER SPECIALS

IBM PC and PC XT in stock available at special prices ..... CALL
ALSPA 8" CPM Computers. 64K memory workhorse at super special prices.
1/SS ..... as low as $500.
2/SS ..... $700. 2/DS ..... $1,000.
Franklin Ace — not many left, super prices ..... CALL
Commodore—full line ..... CALL

DISKS & ACCESSORIES

Price per 5¼" Disk

3M Qty.	SS/DD	DD/DD	SS 96 TPI	DS 96 TPI	AT H DENS
200	$1.55	2.14	3.16	3.49	CALL
100	1.59	2.19	3.22	3.56	CALL
10	1.62	2.23	3.29	3.63	CALL

VERBATIM Qty.	SS/DD	DD/DD	SS 96 TPI	DS 96 TPI	AT H DENS
200	$1.61	2.17	3.29	3.63	CALL
100	1.65	2.22	3.36	3.71	CALL
10	1.68	2.26	3.43	3.78	CALL

MAXELL Qty.	SS/DD	DD/DD	SS 96 TPI	DS 96 TPI	AT H DENS
200	$1.93	2.56	2.74	3.43	5.04
100	1.97	2.61	2.80	3.50	5.15
10	2.01	2.66	2.86	3.57	5.25

30 MacIntosh 3½" diskettes in Amaray diskbank ..... $135.



***AB's OWN DISKETTES**—top disk quality at a low, low price . . . buy 100 (DS/DD) and pay only **$1.50 per disk.**

Plus, before February 28, get a free **Amaray** Mediamate 5 disk file in the bargain!

AB carrys all major brands . . . 3M, Verbatim, Maxell, Wabash, BASF, Sentinel, Dysan . . . in all popular sizes and configurations. CALL for super prices.

DISK STORAGE
Mini Flip 'N File (50 5" disks) $17.45
Rolltop 100 (100 disks, 10 dividers) 28.99
Mini Kas-ette/10 (for 5" disks) 1/2.25 ..... 10/2.05 ea.
* **Amaray Mediamate 5** 11.99
Innovative Concepts—fold out style for 5" disks:
Flip 'N File/25 ..... 16.50
Flip 'N File/50 ..... 22.95
Smith & Bellows Wooden Storage Boxes for 5" disks. Natural or dark finish.
For 50 disks ..... 18.
For 70 disks ..... 21.
For 100 disks ..... 24.
PLUS—"HEAD" disk cleaning kit (w/2 disks) 11.99
IBM drive analyzer (Verbatim) 22.50

SOFTWARE HIT PARADE

Master Type (Scarborough) ..... $22.
Math Blaster! (Davidson) ..... 35.
Typing Tutor III (S&S) ..... 35.
Alphabet 200 (Spinnaker) ..... 22.
Success with Math (CBS) ..... 18.
Typing Tutor II (Microsoft) ..... 18.
Algebra I (Peachtree) ..... 22.
Story Machine (Spinnaker) ..... 22.
Word Attack! (Davidson) ..... 35.
Get Organized! (Electronic Arts) ..... 159.
Spotlight (Software Arts) ..... 120.
Microsoft "Word" (w/Mouse) ..... 325.
Unix Operating System for PC ..... CALL
Copy PC ..... 29.
Flight Simulator II (Sub Logic) ..... 39.
1-2-3 (Lotus) ..... 299.
PFS:File (Software Pbshg.) ..... 89.
Symphony (Lotus) ..... 499.
PFS:Report (Software Pbshg.) ..... 79.
PFS:Write (Software Pbshg.) ..... 89.
dBase III (Ashton-Tate) ..... 489.
dBase II (Ashton-Tate) ..... 349.
Framework (Ashton-Tate) ..... 489.
Multimate (Multimate) ..... 320.
Chart (Microsoft) ..... 179.
Multiplan (Microsoft) ..... 129.
Wordstar (Micropro) ..... 335.

***Personal Pearl (pearlsoft)**—Database filing/reporting system for personal productivity. Manipulate database thru simple English sentence commands. Great for beginner or pro. Super business aid. Includes functions for bookkeeping, general ledger, billings management, mail list, sales analysis, budget planning, more ..... $235.

We carry full software lines by Electronic Arts, Scholastic, Scarborough, PFS, Spinnaker, Batteries Included, Others. If you don't see it here, CALL.

MONITORS

USI—20 Mhz band width, 1000 lines resolution. Easily capable of 80 character display.
★ **1200G (Pi-2)p12" green phosphor SPECIAL** ..... $85.
★ **1200A (Pi-3)-12" amber phosphor SPECIAL** ..... 89.

AMDEK
Video 310A-12" amber, 18 meg. TTL-IBM ..... $155.

ZENITH
ZVM-124-12" amber—22 MHz, TTL for IBM ..... $150.
ZVM-135-High res. RGB + composite monitor ..... 470.
ZVM-135-1-Cable for RGB monitor ..... 23.

PANASONIC
12" Green 20 MHz (Sound) ..... $137.
12" Amber 20 MHz (Sound) ..... 145.

ELECTROHOME
ECM 1226-12" Green ..... $95.
ECM 1302-1-13" Color RGB ..... 195.
ECM 1302-2-13" Color (Hi Res.) ..... 330.

POWER DEVICES

Datashield back-up power source
200 PC-200 watt ..... $265.
300 XT-300 watt ..... 390.
"BITS" Power back-up-250W True uninterruptable ..... 695.
Brooks 6 Outlet—Surge Suppressor/Noise Filter ..... 54.
Computer Power Inc.-500 VA ..... 1320.
Tripp Lite 425 VA ..... 390.

OUTPUT DEVICES

Printers by Star, Epson, C. Itoh, Amdek, Panasonic, Okidata, Diablo, Brother:
Star Micronics Gemini 10X —10" carriage, F/T 120 CPS ..... $258.
Epson LQ-1500-NEW 24-pin letter quality dot matrix ..... CALL
Epson RX-80-Tractor Feed, Graftrax + ... 289.
Okidata 92 ..... CALL
Amdek Printers
5025-25 CPS Daisywheel, 2K Buffer ..... CALL
5040-40 CPS Daisywheel, 2K Buffer ..... CALL
5055-55 CPS Daisywheel, 2K Buffer ..... CALL
Brother HR-35 Daisywheel-25 CPS Bi-Directional ..... 889.
Brother HR-25 Daisywheel-23 CPS Bi-Directional ..... 649.
Brother HR-15 Daisywheel-13 CPS Bi-Directional ..... 389.
Star Radix 10 ..... 600.
Star Radix 15 ..... 695.
C. Itoh
Prowriter I (Parallel) ..... CALL
Starwriter (40 CPS) ..... CALL
Diablo 620 (Daisywheel) ..... CALL
IBM Parallel Printer Cable ..... 19.

COMMUNICATIONS

Mark X Auto Dial/Auto Answer ..... $119.
Anchor Mark XII Smart modem ..... 265.
Hayes Smartmodem 1200B (includes Smartcom II software) ..... 459.
Hayes SmartModem 1200/300 ..... 529.
"Crosstalk" software ..... 135.
★ **Voad keyboard-phone software for IBM PC and compatibles. Features mail merge, call reporting, "Note Pad" and more** ..... CALL

/ETC.

Panasonic, Amdek, Hitachi & Other — ½ height, double side drives ..... from $149.
★ **Data Technology TeamMate Drive**-super new system. Puts 3.3 MB on 5¼" floppy. Formats to 2.8. For PC XT owners, an alternative to hard disk. 4 disks back-up 10 megabytes ..... CALL
★ **Winchester Drives** (10 MB) ..... 799.
Quadram Quadboard—Parallel port, serial port, clock/calendar.
No RAM-$299, w/64K-$379, w/384K-$499
★ **AMDEK MAI graphics card for IBM PC** ..... 200.
Hercules graphics board ..... 359.
Votrax speech synthesizers—Personal Speech System ..... 249.
AST—full line of IBM cards & boards . CALL
Keytronics 5150 keyboard ..... 179.
Hewlett Packard calculators, all models: LOW, LOW PRICES ..... CALL
Koala Pad (w/software) ..... 98.
4164 Chip-Memory expansion for IBM, 64K ..... 39.
Interface Cables—6, 10, 12 ft, all popular connectors ..... CALL
(Dealer inquiries invited)

ORDER LINE, 9 AM-6 PM EST

800-822-1211

(IN PA., 215-822-7727)

CUSTOMER SERVICE

215-822-7727

VISA MasterCard

AB Computers

252 BETHLEHEM PIKE
COLMAR, PA 18915

Ordering Information: Order by check, MasterCard or VISA. Personal checks take 15 days to clear: no waiting on certified checks or money orders. Add 3% shipping and handling on all orders (minimum $2.00). Mail, APO/FPO. Air may require additional charges. PA residents add 6% sales tax, MA residents add 5%. All items subject to availability. Prices subject to change. Additional discounts available to qualified educational institutions. Requests for bid on volume requirements invited.

FREE CATALOG!
This ad space can accommodate only a few of the exceptional values available from AB. Our latest catalog is packed with fantastic buys, top brands, thousands of items. For a free copy call or write.

Inquiry 5

BY CHARLES BIGELOW

FONT DESIGN FOR PERSONAL WORKSTATIONS

Better fonts mean greater legibility and productivity

Business users are increasingly suspicious about the automated office. It has not provided the increase in productivity that system vendors promised. One reason for its failure is that the fonts on business systems have not been as legible as the traditional typefaces familiar to the office worker.

When a vendor claims that the fonts on a system are "pretty good" or "close enough" or "almost correspondence quality," this is the same as saying that the fonts are less than optimum and that the vendor has short-changed the reader on legibility. Considering the amount of time office workers spend reading digital fonts, anything less than the highest possible quality is counterproductive.

Until recently, few remedies were available for the problems caused by poor font designs for personal computers. The character-generator technology still used to produce letterforms on most computer terminals usually provides a single size of a single style of coarse-resolution dot-matrix letters. Character-generator technology usually does not let the user modify the fonts because the character images are contained in hardware or firmware.

Moreover, the designs of such fonts are often the work of people untrained in letterform design, while traditional lettering artists have rejected computers because the tools and output media of digital typography have been so clumsy and crude. The result is that most existing workstation fonts are not designed for optimum legibility even within the limitations of the technology.

Computer literacy has therefore been a good deal less pleasant and productive for the reader than traditional scribal and typographic literacy. The hackerish look of dot-matrix fonts on screens and printers has partially prevented full acceptance of computers as tools for a literate public.

Today, however, the look of computer fonts is undergoing a major change. The newer raster-based technologies of bit-mapped display and nonimpact printing offer potential solutions to many of the technical and aesthetic problems with digital fonts. These technologies can produce digital font images that more closely

(continued)

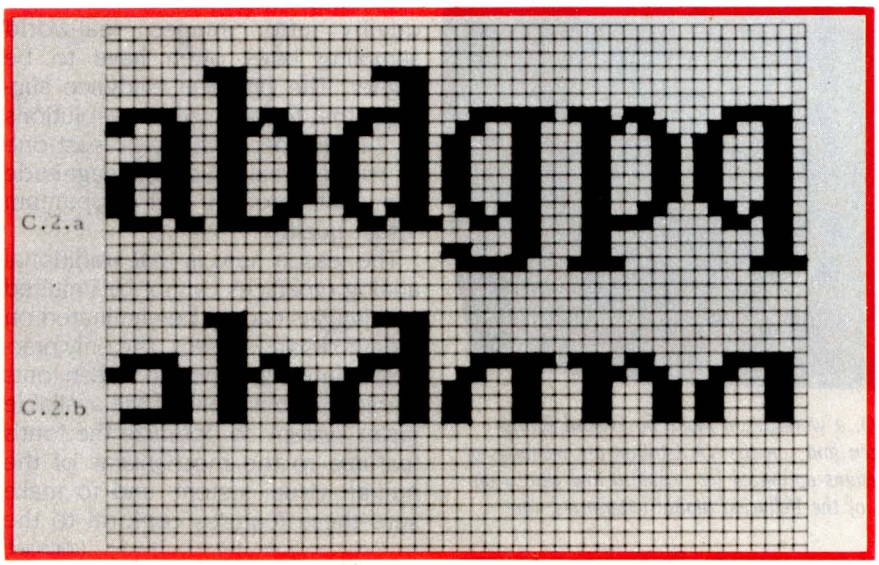

Charles Bigelow is Assistant Professor of Computer Science and Art at Stanford University. A MacArthur Foundation Prize Fellow, he organized the international seminar "The Computer and the Hand in Type Design" at Stanford in 1983. You can write to him at Stanford University, Department of Computer Science, Stanford, CA 94305.

resemble traditional analog typefaces.

The secret of designing digital fonts is to adhere to the principles of readability found in traditional letterform designs, while tuning the features and details of the design to the digital medium (for an example, see photo 1).

READABILITY

The resolutions of common bit-mapped screen displays range from 60 to 100 lines per inch, with an average of approximately 72 lines per inch. This is about one-tenth the resolution of average-quality digital typesetters used in the graphic arts and publishing industry.

It is a truism that communication of information is most effective and economical when the characteristics of the transmitter match those of the receiver. In literate communication, the transmitter is the system that produces the text image, and the receiver is the human visual system. The digital text image must contain as much resolution as the eye and brain can receive and interpret but need not contain more information than that.

There is a way to estimate the theoretical minimum resolution for good-quality digital text. Experiments by psychophysicists and perceptual psychologists suggest that the visual system cannot detect spatial frequencies greater than 60 cycles per degree of visual angle. That is, the visual system perceives a bar grating of regularly spaced black and white lines as solid gray if the spacing is so fine that more than 60 black and white line pairs are imaged in one degree of visual angle as measured at the retina. This provides a measure of the upper limits of the visual system's ability to resolve the kind of detail produced by a digital raster. At a reading distance of approximately 12 inches, 60 cycles per degree of visual angle is equal to a resolution of 300 cycles per inch at the screen.

We can now estimate the minimum resolution necessary for good-quality digital text by using a principle of digital signal-processing theory developed by Harry Nyquist at Bell Laboratories in the 1920s. It states that a signal can be digitally sampled and reconstructed without loss or distortion if the sampling rate is at least twice the rate of the highest frequency in the original signal. This minimum sampling rate is known as the Nyquist limit or Nyquist rate. Sampling below the Nyquist limit introduces aliasing, in which the high-frequency components of the original signal are erroneously reproduced as spurious lower-frequency components of the reconstructed signal. In digital typography, one form of these aliases is the jaggies—the jagged stair-step patterns that fringe the edges of digital type.

To faithfully sample and reconstruct a signal of 300 cycles per inch, you need a minimum sampling rate of 600 lines per inch. In fact, resolutions in the range of 600 to 720 lines per inch were used for many common digital typesetting devices developed during the late 1960s and the 1970s. A decade of experience with these machines showed that this resolution range was adequate for low- and medium-quality printing such as newspapers, telephone books, and magazines, but not for the highest-quality typesetting and printing, which required digital resolutions of 1200 or more lines per inch.

The Nyquist limit is only a theoretical minimum, and for high-quality letter images, real-world sampling rates often have to be higher. The practical evidence suggests that today's screen resolutions of 72 lines per inch are at least one or two decimal orders of magnitude too low to produce text of optimum visual quality.

The lesson here is that traditional analog typefaces cannot be imitated and jaggies cannot be eliminated on today's display screens. The only practical solution is to design screen fonts within the limitations of the available raster system, to optimize the font's features to the mechanisms of the human visual system, and to make sure these features conform to the

(continued)

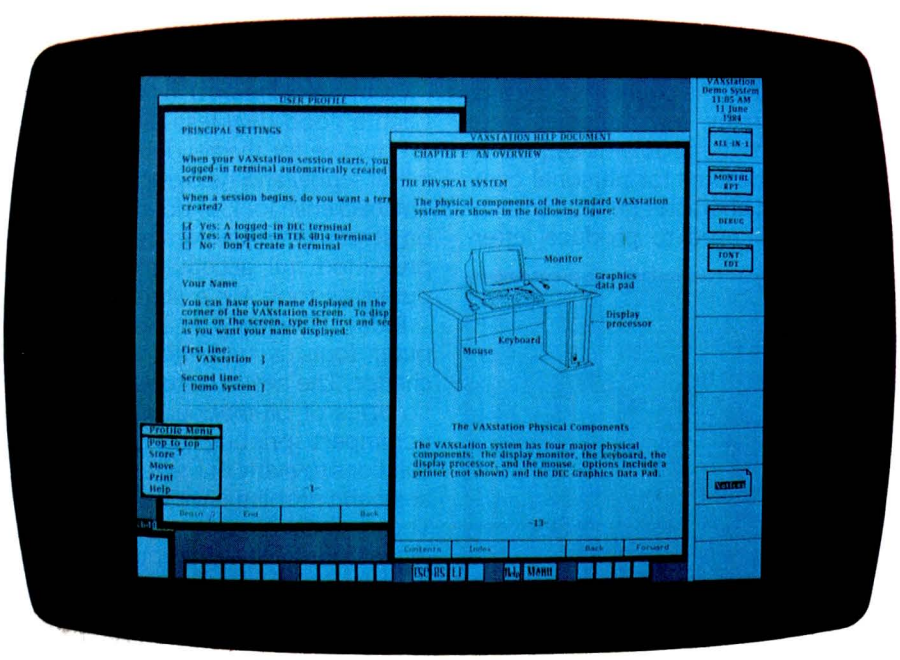

Photo 1: *Display screen of the* VAXstation 100, *a workstation made by Digital Equipment Corporation. The proportionally spaced screen fonts on the* VAXstation *are members of the Pellucida family, a set of original typeface designs optimized for legibility and clarity on bit-mapped computer displays. The characteristics of the Pellucida digital letterforms were developed by Charles Bigelow and Kris Holmes.*

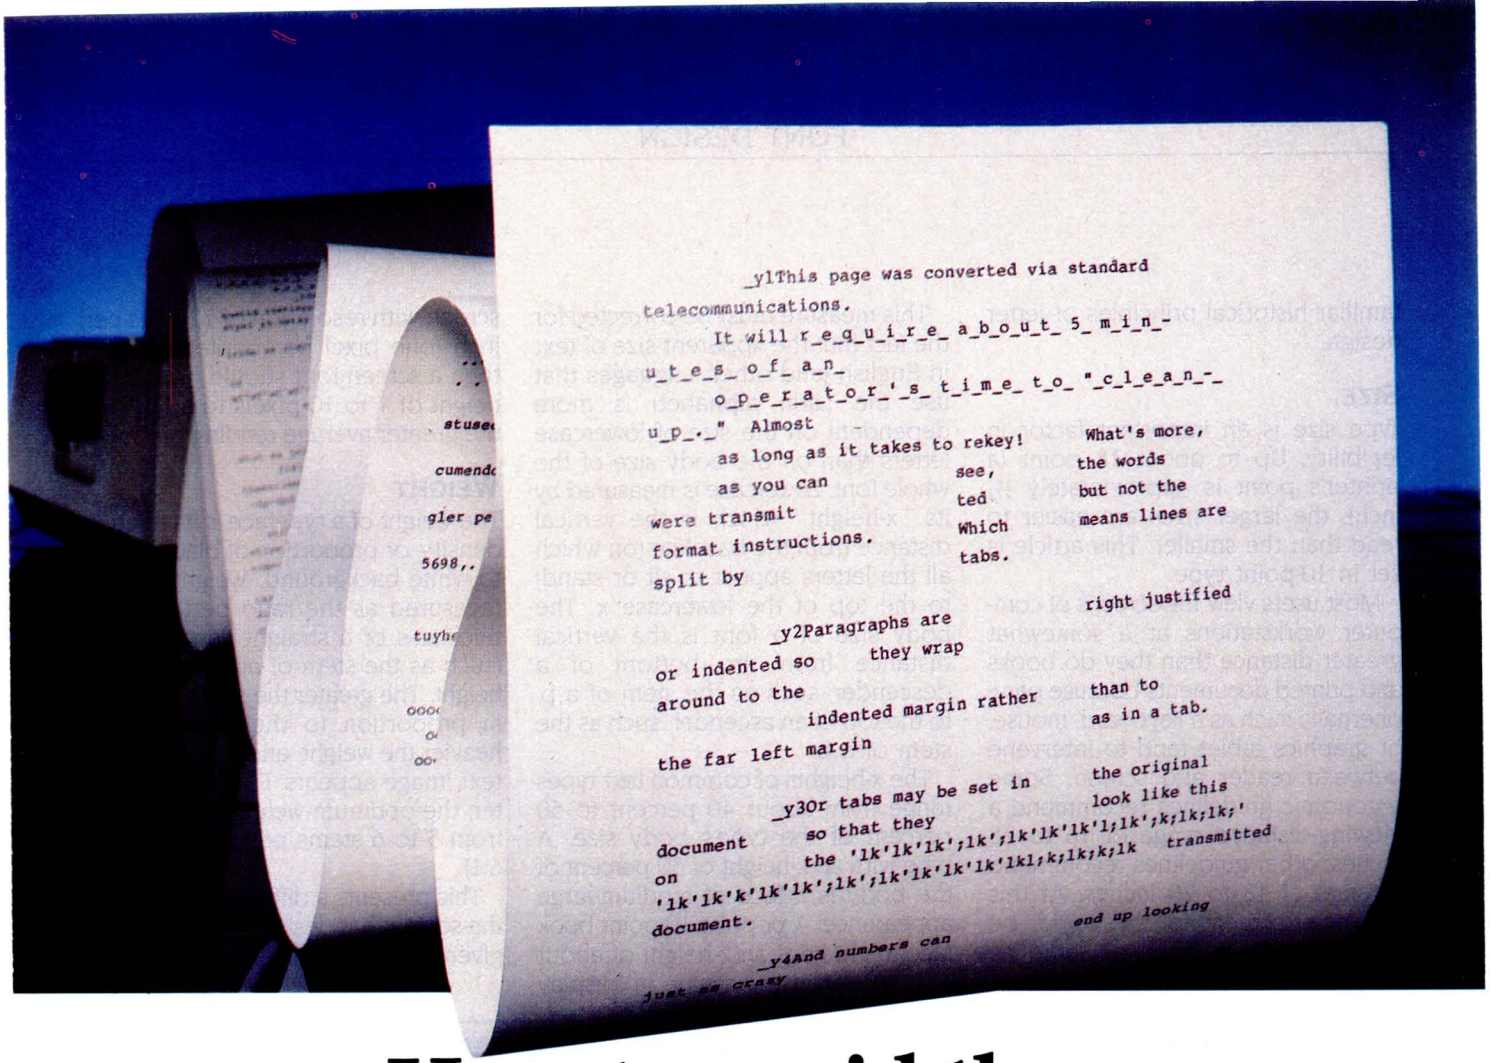

How to avoid the document conversion trap.

Now, in just minutes, you can convert a full diskette *without losing headers, footers, tabs, underlines or any other formatting codes.*

And without cleanup.

Announcing the KEYWORD 7000. A revolutionary new breakthrough in document conversion.

It's finally happened. Keyword has discovered the key to document conversion. Now documents can be transferred to and from all major office automation systems in letter perfect order. *Automatically.*

What's more, simple on-screen prompts and a special "HELP" feature key make the KEYWORD 7000 extremely easy to operate. In fact, even a beginner can learn to use the 7000 in minutes.

Plus, the KEYWORD 7000 costs just pennies a page, compared to service bureaus at $3 a page. Or rekeying at about $4.50 per page.

But that's just the beginning. To find out more about how the KEYWORD 7000 can help you avoid the conversion trap, call 1-800-227-1817 (ext. 801A) and get your free booklet: *How to Win the Compatibility Battle. Exciting New Facts about Today's Office Automation Compatibility Solutions.* Or fill in—or attach your business card to—the tear-off coupon. And mail it to the address below.

Call 1-800-227-1817 (ext. 801A) for your free booklet.

Keyword Office Technologies, Inc. Inquiry 195
25354 Cypress Avenue • Hayward, California 94544



Keyword Office Technologies, Inc.
25354 Cypress Avenue
Hayward, California 94544

801A2

Yes! I want to find out more about the KEYWORD 7000, an exciting new breakthrough in document conversion.

☐ Call me ASAP at
(____)_____ Ext_____.

☐ Send me your free booklet.

Name _____

Title _____

Company _____

Address _____ M/S _____

City _____ State _____ Zip _____

Phone (_____)_____ Ext. _____

Fill in and mail this coupon (Or attach your business card) *TODAY*. Or call 1-800-227-1817 (ext. 801A).

KEYWORD

familiar historical principles of letter design.

Size

Type size is an important factor in legibility. Up to about 18 point (a printer's point is approximately 1/72 inch), the larger sizes are easier to read than the smaller. This article is set in 10-point type.

Most users view the screens of computer workstations at a somewhat greater distance than they do books and printed documents because paraphernalia such as a keyboard, mouse, or graphics tablet tend to intervene between reader and screen. Some ergonomic guidelines recommend a viewing-distance range of 16 to 28 inches; other guidelines recommend a range of 13 to 20 inches. At this distance, screen fonts should be about 1.2 to 2 times as large as printed text fonts.

This measure must be corrected for the fact that the apparent size of text in English (and other languages that use the Latin alphabet) is more dependent on the size of lowercase letters than on the body size of the whole font. Lowercase is measured by its "x-height," which is the vertical distance from the baseline (on which all the letters appear to sit or stand) to the top of the lowercase x. The body size of a font is the vertical distance from the bottom of a descender, such as the stem of a p, to the top of an ascender, such as the stem of a b.

The x-heights of common text types range from about 40 percent to 60 percent of the type's body size. A type with an x-height of 50 percent of the body is a face of medium-large appearance. A popular 10-point book face might have an x-height of about 5 points. If we assume a display screen with resolution of 72 lines per inch (one pixel per printer's point), then a screen font should have an x-height of 7 to 10 pixels to adjust for the greater average reading distance.

Weight

The weight of a typeface is its relative density, or proportion of black image to white background. Weight can be measured as the ratio between the thickness of a straight vertical stem (such as the stem of an l) and the x-height. The greater the stem thickness in proportion to the x-height, the heavier the weight, and the darker the text image appears. For printed matter, the optimum weight ratio ranges from 5 to 6 stems per x-height (5:1–6:1).

This presents a difficult problem for the screen font designer. For example, given an x-height of 7 pixels, a stem

(continued)



"Now when I talk, my broker listens."

No matter what kind of investing you do, there is a Dow Jones Software product that will make you and your broker a better team.

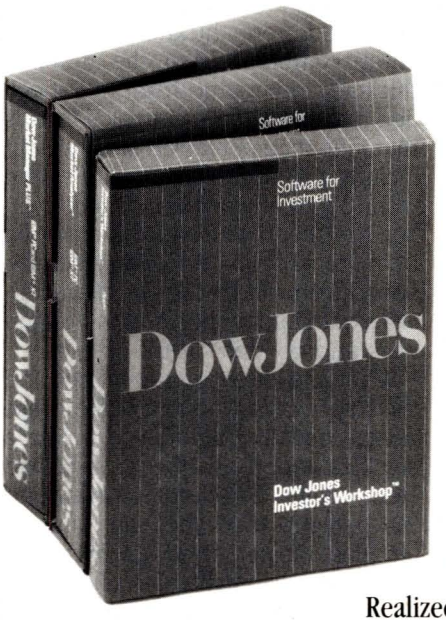

Dow Jones Market Manager PLUS™

is a powerful portfolio management system for serious investors. It allows you to easily monitor and account for your security transactions while providing printed reports for review and tax records. These reports include Holdings by Portfolio, Holdings by Security, Realized Gain/Loss and Dividend Transaction.

Dow Jones Investor's Workshop™

is the perfect software for private investors who want an introduction to the world of computerized investing. The Investor's Workshop creates reports and charts that give you a clear picture of the performance of your investments. It enables you to become more proficient in portfolio management and technical analysis.

Dow Jones Market Analyzer™

is designed for sophisticated investors who chart stocks. The Market Analyzer stores historical quotes and updates daily data on your securities. It constructs comparison and price and volume charts, allowing you to test theories, identify trends and improve the timing of your investment decisions.

Each of these programs communicates with Dow Jones News/Retrieval,® the leading electronic information service.

DowJones Software™

For more information, mail coupon or call:
1-800-345-8500 ext. 48
(Alaska, Hawaii and foreign call: 1-215-789-7008 ext. 48)

Dow Jones Investor's Workshop available for Apple® IIc, Apple® IIe and Apple® II Plus.
Dow Jones Market Manager PLUS available for IBM® PC, Apple® II and Apple® Macintosh™
Dow Jones Market Analyzer available for IBM PC, IBM® XT, Apple II and TI Professional.

Dow Jones News/Retrieval is a registered trademark of Dow Jones & Company, Inc. Dow Jones Software, Dow Jones Investor's Workshop, Dow Jones Market Manager PLUS and Dow Jones Market Analyzer are trademarks of Dow Jones & Company, Inc. Copyright © 1984 Dow Jones & Company, Inc. All Rights Reserved.

For more information on Dow Jones Software, send this coupon to: Ms. Lynn Filippone, Dow Jones & Company, Inc., P.O. Box 300, Princeton, NJ 08540.

Yes, please send me more information. I am particularly interested in:
- ☐ Dow Jones Investor's Workshop™
- ☐ Dow Jones Market Manager PLUS™
- ☐ Dow Jones Market Analyzer™

Name _____

Address _____

City _____ State _____ Zip _____

Phone number(s) _____

B1

Inquiry 130

EXPOTEK
1-800-528-8960
ORDER LINE
Guaranteed Low Prices

All prices are for cash, cashiers check or money order. Allow 4 weeks bank clearance for personal checks. C.O.D.'s, Visa, MC, and P.O.'s accepted at additional charge. Prices subject to change. Returns must have authorization number and are subject to a restocking charge.

COMPUTERS & TERMINALS

ADDS	QUME
ALTOS	SANYO
APPLE	TELEVIDEO
ESPIRIT	VISUAL
NEC	WYSE
NORTHSTAR	ZENITH

SWITCH BOXES

2 POS RS232	$75
4 POS RS232	115
2 POS Centronics	93
4 POS Centronics	121

MODEMS

Novation-J-Cat	99
Smart Cat	399
Hayes Smart Modem 300/1200	219/479
1200B	429
Anchor Volksmodem	Call
Signalman Mark VII/XII	119/299
Qubie Internal/RS232	269/285

ACCESSORIES

AST latest boards	Call
Chips & Microprocessors	Call
GSI Surge Protector	59
Hercules Graphics Card	369
Kraft Joysticks (IBM or Apple)	35
Paradise Multidisplay Card	379
Printer Buffers & Spoolers	Call
Quadram all products	Call
Ribbons (doz.) & Printwheels	Call
Standby Power Systems	Best Price
Tractors & Sheetfeeders	Call

DISK DRIVES

Alpha Omega 10MB w/controller (IBM)	799
TEAC 55B slimline DSDD	149
TEAC 55F slimline DSQD	249
Bernoulli Box	1949
Tandon 100-2	199
Maynard 10MB-WS-2 with EPROM	1149
Tallgrass Tech Hard Disk System	Call
Microsci A2 (Apple)	189
CDC, Qume, Shugart	Call

MONITORS

Amdek	Call
Leading Edge Color RGB	399
PGS-HX-12	459
PGS MAX-12 Amber	169
Zenith 122/123	89

PRINTERS

C. Itoh		Juki	
1550 AP	499	6100	429
1550 BCD	549	Okidata	
8510 AP	319	All Models	Call
8510 BC2	419	Panasonic	
8510 BPI	389	All Models	Call
A10-20	449	Qume	
F10-40	899	Letter Pro	629
F10-55	1199	11/40 WIBM IF	1369
Daisywriter		11/55 WIBM IF	1569
2000	985	Star Microtronics	
Diablo		All Models	Call
620 API	739	Tally	
630 API	1699	160L w/Tractor	Call
630 ECS	1999	Toshiba	
Epson		1340	749
All	Call	1351	1359

NEC • NEC • NEC • NEC • NEC • NEC • NEC

P2	515	3550	1489
P3	739	7710	1639
2050	779	8850	1799
P2/P3 Parallel Int. Face	139		

2017 E. Cactus, Phoenix, AZ 85022
(602) 482-0400

weight of one pixel is too light, but a stem weight of two pixels is too heavy. The digital raster cannot permit non-integer stem weights, and thus an optimum ratio seems impossible.

However, on a computer screen the perceived stem thickness is almost always different from the nominal thickness computed from the specified raster resolution. Physical factors that influence perceived stem weight include the size and intensity of the writing spot, the amount of spot overlap, the speed with which the writing beam turns from on to off versus the speed from off to on, the characteristics of the phosphor, and the brightness and contrast of the display.

When the letterforms are black and the screen background is white, these factors usually combine to erode a significant portion of the perceived stem weight. If this erosion is around 20 percent total (not an unusual amount), the perceived weight ratio of a font with x-height of 7 pixels and stems of 2 pixels would be approximately 4.4:1. While rather dark, this is preferable to a one-pixel stem, which would produce a weight ratio of 8.7:1—far too light and spindly. A larger x-height of 9 pixels with a stem of 2 pixels would, under the same conditions, yield a perceived weight ratio of 5.6:1, within the optimum range.

Thus, an interaction occurs between font size, as measured by x-height, and stem thickness that makes some size/stem combinations significantly more legible than others. A font designer has to filter the matrix of all possible low-resolution digital fonts to pass only those of acceptable weight ratios.

Contrast

In traditional text typefaces and lettering based on the Latin alphabet, vertical letter elements are thicker than horizontal elements. The stems of an n are thicker than the serifs or the connecting arch; the vertical bowls of an o are thicker than the horizontal hairlines. This difference between vertical and horizontal features is called contrast. Faces with high contrast have a brilliant, glittery look, and faces with low contrast have a stolid, monotonous look.

For screen fonts to have some of the legibility of traditional typefaces, the traditional contrast must be preserved. Fonts in which the vertical and horizontal elements are the same thickness have an unfamiliar texture; this unfamiliarity impairs legibility.

When both horizontals and verticals are only one pixel in thickness on a CRT display and the letters are black on an illuminated background, the legibility problem is exacerbated by the erosion of vertical stems, which become even thinner than horizontals, contrary to the reader's visual expectations. Such fonts not only appear weak and spindly, they seem unclear and ill-defined, as though the reader's vision is blurred or something is misadjusted on the display screen. What is actually blurred and misadjusted is the font's design. However, thicker stems require a larger x-height to maintain the proper font weight, so there is a lower limit to the size at which contrast can be implemented on a screen font.

Spatial Frequency

I have discussed visual spatial frequency as a means of estimating the visual system's limits of sensitivity, but the lower spatial frequencies in text are even more important. Many psychophysical experiments suggest that the human visual system is most sensitive to spatial frequencies in the range from 2 to 6 cycles per degree of visual angle. A line of text contains multiple spatial frequencies; the fundamental one is the regular alternation of black vertical stems with intervening white counters (the space inside a letter like n or o) or inter-letter spaces.

Estimates of the fundamental spatial frequencies of printing types at text sizes show a range from 4 to 6 cycles per degree of visual angle, which is within the range of the visual system's peak sensitivity. When large text sizes (such as those used in luxury books where typographic econ-

(continued)

THE FORTH SOURCE™

MVP-FORTH

Stable – Transportable – Public Domain – Tools

You need two primary features in a software development package . . . a stable operating system and the ability to move programs easily and quickly to a variety of computers. MVP-FORTH gives you both these features and many extras. This public domain product includes an editor, FORTH assembler, tools, utilities and the vocabulary for the best selling book "Starting FORTH". The Programmer's Kit provides a complete FORTH for a variety of computers. Other MVP-FORTH products will simplify the development of your applications.

MVP Books – A Series

- ☐ **Volume 1,** *All about FORTH* by Haydon. MVP-FORTH glossary with cross references to fig-FORTH, *Starting FORTH,* and FORTH-79 Standard. 2nd Ed. $25
- ☐ **Volume 2,** *MVP-FORTH Assembly Source Code.* Includes CP/M®, IBM-PC®, and APPLE® listing for kernel $20
- ☐ **Volume 3,** *Floating Point Glossary* by Springer $10
- ☐ **Volume 4,** *Expert System* with source code by Park $15
- ☐ **Volume 5,** *File Management System* with interrupt security by Moreton $25
- NEW ☐ **Volume 6,** *Expert Tutorial for Volume 4* by M & L Derick $15

MVP-FORTH Software – A Transportable FORTH

- NEW ☐ **MVP-FORTH Programmer's Kit** including disk, documentation, Volumes 1 & 2 of MVP-FORTH Series (*All About FORTH,* 2nd Ed. & Assembly Source Code), and *Starting FORTH.* ☐ CP/M, ☐ CP/M 86, ☐ APPLE, ☐ STM PC, ☐ IBM PC/XT/AT, ☐ PC/MS-DOS, ☐ Osborne, ☐ Kaypro, ☐ H89/Z89, ☐ Z100, ☐ TI-PC, ☐ MicroDecisions, ☐ Northstar, ☐ Compupro, ☐ Cromenco, ☐ DEC Rainbow, NEW ☐ NEC 8201, ☐ TRS-80/100, ☐ HP 110, ☐ HP 150 $150
- ☐ **MVP-FORTH PADS (Professional Application Development System)** for IBM PC/XT/AT or PCjr or Apple II, II+ or IIe. An integrated system for customizing your FORTH programs and applications. The editor includes a bi-directional string search and is a word processor specially designed for fast development. PADS has almost triple the compile speed of most FORTH's and provides fast debugging techniques. Minimum size target systems are easy with or without heads. Virtual overlays can be compiled in object code. PADS is a true professional development system. Specify Computer. $500
- NEW ☐ **MVP-FORTH EXPERT-2 System** for learning and developing knowledge based programs. Both IF-THEN procedures and analytical subroutines are available. Source code is provided. Specify ☐ Apple, ☐ IBM, or ☐ CP/M. Includes MVP-FORTH Series, Volumes 4 and 6, *Expert Systems* by Park. $100
- NEW ☐ **FORTH-Writer,** A Word Processor for the IBM PC/XT/AT with 256K. MVP-FORTH compatible kernal with Files, Edit and Print systems. Includes Disk and Calculator systems and ability to compile additional FORTH words. $150
- NEW ☐ **MVP-FORTH Enhancement Package** for IBM-PC/XT/AT Programmer's Kit. Includes full screen editor, MS-DOS file interface, disk, display and assembler operators. $110
- ☐ **MVP-FORTH Cross Compiler** for CP/M Programmer's Kit. Generates headerless code for ROM or target CPU $300
- ☐ **MVP-FORTH Meta Compiler** for CP/M Programmer's kit. Use for applicatons on CP/M based computer. Includes public domain source $150
- ☐ **MVP-FORTH Fast Floating Point** Includes 9511 math chip on board with disks, documentation and enhanced virtual MVP-FORTH for Apple II, II+, and IIe. $450
- ☐ **MVP-FORTH Programming Aids** for CP/M, IBM or APPLE Programmer's Kit. Extremely useful tool for decompiling, callfinding, translating, and debugging. $200
- ☐ **MVP-FORTH Floating Point & Matrix Math** for IBM PC/XT/AT with 8087 or Apple with Applesoft on Programmer's Kit or PADS $85
- ☐ **MVP-FORTH Graphics Extension** for IBM PC/XT/AT or Apple on Programmer's Kit or PADS $65
- ☐ **MVP-FORTH MS-DOS** file interface for IBM PC PADS $80

FORTH DISKS

FORTH with editor, assembler, and manual.

- ☐ **APPLE** by MM, 83 $100
- ☐ **ATARI®** valFORTH $60
- ☐ **CP/M** by MM, 83 $100
- ☐ **HP-85** by Lange $90
- ☐ **HP-75** by Cassady $150
- ☐ **IBM-PC** by LM, 83 $100
- ☐ **Z80** by LM, 83 $100
- ☐ **8086/88** by LM, 83 $100
- ☐ **68000** by LM, 83 $250
- ☐ **VIC FORTH** by HES, VIC20 cartridge NEW $20
- ☐ **C64** by HES Commodore 64 cartridge $40
- ☐ **Timex** by HW
  - ☐ T/S 1000/ZX-81 $25
  - ☐ 2068 NEW $30

Enhanced FORTH with: F-Floating Point, G-Graphics, T-Tutorial, S-Stand Alone, M-Math Chip Support, MT-Multi-Tasking, X-Other Extras, 79-FORTH-79, 83-FORTH-83.

- ☐ **APPLE** by MM, F, G, & 83 $180
- ☐ **ATARI** by PNS, F,G, & X. $90
- ☐ **CP/M** by MM, F & 83 $140
- ☐ **TRS-80/I or III** by MMS F, X, & 79 $130
- ☐ **Timex** by FD, G,X, & 79 $45
- ☐ **C64** by ParSec. MVP, F, G & X $96
- ☐ **Extensions** for LM Specify IBM, Z80, or 8086
  - ☐ Software Floating Point $100
  - ☐ 8087 Support (IBM-PC or 8086) $100
  - ☐ 9511 Support (Z80 or 8086) $100
  - ☐ Color Graphics (IBM-PC) $100
  - ☐ Data Base Management $200

Key to vendors:
FD Forth Dimension
HW Hawg Wild Software
LM Laboratory Microsystems
MM MicroMotion
MMS Miller Microcomputer Services
PNS Pink Noise Studio

FORTH MANUALS, GUIDES & DOCUMENTS

- NEW ☐ **Thinking FORTH** by Leo Brodie, author of best selling "Starting FORTH" $16
- ☐ **ALL ABOUT FORTH** by Haydon. See above. $25
- ☐ **FORTH Encyclopedia** by Derick & Baker $25
- NEW ☐ **FYS FORTH User's Manual** with Source Code from the Netherlands $25
- ☐ **The Complete FORTH** by Winfield $16
- ☐ **Understanding FORTH** by Reymann $3
- ☐ **FORTH Fundamentals,** Vol. I by McCabe $16
- ☐ **FORTH Fundamentals,** Vol. II by McCabe $13
- NEW ☐ **Mastering FORTH** by Anderson & Tracy $18
- ☐ **Beginning FORTH** by Chirlian $17
- ☐ **FORTH Encyclopedia Pocket Guide** $7
- ☐ **And So FORTH** by Huang. A college level text. $25
- ☐ **FORTH Programming** by Scanlon $17
- ☐ **Starting FORTH** by Brodie. Best instructional manual available. (soft cover) $19
- ☐ **68000** fig-Forth with assembler $25
- ☐ **FORML Proceedings**
  - ☐ 1980 ☐ 1981 Vol 1
  - ☐ 1981 Vol 2 NEW
  - ☐ 1982 ☐ 1983 each $25
- ☐ **1981 Rochester Proceedings**
  - ☐ 1981 ☐ 1982 ☐ 1983
  - ☐ 1984 NEW each $25
- ☐ **Bibliography of FORTH** $17
- ☐ **The Journal of FORTH Application & Research**
  - ☐ Vol. 1/1 ☐ Vol. 1/2
  - ☐ Vol. 2/1 NEW each $17
- ☐ **METAFORTH** by Cassady $30
- ☐ **Threaded Interpretive Languages** $23
- ☐ **Systems Guide to fig-FORTH** by Ting $25
- ☐ **Inside F83** Manual by Ting NEW $30
- ☐ **FORTH Notebook** by Ting NEW $25
- ☐ **Invitation to FORTH** $20
- ☐ **PDP-11 User Man.** $20
- ☐ **FORTH-83 Standard** $15
- ☐ **FORTH-79 Standard** $15
- ☐ **FORTH-79 Standard Conversion** $10
- ☐ **Installation Manual for fig-FORTH** $15
- ☐ **Source Listings of fig-FORTH,** Specify CPU $15

Ordering Information: Check, Money Order (payable to MOUNTAIN VIEW PRESS, INC.), VISA, MasterCard, American Express. COD's $5 extra. Minimum order $15. No billing or unpaid PO's. California residents add sales tax. Shipping costs in US included in price. Foreign orders, pay in US funds on US bank, include for handling and shipping by Air: $5 for each item under $25, $10 for each item between $25 and $99 and $20 for each item over $100. All prices and products subject to change or withdrawal without notice. Single system and/or single user license agreement required on some products.

MOUNTAIN VIEW PRESS, INC.

PO BOX 4656 **MOUNTAIN VIEW, CA 94040** **(415) 961-4103**

omy is not a factor) are included in the estimates, the range expands to include 2 and 3 cycles per degree, the remaining area of peak sensitivity. Type size and spacing are not arbitrary; they have been carefully tuned to the mechanisms of the visual system by centuries, even millennia, of careful experimentation. Screen fonts should also be tuned to this band of fundamental frequencies.

A failing common to many screen fonts is spacing between letters that is too tight in some combinations, too loose in others, and generally irregular. Irregular spacing between letters is faddish in advertising typography, where it serves to attract attention to sales pitches that the reader would otherwise ignore, but analysis of several centuries of typographic texts demonstrates that open, rhythmic spacing is the most readable.

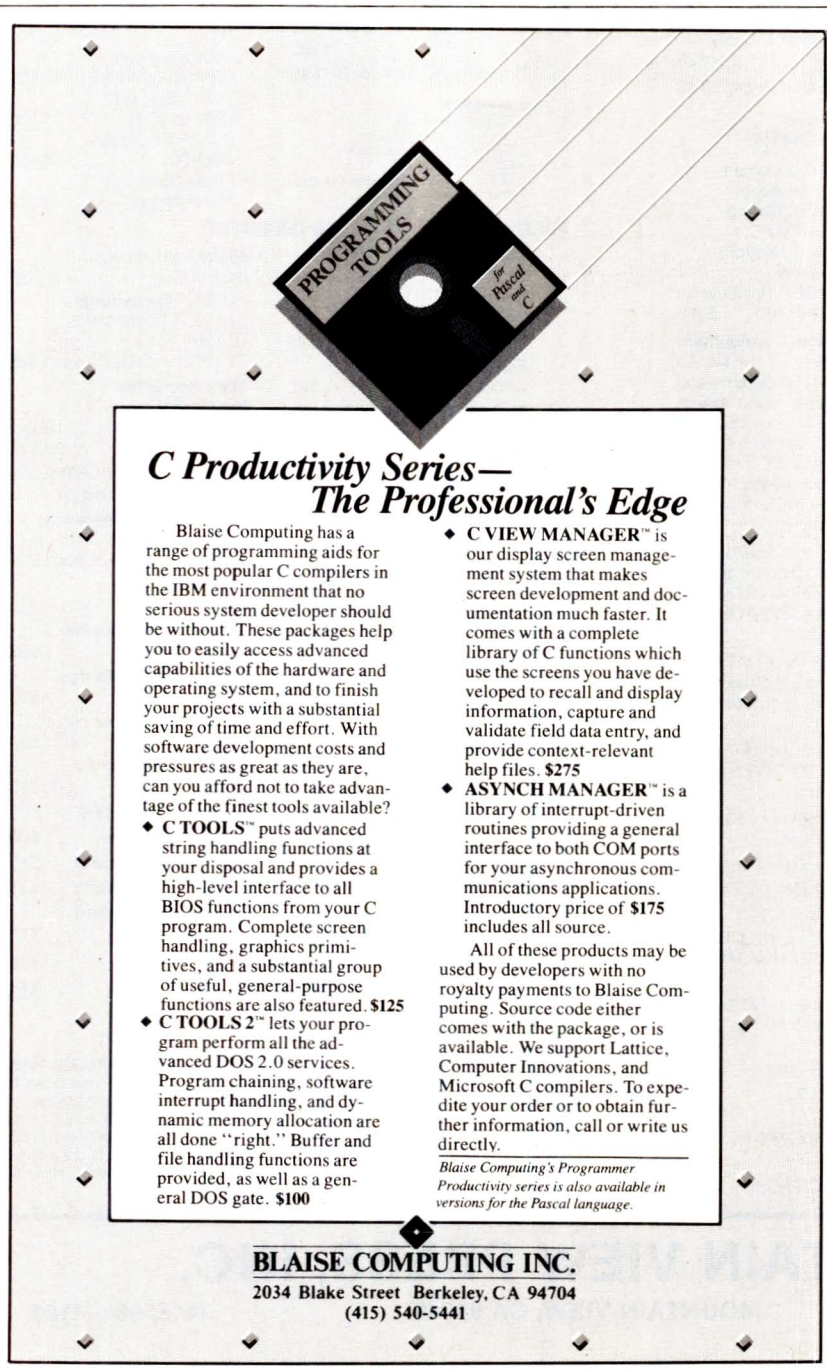

PROPORTION

Because the alphabet is a system, the proportions of the letters must be tuned to each other and to the overall proportions of the alphabet design. The widths of the letters must conform to three main criteria: the x-height of the alphabet design, the optimum spatial frequency of the text, and the historically evolved letter shapes.

The average width of the letters in relation to the size of the font determines the fundamental spatial frequency of the font at a particular reading distance. This frequency should be within a certain range, as discussed earlier. Moreover, the different widths of the letters in relation to each other help the reader discriminate their forms and permit a rhythmic spacing pattern.

Proportionally spaced fonts are more legible than monospaced fonts because of the more finely tuned pattern of the text. When monospaced fonts are necessary, a font designer should compensate for the irregular rhythm and distorted proportions, but such compensation is possible only up to a point. The limitations of mechanical typewriter technology created a need for monospaced fonts, but these limitations are not necessary in digital typography. The less legible monospaced fonts can now be retired from most applications.

DIFFERENTIATION

Serifs act as flags on character shapes to aid in differentiation. Note that in a sans serif (i.e., without serifs) font, an r followed by n is easy to confuse with an m whereas the same combination in a serifed font is less easy to confuse with m. Similar demonstrations are possible for other letter combinations. Therefore, while sans serif fonts might seem more modern,

(continued)

Inquiry 41


LURKING BEHIND EVERY COMPUTER IS THE POWER TO DESTROY ITSELF.
That power cord may look innocent. But it could suddenly turn against your PC.
It could, for example, hurl a power spike from static or lightning into its delicate circuitry. Wiping out its memory. Or destroying a defenseless component.
Don't risk it. Get a 6-outlet Wire Tree Plus™ surge protector from NETWORX.™ It guards against spikes. Filters out RF interference. And it's the *only* device with two phone jacks to protect modems against surges.
Other unique features include separate switches for the CPU and peripherals and a bracket that mounts under the front of the workstation.
The illuminated switches are easy to reach, and yet recessed, so you can't accidentally shut down power and lose data.
If you don't need 6 outlets, pick up our 4-outlet Wire Tree.™ Or our single-outlet Wire Cube™ that's ideal for portable computers.
That'll take care of power surges. But what if your foot gets tangled in a power cord? Prevent this potential disaster with the Wire Away.™ It stores up to four 18-gauge wires and ends the hazardous mess of dangling cords.
All our products are backed by a 5-year warranty. So when you shop for a PC, ask for NETWORX computer station accessories. And don't go home without them.
NETWORX
The Wire Tree Plus
NETWORX™
Computer Station Accessories
Networx, Brooklyn, NY 11237-1587 (718) 821-7555
Inquiry 256

PICK ONE.

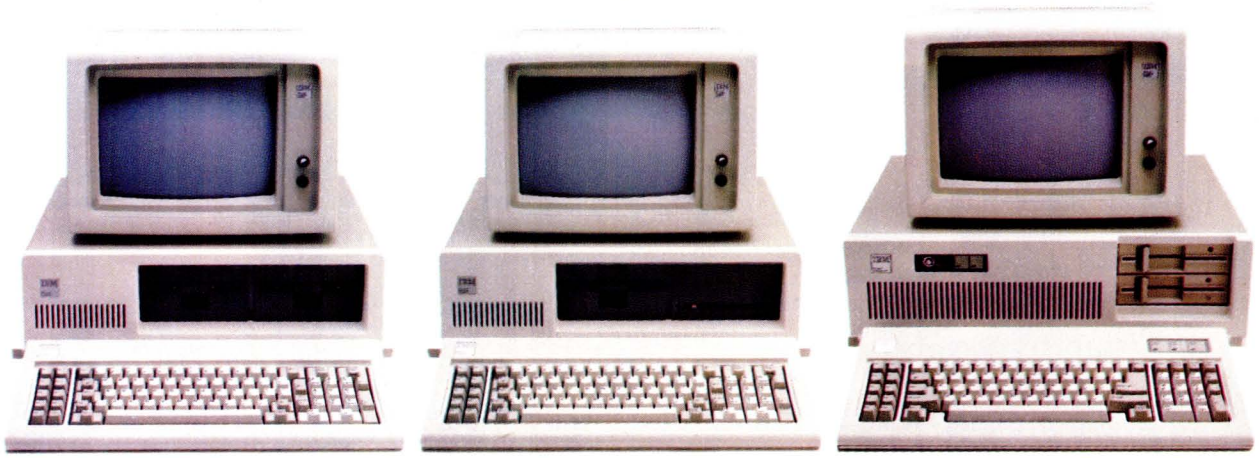

COMPAQ® is a registered trademark and COMPAQ DESKPRO™ is a trademark of COMPAQ Computer Corporation. IBM® is a registered trademark of International Business Machines Corporation UNIX™ is a trademark of AT&T Bell Labs. ©1984 COMPAQ Computer Corporation. All rights reserved.

OR HAVE IT ALL.



Now you don't have to compromise to have it all in a personal computer.

Pick the new COMPAQ DESKPRO™ over the IBM® PC or *XT* and you get a lot more computer for your investment.

One that runs thousands of the most popular programs right off the shelf—at speeds two to three times faster. One with a dual-mode monitor (amber or green) to display text *and* graphics. One with exclusives like internal tape backup and shock-mounted storage system.

Pick the COMPAQ DESKPRO over the IBM AT and you get comparable performance without sacrificing *any* PC or *XT* compatibility... *but* for a lot less investment.

And, of course, you can start having it all with your COMPAQ DESKPRO today. It's available now.

In short, COMPAQ DESKPRO is the only personal computer that can grow from a PC to *XT* to AT level of functionality—easily, affordably, compatibly.

Configure it the way you want: With one or two diskette drives. One or two fixed disk drives. Or new options like a 30M-byte high-performance fixed disk, high-speed 8087-2 co-processor and internal tape backup for either the 10M-byte or 30M-byte fixed disk.

UNIX™-based operating systems? We run them today. PC DOS Version 3.0? That, too. Networking? Can do. Multi-users? No problem. Multi-tasking? Easy. Tape backup? It's inside. High-resolution text and graphics? Standard. Two speeds? Exclusive.

When you pick the COMPAQ DESKPRO, you *do* have it all—from the company that makes the best-selling portable business computer in the world. For a free brochure and the location of your nearest Authorized COMPAQ Dealer call 1-800-231-0900, Operator 2 or Telex 795437 COMPAQCOMP HOU. In Canada, call 416-449-8741.

It simply works better.

COMPAQ DESKPRO™

Every option you'll ever need.

You're looking at ULTRAFRAME™ a powerful 8/16 bit multiprocessor you can configure to handle any application.

It's the one system that can tackle your toughest jobs today with the capacity to grow up to 32 users or tasks — within the same chassis.

Get 5" & 8" Winchester drives from 10-120MB (formatted). Also, 14" models from 145MB to 1,160MB. And backup systems appropriate to any system you design.

Now run both MS-DOS and CP/M software.

Our system lets you network IBM PC's, compatibles or other popular PC's into a serious multiuser business system. Tie PC's into the speed of an S-100 buss with inexpensive boards and a coaxial cable.

Each PC can tap network resources including hard disks (10-300MB) and system printers with spooling.

The PC's gain the proven network management capablilties of TurboDOS™. Run MS-DOS™ and CP/M 86 software plus true multiuser accounting and data base applications.

FRONT



BACK



The industry's longest warranty.

We've built the ULTRAFRAME to last — and backed it with a full three year warranty. Plus, we give a level of old-fashioned factory support you won't get from anyone else. And on-site maintenance is available nation-wide through 45 service centers.

ULTRAFRAME™

ibs

INDEPENDENT BUSINESS SYSTEMS
Call collect (415) 443-3131 TWX: 910-386-6003 IBSNET
5915 Graham Court, Livermore, CA 94550

The multiuser system that also networks IBM PC's.

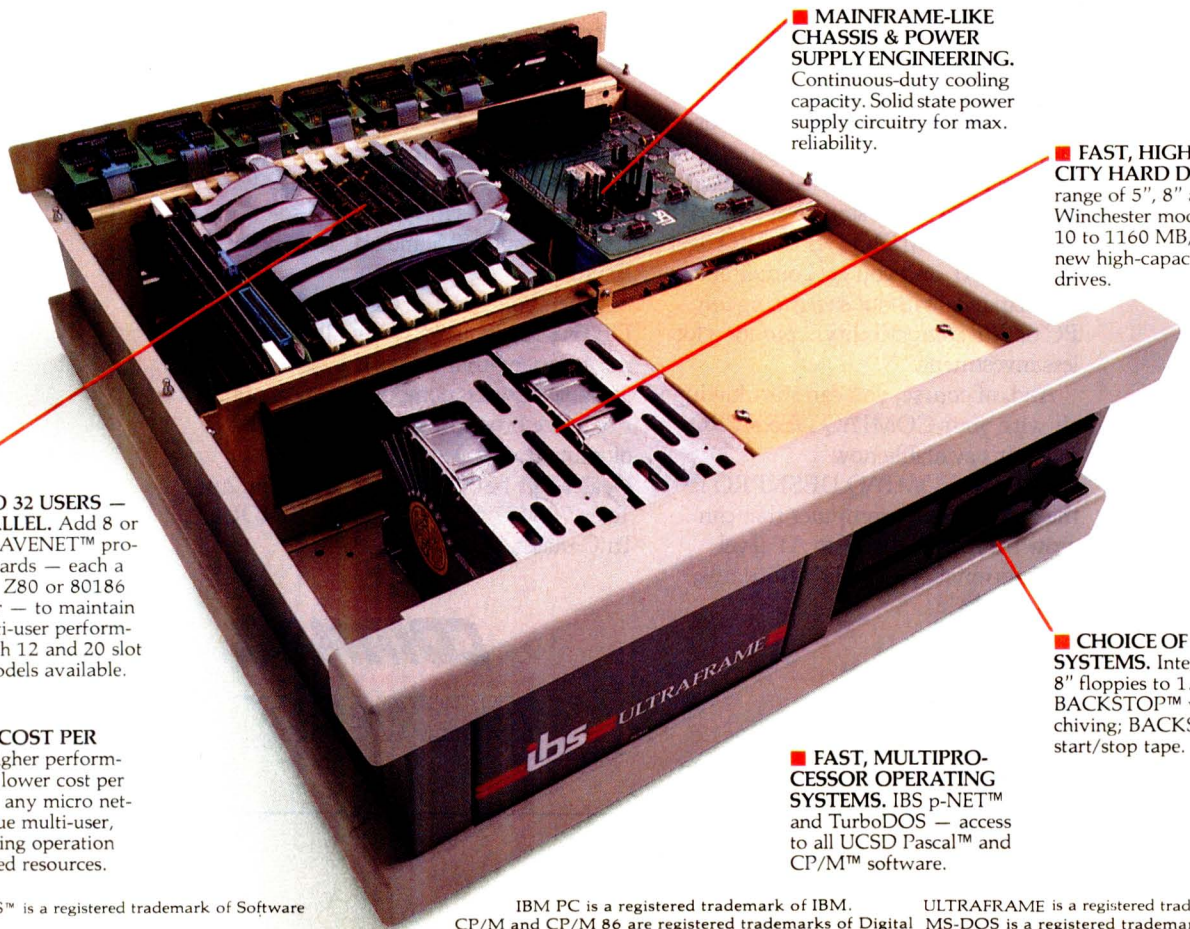

■ **MAINFRAME-LIKE CHASSIS & POWER SUPPLY ENGINEERING.** Continuous-duty cooling capacity. Solid state power supply circuitry for max. reliability.

■ **FAST, HIGH CAPACITY HARD DISKS.** Full range of 5", 8" and 14" Winchester models from 10 to 1160 MB, including new high-capacity 5" drives.

■ **UP TO 32 USERS — IN PARALLEL.** Add 8 or 16 bit SLAVENET™ processor boards — each a complete Z80 or 80186 computer — to maintain fast, multi-user performance. Both 12 and 20 slot S-100 models available.

■ **LOW COST PER USER.** Higher performance and lower cost per user than any micro network. True multi-user, multitasking operation plus shared resources.

■ **CHOICE OF BACKUP SYSTEMS.** Integral 5" or 8" floppies to 1.2 MB. BACKSTOP™ video archiving; BACKSTOP II™ start/stop tape.

■ **FAST, MULTIPROCESSOR OPERATING SYSTEMS.** IBS p-NET™ and TurboDOS — access to all UCSD Pascal™ and CP/M™ software.

TurboDOS™ is a registered trademark of Software 2000.

IBM PC is a registered trademark of IBM. CP/M and CP/M 86 are registered trademarks of Digital Research.

ULTRAFRAME is a registered trademark of IBS, Inc. MS-DOS is a registered trademark of Digital Resea

they are less legible because they lack these significant distinguishing elements.

The construction of Latin-based alphabetic characters also aids in differentiation. These characters are like molecules constructed from simpler atoms. The primitive atomic elements are called strokes because they were originally a single motion of a pen or brush. The various kinds of strokes include verticals, horizontals, curves, and diagonals. The alphabet can be subdivided into groups of letters made up of particular primitive elements.

For example, in the lowercase, the letters n, m, h, r form one group based on the vertical straight stem and arch; o, c, e form a group based on the curved bowl; b, d, p, q form a related group based on the curve plus straight; and v, w, x, y form a group based on the diagonal. These groups help the reader to distinguish the letterforms.

Faced with the problem of screen jaggies, which are worst on curved and diagonal strokes, some font designers have reduced the letter shapes to straight vertical and horizontal elements. While this technique reduces the effect of the jaggies, it also destroys the legibility of the font by eliminating two of the four primitive elements and collapsing the form groups together.

When every letter in the alphabet resembles every other letter, the basic principle of discrimination is lost. While the jaggies are a problem, it is preferable to maintain the traditional shape primitives and keep the letterforms unambiguous, even if the diagonals and curves show jaggies.

Gray Scaling

Low-resolution screen fonts are another problem for the designer. One technical response to this problem is to increase the display information from one bit per pixel (the black and white bit-mapped display of current workstations) to several bits per pixel (the gray-scaled display of some experimental and color workstations).

(continued)



The Quick Silver Fox™ Jumps Over The Big Blue Dog.

We really hate to pick on the big guys but compared to the Silver Fox your basic IBM-PC™ is an overpriced dog.

256k RAM

Why? Well, for starters, your basic Silver Fox comes with 256k of RAM which acts like a disk drive so that more of your software is accessed at the speed of light rather than the speed of a mechanical drive head.

1.6 Megabytes

You also have more than twice as much software to access because the Silver Fox comes with dual 800k disk drives for a total of 1.6 Megabytes. Yet the Silver Fox can read and write to all popular PC formats.

Free Silverware

1. MS-DOS
2. HAGEN-DOS™
3. M-DISK
4. WordStar™
5. EasyWriter
6. DataStar
7. ReportStar
8. FILEBASE
9. CalcStar
10. Color Graphics Basic
11. MailMerge
12. SpellStar
13. 25 Games, graphics and utilities

The best free software bundle in the business, and the Fox will run some programs written for the IBM-PC like dBase II and Multiplan, and programs written for Sanyo's new MBC-550 series.

Reliability

Because the Silver Fox is born on a totally automated production line in Japan it is inherently more reliable than systems built by hand. The Fox is burned and tested for 14 days in Japan, and further tested after final assembly here in the good old U.S.ofA.

One Year Warranty

The Silver Fox is built better so we can back it with a limited, one-year warranty, four times longer than IBM. We're Scottsdale Systems and since 1980 we've shipped over $10,000,000 of microcomputer equipment directly to microcomputer users.

Because we deal directly with users, we think we have a better idea of what you want. So the Silver Fox includes graphics with twice IBM's resolution, a printer port, a keyboard with a big return key, and a 12", high-resolution monitor as standard equipment.

Of course, you could spend $4729 at Computerland for an IBM-PC that will perform almost as well as a Silver Fox. But why bother when you can call

1 (602) 941-5856

and get your

$1398

to perform like $4729?

For additional information call 1 (602) 941-5856, or write Scottsdale Systems, 617 N. Scottsdale Road #B, Scottsdale, AZ 85257.

IBM PC price is based on a phone quote from the Mesa, Az Computerland on July 30, 1984. Price included 256k RAM, dual 360K drives (800K s weren t available), software, and a graphics monitor.

Trademarks: Silver Fox and Hagen DOS, Scottsdale Systems Ltd. IBM PC, International Business Machines Corporation. Wordstar, Calcstar, Mailmerge, Spellstar, and Infostar, Micropro International. MS-DOS, Multiplan, Microsoft Corporation. Filebase, EWDP Software, Inc. dBASE II, Ashton-Tate.

Ordering: Telemarketing only, all prices are for cash, F.O.B. Scottsdale, price subject to change, product subject to limited supply. Visa, Mastercard add 3%. AZ residents add 6%. Returned merchandise subject to a 20% restocking fee. Personal company checks take up to 3 weeks to clear. No C.O.D.'s or A.P.O.'s.

Because they contain more information, gray-scaled fonts can better depict traditional letterforms, at least when viewed in isolated words and phrases. Also, the low-contrast edges of curves and diagonals reduce the visual effect of the jaggies. The letterforms appear smoother.

Some researchers have hypothesized that gray-scaled text would be more readable than bit-mapped text. Other evidence suggests that the eye relies upon high-contrast edges to focus the text image during reading. The soft, low-contrast edges of gray-scaled fonts might actually reduce legibility by preventing the focusing mechanism from finding a sharp edge. It is not yet certain whether the conservative eyes of readers will accept gray-scaled text, nor whether it is physiologically more difficult to read despite its less jagged appearance.

Gray-scaled fonts are also more expensive to display and more difficult to design. They require more bits of memory to store the gray value at each pixel, and more elaborate and stable display electronics. The shapes of gray-scaled letters are more dependent on precise control of brightness and contrast on the display.

Screen and Printer

The foregoing principles have concentrated on designing screen fonts for optimum readability (for more information, see "Digital Typography" by Charles Bigelow and Donald Bay, *Scientific American*, August 1983). However, text is also read as printer output on paper. The relation between screen text and printer text is the subject of intensive research, with many recent efforts attempting to integrate screen and printer in what are called "what you see is what you get" (WYSIWYG) editing and layout systems.

The WYSIWYG principle is that the screen should show exactly how the printed document will look. WYSIWYG text editors and document formatters usually attempt to show different typeface styles in different sizes, spacings, and page organizations.

The usual model for WYSIWYG systems is traditional typography, which offers so vast and complex a range of possibilities that present WYSIWYG systems can offer only a reduced subset. This is true because 72-line-per-inch screens have only one-fourth the resolution of 300-line-per-inch printers, and one-tenth the resolution of 720-line-per-inch typesetters.

Usual WYSIWYG implementations fall into one of two categories: bottom-up or top-down. Bottom-up

(continued)

New 64K SBC

Requires no terminal. Includes Video Controller and CP/M® 2.2 — Only



$375.

Single board computer runs with any size floppy drive.

Hardware
- 6 MHz CPU
- Graphics/Alpha Video Controller
- 2 Serial Ports
- 4 Parallel Ports
- I/O Expansion
- 64K RAM

Software
- Alpha Terminal Driver
- Floppy Disk Driver
- Source Code Provided
- CP/M® 2.2

CP / M is a registered trademark of Digital Research

Call our Toronto Office today: (416) 745-7214 Megatel
For information write: 1051 Clinton St., Buffalo, N.Y. 14206

Substantial OEM Discounts Available

Other SBC models available include hard disk controller and more RAM

Subscription Problems?



We want to help!

If you have a problem with your BYTE subscription, write us with the details. We'll do our best to set it right. But we ***must*** *have the name, address, and* ***zip*** *of the subscription (new and old address, if it's a change of address). If the problem involves a payment, be sure to include copies of the credit card statement, or front and back of cancelled checks. Include a "business hours" phone number if possible.*

BYTE
Subscriber Service
P.O. Box 328
Hancock, NH 03458

Inquiry 405

The only Modula-2 native code compiler for 8086/8088-based machines and VAX® systems.

All the strengths of Pascal, plus improvements in every respect.

Modula-2 is Niklaus Wirth's second generation programming solution. All the best features of his Pascal language plus major features for true modularity, support for multi-tasking, type checking between program modules, syntax improvements, and features for increased portability (to name just a few).

A complete program development system.

LOGITECH MODULA-2 includes a complete implementation of Wirth's design, plus 8086 large model support and additional LOGITECH modules (including display handling and dynamic string handling).

A complement of powerful debugging tools—including compile-time error checks and symbolic debugging—is included.

Professional support from the people who wrote LOGITECH MODULA-2.

LOGITECH's Modula-2 is a professional development tool, backed by the most professional support available for Modula users.

LOGITECH's complete Modula family:

- MODULA-2/86™ native code 8086/8088 compiler
- MODULA-2/VMS™ VAX-resident compiler
- MODULA-2/VX86™ VAX to 8086/8088 cross compiler

Don't start another project without considering LOGITECH MODULA-2.

Trademarks: MODULA-2/86, MODULA-2/VX86, MODULA-2/VMS—LOGITECH, Inc.
Registered Trademarks: VAX—Digital Equipment Corporation

Inquiry 208



To order, or for more information, call or write:

Chris Cale, 805 Veterans Blvd.
Redwood City, CA 94063
(415) 365-9852

In Europe contact: Willy Steiger,
LOGITECH SA, Switzerland.
(021) 77 45 45

LOGITECH

Inquiry 214

magnum p.c.

800-544-4354

VISA GA Residents (404) 441-3112 MasterCard

4056 WETHERBURN WAY, SUITE 205, ATLANTA, GA 30092

COMPUTERS

IBM PC YOU CONFIGURE.....CALL
SANYO MBC & SUPER.....NEW LOW PRICES

BOARDS

AST SIX PAC PLUS & MONOGRAPH.....CALL
EVEREX GRAPHICS EDGE.....399
HERCULES GRAPHICS CARD.....335
IRMA 3278 EMULATOR.....BEST PRICE
MICROTEK NEW PRODUCTS.....CALL
ORANGE MICRO ALL BOARDS.....CALL
ORCHID PC BLOSSOM & TURBO.....CALL
PERSYST BOARDS & CARDS.....SAVE
QUADRAM ALL PRODUCTS.....CALL
STB GRAPHIX PLUS II.....CALL
TECMAR ALL PRODUCTS.....CALL
TITAN ACCELERATORS FOR IBM OR APPLE..CALL
TSENG LABS ULTRA PAK.....NEW

DISK DRIVES

FULL HEIGHTS (FOR IBM).....FROM 110
HALF HEIGHTS (FOR IBM).....FROM 125
ALPHA OMEGA TURBO 10 (FASTER THAN XT)800
EVEREX 10 MEG INTERNAL HARD DISK.....850
1/2 HT 1/4" TAPE STREAMER.....1069
IOMEGA BERNOULLI BOX (20 MEG).....2895
MICRO SCI (FOR APPLE).....CALL
PCjr 2ND DISK DRIVE OR HARD DISK.....CALL
PEACHTREE PERIPHERALS.....CALL
QUADDISK 6 MEG REMOVABLE.....1725
QUENTIN (FOR APPLE & IBM).....SAVE
SUPER 5 (FOR APPLE).....179
TALLGRASS HARD DISK WITH BACKUP.....CALL
TANDON TM100-2.....199

PRINTERS

C. ITOH LETTER QUALITY.....CALL
EPSON FX, RX.....SAVE
FUJITSU.....CALL
NEC SPINWRITER, P2 & P3.....CALL
OKIDATA ALL MODELS.....BEST PRICES
PANASONIC.....CALL
QUME.....SAVE
STAR MICRONICS GEMINI 10X/15X.....269/379
TOSHIBA P1350 & P1340.....CALL

MONITORS

AMDEK.....CALL
PRINCETON GRAPHICS.....SAVE
QUADRAM QUADCHROME.....CALL
SUPER 5.....CALL
TAXAN ALL MODELS.....CALL

SOFTWARE

COPY II PC.....SAVE
D-BASE III.....399
FRAMEWORK.....399
JANUS/ADA.....SAVE
LOTUS 1-2-3.....SAVE
MULTIMATE.....279
SYMPHONY.....475
10 BASE.....CALL

MODEMS

HAYES SMART MODEM 300/1200.....212/499
NOVATION SMART CAT PLUS W/MITE.....399
VEN-TEL HALF CARD 1200 BAUD.....425
PENRIL.....SAVE
MAXWELL.....NEW

ACCESSORIES

BUFFERS/SPOOLERS.....CALL
CHIPS 64K - SET OF 9.....40
COMPUSERVE STARTER KIT.....32
2 & 4 WAY SWITCH BOXES PAR. & SERIAL..SAVE

DISKETTES

	CASE 100	BOX 10
BASF 5¼ SS/DD	145	17
5¼ DS/DD	170	20

AVAILABILITY AND PRICES SUBJECT TO CHANGE

APPROVED CORPORATE ACCOUNTS WELCOMED

WYSIWYG systems start with screen resolution and force the printer to conform to the limitations of the screen. In the simplest case, each screen pixel is mapped one-to-one onto the paper output by the printer.

While this provides a certain Cartesian satisfaction, since it can be logically demonstrated that the printer page is exactly like the screen display, the two images will actually appear very different. As I discussed earlier, the screen characters are eroded by the characteristics of the display technology. However, the printed characters are either emboldened, as by ribbon-spread on a dot-matrix printer or by toner effects on a black-writing laser printer, or not eroded to the same degree as the screen fonts, as by a white-writing laser printer.

Thus, if a font is tuned to the optimum weight and contrast on the screen, it will appear too dark and too low in contrast on the printout. Conversely, if the fonts are tuned to the printer, they will appear too light and too high in contrast on the screen. This is unavoidable. What you see is not what you will get at the present level of display and printer technology.

A second problem with bottom-up WYSIWYG is exaggeration of jaggies on the printout. Aliasing on the screen is somewhat ameliorated by the soft intensity contour of the CRT writing spot. The spot does not have sharp edges, nor is it square or rectangular; instead it is blurry and round. The low-contrast edges of the pixels tend to soften the apparent jaggies. Printers, however, produce a high-contrast spot that clearly renders the edges of the jaggies. The jaggies become even more apparent to the reader, since the human visual system tends to enhance edges.

On a laser printer that has several times the screen's resolution, several printer pixels render a single screen pixel. This emphasizes the rectangularity of the raster and further enhances the jagginess of the digital artifacts. Printer fonts that simulate screen resolutions look noticeably inferior to printer fonts that are optimized to the full resolution and imaging characteristics of the printer.

Top-down WYSIWYG systems store fonts as high-resolution master images. These are usually outlines that can be scan-converted to raster images to represent arbitrary sizes at arbitrary resolutions on screens, printers, or typesetters. This device-independent method is intellectually appealing, since the same design produces all characters at the writing resolution of each target device.

However, low-resolution and high-resolution fonts will not be truly the same. In top-down systems, the fonts on low-resolution devices become the inferior ones, both in comparison to high-resolution versions and to optimized low-resolution designs. The current generation of master-image data structures and associated scan-conversion algorithms can do good automatic rasterization at bit-mapped resolutions of around 1200 lines per inch, and an acceptable job at 600 lines per inch, but only a mediocre to inadequate job at 300 lines per inch, an incompetent job at 150 lines per inch, and a hopelessly botched hash at 75 lines per inch.

Conclusion

The personal workstation offers powerful tools to the worker, but these tools are dependent upon typography: legible fonts in effective arrangements. Unfortunately, traditional typefaces cannot be successfully reproduced at current display screen and printer resolutions. To optimize legibility, new fonts must be designed for the digital media.

These fonts will be most effective if they take into account the nature of the human visual system, the logical and historical principles that shaped present-day alphabets, the characteristics of current digital imaging devices, and the conceptual structures underlying typographic variations and arrangements. The new technology requires a new typography that preserves the fundamental features of literacy but expresses them with new clarity in a new medium. ■

The PC Plotter: It will change the way business looks at graphics.

The lowest-priced professional plotter on the market today is Houston Instrument's new four-pen PC Plotter. It is designed to produce the crisp graphics you need to compete — and communicate — in business. Just what makes this plotter so competitive? Let's take a look:

Price — A multi-pen, compact, single-sheet plotter at $595* isn't just a low price — it's an unbelievably low price. What an affordable way to link the power of graphics communication to your personal computer.

Performance — Yours and Ours — Until the PC Plotter was born, it was too expensive to let the pictures do the talking. Now that's no longer true. So, the next time the boss walks into the office needing some "nice charts and graphs," you can quickly fill the request with clean, colorful, wonderful graphics. Who knows, you might even get a raise!

As to our performance, we're the only plotter manufacturer offering you hundreds of graphics software packages which are compatible with the PC Plotter. That means you can produce any type of drawing you require.

Flexibility — Depending on your needs, you can select from two PC Plotter models. One (PC Plotter Model 595 for $595.00*) allows you to produce graphics or overhead transparencies on 8½" × 11" paper or film; the other (PC Plotter Model 695 for $695.00*) permits either 8½" × 11" or 11" × 17" graphics. And we didn't forget the OEM. Houston Instrument will work with you to configure a plotter that's perfect for your particular application.

For the name of your closest PC Plotter distributor or dealer, contact Houston Instrument, P.O. Box 15720, Austin, Texas, 78761 or call (512)835-0900. Outside Texas call 800-531-5205. In Europe, contact Houston Instrument, Belgium NV., Rochesterlaan 6, 8240 Gistel, Belgium. Tel. 059-27-74-45, Tlx. 846-81399.

Inquiry 164



houston instrument

houston instrument 25th Anniversary 1959-1984

4PO16

*U.S. suggested list price.

As your introduction to **The Library of**

Computer and Information Sciences

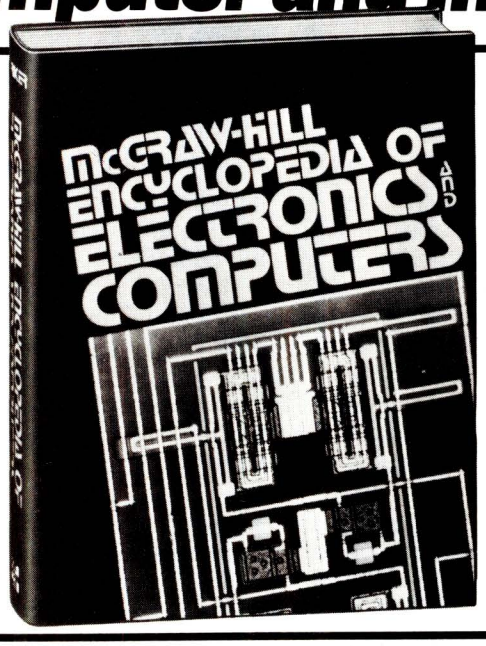

Take this McGraw-Hill ENCYCLOPEDIA OF ELECTRONICS AND COMPUTERS. (61613-3) for only $3.00.

Sybil P. Parker, Ed-in-Chief. 477 articles by 272 contributors. 964 double-columned pages. Outsized, 8¾" x 11¼". 1266 illustrations, tables, and graphs. 5500-entry index. *Counts as 3 choices.* $63.50

or 3 other books for only $1.00 each (values to $86.90).

You simply agree to buy 3 more books—at handsome discounts—within the next 12 months.

(Publishers' Prices shown.)



54455. IMS PROGRAMMING TECHNIQUES: A Guide to Using DL/1. *Kapp and Leben.* Specific techniques for writing application programs in ANS COBOL, PL/1, or Assembler Language. $17.95



35529. THE BASIC HANDBOOK. Second Edition. *David A. Lien. The* reference-encyclopedia of the BASIC language. Softbound. $19.95



62638. MICROPROCESSOR SYSTEMS. *M. Aumiaux.* How to make reliable evaluations, define overall structure, evaluate characteristics, and more. $26.00



70723. THE PROGRAMMER'S CP/M HANDBOOK. *Andy Johnson-Laird.* A technically-oriented guide for the small computer user. $27.95



70206. PRINCIPLES OF DATABASE SYSTEMS. Second Edition. *Jeffrey D. Ullman.* A reference which spells out every feature of the modern database technology. $24.95



34150. APPLIED CONCEPTS IN MICROCOMPUTER GRAPHICS. *Bruce A. Artwick.* Features references to both the IBM PC and the Apple II. With over 150 illustrations, 14 in full color. $27.95



68170. THE PERSONAL COMPUTER BASIC(S) REFERENCE MANUAL. *Donald A. Sordillo.* For IBM PC, Apple, Atari, TRS-Color, TRS-80 Model III and Commodore Vic 20 users. Softbound. $18.95



40862. CRASH COURSE IN MICROCOMPUTERS. Second Edition. *Louis E. Frenzel, Jr.* Self-teaching, step-by-step presentation. Combbound. $21.95



41969-2. DESIGNING AND IMPLEMENTING LOCAL AREA NETWORKS. *Dimitris N. Chorafas.* The principles and practices of LANs. *Counts as 2 choices.* $32.95



42013. THE DESIGN AND CONSTRUCTION OF COMPILERS. *Robin Hunter.* Lexical analysis, storage allocation, code generation, syntax analysis, symbol table handling, and more. $27.50



67042. PASCAL FOR PROGRAMMERS. *Lecarme and Nebut.* Packed with examples, diagrams, and sample codes. $22.95



58635. LISPcraft. *Robert Wilensky.* The new added features, dramatically improved implementations and markedly upgraded interfaces of LISP. Softbound. $19.95



55098. INFORMATION SYSTEMS IN THE 80's: Products, Markets, and Vendors. *Ulric Weil.* From traditional data processing services to data/voice networking and on-line reprographics. $29.95



79157. SOFTWARE DEBUGGING FOR MICROCOMPUTERS. *Robert Bruce.* Illustrates how to discover "bugs" in programs. Assumes familiarity with BASIC. Softbound. $14.95



62627-2. MICROPROCESSOR SYSTEM DESIGN CONCEPTS. *Nikitas A. Alexandridis.* An easy-to-follow introduction to the design and development of 8-, 16-, and 32-bit microprocessors. *Counts as 2 choices.* $32.95



55365-2. AN INFORMATION SYSTEMS MANIFESTO. *James Martin.* "Most top management in the next ten years will be in charge of building an electronic enterprise."—Martin. *Counts as 2 choices.* $37.95



55857-2. INTERACTIVE PROGRAMMING ENVIRONMENTS. *Barstow et al, Eds.* The latest developments in programming methodology, time-sharing technology, artificial intelligence, software engineering, and more. *Counts as 2 choices.* $34.95



70747. PROGRAMMING IN MODULA-2. Second Edition. *Niklaus Wirth.* "A worthy successor to Pascal." —*BYTE.* $16.95



58811. LOGICAL CONSTRUCTION OF SYSTEMS. *Jean-Dominique Warnier.* Every aspect of system design—from data specification to the final dialogue between designer and user. $22.95



55865. INTERFACING MICROCOMPUTERS TO THE REAL WORLD. *Sargent and Shoemaker.* The complete guide for computerizing your home, office, or laboratory. $15.55

4 Good Reasons to Join

1. The Finest Books. Of the hundreds of books submitted to us each year, only the very finest are selected and offered. Moreover, our books are always of equal quality to publishers' editions, *never* economy editions.

2. Big Savings. In addition to getting either the McGraw-Hill Encyclopedia of Electronics and Computers for $3.00, or 3 books for $1.00 each when you join, you keep saving substantially, up to 30% and occasionally even more. (For example, your total savings as a trial member, including this introductory offer, can easily be over 50%. That's like getting every other book free!)

3. Bonus Books. Also, you will immediately become eligible to participate in our Bonus Book Plan, with savings up to 70% off the publishers' prices.

4. Convenient Service. At 3–4 week intervals (16 times per year) you will receive the Library of Computer and Information Sciences News, describing the Main Selection and Alternate Selections, together with a dated reply card. If you want the Main Selection, do nothing and it will be sent to you automatically. If you prefer another selection, or no book at all, simply indicate your choice on the card, and return it by the date specified. You will have at least 10 days to decide. If, because of late mail delivery of the News, you should receive a book you do not want, we guarantee return postage.

Plus more books to choose from . . .

79149-2. SOFTWARE ENGINEERING: A Practitioner's Approach. *Roger S. Pressman.* Decision tables and IPO charts, automated testing tools, graphical design tools, and more. *Counts as 2 choices.* $36.95

73625. REAL-TIME SOFTWARE. *Robert L. Glass.* A compendium of outstanding articles on real-time design. $24.95

80158. STANDARD PASCAL USER REFERENCE MANUAL. *Doug Cooper.* By the author of *Oh! Pascal!* Softbound. $12.95

55845. INTERACTIVE COMPUTER GRAPHICS. *Wolfgang K. Giloi.* Comprehensive, practical guide for generating effective graphic displays, picture representation and transformation, and more. $28.95

49353. FUNDAMENTALS OF DATA STRUCTURES IN PASCAL. *Horowitz and Sahni.* Evaluation of algorithm and data structure development. $26.95

77651. SELECTED WRITINGS ON COMPUTING. *Edsger W Dijkstra.* Articles and papers by a founding father of modern programming. $28.00

88012-2. WRITINGS OF THE REVOLUTION: Selected Readings on Software Engineering. *Edited by Edward Yourdon.* A collection of 25 hard-to-find articles. Softbound. *Counts as 2 choices.* $33.00

56714. INVITATION TO MAPPER™ (I): A Pragmatic Approach To End User Computing. *Harry Katzan, Jr.* MAPPER=Maintaining, Preparing and Producing Executive Reports. $24.95

34115. APL IN PRACTICE. *Edited by Allen J. Rosen.* Writing maintainable APL codes, evaluating telecommunications networks, using APL for construction accounting, and more. $25.00

32485. ALGORITHMS + DATA STRUCTURES = PROGRAMS. *Niklaus Wirth.* "A valuable, novel contribution to the computing science literature."—Edsger Dijkstra. $20.95

34623-2. ASSEMBLER LANGUAGE FOR APPLICATION PROGRAMMING. *Don H. Stabley.* Includes: data representation methods, program structures, loading, storing and editing data, and more. *Counts as 2 choices.* $35.00

37195. THE C PRIMER. Second Edition. *Hancock and Krieger.* A complete introduction to this increasingly popular language. Softbound. $14.95

80634. STOCK TRADING SOFTWARE GUIDE. *Rod E. Packer.* How to select the right package for the type of investor you are. Softbound. $15.95

38969. COBOL PROGRAMMER'S BOOK OF RULES. *Ledin et al.* $14.95

42303. A DISCIPLINE OF PROGRAMMING. *Edsger W. Dijkstra.* Includes: program derivation and composition, common mistakes; plus numerous other examples. $25.00

54565. THE ICON PROGRAMMING LANGUAGE. *R. and M. Griswold.* A general-purpose language with unique abilities to handle non-numeric data. $18.95

70684. PROGRAM DESIGN CONCEPTS WITH APPLICATIONS IN COBOL. *Philippakis and Kazmier.* Packed with sample programs, and basic techniques. $25.95

79152-2. SOFTWARE MAINTENANCE: The Problem and Its Solutions. *Martin and McClure.* Packed with illustrations, charts, checklists, diagrams, and code samples. *Counts as 2 choices.* $38.00

65233. OH! PASCAL! *Cooper and Clancy.* A lucid and witty self-teaching guide ideally suited to those who want to learn in a hands-on environment. $17.95

40041. CONTROLLING FINANCIAL PERFORMANCE FOR HIGHER PROFITS: An APPLE Business Users Guide. *Curtin, Alves and Briggs.* Extensively illustrated. Softbound. $14.95

40042. CONTROLLING FINANCIAL PERFORMANCE FOR HIGHER PROFITS: An IBM PC Business Users Guide. *Curtin, Alves and Briggs.* Extensively illustrated. Softbound. $14.95

37034. BUSINESS DECISION MAKING: An APPLE Business User's Guide. *Osgood and Molloy.* Softbound. $14.95

37036. BUSINESS DECISION MAKING: An IBM PC Business User's Guide. *Osgood and Molloy.* Softbound. $14.95

62615. MICROCOMPUTER GRAPHICS AND PROGRAMMING TECHNIQUES. *Harry Katzan, Jr.* A non-technical introduction to computer graphics—covering up-to-date advances in color coding and computer graphics technology. $22.50

48496. FILE & DATA BASE TECHNIQUES. *James Bradley.* File handling, CODASYL data base standards, hierarchical design, cost benefit analysis, and more. $22.95

63189. MOUSE: A Language For Microcomputers. *Peter Grogono.* An easy-to-install language especially suited for microcomputers. With sample programs and coded routines. $17.50

70726-2. A PROGRAMMER'S VIEW OF THE INTEL 432 SYSTEM. *Elliot I. Organick.* How the i432 "mainframe on a micro" works. *Counts as 2 choices.* $32.95

39888. THE COMPUTER COOKBOOK: How to Create Small Computer Systems That Work For You. 1983/84 Edition. *William Bates.* A classic reference. $21.95

If the reply card has been removed, please write to
The Library of Computer and Information Sciences
Dept. 7-CT9, Riverside, N.J. 08075
to obtain membership information and an application.

Byte 1/85

SuperSoft Languages
When Performance Counts

A programmer's most important software tool is the language compiler or interpreter he uses. He has to depend on it to work and work well.

At SuperSoft, we believe it. That's why we offer three excellent compilers: SuperSoft FORTRAN, SuperSoft C, and SuperSoft BASIC. They answer the programmer's need for rock solid, dependable performance on microcomputers.

SuperSoft A

A true Ada* subset

SuperSoft A is a completely standard subset of the Ada language, incorporating approximately 63% of the standard Ada syntax and including such important features as packages and separate compilation. For CP/M-80 microcomputers: $300.



SuperSoft C

SuperSoft C is a high-powered, full-featured C compiler designed for serious C applications. It is fast – both in compilation and execution, and it is packed with more than 135 library functions (all delivered in source code form). SuperSoft C produces optimized assembly code, and object code can be ROMed.

SuperSoft C (for CP/M-80, CP/M-86, MS DOS, PC DOS): $350

SuperSoft FORTRAN

With large code and data.

SuperSoft FORTRAN version 2.0 with large code and data space is now available under MS DOS and PC DOS. It gives you the power to compile extremely large FORTRAN programs on micros. It allows double precision and complex numbers, full IEEE floating point, and a full range of other important features for the serious FORTRAN programmer. Both 8087 support and a RATFOR preprocessor are optionally available.

FORTRAN (CP/M-80 & 86, MS DOS, PC DOS): $325
8087 support: $50 RATFOR: $100



SuperSoft BASIC

The SuperSoft BASIC compiler lets you get serious with business and financial programs. It uses BCD math to give you highly accurate results for demanding applications. SuperSoft BASIC is a true native code compiler that is generally compatible with Microsoft's BASIC interpreter. And an additional bonus – no run time license fee is required.

SuperSoft BASIC Compiler (for MS DOS, PC DOS, and CP/M-86): $300

Also available for programmers:

Star-Edit, a full-featured programmer's text editor: $225.00
Disk-Edit, an invaluable programmer's disk data editor: $100.00

To order call: **800-762-6629**

In Illinois call **217-359-2112**

SuperSoft

SuperSoft, Inc., 1713 S. Neil St., P.O. Box 1628, Champaign, IL 61820

In conjunction with SuperSoft, Supersoft FORTRAN was developed by Small Systems Services, Urbana, IL, a leader in FORTRAN development.

Japanese Distributor: ASR Corporation International, TBL Building, 7th Floor, 1-19-9 Toranomon, Minato-Ku, Tokyo 105, Japan Tel. 03-5025550. Telex 222-5650 ASRTYO J.

*Ada is a trademark of the Department of Defense
PC DOS is a trademark of International Business Machines.
MS DOS is a trademark of Microsoft.
CP/M-80 and CP/M-86 are trademarks of Digital Research, Inc.

Inquiry 339

BY BRUCE D'AMBROSIO

EXPERT SYSTEMS—MYTH OR REALITY?

The Department of Defense has identified artificial intelligence (AI) as one of the 10 most critical technologies to pursue in the remainder of this century. The Japanese have launched an ambitious fifth-generation computer project with AI's application, "expert systems," as one of its cornerstone technologies. The British and the French have responded with major national projects of their own. And the United States, currently the leader in this area, recently increased funding for basic research in AI. But what are expert systems, what is all the hoopla about, and is it justified?

A SHORT HISTORY OF AI

In the beginning there was the computer—and it was very difficult to program. Then John Backus et al. invented FORTRAN and the world of numeric programming was born. Shortly afterward, John McCarthy invented LISP and, with it, symbolic programming came into existence. In the same way that FORTRAN was an outgrowth of numerical analysis, LISP was basically an outgrowth of abstract mathematics, in particular Alonzo Church's lambda calculus. The result of this was that early users of LISP spent most of their time in search of those things that abstract mathematicians seem to love best—elegant and terse solutions to broad classes of problems. During the 1960s computer scientists developed a number of general problem-solving mechanisms, and in the late 1960s and early 1970s they tried to apply these mechanisms to "real" problems. For the most part, these attempts resulted in dismal failure. In fact, the results were so disappointing that one country, Great Britain, completely abandoned its AI research and development effort.

Artificial intelligence is being applied

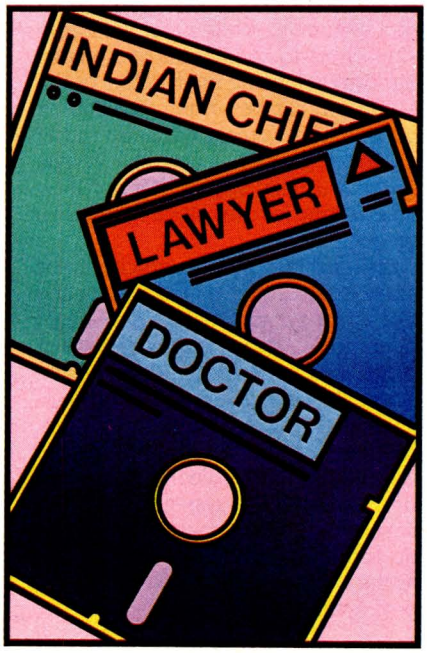

ILLUSTRATED BY CHRIS SPOLLEN

What was the problem? Consider one particular case—that of determining the molecular structure of a compund when given its chemical formula and other information. This can be formulated as a "generate and test" problem. The system consecutively generates each of the possible structures the compound can have, based on its formula. It then tests the candidate structures against the other evidence to determine which one is correct. This algorithm works fine for a compound with few possible structures. However, the number of possible structures for any compound of interest to a chemist runs into the millions, and all hope of ever finding a solution vanishes, even on the fastest computers. The solution to this problem is not faster computers. Adding a single atom to a compound can increase the number of possible structures by a factor of hundreds, and computers are only getting faster by a factor of 10 or so each decade.

Researchers realized that what was needed was knowledge—enough information to understand the subject at hand. If, instead of generating all possible structures, the program only generated those that were physically realizable, the number of candidate structures would drop from millions to thousands. It would then become

(continued)

Bruce D'Ambrosio (2156 Word St., #4, Berkeley, CA 94705) has a B.S.E.E. and M.S. from the University of California at Berkeley and is still there working toward his Ph.D. He lists motorcycles as his hobby.

possible to test all candidates against the evidence to determine which would be the correct one. This is the approach that was taken in Dendral, a landmark AI system for elucidating chemical structure when chemical formula and mass spectrograph evidence are known.

PERSONAL COMPUTERS AND EXPERT SYSTEMS

Many people assume that AI and large computers are synonymous. This is less true today than it was in the past. For expert systems in particular, one of the promises is *inexpensive* distribution of expertise.

Much of the expert-systems development now taking place follows a fairly standard model. First, a production-rule interpreter is written in LISP, then the actual rules for an expert system are written. This has two impacts on the development environment. First, LISP itself is usually interpreted. That means that the final production rules are interpreted by a program that is also executed interpretively, and things run slowly. For this reason AI researchers like fast central processing units. Also, even if the production-rule interpreter is fairly small, the LISP interpreter must be in memory simultaneously (as well as all of the production rules themselves), and most serious LISP systems require at least 1 megabyte of main memory to run well. To my knowledge the only LISP systems available for computers with 64K bytes (or smaller) of address space are toys. Recently, however, Gold Hill Computer announced a LISP implementation for IBM PCs with memories of at least 256K bytes. While details about this system are still sketchy, this seems like it might be a product for building real systems. Still, interpreted LISP on a 5-MHz 8088 processor is almost useless because of its slowness. However, Gold Hill also says it will release a LISP compiler in the near future, and the system would then become a viable development tool.

More useful, but also more expensive, are the major research LISP systems that have been ported to several of the 68000-based UNIX systems currently available. However, with adequate memory (2 megabytes) and a hard disk, these cost $15,000 and up.

Another alternative is to abandon LISP. A major reason for building expert systems in LISP is that writing interpreters in it is easy. However, if you're more concerned with building rule-based systems than with experimenting with rule interpreters, you should be able to implement a rule interpreter in a language that makes more modest demands on computer resources. Several research projects have been conducted in which the system was designed in a LISP-based environment and then ported to either BASIC (Puff—a pulmonary diagnostic program developed by Stanford and UCSF) or FORTH (Delta/Cats—a locomotive diagnostic program developed at General Electric research). Both systems now run on a small PDP-11 and I have heard that Delta/Cats is being ported to an IBM PC. Also, rumor has it that IBM is developing an expert-system shell (rule interpreter and associated utilities) in Pascal for operation on a variety of their computers. Taking this approach, you should be able to develop a consultation-style expert system on a computer with from 128K bytes to 256K bytes of memory. Backward-chaining interpreters of the Mycin sort can be written so that their computation demands are also rather modest. In fact, consultation-style systems usually spend most of their time waiting for user input, rather than computing.

Disk facilities are not crucial, since many expert systems load all data and rules into memory before they begin operation. Again, 512K bytes to 1 megabyte of on-line storage should be adequate for both the rule interpreter and the text of several hundred rules. Most expert systems seem to require from 500 to 2000 rules. In fact, some of the new expert-systems producers have taken this approach. These start-up companies usually target IBM PCs as the hardware for their developed expert systems.

A second dominant theme in AI, "pattern-directed inference," was developed in the early 1970s. During this period, AI returned to its roots, so to speak, to pick up a technique for higher-level symbolic-program organization. This technique is alternately called pattern-directed inference or "production rules." Once the need for extensive domain-specific knowledge was recognized, pattern-directed inference seemed to provide an answer to the dual questions of how to represent this knowledge inside the computer and how to use it.

The twin themes, then, of extensive domain-specific knowledge and pattern-directed inference dominate expert systems work today.

KNOWLEDGE

It is all very well to say that a system needs knowledge, but, by itself, this statement is of little use in system design. Specifically, it raises two questions. First, what kinds of knowledge are needed? Second, how will this knowledge be used? In some sense, a house's furnace thermostat can be said to contain knowledge about heating houses, but no one would call it an expert system. At least three kinds of knowledge have been identified as useful for symbolic problem solving. These are simple domain *facts*, *relations* between these facts, and *methods* for using these relations in problem solving. (Other systems-development-related questions are addressed in the text box "Personal Computers and Expert Systems" at left.)

To make this taxonomy concrete, let's look at an example problem of determining where to invest some money. (A system that seriously addresses this question is far beyond the scope of this article. The following only suggests how you might use expert-systems technology to address this problem. Do not judge it for its financial acumen.) To simplify the problem, consider only three alternatives: a "safe" investment (e.g., Treasury bills or certificates of

(continued)

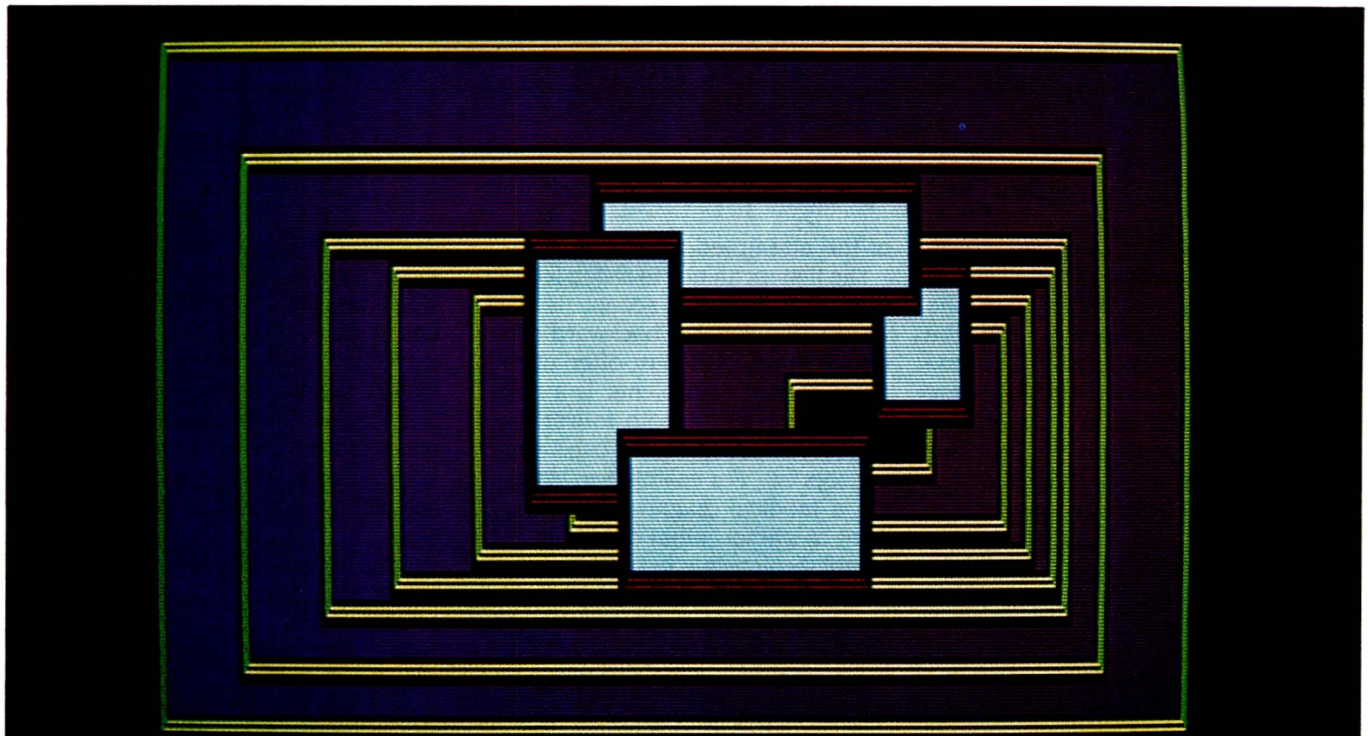

WHEN YOU BUILD A HOUSE . . . YOU DON'T NEED TO MAKE THE WINDOWS YOURSELF. NOW . . . THE SAME IS TRUE WHEN YOU'RE WRITING CODE.

Why did Simon & Schuster, 3COM, Tymshare, and Revlon choose VSI—The Window Machine?

(and how come you can buy it for such a low price?)

$59.95

Windows With A View Toward The Future

The Window Machine™ occupies only 12K! Written in tight, fast Assembler, it performs like a racing engine...with more power than you'll probably ever need. Yet, it's an engine designed to fit in the vehicle of your choice...from a "stripped-down" 128K IBM PC to a fully loaded AT. The programs you write today will run on the broadest range of machines possible... now, and in the future.

Windows Bigger Than Your Screen?

Here's where the VSI part of our name fits in. VSI means Virtual Screen Interface. Behind each window, there's a much bigger picture. VSI defines virtual screens rather than just windows. The window itself shows whatever portion of its virtual screen you wish to exhibit at any given point in your program. Each screen can be up to 128 x 255 (columns x rows, or rows x columns). And there are more than 100 screen primitives at your command.

These are coders' windows... designed to be built into the programs you are writing. They can overlap, move anywhere on the screen, grow, shrink, vanish or blink. They can be bordered in anything from a simple line to flashing asterisks...or even no border at all. And you can have up to 255 of them at a time! Color or monochrome ...of course!

Multilingual Windows

You can order The Window Machine with the language interface of your choice: C, Pascal, Compiled Basic, Fortran, Cobol, or PL1. We've even recently completed an interface for Turbo Pascal*, so that now true, full-featured windowing can be utilized with this fine compiler. (Turbo's own built-in "windowing" procedure is extremely limited).

Windows That Won't Break You

We decided to save you a lot of money. So, we left behind fancy binders, monogrammed slip cases and plastic presentation boxes. Instead, you'll find an extremely powerful tool and a 200 page manual written with an eye toward simplicity, clarity and completeness. (We figured if you wanted ribbons and bows you could always add them yourself.)

And by offering you the product ourselves, we were able to cut out all the middlemen and save you a tremendous amount of money.

*Turbo Pascal is a Trademark of Borland International

VSI *The Window Machine™*

Available for the IBM PC, XT, AT, IBM Compatibles, and the Wang, T.I., HP 150, and Tandy 2000.

The Window Machine Includes:

- *Zoom Windows*
- *Multiple Virtual Screens (up to 255)*
- *Choice of Borders (including flashing borders)*
- *Support for all Color and Monochrome Video Attributes (no graphics card required)*
- *Built-in Diagnostics*
- *And much, much more*

ORDER YOUR COPY OF VSI—THE WINDOW MACHINE TODAY
For Visa, MasterCard and American Express orders call toll free:
1-800-227-3800 ext. 986

The Window Machine™ $59.95 Shipping and handling included

LANGUAGE INTERFACE:

☐ Lattice C ☐Realia Cobol ☐Microsoft Basic Compiler ☐ Microsoft Fortran
☐ PL1 ☐Microsoft Pascal ☐Turbo Pascal (full featured true windowing)

COMPUTER _____

Name _____

Address _____

City _____ State ____ Zip Code _____

☐ Check ☐Money Order ☐VISA ☐MasterCard ☐ American Express

Card # _____ Exp. Date _____

*California residents: tax included. Orders outside the USA: please add $5 for shipping and handling.

AMBER SYSTEMS
1171 S. Saratoga-Sunnyvale Road
San Jose, CA 95129

AMBER SYSTEMS, INC. 1171 S. Saratoga-Sunnyvale Road, San Jose CA 95129

FOR DEALER INQUIRIES: CALL OUR 800 NUMBER

deposit), blue-chip stocks, and growth stocks. Simple facts in this domain will include the age of the investor, the amount to be invested, and the amount already in each of the three categories mentioned above. These are formalized in figure 1. In addition, you will meet some simple relations between these facts to build your system, such as relations between the investor's age and the desired amount of money in each category. Some relations that might be in such a system are shown in figure 2. Finally, there is knowledge about how to solve problems, given facts and relations. For your sample problem, at least two strategies are possible. You could ask the user for all applicable information and use the known relations to deduce which investments are appropriate. Or you could try to prove that *each* possible form of investment is the proper one and ask the user questions as they come up in the course of the attempted proofs.

The first technique is called forward reasoning, and the second is backward reasoning or "backward chaining." A third possibility, often used in more complex problems, is a mixed strategy, in which both forward and backward reasoning are used where appropriate. For example, in attempting a medical diagnosis, you might want to gather initial data first, then establish plausible hypotheses to explain this data (forward reasoning from facts to conclusions), then predict unobserved symptoms (backward reasoning from conclusions to facts that would support them) and order tests to check for the presence of these unobserved symptoms (backward reasoning again), and finally use the test results to confirm or rule out the hypothesized diagnosis (forward reasoning again).

Now that you know what kinds of knowledge you need to solve the investment problem, you have to consider one additional factor. What would you like to accomplish with this knowledge? Initially, you want to use it to recommend an investment, but expert systems typically have additional goals. Often, expert systems are expected to be able to use their knowledge to explain why questions are being asked and to justify conclusions once they are reached. They can do this because the relationships between data items are represented explicitly within the system as further data, rather than as procedures or pieces of code (e.g., Pascal if statements). Usually, you should represent these relationships as *rules*, using a technique called pattern-directed inference.

age	The client's age in years
amount-to-invest	Amount the client wishes to add to his investment portfolio
safe-cash-amount	Amount the client has already placed in "safe" investments (e.g., T-bills or CDs)
blue-chip-amount	Amount the client has already tied up in "blue-chip" investments
growth-amount	Amount the client has already invested in "growth stocks"
safe-cash-target	Target amount the client should have in "safe" investments
blue-chip-target	Target amount the client should have in "blue-chip" investments
growth-target	Target amount the client should have in "growth stocks"
enough-safe	The truth of the statement "the client has enough cash in safe investments"
enough-blue-chip	The truth of the statement "the client has enough cash in blue-chip investments"

Figure 1: *Simple facts for the toy investment advisory.*

1 The client should have a reasonable amount of money in "safe" investments before entering the stock market.

2 The client should have a reasonable amount of money in blue-chip stocks before venturing into high-risk "growth" stocks.

Age	Amount in "safe"	Amount in "blue-chip"
< 30	$1000	$1000
30 — 40	$3000	$3000
40 — 50	$6000	$4000
50 — 60	$9000	$8000
> 60	$9000	$20000

Figure 2: *The informal statement of rules for the toy investment advisory.*

PATTERN-DIRECTED INFERENCE

Pattern-directed inference is actually a rather simple technique. The basic idea is that you can express knowledge, especially relational and methodological knowledge, as a set of "condition/action" pairs. That is, if you can prove the condition part of a pair, then you get to perform the action part. The condition is a simple conjunction of elementary queries; it can be thought of as the if part of an if...then statement. I hope that the word "query" will make you think of database queries, which are similar. That is, the condition need not be a simple test as in the usual programming-language if statement. Rather, the condition can be more general, as in database-query language. For example:

```
IF   (safe-cash-amount > safe-
       cash-target) and (blue-chip-
       amount > blue-chip-target)
THEN (invest growth-stocks
       amount-to-invest)
```

One difference between this example and a standard programming-language if statement is that both the "safe-cash-amount" and "safe-cash-target" may be unknown when the rule is first tested. Additionally, there may be several rules that can make conclusions about "safe-cash-target."

(continued)

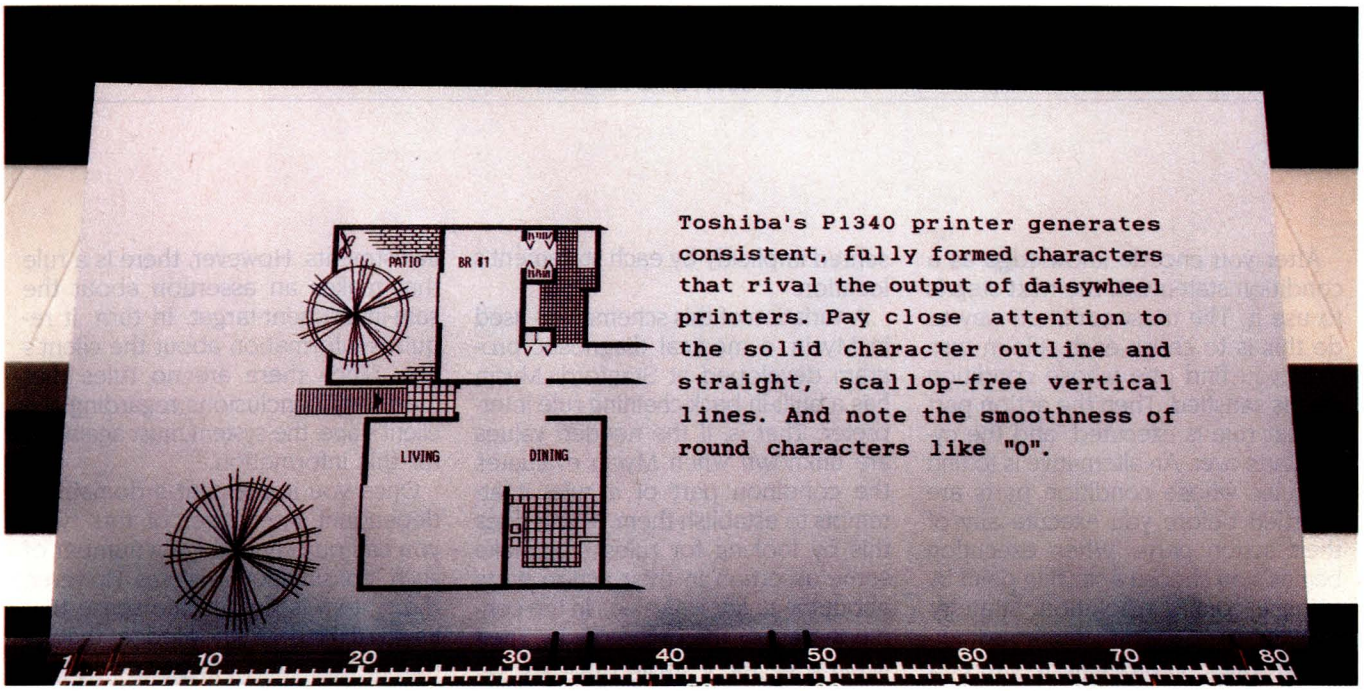

Now you can make a great impression for under a grand. The Toshiba P1340 3-in-One printer.

Toshiba has been a pioneer in printer technology and development. Where we have led, others can only follow. Our P1340 printer is an impressive example—the first 3-in-One printer for less than $1,000 that provides high-speed, letter-quality copy, high-resolution graphics and an advanced 24-pin dot matrix print head. And at only $995, the Toshiba P1340 is priced well within your reach.

Perfect impressions. Our unique high-density 24-pin dot matrix print head gives you sharp, clean results from any of the P1340's three resident typefaces. With its 8-mil print wire and overlapping dot pattern, you get letter-quality daisy wheel sharpness and definition—at dot matrix speed.

Impressive speed. You won't have to give up speed for letter-quality results. Because the Toshiba P1340 gives you the best of both. At 54 cps, you get letter-quality copy at better than twice normal letter-quality speed. And even faster draft copy at 144 cps.



An impressive eye for detail. The Toshiba P1340 doesn't just give you high speed, letter-quality type. At 180 x 180 dots per square inch, it also gives you high-resolution graphics that lead the industry.

Impressive versatility. The P1340 is versatile enough to give you your choice of three different resident typefaces. With bold type, underscores, super- and subscripts. And a wide range of condensed printing, line and proportional spacing choices.

And since it features Qume SPRINT 5™ emulation and choice of parallel or serial interface, the Toshiba P1340 3-in-One™ printer can work with an impressive number of word processing programs. And almost every microcomputer, including IBM PC® and Macintosh.™

Impressive price. The Toshiba P1340 printer. It's more than an impressive 3-in-One printer. At only $995, it's also a great buy. For more information call 1-800-457-7777, Operator 32.

SPRINT 5 is a trademark of Qume Corp. IBM PC is a trademark of International Business Machines. Macintosh is a trademark of Apple Computer Inc.

In Touch with Tomorrow

TOSHIBA

TOSHIBA AMERICA, INC., Information Systems Division

After you encode knowledge as a condition statement, the next step is to use it. The most common way to do this is to check each rule in turn until you find one whose condition part is satisfied. Then the action part of that rule is executed, and the cycle starts over. An alternative is to find all rules whose condition parts are satisfied before you execute any of their action parts. When execution begins, you choose a starting point by using a "conflict resolution" strategy. In either case, a production-rule interpreter must implement a two-part "recognize/act" cycle. The production-rule interpreter must first recognize which rules apply and then act (i.e., apply the relevant rule or rules). AI programmers have implemented many variations of this scheme, but you have to remember that this style of execution couples the rules loosely. In other words, it generally does not matter where you insert a rule in a production system. If you want to handle a new condition, you simply insert the appropriate rule, thus expanding system capability as in figure 3. This is in marked contrast to the usual "rat's nest" of if statements in a typical program. Normal if statements can be hard to update because their control information (that is, when they should be used) often is represented implicitly by each statement's location.

A variation of this scheme was used in Mycin, a medical diagnostic program developed at Stanford. Mycin has a built-in back-chaining rule interpreter. That is, if the needed values are unknown when Mycin evaluates the condition part of a rule, it attempts to establish them. Mycin does this by looking for rules that make some assertion in their action parts about the unknown values in the condition part of the original rule. Then it looks to see if these rules are executable. This might, of course, result in back-chaining to yet another level. Consider the following example. Suppose you want to show that blue-chip stocks are the appropriate investment for someone. You might have a rule that says: If the amount already invested in safe Treasury-note-type instruments is greater than the safe-investment-target amount, take some of that money out of those instruments and put it into blue-chip stocks. Through backward chaining, the system looks for rules that will first establish the safe-amount-invested, and then the safe-investment-target amount. There are no rules that draw any conclusions about the safe-amount-invested, so the system simply asks how much is tied up in "safe" investments. However, there is a rule that makes an assertion about the safe-investment-target. In turn, it requires information about the client's age. Since there are no rules that make any conclusions regarding the client's age, the system must again ask for this information.

Once you implement a domain-independent interpreter of this type, you can quickly build any number of such "consultation" systems. However, the system is rigid in the sense that its third kind of knowledge, that of how to use the rules to solve problems, is hard-wired. And because it's hard-wired, you can't build a more sophisticated forward- and backward-reasoning problem solver using a Mycin-style rule interpreter since there is no way to make it deviate from its built-in control strategy.

By examining its recursion stack, the rule interpreter can answer some questions the client might pose at this point. For example, if the client wants to know why the expert-system program is asking a particular question, the interpreter can answer by listing its "goals." The system asks the client's age to determine his "safe-investment-target" and attempts to determine his "safe-investment-target" to recommend an amount to invest in blue-chip stocks.

If the production-rule interpreter notes which rules were applied during the consultation, it can "justify" its recommendation by citing the rules it used to arrive at its conclusions. If the client asks why the system recommends he invest $5000 in blue-chip stocks, the system can respond: "Rule xx says that if your safe-investment-amount is greater than your safe-investment-target and your blue-chip-amount is less than your blue-chip-target, then you should invest X% of your net worth in stocks." This facility is especially important in systems designed to advise professional people, who don't often follow advice blindly. This brings up the final point: rule-based inference seems to be a natural way to express many kinds of knowledge, especially knowledge that

(continued)

```
IF (enough-safe = TRUE) AND (enough-blue-chip = TRUE)
THEN (invest-growth (amount-to-invest))

IF (safe-cash-amount ≥ safe-cash-target
THEN (enough-safe TRUE)

IF (age < 30)
THEN (safe-cash-target $1000)

IF (age ≥ 30) AND (age <40)
THEN (safe-cash-target $3000)

IF (age ≥ 40) AND (age <50)
THEN (safe-cash-target $6000)

IF (age ≥ 50)
THEN (safe-cash-target $9000)

IF (client-in-rush = TRUE)
THEN (enough-safe TRUE)
```

Figure 3: *The formal statement of some of the rules for the toy investment advisory. Note the last rule. This is an example of how new rules can be easily added to modify the performance of a rule-based system after the system has been constructed.*

BASF QUALIMETRIC™ FLEXYDISKS®
BUILT FOR ETERNITY - WARRANTED FOR A LIFETIME.

BASF Qualimetric FlexyDisks® offer you more...an extraordinary new lifetime warranty. The BASF Qualimetric standard is a dramatic new international standard of quality in magnetic media...insurance that your most vital information will be secure for tomorrow when you enter it on BASF FlexyDisks today.*

We can offer this warranty with complete confidence because the Qualimetric standard reflects a continuing BASF commitment to perfection...a process which begins with materials selection and inspection, and continues through coating, polishing, lubricating, testing, and 100% error-free certification. Built into our FlexyDisk jacket is a unique two-piece liner. This BASF feature traps damaging debris away from the media surface, and creates extra space in the head access area, insuring optimum media-to-head alignment. The result is a lifetime of outstanding performance.

When your information must be secure for the future, look for the distinctive BASF package with the Qualimetric seal. Call 800-343-4600 for the name of your nearest supplier.

Inquiry 400

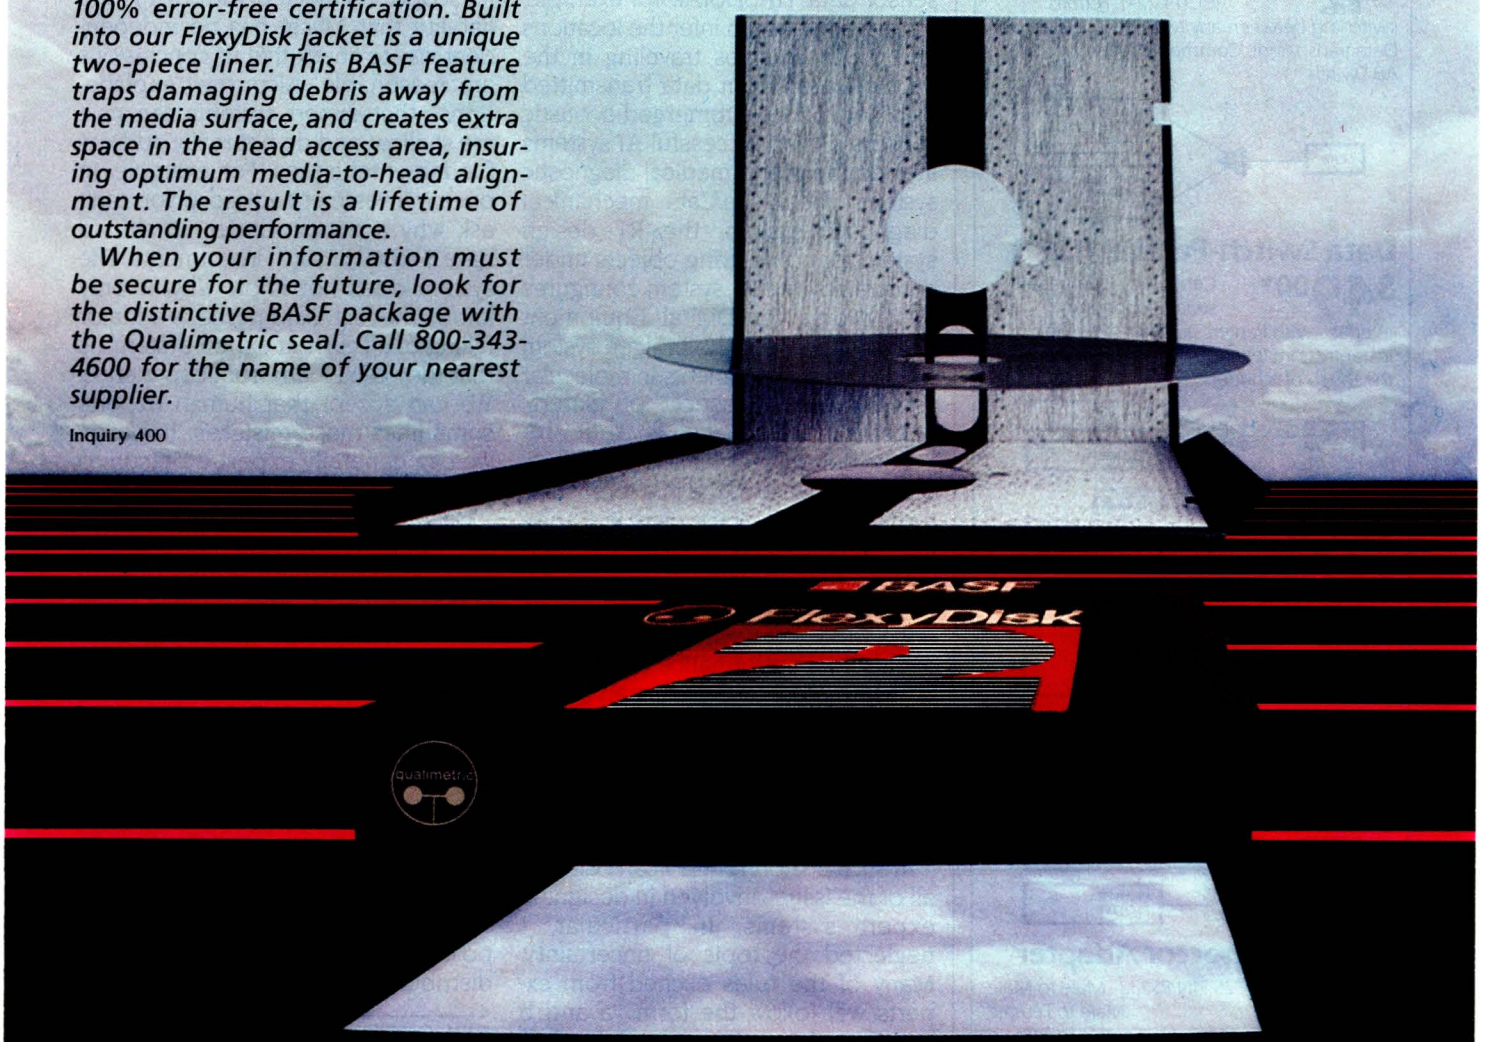

ENTER TOMORROW ON BASF TODAY

BASF

*Contact BASF for warranty details

© 1982, BASF Systems Corporation, Bedford, MA

Inquiry 362

SWITCH
TO PRODUCTIVITY IN YOUR PC SYSTEM
WITH FACTORY DIRECT PRICES

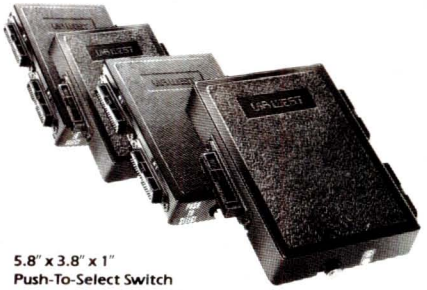

5.8" x 3.8" x 1"
Push-To-Select Switch

Data Switch-Serial (DSS)
$42.00* For RS232 applications (CCITT V.24). Permits switching between any two serial devices. Data transparent. Commonly called an AB Switch.



Data Switch-Parallel (DSP)
$49.00* Centronics–compatible switch for parallel interface with Printers or Plotters. Switch instantly from letter-quality to dot matrix at the touch of a button.



X Switch-Serial (XSS)
$55.00* Two serial computers can now share 2 serial devices. RS232 applications.



X Switch-Parallel (XSP)
$69.00* Two computers share two parallel printers or plotters.



Cable Connector Adapter
$15.00* each 25 PIN RS232–Male to Male, Male to Female, Female to Female

*Shipped freight collect. Add $3.00 per product for post-paid delivery. Checks, Visa and MasterCard accepted. Quantity discounts avail. AZ Res. add 7%.

VIA WEST, INC.
"The Interface Company"
534 North Stone Ave., Tucson, Arizona 85705
To order by phone call:
(602) 623-5716

experts use to solve many kinds of difficult problems.

Putting the Pieces Together

You now have three kinds of knowledge and a pattern-directed inference system for using this knowledge to solve problems. What can you expect from them?

Expert systems are best at solving data-interpretation problems, such as inferring situation descriptions from sensor data. HASP/SIAP, for example, is a system that can infer the locations and types of ships traveling in the Pacific Ocean from data transmitted by a network of submerged acoustic sensors. Other successful AI systems include the Mycin medical diagnostic system, the Delta/Cats mechanical diagnostic system, the R1 design system for configuring objects under constraints (the R1 system configures VAX orders for Digital Equipment Corporation), and the Molgen system for planning experiments in molecular genetics. A key aspect of expert-systems technology is that its production-rule formalism permits expression of knowledge in a form close to the way an expert uses it. Therefore, systems can be built by interviewing relevant experts and directly coding their problem-solving knowledge into rules. Such systems provide expert-level performance by giving us an automated copy of human expertise. This is the reason for much of the current excitement about expert systems. The technology promises to be an inexpensive way to widely distribute human expertise.

In such a short article I can't discuss all of the issues involved in designing expert systems. In particular, I neglected the topic of uncertainty. Many of the rules elicited from experts will follow the form "a and b together often imply c," and the data available for problem solving is often either unreliable or vague. Many expert systems have built-in facilities for dealing with uncertain information. These may include an ability for a "degree of belief" about various facts (e.g., medical diagnosis) or the ability to make an assumption and later retract it if it leads to undesirable results (as in a planning system).

Successful as expert systems have been, several major problems limit their applicability. First, the technology described here has no way of recognizing when a problem is outside its domain of expertise. If you present Mycin with a broken arm, it may not only fail to recommend a cast, but it might not even recognize that this patient's ailment is beyond its scope. Connected with this is the liability that Mycin has no independent way to check that its conclusions are reasonable. Also, the "explanations" that expert systems can give are shallow and do not really address fundamental issues. For example, in our toy investment advisory, you can't ask why a person under 30 should have $1000 in "safe" investments. The system does not know why, it only knows the fact. And perhaps a major failing of all current expert systems is that they can't learn from experience. We can accept that human experts sometimes make mistakes; however, we can generally expect a person to learn from that error and not repeat it.

Despite these failings, all of which are being researched, the current generation of expert systems offers a higher level of performance than more traditional programming techniques. You can expect to see their increasing use in more and more situations where expert advice is widely needed and in short supply. So far, this has already happened in the field of finance. Deregulation has expanded the number of financial services beyond the number of knowledgeable financial advisors. As a result, several companies are pursuing the possibility of using expert systems to distribute their financial advice. ■

BIBLIOGRAPHY

1. Barr, A., and E. Feigenbaum. *The Handbook of Artificial Intelligence, Volume 2*. Los Altos, CA: William Kaufmann Inc., 1982.
2. Hayes-Roth, F., et al. *Building Expert Systems*. Reading, MA: Addison-Wesley, 1983.
3. Winston, P. *Artificial Intelligence*. Reading, MA: Addison-Wesley, 1977.

A knee-top APL system for idea processing. A new epoch in the history of personal computing.

Watch for us at the COMDEX Show in JAPAN, March 26—28, 1985.

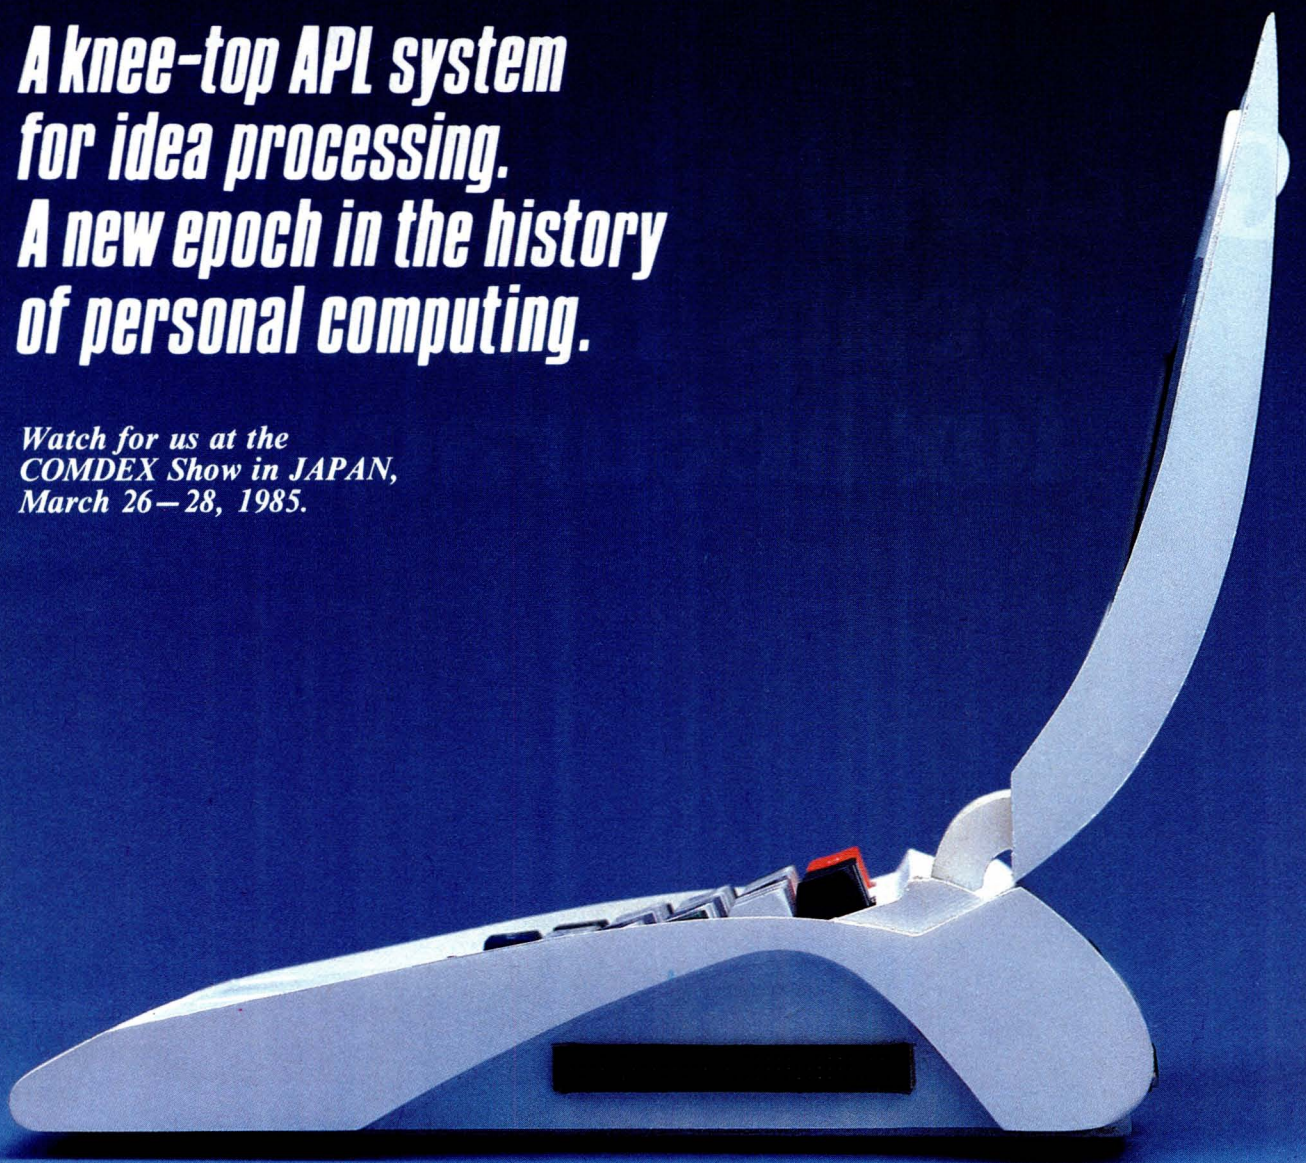

Ampere Computer

The Ampere Computer Model WS-1 represents the best of a new breed of personal computers. Designed by a free-thinking innovative team, it combines the flexibility of state of the art technology with the power of the most robust APL interpreter available on the market today.

- *Battery operation ● 8 MHz 68000 CPU*
- *64K-512K bytes RAM ● 128K bytes ROM*
- *25× 80 character LCD ● Bit-mapped Graphics*
- *Multiple Windowing ● Multi-job, Multi-task OS for powerful networking*
- *Coherent DB-WP-CALC-Graphic*
- *Intelligent Phone Function*
- *Voice/Data Storage Microcassette*

ampère

For Distributorship information and product details, please contact:
Ampere, Inc., Asahi Bldg., 5-20, 7-chome Nishi-Shinjuku, Shinjuku-ku, Tokyo, Japan
Phone: 03-365-0825, Telefax 03-365-0999, Telex J33101 AMPERE
IP Sharp Mail Box Code: AMP (Group Code APLWS)

General DataComm beats Hayes for accuracy.



And we can prove it.

We put our 1200 bps modem to the critical test. We stacked it up against Hayes, one of the "smart" modems.

The Performance

Hundreds of phone calls were carefully monitored, analyzed, and verified by telecommunications engineers. After exhaustive testing, the results were conclusive: when line quality was good, our modem was one and a half times more accurate than Hayes. When line quality was bad, however, our modem was up to ten times more accurate. And when line quality was really bad, their error rate shot up to as much as 100 times ours! The errors ranged from misspelled words to incorrect numbers. The implications for modern business are understandably serious.

The Reliability

Then we went inside and did a component count. The final score: Hayes 252, us 155. This can be viewed two ways: Either Hayes has a 60% better chance of developing part failure, or our modem has a 60% better chance of delivering higher reliability.

Eliminating operator risk is as important to us as eliminating errors. With our modem there's virtually no risk of electrical damage because there are no internal switches to deal with. General DataComm modems automatically select all call parameters.

The Company

The General DataComm intelligent modem is the newest product of a company that has been designing data communication systems for 15 years. A company whose customer list is a "Who's Who" of international business. Most of the Bell operating companies, and other telephone companies in the U.S. and Canada. Major banks. Brokerage firms. And many of the Fortune "500."

We build multiplexers, modems, local area and digital network products, and the most complete networking systems on the market. Now we're applying the technology that won the respect of big business and Bell to the personal computer market. With a line of 300 and 1200 bps modems and our own communications software.

The General DataComm modem. We put it to the critical test. Now it's ready for the ultimate test. Yours. To find the dealer nearest you, contact the Personal Computer Products Dept., (203) 574-1118. General DataComm, Middlebury, CT 06762-1299.

Inquiry 141

General DataComm

The best connections in the business.



Reviews

Reviewer's Notebook
by Rich Malloy **289**
The HP 110 Portable Computer
by Mark Haas **290**
Gifford's MP/M 8-16
by Charles H. Strom **305**
Lotus's Symphony
by Dick Pountain **317**
MagicPrint
by Alan R. Miller **329**
The Hewlett-Packard ThinkJet Printer
by Mark Haas **337**
The TI Omni 800/Model 855 Printer
by Mark Haas **345**
Review Feedback **353**

THERE'S A CERTAIN understandable fascination with the idea of a computer small enough to go with you anywhere yet powerful enough to handle your work without forcing you to make excuses. We're not exactly up to our chins, or laps, in these briefcase-size machines, but enough are now coming out so that we can see they're being regarded as useful devices rather than curiosities. The HP 110, reviewed this month by Mark Haas, fills the description of briefcase-size (13 by 10 by 2⅞ inches, 9 pounds). As to whether it's a tool or just a conversation piece, Mark's review provides an answer.

Our second review details the other end of the fashion spectrum. S-100 systems are far from new but have shown a resiliency that belies the occasional news of their demise. As evidence, Charles Strom presents Gifford's MP/M 8-16, developed from CompuPro hardware and Gifford's operating system, with a variety of disk controllers and other options. The Gifford MP/M 8-16 won't be joining you in the coach section of the airplane, but there's an interesting story here, told by an informed user.

We previewed Lotus's Symphony back in July when those cryptic television commercials first appeared. At the time we promised we'd come back to it after giving it a more thorough going-over. Dick Pountain, BYTE's U.K. editor, fulfills our promise, pointing out some of the differences between its rumored attributes and reality. If you're at all interested in integrated software, this is an article you should read.

For readers looking for a way to create finished documents with a professional, typeset appearance, Alan Miller has reviewed MagicPrint from Computer EdiType Systems. A print processor rather than a word processor, MagicPrint has specific applications and specific limitations you should be aware of before you buy.

The subject of printing is taken up from another angle in Mark Haas's review of the HP ThinkJet printer. Mark reports on its pluses and minuses and gives close inspection to some of its more curious aspects.

Finally, we called on Mr. Haas again to give us a review of the TI Omni 800/Model 855 printer. This unit has plug-in ROM cartridges that carry the different fonts and can give you more variety in document preparation. A nice idea, but how well does it deliver? Mark gives you a pretty good idea.

—Glenn Hartwig, Technical Editor, Reviews

Think BEFORE YOUR NEXT PC!

Your PC to Time Sharing System

KT-7/PC

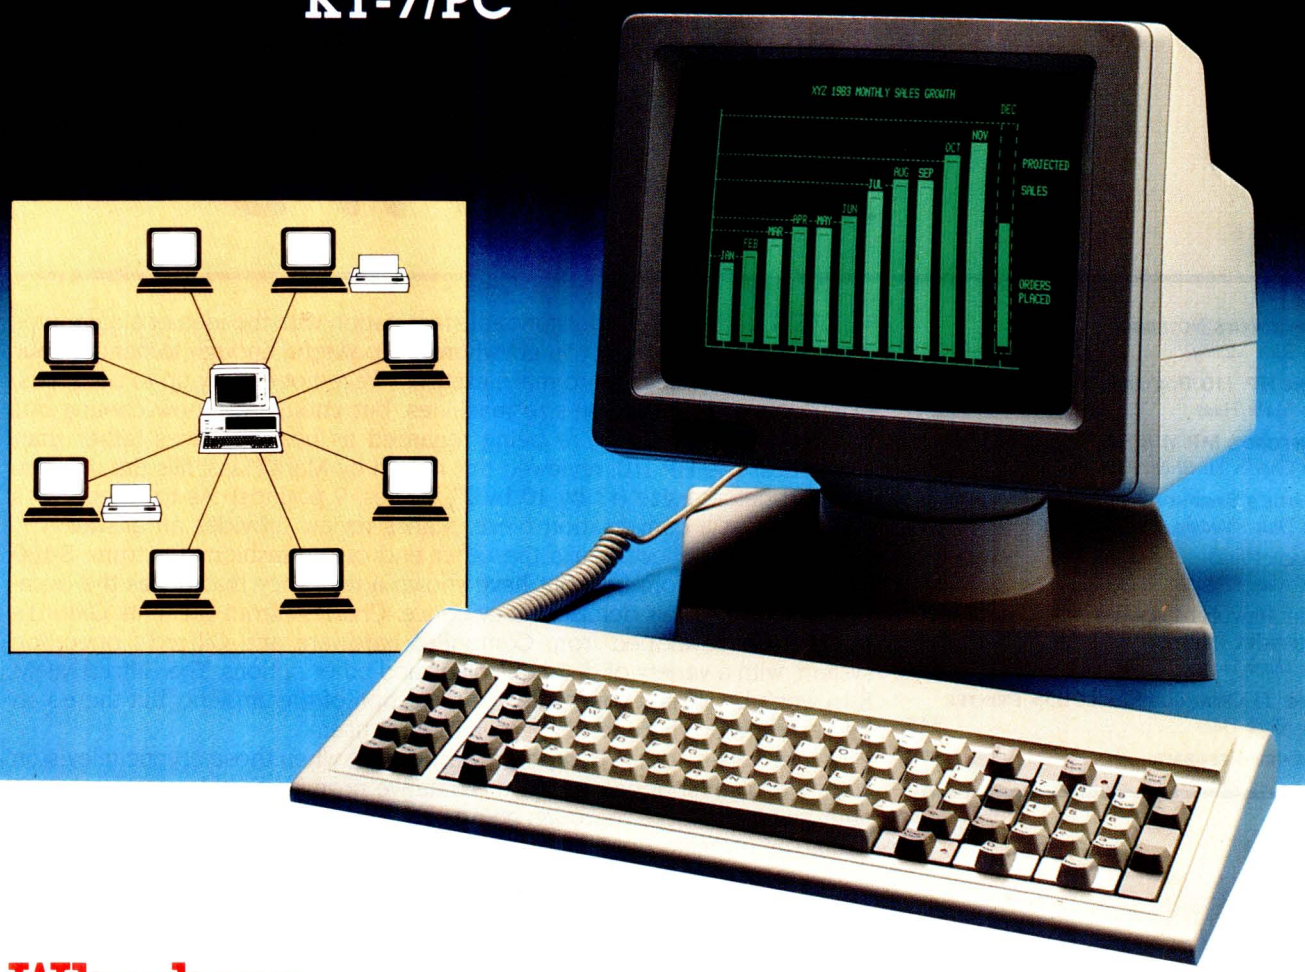

Why buy "ADDITIONAL EXPENSIVE PC'S" just to get additional users!

Kimtron is the only one that enables you to expand your IBM PC, XT, AT or the other PC compatibles to Multi-Tasking and Multi-User system at a fraction of the cost of additional PC's. Only Kimtron can display the screen exactly as your PC monochrome monitor, even for software like Lotus 1-2-3 or Word Star. Plus only Kimtron provides an IBM PC keyboard look-alike.

Operators will not only think and feel the KT-7/PC as if they're using IBM PC, but the KT-7/PC provides many more useful features such as tilt, swivel and height adjustment of monitor, optional amber screen, a dedicated serial printer port for each user at no extra cost, and optional 14 inch screen.

In addition, the KT-7/PC is designed for flexibility so that it can also be used as an industry compatible ASCII terminal.

Kimtron, a 5-year technology leader - we're going places and want you to join the Kimtron family of satisfied users. For more information about our KT-7/PC and your other terminal needs, call the Kimtron Corporation.

(408) 727-1510

NOTE: IBM PC, XT, and AT, Lotus 1-2-3, and Word Star are trade marks of IBM Corporation, Lotus Development Corp., and MicroPro International Corp.

2225 - I Martin Avenue
Santa Clara, CA 95050
408-727-1510 TWX: 910-338-0237

Kimtron

Inquiry 22

R·E·V·I·E·W·E·R'S N·O·T·E·B·O·O·K

The PFS Series of software from Software Publishing (1901 Landings Dr., Mountain View, CA 94043) has been popular for quite some time. All the entries in this series (pfs:File, pfs:Report, pfs:Graph, and pfs:Write) are relatively inexpensive and easy to use. Though they are not extremely powerful, they represent one of the best software values on the market. IBM used them as the basis for their Assistant series of software.

The only gap in this series was the absence of a spreadsheet program, and now that gap has been filled by pfs:Plan. This spreadsheet program was designed with some minor deviations from the Visi–Multi–1-2-3 school of thought. The titles for each column and row are always present on the screen no matter where you are in the sheet. Formulas appear in the margin of each row or column. This is helpful, but writing formulas for individual cells can get pretty complex. Also, pfs:Plan recalculates at about half the speed of Multiplan on the IBM Personal Computer (PC). This program seems well suited to shorter, simpler spreadsheet models and seems to integrate well with pfs:File databases. It will not replace Multiplan as the current spreadsheet of record, but at a list price of $140, it seems to be a fairly good bargain, especially if you already have one of the other PFS packages.

I was really looking forward to the new Commodore Plus 4 from Commodore International (1200 Wilson Dr., West Chester, PA 19380). Computers from Commodore have tended to be somewhat erratic, but the best-selling Commodore 64 is, despite its flaws, one of the best bargains in the industry. And now that it is so popular, it has become the beneficiary of some pretty good software. I was hoping the Commodore people would allow the new Plus 4 to take advantage of this huge software base and would add built-in software that would be comparable to the excellent third-party software that is available.

Unfortunately, this is not the case. The $300 Plus 4 is only slightly compatible with the 64, and the software that is included with the machine is just a tiny bit better than bad. For example, the maximum length of a document in the word processor is 99 lines of 77 characters each. (Just the right length for a complaint letter to a computer manufacturer.) Another thing, in order to insert a character, you first have to insert a space and then write over the space with the character. The spreadsheet and database programs are similarly underpowered and hard to use. This machine should have been called, not the Plus 4, but the Minus 60. A Commodore 64 with Multiplan from HesWare (150 North Hill Dr., Brisbane, CA 94005), a word processor such as WriteNow! from Cardco Inc. (313 Mathewson, Wichita, KS 67214) or SkiWriter II from Prentice-Hall Home Software (POB 819, Englewood Cliffs, NJ 07632), and some public-domain database programs (from CompuServe) would cost less and would vastly outperform this machine. We'll cover this in more detail later.

Telecommunications seems to have become one of the more popular reasons for buying a microcomputer. Indeed, modems are outselling most other computer peripherals. The problem is that most of the databases accessible to personal computers haven't changed since the days when mainframes ruled the computer world. The emphasis on user friendliness, a prime component of any personal computer product, seems to have completely bypassed these large and potentially intriguing databases.

To help us out, the Business Computer Network (BCN) (POB 37, Technical Research Park, Riverton, WY 82501) has given us SuperScout, a combination database gateway and communications software package. When you sign on to SuperScout, you are automatically signed on to about 10 databases at the same time. The most important of these is CompuServe, but Dialog and NewsNet are also there. BCN handles all the initiation costs for these services and even provides you with a free communications software package. This software package presents you with a menu of all of the databases available, calls the selected database, and takes you through the log-on procedures. This software will also automatically update itself as more databases are added. BCN charges you 25 cents over the cost of each database access, with a $5.00 minimum charge each month.

One problem with SuperScout is that it is so automatic, you are not sure what it is doing. It seems to take over your computer and to start making mysterious phone calls without asking permission. As you watch your modem lights go on and off, you wonder who SuperScout is calling and what devious schemes it is planning with other computer systems. Another problem is that you do not get the original manuals for each database. You get BCN's version, which is adequate but not comprehensive. However, you do get a nice glossy monthly update from BCN explaining the changes in each database.

A well-mannered program should never use your phone without asking. SuperScout is certainly user friendly, but I wish it were more "user courteous."

—Rich Malloy, Product-Review Editor

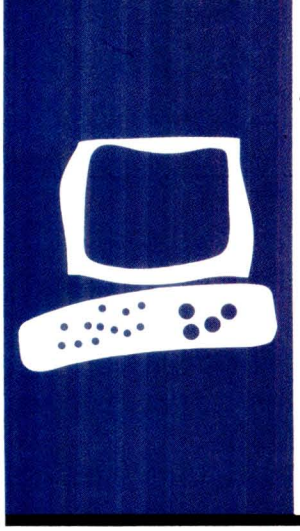

S·Y·S·T·E·M R·E·V·I·E·W

The HP 110 Portable Computer

A small package with powerful capabilities

BY MARK HAAS

In many ways more powerful than popular desktop computers, the HP 110 (see photo 1) combines an impressive array of hardware and software components in a compact, truly portable machine. Although its price might surprise you at first, a closer look reveals a computer with true desktop capability and performance well worth its cost for those who need the power.

The HP 110 measures 13 inches wide, 10 inches deep, and 2⅞ inches high when closed, and weighs in at nine pounds. It contains an 80C86 microprocessor, the CMOS (complementary metal-oxide semiconductor) version of the 8086, with a clock rate of 5.33 MHz—about 12 percent faster than that of an IBM or Compaq personal computer. Memory consists of 272K bytes of CMOS static RAM (random-access read/write memory) and 384K bytes of ROM (read-only memory). The ROM contains a full complement of software ranging from Lotus 1-2-3 to a set of preliminary diagnostic programs. A disk supplied with the HP 110 contains some MS-DOS utilities, the Lotus tutorial, and more extensive diagnostic programs. The HP 110 also contains a 300 bit-per-second (bps) modem, a clock/calendar, an RS-232C port, and a Hewlett-Packard Interface Loop (HPIL) port. The cover over the keyboard flips up to reveal an 80-column by 12- or 16-line liquid-crystal display (LCD).

The LCD tilts up and you can vary the display angle for optimum viewing. You can control the contrast from the keyboard. Comprising an array of 480 by 128 pixels, the LCD can display text as well as graphics. The LCD is actually a 16-line window into a larger display area. For example, when using the terminal-emulation software built into the HP 110, you can move the window through a 48-line display. You can move forward and backward a screen at a time by using the Prev and Next keys. Hewlett-Packard is about to release a version of Microsoft's GW-BASIC that will allow greater access to the display's graphics capabilities (it should be available as you read this review).

The keyboard (photo 2) has a nice feel to it, slightly stiffer than the Tandy Model 100's keyboard, but otherwise far superior. It has sculpted keytops and virtually no wobble in the keys. I think it will stand up to a lot of pounding. The 76 keys are arranged into six groups according to function: alphanumeric keys, display-control keys, edit keys, function keys, function-control keys, and terminal-control keys.

The computer is powered by a 6-volt, 2.5-ampere-hour sealed lead-acid battery good for up to 16 hours of operation on a single charge. The charge remaining in the battery is indicated in a window on the main PAM screen (described below). A recharger plugs into the back of the HP 110. It provides a 95 percent charge after being connected for 12 hours if the unit is off, or 20 hours if the unit is on. Should the battery charge fall below a predetermined level, a low-battery indicator will appear in the lower left corner of the screen and reappear every eight minutes as long as the battery is low. At this point you have enough juice for about one and a half to two hours. If you let the charge drop further, the HP 110 halts all normal operations. The clock and the memory are preserved, however, for one week to one month.

LIVING WITH PAM

Like the larger desktop HP 150, the HP 110 comes with an operating system named PAM (Personal Applications Manager). PAM is a software utility designed to insulate the user from the nasty operating system. When I reported my impressions of PAM as implemented on the HP 150 (November 1984 BYTE, page 262), I was less than enthusiastic about it. When I first turned the HP 110 on, there was the now-familiar PAM main screen (see photo 3) showing me what applications I could start and what functions I could perform, as well as providing me

Mark Haas (2600 Tenth St., Berkeley, CA 94710) is the technical director for Osborne/McGraw-Hill.

with some system statistics.

I grew to like PAM on the HP 110, though it took me some time to figure out why. I decided that PAM was successful on this machine because it was fast and less cumbersome to use than on the HP 150. Also, the system overhead for PAM is low. As it turns out, all these improvements can be explained by one factor: software in ROM.

Having software in ROM is like having a hard disk. Well, maybe a read-only hard disk. It is fast, nonvolatile (unerasable), and always there. You are not burdened with over 100K bytes of system files on every floppy disk. You don't have to search for the floppy that contains MS-DOS installed as an application if you want to venture into the operating system. You don't have to go through cumbersome installation procedures for every new application.

PAM on the HP 110 also has some nice new features. You can schedule alarms—either message alarms to remind you of meetings and birthdays or program alarms that tell the HP 110 to run a program or batch file. This is all controlled by a file you create called PAM.ALM. Each line of this file controls one alarm and contains the date and time for it. It also contains either a message to remind you of something or a command as you would enter it at the MS-DOS prompt.

PAM.ALM is easily updated using the built-in MemoMaker word processor. The only other requirement is that the alarm entries in the file be in chronological order. The file length is limited only by memory, and you can schedule alarms months (even years) in advance or as rapidly as one minute apart.

If you happen to be in another application when an alarm goes off, you will hear a warbling tone signaling you to retrieve your message. You must return to PAM to see the message or have another program execute. If the computer is off, the alarm will turn it on. Up to eight message alarms will be stored if you're not around to answer them or are too busy with another application, but only the first program alarm will be retained if it goes unanswered.

I used this feature quite a bit, mostly as a message alarm, and liked it very much. It reminded me of meetings and phone calls to make, and told me when to go home. It did seem to have one small bug, though. Sometimes after I returned to PAM from answering an alarm, the next application I tried to run would abort and I'd be returned to PAM. After that everything worked fine. It seemed to happen only when I stopped the alarm by pressing a key instead of letting the alarm run its course (about 10 to 15 seconds).

PAM has another special file it looks for called AUTOANSR.BAT. If the HP 110 is connected to the phone line and the phone rings, you will hear a low tone. If you are in PAM or the file manager and the AUTO-

(continued)



Photo 1: *The* HP 110 *Portable Computer.*

ANSR.BAT file exists, PAM will execute it. I did not test this feature.

Finally, installing new applications in PAM has been greatly simplified. It is necessary to add only two lines to a file you create called PAM:MNU. The first line is the label that will appear in the box in PAM's main screen. The second is the actual command line. You do not need to list every file involved or the total size of all the files as with PAM on the HP 150. If you are using external disk drives, you simply create a PAM.MNU file on each disk. It's a very small file, typically occupying less than 512 bytes.

One thing missing from this version of PAM is the Browse function of the file manager that lets you look at the contents of a file. I do miss that, but ROM space was at a premium according to Hewlett-Packard.

Other ROM Software

Besides PAM and MS-DOS, HP has included a complete set of what have become known as productivity tools: a spreadsheet, database, graphics program, word processor, and communications package.

Probably the single most unique feature of the HP 110 is Lotus 1-2-3 in ROM. This program alone will likely account for more HP 110 sales than any other single feature. This is a full version 1A of Lotus 1-2-3; nothing has been left out. Two utilities, Printgraph and Translate, and the tutorial are contained on an external floppy disk.

Lotus 1-2-3 loads with blinding speed. Less than three seconds after selecting this application from the PAM screen, you are ready to start. Worksheets load equally quickly, as the benchmark results indicate.

Recalculation is almost instantaneous, due in part to the efficiency of the 80C86 processor, which scores extremely well in the BASIC single-precision and Sieve benchmarks. Graphics on the LCD are perfectly presentable, although the pie charts would more aptly be called egg charts. It appears that the graphics routines for drawing circles still expect the normal CRT (cathode-ray tube) aspect ratio where it takes fewer dots to draw a line of any given length vertically than horizontally. On the HP 110's display, the aspect ratio is 1 to 1, and no compensation is necessary.

MemoMaker is HP's word processor. It is easy to use and works well, but it is somewhat limited in function. For instance, it does not have a Search and Replace function. It is a "what you see is what you get" word processor that HP describes in its manual as "for people who need to write although their primary occupation is not writing." I don't think that's entirely true; HP might be short-changing itself.

MemoMaker is perfectly adequate for preparing first drafts of manuscripts and performing light editing on them. For more extensive editing after the first draft is down, you would need a more powerful word processor. This could always be done on a desktop with a larger display or with the version of WordStar for the HP 110. I didn't spend too much time with MemoMaker, preferring to try out a prerelease version of WordStar instead. But I did find MemoMaker useful for creating system files such as PAM.ALM and installing new applications into PAM.

MemoMaker is described by HP as having WordStar-compatible files. However, later in the documentation HP admits to compatibility with WordStar document files "to a limited degree." In my opinion, the degree is very limited. The only features MemoMaker preserves are Control-B and Control-S used for boldface and underline, respectively. Soft carriage returns and hyphens are not preserved, and all other control codes are stripped. This won't pose much of a problem for someone preparing a manuscript but would be an obstacle to anyone preparing a finished-looking document.



Photo 2: *The keyboard of the* HP 110.

The Portable as Terminal

Because of its limited storage capacity, a portable computer needs some mechanism to move information into and out of itself. The HP 110 provides two avenues for moving data: the Hewlett-Packard Interface Loop (HPIL) described below and a terminal-emulation program called Terminal.

(continued)

AT A GLANCE

Name
HP 110, aka The Portable

Manufacturer
Hewlett-Packard Co.
3000 Hanover St.
Palo Alto, CA 94304
(408) 257-7000

Components
Size: 13 inches wide, 10 inches deep, 2⅞ inches high when closed (33 by 25 by 7.3 cm)
Weight: 9 pounds (4.1 kg)
Processor: 80C86

Memory
272K bytes of CMOS static RAM, 384K bytes ROM

Display
480- by 128-pixel liquid-crystal display, dot addressable, formatted as either 12 or 16 lines high and 80 characters wide

Keyboard
Full size, 76 keys with sculpted keytops

Storage
RAM can be partitioned to provide from 44K to 176K bytes of electronic disk, ROM treated as read-only electronic disk

Expansion
One RS-232C port, one HPIL port, built-in 300-bps direct-connect modem

Software
Personal Applications Manager (PAM), Lotus 1-2-3, MemoMaker, Terminal, MS-DOS 2.11, HP Link, Diagnostics

Price

HP 110 with case:	$2995
Optional HP 9114 disk drive:	$795
Optional Desktop Link:	$150



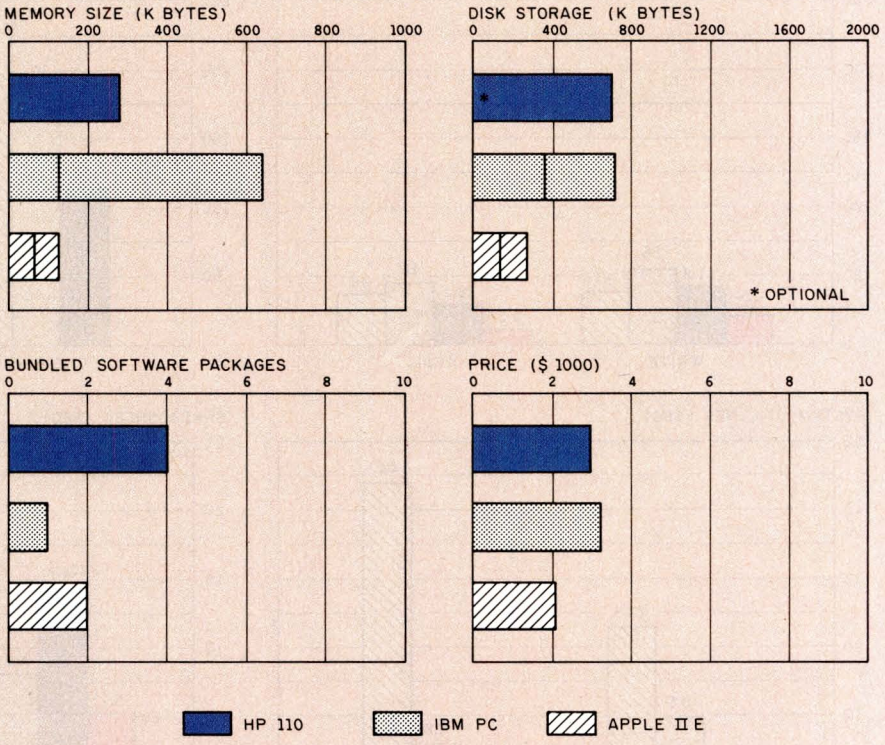

The Memory Size graph shows the standard and optional memory available for the computers under comparison. The Disk Storage graph shows the highest capacity for a single disk drive and the maximum capacity for each system (the HP 110 supports up to eight disk drives). The Bundled Software graph shows the number of software packages included with each system. The Price graph shows the list price of a typical configuration for each system: two floppy-disk drives, a monochrome monitor, graphics and color display capability, a printer port and a serial port, 256K bytes of memory (64K for 8-bit systems), the standard operating systems, and the standard BASIC interpreters. Note that the price of the HP 110 does not include a floppy-disk drive or a BASIC interpreter.

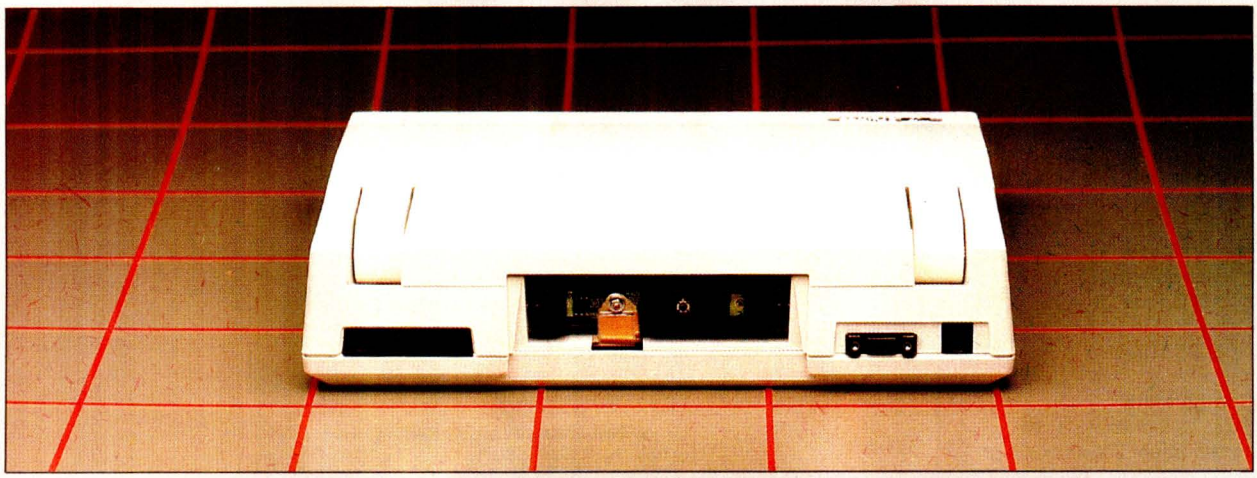

The rear panel of the HP 110: From left to right are the HPIL's in and out ports, the AC recharger connector, the battery compartment (usually covered), the serial port, and the modem phone jack.

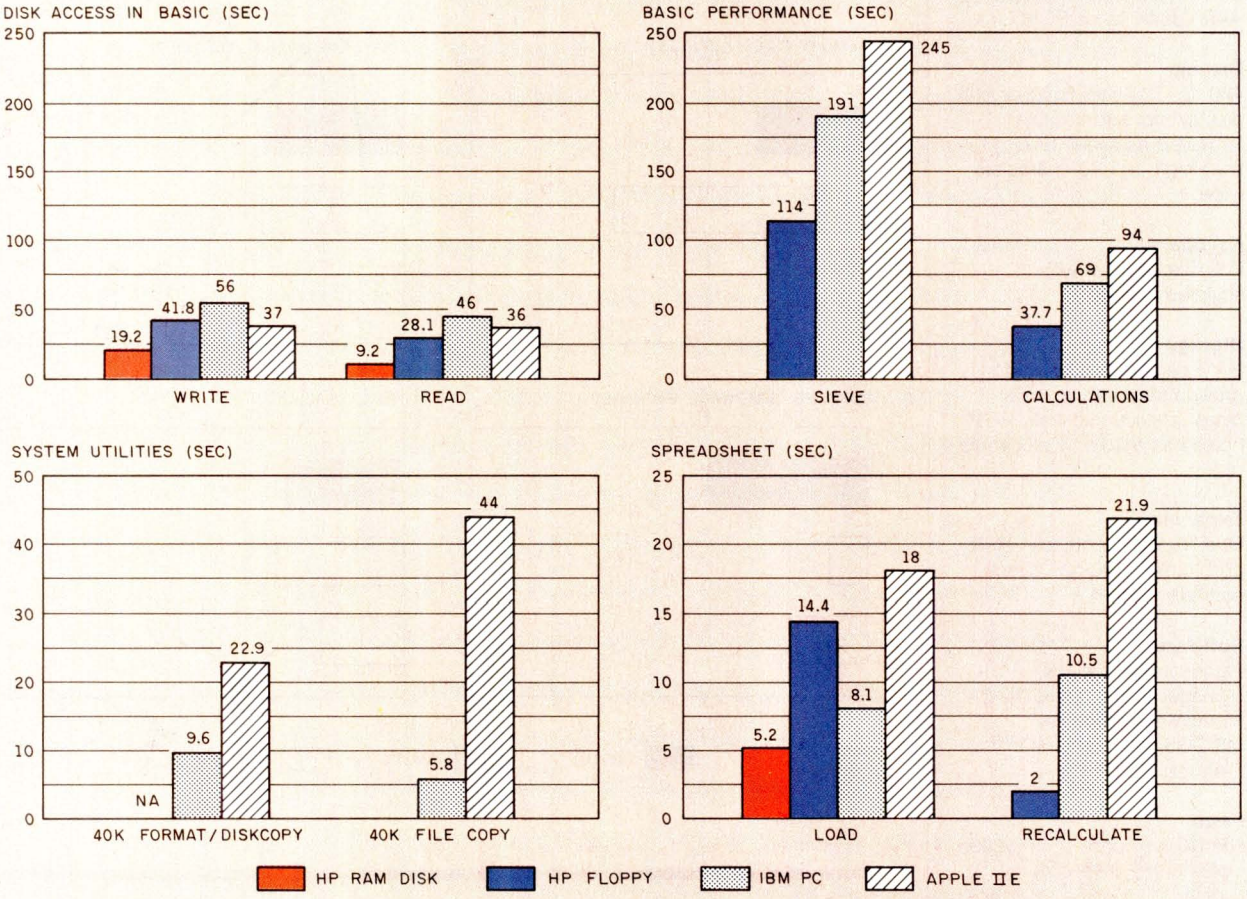

The Disk Access in BASIC graph shows how long it takes to write and read a 64K-byte sequential file to both the electronic RAM disk and the floppy-disk drive. The BASIC Performance graphs show how long it takes to run one iteration of the Sieve of Eratosthenes prime-number benchmark. The Calculations column shows how long it takes to do 10,000 multiplication and division operations using single-precision numbers. The System Utilities graph does not include columns for Format/Disk Copy because the HP 110 had only one floppy-disk drive. The File Copy columns show how long it takes to transfer a 40K-byte file using the system utilities. The Spreadsheet graph shows how long the computers take to load and recalculate a 25-by 25-cell spreadsheet where each cell equals 1.001 times the cell to its left. The HP 110 used Lotus 1-2-3 both in ROM and on a floppy disk. The IBM PC and the Apple IIe used Multiplan.

Terminal is a nice little communications package. It features many of the capabilities you'd expect to find only on desktop computers. Terminal can auto-dial and auto-answer the phone, automatically log you onto the host system, and transfer files using several error-checking protocols including Modem7. It is also easily configurable.

The basic operation of Terminal revolves around the use of three screens: the terminal-, upload-, and download-configuration screens. The screens determine how Terminal will function. They are accessed by pressing a function key for each screen from the main menu. You can establish many configuration screens and swap them in and out as necessary, depending on your particular requirements. The terminal- and download-configuration screens are shown in photo 4. The upload screen is identical to the download screen except for the absence of the overwrite field.

The terminal-configuration screen sets up the communications parameters. You enter the data rate, number of data bits, and parity, as well as the communications channel you wish to use (modem, RS-232C, or HPIL). The built-in modem supports only data rates of 300 bps and below, but the RS-232C and HPIL ports can handle up to 19,200 bps. Even the end-of-line character can be defined as either CR, LF, or both. Another field is provided to label the configuration for future identification. If appropriate, you can also enter a phone number to dial, including commands for access pauses, answer or originate mode, and tone or pulse dialing, and an automatic log-on string.

Automatic log-on is accomplished by using a small programming language to create a log-on string. An E transmits the currently defined end-of-line character, a W followed by a number indicates a pause, a string in quotation marks is transmitted literally, and a string in curly brackets specifies a prompt to wait for from the host. If the log-on string is too long to fit on the single-line field of the configuration screen, it can be placed

(continued)

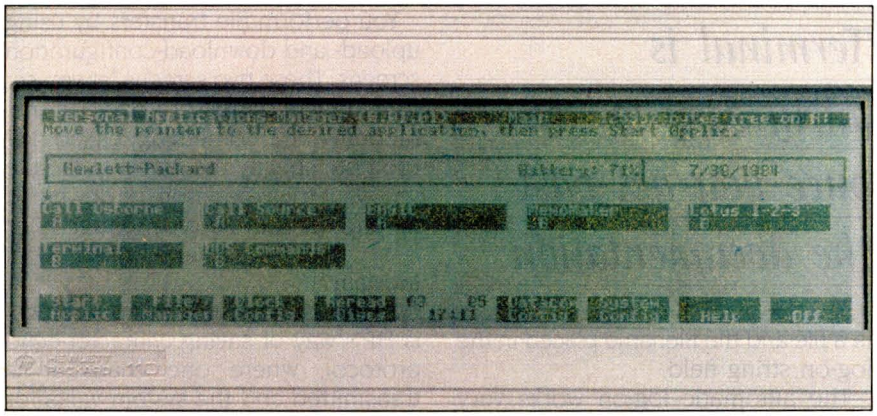

Photo 3: *The main PAM screen lets you access the installed applications. The first three boxes show applications I installed, two of which are turnkey log-ons to remote computer systems. The screen also provides information on the remaining battery charge and the number of bytes free on the internal electronic disk. The bottom row shows other options such as the system-configuration screen, setting the clock, and the file manager.*

(4a)

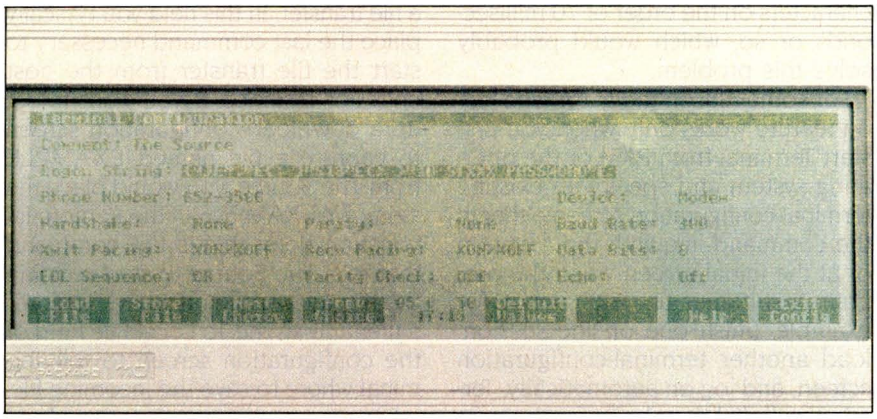

(4b)

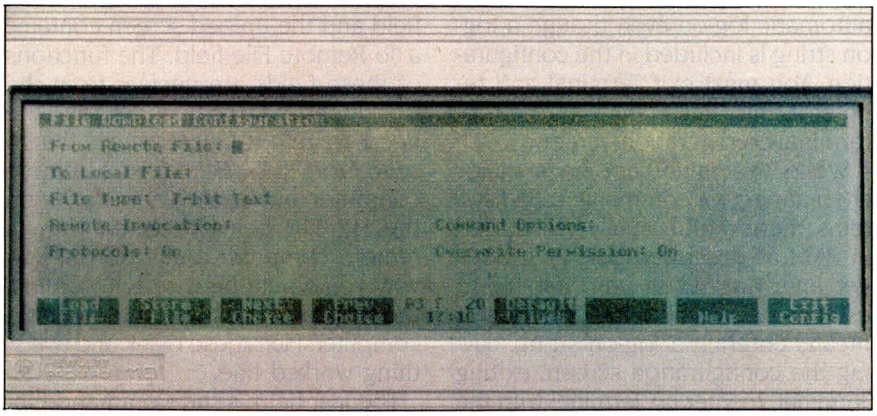

Photo 4: *Configuration screens are the core to the built-in terminal-emulation software. The terminal-configuration screen (a) sets up the communications parameters, and the download-configuration screen (b) establishes how file transfers will take place. A similar upload screen does transfers in the opposite direction.*

Terminal is fairly easy to use once you get past the documentation.

in a file and the filename placed in the log-on string field.

The automatic log-on works very well with The Source. But with some slower systems (like the hundreds of individual bulletin boards around the country), you might encounter difficulties due mainly to the speed at which data is sent from the HP 110. The automatic log-on system has no provision for small delays between characters on the order of 70 milliseconds or so, which would probably solve this problem.

For some reason the automatic log-on feature works only when you first start Terminal from PAM or the operating system and specify an existing terminal-configuration screen either in the command line with the /t option or at the initial screen when the program first comes up. You cannot, for example, finish one on-line session, load another terminal-configuration screen, and log on automatically. Terminal will dial the phone for the next session but will not proceed with an automatic log-on even though a log-on string is included in the configuration. You must exit Terminal and reenter it, this time specifying the new terminal-configuration screen.

While this might not be a major shortcoming for commonly called systems (these would usually be installed in PAM as described below), it does get annoying when you first try to establish a workable log-on string. It means entering a log-on string, saving the configuration screen, exiting Terminal, reentering Terminal with the configuration screen specified, trying the automatic log-on, revising the log-on string if necessary, and repeating the whole procedure over and over until the log-on string works.

You perform file transfers by using upload- and download-configuration screens. These two screens let you set the transmission protocol (none, Modem7, or something called HP Prompt), specify the name of the file you want to upload from or download to, and set the file type, either 7- or 8-bit text or binary (used with Modem7).

It turns out that HP Prompt protocol is HP's way of saying character-echo protocol, where one character is transmitted and the system waits for the character to echo back before sending the next character. This is useful when you transmit to slow bulletin-board systems.

Next is something called a Remote Invocation field. The string you place in this field will be automatically transmitted to the host as soon as you start a file transfer. In this field you typically place the last command necessary to start the file transfer from the host end. For instance, if you want to set up a download-configuration screen to capture a file named EXAMPLE from The Source, you would place the string TY EXAMPLE in the Remote Invocation field; this is the command that tells The Source to start sending the file. You would also have to enter a filename in the To Local File field of the configuration screen to tell Terminal where to save the incoming file.

For some reason the download screen contains a From Remote File field and the upload screen contains a To Remote File field. The functions of these fields are unclear from the documentation. I can understand the need to tell Terminal which file to send from the HP 110 to a remote computer and what to name a file on the HP 110 being received from a remote computer, but I don't know why you would have to tell Terminal the names of the files on the remote computer. I left these blank and everything worked fine.

The last field is the Command Options field. This appears to be an extension of the Remote Invocation field, as the manual says it is transmitted after the Remote Invocation field. This, too, is not very clear. Does Terminal send an end-of-line sequence after each field? I left this blank also.

After you enter all the parameters, you can copy the configuration screen to disk by using the electronic A: drive of the HP 110. When you exit the configuration screen setup, it becomes "active," and the parameters it contains determine how Terminal will act. By combining terminal-, upload-, and download-configuration screens, you can customize Terminal for each system you call. Then from MS-DOS you enter the command line

```
TERMINAL /T TSOURCE.CFG /D
DSOURCE.CFG /U USOURCE.CFG
```

This line loads Terminal and the three configuration files you designed for (in this case) The Source. But you have an even easier way. You can install commonly used command lines directly into PAM and label them with the name of the system they call. Then from the PAM screen you merely have to select the label you created from the menu and press one key. The rest is automatic.

Terminal can also be set up for auto-answer. According to the user's manual, you can configure the HP 110 to let a remote terminal (or computer) control it. When the phone rings and the HP 110 is in PAM, the computer looks for a file named AUTOANSR.BAT. If it finds it, the contents of that file are executed as with any other batch file. By just calling your computer, you can have it execute a predetermined set of commands. This opens up many possibilities for remote data logging, security, and other functions.

Terminal is a fairly easy program to use once you get past the documentation. I found many of the explanations confusing, and in some cases rather incomplete. The explanations of uploading and downloading were particularly sparse, especially in their descriptions of how the upload- and download-configuration screens affect these procedures. It was only through experimentation that I finally figured them out.

(continued)

Inquiry 352 ⟶

TRANSTECTOR Has A Better Way To Eliminate Computer Malfunctions.



Computer foul-ups are enough to bring out the beast in even the most patient of individuals. But when random logic errors, memory loss, software damage or component failures have driven you to the brink, don't resort to wielding a sledgehammer. Fight back with TRANSTECTOR SYSTEMS.

TRANSTECTOR is the world's leading manufacturer of transient overvoltage protection systems for sensitive electronics. In fact, many FORTUNE 500 companies, such as NCR, General Electric Medical Systems and Johnson Controls, have chosen TRANSTECTOR to safeguard equipment they sell.

Now, that same famous technology is available to you. Ask your dealer for details on how TRANSTECTOR protectors can save you money--not to mention your mental health.

TRANSTECTOR®

10701 Airport Dr.
Hayden Lake, ID 83835
(208) 772-8515

For the name of the TRANSTECTOR SYSTEMS authorized dealer nearest you, call toll-free:

800-635-2537

FREE POSTER!

If you can empathize with the poor soul in this photo, you'll want an attractive, color poster (a $7.50 value) to remind you that There Is a Better Way.

Get your very own poster FREE with the purchase of any TRANSTECTOR protector from your local authorized TRANSTECTOR dealer.

1985 Transtector Systems • TRANSTECTOR is a registered trademark of Transtector Systems, Inc.

In spite of the few complaints mentioned above, I found Terminal to be more than adequate. The inclusion of Modem7 protocol struck me as so unusual from a company like Hewlett-Packard that I have to think they are serious about personal computers.

Disks: Electronic and Otherwise

The HP 110's memory has a unique structure. The ROM portion of memory, fixed at 384K bytes, is treated like a disk drive by the operating system. Designated the B: drive, the ROM contains nearly all the software you are likely to need, including Lotus 1-2-3, Terminal, MemoMaker, PAM, and MS-DOS. Anything else you care to add would reside in the RAM portion of memory.

The CMOS RAM in the HP 110 is partitioned into two parts. One section is reserved for program and data-file storage and is referred to as the A: drive. The other section is considered main memory, but the partition is movable. You can designate anywhere from 96K to 228K bytes of the total 272K bytes of RAM to be main memory in 4K-byte chunks. The balance, 176K to 44K bytes, is reserved for the electronic A: drive. The partition can be moved at any time, and the system will protect any files that exist on the A: drive by not letting you move the partition any further in that direction.

When you select one of the programs stored on the B: drive (ROM), such as Lotus 1-2-3 or Terminal, you do not lose any of the main RAM memory to holding the program itself. Thus, when using a program like Lotus 1-2-3, you have all the available main memory for your worksheet. Programs and data stored on the A: drive are loaded into main memory, just like from any other type of disk drive.

In addition to the two electronic disk drives in the HP 110, you can add up to eight external disk drives using the HPIL. (For a brief description of the HPIL, see "An Introduction to HPIL" on page 300.) I was able to test the HP 9114 disk drive, shown in photo 5, which is a double-sided, 3½-inch Sony drive that can hold 684K bytes of data. If you consider the heavy system-file overhead of the HP 150, these disks provide the HP 110 with nearly four times the storage capacity of the HP 150's disks. The HP 9114 can read from and write to disks formatted on the HP 150. Access times for data on this external drive are not bad at all, especially considering the constraints of the HPIL. They compare very favorably with those of the IBM PC.



Photo 5: *The HP 9114 portable disk drive contains a 3½-inch, double-sided Sony disk drive capable of storing over 680K bytes of data. Also included is a lead-acid battery and interface electronics.*

The HP 9114 is also battery powered, which accounts for the size of the unit: 11½ inches wide, 8 inches deep, and 3 inches high. That's about the size of the 5¼-inch disk drive for the Commodore 64 computer. When the battery starts to wear down, a light flashes on the front of the unit, and if the unit isn't recharged, it starts getting flaky. The disk drive will not start working again immediately when the charger is plugged in. You must wait for the battery to be sufficiently recharged.

The Portable-Desktop Link

Besides the communications link offered by terminal emulation, HP has developed a more direct means of connecting the HP 110 to another computer. Called the Portable-Desktop Link (or just the Link), this method turns your desktop computer, either an IBM PC, PC-compatible, or HP 150, into a peripheral of the HP 110. I tested this link, also called the extended I/O (input/output) accessory, with the HP 150.

The Link is a combination software/hardware package retailing for $150. An interface card plugs into the desktop and connects the computer as a peripheral device on the HPIL with the HP 110 as the controller. The software supports the HPIL capabilities and determines what function the desktop will perform. When connected to the loop, the desktop becomes three peripherals in one: a mass-storage device, a printer, and a display. However, you can use only one function at a time, and this is controlled by a single keystroke on the desktop's keyboard.

To use the Link, you install the interface card in a peripheral slot in the desktop like any other card. Next, the two-wire HPIL cable is used to connect all the devices in the loop together. Where in the loop the desktop is connected is determined by what other devices exist in the loop. Then you run the software that comes with the Link on the desktop computer, which is now a peripheral of the HP 110. Finally, you must reconfigure

(continued)

The right network isn't a matter of choice. It's a matter of fact.



Fact: You can't buy smarter than an OMNINET™ Network.

Whether you have 2 microcomputers or 200, you bought them to handle information. If each micro has to handle it separately, both your equipment and your people are working inefficiently.

Because they could network with OMNINET. Sharing information—as well as the printing and data storage equipment that really puts information to work.

Add CORVUS' SNA Gateway, and you can link your entire network directly to your mainframe.

That's why an OMNINET Network uses simple, telephone-type line. Even relocating the system to a whole new building is just a move. Instead of a construction project.

Fact: OMNINET Networks offer unmatched compatibility.

From Apples to Zeniths, OMNINET handles more varieties of computers than any other network.

So keep the DEC's in Data Processing and the PC's in Purchasing. OMNINET will keep them all on speaking terms.

The price? At under $500 per hookup, OMNINET is the most cost-effective network you can install. Or expand.

Fact: This network was designed for microcomputers.

Micros get moved. Businesses expand.

Your network should be able to grow and change just as fast as your business does.

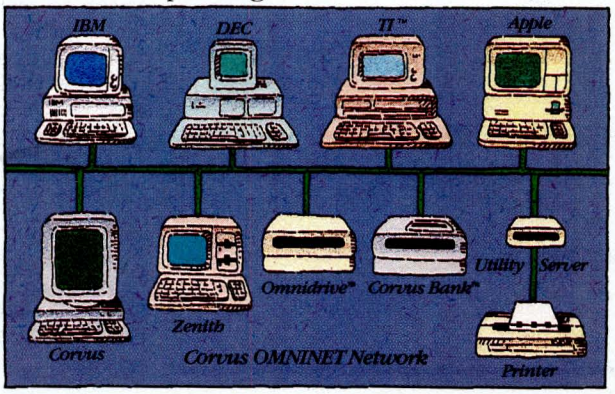

Fact: The experts network with OMNINET.

Over 30 of the major computer companies have licensed OMNINET for networking their micros. So you don't have to worry about support tomorrow for the system you pick today.

And OMNINET already has the most software options around—over 500 programs to choose from, according to your people's needs. Not their network's limitations.

Fact: The facts have made us #1.

CORVUS pioneered local area networking for microcomputers, and we've never stopped working on ways to improve it.



Just give us a ring at **800-4-CORVUS** to find out more.

Because while calling ourselves the best is a matter of opinion, telling you that 3 out of every 5 locally networked micros work on a CORVUS network is something else.*

It's a matter of fact.

CORVUS
The Networking Company.

*59% of all locally-networked micros operate in a CORVUS network, according to *InfoCorp.* CORVUS, THE NETWORKING COMPANY, OMNINET, OMNIDRIVE and CORVUS BANK are trademarks of CORVUS SYSTEMS, INC. IBM PC is a trademark of International Business Machines. APPLE is a trademark of APPLE COMPUTER INC. DEC is a trademark of DIGITAL EQUIPMENT CORPORATION. Zenith is a trademark of Zenith Corporation.

An Introduction to HPIL

HPIL is an interface system defining the way stand-alone, desktop, and hand-held devices can work together. The characteristics of HPIL are formally defined in the HPIL reference specification. This specification defines both a physical link and a message protocol between a number of devices and controllers.

HPIL systems can comprise three types of devices: talkers, listeners, and controllers. Talkers send data over the interface loop. Listeners receive data from a talker or commands from a controller. Devices can be both talker and listener, such as a printer that receives data to print (listener) and sends out status information (talker). The role of talker or listener is assigned to a device by a controller.

Controllers are in charge of all loop operations. They are typically responsible for assigning addresses to devices, assigning device roles (talker, listener, or controller), servicing device requests, and initiating the transfer of data from talker to listener(s). Only one controller can take control of the loop at any one time, although several can be physically connected to it and pass control from one to the other.

The HPIL specification allows for a maximum distance of 10 meters between devices using simple two-wire cable. Distances of up to 100 meters can be achieved with the use of shielded twisted-pair cable.

HPIL supports a maximum of 31 devices on a single loop using the standard method of addressing. An extended form of addressing supports up to 960 devices. Theoretically, data can be transferred over the loop at rates up to 20,000 bytes per second, but with current devices rates of only 2000 bytes per second are much more common.

Hewlett-Packard has defined a message structure: a common set of messages that all HPIL devices must understand. These messages define the way a device must operate to communicate over the loop. Each message comprises 11 bits: 3 bits of control information followed by 8 bits of data or command. This 11-bit message travels over the loop from controller to device or from talker to listener, with the most significant bit of control information arriving first. Since messages on the loop can arrive at any time, the first bit to arrive at a device acts as a start bit. It also signals whether the message contains data or a command.

HPIL messages are divided into four basic classes or major types: Command class, Data or End class, Ready class, and Identify class. These classes are based upon the coding of the message's 3 control bits.

The Command class includes all messages sent from the active controller to other devices on the loop. These messages contain commands that control either interface or device functions. Instructions in the Command class can pertain to a single device or to all devices residing on the loop.

A device receiving a Command class message immediately retransmits the message to the next device on the loop and saves its own copy of the command before beginning execution. The active controller must follow the Command class message with a Ready For Command message to verify that the device has completed command execution.

Messages in the Data or End class include all data sent from an active talker to an active listener. The last byte of data in a record is called the end byte.

Ready class messages control loop operation. Three subgroups of messages are within the Ready class: the Ready For Command message, the group of messages known as the Addressed Ready group, and the group of Ready frames called the Auto Address group. The Ready For Command message lets the active controller determine when devices have completed execution of a prior command. Addressed Ready commands normally are used to control sending data from talker to listener. Auto Address messages simply let a controller bring up or configure a loop without operator intervention. In this mode, devices are effectively assigned addresses through the use of messages in the Auto Address group.

Identify class messages are used by the controller to determine whether a device on the loop needs servicing. The process of identifying which device needs attention is called polling. The HPIL command structure allows for two methods of polling: serial and parallel.

See table A for a list of HPIL peripherals that work with the HP 110.

Table A: HPIL *peripherals that work with the* HP 110. *Other* HPIL *peripherals, such as interfaces to scientific instruments, require special device-driver software that is not included with the computer.*

Mass Storage
HP 9114A double-sided microfloppy drive
HP 82161A digital microcassette drive

Printers
HP 2225B (ThinkJet) ink-jet printer
HP 82905B 80-column impact dot-matrix printer
HP 2671A 80-column thermal printer
HP 2671G 80-column thermal graphics printer

Plotters
HP 7470A two-pen graphics plotter

Displays
HP 82163B 32-column video interface
Mountain Computer MC00701A 80-column video interface

Interfacing/Communications
HP 82168A acoustic coupler modem
HP 82973A HPIL card for the IBM PC XT
HP 45643A extended I/O accessory for the HP 150
HP 82164A HPIL/RS-232C converter
HP 82169A HPIL/HPIB converter

[*Adapted from* The HP-IL System: An Introductory Guide to the Hewlett-Packard Interface Loop, *by Gerry Kane, Steve Harper, and David Ushijima. Copyright* 1982 *by* McGraw-Hill Inc. *Used by permission.*]

the HP 110 to tell it that additional disk drives are available on the loop, and perhaps a printer, too.

Once this is done, the desktop computer's disk drives become the HP 110's. That is, the A: and B: drives of your IBM PC or HP 150 become the C: and D: drives of the HP 110. If an HP 9114 disk drive is already installed in the loop as the C: drive, the desktop's A: and B: drives become the HP 110's D: and E: drives. If your desktop has a hard disk, it also becomes part of the HP 110. If a printer is attached to your desktop, you can print from that. Finally, you can print to the desktop's display. The desktop's display, however, does not substitute for the HP 110's.

Should you happen to want to exchange data with another HP 110, all you need is already built into the HP 110. A version of the Link software is supplied in the HP 110's ROM, though not listed on the PAM menu, and the HPIL port is also included. Just connect up the cables and you're set.

The Link is a cost-effective addition to the HP 110 for those already owning a complete desktop system. It precludes buying a separate printer for the HP 110. It gives the HP 110 access to your desktop's mass-storage system, making the exchange of data rather straightforward; you merely copy the files from one disk drive to another using the Copy command.

Benchmarks

After experiencing the performance of the HP 150, I didn't expect any remarkable times from the HP 110. However, the HP 110 proved to be a formidable machine. The BASIC benchmarks shown in the "At a Glance" box were performed with the same BASIC-86 used to perform them on the HP 150. Since the HP 9114 disk drive can read the HP 150 disks, and since BASIC-86 is a generic MS-DOS BASIC, I had no problems in transferring it over to the HP 110.

Where applicable, I performed benchmarks using both the electronic A: drive and the HP 9114, which was the C: drive, for comparison. In most cases, test results for the electronic disk were 55 to 65 percent faster than the same tests run using the floppy disk. Another point not shown in the benchmarks is the consistency of times achieved using the electronic disk. While floppy-disk times varied from trial to trial by as much as 25 percent, times for the electronic disk rarely varied more than a tenth of a second.

I did not perform one of the two system utility benchmarks. Disk Copy requires that both disks be the same format, as it is a track-by-track copy program. Unfortunately, I have only one external disk drive, and it is formatted differently from the internal electronic disk drive. It appears that Disk Copy can only be used between two external disk drives. If this is the case, I don't understand why Disk Copy is included in the ROM and the Browse function of the file manager is left out.

The file-copy benchmark was performed using the Copy command to move the standard 40K-byte text file from the electronic A: drive to the external floppy disk.

Just to get an idea of how the HP 110 can handle word-processing tasks, I obtained a prerelease copy of WordStar for this machine and compared it to results BYTE has obtained with the IBM PC running WordStar version 3.3 and BYTE's standard 4000-word document. Of course, the electronic disk (A:) allowed very fast document loads and saves (6.1 and 11.1 seconds) compared to the IBM PC (9.9 and 24.9 seconds), but even the HP's floppy disk (C:) scored respectable times (7.8 and 26.1 seconds). Likewise, the search test results for the RAM drive and floppy were comparable with the IBM PC (8.5 and 19.1 seconds versus 10.5 seconds). The only major difference was in the scroll test (195 seconds versus 41.2 seconds for the IBM), due to the slow speed of the LCD. These times were obtained with a prerelease version; the final version might be a bit faster or slower.

I had one problem with WordStar that probably will not change from version to version, and that has to do with the size of the RAM drive. When all of WordStar is loaded onto the electronic disk, only about 64K bytes is left for documents, not counting any memory used by other programs. Also, WordStar usually makes three copies of a document: the original, a backup copy, and a temporary copy WordStar is working on. This can quickly eat up the memory in the RAM drive. You might have to delete all the backup files to save space.

The HP 110 performed better than the IBM PC in most benchmarks.

Conclusions

The HP 110 performed better than the IBM PC in most of the benchmarks, especially when taking advantage of the electronic A: drive. The HPIL, the RS-232C port, the built-in modem, and the optional Portable-Desktop Link provide a flexible system that can be easily expanded and allows easy exchange of data.

Built-in software provides most of the functions most people will need. The terminal-emulation software supports Modem7 protocol, MemoMaker provides adequate word processing, and Lotus 1-2-3 provides powerful business tools. Unlike its predecessor on the HP 150, PAM works. This implementation of the MS-DOS shell actually makes using the machine easier.

All this is contained in a portable package you can use while traveling, not just when you get to your destination. The optional HP 9114 disk drive and the ThinkJet printer are battery powered for portable use, too.

The ads for the HP 110 depicted it as the sports car of computers, driving circles around the lumbering desktops (too bad one of them wasn't the HP 150). They implied that the HP 110 is both highly portable and more powerful than the desktops. Perhaps they're right. ■

Get yourself a

This little critter comes with specially-designed software that flies through the maze of keystrokes on the most popular business programs faster than you can say "cheese."

Microsoft® Mouse puts the power to run Multiplan,® Lotus 1-2-3,™ VisiCalc® and WordStar® in the palm of your hand. Click the left button on the mouse, a custom menu appears. In English, not hieroglyphics. Click the right button and execute your command: move text or data, edit, format, print. All at blinding speed without touching the keyboard.

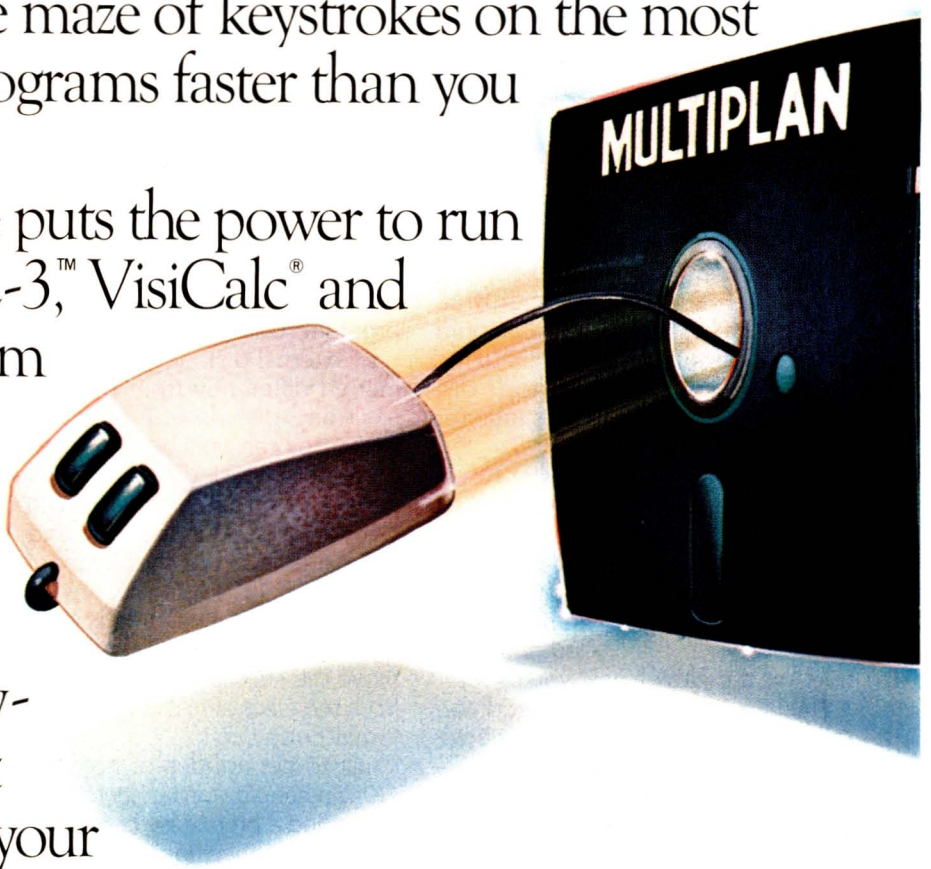

It also lets you create your own menus for editing and formatting existing application programs. So people can learn programs quicker and do more productive work as they learn.

The mightiest mouse.

Microsoft Mouse runs circles around other mice. It is the high performance mouse for the IBM® PC and PC XT. From the company known for high

trained mouse.

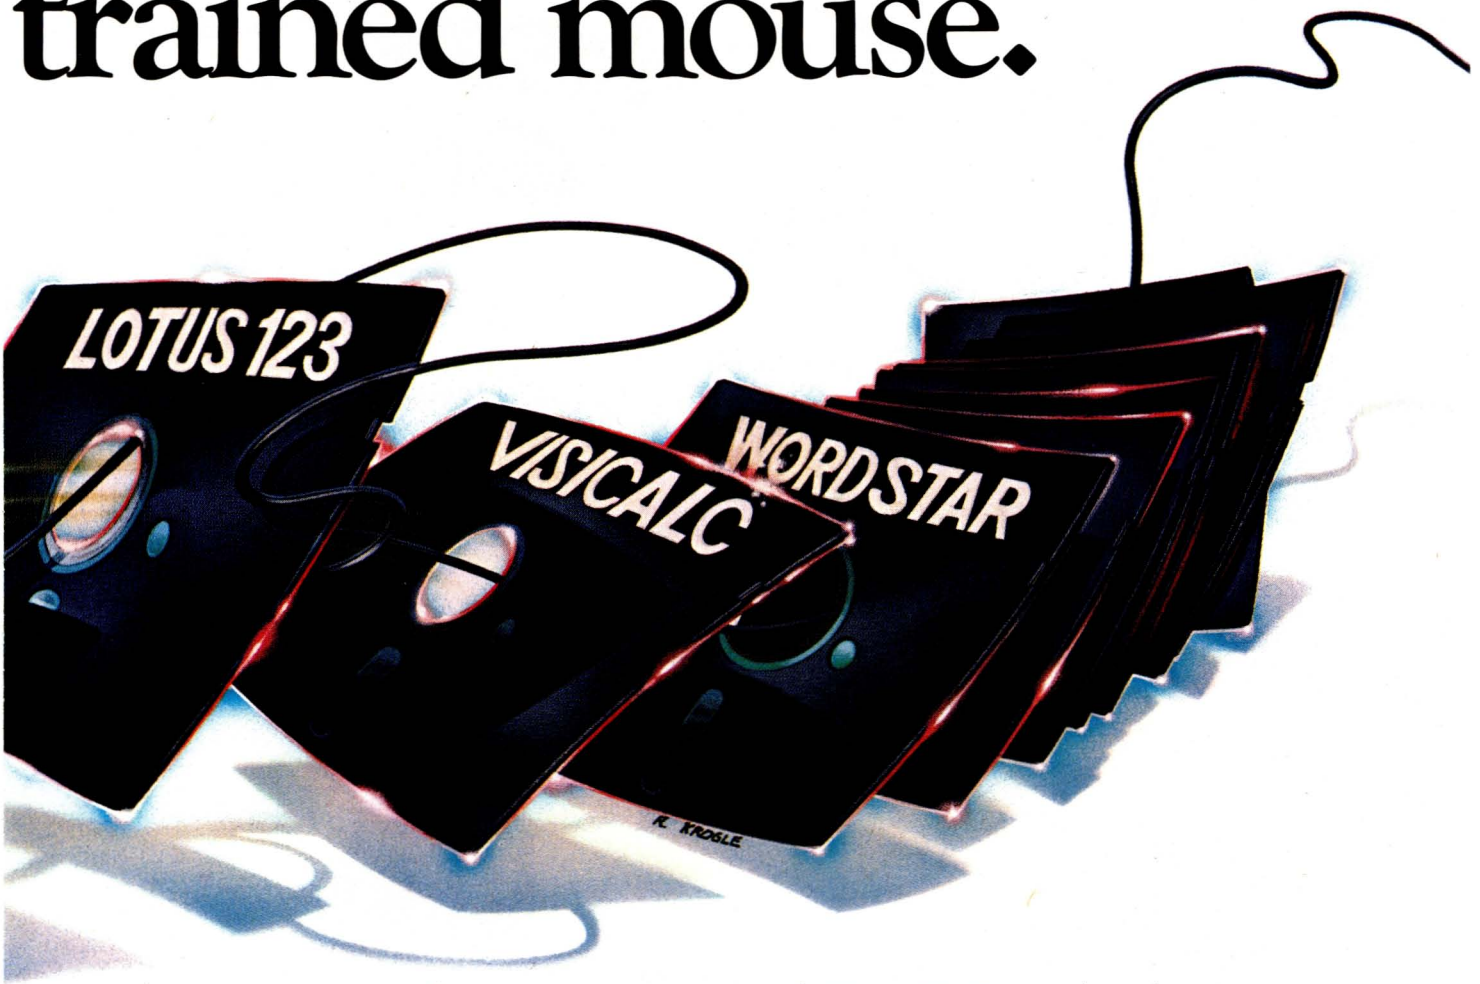

performance software. Microsoft BASIC is the language spoken by nine out of ten microcomputers worldwide.

MICROSOFT®
The High Performance Software

Our MS™-DOS operating system tells your IBM PC how to think.

So don't monkey around with any other mouse. Call 800-426-9400 (in Washington State call 206-828-8088) for the name of your nearest Microsoft dealer. Then go with Microsoft Mouse. The mouse that soars.

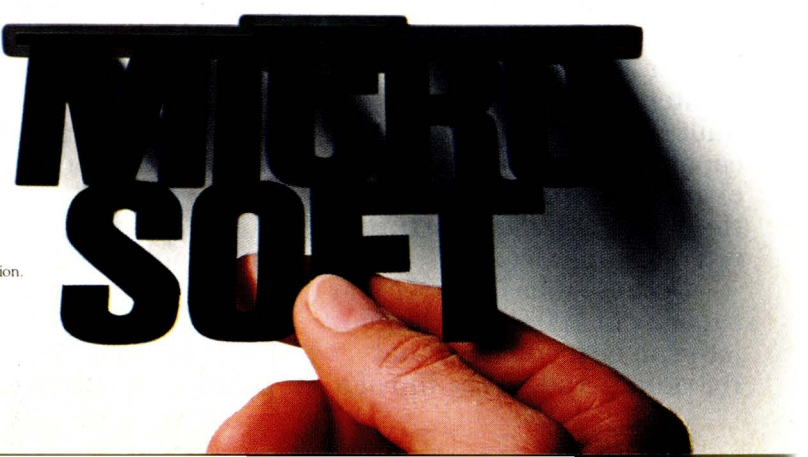

Microsoft and Multiplan are registered trademarks and MS is a trademark of Microsoft Corporation.
Lotus 1-2-3 is a trademark of Lotus Development Corporation. VisiCalc
is a registered trademark of VisiCorp. WordStar is a registered trademark of MicroPro.
IBM is a registered trademark of International Business Machines Corporation.

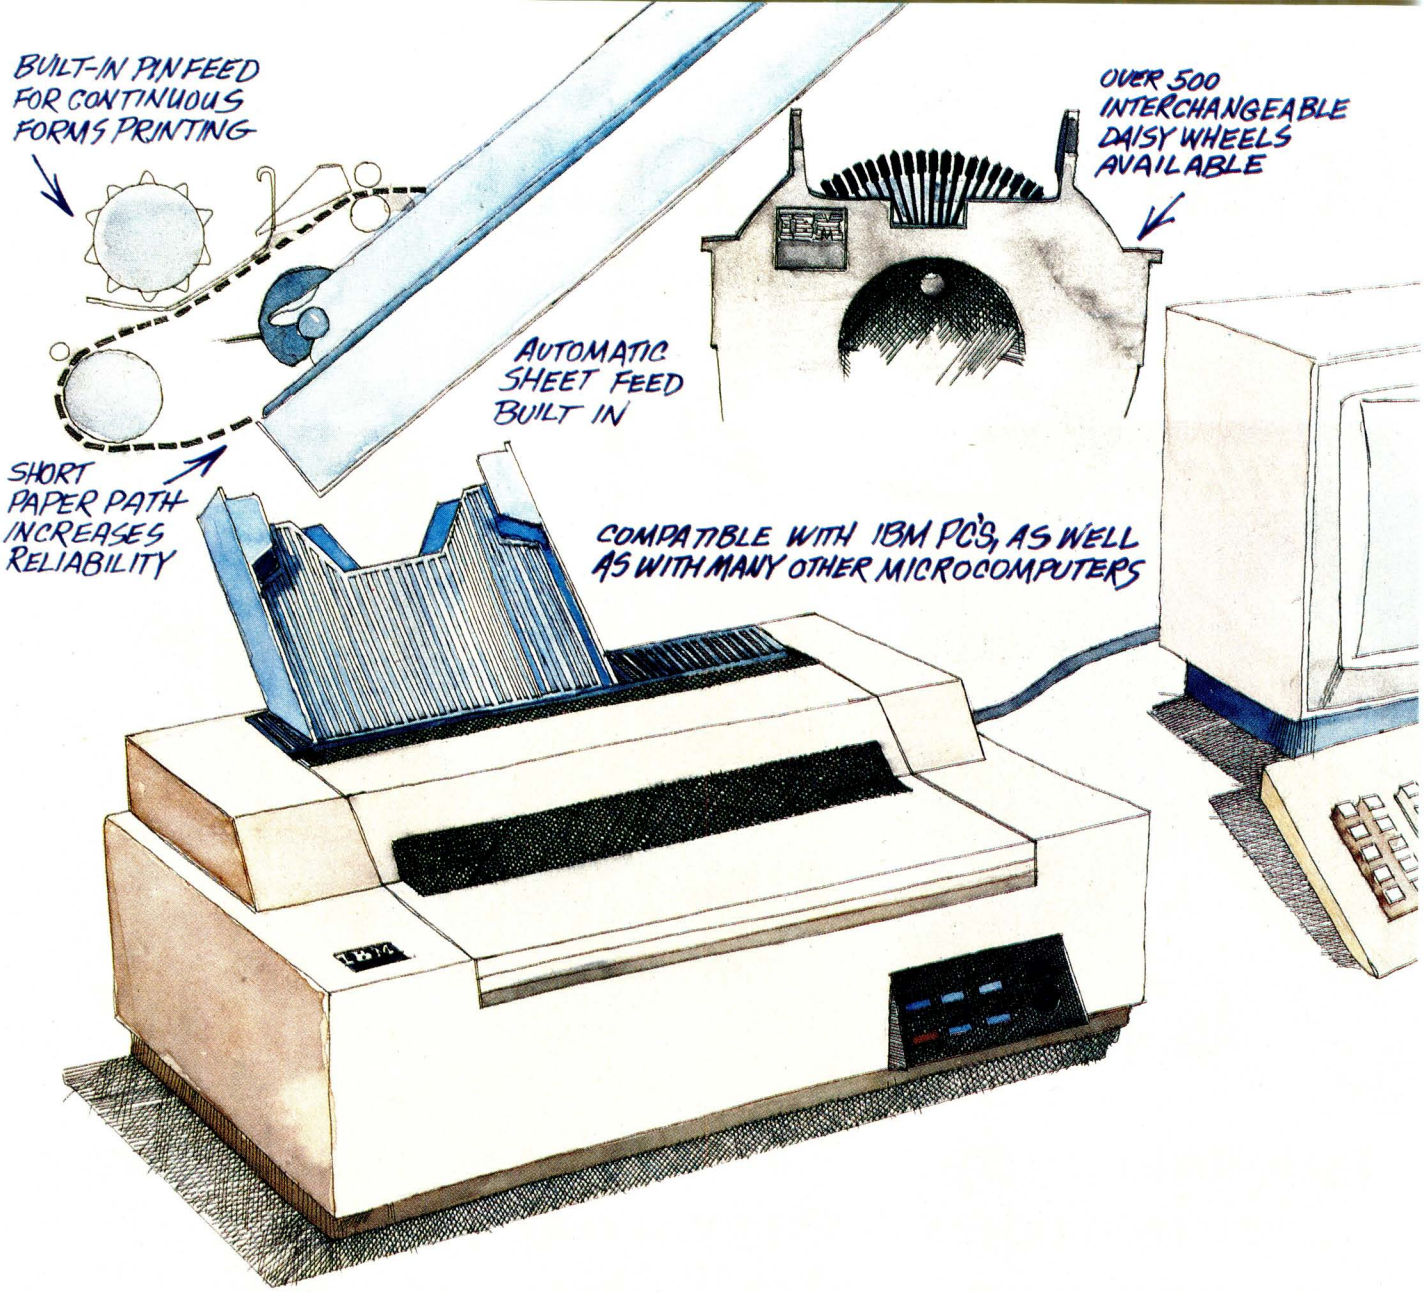

The new IBM Wheelprinter: A simpler path to letter quality.

The new IBM Wheelprinter is a personal computer printer with a simplified approach to paper handling.

This new IBM personal printer is the only daisy wheel printer that offers both a built-in sheet feed and pin feed capability. It's the latest example of IBM's expertise in the design and manufacture of reliable paper feeds.

Because it has a paper tray capacity of 100 sheets, large jobs can be printed without reloading. And, at the flip of a switch, you can go from automatic to manual sheet feed.

The Wheelprinter prints quietly on plain paper, letterhead, multi-part forms and even envelopes at up to 25 characters per second. And you can easily attach it to IBM personal computers and to many other microcomputers.

The Wheelprinter is just one example of the more than 70 printer models we build. But they all serve a single purpose: To make your printing as effective as your processing. To give your work the finishing touch.

Contact your IBM marketing representative or call 1 800 IBM-2468, Ext. 587/3W, for the IBM Product Center or authorized IBM dealer nearest you.

IBM®

IBM PRINTERS

The Finishing Touch

Inquiry 165

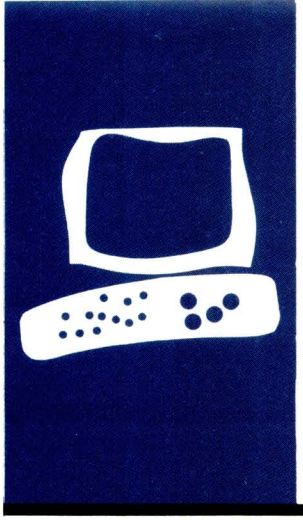

S·Y·S·T·E·M R·E·V·I·E·W

Gifford's MP/M 8-16

Here's a no-nonsense S-100 system

BY CHARLES H. STROM

Contrary to commonly expressed views, the S-100 bus is still very much alive. One study predicted a 40 percent growth in 1984 sales of S-100 systems. More than half the sales of S-100 systems and board-level components are attributed to CompuPro. Several years ago, it became apparent that CompuPro would do better to establish a dealer network rather than provide end-user support. One of the earliest authorized CompuPro System Centers was Gifford Computer Systems. In this review I examine a system that has been developed by Gifford based on CompuPro hardware and Gifford's own operating system (OS), known widely as MP/M 8-16.

HARDWARE

Gifford's MP/M 8-16 system is built around an S-100 mainframe and CompuPro circuit cards. A typical system consists of a 20-slot mainframe cabinet, dual Qume 842 double-density double-sided 8-inch floppy-disk drives (for a storage total of 2.4 megabytes), and a privately labeled and packaged Winchester hard-disk drive.

Gifford has researched the rapidly changing Winchester market and has offered the CompuPro Disk 2 and Disk 3 controllers, Morrow controllers, Konan controllers, and a wide variety of drives. The systems used in this review are based upon the Konan DGC-100 ("David") controller interfaced to an ST-506–compatible Ampex Pyxis hard-disk drive (manufactured by Rodime), offering a formatted capacity of 21 megabytes. This controller/drive combination has rather conservative specifications in terms of speed but has been found by the Gifford staff to be extremely trouble-free.

A typical three-user system is equipped with 320K bytes of memory. The OS itself requires 64K bytes for a basic system, and a 32K- or 64K-byte hard-disk cache (which is automatically flushed every 30 seconds or when a SYNC command is issued) also eats into the basic memory inventory. It quickly became apparent that there is no such thing as too much RAM (random-access read/write memory); I have 448K bytes in a four-user (plus modem line) system. Up to nine serial devices are accommodated by the CompuPro System Support and Interfacer 3 boards, and Gifford can configure systems with more serial ports.

The system supports four TeleVideo 950 terminals, a Diablo 630ECS printer, an Okidata Microline 82A printer, and a Racal-Vadic 3451 modem. Total RAM in the system determines how many devices may be used simultaneously as, of course, do the particular applications being executed at any time. I could thus add two additional terminals, though it is unlikely there is enough memory to support simultaneous operation of all consoles.

Gifford sells and supports the TeleVideo 925 and 950, the Freedom 200, and the GCS 80 terminal (manufactured by C. Itoh and privately labeled by Gifford). I've had no problems running any "atypical" terminal (such as the Zenith Z-29 I use on my MP/M 8-16 system at home).

CompuPro's M-Drive/H board, a popular option for the system, is a 512K-byte RAM-disk emulator. This board is integrated into MP/M 8-16 as drive N:, or it can be optionally made the A: drive using Gifford's SWAP command. The advantage of the latter approach is related to a feature of generic MP/M-86 that allows global access to any files on drive A:, USER 0 that have the SYS attribute set. Thus, you can place commonly used executable files, such as STAT.CMD, DIR.CMD, WS.COM and its overlays, on drive A: as SYS files and enjoy a significant speed advantage.

Normal system RAM can be partitioned at cold boot to be a pseudodisk (in this case drive M:), but there is no SWAP command to convert M: to A:.

BOOTING MP/M 8-16

The system is designed to run continuously; in fact, with the advent of version 2.1G,

(continued)

Charles H. Strom, director of laboratories at New York University (Department of Chemistry, 4 Washington Place, New York, NY 10003), is a chemical physicist by training and a computer user by choice.

Gifford supplies utilities to make the OS easy to use.

I have not needed to cold-boot the system for many weeks. In any case, it is not a terribly tedious process to boot up an MP/M 8-16 system. A floppy loader disk contains a bootstrap on the system tracks, and MPM.SYS, the actual OS image, is the only required file in the directory. Once booted, the hard disk is partitioned into several logical drives (A:, B:, and C: in my case), while the 8-inch floppy-disk drives are D: and E:. My single 5¼-inch floppy-disk drive (which requires a separate Disk 1 controller) is drive F:, and the M-Drive/H is N:. The 5¼-inch floppy-disk drive can read/write/format IBM- (CP/M-86) and Morrow-format disks. Gifford was having some trouble supporting double-sided 5¼-inch floppy disks at the time I obtained a single-sided add-on.

After loading MPM.SYS, the OS searches drive A: for several initialization files. MPMINIT.SUB is a SUBMIT file configured by the user for his particular system characteristics. When MPMINIT.SUB terminates, you can optionally execute a command, MPMINIT.CMD, go into multiuser mode, activating all terminals with a user-alterable banner and a NAME: prompt.

System Security

Gifford apparently has devoted a great deal of effort to system security, particularly in recent updates of its OS. The company has produced a reasonably secure system. It is possible to configure MP/M 8-16 with no security, a moderate level of security, or a relatively high level of security. Most users will opt for the middle route since it offers a good deal of safety without taxing the resources of the hardware to the point of significantly reduced throughput (every added security measure results in increased system overhead).

A PASSWD file has an entry for each user permitted on the system; security features also include two related utilities, NEWUSER.CMD and PASSWORD.CMD. NEWUSER.CMD is a program accessible only by the system manager (who must log in as SYSTEM with a unique password to use this program). It allows addition of new users to the PASSWD file; entry of an initial password for each user; default drive selection for each defined user upon logging in; accessible user areas; and default selection for printers, terminals, etc. The system manager can lock a user into a particular user area (or areas) or even into a particular 8- or 16-bit program. A user profile in the PASSWD file can thus be configured so that a person, upon logging in, is automatically shunted into WordStar, for example, and upon exiting from the program is logged off the MP/M system. Gifford uses this feature on a system in its offices with modem access. A customer may log in with the name MESSAG (no password is needed), and the message program is automatically executed, letting the customer leave communications for any of the Gifford staff.

The PASSWORD utility lets a user change his password at any time. Even the system manager does not have knowledge of individual passwords. In fact, since they are encrypted, there is no way to retrieve them. If a user forgets his password, the system manager can delete the entry in the PASSWD file and a new one can be added.

My major complaint with the security features of MP/M 8-16 is that there is no time-out function to automatically log out a user if there is no console activity for a certain time period. This makes it possible to hog system resources by logging in early in the morning and never logging out, even when not using the system. Also, since modems are typically used as consoles on MP/M 8-16 systems, a serious security flaw exists if a legal user is disconnected prematurely or neglects to type LOGOUT to exit the system before terminating the call. If an unauthorized party were then to call the system, he would be logged in under the legal user's PASSWD profile and could cause trouble. In addition, it would be convenient if the manager could force a user off the system.

System Utilities

Once you are logged on to the system, you can execute several files (such as LOGIN.SUB and LOGIN.CMD). All of the well-known MP/M-86 utilities are available, and since they are well documented in the Digital Research literature, I will not go into them in any detail. Gifford has added considerable functionality, however, in the form of new utilities. A prime example is the ability to run 8-bit software. With rare exceptions—some programs that perform direct BIOS (basic input/output system) calls—you can use the 8085 on the CompuPro dual-processor board to full advantage. Suppose I type WS FU.BAR at the system prompt. The OS looks for WS.CMD; if it finds it, the OS executes the command line normally. If it doesn't find it, the OS searches for WS.COM; and if WS.COM is located, the OS parses the command line again (transparently to the user) to SW WS FU.BAR and executes this new command line. SW.CMD is a Gifford utility that sets up the 8085 with a 64K-byte block of contiguous RAM and simulates a CP/M 2.2 environment, complete with 62K-byte transient program area, the actual memory available to a CP/M 2.2 program. Since it lets you preserve your investment in 8-bit software while converting to 16-bit programs at a measured pace, this is clearly one of the outstanding features of MP/M 8-16. And, since the 8085 is directly executing the machine code at 6 MHz, there is no degradation of operation as might be observed with an 8080 emulator running on a 16-bit microprocessor.

Gifford supplies a number of utilities to make the OS easier to use: TOD displays system time and date (using the hardware-clock chip on the CompuPro System Support board);

(continued)

AT A GLANCE

Name
Gifford MP/M 8-16

Manufacturer
Gifford Computer Systems
2446 Verna Court
San Leandro, CA 94577
(415) 895-0798

Processors
8-bit 8085, 6 MHz; 16-/8-bit 8088, 8 MHz

Memory
64K minimum to 1 megabyte maximum

Storage
Standard configuration includes two 8-inch double-sided double-density floppy-disk drives (1.2 megabytes each); 5¼-inch floppy-disk drives and 5- to 74-megabyte hard-disk drives are optional

Expansion
System enclosure is a CompuPro desktop unit with 20 IEEE-696/S-100 slots

Bundled Software
CP/M 2.2, CP/M-86, Concurrent CP/M, dBASE II (8-bit version), SuperCalc-86

Optional Equipment
Hard disks: 5-megabyte, $1660; 21-megabyte, $2660; 37-megabyte, $3860; M-Drive/H RAM disk with 512K, $995; CompuPro 8086 CPU board, $495

Price
Single-user system with two 8-inch floppy-disk drives and 64K RAM, $5330; eight-user system with two 8-inch floppy-disk drives, 1-megabyte RAM, 74-megabyte hard disk (two 37-megabyte drives), and additional user interface boards and equipment, $19,925

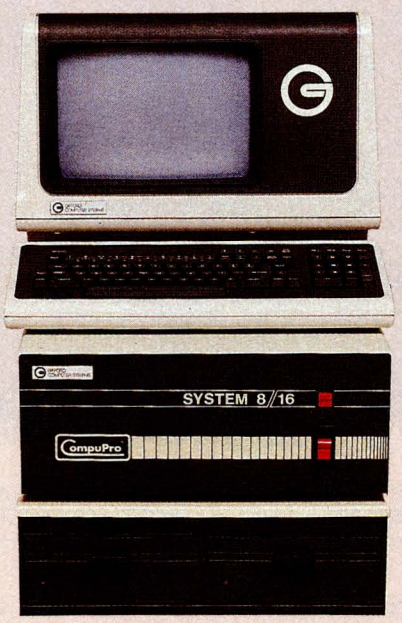

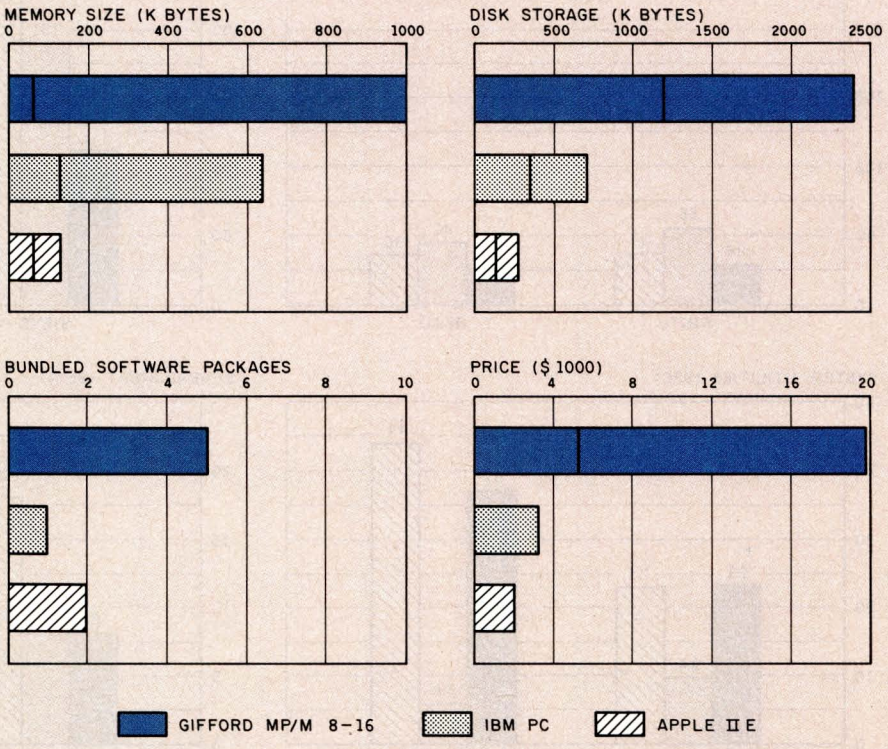

The Memory Size graph shows the standard and optional memory that's available for the computers under comparison. The graph of Disk Storage capacity shows the highest capacity for typical disk drives for each system. The Bundled Software Packages graph shows the number of software packages included with each standard system. The Price graph shows the list prices for a minimum, single-user Gifford MP/M 8-16 and also for the fully configured, eight-user system. This Gifford system is compared to systems with two floppy-disk drives, a monochrome monitor, graphics and color-display capability, a printer port and a serial port, 256K bytes of memory (64K bytes for 8-bit systems), the standard operating systems, and a BASIC interpreter for each system.

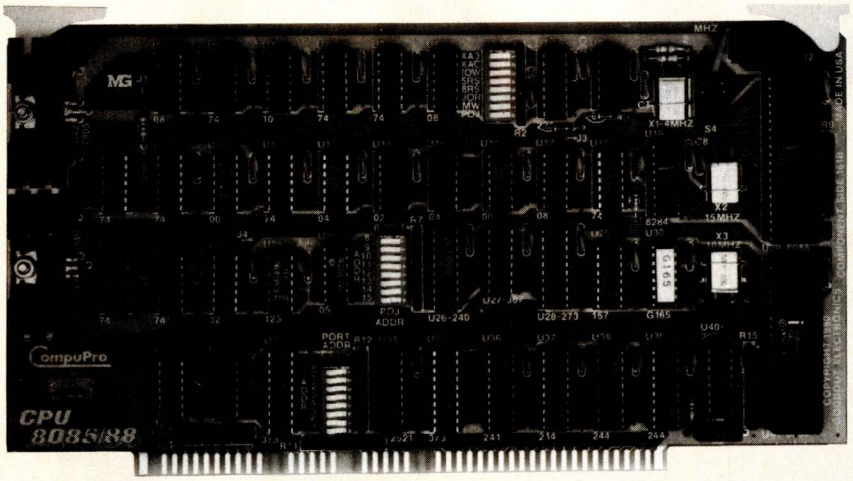

Gifford Computer Systems' MP/M 8-16 computer uses the CompuPro Dual Processor 8085/8088 board to run both CP/M-80 and CP/M-86.

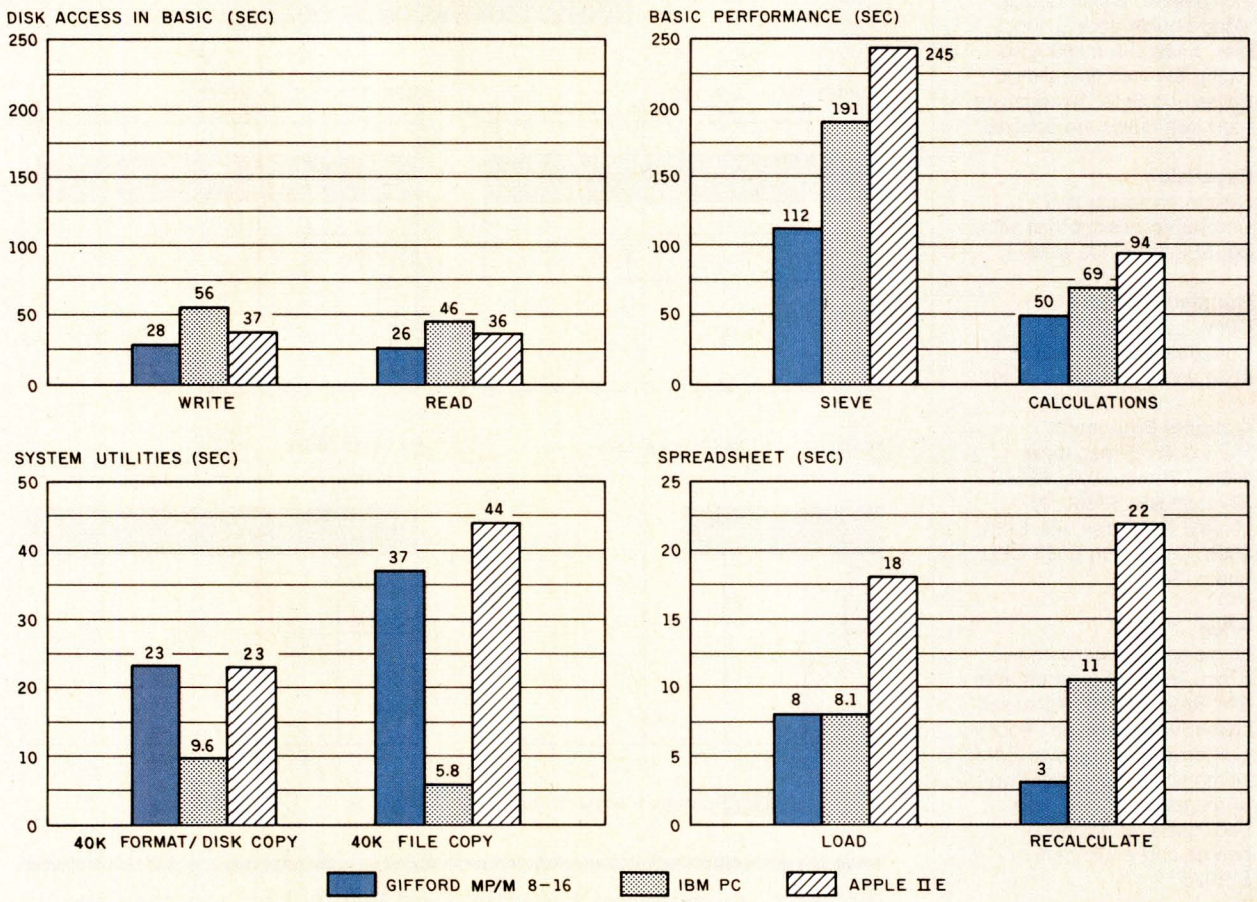

The graph for Disk Access in BASIC shows how long it takes to write a 64K-byte sequential test file to a blank floppy disk and how long it takes to read this file. (For the program listings, see the June BYTE, page 327, and the October BYTE, page 33.) The BASIC Performance graph shows how long it takes to run one iteration of the Sieve of Eratosthenes prime-number benchmark. In the same graph, the Calculations results show how long it takes to do 10,000 multiplication and division operations using single-precision numbers. The System Utilities graph shows how long it takes to format and copy a disk (adjusted time for 40K bytes of disk data). The Spreadsheet graph shows how long the computers take to load and recalculate a 25- by 25-cell spreadsheet, where each cell equals 1.001 times the cell to its left. The Apple and the IBM used Multiplan; the Gifford system used SuperCalc-86.

DOWN deactivates multiuser operation, aborting any tasks in process (and optionally executing DOWN.SUB); HISTORY is an optional file that maintains a complete chronological record of all commands submitted to the system; MOTD is a "message of the day" that is displayed upon logging in; SCHED schedules any command, program, or SUBMIT file to occur at a user-specified time; SETMEM defines the maximum memory block allocated to a 16-bit process; TIME is a program that can benchmark the duration of another program (and was used to record the BYTE benchmarks in this article; see table 1).

Several utilities are targeted toward the particular multiuser environment and deserve special mention. There is a sophisticated MAIL system modeled after the UNIX mail system, and WRITE allows real-time communication between users.

An exhaustive HELP facility provides on-line documentation of virtually all features of MP/M 8-16. HELP is fully documented, enabling a user to generate his own files and provide similar documentation for his own programs or processes.

Applications Software

The MP/M 8-16 system used in this review was bundled with an 8-bit version of dBASE II and a 16-bit version of SuperCalc. Apparently the CP/M-86 version of dBASE II is a poor performer, so this probably explains Gifford's furnishing this version. I also purchased a couple of software packages including WordStar and Spellguard (both 8-bit versions). Gifford is one of the few dealers that charges list price for such software. The company does deliver the MP/M 8-16 system with all purchased software (including applications and OS utilities) preinstalled on the hard disk, which saves the user considerable time and effort. Getting the computer running is essentially a plug-and-go operation.

One last product worthy of note is Modem 8-16, Gifford's proprietary communications utility. Modem 8-16 is one of the few communications programs that will run on an MP/M 8-16 system. It has a flexible and versatile user interface, supports script files, handles auto-dialing modems, unattended operation, and file transfer in conjunction with SCHED, and more. Modem 8-16 is one of the nicest communications programs I have seen. Its one serious deficiency is the absence of any error-checking protocol for file transfer. Modem 8-16 does transfer files with XON/XOFF handshaking, but it does not include the Christensen (XMODEM) or CIS (CompuServe Information Service) protocols. I have indications that the company will soon add error-checking file-transfer protocols to a new version of Modem 8-16.

Documentation and Support

In recent months, Gifford has made significant strides in improving its documentation of MP/M 8-16. In the

(continued)

Table 1: *Benchmark results for the Gifford MP/M 8-16 System. The BASIC benchmarks were determined using an 8-bit version of Microsoft BASIC 5.2. SuperCalc-86 version 1.0 was used in the spreadsheet benchmarks.*

Benchmark	System and Time
BASIC	
Sequential write	
—to single-sided single-density floppy disk	MP/M 8-16, 28 seconds CP/M-80, 27 seconds
—to hard disk	MP/M 8-16, 14 seconds CP/M-80, 12 seconds
Sequential read	
—from single-sided single-density floppy disk	MP/M 8-16, 26 seconds CP/M-80, 25 seconds
—from hard disk	MP/M 8-16, 14 seconds CP/M-80, 10 seconds
Sieve of Eratosthenes	MP/M 8-16, 112 seconds CP/M-80, 99 seconds
Calculate with single-precision numbers	MP/M 8-16, 50 seconds CP/M-80, 45 seconds
System Utilities	
Format and disk copy (including copy verification)	
—single-sided single-density (243K bytes)	MP/M 8-16, 38 seconds
—double-sided double-density floppy disk (1.2 megabytes)	MP/M 8-16, 23 seconds
Copy file (40K-byte, using PIP)	
—hard disk to single-sided single-density floppy disk	MP/M 8-16, 23 seconds
—hard disk to double-sided double-density floppy disk	MP/M 8-16, 13 seconds
—hard disk to hard disk	MP/M 8-16, 11 seconds
—single-sided single-density to single-sided single-density floppy disk	MP/M 8-16, 37 seconds
Spreadsheet	
Load spreadsheet	
—from single-sided single-density floppy disk	MP/M 8-16, 8 seconds CP/M-86, 10 seconds
—from hard disk	MP/M 8-16, 4 seconds CP/M-86, 6 seconds
Recalculate	MP/M 8-16, 3 seconds CP/M-86, 3 seconds

past, it could have been argued that someone with a "hacker" mentality should install and maintain the system; the documentation consisted of the not-uncomplicated Digital Research MP/M-86 manuals (not to be confused with the brain-damaged 2.2 manuals—the MP/M-86 manuals are far superior) and a thin 8-16 implementation manual containing much information that can only be described as extremely terse. Luckily, this deficiency has been addressed, and the new Gifford manual is a tremendous improvement. The MP/M 8-16 users manual is bound in an attractive "IBM PC-style" loose-leaf binder, consisting of hundreds of pages of clearly written and indexed documentation. Special attention is given to system set-up, descriptions of every available command, system software maintenance, security measures, and hardware trouble-shooting. The manual is supplemented by a bimonthly newsletter that announces new products, updates, patches, user contributions, etc.

Gifford appears to take its role of providing customer support quite seriously and offers several types of support, including the newsletter, an on-line message system, and a dedicated telephone-support staff. I have used the latter service several times; the support offered by the Gifford staff is unparalleled in the industry. The people are knowledgeable and involved in the software-development effort at Gifford.

Since all boards sold by Gifford are CompuPro CSC grade, they carry an unconditional two-year replacement warranty. I recently experienced a failure of an M-Drive/H board, contacted Gifford, and had a replacement board the following day. I am not aware of the service policy on hardware more than two years old or not from CompuPro.

Criticisms

This review is complimentary. I should admit that frankly I find little on which to fault Gifford, and I am not inclined to review a product unless I feel strongly enough about it to use it heavily over an extended time period. To be fair, however, there are some areas needing improvement.

The most serious problem I have with MP/M 8-16 is its treatment of modem ports and its lack of auto-logout. Another problem area is the use of the M-Drive/H as drive A:. Although the basic speed advantage is there, it seems that several utilities, particularly those dealing with user accounts and passwords, do not deal effectively with a volatile A: drive. There are ways to get around this shortcoming, but they are circuitous and are not documented.

Another shortcoming is that the so-

(continued)



For just $99, the Personal Computer Line Tamer™ power conditioner protects your computer from 99.5% of all dirty power problems. Line Tamer power conditioners have a long, successful track record of providing clean power to mainframes, minicomputers and small computer systems. *Now microcomputers can get the same total protection, for just $99!*

This is the best power protection you can buy! Line Tamer ferroresonant technology protects against voltage spikes, transients and noise, while providing constant 120 VAC power to your computer to protect against brownouts and overvoltages, too. Other products protect against some of these, but not all. For just a few dollars more, your computer will be protected against everything but a power outage, and the PC Line Tamer will still maintain power during interruptions of up to 3 milliseconds.

Personal Computer Line Tamer power conditioners are rated at 150 VA. They feature four rear panel plug receptacles, a six-foot power cord and an attractive bone color case that fits into any office or home decor. For larger micro systems, we recommend the 300 VA PCLT at $139.

See your local dealer and compare what you'd have to pay for other power "protection" products with the performance of the $99 Personal Computer Line Tamer. You'll see just how affordable *real* power protection is.

NEED BLACKOUT PROTECTION?

Personal Computer Line Tamer uninterruptible power systems offer equal value.

- Up to 40 minutes of backup power
- Always on-line
- Maintenance-free
- Full power conditioning, too!

Call or write for information.

LINE TAMER™
POWER CONDITIONERS
UNINTERRUPTIBLE POWER SYSTEMS

SHAPE MAGNETRONICS, INC
THE CLEAN POWER SOURCE
901 DuPage Avenue, Lombard, IL 60148
Phone 1 312 620-8394 • TWX 910-991-2352

Inquiry 315

A few smart reasons to buy our smart modem:

Features	Ven-Tel 1200 PLUS	Hayes
1200 and 300 baud, auto-dial, auto-answer	Yes	Yes
Compatible with "AT" command set	Yes	Yes
Can be used with CROSSTALK-XVI or Smartcom II software	Yes	Yes
Regulated DC power pack for cool, reliable operation	Yes	**No**
Eight indicator lights to display modem status	Yes	Yes
Speaker to monitor call progress	Yes	Yes
Attractive, compact aluminum case	Yes	Yes
Two built-in phone connectors	Yes	**No**
Compatible with The Source and Dow Jones News Retrieval	Yes	Yes
Unattended remote test capability	Yes	**No**
Phone cable included	Yes	Yes
Availability	Now	
Price	**$499**	**$699**

The Ven-Tel 1200 PLUS offers high speed, reliable telecommunications for your personal computer or terminal. Whether you use information services or transfer data from computer to computer, the Ven-Tel 1200 PLUS is the best product around. Available at leading computer dealers and distributors nationwide.

Also from Ven-Tel: internal modems for the IBM and HP-150 Personal Computers with all of the features of the 1200 PLUS.

You choose. The Ven-Tel 1200 PLUS—the smartest choice in modems.

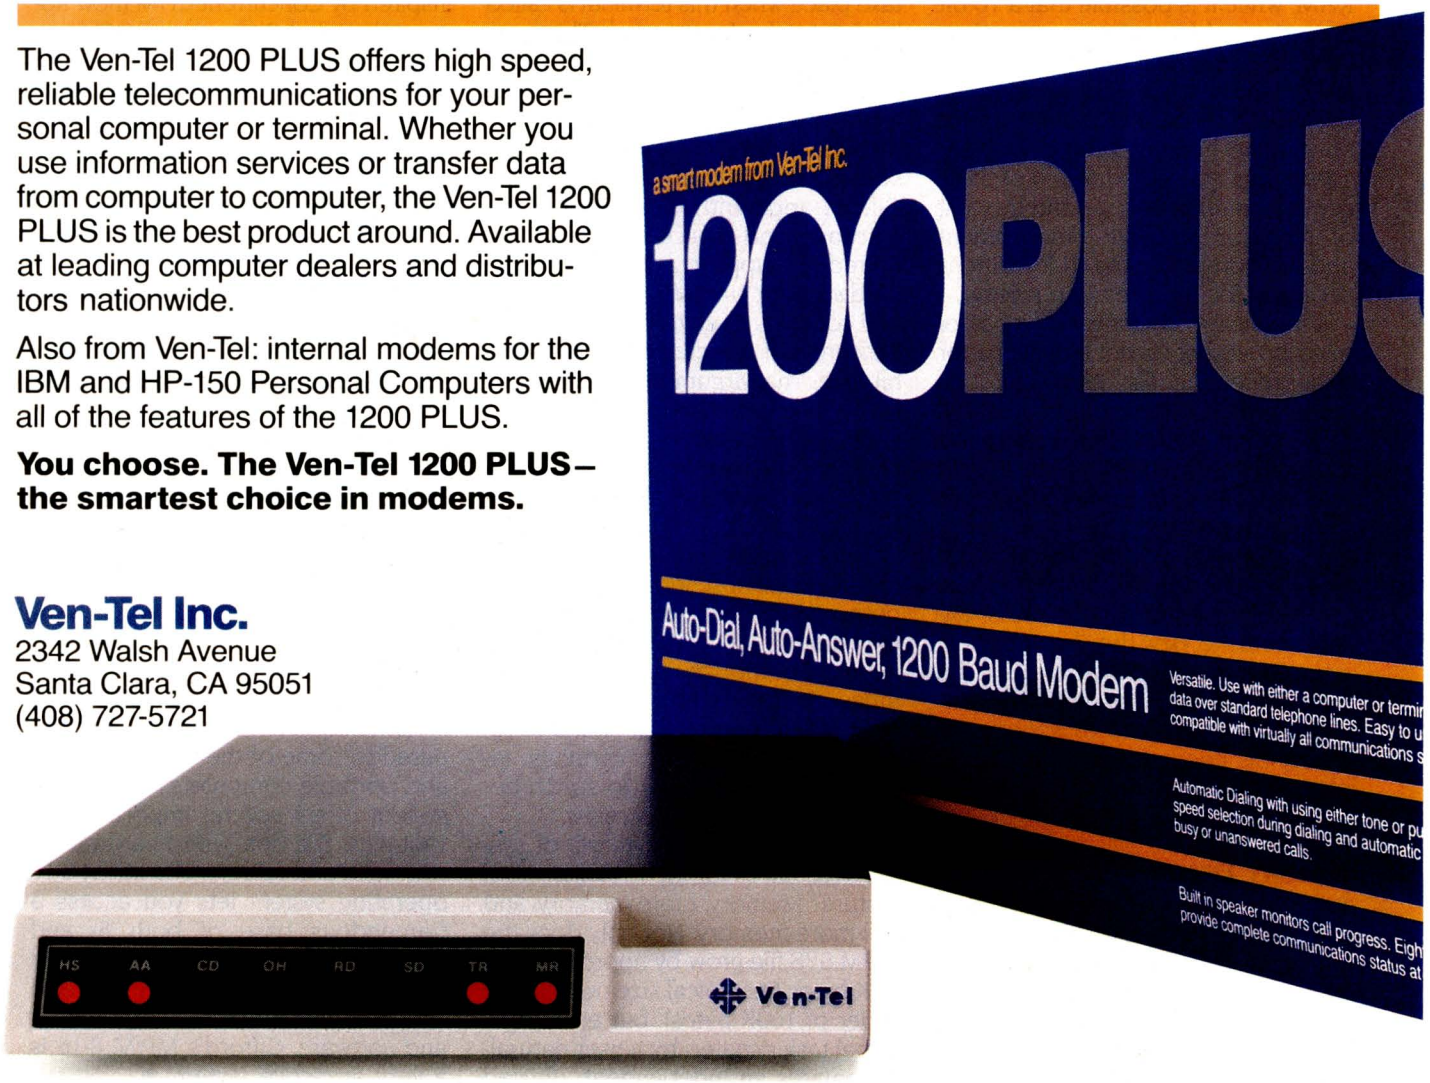

Ven-Tel Inc.
2342 Walsh Avenue
Santa Clara, CA 95051
(408) 727-5721

Crosstalk is a trademark of Microstuf; Hayes and Smartcom II are trademarks of Hayes Microcomputer Products.

Inquiry 361

phistication of the OS has extracted a dear cost in terms of system RAM requirements. It is safe to say that there is no such thing as too much RAM on an MP/M 8-16 system. The 384K-byte three-user system widely advertised by Gifford indeed supports three users in many cases, but another 128K bytes of memory would make life much more pleasant. This is really more of an observation than a criticism. Gifford freely admits this requirement. In fact, the company encourages prospective purchasers to consider more RAM in their planned systems and warns that the budget-conscious may run into difficulty. Each 8-bit process running under the OS requires a 64K-byte block of contiguous RAM, while it is possible that a 16-bit process could require more or less than this. Making matters worse, Gifford charges virtually list price across the board for the hardware it offers, so bargain hunters need not apply. The axiom "you get what you pay for" certainly is relevant here, and the cost of superior software development and support staff offered by Gifford accounts for the premium pricing.

A multiuser OS running on a pair of microprocessors is not a panacea for data-processing ills. Although it is theoretically possible to run an MP/M 8-16 system with a dozen users, it's probably more realistic to use four to six consoles simultaneously. This depends upon the type of work being performed; running WordStar, for example, is much less taxing on system resources than SuperCalc is. Gifford seems to view the "horsepower" issue in a practical light and will be able to advise a prospective purchaser if an MP/M 8-16 system will satisfy his needs (as long as Gifford can get a clear idea of the proposed application).

Recent Developments

With the latest release of MP/M 8-16 (version 2.1G), Gifford has added a significant enhancement it calls "virtual terminals." Modeled after the virtual-console concept of Concurrent CP/M, virtual terminals provide each user with true multitasking operation. In contrast to plain MP/M-86, where a detached process pauses when any console I/O (input/output) is required, virtual terminals let terminal output be buffered to a temporary file. You switch screens with a user-defined "escape" sequence and thus can conveniently toggle among up to four virtual terminals per physical terminal. Gifford's implementation of this feature depends on hardware in the display terminal to support an additional page of display memory for each virtual screen so that you do not lose your bearings when switched among virtual terminals. In other words, if there is no console output while a given virtual terminal is in the background mode, no screen updating will take place when this terminal is called back into the foreground. This contrasts with Concurrent CP/M, which enables RAM-resident screen buffering for each virtual console and automatic screen redraw whenever a console is brought into the foreground. Gifford apparently decided that the software and space overhead required to support a lot of terminal hardware for implementation of virtual consoles as envisioned by Digital Research for Concurrent CP/M is prohibitive. That argument certainly has merit, and addition of hardware to support the background screen displays has the benefit of no additional processor overhead as required by the Digital Research approach. I have, in fact, implemented the Gifford virtual-terminal scheme on hardware both with and without alternate display memory; I have found the latter is usable, though inconvenient at times. Programs such as WordStar, which do not have a command to repaint the screen, are certainly inconvenient if you want to switch between several virtual screens.

What do you pay in terms of systems resources for the virtual-terminal feature? Memory, more memory, and still more memory. Not only does the MPM.SYS file grow by approximately 64K bytes (its typical size now on the order of 160K bytes), but each additional task initiated by a user naturally requires an independent, unused segment of RAM. For example, if I run an 8-bit WordStar on VT1, it requires a contiguous 64K-byte block (as does any 8-bit process); and if I am assembling a 16-bit program on VT2 using ASM86, it also requires RAM, just as though another user were running it. It should be clear how quickly my 448K bytes of memory becomes insufficient for several users, all of whom want to run several processes concurrently. Suddenly, 1 megabyte of addressable memory space for the 8088 processor does not sound infinite after all.

The addition of virtual-terminal operation to MP/M 8-16 represents the zenith of development of this OS. Gifford's virtual-terminal scheme was inspired by Concurrent CP/M (now apparently called Concurrent DOS) from Digital Research. Gifford is already running its own version of Concurrent CP/M 8-16 in house and will be releasing it by the time you read this. The user interface will be virtually indistinguishable from MP/M 8-16, but Gifford has promised significantly improved hard-disk speed.

Gifford is also quite proud of its implementation of DR Net, a local-area network based on Datapoint's ARCNET hardware and released along with Concurrent CP/M. DR Net supports the networking of CompuPro and IBM PC hardware running under Concurrent DOS. Each user may have access to any peripheral or system resource on the network. Gifford is busily modifying its utilities to operate across the network.

Summary

Although the use of an S-100–based system may seem anachronistic compared to some of the newer desktop and portable computers, the Gifford system offers several important advantages. The CompuPro hardware is rock-solid and reliable. The MP/M 8-16 operating system lets you access a tremendous base of both 8- and 16-bit software. Because it is tailored to a particular user environment and comes complete with all equipment and software, Gifford's MP/M 8-16 is a very attractive system. ■

from MicroComputer Accessories, Inc.

LOCK & ROLL.



It's here to stay. Our Rolltop 100 Disk File,® with optional lock, holds 120 5¼″ diskettes (twice the capacity of "flip top" files), in ten sections, with color coded divider labels. Anti-skid feet. Textured buff plastic body with your choice of bronze baked enamel or walnut rolltop. Also available in black with silver mylar rolltop. And 3½″ microdiskette and 8″ disk models. They're all lock & roll to you.

Inquiry 233

MicroComputer Accessories, Inc.

5721 Buckingham Parkway
P.O. Box 3725
Culver City, California 90231
Telephone 213/641-1800

In Europe:
N.V. Microcomputer Accessories Europe S.A.
Rue de Florence 37
1050 Bruxelles, Belgique
Telephone 02/538.61.73

These and other fine products are available at Sears Business Systems Centers, Computerland, Businessland, IBM Product Centers and other computer/software retail locations.

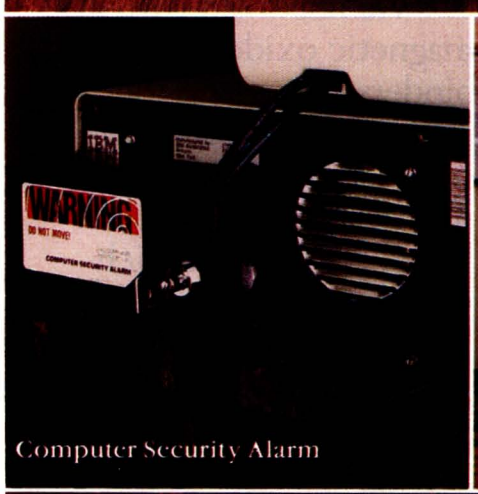

Computer Security Alarm



Tilt 'n Turn

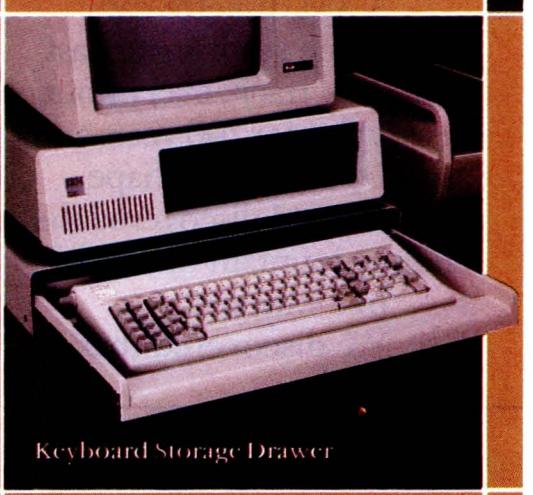

Keyboard Storage Drawer

You live so

A 3M diskette can make one read/write pass on every track, every hour, every day for 200 years and still be in terrific shape.

Has 3M discovered the floppy fountain of youth?

In a way, yes.

We discovered that if you want to make a floppy that's certified 100% error-free and guaranteed for life, you have to make every last bit of it yourself.

That's why we're the only company that controls every aspect of the manufacturing process.

We make our own magnetic oxides. And the binders that attach them to the dimensionally stable substrate. Which we make ourselves from liquid polyester. Which we make ourselves.

We also test our

should long.

floppies. At least 327 ways. And not just on exotic lab equipment with perfectly aligned, spotless heads. But also on office equipment like yours. We even reject a diskette if its label is crooked.

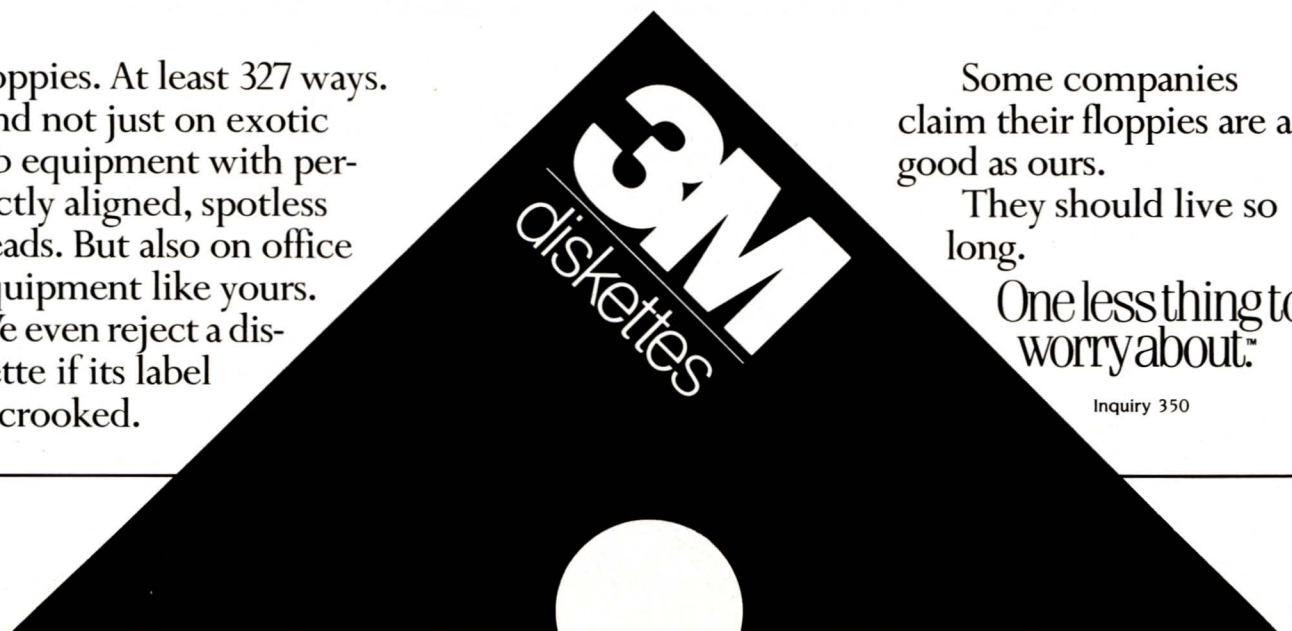

Some companies claim their floppies are as good as ours.

They should live so long.

One less thing to worry about.™

Inquiry 350

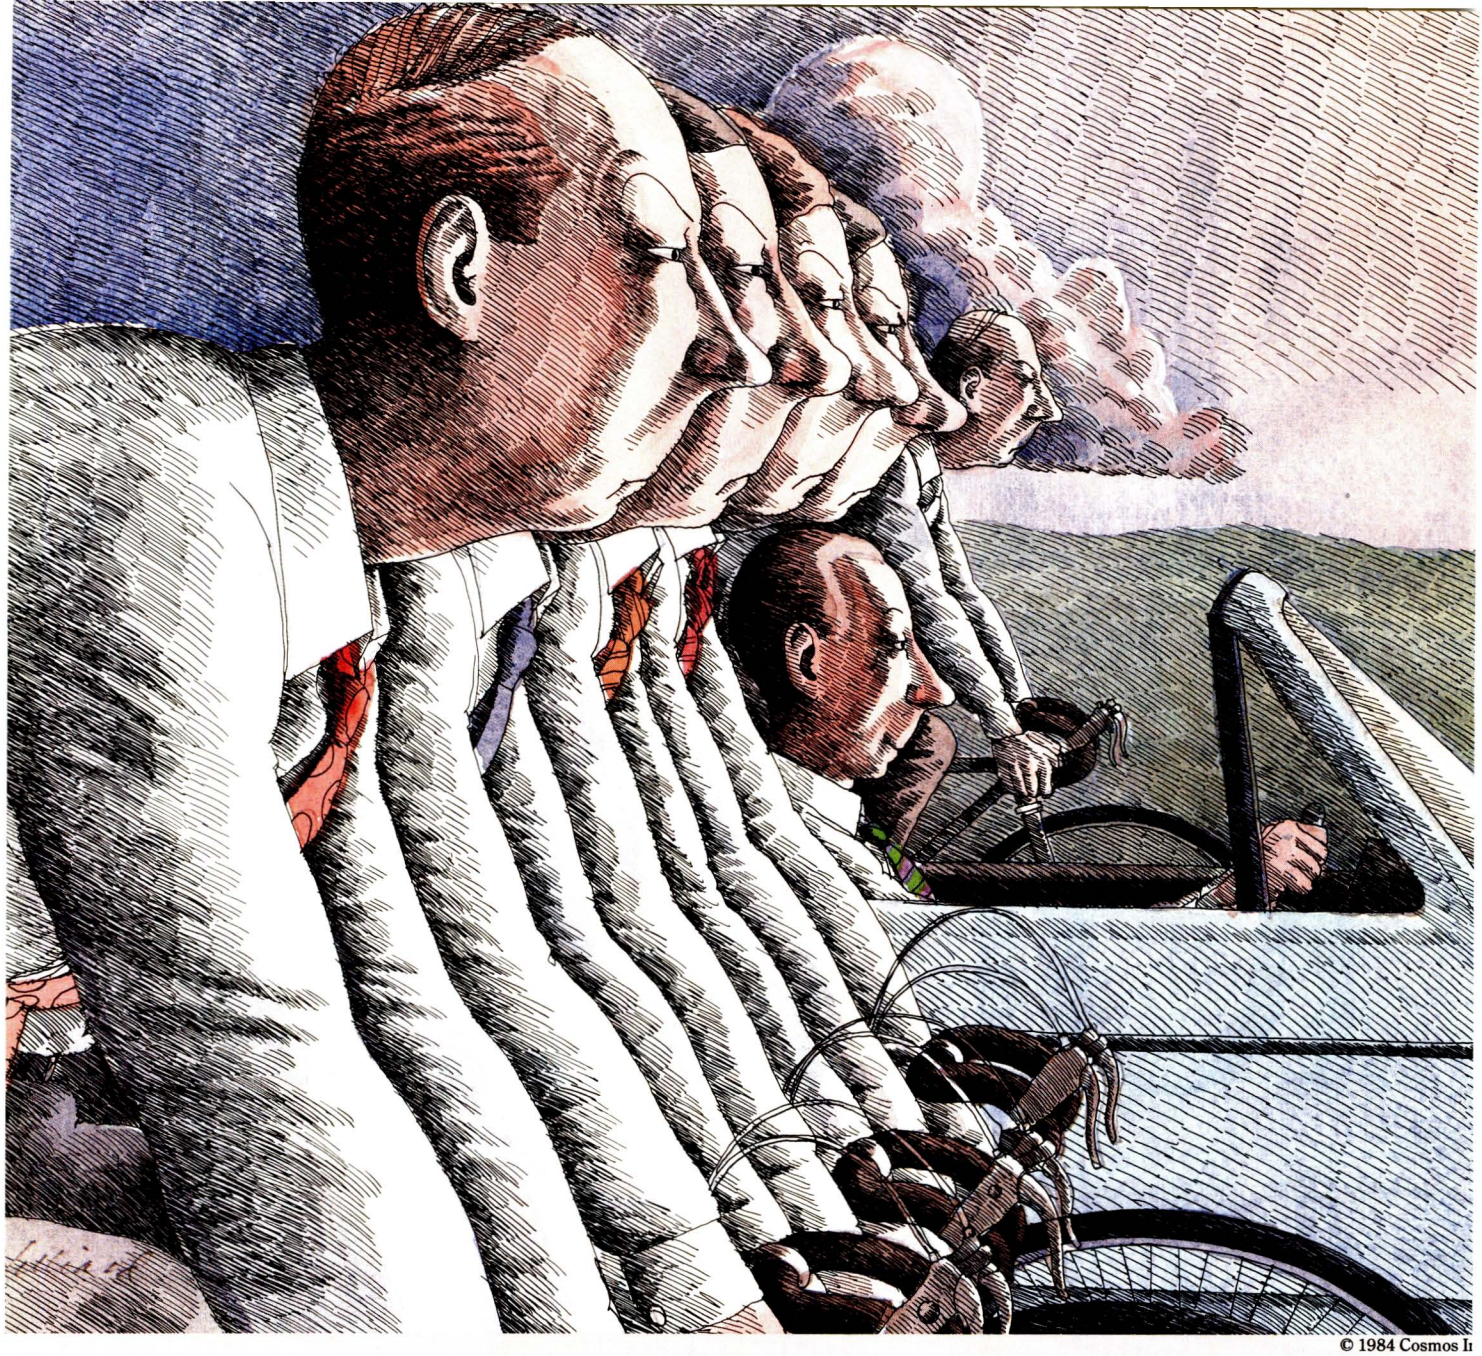

© 1984 Cosmos I

Revelation®. Because the object is to win.

Winning isn't easy when you have to work harder than your PC because your relational database falls short.

That's why experienced users power their PC's with the Revelation® "Applications Environment" from Cosmos.

More than a relational database. Revelation gives you the tools and flexibility you need to prototype and develop even the most exotic microcomputer applications with relative ease and efficiency. Revelation uses plain English to create files, fields, entry screens and menus, process information, make simple inquiries or generate complex reports.

Revelation's R/DESIGN applications generator does the work for you, or you can switch to Rev's structured R/BASIC language for precise program customization. You can make changes in programs, screens or data structures in a matter of seconds without having to start from scratch.

Revelation works with MS/DOS™ so you can take advantage of all your favorite microcomputer software packages, and Rev's "Open Environment" communications concept allows interactive access to many mainframe and minicomputer systems. Networking and runtime versions are also available.

When you need more than a simple database, Rev up your PC with Revelation, the "Applications Environment" from Cosmos.

Contact us by phone or write and we'll arrange an unforgettable demonstration for you with a Cosmos representative in your area.

MS/DOS™ of Microsoft Corp.

Inquiry 89

COSMOS™

Cosmos Inc. 19530 Pacific Highway S. Seattle, WA 98188, (206) 824-9942

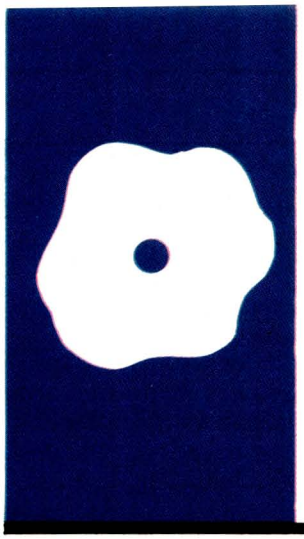

Lotus's Symphony

Real and rational advances over 1-2-3

BY DICK POUNTAIN

After Lotus 1-2-3 was released, Lotus Development Corporation was faced with the problem that every hit-maker faces: What next? The company responded with Symphony, another large multipurpose spreadsheet program (see the Preview "Symphony: A Full-Orchestra Version of Lotus 1-2-3," by Rik Jadrnicek, July 1984 BYTE, page 121).

When I first used 1-2-3, I had a feeling that Lotus had raised the stakes in the personal computer software market. It wasn't so much a matter of performance because, although the program works very well, you can find competitors in each of 1-2-3's application areas that perform equally well. It was the design, ergonomics, documentation, and packaging that made 1-2-3 a superior product. Lotus 1-2-3 was a polished product in an industry that had needed a good dose of professionalism.

Symphony is based on the same spreadsheet data metaphor as 1-2-3, and this spreadsheet is also located entirely in main memory. Despite last year's rumors, it doesn't have any form of virtual memory management (i.e., swapping to and from disk to make the memory look bigger).

When you first boot Symphony up, the displayed spreadsheet looks similar to 1-2-3's, and an experienced 1-2-3 user could start entering data immediately. However, significant differences in the command-menu structure soon become apparent. When you use Lotus 1-2-3 you press the slash key to access one master command menu, but Symphony has two menus. You access these with the IBM function keys F9 (called "Services" on the supplied plastic overlay) and F10 ("Menu").

The F10 key brings you to a menu that roughly corresponds to the 1-2-3 master menu (Lotus also lets you access this menu by pressing the slash key). However, the Symphony/1-2-3 menu options don't correspond; some of 1-2-3's options are now in Symphony's Services menu and some submenus are in different places. This means that only a few of the 1-2-3 keyboard macros will run unaltered on Symphony, and many will run with undesired results (e.g., /ws will give you "Worksheet Status" in 1-2-3 and "Width Set" in Symphony).

Symphony menus work even better than 1-2-3's. They're well designed and can easily cope with the extra function load by presenting different context-specific main menus for each environment. The program's services, on the other hand, remain the same as 1-2-3's throughout, including such basics as file saving and retrieval. Overall, Symphony provides a good balance between command consistency and context sensitivity.

Symphony's on-line help facility (the F1 key) is just as good as 1-2-3's so you won't have to spend much time poring over the manuals. However, because Symphony is so large, the help facility can't fit on the same disk as the rest of the program. You have to replace the program boot disk with a Help and Tutorial Disk (in drive A) if you want on-line help on a floppy-disk-based system. I could do without this disk swapping, but Symphony handles it gracefully and gives you all the right prompts at the right times. On an IBM PC XT (or other machines with larger floppy disks) disk swapping won't be a problem.

WINDOWS

Lotus 1-2-3 has a limited form of "windowing"; it splits the spreadsheet into independently scrolling areas. In Symphony, the windowing capacity has been enhanced enormously. You can create different types of windows that can be moved around freely on the screen, shrunk or expanded, and overlapped. Symphony has five types of windows that correspond to the five separate application areas of the program; the spreadsheet window is called Sheet, the word-processor window is Doc, the database-manager window is Form, the graphics window is Graph, and the telecommu-

(continued)

Dick Pountain is a technical author and software consultant living in London, England. He can be contacted c/o BYTE, POB 372, Hancock, NH 03449.

nications window is called Comm.

It's important to understand how Symphony windows differ from the "desktop" style of windows used by the Lisa, Macintosh, Visi On, etc. Symphony's windows present different ways of viewing the *same* data. The spreadsheet, organized in cells, is always the base program. You can change the type of window at will. For example, you can enter a document into a Doc window (which looks like a word-processor screen with a format line), move it to a Sheet window (the text appears in a column of the spreadsheet), and then transfer it to a Comm window and send it to a remote computer with your auto-dial modem.

On the Lisa, the different windows let you accomplish different tasks, which are performed by different programs on different data files. To exchange data between the different windows (hence, different files) you have to cut and paste.

Symphony also can let you look into different jobs (perhaps a financial model and a report), but those jobs would have to be in different areas of the same spreadsheet in memory. This makes the program less complex than the Lisa's desktop environment, but it is not necessarily inferior.

An IBM PC with a Symphony program runs faster than the Lisa or Mac loaded with a similar application. Because all the data is in RAM (random-access read/write memory) Symphony is never disk-bound and the program's response time is very fast. This is particularly true when you have to copy and move data; the spreadsheet operations are much faster than cutting and pasting.

The main drawback to Symphony's type of windows is that, by sharing the spreadsheet between different jobs, Symphony places some of the onus on you to make sure that the jobs don't interfere with each other. For instance, inserting and deleting columns or rows globally can interfere with something at the other end of the sheet.

Symphony doesn't use a mouse to manipulate windows. Instead it relies on the function and cursor-control keys (in established Lotus style). The commands are exceptionally well thought out and I doubt that using a mouse would be any faster. For example, you can flip between windows by hitting a single key; if you hit the Alt key and the first key again, the current window will "zoom" to full screen size. If you use the End key in conjunction with the other cursor and page keys you will be able to move quickly around even the largest sheets or documents.

Symphony helps you isolate different data areas on the sheet. For example, in the database and word-processing environments it won't accept data that would overwrite occupied cells. In addition, you can restrict the cursor's movement within a window to a specified range by recording its boundaries on a settings sheet.

Every part of Symphony has its own settings sheet. These appear as control panels when you choose "Settings" from the menu. These sheets can be given unique names and saved on disk independently of the main worksheet. Document settings sheets store document formats; Form settings sheets store the structure of databases; Window settings sheets store the name and properties of a window, etc.

Experienced Symphony users will have a complete set of such sheets so that each application will boot up exactly the way they want it. For novices, settings sheets can be somewhat overwhelming; it's probably best to set your screen parameters manually from the keyboard. The settings sheets are good news for the "value-added" vendors. Together with the extended macro language, which I will discuss later, they make it easy to write custom applications in Symphony.

Doc

The text-editing facilities in 1-2-3 are so rudimentary that Lotus, showing commendable restraint, never claimed that it had word-processing capabilities. However, the word-processing facility in Symphony should be adequate for any low-volume user. It does not have features that professional and technical authors may demand (for example, it lacks footnote management and conditional page breaks), and techno-snobs may lament the absence of screen-displayed attributes such as boldface and italic. And it doesn't have a spelling checker. On the other hand, it's simple and pleasant to use, which cannot be said for some of the state-of-the-art programs I've seen.

To enter text, you create a Doc window or change the type of an existing window to Doc. The row and column numbers disappear and are replaced by a format line showing margins and tab stops. Then type as you would with any other word processor. The editor can insert text and overtype. It has automatic word wrap and automatic justification (left, right, or center) that you can disable if you want.

Printing is largely "what you see is what you get" and there is no separate formatting pass. Double and triple spacing aren't shown on the screen (except as flags). Boldface and other type attributes must be set with embedded codes. However, you can put all the IBM alternative characters onto the screen with the Compose key. Automatic page breaks are not visible, but if you press a Where key the program will tell you your page and line location on the printed document. Manually inserted page-break characters are visible.

The Search and Replace functions are excellent; they allow you to manually replace or skip some specific instances of the target test and then say "go ahead and do all the rest"—a feature that is missing from many well-known word-processing packages. The Search function is case-sensitive, and paragraphs are automatically rejustified after text is replaced.

Symphony lets you invoke special lines in the text that override the margin, tab, and indent settings of the master format line at the top of the screen so that you control the page's

appearance. These special format lines can be given names, stored, and recalled when you need them. You can also invoke a GOTO command to bring up a named format line. Because this system is wholly visual, it is easier to understand its workings than abstract environments or "style sheets," but it is complicated by things such as nested numbered subparagraphs. Headers, footers, automatic page numbering, and date stamping are all supported.

Holding all the text in RAM is not a problem for the hardware for which Symphony is intended. I managed to get a 32,000-word document into an IBM PC with 512K bytes of RAM, and it took less than a second to go from beginning to end. Try that with virtual memory!

Symphony has all the facilities of a spreadsheet, database, and programming language available when you are word processing. With Symphony, it's possible to write formulas or macro programs to do mail-merge and other document manipulation.

FORM

The Symphony database is the program's largest single improvement over 1-2-3. In 1-2-3, Lotus uses the columns of the spreadsheet for fields, which make the data structure tangible. Unfortunately, this involves the user at too low a level, defining input and output cell ranges.

In Symphony, this feature has been replaced with the Form window. To set up a database in Symphony, type the names of the fields you want into consecutive spreadsheet cells. Then create a Form window. When you hit the GENERATE command, you'll be asked to choose the default field type and length (from a menu), and then to point to the range of cells containing the field names. The new window becomes a data-entry form. Data can be entered immediately and all your interaction with the database (including searches and sorts) can be performed with this form if you want.

Browsing through the records, inserting and deleting records, and

(continued)

AT A GLANCE

Name
Symphony

Manufacturer
Lotus Development Corporation
161 First St.
Cambridge, MA 02142
(617) 492-7171

Price
$695

Size
Program takes about 300K bytes of memory and Lotus recommends at least 320K bytes

Features
Variable, overlapping windows; data can be viewed as text, spreadsheet, or structured records; integral report generator; programming macro language; add-on applications; drivers for displays, printers, and modems

Documentation
Two manuals, an *Introduction* booklet, a *Quick Reference Guide*, and a *Glossary*; disk-based Help and Tutorial Disk program

Comments
Easy to use and learn; fast response in most operations; individual functions (spreadsheet excepted) are not as powerful as best of stand-alone competitors; could serve well as sole computing resource if your data volume is low

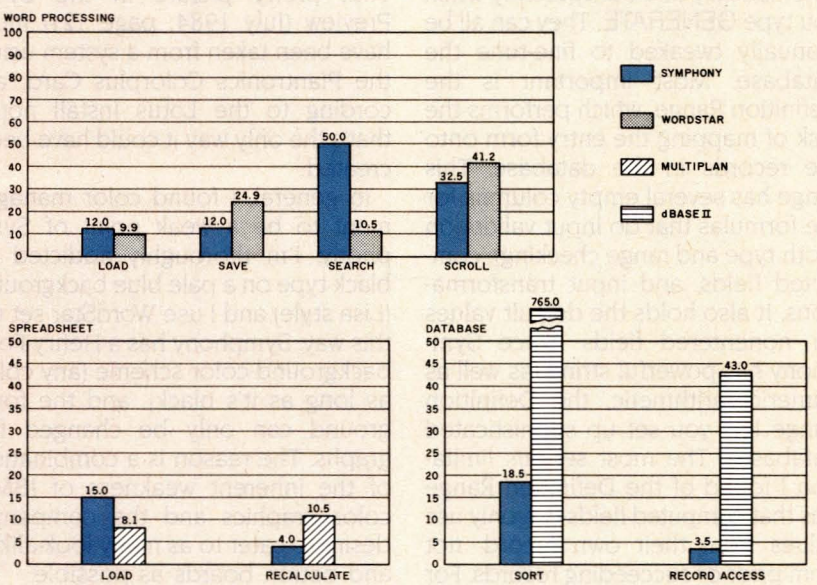

A comparison of Symphony with stand-alone packages specifically designed for word processing, spreadsheeting, and database management shows that Symphony performs well in all categories. Its very fast times compared to dBASE II in the Record Access test should be read with the knowledge that Symphony's records are indexed, while dBASE II's are not.

editing field contents can all be accomplished by the appropriate IBM control and cursor keys.

To perform a search and select operation, choose "Criteria" from the Form menu and then fill in the fields you want to match. Any of Symphony's @FUNCTIONS can be used in a criterion, as well as the ? and * wild-card characters. When you return from the menu, the database will appear to contain only those records that match the criteria. To get back to the whole database, choose IGNORE CRITERIA. Performing a sort operation on up to three keys is just as easy. Many Form windows can look at a single database, so some users could be given access to restricted subsets of the data (Symphony also provides locking with passwords). Novice users should find these facilities sufficient for all database operations. More experienced users can switch to a Sheet window to view the raw data.

Symphony has even more special ranges than 1-2-3, and it creates them automatically and transparently when you type GENERATE. They can all be manually tweaked to fine-tune the database. Most important is the Definition Range, which performs the task of mapping the entry form onto the records in the database. This range has several empty columns for the formulas that do input validation (both type and range checking), computed fields, and input transformations. It also holds the default values for nonentered fields. Since Symphony has powerful string (as well as numeric) arithmetic, the Definition Range lets you set up sophisticated databases. The most serious limitation I found of the Definition Range was that computed fields can only use values from their own record, not from prior or succeeding records. For example, you can't accumulate running totals. You'd have to use spreadsheet functions (e.g., @SUM) on a column instead.

The fact that all data has to be in RAM is more of a limitation for a database than it is for the word processor. Even so, a 512K-byte machine will hold 1700 records of 100 bytes—which will do for a price list, mailing list, or even stock control for a small business. Symphony's powerful range of statistical functions can be applied to databases, which should prove useful to analysts of all persuasions from the laboratory to Wall Street.

GRAPH

Symphony's graphing function is somewhat better than 1-2-3's. The most obvious difference between the two programs is that Symphony's graphs appear in Graph windows and are automatically scaled to fit. When you resize a window, the graph is redrawn at lightning speed before your eyes.

I was rather disappointed that I could not have color-graph windows on the same screen as text on my system, which includes the IBM Color Graphics Adapter and an IBM color monitor. The best I could manage was either monochrome graphs and text or a color display where I had to toggle between text and graphics mode. That pretty picture in the BYTE Preview (July 1984, page 121) must have been taken from a system using the Plantronics Colorplus Card; according to the Lotus Install notes that's the only way it could have been created.

In general, I found color management to be a weak point of Symphony. I'm thoroughly addicted to black type on a pale blue background (Lisa style) and I use WordStar set up this way. Symphony has a Henry Ford background color scheme (any color as long as it's black), and the foreground can only be changed for graphs. The reason is a combination of the inherent weakness of IBM's color graphics and the company's desire to cater to as many look-alikes and option boards as possible.

COMM

We Brits still live in the Stone Age as far as telecommunications go. I have a 300-bps (bits per second) coupler (and only a handful of bulletin boards to talk to), while auto-dial modems are about as common as domestic nuclear reactors.

With this proviso, the communications facility in Symphony looks fine to me. Creating a Comm window gives you a main menu. The main menu lets you alter all the communication parameters while you are on line, or load a settings sheet in which you've recorded all the parameters (including telephone numbers and log-on procedures) for a particular source. Symphony will dial numbers for you, perhaps from a database of stored numbers or from a macro program. It lets you prefix the number, if necessary, to get an outside line through a switchboard.

Text can be captured on the worksheet and then looked at via Sheet, Doc, or Form windows. Or you can send any of these types of data to a remote site, with highly flexible formatting options (such as data conversion from foreign character sets). If you're busy when a call comes in, you can switch to a Comm window to receive it without disrupting your work. You can have Symphony answer the phone, unattended if necessary. File transmission under the widely used Ward Christensen XMODEM protocol is built in, but no mainframe protocols are supported. These may be available later as applications. I could only use Symphony in a basic terminal-emulation role, calling a few local bulletin boards. It worked fine, capturing neatly formatted text when required.

MACROS AND COMMAND LANGUAGE

Lotus 1-2-3 has a simple form of programmability: it uses "keyboard macros," which are named collections of keystrokes (represented either as single-letter menu choices or names of special keys in braces) that are executed automatically when you invoke their name. In Symphony this facility has been enhanced to the point where it becomes a full programming language.

You can still use keyboard macros but now there is an automated way to produce them. Press the Learn function key to set Symphony in Learn

(continued)

MASTER THE NEW ELECTRONICS WITH McGRAW-HILL'S

Contemporary Electronics Series

The fast, easy and low cost way to meet the challenges of today's electronic innovations. A unique learning series that's as innovative as the circuitry it explains, as fascinating as the experiments you build and explore.

From digital logic to the latest 32-bit microprocessor, the McGraw-Hill Contemporary Electronics Series puts you into the electronic picture one easy step at a time. Fifteen unique Concept Modules, sent to you one every 4–6 weeks, give you a handle on subjects like optoelectronics, robotics, integrated circuits, lasers, fiber optics and more.

Each Concept Module goes right to the heart of the matter. You waste no time on extraneous material or outdated history. It's a fast, efficient, and lively learning experience...a non-traditional approach to the most modern of subject matter.

Unique Interactive Instruction

With each module, you receive a McGraw-Hill Action Audio Cassette. Each tape is a dynamic discussion that drives home the key facts about the subject. Your learning experience is reinforced through interaction with vividly illustrated text, audio cassettes, and actual electronic experiments. Indexed binders preserve backup material, notes, and tapes for convenient referral.

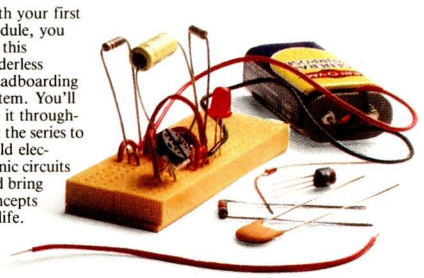

With your first module, you get this solderless breadboarding system. You'll use it throughout the series to build electronic circuits and bring concepts to life.

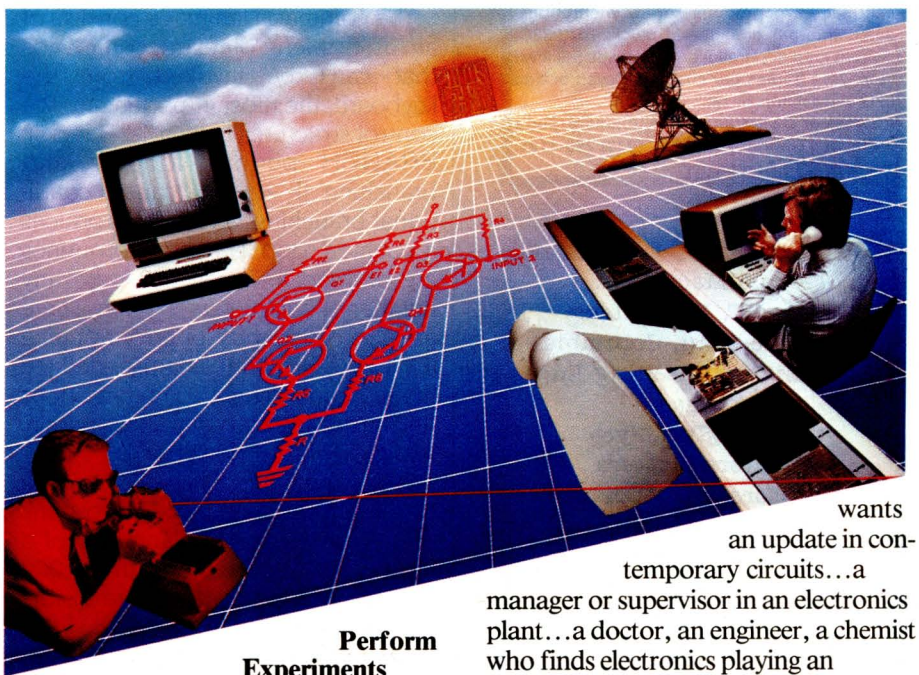

Perform Experiments in Contemporary Electronics

Throughout your series, laboratory experiments reinforce every significant point. This essential experience ...dynamic, hands-on demonstrations of theory in practice... will help you master principles that apply all the way up to tomorrow's latest VLSI (Very Large Scale Integrated) circuitry.



In your very first module, you'll use integrated circuits to build a digital oscillator, verifying its operation with a light emitting diode (LED). You'll learn to identify passive and active components, understand concepts common to all electronic circuits.

For Anyone Interested in Electronics

The Contemporary Electronics Series is designed for anyone from hobbyist to professional. It's for you if you're looking for new fields of interest...if you're a teacher who wants an update in contemporary circuits...a manager or supervisor in an electronics plant...a doctor, an engineer, a chemist who finds electronics playing an increasingly important role in your work. It's even for electronics engineers or technicians who feel their training needs freshening up. It's the quickest, most convenient, probably least expensive way to do it. And the only one that gives you hands-on experience.

15-Day No-Risk Trial

To order your first module without risk, send the postage-paid card today. Examine it for 15 days under the terms of the order form and see how the Contemporary Electronics Series gets you into today's electronics. If card has been used, write us for ordering information.

McGraw-Hill
Continuing Education Center
3939 Wisconsin Ave.
Washington, D.C. 20016



RS232C IBM PC Compatible
Paper Tape Transmitter/Model 612

Stops and starts on character at all speeds, uses manual control or X-on, X-off 90-260 volt, 50-60 Hz power. 50-9600 baud, up to 150 char/sec synchronous or asynchronous; gated internal or external clock, RS 232C, current loop or parallel output, reads 5-8 level tape, 7-11 frames per character, even or odd parity. Desk top or rack mount.

Addmaster Corporation, 415 Junipero Serra Drive, San Gabriel, CA 91776, (213) 285-1121, Telex 674770 Addmaster SGAB

Inquiry 8

Apple Macintosh
IBM, XT, Hard disks
Eagle, Compaq, Columbia
NCR, Olivetti, Leading Edge
Multiusers
up to 16/TermSyst.
Printers/Plotters
Monitors, Disk Drives
Modems, Diskettes
Software
for PC & Multiusers
Printers: Epson, Okidata
Gemini, Radix, NEC, HP

COMPUTER EXPO INC.
SOURCE COMPUTERS
(213) 208-0352 208-0259
(213) 906-1984 906-1634

Inquiry 75

Maxell Floppy Disks

The Mini-Disks with maximum quality.



Dealer inquiries invited. C.O.D's accepted. Call FREE (800) 235-4137.



PACIFIC EXCHANGES
100 Foothill Blvd., San Luis San Luis Obispo. CA 93401. In Cal. call (800) 592-5935 or (805)543-1037.

Inquiry 268

mode, so that it captures and records all the keys you press. Step through a sequence of operations in Learn mode and the commands will appear in the range you've allocated to the macro.

The command language consists of an assortment of extra commands that can't be invoked from the keyboard; the most important are the control structures (which 1-2-3 lacks). BRANCH permits looping and branching, IF <test> causes conditional branching, and FOR produces a counted loop. Named subroutines are allowed and you can pass any number of parameters to them. There are also commands for error trapping (ONERROR), controlling user-defined menus, controlling a communications link (including auto-dial links), and interaction with the keyboard.

Programming in *Symphonese* takes a bit of getting used to. I like to think of it as the assembly language of a huge and weird chip with 53,000 registers whose contents are visible on the screen.

Because of the evaluation rules of the spreadsheet there are lots of things you can't do (like compute cell addresses for indexed addressing) but you'll usually find a @FUNCTION that will get you out of trouble.

Purely as a demonstration, I managed to get the Sieve of Eratosthenes to run (albeit slowly) and listing 1 shows you that it's readable code. Holding variables in named, single-cell ranges, instead of absolute cell addresses, makes the program read better, but more important, this makes the program relocatable. The @NOW function reads the system clock; Symphony has a comprehensive set of functions for dealing with real-time dates and intervals.

APPLICATIONS

Symphony can be expanded with command extensions (called Applications) supplied as disk files. These are "attached" or "detached" through the services menu, and they add new options to Symphony's menus. The only Application that comes with the program is one that lets you exit to the disk operating system and run various housekeeping programs before returning to Symphony. It works if you remember to copy COMMAND.COM onto your Help disk.

PERFORMANCE AND OTHER MATTERS

I ran the BYTE benchmarks (see the "At a Glance" page) and the results

(continued)

Listing 1: *The Sieve of Eratosthenes in* Symphonese. *Note that the time shown is for only one iteration.*

```
                {LET start,@NOW}                    1899  count
                {LET count,0}                       8191  i
                {LET A1,1}                         24570  k
fill array      {MENU}CA1 . . A1 ~ A1 . . A8191 ~  16381  prime
1 iteration     {FOR i,0,8190,1,do-sieve}       30910.93  start
                {LET finish,@NOW}               30910.95  finish

do-sieve        {IF @INDEX (flags,0,i)}{kill-multiples}

kill-multiples  {LET prime,i + i + 3}
                {LET k,i + prime}
loop            {IF +k>8190}{LET count,count + 1}{RETURN}
                {PUT flags,0,k,0}
                {LET k,k + prime}
                {BRANCH loop}
```

Execution time: 38 minutes 32 seconds

Free Storage!



A radical $\sqrt{9}=3$ offer in extra length High Density Data Cartridges.

DEI® now offers you the perfect formula for data storage with our new nine pack configuration. And to make this an absolute value; with the **purchase of each nine cartridges we'll include a durable and practical storage container.** First, you'll have the finest high density cartridge that money can buy. Second, our extra length 5 fifty 5' cartridges have 23% more high density storage capacity at 6400 and 10,000 ftpi. And finally, our three separate shrink wrap packages will allow you to maximize your department inventory and provide flexibility when working with small quantities. This is, of course, a limited offer, so call your nearest listed DEI distributor today. When it comes to ¼" technology... DEI® has the answers!

® DATA ELECTRONICS, INC.

10150 Sorrento Valley Road ■ San Diego, CA 92121-1699

DEI and DEI are registered trademarks of Data Electronics, Inc.

Authorized Regional DEI Resale Locations:

EASTERN: ABCO, OH (614) 876-1292 ■ Acknowledge, Inc., MA (617) 620-8843 ■ COMARK, IL (312) 941-2676 ■ Crown Computer Products, NY (518) 438-0600 ■ Data Print, NC (704) 535-0296 ■ Data Research, NJ (201) 569-2620 ■ Datron Computer Products, NY (716) 328-8390 ■ EDP Supply, NH (603) 893-6118 ■ Eastern Data Products, NJ (201) 225-7300 ■ Global Computer Supplies, NY (516) 485-1000 ■ Manchester Equipment, NY (516) 435-1199 ■ Midwest Computer Supplies, IL (312) 231-1112 ■ MISCO, NJ (201) 264-8200 ■ Nashua Plus, NH (603) 880-2323 ■ Paragram Sales, VA (703) 356-0808 ■ Time Brokers of N.E., MA (617) 769-4060 ■ Word Systems, Inc., VA (703) 620-0300

SOUTHWESTERN: Bluebird Systems, CA (619) 438-2220 ■ Challenge Computer, CA (415) 785-1300 ■ Computer Media Products, CA (619) 565-7802 ■ Computer Ribbons, CO (303) 295-0851 ■ Data Documents, CA (818) 965-3323 ■ Data Equipment Supplies, CA (213) 923-9361 ■ DatasLink Business Systems, Inc., CO (303) 694-2116 ■ Devoke Company, CA (408) 980-1366 ■ I.D.E.A., CA (408) 745-1911 ■ International Memory Products, CA (213) 450-0132 ■ Kalleen's Inc., CA (415) 459-5382 ■ L.H. & Associates, CA (213) 543-5068

SOUTHERN: Advanced Computer Products, TX (206) 527-4300 ■ American Computer Supply, TX (214) 243-3232 ■ Automated Computer Systems, FL (305) 594-3819 ■ Business Data Products, Inc., TX (512) 453-5129 ■ Data Systems Supply, TX (713) 680-9353 ■ National Information Products, Inc., TX (713) 956-2121 ■ Shared Business, Inc., GA (404) 355-6632 ■ Stannard Computer Systems, TX (214) 423-7553

NORTHWESTERN: Indel-Davis, OK (918) 587-2151 ■ PCI Management Systems, KS (316) 722-0975 ■ Spencer Systems, KS (913) 268-5244 ■ Western Paper Company, WA (206) 251-5300

Inquiry 96 for Dealers. Inquiry 97 for End-Users.

PC EXPANSIONS

Qume 142A	$199
Teac FD55B	$149
Tandon TM100-2	$179
Tandon TM101-4	$295
CDC 9409	$179
Amdek AmdiskV	$119
Case and PS	$ 45
Maynard Disk Controller	$114
Sandstar Series	$ call
Internal 10MB HD systems: WS1	$899
WS2	$1079
Quadboard (64K)	$259
Quadboard (384K)	$419
Quadcolor I	$199
AST SixPakPlus (64K)	$259
SixPakPlus (384K)	$419
MegaPlus(64K)	$269
I/O Plus	$129
AST-3780	$659
PCnet - starter kit	$809
MonoGraphPlus-S	$389
HERCULES graphics board	$349
HAYES Modems: 300	$209
Smartmodem 1200	$489
Smartmodem 1200B	$419
Set of 9 chips (64K)	$ 32
256K chips (each)	$ 23
8087 chip	$169
Verbatim Datalife DS, DD (20)	$ 49

VLM Computer Electronics
10 Park Place • Morristown, NJ 07960
(201) 267-3268 Visa, MC, Check or COD.

TAX PAK©
INTEGRATED TAX PROGRAM WITH:

Forms		Schedules	
1040	Tax Return	A	Itemized Deductions
1040A	Short Form	B	Interest & Dividends
2106	Employee Bus. Exp.	C	Business Profit or Loss
2119	Sale of Residence	D	Capital Gains
2441	Child Care	E	Supplemental Income
3468	Investment Credit	G	Income Averaging
3903	Moving Expense	SE	Self Employment
4562	Depreciation	W	Married Cpl. Both Work
4684	Casualties & Thefts		
5696	Energy Credit		

Formats: 8" CPM 2.2 IBM 3740 IBM PC-DOS
Suitable for multiple clients or evaluating alternate filing strategies. Produces transcribeable IRS forms. **$33.**
For 1985 edition, return 1984 serialized disk and $27.
CANDELARIA WORKS
3955 Club Dr. Atlanta, GA 30319
404/266-8759
To order call toll-free
800-621-5839
Visa/MasterCard accepted

Inquiry 50

For the **SANYO** MBC 555
LPR Bookkeeper
Accounts Receivable, Accounts Payable, General Ledger and Inventory.
Invoicing, auto bill, finance charges statements, checks, auto interface and more. 160Kb, 320Kb, or XT.
Single Program $150
Tri-Pak $375 AP, AR, GL **Quad-Pak $475** AP, AR, GL, INV
Also available in MS/PC-DOS & CP/M
Dealer inquiries invited
(505) 326-5833
LA PLATA RESEARCH
3001 Northridge Dr. "D"
P.O. Box 10612, Farmington, NM 87499

Inquiry 196

compare well with other market-leading packages.

My most serious criticism of Symphony concerns memory management. Symphony requires 320K bytes of RAM to run and showed 218,240 bytes of free workspace on my 512K-byte system. This allows a maximum 255- by 211-cell spreadsheet (53,805 cells), which is large enough for most users. However, like 1-2-3, Symphony uses a fairly naive memory-allocation scheme, so for example, if you add a single number to the extreme bottom right cell (IV8192) of an otherwise empty sheet, it will respond with a "memory full" error.

This is irritating, but there is a more serious problem with garbage collection. When I ran the Sieve program, it created a column of 8190 flags, which uses a lot of free memory. When I erased this column, Symphony didn't take back this space. Storing worksheets on magnetic media when they contain huge amounts of "phantom" data can eat up disk space by filling it full of blanks.

To optimize disk use I had to selectively store the program code (using XTRACT), then reload it and store the whole sheet (with all free space now reclaimed). This means that you have to *think* seriously about memory use if you are using far-flung corners of the sheet, and you will probably have to move some things around.

In a sophisticated program such as this I would have liked to see fully automatic memory optimization and garbage collection using sparse matrix methods.

Documentation

The only complaint you could have about Symphony's documentation is that there's too much of it. As was the case with 1-2-3, the manuals are beautifully produced, fully indexed, clearly written, and comprehensive. There are two huge main manuals (*How-To Manual* and *Reference Manual*), a *Glossary*, a *Quick Reference Guide*, and an *Introduction* booklet that has installation guidance. I found the volume of information overwhelming, and the frequent cross-references between the two main books were disconcerting. The on-line help is so good that previous 1-2-3 users will not have to use the documentation often. And I must say that I feel slightly churlish for complaining about too much documentation in an industry where too little information is a far more common problem than too much. Symphony does a lot of things, hence it needs a lot of documentation.

Conclusions

It would have been easy for Lotus to foul up after a winner like 1-2-3. The company didn't. Symphony provides real and rational advances over 1-2-3 and manages to improve on the already excellent ergonomics of that program. The upgrade from 1-2-3 is a good value for the money *if* you need the extra functions.

I've heard some muttering that Symphony is too complicated. This is not true. The problem is that the program does so much that a user is tempted to try too much too fast. Sensibly approached, every part of Symphony is as easy as 1-2-3. The tutorial program is good; it gets you using all the parts in a simple ways quickly. The beauty of Symphony's design is that all the more advanced features are optional, and you can work up to them as you gain confidence.

For a certain class of user, particularly business managers and executives, Symphony really might be the only program they need to buy. To get the most out of it though, they'll need about 512K bytes of RAM and, preferably, a hard disk.

The various kinds of data-view can be combined with the new command language in so many ways that it's fruitless to speculate about what you could possibly "do" with Symphony. Merely thinking about the communications facility combined with a real-time clock and macro programs gives me a score of exciting ideas.

I can't shake off the feeling that Symphony deserves a more powerful host than the IBM PC. Many of the criticisms I've made reflect as much on the limitations of that machine as on the program. ■

You've probably already outgrown your personal computer.

Introducing the TeleVideo Personal Mini. Your simplest PC growth path.

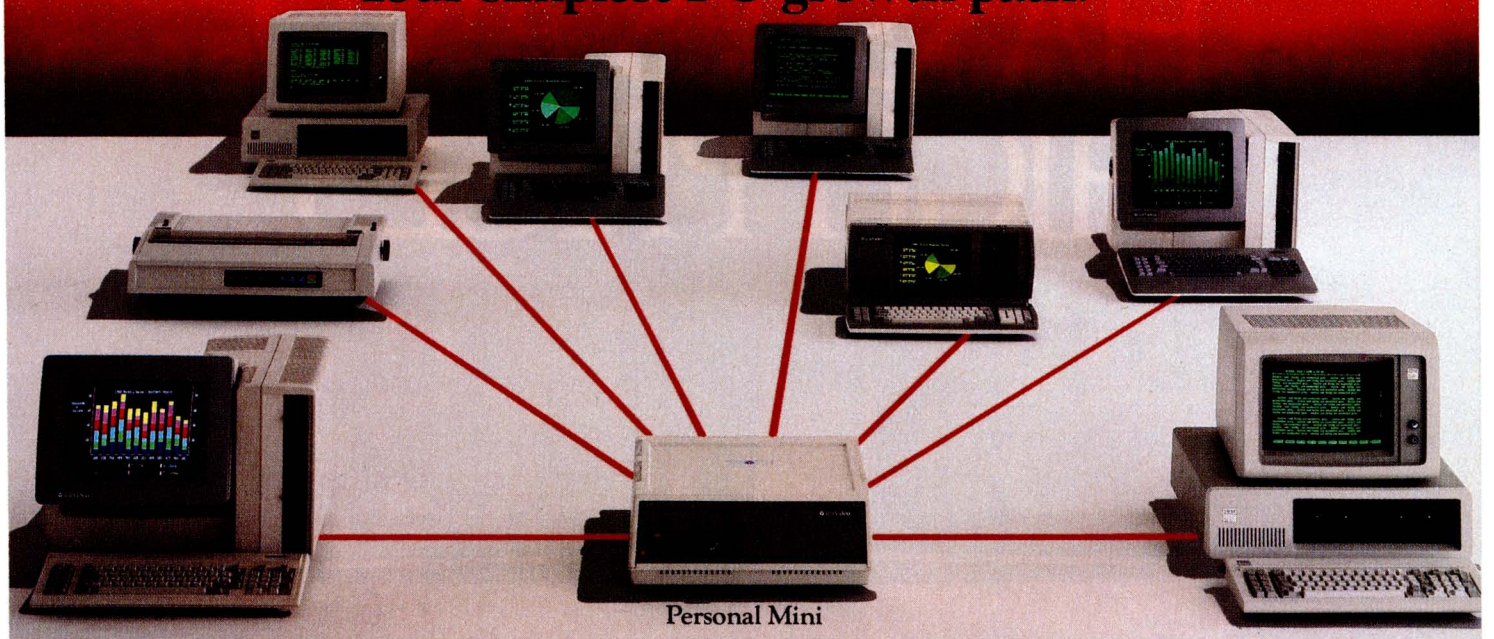

Personal Mini

You'll know you've outgrown your personal computer the first time you realize it won't let people share resources or work on the same job simultaneously.

The fact is, the isolated, standalone PC is only the beginning of how computers can meet today's business needs.

The fact is, your next step to growth is the new TeleVideo® Personal Mini.™ Simply plug it in and grow.

Runs PC, mini and multiuser software.

With the TeleVideo Personal Mini, users of IBM® or TeleVideo PCs, XTs, and portable computers can share data and expensive peripherals like printers and plotters.

The Personal Mini dramatically increases computing power. So it not only runs PC software, but also hundreds of popular, fast minicomputer and multiuser software programs in your established PC environment.

And, unlike less advanced networks, the Personal Mini never sacrifices performance or speed regardless of how many workstations are on line. It also offers multitasking.

Enhance your original PC investment.

Even system expansion costs are substantially less than what you'd pay to add new IBM PCs. And your original investment in hardware, software and personal computer education is never lost.

Your TeleVideo dealer now has the Personal Mini. Arrange to see it today by calling toll free, **800-521-4897.** In California, call **800-821-3774.** Ask for operator 10.

This is the first PC compatible multiuser, multitasking system. And the computer solution you'll never outgrow.

Regional Sales Offices: Northwest (408) 745-7760, Southwest (714) 476-0244, Southcentral (214) 258-6776, Midwest (312) 397-5400, Southeast (404) 447-1231, Mid-Atlantic (703) 556-7764, Northeast (617) 890-3282, East (516) 496-4777, Rocky Mountain (408) 745-7760.

IBM is a registered trademark of International Business Machines.

TeleVideo Computers

TeleVideo Systems, Inc.

The TeleVideo Personal Mini. The first PC compatible multiuser system.

CITIZENS AGAINST UGLINESS, UNRELIABILITY, HASSLES AND HIGH PRICES.





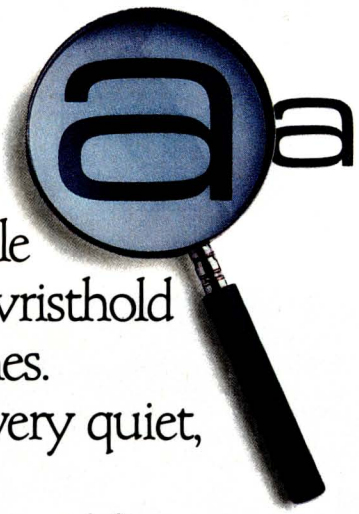

Introducing the Citizens. A whole new line of dot matrix printers, precision-engineered by the people who've become a wristhold word in fine, precision-engineered watches.

The Citizens are very sleek, very quiet, and reliable as the day is long.

They're IBM® or Epson®-compatible, with output speeds of 160 cps, or 40 cps correspondence-quality at the flick of a switch.



They're also exceptionally easy to use, thanks to our unique new push-feed paper loading system.

And if all this weren't enough to tick off the competition, wait 'til you see what a value Citizen™ is for the money.



Stop by one of our dealers today and watch what the Citizens can do for you.

For more information, call 1-800-556-1234, Ext. 34. In California, 1-800-441-2345, Ext. 34. Or write Citizen America Corporation, 2425 Colorado Avenue, Santa Monica, CA 90404.

CITIZEN

© 1984 Citizen America Corporation. Citizen is a trademark of Citizen America Corporation. IBM is a registered trademark of International Business Machines Corporation. Epson is a registered trademark of Epson Corporation.

Give IBM a piece of your mind.

```
+ 1984 Comedian's Convention
  – Location
  – Jokes about teenage children
  – Travel arrangements?
  – Invitations, coffee and donuts
  – New jokes about spouses
  – Get budget approval
  – Workshop: where to buy apparel wholesale
  – Jokes about new television programs
```

Inspiration is fleeting, so just let your thoughts flow. The flexible format makes it easy to rearrange them later into headings and a basic outline.

```
+ 1984 Comedian's Convention
  + Location
    – Wonderama Resort Spa & Carwash
  + Travel Arrangements
    + Arrange air charter through travel agent
      + Lotsa Luck Travel Service, Las Vegas
        – Ida Mistit, agent
  + Agenda
    + Day 1
      + Workshops
        + new jokes about
          – your spouse
          – your neighbor
```

Use as many headings and as much text as you need to develop the outline fully. ThinkTank's processing power can move whole sections of text with a single keystroke—something no word processor can do.

```
+ 1984 Comedian's Convention
  + Location
    – Wonderama Resort Spa & Carwash
  + Travel Arrangements
    – Arrange air charter through travel agent
  + Agenda
    – Day 1
    – Day 2
  + Budget
    – Submit proposal by August 15
  + Publicity
    – Invitations
  + Room Reservations
    – 85 rooms, double occupancy
```

When you want to scope the Big Picture, a simple command drops out everything but the main headings. Subheads and detailed text are stored for recall later.

Go ahead.

Put your two cents worth onto ThinkTank.™ And watch it grow into a million-dollar idea.

Because ThinkTank is the first software designed to process ideas. Available on the IBM PC and IBM compatible machines.

ThinkTank's flexible outline format lets you clearly see your idea from all angles. So you can sharpen up an inspired thought, weed out a weak one, set priorities, weigh alternatives.

It's like a spreadsheet for ideas.

While all this structuring helps your brainchild take shape, it won't inhibit the natural flow of creative juices. Because entering an idea onto ThinkTank is as easy as scribbling it on a cocktail napkin. All you need is simple English.

Just let your thoughts flow—from "pie in the sky" concepts to the "nuts and bolts" details. And build more professional proposals, marketing plans, legal briefs, case reports, engineering specifications, research notes, action items, hot lists and to-do lists.

Call 1-800-556-1234 Ext. 213 (in Calif., 1-800-441-2345 Ext. 213) for the store nearest you. And see what's really on your mind.



The First Idea Processor.

"ThinkTank" and "The First Idea Processor" are trademarks of Living Videotext, Inc.
© Copyright 1984, Living Videotext, Inc., 2432 Charleston Road, Mountain View, CA 94043, (415) 964-6300

Inquiry 205

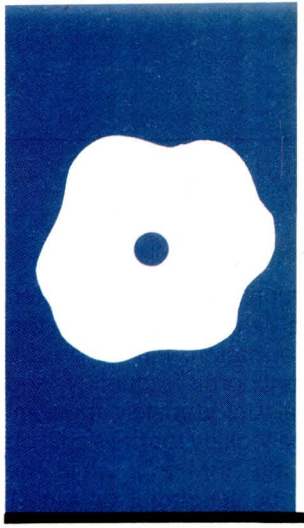

MagicPrint

A print processor with true proportional spacing

BY ALAN R. MILLER

The difference in print quality between professionally typeset documents and documents produced by most personal computer word processors and standard printers is vast, but three new programs from Computer EdiType Systems are helping to bridge that gap. The first, MagicPrint, which sells for $195, allows you to print documents with true proportional spacing by using microjustification. MagicBind ($250) does all that MagicPrint can do, plus boilerplate insertions and mail-merging. And MagicIndex ($295) has all of MagicBind's capabilities with additional features for creating indexes and tables of contents. Available for any computer running CP/M, CP/M-86, or MS-DOS, these programs can work with WordStar and most other word processors.

Note that none of these programs are word processors. Word processing consists of two separate steps—editing and printing. You create and alter text with an editor program. Then the resulting document is printed out with the word processor or with a separate print-processing program.

You may have to format the text before it is printed. For example, you may want the right margin to be justified or the text to be double-spaced. The document can be formatted either when it is created or when it is printed.

The WordStar word processor formats the document as you compose it. What you see on the video screen is approximately what you get when the document is printed. This feature is especially convenient if you want to see how the result will look or where the pages begin and end. With other word processors, such as PeachText, you use an editor program to create the document and a separate print-processor program to format and print it. With this latter method, the document is composed in a free form, unrelated to the finished appearance. Then the document is re-formed during the printing step. MagicPrint is a print processor that does more than print formatting. But before considering MagicPrint, let's look at several ways that text can be printed.

PRINTING ALTERNATIVES

Typewriters and some computer printers print each letter with a constant spacing or pitch. Ten letters per inch is common, although 12 pitch is also used. With this system, letters from each row line up vertically with those in adjacent rows (see figure 1). Justification of the right margin is obtained by adding extra spaces between words, but the blank spaces are prominent.

Daisy-wheel printers can position characters to the nearest 1/128 of an inch. As a result, the pitch can be set at any desired value. Taking advantage of this capability, WordStar introduced the concept of microjustification, another method for spacing characters during printing. With this technique, right justification is obtained by adding spaces between letters as well as between words. Letters in adjacent lines do not line up vertically. The distance between letters can change from line to line, but for any one line the pitch is constant. This method is sometimes incorrectly called proportional spacing. Microjustification (see figure 2) is an improvement over fixed pitch because the gaps between words are smaller. However, an even better output is possible if each letter is assigned its own size.

If you look carefully at the text on this page, you can see that letters have different widths; some letters, such as M and W, are wide, and others, such as i and j, are narrow. Unfortunately, word-processing programs are generally designed to print at a fixed pitch. Consequently, the characters on standard print wheels have a nearly constant width; that is, the character set has been distorted. The M and W are unnaturally skinny and the letter i is wide. Fortunately, it is possible to obtain print wheels with proportionally spaced characters, where the characters M and W are wide and i and j

(continued)

Alan R. Miller is a professor at New Mexico Institute of Mining and Technology (Socorro, NM 87801) where he has taught materials science, thermodynamics, electrical engineering, and programming methods since 1967. He holds a Ph.D. in engineering from the University of California at Berkeley, and he was written six books about computer languages and operating systems.

are narrow. These wheels have the symbol PS on them to indicate that the letters have proportional spacing. Such a print wheel should not be used for constant-pitch printing because the wide letters will overlap.

MagicPrint is designed to use a PS print wheel to produce true proportional spacing during printing. Each letter is assigned its own width with a print table. Although a document is prepared with a text editor in the usual way, the result is printed out using MagicPrint.

MagicPrint can be programmed for a standard 10-pitch print wheel. However, the results are not a great improvement over microjustification (see figure 3). The problem is that each character of the standard print wheel has about the same width. To fully use the capabilities of MagicPrint, you can program a PS for every letter so that each character is assigned its natural width. The results are now much improved (see figure 4) and are comparable to typeset text.

INSTALLATION

MagicPrint must be configured before it is used for the first time. First, you must choose between one of two separate versions of MagicPrint. One version is compatible with the WordStar embedded commands. The other is for editors such as Electric Pencil, PeachText, Mince, P/Mate, Select, and Word Master.

The installation program alters MagicPrint for your brand of printer and its method of handshaking. Indicating the type of printer is straightforward; just choose the appropriate number from a list given on the screen. Selecting the method of handshaking is more complicated.

A printer can receive data from a computer faster than it can be printed. The printer places the data into its buffer until it can be used. However, if the buffer becomes full, the printer must signal the computer to stop sending data, either by software or by hardware. One method of software handshaking is known as XON/XOFF, completed by sending the common Control-Q Control-S pair. Another method, called ETX/ACK, uses Control-C Control-F.

An alternate approach uses hardware handshaking. When the buffer is full, the printer changes the voltage on a wire running to the computer, which signals the computer to stop sending information. Pin 20 on the RS-232C serial port is frequently used for this signal. Unfortunately, the computer may be looking for the signal on pin 6 (e.g., the IBM PC), while the printer may be sending it on pin 11 or pin 19. Thus, when you run the installation program, specifying the handshaking method is important.

CHARACTER WIDTH TABLE

MagicPrint performs proportional spacing by referencing a built-in table of character widths. Initially, this table is configured for the Diablo Bold PS print wheel. If you have a different print wheel, you may want to alter the character table to match. If you have several different wheels, using a separate version of MagicPrint for each wheel may be best. The character table, located near the beginning of the program, can be changed with a debugger program.

To customize MagicPrint, I printed every character for each of my three print wheels (standard 10 pitch, proportional spacing, and script). Then placing a plastic print-shop typeset-

The first sentence is the same for all figures. This figure is an example of text printed with a fixed pitch for Figure 1. Each letter is separated from the next by the same amount and is the same from one line to the next.

Figure 1: *An example of fixed-pitch printing.*

The first sentence is the same for all figures. This figure is an example of text printed with microjustification for Figure 2. The distance from letter to letter is constant for each line but varies from one line to the next.

Figure 2: *Microjustified printing.*

The first sentence is the same for all figures. This figure is an example of text printed with proportional spacing for Figure 3. Each letter has its own width, but the characters are all about the same width.

Figure 3: *Proportionally spaced printing with fixed-width letters.*

The first sentence is the same for all figures. This figure is an example of text printed with proportional spacing for Figure 4. Each letter has its own width, and the characters have their natural widths.

Figure 4: *Proportional spacing with natural-width letters.*

ting overlay on the printouts, I determined the width for every character. The values for the characters for each print wheel were entered into separate versions of MagicPrint using the system debugger.

If you are using the CP/M version (as I did with the North Star Horizon), load MagicPrint into memory with DDT or SID. Dump memory starting at location 200 hexadecimal. You will see the lowercase letters, the uppercase letters, and then the special characters in the ASCII (American Standard Code for Information Interchange) representation on the right side of the screen. The width of each character is given immediately following the corresponding character. You can change the widths with the S command. You can also change the default-line length and character density at this time; the locations are 113 and 114 hexadecimal. Then return to CP/M and save the new version.

Dot Commands

Formatting commands are given to MagicPrint by one of two methods—dot commands or embedded commands. The dot commands begin with two dots starting at the beginning of a line. Several commands can be combined on a single line, but no regular text can appear on this line. The single-dot commands of WordStar are ignored by MagicPrint, and conversely, the double-dot commands of MagicPrint are ignored by WordStar.

The first line of a document typically contains dot commands for turning on the page-numbering function and for setting the line length and the character density. A heading to be printed at the top of each page can be placed next. This section can have its own formatting commands as distinct from the main part of the text; for instance, justification of the right margin can be turned off and the character density can be changed.

A heading to be centered by MagicPrint is not actually centered in the original text but is begun at the left margin. A dot command in the previous line directs MagicPrint to center the text during printing. The result is a considerable improvement over WordStar, which centers only to the nearest character. By contrast, MagicPrint centers each line precisely.

A flush-right command justifies a partial line with the right margin. This feature can be used to place a date on the right side of a letter. Two-column output is obtained by printing a narrow left column, rolling the platen backward with the B command, and offsetting the margin with the M command. Then the right column is printed. You can also use this method to make columns of data line up. Unfortunately, with proportional printing, each line has its own spacing and so columns will not line up normally. This is an inherent limitation of the proportional-printing method rather than of MagicPrint.

Embedded Commands

Unlike dot commands, which are placed on separate lines, the embedded commands appear directly in the text. For the WordStar version, all the WordStar embedded commands are used. These commands include underline, boldface, doublestrike, backspace, subscript, and superscript. By contrast, the standard version of MagicPrint uses a two-character sequence, the first being a left bracket.

Other WordStar-compatible commands are the non-break space and the soft hyphen. The non-break space is used in the middle of a character string (such as a date) to ensure that it will not be split over two lines. You can place a soft hyphen, a Control-underline sequence, in the middle of a long word. As with WordStar, MagicPrint looks for a soft hyphen to break a long word at the end of a line, but the soft hyphen is ignored if it is not needed.

Embedded commands peculiar to MagicPrint are the pitch change and footnote. Normally the pitch of an entire document is selected on the first line with a dot command. However, the pitch of any single letter or group of letters can be set by an embedded pitch command. A ligature, such as æ,

(continued)

AT A GLANCE

Name
MagicPrint

Manufacturer
Computer EdiType Systems
509 Cathedral Parkway
New York, NY 10025

Versions Available
Standard version for CP/M, CP/M-86, PC-DOS, or MS-DOS
WordStar version

Format
5¼- or 8-inch floppy disk

Minimum Hardware
Daisy-wheel printer
48K bytes of RAM

Documentation
50-page manual

Price

MagicPrint	$195
MagicBind	$250
MagicIndex	$295

Audience
Anyone who uses a daisy-wheel printer



This ad is for all those who ever wonder why your company runs a United Way campaign.

When it comes right down to it, you're probably the best reason your company has for getting involved with the United Way.

You see, they know almost all of the money given to the United Way goes back out into the community to help people.

So if you, or the people you work with, should ever need any of our services, like day care, family counseling or health care, we'll be right there to help. In fact, there are tens of thousands of United Way-supported programs and services in cities and towns across the country. That means help is nearby wherever you are.

And your company knows that could mean the difference between keeping or losing a valuable employee.

That's why they give. And that's why they ask you to give. Because there may come a day when you need help yourself.

United Way
Thanks to you, it works, for ALL OF US.

Ad Council A Public Service of This Magazine & The Advertising Council

MagicPrint will move the footnote from the text and put it at the bottom of the page.

can be produced by this means.

The embedded command for footnotes is a useful feature that lets you first place a footnote directly in the text at the point of reference as you are creating the document. Then MagicPrint will move the footnote from the text and put it at the bottom of the page. The footnote text can be separately formatted, like the heading, so that you can shorten the line length or tighten the character pitch, for example. One drawback is that the footnotes are not automatically numbered.

File Merging and Indexing

Text such as boilerplate material and resumes may be frequently needed in reports. However, it is not necessary to actually incorporate this material into each report. With the MagicBind program, you need only indicate at the proper point of the main document that an auxiliary file is to be inserted during printing. The MagicBind program can also perform all of the MagicPrint tasks. (Like MagicPrint, both a standard version and a WordStar version are available.) And of course MagicBind prints with proportional spacing.

MagicBind can also print a set of personalized form letters, each addressed to a different person. Furthermore, each letter is individually formatted so that extra spaces do not appear after short names.

MagicIndex, the third program from Computer EdiType Systems, includes all the features of MagicBind. In addition, it can generate an alphabetical index of selected words in a document with their corresponding page numbers. MagicIndex can also create a table of contents.

Single words or groups of words in your text can be selected for indexing by surrounding them with one of several special symbols. These selected index words are regular words in the text and not separate entries that have to be specially typed in.

You can opt for any of several categories of index entry. Generally, the selected words will appear both in the printed text and in the index. However, the selected words need not necessarily be taken from the printed text, and they will only appear in the index. It is also possible to change the case between the printed version and the index version. Special provisions are made for marking "see also" entries. Of course, text marked for indexing appears strange when viewed on the video screen because of the special indexing symbols.

Problems and Counters

MagicPrint can produce a better-looking printout than WordStar. However, what you see on the screen when creating a file with WordStar is not what you get when the file is printed with MagicPrint. Headings are not centered, page breaks are wrong, and text is not justified. Nevertheless, you can give MagicPrint a keyboard command to display your file on the video screen. Page breaks are then correctly shown but the text is not justified.

MagicPrint is initially configured for the Diablo Bold PS print wheel. However, changing the built-in table to match your particular print wheel is relatively easy if you are a systems programmer but can be difficult for others.

Praiseworthy

MagicPrint is ideal for producing finished documents that require a typeset appearance. As an example, editors of a newsletter could use a word processor and a letter-quality printer to produce camera-ready material. If the look of your printed material is important, then MagicPrint is a superb product. ■

Inquiry 285 ⟶

Best Connection



ProModem™ 1200A Apple Card Pack

It's the best 300/1200 baud 212A telephone modem for your Apple® II, II+, and IIe. "Best" because it's the easiest to install and use, provides more useful modem features for your money, and lets you add software capabilities as your needs grow.

We really do mean easy. Just plug the ProModem Card Pack into any expansion slot and connect the telephone cord. On-board intelligent software in ROM includes a simple but powerful terminal program. With a few keystrokes, you'll be "on line" and communicating.

ProModem 1200A offers you the best price-to-performance modem available with Auto-Answer and Auto-Dial, Programmable Intelligent Dialing, Built-in Speaker with Volume Control, Help Commands, Extensive Diagnostics, and more.

And when you need more sophisticated capabilities like Terminal Emulation, you're all set.

The 1200A is fully Hayes compatible. You'll be able to use most of the Apple II communications programs available.

PRICE COMPARISON

PROMETHEUS

(1) ProModem 1200A Apple Card Pack, complete with on-board software and all necessary hardware
List Price: $449

HAYES

(1) Smartmodem 1200 "standalone modem"
(2) Serial Card
(3) RS-232C Cable
(4) Communications Software
Total List Price: $957

Apple is a registered trademark of Apple Computer, Inc

The "Help" Screen and "Auto redial if busy" functions make the 1200A convenient to use. The second phone jack for the telephone handset allows switching from voice to data. You get all of this, ready to use, complete with easy to understand documentation, and a telephone cord for only $449.

See your local dealer for a demonstration. He'll show why ProModem 1200A is your best connection.

Prometheus Products, Inc.
45277 Fremont Blvd.
Fremont, CA 94538
(415) 490-2370



PROMETHEUS®

One computer under $1000 can run all these programs. And fly you into Chicago on a windy day.



The IBM PC*jr* can run so many programs, chances are you'll never find yourself up in the air.

Unless that's where you'd like to be.

More computer for your money.

See how PC*jr* compares with other computers at its price.

Memory
User Memory (RAM): 128KB (expandable to 512KB)
Permanent Memory (ROM): 64KB

Diskette Drive
Double-sided, double density
Capacity: 360KB

Processor
16-bit 8088

Keyboard
Typewriter-style
Detached; cordless

Warranty
1-year limited warranty

Software
Runs over 1,000 programs written for the IBM PC
Runs both diskette and cartridge programs

Display
40- and 80-column
Resolution:
4-color: 640h x 200v
16-color: 320h x 200v

Expandability
Open architecture
Optional 128KB Memory Expansion Attachment(s)
13 ports for add-ons, including built-in serial interface

You can use a PC*jr* to pilot your own aircraft with Flight Simulator. Or handle a business with the powerful Lotus™ 1-2-3,™ in its new cartridge format. Or create full-color illustrations with the new PC*jr* ColorPaint.

The fact is, PC*jr* runs over a thousand of the most popular, current programs—many of them written for the IBM PC.

You can choose from over 50 programs to make writing a breeze.

Over 60 programs to help manage a home.

Over 200 programs to help manage an office.

Over 200 programs for entertainment.

Over 300 programs for education.

And a generous helping of programs to help you write your own programs.

And if you'd like more, the new optional PC*jr* Memory Expansion Attachment gives you the power to run over a thousand additional programs.

With PC*jr*, you have access to one of the fastest-growing, most up-to-date libraries of software in the world today. So no matter what you do, it's likely that there's a program to help you do it better.

Whether it's flying through spreadsheets or flying through a 30-knot headwind.

Touch down at an authorized IBM PC*jr* dealer or IBM Product Center and take a look at PC*jr*—now priced at less than $1,000,* monitor not included.

For the store nearest you, call 1-800-IBM-PCJR. In Alaska and Hawaii, call 1-800-447-0890. IBM®

Inquiry 168

IBM PC*jr*

Growing by leaps and bounds.



With Flight Simulator, you can practice your flying in Chicago or 89 other places. With or without the wind.

Lotus and 1-2-3 are trademarks of Lotus Development Corporation.
*IBM Product Center price, monitor not included.
Little Tramp character licensed by Bubbles Inc., s.a.

We Set the Standard in Prices!

For IBM PC Add-On Products. Superior quality products and services at lowest prices.

Look at what we have to offer, before you buy any add-on products for your IBM PC.

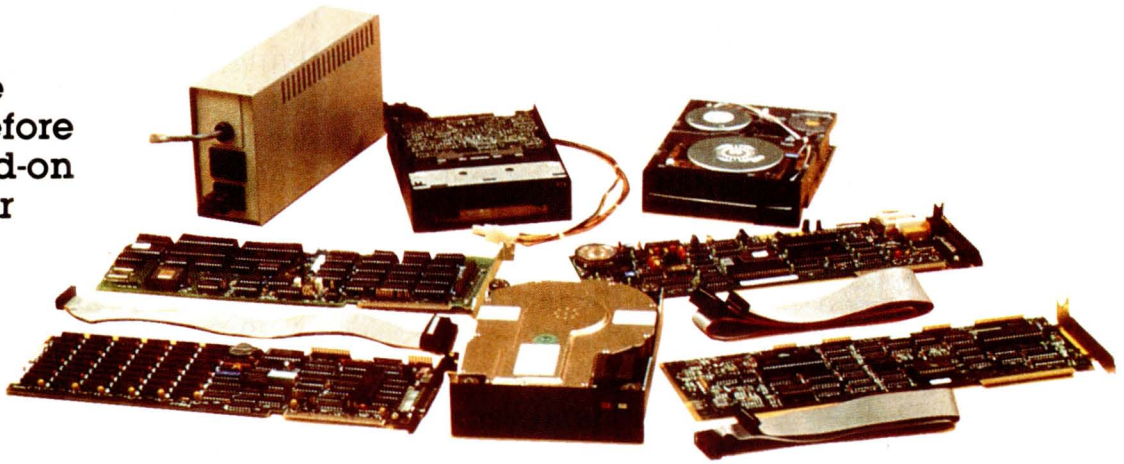

QIC-01. 10 MB internal hard disk. **$725.**

Our half-height 10 MB hard disk comes complete with controller, cables, drive and easy to follow instructions. It fits inside one of your floppy slots and draws same amount of current as a floppy. It is compatible with DOS 2.0, 2.1 and 3.0 without any patches. In fact, you can simply boot up from the hard disk. This is the same hard disk system you see advertised for hundreds of dollars more.

QIC-02. Streaming cassette tape back-up subsystem. **$777.**

Now, you can back-up your 10 MB of hard disk in less than 10 minutes. This half-height cassette tape system fits inside your IBM PC and is very easy to install. It comes with a controller card, cables, cassette drive, one cassette tape and all necessary software. You can perform image back-up as well as file by file back-up and restore.

QIC-03. 300/1200 baud internal modem. **$275.**

This auto dial/auto answer plug-in modem lets your PC talk to the world with reliable and easy operation. It is FCC certified, Bell 103/212 compatible as well as fully Hayes compatible. You can run all the popular communication programs as well as our superior QIC Com software program.

Our QIC-Com software program provides phone list management as well as powerful file transfer capabilities. You can even run any DOS programs such as WordStar concurrently without having to disconnect your line. Priced at $45.00, it is an offer you don't want to miss.

QIC-04. Half-height floppy drive. **$129.**

This half-height floppy is the quietest drive on the market. It draws the least amount of current and is compatible with your PC's floppy controller card. It's double sided, double density.

QIC-05. Five function card. **$199.** (64 K RAM Set $36.00).

Our five function card includes memory expansion from 0 to 384K, one serial port, one parallel port, one game port and one battery back-up clock calendar. RAM disk, print spooler and clock utilities are also included.

One Year Guarantee
No Risk. All our products are guaranteed for one year. And remember, if for any reason, you are not completely satisfied within 30 days, you can return it for a full refund. Check out our competition and find out which is best. We know better.

CALL US TODAY AT
408-942-8086

QIC RESEARCH INCORPORATED
528 Valley Way
Milpitas, CA 95035

Inquiry 290

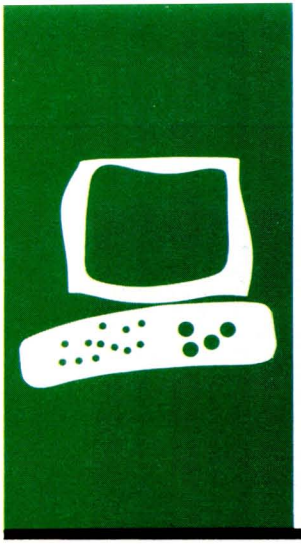

The Hewlett-Packard ThinkJet Printer

A compact, portable, and innovative printer

BY MARK HAAS

The ThinkJet printer is a lightweight ink-jet printer that comes in three "flavors": the HP 2225A, with an HPIB (Hewlett-Packard Interface Bus) IEEE-488 interface; the battery-powered HP 2225B, with an HPIL (Hewlett-Packard Interface Loop) interface; and the HP 2225C, with a Centronics-compatible interface for use with most non-Hewlett-Packard computers such as the IBM Personal Computer (PC) and Apple computers. The printers are identical in all other respects including the price of $495. Each printer is about 11 inches wide by 3½ inches high by 8 inches deep and weighs about 6½ pounds. The unit I tested, the HP 2225B, sat nicely on top of the 9114A disk drive I had already connected to the HP 110 portable computer. The ThinkJet features most of the things you'd expect in a printer, including several print pitches, bold and underlining, short line-seeking logic to position the print head, graphics, and reasonable speed. I was also impressed by the ease of setup and use.

SETTING IT UP

Before I could use the ThinkJet printer, I had to connect it to the HPIL, which is Hewlett-Packard's proprietary scheme for connecting computers and peripherals. Connecting any device to the HPIL is child's play because it's virtually impossible to connect the cables incorrectly. In some situations, however, you have to place a device in a certain position in the loop. This is the case when using the ThinkJet in a loop with both the HP 110 portable and the HP 150 desktop computers (using the Portable-Desktop Link): you must position the HP 150 before the ThinkJet printer and after the HP 9114A portable disk drive. The owner's guide that comes with the Portable-Desktop Link provides more details.

Regardless of which interface you have, the next step is to insert the print-head cartridge, which comes in a metal container not unlike those used for salad dressing on the airlines. You remove the thin foil top by peeling it back to reveal the cartridge and a small piece of blotting paper called an absorber. First, you insert the absorber in a small metal clip at the left end of the carriage. The absorber catches the initial spurt of ink the printer makes when first turned on. You then drop the cartridge into the print-head carriage and close the retaining latch by lifting upward. The manual says the latch will snap shut. Mine did not snap, though it was closed firmly. If anything, it seemed to snap when opening the latch.

The cartridge itself is quite amazing. Cylindrical in shape and just over an inch long, the clear plastic cartridge houses a plastic sack containing the ink supply and a solid-state device that squirts the drops of ink. Actually, it's an array of squirters stacked 12 high. Electrical paths lead from each squirter down the front of the cartridge to small contact points. When the cartridge is installed, these contacts connect with matching contacts on the carriage assembly. Changing the cartridge, therefore, not only replenishes the ink supply but also replaces the entire print-head mechanism—for only $7.95. Each cartridge is good for about 500 pages of text and has an expiration date.

Choosing the proper paper is very important. Since the printer is actually projecting droplets of ink onto the paper, the ink will bleed on a paper that is too absorbent—roughly equivalent to writing with a fountain pen on tissue paper. So be sure to buy paper suited for an ink-jet printer. The paper supplied by Hewlett-Packard has only one good side, and therefore you must be careful how you load the paper.

I found the paper loading to be very easy. The left pin wheel (tractor) is fixed so only the right side needs to be adjusted. You insert the paper from the back, under the paper separator, place it behind the pin wheels, and bring it around to the front. There is no platen. After you adjust the right pin wheel and close the paper bail, you're

(continued)

Mark Haas (2600 Tenth St., Berkeley, CA 94710) is the technical director for Osborne/McGraw-Hill.

AT A GLANCE

Name
Hewlett-Packard ThinkJet printer

Manufacturer
Hewlett-Packard Company
1081 Embarcadero Rd.
Palo Alto, CA 94304
800-367-4772

Type
Dot matrix, ink jet

Size
Approximately 11 inches wide by 3½ inches high by 8 inches deep

Equipment Needed
Computer with Hewlett-Packard Interface Loop port, Hewlett-Packard Interface Bus (IEEE-488) interface, or Centronics-compatible interface

Features
Quiet operation, battery-powered portable (2225B only), 4 pitches, bold, underline, raster graphics

Documentation
78-page owner's manual

Price
Printer: $495 (all models), replacement cartridge: $7.95

Warranty
90-day limited

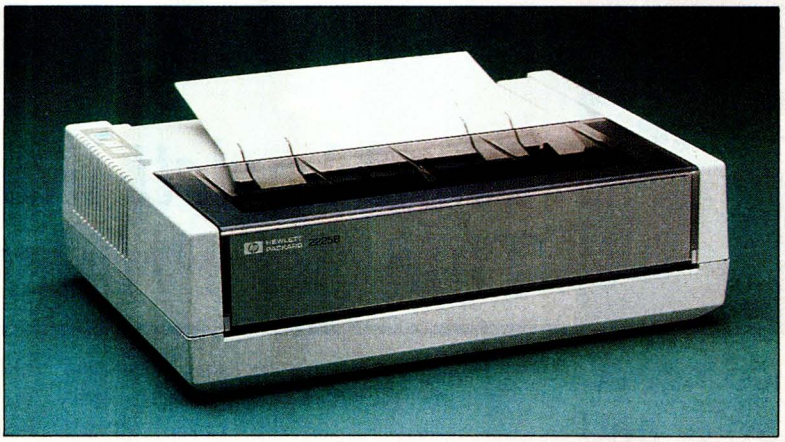

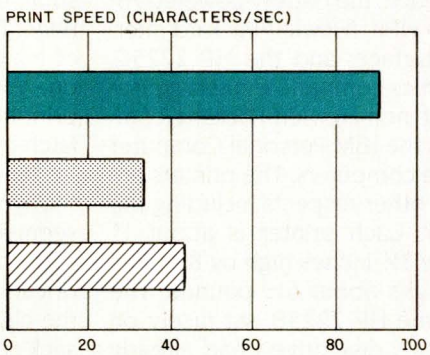

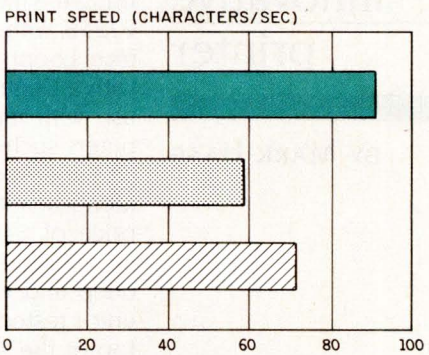

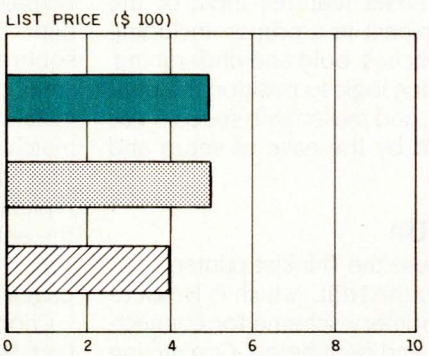




```
This is the Hewlett-Packard 2225B Thinkjet Printer.

This is the Epson RX-80. This is the Epson

This is the Star Gemini-10X  This is the St
```

These graphs compare the ThinkJet 2225B printer with the Epson RX-80 and Gemini-10X in print speed (emphasized and draft modes), list price, and print quality. The print speeds were determined by timing how long each printer took to print 50 lines of 60 As (see "The Art of Benchmarking Printers," by Sergio Mello-Grand in the February 1984 BYTE, page 193). The prices shown are list prices and include tractor-feed mechanisms.

The ThinkJet printer accepts both single sheets and fanfold paper.

done. The ThinkJet will accept both single sheets and fanfold paper.

Since the ThinkJet 2225B is battery powered, you don't have to plug it in before turning it on, which you do by hitting a rocker switch on the back of the printer. You can perform the built-in self-test by holding down the line-feed button and turning the printer on. When you release the button, a programmed set of printed examples will appear, including the full character set, graphics, different pitches, etc. A full page is printed, though you can terminate the test at any time by turning the printer off.

I had never used an ink-jet printer before, and I was impressed at how quiet the ThinkJet was. All I heard was the gentle whir of the motor moving the print head back and forth. There's none of the high-frequency noise usually associated with print-head pins hitting paper.

Printer Features

Though the ThinkJet printer doesn't perform as many functions as some of the more powerful (and expensive) printers, it can be quite flexible. Through software commands you can control pitch, print attributes, page length, text length, and graphics.

The ThinkJet can print in four pitches: normal (12 characters per inch [cpi]), expanded (6 cpi), compressed (21.3 cpi), and a combination of expanded and compressed (10.7 cpi). Given the maximum line length the ThinkJet can print, each pitch has its maximum number of characters per line: normal, 80; expanded, 40; compressed, 142; expanded-compressed, 71. The ThinkJet cannot print normal characters at 10 cpi (as called for in BYTE's benchmark tests), so the speed benchmark was performed at 12 cpi.

ThinkJet can print each of the four pitches in bold, underlined, or both, all in one pass of the print head. An example of all the possible combinations is shown in figure 1. You can set the line spacing (either 6 or 8 lines per inch), the page length (up to 255 lines), and the number of lines of text on each page. The last two are related, however, and changing the page length alone automatically adjusts the text length to 1 inch less than the page length. A full line of text still leaves a 1-inch margin on both the left and right sides of the paper, and there is no way to override this. The display functions mode is useful for debugging, and it prints control and escape sequences rather than executing them.

If you intend to use the ThinkJet printer with commercial software packages that have graphics output, such as Lotus 1-2-3, be aware that ThinkJet interprets graphics data that it receives from the computer differently from other popular printers such as Epson's. Unless you are up to writing your own graphics drivers, you

(continued)

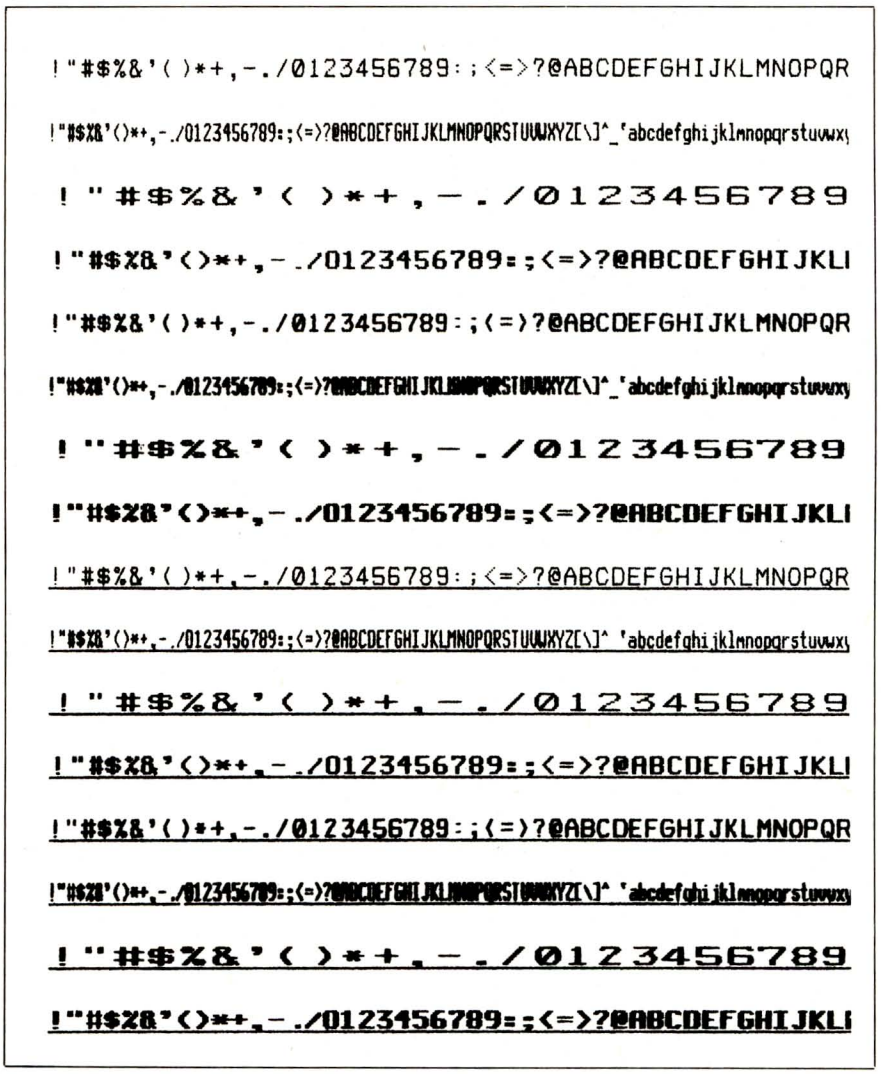

Figure 1: *Print sample from the ThinkJet printer showing normal, compressed, expanded, and expanded-compressed pitches in combination with bold and underlining.*

C SOFTWARE DEVELOPMENT
PCDOS/MSDOS

- FULL C COMPILER PER K&R
  - Inline 8087 or Assembler Floating Point
  - Full 1 MB Addressing for Code or Data
  - Transcendental Functions
- MSDOS 1.1/2.0 LIBRARY SUPPORT
  - Program Chaining using Exec
  - Environment Available to Main
- **c-window**™ C SOURCE CODE DEBUGGER
  - Variable Display & Alteration Using C Expression
- FAST 8088/8086 ASSEMBLER

Combined Package — $199

Call or write:

c-systems Fullerton, CA 92634
P.O. Box 3253 714-637-5362
TM c-systems

IN LESS THAN 3 MINUTES

Your IBM Model 50, 60, 65, 75, 85 or 95 Electronic Typewriter can be a computer printer or terminal using our interface modules:
Model 5060 RS232 Serial
Model 5060-CP Centronics Parallel

Both Versions can be easily installed and require NO modifications to the typewriter. A 2K buffer is standard, 8K optional.



CALIFORNIA MICRO COMPUTER
9323 Warbler Ave., Fountain Valley, CA 92708
(714) 964-9301

Buy/Sell Used Hardware Without Risk!!!

In addition to receiving a monthly newsletter containing latest computer information and sales, membership allows you 1 free ad plus additional ads at reduced prices. Buyer selects ad, sends purchase price to Computer Swap Shop who holds same in escrow and notifies seller who ships to buyer. Buyer has 7 days to examine the equipment and if satisfied, seller receives sales price less small commission; otherwise, money is refunded. You must be a member to buy or sell with Computer Swap Shop Inc.

NO RISK! BONDED.

Send $20 subscription fee to:

Computer Swap Shop, Inc.
Box 2988
Delray Beach, FL 33444

Inquiry 79

The ThinkJet is very easy to use, so not much is required for documentation.

should make sure that the software has a driver for the ThinkJet.

Documentation

The ThinkJet printer is very easy to use, so not much is required for documentation. The manual includes sections on: initial setup, with appropriate warnings about things like not eating the ink; how to use each printer function and a table containing decimal equivalents of the command sequences that makes BASIC programming a snap; an explanation of the graphics function, including a simple example; a short maintenance and troubleshooting guide; and appendixes on using the printer with the HP 41, HP 71, HP 75, and HP series 80 computers. The manual also discusses how to connect the ThinkJet printer through an HPIL/HPIB (IEEE-488) interface converter.

BYTE Benchmarks

As I explained previously, I did the BYTE printer benchmarks for the ThinkJet printer in the 12-cpi (normal) mode. Note that the ThinkJet's print head moves at a constant linear velocity, even for bold and underlining. Since the linear velocity is fixed, the number of characters per second (cps) is really dependent on the pitch of the characters. The ThinkJet prints a line of 40 characters in expanded mode, for example, in the same time as it prints a line of 142 characters in compressed mode, though the latter has a cps rate over 3½ times greater than the expanded mode.

The ThinkJet printer that I tested printed fifty 60-character lines (3000 characters, normal pitch) in 32.96 seconds, or 90.02 characters per second.

Hewlett-Packard is claiming a print speed of 150 cps at 12 cpi, but they are measuring only burst speed and are not including the time it takes for the print head to accelerate and decelerate at the beginning and end of each line, as well as the time to advance the paper one line. To confirm this I printed fifty 50-character lines (2500 characters) at the normal pitch, 12 cpi. This took only 29.7 seconds, which means that the additional 500 characters of the first test took an additional 3.26 seconds (32.96–29.7), for a burst speed of 153.37 cps at normal pitch.

Conclusions

I used the ThinkJet with a prerelease version of WordStar for the HP 110 portable computer. All functions are supported except for microjustification and variable line height, as would be expected. I printed subscripts and superscripts using the printer's half-line feed function, as no reverse line feeds can be done. But the ThinkJet's ability to print bold and underlining (or both together) in one pass does speed up printing documents containing these attributes. Most dot-matrix impact printers print bold and underlining by overprinting, sometimes several times, and this cuts throughput dramatically in documents containing many of these attributes.

Although Hewlett-Packard provides remedies for unclogging clogged print heads, I had no such trouble while testing the printer, even after it was left sitting unused for two weeks. Changing the cartridges couldn't be easier, and HP even provides you with a new print head.

The 2225B battery-powered ThinkJet printer makes a nice addition to Hewlett-Packard's portable line. The other two ThinkJet models compare favorably to others in their price range. They are quiet, compact, lightweight, and provide enough features to make them useful for most applications. Together with the HP 110 portable computer and the HP 9114A disk drive, the ThinkJet printer completes the loop, so to speak, on a powerful portable computing system. ■

2 Megabytes

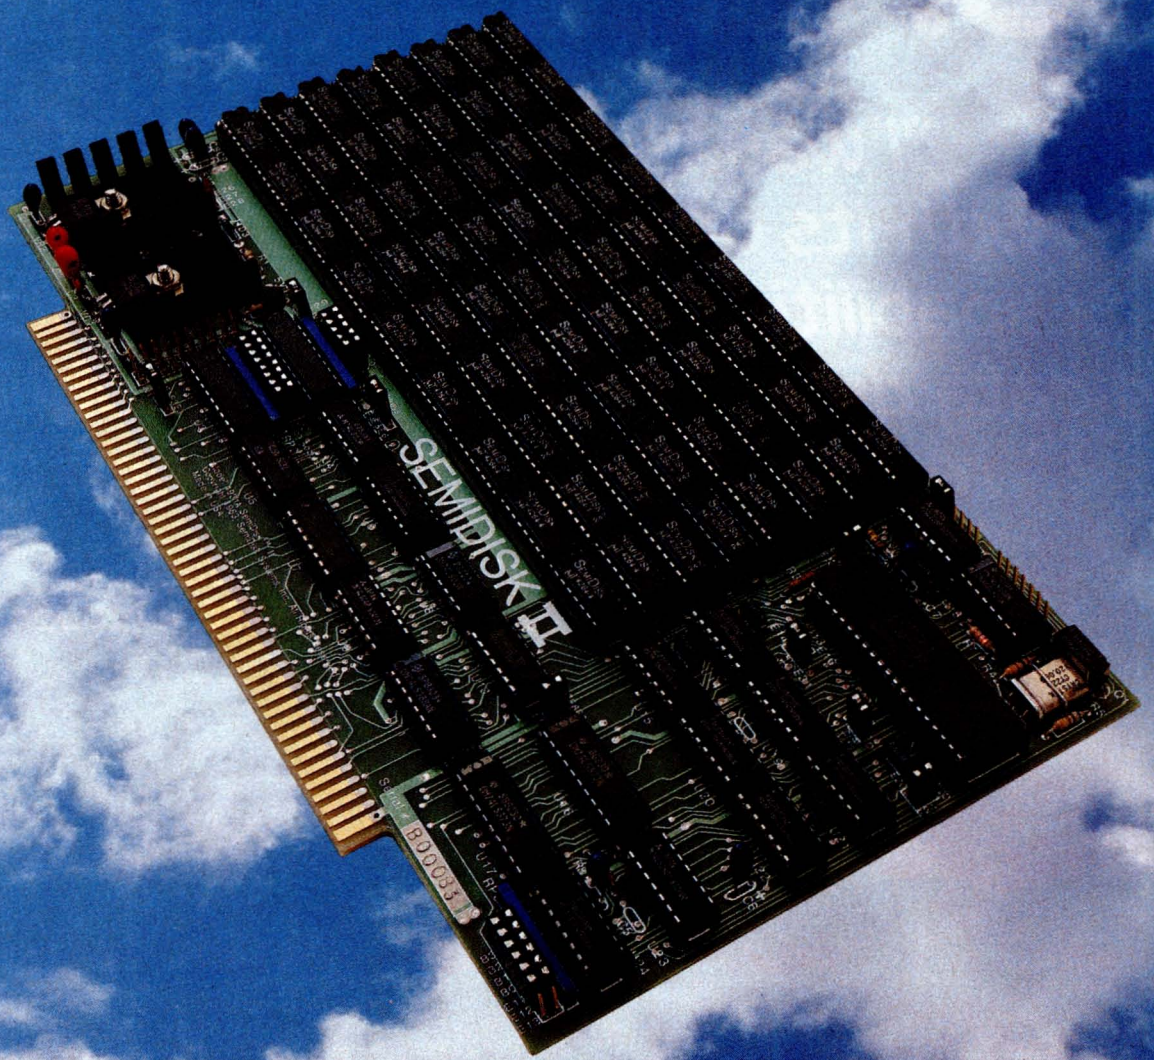

THE LARGEST CAPACITY DISK EMULATOR YOU HAVE EVER SEEN.

You know about disk emulators. They're fast semiconductor disk drives. Very fast. But until now, the most disk storage you could get on a single board was 1Mbyte. (That was from us, too.) Now we have news that'll really blow your socks off... 2 Megabytes on a single board. Available NOW. That's not a pie-in-the-sky promise.

That's enough storage for dozens of large programs and hundreds of kilobytes of data files. Enough for almost anything you want to do with a disk drive. But that's not all. With SemiSpool, our CP/M print spooler, you can implement a print buffer hundreds of kilobytes long in seconds. All in software. At no extra cost.

Another thing about disk emulators. Unless they're from SemiDisk Systems, they're probably afraid of the dark: Lose power or turn the computer off, and your valuable data goes to that big backup disk in the sky. But our Battery Backup Units keep SemiDisk data flying high while your computer is off, and up to 10 hours during a complete blackout.

So remember this: SemiDisk Systems has been building dedicated microcomputer disk emulators longer than anyone. And larger. And faster. And at a much lower cost. And that's not a lot of hot air.

AT A PRICE YOU NEVER THOUGHT YOU'D SEE

	512K	1Mbyte	2Mbyte
SemiDisk I, S-100	$995	$1795	
SemiDisk II, S-100	$1295	$2095	$2549
IBM PC, XT, AT	$945	$1795	$2499
QX-10,QX-16	$799		$2499
TRS-80 II,12,16	$995	$1795	$2499
Battery Backup Unit	$150		

SEMIDISK

SemiDisk Systems, Inc.
P.O. Box GG, Beaverton, Oregon 97075
503-642-3100

Inquiry 314

Call 503-646-5510 for CBBS/NW, 503-775-4838 for CBBS/PCS, and 503 649-8327 for CBBS/Aloha, all SemiDisk-equipped computer bulletin boards (300/1200 baud). SemiDisk, SemiSpool trademarks of SemiDisk Systems. CP/M trademark of Digital Research.

DATAEASE™

"I was very impressed with its overall performance and capabilities . . . excellent interactive and data quality assurance capabilities . . . relatively easy to master . . ."

Bill Jacobson
***BYTE*, October 1984**



DATAEASE is the most complete information management system available. While literally hundreds of systems claim to offer simple solutions to complex business information needs, rave reviews from our clients, application developers and the media confirm DATAEASE as the **only** product which delivers on this promise.

"DATAEASE received the highest 'Overall Evaluation' rating of the five fully relational programs tested by Software Digest in its report on 20 IBM PC database and file management programs appearing in the March 1984 issue of The Ratings Newsletter."
The Ratings Newsletter
Software Digest, 1984

Well over 10,000 business clients worldwide — large and small — say DATAEASE's power and ease-of-use greatly increases productivity. In fact in September of 1984, MIS, Inc. (a leading supplier of software to corporate America) sold more DATAEASE programs than any other database management systems — ahead of dBASEIII®, Symphony™, Framework™ and Rbase™ 4000!

"DATAEASE is a true winner — on technical merit alone, DATAEASE would put dBASEII out of business."
Business Computer Systems
April 1984

DATAEASE is the ideal combination of power and ease-of-use. With or without programming skills, you can harness the full power of your micro to create forms and custom menus; sort, group and calculate statistical information; update and link files; access

BYTE Review Comparison Chart

	DATAEASE	Condor	dBASE II
Menu driven	Yes	No	No
Built-in programming language	No	No	Yes
Command/Batch file processing	Yes	Yes	Yes (1)
Custom screen generator	Yes	Yes	Yes
Password protection	Yes	No	No
Prevents duplicate entries	Yes	No	No
Data field masking	Yes	No	Yes (1)
Lookup file capabilities	Yes	No	Yes (1)
Maximum capacities			
Files open concurrently	No limit	1	2
Data-entry forms per file	No limit	1	1
Records per file	65,535	65,534	65,535
Fields per record	255	127	32
Characters per record	8000	1024	1000
Characters per field	255	127	254
Active index keys	255	1	7
Quick report generator	Yes	Yes	Yes
Complex report writer	Yes	Yes	No
Color capabilities	Yes	No	(2)
Uses IBM PC function keys	Yes	No	No
Program file disk space needed	590K (3)	270K	96K
Random-access memory required	192K	128K	128K
List price	$595	$650	$495
Available formats	Most 16-bit	Most	Most
Format tested	PC-DOS	PC-DOS	PC-DOS
Version tested	2.10	2.11	2.40

NOTES: (1) Requires programming. (2) Very limited capabilities, requires programming. (3) Program files may be located on more than one disk.

forms to generate standard or custom reports; interchange data with mainframes and popular programs . . . and much more.

"It's the best thing since peanut butter!"
Nicholas D. Lentner, Purchasing Agent
State University of New York

Finding DATAEASE. Demonstrating and supporting database management systems is a difficult task. That's why we've made DATAEASE only available through highly competent retailers such as participating ComputerLand stores. Contact us directly regarding our Dealer or Corporate Programs. Or for information on The SOFTEASE™ Family of Products (DATAEASE™, WORDEASE™, GRAPHEASE™ and DOSEASE™).

Inquiry 323

DATAEASE BYT-1/85
Demonstration Diskette

Check one: ☐ IBM PC ☐ WANG ☐ DEC ☐ TI
☐ Check attached for $10. Send information package with demonstration.
☐ Send information only.
Name: _____
Title: _____ Phone: _____
Company: _____
Street: _____
City: _____ State: _____ Zip: _____

Software Solutions, Inc., 305 Bic Drive
Milford, CT 06460 • 203-877-9268 • Telex: 703972

For information call:
800-243-5123

Canada
Logiquest, Inc., Montreal; 514-397-9631

Scandanavia
West Soft A/S, Alesund, Norway; (47) 71-41141

South Africa
Dataflex, Craighill; 11724-6355

United Kingdom
Sapphire Systems, Essex; 01-544-0582

West Germany
Markt & Technik, Munich; 089-4613-0

© 1984 Software Solutions, Inc

interact with a Genius



135W POWER SUPPLY
Hard Disk ready
+12V at 4.5A max
+5V at 15A max
Same dimension and plug compatible with IBM PC/XT power supply



HARD DISK ASSEMBLY
10 Mb formatted Fixed Disk
5 Mb formatted Removable Cartridge
Unlimited storage
Bootable from fixed disk



SUPER MOTHERBOARD
Single layer double sided board
Same dimension as IBM motherboard
Up to 256K Ram on-board
8 I/O slots



PERSYST B.O.B. BOARD
Super hi-res display adapter on text and graphics
10 x 16 character cell in monochrome and color
Programmable and software selectable character sets



MULTIFUNCTION CARD
0-384K memory expansion plus 256K on board to give maximum addressable memory.



The Ultimate in IBM PC/XT® compatibles.

The Super XT Plus by Super Computer is a better alternative than the standard PC/XT configuration. The 256Kb of dynamic RAM with parity can be upgraded to 640Kb. Eight I/O slots give you the maximum in tailored expandability. A 16 Bit 8088 Microprocessor with an 8087 coprocessor option gives you the speed to tackle the heavy jobs. Two half-height 360K Floppy Disk Drives are matched with a half-height 5 Mb Removable Hard Disk and a 10 Mb fixed Hard Disk. A Multfunction card is included with Serial and Parallel ports, Clock Calendar, Game port, and memory expansion to 384K. An Ultra High-Res Taxan® monitor equipped with Persyst's B.O.B.® Board gives you the highest resolution possible (720 x 400). A unique 135 Watt Power Supply offers 220 Voltage conversion as an option.
The Super Computer PC/XT.

Interact with a Genius!

SUPER COMPUTER
Manufacturer/Distributor
17813 South Main St. Suite 103, Gardena, CA 90248
213/532-2133

Inquiry 338

® 1984 Super Computer, Inc.

DEALER AND OEM INQUIRES INVITED

FAX 213/532-6342
TELEX 3719394 SUPER

IBM PC/XT is a registered trademark of International Business Machines, Corp.
Taxan is a registered trademark of Taxan Corp.
Persyst is a registered trademark of Personal Systems Technology, Inc.

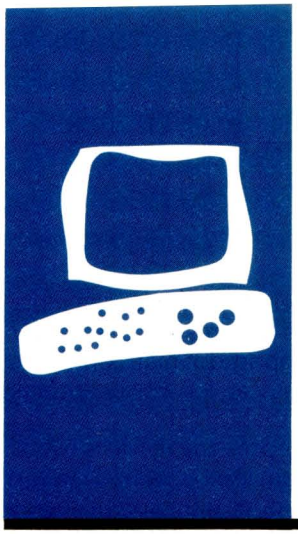

The TI Omni 800/Model 855 Printer

ROM-based cartridges provide a variety of fonts

BY MARK HAAS

Like most computer users, I often find myself needing printouts of varying quality. Program listings can have a coarse, dot-matrix look, as long as they are produced quickly. The letters I send, however, need a more polished look. The so-called enhanced mode on my dot-matrix printer is better than the normal draft mode but lacks the quality print associated with more expensive dot-matrix and daisy-wheel printers. But most of these cannot produce the graphics I use. Do I need two printers?

The Texas Instruments Omni 800/Model 855 printer is an interesting alternative for those of us in this situation. In addition to providing quick drafts, graphics, and high-quality characters, the 855's unique system of selectable font modules (ROM [read-only memory] cartridges) gives you an easy, flexible way of choosing different type styles. This printer also comes with serial and parallel interfaces that can be connected to most computers. All this, including the tractor-feed mechanism, comes in a compact unit for $995, little more than many dot-matrix printers.

SETTING IT UP

The printer I tested arrived in its factory carton and required me to set it up. This process includes unpacking the printer, installing the ribbon and tractor-drive assembly, setting the tractor width and position, loading the paper and font modules, adjusting the print head, and connecting the cable to the computer.

Unpacking the printer is straightforward, just a matter of checking that everything was in the carton. Installing the ribbon was remarkably easy—I didn't even get ink on my fingers. This involved a trick, however: I used the eraser end of a pencil to roll the ribbon into the ribbon guide in front of the print head. The manual provides another equally valid method and warns of the dangers of a hot print head when changing ribbons after using the printer. The tractor-drive assembly installs easily, too.

Loading the paper was an interesting diversion. In my enthusiasm to get started, I loaded it without looking at the manual. Since the tractors sit behind the platen and feed the paper into it, I passed the paper through them, closed the tractor covers, and turned the platen until the paper passed under it, around and up the front. This worked perfectly.

In preparing this article, however, I decided to follow the instructions in the manual: "Insert the paper [from behind the platen and] turn the paper advance knob to move the paper around the platen . . . until the paper can be laid over the tractor-drive pins. Close the tractor covers." Following these instructions will surely lead you to disaster, because the paper coming out from in front of the platen will be pushed back into the platen by the movement of the tractors. Even the diagram in the manual showing the paper path with dotted lines will cause improper loading. It would lead you to believe that the tractors pull the paper out from the platen, which they don't. Could it be that this diagram and the instructions were "lifted" from another TI printer manual? The bottom line is don't follow the manual to load the paper. It's wrong.

[*Editor's note: Texas Instruments has acknowledged the problem with early editions of the manual and states that it began shipping corrected versions with the printer after March 1.*]

You plug the font modules into the front of the printer in much the same way that a game cartridge plugs into its console. The 855 comes with one font module, Gothic ASCII (American Standard Code for Information Interchange) 96, and room for three font modules. Each module contains a small green LED (light-emitting diode) that lights when that module is selected. You can select modules by software or from the control panel that is atop the printer.

It is possible to configure the cabling from the printer to the computer for either serial

(continued)

Mark Haas (2600 Tenth St., Berkeley, CA 94710) is the technical director for Osborne/McGraw-Hill.

The 855 can operate in two command modes.

or parallel operation. The unit I tested was connected for parallel operation. The pinout is the standard Centronics type, and the manual has complete details on the interfacing. In fact, the cable sent to me from BYTE was not in the correct configuration. I followed the diagram and charts in the manual to reconfigure the cable, and it then worked perfectly.

FEATURES

Turning on the printer causes it to light up like a Christmas tree, as all 12 LEDs on the control panel and each font module light up as part of the self-test feature. After about five seconds, the print head positions itself at the beginning of the line, and the printer assumes the default state. The default state means the printer is in the draft mode (six lines per inch), the lowest-numbered (leftmost) font module is selected, and the printer is in either the word-processing or data-processing mode, as determined by an internal switch setting (more on this below). The font selected determines the character spacing (10 or 12 characters per inch).

Holding the Module Select switch down and then turning on the power causes the printer to produce a barber-pole pattern of characters across the paper. This helps you set the print head and test the different fonts, character and line spacings, and draft and quality modes.

The 855 can operate in one of two command modes: word processing and data processing. In the word-processing mode, the printer accepts most of the commands used with daisy-wheel printers such as the Qume Sprint 9/11 and the Diablo 630. This is useful for printing text with subscripts and superscripts, proportional spacing, and automatic justification. Most word processors have printer drivers for this type of printer. WordStar users in particular can more easily access features since WordStar does not support dot-matrix printers well. Now you can let WordStar think you have a Diablo 630.

The data-processing mode is useful with a program like Lotus 1-2-3, where you want to print both spreadsheets and graphics. The graphics commands for the 855's 60 and 120 dot-per-inch bit-mapped images are identical to those for an Epson FX-80. Lotus 1-2-3 was able to produce single-, double-, and triple-density graphics using its FX-80 printer driver, but the printer did not support the quad-density (240 dot-per-inch) graphics mode. I tested this feature using Lotus 1-2-3 to print the graph of some data. The result is shown in figure 1.

You are able to set the 855 in either the word-processing or data-processing mode by setting a switch near the print head when the unit is first turned on. Subsequently, either mode can be selected by a software command from the computer.

(continued)

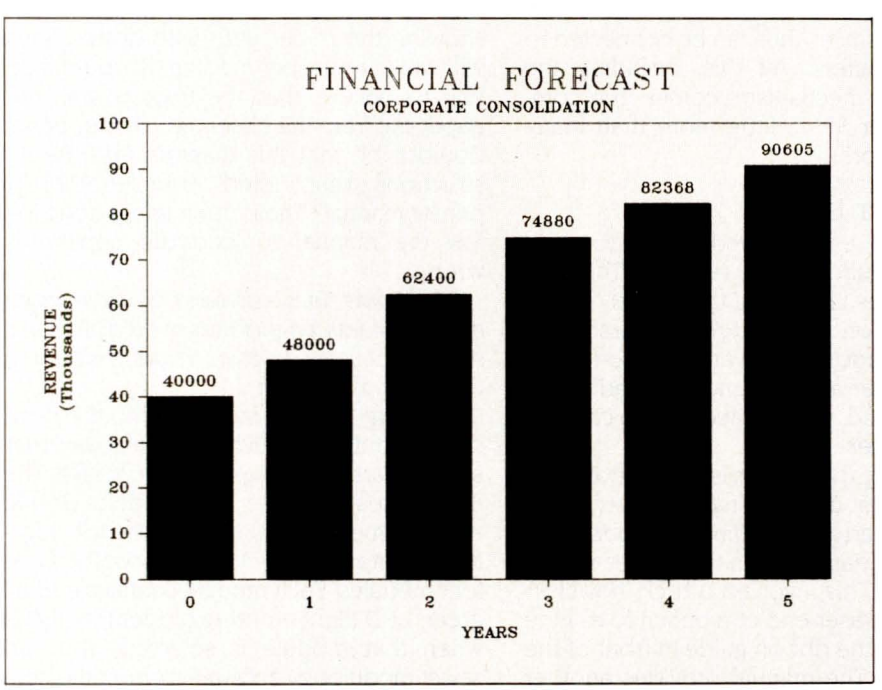

Figure 1: A *triple-density graph produced by* Lotus 1-2-3 *and printed by the* Model 855 *printer (from* The Osborne/McGraw-Hill Guide to Using Lotus 1-2-3).

Table 1: A *comparison of the print speed of the Texas Instruments* Omni 800/Model 855 *printer with tested speeds of other popular printers. For the dot-matrix printers, the test consisted of printing* 50 *lines containing* 80 As. *The daisy-wheel printers were tested using* Shannon *text. All tests were done at* 10 *cpi.*

	Claimed	Actual
Model 855		
Draft mode	150	115.9
Quality mode	35	29.9
Epson FX-80		
Draft mode	160	95.5
Emphasized mode		60.3
Star Gemini-10X		
Draft mode	120	63.6
Emphasized mode		41.6
Diablo 630	31.8	38.2
Juki 6100	18	18.0

Here's The Savvy-est True Dual Trace 10 MHz Digital Storage Scope You Ever Saw . . . At The Saving-est Price. Only $595.

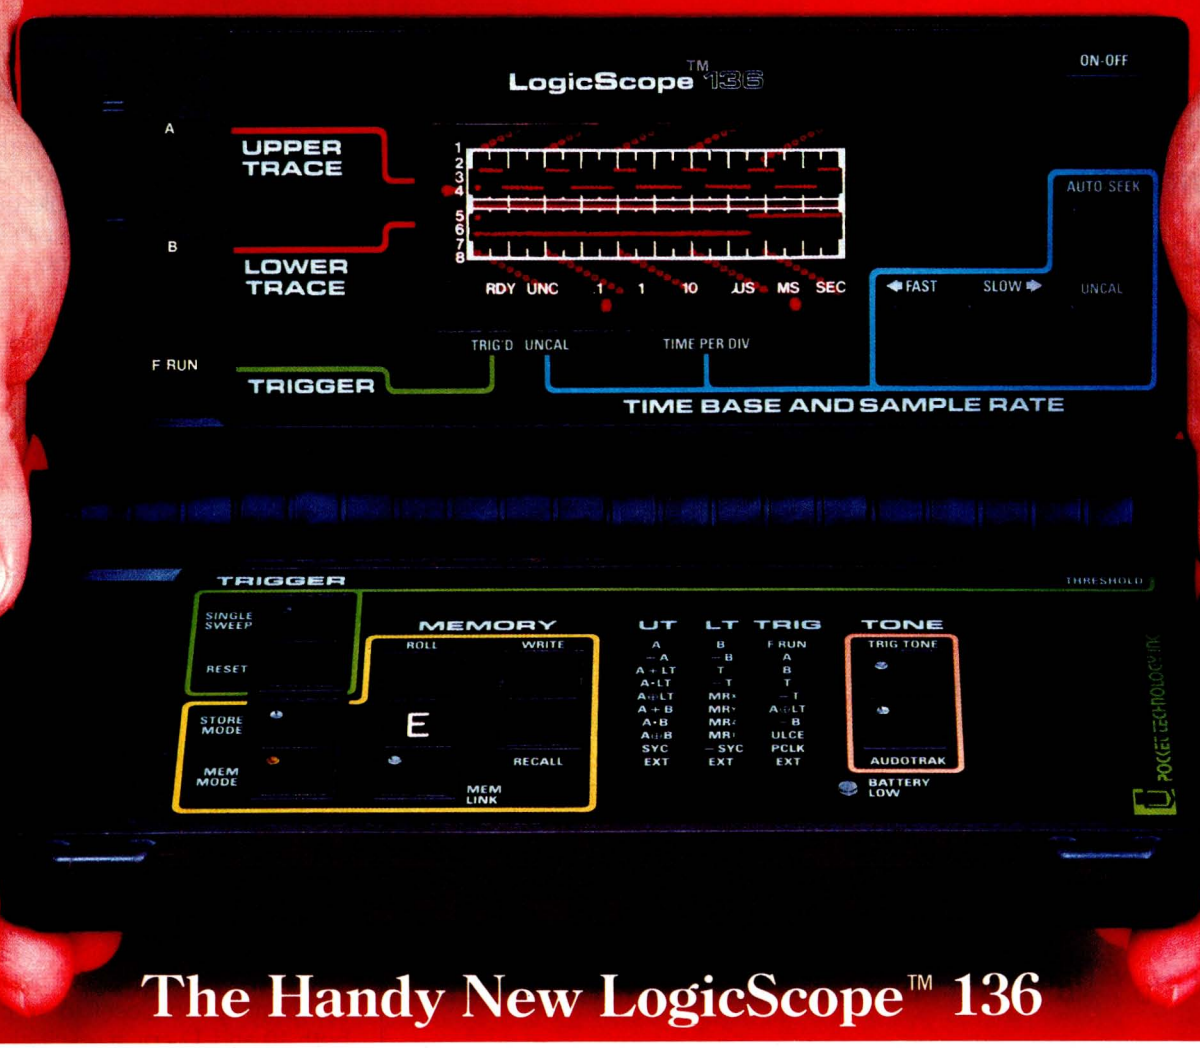

The Handy New LogicScope™ 136

True Dual Trace • 10 MHz Real Time Bandwidth • 3 Input Channels • I/O Port Digital Waveform Storage • Boolean Waveform Operations • Audio Functions 8.0 (L) x 4.5 (D) x 1.75 (H) Inches • 1.25 Pounds • 9 Volt Battery/AC Operation

Consider the LogicScope 136

■ The LogicScope 136 is the next logical step in test instrumentation for you. It combines many of the features and capabilities of sophisticated logic analyzers and oscilloscopes . . . and it fits in your hand. Never before has so much technology been available in so small an instrument, at such a low price.

■ The pocket-sized LogicScope 136 is made possible by a patented breakthrough in display technology. The conventional CRT has been replaced by a unique array of 400 LED's that permits simultaneous display of two digital waveforms.

■ The 136 can be used for viewing single shot events, or repetitive waveforms. It can be operated in real time mode, or in memory mode which permits acquisition and storage of up to 50-100 bit waveforms. These can be recalled, logically compared (AND, OR, EXCLUSIVE OR) to other input waveforms, or output to an external device via an I/O port. This I/O port will also accept future add-on 136 Modules.

■ Its very low cost, convenience and ease-of-use make the LogicScope the ideal instrument, for designing, troubleshooting or repairing digital systems. Made in U.S.A.

Consider its Engineering & Field Service Applications:

■ On microprocessor-based systems, check the timing relationship of various parameters relative to the system clock and other key events. Its storage capability allows visual and logical comparison of non-repetitive waveforms to known reference signals. Output in the start-up of the digital device can be compared to reference signals to determine the operating state of the device. Questionable waveforms can be stored for analysis.

■ Its light weight and small size make the LogicScope convenient to take on every service call. The 136 provides much more information for trouble shooting a digital system or peripheral than a logic probe or digital counter without having to lug an oscilloscope or logic analyzer along.

Contact us for the name of your local distributor

POCKET TECHNOLOGY, INC.
7320 Parkway Drive, Hanover, MD 21076 U.S.A.
301-796-3300 TELEX 908207
Division of Renaissance Technology Corp.

Inquiry 277

The 855 performs admirably in regard to print quality.

Within each command mode, you choose either quality mode, a near letter-quality mode with 32- by 18-dot characters, or draft mode, with 9 by 9 dot-matrix characters.

A useful feature is the ability to configure certain parameters from the control panel atop the printer. These include the selection of the font module, character spacing, line spacing, draft or quality mode, setting the top of form, setting the form length, and performing linefeeds and formfeeds without having to go off line. This makes it possible to prepare and print several drafts of a letter, for example, and then print the final copy using the quality mode without having to concern yourself with embedded printer commands or changing printer drivers. A simple push of a button does it. And you can just as easily change the font, too.

This is the draft mode.
ABCDEFGHIJKLMNOPQRSTUVWXYZ1234567890abcde

This is the quality mode.
ABCDEFGHIJKLMNOPQRSTUVWXYZ1234567890abcde

This is compressed mode.
ABCDEFGHIJKLMNOPQRSTUVWXYZ1234567890abcdefghijklmnopqrstuvwxyz

10 cpi.expanded print

12 cpi.expanded print moc

Now let's try the printer jumping jacks e

$N^{U}N_{D}N^{U}N_{D}N^{U}N_{D}N^{U}N_{D}N^{U}N_{D}N^{U}N_{D}N^{U}N_{D}N^{U}N_{D}N^{U}N_{D}N^{U}N_{D}N$

This is the internal character set at 12 cpi
ABCDEFGHIJKLMNOPQRSTUVWXYZ1234567890abcdefghijklm

This is the Gothic character set at 10 cp
ABCDEFGHIJKLMNOPQRSTUVWXYZ1234567890abcde

This is the Gothic character set at 12 cpi, draft
ABCDEFGHIJKLMNOPQRSTUVWXYZ1234567890abcdefghijklm

This is the Courier character set at 10 c
ABCDEFGHIJKLMNOPQRSTUVWXYZ1234567890abcde

This is the Courier character set at 12 cpi, draf
ABCDEFGHIJKLMNOPQRSTUVWXYZ1234567890abcdefghijklm

THIS IS THE ORATOR CHARACTER SET AT 10 CP
ABCDEFGHIJKLMNOPQRSTUVWXYZ1234567890ABCDE

Figure 2: *Samples of the various print modes and fonts available with the Model 855 printer.*

Using the Printer

I've used the printer for about two weeks and am pleased with it. I put the 855 through several tests, and it performed well on most of them. I tested the print speed in various modes, the forms handling, and overall operation. The "At a Glance" page reports the results.

The burst-speed rating in the draft mode is 150 characters per second (cps), bidirectional, at 10 characters per inch (cpi). When printing purely textual data, the speed is closer to 116 cps (see table 1). This was tested using Sergio Mello-Grand's benchmark test #6 (from "The Art of Benchmarking Printers," February 1984 BYTE, page 193), which involves printing 50 lines of 80 characters.

I performed a similar test using the quality mode. The TI specification for this mode is 35 cps, bidirectional, at 12 cpi. The test results showed the actual print speed closer to 30 cps for both 10 and 12 cpi, a result closer to the published specification. This occurs because, in the quality mode, the print head makes two passes over the same line, printing in the same direction to ensure better registration. Thus, the specification already includes time for head acceleration and deceleration and the time it takes the head to come back to the start of the line for the second pass.

In my mind, the tale of the tape of any printer is its print quality. (Samples appear on the "At a Glance" page.) The 855 performs admirably. As can be seen in figure 2, the quality of the draft-mode print for each character font is excellent. Characters are even, dot formation is very good, and the fonts are legible with true descenders. The quality-mode print approaches daisy-wheel print, although close inspection reveals visi-

(continued)

AT A GLANCE

Name
Texas Instruments Omni 800/
Model 855 Printer

Manufacturer
Texas Instruments Inc.
Data Systems Group
POB 402430
Dallas, TX 75240
(800) 527-3500

Physical Dimensions
17 by 13 by 5 inches, 15 pounds

Features
Interchangeable font modules; 116 cps in draft mode; 30 cps in quality mode; 7 by 9 or 9 by 9 dots per character in draft mode; 24 by 18 or 32 by 18 dots per character in quality mode; mosaic graphics; Epson-compatible raster graphics in 60 and 120 dot-per-inch densities; also capable of producing 72 and 144 dot-per-inch densities; friction paper feed; parallel and serial interfaces; 256-character buffer

Options
Adjustable-width tractor-drive assembly, paper stacking tray, roll-paper holder, 4K-byte buffer, additional font modules

Documentation
Operator's Manual and *Technical Reference Manual*

Price
$935, friction-feed model
$995, with tractor feed



The Texas Instruments Omni 800/Model 855 printer provides both near letter-quality and draft-quality printing, with a variety of type styles available in removable font modules.

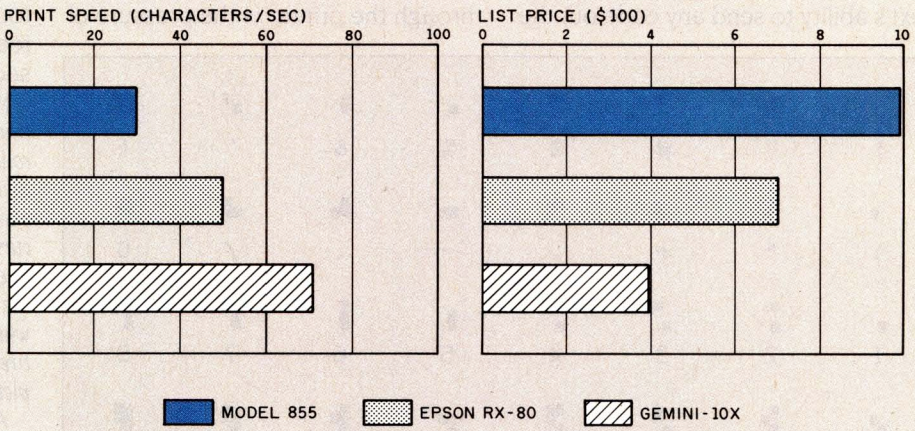


```
This is the Texas Instruments Omni 800/Mod
This is the Epson RX-80. This is the Epson
This is the Star Gemini-10X This is the St
```

The Texas Instruments Omni 800/Model 855 printer is compared with the Epson RX-80 and the Gemini-10X (all in draft mode). The pitch for all printers is 10 characters per inch. The print speeds in draft mode were determined by timing how long it took the printers to print 50 lines of 80 As each (see "The Art of Benchmarking Printers" by Sergio Mello-Grand, in the February 1984 BYTE, page 193). The prices shown are list prices, including tractor-feed mechanism.

My greatest criticism of the 855 is with the tractor setup.

ble dots and slight irregularities.

Controlling the 855 through software is straightforward. From BASIC, it is necessary only to send the proper codes to the printer using the LPRINT and CHR$ commands. I used a short BASIC program to generate figure 3, the mosaic graphics characters contained in the 855 (and the ASCII characters to produce them), and to perform the print-speed tests. Using PeachText to control the printer was just as easy, especially with PeachText's ability to send any code out the printer port with the OUT command. The test in figure 2 was generated using PeachText, which was configured to operate a Diablo 630 printer and worked perfectly with the 855 in the word-processing mode.

My greatest criticism of the 855 is with its paper-feed mechanism, specifically, the tractor setup. Unlike many printers I have used, the tractors on the 855 are used to *push* paper into the printer. Most printers use the tractors to pull paper from the printer or have two sets of tractors to maintain an even tension on the paper. The consequence of using the tractors to feed paper into the printer is that it tends to jam. I found that any slight impedance to the paper exiting the 855 during a formfeed will cause the paper being fed into the printer by the tractors to pile up behind the platen. The only thing pulling the paper through the printer is the pressure of the paper-guide rollers on the platen; the friction rollers are disengaged by the installation of the tractors.

Besides the problem with paper jamming, I found this system susceptible to paper skewing. This became evident when performing the printer "jumping jacks" shown in figure 2. The printer is required to alternately perform two half-linefeeds followed by two reverse half-linefeeds. Ideally, all the Us, Ns, and Ds should align horizontally, and in most cases they do. But should the paper exiting the printer encounter any impedance, the characters tend to skew, or droop, in their horizontal alignment. This is also a problem when graphing. In extreme cases, it can cause one pass of the two-pass quality-mode print to be offset significantly from the other. TI even recommends not performing more than one reverse linefeed. I found no problem when using friction feed, as the friction rollers keep a secure grip on the paper.

[*Editor's note: One advantage of having the tractor mechanism on the input side of the roller—and, in fact, the reason for putting it there, according to* TI*—is that it minimizes waste of paper and forms. Paper tear-off occurs about an inch away from the last printed line on a page, as opposed to printers with the tractor on the output side of the roller, which sometimes require throwing away an entire page or form upon removal of the completed document.*]

Another small annoyance I encountered was due to the lack of any indicator showing what command mode you are in: word processing or data processing. More than once I tried to use the printer with PeachText, set up for a Diablo 630, after using the printer in the data-processing mode with Lotus 1-2-3. After a few pages of printout, strange things would start happening since PeachText expected the printer to be in the word-processing mode, acting like a Diablo 630. I hadn't remembered to reset the switch near the print head to change modes, and there was no external indicator to warn me. Since you can control so many things from the 855's control panel, why not include changing command modes, too?

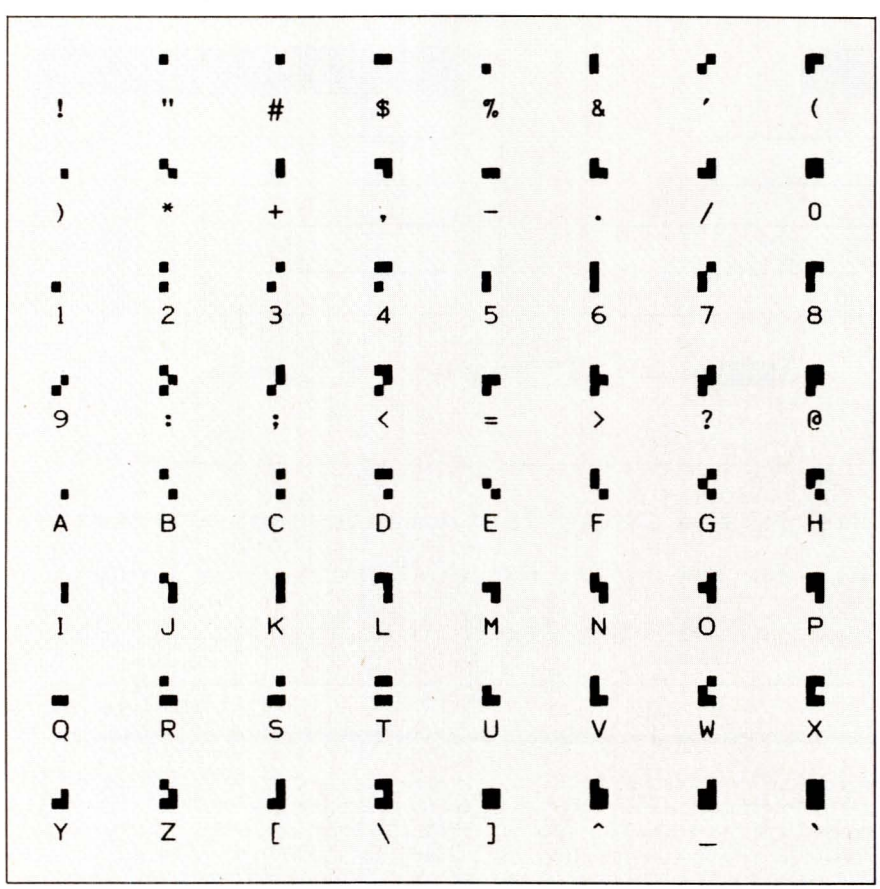

Figure 3: *The mosaic graphics characters available with the Model 855 printer.*

Printer operation was not particularly noisy for an office environment, but those using the unit at home may find the whine of the print-head pins a bit much, especially in the graphics mode when all pins are firing. The clamor from this kind of graphing penetrated a closed bedroom door, traveled the length of my house, and was clearly perceptible over the World War II battle on the television. It should be noted, however, that this was no noisier than other dot-matrix impact printers I have used. TI claims the printer has a noise level of 62 decibels with the tractor.

CONCLUSIONS

Until the introduction of the TI 855 printer, one usually had to choose between buying a printer that produced fast drafts and graphics or one that produced high-quality print. If both were needed, it meant buying two printers or a very expensive one. TI now offers an alternative.

The TI 855 printer provides

- high-speed, draft-quality printing
- moderate-speed, near letter-quality printing
- compatibility with Epson FX-80 graphics commands
- compatibility with daisy-wheel printers
- selectable, interchangeable font modules
- convenient control-panel operation
- mosaic and raster graphics
- parallel and serial interfaces
- 256-character buffer, expandable to 4K bytes

In the near future, TI intends to offer additional options, including downloadable character fonts and a character editor to produce them, the ability to produce double-height characters, a character set fully compatible with the TI Professional Computer's, and more. All this is possible due to the plug-in font modules the printer accepts.

If you want a printer to dance all day with WordStar and still be able to graph your 1-2-3 data, take a look at the TI 855. ■

OK-WRITER T.M.



LETTER QUALITY
Enhancement for Dot Matrix Printers

- Easy to install
- Plug-in module
- Okidata printers
- Letter Quality: 30 cps
- Draft Quality: 120 cps
- 10, 12, 17 cpi
- Full dot addressable graphics
- Front panel access to all features
- Proportional spacing, bold, double width, underlining, self-test, etc.
- Serial and parallel interfaces retained
- HELP mode; Diagnostic HEX dump
- And many other features

Designed for upgrading your current or new ML82A/83A printer.

RAINBOW TECHNOLOGIES, INC.
P.O. Box 7200, Costa Mesa, CA 92628
(714) 241-0565 Telex 386078

Inquiry 298

IBM-PC $1699
256 K 2 DS/DD DRIVES
Other Configurations Available

EPSON FX-80/100...Best Price
OKIDATA 92P/93P...Best Price
BROTHER HR-15 ..... $395
HR-25 ..... $690
P.G.S. MAX-12..... $175
HX-12 ..... $459
TANDON (360 K) $155
TEAC 55B (360 K) $132

We carry a large selection of hardware and software

CALL US

COMPUTERLANE UNLTD. INC.
Exporting Div. Telex: 662841 SK.COMP
(818) 884-8644
22107 Roscoe Blvd.
Canoga Park, Ca 91304
HOURS DAILY 10-7
We Accept C.O.D. - P.O. - L.C.

Inquiry 81

AFFORDABLE M-68000 COMPUTER SYSTEM



M68KCPU 6-10 MHz CPU, 20K static RAM, 16K EPROM, on board monitor, two RS-232 serial ports, 16-bit parallel port, 5 timer/-counters expansion bus.
Bare board ..... $ 99.95
Complete Kit $595.00
MD512K 128-512K static RAM, floppy disk controller & hard disk interface Bare board..... $ 99.95
Complete Kit (128K)..... $725.00
M68KE Enclosure with power supply, fan, filter, 4 slot card cage
..... $249.00
M68KASM M68000 Macro Cross Assembler for CP/M80, IBM PC, TRS-80 and Apple II computers
..... $199.00
UPS shipping & handling $ 4.00
COD orders add $ 3.00
Foreign orders add $20.00
California residents add 6.5% tax

EMS Educational Microcomputer Sytems (714) 854-8545
P.O. Box 16115 • Irvine, CA 92713

Inquiry 123

Verbatim
flexible disks

Call Free **(800) 235-4137** for prices and information. Dealer inquiries invited. C.O.D. and charge cards accepted.



VISA

PACIFIC EXCHANGES
100 Foothill Blvd.
San Luis Obispo, CA 93401. In Cal. call (800) 592-5935 or (805) 543-1037.

Inquiry 268

CONVERSE WITH YOUR COMPUTER

AT LAST! A FULL IMPLEMENTATION of the original ELIZA program is now available to run on your microcomputer!

Created at MIT in 1966, ELIZA has become the world's most celebrated artificial intelligence demonstration program. ELIZA is a non-directive psychotherapist who analyzes each statement as you type it in and then responds with her own comment or question—and her remarks are often amazingly appropriate!

Designed to run on a large mainframe, ELIZA has never before been available to personal computer users except in greatly stripped down versions lacking the sophistication which made the original program so fascinating.

Now, our new microcomputer version possessing the **FULL** power and range of expression of the original is being offered at the introductory price of only $25. And if you want to find out how she does it (or teach her to do more), we will include the complete **SOURCE PROGRAM** for only $20 additional.

Order your copy of ELIZA today and you'll never again wonder how to respond when you hear someone say, "Okay, let's see what this computer of yours can actually do!"

ELIZA IS AVAILABLE IN THE FOLLOWING FORMATS:

1. 5¼ inch disk for the 48K Apple II, II Plus, IIe or IIc
$25 for Protected Version—$45 for Applesoft Source Version
2. 5¼ inch disk for the 64K IBM Personal Computer
$25 for Protected Version—$45 for IBM Disk BASIC Source Version
3. 5¼ inch disk or tape cassette for the Commodore 64 (specify which)
$25 for Protected Version—$45 for C-64 BASIC Source Version
4. Standard 8 inch single density disk for all CP/M based computers
$25 for ELIZA.COM—$45 with Microsoft BASIC-80 Source
5. 5¼ inch disk for most CP/M based computers (specify computer)
$25 for ELIZA.COM—$45 with Microsoft BASIC-80 Source

Please add $2.00 shipping and handling to all orders
(California residents please add 6% sales tax)

ARTIFICIAL INTELLIGENCE RESEARCH GROUP
921 North La Jolla Avenue, Dept. B
Los Angeles, CA 90046
(213) 656-7368 (213) 654-2214
MC, VISA and checks accepted

Inquiry 30



Sure it's insured?

SAFEWARE Insurance provides full replacement of hardware, media and purchased software. As little as $35/yr covers:
• Fire • Theft • Power Surges
• Earthquake • Water Damage • Auto Accident

For information or immediate coverage call:
1-800-848-3469
In Ohio call (614) 262-0559

SAFEWARE
SAFEWARE, THE INSURANCE AGENCY INC.

Inquiry 310

Gifford's Multiuser Concurrent DOS.™ The net that works!



Gifford has the network solution. It's simple, fast, secure, complete, and it works. Multiuser Concurrent DOS is based on Digital Research's Concurrent DOS, the only major microcomputer operating system specifically designed for networking.

Users can share disks and printers transparently, and can also take advantage of true multiuser features like file and record lockout. And Gifford has added a bundle of features that makes Multiuser Concurrent DOS easy to install and use. It lets you get right to work.

Our net is ARCNET.™

Multiuser Concurrent DOS utilizes Datapoint's ARCNET, the most popular network hardware in the industry. It's reliable, economical, and fast—so you can add users without overloading the network.

You can network up to 255 single and multiuser systems. You can connect single or multiuser Gifford or CompuPro® systems as well as IBM PC-XTs.® Dual processor Gifford and CompuPro systems can run thousands of 8 or 16 bit CP/M or MP/M applications. PC-XTs can run 16 bit CP/M and MP/M programs as well as most popular MS-DOS applications, such as Lotus 1-2-3.™

Gifford adds to your net worth.

Our enhancements of Concurrent DOS make it possible to get more and better work done in less time. Network-wide features include electronic mail, event calendar, inter-terminal communication, user time accounting and usage report generation, telecommunications, user expandable HELP facility, reminder messages, message of the day, automatic startup and shutdown procedures, and easily prepared files for initializing terminals, printers, and network nodes.

Gifford's Virtual Terminals™ increase productivity by offering full-screen concurrency; you can run up to four programs simultaneously from one physical terminal.



The safety net.

Multiple users can mean multiple security problems. Gifford's security enhancements include login account names and encrypted passwords to control access to the system. Users can be further restricted to specified terminals, user areas, programs, or nodes on the network. You're also safe from excessive down time, since the modular network architecture gives you immunity from single point failure.





Gifford nets a big one: Simplicity.

If you've gone through the ordeal of typing as many as seven commands just to get on and off a network, Gifford has your number. A single, menu-driven network command handles all your network options. Everything you need is right in front of you. The net effect is simplicity—and sanity.



If you'd like to see how Gifford's Multiuser Concurrent DOS can solve your networking problems, or if you'd like to know about Gifford's selection of multiuser systems and software options, call (415) 895-0798.

Or write us at the address below. We'll send you a free networking brochure and give you the name of the nearest dealer.

Multiuser Concurrent DOS is a trademark of Gifford Computer Systems. Concurrent DOS is a trademark of Digital Research, Inc. ARCNET is a trademark of Datapoint Corporation. IBM PC-XT is a registered trademark of IBM Corporation. CompuPro is a registered trademark of CompuPro Corporation. Lotus 1-2-3 is a trademark of Lotus Development Corp. Virtual Terminals is a trademark of Gifford Computer Systems.

GIFFORD COMPUTER SYSTEMS
A subsidiary of Zitel Corporation
2446 Verna Court
San Leandro, CA 94577
(415) 895-0798 TELEX: 704521
Houston, TX (713) 680-1944

THE MULTIUSER COMPANY™

Inquiry 148

R·E·V·I·E·W F·E·E·D·B·A·C·K

MULTIMATE 3.20

The article "Word Processing Revisited" by Janet Cameron in BYTE's *Guide to the* IBM *Personal Computers* (page 165) seriously misrepresents the MultiMate 3.20 Word Processor. We think the reviewer paid our product much too short a "revisit," but that does not excuse or explain the many errors.

The review was obviously done in haste by a writer who was much more familiar with other products mentioned. In addition, this special edition seems to have been more interested in "colorful" writing than clarity or accuracy. That's not what readers expect from BYTE.

First I must correct Multimate's phone number. It is (203) 522-2116.

The article is billed as a "new product" review but is actually a review of a product we replaced in March 1984 with MultiMate version 3.22. (See "Leading Edge and MultiMate" by C J Puotinen, November 1984, page 287.) The overlap of BYTE's publication schedule and our publication schedule was truly unfortunate, but the writer made little attempt to find out if the next version changed the things she criticized. The next release of MultiMate for the IBM will be version 3.3, with proportional-spacing capability, ability to merge data from ASCII files at print time, and other enhancements.

Even the article's simplest descriptions of our package are inaccurate. For instance, the reviewer claimed that an alphabetical list of features was lacking. It is in the manual, on the template, and available from our on-screen help facility. Editing *is* discussed at length before merge printing. There *is* a clear reminder to adjust your contrast controls so you can see on-screen highlighting. We don't know why the review said these things are missing from the manual.

Futhermore, the article is contradictory. The "At a Glance" box contradicts parts of the article on reference materials; the spelling corrector is described favorably at the beginning of the article and unfavorably elsewhere. It is a spelling corrector, not just a spell-check program, and it uses an 80,000-word Merriam-Webster dictionary and an algorithm that recognizes phonetic errors. A British version of the speller is also available.

BYTE's benchmark tests usually are important. This benchmark comparison is not explained at all and could lead readers to the false conclusion that it takes a terribly long time for MultiMate to get around inside a document.

A benchmark test of scrolling through a document with the down arrow is misleading in a review of a Wang-like, page-oriented program. Why not have a test of going to a specific page number? Most programs can't do it, while our GoTo key (F1) lets you jump to page 25 as quickly as to page 2. You rarely scroll between pages, since MultiMate takes time to open and close each page on disk when you scroll past a page break. When you save a document, there is only one page left to save. That's why MultiMate was the *fastest* program for saving a file, which the review barely mentioned.

Next, a few words about features and updates. Version 3.20 was a transitional edition of MultiMate. IBM MultiMate version 3.20 users were given *free* upgrades to the next version—at great cost to this company. The free update mentioned in the article was for that version only, but our update policies are still generous.

Finally, we should mention that the review concerned MultiMate for the IBM PC, while there are different versions of MultiMate for the Corona, Texas Instruments Professional, Tandy Model 2000, Toshiba, and other machines. Some features and policies vary under our OEM (original equipment manufacturer) contracts for these versions.

BOB STEPNO
Multimate International
East Hartford, CT

All the software programs I review for various computer magazines receive the same unbiased treatment. I have no vested interest in any word-processing program and am still seeking the perfect word processor; therefore I have no reason to rate one above or below the others. The experiences I have when I exclusively use a program over a period of several weeks are the results I pass along to the reader. And the results I get are exactly the results I report.

Additionally, I use input from all the 100 or more members of the special-interest word-processing user group of which I am a director. And of all the people with whom I spoke about MultiMate, only one had a kind word to say about the program.

A few points: the review was prepared after a three-month review of the five programs. I studied and used the MultiMate program exclusively for a period of several weeks. When reviewing any software program, I assume the position of an authorized user. This is the best way I know of to discover what other "authorized users" will experience when they call 800 numbers for technical support. I asked the Multimate technical-support person and directly quoted her answer regarding whether the next version would correct the errors noted.

Finally, regarding the table on features and performance on page 181: I asked Multimate's personnel each question, verbatim, from BYTE's desired matrix, recorded their responses on tape, and quoted them verbatim.

JANET CAMERON
Cambridge, MA

I was delighted by Janet Cameron's criticism of MultiMate. I recently wrote several chapters of a book using this monster. I could never understand why it led such a charmed life in the magazines. Anybody who had ever repaginated a lengthy document after using the world's most cumbersome spelling checker would share my bewilderment as they watched their text crumble into garbage before their eyes. Sure I had a backup, but I never dared repaginate again. You have probably experienced the scattered format-line effect. I once found 42 format lines in 16 pages of text. The people from Multimate thought it had something to do with the automatic page break, which they suggested I disable.

I have finally settled on a program that suits me better than any of the alternatives. I call this "choice by elimination" and it would not have been necessary if the magazines had been more forthcom

(continue

PC SOFTWARE SALE!

WE'LL MATCH PRICES ON MOST PRODUCTS

LOTUS 1-2-3/ SYMPHONY $295/$415

dBASE II/III $265/$365

WORDSTAR 2000 $245

LOOK AT THESE SPECIAL PRICES!

AST Products	CALL
Crosstalk	$ 99
dBase II/III	$265/$365
EasyWriter II System	$185
Hayes 1200/1200B	$475/$395
IUS Accounting	CALL
Lotus 1-2-3/Symphony	$295/$415
MicroPro Products	CALL
Microsoft Products	CALL
Multimate	$255
Norton Utilities	$ 59
PFS: File/Graph/Write	$ 83
PFS: Report	$ 74
ProKey	$ 87
Quadram Products	CALL
RBase 4000	$265
SuperCalc 2/3	$145/$195
Volkswriter Deluxe	$175
Wordstar 2000/2000 Plus	$245/$295
Wordstar Prof. Package/Plus	$245/$345
All Other Products/Diskettes	CALL

To order:
Call TOLL-FREE:
800-227-4780 or 415-845-2651

Or write:
ECONOMY SOFTWARE
2040 Polk Street
San Francisco, CA 94109

ECONOMY SOFTWARE

- ☐ We guarantee our products against manufacturer's defects.
- ☐ Quantity discounts available. We are experienced with Corporate accounts.
- ☐ No surcharge added for charge cards. No charges until products are shipped.
- ☐ Purchase orders accepted.
- ☐ Call for shipping charges.
- ☐ Prices subject to change.

VISA MasterCard

ing about these products. The worst thing about my editor is its name; it's called The Idea Processor. [*To be reviewed in an upcoming issue*].

I hope you will continue to write about word processing. Janet Cameron's frankness may persuade others to speak more critically about these products that so many of us are becoming so dependent upon.

R. C. PACKER
Santa Barbara, CA

LILITH PERSONAL COMPUTER

I read with interest the review of the Lilith machine ("The Lilith Personal Computer" by Paul A. Sand, September 1984, page 300). I can agree with most of the author's statements. However, I've got to contradict one of his opinions about the Lara editor. The author states that, to define the font of a piece of text, one has to type its name (Times Roman) each time. This is not true. Quite the reverse is true. We have made every effort to avoid the need (although not the possibility) of *indirect* specification of looks in Lara, be it via keyboard or via a collection of menu entries (as in the Mac).

It is a basic principle of Lara that any looks and even combinations of looks can be copied simply by pointing with the mouse to any location on the display (within the same document or another) where the desired looks are available. This method applies to characters (font, size, offset, underlining, etc.) as well as to paragraphs (formatting mode, margins, etc.).

As a straightforward application of this concept, we mention the use of a *sample document* from where the looks can be copied into the currently edited text. A sample document typically contains a collection of sample characters in different styles, sample titles, and sample, carefully formatted paragraphs. Once having introduced a look in the current text, it can clearly be taken from there.

J. GUTKNECHT
Institut für Informatik
ETH—Zentrum, Zürich,
Switzerland

SAGE II

In reviewing the Sage II computer in "The Sage II and Sage IV Computers" by Allen Munro (July 1984, page 235), the author says that personal computer users who are satisfied with a 64K Z80 system are "letting their current systems set the limits of their imaginations."

Using a powerful 8-MHz 68000 microprocessor and the UCSD p-System, Mr. Munro's Sage runs the Sieve of Eratosthenes benchmark program, compiled from Pascal, in 74.8 seconds. Wow!

I am the owner of one of those pokey 64K Z80 systems. My Z80 runs at a snail-like 2.5 MHz. Using my $49.95 Pascal compiler it takes my system just about half the time (35 seconds) to run the same program.

JOHN D. FOX
Nyack, NY

SANYO MBC-550

I have just finished reading "The Sanyo MBC-550" by Bill Sudbrink (August 1984, page 270) and was delighted to see that this machine is finally being recognized for its great value and performance. We wrote the *Sanyo 550 Series Personal Computer Handbook* which was published in February 1984 and addresses all the documentation issues found to be deficient by these authors. We followed this up with the first newsletter on Sanyos called "The Sanyo Source" to provide follow-up information that fills in the void from Sanyo.

We feel that our services are a valuable addition to the computer.

FRED ZUROFSKY
Computer User Services
230 Anderson St.
Hackensack, NJ 07601

I found the review of the Sanyo MBC-550 in the August 1984 issue both interesting and informative, but I would like to make a few comments.

Sanyo BASIC can access up to four disk drives. For example, to save a program to drive B the correct syntax is, SAVE"B:filename". Note that there must not be a space between the colon and filename. The syntax for LOAD is the same.

To invoke the FILES command in order to view a directory on a disk on a drive other than drive A, the correct syntax is FILES"B:. Closing quotes are not necessary.

The use of CalcStar to compare spreadsheet handling is grossly unfair. On any machine CalcStar runs slower than Multiplan and has not been optimized to take advantage of 16-bit processors.

At least two companies in the U.S.A. are selling versions of MS-DOS for the Sanyo that can format, read, and write single/double-sided, 40/80-track drives. I am currently running two double-sided double-

(continued)

GO FOR THE BEST, REGARDLESS OF COST EVEN IF IT'S CHEAPER.



	THE LEADING EDGE™ PERSONAL COMPUTER	THE IBM® PERSONAL COMPUTER
Display	Hi-res monochrome display standard	Monochrome display—$275. Monochrome controller—$250.
Memory	256K Standard	256K Standard
Speed	7.16 MHz and 4.77 MHz Standard	4.77 MHz Only
Expandability	Expandable to 640K No additional boards	Expandable to 640K Must add two boards
Disk Drives	2—360KB Drives Standard	One Drive Standard Additional Drive—$425.
Battery Backed Clock/Calendar	Standard	Not available from IBM
Ports	Both Parallel and Serial Standard	Serial—$100.
Expansion Slots	7 slots Standard of which 4 remain open after expansion to 640K	5 slots Standard of which none remain open after expansion to 640K
Warranty	One Full Year parts and labor	90 Days parts and labor
Support	Lifetime no charge toll-free hotline Standard. The best in the industry	None on hardware. Software optional at $40 per call.
Service	Nationwide Service Centers	Nationwide Service Centers
Price	$1,995 Complete	$3,110 (Configured as basic Leading Edge PC)

*as of 10-4-84

LEADING EDGE PC: THE GREAT UNKNOWN

LEADING EDGE PRODUCTS, INC.
LEADING EDGE PC AND SYSTEMS DIVISION, 225 TURNPIKE STREET, CANTON, MA 02021. 800-343-6833. (617) 828-8150.
FORTUNE DIVISION, 225 TURNPIKE STREET, CANTON, MA 02021. 800-354-0554. (617) 828-8150.

IBM is a registered trademark of International Business Machines Corporation.

$99.50
PC Switch



Push Button PC Switch lets you connect one computer to two printers, or modems, eliminate forms loading/unloading by keeping two dot matrix printers stocked, or pair one dot matrix printer with a slower Daisy Wheel printer for finished letters. Comes with 1 input panel connector, 2 output connectors on 6' ribbon cables.
Specify either:
Serial: RS-232/D-25, 20 leads switched.
Parallel: Centronics 36 pin/20 leads switched.

HADAX ELECTRONICS
79Hazel St., Glen Cove, NY 11542 (516) 676-3386

Inquiry 155

Introducing . . .
TurboTax™
the ULTIMATE
personal tax program

- IBM PC or 100% compatible
- 33 forms, schedules & worksheets
- *FAST!* Complete return in 3 sec.
- Windows!
- Exceeds IRS print specs.
- Full depreciation support
- 190 page manual
- Much more!
- CA/AZ available in Dec. - $30

Req. 256K $65 plus $5 ship/hand
(CA residents add 6½% sales tax)

ChipSoft, Inc.
5674 Honors
San Diego, CA 92122
(619) 453-8722
(800)621-0852 ext.355
Dealer Inquiries Invited

Inquiry 52

LIONHEART
BUSINESS AND STATISTICAL SOFTWARE

• Exploratory Data Analysis	$ 75
• Experimental Statistics	$115
• Business Statistics	$135
• Forecasting and Time-Series	$115
• Business and Economic Forecasting	$135
• Monte Carlo Simulation	$125
• Linear and Non-Linear Programming	$ 75
• Decision Analysis Techniques	$ 85
• PERT and Critical Path Techniques	$ 75
• Optimization	$ 80

MS-DOS CP/M Apple DOS 3.3 Macintosh

BASIC LANGUAGE UTILITIES (MS-DOS)

• BASIC COMPILER	$150
• PreBASIC	$ 75
• MEMORY	$ 75
• STRUCTURE	$ 75
• QWERTY Word Processor (MS-DOS)	$100

VISA MasterCard Check

LIONHEART
PO Box 379
Alburg, VT
05440
(514) 933-4918

Inquiry 204

density, 80-track drives giving 730K and 112 files under DS DOS-80 from Michtron of Pontiac, Michigan.

TOM DRAKE
Ickenham, Middlesex
England

I recently purchased a Sanyo MBC-1000 using the CP/M 2.0 operating system. I am addressing this letter to you because I need your help. I haven't been able to get any answers to my questions from Sanyo in New Jersey, and Fresno doesn't have any service or sales office for Sanyo computer products.

Today's question was brought on by the inability of the SBASIC interpreter to handle a variable filename. I must resort to using an assembly-language subroutine to perform that function. What I need to solve the dilemma is the address and a description of how the interpreter operates on the BASIC statement: OPEN #1,"0", "FILENAME". I wanted to use FL$ in place of "FILENAME". However, I found that to be impossible on this interpreter. FI$ doesn't work either. I know that it can be done in assembly. But to write my routine, I need something that describes that process. I am not an inexperienced programmer. If I could just be led in the right direction, I can accomplish my goal.

ROBERT S. HUNTER
Fresno, CA

INFOSCOPE

On the basis of George Bond's very good review of Infoscope, the database manager marketed by Microstuf Inc. (June 1984, page 367), I decided to purchase a copy. This program has lots of features that make it fun to play with, but for my purposes it is essentially useless. Why? Because it does not accept real numbers in any form other than as character strings, dollar equivalents, or stock prices. For example, 10.381 cannot be entered as anything but a character string. This means that you cannot obtain sums, averages, or true numeric sorts on this type of data. If 10.381 and 3.506 are sorted as left-justified character strings (which is the only way they can be entered into Infoscope), you get the wrong order. You also cannot safely use "greater than," etc., in selecting records. It is necessary to pad the smaller numbers with preceding zeros (e.g., 03.506) to get everything to work out properly. If you decide to limit yourself to two decimal places in order to get a true numeric field, you are forced to live with the dollar sign, even on printouts.

If you are trying to convert data from dBASE II, Infoscope appears to assume that anything with other than two decimal places is character data and that anything with exactly two decimals is "money" data. What a pain.

All in all, this seems to me to be a rather severe problem with Infoscope. I certainly wouldn't have purchased the product if I had known. Perhaps your other readers would appreciate knowing this.

BRUCE LAZERTE
Baysville, Ontario
Canada

MORROW MD-11

I read with interest the letter from Jim Icenhower (Review Feedback, September 1984, page 356) concerning his experiences with the Morrow MD-11.

After a long search for a computer system that would be both dependable and inexpensive, I purchased a Morrow MD-11 for a pharmaceutical application in one of my drugstores. For about seven months we have been using it about 10 hours a day. It is used for most every function connected with running a retail pharmacy and we have had only one very minor problem that was power-supply related. Shortly after this problem, we installed an uninterruptible power supply for power and more line filtration. As of this date we have not had any additional trouble with this MD-11. I know of three others that are working in other pharmacies in this area and have not heard of any additional trouble. Each uses a very fine program that was written by a local pharmacist who now specializes in computer programs for pharmacies.

The reason I bought the MD-11 system was the price and the software that was included. I invested a total of $7000 in both hardware and software (including the pharmacy program). The starting price of similar systems would be about $14,000.

I feel the MD-11 is a great value—and when I need to computerize my other store it will probably be with a Morrow MD-11.

R. A. MITCHELL
Sumas, WA

REVIEW FEEDBACK is a new column of readers' letters. We welcome responses that support or challenge BYTE reviews. Send letters to Review Feedback, BYTE Publications, POB 372, Hancock, NH 03449. Name and address must be on all letters.

Announcing 4 New Collector Edition

BYTE COVERS

The 4 Byte covers shown below are the newest additions to the Collector Edition Byte Cover series. Each full color print is 11″ × 14″, including a 1½″ border, and is part of an edition strictly limited to 1,000 prints. Each print is a faithful reproduction of the original Byte painting, printed on museum quality acid free paper, and is personally inspected, signed and numbered by the artist, Robert Tinney. A Certificate of Authenticity accompanies each print.

Collector Edition Prints are carefully packaged flat to avoid bending, and are shipped first class within one week of receipt of order. The price of each print is $30. All 4 prints are available for only $100.

Other Collector Edition Byte Covers are also available from Robert Tinney Graphics. For a color brochure, or to order one or more of the prints shown, please check the appropriate box in the coupon below.

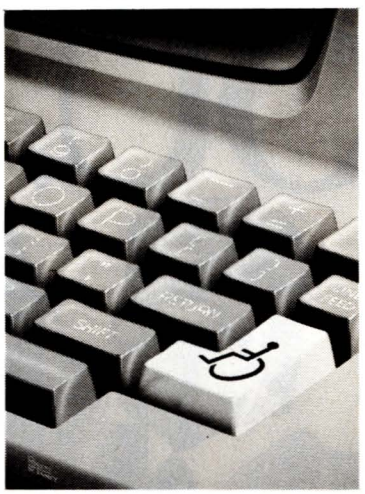

#25 Computers and the Handicapped $30

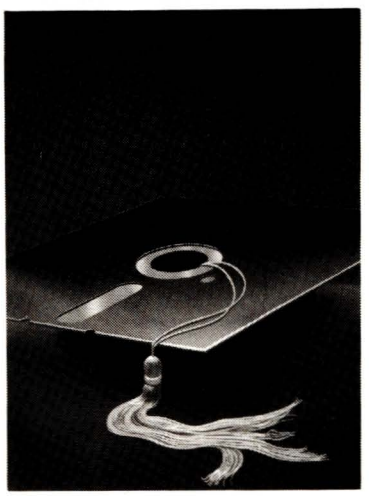

#26 Graduation Memories $30



#27 The Keys to Education $30

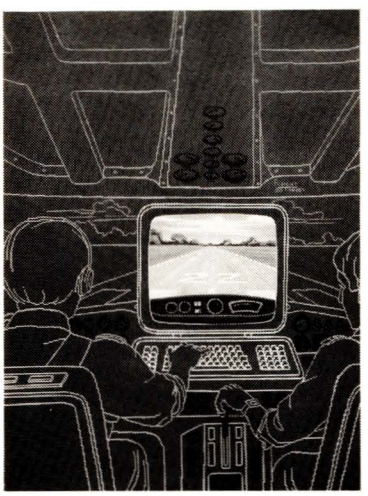

#28 Simulation $30

Please send me the following Prints ($30). All 4 only $100.

QTY.	TITLE & PRINT NO.	AMOUNT
____	_____	$_____
____	_____	$_____
____	_____	$_____
postage & handling $3.00 (Overseas $8.00)		$_____
	TOTAL	$ _____

☐ Please send me your color brochure.

☐ I have enclosed check or money order.

☐ Visa ☐ MasterCard

Card No. _____

Exp. Date: _____

SHIP MY PRINTS (OR BROCHURE) TO:

Name: _____

Address: _____

City: _____

State: _____ Zip: _____

Mail this coupon to:

robert tinney graphics
1864 N. Pamela Drive
Baton Rouge, LA
70815

FOR VISA OR MASTERCARD ORDERS or for more information
CALL 1-504-272-7266
Daytime or Evenings

TOGETHER, STOPPING YOU.



RUN-TIME VERSION AVAILABLE

THERE'S NO

KnowledgeMan™ and You. The possibilities are endless.

To succeed in business, you need a partner that's fast, flexible, intelligent and easy to work with. A partner that can help turn your big ideas into well-conceived reality. One that gives you the support you need to make critical decisions confidently.

No partner can give you more of what you need than KnowledgeMan, the knowledge management software from MDBS.

A powerful partner.

KnowledgeMan helps you manage more knowledge, in more ways, than ordinary software. It can help you make better decisions on just about everything from production scheduling to financial planning to market

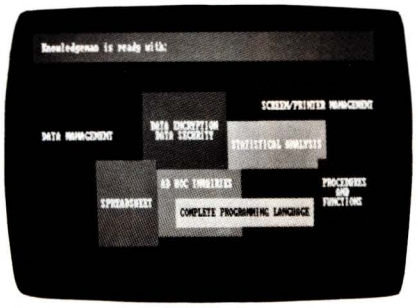

forecasting. KnowledgeMan and its optional components offer data management, spreadsheet analysis, statistical analysis, text processing, forms management, business graphics, programming and more.

The key to KnowledgeMan's versatility is its exclusive synergistic integration, allowing you to accomplish your computing needs within one program. Unlike other software, there's no need to exit one function before entering another. The result: different kinds of processing can be intermingled. Quickly and easily.

A partner that speaks your language.

For all of its power and sophistication, KnowledgeMan is remarkably simple to understand. Even a beginner can start putting KnowledgeMan to work in minutes. With a single query, you can obtain related data from unlimited multiple tables. You can even teach KnowledgeMan to understand your own jargon.

A partner that helps you along.

The on-line HELP facility allows you to draw on 6800 lines of helpful information organized into 380 screens. If you have a problem or question, KnowledgeMan allows you to access the pertinent HELP screen immediately. Each screen is carefully designed to provide a quick reference guide to KnowledgeMan commands.

A partner that gives you room to grow.

Ordinary software packages can be frustratingly easy to outgrow. Not KnowledgeMan. Each KnowledgeMan component has more power than you'll probably ever need—far more than conventional integrated programs. With KnowledgeMan, you don't sacrifice capability, capacity or convenience. So with KnowledgeMan, you spend your time solving problems—not trying to overcome software limitations.

A partner that protects your interests.

KnowledgeMan offers sophisticated security features. Unauthorized access to data is next to impossible, thanks to password checking, thousands of access code combinations and data encryption.

So your secrets are safe with KnowledgeMan.

A partner you can build on.

To add yet another dimension to KnowledgeMan's capabilities, you can get fully-integrated options like K-Graph, an extensive business graphics facility that

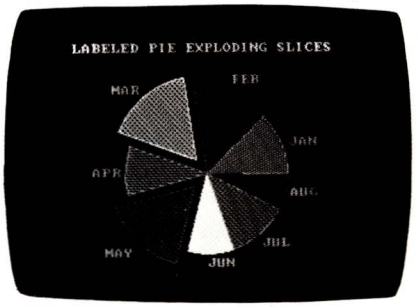

lets you plot information in a variety of colorful graphs, charts and diagrams. For text processing, the K-Text option lets you incorporate data into written documents quickly and easily. Or, create highly-polished, full-color customized forms with K-Paint, our forms painting option. To short-cut the keyboard, put the K-Mouse option to work.

A partner you should get to know better.

To see KnowledgeMan in action, visit your dealer. Or contact Micro Data Base Systems, Inc., P.O. Box 248, Lafayette, IN 47902, (317) 463-2581, Telex: 209147 ISE UR.

It may be the beginning of a long, successful partnership.

Current version is 1.07 as of 9/10/84. KnowledgeMan, K-Graph, K-Paint, K-Text, and K-Mouse are trademarks of Micro Data Base Systems, Inc. MDBS is a registered trademark of Micro Data Base Systems, Inc.

KNOWLEDGE man™

The Knowledge Management Software from MDBS

Operating Systems: PCDOS, MSDOS, CP/M-86. Minimum RAM required: 192K, K-Graph: PCDOS only.



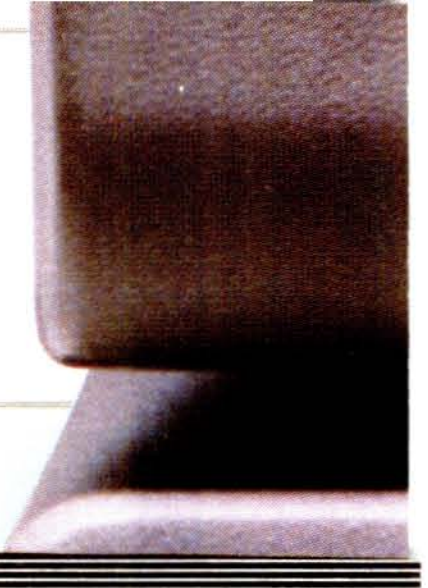

When you *UltraLink*™

PRIORITY ONE ELECTRONICS

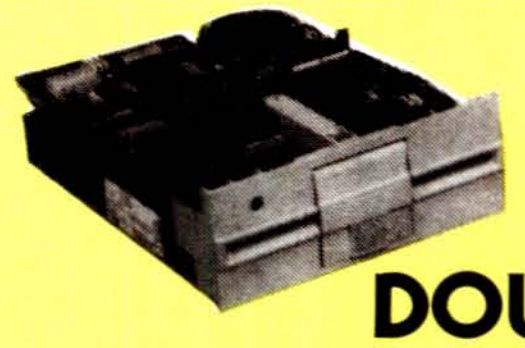

REMEX

5¼" 40 TRACK DOUBLE SIDED/DENSITY ⅔-HEIGHT FLOPPY DRIVES

Tested up to 2mS Track-to-Track Access

EACH	2-9	10+
$59.95	**$49** EACH	**$45** EACH

BRAND NEW - IN FACTORY CARTONS!

BMRMX523 (Sh. wt. 4 lbs. each)

Single & Dual ⅔-Height Floppy Drive Cabinets

BMJMR123 Single-Drive Cabinet (5 lbs.) ***$65.00***
BMJMR223 Dual-Drive Cabinet (7 lbs.) ***$99.00***

5Mbyte Hard Disk Drive SHUGART 604

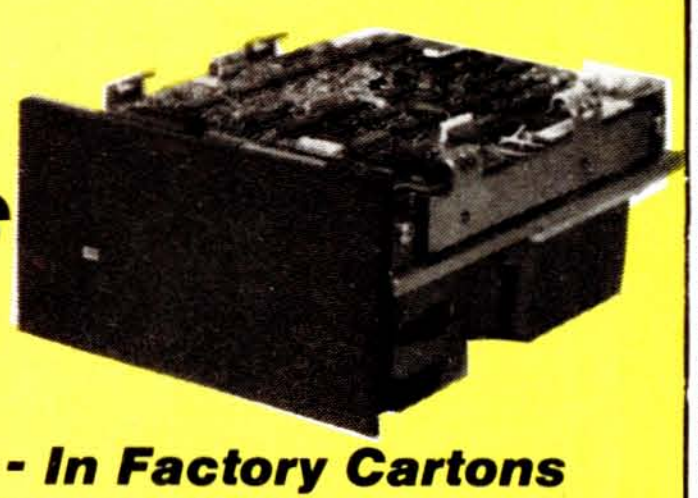

ST506 Compatible - In Factory Cartons
60 DAY WARRANTY!

EACH	2-9	10+
$199	**$189** Ea.	**$175** Ea.

BMSHU604 (Sh. wt. 9 lbs.)

Single & Dual 5¼" Hard Disk Drive Cabinets

BMIIIHD5001 Single Drive Cabinet (16 lbs.) ***$239.00***
BMJMRHDC52 Dual Drive Cabinet (20 lbs.) ***$299.00***

COMPUTER SYSTEMS

MORROW DESIGNS

Description	Part no.	Price
Micro Decision w/5Mbyte hrd disk&terminl	BMPDBMDSMD5	$1999.00
Basic80, SuperCalc, Personal-Pearl, and Pilot software for MD5 above	BMMDSMD11SOFT	$ 350.00

IBM PC™

Description	Part no.	Price
w/dual ½ height floppies & 256K RAM	BMIBMCP0256TEA	$1799.00

IBM PC™ COMPATIBLE ADD-ONs

III Hard Disks with Controllers

Description	Part no.	Price
10MB Internal	BMIIIHDPCI10	$ 749.00
10MB External	BMIIIHDPCX10	$ 895.00
15MB Internal	BMIIIHDPCI15	$ 995.00
15MB External	BMIIIHDPCX15	$1095.00
30MB Internal	BMHDPCI30	$1795.00
30MB External	BMIIIHDPCX30	$1895.00
10MB Streaming Tape Backup	BMIIISTX10	$ 995.00
64K RAM expansion for IBM PC™ contains 9-4164's 1 lb.	BMPDBIBMMEM9	$ 39.00
256K Dynamic RAM chips 150ns 8 or more $29.95 each	BMHM50256P15	$ 40.00

IBM AT™ Compatible Hard Disk Drive

Description	Part no.	Price
33Mbyte hrd dsk formattd QUANTUM 9lbs	BMQTMQ540F	$1595.00

VIDEO CARDS

Description	Part no.	Price
IBM color video card 2lbs.	BMIBM1504910	$ 250.00
IBM Monochrome Card 2lbs.	BMIBM1504900	$ 250.00

MONITORS

Description	Part no.	Price
IBM 12" green screen 18lbs.	BMIBM5151001	$ 275.00
TAXAN 12" green TTL w/cable 18lbs.	BMTAX121	$ 169.00
TAXAN 12" amber TTL w/cable 18lbs.	BMTAX122	$ 179.00
IBM 13" color RGB 28lbs.	BMIBM5153001	$ 680.00
TAXAN 12" color RGB w/cable 28lbs.	BMTAXRGB420	$ 495.00

STB CARDS (2 lbs. each)

Description	Part no.	Price
Super RIO (64K)	BMSTBSRIO	$ 319.00
Super I/O	BMSTSIO	$ 199.00
RIO PLUS (64K)	BMSTBRIOPLS	$ 289.00
Graphic PLUS II	BMSTBGRPLS2	$ 395.00

TECMAR BOARDS

Description	Part no.	Price
The CAPTAIN™ Multi board 64K	BMTECCAPTAIN	$ 259.00
256K Dynamic memory	BMTEC256KDM	$ 219.00
WAVE™ XT Memory board	BMTECWAVE	$ 219.00
GRAPHICS MASTER™	BMTECGRMSTR	$ 499.00
Stepper moter controller	BMTECSTEP	$ 399.00
LAB TENDER™ 8bit D/A & A/D board	BMTECLABTNDR	$ 399.00
LABPAC™ Software support pkg.	BMTECLABPAC	$ 495.00
EXPANSION CHASSIS for IBM PC™ 8slot	BMTECEXPCHS	$ 749.00

HERCULES CARDS

Description	Part no.	Price
High res monochrome card	BMHECGC	$ 339.00
Color card with printer port	BMHECCOLOR	$ 179.00

QUADRAM CARDS (2 lbs. each)

Description	Part no.	Price
EXPANDED QUADBOARD (0 K)	BMQDRQDBRDXPO	$ 239.00
QUADBOARD II	BMQDRQDBRDIIO	$ 229.00
QUADCOLOR I™	BMQDRQDCLRI	$ 219.00
QUADCOLOR II™	BMQDRQDCLRII	$ 449.00
QUAD 512 (64K installed)	BMQDRQD512+	$ 259.00
QUADLINK	BMQDRQDLINK	$ 539.00
Parallel card	BMQDRIPIC	$ 89.00

VIDEO MONITORS

Description	Part no.	Price
SANYO 12MHz 12" Amber 18 lbs.	BMSYODM2212	$ 79.00
SANYO 18MHz 12" Green 24 lbs.	BMSYODM8112CX	$ 129.00
SANYO 18MHz 12" Amber 24 lbs.	BMSYODM8212CX	$ 129.00
TAXAN 18MHz 12" Green 18 lbs.	BMTAX115	$ 139.00
TAXAN 18MHz 12" Amber 18 lbs.	BMTAX116	$ 139.00
SANYO 13" RGB color 7MHz 30 lbs.	BMSYODM7500	$ 379.00
TAXAN 12" RGB color 6MHz 50 lbs.	BMTAX210	$ 319.00

DISKETTES and ACCESSORIES

MAXELL

Description	Part no.	Price
8" dbl/dens single sided 1lb.	BMMXLFD1128M1200	$ 27.50
8" dbl/dens double sided 1lb.	BMMXLFD2XDM1200	$ 34.95

ULTRA MAGNETICS

Description	Part no.	Price
5¼" 40trk sng side box/10 2-5 boxes 18.00 each/ 10 + boxes $16.00each	BMULT51401	$ 19.95
5¼" 40trk dbl side box/10 2-5 boxes 28.00 each/ 10 + boxes $25.00each	BMULT52401	$ 29.95

PRINTERS

EPSON

Description	Part no.	Price
RX80 20lbs	BMEPNRX80	$ 239.00
RX80FT 20lbs	BMEPNRX80FT	$ 279.00
RX100 26lbs	BMEPNRX100	$ 429.00
FX80 20cps	BMEPNFX80	$ 399.00
FX100 26cps	BMEPNFX100	$ 599.00
LQ1500 Ser int. 30cps	BMPDBEPNLQ1500S	$1249.00
LQ1500 Par int. 30cps	BMPDBEPNLQ1500P	$1199.00

OKIDATA

Description	Part no.	Price
82A w/tractor feed 25 lbs.	BMOKIDAT82AT	$ 349.00
83A w/tractor feed 35 lbs.	BMOKIDAT83AT	$ 589.00
84A - parallel 35 lbs.	BMOKIDAT84AP	$ 895.00
84A - serial 35 lbs.	BMOKIDAT84AS	$ 979.00
92A - parallel 25 lbs.	BMOKIDAT92AP	$ 469.00
92A - serial 25 lbs.	BMOKIDAT92AS	$ 610.00
93A - parallel 35 lbs.	BMOKIDAT93AP	$ 699.00
93A - serial 35 lbs.	BMOKIDAT93AS	$ 925.00

MANNESMANN TALLY

Description	Part no.	Price
MT160L 80 col. 21 lbs.	BMTALMT160L	$ 575.00
MT180L 132 col. 28 lbs.	BMTALMT180L	$ 799.00

ABATI

Description	Part no.	Price
18CPS letter quality parallel interface	BMABTLQ20P	$ 349.00

TOSHIBA

Description	Part No.	Price
P1340 serial 30lbs.	BMTSHP1340S	$ 699.00
P1340 parallel 30lbs.	BMTSHP1340P	$ 699.00
P1351 parallel 35lbs.	BMTSHP1351P	$1299.00
Bidirectionl tractor for P1351 6lbs	BMTSHA04003	$ 195.00
Single bin cut sheet feeder for P1351 15lbs.	BMTSHA05002	$ 995.00

STAR

Description	Part No.	Price
Gemini 10X 20 lbs.	BMSTRGEM10X	$ 259.00
Gemini 10X for IBM PC 20 lbs.™	BMSTRGEM10XPC	$ 329.00
Gemini 15X 26 lbs.	BMSTRGEM15X	$ 379.00
Gemini 15X for IBM PC™ 26 lbs.	BMSTRGEM15XPC	$ 449.00
Serial interface for GEMINI X series	BMSTRSERINTX	$ 59.00
Serial interface with 4K buffer	BMSTRSERINTX4K	$ 119.00
COEX 80FT - parallel 21lbs.	BMCOX80FT	$ 179.00

PRINTER BUFFERS

Description	Part No.	Price
64K Microbuffer (serial) 2lbs.	BMPRPMB1S64	$ 249.00
64K Microbuffer (parallel) 2lbs.	BMPRPMB1P64	$ 249.00
Microbuffer II+ for Apple (serial) 2lbs.	BMPRPMB2PLUS16S	$189.00
Microbuffer II+ for Apple (parallel) 2lbs.	BMPRPMB2PLUS16P	$189.00

MODEMS

PROMETHEUS

Description	Part no.	Price
ProModem 1200 baud auto dial/ans 4 lbs.	BMPRMPM1200	$ 329.00
ProModem IBM-PC™ card w/software	BMPRMPM1200B	$289.00
ProModem Apple II card w/software	BMPRMPM1200A	$349.00
ProModem for Macintosh w/cable & software	BMPRMPM1200M	$399.00
Alpha/num display for ProModem	BMPRMDISPLAY	$ 79.00
Options processor for ProModem	BMPRMOPTPRO	$ 79.00
64K Memory exp. for options processor	BMPDBPRMEXP64	$ 59.00

HAYES

Description	Part no.	Price
1200 Baud Smartmodem 4 lbs.	BMDCH0400P	$ 479.00
1200 Baud for IBM-PC™ w/software	BMDCH1200B	$ 429.00
300 Baud Smartmodem	BMDCH0200P	$ 249.00
Micromodem II for Apple	BMDCH701400	$ 249.00

5" Double Sided Double Density Diskettes



$1.60 EACH In Packs of 25
BM5DS25 ($1.60 X 25=$40.00/pack) (Sh. wt. 1 lb. per pack)

$1.40 EACH In Boxes of 250
BM5DS250 ($1.40 X 250=$350.00/box) (Sh. wt. 8 lbs. per box)

$1.20 EACH In Cartons of 1000
BM5DS1000 ($1.20 X 1000=$1200.00/carton) (Sh. wt. 30 lbs.)

These prices are so low, the manufacturer has requested to not be identified

DISK DRIVES

8" DRIVES

Description	Part no.	Price
SIEMENS Single side dbl/density 18lbs. 2 to 5 Drives $110.00 each / 6 or more Drives $99.00 each	BMSIEFDD1008	$ 125.00
WORLD DISK DRIVES Double side dbl/density 18lbs. 2 to 5 Drives $199.00 each / 6 or more Drives $189.00 each	BMWDD2008P	$ 219.00
MITSUBISHI dbl side, dbl dens 18lbs.	BMMITM289463B	$ 375.00
TANDON ½ height sgl side, dbl dens 9lbs.	BMTNDTM8481E	$ 319.00
TANDON ½ height dbl side, dbl dens 9lbs.	BMTNDTM8482E	$ 389.00

5¼" DRIVES

Description	Part no.	Price
PANASONIC 40trk ½ height, dbl side 3lbs.	BMPANJA5512N	$ 149.00
TEAC 48tpi ½ height, dbl side 3lbs.	BMTEA55B	$ 155.00
TEAC 96tpi ½ height, dbl side 3lbs.	BMTEA55F	$ 169.00
TANDON 100-2 40trk full height, dbl side 4lbs.	BMTNDTM1002	$ 199.00

5¼" HARD DISK

Description	Part no.	Price
QUANTUM 42Mbyte Hard disk 9lbs.	BMQTMQ540	$1495.00
TANDON 19.2Mbyte Hrd Disk	BMTND503	$ 895.00
MAXTOR 85Mbyte 30ms access 12lbs	BMMXTXT1085	$2995.00
MAXTOR 140Mbyte 30ms access 12lbs	BMMXTXT1140	$3995.00

S-100 CPU BOARDS

Shipping weight on all S-100 boards 2lbs. each

Description	Part no.	Price
MACROTECH 80286 & Z80	BMMACM1286	$1395.00
CompuPro CPU-Z	BMGBT51060	$ 269.00
CompuPro 8085/88 dual processor	BMGBT51080	$ 399.00
SDS SBC-300 4MHz	BMSDS38095	$ 599.00
SDS SBC-300 6MHz	BMSDS38092	$ 699.00
ADVANCED DIGITAL SuperSix w/floppy controller, 128K RAM	BMADCSUP6128	$ 699.00
ADVANCED DIGITAL 4MHz SBC, 5¼" floppy controller, 64K RAM	BMADCSBC15	$ 595.00
ADVANCED DIGITAL 4MHz SBC, 8" floppy controller, 64K RAM	BMADCSBC18	$ 595.00

S-100 RAM BOARDS

Description	Part no.	Price
CompuPro RAM 16 / 64K	BMGBT52016	$ 249.00
CompuPro RAM 23 / 128K	BMGBT520232	$ 599.00
SDS ExpandoRAM III/696	BMSDS38097	$ 499.00
SDS ExpandoRAM IV	BMSDS38088	$ 825.00
MACROTECH 1 Megabyte	BMMACMAXM	$2195.00
CompuPro RAM 21 / 128K	BMGBT52021	$499.00

S-100 RAM DISK BOARDS

Description	Part no.	Price
CompuPro M-Drive/H® 512K	BMGBT52012	$ 899.00
SDS RAM disk 256K	BMSDS38082	$ 649.00

S-100 I/O BOARDS

Description	Part no.	Price
CompuPro Interfacer 1	BMGBT133A	$ 139.00
CompuPro Interfacer 4	BMGBT53040	$ 349.00
CompuPro System Support 1	BMGBT56010	$ 350.00
SDS 4 port Async. serial	BMSDS38096	$ 449.00
SDS 8 port Async. serial	BMSDS38093	$ 529.00
SDS 8 port 4-Async. 4-sync	BMSDS38094	$ 649.00

S-100 CONTROLLER BOARDS

FOR FLOPPY DISKS

Description	Part no.	Price
CompuPro DISK1 DMA	BMGBT54018	$ 399.00
CompuPro DISK1A DMA	BMGBT54019	$ 549.00
SDS VersaFloppy II with CP/M 3.0™ (a special implementation by SDS)	BMPDBVF2CPM3	$ 299.00
SDS VersaFloppy III	BMSDS38099	$ 599.00
with 5¼" unbanked CP/M 3.0™	BMPDBVF339145	$ 749.00
with 8" unbanked CP/M 3.0™	BMPDBVF339146	$ 749.00
with 5¼" banked CP/M 3.0™	BMPDBVF339147	$ 749.00
with 8" banked CP/M 3.0™	BMPDBVF339148	$ 749.00

FOR HARD DISK

Description	Part no.	Price
CompuPro DISK3 Seagate ST500 series	BMGBT54030	$ 558.95
ADVANCED DIGITAL Seagate 500 compatible	BMADCHDC10015	$ 399.00

DISK DRIVE ENCLOSURES

8" ENCLOSURES

Description	Part no.	Price
ParaDynamics dual desktop 35lbs.	BMPDN2200D	$ 479.00
ParaDynamics dual rack mount 35lbs.	BMPDN2200R	$ 499.00
JMR Dual desktop 30lbs.	BMJMR2C8	$ 229.00

5¼" ENCLOSURES

Description	Part no.	Price
JMR Single 5lbs.	BMJMR1C5	$ 59.00
JMR Dual full height 9lbs.	BMJMR2C5	$ 89.00
JMR Dual full height w/internal data cable 9lbs.	BMJMR2C5C	$ 99.00
JMR Dual half height vert. mount 7lbs.	BMJMR2SV5	$ 65.00
JMR Single hard disk enclosure 16lbs.	BMJMRHDC51	$ 239.00
JMR Dual hard disk enclosure 20lbs.	BMJMRHDC52	$ 299.00

MasterCard 9161 Deering Ave., Chatsworth, CA VISA

PRIORITY ONE ELECTRONICS

ORDER TOLL FREE (800) 423-5922 - CA, AK, HI CALL (818) 709-5111

MINIMUM PREPAID ORDER $15.00. Terms U.S. VISA, MC, BAC, Check, Money Order, U.S. Funds ONLY. CA residents add 6½% Sales Tax. Include MINIMUM SHIPPING & HANDLING of $3.00 for the first 3 lbs., plus 40¢ for each additional pound (20¢ if within California). Orders over 70 lbs. sent freight collect. Just in case, include your phone number. Prices subject to change without notice. We will do our best to maintain prices through January, 1985. Credit card orders will be charged appropriate freight. We are not responsible for typographical errors. Sale prices are for prepaid orders only.

Inquiry 282

ORDER TOLL FREE (800) 423-5922 - CA, AK, HI CALL (818) 709-5111



C·O·M·P·U·T·I·N·G A·T C·H·A·O·S M·A·N·O·R

The Fast Lane

Orchid's PCturbo 186
Documentation
Macrotech's MI-286
More Support Problems
STB RIO Plus Board
The Tax Shelter Eater
Excel's Aris
SuperDex Revisited
Ashton-Tate's dBASE III

BY JERRY POURNELLE

If it isn't one thing, it's another: no sooner did Larry and I get *Footfall* completely done—copied, edited, table of contents, quotes verified, copied again, and off to Judy-Lynne Del Rey—than the phone rang. It was ye editor Phil Lemmons with a request. They're speeding up BYTE's cycle time, getting the magazine out earlier. But in order to do that, I'll have only three weeks each for the next three columns.

The result will be more than worth it, with nearly a month cut off the lag time from when I turn in a column until you see it, but it does mean more scrambling here at Chaos Manor. Oh, well.

Orchids to You

Now that IBM has come out with the AT (advanced technology) machine, a number of IBM PC owners are worried: what will happen to their machines? Can they be upgraded?

I have two bits of good news. First, Dian Girard is doing a book (in the Pournelle Users Guide series) on upgrading your IBM PC; it ought to be out next summer. Second, we have Orchid's PCturbo 186.

Orchid Technology's PCturbo 186 board turns out to be the nicest thing that's happened to our IBM PC in months. We have version 1.1; I'm assured by Orchid's Ron Wiener that version 1.2, and possibly a later one than that, will be available by the time you read this. The new versions will be compatible with even more hardware and allow communications at higher rates. (I also expect Orchid will have redone the documentation by then; on that, *much* more below.)

The PCturbo 186 is a board containing an Intel 80186 chip; ours runs at 8 MHz. After you install the PCturbo board the 186 takes over, with the result that the IBM PC runs about three times as fast. The difference isn't just in computing time, either; the PCturbo allows a certain degree of concurrent operation, so that disk operations go on during computations, thus speeding up I/O (input/output). You will notice that there are other I/O speedups, too.

The 186 is *so* much faster than the 8088 that the disk controller is never waiting because the processor isn't ready for the next sector. I won't explain it here, but if you know what you're doing, you can reformat your hard disk with a smaller interleave factor, speeding things up even more.

You can buy the PCturbo 186 board with as little as 128K bytes of memory on it, but it won't work until you have 256K bytes, and it doesn't really work well until you have more. The software allows a RAM (random-access read/write memory) disk (fooling your computer into thinking that part of the system's memory is a very fast disk) and disk caching, so the PCturbo works best if you completely fill it. The total capacity of the board is 640K bytes.

The PCturbo 186 can't use your IBM PC's regular memory for running programs; only the memory on the PCturbo board is available for use by the 186 chip. However, the regular 8088 in the original IBM PC is still alive and active—it handles most of the I/O for the 186—and it can access whatever memory is available to it. Control is switched back and forth between the 186 and the 8088 through software.

The PCturbo will really shine with a hard or bubble-memory disk, since it can use disk caching. This is a bit different from a RAM disk: in a cache system, the computer watches what you're doing and keeps the stuff you use most often—specifically, the most frequently used disk sectors—in a chunk of memory known as cache memory. Orchid's PCturbo does this automatically; you don't have to understand it to make use of it. The disk cache is kept in the host IBM PC's memory (not in the memory available to the 186), which is why it's best to fill up the PCturbo 186 board with new chips and keep your IBM PC filled as well.

Memory is getting cheap nowadays anyway; California Digital is advertising 4164 chips at $5.25 in quantity 32, $4.95 in quan-

(continued)

Jerry Pournelle holds a doctorate in psychology and is a science-fiction writer who also earns a comfortable living writing about computers present and future.

3,500 Programmers depend on us to find, compare, evaluate products and for *solid value.*

THE PROGRAMMER'S SHOP serves serious microcomputer programmers . . . from giant institutions to small independents. *Specializing* helps us provide 100s of programming products . . . technical literature . . . specialized evaluations and more to help you find and evaluate. Other services like . . . special formats . . . rush delivery . . . payment options (POs, COD, credit cards, etc.) . . . newsletters . . . and reports *help you save time, money, and frustration and get* ***solid value.***

ARTIFICIAL INTELLIGENCE

EXSYS - Expert System building tool. Full RAM, Probability, Why, Intriguing, serious. PCDOS $200

GC LISP - "COMMON LISP", Help, tutorial, co-routines, compiled functions, thorough. PCDOS $475

TLC LISP - "LISP-machine"-like, all RAM, classes, turtle graphics, 8087 for CP/M-86, PCDOS or MSDOS $235

Expert System front-ends for PROLOG: APES ($275), ES/P ($1895)

Other solid alternatives include: IQ LISP ($155), MuLISP-86 ($250), WALTZ LISP for CPM ($159), MicroPROLOG ($275), PROLOG-86 ($125), more.

C PROGRAMMING

C SHARP Realtime Toolkit - well supported, source, thorough, portable, objects, state sys. $600

INSTANT C - Interactive development - Edit, Source Debug, run. Edit to Run - 3 Secs. MSDOS $500

"INTRODUCING C" - Interactive C to learn fast. 500 page tutorial, examples, graphics. PCDOS $95

MEGAMAX C - native Macintosh has fast compile, tight code, K&R, toolkit, .OBJ, DisASM MAC $295

SUPPORT PRODUCTS

BRIEF Programmer's Editor - undo, windows, powerful. PCDOS $195

PERISCOPE DEBUGGER - load after "bombs", symbolic. PCDOS $295

FEATURED PRODUCT:

***The Norton Utilities* - Expanded, Improved**

Recover Lost Data + New Disk Utilities and More

Before a crisis, be in control. Use "the legendary UnErase" or rebuild files with sector by sector control.

Optimize the organization of files on disk or use convenient programs like LinePrint, VolumeLabel, ScreenAttributes.

FileFind, FileSize, TextSearch, DirectorySort and DiskTest increase control of hard disk and floppy content and save you time when you forget where something is.

WipeFile and WipeDisk do what they say - that is security.

You have read about these programs and know they are good. Buy the Norton Utilities before the next crisis!

For most PCDOS or MSDOS systems the Norton Utilities are $99.95. Version 2 is still $80.

NORTON COMPUTING, Santa Monica, CA

"MSDOS Utilities and RAMdisks" will be included free by The Programmer's Shop.



Nobody does it like Norton

For a catalog, comparisons, prices, or for an info packet on AI, or Editors, "C," BASIC, PASCAL, FORTRAN, or COBOL—or just for straight answers—

CALL TOLL FREE 800-421-8006

THE PROGRAMMER'S SHOP™

The programmer's complete source for software, services and answers

128-B Rockland Street, Hanover, MA 02339 In Mass.: **800-442-8070** or 617-826-7531

tity 100 or more. Do recall that it takes 9 chips per bank of 64K bytes, since one is required to store the memory-checking parity bit.

Orchid's software allows caching for floppy disks, but this isn't smart since there's no way for the program to know when you have changed disks. Well, there is a way: you tell it every time you change disks. CP/M users won't find that strange. The problem is that with CP/M if you forgot to do a Control-C after changing disks, you got a BDOS (basic disk operating system) error; with Orchid's cache software, you probably lose all the files on the disk. This is nearly inevitable; after all, the most used sectors on the disk are the directory. If you change disks, the computer is still working with the (newly revised) directory for the *previous* disk, and when it goes to write—well, you get the idea. Best not to use cache memory with floppy disks unless you're *very* careful.

Another great feature of the PC-turbo 186 is that you can also use part of the original IBM PC's memory as a RAM disk. This is all explained in the Orchid installation manuals.

Of course, the manuals are fairly typical: I'm sure they explain how to configure your system for a RAM disk and other such goodies. I'm equally sure that I'll never figure it out. There is a file called OPTION, but when I ran that I got a series of orders about swapping disks, ending with a flashing signal saying "TEST IS GOOD"; that message could be exorcised only by turning the machine off.

The documents have no examples and a profusion of files (TURBO.SYS, RAMDISK.SYS, TURBEXEC.BAT), mostly empty or filled with nonsense; anyway, when you're reduced to typing out disk files for clues, you know you're in trouble. There are "explanations" that seem intentionally designed to be confusing. They show you an example to be placed in a file called CONFIG.SYS, but there is no such file on the boot system disk.

Fortunately, you need not understand any of this in order to get started. There is an Install program that will get the PCturbo system run-

Inquiry 283

ning; alas, the goodies like RAM disks and so forth seem reserved for those who understand Orchid's documents better than I do.

Once you do have it running, it goes well indeed. Most programs work fine with it. The one I've used most, I confess, is Cygnus's Star Fleet I game (I'm up to the rank of Commodore). This program is written in compiled BASICA and has no difficulties at all. The PCturbo 186 board really speeds things up, almost too much for some of the game messages. Because many games need precise timing loops, there's a simple way to drop out of the turbo mode and use your IBM PC in a normal manner.

Orchid provides a long list of programs that are claimed to be compatible with the turbo mode. These include Lotus 1-2-3 and Symphony; all Ashton-Tate software, including dBASE II; and Sorcim SuperCalc. We haven't tested all these; I have run Lotus 1-2-3, and you would not believe how fast the IBM PC with PCturbo will recalculate a spreadsheet.

When you invoke a program that cannot be run with PCturbo—BASICA is a good example—the machine reboots, or tries to. Usually it will succeed, but when I tried to bring up BASICA just now, it never finished running the start-up program; I got several messages, then nothing. Once again, the only remedy was to turn the machine off and back on.

The PCturbo board has a hardware reset button (which I've wished the IBM PC itself had) but only for itself. It doesn't reset the 8088 in the IBM PC, nor does it always work properly; once I got a message telling me to use the reset button on the PCturbo 186 board, but when I did it I was still locked out. The only certain remedy is to turn the power off and on—sigh.

I don't want things to sound worse than they are. I *like* this board. PCturbo runs *fast*. I've been using it with WordStar, which goes fine. WordStar 3.3 with the PCturbo 186 is so fast it scares me. Add Borland's Sidekick—which works *fine* with the PCturbo system—and I have a real temptation.

(continued)

WAREHOUSE DATA PRODUCTS

(Formerly Warehouse Software) **Call for programs not listed**

Technical & Other Information (602) 246-2222

TOLL-FREE ORDER LINE 1-(800) 421-3135

FREE COMPUTER ALARM CLOCK!

In appreciation for another successful year we are giving a program diskette for the IBM PC to all our customers who make a purchase of $100 or more. This program features popup menus and permits continuous or intermittent time display, alarm for appointments, etc. A Bellsoft program with a retail value of $20.

DATA BASE MANAGEMENT SYSTEMS

Fox and Geller Quickcode $145
Knowledgeman $249
Condor III $315
NWA Statpak $265
Tim IV $249
Infostar+ $235
FRIDAY $159
Personal Pearl $215
PFS File $79
Electric Desk $195
RBase 4000 ..... $265
CLOUT $114

WORD PROCESSING

Wordstar, Mail Merge, Correct Star, Star Index for IBM PC $245
Wordstar for IBM PC $185
Leading Edge Word Processor with Merge $85
Mail Merge or Correct Star ..... Call
Microsoft Word With Mouse $284
Word Perfect $225
Volkswriter for the IBM PC $110
Volkswriter DeLuxe $154
Random House Spell Checker $36
PFS Write $78
Multimate $235
Peachtext 5000 ..... $185

SPREADSHEETS

Calcstar $99
Supercalc II $145
Supercalc III $160
Microsoft Multiplan $119
!TK Solver $259
Lotus 123 ..... $294
Symphony $415

ACCOUNTING

TCS. equivalent of Peachtree - Specially augmented by Warehouse Software. Customized for your IBM PC Terminal and Printer - GL, AR, PA, AP, CP/M-80, CP/M-86 for PC XT, DOS 1.1, 2.0. Each Module . . . **$65** .For All Four **$249**

CYMA ..... Call
Dollars & $ence $95
MBSI Accounting (Real World) $350

TRANSFER PROGRAMS

Hayes Smartcom $85
Move-it $70
Microstuff Crosstalk $95

BEST PRICE IN U.S.
FOR IBM PC OR CLONES
Multifunction Board - Includes Async Adapter, Parallel Adapter, Clock with battery back-up and Software, 64K memory expandable to 384K. 1 year warranty $239

LANGUAGES

Lifeboat Lattice C Compiler $295
Microsoft C Compiler $315
Microsoft Pascal Compiler $215
Microsoft Basic Compiler $235
Microsoft Basic Language $225
CP/M-86 for IBM PC $37
Concurrent CP/M 86 ..... $160

FOR PC DOS

PC Paint $85
Norton Utilities $48
Copy II PC $24
Prokey V3.0 ..... $79
Harvard Project Manager $225
Microsoft Flight Simulator $32

HARDWARE

ABC Printer Switch $85
Micro Fazer Parallel $185
Hayes 1200 Modem $475
Hayes 1200b Modem for IBM PC $409
64K RAM Chips (9) 150 NSEC $34
Anchor Signalman 1200 baud Modem $235
10 MB Int. Hard Drive for the PC $850
30 MB External Hard Drive for IBM PC . $1795
10 MB External Hard Drive for IBM PC $1095
Princeton RGB monitor $459
Taxan RGB Vision 425 ..... $425

COMPUTERS

Leading Edge Computer IBM PC Compatible - 2 D/S D/D Drives - 256K Ram Monitor, Software ..... Call

Corona Computer ..... Call
Televideo Portable & Software $1795

BOARDS FOR THE IBM PC OR LOOKALIKES

Color Board with Parallel Port $175
AST Six Pack $264
384K Board with 256K $275
Quadcolor I $185
STB Graphics II Board $335
Tecmar Graphics Master $495
New Quadram Multifunction Board ... Call

PRINTERS

Dot Matrix Printers include a Free $35 Print Set Program ..... Call
Gemini 10X $245
Gemini 15X $345
Okidata 82A, 83A, 93P ..... Call
Okidata 92P $369
Okidata 84P $675
Juki 6100 ..... $389
Call on all Epson Models
Daisywriter 2000 ..... $795
Silver-Reed ..... Call
Diablo 620 ..... Call
Diablo 630 ..... Call
NEC 3550 ..... Call

TERMS: Prices include 3% cash discount. Add 3% for charge orders. Shipping on most items $3.00. AZ orders +6% Sales Tax. Personal check, allow ten (10) days to clear. Prices subject to change.

TOLL-FREE ORDER LINE 1-(800)-421-3135

WAREHOUSE DATA PRODUCTS

2701 West Glendale Ave., Suite 6
Phoenix, AZ 85021

★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★

LOMAS DATA PRODUCTS PRESENTS:

COLOR MAGIC

IBM-PC COMPATIBLE COLOR GRAPHICS FOR THE S100 BUS

COLOR MAGIC brings to the S100 bus a new level of compatibility with the IBM-PC. In combination with our other boards, COLOR MAGIC allows execution of IBM PC-DOS programs without modification. COLOR MAGIC maps to the same port addresses and memory space as the IBM-PC color graphic board.

COLOR MAGIC has the following features:

- 32 K bytes of onboard video memory (The IBM-PC has only 16 K bytes)
- DISPLAY MODES:
  - — 80 by 25 alpha-numeric
  - — 40 by 25 alpha-numeric
  - — 160 by 100 16 color graphic
  - — 320 by 200 4 color
  - — 640 by 200 4 color — 32k version (not supported by IBM)
- RGB and composite video outputs
- Light pen input
- IBM-PC compatible KEYBOARD INTERFACE onboard

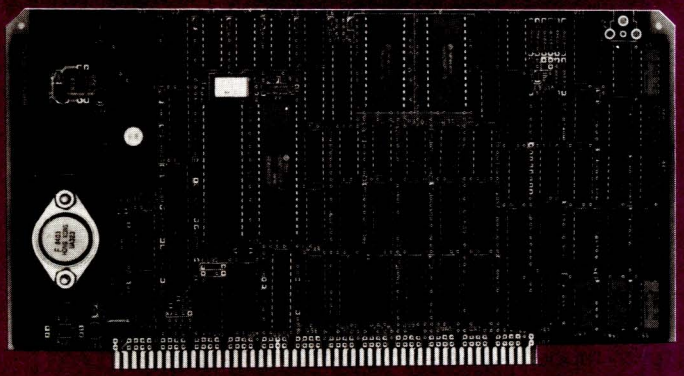

COLOR MAGIC is supported under MS-DOS 2.11 now and will be supported under Concurrent DOS by MAR 1. With COLOR MAGIC in combination with our other high performance boards, you can now configure an S100 bus system with up to 5 times the performance of an IBM-PC and 1.5 times the performance of an IBM-PC/AT. If your application requires IBM compatibility and high performance LOMAS DATA PRODUCTS IS THE ONLY LOGICAL CHOICE.

PRICE....16K VERSION – $595.00, 32K – $695.00

ANNOUNCING MEGARAM:
THE HIGH PERFORMANCE DYNAMIC RAM FOR THE S100 BUS

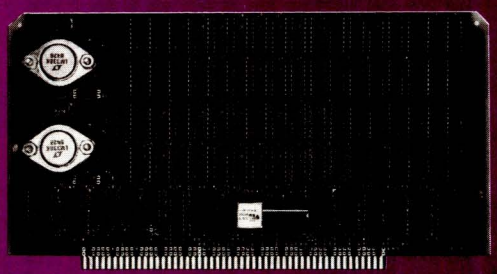

Application programs being written for today's 16 bit computers are requiring more and more memory, while the performance requirements of the memory are increasing as the 16 bit processors require faster and faster access times. MEGARAM has been designed to address this problem and provide FAST, RELIABLE, HIGH DENSITY memory for the S100 BUS. MEGARAM requires no wait states with any of our 8086 (up to 10MHZ) or 80186 CPU boards and only one wait state with our 6MHZ 80286 CPU board. Our board does not resort to piggybacking to attain up to 2 Megabytes of on board memory (piggybacking generally reduces reliability). Parity is included to insure data corruption, due to memory errors, will not go undetected.

256 Kbyte ..... **$595.00** 512 Kbytes **$1095.00**
1Mbyte ..... **$1995.00** — (Feb 1) — 2 Mbytes **$3795.00**

- **LIGHTNING ONE *** 8086/8088 CPU**
  8086 or 8088, with 8087 and 8089 coprocessors. Up to 10 MHZ operation ..... **PRICES start at $425.00**
- **HAZITALL SYSTEM SUPPORT BOARD**
  2 serial, 2 parallel ports, battery protected clock calendar, Hard disk controller host interface ..... **PRICE $325.00**
- **RAM67 HIGH PERFORMANCE STATIC RAM**
  High speed (100ns) low power CMOS static RAM. 128K bytes, extended addressing ..... **PRICE $995.00**
- **LDP72 FLOPPY DISK CONTROLLER**
  Single/double density, single/double sided disks, both 8" and 5 1/4" inch drives simultaneously ..... **PRICE $275.00**
- **LIGHTNING 286—80286 CPU BOARD**
  Offers 4 times the performance of a 5MHZ 8086 CPU while maintaining software compatibility ..... **PRICE $1395.00**
- **OCTAPORT 8 PORT SERIAL BOARD**
  8 serial ports 0 to 19200 baud operation real time clock interrupt. Ideal for multi-user systems such as MP/M-86.* .. **PRICE $395.00**

**CP/M-86, MP/M-86 and CONCURRENT CP/M-86 are trademarks of Digital Research.*
***MS-DOS is a trademark of Microsoft.*
****Lightning One is a trademark of Lomas Data Products, Inc.*
*****PC-DOS is a trademark of IBM.*

Dealer inquiries invited.

LOMAS DATA PRODUCTS, INC. LDP

66 Hopkinton Road, Westboro, MA 01581
Tel: (617) 366-6434 □ Telex: 4996272

For orders outside the U.S., contact our exclusive dealers:

□**Australia** — LAMRON PTY. LTD., (02) 85-6228
□**England** — FULCRUM 0621828763

Prices and specifications are subject to change.

I write a lot. What I use is a customized CompuPro Z80 system running WRITE, a text editor more or less customized by Tony Pietsch for me. It's fast, it's convenient, and I'm used to it. However, my rig does lack some frills.

First, it's an 8-bit system. So far that's no great hardship; there's still plenty of good 8-bit software. However, there's not likely to be much more. The real innovations will go to bigger and more powerful machines, for the simple reason that 8-bit systems cannot, without using kludgey tricks, address more than 64K bytes of memory.

Second, my system doesn't have Sidekick. For those few who don't know, Sidekick is a small demon program that sits up in an IBM PC or PC clone's high memory and provides you at all times with a calendar, notebook, calculator, and other goodies; if you're using an IBM PC without Sidekick, you don't know what you're missing.

My writing system also lacks graphics. I don't have on-screen underlining, on-screen **boldface**, and the like. What I do have is a *big* screen, 15 inches; and because my screen is driven by memory-mapped video (I'll explain in a moment), it scrolls smooth and *fast*. I'll trade all the graphics for that.

Still—WordStar 3.3 with PCturbo 186 scrolls just as fast as my memory map. The blinding speed of that Orchid board takes just about all the sting out of WordStar. The display isn't as good—I still prefer a *big* screen and white on black, not green, letters—but that's fixable. I'm sure someone makes an oversize video monitor that will eat what the IBM PC's monochrome board puts out; which would give me a big, fast screen with graphics goodies.

Bruce Tonkin has written a pretty nice terminal-emulator program for the IBM PC; I could use that to run a number of the other machines we keep here. It's *very* tempting to cut down on the number of screens and keyboards I face daily. I really am tempted to change over, since it's obvious that most of the compatibility problems will be taken care of in new releases of PCturbo software and documents.

Finally, there's ThinkTank, the idea processor. I don't have one for WRITE (or indeed for any 8-bit system), and I hate that; writers who don't use ThinkTank are working too hard. I can use ThinkTank on the IBM PC, then pipe the files across (in our case, we use the wonderful Disk Maker I from New Generation Systems: it not only converts disk formats, but from PC-DOS to CP/M); but it sure would be easier to do it all on one machine.

There are counterarguments. First, I keep hearing tales of a really splendid Concurrent PC-DOS that will run fine with big CompuPro 8/16 machines—and there are ways to speed the CompuPro up. See below.

Concurrent DOS is said to include 99 percent of PC-DOS within it, while letting you run four jobs at once. I would dearly love to be able to run PC-DOS programs, 8-bit programs, and CP/M-86 programs all at once; and even if they never get an 8/16 version of Concurrent PC-DOS, it's still good to be able to do more than one thing at a time. With true concurrency I could not only have the equivalent of Sidekick instantly available, but be using it while long jobs compile.

Tony Pietsch gets back from his European adventure—bicycling from above the Arctic Circle to Munich—this week, and once he's here I'm sure to get one of the new CompuPro IBM PC-compatible video boards. Given Concurrent PC-DOS, I'll have all the advantages of the PC and its PCturbo 186 and get to keep my custom keyboard and 8-inch disks as well.

Another reason I don't change is, alas, Magic Keyboard will not run with PCturbo 186. Magic Keyboard, you may recall, is a program that rearranges the wretched IBM PC keyboard so that the miserable " \ " key becomes a Shift and the infuriatingly placed "~" becomes a Return. (You can get " \ " and "~" by pressing the regular key plus Alt.) I won't use an IBM PC without Magic Keyboard or at least *something* to tame that stupid IBM PC keyboard.

Of course, there is an alternative. The Key Tronic KB 5151 keyboard works fine with both Sidekick and the PCturbo 186, and many will prefer the looks, heft, sound, and feel of the Key Tronic keyboard to the original keyboard supplied with the IBM PC. I happen to like the tactile characteristics of the genuine IBM keyboard (once tamed with Magic Keyboard); getting used to the Key Tronic wouldn't be that hard, but it would have to be done.

It's also possible that I'll get the authors of Magic Keyboard and Orchid's PCturbo together; Magic Keyboard *almost* works as it is, and it shouldn't take that much modification either to it or to PCturbo to take care of things. Orchid's list of compatible software includes Prokey 3.0.

When IBM brought out the AT, it was obvious that I would never want an IBM PC XT, and indeed IBM has pretty well slaughtered the XT market. I did think seriously of ordering an AT. I probably still will, but the Orchid PCturbo 186 board has taken the hurry out of the decision.

Documents Once More

It's always a problem; we get something we like. It works, but the documents are wretched. The publisher is appalled. "We'll fix it! Really! Instantly!"

I even believe it. Now what? This column is built around reports of what we're doing here at Chaos Manor, and if what I've done is fight with a program because I can't understand the documents, then that's what I have to write about; yet I don't like to blast some publisher who really is trying to get his act together.

Oh. Well.

One remedy is obvious; all publishers should heed Pournelle's Law of Documentation: "You can't have too many examples." Take the Orchid PCturbo 186 documents. All Orchid needed to do was furnish several complete examples of systems configured in different ways. "System with two RAM-disk drives enabled, one

(*continued*)

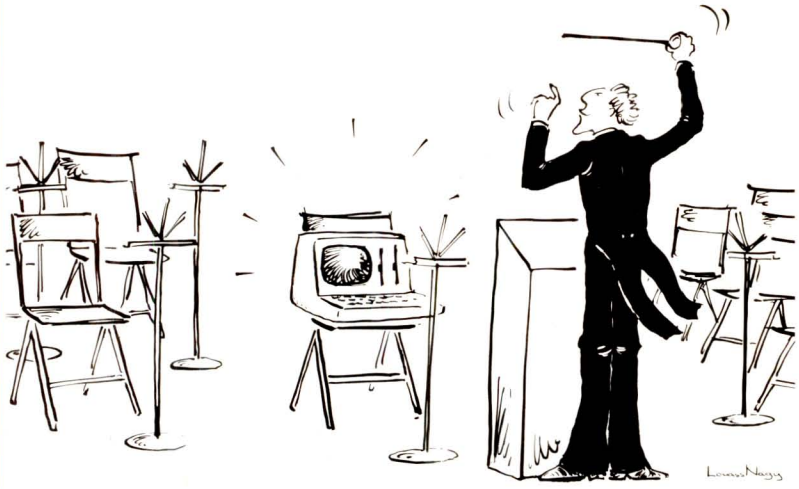

Would you hire an entire band when all you need is one instrument? Of course not.

So why use a whole orchestra of computers when all you need is one to develop software for virtually any type of micro-processor?

The secret? Avocet's family of cross-assemblers. With Avocet cross-assemblers you can develop software for practically every kind of processor — *without having to switch to another development system along the way!*

Cross-Assemblers to Beat the Band!

Development Tools That Work

Avocet cross-assemblers are fast, reliable and user-proven in over 4 years of actual use. Ask NASA, IBM, Xerox or the hundreds of other organizations that use them. Every time you see a new microprocessor-based product, there's a good chance it was developed with Avocet cross-assemblers.

Avocet cross-assemblers are easy to use. They run on almost any personal computer and process assembly language for the most popular microprocessor families.

Your Computer Can Be A Complete Development System

Avocet has the tools you need to enter and assemble your soft-ware and finally cast it in EPROM:

VEDIT Text Editor makes source code entry a snap. Full-screen editing plus a TECO-like command mode for advanced tasks. Easy installation - INSTALL program supports over 40 terminals and personal computers. Customizable keyboard layout. CP/M-80, CP/M-86, MSDOS, PCDOS $150

EPROM Programmers let you program, verify, compare, read, display EPROMS but cost less because they communicate through your personal computer or terminal. No personality modules! On-board intelligence provides menu-based setup for 34 different EPROMS, EEPROMS and MPUs (40-pin devices require socket adaptors). Self-contained unit with internal power supply, RS-232 interface, Textool ZIF socket. Driver software (sold separately) gives you access to all programmer features through your computer, lets you download cross-assembler output files, copy EPROM to disk.

Model 7228 Advanced Programmer —Supports all PROM types listed. Superfast "adaptive" programming algorithm programs 2764 in 1.1 minutes.

Model 7128 Standard Programmer — Lower-cost version of 7228. Supports all PROM types except "A" versions of 2764 and 27128. Standard programming algorithm programs 2764 in 6.8 minutes.

Avocet Cross-assembler		Target Microprocessor	CP/M-80	CP/M-86 IBM PC, MSDOS**
XASM04	*NEW*	6804	$ 250.00	$ 250.00
XASM05		6805	200.00	250.00
XASM09		6809	200.00	250.00
XASM18		1802/1805	200.00	250.00
XASM48		8048/8041	200.00	250.00
XASM51		8051	200.00	250.00
XASM65		6502/65C02	200.00	250.00
XASM68		6800/01, 6301	200.00	250.00
XASM75		NEC 7500	500.00	500.00
XASM85		8085	250.00	250.00
XASM400		COP400	300.00	300.00
XASMF8		F8/3870	300.00	300.00
XASMZ8		Z8	200.00	250.00
XASMZ80		Z80	250.00	250.00
XMAC682	*NEW*	68200	595.00	595.00
XMAC68K	*NEW*	68000/68010	595.00	595.00

Model 7956 and 7956-SA Gang Programmers — Similar features to 7228, but program as many as 8 EPROMS at once. 7956-SA stand-alone version copies from a master EPROM. 7956 lab version has all features of stand-alone plus RS-232 interface.

EPROM: 2758, 2716, 2732, 2732A, 2764, 2764A, 27128, 27128A, 27256, 2508, 2516, 2532, 2564, 68764, 68766, 5133, 5143. **CMOS:** 27C16, 27C32, 27C64, MC6716. **EEPROM:** 5213, X2816A, 48016, I2816A, 5213H. **MPU (w/adaptor):** 8748, 8748H, 8749, 8749H, 8741, 8742, 8751, 8755.

7228	**Advanced Programmer**	**$ 549**
7128	**Standard Programmer**	**429**
7956	**Laboratory Gang Programmer**	**1099**
7956-SA	**Stand-Alone Gang Programmer**	**879**
GDX	**Driver Software**	**95**
481	**8748 Family Socket Adaptor**	**98**
511	**8751 Socket Adaptor**	**174**
755	**8755 Socket Adaptor**	**135**
CABLE	**RS-232 Cable (specify gender)**	**30**

HEXTRAN Universal HEX File Converter — Convert assembler output to other formats for downloading to development systems and target boards. Also useful for examining object file, changing load addresses, extracting parts of files. Converts to and from Intel, Motorola, MOS, RCA, Fairchild, Tektronix, TI, Binary and HEX/ASCII Dump formats. For CP/M, CP/M-86, MSDOS, PCDOS $250

Ask about UNIX.

68000 CROSS-ASSEMBLER — With exhaustive field testing completed, our 68000 assembler is available for immediate shipment. XMAC68K supports Motorola standard assembly language for the 68000 and 68010. Macros, cross-reference, structured assembly statements, instruction optimization and more. Linker and librarian included. Comprehensive, well-written manual.

To find out more, call us toll-free.

1-800-448-8500

(in the U.S. Except Alaska and Hawaii)

VISA and Mastercard accepted. All popular disc formats now available - please specify. Prices do not include shipping and handling - call for exact quotes. OEM INQUIRIES INVITED.

*Trademark of Digital Research **Trademark of Microsoft

AVOCET SYSTEMS INC.

Sales and Development:
10 Summer Street
P.O. Box 490, Dept. 185-B
Rockport, Maine 04856
(207) 236-9055 Telex: 467210 AVOCET CI

Corporate Offices:
804 South State Street
Dover, Delaware 19901

Inquiry 37

200K bytes, the other 100K bytes. Put the following files on the boot disk and include the following file in AUTOEXEC.BAT." List the exact contents of every required configuration file. If there can be problems about switch settings—apparently there can be—include examples of that, too. A few extra pages.

Another thing: Never Assume Too Much. Alex tells me that CONFIG.SYS is an *optional* file, one that is read automatically if included. I didn't know that. Orchid assumed that I had spelunked the DOS manual enough to know such things. Why should I? Will most IBM PC users do so? While I understand the counterargument: "If we assume you know nothing, we must recapitulate everything," examples can't hurt and will generally be enough.

After all, paper is cheap, and if you really understand your product, you're only talking about a couple of days' work having a naive user—someone who really doesn't understand the machine, possibly an engineer's spouse—follow the expert around and *watch* as the system is configured and brought up. A really naive user will ask lots of questions. "What did you just do? Why did you do that?"

Examples are sure cheaper than providing telephone support.

Orchid agrees and has fixed its documents.

MACROTECH'S MI-286

The other reason I don't convert to the IBM PC with PCturbo 186 is that I've been using Macrotech International's Z80h/80286/80287 processor board in my big CompuPro system. You talk about fast! That board is supersonic.

Way back in the dark ages, CompuPro brought out the Dual Processor 8/16 as a painless transition between 8-bit and 16-bit micro systems. The system had an 8-/8-bit 8085, which would run under CP/M 2.2, and a 16-/8-bit 8088, which could be run under CP/M-86. CompuPro and consultants then developed the 8/16 operating system, which let the faster 16-/8-bit 8088 handle disk operations and much of the housekeeping, so that even 8-bit programs ran faster.

When my friend Ezekial the Z80 finally expired, I was strongly tempted to replace him with a System 8/16; the only problem was that the 8/16 was at that time a development system that constantly changed, and I'm sufficiently paranoid as to want something stable when it comes to writing tools. The result was two systems: Zeke II, a CompuPro Z80, and the Golem, a CompuPro System 8/16. System 8/16s are now very reliable, and a lot of businesses use them; but mine, the Golem, remains truly experimental: he's absolutely stuffed with boards, and we often try out new boards and software on him. Zeke II, meanwhile, hasn't had the cover off for nearly two years.

A few months ago Tony installed a CompuPro 40-megabyte hard disk in the Golem. We also installed Tony's latest TMI BIOS (basic input/output system) software, including some revisions to the CP/M command processor. The machine runs with interrupt-driven I/O software and talks to the console at 19,200 bits per second (bps); the only reason we don't use a faster rate is that we've yet to find a terminal that can handle it.

In other words, my 8/16 is pretty advanced machinery.

In midsummer Tom Harincar, president of Macrotech International, came over to Chaos Manor with his new Dual Processor board. The Macrotech board uses an 8-/8-bit Z80h running at 8 MHz and the 80286 for greater-than-8-bit operations. (I don't want to get into the argument about just what the 80286 "really" is, so we'll leave it at that.) What Tom wanted to do was drop his board into the Golem.

"Well, I don't know," said I. "That machine is just chock-full of boards, and Tony has some pretty special software running in it. . ."

"It should be a good test," Tom said. "If my board will run with *your* system, it ought to go with any CompuPro S-100 system."

"Sounds reasonable."

(*continued*)

Inquiry 12

ADVANCED AMERICAN MEMORIES

COMPUTER SYSTEMS

IBM PC 64K, 1 DRIVE	$1395
IBM PC 64K, 2 DRIVE	$1575
IBM PC XT, 1 DRIVE	CALL!
IBM AT	CALL!
COMPAQ 128K, 1 DRIVE	CALL!
COMPAQ 128K, 2 DRIVE	CALL!
TAVA PC 128K, Complete System	$1595
SANYO 555-2	CALL!
SANYO 550-2	CALL!
APPLE IIC	CALL!
MacINTOSH	CALL!

DISK DRIVES

TEAC 55B, 360 KB 1/2 HT	$123
PANASONIC (MATSUSHITA) 360 KB, 1/2 HT	$118
SANYO 360 KB, 1/2 HT	$118
IBM PC-AT, 1.2 M6, DUAL SPEED, 1/2 HT	CALL!
TOSHIBA 360 KB, 1/2 HT	$145
MITSUBISHI QUAD DENSITY 1/2 HT	$149
TANDON TM 100-2	$169
A.M.I. IIc	$175
A.M.I. IIe	$175
IBM COMPATIBLE SS/DD	$90
TRS 80 COMPATIBLE SS/DD	$90
10 Mb HARD DISK W/CONTROLLER	$799

IBM COMPATIBLE PRODUCTS/ACCESSORIES

COMPUTER PERIPHERALS, INC. (ADD ON CARDS)

7-PACK (S,P,C, 0-384K)	$209.95
MULTI-PACK (S, P, C, 0-256K)	$179.95
PCM-1 (0-256K)	$129.95
PCM-2 (0-384K/512K)	$162.50
64K UPGRADE IBM	$39.50
LOCKING DISK FILE (90 CAP.)	$23.95

ADVANCED MEMORIES
187 W. Orangethorpe
Building 1, Unit C
Placentia, CA 92670
(714) 528-4300

MasterCard CA RESIDENTS ADD 6.5% SALES TAX VISA

Availability and prices subject to change without notice.
Not responsible for typographical errors.

Thus started months of experimentation. Tom had brought Frank Nichols, his design engineer, who did the actual work. The first attempt didn't work at all. Nichols wanted to make modifications in my system. I wouldn't let him; we were not, after all, testing his capability to modify a CompuPro system; what I wanted to know was if an unmodified CompuPro system works with the Macrotech board.

The next attempt was closer. The board worked, but it didn't work for long. A month later, another attempt was made: this one worked for several days before it died.

Each time, though, things went smoother and faster.

Just before the World Science Fiction Convention over Labor Day weekend, Tom Harincar and Frank Nichols came back with two of their MI-286 Dual Processor boards. The idea was to take the lid off my CompuPro, remove the CompuPro Dual Processor's processor board, drop theirs in, and turn the system on; it should work.

It didn't, quite. Frank had to do a bit of fiddling. The fiddle, however, was to make a CompuPro-documented revision to the CompuPro System Support board (one of the chips needs to have one of the pins disabled). Once that was done, nothing else was required. My system, with CompuPro memory, CompuPro M-Drive/H, CompuPro Disk Controller and hard disk, and CompuPro I/O boards, running under Tony's unmodified software, works like a screaming bomb. I mean—it's *fast*. The floppy-disk operations take about 80 percent of the time they previously took. Computation using the 80287 math chip is so fast I'm going to have to invent new benchmark software; my reaction times aren't fast enough to time the system using my matrix multiplication "benchmark of sorts."

The 8-MHz Z80h is no slouch, either; all my 8-bit software runs faster, and because it makes use of the CompuPro 8/16 software, CP/M-80 programs have the same increased temporary program area (workspace) they had under the CompuPro processor.

In other words, the Macrotech MI-286 sounds too good to be true.

Bugs, Bugs, Bugs

When I first told Dr. Godbout about the Macrotech board, he said it *was* too good to be true. The Intel 80286 chip has a number of documented bugs; enough that Godbout sells *his* 80286 board as a development system.

When I put that to Macrotech's Frank Nichols, he agreed completely. There are a lot of bugs in presently delivered versions of the 286. "I de-

(continued)

Boldface, underlines, sub and super scripts, and *italics* appear on your PC screen with a color/graphics adapter exactly as they will on paper (with a monochrome adapter, you see boldface and underlines). With StarPolish there are no confusing control characters, like ^B or ^S, to clutter the text and make it difficult to read.

StarPolish's new Help menus remind you of command sequences in terms you understand. And StarPolish puts your function keys to work to make WordStar easier to learn and use. StarPolish also fully supports your dot matrix and ink/laser-jet printers.

To make your WordStar shine for only $125, ask your local dealer about StarPolish or call us today at (301) 340-8700.

T D I

TDI Systems, Inc.
620 Hungerford Drive
Suite 33
Rockville, MD 20850
(301) 340-8700

**StarPolish is a trademark of TDI Systems, Inc. and is a product of Alethic Software Associates.*

WordStar is a trademark of MicroPro International Corporation.

WordStar® with StarPolish™

What you see is what you print

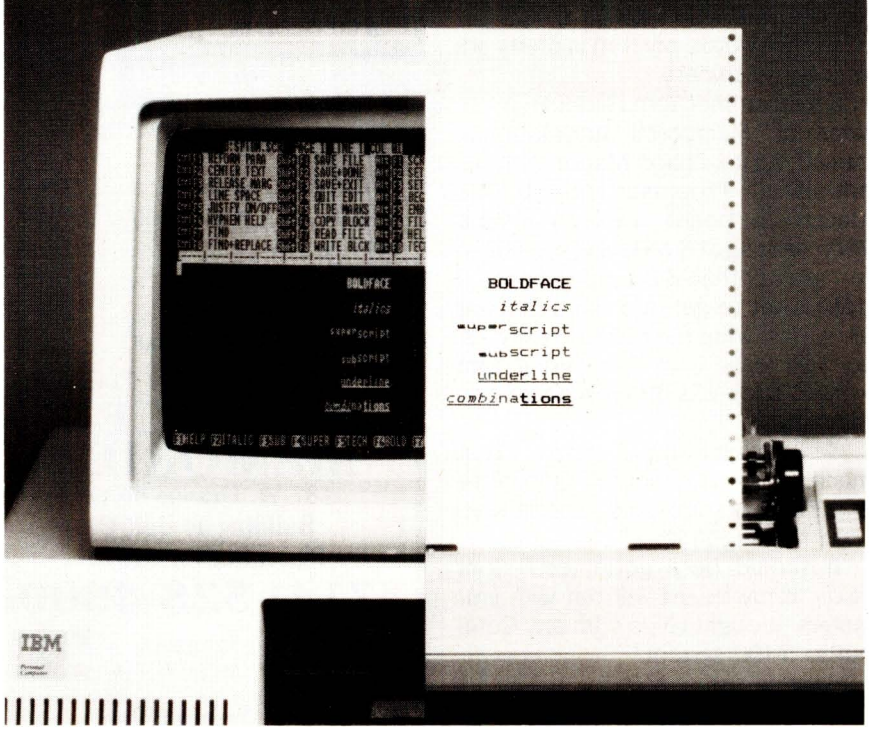

Inquiry 347

Dow it yourself.

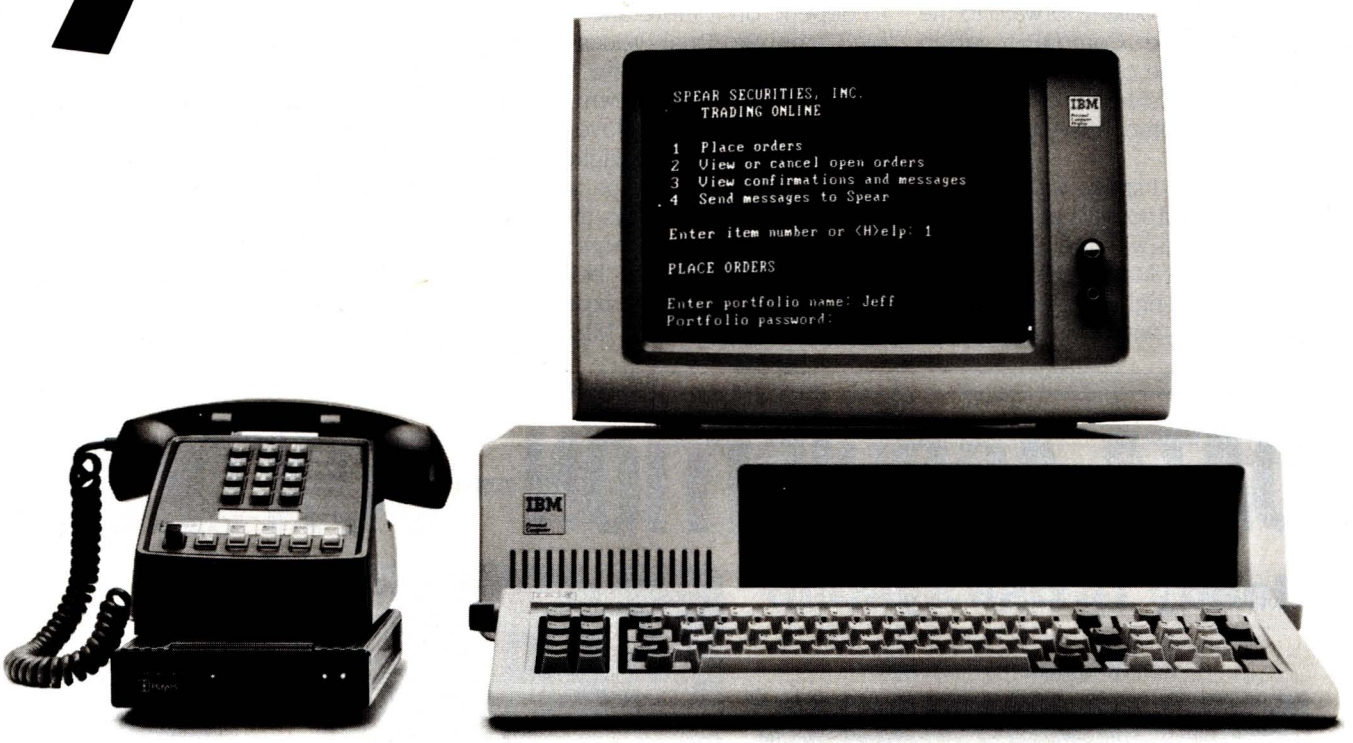

Introducing the most complete 24-hour investment service on the market.

Spear Securities has teamed up with The Source to bring you the most comprehensive personal investment service ever introduced.

Now you can use any personal computer to trade stocks, options or bonds quickly and inexpensively. Without software. But that's not all.

Immediate access to market intelligence.

If you're going to compete with professional investors, you need more than instant trading. That's why we give you the ability to analyze and compare thousands of companies. And we provide immediate access to critical business news and price changes as they occur.

We even take care of your portfolio updating and record-keeping. And your account is protected up to $10 million.*

Get started for $35-a-trade.

Between now and February 28, 1985, most market orders placed with Spear Securities (up to 1,000 shares) will cost only $35 each. After that, you'll enjoy our regular discount rates, which will save you up to 70% on stock transactions compared to full-cost broker commissions.

The coupon on the right will get you all the details. Fast. Our toll-free number is even faster. Just dial **(800) 821-1902.** In California, call **(800) 321-6116.**

*Combination of SIPC protection and private insurance. See brochure for details.
Available exclusively via The Source SIPC Member NASD

SPEAR SECURITIES
The Electronic Investment Center
626 Wilshire Boulevard
Los Angeles, CA 90017

☐ Send me information on how to Dow it myself.
☐ I have a personal computer.
☐ I am currently a member of The Source.

Name _____
Address _____
_____
City _____
State _____ Zip _____
B-I

Spear Securities, a member of the NASD and SIPC, is a wholly owned subsidiary of Investment Resources & Technology, Inc. The Source is a service mark of Source Telecomputing Corporation, a subsidiary of Reader's Digest Association, Inc. The Source services are offered in participation with Control Data Corporation.

signed around them," he said. "And not the way that IBM did with the AT, either. IBM can control the firmware and much of the software environment of the machine. I can't control what the user will do with our board, so I had to put logic on the board to compensate for the bugs."

Tom Harincar and Frank Nichols are proud of their MI-286 board. "It'll eat the IBM PC AT alive," Harincar says. "It's faster by a factor of four to three." He's very much looking forward to the time when the CompuPro video board will come out; that will make a CompuPro system with Macrotech MI-286 truly competitive with the PC AT.

The last time I spoke with Dr. Godbout he was still somewhat concerned about problems with the 286 and not convinced that Macrotech had done everything just right in interfacing the MI-286 board with the rest of the components of a CompuPro system.

I have no right to an opinion based on theoretical analysis. I can testify that I've had the Macrotech MI-286 running for more than a month now. It does spelling checks, runs Logitech's Modula-2 compiler, prints (including the 1000-page manuscript of *Footfall*), drives WRITE and other text editors, does calculations, runs BASIC, drives databases, and runs my accounting system. I've gradually come to depend on it more and more; my big CompuPro Dual Processor is, except for word processing, the most important machine I own; and the MI-286 makes it *fast*. I love it.

There have been no glitches. None. No disk retries, no hiccups, nothing of that sort. Macrotech says the MI-286 will also let you add more users to your MP/M-8/16 system. I believe that, but I have no firsthand experience; I don't use MP/M. The MI-286 sure jazzes up CP/M-8/16.

I'm going to keep using the MI-286. In fact, I'm just about to make an even more serious step: I'm going to convert Zeke II, my writing machine, to a Dual Processor using the Macrotech board. I haven't done that before in part because the CompuPro Dual Processor has an 8085 rather than a Z80, and there is some software—including Charlie Merrit's wonderful trapdoor public-key encryption system—that won't run without a Z80. Systems running under 8/16 have larger workspace and faster disk operations, but even so I've had insufficient incentive to tinker with Zeke II. That 8-MHz Z80h, plus the significantly faster floppy-disk operations, provides one.

So Why Don't You?

Macrotech advertises the MI-286 as "the 20-second revolution" because it takes about this long to change from

DATA ACQUISITION and CONTROL

Ready To Use System

NO PROGRAMMING NECESSARY

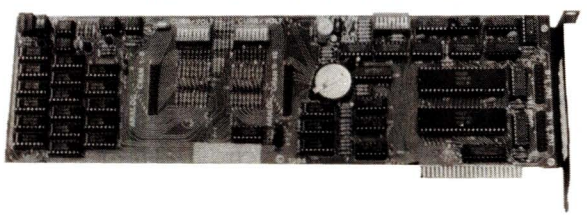

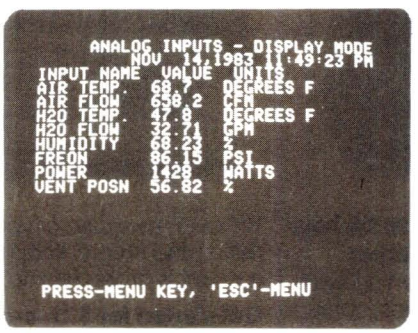



8 to 192 ANALOG INPUTS and 8 to 192 Digital Input/Outputs 2 to 24 Analog Outputs

Comprehensive menu driven SOFTWARE

FREE unlimited assistance from our experts

ANALOG CONNECTION PC for IBM—ANALOG CONNECTION II for Apple

For laboratory research, industrial monitoring and control, environmental monitoring, and energy management. Start datalogging and controlling in just one hour using menus! No programming required. Easily measure temperature, pressure, voltage or current. Most sensors connect directly without special modules. Ranges from 50 mV to 10 volts and 5 to 50 milliamps with 14 bit (0.006%) resolution. Compensation for 10 different thermocouple types included. Starts at $490 for Apple II+ and IIe, $690 for IBM PC and XT for 8 channels.



Inspector Free Soul

IBM PC & XT are trademarks of IBM Corp. Apple is a trademark of Apple Computer, Inc.

Strawberry Tree Computers • 949 Cascade Dr. • Sunnyvale, Ca. 94087 • (408) 736-3083

Inquiry 331

the 8085/8088 processor to it. "That's all there is to it," Macrotech says.

This is essentially true, but— There's always a but.

First, you have to be sure your CompuPro S-100 8/16 system is completely up to specs; if it's not standard—if there are wait states set in or there's been some software compromise with slightly nonstandard hardware—it may take a bit more time and considerably more knowledge to convert your system to the MI-286. That's not inevitable. It's likely to be as easy as the Macrotech advertisements say, and I've heard no complaints about Macrotech's support services. Still, be prepared.

Second, it *must* be an 8/16 system. Zeke II, the machine I'm writing this on, is not; he runs just fine under CP/M 2.2, but he's never been converted to any kind of 8/16 system. You must have the 8/16 software.

Third, you must have fast memory. If you are using (ahem) inexpensive dynamic memory, you must put in so many wait states that it's not worth it. All of the later CompuPro memory—all of the boards marked "816"—will work. Naturally, so will Macrotech's half-megabyte static RAM boards—but the 1-megabyte dynamic board won't work at all.

Fourth, the newest CompuPro software that can accommodate Concurrent CP/M and slave units will not work. You need an older version of the SW!.CMD program.

Fifth, I understand the real bugs in the 80286 chip show up when you have multiple users. If you're using MP/M and more than one terminal, be wary.

Given those cautions, it ought to be easy to convert to the MI-286. Thus, in theory I could simply configure Zeke II to match the Golem and use the same operating system for both.

In practice, it's much more difficult than that.

Remember earlier when I mentioned memory-mapped video? *That's* what Zeke II uses to communicate with me. What this means is that there's a board in there that looks like memory, but it takes what's in those memory cells and displays it on a monitor. Thus, to change my screen image, the software merely writes something new to memory. That's about the fastest operation a computer knows how to do, so the result is great speed in updating the video display.

The "software driver" that tells Zeke II how to do that is built into the CP/M 2.2 BIOS that runs the machine; and although I have the source code to that BIOS, it has been just long enough that I don't want to go hacking around on my own. Tony will be back soon enough, and I can get help from him. I hope.

And, finally, I do have some reluctance to mess about. "If it ain't broke, don't fix it" is awfully good advice. "Better is the enemy of good enough" is another statement I believe with all my heart.

The upshot is that I've got a second Macrotech MI-286 board. Tom Harincar is waiting for me to report that I'm using that board for all my writing. I mean to do it, too. Real Soon Now.

More Than You'll Ever Know...

On the subject of upgrading your IBM PC: Bob Brown, of an outfit called Landmark Software (1142 Pomegranate Court, Sunnyvale, CA 94087, (408) 733-4032), has a book—well, it's more than a booklet, if a bit smaller than a real book—called *About Hard Disks for the IBM PC*. It contains seventy-five 8½- by 11-inch single-spaced pages of solid information. (It's available for $25 plus tax and $2 for shipping and handling.)

Brown promises to tell you "more than you ever wanted to know" about selecting the right hard disk for your IBM PC, and he does just that. The

(continued)



book is written in English, too. Absolute beginners will find it a bit tough sledding; on the other hand, if you're a beginner, it might well pay to buy the book for your adviser. Alex now uses it as our reference work for IBM PC hard-disk problems: it explains things like the mysterious CONFIG.SYS, with its mystical "buffers =" statement; goes through different vendors and their strong and weak points, complete with addresses and phone numbers; and talks about boot ROMs (read-only memories) and the like.

The latest edition even includes IBM PC AT test results. It doesn't cover PC clones, but you can't have everything.

Brown hasn't quite Peter Norton's remarkable talents for explaining the complex with clarity, but he does write real English sentences and doesn't assume all that much. I confess I haven't read the whole book—it's not light reading—but I'm very glad we have it, and both Alex and I have no difficulty recommending it.

THE SUPPORT PROBLEM REVISITED

Digital Research's people continue to provide free support for their products; they just don't do it by telephone any longer. If you want telephone support, you must subscribe to their Technical Support Service. Otherwise, use mail.

This doesn't seem unreasonable.

The support problem is a sticky one, particularly for companies that publish operating systems intended for a wide variety of machines. It's just not very easy to explain BDOS calls and how to hack a BIOS; there are whole books on those subjects, and reading one of those books, or otherwise conducting basic education classes in computer programming, is a pretty expensive proposition by telephone.

In the old days when most computer users were hobbyists, it made some sense for manufacturers to provide direct support; now, alas, I think we've outgrown that. There's no help for it: dealers will have to be the intermediaries. There are just too many users for Digital Research, or CompuPro, or Cromemco, or Microsoft, to provide telephone answerers for.

Pretty soon they won't be able to provide free support by mail, either.

The problem, of course, is that some companies continue to sell direct to the consumer—and thus *are* dealers—and many others have their products sold through discount houses operating on such a small margin that they can't possibly provide support.

If you buy your automobile at $10 above dealer's cost, you don't really expect a lot of help from that dealer, do you? Alas, the computer business has got there as well.

Thus, while I'll continue to try to

(continued)

INTRODUCING VOLKSMODEM 12. PORSCHE PERFORMANCE, VOLKSMODEM PRICE.



$299.

Who says basic transportation for data can't boast sports car performance? Compatible with virtually every personal computer on the market today, our VOLKSMODEM 12 is loaded with today's most desired performance features, and no sticker shock! Auto dial/auto answer. Hayes command structure. 300/1200 baud data rates. And more. With the Volksmodem 12 and one of seven adapter cables you are instantly in touch with the world of data communications.

How can we offer all this at a sticker price that makes the competition cringe? Because we're Anchor Automation, one of the world's leading independent modem makers.

Visit your local computer store, today! Kick the tires. Look under the hood. Compare what you pay with what you get. You'll find the VOLKSMODEM 12 runs away from the pack.

Anchor Automation, Inc., 6913 Valjean Ave., Van Nuys, CA 91406. (818) 997-7758

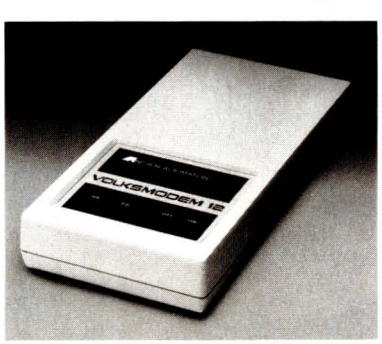

ANCHOR AUTOMATION
A Leader in Modem Technology

© 1984 Anchor Automation, Inc.

Inquiry 23

Make 1-2-3 Look Like 1-2-3½

If you're a Lotus 1-2-3 user, you're already using the state of the art in business software, but if you're using a dot-matrix printer to produce your 1-2-3 graphics, you're living in the Stone-Age of computer graphics.

Produce outstanding 1-2-3 business graphics with the Roland DXY-880 8-Pen Plotter. Why is the Roland DXY-880 better than any dot-matrix printer? For the same reason a Rolls Royce is better than a pick-up truck—both will get you to the dance, but one does it with so much more style.

The Roland DXY-880 produces high-quality business graphics in eight different colors on standard 8½" x 11" or 11" x 17" paper, and draws with a lightning quickness and accuracy that can't be matched by any artist. And because the DXY-880 emulates the Hewlett-Packard graphics language, it has at its disposal hundreds of business graphics and CAD/CAM software packages.

If you do a lot of group presentations, you'll like the fact you can easily produce instant overhead projection graphics just by using acetate instead of paper.

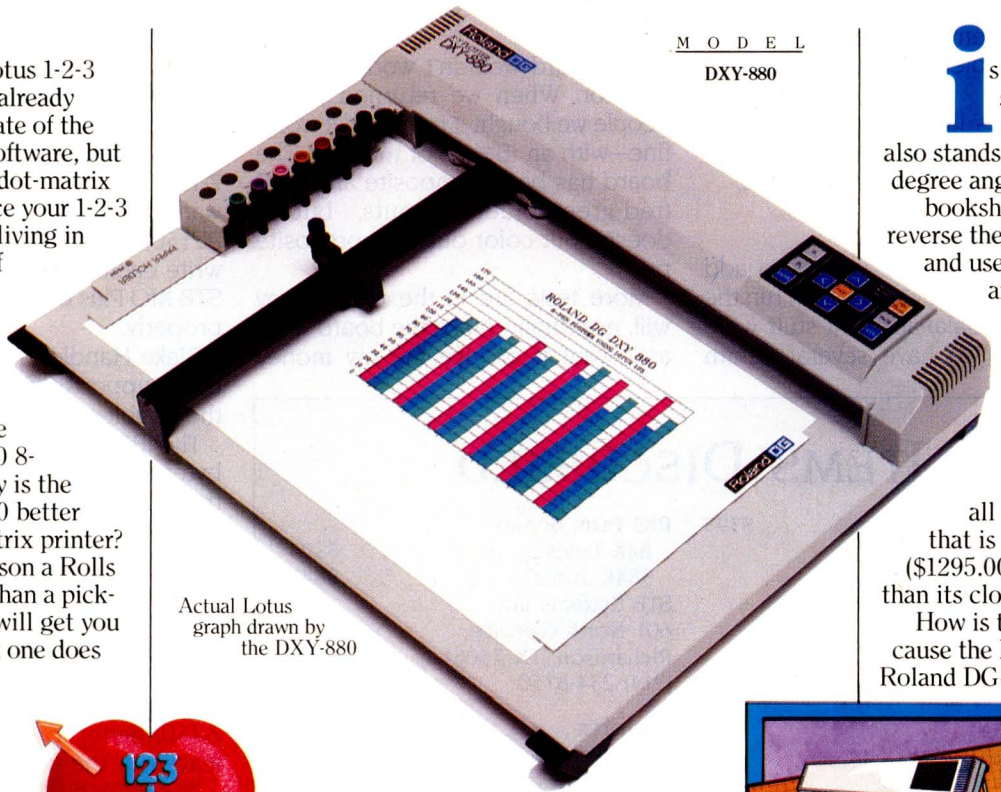

M O D E L
DXY-880

Actual Lotus graph drawn by the DXY-880



Lotus 1-2-3 and Roland DXY are very compatible

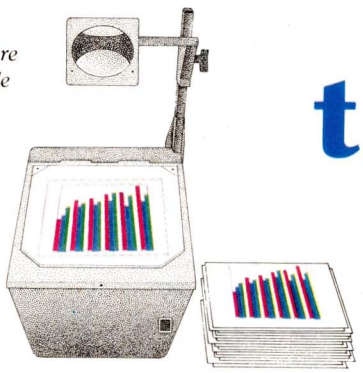

draw your graphics on acetate for instant projection presentation



the DXY can even work on a 9 inch shelf.

Is limited desk-top space a problem? The DXY-880 also stands up to run at a 60 degree angle—perfect for a bookshelf. You can even reverse the plotting process and use the DXY-880 as an input device by activating the built-in multi-speed digitizer. And the best part of all, is that the DXY-880 does all of this for a price that is unbelievably low ($1295.00—hundreds less than its closest competitor). How is this possible? Because the DXY-880 is from Roland DG—the new kid on the computer peripherals block (who's out to make a name for itself by packing innovation, performance, and low-price into every product).

Don't settle for 1-2-3 when you can have 1-2-3½ with a DXY-880 Plotter from Roland DG. Ask for it at fine computer dealers everywhere. Roland DG, 7200 Dominion Circle, Los Angeles, CA 90040 (213) 685 5141.

Lotus and 1-2-3 are trademarks of Lotus Development Corporation, Hewlett Packard is a trademark of Hewlett Packard, Roland and Roland DG are trademarks of Roland Corporation.

Roland DG

help, I will *not* automatically intervene in every problem I get letters about. In the old days I could act as a sort of general ombudsman, and heaven knows I tried; but there are just too many problems, and many of them are not problems I can do anything about.

Pournelle's law: If you don't know what you're doing, deal with those who do—even if that costs more.

For Example...

Some months ago I wanted to add color to my IBM PC. (You can't run the wonderful KoalaPad paint stuff without color.) We have several Zenith ZVM-135 13-inch color monitors—about as good as you can get—so all I needed was a board for Lucy Van Pelt. We bought an STB Graphix Plus board from a discount house.

Alas.

The board wouldn't work with our monitor. When we returned it, the people we bought it from said it works fine—with an IBM color monitor. The board has both composite and RGB (red-green-blue) outputs, but it doesn't put color out the composite port.

More tests are in the works; they will, eventually, make the board work as I want it or give me my money back. I make no doubt I'll eventually have color, so we can hook up the KoalaPad, but so far we've used a couple of months; if I'd gone to a full-price dealer, I expect things would be settled by now.

The Clock Quest Concluded

Last month we reported on our quest for a clock board for Mrs. Pournelle's Z-150 PC clone (the Zenith people want me to call it the Heath/Zenith PC150, but that's just too much to write each time). We had bought an STB RIO Plus board, and it didn't work properly.

Blake Handler, Priority One's technical-support guru, figured out what the problem was.

The IBM PC normally has either 64K bytes or 256K bytes of memory on the motherboard, and the RIO Plus is set to add memory above those addresses. The Z-150 has 320K bytes of memory on its board; consequently, if you pack memory onto the RIO Plus, you must *leave the first bank blank*. (I don't know what would happen if you leave off the top bank on the Z-150; better to populate it fully and leave out the first bank on the RIO.)

The RIO's documents have this, and only this, to say: "Note that memory map 4 requires the memory chips on the RIO Plus board to be installed starting in row #2 if all six rows of memory chips are not implemented." This accompanies a diagram and text of remarkable obscurity; it took the Priority One technicians about two weeks to figure out what was wrong.

The RIO's parallel port must be configured as LPT2. There's also a potential problem with the RIO's serial port: if your Z-150 already has two communications ports, then the one on the RIO Plus board must be disabled. STB sells a chip, PLSNOS, which you plug into the board to accomplish that. This is a PAL (programmable array logic) chip, and you *must* use it if you want to disable the RIO's serial port; that cannot be done with switches. This means that if you want an RIO Plus for your Z-150, or any other computer with two serial ports, you *must*

(continued)

Items Discussed

Aris $395
Excel Systems Corp.
655 Redwood Highway
Suite 311
Mill Valley, CA 94941
(415) 381-4410

CompuPro 8/16 System $5995
CompuPro
3506 Breakwater Court
Hayward, CA 94545
(415) 786-0909

dBASE III $695
Ashton-Tate
10150 West Jefferson Blvd.
Culver City, CA 90230
(213) 204-5570

Elsinore $19.50
Safari $19.50
Magic Keyboard $32.50
Workman and Associates
112 Marion Ave.
Pasadena, CA 91106
(818) 796-4401

MI-286 Processor Board . . . $1395
Macrotech International Corp.
9551 Irondale Ave.
Chatsworth, CA 91311
(818) 700-1501

PCturbo 186 . . . . . from $1095
Expansion Board (128K bytes) to $1970 (640K bytes)
Orchid Technology
47790 Westinghouse Dr.
Fremont, CA 94539
(415) 490-8586

RIO Plus Board
64K bytes $395
384K bytes $845
STB Systems Inc.
601 North Glenville
Richardson, TX 75081
(214) 234-8750

Sprinter $795
Micro Peripherals Inc.
4426 South Century Dr.
Salt Lake City, UT 84107
(801) 263-3081

SuperDex Document-Indexing Software $59.95
Spite Software
13531 SE Foster Place
Portland, OR 97236
(503) 224-0137

Tax Shelter Eater $150
Tax Tech
4038 Coolidge Ave.
Los Angeles, CA 90066
(213) 201-8911

UNIX Pascal Compiler Source Code $7500
AT&T
222 Broadway
New York, NY 10038
(800) 828-8649

Now! Tek quality and expert advice are just a free phone call away!

100 MHz dual time base scope. Easy-to-read CRT; bright, full-sized 8x10 cm; 14 kv accelerating potential complete with BEAM FIND, separate A/B dual intensity controls, FOCUS and TRACE ROTATION.

Wide range vertical sensitivity. Choose from 2 mV/div (1x probe) to 50 V/div (10x probe); color-keyed for 1x and 10x probes; variable control increases scale factor by 2.5 to 1.

Two 100 MHz, high sensitivity channels. 3.5 ns risetime; dc to ≥ 100 MHz bandwidth from 5 V/div to 5 mV/div; extended sensitivity of 2 mV/div at ≥ 90 MHz.

A/B sweep selection. Calibrated A sweeps from 50 ns/div to 0.5 s/div; B sweeps from 50 ns/div to 50 ms/div; variable control for up to 2.5 to 1 reduction and 10x magnification for sweeps to 5 ns/div.

Dual time base measurements. Select either A or B sweeps, or both alternately with A intensified by B.

B trigger slope and level. Use B trigger level to select B-triggered or run-after-delay modes; use B TRIGGER SLOPE to select transitions.

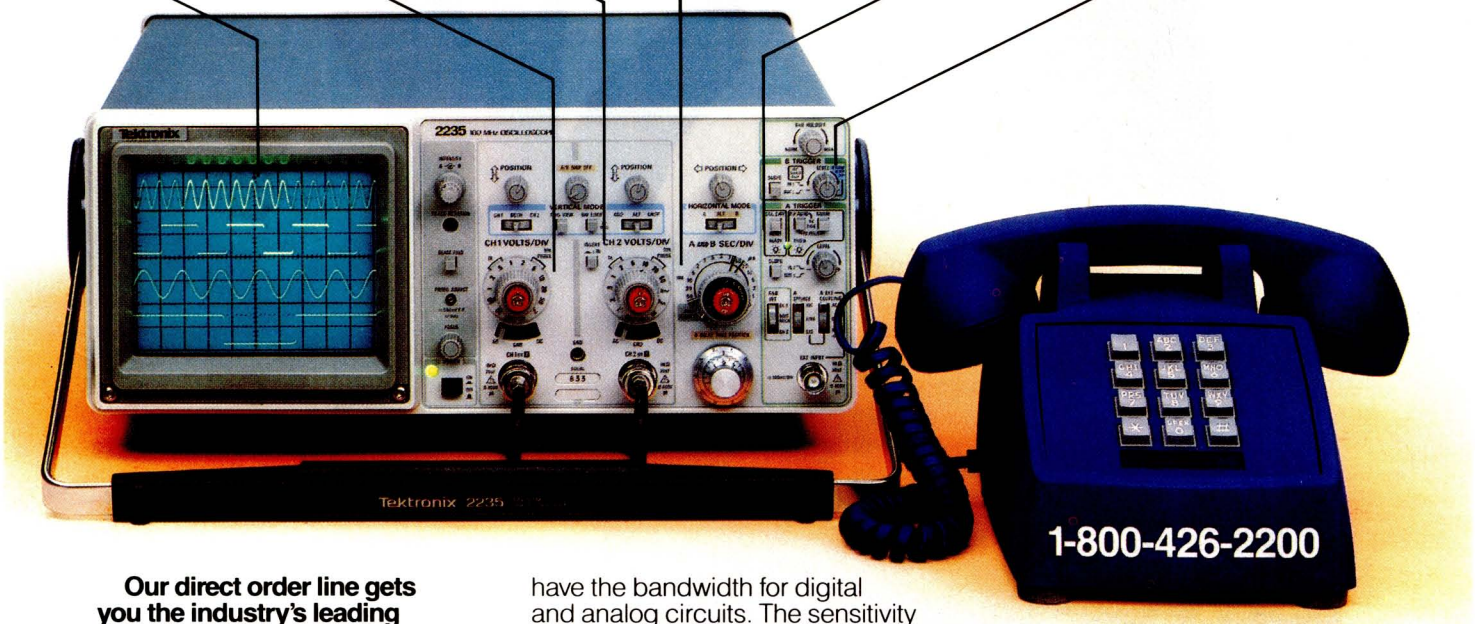

Our direct order line gets you the industry's leading price/performance portables... and fast answers from experts! The 60 MHz single time base delay 2213A, the 60 MHz dual time base 2215A and the 100 MHz dual time base 2235 offer unprecedented reliability and affordability, plus the industry's first 3-year warranty* on labor and parts, CRT included.

The cost: just $1200 for the 2213A, $1450 for the 2215A, $1650 for the 2235.† Even at these low prices, there's no scrimping on performance. You have the bandwidth for digital and analog circuits. The sensitivity for low signal measurements. The sweep speeds for fast logic families. And delayed sweep for fast, accurate timing measurements. All scopes are UL Listed and CSA approved.

You can order, or obtain literature, through the Tek National Marketing Center. Technical personnel, expert in scope applications, will answer your questions and expedite delivery. Direct orders include comprehensive 3-year warranty*, operator's manual, two 10X probes, 15-day return policy and worldwide service backup.

Order toll free: 1-800-426-2200, Ask for Rick.

In Oregon, call collect (503) 627-9000.
Or write Tektronix, Inc.
P.O. Box 500, Delivery Station Y6-088
Beaverton, OR 97077

Tektronix®
COMMITTED TO EXCELLENCE

Inquiry 411

Copyright © 1984, Tektronix, Inc. All rights reserved #TTA-439-1 †Price F.O.B. Beaverton, OR *3-year warranty includes CRT



Any modem can send and receive information.

But what good is a modem if you can't communicate with it?

In plain English.

The Maxwell Modems and George,™ our communications software, let you do just that.

In fact, learning to use them is as easy as reading a menu. Instead of a manual.

All the features make sense. Like auto-dialing directories. Automatic log-on. Auto-answer. Automatic error-checking. And complete unattended operation. Which means you can send and receive files late at night when the phone rates are lower. And you're asleep.

Plus, with single keystroke dialing, you can call a database faster than you can say Racal-Vadic. While the handy mes-

FINALLY, A MODEM YOU CAN COMMUNICATE WITH.

sage editor makes jotting a quick message just that. Quick.

The Maxwell Modems are available in two versions, internal* or desktop. And, now, in three different speeds. 300, 1200 or 2400 bits-per-second. So there's bound to be one just right for you. And your personal computer.

Best of all, they're from Racal-Vadic—the world's leading supplier of switched-network modems. The kind of modems data networks use to take calls from modems like yours.

Just as soon as you get one.

And the easiest way to do that is to call 800-4-VADICS for the name of the Maxwell Modem dealer nearest you.



THE MAXWELL MODEM.™

From Racal-Vadic

™The Maxwell Modem and George are trademarks of Racal-Vadic. *Internal modems for IBM® PC, XT and compatibles. IBM is a registered trademark of International Business Machines Corp. © 1984, Racal-Vadic

order the PAL chip at the same time. In the unlikely event that your Z-150 has only one serial port—two come standard—address the RIO's serial port as COM2.

The RIO Plus has a number of nice features, including the ability to connect two game paddles—Apple game paddles would work. We like the board, but the documents need revision. Rewriting would be better. There's no reason why STB can't explicitly state the potential problems with PC clones.

The memory-conflict problem is likely to be generic for all manufacturers: most PC-compatible boards are going to conform to the IBM PC memory pattern, so Z-150 owners should be wary, as should anyone else with a clone that doesn't have exactly 64K bytes or 256K bytes of memory on the motherboard.

WHY WOULD ANY SANE PERSON SPEND $199 FOR A BetterBASIC SYSTEM WHEN DOS's IS FREE?

HERE ARE 10 REASONS:
TEST YOUR SANITY

1. Full support for 640K memory **2.** Structured language with BASIC syntax **3.** Separately compiled program modules **4.** Speed: FAST **5.** Extensibility (Make your own BASIC.) **6.** User-defined procedures and functions **7.** Built-in windows support **8.** Interactive programming language based on an incremental compiler **9.** 8087 math support **10.** Runs on IBM PC, IBM PC/XT and compatibles

Summit Software Technology, Inc.™
P.O. Box 99
Babson Park
Wellesley, MA 02157
(617) 235-0729
BetterBASIC is a trademark of Summit Software Technology, Inc. IBM PC, IBM PC/XT and PC/DOS are trademarks of International Business Machines Corp. MS-DOS is a trademark of Microsoft Corp.

NOW AVAILABLE FOR THE TANDY 2000 & 1200

Better BASIC™

Sane Programmers Order BetterBASIC Now

Price: $199
8087 Math Module: $99
Runtime System: $250
Sample Disk: $10

MasterCard, VISA, P.O. Checks, Money Orders, and C.O.D. accepted.

SPRINTING

We've mentioned MPI printers before. We're now in a position to state that they're pretty rugged.

Last week Alex hooked up the serially configured MPI Sprinter to the Z-150; alas, he hooked it to the parallel port. It doesn't seem to have hurt anything. Didn't work, of course.

The printer works fine now that it has been connected to the serial port. We did have to swap pins 2 and 3 in the Sprinter's cable; we did *not* have to do that to get it to run on the Otrona Attache.

I've never really understood the RS-232C "standard" connectors and certainly never understood when you have to swap wires in a cable. The only real solution I know of to the problem is to get an RS-232C "breakout box," which looks like a cable with a plastic box in the middle; inside the plastic box are pins and jacks that let you reconfigure the cable. Given one of these, good documents, and plenty of time, you can generally manage to make serial connections, provided the phase of the moon isn't too unfavorable and you hold your mouth right.

DO YOU REALLY NEED SHELTER?

There are about a zillion tax shelters offered for sale. I'm no financial wizard, but all the investment brokers I know counsel lots of caution for those contemplating buying one of these things. The advertisements promise wealth untold and the riches of Croesus, all at the expense of the government; but the realities can be quite different.

Comes now the Tax Shelter Eater.

This is a program by attorney Schuyler Moore, member of a prestigious Los Angeles (Century City) law firm. The version I have runs on an IBM PC; I'm told there's also one for Apple DOS 3.3.

This program analyzes tax-shelter

Inquiry 336

The Tax Shelter Eater analyzes tax-shelter offers.

offers. It does it by asking you questions; if you can't answer those questions, you've no business buying into a tax shelter in the first place. If you got nothing from the program but the questions it asks, you'd probably be ahead.

Alas, that's about all I can say about it. I'm no investment counselor. You don't need a Pepperdine M.B.A. to understand the financial theory that comes with the program, but it wouldn't hurt, either. One of my friends who does have an M.B.A. says it looks like a pretty good program.

I mention the Tax Shelter Eater because I've seen friends get burned by odd tax-shelter investments. If they'd had this program and followed its advice, they wouldn't have. Fair warning, though: for all I know the program might cause you to miss out on a good deal, and I cannot possibly know whether it would reject all the bad ones.

Use it at your risk, not mine.

ARIS

One reason I want an IBM PC-compatible machine is that all the new integrated software is being written for them. I don't know whether Aris is the program I really want to use—there are a lot of them, and I haven't had a chance to test many—but it certainly has many of the characteristics of the "Executive Secretary" program I put on my wish list three years ago.

Aris bills itself as a "personal work processor." It integrates your spreadsheet, a word processor, printing, phone answerer, etc., into one program. It's a desk-replacement program, though—its word processor isn't designed to compete with WordStar, and you use your own spreadsheet. Instead, they are all for "run-

(continued)

The Brand NEW
Fancy Font 2
printed this ad on an Epson FX printer

Letter Quality

Say goodbye to correspondence quality and hello to *Fancy Font*'s high-resolution, proportionally spaced, letter quality. Fonts are available in sizes from 6 to 72 points; styles include Roman, Bold, Italic, Script, Old English, and more. All this on low-cost dot-matrix printers. *Fancy Font* is an easy-to-use software package, developed by SoftCraft, Inc., for IBM PC compatible systems and CP/M systems; no special hardware or installation is required.

New Features Now Available in Version 2

The latest version of *Fancy Font* takes advantage of the phenomenal resolution of the Epson FX and RX printers to achieve laser printer quality. High resolution versions for the Toshiba 1350, 1351, 1340 and the Epson LQ-1500 will soon be available.

This version boasts a greatly expanded set of formatting commands, including word-wrap. Special typesetting features such as kerning and automatic ligature formation are provided by an optional utility.

As part of our library of fonts and utilities we have packages that make *Fancy Font* directly compatible with Microsoft Word, Wordstar and Valdocs; if you know how to use any of these word processors then you already know how to use *Fancy Font*. Alternatively, you can still use almost any word processor to create a text file to be printed with *Fancy Font*.

Numerous Applications

Fancy Font customers are constantly discovering new applications.

- Business and personal letters
- Mailing labels from databases
- Custom forms, invoices, signs
- Foreign Languages
- Mathematical Notation, Greek
- Super- and Sub-scripts
- View Graphs
- Custom Letterheads
- Name tags, badges
- Articles for publication
- Newsletters, brochures
- Complete manuals
- Advertisements
- Resumés, invitations

Create Your Own Characters

Hundreds of fonts are available in our font library, and furthermore, you can create any new characters or logos you like, up to 1 inch by 1 inch. A database of over 1500 characters is included that makes it possible to print foreign languages and mathematical notations.

Font Style Samples

small **large** Bold *Italic*

Sans Serif *Script* Old English

"The quality of print is excellent and the variety of type styles is even better." Pat McKeague, Infoworld 5/2/83

Φ Ψ Ω 𝔅 ℭ б д ж ± ÷ ≠ Ⱪ Ⱬ § ☊ ∮ ∘ ♯ ♭ ♎ ♧ ♡

Trademarks: Fancy Font (SoftCraft), Wordstar (Micropro), CP/M (Digital Research), Valdocs (Rising Star), Microsoft, IBM

Order NOW — (800) 351-0500 — M/C Visa

MSDOS and CP/M versions are available for the following printers: Epson MX FX RX, IBM Graphics, Star Gemini 10X Radix Delta, TI 850 855, Inforunner. MSDOS versions only are available or will soon be available for: Toshiba 1350 1351 1340, Epson LQ-1500, C.Itoh Prowriter, NEC 8023. Specify printer when ordering.

SoftCraft, Inc., 222 State St. #400, Madison, WI 53703 orders: (800) 351-0500
(We've moved from California) from Wisc: (608) 257-3300
Fancy Font System $180 _____
Fancy Font Demo Disk $10 _____
Calif. and Wisc. residents add sales tax 6.5% or 5% _____
Outside US add $10 postage (only $2 for demo) $10 or $2 _____
Diskette Format: (IBM PC, Epson QX10, Osborne DD, Kaypro, 8" CP/M, Apple CP/M, Victor) _____
Printer: (Epson FX, Epson MX, etc.; see box at left) _____
$7.50 of demo cost is applicable towards Fancy Font purchase.
CP/M requires 64K, MSDOS 128K memory.
Fully transparent 8-bit printer interface required on Apple and CP/M.

TAPE WORLD

1-800-245-6000

maxell.

MD-1	5¼", SSDD	1.69	
MD-2	5¼", DSDD	2.39	
FD-1	8", SSDD	2.69	
FD-2	8", DSDD	3.29	

Dysan

104/1D	5¼", SSDD	1.89
104/2D	5¼", DSDD	2.69
3740/1D	8", SSDD	2.69
3740/2D	8", DSDD	3.29

TDK

5¼" SSDD	1.99
5¼" DSDD	2.59

IBM

5¼" SSDD	1.99
5¼" DSDD	2.59

BASF

5¼" SSDD	1.99
5¼" DSDD	2.59

SCOTCH

5¼" SSDD	1.79
5¼" DSDD	2.49

VERBATIM

5¼" SSDD	1.79
5¼" DSDD	2.49

ELEPHANT

5¼" SSDD	1.79
5¼" DSDD	2.49

WE WILL BEAT ANY PRICE!

Prices per case of 10. Shipping 3.75 any size order
Pre-paid, COD, or credit card. COD add 1.65
ALL ORDERS SHIPPED WITHIN 48 HOURS.
Also, TDK and Maxell audio and video cassettes.

220 SPRING ST. BOX 361 BUTLER, PA 16001
412-283-8621 M-F 8:30-5:00

Inquiry 345

Cables
EIA RS 232-C

Send for Catalog

Quality cables with immediate delivery and low prices.

Conductor	Price
1-4	11.50 + .15/ft.
5-7	12.00 + .22/ft.
8-12	13.00 + .30/ft.
13-16	14.00 + .40/ft.
17-25	16.00 + .50/ft.

Specify Male or female connectors, length of cable and pins to be connected. Extended Distance, Centronics (Parallel), Coaxial (RG59U, 62A/U), Dual Wang, Twin-axial, Ribbon, IBM, DEC Compatible cables and AB Switches also available.

We supply connector parts, bulk cable, tools and hardware (wall plates), for those who prefer to build their own cables.

Communication Cable Company
PO Box 600-L, Wayne, PA 19087
215-964-9404

Inquiry 60

COMPUTER T'SHIRTS

FOR HOME, SCHOOL, AND OFFICE!
The ULTIMATE Software!
A MUST for all computer lovers!
BRIGHT GREEN (L.C.D.) LETTERS
CUSTOM SILKSCREENED ON 50/50 BLEND
— HIGH TECH DESIGN! —
Five popular styles to choose from.
Order Today! Only $8.95 ppd.
Made in U.S.A. Simply select Shirt# and Color# below

LET'S SEEK, PEEK & POKE (#1) White #1 Pink #2 Blue #3
TAKE A BYTE OUT OF ME (#2) Green #4 Grey #5 Red #6
I'M USER FRIENDLY (#3) Black #7
HAPPINESS IS A PROGRAM THAT WORKS (#4)
I ♥ COMPUTERS (#5) SIZES S-M-L-XL

CUT

Please send me:
Shirt# ____ Color# ____ Size ____ / Shirt# ____ Color# ____ Size ____
Use additional sheet if necessary

COMPUTER NOVELTY CORP
P.O. BOX 2964
FREEPORT, TEXAS 77541
Enclose $8.95 ppd. each TX Res. 6% tax

or C.O.D. 409 233 4933

NAME _____
ADDRESS _____
CITY _____ STATE ____ ZIP _____

197 ©CNC

Inquiry 77

CenTech
PREMIUM COLOR DISKETTES
LOWEST PRICE EVER

TIMELESS WARRANTY

SSDD $1.65 ea. 5-1/4" QTY. 20 DSDD $2.15 ea.

$2.30 ◄— 96 TPI —► $2.90

Organize your diskette file with the Premium Quality CenTech Color diskettes. Available in red, yellow, blue, orange, green and many other colors.

Shipping: Add $2.50 per 50 or fraction thereof. Quoted prices include a discount for cash. Please add $3.00 handling charge for COD, VISA or Mastercard orders only. Utah residents add 5-3/4%.

FOR FAST SERVICE CALL TOLL FREE:
1-800-233-2477
or 1-800-AFFAIRS

HOURS: 9 AM-6 PM MOUNTAIN STATES TIME

Computer Affairs, inc. 2028 E. FORT UNION BLVD. SUITE 105 SALT LAKE CITY, UTAH 84121

Inquiry 69

STAND-BY POWER SUPPLY

- 200 WATTS
- 10 MINUTE BACKUP TIME
- BATTERY INCLUDED

Fits most desktop and portable computers. Complete, just plug it in. 4-(3 prong) outlets on back protected by line filters. Neat, clean appearance on desk. Don't risk damage or data loss with POWER FAILURES.

MODEL BC200-10

VISA **$299*** MasterCharge

Units available to 1000 Watts

312-490-9239
SHEPHERD MARKETING
P.O. BOX 941339
SCHAUMBURG, IL 60194

*Add $7 each shipping & handling

Inquiry 317

Maxell
Flexible Diskettes

Lifetime Warranty

$1.69 each	5¼" SSDD	$2.20 each	5¼" DSDD

OTHERS AVAILABLE

3½"	SSDD	MF1-DDN	$ 3.50
	DSDD	MF2-DDM (call)	5.75
5¼"	SSQD	MD1-DDM 96 TPI	$ 2.93
	DSQD	MD2-DDM 96 TPI	3.64
	DSQD	MD2-HDM 18M PCAT	5.87
8"	SSDD	FD1-128-M-1100	$ 3.33
	DSDD	FD2-DM-1100	3.67

24 Hour Order Desk

TOLL FREE NAT'L **1-800-634-2248**

Visa, MasterCard, Cert. chk., M/O, C.O.D. cash.
Get immediate shipment. Schools & govt. on P.O. #.
Personal or company checks held 14 days.
APO, FPO, Can. and other non-UPS delivered, add $5.
*Free delivery on minimum orders of $50 or more. Others add $2 for S & H.

Software Services™
1323 23rd St. South, Suite C2, Fargo, ND 58103 1-701-280-0121

Inquiry 322

ning your business life": taking down phone notes, writing a simple letter, balancing payments, etc.

At least, that's what a first glance showed me. There are bugs—especially in the word processor. For instance, you cannot press Return to go to a blank line below unless you are in insert mode. Mode-oriented editors have never been among my favorites anyway.

On the other hand, you can use your favorite word processor; you're not stuck with the one built into Aris.

A few random observations: Aris works much better with a hard disk and lots of memory than with a machine with two floppy disks, but that will be true of all the "executive-assistant" type programs. Alas, there is no single "bailout key" that gets you out of the current function, although Esc comes close. If there are no assignments to print out, Aris says "no matching assignments" instead of "there are no assignments."

Aris provides an interesting contrast to Sidekick. Instead of one program you can call up at any time, Aris is one program from which you can call others. Of course, that means you must use its command structure.

The appointment calendar is called a "diary," and I couldn't find it at first. It's pretty neat and keeps track of time, and work-assignment due dates, and the like.

The Aris documents are obviously preliminary. The manual needs to be typeset, indexed, and longer. It's a good start to a tutorial and manual, but it's nowhere near complete. Excel seems to be primarily concerned with Aris, and the program advertisements say the program was written by the company's President Krista LaBianca, so I expect there will be improvements in both software and documents.

The program comes in fairly elegant packaging. It is *not* copy-protected; the documents urge you to make backup copies immediately. This is a *very* large plus over some of the better-advertised programs.

Aris has considerable promise, but

(continued)

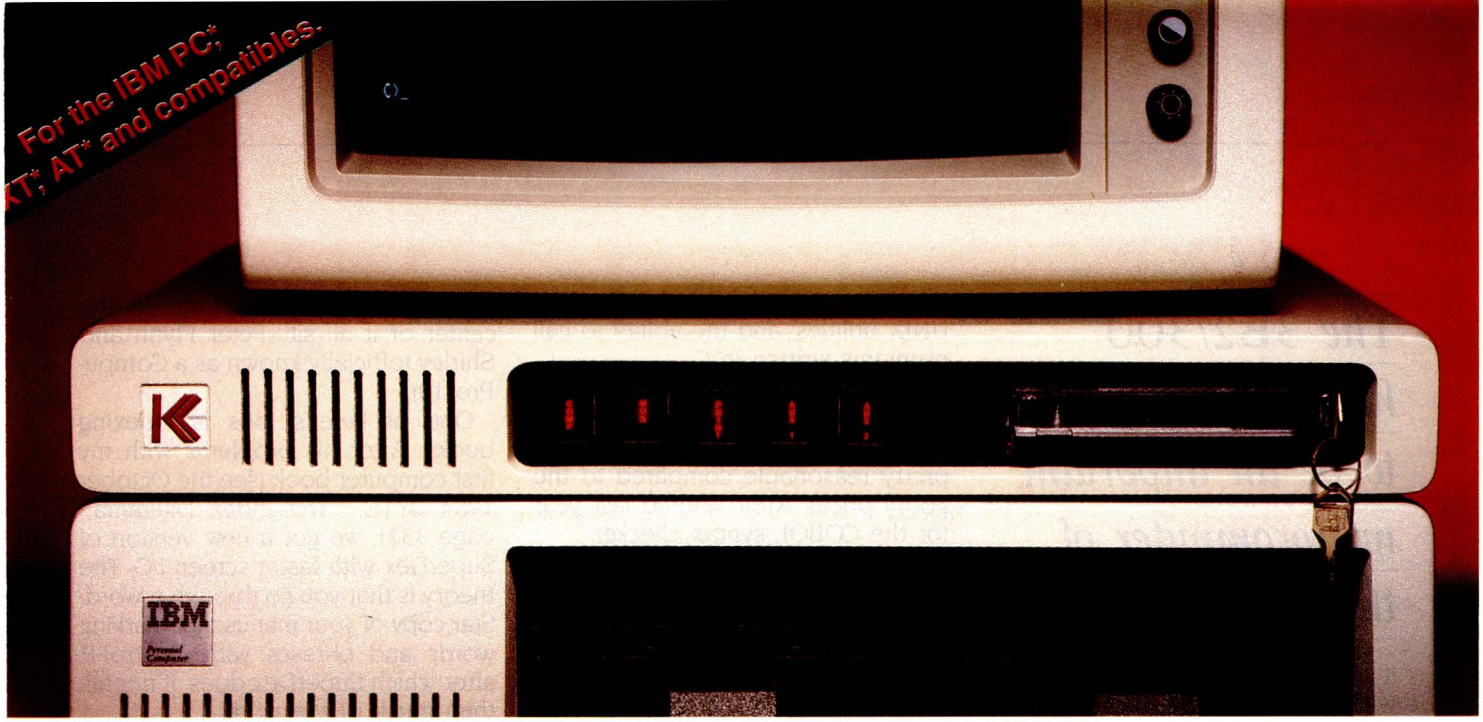

We put hard disk storage and backup where it belongs.

Maximum storage in a minimum space.

A mass storage solution for personal computers need not occupy massive amounts of space.

That's why Kamerman Labs packs an entire hard disk storage and backup system into a package only 2½ inches high.

In fact, our Masterflight system is so well integrated with your PC, it looks like it should have been there all along.

Hard disk storage.

Inside the Masterflight is a high-performance hard disk system, available in 10, 20 or 30 Megabyte versions. You get up to 100 times the storage capacity of floppies. At up to 10 times the speed. Spend more time working and less time waiting.

Streamer tape backup.

Any professional working environment demands a reliable backup solution. The Masterflight provides it through a high-performance streamer tape that backs up an entire 10 Megabytes in less than 4 minutes. Streamer tapes are available in 20, 40 and 60 Megabyte capacities. Instead of just a hard disk, Masterflight gives you a complete data storage solution.

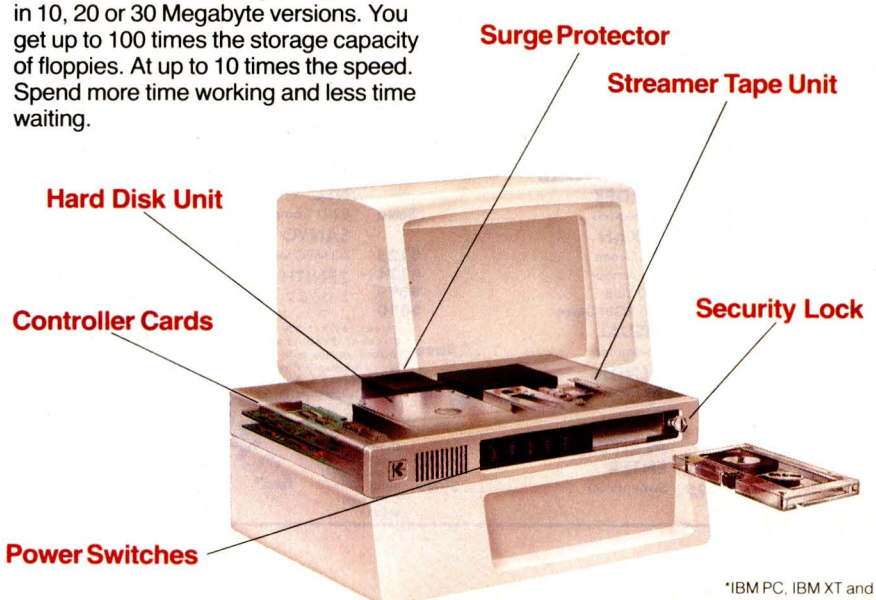

Power control.

Masterflight directs power to your computer, monitor, printer and two other devices through front panel switches. No more blind groping on back panels to power up your system.

Surge protection.

A little power surge can produce a lot of damage. Masterflight protects your system with special circuitry that filters out spikes, surges and line noise.

Security.

Masterflight guards access to your system through a fully lockable power switch.

Phone today. Dealer and OEM queries welcome. 800-522-2237

In Oregon, Hawaii and Alaska call 503-626-6877

Kamerman Labs

8054 SW Nimbus, Bldg. 6
Beaverton, OR 97005
Phone 503-626-6877

Inquiry 192

*IBM PC, IBM XT and IBM AT are registered trademarks of International Business Machines.

The 3B2/300 has the potential to be an important microcomputer of the future.

it needs work. More when I've played with it more or have an update.

Excel says it's doing new documents now.

Well, It's a Step Up...

AT&T recently sent around an announcement of a new UNIX Pascal compiler to run on the AT&T 3B computer series. The compiler is said to have lots of goodies, including separate compilation, hooks into UNIX utilities, and the ability to call programs written in C.

The price for source code is $7500 ($2000 for qualified educational institutions). This isn't cheap, but it's pretty reasonable compared to the goofy prices AT&T wanted last year for the COBOL syntax checker.

I'm less convinced than I was last January, but I still believe the AT&T 3B2/300 has the potential to be one of the most important microcomputers of the future; certainly the more languages AT&T has, the better its chance.

The Back Room

The back room at Chaos Manor is filled with computers: the Apple, an Atari, a Corvus Concept, Zorro the Z-100 with his attached wonderful Disk Maker I that can read and write more than 100 disk formats, and any number of other machines. In the center of it all sits Peter Flynn and Shirley (officially known as a CompuPro 10).

One of Peter's jobs is indexing books. After his problems with my first computer book (see the October 1984 BYTE, "The Index Dilemma," page 332), we got a new version of SuperDex with faster screen I/O. The theory is that you go through a WordStar copy of your manuscript marking words and phrases with Control-P, after which SuperDex does, if not all, then much of the work.

Peter didn't use that approach. Instead, he made a paper copy using WRITE. With our HP LaserJet printer, that's a fairly quick and easy thing to do. Then he brought up WRITE on Shirley and proceeded to page through the paper copy making notes that look like

(*continued*)

ORDER LINE 800-354-7330

FREE SHIPPING

WE PAY THE SHIPPING ON THESE SELECTED PRODUCTS

EPSON RX-100 Printer
OKIDATA 82A Printer
STAR MICRONICS Radix 10 & 15 Printers, Delta 10 & 15 Printers
WYSE 75 Terminal
TELEVIDEO TPC-2 Dual Drive Portable Computer
NEC 2015 Printer
QUME Letter Pro 20 Printer
MAXELL MD-1 Diskettes

Free shipping is by U.P.S. ground only

PRINTERS

BROTHER
DX-15 $369
HR-25 $649
HR-35 $875

C. ITOH
A1-20 $459
8510SP $435
8510SCP $509
8510BPI $335
8510 Prowriter $315
F-10 parallel or Serial $909
55CPS Parallel or Serial $1189

COMREX
CR-II Parallel $339
CR-II Keyboard $129
CRIV $save

DATASOUTH
DS-180 $1149
DS-220 $1469

DIABLO
620 $694
630 API $1499
630 ECS $1669
630 ECS/IBM $1669
Series 36 $1139

EPSON All Printer Models $save
INFORUNNER Riteman $249
JUKI 6100, 6300 $save

PRINTERS

NEC
2010, 2015, 2030 $639
2050 $669
3510, 3515, 3530 $1215
3550 $1359
7710, 7715, 7730 $1649

OKIDATA
All Printer Models $save

PANASONIC
All Printer Models $save

SILVER REED
All Printer Models $save

STAR MICRONICS
All Printer Models $save

TALLY
Spirit 80 $255

TOSHIBA
P1340 Parallel or Serial $719
P1351 Parallel or Serial $1249

DISK DRIVES

RANA
Elite I $215
Elite II $340
Elite III $410

DISKETTES

MAXELL
MD-1 (Qty 100) $175
MD-2 (Qty 100) $225

TERMINALS

ADDS
A-2 $469
A-3 $469
Viewpoint 60 $485
Viewpoint 90 $849

ALTOS
Smart II $699

QUME
QVT102, 103, 108 $save

TELEVIDEO
All Terminal Models $save

WYSE
All Terminal Models $save

MONITORS

AMDEK
All Models $save

TAXAN
121 Green $125
121 Amber $134
420 RGB $399
425 RGB/Green $410

VISUAL
Commuter $save

ZENITH
All Monitor Models $save

PLOTTERS

ENTER
Sweet-P600 $780

Prices reflect 3% to 5% cash discount. Product shipped in factory cartons with manufacturer's warranty. Please add $8.00 for U.P.S. handling and shipping costs. Prices & availability subject to change without notice. Send cashier's check or money order...all other checks will delay shipping two weeks.

MODEMS

HAYES
Smartmodem 300 Baud $189
Smartmodel 1200 Baud $459
Smartmodem 1200 B $389

NOVATION
Smart Cat Plus $315

US ROBOTICS
Password 1200 Baud $309

COMPUTERS

ALTOS
All Computer Models $save

EAGLE
All Computer Models $save

LEADING EDGE $save

NEC
8201 Computer $save

SANYO
All MBC Models $save

ZENITH All Model
Z-150 & Z-160 $save

AMERICAN EXPRESS VISA MasterCard

SILICON SPECIALTIES
2034 WEST SOUTHERN
MESA, ARIZONA 85202
602-969-0909

COMPUTERS ARE CREATING JOBS FOR NRI-TRAINED PEOPLE.

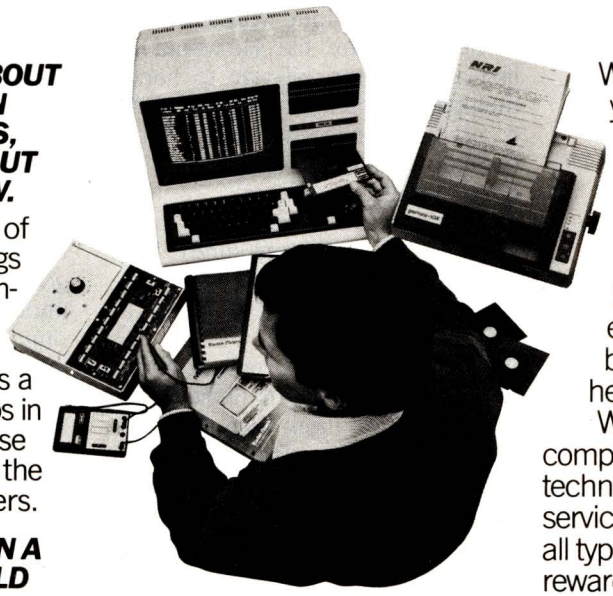

IF YOU'RE SERIOUS ABOUT MAKING MONEY IN MICROCOMPUTERS, NRI IS SERIOUS ABOUT SHOWING YOU HOW.

The U.S. Department of Labor projects job openings for qualified computer technicians will soon double. International Resource Development, Inc., estimates a 600% increase in these jobs in a decade. And most of these will be new jobs, created by the expanding role of computers.

NEVER HAS THERE BEEN A FASTER-GROWING FIELD OF TECHNOLOGY.

Many people are afraid of losing their jobs to computers, but thousands of jobs will be created for those who are prepared to meet the challenge.

With NRI training, you'll be prepared. You can have a profitable, exciting future as an expert who can handle the operational, programming and technical aspects of all kinds of microcomputers and microprocessors.



Your NRI course will include the TRS-80 Model 4 with Disk Drive, the Gemini 10X dot-matrix printer plus a professional LCD multimeter. NRI Discovery Lab and hundreds of demonstrations and experiments. It's all yours to keep.

LEARN IN YOUR SPARE TIME.

NRI trains you in your own home, at your convenience...no classroom schedules to meet, no need to quit your job. As a class of one with complete course materials and the backing of a staff of professional electronics instructors, you'll get extraordinary hands-on training on the latest, most popular microcomputer: the new TRS-80™ Model 4 with Disk Drive. Designed to perform diverse personal and business functions and accept more software, the TRS-80 is yours to keep.

LEARN HOW TO USE, PROGRAM AND SERVICE STATE-OF-THE-ART MICROCOMPUTERS.

Through your carefully designed NRI course, you'll get a wealth of practical experience. You'll build circuits...from the simplest to the most advanced ...with your NRI Discovery Lab.® You'll use a professional 4-function LCD digital multimeter for analysis and troubleshooting.

With NRI training you'll explore your computer's registers, memory and input-output ports. You'll even write programs to control the circuits you've designed and built. You'll perform hundreds of challenging experiments, always backed by a full-time faculty ready to help you personally.

When your NRI training is complete, you'll be a computer technician, ready for your first job—servicing, testing or programming all types of microcomputers—in a rewarding and challenging new career.

THE CATALOG IS FREE, THE TRAINING IS PRICELESS.

Send the postpaid card today for your FREE 100-page catalog.

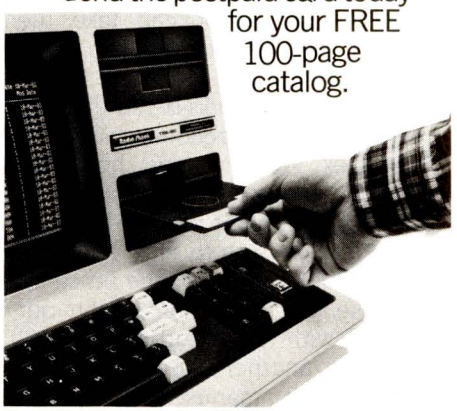

For greater computer memory capacity, a double density disk drive is included.

It's a valuable guide to opportunities and training in the high-tech revolution. You'll see how easily you become part of the growing high-tech world of microcomputers.

If the card has been removed, please write to us today.

NRI SCHOOLS

McGraw-Hill Continuing Education Center

3939 Wisconsin Avenue, N.W.
Washington, D.C. 20016

We'll give you tomorrow.

TRS-80 is a trademark of the Radio Shack division of Tandy Corp.

The copy protection of dBASE III puts a number of bad sectors on the disk.

P>Major Heading
S>Subheading
@>57
P>another major head
@>57
P>Yet another major
S>corresponding minor
@>60

and so forth. This creates the "raw index" file wanted by SuperDex; the program takes it from there and prints out quite a nice-looking index keyed to the paper copy. Now our publisher's copy editor can take the typeset page proofs and our index and finish the job.

Peter says this works better than the primary method recommended by SuperDex. For one thing, he would have to convert from a series of WRITE files into one big WordStar file; and WordStar is pretty slow even running on Shirley. (Next time he can, I suppose, use WordStar 3.3 on our IBM PC with the PCturbo 186; we'll see.) For another, simply scrolling through the manuscript marking pages won't give you an index entry for, say, "future of computers" on a page that never actually uses that phrase.

As Peter notes, what he's doing is a bit like the old-fashioned method of indexing with a card-file box, but using the computer to write the card entries, file them, sort them, then format and print out the index; much easier. He does wish he had a program that would give him a current list of indexed words and phrases. (Of course, he can from time to time print out the partial index already made, but it won't be on line—ha! Phrases it won't do, but The Word Plus has a program that will make an alphabetized list of unique words; aim that at the "raw index" file.) He would also like a computerized way to handle multiple listings, as, for example, each computer to be indexed under its own company name as well as being subheads under "computer."

Indexing is still as much art as science, but computers sure make it a lot easier.

Go for It

We just received a new copy of Ashton-Tate's dBASE III. I haven't had a chance to do more than put it into Lucy Van Pelt and determine that it does come up, and it does seem to work with PCturbo 186.

The manuals look much improved over the old dBASE II (Vulcan) manuals, and there seem to be a lot of nice features. I don't know how many of those I'll learn, because, alas, dBASE III is copy-protected. I used dBASE II for years; it wasn't copy-protected and indeed urged you to make backup copies.

The scheme of copy protection (1) puts a number of bad sectors on the disk and (2) won't let you use the program on a hard disk without the original system disk. Moreover, when we were trying to determine whether we could run dBASE III with PCturbo 186, we crashed it; I'm not sure how, but now the dBASE III master locks up the machine when we try to run it. It may be that we had a defective disk to begin with; when you deliberately put bad sectors on a disk, it's pretty hard to devise good quality-assurance procedures.

We have dBASE III running under the backup disk provided, but this is absurd.

The only good news is that dBASE III is copy-protected with one of those "unbreakable" systems, meaning that it took the crackers almost three weeks to break it; I'm reliably informed that a number of dealers will give you a copy of the backup program when you buy your regular copy. There are other ways to defeat the copy protection if you have a hard disk.

However, most business owners will not want to fool with demons and unauthorized copies; it will be interesting to see how many will entrust their business records, including all their inventories and accounts, to the frailties of a floppy disk—and that is precisely what Ashton-Tate is inviting them to do. Just think, you too can be at the mercy of kittens, telephones (one good way to lunch a disk is to put it under the phone and wait for it to ring), coffee, magnetic paper-clip holders, and other such goodies. Me, I think I'll stick to my own accounting system and dBASE II.

One of the Ashton-Tate programmers tells me that dBASE III was developed in C on a VAX, so there is obviously a version that will run on a VAX. Ashton-Tate's people don't know what to do with it. One possibility is to market it, but the problem would be to provide support; they don't have that many VAX wizards. If they go this route, it will be interesting to see what they sell it for: recall the database program that sells for $500 to run under PC-DOS and $98,000 to run on an IBM mainframe.

Another thought they've had is to market the VAX version unsupported for the price of the distribution tape. If they want my opinion, that's the route they ought to go. They'll get an awful lot of students, hackers, wizards, and general VAX users accustomed to dBASE III; it won't be hard to guess what program they'll get for their own computers and recommend to their friends.

Of course, if they want my advice they'll get rid of the stupid copy protection, too. Ashton-Tate made a lot of money with dBASE II while remaining good guys; why do they want to go spoil it now?

Winding Down

There are several recommended books this month. First, *The Odyssey File* by Arthur C. Clarke (Ballantine Books, 1984, $3.95) details his conversations, by modem, from Sri Lanka as he was setting up his system, writing books, and working with the director of *2010*. Amusing, instructive, and fun.

(continued)

Lyco Computer Marketing & Consultants

"PEOPLE WHO KNOW WHAT THEY WANT AND KNOW HOW TO USE IT RECEIVE THE LOWEST PRICES FROM US"

MONITORS

TAXAN

210 Color RGB	$259.00
100 Green	$115.00
105 Amber	$125.00
400 Color RGB	$295.00
410 Color RGB	$349.00
420 Color RGB-IBM	$459.00
121 Green-IBM	$145.00
122 Amber-IBM	$149.00

ZENITH

ZVM122A Amber	$ 95.00
ZVM123G Green	$ 85.00
ZVM124 Amber-IBM	$129.00
ZVM131 Color	$275.00
ZVM133 RGB	$389.00
ZVM135 Composite	$449.00
ZVM136 HI RES Color	$589.00

GORILLA

12" Green	$ 82.00
12" Amber	$ 89.00

AMDEK

300 Green	$139.00
300 Amber	$149.00
310 Amber-IBM	$159.00
Color I Plus	$259.00
Color 4T-IBM	$589.00

NEC

JB 1260 Green	$ 99.00
JB 1201 Green	$145.00
JB 1205 Amber	$145.00
JC 1215 Color	$255.00
JC 1216 RGB	$399.00
JC 460 Color	$349.00

SAKATA

SC-100 Color	$229.00
STSI Tilt Stand	$ 35.00
SG 1000 Green	$ 99.00
SA 1000 Amber	$109.00

★ DISK DRIVES ★

INDUS

Atari	$259.00
Commodore	CALL

MSD

SD1 DRIVE	$309.00
SD2 DRIVE	$499.00

MODEMS

MIGHTY MO $79.95 — **Westridge $79.95**

MICROBITS

MPP1000C $109.00

NOVATION

J-Cat	$89.00
Cat	$129.00
Smart Cat 103/	$169.00
Smart Cat 103/212	$389.00
AutoCat	$209.00
212 Auto Cat	$539.00
Apple Cat II	$239.00
212 Apple Cat	$439.00
Apple Cat 212 (Upgrade)	$249.00
Smart Cat Plus	$359.00

Hayes

Smartmodem 300	$199.00
Smartmodem 1200	$469.00
Smartmodem 1200b	$399.00
Micromodem IIe	$249.00
Micromodem 100	$289.00
Chronograph	$179.00

ANCHOR

Volksmodem	$55.99
Mark VII (auto ans/dial)	$95.99
Mark VII	$259.00

★ SAVE ON THESE IN-STOCK PRINTERS

MANNESMANN TALLY

SPIRIT 80	$269.00
MTL-160L	$549.00
MTL-180L	$749.00

JUKI

Juki 6100	$389
Tractor kit	$119

Epson

RX80	$239
RX80FT	$279
RX100	$379
FX80	$389
FX100	$559
JX80	$529
LQ1500P includes Kit	$1089
LQ1500S	$1149

Citoh

Prowiter 8510A	$309
8510BC2	$429
8510BP1	$349
8510SP	$449
8510SR	$499
8510SCP	$519
8510SCR	$569
1550P	$499
1550BCD	$589
A10-20P	$469
F1040PU or RDU	$899
F1055PU or RDU	$1199

PANASONIC

1090	$229
1091	$289
1092	$439
1093	$CALL

BLUE CHIPS

M12010	$279.00
M12010 C-64	$279.00
D4015	$1399.00

OKIDATA

80	$159
82A	$299
83A	$549
84	$669
92	$369
93	$579

LEGEND

880	$259.00
1000	$279.00
1200	CALL
1500	CALL
1081	CALL

PRINTER INTERFACING Available

NEC

NEC 8025	$699.00
NEC 8027	$359.00

STAR MICRONICS

Gemini 10x	$239
Gemini 15x	$355
Delta 10	$339
Delta 15	$449
Radix 10	$499
Radix 15	$589
Powertype	$319
Sweet p 100	$CALL
STX 80	$CALL

GEMINI 10X

$239



CARDCO

LQ1	$449.00
LQ3	$339.00
PRINTER INTERFACE	$39.75
PRINTER INTERFACE W/ FULL GRAPHICS	$65.75

DISKETTES





SKC

SKC-SSSD	$14.75
SKC-SSDD	$17.75
SKC-DSDD	$21.75

ELEPHANT

5¼" SSSD	$15.99
5¼" SSDD	$17.99
5¼" DSDD	$22.99

MAXELL

5¼" MD-1	$19.95
5¼" MD-2	$24.99

IBM-PC COMPATIBLE

CORONA

PPC22A Portable 256K-Amber	$1995
PPC22G Portable 256K-Green	$1995
PPCXTA Portable 256K-10Meg	$3295
COR128K 128K RAM	$ 159

Zenith

Z-150 ..... Call

Columbia Data

1600 ..... Call

Televideo

TS1605 ..... Call

Leading Edge

PC Compatable ..... Call

TOLL FREE 1-800-233-8760

Inquiry 211

MasterCard TO ORDER VISA

CALL TOLL FREE

800-233-8760

Customer Service 1-717-327-1825 Jersey Shore PA 17740

or send order to

Lyco Computer

P O Box 5088

RISK FREE POLICY

In-stock item shipped within 24 hours of order. No deposit on C.O.D. orders. Free shipping on prepaid cash orders within the Continental U.S. PA residents add sales tax. APO, FPO, and International orders add $5.00 plus 3% for priority mail service. Advertised prices show 4% discount for cash, add 4% for Master Card or Visa. Personal checks require 4 weeks clearance before shipping. All items subject to change without notice.

NEW!
RS-232 LINE BOOSTER
Extends RS-232 past the 50 ft. limit



- Handles 7 standard lines plus one spare
- Amplifies, filters lines
- Low power consumption

Order Direct! Only $84.95. All cash orders postpaid. IL res. add 6% sales tax. MC, Visa accepted. Free: New illustrated catalog of RS-232 interface and testing equipment.

Phone:
(815)-434-0846

Model 232LB

B&B electronics
MANUFACTURING COMPANY
P.O. Box 1008B, OTTAWA, IL 61350

Inquiry 38

DISKETTES!...
QUIT HORSIN' AROUND! Order
Datalife BY Verbatim



SS/DD 17.80 ◆ BOX
DS/DD 23.90 ◆ BOX
Don't get Lost in the Shuffle- Call D.J. TODAY!
TWO BOX MINIMUM • MASTERCARD VISA C.O.D.

dj Disk Jockey
P.O. BOX 31126
CHICAGO IL · 60631-1126
CALL TOLL FREE 1-800-524-8130
IL. CALL COLLECT 312-524-8160

Inquiry 87

For S-100 Bus
Two great 256k/1m Dynamic Rams

Model-256KM 256kb $659, 1mb $1895 *8/16bit Data *24b address *Parity *175ns Access time *8086,68000 to 8mhz, Z80/Z8000 to 6mhz without wait states *Unlimited DMA.

Model-256KB Price starts from $425 *8bit data *16/24b address *Parity *Memory Mapping for Ram disk, CP/M 3, MP/M Applications *128k, 192k, 256k boundaries for Zenith Z-100 applications *180ns Access time *8080,8085,8088 to 8mhz, Z80 to 6mhz without wait states *Unlimited DMA.

80286 CPU Price starts from $350 *with math coprocessor interface *Optimized for DRAMs such as our Model-256KM.

OEM, Dealer prices available

S. C. Digital, Inc.
1240 N. Highland Ave., Suite 4
Aurora, IL 60506
312-897-7749

Inquiry 306

Software for the Macintosh continues to be more potential than real.

The *Omni Complete Catalog of Computer Software* edited by Owen Davies (Collier Books, 1984, $23.99 hardcover, $13.95 paperback) is well worth your attention. The reviews are a bit uneven. With darned near 1000 programs reviewed, how could it be otherwise? They are, for the most part, very fair, and I found few to disagree with. Coverage is also spotty—it would have to be—but they don't just review the biggies. For example, there is a very fair treatment of WRITE, my favorite (if a bit obscure) text editor, and it includes a number of other smaller programs, including several I never heard of but have decided I want to look at. Recommended.

Structure and Interpretation of Computer Programs by Harold Abelson, Gerald Sussman, and Julie Sussman (McGraw-Hill, $32.50) is written by the people who teach the MIT course of the same name; this is traditionally the first computer course at MIT for computer-science and electronics-engineering majors.

If you hate Pascal and love LISP, you'll like this book. If you don't know much about either Pascal or LISP, you will not get an objective treatment. The authors say: "In teaching our material we use a dialect of the programming language LISP. We never teach the language, because we don't have to. We just use it, and students pick it up in a few days."

That may happen at MIT. It hasn't happened yet for me.

The preface of the book is by Alan Perlis and contains this sentence: "The discretionary exportable functionality entrusted to the individual Lisp programmer is more than an order of magnitude greater than that to be found within Pascal enterprises."

Fortunately, the rest of the book is somewhat clearer. *Structure and Interpretation* is a frustrating book; I get the distinct impression that if I could just go through it (possibly by taking a month off to plow through without interruptions) I'd learn a lot; but so far enlightenment has eluded me.

Two games of the month are Safari and Elsinore, both for the IBM PC and sold by Workman. They're Adventure-type games (no graphics, just script) written by Dian Girard. My personal game of the month was Millionaire on the Macintosh; the Mac is very well suited to that kind of game. Incidentally, Workman reports that replacement door latches for the Tandon disk drives on the IBM PC are one of his hottest selling items.

Macintosh software continues to be more potential than real. I've even signed a bunch of papers, although I've yet to get much actual software. The 512K-byte memory expansion is now available and we've ordered ours; I suspect that when Fat Mac becomes widely available we'll finally see some of that promised flood of programs.

As usual, I'm out of time and space, but there's much to cover. Next time I'll try to get to the new Sage VI, which is now officially known as the Stride 460; Sage Computer has now become Stride Micro. Alex says the name reminds him of "the really great coffee with the really ugly label." I can't say the new name instantly appealed to me, either. I do like the new line of computers, which run at 10 MHz and sell for prices ranging from $2900 to nearly $60,000 for an all-up 448-megabyte system.

David Gerrold says the micro revolution "shambles" onward. Maybe for him. Me, I feel like I've been run over by the Bullet Train . . . ■

Jerry Pournelle welcomes readers' comments and opinions. Send a self-addressed, stamped envelope to Jerry Pournelle, c/o BYTE *Publications, POB 372, Hancock, NH 03449. Please put your address on the letter as well as on the envelope. Due to the high volume of letters, Jerry cannot guarantee a personal reply.*



Photographed at Gulfstream Aerospace, Savannah, GA.

Is your calculator programmed for success?

Move up to the TI-66. The easy 512 step programmable.

You're in the fast lane now, and the last thing you need is a calculator that slows you down. That's why you need the TI-66 programmable calculator from Texas Instruments. The TI-66 offers full programming power and flexibility so you can handle complex and repetitive math problems quickly, easily, and with fewer keystrokes.

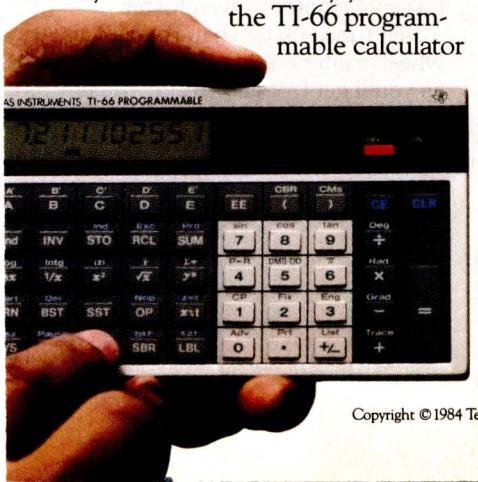

Its 512 merged program steps and over 170 built-in scientific, engineering, and statistical functions make for powerful programming. And its sleek, streamlined design makes for easy use.

Its Algebraic Operating System lets you key in problems as they are written, left to right. And its 10-digit angled Liquid Crystal Display not only makes it easy on your eyes, but provides alphanumeric notation of your program steps so you can make easy modifications as you go along.

The keys are readable and large enough for your fingers. The guide book is a quick study. And at $69.95 suggested retail, the price is easy. So instead of spending extra time on routine calculations that won't get you noticed, promote yourself with the TI-66 programmable calculator.

TEXAS INSTRUMENTS

Creating useful products and services for you.

Copyright © 1984 Texas Instruments Incorporated.

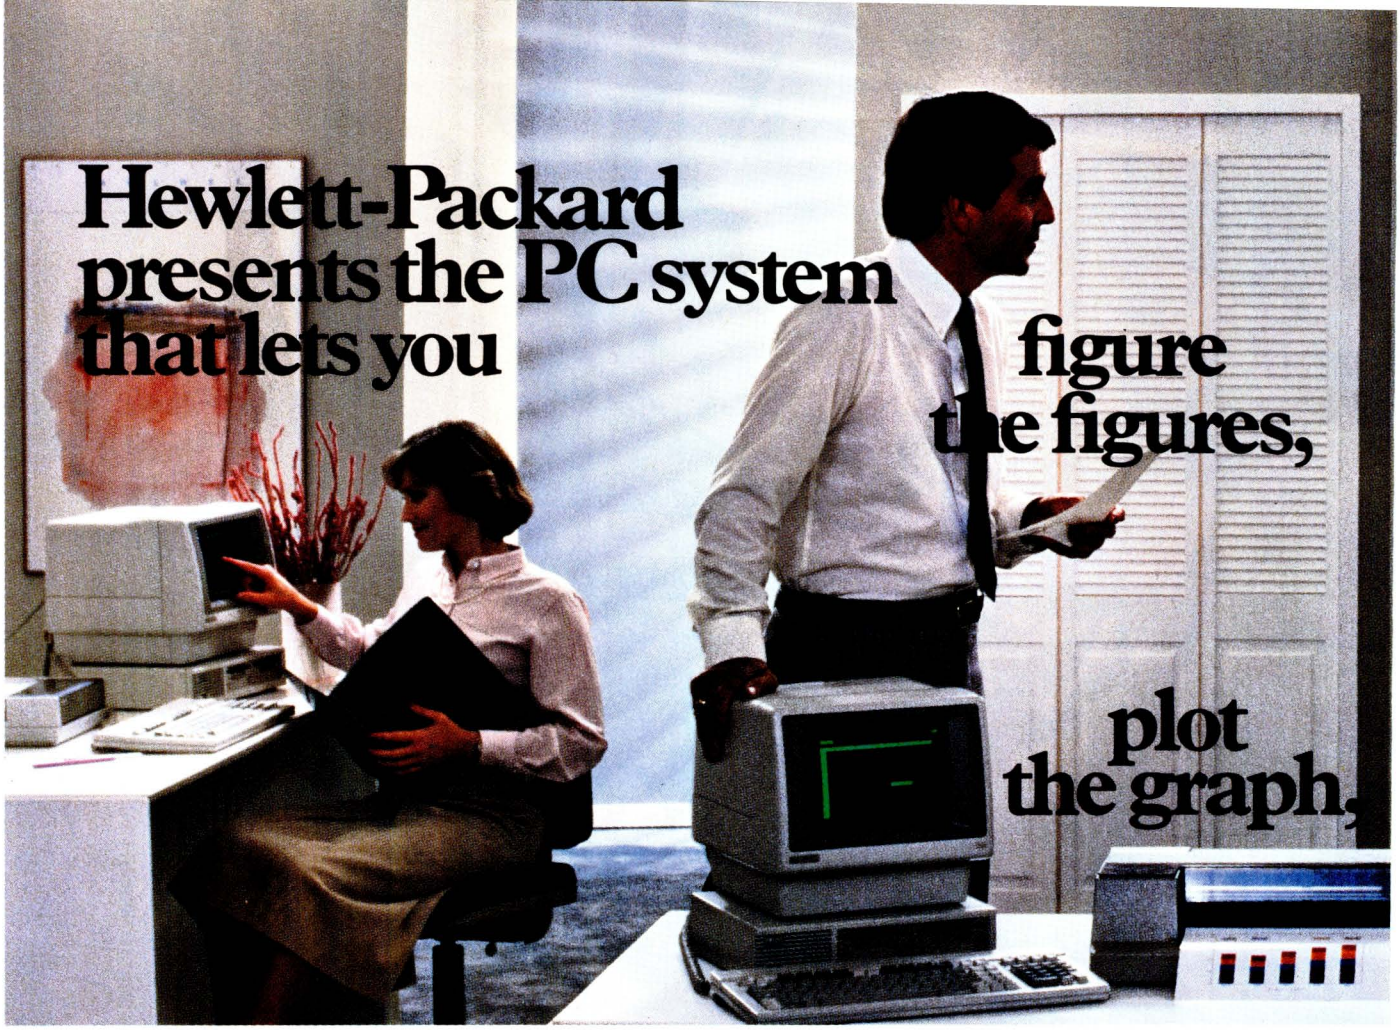

The key word in that long, drawn-out headline is system.

A system built for PCs.

At Hewlett-Packard, it's a quality system of personal computers, plotters, a truckload of software, and Local Area Network (LAN) capability.

It's all matched and designed to work brilliantly together.

Yet the system is so flexible each part can stand alone. Or even team with an IBM PC.

So you can build just the system your staff needs.

It all starts with two of our Hewlett-Packard personal computers.

We call one the HP Touchscreen and the other (because it can do even more) the HP Touchscreen MAX.

The first comes with two double-sided disc drives that give you 256K bytes of main memory, expandable to 640K bytes.

The HP Touchscreen MAX has even more capacity, with the added power of a 14.8-M byte Winchester disc drive.

And both have DSN/Link, to let you set up a direct line of communication between them and your HP 3000 Department Computer.

As the names imply, you can actually change things on either screen just by touching the screen.

That makes the Touchscreen PCs easier to use. And a lot easier to learn.

The system also includes two printers many people think are simply the best around.

Our Hewlett-Packard LaserJet and ThinkJet printers are both breath-takingly fast and refreshingly quiet.

The ThinkJet printer runs at a rapid 150 characters per second.

Yet because the ThinkJet paints each character with a small jet of ink (instead of smashing the paper with keys), it's as quiet as a sigh.

At 300 characters per second, our LaserJet printer is even faster.

Ten times faster than the best daisy-wheel printers. Yet the image is as sharp as you'll get from a printing press. Amazing.

PG02502



and when you get to your hotel, change everything.

Two different plotters are also part of the HP personal computer system.

Both create full-color graphics. One with two pens, the other with six for even more detail.

If you like, the system can be knitted together through a LAN.

It lets a number of HP personal computers link up, talk to each other, share printers, and exchange information.

By the way, there can be a lot of information to exchange. That's because there are more than 500 business software titles available. For word processing, accounting, spread sheets and graphics. You'll find the big names there, too.

1-2-3™ from Lotus.™* WordStar.®** MicroPlan.™*** And the whole catalogue of software from HP.

Finally, when you travel, you can take the system with you.

Hewlett-Packard's portable personal computer turns your hotel room (or your den at home, or your customer's desk) into another part of your personal computer system.

The Portable has plenty of capacity; 272K bytes of RAM and 384K bytes of ROM. And with its built-in modem, it can link you with your office printers and plotters. Not bad for a computer that weighs just nine pounds and can fit into a briefcase.

The system is all linked up, all on the same programs, all designed to work together, and all ready to go.

And all, from Hewlett-Packard.

Just dial 800-FOR-HPPC, toll free, to find the name of a Hewlett-Packard dealer or sales representative near you.

HEWLETT PACKARD

*1-2-3™ and Lotus™ are U.S. Trademarks of Lotus Development Corporation. **Available for the HP Portable beginning January, 1985. WordStar® is a U.S. Registered Trademark of MicroPro International Corporation. ***MicroPlan™ is a U.S. Trademark of Chang Laboratories, Inc.

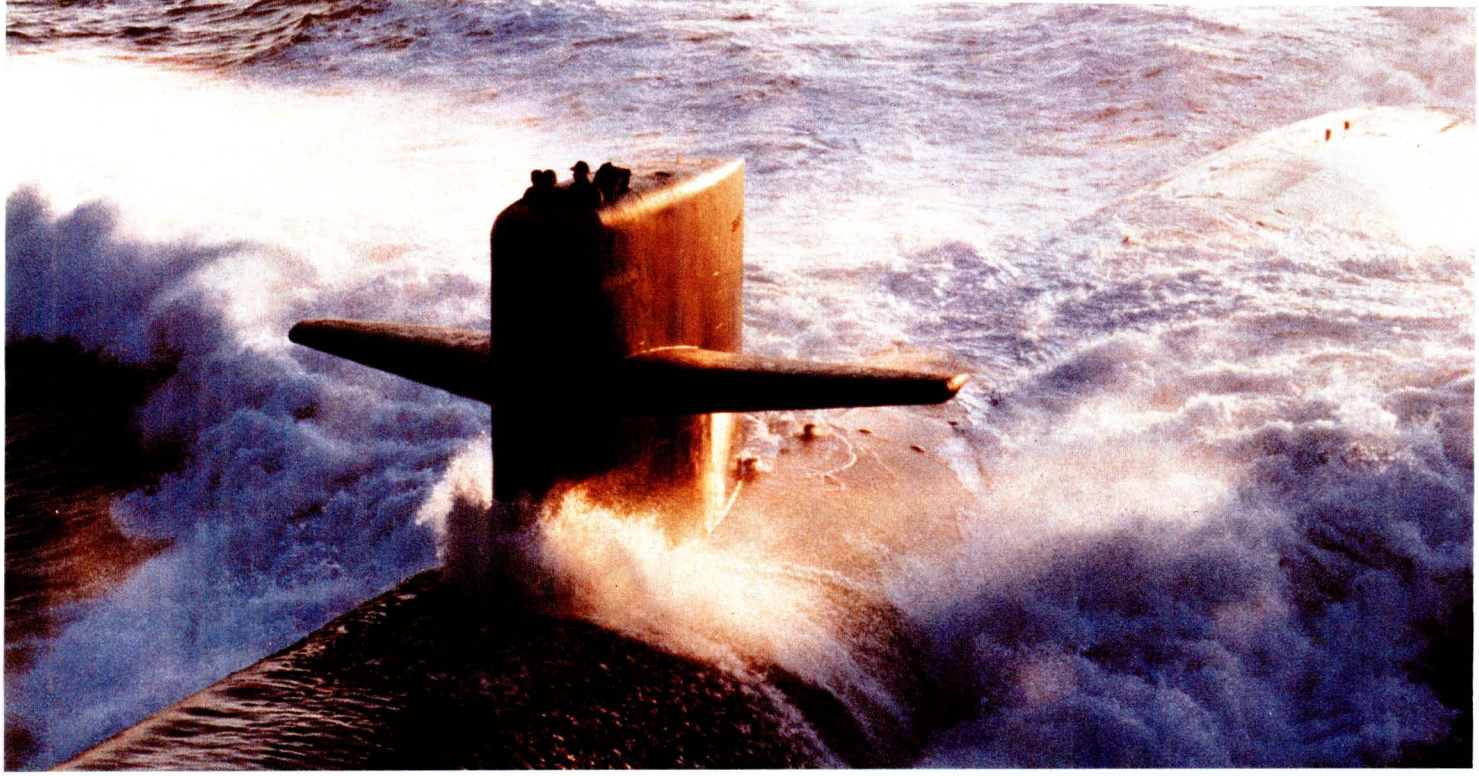

Submarine Engineering. Tomorrow is today at NUSC

The Naval Underwater Systems Center is the Navy's principal research, development, test and evaluation center for submarine warfare and submarine weapon systems. We provide high technology vital to the Navy's tactical and strategic edge in combat systems (sonar, combat control, electromagnetics, underwater weapons and targets, weapon launch and handling), surface ship sonar and undersea ranges.



Engineers and scientists who join the Center's laboratories at Newport, Rhode Island and New London, Connecticut, are encouraged to take responsibility almost immediately. They design, develop and test prototypes of these systems and work with private industry on production of the final product.

"I got responsibility right away," says Ronald Jackson, an electronic engineer. "As I showed ability, my responsibility grew. Today, I'm a project engineer." Through NUSC's liberal education policy, Ron has earned a master's since he joined Newport and is working toward a Ph.D.

Because the Center helps its scientists become expert in other fields, electronic engineer Donna Doane is concentrating on computer software. "I'm doing things people never have done before," Donna says. "I design the project, and I see it to the end—to the final product." Monica Sachs is learning something new each day. "I'm working on weapons systems engineering, a broad subject that allows you to get into several different kinds of engineering. I use my electronic engineering background to understand the other disciplines." And Peter Santiago applies his computer background to quality assurance. "I look for self-gratification in the job, and I get that at NUSC."

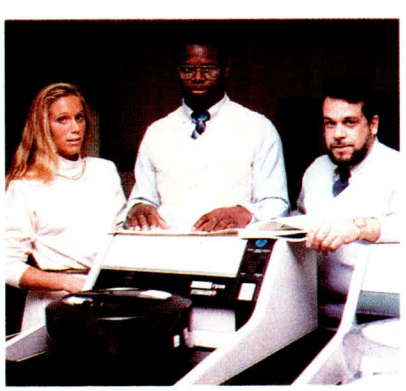

We seek graduating and experienced electronic and computer engineers with degrees from accredited colleges and universities. We also need computer scientists with degrees from colleges and universities affiliated with a school of engineering and specializing in scientific and technical applications.

We offer you challenge, freedom to be innovative and creative, and the opportunity to contribute your skills to our national defense.

And the living is good, too! Newport and New London areas are popular for their excellent beaches, fishing and sailing.

We believe we have both the challenge and the opportunity for you. For further information, contact Naval Underwater Systems Center, Personnel Staffing Division, B Newport, Rhode Island 02841 or call (401) 841-3585.

An Equal Opportunity Employer
U.S. Citizenship Required

C·H·A·O·S M·A·N·O·R M·A·I·L

More MacLetters

Dear Jerry,

As an avid BYTE reader, I generally find the shoot-from-the-hip style of your column both informative and entertaining. Alas, your stabs at the Macintosh in the July 1984 BYTE ("Big Mac," page 312) had neither characteristic for anyone who knows that excellent machine. Your comments on the lack of Macintosh applications at the West Coast Computer Faire (July, "The Big Mac," page 376) completely miss the point. It is of course true that just two months after its introduction a machine that attempts something really new and thereby spurns compatibility with existing systems will have little written for it. But what of the ease of use of the machine, its speed and flexibility, and future software?

In fact, MacWrite is fast, powerful, and easy to learn. As a university professor, I have watched in dismay as secretaries suffered through WordStar on the office IBM PC. It is a real thrill to see how quickly they can pick up MacWrite and how they enjoy the restful screen, the easy formatting, and the magnificent flexibility of the Mac (try doing French in WordStar, Jerry!); the high-quality mode on the printer produces a very pleasing typescript. By July we had Multiplan up and running beautifully (the bug in the first release having long since been corrected) and were eagerly awaiting Microsoft Chart, which will combine with the Imagewriter printer to produce knockout graphics already evident in MacPaint. And all this without the expense and bother of running separate monitors and/or adapter cards for graphics, as one must for the IBM PC.

And what does BYTE have to say about all this, apart from the superb and balanced preview by Gregg Williams in the February 1984 issue? Not much. You say it takes two minutes to call MacWrite, and the July editorial by Phil Lemmons complains that it takes three selections to eject a disk. I timed my 11-year-old son, who is an eager Mac user, on these operations: 50 seconds to enter a specific MacWrite document from the time the power is first turned on; 12 seconds to eject a disk starting from the desktop. For many operations in word processing and spreadsheets, the mouse is much faster than cursor keys (note the large sums of money people are paying to attach a mouse to existing PCs).

Indeed, to paint the Mac a slow or inflexible machine for the average user is the reverse of the truth. Yet when a Macintosh owner writes to ask you to join him in criticizing Microsoft for its copy-protection format on Mac Multiplan ("maybe Microsoft will listen to you"), you respond by attacking the Mac! Those of us using the superb Mac version of Multiplan in an office setting can only grind our teeth in dismay and amazement when you refer to it as "an expensive toy" that is "Macuseless for business."

The Apple people did make one big mistake, for which you and many other reviewers have rightly chastised them: the original model should have had 256K bytes of RAM. By resisting the IBM-compatibility bandwagon, the Mac owner therefore runs a risk, but I bet it's one that pays off. I wager that soon the Mac with 512K bytes will have a large supply of superb software, while many of the IBM clones and compatibles will face declining sales and/or imminent bankruptcy.

PAUL DAVENPORT
Montreal, Quebec, Canada

Sigh. If Macintoshes were free, we'd have no quarrel. Indeed, I've said before that if you can get one at the heavily discounted university price, you should think about that seriously.

On the other hand, in my judgment you can get more bang for the buck with some other machine. That may not always be true, but I think it's true now.

I don't know what to say about the Microsoft copy protection of Multiplan. I don't like copy protection, and I'd think everyone south of Oshkosh would know that. Alas, I don't think Microsoft is going to change policies because of me. It's just too easy to copy-protect Mac disks.

As to doing French in WordStar, thank you, no; of course, a Mac won't help either, since French is what my parents spoke when they didn't want me to understand.

Stay well.—Jerry

Dear Jerry,

As an owner of a Macintosh, having but recently come to the world of the personal computer, I was interested in your comments in your August 1984 column (page 313).

It is difficult to understand why the Macintosh manual and the books I have read are so poorly written and so lacking in vital information. To make matters worse, the commercials for the Mac that I saw on TV during the Olympics actually dwell upon the fact that the manual is small compared with the competition. To my way of thinking, this is not an advantage to be advertised but a serious disadvantage that needs immediate correction. One would expect that Apple would be making every effort to correct the matter instead of using it as advertising copy.

For example, some of "the rest of us" are interested in how to fix a disk that has "bombed." I experienced two "bombed" disks within the first two weeks of Macintosh ownership and only a chance reading of a magazine article gave me the answer.

While the Macintosh does what I want it to do, I would still like to be provided with a detailed, correct, and thorough manual. It is irritating, when setting up simple programs in BASIC, to have to work through feature after feature by trial and error. This computer has not been well served by its documentation, and I appreciated your comments. Perhaps in the near future, Apple will undertake a serious reexamination of its objectives for the Macintosh and make a new manual one of its high-priority projects.

CHARLES S. ALLYN
Pauma Valley, CA

Agreed. There are a lot of "features" about the Macintosh that seem inspired more by ideology than anything else.
—Jerry

Perfect Writer

Dear Jerry,

I read with interest your problems involving indexing and other jobs using WRITE and WordStar. I think that you

(continued)

might want to look at some of the features of Perfect Writer.

I received Perfect Writer as part of a Kaypro package a year ago and have grown to like it. For example, it has indexing already built into the basic program. As you write, you can include an index command and a reference word(s), and Perfect Writer automatically will make an alphabetized index of subjects and the pages on which they appear. Perfect Writer also will create a table of contents if you desire, with chapters, sections, subsections, and even paragraphs. Perfect Writer also can print automatically numbered footnotes on the bottom of each page or references listed at the end of the document.

Although Perfect Writer is not compatible with WordStar, it can be made compatible by judicious use of the PIP command or probably by a program such as FILTER.COM. (Of course, a program such as Footnote is superfluous to Perfect Writer users.) Perfect Writer is not the "in" program these days it seems, but it does have some interesting features.

ROBERT J. SCHECHTER
Los Angeles, CA

You're hardly the only one who likes Perfect Writer, which does have a number of features. I don't use it myself; and one reason it isn't the "in" program is that you have to know some of its idiosyncrasies before you're totally safe from text-losing blunders.

Thanks.—Jerry

PRINTERS

Dear Jerry,

Concerning your quote ". . .one day we'll be able to replace both the office copier and the printer with one device" ("Electrostatic Printers," July 1984, page 328), IBM has already achieved this goal with its 6670 (Models I and II) laser printers that double as convenience copiers.

TONY PATTI
Arlington, VA

Yeah, IBM sure has, but to buy one you'll need scientific notation to write the price and a government subsidy to pay it.
—Jerry

THE SCIENTISTS STRIKE BACK

Dear Jerry,

Ye gods and little fishes! Talk about turning a nonproblem into pandemia. APL to do complex arithmetic—and data typing yet? What is all this talk? You are (sob!) beginning to sound like one of those (aaargh!) computer high priests. Steve Maas posed a valid point about the widespread use of complex arithmetic in science and engineering ("Scientific Computing," August 1984, page 334). For microcomputer users your suggestions had about as much practicality as proposing to do sums and differences on a slide rule. Who has, and at what price, APL for microcomputers?

If a language can handle trig and log functions, it can be used to do complex arithmetic (provided it can recognize the difference between a character and an integer). Most microcomputer BASICs have these capabilities. What you should have told Mr. Maas is to put together a set of subroutines to perform addition, subtraction, inversion, and square roots of complex numbers in BASIC and deal with his inversion of a matrix of complex numbers.

I do all this and more (e.g., complex hyperbolic functions) on a Sharp PC-1500 hand-held computer. To show the simplicity, here are the BASIC statements for multiplication of complex numbers:

```
REM: (S + j T) * (U + j V)
"MULT": W0 = (S * U) - (T * V) :
        T = (S * V) + (T * U)
        S = W0 : RETURN
```

This subroutine is entered with the variables S and T containing the real and imaginary parts of the first complex number, and U and V, respectively, for the second complex number. The product is returned in S and T. W0 is a temporary variable.

The remaining functions are similarly succinct and not at all difficult. APL indeed!

FORREST GEHRKE
Mountain Lakes, NJ

Ah, well, you see I have this mad desire to play about with APL, and the (theoretical) problem posed to me prompted me to say I'd use APL to work the problem.

Actually, like you, I'd very probably use BASIC, which I understand and have at hand.

Thanks.—Jerry

Dear Jerry,

I have been using Pascal for scientific computing for several years, and I couldn't resist writing. FORTRAN was the first language that I learned (more than 10 years ago), while I have known Pascal for only the past four. My scientific-computing needs include numerical simulation, statistics, and the analysis of experimental data. Yet my preferred language for such work is Pascal, and I will use it when writing a new program unless I have an explicit reason not to. (One such reason is when the program must be used on several mainframes. Alas, not many mainframes have a very good implementation of Pascal; no one thinks it's suitable for scientific computing.)

I did a survey of my disk directories and found that of 420 programs, packages, and library routines, literally half of them were written in Pascal and the other half in FORTRAN. I now use FORTRAN for scientific computing like I use BASIC—only when I have no other choice.

On another note, I'd like to let you know of a rather horrifying experience that I recently had at several computer stores. First, I should let you know that my personal computing experience is with homebrew hardware and software (including operating-system and language implementations), and I understand the point of view of a friend of mine who once said that it was all over when they started carpeting the floors of computer shops. After all, who would ever walk around such a place with bare chips in their hands! Anyway, I wasn't looking for anything too exotic—just an ordinary RS-232C cable with a 25-pin subminiature D connector that was male on both ends. Because I needed the cable in order to connect a terminal to a modem, the cable didn't even need all 25 pins wired (just 1 through 8 and pin 20 would do). Sound simple? I usually get such things from one of several mail-order sources, but I was in a hurry.

The first three places I went to asked what kind of computer I wanted to connect to. When I told them just an ordinary terminal, they looked at me like I was from Mars. A fourth place said that they had heard of such cables, but the store manager told me—with a straight face—that it was not a standard cable and the industry was phasing it out! Start hoarding those cables now! Anyway, in a panic I found another shop. They said that they thought that they could help. The salesman looked around for the one guy in the shop that knows what's in the back room, and *he* found them in the basement. They even had two cables, which I wanted. The only catch was that they wanted $55 apiece for them. This was turning into a nightmare. I eventually gave up and went

(continued)



Avis Knows Even The Nicest Guys Can Get Ugly Waiting For A Rent A Car.



That's why we invented the Avis Wizard Number. It puts all your renting information right at our fingertips so we can reserve a car for you in just over a minute.

The Avis Wizard System. A faster way to rent a car.

When you make a reservation with a Wizard Number, you can bypass car rental counters at major U.S. airports. Just go straight from your plane to an Avis Express bus that delivers you directly to our lot, where your car and contract are waiting.

We're trying harder than ever to save you time, from reservation to return. So call Avis at **1-800-331-1212** to apply for an Avis Wizard Number. And see how much faster it makes renting a car.

We try harder. Faster.

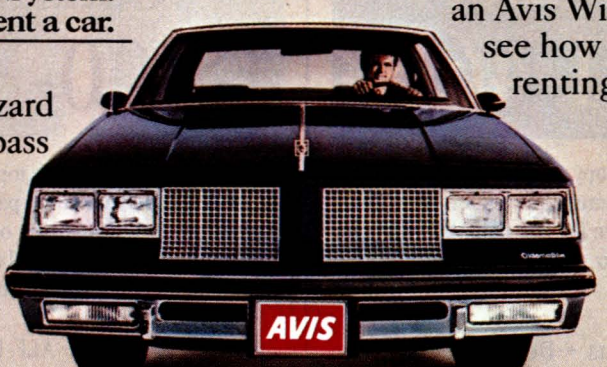

AVIS

Avis features GM cars. Oldsmobile Cutlass Supreme.

© 1984 Avis Rent A Car System, Inc. Avis®

back to my mail-order sources. One of them, Inmac, which is a premium-price, premium-quality place with a superfast delivery time (about 18 hours for me), had the identical cable for about $35. And I found ribbon-cable versions for less than $25 from several sources.

I'm not sure what circumstances could now drag me into a typical computer shop. Those people remind me of a used-car salesman I once knew.

EVERETT CARTER

Your letter is typical: lots of people familiar with both FORTRAN and Pascal (or Modula-2) prefer the highly structured languages for number crunching.

I've had good experiences with Inmac. You can find stuff at lower prices, but I've had fast and reliable service.—Jerry

LOOKING FOR A PASCAL

Dear Jerry,

I am interested in buying a Pascal for my Morrow MD2, but I don't think JRT is good enough, and Borland's Turbo doesn't come in the right DOS. A recent Ellis Computing ad in BYTE included the addition of Nevada Pascal to its line of products.

I sent for a catalog hoping to learn more about it, but I received the same catalog that I had before, without the Pascal. I am left almost totally ignorant as to what Nevada Pascal is like. Since you seem to be an expert on Pascal, why don't you do a review of Nevada Pascal?

ANDY MARKEN
Columbia City, IN

Alas, the Ellis Nevada Pascal is JRT Pascal (version 3.0), or so I've been told.
—Jerry

TK!SOLVER

Dear Jerry,

I have been reading for some time of the Japanese fifth-generation computer and of nonalgorithmic languages. I thought I would let you know that I have been using such a language for a couple of months. It is called TK!Solver, and it's wonderful. It solves problems that can be modeled as algebraic equations.

About six months ago I had to design a three-port network with five unknown resistors, subject to five constraints. The equations were nonlinear, involving sums of reciprocals of the resistors. Using various mathematical tricks, I reduced the problem to three equations in three unknowns and then wrote a FORTRAN program to help evaluate the equations as I searched a three-dimensional space for an answer. I am a computer user, not a computer programmer, and the inevitable bugs took their toll. I finally got my answer after 40 man-hours. Was it worth it? Yes, the payback over the life of the product will cover the cost. Would I have spent the 40 hours if I had known it would take that long? No, a more expensive solution was available, and there were more important problems to solve.

Well, about two months ago, some fellows down the hall bought TK!Solver and put it to work evaluating some straightforward equations and making

IBM COPY PROTECTION

A versatile system that works.

Call ALF first
1-800-321-4668

MultiGuard is ALF's new IBM copy protection system. It's reasonably priced, yet offers maximum protection and flexibility. Call the toll-free number above for our pamphlet on copy protection systems. Inside Colorado, call 234-0871.

ALF ALF Products • Denver, CO

BLANK DISKS

Major Brands • Low Prices

Call ALF first
1-800-321-4668

If you need 50 or more top quality disks, bulk-packed (without expensive labels or fancy packaging), call the toll-free number above for the latest price on your favorite brand. ALF copies thousands of disks each day—so we know which disks will perform best with your system! Inside Colorado call 234-0871.

ALF ALF Products • Denver, CO

Inquiry 13

some plots. It looked interesting, and I looked through the manual. After two hours, I decided to try the three-port problem on it as a test. Four hours after I picked up the manual, I had a solution. A 10:1 improvement. Actually, more than 10:1 when you consider my years of FORTRAN experience and no experience with TK!Solver.

Now I use the TK!Solver program frequently. I have several of my favorite active filters programmed into it. I just enter the desired center frequency, Q, gain, and capacitor values, and TK!Solver calculates the required resistors.

This program is going to do to algebra what calculators have done to arithmetic. You ought to try it.

Any complaints? A few. It does not handle complex numbers. (Laplace transforms have to wait.) The control structure lacks orthogonality. Some commands are invoked by special characters, some from a menu, and some by typing things in special fields.

I really enjoy your column.

ROY MCCAMMON
Austin, TX

I've previously reviewed TK!Solver, and I agree: it can do wonders for my ability to work algebra problems. The manuals leave a bit to be desired, but if you study them hard you'll figure out how to use the program—and it certainly works.
—Jerry

TOM TCIMPIDIS

Dear Jerry,

As a follow-up on your comments in September 1984 ("The RCBS Blues," page 368), you may be interested in this message from Tom Tcimpidis's bulletin board (see figure 1).

MERVIN E. FRANK
Santa Ana, CA

I understand that Pacific Telephone and the Los Angeles City Attorney held a meeting to which neither Tom Tcimpidis nor his attorney were invited; and after that meeting, the City Attorney changed his mind and decided to prosecute Tom because some wag had put telephone access codes on Tom's public bulletin board. Tom's bulletin board can be reached at (818) 366-1238.

Those interested can send funds for Tom's defense to Lynzie's Motherboard, POB 284, North Hollywood, CA 91603. The address of the Los Angeles City Attorney is Ira Reiner, Los Angeles City Attorney, Suite 2000, 200 North Main St., Los Angeles, CA 90012.

When I talked to Pacific Telephone officials, they swore they wanted to find a reasonable settlement to the conflict of interest between the free flow of information and protecting their property rights; this seems an odd way to go about it.—Jerry

```
FROM MOG-URS BULLETIN BOARD
  (818) 366-1238

MSG #10705 ON 08/29/84 AT 00:49:04
FROM: SYSOP    (1)
TO: ALL
SUBJECT: THE MOG-UR BATTLE WITH PACTEL/POLICE MAY NOT BE OVER
YET!    8

     I HAVE RECEIVED WORD THAT THE L.A. CITY ATTORNEY HAS, WITHOUT
ANY ADVANCE WORD NOR ANY INDICATION OF REASON, INDICATED THAT HE
INTENDS TO FILE CHARGES UNDER SECTION 502 (?). CHARLES LINDNER, MY AT-
TORNEY, WAS NOTIFIED OF THIS TODAY AND WILL ATTEMPT TO FIND OUT
WHAT IS TRANSPIRING.
     I WILL KEEP EVERYONE INFORMED AS INFORMATION BECOMES
AVAILABLE. THE FIGHT MAY NOT BE OVER YET (UNFORTUNATELY)!
                                        -TOM

  END OF MSG # 10705 FROM SYSOP    (1)
```

Figure 1: *Message from Tom Tcimpidis's bulletin board.*

ENCRYPTED SOFTWARE

Dear Jerry,

Be patient. Only a few more years of copy protection and software piracy remain. Soon, microprocessors will be able to run encrypted software. Each processor will come with its own encryption key. When ordering software, you give the key over the phone to the manufacturer who will send you your own special version of the program. You can make as many copies as you want or copy it to a hard disk; it doesn't matter since you can run the program on only that particular processor. Of course, if you use more than one computer (one at home, one at the office) or if several computers share a single disk, there is still a problem, but software vendors will probably have a more liberal policy for multiple copies.

While each processor will probably cost a little more, the decline in software prices should easily make up for that. Nor should the encryption affect the speed, since the decryption can be done in parallel with the execution of previous instructions. Since the decryption key is locked inside the processor, it would be almost impossible to decrypt the program. As a programmer and a user, I'm looking forward to the day of secure (and affordable) software.

KENNY HIRSCH
Chapel Hill, NC

Over my dead body! Next they'll want us to have our social security number permanently stamped into any copy of a book we buy, and severe penalties for reading someone else's book . . .

The decline in software prices will be enough; we don't need schemes like this!
—Jerry ■

USERS GROUP CORNER

Pittsburgh Area Computer Club
c/o Engineers Society of Western PA
Wm. Penn Hotel
530 West Penn Place
Pittsburgh, PA 15219

Meetings on Apple, Apple CP/M, Lobo Max-80, IBM PC, and other machines. Write for meeting schedules.

dBASE III v

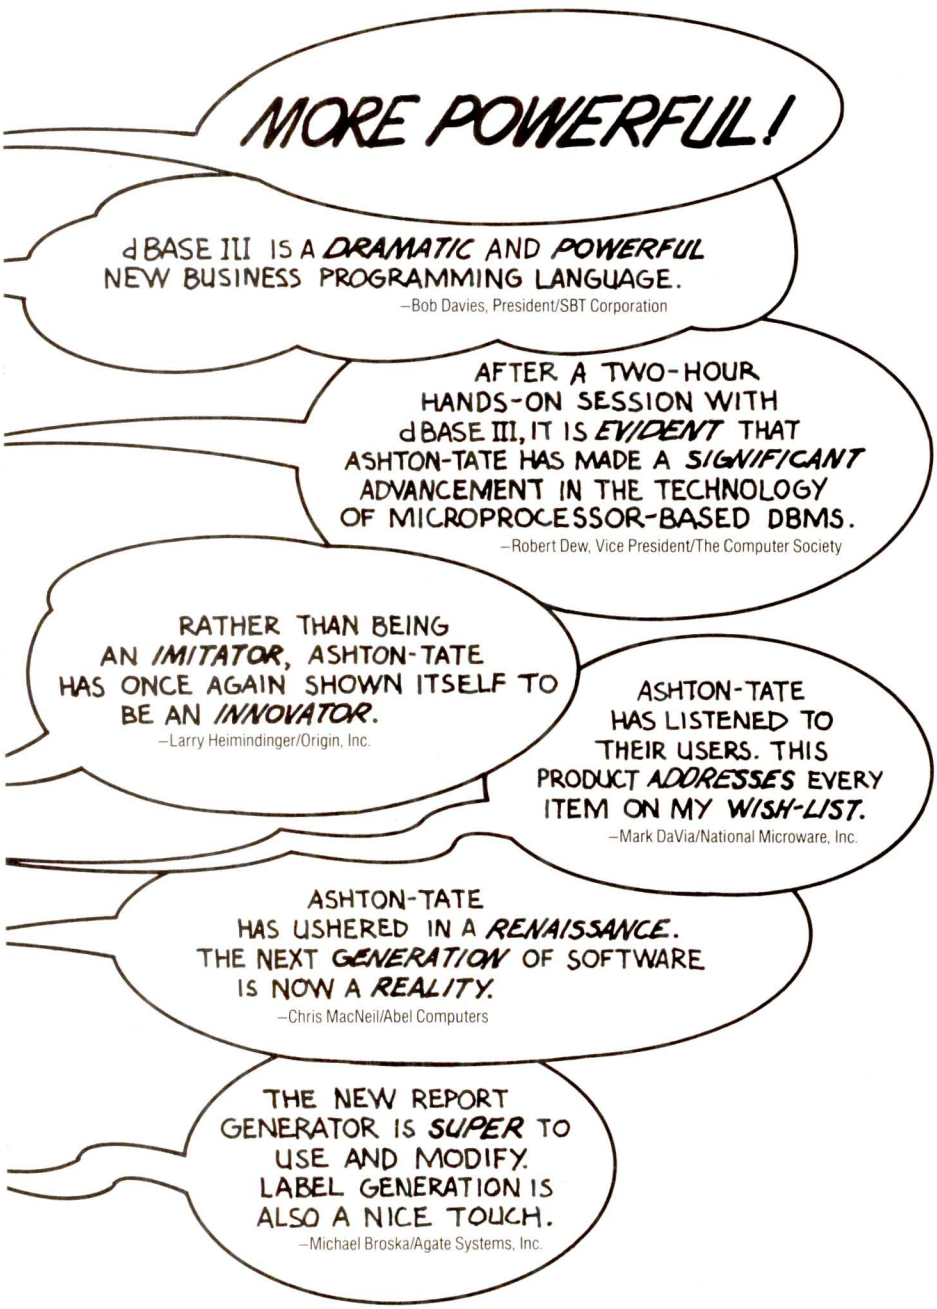

dBASE III™ is the powerful and easy-to-use relational database management system you've been waiting for. You can use it without hesitation whether you're a beginner or an expert.

The big winner in the easy-to-use vs. more powerful controversy is you.

If you want to know all about dBASE III, come to your Ashton-Tate software dealer for a free demonstration. For more information call (800) 437-4329 ext. 232 or in Colorado call (303) 799-4900 ext. 232.

dBASE III and Ashton-Tate are trademarks of Ashton-Tate. © Ashton-Tate 1984. All rights reserved.

s. dBASE III



dBASE III

Software from ASHTON·TATE™

Finally, a New DBMS Technology

INFORMA is what NETWORKING is all about:

INTERACTIVE REAL-TIME DATASHARING

The experts say . . .

Corvus Systems, Inc.
"INFORMA is one of the finest multi-user Database Management Systems available for the OMNINET™ Local Area Network."
Sid Arora, Third Party Marketing Manager

TeleVideo Systems, Inc.
"INFORMA is one of the finest, true multi-user Database Management Systems we have seen run on the TeleVideo Personal Mini.™
Mark Calkins, Product Marketing Manager

Novell
"Many of our Netware end users have found INFORMA to be a very powerful and versatile Database Management System."
Rob Walton, Manager of Independent Software Development

3COM Corporation
"The INFORMA DBMS is one of the best examples of the benefits users achieve with multi-user network software."
Robert Buchanan, Jr., Software Product Manager

•FAST •POWERFUL •EASY TO USE

- 10 Level Security
- 50 Keys (indexes) per record
- 8000 fields per record
- 1 sec. access from 35,000 record file
- 255 screens per record
- Unlimited math and relational operations
- Intuitive "Query by Example"
- Full Formatting Reporter

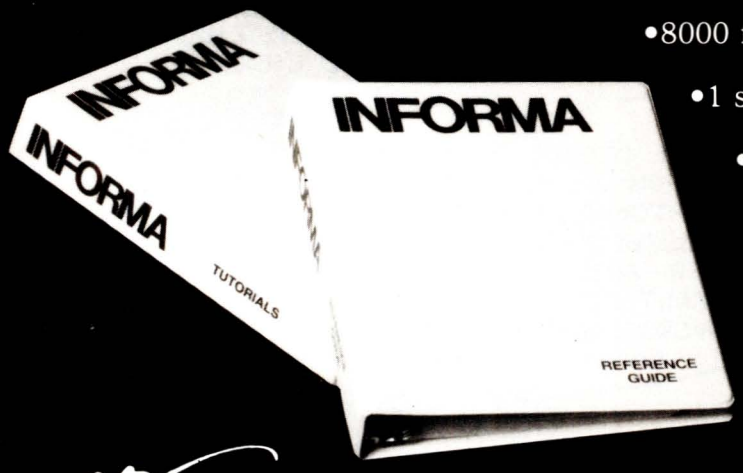

UNLIMITED PROCESSING INCORPORATED

8382 Baymeadows Road, Suite 8
Jacksonville, Florida 32216
(904) 731-8330 (800) 874-8555
Telex 350754 (800) 874-4185

Incredible Introductory Offer

Single-user
$199
regularly $795

LAN/Multi-user
$599
regularly $1495

Available on over 20 operating systems including IBM's new PC NETWORK

Inquiry 359

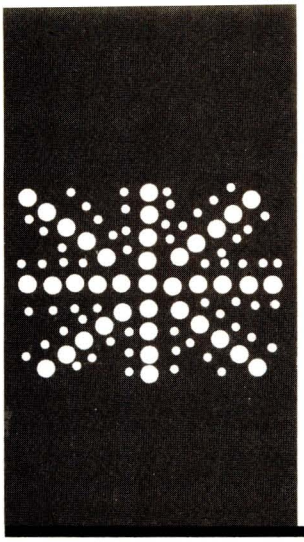

B·Y·T·E U.K.

The Amstrad CPC 464

The home computer in the U.K.

BY DICK POUNTAIN

It's not easy for a U.K. citizen to write about home computers for an American magazine. We use the term to refer to an altogether different object on our side of the Atlantic.

In the U.S.A., an Apple II is a home computer; the IBM PC in its smaller configurations is a home computer; the Macintosh is a home computer. Home computers use floppy disks for mass storage and perform useful functions like word processing and income tax preparation as well as playing games.

In the U.K., those computers would be considered rather expensive as business computers, let alone for home use. Home computers here typically cost less than £200 (about $250) and use cassette tape recorders for mass storage. We have various manufacturers of our own, some unheard of in the U.S.A.—Sinclair Spectrum, Acorn Electron, Oric Atmos, Memotech, Enterprise, and Amstrad. Others, like Newbrain, Jupiter, Lynx, and Dragon, are already defunct. Even when we do have machines in common (the Commodore 64), I suspect that the vast majority of U.S. users buy the disk drive, while the majority of U.K. users have only the cassette deck.

A philosophical question that our Sunday newspapers love to debate (once a month on average) is: what are home computers for? The truthful answer (though seldom the one given) is: to play with. The vast majority of home computers are used solely for playing games or learning programming. Until disk drives become the norm rather than the exception, that will remain the case.

The fact that "home computer" has an essentially different meaning in our respective cultures is clearly demonstrated by the relative lack of success of those British models marketed in the U.S.A. (e.g., the Timex Sinclair 2068). With higher spending power and expectations than their British equivalents, U.S. buyers aren't tempted (and might even be repelled) by ultralow prices.

I'm devoting this month's column to a recent British home computer that promises to be more useful than most. My criteria for usefulness include a robust typewriter keyboard, the ability to display the standard 80-column by 24-character text screen (most go up to only 40 columns), a disk-drive option of reasonable capacity and cost, and support for a mainstream operating system such as CP/M or MS-DOS. Only then could I recommend a home computer as a dual-purpose business and pleasure purchase. The Amstrad computer comes the closest yet to filling this bill.

AMSTRAD CPC 464

The name Amstrad is associated with budget hi-fi in Britain. The firm, part of the giant GEC group, has beaten the Japanese at their own game and captured a lion's share of our home market for low-priced racked systems.

In June 1984, Amstrad entered the home computer market with a machine bearing the unsexy title CPC 464. It was designed wholly in Britain in conjunction with Locomotive Software, a seasoned Z80 systems house. Locomotive produced a neat operating system for the CPC 464; it incorporates so many good ideas that I wish it had emerged four years ago when the Z80 was still hot.

The CPC 464 is based around a 4-MHz Z80A with a full 64K bytes of RAM (random-access read/write memory) and a paged ROM (read-only memory) system of fiendish ingenuity. The computer package is noteworthy for consumer-oriented features that have accrued from Amstrad's hi-fi experience. It's a "ready to go" system, incorporating both a video-display unit (VDU) and a cassette recorder in the basic package. Two models are available, with either a monochrome or RGB (red-green-blue) color monitor, for £200 or £300 (about $250 or $375), respectively. Most color monitors cost £300 here, *without* a computer.

(continued)

Dick Pountain is a technical author and software consultant living in London, England. He can be contacted c/o BYTE, POB 372, Hancock, NH 03449.

The color monitor uses a modified Amstrad television tube and the bandwidth is barely adequate for the computer's 80-column text mode, though it gives good saturated color and a steady display. The green-screen monochrome monitor is fine for 80-column work.

A power supply, which is incorporated into both monitors, drives the computer console, so only a single power cord is necessary for the whole system. The console is the size of an IBM keyboard unit (though deeper) and has a cassette recorder built in at the right end. This unit is not fully software-operated though; like the old PET, you must switch the Play, Record, and Rewind buttons by hand. The keyboard is the best I've found on a home computer and quite adequate for word processing. It has a huge Enter key, a separate numeric pad, and a compass-style cursor group; the keys are brightly color-coded.

Sound and color are strongly featured. The CPC 464 has a total of 27 colors, from which a palette of 16, 4, or 2 must be selected according to screen mode. The GI AY-3-8912 chip provides sound; it supports three voices (in stereo), with both tone and volume envelopes. The operating system allows sophisticated concurrent manipulation of sounds using queues and rendezvous. While this chip lacks the filters and ring modulators of Commodore's sound interface device (SID), you can easily exploit its capabilities through BASIC; I certainly can't say that about the Commodore 64.

As for the CPC 464's other silicon content, a 6845 controls the CRT (cathode-ray tube) display while an 8255 parallel peripheral interface controls the cassette recorder and the built-in Centronics printer port. A single Ferranti custom gate array does everything else. Since the memory is in the form of a mere eight 64K-byte chips, the circuit board resembles an underpopulated suburb rather than the usual city center.

The most obvious hardware omission is a serial port; Amstrad will offer one later but only as an add-on.

BASIC

The most interesting features of the CPC 464 are Locomotive's BASIC and the operating system. The BASIC is largely standard Microsoft version 5.X with extensions for graphics, sound, multitasking, and interrupts, and a clean implementation of streamed I/O (input/output). It ran the Sieve of Eratosthenes in 1324 seconds, faster than a grown-up CP/M machine running MS-BASIC.

A SOUND command that takes seven parameters supports sound. Envelopes are declared like arrays with the ENV (volume) and ENT

(continued)

Change your diskette to fit the IBM PC



THE FILE CONNECTION

8" DISKETTE SYSTEM FOR THE IBM PC

Our "FILE CONNECTION" programs provide 8" diskette file exchange between the IBM PC and most Micro-Mini-Main Frame computer systems.

Our "WORD CONNECTION" programs provide 8" diskette text document exchange between the IBM PC and many word processing systems.

Our "DISPLAYWRITER CONNECTION" programs transform documents from Textpack, Wordstar, Multimate, etc. to the new DisplayWrite 2 format.

In addition to our hardware and program products, we also provide a conversion service for customer supplied diskettes. Please contact us for information about the hundreds of 5¼" and 8" diskette formats and systems which we currently support.

FLAGSTAFF ENGINEERING / P.O. Box 1970 / Flagstaff, AZ 86002
Telephone 602-774-5188 / Telex 705609 FLAG-ENG-UD

Inquiry 133

Inquiry 401

Quickly
CAN YOU FIND ANY FILE IN ANY DIRECTORY ON ANY DRIVE?

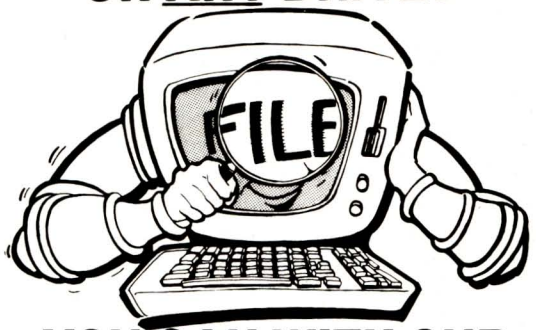

YOU CAN WITH OUR "7 PLUS" UTILITIES!
(that's the least of it!)

Our "7 PLUS" Utilities will: ■ provide graphic hierarchical tree display and ■ disk browser and ■ global directory ■ package multiple batch commands ■ multiply usefulness of standard DOS utilities ■ speed backup/restore of hard disk↔floppy by 30%-100% ■ automatically compress data—up to 600K per diskette ■ quickly move files between hierarchical directories. Users say "No MS-DOS site can afford to be without this excellent set of utilities."

"7 PLUS" Utilities are the heart of our Dump/Restore-XT package. It runs with MS-DOS 2.0 or greater. Costs just $129.95. MasterCard and VISA accepted. Dealer inquiries invited.

COGITATE INC.
A HIGHER FORM OF SOFTWARE
24000 Telegraph Road
SOUTHFIELD, MI 48034
(313) 352-2345 •TELEX 386581

Inquiry 219

YOUR MOTHER'S AT The Byte Shop

Our New On-line Computer Product Center.

- RUN SOFTWARE DEMOS
- SEND ELECTRONIC MAIL
- ACCESS DATA-BASES
- BROWSE OUR PRODUCT CATALOG

for a password and a user name contact:

MASTERBYTE COMPUTERS OF NEW YORK
SUITE 815, 19 WEST 34TH STREET
NEW YORK, NEW YORK 10001
(212) 760-0340

a stride micro dealer

© 1984

BYTE back issues for sale

	1976	1977	1978	1979	1980	1981	1982	1983	1984
Jan.				$2.75	$3.25	$3.25		$3.70	$4.25
Feb.			$2.75	$2.75	$3.25	$3.25	$3.70	$3.70	$4.25
March			$2.75		$3.25		$3.70	$3.70	$4.25
April			$2.75	$2.75	$3.25	$3.25	$3.70	$3.70	$4.25
May		$2.00	$2.75	$2.75	$3.25		$3.70	$3.70	$4.25
June		$2.00	$2.75	$2.75	$3.25		$3.70	$3.70	$4.25
July	$2.00	$2.00	$2.75	$2.75	$3.25		$3.70	$4.25	$4.25
Aug.		$2.00	$2.75	$2.75		$3.25	$3.70	$4.25	$4.25
Sept.		$2.75	$2.75	$2.75	$3.25		$3.70	$4.25	$4.25
Oct.			$2.75	$2.75	$3.25	$3.25	$3.70	$4.25	$4.25
Nov.				$3.25		$3.25	$3.70	$4.25	$4.25
Dec.		$2.75	$2.75	$3.25	$3.25	$3.25	$3.70	$4.25	$4.25

Special BYTE Guide to IBM PC's — $4.75

Circle and send requests with payments to:
BYTE Back Issues
P.O. Box 328
Hancock, NH 03449

Prices include postage in the US. Please add $.50 per copy for Canada and Mexico; and $2.00 per copy to foreign countries (surface delivery).

☐ Check enclosed

Payments from foreign countries must be made in US funds payable at a US bank.

☐ VISA ☐ MasterCard

Card # _____

Exp. _____

Signature _____

Please allow 4 weeks for domestic delivery and 12 weeks for foreign delivery.

NAME _____
ADDRESS _____
CITY _____
STATE _____ **ZIP** _____

Get the Proportional Printing Program which Really Works!

Get type-set quality true proportional spaced printing from unmodified WordStar and NewWord document files. **PropStar** prints on most daisy-wheel printers with ps type-wheels including Diablo, Qume, NEC, Brother, Juki, S-R, C.Itoh and many others.

PropStar is a stand-alone program, not a patch to your w.p. program, it maintains correct letter spacing, never crowds capitals (even on short lines), gives higher quality print than modified WordStar. **PropStar** supports most of the common WordStar and NewWord print enhancements. No installation patching required. For CP/M-80 systems on 8" and 5-1/4" media, also for MS-DOS systems on 5-1/4" PC media. Only $ 49.95, Visa & M/C o.k. Specify computer and printer. Dealers wanted.

CIVIL COMPUTING CORPORATION
2111 Research Drive Suite 1
Livermore, California 94550 (415) 455-8086

Inquiry 56

BIG DISCOUNTS ON LITTLE BOARDS™ & ACCESSORIES



- **AMPRO LITTLE BOARD**™ – 64K, Z80a CPU, CTC, DART, 1 parallel port, 5¼ controller supports four 48tpi and/or 96tpi drives w/ CP/M 2.2 and ZCPR3 (A & T) ..... from **$329**
- **SYSTEM SUPPORT PKG** – Manuals, source code schematics, connectors & cables **$99**
- **SCSI PLUS** – DMA Hard disk interface **$99**
- **TEAC** 55B DSDD 48tpi ½ ht drive **$195**
- **TEAC** 55F DSDD 96tpi ½ ht drive **$239**
- **INTEGRAND** Custom two drive cabinet with 5 amp power supply & power cables **$199**
- **TERM-MATE** – Cabinet for 2½ ht + LITTLE BOARD w/ all cables & supply **$229**
- **AMPRO SERIES 100** complete systems ... **$CALL**

VISA & MASTER CHARGE. Personal Checks.
Please allow 2 weeks. Shipped via UPS.
Prices F.O.B. Prairie View, IL.
For additional information write or call:
DISKS PLUS • 15945 West Pope Blvd. • Prairie View, IL 60069
(312) 537-7888

DISKS PLUS
DIVISION OF SOLARONICS, INC.

Inquiry 112

Turbo + PC Tools = Programs
Tools for Turbo Pascal™ on the IBM PC

Window Management = menus, help files . . .
- Unlimited windows
- Window overlay & recall
- Cursor save & jump
- Access all colors & chars
- Window Compiler/Librarian manages window files

Graphics Drawing = HiRes plotting power!
- Ellipses, polygons & more
- Region fill and clear

String Formula Evaluator = easy calculation
- 22 functions with nesting and implicit multiplication
- Won't bomb on overflow or division by zero

System Check and Control = max flexibility!
- Time & date access
- Get disk types & room
- Get & set default drive
- I/O information

All this for only $39.95* . . . Incredible!
You get 321K of *source* code on a double-sided disk and a 35 page manual. For single-sided drives add $2. Works with DOS 2.0, Turbo 2.0.
*Please include $2 for postage and handling ($4 if outside of USA). Californians add 6%.

Paragon Courseware
4954 Sun Valley Road
Del Mar, CA 92014
(619) 481-1477
Turbo Pascal is a trademark of Borland International

Inquiry 271

(tone) keywords. You can declare any number of envelopes because only the envelope number is passed to SOUND, which means you can swap envelopes easily.

The graphics commands are unsophisticated by today's standards: only point and line drawing, with no fill or circle draw routines. Amstrad will release an extended graphics set as a ROM expansion.

The multitasking and interrupt facilities use a nice natural syntax, similar to the American National Standards Institute (ANSI) BASIC real-time extensions. Four independent interval timers are provided, prioritized in the order 3, 2, 1, 0. A task is set in motion by calling its subroutine with either EVERY (repeat at stated intervals) or AFTER (delay for stated period) and a timer number. Such a subroutine then interrupts the main program at the specified times. The time units for specifying intervals are 1/300th-second timer ticks, which allows some pretty fine-grained interleaving of tasks. I used listing 1 to check this function.

Listing 1 uses interrupting routines on timers 0 and 1 and, at first, prints a string of c characters interspersed with an ab combination. As y increases and the b routine takes longer, the main program gets squeezed out (the c characters gradually disappear). Then the a routine is smothered, leaving only a string of bbbbbbbbbbbb. . . . If I change line 100 to give a the higher priority timer 2, then only aaaaaaaa . . . will survive this Darwinian struggle for processor time. This simple scheme of resource allocation ensures that you can't blow up the system and that something will always run (even if it isn't what you intend), an important feature in a system aimed at beginners.

When it's important that some program be allowed to terminate unmolested, you can disable software interrupts with the DI directive and reenable them later with EI. The operating system maintains a queue for all interrupt routines, although calls that overflow the queue will be lost. The REMAIN keyword returns the current count from any of the timers and resets it to zero.

I/O is handled by streams with an associated windowing capability. There are 10 streams recognized by the system, 0 to 7 for the screen, 8 for the printer, and 9 for the cassette. They don't have to be declared, opened, or closed, and stream 0 to the screen is the default. The WINDOW command links a stream with a screen window whose corner coordinates are optional arguments (whole screen is the default). Then PRINT and INPUT are simply redirected, by specifying the stream number, to the desired window. You can also create a high-resolution graphics window. These ideas aren't new, but the syntax feels cleaner and easier to use than previous attempts I've seen.

In short, the CPC 464's BASIC supports the available hardware to the extent that PEEK and POKE become redundant (though people will use them just the same).

Operating System

The CPC 464's operating system (OS) and architecture are neat. The OS sits in 16K-byte ROM at the bottom of memory while BASIC is in a 16K-byte ROM at the top of memory. Both

Listing 1: *Program to check out interrupt timing on the* CPC 464.

```
100 EVERY 10,0 GOSUB 1000
200 EVERY 10,1 GOSUB 2000
300 PRINT "c";:GOTO 300
1000 FOR x=1 TO 100: NEXT x:PRINT "a";:y=y+1
1100 RETURN
2000 FOR x=1 TO y :NEXT x :PRINT "b";
2100 RETURN
```

ROMs overlap the 64K bytes of RAM, the upper one overlapping screen memory. They are switched in and out in a most ingenious fashion. Locomotive Software uses five of the Z80 RESTART instructions to effectively extend the processor's instruction set, so that programs bring ROMs into the address space in a way that's transparent to the user. In particular the RST pseudo-instructions guarantee that a write operation always accesses RAM regardless of the ROM switch state. If an operating-system routine is called, the lower ROM will be switched in; the operating system switches out the upper ROM if it needs to access the screen. All operating-system routines restore the previous ROM state when they return. This scheme leaves you with a total of 43,533 bytes free for BASIC programs, which is at least 10K bytes more than on comparable machines.

Furthermore, you can place up to 252 extra 16K-byte ROMs into the upper ROM area, bank-switched via an I/O port and a unique ROM address. Expansion ROMs can be one of two types: background or foreground. BASIC is a foreground program that could be replaced by another, such as FORTH or CP/M. Whichever program is installed at ROM address 0 will take over the machine at boot-up—you don't need to physically replace the on-board ROM.

Background ROMs provide services to the current operating system, such as device drivers for new peripherals or extensions to the graphics routines. Only seven background ROMs can be installed. The operating-system kernel supports a kind of far addressing (a branch via I/O mapping to any one of 252 parallel ROMs in the upper ROM area) that lets a program call subroutines in ROM. In addition, ROM routines can call subroutines in other ROMs. Resident system extensions (RSXs) behave like background ROMs but must be loaded into memory—they are similar to MS-DOS version 2 configurable device drivers. For some applications that don't justify the cost of blowing a ROM, an RSX might be more suitable.

The operating-system software is written in a highly modular fashion. Separate units (called packs) deal with the keyboard, text VDU, graphics VDU, cassette, and sound, while a kernel handles interrupts, events, and the ROM selection mechanism. All OS calls are vectored through a RAM-based jump table in proper fashion, so programs can be insulated against future firmware changes.

The Keyboard Manager pack completely defines the interface to the keyboard hardware, so that a program

(continued)

A Classy Instance of Smalltalk

If your object is easy programming, our message is . . .



Methods

A complete object-oriented program development environment with Smalltalk-80™ language compatibility.



It's powerful, fast and fun!

For IBM PCs and compatibles with 512K bytes RAM using PC-DOS or MS-DOS.

DIGITALK, INC.

5200 West Century Boulevard
Los Angeles, California 90045 (213) 645-1082

Smalltalk-80 is a trademark of Xerox Corporation. MS-DOS is a trademark of Microsoft, Inc. PC-DOS is a trademark of IBM Corporation.

YES! Please send me a copy of **METHODS** for $250.

Check____ Money Order____ Visa____ Mastercard____

Card # _____ Exp. Date_____

Name_____

Address_____

City/State/Zip_____

Telephone ( ) _____

Signature _____

California residents add 6% sales tax. Outside U.S.A. add $15.00

Inquiry 108

The Micromint Collection

TERM-MITE ST SMART TERMINAL BOARD

TERM-MITE is a completely self-contained video display controller.



All you need to build a Smart Video Terminal equivalent to the types advertised for $1000 or more is a Term-Mite ST circuit board, scanned or parallel keyboard, video monitor and power supply.

- Uses brand new Nat'l Semi NS405 Terminal Processor.
- 24 lines by 80 characters, 25th reverse-video status.
- Upper & lowercase. Line (block) graphics.
- Selectable data rate, parity & display options.
- Reverse video, half intensity, double height & width, underline, blinking and/or blank character.
- Separate sync or composite video output. Self Test.

TERM-MITE ST Video Display Terminal Board
BCC22 Assembled & Tested . . . . . $284.
BCC23 Complete Kit . . . . . $244.

MPX-16 MICROCOMPUTER IBM PC COMPATIBLE



As featured on the cover of BYTE Magazine. Also featured in Ciarcia's Circuit Cellar November, December 1982 & January 1983

The Computer with a Split Personality

- Use it as an IBM PC look alike that directly boots PC DOS 2.0 and accepts all expansion boards designed for the IBM PC.
- Use it as a powerful 8088 single board computer for all your OEM applications. Just add serial terminal, disk drive and power supply. Directly boots CP/M-86.

Buy the MPX-16 in the form that best meets your needs or budget. As a bare board, as a wave soldered board that contains all components less ICs, as an assembled and tested circuit board or as a complete system.

- Directly boots PC DOS 2.0 and CP/M-86.
- Most IBM PC software executes with no modifications.
- IBM PC bus compatible +9 expansion slots.
- Intel 8088 16-bit microprocessor.
- Optional Intel 8087 math cocprocessor.
- 256K bytes on board memory.
- Up to one megabyte of system memory.
- Up to 64K bytes of system ROM/EPROM.
- 2 RS-232C Serial & 3 Parallel I/O ports.
- Disk controller for 5¼" or 8" drives.
- Sixteen levels of vectored interrupts.

MPX-16 Circuit Board Assembled w/64K RAM . . . . . $1,200.
OEM 100 quantity price . . . . . 840.
MPX-16 Circuit Board Assembled w/256K RAM . . . . . 1,400.
MPX-16 Semi-Kit (wave soldered circuit board w/all components) Less ICs . . . . . 595.
Complete Kit of ICs w/256K RAM . . . . . 595.
MPX-16 Unpopulated (bare) PC Board . . . . 300.
CP/M-86 Operating System + Manuals . . . . . 80.
MPX-16 Switching Power Supply . . . . . 300.
MPX-16 Technical Reference Manual . . . . . 50.
MPX-16 Metal Enclosure with Fan . . . . . 225.
Tandon TM 100-2 Double Sided/Density Drive . . . . . 300.
IBM/PC Keyboard Interface Adapter . . . . . 100.

Shipping and handling additional on MPX-16 orders.

IBM PC is a trademark of International Business Machines Inc.
CP/M-86 is a trademark of Digital Research Inc.
Z8 is a trademark of Zilog Inc.

Z8 COMPUTER SYSTEM

BASIC System Controller



The Z8 Basic System Controller is an updated version of our popular BCC01. The price has been reduced and features added. The entire computer is 4" by 4¼" and includes a tiny BASIC interpreter, up to 6K bytes of RAM and EPROM, one RS-232C serial port with switchable baud rates and two parallel ports. BASIC or machine language programming is accomplished simply by connecting a CRT terminal. Programs can be transferred to 2732 EPROMs with an optional EPROM programmer for auto start applications. Additional Z8 peripheral boards include memory expansion, serial and parallel I/O, real time clock, an A/D Converter and an EPROM programmer.

- Uses Zilog Z8 single chip microprocessor.
- Data and address buses available for complete peripheral expansion
- Can be battery operated.
- Cross assemblers for various computers.

New
BCC11 Assembled & Tested . . . . . $149. Low Price

FORTH Language Version

With the new Z8 with on board 4K FORTH you can program high speed control functions in a few simple high level language commands. Perfect for data reduction, process control and high speed control applications.

BCC20 Z8F FORTH Microprocessor chip . $150.
BCC21 Z8F FORTH System Controller (This board is a BCC11 with a BCC20 installed) Assembled & Tested . . . . . 280.

Memory, I/O Expansion, Cassette Interface

- 8K bytes of additional RAM or EPROM.
- Three additional 8 bit parallel ports.
- Cassette interface – 300 baud K.C. Standard.
- Software real time clock.

BCC33 w/0K RAM Assembled & Tested . . . $150.
BCC34 w/6K RAM Assembled & Tested . . . $180.

Eprom Programmer

- Transfer BASIC or Assembly Language application programs from RAM to 2716 or 2732 EPROM.
- Comes with programming & utility routines on EPROM.
- Requires Z8 I/O Expansion Board for operation.

BCC07 Assembled & Tested . . . . . $145.

Analog to Digital Converter

- Uses Analog Devices 7581 IC, 8-channel 8-bit.
- Adds process control capability to the Z8 system
- Over 1,000 conversions per channel per second.
- Monitors 8 analog signals in one of two 10v Ranges.

BCC13 Assembled & Tested . . . . . $140.

Serial Expansion Board

- Adds additional RS-232C and opto-isolated 20 ma. current loop serial port to the Z8 System.
- Runs at 75 to 19,200 baud in all protocols.
- Comes with listings of sample serial I/O routines.

BCC08 Assembled & Tested . . . . . $160.

16K Memory Expansion Board

- Add up to 16K of additional memory, RAM or EPROM, to your Z8 System Controller in any multiple.
- Accepts 2016, 6116, 2716, or 2732 memory types.
- Four 16K cards may be installed on the Z8 System bringing the total memory to 64K.

BCC14 Assembled & Tested w/4K RAM . $120.

Cross Assemblers

From Micro Resources
IBM PC, APPLE, 6502 Systems 5¼", CP/M 2.2 8" . . . . . $75.

From Allen Ashley
TRS-80 Model I, III, Northstar 5¼" . . . . . 75.
CP/M 2.2 8" . . . . . 150.

Five Slot Mother Board

- Expand your Z8 BASIC System with minimum effort.
- Contains five slots complete w/44 pin connectors.

MB02 Assembled & Tested . . . . . $69.

Triple Voltage Power Supplies

+5V @ 300 ma. +/- 12V @ 25 ma.
UPS01 Assembled & Tested . . . . . $35.
UPS02 Complete Kit . . . . . 27.
+5V @ 1 Amp. +12V @ .5 Amp. -12V @ 50 ma.
UPS03 Assembled & Tested . . . . . 60.
UPS04 Complete Kit . . . . . 50.

SPEECH PRODUCTS

Lis' ner 1000 Voice Recognition Board



Uses the new, high performance SP1000 voice recognition chip.

The LIS' NER 1000 provides voice input capability for your computer. The unit functions in the same manner as your keyboard, serving as a data entry device for application programs or the normal operation of the computer.

The LIS' NER 1000 recognition system works by analyzing human speech and extracting the most important features. These impressions of words are compacted into "templates" which can be stored and later compared to someone talking to the recognition unit. The LIS' NER 1000 supports a 64 word vocabulary in speaker dependent, discrete utterance mode. The recognition accuracy is greater than 98%. Each unit comes with a professional quality headband style electret microphone to assure accuracy, software on diskette and a user's manual.

The APPLE II LIS' NER board has provision for an SSI 263 phonetic speech synthesizer chip with text-to-speech algorithm, This addition provides all the features described for the Sweet Talker II as well as speech recognition.

APPLE II LIS' NER 1000 with SP1000 recognition/synthesis components only
VR01 Assembled & Tested . . . . . $189.
VR02 Complete Kit . . . . . $149.
APPLE II LIS' NER 1000 with SP1000 recognition/synthesis components and SSI 263 phoneme synthesizer chip with text to speech algorithm.
VR03 Assembled and Tested . . . . . $259.
VR04 Complete Kit . . . . . $219.
COMMODORE 64 LIS' NER 1000 with SP1000 recognition/synthesis components
VR10 Assembled & Tested . . . . . $149.
VR11 Complete Kit . . . . . $119.

Sweet Talker II Text-to-Speech Synthesizer



SWEET TALKER II, a 3rd generation speech synthesizer, is based on the SSI 263. SWEET TALKER II directly drives a speaker to provide music, sound effects and continuous speech of unlimited vocabulary at data rates as low as 50-70 bps.

- SSI 263-based Apple II compatible speech speech synthesis board
- Comes with text-to-speech algorithm on disk (DOS 3.3)
- Appropriate control inputs for mapping with several buses
- On-board 1 watt amplifier with volume control
- Measures 3" x 3¼"
- Operates on +5 and +12v

ST22 SWEET TALKER II Apple II compatible speech synthesizer with text-to-speech algorithm on disk . . . . . $104.

Microvox Text-to-Speech Synthesizer



Microvox is a professional voice quality text- to speech synthesizer that is easily interfaced to any computer, modem, RS-232C serial or parallel output device and provides speech of unbelievable clarity.

- Unlimited vocabulary.
- 64 programmable inflection levels.
- 6K text-to-speech algorithm.
- Full ASCII character set recognition and echo.
- RS232C and parallel input.
- 1000 Character buffer, 3000 optional.
- Adjustable baud rates (75-9600).
- Spelling output mode.
- 7 octave music and sound effects.
- On board audio amplifier & power supply.
- X-On/X-Off handshaking.

MV01 Assembled with 1K buffer . . . . . $349.
MV02 Complete Kit with 1K buffer . . . . . $269.
Add $15.00 for 3K buffer option.

Speech Synthesizer IC's

The **SC-01A Speech Synthesizer** is a completely self-contained solid state device that phonetically synthesizes continuous speech of unlimited vocabulary.

SC01A Quantity 1-99 . . . . . $32.
100+ . . . . . $24.
1000+ . . . . . call

The **Silicon Systems SSI 263 Speech Synthesizer Chip** is a third generation speech synthesizer chip that produces even more intelligible speech than did older devices. The SSI 263 has improved intonation, inflection and filtration.

SSI 263 Quantity 1-9 . . . . . $42. ea.
10-99 . . . . . $34. ea.
100 . . . . . $30. ea.

The Micromint is stocking thousands of SP1000 voice recognition chips. Call us for a quote.

MICRO D-CAM DIGITAL TV CAMERA



Give your computer the dimension of sight.

- Interprets, enhances and stores images.
- 256 x 128 digital image sensor.
- Plug-in boards for the IBM-PC, APPLE II or e.
- Software includes utilities for auto exposure, multi-level greyscale, screen dump and image enhancement.
- Includes interface card, 4 foot extension cable camera assembly, manual, and software on diskette.

DC01 IBM PC Assembled & Tested . . . . . $299.
DC02 IBM PC Complete Kit . . . . . $264.
DC03 APPLE II Assembled & Tested . . . . $299.
DC04 APPLE II Complete Kit . . . . . $264.

ULTRASONIC RANGING SYSTEM

The Micromint Sonar Ranging Experimenter's Kit is an updated and higher functioning version of the Polaroid SX-70 Camera sonar ranging circuit used in the original Polaroid Ultrasonic Ranging System Designer's Kit. There are similar performance characteristics but this unit requires far less support circuitry and interface hardware.

The TI ranging module can function between 4.5 and 6.8v. With a 5v supply, the ranging module I/O is TTL compatible and can be connected directly to most computers with one input and one output bit.

The Sonar Ranging Experimenter's Kit includes one SN28827 ranging module, one Polaroid 50 KHz electrostatic transducer, and user's manual with data sheets.

TI01 Sonar Ranging Experimenters Kit . . . $60.

300 BAUD ANSWER/ ORIGINATE MODEM KIT



Micromint's latest 300 Baud Modem Kit is crystal controlled, uses the TI TMS99532 IC, contains just 25 parts and requires no calibration or adjustments. Use with acoustic coupler or in direct connect mode.

MD04 Complete Kit as shown . . . . . $60.
MD05 Transformer for Direct Connect Mode $9.
AC01 Acoustic Coupler Kit . . . . . $20.

MICROMINT INC. *561 Willow Avenue, Cedarhurst, NY 11516*
To Order: *Call Toll Free 1-800-645-3479*
For Information Call: *1-516-374-6793*
Call: Monday-Friday, 9-5 PM

Inquiry 234

can alter attributes such as which keys repeat and their repeat speed. Joysticks are scanned as part of the keyboard. You can program up to 32 keys (except Escape) to produce user-defined strings or to generate any of the 255 (full 8-bit) characters. The Escape key is given special treatment; pressing it once suspends execution and a second Escape causes a break-out from the program, while any other keypress resumes execution. This global-friendly behavior should be a function of all operating systems, but usually it's left to individual applications and so is inconsistent.

The VDU is handled by two packs for text and graphics, which are coordinated by a third layer, the Screen Manager. All screen output on the CPC 464 is fully bit-mapped (maximum resolution: 640 by 200 pixels). Text and pixel graphics use the same 16K-byte buffer. The standard character matrixes are stored in ROM but the user can, as on the Commodore 64, download them into RAM and redefine them.

A special mode of character output called "transparent print" permits superimposing a character shape on the current screen contents (i.e., the cell background is transparent), so graphics can be annotated with text without making holes in the lines.

The CPC 464 supports three screen modes corresponding to 20, 40, and 80 columns, and the graphics pack is cleverly designed so that the plotting coordinates remain the same in all modes. A picture will remain the same size but will have coarser lines as the modes change. The cost of this scheme is that the screen memory map has a nasty, interleaved structure that complicates attempts to bypass the operating system and poke straight into it. On the other hand, the OS offers four graphics write modes (replace, and, or, xor) that allow a combination of the new pixel color with the current color so you can have tricky bit-plane effects if you stay legal.

The Sound Manager is complicated; suffice it to say that it maintains a separate sound queue for each of the three channels, and these are processed concurrently. When a tune requires synchronization, you can force a rendezvous between any or all of the queues. You can also cause a channel to hold until explicitly released.

The kernel is based around an event handler that is driven by a regular timer interrupt synchronized to the VDU frame flyback. Elapsed-time measurement for the BASIC multitasking is provided by a separate counter that counts these timer interrupts and

(continued)

2 YEAR WARRANTY ON CARD AND DRIVE

10 Mbyte
SATISFACTION GUARANTEED

Suggested retail price $1095
$945 SPECIAL SALE PRICE
Expires November 30, 1984
100% refundable within 30 days.

For IBM PC* & compatibles. 2 Years Warranty on disk drive and controller card.

- Half-height drive with controller card
- Low error rate
- Low power
- High performance and reliability
- Easy installation

20 Mbyte for $1,495.

TO ORDER SEND CHECK OR MONEY ORDER TO:
Linde Technology, Inc.
8820 S. Sepulveda Blvd.,
Suite 204
Los Angeles, CA 90045

OR CALL TOLL FREE:
1 (800) 227-2400 ext. 974
In California call
1 (800) 772-2666 ext. 974
Visa and MasterCard accepted.
California residents add 6½% sales tax.

For dealer inquiry and more information call: (213) 215-9484
*IBM is a registered trademark of International Business Machines Corp.

Yes, send me more information on:
☐ 10 Mbyte Disk Drive
☐ 20 Mbyte Disk Drive
Linde Technology, Inc.
8820 S. Sepulveda Blvd., Suite 204
Los Angeles, CA 90045
NAME _____
ADDRESS _____
CITY _____ STATE _____ ZIP _____

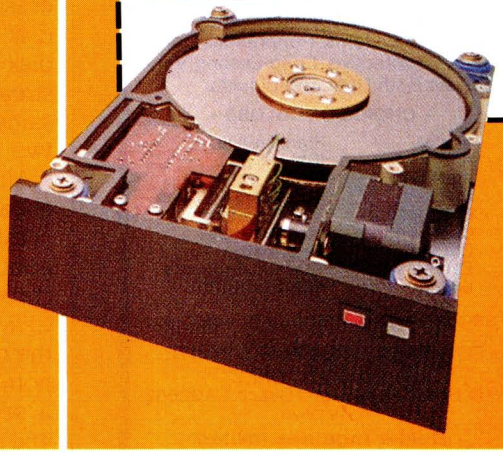

wabash
Warranted Integrity, Incredible Value
DISKETTES



M11 5¼" SINGLE SIDE SINGLE DENSITY SOFT SECTOR $1.19
M13 5¼" SINGLE SIDE DOUBLE DENSITY SOFT SECTOR $1.39
M14 5¼" DOUBLE SIDE DOUBLE DENSITY SOFT SECTOR $1.89
SOLD IN BOXES OF TEN ONLY

tremendous selection of software books, accessories and supplies
UP TO 50% OFF!
SOFTWARE FOR IBM PC

dBASE III	415.00	MULTIMATE	270.00
FRAMEWORK	430.00	SYMPHONY	449.00
HOME ACCT. PLUS	85.00	W.S. PRO PAC	265.00
" w/ULTRAFILE	169.00	ULTRAFILE	115.00

ABOVE SOFTWARE AVAILABLE IN OTHER FORMATS, CALL FOR AVAILABILITY AND PRICE.
Minimum shipping and handling $2.00. California residents add 6% sales tax. Prices subject to change without notice. Write for our free catalog.

ABC data products
P. O. BOX 16720, SAN DIEGO, CALIFORNIA 92116
619-283-5488 ☎ 800-854-1555

Inquiry 6

ANALOG I/O CAPABILITY FOR HP 150

- 16 CHANNEL A/D SINGLE ENDED
- 8 CHANNEL A/D DIFFERENTIAL
- 2 CHANNEL D/A
- 12 BIT RESOLUTION

- DISPLAY 1 TO 4 CHANNELS OF DATA ON SCREEN IN REAL TIME.
- BOARD MOUNTS IN ACC. SLOT OF HP 150.
- COMPLETE LOW COST SOFTWARE HANDLER AND EXAMPLE PROGRAMS AVAILABLE.

$995 QTY 1-5

CLINICAL MICROSYSTEMS, INC.
Box 1055
Melbourne, Florida 32936
(305) 723-5475

Inquiry 57

DUST COVERS

For Personal Computers and Small Business Systems, Peripherals, Game Units – Protective, Long-Lasting Vinyl Resists Both Dust and Liquids.

– CHOICE OF COLORS –

Amdek	Franklin Ace
Apple	IBM
Atari	Kaypro
BMC	Okidata
Columbia	Rana Systems
Commodore	Star Micronics
Corona	Televideo
Eagle	Texas Instruments
Epson	*PLUS OTHERS*

GROUP/VOLUME DISCOUNTS AVAILABLE

FOR **FREE BROCHURE** WRITE:
ENCHANTED FOREST
P.O. Box 5261, Newport Beach, CA 92662
(118 Onyx)
Dealer Inquiries Invited

The CPC 464 was designed to be used for serious work as well as for game playing.

then triggers an event. This avoids the heavy overhead of triggering a timer event every tick.

All the foregoing is documented in an impressive programmers technical manual that is clear, intelligent, and comprehensive (more so than those for many supposedly professional operating systems).

CP/M

As I write this column, Amstrad is a few weeks from releasing a disk drive for the CPC 464 based on the Hitachi 3-inch floppy disk, giving 180K bytes per side in "flip-over" two-sided operation. Two drives can be supported by the same interface and cable. At £199.95, the drive is cheaper than the notorious Commodore 1541.

Amstrad will supply CP/M free with the drive. A foreground ROM in the drive contains a special BIOS (basic input/output system) that actually works through the Amstrad OS ROM routines. When you boot a disk, the BDOS (basic disk operating system) and CCP (console command processor) will load into memory from disk as usual. You can also use the disk from Amstrad BASIC via a stream, and the file format will be the same as CP/M's to avoid introducing two different disk formats.

Although the CPC 464 will be the cheapest CP/M system available by a comfortable margin (just £400 or about $500 for a single-disk, monochrome system), it has limitations. CP/M was not designed to cope with the memory-mapped video of typical home computers, but for systems with a serial terminal. Because the CPC 464 has its screen buffer fixed in the upper 16K bytes of memory, it can support only a 43.5K-byte CP/M system, which leaves a transient program area (TPA) of some 36K bytes. Some CP/M software (including standard WordStar) needs more space. However, since 48K-byte CP/M systems were quite common until recently, a lot of older packages should work.

Overview

The technical problem posed to designers of low-cost home computers is: how can you support the color graphics, complex sound capabilities, acceptable speed, and adequate working store that the market demands, by using a cheap 8-bit processor with only a 64K-byte address space? The most obvious solution is not to try, but to use a 16-bit processor. The prices of 16-bit components and the relative lack of design and programming experience for them have delayed this natural step, although the picture will change drastically if Commodore drops the launch price of the Amiga to the rumored level.

The Amstrad approach might be the best compromise I've seen so far, providing fast (for an interpreter) and usable BASIC with more than average free workspace. The ROM paging system allows virtually unlimited expansion or reconfiguration of the firmware. Its closest competitors are the Commodore 64 and the proposed machines based on Microsoft's MSX standard. The operating firmware and BASIC are better thought out than the ad hoc jumble supplied by Commodore, while MSX is likely to be slower and offer less free workspace. On the other hand, both competitors offer sprites, and MSX has more powerful graphics commands (including a graphics macro language). The Amstrad compromise allows for the possibility that the CPC 464 will be used for serious work as well as game playing, although time will tell whether the marketplace agrees.

Heeding the dismal experiences of other U.K. manufacturers, Amstrad has no plans at present to launch the CPC 464 in the U.S.A. ■

Circuit-Board-Design Without the Tedium

smARTWORK™ lets the design engineer create and revise printed-circuit-board artwork on the IBM Personal Computer.

Forget tape. Forget ruling. Forget waiting for a technician, draftsman, or the CAD department to get to your project. smARTWORK™ software turns your IBM Personal Computer into a professional, high-quality drafting tool. It gives you complete control over your circuit-board artwork — from start to finish.



smARTWORK™ transforms your IBM PC into a CAD system for printed-circuit-board artwork. Display modes include both single-layer black and white and dual-layer color.

What makes smARTWORK™ so smart is that it understands electrical connections. Conductor spacing is always correct, lines don't become too narrow, and connecting lines do not intersect other conductors. smARTWORK™ can automatically find and draw the shortest route between two conductors. Or you can specify the route.

smARTWORK™ is the only low-cost printed-circuit-board artwork editor with all these important advantages:

- ☐ Complete interactive control over placement and routing
- ☐ Quick correction and revision
- ☐ Production-quality 2X artwork from pen-and-ink plotter
- ☐ Prototype-quality 2X artwork from dot-matrix printer
- ☐ Easy to learn and operate, yet capable of sophisticated layouts
- ☐ Single-sided and double-sided printed-circuit boards up to 10 x 16 inches
- ☐ Multicolor or black-and-white display
- ☐ 32 user selectable color combinations; coincident points can be displayed in contrasting colors.
- ☐ Can use optional Microsoft Mouse as pointing device

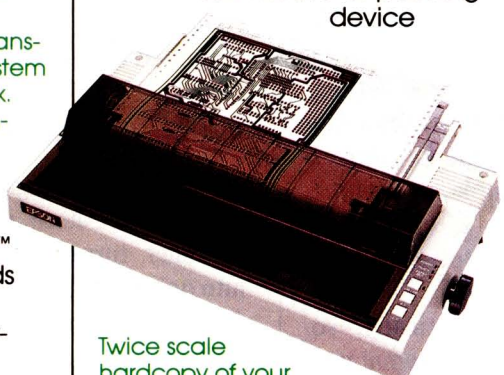

Twice scale hardcopy of your artwork is produced using the Epson dot-matrix printers or the Houston Instrument DMP-41 pen-and-ink plotter. Quick 1X check plot is also available from Epson printers.



Dual-layer color display of a 2" by 4" section of a 10" by 16" circuit board

The Smart Buy

At $895, smARTWORK™ is an exceptional value, particularly when compared to conventional engineering workstation costs.

Call or write us for more information on smARTWORK™. We'll be glad to tell you how smARTWORK™ helps us design our own circuit boards and what it can do for your business.

Send a purchase order, or major credit card number, and smARTWORK™ can be working for you next week.

System Requirements

- ☐ IBM PC or XT with 192K RAM, 2 disk drives and DOS Version 2.0
- ☐ IBM Color/Graphics Adapter with RGB color or b&w monitor
- ☐ Epson MX-80/MX-100 or FX-80/FX-100 dot-matrix printer
- ☐ Houston Instrument DMP-41 pen-and-ink plotter (optional)
- ☐ Microsoft Mouse (optional)

WINTEK

"smARTWORK" and "Wintek" are trademarks of Wintek Corporation.

WINTEK CORPORATION, 1801 South St., Lafayette, IN 47904-2993, Phone: (317) 742-8428, Telex: 70-9079 (WINTEK CORP UD)

INTRODUCING
Interface Technologies' Modula-2 Software Development System

The computer press is hailing Modula-2 as "the next standard in programming languages." Modula-2 combines the strengths of Pascal with the features that made C so popular, like independent compilation and direct hardware control.

But until today, no company offered a Modula-2 system that made the development of software fast, easy and efficient. Now, though, there's a new tool at your disposal.

The fast, powerful tool for programmers

The breakthrough is here: Interface Technologies' new Modula-2 Software Development System for the IBM® PC, XT, AT and compatible computers to give programmers the same quantum leap in productivity spreadsheets and word processors gave to end-users. It can reduce monotonous wait time, will dramatically increase speed, help stop thoughtless mistakes, and free you to become more creative in virtually all of your programming efforts.

How to speed input and eliminate 30% of errors

Thirty percent of programming mistakes are syntax errors and simple typos in the program structure. Our "syntax-directed" Modula-2 editor does away with these time-consuming headaches once and for all.

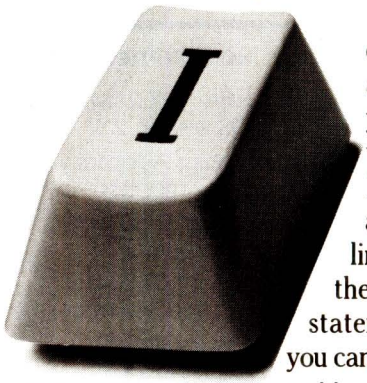

Enter complete statements with one keystroke.

It speeds input by cutting manual typing as much as 90%, letting you enter statements with a single keystroke. For example, if you type a capital "I" to begin a line, the editor completes the logical "IF THEN" statement automatically, so you can concentrate on what you want to program, rather than concentrate on what you're typing.

The editor locks out errors, finishing statements and procedures in perfect accord with the standardized rules of Modula-2. It also indents and formats your text automatically, making programs easy to read and maintain, an important feature on big projects.

And if you leave an undefined variable or data type, the editor detects the mistake and gives you the option of on-line "help" to correct it. No other programming text editor offers you so much innovation at any price.

How to turn "wait time" into "work time"

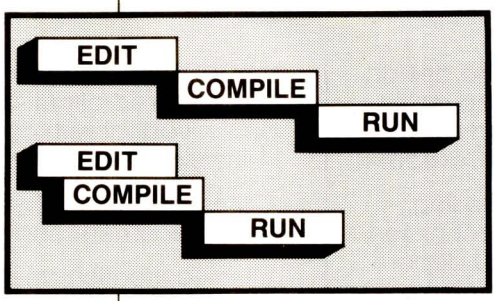

It not only has a faster compiler, it also saves time by compiling while you edit.

The vast majority of programming time is spent waiting, and the biggest slowdown is most often with compilers.

THE ANATOMY OF A

Our compiler turns wait time to work time with a new innovation that lets you compile in the "background."

With background compilation, your program is automatically compiled into object code line by line as you work, every minute you spend writing or editing a Modula-2 program!

When you're finished editing, all that's left for the compiler is a quick mopping up job that generates optimized native code in a single pass.

How quick is "quick"?

Thanks to background compilation and the fact that the compiler itself is so fast, Interface Technologies' compiler turns 100 lines of typical Modula-2 text into optimized machine code in *under five seconds.*

Plus the Interface compiler produces compact code with execution speed superior to that produced by any other Modula-2 compiler on the market.

How to do two things at once

Along with the background compiler and syntax-directed editor, which can save you hours every day and make you more productive, Interface Technologies' Software Development System gives your monitor

windows so you can refer to one file while you edit another simultaneously, saving you even more time.

Concurrent editing of two or more files is especially useful when doing programming work that's intended for separate compilation, and Interface Technologies has the only Modula-2 system on the market that provides you with this helpful benefit for developing software.



Work with multiple files faster, easier in windows.

How preprogrammed modules speed development

One of the advantages of Modula-2 is that it lets you build large, reliable programs quickly, by linking together many smaller "building-block" modules.

The development system's toolkit of precompiled program modules includes the standard Modula-2 library, and adds exclusive link-and-run modules for direct calls to the operating system, sound, and color graphics support. Plus you get low-cost updates from the Interface Technologies fast-growing library of new programming modules.

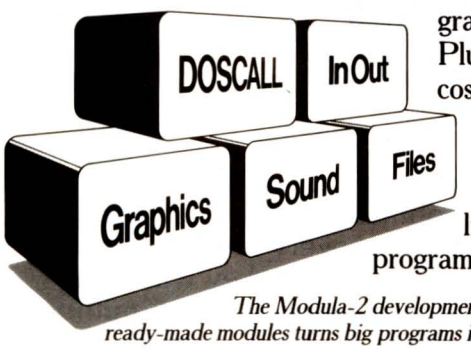

The Modula-2 development system's toolkit of ready-made modules turns big programs into smaller projects.

Increase productivity for $249

Interface Technologies' Software Development System is fast, powerful and unlimited. It works so well that it's the same tool Interface Technologies is using to write business and consumer applications in Modula-2.

For $249, you get the syntax-directed editor and compiler, linker, module library and tutorial that will have even modestly experienced programmers writing in Modula-2 in days. And you have full rights to your work; there's no license fee for programs you develop with the Interface Technologies system.

You can use it on any IBM® PC, XT, AT or compatible computer with two double-sided, double-density floppy drives and 320K RAM diskette.

You get a thoroughly indexed, comprehensive user's manual and free telephone support from Interface Technologies. But the most important thing you get is the future, and *the programming language of the future is Modula-2*, and now it's easier than ever.

For more information, or to order the Modula-2 Software Development System, call 1-800-922-9049 today. In Texas, call (713) 523-8422.

You can also order or request further information by mail. Just fill out the coupon below and send it in. Act today and receive your system soon.

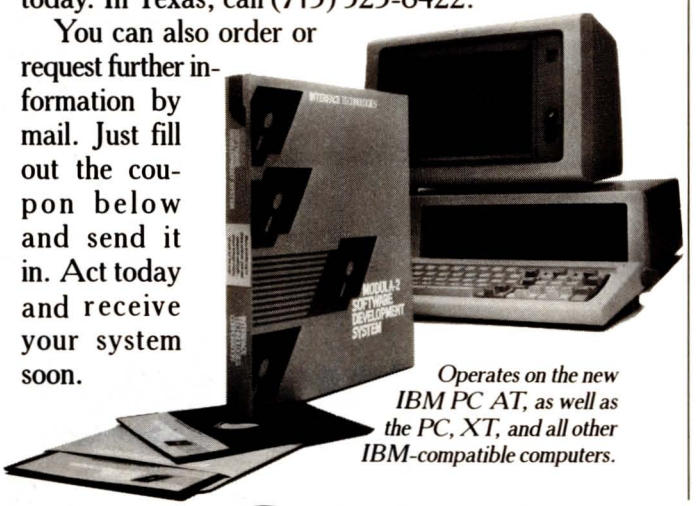

Operates on the new IBM PC AT, as well as the PC, XT, and all other IBM-compatible computers.

BREAKTHROUGH

NAME _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

PHONE _____

PLEASE CHECK ONE:

☐ AMERICAN EXPRESS ☐ VISA ☐ MASTERCARD

☐ CHECK ENCLOSED

CHARGE ACCOUNT NUMBER

☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐

_____ _____

EXPIRATION DATE SIGNATURE

PLEASE SEND ME _____ COPIES @ $249 EACH.

INTERFACE TECHNOLOGIES CORPORATION

3336 RICHMOND, SUITE 200, HOUSTON, TX 77098

Texas residents, add 6.125% Sales Tax. **BT/2**

IBM is a registered trademark of International Business Machines Corporation.

INTERFACE TECHNOLOGIES

MODULA-2 SOFTWARE DEVELOPMENT SYSTEM

This October, 1983 ad



pulled 2,391 sales leads. On page 489.

This is not an exception. In the same issue on page 409, WYSE Technology's ad generated 1,792 inquiries and the Prometheus ad – way back on page 495 – garnered 1,588.

Advertisers in BYTE receive an average of over 1,000 inquiries per page of advertising, an average of 1,300 for full-page or larger ads. And not just in special, front-of-the-book positions, but all through the pages of BYTE.

Why? Because more than 400,000 high-tech computer sophisticates pay to read BYTE – cover to cover every month – for the microcomputer information they want and need. They'll send advertisers over 6 million ad inquiries this year, and over a half a million BYTE readers will buy products from ads they've seen in BYTE.

Including yours.

Talk to us – we're the people who wrote the book on microcomputer marketing. Just call Pete Huestis, Advertising Sales Manager, at (603) 924-9281.

BYTE THE INTERNATIONAL STANDARD

BYTE is published monthly by McGraw-Hill, Inc., with offices at 70 Main St., Peterborough, N.H. 03458

C·I·R·C·U·I·T C·E·L·L·A·R F·E·E·D·B·A·C·K

Conducted by Steve Ciarcia

More I/O

Dear Steve,

I would like to embark on my first hardware project by building a home-control system constructed around a Z80-based Heathkit H-89 CP/M computer. My problem is the I/O interface. My computer has only two available I/O slots. I need more, so I want to build a board that fits into the processor socket and runs all the signal lines into a ribbon cable that connects to new I/O slots. This board will also contain the processor IC. I will have to bypass the I/O-mapping ROM in the computer to enable the new I/O slots. What do you think, Steve?

Charles M. Fingerman
Toms River, NJ

My April article will address most of your questions on I/O for a home-security system. The system will use a microprocessor that sends its control signals through the power lines to various BSR modules but has closed-loop input and output lines in addition. While my unit is built around a Motorola 6800 microprocessor, the techniques and software should be applicable to your Z80 system.

You may want to consider my unit for your control applications and merely use your H-89 to remotely communicate with my home-control system. Tying up an entire Z80-based CP/M system for home control is a bit of overkill. A small, dedicated controller is more practical.—Steve

Term-Mite and Color Television

Dear Steve,

I want to build the Term-Mite smart terminal that you described in the January and February 1984 issues of BYTE. Can you tell me how to connect the composite video output of the Term-Mite to a color television?

Robert E. Scott
Lawrenceville, GA

The composite video output of the Term-Mite is similar to the composite output of any computer and will directly drive a video monitor. To drive a color or black-and-white television, this composite video signal must be superimposed on a radio-frequency signal so that the television can receive it. The device to do this, an RF modulator, is available at almost any computer or electronics store.

Simply connect the video output of the Term-Mite into the RF modulator, connect the modulator output to your television antenna terminals, and apply power to all units. Turn the channel selector to the channel for which the modulator is designed and adjust the fine-tuning control as required.—Steve

Simple Clock Not So Simple

Dear Steve,

In your May 1982 article you highlighted the then-new MM58167A clock chip and its companion, the MM58174A. I wired the MM58174A to my Apple II to use the chip as a simple clock. Though I did so exactly as shown in National Semiconductor's data sheet, one problem has always remained: the interrupt output refuses to work as it's supposed to. I followed the interrupt-setting procedure but could get no more than a single immediate pulse or a change of state. As you may know, the interrupt is supposed to be programmable for three different intervals, single or repeated. Do you have any idea what I can do to resolve the problem?

Lance Walley
Carmichael, CA

A rather subtle problem exists with the MM58174A real-time-clock chip. It is relatively slow when compared to a typical microprocessor clock cycle, with access times on the order of 1 microsecond. An interrupt pin is available to introduce wait states for the read and write cycles of the microprocessor to offset this timing difference. This is fine for an 8080 system that supports such wait states but cannot be directly implemented on your Apple II since the Ready input of the 6502 is available only during a read cycle.

One solution would be to drive the MM58174A chip through a PIA or VIA chip such as a 6520 or 6522. One port can be used to latch the address of the desired clock registers, and the other used to write data on a subsequent cycle.
—Steve

Trump Card Harmony

Dear Steve,

Will the Trump Card (May and June 1984) memory interface with other cards in the computer? Also, can I use it as RAM in addition to other RAM boards in the system?

Chip O'Neal
Orlando, FL

The Trump Card memory is totally independent of the memory in the host computer and does not take up any space in the host memory map. The other memory boards in the system will operate the same as they did before the Trump Card was installed. The memory on the Trump Card can be used as an independent spooler and RAM disk for the host system when not being used to run any of the Trump Card languages. In this mode, the Trump Card memory acts like an extra 512K bytes of memory added to your system.—Steve

A Mistake?

Dear Steve,

I really enjoyed your BYTE articles on the Trump Card, and I intend to implement it in part or whole some day. I may not fully understand the circuit, but there are a couple of anomalies I want to ask about and some ideas that I would like to hear your reaction to.

The $\overline{\text{INH}}$ line of the Z8581 clock IC is tied to ground on the Trump Card circuit. The Z8581 data sheet indicates that this should make the $\overline{\text{ADD1}}$ and $\overline{\text{ADD2}}$ lines inactive. Yet, you have logic feeding $\overline{\text{ADD2}}$. Is something drawn wrong, or am I misinterpreting something?

The 6116 buffer is normally a 2K by 8-bit RAM, but the Trump Card appears to use only 256 bytes of it, since only eight of the address lines are fed from the counters. I suppose that's enough, but it

(continued)

COPYRIGHT © 1985 STEVEN A. CIARCIA. ALL RIGHTS RESERVED.

seems a waste. Would there be any advantage to adding another 74LS393 or similar (maybe single 4-bit) counter to supply the other three address lines? I realize the software on both sides would have to be changed to make use of the larger buffer size.

Your software and documentation offer sounds almost too good to be true. Is the host (IBM PC) software locked into the IBM or the 8088? The reason I ask is that I would really like to implement a Trump Card and use the software package you are offering, but my present system is a Heath H-8 with an 8080 processor. I may someday change to a Z80, but I don't expect to go to an 8088. I can't justify an 8088-based system, IBM or otherwise, since my current system does what I need as it is.

So why implement the Trump Card? I guess I've got solder in my blood and a hacker's spirit of adventure. (I also prefer programming in solder and wire.) Anyway, since I do my software hacking in C (mostly) or assembly language, I don't see any problem making the Trump Card work with my 8-bit CP/M system, assuming that the source for the host code is available (hopefully, part of your offer). As a matter of fact, I like C so much that the C compiler part of your software offer is the most important part to me. The Z80 emulator sounds interesting, though. Does it emulate any specific operating-system calls (BDOS or BIOS), or does the application software have to know that it's talking to another processor through the FIFO buffer? If I can plug a Trump Card into my CP/M-80 system, I won't have to even consider getting an 8088 or other 16-bit processor, will I? With TBASIC and Z8000 C, and Pascal on the way, what more could I want?

DWAIN HENDERSON
Florida, NY

Yes, something is wrong! The four pins on the Z8581 clock chip numbered 4, 8, 9, and 10 are mislabeled but wired correctly. They should be labeled as follows:

Pin 4	*$\overline{INH}$*	*HI*
Pin 8	*C0*	*N/C*
Pin 9	*C1*	*N/C*
Pin 10	*$\overline{STRT}$*	*LOW*

This arrangement allows ZCLK to be stretched by one period when $\overline{ADDR2}$ is low to account for the slower PROM memory.

Again, you are correct about the Trump Card using only the first 256 bytes of the 2K-byte 6116 buffer. A smaller static RAM could have been used in this case, but the low cost and availability of the byte-wide 6116 outweigh any advantage of using the smaller RAM. There is no advantage in board space with the smaller RAM since the available 256-byte RAM chips are 4 bits wide, and two chips would have been required for the buffer.

You can add an additional 74LS393 and use more of the 6116, but since much of the I/O between the Z8001 and the 8088 consists of short commands, this would only add an additional delay in these operations.

Your ideas about using the Trump Card with another host processor can be implemented, but the object code for LDSYS would have to be modified to accommodate your new host. Unfortunately, at the moment the source code for the LDSYS program is not part of the available software package.

The Z80 emulator supports most of the standard CP/M BIOS calls, except for calls dealing with the disk, the punch, and the reader. The calls that are supported by the emulator are listed in the software manual for the Trump Card.—Steve

SPEECH CHIPS

Dear Steve,

After reading your article "Use ADPCM for Highly Intelligible Speech Synthesis" in the June 1983 BYTE, I became interested in building the circuit you described. Since I am not familiar with the ICs used, I would appreciate it if you can send me more information concerning the design of this circuit. I would also like to know if there have been any new developments in this area of waveform speech synthesis. Finally, are there possible variations on the circuit built around the Oki MSM5218?

JOE LEE
New York, NY

The chips used in that article are manufactured by Oki Semiconductor, 1333 Lawrence Expressway, Suite 401, Santa Clara, CA 95051, (408) 984-4842.

Oki has several technical data sheets that give additional information and applications. Two of them are "Simultaneous Speech Analysis and Synthesis with the OKI MSM5218" and "Speech Synthesis using the OKI MSM5205 ADPCM Speech Synthesizer Circuit."

The information in my article and the additional data from Oki should give you the background you need to build your own speech circuits. If you are unfamiliar with such circuits, build the one described in my article first. After you understand how it functions, you can adapt your own variations.—Steve

DO I HAVE CIRCUITS?

Dear Steve,

Your July 1984 article about the Whimsi-Bell contained information and circuits on a ring detector for the phone line. Do you have circuits that will detect the busy signal and dial tone?

PAUL J. ROUMANIS
Roanoke, VA

Dial tones, busy signals, ringing tones, and recorder tones are known as call-progress tones. They are easily detected by specialized integrated circuits. One company making such chips is Teltone, 10801 120th Ave. N.E., POB 657, Kirkland, WA 98033, (800) 227-3800 ext. 1130.

Its M-980 is a CMOS call-progress tone detector that monitors dial tone, circuits-busy, station-busy, audible ringing, and other call-routing tones in the 300–640-Hz band. It operates from a single 5-V supply and uses a color-television crystal (3.58 MHz).

The M-982 gives precise detection of the four common call-progress tones and features Tri-state output. It too is powered by a single 5-V supply and uses the 3.58-MHz crystal time base.

My March project is building a Touch-Tone interactive messaging system.
—Steve

BUT WILL IT WORK IN HOBOKEN?

Dear Steve,

Many thanks for your article about the ECM-103 modem in the March 1983 issue. Here in Switzerland our CCITT-compatible modems use 980 Hz for a 1 and 1270 Hz for a 0 in the originate mode and 1650 Hz for a 1 and 1850 Hz for a 0 in the answer mode. Can I make any modifications so that your modem will work here?

KARL KLINGLER
Zürich, Switzerland

The Texas Instruments TMS99532 modem chip is designed to be Bell-103-compatible and will not work with the CCITT format. However, the TI TMS99534 modem chip is designed for the CCITT format and will work fine, just replace the TMS99532 with the TMS99534 and you have a CCITT-compatible modem.—Steve ■

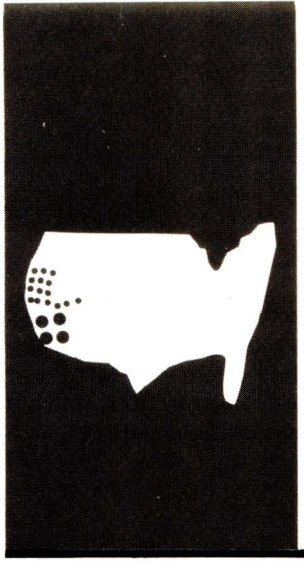

Light Touches

Macs, Mice, and Laser Disks

BY JOHN MARKOFF AND PHILLIP ROBINSON

Apple Computer's policy of seeding college campuses with Macintosh computers is starting to bear fruit. On a recent visit to Reed College in Portland, Oregon, we saw a number of commercial-quality programs for the Macintosh. All were developed by students and faculty, under the direction of physics professor Richard Crandall, in the college's newly established "Maclab." Crandall's direction of the Maclab has given him a key role in planning the college's computer future.

The plan is for Reed College to become a heavily computerized liberal arts campus of the future, and the Macintosh software-development effort is just the first step in a five-year program. Ultimately the plan will supply each member of the Reed academic community with a Macintosh computer, link classrooms, dormitories, and administration buildings by means of an Ethernet-type local-area network (LAN), and provide high-bandwidth access to microprocessor-based, timesharing network nodes.

According to Crandall, the people at Reed College are working with the Intel Corporation on the LAN aspect of the five-year program to develop the "ultimate Macintosh network." Their goal is to develop individual, $5000, 32-user, timesharing network nodes that can be distributed around campus. Crandall refers to the network as a "running-water network," in which faculty, students, and administrators will have "taps" into dispersed computing and storage resources. The plan calls for the network to be "iconic," depicting such remote resources as file, communication, and print servers with pictographs.

Reed College has set up a private corporation, Metaresearch Inc., to market products developed in the Maclab. Metaresearch currently offers GriffinTerminal (a terminal program for the Macintosh with Tektronix terminal-emulation capability for $89), GriffinText (a simple text editor), and the EMM-2048a Universal Microcontroller, an Intel 8031 microprocessor-based stand-alone serial laboratory interface to the Macintosh.

Students and faculty at Reed have developed software and hardware that permit the Macintosh to emulate more expensive laboratory instruments. Simple demonstration projects include a light meter and thermometer written in MacPascal, the interpreted Pascal language developed for Apple by Think Technologies Inc. The light meter displays the logarithmic light intensity measured by a photosensitive cell connected to the Metaresearch EMM computer. A light-meter-type dial is drawn on the Macintosh screen using both Apple's QuickDraw and additional graphics routines. The beefed-up graphics software lets the light-meter program create a picture based on a real-value coordinate system (as opposed to the Macintosh system, which permits only integer values for coordinates). The thermometer program takes temperature data input via the EMM interface and draws a thermometer on the screen with a range of 54 to 104 degrees Fahrenheit. The degrees are five pixels apart on the Macintosh display.

The EMM Universal Microcontroller can be used for a wide range of interfaces—process control, energy management (Reed is already using a similar system for on-campus energy management), and laboratory test management. Up to 256 separate microcontrollers may be networked and controlled by a single terminal or computer with an RS-232C interface. The EMM has 2K bytes of on-board RAM (random-access read/write memory) for program and/or data storage. Monitor software that resides in 4K bytes of ROM (read-only memory) includes communications routines and functions such as selecting a multiplex channel, setting and reading I/O (input/output) ports, accessing the real-time clock, digital-to-analog (D/A) and analog-to-digital (A/D) con-

(continued)

BYTE West Coast is prepared monthly by BYTE's editors and staff in San Francisco and Palo Alto. Correspondence should be addressed to BYTE West Coast, BYTE Magazine, 425 Battery St., San Francisco, CA 94111.

Higher-resolution mice cut down work-surface movement while still letting you point to individual pixels.

version, reading the auto-ranging frequency counter, and displaying memory and registers.

The EMM hardware includes both 8-bit and 12-bit CMOS (complementary metal-oxide semiconductor) multiplying D/A converters, comparators for A/D conversion, a 13-bit voltage-to-frequency converter, a real-time clock, onboard SIN (symbolic integrator), and TTL (transistor-transistor logic) square-wave generators, an 8-channel analog CMOS multiplex switch, 16 bits of TTL I/O, eight diode-protected relay drivers, and optoisolated serial communication lines.

In a network, each EMM can be individually addressed and controlled (there is an onboard 8-bit network address jumper), either manually or under program control.

The GriffinTerminal communications program was originally written to provide Reed's Macintosh users with high-speed access to the campus mainframe computers. It has full Tektronix 4012 terminal-emulation capability to let it run graphics programs on the host computers and display the output on the Macintosh. Additionally, GriffinTerminal can be set for data rates ranging up to 38,400 bps. It can save graphics screens in MacPaint format and transfer 8-bit text and graphics files between the Macintosh and host computer. GriffinTerminal lets you control the cursor location with the Macintosh mouse. The software translates mouse movement into *x,y*-coordinates and then sends them back to the host computer.

Tailless Mice

It had to happen. When Metaphor Computer Systems, a recent addition to Silicon Valley, introduced its sleek new information-retrieval system, those who looked closely noticed that the workstation came with a tailless mouse. In fact, founders Donald Massaro and David Liddle also left off the cable for the keyboard and the auxiliary keypad. In its place, they chose an infrared technology that resembles the IBM PCjr keyboard arrangement. There are significant differences, however. The Metaphor infrared transmitter/receiver has a shorter physical range, operates on multiple frequencies, and has a wide field of view (270 degrees).

Metaphor decided to use a cordless mouse because it wanted a highly ergonomic workstation for executives who weren't used to having computers on their desks. The Metaphor mouse is easily used by both left- and right-handed people and comes with a rechargeable nicad (nickel-cadmium) battery. To conserve power, the mouse goes to sleep if you don't use it for more than one minute. It wakes up again when you move it or click one of its buttons. When the mouse isn't in use, you store it (along with the keyboard and two separate keypads) in the terminal's special recharging sockets.

Now that mice are becoming more popular, it has become apparent that their design problems are much more subtle than previously suspected. Issues include resolution, optical versus mechanical technologies, and even the appropriate number of buttons.

Metaphor turned to Logitech, a U.S./Swiss company, for development assistance. For Daniel Borel, a Logitech vice president involved in designing the Metaphor tailless mouse, resolution has become crucial as high-resolution, bit-mapped displays proliferate. In particular, higher-resolution mice cut down work-surface movement while still letting you point to individual pixels. If you use a mouse with a resolution of 200 dots per inch (dpi), says Borel, you should be able to move the cursor from one side of the screen to the other without being forced to lift and reposition your hand.

THE $2395 DEVELOPMENT SYSTEM

Turns any personal computer into a complete microcomputer DEVELOPMENT SYSTEM. Our integrated control/display program runs under MS-DOS, CP/M, ISIS, or Apple and controls the UDL via an RS-232 port.



Up to 128K bytes of EMULATION ROM (8K standard) allows you to make program patches instantly. Since the target ROM socket connects data and address lines to both the analyzer and the emulator, no expensive adaptors or personality modules are needed.

The powerful BUS STATE ANALYZER features four-step sequential triggering, selective trace, and pass and delay counters. Symbolic trace disassemblers and debuggers are available for Z-80, 8048, 6500, 6800, 8031, 8085, Z-8, 1802, 8088/80188, 8086/80186, R65 and 68000.

The PROM GENERATOR also doubles as a STIMULUS GENERATOR.

For further information, call or write:

ORION Instruments 172 Otis Ave., Woodside, CA 94062

(415) 851-1172

Inquiry 265

According to Borel, the Apple Macintosh mouse, which has coarser resolution, gives the illusion of high resolution by employing a "software gearshift" mechanism. When the Macintosh mouse is moved quickly in any direction, the cursor moves several pixels at a time. Borel argues that this is only a partial solution. If the mouse is moved at different rates of speed, he says, it will gradually relocate itself on your desk (i.e., its 0,0 position on an imaginary work surface *x,y* graph will "drift"), forcing you to pick it up and replace it in its original position on your work surface.

Mice sense motion differently, depending on whether their basic design is mechanical or optical, and each type has its own advantages. Optical mice are generally said to be quieter and more reliable than their mechanical cousins as they have no moving parts. On the other hand, the optical mice require a special reflective surface.

The Logitech mouse employs a hybrid of the two technologies. It has a specially coated metal ball for tracking its movement across the work surface. The coating is important because it makes the mouse significantly quieter and because rubber balls tend to pick up dirt. However, the mouse optically decodes the movement relayed by the ball with photo diodes and sensors inside its housing. This design makes it extremely simple for Logitech to increase the resolution of its mouse; models have been manufactured with resolution in excess of 380 dpi.

The Logitech mouse is also microprocessor controlled and therefore is quite flexible in meeting different protocols. The Motorola 6805 is used in the standard design and a CMOS part was added for Metaphor. It can be reconfigured in firmware to meet either the Summa, Microsoft, or Mouse Systems requirements.

Borel argues that communications speed is an important factor in mouse design. Given the increasing popularity of high-resolution displays (the Metaphor workstation has a resolution of 896 by 960 pixels, and displays of 1024 by 1024 pixels are not all that unusual), he makes the point that you need high bandwidth between the mouse and the system in order to reproduce the mouse's movement accurately. The bit rate of the Logitech product is selectable under program control from a range of 1200 to 9600 bps.

Borel is pleased that Logitech has been successful in gaining a foothold in the growing mouse market. There were times over the past two years, he says, when he was discouraged by

(*continued*)

NEW PC MAIN/FRAME
FOR S100 BUS OR SINGLE BOARD COMPUTERS

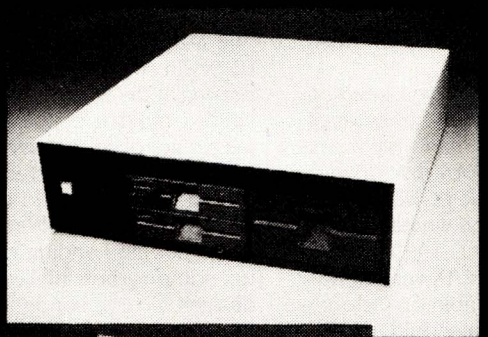

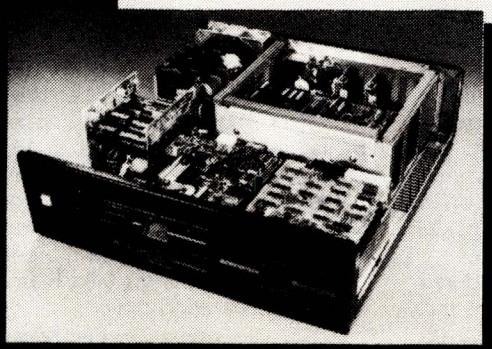

- Low Price - Model 2210 (shown) $350*
- Low Profile - Set display on top, keyboard in front
- Laser/3000 - Modern office styling - Model 3310 $387*
- 5¼ Winchesters & Floppies - Full or Half
- 4 Card S100 Motherboard and Connectors
- Accomodates I/O Personality Boards
- Hefty Power Supply - S100 and Drive, Controllers
- Multifan, Push-Pull Cooling System
- Multiple EMI Filters
- Switched AC Outlets
- INTE/National Power Supply 115/230, 50-60 Hz

*Call for quantity pricing

Write or call for our brochure which includes our application note "Making micros, better than any ol' box computer."

INTEGRAND
RESEARCH CORPORATION
8620 Roosevelt Ave./Visalia, CA 93291 209/651-1203
We accept BankAmericard/Visa and MasterCard

Disk drives & computer boards not included

Inquiry 173

what seemed the almost universal rejection of the mouse in favor of keyboards. Another factor contributing to his discouragement was the mouse's dependence on slow-to-develop software technology. "People miscalculated the complexity of interfacing the mouse," he notes.

A Laser Disk for Databases

The optical disk drive from Reference Technology won't replace Winchesters; it can only read, not write, data. But its use of cheap, removable disks makes it ideal for "electronic publishing and information distribution"—a phrase that turns up repeatedly in Reference Technology

A Trip to the UNIX Show

September's UNIX Systems Expo/84 in Los Angeles wasn't a huge affair like COMDEX or a West Coast Computer Faire, but a lot of the big guns were there: AT&T, IBM, Honeywell, Digital Equipment Corporation, Tandy, Data General, and so on. Because the show was dedicated to UNIX, rather than personal computers, there were many firms displaying minicomputer software and hardware. However, the interest in microcomputers was obvious. XENIX was running all over the place—on IBM Personal Computers (PCs), Tandy Model 16Bs (one with a Model 100 as a terminal), and Lisas (one with a Macintosh running MacTerminal hooked to the Lisa). IBM was showing PC/IX on ATs and XTs and was selling it for $800 (the list price is $900).

Plenty of people were showing connections between UNIX systems and DOS-type personal computer systems. AT&T, for instance, had one of their 3B2s connected to a 6300 PC. The 6300 could directly call up a DOS application that was stored on the 3B2 hard disk, which was controlled by UNIX.

Another DOS–UNIX link was shown by Computerized Office Services Inc. (COSI). This scheme uses the UNIX machine to direct the workings of various DOS machines. Jeff Spencer of COSI regaled me with the vision of an office of PCs left idle at night transformed into an office where they were left on for the big guy (probably a VAX) to slave drive. The COSI software on the VAX finds a sleepy PC and barks out orders to run this or that application and report back when done.

A different approach, and the one of most immediate use to those with a single system, was exemplified by the first appearance of a product from Uniform Software Systems called The Connector. This program allows DOS to be run as a UNIX (in this case, PC/IX) process. In turn, DOS can then run applications—all without leaving UNIX. The particular advantage of this approach (having DOS under UNIX instead of just co-resident on the disk) is that other UNIX processes can be running simultaneously with the DOS applications. I watched Lotus 1-2-3 running underneath DOS underneath UNIX—all without the XT leaving UNIX. Switching from DOS to UNIX is very simple. DOS is treated as a UNIX process so you don't have to alter any of the UNIX procedures and operations. The Connector comes on a single disk and can then be stored on the hard disk. Entering a command as simple as "dos" lets you move to DOS and "unix" lets you move back.

The Connector automatically sets the DOS date and time from UNIX. To run a DOS application you can enter DOS and then use the standard procedure to call the program. Alternatively, you can create a special link to enter the application call directly from UNIX. Files can also be exchanged between UNIX and DOS.

To run The Connector you need an IBM PC XT with at least 512K bytes of RAM (random-access read/write memory), a dual-sided floppy-disk drive, a 10-megabyte hard disk, PC/IX, PC-DOS (1.0, 1.1, 2.0, or 2.1) and whatever DOS applications you want. The program costs $299, and the PC/IX version was supposed to be available on October 15. The Venix version should see the light of day by December 15.

I was assured there would be no problem getting The Connector up on the IBM PC AT, though it hadn't actually been done by the time I saw it. The only problem, and again I was assured that it is a small problem, is that UNIX runs in the protected mode and DOS in the unprotected.

In an unrelated matter, I wandered into the small Sun Microsystems Inc. booth. The Sun workstation has a 42-megabyte disk, 68010 CPU (central processing unit), 1-megabyte RAM, runs UNIX 4.2 with a proprietary window system, and can drive the screen with magnificent resolution. I asked, just to get the official line, what was the advantage of having this expensive microcomputer over having a terminal hooked to a VAX? A foraging software engineer who was playing with the Sun stopped, glanced dryly at me, turned back to what he was doing, and contributed a few comments about how slow a VAX can get when several engineers are crunching on it.

Finally, there seems to be an interesting relationship between UNIX and men's fashions. While I was watching the melee at the L.A. International Airport rental-car counter, I was told that there weren't any cars available because of The Magic Show. The Magic Show turned out to be a Men's Fashion Extravaganza. Larger than the UNIX show, it was also accorded more importance at the L.A. convention center. The Magic Show had shuttle buses; UNIX did not. The Magic Show got free parking at the Shrine parking lot; when I pulled into that lot, the attendant gave me a quick once-over and said, "UNIX." I agreed, and he directed me back out into the street. When I arrived at the convention center, there were Magic Show people handing out brochures for some rather interesting clothing designs. No one handed one to me. In fact, I failed to fool anyone into thinking that I was attending a fashion show. As the coup de grace, Magic Show attendees got complimentary passes to the UNIX show; UNIX show participants did not get treated in kind. Perhaps it was the miniature red dirigible tethered to the UNIX show's roof. With its three bomb-like fins and its "USE/84" slogan, it looked more like a commentary on arms talks than an invitation to a good time.

—*Phil Robinson*

literature. It isn't inexpensive—$8900 apiece in lots of 100—but it offers direct, fast access to 1 gigabyte of cheaply stored information (a disk costs only $14 in quantity), and the drive's speed makes it a fine candidate for multiuser systems.

Reference Technology, located in Boulder, Colorado, is just beginning to explore this new market. Prior to September, only seven units had been shipped. According to Ronald Rediesel, vice president of strategic marketing, most of the company's sales will be to OEMs (original equipment manufacturers). The OEMs, in turn, will take the disk drive, add a particular set of data, some software, and a controlling computer system, and then resell the entire package.

The Reference Technology CLASIX (Computer/Laser Access Systems for Information Exchange) DataDrive holds 1 gigabyte per disk side. The DataDrive uses a CAV (constant angular velocity) scheme and can transfer data at 1 megabyte per second. There are 51,000 tracks per side, 2 fields per track, 11 planes per field, and 892 bytes in each plane. That yields a data-carrying capacity of 19,624 bytes per track and 15,000 tracks per inch. The average access time is 151 milliseconds, with an average seek time of 125 milliseconds. The disk rotates at 1800 rpm (revolutions per minute) and is read by a single head. It takes the drive about 20 seconds to get the disk up to speed and about 10 seconds to stop it. The significance of the tremendous access speed is apparent when searching through huge databases. The next generation of full-size DataDrives will be coming out in 1987 with better access times and greater storage density, as well as double-sided drives.

The DataDrive uses a standard, prerecorded NTSC (National Television System Committee) videodisc of aluminized acrylic (stamped by the commercial videodisc process) that comes in a plastic carrier. It can hold digital data, still-frame, or full-motion video, and analog or digitized audio.

The entire drive measures 8.4 by 16 by 23.6 inches and weighs 70 pounds. The DataDrive connects to the SCSI interface. With a video option kit, which can be added at the factory or in the field, it can read mixed video, audio, and digital information.

The TRIDECC error-correction and -detection technology is an important element of this system. TRIDECC is a Reference Technology proprietary, three-dimensional, interleaved, Reed-Solomon code with 26 percent redundancy at a data density of 1 gigabyte per disk side. The maker claims that it will correct input-error rates as high as 1 percent and will yield output-error rates of less than 1 in 10 trillion

(continued)

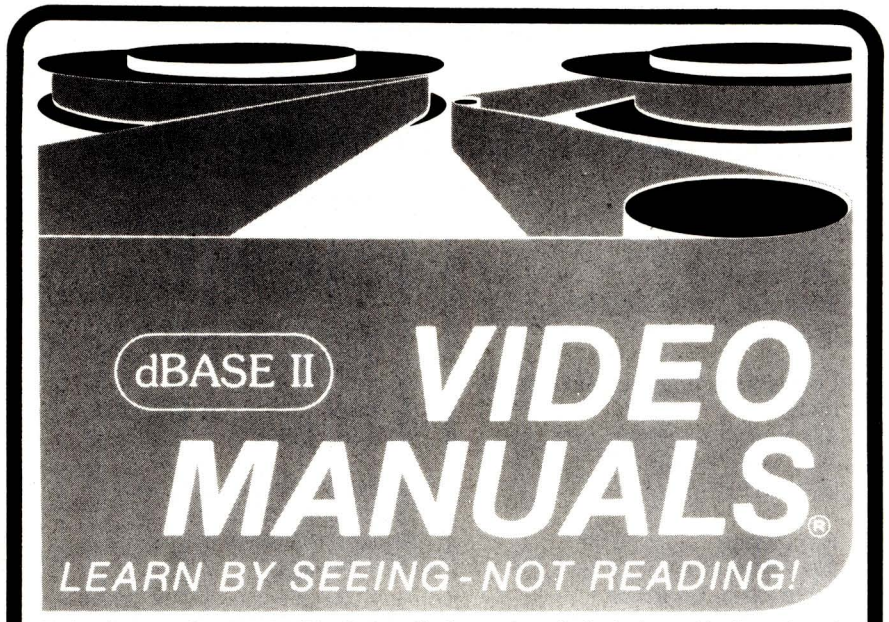

Each subject is a 3-tape series. *The Basics* will take you from the beginning and lead you through dBASE II commands. You will soon be creating your own databases, editing files, deleting records, etc. *Application Programming* will teach you program layouts, loops, structures and so much more. You will be writing your own programs within hours.

dBASE II®

#DB125 - THE BASICS
#DB135 - APPLICATION PROGRAMMING

Coming soon...
dBASE III®
WORDSTAR®
MS-DOS®
CP/M®
LOTUS 123®
MULTIPLAN®

* MultiPlan and MS-DOS are registered trademarks of Microsoft, Inc. CPM is a registered trademark of Digital Research. Wordstar is a registered trademark of Micro Pro. dBASE II and dBASE III are registered trademarks of Ashton-Tate. Lotus 123 is a registered trademark of Lotus Corp.

VHS-BETA

$149.95 DB125 OR DB135 $279.95 BOTH DB125 & DB135

VISA MasterCard COD, CHECKS, M/O

— ORDER BY PHONE —

Call Toll Free 1-800-624-4525
From California 1-916-546-3371

Western Video Productions

P.O. Box 2300
8079 N. Lake Blvd.
Kings Beach, CA 95719

bytes. Without excellent error detection and correction, such huge volumes of data would not be useful.

Reference Technology sees OROM (optical read-only memory) augmenting rather than replacing traditional data-storage techniques. Some of OROM's most obvious markets include: library services (card catalogs, bibliographies, indexes); legal services (case and patent law); medical-information services; scientific and technical services (specifications, abstracts, bibliographies); economics, econometric, and financial analysis (data for modeling); and government. A number of companies have already developed applications that showcase the technology.

Strategic Information Corporation, of Burlington, Massachusetts, has developed a multiuser system comprising: two DataDrives, a Micro VAX, the Strategic Information Search Software (Data Visual Management System), several terminals, and the Haystack database. (Two DataDrives were necessary because the database takes up 2 gigabytes.) Haystack contains an index to government military specification data, standards, vendor catalogs, parts, and components.

From NCR/Micromedex Corporation, a multiuser system (built around a single DataDrive, an IBM Personal Computer (PC), an NCR PC, and the NCR 6650 Micro Modus intelligent input/output controller) provides fast access to a hospital database on poisons, toxicology, and pharmacology. The information in the database is already available as an on-line service, but when you bring it into a microcomputer system, you don't have data communications problems or expenses. In fact, this is the sort of application that makes you see how microcomputers can save lives. For instance, by working through a menu quickly, a doctor can call up a particular poison and check effects, therapies, and special dangers—even enter the known data about the victim (sex, weight, and approximate age). The doctor can then have the computer infer related data and display a nomograph showing the risks of particular combinations of drugs.

In another demonstration, an IBM PC was hooked up to a single DataDrive and a Metheus display system. This combination delivered individual images from a National Aeronautics and Space Administration/Jet Propulsion Laboratory (NASA/JPL) library. NASA commissioned the Laboratory for Atmospheric and Space Physics (LASP) to find a way to economically distribute the enormous data from interplanetary exploration missions. That data, claimed to be approximately 10^{15} bits per year and accumulated on magnetic tapes (some stored in a paint shed because there was nowhere else to put it), can now be sent out to those who can use it. Because the data consists of 1024- by 1024-pixel images, 1000 of them fit on a single disk (each pixel requires a single byte to specify color and intensity). The system allows close inspection (and temporary manipulation) of any part of the image. The distribu-

COMPANIES MENTIONED

APPLE COMPUTER INC.
20525 Mariani Ave.
Cupertino, CA 95014
(800) 538-9696
in Canada, (800) 268-7796 or
(800) 268-7637

COMPUTERIZED OFFICE SERVICES INC. (COSI)
313 North First Street
Ann Arbor, MI 48103
(313) 665-8778

INTEL CORP.
3065 Bowers Ave.
Santa Clara, CA 95051
(408) 987-8080

INTERNATIONAL THOMSON/ CARROLLTON PRESS
1611 North Kent Street, Suite 910
Arlington, VA 22209
(703) 525-5940

LASERDATA INC.
1 Kendall Square
Building 200
Cambridge, MA 02139
(617) 494-4900

LOGITECH INC.
805 Veterans Blvd.
Redwood City, CA 94063
(415) 365-9852
in Switzerland, (021) 77 45 45

METAPHOR COMPUTER SYSTEMS
2500 Garcia Ave.
Mountain View, CA 94043
(415) 961-3600

METARESEARCH INC.
1100 Southeast Woodward St.
Portland, OR 97202
(503) 232-1712

NCR/MICROMEDEX CORP.
1700 Patterson Blvd.
Dayton, OH 45479
(513) 445-2380, (513) 445-5000,
(800) 222-1235

REFERENCE TECHNOLOGY INC.
1832 North 55th Street
Boulder, CO 80301
(303) 449-4157

STRATEGIC INFORMATION CORP.
80 Blanchard Rd.
Burlington, MA 01803
(617) 273-5500

SUN MICROSYSTEMS INC.
2550 Garcia Ave.
Mountain View, CA 94043
(415) 960-1300

TEKTRONIX INC.
POB 500, Station Y3-314
Beaverton, OR 97077
(503) 643-7768
(800) 452-1877 or
(800) 547-1512

THINK TECHNOLOGIES INC.
420 Bedford St.
Lexington, MA 02173
(617) 863-5590

UNIFORM SOFTWARE SYSTEMS
201 Santa Monica Blvd.
Santa Monica, CA 90401
(213) 395-9674

tion, storage, and manipulation of images will plainly be revolutionized by such optical disk-storage systems.

An International Thomson/Carrollton Press demonstration showed the DataDrive searching through a library card catalog. Though the catalog was incomplete (covering only education and library-science classifications), the ability to search using keywords and Boolean operations was exciting. International Thomson/Carrollton Press will eventually offer the complete Library of Congress shelflist.

Reference Technology isn't the only company eyeing this market. LaserData Inc. of Cambridge, Massachusetts, is making an optical disk-drive controller that personal computer owners can use with commercially available optical disk drives (such as Hitachi and Pioneer). Actually, there are two controllers. The Trio-110, which has an embedded 80186, can control up to four disk drives or players, can work with up to four hosts, and costs $2950 (without the disk player). The PC-Trio is a card for the IBM PC and compatibles. It controls a single player, works with a single host, and costs $1365 (without the disk player). The disk players cost around $1000. The name "Trio" comes from the system's ability to work with video, data, or audio information. Either Trio version holds a mere 800 megabytes per disk but both are substantially slower than the Reference Technology system (an average access time of 1 second compared with the DataDrive's 151 milliseconds).

Another form of competition comes from the audio sector. Such manufacturers as Sony and Philips, who have been selling huge numbers of compact-disk players, which use smaller optical disks as a medium for digitized audio signals, are eyeing the data-storage market. Because of the economies of scale afforded them by success in the consumer market, they can experiment with computer applications. Most schemes see the 12-cm (4.68-inch) compact disk holding 550 megabytes and moving that data at 1.44 megabits per second with an average access time of 0.5 second. Reference Technology intends to include a compact-disk ROM in its own line within the next eighteen months. ■

Manufacturers such as Sony and Philips are eyeing the data-storage market.

CAD SYSTEM

2D Starting at $9,999.99
3D Also Available — CALL
All Plotters, Digitizers, Software and Training, one place for all your needs.

COMPUTERS

IBM PC 64K + DISC CONT CARD	$1299
IBM PC 256K 2½ HT DR	$1549
IBM PC 256K 2½ HT DR+ 10 MB	$2550
SANYO 550-1	$770
SANYO 555-2 (2) DS/DD+MON+8	$1299
IBM PC XT 256K	$3550
IBM PORTABLE	CALL
SANYO 555-2+COL.MON +5 SOFTWARE	$1559

SOFTWARE

SYMPHONY	$409
LOTUS 123	$285
dBASE II/III	$265/$398
WORD STAR PROPACK	$328
FRAMEWORK	$398
R BASE	CALL

MICROSOFT SOFTWARE AVAILABLE

MONITORS

QUIMAX COL	$475
QUIMAX COL	$469
PRINCTON GRAPHIC HX 12	$469
SANYO	$149
AMDEC 300	$149
PGS MAX 12	$195

DISKETTES

VERBATIM DS/DD	$25.85
VERBATIM SS/DD	$19.79
JANUS DS/DD	$25.00

PRINTERS SPECIALS

CABLE	$19
OKIDATA 92P	$375
OKIDATA 93P	$625
EPSON FX 100/80	VERY VERY LOW
BROTHER HR 15/HR25	$385/$598
BROTHER HR 35	$895
DTC STYLEWRITER 35K BUF	$499
DTZ 380Z + 48K BUFF	$933
EPSON LQ 1500	VERY VERY LOW

MODEM SALE

HAYES 1200 MODEM	$480
HAYES 1200B	$397

1200 BAUD Auto Dial, Auto Answer, Auto Log On, File Transfer, Printing, Call Progress Monitoring, Auto Baud Rate Selection. For IBM PC, XT Portable and Compatible. Made in Sunnyvale U.S.A. $249
Dealer inquiries welcome.

OVERSEAS ORDERS WELCOME:
TELEX:
855771 BEENAT

DISC DRIVES

EVEREX COGITO 10 MB INTL	$848
SIGMA 10 MB INTERNAL	$875
TEAC - ½ HT for IBM 360K	$129
SHUGART 455 for IBM 360k	$155
TANDON 100-2	$169
IBM DISC DRIVE	$199
CDC DRIVE for IBM	$195
TEC ½ HT for IBM 360K	$120

HARDWARE

PC PEACOCK	$229
HERCULES CARD	$313
64K RAM SET	$39
AST 6-PAC 64K	CALL
AST MEGA PLUS II 64K	CALL
KEY TRONIC KEYBOARD 5151	$199
TECMAR GRAPHICS	$485
EVEREX GRAPHICS	$450
OTHER HARDWARE	CALL
SIGMA MAXMISER	$244
8087 CHIP	$178
QUAD BOARD 10K	$225
PLANTONIC PLUS	$368

LEASING ARRANGED UP TO $1 MILLION AT LOW RATES, CAN INTRODUCE YOUR NEW PRODUCTS TO MARKETS. UPGRADE YOUR PRESENT COMPUTERS WITH 10MB PLUS HARD DRIVES. COMPANY P.O. WELCOME. MC/VISA + 3% CASH PRICES SUBJECT TO STOCK ON HAND. OPEN 7 DAYS.

ADVANCED COMPUTER SYSTEMS

665 GRAPE AVENUE
SUNNYVALE, CA 94087
408-732-6200

Inquiry 10

Dumb.



Stand-alone programs can't be made to work as a system no matter how hard you might try.

Stand-alone programs are fine. Unless, of course, you need them to work together. Because the sum of the parts will never equal a whole.

That's why even the highly touted WordStar,® dBase II™ and 1-2-3,™ programs don't make sense as a business system.

They were designed to perform very specific application functions only, and therefore, make miserable workmates.

Fortunately, there's a smart solution. It's the new Smart Software System.

Smart's unique "modular integration" is the key to productivity. It means that The Smart Word Processor, The Smart Data Manager

Smart.

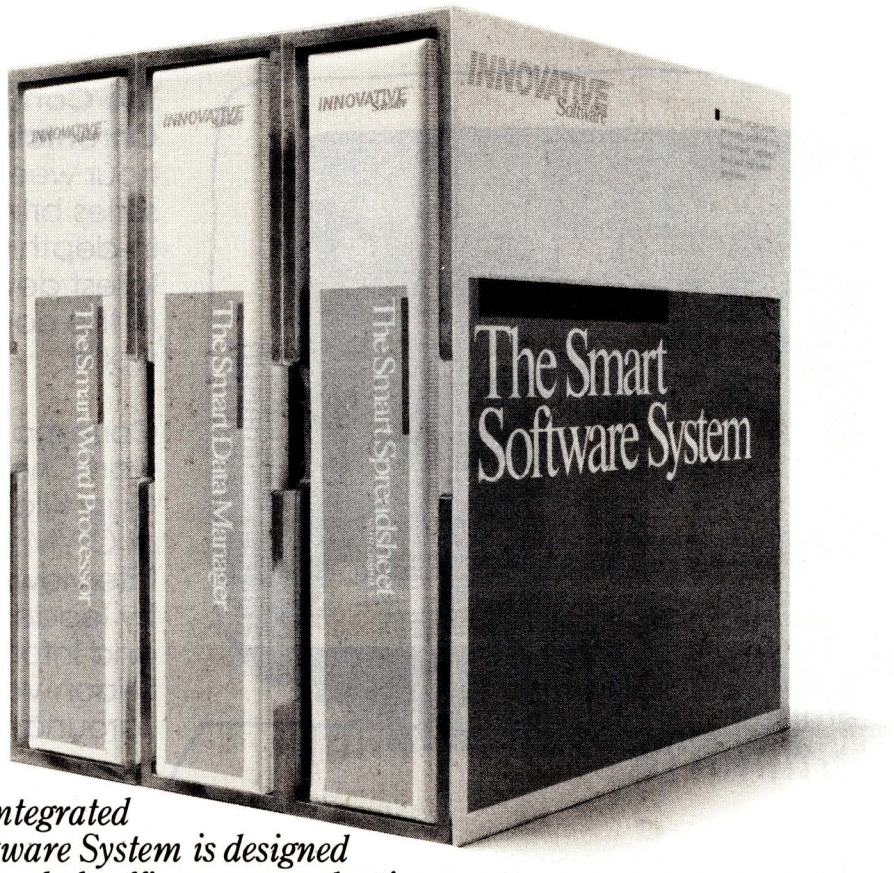

The fully integrated Smart Software System is designed to make the whole office more productive.

and The Smart Spreadsheet with Graphics not only have the uncompromising power and capacity of these leading stand-alone programs, but they also have the unprecedented capability to work brilliantly together.

So you can easily transfer data and pass commands from one to another. Which means that you can compile financial data, to be included in graph-form, within the text of a printed report, that's mailed to a list drawn from the data manager—automatically.

Don't short change your business by attempting to squeeze the impossible out of a makeshift software system. Get Smart, and the whole office will thank you.

Smart is available for the IBM PC, PC/XT, PC/AT, and compatibles. For information call, 800-GET-SMART. (In Kansas call, 913-383-1089).

Smart Software
from Innovative Software

*1-2-3™, WordStar® and dBase II™ are registered trademarks of Lotus Development Corporation, Micro Pro International Corporation and Ashton-Tate respectively. ©1984 Innovative Software, Inc.

A COMPUTER PROGRAM DELIVERED VIA SATELLITE!

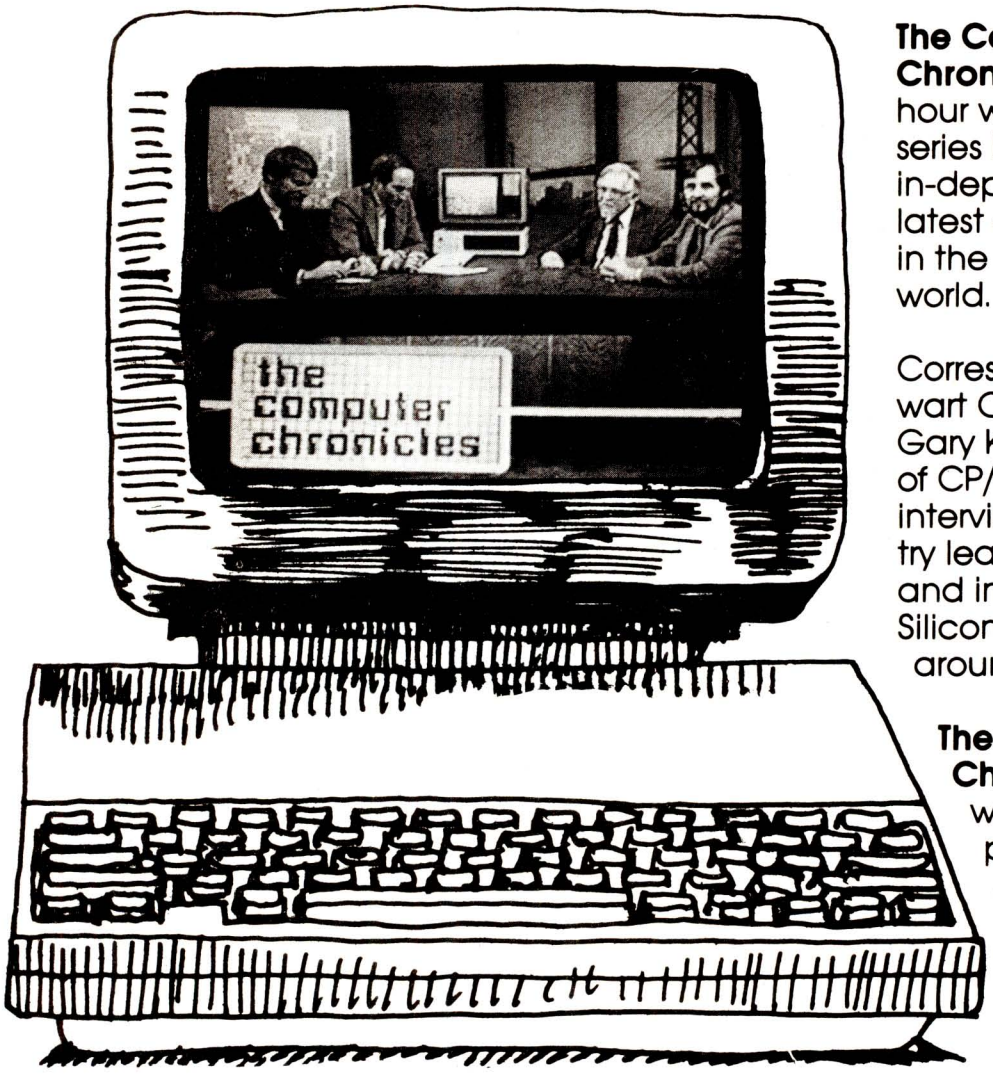

The Computer Chronicles, a half-hour weekly television series brings you an in-depth look at the latest developments in the computer world.

Correspondent Stewart Cheifet and Gary Kildall, creator of CP/M provide interviews with industry leaders plus news and information from Silicon Valley and around the world.

The Computer Chronicles, every week on a public television station near you.

(Check local listings for time and channel.)

Produced by KCSM, San Mateo, CA and WITF, Harrisburg, PA with funding from McGraw-Hill's BYTE and POPULAR COMPUTING magazines.



M·A·T·H·E·M·A·T·I·C·A·L R·E·C·R·E·A·T·I·O·N·S

The Fundamental Counting Principle

Counting without enumerating

BY MICHAEL W. ECKER

You are at a racetrack trying to pick the triple for a race featuring 10 horses. That is, to win you must predict which horses will come in first, second, and third place, with the specific order significant. How many possible triples do you have to choose from?

You wish to choose a fraternity name following the practice of using three Greek letters (e.g., Alpha Beta Alpha), where repetition of letters, as in the example, is allowed. The Greek alphabet has 24 letters. How many possibilities are there?

You want to count the number of divisors of 750. How can you do this without actually finding all the divisors first?

What is the smallest army that can be arranged in rows and columns of consistent sizes in exactly 16 different ways? (To illustrate, an "army" of 14 people could be arranged in four configurations: 1×14, 2×7, 7×2, and 14×1.)

These four ostensibly different problems can be handled without recourse to enumeration (meaning lengthy listing of all possibilities). The branch of mathematics dedicated to counting without enumerating is called combinatorics. The most basic theorem of combinatorics, known as the fundamental counting principle, can be stated this way: If a first thing can be done in m ways and a second thing in n ways, then the number of ways in which you could do both things (first one of the m followed by one of the n) is m times n, or mn.

As an example, suppose you wish to travel from A to B and then from B to C, as in figure 1 (without retracing any path or going in the wrong direction). Since you can go two ways from A to B and three ways from B to C, you have $2 \times 3 = 6$ ways to go from A to C. As a check by direct enumeration, suppose you call the A to B paths u and v, and the B to C paths w, x, and y. Then the possible paths from A to C are the six paths u-w, u-x, u-y, v-w, v-x, and v-y.

The fundamental counting principle is easily proven in general, but I think the enumeration of the possible paths in our example should be convincing (table 1). Note that since you are essentially counting with rows and columns, with all possibilities considered exactly once, the reason why you multiply is clear. This process extends to more than two things being done, as the solutions to the fraternity name question will show.

Since you have 24 choices for the first letter, 24 for the second, and 24 for the third, $24 \times 24 \times 24 = 13{,}824$ names are possible. If instead the requirements insisted on no repetition of letters, you would have 24 choices for the first letter, 23 for the second (because 1 of the 24 choices can no longer be used), and 22 for the third, thus $24 \times 23 \times 22 = 12{,}144$ possibilities. The number of names with at least two letters repeated is $13{,}824 - 12{,}144 = 1680$ names.

Applied to the horse race, where order matters, you could play $10 \times 9 \times 8 = 720$ possible triples. You can now understand why the racetrack can afford to give such luxurious odds. Similarly, you could apply this principle to counting possible numbers of license plates, ways to line up people, etc. In any case, you can appreciate that the numbers in question begin to get large.

FACTORIALS

Combinatorics makes extensive use of factorials. Recall that the factorial of a positive integer n is written "$n!$" and read as "n factorial." The product is found by multiplying n by $n-1$ by $n-2$ . . . and so on down to 1. For instance, $5! = 5 \times 4 \times 3 \times 2 \times 1 = 120$. Before continuing, you may want to write a BASIC program to compute factorials of small positive integers. You might be able to produce a more useful one than mine, which simply implements the definition and quickly gets into accuracy and precision questions for larger values (listing 1). For technical reasons, 0! is defined to be 1, much as a zeroth power (of a nonzero number) is defined to be 1. (The primary

(continued)

Dr. Michael W. Ecker (c/o BYTE, POB 372, Hancock, NH 03449) is an associate professor in the Department of Mathematics and Computer Science at the University of Scranton, Pennsylvania.

The number of possible orderings or arrangements of n distinct objects is n factorial.

reason for 0! equaling 1 is so that the formula for combinations $C(n,k)$—arrangements where order is not significant—will be valid even if $k = 0$ or n.)

The connection of factorials to the fundamental counting principle is that the number of possible orderings or arrangements of n distinct objects is $n!$. Thus, four people can line up in 4! = 24 orders; the 10 horses in the race can finish (assuming all finish) in 10! = 3,628,800 different orders.

Armies and Prisoners

Let's now see what consequences can be derived from all this. Consider the question of how many divisors a given integer has. You probably know that a prime number is a positive integer greater than 1 whose only divisors are 1 and itself. To say that more elegantly, a prime is a natural number that has precisely two divisors. Now take 750. You could enumerate all its divisors, but you don't want to. Instead, think about the following idea. The number 750 is uniquely expressible, apart from order, as $2 \times 3 \times 5 \times 5 \times 5$ or $2 \times 3 \times 5^3$ when delineated as a product of prime numbers.

For a number to be a divisor of 750, it cannot contain any prime that 750 doesn't contain, nor to a higher power. In other words, a typical divisor of 750 has to look like 2 to the power 0 or 1; times 3 to the power 0 or 1; times 5 to the power 0, 1, 2, or 3. Since two choices for the first power are possible, two for the second, and four for the third, there are $2 \times 2 \times 4 = 16$ divisors. In general, if you have prime factorization p to the a, times q to the b, etc., then the number of divisors is $(a + 1)$ times $(b + 1)$ times etc., coming from $a + 1$ choices for power on p, then $b + 1$ for power on q, and so on. The reason you have power + 1 choices for each prime's power is that 0 as a power is an extra choice. You might try writing your own program to calculate the number of divisors of any number. Then compare your version to mine (listing 2).

Factoring and the army problem have a strong similarity since a single configuration of an army corresponds precisely to one means of factoring into two factors, with order mattering. Specifically, a factoring into $j \times k$ corresponds to a divisor j. On the other hand, $k \times j$ corresponds to the other paired divisor k. All this is to say that each configuration corresponds precisely to a choice for the first factor, that is, the first divisor. Hence, the number of configurations equals the number of divisors. As such, since you know the number 750 has 16 divisors, the solution to the army problem is at most 750. Modifying the previous program to finish this should not be too difficult, although it can be done without a computer as well. (For the same problem applied to 64 divisors with a purely mathematical solution, see my article "Some Recreational Applications of Elementary Number Theory," *The Pentagon*, Spring 1982.

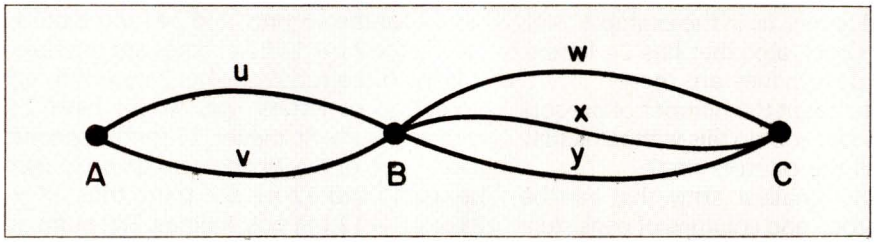

Figure 1: *The two- by three-pathway map.*

Table 1: *The possible paths through figure 1 without backtracking.*

	w	*x*	*y*
u	*u* – *w*	*u* – *x*	*u* – *y*
v	*v* – *w*	*v* – *x*	*v* – *y*

Listing 1: A *program to generate factorials through* 33!.

```
10    REM ROUTINE TO COMPUTE FACTORIALS TO 33!, THE LARGEST
      FACTORIAL THAT MICROSOFT BASIC CAN HANDLE IN THIS WAY.
20  CLS
30  DEFDBL F
40  DIM FACTORIAL(33)
50  FACTORIAL(0) = 1        'DEFINE 0! TO BE 1.
60            REM COMPUTE FACTORIALS
70  FOR I = 1 TO 33
80          FACTORIAL(I) = I*FACTORIAL(I - 1)
90  NEXT
100           REM PRINT RESULTS
110 FOR I = 0 TO 32 STEP 2
120       PRINT I;"! =";FACTORIAL(I);TAB(40);I + 1;"! =";FACTORIAL(I + 1)
130 NEXT
140 END
```

Still another use of this result from the fundamental counting principle is the following alternate explanation of the jailer problem (Mathematical Recreations, November 1984 BYTE, page 425). In that problem, the prisoners in cells that are open at the end of a certain process to determine a partial amnesty—based on locking and unlocking cell doors—were set free. It turned out that release required, as a necessary and sufficient condition, that the cell number have an odd number of divisors. I showed this condition to be equivalent to the cell number being a perfect square. I will now show a different reason why a number with an odd number of divisors is necessarily a perfect square (and conversely).

If the cell number N is factored as

$$N = p_1^{a_1} p_2^{a_2} \ldots p_j^{a_j}$$

then the number of divisors it has is $(a_1 + 1)(a_2 + 1) \ldots (a_j + 1)$. In order for an integer to be odd, all its factors must be odd, and conversely. Hence, all of $a_1 + 1$, $a_2 + 1$, etc., are odd. But then all of $a_1, a_2, \ldots a_j$ are even. Write $a_1 = 2b_1$, $a_2 = 2b_2$, etc. By virtue of the identity

$$N = p_1^{a_1} p_2^{a_2} \ldots p_j^{a_j} = p_1^{2b_1} p_2^{2b_2} \ldots p_j^{2b_j} = (p_1^{b_1} p_2^{b_2} \ldots p_j^{b_j})^2$$

N is forced to be a perfect square.

LAGNIAPPE

With all the attention mathematicians pay to perfect squares, it might come as a bit of a surprise that there is a formula for producing nonsquares, only nonsquares, in order and without repetition. I will skip discussion or proof of the formula and just give you the program (listing 3).

The key is the formula for the kth nonsquare given in line 30. The result is stored as A. Since the program has an infinite loop, hit your computer's Break key or equivalent when you've seen enough. I have avoided arrays so as not to limit how high you go.

COMBINATIONS

I've digressed a bit from the original topic, so let's get back to counting.

(continued)

Listing 2: *A program to count the number of divisors of a number without enumerating the choices.*

```
10  '*****************************************************************
20  '*                                                               *
30  '*   PROGRAM TO FACTOR A NUMBER INTO PRODUCTS OF PRIMES          *
40  '*                                                               *
50  '*****************************************************************
60  CLS
70  DEFINT A-Z
80  INPUT "Enter largest number to be factored";NUMBER
90  IF NUMBER<2 THEN PRINT "NUMBER MUST BE LARGER THAN 1":GOTO 80
100 REM FIRST, FIND THE NECESSARY PRIMES. FLAG.ARRAY WILL FLAG
        NONPRIME (COMPOSITE) NUMBERS, PRIME ARRAY WILL HOLD
        PRIMES WHEN FOUND. SOME BASICS REQUIRE SHORTER
        VARIABLE NAMES.
110 REM SIEVE ALGORITHM PROVIDED BY WILLIAM F. DOSSETT OF AUSTIN, TX.
120 DIM FLAG.ARRAY(NUMBER),PRIME(NUMBER)
130 COMPOSITE = -1                          'NONPRIME FLAG.ARRAY ELE-
                                            MENT WILL BE GIVEN
                                            TRUTH-VALUE 'T'
140 INDEX = 1                               'SUBSCRIPT OF LARGEST
                                            NONEMPTY ENTRY IN PRIME
                                            ARRAY
150 PRIME(INDEX) = 2                        'DECLARE 2 PRIME AND
                                            LIMIT PRIME SEARCH TO
                                            ODD NUMBERS
160 REM AVOID UNNECESSARY DUPLICATION IN SEARCH. FIRST NONPRIME ODD
        NUMBER IS 9 (3 SQUARED), FIRST COMPOSITE ODD NUMBER NOT
        DIVISIBLE BY 3 IS 25 (5 SQUARED), ETC.
170 FOR K = 3 TO SQR(NUMBER) STEP 2
180     IF FLAG.ARRAY(K) THEN 220           'SKIP TO NEXT PRIME
190     FOR I = K*K TO NUMBER STEP K+K      'FLAG THE ODD NUMBERS IT
                                            DIVIDES
200             FLAG.ARRAY(I) = COMPOSITE
210     NEXT
220 NEXT
230 INPUT "Do you want a listing of the primes found (y/n)";PRIMEPRINT$
240 IF PRIMEPRINT$ = "y" THEN PRIMEPRINT$ = "Y"
250         REM COPY ALL PRIMES FOUND TO PRIME ARRAY, PRINT
                PRIMES IF SO REQUESTED IN 230.
260 FOR I = 3 TO NUMBER STEP 2
270     IF NOT FLAG.ARRAY(I) THEN INDEX = INDEX + 1:PRIME(INDEX) = I:
                                  IF PRIMEPRINT$ = "Y" THEN
                                                PRINT PRIME(INDEX);
280 NEXT
290 PRINT:PRINT
300 PRIME(INDEX + 1) = NUMBER + 1           'MARK END OF PRIME ARRAY
                                            IN CASE NUMBER IS PRIME
310 MAXNUMBER = NUMBER                      'SAVE VALUE OF LARGEST
                                            NUMBER GUARANTEED FAC-
                                            TORABLE WITH CURRENT
                                            PRIMES LIST
320 DIVISORS = 1                            'INITIALIZE NUMBER OF
                                            DIVISORS COUNTER
330 SUBSCRIPT = 1                           'ACTIVE ELEMENT OF PRIME
                                            ARRAY
340 PRIME = PRIME(SUBSCRIPT)
350         REM PRINT UNIQUE FACTORING OF NUMBER
360 PRINT NUMBER;" CAN BE UNIQUELY FACTORED AS:"
```

```
370          REM IF YOUR BASIC DOES NOT SUPPORT 'WHILE...WEND',
                 CHANGE LINE 380 TO: IF PRIME>NUMBER THEN 480.
380 WHILE PRIME<=NUMBER
390          REM WHAT POWER OF THE ACTIVE PRIME IS A FACTOR OF THE
                 NUMBER?
                 NOTE THAT, ALTHOUGH ALL VARIABLES HAVE BEEN DE-
                 CLARED INTEGER, NUMBER/PRIME NEED NOT HAVE AN
                 INTEGER VALUE.
400       IF NUMBER/PRIME=INT(NUMBER/PRIME) THEN
                 EXPONENT=EXPONENT+1:
                 NUMBER=NUMBER/PRIME:GOTO 400
410          REM PRINT THE RUNNING RESULTS, INCREMENT DIVISORS
420       IF EXPONENT>0 THEN PRINT "("; PRIME;"TO THE";EXPONENT;")";:
                                 DIVISORS=DIVISORS*(EXPONENT+1)
430          REM RESET POWER COUNTER, LOOP
440       EXPONENT=0
450       SUBSCRIPT=SUBSCRIPT+1:PRIME=PRIME(SUBSCRIPT)
460 WEND
470          REM IF YOUR BASIC DOES NOT SUPPORT 'WHILE...WEND',
                 CHANGE LINE 460 TO: GOTO 380
480 PRINT:PRINT "NUMBER OF DIVISORS=";DIVISORS
490 PRINT:PRINT
500          REM IF MORE NUMBERS ARE TO BE FACTORED, DETERMINE
                 WHETHER THE CURRENT PRIMES LIST IS ADEQUATE. IF
                 SO, USE IT. IF NOT, ERASE ARRAYS TO AVOID PROGRAM
                 CRASH AND RECALCULATE PRIMES.
510 INPUT "Do you want to factor another number (y/n)"; CHOICE$
520 IF CHOICE$<>"y" AND CHOICE$<>"Y" THEN 560
530 CLS
540 INPUT "Enter the new number to be factored";NUMBER
550 IF NUMBER<=MAXNUMBER THEN 320 ELSE
    ERASE FLAG.ARRAY,PRIME:GOTO 120
560 END
```

Listing 3: *A program to generate nonsquare numbers.*

```
10    REM ROUTINE TO GENERATE NONSQUARE NATURAL NUMBERS.
          PROGRAM CREATES AN INFINITE LOOP. HIT THE BREAK KEY
             TO TERMINATE.
20 CLS
30 COUNTER=1
40 NONSQUARE=INT (COUNTER+SQR(COUNTER)+.5)
50        PRINT "Nonsquare number"; COUNTER;" is";NONSQUARE
60        COUNTER=COUNTER+1
70 GOTO 40
```

Suppose you have a situation in which you have choices where the order doesn't matter. To dramatize the distinction, consider the following two questions:

1. From 10 people, a president, vice-president, and secretary are to be chosen. How many slates of candidates are possible?

2. From 10 people, a clean-up committee of 3 people is to be formed. How many such committees are possible?

The distinction is this: In the first situation, order is significant. *A, B, C* is not the same as *B, C, A* since it is of interest not just which three people are chosen but which holds which office. In the second case, order is not relevant. From these considerations, you discover that the fundamental counting principle applies to the first situation but not to the second. The number of possible slates for candidates is $10 \times 9 \times 8 = 720$.

A number with an odd number of divisors is necessarily a perfect square.

The solution to question 1 can assist you in handling question 2. For each clean-up committee (*A, B, C*) chosen, there are $3! = 6$ possible slates, namely *A, B, C*; *A, C, B*; *B, A, C*; *B, C, A*; *C, A, B*; and *C, B, A*. In other words, there are six (3!) times as many slates as clean-up committees, or the number of clean-up committees is one-sixth the number of slates; in this case, $720/6 = 120$. More generally, let $C(n,k)$ represent the number of ways to choose k different things from n without regard for the order of choice. If order mattered, you would have $n \times (n-1) \times (n-2) \times \ldots \times (n-k+1)$ possibilities. But because each choice of k things has been counted $k!$ times, this answer is $k!$ times too large. If you now divide by $k!$, you will have a representation for $C(n,k)$. However, you customarily multiply top and bottom by $(n-k)!$ to tidy up the numerator so that it contains only a factorial. Then $C(n,k) = n!/(k!(n-k)!)$.

As a quick example, how many choices do you have if you wish to pick 3 distinct flavors from a choice of 31 flavors? Since the order of choice is irrelevant, there are $C(31,3) = 31!/(3!28!)$ choices. In practice, you would not compute 31! first, but rather would simplify first—$31 \times 30 \times 29/6 = 4495$.

After the foregoing, you should find it easy to write a program to calculate combinations. ■

バイト

B·Y·T·E J·A·P·A·N

The New and the Old

Denser Chips
NEC PC-8401A
Casio LCS-2400
Fujitsu FM-11BS
Piracy

BY WILLIAM M. RAIKE

I have just spent the last two weeks exploring the quirks and idiosyncrasies of my new Fujitsu FM-11BS, my first 16-bit machine, and I happily admit that I'm delighted with it. I'll say more about it later in this column. Meanwhile, there's news about integrated circuits (ICs), a report from my own source about a new hand-held computer from NEC, an announcement of a new printer from Casio, and some comments about the burgeoning market in pirated software in Taiwan.

MITSUBISHI'S TINY TRANSISTORS

It seems as if every week there's an announcement of some "revolutionary breakthrough" in IC technology that makes the previous week's revolutionary breakthrough seem old. My candidate for this week's mind-blowing achievement award is Mitsubishi Electric. They have just announced the development of what they call "submicron-wafer processing technology," which can produce the types of thin wafer-like plates from which the next generation of extremely large-scale memory chips will be manufactured. Mitsubishi produced sample wafers that contain transistors small enough to build 4-megabit (half-million character) dynamic RAM (random-access read/write memory) chips.

The newest generation of memory chips is the 256K-bit chip; the impact of these ICs, which can hold over 32K bytes each, is just starting to be felt by designers who can now put 246K bytes of memory in the same circuit-board area that previously held only 64K bytes. In order to cram enough microscopic transistors into the space of a single chip to hold that volume of data, the photographically produced lines on the chip can be only a few microns wide. (A micron is one-millionth of a meter.) For a 4-megabit RAM chip, the lines need to be almost an order of magnitude slimmer. Mitsubishi succeeded in making transistors with lines only 0.4 micron wide. For comparison, the wavelength of violet light is only about 0.45 micron.

It's too soon to predict who will be first into the marketplace with a 4-megabit RAM (or a 1-megabit RAM, for that matter), but this development means that technology that would have been considered esoteric even for research labs only a few years ago is coming closer to the production line.

NEW NEC HAND-HELD COMPUTER

Last month's BYTE Japan talked about the new hand-held computers from Epson and the 68000-based, APL-oriented machine that Ampere Corporation will be introducing soon. This month we bring you a peek at the recently released NEC portable, the PC-8401A. (See What's New, December 1984 BYTE, page 39.) It is a substantial upgrade of the handy little PC-8201 and is clearly intended to compete with the machines already being marketed in the U.S. by Hewlett-Packard, Epson, and others.

The PC-8401A will be based on NEC's CMOS (complementary metal-oxide semiconductor) version of the Z80 processor; the operating system will be a version of CP/M in ROM (read-only memory). The machine will have a liquid-crystal display (LCD) with 16 lines of 80 characters each (128 by 480 dots) and will include both a Centronics-type printer interface and an RS-232C interface as standard equipment. It will be supplied with 64K bytes of RAM, plus at least 96K bytes of ROM to hold the standard software supplied with the computer, which will include portable WordStar, spreadsheet and filing programs, and a telecommunications program.

The telecommunications program will support the built-in 300-bps (bits per second) auto-dial modem, including a feature that will select telephone numbers from a telephone-directory file and will be able to upload and download files either with or without the popular XMODEM protocol. You'll be able to store frequently used log-on procedures in files and to check the names of all current files at any time using

(continued)

William M. Raike, who holds a Ph.D. in applied mathematics from Northwestern University, has taught operations research and computer science in Austin, Texas, and Monterey, California. He holds a patent on a voice scrambler and was formerly an officer of Cryptext Corporation in the United States. In 1980, he went to Japan looking for 64K-bit RAMs. He has been there ever since as a technical translator and a software developer.

The PC-8401A sounds like a powerful, usable machine, if not as dramatic as some others.

an on-the-fly directory command.

Two CP/M modes will be available: 32K-byte mode and 64K-byte mode. In 32K mode, half of the built-in 64K RAM will be used as a RAM disk for rapid-access file storage. In 64K mode, the transient program area available for application programs will be a full 60K bytes, but in that case either an optional 320K-byte microfloppy disk unit or a 32K-byte RAM cartridge will have to be connected in order to provide external file storage. Other options said to be available will include 32K-byte ROM cartridges for user programs, a 1200-bps modem, and an expansion unit containing a standard CRT (cathode-ray tube) interface and a floppy-disk interface. Another option that sounds interesting is a ROM cartridge with a built-in spelling-checker dictionary.

All in all, the PC-8401A sounds like a powerful, usable machine, even if it's not as dramatic as some of the other current (and prospective) offerings.

New Casio Printer

In a future column, I'll survey some of the printers available here in Japan for use with personal and office-type computers ("pasocom" and "ofcon"). Meanwhile, the latest high-tech entry is the new LCS-2400, just announced by Casio; first shipments are expected in the second quarter of 1985. It's billed as a desktop machine, even though it weighs over 70 pounds. It uses the same printing method used in electrostatic copying machines. There's no moving print head at all; instead, the characters are transferred to the photoconductive surface through a liquid-crystal shutter, which should produce very clear characters. The LCS-2400 can print nine standard-size pages per minute, with a resolution of 240 dots per inch.

The Japanese price will be equivalent to about $1650.

Happiness Is a New Computer

I had a number of reasons for looking for a new computer, besides the slow screen functions on my NEC PC-8801. I finally settled on the Fujitsu FM-11BS. It uses separate microprocessors as display and keyboard handlers to reduce the load on the main processor, which is an 8088 type that runs at 8 MHz.

First, I wanted to be able to run and evaluate contemporary 16-bit software. The FM-11 can run either Digital Research's CP/M-86 or Microsoft's MS-DOS operating system, although the machine is supplied with Fujitsu's version of Kanji CP/M-86, which supports a large Japanese-language character set. It's also supplied with a fairly elaborate dialect of BASIC, plus a Japanese-language word processor called JWORD. The last few weeks have been so busy, though, that I haven't even had time to take the JWORD disk out of its envelope. I also have a Z80 card on order, so I'll be able to run a considerable amount of my existing 8-bit software.

Another reason for selecting the Fujitsu machine was that I'm completely sold on RAM disks. The FM-11 is supplied with 256K bytes of RAM and is expandable to 1 megabyte (MB); I've ordered an additional 256K-byte memory board (for about $300). With jumpers on that board to accommodate 256K-bit RAM chips, I should have my megabyte in less than a month. I can use up to 512K bytes of the available memory as a RAM disk under Fujitsu's version of Kanji CP/M-86. WordStar works with blinding speed when it is located in the RAM disk along with its overlay and message files. When the new memory board arrives, I'll be able to load all the C compiler, linker, and library files into a 512K-byte RAM disk and really sizzle.

Finally, I had gotten tired of disk swapping. With my old 320K-byte drives, I had a text editor on one disk, the compiler, assembler, and debugger on another, and source library and archives on a third. In addition to the time it took to switch disks and/or copy files, there was always the problem of remembering just what files were in which drive at any given time. That's the kind of thing computers are supposed to keep track of. The FM-11 has dual 1-MB 5¼-inch disk drives (with the same track and sector format as 8-inch floppy disks); the large capacity saves me considerable time during the edit-compile-debug cycle. And it's delightful to be able to simply assume that everything I'm currently working on is in drive A (or in drive M, which is the RAM disk). The next logical step is Fujitsu's 10- or 20-MB hard disk, but at the moment that looks postponable.

Software conversion has been fairly hassle-free. It was simple to download my C-language source files directly, with the machines side by side, through the RS-232C ports. I'm running Digital Research's C compiler, and converting my Software Toolworks C/80 source programs for use on the Fujitsu required only modest effort. In a few cases the conversion turned out to be a pain in the neck, due largely to Digital Research's baroque approach to documentation and software "features." For instance, as far as I can tell, CP/M-86 retains such quirks from CP/M-80 as converting the command line to uppercase letters but no longer copies the full command-line tail (containing options, parameters, etc.) into a buffer for use by application programs. That made it tricky to convert the command-line batch submission utility I presented in the November 1984 BYTE Japan (page 401), which does its own parsing of the command line. I finally settled on the kludge of picking up the entire command line out of the CCP's (console command processor) own buffer.

I'm as anxious to try out new software as the next person, but not at the price of encouraging piracy.

Another problem arose when I tried to convert the CDIR do-it-yourself directory program presented in the August 1984 column (page 339). Digital Research's C compiler has a "feature" that automatically treats asterisks or question marks in the command line as CP/M wild-card file specifications and expands them on the spot before passing them to the main C routine via the argc and argv parameters. The expansion apparently cannot be disabled, and evidently it never occurred to Digital Research that there might be cases where it would be undesirable. Still worse, if there are no files that match the wild-card specification, the run-time module prints a gratuitous "No Match" message to that effect on the console, whether you want it or not.

Still another feature is that there are 27 different compiler options that you can specify on the command line, but there's no way to change the default values of the options (such as locations of standard files, the levels of message and error output you want, etc.). My C/80 compiler, which costs about one-fifth the price, comes with a configuration program that lets you change the compiler's default options.

Piracy

A friend of mine returned recently from a week-long business trip to Taipei. I hadn't been there in nearly three years and was anxious to learn whether the people were still as kind, the food as delicious, and the city as busy as I remembered. The answer to all three questions was "yes," but an active new industry seems to have emerged: software piracy. Years ago, Taipei was notorious as a source of unauthorized (pirated) copies of books, especially English-language technical and reference books. Bowing to international pressure, the government gradually made it more difficult for the pirates to operate, and in recent years the production of pirated books has been reduced to a bare trickle. But with the worldwide microcomputer explosion, a whole new fertile field has presented itself, and the enterprising citizens in Taipei have been copying floppy disks even faster than they used to run their printing presses.

Literally dozens of computer shops have sprung up near Pateh Road and all offer lists of hundreds of well-known U.S.-produced software packages, usually in either IBM PC or Apple disk formats, for $10 to $12 each. Now it may simply be my suspicious nature, but I doubt that those shops could buy legitimate copies of Lotus 1-2-3, dBASE II, or WordStar and make a profit by selling them for $10.

I'm as anxious to try out new software as the next person but not at the price of encouraging piracy. The U.S. Customs Service, quite properly, takes a very dim view of trying to bring bootleg software back into the United States, but total control is impossible, and the potential market outside the U.S. is very large. If carried to extremes, software piracy will only make it unprofitable, and therefore impossible, for high-quality software to be produced and marketed.

Copy protection is not the answer; Jerry Pournelle's Chaos Manor column has given plenty of reasons why that approach is both unreasonable and impractical. In the end, the solution to software piracy is probably the same solution that works for any kind of piracy: apply enough pressure to discourage the countries that harbor pirates from giving them the shelter they need.

Next Month

In the Feburary BYTE Japan I'll report on some interesting optical disks and laser printers I saw at the 1984 Data Show in Harumi. I'll also discuss the Toshiba MS-X computer and some other tidbits. ■

ULTRA-RES™ GRAPHICS

Available from stock

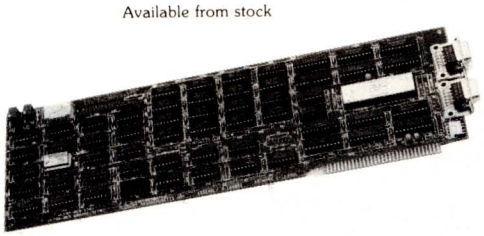

Advanced feature display controllers for IBM-PC / XT and compatible systems. Features include NEC7220, programmable resolution to 1024X1024, slave controllers, transparent mode allows monochrome adapter and ULTRA-RES on same monitor, DMA compatible, light pen, externally powerable. Monitor protection circuits. Video outputs are TTL direct drive or analog. Software drivers.

WHEN RESOLUTION COUNTS

C.S.D. Incorporated
P.O. Box 253 SUDBURY, MA 01776

(617) 443-2750

ULTRA-RES Trademark CSD Inc
IBM-PC Trademark IBM

Prices from $995

ULTRA-RES,
a family of graphic controllers for IBM-PC / XT and S-100 systems

Inquiry 47

Call Oryx and order by phone ...without a single hang-up!

IBM/PC SOFTWARE

Alpha Software
Data Base Mgr II $179

Arrays, Inc.
Home Acct. + ... $ 95
Home Acct. w/ Tax Advntg..... $139

Central Point
Copy II PC..... $34

CompuView
Vedit $130
Vedit + ... 179
VPrint 65

Connecticut Software
Printer Boss w/ Letter Boss..... $ 79
Above w/ Side Kick... 119

Creative Software
Creative Filer ..... $ 39
Creative Calc..... 39
Creative Writer 39
Creative Bundle Box (Filer, Calc, Writer).... 109

Digital Research..... Call

Dow Jones
Market Analyzer..... $229
Market Manager..... 189
Spreadsheet Link..... 179

Ecosoft, Inc.
Microstat..... $259

Electronic Arts
Get Organized..... $159

Enertronics
Energraphics $259
w/ Plotter Option..... 299

Fastware Thor (the thought organizer.... $245

Financier, Inc.
Financier II $119

Fox & Geller
Grafox $189
RGraph (for R-base 4000)..... $175

FYI
Superfile $149
FYI 3000..... 287
Sort Facility 99

Harvard Software
Project Manager..... $249

Hayes
Please..... Call

Lifetree
Volkswriter Deluxe..... $179
Volkswriter Scientific.. 359

Living Videotext
Think Tank (256K)..... $139

MDBS
Knowledge Man $299

Menlo Corp.
In Search..... $299

Micropro
Wordstar ProPak (WS, CS, MM,SI)..... $299
Wordstar 199
Professional Options Pak $129
ProPak Plus (WS, CS, MM, SI, TM)..... $399
TeleMerge 109

Microrim
R-base 4000..... $279
R-base Clout 169
R-Writer..... 119
Prog Interface 259

Microsoft
Flight Simulator II..... $ 39
Project 1.01..... 199
C Comp..... 309
Basic Comp 249
Word 1.15..... 229
MuMath/MuSimp 199
(All Microsoft products provided in MS DOS.)

Morgan Computing
Prof Basic..... $799
Trace 86..... 99
Pathfinder..... 59

Multimate ..... Call

Northwest Analytical
Statpak..... $365

Peter Norton Computing
Norton Utilities..... $ 55

Peachtree
PeachText 5000..... $249
Series 8 Accounting Modules $389

Samna Corp.
Samna Word + ... $229
Samna Word II..... 369
Samna Word III..... 439

Satellite Software
Word Perfect w/ Sp... $255

Software Arts
Spotlight $109

Software Publishing
PFS: File, Graph Write.....ea $ 89
PFS: Plan..... 89
PFS: Report..... 79
PFS: Access, Proof 69

Sorcim
Supercalc III..... $249

Star Software Systems
Acct'g Partner $229
Acct'g Partner II..... 659

Supersoft
C Compiler - 8086 .... $350

Wang Software
Grammatik..... $ 60
Proofreader..... 42

Warner Software
Desk Organizer..... $219

Westminster Software
Pertmaster..... Call

...and many more!

APPLE SOFTWARE

Alpha Software
Apple-IBM Connection $169
Typefaces..... 69

Arrays, Inc.
Home Acct. ..... $ 59
FCM 79

BPI..... Call

Broderbund
Bank Street Writer .... $ 45
Bank Street Speller.... 45
Others..... Call

Cdex
All Trng Prog's.....ea $ 49

Central Point
Copy II + ... $ 34

Digital Research ..... Call

Dow Jones
Market Analyzer..... $229
Market Manager..... 189
Spreadsheet Link..... 179

Eduware..... Call

Living Videotext
Think Tank..... $ 99

Micropro
Pro Pak (WS, SS, MM, SI) $349

Microsoft ..... Call

Peachtree
Back to Basics $149
PeachPak Series 40 or 80..... $239

Penguin Software ... Call

Sierra
Frogger ..... $ 25

Software Publishing
PFS: File, Graph, Report.....ea $ 79

Spinnaker ..... Call

Xerox Education
Sticky Bear Series..ea $ 35

dBASE II CORNER

Anderson-Bell
Abstat..... $289

Ashton-Tate
dBase II..... Call
dBase III..... Call
Framework..... Call
Friday..... Call

Fox & Geller
dGraph..... $169
Quick Code..... 169
dUtil..... 58

Human Soft
DBPlus..... $ 90

Sensible Designs
dProgrammer $199

CP/M SOFTWARE

All prices below are for 8" standard.

ATI
All Trng Prog's.....ea $ 52

CompuView
V-Edit 8080..... $130
V-Edit CP/M 86..... 130

Digital Research
Pascal MT+ w/ SPP ... $389
DR Assembler & Tools 149
CP/M 2.2..... 125
C Basic..... 115
PL/I-80..... 375
Personal Basic 120
CP/M Gold Card..... Call
Access or Display Mgr..... $299
C Lang/compiler..... 260
All 8" - 86 Version of Above ..... Call

Infocom
Deadline..... $ 49
Starcross..... 39
Suspended..... 39
Zork, I, II, III .....ea 39

Micro Pro
WordStar..... $250
InfoStar..... 265
Pro-Pak (WS, MM, SI, SS)..... $359
All Others ..... Call

Microsoft ..... Call

Microstuf
Crosstalk..... $109

Northwest Analytical
Statpak..... $365

Oasis
Word Plus $120
Punctuation & Style.... 99

Supersoft
Disk Doctor ..... $ 74
Scratchpad Plus..... 129

MACINTOSH CORNER

SOFTWARE

ATI
MacCoach .....$ 60

Dow Jones
Straightalk 59

Human Edge
Sales Edge $195
Mgmt Edge 195

Intermatrix
MacPhone..... $159

Living Videotext
Think Tank..... $119

Main St. Software
Main St. Filer..... $225

Microsoft
MacBasic V 1.01 .... $ 99
MacChart 85
MacWord..... 139
MacFile..... 139

Monogram
Dollars & Sense..... $139

Software Publishing
PFS: File,Report . ea $ 89

T/Maker
Click Art..... $ 39

Telos Software
Filevision..... $109

Games
Hayden, Infocom Penguin, Mirage Concepts, Sierra, and more ..... Call

HARDWARE

Davong
Disk Drives..... Call

Kensington Microware
Swivel ..... $ 29
Surge Supressor..... 45
Modem $399

Memorex
3½" Diskettes..... $ 49

Tecmar
Disk Drives..... Call

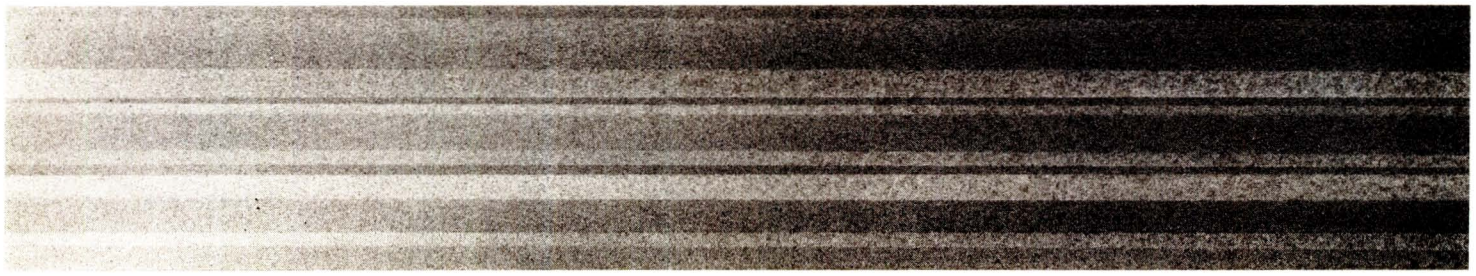

APPLE/ FRANKLIN BOARDS

ALS
CP/M Card $269
Smarterm II..... 119
Z-Engine 139

CCS 7711
Asynch Serial..... $ 99

Microsoft
16K Ramcard ..... $ 69
Softcard..... 249
Softcard +..... 449
Prem Softcard (IIE)..... 335

Microtek
Printer I/F..... $ 75
Dumpling-16K 169
Dumpling-GX..... 89

Mountain
A-D/D-A..... Call
Music System..... $349

Orange Micro
Grappler + w/ buffer. $175

Prometheus
Versacard..... $159

Video-7, Inc.
V-Color RGB cards .... Call

Videx
Videoterm VT-602..... $249
Ultraterm 249

IBM/PC BOARDS

AST Research
Six Pak + 64K
(exp 384K, S/P, Clk).. $279
MegaPlus 64K, (CI/Cal,
S Port, 512K cap
w/ Megapak)..... $279
Extra ports available
for Megaplus and
I/O Plus II (Game,
P or S)..... $ 40
Megapak 256K up-
grade for Megaplus. Call
I/O Plus II CI/Cal
and S Port..... $139

Maynard Electronics
Floppy Drive Cntrlr.... $139
w/ Par Port..... 169
w/ Ser Port..... 179
Sandstar ..... Call

Orange Micro
Mr. Chips ..... Call

Orchid Technology
the "Orchid Blossom"
(To 384K, Clk w/ alarm,
S&P ports, ram disk,
disk caching, upgrade-
able to PCNet)..... Call

Quadram
Quadboard 64K, (exp
384K, Clk/Cal, S&P
Ports, Software)..... $269
Microfazer Stack Printer
-P/P 8K (exp 512K) $139
-S/P 8K (exp 64K) 149
-S/S 8K (exp 64K) 149
Quadlink 64K Memory
(allows Apple SW to
run on IBM/PC)..... $469
Other Products..... Call

Tecmar Products ..... Call

Xedex/Microlog
Baby Blue..... $325
Baby Blue II 525

DISPLAY CARDS

Amdek
MAI Card $399

Fredericks/Plan-tronics Colorplus... Call

Hercules
Graphics Board..... $349
Color Board..... 199

MA Systems
PC Peacock
Color Board..... $249

Paradise
Display Card
(clr/monochrome). $379
Modular/Display.... 359

Quadram
Quadcolor I $199
Quadcolor II..... 389

Tecmar
Graphic Master..... $479

MONITORS

Amdek
300A Amber $149
310A 199
300 Clr 299
500 Clr RGB 449
600 Clr HR 549
700 Clr Ultra HR..... 629
710 Clr Non Glare 649

NEC
JB1201-12" Green..... $169
JB1260-12" Green 119
JC1216 RGB 429

Panasonic
CT160 10" comp ..... Call

PGS
HX12 RGB Clr $489
MAX 12 189
SR12 (690×480 Res) ... 639
Doubler Card..... 175

Quadram
Quadchrome $489

Sanyo
8112 12" HR Green.... $195

Taxan
440..... $679

USI 1200A
12" HR Am..... $139

Zenith
135 (RGB or comp).... $499
136 669

MODEMS

Hayes
Smartmodem 300..... $195
Smartmodem 1200 489
Smartmodem 1200B... 399

Prometheus
Promodem..... $399

Quadram
Quadmodem $529

US Robotics
Auto-Dial 300/1200 ... $459
S-100 Modem..... 349
Password..... 525

Zoom Telephonics
Networker w/o SW ... $109

DISK DRIVES

CDC 1800 ..... $209

Corona..... Call

Corvus Hd..... Call

Datamac
Trustor 10H (for
Macintosh, IIe, PC) ... Call

Davong Hd ..... Call

Maynard HD ..... Call

Mountain, Inc.
FileSafe Combo
Disk/Tape Pack for
the IBM PC or XT
Model 01-4000-04:
35MB HD w/27MB
tape backup
Model 01-4000-06:
35MB HD w/60MB
tape backup.
For more info..... Call

Tall Grass
For Wisconsin customers Call

Tandon TM-100-2..... $199

PRINTERS

C. Itoh Electronics, Inc.
Prowriter
8510 AP (Par)..... $349
8510 PC-II (Ser)
(w/ 3K Buffer)..... $499
1515P..... 599
Starwriter
F10-40P (40cps) $999
A10-20S (20cps)..... 529

Diablo
630 ECS..... Call

Juki Industries
6100..... $449

NEC..... Call

Okidata 82-93..... Call

Printek, Inc.
920 S/P $2050

Quadram
Quadjet..... Call

Star Micronics..... Call

Teletex T1014..... $399

Transtar
T-130 P&S $659
T-315 P - Dot Matrix.. 489
T-120 P&S 475

...and much more.

DISKETTES

3M 5" DS, DD Box ... $ 35

CDC ..... $ 32

Maxell 5" DS,
DD MD2 Box ..... $ 32

Verbatim
5" DS, DD, Box ..... $ 32

Ultra Magnetics 5"
DS, DD, (box/10)..... $ 32
(3 Boxes Diskettes Min.)

PLOTTERS

Enter
P100 Sweet P..... $545
Sweet P Six Shooter... Call

Houston Instruments Call

Panasonic
VP6801P Plotter..... $1375

MISC.

Alpha-Delta "MACC"
Surge Protector ..... $ 69

Computer Accessories
Power Director..... Call

Electronic Protection Devices
Lemon / EC I..... $ 45
Lime / EC II 65
Orange / EC III 105

Hauppage
87 Chip..... $159
Other Products..... Call

Kensington
Masterpiece..... Call

Keytronic
KB 5150 ..... $169
KB 5151..... 175
KB 5151 Dvorak..... 175

Street Electronics..... Call

TG..... Call

Versa Computing
VersaWriter..... $239

A variety of complete PC compatible systems are available at Oryx. For assistance in determining your needs use our technical line. We will be happy to provide full support.

POLICY:

- Wisconsin residents add 5% for sales tax.
- Minimum $4.00 for shipping, handling and insurance for orders to $200.
- For orders over $200, add 2½% for shipping, handling and insurance.
- For cash prepayment of orders $200 or more, add *ONLY* 2% for shipping, handling and insurance.
- Foreign — either add 15% handling & shipping (Int'l money order) or inquire.
- Prices are subject to change without notice.
- All items subject to availability.

WE WELCOME:

- Visa, MasterCharge and American Express. (No charge for credit cards.)
- Corporate, government or educational volume purchases, please ask for special accounts desk for additional discount. (1-715-848-1374)
- COD (Add $2.00 per box/parcel. Cash or certified check required.)
- Checks. (Allow 1-2 weeks for clearing.)

WORKING HOURS:

Monday-Friday 8:30-6:00 • Saturday 10:00-2:00 (Ordering Lines only) • Central Time
For tech. support, order status and customer service, call (715) 848-1374 (M-F, 8 am to 5 pm)

Inquiry 378 for Hardware. Inquiry 379 for Software. Inquiry 380 for January Specials.

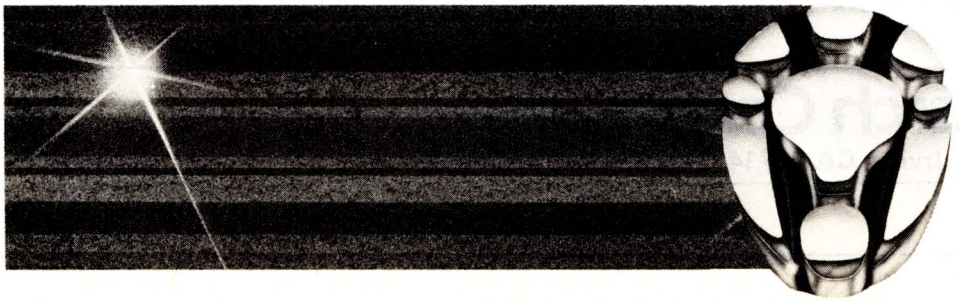

ORYX SYSTEMS, INC.
CRAFTSMEN OF THE NEW TECHNOLOGY

1 800 826-1589

WITHIN WISCONSIN **1 800 472-3535**

425 First Street • P.O. Box 1961
Wausau, Wisconsin 54401
INT'L TELEX: 260181 ORYX SYS WAU

READ AMERICA'S NUMBER 1 NON-SELLER.



Not for sale in any bookstore! Not available at any price!

The bold new booklet that has thousands of Americans writing to Pueblo, Colorado.

With all the color and excitement of the last catalog, the Consumer Information Center of the U.S. Government unveils the paperback version of the newest Consumer Information Catalog.

At last, here's the newest edition of the free catalog that lists over 200 helpful Federal publications, more than half of them free.

Publications with inside information on home repairs. Money management. Nutrition. And more.

Information that could help you to a better way of life.

So don't delay! Act today! Send no money to get your free copy.

Just write:

CONSUMER INFORMATION CENTER, DEPT. E PUEBLO, COLORADO 81009

GSA General Services Administration

If you know HUNTINGTON'S DISEASE we need to know about you... and your parents, and your children.

(it can make a big difference)

NATIONAL **HUNTINGTON'S DISEASE** ASSOCIATION

Call this number: 212-966-4320

79-12

THIS SPACE CONTRIBUTED BY THE PUBLISHER

YEAR END SPECIAL ON I.B.M. P.C.

Enhance your I.B.M. For Less

Complete CPU Board with 64KB Memory, Serial Port, Parallel Port. Runs DOS, CPM/86 and more..... **$399**

Assembled complete: Chassis with Cover, Fan, Power Supply, Filter, AC Outlet, Power Cord, Speaker..... **$399**



Power Supply 135 Watts	$189
Floppy Drive Controller	$ 99
Monochrome Card	$129
Color Graphics Card	$149
RAM Chips kit 64K	$ 39
I.B.M. Compatible Keyboard	$ 99
P.C. DOS 2.1	$ 60
A.S.T. Multifunction board	Call
Epson FX-100	Call
TEAC 55B	$149
Tandon TM 100-2	$179
P.G.S. HX-12	$469



IBM® PERSONAL COMPUTER

Special of the Month!

IBM PC® COMPLETE LINE

256K RAM, 360KB Disk Drive, FDC, Video Monitor & Adaptor 10MB Hard Disk Sub-System **$2795**

Hard Disk for IBM PC Complete Sub-System Internal 10MB H, Winchester Drive **$775**

IBM PC 256K, Floppy Controller, 2 Disk Drives 320 KB Each, Monochrome Card Monochrome Monitor **$1895**

Scientific Research Corp.

17895 Skypark Circle / Suite E • Irvine, CA 92714

714/ 261-9137

IBM PC is a registered trademark of IBM Corp.
CPM/86 is a registered trademark of Digital Research, Inc.
MS DOS is a registered trademark of Microsoft Corp.
TEAC is a registered trademark of TEAC Corp.
Taxan is a trademark of Taxan Corp.

All transactions subject to COD, Cashier Check or Prepaid

Prices and Availability subject to change without notice.

Inquiry 390

B·O·O·K·S R·E·C·E·I·V·E·D

ADVANCED BASIC AND BEYOND FOR THE IBM PC, Larry Joel Goldstein. Bowie, MD: Robert J. Brady Co., 1984; 368 pages, 17.8 by 23.5 cm, softcover, ISBN 0-89303-324-3, $19.95.

THE AMERICAN PASCAL STANDARD, Henry Ledgard, ed. New York: Springer-Verlag, 1984; 112 pages, 21.5 by 27.8 cm, softcover, ISBN 0-387-91248-7, $16.95.

APPLE GRAPHICS ACTIVITIES HANDBOOK, Harold J. Bailey and J. Edward Kerlin. Bowie, MD: Robert J. Brady Co., 1984; 432 pages, 17.8 by 23.5 cm, softcover, ISBN 0-89303-308-1, $16.95.

THE APPLE IIE PERSONAL COMPUTER FOR BEGINNERS, Seamus Dunn and Valerie Morgan. Englewood Cliffs, NJ: Prentice-Hall, 1984; 272 pages, 15 by 22.5 cm, softcover, ISBN 0-13-038969-2, $14.95.

THE APPLE WRITER II HANDBOOK FOR THE IIE, Kate Lee Johnson. Somerville, MA: Curtin & London, 1984; 108 pages, 21.5 by 28 cm, softcover, ISBN 0-939764-82-X, $19.50.

THE ART OF COMPUTER MANAGEMENT, Jim McNitt. New York: Simon and Schuster, 1984; 272 pages, 14.8 by 22 cm, hardcover, ISBN 0-671-46471-X, $15.95.

ARTIFICIAL INTELLIGENCE TOOLS, TECHNIQUES, AND APPLICATIONS, Tim O'Shea and Marc Eisenstadt, eds. New York: Harper & Row, 1984; 512 pages, 18.5 by 23.5 cm, softcover, ISBN 0-06-041894-X, $22.95.

ATARI USER'S GUIDE, Mark Ellis, Robert Ellis, and Larry Joel Goldstein. Bowie, MD: Brady Communications Co., 1984; 286 pages, 17.8 by 23.5 cm, softcover, ISBN 0-89303-323-5, $15.95.

BASIC EXERCISES FOR THE IBM PCJR, Jean-Pierre Lamoitier. Berkeley, CA: Sybex, 1984; 270 pages, 17.5 by 22.5 cm, softcover, ISBN 0-89588-218-3, $15.95.

BASIC PROGRAM CONVERSIONS, the editors of Computer Skill Builders. Tucson, AZ: HP Books, 1984; 240 pages, 21.8 by 27.5 cm, softcover, ISBN 0-89586-297-2, $12.95.

BIG DECISIONS FOR SMALL BUSINESS, Linda Strosberg. New York: Harper & Row, 1984; 148 pages, 18.8 by 23.3 cm, softcover, ISBN 0-06-046485-2, $15.95.

BLAST OFF WITH BASIC GAMES FOR YOUR VIC-20, David D. Busch. Bowie, MD: Robert J. Brady Co., 1984; 192 pages, 17.8 by 23.5 cm, softcover, ISBN 0-89303-334-0, $12.95.

C, A REFERENCE MANUAL, Samuel P. Harbison and Guy L. Steele Jr. Englewood Cliffs, NJ: Prentice-Hall, 1984; 368 pages, 18.3 by 24 cm, hardcover, ISBN 0-13-110016-5, $24.95.

THE CAMPUS AND THE MICROCOMPUTER REVOLUTION, J. Victor Baldridge, Janine Woodward Roberts, and Terri A. Weiner. New York: American Council on Education and Macmillan Publishing, 1984; 192 pages, 16 by 24 cm, hardcover, ISBN 0-02-901370-4, $19.95.

THE COLECO ADAM ENTERTAINER, Brian Sawyer. Berkeley, CA: Osborne/McGraw-Hill, 1984; 190 pages, 20.5 by 27.5 cm, softcover, ISBN 0-88134-134-7, $12.95.

COMMODORE 64 BASIC PROGRAMMING AND APPLICATIONS, Larry Joel Goldstein and Fred Mosher. Bowie, MD: Robert J. Brady Co., 1984; 320 pages, 17.8 by 23.5 cm, softcover, ISBN 0-89303-381-2, $15.95.

COMMODORE 64 SUBROUTINE COOKBOOK, David D. Busch. Bowie, MD: Robert J. Brady Co., 1984; 208 pages, 17.8 by 23.5 cm, softcover, ISBN 0-89303-383-9, $12.95.

COMPUTER, David L. Heiserman. Blue Ridge Summit, PA: Tab Books, 1984; 208 pages, 18.8 by 23.5 cm, softcover, ISBN 0-8306-1741-8, $11.50.

THE COMPUTER DATA AND DATABASE SOURCE BOOK, Matthew Lesko. New York: Avon Books, 1984; 944 pages, 15.5 by 22.8 cm, softcover, ISBN 0-380-86942-X, $14.95.

A COMPUTER DICTIONARY FOR KIDS AND OTHER BEGINNERS, David Fay Smith. New York: Ballantine Books, 1984; 112 pages, 20 by 25.3 cm, softcover, ISBN 345-31693-2, $9.95.

COMPUTER FUNDAMENTALS, Barbara Kurshan and Nancy Healy. Reston, VA: Reston Publishing, 1984; 222 pages, 21.5 by 28 cm, spiral-bound, ISBN 0-8359-0939-5, $16.95.

COMPUTER HUNTING, Susan B. Perricone and Charles R. Schneider. New York: Harper & Row, 1984; 256 pages, 18.5 by 23.5 cm, softcover, ISBN 0-06-046575-1, $16.95.

COMPUTER MATHEMATICS, D. J. Cooke and H. E. Bez. New York: Cambridge University Press, 1984; 408 pages, 16 by 23.5 cm, hardcover, ISBN 0-521-25341-1, $49.50.

THE COMPUTER TUTOR: IBM PERSONAL COMPUTER EDITION, Gary W. Orwig and William S. Hodges. Boston, MA: Little, Brown and Co., 1984; 242 pages, 21.5 by 28 cm, softcover, ISBN 0-316-66503-7, $15.95.

COMPUTERS IN CRISIS, Jerome T. Murray and Marilyn J. Murray. Princeton, NJ: Petrocelli Books, 1984; 360 pages, 18.3 by 26 cm, hardcover, ISBN 0-89433-223-6, $32.95.

COMPUTERS: THE NON-TECHNOLOGICAL (HUMAN) FACTORS, John L. Burch, ed. Lawrence, KS: The Report Store, 1984; 106 pages, 17.3 by 21.3 cm, softcover, ISBN 0-916313-00-X, $34.50.

COMPUTERSPACE: HOME DESIGN STRATEGIES THAT WORK FOR COMPUTERS, James Wagenvoord. New York: Perigee Books, 1984; 128 pages, 18.8 by 23 cm, softcover, ISBN 0-399-51020-6, $14.95.

COMPUTING FOR PROFITS, Allan H. Schmidt and Ira Alterman. New York: Macmillan Publishing, 1984; 320 pages, 14 by 21 cm, softcover, ISBN 0-02-008760-8, $10.95.

CONTEMPORARY BUSINESS LETTERS WITH APPLE WRITER II FOR THE IIE, Jane E. Robbins and Kate Lee Johnson. Somerville, MA: Curtin & London, 1984; 240 pages, 21.3 by 27.8 cm, softcover, ISBN 0-930764-80-3, $19.50.

COPING: SURVIVAL IN A COMPUTERIZED SOCIETY, Robert S. Cheney and Jean E. Cheney. Princeton, NJ: Petrocelli Books, 1984; 230 pages, 15.5 by 23.3 cm, softcover, ISBN 0-89433-232-5, $19.95.

CREATING COURSEWARE, Ruth K. Landa. New York: Harper & Row, 1984; 318 pages, 20.5 by 27 cm, spiral-bound, ISBN 0-06-043837-1, $20.95.

DIGITAL COMMUNICATIONS PROGRAMMING ON THE IBM PC, W.

(continued)

THIS IS A LIST of books recently received at BYTE Publications. The list is not meant to be exhaustive, its purpose is to acquaint BYTE readers with recently published titles in computer science and related fields. We regret that we cannot review or comment on all the books we receive; instead, this list is meant to be a monthly acknowledgment of these books and the publishers who sent them.

HARMONY VIDEO & COMPUTERS
2357 CONEY ISLAND AVE., BROOKLYN, NY 11223
TO ORDER CALL TOLL FREE
800-VIDEO84 OR 718-627-1000 OR 800-441-1144



IBM PC w/DRIVE $1299.95
APPLE 2C $869.95
OKIDATA 92 $356.95
GEMINI 10X $229.95

"PRINTER SPECIALS"

Okidata 92	356	Radix 15	575	Panasonic KXP 1091	259
Okidata 93	559	Radix 10	489	Panasonic KXP 1090	204
Epson RX80 FT	291	Powertype	296	Silver Reed EXP 550	389
Epson RX80	237	Daisywriter	789	Silver Reed EXP 500	292
Epson RX100	395	Brother HR15	345	Silver Reed EXP 770	759
Epson Fx80	399	Brother HR25	579	Nec 3550	1334
Epson FX100	598	Brother HR35	794	Nec 2050	659
Epson LQ1500	1118	Keyboard	129	Olympia RO	319
Toshiba 1351	1229	Riteman Blue +	279	Nec 7730	1674
Delta 10	338	Diablo 620 API	699	Nec 7715	1674
Delta 15	464	Mannesman Spirit 80	237	OKI 84	648
Gemini 10X	229	Mannesman 160L	539	Panasonic KXP 1093	578
Gemini 15X	339	Juki 6100	364	Panasonic KXP 1092	389

WOW!

IBM		MONITORS		ATARI	
PC w/Drive	1299	Amdek 300 Green	114	800 XL	114
PC XT	2499	Amdek 300 Amber	124	1027 Printer	169
Portable	1799	310 Amber	139	1050 Drive	159
PC Jr	459	Color 300	229	Indus. Drive	279
Color Card	169	Color 500	324		
IBM Monitor (GRN)	244	Color 600	384		
Hercules Graphic Master	329	Color 700	489		
Tecmar Captain 64K	279	Color 710	529	APPLE	
AST Six Pack	239	Zenith Green	74	2E w/Disk Drive	859
Tallgrass 20 Meg	2399	Taxan 210	209	Macintosh	1689
Quad Board	224			Apple 2C	869
Paradise	254			Imagewriter	486
Hercules	164			Addt. Drives	from $99
Keytronics	159				
		SANYO			
		550 S.S.	648		
		550 D.S.	659		
COMMODORE		555 D.S.	949	MODEMS	
Commodore 64	189	CRT 30	99	Hayes 1200	444
1541 Disk Drive	204			Hayes 1200B	389
1702 Monitor	208	800-441-1144		Hayes 300	189
MPS801 Printer	179			Micromodem 2E	214
1526 Printer	215			Access 123	374
				Novation J-cat	95

The Little Board™ ...$349*
The world's simplest and least expensive CP/M computer



NEW SCSI/PLUS™ EXPANSION I/O OPTION

CP/M 2.2 INCLUDED

***UNDER $200 IN OEM QUANTITIES**

- 4 MHz Z80A CPU, 64K RAM, Z80A CTC, 2732 Boot ROM
- Mini/Micro Floppy controller (1-4 Drives, Single/Double Density, 1-2 sided, 40/80 track)
- Only 5.75 x 7.75 inches, mounts directly to a 5 1/4" floppy drive
- 2 RS232C Serial Ports (75-9600 baud & 75-38,400 baud), 1 Centronics Printer Port
- Power Requirement: +5VDC at .75A; +12VDC at .05A/On-board -12V converter
- CP/M 2.2 BDOS • ZCPR3 CCP • Enhanced AMPRO BIOS
- AMPRO Utilities included:
  - read/write to more than 2 dozen other formats (Kaypro, Televideo, IBM CP/M86....)
  - format disks for more than a dozen other computers
  - menu-based system customization
- BIOS and Utilities Source Code Available
- SCSI/PLUS Adapter:
  - Mounts directly to Little Board • Slave I/O board control • Full ANSC X3T9.2
  - 16 bidirectional I/O lines • $99/Quantity 1

AMPRO COMPUTERS, INCORPORATED

Distributor/Dealer/Reps Inquiries Invited

Z80A is a registered trademark of Zilog, Inc.
CP/M is a registered trademark of Digital Research.

67 East Evelyn Ave. • Mountain View, CA 94041 • (415) 962-0230 • TELEX 4940309

BOOKS RECEIVED

David Schwaderer. New York: John Wiley & Sons, 1984; 352 pages, 17 by 25 cm, softcover, ISBN 0-471-89016-2, $47.90. Includes floppy disk.

EASY INTERFACING PROJECTS FOR THE VIC-20, Jim Downey, Don Rindsberg, and William Isherwood. Englewood Cliffs, NJ: Prentice-Hall, 1984; 176 pages, 17.5 by 23.3 cm, softcover, ISBN 0-13-223421-1, $10.95.

ELECTRONIC LIFE, Michael Crichton. New York: Ballantine Books, 1983; 276 pages, 10.5 by 17.5 cm, softcover, ISBN 0-345-31739-4, $3.95.

50 SIMPLE, READY-TO-RUN VIC-20 PROGRAMS, Barbara Fulgham. Blue Ridge Summit, PA: Tab Books, 1984; 176 pages, 18.8 by 23.3 cm, softcover, ISBN 0-8306-1754-X, $6.95.

GETTING INTO COMPUTERS, Kurt Hanks. Chatsworth, CA: Datamost, 1984; 128 pages, 20.8 by 27.5 cm, softcover, ISBN 0-88190-395-7, $12.95.

GRAPHICS MADE EASY FOR THE IBM PC AND XT, Gabriel Cuellar. Reston, VA: Reston Publishing, 1984; 464 pages, 17.8 by 23.3 cm, softcover, ISBN 0-8359-2569-2, $18.95.

HANDBOOK OF APPLESOFT BASIC FOR THE APPLE II AND IIE, Roy Earl Myers and David I. Schneider. Bowie, MD: Brady Communications Co., 1984; 336 pages, 17.5 by 23.3 cm, softcover, ISBN 0-89303-504-1, $16.95.

HANDBOOK OF BASIC FOR THE COMMODORE 64, Frederick E. Mosher and David I. Schneider. Bowie, MD: Robert J. Brady Co., 1984; 368 pages, 17.8 by 23.5 cm, softcover, ISBN 0-89303-505-X, $14.95.

HANDBOOK OF COMPUTER APPLICATIONS FOR THE SMALL OR MEDIUM-SIZED BUSINESS, Howard Falk. Radnor, PA: Chilton Book Co., 1983; 350 pages, 18.3 by 23 cm, softcover, ISBN 0-8019-7393-7, $19.95.

HARNESSING INFORMATION TECHNOLOGIES, Carolyn J. Mullins and Thomas W. West. Englewood Cliffs, NJ: Prentice-Hall, 1984; 256 pages, 17.3 by 23.3 cm, softcover, ISBN 0-13-383829-3, $10.95.

HOUSEHOLD BUDGETING AND ACCOUNTING ON YOUR HOME COMPUTER, Fred N. Grayson. New York: Perigee Books, 1984; 96 pages, 20.5 by 27.3 cm, softcover, ISBN 0-399-50986-0, $5.95.

THE IBM PC AND ITS APPLICATIONS, Laurence Press. New York: John Wiley & Sons, 1984; 366 pages, 17 by 25.3 cm, software, ISBN 0-471-88440-5, $14.95.

THE IBM PCJR USER'S GUIDE, Michael Bane. New York: Macmillan Publishing, 1984; 126 pages, 13.5 by 21 cm, softcover, ISBN 0-02-008810-8, $5.95.

THE IBM PC/XT GRAPHICS BOOK, John Fowler. Englewood Cliffs, NJ: Prentice-Hall, 1984; 366 pages, 17.8 by 23.3 cm, softcover, ISBN 0-13-448416-9, $29.95. Includes floppy disk.

THE ILLUSTRATED MS-DOS-WORDSTAR HANDBOOK, Russell A. Stultz. Englewood Cliffs, NJ: Prentice-Hall, 1984; 288 pages, 15.3 by 22.5 cm, softcover, ISBN 0-13-451089-5, $14.95.

LEARN TO TYPE ON YOUR HOME COMPUTER, Fred N. Grayson. New York: Perigee Books, 1984; 96 pages, 20.5 by 27.3 cm, softcover, ISBN 0-399-50991-7, $5.95.

LEARNING TI 99/4A HOME COMPUTER ASSEMBLY LANGUAGE PROGRAMMING, Ira McComic. Plano, TX: Wordware Publishing, 1984; 344 pages, 19 by 23.3 cm, softcover, ISBN 0-13-527862-7, $16.95.

LEARNING WITH APPLE LOGO, Daniel Watt. New York: McGraw-Hill, 1984; 336 pages, 20.5 by 27.8 cm, spiral-bound, ISBN 0-07-068571-1, $19.95.

LET'S LEARN BASIC, A KIDS' INTRODUCTION TO BASIC PROGRAMMING ON IBM PERSONAL COMPUTERS, Ben Shneiderman. Boston, MA: Little, Brown and Co., 1984; 208 pages, 19 by 23.3 cm, softcover, ISBN 0-316-78726-4, $8.95.

LET'S LEARN BASIC, A KIDS' INTRODUCTION TO BASIC PROGRAM-

Inquiry 21

BOOKS RECEIVED

MING ON THE COMMODORE 64, Ben Shneiderman. Boston, MA: Little, Brown and Co., 1984; 208 pages, 19 by 23.3 cm, softcover, ISBN 0-316-78725-6, $8.95.

LOGIC AND MACHINES: DECISION PROBLEMS AND COMPLEXITY, E. Borger, G. Hasenjaeger, and D. Rodding, eds. Lecture Notes in Computer Science #171. New York: Springer-Verlag, 1984; 464 pages, 16.5 by 24 cm, softcover, ISBN 0-387-13331-3, $20.

LOTUS 1-2-3 SIMPLIFIED, David Bolocan. Blue Ridge Summit, PA: Tab Books, 1984; 192 pages, 18.8 by 23.5 cm, softcover, ISBN 0-8306-1748-X, $10.25.

MICROCOMPUTING IN SPORT AND PHYSICAL EDUCATION, David A. Brodie and John J. Thornhill. New York: Sterling Publishing Co., 1983; 160 pages, 19.8 by 25.3 cm, hardcover, ISBN 0-86019-106-0, $16.95.

MICROPROCESSORS: HARDWARE AND APPLICATIONS, Andrew Veronis. Reston, VA: Reston Publishing, 1984; 944 pages, 18.5 by 24.3 cm, hardcover, ISBN 0-8359-4382-8, $34.95.

MICROS, MINIS AND MAINFRAMES, D. Michael Werner and Thomas W. Warrner. Radnor, PA: Chilton Book Co., 1984; 420 pages, 18.5 by 22.8 cm, softcover, ISBN 0-8019-7303-1, $19.95.

MR. BABBAGE'S SECRET, Ole Immanuel Franksen. Birkerod, Denmark: Strandbergs Forlag, 1984; 320 pages, 17.8 by 22 cm, hardcover, ISBN 87-872-0086-4, $30.

MODERN INTELLECTUAL PROPERTY, Michael A. Epstein. Clinton, NJ: Harcourt Brace Jovanovich, 1984; 650 pages, 19 by 25.3 cm, 5-punch binder, ISBN 0-15-004367-8, $75.

101 PROGRAMMING SURPRISES & TRICKS FOR YOUR APPLE II/IIE COMPUTER, David L. Heiserman. Blue Ridge Summit, PA: Tab Books, 1984; 208 pages, 18.5 by 23.5 cm, softcover, ISBN 0-8306-1721-3, $11.50.

101 PROGRAMMING SURPRISES & TRICKS FOR YOUR ATARI COMPUTER, David L. Heiserman. Blue Ridge Summit, PA: Tab Books, 1984; 208 pages, 18.5 by 23.5 cm, softcover, ISBN 0-8306-1731-0, $11.50.

101 PROGRAMMING SURPRISES & TRICKS FOR YOUR IBM PC COMPUTER, David L. Heiserman. Blue Ridge Summit, PA: Tab Books, 1984; 208 pages, 18.5 by 23.5 cm, softcover, ISBN 0-8306-1711-6, $11.50.

101 PROGRAMMING SURPRISES & TRICKS FOR YOUR TRS-80 COMPUTER, David L. Heiserman. Blue Ridge Summit, PA: Tab Books, 1984; 208 pages, 18.5 by 23.5 cm, softcover, ISBN 0-8306-1741-8, $11.50.

ONLINE GUIDE FOR THE COMMODORE COMPUTERS, Mike Cane. New York: New American Library, 1984; 400 pages, 15.3 by 22.8 cm, softcover, ISBN 0-451-82084-3, $9.95.

THE OSBORNE/MCGRAW-HILL MS-DOS USER'S GUIDE, Paul Hoffman and Tamara Nicoloff. Berkeley, CA: Osborne/McGraw-Hill, 1984; 218 pages, 18.8 by 23.3 cm, softcover, ISBN 0-88134-131-2, $17.95.

PC GRAPHICS, Dick Conklin. New York: John Wiley & Sons, 1983; 192 pages, 17 by 25 cm, softcover, ISBN 0-471-89207-6, $15.95.

PERFECT WRITER MADE PERFECTLY CLEAR, Elyse Sommer. Radnor, PA: Chilton Book Co., 1984; 190 pages, 18.5 by 22.8 cm, softcover, ISBN 0-8019-7427-5, $12.95.

PERSONAL COMPUTERS FOR THE SUCCESSFUL SMALL BUSINESS, Donald Hockney. New York: Macmillan Publishing Co., 1984; 208 pages, 16.3 by 24 cm, hardcover, ISBN 0-02-551870-4, $19.95.

PERSONAL MONEY MANAGEMENT WITH YOUR MICRO, Wendy L. Milner. Blue Ridge Summit, PA: Tab Books, 1984; 240 pages, 18.5 by 23.5 cm, softcover, ISBN 0-8306-1709-4, $13.50.

POCKET COMPUTING POWER!, Henry Mullish and Richard Kestenbaum. New York: Harper & Row, 1984; 192 pages, 15.5 by 23.5 cm, softcover, ISBN 0-06-044659-5, $12.95.

(continued)

FREE SHIPPING
DISKETTES
West Coast "Call" 1(800) 621-6221
Central & East "Call" 1(800) 654-4058
Discounts Starting at 3 Box Quantities

3M
5¼"
s-side d-den. 17.95
d-side d-den. 23.95
s-side quad 27.50
d-side quad 33.95
8"
s-side s-den. 21.50
s-side d-den. 26.00
d-side d-den. 31.50

Dysan
5¼"
s-side d-den. 22.95
d-side d-den. 30.50
s-side quad 34.50
d-side quad 45.50
8"
s-side s-den. 28.50
s-side d-den. 30.95
d-side d-den. 34.95

maxell
3½" CALL
5¼"
s-side d-den. 19.95
d-side d-den. 25.95
s-side quad 28.95
d-side quad 36.95
8"
s-side d-den. 31.95
d-side d-den. 34.95

Verbatim
5¼ Datalife
s-side d-den. 18.95
d-side d-den. 24.95
s-side quad 30.95
d-side quad 39.95
8" Datalife
s-side s-den. 24.75
s-side d-den. 26.95
d-side d-den. 31.95

3M
DC100A....13.95
DC300A....18.40
DC300XL 20.25
DC600A..24.45

AMARAY MEDIA MATE
(3½"...11.95) (5¼"...11.95)
DISK MINDERS
(5¼"....16.75) (8"...21.50)
BULK PACKED DISKS "CALL"

Head Cleaners
Kits.....5.20
Refills...9.55
Analizers 25.00

Diskettes 10/Box
the Diskette Connection™
Dealer Inquiries Welcomed
1(800) 654-4058
OKLAHOMA & NEVADA
UPS Delivery Only, Add 3.00 on orders under 35.00 or 20 disk.

NEW MODEMS ARE CHEAPER THAN 250 FT CABLES* AND OPERATE UP TO 19,200 BAUD!

- No AC or DC Power required
- Derives power from signal leads
- Male or Female connectors
- 4-wire line termination with screw terminals or phone jacks
- DTE/DCE selector switch
- Operates from DC to 19,200 baud
- 1 mile at 19,200, 3 miles at 9600 baud
- Only $77 in single unit quantity

*Cost comparison (250 ft extended distance data cable)

Data Cable	Model 81
Cable cost = $20 + .80/ft	Modem cost = $77
(250 × .80) + 20 = $220	Twisted pair (2) @ 500ft = $30
	(2 × 77) + 30 = $184
Maximum baud rate = 9600	Maximum baud rate = 19,200



TELEBYTE
TECHNOLOGY INC.
148 New York Avenue
Halesite, New York 11743
(516) 423-3232
TWX 510-226-0449
A Public Company

Could you pass this Red Cross swimming test?

SWIM:

1. Breaststroke—100 Yds.
2. Sidestroke—100 Yds.
3. Crawl stroke—100 Yds.
4. Back crawl—50 Yds.
5. On back (legs only)—50 Yds.
6. Turns (on front, back, side).
7. Surface dive—underwater swim—20 Ft.
8. Disrobe—float with clothes—5 mins.
9. Long shallow dive.
10. Running front dive.
11. 10-minute swim.

Anybody who's taken a Red Cross swim course knows how tough it can be. There's a good reason.

We believe drowning is a serious business.

Last year alone, we taught 2,589,203 Americans not to drown—in the seven different swim courses we offer all across the country. (Incidentally, most of the teaching—as with almost everything American Red Cross does—is done by dedicated volunteers.)

A good many of the youngsters not only are learning to keep *themselves* safe. Thousands upon thousands of them are learning to become lifesavers.

And the life they save—may be your own.

Red Cross is counting on you.

A Public Service of This Magazine & The Advertising Council Ad Council

BOOKS RECEIVED

THE POWER OF: APPLEWORKS, Robert E. Williams. Portland, OR: Management Information Source, 1984; 238 pages, 21 by 27.5 cm, softcover, ISBN 0-943518-16-4, $19.95.

PROGRAMMING THE IBM PC & XT, Clarence B. Germain. Bowie, MD: Robert J. Brady Co., 1984; 346 pages, 17.8 by 23.5 cm, softcover, ISBN 0-89303-783-4, $19.95.

THE RESTON DIRECTORY OF ON-LINE DATABASES, Jay M. Shafritz and Louise Alexander. Reston, VA: Reston Publishing, 1984; 254 pages, 21.5 by 28 cm, softcover, ISBN 0-8359-6666-6, $17.95.

SELECTING THE RIGHT DATA BASE SOFTWARE FOR THE IBM PC, Kathleen McHugh and Veronica Corchado. Berkeley, CA: Sybex, 1984; 128 pages, 15.3 by 22.8 cm, softcover, ISBN 0-89588-174-8, $6.95.

SELECTING THE RIGHT SPREADSHEET SOFTWARE FOR THE IBM PC, Kathleen McHugh and Veronica Corchado. Berkeley, CA: Sybex, 1984; 142 pages, 15.3 by 22.8 cm, softcover, ISBN 0-89588-178-0, $6.95.

SELECTING THE RIGHT WORD PROCESSING SOFTWARE FOR THE IBM PC, Kathleen McHugh and Veronica Corchado. Berkeley, CA: Sybex, 1984; 114 pages, 15.3 by 22.8 cm, softcover, ISBN 0-89588-177-2, $6.95.

SHAPES AND SOUNDS FOR THE ATARI, Herb Moore. New York: John Wiley & Sons, 1984; 132 pages, 13.8 by 21.5 cm, softcover, ISBN 0-471-88547-9, $45. Includes two floppy disks.

SIMPLIFIED BASIC PROGRAMMING FOR MICROCOMPUTERS, Gerald A. Silver and Myrna Silver. New York: Harper & Row, 1984; 320 pages, 18.8 by 23.5 cm, softcover, ISBN 0-06-046162-4, $15.95.

SMALL BUSINESS PROGRAMS FOR THE COMMODORE 64, S. Roberts. Holzkirchen, West Germany: Ing. W. Hofacker GmbH, 1984; 136 pages, 13 by 21 cm, softcover, ISBN 3-88963-186-X, $9.95.

SMALL BUSINESS PROGRAMS FOR THE IBM PC, F. Ende. Holzkirchen, West Germany: Ing. W. Hofacker GmbH, 1984; 120 pages, 13 by 21 cm, softcover, ISBN 3-88963-052-9, $12.95.

SMART BASIC FOR THE ADAM, Bill Searle and Donna Jones. Bowie, MD: Robert J. Brady Co., 1984; 384 pages, 17.8 by 23.5 cm, softcover, ISBN 0-89303-846-6, $11.95.

THE SOFTWARE CATALOG, Spring 1984 ed. New York: Elsevier Science Publishing Co., 1984; 1412 pages, 21.3 by 27.8 cm, softcover, ISBN 0-444-00914-0, $75.

THE STATE-OF-THE-ART ROBOT CATALOG, Phil Berger. New York: Dodd, Mead & Co., 1984; 160 pages, 19 by 23.3 cm, softcover, ISBN 0-396-08361-7, $12.95.

TRS-80 MODELS III & 4, Larry Joel Goldstein. Bowie, MD: Brady Communications Co., 1984; 320 pages, 17.8 by 23.5 cm, softcover, ISBN 0-89303-903-9, $15.95.

UNIX ON THE IBM PC, William B. Twitty. Englewood Cliffs, NJ: Prentice-Hall, 1984; 224 pages, 15 by 22.3 cm, softcover, ISBN 0-13-939075-8, $14.95.

THE UNIX SYSTEM ENCYCLOPEDIA. Los Altos, CA: Yates Ventures, 1984; 448 pages, 21.3 by 27.3 cm, softcover, ISBN 0-917195-00-0, $34.95.

USING & PROGRAMMING THE MACINTOSH, Frederick Holtz. Blue Ridge Summit, PA: Tab Books, 1984; 254 pages, 18.5 by 23.5 cm, softcover, ISBN 0-8306-1840-6, $12.50.

USING MICROSOFT COMPILED BASIC, Murray L. Lesser. New York: McGraw-Hill, 1985; 288 pages, 15 by 22.8 cm, softcover, ISBN 0-07-037302-7, $16.95.

USING THE IBM PCJR, Kenniston W. Lord Jr. New York: Van Nostrand Reinhold, 1984; 384 pages, 15.3 by 22.8 cm, softcover, ISBN 0-442-25964-6, $16.50. ■

a message to our subscribers

From time to time we make the BYTE subscriber list available to other companies who wish to send our subscribers material about their products. We take great care to screen these companies, choosing only those who are reputable, and whose products, services, or information we feel would be of interest to you. Direct mail is an efficient medium for presenting the latest personal computer goods and services to our subscribers.

Many BYTE subscribers appreciate this controlled use of our mailing list, and look forward to finding information of interest to them in the mail. Used are our subscribers' names and addresses only (no other information we may have is ever given).

While we believe the distribution of this information is of benefit to our subscribers, we firmly respect the wishes of any subscriber who does not want to receive such promotional literature. Should you wish to restrict the use of your name, simply send your request to the following address.

BYTE Publications Inc.
Attn: Circulation Department,
70 Main St., Peterborough, NH 03458

SOURCETEK
SWITCHING POWER SUPPLY

IPS-135



EXACTLY FIT TO IBM PC/XT
OUTPUT
2 DISK DRIVES
2 HARD DISKS
AC INPUT
115V or 220V

1 YEAR WARRANTY

IBM OR COMPATIBLE ADD-ON CARD

DISK CONTROL CARD WITH CABLE	$99.00
COLOR GRAPHIC CARD	$145.00
SERIAL INTERFACE CARD	$60.00
PARALLEL PRINTER CARD	$60.00
MONOCHROME CARD	$185.00
IDEAMAX 384 MULTI-FUNCTION CARD WITH 384K RAM	$399.00
IPS-135W POWER SUPPLY	$160.00
HALF HEIGHT DISK DRIVE	$129.00

MEPTT®

MICTRO (U.S.A.) INC.
1807 S. SAN GABRIEL BLVD. SUITE B
SAN GABRIEL, CA 91776
TEL: (818) 288-8422, (408) 738-3105

DEALER, OEM, DISTRIBUTOR WANTED
IBM is a trademark of I.B.M. Corp.

Subscription Problems?

We want to help!

If you have a problem with your BYTE subscription, write us with the details. We'll do our best to set it right. But we ***must*** *have the name, address, and* ***zip*** *of the subscription (new and old address, if it's a change of address). If the problem involves a payment, be sure to include copies of the credit card statement, or front and back of cancelled checks. Include a "business hours" phone number if possible.*



BYTE

Subscriber Service
P.O. Box 328
Hancock, NH 03458

NEW SYSTEMS

Sanyo Introduces MBC 775

Sanyo's MBC 775 is an IBM PC-compatible portable color computer. It features the 8088 processor and provides for the 8087 chip. Its 256K-byte RAM is expandable to 640K bytes. Also standard are two 5¼-inch 360K-byte floppy-disk drives and a built-in 9-inch color monitor.

The MBC 775's detachable keyboard has 84 keys, including a numeric keypad and special-function keys. Two expansion slots will accept IBM PC-compatible add-on boards, and a Centronics parallel port lets the operator connect the color computer to most printers.

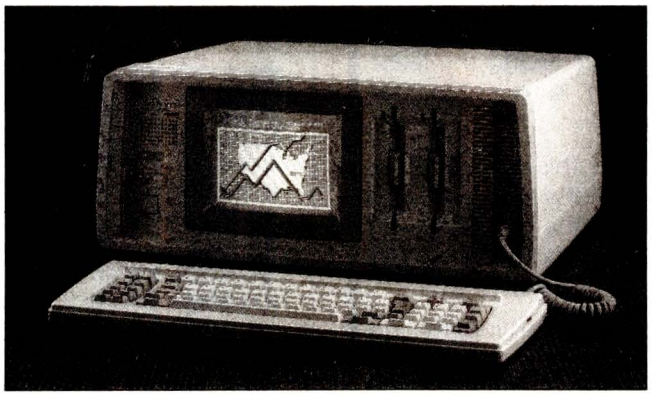

The Sanyo's screen accommodates 80 by 25 characters in regular mode and 40 by 25 characters in double-sized mode. The machine has 16-color graphics capabilities with 640- by 200-pixel resolution in color mode. In black-and-white mode, resolution is 320 by 200 pixels.

Bundled software for the MBC 775 includes EasyWriter 2, EasyMailer, EasyPlanner, and EasyFiler. Its operating system is MS-DOS 2.11, and it also features GW-BASIC.

Among several available options are an RS-232C serial board, an expansion RAM board, a Sanyo monochrome monitor CRT 30/CRT 36, the Sanyo color monitor CRT 70, and the Sanyo PR 5000 and PR 5500 letter-quality printers.

The MBC 775 retails for $2599. Contact Sanyo Business Systems Corp., 51 Joseph St., POB 387, Moonachie, NJ 07074-1098, (201) 440-9300.

Inquiry 513.

Ergo-Intelligent Personal Computers

Ericsson Information Systems has introduced a series of IBM PC-compatible personal computers that offers ergonomic features. For example, the operator can mount the system console vertically beneath a desk, and a special cooling fan reduces the noise level.

The Ergo-Intelligent series comes with a 12-inch monochrome or color Ergo-Screen monitor. The non-glare monochrome display has amber characters and 640- by 400-pixel resolution. The color monitor has a maximum resolution of 320 by 200. The monitors can display text and graphics simultaneously; they use a modified typeface to improve clarity. An Ergo-Arm display stand lets you control the monitor's height and angle.

The Ergo-Touch keyboard uses 84 enlarged alphanumeric keys in the IBM PC XT layout. It has 10 function keys and indicator lights for the Num Lock and Caps Lock keys. The numeric keypad has its own Enter key.

The Ergo-Intelligent computer uses the 8088 processor, has 256K bytes of RAM, and provides for use of the 8087 math coprocessor. It features two 360K-byte floppy-disk drives or one floppy drive and a 10-megabyte hard-disk drive. Other hardware features include five IBM bus-compatible expansion slots, one RS-232C serial port, and one Centronics parallel port.

Prices depend on configuration. The basic model, designated the 8512-254S, comes with a dual disk drive, 256K bytes of RAM, monochrome monitor, graphics board, Ergo-Arm, floor stand, extended cable, keyboard, and DOS. It costs $3295; with a color monitor it's $3769. A system with a single floppy-disk drive and a 10-megabyte hard-disk drive sells for $5230; that system with a color monitor is $5695. Contact Ericsson Information Systems, Greenwich Office Park 1, POB 2522, Greenwich, CT 06836-2522, (203) 661-1666.

Inquiry 514.

Multiuser UNIX Workstation

Heurikon Corporation has introduced the Minibox, a multiuser UNIX System III or V workstation that uses the 68000/68010 processor. It features a built-in C compiler, six Multibus card slots, single or dual 5¼-inch floppy-disk drives, 30- to 280-megabyte Winchester hard-disk storage, and an interactive streaming-tape drive.

The Minibox is based on the Heurikon HK68 microcomputer, providing 8- or 10-MHz processor performance, quad-channel DMA, 64K bytes of EPROM, 512K bytes to 1 megabyte of RAM, two iSBX expansion connectors, MMU (addresses 16 megabytes of RAM), four serial I/O ports (expandable to 12), three 16-bit counter timers, and two parallel I/O ports.

Two forward drive bays hold one or two 5¼-inch floppy-disk drives or a 5¼-inch floppy drive and an interactive streaming-tape drive. Two rear drive bays hold one or two 5¼-inch Winchester hard-disk drives.

Prices vary depending on configuration. A standard system with 512K bytes of RAM on a single card and a 30-megabyte hard-disk drive sells for $14,675; the same system with a 65-megabyte hard-disk drive is $15,375. Contact Heurikon Corp., 3201 Latham Dr., Madison, WI 53713, (800) 356-9602; in Wisconsin, (608) 271-8700.

Inquiry 515.

NEW SYSTEMS

The S-100+ Outboard Bus

S-100+ from IMS International combines a high-speed, outboard, networking bus with the standard S-100 bus. The bidirectional outboard bus lets data transfer occur on a priority basis using byte-wide high-speed transfer components.

S-100+ eliminates bus contention problems. Simultaneous data transfer can be made from the master processor to the storage device and to the network slaves. A two-wire cable, daisy-chained from the master to the slaves, allows equal access to the bus through priority interrupts.

This design uses the following new circuit boards: a 16-bit 80186 8-MHz master board with one or two 512K-byte RAM boards, 80186 slave boards with 256K bytes of on-board RAM, and 8-bit Z80B 6-MHz master/slave boards with 128K bytes of on-board bank-switchable RAM.

The operating system for the S-100+, TurboDOS 1.40+, contains a PC-DOS/MS-DOS 1.1 emulator and allows a DMA transfer of data at up to 1 megabyte per second. All S-100+ boards are designed for both asynchronous and synchronous communications, and 3270 and 3780 communications software has been integrated into all models.

A basic S-100+ system, the 5000SX, has the potential for up to nine users and features TurboDOS, a Z80B file server, two serial ports, a paddleboard, a DMA floppy-disk drive controller, 128K bytes of RAM, four MPU 8-bit boards, one quad-density floppy-disk drive, and a 20-megabyte Winchester hard-disk drive. The 5000SX sells for $8195. For further information, contact IMS International, Division of L/F Technologies, 2800 Lockheed Way, Carson City, NV 89701, (702) 883-7611.

Inquiry 516.

PERIPHERALS

Doctoring Disk Drives

The Model 803 Alignment Scope uses liquid-crystal graphics-display technology to combine the features of an oscilloscope with a digital readout. It presents disk-drive alignment information on a solid-state display.

A wall-mount transformer powers the Model 803, which uses an 8085 microprocessor. The device works with all sizes of floppy disks and is self-calibrating.

The Model 803 has only six push buttons. It measures and displays all parameters necessary for alignment of a floppy-disk drive, including index pulse parameters, radial alignment (cat's-eye pattern), azimuth bursts, track average amplitude, index to burst time, and track 0 adjustment. The scope presents all measurements both pictorially and digitally.

The Model 803 Alignment Scope is $1195. For more information, contact Ava Instrumentation Inc., 8010 Highway 9, Ben Lomond, CA 95005, (408) 336-2281.

Inquiry 517.

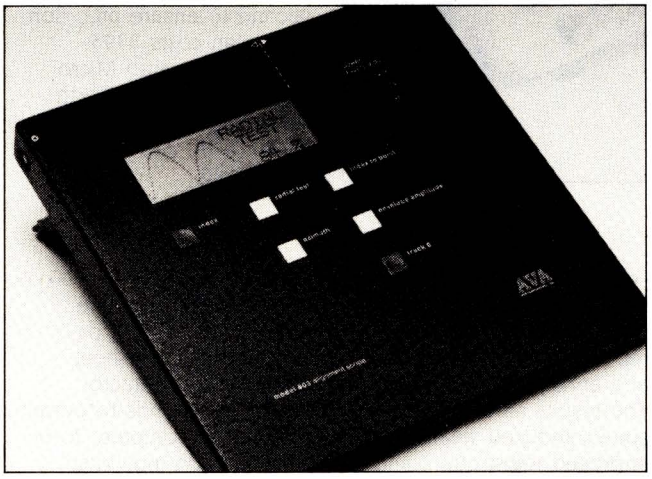

IBM PC AT Disk Drives for the PC and XT

A hardware and software package puts 1.2-megabyte IBM PC AT-compatible disk drives in the IBM PC and XT. The AT-compatible disks cut down on storage problems, eliminate disk swapping and disk-full errors, and let you back up a hard disk to only a few floppy disks.

The AT disk-drive package includes a Teac 1.2-megabyte half-height drive; a Teac 360K-byte half-height drive; a disk controller that supports up to four drives; a mounting bracket; and software to format, read, and write to 1.2-megabyte drives.

The basic two-drive package sells for $499. Contact Tall Tree Systems, Suite 124, 1032 Elwell Court, Palo Alto, CA 94303, (415) 964-1980.

Inquiry 518.

Power Strip Series

The Voltector Series 10 conditioned power strip protects computer equipment from power surges and high-frequency AC-line noise. Each receptacle is RF-isolated from the others and from the power line.

This power strip eliminates the need to plug pieces of equipment into separate outlets or to install a separate circuit for your computer. The unit is a solid-state, multistage, bidirectional, cooperative transient-voltage suppressor and high-frequency EMI/RFI noise filter. All models are circuit-breaker protected. They include a pilot light, master on/off switch, and 6-foot, heavy-duty, three-conductor line cord. They are rated 15 amps, 125 volts, 60 Hz, and 1875 watts continuous duty.

Four-outlet models cost $146.40, six-outlet models are $152.90, and eight-outlet models are $159.40. Contact Pilgrim Electric Co., 29 Cain Dr., Plainview, NY 11803, (516) 420-8989.

Inquiry 519.

(continued)

PERIPHERALS

Penman Robot Plotter

Penman is several peripherals in one: a three-color plotter, a high-resolution printer, a desktop turtle, a precision robot with collision detection, and a mouse. Penman connects to computers with an RS-232C interface. It has no controls; it automatically adjusts to its host computer.

The unit comprises two parts linked by a ribbon cable: the control box containing the electronics and a 5-inch-square robot that moves around on paper to produce graphics. Three built-in pen holders let the operator change pen color or thickness at any time, even in mid-line. Penman can draw perfect circles or straight lines in any direction.



To use Penman, you place any size of paper on a flat, horizontal surface. When the robot is set on the paper, it uses optical sensors to find the bottom left corner, which it uses as a point of reference. The robot also senses when the cable is twisted around it and automatically rotates to free itself.

The Penman robot moves at speeds up to 50 mm per second and achieves its accuracy by servo control of the drive motors. An 8-bit single-chip microcomputer performs the necessary calculations 1500 times per second to ensure precision.

Penman costs $395. Contact American Micro Products Inc., 705 North Bowser, Richardson, TX 75081, (214) 238-1815.

Inquiry **520**.

High-Speed Daisy Wheel

Primages' daisy-wheel printing system comprises the Primage 90 bidirectional printer and a choice of Pagemate sheet-feeder options. The Primage 90 performs at 90 cps and prints proportional, 10, 12, and 15 pitch. It also offers horizontal spacing in increments of 1/120 of an inch and vertical spacing at 1/96 of an inch.

The Primage 90's design innovations incorporate 10 patents for stepper-motor controller technology, use of a Teflon-coated lead screw to carry the daisy wheel, and sheet feeders with short, straight paper paths to avoid skewing.

Other featured technology includes "print in flight" (the printer does not have to start and stop the print head for each letter), a refined hammer assembly, and enhanced electronics. The results are increased speed, reduced wear, improved registration, and less noise than previous printers.

The Pagemate sheet feeders come in one-, two-, or three-bin models. Paper bins hold 150 to 200 sheets of 8½- by 11-inch paper loaded horizontally or vertically; another bin holds 30 envelopes. The sheet feeders are motor-driven (not friction-driven), with one motor to choose sheet A or B and a second motor to drive the envelope and eject the paper.

The Primage 90 printer is also available with a snap-on tractor feeder, and the operator can install or remove both the sheet feeder and the tractor feeder in seconds to permit printing on computer forms as well as on individual sheets.

The Primage printing system features RS-232C and Centronics interfaces. The Primage 90 printer with the Pagemate I single-sheet feeder sells for $1895; with the Pagemate II two-sheet feeder it costs $2095; and with the Pagemate III two-sheet plus envelope feeder the price of the printer is $2295.

For further information, contact Primages Inc., 620 Johnson Ave., Bohemia, NY 11716, (516) 567-8200.

Inquiry **521**.

Letter Quality with Dot-Matrix Versatility

Micro Peripherals' SX printer is a low-cost, letter-quality dot-matrix printer. It prints at 300 cps in draft mode, 71 cps in near letter-quality mode, and 52 cps in letter-quality mode. This printer also provides correspondence-quality documents.

The SX uses a 23- by 18-dot matrix to produce letter-quality print. In that mode, the printer can generate fonts with dot elements that overlap horizontally, vertically, and diagonally within the matrix.

In its IBM PC-compatible mode, it responds to IBM PC command sequences and prints the expanded character set. You use the SoftSwitch Keypad to switch from IBM to MPI operating mode and back. The SideWinder mode prints wide-column spreadsheets lengthwise on the paper. The SX prints the data at 12 cpi using a special font for sideways printing. (This feature requires MPI's 64K-byte buffer.) In Repeat mode, the printer receives the entire document and prints it up to 99 times.

The 18-key SoftSwitch Keypad lets you change the printer parameters without using software commands or changing DIP-switch settings. Accessible features include character densities, margins, form length, print quality, and modes.

The SX has 8 standard fonts and can access StyleWriter, a library of more than 40 additional fonts. A travel cover ($50) converts the SX to a portable printer. The SX is $795. Contact Micro Peripherals Inc., 4426 South Century Dr., Salt Lake City, UT 84123, (800) 821-8848; in Utah, (801) 263-3081.

Inquiry **522**.

ADD-INS

IBM PC Preview!

A monochrome display adapter for the IBM PC, PC XT, and PC AT is now available from AST Research. Preview! offers bit-mapped graphics compatible with popular business software packages.

The board occupies a single full chassis slot and has an IBM PC-compatible parallel-printer port. Preview! includes AST's SuperDrive RAM-disk simulator and SuperSpool print-spooler utilities to speed graphics file manipulation and graphics image printing.

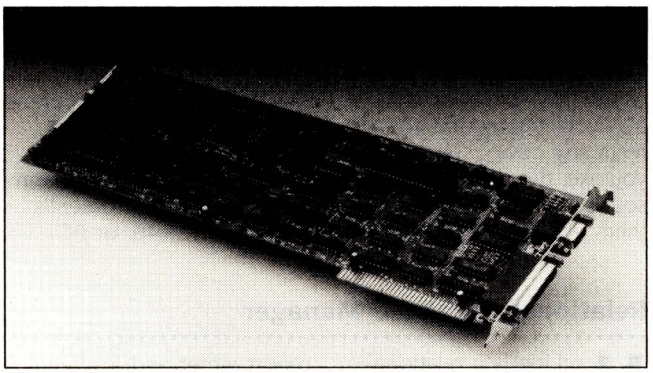

AST has priced the Preview! board at $399. Contact AST Research Inc., 2121 Alton Ave., Irvine, CA 92714, (714) 863-1333.
Inquiry 523.

Expanding the IBM PC AT

STB Systems recently released a memory-expansion board, Grande Byte, and a multifunction board, Rio Grande, for the IBM PC AT. Each 128K-byte board occupies one expansion slot.

Grande Byte gives AT users the additional memory necessary for multitasking programs or multiuser systems. The board provides extra memory for RAM disks and for handling large amounts of data. Parity-checked memory from 128K bytes to 2 megabytes is user-expandable with 64K- or 256K-byte memory chips. The board features split memory addressing that fills the AT's system memory to 640K bytes and continues memory expansion at 1 megabyte.

Rio Grande includes I/O expansion as well as memory expansion. Memory is user-expandable from 128K bytes to 1.5 megabytes with 64K- or 256K-byte chips. This board also uses split memory addressing. Rio Grande offers two IBM-compatible serial ports (one standard and one optional) for attaching a modem, serial printer, plotter, mouse, or other asynchronous communication devices. Its parallel port is a standard feature for connecting printers to the AT. An optional game port provides for graphics and recreation.

The Grande Byte is available for $395, and the Rio Grande sells for $495. Contact STB Systems Inc., Suite 125, 601 North Glenville, Richardson, TX 75081, (214) 234-8750.
Inquiry 524.

Electrohome Introduces NAPLPS Decoder

A peripheral card for on-board decoding of NAPLPS information is available from Electrohome Electronics. The IBM PC-compatible Quickpel is a single-board decoder with multitasking capabilities including telesoftware.

Quickpel conforms to the Service Reference Model (SRM) in its use of macros, a dynamically redefinable character set, full color mapping, logical pel, and unprotected fields. Features that exceed SRM requirements include complete text scaling, splines, automatic clipping on screen boundaries, 6K-byte dynamic memory that can be shared between macros, textures, and object memory management.

Display resolution is 256 by 200 pixels and the status line is 256 by 10 pixels. Quickpel provides a choice of 16 simultaneous colors from its 512-color palette. The board plugs into a single IBM PC slot and drives a color monitor directly or a standard TV through an optional RF modulator.

The manufacturer expects Quickpel to sell for approximately $750. Contact Electrohome Electronics Ltd., 809 Wellington St. N, Kitchener, Ontario N2G 4J6, Canada, (519) 744-7111.
Inquiry 525.

68000 Support for the IBM PC XT or AT

Language Resources offers an upgrade product, PC-68K, that supports 68000 family software development on the IBM PC XT or AT. The PC-68K comprises an IBM PC-compatible plug-in board, software on disks, and documentation.

The board, which acts as a 68000 execution vehicle, contains a 68000 processor, 256K bytes of high-speed RAM, and a memory-management subsystem. The disks contain the development tools: a 68000 macro assembler, a linker and locator, and a symbolic debugger. The symbolic debugger is for assembly-language and high-level language modules.

Optional Pascal and C compilers provide separate translation of C, Pascal, and MASM (meta assembler) modules. A host communication utility transfers binary and text files between the PC XT or AT equipped with PC-68K and an IBM VM-CMS, DEC, or VAX/VMS system running Language Resources' XDS-68 cross-software. Then you can download programs developed on the large system to the XT. With the emulator communication utility, you can connect several 68000 emulators to a PC XT or AT for integration.

The standard PC-68K system costs $2995. The high-level language compilers are $895 each. The host and emulator communication utilities cost $495 each. Contact Language Resources Inc., 4885 Riverbend Rd., Boulder, CO 80301, (303) 449-8087.
Inquiry 526.

(continued)

SOFTWARE • APPLE

A-One, A-Two . . .

Anyone with a basic knowledge of music notation can use the MusiCal Music Partwriting System (MPS) to create, edit, transpose, store, and print full-size sheet music. This program, which runs on an Apple II+ or IIe with two disk drives, a monitor, and a Super Serial Card, is designed to eliminate the tedious task of copying and transposing parts by hand. You don't have to learn any special commands or programming languages nor do you have to be able to play an instrument. MPS can create sheet music in any key or time signature, with proper beaming of notes, ties, triplets, and rests.

The Music Screenwriter, the system's intelligent editor, lets you input and delete music in the same way you input and delete characters with a word processor. The program monitors your typing and corrects any obvious errors. If you like, the computer will sound the notes as you type them. Any music you write can be stored on the program disk; later, you can print it out in original form or transpose it to a different key. An average sheet of music takes about 10 minutes to print; the system uses Houston Instrument's DMP-29, DMP-40, or PC digital plotters.

The price of $1495 gets you the software, key caps, plotter cable, and the $695 PC 695 plotter. Contact Newgo Inc., POB 430, Stephens City, VA 22655, (703) 869-1600.
Inquiry 527.

Relational Database Manager

MacLion is a relational database-management system for the Macintosh. Because MacLion is a true relational system, there is no limit to the number, range, or variety of data that may appear on the screen. Many relations can be combined to suit the user's need.

The program facilitates the handling of files and relations with two features: a report writer and a screen generator. The user can define a report or screen by clicking fields into position with the Mac's mouse, thus getting a preview of the screen or report. The screen generator has multifile capabilities for both inputting data into and drawing data from the database.

Features implementing the Mac's desktop metaphor have been incorporated in the language of MacLion. Applications developed under MacLion can use the Mac's mouse, pull-down menus, dialogue boxes, and programmable buttons.

MacLion costs $379. Contact Computer Software Design, 1911 Wright Circle, Anaheim, CA 92806, (714) 634-9012.
Inquiry 528.

Integrated Mac Pack

TimeBase, a business tool for the Macintosh, makes use of an overlapping windowed environment to provide five applications on a single disk: time management, information management, centralization, forms and letters, and a feature called TMP (tracking, maintaining, and planning). Virtually all commands and functions are generated with the mouse; the only time you need the keyboard is for data entry.

For those situations not requiring a stand-alone database, the program provides a fixed-field, limited database known as the File Cabinet, capable of storing up to 100 records. The File Cabinet has complete search and print capabilities.

Business forms and letters created with the package can be transferred to MacPaint for editing and customizing. TMP, the heart of this interactive system, lets you track multiple schedules, information flow, accounts payable and receivable, and equipment maintenance. The program can also handle records, billing cycles, and timely mailings.

TimeBase is available for both the 128K- and the 512K-byte Macintosh and will run on the Lisa under MacWorks. The suggested retail price is $149.95. Contact SoftDesign, POB 161377, Miami, FL 33116, (305) 253-5521.
Inquiry 529.

Business Software for IIc, IIe

The Business Accountant is a double-entry business accounting system that includes programs for general ledger, accounts payable and receivable, inventory, and payroll. These programs can be used together or separately and are designed for small and medium-sized businesses.

General Ledger lets you define the way a chart of accounts is set up and the manner by which data should be consolidated. Out-of-balance journal entries are not permitted. Accounts Payable can produce checks automatically; Accounts Receivable lets you review a customer's credit status at any time. Inventory Control tracks all inventory parts and produces reports for order recommendations.

The Business Accountant's Payroll system handles hourly, salaried, and commissioned employees on a weekly, biweekly, semimonthly, or monthly basis. The system also produces W-2 and W-3 forms and 940 and 941 reports and can handle up to 14 types of deductions. The System Manager is necessary to integrate any of the modules and includes a mailing-label system that can access the other modules for names and addresses.

The System Manager is $95. The Payroll package costs $345. The other modules are $295 each. Contact Manzanita Software Systems, Suite 200-A, One Sierra Gate Plaza, Roseville, CA 95678, (916) 781-3880.
Inquiry 530.

SOFTWARE • IBM PC

Database with Analysis

Designed to aid managers, researchers, and planners in the collection and interpretation of data, Reflex is a database software package that combines information management with analysis features. Information can be grouped and summarized in ways that reveal interrelationships, trends, and deviations.

Data can be organized in lists and tables, selectively extracted and displayed in charts and graphs, and summarized or combined using built-in financial, statistical, and mathematical functions. You can shift quickly between formats, or "views," and move from a detailed look at a particular record to a summation of information from many records.

Reflex has pull-down menus, screen windows, and help screens that can be accessed with one keystroke. It can hold up to 64,000 records on disk and more than 7000 records in its working database. Because the entire program and the data being worked on are stored in RAM, the system does not have to continually load and reload portions of the program from disk.

Reflex can accept information from several popular business packages, including dBASE II, Lotus 1-2-3, and DIF, as well as ASCII text files downloaded from mainframes and minicomputers or transferred from other microcomputers.

The package runs on the IBM PC and compatibles and requires 384K bytes of RAM and graphics capability. The suggested retail price is $495. For more information, contact Analytica Corp., 3155 Kearney St., Fremont, CA 94538, (415) 490-3643.

Inquiry **531**.

APL Programming Package

Pocket APL, an APL programming package for the IBM PC, PCjr, and compatibles, is designed to save development time by enabling users to execute multiple tasks in a single line. According to the vendor, the product lets you develop applications 4 to 10 times faster than with languages like BASIC or FORTRAN.

Features include full-screen capabilities, an on-line help facility, English-like keywords, report formatting, and error trapping. Additionally, Pocket APL can serve as an on-line calculator for number crunching and analysis. The package also provides an APL soft-character set for computers with a graphics board or color monitor; for machines with monochrome monitors there's a set of keywords.

STSC's Pocket APL has many of the capabilities of the company's APL*Plus. Purchasers of Pocket APL can upgrade to APL*Plus.

The program, which comes on one disk, operates with a minimum of 128K bytes of memory and either PC-DOS or MS-DOS. The system includes a textbook, reference guide, and keyword reference card. Contact STSC Inc., 2115 East Jefferson St., Rockville, MD 20852, (800) 592-0050; in Maryland, (301) 984-5123.

Inquiry **532**.

UNIX-Compatible Tool Kit

Lantech Systems has released a software developer's tool kit that's designed to enable an IBM PC to be used as a workstation in mainframe, minicomputer, and microcomputer environments. Retailing for $399, the Tool Kit contains a terminal emulator, windowing capability, and a choice of text editors (the Bell Editor, vi Editor, ed Editor, or an EMACS-like editor called Epsilon).

The Tool Kit also includes uNETix, a UNIX-compatible multitasking operating system developed by Lantech.

Developers can use the editor to write applications off line from the larger system, which frees up processor cycles. Once the code has been generated, it can either be uploaded to the larger computer for compilation or it can be compiled on the PC.

The Tool Kit can be operated in stand-alone mode or in conjunction with a host system.

The Lattice C-Compiler is offered as an option. With the compiler, the user can develop applications in a local mode, which eliminates the need for a UNIX host machine.

For more information, contact Lantech Systems Inc., 9635 Wendell Rd., Dallas, TX 75243, (214) 340-4932.

Inquiry **533.**

Text-Composition System

ScenicWriter/HP is a text-composition system that enables the IBM PC and PC XT to operate with Hewlett-Packard's LaserJet printer. ScenicWriter uses all of the laser printer's font cartridges, built-in fonts, and symbols. Graphics such as frames, screens, and simulated cursors can be placed anywhere on a page. Output from the printer is said to be camera-ready for publication.

With ScenicWriter, you can number chapter headings, sections, footnotes, and illustrations in order as each document is printed. The full-screen editor features nested editing, global search and replace, block copying, and a macro system. Any sequence of formatting commands can be collected into a macro command.

ScenicWriter sets text on the page in single- or multiple-column format. Dimensions can be specified to fit a page design. The package includes a 40,000-word spelling checker that accepts unlimited additions.

ScenicWriter is also available for PC-compatibles, Stride Micro computers, and versions are slated for the TI Professional and the DEC LSI/PDP series. The program is also available for other laser printers, phototypesetters, and daisy-wheel printers. The LaserJet version costs $995. Contact Scenic Computer Systems Corp., 14852 Northeast 31st Circle, Redmond, WA 98052, (206) 885-5500.

Inquiry **534**.

(continued)

SOFTWARE • CP/M/MS-DOS

Files Protected

Once a file is protected by For Your Eyes Only, Grebar claims, no one will be able to access it without the correct password. The program protects files created by any software running under MS-DOS, including dBASE II and dBASE III, VisiCalc, WordStar, Framework, RBase, and Lotus 1-2-3 files.

Grebar's data-encryption algorithm alters every byte of a file; the company says no utility can bypass this security measure. The algorithm employs a 560-bit encrypting code. According to Grebar, it would take a thousand Cray-1 supercomputers more than 4 billion years to generate all possible code combinations.

For Your Eyes Only can protect files on floppy or hard disks. You can re-encrypt a file up to 99 times with one run of the program and protect more than 100 files with the same password in a single operation.

Protected files are automatically hidden and do not appear in a normal directory listing. Only you know where they are stored.

You must enter an access code before an encrypted program will run, and illegal attempts to use the program or break into a file are recorded in a log that's accessible only to authorized users.

Minimum requirements are an IBM PC or Compaq with 192K bytes of RAM, one single-sided disk drive, and DOS 2.0 or later. For Your Eyes Only costs $150 (U.S.). For more information, contact Grebar, 2926-266 Graham Ave., Winnipeg, Manitoba R3C 4B5, Canada.
Inquiry **535**.

FORTH Interpreter

A FORTH interpreter optimized for MS-DOS and IBM PC machines, HS/FORTH includes utility files to read, write, and load standard MS-DOS files, standard screens, and screens mapped onto random-access files. Other utilities are segment management, graphics, string functions, a program editor, and 8087 floating-point arithmetic.

The assembler, which implements the complete 8088/8086 instruction set, can create new code primitives or complete stand-alone program files.

Users unfamiliar with assembly language can take advantage of an Auto-Opt utility to generate optimized machine code from FORTH source code. The assembler also supports 8087 and 80186 microprocessors.

According to the company, HS/FORTH can run the Sieve of Eratosthenes benchmark in 47 seconds. With Auto-Opt, the benchmark reportedly takes 9 seconds.

HS/FORTH requires 64K bytes, one disk drive, and PC-DOS or MS-DOS. The price is $250. Contact Harvard Softworks, POB 2579, Springfield, OH 45501, (513) 390-2087.
Inquiry **536**.

Disk Recovers Lost Data

A set of disk media utilities, U.T. Disk can restore deleted files on floppy disks and internal and external hard-disk subsystems. The product supports 64 DOS volumes. Clusters of an erased file assigned to another file can be restored unless the user has physically written over every byte of the original data.

In addition to restoring lost data, U.T. Disk provides diagnostic checking, sector editing, raw sector data searching, and file and subdirectory editing. Its Custom Volume Configuration feature lets a programmer change certain fixed attributes of a DOS volume, including the number of root entries or reserved sectors.

U.T. Disk is written in C and is menu-driven. It sells for $99. Contact Great Lakes Computer Peripherals Inc., Suite 245, 2200 West Higgins Rd., Hoffman Estates, IL 60195, (312) 884-7272.
Inquiry **537**.

MS-DOS Information Management

With RMI Profiler, an information-management system, you can "draw" input formats and report structures on the screen using standard keyboard entries. RMI Profiler accepts up to 80 fields and 2000 characters per record. It requires at least 128K bytes of memory. The price is $795 (Canadian). Contact Reality MicroSystems Inc., Suite 203, 103 Lakeshore Rd., St. Catharines, Ontario L2N 2T6, Canada, (416) 935-3032.
Inquiry **538**.

WHERE DO NEW PRODUCT ITEMS COME FROM?
The new products listed in this section of BYTE are culled from the thousands of press releases, letters, and telephone calls we receive each month from manufacturers, distributors, designers, and readers. The basic criteria for selection for publication are: (a) does a product match our readers' interests? and (b) is it new or is it simply a reintroduction of an old item? Because of the volume of submissions we must sort through every month, the items we publish are based on vendors' statements and are not individually verified. If you want your product to be considered for publication (at no charge), send full information about it, including its price and an address and telephone number where a reader can get further information, to New Products Editor, BYTE, POB 372, Hancock, NH 03449.

Free-Form Retrieval

You can retrieve all sentences or paragraphs relating to a specific topic, no matter how many files the topic is in, with a program called Electra-Find. The package, which runs on CP/M computers, is designed for writers, researchers, and anyone who uses a word processor to save information in text format.

After you've retrieved material, it's saved in a new file along with the name of the file the text was taken from. According to the developer, nearly any type of file can be searched, including database, word-processing, and binary files.

Electra-Find costs $50. Contact O'Neill Software, POB 26111, San Francisco, CA 94126, (415) 398-2255.
Inquiry **539**.

Micro Products

New Year Specials

Terms: We accept Visa, M/C, Pre-Pay by Check or Money Order. COD's are accepted by Telephone & Mail. COD Terms are: Cashier's Check for first time orders over $100.00

714 / 898-0840

We Cater to IBM™ Dealers
★ Hardware
★ Training Tapes
★ Software
Call for our Catalog now!

New Hayes SmartModem Compatible!

Finally a **price breakthrough** on a Hayes compatible, external 300/1200 baud modem. This low price is without driver software, but if you need it add **$25.00** Call for a 26 page catalog of our special deals. Look in this spot every month for Hot, New items sure to catch your interest.



- Runs the popular Hayes communications software
- FCC approved for direct RJ-11 connection.
- Manual & power supply included for this one low price.

MOD-8100-00 ..... **$229.00**

IBM PC-XT SELECTRIC KEYBOARDS

Our volume purchase of these excellent Selectric type keyboards will bring the features you have been wanting down to a price you can't resist. So many features - you'll love it!!

- Single key reset
- Separate numeric keypad
- Separate "Arrow" keypad
- Dimple marked "5", F, & J keys



KEY-1051-00 Selectric **$129.00**
KEY-1050-00 Standard **89.00***

ADD-ON POWER SUPPLY



Power Supply with Fan and Power Filter. Uses 140 watts, runs Hard Disk & Tape Back-Up.
IBM Replacement type for Hard Disk.
New High Velocity Fan!
New Low Price!
POW-1040-00 ..... **$129.00***

IBM STYLE MOTHERBOARDS



Two IBM-style Motherboards to choose from, 5-slot and 8-slot. Both expandable to 256K. 5-slot has two serial slots and one parallel.



BOA-6000-00 5-Slot **$395.00**
BOA-6058-00 8-Slot **$395.00**

POWER BACK-UP

Protect your Data with Datashield® in case of a Power failure. Datashield® is a battery operated, self-contained Power Generator which instantly supplies even uninterrupted AC Power to a Microprocessor in the event of a Power Drop or Outage. In addition provides Surge Protection, which filters and eliminates voltage spikes (surges) above 140 VAC.



PC-200 200 watts POW-2000-00 **$329.00**
PC-300 300 watts POW-2050-00 **$495.00**

Do it Yourself!

We think of this System as a "Do it Yourself" System. Start by choosing 5 or 8 Slots. Some of the standard Features: • 64K RAM expandable to 256K • 4 DMA Channels • Runs MS-DOS™ and CP/M-86™ (software not included) • Multi-function Keyboard & Cable • Hard Disk Ready Power Supply • Serial Ports • Parallel Ports • And MORE! ..... SYS-8000-00 **Only $525.00***



IBM type Case only
5 Slot CAB-3060-00 **$65.00***
8 Slot CAB-3075-00 **$65.00***

This is OUR Junior!

Use this *"Driveless"* workstation for low-cost Networking.
Features: • 4-slot IBM™ compatible Motherboard • 128K Standard Memory • 8088,8087 Math Co-processor • Optional Floppy Drive with Controllers.
SYS-8100-00 ..... **$475.00***
Full System w/Keyboard, Mono Monitor, Video Display Card, 128K RAM SYS-8725-00 **$895.00***



$1245* $1245* $1245* Complete System! XPC by XOR

NEW *IBM "AT" 1.2M Floppy In Stock - For your XPC! Can Read 3.0 or 2.1 DOS Formats!*
***OEM Qty 11+**



10 Meg H.D.
Complete System!
$1895.00*

20 Meg Color
Complete System!
$2375.00*

40 Meg w/Tape
Complete System!
$2845.00*

Software
- BASICX
- WORDX
- COMX

Standard Features:

- Full-Size, Feather-Touch, Capacitance Keyboard with 10 Function Keys and Calculator-Type Numeric Keypad
- Comes Standard with Parallel and Serial I/O
- 2-Slimline 5¼" DS/DD 48 TPI 360K Drives
- 8 IBM compatible expan. slots
- Operating System Software Rebate
- DOS BIOS on EPROM
- 256K parity checked RAM on Motherboard
- 8088 16-bit CPU
- 4 DMA & 3 Timer channels
- Up to 32K of EPROM (full 8K supplied)
- Supports PC-DOS - MS-DOS - CP/M-86
- Power Supply is Hard-Disk-Ready, no need to add-on additional power
- High resolution 12" Monitor with Green Screen - 18 MHz bandwidth

Add-On H.D. & Tape



10 Megabyte Irwin on the top, your choice of Hard Disk on the bottom. Super appearance! Requires one slot in your PC for SASI interface and an extension connector on the floppy card. Everything else is supplied by us.

10 Meg	**$1295***	**65 Meg**	**$2895***
20 Meg	**$1495***	**105 Meg**	**$3695***
40 Meg	**$1995***	**140 Meg**	**$4595***

Add-On Hard Disk

Two ways to go. The internal system is cheaper because it does not need a P/S & Chassis. The same P/S & Chassis can be used for a 10 Meg Tape Back-up on your XT!

10 Megabyte	**65 Megabyte**
$795 int/$995 ext	**$2495**
20 Megabyte	**105 Megabyte**
$1095 int/$1295 ext	**$3295**
40 Megabyte	**140 Megabyte**
$1595 int/$1795 ext	**$4195**

Add-On 10 Meg Tape



If your IBM-XT needs a little help in the Back-up category, you won't be able to beat this price! Cables, software and everything!
internal ... **$395.00***
SUB-8300-00 ..... **$495.00***

Not enough room here - Call for Catalog

January Dealer Honors



★★ **U.S. Telecom** ★★

U.S. Telecom's latest product, **PhoneMaster**, allows school administrators to store voice-mail messages, such as absence notifications to parents, in the same computer they use for other word/data processing, thus eliminating the need for separate, expensive, tape recorder-type dialing devices. **PhoneMaster** will deliver the stored, natural-sounding voice messages at programmed times, collects responses if desired, and print call progress reports. **PhoneMaster** can also be used as voice-bulletin board for parents to call for info on various school events and/or as an answering service for staff and faculty.

"J.J." Kelley says *"We have over 50 **XPC-XT Hard Disks** installed and working perfectly to date. We would like to take this opportunity to recommend to other Vertical Integrators the hardware and services of **Micro Products**."*

★ 611 W. 25th Street ★ Joplin, Missouri ★ **417 / 781-7000** ★

SUPER 12 PAK MULTI-FUNCTION

This one is loaded! Two (2) IBM™ compatible Joystick Ports, Real-Time Chronograph / Calendar with Battery Back-up, Parallel Port, RS232-C Serial Port, *64K to 384K of Parity-checked Memory, PrintSpool and RAM Disk Software. Supplied with 0K of Memory. BOA-8680-00 **$179.00**



*Additional 64K Memory Chips
ICC-7801-00 - (9) ..... **$ 35.00**

INTERNATIONAL ORDERS

Micro Products is ready to serve your needs in several countries. Each Office has Sales Literature, Local Pricing, Inventory and Technical Service available to support your needs. There are no problems with U.S. Export Forms.

HEAD OFFICE
Darryl R. Green
15392 Assembly Lane, Unit A
Huntington Beach, CA 92649
Phone: 71? / 898-0840
Telex 887841 XORDATA HTBH

TAIPEI OFFICE
Tony Lio
2F, 126, Roosevelt Rd., Sec. 3,
Taipei, Taiwan, R.O.C.
Phone: 396-9900 / 396-9910
Telex: 21140 SIGMALTD

ZURICH OFFICE
Cynthia Clark
Eidmahstrasse 36
CH 8032 Zurich
Switzerland
Phone: 1-69 3633
Telex: 816058 HKIN

MARACAIBO OFFICE
Jim Stevens
Av. 3F Esq. Calle 81
Centro Com. Maelga - Local #5
Maracaibo, Venezuela 4001-A
Phone: 061-913328
Telex: 62344 PEMIN

AUSTRALIAN OFFICE
8 Irwin Street, Bellevue
W. Australia 6056
Phone: 274-3701

CANADIAN OFFICE
- - PENDING - -

PROM LASER

This is the One! Our PROM Burner allows reading, storing-to-disk, recalling, and burning. Hi-speed alogrithmes burns 2764 in 45 seconds! Also handles 2716, 2732, 27128, 27256. **Features:** Zero insertion force sockets; On-board Voltage Generator; No Interference with normal computer operations.



BOA-8640-00 ..... **$199.00**

MISCELLANEOUS $ $ $ $ SAVERS

300 / 1200 Baud Modem w/PC Talk III Communications Software
BOA-8725-00 ..... **$289.00**
Add-On Memory, RAM Disk & Print Spooler BOA-8650-00 ..... **$149.00**
Color Graphics Card, 320 x 200 Res. Color, 640 x 200 Monochrome
BOA-8400-00 ..... **$245.00**
Monochrome Graphics Card, (1-2-3 compatible) 720h x 348v
BOA-8500-00 ..... **$155.00**
Clock Calendar Board, Parallel Port, fits in "short slot" w/battery Back-up
BOA-8700-00 ..... **$75.00**
XOR-500 Printer, Dot Matrix, 80 col., IBM Graphics compatible
PRI-5575-00 ..... **$495.00**
Monochrome Monitor, 18MHz bandwidth, composite input Green Screen
MON-1000-00 Green ..... **$ 99.50**
MON-1010-00 Amber **$114.50**
Floppy Controller, Controls up to four drives, 5¼" 48/96 TPI
BOA-6100-00 ..... **$95.00**
Hard Disk Controller, standard ST-506 interface for DOS 1.1 & 2.0
BOA-8050-00 ..... **$245.00**

Inquiry 231

► **Micro Products • 15392 Assembly Lane • Huntington Beach, CA 92649 • 714/898-0840** ◄

California Digital

17700 Figueroa Street ● Carson, California 90248

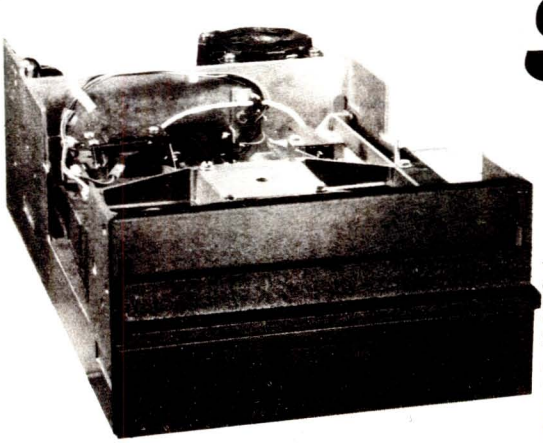

Shugart $159

The Shugart 801R has long been the standard by which all other eight inch disk drives have been judged. The 801R has historically been used by thousands of quality conscious equipment manufacturers because of their extremely high degree of reliability.
These units are current production, rack mountable LSI technology. The drives are identical to drives currently sold by distributors at $600.
California Digital has aquired these NEW units as a result of a change of marketing strategy of the A.M. Jaquard Corporation. This is the best value that has ever been offered on any Shugart eight inch disk drive. SHU-801R



FREE

Plastic library case supplied with all diskettes purchased from California Digital.

DISKETTES $16.50

FIVE INCH SINGLE SIDED DOUBLE DENSITY

	Soft Sector / Ten Sector / Sixteen	Each box	10 Boxes	100 Boxes
CAL DIGITAL	CAL-501 / CAL-510 / CAL-516	16.50	14.95	13.50
SCOTCH	MMM-744/0 / MMM-744/10 / MMM-744/16	22.95	21.75	20.75
VERBATIM	VRB-525/01 / VRB-525/10 / VRB-525/16	22.95	21.75	20.75
MEMOREX	MRX-3481 / MRX-3483 / MRX-3485	19.95	18.75	17.85
MAXELL	MXL-MD1 / MXL-MH1/10 / MXL-MH1/16	22.95	21.75	20.75
DYSAN	DYS-104/1D / DYS-107/1D / DYS-105/1D	32.25	31.00	29.75

FIVE INCH DOUBLE SIDED DOUBLE DENSITY

CAL DIGITAL	CAL-551 / CAL-561 / N/A	19.95	18.75	17.85
SCOTCH	MMM-745/0 / MMM-745/10 / MMM-745/16	29.95	27.95	24.75
VERBATIM	VRB-550/01 / VRB-550/10 / VRB-550/16	29.95	27.95	23.75
MEMOREX	MRX-3491 / MRX-3493 / MRX-3495	27.95	26.75	24.25
MAXELL	MXL-MD2 / MXL-MD2/10 / MXL-MD2/16	27.95	25.95	24.25
MAXELL / HD	MXL-MD2/96 / N/A / N/A	CALL		
DYSAN	DYS-104/2D / DYS-107/2D / DYS-105/2D	42.50	40.50	35.50
DYSAN / 96	DYS-204/2D / N/A / N/A	49.95	47.95	45.75

EIGHT INCH SINGLE SIDED SINGLE DENSITY

SCOTCH	MMM-740/0	28.50	27.50	23.80
MEMOREX	MRX-3062	27.75	26.60	22.25
VERBATIM	VRB-34/9000	31.50	29.50	25.60
DYSAN	DYS-3740/1	35.75	32.75	29.75

EIGHT INCH SINGLE SIDED DOUBLE DENSITY

SCOTCH	MMM-741/0	33.95	31.75	29.15
MEMOREX	MRX-3090	31.95	27.75	26.15
VERBATIM	VRB-34/8000	35.25	33.25	28.75
DYSAN	DYS-3740/1D	40.75	38.75	32.25
MAXELL	MXL-FD1	45.50	39.75	35.15

EIGHT INCH DOUBLE SIDED DOUBLE DENSITY

SCOTCH	MMM-743/0	45.95	43.25	37.50
MEMOREX	MRX-3102	37.95	36.75	31.50
VERBATIM	VRB-34/4001	41.75	37.50	32.25
DYSAN	DYS-3740/2D	54.65	49.75	40.50
MAXELL	MXL-FD2	52.50	48.75	40.45

QUME DT8 $319



These Qume DT8/842 disk drives are NEW double sided units acquired from the excess inventory of a major computer manufacturer.

Five Inch Winchester Hard Disk Drives

	One	Two
FUJITSU M2235AS 27 Meg.	999	959
RODINE RO-208 53 Meg.	1589	1493
MAXTOR XT1065 65 Meg.	1995	1965
SHUGART 712 13 Meg. ½ Ht	795	765
SHUGART 604 6.7 Meg.	159	149
TANDON 502 10 Meg.	419	395
TANDON 503 19 Meg.	795	775

Upon request, all drives are supplied with power connectors and manual

MEMORY

4164 DYNAMIC MEMORY 150ns $3.95



DYNAMIC MEMOR

		1-31	32 +	100 +
4116 150ns. 16K	ICM-4116 -3	1.75	1.65	1.45
4116 200ns. 16K	ICM-4116 -2	1.75	1.65	1.45
4164 150ns. 64K 128 refresh	ICM-41641 -2	3.95	3.40	3.25
41256 150ns. 256k	ICM-41256150	18.95	17.50	14.75
4228 for IBM/AT	ICM-4128150	18.95	17.50	14.75
DP8409 dynamic controller	ICT-8409	39.00	35.00	29.00
STATIC MEMORY				
21L02 200ns. 1K static	ICM-21L02200	1.49	1.29	1.15
21L02 450ns. 1K static	ICM-21L02450	1.29	1.15	.99
2112 450ns. 2K static	ICM-2112450	2.99	2.85	2.75
2114 300ns. 1K x 4	ICM-2114300	1.95	1.85	1.75
4044TMS 450ns. 4K x 1	ICM-4044450	3.49	3.25	2.99
5257 300ns. 4K x 1	ICM-5257300	2.50	2.25	1.99
6116 P4 200ns. 2K x 8	ICM-6116200	3.95	3.85	3.70
6116 P3 150ns. 2K x 8	ICM-6116150	4.55	4.35	4.15
EPROMS				
2708 450ns. 1K x 8	ICE-2708	4.95	4.75	4.55
2716 450ns. 2K x 8	ICE-2716	4.50	4.25	3.97
2716TMS 450ns. Tri-voltage	ICE-2716TMS	7.95	7.65	7.25
2732 450ns. 4K x 8	ICE-2732	4.50	3.75	3.55
2764 350ns. 8K x 8	ICE-2764	5.95	5.75	6.25
27128 350ns. 16K x 8	ICE-27128	18.95	16.75	15.25



$129 Your Choice TEAC 55B 55F 48TPI·96TPI

Five Inch Single Sided Drives

	One	Two	Ten
SHUGART SA400L full height	189	179	175
TANDON TM100-1 full height	99	95	79

Five Inch Double Sided Drives

TEAC FD55B half height	139	135	129
TEAC FD55F 96 TPI, half ht.	139	135	129
REMEX RFD480 ⅔ ht. IBM/PC	39	39	35
CONTROL DATA 9409 PC	169	159	155
CONTROL DATA 9428 ½ ht.	119	115	109
SHUGART SA455 Half Height	139	135	129
PANASONIC JA551/2N (455)	139	135	129
SHUGART SA465 ½ Ht. 96TPI	239	229	219
TANDON 100-2 full height	169	165	169
TANDON 101-4 96TPI full ht.	329	319	305
MITSUBISHI 4851 half height	159	149	145
MITSUBISHI 4853 96/TPI½ Ht.	169	159	155
MITSUBISHI 4854 8" elec.	395	385	375
QUME 142 half height	219	205	199

REMEX DOUBLE SIDED $219



Eight Inch Single Sided Drives

SHUGART 801R	159	159	154
SIEMENS FDD 100-8	129	125	119
TANDON 848E-1 Half Height	369	359	349

Eight Inch Double Sided Drives

SHUGART SA851R	495	485	475
QUME 842 "QUME TRACK 8"	319	319	313
TANDON 848E-2 Half Height	459	447	435
REMEX RFD-4000	219	219	209
MITSUBISHI M2894-63	447	439	433
MITSUBISHI M2896-63 ½ Ht.	459	449	409

ENCLOSURES

California Digital manufactures an asortment of stock and custom disk drive enclosures. If the volume is justified we will custom design an enclosure for your application. The following stock disk drive enclosures are available. All include power supplies the 8" enclosures are supplied with exhaust fans.

- Horizontal mount dual 8" full height drives. $279.00
- Vertical mount dual full height 8" drives. 299.00
- Horizontal mount one full height or two half height 8". 239.00
- Horizontal one full height or two half height 5¼". 89.00

VISA

Shipping: First five pounds $3.00, each additional pound $.50.
Foreign orders: 10% shipping, excess will be refunded.
California residents add 6½% sales tax. ● COD's discouraged.
Open accounts extended to state supported educational institutions and companies with a strong "Dun & Bradstreet" rating.

master charge

California Digital

7700 Figueroa Street • Carson, California 90248

NEC RGB COLOR MONITOR $259



he NEC JC-1401D is a 13" medium/high resolution RGB monitor uitable for use with the Sanyo MBC-550/555 or the IBM/PC. The ionitor features a resolution of 400 dots by 240 lines. Colors available re Red, Green, Blue, Yellow, Cyan, Magenta, Black and White. hese monitors are currently being used in applications far more ritical than microcomputers.
he NEC monitor carries the Litton-Monroe label and was originally cheduled for use in their "Office of the Future" equipment. A change Monroe's marketing strategy has made these units excess inven- ory which were sold to California Digital. We are offering these prime new" RGB monitors at a fraction of their original cost. Sanyo com- atible NEC-1401/S; IBM/P/C Computer compatible NEC-1401/PC

TRIAL OFFER

1200 BAUD MODEM



The Team 212A offers all the features of the Hayes Smart Modem 1200 for a fraction of the price. Now is your opportunity to purchase a 1200 baud modem at the price of a 300 baud modem.
California Digital is so confident of your complete satisfaction that we will allow the return the Team 212A and apply the full credit towards the purchase of any other 1200 baud modem. TEM-SM1200

$229

MONITORS

MC 12A green phosphor 15 MHz composit video	BMC-12A	78.95
MC 12" high resolution, 20MHz	BMC-12EN	119.00
ndek 300G 12" green phosphor	AMK-300G	128.95
ndek 300A 12" amber phos.; hi-resolution	AMK-300A	138.95
ndek 310A designed for IBM-PC, amber	AMK-310A	158.95
enith ZVM122 Amber Phosphor 12" 40/80 column switch	ZTH-122	89.95
enith ZVM123 green phosphor 12" 40/80 column switch	ZTH-Z123	89.95
EC JB1201 green phosphor 18 MHz composit video	NEC-JB1201	159.00
EC JB1260 commercial grade composit	NEC-JB1260	119.00
onrac 9" open frame requires horz sync. & 12v. supply	CON-BW9	59.00
COLOR		
EC JC1401D Medium/High 13" RGB	NEC-1401/X	259.00
MC AU9191U Color composit video with sound	BMC-9191	238.95
MC 9191M RGB designed for use with the IBM computer	BMC-9191M	379.00
EC JC1203DM, RGB color monitor	NEC-1203	699.00
EC JC1215 color composit	NEC-JC1215	339.00
enith ZVM135 RGB & composite suitable for IBM PC	ZTH-Z135	475.00
mdek Color I 13" composit video	AMK-100	299.00
mdek Color II +, 13" RGB hi-resolution	AMK-200	419.95
mdek Color III +, 13" RGB, medium resolution	AMK-300	359.95
Princeton HX 12 RGB IBM/PC compatible	PRN-HX12	478.95

PRINTERS

MATRIX PRINTERS

tar Gemini-10X 120 char/sec	STR-G10X	259.00
tar Gemini-15X, 100 char./sec. 15" paper	STR-G15X	365.00
tar Gemini Delta 10, 160 Char/sec	STR-D10	399.00
tar Coex 80FT friction & tractor	VST-C80FT	179.00
oshiba P1351, 192 char/sec. letter quality	TOS-1351	1495.00
kidata 82A serial & parallel 9½" paper	OKI-82A	329.00
kidata 92A parallel interface, 160 char/sec.	OKI-92A	399.00
kidata 83A & parallel 15" paper	OKI-83A	559.00
kidata 84A & parallel 15" paper	OKI-84A	929.00
pson RX-8010 120 Char/sec.	EPS-RX80	259.00
pson FX80, 10" 160 char./sec. with graphtrax	EPS-FX80	439.00
pson FX-100 15" 160 char./sec. with graphtrax	EPS-FX100	629.00
pson LQ1500, 15" corespondence quality	EPS-LQ1500	1179.00
pson JX80 Color printer	EPS-JX80	579.00
nadex 9501B high speed with graphics	ADX-9501B	1029.00
nadex 9620B 200 char/sec. par\& serial	ADX-9620B	1129.00
Prowriter 8510 parallel 9½" paper	PRO-8510P	359.00
Prowriter II, parallel 15" paper, graphics	PRO-2P	689.00
Dataproducts B-600-3, band printer 600 LPM.	DPS-B600	6985.00
Printronix P300 high speed printer 300 lines per minute	PTX-P300	3995.00
Printronix P600 ultra high speed 600 lines per minute	PTX-P600	5795.00

WORD PROCESSING PRINTERS

NEC7710 55 char/second, serial interface	NEC-7710	1795.00
NEC7730 55 char/sec. par\ interface	NEC-7730	1795.00
NEC3550 popular printer designed for the IBM/PC	NEC-3550	1599.00
NEC2050 designed for IBM/PC 20 char/sec. par\	NEC-2050	995.00
Silver Reed EXP500, 14 char/sec. par\ interface	SRD-EXP500	459.00
Silver Reed EXP550 17 Char/sec par\ interface.	SRD-EXP550	659.00
Diablo 630 40 char/sec serial	DBL-630	1765.00
Diablo 620, proportional spacing, horz & vert. tab. 20 cps.	DBL-620	775.00
Juki 6100, 18 char./sec. SPECIAL	JUK-6100	429.00
Brother HR1A serial interface	BTH-HR1S	695.00
Starwriter F10 serial, 40 char/sec.	PRO-F10S	1125.00
Starwriter F10 parallel, 40 char/sec	PRO-F10P	1125.00
Comrex CR2, 5k buffer, proportional spacing, par\	CRX-CR2P	495.00

TERMINALS

Freedom 100, split screen, detatchable keyboard	LIB-F100	495.00
Qume 102 green phosphor terminal	QUM-102	539.00
Ampex Dialogue 125 green screen,	APX-D125G	675.00
Ampex Dialogue 175 amber screen, two page, func. keys	APX-D175A	719.00
Wyse 50, 14" green phosphor	WYS-50	595.00
Wyse 300, Eight color display, split screen	WYS-300	1159.00
Zenith 29 terminal, VT52 compatible detatch.ble keyboard.	ZTH-Z29	765.00
Televideo 910 Plus, block mode	TVI-910P	575.00
Televideo 925, detatchable keyboard, 22 function keys	TVI-925	759.00
Televideo 950, graphic char., split screen, 22 func.	TVI-950	950.00
Televideo 970, 14" green, 132 column, European	TVI-970	1095.00

MODEMS



$319

The CTS212AH Modem is 300/1200 Auto Answer/Auto Dial. Hayes Compatible. Mycroft Labs Companion communications software $35.00 additional

CTS 212AH 1200 baud, auto dial	CTS-212AH	319.00
Signalman Mark 12, 1200 baud, Hayes compatible	SGL-MK12	259.00
Signalman Mark 1, direct connect with terminal cable	SGL-MK1	75.00
Hayes Smart Modem 1200 baud, auto answer, auto dial	HYS-212AD	479.00
Hayes 1200B for use with the IBM/PC, 1200 baud.	HYS-1200B	429.00
Hayes Smartmodem, 300 baud only, auto answer, auto dial	HYS-103AD	229.00
Hayes Micromodem II, 103 Apple direct connect	HYS-MM2	279.00
Hayes Chronograph, time & date	HYS-CHR232	199.00
Prometheus 1200 super features	PRM-P1200	359.00
Prometheus 1200B internal PC	PRM-P1200B	279.00
Team 1200 Hayes Compatible	TEM-SM1200	229.00
U.S. Robotics 212A 300/1200 baud, auto dial/answer	USR-212A	439.00
U.S. Robotics Password 300/1200 baud	USR-PW212	389.00
Penril 300/1200 industrial quality	PEN-12AD	595.00
Universal Data 103LP, line power, answer & originate	UDS-103LP	169.00
Universal Data 202, 1200 baud, half duplex only	UDS-202LP	219.00
Universal Data 212LP, full 1200 baud duplex, line power	UDS-212LP	359.00
Novation J Cat, direct connect, auto answer	NOV-JCAT	115.00

OLYMPIA Computer Printer and Typewriter



As low As **$339**

The Olympia Corporation has just released two new typwriters with built in Centronics printer interface. These word processing printer are the ideal answer to your personal correspondence needs. The Compact 2 pictured above prints at 14 characters per second and is priced at $459 OLY-C2. The Orbit XP prints at 10 characters per second and is priced at only $339 OLY-XP1. Both machines are equiped with 2 K/byte printer buffers.

IBM PC with Controller $1099



AST $219 SIX PAK PLUS

AST SixPackPlus		zero memory	$219.00
AST SixPackPlus	384K	fully populated board	399.00
AST MegaPlus II	64K	to 512K with MegaPak	265.00
AST MegaPak	256K	piggyback / MegaPlus	265.00
Quadboard	64K	with six functions	249.00
STB RIO Plus	64K	with PC accelerator	279.00
STB Super I/O		serial/par'l/game port	184.99

AST Monograph Plus	monochrome/graphic	449.79
Hercules Graphic	two year warranty	339.89
Hercules Color Card	new from Hercules	189.89
PC Peacock Color	mono. RGB, graphics	229.00
Quad Color I	expandable, high res.	209.75
STB Graphics Plus	with software	379.67

4164 Memory Chips	150 or 200 ns	3.95
64K Set (9 chips)	with instructions	34.95
8087 CoProcessor	arithmetic chip	119.00

Shugart 604 WINCHESTER $159



These 6.7 Megabyte drives are new units recently released by the Shugart division of Xerox.
The Shugart 604 is fully 506 industry compatible. Each drive is tested before shipment and is supplied with a 90 day warranty. SHU-604

DOUBLE SIDED REMEX DISK DRIVES $39



The Remex drive is suitable for IBM/PC and all other applications requiring double sided Tandon 100-2 compatibility. The units are ⅔ the height of a standard disk drive and will allow three Remexs to fit in the space of two standard height drives. All drives are new factory packed units. RMX-480

TOLL FREE ORDER LINE
(800) 421-5041

TECHNICAL & CALIFORNIA
(213) 217-0500

CCT-4 SYSTEM SERIES

The latest CCT implementation of the new generation Intel 16-Bit Processor technology. This means extreme speed, unequaled power, and the ultimate in reliability, and of course, the innovators at CCT behind it.

This series in the CCT line exploits the speed and power of the Intel 80286 and Zilog Z-80H (8MHz), on the 286Z CPU board. This combination, along with CompuPro DMA controllers and I/O boards, yields a dramatic improvement in system throughput speeds, from basic CP/M operation, up to large powerful multi-user/multi-tasking machines. The CCT-4 represents the most advanced hardware presently available in a microcomputer to run the thousands of CP/M type software programs on the market, and with CONCURRENT DOS 8-16 and the CompuPro PC Graphics board (when available), all software written for the IBM PC machines. This series is for the serious business/scientific user.

CCT-4A State-of-the-art power in it's basic form. Consists of CCT-286Z CPU board and CCT-M256 (256K), along with CompuPro: Enclosure 2 Desk (21 slot MF), Disk 1A, System Support 1, Interfacer 4, the CCT-2.4 floppy drive system, and CP/M 80 and CP/M 86, and with Surgefree SF-200 surge suppressor system. **$5,995.00**

CCT-4B Single-user/hard disk power. As the 4A, except priced without the CCT-2.4, to add in your choice of CCT hard/floppy combination drive subsystem, at the published pricing. **$4,895.00**
(Example: CCT-4B Mainframe with CCT-10/1 = $7,244.00) Plus cost of selected drive subsystem

CCT-4C Multi-user/hard disk power. As the 4B, with the CCT-M512 (512K static RAM board) instead of M256; Interfacer 3 instead of Interfacer 4; Surgefree SF-400 instead of SF-200, plus MP/M 8-16 operating system. (6 user system) **$6,695.00**
(Example: CCT-4C Mainframe with CCT-40/1 = $10,044.00) Plus cost of selected drive subsystem

CCT BONUS ON 4C: FREE CONCURRENT DOS UPDATE!

NEW RAM BOARD

The above systems include all necessary cabling, assembly, testing, minimum 20 hour burn-in, and the CCT unconditional 12 month direct warranty.

CCT-M512 CCT introduces it's 512K static RAM board. IEEE Standard 12MHz. 512K in one slot! **Introductory Price: $2,249**
CCT-M256 256K version of M512 upgradeable to full 512K. Perfect 256K RAM board for any CompuPro system **$1,149**

CUSTOM COMPUTER TECHNOLOGY / BOX 4160 / SEDONA, ARIZONA 86340
TOLL FREE ORDERING: 800-222-8686 / For technical support / service: 602-282-6299

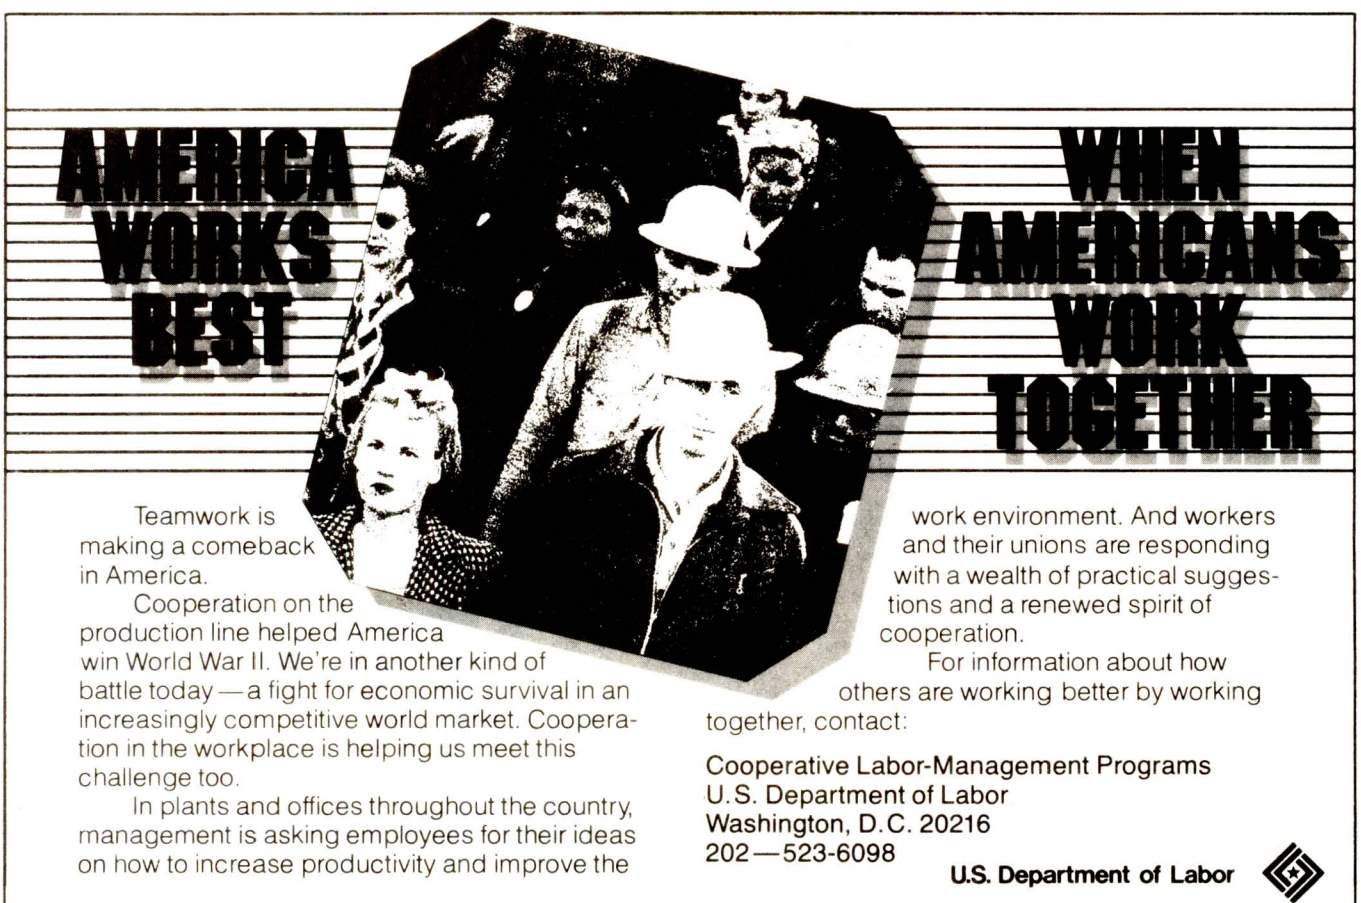

Teamwork is making a comeback in America.

Cooperation on the production line helped America win World War II. We're in another kind of battle today—a fight for economic survival in an increasingly competitive world market. Cooperation in the workplace is helping us meet this challenge too.

In plants and offices throughout the country, management is asking employees for their ideas on how to increase productivity and improve the work environment. And workers and their unions are responding with a wealth of practical suggestions and a renewed spirit of cooperation.

For information about how others are working better by working together, contact:

Cooperative Labor-Management Programs
U.S. Department of Labor
Washington, D.C. 20216
202—523-6098

U.S. Department of Labor

TOLL-FREE ORDERING: 800-222-8686

FOR TECHNICAL SUPPORT/ SERVICE / IN ARIZONA: 602-282-6299

CCT® CUSTOM COMPUTER TECHNOLOGY

1 CCT PLAZA — P.O. BOX 4160 — SEDONA, ARIZONA 86340

Purchase your Hardware and Software directly from an OEM / Systems Integrator. Take advantage of our buying power! We stock a full line of Board Level Components, Software and Peripherals. Call for your needs. We'll give you the Lowest Prices, and the Technical Support and Know-How we are quickly becoming well-known for. Satisfied Customers Nationwide. The Nation's Custom Systems House for Business, Education and Science. Call for a system quote. CCT implements tomorrow's technology today!

• FOREMOST QUALITY • ADVANCED SUPPORT • REASONABLE COST •






CCT©
CompuPro®

80286 NOW!

☐ **CCT-286Z** is our model designation for the **MI-286** dual processor board from **Macrotech.** It features the super high speed combination of Z-80H and 80286, with provision for the 80287 math chip. Directly replaces 8085/88 and 8086 CPUs running CP/M, MP/M Concurrent DOS, and MS-DOS, at throughput increases of 3X to 5X!

SPECIAL PRICE - $1099
80287 Option - Installed - **$395**

SEE THE CCT-4 SERIES USING THIS BOARD DETAILED ON THE FACING PAGE

• 8" CP/M SOFTWARE SPECIALS •

dBASE II - Latest Version 2.4 . . . . . **$349**
Supercalc 86 . . . **$99**☐Supercalc 2 . . . **$259**
Wordstar . . . . . **$279**☐Pro-Pak **$379**
DRI CBASIC Compiler 80 . . **$389**☐86 . . **$449**
DRI Pascal Compiler 80 . . **$279**☐86 . . **$449**
DRI GSX-86 **$79**☐Assembler Tools/RMAC **$179**
Microsoft BASIC . . . **$299**☐Compiler . . . **$339**
Supersoft FORTRAN IV . **$339**☐C Comp . **$399**

• TOP SELLING PERIPHERALS •

Wyse Terminals . . . . . **-DROPPED-**

LIBERTY TERMINALS
• Superior Reliability •

100-12" GREEN-25 X 80 . . . . . $399
110-14" GREEN-80/132 Column $499
200-14" GREEN-80/132 Super Deluxe . $569
220-14" GREEN-DEC Compatible $699
CCT RECOMMENDS—
AMBER Screen Options $20

OKIDATA PRINTERS - Top Quality
82 - 80 Col . . . **$329** **83** - 132 Col . . . **$619**
92 - 80 Col . . . **$429** **93** - 132 Col . . . **$659**
84 - 132 Col/200cps—Top of the Line . **$799**
For Serial Interfaces — Add $100

DIABLO — Letter Quality Series
Model 620 . . **$969** **Model 630** . . **$1799**

INDUSTRIAL GRADE SUPERIOR QUALITY **CCT DISK DRIVE SYSTEMS** **ROLLS ROYCES OF THE INDUSTRY**

S-100 HARD DISK SUBSYSTEMS

Professionally engineered ST-506 type systems for the business market S-100 Computer user. Includes industry top quality drives, CompuPro Disk 3 DMA controller, all cabling, A&T, formatted, burned-in. Provisions for up to two hard disks in each system. We include operating system update. CP/M 80, CP/M 86, CP/M 8-16, MP/M 8-16, CP/M 68K. (/1 Systems are CCT innovated hard/floppy combinations, with Mitsubishi DSDD 8" drive.) 12 month warranty.

CCT-10 (11 + MEG)	**$1799**	CCT-10/1	**$2349**
CCT-20 (22 + MEG)	**$2319**	CCT-20/1	**$2869**
CCT-40 (36 + MEG)	**$2799**	CCT-40/1	**$3349**
CCT-60 (58 + MEG) (New)	**$3999**	CCT-60/1	**$4549**
CCT-90 (87 + MEG) (New)	**$5209**	CCT-90/1	**$5759**
CCT-125 (123 + MEG) (New)	**$6399**	CCT-125/1	**$6949**

Drive capacities shown are **after** formatting! We are working on tape cartridge back-up units.

FLOPPY SYSTEMS

CCT-2.4 • Dual 8" DSDD
Mitsubishi 2.4 Megabyte in Extra Heavy horizontal enclosure, removeable filter air system, all cabling, A&T, Burned in. The fastest system available: **$1229**

CCT-5 • 5¼" DSDD
IBM Compatible Tandon 320K. Extra Heavy Cabinet accommodates two drives, hard or floppy. All cabling, A&T, Burned-in. Perfect for our MS-DOS Package **$399**

★ SUPER PRICES ★ COMPUPRO COMPONENTS ★ IN STOCK ★

CCT-2 - **$6799** • CCT-3 - **$6699** • Disk 1A w/CP/M - **$619** • CPU 8086/87 - **$819** • M-Drive/H - **$1099**
CPU 8085/88 - **$349** • CPU 8086 - **$559**/10Mhz - **$599** • **CPU 68K - $519**/10Mhz - **$639**
CPU-Z - **$249** • Disk 1A - **$519** • Disk 3 - **$499** • RAM 23/64K - **$309**/128K - **$599** • RAM 21 (128K) - **$749**
★ RAM 16 CLOSE-OUT SPECIAL - $249 ★
RAM 22 (256K) - **$1179** • Interfacer 3 - **$499** • Interfacer 4 - **$349** • System Support 1 - **$329**
Enclosure 2 Desk - **$649**/Rack - **$699** • CP/M 80 (CCTHMX) - **$125** • CP/M 86 (CCTTMX) - **$175**
CP/M 8-16 (CCTTMX) - **$199** • MP/M 8-16 (CCTSX) - **$499** • CP/M 68K (CCTCX) - **$279**

16 Bit Upgrade Kit: CP/M 86, RAM 16, System Support 1, Cable $709 ☐ CP/M 8-16 - Kit - $733

Operating System Updates/Remakes - $30
• FREE CONCURRENT DOS 8-16 UPGRADE (WHEN AVAILABLE) WITH PURCHASE OF MP/M 8-16 •

CCT-1 — ENTRY LEVEL S-100 BUSINESS SYSTEM

• Enclosure 2-Desk-20 Slot Mainframe •
• CPU 8085/88 - 6Mhz 8085/8Mhz 8088 •
• Disk 1A - DMA Floppy Disk Controller •
• RAM 16 - 64K Static RAM - 12Mhz •
• Interfacer 4 - 3 Serial/2 Parallel I/O •
• CCT-2.4-Dual 8" Mitsubishi DSDD Drive System - 2.4 Megabytes •
• CP/M 80 - 2.2 HMX - CCT Modified •
• All Cabling, Complete CCT Assembly, Testing, and Minimum 20 Hour Burn-in •

SPECIAL PRICE
$3,559

RUNS ALL STANDARD 8" CP/M SOFTWARE - INCLUDES OUR EXCLUSIVE 12 MONTH DIRECT WARRANTY

Prices & availability subject to change. All products new, and carry full manufacturer's warranties. Call for catalog. Free technical help to anyone. All products we sell are CCT individually tested and set up for your system - Plug-In & Go! Arizona residents add sales tax **CCT**® Trademark — Custom Computer Technology; **MS-DOS**® Trademark — Microsoft; **IBM**® Trademark — International Business Machines; CompuPro® Trademark — W.J. Godbout; **CP/M**® **MP/M**® Trademarks — Digital Research

SUNTRONICS CO.,INC.

12621 Crenshaw Blvd., Hawthorne, CA 90250

1-800-421-5775 (Order Only)
(213) 644-1140 (CA. Order & Inf.)
STORE HOURS :
Mon.-Fri. 9 a.m. to 6 p.m.
Sat. 10 a.m. to 5 p.m.

NEW BRANCH STORE IN ORANGE COUNTY, CALIFORNIA : 17552 BEACH BLVD., #C, HUNTINGTON BEACH, CA 92642 (714) 842-1948

IBM® XT Compatible Products

FEATURES:
- Intel 8088 CPU
- Intel 8087 Math Co-Processor (Option)
- Expandable on-board to 256K
- 128K RAM w/Parity
- 8 IBM Compatible Expansion Slots
- 4 Channel DMA 8237
- 8 Channel Interrupt 8259
- Mother Board dimension same as IBM PC

- ☐ Mother Board w/128K RAM $399.00
- ☐ Computer Cabinet $69.00
- ☐ 83 Key full-funtion Keyboard $99.00
- ☐ 100 WATT Power Supply $110.00
- ☐ 135 WATT Power Supply $145.00
- ☐ Monochrome Graphic Card w/Printer Port $210.00
- ☐ Color Graphic Card $149.00
- ☐ FDD Controller Card $99.00
- ☐ Parallel Printer Card $59.00
- ☐ ASYNC & RS232 Port $75.00
- ☐ 320KB DS/DD Slimline Disk Drive $139.00
- ☐ IBM Parallel Cable 10' $19.95
- ☐ IBM Prototype Board (SUN-208) ... $9.50
- ☐ MICROLOG Z-80B Co-Processor, Multi-funtion (Run CP/M80 Software, Require 64K RAM) $499.00
- ☐ Apparat EPROM Blaster $129.00
- ☐ IBM Up-Grade Kit (4164) ... $35.00/per kit

Apple Compatible Products

- SUN Z80 Card (w/o software) $55.00
- SUN 80 Column Card (w/Soft switch) $85.00
- Power Supply (5 Amp) $59.95
- Cooling Fan $42.00
- Parallel Printer Card $39.00
- Floppy Disk Controller $47.00
- EPROM Programmer (2716, 2732, 2764) $75.00
- APPARAT PROM Blaster $119.00
- Apple Prototype Board (SUN-722) $5.95

Above items are not compatible with Apple IIe

S-100 Products

- 64K Static Memory Board (6116) w/o RAM A & T $155.00
- 64K Static Memory Board (6116) w/RAM A & T $295.00
  Uses 6116 CMOS RAMS, ½ Amp Max, w/64K @6MHz Extended Addressing, Bank Select 4-16K Blocks, 2716 EPROM can replace any 6116RAM, 8 Bit IEEE 696.
- UFDC-1 5¼ and 8 Floppy Disk Controller (BIOS available) A & T $225.00
- Clock/Calendar A & T $115.00
- Prototype Board (SUN-721) $9.95
- Mother Board/Card Cages (6, 8 & 12 Slots) are available .... CALL

General Products

SAM WOO HIGH RESOLUTION MONITOR
Features:
- 22 MHz Bandwidth
- Composite Video
- Anti-glare Screen
- Passes FCC & UL Approved
- 1000 Lines or 132 Charactors Across
- Impedance: high or 75 Ohm

12" AMBER or GREEN **$99.00**

12" Green TTL Monitor (For IBM, 20 MHz) $135.00

SPECIAL SALE ITEMS

- ★ 10MB Hard Disk Drive (Internal) w/Controller for IBM PC $749.00
- ★ S-100 12 Slot Motherboard A & T . $55.00
  Bare Board $23.00
- ★ IBM Prototype Board (SUN-208) ... $9.50
- ★ RAM 4164 (150ns) $3.95

TTL IC, ROM, RAM & CPU CHIPS, CONNECTORS & IC SOCKETS ARE AVAILABLE.

TERMS: VISA, MASTER Card, C.O.D. (Cash or Certified Check Required), Check (Allow 2-3 WKS for Clearing) Shipping & H/C $3.00 for 3 Lbs plus 50¢ for each add LB. Calif. residents add Calif. Sales Tax. $10.00 Minimum Order.

IBM & Apple are registered trade marks of IBM & Apple

FORTRON CORPORATION Power Supply Professional

3797 YALE WAY, FREMONT, CA 94538

ORDER TOLL FREE: **[800] 821-9771**
INFORMATION & CALIF. RES. (415) 490-8171

FC 135-40 Features:

- •Full Replacement to your regular IBM® PC 65 W. Power Supply
- •4 Disk Drives Connectors
- •Building "ROTRON" or equal High Performance Cooling Fan
- •Schematics available
- •One year Warranty
- •+5V/15A, +12V/4.2-8.5A (peak) +12V/1A, −5V/1A, (max. outputs)

140 W.(max) Power Switcher

#FC 135-40



only **175.00**

[Assembled & Fully Tested in USA]

IDEAL FOR:
- •Upgrade IBM® PC
- •OEM Manufacturer
- •Do it yourself an IBM® PCXT Compatible

Please do not confuse this high quality product with the cheap imported units sold by others because of same outlooking.

Dealers/OEMs are Invited

For "Build Your Own Computer" and OEM's Convenience, we also carry:

FC 427 Keyboard

- •For IBM® PC or its compatible products
- •High Performance
- •High Reliability

109.00



FC 630A-2 Cabinet

- •IBM identical
- •Use FORTRON FC 135-40 power supply
- •7 & 8 slots rear panels, good for 0.75" or 1" apart slot connectors.

99.00



HSC 130-40 130 Watt Power Switcher

- •For DTC mega-board & Faraday CPU board & other PCXT Compatibles
- •Backside Power Switch
- •Use Cabinet FC-630

169.00



FC-630 Cabinet

- •On-off switch to be on back side
- •Use FORTRON HSC-130-40 power supply
- •Good for Faraday
- •6400 or DTC mega-board

99.00



COMPUTER DISCOUNT PRODUCTS

Stocking **HUGE** Inventories of APPLE & IBM Products SINCE

★ GUARANTEED Fair Pricing Is Our Policy ★

FREE SHIPPING!!
*That's Right – WE PAY To Ship YOUR Purchase
See Details Below

Videx

T.M.

Ultraterm 244.99

Enhancer II	99.99
Function Strip	31.99
Hardswitch	14.99
Micromodem Chip	24.99
PSIO	169.99
Softswitch	25.99
Ultraplan	129.99
Videoterm w/Softswitch & Inverse	219.99

PRE-BOOTS:	
Apple Writer	14.99
Apple Writer for Ultraterm	23.99
Visicalc	39.99
Visicalc with Memory Expansion	66.99
Visicalc for Ultraterm	54.99

ACCESSORIES & PERIPHERALS

MONITORS:	
Amdek 300A-Ap	159.99
Amdek 310A-IBM	179.99
Princeton HX-12 RGB-IBM	459.99
Princeton Max-12 Amber -IBM	189.99
Quadram Quadchrome RGB-IBM	529.99
Taxan 420 RGB-Ap/IBM	439.99
Taxan 12" Amber-IBM	169.99
Taxan 12" Amber 20mhz-Ap	139.99

Other Monitors & Printers – $CALL

PRINTERS:	
C-ITOH 8510	379.99
Epson FX80	429.99
Okidata 92P w/Plug 'n Play-IBM	*$CALL*
DRIVES: ½ Height-Ap	189.99
Micro Sci A-2-Ap	209.99
Teac ½ Height-IBM	179.99
RIBBONS: Brother	*$CALL*
MX & FX80	4.99
MX & FX100	7.99
OKI 82, 83, 92, 93 & Gemini	2.99

MicroPro

FOR APPLE & IBM

Infostar	259.99
Mailmerge	139.99
Spellstar	139.99
Wordstar	239.99
Wordstar Pro	349.99
Pro Options Pack	181.99

CHARTSTAR – *NEW*
Business Graphics Package
For IBM 319.99

COMMUNICATIONS

CONNECT!

ASCII EXPRESS-Ap	109.99
CROSSTALK-IBM	139.99
HAYES MODEMS: 300 Baud Smartmodem	209.99
1200 Baud Smartmodem	479.99
1200B-IBM	409.99
Micromodem IIe	239.99
SOFTERM 2-Ap	149.99
NOVATION MODEMS: J Cat	109.99
103 Smart Cat	169.99
103/212 Auto Cat	399.99
Cat	135.99
Applecat II 300 Baud	249.99
Applecat Upgrade to 1200 Baud	309.99
Expansion Module	29.99

TELMERGE – *IBM* 119.99
New Telecommunications Program From MicroPro

ADVENTURE & GAMES

Ap	BRODERBUND Gumball	21.99
Ap	Choplifter, Drol	ea24.99
Ap	MICROLAB Crises Mountain/Dino Eggs	ea27.99
Ap	ODESTA Chess	45.99
Ap	SIERRA ON-LINE Frogger	21.99
Ap	SIR TECH Knight of Diamonds	27.99
Ap	Legacy of Llylgamyn	31.99
Ap	Wizardry	37.99
Ap	Wizprint	19.99
Ap	SUBLOGIC Flight Simulator II	37.99
Ap	ULTIMA III	39.99
IBM	BRODERBUND Serpentine	26.99
IBM	MICROSOFT Flight Simulator II	39.99
IBM	SIERRA ON-LINE Crossfire	26.99
IBM	SIR-TECH Wizardry	44.99
Ap/IBM	BRODERBUND Loderunner	24.99
Ap/IBM	Apple Panic	22.99
Ap/IBM	MICROLAB Miner 20-49er	27.99
Ap/IBM	SIERRA ON-LINE Ultima II	36.99
Ap/IBM	SUBLOGIC Night Mission Pinball	32.99

TRILLIUM & WINDHAM CLASSICS
NEW Text Adventure Games
by Famous Authors
– $CALL –

QUADRAM

FOR IBM

Microfazer (All Configurations)	149.99
Quad 512 + 64K	229.99
Quadboard I or II No K	219.99
Quadboard I or II 64K	269.99
Quadcolor I	205.99
Quadcolor I Upgrade	209.99

MEMORY CHIPS
Top Quality for
Best Performance *$CALL*

INFOCOM

FOR APPLE & IBM

CUTTHROATS	Underwater Treasure Hunt! – *NEW*	27.99
DEADLINE	Detective Case and YOU'RE IT	34.99
ENCHANTER	Beginning-Magician Mission	27.99
INFIDEL	Enter The Lost Pyramid	31.99
PLANETFALL	Investigate a Wild New World	27.99
SEASTALKER	Junior Level Rescue Mission	27.99
SORCERER	Mystic Clues & Magic Encounters	31.99
STARCROSS	Sci-Fi Adventure, 2188 A.D.	34.99
SUSPENDED	3 Levels and Custom Options	34.99
WITNESS	Classic Murder Mystery	27.99
ZORK I	All-Time Most Popular	27.99
ZORK II-III	Advanced Levels	31.99

Hitchhiker's Guide to the Galaxy 27.99
Suspect 34.99

DISKETTES & STORAGE

	10	100	
Dysan 5¼" SS/DD	29.99	279.99	
Dysan 5¼" DS/DD	38.99	369.99	
Maxell 5¼" SS/DD	24.99	229.99	
Maxell 5¼" DS/DD	34.99	329.99	
Memorex 3½" SS/DD	41.99	399.99	
Memorex 5¼" SS/DD	19.99	189.99	
Memorex 5¼" DS/DD	26.99	259.99	
Flip 'n File w/Locktray Holds 25-5¼"			17.99
Flip 'n File w/Locktray Holds 50-5¼"			27.99
Library Case (Assorted Colors)			1.99
Media Mate Holds 50-5¼" Diskettes			12.99
Media Mate Holds 30-3½" Diskettes			11.99
Printer Stand-Large (Plexiglass)			29.99
Printer Stand-Small (Plexiglass)			24.99

EDUCATIONAL

BASIC SKILLS

Ap	DLM School Versions Available	*$CALL*
Ap	Alien Addition/Alligator Mix	ea22.99
Ap	Demolition Division/Dragon Mix	ea22.99
Ap	Minus Mission/Multiplication	ea22.99
Ap	Spelling Wiz/Verb Viper	ea31.99
Ap	Word Invasion/Word Radar	ea31.99
Ap	LEARNING COMPANY Juggles Rainbow	21.99
Ap	Gertrudes Puzzle/Secret	ea29.99
Ap	Magic Spell/Bumble Plot	ea26.99
Ap	Number Stumper	26.99
Ap	Rocky's Boots	34.99
Ap	PEACHTREE Algebra I-III	ea31.99
Ap	Counting Bee	23.99
Ap	Decimals/Fractions 3.0	ea33.99
IBM	LEARNING COMPANY Addition Magician	26.99
IBM	Magic Spells	27.99
IBM	PEACHTREE Algebra I	34.99
Ap/IBM	SPINNAKER Alphabet Zoo	21.99
Ap/IBM	Delta Drawing	32.99
Ap/IBM	Facemaker/Fraction Fever	ea23.99
Ap/IBM	Hey Diddle/Kindercomp	ea21.99
Ap/IBM	Snooper Troops I-II	ea29.99
Ap/IBM	Story Machine	23.99
Ap/IBM	LEARNING COMPANY Reader Rabbit	26.99
Ap/IBM	Moptown Hotel/Parade	ea26.99
Ap/IBM	Word Spinner	26.99

ADVANCED SKILLS

Ap	MASTERTYPE	31.99
Ap	MICROSOFT Typing Tutor II	19.99
Ap	PEACHTREE PSAT or SAT	ea33.99
IBM	CAI Masters	ea31.99
IBM	Subjects	ea16.99
IBM	MASTERTYPE	34.99

Muppet Learning Keys – *NEW* 59.99

APPLICATIONS SOFTWARE

FOR THE HOME

Ap	BRODERBUND Bank Street Writer	44.99
Ap	Bank Street Speller	49.99
Ap	CONTINENTAL Tax Advantage	39.99
Ap	Home Accountant	44.99
Ap	Home Accountant (Mac)	75.99
Ap	SIERRA ON-LINE Homeword	45.99
Ap	MONOGRAM Dollars & $ense	69.99
IBM	BRODERBUND Bank Street Writer	59.99
IBM	CONTINENTAL Home Accountant	84.99
IBM	Tax Advantage	49.99
IBM	MONOGRAM Dollars & $ense	109.99

FOR THE BUSINESS

Ap	BPI (GL, AP, AR, PAY)	ea275.99
Ap	CONTINENTAL FCM-First Class Mail	59.99
Ap	KENSINGTON Format II	109.99
Ap	PFS Report	79.99
Ap	File, Graph, Write	ea89.99
Ap	SENSIBLE SPELLER	79.99
Ap	SIERRA ON-LINE Screenwriter II	81.99
IBM	ASHTON TATE dBASE II	299.99
IBM	dBASE III	474.99
IBM	Encyclopedia	59.99
IBM	Frame Work	474.99
IBM	Friday	184.99
IBM	CONTINENTAL FCM-First Class Mail	71.99
IBM	Ultrafile	119.99
IBM	LIFETREE Volkswriter Deluxe	219.99
IBM	LOTUS Symphony	499.99
IBM	MULTIMATE	379.99
IBM	PFS Report	89.99
IBM	File, Graph, Write	ea99.99

MICRO COOKBOOK
For Apple & IBM
Includes Recipes 31.99

HARDWARE

Ap	ALS Z-Engine (Replaces Z-Card)	159.99
Ap	DAN PAYMAR Lower Case 1, Rev 1-6	25.99
Ap	Lower Case 2, Rev 7	19.99
Ap	JOYSTICK Kraft or TG	39.99
Ap	MICROSOFT Softcard	229.99
Ap	Ram Card	74.99
Ap	ORANGE MICRO Grappler +	114.99
Ap	Bufferboard	119.99
Ap	Buffered Grappler	179.99
Ap	TITAN Accelerator IIe	449.99
Ap	Neptune 64K	199.99
Ap	Saturn 64K Ram	279.99
IBM	AST I/O Plus	*$CALL*
IBM	Mega Plus	289.99
IBM	Six Pack Plus	279.99
IBM	JOYSTICK Kraft or TG	44.99
IBM	PLANTRONICS Color Plus Board	375.99
IBM	TITAN 64K Board	499.99
Ap/IBM	KRAFT Paddles	31.99
Ap/IBM	TG Paddles	27.99

KENSINGTON
System Saver-AP 65.00
PC Saver-IBM 29.99

UTILITIES & ENHANCEMENTS

Ap	BEAGLE Apple Mechanic/Beagle Bag	ea19.99
Ap	Beagle Basic/Double Take	ea23.99
Ap	Dos Bos/Silicon Salad	ea17.99
Ap	Fat Cat	26.99
Ap	GPLE	32.99
Ap	Pronto Dos/Frame Up/Utility City	ea19.99
Ap	EASTSIDE Wildcard II	111.99
Ap	FINGERPRINT Epson Enhancement	44.99
Ap	KOALA Touch Pad	85.99
Ap	MOCKINGBOARD – Speech Chips *$CALL*	109.99
Ap	THUNDERCLOCK	99.99
IBM	KOALA Speed Key	79.99
IBM	Speed Key System	159.99
IBM	Touch Pad	95.99
IBM	Touch Pad PCjr	85.99
IBM	NORTON UTILITIES	55.99
IBM	SIDEWAYS	44.99
Ap/IBM	CENTRAL POINT Copy II + /PC	25.99

GRAPHICS SOFTWARE

Ap	BEAGLE Typefaces	15.99
Ap	Graphics – *NEW*	44.99
Ap	Alpha Plot	25.99
Ap	Triple Dump – *NEW*	31.99
Ap	Flex Text	19.99
Ap	BRODERBUND Print Shop	39.99
Ap	PENGUIN Complete Graphics System	44.99
Ap	Graphics Magician	37.99

MAIL AND PHONE ORDERS
Inquiries Welcome!
(408) 985-0400
MAIL, PHONE, WILL-CALL
SERVICE FROM 8AM (PST)

COMPUTER DISCOUNT PRODUCTS
860 So. Winchester Bl., San Jose, CA 95128
– CALL (408) 985-0400 –
Retail Showrooms In California
San Jose • San Mateo • San Francisco

- No Charge For Credit Cards
- Prices Subject To Change
- Software Sales Are Final

***Most Items Shipped Via 2-Day Service – NO CHARGE**
Printers & Monitors Shipped Standard Service – NO CHARGE

VISA AMERICAN EXPRESS MasterCard

MEGA-BYTES FOR MICRO-BUDGETS

expand your system...shrink your cost.

Why pay more for top quality products when our prices are consistently among the lowest anywhere? We invite you to compare prices, then call us.

LEADING EDGE COMPUTERS*	SUG. RETAIL	SALE PRICE
256K, 2 Floppy Drives, Mono Display	$1995	$1598
256K, 2 Floppy Drives, Color Display	2495	1798
256K, 1 Floppy & 10 Meg Hard Drive, Mono Display	2995	2298
256K, 1 Floppy & 10 Meg Hard Drive, Color Display	3495	2598

*All Leading Edge Computers come with MS-DOS 2.11, L.E. Word Processing, GW BASIC, plus more!!!

GREAT LAKES (PEGASUS) Hard Disk Subsystems	SALE PRICE
10 MEGABYTE Internal	$1049.00
10 MEGABYTE External	1195.00
23 MEGABYTE External	1869.00
40 MEGABYTE External	2449.00
65 MEGABYTE External	Call
140 MEGABYTE External	Call
TAPE DRIVE 23 Megabyte Internal	950.00
TAPE DRIVE 23 Megabyte Standalone	Call

EPSON PRINTERS	
FX-80	$419.00
FX-100	619.00
LQ-1500	1135.00

IBM PC-AT ENHANCED
1.2 MEG FLOPPY & 20 MEG HARD DISK
Only . . . **$4,750.00**

DYSAN DISKETTES (10 per box)	
104/1D 5¼" SS DD	$27.98
104/2D 5¼" DS DD	29.98
3740/1D 8" SS DD	35.98
3740/2 8" DS SD	35.98
3740/2D 8" DS DD	39.98

PRINCETON GRAPHIC MONITORS	
HX-12	Call
MAX-12	Call
SR-12	Call

SHARP PC-5000X
Portable Computer with On-Board Printer
Only . . . **$1,695.00**

HAYES MODEMS	
1200B (IBM PC)	$399.50
1200 (RS232)	489.50

ORDERS ONLY 800-858-4810
IN CALIF. 800-821-6662

VISA

COMMERCIAL BUSINESS SYSTEMS

2858 S. ROBERTSON BLVD., LOS ANGELES, CA 90034

master charge

INFORMATION (213) 559-0596

Phone orders accepted on Visa and Mastercard only. California residents add 6.5% sales tax. No C.O.D. Actual shipping and handling charge added to all orders. Prepaid orders as follows: Money orders or cashier's check–merchandise shipped upon receipt. Personal checks must clear before shipping. 20% restocking fee. Prices and availability subject to change. $100 minimum order.

HIGH REL ★ SWITCHING POWER SUPPLIES ★ LOW COST

SW40W



SW70W



SW80W



SW138



SW150



S_3 & S_4



R_1 & R_{1A}



ITEM	FOR	+5V	−5V	+12V	+12V	−12V	+24V	+8V	±16V	W x D x H in.	TERMINALS	PRICE
SW40W	TERM. & 2 ALPS DRIVES	2.5A	–	2/2.5A pk.	–	.3A	–	–	–	6.3 x 3.9 x 1.9	MOLEX 5051	$54.95
SW70W	APPLE III, IBM PC-I, II	7A	.3A	2.5/3.5A pk.	–	.3A	–	–	–	9.6 x 4 x 2.4	MOLEX 126-P1	64.95
SW80W	PC WITH SOFT DRIVES	8A	.3A	3/4A pk.	–	.3A	–	–	–	7.4 x 4.5 x 2.3	MOLEX 2139	74.95
SW138	IBM PC-XT HARD DRIVE	15A	1.0A	4/5A pk.	–	1.0A	–	–	–	9.5 x 5.6 x 4.6	MOLEX, AMP.	119.95
SW150	PC WITH HARD DRIVES	12A	.3A	4/5A pk.	2.5A	.5A	–	–	–	10.4 x 5 x 2.5	TERM. BLOCK	129.95

SPECS. OF ABOVE SWITCHERS: 117/220 VAC SELECTABLE, INPUT 90-132 VAC/180-275 VAC, EFFIC. 75% TYPICAL, LINE REGUL. 0.3%, LOAD REGUL. 1% ON +5V, 5% ON OTHER VOLTAGES, 6.2 OVP SETTING ON +5V, OVERLOAD & SHORT CIRCUIT PROTECT, LOW OUTPUT RIPPLE & NOISE, 1% MAX, 50,000 HRS. MTBF RELIABILITY, UL, FCC & VDE SAFETY & NOISE STANDARDS.

S_3	FOR S-100, 10 SLOTS	5A	1A	*	–	–	5/7A pk.	12A	3A	10 x 6 x 5	SOLDER POST	$105.95
S_4	FOR S-100, 6 SLOTS	4A	1A	*	–	–	4/5A pk.	8A	2.5A	8.4 x 5 x 4.8	SOLDER POST	89.95
R_1	2 FLOPPY DRIVES	3A	.5A	*	–	–	3/4A pk.	–	–	8 x 4 x 3.4	SOLDER POST	44.95
R_{1A}	APPLE II PC	3A	.5A	3/4A pk.	–	.5A	–	–	–	8 x 4 x 3.4	SOLDER POST	46.95
C_{64}	COMPATIBLE TO COMMODORE C64 (OR C+4) POWER SUPPLY; +5V/1.7A, 9 VAC/1A & 117 VAC IN, POTTED & U/L.											19.95

★: +24V CAN BE CHANGED TO +12V BY FACTORY, PLEASE SPECIFY WHEN YOU ORDER.
THE ABOVE 5 LINEAR P/S ARE WITH 3% LOAD REGUL., OVP ON +5V, FUSED: INPUT & OUTPUTS.

C64



POWER TRANSFORMERS: (WITH MOUNTING BRACKET) ON SALE

ITEM	PRIMARY	SECOND. #1	SECOND. #2	SECOND. #3	W x D x H in.	PRICE
T_1	110/120 VAC	2 x 8 VAC/7A	28 VAC, CT, 2-5A	–	3¾ x 3⅝ x 3⅛	$15.95
T_2	110/120 VAC	2 x 8 VAC/12A	28 VAC, CT, 3A	–	3¾ x 4⅜ x 3⅛	21.95
T_3	110/120 VAC	2 x 8 VAC/6A	28 VAC, CT, 2A	28 VAC, CT, 3A	3¾ x 4⅜ x 3⅛	23.95
T_4	110/120 VAC	16 VAC, CT, 4A	28 VAC, CT, 1.5A	28 VAC, CT, 3A	3¾ x 3⅝ x 3⅛	17.95
T_{4-1}	110/120 VAC	16 VAC, CT, 4A	28 VAC, CT, 1.5A	48 VAC, CT, 2A	3¾ x 3⅝ x 3⅛	14.95
T_5	110/120 VAC	16 VAC, CT, 3A	28 VAC, CT, 2A	–	3 x 3 x 2½	11.95

SHIPPING:
FOR EA. POWER SUPPLY: $6.00 IN CALIF.; $8.00 IN OTHER STATES; $18.00 IN CANADA. FOR EA. TRANSFORMER: $6.00 IN ALL STATES; $12.00 IN CANADA. CALIF. RESIDENTS ADD 6.5% SALES TAX.

MAILING ADDRESS:
P.O. BOX 4296
TORRANCE, CA 90510
TELEX: 182558

VISA

SUNNY INTERNATIONAL

IN BUSINESS SINCE 1975
(213) 328-2425 MON-FRI 8:30-5:30

MasterCard

SHIPPING ADDRESS:
22129½ S. VERMONT AVE.
TORRANCE, CA 90502

SOMEBODY
Has To Have The Lowest Prices!

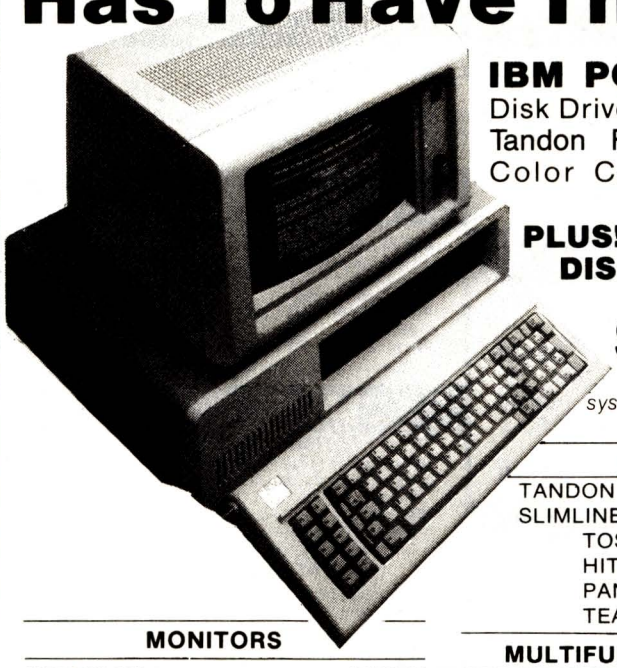

IBM PC, 256k, 320k Disk Drive, (Toshiba Half or Tandon Full-High), Persyst Color Card, Amdek 300 Monitor, Dos 2.1

PLUS!-A 10MB HARD DISK SUB SYSTEM

All For Only:

$2699.00

(We configure and test the system for you at no extra cost)

MONITORS

AMDEK 300	$135.00
AMDEK 300A	$149.00
AMDEK 310A	$165.00
AMDEK COLOR I	BEST PRICE
AMDEK COLOR II	BEST PRICE
PGS HX-12	$475.00
PGS MAX-12	$195.00
PGS SR-12	$625.00
IBM MONOCHROME DISPLAY	$260.00
IBM COLOR DISPLAY	$590.00
QUADCHROME C. DISPLAY	$590.00

PRINTERS

EPSON FX 80	$489.00
EPSON FX 100	$689.00
EPSON RX 80	$295.00
EPSON RX 80 FT	$349.00
OKIDATA 82A	$299.00
OKIDATA 83A	$569.00
OKIDATA 92P	$399.00
OKIDATA 93P	$649.00
OKIDATA 84P	$799.00
OKIDATA 2410P	$1999.00
OKIDATA 2350P	$1849.00
TOSHIBA P1351	$1399.00
TOSHIBA 1340	$825.00
NEC SPINWRITER 3550	$1650.00
NEC SPINWRITER 7730	$1750.00
NEC PINWRITER 80 COL.	$720.00
NEC PINWRITER 136 COL.	$960.00
QUAD INK JET PRINT	$799.00
CITOH 40 CPS	BEST PRICE
CITOH 55 CPS	BEST PRICE
GEMINI 10X	$290.00
GEMINI 15X	$390.00
BROTHER HR-25	$719.00
BROTHER HR-35	$925.00
SILVER REED 500P	$465.00
SILVER REED 550P	$570.00
SILVER REED 770P	$995.00

ACCESSORIES ON NEC & OKIDATA PRINTERS AVAILABLE.

DRIVES

TANDON TM-100-2	$199.00
SLIMLINE DRIVES:	
TOSHIBA	$165.00
HITACHI	$165.00
PANASONIC	$165.00
TEAC 55B	$165.00

MULTIFUNCTION BOARDS

AST I/O+1 SER & 1 PAR	$179.00
AST SIX PACK 64K, 1 SER, 1 PAR	$269.00
AST MEGA+64K, 1 SER	$269.00
AST COMBO	$269.00
QUADBOARD 64K (EXPANDABLE TO 256K)	$269.00
QUADBOARD 64K, 1s, 1p, GAME PORT (EXPANDABLE TO 384K)	$299.00
IBM COLOR GRAPHIC ADAPTER	$225.00
IBM MONO/PRINTER ADAPTER	$230.00
PERSYST COLOR ADAPTER	$199.00
PERSYST MONO/PRINTER ADAPTER	$215.00
HERCULES GRAPHIC	$349.00
PLANTRONICS COLOR PLUS	BEST PRICE
PARADISE MULTIFUNCTION CARD	BEST PRICE
ORCHID BLOSSOM	BEST PRICE
64K RAM UPGRADE KIT	$50.00
PEACOCK COLOR CARD W/PP	$215.00
STB RIO PLUS 64K	BEST PRICE
STB SUPER RIO 64K	BEST PRICE
STB PIGGYBACK FOR SUPER RIO	BEST PRICE
STB GRAPHIX PLUS II	$375.00

MODEMS

HAYES SMART MODEM 1200	$469.00
HAYES SMART MODEM 300	$209.00
HAYES 1200B PLUG IN MODEM CARD	$429.00
QUBIE PC 212A/1200 INTERNAL	$275.00
QUBIE 212E/1200 EXTERNAL	$299.00

HARD DISKS

10MB HARD DISK SUB SYSTEM INCLUDES: *SOFTWARE, CONTROLLER, CABLES, ETC.*	
INTERNAL	$850.00
EXTERNAL	$1025.00
TALLGRASS TECHNOLOGY	
12MB W/TAPE BACKUP	$2750.00
20MB W/TAPE BACKUP	$3199.00
35MB W/TAPE BACKUP	$4350.00
INTERFACE IBM	$125.00
POWER BACK-UP SYSTEM	$479.00

GENERAL

MAXELL DISKETTES MD2	$35.00/box
CONTROL DATA DISKETTES	$30.00/box
MICROSOFT MOUSE	$130.00
MOUSE W/WORD	$339.00
KEYTRONIC KEYBOARD KB5151	$199.00
PARALLEL CABLES	BEST PRICE
IBM PC DOS 2.1	BEST PRICE

We also carry
CORONA, APPLE IIe, APPLE IIc, MACINTOSH, TECHMAR.

Many other products available, Please call for Low, Low Prices!

Microshop
COMPUTER PRODUCTS

(714) 838-7530

2640 Walnut Avenue, Unit K, Tustin, California 92680

Prices & availability subject to change without notice - IBM is a registered trademark of IBM Corp.



9 YEARS IN COMPUTER MAIL ORDER
GSL COMPUTER
TOLL FREE 1-800-545-2633

All prices for MC, VISA, AMEX or Pre-pay customers only. Call for P.O. Prices.

Terms:
We accept MC, Visa, American Express (3% handling charge), Wire transfer, and Purchase Orders from qualified firms. All returns without RMA are subject to 20% restocking charge. Utah residents pay 5.75% sales tax. Call for freight charges. Prices subject to change and are in U.S. Currency only. MINIMUM ORDER $15.00

UPS Red Label 1 day deliery
UPS Blue Label 3 day delivery
UPS Surface Min. 3 to 10 day delivery

IBM SYSTEMS

IBM PC-1 Includes 64K, RAM, 1 ea. 360K FD, KB **$1449**

IBM PC-2 64K RAM, 2 ea 360K FD, KB **$1599**

IBM PC-22 256K RAM, 2 ea 360K FD, KB **$1699**

IBM PC-3 256K RAM, 2 ea 360K FD, IBM Mono Display, IBM Mono Card, KB **$2129**

IBM PC-33 256K RAM, 2 ea 360K FD, Color Bd. Monitor, KB **$2049**

IBM PC-4 256K RAM, 2 ea 360K FD, Everex Graphics Edge, Quimax PX4, KB **$2549**

MEMORY BOARDS

AST 6 Pak+ w/64K (Expands to 384K) has Par, Serial, Clk, RAM Disk, Spooler **$259**
AST 6 Pak+ w/384K Plus all above features **$449**
P.C. WARE "256K RAM" w/0 RAM **$119**
P.C. WARE "256K RAM" w/64K RAM **$159**
"Quadboard 384" w/64K (Expands to 384K) has Par, Serial, Clk, RAM Disk, Spooler, Game Port **$269**
"Quadboard 384" w/384K and all above features **$459**

MONITORS

IBM Color Display **$569**
IBM Monochrome Monitor **$249**
QUIMAX PX-IV Hi-Res RGB & Green (In One) ... **$469**
(Better than Princeton)

NEW — QUIMAX MONITORS

Hi-Res, 14" Screen Tilt & Swivel
DM14A (Amber) **$159**
DM14G (Green) **$149**
PX-IV (4) - Hi-Res RGB w/Switch to convert to green for Word Processing w/Tilt & Swivel Base **$469**
(Better than Princeton)

PRINTERS

Daisywriter 2000-48K Buffer, 20 to 40 CPS Ltr Quality **$999**
Diablo 620 API (25CPS) **$749**
Diablo 630 API (40CPS) **$1549**
Diablo 630 ECS/IBM or API **$1649**
Epson FX-80 (160 CPS - 10" - Graphtrax/Tractor) **$399**
Epson FX-100 (160 CPS - 15" - Graphtrax/Tractor) **LQ**. **$649**
Juki 6100 (18 CPS - Diablo Compatible Daisywheel) **$419**
Juki 6300 (40 CPS - 16" - 3K Buffer Upgrade to 15K) **$799**
Okidata 82a (120CPS -10") **$319**
Okidata 83a (120CPS - 15") **$569**
Okidata 92a (160CPS - 10") **$399**
Okidata 93a (160CPS - 15") **$649**
Panasonic 1091 (120 CPS - Logic Seeking Head - Runs Faster than FX-80-Par Port - Double Strike Switch - with Tractor **$299**
Toshiba P-1351 (192CPS/120CPS Ltr) **$1299**

MEMORY UPGRADES

IBM UP-GRADE FOR PC

INCLUDES 9 EA. 4164-200NS FOR EXPANSION ON ALL PRODUCTS WITH PARITY

$32.00 PER SET **$29.95** 5 OR MORE

IBM MEMORY UPGRADE FOR AT

9 EA 4128-200 NS (128K)
$229.00

COMPAQ MEMORY (256K) UPGRADE

9 ea 256K CHIP (200NS)
$229.00

DISK DRIVES

	1	2	10
CDC 9409 DS/DD 360K	199	190	180
MIT M-4853 1/2 HGT	169	159	140
SHUGART SA455L DS/DD 360K 5" 1/2 HGT	155	145	140
TANDON TM100-1A SS/DD 160K 5" Full Size	150	140	130
TANDON TM100-2A DS/DD 360K 5" Full Size	155	145	140
TANDON TM-101-4 Quad 720K 5" Full Size	280	270	260
TEAC FD55B DS/DD 360K 1/2 H	135	129	119
TEAC FD55F Quad 720K 1/2 H	169	159	149

INTERNATIONAL INSTRUMENTATION

10, 15, 22 and 30 MG Hard Disk Subsystems

Plug in controller and have instant Mass Storage!

- 3 times faster than XT
- Boot from hard disk
- Fully PC or XT compatible

Size	Internal	External
10 MB	**$749**	**$889**
15 MB	**$989**	**$1089**
22 MB	**$1349**	**$1529**
33 MB	**$1769**	**$1889**

TAPE STREAMER

- 10 MG Streamer Tape back-up
- Back-up in 8 min.

Internal Stream 1/2 HGT. **$899**
External Stream (w/Power Supply and case) (1/2 HGT) **$995**
10.38 MG Tape Cartridge **$29**

IBM HARD DISK SYSTEMS

IBM XT 128K RAM, 10 MB Hard Disk, & Keybd **$3495**
PC-10 256K RAM, 10MG H.D., 1 ea 360K FD and Keybd **$2569**
PC-10/2 256K RAM, 10MG HD, 2 ea 1/2 Hgt 360K FD and Keybd **$2769**
PC-10/2M 256K RAM, 10 MG HD, 2 ea 360K FD, Quimax DM14A, IBM Monocard, Keybd ... **$3149**

IBM-AT SYSTEMS

3 TIMES SPEED OF XT

IBM-AT (Base Model) includes 256K RAM, 1.2 MB F.D., Clk/Cal, 8 Slots, Keylock, KB. **$3900**
IBM-AT (Enhanced) includes 512K RAM, 1.2 MB FD, 20 MB Fixed Drive, Ser/Par Port, 8 Slots, Keylock, KB **$5700**

AT ADD-ON DRIVES

20MG Hard Disk **$1295**
30MG Hard Disk **$1695**
1.2 MG F.D. w/Rails **$329**
360K F.D. w/Rails **$229**

MODEMS

Anchor Mark XII - External-Direct Connect-Hayes Commands Includes Serial Cable-Auto Answer & Dial **$239**
Hayes 1200 - External-Direct Connect **$479**
Hayes 1200B - Internal for IBM with Software **$399**
Pro-Modem 1200 - External-Direct Connect-w/Clock - Hayes Commands - Auto Answer and Dial **$329**

VIDEO CARDS

Mono Cards

IBM Monochrome Card **$229**
Hercules Graphics Card **$329**

Color Cards

IBM Color Card **$219**
STB Graphics Plus - Composite, Mono 50% Faster Scroll, Lite Pen Intfce, Flicker Free, Par Port Runs all Software **$349**
Everex - "The Graphics Edge" **$399**
(80X25 or 132X44) Runs Mono and Color Simultaneously - (640X200V) 16 Color Par Port

IBM MISCELLANEOUS

IBM Memory Upgrade Kit (64K) **$32**
P.C. Ware Serial Board **$79**
P.C. Ware Par Board **$75**
P.C. Ware Clock/Calendar **$59**
Math Co-Processor - **8087** **$149**
IBM DOS 2.1 ..... **$57**
IBM DOS 3.0 ..... **$60**

PRINTER SWITCHER

Allows you to switch from letter quality to Dot Matrix by flip of switch

SCN-2/Two Position Centronics Par to Centronics Par **$99**
SCN-4/Four Position Cen Par to Cen Par **$139**
SRS-2/Two Position Serial to Serial **$89**
SRS-4/Four Position Serial to Serial **$129**

MasterCard

Customer Service (801) 972-2739
Sales (Utah) (801) 972-2717
Sales (Outside Utah) (800) 545-2633

The Great Salt Lake Computer Company, Inc.

SEND FOR NEW CATALOG

Inquiry 152

VISA

Retail and Mail Orders
1780 West 2300 South
Salt Lake City, Utah 84119

Prices subject to change without notice.



Now, the lowest prices ever on

3M Scotch® DISKETTES

$1.53 ea. 5¼" SSDD Qty. 20 — **$2.06** ea. 5¼" DSDD Qty. 20

5¼" SSDD-96TPI → $2.29 ea. 5¼" DSDD-96TPI → $2.85 ea.

SOFT SECTOR ONLY! MINIMUM ORDER: 20 DISKETTES

These are factory-fresh 3M diskettes packed in boxes of 10 with Tyvek sleeves, reinforced hubs, identification labels and write-protect tabs.

3.5" MICRO-DISKETTES—SS-135 TPI → $2.89 ea.

LIFETIME WARRANTY ON ALL 3M SCOTCH DISKETTES!

FOR ORDERS ONLY: 1-800-621-6827 (In Illinois: 1-312-944-2788)

INFORMATION & INQUIRIES: 1-312-944-2788

HOURS: 8AM-5PM Central Time, Monday-Friday

WE WILL BEAT ANY NATIONALLY ADVERTISED PRICE ON THE SAME PRODUCTS AND QUANTITIES!

DISK WORLD!, Inc.

Suite 4806 • 30 East Huron Street • Chicago, Illinos 60611

DISK WORLD! Authorized Distributor Information Processing Products 3M

FANTASTIC LOW PRICES ON

BASF QUALIMETRIC DISKETTES!

$1.41 ea. 5¼" SSDD Qty. 20 — **$1.59** ea. 5¼" DSDD Qty. 20

PACKED IN PLASTIC LIBRARY CASES!

BASF QUALIMETRIC DISKETTES have a LIFETIME WARRANTY and are packed in PLASTIC LIBRARY CASES with Tyvek sleeves, reinforced hubs, user identification labels and write-protect tabs.

SOFT SECTOR ONLY! MINIMUM ORDER: 20 DISKETTES

BASF 3.5" MICRO-FLOPPIES: SSDD-135 TPI → $3.02 ea.

BASF 5¼" HIGH DENSITY FOR IBM PC-AT: DSDD-HD → $4.72 ea.

FOR ORDERS ONLY: 1-800-621-6827 (In Illinois: 1-312-944-2788)

INFORMATION & INQUIRIES: 1-312-944-2788

HOURS: 8AM-5PM Central Time, Monday-Friday

WE WILL BEAT ANY NATIONALLY ADVERTISED PRICE ON THE SAME PRODUCTS AND QUANTITIES!

DISK WORLD! Authorized Reseller Information Processing Media BASF

Incredible value!

Nashua™ Diskettes

LIFETIME WARRANTY!

$1.05 ea. 5¼" SSDD Qty. 50 — **$1.15** ea. 5¼" DSDD Qty. 50

These are poly-bagged diskettes packaged with Tyvek sleeves, reinforced hubs, user identification labels and write-protect tabs. NASHUA Corporation is a half-billion dollar corporation and a recognized leader in magnetic media.

SOFT SECTOR ONLY! Sold in multiples of 50 only!

FOR ORDERS ONLY: 1-800-621-6827 (In Illinois: 1-312-944-2788)

INFORMATION & INQUIRIES: 1-312-944-2788

HOURS: 8AM-5PM Central Time, Monday-Friday

WE WILL BEAT ANY NATIONALLY ADVERTISED PRICE ON THE SAME PRODUCTS AND QUANTITIES!

DISK WORLD!, Inc.

Suite 4806 • 30 East Huron Street • Chicago, Illinos 60611

DISK WORLD! Authorized Distributor NASHUA MAGNETIC MEDIA

Save 20% to 60% Or More

On all your OFFICE & COMPUTER SUPPLIES!

Now, you can enjoy DISK WORLD! savings on more than 21,000 office and computer supply products! You name it, we got it...at tremendous savings.

Everything from Scotch™ Tape to Post-It Notes™ to paper clips and rubber bands...and thousands of computer products as well!

Our catalog is huge...more than 700 pages, listing more than 21,000 items.

We have to charge for it: $10.00 to be exact.

But we include a $50.00 worth of discount coupons that you can use on future orders.

Now, it's DISK WORLD! for every office or computer supply need...and always at tremendous savings!

This offer supercedes all prior catalog offers.
Not responsible for typographical errors.

FOR ORDERS ONLY: 1-800-621-6827 (In Illinois: 1-312-944-2788)

INFORMATION & INQUIRIES: 1-312-944-2788

HOURS: 8AM-5PM Central Time, Monday-Friday

WE WILL BEAT ANY NATIONALLY ADVERTISED PRICE ON THE SAME PRODUCTS AND QUANTITIES!

DISK WORLD!, Inc.

Suite 4806 • 30 East Huron Street • Chicago, Illinos 60611

DISK WORLD!

DISK WORLD! Ordering & Shipping Instructions

Shipping: 5¼" & 3.5" DISKETTES—Add $3.00 per each 100 or fewer diskettes. **Other Items:** Add shipping charges as shown in addition to other shipping charges. **Payment:** VISA and MASTERCARD accepted. **COD Orders:** Add additional $3.00 Special Handling charge. **APO, FPO, AK, HI & PR Orders:** Include shipping charges as shown **and** additional 2% of total order amount to cover PAL and insurance. **Taxes:** Illinois residents only, add 8% sales tax.

Prices subject to change without notice.
This ad supercedes all other ads.
Not responsible for typographical errors.
MINIMUM TOTAL ORDER: $35.00

FOR ORDERS ONLY: 1-800-621-6827 (In Illinois: 1-312-944-2788)

INFORMATION & INQUIRIES: 1-312-944-2788

HOURS: 8AM-5PM Central Time Monday-Friday

WE WILL BEAT ANY NATIONALLY ADVERTISED PRICE ON THE SAME PRODUCTS AND QUANTITIES!

DISK WORLD!, Inc.

Suite 4806 • 30 East Huron Street • Chicago, Illinos 60611

DISK WORLD!

ATHANA DISKETTES The great unknown!

99¢ ea. ← 5¼" SSDD Qty. 50 — **$1.09** ea. 5¼" DSDD → Qty. 50

You've used these diskettes hundreds of times...as copy-protected originals on some of the most popular software packages. They're packed in poly-bags of 25 with Tyvek sleeves, reinforced hubs, user identification labels and write-protect tabs.

LIFETIME WARRANTY!

SOFT SECTOR ONLY! Sold in multiples of 50 only.

FOR ORDERS ONLY: 1-800-621-6827 (In Illinois: 1-312-944-2788)

INFORMATION & INQUIRIES: 1-312-944-2788

HOURS: 8AM-5PM Central Time, Monday-Friday

WE WILL BEAT ANY NATIONALLY ADVERTISED PRICE ON THE SAME PRODUCTS AND QUANTITIES!

DISK WORLD!, Inc.

Suite 4806 • 30 East Huron Street • Chicago, Illinos 60611

DISK WORLD! Authorized Distributor ATHANA MAGNETIC MEDIA

DISKETTE STORAGE CASES

AMARAY MEDIA-MATE 50: A REVOLUTION IN DISKETTE STORAGE



Every once in a while, someone takes the simple and makes it elegant! This unit holds 50 5¼" diskettes, has grooves for easy stacking, inside nipples to keep diskettes from slipping and several other features. We like it! **$10.95** ea. + $2.00 Shpng.

DISKETTE 70 STORAGE: STILL A GREAT BUY.



Dust-free storage for 70 5¼" diskettes. Six dividers included. An excellent value. **$11.95** + $3.00 Shpng.

DISK CADDIES

The original flip-up holder for 10 5¼" diskettes. Beige or grey only. **$1.65** ea. + 20¢ Shpng.

FOR ORDERS ONLY: 1-800-621-6827 (In Illinois: 1-312-944-2788)

INFORMATION & INQUIRIES: 1-312-944-2788

HOURS: 8AM-5PM Central Time, Monday-Friday

WE WILL BEAT ANY NATIONALLY ADVERTISED PRICE ON THE SAME PRODUCTS AND QUANTITIES!

DISK WORLD!, Inc.

Suite 4806 • 30 East Huron Street • Chicago, Illinos 60611

DISK WORLD! The value leader in Computer supplies And accessories.

PRINTER RIBBONS: at extraordinary prices!

Brand new ribbons, manufactured to Original Equipment Manufacturer's specifications, in housings. (Not re-inked or spools only.)

LIFETIME WARRANTY!

Epson MX-70/80 . . **$3.58** ea. + 25¢ Shpng.
Epson MX-100 . . . . **$4.95** ea. + 25¢ Shpng.
Okidata Micro83 . . **$1.48** ea. + 25¢ Shpng.
Okidata Micro84 . . **$3.66** ea. + 25¢ Shpng.

FOR ORDERS ONLY: 1-800-621-6827 (In Illinois: 1-312-944-2788)

INFORMATION & INQUIRIES: 1-312-944-2788

HOURS: 8AM-5PM Central Time, Monday-Friday

WE WILL BEAT ANY NATIONALLY ADVERTISED PRICE ON THE SAME PRODUCTS AND QUANTITIES!

DISK WORLD!, Inc.

Suite 4806 • 30 East Huron Street • Chicago, Illinos 60611

DISK WORLD!

PAPER: Save 50% or more!

We buy paper by the TRUCKLOAD from the two biggest mills in the country.

Therefore, we charge a lot less than you've been paying!

For the complete DISK WORLD paper catalogs and price lists, call 1-312-944-2788 or write us. (Please do not use the "800" line for paper catalog requests, unless you are also placing an order.

Don't spend more than you have to for top-quality computer printer paper. Call DISK WORLD! today.

INFORMATION & INQUIRIES: 1-312-944-2788

HOURS: 8AM-5PM Central Time Monday-Friday

WE WILL BEAT ANY NATIONALLY ADVERTISED PRICE ON THE SAME PRODUCTS AND QUANTITIES!

DISK WORLD!, Inc.

Suite 4806 • 30 East Huron Street • Chicago, Illinos 60611

DISK WORLD! Where paper Costs less!

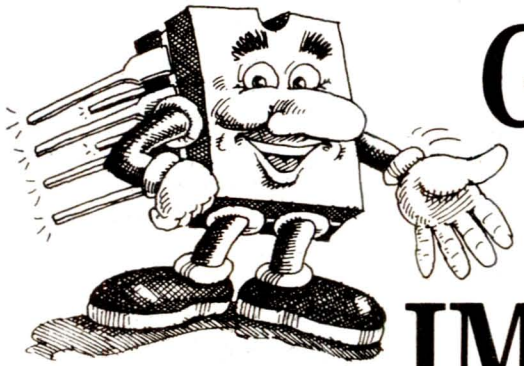

GUARANTEED I.C.'s. SHIPPED IMMEDIATELY

The Computer Parts Merchant is a leading nationwide supplier of wholesale I.C.'s. We have just about every I.C. made in stock today. Plus, we offer these special services:

Guaranteed parts—every part guaranteed for 60 days—and pretested before shipment.

Guaranteed fast—same day—shipping.

Guaranteed low prices.

Guaranteed satisfaction or purchase price cheerfully refunded.

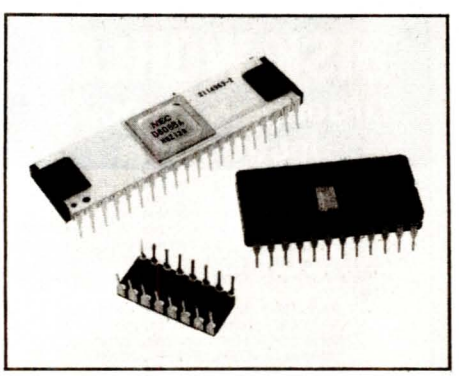

How to order.

Call toll free. We accept Visa, Mastercard or American Express. Or we can ship UPS C.O.D.
National 800-235-4900
California 800-238-4900
Local Orange County
(714) 474-1033.

CPM
The Computer Parts Merchant, Inc.

Visit our retail store:
The Computer Parts Merchant, Inc.
17777 Main Street, Suite D
Irvine, CA 92714

Terms: minimum order $10. For shipping and handling, include $2.50 UPS Ground, or $3.50 for UPS Air. California residents must include 6% sales tax. All prices are subject to change without notice. We are not responsible for typographical errors. All merchandise subject to prior sale.

Search service. If we don't have the I.C. you need in stock, we can find it for you. (There is a $25 minimum charge for I.C.'s found through a search.)

A few samples from our million part inventory:

A few samples from our million part inventory:

74LSXX

74LS00	$ .38	74LS83	$ .87	74LS170	$1.49
74LS02	.38	74LS86	.46	74LS191	.99
74LS04	.40	74LS91	.75	74LS221	1.30
74LS08	.40	74LS93	.66	74LS240	1.60
74LS10	.40	74LS107	.46	74LS241	1.30
74LS11	.40	74LS109	.46	74LS242	1.30
74LS12	.36	74LS112	.50	74LS243	1.30
74LS14	.76	74LS122	.53	74LS244	1.49
74LS20	.38	74LS124	2.90	74LS245	1.49
74LS21	.38	74LS132	.91	74LS251	.75
74LS30	.38	74LS137	.99	74LS257	.75
74LS32	.50	74LS138	.87	74LS258	.75
74LS37	.40	74LS147	2.75	74LS266	.79
74LS38	.40	74LS151	.66	74LS273	1.69
74LS40	.38	74LS153	.69	74LS373	1.49
74LS42	.66	74LS157	.65	74LS374	1.49
74LS51	.36	74LS158	.65	74LS377	1.49
74LS54	.38	74LS161	.75	74LS640	3.49
74LS63	1.50	74LS166	1.95	74LS669	1.99
74LS74	.55	74LS169	1.75	74LS670	2.99

Partial List

5, 8, 12 AND 15 VOLT VOLTAGE REGULATORS
Call for Prices

74SXX

74S00	$ .45	74S151	$ .97
74S02	.49	74S153	.97
74S04	.49	74S157	.97
74S08	.49	74S161	1.87
74S10	.45	74S169	3.99
74S11	.49	74S174	.99
74S20	.49	74S181	4.39
74S22	.45	74S194	1.99
74S30	.35	74S197	1.79
74S32	.59	74S240	2.20
74S37	.89	74S241	2.40
74S38	.99	74S244	2.20
74S74	.89	74S251	.95
74S86	.95	74S253	.95
74S112	1.19	74S257	.95
74S113	1.19	74S260	.79
74S124	2.99	74S273	2.45
74S132	1.59	74S287	2.29
74S138	.97	74S373	3.39
74S139	.97	74S374	3.39
74S140	.77	74S570	3.50

Call for others

DYNAMIC RAMS

TMS4027	$ 1.99	4116	$1.49
MM5280	1.95	2118	4.95
TMS4060	1.95	4164	5.95
UPD411	1.95	TMS4416	9.95
MK4108	1.95	41256	Call

Call for more

LINEAR DEVICES

LM301	$ .47	NE570	$3.95
LM307	.57	LM709	.59
LM309H	1.95	LM723	.59
LM312	1.75	LM741	.49
LM318	1.49	LM747	.69
LM324	.79	LM748	.59
LM350	4.95	LM1458	.59
LM380	.89	LM2900	.85
LM393	1.29	LM3900	.79
NE555	.57	MC4024	3.95
NE556	.77	MC4044	4.50

Call for others

74XX

7400	$ .35	7451	$ .39	74160	.89
7401	.35	7473	.54	74161	.89
7402	.39	7474	.69	74163	.89
7404	.39	7489	3.40	74164	.99
7406	.89	7498	.47	74166	1.50
7407	.89	7492	.69	74174	.99
7408	.41	74107	.39	74181	2.39
7410	.35	74109	.59	74191	1.15
7411	.39	74123	.69	74193	.99
7420	.35	74125	.69	74194	.99
7421	.49	74132	.59	74221	1.35
7427	.45	74147	1.75	74273	1.95
7430	.35	74151	.79	74366	.99
7432	.35	74153	.79	74367	.99
7438	.49	74154	1.25	74393	1.35
7442	.59	74157	.79		

Others on shelf

STATIC RAMS

2101	$1.95
2114	1.50
2147	4.95
TMS4044	4.59
TMM2016	4.59
HM6116	4.75
TMS4016	6.95
HM6264	39.95

Others on shelf

CMOS

4001	$ .35	74C00	$ .49
4002	.35	74C02	.47
4008	.95	74C04	.47
4010	.57	74C08	.47
4011	.37	74C10	.47
4012	.37	74C20	.49
4020	.87	74C30	.49
4021	.95	74C73	.87
4022	.87	74C74	.79
4030	.57	74C86	.59
4034	1.95	74C90	1.19
4040	.97	74C93	1.75
4041	.97	74C151	2.25
4050	.47	74C157	1.75
4069	.35	74C161	1.79
4071	.35	74C173	.79
4082	.35	74C174	1.19
4093	.67	74C192	1.49
4502	.95	74C193	1.49
4512	.97	74C373	2.45
4522	1.25	74C374	2.45
4532	1.95	74C906	.95
4556	.99	74C912	8.95
4585	.99	74C921	15.95

Many more. Call.

MEMORY EPROMS

2708	$3.95	2764	$6.95
2716	3.95	27128	34.95
2732	4.95		

More available.

Inquiry 78

74LS00

74LS00	.22	74LS166	1.50
74LS01	.24	74LS168	1.35
74LS02	.25	74LS169	1.35
74LS03	.25	74LS170	1.35
74LS04	.30	74LS173	1.35
74LS05	.25	74LS174	.85
74LS08	.30	74LS175	.90
74LS09	.30	74LS181	2.50
74LS10	.25	74LS190	1.45
74LS11	.30	74LS191	1.45
74LS12	.30	74LS192	1.45
74LS13	.75	74LS193	1.45
74LS14	.75	74LS194	1.45
74LS15	.35	74LS195	1.45
74LS20	.25	74LS196	1.35
74LS21	.30	74LS197	1.35
74LS22	.30	74LS221	1.35
74LS26	.30	74LS240	1.85
74LS27	.30	74LS242	1.85
74LS28	.30	74LS243	1.85
74LS40	.30	74LS244	2.25
74LS42	.35	74LS245	3.95
74LS48	.35	74LS247	1.65
74LS51	.35	74LS248	1.65
74LS54	.35	74LS249	1.65
74LS55	.35	74LS251	1.75
74LS73	.35	74LS253	1.75
74LS74	.45	74LS258	1.50
74LS75	.45	74LS259	2.95
74LS76	.45	74LS260	1.15
74LS78	.75	74LS261	3.75
74LS83A	.75	74LS266	1.35
74LS85	.75	74LS273	1.75
74LS86	.35	74LS275	1.95
74LS90	.75	74LS279	.75
74LS92	.75	74LS283	.75
74LS93	.75	74LS290	.75
74LS95	.75	74LS293	1.25
74LS96	.75	74LS295	1.65
74LS107	.35	74LS298	1.65
74LS109	.45	74LS323	2.95
74LS113	.75	74LS324	1.15
74LS114	.75	74LS347	1.55
74LS122	.95	74LS348	1.45
74LS123	.95	74LS352	1.65
74LS124	.95	74LS353	1.95
74LS125	.75	74LS363	1.95
74LS126	.75	74LS365	1.25
74LS132	.95	74LS366	1.25
74LS133	.75	74LS367	.95
74LS136	.75	74LS368	.95
74LS138	.95	74LS373	1.95
74LS139	.95	74LS374	1.95
74LS145	.95	74LS375	.95
74LS148	.95	74LS377	.95
74LS151	.75	74LS378	1.55
74LS153	.75	74LS379	1.55
74LS154	.95	74LS381	1.95
74LS155	.75	74LS385	1.95
74LS156	.75	74LS386	1.25
74LS157	.75	74LS390	2.55
74LS158	.75	74LS393	1.55
74LS160	.75	74LS395	1.55
74LS161	.75	74LS424	1.95
74LS162	.75	74LS640	1.95
74LS163	.75	74LS668	2.75
74LS164	.95	74LS645	1.95
74LS165	.95	74LS670	1.50
		74LS690	1.50

74S00

74S00	.30
74S02	.30
74S03	.30
74S04	.35
74S05	.35
74S08	.65
74S09	.65
74S10	.95
74S11	.95
74S15	.95
74S20	.95
74S22	.95
74S30	.95
74S32	.95
74S38	.95
74S40	.95
74S51	.95
74S64	.95
74S65	.95
74S74	.95
74S86	.95
74S112	.95
74S113	.95
74S114	1.25
74S124	3.65
74S133	.95
74S134	1.25
74S135	1.65
74S136	2.25
74S138	1.25
74S139	1.25
74S140	1.25
74S151	1.25
74S153	1.95
74S157	1.95
74S158	1.95
74S160	1.95
74S161	1.95
74S163	2.95
74S174	2.25
74S175	2.25
74S188	3.55
74S194	2.55
74S195	2.55
74S196	2.55
74S225	7.75
74S240	2.95
74S241	2.95
74S242	2.95
74S243	2.95
74S251	2.25
74S253	2.25
74S257	1.95
74S258	1.95
74S260	1.25
74S280	2.95
74S283	3.95
74S287	3.95
74S288	3.95
74S289	4.95
74S373	3.95
74S374	3.95
74S387	3.95
74S471	4.95
74S472	7.95
74S473	7.95
74S474	9.95
74S475	9.95

MOSS EPROM

2708	5.95
2716-450	3.95
2732-450	5.95
2732-250	6.95
2764-450	7.95
2764-250	9.95
2764-300	9.95
27128-250	25.95
TMS2516	4.95
TMS2716	7.95
TMS2532	5.95

STATIC RAM

2101	2.95
5101	4.95
2114-450	1.95
2114-200	2.15
2147	4.95
6116-4	5.75
6116-3	6.75
6116-2	7.95
6116LP-4	6.75
6116LP-3	6.95
6116LP-2	8.95

SOUND CHIPS

76477	2.95
76489	8.95
AY3-8910	9.95
AY3-8912	12.95



CRYSTALS

32.758khz	1.75
1.0mhz	3.95
1.8432	3.95
2.0	2.95
2.097152	2.95
2.4576	2.95
3.2768	2.95
3.579535	95
4.0	2.95
5.0	2.95
5.0688	2.95
5.185	2.95
5.7143	2.95
6.0	2.95
6.144	2.95
6.5536	2.95
8.0	2.95
10.0	2.95
10.738635	2.95
12.00	2.95
14.31818	2.95
15.0	2.95
16.0	2.95
17.430	2.95
18.0	2.95
18.432	2.95
20.0	2.95
22.1184	2.95
32.0	2.95

1984 IC Master Manual

$79.95 plus $5.00 shipping

DYN. RAM

4116-200	1.95
4116-150	2.25
4116-120	2.95
4164-200	6.75
4164-150	6.95

MISC

8031	24.95
8035	5.95
8039	12.50
8085	14.95
8086	24.95
8087	189.00
8088	24.95
8155	12.95
8212	3.25
8237A	22.95
8250	14.95
8251	9.95
8253	9.95
8255	9.95
8257	5.95
8259	5.95
8279	9.95
8284	9.95
8286	24.95
8288	21.95
8748	55.00
6502	4.95
68000	39.95
Z80ACPU	3.95

GENERAL PURPOSE BOARDS

BLANK BOARD — HOLES ON 100" GRID, No ETCHED CIRCUIT EXCEPT CONTACT FINGER

	No. Contacts	Size	Contact Centers	Price
P 441-1	22/44	4.5" x 6"	.156"	9.95
P 442-1	22/44	4.5" x 9"	.156"	10.95
P 721-1	36/72	4.5" x 6"	.100"	9.95
P 722-1	36/72	4.5" x 9"	.100"	10.95

D— SUBMINIATURE CONNECTORS

Description		Solder Cup		Right Angle PC Mounting		Hood	
		Pin	Socket	Pin	Socket	Grey	Black
Part No.		DXXP	DXXS	RDXXP	RDXXS	DXXCGY	DXXC
Contacts	9	2.05	2.65	3.90	3.20	1.55	----
	15	2.05	3.60	3.70	5.40	1.55	----
	25	2.50	3.25	4.50	4.80	1.55	1.25
	37	4.75	7.10	9.40	10.95	2.95	----
	50	6.00	9.25	----	----	3.50	----

MODEMS

HAYES	IBM PC SMARTMODEM 1200B, Plug-in	449.00
	SMARTCOM II COMMUNICATIONS SOFTWARE	99.00
	SMARTMODEM 300, AUTO ANS/DIAL, 300 BAUD, RS232	199.00
	SMARTMODEM 1200, AUTO ANS/DIAL, 1200 BAUD, RS232	475.00
	SMARTMODEL IIe, 300 BAUD, AUTO ANS/DIAL, Plug-in	249.00
	SMARTCOM I COMMUNICATIONS SOFTWARE	79.00

RESISTORS

¼ WATT 5% CARBON FILM FROM 1 OHM TO 10M OHM

50 pcs	.99	.02 ea
100 pcs	1.89	.019 ea
1000 pcs	9.50	.010 ea
5000 pcs	42.50	.009 ea

½ WATT 5% CARBON FILM

50 pcs	1.25	.025 ea
100 pcs	2.35	.024 ea
1000 pcs	11.50	.012 ea
5000 pcs	52.50	.011 ea

JOYSTICK FOR APPLE II $19.95

Joy Stick for IBM P/C $22.95

8087 MATHEMATICS CO-PROCESSOR $189.00

Apple II/IIe Compatible Disk Drive $139.00

CONTROLLER CARD $44.95

FOR APPLE II & IIe

16K RAM CARD

Compatible with:
DOS 3.3 CP/M
Visicalc. PASCAL
1 YR. WARRANTY

$39.95

VISA MasterCard

Speedy EPROM Programmer for Apple II

$149.00

Programming 2716, 2732, 2732A, 2764, 27128, 2516, 2532, 2564 in 30 seconds, software control programming, no additional hardware required.

New Multichannel Hobby Microwave Antenna System
Freq. Range: 2.1 - 2.7 GHz

Includes:
1. Wide Band Probe With Down Converter
2. 20" White Painted Dish
3. 60' and 3' Coax Cable Set
4. Steel Case 5 - 20 DCV Tuneable Power Supply
5. Mounting Accessories and Instructions

ALL FOR $97.95

IC SOCKETS

WW = WIRE WRAP

	1 - 99	100
8 PIN WW	.55	.45
14 PIN WW	.65	.55
16 PIN WW	.65	.55
18 PIN WW	.89	.79
20 PIN WW	1.00	.90
22 PIN WW	1.15	1.05
24 PIN WW	1.19	1.09
28 PIN WW	1.45	1.35
40 PIN WW	1.89	1.69
LP = LOW PROFILE		
6 PIN LP	.10	.09
8 PIN LP	.12	.10
14 PIN LP	.14	.12
16 PIN LP	.16	.14
18 PIN LP	.18	.16
20 PIN LP	.28	.26
22 PIN LP	.28	.24
24 PIN LP	.30	.26
28 PIN LP	.40	.32
40 PIN LP	.48	.38
64 PIN LP	4.10	

U/V EPROM ERASER
General Industries
$37.50

SUPER COOLING FANS For APPLE WITH SURG $37.50

Build Your IBM™ PC/XT Compatible at Competitive Prices

DEALER AND OEM ARE INVITED

Completed Unassembled System Hardware Only

$1,379

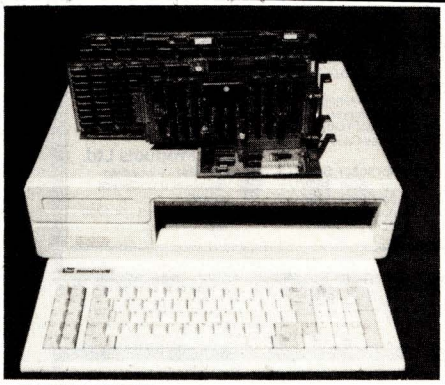

MULTIFUNCTION BOARD
- 2 serial ports, 1 parallel port real time clock, 64k RAM up to 256k RAM 219.00
- Floppy disk drive controller board 119.00
- Hard disk controller board/DTC 5150BX 299.00
- Color graphic board 199.00
- Monochrome + color + graphic board 299.00
- Panasonics disk drive, 320k, half height 129.00
- Hard disk drive 10 MB/Shugart SA712 ..... 549.00
- 100W power supply with fan 129.00
- Case 109.00
- Manual 25.00
- Keyboard 119.00
- High resolution color RGB monitor/Taxan 399.00
- High resolution green monitor/Taxan 119.00
- Monitor stand 19.95
- Hayes 1200B modem 399.00
- Hayes 1200 modem 475.00
- Tandon TM100-2A 160.00
- 64k Memory Expansion Kit 45.00
- 50 5¼ Diskett Store 19.95

MOTHER BOARD:
- 8088 CPU with socket for co-processor 8087
- 8088 is supported by 8259A interrupt controller and 8237 DMA controller
- 2 (two) 28 pin sockets for ROM
- 8 (eight) expansion slots
- No RAM on board (RAM is on multifunction board)

Bare Board 69.00
Ready Board 179.00
(With IC sockets, resistors, capacitors, connectors, crystals, transistors soldered)
Tested Board (w/o ROM) 299.00
IC kit 120.00

IBM is the trademark of International Business Machines.
Prices subject to change without notice.

7400 SERIES CALL FOR PRICE

CAPACITORS
- ★ Ceramic Disc
- ★ Electrolytic
- ★ Tantalum
- ★ Mylar
- ★ Monolithic

TERMS: For shipping include $2.50 for UPS Ground or $3.50 for UPS Blue Label Air. Items over 2 lbs. require additional shipping charges **$10.00 minimum order.** COD Additional $2.00 Fee.
IBM is a trademark of International Business Machines Corporation. Apple is a trademark of Apple Computer.
Price is subject to change without notice.

1-(800) 821-3628

Handwell corp

4962 EL CAMINO REAL • LOS ALTOS, CA 94022 • (415) 962-9265
TELEFAX (415) 962-8249 TXL 171947 HANDWELL LTOS

DATA ACQUISITION
and control for ANY computer



The Model 8232 communicates via RS-232, and has 8 analog inputs (0-5 VDC; 8 bits), 8 digital inputs and outputs, and a 2000 point buffer. Suitable for field data logging or lab use, the 8232 costs only **$540.** Direct bus-connect unit for TRS-80/III & 4 is **$295.** Detailed manual, **$6.** Phone our applications engineer or write:

★★ STARBUCK DATA COMPANY ★★

225 Crescent St., Waltham, MA 02154 • (617) 899-8629

Inquiry 330

EPROM PROGRAMMER



APPROTEK 1000
ONLY
$249.95
COMPLETE WITH PERSONALITY MODULE

117 AC POWER-RS232
-6 BAUD RATES - HANDSHAKE TO HOST
ALLOWS READ, WRITE, VERIFY & COPY
Comes complete with CPM & BASIC Driver Program Listings for most small micros

Full 1 Year Warranty

Programs the following: 5 Volt 24 or 28 pin devices: 27xx series through 27256, 25xx series, 68766 plus others
Specify Personality Module desired with order. Additional Personality Modules only $15.00 ea

TO ORDER: CALL OR WRITE

APROPOS TECHNOLOGY
1071-A AVENIDA ACASO
CAMARILLO, CA 93010
(805) 482-3604

Add $4.00 Shipping-USA
VISA or MC Add 3%

Inquiry 28

Dysan CORPORATION

Solve your disc problems, buy 100% surface tested Dysan diskettes. All orders shipped from stock, within 24 hours. Call toll FREE (800) 235-4137 for prices and information. Visa and Master Card accepted.



PACIFIC EXCHANGES
100 Foothill Blvd.
San Luis Obispo, CA
93401 (In Cal. call (805) 543-1037.)

Inquiry 268

AMX
8086 8088 — 8080 Z80 6809

Real-Time Multitasking Executive

- ROMable (< 3K)
- No royalties
- Source code included
- Language interfaces
- Low interrupt overhead
- Inter-task messages

Options:
- C, Pascal, PL/M, Fortran Interfaces
- CP/M-80 BDOS interface
- IBM PC DOS interface
- Extended memory (> 64K)
- Configuration Builder Utility
- Resource Manager
- Buffer Manager
- Integer Math Library
- Real-Time C Library



AMX General Operation

AMX, AMX86, Real-Time C are TM of KADAK Products Ltd.
Z80 is TM of Zilog Corp.
CP/M-80 is TM of Digital Research Corp.
IBM, PC DOS are TM of IBM Corp.

AMX (for 8080) **$800** U.S.
(for 6809) **$950** U.S.
(for 8086) **$950** U.S.
Manual only **$ 75** U.S.
(specify processor)

KADAK Products Ltd.
206–1847 W. Broadway
Vancouver, B.C., Canada
V6J 1Y5
Telephone: (604) 734-2796
Telex: 04-55670

Inquiry 191



NEW!

SafeSkin
KEYBOARD PROTECTOR

Remains in place during keyboard use. Prevents damage from liquid spills, dust, ashes, etc. Fits like a second skin, excellent feel. Homerow and numeric locators. Available for: IBM-PC, Apple IIe, Radio Shack Model 100, Commodore 64. Send $29.95, check or M.O., Visa & MC include exp. date. Specify computer type. Dealer inquires invited. Free brochure available.

MERRITT Computer Products, Inc.
2925 LBJ, #180 / Dallas, Texas 75234
(214) 942-1142

Inquiry 224

PRINTER RIBBONS

	PRICE PER RIBBON	PER DOZEN
ANADEX 9500	10.50	109.80
APPLE DMP	5.25	52.20
C. ITOH PROWRITER	5.25	52.20
EPSON MX-FX 70/80	5.00	48.00
EPSON MX-FX 100	6.75	69.00
GEMINI 10-10X-15-15X	2.50	23.40
IBM HARMONICA ½"	6.75	78.00
IBM HARMONICA ¾"	7.95	92.40
IBM 4-COLOR	15.75	180.00
IDS MICROPRISM-480	5.75	58.80
IDS PAPER TIGER 460/560	6.75	78.00
IDS PRISM	7.95	92.40
IDS 4-COLOR	15.75	180.00
NEC - 3500 M/S Non Flip	6.25	69.00
NEC - 3500 NYLON	9.00	96.00
NEC PC-8023A	5.25	52.20
OKIDATA 80/82/83/92	2.50	23.40
OKIDATA - 84	5.00	57.00
RADIO SHACK DMP-2100	7.50	87.00
RADIO SHACK LP VI & VIII	5.75	58.80
SILVER REED EX 550 S/S	5.00	57.00
SILVER REED EX 550 NYLON	9.00	105.00
TOSHIBA - 1350	7.50	87.00
XEROX 610/620 M/S	5.95	66.00

Add $3.00 Ship. & Hand. — To Order Call
Toll Free 1-800-742-1122
In MI (313) 569-3218 or Write for our Catalog

DWIGHT COMPANY, INC.
15565 Northland Drive - West Tower
Southfield, Michigan 48075-6496

Inquiry 121

ICs PROMPT DELIVERY!!!
SAME DAY SHIPPING (USUALLY)

8087-3	Co-Processors		$124.97
DYNAMIC RAM			
256K	256Kx1	150 ns	$14.99
64K	64Kx1	120 ns	3.77
64K	64Kx1	150 ns	2.79
64K	64Kx1	200 ns	3.07
EPROM			
27256	32Kx8	300 ns	$36.25
27128	16Kx8	250 ns	13.57
27C64	8Kx8	200 ns	12.47
2764	8Kx8	250 ns	6.50
2732A	4Kx8	250 ns	6.37
2716	2Kx8	450 ns	3.31
STATIC RAM			
6264P-15	8Kx8	150 ns	$19.57
6116P-3	2Kx8	150 ns	4.37

QUANTITY ONE PRICES SHOWN

Open 6½ days: We can ship via Fed-Ex on Sat.

MasterCard/VISA or UPS CASH COD
Factory New, Prime Parts µP∞
MICROPROCESSORS UNLIMITED
24,000 South Peoria Ave.
BEGGS, OK. 74421
(918) 267-4961

Prices shown above are for December 3, 1984
Please call for current prices & volume discount. Prices subject to change. Please expect higher or lower prices on some parts due to supply & demand and our changing costs. Shipping & insurance extra. Cash discount prices shown. Small orders received by 6 PM CST can usually be delivered to you by the next morning, via Federal Express Standard Air @ $6.75!

Inquiry 236

5 Year Warranty
SAVE 50% ON Verbatim. Datalife Diskettes

SPECIAL DISKETTE OFFER

Verbatim Datalife Disks have 6 data-shielding improvements for greater disk durability and longer data life.

PLUS! If you call, write, or utilize reader service in response to this ad—we'll send you our full-range catalog of computer supplies with Special Offers good for further savings on Verbatim diskettes and many other quality products.

Call or write for our discount catalog.

LYBEN COMPUTER SYSTEMS
1250-E Rankin Dr., Troy, MI 48083
Phone: (313) 589-3440

DATALIFE • THE NAME IS THE PROMISE THE WARRANTY IS THE PROOF

Inquiry 210

6809
Single Board Computer



6809 MPU, 2 serial ports, 4 parallel ports, RAM, EPROM, real-time clock, watchdog timer, 44-pin 4.5" × 6.5" PCB
EXPANSION MODULES: RAM, EPROM, CMOS RAM/battery, analog I/O, serial I/O, parallel I/O, counter/timer, IEEE-488, EPROM programmer, floppy disks, cassette, breadboard, keyboard/display.

WINTEK
Wintek Corp.
1801 South Street
Lafayette, IN 47904
317-742-8428

Inquiry 372

A Happy & Prosperous New Year From Computer Connection

For The Best Prices & Service
Call (800) 732-0304

COMPUTER CONNECTION

TOLL FREE ORDER LINE

PRINTERS

OKIDATA
ML82A, 10" Para. & Ser. ..... $ 299
ML83A, 15" Para. & Ser. 535
ML92P, 160 cps 389
ML92 IBM Graphics Comp. 399
ML92S, 160 cps 499
ML92 Apple Mac. 2K Graphics 499
ML93P, 160 cps 599
ML93 IBM Graphics Comp. 629
ML93S, 160 cps 769
ML84P, 200 cps 679
ML84S, 200 cps 779

RITEMAN
Riteman Plus 120 cps w/Tractor .... $ 257
Riteman Blue Plus 140 cps IBM 342
Riteman II 160 cps, 8K mem. w/Trac. 369
Riteman 15, 160 cps, 15" carr. 549

QUME
Letterpro 20P Prop. Spc. Enh Prnt .. $ 567
Sprint 1140+, 2K, 40 cps, 132 col. width 1299

STAR MICRONICS
Gemini 10X, 10", 120 cps ..... $ 249
Gemini 15X, 15", 120 cps 359
Delta 10, 10", 160 cps 365

EPSON
RX80, 120 cps ..... $ 259
RX80FT, Friction & Tractor 289
FX80, 10" 160 cps 445
RX100, 15" Carriage 499
FX100, 160 cps 599
LQ 1500 1095

C. ITOH
Prowriter 8510 AP, 120 cps ..... $ 319
Prowriter 8510 BC2, 120 cps 429
Prowriter 8510 SP, 180 cps 425
Prowriter II 1550 P, 15" 120 cps 527
Prowriter II 1550BCD, 15" 120 cps .. 557
Starwriter F10-40PU, 40 cps 949
Starwriter A10, 18 cps 479
Printmaster F10-55PU, 55 cps 1069

BROTHER
HR25 ..... $ 669

DYNAX
DX15 By Brother, Same as HR15 ... $ 379

JUKI
6100, L.Q. 18 cps w/proportional spc. $ 399

TOSHIBA
P1351 Dot Matrix, 192 cps, letter quality 100 cps, does graphics. 3 in 1 printer $1279
P1340 same as above but 10" carr... 737

PANASONIC
1091 w/Tractor, 120 cps, 1 yr. war. .. $ 299

SOFTWARE

LOTUS DEVELOPMENT CORP.
Lotus 1-2-3 ..... $ 295
Symphony 437

ASHTON TATE
D Base II ..... $ 329
D Base III 419

MICROPRO INTERNATIONAL
ProPak (WS/MM/SS/Star Index) ..... $ 399
Option Pak (M/M, C/S, S/I) 199

MICROSOFT
Softcard (CP/M) ..... $ 239
Microsoft Word 315
Premium Softcard for IIE 319
Softcard for II & II+ 229

PRINTER ACCESSORIES

ORANGE MICRO
Grappler + ... $ 115
Buffered Grappler +, 16K exp. 64K .. 165
Mr. Chips for PC & XT, Par. Ser. Clock & Cal., 64K Realworld I/F, BSR line I/F . 389

TOSHIBA
Bi-Directional Tractor ..... $ 149
Font Disk for Down loading P1351 .. 48

MICROTEK
Dumpling GX (same as Grappler +) $ 75
Dumpling GX w/16K buffer 149
Dumpling GX w/32K buffer 165
Additional Buffering 16K 16

FOURTH DIMENSION
Par. Card & Cable for Apple ..... $ 45

OKIDATA
Plug and Play for IBM ..... $ 35
Okigraph I for 82A 43
Okigraph I for 83A 43
Tractor for 82A & 92 49

CABLES
IBM PC to Parallel Printer ..... $ 18
Serial Cable 18

DISPLAY MONITORS

NEC
JB 1201, 80 col., 20MHz ..... $ 129
JB 1205(A) 12" Amber, 20MHz 135
JC 1215 Color Composit w/audio ... 245
JC 1216 RGB, Hi-Res/IBM 640 x 300 .. 365

AMDEK
V300 ..... $ 135
V300A 139
V310A for IBM PC 169
Color I+, Composite 13" 279
Color II+, Hi-Res. 13"/IBM 389
Color 300 249
Color 600 449
Color 710 595

TAXAN
IBM Green Monochrome #121 ..... $ 139
IBM Amber Monochrome #122 145
RGB IBM w/Cable #420 419
RGB Super Hi-Res. #415 393
RGB/Comp. Med. Res. #210 259

PRINCETON GRAPHICS
HX-12 for use with IBM PC ..... $ 455
Max 12 Amber for IBM 179
SR 12 Super Hi-Res 595

NEW YEAR SPECIALS!!

TOSHIBA P1351 $1279

PRINCTON HX12 $455

PARADISE Modular Graphics Card $279

RANA SYSTEMS Elite I $199

HAYES 1200B $379

MICRO-SCI A.5C Drive for IIc w/Cable $199

ANCHOR Mark XII Hayes Comp. $229

IBM PC w/1 Drive & 64K $1325

C. ITOH F-10 55 $969

IBM PC ACCESSORIES

IBM
IBM Mono Card w/Printer Port ..... $ 235
IBM Mono Monitor 265
IBM Dos 2.1 59
IBM Dos 3.0 75
IBM Tech Ref. for PC 85

PARADISE
Modular GraphicsCard ..... $ 279
Module A 85
Module B 195

PC PEACOCK
Color Graphics Card w/Par. Printer Port, Compat. w/All IBM Software, 2 yr. war. $ 219

AST RESEARCH
Six Pak + w/64K ..... $ 249
Mega Plus II 265

64K MEMORY UPGRADE
64K (9 chips) 150 ns, 1 yr. war. ..... $ 29

QUADRAM
Quad Color 1 Board ..... $ 199

VUTEK
Vutek - CPS Board, RGB & Composite w/Par. & Ser. Ports, 2 Yr. War. ..... $ 239

STB
Graphics + II ..... $ 359

TECHMAR
Graphics Master ..... $ 459

PERSYST BOARD
Bob Hi-Res Display Adp. ..... $ 459

KEYTRONICS
KB5151 ..... $ 185

APPLE & FRANKLIN ACCESSORIES

ACCESSORIES
System Saver ..... $ 69
Fan for Apple II & IIE w/surge 37

APPLE
Super Serial Card ..... $ 139

MICROMAX
Viewmax 128K extended 80 col. card for Apple IIE ..... $ 129
80 col. card for Apple II & II+ 139

MOST ORDERS SHIPPED SAME DAY

PERSONAL SYSTEMS

APPLE
Apple IIE Starter System incl: Apple IIE, Tilt Monitor, 1 Drive w/contoller, 80 col. card. ..... Call
Apple IIc Lightweight Portable 999

IBM
IBM PC Bare w/cont. & keyboard ... $1150
IBM PC 64K, 1 Drive 1325
IBM PC 64K, 2 Drives 1499
IBM PC, 2 Drives w/256K 1599
IBM XT, 128K, 10 Meg., 360K Dr. 3495
IBM AT Base ..... Call
IBM AT Entioneed ..... Call

Call About All "AT" Systems

KAYPRO
Kaypro II $1279
Kaypro 4 1745
Kaypro 10 2395

SANYO
MBC 550-2 w/1 320K Drive & sftwr. .. $ 895
MBC 555-2 w/2 320K Drives & more software 1075
Serial Port for Sanyo 75

TAVA
TAVA PC1 Par. & 1 Ser. Ports, 128K, 2-320K Drives, Color Card & Monitor $1499
TAVA XT same as above including 10 meg. Hard Disk Drive $2495

COMPAQ
256K, w/2-320K Drives $2150

DISK DRIVES

TANDON
TM100-2 for IBM PC ..... $ 145
TM65-2, ½ Height, 320K 189

ALPHA OMEGA
10 Meg HD for IBM & Comp. w/Cont. Card 13 Month Warranty ..... $ 875

TEAC
55B Double Sided 360K .... $ 135 2 for 255
Quad Density 189

PANASONIC
1/2 Height, 360K ..... $ 139

Drives For Apple & Franklin

RANA SYSTEMS
Elite I ..... $ 199
Elite II 339
Elite III 399
Controller add 85

MICRO-SCI
A-2 ..... $ 179
A.5C for IIc w/cable 199
A.5 ½ height for IIE 209
Controller Add 70

MODEMS

ANCHOR
Mark XII ..... $ 229

HAYES MICRO
300 Baud Smart Modem ..... $ 205
1200 Baud Smart Modem 459
1200 B for IBM PC 379
Micro Modem IIE 259
Chronograph 189

COMPUTER CONNECTION

GIVE US A CHANCE TO BEAT THE COMPETITION'S ADVERTISED PRICE.

IF YOU SEE IT ADVERTISED FOR LESS, CALL COMPUTER CONNECTION FIRST FOR LOWEST QUOTE!

MAIL ORDER:
12841 S. Hawthorne Blvd., No. 585
Hawthorne, California 90250

VISA MasterCard

NO SURCHARGE FOR CREDIT CARDS

We accept VISA, MasterCard, COD (w/deposit), Certified Checks or Wire Transfers. Minimum Shipping Charge $4.00. Some items subject to back order. California Res. add 6½% Sales Tax. Prices subject to change without notice.

ORDER LINE
(800) 732-0304
[Outside California]
(213) 514-9019
[Inside California]
Mon.-Fri. 7 a.m. to 6 p.m.
Saturday 11 a.m. to 3 p.m.

CUSTOMER SERVICE:
(213) 514-9019
Mon.-Fri. 9 a.m. to 3 p.m.

Erases Most Eproms in 3 Minutes



Solid State 2-8 Min. Timer Version $54.95

For all 24 or 28 Pin Devices

90-DAY WARRANTEE

DEALER INQUIRIES WELCOME

SHIPPING & HANDLING $2.50

AZ RESIDENTS ADD 6% TAX

WALLING CO.

4401 S. JUNIPER • TEMPE, AZ 85282 • (602) 838-1277

Inquiry 368

MEMOREX
FLEXIBLE DISCS

WE WILL NOT BE UNDERSOLD!! Call Free **(800)235-4137** for prices and information. Dealer inquiries invited and C.O.D.'s accepted.



VISA

PACIFIC EXCHANGES
100 Foothill Blvd.
San Luis Obispo, CA 93401. In Cal. call (800)592-5935 or (805)543-1037

Inquiry 268

WRITE

For creative and report writing. Includes many features missing from WordStar, such as alphabetized directory listings, fast scrolling, and trial printing to the screen. Write is $239.

Software Essentials

This package contains a word processor, printer program, database programs, and more for $124. For all MS-DOS and IBM PC compatibles.

Workman & Associates

112 Marion Avenue Pasadena, CA 91106
(818) 796-4401
Please request our new catalog.

Inquiry 373

Quelo™ 68000 Assembler

New 5.0 Release — First Commercial Release January, 1983

The **Quelo**™ portable 68000 assembler conforms to the Motorola resident assembler, publication M68KMASM[D4].

Quelo™ 68000 Assembler Package Features:

Input file concatenation, include function, macros, global parameter substitution from command line, listing date-time stamp, up to 31 character symbols, conditional assembly, structured programming directives, instruction optimization, 68010 instructions, relocation and linking, complex expression linking (all operators), DB-DW-DL directives for Z80 byte order data generation, object library utility, software configuration tracking, conditional linking, options for assembler and linker to write complete symbol table to a file, detailed symbol table listings, assembler symbol cross-reference, linker global symbol cross-reference, object library symbol cross-reference, superb linker load map, various HEX load formats produced by linker, error messages in English, extensive typeset manual with index, readily transported to any system with a C compiler and "UNIX like" system interface.

Ready to run in various disk formats for **CP/M-80, -86, -68K, MS-DOS and PC-DOS**	$595
Portable source version with detailed installation and testing instructions.	$750 **Limited time only.**

For more information or to order write or call:
Patrick Adams
COD, Visa, MasterCard.

Quelo™
2464 33rd Ave. W., Suite #173
Seattle, WA 98119
Phone (206) 285-2528
telex (TWX) 9103338171

CP/M-80, CP/M-86, CP/M-68K TM DRI. UNIX TM Bell Labs. MS-DOS TM Microsoft. PC-DOS TM IBM.

Inquiry 294

IN STOCK **MODEMS** 2 DAY SHIP

★ Hayes Compatible ★
★ Free Communications Software ★

HAYES 1200	★$449
U.S ROBOTICS..... Password 300/1200 Auto A/D w/cables, spkr	★$314
ANCHOR AUTOMATION..... SIGNALMAN	
Mark I 300 Baud	$ 69
Mark X 300 Baud Auto A/D	★$119
Mark XII 1200/300 Auto A/D	★$239
QUBIE'	
Internal 300/1200 Auto A/D	★$269
External 300/1200 Auto A/D	★$289

DIRECT CONNECT DEVICES
P.O. Box 13256, San Luis Obispo, CA 93406

CALL FOR FREE CATALOG — VISA — CALL TO ORDER: (805) 543-6308

Dealer Inquiries Invited

Inquiry 109

Electronic Circuit Analysis

- New release
- Transient, AC, DC analysis
- Full nonlinear
- Over 200 nodes
- Full editing
- Macro circuits
- Worst case, Monte-Carlo
- Temperature effects
- Frequency dependent parts
- Time dependent parts

For MS-DOS. 128k minimum.
$395.00

Tatum Labs
P.O. Box 698
Sandy Hook, CT 06482
(203) 426-2184

Inquiry 346

HARD DISK BOOT + DATA SECURITY

FiXT ends boot hassles, stops data thieves—

DATAMAC, DAVONG, GREAT LAKES, IOMEGA, XEBEC, ZOBEX, others.

No-Slot Installation for IBM PC, COMPAQ, COLUMBIA

$70 - $95 + tax/shpg



GOLDEN BOW SYSTEMS
Box 3039
San Diego
CA 92103
619/298-9349

Inquiry 151

VT100
$150.*

*plus your IBM PC or compatible

Use your IBM PC as a DEC VT100 with ZSTEMpc-VT100 smart terminal emulator
132 columns by windowing — no additional hardware
Double High/Double Wide Characters
Complete VT100 line graphics
Smooth scrolling
Full keyboard softkeys / MACROS
Bidirectional file transfers — including XMODEM
Speeds to 38.4KB. High throughput.

ZSTEM Communications Division
KEA SYSTEMS LTD.
#412 - 2150 W. Broadway
Vancouver, B.C.
CANADA V6K 4L9
(604) 732-7411

Inquiry 375

For the NEC PC 8201;
EXPAND! **SIDECAR/$349.**
32K Memory Cartridge, expandable to 128K

32K ROM SPREADSHEET/$88.
For the NEC PC 8201, TRS 80 Model 100 and the Olivetti M10;

8K MEMORY MODULE/ $49.95 each

- **Simple installation instructions included.**
- **30 day satisfaction guarantee or your money back.**
- **1 year warranty.**
- **Prompt shipment via UPS.**

Shipping: from stock. Free UPS surface 2 day air - add $4.00 Continental USA, add $7.00 Canada. **Payment:** Visa, M/C, American Express. Checks held 14 days. COD add $5.00. **Tax:** 6% (California only).

PURPLE COMPUTING
2068 Ventura Blvd.
Camarillo, CA 93010

(800) 732-5012
Inside California (805) 987-4788

Inquiry 289

ADVANCED COMPUTER PRODUCTS, INC.

SINCE 1976

1985 CATALOG Send $1.00

1985

$5,000,000 SALE CELEBRATION
SAVE NOW AT NEW LOW PRICES!
9th Year Anniversary SALE!

IF YOU DON'T SEE IT HERE CALL TOLL FREE

Corporate Buyers ... Call For Volume Quotes!

MAIL ORDER PRICING ONLY

APPLE COMPATIBLE PERIPHERALS

ALS CP/M 3.0 PLUS CARD...SALE	$199.00	BUFFERED GRAPPLER	$349.95
COEX 16K RAM CARD...SALE	39.95	GRAPPLER SUPER SERIAL...SALE	$119.95
COEX PAR. PRINTER CARD w/CABLE	49.95	VIDEO 7 RGB IIc I/O	189.95
COEX 80 COL EXT 64K CARD...SALE	99.95	APPLE IIc SERIAL CABLE	36.95
IS PKASO I/O (II,IIe)	139.95	APPLE IIe KEYBOARD	49.95
KENNSINGTON SYSTEM SAVER	69.95	APPLE II/IIe POWER SUPPLY	59.95
KENNSINGTON PC SAVER	39.95	APPLE II/IIe DISK CONTROLLER	49.95
KRAFT JOYSTICK	36.95	APPLE II/IIe COOLING FAN SYSTEM	49.95
MCT SPEED DEMON	249.95	STREET ECHO II SPEECH SYSTEM	99.95
MICROSOFT Z-80 SOFTCARD	247.95	TITAN ACCELERATOR II CARD	449.95
GRAPPLER PLUS	119.95	WIZARD 80 COLUMN CARD...SALE	99.00

FARADAY IBM PC®
Compatible CPU Board w/64K, MS DOS
$349.95

MOST MAJOR LINES IN STOCK CALL TOLL FREE

IBM PC HARDWARE

AST "COMBOPLUS" 64K	$199.00	KEYTRONIC 5150/51	158.00/199.00
SIGMA "MAXIMIZER" 64K	249.95	MOUSE SYSTEMS MOUSE W/SW	149.95
SIGMA DISK CONTROLLER	169.95	QUADBOARD W/64K	263.00
HARD DISK CONTROLLER	249.95	TECMAR GRAPHICS MASTER	545.00
10 Mb INTERNAL HARD DISK	795.00	TECMAR CAPTAIN 64K	319.00
10 Mb EXTERNAL HARD DISK	895.00	CURTIS PC PEDESTAL	39.00
15 Mb INTERNAL HARD DISK	995.00	PGS or QUADCHROME ADAPTOR	9.00
15 Mb EXTERNAL HARD DISK	1095.00	TILT and SWIVEL STAND	21.00
80 WATT BOOSTER SUPPLY	149.95	SYSTEM STAND	21.00
130 WATT IBM SUPPLY	174.95	EXTENSION CABLE IBM MONO	38.00
PC COMPATIBLE KEYBOARD	99.00	KEYBOARD EXTENSION CABLE	28.00
IBM PC CHASSIS	129.95	SURGE SURPRESSORS:	
PLANTRONICS "COLORPLUS"	389.95	DIAMOND (LEMON)	39.00
10 Mb INT. TAPE STREAMER	1150.00	EMERALD (LIME)	49.00
PERSYST MONO CARD	199.00	SAPPHIRE (PEACH)	59.00
PARADISE MONO/COLOR	409.95	RUBY (ORANGE)	69.00
HERCULES MONO CARD	389.00		

PRINTERS

BROTHER HR-15P/S (13cps)	SALE	$399.00
BROTHER HR-25P/S (23cps)	SALE	699.00
BROTHER HR-35P/S (36cps)		979.00
NEW! BROTHER M2024 (24pin)		1299.00
COEX 80F/T (80cps)	SALE	149.00
EPSON RX-80/80FT (100cps)	SAVE	150.00
EPSON MX-80FT (80cps)	SAVE	150.00
EPSON FX-80 (160cps)	SAVE	150.00
EPSON FX-100 (160cps)	SAVE	150.00
MACINTOSH or IIc SERIAL I/O		115.00
OKIDATA 92P (160cps)	SALE	399.95
OKIDATA 93P (160cps)		629.95
OKIDATA 84P (200cps)		799.00
OKIDATA 2350P (350cps)		1895.00
TOSHIBA P1351 (24pin)		1295.00
STAR GEMINI 10X (120cps)		289.00
STAR GEMINI 10XPC		329.00
STAR GEMINI 15X		379.00
STAR GEMINI 15XPC		449.00
SPECIAL STAR STX-80 THERMAL		129.00
NEC 8027A PORTABLE PRINTER		399.00
PANASONIC 1091	SALE	359.00

MONITORS

AMDEK 300G (GREEN)	$139.95
AMDEK 300A (AMBER)	149.95
AMDEK 310A (IBM AMBER)	169.95
CALL FOR COLOR I & NEW MODELS	
PGS HX-12 (IBM COLOR)	469.95
PGS SR-12 (HI-RES)	649.95
PGS MAX-12 (IBM GREEN)	198.95
PGS DOUBLER BOARD	227.00
TAXAN 420 (HI-RES IBM)	399.00
ZENITH 122A/123G	89.95
ZENITH ZVM131/135	Call
SANYO 6500 (MED-RES)	279.00
SANYO 7500 (HI-RES)	379.00
SANYO (LOOKALIKE) 12" AMBER SALE	74.95

MODEMS

BIZCOMP "PC INTELLIMODEM" (INT)	$349.95
HAYES SMARTMODEM 1200 (EXT)	499.95
HAYES SMARTMODEM 1200B (INT)	429.95
HAYES SMARTMODEM 300 (EXT)	229.95
MICROMODEM APPLE IIe	249.95
PROMETHEUS 1200M (MACINTOSH)	469.95
PROMETHEUS 1200 (PC EXT)	359.95
NOVATION ACCESS 1-2-3	389.95
CAT COMMUNICATIONS SYSTEM	419.95
APPLE COMP. LOW COST MODEM (300)	49.95

HARD DISKS

SEAGATE ST506 5Mb	$299.00
CMI 10Mb	Call
CMI 15Mb	Call
CMI 22Mb	Call
RODIME 10Mb	Call
RODIME 15Mb	Call
CALL FOR QUOTE ON HIGHER CAPACITY HARD DRIVES!	

SUPER SAVER HARD DISK
5Mb $199.00
NEW FACTORY DIRECT
NO RETURNS AT THIS PRICE

DISK DRIVES

TEAC 55B	$149.95
MITSUBISHI 4851	149.95
SHUGART 455	159.95
TANDON TM100-2	169.95
8" DISK DRIVES	
SHUGART 801R	$269.95
SIEMENS FDD100-8	129.95
SIEMENS FDD200-8 DS/DD	195.00
MITS M2894	439.95
MITS M2896 ½Ht.	439.95
TANDON 848E ½Ht.	369.95
QUME 242 ½Ht.	399.95

DRIVE CABINETS

5¼" CASE POWER SUPPLY	$69.95
5¼" DUAL ½Ht. w/POWER SUPPLY	79.95
8" DUAL CASE w/POWER SUPPLY	279.95
8" THINLINE DUAL w/POWER SUPPLY	199.95
5¼" HARD DISK w/POWER SUPPLY	199.95
5¼" ½ HIGH HARD DISK	199.95

APPLE DISK DRIVES

APPLE II/IIe COMPATIBLE	$174.95
APPLE II/IIe COMPATIBLE ½ HIGH	164.95
MICROSCI APPLE IIc DRIVE	219.95
APPLE II to APPLE IIc ADAPTOR	19.95
APPLE II/IIe DISK CONTROLLER	49.95

NOTICE TO DEALERS -- We Will Pay Top Dollar For Your Excess Inventory

S-100 SALE ITEMS

64K STATIC RAMCARD $199.95
PLUS MAJOR OEM PURCHASE WHILE SUPPLY LASTS
ALL NEW, SOME W/O DOCUMENTATION

• SMART BOARD	SALE	99.95
• FRONT PANEL BD (IMSAI)	SALE	79.95
• 8080 MPU BOARD	SALE	49.95
• 8" FLOPPY CONTROLLER (Morrow)		149.95
• S-100 EXTENDER CARD		24.95

CAPACITORS

01uF DISC BYPASS CAPACITOR	100/$5.50
1 uF DISC BYPASS CAPACITOR	100/6.50
01uF MONOLITHIC CAPACITOR	100/11.25
1 uF MONOLITHIC CAPACITOR	100/14.25

TRANSISTORS/DIODES

PN2222A	7/$1.00	2N3904	11/$1.00
PN2369A	5/1.00	2N3906	11/1.00
PN918	3/1.00	TIP29A	2/1.00
2N2218A	.45	TIP30A	2/1.00
2N2219A	.45	TIP31A	2/1.25
2N2905	.45	TIP32A	2/1.25
2N2907	.25	1N4148	25/1.00
2N3055	.69	1N751	5/1.00
2N3565	4/1.00	1N4002	12/1.00
2N3638	4/1.00	1N4004	10/1.00
2N3772	1.69		

OPTO ISOLATORS

MCT-2	$ .59	4N33	$ .89
MCT-6	1.39	4N35	1.25
MCT-66	.55	4N37	1.25
MCA-255	1.69	4N38	.98
4N26	.55	TIL117	.79
4N27	.65	SPX33	.29
4N28	.69		

LED LAMPS

	1-99	100
Jumbo Red	$ .09	$ .08
Jumbo Green	.17	.15
Jumbo Yellow	.17	.15
Mini Size Red	.10	.09
Mini Size Green	.19	.16
Mini Size Yellow	.19	.16

EDGE CONNECTORS

	1-99	100
S-100 ST	$3.95	$3.25
S-100 WW	4.75	4.10
44 Pin ST	2.75	2.60
44 Pin WW	4.75	4.25
72 Pin ST	8.50	6.10
72 Pin WW	7.25	6.95

D-SUBMINIATURE

	1-24	25
DB25S (Female	$3.10	$2.90
DB25P (Male)	2.40	2.29
Hood $1.25	Mtg H/W $ .99	
DE37S (Female)	$5.95	$5.75
DE37P (Male)	5.25	5.10
Hood $1.75	Mtg H/W $ .99	
DD50S (Female)	$8.95	$8.65
DD50P (Male)	6.00	5.75
Hood $3.25	Mtg H/W $ .99	

(OTHER STYLES IN CATALOG)

CENTRONICS

IDC 36 Pin Male	$8.95
IDC 36 Pin Female	9.49
Solder 36 Pin Male	7.49
Solder 36 Pin Female	8.95

(CALL TOLL FREE FOR IDC's)

IC SOCKETS

	1-99	100
SOLDERTAIL		
8 Pin ST/LP	$ .13	$ .10
14 Pin ST/LP	.15	.11
16 Pin ST/LP	.17	.12
18 Pin ST/LP	.20	.17
20 Pin ST/LP	.28	.26
22 Pin ST/LP	.29	.27
24 Pin ST/LP	.29	.27
28 Pin ST/LP	.39	.32
36 Pin ST/LP	.45	.36
40 Pin ST/LP	.48	.42
64 Pin ST/LP	3.95	3.25
WIREWRAP (GOLD)	1-99	100
8 Pin WW/3L	$ .49	$ .40
14 Pin WW/3L	.62	.49
16 Pin WW/3L	.65	.55
18 Pin WW/3L	.88	.77
20 Pin WW/3L	.99	.96
22 Pin WW/3L	1.19	1.13
24 Pin WW/3L	1.25	1.17
28 Pin WW/3L	1.49	1.39
40 Pin WW/3L	1.89	1.75

TEXTOOL/ZIF ZERO INSERTION
16 Pin $6.75 24 Pin $7.85 28 Pin $8.95
(We Stock All Types of Sockets)

6800

68000	$48.95	6810	$ 2.85	6850	$ 3.25
68000L10	69.95	6820	3.75	6852	5.65
6800	2.90	6821	2.90	6860	7.90
6802	7.75	6828	14.50	6875	6.75
6803	18.95	6840	12.75	6880	2.20
6809E	14.50	**(CALL FOR 6800B FAMILY)**			

6500

6502	$4.50	6504	$6.75	6522	$6.75
6502A	6.90	6507	9.75	6532	9.50
6502B	9.50	6520	4.25	6551	11.50

8000

8035	$ 5.75	8214	$ 3.75	8259	$ 6.75
8039	5.75	8216	1.95	8271	69.95
8080A	2.95	8224	2.20	8275	26.95
8085A	4.90	8226	1.95	8279	8.75
80C85A	9.95	8228	3.40	8282	6.25
8086	24.50	8237	14.75	8283	6.25
8087	169.95	8237-5	18.95	8284	5.50
8088	29.50	8238	4.25	8286	6.45
8089	88.95	8243	3.95	8287	6.45
8155	6.75	8250	10.50	8288	14.95
8156	6.75	8251	4.25	8289	44.95
8185	26.95	8251A	6.95	8292	12.95
8202	23.95	8253	6.75	8741	27.95
8203	37.95	8255	4.25	8748	24.50
8205	3.25	8255A	6.95	8749	24.50
8212	1.95	8257	5.75	8755A	34.95

Z-80

	2.5MHz	"A" 4.0MHz	"B" 6.0MHz
Z80-CPU	3.75	4.35	9.50
Z80-CTC	3.75	4.75	12.25
Z80-DART	—	9.50	17.95
Z80-DMA	12.95	11.95	17.95
Z80-PIO	3.75	4.25	12.50
Z80-SIO/0	11.25	12.25	—
Z80-SIO/1	11.95	12.75	—
Z80-SIO/2	11.95	12.75	36.95
Z80-SIO/9	11.95	12.75	—

Z8030	$34.95	Z8001	$34.95	Z6132	$32.95
Z8530	34.95	Z8002	34.95	Z8671	37.95

DISK CONTROLLERS

uPD765	$24.95	1797	$29.95	6843	$32.95
1771	15.95	2791	49.95	8272	24.95
1791	24.75	2793	49.95	1691	11.95
1793	26.50	2795	49.95	2143	12.95
1795	26.50	2797	49.95	9216	12.95

CRT CONTROLLERS

6845	$14.74	8275	$28.50	TMS9918	$39.50
68845	17.95	7220	39.95	8350	39.95
6847	11.50	5027	17.95	6545	21.50
46505	14.75	5037	21.95	8002	19.95
68047	24.50				

UARTS/USARTS

1602B	$3.95	2350	$ 8.95	IM6403	$ 8.75
1013A	3.95	8250	10.50	TMS5501	14.95
1015A	6.75	IM6402	7.75	2651	8.95

EPROMS

1702 (1mS)	$ 3.90	2732A-4 (450nS)	$ 6.50
2708 (450nS)	3.65	2732A (250nS)	8.95
2758 (5V)	5.50	2732A-2 (200nS)	12.50
2716 (450nS)	3.75	2764 (450nS)	6.50
2716 (350nS)	5.50	2764 (250nS)	7.50
2516 (5V)	5.50	2764 (200nS)	17.50
TMS2716	7.50	TMS2564 (450nS)	12.95
TMS2532	5.60	MCM68764 (450nS)	34.95
2732 (450nS)	4.60	MCM68766 (350nS)	39.95
2732 (250nS)	8.25	27128-3 (300nS)	21.50
2732 (200nS)	10.95	27128 (250nS)	22.95
CMOS EPROMS		27C32	$22.95
27C16	$17.95	27C64	26.95

STATIC RAMS

2101 (450nS)	$2.29	MK4118	$4.95
21L02 (450nS)	.99	TMM2016-2 (200nS)	4.10
2102-1 (450nS)	.79	TMM2016-15 (150n)	4.95
21L02-2 (250nS)	1.39	TMM2016-1 (100nS)	6.10
2111 (450nS)	2.75	HM6116P-4 (200nS)	4.75
2112 (450nS)	2.75	HM6116P-3 (150nS)	4.95
2114 (450nS)	1.45 8/9.50	HM6116P-2 (120nS)	8.85
2114L-4 (450n)	1.69 8/12.50	HM6116LP-4 (LP)	5.90
2114L-3 (300n)	1.79 8/13.30	HM6116LP-3 (LP)	6.75
2114L-2 (200n)	1.89 8/13.90	HM6116LP-2 (LP)	9.95
2147 (55nS)	4.50	Z6132 (300nS)	32.95
4044-4 (450nS)	3.25	HM6264P-15 (150)	32.95
4044-3 (300nS)	3.75	HM6264LP-15 (LP)	36.95
4044-2 (200nS)	4.35	74S189 (35nS)	1.85
UPD410 (100nS)	3.75	93415 (50nS)	3.95
5101 (CMOS)	3.50	93425 (50nS)	3.95

DYNAMIC RAMS

4027 (250nS)	$1.29	TMS4416 (150nS)	$9.75
1103 (300nS)	.79	41256-150 (150n)	29.95
4116N-2 (150nS)	1.80 8/13.95	41256-200 (200n)	24.95
4116N-3 (200nS)	1.65 8/12.50	TMS4050 (300nS)	1.85
4118N-4 (250nS)	1.45 8/10.50	TMS4060 (300nS)	1.85
4164N-150 (150n)	5.95 9/44.95	MM5280 (300nS)	1.85
4164N-200 (200n)	4.95 9/39.50	UPD411 (300nS)	1.85
4164N-120 (120nS)	8.49	MM5298 (250nS)	1.85
TMS4164 (150nS)	7.95		

COEX 80F/T PRINTER



- 9x7 Dot Matrix, 80cps. Bi-directional Printing
- 2K Buffered Memory
- 80, 96, 132 Columns, Graphics and Block Printing
- Selectable Car Pitch, Line Spacing and Feed

COEX Interface Card to Apple **$49.95**

$149.95

SUPER SAVER
IBM PC®
Comp. DS/DD Disk Drive
$124.95

HI-TECH SPECIALS
TMS99532NL
300 BAUD MODEM IC
$14.95

DATA AQUISITION

ADC0800	$14.95	ADC0817	$9.75	1408L6	$1.95
ADC0804	3.45	DAC0800	4.75	1408L8	2.85
DAC0806	1.90	DAC0808	2.85	DAC100	7.95
ADC0809	4.45	DAC1020	7.95	DAC08	7.95
ADC0816	14.25	DAC1022	5.85	DAC01	6.95

LINEAR

LM108AH	$3.95	NE590	$2.45	LM3914	$2.95
LM300H	.99	NE592	2.70	LM3915	2.95
LM301N	.35	LM709N	.55	LM3916	2.95
LM304H	1.89	LM709H	1.90	MC4024	3.75
LM305H	.95	LM710	.68	MC4044	4.35
LM306H	4.75	LM711	.75	RC4131	3.75
LM307N	.40	LM715	3.95	RC4136	1.19
LM308CN	.65	LM723N	.55	RC4151	3.75
LM310CN	1.65	LM723H	.75	CA3023	2.75
LM311CN	.62	LM733	.98	CA3039	1.25
LM312H	1.75	LM739	1.85	CA3046	1.25
LM318CN	1.45	LM741CN	.33	CA3059	2.85
LM318H	1.55	LM741H	.40	CA3060	2.85
LM319N	1.19	LM741N	.29	CA3065	1.69
LM320 (see VRs)		LM747	.65	CA3080	1.10
LM324N	.55	LM748	.55	CA3081	1.60
LM339N	.95	LM1014	1.15	CA3082	1.60
LM340 (see VRs)		LM1303	1.90	CA3083	1.55
LM348N	.95	LM1310	1.45	CA3086	.80
LM358CN	.65	MC1330	1.65	CA3089	2.95
LM359	1.75	MC1349	1.85	CA3096	3.45
LM360N	2.95	MC1350	1.15	CA3130	1.29
LM370N	4.95	MC1358	1.65	CA3140	1.15
LM373N	3.95	MC1372	6.75	CA3146	1.79
LM376N	3.75	LM1414	1.55	CA3160	1.49
LM377N	1.90	LM1558H	2.99	LM13080	1.25
LM380CN	1.05	LM1800	2.35	LM13600	1.45
LM380N	1.05	LM1812	8.10	LM13700	1.45
LM381N	1.59	LM1830	3.40	LF347	2.19
LM382N	1.35	LM1871	5.45	LF351	.60
LM383N	1.95	LM1872	5.45	LF353	.99
LM384N	1.75	LM1877	3.20	LF355	1.10
LM386N	.89	LM1889	1.90	LF356	1.10
LM387N	1.29	LM1896	1.70	LF357	1.39
LM389N	1.15	ULN2001	1.95	TL071CP	.79
LM392N	.69	ULN2003	1.49	TL072CP	1.35
LM723N	.48	XR2206	3.75	TL074CN	1.90
LM723H	.55	XR2207	2.90	TL081CP	.59
NE531	2.85	XR2208	2.40	TL084CN	1.90
NE555	.35	XR2211	3.75	TL494	4.10
NE556	.65	LM2877P	2.00	TL496	1.65
NE558	1.49	LM2878P	2.25	TL497	3.20
NE561	23.50	LM2900	.83	MC3423	1.49
NE564	2.85	LM2901	.49	MC3453	4.95
LM565	.95	LM2907	2.45	MC3456	1.29
LM566	1.45	LM2917	2.85	MC3459	3.75
LM567	.85	LM3900	.55	MC3469	5.25
Ne570	3.85	LM3905	1.15	MC3470	7.95
NE571	2.90	LM3909	.98		

VOLTAGE REGULATORS

7805T Also		7905K Also	
8, 12, 15, 24V	.69	12, 15, 24V	1.39
78L05, 12, 15V	.65	79L05, 12, 15V	.75
78M06C	.89	LM309K	1.25
78MG/79MG	1.49	LM317K	3.85
78H05KC	8.75	LM323K	4.85
7805K Also		LM337K	3.75
12, 15, 24V	1.29	LM338K	6.75
7905T Also		LM350T	4.55
8, 12, 15, 24V	.79	LM350K	4.75

SPECIAL PURPOSE CHIPS

MC14411	$11.50	58174	$11.25	95H90	$ 9.25
BR1480	11.50	5832	3.75	76477	3.75
34702	12.50	AY52376	11.50	76488	5.75
5016	14.95	AY53600	11.50	76489	8.75
8116	10.50	2513-001U	9.50	AY38910	11.95
5307	10.50	2513-002L	9.50	AY38912	11.95
MC4024	3.75	UPD7201	27.95	SSI-263	36.95
8038	3.75	3341	4.50	Votrax	39.95
5369	3.50	11C90	13.25	Digitalker	34.95
58167	12.25				

DISKETTES

"IBM PC®" DS/DD	**$1.19ea/1000**
Hub Rings	**$1.35ea/250**
Tyvac Cover	
Major Mfgr.	**$1.55ea/25**

5¼" DISKETTES	Box 10
VERBATIM 525-01 SS/DD	$19.95
VERBATIM 550-01 DS/DD	29.95
MAXELL MD-1 SS/DD	19.95
MAXELL MD-2 DS/DD	29.95
DYSAN 104/1D SS/DD	26.95
DYSAN 104/2D DS/DD	33.95
GENERIC SS/SS	15.95
GENERIC DS/DD	17.95
3½" DISKETTES (MAC, etc)	44.95
5¼" HEAD CLEANING KIT	11.95
8" HEAD CLEANING KIT	11.95
DYMEC IBM PC DIAGNOSTIC	29.95
APPLE II DIAGNOSTIC DISK	29.95
MACINTOSH DISKETTE HOLDER	16.95
5¼" DISKETTE HOLDER (50)	16.95

EXPANSION MEMORY

64K UPGRADE (Set of 9) **$39.95**
256K RAMS (256Kx1) **$24.95**

CABLES/ACCESSORIES

IBM PARALLEL (Shielded)	$29.95
IBM SERIAL (Shielded)	24.95
KEYBOARD EXTENSION	9.95
RS232 GENDER CHANGER Male-Male	14.95
RS232 GENDER CHANGER Female-Female	14.95
NULL MODEM ADAPTOR	14.95

SPECIALS OF THE MONTH

FARADAY 6400/64K MS-DOS Motherboard	$349.95
PERFECT AB Switch (Parallel)	69.95
TELEDATA Modem for VIC20/64	49.95
APPLE IIe Keyboard	49.95
IBM PC Compatible Keyboard	99.95
SANYO 555 MS-DOS Computer	799.00
DEC "Rainbow 100A" (3245 list)	1699.00
DEC "Rainbow 100+" (5475 list)	3499.00
5Mb Winchester Upgrade DEC	775.00
NEC8201 Portable Computer	449.00
ZENITH Z151 100% PC Compatible Computer	1995.00
SANYO (Silver Reed 500) LQ Printer	299.00
"DEADLINE" Atari Software (49.95 list)	9.95
VISICALC IIe Advanced	149.95

7400

7400	$ .19	7446	$ .68	74123	$ .45	74176	$ .69
7401	.19	7447	.65	74125	.42	74177	.69
7402	.19	7448	.68	74126	.44	74179	1.34
7403	.19	7450	.19	74128	.49	74180	.75
7404	.19	7451	.19	74132	.45	74181	1.75
7405	.23	7453	.19	74136	.75	74182	1.15
7406	.49	7454	.19	74141	.85	74184	2.25
7407	.49	7459	.25	74142	2.95	74185	2.25
7408	.24	7460	.37	74143	3.70	74190	.67
7409	.19	7470	.29	74144	2.95	74191	.67
7410	.19	7472	.29	74145	.59	74192	.67
7411	.24	7473	.33	74147	1.49	74193	.67
7412	.38	7474	.34	74148	1.19	74194	.67
7413	.34	7475	.38	74150	1.09	74195	.67
7414	.49	7476	.34	74151	.55	74196	.75
7416	.49	7479	4.60	74152	.55	74197	.86
7417	.49	7480	.69	74153	.53	74198	1.15
7420	.19	7482	.95	74154	1.19	74199	1.15
7421	.35	7483	.45	74155	.69	74221	1.19
7422	.45	7485	.55	74156	.59	74251	.75
7423	.58	7486	.35	74157	.59	74273	1.65
7425	.29	7489	1.95	74158	1.65	74276	1.89
7426	.29	7490	.35	74159	1.58	74279	.75
7427	.25	7491	.65	74160	.79	74283	1.40
7428	.55	7492	.45	74161	.69	74284	2.90
7430	.18	7493	.35	74162	.69	74285	2.90
7432	.29	7494	.85	74163	.69	74290	1.49
7437	.25	7495	.50	74164	.69	74298	1.49
7438	.29	7496	.69	74165	.69	74365	.55
7439	.58	7497	2.70	74166	.85	74366	.55
7440	.19	74100	1.50	74167	2.75	74367	.55
7441	.79	74107	.24	74170	1.25	74368	.55
7442	.45	74109	.37	74172	7.75	74390	1.45
7443	1.15	74116	1.45	74173	.69	74393	1.33
7444	1.15	74121	.29	74174	.69	74490	2.25
7445	.68	74122	.44	74175	.69		

74LS00

74LS00	$ .26	74LS113	$ .38	74LS247	$ .74		
74LS01	.25	74LS114	.39	74LS248	.98		
74LS02	.25	74LS122	.45	74LS249	.98		
74LS03	.25	74LS123	.95	74LS251	.59		
74LS04	.33	74LS124	2.75	74LS253	.59		
74LS05	.25	74LS125	.49	74LS257	.59		
74LS08	.27	74LS126	.49	74LS258	.59		
74LS09	.28	74LS132	.59	74LS259	2.95		
74LS10	.25	74LS136	.39	74LS260	.59		
74LS11	.33	74LS138	.59	74LS261	2.49		
74LS12	.33	74LS139	.59	74LS266	.55		
74LS13	.39	74LS145	1.19	74LS273	1.45		
74LS14	.59	74LS148	1.38	74LS275	3.29		
74LS15	.33	74LS151	.55	74LS279	.59		
74LS20	.26	74LS153	.55	74LS283	.68		
74LS21	.29	74LS154	1.49	74LS290	.88		
74LS22	.29	74LS155	.69	74LS293	.78		
74LS26	.29	74LS156	.69	74LS295	.98		
74LS27	.29	74LS157	.69	74LS298	.88		
74LS28	.29	74LS158	.69	74LS324	1.75		
74LS30	.25	74LS160	.69	74LS347	1.95		
74LS32	.33	74LS161	.69	74LS348	1.95		
74LS33	.53	74LS162	.69	74LS352	1.25		
74LS37	.35	74LS163	.69	74LS353	1.25		
74LS38	.39	74LS164	.69	74LS363	1.29		
74LS40	.25	74LS165	.90	74LS365	.48		
74LS42	.44	74LS166	1.90	74LS

Jade's guaranteed quality & our low prices make these new products a real bargain!

NEW PRODUCTS

Jade Satisfaction GUARANTEED Since 1975

20 MEGABYTE Tape Back-up System

- *IBM PC, XT AT compatible*
- *Low-power, half-height tape drive*
- *Uses standard data cassettes*
- *Unique flexible software allows choice of file-by-file or complete mirror-image back-up & retrieval*
- *6 different file selection parameters*
- *Automatic error checking & correction*
- *Includes controller card & software*

	LIST	JADE
20 MB cassette back-up	*$995*	**$695.00**
45 MB 1/4" tape back-up	*$1195*	**$895.00**
External 45 MB system	*$1495*	**$1095.00**

MODEM PHONE 300

- *Speaker phone & 300 baud modem*
- *Auto answer, auto disconnect*
- *20 number x 18 digit memory*

Modem phone 300 ____ *$149* **$99.95**

OMNI-READER TEXT SCANNER

For DATA ENTRY

- *Enters data at 160 cps*
- *Serial interface configured as a modem*
- *300, 600, 1200, 2400, 4800, 9600 baud*

SALE PRICED AT ____ **$479.95**

IBM-AT Multi Function Expansion Board

- *Up to 3 Megabytes of RAM*
- *Uses standard 64K or 256K chips*
- *Has PAL for split addressing*
- *Low power, IBM-AT high speed bus*
- *One parallel & one serial port*
- *Second serial port optional*

	LIST	JADE
128K, 1 serial, 1 parallel	*$495*	**$395.00**
Second serial port option	*$59*	**$49.95**

2400 BAUD MODEM

- *O-300, 1200, 2400 baud*
- *Bell 103, 113, 212A, CCITT V.22, V.22*
- *Auto baud, redial, and answer*
- *8 LED status indicators*
- *Self test & speaker volume control*
- *Looks like a Hayes smartmodem*
- *1200 baud & 1200B modems also avail.*

	LIST	JADE
Jade 1200	*$399*	**$249.95**
JADE 1200B IBM PC	*$299*	**$239.95**
Jade 2400	*$699*	**$449.95**

10 Megabyte Hard Disk for IBM PC $699.00

Plug-n-run, ready to go, complete with controller card, data cable, and mounting hardware, totally PC/XT compatible, faster than XT, handles 4 different operating systems, streamer tape back-up available. External model includes cabinet & power supply.

	LIST	JADE
10 mbyte internal	*$1795*	**$699.95**
10 mbyte external	*$2095*	**$999.95**
15 mbyte internal	*$1995*	**$1299.95**
15 mbyte external	*$2295*	**$1399.95**
22 mbyte internal	*$2495*	**$1699.95**
22 mbyte external	*$2795*	**$1799.95**

KEYTRONICS KEYBOARDS

	LIST	JADE
5150	*$209*	**$159.95**
5151	*$299*	**$199.95**
5152	*$329*	**$229.95**

360K DISK DRIVES for IBM PC

Double sided, double density

Tandon 100-2	**$169.00 each**
Teac 55B	**$129.00 each**
360K Half height drive	**$99.00 each**

AST for IBM PC

	LIST	JADE
Six Pak plus 0K	*N/A*	**$249.95**
Six Pak plus 64K	*$395*	**$269.95**
Six Pak plus 256K	*$695*	**$489.95**
Six Pak plus 384K	*$945*	**$589.95**
Mega plus 64K	*$395*	**$269.95**
Mega plus 256K	*$665*	**$429.95**
Mega plus 512K	*$1095*	**$799.95**
I/O plus	*$165*	**$119.95**
Graphpak	*$790*	**$574.95**

Expansion Boards for your IBM-AT

	LIST	
Quadport-AT *1S, 1P*	*$154*	**$139.95**
4 Serial port kit	*$195*	**$179.95**
Quadmeg-AT *1 MEG*	*$2465*	**$1995.00**
Quadmeg-AT *2 MEG*	*$3995*	**$3195.00**
Quadmeg-A4 *4 MEG*	*$7490*	**CALL**
JADE AT-Expando plus	*$495*	**$395.00**
AT-Memory Master plus	*$495*	**$429.00**
AST Advantage-AT	*$495*	**$449.00**
Bar Code Reader System	*$895*	**$695.00**
128K Upgrade Kit	*$395*	**$169.00**
20 Megabyte Hard disk	*$1790*	**$995.00**

PERSYST BOARDS

	LIST	JADE
Mono display adapter	*$225*	**$189.95**
Mono display adapter w/parallel	*$250*	**$199.95**
BoB Hi-res display adapter	*$595*	**$469.95**
Time Spectrum SB 384 64K	*$395*	**$299.95**

HIGH SPEED 8087 APU

List Price $293 ____ **SALE PRICE $179.95**

HAYES Smartmodem

Sophisticated direct-connect auto-answer/auto dial modem, touch tone or pulse dialing RS232C interface programmable

		LIST	JADE
HAYES	**Smartmodem 2400**	*$895*	**$699.00**
HAYES	**Smartmodem 1200**	*$699*	**$469.95**
HAYES	**1200B w/o Smartcom II**	*$539*	**$359.95**
HAYES	**1200B for IBM PC**	*$599*	**$399.95**
HAYES	**Smartmodem 300**	*$289*	**$199.00**
HAYES	**Hayes Cronograph**	*$249*	**$199.95**
HAYES	**Micromodem 100**	*$399*	**$299.95**
HAYES	**Micromodem IIe**	*$299*	**$239.95**
HAYES	**Smartmodem IIc**	*$399*	**$249.95**
HAYES	**PLEASE Software**	*$395*	**$299.95**
HAYES	**Smartcom II**	*$149*	**$99.95**

Inquiry 185

New! from JADE
IBM Multifunction Card

Up to 384K, parallel printer port, RS-232 serial port, FREE serial cable, clock/calendar, RAM disk/spooler and diagnostic software package

	LIST	JADE
0K	*$349*	**$198.95**
64K	*$449*	**$243.90**
256K	*$549*	**$372.90**
384K	*$649*	**$458.90**

64K RAM Upgrade Kits for your IBM PC **$29.95**

High speed RAM upgrade kit with FREE! parity (error detection) and one year warranty.

	LIST	JADE
128K RAM Kit for AT	*$359*	**$169.95**
256K RAM Upgrade Kit	*$495*	**$179.95**

The Best from EVEREX

	JADE
Graphics Edge *$499*	**$389.95**
Graphics Pacer *$489*	**$379.95**
Ever Graphics *$289*	**$249.95**
Evercom Modem *$359*	**$299.95**
Magic card 0K *$275*	**$199.95**
Magic card 384K *$799*	**$399.95**

QUADRAM for IBM PC

	LIST	JADE
Quadboard *No RAM*	*$269*	**$234.95**
Quadboard 64K	*$395*	**$275.95**
Quadboard 128K	*$495*	**$339.95**
Quadboard 256K	*$595*	**$399.95**
Quadboard 384K	*$795*	**$595.95**
Quadlink	*$680*	**$449.95**
Quad 512 plus 64K	*$325*	**$239.95**
Quad 512 plus 256K	*$550*	**$389.95**
Quad 512 plus 512K	*$895*	**$549.95**
Quadcolor I	*$295*	**$209.95**
Quadcolor II	*$275*	**$199.95**
Quad 2 MEG w/512K	*$1195*	**$995.00**
Quad 2 MEG w/1 mbyte	*$1995*	**$1695.00**
Quad 2 MEG w/2 mbyte	*$3495*	**$2995.00**
Pallette Master 256 colors	*$695*	**$599.00**
Quadgraph Graphics Card	*$499*	**$399.00**
Quadvue IS, IP, C, monochrome	*$345*	**$299.00**
Quad sprint doubler	*$645*	**$549.00**
576K Max PAQ w/64K	*$205*	**$189.00**
516K Max PAQ w/384K	*$595*	**$349.00**
Asher Voice & Data	*$695*	**$599.00**

MICROSOFT for IBM PC

	LIST	JADE
Mouse with Word	*$495*	**$339.95**
Mouse	*$199*	**$129.95**

IBM® PC **$1595.**

256K, dual disk drives, and disk controller.

OPTION #1

256K,
two disk drives,
Monochrome card,
monitor, and printer port

$1895.

OPTION #2

256K,
two disk drives,
disk controller,
PGS color monitor,
color graphics card,
parallel port,

$2395.

OPTION #3

256K expandable to 640K,
10 megabyte hard disk,
parallel port,
serial port,
clock/calendar,
RAM disk/spooler,
color card
Amdek 300G monitor

$2995.

Call us Toll Free!
& our experts will custom build an IBM PC to satisfy your exact needs.

IBM VIDEO BOARDS

	LIST	JADE
Hercules Color	*$245*	**$189.95**
Hercules Graphic	*$499*	**$339.95**
Plantronics Color plus	*$549*	**$379.95**
Quadcolor I	*$295*	**$209.95**
Quadcolor II	*$275*	**$209.95**
AST Monograph plus	*$595*	**$449.95**
PC Peacock	*$299*	**$239.95**
PC 384K Genie 0K	*$395*	**$249.95**
Paradise Graphics card	*$395*	**$319.95**
Paradise Module A	*$95*	**$87.95**
Paradise Module B	*$275*	**$239.95**
Everex Graphics Edge	*$599*	**$389.95**

Hi-Res MONITORS

	LIST	
Amdek 300G	*$179*	**$139.95**
Amdek 300A	*$199*	**$149.95**
Amdek 310A	*$230*	**$179.95**
Amdek Color 300	*$349*	**$249.95**
Amdek Color 500	*$525*	**$399.95**
Amdek Color 600	*$650*	**$469.95**
Amdek Color 700	*$799*	**$589.95**
PGS MAX-12	*$269*	**$199.95**
PGS HX-12 640x240	*$699*	**$469.95**
PGS SR-12 720x480	*$799*	**$649.95**
PGS Doubler board	*$299*	**$229.95**
14 inch Quadchrome II	*$599*	**$499.95**
Comrex CR6800 750x400	*$649*	**$499.95**
Gorilla Green	*$99*	**$89.95**
Gorilla Amber	*$119*	**$99.95**
JADE Hi-res Amber	*$199*	**$139.95**
JADE Hi-res Green	*$199*	**$129.95**
JADE Color RGB 640x240	*$699*	**$349.95**
JADE Color RGB 720x480	*$799*	**$469.95**

SHUGART SA 801R $159.

SHUGART SA 801R SS/DD *(limited supply)*
List $502 **$159.00 ea** 2 for **$149.00 ea.**

SHUGART SA-851R DS/DD
List $605 **$459.00 ea** 2 for **$455.00 ea**

ULTRA-VIOLET EPROM ERASERS

	LIST	JADE
Spectronics w/o timer	*$99*	**$69.95**
Spectronics with timer	*$139*	**$94.95**
Logical Devices	*$89*	**$49.95**

PRO MODEMS from Prometheus

	LIST	JADE
1200B for IBM PC	*$399*	**$299.95**
1200 RS-232	*$495*	**$389.95**
1200A for Apple	*$449*	**$329.95**
1200 Mac Pac for Macintosh	*$495*	**$389.95**

ISOBAR

The ISOBAR looks like a standard multioutlet power strip but contains surge suppression circuitry and built-in noise filters, plus 15 amp circuit breaker.

	LIST	JADE
4 receptacle	*$89*	**$59.95**
8 receptacle	*$99*	**$69.95**

UNINTERRUPTABLE POWER SUPPLY
A must for every computer system

425 Watt UPS	*$539*	**$469.95**

APPLE

APPLE ACESSORIES

	LIST	JADE
Full Height Disk Drive	*$299*	**$149.95**
Half Height Disk Drive	*$249*	**$149.95**
Controller	*$100*	**$79.95**
CP/M 3.0 Card	*$399*	**$269.95**
ALS Z Engine	*$299*	**$145.95**
16K RAM Card	*$99*	**$39.95**
Best 80 Column Card	*$219*	**$139.95**
Printer Card & Cable	*$109*	**$49.95**
Fan w/surge protect	*$99*	**$59.95**
Koala Pad	*$125*	**$89.95**
Grappler Plus	*$175*	**$119.95**
Buffered Grappler/16K	*$245*	**$175.95**
Disk Drive for Apple IIc	*$299*	**$159.95**
10 Meg Hard Disk	*$1495*	**$895.00**

Place Orders Toll Free!

Continental U.S.A.
(800) 421-5500

Inside California
(800) 262-1710

Los Angeles Area
(213) 973-7707

JADE
Computer Products

4901 West Rosecrans Ave. Hawthorne, California 90250

Continental U.S.
800-421-5500

Inside California
800-262-1710

For Technical Inquires or Customer Service call:
213-973-7707

Jade Satisfaction GUARANTEED Since 1975

Printers

OKIDATA Prices Slashed *FREE IBM ROMS

160 CPS, Correspondence Quality	LIST	JADE
Okidata 92 parallel	*$599*	**$389.95***
Okidata 93 parallel FREE tractor!	*$995*	**$599.95***
2K serial board	*$120*	**$99.95**
IBM PC ROMS for 92	*$59*	**$49.95**
IBM PC ROMS for 93	*$69*	**$59.95**
Extra 82/93 Ribbon	*$9.95*	**$4.95**
82/92 tractor	*$89*	**$54.95**

120 CPS & 200 CPS OKIDATAS	LIST	JADE
Okidata 82 120 CPS	*$499*	**$299.95**
Okidata 83 120 CPS	*$775*	**$569.95***
Okidata 84 parallel 200 CPS	*$1395*	**$799.95***
Okidata 84 serial 200 CPS	*$1495*	**$949.95**
2K serial board	*$150*	**$119.95**
IBM PC ROMS for 82/83	*$49*	**$39.95**
IBM PC ROMS for 84	*$99*	**$89.95**

***FREE! Plug-n-Play option with purchase of 92, 93, or 84**

A-B PRINTER SWITCH

Allows your computer to run either of two printers, standard parallel switch box.

	LIST	JADE
Printer switch	*$149*	**$89.95**
Extra Cable	*$40*	**$29.95**

The LITTLE BOARD with FREE! CP/M 2.2

Minature single board CP/M computer designed to mount directly on top of a 5¼" floppy disk drive (7.75" x 5.75"). Contains Z80A, CPU, 64K RAM, Boot Eprom, terminal port, modem port, parallel printer port, floppy disk controller, and CP/M 2.2 included FREE!

	LIST	JADE
Little Board with CP/M	*$400*	**$349.95**
Support package	*$50*	**$48.95**
Serial cable	*$13*	**$11.95**
Diskless monitor Eprom	*$30*	**$24.95**
190K Disk drive	*$249*	**$99.95**
350K Disk drive	*$399*	**$149.95**

EPSON PRINTERS New Plus Series in Stock!

EPSON RX-80	SAVE	**$80.00**
EPSON RX-80F/T	SAVE	**$100.00**
EPSON RX-100F/T	SAVE	**$250.00**
EPSON JX-80F/T	SAVE	**$200.00**
EPSON FX-80F/T	SAVE	**$200.00**
EPSON FX-100F/T	SAVE	**$300.00**
EPSON LQ-1500	SAVE	**$300.00**
EPSON/COMREX 420 CPS	SAVE	**$500.00**
2K Serial Board RX/FX	*$149*	**$99.95**
FX-80 Tractor	*$59*	**$39.95**
LQ-1500 Tractor	*$89*	**$49.95**
LQ-1500 Sheet Feeder	*$499*	**$399.95**

SUPER DISKETTE SPECIAL Perfect for IBM, Apple, Kaypro, etc.

Ultra-high quality diskettes from a premuim U.S. manufacturer, certified to be absolutely error free for one full year. Buy a box of ten this month and we will include a plastic storage/library box FREE!

Single-sided, double-density	*$34*	**$16.50**
Double-sided, double-density	*$42*	**$19.50**
Bulk Diskettes as low as		*$1.10*

LETTER QUALITY PRINTERS ON SALE!

	LIST	JADE
Diablo 630 40 CPS	*$2340*	**$1699.95**
Tractor for 630	*$250*	**$219.95**
Starwriter F-10 40 CPS	*$1895*	**$999.95**
Starwriter F-10 55 CPS	*$1995*	**$1299.95**
Tractor for F-10	*$250*	**$219.95**
Comrex CR-II	*$599*	**$399.95**
Tractor for CR-II	*$120*	**$99.95**
Keyboard for CR-II	*$199*	**$179.95**
Sheet feeder for CR-II	*$259*	**$199.95**
Juki 6100 18 CPS	*$599*	**$449.95**
Tractor for 6100	*$149*	**$124.95**
NEC 3550 33 CPS	*$2250*	**$1399.95**
Tractor for 3550	*$265*	**$229.95**

TOSHIBA P1351 High speed & letter quality!

High quality 24 pin head, 192 CPS draft mode, 96 CPS letter quality.

	LIST	JADE
P1351	*$1895*	**$1299.95**
Tractor	*$195*	**$174.95**
Sheet Feeder	*$1095*	**$899.95**

MANNESMAN-TALLY Spirit 80 Printer

List Price $399

$249.95

Hurry Limited Quantity!

PRINTER ACCESSORIES

	JADE
IBM PC style cable	**$28.95**
Standard parallel cable	**$28.95**
Apple Card & cable	**$49.95**
RS-232 serial cable	**$24.95**
Ribbons	**AS LOW AS $4.99**
Apple IIc cable	**$27.95**

MICROFAZER BUFFERS Quadram

Expandable to 64K (parallel model expands to 512K)

8K *parallel in/parallel out*	*$169*	**$139.95**
32K *parallel in/parallel out*	*$225*	**$164.95**
128K *parallel in/parallel out*	*$445*	**$269.95**
8K *serial in/parallel out*	*$199*	**$169.95**
32K *serial in/parallel out*	*$260*	**$199.95**
8K *parallel in/serial out*	*$199*	**$169.95**
32K *parallel in/serial out*	*$260*	**$199.95**
8K *serial in/serial out*	*$199*	**$169.95**
32K *serial in/serial out*	*$260*	**$199.95**

MICROBUFFER Practical Peripherals

Stand alone Microbuffers	LIST	JADE
32K *parallel in/parallel out*	*$299*	**$229.95**
64K *parallel in/parallel out*	*$349*	**$269.95**
32K *serial in/serial out*	*$299*	**$229.95**
64K *serial in/serial out*	*$349*	**$269.95**
64K add-on board	*$179*	**$149.95**

We accept cash, checks, credit cards, or purchase orders from qualified firms and institutions. **Minimum prepaid order $15.00** California residents add 6½% tax. Export customers outside the US or Canada please add 10% to all prices. **Prices and availibility subject to change without notice.** Shipping and handling charges via UPS Ground 50¢/lb. UPS Air $1.00/lb. **minimum charge $3.00**

JADE
Computer Products

LOW COST UNIVERSAL E(E)PROM PROGRAMMER



* SUPPORTS: (EPROMS) 2516 THRU 64, 2716 THRU 512, 27C16 THRU 128, 68732 THRU 66 (EEPROMS) 52B13 THRU 33, 2816A THRU 64A (MICROS) 8741 THRU 49H
* NO PERSONALITY MODULES, ONBOARD POWER SUPPLY
* RS232C INTERFACE, XON-XOFF, RTS, CTS, DTR
* ACCEPTS KEYBOARD ENTRY WITH LINE EDITING
* ACCEPTS ASCII, INTEL, AND MOTOROLA FORMATS
* USER FRIENDLY MONITOR FOR I/O DEBUGGING
* FAST PROGRAMMING SUPPORTED: 2764 UNDER 3 MIN.
* LOW/HIGH BYTE PROGRAMMING FOR 16 BIT DATA PATH
* BYTE, BLOCK, OR CHIP ERASE (EEPROMS ONLY)
* LIST IN INTEL OR MOTOROLA HEX FORMAT
* VERIFY PROGRAM AND VERIFY BLANK COMMANDS

* 1409-01: 4K FIRMWARE, PCB, XFORMER, DOC	$90.00
* 1409-02: 1409-01 + FULL SET OF PARTS	$200.00
* 1409-03: ASSEMBLED AND TESTED UNIT	$300.00
* 1409-11: 8K FIRMWARE, PCB, XFORMER, DOC	$125.00
* 1409-12: 1409-11 + FULL SET OF PARTS	$250.00
* 1409-13: ASSEMBLED AND TESTED UNIT	$350.00
* COMMUNICATION DRIVERS FOR MOST PC'S	$35.00

B&C MICROSYSTEMS
6322 MOJAVE DR, SAN JOSE, CA 95120
Tel.(408)997-7685, TWX 4995363

Inquiry 137

FoxBASE II™
Interpreter / Compiler

- **dBASE II® source compatible**
- Runs 3-20 times faster than dBASE II
- Up to 48 fields per record
- Full type-ahead capabilities
- Provides compact object code and program security
- Twice as many memory variables as dBASE II
- Sophisticated online manual and HELP facility

MS-DOS **$395** AOS/VS **$995**

dBASE II is a registered trademark of Ashton-Tate

FOX SOFTWARE INC.
13330 Bishop Road, P.O. Box 269
Bowling Green, OH 43402 / 419-354-3981

INSIGHT™

Advises, Forecasts, Simulates, Tutors, Decides, Evaluates, Solves, Reports.

Lets you Design, create and run problem solving expert systems on the **IBM-PC** or **DEC Rainbow.** No programming, uses English language knowledge base.

$95.

Level 5 Research

4980 S-A1A, Melbourne Bch. FL 32951
305/729-9046
CREDIT CARD ORDERS ACCEPTED

Inquiry 201

TELEVIDEO TPC-1 PORTABLE COMPUTER



LIST PRICE ~~$1,995.00~~
OUR PRICE $995.00
50% SAVINGS WHILE THEY LAST

FEATURES:
- 64K Ram
- Dual 5¼" Floppy Disk Drive (368.6K per drive)
- 9" Amber Graphic Monitor
- Low Profile Keyboard w/10 function keys
- TeleWrite, TeleCalc, TeleChart CP/M

EXSEL INC.
OFFICE EQUIPMENT BROKERS
215 ALEXANDER STREET
ROCHESTER, NEW YORK 14607
TELEX: 131116

(716) 325-5530

VISA master charge

Inquiry 132

Serial ◀▮▮▮▮▮▮▮▮▶ Parallel



Convert What You Have To What You Want!

- RS232 Serial
- 8 Baud Rates
- Latched Outputs
- Centronics Parallel
- Handshake Signals
- Compact 3¾ × 4⅝ × 1½

No longer will your peripheral choices be limited by the type of port you have available! Our new High Performance 700 Series Converters provide the missing link. Based on the latest in CMOS technology, these units feature full baud rate selection to 19.2K, with handshake signals to maximize transfer efficiency. Detailed documentation allows simplified installation. Order the Model 770 (Ser/Par) or Model 775 (Par/Ser) Today!

Buffer Products Coming Soon!

Tigertronics INCORPORATED
2734-C Johnson Dr.
Post Office Box 3717
Ventura, California 93006

only $89.95
Connector Option $10.00
CA Residents 6% tax
UPS Shipping $3.00

CALL (805) 658-7466 or 658-7467
For FAST Delivery

Inquiry 127

INTRODUCING
THE CYPHER™
A COMPLETE 68000 & Z 80 SINGLE BOARD COMPUTER SYSTEM WITH ULTRA-HIGH-RES GRAPHICS!!



- 68000 & Z80 DUAL PROCESSORS (BEST OF BOTH WORLDS!)
- 256K TO 1 MEGABYTE MEMORY
- DOUBLE DENSITY FLOPPY DISK CONTROLLER (8" OR 5¼", WD 2793)
- DMA CONTROLLER FOR FAST IMAGE TRANSFERS TO/FROM VIDEO MEMORY. (INT 8237)
- 2 RS232 SERIAL PORTS (Z80)
- 24 BIT ADDRESS MANAGEMENT FOR Z80.
- 4 LAYER P.C.B. (9¼ X 14¾")
- RUNS CP/M-80 AND CP/M-68K
- ULTRA HIGH RESOLUTION GRAPHICS, 128K PROGRAMMABLE UP TO 1024 X 1024 RESOLUTION (NEC 7220, GREAT FOR CAD SYSTEMS!)
- REAL TIME CLOCK (MULTITASKING CAPABILITY)
- TWO CHANNELS OF D/A AND A/D, 12 BIT RESOLUTION (MUSIC, ROBOTICS!)
- 16K TO 64K MONITOR EPROM
- 4K TO 64K STATIC RAM.
- PROGRAMMABLE BAUD RATE GENERATOR.
- PARALLEL ASCII KEYBOARD INPUT.
- FULL 68000 EXPANSION BUS (60 PIN HEADER, BUFFERED)

(80286 CPU AND HARD DISC INTERFACE PLUG-IN CARD AVAILABLE SOON!)

MANUAL	$ 30.00
BARE BOARD, EPROMS, Z80 BIOS, 68000 BIOS, Z80 MONITOR, 68000 MONITOR AND UTILITIES	$ 399.95
BASIC ASSEMBLED, SYSTEM TESTED WITH 68000/Z80, SERIAL I/O, 128K DRAM, 4K S RAM AND DISK CONTROLLER	$1,099.95
COMPLETELY ASSEMBLED "CYPHER" WITH 256K DRAM, 128K VIDEO DRAM, NEC 7220, REAL TIME CLOCK, A/D, D/A, DISC CONTROLLER, SERIAL I/O	$1,499.95
KEYBOARD	$ 94.95
SWITCHING POWER SUPPLY	$ 154.95
CASE	$ 94.95

MOTOROLA INTEL

ALL PRICES ARE IN U.S. DOLLARS
SHIPPING: 6% SHIPPING, EXCESS WILL BE REFUNDED
DELIVERY: WILL BE MADE APPROXIMATELY 3 TO 5 WEEKS AFTER WE RECEIVE YOUR ORDER. VISA, MC, CASH.
PRICES SUBJECT TO CHANGE WITHOUT NOTICE
CP/M IS A TRADEMARK OF DIGITAL RESEARCH

MOTEL COMPUTERS LIMITED
174 BETTY ANN DRIVE, WILLOWDALE, TORONTO, ONTARIO, CANADA M2N 1X6
(416) 221-2340

Inquiry 245

PAL, EPROM PROGRAMMERS & UV ERASERS FROM $49.95

LOGICAL DEVICES INC.

Where Reliability and Customer Support is of utmost Importance

SEE OUR AD ON PAGE 32

LOGICAL

ORDER TOLL FREE
1-800-EEI-PROM
(1-800-331-7766)

Inquiry 207

maxell DISKS
LIFETIME WARRANTY

Think you're getting the best price on Maxell Diskettes?
You're right . . . BUT ONLY IF . . .
You're buying from
NORTH HILLS CORP.

We will beat any nationally advertised price* or give you a 15 disk library case **FREE!**

Call us last—TOLL FREE—for our best shot every time.

1-800-328-3472

Formatted and hard sectored disks in stock.

Dealer inquiries invited. COD's and charge cards accepted. All orders shipped from stock within 24 hours. Why wait 10 days to be shipped?

North Hills Corporation
3564 Rolling View Dr.
White Bear Lake, MN 55110
MN Call Collect 1-612-770-0485

*verifiable; same product, same quantities

Inquiry 261

MARYMAC INDUSTRIES INC.

800-231-3680

Radio Shack TRS-80's
Epson Printers

People you Trust to give you the very best!



- Lowest Price
- Reliable Service
- Quality Products

22511 Katy Fwy., Katy (Houston) Texas 77450
(713) 392-0747 Telex 774132

Inquiry 218

DoKay COMPUTER PRODUCTS, Inc.

ORDER TOLL FREE

(800) 538-8800

(CALIFORNIA RESIDENTS)

(800) 848-8008

VISA MasterCard

STATIC RAMS

2101	256 x 4 (450ns)	1.90
5101	256 x 4 (450ns) (cmos)	3.90
2102-1	1024 x 1 (450ns)	.88
2102L-4	1024 x 1 (450ns) (LP)	.98
2102L-2	1024 x 1 (250ns) (LP)	1.45
2111	256 x 4 (450ns)	2.45
2112	256 x 4 (450ns)	2.95
2114	1024 x 4 (450ns)	.99
2114-25	1024 x 4 (250ns)	1.10
2114L-4	1024 x 4 (450ns) (LP)	1.20
2114L-3	1024 x 4 (300ns) (LP)	1.30
2114L-2	1024 x 4 (200ns) (LP)	1.40
2125	1024 x 1	2.49
2147	4096 x 1 (55ns)	4.90
TMS4044-4	4096 x 1 (450ns)	3.45
TMS4044-3	4096 x 1 (300ns)	3.95
TMS4044-2	4096 x 1 (200ns)	4.45
MK4118	1024 x 8 (250ns)	9.90
TMM2016-200	2048 x 8 (200ns)	4.10
TMM2016-150	2048 x 8 (150ns)	4.90
TMM2016-100	2048 x 8 (100ns)	6.10
HM6116-4	2048 x 8 (200ns) (cmos)	4.70
HM6116-3	2048 x 8 (150ns) (cmos)	4.90
HM6116-2	2048 x 8 (120ns) (cmos)	8.90
HM6116LP-4	2048 x 8 (200ns) (cmos)	5.90
HM6116LP-3	2048 x 8 (150ns) (cmos)(LP)	6.90
HM6116LP-2	2048 x 8 (120ns) (cmos)(LP)	9.95
Z-6132	4096 x 8 (300ns) (Qstat)	33.95
HM6264P-15	8192 x 8 (150ns) (cmos)	32.95
HM6264LP-15	8192 x 8 (150ns) (cmos)	36.95
HM6264LP-12	8192 x 8 (120ns) (cmos)	46.95

LP = Low Power Qstat = Quasi-Static

DYNAMIC RAMS

TMS4027	4096 x 1 (250ns)	1.95
UPD411	4096 x 1 (300ns)	1.95
MM5280	4096 x 1 (300ns)	1.95
MK4108	8192 x 1 (200ns)	1.90
MM5298	8192 x 1 (250ns)	1.80
4116-200	16384 x 1 (200ns)	.79
4116-150	16384 x 1 (150ns)	1.20
2118	16384 x 1 (150ns) (5v)	4.90
4164-250	65536 x 1 (250ns)	2.99
4164-200	65536 x 1 (200ns) (5v)	3.33
4164-150	65536 x 1 (150ns) (5v)	3.99
41256	(200ns)	29.95
41256	(150ns)	39.95

5V = Single 5 Volt Supply

EPROMS

1702	256 x 8 (1us)	4.45
2708	1024 x 8 (450ns)	2.49
2758	1024 x 8 (450ns) (5v)	5.90
2716	2048 x 8 (450ns) (5v)	2.95
2716-1	2048 x 8 (350ns) (5v)	5.90
TMS2516	2048 x 8 (450ns) (5v)	5.45
TMS2716	2048 x 8 (450ns)	6.95
TMS2532	4096 x 8 (450ns) (5v)	5.90
2732	4096 x 8 (450ns) (5v)	4.45
2732-250	4096 x 8 (250ns) (5v)	8.90
2732-200	4096 x 8 (200ns) (5V)	10.95
2764	8192 x 8 (450ns) (5v)	6.45
2764-250	8192 x 8 (250ns) (5v)	7.45
2764-200	8192 x 1 (200ns) (5v)	16.45
TMS2564	8192 x 8 (450ns) (5v)	12.95
2732A	(350ns)	4.45
MC68766	8192 x 8 (450ns) (5v) (24 pin)	29.95
27128	16384 x 8 (250ns) (5v)	24.95

5v = Single 5 Volt Supply

74LS00

74LS00	.23	74LS125	.48	74LS260	.58
74LS01	.24	74LS126	.48	74LS266	.54
74LS02	.24	74LS132	.58	74LS273	1.45
74LS03	.24	74LS133	.58	74LS275	3.30
74LS04	.23	74LS136	.38	74LS279	.48
74LS05	.24	74LS137	.98	74LS280	1.95
74LS08	.27	74LS138	.54	74LS283	.68
74LS09	.28	74LS139	.54	74LS290	.88
74LS10	.24	74LS145	1.15	74LS293	.88
74LS11	.34	74LS147	2.45	74LS295	.98
74LS12	.34	74LS148	1.30	74LS298	.88
74LS13	.44	74LS151	.54	74LS299	1.70
74LS14	.58	74LS153	.54	74LS323	3.45
74LS15	.34	74LS154	1.85	74LS324	1.70
74LS20	.24	74LS155	.68	74LS352	1.25
74LS21	.28	74LS156	.68	74LS353	1.25
74LS22	.24	74LS157	.64	74LS363	1.30
74LS26	.28	74LS158	.58	74LS364	1.90
74LS27	.28	74LS160	.68	74LS365	.48
74LS28	.34	74LS161	.64	74LS366	.48
74LS30	.24	74LS162	.68	74LS367	.44
74LS32	.28	74LS163	.64	74LS368	.44
74LS33	.54	74LS164	.68	74LS373	1.35
74LS37	.34	74LS165	.94	74LS374	1.35
74LS38	.34	74LS166	1.90	74LS377	1.35
74LS40	.24	74LS168	1.70	74LS378	1.13
74LS42	.48	74LS169	1.70	74LS378	1.30
74LS47	.74	74LS170	1.45	74LS385	1.85
74LS48	.74	74LS173	.68	74LS386	.44
74LS49	.74	74LS174	.54	74LS390	1.15
74LS51	.24	74LS175	.54	74LS393	1.15
74LS54	.28	74LS181	2.10	74LS395	1.15
74LS55	.28	74LS189	8.90	74LS399	1.45
74LS63	1.20	74LS190	.88	74LS424	2.90
74LS73	.38	74LS191	.88	74LS447	.36
74LS74	.34	74LS192	.78	74LS490	1.90
74LS75	.38	74LS193	.78	74LS624	3.95
74LS76	.38	74LS194	.68	74LS640	2.15
74LS78	.48	74LS195	.68	74LS645	2.15
74LS83	.59	74LS196	.78	74LS668	1.65
74LS85	.68	74LS197	.78	74LS669	1.85
74LS86	.38	74LS221	.88	74LS670	1.45
74LS90	.54	74LS240	.94	74LS674	9.50
74LS91	.88	74LS241	.98	74LS682	3.15
74LS92	.54	74LS242	.98	74LS683	3.15
74LS93	.54	74LS243	.98	74LS684	3.15
74LS95	.74	74LS244	1.25	74LS685	3.15
74LS96	.88	74LS245	1.45	74LS688	2.35
74LS107	.38	74LS247	.74	74LS689	3.15
74LS109	.38	74LS248	.98	74LS783	23.95
74LS112	.38	74LS249	.98	81LS95	1.45
74LS113	.38	74LS251	.58	81LS96	1.45
74LS114	.38	74LS253	.58	81LS97	1.45
74LS122	.44	74LS257	.58	81LS98	1.45
74LS123	.78	74LS258	.58	25LS2521	2.75
74LS124	2.85	74LS259	2.70	25LS2569	4.20

CRT CONTROLLERS

6845	11.95
7220	38.95
CRT 5027	18.95
CRT 5037	28.95
TMS 9918A	36.95
HD 46505sp	11.95

DISC CONTROLLERS

1771	14.95	2797	54.95
1791	21.95	6843	33.95
1793	25.95	8272	18.95
1795	21.95	UPD765	18.95
1797	21.95	M88876	23.95
2791	49.95	M88877	25.95
2793	49.95	1691	6.95
2795	54.95	2143	6.95

1984
– THE IC MASTER –

Your ticket to fast and easy IC selections



$ 89.95

6500

1 MHZ		2 MHZ	
6502	4.90	6502A	6.90
6504	6.90	6522A	9.90
6505	8.90	6532A	10.95
6507	9.90	6545A	26.95
6520	4.30	6551A	10.95
6522	6.90	**3 MHZ**	
6532	9.90	6502B	8.95
6545	21.50		
6551	10.85		

6800

68000	45.95	6860	6.95
6800	2.75	6862	10.95
6802	7.90	6875	6.90
6808	12.90	6880	2.20
6809E	13.95	6883	21.95
6809	10.95	68047	23.95
6810	2.90	68488	18.95
6820	4.30		
6821	2.75	**1 MHZ**	
6828	13.95	68B00	9.95
6840	11.95	68B02	21.25
6843	33.95	68B09E	28.95
6844	24.95	68B09	28.95
6845	11.95	68B10	6.90
6847	10.95	68B21	6.90
6850	3.20	68B45	18.95
6852	4.95	68B50	5.90

MICROPROCESSORS

8000

8031	5.75	8088	25.95
8035	5.90	8089	59.95
8039	5.75	8155	6.90
INS-8060	16.95	8155-2	7.90
INS-8073	45.95	8156	6.90
8080	3.90	8185	28.95
8085	4.75	8185-2	38.95
8085A-2	10.95	8741	19.95
8086	23.95	8748	35.95
8087	159.95	8755	23.95

8200

8202	23.95	8255-5	5.20
8203	38.95	8257	7.90
8205	3.45	8257-5	8.90
8212	1.75	8259	6.85
8214	3.80	8259-5	7.45
8216	1.70	8271	75.00
8224	2.20	8272	38.95
8226	1.75	8274	29.95
8228	3.45	8275	28.95
8237	18.95	8279	8.90
8237-5	20.95	8279-5	9.00
8238	4.45	8282	6.45
8243	3.95	8283	6.45
8250	9.95	8284	4.95
8251	4.45	8286	6.45
8253	6.90	8287	6.45
8253-5	7.90	8288	24.00
8255	4.45	8289	13.95
		8292	16.95

Z-80

2.5 MHZ		4.0 MHZ	
Z80-CPU	2.95	Z80A-CPU	3.95
Z80-CTC	2.95	Z80A-CTC	3.95
Z80-DART	8.95	Z80A-DART	8.95
Z80-DMA	11.95	Z80A-DMA	8.95
Z80-PIO	2.95	Z80A-PIO	3.95
Z80-SIO/0	10.95	Z80A-SIO/0	11.95
Z80-SIO/1	10.95	Z80A-SIO/1	11.95
Z80-SIO/2	10.95	Z80A-SIO/2	11.95
Z80-SIO/9	10.95	Z80A-SIO/9	11.95
6.0 MHZ		**ZILOG**	
Z80B-CPU	8.95	Z6132	33.95
Z80B-CTC	8.95	Z8671	38.95
Z80B-PIO	8.95		
Z80B-DART	12.95		

MEMORY EXPANSION KIT



4164 200ns
9 for $29.97

Low Cost EPROM – PROGRAMMER –



The "Shooter" $395.00

- 32K bits upgradable to 128K memory
- Built-in Serial RS-232 Port
- Program & verify 2716 thru 27256
- Intelligent, fast programming
- Up/download Hex, Binary, ASCII etc.
- Serial RS-232 interface compatible

UV ERASERS

QUV-T8/1 $49.95
ECONOMY Model



- Erases 8 EPROMS in 20 minutes
- Plastic Enclosure

QUV-T8/2T $97.50
INDUSTRIAL Model
- Tray Action, • UV Indicator
- 60-minute adjustable timer
- Steel enclosure • Safety switch
- Erase 15 EPROMS in 20 minutes

QUV-T8/2N $68.95
(No Timer)

LUV-1 $149.95
PRODUCTION Model

QUV-T8/2 $124.95
FAST Industrial Model

ST-8 $195.00
8-Tray Storage Cabinet

GANG PROGRAMMER

GANGPRO-8™ $995.00



- High through-put
- Reliable, user-friendly
- Intelligent algorithm
- Program and verify 2716 thru 27256
- Stand alone (RS-232 option $185)

OTHER PRODUCTS:

PROMPRO-8 $689.00
64K Version
- Powerful EPROM/Micro development programmer
- Keypad simulation
- 256K memory buffer option available

PROMPRO-7 $489.00
- 32K non-expandable unit
- Built-in 8748, 8749 programming

PALPRO-2 $1895.00
Stand-alone RS-232 Unit
- Programs 20 and 24 series PALs

PALPRO-1 $995.00
Programs 20-pin PALs

LOGICAL DEVICES, INC. LOGICAL

Inquiry 116

DIP SWITCHES



4 POSITION	.79
5 POSITION	.85
6 POSITION	.85
7 POSITION	.89
8 POSITION	.89

RIBBON CABLE



CONTACTS	SINGLE COLOR 1'	SINGLE COLOR 10'	COLOR CODED 1'	COLOR CODED 10''
10	.45	4.30	.78	7.20
16	.50	4.70	.95	8.70
20	.60	5.60	1.15	10.90
25	.70	6.50	1.22	11.50
26	.70	6.50	1.27	11.50
34	.93	8.50	1.55	14.40
40	1.27	11.50	1.82	16.70
50	1.28	12.00	2.40	21.90

IC SOCKETS
(1 to 99)

8 pin ST.	.12	8 pin WW.	.58
14 pin ST.	.14	14 pin WW.	.68
16 pin ST.	.16	16 pin WW.	.68
18 pin ST.	.19	18 pin WW.	.98
20 pin ST.	.28	20 pin WW.	1.04
22 pin ST.	.29	22 pin WW.	1.34
24 pin ST.	.29	24 pin Ww.	1.44
28 pin ST.	.39	28 pin WW.	1.64
40 pin ST.	.48	40 pin WW.	1.94

ST = Soldertail WW = Wirewrap

ZIF SOCKETS



14 pin ZIF	5.45
16 pin ZIF	5.45
24 pin ZIF	7.45
28 pin ZIF	8.45
40 pin ZIF	10.45

ZIF = TEXTOOL (Zero Insertion Force)

VOLTAGE REGULATORS

7805T	.74	7905T	.84
78M05C	.34	7908T	.84
7808T	.74	7912T	.84
7812T	.74	7915T	.84
7815T	.74	7924T	.84
7824T	.74	7905K	1.44
7805K	1.34	7912K	1.44
7812K	1.34	7915K	1.44
7815K	1.34	7924K	1.44
7824K	1.34	79L05	.78
78L05	.68	79L12	.78
78L12	.68	79L15	.78
78L15	.68	LM323K	4.90
78H05K	9.90	UA78S40	1.90
78H12K	9.90		

C,T = TO-220 K = TO-3
L = TO-92

CRYSTALS

1.0000 MHz	3.69	8.0000 MHz	2.69
1.8432 MHz	3.69	10.0000 MHz	2.69
2.0000 MHz	2.69	10.7386 MHz	2.69
2.0972 MHz	2.69	12.0000 MHz	2.69
2.4576 MHz	2.69	14.3182 MHz	2.69
3.2768 MHz	2.69	15.0000 MHz	2.69
3.5795 MHz	2.69	16.0000 MHz	2.69
4.0000 MHz	2.69	17.4300 MHz	2.69
4.1943 MHz	2.69	18.0000 MHz	2.69
4.9160 MHz	2.69	18.4320 MHz	2.69
5.0000 MHz	2.69	19.6608 MHz	2.69
5.0688 MHz	2.69	20.0000 MHz	2.69
5.1850 MHz	2.69	22.1184 MHz	2.69
5.2429 MHz	2.69	32.0000 MHz	2.69
5.7143 MHz	2.69	36.0000 MHz	2.69
6.0000 MHz	2.69	48.0000 MHz	2.69
6.1440 MHz	2.69	49.4350 MHz	2.69
6.4000 MHz	2.69	49.8900 MHz	2.69
6.5536 MHz	2.69		

32.768 KHz. 1.69

CRYSTAL CLOCK OSCILLATORS

PART NO.	FREQUENCY	PRICE
1.000	1.0000 MHz	6.99
1.843	1.8432 MHz	6.99
2.000	2.0000 MHz	6.99
4.000	4.0000 MHz	6.99
8.000	8.0000 MHz	6.99
10.000	10.0000 MHz	6.99
16.000	16.0000 MHz	6.99
18.432	18.4320 MHz	6.99
19.660	19.6608 MHz	6.99
20.000	20.0000 MHz	6.99
32.000	32.0000 MHz	6.99

EDGECARD CONECTORS

S-100 ST	3.85	50-pin ST	4.85
S-100 WW	4.85	44-pin ST	2.85
72-pin ST	6.85		
72-pin WW	7.85	44-pin WW	4.85

RESISTORS

¼ WATT 5% CARBON FILM
ALL STANDARD VALUES
FROM 1 OHM – 10 MEG OHM

50 PCS	1.25
100 PCS	2.00
1,000 PCS	15.00

LED LAMPS

	1-99	100+
Jumbe RED	.09	.08
Jumbo GREEN	.16	.14
Jumbo YELLOW	.16	.14

INTERFACE CHIPS

8T26	1.54	8T98	.88
68T28	1.84	DM8131	2.90
8T95	.88	DP8304	2.24
8T96	.88	DS8835	1.94
8T97	.88	DS8836	.98

— TRANSISTORS —

2N918	.49	2N3563	.39	2N4402	.24
MPS918	.24	2N3565	.39	2N4403	.24
2N2102	.74	PN3565	.24	2N4857	.99
2N2218	.49	MPS3638	.24	PN4916	.24
2N2218A	.49	MPS3640	.24	2N5086	.24
2N2219	.49	PN3643	.24	PN5129	.24
2N2219A	.49	PN3644	.24	PN5139	.24
2N2222	.24	MPS3704	.14	2N5209	.24
PN2222	.09	MPS3706	.14	2N6028	.34
MPS2369	.24	2N3772	1.80	2N6043	1.70
2N2484	.24	2N3903	.24	2N6045	1.70
2N2905	.49	2N3904	.09	MPS-A05	.24
2N2907	.24	2N3906	.09	MPS-A06	.24
PN2907	1.20	2N4122	.24	MPS-A55	.24
2N3055	.78	2N4123	.24	TIP29	.64
3055T	.68	2N4249	.24	TIP31	.74
2N3393	.29	2N4304	.74	TIP32	.78
2N3414	.24	2N4401	.24		

DIP CONNECTORS

DESCRIPTION	ORDER BY	NO. of CONTACTS 8	14	16	18	20	22	24	28	40
HIGH RELIABILITY TOOLED ST IC SOCKETS	HRTxxST	.94	.94	.94	1.59	1.79	1.79	1.89	2.39	2.89
COMPONENT CARRIERS (DIP HEADERS)	ICCxx	.60	.70	.80	.95	1.15	1.15	1.25	1.40	2.00
RIBBON CABLE DIP PLUGS (IDC)	IDPxx	—	1.35	1.55	—	—	—	2.40	—	4.05

ORDER EXAMPLE: A 14-pin High Rel. ST socket would be **HRT 14 ST**

D-SUBMINIATURE

DESCRIPTION	ORDER BY		NO. of CONTACTS 9	15	25	37	50
SOLDER CUP	MALE	DPxxP	1.98	2.59	2.40	4.70	5.96
	FEMALE	DBxxS	2.56	3.53	3.15	7.01	9.14
RT. ANGLE PC. SOLDER	MALE	DBxxPR	1.55	2.10	2.90	4.73	—
	FEMALE	DBxxSR	2.08	2.93	4.32	6.09	—
IDC RIBBON CABLE	MALE	IDPxxP	3.27	4.60	6.13	9.12	—
	FEMALE	IDBxxS	3.59	5.03	6.74	9.98	—
HOODS	BLACK	HOOD-B	—	—	1.15	—	—
	GREY	HOOD	1.50	1.50	1.15	2.85	3.40

ORDER EXAMPLE: A **5-pin Male Solder Cup would be MALE DP 25 P**

IDC CONNECTORS

DESCRIPTION	ORDER BY	NO. of CONTACTS 10	20	26	34	40	50
SOLDER HEADER	IDHxxS	.77	1.19	1.58	2.10	2.48	3.14
RT. ANGLE SOLDER HEADER	IDHxxSR	.80	1.25	1.66	2.21	2.62	3.29
WW HEADER	IDHxxW	1.76	2.88	3.74	4.40	5.18	6.53
RT. ANGLE WW HEADER	IDHxxWR	1.95	3.18	4.12	4.35	4.70	7.20
RIBBON HEADER SOCKET	IDSxx	1.05	1.76	2.33	3.05	3.63	4.55
RIBBON HEADER	IDMxx	—	5.40	6.15	6.90	7.40	8.40
RIBBON EDGE CARD	IDExx	2.15	2.26	2.55	3.15	3.70	4.64

ORDER EXAMPLE: A 20-pin WW Header would be **IDH 20 W.**

SAFT Power Products:

STANDBY POWER — SUPPLIES —



Protect your computer and its precious data from black-outs or brownouts. Turns on if the power goes off at the wall outlet!

SPS0200VA/117V **$499.00**
SPS0400VA/117V **$699.00**

SURGE – SUPPRESSOR –



STOPS lightening bolts or other high energy line surges from damaging your computer's sensitive components.

SURGE SUPPRESSOR **$149.00**

– EMI/RFI FILTER –



Eliminates line noise caused by office equipment, printers, flourescent lights, switches, etc.

INTERFERENCE FILTER **$49.95**

LINE – CONDITIONER –

Isolation transformer is harmonic compensating to hold line voltage steady, regulated; also suppresses pulses and line noise.

LINE CONDITIONER **$395.00**

ORDER TOLL FREE
(800) 538-8800
(CALIFORNIA RESIDENTS)
(800) 848-8008

VISA MasterCard

APPLE & IBM ACCESSORIES

micromax
INNOVATORS IN MICRO-COMPUTER TECHNOLOGY

VIEWMAX-80 149.95
80-Column card for Apple II series
- Video Soft Switch
- Inverse Video
- VIDEX's Videoterm compatible



VIEWMAX-80e 119.95
80-Column extended video card for Apple IIe
- 64K RAM, expandable to 128K
- Double High-resolution circuit
- Compatible with Pascal & CP/M



PRINTMAX 59.95
Parallel printer card, Apple II series
- Centronics compatible
- Variable print widths
- Up to 5000 characters/second



Z-MAX-80 89.00
Z-80 card for CP/M on Apple II series
- Softcard and Z-Card compatible
- Full interrupt and DMA operation

GRAPHMAX 99.95
Dual High-Res graphics printer card for Apple II series
- Grappler+ compatible
- Color and Zoom magnification
- Inverse graphics
- 90-degrees Rotation
- Pascal and CP/M compatible

MULTIVIEW 80/160 249.00
80-160 columns with any monitor!
- Screens: 80x24, 80x32, 80x48, 96x24, 132x24, 132x30, 160x24
- On-screen BOLD and Underline
- Reverse scrolling
- Easy-to-read *Wide-angle* mode
- Apple II and IIe compatible
- Prompt lines
- Upper & lowercase letters



80 Column Apple II+	149.95
80 Column Apple IIE	119.95
Z80 Apple II+	89.00
Z80 Apple IIE	89.00
16K Card	39.95
Cooling Fan	38.95
Power Supply	74.95
Joystick	29.95
RF Modulator	13.95
Disk Drive	169.95
Controller Card	59.95
Paddles	7.95

COOLING FAN
38.95



APPLE COMPATIBLE POWER SUPPLY
74.95



- Powers Apple type systems
- +5V @ 5A +12V @ 3A −5V @ .5A −12V @ .5A
- includes instructions

16K RAM Card – Apple II+
- 2-Year Warranty



Assembled & Tested 39.95

APPLE COMPATIBLE DISK DRIVE



169.95
- Shugart mechanism, made in U.S.A.
- Directly replaces Apple Disk II
- Fully compatible with Apple Controller or other Apple compatible controllers.
- One Year Warranty

FULL or ½-Height

APPLE or IBM JOYSTICK
$29.95
Compatible for either:
APPLE II and APPLE IIe
OR
IBM-PC, JR., & IBM-XT

MULTIFUNCTION CARD



- 64K to 384K RAM
- Parallel Port
- Serial Port
- Clock Calendar
- Software Included
- 1-Year Warranty

$249.95

MEMORY CARD



- Expandable to 512K
- Fully compatible with IBM software
- Fully compatible w/IBM diagnostic utilities
- Serial Port Available
- 1-Year Warranty

$199.95

—VUTEK—
Color • Parallel • Serial Card



- Full bit-mapped Color Graphics
- Printer Port (LPT1, LPT2, LPT3)
- Serial Port (Com1, Com2)
- IBM PC, XT and Portable compatible
- Full software compatibility
- Compatible with Lotus 1-2-3, Multi-Plan and Flight Simulator
- Full 2-Year Warranty Parts and Labor

$249.95

DISK DRIVES

Tandon TM100-2	DS/DD	199.00
Teac FD-55B	DS/DD	159.00

MEMORY EXPANSION KIT



4164 200ns
9 for $29.97

DISKETTES 5¼"
– ATHANA –

SS/SD 15.90
SS/DD 16.90
DS/DD 22.90

SOFT SECTOR with HUB RING

BULK 5¼" DISKETTES
(NO LABEL)
SS/DD ... 10 for 14.90
100 up 139.00
(Lifetime Warranty)



The Flip Sort PLUS™
The new Flip Sort PLUS™ adds new dimensions to storage. Its smoked acrylic elegance holds over 100 diskettes with all the features you expect from the Flip Sort Family— $18.95



The FLIP SORT™
The new Flip Sort™ has all the fine qualities of the original with some added benefits: a new design and 50% greater capacity. Holds 75 diskettes and the price is now lower than ever— $12.95

ORDER TOLL FREE
(800) 538-8800
(CALIFORNIA RESIDENTS)
(800) 848-8008

DoKay

Inquiry 117

VT102

CONNECT YOUR PC TO YOUR DEC SYSTEM

PC100 turns your IBM PC/XT into a VT100/52 terminal. PC102 adds VT102 printer and file transfer support. PC102-132 supports true 132 columns. Guaranteed compatibility with all VT100/52 applications incuding: **EDT, WORD II, ALL-IN-ONE, DEC-CALC AND UNIX. PRICED FROM $89.**

- 110 through 9600 baud operations
- Complete keyboard and screen emulation
- Optional 4010 graphics support

GENERAL MICROSYSTEMS
6440 Flying Cloud Dr., Suite 205
Eden Prairie, Minnesota 55344
(612) 944-0593

CALL FOR FREE INFORMATION PACKAGE.

Inquiry 144

BASF FlexyDisks®

qualimetric

5¼"

Specify soft, 10 or 16 sector — Minimum Order 20

Single side double density	1.35 ea
Double side double density	1.55 ea

Hard sectors in Library box only add .15.
Certified Check - Money Order - Personal Check. Allow up to 2 weeks for personal checks to clear. Add $3.00 per 100 or part to each order for U.P.S. shipping charges.
NJ Residents add 6% sales tax.

DATA EXCHANGE, INC.
178 Route 206 South, P.O. Box 993
Department C
Somerville, N.J. 08876 • (201) 874-5050

Inquiry 99

NEW

Monitor Mover Gives Back the Desk



$149.95

- Models to fit most CRT's
- Rotates 360° on base
- Adjustable height
- Support tray swivels and tilts
- Holds up to 50 lbs
- Clamp, screw and wall mountings

LinTek
P.O. Box 8056
Grand Rapids, MI 49508
(616) 241-4040

Inquiry 203

BLUE BOOK

Prices shown for thousands of computers, software, and peripherals.

Each listing includes suggested list, avg. retail, wholesale, and used prices for all the geographical regions of the United States.

Send $12.95 + $.50 postage to:

NCDA
National Computer Dealers Association
5420 Hwy. 6 North
Houston, Texas 77084

Inquiry 409

INVENTORY CLEARANCE! IMMEDIATE DELIVERY!

General DataComm Dial Modems



103J-L
300 bps, full duplex. **$99.00**

113A 300 bps, full duplex. Reliable LSI design. **$149.00**

212A 1200 bps full duplex synch or asynch. 300 bps synch. **$299.00**

We also have quantities of 4800 and 9600 bps modems.

Call Toll Free 1-800-842-3672
General DataComm
Middlebury, CT 06762-1299

Add $5.00 shipping and handling
Conn. res. add sales tax.

Inquiry 143

CROSS SOFTWARE for the NS32000

INCLUDES:

★ Cross Assembler ★
★ Cross Linker ★
★ Debugger ★
★ N.S. ISE Support ★
★ Librarian ★
★ Pascal Cross Compiler ★
★ C Cross Compiler ★

U.S. prices start at $500

SOLUTIONWARE
1283 Mt. View-Alviso Rd.
Suite B
Sunnyvale, Calif. 94089
408/745-7818 ★ TLX 4994264

Inquiry 324

ELIMINATE CABLE SWAPPING
at a price NO ONE can beat!

COMPUTER SWITCH



PI-SWITCH lets you safely share your computer among multiple SERIAL or PARALLEL printers, modems, terminals, etc., all with just a flick of the wrist!

- Serial switch has female RS-232 connectors with gold plated pins. Uses lines 1-7 & 20 or can easily be reset by user.
- Parallel switch has female centronics connectors.
- All models have an attractive aluminum case.
- 30-day satisfaction guarantee.
- One year Warranty.
- Send for FREE leaflet that describes its many uses.

PI-02-S	Serial - Shares (2) devices	$59.95
PI-03-S	Serial - Shares (3) devices	89.95
PI-05-S	Serial- Shares (5) devices	109.95
PI-02-P	Parallel - Shares (2) devices	94.95
PI-04-P	Parallel - Shares (4) devices	184.95
CA-05-S	Serial Cable 5'	15.00
CA-05-P	Parallel Cable 5'	25.00

TERMS: VISA, MC, Check, MO or COD. Add $2.00 each for ground or $4.00 each for 2nd Day Air shipping.
Dealers and Custom Switch Orders Invited-Please Call

SAB LINK
7301 NW 41 ST.
MIAMI, FL 33166
(305) 592-6092

Inquiry 309

EPSON Printers



Lowest prices anywhere! Order by phone. Major credit cards accepted or C.O.D. We ship U.P.S.

Video Dynamics Inc.

in Illinois 1-312-593-2304
out of state 1-800-233-3472

Inquiry 364

ZENITH/ Heath Users



Double Your 5¼" disk storage capacity without adding a drive.

Get twice as much from your H88 or H89 microcomputer. Our FDC-880H floppy disk controller, in conjunction with your 5¼" drives, for example, expands memory capacity from 256 bytes to 512 bytes per sector.

And it handles single and double-sided, single and double-density, 8" and 5¼" drives — simultaneously.

C.D.R. Systems Inc.
Controlled Data Recording Systems Inc.
7210 Clairmont Mesa Blvd., San Diego, CA 92111
(619) 560-1272

Inquiry 408

PIPELINE COMPUTERS

The Source FOR IBM SYSTEMS

IBM SYSTEM NO. 1* ONLY $1650

★ 256K of Memory
★ One 360K Disk Drive
★ Hi-Res Monitor
★ Pipeline Color Graphics Card

IBM SYSTEM NO. 2* ONLY $2050

★ 256K of Memory
★ Two 320K Disk Drives
★ Hi-Res Monitor
★ Pipeline Color Graphics Card
★ AST SixPac + w/64K

IBM SYSTEM NO. 3* ONLY $2295

★ 256K of Memory
★ IBM Monochrome Monitor
★ IBM Monochrome Adaptor w/Par. Port
★ Epson RX80 Printer w/6 ft. Cable

IBM SYSTEM NO. 4* ONLY $3095

★ 256K of Memory ★ One 360K Drive
★ 10 Meg. Hard Disk
★ AST Six Pac w/64K
★ 1200 Baud Modem ★ Hi-Res Monitor
★ Pipeline Color Graphics Card
★ Epson RX80Printer w/Cable

*All systems come with: 90 day warranty; Burned in and tested for 24 hours; Fully Assembled

MEMORY UPGRADE KIT

★ 9 - 4164
★ 200 ns
(Not made by Micron)
$27.95 a set

ANCHOR MODEM

★ 300 Baud
★ Internal — IBM Compatible
List $199 Our Close Out Price
$59

MEMORY UPGRADE FOR PC AT

$169 a set

EPSON PRINTER

★ RX80FT
★ 100 cps
★ Friction & Tractor Feed
$279

The Source!

PIPELINE COMPUTERS

- We Accept MC, Visa, Wire Transfers, Certified Checks
- COD's Available
- No Surcharge for Credit Cards
- Shipping Minimum $5.00
- Purchase Orders Accepted
- This Ad Supersedes all Others

Inquiry 276
Prices Subject to Change

The Source!

We Specialize in IBM & Compatible Products

Call (800) 841-0905 For All Your PC Needs

IBM & COMPATIBLE COMPUTERS

IBM

PC w/64K, 1 Drive	$1349
PC w/256K, 2 Drives	1549
PC XT, 256K 10 Meg Disk	3395

COMPAQ

Compaq, 256K, 2 Drive	$2250

SANYO

MBC 550, 1-Drive, software	$ 699
MBC 555, 2-Drives, 160K ea.	999
MBC 550-1, 1-Drive, 320K	799
MBC 555-2, 2-Drives, 320K ea.	1099
Optional Serial Port	79
Optional Drive w/Software	189

TAVA

2-Drives, 128K, 2 Ser. 1 Par. Port, Color Graphics Card & Hi-Res. Green Monitor . . . $1595

IBM COMPATIBLE DISK DRIVES

TANDON

TM-65-2, ½ Height (360K)	$ 179
TM-100-2 (320K)	$ 149

TEAC

FD55B, ½ Height (320K)	$ 129

MATSUSHITA

Same as Panasonic, ½ Ht. 360K	$ 129

SHUGART

SAU55, PC Compat. (320K)	$ 125

CDC

9409, (320K)	$ 189

MONITORS

AMDEK

300G, 12" Green	$ 129
300A, 12" Amber	139
310A, 12" Amber Monochrome	165
Color I + Color Composite	299
Color II + RGB w/Cable	409

PRINCETON GRAPHICS

PGS HX12	$ 469
PGS MAX12	189
PGS SR12	640

TAXAN

420 (PGS Compatible)	$ 399
425 RGB & Green	439

INTERFACE CARDS FOR IBM AND COMPATIBLES

AST RESEARCH

SixPac + 64K Par. & Ser. Software	$ 249
Mega + 64K exp. to 512K Ser. Port	259
MegaPack 256K option for Mega	269
I/o + Ser. & Optional Par. Game	149
Additional Ports	49

QUADRAM

Color I	$ 209
Color II	229
Quadlink	499
Quad Board 64K w/Game Port	279
Quad Board II	269

HERCULES

Color Graphics Card	$ 189
Monochrome Graphics	329

PLANTRONICS

Color +	$ 379

IBM

Dos 2.1	$ 49
Dos 3.0	59
Monochrome Monitor or Adaptor	229

FLOPPY DISK CONTROLLERS

Maynard	$ 169
Maynard w/Ser. Port	229
Maynard w/Par. Port	229
Sigma Controller	159
Pipeline Controller	129

DUST COVER

Covers Monitor, Mainframe & Keyboard	$ 29

MORE ACCESSORIES

Koala Graphics Tablet	$ 85
8087 Co-Processor	149
Kraft Joystick	39
Par. Printer Cable	24

USI

Paradise	$ 299
Modular Card	325
Module A	89
Module B	229

PIPELINE

Color Graphics Card	$ 169

VUTEK

Color Card w/Par. & Ser. Ports	$ 249

PC PEACOCK

Color board w/Par.	$ 219

MODEMS

HAYES MICRO INC.

Smart Modem 300	$ 205
Smart Modem 1200	489
1200B for PC	399

ANCHOR

Mark VI 300 Baud, Internal	$ 59
Mark XII 1200 Baud	239

PROMETHEUS

ProCom 1200	$ 339

RIXON

PC212A, 1200 Baud Stand Alone	$ 399

U.S. ROBTICS

Password, 1200 Baud	$ 319

PRINTERS

OKIDATA

ML 92A (160 cps)	$ 359
ML 93A (160 cps)	589
92 & 93 Plug & Play	49

STAR MICRONICS

Gemini 10X, 120 cps	$ 259
Gemini 15X, 120 cps, 15" car.	389

JUKI

6100, 18 cps ltr. qual.	$ 399
Tractor Feed	129

EPSON

RX80	$ 269
RX80FT	279
RX80	439
FX100	659

DISKETTES

PIPELINE

Dbl./Dbl. Reinforced Hub 1 year warranty	$ 18
Flip File Holds 70 (smk. plexiglass)	16

Your IBM Connection!

PIPELINE COMPUTERS

Inquiry 276

ORDER DESK:
(213) 320-6822
(800) 841-0905
(OUTSIDE CALIFORNIA)

MAIL ORDER & WAREHOUSE:
20317 Western Avenue
Torrance, CA 90501

ORDER TOLL FREE

800-345-7100

ORDERS INSIDE CALIF. 213-675-2115

CUSTOMER SERVICE and TECHNICAL HELP (ask for Martin) 213-675-2382

$av-On Computers, Inc.

Inquiry 312

HAPPY NEW YEAR FROM THE STAFF AT $AV-ON COMPUTERS

COMPUTERS

SANYO

MBC550 — Includes 128K Memory, 5¼ Disk Drive, Parallel Printer Port. CPU has RGB Color and Monochrome Composit Video. Software includes: Sanyo BASIC, Wordstar, Calcstar and Easywriter. **Call for Price**

MBC555 **Call for Price**

Sanyo Monitors, Serial Cards, Upgrades Avail. from $av-On **Call for Prices**

COMPAQ

COMPAQ PLUS 2 Drives (1 Floppy & 1 10 Meg) & 256K **$3740**
DESK TOP Model 1 **Call**
DESK TOP Model 2 **For**
DESK TOP Model 3 **Pricing**

CALL FOR PRICING ON APPLE, KAYPRO, TAVA, ZENITH, EPSON, NEC, COLUMBIA AND OTHER CPU's.

WE CAN GET YOU THE LOWEST PRICE AROUND

PRINTER INTERFACE and PERIPHERALS

PRINTER CABLES

ALL MAKES (6 foot long) **$20**

FOURTH DEMINSION

PAR CARD & CABLE for Apple **$48**

ORANGE MICRO

GRAPPLER + ... **$119**
GRAPPLER + w/16K **175**

OKIDATA

SERIAL INTERFACE **$89**

MICRO TEK

DUMPLING GX **$85**
DUMPLING GX (Exp to 64K) **145**
BAM 16 ..... **Call**

PRINTERS

STAR MICRONICS

GEMINI 10X (120cps) **$259**

OKIDATA

82A (120cps par. & ser.) **$299**
92P (160cps) **399**
84P (200cps) ..... **Call**

EPSON

RX80FT (120cps, Fric/Tractor) **$299**
FX80 (160cps) **$399**

JUKI

6100 (18cps & let. quality) **$409**

BROTHER ..... **Call**

DYNAX ..... **Call**

NEC ..... **Call**

MONITORS

PRINCETON GRAPHICS

HX12 (High Res, IBM Compatible) **$459**
SR12 ..... **Call**
MAX12 ..... **185**

AMDEK

300G 12" Green **$126**
300A 12" Amber **135**
310A 12" Amber (Monochrome) **160**
COLOR I+ (Color Composite) **299**
COLOR II+ (RGB w/Cable) **409**

ZENITH

ZVM122 12" Amber **$99**
ZVM123 12" Green **99**

LEADING EDGE

GORILLA 12" Green **$89**
GORILLA 12" Amber **99**

TAXAN

121 **Call, We Have**
122 **The Lowest**
420 **Priced Taxan**
440 **Monitors In Town**

MODEMS

HAYES

300 ..... **$199**
1200 External, PC Compatible **469**
1200B Internal, PC Compatible **399**
MICRO MODEM IIe **239**

NOVATION

ACCESS 123 ..... **Call**
J-CAT ..... **Call**
APPLE CAT ..... **Call**

ANCHOR

MARK VII (300 Baud) **$99**
MARK XII (1200 Baud) **239**
MARK VI **69**
CALL FOR PRICING ON OTHER MODEMS

The $av-On Sytems

THE PROFESSIONAL SYSTEM

APPLE

2 Drives, 80 Col Card, Apple Monitor
Very Nicely Priced
At A Very Very Low **$1295**

PORTABLE COMPUTER

DATA GENERAL

Small Enough to Fit In A Brief Case
PC Compatible
Low Priced **Call**

COMPAQ

2 Drives with 256K

$2195.00

APPLE ADD-ONS

TG

JOY STICK **Call For**
SELECT PORT **Lowest**
PADDLES **Prices**

MICROMAX

VIEWMAX 80 ..... **$130**
VIEWMAX 80e **130**

KENSINGTON

SYSTEM SAVER **$69**
MORE AVAILABLE ..... **Call**

WE ARE THE NEW SOURCE FOR LOW PRICED COMPUTERS

IBM PRODUCTS

IBM COMPUTERS	1 up	5 up	10 up
IBM PC 64K with 1 Drive	$1330	$1315	$1300
IBM PC 256K with 2 Drives	1575	1550	1525
IBM PC XT 128K w/1 Drive & 10Mb	3299	Call	Call
IBM PC AT	Call	Call	Call
IBM PORTABLE (Any Configuration)	Call For	Low	Price

TEAC	1 up	5 up	10 up
TEAC 55B (½ High Drive for PC)	$135	$130	$125
INTEL			
INTEL 8087-3 Math Coprocessor	$129	$125	$120
MEMORY (NEC, TI, Others)	100 up	1000 up	2000 up
RAM CHIPS (All are 200nS or faster)	$3.00	$2.75	$2.50

DRIVE CONTROLLER CARDS

IBM Original (Controls 4 drives)	$139
MAYNARD (Any Configuration)	Call
IBM Copy (120 Day Warranty)	119

COMPATIBLE DRIVES FOR PC

CDC (IBM Compatible)	$159
TANDON Full Hight 320K	159
MPI A2 (IBM Compatible)	119

HARD DISKS TALLGRASS

20Mbyte w/20Mb Back-up	Call
35Mbyte w/45Mb Back-up	Call
70Mbyte w/60Mb Back-up	Call

MAYNARD, ALPHA OMEGA, GENIE CALL FOR PRICING

L.D.C.

LOTUS 123	Low Low
SYMPHONY	Priced

AST

SIX PAC PLUS (1 Ser/1 Par Port, Clock w/0 memory)	$219
SIX PAC PLUS (1 Ser/1 Par Port, Clock & 64K exp. to 384K)	259
SIX PAC PLUS (1 Ser/1 Par Port, Clock & 384K Memory)	399
I/O PLUS (1 Ser & 1 Clock)	129
I/O PLUS (1 Ser/ 1 Par & Clock)	165
MEGA PLUS (64K)	259
MEGA PAC (256K)	249

OTHER AST BOARDS AND ADDITIONAL PORTS AVAILABLE CALL FOR PRICES

QUADRAM

COLOR 1	$209
COLOR 2	Call
QUADBOARDS	Call

HERCULES

MONOCHROME (Hi Res Graph Card)	$339
COLOR CARD	199

TECHMAR

GRAPHICS MASTER (Runs Mono & Color, High Res in Both Modes ... $469

STB

GRAPHICS (PLUS) II Supports Both Color and Mono Display. You'll get 50% faster flicker-free scrolling over IBM's color graphics board. Call for more information ... $349

PC PEACOCK

COLOR BOARD with Parallel Port ... $218

PLANTRONICS

COLOR PLUS ... Call

OTHER BOARDS AVAILABLE CALL FOR LOWEST PRICES!

KEYTRONICS

5151 Keyboard w/Sep Num. Pad	Call
5150 Keyboard	Call

MEMORY UPGRADES

4164 (9 Chips)	$37

New Years Specials

MONOCHROME SYSTEM

IBM PC

w/2 Drives, 256K Memory
Mono Monitor & Mono Card w/Par Port

$1995.00

COLOR SYSTEM

IBM PC

w/2 Drives, 256K, Color Card, HX12

$1995.00

IBM PC

256K, 1 Floppy & 10 Meg Hard Disk

$2195.00

100% IBM PRODUCTS

IBM CARDS

MONO CARD w/Parallel Port)	$219
COLOR CARD	189

IBM MONITORS

MONOCHROME MONITOR	229
COLOR MONITOR	Call

IBM

DOS 2.1	$58
DOS 3.0	Call
PRINTER PAR PORT	75
IBM to PRINTER CABLE (6 foot)	$18

FINANCING AVAILABLE
with Approved Credit

SEE US AT THE MONTERY COMPUTER SHOW AND SALE
Jan. 12 (11-6) & Jan. 13 (10-5)
FOR SUPER AFTER CHRISTMAS SPECIALS
Conference Center, Montery, Calif.

SPEND ON COMPUTERS WITH THEM — $AV-ON COMPUTERS WITH US!

$av-On Computers, Inc.

12595 Crenshaw Blvd., Hawthorne, CA 90250

OPEN: 7:30am till 6:00pm Mon.-Fri.
9:00am till 2:00pm Sat.

Inquiry 312

TERMS: We accept Visa, MasterCard, COD's, and Wire Transfers. No surcharge for Credit Cards. UPS, Federal Express and Emery shipping available. Calif. residents please add 6½% sales tax to order. Prices subject to change without notice. Not responsible for typographical errors.

S-100™ ESTABLISHED 1977

SALES 800-528-3138
TECHNICAL 602-991-7870
TELEX 165025 FTCC SEC PHX

CompuPro®

SYSTEM 816/A SINGLE-USER	$4,199
SYSTEM 816/B TWO-USER	$4,899
SYSTEM 816/C MULTI-USER	$6,299
FOR 40Mb H.D. OPTION ADD	**$1,900**
TO HAVE 2ND 8" FLPY W/ H.D.	$500

5¼" H.D. SUBSYSTEMS
W/ CTRL. BD. CABLES, CAB., FAN, P/S, ETC.
30-45 mSEC AVG. ACCESS

BY S-100 FOR CompuPro

W/ CP/M 80 & CP/M86 DRIVERS

40Mb	45mSEC ACCESS TIME	$1,949
65Mb	30mSEC ACCESS TIME	$2,695
105Mb	30mSEC ACCESS TIME	$3,695
140Mb	30mSEC ACCESS TIME	$4,395

SEE ALLOY FOR TAPE BACK-UP

SYSTEM 816/10 H40 40Mb H.D.	$5,595
CPU 286 A&T W/ 287 MATH CHIP	$1,513
CPU Z 6MHz A&T	$229
CPU 8085/88 A&T	$349
HUDSON 8087 PIGGY BACK FOR 8085/88	$446
CPU 8086 10MHz A&T	$569
CPU 68K 10MHz CSC	$600
RAM 22 256K STATIC 8&16 A&T	$1,075
RAM 23 - 128K	$595
M-DRIVE/H 512K RAM-DISK	$895
INTERFACER 1 - 2 SERIAL PORTS	$189
INTERFACER 3-8 SERIAL A&T	$489
INTERFACER 4-3 SERIAL/2 PARALLEL	$319
SYSTEM SUPPORT 1 A&T	$319
DISK 1A 5¼" & 8" FLPY CTRL	$489
DISK 2 A&T 8" H.D. CNTRL SET	$559
FUJITSU 2302B 20Mb ADD-ON H.D.	$2,695
DISK 3 A&T 5¼" H.D. CNTRL. W/ CP/M 80&86	$559

KONAN

SMC-200 DUAL DRV. SMD I/F CTRL BD.	$500
DGC-100 CTRL BD./5¼" H.D., ST-506 I/F	$325

MORROW

PIVOT 9 LBS. DUAL DRVS. MSDOS, MODEM & MORE	CALL
MD3 SYSTEM W/ TERMINAL & EPSON RX80FT PRT.	$1,999
MDP-3 PORT. SAME AS MD3 EXCEPT WITH 5X7" SCREEN & EPSON RX80FT PRT.	$1,329
MD5-E W/ 1 FLPY & 5Mb H.D.	$1,825
MD11 SYSTEM W/11Mb H.D., 128K, 1DSDD DRV., TERMINAL, CP/M 3.0, ALL MD3 SOFTWARE EPSON FX80 160 CPS DOT MATRIX OR BROTHER HR-15 13 CPS DAISY PRINTER	$2,995

ADS

PROMBLASTER 2 W/EXTEND MODULE PROGRAMS 27256 EPROMS @ 45 SEC.	$398
KLUGE CARD KIT INCLUDES ALL START-UP HARDWARE	$129
OCTAFLOPPY W/CP/M OBJECT & SOURCE	$379

Cromemco

FFP FAST FLOATING POINT	$2,369
MCU MEMORY CONTROL/FOR 512MSU	$419
512MSU ERROR CORRECTING MEMORY	$2,119
68000 CROMIX MULTI-USER/TASK. DOS	$506

Electralogics

QUASI-DISK 512K RAM-DISK W/ON-BD. DRV. STATUS LED'S WRITE PROTECT, DMA E-Z INSTALL W/SAMPLE CP/M BIOS	$795
512K PIGGY-BACK EXPANSION	$595
BATTERY BACK-UP W/PWR. SUPPLY	$169
MFIO ALL-IN-ONE I/O BD. IEEE S-100/696 8 ASYNCH. SERIAL, 2 PARA., BAUD RATE GEN., CLOCK-CAL/BATT., PROG PRIORITY INTERRUPT W/8 LEVEL CTRL PERSONALITY BDS & CBLS OPTIONAL	$469
SERIAL OPTION BD. FOR MFIO	$25
CENTRONICS PARA OPTION FOR MFIO	$39

Tarbell

DUPLEX 816 8MHz 80186 AND Z80H, 2 SERIAL, 16Mb MMU, 5 & 8 FLPY. DMA CTRL., WITH CONCURRENT CP/M86 SINGLE-USER	$1,400
W/ CONCURRENT CP/M86 MULTI-USER	$1,675

SYNTECH DATA SYSTEMS

SBC8/16 DUAL CPU EXECUTES Z80 & 8088 CODE, 5¼" & 8" FLPY CTRL, 2S, 8 VECTORED & REAL TIME INTERRUPTS	$689
EXPANDORAM V 256K	$652

ADVANCED DIGITAL CORPORATION

PC-SLAVE/16-256K 8MHz 2 SERIAL PORTS — TURN YOUR PC INTO A HIGH SPEED MULTI-USER MACHINE W/ TODAY'S TECHNOLOGY	$750
SUPER SIX 128-6MHz	$739
SUPER SLAVE 128-6MHz	$525
SUPER 186/256K MSTR/SLAVE-4 USERS	$1,295
CP/M 3.0	$300
TURBODOS VER. 1.4 8 BIT MULTI-USER	$450
HDC 1001-5 5¼" H.D. CONTROLLER	$435

Intercontinental Micro Systems

CPZ 48006 6MHz MASTER	$739
256KMB MEMORY BOARD	$709
CPS-B4D 64K RAM SLAVE 6MHz	$389
CPS-B6A 128K RAM SLAVE 6MHz	$529
MUTD-E Z80 MULTI-TURBODOS	$556

PRACTICAL PERIPHERALS

MICROBUFFER EPSON "CARDS":	
MBS-16K SERIAL	$117
MBS 32K SERIAL	$153
MBS 64K PARALLEL	$195
MEM 32K EXPANSION MODULE	$58
MICROBUFFER IN-LINE "STAND ALONES":	
MBIS SERIAL 64K	$244
MBIP PARALLEL 64K	$244
MEM-64 EXPANSION MODULE	$118
APPLE II, II+, IIE MICROBUFFER II+ 16K	$181
PROCLOCK/APPLE II, II+, IIE	$108
SERIALL/APPLE II, II+, IIE W/ RS232 COMMUNICATIONS & GRAPHICS	$119
GRAPHICARD W/ ON-BD S.W. FOR 35 PRT	$65

POWER SOLUTIONS

Litton JEFFERSON ELECTRIC

TRUE SINE WAVE. 100% BATTERY OPER. W/NO SWITCH-OVER, BYPASS STATIC SWITCH 750 WATTS @ 15 MIN. #370-811-100	$1,875
3 0MIN. W/AUXILIARY BATTERY	$435

TRIPP LITE — STAND-BY POWER W/ YUASA BATTERY EXCELLENT FOR SWITCHING P/S PC's

SB-400-LVC 1 HR+ @ 400 WATTS	$395
SB-1000 1/2HR+ @ 1000 WATTS	$695
BC-425-FC 425 WATTS, 4 OUTLETS, 10 MINUTES	$469
BC-1000-FC 1000 WATTS, 4 OUTLETS, 16 MINUTES	$1,949

ISOBAR SUPPRESSOR & NOISE FILTERS:

IBAR 2-6 2 OUTLETS & 6 FT. CORD	$40
IBAR 4-6 4 OUTLETS & 6 FT. CORD	$55
IBAR 8-15 8 OUTLETS & 15 FT. CORD	$65

SOFTWARE

SOFTWARE IS NOT RETURNABLE

BDS "C" COMPILER-8 BIT	$99
COMP. INN. C86 C COMPILER	$299
COMPUVIEW VEDIT-86 = $156 MS-DOS=	$120
SORCIM SUPER CALC-3 IBM-PC	$245
DATAFLEX MULTI-USER FILE & RECORD LOCKING DBMS AVAIL. FOR MOST O/S FORMATS	CALL
NEW WORD WORD PROCESSOR WORDSTAR COMPATIBLE BUT EASIER W/ MERGE PRINT IN SINGLE OR MULTI-USER CP/M 80 OR 86 & MS-DOS FORMATS	$169
LATTICE C (CP/M86 & MS/PC-DOS)	$298
CP/M86 8"	$345
C FOOD SMORGASBORD OF ROUTINES	$99
HALO (1 LANGUAGE) GRAPHICS SUB ROUTINES FOR PC-DOS ONLY	$99
PLINK PC/86 LINKAGE EDITOR FOR OVERLAY SCHEMES	$275
PANEL PC/86/80 CUSTOMIZED TERMINAL DISPLAYS	$239

DIGITAL RESEARCH

"C" LANGUAGE COMPILER-86		$229
CP/M PLUS (3.0)		$245
ACCESS MNGR.	80 = $195	86 = $260
DISPLAY MNGR.	80 = $260	86 = $325
SPEED PROG. PKG.	80 = $130	86 = $163
C BASIC COMPILER	80 = $325	86 = $390
PASCAL MT+	80 = $225	86 = $390
PL/1 W/ UTILITIES	80 = $359	86 = $488
ASMBLR + TOOLS	80 = $130	86 = $130

FLUKE — FLUKE 77 DVO METER 0.3% DC ACCURACY $119

Votrax — PERSONAL SPEECH SYSTEM $285

Giltronix — SWITCH BOXES

FOR NETWORKING MULTIPLE PRT.'S, MODEMS TERMINALS &/OR SYSTEMS BY MANUAL OR AUTO WITH SOFTWARE CONTROL CALL

S-100

S-100 DIV./696 CORP.
14455 NORTH 79TH ST.
SCOTTSDALE, AZ 85260

FULL DEALER SUPPORT
VISIT OUR SHOWROOM

WORLD'S LARGEST SELECTION OF S-100 PRODUCTS

S-100™

ProModem 1200 from... PROMETHEUS

HAYES COMMAND COMPATIBLE
WITH HELP MENU $325
WITH MACPAC $389

U.S. ROBOTICS

PASSWORD 1200 AUTO ANS./DIAL $295
AUTO DIAL 212A (HAYES COMPAT.) $395
IBM PERSONAL MODEM W/ TELPAC $289
IBM PERSONAL MODEM W/ 64K, PRT PORT, CLOCK, TELPAC S.W. $469
IBM PERSONAL MODEM W/ 256K, ETC. $759
TELPAC MSDOS/ CP/M 80 $79

TERMINALS

LIBERTY TERMINALS
W/OPTIONAL 14" SCREEN $20
W/OPTIONAL AMBER SCREEN $40
LIBERTY FREEDOM 110 $475
LIBERTY FREEDOM 200 $539
LIBERTY FREEDOM 210 GRAPHICS, 14" SCREEN, TEKTRONIX 4010/4014 COMPAT., 655X290 RES. WITH FREEDOM 200 SPECS $995
LIBERTY FREEDOM 220 DEC VT52, 100 & 220 COMPATIBLE $619
LIBERTY FREEDOM 240 DEC GRAPHICS SAME AS FREEDOM 210 EXCEPT HAS FREEDOM 220 SPECS. $1,075

QUME QVT 102G $419

WYSE-50 14" 132 COLUMN $519

MONITORS

AMDEK 300 GREEN MONITOR $129
AMDEK 300A AMBER MONITOR $145
AMDEK 310 IBM AMBER $159
PRINCETON GRAPHICS HX-12 $469
TAXAN RGB VISION 420 $469
USI 12" HI-RES AMBER $89
ZENITH ZVM 122A AMBER NON-GLARE $85
ZENITH ZVM 123A GREEN NON-GLARE $85
ZENITH CV-1952 19" RGB/COMP. $375

PRINTERS

BROTHER DAISYWHEEL
HR-15 SER. OR PAR. 13 CPS $375
HR-25 SER. OR PAR 23 CPS $649
HR-35 SER. OR PAR. 36 CPS $849
BROTHER DOT MATRIX 2024L 24 PIN HEAD, GRAPHICS, 80 CPS L.Q. & 160 CPS DRAFT $925
DAISYWRITER 2000 40 CPS DAISY CUT SHEET FEEDER $795 $495
EPSON ALL MODELS & ACCESSORIES CALL
OKIDATA ALL MODELS & ACCESSORIES CALL
TALLY MT160L 160 CPS S-OR-P $550
TEXAS INST. TI855 W/ TRACTOR $798

INDUSTRIAL QUALITY CABINETS

DUAL ½HI HORIZ. 5¼" FLPY $75
SINGLE STD. HI HORIZ. 5¼" FLPY $59
5¼" H.D. CABINET W/ P.S. & FAN $225
DUAL 8" ½ HI FLPY HORIZONTAL OR SINGLE STD. 8" FLPY $215

INTEGRAND

800 DB2F W/ NECESSARY OPTIONS $495
800 DW SAME AS ABOVE W/ PROVISION FOR 8" H.D. $575
1100D W/ OAK SIDE PANELS $445

DISK DRIVES

WE SERVICE FLOPPY DRIVES
5¼" OR 8" + PARTS + SHIP. $50

Tandon 100-2 5¼" DSDD $159

Qume 1 YEAR WARRANTY
142 DSDD 5¼"½ HI $149
242 DSDD 8"½ HI $359
842 DSDD 8" STD HI $449

MITSUBISHI ELECTRONICS
4851 ½ HT 5¼" 48TPI $159
4853 ½HT 5¼" 96TPI $179
M2894 STD 8" DSDD $399
M2896 ½ HI 8" DSDD $399

SANYO
5¼" ½HI FLPY. DIRECT DRV. 1 YR. WARR. $119

CALL FOR LOW, LOW PRICES ON SUBSYSTEMS

ALLOY
IDXCS-100T TAPE BACK-UP FOR S-100 BUS COMPUTERS W/HARD DISK 17.6Mb on 555' CARTRIDGE TAPE INCLD'S ALL SOFTWARE, CTRL. BD., CABINET, DRIVE, AND CABLES $1,949
IDS-412 SCSI/SASI 17.6Mb CARTRIDGE TAPE BACK-UP EXCELLENT FOR COMPUPRO 816/IO $1,949
PCQICTAPE IBM-PC BACK-UP TO 60Mb IN 10 MIN. OR LESS $1,995

Amcodyne
ARAPAHOE 7110 25Mb FIXED & REMOVABLE 8" H.D. W/35 mSEC. AVG. ACC.
FULL CDC LARK COMPATIBLE $3,995
OPTIONAL P/S $285
25Mb 8" DYSAN CARTRIDGE $140

ST506 5¼ INCH BARE HARD DRIVES

Shugart
SA712 ½ HT. 10Mb $498

RODIME
RO203 20Mb $739
RO204 27Mb $888
RO203E 40Mb $1,250
RO204E 53Mb $1,395

QUANTUM
Q540 42.66Mb 45m SEC ACCESS $1,475

Maxtor
XT-1065 66.99Mb 30m SEC ACCESS $1,995
XT-1105 105.27Mb 30m SEC ACCESS $2,995
XT-1140 143.55Mb 30m SEC ACCESS $3,749

MICROPOLIS
MP1302 25.9Mb 30MS AVG. ACCESS $1,425
MP1303 43.2Mb 30MS AVG. ACCESS $1,825
MP1304 51.9Mb 30MS AVG. ACCESS $1,939

IBM®

64K RAM 4164-150 NS 9 CHIPS/SET $27

HARD DISK SYBSYSTEMS:
10Mb "PC-INSIDER" $719
21Mb "PC-OUTSIDER" $1,375
33.3Mb "PC-OUTSIDER $1,775
44Mb "PC-OUTSIDER" $1,995
56Mb "PC-OUTSIDER" $2,695
90Mb "PC-OUTSIDER" $3,695
120Mb "PC-OUTSIDER" $4,495

STB
RIO PLUS: RS232 S, P I/O, G, CLK/CAL. 64K & PC ACCEL. STB-RIO+64 $257
GRAPHIX PLUS II: RGB & MONOCHROME PRINTER & LT. PEN PORTS $325
SUPER RIO: RAM-IO MULTI-FUNC. W/ 64K (UPGRD TO 768K), 2S, 1P (IBM COMPAT.) 1G, CLK/ CAL.
STB-SRIO-64 $275
STB-PB-64 PIGGYBK (EXPAND. TO 512K) $165
MEMORY EXPAN. BD: 64K (EXPAND TO 384K) STB-1-64 $195

IBM-AT COMPATIBLE BDS:
RIO GRANDE 128K TO 1.5Mb, S&P PORT., OPT. SERIAL & GAME PORT $357
GRANDE BYTE 128K EXPANDABLE TO 2Mb FOR IBM-AT $257

TECMAR
IBM-AT/MAESTRO W/O RAM TO 2.1Mb S & P PORT, TREASURE CHEST, PRINTER & MEM DISK SOFTWARE $399
CAPTAIN 64K, IS, IP, CLK/CAL $269
WAVE 'XT' MEMORY BD 64K $210
DYNAMIC MEMORY-256K $289
GRAPHICS MASTER - HIGH RES. COL. (640X400), MONO (720X700), RGB, NTSC COMPOSITE & IBM MONO. MON., 128K, LT. PEN INTERFACE $439
GRAPHICS TENDER MONOCHROME & PARALLEL PRINTER $199
jr CAPTAIN 128K P.C. 1 YR BATT. LIFE $319
jr WAVE 128K $309
jr CADET 64K ADD ON PIGGYBACK BD for jr CAPTAIN/WAVE $159
jr 2ND MATE PARA. PRT. PORT & CLOCK/CAL. W/ BATT. BACK-UP $119

Mac Drive
73010 5MbREMOVABLE H.D. $1,459
73020 2X 5MbREMOVABLE H.D. $2,429
73200 10Mb FIXED H.D. $1,459
73210 10Mb FIXED W/ 5Mb REMOVABLE CARTRIDGE $2,429

ZENITH data systems
MICROSOFT WORD W/MAIL LIST & MULTI-PLAN INCLUDED W/ALL ZENITH CPU'S UNTIL JAN. 85.
Z-150 PC THE MOST COMPATIBLE PC $2,095
Z-150 PC (W 10.6Mb H.D.) $2,888
Z-160 PC PORTABLE $2,249
STANDARD-NET FOR IBM & Z150 PC'S INCLD's CABLE, BD., SOFTWARE & INSTALL GUIDE $599

TTX UNIVERSAL 64K BUFFER "IN" S OR P "OUT" S OR P $209

PRICES ARE CASH PREPAID & MAY CHANGE WITHOUT NOTICE. SHIPPING, INS., HANDLING EXTRA

Inquiry 307 for Dealers.
Inquiry 308 for End-Users.

SUBJECT TO AVAILABLE QUANTITIES
HRS: 8:30AM — 5:00PM M-F

S-100

HOW TO BE A

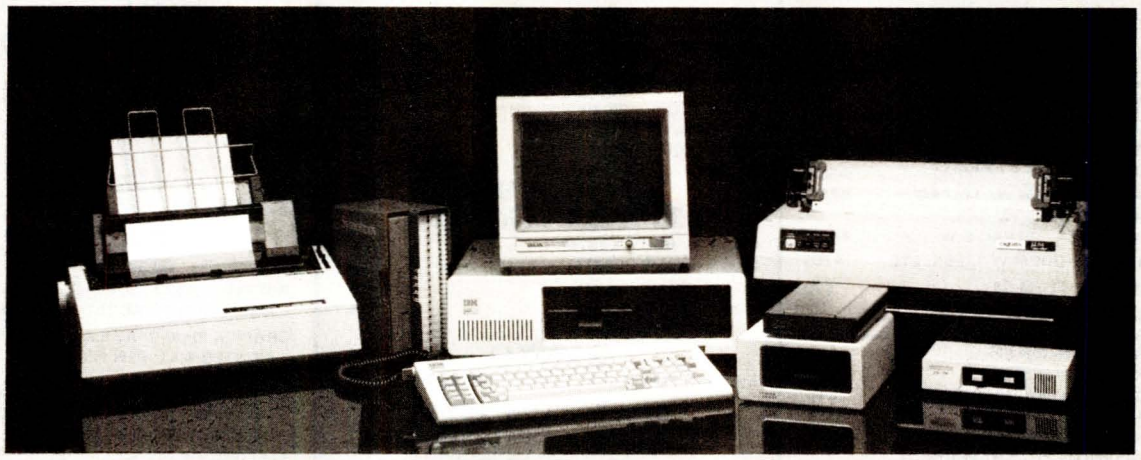

Call for an IBM PC system custom enhanced to meet all your business needs.

Printers:

EPSON JX-80 (160cps, 10", 8 colors)	**BEST PRICE**
EPSON FX-80 (160cps, 10")	**$425**
EPSON FX-100 (160cps, 15")	**$625**
EPSON RX-80 (100cps, 10")	**$245**
EPSON RX-80F/T (100cps, 10" w/platten)	**$295**
EPSON RX-80F/T PLUS (100cps,10" w/platten,near LQ)	**CALL**
EPSON RX-100 (100cps, 15" while they last)	**$425**
EPSON LQ-1500 (LQ dot matrix w/ par. interface)	**CALL**
OKIDATA ML92 (160cps, 10")	**NEW-BEST PRICE**
OKIDATA ML93 (160cps, 15")	**NEW-BEST PRICE**
OKIDATA ML84 (200cps, 15")	**$795**
OKIDATA PACEMARK 2410 (350cps, 15")	**$1995**
GEMINI 10X (120cps, 10")	**$275**
GEMINI 15X (120cps, 15")	**$395**
DATAPRODUCTS 8010 (180cps, dot matrix, 10")	**CALL**
DATAPRODUCTS 8020 (180cps, dot matrix, 15")	**CALL**
DATAPRODUCTS 8050 (200cps, dot matrix, 15")	**CALL**
DATAPRODUCTS 8070 (400cps, dot matrix, 15", LQ)	**CALL**
TOSHIBA P1340 (LQ dot matrix, 10")	**$745**
TOSHIBA P1351 (LQ dot matrix, 15")	**$1295**
TI-855 (LQ dot matrix w/font cart)	**PRICE REDUCTION**
DIABLO 630API (40cps LQ)	**$1595**
DIABLO 630ECS (192 chars on wheel)	**$1995**
NEC 2050 (Durable, low cost LQ)	**BEST PRICE**
NEC 3550 (33cps LQ)	**NEW LOW PRICE**
NEC 7730 (55cps LQ)	**NEW LOW PRICE**
NEC 8850 (Fast LQ from the people setting standards)	**CALL**
C.ITOH A10 (New letter quality)	**CALL**
C.ITOH STARWRITER (40cps LQ)	**$1025**
C.ITOH PRINTMASTER (55cps LQ)	**$1325**
QUME LETTER PRO 20 (New, nice)	**CALL**
QUME SPRINT 1140 (40cps LQ)	**CALL**
QUME SPRINT 1155 (55cps LQ)	**CALL**
BROTHER HR-15 (13cps LQ, 10")	**$395**
BROTHER HR-25 (23cps LQ, 15")	**$675**
BROTHER HR-35 (32cps LQ, 15")	**$895**
COMREX, DYNAX PRINTERS	**CALL**

CALL FOR ADD-ON TRACTORS & CUT FEEDER SHEETS

Miscellaneous:

ORCHID PC TURBO (80186 coprocessor-runs at 8MHz)	**CALL**
INTEL 8087 (High speed math coprocessor)	**$169**
KEYTRONIC 5151 KEYBOARD (Sep. cursor keys)	**$199**
MOUSE SYSTEMS (Optical mouse, runs LOTUS)	**$139**
MICROSOFT SERIAL OR BUS MOUSE (w/software)	**$139**
ISOBAR SURGE PROTECTORS (4 & 8 plug)	**$49/$69**
POWER BACK-UP (200 & 425 watts)	**$269/$499**
MICROFAZER (8-128K print buffer)	from **$139**
BRET SALTER'S new debug board w/software	**CALL**

Verbatim Diskettes:

SS/DD Box	**$24**- Case	**$199**
DS/DD Box	**$29**-Case	**$249**

Disk Drives For Less:

TANDON TM 100-2 $179

HALF HEIGHTS ea $149

Hard Disk Drives:

PEACHTREE PERIPHERALS 10MB internal & external	**CALL**
EVEREX 10MB internal	**CALL**
MAYNARD 10MB internal	**CALL**
MAYNARD 30MB internal	**$2195**
MITSUBISHI (10MB & 25MB w/tape)	**CALL**
SYSGEN 10MB HARD DISK (w/tape back up)	**$2395**
SYSGEN 20MB HARD DISK (w/tape back up)	**$2895**
SYSGEN IMAGE 10 minute XT tape back up	**$795**

CALL FOR TECMAR, DAVONG, AND TALLGRASS PRICES

Multifunction Boards:

EXPANDED QUADBOARD (64K-384K,S,P,G,C/C,bracket)	**$269/459**
AST 6-PAK (64-384K,S,P,C/C,opt G)	**$269/459**
AST MEGAPLUS (64-512K*,S,C/C,opt S,P,G,K)	from **$269**
AST I/O PLUS (S,C/C,opt S,P,G)	from **$139**
ORCHID BLOSSOM (64-384K S,P,C/C, **opt PC Net)**	from **$249**
TECMAR CAPTAIN (64-384K,S,P,C/C)	from **$259**
BABY BLUE II (64-256K,Z80B,2S,P,C/C)	from **$429**
PERSYST Time Spectrum (64-384K,S,P,c/c, 2 yr. wrty)	**$279**
PROFIT RAM ELITE & PLUS (64-512K,2S or S&P,C/C)	**CALL**
MAYNARD SANDSTAR MODULAR BOARDS	**CALL**

Modems:

HAYES 300 baud external	**$209**
HAYES 1200 (300 or 1200 baud ext)	**$469**
HAYES 1200B (300 or 1200 baud int w/soft)	**$399**
HAYES Compatibles	**CALL**
SIGNALMAN MARK 12 (1200 baud at 300 price)	**$259**
VENTEL HALF CARD	**BEST PRICE**

Display Cards:

EVEREX GRAPHIC EDGE (Simultaneous color & mono. w/ports)	**$399**
TSENG UltraPAK (132 mono, S, P, C/C, opt RAM, FDC, color)	**$439**
PARADISE MODULAR GRAPHICS CARD (Color/graphics in mono with modular ports options!)	**from $339**
PERSYST BoB (finally clear text on a color monitor)	**CALL**
STB GRAPHIX PLUS II (Mono, color, par)	**$369**
PROFIT MULTIGRAPH (Mono, color, opt par)	**$369**
TECMAR GRAPHICS MASTER (640x400 + mono)	**$489**
QUAD COLOR I (Upgrades to hi/res w/QuadcolorII)	**$199**
HERCULES COLOR CARD (New from old faithful)	**$189**
AST MonoGraphPlus (LOTUS mono, serial, parallel, clock)	**$399**
PLANTRONICS Colorplus (Hi/res w/color magic)	**$379**

IBM PCS

WE OFFER THE BEST:

• PRICE • SERVICE
• STOCK • SUPPORT

CALL FOR A QUOTE

AT

ADD-ONS & UPGRADES

HARD DISKS

• INTERNAL/LOW POWER
• EXTERNAL/MASS STORAGE
• ARCHIVE TAPE BACK-UP
• REMOVABLE MEDIA

Inquiry 284

BUDGET HERO



Call for an IBM PC system custom enhanced to meet all your business needs.

NEW IBM PRICES!!

IBM PC w/256K, 2 360K drives, controller, Monochrome/ Printer adapter, Amdek 310A **$2195**

IBM PC w/256K, 2 360K drives, con troller, Color/Graphics adapter, HX-12 color monitor **$2495**

IBM PC w/256K, 2 ½ ht. 360K drives, controller, 10MB hard disk w/auto boot **$2795**

(These systems are brand new, fully tested and burned in, fully warranteed for 90 days **AND ARE ALWAYS IN STOCK!)**

Monitors:

AMDEK COLOR 710(No glare, no flicker ultra hi/res) ... **$579**
AMDEK COLOR 700 (New ultra hi/res RGB) **$495**
AMDEK COLOR 600 (New hi/res RGB w/audio) **$429**
AMDEK 300 A and G (Amber or green) ..... **$149/$139**
AMDEK COLOR 500, 400, 300 (New hi/res RGB) ..... **CALL**
AMDEK 310A (Amber, dark non-glare tube) **$169**
PGS SR-12 (690x480 non-interlaced) **$599**
PGS HX-12 (690x480 interlaced) **$479**
PGS MAX-12 (720x350 mono) **$189**
WYSE 50,75,100 TERMINALS(Program funct. keys) **CALL**
TAXAN, NEC, ZENITH MONITORS ..... **CALL**



Software:

SYMPHONY (New from LOTUS) ..... **BEST PRICE-CALL**
FRAMEWORK (New from ASHTON-TATE) ... **BEST PRICE**
MULTIMATE (Emulates WANG dedicated WP) **$279**
SAMNA WORD III ("Ultra-WANG") **$295**
WORDSTAR PRO-PAK (WS/CS/MM/SI/Tutor) **$279**
MICROSOFT WORD w/MOUSE (4th generation WP) **$289**
VOLKSWRITER DELUXE w/Textmerge **$179**
BANK STREET WRITER **$59**
EASYWRITER II SYSTEM (-writer,-speller,-mailer) ... **CALL**
SUPERCALC 3 (Better graphs than LOTUS) ... **BEST PRICE**
PFS Write, File and Graph .... each **$99.Report** **$79**
OPEN ACCESS (Proven Integrated Package) ..... **CALL**
dBASE II & III (From Ashton-Tate) ..... **$299/$375**
KNOWLEDGEMAN (Version 1.06) **$299**
RBASE 4000 & 6000(Use w/CLOUT, REPORT WRITER)**CALL**
POWER BASE (Relational, hierarchical) **$279**
CIP (New and fantastic!) ..... **CALL**
DAYFLO (Enhance with REPORTFLO) ..... **CALL**
OZ (from Fox & Geller) ..... **CALL**
NUTSHELL by Leading Edge ..... **CALL**
LIFEBOAT LATTICE C COMPILER (w/8087 support) ... **$289**
LIFEBOAT LATTICE C-FOOD SMORGASBORG ..... **CALL**
MICROSOFT C,BASIC,FORTRAN,PASCAL,COBOL ... **CALL**
BORLAND TURBO PASCAL & TOOLBOX ..... **CALL**
DIGITAL RESEARCH (All products) ..... **CALL**
DOW JONES (All products) ..... **CALL**
IUS A/R, A/P, G/L **$299**
OPEN SYSTEMS ACCOUNTING MODULES ... **BEST PRICE**
STATE OF THE ART (G/L,A/R,A/P,INV,PR) ... **BEST PRICE**
BPI GENERAL ACCOUNTING AND MODULES ..... **CALL**
DOLLARS AND SENSE by Monogram **$119**
MANAGING YOUR MONEY by Tobias/Meca **$129**
HARVARD PROJECT MANAGER ..... **BEST PRICE**
TAX PREPARATION PACKAGES ..... **CALL FOR PRICE**
DECISION RESOURCES CHART MASTER **$259**
BPS BUSINESS GRAPHICS **$259**
Z-SOFT PC PAINTBRUSH w/FRIEZE GRAPHICS **$99**
PROKEY VERSION 3.0 by Rosesoft **$95**
SET-FX for your EPSON **$45**
NORTON UTILITIES **$59**
COPY II PC by CENTRAL POINT **$35**
COPYWRITE by Quaid (Copies all IBM software) **$45**
COMPUSERVE STARTER KIT **$35**
SIDEWAYS by FUNK SOFTWARE **$49**
CROSSTALK XVI by MICROSOFT **$109**
HAYES SMART COM II **$95**
TRACE 86 by Morgan (Assembly language debug) .. **CALL**
FLIGHT SIMULATOR **$39**

Chips (Always in stock):

64K RAM CHIP MEMORY UPGRADE (set of 9) full 90 day warranty **$39**

WE ARE CHIP BROKERS, ASK FOR QUANTITY PRICES

PROGRESSIVE MICRO DISTRIBUTORS

FOR ORDERS ONLY
1-800-446-7995
for further information and technical support
1-404-446-7995
HOURS: 9AM to 9PM EST
(Sat/Sun-12PM to 5PM EST)

7000 Peachtree Industrial Blvd.
Norcross, Georgia 30071

All prices are subject to change.
IBM is a registered trademark of International Business Machines.

NO SURCHARGE FOR MC/VISA

NETWORKS
FOR YOUR
IBM PC
SHARE FILES
SHARE DEVICES
CALL FOR DETAILS

COMMUNICATE
WITH YOUR CORPORATE
MAINFRAME
- DOWNLOAD DATA
- TERMINAL EMULATION

WE CARRY THE BEST

CHIPS
64K • 256K
8087 • 80287
MEMORY UPGRADES
QUANTITY DISCOUNTS
SOUTH'S LARGEST SUPPLY

Computer Components Unlimited
We Publish Our LOWEST Possible PRICE
No Hidden Costs!!

NEW REDUCED PRICES

Okidata 92P
★ 160 cps
★ Correspondence Quality
★ FREE Plug 'n Play
$359

64K Memory Upgrade
★ 9 - 4164 ★ 200 ns
★ Not Micron's ★ 1 yr. war.
$27.95 a set

Teac 55B Disk Drive
★ Half Height, 320K
★ IBM Compat. ★ 1 yr. war.
$124

IBM PC System
★ PC w/256K Memory
★ Two, 320K Disk Drives
★ Video Graphics Card & Hi-Res Amber Monitor
★ Dos 3.0 & Operation Guide
★ Complete, Ready to Go
$1799

Ast Sixpac +
★ 64K exp. to 384K
★ Par. & Ser. Ports
★ With Clock & Software
$248

Tandon TM 100-2
★ The IBM Drive
★ 320K Dbl. Side/Dbl. Density
$139

Apple IIc
★ With Monitor & Stand
$999

5¼" Diskettes
★ Sgl. Side/Dbl. Density
★ Fully Apple Compatible
★ With Reinforced Hub
★ 1 year warranty
★ Not Bulk Packed
$14 per box
100 for $130

CCU YOUR LARGEST DISK DRIVE SUPPLIER

Apple Compatible Drives

	QUANTITY 1	2	10
Micro Sci			
A-2, 35 Track	$175	$169	$159
Controller	65	60	50
Rana Systems			
Elite I	$210	$205	$200
Elite II, Dbl. Head	335	330	325
Elite III, Quad Density	395	445	435
Controller Controls 4 Drives	75	70	70
Half Height			
FD525A Fully Apple com.	$140	$130	$120
Sigma Technology			
Full HT Apple	$160	$150	$140

5¼" Disk Drives

	QUANTITY 1	2	10
Teac			
FD55A, 160K	$160	$150	$140
FD55B, 360K	124	124	124
FD55F, Quad Density	159	150	140
All Teac's are Half Heights			
Tandon			
TM100-1, 160K	$150	$140	$130
TM100-2, 360K	139	137	135
TM101-4, Quad Density	280	270	260
TM55-2, 360K ½ Height	195	190	185
MPI			
B-52, 360K PC Compatible	$100	$ 95	$ 90
Shugart			
SA400, 160K	$190	$180	$170
SA455, 360K ½ Height	150	140	130
SA465, Quad Den. ½ Height	230	220	210
Mitsubishi			
4851, ½ Height	$159	$149	$139
4853, Quad Den. ½ Height	169	159	140
Control Data Corp.			
CDC 9409, 360K	$190	$180	$170

8" Disk Drives

	QUANTITY 1	2	10
Siemens			
FDD-100-8	$129	$120	$111
FDD-200-8	180	170	160
Shugart			
801R, Sgl./Dbl.	$160	$150	$140
851R, Dbl./Dbl.	480	470	460
Tandon			
TM848-1E, Sgl./Dbl. ½ Ht.	$240	$230	$220
TM848-2E, Dbl./Dbl. ½ Ht.	370	360	350
Mitsubishi			
M2894-63, Dbl./Dbl.	$400	$390	$380
M2896-63, Dbl./Dbl. ½ Ht.	400	390	380

5¼" & 8" Power Supply & Cabinets

	QUANTITY 1	2	10
PC Products 5¼"			
Single Cabinet w/pwr	$ 70	$ 60	$ 50
Dual Thinline Cab w/pwr	80	70	60
Dual Cabinet & Power	80	70	60
All have 6 month Warranty			
PC Products 8"			
Sgl. Cabinet w/pwr & fan	$220	$210	$200
Dual w/pwr for 2 thinlines	230	220	210
Dual w/pwr & fan	270	260	250

Customer Service Hours:
10 a.m. - 4 p.m. Mon.-Fri.
John Aurentz
(213) 618-0487

Mail Order Hours:
7 a.m. - 7 p.m. Mon.-Fri.
10 a.m. - 3 p.m. Sat.
(800) 847-1718 (Outside California)
(213) 618-0477 (Inside California)

Retail Hours:
10 a.m. - 7 p.m. Mon.-Fri.
10 a.m. - 5 p.m. Sat.

Apple is a Trademark of Apple Computer, Inc.

IBM is a Trademark of International Business Machines.

Inquiry 61

CALL (800) 847-1718
WE STOCK WHAT WE SELL!!

COMPUTER SYSTEMS

Apple

IIE cpu	$ 690
Macintosh	1895
IIc Portable	899

Compaq

Portable (PC Compatible) 2, 360K Drives
256K of Memory $2150
Call for all new Compaq's

Kaypro

Kaypro II	Call
Kaypro 4	1644
Kaypro 4 + 88	2095
Kaypro 10	2295
Kaypro IIX	1389

IBM

PC 64K, No Drives	$1149
PC 64K, 1 Drive	1324
PC 64K, 2 Drives	1489
XT w/10 Meg, 256K	3495
Additional Memory 64K	29
AT Standard Config.	3595
AT w/20 meg	5295

Sanyo

MBC 550-2	$ 799
MBC 555-2	1089
Optional Serial Port	69
Optional 360K Drive	159

Tava

PC Compatible w/Monitor $1540

IBM ADD ON'S

Ast Research

Six Pack +	$ 249
Mega +	265

Hercules

Color Card	$ 185
Graphics Card	329

Hard Disk

10 Meg. External w/pwr. $1195

IBM

Monochrome Adapter	$ 229
Color Card	239

Paradise Systems

Multi-display Card	$ 329
New Modular Card	345
Module A	88
Module B	240

Plantronics

PC + w/Software $ 389

Quadram

Quad Color Card $ 199

64K Upgrade

64K of Memory $27.95

STB

Graphics Plus II $ 369

PC Products

PC Peacock $ 215

Ports

Parallel	$ 79
Serial	79

CCU

Color Graphics Card $ 179

APPLE ADD ON'S

ALS

Z Engine	$ 119
CPM 3.0 Card	249

Astar

RF Modulator	$ 15
Fan w/Surge	34

CCU

16K Mem. Card 1 yr war. $ 49

Hayes

Joystick $ 44

Kraft

Joystick $ 44

Macro

Joystick $ 29

Micro Max

Viewmax 80, 80 col. card	$ 139
Viewmax 80E (F for IIE) 64K	129

Micro Soft

16K Card	$ 69
Premium Soft Card IIE	369
Multiplan	189
Soft Card (Z80)	239

Micro Tek

Serial Interface $ 89

TG

Joystick	$ 39
Select-A-Port	31
Paddles	34

MONITORS

Amdek — New Monitors

Color 300 w/speaker	$ 249
Color 600 RGB	469
Color 700 RGB (720 x 480)	589
Color 500 compos. or RGB (560 x 240)	399

Amdek

300G, Green Composite	$ 129
300A, Amber Composite	138
310A, Monochrome Amber	168

Taxan

12" Amber or Green Composite	$ 99
425 "New" RGB Color & Green	499

Princton Graphics

PGS MAX12, Monochrome (800 x 350)	$ 165
PGS HX12, RGB (690 x 240)	449
PGS SR-12, (690 x 480)	649
Sean Doubler	199

IBM

Monochrome Display	$ 239
Color Display	589

Zenith

ZVM121, Amber 40/80 col. switch	$ 94
ZVM122, Green 40/80 col. switch	94

MODEMS

Hayes

Micro Modem IIE	$ 229
300 Smart Modem	199
1200 Smart Modem	458
1200B	374
2400 Baud "New"	Call

Anchor Automation

Mark VI, 300 Baud Internal	$ 99
Mark VII 300 Baud External	458
Mark XII, 1200 Baud	228

Prometheus

Promodem 1200 External $ 329

PRINTERS

Epson

RX-80 (120 cps)	All New
RX-80FT	Version
RX-100 +	
FX-80 +	Save
FX-100 +	At Least
LQ1500	$150

We are an Authorized Dealer

Okidata

OKI 82A, 120 cps	$ 295
OKI 92, 160 cps w/correspondence	359
OKI 93, 15" car. w/correspondence	589
OKI 84, 200 cps	669

FREE Plug 'n Play Roms w/92, 93 & 84

JUKI

6100, 18 cps Ltr. Quality	$ 394
6300, 40 cps "New" w/3K Buffer Letter Quality	875

Brother Dist. by Dynax

HR15, 12 cps	$ 375
HR25, 25 cps	659
HR35, 36 cps	949

Panasonic

1091, 120 cps w/tractor $ 289

5¼" DISKETTES

CCU

Sgl/Dbl reinforced hub	$16	100 for 140
Dbl/Dbl reinforced hub	19	100 for 170

Not Bulk Packed

Dysan

Sgl/Dbl	$33	100 for 300
Dbl/Dbl	39	100 for 370

Fuji

Sgl/Dbl	$19	100 for 180
Dbl/Dbl	25	100 for 230

Verbatim

Sgl/Dbl	$26	100 for 240
Dbl/Dbl	36	100 for 340

8" DISKETTES

Dysan

Sgl/Sgl	$34	100 for 320
Dbl/Dbl	53	100 for 480

Verbatim

Sgl/Sgl	$30	100 for 280
Dbl/Dbl	40	100 for 360

PRINTER INTERFACES

Fourth Dimension

Card & Cable $ 49

Microtek

Dumpling GX (Grappler Compatible)	$ 89
Dumpling GX exp to 64K	149
Dumpling GX 16K w/16K exp to 64K	169
for each additional 16K	15

Okidata Options

Tractor for 82 & 92	$ 59
Serial Interface	99

Orange Micro

Grappler +	$ 109
Grappler + w/16K	179

Star or Epson

Epson Serial Interface	$ 119
Star Serial Interface	59

Computer Components Unlimited

A California Corporation

RETAIL STORE:
11976 Aviation Blvd.
Inglewood, CA 90304

MAIL ORDER:
P.O. Box 1936
Hawthorne, CA 90250

No Surcharge for Credit Cards
All Prices Reflect a Cash, Pre-Paid Discount
This Ad Supersedes All Others

Sales Desk
(800) 847-1718 Outside California
(213) 618-0477 Inside California

Customer Service & Technical
(213) 618-0487

All merchandise new. We accept MC, Visa, Wire Transfer, COD Call, Certified Check, P.O.'s from qualified firms. APO accepted. Shipping: Minimum $4.50 first 5 pounds. Tax: California Res. Only add 6½% sales tax. All returns subject to 15% restocking charge. Advertised prices for Mail Order only. Retail prices slightly higher.
Prices Subject to Change.

Inquiry 61

NOW INCLUDES TINY BASIC

FORTH AVAILABLE



SIBEC 51

8051/52 DEVELOPMENT BOARD

8051-Based Single-Board Computer with Monitor/Debugger

- 4 28-pin byte-wide sockets; monitor will program EEPROMS.
- Perfect for System Development and Educational Applications

MasterCard VISA

$335

Binary Technology

P.O. BOX A-59 • HANOVER, NH 03755 • 603/643-2881

Inquiry 40

Uniforth™

Don't think of **UNIFORTH** as just another programming language!
It's an *integrated programming environment.*

Once you enter this FORTH-79 standard language, you never have to leave. All operating system functions - file commands, directories, terminal I/O - are available from the keyboard. Each system includes a *full-screen editor, assembler, interpreter, compiler* and *debugger*. Use **UNIFORTH** as a calculator or as a controlling program. Add our optional *telecommunications, graphics, data base management* and *word processing* modules, and **UNIFORTH** will outperform other FORTH systems hands down!

UNIFORTH is a *solid, proven* product. Our users include many of the Fortune 500 companies, as well as hundreds of software developers, engineering laboratories, universities and individuals. **UNIFORTH** is strongest in process control, automation and interactive environments, but has been used for a run-time PASCAL compiler, a scientific word processor, teaching graphics at a community college, and designing games.

The *User's Manual* is not only *complete* and *thorough*, it's also *understandable*. It guides you through learning FORTH to writing and debugging your first program. The *Programmer's Manual* gives you insight into the inner workings of FORTH, programming conventions, and helpful utilities. Both manuals are *indexed* and contain numerous examples and working programs.

Why take a chance?
Order the best and you won't be disappointed!

Only **UNIFORTH** offers *free corrections* and an *unconditional, 30-day money-back guarantee!*

UNIFORTH is available for most personal computers and DEC minicomputers. Our prices are competitive, with many systems selling for *under $100*. Call or write for our free 20-page catalog.

UNIFIED SOFTWARE SYSTEMS
P.O. Box 2644, New Carrollton, MD 20784
(301) 552-9590

Inquiry 355

HAMMER

Attention:
—SOFTWARE DEVELOPERS—

We are interested in receiving your completed package and business plan. Hammer Computer Systems, Inc. is in the software publishing business. Please send inquiries and complete portfolio to: Thomas A. Horvath, Vice President of Sales and Marketing. Hammer Computer Systems, Inc., 700 Larkspur Landing Circle/Suite 285, Larkspur, CA 94939 415/461-7633.

Inquiry 156

I.B.M. Compatible

Case $100.00
KeyBoard $149.00
Motherboard without BIOS $280.00
Power Supply 130 Watt $150.00
Multi Function Card $170.00
Color Graphic Board $185.00
Floppy Disk Control Card $160.00
CP-80 Printer $169.00
PROM 8200 (FAST UNIVERSAL TYPE EPROM & PROM PROGRAMMER) Call
EPROM: 2716, 2732, 2732A, 2764, 27128, 27256, 2516, 2532, 2564
Prom: ANY KIND

Apple Compatible

IC Tester Card $125.00
Z-80 Card $40.00
80 Column Card $50.00
Disk Drive $149.00 (APPLE OR I.B.M.)
14 inch Monitor $89.00

ALL PHONES
CALL NOW **(312) 280-7610**

DIST. WANTED
CUSTOM PRODUCTS

HOFFMAN INT'L
600 N McClurg CT. STE. 309A
Chicago, Illinois 60611

Inquiry 162

C Preprocessor

If you have ever found yourself wishing that C had a more sophisticated preprocessor, you will appreciate this stand-alone preprocessor from Hyperon Software.

- ☐ *Supports Harbison & Steele Preprocessor*
- ☐ *Preprocessor Variables & Expressions*
- ☐ *#While & #Do Loops*
- ☐ *Full Macros*
- ☐ *One Pass*
- ☐ *C Source & Documentation Provided*

Designed for portability. Presently PCDOS diskettes are available; please inquire about other formats.

Price: $39.95 (California residents add 6%)

Hyperon Software
PO Box 3349
Costa Mesa CA 92628



Inquiry 267

IBM PC / VT100

EM100
for IBM PC, XT, AT
APRICOT and VICTOR 9000

VT102 emulation, English setup menu, 110-9600 BAUD, ASCII file transfer, Modem 7 binary transfer, 132 columns, soft keys, and more! *Optional Tektronix 4010 emulation.*

Multicopy discounts

Diversified Computer Systems, Inc.
100 Arapahoe, Boulder, CO 80302
(303) 447-9251

Dealer inquiries invited.

Trademarks: VT100-Digital Equipment, IBM PC, XT-IBM Corp., VICTOR 9000-Victor Technologies, COMPAQ-COMPAQ Computers, Inc.

Inquiry 115

SUPER "K" BIG BOARD

"It's So Fast It Screams"

* Z80H 80Mhz Processor
* Z80A I/O Processor
* 12 RS 232c Serial Ports
* 2 Parallel Ports
* 360K Bytes RAM
* Hard Disk Controller
* Floppy Disk Controller (Up to 4 Drives/Contrlr)
* DMA
* Cached Directory
* Seven (7) Users
* Modified Superfast M/PM Bios
* 15" x 15 1/2"
* Assembled & Tested

$2,495.00

KASCO Systems
11926 Warfield
San Antonio, Tx 78216
Telephone 512-342-5755

Inquiry 193

3M Diskettes
Lifetime Warranty

Think you're getting the best price on 3M Diskettes?
You're right . . . BUT ONLY IF . . .
You're buying from
NORTH HILLS CORP.

We will beat any nationally advertised price* or give you a 15 disk library case **FREE!**

Call us last—TOLL FREE—for our best shot every time.

1-800-328-3472

Formatted and hard sectored disks in stock.

Dealer inquiries invited. COD's and charge cards accepted. All orders shipped from stock within 24 hours. Why wait 10 days to be shipped?

North Hills Corporation
3564 Rolling View Dr.
White Bear Lake, MN 55110
MN Call Collect 1-612-770-0485

*verifiable; same product, same quantities

Inquiry 260

AMERICA'S NO. 1

IBM® Systems Specialists

WE CUSTOMIZE IBM PC SYSTEMS

IBM PC $1699
256K, two disk drives 360K each,
Drive Controller and Keyboard



IBMPC w/10MB $2399
256K, one floppy Drive, Keyboard
10 MB Hard Disk with Controller
BOOTS FROM HARD DISK

ALL SYSTEMS ARE CONFIGURED AND TESTED AT NO EXTRA CHARGE

IBMPCw/30MB $3499
256K, one floppy Drive, Keyboard
30 MB Hard Disk with Controller
and Booster Power Supply
BOOTS FROM HARD DISK

★ **PRICE WAR** ★ CALL US **LAST** WITH YOUR BEST QUOTES ★

PRINTERS

EPSON RX-80 $259 FX-80 $429; RX-80FT $299 FX-100 $629
LQ-1500 Parallel $1,149 Serial $1199
LQ-1500 Tractor $50 Cutsheet feeder $399

OKIDATA INCLUDES PLUG & PLAY
92P $399
93P $619
84P $749

JUKI 6100 Ltr Quality, 18 CPS, 13" wide $399
Tractor $129

TOSHIBA 1351 $1299
Tractor $169 Cut Sheet Feeder $799

DYNAX DX-15 $369
Keyboard $149 Tractor $99 Sheet Feeder $199

BROTHER HR-25 $619 HR-35 $899
Tractor $119 Cut Sheet Feeder $199

QUME SPRINT
1140 $1299
1155 $1499
With IBM Interface Module

NEC SPINWRITER
2050 $799
3550 $1499
8550 $1899

NEC PINWRITER
P2 $699
P3 $899

MONITORS

PGS
MAX-12 Amber—Monochrome $179
HX-12—Hi-Res Color $449
SR-12—Super Hi-Res Color $649
Scan Doubler CALL

TAXAN 440 Color - Super Hi Res $599
122A(M) $169 121G(M) $159 116A(C) $149

AMDEK
300A (Composite) $159 300G $139
310A (Mono) $179

MODEMS

MICROCOM ERA 2 $359
PC Internal 1200 Baud w/software, 4 Yr. Warranty

HAYES SMARTMODEM 1200 Standalone $469; 1200B w/software $389

QUBIE Standalone $329 Internal $299

POPCOM Internal or Standalone CALL

PROMETHEUS
PROMODEM 1200 Standalone $399

P.O. & FOREIGN DEALERS
Call, write or telex for details

HARD DRIVES

TALL GRASS TECHNOLOGY
20 MB w/20 MB Backup $2,599
35 MB w/45 MB Backup $3,999
70 MB w/60 MB Backup $5,999
Controller Card $140 Cartridge $40

QUBIE 10MB $888

EVEREX 10MB $888

MAYNARD 10MB/30MB
10MB/WS-1 $888 10MB/WS-2 $1,029
30MB/WS1A $1999 30MB/WS-2A $2,099
WS-1 Gemini $1049 WS-2 Gemini $1149
"The Gemini" includes 10MB Hard Disk & Half Ht. Floppy

FLOPPY DRIVES

TEAC HALF HEIGHT 55B-DSDD $129

CDC Full Ht. - DSDD $199

TANDON 100-2 $149
Full Ht. DSDD

★ SUPER SPECIALS ★

64K RAM Set of 9 chips $36

HAYES SMARTMODEM 1200 Standalone $469; 1200B w/Software $389

8087 CHIP $159

JUKI 6100 $399

MAYNARD 10MB/WS-2 $1,029

IBM PC Keyboard (original) CALL

OKIDATA INCLUDES PLUG & PLAY
92P $399
93P $619
84P $749

BROTHER
HR-25 (23CPS) $619
HR-35 (36CPS) $899

KEYTRONIC
Deluxe Keyboard KB5151 $179

ORCHID TECHNOLOGY
Blossom 64-K (to 384K) $249
Turbo 186 CALL

MasterCard VISA AMERICAN EXPRESS
NO SURCHARGE ON COD, VISA or MC
AMEX 5%

NETWORKING

ORCHID TECHNOLOGY
PC Net PLUS Starter Kit $899
PC netBlossom, PC turbo, PC netPlusRam CALL

IRMALINE
CALL FOR YOUR BEST PRICES

MULTI-DISPLAY CARDS

PERSYST
Mono OR Color $199
BOB Color CALL

AST MonoGraph Plus w/clock & PP $369
Serial Port Option $30

EVEREX Graphics Edge CALL

PC PEACOCK $219

TECMAR Graphics Master CALL

HERCULES
Mono Graphics $329
Color Graphics $199

NEW **STB** Graphix Plus II $349

VUTEK Color with Parallel & Serial $249

PARADISE Multi-display Card $299
NEW Modular Card CALL

MULTI-FUNCTION CARDS

ORCHID TECHNOLOGY
Blossom 64K (to 384K) $249
PC net/upgrades CALL

NEW **QUADBOARD** 0-K (to 384K) $219

AST SIX PAK with 64K (to 384K) $249

AST MEGA PLUS with 64K (to 512K) $249

MISC. ADD ONS

8087 CHIP $159

CABLE Parallel $20 Serial $25
Keyboard Extension, 6 ft. $10

PLATINUM DISKETTES $32
Box of 10

VERBATIM Datalife DSDD
Box of 10 $29

COMPUTER ACCESSORIES POWER DIRECTOR P2 $109 P12 $149

STANDBY POWER SUPPLY
200 WATTS.....$279
300 WATTS.....$379
Surge Protection, up to 30 minutes Standby Power

WILL CALL: Please call first for workorder number.

COMPUMAIL 805-498-6635

3541 OLD CONEJO ROAD, SUITE 102, THOUSAND OAKS, CA 91320 **TELEX 888522** Ad #192

NEW!!

MEGA-CASE™

NEW!!

IDEAL FOR OEM MANUFACTURERS, UNIVERSITIES, RESEARCH LABS ETC.

THE ULTIMATE PC COMPATIBLE ENCLOSURE

IDEAL FOR MEGA-BOARD™ XT OR ANY IBM-PC PC-XT COMPATIBLE BOARDS

OEM AND DEALER QUANTITY DISCOUNTS AVAILABLE

EASY ACCESS!!
FLIP-TOP-CASE™ OPENS FOR EASY ACCESS TO INSIDE!!

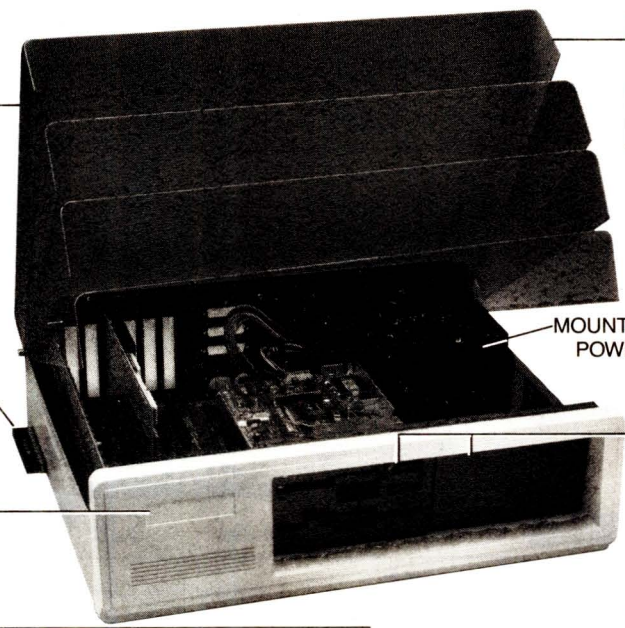

EXCLUSIVE FLIP-TOP-CASE™
Overcomes Problems With PC Case

Bus Expansion Slot
Allows External Access To PC Bus

MOUNTS STANDARD POWER SUPPLY

Mounts Standard Half or Full Height Floppy Disk or Hard Disk Drives

Blank Label Inset For Your Company Or University Name Here

Rugged Heavy Gauge Steel Construction

ONLY $99.95 COMPLETE

ADVANCED KEYBOARD

FEATURES:
- Horizontal Return Key
- Caps Lock and Num. Lock Indicators
- Enter Key for Numeric Keypad

Full PC Compatibility

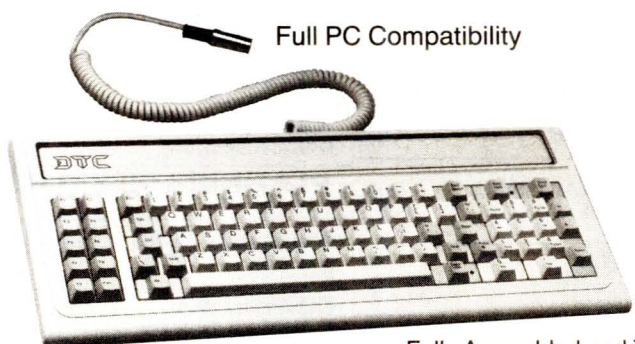

ONLY $149.95

Fully Assembled and Tested with One Year Limited Warranty

DTC™ DISPLAY TELECOMMUNICATIONS CORPORATION

4100 SPRING VALLEY ROAD
SUITE 400
DALLAS, TX 75234
(214) 991-1644

TERMS: We accept cash, checks, money orders, or purchase orders from qualified firms and institutions. Prices and availability subject to change without notice. Shipping and handling charges via UPS ground 50¢/lb. UPS air $1.00/lb. Minimum charge $3.00

*IBM and IBM PC are trademarks of International Business Machines

©1984 Display Telecommunications Corporation

MEGA-BOARD™-XT

#1 CHOICE OF MAJOR OEM MANUFACTURERS, UNIVERSITIES, RESEARCH LABS ETC.

A THOROUGHLY FIELD PROVEN DESIGN.
HIGH VOLUME PRODUCTION ENGINEERED.

- ***FULL IBM PC-XT* COMPATIBILITY!***
- ***FULL MEGA-BYTE RAM CAPACITY ON MOTHERBOARD!***

THOUSANDS SOLD WORLD WIDE!

DEALERS AND OEM MANUFACTURERS QUANTITY DISCOUNTS AVAILABLE

Standard Key-board Interface
(Full PC compatible)

Hardware Reset
(Overcomes reset flaw in PC)

Power Connector
(Full IBM* pinout compatible)

8088 Processor
(Same as PC)

8087 Numeric Processor
(Same as PC)

Peripheral Support Circuits
(Same as PC)

Configuration Switches
(Same as PC)

Speaker/Audio Port
(Same as PC)

Wire Wrap Area
To facilitate special custom applications!

Eight Compatible I/O Interface Connectors
(Full PC compatible) (compatible with all IBM-PC* plug-in cards)

Special J1 Interface
(Allows horizontal mounting of compatible expansion cards for easy bus expansion and custom configuring) (Board has 62 pin gold plated compatible connector)

Extended ROM Capability
(Runs all compatible PC ROMS) (Jumper programmable to accommodate all popular 8K, 16K, 32K and 64K ROM chips and NEW EE ROMS! VPP power pin available for EP ROM burning!) (External VPP voltage required)

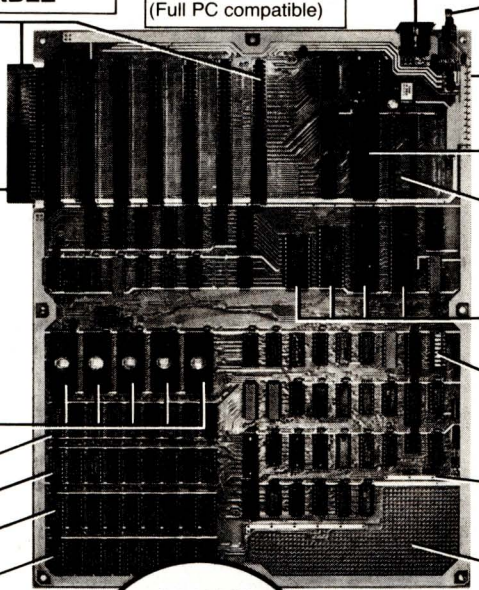

ONLY!
$99.95
Evaluation Board Kit

Mega-Board™ **Evaluation Board Kit!**
(Blank board with full assembly instructions and parts list.)

Includes highest quality PC board with gold plating, silk screen, solder mask

Board Size 10.5 inch X 13.5 inch

Full Mega-Byte Ram Capacity! On board!
(With parity)
☐ 256K Bytes using 64K chips
☐ 1 Mega Bytes using 256K chips

☐ MEGA-BOARD™ — XT
- ☐ BARE BOARD KIT . . . . . $ 99.95
- ☐ ASSEMBLED AND TESTED SOCKET KIT . . . . . $199.95 (LESS IC'S) (FULLY SOCKETED)
- ☐ ASSEMBLED AND TESTED — COMPLETE . . . . . $499.95 (INCLUDES USERS MANUAL AND MEGA-BIOS ROM)

☐ USERS MANUAL WITH THEORY OF OPERATION, SCHEMATICS, BLOCK DIAGRAM, APPLICATION NOTES . . . . . $ 19.95

☐ MEGA-BIOS™ ROM (2764) FULLY XT COMPATIBLE, MS-DOS, PC DOS . . . . . $ 29.95

☐ HARD TO GET PARTS . . . . . CALL

FREE OFFER

FREE! Displaytel™ Exclusive. Our Commitment to Microcomputer Education!

FREE Intel 8088 Data Book with each Mega-Board™ Order!

ORDER NOW!!! Fast, friendly service

CALL 214-991-1644

AMERICAN EXPRESS · MasterCard · VISA · EURO CARD

100% SATISFACTION GUARANTEE

Immediate shipment! Most instock items shipped same or next day!

10 Day money back guarantee if not completely satisfied!

DTC™ DISPLAY TELECOMMUNICATIONS CORPORATION

4100 SPRING VALLEY ROAD
SUITE 400
DALLAS, TX 75234
(214) 991-1644

TERMS: We accept cash, checks, money orders, or purchase orders from qualified firms and institutions. Prices and availability subject to change without notice. Shipping and handling charges via UPS ground 50¢/lb. UPS air $1.00/lb. Minimum charge $3.00

*IBM and IBM PC are trademarks of International Business Machines

©1984 Display Telecommunications Corporation

SL-MICRO

STATISTICAL LANGUAGE for MICROCOMPUTERS

features

FREQUENCIES — FULL LABELING
CROSSTABS — TRANSFORMATIONS
PEARSON CORR — * DATA EDITOR
REGRESSION — CONDESCRIPTIVE
* ANOVA — * BREAKDOWN

* = new

Only $250. Manual $15
Available for IBM PC, CP/M, MS-DOS or CP/M-86.

QSC BOX 23056
LANSING, MI 48909
PHONE (517) 641-4428

Inquiry 295

STD BUS 64K SINGLE BOARD COMPUTER/CONTROLLER



FEATURES

- *8085A CPU
- *64K Dynamic RAM
- *4K Monitor EPROM with Disassembler
- *256 Byte Static RAM
- *Parallel & Serial I/O -2 8/Bit Prog Ports -1 6/Bit Prog Port -RS232 Serial Port
- *6.144 MHz Crystal
- *Interfaces to CP/M Computers for Program Development
- *Automatic Baud Rate
- *5 Interrupts
- *14 Bit Prog Counter/ Timer
- *Memex Line for Memory Expansion to 100K

STOCK. $295 Assembled & Tested,
Single Quantity Visa, M.C., Amex & COD.
Add $5.00 S & H.
STD Mother Card & Card Cage, STD Dual Channel Serial Card/Protocol Converter & other Product Lines.

Custom Designs & Development Our Specialty.

SYNALTA SYSTEMS
31-14 Broadway Astoria, NY 11106
718/728-6700

Inquiry 340

3M diskettes





5¼"
Specify soft, 10 or 16 sector — Minimum Order 20

Single sided double density	**1.49**ea
Double sided double density	**1.99**ea

Certified Check - Money Order - Personal Check. Allow up to 2 weeks for personal checks to clear. Add $3.00 per 100 or part to each order for U.P.S. shipping charges.
NJ Residents add 6% sales tax.

DATA EXCHANGE, INC.
178 Route 206 South, P.O. Box 993
Department C
Somerville, N.J. 08876 • (201) 874-5050

Inquiry 98

GILTRONIX SWITCHES ARE THE BEST CHOICE.

. . . and here are 10 good reasons why:

IBM PC — **APPLE**



1. Serial (RS232) or Parallel (Centronics)
2. Prompt Deliveries
3. Nationally Advertised Products
4. Broad Product Line
5. Over 30,000 Units Sold to Date
6. Sales and Technical Support
7. F.C.C. Approved Units
8. Manual and Automatic Units
9. Highest Quality PC Board Switch Technology
10. Buy Direct From Giltronix, or From Any Authorized Distributor

Manual Units—2 to 6 Ports
Automatic Units—3 to 15 Ports

Apple is a registered trademark of Apple Computer, Inc.
IBM is a registered trademark of International Business Machines Corporation

Giltronix
3780 Fabian Way
Palo Alto, CA 94303
(415) 493-1300

ORDER HOT-LINE: 1-800-531-1300 (Outside of California)

Inquiry 149

So You Love Your Work Keep It Fun

Let our fast stand alone

Cobol Cross Reference

take the drudgery out of programming!

Your IBM PC w/128K, DOS 2.0, one disk drive and our Program;

- **Will** cross reference and/or print Source Code
- **Will** flag duplicate data names and invalid references.
- **Will** allow more than 1400 data names and 11,000 references
- **Will** process all versions of Cobol
- **Will** be "personalized" with your name on the report heading.

Invest $25.00 in your future

Send check or money order to:

Meta System Inc. of Alaska
2806 Iris Drive
Anchorage, Alaska 99503
Phone 907-243-8619

Inquiry 407

BUILD YOUR IDEAS WITH TUTSIM™



Design a real system model by simulation! TUTSIM allows you the power to model, conduct experiments, evaluate strategies and much more.

TUTSIM models:

- Control and Servo Systems
- Robotics
- Fluid Dynamics
- Batch Chemical Processes
- Biological Processes
- Thermodynamics

Write or call for more information.
For the IBM PC's and other micros.
Short form $29.95



Applied i
200 California Ave., #214
Palo Alto, CA 94306
(415) 325-4800

Inquiry 388

UNLIMITED PERIPHERALS

Disk Trays	
Amaray Media Mate 5	$12
Ring King Data Defender w/Lock	16
Joysticks	
Hayes Mach II	33
Hayes Mach III	41
Hayes Paddles	30
Wico Boss	11
Wico Original Bat Handle	17
Ribbons	
Prowriter/Imagewriter	5
Okidata 82/Gemini 10x/15x	2
MX/FX 80	5
"10" Colors Available! Add 30%	
RAM 64K	
150 nano sec—set of 9	35
Accessories	
Hayes Smartmodem 1200	440
Astar RF Modulator (Apple/IBM)	25
Astar Fan w/surge protection	29
Brooks Surge Stopper VCN 4-6	$25

SOFTWARE TOOL!

25201 La Paz, Laguna Hills, CA 92653
MASTERCARD/VISA ACCEPTED
(CALIF) 1-800-982-5800
(OUTSIDE CALIF) 1-800-633-4787

Inquiry 358

*IBM® Compatible

pc pipeline

E-PROMS — Call! Lowest Prices Anywhere

*4164-150/200	3.99
2764-250	5.75
6116-LP3	4.99
256K	26.50
TTL & HCT Parts — now avail Call	
8087-3-6	89.00
*TM-100-2	169.95
*Teac Half-Heights	164.95
*MPI DSDD	139.95

Excess Inventories Wanted

Add $3.95 shipping to all orders • Prices subject to change • P.O.'s on approval • C.O.D. OK • All new, no surplus, no seconds. QUANTITY DISCOUNTS.
4920 Cypress St., Ste. 100, Tampa, FL 33607
In FL and for info, call 813-875-0299
FOR ORDERS ONLY, 800-237-8910
MasterCard VISA TELEX 330690

Inquiry 273

FREE SOFTWARE

RENT THE PUBLIC DOMAIN!

User Group Software isn't copyrighted, so no fees to pay! 1000's of CP/M and IBM software programs in .COM and source code to copy yourself! Games, business, utilities! All FREE!

CP/M USERS GROUP LIBRARY
Volumes 1–92, 46 disks rental—$45

SIG/M USERS GROUP LIBRARY
Volumes 1–90, 46 disks rental—$45
Volumes 91–172, 40 disks rental—$45
SPECIAL! Rent all SIG/M volumes for $85

MOST FORMATS AVAILABLE! SPECIFY.

IBM PC-SIG (PC-DOS) LIBRARY
Volumes 1–135, 5¼" disks $135

Public Domain User Group Catalog Disk $5 pp. (CP/M only) (payment in advance, please)
Rental is for 7 days after receipt, 3 days grace to return. Use credit card, no disk deposit.

Shipping, handling & insurance—$7.50 per library.
(619) 941-0925 information,
(619) 727-1015 anytime order machine
Have your credit card ready!

Public Domain Software Center
1533 Avohill Dr.
Vista, CA 92083
master charge VISA AM EX.

Inquiry 250

JDR MICRODEVICES HAS JUST SLASHED PRICES OF OVER 100 ITEMS

Dear Gene,

I had just began writing another letter of thanks to all the guys at JDR for coming through again. One of the parts I had ordered wouldn't fit on the particular PC board I was building, so I returned it...I received a non-stock replacement which fit the bill exactly within a week, no charge. That's what I call customer support!

As a JDR customer for several years now, I've seen the growth you've gone through...I only ask that as you grow, you don't entirely lose the concern over the individual customer, as many large companies do. You have my fullest support and recommendation; keep it up.

Brett D'Ambrosio
Cornell University
Ithaca N.Y.

Dear Sir,

Thank you and your company for the fine service you afforded me. I was in a hurry due to the fact that other companies had not been able to fill my order. Not only was your service fast, but it also included a special no-substitutions part. All of the parts I received on time and in perfect condition. I will be using your parts from now on.

Again, Thank You,
Mark P. Lill

Dear Aleida,

...Thank you for your prompt and very helpful response. Everyone I spoke with at JDR made my problem grow smaller and each of you is an example of what makes a company successful.

Very Truly Yours,
James L. Stewart

AND CONTINUES TO OFFER SERVICE WORTHY OF COMMENT

JDR Microdevices
1224 S. Bascom Avenue, San Jose, CA 95128
800-538-5000 • 800-662-6279 (CA) • (408) 995-5430
FAX (408) 275-8415 • Telex 171-110

© Copyright 1984 JDR Microdevices

4164 64K DYNAMIC 200ns 9/39.95

41256 256K DYNAMIC 200ns 29.95

STATIC RAMS

2101	256x4	(450ns)	1.95
5101	256x4	(450ns)(cmos)	3.95
2102-1	1024x4	(450ns)	.89
2102L-4	1024x1	(450ns)(LP)	.99
2102L-2	1024x1	(250ns)(LP)	1.45
2125	1024x1	(45ns)	2.95
2111	256x4	(450ns)	2.49
2111L	256x4	(450ns)(LP)	2.95
2112	256x4	(450ns)	2.99
2114	1024x4	(450ns)	8/9.95
2114-25	1024x4	(250ns)	8/10.95
2114L-4	1024x4	(450ns)(LP)	8/12.95
2114L-3	1024x4	(300ns)(LP)	8/13.45
2114L-2	1024x4	(200ns)(LP)	8/13.95
2114L-15	1024x4	(150ns)(LP)	8/19.95
TC5514	1024x4	(650ns)(cmos)	4.95
2141	4096x1	(200ns)	2.95
2147	4096x1	(55ns)	4.95
2148	1024x4	(70ns)	4.95
TMS4044-4	4096x1	(450ns)	3.49
TMS4044-3	4096x1	(300ns)	3.99
TMS4044-2	4096x1	(200ns)	4.49
TMS40L44-2	4096x1	(200ns)(LP)	4.95
UPD410	4096x1	(100ns)	3.95
MK4118	1024x8	(250ns)	9.95
TMM2016-200	2048x8	(200ns)	4.15
TMM2016-150	2048x8	(150ns)	4.95
TMM2016-100	2048x8	(100ns)	6.15
HM6116-4	2048x8	(200ns)(cmos)	4.75
HM6116-3	2048x8	(150ns)(cmos)	4.95
HM6116-2	2048x8	(120ns)(cmos)	6.95
HM6116LP-4	2048x8	(200ns)(cmos)(LP)	4.95
HM6116LP-3	2048x8	(150ns)(cmos)(LP)	5.95
HM6116LP-2	2048x8	(120ns)(cmos)(LP)	8.95
TC5516	2048x8	(250ns)(cmos)	9.95
TMS4016	2048x8	(200ns)	6.95
Z-6132	4096x8	(300ns)(Qstat)	34.95
HM6264P-15	8192x8	(150ns)(cmos)	24.95
HM6264LP-15	8192x8	(150ns)(cmos)(LP)	27.95
HM6264LP-12	8192x8	(120ns)(cmos)(LP)	29.95

LP=Low power Qstat=Quasi-Static

DYNAMIC RAMS

TMS4027	4096x1	(250ns)	1.99
2107	4096x1	(200ns)	1.95
MM5280	4096x1	(300ns)	1.95
TMS4050	4096x1	(300ns)	1.95
UPD411	4096x1	(300ns)	1.95
TMS4060	4096x1	(300ns)	1.95
MK4108	8192x1	(200ns)	.49
MM5298	8192x1	(250ns)	.49
4116-300	16384x1	(300ns)	8/6.95
4116-250	16384x1	(250ns)	8/6.95
4116-200	16384x1	(200ns)	8/8.95
4116-150	16384x1	(150ns)	8/10.95
4116-120	16384x1	(120ns)	8/12.95
2118	16384x1	(150ns)(5v)	4.95
MK4332	32768x1	(200ns)	9.95
4164-200	65536x1	(200ns)(5v)	9/39.95
4164-150	65536x1	(150ns)(5v)	9/44.95
4164-120	65536x1	(120ns)(5v)	8.95
MCM6665	65536x1	(200ns)(5v)	6.95
TMS4164-20	65536x1	(200ns)(5V)	6.95
TMS4164-15	65536x1	(150ns)(5v)	7.95
4164-REFRESH	65536x1	(150ns)(5V)(REFRESH)	8.95
TMS4416-20	16384x4	(200ns)(5V)	8.95
TMS4416-15	16384x4	(150ns)(5v)	9.95
41256-200	262144x1	(200ns)(5v)	29.95
41256-150	262144x1	(150ns)(5v)	31.95

5v=Single 5 Volt Supply REFRESH=Pin 1 Refresh

EPROMS

1702	256x8	(1us)	4.50
2708	1024x8	(450ns)	3.95
2758	1024x8	(450ns)(5V)	5.95
2716-6	2048x8	(650ns)	2.95
2716	2048x8	(450ns)(5V)	3.95
2716-1	2048x8	(350ns)(5V)	4.95
TMS2516	2048x8	(450ns)(5V)	4.95
TMS2716	2048x8	(450ns)	7.95
TMS2532	4096x8	(450ns)(5V)	4.95
2732	4096x8	(450ns)(5V)	4.95
2732A-4	4096x8	(450ns)(5V)(21V PGM)	4.95
2732A-35	4096x8	(350ns)(5V)(21V PGM)	4.95
2732A	4096x8	(250ns)(5V)(21V PGM)	6.95
2732A-2	4096x8	(200ns)(5V)(21V PGM)	10.95
2764	8192x8	(450ns)(5V)	5.95
2764-250	8192x8	(250ns)(5V)	6.95
2764-200	8192x8	(200ns)(5V)	11.95
TMS2564	8192x8	(450ns)(5V)	10.95
MCM68764	8192x8	(450ns)(5V)(24 pin)	24.95
MCM68766	8192x8	(350ns)(5V)(24 pin)	42.95
27128-45	16384x8	(450ns)(5V)	16.95
27128-30	16384x8	(300ns)(5V)	18.95
27128	16384x8	(250ns)(5V)	19.95

5V=Single 5 Volt Supply 21V PGM=Program at 21 Volts

★★★★HIGH TECH★★★★

NEC μPD7220 $39.95

GRAPHICS DISPLAY CONTROLLER

- ★ FOUR MEGABIT BIT-MAPPED DISPLAY MEMORY
- ★ DRAWS LINES, ARCS, CIRCLES & RECTANGLES AT 1.2 MILLION PIXELS PER SECOND
- ★ ZOOM, PAN, WINDOWING, AND LIGHT PEN CAPABILITIES
- ★ DMA TRANSFER WITH 8257 OR 8237
- ★ UP TO 1024 x 1024 PIXEL GRAPHICS OR 256 x 100 CHARACTERS

★★★★SPOTLIGHT★★★★

ORDER TOLL FREE
800-538-5000
800-662-6279
(CALIFORNIA RESIDENTS)

CRYSTALS

32.768 KHz	1.95
1.0 MHz	3.95
1.8432	3.95
2.0	2.95
2.097152	2.95
2.4576	2.95
3.2768	2.95
3.579545	2.95
4.0	2.95
4.032	2.95
5.0	2.95
5.0688	2.95
5.185	2.95
5.7143	2.95
6.0	2.95
6.144	2.95
6.5536	2.95
8.0	2.95
10.0	2.95
10.738635	2.95
14.31818	2.95
15.0	2.95
16.0	2.95
17.430	2.95
18.0	2.95
18.432	2.95
20.0	2.95
22.1184	2.95
24.0	2.95
32.0	2.95

GENERATORS BIT RATE

MC14411	11.95
BR1941	11.95
4702	12.95
COM5016	16.95
COM8116	10.95
MM5307	10.95

FUNCTION

MC4024	3.95
LM566	1.49
XR2206	3.75
8038	3.95

CRT CONTROLLERS

6845	12.95
68B45	19.95
6847	11.95
68047	24.95
HD46505SP	15.95
MC1372	6.95
8275	29.95
7220	39.95
CRT5027	19.95
CRT5037	34.95
TMS9918A	39.95
DP8350	49.95

DISK CONTROLLERS

1771	15.95
1791	23.95
1793	23.95
1795	23.95
1797	23.95
2791	39.95
2793	39.95
2795	39.95
2797	39.95
6843	34.95
8272	19.95
UPD765	19.95
MB8876	29.95
MB8877	34.95
1691	7.95
2143	7.95

KEYBOARD CHIPS

AY5-2376	11.95
AY5-3600 STD	11.95
AY5-3600 PRO	11.95

CLOCK CIRCUTS

MM5314	4.95
MM5369	1.95
MM5369-EST	1.95
MM5375	4.95
MM58167	8.95
MM58174	11.95
MSM5832	3.95

CRYSTAL OSCILLATORS

1.0MHz	7.95	8.0	7.95
1.8432	7.95	10.0	7.95
2.0	7.95	12.0	7.95
2.4576	7.95	15.0	7.95
2.5	7.95	16.0	7.95
4.0	7.95	18.432	7.95
5.0688	7.95	20.0	7.95
6.0	7.95	24.0	7.95
6.144	7.95		



74LS00

74LS00	.24	74LS189	8.95
74LS01	.25	74LS190	.89
74LS02	.25	74LS191	.89
74LS03	.25	74LS192	.79
74LS04	.24	74LS193	.79
74LS05	.25	74LS194	.69
74LS08	.28	74LS195	.69
74LS09	.29	74LS196	.79
74LS10	.25	74LS197	.79
74LS11	.35	74LS221	.89
74LS12	.35	74LS240	.95
74LS13	.45	74LS241	.99
74LS14	.59	74LS242	.99
74LS15	.35	74LS243	.99
74LS20	.25	74LS244	1.29
74LS21	.29	74LS245	1.49
74LS22	.25	74LS247	.75
74LS26	.29	74LS248	.99
74LS27	.29	74LS249	.99
74LS28	.35	74LS251	.59
74LS30	.25	74LS253	.59
74LS32	.29	74LS257	.59
74LS33	.55	74LS258	.59
74LS37	.35	74LS259	2.75
74LS38	.35	74LS260	.59
74LS40	.25	74LS261	2.25
74LS42	.49	74LS266	.55
74LS47	.75	74LS273	1.49
74LS48	.75	74LS275	3.35
74LS49	.75	74LS279	.49
74LS51	.25	74LS280	1.98
74LS54	.29	74LS283	.69
74LS55	.29	74LS290	.89
74LS63	1.25	74LS293	.89
74LS73	.39	74LS295	.99
74LS74	.35	74LS298	.89
74LS75	.39	74LS299	1.75
74LS76	.39	74LS322	5.95
74LS78	.49	74LS323	3.50
74LS83	.60	74LS324	1.75
74LS85	.69	74LS348	2.50
74LS86	.39	74LS352	1.29
74LS90	.55	74LS353	1.29
74LS91	.89	74LS363	1.35
74LS92	.55	74LS364	1.95
74LS93	.55	74LS365	.49
74LS95	.75	74LS366	.49
74LS96	.89	74LS367	.45
74LS107	.39	74LS368	.45
74LS109	.39	74LS373	1.39
74LS112	.39	74LS374	1.39
74LS113	.39	74LS375	.95
74LS114	.39	74LS377	1.39
74LS122	.45	74LS378	1.18
74LS123	.79	74LS379	1.35
74LS124	2.90	74LS385	3.90
74LS125	.49	74LS386	.45
74LS126	.49	74LS390	1.19
74LS132	.59	74LS393	1.19
74LS133	.59	74LS395	1.19
74LS136	.39	74LS396	1.89
74LS137	.99	74LS399	1.49
74LS138	.55	74LS424	3.95
74LS139	.55	74LS447	1.95
74LS145	1.20	74LS490	1.95
74LS147	2.49	74LS540	1.95
74LS148	1.35	74LS541	1.95
74LS151	.55	74LS624	3.99
74LS153	.55	74LS640	2.20
74LS154	1.90	74LS645	2.20
74LS155	.69	74LS668	1.69
74LS156	.69	74LS669	1.89
74LS157	.65	74LS670	1.49
74LS158	.59	74LS674	14.95
74LS160	.69	74LS682	3.20
74LS161	.65	74LS683	3.20
74LS162	.69	74LS684	3.20
74LS163	.65	74LS685	3.20
74LS164	.69	74LS688	2.40
74LS165	.95	74LS689	3.20
74LS166	1.95	81LS95	1.49
74LS168	1.75	81LS96	1.49
74LS169	1.75	25LS2518	4.13
74LS170	1.49	25LS2521	2.80
74LS173	.69	25LS2538	3.74
74LS174	.55	25LS2569	2.80
74LS175	.55	26LS31	2.19
74LS181	2.15	26LS32	2.19

Z-80

2.5 MHz

Z80-CPU	2.49
Z80-CTC	2.95
Z80-DART	7.95
Z80-DMA	8.95
Z80-PIO	2.95
Z80-SIO/0	9.95
Z80-SIO/1	9.95
Z80-SIO/2	9.95
Z80-SIO/9	9.95

4.0 MHz

Z80A-CPU	2.95
Z80A-CTC	3.95
Z80A-DART	8.95
Z80A-DMA	9.95
Z80A-PIO	3.95
Z80A-SIO/0	10.95
Z80A-SIO/1	10.95
Z80A-SIO/2	10.95
Z80A-SIO/9	10.95

6.0 MHz

Z80B-CPU	8.95
Z80B-CTC	9.95
Z80B-PIO	9.95
Z80B-DART	19.95
Z80B-SIO/0	29.95
Z80B-SIO/2	29.95

ZILOG

Z6132	34.95
Z8671	39.95

6500

1.0 MHz

6502	4.95
65C02(CMOS)	12.95
6504	6.95
6505	8.95
6507	9.95
6520	2.95
6522	5.49
6532	9.95
6545	9.95
6551	9.95

2.0 MHz

6502A	5.95
6520A	5.95
6522A	9.95
6532A	11.95
6545A	12.95
6551A	11.95

3.0 MHz

6502B	8.95

UARTS

AY5-1013	3.95
AY3-1015	6.95
PT1472	9.95
TR1602	3.95
2350	9.95
2651	8.95
IM6402	7.95
IM6403	8.95
UPD7201	19.95
INS8520	10.95

6800

68000-8	39.95
6800	2.95
6802	7.95
6803	19.95
6808	13.90
6809E	8.95
6809	8.95
6810	2.95
6820	4.35
6821	2.95
6828	14.95
6840	12.95
6843	34.95
6844	25.95
6845	12.95
6847	11.95
6850	3.25
6852	5.75
6860	7.95
6875	6.95
6880	2.25
6883	22.95
68047	24.95
68488	19.95

6800=1 MHz

68B00	10.95
68B02	11.95
68B09E	11.95
68B09	11.95
68B10	5.95
68B21	5.95
68B40	19.95
68B45	19.95
68B50	5.95

68B00=2 MHz

8000

8031	29.95
8035	5.95
8039	5.95
INS-8060	17.95
INS-8073	49.95
8080	3.95
8085	4.95
8085A-2	11.95
8086	24.95
8087	175.00
8088	19.95
8089	69.95
8155	6.95
8155-2	7.95
8156	6.95
8185	29.95
8185-2	39.95
8741	29.95
8748	24.95
8749	39.95
8755	24.95

MISC.

UPD7201	19.95
TMS99531	9.95
TMS99532	29.95
ULN2003	2.49
3242	7.95
3341	4.95
MC3470	4.95
MC3480	9.00
11C90	13.95
95H90	7.95
2513-001 up	9.95
2513-002 low	9.95

8200

8202	24.95
8203	39.95
8205	3.50
8212	1.80
8214	3.85
8216	1.75
8224	2.25
8226	1.80
8228	3.49
8237	13.95
8237-5	15.95
8238	4.49
8243	4.45
8250	10.95
8251	3.95
8251A	4.49
8253	6.95
8253-5	7.95
8255	4.49
8255-5	5.25
8257	7.95
8257-5	8.95
8259	6.90
8259-5	7.50
8271	79.95
8272	19.95
8274	39.95
8275	29.95
8279	6.95
8279-5	7.95
8282	6.50
8283	6.50
8284	5.50
8286	6.50
8287	6.50
8288	14.95
8289	49.95
8292	14.95

JDR Microdevices

1224 S. Bascom Avenue, San Jose, CA 95128

800-538-5000 • 800-662-6279 (CA) • (408) 995-5430

FAX (408) 275-8415 • Telex 171-110

© Copyright 1984 JDR Microdevices

RETAIL STORE - 1256 S. BASCOM AVENUE

HOURS: M-W-F, 9-5 TU-TH, 9-9 SAT, 10-3

PLEASE USE YOUR CUSTOMER NUMBER WHEN ORDERING

TERMS: Minimum order $10.00. For shipping and handling include $2.50 for UPS Ground and $3.50 for UPS Air. Orders over 1 lb. and foreign orders may require additional shipping charges - please contact our sales department for the amount. CA. residents must include 6% sales tax, Bay Area and LA residents include 6½%. All merchandise is warranted for 90 days unless otherwise stated. Prices are subject to change without notice. We are not responsible for typographical errors. We reserve the right to limit quantities and to substitute manufacturer. All merchandise subject to prior sale.

Inquiry 382

HM6264P-15 8Kx8 STATIC 150ns 24.95 SSI263 SPEECH SYNTHESIZER 39.95

74S00

74S00	.32	74S135	.89	74S244	2.20
74S02	.35	74S138	.85	74S251	.95
74S03	.35	74S139	.85	74S253	.95
74S04	.35	74S140	.55	74S257	.95
74S05	.35	74S151	.95	74S258	.95
74S08	.35	74S153	.95	74S260	.79
74S09	.40	74S157	.95	74S273	2.45
74S10	.35	74S158	.95	74S274	19.95
74S11	.35	74S161	1.95	74S275	19.95
74S15	.35	74S162	1.95	74S280	1.95
74S20	.35	74S163	1.95	74S283	3.29
74S22	.35	74S168	3.95	74S287	1.90
74S30	.35	74S169	3.95	74S288	1.90
74S32	.40	74S174	.95	74S289	6.98
74S37	.88	74S175	.95	74S299	7.35
74S38	.85	74S180	11.95	74S301	6.95
74S40	.35	74S181	3.95	74S373	2.45
74S51	.35	74S182	2.95	74S374	2.45
74S64	.40	74S185	16.95	74S381	7.95
74S65	.40	74S188	1.95	74S387	1.95
74S74	.50	74S189	6.95	74S399	2.95
74S85	1.99	74S194	1.49	74S412	2.98
74S86	.50	74S195	1.49	74S470	6.95
74S112	.50	74S196	1.49	74S471	4.95
74S113	.50	74S197	1.49	74S472	4.95
74S114	.55	74S201	6.95	74S474	4.95
74S124	2.75	74S225	7.95	74S570	2.95
74S132	1.24	74S226	3.99	74S571	2.95
74S133	.45	74S240	2.20	74S573	9.95
74S134	.50	74S241	2.20	87S181	16.25
				87S185	16.95

7400

7400	.19	7483	.50	74172	5.95
7401	.19	7485	.59	74173	.75
7402	.19	7486	.35	74174	.89
7403	.19	7489	2.15	74175	.89
7404	.19	7490	.35	74176	.89
7405	.25	7491	.40	74177	.75
7406	.29	7492	.50	74178	1.15
7407	.29	7493	.35	74179	1.75
7408	.24	7494	.65	74180	.75
7409	.19	7495	.55	74181	2.25
7410	.19	7496	.70	74182	.75
7411	.25	7497	2.75	74184	2.00
7412	.30	74100	1.75	74185	2.00
7413	.35	74105	1.14	74189	2.99
7414	.49	74107	.30	74190	1.15
7416	.25	74109	.45	74191	1.15
7417	.25	74110	.45	74192	.79
7420	.19	74111	.55	74193	.79
7421	.35	74116	1.55	74194	.85
7422	.35	74120	1.20	74195	.85
7423	.29	74121	.29	74196	.79
7425	.29	74122	.45	74197	.75
7426	.29	74123	.49	74198	1.35
7427	.29	74125	.45	74199	1.35
7428	.45	74126	.45	74221	1.35
7430	.19	74128	.55	74246	1.35
7432	.29	74132	.45	74247	1.25
7433	.45	74136	.50	74248	1.85
7437	.29	74141	.65	74249	1.95
7438	.29	74142	2.95	74251	.75
7439	.79	74143	4.95	74259	2.25
7440	.19	74144	2.95	74265	1.35
7442	.49	74145	.60	74273	1.95
7443	.65	74147	1.75	74276	1.25
7444	.69	74148	1.20	74278	3.11
7445	.69	74150	1.35	74279	.75
7446	.69	74151	.55	74283	2.00
7447	.69	74152	.65	74284	3.75
7448	.69	74153	.55	74285	3.75
7450	.19	74154	1.25	74290	.95
7451	.23	74155	.75	74293	.75
7453	.23	74156	.65	74298	.85
7454	.23	74157	.55	74351	2.25
7460	.23	74159	1.65	74365	.65
7470	.35	74160	.85	74366	.65
7472	.29	74161	.69	74367	.65
7473	.34	74162	.85	74368	.65
7474	.33	74163	.69	74376	2.20
7475	.45	74164	.85	74390	1.75
7476	.35	74165	.85	74393	1.35
7480	.59	74166	1.00	74425	3.15
7481	1.10	74167	2.96	74426	.85
7482	.95	74170	1.65	74490	2.55

CMOS

4000	.29	4532	1.95
4001	.25	4538	1.95
4002	.25	4539	1.95
4006	.89	4541	2.64
4007	.29	4543	1.19
4008	.95	4553	5.79
4009	.39	4555	.95
4010	.45	4556	.95
4011	.25	4558	2.45
4012	.25	4560	4.25
4013	.38	4569	3.49
4014	.79	4581	1.95
4015	.39	4582	1.95
4016	.39	4584	.75
4017	.69	4585	.75
4018	.79	45151	12.95
4019	.39	4702	12.95
4020	.75	4724	1.50
4021	.79	74C00	.35
4022	.79	74C02	.35
4023	.29	74C04	.35
4024	.65	74C08	.35
4025	.29	74C10	.35
4026	1.65	74C14	.59
4027	.45	74C20	.35
4028	.69	74C30	.35
4029	.79	74C32	.39
4030	.39	74C42	1.29
4034	1.95	74C48	1.99
4035	.85	74C73	.65
4040	.75	74C74	.65
4041	.75	74C76	.80
4042	.69	74C83	1.95
4043	.85	74C85	1.95
4044	.79	74C86	.39
4046	.85	74C89	4.50
4047	.95	74C90	1.19
4048	.69	74C93	1.75
4049	.35	74C95	.99
4050	.35	74C150	5.75
4051	.79	74C151	2.25
4052	1.99	74C154	3.25
4053	.79	74C157	1.75
4060	.89	74C160	1.19
4066	.39	74C161	1.19
4068	.39	74C162	1.19
4069	.29	74C163	1.19
4070	.35	74C164	1.39
4071	.29	74C165	2.00
4072	.29	74C173	.79
4073	.29	74C174	1.19
4075	.29	74C175	1.19
4076	.79	74C192	1.49
4077	.59	74C193	1.49
4078	.29	74C195	1.39
4081	.29	74C200	5.75
4082	.29	74C221	1.75
4085	.95	74C244	2.25
4086	.95	74C373	2.45
4093	.49	74C374	2.45
4094	2.99	74C901	.39
4098	2.49	74C902	.85
4099	1.95	74C903	.85
14409	12.95	74C905	10.95
14410	12.95	74C906	.95
14411	11.95	74C907	1.00
14412	12.95	74C908	2.00
14419	7.95	74C909	2.75
14433	14.95	74C910	9.95
4502	.95	74C911	8.95
4503	.65	74C912	8.95
4507	1.25	74C914	1.95
4508	1.95	74C915	1.19
4510	.85	74C918	2.75
4511	.85	74C920	17.95
4512	.85	74C921	15.95
4514	1.25	74C922	4.49
4515	1.79	74C923	4.95
4516	1.55	74C925	5.95
4518	.89	74C926	7.95
4519	.39	74C927	7.95
4520	.79	74C928	7.95
4521	4.99	74C929	19.95
4522	1.25	74C930	4.95
4526	1.25	80C95	.85
4527	1.95	80C96	.95
4528	1.19	80C97	.95
4529	2.95	80C98	1.20
4531	.95		

HIGH SPEED CMOS

A new family of high speed CMOS logic featuring the speed of low power Schottky (8ns typical gate propagation delay), combined with the advantages of CMOS: very low power consumption, superior noise immunity, and improved output drive.

74HC00

74HC: Operate at CMOS logic levels and are ideal for new, all-CMOS designs.

74HC00	.59	74HC175	.99
74HC02	.59	74HC193	1.25
74HC04	.59	74HC194	1.04
74HC08	.59	74HC195	1.09
74HC10	.59	74HC238	1.35
74HC11	.59	74HC240	1.89
74HC14	.79	74HC241	1.89
74HC20	.59	74HC242	1.89
74HC27	.59	74HC243	1.89
74HC30	.59	74HC244	1.89
74HC32	.69	74HC245	1.89
74HC51	.59	74HC251	.89
74HC74	.75	74HC257	.85
74HC75	.85	74HC259	1.39
74HC85	1.35	74HC273	1.89
74HC86	.69	74HC299	4.99
74HC93	1.19	74HC367	.99
74HC125	1.19	74HC373	2.29
74HC132	1.19	74HC374	2.29
74HC138	.99	74HC393	1.39
74HC139	.99	74HC4017	1.99
74HC151	.89	74HC4020	1.39
74HC153	.89	74HC4024	1.59
74HC154	2.49	74HC4040	1.39
74HC157	.89	74HC4049	.89
74HC161	1.15	74HC4050	.89
74HC164	1.25	74HC4060	1.29
74HC166	2.95	74HC4511	2.39
74HC174	.99	74HC4538	2.29

74HCT00

74HCT: Direct, drop-in replacements for LS TTL and can be intermixed with 74LS in the same circuit.

74HCT00	.69	74HCT175	1.09
74HCT02	.69	74HCT193	1.39
74HCT04	.69	74HCT194	1.19
74HCT08	.69	74HCT195	1.29
74HCT10	.69	74HCT238	1.49
74HCT11	.69	74HCT240	2.19
74HCT14	.89	74HCT241	2.19
74HCT20	.69	74HCT242	2.19
74HCT27	.69	74HCT243	2.19
74HCT30	.69	74HCT244	2.19
74HCT32	.79	74HCT245	2.19
74HCT51	.69	74HCT251	1.09
74HCT74	.85	74HCT257	.99
74HCT75	.95	74HCT259	1.59
74HCT85	1.49	74HCT273	2.09
74HCT86	.79	74HCT299	5.25
74HCT93	1.29	74HCT367	1.09
74HCT125	1.29	74HCT373	2.49
74HCT132	1.29	74HCT374	2.49
74HCT138	1.15	74HCT393	1.59
74HCT139	1.15	74HCT4017	2.19
74HCT151	1.05	74HCT4020	1.59
74HCT153	1.05	74HCT4024	1.79
74HCT154	2.99	74HCT4040	1.59
74HCT157	.99	74HCT4049	.99
74HCT161	1.29	74HCT4050	.99
74HCT164	1.39	74HCT4060	1.49
74HCT166	3.05	74HCT4511	2.69
74HCT174	1.09	74HCT4538	2.59

SPECTRONICS CORPORATION

EPROM ERASERS

	Timer	Capacity Chip	Intensity (uW/Cm²)	
PE-14		9	8,000	$83.00
PE-14T	x	9	8,000	$119.00
PE-24T	x	12	9,600	$175.00
PL-265T	x	30	9,600	$255.00
PR-125T	x	25	17,000	$349.00
PR-320T	x	42	17,000	$595.00

VOLTAGE REGULATORS

TO-220 CASE PACKAGE

7805T	.75	7905T	.85
7808T	.75	7908T	.85
7812T	.75	7912T	.85
7815T	.75	7915T	.85
7824T	.75	7924T	.85

TO-3 CASE PACKAGE

7805K	1.39	7905K	1.49
7812K	1.39	7912K	1.49
7815K	1.39	7915K	1.49
7824K	1.39	7924K	1.49

TO-92 CASE PACKAGE

78L05	.69	79L05	.79
78L12	.69	79L12	.79
78L15	.69	79L15	.79

OTHER VOLTAGE REGS

78M05C	5volt	½amp	TO-220	.35
LM323K	5volt	3amp	TO-3	4.95
LM338K	Adj.	5amp	TO-3	3.95
78H05K	5volt	5amp	TO-3	9.95
78H12K	12volt	5amp	TO-3	9.95
78P05K	5volt	10amp	TO-3	14.95
UA78S40	FAIRCHILD		DIP	1.95

LINEAR

LM301	.34	LM567	.89
LM301H	.79	NE570	3.95
LM307	.45	NE571	2.95
LM308	.69	NE590	2.50
LM308H	1.15	NE592	.98
LM309H	1.95	LM709	.59
LM309K	1.25	LM710	.75
LM310	1.75	LM711	.79
LM311	.64	LM723	.49
LM311H	.89	LM723H	.55
LM312H	1.75	LM733	.98
LM317K	3.95	LM741	.35
LM317T	1.19	LM741N-14	.35
LM318	1.49	LM741H	.40
LM318H	1.59	LM747	.69
LM319H	1.90	LM748	.59
LM319	1.25	LM1014	1.19
LM320	see7900	LM1303	1.95
LM322	1.65	LM1310	1.49
LM323K	4.95	MC1330	1.69
LM324	.59	MC1349	1.89
LM329	.65	MC1350	1.19
LM331	3.95	MC1358	1.69
LM334	1.19	MC1372	6.95
LM335	1.40	LM1414	1.59
LM336	1.75	LM1458	.59
LM337T	1.95	LM1488	.69
LM337K	3.95	LM1489	.69
LM338K	3.95	LM1496	.85
LM339	.99	LM1558H	3.10
LM340	see7800	LM1800	2.37
LM348	.99	LM1812	8.25
LM350K	4.95	LM1830	3.50
LM350T	4.60	LM1871	5.49
LM358	.69	LM1872	5.49
LM359	1.79	LM1877	3.52
LM376	3.75	LM1889	1.95
LM377	1.95	LM1896	1.75
LM378	2.50	ULN2003	1.29
LM379	4.50	XR2206	3.75
LM380	.89	LM2877	2.05
LM380N-8	1.10	LM2878	2.25
LM381	1.60	LM2900	.85
LM382	1.60	LM2901	1.00
LM383	1.95	MPQ2907	1.95
LM384	1.95	LM2917	2.95
LM386	.89	LM3900	.59
LM387	1.40	LM3905	1.25
LM389	1.35	LM3909	.98
LM390	1.95	LM3911	2.25
LM392	.69	LM3914	3.95
LM393	1.29	LM3915	3.95
LM394H	4.60	LM3916	3.95
LM399H	5.00	MC4024	3.95
NE531	2.95	MC4044	4.50
NE555	.34	RC4136	1.25
NE556	.65	RC4151	3.95
NE558	1.50	LM4250	1.75
NE564	2.95	LM4500	3.25
LM565	.99	RC4558	.69
LM566	1.49	LM13600	1.49
		LM13700	1.45

H=TO-5 CAN, K=TO-3, T=TO-220

RCA

CA3023	2.75	CA3083	1.55
CA3039	1.29	CA3086	.80
CA3046	1.25	CA3089	2.99
CA3059	2.90	CA3096	3.49
CA3060	2.90	CA3130	1.30
CA3065	1.75	CA3140	1.15
CA3080	1.10	CA3146	1.85
CA3081	1.65	CA3160	1.19
CA3082	1.65	CA3183	.99

TI

TL494	4.20	75365	1.95
TL496	1.65	75450	.59
TL497	3.25	75451	.39
75107	1.49	75452	.39
75108	1.49	75453	.39
75110	1.95	75454	.39
75150	1.95	75491	.79
75154	1.95	75492	.79
75188	1.25	75493	.89
75189	1.25	75494	.89

BI FET

TL066	.99	LF347	2.19
TL071	.79	LF351	.60
TL072	1.19	LF353	1.00
TL074	2.19	LF355	1.10
TL081	.79	LF356	1.10
TL082	1.19	LF357	1.40
TL083	1.19	LF411	1.29
TL084	2.19	LF412	1.99

TRANSISTORS

2N918	.50	2N3772	1.85
MPS918	.25	2N3903	.25
2N2102	.75	2N3904	.10
2N2218	.50	2N3906	.10
2N2218A	.50	2N4122	.25
2N2219	.50	2N4123	.25
2N2219A	.50	2N4249	.25
2N2222	.25	2N4304	.75
PN2222	.10	2N4401	.25
MPS2369	.25	2N4402	.25
2N2484	.25	2N4403	.25
2N2905	.50	2N4857	1.00
2N2907	.25	PN4916	.25
PN2907	.13	2N5086	.25
2N3055	.79	PN5129	.25
3055T	.69	PN5139	.25
2N3393	.30	2N5209	.25
2N3414	.25	2N6028	.35
2N3563	.40	2N6043	1.75
2N3565	.40	2N6045	1.75
PN3565	.25	MPS-A05	.25
MPS3638	.25	MPS-A06	.25
MPS3640	.25	MPS-A13	.40
PN3643	.25	MPS-A55	.25
PN3644	.25	MPU-131	.99
MPS3704	.15	TIP29	.65
MPS3706	.15	TIP31	.75
		TIP32	.79

IC SOCKETS

	1-99	100
8 PIN ST	.13	.11
14 PIN ST	.15	.12
16 PIN ST	.17	.13
18 PIN ST	.20	.18
20 PIN ST	.29	.27
22 PIN ST	.30	.27
24 PIN ST	.30	.27
28 PIN ST	.40	.32
40 PIN ST	.49	.39
64 PIN ST	4.25	CALL

ST=SOLDERTAIL

8 PIN WW	.59	.49
14 PIN WW	.69	.52
16 PIN WW	.69	.58
18 PIN WW	.99	.90
20 PIN WW	1.09	.98
22 PIN WW	1.39	1.28
24 PIN WW	1.49	1.35
28 PIN WW	1.69	1.49
40 PIN WW	1.99	1.80

WW=WIREWRAP

INTERFACE

8T26	1.59
8T28	1.98
8T95	.89
8T96	.89
8T97	.89
8T98	.89
DM8131	2.95
DP8304	2.29
DS8833	2.25
DS8835	1.99
DS8836	.99
DS8837	1.65
DS8838	1.30

INTERSIL

ICL7106	9.95
ICL7107	12.95
ICL7660	2.95
ICL8038	3.95
ICM7207A	5.59
ICM7208	15.95

DATA AQC

ADC0800	15.55
ADC0804	3.49
ADC0809	4.49
ADC0816	14.95
ADC0817	9.95
ADC0831	8.95
DAC0800	4.49
DAC0806	1.95
DAC0808	2.95
DAC1020	8.25
DAC1021	7.95
DAC1022	5.95
MC1408L6	1.95
MC1408L8	2.95

EXAR

XR2206	3.75
XR2207	3.75
XR2208	3.75
XR2211	5.25
XR2240	3.25

9000

9304	.95
9316	1.00
9328	1.49
9334	2.50
9368	3.95
9401	9.95
9601	.75
9602	1.50
9637	2.95
96S02	1.95

SOUND CHIPS

76477	3.95
76488	5.95
76489	8.95
SSI-263	39.95
AY3-8910	12.95
AY3-8912	12.95
MC3340	1.49
SP1000	39.00

OPTO-ISOLATORS

4N26	1.00	MCA-7	4.25
4N27	1.10	MCA-225	1.75
4N28	.69	IL-1	1.25
4N33	1.75	ILA-30	1.25
4N35	1.25	ILQ-74	2.75
4N37	1.25	H11C5	1.25
MCT-2	1.00	TIL-111	1.00
MCT-6	1.50	TIL-113	1.75

VISA MasterCard

MICRODEVICES AT MICROPRICES

© Copyright 1984 JDR Microdevices

DB25S RS232 FEMALE SOLDER CUP 2.25

DB25P RS232 MALE SOLDER CUP 1.90

BARGAIN HUNTERS CORNER

2 LEVEL WIRE WRAP SOCKETS

THESE SOCKETS HAVE .50" LEADS. JUST A LITTLE SHORTER THAN THAN THE STANDARD 3 LEVEL WIRE WRAP SOCKETS WITH .67" LEADS.

	1-99	100-UP
8 PIN WW-2	.40	.35
14 PIN WW-2	.45	.39
16 PIN WW-2	.45	.39
20 PIN WW-2	.75	.59
22 PIN WW-2	.50	.39
24 PIN WW-2	.89	.75
28 PIN WW-2	.89	.75
40 PIN WW-2	.99	.89

SPECIALS END 1/31/85

RF MODULATOR (ASTEC UM1082)

QUANTITIES LIMITED

- PRESET TO CHANNEL 3
- USE TO BUILD TV-COMPUTER INTERFACE
- +5 VOLT OPERATION

$6.95



EMI FILTER

- MAJOR MANUFACTURER
- LOW COST
- FITS LC-HP BELOW



$4.95

LINE CORDS

LC-2	2 CONDUCTOR	6 ft	.39
LC-3	3 CONDUCTOR	6 ft	.99
LC-HP	3 CONDUCTOR WITH STANDARD FEMALE SOCKET	6 ft	1.49
LC-CIR	CIGARETTE LIGHTER PLUG WITH 6 ft COILED CORD		2.95

MUFFIN FANS

4.68" SQUARE	14.95
3" SQUARE	14.95

CAPACITORS

TANTALUM

1.0µf	15V	.40	.47µf	35V	.50
6.8	15V	.70	1.0	35V	.45
10	15V	.80	2.2	35V	.65
22	15V	1.35	4.7	35V	.85
.22	35V	.40	10	35V	1.00

DISC

10pf	50V	.05	560	50V	.05
22	50V	.05	680	50V	.05
25	50V	.05	820	50V	.05
27	50V	.05	.001µf	50V	.05
33	50V	.05	.0015	50V	.05
47	50V	.05	.0022	50V	.05
56	50V	.05	.005	50V	.05
68	50V	.05	.01	50V	.07
82	50V	.05	.02	50V	.07
100	50V	.05	.05	50V	.07
220	50V	.05	.1	12V	.10

MONOLITHIC

.01µf	50V	.14	.1µf	50V	.18
.047µf	50V	.15	.47µf	50V	.25

ELECTROLYTIC

	RADIAL			AXIAL	
1µf	25V	.14	1µf	50V	.14
2.2	35V	.15	4.7	16V	.14
4.7	50V	.15	10	16V	.14
10	50V	.15	10	50V	.16
47	35V	.18	22	16V	.14
100	16V	.18	47	50V	.20
220	35V	.20	100	15V	.20
470	25V	.30	100	35V	.25
2200	16V	.60	220	25V	.30
			330	16V	.40
COMPUTER GRADE			550	16V	.42
			1000	16V	.60
44,000µf 30V 3.95			2200	16V	.70
			6000	16V	.85

RESISTORS

¼ WATT 5% CARBON FILM
ALL STANDARD VALUES
FROM 1 OHM TO 10 MEG OHM

50 PIECES SAME VALUE	.025
100 PIECES SAME VALUE	.02
1000 PIECES SAME VALUE	.015

BYPASS CAPS

.01 µf DISC	100/$6.00
.01 µf MONOLITHIC	100/$12.00
.1 µf DISC	100/$8.00
.1 µf MONOLITHIC	100/$15.00

EDGECARD CONNECTORS

S-100 ST	S-100	3.95
S-100 WW	S-100	4.95
72 PIN ST		6.95
72 PIN WW		7.95
62 PIN ST	IBM PC	4.95
50 PIN ST	APPLE	4.95
44 PIN ST		2.95
44 PIN WW		4.95

DIODES

1N751	5.1 VOLT ZENER	.25
1N759	12.0 VOLT ZENER	.25
1N4148	(1N914)SWITCHING	25/1.00
1N4001	50PIV 1A	12/1.00
1N4004	400PIV RECTIFIER	10/1.00
1N5402	200PIV 3A	.25
KBP02	200PIV 1.5A BRIDGE	.45
KBP04	400PIV 1.5A BRIDGE	.55
MDA801	50PIV 12A BRIDGE	1.39
MDA980-1	50PIV 12A BRIDGE	1.95
MDA980-2	100PIV 12A BRIDGE	2.25
VM48	DIP-BRIDGE	.35

LED DISPLAYS

HP5082-7760	CC	.43"	1.29
MAN-72	CA	.3"	.99
MAN-74	CC	.3"	.99
FND-537(359)	CC	.375"	1.25
FND-500(503)	CC	.5"	1.49
FND-507(510)	CA	.5"	1.49
TIL-311 4x7 HEX W LOGIC		.270"	9.95

HARD TO FIND "SNAPABLE" HEADERS

Can easily be snapped apart to make any size header, all with .1" centers

1x36	STRAIGHT LEAD	.99
2x40	STRAIGHT LEAD	2.49
2x40	RIGHT ANGLE	2.99

SHORTING BLOCKS



SPACED AT .1" CENTERS
IDEAL FOR DISK DRIVES
OR ANY .1" HEADER

5/1.00

DIP SWITCHES

4 POSITION	.85
5 POSITION	.90
6 POSITION	.90
7 POSITION	.95
8 POSITION	.95
10 POSITION	1.29

36 PIN CENTRONICS

IDCEN36	RIBBON CABLE MALE	8.95
IDCEN36 F	RIBBON CABLE FEMALE	8.95
CEN36	SOLDER CUP MALE	7.95

DIP CONNECTORS

DESCRIPTION	ORDER BY	CONTACTS							
		8	14	16	18	20	22	24	28	40
HIGH RELIABILITY TOOLED ST IC SOCKETS	AUGATxxST	.99	.99	.99	1.69	1.89	1.89	1.99	2.49	2.99
HIGH RELIABILITY TOOLED WW IC SOCKETS	AUGATxxWW	1.30	1.80	2.10	2.40	2.50	2.90	3.15	3.70	5.40
COMPONENT CARRIES (DIP HEADERS)	ICCxx	.49	.59	.69	.99	.99	.99	.99	1.09	1.49
RIBBON CABLE DIP PLUGS (IDC)	IDPxx	---	.95	.95	---	---	---	1.75	---	2.95

FOR ORDERING INSTRUCTIONS SEE IDC CONNECTORS BELOW

HEAT SINKS

TO-220	SCREW ON	.35
TO-220	CLIP ON	.35
TO-3	SCREW ON	.95
TO-220	INSULATOR	10/1.00
TO-3	INSULATOR	10/1.00

SWITCHES

SPDT	MINI-TOGGLE ON-ON	1.25
DPDT	MINI-TOGGLE ON-ON	1.50
DPDT	MINI-TOGGLE ON-OFF-ON	1.75
SPST	MINI-PUSHBUTTON N.O.	.39
SPST	MINI-PUSHBUTTON N.C.	.39
BCD OUT 10 POSITION 6 PIN DIP		1.95

DIFFUSED LEDS

		1-99	100-up
JUMBO RED	T1¾	.10	.09
JUMBO GREEN	T1¾	.18	.15
JUMBO YELLOW	T1¾	.18	.15
MOUNTING HDW	T1¾	.10	.09
MINI RED	T1	.10	.09
MINI GREEN	T1	.18	.15
MINI YELLOW	T1	.18	.15
RECT RED	2x5mm	.25	.22
RECT GREEN	2x5mm	.30	.27
RECT YELLOW	2x5mm	.30	.27

D-SUBMINIATURE

DESCRIPTION		ORDER BY	CONTACTS				
			9	15	25	37	50
SOLDER CUP	MALE	DBxxP	1.19	1.59	1.90	2.85	4.25
	FEMALE	DBxxS	1.50	1.85	2.25	3.90	5.25
RIGHT ANGLE PC SOLDER	MALE	DBxxPR	1.65	2.20	3.00	4.83	---
	FEMALE	DBxxSR	2.18	3.03	3.00	6.19	---
WIRE WRAP	MALE	DBxxPWW	1.69	2.56	3.89	5.60	---
	FEMALE	DBxxSWW	2.76	4.27	6.84	9.95	---
IDC RIBBON CABLE	MALE	IDBxxP	2.95	3.90	4.75	6.95	---
	FEMALE	IDBxxS	3.25	4.29	5.25	7.95	---
HOODS	BLACK	HOOD-B	---	---	.99	---	---
	GREY	HOOD	.89	.99	.99	1.09	1.19

MOUNTING HARDWARE-$1.00

FOR ORDERING INSTRUCTIONS SEE IDC CONNECTORS BELOW



IDB37S



DB37S



DB25SR

TEXTOOL ZERO INSERTION FORCE SOCKETS AND RECEPTACLES



SCREWDRIVER CLAMP
ECONO ZIF



LEVER CLAMP
ZIF SOCKET



WW RECEPTACLES
ZIF RECEPTACLE

TYPE	CONTACTS				
	14	16	24	28	40
ECONO ZIF	---	4.95	6.75	7.75	9.95
ZIF SOCKET	4.95	4.95	5.95	6.95	9.95
ZIF RECEPTACLE	8.25	8.75	9.75	10.50	12.75

IDC CONNECTORS

DESCRIPTION	ORDER BY	CONTACTS					
		10	20	26	34	40	50
SOLDER HEADER	IDHxxS	.82	1.29	1.68	2.20	2.58	3.24
RIGHT ANGLE SOLDER HEADER	IDHxxSR	.85	1.35	1.76	2.31	2.72	3.39
WW HEADER	IDHxxW	1.86	2.98	3.84	4.50	5.28	6.63
RIGHT ANGLE WW HEADER	IDHxxWR	2.05	3.28	4.22	4.45	4.80	7.30
RIBBON HEADER SOCKET	IDSxx	.79	.99	1.39	1.59	1.99	2.25
RIBBON HEADER	IDMxx	---	5.50	6.25	7.00	7.50	8.50
RIBBON EDGE CARD	IDExx	1.75	2.25	2.65	2.75	3.80	3.95

ORDERING INSTRUCTIONS: INSERT THE NUMBER OF CONTACTS IN THE POSITION MARKED "xx" OF THE "ORDER BY" PART NUMBER LISTED. EXAMPLE: A 10 PIN RIGHT ANGLE HOLDER STYLE WOULD BE IDH10SR



IDH20WR



IDE50

RIBBON CABLE

CONTACTS	SINGLE COLOR		COLOR CODED	
	1'	10'	1'	10'
10	.18	1.60	.83	7.30
16	.28	2.50	1.00	8.80
20	.36	3.20	1.25	11.00
25	.45	4.00	1.32	11.60
26	.46	4.10	1.32	11.60
34	.61	5.40	1.65	14.50
40	.72	6.40	1.92	16.80
50	.89	7.50	2.50	22.00

JDR Microdevices

1224 S. Bascom Avenue, San Jose, CA 95128
800-538-5000 • 800-662-6279 (CA) • (408) 995-5430
FAX (408) 275-8415 • Telex 171-110

RETAIL STORE - 1256 S. BASCOM AVENUE
HOURS: M-W-F, 9-5 TU-TH, 9-9 SAT, 10-3

PLEASE USE YOUR CUSTOMER NUMBER WHEN ORDERING

TERMS: Minimum order $10.00. For shipping and handling include $2.50 for UPS Ground and $3.50 for UPS Air. Orders over 1 lb. and foreign orders may require additional shipping charges - please contact our sales department for the amount. CA. residents must include 6% sales tax, Bay Area and LA residents include 6½%. All merchandise is warranted for 90 days unless otherwise stated. Prices are subject to change without notice. We are not responsible for typographical errors. We reserve the right to limit quantities and to substitute manufacturer. All merchandise subject to prior sale.

© Copyright 1984 JDR Microdevices

Inquiry 384

IBM PC PROTOTYPE CARD WITH DECODING CIRCUITRY $29.95

WIRE WRAP PROTOTYPE CARDS

FR-4 EPOXY GLASS LAMINATE
WITH GOLD-PLATED EDGE-CARD FINGERS



IBM-PR2

IBM

BOTH CARDS HAVE SILK SCREENED LEGENDS AND INCLUDES MOUNTING BRACKET

IBM-PR1	WITH +5V AND GROUND PLANE	$27.95
IBM-PR2	AS ABOVE WITH DECODING CIRCUITRY	$29.95

S-100

P100-1	BARE - NO FOIL PADS	$15.15
P100-2	HORIZONTAL BUS	$21.80
P100-3	VERTICAL BUS	$21.80
P100-4	SINGLE FOIL PADS PER HOLE	$22.75

APPLE

P500-1	BARE - NO FOIL PADS	$15.15
P500-3	HORIZONTAL BUS	$22.75
P500-4	SINGLE FOIL PADS PER HOLE	$21.80
7060-45	FOR APPLE IIe AUX SLOT	$30.00

GENERAL PURPOSE

22/44 PIN EDGE-CARD (.156" SPACING)

P441-1	BARE - NO FOIL PADS 4.5" x 6.0"	$9.45
P441-3	VERTICAL BUS 4.5" x 6.0"	$13.95
P441-4	SINGLE FOIL PADS 4.5" x 6.0"	$14.20
P442-1	BARE - NO FOIL PADS 4.5" x 9.0"	$10.40
P442-3	VERTICAL BUS 4.5" x 9.0"	$14.20
P442-4	SINGLE FOIL PADS 4.5" x 9.0"	$13.50

36/72 PIN EDGE-CARD (.1" SPACING)

P721-1	BARE - NO FOIL PADS 4.5" x 6.0"	$9.45
P721-3	VERTICAL BUS 4.5" x 6.0"	$13.25
P721-4	SINGLE FOIL PADS 4.5" x 6.0"	$14.20
P722-1	BARE - NO FOIL PADS 4.5" x 9.0"	$10.40
P722-3	VERTICAL BUS 4.5" x 9.0"	$14.20
P722-4	SINGLE FOIL PADS 4.5" x 9.0"	$15.15

BARE GLASS BOARDS

NO EDGE-CARD FINGERS OR FOIL

P25x45	2.5" x 4.5"	$2.40
P45x65	4.5" x 6.5"	$4.70
P45x85	4.5" x 8.5"	$6.20
P45x170	4.5" x 17.0"	$11.35
P85x170	8.5" x 17.0"	$18.95

EXTENDER CARDS

IBM	$45.00
APPLE	$45.00
MULTIBUS	$86.00

DISK DRIVES

TANDON

TM 100-1 5¼" (FOR IBM) SS/DD	$199.00
TM 100-2 5¼" (FOR IBM) DS/DD	$199.95

MPI

MPI-B52 5¼" (FOR IBM) DS/DD	$139.95

TEAC

FD-55B ½ HEIGHT DS/DD	$139.95
FD-55F ½ HEIGHT DS/QUAD	$200.00

SHUGART

SA 400L 5¼" (40 TRACK) SS/DD	$199.95
SA 460 5¼" (80 TRACK) DS/QUAD	$199.95

8" DISK DRIVES

FD100-8 BY SIEMENS, SHUGART 801 EQUIV. SS/DD 10/$129.95 ea.	$149.95
FD200-8 BY SIEMENS, SHUGART 851 EQUIV. DS/DD 10/$185.00 ea.	$$195.00

JFORMAT-2 $49.95
SUPPORT FOR QUAD DENSITY DRIVES FROM TALL TREE SYSTEMS

PLEASE INCLUDE SUFFICENT AMOUNT FOR SHIPPING ON ABOVE ITEMS



TEAC FD-55B



TANDON TM100-2

DISK DRIVE CABINETS

CABINET #1 $29.95
- Fits one full height 5¼"disk drive
- Color matches Apple

CABINET #2 $79.00
- Fits one full height 5¼"disk drive
- Complete with power supply, switch, line cord, fuse and standard power connector
- Please specify Grey or Tan

CABINET #3 $89.95
- Fits two half height 5¼"disk drives
- Complete with power supply, switch, line cord, fuse and standard power connectors

8" DISK DRIVE CABINETS ALSO AVAILABLE-PLEASE CALL

PLEASE INCLUDE SUFFICIENT AMOUNT FOR SHIPPING ON ABOVE ITEMS

SWITCHING POWER SUPPLIES



PS-IBM $175.00
- FOR IBM PC-XT COMPATIBLE
- 130 WATTS
- +5V @ 15A, +12V @ 4.2A -5V @ .5A, -12V @ .5A
- ONE YEAR WARRANTY



PS-A $49.95
- USE TO POWER APPLE TYPE SYSTEMS
- +5V @ 4A, +12V @ 2.5A -5V @ .5A, -12V @ .5A
- APPLE POWER CONNECTOR



PS-3 $39.95
- AS USED IN APPLE III
- +5V @ 4A, +12V @ 2.5A -5V @ .25A, -12V @ .30A,
- 15.5" x 4.5" x 2", .884 LBS.



PS-TDK $59.95
- +5V @ 5A, +12V @ 2A +12V @ 2.8A, -12V @ .30A
- 6.2" x 7.4" x 1.7", 1.6 LBS.

OK INDUSTRIES

EX-1 IC EXTRACTION TOOL
- ONE PIECE METAL CONSTRUCTION
- EASILY EXTRACTS 8-24 PIN DEVICES
- LOW COST $2.19



EX-1

EX-2 IC EXTRACTION TOOL
- EXTRACTS 24-40 PIN DEVICES
- HEAVY DUTY METAL CONSTRUCTION
- GROUND LUGS FOR MOS EXTRACTIONS
- EASY ONE HAND OPERATION $12.74

IC INSERTION TOOLS

INS-1416	for 14-16 pin IC's	$5.15
MOS-1416	for 14-16 pin IC's	$10.92
MOS-2428	for 24-28 pin IC's	$10.92
MOS-40	for 40 pin IC's	$12.43

MOS series insertion tools have metal constuction and include grounding lug for CMOS applications.



INS-1416 INS-2428

BW-630 WIRE WRAP GUN
- BATTERY POWERED-USES 2 NI-CAD C CELLS(NOT INCLUDED)
- POSITIVE INDEXING
- ANTI-OVERWRAP DEVICE $41.55



BW-630

WSU-30 WIRE WRAP TOOLS
- WRAPS, STRIPS, AND UNWRAPS
- WSU-30M WRAPS AN EXTRA TURN OF INSULATION

WSU-30 $8.84/WSU-30M $10.14

WSU-30/30M

WIRE WRAP TERMINALS

WWT-1	SLOTTED	25/$7.06
WWT-2	SINGLE SIDED	25/$4.25
WWT-3	IC SOCKET	25/$7.06
WWT-4	DOUBLE SIDED	25/2.80
INS-1	INSERTION TOOL	$3.64

WIRE DISPENSER
- WITH 50' ROLL OF WIRE
- BUILT IN PLUNGER CUTS WIRE
- BUILT IN STRIPPER STRIPES 1"
- REFILLABLE

WD-30 $6.50 Specify Blue, white, Yellow or Red

WD-30TRI $9.50 With 50' of each: Red, Blue and White



SOCKET-WRAP I.D.™
- SLIPS OVER WIRE WRAP PINS
- IDENTIFIES PIN NUMBERS ON WRAP SIDE OF BOARD
- CAN WRITE ON PLASTIC; SUCH AS IC #

PINS	PART#	PCK. OF	PRICE
8	IDWRAP 08	10	1.95
14	IDWRAP 14	10	1.95
16	IDWRAP 16	10	1.95
18	IDWRAP 18	5	1.95
20	IDWRAP 20	5	1.95
22	IDWRAP 22	5	1.95
24	IDWRAP 24	5	1.95
28	IDWRAP 28	5	1.95
40	IDWRAP 40	5	1.95

PLEASE ORDER BY NUMBER OF PACKAGES (PCK. OF)



WIRE WRAP WIRE

PRECUT AND STRIPPED

Note: 1 inch of insulation is stripped on each end. A 3.5" wire has only 1.5" of insulation.

LENGTH (INCHES)	QUANTITY 100	500	1000
2.5	1.60	4.70	8.20
3	1.60	4.70	8.20
3.5	1.65	5.00	8.90
4	1.75	5.40	9.60
4.5	1.80	5.75	10.30
5	1.85	6.10	11.00
5.5	1.90	6.50	11.75
6	2.00	6.85	12.50
6.5	2.30	7.80	14.30
7	2.40	8.20	15.05
7.5	2.50	8.55	15.85
8	2.60	8.95	16.60
8.5	2.65	9.30	17.40
9	2.70	9.80	18.15
9.5	2.80	10.00	18.95
10	2.90	10.50	19.70

PRECUT ASSORTMENT IN ASSORTED COLORS $27.50

100ea: 5.5", 6", 6.5", 7"
250ea: 2.5", 4.5", 5"
500ea: .3", 3.5", 4"

SPOOLS

100 feet	$4.30	250 feet	$7.25
500 feet	$13.25	1000 feet	$21.95

Please specify color:
Blue, Black, Yellow or Red

TRANSFORMERS

FRAME STYLE

12.6V AC	2 AMP	4.95
12.6V AC CT	2 AMP	5.95
12.6V AC CT	4 AMP	7.95
12.6V AC CT	8 AMP	10.95
25.2V AC CT	2 AMP	7.95

PLUG CASE STYLE

12V AC	250ma	3.95
12V AC	500ma	4.95
12V AC	1 AMP	5.95
12V AC	2 AMP	6.95

DC ADAPTER

6, 9, 12V DC SELECTABLE WITH UNIVERAL ADAPTER 8.95

MICROCOMPUTER HARDWARE HANDBOOK

FROM ELCOMP $14.95

Over 800 pages of manufacturer's data sheets on the most commonly used IC's
- TTL - 74, 74LS & 74F
- CMOS
- Voltage regulators
- Memory - RAM, ROM, EPROM
- CPU'S - 6800, 6500, Z80, 8080, 8085 & 8086/8
- MPU Support & Interface, 6800, 6500, Z80, 8200, etc.

VISA

MasterCard

ORDER TOLL FREE
800-538-5000
800-662-6279
(CALIFORNIA RESIDENTS)

GE NICKEL-CADIUM RECHARGABLE BATTERIES

NI-CAD CHARGER PACKAGE

PRICE INCLUDES CHARGER (WALL PLUG), BATTERIES, & MODULAR BATTERY HOLDER

AAA CELLS	QTY. 2	$11.71
AA CELLS	QTY. 2	$11.71
C CELLS	QTY. 2	$13.21
D CELLS	QTY. 2	$13.21
9 VOLT	QTY. 1	$13.21

BATTERIES ONLY

AAA CELLS	PKG. 2	$6.07 pr.
AA CELLS	PKG. 1	$3.03 ea.
C CELLS	PKG. 1	$3.78 ea.
D CELLS	PKG. 1	$3.78 ea.
9 VOLT	PKG. 1	$7.57 ea.



20 MHz DUAL TRACE OSCILLOSCOPE

FROM RAMSEY ELECTRONICS

UNSURPASSED QUALITY AT AN UNBEATABLE PRICE

- BAND WIDTH- DC: DC TO 20MHz (-3db) AC: 10Hz TO 20MHz (-3db)
- SWEEP TIME- 2 μSEC TO .5 SEC/DIV ON 20 RANGES
- VERT./HORZ. DEFLECTION: 5mV TO 20V/DIV ON 20 RANGES
- COMPLETE MANUAL AND HIGH QUALITY HOOK-ON PROBES INCLUDED
- INPUT IMPEDANCE: 1 MEG OHM
- TV VIDEO SYNC FILTER
- X, Y AND Z AXIS OPERATION
- 110/220 VOLT 50/60Hz OPERATION
- COMPONENT TESTER
- LP CONSUMPTION—19 WATTS
- BUILT IN CALIBRATOR
- AUTOMATIC OR TRIGGERED TIMEBASE

$399.95 WITH PROBES

FULL ONE YEAR WARRANTY

MULTIMETER PEN



AUTO RANGING, POLARITY & DECIMAL!
- LARGE 3½ DIGIT DISPLAY
- DATA HOLD SWITCH FREEZES READING
- FAST, AUDIBLE CONTINUITY TEST
- LOW BATTERY INDICATOR
- OVERLOAD PROTECTION
- ONLY 1⅛" x 6¼" x ¾"
- DC VOLTS .1mV-500V
- AC VOLTS 1mV-500V
- .1 OHM-20 MEG OHMS
- WEIGHS ONLY 2.3 OUNCES
- LOW PARTS COUNT-CUSTOM 80 PIN LSI INSURES RELIABILITY
- INCLUDES MANUAL, BATTERIES, SOFT CASE, 2 PROBE TIPS, AND ALLIGATOR CLIP

SOAR corporation

ONLY $49.95

© Copyright 1984 JDR Microdevices

TEAC-FD55B DS/DD ½ HT. FOR IBM PC 139.95

MPI-B52 DS/DD FULL HT. FOR IBM PC 139.95

EPROM PROGRAMMER
FOR APPLE COMPUTERS

RP525 $79.95

- LOW COST
- DUPLICATE OR BURN ANY STANDARD 2700 SERIES EPROM
- MENU DRIVEN SOFTWARE INCLUDED-NO ADDITIONAL SOFTWARE REQUIRED
- AUTOMATIC SELECTION FOR 2716, 2732, 2732A, 2764 & 27128
- LED INDICATORS FOR ACTIVITY
- HIGH SPEED WRITE ALGORITHM
- NO EXTERNAL POWER SUPPLY



MAXIMIZE YOUR IBM PC OR XT!

MAXIMUM FLEXIBILITY-All of the most asked for support features on one card plus **SOFTDISK** and **SPOOL** software to increase your PC's productivity!
MAXIMUM PERFORMANCE PER DOLLAR-Compare features with the best selling multifunction card and save!
MAXIMUM RELIABILITY-The **MAXIMIZER** features the highest quality **4-LAYER** board construction, sockets for all **RAM**, and is backed by a full!
ONE YEAR WARRANTY

SIGMA DESIGNS, INC.

MAXIMIZER

COMPARE!

	MAXIMIZER	AST 6-PACK +
Maximum Memory	384K / 512K[1]	384K
RS-232 Serial	2[2]	1
Parallel Port	1	1
Clock Calendar	YES	YES
Game Adaptor	Optional	Optional

[1] with optional 128K MAXISTACK
[2] second serial port optional

$259.95 (64K)

OPTIONS:

2nd Serial Port	49.95
Game Adaptor	29.95
128K Maxistack	159.95
Additional 64K Ram	39.95

APPLE ACCESSORIES



BAL-525 $139.95

- ½ HEIGHT-ALPS MECHANISM
- 100% APPLE COMPATIBLE
- FULL 1 YEAR WARRANTY



BAL-500 $169.95

- TEAC MECHANISM- DIRECT DRIVE
- 100% APPLE COMPATIBLE- 35 TRACK
- 40 TRACK WHEN USED WITH OPTIONAL CONTROLLER



MITAC AD-1 $179.95

- FULL HEIGHT SHUGART MECHANISM
- DIRECT REPLACEMENT FOR APPLE DISK II



JDR 16K RAM CARD $39.95

BARE PC CARD AND INSTUCTIONS $9.95

- 2 YEAR WARRANTY
- EXPAND YOUR 48K APPLE TO 64K
- USE IN PLACE OF APPLE LANGUAGE CARD

OTHER ACCESSORIES

BMC BX-80	$249.00
CONTROLLER CARD	$49.95
VIEWMAX-80	$159.95
VIEWMAX-80e	$129.95
GRAPHMAX	$129.95
THUNDERCLOCK	$129.95
KRAFT JOYSTICK	$39.95
POWER SUPPLY	$49.95
ZVM-123 GREEN MON	$105.00
BMC AU9191U COLOR MON	$279.00

DISKETTE FILE

$8.95 IF PURCHASED WITH 50 DISKETTES OR MORE

$9.95 IF PURCHASED ALONE

BY DEALING DIRECT WITH THE FACTORY, WE CAN MAKE THIS UNBEATABLE OFFER

- ATTRACTIVE, SMOKED ACRYLIC CASE WITH SIX INDEXED DIVIDERS
- RUGGED, HIGH QUALITY CONSTRUCTION
- HOLDS 70 5¼" DISKETTES, WITH ROOM TO SPARE



*NASHUA DISKETTES

5¼" SOFT SECTOR
DOUBLE SIDED, DOUBLE DENSITY
WITH HUB RINGS

BULK PACKAGED IN FACTORY SEALED BAGS OF 50. INCLUDES DISKETTE SLEEVES AND WRITE PROTECT TABS. IDEAL FOR SCHOOLS, CLUBS, AND USERS GROUPS. THIS IS A SPECIAL PURCHASE, QUANTITIES ARE LIMITED. 5 YEAR WARRANTY.

$1.39ea. QTY 250 **$1.49ea. QTY 100** **$1.59ea. QTY 50**

**NASHUA DISKETTES WERE JUDGED TO HAVE THE HIGHEST POLISH AND RECORDED AMPLITUDE OF ANY DISKETTES TESTED. (SEE "COMPARING FLOPPY DISKS", BYTE9/84)*

WANT TO ADD AN INTERNAL HARD DISK DRIVE TO YOUR IBM PC?

....BUT DISCOVER THAT YOUR POWER SUPPLY CAN'T HANDLE THE LOAD?

JDR HAS CAREFULLY SELECTED THE HIGHEST QUALITY FULLY IBM COMPATIBLE POWER SUPPLY AVAILABLE.

COMPARE
THESE FEATURES

- XT COMPATIBLE
- 1YEAR WARRANTY
- HIGH QUALITY CONSTRUCTION
- PLUG COMPATIBLE CONNECTORS
- FITS INTO EXSISTING MOUNTING HOLES
- SOLID 130 WATT OUTPUT
  +5V @ 15A +12V @ 4.2A
  -5V @ .5A -12V @ .5A



$175.00

DISK DRIVES FOR YOUR IBM

TEAC FD55B ½HEIGHT	MPI 52B (same as Tandon)	TANDON TM 100-2
$139.95	$139.95	$199.95

VERBATIM

DATALIFE DISKETTES

SS/DD SOFT	$29.95
SS/DD 10 SECTOR	$29.95
DS/DD SOFT	$34.95

JDR Microdevices

1224 S. Bascom Avenue, San Jose, CA 95128
800-538-5000 • 800-662-6279 (CA) • (408) 995-5430
FAX (408) 275-8415 • Telex 171-110

RETAIL STORE - 1256 S. BASCOM AVENUE
HOURS: M-W-F, 9-5 TU-TH, 9-9 SAT, 10-3

PLEASE USE YOUR CUSTOMER NUMBER WHEN ORDERING

TERMS: Minimum order $10.00. For shipping and handling include $2.50 for UPS Ground and $3.50 for UPS Air. Orders over 1 lb. and foreign orders may require additional shipping charges - please contact our sales department for the amount. CA. residents must include 6% sales tax, Bay Area and LA residents include 6½%. All merchandise is warranted for 90 days unless otherwise stated. Prices are subject to change without notice. We are not responsible for typographical errors. We reserve the right to limit quantities and to substitute manufacturer. All merchandise subject to prior sale.

© Copyright 1984 JDR Microdevices

APPLE IS A TRADEMARK OF APPLE COMPUTER CO.

Inquiry 386

U·N·C·L·A·S·S·I·F·I·E·D A·D·S

BYTE is concerned about software piracy. Unclassified ads proposing exchanges of software must specify that the software was written by the individual or is in the public domain. BYTE reserves the right to reject any unclassified ad that does not meet this criterion.

DONATE: Your used computer equipment to a nonprofit organization for tax benefits. I will place your equipment with appropriate parties and oversee the documentation and physical transfer for free. Richard Hanson, POB 23438, Pleasant Hill, CA 94523, (415) 932-8856 or (415) 939-1246 modem.

WANTED: Tax-deductible donations of business and educational computer hardware to nonprofit education center for rural American Indians. Materials will be used for computer literacy, computer-assisted instruction, job training, and center administration. Roundhouse Council, American Indian Education Center, c/o Michael Guttman, 975 East Ave., Suite 150, Chico, CA 95926, (916) 895-9131.

WANTED: Nonprofit college seeks tax-deductible donations of computers, printers, and terminals. Certified receipts available. Colorado Baptist College, 11111 East Mississippi Ave., Aurora, CO 80012, (303) 363-0937.

NEEDED: 256K IBM PC or compatible, terminal, monitor, disk drive, printer, related hardware. Tax-deductible donation for CAI by beginning sociology students. Shipping reimbursed. Dr. Douglas L. White, Computers in the Sociology Classroom Project, 307 Reuther Bldg., Henry Ford Community College, Dearborn, MI 48128.

WANTED: The Poetry Resource Center of Michigan, a nonprofit, tax-exempt organization serving the literary community of Michigan, needs donations of IBM or plug-compatible equipment for word processing, record keeping, and office management. Yonah Karp, PRC, 621 South Washington Ave., Royal Oak, MI 48067, (313) 399-3163/865-8513.

WANTED: Nondenominational Christian church seeks donation of microcomputer and peripherals for use in Christian school and church administration. Will pay shipping and give receipt. Glen Gardeski, 233 Lansing St., Utica, NY 13501, (315) 724-0219.

WANTED: Graduate student in exhibit on history of calculating devices needs anything in hardware representative of early computer generations, paper tape, punch cards, slide rules, pictures, etc. Project unfunded, but willing to pay shipping and discuss small payment for some items. Donated items will be credited. Roger Wallace, 2360 Grandview Terrace, Manhattan, KS 66502.

WANTED: Graduate with knowledge of COBOL, FORTRAN, BASIC, etc. and programming experience in system and application software seeks correspondents. Worked on file management utilities, text editor, spooler, report utility. Developed in C BASIC (order/invoice/sales/inventory/payroll systems). Stellus Pereira, Jeffrin Cottage, Opp I.I.T. Main Gate, Powai, Bombay 400 076, India.

NEEDED: Inexpensive, used, or unwanted material relating to Z80 and 68000 programming. I've built a homebrew that needs an assembler and improved operating system. Any public-domain subroutines or algorithms printed on paper only would be appreciated. Michael Sanders, #228183, Wynne 12T, Huntsville, TX 77349.

NEEDED: Seminary graduate turned software engineer (cowrote Tandy's ALDS), beginning CHARIS Christian videotex service, seeks equipment (exchanged for free advertising) and technical expertise in starting this ministry to churches. For free brochure, send SASE. Christian Helps and Resources Information Service, Attn: Larry West, POB 79635, Saginaw, TX 76179-0635.

FOR SALE: Ohio Scientific Inc. hardware. Get on our mailing list. Walt Thomas, RD #1, Box 135, Linden, PA 17744, (717) 398-1893.

WANTED: Electronics engineering student needs contributions of electronics/computer books, magazines, training kits, or equipment. Donation of Apple peripherals, especially a disk drive, most welcome. James Y. Kwan, Room 307, Third Floor, 1109 Severino Reyes St., Santa Cruz, Manila, 2805, Philippines.

WANTED: BYTE 1975–1982. *Softalk* No. 1 through September 1982. *Nibble* No. 1–Vol. 2, No. 8 and Vol. 4, No. 7. Junichiro Kida, 1566-220, Nara-cho, Midoriku, Yokohama 227, Japan.

FOR SALE: Micropolis SS/DD 5¼-inch disk drive, Model 1021-2: $150. Micropolis S-100-bus disk-controller board, Model 107: $160. Includes manuals. J. Tyler, Robert Gordon's Institute of Technology, School of Mathematical Sciences and Computer Studies, St. Andrew St., Aberdeen, Scotland AB1 1HG, U.K., 0224 633611 ext. 462.

FOR SALE: Vector Graphics 5002 two-user system with 2×64K RAM monitors, 600K 5¼-inch floppy- and 5-megabyte hard-disk drives, Hayes Smartmodem 100, 3-port serial interface, and TI 810 printer. Original cost $12,000+; best offer. Rick Smith, 9801 Vieux Carre #16, Louisville, KY 40223, (502) 244-1748.

FOR SALE: Osborne I, two SS/SD floppy-disk drives: $650. Bob Phalen, 21 Ozone Ave. #21, Venice, CA 90291, (213) 450-9111 ext. 2718.

FOR SALE: Commodore 64 Executive portable. Built-in disk drive and color monitor, modem, joystick, and KoalaPad: $950. P. D. Bailey, 203 Willow Way, Vicksburg, MS 39180, (601) 634-2824.

FOR SALE: Paper Tiger 440 printer plus parallel interface card. Includes all information, cables, and ribbons, excellent condition: $300 or best offer. Dr. R. E. Crowder, 460 North Terrace Dr., Wichita, KS 67208, (316) 684-5184.

WANTED: Epson QX-10 system, Hayes 300/1200-bps modem, and stand-alone hard disks for our users group's RBBS systems. Fellow QXers are welcome to send SASE for a sample newsletter. EUG, Box 1076, Lemont, PA 16851, (814) 237-5511.

FOR SALE: Eagle monochrome monitor and color card in mint condition; fully compatible with IBM monochrome monitor and color card. List price over $600; asking $400. Kenneth Tam, 68 East Broadway, New York, NY 10002, (212) 226-6248 after 6 p.m.

FOR SALE: Brand new Tandon TM848-1E and –2E OEM 8-inch drive service manual in factory binder: $25 plus postage or best offer. Bill Weinel, 139 Pineland Circle, Raleigh, NC 27606, (919) 851-1270.

FOR SALE: HP 82905B dot-matrix printer (Opt 248), the HPIL version for use with HP 41, HP 75,-or HP 71B. New $795; will sell for $350. John Gilby, Site 11, Compartment 175, RR #3, Sydney, Nova Scotia B1P 6G5, Canada.

FOR SALE: Apple dot-matrix printer used for only four months, excellent condition: $280 negotiable. Joe Genduso, College Station, Lafayette College, POB 4391, Easton, PA 18042.

FOR SALE: First 16 issues of BYTE. Send SASE and reasonable offer. Henry Shaw, POB 275, Cape May Point, NJ 08212.

FOR SALE: Public-domain interactive structured Z80 assembly-language compiler and screen editor. Steve Allen, 5016 48th SW, Seattle, WA 98136.

FOR SALE: Tandon TM-100-2 double-sided, 5¼-inch drive, never used: $190. Fred Orkin, 630 South Bowman Ave., Merion Station, PA 19066, (215) 448-7960.

WANTED: Altair S-100 case with motherboard and power supply—just the box. Looks are unimportant. Gerald Henrici, 11 Varick St. #5M, New York, NY 10013, (212) 966-0410 days, (212) 966-4499 evenings.

FOR SALE: *Kilobaud* No. 1–53, except No. 48. All in good condition: $100 plus shipping or best offer. Thomas Aulicino, 2014 59th St., Brooklyn, NY 11204.

FOR SALE: OSI C8PDF 48K static RAM with video board to interface with TV. Has tone generator with color/graphics capabilities, and includes modem and RF interface: $2200 or best offer. I will pay shipping. M. Chew, POB 32372, Pensacola, FL 32514.

FOR TRADE: PC1401 programs I developed for ham radio, navigation, electronics, statistics, and memos. Exchange on noncommercial basis. Goetz Kluge, Meisenweg 16, 8011 Vaterstetten, West Germany.

FOR SALE: New S-100 12-slot motherboard, power supply, and cabinet by XOR, two 8-inch Siemens FDD 100-8 floppy-disk drives: $550. Amber monitor (Zenith ZVM-122): $85. Ken Skelps, 39 Holly Ave., Shalimar, FL 32579, (904) 651-5826.

FOR SALE: A Bell Data 2400-bps type modem with serial inputs, power input, 2400/1200/300 switchable data rates, originate, answer, auto-answer, full/half-duplex, synchronous or asynchronous. Worth $3200; sell for $1200. Lyle Jackson, 1120 Pine Hill Rd., McLean, VA 22101, (703) 356-5215.

WANTED: Single-sheet feeder for NEC 5530 printer. Gregory Grover, 3558 Mandeville Canyon Rd., Los Angeles, CA 90049.

FOR SALE: S-100 computer system, IMSAI 8080 computer, 20-slot motherboard, 64K RAM, four SIO ports, disk controller, front panel card, cabinet, power supply, two ICOM disk drives, Hazeltine Espirit I terminal, and documentation: $1500 or best offer. R. L. Dalzell, c/44th Signal BN, APO NY 09175, (Federal Republic of Germany) 6151-68315.

WANTED: Technical information for TI 99/4A, interfacing information, schematics, etc. Also, used HP 41cv calculator. Joseph Walker, Rt. 3, Box 287, Ruston, LA 71270.

WANTED: Users/owners/operators, I'm starting an international bulletin-board system listing; if interested, please send description of your BBS and phone number. Moore & Co., 301 Nottingham Dr., Brick Town, NJ 08724.

FOR SALE: Brand new green DEC Rainbow 100 monitor: $275. Joyce Goodrich, 315 East 68th St., New York, NY 10021, (212) 879-9771.

WANTED: High school student needs IBM PC-compatible equipment: disk drives, disk controller, video controller, monitor, keyboard, power supply, and case. Donations or discounts welcome; I will pay postage. Daniel Miller, 6349 County Rd. 11A, Garrett, IN 46738, (219) 357-3710.

WANTED: College student seeks donation of hardware and software documentation for the HP 3000. Also, a terminal for timesharing on the HP 3000. I will pay shipping. Christopher M. Heim, 6431 Valley Hi Dr., Sacramento, CA 95823, (916) 456-3661.

WANTED: Telecomputer for telemarketing. Unit is a dedicated microprocessor with two tape decks. Automatically dials every tenth number in a telephone exchange and dials numbers preprogrammed into memory. Capable 50 calls per hour. Give manufacturer's name, when bought, condition, and your price. Art Rein, 32 New York Ave., Freeport, NY 11520, (516) 379-6421.

WANTED: High school student needs donated computers and peripherals to pursue career in programming or electronics. Apples, TRS-80s, Zeniths, S-100, or CP/M preferred. Will pay postage. Scott Lawler, 1700 Tampico Court, Petaluma, CA 94952.

FOR SALE: Tandon CDC 5¼-inch SS/DD disk drives. Limited quantity of used B: drives in excellent condition: $75. Larry Furman, 81 Holly Ave., Staten Island, NY 10308, (718) 317-6803.

FOR SALE: DEC PRO-350, 512K, P/OS, DCL, and LA50 printer: $4500 or best offer. Mike Saltz, 606 El Redondo, Redondo Beach, CA 90277, (213) 379-0891.

FOR SALE: BYTE July 1976–June 1981. Book *Best of BYTE* #1. *Kilobaud* September 1977–September 1981 (except October 1977, January, February, and May 1978). *Dr. Dobbs Journal* February 1977–January 1981. Mark Tait, 5395 Burford St., San Diego, CA 92111.

UNCLASSIFIED POLICY: *Readers who have computer equipment to buy, sell, or trade or who are requesting or giving advice may send a notice to BYTE for inclusion in the Unclassified Ads section. To be considered for publication, an advertisement must be noncommercial and nonprofit (individuals or bona fide computer clubs), typed double-spaced, contain 60 words or less, and include name and address. This is a free service; notices are printed as space permits. Your confirmation of placement is appearance in an issue of BYTE as we engage in no correspondence. Please allow at least four months for your ad to appear. Send your notices to BYTE, Unclassified Ads, POB 372, Hancock, NH 03449.*

B·O·M·B

BYTE's Ongoing Monitor Box

ARTICLE#	PAGE	ARTICLE	AUTHOR(S)
1	98	Ciarcia's Circuit Cellar: Understanding Linear Power Supplies	Ciarcia
2	113	The Visual Mind and the Macintosh	Benzon
3	135	A Glimpse into Future Television	Nadan
4	155	Microsoft Macintosh BASIC Version 2.0	Williams
5	167	The Apple Story, Part 2: More History and the Apple III	Williams, Moore
6	183	Uninterruptible Power Supplies	Rynone
7	197	An Introduction to Fiber Optics, Part 2: Connections and Networks	Shuford
8	211	Algorithms for a Variable-Precision Calculator	Nilson
9	223	Audio-Frequency Analyzer	Banes
10	255	Font Design for Personal Workstations	Bigelow
11	275	Expert Systems—Myth or Reality?	D'Ambrosio
12	290	The HP 110 Portable Computer	Haas
13	305	Gifford's MP/M 8-16	Strom
14	317	Lotus's Symphony	Pountain
15	329	MagicPrint	Miller
16	337	The Hewlett-Packard ThinkJet Printer	Haas
17	345	The TI Omni 800/Model 855 Printer	Haas
18	363	Computing at Chaos Manor: The Fast Lane	Pournelle
19	401	BYTE U.K.: The Amstrad CPC 464	Pountain
20	415	BYTE West Coast: Light Touches	Markoff, Robinson
21	429	BYTE Japan: The New and the Old	Raike

PC AT Preview Wins

The product description of "The IBM PC AT," compiled by BYTE staff members Rich Malloy, G. Michael Vose, Tom Clune, and George Bond, is the winning article in the October BYTE. Steve Ciarcia's "An Ultrasonic Ranging System" wins second-place mention. Computing at Chaos Manor encountered only "Minor Problems" this month and wins Jerry Pournelle third place. "Database Types" by Rich Krajewski is fourth. And fifth in the winning lineup is "Generating and Testing Pseudorandom Numbers" written by Charles A. Whitney. Mr. Whitney is also the winner of the first-place award of $100, for his was the first non-staff-written article that placed in the top five. Therefore, the winner of the second-place award of $50 is actually sixth in the lineup: Edward A. Rothchild, author of "Optical Memory: Data Storage by Laser." Congratulations, gentlemen.

BYTE ADVERTISING SALES STAFF:

J. Peter Huestis, Advertising Sales Manager, 70 Main Street, Peterborough, NH 03458, tel. (603) 924-9281

NEW ENGLAND
ME, NH, VT, MA, RI
Paul McPherson Jr. (617) 262-1160
McGraw-Hill Publications
575 Boylston Street
Boston, MA 02116

ATLANTIC
NY, NYC, CT
Dick McGurk (212) 512-3588
Leah Goldman (212) 512-2096
McGraw-Hill Publications
1221 Avenue of the Americas—39th Floor
New York, NY 10020

EAST
PA (EAST), NJ (SOUTH), MD, VA, W.VA, DE, D.C.
Daniel Ferro (215) 496-3833
McGraw-Hill Publications
Three Parkway
Philadelphia, PA 19102

SOUTHEAST
NC, SC, GA, FL, AL, TN
Maggie M. Dorvee (404) 252-0626
McGraw-Hill Publications
4170 Ashford-Dunwoody Road—Suite 420
Atlanta, GA 30319

MIDWEST
IL, MO, KS, IA, ND, SD, MN, WI, NB
Bob Denmead (312) 751-3740
McGraw-Hill Publications
Blair Building
645 North Michigan Ave.
Chicago, IL 60611

GREAT LAKES, OHIO REGION
MI, OH, PA (ALLEGHENY), KY, IN, EASTERN CANADA
Mike Kisseberth (313) 352-9760
McGraw-Hill Publications
4000 Town Center—Suite 770
Southfield, MI 48075

SOUTHWEST, ROCKY MOUNTAIN
UT, CO, WY, OK, TX, AR, MS, LA
Dennis Riley (214) 458-2400
McGraw-Hill Publications
Prestonwood Tower—Suite 907
5151 Beltline
Dallas, TX 75240

SOUTH PACIFIC
SOUTHERN CA, AZ, NM, LAS VEGAS
Jack Anderson (714) 557-6292
McGraw-Hill Publications
3001 Red Hill Ave.
Building #1—Suite 222
Costa Mesa, CA 92626

Karen Niles (213) 480-5243, 487-1160
McGraw-Hill Publications
3333 Wilshire Boulevard #407
Los Angeles, CA 90010

NORTH PACIFIC
HI, WA, OR, ID, MT, NORTHERN CA, NV (except LAS VEGAS), W. CANADA
David Jern (415) 362-4600
McGraw-Hill Publications
425 Battery Street
San Francisco, CA 94111

Bill McAfee (415) 964-0624
McGraw-Hill Publications
1000 Elwell Court—Suite 225
Palo Alto, CA 94303

WEST COAST SURPLUS AND RETAIL ACCOUNTS
Tom Harvey (805) 964-8577
3463 State Street—Suite 256
Santa Barbara, CA 93105

Post Card Mailings National
Bradley Browne (603) 924-6166
BYTE Publications
70 Main Street
Peterborough, NH 03458

International Advertising Sales Representatives:

Mr. Hans Csokor
Publimedia
Reisnerstrasse 61
A-1037 Vienna, Austria

Mrs. Gurit Gepner
McGraw-Hill Publishing Co.
PO Box 2156
Bat Yam, 59121 Israel
866 561 321 39

Mr. Fritz Krusebecker
McGraw-Hill Publishing Co.
Liebigstrasse 19
D-6000 Frankfurt/Main 1
West Germany
72 01 81

Mrs. Maria Sarmiento
Pedro Teixeira 8, Off. 320
Iberia Mart I
Madrid 4, Spain
45 52 891

Mr. Andrew Karnig
Andrew Karnig & Associates
Finnbodavagen
S-131 31 Nacka, Sweden
46-8-44 0005

Mr. Jean Christian Acis
McGraw-Hill Publishing Co.
17 rue Georges Bizet
F 75116 Paris
France
720 33 42

Mr. Arthur Scheffer
McGraw-Hill Publishing Co.
34 Dover St.
London W1X 3RA
England 01 493 1451

Mr. Savio Pesavento
McGraw-Hill Publishing Co.
Via Flavio Baracchini 1
20123 Milan, Italy
86 90 656

Seavex Ltd.
400 Orchard Road, #10-01
Singapore 0923
Republic of Singapore
Tel: 734-9790
Telex: RS35539 SEAVEX

Seavex Ltd.
503 Wilson House
19-27 Wyndham St.
Central, Hong Kong
Tel: 5-260149
Telex: 60904 SEVEX HX

Hiro Morita
McGraw-Hill Publishing Co.
Overseas Corp.
Room 1528
Kasumigaseki Bldg.
3-2-5 Kasumigaseki,
Chiyoda-Ku
Tokyo 100, Japan
581 9811

R·E·A·D·E·R S·E·R·V·I·C·E

Inquiry No.		Page No.
1	1st PLACE SYSTEMS	240
2	800 SOFTWARE	134
3	A.S.T. RESEARCH	19
4	A.S.T. RESEARCH	19
5	AB COMPUTERS	254
6	ABC DATA PRODUCTS	408
7	ACL INC.	158
8	ADDMASTER CORP.	322
9	ADV. COMP. PROD.	463
10	ADV. COMPUTER SYS.	421
11	ADV. SYS. CONCEPTS	92
12	ADVANCED MEMORIES	369
13	ALF PRODUCTS, INC.	396
14	ALL ELECTRONICS CORP.	67
15	ALLOY COMP. PROD.	152, 153
16	AMARAY CORP.	175
17	AMBER SYSTEMS	46, 47
18	AMBER SYSTEMS	277
20	AMPERE INC.	283
21	AMPRO COMPUTERS INC.	436
23	ANCHOR AUTOMATION	374
24	ANTEX DATA SYS.	237
*	APPLE COMPUTER INC.	CII, 1
388	APPLIED I	486
25	APPLIED COMPUTER PROD.	208
26	APPLIED COMPUTER PROD.	209
27	APPLIED SOFTWARE TECH.	93
28	APROPOS TECHNOLOGY	460
29	ARCTEC SYSTEMS	18
30	ARTIFICIAL INT'L. RESEARCH	351
31	ARTISOFT	76
32	ARTISOFT	76
33	ASHTON-TATE	398, 399
34	AVERY LABEL	130
35	AVERY LABEL	130
36	AVIS RENT-A-CAR SYSTEMS	395
37	AVOCET	368
38	B&B ELECTRONICS	388
*	B&C MICROSYSTEMS	467
400	BASF SYSTEMS	281
39	BAY TECHNICAL ASSOC.	23
40	BINARY TECHNOLOGY	482
41	BLAISE COMPUTING INC.	262
*	BORLAND INT'L.	28, 29
42	BORLAND INT'L.	41
43	BOTTOM LINE, THE	141
*	BYTE PUBL. INC.	412
*	BYTE BACK ISSUES	403
*	BYTE SUBSCRIBER NOTICE	439
*	BYTE SUBSCRIBER SERVICE	268
*	BYTE SUBSCRIBER SERVICE	439
44	BYTEK COMP. SYS. CORP.	178
*	C WARE/DESMET C	173
*	C-SYSTEMS	340
47	C.S.D. INC.	431
*	CALIF. DIGITAL	448, 449
*	CALIF. MICRO COMP.	340
50	CANDELARIA WORKS	324
51	CAPITAL EQUIPMENT CORP.	219
408	CDR	471
52	CHIPSOFT, INC.	356
53	CHORUS DATA SYSTEMS	154
54	CHRISLIN IND. INC.	222
55	CITIZEN AMERICA	326, 327
56	CIVIL COMPUTING CORP.	404
57	CLINICAL MICROSYSTEMS INC.	408
58	CMA MICRO COMP. DIV.	94
401	COGITATE	403
59	COMMERCIAL BUSINESS SYS.	454
60	COMMUNICATION CABLE CO.	382
61	COMP. COMPNTS. UNLTD.	480, 481
*	COMPAQ COMPUTER CORP.	264, 265
62	COMPETITIVE EDGE	86
64	COMPUCART	202
66	COMPUMAIL	483
67	COMPUPRO	191
68	COMPUSERVE	11
69	COMPUTER AFFAIRS INC.	382
70	COMPUTER BROKERAGE SERV.	50
71	COMPUTER CHANNEL	220
*	COMPUTER CHRONICLES	16
*	COMPUTER CHRONICLES	424
72	COMPUTER CONNECTION INC.	461
73	COMPUTER DISCOUNT PROD.	453
74	COMPUTER EDITYPE SYS.	246
75	COMPUTER EXPO INC.	322
76	COMPUTER MAIL ORDER	132, 133
77	COMPUTER NOVELTY CORP.	382
78	COMPUTER PARTS MERCHANT	458
79	COMPUTER SWAP SHOP	340
*	COMPUTER WAREHOUSE	157
80	COMPUTERBANC	60
81	COMPUTERLANE	351
82	COMPUTERS AND MORE	181
83	COMPUTERS FOR LESS	74
84	CONROY-LAPOINTE	228, 229
85	CONROY-LAPOINTE	228, 229
86	CONROY-LAPOINTE	228, 229
88	CORVUS SYS INC.	299
89	COSMOS	316
90	CROMEMCO	5
91	CUESTA SYSTEMS	373
92	CUSTOM COMP. TECH.	450
93	CUSTOM COMP. TECH.	451
94	CYMA CORPORATION	205
95	CYMA CORPORATION	205
96	DATA ELECTRONICS INC.	323
97	DATA ELECTRONICS INC.	323
99	DATA EXCHANGE	471
98	DATA EXCHANGE	486
376	DATA GENERAL CORP.	20, 21
101	DATA SPEC.	76
102	DATA SPEC.	76
103	DATA TRANSLATION INC.	84
104	DATASOUTH COMP. CORP.	210
105	DIGI DATA CORP.	38
106	DIGITAL ELECT. SYS.	242
107	DIGITAL PRODUCTS INC.	171
*	DIGITAL RESEARCH COMP.	78
108	DIGITALK	405
109	DIRECT-CONNECT DEVICES	462
110	DISCOUNT COMPUTER	148
*	DISCOUNT COMPUTER CENTERS	179
87	DISK JOCKEY	388
111	DISKETTE CONNECTION	437
112	DISKS PLUS	404
113	DISKWORLD, INC.	457
114	DISPLAY TELECOMMNCTNS.	484, 485
115	DIVERSIFIED COMPUTER SYS.	482
116	DOKAY COMP. PROD. INC.	468, 469
117	DOKAY COMP. PROD. INC.	470
118	DOW JONES SOFTWARE	200
119	DOW JONES SOFTWARE	201
120	DOW JONES SOFTWARE	259
121	DWIGHT CO., INC.	460
122	DYSAN CORP.	71
*	ECONOMY SOFTWARE	354
123	EDUCATIONAL MICROCOMP.	351
*	ELLIS COMPUTING INC.	77
*	EMPIRICAL RESEARCH GROUP	217
*	ENCHANTED FOREST	408
126	ENFIN RESOURCES, INC.	170
128	ERICSSON COMPUTER CO.	56, 57
130	EXPOTEK	260
131	EXPRESS BUSINESS SOFTWARE	203
132	EXSEL INC.	467
133	FLAGSTAFF ENGINEERING	402
134	FORTRON, INC.	452
135	FORTRON, INC.	452
136	FOX & GELLER INC.	216
137	FOX SOFTWARE INC.	467
138	FRIENDLY COMPUTER	90
139	FUJITSU AMERICA	248
140	FUJITSU AMERICA	249
141	GENERAL DATACOMM.	284, 285
143	GENERAL DATACOMM.	471
144	GENERAL MICROSYSTEMS	471
145	GENERAL TECHNOLOGY	245
146	GENESIS MICROSYSTEMS	119
147	GENICOM	79
148	GIFFORD COMP. SYS./ZITEL CORP.	352
149	GILTRONIX, INC.	486
150	GOLD HILL COMPUTERS	112
151	GOLDEN BOW SYSTEMS	462
152	GREAT SALT LAKE COMP.	456
153	GTEK INC.	70
154	H&E COMPUTRONICS	215
155	HADAX ELECTRONICS	356
387	HALLOCK SYS.	180
156	HAMMER COMPUTER SYSTEMS	482
157	HANDWELL CORP.	459
158	HARMONY VIDEO & COMP.	74
159	HARMONY VIDEO & COMP.	436
160	HERCULES COMPUTER TECH.	25
161	HEWLETT-PACKARD	390, 391
389	HEWLETT-PACKARD	35
162	HOFFMAN INT'L.	482
163	HOOLEON COMPANY	189
164	HOUSTON INSTR/BAUSCH&LOMB	271
*	HYPERON SOFTWARE	482
165	IBM — (ISG) SERVICES	304
166	IBM CORP.	109, 110, 111
168	IBM CORP.	334, 335
410	ILLUMINATED TECH.	16
*	INDEPENDENT BUSINESS SYS.	266
169	INFOCOM	36, 37
170	INMAC	171
171	INNOVATIVE SOFTWARE	422, 423
172	INOVION CORP.	160
173	INTEGRAND	417
174	INTELLIGENT DATA SYS. INC.	53
175	INTERACTIVE STRUCTURES	26
177	INTERACTIVE STRUCTURES	66
176	INTERACTIVE STRUCTURES	85
178	INTERFACE, INC.	145
179	INTERFACE, INC.	145
180	INTERFACE TECH. CORP.	410, 411
181	INTERTEC DATA SYS.	15
182	IOMEGA	193
403	ITT INFORMATION SYSTEMS	163
404	ITT INFORMATION SYSTEMS	163
185	IADE COMP. PROD.	464, 465
186	IADE COMP. PROD.	466
187	IAMECO ELECTRONICS	252, 253
381	IDR MICRODEVICES INC.	487
382	IDR MICRODEVICES INC.	488
383	IDR MICRODEVICES INC.	489
384	IDR MICRODEVICES INC.	490
385	IDR MICRODEVICES INC.	491
386	IDR MICRODEVICES INC.	492
191	KADAK PRODUCTS	460
192	KAMERMAN LABS	383
193	KASCO SYSTEMS	482
194	KENSINGTON MICROWARE	58
195	KEYWORD OFFICE TECH.	257
22	KIMTRON	288
196	LA PLATA RESEARCH	324
197	LABORATORY MICROSYS.	18
198	LATTICE, INC.	162
199	LEADING EDGE PROD.	49
200	LEADING EDGE PROD.	355
201	LEVEL 5 RESEARCH	467
202	LINDE TECHNOLOGY INC.	407
203	LINTEK INC.	471
204	LIONHEART PRESS	356
205	LIVING VIDEOTEX	328
206	LOGICAL DEVICES	32
207	LOGICAL DEVICES	467
208	LOGITECH INC.	269
209	LOMAS DATA PRODUCTS	366
210	LYBEN COMP. SYS.	460
211	LYCO COMPUTER	387
*	MACMILLAN BOOK CLUBS	272, 273
214	MAGNUM PC	270
215	MANX SOFTWARE SYS.	54
216	MANX SOFTWARE SYS.	55
217	MARK WILLIAMS CO.	75
218	MARYMAC INDUSTRIES	467
219	MASTERBYTE COMP. OF N.Y.	403
220	MAXELL DATA PRODUCTS	51
221	MAYNARD ELECTRONICS	64
*	MCGRAW-HILL CES	321
405	MEGATEL	268
224	MERRITT COMP. PRODUCTS	460
407	META SYSTEM INC.	486
225	MFJ ENTERPRISES INC.	235
226	MICRO AGE COMP. STORES INC.	251
228	MICRO DATA BASE SYS.	243
227	MICRO DATA BASE SYS.	358, 359
229	MICRO DESIGN INT'L.	207
230	MICRO MART, INC.	72, 73
231	MICRO PRODUCTS, INC.	447
232	MICRO TASK	86
233	MICROCOMPUTER ACCESSORIES	313
234	MICROMINT INC.	406
235	MICROPRO INT'L.	12, 13
236	MICROPROCESSORS UNLTD.	460
*	MICRORIM INC.	121
237	MICROSHOP	455
238	MICROSHOP	455
*	MICROSOFT CORP.	225
*	MICROSOFT CORP.	302, 303
239	MICROTIME	4
240	MICROWAY	147
49	MICTRO	439
241	MIDWEST MICRO-PERIPHERALS	108
242	MIMIC SYSTEMS INC.	231
*	MINORITY INDUSTRIES	34
243	MITCHELL MANAGEMENT SYS.	236
*	MODTECH INTERNATIONAL	360
244	MODULA SYS. CORP.	30
245	MOTEL COMPUTERS LTD.	467
246	MOUNTAIN VIEW PRESS	261
247	MTI SYSTEMS CORP.	52
248	MULTI-TECH SYSTEMS	24
249	N.B.S.	67
250	NAT'L. PUBLIC DOMAIN SFTW.	486
251	NATIONAL COMPUTER GRAPHIC	166
252	NATIONAL INSTRUMENTS	161
*	NAVAL UNDERWATER SYS. CTR.	392
409	NCDA	471
254	NEC HOME ELECTR. USA	129
255	NEC INFORMATION SYS.	CIII
256	NETWORX INC.	263
257	NEW STAR SOFTWARE	94
258	NIBBLE NOTCH COMP. PROD.	91
259	NICOLET PARATRONICS	52
261	NORTH HILLS CORP.	467
260	NORTH HILLS CORP.	482
*	NRI SCHOOLS ELECTR. DIV.	385
262	OPEN SYSTEMS/UCCEL	17
263	ORCHID TECHNOLOGY	233
265	ORION INSTRUMENTS	416
378	ORYX SYSTEMS	432, 433
379	ORYX SYSTEMS	432, 433
380	ORYX SYSTEMS	432, 433
267	PC. HORIZONS	482
268	PACIFIC EXCHANGES	322, 351, 460, 462
269	PANASONIC	213
270	PANASONIC SENIOR PARTNER	131
271	PARAGON COURSEWARE	404
272	PC NETWORK	164, 165
273	PC PIPELINE	486
274	PE SYSTEMS	92
402	PERKIN-ELMER	239
275	PERITEK CORP.	149
377	PERSOFT INC.	82
276	PIPELINE COMPUTER	472, 473
277	POCKET TECHNOLOGY	347
*	POLAROID CORP.	88
279	POLAROID CORP.	89
280	PRIME FINANCIAL ANALYSIS	258
281	PRINCETON GRAPHIC SYS.	80, 81

TO GET FURTHER information on the products advertised in BYTE, either pick up your touch-tone telephone and use AIMS or fill out the reader service card. Either way full instructions are provided following this reader service index which is provided as an additional service by the publisher, who assumes no liability for errors or omissions. *Correspond directly with company.

Inquiry No.		Page No.
282	PRIORITY ONE	362
283	PROGRAMMERS SHOP	364
284	PROGRESSIVE MICRO DISTR.	478, 479
285	PROMETHEUS PRODUCTS	333
286	PROMETHEUS PRODUCTS	199
287	PROTECTO ENTERPR.	194, 195
289	PURPLE COMPUTING	462
290	QIC RESEARCH	336
291	QUARK INCORPORATED	127
292	QUBIE DISTRIBUTING	159
293	QUBIE DISTRIBUTING	247
294	QUELO	462
295	QUESTIONAIRE SERVICE CO.	486
*	RACAL-VADIC	378, 379
296	RADIO SHACK	CIV
297	RAIMA CORP.	162
298	RAINBOW TECH INC.	351
299	RCA	69
301	RELAX TECHNOLOGY	221
302	RICKERDATA	189
303	ROGERS LABS	30
304	ROGERS LABS	30
305	ROLAND CORP.	375
306	S. C. DIGITAL	388
307	S-100 DIV. 696 CORP.	476, 477
308	S-100 DIV. 696 CORP.	476, 477
309	SAB-LINK, INC.	471
310	SAFEWARE	351
311	SATELLITE SOFTWARE	7
312	SAV-ON COMPUTERS	474, 475
390	SCIENTIFIC RESEARCH	434
*	SCOTTSDALE SYSTEMS	95
313	SEEQUA COMP. CORP.	8
314	SEMIDISK SYSTEMS	341
315	SHAPE MAGNETRONICS	310
316	SHARP ELECTRONICS	123
317	SHEPHERD MARKETING	382
*	SILICON SPECIALTIES	384
*	SILVER FOX	267
318	SLICER COMPUTERS	174
*	SOFTCRAFT	381
*	SOFTLINE CORP.	87
322	SOFTWARE SERVICES	382
323	SOFTWARE SOLUTIONS INC.	342, 343
324	SOLUTIONWARE CORP.	471
325	SOURCE TELECOMP. CORP.	117
327	SPEAR SECURITIES	371
328	SPECTRUM SOFTWARE	115
329	STANDARD MICROSYS. CORP.	143
330	STARBUCK DATA CO.	460
331	STRAWBERRY TREE COMP.	372
332	STRIDE MICRO	150
333	STRIDE MICRO	151
336	SUMMIT SOFTWARE TECHN. INC.	380
406	SUNNY INT'L.	454
337	SUNTRONICS CO. INC.	452
338	SUPER COMPUTER INC.	344
339	SUPERSOFT	274
340	SYNALTA SYSTEMS	486
*	SYSGEN INC.	241
342	SYSTAT INC.	125
343	SYSTEMS MANAGMNT. ASSOC.	139
*	SYSTEMS STRATEGIES	90
344	TALLGRASS TECH.	62, 63
345	TAPE WORLD	382
346	TATUM LABS	462
347	TDI SYSTEMS, INC.	370
411	TEKTRONIX INC.	377
348	TELEBYTE TECHNOLOGY INC.	437
349	TELETEK ENTERPRISES, INC.	43
*	TELEVIDEO SYSTEMS	325
*	TEXAS INSTRUMENTS	389
350	THREE M COMPANY	314, 315
127	TIGERTRONICS	467
*	TINNEY, ROBERT GRAPHICS	357
351	TOSHIBA AMERICA INC.	279
352	TRANSTECTOR SYSTEMS INC.	297
354	U.S. ROBOTICS	176, 177
355	UNIFIED SOFTWARE SYS.	482
356	UNISOURCE	61
357	UNIVERSAL DATA SYS.	45
358	UNLIMITED PERIPHERALS	486
359	UNLIMITED PROCESSING INC.	400
360	VAULT CORP.	169
361	VEN-TEL INC.	311
362	VIA WEST	282
363	VICTORY ENT. TECHNOLOGY	68
364	VIDEO DYNAMICS INC.	471
365	VIDEX	27
*	VLM COMPUTER ELECTR.	324
366	VOTRAX, INC.	196
367	WADSWORTH PROF. SFTW.	182
368	WALLING COMPANY	462
*	WAREHOUSE DATA PRODUCTS	365
369	WESTERN AUTOMATION LABS.	130
370	WESTERN VIDEO	419
371	WINTEK CORP.	409
372	WINTEK CORP.	460
373	WORKMAN & ASSOCIATES	462
374	Z-SOFT	31
375	ZSTEM COMMUNICATIONS DIV.	462

* *Correspond directly with company.*

INTERNATIONAL ADVERTISING SECTION

501	AMERICAN BUYING & EXPORT	32C
*	BYTE	32B
502	CASIO COMPUTER CO.	32A
503	HIGH TECH. ELECTRONICS	32D

No domestic inquiries, please.

AIMS SUBSCRIBERS ONLY!

Use BYTE'S Automated Inquiry Management System
Available 24 Hours, 7 Days a Week

GET PREPARED

1) Write your Subscriber Number, as printed on your Subscriber I.D. Card, in boxes in Step 4 below. (Do not add 0's to fill in blank boxes)
2) Write numbers for information desired in boxes in Step 6b below. (Do not add 0's to fill in blank boxes.)

CALL AIMS

3) Now, on a Touch-Tone telephone dial: **(413) 442-2668** and wait for voice commands.

ENTER YOUR SUBSCRIBER AND ISSUE NUMBERS

4) When AIMS says: "Enter Subscriber Number"
(Enter by pushing the numbers and symbols [# or * enclosed in the boxes] on telephone pad ignoring blank boxes)
Enter ☐☐☐☐☐☐☐☐[#][#]
5) When AIMS says "Enter magazine code & issue code"
Enter [1][#][1][5][#][#]

ENTER YOUR INQUIRIES

6a) When AIMS says "Enter (next) Inquiry Number"
Enter one inquiry selection from below (ignore blank boxes)
b) Repeat 6a as needed (maximum 17 inquiry numbers)

1. ☐☐☐[#][#]
2. ☐☐☐[#][#]
3. ☐☐☐[#][#]
4. ☐☐☐[#][#]
5. ☐☐☐[#][#]
6. ☐☐☐[#][#]
7. ☐☐☐[#][#]
8. ☐☐☐[#][#]
9. ☐☐☐[#][#]
10. ☐☐☐[#][#]
11. ☐☐☐[#][#]
12. ☐☐☐[#][#]
13. ☐☐☐[#][#]
14. ☐☐☐[#][#]
15. ☐☐☐[#][#]
16. ☐☐☐[#][#]
17. ☐☐☐[#][#]

END SESSION

7) End session by entering [*][*][9][1][#][#]
8) Hang up after hearing final message

If you are a subscriber and need assistance, call (603) 924-9281.

If you are not a subscriber fill out the subscription card found in this issue or, call BYTE Circulation 800-258-5485.

NO OTHER LETTER-QUALITY PRINTER CAN TOUCH OUR NEW SPINWRITER FOR SPEED AND EASE-OF-USE.



CHANGE FORMS LENGTH AT THE PRESS OF A BUTTON.

Introducing the Spinwriter 8850.

Our newest, and fastest, Spinwriter® printer operates at over 550 words-per-minute. And is extraordinarily easy to operate.

For one thing the Spinwriter 8850 takes care of basic settings such as pitch and forms length automatically. Of course you can also change either one at the touch of a button. It also has a unique control panel. With large, legible alphanumeric LED's to indicate the specific operating status. And make it simple for even an unfamiliar operator to use.

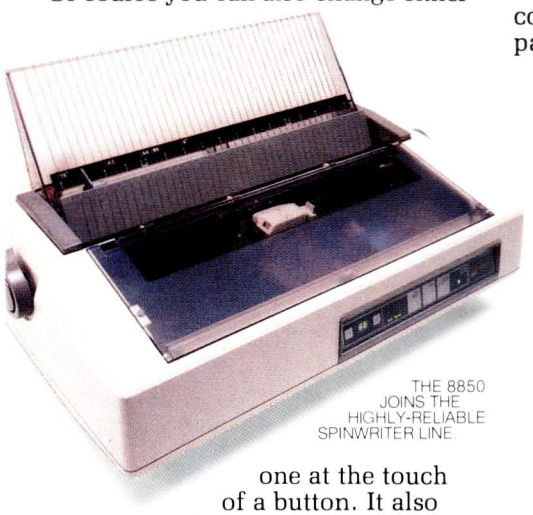

THE 8850 JOINS THE HIGHLY-RELIABLE SPINWRITER LINE.



UNIQUE LED DISPLAY TELLS USER EVERYTHING FROM THE FACT THAT PAPER IS OUT



TO THE FACT THE COVER IS OPEN.

And, of course, the 8850 has all the features, quality and reliability that make a Spinwriter a Spinwriter.

The first choice of IBM PC users.

The Spinwriter printer was the first totally plug compatible letter-quality printer available for the IBM® PC. It's still one of the few that works with all IBM PC software, as well as all other popular packages. You'll notice even its looks are compatible.

Spinwriter printers also give you capabilities you won't find on other printers. Like a selection of 80 different print styles.

And, nine easily installed forms handling options that can accelerate your printed output even more. Spinwriter printers also have an enviable record for reliability.

In fact, several years without a failure is not unusual. No wonder there are more Spinwriter printers hooked up to IBM PC's than any other letter-quality printer.

How to get up to speed.

For more information on the Spinwriter 8850 or our two companion models, just call NEC Information Systems at: 1-800-343-4419; in Massachusetts call (617)264-8635. Also available at: Entre, 1-800-HI ENTRE: Sears Business System Centers, 1-800-228-2200; and Computerland stores, (In California) 1-800-321-1101; (Outside California) 1-800-423-3008. Find out why more and more IBM PC users are saying, "NEC and me."

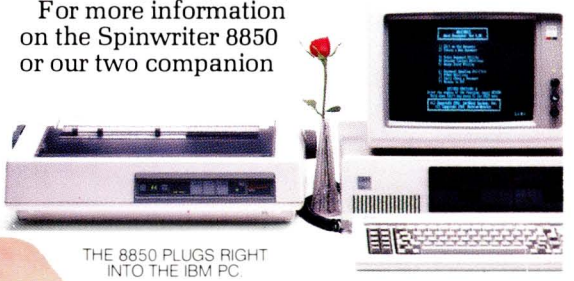

THE 8850 PLUGS RIGHT INTO THE IBM PC.

NEC AND ME



NEC Information Systems, Inc.
1414 Mass. Ave.
Dept. 1610
Boxborough, MA
01719

Spinwriter is a registered trademark of NEC Corp. IBM is a registered trademark of International Business Machines Corp.

Inquiry 255

TANDY... Clearly Superior™

Our new Tandy 1000 puts it all together for less... including DeskMate™ disk software.

We've put it all together. The new Advanced Technology Tandy 1000 comes equipped with everything you need for personal computing—including multi-function user disk software.

We put word processing, spreadsheet analysis, electronic filing, telecommunications, a calendar and electronic mail all on one disk. We call it DeskMate™. And it's included with every Tandy 1000.

The Tandy 1000 also lets you choose from programs like Lotus 1-2-3, the pfs:series, dBASE II and more.

And unlike IBM's PC, the Tandy 1000 includes adapters to use a monitor, printer, joysticks and light pen, plus "extras" like DOS and BASIC.

DeskMate software, easy user expansion and superb graphics make the Tandy 1000 clearly superior. It's the best $2000 personal computer you can buy . . . for only $1199.

Available at over 1200 Radio Shack Computer Centers and at Participating Radio Shack Stores and Dealers

Radio Shack®
COMPUTER CENTERS
A DIVISION OF TANDY CORPORATION
Inquiry 296

Price does not include monitor and second disk drive and applies at Radio Shack Computer Centers and participating stores and dealers. IBM/Registered TM International Business Machines Corp. 1-2-3/TM Lotus Development Corp. pfs:/TM Software Publishing, Inc. dBASE II/TM Ashton-Tate, Inc.

