

JVC


SERVICE MANUAL

COLOR MONITOR

BASIC CHASSIS

FV4

TM-2001U

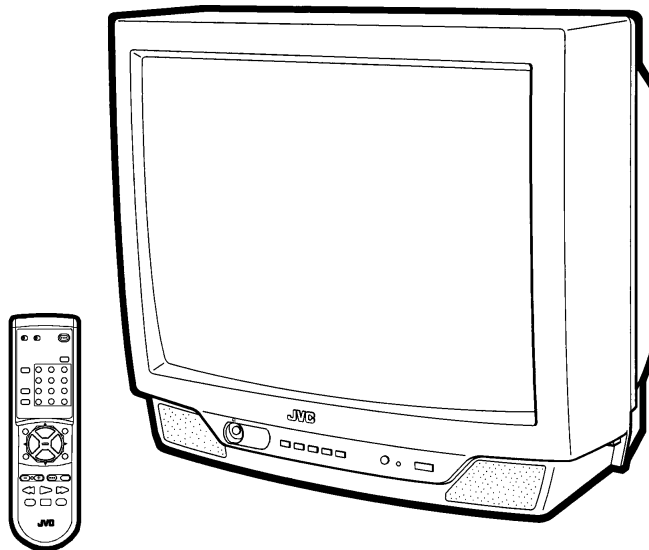

CONTENTS

| | |
|---------------------------------------|-----|
| ■ SPECIFICATIONS | 2 |
| ★ OPERATING INSTRUCTIONS | 1-1 |
| ■ SAFETY PRECAUTIONS | 3 |
| ■ FEATURES | 4 |
| ■ SPECIFIC SERVICE INSTRUCTIONS | 4 |
| ■ SERVICE ADJUSTMENTS | 8 |
| ★ STANDARD CIRCUIT DIAGRAM | 2-1 |
| ■ PARTS LIST | 23 |

SPECIFICATIONS

| Items | Content |
|--|---|
| Dimensions (W x H x D) | 19-7/8" x 17-7/8" x 19-1/2" / 50.3cm x 45.2cm x 49.3cm |
| Mass | 43.8 lbs / 19.9 kg |
| TV RF System | CCIR(M) |
| Color Sound System | NTSC, BTSC System (Multi Channel Sound) |
| TV Receiving Channels and Frequency VL Band VH Band UHF Band | (02~06) 54MHz~88MHz (07~13) 174MHz~216MHz (14~69) 470MHz~806MHz |
| CATV Receiving Channels and Frequency Low Band High Band Mid Band Super Band Hyper Band Ultra Band Sub Mid Band TV/CATV Total Channel | <div> (02~06, A-8) by (02~06&01) (07~13) by (07~13) (A~1) by (14~22) (J~W) by (23~36) (W+1~W+28) by (37~64) (W+29~W+84) by (65~125) (A8, A4~A1) by (01, 96~99) </div> <div>(54MHz~804MHz)</div> 180 Channels |
| Intermediate Frequency Video IF Carrier Sound IF Carrier Color Sub Carrier | 45.75MHz 41.25MHz (4.5MHz) 3.58MHz |
| Power Input Power Consumption | 120V AC, 60Hz 87W (US) / 1.4A (CA) |
| Picture Tube (Screen Size) High Voltage Speaker | 20" (51cm) Measured Diagonally 26.5kV ± 1kV (at zero beam current) 2" x 3-1/2" / 5 x 9cm Oval type x 2 |
| Audio Power Output | 1W+1W |
| Input Video Input Audio Input | BNC connector box (Adapter Box) : 1Vp-p, 75Ω bridge connection possible, Auto termination. (RCA input of the television : Connect the Video output cord of the BNC connector box. High impedance) 500mVrms (-4dBs) ,High Impedance (RCA pin jack) |
| Variable Audio Output | More then 0~1550mVrms(+6dBs) Low impedance (400Hz when modulated 100%) (RCA pin jack) |
| Headphone Jack | 3.5mm stereo mini jack (Sound is stereo) |
| Antenna Terminal | 75(VHF/UHF) Terminal, F-Type Connector |
| Remote Control Unit | RM-C307-1A (AA/R6/UM-3 battery x 2) |

Design & specifications are subject to change without notice.

SAFETY PRECAUTIONS

- The design of this product contains special hardware, many circuits and components specially for safety purposes. For continued protection, no changes should be made to the original design unless authorized in writing by the manufacturer. Replacement parts must be identical to those used in the original circuits. Service should be performed by qualified personnel only.
- Alterations of the design or circuitry of the products should not be made. Any design alterations or additions will void the manufacturer's warranty and will further relieve the manufacturer of responsibility for personal injury or property damage resulting therefrom.
- Many electrical and mechanical parts in the products have special safety-related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in the parts list of Service manual. **Electrical components having such features are identified by shading on the schematics and by (Δ) on the parts list in Service manual.** The use of a substitute replacement which does not have the same safety characteristics as the recommended replacement part shown in the parts list of Service manual may cause shock, fire, or other hazards.
- Use isolation transformer when hot chassis.**
The chassis and any sub-chassis contained in some products are connected to one side of the AC power line. An isolation transformer of adequate capacity should be inserted between the product and the AC power supply point while performing any service on some products when the HOT chassis is exposed.
- Don't short between the LIVE side ground and ISOLATED (NEUTRAL) side ground or EARTH side ground when repairing.**
Some model's power circuit is partly different in the GND. The difference of the GND is shown by the LIVE : (⊥) side GND, the ISOLATED(NEUTRAL) : (↘) side GND and EARTH : (⊕) side GND. Don't short between the LIVE side GND and ISOLATED(NEUTRAL) side GND or EARTH side GND and never measure with a measuring apparatus (oscilloscope etc.) the LIVE side GND and ISOLATED(NEUTRAL) side GND or EARTH side GND at the same time.
If above note will not be kept, a fuse or any parts will be broken.
- If any repair has been made to the chassis, it is recommended that the B1 setting should be checked or adjusted (See ADJUSTMENT OF B1 POWER SUPPLY).
- The high voltage applied to the picture tube must conform with that specified in Service manual. Excessive high voltage can cause an increase in X-Ray emission, arcing and possible component damage, therefore operation under excessive high voltage conditions should be kept to a minimum, or should be prevented. If severe arcing occurs, remove the AC power immediately and determine the cause by visual inspection (incorrect installation, cracked or melted high voltage harness, poor soldering, etc.). To maintain the proper minimum level of soft X-Ray emission, components in the high voltage circuitry including the picture tube must be the exact replacements or alternatives approved by the manufacturer of the complete product.
- Do not check high voltage by drawing an arc. Use a high voltage meter or a high voltage probe with a VTVM. Discharge the picture tube before attempting meter connection, by connecting a clip lead to the ground frame and connecting the other end of the lead through a 10kΩ 2W resistor to the anode button.
- When service is required, observe the original lead dress. Extra precaution should be given to assure correct lead dress in the high voltage circuit area. Where a short circuit has occurred, those components that indicate evidence of overheating should be replaced. Always use the manufacturer's replacement components.

10. Isolation Check

(Safety for Electrical Shock Hazard)

After re-assembling the product, always perform an isolation check on the exposed metal parts of the cabinet (antenna terminals, video/audio input and output terminals, Control knobs, metal cabinet, screwheads, earphone jack, control shafts, etc.) to be sure the product is safe to operate without danger of electrical shock.

(1) Dielectric Strength Test

The isolation between the AC primary circuit and all metal parts exposed to the user, particularly any exposed metal part having a return path to the chassis should withstand a voltage of 1100V AC (r.m.s.) for a period of one second.

(... Withstand a voltage of 1100V AC (r.m.s.) to an appliance rated up to 120V, and 3000V AC (r.m.s.) to an appliance rated 200V or more, for a period of one second.)

This method of test requires a test equipment not generally found in the service trade.


(2) Leakage Current Check

Plug the AC line cord directly into the AC outlet (do not use a line isolation transformer during this check.). Using a "Leakage Current Tester", measure the leakage current from each exposed metal part of the cabinet, particularly any exposed metal part having a return path to the chassis, to a known good earth ground (water pipe, etc.). Any leakage current must not exceed 0.5mA AC (r.m.s.).

However, in tropical area, this must not exceed 0.2mA AC (r.m.s.).

● Alternate Check Method

Plug the AC line cord directly into the AC outlet (do not use a line isolation transformer during this check.). Use an AC voltmeter having 1000 ohms per volt or more sensitivity in the following manner. Connect a 1500Ω 10W resistor paralleled by a 0.15μF AC-type capacitor between an exposed metal part and a known good earth ground (water pipe, etc.). Measure the AC voltage across the resistor with the AC voltmeter. Move the resistor connection to each exposed metal part, particularly any exposed metal part having a return path to the chassis, and measure the AC voltage across the resistor. Now, reverse the plug in the AC outlet and repeat each measurement. Any voltage measured must not exceed 0.75V AC (r.m.s.). This corresponds to 0.5mA AC (r.m.s.). However, in tropical area, this must not exceed 0.3V AC (r.m.s.). This corresponds to 0.2mA AC (r.m.s.).

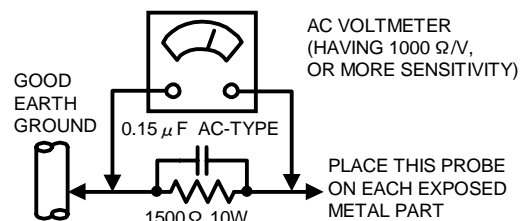

11. High voltage hold down circuit check.


After repair of the high voltage hold down circuit, this circuit shall be checked to operate correctly.

See item "How to check the high voltage hold down circuit".

This mark shows a fast operating fuse, the letters indicated below show the rating.



POWER CORD REPLACEMENT WARNING.
Connecting the white line side of power cord to "WHT" character side.



FEATURES

- New chassis design enables use of a single board with simplified circuitry.
- Provided with miniature tuner (TV/CATV).
- Multifunctional remote control permits picture adjustment.
- Adoption of the CHANNEL GUARD function prevents the specific channels from being selected, unless the "ID number" is key in.
- I²C bus control utilizes single chip ICs.
- Adoption of the VIDEO STATUS function.
- Adoption of the ON/OFF TIMER function.
- With 75 Ω V/U in common (F-Type) ANT Terminal.
- SLEEP TIMER for setting in real time.
- Closed-caption broadcasts can be viewed.
- Audio Video input terminal.
- Variable Audio output terminal.
- Built-in MTS system.

SPECIFIC SERVICE INSTRUCTIONS

DISASSEMBLY PROCEDURE

REMOVING THE REAR COVER

1. Unplug the power supply cord.
2. Remove the 5 screws marked (A) and 2 screws marked (B) as shown in Fig.1.
3. Withdraw the REAR COVER toward you.

[CAUTION]

- When reinstalling the rear cover, carefully push it inward after inserting the MAIN PWB into the rear cover groove.

REMOVING THE MAIN PW BOARD

- After removing the rear cover.
1. While holding both sides of the MAIN PWB, raise the MAIN PWB gently with due care, then, take off the PWB stopper marked (C) from the cabinet bottom.
 2. Pull out the MAIN PWB.
(If necessary, take off the wire clamp and connectors, etc.)

REMOVING THE SPEAKER

- After removing the MAIN PW board.
1. Remove the 2 screws marked (D) .

CHECKING THE MAIN PW BOARD

1. To check the back side of the MAIN PW Board.
 - 1) Pull out the MAIN PWB. (Refer to REMOVING THE MAIN PWB).
 - 2) Erect the MAIN PWB vertically so that you can easily check the back side of the MAIN PW Board.

[CAUTION]

- When erecting the MAIN PWB, be careful so that there will be no contacting with other PW Board.
- Before turning on power, make sure that the CRT earth wire and other connectors are properly connected.

WIRE CLAMPING AND CABLE TYING

1. Be sure clamp the wire.
2. Never remove the cable tie used for tying the wires together.
Should it be inadvertently removed, be sure to tie the wires with a new cable tie.

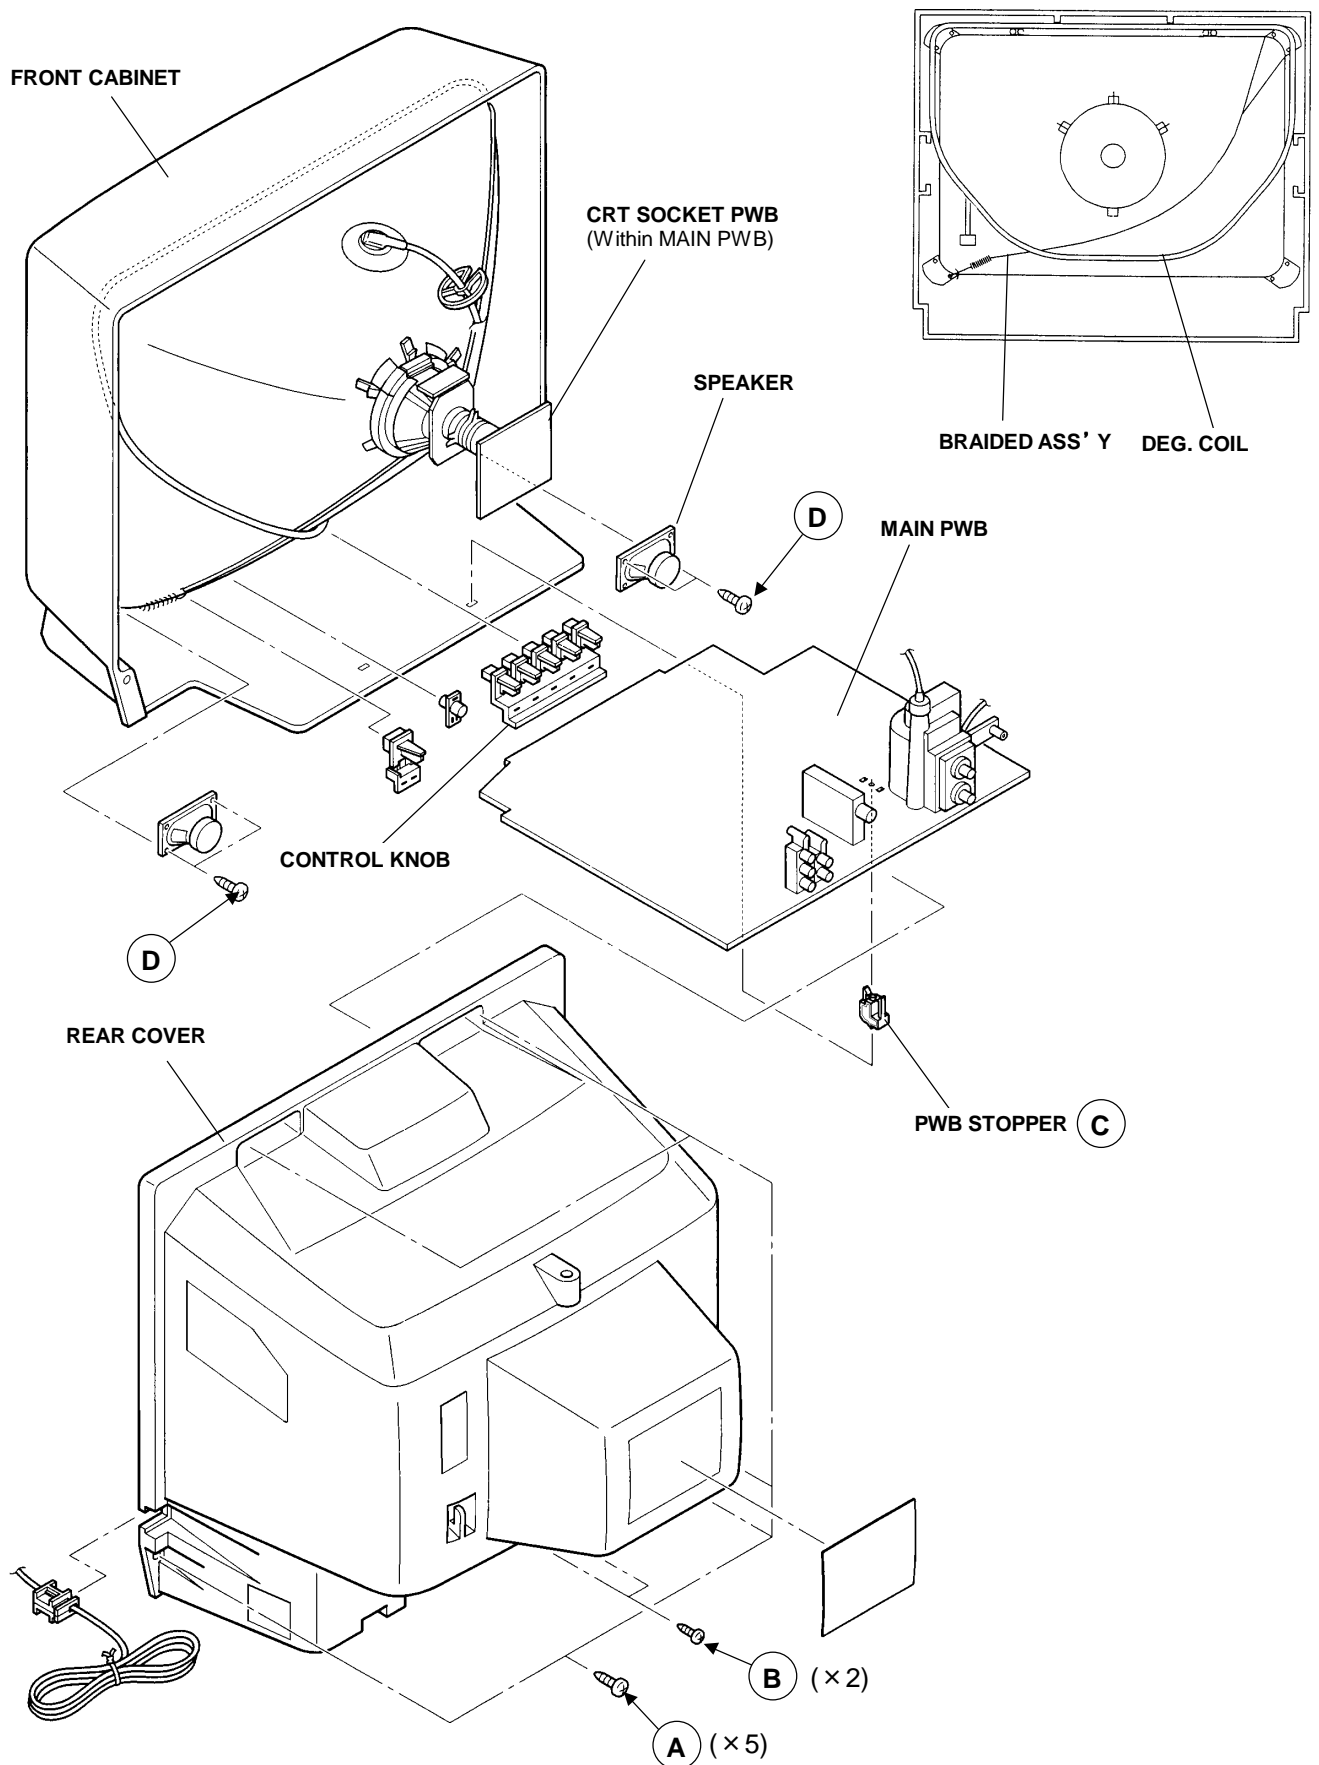


Fig.1

No.51889

MEMORY IC REPLACEMENT

1. Memory IC

This model use a memory IC.
This memory IC stores data for proper operation of the video and deflection circuits.
When replacing, be sure to use an IC containing this (initial value) data.

2. Memory IC replacement procedure

| Procedure | Screen display |
|--|--|
| <p>(1) Power off Switch off the power and disconnect the power cord from the outlet.</p> | |
| <p>(2) Replace the memory IC Initial value must be entered into the new IC.</p> | |
| <p>(3) Power on Connect the power cord to the outlet and switch on the power.</p> | |
| <p>(4) System constant check and setting 1) Press SLEEP TIMER key and, while the indication of "SLEEP TIMER 0 MIN." is being displayed, press DISPLAY key and VIDEO STATUS key on the remote control unit simultaneously. 2) The SERVICE MENU screen of Fig.1 is displayed. 3) While the SERVICE MENU is displayed, again simultaneously press the DISPLAY and VIDEO STATUS keys to display the Fig.2 SYSTEM CONSTANT screen. 4) Refer to the SYSTEM CONSTANT table and check the setting items. Where these differ, select the setting item with the MENU UP/DOWN key and adjust the setting with the MENU LEFT/RIGHT keys. (The letters of the selected item are displayed in yellow.) 5) After adjusting, release the MENU LEFT/RIGHT key to store the setting value. 6) Press the EXIT key twice to return the normal screen.</p> | <div><div>SERVICE MENU</div><div>PICTURE SOUND</div><div>GAME</div><div>LOW LIGHT HIGH LIGHT</div><div>RF AFC CHK</div><div>VCO(CW)</div><div>SELECT BY ▲▼ EXIT BY</div><div>OPERATE BY ◀▶ [EXIT]</div></div> <p>Fig.1</p> <div><div>SYSTEM CONSTANT</div><div>MODEL : ***** ←</div><div>V-CHIP : YES</div><div>CAN V-CHIP : YES</div><div>*****-*****</div><div>SELECT BY ▲▼ EXIT BY</div><div>OPERATE BY ◀▶ [EXIT]</div></div> <p>Fig.2</p> <p>Indicated Model No.</p> |
| <p>(5) Receive channel setting Refer to the OPERATING INSTRUCTIONS(USER'S GUIDE) and set the receive channels (Channels Preset) as described.</p> | |
| <p>(6) User settings Check the user setting items according to Table 2. Where these do not agree, refer to the OPERATING INSTRUCTIONS (USER'S GUIDE) and set the items as described.</p> | |
| <p>(7) SERVICE MENU setting Verify what to set in the SERVICE MENU, and set whatever is necessary.(Fig.1) Refer to the SERVICE ADJUSTMENT for setting.</p> | |

TABLE 1 (System Constant setting)

| Setting item | Setting content | Setting value |
|--------------|---|---------------|
| MODEL | Display the each application model | AV-20220/21 |
| V-CHIP | <div> <div>→ YES</div> <div>→ NO</div> </div> | YES |
| CAN V-CHIP | <div> <div>→ YES</div> <div>→ NO</div> </div> | YES |

TABLE 2 (User setting value)

| Setting item | Setting value |
|-------------------------------|-----------------------------|
| 1. Use remote controller keys | |
| POWER | OFF |
| CHANNEL | CH 02 |
| CHANNEL PRESET | See OPERATING INSTRUCTIONS. |
| VOLUME | 10 |
| INPUT (TV/VIDEO) | TV |
| DISPLAY | OFF |
| SLEEP TIMER | 0 |
| VIDEO STATUS | STANDARD |
| 2. Setting of MENU | |
| TINT | CENTER |
| COLOR | CENTER |
| PICTURE | CENTER |
| BRIGHT | CENTER |
| DETAIL | CENTER |
| BASS | CENTER |
| TREBLE | CENTER |
| BALANCE | CENTER |
| MTS | STEREO |
| TV SPEAKER | ON |
| NOISE MUTING | ON |
| SET VIDEO STATUS | ALL CENTER |
| SET CLOCK | Unnecessary to set |
| ON/OFF TIMER | NO |
| LANGUAGE | ENG |
| CLOSED CAPTION | OFF |
| BACKGROUND | BLACK |
| AUTO TUNER SETUP | TUNER MODE : AIR |
| CHANNEL SUMMARY | Unnecessary to set |
| V-CHIP | OFF |
| SET LOCK CODE | Unnecessary to set |

SERVICE ADJUSTMENTS

ADJUSTMENT PREPARATION:

- 1. You can make the necessary adjustments for this unit with either the Remote Control Unit or With the adjustment tools and parts as given below.
- 2. Adjustment with the Remote Control Unit is made on the basis of the initial setting values, however, the new setting values which set the screen to its optimum condition may differ from the initial settings.
- 3. Make sure that AC power is turned on correctly.
- 4. Turn on the power for set and test equipment before use, and start the adjustment procedures after waiting at least 30 minutes.
- 5. Unless otherwise specified, prepare the most suitable reception or input signal for adjustment.

- 6. Never touch any adjustment parts which are not specified in the list for this adjustment - variable resistors, transformers, condensers, etc.
- 7. Presetting before adjustment.
Unless otherwise specified in the adjustment instructions, preset the following functions with the remote control unit:

| | |
|----------------------------------|----------|
| VIDEO STATUS | STANDARD |
| BASS, TREBLE, BALANCE | CENTER |
| TINT/COLOR PICTURE/BRIGHT DETAIL | CENTER |


MEASURING INSTRUMENT

- 1. DC voltmeter (or digital voltmeter)
- 2. Oscilloscope
- 3. Signal generator (Pattern generator) [NTSC]
- 4. Remote control unit
- 5. TV audio multiplex signal generator.
- 6. Frequency counter

ADJUSTMENT ITEMS

| Adjustment items | Adjustment items | Adjustment items |
|-----------------------|----------------------------|-----------------------|
| B1 POWER SUPPLY check | WHITE BALANCE (Low Light) | MTS INPUT LEVEL check |
| IF VCO | WHITE BALANCE (High Light) | MTS STEREO VCO |
| RF. AGC | SUB BRIGHT | MTS SAP VCO |
| FOCUS | SUB CONTRAST | MTS FILTER check |
| V. SIZE | SUB COLOR | MTS SEPARATION |
| H. POSITION | SUB TINT | |

ADJUSTMENT LOCATIONS

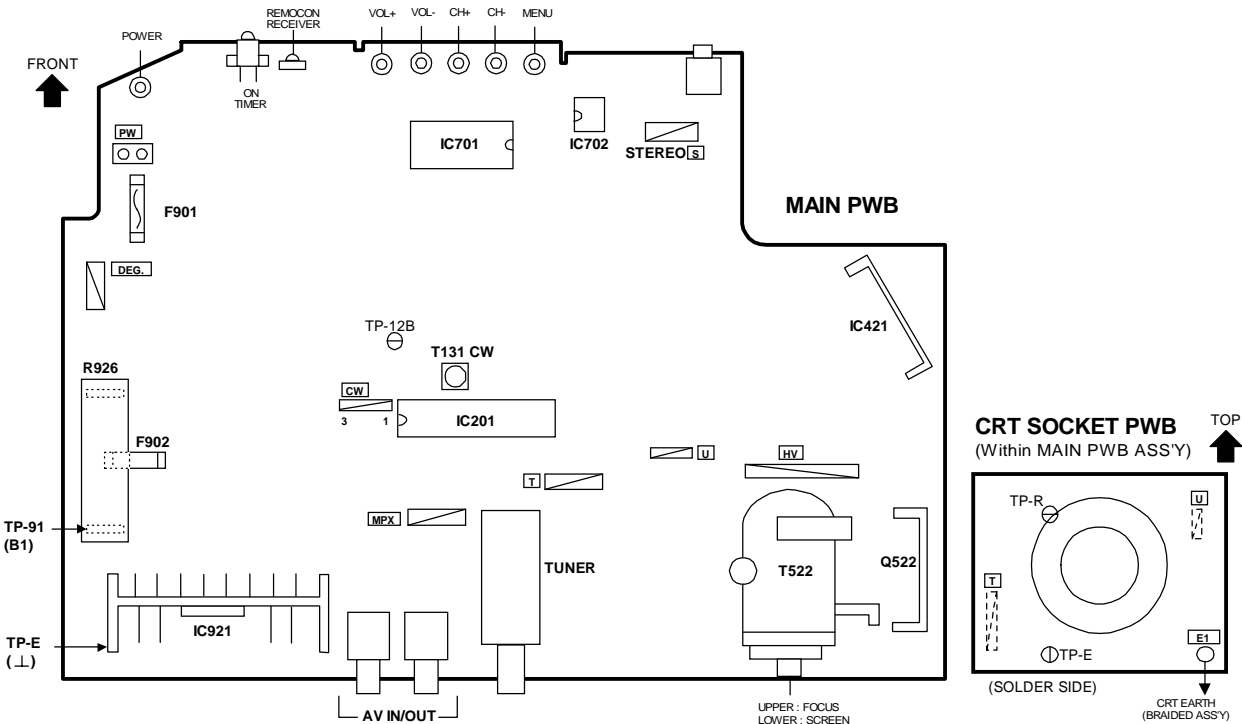

BASIC OPERATION SERVICE MENU

1. TOOL OF SERVICE MENU OPERATION

Operate the SERVICE MENU with the REMOTE CONTROL UNIT.

2. SERVICE MENU ITEMS

In general, basic setting(adjustments) items or verifications are performed in the SERVICE MENU.

- PICTURE This sets the setting values (adjustment values) of the VIDEO/CHROMA and DEFLECTION circuits.
- SOUND This sets the setting values (adjustment values) of the AUDIO circuit.
- GAME This is used when the GAME MODE is adjusted.
- LOW LIGHT This sets the setting values (adjustment values) of the WHITE BALANCE circuit.
- HIGH LIGHT This sets the setting values (adjustment values) of the WHITE BALANCE circuit.
- RF AFC CHK This is used when the IF VCO is adjusted. **[Do not adjust]**
- VCO (CW) This is used when the IF VCO is adjusted.

3. Basic Operations of the SERVICE MENU

(1) How to enter the SERVICE MENU.

Press **SLEEP TIMER** key and, while the indication of "SLEEP TIMER 0 MIN." is being displayed, press **DISPLAY** key and **VIDEO STATUS** key on the remote control unit simultaneously to enter the **SERVICE MENU** screen ① shown in the next figure page.

(2) SERVICE MENU screen selection

Press the UP / DOWN key of the MENU to select any of the following items.

(The letters of the selected items are displayed in yellow.)

- | | |
|--------------|--------------|
| ● PICTURE | ● SOUND |
| ● GAME | |
| ● LOW LIGHT | ● HIGH LIGHT |
| ● RF AFC CHK | |
| ● VCO(CW) | |


(3) Enter the any setting (adjustment) mode

● PICTURE and SOUND mode

- 1) If select any of PICTURE or SOUND items, and the LEFT / RIGHT key is pressed from SERVICE MENU (MAIN MENU), the screen ② will be displayed as shown in figure page later.
- 2) Then the UP / DOWN key is pressed, the PICTURE mode screen ③ or the SOUND mode screen ④ is displayed, and the PICTURE or SOUND setting can be performed.


● GAME, LOW LIGHT, HIGH LIGHT, RF AFC CHK and VCO (CW) mode

- 1) If select any of GAME / LOW LIGHT / HIGH LIGHT / RF AFC CHK / VCO (CW) items, and the LEFT / RIGHT key is pressed from SERVICE MENU (MAIN MENU), the screens ⑤ ⑥ ⑦ ⑧ ⑨ will be displayed as shown in the next figure page.
- 2) Then the settings or verifications can be performed.

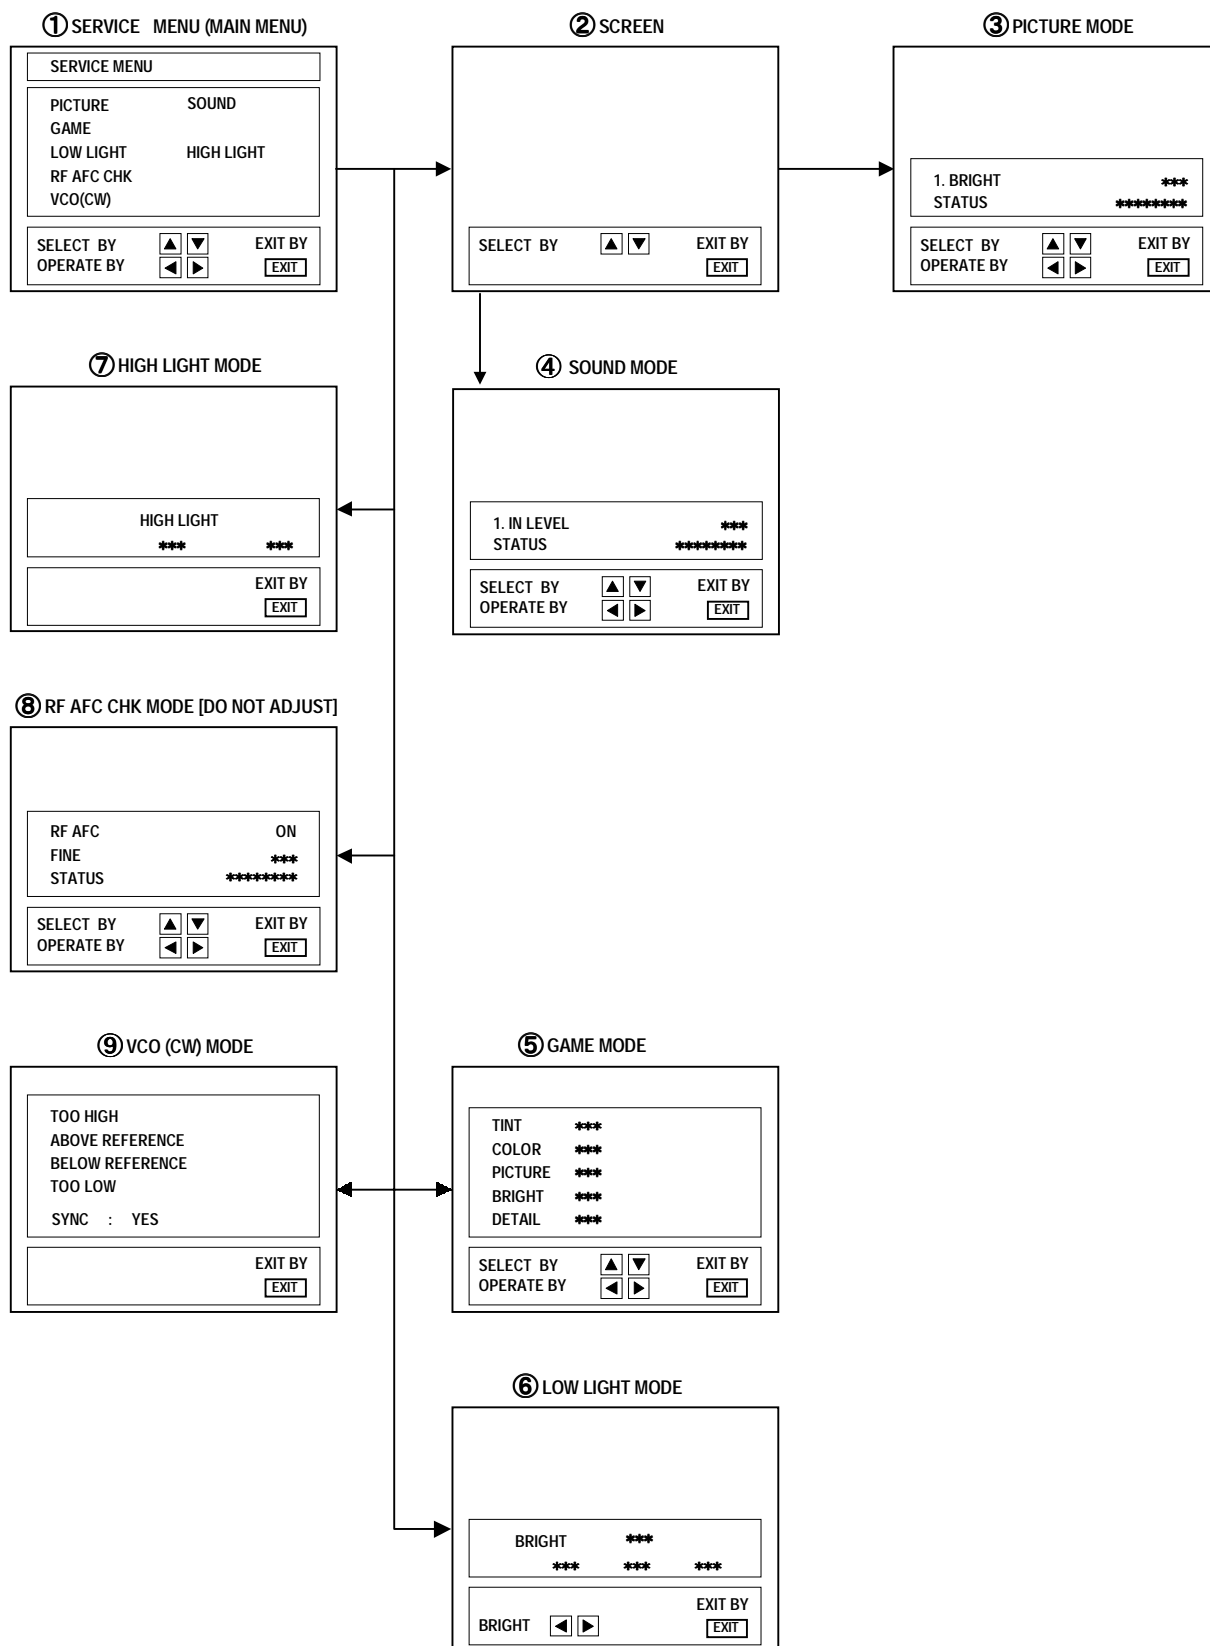

(4) Setting method



- 1) UP / DOWN key of the MENU
Select the SETTING ITEM.
- 2) LEFT / RIGHT key of the MENU
Setting(adjust) the SETTING VALUE of the SETTING ITEM.
When the key is released the SETTING VALUE will be stored (memorized).
- 3) EXIT key
Returns to the previous screen.

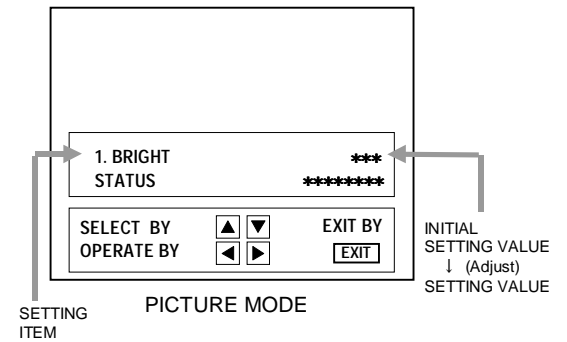**(5) Releasing SERVICE MENU**

- 1) After returning to the SERVICE MENU upon completion of the setting (adjustment) work, press the EXIT key again.

★ The settings for LOW LIGHT and HIGH LIGHT are described in the WHITE BALANCE page of ADJUSTMENT.

★ The setting for VCO(CW) are described in the IF VCO page of ADJUSTMENT.

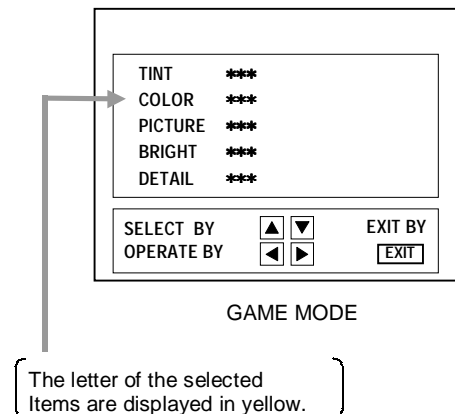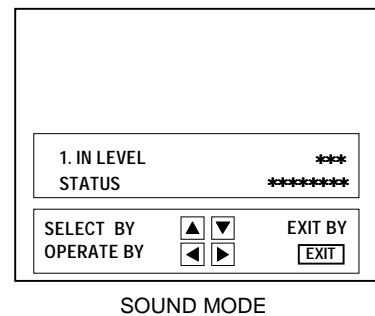

INITIAL SETTING VALUE OF SERVICE MENU

- Adjustment of the SERVICE MENU is made on the basis of the initial setting values; however, the new setting values which set the screen in its optimum condition may differ from the initial setting.
- Do not change the initial setting values of the setting (Adjustment) items not listed in "ADJUSTMENT".

● PICTURE MODE

- The four setting items in the video mode No.7 EXT BRI., No.8 EXT PIC., No.11 EXT TINT and No.12 EXT COL. are linked to the items in the TV MODE No.1 BRIGHT, No.2 PICTURE, No.5 TINT and No.6 COLOR, respectively. When the setting items in the TV mode are adjusted, the values in the setting items in the video mode are revised automatically to the same values in the TV mode.(The initial setting values given in () are off-set values.)
- When the four items (No.7, 8, 11 and 12) are adjusted in the video mode, the setting values in each item are revised independently.

| No. | Setting (Adjustment) items | Variable range | initial setting value |
|-----|----------------------------|----------------|-----------------------|
| 1. | BRIGHT | 0 ~ 127 | 64 |
| 2. | PICTURE | 0 ~ 127 | 95 |
| 3. | TV DTL(TV DETAIL) | 0 ~ 63 | 26 |
| 4. | TV BPF(TV B.P.FILTER) | 0 / 1 | 0 |
| 5. | TINT | 0 ~ 127 | 70 |
| 6. | COLOR | 0 ~ 127 | 48 |
| 7. | EXT BRI.(EXT.BRIGHT) | ±25 | (±0) |
| 8. | EXT PIC.(EXT.PICTURE) | ±25 | (±0) |
| 9. | EXT DTL(EXT.DETAIL) | 0 ~ 63 | 26 |
| 10. | EXT BPF(EXT.B.P.FILTER) | 0 / 1 | 0 |
| 11. | EXT TINT | ±25 | (+1) |
| 12. | EXT COL.(EXT.COLOR) | ±25 | (+3) |
| 13. | V SIZE | 0 ~ 63 | 38 |
| 14. | V CENT.(V.CENTER) | 0 ~ 7 | 0 |
| 15. | H POS.(H.POSITION) | 0 ~ 31 | 20 |
| 16. | OSD HP (OSD H POSITION) | 0 ~ 31 | 26 |
| 17. | OSD VP (OSD V POSITION) | 0 ~ 15 | 14 |
| 18. | H. AFC | 0 / 1 | 0 |
| 19. | RF AGC | 0 ~ 63 | 40 |
| 20. | OSC SEL | 0 / 1 | 0 |

● SOUND MODE

| No. | Setting (Adjustment) item | Variable range | Initial setting value |
|-----|---------------------------|----------------|-----------------------|
| 1. | IN LEVEL (INPUT LEVEL) | 0~63 | 29 |
| 2. | FH MON. (FM MONITOR) | 0 / 1 | 0 |
| 3. | ST VCO (STEREO VCO) | 0~63 | 20 |
| 4. | PILOT (PILOT CANCELER) | 0 / 1 | 0 |
| 5. | FILTER | 0~63 | 30 |
| 6. | LOW SEP. (LOW SEPARATION) | 0~63 | 23 |
| 7. | HI SEP. (HI SEPARATION) | 0~63 | 16 |
| 8. | 5FH MON. (5FH MONITOR) | 0 / 1 | 0 |
| 9. | SAP VCO | 0~63 | 14 |
| 10. | FIL. OFF. | ±10 | 0 |

● GAME MODE

| Setting (Adjustment) item | Variable range | Initial setting value |
|---------------------------|----------------|-----------------------|
| TINT | ± 20 | ± 0 |
| COLOR | ± 20 | ± 0 |
| PICTURE | ± 20 | -10 |
| BRIGHT | ± 20 | -5 |
| DETAIL | ± 15 | +5 |

● LOW LIGHT MODE

| Setting (Adjustment) item | Variable range | initial setting value |
|---------------------------|----------------|-----------------------|
| R CUTOFF | 0 ~ 255 | 20 |
| G CUTOFF | 0 ~ 255 | 20 |
| B CUTOFF | 0 ~ 255 | 20 |

● HIGH LIGHT MODE

| Setting (Adjustment) item | Variable range | initial setting value |
|---------------------------|----------------|-----------------------|
| G DRIVE | 0 ~ 255 | 128 |
| B DRIVE | 0 ~ 255 | 128 |

● RF AFC CHK MODE


| Setting (Adjustment) item | Variable range | initial setting value |
|---------------------------|----------------|--|
| RF AFC | ON / OFF | ON |
| FINE | -77 ~ +77 | $\pm \times \times$ (DO NOT ADJUST) |


■ ADJUSTMENTS




B1 POWER SUPPLY

| Item | Measuring instrument | Test point | Adjustment part | Description |
|--------------------------|----------------------|-----------------------|-----------------|--|
| Check of B1 POWER SUPPLY | DC Voltmeter | TP-91 (B1) TP-E(⊥) | | <ol style="list-style-type: none"> 1. Receive a black-and-white signal. 2. Connect the DC Voltmeter to TP-91 (B1) and TP-E(⊥). 3. Confirm that the voltage is DC134V +2V -2.5V. |

ADJUSTMENT OF VIDEO / DEF. CIRCUIT
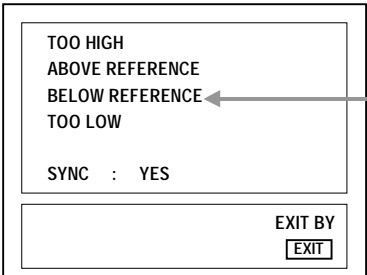
| Item | Measuring instrument | Test point | Adjustment part | Description |
|--------------------|----------------------|------------|-------------------------------------|--|
| IF VCO adjustment | Signal generator | | CW TRANSF. (T131) [VCO(CW)] MODE | <ul style="list-style-type: none"> ● Under normal conditions, no adjustment is required. <ol style="list-style-type: none"> 1. Receive a NTSC broadcast. (use channels without offset frequency). 2. Select the VCO(CW) mode from the SERVICE MENU. 3. Confirm the color change (yellow) from “TOO HIGH” to “TOO LOW” by CW TRANSF. and “SYNC : YES” being shown on the screen. Then, adjust CW TRANSF. until “BELOW REFERENCE” mark turns yellow and confirm again “ SYNC : YES” being shown on the screen. |
| | | | |  |
| RF. AGC adjustment | | | No.19 RF AGC | <ol style="list-style-type: none"> 1. Receive a color bar signal. 2. Select “No.19 RF AGC” of the PICTURE MODE. 3. Press the MUTING key and turn off color. 4. With the MENU LEFT key, get noise in the screen picture. (0 side of setting value) 5. Press the MENU RIGHT key and stop when noise disappears from the screen. 6. Change to other channels and make sure that there is no irregularity. 7. Press the MUTING key and get color out. |
| FOCUS adjustment | Signal generator | | FOCUS VR [In HVT] | <ol style="list-style-type: none"> 1. Receive a crosshatch signal. 2. While looking at the screen, adjust FOCUS VR so that the vertical and horizontal lines will be clear and in fine detail. 3. Make sure that the picture is in focus even when the screen gets darkened. |
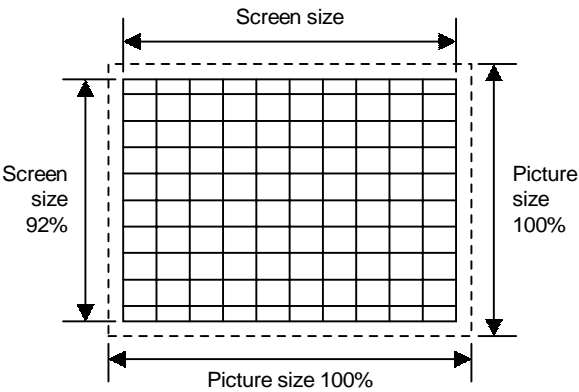
| Item | Measuring instruments | Test point | Adjustment part | Description |
|---|-------------------------|------------|---------------------|---|
| V.SIZE Adjustment | Signal generator | | No.13 V.SIZE | <ol style="list-style-type: none"> 1. Receive a crosshatch signal. 2. Select No.13 V SIZE in the PICTURE MODE. 3. Set the initial setting value of No.13 V SIZE with the LEFT / RIGHT key of the MENU. 4. Adjust No.13 V SIZE until the vertical screen size is 92%. |
|  | | | | |
| H.POSITION Adjustment | Signal generator | | No.15 H POS. | <ol style="list-style-type: none"> 1. Receive a crosshatch signal. 2. Select the No.15 H POS. of the PICTURE MODE. 3. Set the initial setting value of the No.15 H POS. with the LEFT / RIGHT key of the MENU. 4. Adjust the No.15 H POS. until the screen will be horizontally centered. |
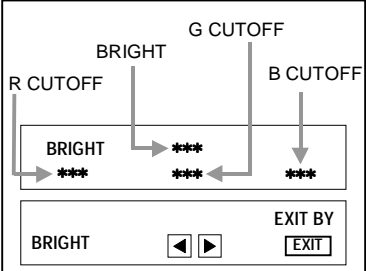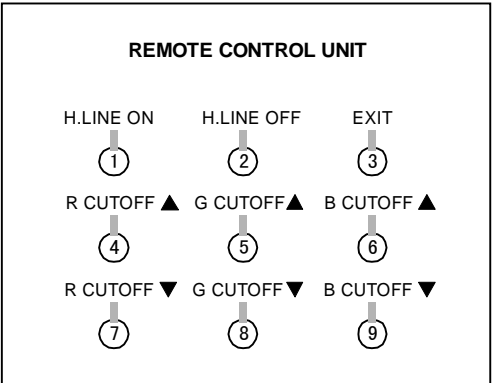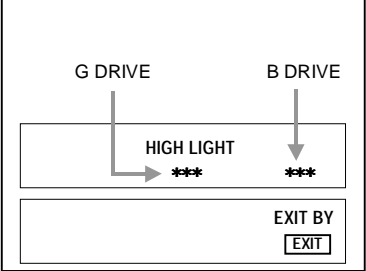
| Item | Measuring instruments | Test point | Adjustment part | Description |
|--|-----------------------|------------|--|--|
| WHITE BALANCE (Low Light) Adjustment | Signal generator | | BRIGHT R. CUTOFF G. CUTOFF B. CUTOFF SCREEN VR [In HVT] | <ol style="list-style-type: none"> 1. Receive a black-and-white signal.(Color off) 2. Select the [LOW LIGHT] MODE from the SERVICE MENU. 3. Set the initial setting value of BRIGHT with the LEFT / RIGHT key of the remote control unit. 4. Set the initial setting value of R CUTOFF, G CUTOFF and B CUTOFF with the ④ to ⑨ key of the remote control unit. 5. Display a single horizontal line by pressing the ①key of the remote control unit. 6. Turn the screen VR all the way to the left. 7. Turn the screen VR gradually to the right from the left until either one of the red, blue or green colors appears faintly. 8. Adjust the two colors which did not appear until the single horizontal line that is displayed becomes white using the ④ to ⑨ keys of the remote control unit. 9. Turn the screen VR to where the single horizontal line glows faintly. 10. Press the ② key to return to the regular screen. <p>* The ③ EXIT key is the cancel key for the WHITE BALANCE.</p> |
| | | | | <p>[LOW LIGHT] MODE</p>  <p>REMOTE CONTROL UNIT</p>  |
| WHITE BALANCE (High Light) Adjustment | Signal generator | | G. DRIVE B. DRIVE | <ol style="list-style-type: none"> 1. Receive a black-and-white signal. (Color off) 2. Select the [HIGH LIGHT] MODE in the SERVICE MENU. 3. Set the initial setting value of G DRIVE and B DRIVE with the ⑤, ⑥, ⑧ and ⑨ keys of the remote control unit. 4. Adjust the screen until it becomes white using the ⑤, ⑥, ⑧ and ⑨ keys of the remote control unit. <p>* The ③ (EXIT) key is the cancel key for the WHITE BALANCE.</p> |
| | | | | <p>[HIGH LIGHT] MODE</p>  <p>Remote Control Unit</p> <ul style="list-style-type: none"> ① key : H.LINE ON ② key : H.LINE OFF ③ key : EXIT ⑤ key : G DRIVE ▲ ⑥ key : B DRIVE ▲ ⑧ key : G DRIVE ▼ ⑨ key : B DRIVE ▼ |

| Item | Measuring instruments | Test point | Adjustment part | Description |
|--------------------------------|-----------------------|------------|---------------------|---|
| SUB BRIGHT Adjustment | | | No.1 BRIGHT | <ol style="list-style-type: none"> 1. Receive a broadcast. 2. Select No.1 BRIGHT of the PICTURE MODE. 3. Set the initial setting value of the No.1 BRIGHT with the LEFT / RIGHT key of the MENU. 4. If the brightness is not best with the initial setting value, make fine adjustment of the No.1 BRIGHT until you get the optimum brightness. |
| SUB CONTRAST Adjustment | | | No.2 PICTURE | <ol style="list-style-type: none"> 1. Receive a broadcast. 2. Select No.2 PICTURE of the PICTURE MODE. 3. Set the initial setting value of the No.2 PICTURE with the LEFT / RIGHT key of the MENU. 4. If the contrast is not best with the initial setting value, make fine adjustment of the No.2 PICTURE until you get the optimum contrast. |
| SUB COLOR Adjustment | | | No.6 COLOR | <ol style="list-style-type: none"> 1. Receive a broadcast. 2. Select No.6 COLOR of the PICTURE MODE. 3. Set the initial setting value of the No.6 COLOR with the LEFT / RIGHT key of the MENU. 4. If the color is not best with the initial setting value, make fine adjustment of the No.6 COLOR until you get the optimum color. |
| SUB TINT Adjustment | | | No.5 TINT | <ol style="list-style-type: none"> 1. Receive a broadcast. 2. Select No.5 TINT of the PICTURE MODE. 3. Set the initial setting value of the No.5 TINT with the LEFT / RIGHT key of the MENU. 4. If the tint is not best with the initial setting value, make fine adjustment of the No.5 TINT until you get the optimum tint. |

ADJUSTMENT OF MTS CIRCUIT

| Item | Measuring instrument | Test point | Adjustment part | Description |
|----------------------------------|---------------------------------------|-------------------|---|---|
| MTS INPUT LEVEL check | | | No.1 IN LEVEL | <ol style="list-style-type: none"> 1. Select the "No.1 IN LEVEL" of the SOUND MODE. 2. Verify that the "No.1 IN LEVEL" is set at its initial setting value. |
| MTS STEREO VCO adjustment | Signal generator Frequency counter | R OUT [AUDIO OUT] | No.2 FH MON. No.3 ST VCO | <ol style="list-style-type: none"> 1. Receive a RF signal (nonmodulated sound signal) from the antenna terminal. 2. Select the "No.2 FH MON." of SOUND MODE, and change the setting value from 0 to 1. 3. Connect the Frequency Counter to R OUT RCA pin of the AUDIO OUT. 4. Select the "No.3 ST VCO". 5. Set the initial setting value of the "No.3 ST VCO" with the LEFT/RIGHT key of the menu. 6. Adjust the "No.3 ST VCO" so that the Frequency Counter will display $15.73\text{kHz} \pm 0.1\text{kHz}$. 7. Select the "No.2 FH MON." of the SOUND MODE, and reset the setting value from 1 to 0. |

| Item | Measuring instrument | Test point | Adjustment part | Description |
|---------------------------|---|---|-----------------------------------|--|
| MTS SAP VCO adjustment | Signal generator Frequency counter | 【MPX】 Connector 【4】 pin SDA 【3】 pin GND R OUT [AUDIO OUT] | No.8 5FH MON. No.9 SAP VCO | <ol style="list-style-type: none"> 1. Receive a RF signal (non modulated sound signal) from the antenna terminal. 2. Connect between pin 【4】 of 【MPX】 connector and GND (Pin 【3】 of 【MPX】 connector) through 1MΩ Resistor. 3. Select the "No.8 5FH MON." of the SOUND MODE, and reset the setting value from 0 to 1. 4. Connect the Frequency Counter to R OUT RCA pin of the AUDIO OUT. 5. Select the "No.9 SAP VCO". 6. Set the initial setting value of "No.9 SAP VCO" with the LEFT/RIGHT key of the menu. 7. Adjust the "No.9 SAP VCO" so that the Frequency Counter will display 78.67kHz\pm0.5kHz. 8. Select the "No.8 5FH MON." of the SOUND MODE, and reset the setting value from 1 to 0. |
| MTS FILTER check | | | No.5 FILTER | <ol style="list-style-type: none"> 1. Select the "No.5 FILTER" of the SOUND MODE. 2. Verify that the "No.5 FILTER" is set at its initial setting value. |
| MTS SEPARATION adjustment | TV audio multiplex signal generator Oscilloscope | L OUT R OUT [AUDIO OUT] | No.6 LOW SEP. No.7 HI SEP. | <ol style="list-style-type: none"> 1. Input a stereo L signal (300Hz) from the TV audio multiplex signal generator to the antenna terminal. 2. Connect an oscilloscope to L OUT RCA pin of the AUDIO OUT, and display one cycle portion of the 300Hz signal. 3. Change the connection of the oscilloscope to R OUT RCA pin of the AUDIO OUT, and enlarge the voltage axis. 4. Select the "No.6 LOW SEP." of the SOUND MODE. 5. Set the initial setting value of the "No.6 LOW SEP." with the LEFT/RIGHT key of the menu. 6. Adjust the "No.6 LOW SEP." so that the stroke element of the 300Hz signal will become minimum. 7. Change the signal to 3kHz, and similarly adjust the "No.7 HI SEP." |

L-Channel signal waveform

R-Channel crosstalk portion


1 cycle

Minimum

PURITY, CONVERGENCE

PURITY ADJUSTMENT

1. Demagnetize CRT with the demagnetizer.
2. Loosen the retainer screw of the deflection yoke.
3. Remove the wedges.
4. Input a green raster signal from the signal generator, and turn the screen to green raster.
5. Move the deflection yoke backward.
6. Bring the long lug of the purity magnets on the short lug and position them horizontally. (Fig.2)
7. Adjust the gap between two lugs so that the GREEN RASTER will come into the center of the screen. (Fig.3)
8. Move the deflection yoke forward, and fix the position of the deflection yoke so that the whole screen will become green.
9. Insert the wedge to the top side of the deflection yoke so that it will not move.
10. Input a crosshatch signal.
11. Verify that the screen is horizontal.
12. Input red and blue raster signals, and make sure that purity is properly adjusted.

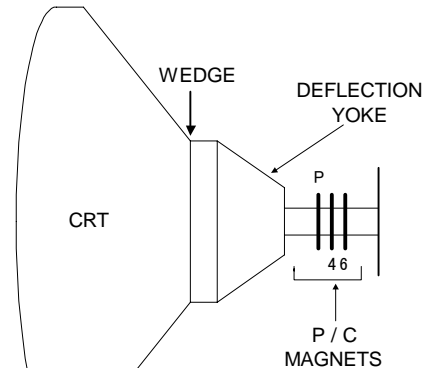

• P/C MAGNETS

P : PURITY MAGNET
 4 : 4 POLES (convergence magnets)
 6 : 6 POLES (convergence magnets)

Fig.1

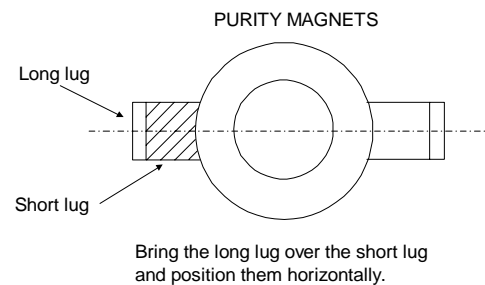


Fig.2

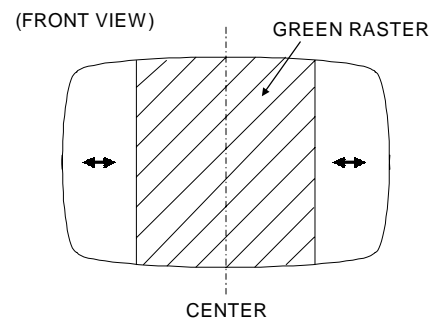


Fig.3

STATIC CONVERGENCE ADJUSTMENT

1. Input a crosshatch signal.
2. Using 4-pole convergence magnets, overlap the red and blue lines in the center of the screen (Fig.1) and turn them to magenta (red/blue).
3. Using 6-pole convergence magnets, overlap the magenta(red/blue) and green lines in the center of the screen and turn them to white.
4. Repeat 2 and 3 above, and make best convergence.

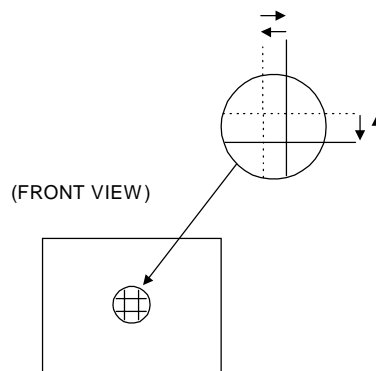


Fig.1

DYNAMIC CONVERGENCE ADJUSTMENT

1. Move the deflection yoke up and down and overlap the lines in the periphery. (Fig. 2)
2. Move the deflection yoke left to right and overlap the lines in the periphery. (Fig. 3)
3. Repeat 1 and 2 above, and make best convergence.

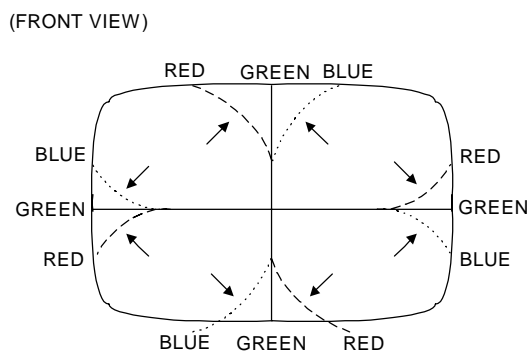


Fig.2

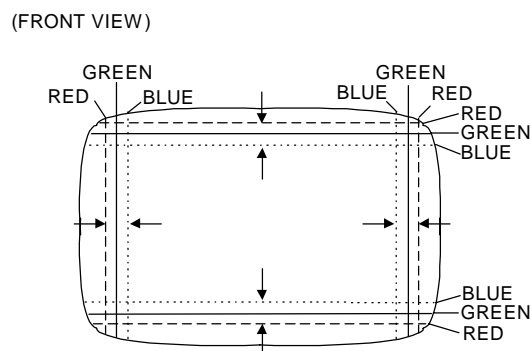


Fig.3

- After adjustment, fix the wedge at the original position.
Fasten the retainer screw of the deflection yoke.
Fix the 6 magnets with glue.

HOW TO CHECK THE HIGH VOLTAGE HOLD DOWN CIRCUIT

1. HIGH VOLTAGE HOLD DOWN CIRCUIT

After repairing the high voltage hold down circuit shown in Fig. 1.
This circuit shall be checked to operate correctly.

2. CHECKING OF THE HIGH VOLTAGE HOLD DOWN CIRCUIT

- (1) Turn the POWER SW ON.
- (2) As shown in Fig. 1, set the resistor (between ☐ X connector ☐ 1 & ☐ 3).
- (3) Make sure that the screen picture disappears.
- (4) Temporarily unplug the power cord.
- (5) Remove the resistor (between ☐ X connector ☐ 1 & ☐ 3).
- (6) Again plug the power cord, make sure that the normal picture is displayed on the screen.

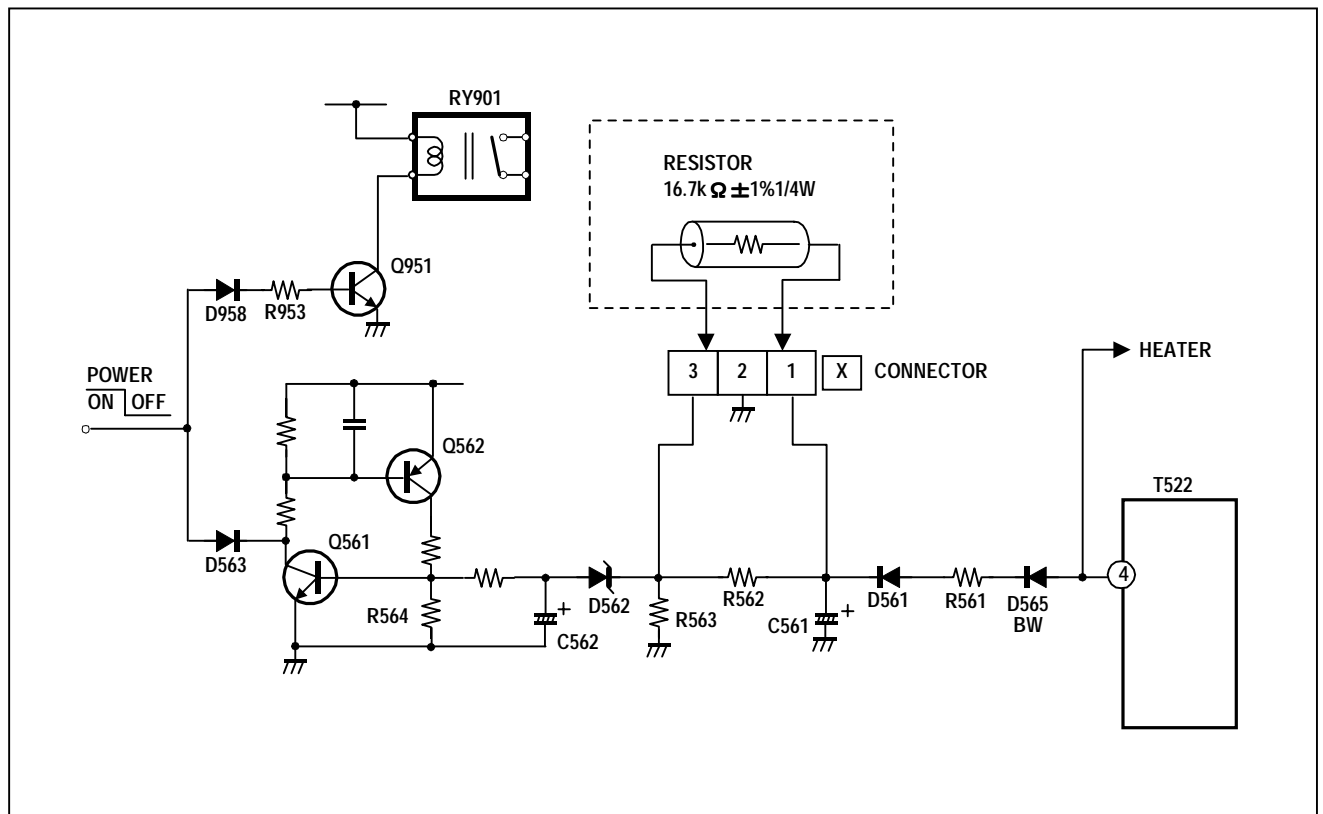


Fig. 1

SELF CHECK FUNCTIONS

1. Outline

This model has self check functions given below. When a malfunction has been detected, the POWER is turned off and the LED flashes to inform of the failure. The malfunction is detected by the signal input state of the control line connected to the microcomputer.

2. Self check items

| Check item | Details of detection | Method of detection | State of malfunction |
|--|---|---|---|
| CRT NECK protector (Also detected if the power supply line output from the HVT (High voltage Transformer) has shorted with the ground.) | When the vertical circuit S-correction capacitor C427 is shorted, detect the potential drop of the C427, and prevent the burn damage to the CRT NECK. (Grounding of shorting of the power supply output from the HVT to the vertical circuit, and the small signal power supply is also detected.) | The microcomputer detects at 1 second intervals. If NG is detected for more than 1 ms, a malfunction is interpreted. | When a malfunction has been detected, the POWER is turned off. While the POWER is being turned off, the power key of the remote controller is not operational until the power cord is taken out and put in again. |

3. Self check indicating function


The self-check function begins detection about 5 seconds after power is supplied.

In the event a malfunction is detected, the power is cut off immediately.

At this time, the ON-TIMER LED flashes to inform of the malfunction.

[ON-TIMER LED indication]

The ON-TIMER LED flashes at 0.5 seconds intervals.

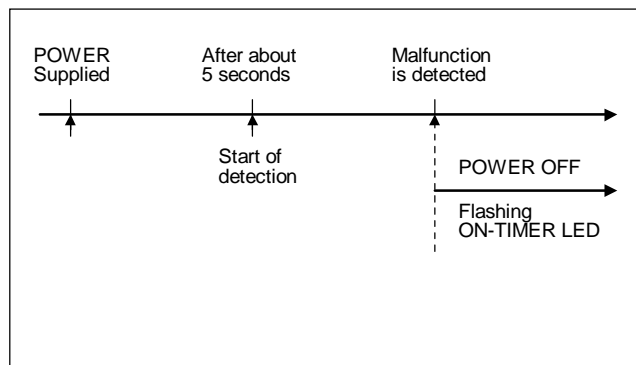

JVC SERVICE & ENGINEERING COMPANY OF AMERICA

DIVISION OF JVC AMERICAS CORP.

| | | |
|----------------------|---|---------------|
| Head office : | 1700 Valley Road, Wayne, New Jersey 07470 | (973)315-5000 |
| East Coast : | 10 New Maple Avenue, Pine Brook, New Jersey 07058 | (973)396-1000 |
| Midwest : | 705 Enterprise St. Aurora, Illinois 60504 | (630)851-7855 |
| West Coast : | 5665 Corporate Avenue, Cypress, California 90630 | (714)229-8011 |
| Southwest : | 10700 Hammerly, Suite 105, Houston, Texas 77043 | (713)935-9331 |
| Hawaii : | 2969 Mapunapuna Place, Honolulu, Hawaii 96819 | (808)833-5828 |
| Southeast : | 1500 Lakes Parkway, Lawrenceville, Georgia 30243 | (770)339-2582 |

JVC CANADA INC.

| | | |
|----------------------|--|---------------|
| Head office : | 21 Finchdene Square Scarborough, Ontario M1X 1A7 | (416)293-1311 |
| Vancouver : | 13040 Worster Court Richmond B.C. V6V 2B3 | (604)270-1311 |

JVC®