


JVC

SERVICE MANUAL

COMPACT VHS CAMCORDER

GR-SXM26EA/46EA /260A-S/460A-S/760A-S



S VHS VHS
625 PAL
Super VHS
Super VHS ET

Regarding service information other than these sections, refer to the GR-SXM26EG, SXM46EG service manual (No. 86543). Also, be sure to note important safety precautions provided in the service manual.

SPECIFICATIONS *(The specifications shown pertain specifically to the model GR-SXM26EA/46EA)*

Camcorder	
General	
Format	: S-VHS/VHS PAL standard
Power source	: DC 6.0 V ---
Power consumption	
LCD monitor* off, viewfinder on	: 4.2 W
LCD monitor* on, viewfinder off	: 4.6 W
LCD monitor* on, viewfinder on	: 5.2 W
Video light*	: 3.0 W
Signal system	: PAL-type
Video recording system	
Luminance	: FM recording
Colour	: Converted sub-carrier direct recording Conforms to VHS standard
Cassette	: S VHS VHS cassette
Tape speed	
SP	: 23.39 mm/sec.
LP	: 11.70 mm/sec.
Recording time (max.)	
SP	: 60 minutes
LP	: 120 minutes (with EC-60 cassette)
Operating temperature	: 0°C to 40°C
Operating humidity	: 35% to 80%
Storage temperature	: -20°C to 50°C
Weight	: Approx. 980 g (GR-SXM46EA) Approx. 970 g (GR-SXM26EA)
Dimensions (W x H x D)	: 198 mm x 119 mm x 99 mm (with the LCD monitor* closed and with the viewfinder fully tilted downward)
Pickup	: 1/4" format CCD
Lens	: F1.6, f = 3.9 mm to 62.4 mm, 16:1 power zoom lens with auto iris and macro control, filter diameter 40.5 mm
Viewfinder	: Electronic viewfinder with 0.5" black/white CRT
White balance adjustment	: Auto/Manual adjustment
LCD monitor	: 3" diagonally measured, LCD panel/TFT active matrix system (GR-SXM46EA) 2.5" diagonally measured, LCD panel/TFT active matrix system (GR-SXM26EA)
Speaker	: Monaural

Connectors

JLIP	: ø3.5 mm, 4-pole, mini-head jack (compatible with RC-5325 plug)
Video	: 1 V (p-p), 75 Ω unbalanced, analogue output (via Video output connector)
Audio	: 300 mV (rms), 1 k Ω analogue output (via Audio output connector)
S-Video	: Y : 1 V (p-p), 75 Ω , analogue output C : 0.29 V (p-p), 75 Ω , analogue output

AC Power Adapter/Charger AA-V16EA

Power requirement	: AC 110 V to 240 V $\sim$, 50 Hz/60 Hz
Power consumption	: 23 W
Output	
Charge	: DC 8.5 V --- , 1.3 A
VTR	: DC 6.3 V --- , 1.8 A
Charging system	: Constant current, peak detection, timer controlled
Dimensions (W x H x D)	: 125 mm x 42 mm x 68 mm
Weight	: Approx. 270 g

Cassette Adapter C-P7U

Dimensions (W x H x D)	: 188 mm x 25 mm x 104 mm
Weight	: Approx. 240 g
Accessory	: "R6 (AA)"-size battery x 1

Optional Accessories

- Battery Packs BN-V12U, BN-V20U, BN-V856U
- Car Battery Charger BH-V3E
- Compact S-VHS (**S VHS**) Cassettes SE-C45/30
- Compact VHS (**VHS**) Cassettes EC-60/45/30
- Remote Control Unit RM-V700U
- Active Carrying Bag CB-V7U

Some accessories are not available in some areas. Please consult your nearest JVC dealer for details on accessories and their availability.

Specifications shown are for SP mode unless otherwise indicated.
E & O.E. Design and specifications subject to change without notice.

TABLE OF CONTENTS

DIFFERENT TABLE	1 to 3
4. CHARTS AND DIAGRAMS	
4.1 BOARD INTERCONNECTIONS	4-1
4.2 CPU SCHEMATIC DIAGRAM	4-3
4.3 JACK SCHEMATIC DIAGRAM	4-5
4.4 OPERATION UNIT SCHEMATIC DIAGRAM (SXM760)	4-6
4.5 CAMERA DSP SCHEMATIC DIAGRAM	4-7
4.6 DSC SCHEMATIC DIAGRAM (SXM760)	4-9
5. PARTS LIST	
5.1 PACKING ASSEMBLY <M1>	5-1
5.2 ELECTRICAL PARTS LIST	
MAIN BOARD ASSEMBLY <01>	5-3

The following table indicate main different points between models GR-SXM26EG, SXM26EA, SXM260A-S, SXM46EG, SXM46EA, SXM460A-S and GR-SXM760A-S.

ITEM \ MODEL	GR-SXM26EG	GR-SXM26EA	GR-SXM260A-S	GR-SXM46EG	GR-SXM46EA	GR-SXM460A-S	GR-SXM760A-S
AC POWER ADAPTER	AA-V16EG	AA-V16EA	AA-V16AS	AA-V16EG	AA-V16EA	AA-V16AS	←
BATTERY PACK	BN-V11U	BN-V20U	BN-V11U	←	BN-V20U	BN-V11U	←
BODY COLOR	Pearl gray	Metallic gray	←	Light gold	←	Metallic gray	←
CASS. ADAPTER ASSY	Optional	Provided	←	Optional	Provided	←	←
CONNECTOR, CABLE ADAPTER	Provided	Optional	←	Provided	Optional	←	←
CONVERSION PLUG	Optional	←	Provided	Optional	←	Provided	←
DSC	Not used	←	←	←	←	←	Used
LCD MONITOR	2.5inch	←	←	3inch	←	←	←
PC CONNECTION CABLE	Optional	←	←	←	←	←	Provided
SNAP SHOT	Not used	←	←	Used	←	←	←
TAPE SPEED	SP	SP/LP	←	SP	SP/LP	←	←
ZOOM	50X	←	450X	160X	450X	←	←

Note: Mark ← is same as left.

The following table indicate different parts number between models GR-SXM26EG, SXM26EA, SXM260A-S, SXM46EG, SXM46EA, SXM460A-S and GR-SXM760A-S.

PACKING ASSEMBLY<M1> Note: As for IB (INSTRUCTIONS), refer to sec. 5.

REF NO.	ITEM \ MODEL	GR-SXM26EG	GR-SXM26EA	GR-SXM260A-S	GR-SXM46EG	GR-SXM46EA	GR-SXM460A-S	GR-SXM760A-S
2	PACKING CASE	LY31143-011A	LY31561-030A	LY31561-042A	LY31143-012A	LY31561-033A	LY31561-040A	LY31143-019A
3	CUSHION	LY31184-001A	LY31563-001A	←	LY31184-001A	LY31563-001A	←	LY31184-001A
4	POLY BAG	QPA02003506	QPA02003006	←	QPA02003506	QPA02003006	←	←
7	WARRANTY CARD	BT-54013-1	BT-56001-2	—	BT-54013-1	BT-56001-2	—	—
9	SHEET (MINITEL)	PU36564	—	—	PU36564	—	—	—
13	CONNECTOR, CABLE ADAPTER	PEMC1000-01-02	—	—	PEMC1000-01-02	—	—	—
15	CABLE ASSY (EDITING)	—	—	—	PEAC0428-150	←	←	←
16	REMOTE CONTROLLER	—	—	—	LY42129-001A	LY20543-002A	←	←
17	BATTERY, RCU, R03 (AAA)X2	Not used	←	←	Used	←	←	←
18	SHEET (C. FILTER)	LYT0486-015A	—	—	LYT0486-015A	—	—	—
19	SER. NET CARD	—	BT-56002-2	—	—	BT-56002-2	—	—
20	CASS. ADAPTER ASSY	—	YQ31963A-3 or YQ31963B-3	←	—	YQ31963A-3 or YQ31963B-3	←	←
21	BATTERY, CASS. ADAPTER, R6(AA)	Not used	Used	←	Not used	Used	←	←
△ 22	CONVERSION PLUG	—	—	PEMC1012	—	—	PEMC1012	←
△ 24	SHEET (INSTALL)	—	—	—	—	—	—	LYT0309-004A
△ 25	SOFT WARE PERM.	—	—	—	—	—	—	YU30843-4
26	PC CONNECTION CABLE	—	—	—	—	—	—	QAM0084-001
27	CD ROM ASSY	—	—	—	—	—	—	LY31133-001B
28	POLY BAG	—	—	—	—	—	—	LY30023-010A

FINAL ASSEMBLY <M2>

REF NO.	ITEM \ MODEL	GR-SXM26EG	GR-SXM26EA	GR-SXM260A-S	GR-SXM46EG	GR-SXM46EA	GR-SXM460A-S	GR-SXM760A-S
△ 101	LOWER CASE ASSY	LY10122-036A	LY10122-036B	←	LY10122-037A	LY10122-037B	←	←
△ 106	FRONT COVER ASSY	LY10124-043A	LY10124-058A	LY10124-046A	LY10124-045A	LY10124-055B	LY10124-046A	←
107	CASS. COVER(M) ASSY	LY10131-020A	LY10131-026A	LY10131-027B	LY10131-021A	LY10131-028C	LY10131-027B	←
108	UPPER CASE (M)	LY10133-002C	LY10133-007A	←	LY10133-008A	←	LY10133-007A	←
110	TOP COVER	LY10129-081A	LY10129-099A	LY10129-0A7A	LY10129-084A	LY10129-0A3B	LY10129-0A6A	LY10129-0A2A
113	OPERATION UNIT	LY10120-037A	LY10120-051A	←	LY10120-040A	LY10120-053B	LY10120-051A	LY10120-052A

– OPTICAL BLOCK SECTION –

REF NO.	ITEM \ MODEL	GR-SXM26EG	GR-SXM46EG	GR-SXM26EA/46EA	GR-SXM260A-S/460A-S/760A-S
255	OP LPF	LY41370-001A	←	←	LY41755-001A
256	CCD SPACER	LY20086-001A	←	←	LY20346-001A

Note: Mark — is not used. Mark ← is same as left.

MECHANISM ASSEMBLY <M3>

REF NO.	ITEM \ MODEL	GR-SXM26EG	GR-SXM46EG	GR-SXM26EA/46EA/260A-S /460A-S/760A-S
468	DRUM ASSY	YDV2094A	←	YDV2095A

MONITOR ASSEMBLY <M5>

REF NO.	ITEM \ MODEL	GR-SXM26EG	GR-SXM26EA	GR-SXM260A-S	GR-SXM46EG	GR-SXM46EA	GR-SXM460A-S	GR-SXM760A-S
△ 500	MONITOR ASSY	LYH20126-005A	LYH20126-016A	LYH20126-021A	LYH20126-006A	LYH20126-017A	LYH20126-020A	LYH20126-018A
△ 501	UPPER CASE (MONI) ASSY	LY20331-001C	←	←	LY20404-001C	←	←	←
502	COVER (MONI) ASSY	LY20482-005A	LY20482-013B	LY20482-014A	LY20482-006A	LY20482-016A	LY20482-014A	LY20482-003A
502A	WINDOW	LY31295-005A	LY31295-011A	←	LY31295-006A	←	LY31295-011A	LY31295-003A
503	COVER (U. HINGE)	LY20333-004A	LY20333-005A	←	LY20333-007A	←	LY20333-005A	←
513	BACK LIGHT	QLL0054-003	←	←	QLL0074-001	←	←	←
514	LCD MODULE	QLD0082-001	←	←	QLD0118-001	←	←	←

MAIN BOARD ASSEMBLY <01>

REF NO.	ITEM \ MODEL	GR-SXM26EG	GR-SXM26EA/260A-S	GR-SXM46EG	GR-SXM46EA/460A-S	GR-SXM760A-S
PW	MAIN BOARD ASSY	YB10271EB-04	YB10271EH-04	YB10271EC-04	YB10271EJ-04	YB10271ES-04

MONITOR BOARD ASSEMBLY <07>


REF NO.	ITEM \ MODEL	GR-SXM26EG	GR-SXM26EA/260A-S	GR-SXM46EG	GR-SXM46EA/460A-S /760A-S
PW	MONITOR ASSY	YB20868C	←	YB20868D	←
Q7605	TRANSISTOR	-	-	DTA144EE	←
Q7608	TRANSISTOR	2SC4617/QR/-X	←	-	-
Q7609	TRANSISTOR	2SA1774/QR/-X	←	-	-
Q7610	TRANSISTOR	-	-	DTC144WE	←
R7639	MG RESISTOR	NRSA63J-103X	←	NRSA63J-472X	←
R7646	MG RESISTOR	NRSA63J-103X	←	-	-
R7647	MG RESISTOR	NRSA63J-222X	←	-	-
R7651	MG RESISTOR	-	-	NRSA63J-223X	←
R7652	MG RESISTOR	-	-	NRSA63J-223X	←
R7653	MG RESISTOR	-	-	NRSA63J-223X	←
R7654	MG RESISTOR	-	-	NRSA63J-223X	←
R7655	MG RESISTOR	NRSA63J-0R0X	←	-	-
R7656	MG RESISTOR	-	-	NRSA63J-0R0X	←
R7657	MG RESISTOR	NRSA63J-0R0X	←	-	-
R7658	MG RESISTOR	-	-	NRSA63J-0R0X	←
C7659	CAPACITOR	-	-	NCB31CK-104X	←
L7610	COIL	NQL144K-220X	←	-	-
L7613	COIL	-	-	NQL144K-220X	←

Note: Mark - is not used.

Mark ← is same as left.

CHARTS AND DIAGRAMS


4.1 BOARD INTERCONNECTIONS

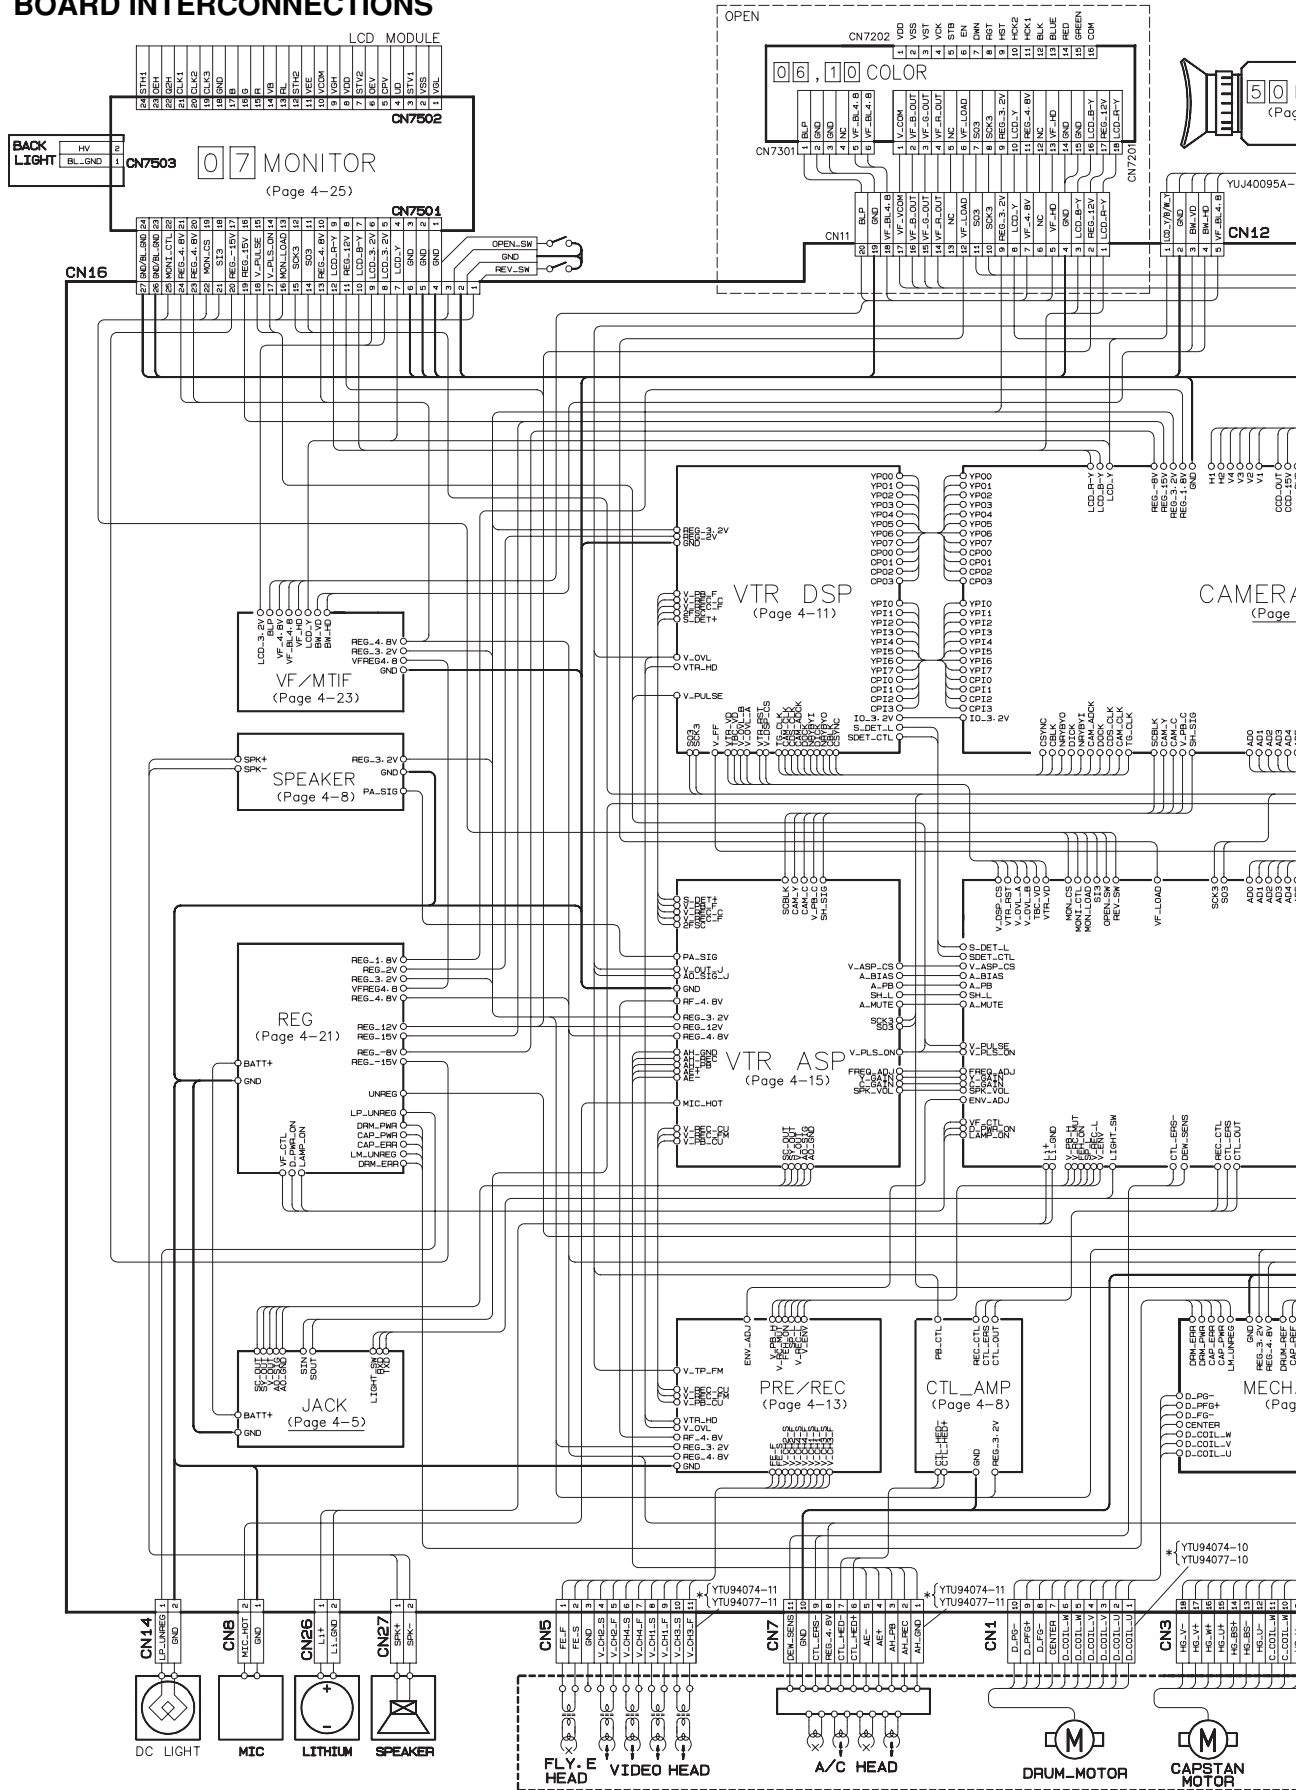

TO CPU (Page 4-3): ***Refer to this service manual***




4.2 CPU SCHEMATIC DIAGRAM

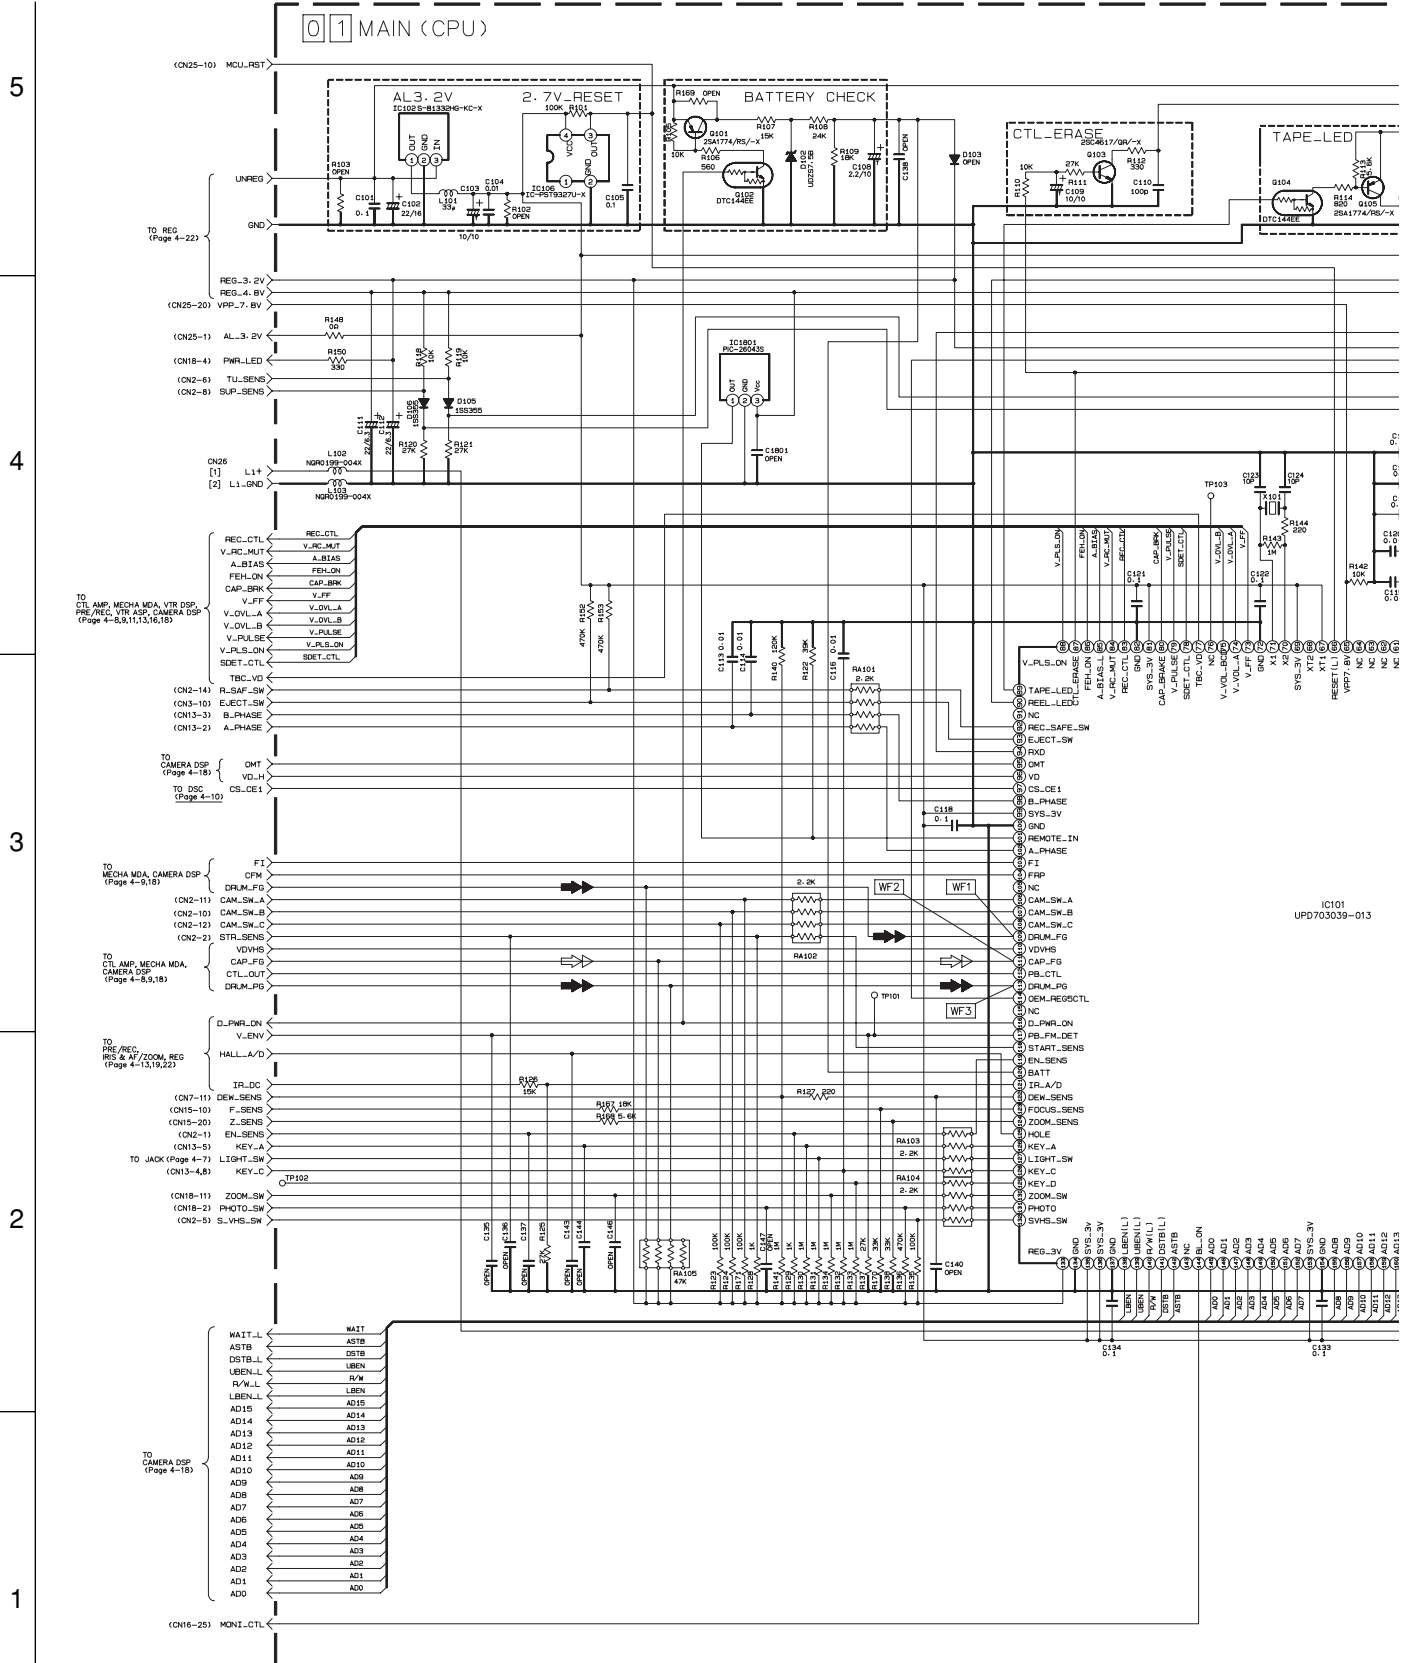




4.3 JACK SCHEMATIC DIAGRAM

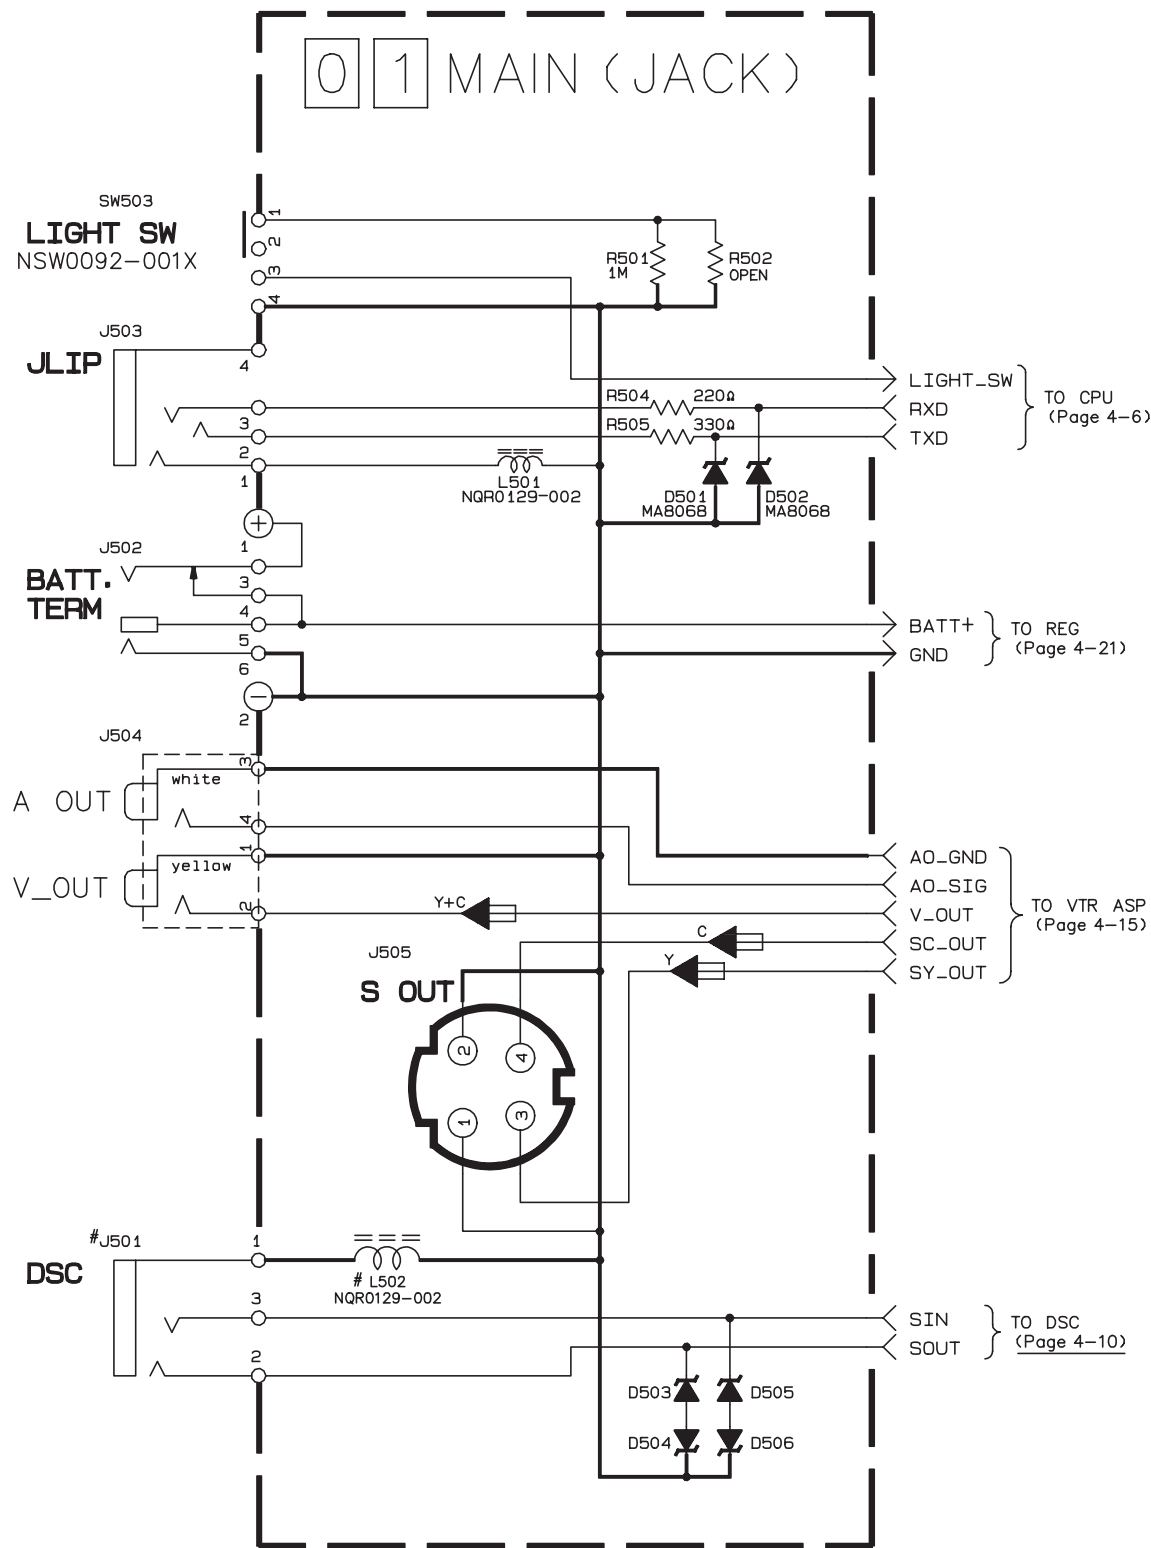

NOTE : COMPARISON CHART OF MODELS & MARKS (#) .


MODELS \ REF. NO	L502	J501
GR-SXM26/46/260/460	OPEN	OPEN
GR-SXM760	USED	USED

4.4 OPERATION UNIT SCHEMATIC DIAGRAM (SXM760)

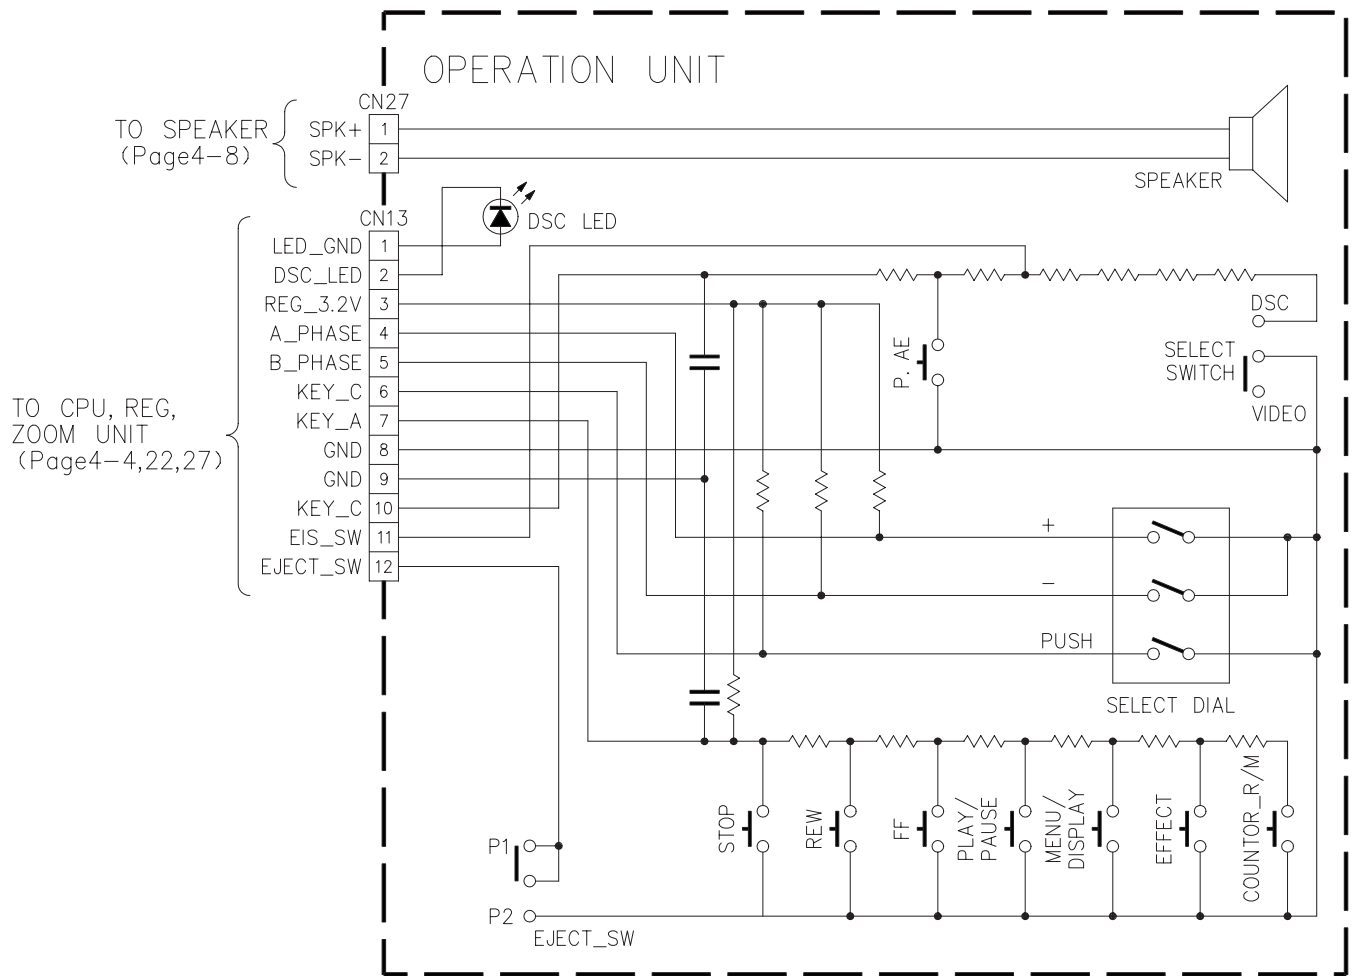

1

4-7

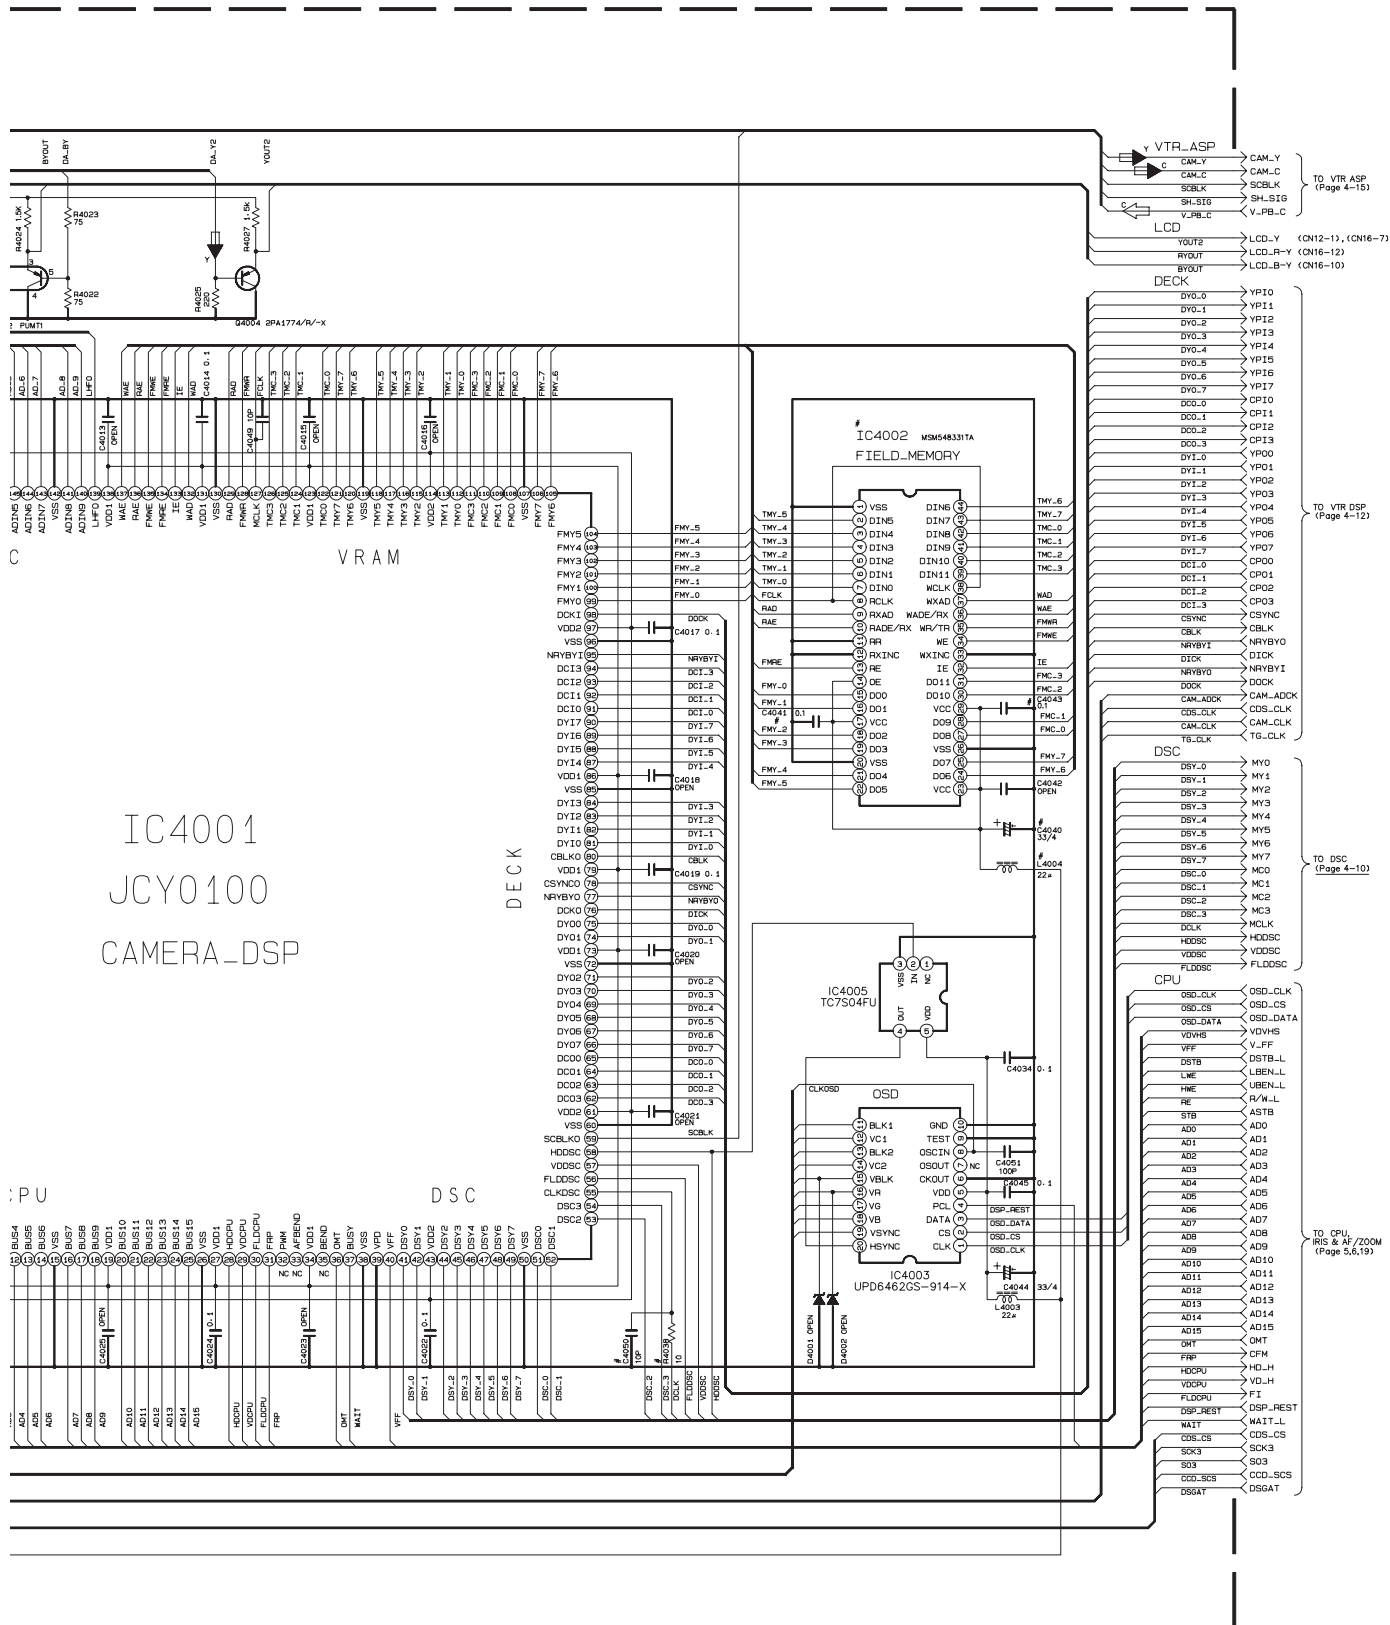

4-9



TO CPU (Page 4-3): **Refer to this service manual**




SECTION 5 PARTS LIST

SAFETY PRECAUTION

Parts identified by the $\triangle$ symbol are critical for safety. Replace only with specified part numbers.

5.1 PACKING ASSEMBLY <M1>

The instruction manual to be provided with this product will differ according to the destination.

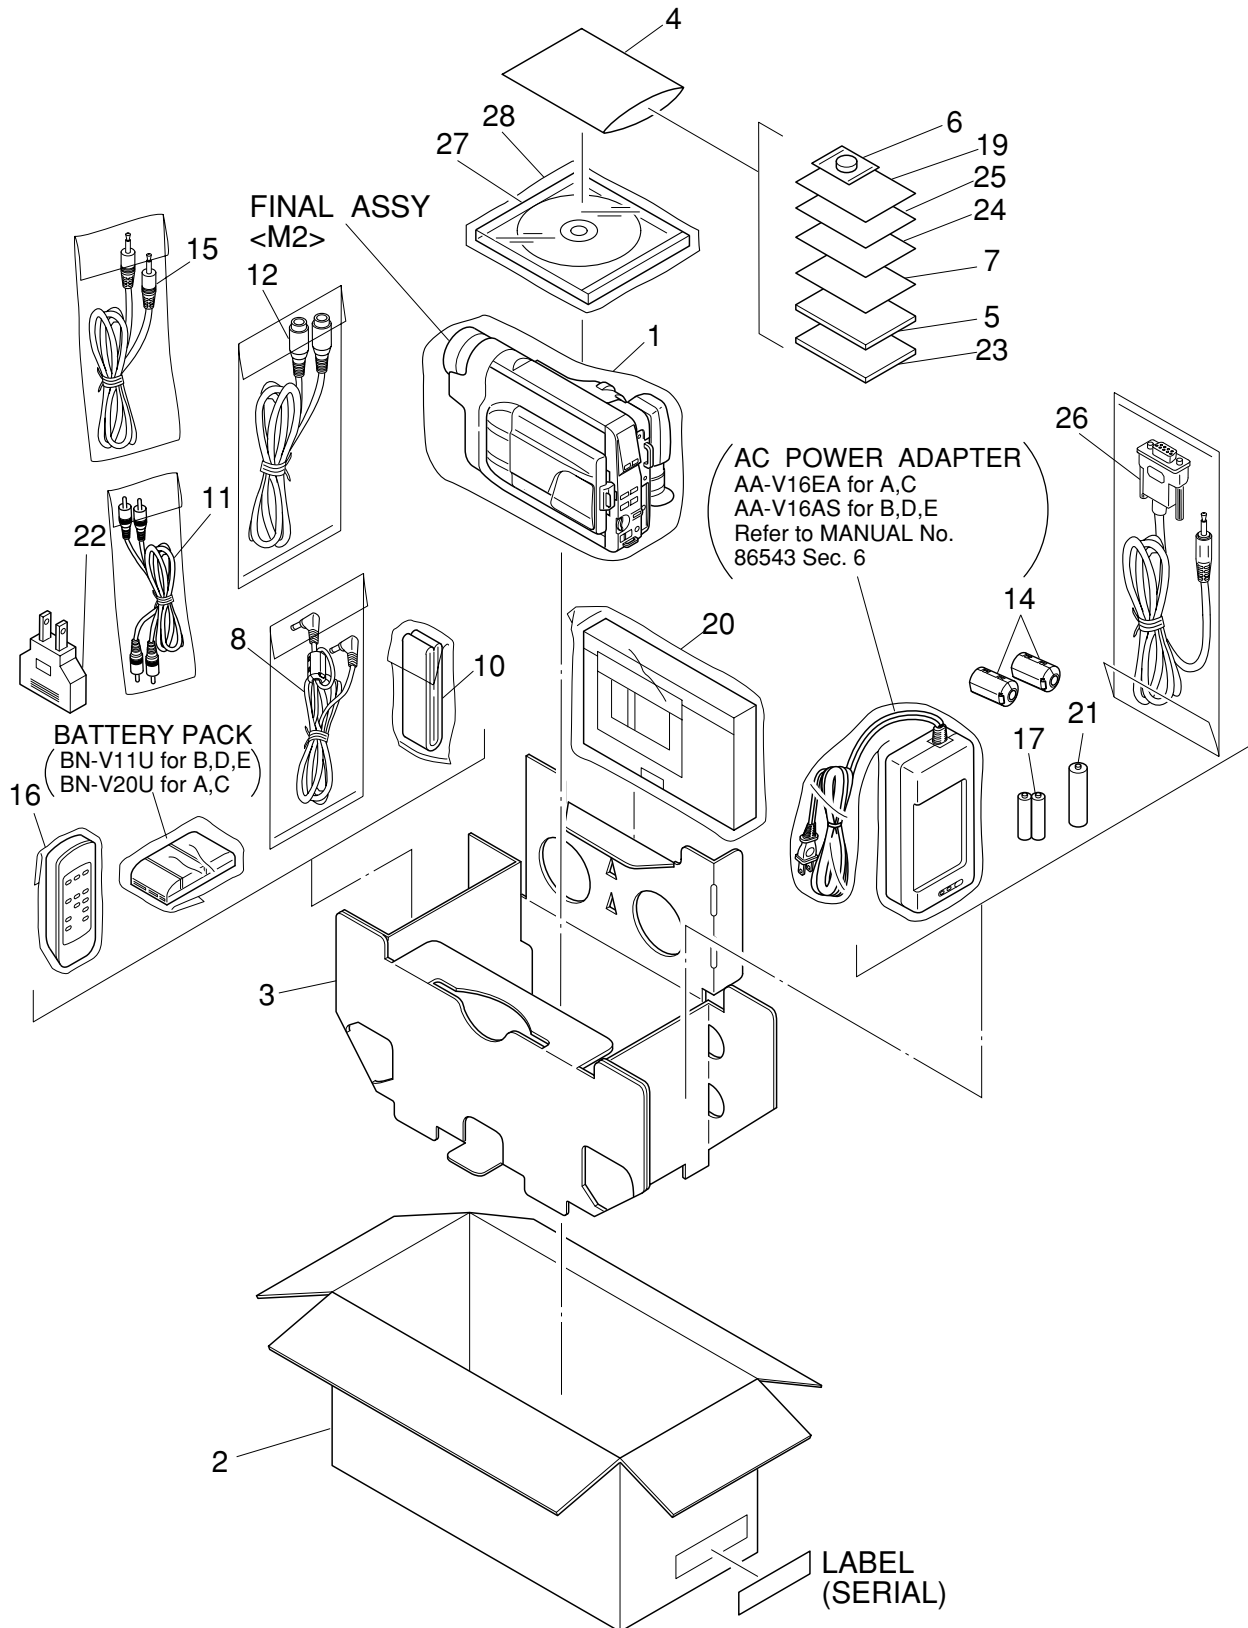

△ REF No. PART No. PART NAME, DESCRIPTION

PACKING ASSEMBLY <M1>

1	LY30023-002A	POLY BAG
2	LY31143-019A	PACKING CASE,E
	LY31561-030A	PACKING CASE,A
	LY31561-033A	PACKING CASE,C
	LY31561-040A	PACKING CASE,D
	LY31561-042A	PACKING CASE,B
3	LY31184-001A	CUSHION,E
	LY31563-001A	CUSHION,A,B,C,D
4	QPA02003006	POLY BAG
△ 5	LYT0529-001A	IB(EN),A,B,C,D
△	LYT0530-001A	IB(EN),E
△	LYT0529-002A	IB(CH),B,D
△	LYT0530-002A	IB(CH),E
△	LYT0529-003A	IB(RU),B,D
△	LYT0530-003A	IB(RU),E
△	LYT0529-004A	IB(AR),B,D
△	LYT0530-004A	IB(AR),E
△ 6	PECA0903	LI BATTERY
7	BT-56001-2	WARRANTY CARD,A,C
8	QAM0170-01	DC CORD
10	LY20186-001A	SHOULDER STRAP
11	PEAC0362-150	CABLE ASSY(AUDIO/VIDEO)
12	QAM0004-003	S CABLE,S-VIDEO CABLE
14	QQR0491-002	CORE FILTER,X2
15	PEAC0428-150	CABLE ASSY(EDITING),C,D,E
16	LY20543-002A	REMOTE CONTROLLER,C,D,E
17	-	BATTERY,RCU,R03(AAA)X2 C,D,E
19	BT-56002-2	SER. NET CARD, A,C
20	YQ31963A-3	CASS.ADAPTER ASSY
	or YQ31963B-3	CASS.ADAPTER ASSY
21	-	BATTERY,CASS.ADAPTER,R6(AA)
△ 22	PEMC1012	CONVERSION PLUG,B,D,E
△ 23	LYT0309-001B	IB(SOFT)(EN),E
△	LYT0309-013A	IB(SOFT)(PT),E
△ 24	LYT0309-004A	SHEET(INSTALL),E
△ 25	YU30843-4	SOFT WARE PERM.E
26	QAM0084-001	PC CONNECTION CABLE,E
27	LY31133-001B	CD ROM ASSY,E
28	LY30023-010A	POLY BAG,E

• INSTRUCTIONS

EN ENGLISH
CH CHINESE
RU RUSSIAN
AR ARABIAN
PT PORTUGUESE

MODEL	MARK
GR-SXM26EA	A
GR-SXM260A-S	B
GR-SXM46EA	C
GR-SXM460A-S	D
GR-SXM760A-S	E

5.2 ELECTRICAL PARTS LIST

MODEL	MARK	MODEL	MARK
GR-SXM26EA	A	GR-SXM460A-S	D
GR-SXM260A-S	B	GR-SXM760A-S	E
GR-SXM46EA	C		

#	△	REF No.	PART No.	PART NAME, DESCRIPTION

MAIN BOARD ASSEMBLY <01>				
		PW	YB10271EH-04	MAIN BOARD ASSY,A,B
			YB10271EJ-04	MAIN BOARD ASSY,C,D
			YB10271ES-04	MAIN BOARD ASSY,E
		IC101	UPD703039-016	IC(MICRO C ROM)
			or UPD70F3040-016	IC(MICRO C ROM)
		IC102	S-81332HG-KC-X	IC
		IC104	AT25080N-10SC-X	IC
		IC105	M62367GP	IC
		IC106	IC-PST9327U-X	IC
		IC107	RS5C314	IC
		IC1201	BA8400FV	IC
△		IC1601	BA6866KV	IC
		IC1801	PIC-26043S	IR DETECT UNIT
		IC2001	TC74AC04FT	IC(DIGITAL)
		IC2401	NJM2073M-XE	IC
		IC3001	JCY0130	IC
		IC3002	74HC1G04GW	IC
		IC3004	TC74VHC74FT	IC
		IC3101	HA118219F	IC
		IC3501	M52385FP	IC
		IC3901	TC7WHU04FU	IC
		IC4001	JCY0100	IC
		IC4002	MSM548331TA	IC(DIGITAL),C,D,E
		IC4003	UPD6466GS-544-X	IC
		IC4004	MM1385NN	IC
		IC4005	TC7S04FU	IC
		IC4201	UPC358G2/5/-W	IC
		IC4202	BA10324AFV-XE	IC
		IC4251	BA10358F-XE	IC
		IC4501	UPD16835G3	IC
		IC5201	HD49326AF	IC
		IC5202	JCY0098	IC
		IC6001	FA3676F	IC
		IC8001	JCY0076B	IC,E
		IC8002	M32000D3FP	IC,E
		IC8003	TC58FVT16FT0/79	IC(MICRO C ROM),E
		IC8004	IC-PST9329U-X	IC,E
		IC8006	MAX3221CAE	IC,E
		IC8007	TC7W04FU	IC(DIGITAL),E
		Q101	2SA1774/RS/-X	TRANSISTOR
		Q102	DTC144EE	TRANSISTOR
		Q103	2SC4617/QR/-X	TRANSISTOR
		Q104	DTC144EE	TRANSISTOR
		Q105	2SA1774/RS/-X	TRANSISTOR
		Q106	DTC144EE	TRANSISTOR
		Q107	DTA144EE	TRANSISTOR
		Q110	DTC144EE	TRANSISTOR
		Q111	DTA114EE	TRANSISTOR,E
		Q2001	DTA114TE	TRANSISTOR
		Q2006	DTC144EE	TRANSISTOR
		Q2007	PUMX1	PAIR TRANSISTOR
		Q2008	PUMT1	PAIR TRANSISTOR
		Q2061	2SC4617/QR/-X	TRANSISTOR,C,D
		Q2071	2SC4617/QR/-X	TRANSISTOR
		Q2072	PUMX1	PAIR TRANSISTOR
		Q3002	HN1C01FU/G/-X	PAIR TRANSISTOR
			or PUMX1	PAIR TRANSISTOR

#	△	REF No.	PART No.	PART NAME, DESCRIPTION
		Q3003	2SA1577/QR/-X	TRANSISTOR
		Q3004	DTC144EE	TRANSISTOR
		Q3005	DTA144EE	TRANSISTOR
		Q3101	HN1C01FU/G/-X	PAIR TRANSISTOR
			or PUMX1	PAIR TRANSISTOR
		Q3102	HN1A01FU/G/-X	PAIR TRANSISTOR
			or PUMT1	PAIR TRANSISTOR
		Q3103	HN1C01FU/G/-X	PAIR TRANSISTOR
			or PUMX1	PAIR TRANSISTOR
		Q3104	HN1A01FU/G/-X	PAIR TRANSISTOR
			or PUMT1	PAIR TRANSISTOR
		Q3105	HN1C01FU/G/-X	PAIR TRANSISTOR
			or PUMX1	PAIR TRANSISTOR
		Q3106	HN1A01FU/G/-X	PAIR TRANSISTOR
			or PUMT1	PAIR TRANSISTOR
		Q3501	HN1C01FU/G/-X	PAIR TRANSISTOR
		Q3502	HN1C01FU/G/-X	PAIR TRANSISTOR
		Q3506	DTC144EE	TRANSISTOR
		Q3901	DTA114EE	TRANSISTOR
		Q3902	DTC144EE	TRANSISTOR
		Q3903	2SC4617/QR/-X	TRANSISTOR
		Q3904	DTC144EE	TRANSISTOR
		Q4001	PUMT1	PAIR TRANSISTOR
		Q4002	PUMT1	PAIR TRANSISTOR
		Q4004	2PA1774/R/-X	TRANSISTOR
		Q4201	2SC4617/QRS/-X	TRANSISTOR
			or 2SC4738/YG/-X	TRANSISTOR
		Q4251	RPM-22PB	PHOTO TRANSISTOR
		Q4501	DTC114EE	TRANSISTOR
		Q6111	NDS352AP	MOS FET
		Q6121	NDS352AP	MOS FET
		Q6123	2SB1121/ST/-X	TRANSISTOR
		Q6124	2SC4617/QR/-X	TRANSISTOR
			or 2SC4738/YG/-X	TRANSISTOR
		Q6131	NDS352AP	MOS FET
		Q6141	NDS352AP	MOS FET
		Q6151	NDS352AP	MOS FET
		Q6161	NDS352AP	MOS FET
		Q6162	HN1C01FU/G/-X	PAIR TRANSISTOR
		Q6163	2SA1577/QR/-X	TRANSISTOR
		Q6164	2SC4617/QR/-X	TRANSISTOR
			or 2SC4738/YG/-X	TRANSISTOR
		Q6165	HN1A01FU/G/-X	PAIR TRANSISTOR
		Q6166	2SC4617/QR/-X	TRANSISTOR
			or 2SC4738/YG/-X	TRANSISTOR
		Q6167	2SA1774/QR/-X	TRANSISTOR
			or 2SA1832/YG/-X	TRANSISTOR
		Q6168	DTC144EE	TRANSISTOR
			or RN1104	TRANSISTOR
		Q6201	2SA1774/QR/-X	TRANSISTOR
			or 2SA1832/YG/-X	TRANSISTOR
		Q6202	2SD1628/FG/-X	TRANSISTOR
		Q6203	2SC4617/QR/-X	TRANSISTOR
			or 2SC4738/YG/-X	TRANSISTOR
△		D101	SB007W03Q	SB DIODE
		D102	UDZS7.5B	ZENER DIODE
		D105	1SS355	DIODE
		D106	1SS355	DIODE
		D107	SB007W03Q	SB DIODE
		D501	MA8068	ZENER DIODE
		D502	MA8068	ZENER DIODE

#	△	REF No.	PART No.	PART NAME, DESCRIPTION		#	△	REF No.	PART No.	PART NAME, DESCRIPTION	
		D3001	DAN222	DIODE				R148	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
		D3002	DAN222	DIODE				R150	NRSA63J-331X	MG RESISTOR	330Ω,1/16W
		D3101	MA8068	ZENER DIODE				R152	NRSA63J-474X	MG RESISTOR	470kΩ,1/16W
		D3102	MA8068	ZENER DIODE				R153	NRSA63J-474X	MG RESISTOR	470kΩ,1/16W
		D3103	MA8068	ZENER DIODE				R154	NRSA63J-474X	MG RESISTOR	470kΩ,1/16W
		D5201	1SS355	DIODE				R155	NRSA63J-474X	MG RESISTOR	470kΩ,1/16W
		D6111	CRS06	SB DIODE				R156	NRSA63J-474X	MG RESISTOR	470kΩ,1/16W
		D6121	CRS06	SB DIODE				R157	NRSA63J-474X	MG RESISTOR	470kΩ,1/16W
		D6131	CRS06	SB DIODE				R158	NRSA63J-474X	MG RESISTOR	470kΩ,1/16W
		D6141	CRS06	SB DIODE				R159	NRSA63J-474X	MG RESISTOR	470kΩ,1/16W
		D6151	CRS06	SB DIODE				R160	NRSA63J-474X	MG RESISTOR	470kΩ,1/16W
		D6152	CRS06	SB DIODE				R161	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W
		D6161	1SS357	SB DIODE				R162	NRSA63J-472X	MG RESISTOR	4.7kΩ,1/16W
		D6162	1SS357	SB DIODE				R163	NRSA63J-331X	MG RESISTOR,E	330Ω,1/16W
		D6163	1SS357	SB DIODE				R164	NRSA63J-472X	MG RESISTOR	4.7kΩ,1/16W
		D6164	1SS357	SB DIODE				R166	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W
		D6165	MA8091/L-X	ZENER DIODE				R167	NRSA63J-183X	MG RESISTOR	18kΩ,1/16W
		R101	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W			R168	NRSA63J-562X	MG RESISTOR	5.6kΩ,1/16W
△		R104	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W			R170	NRSA63J-333X	MG RESISTOR	33kΩ,1/16W
		R105	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W			R171	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W
		R106	NRSA63J-561X	MG RESISTOR	560Ω,1/16W			R501	NRSA63J-105X	MG RESISTOR	1MΩ,1/16W
		R107	NRVA63D-153X	CMF RESISTOR	15kΩ,1/16W			R504	NRSA63J-221X	MG RESISTOR	220Ω,1/16W
		R108	NRVA63D-243X	CMF RESISTOR	24kΩ,1/16W			R505	NRSA63J-331X	MG RESISTOR	330Ω,1/16W
		R109	NRVA63D-183X	CMF RESISTOR	18kΩ,1/16W			R1201	NRSA63J-824X	MG RESISTOR	820kΩ,1/16W
		R110	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W			R1202	NRSA63J-821X	MG RESISTOR	820Ω,1/16W
		R111	NRSA63J-273X	MG RESISTOR	27kΩ,1/16W			R1203	NRSA63J-472X	MG RESISTOR	4.7kΩ,1/16W
		R112	NRSA63J-331X	MG RESISTOR	330Ω,1/16W			R1204	NRSA63J-274X	MG RESISTOR	270kΩ,1/16W
		R113	NRSA63J-562X	MG RESISTOR	5.6kΩ,1/16W			R1601	NRV142F-R33X	CMF RESISTOR	0.33Ω,1/4W
		R114	NRSA63J-821X	MG RESISTOR	820Ω,1/16W			R1602	NRV142F-R33X	CMF RESISTOR	0.33Ω,1/4W
		R115	NRSA63J-101X	MG RESISTOR	100Ω,1/16W			R1603	NRSA63J-154X	MG RESISTOR	150kΩ,1/16W
		R116	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W			R1604	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
		R118	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W			R1605	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
		R119	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W			R1606	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
		R120	NRSA63J-273X	MG RESISTOR	27kΩ,1/16W			R1607	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W
		R121	NRSA63J-273X	MG RESISTOR	27kΩ,1/16W			R1608	NRSA63J-474X	MG RESISTOR	470kΩ,1/16W
		R122	NRSA63J-393X	MG RESISTOR	39kΩ,1/16W			R1609	NRSA63J-184X	MG RESISTOR	180kΩ,1/16W
		R123	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W			R1610	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W
		R124	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W			R1612	NRVA63D-332X	CMF RESISTOR	3.3kΩ,1/16W
		R125	NRSA63J-273X	MG RESISTOR	27kΩ,1/16W			R1613	NRSA63J-333X	MG RESISTOR	33kΩ,1/16W
		R126	NRSA63J-153X	MG RESISTOR	15kΩ,1/16W			R1614	NRSA63J-123X	MG RESISTOR	12kΩ,1/16W
		R127	NRSA63J-221X	MG RESISTOR	220Ω,1/16W			R1615	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W
		R128	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W			R1617	NRVA63D-392X	CMF RESISTOR	3.9kΩ,1/16W
		R129	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W			R1618	NRSA63J-154X	MG RESISTOR	150kΩ,1/16W
		R130	NRSA63J-105X	MG RESISTOR	1MΩ,1/16W			R1619	NRSA63J-471X	MG RESISTOR	470Ω,1/16W
		R131	NRSA63J-105X	MG RESISTOR	1MΩ,1/16W			R1620	NRSA63J-684X	MG RESISTOR	680kΩ,1/16W
		R132	NRSA63J-105X	MG RESISTOR	1MΩ,1/16W			R1621	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
		R133	NRSA63J-105X	MG RESISTOR	1MΩ,1/16W			R1622	NRSA63J-224X	MG RESISTOR	220kΩ,1/16W
		R134	NRSA63J-105X	MG RESISTOR	1MΩ,1/16W			R1623	NRSA63J-223X	MG RESISTOR	22kΩ,1/16W
		R135	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W			R1628	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
		R136	NRSA63J-474X	MG RESISTOR	470kΩ,1/16W			R1629	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
		R137	NRSA63J-273X	MG RESISTOR	27kΩ,1/16W			R1630	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
		R138	NRSA63J-333X	MG RESISTOR	33kΩ,1/16W			R1631	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
		R139	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W			R1632	NRSA63J-153X	MG RESISTOR	15kΩ,1/16W
		R140	NRSA63J-124X	MG RESISTOR	120kΩ,1/16W			R1633	NRSA63J-683X	MG RESISTOR	68kΩ,1/16W
		R141	NRSA63J-105X	MG RESISTOR	1MΩ,1/16W			R2001	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W
		R142	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W			R2002	NRSA63J-332X	MG RESISTOR	3.3kΩ,1/16W
		R143	NRSA63J-105X	MG RESISTOR	1MΩ,1/16W			R2003	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
		R144	NRSA63J-221X	MG RESISTOR	220Ω,1/16W			R2004	NRSA63J-681X	MG RESISTOR	680Ω,1/16W
		R145	NRSA63J-222X	MG RESISTOR	2.2kΩ,1/16W			R2005	NRSA63J-272X	MG RESISTOR	2.7kΩ,1/16W
		R146	NRSA63J-474X	MG RESISTOR	470kΩ,1/16W			R2006	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
		R147	NRSA63J-472X	MG RESISTOR	4.7kΩ,1/16W			R2011	NRSA63J-101X	MG RESISTOR	100Ω,1/16W

# ▲ REF No.	PART No.	PART NAME, DESCRIPTION		# ▲ REF No.	PART No.	PART NAME, DESCRIPTION	
R2012	NRSA63J-101X	MG RESISTOR	100Ω,1/16W	R3501	NRSA63J-681X	MG RESISTOR	680Ω,1/16W
R2016	NRVA63D-183X	CMF RESISTOR	18kΩ,1/16W	R3503	NRSA63J-471X	MG RESISTOR	470Ω,1/16W
R2021	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W	R3504	NRSA63J-681X	MG RESISTOR	680Ω,1/16W
R2022	NRSA63J-334X	MG RESISTOR	330kΩ,1/16W	R3506	NRSA63J-681X	MG RESISTOR	680Ω,1/16W
R2023	NRSA63J-820X	MG RESISTOR	82Ω,1/16W	R3508	NRSA63J-471X	MG RESISTOR	470Ω,1/16W
R2024	NRSA63J-823X	MG RESISTOR	82kΩ,1/16W	R3509	NRSA63J-681X	MG RESISTOR	680Ω,1/16W
R2025	NRSA63J-153X	MG RESISTOR	15kΩ,1/16W	R3515	NRSA63J-243X	MG RESISTOR	24kΩ,1/16W
R2026	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W	R3519	NRSA63J-681X	MG RESISTOR	680Ω,1/16W
R2027	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W	R3536	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
R2029	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W	R3537	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
R2061	NRSA63J-103X	MG RESISTOR,C,D,E	10kΩ,1/16W	R3901	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
R2062	NRSA63J-334X	MG RESISTOR,C,D,E	330kΩ,1/16W	R3902	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
R2063	NRSA63J-104X	MG RESISTOR,C,D,E	100kΩ,1/16W	R4001	NRSA63J-113X	MG RESISTOR	11kΩ,1/16W
R2071	NRSA63J-473X	MG RESISTOR	47kΩ,1/16W	R4002	NRSA63J-123X	MG RESISTOR	12kΩ,1/16W
R2072	NRSA63J-682X	MG RESISTOR	6.8kΩ,1/16W	R4003	NRSA63J-153X	MG RESISTOR	15kΩ,1/16W
R2073	NRSA63J-682X	MG RESISTOR	6.8kΩ,1/16W	R4004	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W
R2074	NRSA63J-473X	MG RESISTOR	47kΩ,1/16W	R4006	NRVA63D-272X	CMF RESISTOR	2.7kΩ,1/16W
R2075	NRSA63J-473X	MG RESISTOR	47kΩ,1/16W	R4007	NRVA63D-272X	CMF RESISTOR	2.7kΩ,1/16W
R2076	NRSA63J-473X	MG RESISTOR	47kΩ,1/16W	R4008	NRVA63D-272X	CMF RESISTOR	2.7kΩ,1/16W
R2401	NRSA63J-683X	MG RESISTOR	68kΩ,1/16W	R4009	NRVA63D-152X	CMF RESISTOR	1.5kΩ,1/16W
R2402	NRSA63J-122X	MG RESISTOR	1.2kΩ,1/16W	R4010	NRVA63D-122X	CMF RESISTOR	1.2kΩ,1/16W
R2403	NRSA63J-2R2X	MG RESISTOR	2.2Ω,1/16W	R4011	NRVA63D-152X	CMF RESISTOR	1.5kΩ,1/16W
R2404	NRSA63J-2R2X	MG RESISTOR	2.2Ω,1/16W	R4012	NRVA63D-122X	CMF RESISTOR	1.2kΩ,1/16W
R3001	NRSA63J-105X	MG RESISTOR	1MΩ,1/16W	R4013	NRVA63D-152X	CMF RESISTOR	1.5kΩ,1/16W
R3002	NRSA63J-471X	MG RESISTOR	470Ω,1/16W	R4014	NRVA63D-122X	CMF RESISTOR	1.2kΩ,1/16W
R3004	NRSA63J-273X	MG RESISTOR	27kΩ,1/16W	R4015	NRVA63D-181X	CMF RESISTOR	180Ω,1/16W
R3006	NRSA63J-681X	MG RESISTOR	680Ω,1/16W	R4016	NRSA63J-152X	MG RESISTOR	1.5kΩ,1/16W
R3007	NRSA63J-153X	MG RESISTOR	15kΩ,1/16W	R4017	NRVA63D-181X	CMF RESISTOR	180Ω,1/16W
R3008	NRSA63J-393X	MG RESISTOR	39kΩ,1/16W	R4018	NRSA63J-152X	MG RESISTOR	1.5kΩ,1/16W
R3009	NRSA63J-272X	MG RESISTOR	2.7kΩ,1/16W	R4019	NRVA63D-620X	CMF RESISTOR	62Ω,1/16W
R3010	NRSA63J-332X	MG RESISTOR	3.3kΩ,1/16W	R4020	NRVA63D-101X	CMF RESISTOR	100Ω,1/16W
R3014	NRSA63J-681X	MG RESISTOR	680Ω,1/16W	R4021	NRSA63J-152X	MG RESISTOR	1.5kΩ,1/16W
R3015	NRSA63J-332X	MG RESISTOR	3.3kΩ,1/16W	R4022	NRVA63D-750X	CMF RESISTOR	75Ω,1/16W
R3016	NRSA63J-332X	MG RESISTOR	3.3kΩ,1/16W	R4023	NRVA63D-750X	CMF RESISTOR	75Ω,1/16W
R3018	NRSA63J-271X	MG RESISTOR	270Ω,1/16W	R4024	NRSA63J-152X	MG RESISTOR	1.5kΩ,1/16W
R3023	NRSA63J-561X	MG RESISTOR	560Ω,1/16W	R4025	NRVA63D-221X	CMF RESISTOR	220Ω,1/16W
R3024	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W	R4027	NRSA63J-152X	MG RESISTOR	1.5kΩ,1/16W
R3026	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W	R4036	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
R3027	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W	R4037	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
R3028	NRVA63D-472X	CMF RESISTOR	4.7kΩ,1/16W	R4038	NRSA63J-100X	MG RESISTOR,E	10Ω,1/16W
R3029	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W	R4201	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W
R3030	NRSA63J-561X	MG RESISTOR	560Ω,1/16W	R4202	NRSA63J-563X	MG RESISTOR	56kΩ,1/16W
R3033	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W	R4203	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W
R3034	NRSA63J-220X	MG RESISTOR	22Ω,1/16W	R4204	NRSA63J-331X	MG RESISTOR	330Ω,1/16W
R3035	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W	R4205	NRSA63J-105X	MG RESISTOR	1MΩ,1/16W
R3101	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W	R4206	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W
R3102	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W	R4207	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W
R3103	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W	R4208	NRSA63J-472X	MG RESISTOR	4.7kΩ,1/16W
R3109	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W	R4209	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W
R3110	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W	R4210	NRSA63J-105X	MG RESISTOR	1MΩ,1/16W
R3111	NRSA02J-560X	MG RESISTOR	56Ω,1/10W	R4211	NRSA63J-243X	MG RESISTOR	24kΩ,1/16W
R3112	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W	R4214	NRSA63J-472X	MG RESISTOR	4.7kΩ,1/16W
R3113	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W	R4215	NRSA63J-683X	MG RESISTOR	68kΩ,1/16W
R3114	NRSA02J-560X	MG RESISTOR	56Ω,1/10W	R4216	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W
R3115	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W	R4217	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
R3116	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W	R4218	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
R3117	NRSA02J-560X	MG RESISTOR	56Ω,1/10W	R4219	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W
R3131	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W	R4220	NRSA63J-152X	MG RESISTOR	1.5kΩ,1/16W
R3132	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W	R4221	NRSA63J-334X	MG RESISTOR	330kΩ,1/16W
R3134	NRSA63J-221X	MG RESISTOR	220Ω,1/16W	R4222	NRSA63J-154X	MG RESISTOR	150kΩ,1/16W
R3135	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W	R4223	NRSA63J-333X	MG RESISTOR	33kΩ,1/16W

#	△	REF No.	PART No.	PART NAME, DESCRIPTION		#	△	REF No.	PART No.	PART NAME, DESCRIPTION		
			R4224	NRSA63J-223X	MG RESISTOR	22kΩ, 1/16W			R6153	NRVA63D-103X	CMF RESISTOR	10kΩ, 1/16W
			R4251	NRSA63J-182X	MG RESISTOR	1.8kΩ, 1/16W			R6161	NRSA63J-4R7X	MG RESISTOR	4.7Ω, 1/16W
			R4252	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W			R6162	NRVA63D-683X	CMF RESISTOR	68kΩ, 1/16W
			R4253	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W			R6163	NRVA63D-392X	CMF RESISTOR	3.9kΩ, 1/16W
			R4254	NRSA63J-684X	MG RESISTOR	680kΩ, 1/16W			R6164	NRSA63J-394X	MG RESISTOR	390kΩ, 1/16W
			R4255	NRSA63J-222X	MG RESISTOR	2.2kΩ, 1/16W			R6165	NRSA63J-473X	MG RESISTOR	47kΩ, 1/16W
			R4256	NRSA63J-824X	MG RESISTOR	820kΩ, 1/16W			R6166	NRSA63J-273X	MG RESISTOR	27kΩ, 1/16W
			R4257	NRSA63J-822X	MG RESISTOR	8.2kΩ, 1/16W			R6167	NRSA63J-822X	MG RESISTOR	8.2kΩ, 1/16W
			R4258	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W			R6168	NRVA63D-513X	CMF RESISTOR	51kΩ, 1/16W
			R4259	NRSA63J-683X	MG RESISTOR	68kΩ, 1/16W			R6169	NRVA63D-823X	CMF RESISTOR	82kΩ, 1/16W
			R4262	NRSA63J-302X	MG RESISTOR	3kΩ, 1/16W			R6170	NRVA63D-473X	CMF RESISTOR	47kΩ, 1/16W
△		R4501	NRSA63J-6R8X	MG RESISTOR	6.8Ω, 1/16W			R6171	NRSA63J-222X	MG RESISTOR	2.2kΩ, 1/16W	
△		R4502	NRSA63J-6R8X	MG RESISTOR	6.8Ω, 1/16W			R6172	NRVA63D-823X	CMF RESISTOR	82kΩ, 1/16W	
△		R4503	NRSA63J-6R8X	MG RESISTOR	6.8Ω, 1/16W			R6173	NRSA63J-474X	MG RESISTOR	470kΩ, 1/16W	
△		R4504	NRSA63J-6R8X	MG RESISTOR	6.8Ω, 1/16W			R6174	NRVA63D-683X	CMF RESISTOR	68kΩ, 1/16W	
		R4505	NRSA63J-271X	MG RESISTOR	270Ω, 1/16W			R6175	NRSA63J-333X	MG RESISTOR	33kΩ, 1/16W	
		R4506	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W			R6176	NRSA63J-333X	MG RESISTOR	33kΩ, 1/16W	
		R4507	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W			R6177	NRSA63J-102X	MG RESISTOR	1kΩ, 1/16W	
		R4514	NRSA63J-223X	MG RESISTOR	22kΩ, 1/16W			R6178	NRSA63J-222X	MG RESISTOR	2.2kΩ, 1/16W	
		R4515	NRSA63J-182X	MG RESISTOR	1.8kΩ, 1/16W			R6179	NRSA63J-272X	MG RESISTOR	2.7kΩ, 1/16W	
		R4518	NRSA63J-0R0X	MG RESISTOR	0Ω, 1/16W			R6180	NRSA63J-823X	MG RESISTOR	82kΩ, 1/16W	
		R5201	NRSA63J-243X	MG RESISTOR	24kΩ, 1/16W			R6181	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W	
		R5202	NRSA63J-220X	MG RESISTOR	22Ω, 1/16W			R6182	NRSA63J-473X	MG RESISTOR	47kΩ, 1/16W	
		R5211	NRSA63J-562X	MG RESISTOR	5.6kΩ, 1/16W			R6201	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W	
		R5212	NRSA63J-101X	MG RESISTOR	100Ω, 1/16W			R6202	NRSA63J-181X	MG RESISTOR	180Ω, 1/16W	
		R5213	NRSA63J-101X	MG RESISTOR	100Ω, 1/16W			R6203	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W	
		R5214	NRSA63J-101X	MG RESISTOR	100Ω, 1/16W			R6205	NRSA63J-184X	MG RESISTOR	180kΩ, 1/16W	
		R5215	NRSA63J-104X	MG RESISTOR	0.1kΩ, 1/16W			R6206	NRSA63J-102X	MG RESISTOR	1kΩ, 1/16W	
		R5216	NRSA63J-100X	MG RESISTOR	10Ω, 1/16W			R6914	NRSA63J-0R0X	MG RESISTOR	0Ω, 1/16W	
		R5217	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W			R6931	NRSA63J-4R7X	MG RESISTOR	4.7Ω, 1/16W	
		R5218	NRSA63J-0R0X	MG RESISTOR	0Ω, 1/16W			R7808	NRSA63J-0R0X	MG RESISTOR	0Ω, 1/16W	
		R5220	NRSA63J-0R0X	MG RESISTOR	0Ω, 1/16W			R8001	NRSA63J-104X	MG RESISTOR,E	100kΩ, 1/16W	
		R6001	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W			R8002	NRSA63J-101X	MG RESISTOR,E	100Ω, 1/16W	
		R6002	NRSA63J-823X	MG RESISTOR	82kΩ, 1/16W			R8003	NRSA63J-101X	MG RESISTOR,E	100Ω, 1/16W	
		R6009	NRVA63D-153X	CMF RESISTOR	15kΩ, 1/16W			R8004	NRSA63J-104X	MG RESISTOR,E	100kΩ, 1/16W	
		R6010	NRSA63J-223X	MG RESISTOR	22kΩ, 1/16W			R8005	NRSA63J-104X	MG RESISTOR,E	100kΩ, 1/16W	
		R6011	NRSA63J-223X	MG RESISTOR	22kΩ, 1/16W			R8006	NRSA63J-102X	MG RESISTOR,E	1kΩ, 1/16W	
		R6012	NRSA63J-472X	MG RESISTOR	4.7kΩ, 1/16W			R8007	NRSA63J-0R0X	MG RESISTOR,E	0Ω, 1/16W	
		R6111	NRSA63J-4R7X	MG RESISTOR	4.7Ω, 1/16W			R8012	NRSA63J-472X	MG RESISTOR,E	4.7kΩ, 1/16W	
		R6112	NRVA63D-223X	CMF RESISTOR	22kΩ, 1/16W			R8014	NRSA63J-0R0X	MG RESISTOR,E	0Ω, 1/16W	
		R6113	NRVA63D-103X	CMF RESISTOR	10kΩ, 1/16W			R8015	NRSA63J-0R0X	MG RESISTOR,E	0Ω, 1/16W	
		R6121	NRSA63J-4R7X	MG RESISTOR	4.7Ω, 1/16W			R8016	NRSA63J-0R0X	MG RESISTOR,E	0Ω, 1/16W	
		R6122	NRVA63D-183X	CMF RESISTOR	18kΩ, 1/16W			R8017	NRSA63J-0R0X	MG RESISTOR,E	0Ω, 1/16W	
		R6123	NRVA63D-472X	CMF RESISTOR	4.7kΩ, 1/16W			R8018	NRSA63J-0R0X	MG RESISTOR,E	0Ω, 1/16W	
		R6125	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W			R8019	NRSA63J-0R0X	MG RESISTOR,E	0Ω, 1/16W	
		R6126	NRSA63J-152X	MG RESISTOR	1.5kΩ, 1/16W			R8020	NRSA63J-0R0X	MG RESISTOR,E	0Ω, 1/16W	
		R6127	NRSA63J-473X	MG RESISTOR	47kΩ, 1/16W			R8021	NRSA63J-0R0X	MG RESISTOR,E	0Ω, 1/16W	
		R6131	NRSA63J-473X	MG RESISTOR	47kΩ, 1/16W			R8022	NRSA63J-0R0X	MG RESISTOR,E	0Ω, 1/16W	
		R6133	NRSA63J-473X	MG RESISTOR	47kΩ, 1/16W			R8023	NRSA63J-0R0X	MG RESISTOR,E	0Ω, 1/16W	
		R6134	NRVA63D-302X	CMF RESISTOR	3kΩ, 1/16W			R8024	NRSA63J-0R0X	MG RESISTOR,E	0Ω, 1/16W	
		R6135	NRSA63J-823X	MG RESISTOR	82kΩ, 1/16W			R8025	NRSA63J-0R0X	MG RESISTOR,E	0Ω, 1/16W	
		R6136	NRSA63J-113X	MG RESISTOR	11kΩ, 1/16W			R8026	NRSA63J-0R0X	MG RESISTOR,E	0Ω, 1/16W	
		R6137	NRSA63J-682X	MG RESISTOR	6.8kΩ, 1/16W			R8027	NRSA02J-105X	MG RESISTOR,E	1MΩ, 1/10W	
		R6141	NRSA63J-4R7X	MG RESISTOR	4.7Ω, 1/16W			RA101	NRZ0038-222X	NETWORK RESISTOR	2.2kΩ	
		R6142	NRSA63J-243X	MG RESISTOR	24kΩ, 1/16W			RA102	NRZ0038-222X	NETWORK RESISTOR	2.2kΩ	
		R6143	NRSA63J-332X	MG RESISTOR	3.3kΩ, 1/16W			RA103	NRZ0038-222X	NETWORK RESISTOR	2.2kΩ	
		R6144	NRSA63J-0R0X	MG RESISTOR	0Ω, 1/16W			RA104	NRZ0038-222X	NETWORK RESISTOR	2.2kΩ	
		R6145	NRSA63J-223X	MG RESISTOR	22kΩ, 1/16W			RA105	NRZ0038-473X	NETWORK RESISTOR	47kΩ	
		R6146	NRSA63J-823X	MG RESISTOR	82kΩ, 1/16W			RA106	NRZ0037-331X	NETWORK RESISTOR	330Ω	
		R6151	NRSA63J-4R7X	MG RESISTOR	4.7Ω, 1/16W			RA107	NRZ0038-222X	NETWORK RESISTOR	2.2kΩ	
		R6152	NRVA63D-103X	CMF RESISTOR	10kΩ, 1/16W			RA108	NRZ0038-222X	NETWORK RESISTOR	2.2kΩ	

# △ REF No.	PART No.	PART NAME, DESCRIPTION		# △ REF No.	PART No.	PART NAME, DESCRIPTION	
RA109	NRZ0038-222X	NETWORK RESISTOR	2.2kΩ	C2002	NFV41HJ-183X	MPPS CAPACITOR	0.018μF,50V
C101	NCF31CZ-104X	CAPACITOR	0.1μF,16V	C2003	NDC31HJ-331X	CAPACITOR	330pF,50V
C102	NEA71CM-226X	E CAPACITOR	22μF,16V	C2004	NBE20JM-226X	T CAPACITOR	22μF,6.3V
C103	NBE41AM-106X	T CAPACITOR	10μF,10V	C2005	NCB21CK-105X	CAPACITOR	1μF,16V
C104	NCB31EK-103X	CAPACITOR	0.01μF,25V	C2009	NBE40JM-226X	T CAPACITOR	22μF,6.3V
C105	NCB31CK-104X	CAPACITOR	0.1μF,16V	C2010	NCB31CK-104X	CAPACITOR	0.1μF,16V
C106	NCF31CZ-104X	CAPACITOR	0.1μF,16V	C2021	NCB31EK-103X	CAPACITOR	0.01μF,25V
C107	NCB31EK-103X	CAPACITOR	0.01μF,25V	C2022	NBE20JM-156X	T CAPACITOR	15μF,6.3V
C108	NBE21AM-225X	T CAPACITOR	2.2μF,10V	C2023	NCB31CK-104X	CAPACITOR,C,D,E	0.1μF,16V
C109	NBE41AM-106X	T CAPACITOR	10μF,10V	C2024	NCB31HK-222X	CAPACITOR	0.0022μF,50V
C110	NDC31HJ-101X	CAPACITOR	100pF,50V	C2025	NBP21EM-105X	T CAPACITOR	1μF,25V
C111	NEA70JM-226X	E CAPACITOR	22μF,6.3V	C2026	NCB31HK-102X	CAPACITOR	0.001μF,50V
C112	NEA70JM-226X	E CAPACITOR	22μF,6.3V	C2027	NCB21CK-474X	CAPACITOR	0.47μF,16V
C113	NCB31EK-103X	CAPACITOR	0.01μF,25V	C2028	NCF21CZ-105X	CAPACITOR	1μF,16V
C114	NCB31EK-103X	CAPACITOR	0.01μF,25V	C2029	NCB21AK-105X	CAPACITOR	1μF,10V
C116	NCB31EK-103X	CAPACITOR	0.01μF,25V	C2030	NBE20JM-475X	T CAPACITOR	4.7μF,6.3V
C118	NCF31CZ-104X	CAPACITOR	0.1μF,16V	C2031	NCB21CK-104X	CAPACITOR	0.1μF,16V
C119	NCB31EK-103X	CAPACITOR	0.01μF,25V	C2051	NCB31HK-682X	CAPACITOR	0.0068μF,50V
C120	NCB31EK-103X	CAPACITOR	0.01μF,25V	C2052	NCB31HK-222X	CAPACITOR	0.0022μF,50V
C121	NCF31CZ-104X	CAPACITOR	0.1μF,16V	C2061	NCB31CK-104X	CAPACITOR,C,D,E	0.1μF,16V
C122	NCF31CZ-104X	CAPACITOR	0.1μF,16V	C2062	NCB31CK-104X	CAPACITOR,C,D,E	0.1μF,16V
C123	NDC31HJ-100X	CAPACITOR	10pF,50V	C2071	NCB21AK-105X	CAPACITOR	1μF,10V
C124	NDC31HJ-100X	CAPACITOR	10pF,50V	C2072	NCB31HK-682X	CAPACITOR	0.0068μF,50V
C125	NCB31EK-103X	CAPACITOR	0.01μF,25V	C2073	NDC31HJ-331X	CAPACITOR	330pF,50V
C126	NDC31HJ-120X	CAPACITOR	12pF,50V	C2074	NCB31HK-332X	CAPACITOR	0.0033μF,50V
C127	NCB31CK-333X	CAPACITOR	0.033μF,16V	C2076	NCB31CK-104X	CAPACITOR	0.1μF,16V
C128	NCB21CK-474X	CAPACITOR	0.47μF,16V	C2401	NEA70GM-476X	E CAPACITOR	47μF,4.0V
C129	NCB31CK-333X	CAPACITOR	0.033μF,16V	C2402	NBE20JM-106X	T CAPACITOR	10μF,6.3V
C131	NCF31CZ-104X	CAPACITOR	0.1μF,16V	C2403	NCB31EK-103X	CAPACITOR	0.01μF,25V
C132	NCF31CZ-104X	CAPACITOR	0.1μF,16V	C2404	NCF31CZ-224X	CAPACITOR	0.22μF,16V
C133	NCF31CZ-104X	CAPACITOR	0.1μF,16V	C2405	NCB31CK-104X	CAPACITOR	0.1μF,16V
C134	NCF31CZ-104X	CAPACITOR	0.1μF,16V	C3002	NBE20JM-106X	T CAPACITOR	10μF,6.3V
C1201	NBE21AM-106X	T CAPACITOR	10μF,10V	C3003	NBE20JM-106X	T CAPACITOR	10μF,6.3V
C1202	NBE21AM-106X	T CAPACITOR	10μF,10V	C3004	NCB31CK-104X	CAPACITOR	0.1μF,16V
C1203	NCB31EK-223X	CAPACITOR	0.022μF,25V	C3005	NCB31CK-104X	CAPACITOR	0.1μF,16V
C1204	NCB31HK-102X	CAPACITOR	0.001μF,50V	C3006	NDC31HG-120X	CAPACITOR	12pF,50V
C1205	NBE21AM-106X	T CAPACITOR	10μF,10V	C3007	NDC31HG-100X	CAPACITOR	10pF,50V
C1206	NBE21AM-106X	T CAPACITOR	10μF,10V	C3009	NCB31CK-104X	CAPACITOR	0.1μF,16V
C1207	NCB31EK-103X	CAPACITOR	0.01μF,25V	C3011	NCB31CK-104X	CAPACITOR	0.1μF,16V
C1601	NCB31EK-103X	CAPACITOR	0.01μF,25V	C3012	NCB31CK-104X	CAPACITOR	0.1μF,16V
C1602	NBP41CM-106X	T CAPACITOR	10μF,16V	C3013	NCB31CK-104X	CAPACITOR	0.1μF,16V
C1603	NCB31CK-104X	CAPACITOR	0.1μF,16V	C3014	NCB31CK-104X	CAPACITOR	0.1μF,16V
C1604	NCB31CK-104X	CAPACITOR	0.1μF,16V	C3015	NCB31CK-104X	CAPACITOR	0.1μF,16V
C1605	NCB31CK-104X	CAPACITOR	0.1μF,16V	C3016	NCB31CK-104X	CAPACITOR	0.1μF,16V
C1606	NCB31CK-104X	CAPACITOR	0.1μF,16V	C3017	NCB31CK-104X	CAPACITOR	0.1μF,16V
C1607	NCB31EK-103X	CAPACITOR	0.01μF,25V	C3019	NCB31EK-103X	CAPACITOR	0.01μF,25V
C1608	NCB31CK-104X	CAPACITOR	0.1μF,16V	C3020	NCB31EK-103X	CAPACITOR	0.01μF,25V
C1609	NCB31HK-222X	CAPACITOR	0.0022μF,50V	C3022	NCB31CK-104X	CAPACITOR	0.1μF,16V
C1610	NCB21CK-334X	CAPACITOR	0.33μF,16V	C3027	NCB31EK-103X	CAPACITOR	0.01μF,25V
C1611	NBE41AM-226X	T CAPACITOR	22μF,10V	C3028	NCB31EK-103X	CAPACITOR	0.01μF,25V
C1612	NCB31HK-681X	CAPACITOR	680pF,50V	C3032	NDC31HJ-100X	CAPACITOR	10pF,50V
C1613	NCB21CK-474X	CAPACITOR	0.47μF,16V	C3033	NCB31CK-104X	CAPACITOR	0.1μF,16V
C1614	NCB31HK-152X	CAPACITOR	0.0015μF,50V	C3037	NDC31HJ-100X	CAPACITOR	10pF,50V
C1615	NBE21AM-106X	T CAPACITOR	10μF,10V	C3101	NBE20JM-106X	T CAPACITOR	10μF,6.3V
C1616	NCB31HK-822X	CAPACITOR	0.0082μF,50V	C3103	NBE20JM-106X	T CAPACITOR	10μF,6.3V
C1617	NBP41CM-106X	T CAPACITOR	10μF,16V	C3104	NDC31HJ-560X	CAPACITOR	56pF,50V
C1624	NCB31CK-223X	CAPACITOR	0.022μF,16V	C3105	NCB31CK-104X	CAPACITOR	0.1μF,16V
C1625	NCB31CK-223X	CAPACITOR	0.022μF,16V	C3106	NCB31CK-104X	CAPACITOR	0.1μF,16V
C1626	NCB31CK-223X	CAPACITOR	0.022μF,16V	C3107	NCB31EK-103X	CAPACITOR	0.01μF,25V
C1631	NCB31CK-683X	CAPACITOR	0.068μF,16V	C3108	NCB31EK-103X	CAPACITOR	0.01μF,25V
C2001	NBE20JM-106X	T CAPACITOR	10μF,6.3V	C3109	NCB31EK-103X	CAPACITOR	0.01μF,25V

# ▲ REF No.	PART No.	PART NAME, DESCRIPTION		# ▲ REF No.	PART No.	PART NAME, DESCRIPTION	
C3112	NBE20JM-475X	T CAPACITOR	4.7μF,6.3V	C4051	NDC31HJ-181X	CAPACITOR	180pF,50V
C3113	NCB21AK-105X	CAPACITOR	1μF,10V	C4201	NEA71HM-225X	E CAPACITOR	2.2μF,50V
C3114	NCB31EK-103X	CAPACITOR	0.01μF,25V	C4202	NCF31CZ-104X	CAPACITOR	0.1μF,16V
C3118	NCB31CK-104X	CAPACITOR	0.1μF,16V	C4203	NCB31CK-104X	CAPACITOR	0.1μF,16V
C3119	NCB31CK-104X	CAPACITOR	0.1μF,16V	C4205	NCB31EK-103X	CAPACITOR	0.01μF,25V
C3120	NEA70GM-337X	E CAPACITOR	330μF,4.0V	C4206	NCB31CK-104X	CAPACITOR	0.1μF,16V
C3121	NEA70GM-337X	E CAPACITOR	330μF,4.0V	C4207	NCB31EK-103X	CAPACITOR	0.01μF,25V
C3134	NDC31HJ-100X	CAPACITOR	10pF,50V	C4208	NCB31CK-104X	CAPACITOR	0.1μF,16V
C3135	NDC31HJ-221X	CAPACITOR	220pF,50V	C4209	NCF21CZ-105X	CAPACITOR	1μF,16V
C3501	NBE20JM-106X	T CAPACITOR	10μF,6.3V	C4210	NCF21CZ-105X	CAPACITOR	1μF,16V
C3502	NCF21CZ-105X	CAPACITOR	1μF,16V	C4251	NEA71HM-335X	E CAPACITOR	3.3μF,50V
C3503	NCB31EK-103X	CAPACITOR	0.01μF,25V	C4252	NCB31CK-104X	CAPACITOR	0.1μF,16V
C3504	NCB31EK-103X	CAPACITOR	0.01μF,25V	C4253	NCB31EK-153X	CAPACITOR	0.015μF,25V
C3505	NCB31EK-103X	CAPACITOR	0.01μF,25V	C4254	NCB31EK-153X	CAPACITOR	0.015μF,25V
C3506	NCB31EK-103X	CAPACITOR	0.01μF,25V	C4256	NEA71CM-106X	E CAPACITOR	10μF,16V
C3507	NCF21CZ-105X	CAPACITOR	1μF,16V	C4502	NEA71CM-106X	E CAPACITOR	10μF,16V
C3508	NCB31EK-153X	CAPACITOR	0.015μF,25V	C4503	NEA70JM-107X	E CAPACITOR	100μF,6.3V
C3509	NCB31EK-103X	CAPACITOR	0.01μF,25V	C4504	NCF31CZ-104X	CAPACITOR	0.1μF,16V
C3510	NCB31HK-332X	CAPACITOR	0.0033μF,50V	C4505	NDC31HJ-330X	CAPACITOR	33pF,50V
C3511	NDC31HJ-150X	CAPACITOR	15pF,50V	C4506	NCB31HK-102X	CAPACITOR	0.001μF,50V
C3513	NCB31HK-332X	CAPACITOR	0.0033μF,50V	C4507	NCB31HK-102X	CAPACITOR	0.001μF,50V
C3514	NCB31EK-103X	CAPACITOR	0.01μF,25V	C4508	NCB31HK-102X	CAPACITOR	0.001μF,50V
C3515	NCB31HK-332X	CAPACITOR	0.0033μF,50V	C4509	NCB31HK-102X	CAPACITOR	0.001μF,50V
C3517	NCB31EK-103X	CAPACITOR	0.01μF,25V	C4510	NCB31CK-104X	CAPACITOR	0.1μF,16V
C3518	NCB31HK-332X	CAPACITOR	0.0033μF,50V	C4511	NCF31CZ-104X	CAPACITOR	0.1μF,16V
C3520	NCB31HK-332X	CAPACITOR	0.0033μF,50V	C5203	NBE40GM-336X	T CAPACITOR	33μF,4.0V
C3522	NCB31EK-103X	CAPACITOR	0.01μF,25V	C5204	NCF31EZ-104X	CAPACITOR	0.1μF,25V
C3523	NCB31HK-332X	CAPACITOR	0.0033μF,50V	C5207	NCB31CK-104X	CAPACITOR	0.1μF,16V
C3524	NDC31HJ-150X	CAPACITOR	15pF,50V	C5208	NCB31CK-104X	CAPACITOR	0.1μF,16V
C3525	NCB31CK-473X	CAPACITOR	0.047μF,16V	C5209	NCB31CK-104X	CAPACITOR	0.1μF,16V
C3901	NCB31CK-104X	CAPACITOR	0.1μF,16V	C5210	NCF31EZ-104X	CAPACITOR	0.1μF,25V
C4004	NBE20GM-336X	T CAPACITOR	33μF,4.0V	C5211	NCB21CK-105X	CAPACITOR	1μF,16V
C4006	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5212	NCB21CK-105X	CAPACITOR	1μF,16V
C4008	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5213	NCB31HK-332X	CAPACITOR	0.0033μF,50V
C4009	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5214	NCB21CK-105X	CAPACITOR	1μF,16V
C4010	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5216	NCF31EZ-104X	CAPACITOR	0.1μF,25V
C4012	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5218	NCF31EZ-104X	CAPACITOR	0.1μF,25V
C4014	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5219	NBP21CM-685X	T CAPACITOR	6.8μF,16V
C4017	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5220	NCF31EZ-104X	CAPACITOR	0.1μF,25V
C4019	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5221	NBP41VM-105X	T CAPACITOR	1μF,35V
C4022	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5222	NCB31HK-104X	CAPACITOR	0.1μF,50V
C4024	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5223	NCF31EZ-104X	CAPACITOR	0.1μF,25V
C4028	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5224	NBE40GM-336X	T CAPACITOR	33μF,4.0V
C4029	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5225	NCF31EZ-104X	CAPACITOR	0.1μF,25V
C4030	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5227	NCB31CK-104X	CAPACITOR	0.1μF,16V
C4034	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5228	NCF31EZ-104X	CAPACITOR	0.1μF,25V
C4036	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5229	NBP41VM-105X	T CAPACITOR	1μF,35V
C4037	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5230	NCB21EK-104X	CAPACITOR	0.1μF,25V
C4038	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5232	NDC31HJ-100X	CAPACITOR	10pF,50V
C4039	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5233	NDC31HJ-100X	CAPACITOR	10pF,50V
C4040	NBE20GM-336X	T CAPACITOR,C,D,E	33μF,4.0V	C5234	NDC31HJ-100X	CAPACITOR	10pF,50V
C4041	NCF31EZ-104X	CAPACITOR,C,D,E	0.1μF,25V	C5235	NDC31HJ-100X	CAPACITOR	10pF,50V
C4043	NCF31EZ-104X	CAPACITOR,C,D,E	0.1μF,25V	C5236	NDC31HJ-100X	CAPACITOR	10pF,50V
C4044	NBE20GM-336X	T CAPACITOR	33μF,4.0V	C5237	NDC31HJ-100X	CAPACITOR	10pF,50V
C4045	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C6001	NCB21CK-105X	CAPACITOR	1μF,16V
C4046	NCF21CZ-105X	CAPACITOR	1μF,16V	C6003	NEA71CM-106X	E CAPACITOR	10μF,16V
C4047	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C6004	NCB31CK-104X	CAPACITOR	0.1μF,16V
C4048	NBE20GM-336X	T CAPACITOR	33μF,4.0V	C6005	NCB31CK-104X	CAPACITOR	0.1μF,16V
C4049	NDC31HJ-100X	CAPACITOR	10pF,50V	C6006	NCB31CK-473X	CAPACITOR	0.047μF,16V
C4049	NDC31HJ-100X	CAPACITOR	10pF,50V	C6007	NCF21CZ-105X	CAPACITOR	1μF,16V
C4050	NDC31HJ-100X	CAPACITOR,E	10pF,50V	C6008	NCB21CK-105X	CAPACITOR	1μF,16V

# △ REF No.	PART No.	PART NAME, DESCRIPTION		# △ REF No.	PART No.	PART NAME, DESCRIPTION	
C6009	NCB31EK-103X	CAPACITOR	0.01μF,25V	C8018	NCB31CK-104X	CAPACITOR,E	0.1μF,16V
C6010	NCF21CZ-105X	CAPACITOR	1μF,16V	C8019	NCB31CK-104X	CAPACITOR,E	0.1μF,16V
C6011	NCB31CK-104X	CAPACITOR	0.1μF,16V	C8020	NCB31CK-104X	CAPACITOR,E	0.1μF,16V
C6012	NCB31HK-272X	CAPACITOR	0.0027μF,50V	C8021	NCB31CK-104X	CAPACITOR,E	0.1μF,16V
C6013	NCB31CK-104X	CAPACITOR	0.1μF,16V	C8022	NCB31CK-104X	CAPACITOR,E	0.1μF,16V
C6014	NCB31HK-561X	CAPACITOR	560pF,50V	C8023	NCB31CK-104X	CAPACITOR,E	0.1μF,16V
C6015	NCB31HK-561X	CAPACITOR	560pF,50V	C8024	NCB31CK-104X	CAPACITOR,E	0.1μF,16V
C6016	NCB31EK-103X	CAPACITOR	0.01μF,25V	C8025	NBE50JM-107X	T CAPACITOR,E	100μF,6.3V
C6017	NDC31HJ-101X	CAPACITOR	100pF,50V	C8026	NCB31CK-104X	CAPACITOR,E	0.1μF,16V
C6018	NCB21CK-105X	CAPACITOR	1μF,16V	C8032	NCB31CK-104X	CAPACITOR,E	0.1μF,16V
C6019	NCF21CZ-105X	CAPACITOR	1μF,16V	C8033	NCB31CK-104X	CAPACITOR,E	0.1μF,16V
C6111	NCB21CK-105X	CAPACITOR	1μF,16V	C8034	NCB31CK-104X	CAPACITOR,E	0.1μF,16V
C6113	NCB10JK-106X	CAPACITOR	10μF,6.3V	C8035	NCB31CK-104X	CAPACITOR,E	0.1μF,16V
C6114	NCB31HK-102X	CAPACITOR	0.001μF,50V	C8036	NCB31CK-104X	CAPACITOR,E	0.1μF,16V
C6121	NCB21CK-105X	CAPACITOR	1μF,16V	C8037	NCB31CK-104X	CAPACITOR,E	0.1μF,16V
C6123	NCB10JK-106X	CAPACITOR	10μF,6.3V	C8038	NBE20JM-106X	T CAPACITOR,E	10μF,6.3V
C6124	NCB31HK-102X	CAPACITOR	0.001μF,50V	C8039	NCB31CK-104X	CAPACITOR,E	0.1μF,16V
C6125	NEA71CM-106X	E CAPACITOR	10μF,16V	C8040	NDC31HJ-270X	CAPACITOR,E	27pF,50V
C6131	NCB21CK-105X	CAPACITOR	1μF,16V	C8041	NBE20JM-106X	T CAPACITOR,E	10μF,6.3V
C6132	NCB21CK-105X	CAPACITOR	1μF,16V	C8042	NBE20JM-106X	T CAPACITOR,E	10μF,6.3V
C6133	NCB21EK-683X	CAPACITOR	0.068μF,25V	C8043	NBE20JM-106X	T CAPACITOR,E	10μF,6.3V
C6141	NCB21CK-105X	CAPACITOR	1μF,16V	C8044	NBE20JM-106X	T CAPACITOR,E	10μF,6.3V
C6142	NCB21CK-105X	CAPACITOR	1μF,16V	L101	NQL034K-330X	COIL	33μH
C6143	NCB21CK-224X	CAPACITOR	0.22μF,16V	L102	NQR0199-004X	FERRITE BEAD	
C6151	NCB21CK-105X	CAPACITOR	1μF,16V	L103	NQR0199-004X	FERRITE BEAD	
C6153	NCB10JK-106X	CAPACITOR	10μF,6.3V	L501	NQR0129-002X	FERRITE BEAD	
C6154	NCB31HK-472X	CAPACITOR	0.0047μF,50V	L502	NQR0129-002X	FERRITE BEAD,E	
C6155	NCB21CK-105X	CAPACITOR	1μF,16V	L2001	NQL144K-101X	COIL	100μH
C6161	NCB21CK-105X	CAPACITOR	1μF,16V	L2002	NQL144K-101X	COIL	100μH
C6162	NCB11EK-105X	CAPACITOR	1μF,25V	L2003	NQL144K-470X	COIL	47μH
C6163	NCB31HK-102X	CAPACITOR	0.001μF,50V	L2051	NQL093K-1R0X	COIL	1μH
C6164	NCB31EK-103X	CAPACITOR	0.01μF,25V	L2052	NQL093K-1R0X	COIL	1μH
C6165	NCB21CK-105X	CAPACITOR	1μF,16V	L2401	NQL144K-470X	COIL	47μH
C6167	NCB21CK-105X	CAPACITOR	1μF,16V	L3002	NQL315K-220X	COIL	22μH
C6168	NCB11EK-105X	CAPACITOR	1μF,25V	L3003	NQL315K-220X	COIL	22μH
C6169	NCB21CK-105X	CAPACITOR	1μF,16V	L3101	NQL315K-220X	COIL	22μH
C6171	NCB21CK-105X	CAPACITOR	1μF,16V	L3106	NQL085J-5R6X	COIL	5.6μH
C6173	NCB21CK-105X	CAPACITOR	1μF,16V	L3501	NQL315K-220X	COIL	22μH
C6174	NCB21CK-105X	CAPACITOR	1μF,16V	L3502	NQL315K-220X	COIL	22μH
C6175	NCB21CK-105X	CAPACITOR	1μF,16V	L3901	NQL085J-1R5X	COIL	1.5μH
C6201	NEA71CM-106X	E CAPACITOR	10μF,16V	L4001	NQL314K-220X	COIL	22μH
C7809	NBE41AM-106X	T CAPACITOR	10μF,10V	L4002	NRS181J-0R0X	MG RESISTOR	0Ω,1/8W
C7810	NDC31HJ-100X	CAPACITOR	10pF,50V	L4003	NQL314K-220X	COIL	22μH
C7811	NDC31HJ-100X	CAPACITOR	10pF,50V	L4004	NQL314K-220X	COIL,C,D,E	22μH
C7812	NDC31HJ-100X	CAPACITOR	10pF,50V	L4201	NQL315K-220X	COIL	22μH
C8001	NCB31CK-104X	CAPACITOR,E	0.1μF,16V	L4501	NQL315K-100X	COIL	10μH
C8002	NBE20JM-106X	T CAPACITOR,E	10μF,6.3V	L4502	NQL034K-220X	COIL	22μH
C8003	NCB31CK-104X	CAPACITOR,E	0.1μF,16V	L4503	NQL315K-220X	COIL	22μH
C8005	NCB31CK-104X	CAPACITOR,E	0.1μF,16V	L5201	NQL314K-220X	COIL	22μH
C8006	NCB31CK-104X	CAPACITOR,E	0.1μF,16V	L5202	NQL314K-101X	COIL	100μH
C8007	NCB31CK-104X	CAPACITOR,E	0.1μF,16V	L5203	NQL314K-101X	COIL	100μH
C8008	NCB31CK-104X	CAPACITOR,E	0.1μF,16V	L5204	NQL314K-220X	COIL	22μH
C8009	NCB31CK-104X	CAPACITOR,E	0.1μF,16V	L6001	NQLZ011-4R7X	COIL	4.7μH
C8010	NCB31CK-104X	CAPACITOR,E	0.1μF,16V	L6002	NQLZ011-4R7X	COIL	4.7μH
C8011	NCB31CK-104X	CAPACITOR,E	0.1μF,16V	L6111	NQLZ011-390X	COIL	39μH
C8012	NCB31CK-104X	CAPACITOR,E	0.1μF,16V	L6121	NQLZ011-390X	COIL	39μH
C8013	NCB31CK-104X	CAPACITOR,E	0.1μF,16V	L6131	NQLZ011-470X	COIL	47μH
C8014	NBE50JM-107X	T CAPACITOR,E	100μF,6.3V	L6141	NQLZ011-470X	COIL	47μH
C8015	NCB31CK-104X	CAPACITOR,E	0.1μF,16V	L6151	NQLZ011-470X	COIL	47μH
C8016	NCB31CK-104X	CAPACITOR,E	0.1μF,16V	L6161	NQLZ011-221X	COIL	220μH
C8017	NCB31HK-102X	CAPACITOR,E	0.001μF,50V	L7801	NQL144K-100X	COIL	10μH

# ▲ REF No.	PART No.	PART NAME, DESCRIPTION		# ▲ REF No.	PART No.	PART NAME, DESCRIPTION
	L8001	NQL024J-100X	COIL,E	10μH		
	L8002	NQL034K-150X	COIL,E	15μH		
	L8003	NQL024J-100X	COIL,E	10μH		
	L8004	NQL024J-100X	COIL,E	10μH		
	X101	NAX0251-001X	CRYSTAL RESONATOR			
	X102	NAX0325-001X	CRYSTAL RESONATOR			
	X3001	QAX0596-001	CRYSTAL RESONATOR			
	X8001	NAX0354-001X	RESONATOR,E			
	SW503	NSW0092-001X	SLIDE SWITCH			
	WR1	WJV0019-001B	E-PRIMARY WIRE			
	J501	QNS0082-001	2.5 JACK,E			
	J502	YQ32092-3	BATTERY TERMINAL UNIT			
	J503	PEMC1203	MINI JACK			
	J504	LY31356-002A	JACK UNIT			
	J505	QND0068-001	S JACK			
	CN1	QGF0507F1-10X	FPC CONNECTOR			
	CN2	QGF0510F2-14X	FPC CONNECTOR			
	CN3	QGF0507F1-18X	FPC CONNECTOR			
	CN4	QGA1201F2-02X	CONNECTOR			
	CN5	QGF0507F1-11X	FPC CONNECTOR			
	CN7	QGF0507F2-11X	FPC CONNECTOR			
	CN8	QGA1201C2-02X	CONNECTOR			
	CN12	QGA1201F2-05X	CONNECTOR			
	CN13	QGF0507F1-10X	FPC CONNECTOR,A,B,C,D			
		QGF0507F1-12X	FPC CONNECTOR,E			
	CN14	QGA1201C2-02X	CONNECTOR			
	CN15	QGF0512C1-22X	FPC CONNECTOR			
	CN16	QGF0303F1-27W	FFC/FPC CONNECTOR			
	CN18	QGF0510F2-14X	FPC CONNECTOR			
	CN22	QGF0505F2-14X	FPC CONNECTOR			
	CN25	QGB0801M1-20X	CONNECTOR			
	CN26	QGA1201C2-02X	CONNECTOR			
	CN27	QGA1201F2-02X	CONNECTOR			
▲	F6001	NMFZ006-2R0X-K	FUSE	T2.0A		
▲	F6003	NMFZ006-R50X-K	FUSE	T0.5A		
	OT1	LY41185-001B	SHIELD CASE(L)			
	SD1	LY41713-001A	SHIELD PLATE			
	SD2	LY41473-001A	SHIELD PLATE			

