

RIGOL

Programming Guide

RSA3000E Series Real-time Spectrum Analyzer

Sept. 2024
RIGOL TECHNOLOGIES CO., LTD.

Guaranty and Declaration

Copyright

© 2024 **RIGOL** TECHNOLOGIES CO., LTD. All Rights Reserved.

Trademark Information

RIGOL® is the trademark of **RIGOL** TECHNOLOGIES CO., LTD.

Publication Number

PGD24102-1110

Software Version

00.01.04

Software upgrade might change or add product features. Please acquire the latest version of the manual from **RIGOL** website or contact **RIGOL** to upgrade the software.

Notices

- **RIGOL** products are covered by P.R.C. and foreign patents, issued and pending.
- **RIGOL** reserves the right to modify or change parts of or all the specifications and pricing policies at the company's sole decision.
- Information in this publication replaces all previously released materials.
- Information in this publication is subject to change without notice.
- **RIGOL** shall not be liable for either incidental or consequential losses in connection with the furnishing, use, or performance of this manual, as well as any information contained.
- Any part of this document is forbidden to be copied, photocopied, or rearranged without prior written approval of **RIGOL**.

Product Certification

RIGOL guarantees that this product conforms to the national and industrial standards in China as well as the ISO9001:2015 standard and the ISO14001:2015 standard. Other international standard conformance certifications are in progress.

Contact Us

If you have any problem or requirement when using our products or this manual, please contact **RIGOL**.

E-mail: service@rigol.com

Website: www.rigol.com

Document Overview

This manual introduces how to program and control **RIGOL** RSA3000E series spectrum analyzer by using SCPI commands through USB and LAN interface.

Main Topics in this Manual:

Chapter 1 Programming Overview

This chapter introduces how to set up remote communication between the spectrum analyzer and the PC, the remote control methods, the syntax, symbols, parameters, and abbreviation rules of the SCPI commands.

Chapter 2 Command Systems for GPSA and RTSA Modes

This chapter introduces the syntax, function, parameters, and usage of each command of RSA3000E series in GPSA and RTSA modes.

Chapter 3 Command System for EMI Mode

This chapter introduces the commands of RSA3000E series in EMI mode.

Chapter 4 Command System for VSA Mode

This chapter introduces the commands of RSA3000E series in VSA mode.

Chapter 5 Programming Examples

This chapter illustrates how to control the RSA3000E series by programming in the development environments such as Visual C++, Visual Basic, and LabVIEW.

Tip

For the latest version of this manual, download it from the official website of **RIGOL** (www.rigol.com).

Format Conventions in this Manual:

1. Keys:

The keys on the front panel are usually denoted by the format of "Key Name (Bold) + Text Box". For example, **FREQ** denotes the **FREQ** key.

2. Menu keys:

The menu softkeys are usually denoted by the format of "Menu Word (Bold) + Character Shading". For example, **Center Freq** denotes the center frequency menu item under the **FREQ** function key.

3. Connectors:

The connectors on the front or rear panel are usually denoted by the format of "Connector Name (Bold) + Square Brackets (Bold)". For example, **[Gen Output 50Ω]**.

4. Operation Procedures:

"→" indicates the next step of operation. For example, **FREQ** → **Center Freq** indicates pressing **FREQ** on the front panel and then pressing the menu softkey **Center Freq**.

Content Conventions in this Manual:

The RSA3000E series spectrum analyzer includes the following models. Unless otherwise specified, this manual takes RSA3030E-TG as an example to illustrate the usage of each command of RSA3000E series spectrum analyzer.

Model	Frequency Range	Tracking Generator
RSA3030E	9 kHz to 3 GHz	None
RSA3015E	9 kHz to 1.5 GHz	None
RSA3030E-TG	9 kHz to 3 GHz	3 GHz
RSA3015E-TG	9 kHz to 1.5 GHz	1.5 GHz

Contents

Guaranty and Declaration	I
Document Overview	II
Chapter 1 Programming Overview	1-1
Build Remote Communication	1-2
Remote Control Method	1-3
SCPI Command Overview	1-4
Syntax	1-4
Symbol Description	1-4
Parameter Type	1-5
Command Abbreviation	1-5
Chapter 2 Command Systems for GPSA and RTSA Modes	2-1
:CALCulate Commands	2-2
:CALCulate:BANDwidth BWIDTH:NDB	2-4
:CALCulate:BANDwidth BWIDTH:RESult?	2-4
:CALCulate:BANDwidth BWIDTH:RLEft?	2-5
:CALCulate:BANDwidth BWIDTH:RRIGHT?	2-5
:CALCulate:BANDwidth BWIDTH[:STATe]	2-5
:CALCulate:LLINe:ALL:DELeTe	2-6
:CALCulate:LLINe:TEST	2-6
:CALCulate:LLINe<n>:AMPLitude:CMODE:RELative	2-7
:CALCulate:LLINe<n>:BUILd	2-7
:CALCulate:LLINe<n>:COPY	2-8
:CALCulate:LLINe<n>:DATA	2-8
:CALCulate:LLINe<n>:DELeTe	2-9
:CALCulate:LLINe<n>:DISPlay	2-9
:CALCulate:LLINe<n>:FAIL?	2-10
:CALCulate:LLINe<n>:FREQuency:CMODE:RELative	2-10
:CALCulate:LLINe<n>:MARGin	2-11
:CALCulate:LLINe<n>:MARGin:STATe	2-11
:CALCulate:LLINe<n>:TRACe	2-12
:CALCulate:LLINe<n>:TYPE	2-12
:CALCulate:MARKer:AOff	2-13
:CALCulate:MARKer:COUPle[:STATe]	2-13
:CALCulate:MARKer:PEAK:EXCURsion	2-13
:CALCulate:MARKer:PEAK:EXCURsion:STATe	2-14
:CALCulate:MARKer:PEAK:SEARch:MODE	2-14
:CALCulate:MARKer:PEAK:SORT	2-15
:TRACe:MATH:PEAK:SORT	2-15
:CALCulate:MARKer:PEAK:TABLE:READout	2-16
:TRACe:MATH:PEAK:THReshold	2-16
:CALCulate:MARKer:PEAK:TABLE[:STATe]	2-16
:TRACe:MATH:PEAK:TABLE:STATe	2-16
:CALCulate:MARKer:PEAK:THReshold	2-17
:CALCulate:MARKer:PEAK:THReshold:STATe	2-17
:CALCulate:MARKer:TABLE[:STATe]	2-18
:CALCulate:MARKer:TRCKing[:STATe]	2-18
:CALCulate:MARKer<n>:CPSeArch[:STATe]	2-19
:CALCulate:MARKer<n>:FCOunt:GATetime	2-20
:CALCulate:MARKer<n>:FCOunt:GATetime:AUTO	2-20
:CALCulate:MARKer<n>:FCOunt[:STATe]	2-21
:CALCulate:MARKer<n>:FCOunt:X?	2-21
:CALCulate:MARKer<n>:FUNCTion	2-22
:CALCulate:MARKer<n>:FUNCTion:BAND:LEFT	2-22

:CALCulate:MARKer<n>:FUNCTION:BAND:RIGHT	2-23
:CALCulate:MARKer<n>:FUNCTION:BAND:SPAN	2-24
:CALCulate:MARKer<n>:FUNCTION:BAND:SPAN:AUTO	2-24
:CALCulate:MARKer<n>:LINEs[:STATE]	2-25
:CALCulate:MARKer<n>:MAXimum:LEFT	2-25
:CALCulate:MARKer<n>:MAXimum[:MAX]	2-26
:CALCulate:MARKer<n>:MAXimum:NEXT	2-26
:CALCulate:MARKer<n>:MAXimum:RIGHT	2-27
:CALCulate:MARKer<n>:MINimum	2-27
:CALCulate:MARKer<n>:MODE	2-28
:CALCulate:MARKer<n>:PTPeak	2-28
:CALCulate:MARKer<n>:REFERENCE	2-29
:CALCulate:MARKer<n>[:SET]:CENTER	2-29
:CALCulate:MARKer<n>[:SET]:DELTA:CENTER	2-30
:CALCulate:MARKer<n>[:SET]:DELTA:SPAN	2-30
:CALCulate:MARKer<n>[:SET]:RLEVEL	2-31
:CALCulate:MARKer<n>[:SET]:START	2-31
:CALCulate:MARKer<n>[:SET]:STEP	2-32
:CALCulate:MARKer<n>[:SET]:STOP	2-32
:CALCulate:MARKer<n>:STATE	2-33
:CALCulate:MARKer<n>:TRACE	2-33
:CALCulate:MARKer<n>:TRACE:AUTO	2-34
:CALCulate:MARKer<n>:X	2-35
:CALCulate:MARKer<n>:X:READout	2-35
:CALCulate:MARKer<n>:X:READout:AUTO	2-36
:CALCulate:MARKer<n>:Y	2-37
:CALCulate:MARKer<n>:Z:POSITION	2-37
:CALCulate:MATH	2-38
:CALCulate:NTData[:STATE]	2-39
:CALibration Commands	2-40
:CALibration:[ALL]	2-40
:CALibration:AUTO	2-40
:CONFigure Commands	2-41
:CONFigure?	2-41
:CONFigure:ACPower	2-42
:CONFigure:CNRatio	2-42
:CONFigure:DENSITY	2-42
:CONFigure:DSPECTrogram	2-43
:CONFigure:EBWidth	2-43
:CONFigure:HDIST	2-43
:CONFigure:LPStep	2-43
:CONFigure:MCHPower	2-44
:CONFigure:NORMAL	2-44
:CONFigure:OBWidth	2-44
:CONFigure:PSGRam	2-45
:CONFigure:PSpectrum	2-45
:CONFigure:PVT	2-45
:CONFigure:SANalyzer	2-45
:CONFigure:SPECTrogram	2-46
:CONFigure:TOI	2-46
:CONFigure:TPOWER	2-46
:COUPle Command	2-47
:COUPle	2-47
:DISPlay Commands	2-48
:DISPlay:BACKlight	2-49
:DISPlay:ENABLE	2-49
:DISPlay:GRATICule[:STATE]	2-50
:DISPlay:HDMI[:STATE]	2-50

:DISPlay:PVTime:WINDow:TRACe:X[:SCALE]:COUPle	2-51
:DISPlay:PVTime:WINDow:TRACe:X[:SCALE]:PDIVision	2-51
:DISPlay:PVTime:WINDow:TRACe:X[:SCALE]:RLEVel	2-52
:DISPlay:PVTime:WINDow:TRACe:X[:SCALE]:RPOSition	2-52
:DISPlay:PVTime:WINDow:TRACe:Y[:SCALE]:PDIVision	2-53
:DISPlay:PVTime:WINDow:TRACe:Y[:SCALE]:RLEVel <real>	2-53
:DISPlay:VIEW:DENSity:AADJust	2-54
:DISPlay:VIEW:DENSity:CNONlinear	2-54
:DISPlay:VIEW:DENSity:CPALettes.....	2-55
:DISPlay:VIEW:DENSity:HDHue	2-55
:DISPlay:VIEW:DENSity:LDHue	2-56
:DISPlay:VIEW:DENSity:PERsistence	2-56
:DISPlay:VIEW:DENSity:PERsistence:INFinite.....	2-57
:DISPlay:VIEW[:SElect].....	2-57
:DISPlay:VIEW:SPECtrogram:AADJust.....	2-58
:DISPlay:VIEW:SPECtrogram:BOTTom	2-58
:DISPlay:VIEW:SPECtrogram:HUE	2-59
:DISPlay:VIEW:SPECtrogram:POSition	2-59
:DISPlay:VIEW:SPECtrogram:REFerence	2-60
:DISPlay:VIEW:SPECtrogram:TRACe:COUPle	2-60
:DISPlay:VIEW:SPECtrogram:TRACe:SElection.....	2-61
:DISPlay:WINDow:SElect	2-62
:DISPlay:WINDow:TRACe:Y:DLINe	2-62
:DISPlay:WINDow:TRACe:Y:DLINe:STATe	2-63
:DISPlay:WINDow:TRACe:Y[:SCALE]:NRLevel	2-63
:DISPlay:WINDow:TRACe:Y[:SCALE]:NRPosition	2-64
:DISPlay:WINDow:TRACe:Y[:SCALE]:PDIVision	2-64
:DISPlay:WINDow:TRACe:Y[:SCALE]:RLEVel	2-65
:DISPlay:WINDow:TRACe:Y[:SCALE]:RLEVel:OFFSet	2-65
:DISPlay:WINDow:TRACe:Y[:SCALE]:SPACing	2-66
:FETCh Commands.....	2-67
:FETCh:ACPower?	2-68
:FETCh:ACPower:LOWer?	2-68
:FETCh:ACPower:MAIN?	2-69
:FETCh:ACPower:UPPer?	2-69
:FETCh:CNRatio?	2-70
:FETCh:CNRatio:CARRier?	2-70
:FETCh:CNRatio:CNRatio?	2-71
:FETCh:CNRatio:NOISe?	2-71
:FETCh:EBWidth?	2-72
:FETCh:HARMonics:AMPLitude:ALL?	2-72
:FETCh:HARMonics:AMPLitude? <n>	2-73
:FETCh:HARMonics[:DISTortion]?	2-73
:FETCh:HARMonics:FREQuency:ALL?	2-74
:FETCh:HARMonics:FREQuency? <n>	2-74
:FETCh:HARMonics:FUNDamental?	2-75
:FETCh:OBWidth?	2-75
:FETCh:OBWidth:OBWidth?	2-76
:FETCh:OBWidth:OBWidth:FERRor?	2-76
:FETCh:SANalyzer<n>?	2-77
:FETCh:TOIntercept?	2-77
:FETCh:TOIntercept:IP3?	2-78
:FETCh:TPOWER?.....	2-78
:FORMat Commands	2-79
:FORMat:BORDER	2-79
:FORMat[:TRACe][:DATA]	2-80
IEEE 488.2 Common Commands	2-81
*CLS.....	2-82

*ESE	2-82
*ESR?	2-83
*IDN?	2-83
*OPC.....	2-84
*RCL	2-84
*RST	2-84
*SAV	2-85
*SRE	2-85
*STB?	2-86
*TRG.....	2-86
*TST?	2-86
*WAI.....	2-86
:INITiate Commands.....	2-87
:INITiate:CONTinuous	2-87
:INITiate[:IMMediate]	2-87
:INSTrument Commands	2-88
:INSTrument:COUPle:FREQuency:CENTer	2-88
:INSTrument:DEFault	2-88
:INSTrument:NSElect.....	2-89
:INSTrument[:SElect]	2-89
:MMEMory Commands	2-90
:MMEMory:DELeTe.....	2-90
:MMEMory:LOAD:CORRection	2-91
:MMEMory:LOAD:FMT	2-91
:MMEMory:LOAD:LIMit	2-91
:MMEMory:LOAD:STATe.....	2-92
:MMEMory:LOAD:TRACe.....	2-92
:MMEMory:LOAD:TRACe:DATA.....	2-93
:MMEMory:MOVE	2-93
:MMEMory:STORE:CORRection.....	2-93
:MMEMory:STORE:LIMit.....	2-94
:MMEMory:STORE:MTABLE	2-94
:MMEMory:STORE:PTABLE	2-95
:MMEMory:STORE:RESults	2-95
:MMEMory:STORE:SCReen.....	2-96
:MMEMory:STORE:STATe	2-96
:MMEMory:STORE:TRACe	2-97
:MMEMory:STORE:TRACe:DATA	2-97
:OUTPut Command.....	2-98
:OUTPut[:EXTeRnal][:STATe]	2-98
:READ Commands	2-99
:READ:ACPower?	2-100
:READ:ACPower:LOWer?	2-100
:READ:ACPower:MAIN?	2-100
:READ:ACPower:UPPer?.....	2-101
:READ:CNRatio?.....	2-101
:READ:CNRatio:CARRier?	2-101
:READ:CNRatio:CNRatio?	2-102
:READ:CNRatio:NOISe?	2-102
:READ:EBWidth?	2-102
:READ:HARMonics:AMPLitude:ALL?	2-103
:READ:HARMonics:AMPLitude? <n>	2-103
:READ:HARMonics[:DISTortion]?	2-104
:READ:HARMonics:FREQuency:ALL?	2-104
:READ:HARMonics:FREQuency? <n>	2-104
:READ:HARMonics:FUNDamental?	2-105
:READ:OBWidth?.....	2-105
:READ:OBWidth:OBWidth?	2-106

:READ:OBWidth:OBWidth:FERRor?	2-106
:READ:SANalyzer<n>?	2-107
:READ:TOIntercept?	2-107
:READ:TOIntercept:IP3?	2-108
:READ:TPOWer?	2-108
[[:SENSe] Commands	2-109
[:SENSe]:ACPower:AVERage:COUNT	2-113
[:SENSe]:ACPower:AVERage[:STATe]	2-113
[:SENSe]:ACPower:AVERage:TCONtrol	2-114
[:SENSe]:ACPower:BANDwidth:ACHannel	2-114
[:SENSe]:ACPower:BANDwidth:INTEgration	2-115
[:SENSe]:ACPower:CSPacing	2-115
[:SENSe]:ACQuisition:TIME	2-116
[:SENSe]:ACQuisition:TIME:AUTO	2-116
[:SENSe]:ACQuisition:TIME:PVTime	2-117
[:SENSe]:ACQuisition:TIME:PVTime:AUTO	2-117
[:SENSe]:AVERage:COUNT	2-118
:TRACE:AVERage:COUNT	2-118
[:SENSe]:AVERage:COUNT:CURRent?	2-119
:TRACE:AVERage:COUNT:CURRent?	2-119
[:SENSe]:AVERage:TYPE	2-119
:TRACE<n>:AVERage:TYPE	2-119
[:SENSe]:AVERage:TYPE:AUTO	2-120
[:SENSe]:BANDwidth BWIDth:EMIFilter:STATe	2-120
[:SENSe]:BANDwidth BWIDth[:RESolution]	2-121
[:SENSe]:BANDwidth BWIDth[:RESolution]:AUTO	2-121
[:SENSe]:BANDwidth BWIDth[:RESolution]:SElect	2-122
[:SENSe]:BANDwidth BWIDth[:RESolution]:SElect:AUTO[:STATe]	2-122
[:SENSe]:BANDwidth BWIDth:SHAPE	2-123
[:SENSe]:BANDwidth BWIDth:VIDeo	2-124
[:SENSe]:BANDwidth BWIDth:VIDeo:AUTO	2-124
[:SENSe]:BANDwidth BWIDth:VIDeo:RATio	2-125
[:SENSe]:BANDwidth BWIDth:VIDeo:RATio:AUTO	2-125
[:SENSe]:CNRatio:AVERage:COUNT	2-126
[:SENSe]:CNRatio:AVERage[:STATe]	2-126
[:SENSe]:CNRatio:AVERage:TCONtrol	2-127
[:SENSe]:CNRatio:BANDwidth:INTEgration	2-128
[:SENSe]:CNRatio:BANDwidth:NOISE	2-128
[:SENSe]:CNRatio:OFFSet	2-129
[:SENSe]:CORRection:CSET:ALL:DELeTe	2-129
[:SENSe]:CORRection:CSET:ALL[:STATe]	2-129
[:SENSe]:CORRection:CSET<n>:DATA	2-130
[:SENSe]:CORRection:CSET<n>:DATA:MERGe	2-131
[:SENSe]:CORRection:CSET<n>:DELeTe	2-131
[:SENSe]:CORRection:CSET<n>[:STATe]	2-132
[:SENSe]:CORRection:CSET<n>:X:SPACing	2-132
:INPut:IMPedance	2-133
[:SENSe]:CORRection:IMPedance[:INPut][:MAGNitude]	2-133
[:SENSe]:CORRection:SA[:RF]:GAIN	2-133
[:SENSe]:DEMod	2-134
[:SENSe]:DEMod:GAIN:AUTO	2-134
[:SENSe]:DEMod:GAIN:INCRement	2-135
[:SENSe]:DEMod:STATe	2-136
[:SENSe]:DETector:TRACE:PVTime	2-136
[:SENSe]:DETector[:FUNction]	2-137
[:SENSe]:DETector:TRACE<n>	2-137
[:SENSe]:DETector:TRACE<n>:AUTO	2-138
[:SENSe]:EBWidth:AVERage:COUNT	2-138

[:SENSe]:EBWidth:AVERage[:STATe]	2-139
[:SENSe]:EBWidth:AVERage:TCONtrol	2-139
[:SENSe]:EBWidth:FREQuency:SPAN	2-140
[:SENSe]:EBWidth:MAXHold:STATe	2-140
[:SENSe]:EBWidth:XDB	2-141
[:SENSe]:FCAPture:BLOCK	2-141
[:SENSe]:FCAPture:LENGth	2-142
[:SENSe]:FCAPture:POINter	2-143
[:SENSe]:FCAPture:WLENGth?	2-143
[:SENSe]:FETCh:FCAPture?	2-143
[:SENSe]:INITiate:FCAPture	2-144
[:SENSe]:FREQuency:CENTer	2-144
[:SENSe]:FREQuency:CENTer:STEP:AUTO	2-145
[:SENSe]:FREQuency:CENTer:STEP[:INCRement]	2-145
[:SENSe]:FREQuency:OFFSet	2-146
[:SENSe]:FREQuency:SPAN	2-146
[:SENSe]:FREQuency:SPAN:BANDwidth[:RESolution]:RATio	2-147
[:SENSe]:FREQuency:SPAN:BANDwidth[:RESolution]:RATio:AUTO	2-147
[:SENSe]:FREQuency:SPAN:FULL	2-148
[:SENSe]:FREQuency:SPAN:PREVious	2-148
[:SENSe]:FREQuency:SPAN:ZERO	2-148
[:SENSe]:FREQuency:STARt	2-148
[:SENSe]:FREQuency:STOP	2-149
[:SENSe]:FREQuency:TUNE:IMMediate	2-149
[:SENSe]:HDISt:AVERage:COUNT	2-150
[:SENSe]:HDISt:AVERage[:STATe]	2-150
[:SENSe]:HDISt:AVERage:TCONtrol	2-151
[:SENSe]:HDISt:NUMBers	2-151
[:SENSe]:HDISt:TIME	2-152
[:SENSe]:MCHPower:AVERage:COUNT	2-153
[:SENSe]:MCHPower:AVERage[:STATe]	2-153
[:SENSe]:MCHPower:AVERage:TCONtrol	2-154
[:SENSe]:MCHPower:FREQuency:CENTer	2-154
[:SENSe]:MCHPower:CHAnnel:ADD	2-155
[:SENSe]:MCHPower:CHAnnel:DATA:NEW	2-155
[:SENSe]:MCHPower:CHAnnel:DATA	2-156
[:SENSe]:MCHPower:CHAnnel:DATA?	2-156
[:SENSe]:MCHPower:CHAnnel:DELeTe	2-157
[:SENSe]:MCHPower:CHAnnel:DELeTe:ALL	2-157
[:SENSe]:MCHPower:CHAnnel:RESult?	2-157
[:SENSe]:MCHPower:FREQuency:SPAN	2-158
[:SENSe]:MCHPower:SHeet	2-159
[:SENSe]:OBWidth:AVERage:COUNT	2-159
[:SENSe]:OBWidth:AVERage[:STATe]	2-160
[:SENSe]:OBWidth:AVERage:TCONtrol	2-160
[:SENSe]:OBWidth:FREQuency:SPAN	2-161
[:SENSe]:OBWidth:MAXHold:STATe	2-161
[:SENSe]:OBWidth:PERCent	2-162
[:SENSe]:POWer[:RF]:ATTenuation	2-162
[:SENSe]:POWer[:RF]:ATTenuation:AUTO	2-163
[:SENSe]:POWer[:RF]:GAIN[:STATe]	2-163
[:SENSe]:POWer[:RF]:MIXer:RANGe[:UPPer]	2-164
[:SENSe]:SIGCapture:2FSK:AMPDown	2-164
[:SENSe]:SIGCapture:2FSK:AMPUp	2-165
[:SENSe]:SIGCapture:2FSK:MARK1:FREQ	2-165
[:SENSe]:SIGCapture:2FSK:MARK1:SWitch[:STATe]	2-166
[:SENSe]:SIGCapture:2FSK:MARK2:FREQ	2-166
[:SENSe]:SIGCapture:2FSK:MARK2:SWitch[:STATe]	2-167

[:SENSe]:SIGCapture:2FSK:MAXHold[:STATe]	2-168
[:SENSe]:SIGCapture:2FSK:PEAKAmp?	2-168
[:SENSe]:SIGCapture:2FSK:PEAKFreq?	2-169
[:SENSe]:SIGCapture:2FSK:PF?	2-169
[:SENSe]:SIGCapture:2FSK:PFSWitch[:STATe]	2-169
[:SENSe]:SIGCapture:2FSK:RESet	2-170
[:SENSe]:SIGCapture:2FSK:SIGNAL	2-170
[:SENSe]:SWEep:POINts	2-171
[:SENSe]:SWEep:TIME	2-171
[:SENSe]:SWEep:TIME:AUTO	2-172
[:SENSe]:SWEep:TIME:AUTO:RULEs	2-172
[:SENSe]:TOI:AVERAge:COUNt	2-173
[:SENSe]:TOI:AVERAge[:STATe]	2-173
[:SENSe]:TOI:AVERAge:TCONtrol	2-174
[:SENSe]:TOI:FREQuency:SPAN	2-174
[:SENSe]:TPOWer:AVERAge:COUNt	2-175
[:SENSe]:TPOWer:AVERAge[:STATe]	2-176
[:SENSe]:TPOWer:AVERAge:TCONtrol	2-176
[:SENSe]:TPOWer:LLIMit	2-177
[:SENSe]:TPOWer:MODE	2-177
[:SENSe]:TPOWer:RLIMit	2-178
[:SENSe]:VSWR:FREFlect	2-178
[:SENSe]:VSWR:NREFlect	2-179
[:SENSe]:VSWR:RESet	2-179
[:SENSe]:VSWR:STATe	2-179
:SOURce Commands	2-180
:SOURce:CORRection:OFFSet	2-180
:SOURce[:EXTernal]:POWer[:LEVel][:IMMediate][:AMPLitude]	2-180
:SOURce:TRACe:REFerence:STATe	2-181
:SOURce:TRACe:STORref	2-181
:STATus Commands	2-182
:STATus:OPERation:CONDition?	2-183
:STATus:OPERation:ENABLE	2-183
:STATus:OPERation[:EVENT]?	2-184
:STATus:PRESet	2-184
:STATus:QUEStionable:CONDition?	2-184
:STATus:QUEStionable:ENABLE	2-184
:STATus:QUEStionable[:EVENT]?	2-185
:SYSTem Commands	2-186
:SYSTem:BEEPer:STATe	2-187
:SYSTem:COMMunicate:LAN[:SELF]:APPLY	2-187
:SYSTem:COMMunicate:LAN[:SELF]:AUToip:STATe	2-187
:SYSTem:COMMunicate:LAN[:SELF]:DHCP:STATe	2-188
:SYSTem:COMMunicate:LAN[:SELF]:IP:ADDress	2-188
:SYSTem:COMMunicate:LAN[:SELF]:IP:DNS:AUTO[:STATe]	2-189
:SYSTem:COMMunicate:LAN[:SELF]:IP:DNSBack	2-189
:SYSTem:COMMunicate:LAN[:SELF]:IP:DNSPreferred	2-190
:SYSTem:COMMunicate:LAN[:SELF]:IP:DNSServer	2-190
:SYSTem:COMMunicate:LAN[:SELF]:IP:GATeway	2-191
:SYSTem:COMMunicate:LAN[:SELF]:IP:SUBMask	2-191
:SYSTem:COMMunicate:LAN[:SELF]:MANuip:STATe	2-192
:SYSTem:COMMunicate:LAN[:SELF]:MDNS:STATe	2-192
:SYSTem:COMMunicate:LAN[:SELF]:RESet	2-193
:SYSTem:CONFigure:INFormation?	2-193
:SYSTem:DATE	2-193
:SYSTem:FSWitch[:STATe]	2-194
:SYSTem:LANGuage	2-194
:SYSTem:LKEY	2-195

:SYSTem:OPTion:STATe?	2-195
:SYSTem:PON:TYPE	2-196
:SYSTem:PRESet	2-196
:SYSTem:PRESet:SAVE	2-196
:SYSTem:PRESet:TYPE	2-197
:SYSTem:PRESet:USER:SAVE	2-197
:SYSTem:SCPI:DISPlay	2-197
:SYSTem:SECurity:CLEar	2-198
:SYSTem:SHOW	2-198
:SYSTem:TIME	2-199
:TRACe Commands	2-200
:TRACe:CLEar:ALL	2-200
:TRACe[:DATA]	2-200
:TRACe:MATH:A	2-202
:TRACe:MATH:B	2-202
:TRACe:MATH:CONST	2-203
:TRACe:MATH:PEAK[:DATA]?	2-203
:TRACe:MATH:PEAK:POINts?	2-203
:TRACe:MATH:REFerence	2-204
:TRACe:MATH:STATe	2-204
:TRACe:MATH:TYPE	2-205
:TRACe:PRESet:ALL	2-205
:TRACe<n>:DISPlay:STATe	2-206
:TRACe<n>:MODE	2-206
:TRACe<n>:TYPE	2-206
:TRACe<n>:UPDate:STATe	2-207
:TRIGger Commands	2-208
:TRIGger[:SEQuence]:ATRigger	2-209
:TRIGger[:SEQuence]:ATRigger:STATe	2-209
:TRIGger[:SEQuence]:EXTernal<n>:DELay	2-210
:TRIGger[:SEQuence]:EXTernal<n>:DELay:STATe	2-210
:TRIGger[:SEQuence]:EXTernal<n>:SLOPe	2-211
:TRIGger[:SEQuence]:FMT:APTRigger	2-211
:TRIGger[:SEQuence]:FMT:CRITeria	2-212
:TRIGger[:SEQuence]:FMT:DELay	2-212
:TRIGger[:SEQuence]:FMT:DELay:STATe	2-213
:TRIGger[:SEQuence]:FMT:MASK	2-213
:TRIGger[:SEQuence]:FMT:MASK:EDIT	2-214
:TRIGger[:SEQuence]:FMT:MASK:RELative:AMPLitude	2-215
:TRIGger[:SEQuence]:FMT:MASK:RELative:FREQuency	2-215
:TRIGger[:SEQuence]:FMT:MASK<n>:BUILd	2-216
:TRIGger[:SEQuence]:FMT:MASK<n>:DATA	2-216
:TRIGger[:SEQuence]:FMT:MASK<n>:DELete	2-217
:TRIGger[:SEQuence]:FMT:MASK<n>:NEW	2-217
:TRIGger[:SEQuence]:HOLDoff	2-218
:TRIGger[:SEQuence]:HOLDoff:STATe	2-218
:TRIGger[:SEQuence]:SOURce	2-219
:TRIGger[:SEQuence]:VIDeo:DELay	2-219
:TRIGger[:SEQuence]:VIDeo:DELay:STATe	2-220
:TRIGger[:SEQuence]:VIDeo:LEVel	2-220
:TRIGger[:SEQuence]:VIDeo:SLOPe	2-221
:TRIGger2:MODE	2-221
:UNIT Command	2-223
:UNIT:POWer	2-223
Chapter 3 Command System for EMI Mode	3-1
:CALCulate Commands	3-2
:CALCulate:EMI:SLIST:DELete	3-4

:CALCulate:FSCan:MAMarker[:SET]:SLIST	3-4
:CALCulate:FSCan:MARKer:AOff	3-4
:CALCulate:FSCan:MARKer:COUPle[:STATE]	3-4
:CALCulate:FSCan:MARKer:PEAK:EXCursion	3-5
:CALCulate:FSCan:MARKer:PEAK:EXCursion:STATE	3-5
:CALCulate:FSCan:MARKer:PEAK:SEARch:MODE	3-6
:CALCulate:FSCan:MARKer:PEAK:SEARch:THReshold	3-7
:CALCulate:FSCan:MARKer:PEAK:SEARch:THReshold:STATE	3-7
:CALCulate:FSCan:MARKer<n>:FUNction:MAMarker?	3-8
:CALCulate:FSCan:MARKer<n>:MAXimum	3-8
:CALCulate:FSCan:MARKer<n>:MAXimum:LEFT	3-8
:CALCulate:FSCan:MARKer<n>:MAXimum:NEXT	3-9
:CALCulate:FSCan:MARKer<n>:MAXimum:RIGHT	3-9
:CALCulate:FSCan:MARKer<n>:MINimum	3-10
:CALCulate:FSCan:MARKer<n>:MODE	3-10
:CALCulate:FSCan:MARKer<n>:REference	3-11
:CALCulate:FSCan:MARKer<n>[:SET]:SLIST	3-11
:CALCulate:FSCan:MARKer<n>[:SET]:METer	3-11
:CALCulate:FSCan:MARKer<n>:TO:METer	3-12
:CALCulate:FSCan:MARKer<n>:TRACe	3-12
:CALCulate:FSCan:SLIST:APPend:METer	3-13
:CALCulate:FSCan:SLIST:DELeTe:SIGNal	3-13
:CALCulate:FSCan:SLIST:MARK:ALL	3-13
:CALCulate:FSCan:SLIST:MARK:CLEar:ALL	3-13
:CALCulate:FSCan:SLIST:MARK:CLEar:SIGNal	3-13
:CALCulate:FSCan:SLIST:MARK:SIGNal	3-14
:CALCulate:FSCan:SLIST:REPLace:METer	3-14
:CALCulate:FSCan:SLIST:SET:METer	3-14
:CALCulate:FSCan:SLIST:SORT:AUTO	3-15
:CALCulate:FSCan:SLIST:SORT:DAMPlitude	3-15
:CALCulate:FSCan:SLIST:SORT:DLDelta	3-16
:CALCulate:FSCan:SLIST:SORT:ORDER	3-16
:CALCulate:FSCan:SLIST:SORT:TYPE	3-17
:CALCulate:FSCan:SLIST:ZOOM	3-17
:CALCulate:FSCan:SLIST:ZOOM:OUT	3-18
:CALCulate:LLIne:ALL:DELeTe	3-18
:CALCulate:LLIne:TEST	3-18
:CALCulate:LLIne<n>:AMPLitude:CMODE:RELative	3-18
:CALCulate:LLIne<n>:BUIld	3-19
:CALCulate:LLIne<n>:CONTRol:INTERpolate:TYPE	3-19
:CALCulate:LLIne<n>:COPY	3-20
:CALCulate:LLIne<n>:DATA	3-20
:CALCulate:LLIne<n>:DELeTe	3-21
:CALCulate:LLIne<n>:DISPlay	3-21
:CALCulate:LLIne<n>:FAIL?	3-22
:CALCulate:LLIne<n>:FREQuency:CMODE:RELative	3-22
:CALCulate:LLIne<n>:MARGin	3-23
:CALCulate:LLIne<n>:MARGin:STATE	3-23
:CALCulate:LLIne<n>:OFFSet:X	3-24
:CALCulate:LLIne<n>:OFFSet:Y	3-24
:CALCulate:LLIne<n>:TRACe	3-25
:CALCulate:MARKer:PEAK:SEARch:THReshold:LINE	3-25
:CALCulate:MARKer<n>:LINes[:STATE]	3-26
:CALCulate:MARKer<n>:STATE	3-26
:CALCulate:MARKer<n>:X	3-27
:CALCulate:MARKer<n>:Y?	3-27
:CALCulate:METER:LIMit:ALL:FAIL?	3-28
:CALCulate:METER:POWER[:CURRent]?	3-28

:CALCulate:METER:POWER:PEAK?	3-28
:CALCulate:METER<n>:LIMIT[:DATA]	3-29
:CALCulate:METER<n>:LIMIT:FAIL?	3-29
:CALCulate:METER<n>:LIMIT:STATE	3-30
:CALibration Commands	3-31
:CALibration:[ALL]	3-31
:CALibration:AUTO	3-31
:COUPle Command	3-32
:COUPle	3-32
:CONFigure Command	3-33
:CONFigure?	3-33
:CONFigure:FSCan	3-33
:DISPlay Commands	3-34
:DISPlay:BACKlight	3-35
:DISPlay:ENABLE	3-35
:DISPlay:FSCan:VIEW:METER:FLINE	3-36
:DISPlay:FSCan:VIEW:METER[:STATE]	3-36
:DISPlay:FSCan:VIEW:WINDOW:TRACE:Y[:SCALE]:PDIVision	3-37
:DISPlay:FSCan:VIEW:WINDOW:TRACE:Y[:SCALE]:RLEVEL	3-37
:DISPlay:FSCan:VIEW:WINDOW:TRACE:Y[:SCALE]:RLEVEL:OFFSet	3-38
:DISPlay:FSCan:WINDOW:MAMarker[:STATE]	3-38
:DISPlay:GRATICule[:STATE]	3-39
:DISPlay:HDMI[:STATE]	3-39
:DISPlay:METER<n>[:STATE]	3-40
:DISPlay:VIEW:WINDOW:TRACE:X:SPACing	3-40
:DISPlay:WINDOW:TRACE:Y:DLINe	3-41
:DISPlay:WINDOW:TRACE:Y:DLINe:STATE	3-41
:DISPlay[:WINDOW]:TRACE<n>:MODE	3-42
:FETCh Command	3-43
:FETCh:FSCan?	3-43
:FORMat Commands	3-44
:FORMat:BORDER	3-44
:FORMat[:TRACE][:DATA]	3-44
IEEE 488.2 Common Commands	3-46
:INITiate Commands	3-47
:INITiate:FSCan:CLEAR:IMMediate	3-47
:INITiate:PAUSE	3-47
:INITiate:RESume	3-47
:INITiate1:CONTinuous	3-47
:INITiate2:CONTinuous	3-48
:INITiate2:IMMediate	3-48
:INITiate2:REStart	3-48
:INSTrument Commands	3-49
:INSTrument:COUPle:FREQuency:CENTer	3-49
:INSTrument:DEFault	3-49
:INSTrument:NSElect	3-50
:INSTrument[:SElect]	3-50
:MMEMory Commands	3-51
:MMEMory:DELeTe	3-52
:MMEMory:LOAD:CORRection	3-52
:MMEMory:LOAD:LIMit	3-52
:MMEMory:LOAD:SCAN	3-53
:MMEMory:LOAD:SLISt	3-53
:MMEMory:LOAD:STATE	3-54
:MMEMory:LOAD:TRACE	3-54
:MMEMory:LOAD:TRACE:DATA	3-54
:MMEMory:MOVE	3-55
:MMEMory:STORe:CORRection	3-55

:MMEMory:STORe:LIMit	3-56
:MMEMory:STORe:SCAN	3-56
:MMEMory:STORe:SCReen	3-56
:MMEMory:STORe:SLISt.....	3-57
:MMEMory:STORe:STATe.....	3-57
:MMEMory:STORe:TRACe.....	3-58
:MMEMory:STORe:TRACe:DATA.....	3-58
[[:SENSe] Commands	3-59
[:SENSe]:AVERAge:COUNT	3-61
[:SENSe]:AVERAge:TYPE.....	3-61
[:SENSe]:AVERAge:TYPE:AUTO	3-62
[:SENSe]:BANDwidth BWIDth:EMIFilter:STATe	3-62
[:SENSe]:BANDwidth BWIDth[:RESolution]	3-63
[:SENSe]:BANDwidth BWIDth[:RESolution]:AUTO	3-63
[:SENSe]:CORRection:CSET:ALL:DELeTe.....	3-64
[:SENSe]:CORRection:CSET:ALL[:STATe].....	3-64
[:SENSe]:CORRection:CSET<n>:DATA.....	3-65
[:SENSe]:CORRection:CSET<n>:DATA:MERGe	3-65
[:SENSe]:CORRection:CSET<n>:DELeTe	3-66
[:SENSe]:CORRection:CSET<n>[:STATe]	3-66
[:SENSe]:CORRection:CSET<n>:X:SPACIng	3-66
:INPut:IMPedance	3-67
[:SENSe]:CORRection:IMPedance[:INPut][[:MAGNitude]	3-67
[:SENSe]:CORRection:SA[:RF]:GAIN	3-68
[:SENSe]:DETector:TRACe<n>:AUTO	3-68
[:SENSe]:EMC:STANdard[:SELeCt]	3-69
[:SENSe]:FREQuency:CENTer	3-69
[:SENSe]:FREQuency:MIDSpan	3-70
[:SENSe]:FREQuency:SPAN.....	3-70
[:SENSe]:FREQuency:STARt	3-71
[:SENSe]:FREQuency:STARt:AUTO	3-71
[:SENSe]:FREQuency:STOP	3-72
[:SENSe]:FREQuency:STOP:AUTO	3-72
[:SENSe]:FSCan:DETector:TRACe<n>	3-73
[:SENSe]:FSCan:FINAl:DETector<n>	3-73
[:SENSe]:FSCan:FINAl:DETector<n>:DWELl	3-74
[:SENSe]:FSCan:FINAl:DETector<n>:LDELta.....	3-75
[:SENSe]:FSCan:MARKer:COUPle:METer	3-75
[:SENSe]:FSCan:SCAN:ABORT	3-76
[:SENSe]:FSCan:SCAN<n>:BANDwidth BWIDth:EMIFilter:STATe.....	3-76
[:SENSe]:FSCan:SCAN<n>:BANDwidth[:RESolution]	3-76
[:SENSe]:FSCan:SCAN<n>:BANDwidth[:RESolution]:AUTO.....	3-77
[:SENSe]:FSCan:SCAN<n>:INPut:ATTenuation.....	3-78
[:SENSe]:FSCan:SCAN<n>:INPut:ATTenuation:AUTO	3-78
[:SENSe]:FSCan:SCAN<n>:POINT	3-79
[:SENSe]:FSCan:SCAN<n>:POWer:GAIN[:STATe]	3-79
[:SENSe]:FSCan:SCAN<n>:STARt	3-80
[:SENSe]:FSCan:SCAN<n>:STATe	3-80
[:SENSe]:FSCan:SCAN<n>:STOP	3-81
[:SENSe]:FSCan:SCAN<n>:TIME.....	3-81
[:SENSe]:FSCan:SCAN<n>:TIME:AUTO	3-82
[:SENSe]:FSCan:SEARch:MODE.....	3-82
[:SENSe]:FSCan:SEARch:PEAK:COUNT	3-83
[:SENSe]:FSCan:SEARch:PEAK:COUNT:STATe	3-83
[:SENSe]:FSCan:SEARch:SUBRange:COUNT	3-84
[:SENSe]:FSCan:SEQuence	3-84
[:SENSe]:FSCan:SEQuence:REMeasure.....	3-85
[:SENSe]:FSCan:SLISt:COUPle:METer	3-85

[:SENSe]:FSCan:TRACe:TYPE	3-86
[:SENSe]:METer:DETEctor:DWELL	3-86
[:SENSe]:METer:PHOLd:ADJutable	3-87
[:SENSe]:METer:PHOLd:RESet	3-87
[:SENSe]:METer:PHOLd:TYPE	3-87
[:SENSe]:METer<n>:DETEctor	3-88
[:SENSe]:POWer[:RF]:ATTenuation	3-88
[:SENSe]:POWer[:RF]:GAIN[:STATe]	3-89
:STATus Commands	3-90
:SYSTem Commands	3-91
:TRACe Commands	3-92
:TRACe[:DATA]	3-92
:TRACe<n>:DISPlay[:STATe]	3-93
:TRACe<n>:UPDate:STATe	3-93
:TRIGger Commands	3-94
:TRIGger[:SEQuence]:ATRigger	3-94
:TRIGger[:SEQuence]:ATRigger:STATe	3-95
:TRIGger[:SEQuence]:EXTErnal<n>:DELay	3-95
:TRIGger[:SEQuence]:EXTErnal<n>:DELay:STATe	3-96
:TRIGger[:SEQuence]:EXTErnal<n>:SLOPe	3-96
:TRIGger[:SEQuence]:HOLDoff	3-97
:TRIGger[:SEQuence]:HOLDoff:STATe	3-97
:TRIGger[:SEQuence]:SOURce	3-98
:TRIGger2:MODE	3-98
:UNIT Command	3-100
:UNIT:POWer	3-100
Chapter 4 Command System for VSA Mode	4-1
:CALCulate Commands	4-2
:CALCulate:DDEMod:MARKer:AOff	4-3
:CALCulate:DDEMod:MARKer:COUPle[:STATe]	4-3
:CALCulate:DDEMod:MARKer:TABLE[:STATe]	4-3
:CALCulate:DDEMod:MARKer<n>:CPSeArch[:STATe]	4-4
:CALCulate:DDEMod:MARKer<n>:FUNctioN	4-4
:CALCulate:DDEMod:MARKer<n>:FUNctioN:BAND:LEFT	4-5
:CALCulate:DDEMod:MARKer<n>:FUNctioN:BAND:RIGHT	4-5
:CALCulate:DDEMod:MARKer<n>:FUNctioN:BAND:SPAN	4-6
:CALCulate:DDEMod:MARKer<n>:MAXimum	4-7
:CALCulate:DDEMod:MARKer<n>:MAXimum:LEFT	4-7
:CALCulate:DDEMod:MARKer<n>:MAXimum:NEXT	4-7
:CALCulate:DDEMod:MARKer<n>:MAXimum:PREVIOUS	4-8
:CALCulate:DDEMod:MARKer<n>:MAXimum:RIGHT	4-8
:CALCulate:DDEMod:MARKer<n>:MINimum	4-9
:CALCulate:DDEMod:MARKer<n>:MODE	4-9
:CALCulate:DDEMod:MARKer<n>:REFeRence	4-10
:CALCulate:DDEMod:MARKer<n>:TRACe	4-10
:CALCulate:DDEMod:MARKer<n>:X	4-11
:CALCulate:DDEMod:MARKer<n>:Y:IMAGinary	4-11
:CALCulate:DDEMod:MARKer<n>:Y[:REAL]	4-12
:CALCulate:MARKer<n>[:SET]:CENTer	4-13
:CALCulate:MARKer<n>[:SET]:DELTA:CENTer	4-13
:CALCulate:MARKer<n>[:SET]:RLEVel	4-13
:CALCulate:MARKer<n>[:SET]:STARt	4-14
:CALCulate:MARKer<n>[:SET]:STEP	4-14
:CALCulate:MARKer<n>[:SET]:STOP	4-15
:CALibration Commands	4-16
:CALibration:[ALL]	4-16
:CALibration:AUTO	4-16

:CONFigure Commands	4-17
:CONFigure:BERate	4-17
:CONFigure:DDEMod	4-17
:DISPlay Commands.....	4-18
:DISPlay:BACKlight	4-19
:DISPlay:DDEMod:TRACe<n>:DDEMod:EYE:COUNT	4-19
:DISPlay:DDEMod:TRACe<n>:DDEMod:SYMBOL:FORMat	4-20
:DISPlay:DDEMod:TRACe<n>:FEED	4-20
:DISPlay:DDEMod:TRACe<n>:FORMat	4-21
:DISPlay:DDEMod:TRACe<n>:X[:SCALE]:COUPle	4-21
:DISPlay:DDEMod:TRACe<n>:X[:SCALE]:RLEVEL	4-22
:DISPlay:DDEMod:TRACe<n>:X[:SCALE]:RPOSITION	4-23
:DISPlay:DDEMod:TRACe<n>:X[:SCALE]:SPAN	4-23
:DISPlay:DDEMod:TRACe<n>:Y[:SCALE]:AUTO:ONCE	4-24
:DISPlay:DDEMod:TRACe<n>:Y[:SCALE]:PDIVision	4-24
:DISPlay:DDEMod:TRACe<n>:Y[:SCALE]:RLEVEL	4-25
:DISPlay:DDEMod:TRACe<n>:Y:UNIT:PREFERENCE.....	4-25
:DISPlay:DDEMod:WINDow:FORMat.....	4-26
:DISPlay:ENABLE.....	4-26
:DISPlay:GRATICule[:STATE]	4-27
:DISPlay:HDMI[:STATE]	4-27
:FETCh Commands.....	4-28
:FETCh:BER?.....	4-28
:FETCh:DDEMod?	4-28
:FORMat Commands	4-29
:FORMat:BORDER	4-29
:FORMat[:TRACe][:DATA]	4-29
IEEE 488.2 Common Commands	4-31
:INITiate Commands	4-32
:INITiate:BER:REStart.....	4-32
:INITiate:CONTinuous	4-32
:INSTrument Commands.....	4-33
:INSTrument:COUPle:FREQuency:CENTer	4-33
:INSTrument:DEFault	4-33
:INSTrument:NSElect	4-34
:INSTrument[:SElect].....	4-34
:MMEMory Commands.....	4-35
:MMEMory:DElete	4-35
:MMEMory:LOAD:FMT	4-35
:MMEMory:LOAD:STATE	4-36
:MMEMory:LOAD:TRACe:DATA	4-36
:MMEMory:MOVE.....	4-37
:MMEMory:STORE:FMT	4-37
:MMEMory:STORE:SCReen	4-37
:MMEMory:STORE:STATE.....	4-38
:MMEMory:STORE:TRACe:DATA.....	4-38
[[:SENSe] Commands	4-40
[:SENSe]:ACQuisition:TIME	4-41
:INPut:IMPedance	4-41
[:SENSe]:CORRection:IMPedance[:INPut][:MAGNitude]	4-41
[:SENSe]:CORRection:SA[:RF]:GAIN	4-42
[:SENSe]:DDEMod:ALPHA	4-42
[:SENSe]:DDEMod:FFT:WINDow[:TYPE]	4-43
[:SENSe]:DDEMod:FILTer:MEASurement	4-43
[:SENSe]:DDEMod:FILTer:MEASurement:USER<n>[:DATA].....	4-44
[:SENSe]:DDEMod:FILTer:REFerence	4-44
[:SENSe]:DDEMod:FILTer:REFerence:USER<n>[:DATA]	4-45
[:SENSe]:DDEMod:FSK:DEViation:REFerence	4-45

[:SENSe]:DDEMod:FSK:DEVIation:REFeRence:AUTO	4-46
[:SENSe]:DDEMod:LOAD:KNOWndata	4-46
[:SENSe]:DDEMod:MODulation	4-47
[:SENSe]:DDEMod:PPSYmbol	4-47
[:SENSe]:DDEMod:RTTTrace:DETEctor	4-48
[:SENSe]:DDEMod:SRATe	4-48
[:SENSe]:DDEMod:STANdard:PRESet	4-49
[:SENSe]:DDEMod:SWEEp:POINts	4-49
[:SENSe]:DDEMod:SYNC:ALENgtH	4-50
[:SENSe]:DDEMod:SYNC:BURSt:RUNIn	4-50
[:SENSe]:DDEMod:SYNC:BURSt:STATe	4-51
[:SENSe]:DDEMod:SYNC:SLENgtH	4-51
[:SENSe]:DDEMod:SYNC:SWORd:OFFSet	4-52
[:SENSe]:DDEMod:SYNC:SWORd:PATTern	4-52
[:SENSe]:DDEMod:SYNC:SWORd:STATe	4-53
[:SENSe]:FREQuency:CENTer	4-53
[:SENSe]:FREQuency:CENTer:STEP:AUTO	4-54
[:SENSe]:FREQuency:CENTer:STEP[:INCRement]	4-54
[:SENSe]:FREQuency:SPAN?	4-55
[:SENSe]:FREQuency:START	4-55
[:SENSe]:FREQuency:STOP	4-56
[:SENSe]:POWer[:RF]:RANGe	4-56
:STATus Commands	4-57
:SYSTem Commands	4-58
:TRACe Command	4-59
:TRACe<n>[:DATA]?	4-59
:TRIGger Commands	4-60
:TRIGger[:SEQuence]:ATRigger	4-60
:TRIGger[:SEQuence]:ATRigger:STATe	4-61
:TRIGger[:SEQuence]:EXTeRnal<n>:DELay	4-61
:TRIGger[:SEQuence]:EXTeRnal<n>:DELay:STATe	4-62
:TRIGger[:SEQuence]:EXTeRnal<n>:SLOPe	4-62
:TRIGger[:SEQuence]:FMT:CRITeria	4-63
:TRIGger[:SEQuence]:FMT:DELay	4-63
:TRIGger[:SEQuence]:FMT:DELay:STATe	4-64
:TRIGger[:SEQuence]:FMT:MASK	4-65
:TRIGger[:SEQuence]:FMT:MASK:EDIT	4-65
:TRIGger[:SEQuence]:FMT:MASK:RELative:AMPLitude	4-66
:TRIGger[:SEQuence]:FMT:MASK:RELative:FREQuency	4-66
:TRIGger[:SEQuence]:FMT:MASK<n>:BUILd	4-67
:TRIGger[:SEQuence]:FMT:MASK<n>:DATA	4-67
:TRIGger[:SEQuence]:FMT:MASK<n>:DELeTe	4-68
:TRIGger[:SEQuence]:FMT:MASK<n>:NAME	4-68
:TRIGger[:SEQuence]:FMT:MASK<n>:NEW	4-69
:TRIGger[:SEQuence]:HOLDoff	4-69
:TRIGger[:SEQuence]:HOLDoff:STATe	4-70
:TRIGger[:SEQuence]:LEVel	4-70
:TRIGger[:SEQuence]:SOURce	4-71
:TRIGger2:MODE	4-71
Chapter 5 Programming Examples	5-1
Programming Instructions	5-2
Programming Preparations	5-2
Visual C++ 6.0 Programming Example	5-3
Visual Basic 6.0 Programming Example	5-11
LabVIEW 2010 Programming Example	5-15
Linux Programming Example	5-19
Programming Preparations	5-19

Linux Programming Procedures	5-22
Chapter 6 Appendix.....	6-1
Appendix A: Default Settings.....	6-1
Appendix B: Warranty.....	6-11

Chapter 1 Programming Overview

This chapter introduces how to set up remote communication between the spectrum analyzer and the PC, the remote control methods, the syntax, symbols, parameters, and abbreviation rules of the SCPI commands.

Contents in this chapter:

- ◆ [Build Remote Communication](#)
- ◆ [Remote Control Method](#)
- ◆ [SCPI Command Overview](#)

Build Remote Communication

RSA3000E supports communication with PC via USB and LAN interface for remote control. This chapter introduces in details how to use Ultra Sigma to send commands through the USB interface to control the analyzer.

Operation Procedures:

1. Install Ultra Sigma (PC) software.

You can download Ultra Sigma from the official website of **RIGOL** (www.rigol.com) and install the software according to the installation wizard.

2. Connect the analyzer to the PC and configure the interface parameters for the instrument

RSA3000E supports three communication interfaces: USB and LAN.

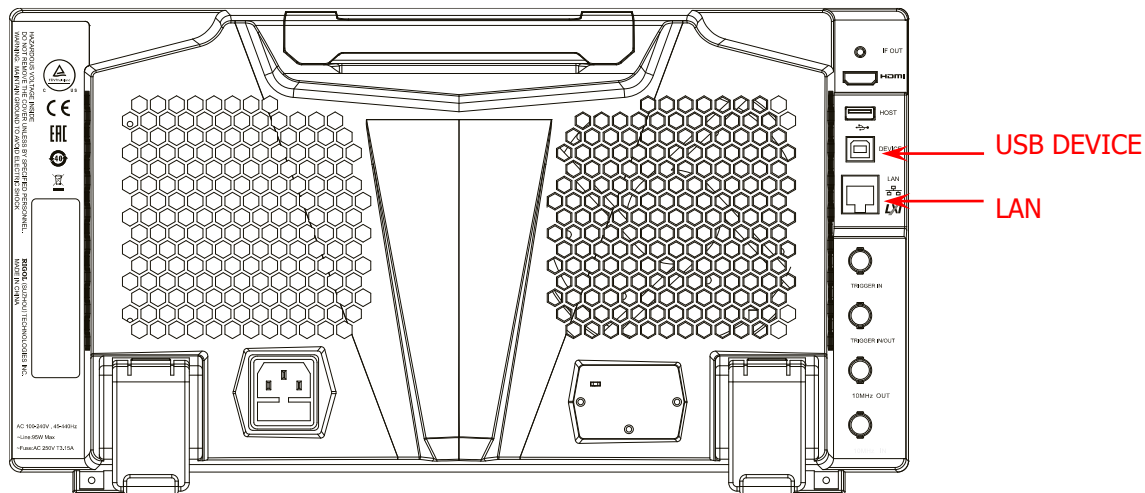


Figure 1-1 RSA3000E Communication Interface

(1) Remote communication via USB:


Use the USB cable to connect the USB DEVICE interface on the rear panel of RSA3000E to the USB HOST interface of the PC.

(2) Remote communication via LAN:

- Make sure that your PC has been accessed to the local area network.
- Check whether the local area network where your PC resides supports DHCP or auto IP mode. If not, you need to obtain the available network interface parameters, including the IP address, subnet mask, default gateway, and DNS.
- Connect RSA3000E to the local area network by using a network cable.
- Press **System** → **Interface** → **LAN** to configure the IP address, subnet mask, default gateway, and DNS for the instrument.

3. Check whether the connection is successful.

Run Ultra Sigma, and then search for the resources and right-click the resource name. Select "SCPI Panel Control" to open the SCPI command control panel. In the SCPI command control panel, input a correct command. After that, click **Send Command** first and then click **Read Response**. Or you can also directly click **Send & Read** to verify whether the connection works properly. The following figure takes USB interface as an example to illustrate it.

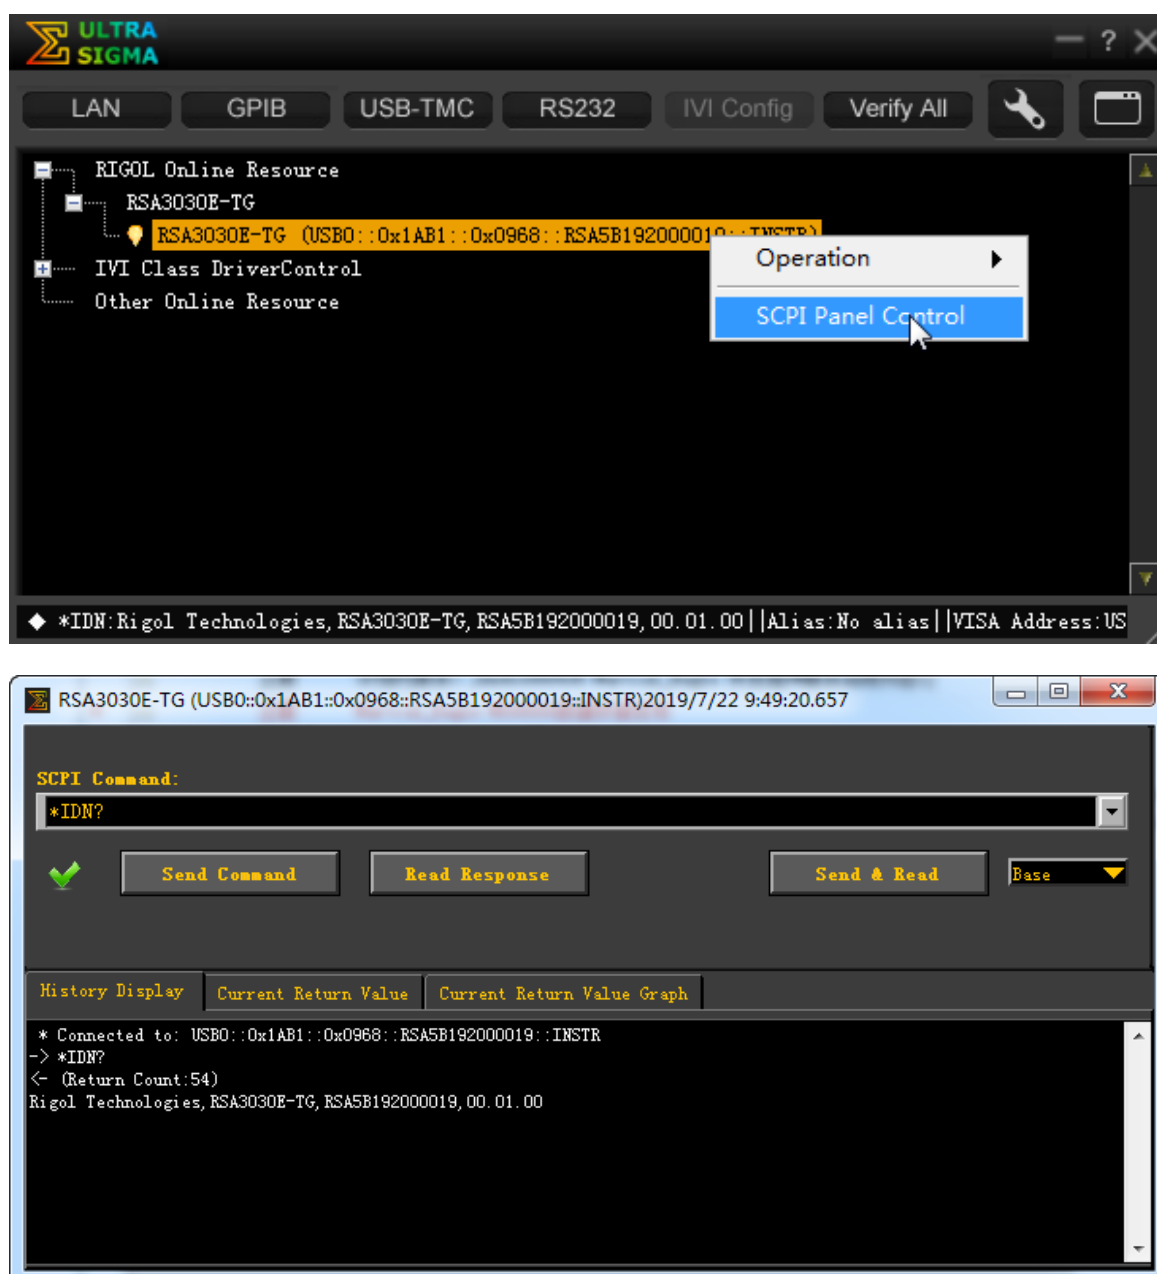

Remote Control Method

1. User-defined programming

You can refer to the SCPI (Standard Commands for Programmable Instruments) commands listed in Chapter 2 in this manual to control RSA3000E by programming in LabVIEW, Visual C++, and other development environments. For details, refer to descriptions in Chapter 4 in this manual.

2. Send SCPI commands via the PC software

You can use the PC software to send commands to control RSA3000E remotely. **RIGOL** Ultra Sigma is recommended. You can download the software from **RIGOL** official website (www.rigol.com).

SCPI Command Overview

SCPI (Standard Commands for Programmable Instruments) is a standardized instrument programming language that is built upon the existing standard IEEE 488.1 and IEEE 488.2 and conforms to various standards, such as the floating point operation rule in IEEE 754 standard, ISO 646 7-bit coded character set for information interchange (equivalent to ASCII programming). This chapter introduces the syntax, symbols, parameters, and abbreviation rules of the SCPI commands.

Syntax

The SCPI commands provide a hierarchical tree structure, and consist of multiple subsystems. Each command subsystem consists of one root keyword and one or more sub-keywords. The command line usually starts with ":"; the keywords are separated by ":" and are followed by the parameter settings available; "?" is added at the end of the command line to indicate a query; the commands and parameters are separated by spaces.

For example,

```
:CALCulate:BANDwidth:NDB <rel_ampl>
:CALCulate:BANDwidth:NDB?
```

CALCulate is the root keyword of the command. BANDwidth is the second-level keyword, and NDB is the third-level keyword. The command line starts with ":", and a colon is also used to separate the multiple-level keywords. <rel_ampl> represents the parameters available for setting. "?" represents query. The command :CALCulate:BANDwidth:NDB and the parameter <rel_ampl> are separated by a space.

In some commands with multiple parameters, "," is often used to separate these parameters. For example,

```
:SYSTem:DATE <year>,<month>,<day>.
```

Symbol Description

The following four symbols are not part of the SCPI command, and they are not sent with the commands, but taken as delimiters to better describe the parameters in the command.

1. Braces { }

The parameters enclosed in the braces are optional. You do not have to set it, also you can set for one or more times.

2. Vertical Bar |

The vertical bar is used to separate multiple parameters. When using the command, you must select one of the parameters. For example, in the command :CALCulate:MARKer<n>:LINEs[:STATe] OFF|ON|0|1, you can select any of the four available parameters: OFF, ON, 0, or 1.

3. Square Brackets []

The content (command keyword) in the square brackets can be omitted. If a keyword is omitted, it will be set to the default. For example, for the [:SENSe]:POWer[:RF]:ATTenuation? command, sending any of the four commands below can generate the same effect:

```
:POWer:ATTenuation?
:POWer:RF:ATTenuation?
:SENSe:POWer:ATTenuation?
:SENSe:POWer:RF:ATTenuation?
```

4. Angle Brackets < >

The parameter enclosed in the angle brackets must be replaced by an effective value. For example, send the :SENSe:FREQuency:CENTer 1000 command in [:SENSe]:FREQuency:CENTer <freq>format.

Parameter Type

The command parameters introduced in this manual include 6 types: Bool, Keyword, Integer, Consecutive Real Number, Discrete, and ASCII String.

1. Bool

The parameter can be set to OFF (0) or ON (1).

2. Keyword

The parameter can be any of the values listed.

3. Integer

Unless otherwise specified, the parameter can be any integer within the effective value range. Note: Do not set the parameter to a decimal, otherwise, errors will occur.

4. Consecutive Real Number

Unless otherwise specified, the parameter could be any value within the effective value range according to the accuracy requirement (by default, there are 9 digits after the decimal point).

5. Discrete

The parameter could only be one of the specified values and these values are discontinuous.

6. ASCII String

The parameter can be the combinations of ASCII characters.

Command Abbreviation

All the commands are case-insensitive. They can all be written in upper case or in lower case. For abbreviations, you only need to input all the upper-case letters in the command. For example, :CALCulate:BANDwidth:NDB? can be abbreviated as :CALC:BAND:NDB? or :calc:band:ndb?

Chapter 2 Command Systems for GPSA and RTSA Modes

This chapter introduces the commands of the RSA3000E series spectrum analyzer.

Contents in this chapter:

- ◆ [:CALCulate Commands](#)
- ◆ [:CALibration Commands](#)
- ◆ [:CONFigure Commands](#)
- ◆ [:COUPle Command](#)
- ◆ [:DISPlay Commands](#)
- ◆ [:FETCh Commands](#)
- ◆ [:FORMat Commands](#)
- ◆ [IEEE 488.2 Common Commands](#)
- ◆ [:INITiate Commands](#)
- ◆ [:INSTrument Commands](#)
- ◆ [:MMEMory Commands](#)
- ◆ [:OUTPut Command](#)
- ◆ [:READ Commands](#)
- ◆ [\[:SENSe\] Commands](#)
- ◆ [:SOURce Commands](#)
- ◆ [:STATus Commands](#)
- ◆ [:SYSTem Commands](#)
- ◆ [:TRACe Commands](#)
- ◆ [:TRACe Commands](#)
- ◆ [:TRIGger Commands](#)
- ◆ [:UNIT Command](#)

Remarks:

1. The commands concerning the advanced measurement are only available for the RSA3000E model installed with relevant options. For details, refer to remarks for each command subsystem.
2. The commands related to the tracking generator are only available for RSA3030E-TG/RSA3015E-TG. They are only available for GPSA mode.
3. For the command set, unless otherwise specified, the query command returns "N/A" (without quotations in its return format) if no specified option is installed. If the queried function is disabled or improper type match is found, the query command will return "Error" (without quotations in its return format).
4. This manual takes RSA3030E as an example to illustrate the range of the parameters in each command.

:CALCulate Commands

Command List:

- ◆ [:CALCulate:BANDwidth|BWIDth:NDB](#)
- ◆ [:CALCulate:BANDwidth|BWIDth:RESult?](#)
- ◆ [:CALCulate:BANDwidth|BWIDth:RLEFt?](#)
- ◆ [:CALCulate:BANDwidth|BWIDth:RRIGHt?](#)
- ◆ [:CALCulate:BANDwidth|BWIDth \[:STATe\]](#)
- ◆ [:CALCulate:LLINe:ALL:DELeTe](#)
- ◆ [:CALCulate:LLINe:TEST](#)
- ◆ [:CALCulate:LLINe<n>:AMPLitude:CMODE:RELative](#)
- ◆ [:CALCulate:LLINe<n>:BUILd](#)
- ◆ [:CALCulate:LLINe<n>:COPY](#)
- ◆ [:CALCulate:LLINe<n>:DATA](#)
- ◆ [:CALCulate:LLINe<n>:DELeTe](#)
- ◆ [:CALCulate:LLINe<n>:DISPlay](#)
- ◆ [:CALCulate:LLINe<n>:FAIL?](#)
- ◆ [:CALCulate:LLINe<n>:FREQuency:CMODE:RELative](#)
- ◆ [:CALCulate:LLINe<n>:MARGIn](#)
- ◆ [:CALCulate:LLINe<n>:MARGIn:STATe](#)
- ◆ [:CALCulate:LLINe<n>:TRACe](#)
- ◆ [:CALCulate:LLINe<n>:TYPE](#)
- ◆ [:CALCulate:MARKer:AOff](#)
- ◆ [:CALCulate:MARKer:COUPle\[:STATe\]](#)
- ◆ [:CALCulate:MARKer:PEAK:EXCursion](#)
- ◆ [:CALCulate:MARKer:PEAK:EXCursion:STATe](#)
- ◆ [:CALCulate:MARKer:PEAK:SEARch:MODE](#)
- ◆ [:CALCulate:MARKer:PEAK:SORT](#)
- ◆ [:TRACe:MATH:PEAK:SORT](#)
- ◆ [:CALCulate:MARKer:PEAK:TABLE:READout](#)
- ◆ [:CALCulate:MARKer:PEAK:TABLE\[:STATe\]](#)
- ◆ [:CALCulate:MARKer:PEAK:THReshold](#)
- ◆ [:CALCulate:MARKer:PEAK:THReshold:STATe](#)
- ◆ [:CALCulate:MARKer:TABLE\[:STATe\]](#)
- ◆ [:CALCulate:MARKer:TRCKing\[:STATe\]](#)
- ◆ [:CALCulate:MARKer<n>:CPSearch\[:STATe\]](#)
- ◆ [:CALCulate:MARKer<n>:FCOunt:GATetime](#)
- ◆ [:CALCulate:MARKer<n>:FCOunt:GATetime:AUTO](#)
- ◆ [:CALCulate:MARKer<n>:FCOunt\[:STATe\]](#)

- ◆ [:CALCulate:MARKer<n>:FCOunt:X?](#)
- ◆ [:CALCulate:MARKer<n>:FUNction](#)
- ◆ [:CALCulate:MARKer<n>:FUNction:BAND:LEFT](#)
- ◆ [:CALCulate:MARKer<n>:FUNction:BAND:RIGHT](#)
- ◆ [:CALCulate:MARKer<n>:FUNction:BAND:SPAN](#)
- ◆ [:CALCulate:MARKer<n>:FUNction:BAND:SPAN:AUTO](#)
- ◆ [:CALCulate:MARKer<n>:LINEs\[:STATe\]](#)
- ◆ [:CALCulate:MARKer<n>:MAXimum:LEFT](#)
- ◆ [:CALCulate:MARKer<n>:MAXimum\[:MAX\]](#)
- ◆ [:CALCulate:MARKer<n>:MAXimum:NEXT](#)
- ◆ [:CALCulate:MARKer<n>:MAXimum:RIGHT](#)
- ◆ [:CALCulate:MARKer<n>:MINimum](#)
- ◆ [:CALCulate:MARKer<n>:MODE](#)
- ◆ [:CALCulate:MARKer<n>:PTPeak](#)
- ◆ [:CALCulate:MARKer<n>:REFerence](#)
- ◆ [:CALCulate:MARKer<n>\[:SET\]:CENTer](#)
- ◆ [:CALCulate:MARKer<n>\[:SET\]:DELTA:CENTer](#)
- ◆ [:CALCulate:MARKer<n>\[:SET\]:DELTA:SPAN](#)
- ◆ [:CALCulate:MARKer<n>\[:SET\]:RLEVel](#)
- ◆ [:CALCulate:MARKer<n>\[:SET\]:START](#)
- ◆ [:CALCulate:MARKer<n>\[:SET\]:STEP](#)
- ◆ [:CALCulate:MARKer<n>\[:SET\]:STOP](#)
- ◆ [:CALCulate:MARKer<n>:STATe](#)
- ◆ [:CALCulate:MARKer<n>:TRACe](#)
- ◆ [:CALCulate:MARKer<n>:TRACe:AUTO](#)
- ◆ [:CALCulate:MARKer<n>:X](#)
- ◆ [:CALCulate:MARKer<n>:X:READout](#)
- ◆ [:CALCulate:MARKer<n>:X:READout:AUTO](#)
- ◆ [:CALCulate:MARKer<n>:Y](#)
- ◆ [:CALCulate:MARKer<n>:Z:POSition](#)
- ◆ [:CALCulate:MATH](#)
- ◆ [:CALCulate:NTData\[:STATe\]](#)

:CALCulate:BANDwidth | BWIDth:NDB**Syntax**

:CALCulate:BANDwidth|BWIDth:NDB <rel_ampl>
:CALCulate:BANDwidth|BWIDth:NDB?

Description

Sets the N value in N dB BW measurement.
Queries the N value in N dB BW measurement.

Parameter

Name	Type	Range	Default
<rel_ampl>	Consecutive Real Number	-140 dB to -0.01 dB	-3.01 dB

Remarks

This command is invalid for the PVT measurement mode in RTSA.

Return Format

The query returns the N value in scientific notation.

Example

The following command sets N to -4.
:CALCulate:BANDwidth:NDB -4
:CALCulate:BWIDth:NDB -4

The following query returns -4.000000e+00.
:CALCulate:BANDwidth:NDB?
:CALCulate:BWIDth:NDB?

:CALCulate:BANDwidth | BWIDth:RESult?**Syntax**

:CALCulate:BANDwidth|BWIDth:RESult?

Description

Queries the measurement results of the N dB band, and its unit is Hz.

Remarks

This command is invalid for the PVT measurement mode in RTSA.

Return Format

The query returns the bandwidth value in scientific notation (with Hz as the unit).
If the two points which are located at both sides of the current marker with N dB fall or rise in its peak amplitude are not found, the query returns -1.000000000e+02.

:CALCulate:BANDwidth | BWIDth:RLEFt?**Syntax**

:CALCulate:BANDwidth|BWIDth:RLEFt?

Description

Queries the frequency value of the frequency point that is located at the left side of the current marker with N dB fall or rise in its peak amplitude.

Remarks

This command is invalid for the PvT measurement mode in RTSA.

Return Format

The query returns the frequency value in scientific notation (with Hz as the unit).

If the frequency point that is located at the left side of the current marker with N dB fall or rise in its peak amplitude is not found, the query returns -1.000000000e+02.

:CALCulate:BANDwidth | BWIDth:RRIGht?**Syntax**

:CALCulate:BANDwidth|BWIDth:RRIGht?

Description

Queries the frequency value of the frequency point that is located at the right side of the current marker with N dB fall or rise in its peak amplitude.

Remarks

This command is invalid for the PvT measurement mode in RTSA.

Return Format

The query returns the frequency value in scientific notation (with Hz as the unit).

If the frequency point that is located at the right side of the current marker with N dB fall or rise in its peak amplitude is not found, the query returns -1.000000000e+02.

:CALCulate:BANDwidth | BWIDth [:STATe]**Syntax**

:CALCulate:BANDwidth|BWIDth[:STATe] OFF|ON|0|1

:CALCulate:BANDwidth|BWIDth[:STATe]?

Description

Enables or disables the N dB bandwidth measurement function.

Queries the status of the N dB bandwidth measurement function.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

This command is invalid for the PvT measurement mode in RTSA.

Return Format

The query returns 0 or 1.

Example

The following command enables the N dB BW measurement function.

:CALCulate:BANDwidth:STATe ON or :CALCulate:BANDwidth:STATe 1

:CALCulate:BWIDth:STATe ON or :CALCulate:BWIDth:STATe 1

The following query returns 1.

:CALCulate:BANDwidth:STATe?

:CALCulate:BWIDth:STATe?

:CALCulate:LLINe:ALL:DELeTe**Syntax**

:CALCulate:LLINe:ALL:DELeTe

Description

Deletes all the limit line data.

:CALCulate:LLINe:TEST**Syntax**

:CALCulate:LLINe:TEST OFF|ON|0|1

:CALCulate:LLINe:TEST?

Description

Enables or disables the limit line test function.

Queries the status of the limit line test function.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command disables the limit line test function.

:CALCulate:LLINe:TEST OFF or :CALCulate:LLINe:TEST 0

The following query returns 0.

:CALCulate:LLINe:TEST?

:CALCulate:LLINe<n>:AMPLitude:CMODE:RELative

Syntax

```
:CALCulate:LLINe<n>:AMPLitude:CMODE:RELative OFF|ON|0|1
```

```
:CALCulate:LLINe<n>:AMPLitude:CMODE:RELative?
```

Description

Enables or disables the coupling functions between the selected limit line data points and the reference level.

Queries the status of the coupling functions between the selected limit line data points and the reference level.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	---
---	Bool	OFF ON 0 1	OFF 0

Remarks

OFF|0: disables the coupling function. That is, "Fixed" is selected under **Y to Ref**, and the amplitude of the current limit line editing point is not affected by the reference level.

ON|1: enables the coupling function. That is, "Relative" is selected under **Y to Ref**, and the amplitude of the current limit line editing point is the difference between the current point with the current reference level. At this time, if the reference level changes, the position of the current editing point will move up and down with it.

Return Format

The query returns 0 or 1.

Example

The following command disables the coupling functions between the selected limit line data points and the reference level.

```
:CALCulate:LLINe2:AMPLitude:CMODE:RELative OFF or :CALCulate:LLINe2:AMPLitude:CMODE:RELative 0
```

The following query returns 0.

```
:CALCulate:LLINe2:AMPLitude:CMODE:RELative?
```

:CALCulate:LLINe<n>:BUILd

Syntax

```
:CALCulate:LLINe<n>:BUILd TRACE1|TRACE2|TRACE3|TRACE4|TRACE5|TRACE6
```

Description

Builds the limit line from the selected trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	---
---	Keyword	TRACE1 TRACE2 TRACE3 TRACE4 TRACE5 TRACE6	---

Example

The following command builds Limit Line 2 from Trace2.

```
:CALCulate:LLINe2:BUILd TRACE2
```

:CALCulate:LLINE<n>:COPY

Syntax

:CALCulate:LLINE<n>:COPY LLINE1|LLINE2|LLINE3|LLINE4|LLINE5|LLINE6

Description

Copies the selected limit line to the current limit line.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	—
—	Keyword	LLINE1 LLINE2 LLINE3 LLINE4 LLINE5 LLINE6	—

Remarks

If the limit line to be copied that you select is the same as the current limit line, no operation should be performed.

Example

The following command copies Limit Line 1 to Limit Line 2.

```
:CALCulate:LLINE2:COPY LLINE1
```

:CALCulate:LLINE<n>:DATA

Syntax

:CALCulate:LLINE<n>:DATA <x>,<ampl>,<connect>{,<x>,<ampl>,<connect>}

:CALCulate:LLINE<n>:DATA?

Description

Edits one limit line, and marks it with n.

Queries the limit line data that you are editing currently.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	1
<x>	Consecutive Real Number	0 Hz to 3 GHz	—
<ampl>	Consecutive Real Number	-1,000 dBm to 1,000 dBm	—
<connect>	Discrete	0 1	0

Remarks

<x>: indicates frequency.

<apml>: indicates the amplitude. By default, its unit is dBm. The same X value can be configured with at most two amplitude values.

<connect>: can be configured with 0 or 1. When it is configured with 1, it indicates that the current point connects with the previous point to determine the limit line; when configured with 0, it indicates that the current point is disconnected from the previous point. The <connect> value of the first point can be configured with 0.

Return Format

Queries the returned limit line data that you are editing currently.

Example

The following command edits a limit line that contains three points, and marks it Limit Line 2.

```
:CALCulate:LLINE2:DATA 50,100,0,100,150,1,200,200,1
```

The following query returns 50,100,0,100,150,1,200,200,1.
:CALCulate:LLINe2:DATA?

:CALCulate:LLINe<n>:DELeTe

Syntax

:CALCulate:LLINe<n>:DELeTe

Description

Deletes the selected limit line.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	—

Example

The following command deletes Limit Line 2.
:CALCulate:LLINe2:DELeTe

:CALCulate:LLINe<n>:DISPlay

Syntax

:CALCulate:LLINe<n>:DISPlay OFF|ON|0|1
:CALCulate:LLINe<n>:DISPlay?

Description

Turns on or off the selected limit line.
Queries the status of the selected limit line.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	1
—	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command turns on Limit Line 2.
:CALCulate:LLINe2:DISPlay ON or :CALCulate:LLINe2:DISPlay 1

The following query returns 1.
:CALCulate:LLINe2:DISPlay?

:CALCulate:LLINe<n>:FAIL?

Syntax

:CALCulate:LLINe<n>:FAIL?

Description

Queries the measurement results of the selected limit line and its associated trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	—

Remarks

If you enable the test for the displayed trace and its corresponding limit line, and each displayed trace has its corresponding limit line enabled, then you can run the command to query whether the trace test passes.

Return Format

The query returns 0 (pass) or 1 (fail).

:CALCulate:LLINe<n>:FREQuency:CMODE:RELative

Syntax

:CALCulate:LLINe<n>:FREQuency:CMODE:RELative OFF|ON|0|1

:CALCulate:LLINe<n>:FREQuency:CMODE:RELative?

Description

Enables or disables the coupling functions between the selected limit line data points and the center frequency.

Queries the status of the coupling functions between the selected limit line data points and the center frequency.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	—
—	Bool	OFF ON 0 1	OFF 0

Remarks

OFF|0: disables the coupling function. That is, "Fixed" is selected under **X to CF**, and the frequency of the current limit line editing point is not affected by the center frequency.

ON|1: enables the coupling function. That is, "Relative" is selected under **X to CF**, and the amplitude of the current limit line editing point is the difference between the current point with the current center frequency. At this time, if the center frequency changes, the position of the current editing point will move left and right with it.

Return Format

The query returns 0 or 1.

Example

The following command disables the coupling functions between data points of Limit Line 2 and the center frequency.

:CALCulate:LLINe2:FREQuency:CMODE:RELative OFF or :CALCulate:LLINe2:FREQuency:CMODE:RELative 0

The following query returns 0.

:CALCulate:LLINe2:FREQuency:CMODE:RELative?

:CALCulate:LLINe<n>:MARGin

Syntax

```
:CALCulate:LLINe<n>:MARGin <rel_ampl>
:CALCulate:LLINe<n>:MARGin?
```

Description

Sets the margin for the selected limit line.
Queries the margin for the selected limit line.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	—
<rel_ampl>	Consecutive Real Number	-40 dB to 0 dB	0 dB

Return Format

The query returns the margin for the limit line in scientific notation.

Example

The following command sets the margin for Limit Line 2 to 1 dB.
:CALCulate:LLINe2:MARGin 1 dB

The following query returns 1.000000e+00.
:CALCulate:LLINe2:MARGin?

:CALCulate:LLINe<n>:MARGin:STATe

Syntax

```
:CALCulate:LLINe<n>:MARGin:STATe OFF|ON|0|1
:CALCulate:LLINe<n>:MARGin:STATe?
```

Description

Enables or disables the margin for the selected limit line.
Queries the status of the margin for the selected limit line.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	—
—	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command turns on the margin for Limit Line 2.
:CALCulate:LLINe2:MARGin:STATe ON or :CALCulate:LLINe2:MARGin:STATe 1

The following query returns 1.
:CALCulate:LLINe2:MARGin:STATe?

:CALCulate:LLINe<n>:TRACe

Syntax

:CALCulate:LLINe<n>:TRACe 1|2|3|4|5|6
:CALCulate:LLINe<n>:TRACe?

Description

Sets the trace to be tested against the current limit line.
Queries the trace to be tested against the current limit line.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	—
—	Discrete	1 2 3 4 5 6	Refer to "Remarks"

Remarks

Limit Line 1 and 2: The default is Trace 1.
Limit Line 3 and 4: The default is Trace 2.
Limit Line 5 and 6: The default is Trace 3.

Return Format

The query returns 1, 2, 3, 4, 5, or 6.

Example

The following command sets that Trace 2 is tested against Limit Line 3.
:CALCulate:LLINe3:TRACe 2

The following query returns 2.
:CALCulate:LLINe3:TRACe?

:CALCulate:LLINe<n>:TYPE

Syntax

:CALCulate:LLINe<n>:TYPE UPPer|LOWer
:CALCulate:LLINe<n>:TYPE?

Description

Sets the type of the specified limit line.
Queries the type of the specified limit line.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	—
—	Keyword	UPPer LOWer	Refer to "Remarks"

Remarks

Limit Line 1, Limit Line 3, and Limit Line 5 belong to the upper type; Limit Line 2, Limit Line 4, and Limit Line 6 belong to the lower type.

Return Format

The query returns UPP or LOW.

Example

The following command sets Limit Line 2 to the upper type.

```
:CALCulate:LLINe2:TYPE UPPer
```

The following query returns UPP.

```
:CALCulate:LLINe2:TYPE?
```

:CALCulate:MARKer:AOff

Syntax

```
:CALCulate:MARKer:AOff
```

Description

Turns off all the enabled markers.

:CALCulate:MARKer:COUPle[:STATe]

Syntax

```
:CALCulate:MARKer:COUPle[:STATe] OFF|ON|0|1
```

```
:CALCulate:MARKer:COUPle[:STATe]?
```

Description

Enables or disables the couple marker function.

Queries the state of the couple marker function.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

When you enable the couple marker function, moving any marker will make other markers (that are not fixed or off) move along with it.

Return Format

The query returns 0 or 1.

Example

The following command disables the couple marker function.

```
:CALCulate:MARKer:COUPle:STATe OFF or :CALCulate:MARKer:COUPle:STATe 0
```

The following query returns 0.

```
:CALCulate:MARKer:COUPle:STATe?
```

:CALCulate:MARKer:PEAK:EXCursion

Syntax

```
:CALCulate:MARKer:PEAK:EXCursion <rel_ampl>
```

```
:CALCulate:MARKer:PEAK:EXCursion?
```

Description

Sets the peak offset. Its unit is dB.

Queries the peak offset.

Parameter

Name	Type	Range	Default
<rel_ampl>	Consecutive Real Number	0 dB to 100 dB	6 dB

Return Format

The query returns the peak offset in scientific notation.

Example

The following command sets the peak offset to 12 dB.

```
:CALCulate:MARKer:PEAK:EXCursion 12
```

The following query returns 1.200000e+01.

```
:CALCulate:MARKer:PEAK:EXCursion?
```

:CALCulate:MARKer:PEAK:EXCursion:STATe**Syntax**

```
:CALCulate:MARKer:PEAK:EXCursion:STATe OFF|ON|0|1
```

```
:CALCulate:MARKer:PEAK:EXCursion:STATe?
```

Description

Enables or disables the peak offset function.

Queries the status of the peak offset function.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command enables the peak offset function.

```
:CALCulate:MARKer:PEAK:EXCursion:STATe ON or :CALCulate:MARKer:PEAK:EXCursion:STATe 1
```

The following query returns 1.

```
:CALCulate:MARKer:PEAK:EXCursion:STATe?
```

:CALCulate:MARKer:PEAK:SEARch:MODE**Syntax**

```
:CALCulate:MARKer:PEAK:SEARch:MODE PARameter|MAXimum
```

```
:CALCulate:MARKer:PEAK:SEARch:MODE?
```

Description

Sets the peak search mode.

Queries the peak search mode.

Parameter

Name	Type	Range	Default
—	Keyword	PARameter MAXimum	MAXimum

Remarks

- PARAmeter: indicates parameter. If "parameter" is selected under search mode, the system will search for the peak of the specified parameter on the trace.
- MAXimum: indicates maximum. If "maximum" is selected under search mode, the system will search for the maximum value on the trace.

The command is only valid for the peak search executed by sending the `:CALCulate:MARKer<n>:MAXimum` command. Other items under the peak search menu such as Next Peak, Next Peak Right, Next Peak Left, and Minimum Peak are all searched based on "parameter".

Return Format

The query returns PAR or MAX.

Example

The following command sets the peak search mode to "parameter".

```
:CALCulate:MARKer:PEAK:SEARch:MODE PARAmeter
```

The following query returns PAR.

```
:CALCulate:MARKer:PEAK:SEARch:MODE?
```

:CALCulate:MARKer:PEAK:SORT :TRACe:MATH:PEAK:SORT

Syntax

```
:CALCulate:MARKer:PEAK:SORT FREQuency|AMPLitude
```

```
:CALCulate:MARKer:PEAK:SORT?
```

```
:TRACe:MATH:PEAK:SORT FREQuency| AMPLitude
```

```
:TRACe:MATH:PEAK:SORT?
```

Description

Sets the sorting order of the data displayed in the peak table.

Queries the sorting order of the data displayed in the peak table.

Parameter

Name	Type	Range	Default
—	Keyword	FREQuency AMPLitude	AMPLitude

Remarks

FREQuency: lists the peaks in order of ascending frequency.

AMPLitude: lists the peaks in order of descending amplitude.

Return Format

The query returns FREQ or AMPL.

Example

The following command sets the data in the peak table to be sorted in descending amplitude.

```
:CALCulate:MARKer:PEAK:SORT AMPLitude
```

```
:TRACe:MATH:PEAK:SORT AMPLitude
```

The following query returns AMPL.

```
:CALCulate:MARKer:PEAK:SORT?
```

```
:TRACe:MATH:PEAK:SORT?
```

:CALCulate:MARKer:PEAK:TABLE:READout :TRACe:MATH:PEAK:THReshold

Syntax

```
:CALCulate:MARKer:PEAK:TABLE:READout ALL|GTDLine|LTDLine
:CALCulate:MARKer:PEAK:TABLE:READout?
:TRACe:MATH:PEAK:THReshold NORMal|DLMore|DLLess
:TRACe:MATH:PEAK:THReshold?
```

Description

Sets the peak criteria that the displayed peak must meet.
Queries the peak criteria that the displayed peak must meet.

Parameter

Name	Type	Range	Default
—	Keyword	ALL GTDLine LTDLine NORMal DLMore DLLess	ALL

Remarks

ALL|NORMal: lists all the peaks defined by the peak criteria, and displays data based on the current sorting order in the peak table.
GTDLine|DLMore: lists the peaks that are greater than the defined display line and that meet the peak criteria.
LTDLine|DLLess: lists the peaks that are smaller than the defined display line and that meet the peak criteria.

Return Format

The query returns ALL (NORM), GTDL (DLM), or LTDL (DLL).

Example

The following command lists all the peaks that are greater than the defined display line and that meet the peak criteria.

```
:CALCulate:MARKer:PEAK:TABLE:READout GTDLine
:TRACe:MATH:PEAK:THReshold DLMore
```

The following query returns GTDL.

```
:CALCulate:MARKer:PEAK:TABLE:READout?
```

The following query returns DLM.

```
:TRACe:MATH:PEAK:THReshold?
```

:CALCulate:MARKer:PEAK:TABLE[:STATe] :TRACe:MATH:PEAK:TABLE:STATe

Syntax

```
:CALCulate:MARKer:PEAK:TABLE[:STATe] OFF|ON|0|1
:CALCulate:MARKer:PEAK:TABLE[:STATe]?
:TRACe:MATH:PEAK:TABLE:STATe OFF|ON|0|1
:TRACe:MATH:PEAK:TABLE:STATe?
```

Description

Enables or disables the peak table.
Queries the status of the peak table.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command enables the peak table.

```
:CALCulate:MARKer:PEAK:TABLE:STATe ON or :CALCulate:MARKer:PEAK:TABLE:STATe 1
```

```
:TRACe:MATH:PEAK:TABLE:STATe ON or :TRACe:MATH:PEAK:TABLE:STATe 1
```

The following query returns 1.

```
:CALCulate:MARKer:PEAK:TABLE:STATe?
```

```
:TRACe:MATH:PEAK:TABLE:STATe?
```

:CALCulate:MARKer:PEAK:THReshold**Syntax**

```
:CALCulate:MARKer:PEAK:THReshold <ampl>
```

```
:CALCulate:MARKer:PEAK:THReshold?
```

Description

Sets the peak threshold, and its default unit is dBm.

Queries the peak threshold.

Parameter

Name	Type	Range	Default
<ampl>	Consecutive Real Number	-200 dBm to 0 dBm	-90 dBm

Return Format

The query returns the peak threshold in scientific notation.

Example

The following command sets the peak threshold to -100 dB.

```
:CALCulate:MARKer:PEAK:THReshold -100
```

The following query returns -1.000000e+02.

```
:CALCulate:MARKer:PEAK:THReshold?
```

:CALCulate:MARKer:PEAK:THReshold:STATe**Syntax**

```
:CALCulate:MARKer:PEAK:THReshold:STATe OFF|ON|0|1
```

```
:CALCulate:MARKer:PEAK:THReshold:STATe?
```

Description

Enables or disables the peak threshold function.

Queries the status of the peak threshold function.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command enables the peak threshold function.

:CALCulate:MARKer:PEAK:THReshold:STATe ON or :CALCulate:MARKer:PEAK:THReshold:STATe 1

The following query returns 1.

:CALCulate:MARKer:PEAK:THReshold:STATe?

:CALCulate:MARKer:TABLE[:STATe]**Syntax**

:CALCulate:MARKer:TABLE[:STATe] OFF|ON|0|1

:CALCulate:MARKer:TABLE[:STATe]?

Description

Enables or disables the marker table.

Queries the status of the marker table.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command disables the marker table.

:CALCulate:MARKer:TABLE:STATe OFF or :CALCulate:MARKer:TABLE:STATe 0

The following query returns 0.

:CALCulate:MARKer:TABLE:STATe?

:CALCulate:MARKer:TRCKing[:STATe]**Syntax**

:CALCulate:MARKer:TRCKing[:STATe] OFF|ON|0|1

:CALCulate:MARKer:TRCKing[:STATe]?

Description

Enables or disables the signal track.

Queries the status of the signal track.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

When the signal track is enabled, the instrument will execute a peak search after each sweep, and set the frequency value at the current peak to the center frequency to keep the signal always displayed at the center of the screen.

This command is only available for GPSA mode.

Return Format

The query returns 0 or 1.

Example

The following command enables the signal track.

:CALCulate:MARKer:TRCKing:STATe ON or :CALCulate:MARKer:TRCKing:STATe 1

The following query returns 1.

:CALCulate:MARKer:TRCKing:STATe?

:CALCulate:MARKer<n>:CPSearch[:STATe]**Syntax**

:CALCulate:MARKer<n>:CPSearch[:STATe] OFF|ON|0|1

:CALCulate:MARKer<n>:CPSearch[:STATe]?

Description

Enables or disables continuous peak search function, and marks the peak value with n.

Queries the status of continuous peak search function.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—
—	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command performs the continuous peak search function, and marks with Marker 1.

:CALCulate:MARKer1:CPSeatch:STATe ON or :CALCulate:MARKer1:CPSeatch:STATe 1

The following query returns 1.

:CALCulate:MARKer1:CPSeatch:STATe?

:CALCulate:MARKer<n>:FCOunt:GATetime

Syntax

```
:CALCulate:MARKer<n>:FCOunt:GATetime <time>
:CALCulate:MARKer<n>:FCOunt:GATetime?
```

Description

Sets the gate time for Marker n. The unit is s.
Queries the gate time for Marker n.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—
<time>	Consecutive Real Number	1 μ s to 500 ms	100 ms

Remarks

This command is only available for GPSA mode.

Return Format

The query returns the gate time for Marker n in scientific notation.

Example

The following command sets the gate time for Marker 2 to 10 ms.
:CALCulate:MARKer2:FCOunt:GATetime 0.01

The following query returns 1.000000e-02.
:CALCulate:MARKer2:FCOunt:GATetime?

:CALCulate:MARKer<n>:FCOunt:GATetime:AUTO

Syntax

```
:CALCulate:MARKer<n>:FCOunt:GATetime:AUTO OFF|ON|0|1
:CALCulate:MARKer<n>:FCOunt:GATetime:AUTO?
```

Description

Turns on or off the auto gate time for Marker n.
Queries the status of the auto gate time for Marker n.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—
—	Bool	OFF ON 0 1	OFF 0

Remarks

This command is only available for GPSA mode.

Return Format

The query returns 1 or 0.

Example

The following command enables the auto gate time for Marker 2.
:CALCulate:MARKer2:FCOunt:GATetime:AUTO ON or :CALCulate:MARKer2:FCOunt:GATetime:AUTO 1
The following query returns 1.
:CALCulate:MARKer2:FCOunt:GATetime:AUTO?

:CALCulate:MARKer<n>:FCOunt[:STATe]**Syntax**

:CALCulate:MARKer<n>:FCOunt[:STATe] OFF|ON|0|1
 :CALCulate:MARKer<n>:FCOunt[:STATe]?

Description

Enables or disables the frequency counter function of the specified marker.
 Queries the status of the frequency counter function of the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—
—	Bool	OFF ON 0 1	OFF 0

Remarks

This command is only available for GPSA mode.

Return Format

The query returns 0 or 1.

Example

The following command enables the frequency counter function of Marker 2.
 :CALCulate:MARKer2:FCOunt:STATe ON or :CALCulate:MARKer2:FCOunt:STATe 1

The following query returns 1.
 :CALCulate:MARKer2:FCOunt:STATe?

:CALCulate:MARKer<n>:FCOunt:X?**Syntax**

:CALCulate:MARKer<n>:FCOunt:X?

Description

Queries the readout of the frequency counter of the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—

Remarks

This command is only available for GPSA mode.

Return Format

The query returns the readout in integer. Its unit is Hz.
 When the frequency counter function is disabled, the command returns NAN.

:CALCulate:MARKer<n>:FUNCTion

Syntax

:CALCulate:MARKer<n>:FUNCTion NOISe|BPOWer|BDENsity|OFF
:CALCulate:MARKer<n>:FUNCTion?

Description

Selects the special measurement type for the specified marker.
Queries the special measurement type of the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—
—	Keyword	NOISe BPOWer BDENsity OFF	OFF

Remarks

NOISe: indicates the noise measurement.
BPOWer: indicates the bandwidth power.
BDENsity: indicates the bandwidth density.
OFF: disables the measurements.

Return Format

The query returns NOIS, BPOW, BDEN, or OFF.

Example

The following command sets the measurement type of Marker 1 to noise measurement.
:CALCulate:MARKer1:FUNCTion NOISe

The following query returns NOIS.
:CALCulate:MARKer1:FUNCTion?

:CALCulate:MARKer<n>:FUNCTion:BAND:LEFT

Syntax

:CALCulate:MARKer<n>:FUNCTion:BAND:LEFT <freq>
:CALCulate:MARKer<n>:FUNCTion:BAND:LEFT?

Description

Sets the left edge frequency or time of the signal involved in the calculation for the band function.
Queries the left edge frequency or time of the signal involved in the calculation for the band function.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--
<freq>	Consecutive Real Number	0 to band right	center frequency-bandwidth/2 capture time/2-bandwidth/2 (PvT) sweep time/2-bandwidth/2 (zero span)

Remarks

This command is only valid when the corresponding bandwidth function is enabled.
This command is used to set the left edge time when the zero span is enabled in GPSA mode or when in the PvT view in RTSA mode.

Return Format

The query returns the left edge frequency or time of the signal in scientific notation.

Example

The following command sets the left edge frequency of the signal involved in the calculation for the Marker 1 band function to 2 MHz.

```
:CALCulate:MARKer1:FUNCTION:BAND:LEFT 2000000
```

The following query returns 2.000000000e+06.

```
:CALCulate:MARKer1:FUNCTION:BAND:LEFT?
```

:CALCulate:MARKer<n>:FUNCTION:BAND:RIGHT**Syntax**

```
:CALCulate:MARKer<n>:FUNCTION:BAND:RIGHT <freq>
```

```
:CALCulate:MARKer<n>:FUNCTION:BAND:RIGHT?
```

Description

Sets the right edge frequency or time of the signal involved in the calculation for the band function. Queries the right edge frequency or time of the signal involved in the calculation for the band function.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--
<freq>	Consecutive Real Number	band left to $+\infty$	center frequency+bandwidth/2 capture time/2+bandwidth/2 (PvT) sweep time/2+bandwidth/2 (zero span)

Remarks

This command is only valid when the corresponding bandwidth function is enabled.

This command is used to set the right edge time when the zero span is enabled in GPSA mode or when in the PvT view in RTSA mode.

Return Format

The query returns the right edge frequency or time of the signal in scientific notation.

Example

The following command sets the right edge frequency of the signal involved in the calculation for the Marker 1 band function to 4 GHz.

```
:CALCulate:MARKer1:FUNCTION:BAND:RIGHT 4000000000
```

The following query returns 4.000000000e+09.

```
:CALCulate:MARKer1:FUNCTION:BAND:RIGHT?
```

:CALCulate:MARKer<n>:FUNCTION:BAND:SPAN

Syntax

```
:CALCulate:MARKer<n>:FUNCTION:BAND:SPAN <freq>
:CALCulate:MARKer<n>:FUNCTION:BAND:SPAN?
```

Description

Sets the bandwidth or the time span of the signal involved in the calculation for the band function.
Queries the bandwidth or the time span of the signal involved in the calculation for the band function.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--
<freq>	Consecutive Real Number	0 to $+\infty$	span/2 capture time/20 (PvT) sweep time/20 (zero span)

Remarks

This command is only valid when the corresponding bandwidth function is enabled.
This command is used to set the signal time when the zero span is enabled in GPSA mode or when in the PvT view in RTSA mode.

Return Format

The query returns the bandwidth of the signal involved in the calculation for the band function in scientific notation.

Example

The following command sets the bandwidth of the signal involved in the calculation for the Marker 1 band function to 500 MHz.

```
:CALCulate:MARKer1:FUNCTION:BAND:SPAN 500000000
```

The following query returns 5.000000000e+08.

```
:CALCulate:MARKer1:FUNCTION:BAND:SPAN?
```

:CALCulate:MARKer<n>:FUNCTION:BAND:SPAN:AUTO

Syntax

```
:CALCulate:MARKer<n>:FUNCTION:BAND:SPAN:AUTO OFF|ON|0|1
:CALCulate:MARKer<n>:FUNCTION:BAND:SPAN:AUTO?
```

Description

Enables or disables the band span auto function.
Queries the status of band span auto function.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--
--	Bool	OFF ON 0 1	ON 1

Remarks

This command is only valid when the corresponding bandwidth function is enabled.

Return Format

The query returns 1 or 0.

Example

The following command enables the band span auto function of Marker 1.

:CALCulate:MARKer1:FUNCTION:BAND:SPAN:AUTO ON

or :CALCulate:MARKer1:FUNCTION:BAND:SPAN:AUTO 1

The following query returns 1.

:CALCulate:MARKer1:FUNCTION:BAND:SPAN:AUTO?

:CALCulate:MARKer<n>:LINes[:STATe]**Syntax**

:CALCulate:MARKer<n>:LINes[:STATe] OFF|ON|0|1

:CALCulate:MARKer<n>:LINes[:STATe]?

Description

Enables or disables the marker line of the specified marker.

Queries the status for the marker line of the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—
—	Bool	OFF ON 0 1	OFF

Remarks

If the marker is not visible in the selected area, enable the marker line function to extend the marker line to the display area for better observation.

The PvT only supports setting the marker on Trace 1.

Return Format

The query returns 0 or 1.

Example

The following command enables the marker line of Marker 1.

:CALCulate:MARKer1:LINes:STATe ON or :CALCulate:MARKer1:LINes:STATe 1

The following query returns 1.

:CALCulate:MARKer1:LINes:STATe?

:CALCulate:MARKer<n>:MAXimum:LEFT**Syntax**

:CALCulate:MARKer<n>:MAXimum:LEFT

Description

Searches for and marks the nearest peak which is located at the left side of the current peak and meets the peak search condition.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—

Remarks

When no peak is found, a prompt message "No peak found" is displayed on the screen.

Example

The following command performs one left peak search, and marks with Marker 2.

```
:CALCulate:MARKer2:MAXimum:LEFT
```

:CALCulate:MARKer<n>:MAXimum[:MAX]**Syntax**

```
:CALCulate:MARKer<n>:MAXimum[:MAX]
```

Description

Performs one peak search based on the search mode set by the [:CALCulate:MARKer:PEAK:SEARCh:MODE](#) command and marks it with the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—

Remarks

When no peak is found, a prompt message "No peak found" is displayed on the screen.

Example

The following command performs one peak search, and marks with Marker 2.

```
:CALCulate:MARKer2:MAXimum:MAX
```

:CALCulate:MARKer<n>:MAXimum:NEXT**Syntax**

```
:CALCulate:MARKer<n>:MAXimum:NEXT
```

Description

Searches for and marks the peak whose amplitude on the trace is next to that of the current peak and which meets the peak search condition.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—

Remarks

When no peak is found, a prompt message "No peak found" is displayed on the screen.

Example

The following command performs one next peak search, and marks with Marker 2.

```
:CALCulate:MARKer2:MAXimum:NEXT
```

:CALCulate:MARKer<n>:MAXimum:RIGHT**Syntax**

:CALCulate:MARKer<n>:MAXimum:RIGHT

Description

Searches for and marks the nearest peak which is located at the right side of the current peak and meets the peak search condition.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—

Remarks

When no peak is found, a prompt message "No peak found" is displayed on the screen.

Example

The following command performs one right peak search, and marks with Marker 2.

:CALCulate:MARKer2:MAXimum:RIGHT

:CALCulate:MARKer<n>:MINimum**Syntax**

:CALCulate:MARKer<n>:MINimum

Description

Searches for and marks the peak with the minimum amplitude on the trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—

Remarks

When no peak is found, a prompt message "No peak found" is displayed on the screen.

Example

The following command performs one minimum search, and marks it with Marker 2.

:CALCulate:MARKer2:MINimum

:CALCulate:MARKer<n>:MODE

Syntax

```
:CALCulate:MARKer<n>:MODE POSition|DELTA|FIXed|OFF
:CALCulate:MARKer<n>:MODE?
```

Description

Sets the type of the specified marker.

Queries the type of the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—
—	Keyword	POSition DELTA FIXed OFF	OFF

Remarks

POSition: indicates the normal marker.

DELTA: indicates difference between two data points.

FIXed: indicates that the marker is fixed.

OFF: turns off the selected marker.

The PvT only supports setting the marker on Trace 1.

Return Format

The query returns POS, DELT, FIX, or OFF.

Example

The following command sets the type of Marker 1 to Position.

```
:CALCulate:MARKer1:MODE POSition
```

The following query returns POS.

```
:CALCulate:MARKer1:MODE?
```

:CALCulate:MARKer<n>:PTPeak

Syntax

```
:CALCulate:MARKer<n>:PTPeak
```

Description

Performs the peak-peak search and marks it with a specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—

Remarks

After the command is executed, the marker mode of the specified marker selects "Delta" automatically. The peak search results will be marked by the reference marker (by default, the next marker), and the minimum search will be marked by the Delta marker.

Example

The following command performs the peak-peak search, and marks the peak-peak position with the reference marker (Marker 2) and the Delta marker (Marker 1), respectively.

```
:CALCulate:MARKer1:PTPeak
```

:CALCulate:MARKer<n>:REFerence

Syntax

```
:CALCulate:MARKer<n>:REFerence <integer>
```

```
:CALCulate:MARKer<n>:REFerence?
```

Description

Sets the reference marker for the specified marker.

Queries the reference marker for the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—
<integer>	Integer	1 to 8	By default, the marker following the specified marker is considered to be the reference marker.

Remarks

Each marker can have another marker to be its reference marker.

If the current marker is a Delta marker, the measurement result of the marker will be determined by the reference marker.

Any marker cannot have itself to be the reference marker.

The PvT only supports setting the marker on Trace 1.

Example

The following command sets the reference marker for Marker 1 to 2.

```
:CALCulate:MARKer1:REFerence 2
```

The following query returns 2.

```
:CALCulate:MARKer1:REFerence?
```

:CALCulate:MARKer<n>[:SET]:CENTer

Syntax

```
:CALCulate:MARKer<n>[:SET]:CENTer
```

Description

Sets the frequency of the specified marker to the center frequency of the analyzer.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—

Remarks

If the marker mode of the specified marker is Position or Fixed, the center frequency will be set to the frequency of the marker.

If the specified marker mode is Delta, the center frequency will be set to the frequency of the Delta marker.

This function is invalid in zero span.

This command is invalid for the PvT measurement mode in RTSA.

Example

The following command sets the frequency at Marker 1 (Position) to the center frequency.

```
:CALCulate:MARKer1:SET:CENTer
```

:CALCulate:MARKer<n>[:SET]:DELTA:CENTer

Syntax

:CALCulate:MARKer<n>[:SET]:DELTA:CENTer

Description

Sets the frequency difference of the specified Delta marker to the center frequency of the analyzer.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—

Remarks

It is only valid when the current marker mode is "Delta".

This function is invalid in zero span.

This command is invalid for the PVT measurement mode in RTSA.

Example

The following command sets the frequency difference of the Delta Marker 1 to the center frequency of the analyzer.

```
:CALCulate:MARKer1:SET:DELTA:CENTer
```

:CALCulate:MARKer<n>[:SET]:DELTA:SPAN

Syntax

:CALCulate:MARKer<n>[:SET]:DELTA:SPAN

Description

Sets the frequency difference of the specified Delta marker to the span of the analyzer.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—

Remarks

It is only valid when the current marker mode is "Delta".

This function is invalid in zero span.

This command is invalid for the PVT measurement mode in RTSA.

Example

The following command sets the frequency difference of the Delta Marker 1 to the span of the analyzer.

```
:CALCulate:MARKer1:SET:DELTA:SPAN
```


:CALCulate:MARKer<n>[:SET]:RLEVel

Syntax

:CALCulate:MARKer<n>[:SET]:RLEVel

Description

Sets the amplitude of the specified marker to the reference level of the analyzer.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—

Remarks

If the marker mode of the specified marker is Position or Fixed, the reference level will be set to the amplitude of the marker.

If the specified marker mode is Delta and the current marker is the reference marker, then the reference level is set to the amplitude of the reference marker; if the current marker is the Delta marker, then the reference level is set to the amplitude of the Delta marker.

Example

The following command sets the amplitude of Marker 2 (Position) to the reference level of the analyzer.

```
:CALCulate:MARKer2:SET:RLEVel
```

:CALCulate:MARKer<n>[:SET]:START

Syntax

:CALCulate:MARKer<n>[:SET]:START

Description

Sets the frequency of the specified marker to the start frequency of the analyzer.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—

Remarks

If the marker mode of the specified marker is Position or Fixed, the start frequency will be set to the frequency of the marker.

If the specified marker mode is Delta, the start frequency will be set to the frequency of the Delta marker.

This function is invalid in zero span.

This command is invalid for the PvT measurement mode in RTSA.

Example

The following command sets the frequency of Marker 3 (Position) to the start frequency of the analyzer.

```
:CALCulate:MARKer3:SET:START
```

:CALCulate:MARKer<n>[:SET]:STEP

Syntax

:CALCulate:MARKer<n>[:SET]:STEP

Description

Sets the frequency of the specified marker to the center frequency step of the analyzer.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—

Remarks

If the marker mode of the specified marker is Position or Fixed, the center frequency step will be set to the frequency of the marker.

If the specified marker mode is Delta, the center frequency step will be set to the frequency difference between the Delta marker and the reference marker.

This function is invalid in zero span.

This command is invalid for the PVT measurement mode in RTSA.

Example

The following command sets the frequency of Marker 4 (Position) to the center frequency step of the analyzer.

```
:CALCulate:MARKer4:SET:STEP
```

:CALCulate:MARKer<n>[:SET]:STOP

Syntax

:CALCulate:MARKer<n>[:SET]:STOP

Description

Sets the frequency of the specified marker to the stop frequency of the analyzer.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—

Remarks

If the marker mode of the specified marker is Position or Fixed, the stop frequency will be set to the frequency of the marker.

If the specified marker mode is Delta, the stop frequency will be set to the frequency of the Delta marker.

This function is invalid in zero span.

This command is invalid for the PVT measurement mode in RTSA.

Example

The following command sets the frequency of Marker 2 (Position) to the stop frequency of the analyzer.

```
:CALCulate:MARKer2:SET:STOP
```

:CALCulate:MARKer<n>:STATe

Syntax

```
:CALCulate:MARKer<n>:STATe OFF|ON|0|1
:CALCulate:MARKer<n>:STATe?
```

Description

Enables or disables the specified marker.
Queries the status for the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—
—	Bool	OFF ON 0 1	OFF 0

Remarks

If the specified marker is disabled currently, by default, the marker mode is "Position" when you send the command to enable the marker.
The PvT only supports setting the marker on Trace 1.

Return Format

The query returns 0 or 1.

Example

The following command enables Marker 1.

```
:CALCulate:MARKer1:STATe ON or :CALCulate:MARKer1:STATe 1
```

The following query returns 1.

```
:CALCulate:MARKer1:STATe?
```

:CALCulate:MARKer<n>:TRACe

Syntax

```
:CALCulate:MARKer<n>:TRACe <integer>
:CALCulate:MARKer<n>:TRACe?
```

Description

Sets the marker trace for the specified marker.
Queries the marker trace for the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—
<integer>	Discrete	1 2 3 4 5 6	1

Remarks

<integer> indicates the marker trace, and its range is from Trace 1 to Trace 6. The selected trace must be enabled.

You can also run the [:CALCulate:MARKer<n>:TRACe:AUTO](#) command to set the marker trace of the specified marker to "Auto".

The PvT does not support this command.

Return Format

The query returns any integer from 1 to 6.

If the marker trace is set to "Auto", the query command returns a trace number on which the marker is placed.

Example

The following command sets the marker trace of Marker 1 to Trace 2.

:CALCulate:MARKer1:TRACe 2

The following query returns 2.

:CALCulate:MARKer1:TRACe?

:CALCulate:MARKer<n>:TRACe:AUTO**Syntax**

:CALCulate:MARKer<n>:TRACe:AUTO OFF|ON|0|1

:CALCulate:MARKer<n>:TRACe:AUTO?

Description

Enables or disables the auto trace marking of the specified marker.

Queries the status of the auto trace marking of the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—
—	Bool	OFF ON 0 1	ON 1

Remarks

When you disable the auto marking of the trace, the currently enabled marker will stay on the corresponding trace.

The PvT does not support this command.

Return Format

The query returns 0 or 1.

Example

The following command sets the marker trace of Marker 1 to Auto.

:CALCulate:MARKer1:TRACe:AUTO ON or :CALCulate:MARKer1:TRACe:AUTO 1

The following query returns 1.

:CALCulate:MARKer1:TRACe:AUTO?

:CALCulate:MARKer<n>:X

Syntax

```
:CALCulate:MARKer<n>:X <param>
:CALCulate:MARKer<n>:X?
```

Description

Sets the X-axis value of the specified marker. Its default unit is Hz.

Queries the X-axis value of the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—
<param>	Consecutive Real Number	Refer to " Remarks "	—

Remarks

If the readout mode is frequency, it cannot exceed the frequency range of the sweep and the units available are Hz (default), kHz, MHz, and GHz.

If the readout mode is time, it cannot exceed the time range of the sweep and the units available are s (default), μs, ms, and ks.

<param> can be any value within the available range of the current X axis.

If the marker mode of the specified marker is Position or Fixed, this command sets the X value of the marker.

If the specified marker mode is Delta, this command sets the X value of the delta marker relative to the reference marker.

The PvT only supports setting the marker on Trace 1.

Return Format

The query returns the X-axis value of the marker in scientific notation.

Example

The following command sets the X-axis value of Marker 1 to 150 MHz (the readout mode is frequency).

```
:CALCulate:MARKer1:X 150000000
```

The following query returns 1.500000000e+08.

```
:CALCulate:MARKer1:X?
```

:CALCulate:MARKer<n>:X:READout

Syntax

```
:CALCulate:MARKer<n>:X:READout FREQuency|TIME|ITIME|PERiod
:CALCulate:MARKer<n>:X:READout?
```

Description

Sets the readout mode of the X axis of the specified marker.

Queries the readout mode of the X axis of the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—
—	Keyword	FREQuency TIME ITIME PERiod	Refer to " Remarks "

Remarks

FREQuency: indicates frequency. It is the default readout mode in non-zero span mode.

TIME: indicates time. It is the default readout mode in zero span mode.

ITIME: indicates the reciprocal of time. It is available only in zero span mode and a Delta marker is selected.

PERiod: indicates period. It is not available in zero span mode.

The PvT does not support this command.

Return Format

The query returns FREQ, TIME, ITIM, or PER.

Example

The following command sets the readout mode of the X axis of Marker 1 to "Time".

```
:CALCulate:MARKer1:X:READout TIME
```

The following query returns TIME.

```
:CALCulate:MARKer1:X:READout?
```

:CALCulate:MARKer<n>:X:READout:AUTO**Syntax**

```
:CALCulate:MARKer<n>:X:READout:AUTO OFF|ON|0|1
```

```
:CALCulate:MARKer<n>:X:READout:AUTO?
```

Description

Enables or disables the auto readout mode of the specified marker.

Queries the auto readout mode of the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—
—	Bool	OFF ON 0 1	ON 1

Remarks

When the auto readout mode is enabled, if the marker trace changes, the readout mode will be re-determined based on the destination trace.

The PvT does not support this command.

Return Format

The query returns 0 or 1.

Example

The following command enables the auto readout mode of Marker 1 in the X-axis.

```
:CALCulate:MARKer1:X:READout:AUTO ON or :CALCulate:MARKer1:X:READout:AUTO 1
```

The following query returns 1.

```
:CALCulate:MARKer1:X:READout:AUTO?
```

:CALCulate:MARKer<n>:Y

Syntax

:CALCulate:MARKer<n>:Y <amp>

:CALCulate:MARKer<n>:Y?

Description

Sets the Y-axis value of the specified fixed marker.

Queries the Y-axis value of the specified marker, and its default unit is dBm.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—
<amp>	Consecutive Real Number	-170 dBm to 30 dBm	—

Remarks

This setting command is only available when there is only one marker and it is a fixed marker.

If the marker mode of the specified marker is Position or Fixed, the query command queries the Y value of the marker.

If the marker mode of the specified marker is Delta, the query command queries the Y-axis difference between the reference marker and the Delta marker.

The PvT only supports setting the marker on Trace 1.

Return Format

The query returns the Y-axis value in scientific notation.

Example

The following command sets the Y-axis value of Marker 1 is -59.6 dBm.

:CALCulate:MARKer1:Y -59.6

The following query returns -5.960000000e+01.

:CALCulate:MARKer1:Y?

:CALCulate:MARKer<n>:Z:POSition

Syntax

:CALCulate:MARKer<n>:Z:POSition <integer>

:CALCulate:MARKer<n>:Z:POSition?

Description

Sets the trace number of the trace where the marker stays in the Spectrogram view.

Queries the trace number of the trace where the marker stays in the Spectrogram view.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	—
<integer>	Integer	1 to 8192	1

Remarks

Only when you select the Spectrogram view of the Spectrogram, Density Spectrogram or PvT Spectrogram in RTSA mode, can this command be effective.

Return Format

The query returns the trace number in integer.

Example

The following command sets the trace number of the trace where the marker1 stays in to 100.

```
:CALCulate:MARKer1:Z:POSition 100
```

The following query returns 100.

```
:CALCulate:MARKer1:Z:POSition?
```

:CALCulate:MATH**Syntax**

```
:CALCulate:MATH
```

```
<trace_destination>,<function_math>,<trace1_operation>,<trace2_operation>,<rel_offset>,<rel_reference>
```

```
:CALCulate:MATH? TRACE1|TRACE2|TRACE3|TRACE4|TRACE5|TRACE6
```

Description

Sets mathematical operations between traces and, in some cases, user-defined offsets.

Queries the math operation function of the specified trace.

Parameter

Name	Type	Range	Default
<trace_destination>	Keyword	TRACE1 TRACE2 TRACE3 TRACE4 TRACE5 TRACE6	—
<function_math>	Keyword	PDIFference PSUM LOFFset LMOFFset LDIFference OFF	OFF
<trace1_operation>	Keyword	TRACE1 TRACE2 TRACE3 TRACE4 TRACE5 TRACE6	TRACE5
<trace2_operation>	Keyword	TRACE1 TRACE2 TRACE3 TRACE4 TRACE5 TRACE6	TRACE6
<rel_offset>	Consecutive Real Number	-100 dB to 100 dB	0 dB
<rel_reference>	Consecutive Real Number	-170 dBm to 30 dBm	0 dBm

Remarks

PDIFference: indicates the power difference between Operand 1 and Operand 2.

PSUM: indicates the power sum between Operand 1 and Operand 2.

LOFFset: indicates the sum between Operand 1 and the offset parameter <rel_offset>.

LMOFFset: indicates the difference between Operand 1 and the offset parameter <rel_offset>.

LDIFference: indicates that Operand 1 (Op1) minus Operand 2 (Op2), and then plus the reference parameter value <rel_reference>.

OFF: disables the operation function.

<rel_offset> indicates the log offset, and its unit is dB; <rel_reference> indicates the log reference, and its unit is dBm.

For certain operation, if some parameters are irrelevant in the operation, you can replace these parameters with "," in the command. The returned parameters are separated by commas. The returned results of the irrelevant parameters are undefined. The empty fields are replaced by ",".

Return Format

The query returns the operation function of the specified trace, namely, PDIF, PSUM, LOFF, LMOFF, LDIF, or OFF.

Example

The following command sets Trace 1 to the power difference math operation, and sets Operand Trace 1 to Trace 4 and Operand Trace 2 to Trace 5.

:CALCulate:MATH TRACE1,PDIFference,TRACE4,TRACE5,,

The following query returns PDIFference.

:CALCulate:MATH? TRACE1

:CALCulate:NTData[:STATe]

Syntax

:CALCulate:NTData[:STATe] OFF|ON|0|1

:CALCulate:NTData[:STATe]?

Description

Enables or disables the normalize function.

Queries the status of normalization.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

This command is only available for RSA3030E-TG/RSA3015E-TG working in GPSA mode.

This command is only valid when the tracking generator function is enabled.

Return Format

The query returns 0 or 1.

Example

The following command enables normalization.

:CALCulate:NTData:STATe ON or :CALCulate:NTData:STATe 1

The following query returns 1.

:CALCulate:NTData:STATe?

:CALibration Commands

Command List:

- ◆ [:CALibration:\[ALL\]](#)
- ◆ [:CALibration:AUTO](#)

:CALibration:[ALL]

Syntax

:CALibration:[ALL]

Description

Executes self-calibration immediately.

Remarks

If the self-calibration succeeded, the command :CALibration:[ALL]? returns 0; if failed, the command :CALibration:[ALL]? returns 1.

Example

The following command executes the self-calibration immediately.
:CALibration:ALL

:CALibration:AUTO

Syntax

:CALibration:AUTO OFF|ON|0|1
:CALibration:AUTO?

Description

Enables or disables auto calibration.
Query the setting status of auto calibration.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command enables auto calibration.
:CALibration:AUTO ON or :CALibration:AUTO 1

The following query returns 1.
:CALibration:AUTO?

:CONFigure Commands

Command List:

- ◆ [:CONFigure?](#)
- ◆ [:CONFigure:ACPower*](#)
- ◆ [:CONFigure:CNRatio*](#)
- ◆ [:CONFigure:DENSity](#)
- ◆ [:CONFigure:DSPEctrogram](#)
- ◆ [:CONFigure:EBWidth*](#)
- ◆ [:CONFigure:HDISt*](#)
- ◆ [:CONFigure:LPSTep](#)
- ◆ [:CONFigure:MCHPower*](#)
- ◆ [:CONFigure:NORMal](#)
- ◆ [:CONFigure:OBWidth*](#)
- ◆ [:CONFigure:PSGRam](#)
- ◆ [:CONFigure:PSpectrum](#)
- ◆ [:CONFigure:PVT](#)
- ◆ [:CONFigure:SANalyzer](#)
- ◆ [:CONFigure:SPEctrogram](#)
- ◆ [:CONFigure:TOI*](#)
- ◆ [:CONFigure:TPOWer*](#)

Remarks:

The commands with * are only available for the RSA3000E series that has been installed with advanced measurement kit option.

:CONFigure?

Syntax

:CONFigure?

Description

Queries the current measurement function.

Return Format

The query returns SAN, TPOW, ACP, MCHP, OBW, EBW, CNR, HARM, TOI, NORM, DENS, SPEC, DSPE, PVT, PSP, or PSGR. The explanations for the return results are as follows: SAN (swept SA), TPOW (time-domain power), ACP (adjacent power), MCHP (multi-channel power), OBW (occupied bandwidth), EBW (emission bandwidth), CNR (carrier/noise ratio), HARM (harmonics distortion), TOI (third-order intercept), NORM (Normal), DENS (Density), SPEC (Spectrogram), DSPE (Density Spectrogram), PVT (power versus time), PSP (PvT Spectrum), PSGR (PvT Spectrogram).

:CONFigure:ACPower

Syntax

:CONFigure:ACPower

Description

Sets the analyzer to be in the ACP measurement state.

Remarks

This command is only available for GPSA mode.

Running this command will discontinue the current measurement and restore the specified measurement of the instrument to the default factory state.

After changing any measurement setup, running the [:READ Commands](#) will initialize the measurement, and you do not have to set the measurement to the default.

:CONFigure:CNRatio

Syntax

:CONFigure:CNRatio

Description

Sets the analyzer to be in the CNR measurement state.

Remarks

This command is only available for GPSA mode.

Running this command will discontinue the current measurement and restore the specified measurement of the instrument to the default factory state.

After changing any measurement setup, running the [:READ Commands](#) will initialize the measurement, and you do not have to set the measurement to the default.

:CONFigure:DENSity

Syntax

:CONFigure:DENSity

Description

Sets the analyzer to be in the Density measurement state.

Remarks

This command is only available for RTSA mode.

Running this command will discontinue the current measurement and restore the specified measurement of the instrument to the default factory state.

:CONFigure:DSPEctrogram

Syntax

:CONFigure:DSPEctrogram

Description

Sets the analyzer to be in the Density Spectrogram measurement state.

Remarks

This command is only available for RTSA mode.

Running this command will discontinue the current measurement and restore the specified measurement of the instrument to the default factory state.

:CONFigure:EBWidth

Syntax

:CONFigure:EBWidth

Description

Sets the analyzer to be in the EBW measurement state.

Remarks

This command is only available for GPSA mode.

Running this command will discontinue the current measurement and restore the specified measurement of the instrument to the default factory state.

After changing any measurement setup, running the [:READ Commands](#) will initialize the measurement, and you do not have to set the measurement to the default.

:CONFigure:HDIST

Syntax

:CONFigure:HDIST

Description

Sets the analyzer to be in the harmonic distortion measurement state.

Remarks

This command is only available for GPSA mode.

Running this command will discontinue the current measurement and restore the specified measurement of the instrument to the default factory state.

After changing any measurement setup, running the [:READ Commands](#) will initialize the measurement, and you do not have to set the measurement to the default.

:CONFigure:LPSTep

Syntax

:CONFigure:LPSTep

Description

Resets all the parameters in the current measurement mode.

:CONFigure:MCHPower

Syntax

:CONFigure:MCHPower

Description

Sets the analyzer to be in the MCHP measurement state.

Remarks

This command is only available for GPSA mode.

Running this command will discontinue the current measurement and restore the specified measurement of the instrument to the default factory state.

After changing any measurement setup, running the [:READ Commands](#) will initialize the measurement, and you do not have to set the measurement to the default.

:CONFigure:NORMal

Syntax

:CONFigure:NORMal

Description

Sets the analyzer to be in the Normal measurement state.

Remarks

This command is only available for RTSA mode.

Running this command will discontinue the current measurement and restore the specified measurement of the instrument to the default factory state.

:CONFigure:OBWidth

Syntax

:CONFigure:OBWidth

Description

Sets the analyzer to be in the OBW measurement state.

Remarks

This command is only available for GPSA mode.

Running this command will discontinue the current measurement and restore the specified measurement of the instrument to the default factory state.

After changing any measurement setup, running the [:READ Commands](#) will initialize the measurement, and you do not have to set the measurement to the default.

:CONFigure:PSGRam

Syntax

:CONFigure:PSGRam

Description

Sets the analyzer to be in the PVT Spectrogram measurement state.

Remarks

This command is only available for RTSA mode.

Running this command will discontinue the current measurement and restore the specified measurement of the instrument to the default factory state.

:CONFigure:PSpectrum

Syntax

:CONFigure:PSpectrum

Description

Sets the analyzer to be in the PVT Spectrum measurement state.

Remarks

This command is only available for RTSA mode.

Running this command will discontinue the current measurement and restore the specified measurement of the instrument to the default factory state.

:CONFigure:PVT

Syntax

:CONFigure:PVT

Description

Sets the analyzer to be in the PVT measurement state.

Remarks

This command is only available for RTSA mode.

Running this command will discontinue the current measurement and restore the specified measurement of the instrument to the default factory state.

:CONFigure:SANalyzer

Syntax

:CONFigure:SANalyzer

Description

This command is only available for GPSA mode.

This command will disable the currently activated measurement function, and set the analyzer to the swept SA mode.

:CONFigure:SPEctrogram

Syntax

:CONFigure:SPEctrogram

Description

Sets the analyzer to be in the Spectrogram measurement state.

Remarks

This command is only available for RTSA mode.

Running this command will discontinue the current measurement and restore the specified measurement of the instrument to the default factory state.

:CONFigure:TOI

Syntax

:CONFigure:TOI

Description

Sets the analyzer to be in the TOI measurement state.

Remarks

This command is only available for GPSA mode.

Running this command will discontinue the current measurement and restore the specified measurement of the instrument to the default factory state.

After changing any measurement setup, running the [:READ Commands](#) will initialize the measurement, and you do not have to set the measurement to the default.

:CONFigure:TPOWer

Syntax

:CONFigure:TPOWer

Description

Sets the analyzer to be in the time-domain power measurement state.

Remarks

This command is only available for GPSA mode.

Running this command will discontinue the current measurement and restore the specified measurement of the instrument to the default factory state.

After changing any measurement setup, running the [:READ Commands](#) will initialize the measurement, and you do not have to set the measurement to the default.

:COUPle Command

Command List:

◆ [:COUPle](#)

:COUPle

Syntax

:COUPle ALL

Description

Sets all the manual/auto settings in the current measurement mode to "Auto".

:DISPlay Commands

Command List:

- ◆ [:DISPlay:BACKlight](#)
- ◆ [:DISPlay:ENABle](#)
- ◆ [:DISPlay:GRATicule\[:STATe\]](#)
- ◆ [:DISPlay:HDMI\[:STATe\]](#)
- ◆ [:DISPlay:PVTime:WINDow:TRACe:X\[:SCALe\]:COUPle](#)
- ◆ [:DISPlay:PVTime:WINDow:TRACe:X\[:SCALe\]:PDIVision](#)
- ◆ [:DISPlay:PVTime:WINDow:TRACe:X\[:SCALe\]:RLEVel](#)
- ◆ [:DISPlay:PVTime:WINDow:TRACe:X\[:SCALe\]:RPOSition](#)
- ◆ [:DISPlay:PVTime:WINDow:TRACe:Y\[:SCALe\]:PDIVision](#)
- ◆ [:DISPlay:PVTime:WINDow:TRACe:Y\[:SCALe\]:RLEVel <real>](#)
- ◆ [:DISPlay:VIEW:DENSity:AADJust](#)
- ◆ [:DISPlay:VIEW:DENSity:CNONlinear](#)
- ◆ [:DISPlay:VIEW:DENSity:CPALettes](#)
- ◆ [:DISPlay:VIEW:DENSity:HDHue](#)
- ◆ [:DISPlay:VIEW:DENSity:LDHue](#)
- ◆ [:DISPlay:VIEW:DENSity:PERsistence](#)
- ◆ [:DISPlay:VIEW:DENSity:PERsistence:INFinite](#)
- ◆ [:DISPlay:VIEW\[:SElect\]](#)
- ◆ [:DISPlay:VIEW:SPECTrogram:AADJust](#)
- ◆ [:DISPlay:VIEW:SPECTrogram:BOTTom](#)
- ◆ [:DISPlay:VIEW:SPECTrogram:HUE](#)
- ◆ [:DISPlay:VIEW:SPECTrogram:POSition](#)
- ◆ [:DISPlay:VIEW:SPECTrogram:REFerence](#)
- ◆ [:DISPlay:VIEW:SPECTrogram:TRACe:COUPle](#)
- ◆ [:DISPlay:VIEW:SPECTrogram:TRACe:SElection](#)
- ◆ [:DISPlay:WINDow:SElect](#)
- ◆ [:DISPlay:WINDow:TRACe:Y:DLINe](#)
- ◆ [:DISPlay:WINDow:TRACe:Y:DLINe:STATe](#)
- ◆ [:DISPlay:WINDow:TRACe:Y\[:SCALe\]:NRLevel*](#)
- ◆ [:DISPlay:WINDow:TRACe:Y\[:SCALe\]:NRPosition*](#)
- ◆ [:DISPlay:WINDow:TRACe:Y\[:SCALe\]:PDIVision](#)
- ◆ [:DISPlay:WINDow:TRACe:Y\[:SCALe\]:RLEVel](#)
- ◆ [:DISPlay:WINDow:TRACe:Y\[:SCALe\]:RLEVel:OFFSet](#)
- ◆ [:DISPlay:WINDow:TRACe:Y\[:SCALe\]:SPACing](#)

Remarks:

The commands with * are only available for RSA3030E-TG/RSA3015E-TG.

:DISPlay:BACKlight

Syntax

:DISPlay:BACKlight <integer>
:DISPlay:BACKlight?

Description

Sets the brightness of the backlight of LCD.
Queries the brightness of the backlight of LCD.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 100	100

Return Format

The query returns the brightness of the LCD backlight in integer.

Example

The following command sets the brightness of the LCD backlight to 50.
:DISPlay:BACKlight 50

The following query returns 50.
:DISPlay:BACKlight?

:DISPlay:ENABLE

Syntax

:DISPlay:ENABLE OFF|ON|0|1
:DISPlay:ENABLE?

Description

Turns on or off the LCD.
Queries the status of the LCD.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command enables the LCD.
:DISPlay:ENABLE ON or :DISPlay:ENABLE 1

The following query returns 1.
:DISPlay:ENABLE?

:DISPlay:GRATicule[:STATe]

Syntax

:DISPlay:GRATicule[:STATe] OFF|ON|0|1
:DISPlay:GRATicule[:STATe]?

Description

Enables or disables the display of the graticule.
Queries the display of the graticule.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command enables display of the graticule.
:DISPlay:GRATicule:STATe ON or :DISPlay:GRATicule:STATe 1

The following query returns 1.
:DISPlay:GRATicule:STATe?

:DISPlay:HDMI[:STATe]

Syntax

:DISPlay:HDMI[:STATe] OFF|ON|0|1
:DISPlay:HDMI[:STATe]?

Description

Enables or disables HDMI.
Queries the status of HDMI.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command enables HDMI.
:DISPlay:HDMI:STATe ON or :DISPlay:HDMI:STATe 1

The following query returns 1.
:DISPlay:HDMI:STATe?

:DISPlay:PVTime:WINDow:TRACe:X[:SCALe]:COUPle**Syntax**

:DISPlay:PVTime:WINDow:TRACe:X[:SCALe]:COUPle OFF|ON|0|1
 :DISPlay:PVTime:WINDow:TRACe:X[:SCALe]:COUPle?

Description

Enables or disables the auto scale function for the horizontal axis in the PvT view.
 Queries the status of the auto scale function for the horizontal axis in the PvT view.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	ON 1

Remarks

This command is only valid when the PvT view in RTSA mode is selected.

Return Format

The query returns 1 or 0.

Example

The following command enables the auto scale function for the horizontal axis in the PvT view.

:DISPlay:PVTime:WINDow:TRACe:X:SCALe:COUPle ON
 or :DISPlay:PVTime:WINDow:TRACe:X:SCALe:COUPle 1

The following query returns 1.

:DISPlay:PVTime:WINDow:TRACe:X:SCALe:COUPle?

:DISPlay:PVTime:WINDow:TRACe:X[:SCALe]:PDIVision**Syntax**

:DISPlay:PVTime:WINDow:TRACe:X[:SCALe]:PDIVision <time>
 :DISPlay:PVTime:WINDow:TRACe:X[:SCALe]:PDIVision?

Description

Sets the unit per division in the horizontal axis of the PvT view.
 Queries the unit per division in the horizontal axis of the PvT view.

Parameter

Name	Type	Range	Default
<time>	Consecutive Real Number	20 μ s to 4 s	acquisition time/10

Remarks

This command is only valid when the PvT view in RTSA mode is selected.

Return Format

The query returns the X-axis scale value in scientific notation.

Example

The following command sets the horizontal scale in the PvT view to 40 μ s.

:DISPlay:PVTime:WINDow:TRACe:X:SCALe:PDIVision 0.00004

The following query returns 4.000000000e-07.
:DISPlay:PVTime:WINDow:TRACe:X:SCALe:PDIVision?

:DISPlay:PVTime:WINDow:TRACe:X[:SCALe]:RLEVel

Syntax

:DISPlay:PVTime:WINDow:TRACe:X[:SCALe]:RLEVel <real>
:DISPlay:PVTime:WINDow:TRACe:X[:SCALe]:RLEVel?

Description

Sets the reference time for the horizontal axis in the PvT view.
Queries the reference time for the horizontal axis in the PvT view.

Parameter

Name	Type	Range	Default
<real>	Consecutive Real Number	-1 s to 40 s	0 μ s

Remarks

This command is only valid when the PvT view in RTSA mode is selected.

Return Format

The query returns the reference time for the horizontal axis in scientific notation.

Example

The following command sets the reference time for the horizontal axis in the PvT view to 2 s.
:DISPlay:PVTime:WINDow:TRACe:X:SCALe:RLEVel 2

The following query returns 2.000000000e+00.
:DISPlay:PVTime:WINDow:TRACe:X:SCALe:RLEVel?

:DISPlay:PVTime:WINDow:TRACe:X[:SCALe]:RPOSition

Syntax

:DISPlay:PVTime:WINDow:TRACe:X[:SCALe]:RPOSition LEFT|CENTer|RIGHT
:DISPlay:PVTime:WINDow:TRACe:X[:SCALe]:RPOSition?

Description

Sets the position of the reference time in the horizontal axis of the PvT view.
Queries the position of the reference time in the horizontal axis of the PvT view.

Parameter

Name	Type	Range	Default
--	Keyword	LEFT CENTer RIGHT	LEFT

Remarks

This command is only valid when the PvT view in RTSA mode is selected.

Return Format

The query returns LEFT, CENT, or RIGH.

Example

The following command sets the position of the reference time in the horizontal axis of the PvT view to

"Left".

```
:DISPlay:PVTime:WINDow:TRACe:X:SCALe:RPOSition LEFT
```

The following query returns LEFT.

```
:DISPlay:PVTime:WINDow:TRACe:X:SCALe:RPOSition?
```

:DISPlay:PVTime:WINDow:TRACe:Y[:SCALe]:PDIVision

Syntax

```
:DISPlay:PVTime:WINDow:TRACe:Y[:SCALe]:PDIVision <rel_ampl>
```

```
:DISPlay:PVTime:WINDow:TRACe:Y[:SCALe]:PDIVision?
```

Description

Sets the unit per division in the vertical axis of the PvT view.

Queries the unit per division in the vertical axis of the PvT view.

Parameter

Name	Type	Range	Default
<time>	Consecutive Real Number	0.1 dB to 20 dB	10 dB

Remarks

This command is only valid when the PvT view in RTSA mode is selected.

Return Format

The query returns the Y-axis scale value in scientific notation.

Example

The following command sets the vertical scale in the PvT view to 15 dB.

```
:DISPlay:PVTime:WINDow:TRACe:Y:SCALe:PDIVision 15
```

The following query returns 1.500000000e+01.

```
:DISPlay:PVTime:WINDow:TRACe:Y:SCALe:PDIVision?
```

:DISPlay:PVTime:WINDow:TRACe:Y[:SCALe]:RLEVel <real>

Syntax

```
:DISPlay:PVTime:WINDow:TRACe:Y[:SCALe]:RLEVel <real>
```

```
:DISPlay:PVTime:WINDow:TRACe:Y[:SCALe]:RLEVel?
```

Description

Sets the reference level for the vertical axis in the PvT view.

Queries the reference level for the vertical axis in the PvT view.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3	1
<real>	Consecutive Real Number	-250 dBm to 250 dBm	0 dBm

Remarks

This command is only valid when the PvT view in RTSA mode is selected.

Return Format

The query returns the reference level for the vertical axis in scientific notation.

Example

The following command sets the reference level for the vertical axis in the PvT view to 100 dBm.

```
:DISPlay:PVTime:WINDow:TRACe:Y:SCALe:RLEVel 100
```

The following query returns 1.000000000e+02.

```
:DISPlay:PVTime:WINDow2:TRACe:Y:SCALe:RLEVel?
```

:DISPlay:VIEW:DENSity:AADJust**Syntax**

```
:DISPlay:VIEW:DENSity:AADJust
```

Description

Sets the highest density hue to the highest density value found in the current bitmap; sets the lowest density hue to the lowest non-zero density value found in the current bitmap.

Remarks

This command is only available for Density and Density Spectrogram in RTSA mode.

:DISPlay:VIEW:DENSity:CNONlinear**Syntax**

```
:DISPlay:VIEW:DENSity:CNONlinear <real>
```

```
:DISPlay:VIEW:DENSity:CNONlinear?
```

Description

Sets the curve nonlinearity.

Queries the curve nonlinearity.

Parameter

Name	Type	Range	Default
<real>	Consecutive Real Number	-100 to 100	75

Remarks

This command is only available for Density and Density Spectrogram in RTSA mode.

Within the range between the highest density hue and lowest density hue, setting the curve nonlinearity can change the gradient among different density hues, making the displayed results move towards either the higher or lower end of the gradient. Increasing the curve nonlinearity value will compress the colors towards the higher end of the color bar, and decreasing the nonlinearity value will compress the colors towards the lower end of the color bar.

Return Format

The query returns the curve nonlinearity value in scientific notation.

Example

The following command sets the curve nonlinearity value to 50.

```
:DISPlay:VIEW:DENSity:CNONlinear 50
```

The following query returns 5.000000e+01.

```
:DISPlay:VIEW:DENSity:CNONlinear?
```


:DISPlay:VIEW:DENSity:CPALettes

Syntax

:DISPlay:VIEW:DENSity:CPALettes COOL|WARM|RADar|FIRE|FROSt
:DISPlay:VIEW:DENSity:CPALettes?

Description

Sets the color palette of Density.
Queries the color palette of Density.

Parameter

Name	Type	Range	Default
—	Keyword	COOL WARM RADar FIRE FROSt	WARM

Remarks

This command is only available for Density and Density Spectrogram in RTSA mode.

Return Format

The query returns COOL, WARM, RAD, FIRE, or FROS.

Example

The following command sets the color palette of Density to Cool.
:DISPlay:VIEW:DENSity:CPALettes COOL

The following query returns COOL.
:DISPlay:VIEW:DENSity:CPALettes?

:DISPlay:VIEW:DENSity:HDHue

Syntax

:DISPlay:VIEW:DENSity:HDHue <real>
:DISPlay:VIEW:DENSity:HDHue?

Description

Sets the highest density hue.
Queries the highest density hue.

Parameter

Name	Type	Range	Default
<real>	Consecutive Real Number	0.1 to 100	100

Remarks

This command is only available for Density and Density Spectrogram in RTSA mode.

Return Format

The query returns the highest density hue in scientific notation.

Example

The following command sets the highest density hue to 60.
:DISPlay:VIEW:DENSity:HDHue 60

The following query returns 6.000000e+01.
:DISPlay:VIEW:DENSity:HDHue?

:DISPlay:VIEW:DENSity:LDHue

Syntax

:DISPlay:VIEW:DENSity:LDHue <real>
:DISPlay:VIEW:DENSity:LDHue?

Description

Sets the lowest density hue.

Queries the lowest density hue.

Parameter

Name	Type	Range	Default
<real>	Consecutive Real Number	0 to 99.9	0

Remarks

This command is only available for Density and Density Spectrogram in RTSA mode.

Return Format

The query returns the lowest density hue in scientific notation.

Example

The following command sets the lowest density hue to 30.

:DISPlay:VIEW:DENSity:LDHue 30

The following query returns 3.000000e+01.

:DISPlay:VIEW:DENSity:LDHue?

:DISPlay:VIEW:DENSity:PERSistence

Syntax

:DISPlay:VIEW:DENSity:PERSistence <time>
:DISPlay:VIEW:DENSity:PERSistence?

Description

Sets the persistence time.

Queries the persistence time.

Parameter

Name	Type	Range	Default
<time>	Consecutive Real Number	0 s to 10 s	300 ms

Remarks

This command is only available for Density and Density Spectrogram in RTSA mode.

Return Format

The query returns the persistence time in scientific notation.

Example

The following command sets the persistence time to 5 s.

:DISPlay:VIEW:DENSity:PERSistence 5

The following query returns 5.000000e+00.

:DISPlay:VIEW:DENSity:PERSistence?

:DISPlay:VIEW:DENSity:PERsistence:INFinite**Syntax**

:DISPlay:VIEW:DENSity:PERsistence:INFinite OFF|ON|0|1
 :DISPlay:VIEW:DENSity:PERsistence:INFinite?

Description

Enables or disables the infinite mode of the persistence time.
 Queries the status of the infinite mode of the persistence time.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

This command is only available for Density and Density Spectrogram in RTSA mode.

Return Format

The query returns 0 or 1.

Example

The following command enables the infinite mode of the persistence time.

:DISPlay:VIEW:DENSity:PERsistence:INFinite ON or :DISPlay:VIEW:DENSity:PERsistence:INFinite 1

The following query returns 1.

:DISPlay:VIEW:DENSity:PERsistence:INFinite?

:DISPlay:VIEW[:SElect]**Syntax**

:DISPlay:VIEW[:SElect] NORMal|SPECTrogram|DENSity|DSPectrogram|PVT|PVTspectrum|PSPectrogram
 :DISPlay:VIEW[:SElect]?

Description

Sets the current display view.
 Queries the current display view.

Parameter

Name	Type	Range	Default
—	Keyword	NORMal SPECTrogram DENSity DSPectrogram PVT PVTspectrum PSPectrogram	NORMal

Remarks

NORMal: indicates the normal view.
 SPECTrogram: indicates Spectrogram.
 DENSity: indicates Density.
 DSPectrogram: indicates Density and Density Spectrogram.
 PVT: indicates Power versus Time spectrum.
 PVTspectrum: indicates PVT Spectrum.
 PSPectrogram: indicates PVT Spectrogram.
 This command is only available for RTSA mode.

Return Format

The query returns NORM, SPEC, DENS, DSP, PVT, PVTS, or PSP.

Example

The following commands sets the current view to Spectrogram.

```
:DISPlay:VIEW:SElect SPECTrogram
```

The following query returns SPEC.

```
:DISPlay:VIEW:SElect?
```

:DISPlay:VIEW:SPECTrogram:AADJust**Syntax**

```
:DISPlay:VIEW:SPECTrogram:AADJust
```

Description

Auto adjusts the reference hue position and bottom hue position based on the highest amplitude value and the lowest amplitude value found in the spectrogram, respectively.

Remarks

The reference hue position is set to the highest amplitude value, and the bottom hue position to the lowest amplitude value.

This command is only available for Spectrogram in RTSA mode or the view that contains the spectrogram.

:DISPlay:VIEW:SPECTrogram:BOTTOM**Syntax**

```
:DISPlay:VIEW:SPECTrogram:BOTTOM <integer>
```

```
:DISPlay:VIEW:SPECTrogram:BOTTOM?
```

Description

Sets the bottom hue position displayed in the graticule.

Queries the bottom hue position displayed in the graticule.

Parameter

Name	Type	Range	Default
<integer>	Integer	0 to min (90%, with the reference position value -10%)	0

Remarks

Any amplitudes lower than the bottom hue position are displayed as black.

This command is only available for Spectrogram in RTSA mode or the view that contains the spectrogram.

Return Format

Queries the bottom hue position displayed in the graticule in integer.

Example

The following command sets the bottom hue position displayed in the graticule to 40.

```
:DISPlay:VIEW:SPECTrogram:BOTTOM 40
```

The following query returns 40.

```
:DISPlay:VIEW:SPECTrogram:BOTTOM?
```

:DISPlay:VIEW:SPECTrogram:HUE

Syntax

```
:DISPlay:VIEW:SPECTrogram:HUE <real>
:DISPlay:VIEW:SPECTrogram:HUE?
```

Description

Sets the reference hue.

Queries the reference hue.

Parameter

Name	Type	Range	Default
<real>	Consecutive Real Number	0 to 359.9	0

Remarks

The reference hue indicates the hue value at the top of the color bar in the spectrogram.

This command is only available for Spectrogram in RTSA mode or the view that contains the spectrogram.

Return Format

The query returns the reference hue value in scientific notation.

Example

The following command sets the reference hue value to 120.

```
:DISPlay:VIEW:SPECTrogram:HUE 120
```

The following query returns 1.200000e+02.

```
:DISPlay:VIEW:SPECTrogram:HUE?
```

:DISPlay:VIEW:SPECTrogram:POSition

Syntax

```
:DISPlay:VIEW:SPECTrogram:POSition <integer>
:DISPlay:VIEW:SPECTrogram:POSition?
```

Description

Sets the trace to be displayed in the spectrogram.

Queries the trace to be displayed in the spectrogram.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 8,192 (RTSA)	1

Remarks

This command is only available for Spectrogram in RTSA mode or the view that contains the spectrogram. In the trace window displayed in the spectrogram mode, you can determine the trace either by the trace number or the trace time. Trace 1 indicates the latest trace. If you select the trace by trace time, the trace that is closest to the set time will be selected.

Return Format

The query returns the displayed trace number in integer.

Example

The following command sets the displayed trace number to 146.

```
:DISPlay:VIEW:SPECTrogram:POSition 146
```

The following query returns 146.
:DISPlay:VIEW:SPECTrogram:POSition?

:DISPlay:VIEW:SPECTrogram:REFerence

Syntax

:DISPlay:VIEW:SPECTrogram:REFerence <integer>
:DISPlay:VIEW:SPECTrogram:REFerence?

Description

Sets the position of the reference hue displayed in the graticule.
Queries the position of the reference hue displayed in the graticule.

Parameter

Name	Type	Range	Default
<integer>	Integer	Max (10%, bottom hue value +10%) to 100	100

Remarks

This command is only available for Spectrogram in RTSA mode or the view that contains the spectrogram.

Return Format

Queries the reference hue position displayed in the graticule in integer.

Example

The following command sets the reference hue position displayed in the graticule to 60.
:DISPlay:VIEW:SPECTrogram:REFerence 60

The following query returns 60.
:DISPlay:VIEW:SPECTrogram:REFerence?

:DISPlay:VIEW:SPECTrogram:TRACe:COUPle

Syntax

:DISPlay:VIEW:SPECTrogram:TRACe:COUPle ON|OFF|1|0
:DISPlay:VIEW:SPECTrogram:TRACe:COUPle?

Description

Enables or disables coupling the marker to the trace.
Queries whether the marker is coupled to the trace.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

When you select "Off", the command allows you to fix the current marker to the displayed trace that is active when the marker is turned on.
When you select "On", the marker will stay on the selected trace and change with the trace.
This command is only available for Spectrogram in RTSA mode or the view that contains the spectrogram.

Return Format

The query returns 0 or 1.

Example

The following command enables coupling the marker to the trace.

:DISPlay:VIEW:SPECTrogram:TRACe:COUPle ON or :DISPlay:VIEW:SPECTrogram:TRACe:COUPle 1

The following query returns 1.

:DISPlay:VIEW:SPECTrogram:TRACe:COUPle?

:DISPlay:VIEW:SPECTrogram:TRACe:SElection**Syntax**

:DISPlay:VIEW:SPECTrogram:TRACe:SElection TIME|TNUMber

:DISPlay:VIEW:SPECTrogram:TRACe:SElection?

Description

Sets the selection method for the displayed trace.

Queries the selection method for the displayed trace.

Parameter

Name	Type	Range	Default
—	Keyword	TIME TNUMber	TNUMber

Remarks

TIME: indicates the trace time.

TNUMber: indicates the trace number.

Each trace is associated with a time value that represents the acquisition time. The formula is as follows:

Trace Time = Trace Number x Acquisition Time.

This command is only available for Spectrogram in RTSA mode or the view that contains the spectrogram.

Return Format

The query returns TIME or TNUM.

Example

The following command sets the selection method for the displayed trace to Time.

:DISPlay:VIEW:SPECTrogram:TRACe:SElection TIME

The following query returns TIME.

:DISPlay:VIEW:SPECTrogram:TRACe:SElection?

:DISPlay:WINDow:SElect

Syntax

:DISPlay:WINDow:SElect SPECTrum|PVT
:DISPlay:WINDow:SElect?

Description

Selects a window in the current view.
Queries the currently selected window type.

Parameter

Name	Type	Range	Default
—	Keyword	SPECTrum PVT	—

Remarks

This command is only available for Density Spectrogram, PVT Spectrum, or PVT Spectrogram in RTSA mode.

Return Format

The query returns SPEC or PVT.

Example

The following command selects the PVT window in the PVT Spectrum view.
:DISPlay:WINDow:SElect PVT

The following query returns PVT.
:DISPlay:WINDow:SElect?

:DISPlay:WINDow:TRACe:Y:DLINE

Syntax

:DISPlay:WINDow:TRACe:Y:DLINE <ampl>
:DISPlay:WINDow:TRACe:Y:DLINE?

Description

Sets the position of the display line. Its default unit is dBm.
Queries the position of the display line.

Parameter

Name	Type	Range	Default
<ampl>	Consecutive Real Number	Current amplitude range	-25 dBm

Remarks

By default, the display line is disabled. When the display line is enabled for the first time, its position is -25 dBm.

Return Format

The query returns the position of the display line in scientific notation.

Example

The following command sets the position of the display line to -10 dBm.
:DISPlay:WINDow:TRACe:Y:DLINE -10

The following query returns -1.000000e+01.
:DISPlay:WINDow:TRACe:Y:DLINE?

:DISPlay:WINDow:TRACe:Y:DLINe:STATe

Syntax

:DISPlay:WINDow:TRACe:Y:DLINe:STATe OFF|ON|0|1
:DISPlay:WINDow:TRACe:Y:DLINe:STATe?

Description

Turns on or off the display line.

Queries the status of the display line.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command enables the display line.

:DISPlay:WINDow:TRACe:Y:DLINe:STATe ON or :DISPlay:WINDow:TRACe:Y:DLINe:STATe 1

The following query returns 1.

:DISPlay:WINDow:TRACe:Y:DLINe:STATe?

:DISPlay:WINDow:TRACe:Y[:SCALE]:NRLevel

Syntax

:DISPlay:WINDow:TRACe:Y[:SCALE]:NRLevel <rel_ampl>
:DISPlay:WINDow:TRACe:Y[:SCALE]:NRLevel?

Description

Sets the reference level of normalization.

Queries the reference level of normalization.

Parameter

Name	Type	Range	Default
<rel_ampl>	Consecutive Real Number	-200 dB to 200 dB	10 dB

Remarks

This command is only available for RSA3030E-TG/RSA3015E-TG working in GPSA mode.

This command is only valid when the tracking generator function is enabled.

Return Format

The query returns the reference level of normalization in scientific notation.

Example

The following command sets the reference level of normalization to -20 dB.

:DISPlay:WINDow:TRACe:Y:SCALE:NRLevel -20

The following query returns -2.000000e+01.

:DISPlay:WINDow:TRACe:Y:SCALE:NRLevel?

:DISPlay:WINDow:TRACe:Y[:SCALe]:NRPosition**Syntax**

:DISPlay:WINDow:TRACe:Y[:SCALe]:NRPosition <integer>
:DISPlay:WINDow:TRACe:Y[:SCALe]:NRPosition?

Description

Sets the reference position of normalization.
Queries the reference position of normalization.

Parameter

Name	Type	Range	Default
<integer>	Integer	0% to 100%	100%

Remarks

This command is only available for RSA3030E-TG/RSA3015E-TG working in GPSA mode.
This command is only valid when the tracking generator function is enabled.

Return Format

The query returns the reference position of normalization in integer.

Example

The following command sets the reference position of normalization to 50%.
:DISPlay:WINDow:TRACe:Y:SCALe:NRPosition 50

The following query returns 50.
:DISPlay:WINDow:TRACe:Y:SCALe:NRPosition?

:DISPlay:WINDow:TRACe:Y[:SCALe]:PDIVision**Syntax**

:DISPlay:WINDow:TRACe:Y[:SCALe]:PDIVision <rel_ampl>
:DISPlay:WINDow:TRACe:Y[:SCALe]:PDIVision?

Description

Sets the Y-axis scale type.
Queries the Y-axis scale type.

Parameter

Name	Type	Range	Default
<rel_ampl>	Consecutive Real Number	0.1 dB to 20 dB	10 dB

Return Format

The query returns the Y-axis scale value in scientific notation.

Example

The following command sets the Y-axis scale value to 15 dB.
:DISPlay:WINDow:TRACe:Y:SCALe:PDIVision 15

The following query returns 1.500000e+01.
:DISPlay:WINDow:TRACe:Y:SCALe:PDIVision?

:DISPlay:WINDow:TRACe:Y[:SCALe]:RLEVel**Syntax**

:DISPlay:WINDow:TRACe:Y[:SCALe]:RLEVel <ampl>
 :DISPlay:WINDow:TRACe:Y[:SCALe]:RLEVel?

Description

Sets the reference level.
 Queries the reference level.

Parameter

Name	Type	Range	Default
<ampl>	Consecutive Real Number	-170 dBm to 30 dBm	0 dBm

Return Format

The query returns the reference level in scientific notation.

Example

The following command sets the reference level to -10 dB.
 :DISPlay:WINDow:TRACe:Y:SCALe:RLEVel -10

The following query returns -1.000000e+01.
 :DISPlay:WINDow:TRACe:Y:SCALe:RLEVel?

:DISPlay:WINDow:TRACe:Y[:SCALe]:RLEVel:OFFSet**Syntax**

:DISPlay:WINDow:TRACe:Y[:SCALe]:RLEVel:OFFSet <rel_ampl>
 :DISPlay:WINDow:TRACe:Y[:SCALe]:RLEVel:OFFSet?

Description

Sets the reference level offset.
 Queries the reference level offset.

Parameter

Name	Type	Range	Default
<rel_ampl>	Consecutive Real Number	-300 dB to 300 dB	0 dB

Remarks

The offset of the reference level only modifies the reference level and amplitude readout of the marker, but does not change the position of the curve.

Return Format

The query returns the offset of the reference level in scientific notation.

Example

The following command sets the reference level offset to 10 dB.
 :DISPlay:WINDow:TRACe:Y:SCALe:RLEVel:OFFSet 10

The following query returns 1.000000e+01.
 :DISPlay:WINDow:TRACe:Y:SCALe:RLEVel:OFFSet?

:DISPlay:WINDow:TRACe:Y[:SCALe]:SPACing**Syntax**

:DISPlay:WINDow:TRACe:Y[:SCALe]:SPACing LINear|LOGarithmic

:DISPlay:WINDow:TRACe:Y[:SCALe]:SPACing?

Description

Sets the Y-axis scale type.

Queries the Y-axis scale type.

Parameter

Name	Type	Range	Default
—	Keyword	LINear LOGarithmic	LOGarithmic

Remarks

LINear: indicates linear.

LOGarithmic: indicates log.

Return Format

The query returns LIN or LOG.

Example

The following command sets the Y-axis scale type to LOG.

:DISPlay:WINDow:TRACe:Y:SCALe:SPACing LOGarithmic

The following query returns LOG.

:DISPlay:WINDow:TRACe:Y:SCALe:SPACing?

:FETCh Commands

Command List:

- ◆ [:FETCh:ACPower?](#)
- ◆ [:FETCh:ACPower:LOWer?](#)
- ◆ [:FETCh:ACPower:MAIN?](#)
- ◆ [:FETCh:ACPower:UPPer?](#)
- ◆ [:FETCh:CNRatio?](#)
- ◆ [:FETCh:CNRatio:CARRier?](#)
- ◆ [:FETCh:CNRatio:CNRatio?](#)
- ◆ [:FETCh:CNRatio:NOISe?](#)
- ◆ [:FETCh:EBWidth?](#)
- ◆ [:FETCh:HARMonics:AMPLitude:ALL?](#)
- ◆ [:FETCh:HARMonics:AMPLitude? <n>](#)
- ◆ [:FETCh:HARMonics\[:DISTortion\]?](#)
- ◆ [:FETCh:HARMonics:FREQuency:ALL?](#)
- ◆ [:FETCh:HARMonics:FREQuency? <n>](#)
- ◆ [:FETCh:HARMonics:FUNDamental?](#)
- ◆ [:FETCh:OBWidth?](#)
- ◆ [:FETCh:OBWidth:OBWidth?](#)
- ◆ [:FETCh:OBWidth:OBWidth:FERRor?](#)
- ◆ [:FETCh:SANalyzer<n>?](#)
- ◆ [:FETCh:TOIntercept?](#)
- ◆ [:FETCh:TOIntercept:IP3?](#)
- ◆ [:FETCh:TPOWer?](#)

Remarks:

The :FETCh commands are only available for the RSA3000E series that has been installed with advanced measurement kit (AMK) option.

:FETCh:ACPower?

Syntax

:FETCh:ACPower?

Description

Queries the results of adjacent channel power measurement.

Remarks

This command is only valid when the adjacent channel power measurement in GPSA mode is enabled.

The power unit of the return value is consistent with the current Y-axis unit.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

Return Format

The query returns 5 values (main channel power, upper channel power, the power difference between the upper channel and the main channel (in dBc), the lower channel power, the power difference between the lower channel and the main channel (in dBc)) in scientific notation, and the values are separated by commas.

Example

The following query returns -5.150423000e+01,-5.173441000e+01,-2.301865000e-01,-5.142665000e+01,7.757568000e-02.

:FETCh:ACPower?

:FETCh:ACPower:LOWer?

Syntax

:FETCh:ACPower:LOWer?

Description

Queries the lower channel power of the adjacent channel power measurement.

Remarks

This command is only valid when the adjacent channel power measurement in GPSA mode is enabled.

The power unit of the return value is consistent with the current Y-axis unit.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

Return Format

The query returns the lower channel power in scientific notation.

Example

The following query returns -5.142665000e+01.

:FETCh:ACPower:LOWer?

:FETCh:ACPower:MAIN?

Syntax

:FETCh:ACPower:MAIN?

Description

Queries the main channel power of the adjacent channel power measurement.

Remarks

This command is only valid when the adjacent channel power measurement in GPSA mode is enabled. The power unit of the return value is consistent with the current Y-axis unit. This command will select data from the latest measurement results, and then transmit the data to the output buffer.

Return Format

The query returns the main channel power in scientific notation.

Example

The following query returns -5.150423000e+01.
:FETCh:ACPower:MAIN?

:FETCh:ACPower:UPPer?

Syntax

:FETCh:ACPower:UPPer?

Description

Queries the upper channel power of the adjacent channel power measurement.

Remarks

This command is only valid when the adjacent channel power measurement in GPSA mode is enabled. The power unit of the return value is consistent with the current Y-axis unit. This command will select data from the latest measurement results, and then transmit the data to the output buffer.

Return Format

The query returns the upper channel power in scientific notation.

Example

The following query returns -5.173441000e+01.
:FETCh:ACPower:UPPer?

:FETCh:CNRatio?

Syntax

:FETCh:CNRatio?

Description

Queries the results of C/N ratio measurement.

Remarks

This command is only valid when the C/N ratio measurement in GPSA mode is enabled.

The power unit of the return value is consistent with the current Y-axis unit.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

Return Format

The query returns the carrier power, noise power, and C/N ratio (in dB) in scientific notation. They are separated by commas.

Example

The following query returns -6.048788000e+01,-6.186192000e+01,1.374039000e+00.

:FETCh:CNRatio?

:FETCh:CNRatio:CARRier?

Syntax

:FETCh:CNRatio:CARRier?

Description

Queries the carrier power.

Remarks

This command is only valid when the C/N ratio measurement in GPSA mode is enabled.

The power unit of the return value is consistent with the current Y-axis unit.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

Return Format

The query returns the carrier power in scientific notation.

Example

The following query returns -1.484203000e+01.

:FETCh:CNRatio:CARRier?

:FETCh:CNRatio:CNRatio?

Syntax

:FETCh:CNRatio:CNRatio?

Description

Queries the results of C/N ratio measurement.

Remarks

This command is only valid when the C/N ratio measurement in GPSA mode is enabled.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

Return Format

The query returns the C/N ratio in scientific notation.

Example

The following query returns 8.956909000e-02.

:FETCh:CNRatio:CNRatio?

:FETCh:CNRatio:NOISe?

Syntax

:FETCh:CNRatio:NOISe?

Description

Queries the noise power.

Remarks

This command is only valid when the C/N ratio measurement in GPSA mode is enabled.

The power unit of the return value is consistent with the current Y-axis unit.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

Return Format

The query returns the noise power in scientific notation.

Example

The following query returns -1.442294000e+01.

:FETCh:CNRatio:NOISe?

:FETCh:EBWidth?

Syntax

:FETCh:EBWidth?

Description

Queries the result of the emission bandwidth measurement.

Remarks

This command is only valid when the emission bandwidth measurement in GPSA mode is enabled.
This command will select data from the latest measurement results, and then transmit the data to the output buffer.

Return Format

The query returns the emission bandwidth in integer, and its unit is Hz.

Example

The following query returns 5.000000000e+04.
:FETCh:EBWidth?

:FETCh:HARMonics:AMPLitude:ALL?

Syntax

:FETCh:HARMonics:AMPLitude:ALL?

Description

Queries the amplitudes of the first 10 harmonics. The first harmonic is the fundamental waveform.

Remarks

This command is only valid when the harmonic distortion measurement in GPSA mode is enabled.
The amplitude unit of the return value is consistent with the current Y-axis unit.
This command will select data from the latest measurement results, and then transmit the data to the output buffer.

Return Format

The query returns the amplitudes of the first 10 harmonics in scientific notation (separated by commas).
If the number of harmonics under measurement is less than 10, the harmonics that are not measured do not have return values.

Example

The following query returns -1.692102000e+01,-6.458423000e+01,-7.509421000e+01,-
7.924328000e+01,-7.847027000e+01,-7.885457000e+01,-7.882358000e+01,-7.921457000e+01,-
7.923057000e+01,-7.915358000e+01.
:FETCh:HARMonics:AMPLitude:ALL?

:FETCh:HARMonics:AMPLitude? <n>

Syntax

:FETCh:HARMonics:AMPLitude? <n>

Description

Queries the amplitude of the specified harmonic.

Parameter

Name	Type	Range	Default
<n>	Integer	1 to 10	—

Remarks

This command is only valid when the harmonic distortion measurement in GPSA mode is enabled.

The amplitude unit of the return value is consistent with the current Y-axis unit.

The query returns --- when the harmonic read does not have data.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

Return Format

The query returns the amplitude of the specified harmonic in scientific notation.

Example

The following query returns -1.692102000e+01.

:FETCh:HARMonics:AMPLitude? 1

:FETCh:HARMonics[:DISTortion]?

Syntax

:FETCh:HARMonics[:DISTortion]?

Description

Queries the percentage of the total harmonic distortion.

Remarks

This command is only valid when the harmonic distortion measurement in GPSA mode is enabled.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

Return Format

The query returns the percentage of the total harmonic distortion in scientific notation.

Example

The following query returns 1.510000000e-02.

:FETCh:HARMonics:DISTortion?

:FETCh:HARMonics:FREQuency:ALL?

Syntax

:FETCh:HARMonics:FREQuency:ALL?

Description

Queries the frequencies of the first 10 harmonics. The first harmonic is the fundamental waveform.

Remarks

This command is only valid when the harmonic distortion measurement in GPSA mode is enabled.
This command will select data from the latest measurement results, and then transmit the data to the output buffer.

Return Format

The query returns the frequencies of the first 10 harmonics in scientific notation (separated by commas). The unit is Hz.

If the number of harmonics under measurement is less than 10, the harmonics that are not measured do not have return values.

Example

The following query returns

4.550000000e+07,9.100000000e+07,1.365000000e+08,1.820000000e+08,2.275000000e+08,2.73000000e+08,3.185000000e+08,3.640000000e+08,4.095000000e+08,4.550000000e+08.

:FETCh:HARMonics:FREQuency:ALL?

:FETCh:HARMonics:FREQuency? <n>

Syntax

:FETCh:HARMonics:FREQuency? <n>

Description

Queries the frequency of the specified harmonic.

Parameter

Name	Type	Range	Default
<n>	Integer	1 to 10	—

Remarks

This command is only valid when the harmonic distortion measurement in GPSA mode is enabled.
The query returns --- when the harmonic read does not have data.
This command will select data from the latest measurement results, and then transmit the data to the output buffer.

Return Format

The query returns the frequency of the specified harmonic in scientific notation. The unit is Hz.

Example

The following query returns 4.550000000e+07.

:FETCh:HARMonics:FREQuency? 1

:FETCh:HARMonics:FUNDamental?

Syntax

:FETCh:HARMonics:FUNDamental?

Description

Queries the frequency of the fundamental waveform.

Remarks

This command is only valid when the harmonic distortion measurement in GPSA mode is enabled.

This command has the same function as [:FETCh:HARMonics:FREQuency? 1](#).

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

Return Format

The query returns the frequency of the fundamental waveform in scientific notation. The unit is Hz.

Example

The following query returns 4.550000000e+07.

:FETCh:HARMonics:FUNDamental?

:FETCh:OBWidth?

Syntax

:FETCh:OBWidth?

Description

Queries the results of the occupied bandwidth measurement.

Remarks

This command is only valid when the occupied bandwidth measurement in GPSA mode is enabled.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

Return Format

The query returns the occupied bandwidth (Hz) and the transmit frequency error (Hz) in scientific notation. They are separated by commas.

Example

The following query returns 1.860000000e+06,2.000000000e+04.

:FETCh:OBWidth?

:FETCh:OBWidth:OBWidth?

Syntax

:FETCh:OBWidth:OBWidth?

Description

Queries the occupied bandwidth.

Remarks

This command is only valid when the occupied bandwidth measurement in GPSA mode is enabled. This command will select data from the latest measurement results, and then transmit the data to the output buffer.

Return Format

The query returns the occupied bandwidth in scientific notation. Its unit is Hz.

Example

The following query returns 1.860000000e+06.
:FETCh:OBWidth:OBWidth?

:FETCh:OBWidth:OBWidth:FERRor?

Syntax

:FETCh:OBWidth:OBWidth:FERRor?

Description

Queries the transmit frequency error.

Remarks

This command is only valid when the occupied bandwidth measurement in GPSA mode is enabled. This command will select data from the latest measurement results, and then transmit the data to the output buffer.

Return Format

The query returns the transmit frequency error in scientific notation. The unit is Hz.

Example

The following query returns 2.000000000e+04.
:FETCh:OBWidth:OBWidth:FERRor?

:FETCh:SANalyzer<n>?

Syntax

:FETCh:SANalyzer<n>?

Description

Queries the measurement results or trace data in the cache area.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	—

Remarks

This command is only valid in GPSA mode.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

Return Format

The query returns the measurement data of Trace n in scientific notation. The measurement data are returned in x,y pairs, separated by commas. The unit is Hz.

Example

The following query returns 0,0,0,0,-1.000000000e+02,0,801,0,0,0,-3.19e+01,0.00e+00,0.00e+00,0.00e+00,0.00e+00,0.00e+00,0.00e+00,0.00e+00.
:FETCh:SANalyzer1?

:FETCh:TOIntercept?

Syntax

:FETCh:TOIntercept?

Description

Queries the results of TOI measurement.

Remarks

This command is only valid when the TOI measurement in GPSA mode is enabled.

The amplitude unit of the return value is consistent with the current Y-axis unit.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

Return Format

The query returns the measurement results of TOI in the following format:

Base Lower frequency (Hz), amplitude, Base Upper frequency (Hz), amplitude, 3rd Order Lower frequency (Hz), amplitude, intercept, 3rd Order Upper frequency (Hz), amplitude, intercept.

Example

The following query returns 1.500450000e+09,-8.131735000e+01,1.500450000e+09,-8.131735000e+01,1.500450000e+09,-8.131735000e+01,-8.131735000e+01,1.500450000e+09,-8.131735000e+01,-8.131735000e+01.
:FETCh:TOIntercept?

:FETCh:TOIntercept:IP3?

Syntax

:FETCh:TOIntercept:IP3?

Description

The query returns the minor value of the intercepts of the Third Order Lower and Third Order Upper.

Remarks

This command is only valid when the TOI measurement in GPSA mode is enabled.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

Return Format

The query returns the minor one in scientific notation.

Example

The following query returns -8.131735000e+01.

:FETCh:TOIntercept:IP3?

:FETCh:TPOWer?

Syntax

:FETCh:TPOWer?

Description

Queries the result of T-power measurement.

Remarks

This command is only valid when the T-power measurement in GPSA mode is enabled.

The power unit of the return value is consistent with the current Y-axis unit.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

Return Format

The query returns the T-power measurement result in scientific notation.

Example

The following query returns -1.658941000e+01.

:FETCh:TPOWer?

:FORMat Commands

Command List:

- ◆ [:FORMat:BORDER](#)
- ◆ [:FORMat\[:TRACe\]\[:DATA\]](#)

:FORMat:BORDER

Syntax

:FORMat:BORDER NORMal|SWAPped

:FORMat:BORDER?

Description

Selects the binary data byte order for data transmission.

Queries the binary data byte order for data transmission.

Parameter

Name	Type	Range	Default
—	Keyword	NORMal SWAPped	NORMal

Remarks

NORMal: indicates that the byte sequence begins with the most significant byte (MSB) and ends with the least significant byte (LSB).

SWAPped: indicates that the byte sequence begins with the least significant byte (LSB) and ends with the most significant byte (MSB).

Return Format

The query returns NORM or SWAP.

Example

The following command queries the binary data byte order for data transmission to NORMal.

:FORMat:BORDER NORMal

The following query returns NORM.

:FORMat:BORDER?

:FORMat[:TRACe][:DATA]

Syntax

:FORMat[:TRACe][:DATA] ASCii|INTEger,32|REAL,32|REAL,64
:FORMat[:TRACe][:DATA]?

Description

Sets the input/output format of the trace data.

Queries the input/output format of the trace data.

Parameter

Name	Type	Range	Default
—	Keyword	ASCii INTEger,32 REAL,32 REAL,64	ASCii

Remarks

ASCii: ASCII characters, separated by commas.

INTEger,32: binary 32-bit integer values.

REAL,32: binary 32-bit real values.

REAL,64: binary 64-bit real values.

Return Format

The query returns ASC,8, INT,32, REAL,32, or REAL,64.

Example

The following command sets the input/output format of the trace data to REAL,32.

:FORMat:TRACe:DATA REAL,32

The following query returns REAL,32.

:FORMat:TRACe:DATA?

IEEE 488.2 Common Commands

IEEE 488.2 common commands are used to operate or query the status registers. For the structure of the status register, refer to "[:STATus Commands](#)".

Command List:

- ◆ [*CLS](#)
- ◆ [*ESE](#)
- ◆ [*ESR?](#)
- ◆ [*IDN?](#)
- ◆ [*OPC](#)
- ◆ [*RCL](#)
- ◆ [*RST](#)
- ◆ [*SAV](#)
- ◆ [*SRE](#)
- ◆ [*STB?](#)
- ◆ [*TRG](#)
- ◆ [*TST?](#)
- ◆ [*WAI](#)

*CLS

Syntax

*CLS

Description

Clears all the event registers and status byte registers.

*ESE

Syntax

*ESE <value>

*ESE?

Description

Sets the enable register for the standard event status register.

Queries the enable register for the standard event status register.

Parameter

Name	Type	Range	Default
<value>	Integer	Refer to " Remarks "	0

Remarks

Bit 2, bit 3, bit 4, and bit 7 are reserved; you can set their values but they will not affect the system. Bit 1 and bit 6 are not used and are always treated as 0; therefore, the range of <value> are the decimal numbers corresponding to the binary numbers ranging from 00000000 (0 in decimal) to 11111111 (255 in decimal) and of which bit 1 and bit 6 are 0.

Return Format

The query returns an integer. The integer equals to the binary-weighted sum of all the bits set in the register. For example, the query returns 144 if bit 4 (16 in decimal) and bit 7 (128 in decimal) are enabled.

Example

The following command sets the enable register for the standard event status register to 16.

*ESE 16

The following query returns 16.

*ESE?

***ESR?**

Syntax

*ESR?

Description

Queries and clears the event register for the standard event status register.

Remarks

Bit 1 and bit 6 in the standard event status register are not in use, and are regarded as 0. The query returns a decimal value that corresponds to the binary values ranging from 00000000 (0 in decimal) to 11111111 (255 in decimal) and of which bit 1 and bit 6 are 0.

Return Format

The query returns an integer. The integer equals to the binary-weighted sum of all the bits set in the register. For example, the query returns 144 if bit 4 (16 in decimal) and bit 7 (128 in decimal) are enabled.

Example

The following query returns 24 (bit 3 and bit 4 have been set).

*ESR?

***IDN?**

Syntax

*IDN?

Description

Queries the ID string of the instrument.

Return Format

The query returns the ID string in the following format:

Rigol Technologies,<model>,<serial number>,XX.XX.XX

<model>: instrument model

<serial number>: serial number of the instrument

XX.XX.XX: software version of the instrument

Example

The following query returns Rigol Technologies,RSA3030E,RSA3A200100001,00.01.00.

*IDN?

*OPC

Syntax

*OPC

*OPC?

Description

Sets bit 0 (Operation Complete, OPC) in the standard event status register to 1 after the current operation is finished.

Queries whether the current operation is finished.

Return Format

The query returns 1 after the current operation is finished; otherwise, the query returns 0.

*RCL

Syntax

*RCL <integer>

Description

Recalls the selected register.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 16	—

Example

The following command recalls Register 1.

*RCL 1

*RST

Syntax

*RST

Description

Restores the instrument to its factory default settings.

SAV*Syntax**

*SAV <integer>

Description

Saves the current instrument state to the selected register.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 16	—

Example

The following command saves the current instrument state to Register 1.

*SAV 1

SRE*Syntax**

*SRE <value>

*SRE?

Description

Sets the enable register for the status byte register.

Queries the enable register for the status byte register.

Parameter

Name	Type	Range	Default
<value>	Integer	Refer to "Remarks"	0

Remarks

Bit 0 and Bit 1 are not used and are always treated as 0; therefore, the range of <value> are the decimal numbers corresponding to the binary numbers ranging from 00000000 (0 in decimal) to 11111111 (255 in decimal) and of which Bit 0 and Bit 1 are 0.

Return Format

The query returns an integer. The integer equals to the binary-weighted sum of all the bits set in the register. For example, the query returns 144 if Bit 4 (16 in decimal) and Bit 7 (128 in decimal) are enabled.

Example

The following command sets the enable register for the status byte register to 16.

*SRE 16

The following query returns 16.

*SRE?

***STB?**

Syntax

*STB?

Description

Queries the event register for the status byte register.

Remarks

Bit 0 and Bit 1 in the status byte register are not in use, and are regarded as 0. The query returns a decimal value that corresponds to the binary values ranging from 00000000 (0 in decimal) to 11111111 (255 in decimal) and of which Bit 0 and Bit 1 are 0.

Return Format

The query returns an integer. The integer equals to the binary-weighted sum of all the bits set in the register. For example, the query returns 144 if bit 4 (16 in decimal) and bit 7 (128 in decimal) are enabled.

Example

The following query returns 24 (bit 3 and bit 4 have been set).

*STB?

***TRG**

Syntax

*TRG

Description

Triggers a sweep or measurement immediately.

***TST?**

Syntax

*TST?

Description

Queries whether the self-check operation is finished.

Remarks

The query returns 0 or 1. A zero is returned if the test is successful, 1 if it fails.

***WAI**

Syntax

*WAI

Description

Wait for the operation to finish.

:INITiate Commands

Command List:

- ◆ [:INITiate:CONTInuous](#)
- ◆ [:INITiate\[:IMMediate\]](#)

Remarks:

The commands with * are only available for the RSA3000 series that has been installed with advanced measurement kit option.

:INITiate:CONTInuous

Syntax

```
:INITiate:CONTInuous OFF|ON|0|1
:INITiate:CONTInuous?
```

Description

Selects continuous (ON|1) or single (OFF|0) measurement mode.
Queries the current measurement mode.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command sets the instrument to sweep continuously.
:INITiate:CONTInuous ON or :INITiate:CONTInuous 1

The following query returns 1.
:INITiate:CONTInuous?

:INITiate[:IMMediate]

Syntax

```
:INITiate[:IMMediate]
```

Description

In non-measurement state, initialize a sweep.
In measurement state, trigger a measurement.

Explanation

Use the :FETCh? command to transmit a measurement result from the internal memory to the output buffer.

:INSTrument Commands

Command List:

- ◆ [:INSTrument:COUPle:FREQuency:CENTer](#)
- ◆ [:INSTrument:DEFault](#)
- ◆ [:INSTrument:NSElect](#)
- ◆ [:INSTrument\[:SElect\]](#)

:INSTrument:COUPle:FREQuency:CENTer

Syntax

:INSTrument:COUPle:FREQuency:CENTer ALL|NONE
:INSTrument:COUPle:FREQuency:CENTer?

Description

Turns on or off the global center frequency of the instrument.
Queries the setting status of the global center frequency of the instrument.

Parameter

Name	Type	Range	Default
—	Keyword	ALL NONE	NONE

Remarks

NONE: turns off the global center frequency.

ALL: turns on the global center frequency.

If you execute this command in any mode, the center frequency of the current mode is set to the global center frequency. Adjusting the center frequency in a mode, while the global center frequency is on, will modify the global center frequency.

Return Format

The query returns ALL or NONE.

Example

The following command enables the global center frequency of the instrument.

:INSTrument:COUPle:FREQuency:CENTer ALL

The following query returns ALL.

:INSTrument:COUPle:FREQuency:CENTer?

:INSTrument:DEFault

Syntax

:INSTrument:DEFault

Description

Resets the parameters of the current mode to the factory default settings.

:INSTRument:NSElect **:INSTRument[:SElect]**

Syntax

```
:INSTRument:NSElect 1|2  
:INSTRument:NSElect?  
:INSTRument[:SElect] SA|RTSA  
:INSTRument[:SElect]?
```

Description

Selects the working mode of the instrument.
Queries the working mode of the instrument.

Parameter

Name	Type	Range	Default
—	Discrete	1 2	1
—	Keyword	SA RTSA	SA

Remarks

The above parameters 1|2 correspond to SA|RTSA, respectively.
After running the command of switching the working mode, we recommend you set the timeout value to 8 s first and then perform the follow-up operation. Or, you can perform the next step after a delay of 8 s.

Example

The following command sets the working mode of the instrument to GPSA.

```
:INSTRument:NSElect 1  
:INSTRument:SElect SA
```

The following query returns 1 or SA.

```
:INSTRument:NSElect?  
:INSTRument:SElect?
```

:MMEMory Commands

Command List:

- ◆ [:MMEMory:DELeTe](#)
- ◆ [:MMEMory:LOAD:CORRection](#)
- ◆ [:MMEMory:LOAD:FMT](#)
- ◆ [:MMEMory:LOAD:LIMit](#)
- ◆ [:MMEMory:LOAD:STATe](#)
- ◆ [:MMEMory:LOAD:TRACe](#)
- ◆ [:MMEMory:LOAD:TRACe:DATA](#)
- ◆ [:MMEMory:MOVE](#)
- ◆ [:MMEMory:STORe:CORRection](#)
- ◆ [:MMEMory:STORe:LIMit](#)
- ◆ [:MMEMory:STORe:MTABLe](#)
- ◆ [:MMEMory:STORe:PTABLe](#)
- ◆ [:MMEMory:STORe:RESults](#)
- ◆ [:MMEMory:STORe:SCReen](#)
- ◆ [:MMEMory:STORe:STATe](#)
- ◆ [:MMEMory:STORe:TRACe](#)
- ◆ [:MMEMory:STORe:TRACe:DATA](#)

Remarks:

The mode name in the following path contains "gpsa" and "rtsa" modes. The return path takes "gpsa" as an example.

:MMEMory:DELeTe

Syntax

:MMEMory:DELeTe <file_name>

Description

Deletes a specified file.

Parameter

Name	Type	Range	Default
<file_name>	ASCII String	—	—

Remarks

<file_name> should contain the path and the filename.
This operation fails if the specified file does not exist.

Example

The following command deletes the "state1.sta" file from the "/gpsa/state" folder.
:MMEMory:DELeTe /gpsa/state/state1.sta

:MMEMory:LOAD:CORRection

Syntax

:MMEMory:LOAD:CORRection 1|2|3|4,<file_name>

Description

Loads the data from the specified file (suffixed with .csv) to carry out amplitude correction.

Parameter

Name	Type	Range	Default
--	Discrete	1 2 3 4	--
<file_name>	ASCII String	--	--

Remarks

The parameter 1|2|3|4 corresponds to ANTenna|CABLe|OTHer|USER.
This operation fails if the file with the specified filename does not exist.
This command is only available for GPSA mode.

Example

The following command loads the amplitude correction file ANT.csv to the instrument.
:MMEMory:LOAD:CORRection 1,ANT.csv

:MMEMory:LOAD:FMT

Syntax

:MMEMory:LOAD:FMT <label>,<file_name>

Description

Loads the edited FMT file (.csv).

Parameter

Name	Type	Range	Default
<label>	Keyword	UPPer LOWer	----
<file_name>	ASCII String	----	----

Remarks

This operation fails if the specified file does not exist.
This command is only available for RTSA mode.

Example

The following command loads the FMT file (mask1.csv) to the upper mask.
:MMEMory:LOAD:FMT upper,mask1.csv

:MMEMory:LOAD:LIMit

Syntax

:MMEMory:LOAD:LIMit <label>,<file_name>

Description

Imports the edited limit line file (.csv).

Parameter

Name	Type	Range	Default
<label>	Keyword	LLINE1 LLINE2 LLINE3 LLINE4 LLINE5 LLINE6	—
<file_name>	ASCII String	—	—

Remarks

This operation fails if the specified file does not exist.

Example

The following command imports the limit line file (upp1.csv) to Limit1.

```
:MMEMory:LOAD:LIMit LLINE1,upp1.csv
```

:MMEMory:LOAD:STATE**Syntax**

```
:MMEMory:LOAD:STATe <file_name>
```

Description

Imports the specified state file (.sta).

Parameter

Name	Type	Range	Default
<file_name>	ASCII String	—	—

Remarks

This operation fails if the specified file does not exist.

Example

The following command imports the state file (state1.sta) to the instrument.

```
:MMEMory:LOAD:STATE state1.sta
```

:MMEMory:LOAD:TRACE**Syntax**

```
:MMEMory:LOAD:TRACe <label>,<file_name>
```

Description

Imports the specified trace file (.trs) and the current instrument state.

Parameter

Name	Type	Range	Default
<label>	Keyword	TRACE1 TRACE2 TRACE3 TRACE4 TRACE5 TRACE6	—
<file_name>	ASCII String	—	—

Remarks

This operation fails if the specified file does not exist.

Example

The following command imports the current instrument state and the trace file (t1.trs) to Trace2.

```
:MMEMory:LOAD:TRACe TRACE2,t1.trs
```

:MMEMory:LOAD:TRACe:DATA

Syntax

:MMEMory:LOAD:TRACe:DATA <label>,<file_name>

Description

Imports the specified measurement data file (.csv).

Parameter

Name	Type	Range	Default
<label>	Keyword	TRACE1 TRACE2 TRACE3 TRACE4 TRACE5 TRACE6	—
<file_name>	ASCII String	—	—

Remarks

This operation fails if the specified file does not exist.

Example

The following command imports the measurement data file (trace1.csv) to Trace1.

```
:MMEMory:LOAD:TRACe:DATA TRACE1,trace1.csv
```

:MMEMory:MOVE

Syntax

:MMEMory:MOVE <file_name1>,<file_name2>

Description

Renames the specified file <file_name1> as <file_name2>.

Parameter

Name	Type	Range	Default
<file_name1>	ASCII String	—	—
<file_name2>	ASCII String	—	—

Remarks

<file_name1> and <file_name2> should contain the path and the filename.

This operation fails if the file with the specified filename does not exist.

Example

The following command renames the state file (state1.sta) in the folder (/gpsa/state) as "state2.sta".

```
:MMEMory:MOVE /gpsa/state/state1.sta,/gpsa/state/state2.sta
```

:MMEMory:STORe:CORRection

Syntax

:MMEMory:STORe:CORRection 1|2|3|4,<file_name>

Description

Saves the amplitude correction data file to the default path ("/mode name"/correction) with a specified filename suffixed with ".csv" by default (you do not have to add the suffix manually).

Parameter

Name	Type	Range	Default
--	Discrete	1 2 3 4	--
<file_name>	ASCII String	--	--

Remarks

The parameter 1|2|3|4 corresponds to ANTenna|CABLe|OTHer|USER.

If the specified file already exists, overwrite it.

This command is only available for GPSA mode.

Example

The following command saves the amplitude correction data with the filename "ANT" to the folder (/gpsa/correction).

```
:MMEMory:STORe:CORRection 1,ANT
```

:MMEMory:STORe:LIMit**Syntax**

```
:MMEMory:STORe:LIMit <label>,<file_name>
```

Description

Saves the currently edited limit line with a specified filename suffixed with ".csv" by default (you do not have to add the suffix manually) to a default path ("/mode name"/limit).

Parameter

Name	Type	Range	Default
<label>	Keyword	LLINE1 LLINE2 LLINE3 LLINE4 LLINE5 LLINE6	---
<file_name>	ASCII String	---	---

Remarks

If the specified file already exists, overwrite it.

Example

The following command saves Limit1 with the filename "low" to the folder (/gpsa/limit).

```
:MMEMory:STORe:LIMit LLINE1,low
```

:MMEMory:STORe:MTABLE**Syntax**

```
:MMEMory:STORe:MTABLE <file_name>
```

Description

Saves the marker table with a specified filename suffixed with ".csv" by default (you do not have to add the suffix manually) to the default path ("/mode name"/measdata).

Parameter

Name	Type	Range	Default
<file_name>	ASCII String	---	---

Remarks

If the specified file already exists, overwrite it.

Example

The following command saves the marker table with the specified filename "MAK1" to the folder (/gpsa/measdata).

```
:MMEMory:STORe:MTABLE MAK1
```

:MMEMory:STORe:PTABLE**Syntax**

```
:MMEMory:STORe:PTABLE <file_name>
```

Description

Saves the peak table with a specified filename suffixed with ".csv" by default (you do not have to add the suffix manually) to the default path ("/mode name"/measdata).

Parameter

Name	Type	Range	Default
<file_name>	ASCII String	—	—

Remarks

If the specified file already exists, overwrite it.

Example

The following command saves the peak table with the specified filename "PT1" to the folder (/gpsa/measdata).

```
:MMEMory:STORe:PTABLE PT1
```

:MMEMory:STORe:RESults**Syntax**

```
:MMEMory:STORe:RESults <file_name>
```

Description

Saves the current measurement results with a specified filename suffixed with ".csv" by default (you do not have to add the suffix manually) to the default path ("/mode name"/measdata).

Parameter

Name	Type	Range	Default
<file_name>	ASCII String	—	—

Remarks

If the specified file already exists, overwrite it.

This command is only valid when the advanced measurement function in GPSA mode is enabled.

Example

The following command saves the current measurement results with the specified filename "data" to the folder (/gpsa/measdata).

```
:MMEMory:STORe:RESults data
```

:MMEMory:STORe:SCReen

Syntax

:MMEMory:STORe:SCReen <file_name>

Description

Saves the current screen image with the specified filename suffixed with ".jpg", ".png/", or ".bmp" to the default path ("/mode name"/screen).

Parameter

Name	Type	Range	Default
<file_name>	ASCII String	—	—

Remarks

If the specified file already exists, overwrite it.

If a suffix (.jpg/.png/.bmp) following the filename exists, you can save the current screen image with a different format based on its different suffix.

If no suffix is followed with the filename, then by default, the current screen image is saved in the currently selected format.

Example

The following command saves the current screen image with the filename "screen.jpg" to the folder (/gpsa/screen).

:MMEMory:STORe:SCReen screen.jpg

:MMEMory:STORe:STATe

Syntax

:MMEMory:STORe:STATe <file_name>

Description

Saves the current instrument state with the specified filename suffixed with ".sta" to the default path ("/mode name"/state).

Parameter

Name	Type	Range	Default
<file_name>	ASCII String	—	—

Remarks

If the specified file already exists, overwrite it.

Example

The following command saves the current instrument state with the filename "state.sta" to the folder (/gpsa/state).

:MMEMory:STORe:STATe state

:MMEMory:STORe:TRACe

Syntax

:MMEMory:STORe:TRACe <label>,<file_name>

Description

Saves the specified trace+state file with filename suffixed with ".trs" to the default path ("/mode name"/tracestate).

Parameter

Name	Type	Range	Default
<label>	Keyword	TRACE1 TRACE2 TRACE3 TRACE4 TRACE5 TRACE6	—
<file_name>	ASCII String	—	—

Remarks

If the specified file already exists, overwrite it.

Example

The following command saves the current instrument state and Trace 1 with the filename "mystate.trs" to the folder (/gpsa/tracestate).

```
:MMEMory:STORe:TRACe TRACE1,mystate
```

:MMEMory:STORe:TRACe:DATA

Syntax

:MMEMory:STORe:TRACe:DATA <label>,<file_name>

Description

Saves the trace measurement results with a specified filename suffixed with ".csv" to the default path ("/mode name"/measdata).

Parameter

Name	Type	Range	Default
<label>	Keyword	TRACE1 TRACE2 TRACE3 TRACE4 TRACE5 TRACE6	—
<file_name>	ASCII String	—	—

Remarks

If the specified file already exists, overwrite it.

Example

The following command saves Trace1 measurement data with the specified filename "mydata.csv" to the folder (/gpsa/measdata).

```
:MMEMory:STORe:TRACe:DATA TRACE1,mydata
```

:OUTPut Command

Command List:

◆ [:OUTPut\[:EXternal\]\[:STATe\]](#)

:OUTPut[:EXternal][:STATe]

Syntax

:OUTPut[:EXternal][:STATe] OFF|ON|0|1

:OUTPut[:EXternal][:STATe]?

Description

Enables or disables the output of the tracking generator.

Queries the on/off status of the tracking generator.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

This command is only available for RSA3030E-TG/RSA3015E-TG working in GPSA mode.

Return Format

The query returns 0 or 1.

Example

The following command enables the output of the tracking generator.

:OUTPut:EXternal:STATe ON or :OUTPut:EXternal:STATe 1

The following query returns 1.

:OUTPut:EXternal:STATe?

:READ Commands

Both the :READ and [:FETCh Commands](#) are used to acquire the measurement results. The difference is that the [:FETCh Commands](#) acquire the measurement results immediately, whereas the :READ commands start a measurement and return the measurement results after the measurement operation is finished.

Command List:

- ◆ [:READ:ACPower?](#)
- ◆ [:READ:ACPower:LOWer?](#)
- ◆ [:READ:ACPower:MAIN?](#)
- ◆ [:READ:ACPower:UPPer?](#)
- ◆ [:READ:CNRatio?](#)
- ◆ [:READ:CNRatio:CARRier?](#)
- ◆ [:READ:CNRatio:CNRatio?](#)
- ◆ [:READ:CNRatio:NOISe?](#)
- ◆ [:READ:EBWidth?](#)
- ◆ [:READ:HARMonics:AMPLitude:ALL?](#)
- ◆ [:READ:HARMonics:AMPLitude? <n>](#)
- ◆ [:READ:HARMonics\[:DISTortion\]?](#)
- ◆ [:READ:HARMonics:FREQuency:ALL?](#)
- ◆ [:READ:HARMonics:FREQuency? <n>](#)
- ◆ [:READ:HARMonics:FUNDamental?](#)
- ◆ [:READ:OBWidth?](#)
- ◆ [:READ:OBWidth:OBWidth?](#)
- ◆ [:READ:OBWidth:OBWidth:FERRor?](#)
- ◆ [:READ:SANalyzer<n>?](#)
- ◆ [:READ:TOIntercept?](#)
- ◆ [:READ:TOIntercept:IP3?](#)
- ◆ [:READ:TPOWer?](#)

Remarks:

The :READ commands are only available for the RSA3000E series that has been installed with advanced measurement kit (AMK) option.

:READ:ACPower?

Syntax

:READ:ACPower?

Description

Executes one adjacent channel power measurement and returns the measurement results.

Remarks

The power unit of the returned value is consistent with the current Y-axis unit.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

This command is only available for GPSA mode.

Return Format

The query returns 5 values (main channel power, upper channel power, the power difference between the upper channel and the main channel (in dBc), the lower channel power, the power difference between the lower channel and the main channel (in dBc)) in scientific notation, and the values are separated by commas. For example, -5.150423000e+01,-5.173441000e+01,-2.301865000e-01,-5.142665000e+01,7.757568000e-02

:READ:ACPower:LOWer?

Syntax

:READ:ACPower:LOWer?

Description

Executes one adjacent channel power measurement and returns the lower channel power.

Remarks

The power unit of the return value is consistent with the current Y-axis unit.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

This command is only available for GPSA mode.

Return Format

The query returns the lower channel power in scientific notation. For example, -5.142665000e+01

:READ:ACPower:MAIN?

Syntax

:READ:ACPower:MAIN?

Description

Executes one adjacent channel power measurement and returns the main channel power.

Remarks

The power unit of the return value is consistent with the current Y-axis unit.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

This command is only available for GPSA mode.

Return Format

The query returns the main channel power in scientific notation. For example, -5.150423000e+01

:READ:ACPower:UPPer?

Syntax

:READ:ACPower:UPPer?

Description

Executes one adjacent channel power measurement and returns the upper channel power.

Remarks

The power unit of the return value is consistent with the current Y-axis unit.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

This command is only available for GPSA mode.

Return Format

The query returns the upper channel power in scientific notation. For example, -5.173441000e+01

:READ:CNRatio?

Syntax

:READ:CNRatio?

Description

Executes one C/N ratio measurement and returns the measurement results.

Remarks

The power unit of the return value is consistent with the current Y-axis unit.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

This command is only available for GPSA mode.

Return Format

The query returns the carrier power, noise power, and C/N ratio (in dB) in scientific notation (separated by commas).

For example, -6.048788000e+01,-6.186192000e+01,1.374039000e+00

:READ:CNRatio:CARRier?

Syntax

:READ:CNRatio:CARRier?

Description

Executes one C/N ratio measurement and returns the carrier power.

Remarks

The power unit of the return value is consistent with the current Y-axis unit.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

This command is only available for GPSA mode.

Return Format

The query returns the carrier power in scientific notation. For example, -1.484203000e+01

:READ:CNRatio:CNRatio?

Syntax

:READ:CNRatio:CNRatio?

Description

Executes one C/N ratio measurement and returns the C/N ratio.

Remarks

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

This command is only available for GPSA mode.

Return Format

The query returns the C/N ratio in scientific notation. For example, 8.956909000e-02

:READ:CNRatio:NOISe?

Syntax

:READ:CNRatio:NOISe?

Description

Executes one C/N ratio measurement and returns the noise power.

Remarks

The power unit of the return value is consistent with the current Y-axis unit.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

This command is only available for GPSA mode.

Return Format

The query returns the noise power in scientific notation. For example, -1.442294000e+01

:READ:EBWidth?

Syntax

:READ:EBWidth?

Description

Executes one emission bandwidth measurement and returns the measurement results.

Remarks

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

This command is only available for GPSA mode.

Return Format

The query returns the emission bandwidth measurement results in scientific notation, and its unit is Hz. For example, 5.000000000+04

:READ:HARMonics:AMPLitude:ALL?

Syntax

:READ:HARMonics:AMPLitude:ALL?

Description

Executes one harmonic distortion measurement and returns the amplitudes of the first 10 harmonics.

Remarks

If the number of harmonics under measurement is less than 10, the harmonics that are not measured do not have return values.

The amplitude unit of the return value is consistent with the current Y-axis unit.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

This command is only available for GPSA mode.

Return Format

The query returns the amplitudes of the first 10 harmonics in scientific notation. They are separated by commas.

For example, -1.692102000e+01,-6.458423000e+01,-7.509421000e+01,-7.924328000e+01,-7.847027000e+01,-7.885457000e+01,-7.882358000e+01, -7.921457000e+01,-7.923057000e+01,-7.915358000e+01

:READ:HARMonics:AMPLitude? <n>

Syntax

:READ:HARMonics:AMPLitude? <n>

Description

Executes one harmonic distortion measurement and returns the amplitude of the specified harmonic.

Parameter

Name	Type	Range	Default
<n>	Integer	1 to 10	—

Remarks

The amplitude unit of the return value is consistent with the current Y-axis unit.

The query returns --- when the harmonic read does not have data.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

This command is only available for GPSA mode.

Return Format

The query returns the amplitude of the specified harmonic in scientific notation.

For example, -1.692102000e+01

:READ:HARMonics[:DISTortion]?**Syntax**

:READ:HARMonics[:DISTortion]?

Description

Executes one harmonic distortion measurement and returns the percentage of the total harmonic distortion.

Remarks

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

This command is only available for GPSA mode.

Return Format

Queries the percentage of the total harmonic distortion in scientific notation. For example, 2.490393000e+02

:READ:HARMonics:FREQuency:ALL?**Syntax**

:READ:HARMonics:FREQuency:ALL?

Description

Executes one harmonic distortion measurement and returns the frequencies of the first 10 harmonics.

Remarks

If the number of harmonics under measurement is less than 10, the harmonics that are not measured do not have return values.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

This command is only available for GPSA mode.

Return Format

The query returns the frequencies in scientific notation (separated by commas). The unit is Hz. For example, 4.550000000e+07,9.100000000e+07,1.365000000e+07

:READ:HARMonics:FREQuency? <n>**Syntax**

:READ:HARMonics:FREQuency? <n>

Description

Executes one harmonic distortion measurement and returns the frequency of the specified harmonic.

Parameter

Name	Type	Range	Default
<n>	Integer	1 to 10	—

Remarks

The query returns --- when the harmonic read does not have data.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

This command is only available for GPSA mode.

Return Format

The query returns the frequency of the specified harmonic in scientific notation. The unit is Hz. For example, 4.550000000e+07

:READ:HARMonics:FUNDamental?**Syntax**

:READ:HARMonics:FUNDamental?

Description

Executes one harmonic distortion measurement and returns the frequency of the fundamental waveform.

Remarks

This command has the same function as :READ:HARMonics:FREQuency? 1.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

This command is only available for GPSA mode.

Return Format

The query returns the frequency of the fundamental waveform in scientific notation. The unit is Hz. For example, 4.550000000e+07

:READ:OBWidth?**Syntax**

:READ:OBWidth?

Description

Executes one occupied bandwidth measurement and returns the measurement results.

Remarks

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

This command is only available for GPSA mode.

Return Format

The query returns the occupied bandwidth (Hz) and the transmit frequency error (Hz) in scientific notation (separated by commas).

For example, 1.860000000e+06,2.000000000e+04

:READ:OBWidth:OBWidth?**Syntax**

:READ:OBWidth:OBWidth?

Description

Executes one occupied bandwidth measurement and returns the occupied bandwidth.

Remarks

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

This command is only available for GPSA mode.

Return Format

The query returns the occupied bandwidth in scientific notation. Its unit is Hz. For example, 1.860000000e+06

:READ:OBWidth:OBWidth:FERRor?**Syntax**

:READ:OBWidth:OBWidth:FERRor?

Description

Executes one occupied bandwidth measurement and returns the transmit frequency error.

Remarks

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

This command is only available for GPSA mode.

Return Format

The query returns the transmit frequency error in scientific notation. The unit is Hz. For example, 2.000000000+04

:READ:SANalyzer<n>?

Syntax

:READ:SANalyzer<n>?

Description

Queries the measurement results or trace data in the buffer.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	—

Remarks

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

This command is only available for GPSA mode.

Return Format

The query returns the measurement data of Trace n in scientific notation. The measurement data are returned with a pair of data (x,y), separated by commas. The unit is Hz.

Example

The following query returns 0,0,0,0,-1.000000000e+02,0,801,0,0,0,-3.19e+01,0.00e+00,0.00e+00,0.00e+00,0.00e+00,0.00e+00,0.00e+00,0.00e+00
:FETCh:SANalyzer1?

:READ:TOIntercept?

Syntax

:READ:TOIntercept?

Description

Executes one TOI measurement and returns the measurement results.

Remarks

The amplitude unit of the return value is consistent with the current Y-axis unit.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

This command is only available for GPSA mode.

Return Format

The query returns the measurement results of TOI in the following format:

Base Lower frequency (Hz), amplitude, Base Upper frequency (Hz), amplitude, 3rd Order Lower frequency (Hz), amplitude, intercept, 3rd Order Upper frequency (Hz), amplitude, intercept.

For example, 1.500450000e+09,-8.131735000e+01,1.500450000e+09,-8.131735000e+01,1.500450000e+09,-8.131735000e+01,-8.131735000e+01,1.500450000e+09,-8.131735000e+01,-8.131735000e+01

:READ:TOIntercept:IP3?

Syntax

:READ:TOIntercept:IP3?

Description

Executes one TOI measurement and returns the value of the intercept of the Third Order Lower or the Third Order Upper, whichever is smaller.

Remarks

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

This command is only available for GPSA mode.

Return Format

The query returns the minor one in scientific notation. For example, -8.131735000e+01

:READ:TPOWer?

Syntax

:READ:TPOWer?

Description

Executes one T-power measurement and returns the measurement results.

Remarks

The power unit of the return value is consistent with the current Y-axis unit.

This command will select data from the latest measurement results, and then transmit the data to the output buffer.

This command is only available for GPSA mode.

Return Format

The query returns the T-power measurement result in scientific notation. For example, -1.658941000e+01

[[:SENSe] Commands

Command List:

- ◆ [\[:SENSe\]:ACPower:AVERage:COUNT](#)
- ◆ [\[:SENSe\]:ACPower:AVERage\[:STATe\]](#)
- ◆ [\[:SENSe\]:ACPower:AVERage:TCONtrol](#)
- ◆ [\[:SENSe\]:ACPower:BANDwidth:ACHannel](#)
- ◆ [\[:SENSe\]:ACPower:BANDwidth:INTEgration](#)
- ◆ [\[:SENSe\]:ACPower:CSPacing](#)
- ◆ [\[:SENSe\]:ACQuisition:TIME](#)
- ◆ [\[:SENSe\]:ACQuisition:TIME:AUTO](#)
- ◆ [\[:SENSe\]:ACQuisition:TIME:PVTime](#)
- ◆ [\[:SENSe\]:ACQuisition:TIME:PVTime:AUTO](#)
- ◆ [\[:SENSe\]:AVERage:COUNT](#)
- ◆ [\[:SENSe\]:AVERage:COUNT:CURRent?](#)
- ◆ [:TRACe:AVERage:COUNT:CURRent?](#)
- ◆ [\[:SENSe\]:AVERage:TYPE](#)
- ◆ [:TRACe<n>:AVERage:TYPE](#)
- ◆ [\[:SENSe\]:AVERage:TYPE:AUTO](#)
- ◆ [\[:SENSe\]:BANDwidth|BWIDth:EMIFilter:STATe](#)
- ◆ [\[:SENSe\]:BANDwidth|BWIDth\[:RESolution\]](#)
- ◆ [\[:SENSe\]:BANDwidth|BWIDth\[:RESolution\]:AUTO](#)
- ◆ [\[:SENSe\]:BANDwidth|BWIDth\[:RESolution\]:SELEct](#)
- ◆ [\[:SENSe\]:BANDwidth|BWIDth\[:RESolution\]:SELEct:AUTO\[:STATe\]](#)
- ◆ [\[:SENSe\]:BANDwidth|BWIDth:SHAPE](#)
- ◆ [\[:SENSe\]:BANDwidth|BWIDth:VIDeo](#)
- ◆ [\[:SENSe\]:BANDwidth|BWIDth:VIDeo:AUTO](#)
- ◆ [\[:SENSe\]:BANDwidth|BWIDth:VIDeo:RATio](#)
- ◆ [\[:SENSe\]:BANDwidth|BWIDth:VIDeo:RATio:AUTO](#)
- ◆ [\[:SENSe\]:AVERage:COUNT:CURRent](#)
- ◆ [\[:SENSe\]:CNRatio:AVERage:COUNT*](#)
- ◆ [\[:SENSe\]:CNRatio:AVERage\[:STATe\] *](#)
- ◆ [\[:SENSe\]:CNRatio:AVERage:TCONtrol*](#)
- ◆ [\[:SENSe\]:CNRatio:BANDwidth:INTEgration*](#)
- ◆ [\[:SENSe\]:CNRatio:BANDwidth:NOISe*](#)
- ◆ [\[:SENSe\]:CNRatio:OFFSet*](#)
- ◆ [\[:SENSe\]:CORRection:CSET:ALL:DELeTe](#)
- ◆ [\[:SENSe\]:CORRection:CSET:ALL\[:STATe\]](#)
- ◆ [\[:SENSe\]:CORRection:CSET<n>:DATA](#)

- ◆ [\[:SENSe\]:CORRection:CSET<n>:DATA:MERGe](#)
- ◆ [\[:SENSe\]:CORRection:CSET<n>:DELeTe](#)
- ◆ [\[:SENSe\]:CORRection:CSET<n>\[:STATe\]](#)
- ◆ [\[:SENSe\]:CORRection:CSET<n>:X:SPACIng](#)
- ◆ [:INPut:IMPedance](#)
- ◆ [\[:SENSe\]:CORRection:IMPedance\[:INPut\]\[:MAGNitude\]](#)
- ◆ [\[:SENSe\]:CORRection:SA\[:RF\]:GAIN](#)
- ◆ [\[:SENSe\]:DEMod](#)
- ◆ [\[:SENSe\]:DEMod:GAIN:AUTO](#)
- ◆ [\[:SENSe\]:DEMod:GAIN:INCRement](#)
- ◆ [\[:SENSe\]:DEMod:STATe](#)
- ◆ [\[:SENSe\]:DETector:TRACe:PVTime](#)
- ◆ [\[:SENSe\]:DETector\[:FUNCTion\]](#)
- ◆ [\[:SENSe\]:DETector:TRACe<n>](#)
- ◆ [\[:SENSe\]:DETector:TRACe<n>:AUTO](#)
- ◆ [\[:SENSe\]:EBWidth:AVERage:COUNT*](#)
- ◆ [\[:SENSe\]:EBWidth:AVERage\[:STATe\]*](#)
- ◆ [\[:SENSe\]:EBWidth:AVERage:TCONtrol*](#)
- ◆ [\[:SENSe\]:EBWidth:FREQuency:SPAN*](#)
- ◆ [\[:SENSe\]:EBWidth:MAXHold:STATe*](#)
- ◆ [\[:SENSe\]:EBWidth:XDB*](#)
- ◆ [\[:SENSe\]:FCAPture:BLOCK](#)
- ◆ [\[:SENSe\]:FCAPture:LENGth](#)
- ◆ [\[:SENSe\]:FCAPture:POINter](#)
- ◆ [\[:SENSe\]:FCAPture:WLENGth?](#)
- ◆ [\[:SENSe\]:FETCh:FCAPture?](#)
- ◆ [\[:SENSe\]:INITiate:FCAPture](#)
- ◆ [\[:SENSe\]:FREQuency:CENTer](#)
- ◆ [\[:SENSe\]:FREQuency:CENTer:STEP:AUTO](#)
- ◆ [\[:SENSe\]:FREQuency:CENTer:STEP\[:INCRement\]](#)
- ◆ [\[:SENSe\]:FREQuency:OFFSet](#)
- ◆ [\[:SENSe\]:FREQuency:SPAN](#)
- ◆ [\[:SENSe\]:FREQuency:SPAN:BANDwidth\[:RESolution\]:RATio](#)
- ◆ [\[:SENSe\]:FREQuency:SPAN:BANDwidth\[:RESolution\]:RATio:AUTO](#)
- ◆ [\[:SENSe\]:FREQuency:SPAN:FULL](#)
- ◆ [\[:SENSe\]:FREQuency:SPAN:PREVious](#)
- ◆ [\[:SENSe\]:FREQuency:SPAN:ZERO](#)
- ◆ [\[:SENSe\]:FREQuency:START](#)
- ◆ [\[:SENSe\]:FREQuency:STOP](#)

- ◆ [\[:SENSe\]:FREQuency:TUNE:IMMediate](#)
- ◆ [\[:SENSe\]:HDISt:AVERage:COUNT*](#)
- ◆ [\[:SENSe\]:HDISt:AVERage\[:STATe\]*](#)
- ◆ [\[:SENSe\]:HDISt:AVERage:TCONtrol*](#)
- ◆ [\[:SENSe\]:HDISt:NUMBers*](#)
- ◆ [\[:SENSe\]:HDISt:TIME*](#)
- ◆ [\[:SENSe\]:MCHPower:AVERage:COUNT*](#)
- ◆ [\[:SENSe\]:MCHPower:AVERage\[:STATe\]*](#)
- ◆ [\[:SENSe\]:MCHPower:AVERage:TCONtrol*](#)
- ◆ [\[:SENSe\]:MCHPower:FREQuency:CENTer*](#)
- ◆ [\[:SENSe\]:MCHPower:CHANnel:ADD*](#)
- ◆ [\[:SENSe\]:MCHPower:CHANnel:DATA:NEW](#)
- ◆ [\[:SENSe\]:MCHPower:CHANnel:DATA](#)
- ◆ [\[:SENSe\]:MCHPower:CHANnel:DATA?](#)
- ◆ [\[:SENSe\]:MCHPower:CHANnel:DELeTe](#)
- ◆ [\[:SENSe\]:MCHPower:CHANnel:DELeTe:ALL](#)
- ◆ [\[:SENSe\]:MCHPower:CHANnel:RESult?](#)
- ◆ [\[:SENSe\]:MCHPower:FREQuency:SPAN*](#)
- ◆ [\[:SENSe\]:MCHPower:SHET*](#)
- ◆ [\[:SENSe\]:OBWidth:AVERage:COUNT*](#)
- ◆ [\[:SENSe\]:OBWidth:AVERage\[:STATe\]*](#)
- ◆ [\[:SENSe\]:OBWidth:AVERage:TCONtrol*](#)
- ◆ [\[:SENSe\]:OBWidth:FREQuency:SPAN*](#)
- ◆ [\[:SENSe\]:OBWidth:MAXHold:STATe*](#)
- ◆ [\[:SENSe\]:OBWidth:PERCent*](#)
- ◆ [\[:SENSe\]:POWER\[:RF\]:ATTenuation](#)
- ◆ [\[:SENSe\]:POWER\[:RF\]:ATTenuation:AUTO](#)
- ◆ [\[:SENSe\]:POWER\[:RF\]:GAIN\[:STATe\]](#)
- ◆ [\[:SENSe\]:POWER\[:RF\]:MIXer:RANGe\[:UPPer\]](#)
- ◆ [\[:SENSe\]:SIGCapture:2FSK:AMPDown*](#)
- ◆ [\[:SENSe\]:SIGCapture:2FSK:AMPUp*](#)
- ◆ [\[:SENSe\]:SIGCapture:2FSK:MARK1:FREQ*](#)
- ◆ [\[:SENSe\]:SIGCapture:2FSK:MARK1:SWitch\[:STATe\]*](#)
- ◆ [\[:SENSe\]:SIGCapture:2FSK:MARK2:FREQ*](#)
- ◆ [\[:SENSe\]:SIGCapture:2FSK:MARK2:SWitch\[:STATe\]*](#)
- ◆ [\[:SENSe\]:SIGCapture:2FSK:MAXHold\[:STATe\]*](#)
- ◆ [\[:SENSe\]:SIGCapture:2FSK:PEAKAmp?*](#)
- ◆ [\[:SENSe\]:SIGCapture:2FSK:PEAKFreq?*](#)
- ◆ [\[:SENSe\]:SIGCapture:2FSK:PF?](#)

- ◆ [\[:SENSe\]:SIGCapture:2FSK:PFSWitch\[:STATe\]*](#)
- ◆ [\[:SENSe\]:SIGCapture:2FSK:RESet*](#)
- ◆ [\[:SENSe\]:SIGCapture:2FSK:SIGNal*](#)
- ◆ [\[:SENSe\]:SWEep:POINts](#)
- ◆ [\[:SENSe\]:SWEep:TIME](#)
- ◆ [\[:SENSe\]:SWEep:TIME:AUTO](#)
- ◆ [\[:SENSe\]:SWEep:TIME:AUTO:RULEs](#)
- ◆ [\[:SENSe\]:TOI:AVERage:COUNt*](#)
- ◆ [\[:SENSe\]:TOI:AVERage\[:STATe\]*](#)
- ◆ [\[:SENSe\]:TOI:AVERage:TCONtrol*](#)
- ◆ [\[:SENSe\]:TOI:FREQuency:SPAN*](#)
- ◆ [\[:SENSe\]:TPOWer:AVERage:COUNt*](#)
- ◆ [\[:SENSe\]:TPOWer:AVERage\[:STATe\]*](#)
- ◆ [\[:SENSe\]:TPOWer:AVERage:TCONtrol*](#)
- ◆ [\[:SENSe\]:TPOWer:LLIMit*](#)
- ◆ [\[:SENSe\]:TPOWer:MODE*](#)
- ◆ [\[:SENSe\]:TPOWer:RLIMit*](#)
- ◆ [\[:SENSe\]:VSWR:FREFlect**](#)
- ◆ [\[:SENSe\]:VSWR:NREFlect**](#)
- ◆ [\[:SENSe\]:VSWR:RESet**](#)
- ◆ [\[:SENSe\]:VSWR:STATe**](#)

Remarks: The commands with * are only available for the RSA3000E series that has been installed with advanced measurement kit (AMK) option. The commands with ** are only available for the RSA3000E series that has been installed with the VSWR measurement kit option.

[[:SENSe]:ACPower:AVERage:COUNT

Syntax

[[:SENSe]:ACPower:AVERage:COUNT <integer>
[[:SENSe]:ACPower:AVERage:COUNT?

Description

Sets the average count of the ACP measurement.
Queries the average count of the ACP measurement.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 1,000	10

Remarks

This command is only valid when the adjacent channel power measurement in GPSA mode is enabled.

Return Format

The query returns the average count in integer.

Example

The following command sets the average count to 100.
[:SENSe]:ACPower:AVERage:COUNT 100

The following query returns 100.
[:SENSe]:ACPower:AVERage:COUNT?

[[:SENSe]:ACPower:AVERage[:STATe]

Syntax

[[:SENSe]:ACPower:AVERage[:STATe] OFF|ON|0|1
[[:SENSe]:ACPower:AVERage[:STATe]?

Description

Enables or disables the average measurement function of the ACP measurement.
Queries the status of the average measurement function of the ACP measurement.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

This command is only valid when the adjacent channel power measurement in GPSA mode is enabled.

Return Format

The query returns 0 or 1.

Example

The following command enables the average measurement function.
[:SENSe]:ACPower:AVERage:STATe ON or :SENSe:ACPower:AVERage:STATe 1

The following query returns 1.
[:SENSe]:ACPower:AVERage:STATe?

[[:SENSe]:ACPower:AVERage:TCONtrol]

Syntax

[[:SENSe]:ACPower:AVERage:TCONtrol EXPonential|REPeat
[:SENSe]:ACPower:AVERage:TCONtrol?

Description

Selects the average mode of the adjacent channel power measurement.
Queries the average mode of the adjacent channel power measurement.

Parameter

Name	Type	Range	Default
—	Keyword	EXPonential REPeat	EXPonential

Remarks

EXPonential: indicates the exponential average.

REPeat: indicates the repeat average.

When "EXPonential" is selected, the result is the exponential average of the measurement results obtained in the past N times (N is specified in [\[:SENSe\]:ACPower:AVERage:COUnT](#)).

When "REPeat" is selected, the result is the arithmetic average of the measurement results obtained in the past N times (N is specified in [\[:SENSe\]:ACPower:AVERage:COUnT](#)).

This command is only valid when the adjacent channel power measurement in GPSA mode is enabled.

Return Format

The query returns EXP or REP.

Example

The following command selects repeat average to the average mode.

:SENSe:ACPower:AVERage:TCONtrol REPeat

The following query returns REP.

:SENSe:ACPower:AVERage:TCONtrol?

[[:SENSe]:ACPower:BANDwidth:ACHannel]

Syntax

[[:SENSe]:ACPower:BANDwidth:ACHannel <freq>
[:SENSe]:ACPower:BANDwidth:ACHannel?

Description

Sets the bandwidth of the adjacent channel.

Queries the bandwidth of the adjacent channel.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	3 Hz to 1 GHz	2 MHz

Remarks

This command is only valid when the adjacent channel power measurement in GPSA mode is enabled.

Return Format

The query returns the bandwidth of the adjacent channel in scientific notation. Its unit is Hz.

Example

The following command sets the bandwidth of the adjacent channel to 1 MHz.

```
:SENSe:ACPower:BANDwidth:ACHannel 1000000
```

The following query returns 1.000000000e+06.

```
:SENSe:ACPower:BANDwidth:ACHannel?
```

[[:SENSe]:ACPower:BANDwidth:INTEgration**Syntax**

```
[[:SENSe]:ACPower:BANDwidth:INTEgration <freq>
```

```
[[:SENSe]:ACPower:BANDwidth:INTEgration?
```

Description

Sets the bandwidth of the main channel.

Queries the bandwidth of the main channel.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	3 Hz to 1 GHz	2 MHz

Remarks

This command is only valid when the adjacent channel power measurement in GPSA mode is enabled.

Return Format

The query returns the bandwidth of the main channel in scientific notation. Its unit is Hz.

Example

The following command sets the bandwidth of the main channel to 1 MHz.

```
:SENSe:ACPower:BANDwidth:INTEgration 1000000
```

The following query returns 1.000000000e+06.

```
:SENSe:ACPower:BANDwidth:INTEgration?
```

[[:SENSe]:ACPower:CSPacing**Syntax**

```
[[:SENSe]:ACPower:CSPacing <freq>
```

```
[[:SENSe]:ACPower:CSPacing?
```

Description

Sets the center frequency difference (channel spacing) between the main channel and the adjacent channels.

Queries the channel spacing.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	3 Hz to 1 GHz	2 MHz

Remarks

This command is only valid when the adjacent channel power measurement in GPSA mode is enabled.

Return Format

The query returns the channel spacing in scientific notation. Its unit is Hz.

Example

The following command sets the channel spacing to 1 MHz.

```
:SENSe:ACPower:CSPacing 1000000
```

The following query returns 1.000000000e+06.

```
:SENSe:ACPower:CSPacing?
```

[[:SENSe]:ACQuisition:TIME**Syntax**

```
[[:SENSe]:ACQuisition:TIME <time>
```

```
[[:SENSe]:ACQuisition:TIME?
```

Description

Sets the acquisition time for producing one single trace or one bitmap. The unit is s.

Queries the acquisition time for producing one single trace or one bitmap.

Parameter

Name	Type	Range	Default
<time>	Consecutive Real Number	32 ms to 40 s 100 μs to 40 s (others)	1 ms

Remarks

This command is only available for Normal, Density, Spectrogram, and Density Spectrogram in RTSA mode.

Return Format

The query returns the acquisition time in scientific notation.

Example

The following command sets the acquisition time to 0.5 s.

```
:SENSe:ACQuisition:TIME 0.5
```

The following query returns 5.000000000e-01.

```
:SENSe:ACQuisition:TIME?
```

[[:SENSe]:ACQuisition:TIME:AUTO**Syntax**

```
[[:SENSe]:ACQuisition:TIME:AUTO OFF|ON|0|1
```

```
[[:SENSe]:ACQuisition:TIME:AUTO?
```

Description

Enables or disables the auto acquisition time for producing one single trace or one bitmap.

Queries the status of the auto acquisition time for producing one single trace or one bitmap.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	ON 1

Remarks

This command is only available for Normal, Density, Spectrogram, and Density Spectrogram in RTSA mode.

Return Format

The query returns 0 or 1.

Example

The following command enables the auto acquisition time for producing one single trace or one bitmap.

:SENSe:ACQquisition:TIME:AUTO ON or :SENSe:ACQquisition:TIME:AUTO 1

The following query returns 1.

:SENSe:ACQquisition:TIME:AUTO?

[[:SENSe]:ACQquisition:TIME:PVTime**Syntax**

[[:SENSe]:ACQquisition:TIME:PVTime <time>

[[:SENSe]:ACQquisition:TIME:PVTime?

Description

Sets the acquisition time for producing a trace. The unit is s.

Queries the acquisition time for producing a trace.

Parameter

Name	Type	Range	Default
<time>	Consecutive Real Number	0 s to 40 s	30 ms

Remarks

This command is only available for PVT, PVT Spectrum, and PVT Spectrogram in RTSA mode.

Return Format

The query returns the acquisition time in scientific notation.

Example

The following command sets the acquisition time to 0.5 s.

:SENSe:ACQquisition:TIME:PVTime 0.5

The following query returns 5.000000000e-01.

:SENSe:ACQquisition:TIME:PVTime?

[[:SENSe]:ACQquisition:TIME:PVTime:AUTO**Syntax**

[[:SENSe]:ACQquisition:TIME:PVTime:AUTO OFF|ON|0|1

[[:SENSe]:ACQquisition:TIME:PVTime:AUTO?

Description

Enables or disables the auto acquisition time for producing a trace.

Queries the status of the auto acquisition time for producing a trace.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	ON 1

Remarks

This command is only available for PvT, PvT Spectrum, and PvT Spectrogram in RTSA mode.

Return Format

The query returns 0 or 1.

Example

The following command enables the auto acquisition time for producing all the traces.

```
:SENSe:ACQuisition:TIME:PVTTime:AUTO ON or :SENSe:ACQuisition:TIME:PVTTime:AUTO 1
```

The following query returns 1.

```
:SENSe:ACQuisition:TIME:PVTTime:AUTO?
```

[[:SENSe]:AVERage:COUNT :TRACe:AVERage:COUNT

Syntax

```
[[:SENSe]:AVERage:COUNT <integer>
```

```
[[:SENSe]:AVERage:COUNT?
```

```
:TRACe:AVERage:COUNT <integer>
```

```
:TRACe:AVERage:COUNT?
```

Description

Sets the trace average count of the current measurement.

Queries the trace average count of the current measurement.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 10,000	100

Remarks

This command is available for the swept SA measurement in GPSA mode and the RTSA mode.

Return Format

The query returns the average count in integer.

Example

The following command sets the average count to 100.

```
:SENSe:AVERage:COUNT 100
```

```
:TRACe:AVERage:COUNT 100
```

The following query returns 100.

```
:SENSe:AVERage:COUNT?
```

```
:TRACe:AVERage:COUNT?
```


[[:SENSe]:AVERage:COUNT:CURRent? :TRACe:AVERage:COUNT:CURRent?

Syntax

```
[[:SENSe]:AVERage:COUNT:CURRent?  
:TRACe:AVERage:COUNT:CURRent?
```

Description

Queries the current average times of the average trace.

Return Format

The query returns the current trace average count in integer.

[[:SENSe]:AVERage:TYPE :TRACe<n>:AVERage:TYPE

Syntax

```
[[:SENSe]:AVERage:TYPE LOG|RMS|SCALar  
[:SENSe]:AVERage:TYPE?  
:TRACe<n>:AVERage:TYPE LOG|RMS|SCALar  
:TRACe<n>:AVERage:TYPE?
```

Description

Selects the average type of the swept SA analysis measurement.
Queries the average type of the swept SA analysis measurement.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	—
—	Keyword	LOG RMS SCALar	LOG

Remarks

LOG: indicates the log-power averaging.
RMS: indicates the power averaging.
SCALar: indicates the voltage averaging.
This command is only available for GPSA mode.

Return Format

The query returns LOG, RMS, or SCAL.

Example

The following command sets the average type of the swept SA analysis mode to Log.

```
:SENSe:AVERage:TYPE LOG  
:TRACe1:AVERage:TYPE LOG
```

The following query returns LOG.

```
:SENSe:AVERage:TYPE?  
:TRACe1:AVERage:TYPE LOG
```

[[:SENSe]:AVERage:TYPE:AUTO

Syntax

[[:SENSe]:AVERage:TYPE:AUTO OFF|ON|0|1
[:SENSe]:AVERage:TYPE:AUTO?

Description

Enables or disables the auto state for the average type of the swept SA analysis measurement.
Queries the on/off auto state for the average type of the swept SA analysis measurement.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

This command is only available for GPSA mode.

Return Format

The query returns 0 or 1.

Example

The following command enables the auto state for the average type of the swept SA analysis mode.
:SENSe:AVERage:TYPE:AUTO ON or :SENSe:AVERage:TYPE:AUTO 1

The following query returns 1.
:SENSe:AVERage:TYPE:AUTO?

[[:SENSe]:BANDwidth | BWIDth:EMIFilter:STATE

Syntax

[[:SENSe]:BANDwidth|BWIDth:EMIFilter:STATE OFF|ON|0|1
[:SENSe]:BANDwidth|BWIDth:EMIFilter:STATE?

Description

Enables or disables the EMI filter.
Queries the status of the EMI filter.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

ON: selects the EMI filter (-6 dB bandwidth).
OFF: selects the Gaussian filter (-3 dB bandwidth).
This command is only available for GPSA mode installed with the RSA3000E-EMC option.

Return Format

The query returns 0 or 1.

Example

The following command selects the EMI filter.
:SENSe:BANDwidth:EMIFilter:STATE ON or :SENSe:BANDwidth:EMIFilter:STATE 1
:SENSe:BWIDth:EMIFilter:STATE ON or :SENSe:BWIDth:EMIFilter:STATE 1

The following query returns 1.

```
:SENSe:BANDwidth:EMIFilter:STATe?
```

```
:SENSe:BWIDth:EMIFilter:STATe?
```

[:SENSe]:BANDwidth | BWIDth[:RESolution]

Syntax

```
[ :SENSe]:BANDwidth|BWIDth[:RESolution] <freq>
```

```
[ :SENSe]:BANDwidth|BWIDth[:RESolution]?
```

Description

Sets the resolution bandwidth (RBW).

Queries the resolution bandwidth.

Parameter

Name	Type	Range	Default
<freq>	Discrete	1 Hz to 3 MHz (at 1-3-10 step)	3 MHz

Remarks

The setting command is only available for GPSA mode. The query command is available for both the GPSA and RTSA modes.

Return Format

In GPSA mode, the query returns the resolution bandwidth in scientific notation. Its unit is Hz.

In RTSA mode, the query returns the specific frequency resolution value of RBW1 through RBW6.

Example

The following command sets RBW to 1,000 Hz.

```
:SENSe:BANDwidth:RESolution 1000
```

```
:SENSe:BWIDth:RESolution 1000
```

The following query returns 1.000000000e+03.

```
:SENSe:BANDwidth:RESolution?
```

```
:SENSe:BWIDth:RESolution?
```

[:SENSe]:BANDwidth | BWIDth[:RESolution]:AUTO

Syntax

```
[ :SENSe]:BANDwidth|BWIDth[:RESolution]:AUTO OFF|ON|0|1
```

```
[ :SENSe]:BANDwidth|BWIDth[:RESolution]:AUTO?
```

Description

Enables or disables the auto setting mode of RBW.

Queries the status of the auto setting mode of RBW.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	ON 1

Remarks

In auto mode, the resolution bandwidth changes with the span (non-zero span).

This command is only available for GPSA mode.

Return Format

The query returns 0 or 1.

Example

The following command enables the auto setting mode of RBW.

```
:SENSe:BANDwidth:RESolution:AUTO ON or :SENSe:BANDwidth:RESolution:AUTO 1
```

```
:SENSe:BWIDth:RESolution:AUTO ON or :SENSe:BWIDth:RESolution:AUTO 1
```

The following query returns 1.

```
:SENSe:BANDwidth:RESolution:AUTO?
```

```
:SENSe:BWIDth:RESolution:AUTO?
```

[:SENSe]:BANDwidth | BWIDth [:RESolution]:SElect**Syntax**

```
[ :SENSe ]:BANDwidth|BWIDth [ :RESolution ]:SElect RBW1|RBW2|RBW3|RBW4|RBW5|RBW6
```

```
[ :SENSe ]:BANDwidth|BWIDth [ :RESolution ]:SElect?
```

Description

Sets the resolution bandwidth (RBW).

Queries the resolution bandwidth.

Parameter

Name	Type	Range	Default
—	Keyword	RBW1 RBW2 RBW3 RBW4 RBW5 RBW6	RBW2

Remarks

This command is only available for RTSA mode. For details, refer to *RSA3000E User Guide*.

Return Format

The query returns RBW1, RBW2, RBW3, RBW4, RBW5, or RBW6.

Example

The following command selects RBW1.

```
:SENSe:BANDwidth:RESolution:SElect RBW1
```

```
:SENSe:BWIDth:RESolution:SElect RBW1
```

The following query returns RBW1.

```
:SENSe:BANDwidth:RESolution:SElect?
```

```
:SENSe:BWIDth:RESolution:SElect?
```

[:SENSe]:BANDwidth | BWIDth [:RESolution]:SElect:AUTO [:STATe]**Syntax**

```
[ :SENSe ]:BANDwidth|BWIDth [ :RESolution ]:SElect:AUTO [ :STATe ] OFF|ON|0|1
```

```
[ :SENSe ]:BANDwidth|BWIDth [ :RESolution ]:SElect:AUTO [ :STATe ]?
```

Description

Enables or disables the auto setting mode of RBW.

Queries the status of the auto setting mode of RBW.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	ON 1

Remarks

This command is only available for RTSA mode.

Return Format

The query returns 0 or 1.

Example

The following command enables the auto setting mode of RBW.

:SENSe:BANDwidth:RESolution:SElect:AUTO:STATe ON

or :SENSe:BANDwidth:RESolution:SElect:AUTO:STATe 1

:SENSe:BWIDth:RESolution:SElect:AUTO:STATe ON or :SENSe:BWIDth:RESolution:SElect:AUTO:STATe 1

The following query returns 1.

:SENSe:BANDwidth:RESolution:SElect:AUTO:STATe?

:SENSe:BWIDth:RESolution:SElect:AUTO:STATe?

[:SENSe]:BANDwidth | BWIDth:SHAPE**Syntax**

[:SENSe]:BANDwidth|BWIDth:SHAPE GAUSSian|FLATtop|BHARris|RECTangular|HANNing|KAISer

[:SENSe]:BANDwidth|BWIDth:SHAPE?

Description

Sets the filter type.

Queries the filter type.

Parameter

Name	Type	Range	Default
—	Keyword	GAUSSian FLATtop BHARris RECTangular HANNing KAISer	GAUSSian

Remarks

This command is only available for RTSA mode.

When "Rectangular" is set to be the filter type, the analyzer automatically selects RBW1, and "RBW2 through RBW6" is disabled.

Return Format

The query returns GAUS, FLAT, BHAR, RECT, HANN, or KAIS.

Example

The following command sets the filter type to Gaussian.

:SENSe:BANDwidth:SHAPE GAUSSian

:SENSe:BWIDth:SHAPE GAUSSian

The following query returns GAUS.

:SENSe:BANDwidth:SHAPE?

:SENSe:BWIDth:SHAPE GAUSSian

[[:SENSe]:BANDwidth | BWIDth:VIDeo

Syntax

[[:SENSe]:BANDwidth|BWIDth:VIDeo <freq>
[:SENSe]:BANDwidth|BWIDth:VIDeo?

Description

Sets the video bandwidth (VBW).
Queries the video bandwidth.

Parameter

Name	Type	Range	Default
<freq>	Discrete	1 Hz to 10 MHz (at 1-3-10 step)	3 MHz

Remarks

This command is only available for GPSA mode.

Return Format

The query returns the video bandwidth in scientific notation. Its unit is Hz.

Example

The following command sets the video bandwidth to 1,000 Hz.

:SENSe:BANDwidth:VIDeo 1000

:SENSe:BWIDth:VIDeo 1000

The following query returns 1.000000000e+03.

:SENSe:BANDwidth:VIDeo?

:SENSe:BWIDth:VIDeo?

[[:SENSe]:BANDwidth | BWIDth:VIDeo:AUTO

Syntax

[[:SENSe]:BANDwidth|BWIDth:VIDeo:AUTO OFF|ON|0|1
[:SENSe]:BANDwidth|BWIDth:VIDeo:AUTO?

Description

Enables or disables the auto setting mode of VBW.
Queries the status of the auto setting mode of VBW.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	ON 1

Remarks

This command is only available for GPSA mode.

Return Format

The query returns 0 or 1.

Example

The following command enables the auto setting mode of VBW.

:SENSe:BANDwidth:VIDeo:AUTO ON or :SENSe:BANDwidth:VIDeo:AUTO 1

:SENSe:BWIDth:VIDeo:AUTO ON or :SENSe:BWIDth:VIDeo:AUTO 1

The following query returns 1.
 :SENSe:BANDwidth:VIDeo:AUTO?
 :SENSe:BWIDth:VIDeo:AUTO?

[:SENSe]:BANDwidth | BWIDth:VIDeo:RATio

Syntax

[:SENSe]:BANDwidth|BWIDth:VIDeo:RATio <number>
 [:SENSe]:BANDwidth|BWIDth:VIDeo:RATio?

Description

Sets the V/R ratio, that is, the ratio of VBW to RBW.
 Queries the V/R ratio.

Parameter

Name	Type	Range	Default
<number>	Discrete	0.00001 to 3,000,000 (at 1-3-10 step)	1

Remarks

This command is valid for the swept measurement in GPSA mode.

Return Format

The query returns the V/R ratio in scientific notation.

Example

The following command sets the V/R ratio to 0.01.
 :SENSe:BANDwidth:VIDeo:RATio 0.01
 :SENSe:BWIDth:VIDeo:RATio 0.01

The following query returns 1.000000000e-02.
 :SENSe:BANDwidth:VIDeo:RATio?
 :SENSe:BWIDth:VIDeo:RATio?

[:SENSe]:BANDwidth | BWIDth:VIDeo:RATio:AUTO

Syntax

[:SENSe]:BANDwidth|BWIDth:VIDeo:RATio:AUTO OFF|ON|0|1
 [:SENSe]:BANDwidth|BWIDth:VIDeo:RATio:AUTO?

Description

Enables or disables the auto setting mode of V/R ratio.
 Queries the status of the auto setting mode of V/R ratio.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	ON 1

Remarks

This command is valid for the swept SA measurement in GPSA mode.

Return Format

The query returns 0 or 1.

Example

The following command enables the auto setting mode of V/R ratio.

:SENSe:BANDwidth:VIDeo:AUTO ON or :SENSe:BANDwidth:VIDeo:AUTO 1

:SENSe:BWIDth:VIDeo:AUTO ON or :SENSe:BWIDth:VIDeo:AUTO 1

The following query returns 1.

:SENSe:BANDwidth:VIDeo:AUTO?

:SENSe:BWIDth:VIDeo:AUTO?

[:SENSe]:CNRatio:AVERage:COUNT**Syntax**

[:SENSe]:CNRatio:AVERage:COUNT <integer>

[:SENSe]:CNRatio:AVERage:COUNT?

Description

Sets the average count of the C/N ratio measurement.

Queries the average count of the C/N ratio measurement.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 1,000	10

Remarks

This command is only valid when the C/N ratio measurement in GPSA mode is enabled.

Return Format

The query returns the average count in integer.

Example

The following command sets the average count to 100.

:SENSe:CNRatio:AVERage:COUNT 100

The following query returns 100.

:SENSe:CNRatio:AVERage:COUNT?

[:SENSe]:CNRatio:AVERage[:STATe]**Syntax**

[:SENSe]:CNRatio:AVERage[:STATe] OFF|ON|0|1

[:SENSe]:CNRatio:AVERage[:STATe]?

Description

Enables or disables the average measurement function of the C/N ratio measurement.

Queries the status of the average measurement function of the C/N ratio measurement.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

This command is only valid when the C/N ratio measurement in GPSA mode is enabled.

Return Format

The query returns 0 or 1.

Example

The following command enables the average measurement function.

```
:SENSe:CNRatio:AVERage:STATe 1 or :SENSe:CNRatio:AVERage:STATe ON
```

The following query returns 1.

```
:SENSe:CNRatio:AVERage:STATe?
```

[:SENSe]:CNRatio:AVERage:TCONtrol**Syntax**

```
[ :SENSe ]:CNRatio:AVERage:TCONtrol EXPonential|REPeat
```

```
[ :SENSe ]:CNRatio:AVERage:TCONtrol?
```

Description

Sets the average mode of the C/N ratio measurement.

Queries the average mode of the C/N ratio measurement.

Parameter

Name	Type	Range	Default
—	Keyword	EXPonential REPeat	EXPonential

Remarks

EXPonential: indicates the exponential average.

REPeat: indicates the repeat average.

When "EXPonential" is selected, the result is the exponential average of the measurement results obtained in the past N times (N is specified in [\[:SENSe \]:CNRatio:AVERage:COUNt](#)).

When "REPeat" is selected, the result is the arithmetic average of the measurement results obtained in the past N times (N is specified in [\[:SENSe \]:CNRatio:AVERage:COUNt](#)).

This command is only valid when the C/N ratio measurement in GPSA mode is enabled.

Return Format

The query returns EXP or REP.

Example

The following command sets repeat average to the average mode.

```
:SENSe:CNRatio:AVERage:TCONtrol REPeat
```

The following query returns REP.

```
:SENSe:CNRatio:AVERage:TCONtrol?
```

[[:SENSe]:CNRatio:BANDwidth:INTEgration

Syntax

[[:SENSe]:CNRatio:BANDwidth:INTEgration <freq>
[:SENSe]:CNRatio:BANDwidth:INTEgration?

Description

Sets the carrier bandwidth.

Queries the carrier bandwidth.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	3 Hz to 1 GHz	2 MHz

Remarks

This command is only valid when the C/N ratio measurement in GPSA mode is enabled.

The carrier bandwidth is correlated with the noise bandwidth. The range of the carrier bandwidth is from (noise bandwidth/20 to noise bandwidth×20).

Return Format

The query returns the carrier bandwidth in integer. Its unit is Hz.

Example

The following command sets the carrier bandwidth to 1 MHz.

:SENSe:CNRatio:BANDwidth:INTEgration 1000000 or :SENSe:CNRatio:BANDwidth:INTEgration 1MHz

The following query returns 1000000.

:SENSe:CNRatio:BANDwidth:INTEgration?

[[:SENSe]:CNRatio:BANDwidth:NOISe

Syntax

[[:SENSe]:CNRatio:BANDwidth:NOISe <freq>
[:SENSe]:CNRatio:BANDwidth:NOISe?

Description

Sets the noise bandwidth.

Queries the noise bandwidth.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	3 Hz to 1 GHz	2 MHz

Remarks

This command is only valid when the C/N ratio measurement in GPSA mode is enabled.

Return Format

The query returns the noise bandwidth in integer. Its unit is Hz.

Example

The following command sets the noise bandwidth to 1 MHz.

:SENSe:CNRatio:BANDwidth:NOISe 1000000

The following query returns 1000000.
:SENSe:CNRatio:BANDwidth:NOISe?

[:SENSe]:CNRatio:OFFSet

Syntax

[:SENSe]:CNRatio:OFFSet <freq>
[:SENSe]:CNRatio:OFFSet?

Description

Sets the center frequency difference (offset frequency) between the carrier waveform and the noise.
Queries the offset frequency.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	3 Hz to 1 GHz	2 MHz

Remarks

This command is only valid when the C/N ratio measurement in GPSA mode is enabled.

Return Format

The query returns the offset frequency in integer. Its unit is Hz.

Example

The following command sets the offset frequency to 1 MHz.
:SENSe:CNRatio:OFFSet 1000000

The following query returns 1000000.
:SENSe:CNRatio:OFFSet?

[:SENSe]:CORRection:CSET:ALL:DELeTe

Syntax

[:SENSe]:CORRection:CSET:ALL:DELeTe

Description

Deletes all the amplitude correction data.

Remarks

This command is only available for GPSA mode.

[:SENSe]:CORRection:CSET:ALL[:STATe]

Syntax

[:SENSe]:CORRection:CSET:ALL[:STATe] OFF|ON|0|1
[:SENSe]:CORRection:CSET:ALL[:STATe]?

Description

Enables or disables all the amplitude correction functions.
Queries the status of the amplitude correction function.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	OFF 0

Remarks

This command is only available for GPSA mode.

When the function is disabled, settings for all the corrections are disabled.

When the function is enabled, settings for all the corrections are enabled, and the "Antenna" correction is enabled by default.

To enable or disable settings for each correction, refer to the [\[:SENSe\]:CORRection:CSET<n>\[:STATe\]](#) command.

Return Format

The query returns 0 or 1.

Example

The following command enables the amplitude correction function.

:SENSe:CORRection:CSET:ALL:STATe ON or :SENSe:CORRection:CSET:ALL:STATe 1

The following query returns 1.

:SENSe:CORRection:CSET:ALL:STATe?

[:SENSe]:CORRection:CSET<n>:DATA**Syntax**

[:SENSe]:CORRection:CSET<n>:DATA <x>,<ampl>,{<x>,<ampl>}

[:SENSe]:CORRection:CSET<n>:DATA?

Description

Creates an amplitude correction curve by using the specified data.

Queries the specified amplitude correction data.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4	--
<x>	Consecutive Real Number	0 Hz to 3 GHz	--
<ampl>	Consecutive Real Number	-120 dBm to +100 dBm	--

Remarks

This command is only available for GPSA mode.

<n>: 1 indicates antenna; 2 indicates cable; 3 indicates other, and 4 indicates user.

The range for the number of editing points is from 1 to 200.

Return Format

The query returns the specified amplitude correction data in <x>,<ampl>,{<x>,<ampl>} format.

Example

The following command creates an amplitude correction curve.

:SENSe:CORRection:CSET1:DATA 900E6,0.3,1.0E9,0.35,1.3E9,0.2

The following query returns 9.000000000e+08,3.000000000e-01,1.000000000e+09,3.500000000e-01,1.300000000e+09,2.000000000e-01.

:SENSe:CORRection:CSET1:DATA?

[[:SENSe]:CORRection:CSET<n>:DATA:MERGe

Syntax

[[:SENSe]:CORRection:CSET<n>:DATA:MERGe <x>,<ampl>,{<x>,<ampl>}

Description

Adds correction data to the current correction curve.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4	--
<x>	Consecutive Real Number	0 Hz to 3 GHz	--
<ampl>	Consecutive Real Number	-120 dBm to +100 dBm	--

Remarks

This command is only available for GPSA mode.

<n>: 1 indicates antenna; 2 indicates cable; 3 indicates other, and 4 indicates user.

The range for the number of editing points is from 1 to 200.

Return Format

The query returns the added amplitude correction data in <x>,<ampl>,{<x>,<ampl>} format.

Example

The following command adds two points to the current correction curve.

:SENSe:CORRection:CSET1:DATA 900E6,0.3,1.0E9,0.35

[[:SENSe]:CORRection:CSET<n>:DELeTe

Syntax

[[:SENSe]:CORRection:CSET<n>:DELeTe

Description

Deletes the specified amplitude correction setting.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4	--

Remarks

This command is only available for GPSA mode.

<n>: 1 indicates antenna; 2 indicates cable; 3 indicates other, and 4 indicates user.

Example

The following command deletes the antenna correction setting.

:SENSe:CORRection:CSET1:DELeTe

[[:SENSe]:CORRection:CSET<n>[:STATe]

Syntax

```
[[:SENSe]:CORRection:CSET<n>[:STATe] OFF|ON|0|1
[:SENSe]:CORRection:CSET<n>[:STATe]?
```

Description

Enables or disables the specified amplitude correction function.
Queries the status of the specified amplitude correction function.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4	--
--	Bool	OFF ON 0 1	OFF 0

Remarks

This command is only available for GPSA mode.
<n>: 1 indicates antenna; 2 indicates cable; 3 indicates other, and 4 indicates user.

Return Format

The query returns 0 or 1.

Example

The following command disables the "Antenna" amplitude correction function.
:SENSe:CORRection:CSET1:STATe OFF or :SENSe:CORRection:CSET1:STATe 0

The following query returns 0.
:SENSe:CORRection:CSET1:STATe?

[[:SENSe]:CORRection:CSET<n>:X:SPACing

Syntax

```
[[:SENSe]:CORRection:CSET<n>:X:SPACing LINear|LOGarithmic
[:SENSe]:CORRection:CSET<n>:X:SPACing?
```

Description

Selects the frequency interpolation mode for amplitude correction.
Queries the frequency interpolation mode for amplitude correction.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4	--
--	Discrete	LINear LOGarithmic	LINear

Remarks

This command is only available for GPSA mode.
<n>: 1 indicates antenna; 2 indicates cable; 3 indicates other, and 4 indicates user.
In Lin mode, linear interpolation is adopted for the frequency, and log interpolation is adopted for the amplitude.
In Log mode, for both of frequency and amplitude, we interpolate on a log scale.

Return Format

The query returns LIN or LOG.

Example

The following command sets the frequency interpolation mode to LINear.

```
:SENSe:CORRection:CSET1:X:SPACing LINear
```

The following query returns LIN.

```
:SENSe:CORRection:CSET1:X:SPACing?
```

:INPut:IMPedance **[[:SENSe]:CORRection:IMPedance[:INPut]][:MAGNitude]**

Syntax

```
:INPut:IMPedance 50|75
```

```
:INPut:IMPedance?
```

```
[[:SENSe]:CORRection:IMPedance[:INPut]][:MAGNitude] 50|75
```

```
[[:SENSe]:CORRection:IMPedance[:INPut]][:MAGNitude]?
```

Description

Sets the input impedance for voltage-to-power conversion. The unit is Ω .

Queries the input impedance for voltage-to-power conversion.

Parameter

Name	Type	Range	Default
—	Discrete	50 75	50

Remarks

If the output impedance of the system under measurement is 75 Ω , you should use a 75 Ω to 50 Ω adapter (option) supplied by **RIGOL** to connect the analyzer with the system under test, and then set the input impedance to 75 Ω .

Return Format

The query returns 50 or 75.

Example

The following command sets the input impedance to 75 Ω .

```
:INPut:IMPedance 75 or :SENSe:CORRection:IMPedance:INPut:MAGNitude 75
```

The following query returns 75.

```
:INPut:IMPedance? or :SENSe:CORRection:IMPedance:INPut:MAGNitude?
```

[[:SENSe]:CORRection:SA[:RF]:GAIN

Syntax

```
[[:SENSe]:CORRection:SA[:RF]:GAIN <rel_ampl>
```

```
[[:SENSe]:CORRection:SA[:RF]:GAIN?
```

Description

Sets the external gain.

Queries the external gain.

Parameter

Name	Type	Range	Default
<rel_ampl>	Consecutive Real Number	-120 dB to 120 dB	0 dB

Return Format

The query returns the external gain value in scientific notation. The unit is dB.

Example

The following command set the external gain value to 20 dB.

```
:SENSe:CORRection:SA:RF:GAIN 20
```

The following query returns 2.000000000e+01.

```
:SENSe:CORRection:SA:RF:GAIN?
```

[[:SENSe]:DEMod**Syntax**

```
[[:SENSe]:DEMod AM|FM|OFF
```

```
[[:SENSe]:DEMod?
```

Description

Sets the demodulation type or disables the demodulation.

Queries the demodulation type.

Parameter

Name	Type	Range	Default
—	Keyword	AM FM OFF	OFF

Remarks

AM: indicates the amplitude modulation.

FM: indicates the frequency modulation.

OFF: indicates off.

When AM or FM is selected, the spectrum analyzer enables the demodulation function automatically.

When OFF is selected, the spectrum analyzer disables the demodulation function.

This command is only available for GPSA mode.

Return Format

The query returns AM, FM, or OFF.

Example

The following command sets the demodulation type to AM.

```
:SENSe:DEMod AM
```

The following query returns AM.

```
:SENSe:DEMod?
```

[[:SENSe]:DEMod:GAIN:AUTO**Syntax**

```
[[:SENSe]:DEMod:GAIN:AUTO OFF|ON|0|1
```

```
[[:SENSe]:DEMod:GAIN:AUTO?
```

Description

Enables or disables the auto setting mode of the signal gain.

Queries the status of the signal gain.

Parameter

Name	Type	Range	Default
---	Bool	OFF ON 0 1	ON 1

Remarks

This command is only valid when the demodulation function (i.g. AM or FM is selected to be the demodulation type) in GPSA mode is enabled.

Return Format

The query returns 0 or 1.

Example

The following command enables the auto setting mode of signal gain.

:SENSe:DEMod:GAIN:AUTO ON or :SENSe:DEMod:GAIN:AUTO 1

The following query returns 1.

:SENSe:DEMod:GAIN:AUTO?

[[:SENSe]:DEMod:GAIN:INCRement**Syntax**

[[:SENSe]:DEMod:GAIN:INCRement <integer>

[[:SENSe]:DEMod:GAIN:INCRement?

Description

Sets the signal gain.

Queries the signal gain.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 7	7

Remarks

This command is only valid when the demodulation function (i.g. AM or FM is selected to be the demodulation type) in GPSA mode is enabled.

Return Format

The query returns the signal gain in integer.

Example

The following command sets the signal gain to 4.

:SENSe:DEMod:GAIN:INCRement 4

The following query returns 4.

:SENSe:DEMod:GAIN:INCRement?

[[:SENSe]:DEMod:STATe

Syntax

[[:SENSe]:DEMod:STATe OFF|ON|0|1
[:SENSe]:DEMod:STATe?

Description

Enables or disables the demodulation function.
Queries the status of the demodulation function.

Parameter

Name	Type	Range	Default
——	Bool	OFF ON 0 1	OFF 0

Remarks

When the demodulation function is enabled, the analyzer selects AM as the demodulation type by default.
This command is only available for GPSA mode.

Return Format

The query returns 0 or 1.

Example

The following command enables the demodulation function.
:SENSe:DEMod:STATe 1 or :SENSe:DEMod:STATe ON

The following query returns 1.
:SENSe:DEMod:STATe?

[[:SENSe]:DETECTOR:TRACe:PVTTime

Syntax

[[:SENSe]:DETECTOR:TRACe:PVTTime AVERage|NEGative|POSitive|SAMPLE
[:SENSe]:DETECTOR:TRACe:PVTTime?

Description

Sets the detector type of the trace in the PVT view.
Queries the detector type of the trace in the PVT view.

Parameter

Name	Type	Range	Default
——	Keyword	AVERage NEGative POSitive SAMPLE	POSitive

Remarks

AVERage: indicates the voltage average.
NEGative: indicates the negative peak.
POSitive: indicates the positive peak.
SAMPLE: indicates the sample detector.
This command is only available for RTSA mode.

Return Format

The query returns AVER, NEG, POS, or SAMP.

Example

The following command sets the trace detector type to Positive.

```
:SENSe:DETECTOR:TRACE:PVTIME POSitive
```

The following query returns POS.

```
:SENSe:DETECTOR:TRACE:PVTIME?
```

[[:SENSe]:DETECTOR[:FUNCTION] [:SENSe]:DETECTOR:TRACE<n>

Syntax

```
[[:SENSe]:DETECTOR[:FUNCTION] AVERage (VAverage)
|NEGative|NORMal|POSitive|SAMPLE|QPEak|RAverage (RMS)
[:SENSe]:DETECTOR[:FUNCTION]?
[:SENSe]:DETECTOR:TRACE<n> AVERage (VAverage)
|NEGative|NORMal|POSitive|SAMPLE|QPEak|RAverage (RMS)
[:SENSe]:DETECTOR:TRACE<n>?
```

Description

Sets the detector type for the specified trace.

Queries the detector type for the specified trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	1
—	Keyword	AVERage (VAverage) NEGative NORMal POSitive SAMPLE QPEak RAverage (RMS)	POSitive

Remarks

AVERage|VAverage: indicates the voltage average.

NEGative: indicates the negative peak.

NORMal: indicates the normal detector.

POSitive: indicates the positive peak.

SAMPLE: indicates the sample detector.

QPEak: indicates the quasi-peak. It is only available for the instrument installed with the RSA3000E-EMC option.

RAverage|RMS: indicates the RMS average.

In RTSA mode, the parameters in this command only include AVERage, NEGative, POSitive, and SAMPLE.

Return Format

The query returns AVER, NEG, NORM, POS, SAMP, QPE, or RAV.

Example

The following command sets the detector type of Trace 1 to Positive.

```
:SENSe:DETECTOR:FUNCTION POSitive
```

```
:SENSe:DETECTOR:TRACE1 POSitive
```

The following query returns POS.

```
:SENSe:DETECTOR:FUNCTION?
```

```
:SENSe:DETECTOR:TRACE1?
```

[[:SENSe]:DETEctor:TRACe<n>:AUTO

Syntax

```
[[:SENSe]:DETEctor:TRACe<n>:AUTO OFF|ON|0|1
[:SENSe]:DETEctor:TRACe<n>:AUTO?
```

Description

Enables or disables the Detector Auto function for the specified trace.
Queries the status of the Detector Auto function for the specified trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	1
—	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command enables the Detector Auto function for Trace 1.
:SENSe:DETEctor:TRACe1:AUTO ON or :SENSe:DETEctor:TRACe1:AUTO 1

The following query returns 1.
:SENSe:DETEctor:TRACe1:AUTO?

[[:SENSe]:EBWidth:AVERage:COUNT

Syntax

```
[[:SENSe]:EBWidth:AVERage:COUNT <integer>
[:SENSe]:EBWidth:AVERage:COUNT?
```

Description

Sets the average count of the emission bandwidth measurement.
Queries the average count of the emission bandwidth measurement.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 1,000	10

Remarks

This command is only valid when the emission bandwidth measurement in GPSA mode is enabled.

Return Format

The query returns the average count in integer.

Example

The following command sets the average count to 100.
:SENSe:EBWidth:AVERage:COUNT 100

The following query returns 100.
:SENSe:EBWidth:AVERage:COUNT?

[[:SENSe]:EBWidth:AVERage[:STATe]]

Syntax

[[:SENSe]:EBWidth:AVERage[:STATe] OFF|ON|0|1
[:SENSe]:EBWidth:AVERage[:STATe]?

Description

Enables or disables the average measurement function of the emission bandwidth measurement.
Queries the status of the average measurement function of the emission bandwidth measurement.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

This command is only valid when the emission bandwidth measurement in GPSA mode is enabled.

Return Format

The query returns 0 or 1.

Example

The following command enables the average measurement function.

:SENSe:EBWidth:AVERage:STATe ON or :SENSe:EBWidth:AVERage:STATe 1

The following query returns 1.

:SENSe:EBWidth:AVERage:STATe?

[[:SENSe]:EBWidth:AVERage:TCONtrol]

Syntax

[[:SENSe]:EBWidth:AVERage:TCONtrol EXPonential|REPeat
[:SENSe]:EBWidth:AVERage:TCONtrol?

Description

Sets the average mode of the emission bandwidth measurement.
Queries the average mode of the emission bandwidth measurement.

Parameter

Name	Type	Range	Default
—	Keyword	EXPonential REPeat	EXPonential

Remarks

EXPonential: indicates the exponential average.

REPeat: indicates the repeat average.

When "EXPonential" is selected, the result is the exponential average of the measurement results obtained in the past N times (N is specified in [\[:SENSe\]:EBWidth:AVERage:COUNT](#)).

When "REPeat" is selected, the result is the arithmetic average of the measurement results obtained in the past N times (N is specified in [\[:SENSe\]:EBWidth:AVERage:COUNT](#)).

This command is only valid when the emission bandwidth measurement in GPSA mode is enabled.

Return Format

The query returns EXP or REP.

Example

The following command sets the average mode to Repeat.

```
:SENSe:EBWidth:AVERAge:TCONtrol REPeat
```

The following query returns REP.

```
:SENSe:EBWidth:AVERAge:TCONtrol?
```

[[:SENSe]:EBWidth:FREQuency:SPAN**Syntax**

```
[[:SENSe]:EBWidth:FREQuency:SPAN <freq>
```

```
[[:SENSe]:EBWidth:FREQuency:SPAN?
```

Description

Sets the span of the emission bandwidth measurement.

Queries the span of the emission bandwidth measurement.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	10 Hz to 3 GHz	2 MHz

Remarks

This command is only valid when the emission bandwidth measurement in GPSA mode is enabled.

This setting changes the span of the analyzer.

Return Format

The query returns the span in scientific notation. Its unit is Hz.

Example

The following command sets the span to 10 MHz.

```
:SENSe:EBWidth:FREQuency:SPAN 10000000
```

The following query returns 1.000000000e+07.

```
:SENSe:EBWidth:FREQuency:SPAN?
```

[[:SENSe]:EBWidth:MAXHold:STATe**Syntax**

```
[[:SENSe]:EBWidth:MAXHold:STATe OFF|ON|0|1
```

```
[[:SENSe]:EBWidth:MAXHold:STATe?
```

Description

Enables or disables the EBW Max Hold.

Queries the status of the EBW Max Hold.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

This command is only valid when the emission bandwidth measurement in GPSA mode is enabled.

When Max Hold is enabled, each measurement result is compared with the previous result, and then

display whichever is the maximum.

When Max Hold is disabled, the current measurement result is displayed.

Max Hold and average measurement are mutually exclusive. When Max Hold is enabled, the average measurement will be automatically disabled.

Return Format

The query returns 0 or 1.

Example

The following command enables the Max Hold.

```
:SENSe:EBWidth:MAXHold:STATe ON or :SENSe:EBWidth:MAXHold:STATe 1
```

The following query returns 1.

```
:SENSe:EBWidth:MAXHold:STATe?
```

[:SENSe]:EBWidth:XDB

Syntax

```
[ :SENSe]:EBWidth:XDB <real_amp>
```

```
[ :SENSe]:EBWidth:XDB?
```

Description

Sets the value of X dB for the EBW measurement.

Queries the value of X dB for the EBW measurement.

Parameter

Name	Type	Range	Default
<real_amp>	Consecutive Real Number	-100 dB to -0.1 dB	-10 dB

Remarks

This command is only valid when the emission bandwidth measurement in GPSA mode is enabled.

Return Format

The query returns the X dB value in scientific notation.

Example

The following command sets the X dB value to -20 dB.

```
:SENSe:EBWidth:XDB -20
```

The following query returns -2.000000000e+01.

```
:SENSe:EBWidth:XDB?
```

[:SENSe]:FCAPture:BLOCK

Syntax

```
[ :SENSe]:FCAPture:BLOCK <integer>
```

```
[ :SENSe]:FCAPture:BLOCK?
```

Description

Sets the IQ capture data length acquired from the instrument each time.

Queries the IQ capture data length acquired from the instrument each time.

Parameter

Name	Type	Range	Default
<integer>	Integer	0 to (131072 or set maximum capture length, whichever is smaller)	1024

Remarks

This command is only available for RTSA mode.

Return Format

The query returns the IQ capture data length acquired from the instrument each time.

Example

The following command sets the IQ capture data length acquired from the instrument each time.

```
:SENSe:FCAPture:BLOCK 100
```

The following query returns 100.

```
:SENSe:FCAPture:BLOCK?
```

[:SENSe] :FCAPture :LENGth**Syntax**

```
[ :SENSe ] :FCAPture :LENGth <integer>
```

```
[ :SENSe ] :FCAPture :LENGth?
```

Description

Sets the IQ data capture length.

Queries the IQ data capture length.

Parameter

Name	Type	Range	Default
<integer>	Integer	2 to 33554432	1048576

Remarks

This command is only available for RTSA mode.

Return Format

The query returns the IQ data capture length.

Example

The following command sets IQ data capture length to 1000.

```
:SENSe:FCAPture:LENGth 1000
```

The following query returns 1000.

```
:SENSe:FCAPture:LENGth?
```


[[:SENSe]:FCAPture:POINter

Syntax

[[:SENSe]:FCAPture:POINter <integer>
[:SENSe]:FCAPture:POINter?

Description

Sets the current position pointer of the IQ data capture.
Queries the current position pointer of the IQ data capture.

Parameter

Name	Type	Range	Default
<integer>	Integer	0 to (a value smaller than the maximum capture length)	0

Remarks

This command is only available for RTSA mode.

Return Format

The query returns the current position pointer of the IQ data capture.

Example

The following command sets the current position pointer of the IQ data capture to 100.
[:SENSe]:FCAPture:POINter 100

The following query returns 100.
[:SENSe]:FCAPture:POINter?

[[:SENSe]:FCAPture:WLENgth?

Syntax

[[:SENSe]:FCAPture:WLENgth?

Description

Queries the returned data type. For example, BIT32.

Remarks

This command is only available for RTSA mode.

[[:SENSe]:FETCh:FCAPture?

Syntax

[[:SENSe]:FETCh:FCAPture?

Description

Reads IQ capture data from the instrument.

Return Format

The query returns -230 if capture has not been launched or the captured data has been cleared. The query returns -200 if the current reading exceeds the set maximum capture length. The query returns -100 if data capture has not been completed.

Remarks

This command is only available for RTSA mode.

[[:SENSe]:INITiate:FCAPture**Syntax**

```
[[:SENSe]:INITiate:FCAPture
```

Description

Initiates the IQ capture.

Remarks

This command is only available for RTSA mode.

[[:SENSe]:FREQuency:CENTer**Syntax**

```
[[:SENSe]:FREQuency:CENTer <freq>
```

```
[[:SENSe]:FREQuency:CENTer?
```

Description

Sets the center frequency.

Queries the center frequency.

Parameter

Name	Type	Range		Default
<freq>	Consecutive Real Number	GPSA mode	0 Hz to Fmax ^[1] (zero span) 5 Hz to (Fmax - 5 Hz) (non-zero span)	Fmax/2
		RTSA mode	2.5 kHz to (Fmax - 2.5 kHz)	

Note^[1]: Fmax (maximum measurement frequency) is determined by the model of the spectrum analyzer. The maximum frequency of RSA3030E/RSA3030E-TG is 3 GHz, and the maximum frequency of RSA3015E/RSA3015E-TG is 1.5 GHz.

Return Format

The query returns the center frequency in scientific notation. The unit is Hz.

Example

The following command sets the center frequency to 1 MHz.

```
:SENSe:FREQuency:CENTer 1000000
```

The following query returns 1.000000000e+06.

```
:SENSe:FREQuency:CENTer?
```

[[:SENSe]:FREQuency:CENTer:STEP:AUTO

Syntax

[[:SENSe]:FREQuency:CENTer:STEP:AUTO OFF|ON|0|1
[:SENSe]:FREQuency:CENTer:STEP:AUTO?

Description

Enables or disables the auto setting mode of the CF step.
Queries the status of the auto setting mode of the CF step.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command enables the auto setting mode of the CF step.
:SENSe:FREQuency:CENTer:STEP:AUTO ON or :SENSe:FREQuency:CENTer:STEP:AUTO 1

The following query returns 1.
:SENSe:FREQuency:CENTer:STEP:AUTO?

[[:SENSe]:FREQuency:CENTer:STEP[:INCRement]

Syntax

[[:SENSe]:FREQuency:CENTer:STEP[:INCRement] <freq>
[:SENSe]:FREQuency:CENTer:STEP[:INCRement]?

Description

Sets the CF step.
Queries the CF step.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	-Fmax to Fmax	Fmax/10

Return Format

The query returns the center frequency step in scientific notation. The unit is Hz.

Example

The following command sets the CF step to 100 kHz.
:SENSe:FREQuency:CENTer:STEP:INCRement 100000

The following query returns 1.000000000e+05.
:SENSe:FREQuency:CENTer:STEP:INCRement?

[[:SENSe]:FREQuency:OFFSet

Syntax

```
[[:SENSe]:FREQuency:OFFSet <freq>
[:SENSe]:FREQuency:OFFSet?
```

Description

Sets the frequency offset.
Queries the frequency offset.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	-500 GHz to 500 GHz	0 Hz

Remarks

The change of this parameter only changes the display values of the center frequency, start frequency, and stop frequency; but does not affect any hardware settings of the spectrum analyzer.

Return Format

The query returns the frequency offset in scientific notation. The unit is Hz.

Example

The following command sets the frequency offset to 1 MHz.
:SENSe:FREQuency:OFFSet 1000000

The following query returns 1.000000000e+06.
:SENSe:FREQuency:OFFSet?

[[:SENSe]:FREQuency:SPAN

Syntax

```
[[:SENSe]:FREQuency:SPAN <freq>
[:SENSe]:FREQuency:SPAN?
```

Description

Sets the span.
Queries the span.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	GPSA mode ^[1] : 0 Hz, 10 Hz to Fmax	GPSA mode: Fmaxz
		RTSA mode: 5 kHz to 10 MHz	RTSA mode: 10 MHz

Note^[1]: When the span of the analyzer is set to 0 Hz, the spectrum analyzer enters the zero span mode.

Remarks

The span can be set to 0 only in GPSA mode. After the span is set to 0, the instrument enters the zero span mode; the X axis changes from frequency to time, and the instrument only displays signals whose frequency equals to the center frequency.

Return Format

The query returns the span in scientific notation. Its unit is Hz.

Example

The following command sets the span to 20 MHz.

```
:SENSe:FREQuency:SPAN 20000000
```

The following query returns 2.000000000e+07.

```
:SENSe:FREQuency:SPAN?
```

[[:SENSe]:FREQuency:SPAN:BANDwidth[:RESolution]:RATio

Syntax

```
[[:SENSe]:FREQuency:SPAN:BANDwidth[:RESolution]:RATio <integer>
```

```
[[:SENSe]:FREQuency:SPAN:BANDwidth[:RESolution]:RATio?
```

Description

Sets the ratio of span to RBW.

Queries the ratio of span to RBW.

Parameter

Name	Type	Range	Default
<integer>	Discrete	2 to 10,000	106

Remarks

This command is valid for the swept SA measurement in GPSA mode.

Return Format

The query returns the span/RBW ratio in integer.

Example

The following command sets the span/RBW ratio to 100.

```
:SENSe:FREQuency:SPAN:BANDwidth:RESolution:RATio 100
```

The following query returns 100.

```
:SENSe:FREQuency:SPAN:BANDwidth:RESolution:RATio?
```

[[:SENSe]:FREQuency:SPAN:BANDwidth[:RESolution]:RATio:AUTO

Syntax

```
[[:SENSe]:FREQuency:SPAN:BANDwidth[:RESolution]:RATio:AUTO OFF|ON|0|1
```

```
[[:SENSe]:FREQuency:SPAN:BANDwidth[:RESolution]:RATio:AUTO?
```

Description

Enables or disables the auto setting mode of span/RBW ratio.

Queries the status of the auto setting mode of span/RBW ratio.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	ON 1

Remarks

This command is valid for the swept SA measurement in GPSA mode.

Return Format

The query returns 0 or 1.

Example

The following command enables the auto setting mode of span/bandwidth ratio.

:SENSe:FREQuency:SPAN:BANDwidth:RESolution:RATio:AUTO ON

or :SENSe:FREQuency:SPAN:BANDwidth:RESolution:RATio:AUTO 1

The following query returns 1.

:SENSe:FREQuency:SPAN:BANDwidth:RESolution:RATio:AUTO?

[:SENSe]:FREQuency:SPAN:FULL**Syntax**

[:SENSe]:FREQuency:SPAN:FULL

Description

Sets the maximum span (full span).

[:SENSe]:FREQuency:SPAN:PREVious**Syntax**

[:SENSe]:FREQuency:SPAN:PREVious

Description

Sets the span to the last set value.

[:SENSe]:FREQuency:SPAN:ZERO**Syntax**

[:SENSe]:FREQuency:SPAN:ZERO

Description

Sets the span to 0 (zero span).

Remarks

This command is only available for GPSA mode.

[:SENSe]:FREQuency:STARt**Syntax**

[:SENSe]:FREQuency:STARt <freq>

[:SENSe]:FREQuency:STARt?

Description

Sets the start frequency.

Queries the start frequency.

Parameter

Name	Type	Range		Default
<freq>	Consecutive Real Number	GPSA mode	0 Hz to Fmax (zero span) 0 Hz to (Fmax - 10 Hz) (non-zero span)	center frequency-span/2
		RTSA mode	0 Hz to (Fmax - 5 kHz)	

Return Format

The query returns the start frequency in scientific notation. The unit is Hz.

Example

The following command sets the start frequency to 100 MHz.

```
:SENSe:FREQuency:STARt 100000000
```

The following query returns 1.000000000e+08.

```
:SENSe:FREQuency:STARt?
```

[[:SENSe]:FREQuency:STOP**Syntax**

```
[[:SENSe]:FREQuency:STOP <freq>
```

```
[[:SENSe]:FREQuency:STOP?
```

Description

Sets the stop frequency.

Queries the stop frequency.

Parameter

Name	Type	Range		Default
<freq>	Consecutive Real Number	GPSA mode	0 Hz to Fmax (zero span) 10 Hz to Fmax (non-zero span)	center frequency+span/2
		RTSA mode	5 kHz to Fmax	

Return Format

The query returns the stop frequency in scientific notation. The unit is Hz.

Example

The following command sets the stop frequency to 10 MHz.

```
:SENSe:FREQuency:STOP 10000000
```

The following query returns 1.000000000e+07.

```
:SENSe:FREQuency:STOP?
```

[[:SENSe]:FREQuency:TUNE:IMMediate**Syntax**

```
[[:SENSe]:FREQuency:TUNE:IMMediate
```

Description

Automatically searches for the signal within the full frequency range, and adjusts the frequency and amplitude for optimal display effect of the signal.

Remarks

This command is invalid when the advance measurement function (AMK) is enabled in GPSA mode or when in RTSA mode.

[[:SENSE]:HDIST:AVERage:COUNT**Syntax**

[[:SENSE]:HDIST:AVERage:COUNT <integer>

[[:SENSE]:HDIST:AVERage:COUNT?

Description

Sets the average count of the harmonic distortion measurement.

Queries the average count of the harmonic distortion measurement.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 1,000	10

Remarks

This command is only valid when the harmonic distortion measurement in GPSA mode is enabled.

Return Format

The query returns the average count in integer.

Example

The following command sets the average count to 100.

:SENSe:HDIST:AVERage:COUNT 100

The following query returns 100.

:SENSe:HDIST:AVERage:COUNT?

[[:SENSE]:HDIST:AVERage[:STATE]**Syntax**

[[:SENSE]:HDIST:AVERage[:STATE] OFF|ON|0|1

[[:SENSE]:HDIST:AVERage[:STATE]?

Description

Enables or disables the average measurement function of the harmonic distortion measurement.

Queries the status of the average measurement function of the harmonic distortion measurement.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

This command is only valid when the harmonic distortion measurement in GPSA mode is enabled.

Return Format

The query returns 0 or 1.

Example

The following command enables the average measurement function.

```
:SENSe:HDIST:AVERAge:STATe ON or :SENSe:HDIST:AVERAge:STATe 1
```

The following query returns 1.

```
:SENSe:HDIST:AVERAge:STATe?
```

[[:SENSe]:HDIST:AVERAge:TCONtrol]**Syntax**

```
[[:SENSe]:HDIST:AVERAge:TCONtrol EXPonential|REPeat
```

```
[[:SENSe]:HDIST:AVERAge:TCONtrol?
```

Description

Sets the average mode of the harmonic distortion measurement.

Queries the average mode of the harmonic distortion measurement.

Parameter

Name	Type	Range	Default
—	Keyword	EXPonential REPeat	EXPonential

Remarks

EXPonential: indicates the exponential average.

REPeat: indicates the repeat average.

When "EXPonential" is selected, the result is the exponential average of the measurement results obtained in the past N times (N is specified in [\[:SENSe\]:HDIST:AVERAge:COUNT](#)).

When "REPeat" is selected, the result is the arithmetic average of the measurement results obtained in the past N times (N is specified in [\[:SENSe\]:HDIST:AVERAge:COUNT](#)).

This command is only valid when the harmonic distortion measurement in GPSA mode is enabled.

Return Format

The query returns EXP or REP.

Example

The following command sets the average mode to Repeat.

```
:SENSe:HDIST:AVERAge:TCONtrol REPeat
```

The following query returns REP.

```
:SENSe:HDIST:AVERAge:TCONtrol?
```

[[:SENSe]:HDIST:NUMBers]**Syntax**

```
[[:SENSe]:HDIST:NUMBers <integer>
```

```
[[:SENSe]:HDIST:NUMBers?
```

Description

Sets the number of harmonics to be measured.

Queries the number of harmonics to be measured.

Parameter

Name	Type	Range	Default
<integer>	Integer	2 to 10	10

Remarks

This command is only valid when the harmonic distortion measurement in GPSA mode is enabled.

Return Format

The query returns the number of harmonics in integer.

Example

The following command sets the number of harmonics to 5.

```
:SENSe:HDIST:NUMBers 5
```

The following query returns 5.

```
:SENSe:HDIST:NUMBers?
```

[:SENSe]:HDIST:TIME**Syntax**

```
[ :SENSe ]:HDIST:TIME <time>
```

```
[ :SENSe ]:HDIST:TIME?
```

Description

Sets the sweep time of the harmonic distortion measurement.

Queries the sweep time of the harmonic distortion measurement.

Parameter

Name	Type	Range	Default
<time>	Consecutive Real Number	1 μ s to 6 ks	1 ms

Remarks

This command is only valid when the harmonic distortion measurement in GPSA mode is enabled.

This setting changes the sweep time of the analyzer.

Return Format

The query returns the sweep time in scientific notation. The unit is s.

Example

The following command sets the sweep time to 100 ms.

```
:SENSe:HDIST:TIME 0.1
```

The following query returns 1.000000000e-01.

```
:SENSe:HDIST:TIME?
```

[[:SENSe]:MCHPower:AVERage:COUNT

Syntax

```
[[:SENSe]:MCHPower:AVERage:COUNT <integer>
[:SENSe]:MCHPower:AVERage:COUNT?
```

Description

Sets the average count of the multi-channel power measurement.
Queries the average count of the multi-channel power measurement.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 1,000	10

Remarks

This command is only valid when the multi-channel power measurement in GPSA mode is enabled.

Return Format

The query returns the average count in integer.

Example

The following command sets the average count to 100.
:SENSe:MCHPower:AVERage:COUNT 100

The following query returns 100.
:SENSe:MCHPower:AVERage:COUNT?

[[:SENSe]:MCHPower:AVERage[:STATe]

Syntax

```
[[:SENSe]:MCHPower:AVERage[:STATe] OFF|ON|0|1
[:SENSe]:MCHPower:AVERage[:STATe]?
```

Description

Enables or disables the average measurement function of the multi-channel power measurement.
Queries the status of the average measurement function of the multi-channel power measurement.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	ON 1

Remarks

This command is only valid when the multi-channel power measurement in GPSA mode is enabled.

Return Format

The query returns 0 or 1.

Example

The following command enables the average measurement function.
:SENSe:MCHPower:AVERage:STATe ON or :SENSe:MCHPower:AVERage:STATe 1

The following query returns 1.
:SENSe:MCHPower:AVERage:STATe?

[[:SENSe]:MCHPower:AVERage:TCONtrol]

Syntax

[[:SENSe]:MCHPower:AVERage:TCONtrol EXPonential|REPeat
[:SENSe]:MCHPower:AVERage:TCONtrol?

Description

Selects the average mode of the multi-channel power measurement.
Queries the average mode of the multi-channel power measurement.

Parameter

Name	Type	Range	Default
—	Keyword	EXPonential REPeat	EXPonential

Remarks

EXPonential: indicates the exponential average.

REPeat: indicates the repeat average.

When "EXPonential" is selected, the result is the exponential average of the measurement results obtained in the past N times (N is specified in [\[:SENSe\]:MCHPower:AVERage:COUNt](#)).

When "REPeat" is selected, the result is the arithmetic average of the measurement results obtained in the past N times (N is specified in [\[:SENSe\]:MCHPower:AVERage:COUNt](#)).

This command is only valid when the multi-channel power measurement in GPSA mode is enabled.

Return Format

The query returns EXP or REP.

Example

The following command sets the average mode to Repeat.

:SENSe:MCHPower:AVERage:TCONtrol REPeat

The following query returns REP.

:SENSe:MCHPower:AVERage:TCONtrol?

[[:SENSe]:MCHPower:FREQuency:CENTer]

Syntax

[[:SENSe]:MCHPower:FREQuency:CENTer <freq>
[:SENSe]:MCHPower:FREQuency:CENTer?

Description

Sets the center frequency of the selected channel in the channel editing table.

Queries the center frequency of the selected channel in the channel editing table.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	5 Hz to 3 GHz	1.5 GHz

Remarks

This command is only valid when the multi-channel power measurement is enabled in GPSA mode.

Return Format

The query returns the center frequency of the selected channel in scientific notation. The unit is Hz.

Example

The following command sets the center frequency of the selected channel to 1 MHz.

```
:SENSe:CHPower:FREQuency:CENTer 1000000
```

The following query returns 1.000000000e+06.

```
:SENSe:CHPower:FREQuency:CENTer?
```

[[:SENSe]:MCHPower:CHAnnel:ADD**Syntax**

```
[[:SENSe]:MCHPower:CHAnnel:ADD
```

Description

Adds a channel to the channel editing table.

Remarks

This command is only valid when the multi-channel power measurement is enabled in GPSA mode.

[[:SENSe]:MCHPower:CHAnnel:DATA:NEW**Syntax**

```
[[:SENSe]:MCHPower:CHAnnel:DATA:NEW
```

```
<Freq>,<Span>[,<Freq>,<Span>][,<Freq>,<Span>][,<Freq>,<Span>][,<Freq>,<Span>][,<Freq>,<Span>][,<Freq>,<Span>][,<Freq>,<Span>][,<Freq>,<Span>][,<Freq>,<Span>][,<Freq>,<Span>][,<Freq>,<Span>]
```

Description

Creates one or multiple new channels to the channel editing table.

Parameter

Name	Type	Range	Default
<Freq>	Consecutive Real Number	0 to max. bandwidth	max. bandwidth/2
	Consecutive Real Number	0 to max. bandwidth	max. bandwidth

Remarks

<Freq>: indicates the frequency of the newly created channel.

: indicates the span of the newly created channel.

The number of newly created channels is determined by the number of pairs of <Freq> and values. One pair of <Freq> and values corresponds to one new channel. At most, 10 channels can be created.

This command is only valid when the multi-channel power measurement is enabled in GPSA mode.

Example

The following command creates two channels in the channel editing table.

```
:SENSe:MCHPower:CHAnnel:DATA:NEW 2000000,1000000,3000000,1500000
```

The two channels are as follows:

Channel 1: Center frequency 2 MHz; span 1 MHz

Channel 2: Center frequency 3 MHz; span 1.5 MHz

[:SENSe]:MCHPower:CHAnnel:DATA

Syntax

```
[:SENSe]:MCHPower:CHAnnel:DATA
```

```
<Freq>,<Span>[,<Freq>,<Span>][,<Freq>,<Span>][,<Freq>,<Span>][,<Freq>,<Span>][,<Freq>,<Span>][,<Freq>,<Span>][,<Freq>,<Span>][,<Freq>,<Span>][,<Freq>,<Span>][,<Freq>,<Span>][,<Freq>,<Span>]
```

Description

Inserts one or multiple channels to the channel editing table.

Parameter

Name	Type	Range	Default
<Freq>	Consecutive Real Number	0 to max. bandwidth	max. bandwidth/2
	Consecutive Real Number	0 to max. bandwidth	max. bandwidth

Remarks

<Freq>: indicates the frequency of the inserted channel.

: indicates the span of the inserted channel.

The number of the inserted channels is determined by the number of pairs of <Freq> and values. One pair of <Freq> and values corresponds to one new channel. The sum of the number of inserted channels and that of the existing channels cannot exceed 10.

This command is only valid when the multi-channel power measurement is enabled in GPSA mode.

Example

The following command inserts two channels into the channel editing table.

```
:SENSe:MCHPower:CHAnnel:DATA 2000000,1000000,3000000,1500000
```

Channel 1: Center frequency 2 MHz; span 1 MHz

Channel 2: Center frequency 3 MHz; span 1.5 MHz

[:SENSe]:MCHPower:CHAnnel:DATA?

Syntax

```
[:SENSe]:MCHPower:CHAnnel:DATA? <n>
```

```
[:SENSe]:MCHPower:CHAnnel:DATA?
```

Description

Queries the center frequency and span of the specified channel.

Queries the center frequency and span values of all the channels.

Parameter

Name	Type	Range	Default
<n>	Integer	1 to 10	-

Remarks

<n> indicates the specified channel to be queried.

This command is only valid when the multi-channel power measurement is enabled in GPSA mode.

Return Format

The query returns the center frequency and span of the specified channel in scientific notation.

The query returns the center frequency and span of all the channels in scientific notation.

Example

The following command queries the center frequency and span of Channel 2 in scientific notation.

:SENSe:MCHPower:CHAnnel:DATA? 2

The query returns 3.25e+09,6.5e+09.

The following command queries the center frequency and span of all of the six channels in scientific notation.

:SENSe:MCHPower:CHAnnel:DATA?

The query returns

3.25e+09,6.5e+09,3.25e+09,6.5e+09,3.25e+09,6.5e+09,3.25e+09,6.5e+09,3.25e+09,6.5e+09,3.25e+09,6.5e+09.

[:SENSe]:MCHPower:CHAnnel:DELeTe

Syntax

[:SENSe]:MCHPower:CHAnnel:DELeTe <n>

[:SENSe]:MCHPower:CHAnnel:DELeTe

Description

Deletes the data of the specified channel from the channel editing table.

Deletes the data of the currently selected channel from the channel editing table.

Parameter

Name	Type	Range	Default
<n>	Integer	1 to 10	-

Remarks

<n> indicates the specified channel whose data are to be deleted.

This command is only valid when the multi-channel power measurement is enabled in GPSA mode.

Example

The following command deletes data of Channel 2 from the channel editing table.

:SENSe:MCHPower:CHAnnel:DELeTe 2

The following command deletes the data of the currently selected channel from the channel editing table.

[:SENSe]:MCHPower:CHAnnel:DELeTe:ALL

Syntax

[:SENSe]:MCHPower:CHAnnel:DELeTe:ALL

Description

Deletes data of all channels from the channel editing table.

Remarks

This command is only valid when the multi-channel power measurement is enabled in GPSA mode.

[:SENSe]:MCHPower:CHAnnel:RESult?

Syntax

[:SENSe]:MCHPower:CHAnnel:RESult? <n>

[[:SENSe]:MCHPower:CHAnnel:RESult?

Description

Queries the test results of the specified channel.

Queries the test results of all the channels.

Parameter

Name	Type	Range	Default
<n>	Integer	1 to 10	-

Remarks

<n> indicates the specified channel to be queried.

This command is only valid when the multi-channel power measurement is enabled in GPSA mode.

Example

The following command queries the test results of Channel 2 in scientific notation.

:SENSe:MCHPower:CHAnnel:RESult? 2

The query returns -5.142665000e+01.

The following command queries the test results of all the channels in scientific notation.

:SENSe:MCHPower:CHAnnel:RESult?

The query returns -5.150423000e+01,-5.173441000e+01,-5.142665000e+01,-5.150423000e+01,-5.173441000e+01,-5.142665000e+01.

[[:SENSe]:MCHPower:FREQuency:SPAN

Syntax

[[:SENSe]:MCHPower:FREQuency:SPAN <freq>

[[:SENSe]:MCHPower:FREQuency:SPAN?

Description

Sets the channel span of the multi-channel power measurement.

Queries the channel span of the multi-channel power measurement.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	10 Hz to 2*Min[(CF - start frequency), (stop frequency - CF)]	3 GHz

Remarks

This command is only valid when the multi-channel power measurement is enabled in GPSA mode.

Return Format

The query returns the channel span in scientific notation. Its unit is Hz.

Example

The following command sets the channel span to 1 MHz.

:SENSe:MCHPower:FREQuency:SPAN 1000000

The following query returns 1.0000000000e+06.

:SENSe:MCHPower:FREQuency:SPAN

[[:SENSe]:MCHPower:SHEet

Syntax

[[:SENSe]:MCHPower:SHEet OFF|ON|0|1
[[:SENSe]:MCHPower:SHEet?

Description

Opens or closes the channel editing table.
Queries the status of the channel editing table.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	OFF 0

Remarks

This command is only valid when the multi-channel power measurement is enabled in GPSA mode.

Return Format

The query returns 0 or 1.

Example

The following command enables the channel editing table.
:SENSe:MCHPower:SHEet ON or :SENSe:MCHPower:SHEet 1

The following query returns 1.
:SENSe:MCHPower:SHEet?

[[:SENSe]:OBWidth:AVERage:COUNT

Syntax

[[:SENSe]:OBWidth:AVERage:COUNT <integer>
[[:SENSe]:OBWidth:AVERage:COUNT?

Description

Sets the average count of the occupied bandwidth measurement.
Queries the average count of the occupied bandwidth measurement.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 1,000	10

Remarks

This command is only valid when the occupied bandwidth measurement in GPSA mode is enabled.

Return Format

The query returns the average count in integer.

Example

The following command sets the average count to 100.
:SENSe:OBWidth:AVERage:COUNT 100

The following query returns 100.
:SENSe:OBWidth:AVERage:COUNT?

[[:SENSe]:OBWidth:AVERage[:STATe]

Syntax

[[:SENSe]:OBWidth:AVERage[:STATe] OFF|ON|0|1
[:SENSe]:OBWidth:AVERage[:STATe]?

Description

Enables or disables the average measurement function of the occupied bandwidth measurement.
Queries the status of the average measurement function of the occupied bandwidth measurement.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	ON 1

Remarks

This command is only valid when the occupied bandwidth measurement in GPSA mode is enabled.

Return Format

The query returns 0 or 1.

Example

The following command enables the average measurement function.

:SENSe:OBWidth:AVERage:STATe ON or :SENSe:ACPower:AVERage:STATe 1

The following query returns 1.

:SENSe:OBWidth:AVERage:STATe?

[[:SENSe]:OBWidth:AVERage:TCONtrol

Syntax

[[:SENSe]:OBWidth:AVERage:TCONtrol EXPonential|REPeat
[:SENSe]:OBWidth:AVERage:TCONtrol?

Description

Selects the average mode of the occupied bandwidth measurement.
Queries the average mode of the occupied bandwidth measurement.

Parameter

Name	Type	Range	Default
—	Keyword	EXPonential REPeat	EXPonential

Remarks

EXPonential: indicates the exponential average.

REPeat: indicates the repeat average.

When "EXPonential" is selected, the result is the exponential average of the measurement results obtained in the past N times (N is specified in [\[:SENSe\]:OBWidth:AVERage:COUNT](#)).

When "REPeat" is selected, the result is the arithmetic average of the measurement results obtained in the past N times (N is specified in [\[:SENSe\]:OBWidth:AVERage:COUNT](#)).

This command is only valid when the occupied bandwidth measurement in GPSA mode is enabled.

Return Format

The query returns EXP or REP.

Example

The following command sets the average mode to Repeat.

```
:SENSe:OBWidth:AVERAge:TCONtrol REPeat
```

The following query returns REP.

```
:SENSe:OBWidth:AVERAge:TCONtrol?
```

[[:SENSe]:OBWidth:FREQuency:SPAN**Syntax**

```
[[:SENSe]:OBWidth:FREQuency:SPAN <freq>
```

```
[[:SENSe]:OBWidth:FREQuency:SPAN?
```

Description

Sets the span of the occupied bandwidth measurement.

Queries the span of the occupied bandwidth measurement.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	10 Hz to 3 GHz	2 MHz

Remarks

This command is only valid when the occupied bandwidth measurement in GPSA mode is enabled.

This setting changes the span of the analyzer.

Return Format

The query returns the span in scientific notation. The unit is Hz.

Example

The following command sets the span to 1 MHz.

```
:SENSe:OBWidth:FREQuency:SPAN 1000000
```

The following query returns 1.000000000e+06.

```
:SENSe:OBWidth:FREQuency:SPAN?
```

[[:SENSe]:OBWidth:MAXHold:STATe**Syntax**

```
[[:SENSe]:OBWidth:MAXHold:STATe OFF|ON|0|1
```

```
[[:SENSe]:OBWidth:MAXHold:STATe?
```

Description

Enables or disables Max Hold of the occupied bandwidth measurement.

Queries the Max Hold state of the occupied bandwidth measurement.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

This command is only valid when the occupied bandwidth measurement in GPSA mode is enabled.
 When Max Hold is enabled, each measurement result is compared with the previous result, and then display whichever is the maximum.
 When Max Hold is disabled, the current measurement result is displayed.
 Max Hold and average measurement mode are mutually exclusive. When Max Hold is enabled, the average measurement mode will be automatically disabled.

Return Format

The query returns 0 or 1.

Example

The following command enables the Max Hold.
 :SENSe:OBWidth:MAXHold:STATe ON or :SENSe:OBWidth:MAXHold:STATe 1

The following query returns 1.
 :SENSe:OBWidth:MAXHold:STATe?

[:SENSe]:OBWidth:PERCent**Syntax**

[:SENSe]:OBWidth:PERCent <real>
 [:SENSe]:OBWidth:PERCent?

Description

Sets the percentage the signal power takes up in the whole span power (power ratio).
 Queries the power ratio of the occupied bandwidth measurement.

Parameter

Name	Type	Range	Default
<real>	Consecutive Real Number	1 to 99.99	99

Remarks

This command is only valid when the occupied bandwidth measurement in GPSA mode is enabled.
 The range of <real> is from 1 to 99.99. Therefore, set the range of the corresponding parameter for the analyzer to "1%-99.99%".

Return Format

The query returns the percentage in scientific notation.

Example

The following command sets the power ratio to 90%.
 :SENSe:OBWidth:PERCent 90

The following query returns 9.000000000e+01.
 :SENSe:OBWidth:PERCent?

[:SENSe]:POWer[:RF]:ATTenuation**Syntax**

[:SENSe]:POWer[:RF]:ATTenuation <real>
 [:SENSe]:POWer[:RF]:ATTenuation?

Description

Sets the attenuation of the RF front-end attenuator.

Queries the attenuation of the RF front-end attenuator.

Parameter

Name	Type	Range	Default
<real>	Integer	0 dB to 50 dB	10 dB

Return Format

The query returns the attenuation in integer. The unit is dB.

Example

The following command sets the attenuation to 20 dB.

```
:SENSe:POWer:RF:ATTenuation 20
```

The following query returns 20.

```
:SENSe:POWer:RF:ATTenuation?
```

[:SENSe]:POWer[:RF]:ATTenuation:AUTO**Syntax**

```
[ :SENSe ]:POWer[ :RF ]:ATTenuation:AUTO OFF|ON|0|1
```

```
[ :SENSe ]:POWer[ :RF ]:ATTenuation:AUTO?
```

Description

Enables or disables the auto setting mode of the input attenuation.

Queries the status of the auto setting mode of the input attenuation.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command disables the auto setting mode of the input attenuation.

```
:SENSe:POWer:RF:ATTenuation:AUTO OFF or :SENSe:POWer:RF:ATTenuation:AUTO 0
```

The following query returns 0.

```
:SENSe:POWer:RF:ATTenuation:AUTO?
```

[:SENSe]:POWer[:RF]:GAIN[:STATe]**Syntax**

```
[ :SENSe ]:POWer[ :RF ]:GAIN[ :STATe ] OFF|ON|0|1
```

```
[ :SENSe ]:POWer[ :RF ]:GAIN[ :STATe ]?
```

Description

Enable or disable the preamplifier.

Queries the status of the preamplifier.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command enables the preamplifier.

:SENSe:POWer:RF:GAIN:STATe ON or :SENSe:POWer:RF:GAIN:STATe 1

The following query returns 1.

:SENSe:POWer:RF:GAIN:STATe?

[[:SENSe]:POWer[:RF]:MIXer:RANGe[:UPPer]**Syntax**

[[:SENSe]:POWer[:RF]:MIXer:RANGe[:UPPer] <ampl>

[[:SENSe]:POWer[:RF]:MIXer:RANGe[:UPPer]?

Description

Sets the maximum power of the input mixer.

Queries the maximum power of the input mixer.

Parameter

Name	Type	Range	Default
<ampl>	Consecutive Real Number	-50 dBm to -10 dBm	-10 dBm

Return Format

The query returns the maximum power of the input mixer in scientific notation. The unit is dBm.

Example

The following command sets the maximum power of the input mixer to -20 dBm.

:SENSe:POWer:RF:MIXer:RANGe:UPPer -20

The following query returns -2.000000000e+01.

:SENSe:POWer:RF:MIXer:RANGe:UPPer?

[[:SENSe]:SIGCapture:2FSK:AMPDown**Syntax**

[[:SENSe]:SIGCapture:2FSK:AMPDown <ample>

[[:SENSe]:SIGCapture:2FSK:AMPDown?

Description

Sets the lower limit of the amplitude of 2FSK signal.

Queries the lower limit of the amplitude of 2FSK signal.

Parameter

Name	Type	Range	Default
<ample>	Consecutive Real Number	-400 dBm to amplitude upper limit	-100 dBm

Remarks

This command is only available for RTSA mode and valid when the SSC function is enabled.

Return Format

The query returns the amplitude lower limit in scientific notation.

Example

The following command sets the amplitude lower limit to -20 dBm.

```
:SENSe:SIGCapture:2FSK:AMPDown -20
```

The following query returns -2.000000000e+01.

```
:SENSe:SIGCapture:2FSK:AMPDown?
```

[[:SENSe]:SIGCapture:2FSK:AMPUp**Syntax**

```
[[:SENSe]:SIGCapture:2FSK:AMPUp <ample>
```

```
[[:SENSe]:SIGCapture:2FSK:AMPUp?
```

Description

Sets the upper limit of the amplitude of 2FSK signal.

Queries the upper limit of the amplitude of 2FSK signal.

Parameter

Name	Type	Range	Default
<ample>	Consecutive Real Number	-100 dBm to 320 dBm	-10 dBm

Remarks

This command is only available for RTSA mode and valid when the SSC function is enabled.

Return Format

The query returns the amplitude upper limit in scientific notation.

Example

The following command sets the amplitude upper limit to -20 dBm.

```
:SENSe:SIGCapture:2FSK:AMPUp -20
```

The following query returns -2.000000000e+01.

```
:SENSe:SIGCapture:2FSK:AMPUp?
```

[[:SENSe]:SIGCapture:2FSK:MARK1:FREQ**Syntax**

```
[[:SENSe]:SIGCapture:2FSK:MARK1:FREQ <freq>
```

```
[[:SENSe]:SIGCapture:2FSK:MARK1:FREQ?
```

Description

Sets the frequency value at Marker 1.

Queries the frequency value at Marker 1.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	(start frequency) to (stop frequency)	Start Frequency

Remarks

This command is only available for RTSA mode and valid when the SSC function is enabled.

Return Format

The query returns the frequency value of Marker 1 in scientific notation. The unit is Hz.

Example

The following command sets the frequency value at Marker 1 to 1 MHz.

```
:SENSe:SIGCapture:2FSK:MARK1:FREQ 1000000
```

The following query returns 1.000000000e+06.

```
:SENSe:SIGCapture:2FSK:MARK1:FREQ?
```

[:SENSe]:SIGCapture:2FSK:MARK1:SWitch[:STATe]**Syntax**

```
[ :SENSe ]:SIGCapture:2FSK:MARK1:SWitch[:STATe] OFF|ON|0|1
```

```
[ :SENSe ]:SIGCapture:2FSK:MARK1:SWitch[:STATe]?
```

Description

Enables or disables Mark 1.

Queries the on/off status of Marker 1.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	OFF 0

Remarks

This command is only available for RTSA mode and valid when the SSC function is enabled.

Return Format

The query returns 0 or 1.

Example

The following command enables Marker 1.

```
:SENSe:SIGCapture:2FSK:MARK1:SWitch:STATe ON or :SENSe:SIGCapture:2FSK:MARK1:SWitch:STATe 1
```

The following query returns 1.

```
:SENSe:SIGCapture:2FSK:MARK1:SWitch:STATe?
```

[:SENSe]:SIGCapture:2FSK:MARK2:FREQ**Syntax**

```
[ :SENSe ]:SIGCapture:2FSK:MARK2:FREQ <freq>
```

```
[ :SENSe ]:SIGCapture:2FSK:MARK2:FREQ?
```


Description

Sets the frequency value at Marker 2.
Queries the frequency value at Marker 2.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	(start frequency) to (stop frequency)	Stop Frequency

Remarks

This command is only available for RTSA mode and valid when the SSC function is enabled.

Return Format

The query returns the frequency value of Marker 2 in integer. The unit is Hz.

Example

The following command sets the frequency value at Marker 2 to 1 MHz.

```
:SENSe:SIGCapture:2FSK:MARK2:FREQ 1000000
```

The following query returns 1000000.

```
:SENSe:SIGCapture:2FSK:MARK2:FREQ?
```

[:SENSe]:SIGCapture:2FSK:MARK2:SWitch[:STATe]**Syntax**

```
[ :SENSe ]:SIGCapture:2FSK:MARK2:SWitch[:STATe] OFF|ON|0|1
```

```
[ :SENSe ]:SIGCapture:2FSK:MARK2:SWitch[:STATe]?
```

Description

Enables or disables Mark 2.
Queries the on/off status of Marker 2.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	OFF 0

Remarks

This command is only available for RTSA mode and valid when the SSC function is enabled.

Return Format

The query returns 0 or 1.

Example

The following command enables Marker 2.

```
:SENSe:SIGCapture:2FSK:MARK2:SWitch:STATe ON or :SENSe:SIGCapture:2FSK:MARK2:SWitch:STATe 1
```

The following query returns 1.

```
:SENSe:SIGCapture:2FSK:MARK2:SWitch:STATe?
```

[[:SENSe]:SIGCapture:2FSK:MAXHold[:STATe]**Syntax**

[[:SENSe]:SIGCapture:2FSK:MAXHold[:STATe] OFF|ON|0|1
[:SENSe]:SIGCapture:2FSK:MAXHold[:STATe]?

Description

Enables or disables the Max Hold.
Queries the on/off status of the Max Hold.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	OFF 0

Remarks

When the Max Hold is enabled (i.g. the SSC function is enabled), the signal captured each time will be compared with the last captured signal, whichever the larger value will be displayed as the max hold trace.

Return Format

The query returns 0 or 1.

Example

The following command enables the Max Hold.

:SENSe:SIGCapture:2FSK:MAXHold:STATe ON or :SENSe:SIGCapture:2FSK:MAXHold:STATe 1

The following query returns 1.

:SENSe:SIGCapture:2FSK:MAXHold:STATe?

[[:SENSe]:SIGCapture:2FSK:PEAKAmp?**Syntax**

[[:SENSe]:SIGCapture:2FSK:PEAKAmp? <peaknum>

Description

Queries the amplitude of the nth peak in the SSC measurement results.

Parameter

Name	Type	Range	Default
<peaknum>	Integer	1 to 6	1

Remarks

This command is only available for RTSA mode and valid when the SSC function is enabled.

Return Format

The query returns the amplitude of the nth peak (i.g. the value of the parameter <peaknum>) in scientific notation.

Example

The following command queries the amplitude of the nth peak in the SSC measurement results, and returns 1.960000000e+01.

:SENSe:SIGCapture:2FSK:PEAKAmp? 1

[[:SENSe]:SIGCapture:2FSK:PEAKFreq?**Syntax**

```
[[:SENSe]:SIGCapture:2FSK:PEAKFreq? <peaknum>
```

Description

Queries the frequency of the nth peak in the SSC measurement results.

Parameter

Name	Type	Range	Default
<peaknum>	Integer	1 to 6	1

Remarks

This command is only available for RTSA mode and valid when the SSC function is enabled.

Return Format

The query returns the frequency of the nth peak (i.g. the value of the parameter <peaknum>) in scientific notation.

Example

The following command queries the frequency of the 1st peak in the SSC measurement results, and returns 1.000000000e+09.

```
:SENSe:SIGCapture:2FSK:PEAKFreq? 1
```

[[:SENSe]:SIGCapture:2FSK:PF?**Syntax**

```
[[:SENSe]:SIGCapture:2FSK:PF?
```

Description

Queries the test result of the Pass/Fail function.

Remarks

This command is only available for RTSA mode and valid when the SSC function is enabled.

Return Format

The query returns PASS or FAIL.

Example

The following query returns PASS.

```
:SENSe:SIGCapture:2FSK:PF?
```

[[:SENSe]:SIGCapture:2FSK:PFSWitch[:STATe]**Syntax**

```
[[:SENSe]:SIGCapture:2FSK:PFSWitch[:STATe] OFF|ON|0|1  
[:SENSe]:SIGCapture:2FSK:PFSWitch[:STATe]?
```

Description

Enables or disables the Pass/Fail function.

Queries the on/off status of the Pass/Fail function.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	OFF 0

Remarks

This command is only available for RTSA mode and valid when the SSC function is enabled.

Return Format

The query returns 0 or 1.

Example

The following command enables the the Pass/Fail function.

:SENSe:SIGCapture:2FSK:PFSWitch:STATe ON or :SENSe:SIGCapture:2FSK:PFSWitch:STATe 1

The following query returns 1.

:SENSe:SIGCapture:2FSK:PFSWitch:STATe?

[:SENSe]:SIGCapture:2FSK:RESet**Syntax**

[:SENSe]:SIGCapture:2FSK:RESet

Description

Performs the reset operation, deletes the original signal, and restarts to capture the signal.

Remarks

This command is only available for RTSA mode and valid when the SSC function is enabled.

[:SENSe]:SIGCapture:2FSK:SIGNal**Syntax**

[:SENSe]:SIGCapture:2FSK:SIGNal 0|1|2

[:SENSe]:SIGCapture:2FSK:SIGNal?

Description

Selects the signal whose Limit value is required to be modified in the pass/fail test.

Queries the signal whose Limit value is required to be modified in the pass/fail test.

Parameter

Name	Type	Range	Default
--	Discrete	0 1 2	0

Remarks

0: selects to modify Signal 1.

1: selects to modify Signal 2.

2: selects to modify Signal 3.

This command is only available for RTSA mode and valid when the SSC function is enabled.

Return Format

The query returns 0, 1, or 2.

Example

The following command selects to modify Signal 1.

:SENSe:SIGCapture:2FSK:SIGNal 0
 The following query returns 0.
 :SENSe:SIGCapture:2FSK:SIGNal?

[[:SENSe]:SWEep:POINts

Syntax

[[:SENSe]:SWEep:POINts <integer>
 [[:SENSe]:SWEep:POINts?

Description

Sets the number of sweep points.
 Queries the number of sweep points.

Parameter

Name	Type	Range	Default
<integer>	Integer	101 to 10,001	801

Remarks

This command is only available for GPSA mode.

Return Format

The query returns the number of sweep points in integer.

Example

The following command sets the number of sweep points to 650.
 :SENSe:SWEep:POINts 650

The following query returns 650.
 :SENSe:SWEep:POINts?

[[:SENSe]:SWEep:TIME

Syntax

[[:SENSe]:SWEep:TIME <time>
 [[:SENSe]:SWEep:TIME?

Description

Sets the sweep time.
 Queries the sweep time.

Parameter

Name	Type	Range	Default
<time>	Consecutive Real Number	1 ms to 4,000 s (non-zero span) 1 μ s to 6,000 s (zero span)	1 ms

Remarks

This command is only available for GPSA mode.

Return Format

The query returns the sweep time in scientific notation. The unit is s.

Example

The following command sets the sweep time to 100 ms.

:SENSe:SWEEp:TIME 0.1

The following query returns 1.000000000e-01.

:SENSe:SWEEp:TIME?

[:SENSe]:SWEEp:TIME:AUTO**Syntax**

[:SENSe]:SWEEp:TIME:AUTO OFF|ON|0|1

[:SENSe]:SWEEp:TIME:AUTO?

Description

Enables or disables auto sweep time.

Queries the status of the auto sweep time.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	ON 1

Remarks

This command is only available for GPSA mode.

Return Format

The query returns 0 or 1.

Example

The following command enables the auto sweep time.

:SENSe:SWEEp:TIME:AUTO ON or :SENSe:SWEEp:TIME:AUTO 1

The following query returns 1.

:SENSe:SWEEp:TIME:AUTO?

[:SENSe]:SWEEp:TIME:AUTO:RULEs**Syntax**

[:SENSe]:SWEEp:TIME:AUTO:RULEs NORMal|ACCuracy

[:SENSe]:SWEEp:TIME:AUTO:RULEs?

Description

Selects the sweep type.

Queries the sweep type.

Parameter

Name	Type	Range	Default
—	Keyword	NORMal ACCuracy	NORMal

Remarks

NORMal: indicates normal.

ACCuracy: indicates accuracy.

This command is only available for GPSA mode

Return Format

The query returns NORM or ACC.

Example

The following command selects the sweep type to Accuracy.

```
:SENSe:SWEep:TIME:AUTO:RULEs ACCuracy
```

The following query returns ACC.

```
:SENSe:SWEep:TIME:AUTO:RULEs?
```

[[:SENSe]:TOI:AVERage:COUNT**Syntax**

```
[[:SENSe]:TOI:AVERage:COUNT <integer>
```

```
[[:SENSe]:TOI:AVERage:COUNT?
```

Description

Sets the average count of the TOI measurement.

Queries the average count of the TOI measurement.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 1,000	10

Remarks

This command is only valid when the TOI measurement in GPSA mode is enabled.

Return Format

The query returns the average count in integer.

Example

The following command sets the average count to 100.

```
:SENSe:TOI:AVERage:COUNT 100
```

The following query returns 100.

```
:SENSe:TOI:AVERage:COUNT?
```

[[:SENSe]:TOI:AVERage[:STATe]**Syntax**

```
[[:SENSe]:TOI:AVERage[:STATe] OFF|ON|0|1
```

```
[[:SENSe]:TOI:AVERage[:STATe]?
```

Description

Enables or disables the average measurement function of the TOI measurement.

Queries the status of the average measurement function of the TOI measurement.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	ON 1

Remarks

This command is only valid when the TOI measurement in GPSA mode is enabled.

Return Format

The query returns 0 or 1.

Example

The following command enables the average measurement function.

```
:SENSe:TOI:AVERAge:STATe ON or :SENSe:TOI:AVERAge:STATe 1
```

The following query returns 1.

```
:SENSe:TOI:AVERAge:STATe?
```

[[:SENSe]:TOI:AVERAge:TCONtrol]**Syntax**

```
[[:SENSe]:TOI:AVERAge:TCONtrol EXPonential|REPeat
```

```
[[:SENSe]:TOI:AVERAge:TCONtrol?
```

Description

Selects the average mode of the TOI measurement.

Queries the average mode of the TOI measurement.

Parameter

Name	Type	Range	Default
—	Keyword	EXPonential REPeat	EXPonential

Remarks

EXPonential: indicates the exponential average.

REPeat: indicates the repeat average.

When "EXPonential" is selected, the result is the exponential average of the measurement results obtained in the past N times (N is specified in [\[:SENSe\]:TOI:AVERAge:COUNT](#)).

When "REPeat" is selected, the result is the arithmetic average of the measurement results obtained in the past N times (N is specified in [\[:SENSe\]:TOI:AVERAge:COUNT](#)).

This command is only valid when the TOI measurement in GPSA mode is enabled.

Return Format

The query returns EXP or REP.

Example

The following command sets the average mode to Repeat.

```
:SENSe:TOI:AVERAge:TCONtrol REPeat
```

The following query returns REP.

```
:SENSe:TOI:AVERAge:TCONtrol?
```

[[:SENSe]:TOI:FREQuency:SPAN]**Syntax**

```
[[:SENSe]:TOI:FREQuency:SPAN <freq>
```

```
[[:SENSe]:TOI:FREQuency:SPAN?
```


Description

Sets the span of the TOI measurement.

Queries the span of the TOI measurement.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	10 Hz to 3 GHz	2 MHz

Remarks

This command is only valid when the TOI measurement in GPSA mode is enabled.

This setting will change the span of the analyzer.

Return Format

The query returns the span in scientific notation. The unit is Hz.

Example

The following command sets the span to 1 MHz.

```
:SENSe:TOI:FREQuency:SPAN 1000000
```

The following query returns 1.000000000e+06.

```
:SENSe:TOI:FREQuency:SPAN?
```

[:SENSe]:TPOWer:AVERage:COUNT**Syntax**

```
[ :SENSe ]:TPOWer:AVERage:COUNT <integer>
```

```
[ :SENSe ]:TPOWer:AVERage:COUNT?
```

Description

Sets the average count of the T-power measurement.

Queries the average count of the T-power measurement.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 1,000	10

Remarks

This command is only valid when the T-power measurement in GPSA mode is enabled.

Return Format

The query returns the average count in integer.

Example

The following command sets the average count to 100.

```
:SENSe:TPOWer:AVERage:COUNT 100
```

The following query returns 100.

```
:SENSe:TPOWer:AVERage:COUNT?
```

[[:SENSe]:TPOWer:AVERage[:STATe]

Syntax

[[:SENSe]:TPOWer:AVERage[:STATe] OFF|ON|0|1
[:SENSe]:TPOWer:AVERage[:STATe]?

Description

Enables or disables the average measurement function of the T-power measurement.
Queries the status of the average measurement function of the T-power measurement.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

This command is only valid when the T-power measurement in GPSA mode is enabled.

Return Format

The query returns 0 or 1.

Example

The following command enables the average measurement.

:SENSe:TPOWer:AVERage:STATe ON or :SENSe:TPOWer:AVERage:STATe 1

The following query returns 1.

:SENSe:TPOWer:AVERage:STATe?

[[:SENSe]:TPOWer:AVERage:TCONtrol

Syntax

[[:SENSe]:TPOWer:AVERage:TCONtrol EXPOnential|REPeat
[:SENSe]:TPOWer:AVERage:TCONtrol?

Description

Sets the average mode of the T-power measurement.
Queries the average mode of the T-power measurement.

Parameter

Name	Type	Range	Default
—	Keyword	EXPOnential REPeat	EXPOnential

Remarks

EXPOnential: indicates the exponential average.

REPeat: indicates the repeat average.

When "EXPOnential" is selected, the result is the exponential average of the measurement results obtained in the past N times (N is specified in "[\[:SENSe\]:TPOWer:AVERage:COUNt](#)").

When "REPeat" is selected, the result is the arithmetic average of the measurement results obtained in the past N times (N is specified in "[\[:SENSe\]:TPOWer:AVERage:COUNt](#)").

This command is only valid when the T-power measurement in GPSA mode is enabled.

Return Format

The query returns EXP or REP.

Example

The following command sets the average mode to Repeat.

```
:SENSe:TPOWer:AVERage:TCONtrol REPeat
```

The following query returns REP.

```
:SENSe:TPOWer:AVERage:TCONtrol?
```

[[:SENSe]:TPOWer:LLIMit**Syntax**

```
[[:SENSe]:TPOWer:LLIMit <time>
```

```
[[:SENSe]:TPOWer:LLIMit?
```

Description

Sets the start line for the T-power measurement.

Queries the start line for the T-power measurement.

Parameter

Name	Type	Range	Default
<time>	Consecutive Real Number	0 μ s to (current value of stop line)	0 μ s

Remarks

This command is only valid when the T-power measurement in GPSA mode is enabled.

Return Format

The query returns the start line in scientific notation. The unit is s.

Example

The following command sets the start line to 5 ms.

```
:SENSe:TPOWer:LLIMit 0.005
```

The following query returns 5.000000000e-03.

```
:SENSe:TPOWer:LLIMit?
```

[[:SENSe]:TPOWer:MODE**Syntax**

```
[[:SENSe]:TPOWer:MODE AVERage|PEAK|RMS
```

```
[[:SENSe]:TPOWer:MODE?
```

Description

Sets the power type for the T-power measurement.

Queries the power type for the T-power measurement.

Parameter

Name	Type	Range	Default
—	Keyword	AVERage PEAK RMS	PEAK

Remarks

AVERage: indicates average power.

PEAK: indicates peak power.

RMS: indicates the RMS power.

This command is only valid when the T-power measurement in GPSA mode is enabled.

Return Format

The query returns AVER, PEAK, or RMS.

Example

The following command sets the power type to Average.

```
:SENSe:TPOWer:MODE AVERage
```

The following query returns AVER.

```
:SENSe:TPOWer:MODE?
```

[[:SENSe]:TPOWer:RLIMit**Syntax**

```
[[:SENSe]:TPOWer:RLIMit <time>
```

```
[[:SENSe]:TPOWer:RLIMit?
```

Description

Sets the stop line for the T-power measurement.

Queries the stop line for the T-power measurement.

Parameter

Name	Type	Range	Default
<time>	Consecutive Real Number	current value of start line to current value of sweep time	1 ms

Remarks

This command is only valid when the T-power measurement in GPSA mode is enabled.

Return Format

The query returns the stop line in scientific notation. The unit is s.

Example

The following command sets the stop line to 10 ms.

```
:SENSe:TPOWer:RLIMit 0.01
```

The following query returns 1.000000000e-02.

```
:SENSe:TPOWer:RLIMit?
```

[[:SENSe]:VSWR:FREFlect**Syntax**

```
[[:SENSe]:VSWR:FREFlect
```

Description

When you send this command, the analyzer performs the first measurement for VSWR measurement (disconnect the DUT).

Remarks

This command is only valid when the VSWR measurement is enabled in GPSA mode.

Before sending this command, disconnect the DUT.

[[:SENSe]:VSWR:NREFlect

Syntax

[[:SENSe]:VSWR:NREFlect

Description

When you send this command, the analyzer performs the second measurement for VSWR measurement.

Remarks

This command is only valid when the VSWR measurement is enabled in GPSA mode.

Before sending this command, disconnect the DUT and send the [\[:SENSe\]:VSWR:FREFlect](#) command, and then connect the DUT.

[[:SENSe]:VSWR:RESet

Syntax

[[:SENSe]:VSWR:RESet

Description

Resets the VSWR measurement parameters to their default values.

Remarks

This command is only valid when the VSWR measurement is enabled in GPSA mode.

[[:SENSe]:VSWR:STATe

Syntax

[[:SENSe]:VSWR:STATe OFF|ON|0|1

[[:SENSe]:VSWR:STATe?

Description

Enables or disables the VSWR measurement function.

Queries the status of the VSWR measurement function.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

This command is only valid when the VSWR measurement is enabled in GPSA mode.

Return Format

The query returns 0 or 1.

Example

The following command enables the VSWR measurement function.

:SENSe:VSWR:STATe ON or :SENSe:VSWR:STATe 1

The following query returns 1.

:SENSe:VSWR:STATe?

:SOURce Commands

Command List:

- ◆ [:SOURce:CORRection:OFFSet](#)
- ◆ [:SOURce\[:EXTErnal\]:POWEr\[:LEVel\]\[:IMMediate\]\[:AMPLitude\]](#)
- ◆ [:SOURce:TRACe:REFerence:STATe](#)
- ◆ [:SOURce:TRACe:STORref](#)

Remarks:

The :SOURce commands are only available for RSA3030E-TG/RSA3015E-TG working in GPSA mode.

:SOURce:CORRection:OFFSet

Syntax

```
:SOURce:CORRection:OFFSet <rel_ampl>
:SOURce:CORRection:OFFSet?
```

Description

Sets the offset of the output amplitude of the tracking generator.
Queries the offset of the output amplitude of the tracking generator.

Parameter

Name	Type	Range	Default
<rel_ampl>	Consecutive Real Number	-200 dB to 200 dB	0 dB

Return Format

The query returns the offset in scientific notation.
This parameter only changes the readout of the tracking generator output power, but does not affect the actual output power.

Example

The following command sets the offset to 10 dB.
:SOURce:CORRection:OFFSet 10

The following query returns 1.000000000e+01.
:SOURce:CORRection:OFFSet?

:SOURce[:EXTErnal]:POWEr[:LEVel][:IMMediate][:AMPLitude]

Syntax

```
:SOURce[:EXTErnal]:POWEr[:LEVel][:IMMediate][:AMPLitude] <ampl>
:SOURce[:EXTErnal]:POWEr[:LEVel][:IMMediate][:AMPLitude]?
```

Description

Sets the output amplitude of the tracking generator.
Queries the output amplitude of the tracking generator.

Parameter

Name	Type	Range	Default
<ampl>	Consecutive Real Number	-40 dBm to 0 dBm	-40 dBm

Return Format

The query returns the output amplitude in scientific notation.

Example

The following command sets the output amplitude to -10 dB.

```
:SOURce:EXtErnal:POWeR:LEVel:IMMediate:AMPLitude -10
```

The following query returns -1.000000000e+01.

```
:SOURce:EXtErnal:POWeR:LEVel:IMMediate:AMPLitude?
```

:SOURce:TRACe:REFerence:STATe**Syntax**

```
:SOURce:TRACe:REFerence:STATe OFF|ON|0|1
```

```
:SOURce:TRACe:REFerence:STATe?
```

Description

Sets whether to display the reference trace of normalization.

Queries whether to display the reference trace of normalization.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

This command is only valid when the tracking generator function is enabled.

Return Format

The query returns 0 or 1.

Example

The following command enables the reference trace.

```
:SOURce:TRACe:REF:STATe ON or :SOURce:TRACe:REF:STATe 1
```

The following query returns 1.

```
:SOURce:TRACe:REF:STATe?
```

:SOURce:TRACe:STORref**Syntax**

```
:SOURce:TRACe:STORref
```

Description


Saves the reference trace of normalization.

Remarks

This command is only valid when the tracking generator function is enabled.

:STATus Commands

The :STATus commands and [IEEE 488.2 Common Commands](#) are used to operate or query the status registers. The structure of the status register is shown in the following figure. The STATus commands are used to set and query the questionable status register and operation status register. IEEE488.2 common commands can be used to operate on the standard event status register and status byte register.

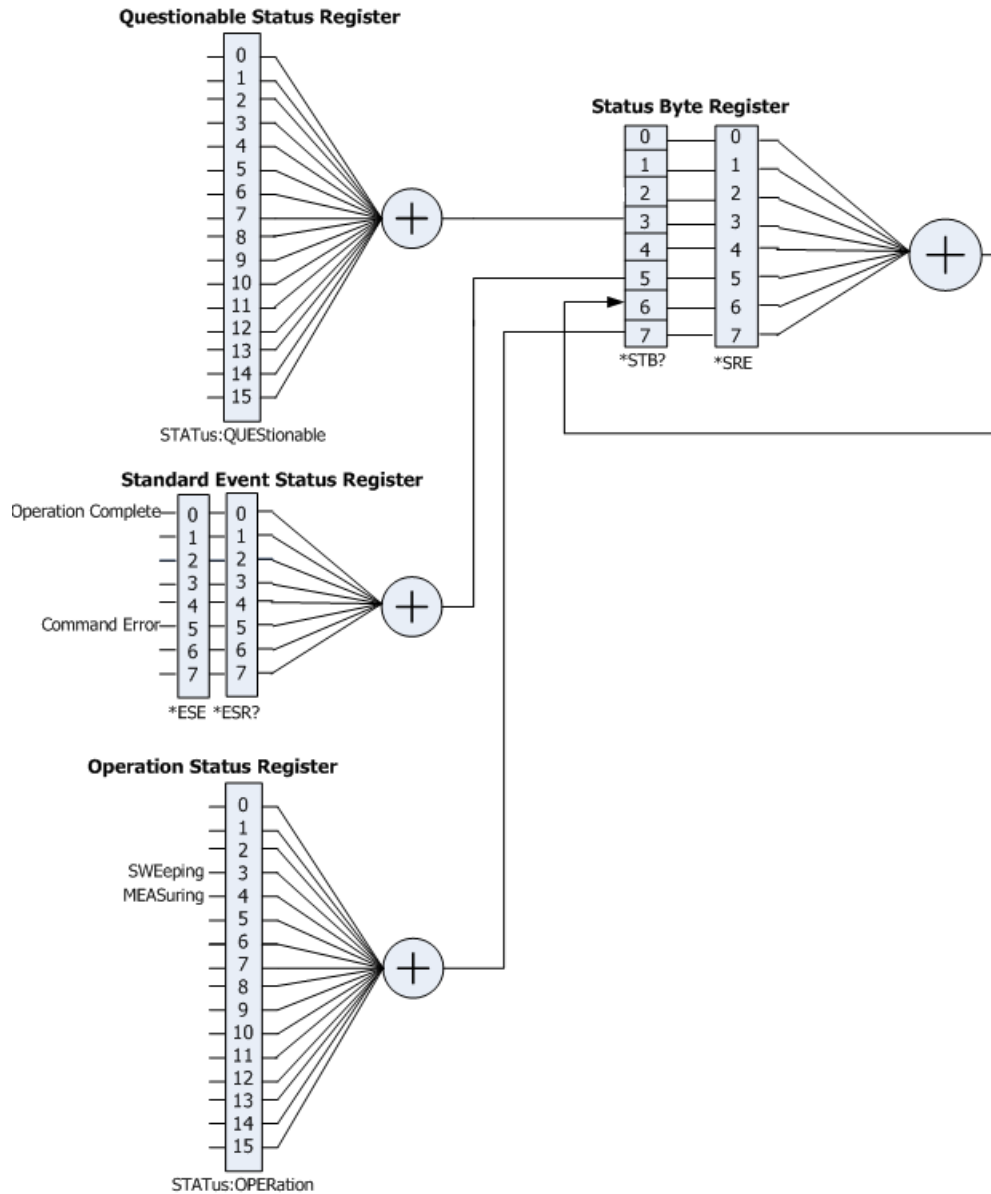

Command List:

- ◆ [:STATus:OPERation:CONDition?](#)
- ◆ [:STATus:OPERation:ENABLE](#)
- ◆ [:STATus:OPERation\[:EVENT\]?](#)
- ◆ [:STATus:PRESet](#)
- ◆ [:STATus:QUESTIONable:CONDition?](#)
- ◆ [:STATus:QUESTIONable:ENABLE](#)
- ◆ [:STATus:QUESTIONable\[:EVENT\]?](#)

:STATus:OPERation:CONDition?

Syntax

:STATus:OPERation:CONDition?

Description

Queries the condition register of the Operation Status Register.

Return Format

The query returns the condition register in integer. For example, 24.

:STATus:OPERation:ENABLE

Syntax

:STATus:OPERation:ENABLE <integer>

:STATus:OPERation:ENABLE?

Description

Sets the enable register of the Operation Status Register.

Queries the enable register of the Operation Status Register.

Parameter

Name	Type	Range	Default
<integer>	Integer	Refer to " Remarks "	0

Remarks

The following table lists the bit definitions for the operation status register. The bit 0 to bit 2, bit 5 to bit 7, bit 13 and bit 14 are reserved; they can be set but will not affect the instrument. The bit 15 and bit 12 to bit 8 are not used and are always treated as 0; therefore, the range of <integer> are the decimal numbers corresponding to the binary numbers ranging from 0000000000000000 (0 in decimal) to 1111111111111111 (32767 in decimal) and of which the bit 15 and bit 12 to bit 8 are 0.

Bit	Value	Definition
0	1	Reserved
1	2	Reserved
2	4	Reserved
3	8	SWEEping
4	16	MEASuring
5	32	Reserved
6	64	Reserved
7	128	Reserved
8	0	Not Used
9	0	Not Used
10	0	Not Used
11	0	Not Used
12	0	Not Used
13	8192	Reserved
14	16384	Reserved
15	0	Not Used

Return Format

The query returns the enable register of the Operation Status Register in integer.

Example

The following command sets the enable register of the Operation Status Register to 100.

:STATus:OPERation:ENABle 100

The following query returns 100.

:STATus:OPERation:ENABle?

:STATus:OPERation[:EVENT]?**Syntax**

:STATus:OPERation[:EVENT]?

Description

Queries the event register of the Operation Status Register.

Return Format

The query returns the event register of the Operation Status Register in integer. For example, 24.

:STATus:PRESet**Syntax**

:STATus:PRESet

Description

Clears the enable register of the Operation Status Register and Questionable Status Register.

:STATus:QUEStionable:CONDition?**Syntax**

:STATus:QUEStionable:CONDition?

Description

Queries the condition register of the Questionable Status Register.

Return Format

The query returns the condition register of the Questionable Status Register in integer. For example, 0.

:STATus:QUEStionable:ENABle**Syntax**

:STATus:QUEStionable:ENABle <integer>

:STATus:QUEStionable:ENABle?

Description

Sets the enable register of the Questionable Status Register.

Queries the enable register of the Questionable Status Register.

Parameter

Name	Type	Range	Default
<integer>	Integer	Refer to " Remarks "	0

Remarks

The following table lists the bit definitions for the questionable status register. The bit 0 to bit 8, bit 13 and bit 14 are reserved; they can be set but will not affect the instrument. The bit 15 and bit 12 to bit 9 are not used and are always treated as 0; therefore, the range of <integer> are the decimal numbers corresponding to the binary numbers ranging from 0000000000000000 (0 in decimal) to 1111111111111111 (32767 in decimal) and of which the bit 15 and bit 12 to bit 9 are 0.

Bit	Value	Definition
0	1	Reserved
1	2	Reserved
2	4	Reserved
3	8	Reserved
4	16	Reserved
5	32	Reserved
6	64	Reserved
7	128	Reserved
8	256	Reserved
9	0	Not Used
10	0	Not Used
11	0	Not Used
12	0	Not Used
13	8192	Reserved
14	16384	Reserved
15	0	Not Used

Return Format

The query returns the enable register of the Questionable Status Register in integer.

Example

The following command sets the enable register of the Questionable Status Register to 100.

```
:STATus:QUESTionable:ENABLE 100
```

The following query returns 100.

```
:STATus:QUESTionable:ENABLE?
```

:STATus:QUESTionable[:EVENT]?**Syntax**

```
:STATus:QUESTionable[:EVENT]?
```

Description

Queries the event register of the Questionable Status Register.

Return Format

Queries the event register of the Questionable Status Register in integer. For example, 0.

:SYSTem Commands

Command List:

- ◆ [:SYSTem:BEEPer:STATe](#)
- ◆ [:SYSTem:COMMUnicate:LAN\[:SELF\]:APPLy](#)
- ◆ [:SYSTem:COMMUnicate:LAN\[:SELF\]:AUTOp:STATe](#)
- ◆ [:SYSTem:COMMUnicate:LAN\[:SELF\]:DHCP:STATe](#)
- ◆ [:SYSTem:COMMUnicate:LAN\[:SELF\]:IP:ADDReSS](#)
- ◆ [:SYSTem:COMMUnicate:LAN\[:SELF\]:IP:DNS:AUTO\[:STATe\]](#)
- ◆ [:SYSTem:COMMUnicate:LAN\[:SELF\]:IP:DNSBack](#)
- ◆ [:SYSTem:COMMUnicate:LAN\[:SELF\]:IP:DNSPreferred](#)
- ◆ [:SYSTem:COMMUnicate:LAN\[:SELF\]:IP:DNSServer](#)
- ◆ [:SYSTem:COMMUnicate:LAN\[:SELF\]:IP:GATeway](#)
- ◆ [:SYSTem:COMMUnicate:LAN\[:SELF\]:IP:SUBMask](#)
- ◆ [:SYSTem:COMMUnicate:LAN\[:SELF\]:MANuip:STATe](#)
- ◆ [:SYSTem:COMMUnicate:LAN\[:SELF\]:MDNS:STATe](#)
- ◆ [:SYSTem:COMMUnicate:LAN\[:SELF\]:RESet](#)
- ◆ [:SYSTem:CONFIgure:INFormation?](#)
- ◆ [:SYSTem:DATE](#)
- ◆ [:SYSTem:FSWitch\[:STATe\]](#)
- ◆ [:SYSTem:LANGuage](#)
- ◆ [:SYSTem:LKEY](#)
- ◆ [:SYSTem:OPTion:STATe?](#)
- ◆ [:SYSTem:PON:TYPE](#)
- ◆ [:SYSTem:PRESet](#)
- ◆ [:SYSTem:PRESet:SAVE](#)
- ◆ [:SYSTem:PRESet:TYPE](#)
- ◆ [:SYSTem:PRESet:USER:SAVE](#)
- ◆ [:SYSTem:SCPI:DISPlay](#)
- ◆ [:SYSTem:SECurity:CLEar](#)
- ◆ [:SYSTem:SHOW](#)
- ◆ [:SYSTem:TIME](#)

:SYSTem:BEEPer:STATe

Syntax

:SYSTem:BEEPer:STATe OFF|ON|0|1

:SYSTem:BEEPer:STATe?

Description

Turns on or off the beeper.

Queries the status of the beeper.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command turns on the beeper.

:SYSTem:BEEPer:STATe ON or :SYSTem:BEEPer:STATe 1

The following query returns 1.

:SYSTem:BEEPer:STATe?

:SYSTem:COMMunicate:LAN[:SELF]:APPLy

Syntax

:SYSTem:COMMunicate:LAN[:SELF]:APPLy

Description

Applies the LAN interface parameter settings.

:SYSTem:COMMunicate:LAN[:SELF]:AUTOip:STATe

Syntax

:SYSTem:COMMunicate:LAN[:SELF]:AUTOip:STATe OFF|ON|0|1

:SYSTem:COMMunicate:LAN[:SELF]:AUTOip:STATe?

Description

Enables or disables the auto IP setting mode.

Queries the status of the auto IP setting mode.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

The analyzer attempts to acquire the IP address configuration according to the sequence of DHCP, Auto IP, and Manual IP. These three modes cannot be disabled at the same time.

ON|1: enables the auto IP mode.

OFF|0: disables the auto IP mode and selects DHCP configuration mode.

Return Format

The query returns 0 or 1.

Example

The following command enables the auto IP setting mode.

:SYSTem:COMMunicate:LAN:SELF:AUTOip:STATe ON or :SYSTem:COMMunicate:LAN:SELF:AUTOip:STATe 1

The following query returns 1.

:SYSTem:COMMunicate:LAN:SELF:AUTOip:STATe?

:SYSTem:COMMunicate:LAN[:SELF]:DHCP:STATe**Syntax**

:SYSTem:COMMunicate:LAN[:SELF]:DHCP:STATe OFF|ON|0|1

:SYSTem:COMMunicate:LAN[:SELF]:DHCP:STATe?

Description

Enables or disables the DHCP configuration mode.

Queries the status of the DHCP configuration mode.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	ON 1

Remarks

The analyzer attempts to acquire the IP address configuration according to the sequence of DHCP, Auto IP, and Manual IP. These three modes cannot be disabled at the same time.

ON|1: enables the DHCP configuration mode.

OFF|0: disables the DHCP configuration mode and selects the auto IP mode.

Return Format

The query returns 0 or 1.

Example

The following command enables the DHCP configuration mode.

:SYSTem:COMMunicate:LAN:SELF:DHCP:STATe ON or :SYSTem:COMMunicate:LAN:SELF:DHCP:STATe 1

The following query returns 1.

:SYSTem:COMMunicate:LAN:SELF:DHCP:STATe?

:SYSTem:COMMunicate:LAN[:SELF]:IP:ADDRESS**Syntax**

:SYSTem:COMMunicate:LAN[:SELF]:IP:ADDRESS <ip_address>

:SYSTem:COMMunicate:LAN[:SELF]:IP:ADDRESS?

Description

Sets the IP address.

Queries the IP address.

Parameter

Name	Type	Range	Default
<ip_address>	ASCII String	Refer to "Remarks"	—

Remarks

The format of <ip_address> is "nnn.nnn.nnn.nnn". The range for the first segment (nnn) of the address is from 1 to 223 (except 127); and the range for the other three segments is from 0 to 255. This command is only valid in manual IP setting mode.

Return Format

The query returns the current IP address in the format of "nnn.nnn.nnn.nnn".

Example

The following command sets the IP address to "172.16.3.199".

```
:SYSTem:COMMunicate:LAN:SELF:IP:ADDRes 172.16.3.199
```

The following query returns 172.16.3.199.

```
:SYSTem:COMMunicate:LAN:SELF:IP:ADDRes?
```

:SYSTem:COMMunicate:LAN[:SELF]:IP:DNS:AUTO[:STATe]**Syntax**

```
:SYSTem:COMMunicate:LAN[:SELF]:IP:DNS:AUTO[:STATe] OFF|ON|0|1
```

```
:SYSTem:COMMunicate:LAN[:SELF]:IP:DNS:AUTO[:STATe]?
```

Description

Sets the mode to obtain the DNS.

Queries the mode to obtain the DNS.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

ON|1: enables the auto mode of DNS, that is, selects the auto mode.

OFF|0: disables the auto mode of DNS, that is, selects the manual mode.

Return Format

The query returns 0 or 1.

Example

The following command enables the auto mode of DNS.

```
:SYSTem:COMMunicate:LAN:SELF:IP:DNS:AUTO:STATe ON
```

```
or :SYSTem:COMMunicate:LAN:SELF:IP:DNS:AUTO:STATe 1
```

The following query returns 1.

```
:SYSTem:COMMunicate:LAN:SELF:IP:DNS:AUTO:STATe?
```

:SYSTem:COMMunicate:LAN[:SELF]:IP:DNSBack**Syntax**

```
:SYSTem:COMMunicate:LAN[:SELF]:IP:DNSBack <ip_address>
```

```
:SYSTem:COMMunicate:LAN[:SELF]:IP:DNSBack?
```

Description

Sets the backup address for the DNS.

Queries the backup address for the DNS.

Parameter

Name	Type	Range	Default
<ip_address>	ASCII String	Refer to " Remarks "	—

Remarks

The format of <ip_address> is "nnn.nnn.nnn.nnn". The range for the first segment (nnn) of the address is from 1 to 223 (except 127); and the range for the other three segments is from 0 to 255. This command is only valid in manual DNS setting mode.

Return Format

The query returns the current backup DNS address in the format of "nnn.nnn.nnn.nnn".

Example

The following command sets the backup address of DNS to "172.16.2.2".
:SYSTem:COMMunicate:LAN:SELF:IP:DNSBack 172.16.2.2

The following query returns 172.16.2.2.
:SYSTem:COMMunicate:LAN:SELF:IP:DNSBack?

**:SYSTem:COMMunicate:LAN[:SELF]:IP:DNSPreferred
:SYSTem:COMMunicate:LAN[:SELF]:IP:DNSServer****Syntax**

:SYSTem:COMMunicate:LAN[:SELF]:IP:DNSPreferred <ip_address>
:SYSTem:COMMunicate:LAN[:SELF]:IP:DNSPreferred?
:SYSTem:COMMunicate:LAN[:SELF]:IP:DNSServer <ip_address>
:SYSTem:COMMunicate:LAN[:SELF]:IP:DNSServer?

Description

Sets the preferred address for the DNS.
Queries the preferred address for the DNS.

Parameter

Name	Type	Range	Default
<ip_address>	ASCII String	Refer to " Remarks "	—

Remarks

The format of <ip_address> is "nnn.nnn.nnn.nnn". The range for the first segment (nnn) of the address is from 1 to 223 (except 127); and the range for the other three segments is from 0 to 255. This command is only valid in manual DNS setting mode.

Return Format

The query returns the currently preferred DNS address in the format of "nnn.nnn.nnn.nnn".

Example

The following command sets the preferred DNS address to "172.16.2.2".
:SYSTem:COMMunicate:LAN:SELF:IP:DNSPreferred 172.16.2.2
:SYSTem:COMMunicate:LAN:SELF:IP:DNSServer 172.16.2.2

The following query returns 172.16.2.2.
:SYSTem:COMMunicate:LAN:SELF:IP:DNSPreferred?
:SYSTem:COMMunicate:LAN:SELF:IP:DNSServer?

:SYSTem:COMMunicate:LAN[:SELF]:IP:GATeway

Syntax

```
:SYSTem:COMMunicate:LAN[:SELF]:IP:GATeway <ip_address>
:SYSTem:COMMunicate:LAN[:SELF]:IP:GATeway?
```

Description

Sets the default gateway.
Queries the default gateway.

Parameter

Name	Type	Range	Default
<ip_address>	ASCII String	Refer to " Remarks "	—

Remarks

The format of <ip_address> is "nnn.nnn.nnn.nnn". The range for the first segment (nnn) of the address is from 1 to 223 (except 127); and the range for the other three segments is from 0 to 255.
This command is only valid in manual IP setting mode.

Return Format

The query returns the current default gateway in the format of "nnn.nnn.nnn.nnn".

Example

The following command sets the default gateway to "172.16.3.1".
:SYSTem:COMMunicate:LAN:SELF:IP:GATeway 172.16.3.1

The following query returns 172.16.3.1.
:SYSTem:COMMunicate:LAN:SELF:IP:GATeway?

:SYSTem:COMMunicate:LAN[:SELF]:IP:SUBMask

Syntax

```
:SYSTem:COMMunicate:LAN[:SELF]:IP:SUBMask<ip_address>
:SYSTem:COMMunicate:LAN[:SELF]:IP:SUBMask?
```

Description

Sets the subnet mask.
Queries the subnet mask.

Parameter

Name	Type	Range	Default
<ip_address>	ASCII String	Refer to " Remarks "	—

Remarks

The format of <ip_address> is "nnn.nnn.nnn.nnn". The range for the first segment (nnn) is from 0 to 255.
This command is only valid in manual IP setting mode.

Return Format

The query returns the current subnet mask in the format of "nnn.nnn.nnn.nnn".

Example

The following command sets the subnet mask to "255.255.255.0".
:SYSTem:COMMunicate:LAN:SELF:IP:SUBMask 255.255.255.0

The following query returns 255.255.255.0.
:SYSTem:COMMunicate:LAN:SELF:IP:SUBMask?

:SYSTem:COMMunicate:LAN[:SELF]:MANuip:STATe

Syntax

:SYSTem:COMMunicate:LAN[:SELF]:MANuip:STATe OFF|ON|0|1
:SYSTem:COMMunicate:LAN[:SELF]:MANuip:STATe?

Description

Enables or disables the manual IP setting mode.
Queries the status of the manual IP setting mode.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

The analyzer attempts to acquire the IP address configuration according to the sequence of DHCP, Auto IP, and Manual IP. These three modes cannot be disabled at the same time.
ON|1: enables the manual IP mode.
OFF|0: disables the manual IP mode and selects the DHCP mode.

Return Format

The query returns 0 or 1.

Example

The following command enables the manual IP setting mode.
:SYSTem:COMMunicate:LAN:SELF:MANuip:STATe ON or :SYSTem:COMMunicate:LAN:SELF:MANuip:STATe 1

The following query returns 1.
:SYSTem:COMMunicate:LAN:SELF:MANuip:STATe?

:SYSTem:COMMunicate:LAN[:SELF]:MDNS:STATe

Syntax

:SYSTem:COMMunicate:LAN[:SELF]:MDNS:STATe OFF|ON|0|1
:SYSTem:COMMunicate:LAN[:SELF]:MDNS:STATe?

Description

Enables or disables the state of the network information sending.
Queries the on/off status of the network information sending.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

ON|1: The state of the network information sending is turned on.
ON|0: The state of the network information sending is turned off.

Return Format

The query returns 0 or 1.

Example

The following command sets the state of the network information sending to "on".

:SYSTem:COMMunicate:LAN:SELF:MDNS:STATe ON or :SYSTem:COMMunicate:LAN:SELF:MDNS:STATe 1

The following query returns 1.

:SYSTem:COMMunicate:LAN:SELF:MDNS:STATe?

:SYSTem:COMMunicate:LAN[:SELF]:RESet**Syntax**

:SYSTem:COMMunicate:LAN[:SELF]:RESet

Description

Resets the LAN setting: enable the DHCP, disable Auto IP and the Manual IP.

:SYSTem:CONFigure:INFormation?**Syntax**

:SYSTem:CONFigure:INFormation?

Description

Queries the system information of the spectrum analyzer.

Remarks

The system information includes the model, serial number, software and hardware version number, and firmware version number.

Return Format

The query returns the system information. For example,

Model:RSA3030E

SN:RSA3A200100001

Main Board:00.01.00

Keyboard:00.01.00

CPU:00.01.00

SPU:00.01.02

WPU:00.01.00

BOOT:00.01.00

OS:00.01.00

Firmware:00.01.00

Note: When you use RSA3030E-TG/RSA3015E-TG, the query also returns information about "TG Board".

:SYSTem:DATE**Syntax**

:SYSTem:DATE <year>,<month>,<day>

:SYSTem:DATE?

Description

Sets the date of the instrument.

Queries the date of the instrument.

Parameter

Name	Type	Range	Default
<year>	ASCII String	2000 to 2099	—
<month>	ASCII String	01 to 12	—
<day>	ASCII String	01 to 31	—

Return Format

The query returns the current date in the format of "YYYY,MM,DD".

Example

The following command sets the date of the instrument to 2017/11/16.

```
:SYSTem:DATE 2017,11,16
```

The following query returns 2017,11,16

```
:SYSTem:DATE?
```

:SYSTem:FSWitch[:STATe]**Syntax**

```
:SYSTem:FSWitch[:STATe] OFF|ON|0|1
```

```
:SYSTem:FSWitch[:STATe]?
```

Description

Sets the power switch on the front panel to be turned on or off.

Queries whether the power switch on the front panel is turned on or off.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command sets the power switch on the front panel is turned off.

```
:SYSTem:FSWitch:STATe OFF or :SYSTem:FSWitch:STATe 0
```

The following query returns 0.

```
:SYSTem:FSWitch:STATe?
```

:SYSTem:LANGuage**Syntax**

```
:SYSTem:LANGuage ENGLISH|CHINEse
```

```
:SYSTem:LANGuage?
```

Description

Sets the language of the instrument.

Queries the language of the instrument.

Parameter

Name	Type	Range	Default
—	Keyword	ENGLISH CHINESE	ENGLISH

Return Format

The query returns ENGL or CHIN.

Example

The following command sets the language to English.

```
:SYSTEM:LANGUAGE ENGLISH
```

The following query returns ENGL.

```
:SYSTEM:LANGUAGE?
```

:SYSTEM:LKEY

Syntax

```
:SYSTEM:LKEY <option info>@<license info>
```

Description

Installs and activates the specified option.

Parameter

Name	Type	Range	Default
<option info>	ASCII String	—	—
<license info>	ASCII String	—	—

Remarks

The parameter <option info> indicates the order number of the option. <license info> indicates the serial number of the option.

Example

The following command installs the option RSA3000E-PA.

```
:SYSTEM:LKEY RSA3000E-
```

```
PA@8AD12B8EBC5DF492D1D4289B7CBA5B6150BF6F5D752D645C36D74530B05F39B49C461B23A50D6C  
94A34E06782AC4380070B0D1A86BA84E02768391FFD70C2103
```

:SYSTEM:OPTION:STATE?

Syntax

```
:SYSTEM:OPTION:STATE? <option name>
```

Description

Queries whether an option is activated or not.

Parameter

Name	Type	Range	Default
<option name>	ASCII String	—	—

Return Format

The query returns 0 (not activated) or 1 (activated).

Example

The following command queries whether the option RSA3000E-PA is activated.

:SYSTem:OPTion:STATe? RSA3000E-PA

:SYSTem:PON:TYPE**Syntax**

:SYSTem:PON:TYPE PRESet|LAST

:SYSTem:PON:TYPE?

Description

Selects the setting type the instrument recalls at power-on.

Queries what setting type the instrument recalls at power-on.

Parameter

Name	Type	Range	Default
—	Keyword	PRESet LAST	PRESet

Remarks

PRESet: indicates preset settings, which includes default factory settings and 6 user settings.

LAST: indicates the last setting.

Return Format

The query returns PRES or LAST.

Example

The following command sets the instrument to recall the last setting.

:SYSTem:PON:TYPE LAST

The following query returns LAST.

:SYSTem:PON:TYPE?

:SYSTem:PRESet**Syntax**

:SYSTem:PRESet

Description

Recalls the system's preset settings, and recovers the system to the state specified by the [:SYSTem:PRESet:TYPE](#) command.

:SYSTem:PRESet:SAVE**Syntax**

:SYSTem:PRESet:SAVE USER1|USER2|USER3|USER4|USER5|USER6

Description

Saves the specified user setting.

Parameter

Name	Type	Range	Default
—	Keyword	USER1 USER2 USER3 USER4 USER5 USER6	—

:SYSTem:PRESet:TYPE**Syntax**

:SYSTem:PRESet:TYPE FACTory|USER1|USER2|USER3|USER4|USER5|USER6

:SYSTem:PRESet:TYPE?

Description

Selects the preset type of the system to FACTory or any one of the items from User1 to User6. Queries the preset type of the system.

Parameter

Name	Type	Range	Default
—	Keyword	FACTory USER1 USER2 USER3 USER4 USER5 USER6	FACTory

Return Format

The query returns FACT, USER1, USER2, USER3, USER4, USER5, or USER6.

Example

The following command sets the preset type of the system to User5.

```
:SYSTem:PRESet:TYPE USER5
```

The following query returns USER5.

```
:SYSTem:PRESet:TYPE?
```

:SYSTem:PRESet:USER:SAVE**Syntax**

```
:SYSTem:PRESet:USER:SAVE
```

Description

Saves the current user setting.

Remarks

If the current preset type is "FACTory", save the current user setting to User1. If the current preset type is "User1 through User6", save the current user setting to the specified user.

:SYSTem:SCPI:DISPlay**Syntax**

```
:SYSTem:SCPI:DISPlay OFF|ON|0|1
```

```
:SYSTem:SCPI:DISPlay?
```

Description

Enables or disables the SCPI display.
Queries the status for the SCPI display.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

When you use the SCPI commands to control the instrument remotely, turning on the SCPI display will go to the specified menu of the corresponding command; turning off the SCPI Display will not go to the specified menu.

Return Format

The query returns 0 or 1.

Example

The following command enables the SCPI display.
:SYSTem:SCPI:DISPlay 1 or :SYSTem:SCPI:DISPlay ON

The following query returns 1.
:SYSTem:SCPI:DISPlay?

:SYSTem:SECurity:CLEar**Syntax**

:SYSTem:SECurity:CLEar

Description

Clears all the data that you set safely.

Remarks

Deletes all the files that you have saved, deletes all the configuration files, and executes the factory resetting operation.

:SYSTem:SHOW**Syntax**

:SYSTem:SHOW OFF|SYSTem|OPTion|LICense
:SYSTem:SHOW?

Description

Displays the system-related information.
Queries the system-related information.

Parameter

Name	Type	Range	Default
—	Keyword	OFF SYSTem OPTion LICense	OFF

Remarks

OFF: turns off the system information display.
SYSTem: displays the system information.

OPTion: displays the option information.
LICense: displays the registration information.

Return Format

The query returns OFF, SYST, OPT, or LIC.

Example

The following command displays the system information.
:SYSTem:SHOW SYSTem

The following query returns SYST.
:SYSTem:SHOW?

:SYSTem:TIME**Syntax**

:SYSTem:TIME <hour>,<minute>,<second>
:SYSTem:TIME?

Description

Sets the system time of the instrument.
Queries the system time of the instrument.

Parameter

Name	Type	Range	Default
<hour>	ASCII String	00 to 23	—
<minute>	ASCII String	00 to 59	—
<second>	ASCII String	00 to 59	—

Return Format

The query returns the current system time in the format of "HH,MM,SS".

Example

The following command sets the system time to "15:10:30".
:SYSTem:TIME 15,10,30

The following query returns 15,10,30.
:SYSTem:TIME?

:TRACe Commands

Command List:

- ◆ [:TRACe:CLEAr:ALL](#)
- ◆ [:TRACe\[:DATA\]](#)
- ◆ [:TRACe:MATH:A](#)
- ◆ [:TRACe:MATH:B](#)
- ◆ [:TRACe:MATH:CONSt](#)
- ◆ [:TRACe:MATH:PEAK\[:DATA\]?](#)
- ◆ [:TRACe:MATH:PEAK:POINts?](#)
- ◆ [:TRACe:MATH:REFerence](#)
- ◆ [:TRACe:MATH:STATe](#)
- ◆ [:TRACe:MATH:TYPE](#)
- ◆ [:TRACe:PRESet:ALL](#)
- ◆ [:TRACe<n>:DISPlay:STATe](#)
- ◆ [:TRACe<n>:MODE](#)
- ◆ [:TRACe<n>:TYPE](#)
- ◆ [:TRACe<n>:UPDate:STATe](#)

:TRACe:CLEAr:ALL

Syntax

:TRACe:CLEAr:ALL

Description

Clears all the traces, that is, all the points on the trace will be reset to the minimum value of the trace.

:TRACe[:DATA]

Syntax

:TRACe[:DATA]

TRACE1|TRACE2|TRACE3|TRACE4|TRACE5|TRACE6,<definite_length_block>|<comma_separated_ASCII_data>

:TRACe[:DATA]? TRACE1|TRACE2|TRACE3|TRACE4|TRACE5|TRACE6

Description

Load the user data into the specified trace.

Query the logarithmic data of the specified trace.

Parameter

Name	Type	Range	Default
--	Keyword	TRACE1 TRACE2 TRACE3 TRACE4 TRACE5 TRACE6	--
<definite_length_block>	ASCII String	--	--
<comma_separated_ASCII_data>	ASCII String	--	--

Explanation

1. Use the [:FORMat\[:TRACe\]\[:DATA\]](#) command to set the format of the user data.
2. `<comma_separated_ASCII_data>`:
Data block^[1]. Select this parameter when the data format is ASCII. The two neighboring data points are separated by a comma (1 byte) and a space (1 byte) and each point is expressed in scientific notation; for example, -1.390530e+01 (13 bytes). Up to 801 points can be sent.
3. `<definite_length_block>`:
Data block^[1]. Select this parameter when the data format is REAL[,32]|REAL[,64]|INTEger[,32] and each point is represented by a 32 bit (4 bytes)|64 bit (4 bytes)|32 bit (4 bytes) binary number. Up to 801 points can be sent.
Use the [:FORMat:BORDer](#) command to set the byte order of the binary data transmission.
4. When VSWR is enabled, the **:TRACe? TRACE1** command returns the reference data of the VSWR, the **:TRACe? TRACE6** command returns the trace data of the calibration currently enabled and the **:TRACe? TRACE3** (the current mathematical operation trace) command returns the difference (the return loss) between the reference data and trace data.

Return Format

The query returns the data of the specified trace. The format of the return data depends on the setting of the [:FORMAT\[:TRACe\]\[:DATA\]](#) command. The unit of the return data is determined by the Y-axis unit currently selected.

Example^[2]

1. When the data format is ASCII

The command below sends the user data to trace 1.

```
:TRACE:DATA TRACE1, -1.390530e+01, -7.108871e+01, -7.089631e+01, -6.992984e+01, -7.010770e+01, .....
```

The query below returns -1.390530e+01, -7.108871e+01, -7.089631e+01, -6.992984e+01, -7.010770e+01,

```
:TRACE:DATA? TRACE1
```

2. When the data format is REAL[,32]

The command below sends the user data to trace 2.

:TRACe:DATA

[illegible]

The query below returns


[illegible]

Note: As the PC software converts the binary data returned to ASCII character, the return value is unrecognizable code when the PC software is used to execute the query command.

```
:TRACe:DATA? TRACE2
```

Remark:

[1] The format of the data block is "Data Block Header + Data Block"; wherein, the format of the data block header is as follows.

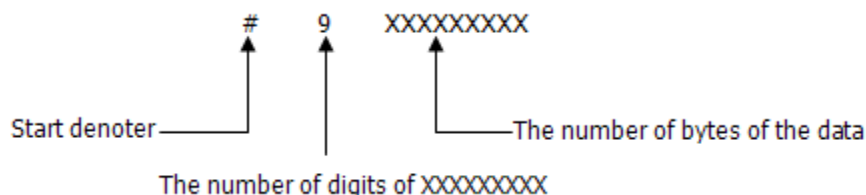

The first figure (9) following # denotes the number of digits of the number in the data block header; this number denotes the number of bytes of the data in this transmission (add 0 before the number when the number of digits is less than 9). For example, the data block header is #9000000100 when 100 bytes of data is transmitted.

[2] In the two examples here, 801 points are transmitted and the queries return 801 points. However, due to the limited space, the succeeding data is omitted here. The return values in the above examples are acquired when the trace stops sweeping.

:TRACe:MATH:A

Syntax

:TRACe:MATH:A T1|T2|T3|T4|T5|T6
:TRACe:MATH:A?

Description

Sets Op1 in the trace math operation formula to Trace 1, Trace 2, Trace 3, Trace 4, Trace 5, or Trace 6. Queries which trace is Op1 represented in the trace math operation formula.

Parameter

Name	Type	Range	Default
—	Keyword	T1 T2 T3 T4 T5 T6	T1

Return Format

The query returns T1, T2, T3, T4, T5, or T6.

Example

The following command sets Op1 to Trace 2.
:TRACe:MATH:A T2

The following query returns T2.
:TRACe:MATH:A?

:TRACe:MATH:B

Syntax

:TRACe:MATH:B T1|T2|T3|T4|T5|T6
:TRACe:MATH:B?

Description

Sets Op2 in the trace math operation formula to Trace 1, Trace 2, Trace 3, Trace 4, Trace 5, or Trace 6. Queries which trace is Op2 represented in the trace math operation formula.

Parameter

Name	Type	Range	Default
—	Keyword	T1 T2 T3 T4 T5 T6	T2

Return Format

The query returns T1, T2, T3, T4, T5, or T6.

Example

The following command sets Op2 to Trace 1.
:TRACe:MATH:B T1

The following query returns T1.
:TRACe:MATH:B?

:TRACe:MATH:CONSt

Syntax

:TRACe:MATH:CONSt <integer>

:TRACe:MATH:CONSt?

Description

Sets the log offset in the trace math operation formula.

Queries the log offset in the trace math operation formula.

Parameter

Name	Type	Range	Default
<integer>	Consecutive Real Number	-100 dB to 100 dB	0 dB

Return Format

The query returns the log offset in scientific notation.

Example

The following command sets the log offset to 50 dB.

:TRACe:MATH:CONSt 50

The following query returns 5.000000000e+01.

:TRACe:MATH:CONSt?

:TRACe:MATH:PEAK[:DATA]?

Syntax

:TRACe:MATH:PEAK[:DATA]?

Description

Queries the frequencies (Hz) and amplitudes (the unit is the same as the current Y-axis unit) of the peaks in the peak table.

Remarks

This command only queries Trace 1.

Return Format

The query returns the frequencies and amplitudes of the peaks in the peak table in the following format.

At most, 20 pairs of frequencies and amplitudes can be returned.

For example, 1.000000000e+09,-1.463000000e+01,9.999890000e+08,-4.172000000e+01.

:TRACe:MATH:PEAK:POINTs?

Syntax

:TRACe:MATH:PEAK:POINTs?

Description

Query the number of peaks in the peak table.

Return Format

The query returns an integer ranging from 0 to 20.

:TRACe:MATH:REFeRence

Syntax

:TRACe:MATH:REFeRence <integer>
:TRACe:MATH:REFeRence?

Description

Sets the log reference in the trace math operation formula.
Queries the log reference in the trace math operation formula.

Parameter

Name	Type	Range	Default
<integer>	Consecutive Real Number	-170 dBm to 30 dBm	0 dBm

Return Format

The query returns the log reference in scientific notation.

Example

The following command sets the log reference to 50 dBm.
:TRACe:MATH:REFeRence 50

The following query returns 5.000000000e+01.
:TRACe:MATH:REFeRence?

:TRACe:MATH:STATe

Syntax

:TRACe:MATH:STATe OFF|ON|0|1
:TRACe:MATH:STATe?

Description

Enables or disables the math operation.
Queries the status of the math operation of the trace.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command enables the math operation of the trace.
:TRACe:MATH:STATe 1 or :TRACe:MATH:STATe ON

The following query returns 1.
:TRACe:MATH:STATe?

:TRACe:MATH:TYPE

Syntax

:TRACe:MATH:TYPE A+B|A-B|A+CONST|A-CONST|A-B+REF

:TRACe:MATH:TYPE?

Description

Sets the operation type of the trace.

Queries the operation type of the trace.

Parameter

Name	Type	Range	Default
—	Keyword	A+B A-B A+CONST A-CONST A-B+REF	A+B

Remarks

The parameter A+B, A-B, A+CONST, A-CONST, and A-B+REF corresponds to Op1-Op2, Op1+Op2, Op1+Offset, Op1-Offset, and Op1-Op2+Ref, respectively

Return Format

The query returns A+B, A-B, A+CONST, A-CONST, or A-B+REF.

Example

The following command sets the operation type of the trace to A+B.

```
:TRACe:MATH:TYPE A+B
```

The following query returns A+B.

```
:TRACe:MATH:TYPE?
```

:TRACe:PRESet:ALL

Syntax

:TRACe:PRESet:ALL

Description

Resets all the traces.

Remarks

Enables Trace 1, and sets other traces to be in blank state. This does not affect the trace type and the detector type.

:TRACe<n>:DISPlay:STATe

Syntax

```
:TRACe<n>:DISPlay[:STATe] OFF|ON|0|1
:TRACe<n>:DISPlay[:STATe]?
```

Description

Enables or disables the display of the specified trace.
Queries the status for the specified trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	—
—	Bool	OFF ON 0 1	Refer to "Remarks"

Remarks

By default, Trace 1 is enabled (ON), and Trace 2 through Trace 6 are disabled (OFF).

Return Format

The query returns 1 or 0.

Example

The following command enables the display of Trace 1.

```
:TRACe1:DISPlay:STATe ON or :TRACe1:DISPlay:STATe 1
```

The following query returns 1.

```
:TRACe1:DISPlay:STATe?
```

:TRACe<n>:MODE

:TRACe<n>:TYPE

Syntax

```
:TRACe<n>:MODE WRITe|AVERAge|MAXHold|MINHold
:TRACe<n>:MODE?
:TRACe<n>:TYPE WRITe|AVERAge|MAXHold|MINHold
:TRACe<n>:TYPE?
```

Description

Sets the type of the specified trace.
Queries the type of the specified trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	—
—	Keyword	WRITe AVERAge MAXHold MINHold	WRITe

Remarks

WRITe: indicates clear/write.

AVERAge: indicates average.

MAXHold: indicates the maximum hold.

MINHold: indicates the minimum hold.

In the window that contains the Density view, only Trace 1 is available.

In the window that contains the PvT view, only Trace 1 is available and the trace type can only be selected to "Clear Write".

Return Format

The query returns WRIT, AVER, MAXH, or MINH.

Example

The following command sets the type of Trace 1 to Max Hold.

```
:TRACe1:MODE MAXHold
```

```
:TRACe1:TYPE MAXHold
```

The following query returns MAXH.

```
:TRACe1:MODE?
```

```
:TRACe1:TYPE?
```

:TRACe<n>:UPDate:STATe**Syntax**

```
:TRACe<n>:UPDate:STATe OFF|ON|0|1
```

```
:TRACe<n>:UPDate:STATe?
```

Description

Enables or disables the update of the specified trace.

Queries the status for the update of the specified trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	—
—	Bool	OFF ON 0 1	Refer to " Remarks "

Remarks

By default, Trace 1 is enabled (ON), and Trace 2 thru Trace 6 are disabled (OFF).

Return Format

The query returns 1 or 0.

Example

The following command enables the update of Trace 1.

```
:TRACe1:UPDate:STATe ON or :TRACe1:UPDate:STATe 1
```

The following query returns 1.

```
:TRACe1:UPDate:STATe?
```

:TRIGger Commands

Command List:

- ◆ [:TRIGger\[:SEquence\]:ATRigger](#)
- ◆ [:TRIGger\[:SEquence\]:ATRigger:STATe](#)
- ◆ [:TRIGger\[:SEquence\]:EXTernal<n>:DELay](#)
- ◆ [:TRIGger\[:SEquence\]:EXTernal<n>:DELay:STATe](#)
- ◆ [:TRIGger\[:SEquence\]:EXTernal<n>:SLOPe](#)
- ◆ [:TRIGger\[:SEquence\]:FMT:APTRigger](#)
- ◆ [:TRIGger\[:SEquence\]:FMT:CRITeria](#)
- ◆ [:TRIGger\[:SEquence\]:FMT:DELay](#)
- ◆ [:TRIGger\[:SEquence\]:FMT:DELay:STATe](#)
- ◆ [:TRIGger\[:SEquence\]:FMT:MASK](#)
- ◆ [:TRIGger\[:SEquence\]:FMT:MASK:EDIT](#)
- ◆ [:TRIGger\[:SEquence\]:FMT:MASK:RELative:AMPLitude](#)
- ◆ [:TRIGger\[:SEquence\]:FMT:MASK:RELative:FREQuency](#)
- ◆ [:TRIGger\[:SEquence\]:FMT:MASK<n>:BUILd](#)
- ◆ [:TRIGger\[:SEquence\]:FMT:MASK<n>:DATA](#)
- ◆ [:TRIGger\[:SEquence\]:FMT:MASK<n>:DELeTe](#)
- ◆ [:TRIGger\[:SEquence\]:FMT:MASK<n>:NEW](#)
- ◆ [:TRIGger\[:SEquence\]:HOLDoff](#)
- ◆ [:TRIGger\[:SEquence\]:HOLDoff:STATe](#)
- ◆ [:TRIGger\[:SEquence\]:SOURce](#)
- ◆ [:TRIGger\[:SEquence\]:VIDeo:DELay](#)
- ◆ [:TRIGger\[:SEquence\]:VIDeo:DELay:STATe](#)
- ◆ [:TRIGger\[:SEquence\]:VIDeo:LEVel](#)
- ◆ [:TRIGger\[:SEquence\]:VIDeo:SLOPe](#)
- ◆ [:TRIGger2:MODE](#)

:TRIGger[:SEQuence]:ATRigger

Syntax

```
:TRIGger[:SEQuence]:ATRigger <time>
:TRIGger[:SEQuence]:ATRigger?
```

Description

Sets the time that the analyzer will wait for the trigger to be initiated automatically.
Queries the time that the analyzer will wait for the trigger to be initiated automatically.

Parameter

Name	Type	Range	Default
<time>	Consecutive Real Number	1 ms to 100 s	100 ms

Remarks

This command is only valid when the auto triggering function is enabled.

Return Format

The query returns the time value in scientific notation. The unit is s.

Example

The following command sets the time to 10 ms.

```
:TRIGger:SEQuence:ATRigger 0.01
```

The following query returns 1.000000000e-02.

```
:TRIGger:SEQuence:ATRigger?
```

:TRIGger[:SEQuence]:ATRigger:STATe

Syntax

```
:TRIGger[:SEQuence]:ATRigger:STATe OFF|ON|0|1
:TRIGger[:SEQuence]:ATRigger:STATe?
```

Description

Enables or disables the auto trigger function.
Queries the setting status of auto trigger function.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 1 or 0.

Example

The following command enables the auto trigger function.

```
:TRIGger:SEQuence:ATRigger:STATe ON or :TRIGger:SEQuence:ATRigger:STATe 1
```

The following query returns 1.

```
:TRIGger:SEQuence:ATRigger:STATe?
```

:TRIGger[:SEQuence]:EXTErnal<n>:DELay

Syntax

```
:TRIGger[:SEQuence]:EXTErnal<n>:DELay <time>
:TRIGger[:SEQuence]:EXTErnal<n>:DELay?
```

Description

Sets the delay time for the external trigger.
Queries the delay time for the external trigger.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2	—
<time>	Consecutive Real Number	0 μ s to 500 ms	1 μ s

Remarks

When the parameter n is set to 1, it indicates External Trigger 1; when set to 2, it indicates External Trigger 2.

This command is only valid when the external trigger delay function is enabled.

Return Format

The query returns the delay time for the external trigger in scientific notation. The unit is s.

Example

The following command sets the delay time for External Trigger 1 to 100 ms.

```
:TRIGger:SEQuence:EXTErnal1:DELay 0.1
```

The following query returns 1.0000000000e-01.

```
:TRIGger:SEQuence:EXTErnal1:DELay?
```

:TRIGger[:SEQuence]:EXTErnal<n>:DELay:STATe

Syntax

```
:TRIGger[:SEQuence]:EXTErnal<n>:DELay:STATe OFF|ON|0|1
:TRIGger[:SEQuence]:EXTErnal<n>:DELay:STATe?
```

Description

Enables or disables the external trigger delay function.
Queries the status of the external trigger delay function.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2	—
—	Bool	OFF ON 0 1	OFF 0

Remarks

When the parameter n is set to 1, it indicates External Trigger 1; when set to 2, it indicates External Trigger 2.

Return Format

The query returns 1 or 0.

Example

The following command enables the delay function of External Trigger 1.

:TRIGger:SEquence:EXternal1:DElay:STATe ON or :TRIGger:SEquence:EXternal1:DElay:STATe 1

The following query returns 1.

:TRIGger:SEquence:EXternal1:DElay:STATe?

:TRIGger[:SEquence]:EXternal<n>:SLOPe

Syntax

:TRIGger:SEquence:EXternal<n>:SLOPe POSitive|NEGative

:TRIGger:SEquence:EXternal<n>:SLOPe?

Description

Sets the trigger edge for the external trigger.

Queries the trigger edge for the external trigger.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2	—
—	Keyword	POSitive NEGative	POSitive

Remarks

When the parameter n is set to 1, it indicates External Trigger 1; when set to 2, it indicates External Trigger 2.

POSitive: indicates the rising edge.

NEGative: indicates the falling edge.

Return Format

The query returns POS or NEG.

Example

The following command sets the trigger edge of External Trigger 1 to Positive.

:TRIGger:SEquence:EXternal1:SLOPe POSitive

The following query returns POS.

:TRIGger:SEquence:EXternal1:SLOPe?

:TRIGger[:SEquence]:FMT:APTRigger

Syntax

:TRIGger[:SEquence]:FMT:APTRigger <number>

:TRIGger[:SEquence]:FMT:APTRigger?

Description

Sets the number of times for acquisition after each effective trigger is completed.

Queries the number of times for acquisition after each effective trigger is completed.

Parameter

Name	Type	Range	Default
<number>	Integer	Refer to "Remarks"	1

Remarks

The minimum value of the parameter <number> is 1. When the trigger criteria of FMT is "Inside" or

"Outside", the maximum value of the parameter <number> is 1. In the Spectrogram measurement mode, the maximum value of the parameter <number> is 10,000. In the PVT measurement mode, the maximum value of the parameter <number> is 5,000.

This command is only valid when you select FMT to be the trigger source in RTSA mode.

Return Format

The query returns the number of acquisition times in integer.

Example

The following command sets the number of acquisition times to 5.

```
:TRIGger:SEQuence:FMT:APTRigger 5
```

The following query returns 5.

```
:TRIGger:SEQuence:FMT:APTRigger?
```

:TRIGger[:SEQuence]:FMT:CRITeria

Syntax

```
:TRIGger[:SEQuence]:FMT:CRITeria ENTER|LEAVE|INSide|OUTSide|ELEave|LENTer
```

```
:TRIGger[:SEQuence]:FMT:CRITeria?
```

Description

Sets the trigger criteria for FMT.

Queries the trigger criteria for FMT.

Parameter

Name	Type	Range	Default
—	Keyword	ENTER LEAVE INSide OUTSide ELEave LENTer	ENTER

Remarks

This command is only valid when you select FMT to be the trigger source in RTSA mode.

Return Format

The query returns ENT, LEAV, INS, OUTS, ELE, or LENT.

Example

The following command sets the trigger criteria for FMT to Enter.

```
:TRIGger:SEQuence:FMT:CRITeria ENTER
```

The following query returns ENT.

```
:TRIGger:SEQuence:FMT:CRITeria?
```

:TRIGger[:SEQuence]:FMT:DELaY

Syntax

```
:TRIGger[:SEQuence]:FMT:DELaY <time>
```

```
:TRIGger[:SEQuence]:FMT:DELaY?
```

Description

Sets the delay time for FMT.

Queries the delay time for FMT.

Parameter

Name	Type	Range	Default
<time>	Consecutive Real Number	0 us to 500 ms	1 μ s

Remarks

When "Inside" or "Outside" is selected to be the trigger criteria, the FMT trigger delay command is invalid.

This command is only valid when the following conditions are met: FMT is selected to be the trigger source in RTSA mode; FMT trigger delay function is enabled.

Return Format

The query returns the delay time for FMT in scientific notation. The unit is s.

Example

The following command sets the delay time for FMT to 100 ms.

```
:TRIGger:SEQuence:FMT:DElay 0.1
```

The following query returns 1.000000000e-01.

```
:TRIGger:SEQuence:FMT:DElay?
```

:TRIGger[:SEQuence]:FMT:DElay:STATe**Syntax**

```
:TRIGger[:SEQuence]:FMT:DElay:STATe OFF|ON|0|1
```

```
:TRIGger[:SEQuence]:FMT:DElay:STATe?
```

Description

Enables or disables the FMT trigger delay function.

Queries the status of the FMT trigger delay function.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

This command is only valid when you select FMT to be the trigger source in RTSA mode.

Return Format

The query returns 1 or 0.

Example

The following command enables the FMT trigger delay function.

```
:TRIGger:SEQuence:FMT:DElay:STATe ON or :TRIGger:SEQuence:FMT:DElay:STATe 1
```

The following query returns 1.

```
:TRIGger:SEQuence:FMT:DElay:STATe?
```

:TRIGger[:SEQuence]:FMT:MASK**Syntax**

```
:TRIGger[:SEQuence]:FMT:MASK UPPer|LOWer|BOTH
```

```
:TRIGger[:SEQuence]:FMT:MASK?
```

Description

Sets the mask to be used for the current trigger.
Queries the mask to be used for the current trigger.

Parameter

Name	Type	Range	Default
—	Keyword	UPPer LOWer BOTH	UPPer

Remarks

This command is only valid when you select FMT to be the trigger source in RTSA mode.

Return Format

The query returns UPP, LOW, or BOTH.

Example

The following command sets the mask to be used for the current trigger to Upper.
:TRIGger:SEQuence:FMT:MASK UPPer

The following query returns UPP.
:TRIGger:SEQuence:FMT:MASK?

:TRIGger[:SEQuence]:FMT:MASK:EDIT**Syntax**

:TRIGger[:SEQuence]:FMT:MASK:EDIT UPPer|LOWer
:TRIGger[:SEQuence]:FMT:MASK:EDIT?

Description

Sets the mask type that is currently viewed/edited.
Queries the mask type that is currently viewed/edited.

Parameter

Name	Type	Range	Default
—	Keyword	UPPer LOWer	UPPer

Remarks

This command is only valid when you select FMT to be the trigger source in RTSA mode.

Return Format

The query returns UPP or LOW.

Example

The following command sets the mask that is currently viewed/edited to Upper.
:TRIGger:SEQuence:FMT:MASK:EDIT UPPer

The following query returns UPP.
:TRIGger:SEQuence:FMT:MASK:EDIT?

:TRIGger[:SEQuence]:FMT:MASK:RELative:AMPLitude

Syntax

```
:TRIGger[:SEQuence]:FMT:MASK:RELative:AMPLitude ON|OFF|1|0
:TRIGger[:SEQuence]:FMT:MASK:RELative:AMPLitude?
```

Description

Sets whether the amplitudes of the mask points are coupled to the reference level of the instrument.
Queries whether the amplitudes of the mask points are coupled to the reference level of the instrument.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

OFF|0: disables the coupling function. That is, when "Fixed" is selected under **Y Axis Type**, the amplitude of the current mask point will not be affected by the reference level.
ON|1: enables the coupling function. That is, when "Relative" is selected under **Y Axis Type**, the amplitude of the current mask point is the difference between the point and the current reference level. If you modify the state of this parameter after the mask has been set, the amplitude of the mask should make corresponding changes based on the state of the parameter, so as to keep the relations between the mask and the reference level of the instrument unchanged.
When on, the amplitude of the mask point is expressed as an offset from the reference level.
This command is only valid when you select FMT to be the trigger source in RTSA mode.

Return Format

The query returns 1 or 0.

Example

The following command enables the coupling relationship between the amplitudes of the mask points and the instrument's reference level.

```
:TRIGger:SEQuence:FMT:MASK:RELative:AMPLitude ON
or :TRIGger:SEQuence:FMT:MASK:RELative:AMPLitude 1
```

The following query returns 1.

```
:TRIGger:SEQuence:FMT:MASK:RELative:AMPLitude?
```

:TRIGger[:SEQuence]:FMT:MASK:RELative:FREQuency

Syntax

```
:TRIGger[:SEQuence]:FMT:MASK:RELative:FREQuency ON|OFF|1|0
:TRIGger[:SEQuence]:FMT:MASK:RELative:FREQuency?
```

Description

Sets whether the frequencies of the mask points are coupled to the center frequency of the instrument.
Queries whether the frequencies of the mask points are coupled to the center frequency of the instrument.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

OFF|0: disables the coupling function. That is, when "Fixed" is selected under **X Axis Type**, the

frequency of the current mask point will not be affected by the center frequency.

ON|1: enables the coupling function. That is, when "Relative" is selected under **X Axis Type**, the frequency of the current mask point is the difference between the point and the current center frequency. If you modify the state of this parameter after the mask has been set, the frequency of the mask should make corresponding changes based on the state of the parameter, so as to keep the relations between the mask and the center frequency of the instrument unchanged.

When on, the frequencies of the mask points are expressed as an offset from the center frequency. At this time, the frequencies of the mask points can be negative values.

This command is only valid when you select FMT to be the trigger source in RTSA mode.

Return Format

The query returns 1 or 0.

Example

The following command enables the coupling relationship between the frequencies of the mask points and the instrument's center frequency.

```
:TRIGger:SEquence:FMT:MASK:RELative:FREQuency ON
```

```
or :TRIGger:SEquence:FMT:MASK:RELative:FREQuency 1
```

The following query returns 1.

```
:TRIGger:SEquence:FMT:MASK:RELative:FREQuency?
```

:TRIGger[:SEquence]:FMT:MASK<n>:BUILd

Syntax

```
:TRIGger[:SEquence]:FMT:MASK<n>:BUILd TRACE1|TRACE2|TRACE3|TRACE4|TRACE5|TRACE6
```

Description

Creates a mask from a trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2	—
—	Keyword	TRACE1 TRACE2 TRACE3 TRACE4 TRACE5 TRACE6	—

Remarks

When <n> is set to 1, it indicates that the upper mask is being edited; when it is set to 2, it indicates that the lower mask is being edited.

This command is only valid when you select FMT to be the trigger source in RTSA mode.

Example

The following command creates a upper mask from trace1.

```
:TRIGger:SEquence:FMT:MASK1:BUILd TRACE1
```

:TRIGger[:SEquence]:FMT:MASK<n>:DATA

Syntax

```
:TRIGger[:SEquence]:FMT:MASK<n>:DATA <freq>,<ampl>{,<freq>,<ampl>}
```

```
:TRIGger[:SEquence]:FMT:MASK<n>:DATA?
```

Description

Edits the mask parameters.

Queries the mask parameters.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2	—
<freq>	Consecutive Real Number	0 Hz to 3 GHz	
<ampl>	Consecutive Real Number	-1,000 dBm to 1,000 dBm	

Remarks

When <n> is set to 1, it indicates that the upper mask is being edited; when it is set to 2, it indicates that the lower mask is being edited.

This command is only valid when you select FMT to be the trigger source in RTSA working mode.

Return Format

The query returns the mask parameters that are being edited currently in scientific notation.

Example

The following command edits the two points of the upper mask.

```
:TRIGger:SEquence:FMT:MASK1:DATA -80000000, -50, 80000000, -50
```

The following query returns -8.000000e+07, -5.000000e+01, 8.000000e+07, -5.000000e+01

```
:TRIGger:SEquence:FMT:MASK1:DATA?
```

:TRIGger[:SEquence]:FMT:MASK<n>:DElete

Syntax

```
:TRIGger[:SEquence]:FMT:MASK<n>:DElete
```

Description

Deletes all the masks.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2	—

Remarks

When <n> is set to 1, edit the upper mask; when set to 2, edit the lower mask.

This command is only valid when you select FMT to be the trigger source in RTSA mode.

:TRIGger[:SEquence]:FMT:MASK<n>:NEW

Syntax

```
:TRIGger[:SEquence]:FMT:MASK<n>:NEW
```

Description

Clears the currently activated mask and creates a default new mask.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2	—

Remarks

When <n> is set to 1, it indicates that the upper mask is being edited; when it is set to 2, it indicates that the lower mask is being edited.

This command is only valid when you select FMT to be the trigger source in RTSA working mode.

:TRIGger[:SEQuence]:HOLDoff**Syntax**

:TRIGger[:SEQuence]:HOLDoff <time>

:TRIGger[:SEQuence]:HOLDoff?

Description

Sets the trigger holdoff time.

Queries the trigger holdoff time.

Parameter

Name	Type	Range	Default
<time>	Consecutive Real Number	100 us to 500 ms (GPSA) 0 us to 10 s (RTSA)	100 ms

Remarks

This command is only valid when the trigger holdoff function is enabled.

Return Format

The query returns the trigger holdoff time in scientific notation. The unit is s.

Example

The following command sets the trigger holdoff time to 100 ms.

```
:TRIGger:SEQuence:HOLDoff 0.1
```

The following query returns 1.000000000e-01.

```
:TRIGger:SEQuence:HOLDoff?
```

:TRIGger[:SEQuence]:HOLDoff:STATe**Syntax**

:TRIGger[:SEQuence]:HOLDoff:STATe OFF|ON|0|1

:TRIGger[:SEQuence]:HOLDoff:STATe?

Description

Enables or disables the trigger holdoff function.

Queries the status of the trigger holdoff function.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 1 or 0.

Example

The following command enables the trigger holdoff function.

:TRIGger:SEquence:HOLDoff:STATe ON or :TRIGger:SEquence:HOLDoff:STATe 1

The following query returns 1.

:TRIGger:SEquence:HOLDoff:STATe?

:TRIGger[:SEquence]:SOURce

Syntax

:TRIGger[:SEquence]:SOURce EXTernal1|EXTernal2|IMMediate|VIDeo|FMT|POWer

:TRIGger[:SEquence]:SOURce?

Description

Sets the trigger source.

Queries the trigger source.

Parameter

Name	Type	Range	Default
—	Keyword	EXTernal1 EXTernal2 IMMediate VIDeo FMT POWer	IMMediate

Remarks

EXTernal1: indicates External Trigger 1.

EXTernal2: indicates External Trigger 2.

IMMediate: indicates the free-run trigger.

VIDeo: indicates the video trigger. This command is only available for GPSA mode.

FMT: indicates the frequency mask trigger. This command is only available for RTSA mode.

Power: indicates the IF power trigger. This command is only available for RTSA mode.

Return Format

The query returns EXT1, EXT2, IMM, VID, FMT, or POW.

Example

The following command sets the trigger source to free-run trigger.

:TRIGger:SEquence:SOURce IMMediate

The following query returns IMM.

:TRIGger:SEquence:SOURce?

:TRIGger[:SEquence]:VIDeo:DElay

Syntax

:TRIGger[:SEquence]:VIDeo:DElay <time>

:TRIGger[:SEquence]:VIDeo:DElay?

Description

Sets the delay time for the video trigger.

Queries the delay time for the video trigger.

Parameter

Name	Type	Range	Default
<time>	Consecutive Real Number	0 μ s to 500 ms	1 μ s

Remarks

This command is only valid when the video trigger delay function is enabled in GPSA mode.

Return Format

The query returns the delay time for video trigger in scientific notation. The unit is s.

Example

The following command sets the delay time for the video trigger to 100 ms.

```
:TRIGger:SEQuence:VIDeo:DELaY 0.1
```

The following query returns 1.000000e-01.

```
:TRIGger:SEQuence:VIDeo:DELaY?
```

:TRIGger[:SEQuence]:VIDeo:DELaY:STATe**Syntax**

```
:TRIGger[:SEQuence]:VIDeo:DELaY:STATe OFF|ON|0|1
```

```
:TRIGger[:SEQuence]:VIDeo:DELaY:STATe?
```

Description

Enables or disables the video trigger delay function.

Queries the status of the video trigger delay function.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

This command is only available for GPSA mode.

Return Format

The query returns 1 or 0.

Example

The following command enables the delay function for the video trigger.

```
:TRIGger:SEQuence:VIDeo:DELaY:STATe ON or :TRIGger:SEQuence:VIDeo:DELaY:STATe 1
```

The following query returns 1.

```
:TRIGger:SEQuence:VIDeo:DELaY:STATe?
```

:TRIGger[:SEQuence]:VIDeo:LEVel**Syntax**

```
:TRIGger:SEQuence:VIDeo:LEVel <ampl>
```

```
:TRIGger:SEQuence:VIDeo:LEVel?
```

Description

Sets the trigger level of the video trigger.

Queries the trigger level of the video trigger.

Parameter

Name	Type	Range	Default
<ampl>	Consecutive Real Number	-140 dBm to 30 dBm	-25 dBm

Remarks

This command is only valid when the following conditions are met: in GPSA mode; selecting the video trigger.

Return Format

The query returns the trigger level in scientific notation.

Example

The following command sets the trigger level of the video trigger to 10 dBm.

```
:TRIGger:SEquence:VIDeo:LEVel 10
```

The following query returns 1.000000e+01.

```
:TRIGger:SEquence:VIDeo:LEVel?
```

:TRIGger[:SEquence]:VIDeo:SLOPe**Syntax**

```
:TRIGger[:SEquence]:VIDeo:SLOPe POSitive|NEGative
```

```
:TRIGger[:SEquence]:VIDeo:SLOPe?
```

Description

Sets the polarity of the video trigger.

Queries the polarity of the video trigger.

Parameter

Name	Type	Range	Default
—	Keyword	POSitive NEGative	POSitive

Remarks

POSitive: indicates the positive slew rate.

NEGative: indicates the negative slew rate.

This command is only available for GPSA mode.

Return Format

The query returns POS or NEG.

Example

The following command sets the polarity of the video trigger to Positive.

```
:TRIGger:SEquence:VIDeo:SLOPe POSitive
```

The following query returns POS.

```
:TRIGger:SEquence:VIDeo:SLOPe?
```

:TRIGger2:MODE**Syntax**

```
:TRIGger2:MODE IN|OUT|0|1
```

```
:TRIGger2:MODE?
```

Description

Sets the interface type of External Trigger 2.

Queries the interface type of External Trigger 2.

Parameter

Name	Type	Range	Default
—	Keyword	IN OUT 0 1	IN 0

Remarks

IN|0: indicates the input interface.

OUT|1: indicates the output interface.

Return Format

The query returns 0 or 1.

Example

The following command sets External Trigger 2 to the input interface.

:TRIGger2:MODE IN

The following query returns 0.

:TRIGger2:MODE?

:UNIT Command

Command List:

◆ [:UNIT:POWer](#)

:UNIT:POWer

Syntax

:UNIT:POWer DBM|DBMV|DBUV|V|W
:UNIT:POWer?

Description

Sets the unit of the Y axis.

Queries the unit of the Y axis.

Parameter

Name	Type	Range	Default
—	Keyword	DBM DBMV DBUV V W	Refer to " Remarks "

Remarks

The default log unit is dBm.

The default linear unit is V.

Return Format

The query returns DBM, DBMV, DBUV, V, or W.

Example

The following command sets the amplitude unit to Watts.

:UNIT:POWer W

The following query returns W.

:UNIT:POWer?

Chapter 3 Command System for EMI Mode

This chapter introduces the commands of the RSA series spectrum analyzer in EMI mode.

Contents in this chapter:

- ◆ [:CALCulate Commands](#)
- ◆ [:CALibration Commands](#)
- ◆ [:COUPle Command](#)
- ◆ [:CONFigure Command](#)
- ◆ [:DISPlay Commands](#)
- ◆ [:FETCh Command](#)
- ◆ [:FORMat Commands](#)
- ◆ [IEEE 488.2 Common Commands](#)
- ◆ [:INITiate Commands](#)
- ◆ [:INSTrument Commands](#)
- ◆ [:MMEMory Commands](#)
- ◆ [\[:SENSe\] Commands](#)
- ◆ [:STATus Commands](#)
- ◆ [:SYSTem Commands](#)
- ◆ [:TRACe Commands](#)
- ◆ [:TRIGger Commands](#)
- ◆ [:UNIT Command](#)

Remarks:

1. For the command set, unless otherwise specified, the query command returns "N/A" (without quotations in its return format) if no specified option is installed. If the queried function is disabled or improper type match is found, the query command will return "error" (without quotations in its return format).
2. This manual takes RSA3030E as an example to illustrate the range of the parameters in each command.

:CALCulate Commands

Command List:

- ◆ [:CALCulate:EMI:SLIST:DELeTe](#)
- ◆ [:CALCulate:FSCan:MAMarker\[:SET\]:SLIST](#)
- ◆ [:CALCulate:FSCan:MARKer:AOff](#)
- ◆ [:CALCulate:FSCan:MARKer:COUPle\[:STATe\]](#)
- ◆ [:CALCulate:FSCan:MARKer:PEAK:EXCursion](#)
- ◆ [:CALCulate:FSCan:MARKer:PEAK:EXCursion:STATe](#)
- ◆ [:CALCulate:FSCan:MARKer:PEAK:SEARch:MODE](#)
- ◆ [:CALCulate:FSCan:MARKer:PEAK:SEARch:THReshold](#)
- ◆ [:CALCulate:FSCan:MARKer:PEAK:SEARch:THReshold:STATe](#)
- ◆ [:CALCulate:FSCan:MARKer<n>:FUNCTion:MAMarker?](#)
- ◆ [:CALCulate:FSCan:MARKer<n>:MAXimum](#)
- ◆ [:CALCulate:FSCan:MARKer<n>:MAXimum:LEFT](#)
- ◆ [:CALCulate:FSCan:MARKer<n>:MAXimum:NEXT](#)
- ◆ [:CALCulate:FSCan:MARKer<n>:MAXimum:RIGHT](#)
- ◆ [:CALCulate:FSCan:MARKer<n>:MINimum](#)
- ◆ [:CALCulate:FSCan:MARKer<n>:MODE](#)
- ◆ [:CALCulate:FSCan:MARKer<n>:REFerence](#)
- ◆ [:CALCulate:FSCan:MARKer<n>\[:SET\]:SLIST](#)
- ◆ [:CALCulate:FSCan:MARKer<n>\[:SET\]:METer](#)
- ◆ [:CALCulate:FSCan:MARKer<n>:TO:METer](#)
- ◆ [:CALCulate:FSCan:MARKer<n>:TRACe](#)
- ◆ [:CALCulate:FSCan:SLIST:APPend:METer](#)
- ◆ [:CALCulate:FSCan:SLIST:DELeTe:SIGNAL](#)
- ◆ [:CALCulate:FSCan:SLIST:MARK:ALL](#)
- ◆ [:CALCulate:FSCan:SLIST:MARK:CLEar:ALL](#)
- ◆ [:CALCulate:FSCan:SLIST:MARK:CLEar:SIGNAL](#)
- ◆ [:CALCulate:FSCan:SLIST:MARK:SIGNAL](#)
- ◆ [:CALCulate:FSCan:SLIST:REPLace:METer](#)
- ◆ [:CALCulate:FSCan:SLIST:SET:METer](#)
- ◆ [:CALCulate:FSCan:SLIST:SORT:AUTO](#)
- ◆ [:CALCulate:FSCan:SLIST:SORT:DAMPLitude](#)
- ◆ [:CALCulate:FSCan:SLIST:SORT:DLDelta](#)
- ◆ [:CALCulate:FSCan:SLIST:SORT:ORDer](#)
- ◆ [:CALCulate:FSCan:SLIST:SORT:TYPE](#)
- ◆ [:CALCulate:FSCan:SLIST:ZOOM](#)
- ◆ [:CALCulate:FSCan:SLIST:ZOOM:OUT](#)

- ◆ [:CALCulate:LLINe:ALL:DELeTe](#)
- ◆ [:CALCulate:LLINe:TEST](#)
- ◆ [:CALCulate:LLINe<n>:AMPLitude:CMODE:RELative](#)
- ◆ [:CALCulate:LLINe<n>:BUILd](#)
- ◆ [:CALCulate:LLINe<n>:CONTRol:INTERpolate:TYPE](#)
- ◆ [:CALCulate:LLINe<n>:COPY](#)
- ◆ [:CALCulate:LLINe<n>:DATA](#)
- ◆ [:CALCulate:LLINe<n>:DELeTe](#)
- ◆ [:CALCulate:LLINe<n>:DISPlay](#)
- ◆ [:CALCulate:LLINe<n>:FAIL?](#)
- ◆ [:CALCulate:LLINe<n>:FREQuency:CMODE:RELative](#)
- ◆ [:CALCulate:LLINe<n>:MARGIn](#)
- ◆ [:CALCulate:LLINe<n>:MARGIn:STATe](#)
- ◆ [:CALCulate:LLINe<n>:OFFSet:X](#)
- ◆ [:CALCulate:LLINe<n>:OFFSet:Y](#)
- ◆ [:CALCulate:LLINe<n>:TRACe](#)
- ◆ [:CALCulate:MARKer:PEAK:SEARch:THReshold:LINe](#)
- ◆ [:CALCulate:MARKer<n>:LINes\[:STATe\]](#)
- ◆ [:CALCulate:MARKer<n>:STATe](#)
- ◆ [:CALCulate:MARKer<n>:X](#)
- ◆ [:CALCulate:MARKer<n>:Y?](#)
- ◆ [:CALCulate:METER:LIMit:ALL:FAIL?](#)
- ◆ [:CALCulate:METER:POWer\[:CURRent\]?](#)
- ◆ [:CALCulate:METER:POWer:PEAK?](#)
- ◆ [:CALCulate:METER<n>:LIMit\[:DATA\]](#)
- ◆ [:CALCulate:METER<n>:LIMit:FAIL?](#)
- ◆ [:CALCulate:METER<n>:LIMit:STATe](#)

:CALCulate:EMI:SLIST:DELeTe

Syntax

:CALCulate:EMI:SLIST:DELeTe ALL|CURRent|MARKed|UNMarked

Description

Sets the signal type to be deleted.

Parameter

Name	Type	Range	Default
--	Discrete	ALL CURRent MARKed UNMarked	CURRent

Remarks

ALL: deletes all the signals in the signal table.

CURRent: deletes the currently selected signal from the signal table.

MARKed: deletes all the marked signals from the signal table.

UNMarked: deletes all the unmarked signals from the signal table.

Example

The following command deletes all the signals in the signal table.

```
:CALCulate:EMI:SLIST:DELeTe ALL
```

:CALCulate:FSCan:MAMarker[:SET]:SLIST

Syntax

:CALCulate:FSCan:MAMarker[:SET]:SLIST

Description

Adds the current measurement results to the signal table.

:CALCulate:FSCan:MARKer:AOff

Syntax

:CALCulate:FSCan:MARKer:AOff

Description

Turns off all the enabled markers.

:CALCulate:FSCan:MARKer:COUPle[:STATe]

Syntax

:CALCulate:FSCan:MARKer:COUPle[:STATe] OFF|ON|0|1

:CALCulate:FSCan:MARKer:COUPle[:STATe]?

Description

Enables or disables the couple marker function.

Queries the state of the couple marker function.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	OFF 0

Remarks

When you enable the couple marker function, moving any marker will enable other markers (except the Off marker) to move with it.

Return Format

The query returns 0 or 1.

Example

The following command disables the couple marker function.

```
:CALCulate:FSCan:MARKer:COUPle:STATe OFF or :CALCulate:FSCan:MARKer:COUPle:STATe 0
```

The following query returns 0.

```
:CALCulate:FSCan:MARKer:COUPle:STATe?
```

:CALCulate:FSCan:MARKer:PEAK:EXCursion**Syntax**

```
:CALCulate:FSCan:MARKer:PEAK:EXCursion <rel_ampl>
```

```
:CALCulate:FSCan:MARKer:PEAK:EXCursion?
```

Description

Sets the peak excursion. The unit is dB.

Queries the peak excursion.

Parameter

Name	Type	Range	Default
<rel_ampl>	Consecutive Real Number	0 dB to 100 dB	6 dB

Return Format

The query returns the peak excursion in scientific notation.

Example

The following command sets the peak excursion to 12 dB.

```
:CALCulate:FSCan:MARKer:PEAK:EXCursion 12
```

The following query returns 1.200000000e+01.

```
:CALCulate:FSCan:MARKer:PEAK:EXCursion?
```

:CALCulate:FSCan:MARKer:PEAK:EXCursion:STATe**Syntax**

```
:CALCulate:FSCan:MARKer:PEAK:EXCursion:STATe OFF|ON|0|1
```

```
:CALCulate:FSCan:MARKer:PEAK:EXCursion:STATe?
```

Description

Enables or disables the peak excursion function.

Queries the status of the peak excursion function.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command enables the peak excursion function.

:CALCulate:FSCan:MARKer:PEAK:EXCursion:STATe ON
or :CALCulate:FSCan:MARKer:PEAK:EXCursion:STATe 1

The following query returns 1.

:CALCulate:FSCan:MARKer:PEAK:EXCursion:STATe?

:CALCulate:FSCan:MARKer:PEAK:SEARch:MODE**Syntax**

:CALCulate:FSCan:MARKer:PEAK:SEARch:MODE PARAmeter|MAXimum
:CALCulate:FSCan:MARKer:PEAK:SEARch:MODE?

Description

Sets the peak search mode.

Queries the peak search mode.

Parameter

Name	Type	Range	Default
--	Keyword	PARAmeter MAXimum	MAXimum

Remarks

PARAmeter: indicates parameter. If "parameter" is selected under Search Mode, the system will search for the peak of the specified parameter on the trace.

MAXimum: indicates maximum. If "Max" is selected under Search Mode, the system will search for the maximum value on the trace.

The command is only valid for the peak search executed by sending the [:CALCulate:FSCan:MARKer<n>:MAXimum](#) command. Other items under the peak search menu such as Next Peak, Next Peak Right, Next Peak Left, and Minimum Peak are all searched based on "parameter".

Return Format

The query returns PAR or MAX.

Example

The following command sets the peak search mode to PARAmeter.

:CALCulate:FSCan:MARKer:PEAK:SEARch:MODE PARAmeter

The following query returns PAR.

:CALCulate:FSCan:MARKer:PEAK:SEARch:MODE?

:CALCulate:FSCan:MARKer:PEAK:SEARch:THReshold

Syntax

```
:CALCulate:FSCan:MARKer:PEAK:SEARch:THReshold <ampl>
:CALCulate:FSCan:MARKer:PEAK:SEARch:THReshold?
```

Description

Sets the peak threshold.
Queries the peak threshold.

Parameter

Name	Type	Range	Default
<ampl>	Consecutive Real Number	-200 dBm to 0 dBm	-90 dBm

Return Format

The query returns the peak threshold in scientific notation.

Example

The following command sets the peak threshold to -100 dBm.
:CALCulate:FSCan:MARKer:PEAK:SEARch:THReshold -100

The following query returns -1.000000e+02.
:CALCulate:FSCan:MARKer:PEAK:SEARch:THReshold?

:CALCulate:FSCan:MARKer:PEAK:SEARch:THReshold:STATe

Syntax

```
:CALCulate:FSCan:MARKer:PEAK:SEARch:THReshold:STATe OFF|ON|0|1
:CALCulate:FSCan:MARKer:PEAK:SEARch:THReshold:STATe?
```

Description

Enables or disables the peak threshold function.
Queries the status of the peak threshold function.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command enables the peak threshold function.
:CALCulate:FSCan:MARKer:PEAK:SEARch:THReshold:STATe ON
or :CALCulate:FSCan:MARKer:PEAK:SEARch:THReshold:STATe 1

The following query returns 1.
:CALCulate:FSCan:MARKer:PEAK:THReshold:STATe?

:CALCulate:FSCan:MARKer<n>:FUNCTION:MAMarker?

Syntax

:CALCulate:FSCan:MARKer<n>:FUNCTION:MAMarker?

Description

Queries the result measured at the marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--

Return Format

The query returns the result measured at the marker in scientific notation, including detector 1 amplitude value, detector 2 amplitude value, detector 3 amplitude value and frequency value at the marker. The return values are separated by commas. If the detector is disabled or the measurement is not completed, the query returns -1.700000000e+02.

Example

The following command returns the result measured at Marker 1 -1.700000000e+02,-1.700000000e+02,-1.700000000e+02,5.150000000e+08.

:CALCulate:FSCan:MARKer1:FUNCTION:MAMarker?

:CALCulate:FSCan:MARKer<n>:MAXimum

Syntax

:CALCulate:FSCan:MARKer<n>:MAXimum

Description

Performs one peak search based on the search mode set by the [:CALCulate:FSCan:MARKer:PEAK:SEARCH:MODE](#) command and marks it with the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--

Remarks

When no peak is found, a prompt message "No peak found" is displayed on the screen.

Example

The following command performs one peak search, and marks with Marker 2.

:CALCulate:FSCan:MARKer2:MAXimum:MAX

:CALCulate:FSCan:MARKer<n>:MAXimum:LEFT

Syntax

:CALCulate:FSCan:MARKer<n>:MAXimum:LEFT

Description

Searches for and marks the nearest peak which is located at the left side of the current peak and meets the peak search condition.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--

Remarks

When no peak is found, a prompt message "No peak found" is displayed on the screen.

Example

The following command performs one left peak search, and marks with Marker 2.

```
:CALCulate:FSCan:MARKer2:MAXimum:LEFT
```

:CALCulate:FSCan:MARKer<n>:MAXimum:NEXT**Syntax**

```
:CALCulate:FSCan:MARKer<n>:MAXimum:NEXT
```

Description

Searches for and marks the peak whose amplitude on the trace is next to that of the current peak and which meets the peak search condition.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--

Remarks

When no peak is found, a prompt message "No peak found" is displayed on the screen.

Example

The following command performs one next peak search, and marks with Marker 2.

```
:CALCulate:FSCan:MARKer2:MAXimum:NEXT
```

:CALCulate:FSCan:MARKer<n>:MAXimum:RIGHT**Syntax**

```
:CALCulate:FSCan:MARKer<n>:MAXimum:RIGHT
```

Description

Searches for and marks the nearest peak which is located at the right side of the current peak and meets the peak search condition.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--

Remarks

When no peak is found, a prompt message "No peak found" is displayed on the screen.

Example

The following command performs one right peak search, and marks with Marker 2.

```
:CALCulate:FSCan:MARKer2:MAXimum:RIGHT
```

:CALCulate:FSCan:MARKer<n>:MINimum

Syntax

:CALCulate:FSCan:MARKer<n>:MINimum

Description

Searches for and marks the peak with the minimum amplitude on the trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--

Remarks

When no peak is found, a prompt message "No peak found" is displayed on the screen.

Example

The following command performs one minimum search, and marks it with Marker 2.

```
:CALCulate:FSCan:MARKer2:MINimum
```

:CALCulate:FSCan:MARKer<n>:MODE

Syntax

```
:CALCulate:FSCan:MARKer<n>:MODE POSition|DELTA|OFF
```

```
:CALCulate:FSCan:MARKer<n>:MODE?
```

Description

Sets the type of the specified marker.

Queries the type of the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--
--	Keyword	POSition DELTA OFF	POSition

Remarks

POSition: indicates the normal marker.

DELTA: indicates difference between two data points.

OFF: turns off the selected marker.

Return Format

The query returns POS, DELT, or OFF.

Example

The following command sets the type of Marker 1 to Position.

```
:CALCulate:FSCan:MARKer1:MODE POSition
```

The following query returns POS.

```
:CALCulate:FSCan:MARKer1:MODE?
```

:CALCulate:FSCan:MARKer<n>:REFErrence

Syntax

:CALCulate:FSCan:MARKer<n>:REFErrence <integer>
:CALCulate:FSCan:MARKer<n>:REFErrence?

Description

Sets the reference marker for the specified marker.
Queries the reference marker for the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--
<integer>	Integer	1 to 8	By default, the reference marker is the marker next to it.

Remarks

Each marker can have another marker to be its reference marker.
If the current marker is a Delta marker, the measurement result of the marker will be determined by the reference marker.
Any marker cannot have itself to be the reference marker.

Example

The following command sets the reference marker for the Marker 1 to 2.
:CALCulate:FSCan:MARKer1:REFErrence 2
The following query returns 2.
:CALCulate:FSCan:MARKer1:REFErrence?

:CALCulate:FSCan:MARKer<n>[:SET]:SLIST

Syntax

:CALCulate:FSCan:MARKer<n>[:SET]:SLIST

Description

Adds the frequency at the specified marker to the signal table.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--

Example

The following command adds the frequency at the Marker 1 (Position) to the signal table.
:CALCulate:FSCan:MARKer1:SET:SLIST

:CALCulate:FSCan:MARKer<n>[:SET]:METer

Syntax

:CALCulate:FSCan:MARKer<n>[:SET]:METer

Description

Sets the frequency at the currently selected marker to the frequency of the meter.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--

Example

The following command sets the frequency at Marker 1 to the frequency of the meter.

```
:CALCulate:FSCan:MARKer1:SET:METER
```

:CALCulate:FSCan:MARKer<n>:TO:METER**Syntax**

```
:CALCulate:FSCan:MARKer<n>:TO:METER
```

Description

Sets the frequency of the meter to the frequency at the currently selected marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--

Example

The following command sets the frequency of the meter to the frequency at Marker 1.

```
:CALCulate:FSCan:MARKer1:TO:METER
```

:CALCulate:FSCan:MARKer<n>:TRACE**Syntax**

```
:CALCulate:FSCan:MARKer<n>:TRACE <integer>
```

```
:CALCulate:FSCan:MARKer<n>:TRACE?
```

Description

Sets the marker trace for the specified marker.

Queries the marker trace for the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--
<integer>	Discrete	1 2 3	1

Remarks

<integer> indicates the marker trace, and its range is from Trace 1 to Trace 3.

Return Format

The query returns any integer from 1 to 3.

Example

The following command sets the marker trace of Marker 1 to be Trace 2.

```
:CALCulate:FSCan:MARKer1:TRACE 2
```

The following query returns 2.

```
:CALCulate:FSCan:MARKer1:TRACE?
```

:CALCulate:FSCan:SLIST:APPend:METer**Syntax**

```
:CALCulate:FSCan:MARKer<n>[:SET]:SLIST
```

Description

Adds the frequency of the meter to the signal table.

:CALCulate:FSCan:SLIST:DELeTe:SIGNal**Syntax**

```
:CALCulate:FSCan:SLIST:DELeTe:SIGNal <integer>
```

Description

Deletes the selected signal(s) from the signal table.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 2,000	--

Example

The following command deletes Signal 20 from the signal table.

```
:CALCulate:FSCan:SLIST:DELeTe:SIGNal 20
```

:CALCulate:FSCan:SLIST:MARK:ALL**Syntax**

```
:CALCulate:FSCan:SLIST:MARK:ALL
```

Description

Marks all the signals in the signal table.

:CALCulate:FSCan:SLIST:MARK:CLEAr:ALL**Syntax**

```
:CALCulate:FSCan:SLIST:MARK:CLEAr:ALL
```

Description

Clears all the marks in the signal table.

:CALCulate:FSCan:SLIST:MARK:CLEAr:SIGNal**Syntax**

```
:CALCulate:FSCan:SLIST:MARK:CLEAr:SIGNal <integer>
```

Description

Clears the mark of the specified signal.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 2,000	--

Example

The following command clears the mark of Signal 20 in the signal table.

```
:CALCulate:FSCan:SLIST:MARK:CLEar:SIGNal 20
```

:CALCulate:FSCan:SLIST:MARK:SIGNal**Syntax**

```
:CALCulate:FSCan:SLIST:MARK:SIGNal <integer>
```

Description

Marks the specified signal.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 2,000	--

Example

The following command marks Signal 20 in the signal table.

```
:CALCulate:FSCan:SLIST:MARK:SIGNal 20
```

:CALCulate:FSCan:SLIST:REPLace:METER**Syntax**

```
:CALCulate:FSCan:SLIST:REPLace:METER <integer>
```

Description

Replaces the frequency of the currently selected signal with the currently set frequency of the meter.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 2,000	--

Example

The following command replaces the frequency of Signal 20 with the frequency of the meter.

```
:CALCulate:FSCan:SLIST:REPLace:METER 20
```

:CALCulate:FSCan:SLIST:SET:METER**Syntax**

```
:CALCulate:FSCan:SLIST:SET:METER <integer>
```

Description

Sets the frequency of the meter to the frequency of the specified signal.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 2,000	--

Example

The following command sets the frequency of the meter to the frequency of Signal 20.

```
:CALCulate:FSCan:SLIST:SET:METER 20
```

:CALCulate:FSCan:SLIST:SORT:AUTO**Syntax**

```
:CALCulate:FSCan:SLIST:SORT:AUTO OFF|ON|0|1
```

```
:CALCulate:FSCan:SLIST:SORT:AUTO?
```

Description

Enables or disables the auto sort function.

Queries the status of the auto sort function.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command disables the auto sort function.

```
:CALCulate:FSCan:SLIST:SORT:AUTO OFF or :CALCulate:FSCan:SLIST:SORT:AUTO 0
```

The following query returns 0.

```
:CALCulate:FSCan:SLIST:SORT:AUTO?
```

:CALCulate:FSCan:SLIST:SORT:DAMPlitude**Syntax**

```
:CALCulate:FSCan:SLIST:SORT:DAMPlitude DET1|DET2|DET3
```

```
:CALCulate:FSCan:SLIST:SORT:DAMPlitude?
```

Description

Sets the detector amplitude sorting mode for the signal.

Queries the detector amplitude sorting mode for the signal.

Parameter

Name	Type	Range	Default
--	Keyword	DET1 DET2 DET3	--

Return Format

The query returns DET1, DET2, or DET3.

Example

The following command sets the detector amplitude sorting mode for the signal to DET1.

```
:CALCulate:FSCan:SLIST:SORT:DAMPlitude DET1
```

The following query returns DET1.
:CALCulate:FSCan:SLIST:SORT:DAMPLitude?

:CALCulate:FSCan:SLIST:SORT:DLDelta

Syntax

:CALCulate:FSCan:SLIST:SORT:DLDelta DET1|DET2|DET3
:CALCulate:FSCan:SLIST:SORT:DLDelta?

Description

Sets the detector limit delta amplitude mode for the signal.
Queries the detector limit delta amplitude mode for the signal.

Parameter

Name	Type	Range	Default
--	Keyword	DET1 DET2 DET3	--

Return Format

The query returns DET1, DET2, or DET3.

Example

The following command sets the limit delta amplitude mode for the signal to DET1.
:CALCulate:FSCan:SLIST:SORT:DLDelta DET1

The following query returns DET1.
:CALCulate:FSCan:SLIST:SORT:DLDelta?

:CALCulate:FSCan:SLIST:SORT:ORDER

Syntax

:CALCulate:FSCan:SLIST:SORT:ORDER ASCending|DESCending
:CALCulate:FSCan:SLIST:SORT:ORDER?

Description

Sets the sort order of the signal.
Queries the sort order of the signal.

Parameter

Name	Type	Range	Default
--	Discrete	ASCending DESCending	ASCending

Return Format

The query returns ASC or DESC.

Example

The following command sets the sort order of the signal to ASCending.
:CALCulate:FSCan:SLIST:SORT:ORDER ASCending

The following query returns ASC.
:CALCulate:FSCan:SLIST:SORT:ORDER?

:CALCulate:FSCan:SLIST:SORT:TYPE

Syntax

:CALCulate:FSCan:SLIST:SORT:TYPE FREQuency|DAMPlitude|DLDelta
:CALCulate:FSCan:SLIST:SORT:TYPE?

Description

Sets the sort mode of the signal.

Queries the sort mode of the signal.

Parameter

Name	Type	Range	Default
--	Keyword	FREQuency DAMPlitude DLDelta	FREQuency

Remarks

FREQuency: indicates the frequency.

DAMPlitude: indicates the detector amplitude.

DLDelta: indicates the detector limit delta amplitude.

Return Format

The query returns FREQ, DAMP, or DLD.

Example

The following command sets the sort mode of the signal to FREQuency.

```
:CALCulate:FSCan:SLIST:SORT:TYPE FREQuency
```

The following query returns FREQ.

```
:CALCulate:FSCan:SLIST:SORT:TYPE?
```

:CALCulate:FSCan:SLIST:ZOOM

Syntax

:CALCulate:FSCan:SLIST:ZOOM <integer>

Description

Takes the midspan frequency as the reference and zooms the coordinate display at the selected signal of the signal table to 10% of the current span.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 2,000	--

Example

The following command takes the midspan frequency as the reference and zooms the coordinate display at the Signal 3 to 10% of the current span.

```
:CALCulate:FSCan:SLIST:ZOOM 3
```

:CALCulate:FSCan:SLIST:ZOOM:OUT

Syntax

:CALCulate:FSCan:SLIST:ZOOM:OUT

Description

Returns the coordinate display of the current signal to its previous display set before the Signal Zoom.

:CALCulate:LLINe:ALL:DELeTe

Syntax

:CALCulate:LLINe:ALL:DELeTe

Description

Deletes all the limit line data.

:CALCulate:LLINe:TEST

Syntax

:CALCulate:LLINe:TEST OFF|ON|0|1

:CALCulate:LLINe:TEST?

Description

Enables or disables the limit line test function.

Queries the setting state of the limit line test function.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command disables the limit line test function.

:CALCulate:LLINe:TEST OFF or :CALCulate:LLINe:TEST 0

The following query returns 0.

:CALCulate:LLINe:TEST?

:CALCulate:LLINe<n>:AMPLitude:CMODE:RELative

Syntax

:CALCulate:LLINe<n>:AMPLitude:CMODE:RELative OFF|ON|0|1

:CALCulate:LLINe<n>:AMPLitude:CMODE:RELative?

Description

Enables or disables the coupling functions between the selected limit line data points and the reference level.

Queries the setting state of the coupling functions between the selected limit line data points and the

reference level.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	--
--	Bool	OFF ON 0 1	OFF 0

Remarks

OFF|0: disables the coupling function. That is, "Fixed" is selected under **Y to Ref**, and the amplitude of the current limit line editing point is not be affected by the reference level.

ON|1: enables the coupling function. That is, "Relative" is selected under **Y to Ref**, and the amplitude of the current editing point is the difference between the amplitude of the point and that of the current reference level. At this time, if the reference level changes, then the position of the current editing point changes along with the reference level.

Return Format

The query returns 0 or 1.

Example

The following command disables the coupling functions between the selected limit line data points and the reference level.

:CALCulate:LLINe2:AMPLitude:CMODE:RELative OFF or :CALCulate:LLINe2:AMPLitude:CMODE:RELative 0

The following query returns 0.

:CALCulate:LLINe2:AMPLitude:CMODE:RELative?

:CALCulate:LLINe<n>:BUILd

Syntax

:CALCulate:LLINe<n>:BUILd TRACE1|TRACE2|TRACE3

Description

Builds the limit line from the selected trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	--
--	Keyword	TRACE1 TRACE2 TRACE3	--

Example

The following command builds Limit Line 2 from Trace2.

:CALCulate:LLINe2:BUILd TRACE2

:CALCulate:LLINe<n>:CONTrol:INTerpolate:TYPE

Syntax

:CALCulate:LLINe<n>:CONTrol:INTerpolate:TYPE LOGarithmic|LINear

:CALCulate:LLINe<n>:CONTrol:INTerpolate:TYPE?

Description

Sets the frequency interpolation mode of the selected limit line.

Queries the frequency interpolation mode of the selected limit line.

Parameter

Name	Type	Range	Default
--	Keyword	LOGarithmic LINear	LINear

Return Format

The query returns LOG or LIN.

Example

The following command sets the frequency interpolation mode of Limit Line 1 to LINear.

```
:CALCulate:LLINe1:CONTRol:INTerpolate:TYPE LINear
```

The following query returns LIN.

```
:CALCulate:LLINe1:CONTRol:INTerpolate:TYPE?
```

:CALCulate:LLINe<n>:COPY**Syntax**

```
:CALCulate:LLINe<n>:COPY LLINE1|LLINE2|LLINE3|LLINE4|LLINE5|LLINE6
```

Description

Copies the selected limit line to the current limit line.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	--
--	Keyword	LLINE1 LLINE2 LLINE3 LLINE4 LLINE5 LLINE6	--

Remarks

If the limit line to be copied that you select is the same as the current limit line, no operation should be performed.

Example

The following command copies Limit Line 1 to Limit Line 2.

```
:CALCulate:LLINe2:COPY LLINE1
```

:CALCulate:LLINe<n>:DATA**Syntax**

```
:CALCulate:LLINe<n>:DATA <x>,<ampl>,<connect>{,<x>,<ampl>,<connect>}
```

```
:CALCulate:LLINe<n>:DATA?
```

Description

Edits one limit line, and marks it with n.

Queries the limit line data that you are editing currently.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	1
<x>	Consecutive Real Number	0 Hz to 3 GHz	--
<ampl>	Consecutive Real Number	-1,000 dBm to 1,000 dBm	--
<connect>	Discrete	0 1	0

Remarks

<x>: indicates frequency.

<apml>: indicates the amplitude. By default, its unit is dBm. The same X value can be configured with at most two amplitude values.

<connect>: can be configured with 1. It indicates that the current point connects with the previous point to determine the limit line.

Return Format

Queries the returned limit line data that you are editing currently.

Example

The following command edits a limit line that contains three points, and marks it Limit Line 2.

```
:CALCulate:LLINe2:DATA 50,100,1,100,150,1,200,200,1
```

The following query returns

```
5.000000000e+01,1.000000000e+02,1,1.000000000e+02,1.500000000e+02,1,2.000000000e+02,2.000000000e+02,1,
```

```
:CALCulate:LLINe2:DATA?
```

:CALCulate:LLINe<n>:DELeTe**Syntax**

```
:CALCulate:LLINe<n>:DELeTe
```

Description

Deletes the selected limit line.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	--

Example

The following command deletes Limit Line 2.

```
:CALCulate:LLINe2:DELeTe
```

:CALCulate:LLINe<n>:DISPlay**Syntax**

```
:CALCulate:LLINe<n>:DISPlay OFF|ON|0|1
```

```
:CALCulate:LLINe<n>:DISPlay?
```

Description

Turns on or off the selected limit line.

Queries the setting state of the selected limit line.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	1
--	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command turns on Limit Line 2.

```
:CALCulate:LLINe2:DISPlay ON or :CALCulate:LLINe2:DISPlay 1
```

The following query returns 1.

```
:CALCulate:LLINe2:DISPlay?
```

:CALCulate:LLINe<n>:FAIL?**Syntax**

```
:CALCulate:LLINe<n>:FAIL?
```

Description

Queries the measurement results of the selected limit line and its associated trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	--

Remarks

If you enable the test for the displayed trace and its corresponding limit line, and each displayed trace has its corresponding limit line enabled, then you can run the command to query whether the trace test passes.

Return Format

The query returns 0 (pass) or 1 (fail).

:CALCulate:LLINe<n>:FREQuency:CMODE:RELative**Syntax**

```
:CALCulate:LLINe<n>:FREQuency:CMODE:RELative OFF|ON|0|1
```

```
:CALCulate:LLINe<n>:FREQuency:CMODE:RELative?
```

Description

Enables or disables the coupling functions between the selected limit line data points and the center frequency.

Queries the setting state of the coupling functions between the selected limit line data points and the center frequency.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	--
--	Bool	OFF ON 0 1	OFF 0

Remarks

OFF|0: disables the coupling function. That is, "Fixed" is selected under **X to CF**, and the frequency of the current limit line editing point is not be affected by the midspan frequency.

ON|1: enables the coupling function. That is, "Relative" is selected under **X to CF**, and the frequency of the current limit line editing point is the difference between the frequency of the point and that of the current midspan frequency. At this time, if the midspan frequency changes, then the position of the current editing point will move left and right with it.

Return Format

The query returns 0 or 1.

Example

The following command disables the coupling functions between data points of Limit Line 2 and the midspan frequency.

```
:CALCulate:LLINe2:FREQuency:CMODE:RELative OFF or :CALCulate:LLINe2:FREQuency:CMODE:RELative 0
```

The following query returns 0.

```
:CALCulate:LLINe2:FREQuency:CMODE:RELative?
```

:CALCulate:LLINe<n>:MARGin**Syntax**

```
:CALCulate:LLINe<n>:MARGin <rel_ampl>
```

```
:CALCulate:LLINe<n>:MARGin?
```

Description

Sets the margin for the selected limit line.

Queries the margin for the selected limit line.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	--
<rel_ampl>	Consecutive Real Number	-40 dB to 0 dB	0 dB

Return Format

The query returns the margin for the limit line in scientific notation.

Example

The following command sets the margin for Limit Line 2 to be 1 dB.

```
:CALCulate:LLINe2:MARGin 1
```

The following query returns 1.000000000e+00.

```
:CALCulate:LLINe2:MARGin?
```

:CALCulate:LLINe<n>:MARGin:STATe**Syntax**

```
:CALCulate:LLINe<n>:MARGin:STATe OFF|ON|0|1
```

```
:CALCulate:LLINe<n>:MARGin:STATe?
```

Description

Enables or disables the margin for the selected limit line.

Queries the setting state of the margin for the selected limit line.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	--
--	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command turns on the margin for Limit Line 2.

:CALCulate:LLINe2:MARGin:STATe ON or :CALCulate:LLINe2:MARGin:STATe 1

The following query returns 1.

:CALCulate:LLINe2:MARGin:STATe?

:CALCulate:LLINe<n>:OFFSet:X**Syntax**

:CALCulate:LLINe<n>:OFFSet:X <freq>

:CALCulate:LLINe<n>:OFFSet:X?

Description

Sets the frequency offset of the specified limit line.

Queries the frequency offset of the specified limit line.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	--
<freq>	Consecutive Real Number	-1 GHz to 1 GHz	0 Hz

Return Format

The query returns the frequency offset in scientific notation.

Example

The following command sets the frequency offset of Limit Line 2 to 5 kHz.

:CALCulate:LLINe2:OFFSet:X 5000

The following query returns 5.000000000e+03.

:CALCulate:LLINe2:OFFSet:X?

:CALCulate:LLINe<n>:OFFSet:Y**Syntax**

:CALCulate:LLINe<n>:OFFSet:Y <re_ampl>

:CALCulate:LLINe<n>:OFFSet:Y?

Description

Sets the amplitude offset of the specified limit line.

Queries the amplitude offset of the specified limit line.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	--
<re_ampl>	Consecutive Real Number	-50 dB to 50 dB	0 dB

Return Format

The query returns the amplitude offset in scientific notation.

Example

The following command sets the amplitude offset of Limit Line 2 to 20 dB.

```
:CALCulate:LLINe2:OFFSet:Y 20
```

The following query returns 2.000000000e+01.

```
:CALCulate:LLINe2:OFFSet:Y?
```

:CALCulate:LLINe<n>:TRACe**Syntax**

```
:CALCulate:LLINe<n>:TRACe 1|2|3
```

```
:CALCulate:LLINe<n>:TRACe?
```

Description

Sets the trace for the current limit line test.

Queries the trace for the current limit line test.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	--
--	Discrete	1 2 3	Refer to "Remarks"

Remarks

Limit Line 1 and 2: The default is Trace 1.

Limit Line 3 and 4: The default is Trace 2.

Limit Line 5 and 6: The default is Trace 3.

Return Format

The query returns 1, 2, or 3.

Example

The following command sets that Trace 2 is tested against Limit Line 3.

```
:CALCulate:LLINe3:TRACe 2
```

The following query returns 2.

```
:CALCulate:LLINe3:TRACe?
```

:CALCulate:MARKer:PEAK:SEARch:THReshold:LINE**Syntax**

```
:CALCulate:MARKer:PEAK:SEARch:THReshold:LINE OFF|ON|0|1
```

```
:CALCulate:MARKer:PEAK:SEARch:THReshold:LINE?
```

Description

Enables or disables the peak threshold line.

Queries the status of the peak threshold line.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command enables the peak threshold line.

:CALCulate:MARKer:PEAK:SEARch:THReshold:LINE ON

or :CALCulate:MARKer:PEAK:SEARch:THReshold:LINE 1

The following query returns 1.

:CALCulate:MARKer:PEAK:SEARch:THReshold:LINE?

:CALCulate:MARKer<n>:LINEs[:STATE]**Syntax**

:CALCulate:MARKer<n>:LINEs[:STATE] OFF|ON|0|1

:CALCulate:MARKer<n>:LINEs[:STATE]?

Description

Enables or disables the marker line of the specified marker.

Queries the status for the marker line of the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--
--	Bool	OFF ON 0 1	OFF 0

Remarks

If the marker is not visible in the selected area, enable the marker line function to extend the marker line to the display area for better observation.

Return Format

The query returns 0 or 1.

Example

The following command enables the marker line of Marker 1.

:CALCulate:MARKer1:LINEs:STATE ON or :CALCulate:MARKer1:LINEs:STATE 1

The following query returns 1.

:CALCulate:MARKer1:LINEs:STATE?

:CALCulate:MARKer<n>:STATE**Syntax**

:CALCulate:MARKer<n>:STATE OFF|ON|0|1

:CALCulate:MARKer<n>:STATE?

Description

Enables or disables the specified marker.

Queries the status of the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--
--	Bool	OFF ON 0 1	OFF 0

Remarks

If the specified marker is disabled currently, by default, the marker mode is "Position" when you send the command to enable the marker.

Return Format

The query returns 0 or 1.

Example

The following command enables Marker 1.

```
:CALCulate:MARKer1:STATe ON or :CALCulate:MARKer1:STATe 1
```

The following query returns 1.

```
:CALCulate:MARKer1:STATe?
```

:CALCulate:MARKer<n>:X**Syntax**

```
:CALCulate:MARKer<n>:X <param>
```

```
:CALCulate:MARKer<n>:X?
```

Description

Sets the frequency of the specified marker.

Queries the frequency of the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--
<param>	Consecutive Real Number	30 MHz to 1 GHz	515 MHz

Return Format

The query returns the frequency of the specified marker in scientific notation.

Example

The following command sets the frequency of Marker 1 to 515 MHz.

```
:CALCulate:MARKer1:X 515000000
```

The following query returns 5.150000000e+08.

```
:CALCulate:MARKer1:X?
```

:CALCulate:MARKer<n>:Y?**Syntax**

```
:CALCulate:MARKer<n>:Y?
```

Description

Queries the amplitude of the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--

:CALCulate:METer:LIMit:ALL:FAIL?**Syntax**

:CALCulate:METer:LIMit:ALL:FAIL?

Description

Queries the measurement results of all the limit lines and their associated meters.

Remarks

If no limit line is set for the meter, the query returns 0.

It is only applicable to the meter whose limit lines are enabled. If one limit line is disabled, then it will not be tested.

Return Format

The query returns 0 (indicating that all the meters are within the limit, and the test is successful) or 1 (indicating that the test is failed).

:CALCulate:METer:POWer[:CURRent]?**Syntax**

:CALCulate:METer:POWer[:CURRent]?

Description

Queries the current power of the meter.

Remarks

If the meter filter is EMI filter and RBW is 1 MHz, and the meter detector type is quasi peak, the query of the corresponding meter power value returns -1.700000000e+02.

If the meter filter is Gauss filter, and the meter detector type is quasi peak, CISPR average, or RMS average, the query of the corresponding meter power value returns -1.700000000e+02.

The query returns the minimum data value (-1.700000000e+02) if the meter is disabled.

Return Format

The query returns the current power values of three meters in scientific notation. The values are separated by commas.

:CALCulate:METer:POWer:PEAK?**Syntax**

:CALCulate:METer:POWer:PEAK?

Description

Queries the peak power of the meter.

Remarks

The query returns the minimum data value if the meter is disabled.

Return Format

The query returns the peak power values of three meters in scientific notation. The values are separated by commas.

:CALCulate:METer<n>:LIMit[:DATA]**Syntax**

```
:CALCulate:METer<n>:LIMit[:DATA] <ampl>
:CALCulate:METer<n>:LIMit[:DATA]?
```

Description

Sets the limits of the specified meter.

Queries the limits of the specified meter.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3	--
<ampl>	Consecutive Real Number	Current amplitude range	80 dBuV

Return Format

The query returns the limits of the specified meter in scientific notation.

Example

The following command sets the limits of Meter 1 to 10 dBm.

```
:CALCulate:METer1:LIMit:DATA 10
```

The following query returns 1.000000000e+01.

```
:CALCulate:METer1:LIMit:DATA?
```

:CALCulate:METer<n>:LIMit:FAIL?**Syntax**

```
CALCulate:METer<n>:LIMit:FAIL?
```

Description

Tests the measurement results of one limit line and its associated specified meter.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3	--

Remarks

This command will execute the test no matter whether the meter or the limit line is enabled.

Return Format

The query returns 0 (indicating that the selected meter is within the limit, and the test is successful) or 1 (indicating that the selected meter exceeds the limit line, and the test is failed).

:CALCulate:METER<n>:LIMIT:STATE**Syntax**

:CALCulate:METER<n>:LIMIT:STATE OFF|ON|0|1

:CALCulate:METER<n>:LIMIT:STATE?

Description

Enables or disables the limit line of the specified meter.

Queries the status of the limit line of the specified meter.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3	--
--	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command enables the limit line of Meter 1.

:CALCulate:METER1:LIMIT:STATE ON or :CALCulate:METER1:LIMIT:STATE 1

The following query returns 1.

:CALCulate:METER1:LIMIT:STATE?

:CALibration Commands

Command List:

- ◆ [:CALibration:\[ALL\]](#)
- ◆ [:CALibration:AUTO](#)

:CALibration:[ALL]

Syntax

:CALibration:[ALL]

Description

Executes self-calibration immediately.

Remarks

If the self-calibration succeeded, the command :CALibration:[ALL]? returns 0; if failed, the command :CALibration:[ALL]? returns 1.

Example

The following command executes the self-calibration immediately.
:CALibration:ALL

:CALibration:AUTO

Syntax

:CALibration:AUTO OFF|ON|0|1
:CALibration:AUTO?

Description

Enables or disables self-calibration.
Query the setting status of auto calibration.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command enables auto calibration.
:CALibration:AUTO ON or :CALibration:AUTO 1

The following query returns 1.
:CALibration:AUTO?

:COUPle Command

Command List:

◆ [:COUPle](#)

:COUPle

Syntax

:COUPle ALL

Description

Sets all the manual/auto settings in the current measurement mode to be "Auto".

:CONFigure Command

Command List:

- ◆ [:CONFigure?](#)
- ◆ [:CONFigure:FSCan](#)

:CONFigure?

Syntax

:CONFigure?

Description

Queries the current measurement function.

Return Format

The query returns FSCan.

:CONFigure:FSCan

Syntax

:CONFigure:FSCan

Description

Sets the spectrum analyzer to the frequency scanning measurement state.

:DISPlay Commands

Command List:

- ◆ [:DISPlay:BACKlight](#)
- ◆ [:DISPlay:ENABle](#)
- ◆ [:DISPlay:FSCan:VIEW:METER:FLINe](#)
- ◆ [:DISPlay:FSCan:VIEW:METER\[:STATe\]](#)
- ◆ [:DISPlay:FSCan:VIEW:WINDow:TRACe:Y\[:SCALe\]:PDIVision](#)
- ◆ [:DISPlay:FSCan:VIEW:WINDow:TRACe:Y\[:SCALe\]:RLEVel](#)
- ◆ [:DISPlay:FSCan:VIEW:WINDow:TRACe:Y\[:SCALe\]:RLEVel:OFFSet](#)
- ◆ [:DISPlay:FSCan:WINDow:MAMarker\[:STATe\]](#)
- ◆ [:DISPlay:GRATicule\[:STATe\]](#)
- ◆ [:DISPlay:HDMI\[:STATe\]](#)
- ◆ [:DISPlay:METER<n>\[:STATe\]](#)
- ◆ [:DISPlay:VIEW:WINDow:TRACe:X:SPACing](#)
- ◆ [:DISPlay:WINDow:TRACe:Y:DLINe](#)
- ◆ [:DISPlay:WINDow:TRACe:Y:DLINe:STATe](#)
- ◆ [:DISPlay\[:WINDow\]:TRACe<n>:MODE](#)

:DISPlay:BACKlight

Syntax

:DISPlay:BACKlight <integer>
:DISPlay:BACKlight?

Description

Sets the brightness of the backlight of LCD.
Queries the brightness of the backlight of LCD.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 100	100

Return Format

The query returns the brightness of the LCD backlight in integer.

Example

The following command sets the brightness of the LCD backlight to be 50.
:DISPlay:BACKlight 50

The following query returns 50.
:DISPlay:BACKlight?

:DISPlay:ENABLE

Syntax

:DISPlay:ENABLE OFF|ON|0|1
:DISPlay:ENABLE?

Description

Enables or disables LCD.
Queries the status of the LCD.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command enables the LCD.
:DISPlay:ENABLE ON or :DISPlay:ENABLE 1

The following query returns 1.
:DISPlay:ENABLE?

:DISPlay:FSCan:VIEW:METER:FLINE**Syntax**

:DISPlay:FSCan:VIEW:METER:FLINE OFF|ON|0|1
:DISPlay:FSCan:VIEW:METER:FLINE?

Description

Enables or disables the display of the meter frequency line.
Queries the display status of the meter frequency line.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command enables the display of the meter frequency line.
:DISPlay:FSCan:VIEW:METER:FLINE ON

The following query returns 1.
:DISPlay:FSCan:VIEW:METER:FLINE?

:DISPlay:FSCan:VIEW:METER[:STATE]**Syntax**

:DISPlay:FSCan:VIEW:METER[:STATE] OFF|ON|0|1
:DISPlay:FSCan:VIEW:METER[:STATE]?

Description

Enables or disables the display of the meter window.
Queries the display status of the meter window.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command enables the display of the meter window.
:DISPlay:FSCan:VIEW:METER:STATE ON or :DISPlay:FSCan:VIEW:METER:STATE 1

The following query returns 1.
:DISPlay:FSCan:VIEW:METER:STATE?

:DISPlay:FSCan:VIEW:WINDow:TRACe:Y[:SCALe]:PDIVision**Syntax**

:DISPlay:FSCan:VIEW:WINDow:TRACe:Y[:SCALe]:PDIVision <rel_ampl>
 :DISPlay:FSCan:VIEW:WINDow:TRACe:Y[:SCALe]:PDIVision?

Description

Sets the Y-axis scale type.

Queries the Y-axis scale type.

Parameter

Name	Type	Range	Default
<rel_ampl>	Consecutive Real Number	0.1 dB to 20 dB	10 dB

Return Format

The query returns the Y-axis scale value in scientific notation.

Example

The following command sets the Y-axis scale value to 15 dB.

:DISPlay:FSCan:VIEW:WINDow:TRACe:Y:SCALe:PDIVision 15

The following query returns 1.500000e+01.

:DISPlay:FSCan:VIEW:WINDow:TRACe:Y:SCALe:PDIVision?

:DISPlay:FSCan:VIEW:WINDow:TRACe:Y[:SCALe]:RLEVel**Syntax**

:DISPlay:FSCan:VIEW:WINDow:TRACe:Y[:SCALe]:RLEVel <real>
 :DISPlay:FSCan:VIEW:WINDow:TRACe:Y[:SCALe]:RLEVel?

Description

Sets the reference level.

Queries the reference level.

Parameter

Name	Type	Range	Default
<real>	Consecutive Real Number	-63.01 dBuV to 136.99 dBuV	106.99 dBuV

Return Format

The query returns the reference level in scientific notation.

Example

The following command sets the reference level to 100 dBuV.

:DISPlay:FSCan:VIEW:WINDow:TRACe:Y:SCALe:RLEVel 100

The following query returns 9.999970004e+01.

:DISPlay:FSCan:VIEW:WINDow:TRACe:Y:SCALe:RLEVel?

:DISPlay:FSCan:VIEW:WINDow:TRACe:Y[:SCALE]:RLEVel:OFFSet**Syntax**

:DISPlay:FSCan:VIEW:WINDow:TRACe:Y[:SCALE]:RLEVel:OFFSet <rel_ampl>
:DISPlay:FSCan:VIEW:WINDow:TRACe:Y[:SCALE]:RLEVel:OFFSet?

Description

Sets the reference level offset.
Queries the reference level offset.

Parameter

Name	Type	Range	Default
<rel_ampl>	Consecutive Real Number	-300 dB to 300 dB	0 dB

Remarks

The offset of the reference level only modifies the reference level and amplitude readout of the marker, but does not change the position of the curve.

Return Format

The query returns the offset of the reference level in scientific notation.

Example

The following command sets the reference level offset to 10 dB.
:DISPlay:FSCan:VIEW:WINDow:TRACe:Y:SCALE:RLEVel:OFFSet 10

The following query returns 1.000000000e+01.
:DISPlay:FSCan:VIEW:WINDow:TRACe:Y:SCALE:RLEVel:OFFSet?

:DISPlay:FSCan:WINDow:MAMarker[:STATe]**Syntax**

:DISPlay:FSCan:WINDow:MAMarker[:STATe] OFF|ON|0|1
:DISPlay:FSCan:WINDow:MAMarker[:STATe]?

Description

Enables or disables the display of the measurement window at the marker.
Queries the display status of the measurement window at the marker.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command enables the display of the measurement window at the marker.
:DISPlay:FSCan:WINDow:MAMarker:STATe ON or :DISPlay:FSCan:WINDow:MAMarker:STATe 1

The following query returns 1.
:DISPlay:FSCan:WINDow:MAMarker:STATe?

:DISPlay:GRATicule[:STATe]

Syntax

:DISPlay:GRATicule[:STATe] OFF|ON|0|1
:DISPlay:GRATicule[:STATe]?

Description

Enables or disables the display of the graticule.
Queries the display of the graticule.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command enables display of the graticule.
:DISPlay:GRATicule:STATe ON or :DISPlay:GRATicule:STATe 1

The following query returns 1.
:DISPlay:GRATicule:STATe?

:DISPlay:HDMI[:STATe]

Syntax

:DISPlay:HDMI[:STATe] OFF|ON|0|1
:DISPlay:HDMI[:STATe]?

Description

Enables or disables HDMI.
Queries the setting state of HDMI.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command enables HDMI.
:DISPlay:HDMI:STATe ON or :DISPlay:HDMI:STATe 1

The following query returns 1.
:DISPlay:HDMI:STATe?

:DISPlay:METer<n>[:STATe]

Syntax

:DISPlay:METer<n>[:STATe] OFF|ON|0|1
:DISPlay:METer<n>[:STATe]?

Description

Enables or disables the specified meter.
Queries the status of the specified meter.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	Refer to "Remarks"

Remarks

The meter1 is enabled by default, while the meter2 and meter3 are disabled by default.

Return Format

The query returns 0 or 1.

Example

The following command enables Meter 2.

:DISPlay:METer2:STATe ON or :DISPlay:METer2:STATe 1

The following query returns 1.

:DISPlay:METer2:STATe?

:DISPlay:VIEW:WINDow:TRACe:X:SPACing

Syntax

:DISPlay:VIEW:WINDow:TRACe:X:SPACing LINear|LOGarithmic
:DISPlay:VIEW:WINDow:TRACe:X:SPACing?

Description

Sets the scale type of X-axis.
Queries the scale type of X-axis.

Parameter

Name	Type	Range	Default
--	Keyword	LINear LOGarithmic	LOGarithmic

Return Format

The query returns LIN or LOG.

Example

The following command sets the scale type of X-axis to Lin.

:DISPlay:VIEW:WINDow:TRACe:X:SPACing LINear

The following query returns LIN.

:DISPlay:VIEW:WINDow:TRACe:X:SPACing?

:DISPlay:WINDow:TRACe:Y:DLINe

Syntax

```
:DISPlay:WINDow:TRACe:Y:DLINe <ampl>
:DISPlay:WINDow:TRACe:Y:DLINe?
```

Description

Sets the position of the display line.
Queries the position of the display line.

Parameter

Name	Type	Range	Default
<ampl>	Consecutive Real Number	Current amplitude range	81.99 dBuV

Remarks

By default, the display line is disabled. When the display line is enabled for the first time, its position is 81.99 dBuV.

Return Format

The query returns the position of the display line in scientific notation.

Example

The following command sets the position of the display line to -10 dBm.

```
:DISPlay:WINDow:TRACe:Y:DLINe -10
```

The following query returns -1.000000000e+01.

```
:DISPlay:WINDow:TRACe:Y:DLINe?
```

:DISPlay:WINDow:TRACe:Y:DLINe:STATe

Syntax

```
:DISPlay:WINDow:TRACe:Y:DLINe:STATe OFF|ON|0|1
:DISPlay:WINDow:TRACe:Y:DLINe:STATe?
```

Description

Turns on or off the display line.
Queries the status of the display line.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command enables the display line.

```
:DISPlay:WINDow:TRACe:Y:DLINe:STATe ON or :DISPlay:WINDow:TRACe:Y:DLINe:STATe 1
```

The following query returns 1.

```
:DISPlay:WINDow:TRACe:Y:DLINe:STATe?
```

:DISPlay[:WINDow]:TRACe<n>:MODE**Syntax**

:DISPlay[:WINDow]:TRACe<n>:MODE WRITe|AVERAge|MAXHold|MINHold
:DISPlay[:WINDow]:TRACe<n>:MODE?

Description

Sets the type of the specified trace.

Queries the type of the specified trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3	--
--	Keyword	WRITe AVERAge MAXHold MINHold	WRITe

Remarks

WRITe: indicates clear/write.

AVERAge: indicates average.

MAXHold: indicates the maximum hold.

MINHold: indicates the minimum hold.

Return Format

The query returns WRIT, AVER, MAXH, or MINH.

Example

The following command sets the type of Trace 1 to Max Hold.

:DISPlay:WINDow:TRACe1:MODE MAXHold

The following query returns MAXH.

:DISPlay:WINDow:TRACe1:MODE?

:FETCh Command

Command List:

◆ [:FETCh:FSCan?](#)

:FETCh:FSCan?

Syntax

:FETCh:FSCan?

Description

Queries the frequency scan measurement results (returns the signal table information).

:FORMat Commands

Command List:

- ◆ [:FORMat:BORDER](#)
- ◆ [:FORMat\[:TRACe\]\[:DATA\]](#)

:FORMat:BORDER

Syntax

```
:FORMat:BORDER NORMal|SWAPped
:FORMat:BORDER?
```

Description

Selects the binary data byte order for data transmission.
Queries the binary data byte order for data transmission.

Parameter

Name	Type	Range	Default
--	Keyword	NORMal SWAPped	NORMal

Remarks

NORMal: indicates that the byte sequence begins with the most significant byte (MSB) and ends with the least significant byte (LSB).
SWAPped: indicates that the byte sequence begins with the least significant byte (LSB) and ends with the most significant byte (MSB).

Return Format

The query returns NORM or SWAP.

Example

The following command queries the binary data byte order for data transmission to be NORMal.
:FORMat:BORDER NORMal

The following query returns NORM.
:FORMat:BORDER?

:FORMat[:TRACe][:DATA]

Syntax

```
:FORMat[:TRACe][:DATA] ASCii|INTeger,32|REAL,32|REAL,64
:FORMat[:TRACe][:DATA]?
```

Description

Sets the input/output format of the trace data.
Queries the input/output format of the trace data.

Parameter

Name	Type	Range	Default
--	Keyword	ASCii INTeger,32 REAL,32 REAL,64	ASCii

Remarks

ASCIi: ASCII characters, separated by commas.

INTEger,32: binary 32-bit integer values.

REAL,32: binary 32-bit real values.

REAL,64: binary 64-bit real values.

Return Format

The query returns ASC,8, INT,32, REAL,32, or REAL,64.

Example

The following command sets the input/output format of the trace data to be REAL,32.

```
:FORMat:TRACe:DATA REAL,32
```

The following query returns REAL,32.

```
:FORMat:TRACe:DATA?
```

IEEE 488.2 Common Commands

IEEE 488.2 common commands are used to operate or query the status registers. For details of the commands, refer to Page "2-81".

:INITiate Commands

Command List:

- ◆ [:INITiate:FSCan:CLEar:IMMediate](#)
- ◆ [:INITiate:PAUSe](#)
- ◆ [:INITiate:RESume](#)
- ◆ [:INITiate1:CONTinuous](#)
- ◆ [:INITiate2:CONTinuous](#)
- ◆ [:INITiate2:IMMediate](#)
- ◆ [:INITiate2:REStart](#)

:INITiate:FSCan:CLEar:IMMediate

Syntax

:INITiate:FSCan:CLEar:IMMediate

Description

Deletes all the signals in the signal table and launches the selected scan sequence.

:INITiate:PAUSe

Syntax

:INITiate:PAUSe

Description

Pauses scan, search, or the final measurement.

:INITiate:RESume

Syntax

:INITiate:RESume

Description

Resumes to scan from the scan point where you pause.

:INITiate1:CONTinuous

Syntax

:INITiate1:CONTinuous OFF|ON|0|1
:INITiate1:CONTinuous?

Description

Sets the measurement mode of the meter to Continuous (ON|1) or Single (OFF|0).
Queries the measurement mode of the meter.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command sets the measurement mode of the meter to CONTinuous.

:INITiate1:CONTinuous ON or :INITiate1:CONTinuous 1

The following query returns 1.

:INITiate1:CONTinuous?

:INITiate2:CONTinuous**Syntax**

:INITiate2:CONTinuous OFF|ON|0|1

:INITiate2:CONTinuous?

Description

Selects continuous (ON|1) or single (OFF|0) sweep mode.

Queries the current sweep mode.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command sets the instrument to sweep continuously.

:INITiate2:CONTinuous ON or :INITiate2:CONTinuous 1

The following query returns 1.

:INITiate2:CONTinuous?

:INITiate2:IMMediate**:INITiate2:REStart****Syntax**

:INITiate2:IMMediate

:INITiate2:REStart

Description

Starts the scan, search, or the final measurement based on the selected scan sequence.

:INSTrument Commands

Command List:

- ◆ [:INSTrument:COUPle:FREQuency:CENTer](#)
- ◆ [:INSTrument:DEFault](#)
- ◆ [:INSTrument:NSElect](#)
- ◆ [:INSTrument\[:SElect\]](#)

:INSTrument:COUPle:FREQuency:CENTer

Syntax

:INSTrument:COUPle:FREQuency:CENTer ALL|NONE

:INSTrument:COUPle:FREQuency:CENTer?

Description

Turns on or off the global center frequency of the instrument.

Queries the setting status of the global center frequency of the instrument.

Parameter

Name	Type	Range	Default
--	Keyword	ALL NONE	NONE

Remarks

NONE: turns off the global center frequency.

ALL: turns on the global center frequency.

If you execute this command in any mode, the center frequency of the current mode is set to the global center frequency. Adjusting the center frequency in a mode, while the global center frequency is on, will modify the global center frequency.

Return Format

The query returns ALL or NONE.

Example

The following command enables the global center frequency of the instrument.

```
:INSTrument:COUPle:FREQuency:CENTer ALL
```

The following query returns ALL.

```
:INSTrument:COUPle:FREQuency:CENTer?
```

:INSTrument:DEFault

Syntax

:INSTrument:DEFault

Description

Resets the parameters of the current mode to be the factory default settings.

:INSTRument:NSElect **:INSTRument[:SElect]**

Syntax

```
:INSTRument:NSElect 1|2|3|4  
:INSTRument:NSElect?  
:INSTRument[:SElect] SA|RTSA|VSA|EMI  
:INSTRument[:SElect]?
```

Description

Selects the working mode of the instrument.
Queries the working mode of the instrument.

Parameter

Name	Type	Range	Default
--	Discrete	1 2 3 4	1
--	Keyword	SA RTSA VSA EMI	SA

Remarks

The above parameters 1|2|3|4 correspond to SA|RTSA|VSA|EMI, respectively.
After running the command of switching the working mode, we recommend you set the timeout value to 8 s, or perform the next operation after a delay of 8 s.

Example

The following command sets the working mode of the instrument to EMI.

```
:INSTRument:NSElect 4  
:INSTRument:SElect EMI
```

The following query returns 4 or EMI.

```
:INSTRument:NSElect?  
:INSTRument:SElect?
```

:MMEMory Commands

Command List:

- ◆ [:MMEMory:DELeTe](#)
- ◆ [:MMEMory:LOAD:CORRection](#)
- ◆ [:MMEMory:LOAD:LIMit](#)
- ◆ [:MMEMory:LOAD:SCAN](#)
- ◆ [:MMEMory:LOAD:SLISt](#)
- ◆ [:MMEMory:LOAD:STATe](#)
- ◆ [:MMEMory:LOAD:TRACe](#)
- ◆ [:MMEMory:LOAD:TRACe:DATA](#)
- ◆ [:MMEMory:MOVE](#)
- ◆ [:MMEMory:STORe:CORRection](#)
- ◆ [:MMEMory:STORe:LIMit](#)
- ◆ [:MMEMory:STORe:SCAN](#)
- ◆ [:MMEMory:STORe:SCReen](#)
- ◆ [:MMEMory:STORe:SLISt](#)
- ◆ [:MMEMory:STORe:STATe](#)
- ◆ [:MMEMory:STORe:TRACe](#)
- ◆ [:MMEMory:STORe:TRACe:DATA](#)

Remarks:

The mode name in the path specified in this manual is "EMI" mode.

:MMEMory:DELeTe

Syntax

:MMEMory:DELeTe <file_name>

Description

Deletes a specified file.

Parameter

Name	Type	Range	Default
<file_name>	ASCII String	--	--

Remarks

<file_name> should contain the path and the filename.

This operation fails if the file with the specified filename does not exist.

Example

The following command deletes the "state1.sta" file in the "/emi/state" folder.

:MMEMory:DELeTe /emi/state/state1.sta

:MMEMory:LOAD:CORRection

Syntax

:MMEMory:LOAD:CORRection 1|2|3|4,<file_name>

Description

Loads the data from the specified file (suffixed with .csv) to carry out amplitude correction.

Parameter

Name	Type	Range	Default
--	Discrete	1 2 3 4	--
<file_name>	ASCII String	--	--

Remarks

The parameter 1|2|3|4 corresponds to ANTenna|CABLe|OTHer|USER.

This operation fails if the file with the specified filename does not exist.

Example

The following command loads the amplitude correction file ANT.csv to the instrument.

:MMEMory:LOAD:CORRection 1,ANT.csv

:MMEMory:LOAD:LIMit

Syntax

:MMEMory:LOAD:LIMit <label>,<file_name>

Description

Loads the edited limit line file (.csv).

Parameter

Name	Type	Range	Default
<label>	Keyword	LLINE1 LLINE2 LLINE3 LLINE4 LLINE5 LLINE6	--
<file_name>	ASCII String	--	--

Remarks

This operation fails if the file with the specified filename does not exist.

Example

The following command loads the limit line file (upp1.csv) to Limit Line 1.
:MMEMory:LOAD:LIMit LLINE1,upp1.csv

:MMEMory:LOAD:SCAN**Syntax**

:MMEMory:LOAD:SCAN <file_name>

Description

Loads the specified scan table file (.csv).

Parameter

Name	Type	Range	Default
<file_name>	ASCII String	--	--

Remarks

This operation fails if the file with the specified filename does not exist.

Example

The following command loads the scan table file (scan1.csv) to the instrument.
:MMEMory:LOAD:SCAN scan.csv

:MMEMory:LOAD:SLIST**Syntax**

:MMEMory:LOAD:SLIST <file_name>

Description

Loads the specified signal table file (.csv).

Parameter

Name	Type	Range	Default
<file_name>	ASCII String	--	--

Remarks

This operation fails if the file with the specified filename does not exist.

Example

The following command loads the signal table file (slist1.csv) to the instrument.
:MMEMory:LOAD:SLIST slist.csv

:MMEMory:LOAD:STATe

Syntax

:MMEMory:LOAD:STATe <file_name>

Description

Loads the specified state file (.sta).

Parameter

Name	Type	Range	Default
<file_name>	ASCII String	--	--

Remarks

This operation fails if the file with the specified filename does not exist.

Example

The following command loads the state file (state1.sta) to the instrument.

:MMEMory:LOAD:STATe state1.sta

:MMEMory:LOAD:TRACe

Syntax

:MMEMory:LOAD:TRACe <label>,<file_name>

Description

Loads the specified trace file (.trs) and the current instrument state.

Parameter

Name	Type	Range	Default
<label>	Keyword	TRACE1 TRACE2 TRACE3	--
<file_name>	ASCII String	--	--

Remarks

This operation fails if the file with the specified filename does not exist.

Example

The following command loads the current instrument state and the trace file (t1.trs) to Trace2.

:MMEMory:LOAD:TRACe TRACE2,t1.trs

:MMEMory:LOAD:TRACe:DATA

Syntax

:MMEMory:LOAD:TRACe:DATA <label>,<file_name>

Description

Loads the specified measurement data file (suffixed with .csv).

Parameter

Name	Type	Range	Default
<label>	Keyword	TRACE1 TRACE2 TRACE3	--
<file_name>	ASCII String	--	--

Remarks

This operation fails if the file with the specified filename does not exist.

Example

The following command loads the measurement data file (trace1.csv) to Trace1.

```
:MMEMory:LOAD:TRACe:DATA TRACE1,trace1.csv
```

:MMEMory:MOVE**Syntax**

```
:MMEMory:MOVE <file_name1>,<file_name2>
```

Description

Renames the specified file <file_name1> as <file_name2>.

Parameter

Name	Type	Range	Default
<file_name1>	ASCII String	--	--
<file_name2>	ASCII String	--	--

Remarks

<file_name1> and <file_name2> should contain the path and the filename.

This operation fails if the file with the specified filename does not exist.

Example

The following command renames the state file (state1.sta) in the folder (/emi/state) as "state2.sta".

```
:MMEMory:MOVE /emi/state/state1.sta,/emi/state/state2.sta
```

:MMEMory:STORe:CORRection**Syntax**

```
:MMEMory:STORe:CORRection 1|2|3|4,<file_name>
```

Description

Saves the amplitude correction data file to the default path ("/mode name"/correction) with a specified filename suffixed with ".csv" by default (you do not have to add the suffix manually).

Parameter

Name	Type	Range	Default
--	Discrete	1 2 3 4	--
<file_name>	ASCII String	--	--

Remarks

The parameter 1|2|3|4 corresponds to ANTenna|CABLe|OTHer|USER.

If the specified file already exists, overwrite it.

Example

The following command saves the amplitude correction data with the filename "ANT" to the folder (/emi/correction).

```
:MMEMory:STORe:CORRection 1,ANT
```

:MMEMory:STORe:LIMit

Syntax

:MMEMory:STORe:LIMit <label>,<file_name>

Description

Saves the currently edited limit line with a specified filename suffixed with ".csv" by default to the default path ("/mode name"/limit).

Parameter

Name	Type	Range	Default
<label>	Keyword	LLINE1 LLINE2 LLINE3 LLINE4 LLINE5 LLINE6	--
<file_name>	ASCII String	--	--

Remarks

If the specified file already exists, overwrite it.

Example

The following command saves Limit Line 1 data with the filename "low" to the folder (/emi/limit).

```
:MMEMory:STORe:LIMit LLINE1,low
```

:MMEMory:STORe:SCAN

Syntax

:MMEMory:STORe:SCAN <filename>

Description

Saves the scan table with a specified filename suffixed with ".csv" by default to the default path ("/mode name"/scantable).

Parameter

Name	Type	Range	Default
<file_name>	ASCII String	--	--

Remarks

If the specified file already exists, overwrite it.

Example

The following command saves the scan table with the filename "scantable1" to the folder (/emi/scantable).

```
:MMEMory:STORe:SCAN scantable1
```

:MMEMory:STORe:SCReen

Syntax

:MMEMory:STORe:SCReen <file_name>

Description

Saves the current screen image with the specified filename suffixed with ".jpg", ".png/", or ".bmp" to the default path ("/mode name"/screen).

Parameter

Name	Type	Range	Default
<file_name>	ASCII String	--	--

Remarks

If the specified file already exists, overwrite it.

If a suffix (.jpg/.png/.bmp) is added to the filename, you can save the current screen image with a different format based on its different suffix.

If no suffix is added to the filename, then by default, the current screen image is saved in the currently selected format.

Example

The following command saves the current screen image with the filename "screen.jpg" to the folder (/emi/screen).

```
:MMEMory:STORe:SCReen screen.jpg
```

:MMEMory:STORe:SLISt**Syntax**

```
:MMEMory:STORe:SLISt <filename>
```

Description

Saves the signal table with a specified filename suffixed with ".csv" by default to the default path ("/mode name"/signaltable).

Parameter

Name	Type	Range	Default
<file_name>	ASCII String	--	--

Remarks

If the specified file already exists, overwrite it.

Example

The following command saves the signal table with the filename "signaltable1" to the folder (/emi/signaltable).

```
:MMEMory:STORe:SLISt signaltable1
```

:MMEMory:STORe:STATe**Syntax**

```
:MMEMory:STORe:STATe <file_name>
```

Description

Saves the current instrument state with the specified filename suffixed with ".sta" to the default path ("/mode name"/state).

Parameter

Name	Type	Range	Default
<file_name>	ASCII String	--	--

Remarks

If the specified file already exists, overwrite it.

Example

The following command saves the current instrument state with the filename "state.sta" to the folder (/emi/state).

```
:MMEMory:STORe:STATe state
```

:MMEMory:STORe:TRACe**Syntax**

```
:MMEMory:STORe:TRACe <label>,<file_name>
```

Description

Saves the specified trace+state file with filename suffixed with ".trs" to the default path ("/mode name"/tracestate).

Parameter

Name	Type	Range	Default
<label>	Keyword	TRACE1 TRACE2 TRACE3	--
<file_name>	ASCII String	--	--

Remarks

If the specified file already exists, overwrite it.

Example

The following command saves the current instrument state and Trace 1 with the filename "mystate.trs" to the folder (/emi/tracestate).

```
:MMEMory:STORe:TRACe TRACE1,mystate
```

:MMEMory:STORe:TRACe:DATA**Syntax**

```
:MMEMory:STORe:TRACe:DATA <label>,<file_name>
```

Description

Saves the trace measurement results with a specified filename suffixed with ".csv" to the default path ("/mode name"/measdata).

Parameter

Name	Type	Range	Default
<label>	Keyword	TRACE1 TRACE2 TRACE3	--
<file_name>	ASCII String	--	--

Remarks

If the specified file already exists, overwrite it.

Example

The following command saves Trace1 measurement data with the specified filename "mydata.csv" to the folder (/emi/measdata).

```
:MMEMory:STORe:TRACe:DATA TRACE1,mydata
```

[[:SENSe] Commands

Command List:

- ◆ [\[:SENSe\]:AVERage:COUNT](#)
- ◆ [\[:SENSe\]:AVERage:TYPE](#)
- ◆ [\[:SENSe\]:AVERage:TYPE:AUTO](#)
- ◆ [\[:SENSe\]:BANDwidth|BWIDth:EMIFilter:STATe](#)
- ◆ [\[:SENSe\]:BANDwidth|BWIDth\[:RESolution\]](#)
- ◆ [\[:SENSe\]:BANDwidth|BWIDth\[:RESolution\]:AUTO](#)
- ◆ [\[:SENSe\]:CORRection:CSET:ALL:DELeTe](#)
- ◆ [\[:SENSe\]:CORRection:CSET:ALL\[:STATe\]](#)
- ◆ [\[:SENSe\]:CORRection:CSET<n>:DATA](#)
- ◆ [\[:SENSe\]:CORRection:CSET<n>:DATA:MERGE](#)
- ◆ [\[:SENSe\]:CORRection:CSET<n>:DELeTe](#)
- ◆ [\[:SENSe\]:CORRection:CSET<n>\[:STATe\]](#)
- ◆ [\[:SENSe\]:CORRection:CSET<n>:X:SPACing](#)
- ◆ [:INPut:IMPedance](#)
- ◆ [\[:SENSe\]:CORRection:IMPedance\[:INPut\]\[:MAGNitude\]](#)
- ◆ [\[:SENSe\]:CORRection:SA\[:RF\]:GAIN](#)
- ◆ [\[:SENSe\]:DETEctor:TRACe<n>:AUTO](#)
- ◆ [\[:SENSe\]:EMC:STANdard\[:SElect\]](#)
- ◆ [\[:SENSe\]:FREQuency:CENTer](#)
- ◆ [\[:SENSe\]:FREQuency:MIDSpan](#)
- ◆ [\[:SENSe\]:FREQuency:SPAN](#)
- ◆ [\[:SENSe\]:FREQuency:STARt](#)
- ◆ [\[:SENSe\]:FREQuency:STARt:AUTO](#)
- ◆ [\[:SENSe\]:FREQuency:STOP](#)
- ◆ [\[:SENSe\]:FREQuency:STOP:AUTO](#)
- ◆ [\[:SENSe\]:FSCan:DETEctor:TRACe<n>](#)
- ◆ [\[:SENSe\]:FSCan:FINAl:DETEctor<n>](#)
- ◆ [\[:SENSe\]:FSCan:FINAl:DETEctor<n>:DWELl](#)
- ◆ [\[:SENSe\]:FSCan:FINAl:DETEctor<n>:LDELta](#)
- ◆ [\[:SENSe\]:FSCan:MARKer:COUPle:METER](#)
- ◆ [\[:SENSe\]:FSCan:SCAN:ABORT](#)
- ◆ [\[:SENSe\]:FSCan:SCAN<n>:BANDwidth|BWIDth:EMIFilter:STATe](#)
- ◆ [\[:SENSe\]:FSCan:SCAN<n>:BANDwidth\[:RESolution\]](#)
- ◆ [\[:SENSe\]:FSCan:SCAN<n>:BANDwidth\[:RESolution\]:AUTO](#)
- ◆ [\[:SENSe\]:FSCan:SCAN<n>:INPut:ATTenuation](#)
- ◆ [\[:SENSe\]:FSCan:SCAN<n>:INPut:ATTenuation:AUTO](#)

- ◆ [\[:SENSe\]:FSCan:SCAN<n>:POINT](#)
- ◆ [\[:SENSe\]:FSCan:SCAN<n>:POWer:GAIN\[:STATe\]](#)
- ◆ [\[:SENSe\]:FSCan:SCAN<n>:START](#)
- ◆ [\[:SENSe\]:FSCan:SCAN<n>:STATe](#)
- ◆ [\[:SENSe\]:FSCan:SCAN<n>:STOP](#)
- ◆ [\[:SENSe\]:FSCan:SCAN<n>:TIME](#)
- ◆ [\[:SENSe\]:FSCan:SCAN<n>:TIME:AUTO](#)
- ◆ [\[:SENSe\]:FSCan:SEARch:MODE](#)
- ◆ [\[:SENSe\]:FSCan:SEARch:PEAK:COUNt](#)
- ◆ [\[:SENSe\]:FSCan:SEARch:PEAK:COUNt:STATe](#)
- ◆ [\[:SENSe\]:FSCan:SEARch:SUBRange:COUNt](#)
- ◆ [\[:SENSe\]:FSCan:SEQuence](#)
- ◆ [\[:SENSe\]:FSCan:SEQuence:REMeasure](#)
- ◆ [\[:SENSe\]:FSCan:SLISt:COUPle:METER](#)
- ◆ [\[:SENSe\]:FSCan:TRACe:TYPE](#)
- ◆ [\[:SENSe\]:METER:DETEctor:DWELl](#)
- ◆ [\[:SENSe\]:METER:PHOLd:ADJutable](#)
- ◆ [\[:SENSe\]:METER:PHOLd:RESet](#)
- ◆ [\[:SENSe\]:METER:PHOLd:TYPE](#)
- ◆ [\[:SENSe\]:METER<n>:DETEctor](#)
- ◆ [\[:SENSe\]:POWer\[:RF\]:ATTenuation](#)
- ◆ [\[:SENSe\]:POWer\[:RF\]:GAIN\[:STATe\]](#)

[:SENSe]:AVERAge:COUNT

Syntax

```
[ :SENSe]:AVERAge:COUNT <integer>
[ :SENSe]:AVERAge:COUNT?
```

Description

Sets the trace average count of the current measurement.
Queries the trace average count of the current measurement.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 10,000	1

Return Format

The query returns the average count in integer.

Example

The following command sets the average count to 100.
:SENSe:AVERAge:COUNT 100

The following query returns 100.
:SENSe:AVERAge:COUNT?

[:SENSe]:AVERAge:TYPE

Syntax

```
[ :SENSe]:AVERAge:TYPE LOG|RMS|SCALar
[ :SENSe]:AVERAge:TYPE?
```

Description

Selects the average type of the swept SA analysis measurement.
Queries the average type of the swept SA analysis measurement.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3	--
--	Keyword	LOG RMS SCALar	SCALar

Remarks

LOG: indicates log.
RMS: indicates root mean square.
SCALar: indicates scalar.

Return Format

The query returns LOG, RMS, or SCAL.

Example

The following command selects the average type of the swept SA analysis mode to LOG.
:SENSe:AVERAge:TYPE LOG

The following query returns LOG.
:SENSe:AVERAge:TYPE?

[[:SENSe]:AVERage:TYPE:AUTO

Syntax

```
[[:SENSe]:AVERage:TYPE:AUTO OFF|ON|0|1  
[:SENSe]:AVERage:TYPE:AUTO?
```

Description

Enables or disables the auto state for the average type of the current measurement.
Queries the on/off auto state for the average type of the current measurement.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command enables the auto state for the average type of the current measurement.
:SENSe:AVERage:TYPE:AUTO ON or :SENSe:AVERage:TYPE:AUTO 1

The following query returns 1.
:SENSe:AVERage:TYPE:AUTO?

[[:SENSe]:BANDwidth | BWIDth:EMIFilter:STAtE

Syntax

```
[[:SENSe]:BANDwidth|BWIDth:EMIFilter:STAtE OFF|ON|0|1  
[:SENSe]:BANDwidth|BWIDth:EMIFilter:STAtE?
```

Description

Enables or disables the EMI filter.
Queries the status of the EMI filter.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	ON 1

Remarks

ON: selects the EMI filter (-6 dB bandwidth).
OFF: selects the Gaussian filter (-3 dB bandwidth).

Return Format

The query returns 0 or 1.

Example

The following command selects the EMI filter.
:SENSe:BANDwidth:EMIFilter:STAtE ON or :SENSe:BANDwidth:EMIFilter:STAtE 1
:SENSe:BWIDth:EMIFilter:STAtE ON or :SENSe:BWIDth:EMIFilter:STAtE 1

The following query returns 1.
:SENSe:BANDwidth:EMIFilter:STAtE?
:SENSe:BWIDth:EMIFilter:STAtE?

[[:SENSe]:BANDwidth | BWIDth[:RESolution]

Syntax

```
[[:SENSe]:BANDwidth|BWIDth[:RESolution] <freq>
[:SENSe]:BANDwidth|BWIDth[:RESolution]?
```

Description

Sets the resolution bandwidth (RBW) of the meter frequency.
Queries the resolution bandwidth of the meter frequency.

Parameter

Name	Type	Range	Default
<freq>	Discrete	100 Hz to 10 MHz (at 1-3-10 step)	120 kHz

Remarks

When the EMC measurement standard is "None" and "Gauss" filter is selected, the RBW range is as above.

When "EMI" filter is selected, resolution bandwidth can only be 200 Hz, 9 kHz, 120 kHz, or 1 MHz.

Return Format

The query returns the resolution bandwidth in scientific notation. Its unit is Hz.

Example

The following command sets RBW to 1000 Hz.

```
:SENSe:BANDwidth:RESolution 1000
```

```
:SENSe:BWIDth:RESolution 1000
```

The following query returns 1.000000000e+03.

```
:SENSe:BANDwidth:RESolution?
```

```
:SENSe:BWIDth:RESolution?
```

[[:SENSe]:BANDwidth | BWIDth[:RESolution]:AUTO

Syntax

```
[[:SENSe]:BANDwidth|BWIDth[:RESolution]:AUTO OFF|ON|0|1
[:SENSe]:BANDwidth|BWIDth[:RESolution]:AUTO?
```

Description

Enables or disables the auto setting mode of the meter RBW.

Queries the status of the auto setting mode of the meter RBW.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	ON 1

Remarks

OFF: indicates "Manual" mode. You can use the [\[:SENSe\]:BANDwidth|BWIDth\[:RESolution\]](#) command to set the RBW value.

ON: indicates "Auto" mode. The RBW automatically couple to the frequency of the meter.

Frequency (Meter) Fmet	RBW
Fmet < 150 kHz	200 Hz
150 kHz ≤ Fmet < 30 MHz	9 kHz
30 MHz ≤ Fmet < 1 GHz	120 kHz
Fmet ≥ 1 GHz	1 MHz

When the EMC measurement standard is "None", this command is invalid. When the EMC measurement standard is "CISPR", select the Auto RBW mode by default.

Return Format

The query returns 0 or 1.

Example

The following command enables the auto setting mode of RBW.

:SENSe:BANDwidth:RESolution:AUTO ON or :SENSe:BANDwidth:RESolution:AUTO 1

:SENSe:BWIDth:RESolution:AUTO ON or :SENSe:BWIDth:RESolution:AUTO 1

The following query returns 1.

:SENSe:BANDwidth:RESolution:AUTO?

:SENSe:BWIDth:RESolution:AUTO?

[:SENSe]:CORRection:CSET:ALL:DELeTe

Syntax

[:SENSe]:CORRection:CSET:ALL:DELeTe

Description

Deletes all the amplitude correction data.

[:SENSe]:CORRection:CSET:ALL[:STATe]

Syntax

[:SENSe]:CORRection:CSET:ALL[:STATe] OFF|ON|0|1

[:SENSe]:CORRection:CSET:ALL[:STATe]?

Description

Enables or disables all the amplitude correction functions.

Queries the status of the amplitude correction function.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	OFF 0

Remarks

When the function is disabled, settings for all the corrections are disabled.

When the function is enabled, settings for all the corrections are enabled, and the "Antenna" correction is enabled by default.

To enable or disable settings for each correction, refer to the [\[:SENSe\]:CORRection:CSET<n>\[:STATe\]](#) command.

Return Format

The query returns 0 or 1.

Example

The following command enables the amplitude correction function.

:SENSe:CORRection:CSET:ALL:STATe ON or :SENSe:CORRection:CSET:ALL:STATe 1

The following query returns 1.

:SENSe:CORRection:CSET:ALL:STATe?

[[:SENSe]:CORRection:CSET<n>:DATA

Syntax

```
[[:SENSe]:CORRection:CSET<n>:DATA <x>,<ampl>,{<x>,<ampl>}
[:SENSe]:CORRection:CSET<n>:DATA?
```

Description

Creates an amplitude correction curve by using the specified data.
Queries the specified amplitude correction data.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4	--
<x>	Consecutive Real Number	0 Hz to 3 GHz	--
<ampl>	Consecutive Real Number	-120 dBm to +100 dBm	--

Remarks

<n>: 1 indicates antenna; 2 indicates cable; 3 indicates other, and 4 indicates user.
The range for the number of editing points is from 1 to 200.

Return Format

The query returns the specified amplitude correction data in <x>,<ampl>,{<x>,<ampl>} format.

Example

The following command creates an amplitude correction curve.

```
:SENSe:CORRection:CSET1:DATA 900E6,0.3,1.0E9,0.35,1.3E9,0.2
```

The following query returns 9.000000000e+08,3.000000000e-01,1.000000000e+09,3.500000000e-01,1.300000000e+09,2.000000000e-01.

```
:SENSe:CORRection:CSET1:DATA?
```

[[:SENSe]:CORRection:CSET<n>:DATA:MERGe

Syntax

```
[[:SENSe]:CORRection:CSET<n>:DATA:MERGe <x>,<ampl>,{<x>,<ampl>}
```

Description

Adds correction data to the current correction curve.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4	--
<x>	Consecutive Real Number	0 Hz to 3 GHz	--
<ampl>	Consecutive Real Number	-120 dBm to +100 dBm	--

Remarks

<n>: 1 indicates antenna; 2 indicates cable; 3 indicates other, and 4 indicates user.
The range for the number of editing points is from 1 to 200.

Return Format

The query returns the added amplitude correction data in <x>,<ampl>,{<x>,<ampl>} format.

Example

The following command adds two points to the current correction curve.

```
:SENSe:CORRection:CSET1:DATA 900E6,0.3,1.0E9,0.35
```

[:SENSe]:CORRection:CSET<n>:DELeTe

Syntax

[:SENSe]:CORRection:CSET<n>:DELeTe

Description

Deletes the specified amplitude correction setting.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4	--

Remarks

<n>: 1 indicates antenna; 2 indicates cable; 3 indicates other, and 4 indicates user.

Example

The following command deletes the antenna correction setting.

```
:SENSe:CORRection:CSET1:DELeTe
```

[:SENSe]:CORRection:CSET<n>[:STATe]

Syntax

[:SENSe]:CORRection:CSET<n>[:STATe] OFF|ON|0|1

[:SENSe]:CORRection:CSET<n>[:STATe]?

Description

Enables or disables the specified amplitude correction function.

Queries the status of the specified amplitude correction function.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4	--
--	Bool	OFF ON 0 1	OFF 0

Remarks

<n>: 1 indicates antenna; 2 indicates cable; 3 indicates other, and 4 indicates user.

Return Format

The query returns 0 or 1.

Example

The following command disables the "Antenna" amplitude correction function.

```
:SENSe:CORRection:CSET1:STATe OFF or :SENSe:CORRection:CSET1:STATe 0
```

The following query returns 0.

```
:SENSe:CORRection:CSET1:STATe?
```

[:SENSe]:CORRection:CSET<n>:X:SPACing

Syntax

[:SENSe]:CORRection:CSET<n>:X:SPACing LINear|LOGarithmic

[:SENSe]:CORRection:CSET<n>:X:SPACing?

Description

Selects the frequency interpolation mode for amplitude correction.
Queries the frequency interpolation mode for amplitude correction.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4	--
--	Discrete	LINear LOGarithmic	LINear

Remarks

<n>: 1 indicates antenna; 2 indicates cable; 3 indicates other, and 4 indicates user.

In Lin mode, linear interpolation is adopted for the frequency, and log interpolation is adopted for the amplitude.

In Log mode, for both of frequency and amplitude, we interpolate on a log scale.

Return Format

The query returns LIN or LOG.

Example

The following command sets the frequency interpolation mode to LINear.

```
:SENSe:CORRection:CSET1:X:SPACing LINear
```

The following query returns LIN.

```
:SENSe:CORRection:CSET1:X:SPACing?
```

:INPut:IMPedance**[:SENSe]:CORRection:IMPedance[:INPut][:MAGNitude]****Syntax**

```
:INPut:IMPedance 50|75
```

```
:INPut:IMPedance?
```

```
[ :SENSe]:CORRection:IMPedance[:INPut][:MAGNitude] 50|75
```

```
[ :SENSe]:CORRection:IMPedance[:INPut][:MAGNitude]?
```

Description

Sets the input impedance for voltage-to-power conversion. The unit is Ω .

Queries the input impedance for voltage-to-power conversion.

Parameter

Name	Type	Range	Default
--	Discrete	50 75	50

Remarks

If the output impedance of the system under measurement is 75 Ω , you should use a 75 Ω to 50 Ω adapter (option) supplied by RIGOL to connect the analyzer with the system under test, and then set the input impedance to 75 Ω .

Return Format

The query returns 50 or 75.

Example

The following command sets the input impedance is 75 Ω .

```
:INPut:IMPedance 75 or :SENSe:CORRection:IMPedance:INPut:MAGNitude 75
```

The following query returns 75.

:INPut:IMPedance? or :SENSe:CORRection:IMPedance:INPut:MAGNitude?

[:SENSe]:CORRection:SA[:RF]:GAIN

Syntax

[:SENSe]:CORRection:SA[:RF]:GAIN <rel_ampl>

[:SENSe]:CORRection:SA[:RF]:GAIN?

Description

Sets the external gain.

Queries the external gain.

Parameter

Name	Type	Range	Default
<rel_ampl>	Consecutive Real Number	-120 dB to 120 dB	0 dB

Return Format

The query returns the external gain value in scientific notation. The unit is dB.

Example

The following command set the external gain value to 20 dB.

:SENSe:CORRection:SA:RF:GAIN 20

The following query returns 2.000000000e+01.

:SENSe:CORRection:SA:RF:GAIN?

[:SENSe]:DETEctor:TRACe<n>:AUTO

Syntax

[:SENSe]:DETEctor:TRACe<n>:AUTO OFF|ON|0|1

[:SENSe]:DETEctor:TRACe<n>:AUTO?

Description

Enables or disables the Detector Auto function for the specified trace.

Queries the status of the Detector Auto function for the specified trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3	1
--	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command enables the Detector Auto function for Trace 1.

:SENSe:DETEctor:TRACe1:AUTO ON or :SENSe:DETEctor:TRACe1:AUTO 1

The following query returns 1.

:SENSe:DETEctor:TRACe1:AUTO?

[[:SENSe]:EMC:STANdard[:SElect]

Syntax

[[:SENSe]:EMC:STANdard[:SElect] NONE|CISPr
[:SENSe]:EMC:STANdard[:SElect]?

Description

Sets the EMC standard.

Queries the EMC standard.

Parameter

Name	Type	Range	Default
--	Discrete	NONE CISPr	CISPr

Return Format

The query returns NONE or CISPr.

Example

The following command sets the EMC standard to CISPr.

```
:SENSe:EMC:STANdard:SElect CISPr
```

The following query returns CISPr.

```
:SENSe:EMC:STANdard:SElect?
```

[[:SENSe]:FREQuency:CENTer

Syntax

[[:SENSe]:FREQuency:CENTer <freq>
[:SENSe]:FREQuency:CENTer?

Description

Sets the frequency of the meter.

Queries the frequency of the meter.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	0 Hz to Fmax ^[1]	515 MHz

Note^[1]: The maximum measurement frequency Fmax is determined by the instrument model. For RSA3030E, Fmax is 3 GHz; for RSA3015E, Fmax is 1.5 GHz.

Return Format

The query returns the frequency of the meter in scientific notation. The unit is Hz.

Example

The following command sets the frequency of the meter to 1 MHz.

```
:SENSe:FREQuency:CENTer 1000000
```

The following query returns 1.000000000e+06.

```
:SENSe:FREQuency:CENTer?
```

[[:SENSe]:FREQuency:MIDSpan

Syntax

[[:SENSe]:FREQuency:MIDSpan <freq>
[:SENSe]:FREQuency:MIDSpan?

Description

Sets the midspan center frequency.
Queries the midspan center frequency.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	5 kHz to (Fmax - 5 kHz)	515 MHz

Return Format

The query returns the midspan center frequency in scientific notation. The unit is Hz.

Example

The following command sets the midspan center frequency to 1 MHz.
:SENSe:FREQuency:MIDSpan 1000000

The following query returns 1.000000000e+06.
:SENSe:FREQuency:MIDSpan?

[[:SENSe]:FREQuency:SPAN

Syntax

[[:SENSe]:FREQuency:SPAN <freq>
[:SENSe]:FREQuency:SPAN?

Description

Sets the span of the analyzer.
Queries the span.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	10 Hz to Fmax	970 MHz

Return Format

The query returns the span in scientific notation. Its unit is Hz.

Example

The following command sets the span to 20 MHz.
:SENSe:FREQuency:SPAN 20000000

The following query returns 2.000000000e+07.
:SENSe:FREQuency:SPAN?

[[:SENSe]:FREQuency:START

Syntax

[[:SENSe]:FREQuency:START <freq>
[[:SENSe]:FREQuency:START?

Description

Sets the start frequency.

Queries the start frequency.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	0 Hz to (Fmax - 10 Hz)	midspan frequency - span/2

Return Format

The query returns the start frequency in scientific notation. The unit is Hz.

Example

The following command sets the start frequency to 100 MHz.

:SENSe:FREQuency:START 100000000

The following query returns 1.000000000e+08.

:SENSe:FREQuency:START?

[[:SENSe]:FREQuency:START:AUTO

Syntax

[[:SENSe]:FREQuency:START:AUTO ON|OFF|1|0
[[:SENSe]:FREQuency:START:AUTO?

Description

Enables or disables the auto coupling mode of start frequency.

Queries the status of the auto coupling mode of start frequency.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command enables the auto coupling mode of start frequency.

:SENSe:FREQuency:START:AUTO ON or :SENSe:FREQuency:START:AUTO 1

The following query returns 1.

:SENSe:FREQuency:START:AUTO?

[[:SENSe]:FREQuency:STOP

Syntax

[[:SENSe]:FREQuency:STOP <freq>
[:SENSe]:FREQuency:STOP?

Description

Sets the stop frequency.
Queries the stop frequency.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	10 Hz to Fmax	midspan frequency + span/2

Return Format

The query returns the stop frequency in scientific notation. The unit is Hz.

Example

The following command sets the stop frequency to 10 MHz.
:SENSe:FREQuency:STOP 10000000

The following query returns 1.000000000e+07.
:SENSe:FREQuency:STOP?

[[:SENSe]:FREQuency:STOP:AUTO

Syntax

[[:SENSe]:FREQuency:STOP:AUTO ON|OFF|1|0
[:SENSe]:FREQuency:STOP:AUTO?

Description

Enables or disables the auto coupling mode of stop frequency.
Queries the status of the auto coupling mode of stop frequency.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command enables the auto coupling mode of stop frequency.
:SENSe:FREQuency:STOP:AUTO ON or :SENSe:FREQuency:STOP:AUTO 1

The following query returns 1.
:SENSe:FREQuency:STOP:AUTO?

[[:SENSe]:FSCan:DETECTOR:TRACe<n>

Syntax

[[:SENSe]:FSCan:DETECTOR:TRACe<n> AVERage|NEGative|POSitive|CAVerage |QPEak|RAVerage
[:SENSe]:FSCan:DETECTOR:TRACe<n>?

Description

Sets the detector type for the specified trace.

Queries the detector type for the specified trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3	1
--	Keyword	AVERage NEGative POSitive CAVerage QPEak RAVerage	POSitive

Remarks

AVERage: indicates the voltage average.

NEGative: indicates the negative peak.

POSitive: indicates the positive peak.

CAVerage: indicates the CISPR average.

QPEak: indicates the quasi-peak.

RAVerage: indicates the RMS average.

Return Format

The query returns AVER, NEG, POS, CAV, QPE, or RAV.

Example

The following command sets the detector type of Trace 1 to Positive.

```
:SENSe:FSCan:DETECTOR:TRACe1 POSitive
```

The following query returns POS.

```
:SENSe:FSCan:DETECTOR:TRACe1?
```

[[:SENSe]:FSCan:FINAL:DETECTOR<n>

Syntax

[[:SENSe]:FSCan:FINAL:DETECTOR<n> POSitive|QPEak|CAVerage|RAVerage|AVERage|NEGative|OFF
[:SENSe]:FSCan:FINAL:DETECTOR<n>?

Description

Sets the detector type of the specified detector in the final measurement.

Queries the detector type of the specified detector in the final measurement.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3	1
--	Keyword	POSitive QPEak CAVerage RAVerage AVERage NEGative OFF	Refer to " Remarks "

Remarks

POSitive: indicates the positive peak.

QPEak: indicates the quasi-peak.

CAVerage: indicates the CISPR average.

RAverage: indicates the RMS average.

AVERage: indicates the voltage average.

NEGative: indicates the negative peak.

OFF: indicates disabling the detector.

By default, the detector 1 type is positive peak; the detector 2 type is quasi peak; the detector 3 type is CISPR average.

Return Format

The query returns POS, QPE, CAV, RAV, AVER, NEG, or OFF.

Example

The following command sets the detector type of Detector 1 in the final measurement to POSitive.

```
:SENSe:FSCan:FINal:DETEctor1 POSitive
```

The following query returns POS.

```
:SENSe:FSCan:FINal:DETEctor1?
```

[:SENSe]:FSCan:FINal:DETEctor<n>:DWELI

Syntax

```
[ :SENSe ]:FSCan:FINal:DETEctor<n>:DWELI <dwel Time>
```

```
[ :SENSe ]:FSCan:FINal:DETEctor<n>:DWELI?
```

Description

Sets the dwell time of the specified detector in the final measurement.

Queries the dwell time of the specified detector in the final measurement.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3	1
<dwel Time>	Consecutive Real Number	Refer to "Remarks"	Refer to "Remarks"

Remarks

By default, the detector 1 dwell time is 200 ms; the detector 2 dwell time is 1 s; the detector 3 dwell time is 1 s.

The maximum dwell time is 60 s, and the minimum value depends on the detector type.

When the quasi peak detector is selected, the minimum dwell time is 0.5 ms. When the CISPR average or RMS average detector is selected, the minimum dwell time is 0.1 ms. When the positive peak or negative peak detector is selected, the minimum dwell time is depends on the smallest RBW among ranges turned on in the scan table.

RBW	Minimum Dwell Time
100 Hz ≤ RBW < 200 Hz	1 ms
200 Hz < RBW < 1 kHz	100 us
1 kHz ≤ RBW < 100 kHz	100 us
RBW ≥ 100 kHz	50 us

Return Format

The query returns the dwell time in scientific notation. The unit is s.

Example

The following command sets the dwell time of Detector 1 in the final measurement to 0.1 s.

```
:SENSe:FSCan:FINal:DETEctor1:DWELI 0.1
```

The following query returns 1.000000000e-01.

```
:SENSe:FSCan:FINal:DETEctor1:DWELI?
```

[[:SENSe]:FSCan:FINal:DETEctor<n>:LDELta

Syntax

[[:SENSe]:FSCan:FINal:DETEctor<n>:LDELta <limit_Num>
[[:SENSe]:FSCan:FINal:DETEctor<n>:LDELta?

Description

Sets the limit line used by the specified detector in the final measurement.
Queries the limit line used by the specified detector in the final measurement.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3	1
<limit_Num>	Discrete	1 2 3 4 5 6	1

Return Format

The query returns the limit line used by the specified detector.

Example

The following command sets the limit line used by Detector 1 in the final measurement to Limit Line 2.
:SENSe:FSCan:FINal:DETEctor1:LDELta 2

The following query returns 2.
:SENSe:FSCan:FINal:DETEctor1:LDELta?

[[:SENSe]:FSCan:MARKer:COUPle:METER

Syntax

[[:SENSe]:FSCan:MARKer:COUPle:METER OFF|ON|0|1
[[:SENSe]:FSCan:MARKer:COUPle:METER?

Description

Enables or disables the coupling function between the meter and the marker.
Queries the status of the coupling function between the meter and the marker.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command enables the coupling function between the meter and the marker.
:SENSe:FSCan:MARKer:COUPle:METER ON or :SENSe:FSCan:MARKer:COUPle:METER 1

The following query returns 1.
:SENSe:FSCan:MARKer:COUPle:METER?

[[:SENSe]:FSCan:SCAN:ABORT

Syntax

[[:SENSe]:FSCan:SCAN:ABORT

Description

Stops the current scan sequence.

[[:SENSe]:FSCan:SCAN<n>:BANDwidth | BWIDth:EMIFilter:STATe

Syntax

[[:SENSe]:FSCan:SCAN<n>:BANDwidth|BWIDth:EMIFilter:STATe OFF|ON|0|1

[[:SENSe]:FSCan:SCAN<n>:BANDwidth|BWIDth:EMIFilter:STATe?

Description

Enables or disables the EMI filter within the specified range.

Queries the status of the EMI filter within the specified range.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8 9 10	3 4 5
--	Bool	OFF ON 0 1	ON 1

Remarks

ON: selects the EMI filter (-6 dB bandwidth).

OFF: selects the Gaussian filter (-3 dB bandwidth).

This command is valid only when the EMC measurement standard is "None".

Return Format

The query returns 0 or 1.

Example

The following command selects the filter type within Range 2 to EMI filter.

:SENSe:FSCan:SCAN2:BANDwidth:EMIFilter:STATe ON

or :SENSe:FSCan:SCAN2:BANDwidth:EMIFilter:STATe 1

:SENSe:FSCan:SCAN2:BWIDth:EMIFilter:STATe ON or :SENSe:FSCan:SCAN2:BWIDth:EMIFilter:STATe 1

The following query returns 1.

:SENSe:FSCan:SCAN2:BANDwidth:EMIFilter:STATe?

:SENSe:FSCan:SCAN2:BWIDth:EMIFilter:STATe?

[[:SENSe]:FSCan:SCAN<n>:BANDwidth[:RESolution]

Syntax

[[:SENSe]:FSCan:SCAN<n>:BANDwidth[:RESolution] <freq>

[[:SENSe]:FSCan:SCAN<n>:BANDwidth[:RESolution]?

Description

Sets the resolution bandwidth (RBW) for the specified range.

Queries the RBW for the specified range.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8 9 10	3 4 5
<freq>	Discrete	100 Hz to 10 MHz (at 1-3-10 step)	120 kHz

Remarks

When the EMC measurement standard is "None" and "Gauss" filter is selected, the RBW range is as above.

When "EMI" filter is selected, resolution bandwidth can only be 200 Hz, 9 kHz, 120 kHz, or 1 MHz.

Return Format

The query returns the resolution bandwidth for the specified range in scientific notation. Its unit is Hz.

Example

The following command sets RBW for Range 1 to 1000 Hz.

```
:SENSe:FSCan:SCAN1:BANDwidth:RESolution 1000
```

The following query returns 1.000000000e+03.

```
:SENSe:FSCan:SCAN1:BANDwidth:RESolution?
```

[:SENSe] :FSCan:SCAN<n>:BANDwidth[:RESolution] :AUTO**Syntax**

```
[ :SENSe ] :FSCan:SCAN<n>:BANDwidth[ :RESolution ] :AUTO ON|OFF|1|0
```

```
[ :SENSe ] :FSCan:SCAN<n>:BANDwidth[ :RESolution ] :AUTO?
```

Description

Enables or disables the auto setting mode of RBW for the specified range.

Queries the status of the auto setting mode of RBW for the specified range.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8 9 10	3 4 5
--	Bool	OFF ON 0 1	ON 1

Remarks

In auto mode, the resolution bandwidth changes with the span.

Return Format

The query returns 0 or 1.

Example

The following command enables the auto setting mode of RBW for Range 1.

```
:SENSe:FSCan:SCAN1:BANDwidth:RESolution:AUTO ON
```

```
or :SENSe:FSCan:SCAN1:BANDwidth:RESolution:AUTO 1
```

The following query returns 1.

```
:SENSe:FSCan:SCAN1:BANDwidth:RESolution:AUTO?
```

[[:SENSe]:FSCan:SCAN<n>:INPut:ATTenuation

Syntax

```
[[:SENSe]:FSCan:SCAN<n>:INPut:ATTenuation <rel_ampl>
[:SENSe]:FSCan:SCAN<n>:INPut:ATTenuation?
```

Description

Sets the attenuation value for the specified range.
Queries the attenuation value for the specified range.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8 9 10	3 4 5
<rel_ampl>	Integer	0 dB to 50 dB	10 dB

Return Format

The query returns the attenuation in integer. The unit is dB.

Example

The following command sets the attenuation for Range 1 to 20 dB.

```
:SENSe:FSCan:SCAN1:INPut:ATTenuation 20
```

The following query returns 20.

```
:SENSe:FSCan:SCAN1:INPut:ATTenuation?
```

[[:SENSe]:FSCan:SCAN<n>:INPut:ATTenuation:AUTO

Syntax

```
[[:SENSe]:FSCan:SCAN<n>:INPut:ATTenuation:AUTO ON|OFF|1|0
[:SENSe]:FSCan:SCAN<n>:INPut:ATTenuation:AUTO
```

Description

Enables or disables the auto attenuation mode for the specified range.
Queries the status of the auto attenuation mode for the specified range.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8 9 10	3 4 5
--	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command disables the auto attenuation mode for Range 1.

```
:SENSe:FSCan:SCAN1:INPut:ATTenuation:AUTO 0 or :SENSe:FSCan:SCAN1:INPut:ATTenuation:AUTO OFF
```

The following query returns 0.

```
:SENSe:FSCan:SCAN1:INPut:ATTenuation:AUTO?
```


[[:SENSe]:FSCan:SCAN<n>:POINT

Syntax

```
[[:SENSe]:FSCan:SCAN<n>:POINT <integer>
```

```
[[:SENSe]:FSCan:SCAN<n>:POINT?
```

Description

Sets the number of scan points for the specified range.

Queries the number of scan points for the specified range.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8 9 10	3 4 5
<integer>	Integer	101 to 10,001	Refer to "Remarks"

Remarks

The default value of the scan points is determined by the following parameters for the specified range:
 scan points = (stop frequency – start frequency) / (RBW/2)

Return Format

The query returns the number of scan points in integer.

Example

The following command sets the number of scan points for Range 1 to 650.

```
:SENSe:FSCan:SCAN1:POINT 650
```

The following query returns 650.

```
:SENSe:FSCan:SCAN1:POINT?
```

[[:SENSe]:FSCan:SCAN<n>:POWer:GAIN[:STATe]

Syntax

```
[[:SENSe]:FSCan:SCAN<n>:POWer:GAIN[:STATe] ON|OFF|1|0
```

```
[[:SENSe]:FSCan:SCAN<n>:POWer:GAIN[:STATe]?
```

Description

Enable or disable the preamplifier for the specified range.

Queries the status of the preamplifier for the specified range.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8 9 10	3 4 5
--	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command enables the preamplifier for Range 1.

```
:SENSe:FSCan:SCAN1:POWer:GAIN:STATe 1 or :SENSe:FSCan:SCAN1:POWer:GAIN:STATe ON
```

The following query returns 1.

```
:SENSe:FSCan:SCAN1:POWer:GAIN:STATe?
```

[[:SENSe]:FSCan:SCAN<n>:START

Syntax

```
[[:SENSe]:FSCan:SCAN<n>:START <freq>
[:SENSe]:FSCan:SCAN<n>:START?
```

Description

Sets the start frequency for the specified range.
Queries the start frequency for the specified range.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8 9 10	3 4 5
<freq>	Consecutive Real Number	0 Hz to 3 GHz	30 MHz

Return Format

The query returns the start frequency for the specified range in scientific notation. The unit is Hz.

Example

The following command sets the start frequency for Range 1 to 10 MHz.

```
:SENSe:FSCan:SCAN1:START 10000000
```

The following query returns 1.000000000e+07.

```
:SENSe:FSCan:SCAN1:START?
```

[[:SENSe]:FSCan:SCAN<n>:STATE

Syntax

```
[[:SENSe]:FSCan:SCAN<n>:STATE ON|OFF|1|0
[:SENSe]:FSCan:SCAN<n>:STATE?
```

Description

Enables or disables the sweep function for the specified range.
Queries the sweep status for the specified range.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8 9 10	3 4 5
--	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command enables sweep for Range 1.

```
:SENSe:FSCan:SCAN1:STATE ON or :SENSe:FSCan:SCAN1:STATE 1
```

The following query returns 1.

```
:SENSe:FSCan:SCAN1:STATE?
```

[[:SENSe]:FSCan:SCAN<n>:STOP

Syntax

```
[[:SENSe]:FSCan:SCAN<n>:STOP <freq>
[:SENSe]:FSCan:SCAN<n>:STOP?
```

Description

Sets the stop frequency for the specified range.
Queries the stop frequency for the specified range.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8 9 10	3 4 5
<freq>	Consecutive Real Number	0 Hz to 3 GHz	1 GHz

Return Format

The query returns the stop frequency for the specified range in scientific notation. The unit is Hz.

Example

The following command sets the stop frequency for Range 1 to 100 MHz.
:SENSe:FSCan:SCAN1:STOP 100000000

The following query returns 1.000000000e+08.
:SENSe:FSCan:SCAN1:STOP?

[[:SENSe]:FSCan:SCAN<n>:TIME

Syntax

```
[[:SENSe]:FSCan:SCAN<n>:TIME <time>
[:SENSe]:FSCan:SCAN<n>:TIME?
```

Description

Sets the scan time for the specified sweep range.
Queries the scan time for the specified sweep range.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8 9 10	3 4 5
<time>	Consecutive Real Number	1 ms to 4000 s	--

Return Format

The query returns the scan time in scientific notation. The unit is s.

Example

The following command sets the scan time for sweep range 1 to 0.1 s.
:SENSe:FSCan:SCAN1:TIME 0.1

The following query returns 1.000000000e-01.
:SENSe:FSCan:SCAN1:TIME?

[[:SENSe]:FSCan:SCAN<n>:TIME:AUTO

Syntax

```
[[:SENSe]:FSCan:SCAN<n>:TIME:AUTO ON|OFF|1|0
[:SENSe]:FSCan:SCAN<n>:TIME:AUTO?
```

Description

Enables or disables the auto scan time for the specified sweep range.
Queries the status of the auto scan time for the specified sweep range.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8 9 10	3 4 5
--	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command enables the auto scan time for sweep range 1.
:SENSe:FSCan:SCAN1:TIME:AUTO 1 or :SENSe:FSCan:SCAN1:TIME:AUTO ON

The following query returns 1.
:SENSe:FSCan:SCAN1:TIME:AUTO?

[[:SENSe]:FSCan:SEARch:MODE

Syntax

```
[[:SENSe]:FSCan:SEARch:MODE PONLy|PLIMits|SLIMits
[:SENSe]:FSCan:SEARch:MODE?
```

Description

Sets the signal search criteria in the signal table.
Queries the signal search criteria in the signal table.

Parameter

Name	Type	Range	Default
--	Keyword	PONLy PLIMits SLIMits	PONLy

Remarks

PONLy: indicates the peak criteria only. Perform the search and find the peak that meets the peak criteria.
PLIMits: indicates the peak criteria and limits. Perform the search and find the peak that meets the peak criteria and limits.
SLIMits: indicates the subranges and limits. Perform the search and find the peak that meets the peak criteria and limits within each subrange.

Return Format

The query returns PONL, PLIM, or SLIM.

Example

The following command sets the signal search criteria in the signal table to PONLy.
:SENSe:FSCan:SEARch:MODE PONLy

The following query returns PONL.
:SENSe:FSCan:SEARch:MODE?

[[:SENSe]:FSCan:SEARch:PEAK:COUNT

Syntax

```
[[:SENSe]:FSCan:SEARch:PEAK:COUNT <integer>
[:SENSe]:FSCan:SEARch:PEAK:COUNT?
```

Description

Sets the number of peaks that are required during signal search.
Queries the number of peaks that are required during signal search.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 2000	25

Remarks

This command is only valid when the peak count is enabled.

Return Format

The query returns the peak count in integer.

Example

The following command sets the number of peaks that are required during signal search to 3.
:SENSe:FSCan:SEARch:PEAK:COUNT 3

The following query returns 3.
:SENSe:FSCan:SEARch:PEAK:COUNT?

[[:SENSe]:FSCan:SEARch:PEAK:COUNT:STATe

Syntax

```
[[:SENSe]:FSCan:SEARch:PEAK:COUNT:STATe OFF|ON|0|1
[:SENSe]:FSCan:SEARch:PEAK:COUNT:STATe?
```

Description

Enables or disables the peak count setting.
Queries the status of the peak count setting.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command enables the peak count setting.
:SENSe:FSCan:SEARch:PEAK:COUNT:STATe ON or :SENSe:FSCan:SEARch:PEAK:COUNT:STATe 1

The following query returns 1.
:SENSe:FSCan:SEARch:PEAK:COUNT:STATe?

[[:SENSe]:FSCan:SEARch:SUBRange:COUNT

Syntax

[[:SENSe]:FSCan:SEARch:SUBRange:COUNT <integer>
[[:SENSe]:FSCan:SEARch:SUBRange:COUNT?

Description

Sets the number of subranges in the signal search.
Queries the number of subranges in the signal search.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 50	25

Return Format

The query returns the number of subranges in integer.

Example

The following command sets the number of subranges in the signal search to 3.

```
:SENSe:FSCan:SEARch:SUBRange:COUNT 3
```

The following query returns 3.

```
:SENSe:FSCan:SEARch:SUBRange:COUNT?
```

[[:SENSe]:FSCan:SEQuence

Syntax

[[:SENSe]:FSCan:SEQuence SCAN|SEARch|SSAMeasure|SASearch|SAMeasure|REMeasure
[[:SENSe]:FSCan:SEQuence?

Description

Sets the type of the scan sequence.
Queries the type of the scan sequence.

Parameter

Name	Type	Range	Default
--	Keyword	SCAN SEARch SSAMeasure SASearch SAMeasure REMeasure	SCAN

Remarks

SCAN: indicates the scan only. Perform the pre-scan only.

SEARch: indicates the search only. Perform the peak search only.

SSAMeasure: indicates all the operations. Perform the pre-scan, peak search, and final measurement.

SASearch: indicates scan and search. Perform the pre-scan and peak search.

SAMeasure: indicates the search and measurement. Perform the peak search and final measurement.

REMeasure: indicates the final measurement.

Return Format

The query returns SCAN, SEAR, SSAM, SAS, SAM, or REM.

Example

The following command sets the type of the scan sequence to SCAN.

```
:SENSe:FSCan:SEQuence SCAN
```

The following query returns SCAN.

```
:SENSe:FSCan:SEQuence?
```

[[:SENSe]:FSCan:SEQuence:REMeasure

Syntax

[[:SENSe]:FSCan:SEQuence:REMeasure CURRent|MARKed|ALL
[:SENSe]:FSCan:SEQuence:REMeasure?

Description

Sets the type of the final measurement.

Queries the type of the final measurement.

Parameter

Name	Type	Range	Default
--	Keyword	CURRent MARKed ALL	CURRent

Remarks

CURRent: indicates the selected signal.

MARKed: indicates the marked signal.

ALL: indicates all the signals.

Return Format

The query returns CURR, MARK, or ALL.

Example

The following command sets the type of the final measurement to CURRent.

:SENSe:FSCan:SEQuence:REMeasure CURRent

The following query returns CURR.

:SENSe:FSCan:SEQuence:REMeasure?

[[:SENSe]:FSCan:SLIST:COUPle:METer

Syntax

[[:SENSe]:FSCan:SLIST:COUPle:METer OFF|ON|0|1
[:SENSe]:FSCan:SLIST:COUPle:METer?

Description

Enables or disables the coupling function between the meter and the signal table.

Queries the status of the coupling function between the meter and the signal table.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command enables the coupling function between the meter and the signal table.

:SENSe:FSCan:SLIST:COUPle:METer ON or :SENSe:FSCan:SLIST:COUPle:METer 1

The following query returns 1.

:SENSe:FSCan:SLIST:COUPle:METer?

[[:SENSe]:FSCan:TRACe:TYPE

Syntax

[[:SENSe]:FSCan:TRACe:TYPE WRITe|AVERAge|MAXHold|MINHold
[:SENSe]:FSCan:TRACe:TYPE?

Description

Sets the type of the trace.

Queries the type of the trace.

Parameter

Name	Type	Range	Default
--	Keyword	WRITe AVERAge MAXHold MINHold	WRITe

Remarks

WRITe: indicates clear/write.

AVERAge: indicates average.

MAXHold: indicates the maximum hold.

MINHold: indicates the minimum hold.

Return Format

The query returns WRIT, AVER, MAXH, or MINH.

Example

The following command sets the type of the current trace to MAXHold.

:SENSe:FSCan:TRACe:TYPE MAXHold

The following query returns MAXH.

:SENSe:FSCan:TRACe:TYPE?

[[:SENSe]:METer:DETEctor:DWELI

Syntax

[[:SENSe]:METer:DETEctor:DWELI <time>
[:SENSe]:METer:DETEctor:DWELI?

Description

Sets the dwell time of the meter detector.

Queries the dwell time of meter detector.

Parameter

Name	Type	Range	Default
<time>	Consecutive Real Number	10 ms to 100 s	10 ms

Return Format

The query returns the dwell time in scientific notation. The unit is s.

Example

The following command sets the dwell time of the meter detector to 0.1 s.

:SENSe:METer:DETEctor:DWELI 0.1

The following query returns 1.000000000e-01.

:SENSe:METer:DETEctor:DWELI?

[[:SENSe]:METer:PHOLd:ADJustable

Syntax

[[:SENSe]:METer:PHOLd:ADJustable <time>
[[:SENSe]:METer:PHOLd:ADJustable?

Description

Sets the peak hold time of the meter.
Queries the peak hold time of the meter.

Parameter

Name	Type	Range	Default
<time>	Consecutive Real Number	500 ms to 100 s	2 s

Return Format

The query returns the peak hold time in scientific notation.

Example

The following command sets the peak hold time of the meter to 0.8 s.

:SENSe:METer:PHOLd:ADJustable 0.8

The following query returns 8.000000000e-01.

:SENSe:METer:PHOLd:ADJustable?

[[:SENSe]:METer:PHOLd:RESet

Syntax

[[:SENSe]:METer:PHOLd:RESet

Description

Resets the peak hold lines of all the currently enabled meters to the current signal value.

[[:SENSe]:METer:PHOLd:TYPE

Syntax

[[:SENSe]:METer:PHOLd:TYPE INFinite|ADJustable
[[:SENSe]:METer:PHOLd:TYPE?

Description

Sets the max hold time mode of the meter.
Queries the max hold time mode of the meter.

Parameter

Name	Type	Range	Default
--	Keyword	INFinite ADJustable	INFinite

Remarks

INFinite: indicates the infinite mode. The peak hold line of the selected meter will not be reset.

ADJustable: indicates the adjustable mode. The peak hold line of the selected meter will be reset to the current signal value after the set peak hold time.

Return Format

The query returns INF or ADJ.

Example

The following command sets the max hold time of the meter to INFinite.

```
:SENSe:METer:PHOLd:TYPE INFinite
```

The following query returns INF.

```
:SENSe:METer:PHOLd:TYPE?
```

[:SENSe]:METer<n>:DETector**Syntax**

```
[ :SENSe ]:METer<n>:DETector POSitive|QPEak|CAVerage|RAVerage|AVERage|NEGative
```

```
[ :SENSe ]:METer<n>:DETector?
```

Description

Sets the detector type of the specified meter.

Queries the detector type of the specified meter.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3	1
--	Keyword	POSitive QPEak CAVerage RAVerage AVERage NEGative	POSitive

Remarks

POSitive: indicates the positive peak.

QPEak: indicates the quasi-peak.

CAVerage: indicates the CISPR average.

RAVerage: indicates the RMS average.

AVERage: indicates the voltage average.

NEGative: indicates the negative peak.

Return Format

The query returns POS, QPE, CAV, RAV, AVER, or NEG.

Example

The following command sets the detector type of Meter 1 to POSitive.

```
:SENSe:METer1:DETector POSitive
```

The following query returns POS.

```
:SENSe:METer1:DETector?
```

[:SENSe]:POWer[:RF]:ATTenuation**Syntax**

```
[ :SENSe ]:POWer[:RF]:ATTenuation <real>
```

```
[ :SENSe ]:POWer[:RF]:ATTenuation?
```

Description

Sets the attenuation of the meter attenuator.

Queries the attenuation of the meter attenuator.

Parameter

Name	Type	Range	Default
<real>	Integer	0 dB to 50 dB	10 dB

Return Format

The query returns the attenuation in integer. The unit is dB.

Example

The following command set the attenuation to 20 dB.

```
:SENSe:POWer:RF:ATTenuation 20
```

The following query returns 20.

```
:SENSe:POWer:RF:ATTenuation?
```

[[:SENSe]:POWer[:RF]:GAIN[:STATe]**Syntax**

```
[[:SENSe]:POWer[:RF]:GAIN[:STATe] OFF|ON|0|1
```

```
[[:SENSe]:POWer[:RF]:GAIN[:STATe]?]
```

Description

Enable or disable the meter preamplifier.

Queries the status of the meter preamplifier.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command enables the meter preamplifier.

```
:SENSe:POWer:RF:GAIN:STATe ON or :SENSe:POWer:RF:GAIN:STATe 1
```

The following query returns 1.

```
:SENSe:POWer:RF:GAIN:STATe?
```

:STATus Commands

For the details about the :STATus commands, refer to 2-182.

:SYSTem Commands

For the details about the :SYSTem commands, refer to 2-186.

:TRACe Commands

Command List:

- ◆ :TRACe[:DATA]
- ◆ :TRACe<n>:DISPlay[:STATe]
- ◆ :TRACe<n>:UPDate:STATe

:TRACe[:DATA]

Syntax

```
:TRACE[:DATA]? TRACE1|TRACE2|TRACE3
```

Description

Queries the log data of the specified trace.

Parameter

Name	Type	Range	Default
--	Keyword	TRACE1 TRACE2 TRACE3	--

Remarks

If the filter for the specified range in the scan table is EMI filter and RBW is 1 MHz, and the trace detector type is quasi peak, the query of the corresponding trace data returns -1.700000000e+02.

If the filter the filter for the specified range in the scan table is Gauss filter, and the trace detector type is quasi peak, CISPR average, or RMS average, the query of the corresponding trace data returns - 1.700000000e+02.

Return Format

The query returns the data of the specified trace. The format of the returned data is determined by the settings of the `:FORMAt[:TRACe][:DATA]` command.

Example^[1]

- [illegible]

Note: The PC software converts the returned binary data to ASCII format. Therefore, if you use the PC software to perform the query command, the returned value is displayed as a messy code.

```
:TRACe:DATA? TRACE2
```

Note^[1]: The two examples in this page take sending 801 points as an example, and the query returns 801 points. Due to the limited space, the subsequent data are omitted. In addition, the returned values of the above examples are obtained when the system stops sweeping the trace.

:TRACe<n>:DISPlay[:STATe]

Syntax

```
:TRACe<n>:DISPlay[:STATe] OFF|ON|0|1
:TRACe<n>:DISPlay[:STATe]?
```

Description

Enables or disables the display of the specified trace.
Queries the setting state for the specified trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3	--
--	Bool	OFF ON 0 1	Refer to "Remarks"

Remarks

By default, Trace 1 is enabled (ON), and Trace 2 through Trace 3 are disabled (OFF).

Return Format

The query returns 1 or 0.

Example

The following command enables the display of Trace 1.
:TRACe1:DISPlay:STATe ON or :TRACe1:DISPlay:STATe 1

The following query returns 1.
:TRACe1:DISPlay:STATe?

:TRACe<n>:UPDate:STATe

Syntax

```
:TRACe<n>:UPDate:STATe OFF|ON|0|1
:TRACe<n>:UPDate:STATe?
```

Description

Enables or disables the update of the specified trace.
Queries the setting state for the update of the specified trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3	--
--	Bool	OFF ON 0 1	Refer to "Remarks"

Remarks

By default, Trace 1 is enabled (ON), and Trace 2 through Trace 3 are disabled (OFF).

Return Format

The query returns 1 or 0.

Example

The following command enables the update of Trace 1.
:TRACe1:UPDate:STATe ON or :TRACe1:UPDate:STATe 1

The following query returns 1.
:TRACe1:UPDate:STATe?

:TRIGger Commands

Command List:

- ◆ [:TRIGger\[:SEquence\]:ATRigger](#)
- ◆ [:TRIGger\[:SEquence\]:ATRigger:STATe](#)
- ◆ [:TRIGger\[:SEquence\]:EXTernal<n>:DELay](#)
- ◆ [:TRIGger\[:SEquence\]:EXTernal<n>:DELay:STATe](#)
- ◆ [:TRIGger\[:SEquence\]:EXTernal<n>:SLOPe](#)
- ◆ [:TRIGger\[:SEquence\]:HOLDoff](#)
- ◆ [:TRIGger\[:SEquence\]:HOLDoff:STATe](#)
- ◆ [:TRIGger\[:SEquence\]:SOURce](#)
- ◆ [:TRIGger2:MODE](#)

:TRIGger[:SEquence]:ATRigger

Syntax

```
:TRIGger[:SEquence]:ATRigger <time>
:TRIGger[:SEquence]:ATRigger?
```

Description

Sets the time that the analyzer will wait for the trigger to be initiated automatically.
Queries the time that the analyzer will wait for the trigger to be initiated automatically.

Parameter

Name	Type	Range	Default
<time>	Consecutive Real Number	1 ms to 100 s	100 ms

Remarks

This command is only valid when the auto triggering function is enabled.

Return Format

The query returns the time value in scientific notation. The unit is s.

Example

The following command sets the time to 10 ms.

```
:TRIGger:SEquence:ATRigger 0.01
```

The following query returns 1.000000000e-02.

```
:TRIGger:SEquence:ATRigger?
```


:TRIGger[:SEQuence]:ATRigger:STATe

Syntax

```
:TRIGger[:SEQuence]:ATRigger:STATe OFF|ON|0|1
:TRIGger[:SEQuence]:ATRigger:STATe?
```

Description

Enables or disables the auto trigger function.

Queries the setting status of auto trigger function.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 1 or 0.

Example

The following command enables the auto trigger function.

```
:TRIGger:SEQuence:ATRigger:STATe ON or :TRIGger:SEQuence:ATRigger:STATe 1
```

The following query returns 1.

```
:TRIGger:SEQuence:ATRigger:STATe?
```

:TRIGger[:SEQuence]:EXTErnal<n>:DELAy

Syntax

```
:TRIGger[:SEQuence]:EXTErnal<n>:DELAy <time>
:TRIGger[:SEQuence]:EXTErnal<n>:DELAy?
```

Description

Sets the delay time for the external trigger.

Queries the delay time for the external trigger.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2	--
<time>	Consecutive Real Number	0 us to 500 ms	1 μ s

Remarks

When the parameter n is set to 1, it indicates External Trigger 1; when set to 2, it indicates External Trigger 2.

This command is only valid when the external trigger delay function is enabled.

Return Format

The query returns the delay time for the external trigger in scientific notation. The unit is s.

Example

The following command sets the delay time for External Trigger 1 to 100 ms.

```
:TRIGger:SEQuence:EXTErnal1:DELAy 0.1
```

The following query returns 1.000000000e-01.

```
:TRIGger:SEQuence:EXTErnal1:DELAy?
```

:TRIGger[:SEQuence]:EXTErnal<n>:DELay:STATe

Syntax

```
:TRIGger[:SEQuence]:EXTErnal<n>:DELay:STATe OFF|ON|0|1
:TRIGger[:SEQuence]:EXTErnal<n>:DELay:STATe?
```

Description

Enables or disables the external trigger delay function.
Queries the setting state of the external trigger delay function.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2	--
--	Bool	OFF ON 0 1	OFF 0

Remarks

When the parameter n is set to 1, it indicates External Trigger 1; when set to 2, it indicates External Trigger 2.

Return Format

The query returns 1 or 0.

Example

The following command enables the delay function of External Trigger 1.

```
:TRIGger:SEQuence:EXTErnal1:DELay:STATe ON or :TRIGger:SEQuence:EXTErnal1:DELay:STATe 1
```

The following query returns 1.

```
:TRIGger:SEQuence:EXTErnal1:DELay:STATe?
```

:TRIGger[:SEQuence]:EXTErnal<n>:SLOPe

Syntax

```
:TRIGger:SEQuence:EXTErnal<n>:SLOPe POSitive|NEGative
:TRIGger:SEQuence:EXTErnal<n>:SLOPe?
```

Description

Sets the trigger edge for the external trigger.
Queries the trigger edge for the external trigger.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2	--
--	Keyword	POSitive NEGative	POSitive

Remarks

When the parameter n is set to 1, it indicates External Trigger 1; when set to 2, it indicates External Trigger 2.

POSitive: indicates the rising edge.

NEGative: indicates the falling edge.

Return Format

The query returns POS or NEG.

Example

The following command sets the trigger edge of External Trigger 1 to be Positive.

```
:TRIGger:SEquence:EXternal1:SLOPe POSitive
```

The following query returns POS.

```
:TRIGger:SEquence:EXternal1:SLOPe?
```

:TRIGger[:SEquence]:HOLDoff**Syntax**

```
:TRIGger[:SEquence]:HOLDoff <time>
```

```
:TRIGger[:SEquence]:HOLDoff?
```

Description

Sets the trigger holdoff time.

Queries the trigger holdoff time.

Parameter

Name	Type	Range	Default
<time>	Consecutive Real Number	100 us to 500 ms	100 ms

Remarks

This command is only valid when the trigger holdoff function is enabled.

Return Format

The query returns the trigger holdoff time in scientific notation. The unit is s.

Example

The following command sets the sync holdoff time to 100 ms.

```
:TRIGger:SEquence:HOLDoff 0.1
```

The following query returns 1.000000000e-01.

```
:TRIGger:SEquence:HOLDoff?
```

:TRIGger[:SEquence]:HOLDoff:STATe**Syntax**

```
:TRIGger[:SEquence]:HOLDoff:STATe OFF|ON|0|1
```

```
:TRIGger[:SEquence]:HOLDoff:STATe?
```

Description

Turns on or off the trigger holdoff function.

Queries the status of the trigger holdoff function.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 1 or 0.

Example

The following command enables the trigger holdoff function.

:TRIGger:SEQuence:HOLDoff:STATe ON or :TRIGger:SEQuence:HOLDoff:STATe 1

The following query returns 1.

:TRIGger:SEQuence:HOLDoff:STATe?

:TRIGger[:SEQuence]:SOURce**Syntax**

:TRIGger[:SEQuence]:SOURce EXTernal1|EXTernal2|IMMediate

:TRIGger[:SEQuence]:SOURce?

Description

Sets the trigger source.

Queries the trigger source.

Parameter

Name	Type	Range	Default
--	Keyword	EXTernal1 EXTernal2 IMMediate	IMMediate

Remarks

EXTernal1: indicates External Trigger 1.

EXTernal2: indicates External Trigger 2.

IMMediate: indicates the free-run trigger.

Return Format

The query returns EXT1, EXT2, or IMM.

Example

The following command sets the trigger source to free-run trigger.

:TRIGger:SEQuence:SOURce IMMediate

The following query returns IMM.

:TRIGger:SEQuence:SOURce?

:TRIGger2:MODE**Syntax**

:TRIGger2:MODE IN|OUT|0|1

:TRIGger2:MODE?

Description

Sets the interface type of External Trigger 2.

Queries the interface type of External Trigger 2.

Parameter

Name	Type	Range	Default
--	Keyword	IN OUT 0 1	IN 0

Remarks

IN|0: indicates the input interface.

OUT|1: indicates the output interface.

Return Format

The query returns 0 or 1.

Example

The following command sets External Trigger 2 to be the input interface.

```
:TRIGger2:MODE IN
```

The following query returns 0.

```
:TRIGger2:MODE?
```

:UNIT Command

Command List:

◆ :[UNIT:POWer](#)

:UNIT:POWer

Syntax

:UNIT:POWer DBM|DBMV|DBUV|V|W
:UNIT:POWer?

Description

Sets the unit of the Y axis.
Queries the unit of the Y axis.

Parameter

Name	Type	Range	Default
--	Keyword	DBM DBMV DBUV V W	Refer to " Remarks "

Remarks

The default log unit is dBm.
The default linear unit is V.

Return Format

The query returns DBM, DBMV, DBUV, V, or W.

Example

The following command sets the amplitude unit to Watts.
:UNIT:POWer W

The following query returns W.
:UNIT:POWer?

Chapter 4 Command System for VSA Mode

This chapter introduces the commands of the RSA5000E series spectrum analyzer in VSA mode.

Contents in this chapter:

- ◆ [:CALCulate Commands](#)
- ◆ [:CALibration Commands](#)
- ◆ [:CONFigure Commands](#)
- ◆ [:DISPlay Commands](#)
- ◆ [:FETCh Commands](#)
- ◆ [:FORMat Commands](#)
- ◆ [IEEE 488.2 Common Commands](#)
- ◆ [:INITiate Commands](#)
- ◆ [:INSTrument Commands](#)
- ◆ [:MMEMory Commands](#)
- ◆ [\[:SENSe\] Commands](#)
- ◆ [:STATus Commands](#)
- ◆ [:SYSTem Commands](#)
- ◆ [:TRACe Command](#)
- ◆ [:TRIGger Commands](#)

Remarks:

1. For the command set, unless otherwise specified, the query command returns "N/A" (without quotations in its return format) if no specified option is installed. If the queried function is disabled or improper type match is found, the query command will return "Error" (without quotations in its return format).
2. This manual takes RSA3030E as an example to illustrate the range of the parameters in each command.

:CALCulate Commands

Command List:

- ◆ [:CALCulate:DDEMod:MARKer:AOff](#)
- ◆ [:CALCulate:DDEMod:MARKer:COUPle\[:STATe\]](#)
- ◆ [:CALCulate:DDEMod:MARKer:TABLE\[:STATe\]](#)
- ◆ [:CALCulate:DDEMod:MARKer<n>:CPSearch\[:STATe\]](#)
- ◆ [:CALCulate:DDEMod:MARKer<n>:FUNCTION](#)
- ◆ [:CALCulate:DDEMod:MARKer<n>:FUNCTION:BAND:LEFT](#)
- ◆ [:CALCulate:DDEMod:MARKer<n>:FUNCTION:BAND:RIGHT](#)
- ◆ [:CALCulate:DDEMod:MARKer<n>:FUNCTION:BAND:SPAN](#)
- ◆ [:CALCulate:DDEMod:MARKer<n>:MAXimum](#)
- ◆ [:CALCulate:DDEMod:MARKer<n>:MAXimum:LEFT](#)
- ◆ [:CALCulate:DDEMod:MARKer<n>:MAXimum:NEXT](#)
- ◆ [:CALCulate:DDEMod:MARKer<n>:MAXimum:PREVIOUS](#)
- ◆ [:CALCulate:DDEMod:MARKer<n>:MAXimum:RIGHT](#)
- ◆ [:CALCulate:DDEMod:MARKer<n>:MINimum](#)
- ◆ [:CALCulate:DDEMod:MARKer<n>:MODE](#)
- ◆ [:CALCulate:DDEMod:MARKer<n>:REFERENCE](#)
- ◆ [:CALCulate:DDEMod:MARKer<n>:TRACE](#)
- ◆ [:CALCulate:DDEMod:MARKer<n>:X](#)
- ◆ [:CALCulate:DDEMod:MARKer<n>:Y:IMAGinary](#)
- ◆ [:CALCulate:DDEMod:MARKer<n>:Y\[:REAL\]](#)
- ◆ [:CALCulate:MARKer<n>\[:SET\]:CENTer](#)
- ◆ [:CALCulate:MARKer<n>\[:SET\]:DELTA:CENTer](#)
- ◆ [:CALCulate:MARKer<n>\[:SET\]:RLEVEL](#)
- ◆ [:CALCulate:MARKer<n>\[:SET\]:START](#)
- ◆ [:CALCulate:MARKer<n>\[:SET\]:STEP](#)
- ◆ [:CALCulate:MARKer<n>\[:SET\]:STOP](#)

:CALCulate:DDEMod:MARKer:AOff**Syntax**

:CALCulate:DDEMod:MARKer:AOff

Description

Turns off all the enabled markers.

:CALCulate:DDEMod:MARKer:COUPle[:STATe]**Syntax**

:CALCulate:DDEMod:MARKer:COUPle[:STATe] OFF|ON|0|1

:CALCulate:DDEMod:MARKer:COUPle[:STATe]?

Description

Enables or disables the couple marker function.

Queries the state of the couple marker function.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	OFF 0

Remarks

When you enable the couple marker function, moving any marker will make other markers (that are not fixed or off) move along with it.

Return Format

The query returns 0 or 1.

Example

The following command disables the couple marker function.

:CALCulate:DDEMod:MARKer:COUPle:STATe OFF or :CALCulate:DDEMod:MARKer:COUPle:STATe 0

The following query returns 0.

:CALCulate:DDEMod:MARKer:COUPle:STATe?

:CALCulate:DDEMod:MARKer:TABLE[:STATe]**Syntax**

:CALCulate:DDEMod:MARKer:TABLE[:STATe] OFF|ON|0|1

:CALCulate:DDEMod:MARKer:TABLE[:STATe]?

Description

Enables or disables the marker table.

Queries the state of the marker table.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command disables the marker table.

```
:CALCulate:DDEMod:MARKer:TABLE:STATe OFF or :CALCulate:DDEMod:MARKer:TABLE:STATe 0
```

The following query returns 0.

```
:CALCulate:DDEMod:MARKer:TABLE:STATe?
```

:CALCulate:DDEMod:MARKer<n>:CPSearch[:STATe]**Syntax**

```
:CALCulate:DDEMod:MARKer<n>:CPSearch[:STATe] OFF|ON|0|1
```

```
:CALCulate:DDEMod:MARKer<n>:CPSearch[:STATe]?
```

Description

Enables or disables continuous peak search function, and marks the peak value with Marker N.
Queries the status of continuous peak search function.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--
--	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command enables the continuous peak search function, and marks the peak value with Marker 1.

```
:CALCulate:DDEMod:MARKer1:CPSearch:STATe ON or :CALCulate:DDEMod:MARKer1:CPSearch:STATe 1
```

The following query returns 1.

```
:CALCulate:DDEMod:MARKer1:CPSearch:STATe?
```

:CALCulate:DDEMod:MARKer<n>:FUNCTION**Syntax**

```
:CALCulate:DDEMod:MARKer<n>:FUNCTION BPOWer|OFF
```

```
:CALCulate:DDEMod:MARKer<n>:FUNCTION?
```

Description

Selects the special measurement type for the specified marker.
Queries the special measurement type of the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--
--	Keyword	BPOWer OFF	OFF

Remarks

BPOWer: indicates the bandwidth power.

OFF: turns off all the measurements.

This command is only valid when you open the marker on the frequency domain data.

Return Format

The query returns BPOW or OFF.

Example

The following command sets the measurement type of Marker 1 to band power.

```
:CALCulate:DDEMod:MARKer1:FUNCTion BPOW
```

The following query returns BPOW.

```
:CALCulate:DDEMod:MARKer1:FUNCTion?
```

:CALCulate:DDEMod:MARKer<n>:FUNCTion:BAND:LEFT**Syntax**

```
:CALCulate:DDEMod:MARKer<n>:FUNCTion:BAND:LEFT <real>
```

```
:CALCulate:DDEMod:MARKer<n>:FUNCTion:BAND:LEFT?
```

Description

Sets the left edge frequency or time of the signal involved in the calculation for the band function.

Queries the left edge frequency or time of the signal involved in the calculation for the band function.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--
<real>	Consecutive Real Number	0 to band right	center frequency-bandwidth/2

Remarks

This command is only valid when you open the marker on the frequency domain data and enable the corresponding bandwidth function.

This command is used to set the left edge time when you select the time-domain data source.

Return Format

The query returns the left edge frequency or time of the signal in scientific notation.

Example

The following command sets the left edge frequency of the signal involved in the calculation for the Marker 1 band function to 2 MHz.

```
:CALCulate:DDEMod:MARKer1:FUNCTion:BAND:LEFT 2000000
```

The following query returns 2.000000000e+06.

```
:CALCulate:DDEMod:MARKer1:FUNCTion:BAND:LEFT?
```

:CALCulate:DDEMod:MARKer<n>:FUNCTion:BAND:RIGHT**Syntax**

```
:CALCulate:DDEMod:MARKer<n>:FUNCTion:BAND:RIGHT <real>
```

```
:CALCulate:DDEMod:MARKer<n>:FUNCTion:BAND:RIGHT?
```

Description

Sets the right edge frequency or time of the signal involved in the calculation for the band function.

Queries the right edge frequency or time of the signal involved in the calculation for the band function.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--
<real>	Consecutive Real Number	band left to $+\infty$	center frequency+bandwidth/2

Remarks

This command is only valid when you open the marker on the frequency domain data and enable the corresponding bandwidth function.

This command is used to set the right edge time when you select the time-domain data source.

Return Format

The query returns the right edge frequency or time of the signal in scientific notation.

Example

The following command sets the right edge frequency of the signal involved in the calculation for the Marker 1 band function to 4 GHz.

```
:CALCulate:DDEMod:MARKer1:FUNCTION:BAND:RIGHT 4000000000
```

The following query returns 4.000000000e+09.

```
:CALCulate:DDEMod:MARKer1:FUNCTION:BAND:RIGHT?
```

:CALCulate:DDEMod:MARKer<n>:FUNCTION:BAND:SPAN**Syntax**

```
:CALCulate:DDEMod:MARKer<n>:FUNCTION:BAND:SPAN <freq>
```

```
:CALCulate:DDEMod:MARKer<n>:FUNCTION:BAND:SPAN?
```

Description

Sets the bandwidth or the time span of the signal involved in the calculation for the band function.

Queries the bandwidth or the time span of the signal involved in the calculation for the band function.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--
<freq>	Consecutive Real Number	0 to $+\infty$	span/20

Remarks

This command is only valid when you open the marker on the frequency domain data and enable the corresponding bandwidth function.

This command is used to set the time span when you select the time-domain data source.

Return Format

The query returns the bandwidth of the signal involved in the calculation for the band function in scientific notation.

Example

The following command sets the bandwidth of the signal involved in the calculation for the Marker 1 band function to 500 MHz.

```
:CALCulate:DDEMod:MARKer1:FUNCTION:BAND:SPAN 500000000
```

The following query returns 5.000000000e+08.

```
:CALCulate:DDEMod:MARKer1:FUNCTION:BAND:SPAN?
```

:CALCulate:DDEMod:MARKer<n>:MAXimum

Syntax

:CALCulate:DDEMod:MARKer<n>:MAXimum

Description

Performs one peak search, and marks with the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--

Remarks

When no peak is found, a prompt message "No peak found" is displayed on the screen.

Example

The following command performs one peak search, and marks with Marker 2.

```
:CALCulate:DDEMod:MARKer2:MAXimum
```

:CALCulate:DDEMod:MARKer<n>:MAXimum:LEFT

Syntax

:CALCulate:DDEMod:MARKer<n>:MAXimum:LEFT

Description

Searches for the nearest peak which is located at the left side of the current peak and marks it with the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--

Remarks

When no peak is found, a prompt message "No peak found" is displayed on the screen.

Example

The following command performs one left peak search, and marks with Marker 2.

```
:CALCulate:DDEMod:MARKer2:MAXimum:LEFT
```

:CALCulate:DDEMod:MARKer<n>:MAXimum:NEXT

Syntax

:CALCulate:DDEMod:MARKer<n>:MAXimum:NEXT

Description

Searches for the peak whose amplitude on the trace is next lower than that of the current peak and marks it with the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--

Remarks

When no peak is found, a prompt message "No peak found" is displayed on the screen.

Example

The following command performs one next peak search, and marks with Marker 2.
:CALCulate:DDEMod:MARKer2:MAXimum:NEXT

:CALCulate:DDEMod:MARKer<n>:MAXimum:PREVious**Syntax**

:CALCulate:DDEMod:MARKer<n>:MAXimum:PREVious

Description

Searches for the peak whose amplitude on the trace is next higher than that of the current peak and marks it with the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--

Remarks

When no peak is found, a prompt message "No peak found" is displayed on the screen.

Example

The following command performs one next higher peak search, and marks with Marker 2.
:CALCulate:DDEMod:MARKer2:MAXimum:PREVious

:CALCulate:DDEMod:MARKer<n>:MAXimum:RIGHT**Syntax**

:CALCulate:DDEMod:MARKer<n>:MAXimum:RIGHT

Description

Searches for the nearest peak which is located at the right side of the current peak and marks it with the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--

Remarks

When no peak is found, a prompt message "No peak found" is displayed on the screen.

Example

The following command performs one right peak search, and marks with Marker 2.
:CALCulate:DDEMod:MARKer2:MAXimum:RIGHT

:CALCulate:DDEMod:MARKer<n>:MINimum

Syntax

:CALCulate:DDEMod:MARKer<n>:MINimum

Description

Searches for the peak with the minimum amplitude on the trace and marks it with the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--

Remarks

When no peak is found, a prompt message "No peak found" is displayed on the screen.

Example

The following command performs one minimum search, and marks it with Marker 2.

```
:CALCulate:DDEMod:MARKer2:MINimum
```

:CALCulate:DDEMod:MARKer<n>:MODE

Syntax

```
:CALCulate:DDEMod:MARKer<n>:MODE POSition|DELTA|FIXed|OFF
```

```
:CALCulate:DDEMod:MARKer<n>:MODE?
```

Description

Sets the type of the specified marker.

Queries the type of the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--
--	Keyword	POSition DELTA FIXed OFF	POSition

Remarks

POSition: indicates the normal marker.

DELTA: indicates difference between two data points.

FIXed: indicates that the marker is fixed.

OFF: turns off the selected marker.

Return Format

The query returns POS, DELT, FIX, or OFF.

Example

The following command sets the type of Marker 1 to POSition.

```
:CALCulate:DDEMod:MARKer1:MODE POSition
```

The following query returns POS.

```
:CALCulate:DDEMod:MARKer1:MODE?
```

:CALCulate:DDEMod:MARKer<n>:REFerence

Syntax

```
:CALCulate:DDEMod:MARKer<n>:REFerence <integer>
:CALCulate:DDEMod:MARKer<n>:REFerence?
```

Description

Sets the reference marker for the specified marker.
Queries the reference marker for the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--
<integer>	Integer	1 to 8	By default, the reference marker is the marker next to it.

Remarks

Each marker can have another marker to be its reference marker.
If the current marker is a Delta marker, the measurement result of the marker will be determined by the reference marker.
Any marker cannot have itself to be the reference marker.

Example

The following command sets the reference marker for Marker 1 to 2.
:CALCulate:DDEMod:MARKer1:REFerence 2

The following query returns 2.
:CALCulate:DDEMod:MARKer1:REFerence?

:CALCulate:DDEMod:MARKer<n>:TRACe

Syntax

```
:CALCulate:DDEMod:MARKer<n>:TRACe <integer>
:CALCulate:DDEMod:MARKer<n>:TRACe?
```

Description

Sets the marker trace for the specified marker.
Queries the marker trace for the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--
<integer>	Discrete	1 2 3 4	1

Remarks

<integer> indicates the marker trace, and its range is from Trace 1 to Trace 4.

Return Format

The query returns any integer ranging from 1 to 4.

Example

The following command sets the marker trace of Marker 1 to Trace 2.
:CALCulate:DDEMod:MARKer1:TRACe 2

The following query returns 2.

```
:CALCulate:DDEMod:MARKer1:TRACe?
```

:CALCulate:DDEMod:MARKer<n>:X

Syntax

```
:CALCulate:DDEMod:MARKer<n>:X <real>
```

```
:CALCulate:DDEMod:MARKer<n>:X?
```

Description

Sets the X-axis value of the specified marker. Its default unit is Hz.

Queries the X-axis value of the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--
<real>	Consecutive Real Number	Refer to " Remarks "	--

Remarks

<real> can be any value within the available range of the current X axis. When frequency-domain data source is selected, the X value represents the frequency; when time data source is selected, the X value represents the time.

If the marker mode of the specified marker is Position or Fixed, this command sets the X value of the marker.

If the specified marker mode is Delta, this command sets the X value of the delta marker relative to the reference marker.

When "Fixed" is selected for the marker mode and "Constellation" is selected for the trace format, Marker X is used to determine the data points.

Return Format

The query returns the X-axis value of the marker in scientific notation.

Example

The following command sets the X-axis value of Marker 1 to 150 MHz.

```
:CALCulate:DDEMod:MARKer1:X 150000000
```

The following query returns 1.500000000e+08.

```
:CALCulate:DDEMod:MARKer1:X?
```

:CALCulate:DDEMod:MARKer<n>:Y:IMAGinary

Syntax

```
:CALCulate:DDEMod:MARKer<n>:Y:IMAGinary <real>
```

```
:CALCulate:DDEMod:MARKer<n>:Y:IMAGinary?
```

Description

Sets the selected marker's quadrature component (imaginary) of the Y value.

Queries the selected marker's quadrature component (imaginary) of the Y value.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--
<real>	Consecutive Real Number	--	--

Remarks

Only when "Fixed" is selected for the marker mode and "I-Q" or "Constellation" is selected for the trace format, the command is valid.

Return Format

The query returns the marker's quadrature component (imaginary) of the Y value in scientific notation.

Example

The following command sets the quadrature component Y value of Marker 1 to 0.435.

```
:CALCulate:DDEMod:MARKer1:Y:IMAGinary 0.435
```

The following query returns 4.350000000e-01.

```
:CALCulate:DDEMod:MARKer1:Y:IMAGinary?
```

:CALCulate:DDEMod:MARKer<n>:Y[:REAL]**Syntax**

```
:CALCulate:DDEMod:MARKer<n>:Y[:REAL] <real>
```

```
:CALCulate:DDEMod:MARKer<n>:Y[:REAL]?
```

Description

Sets the Y-axis value of the specified marker.

Queries the Y-axis value of the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--
<real>	Consecutive Real Number	--	--

Remarks

This command sets the marker's in-phase component (real part) of the Y value.

Return Format

The query returns the Y-axis value of the marker or the in-phase component of the Y value in scientific notation.

Example

The following command sets the Y-axis value of Marker 1 to 0.325.

```
:CALCulate:DDEMod:MARKer1:Y:REAL 0.325
```

The following query returns 3.250000000e-01.

```
:CALCulate:DDEMod:MARKer1:Y:REAL?
```

:CALCulate:MARKer<n>[:SET]:CENTer

Syntax

:CALCulate:MARKer<n>[:SET]:CENTer

Description

Sets the center frequency of the analyzer to the frequency of the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--

Remarks

If the marker mode of the specified marker is Position or Fixed, the center frequency will be set to the frequency of the marker.

If the specified marker mode is Delta, the center frequency will be set to the frequency of the Delta marker.

Example

The following command sets the center frequency to the frequency of Marker 1 (Position).

```
:CALCulate:MARKer1:SET:CENTer
```

:CALCulate:MARKer<n>[:SET]:DELTA:CENTer

Syntax

:CALCulate:MARKer<n>[:SET]:DELTA:CENTer

Description

Sets the center frequency of the analyzer to half of the frequency difference (absolute frequency) between the two Delta markers.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--

Remarks

It is only valid when the current marker mode is "Delta".

Example

The following command sets the center frequency of the analyzer to half of the frequency difference between the two Delta markers.

```
:CALCulate:MARKer1:SET:DELTA:CENTer
```

:CALCulate:MARKer<n>[:SET]:RLEVEL

Syntax

:CALCulate:MARKer<n>[:SET]:RLEVEL

Description

Sets the reference level of the analyzer to the amplitude of the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--

Remarks

If the marker mode of the specified marker is Position or Fixed, the reference level will be set to the amplitude of the marker.

If the specified marker mode is Delta and the current marker is the reference marker, then the reference level is set to the amplitude of the reference marker; if the current marker is the Delta marker, then the reference level is set to the amplitude of the Delta marker.

Example

The following command sets the reference level of the analyzer to the amplitude of Marker 2 (Position).

```
:CALCulate:MARKer2:SET:RLeVel
```

:CALCulate:MARKer<n>[:SET]:START**Syntax**

```
:CALCulate:MARKer<n>[:SET]:START
```

Description

Sets the start frequency of the analyzer to the frequency of the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--

Remarks

If the marker mode of the specified marker is Position or Fixed, the start frequency will be set to the frequency of the marker.

If the specified marker mode is Delta, the start frequency will be set to the frequency of the Delta marker.

Example

The following command sets the start frequency of the analyzer to the frequency of Marker 3 (Position).

```
:CALCulate:MARKer3:SET:START
```

:CALCulate:MARKer<n>[:SET]:STEP**Syntax**

```
:CALCulate:MARKer<n>[:SET]:STEP
```

Description

Sets the center frequency step of the analyzer to the frequency of the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--

Remarks

If the marker mode of the specified marker is Position or Fixed, the center frequency step will be set to the frequency of the marker.

If the specified marker mode is Delta, the center frequency step will be set to the frequency difference between the Delta marker and the reference marker.

Example

The following command sets the center frequency step of the analyzer to the frequency of Marker 4 (Position).

```
:CALCulate:MARKer4:SET:STEP
```

:CALCulate:MARKer<n>[:SET]:STOP

Syntax

```
:CALCulate:MARKer<n>[:SET]:STOP
```

Description

Sets the stop frequency of the analyzer to the frequency of the specified marker.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6 7 8	--

Remarks

If the marker mode of the specified marker is Position or Fixed, the stop frequency will be set to the frequency of the marker.

If the specified marker mode is Delta, the stop frequency will be set to the frequency of the Delta marker.

Example

The following command sets the stop frequency of the analyzer to the frequency of Marker 2 (Position).

```
:CALCulate:MARKer2:SET:STOP
```

:CALibration Commands

Command List:

- ◆ [:CALibration:\[ALL\]](#)
- ◆ [:CALibration:AUTO](#)

:CALibration:[ALL]

Syntax

:CALibration:[ALL]

Description

Executes self-calibration immediately.

Remarks

If the self-calibration succeeded, the command :CALibration:[ALL]? returns 0; if failed, the command :CALibration:[ALL]? returns 1.

Example

The following command executes the self-calibration immediately.
:CALibration:ALL

:CALibration:AUTO

Syntax

:CALibration:AUTO OFF|ON|0|1
:CALibration:AUTO?

Description

Enables or disables auto calibration.
Queries the setting status of auto calibration.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command enables auto calibration.
:CALibration:AUTO ON or :CALibration:AUTO 1

The following query returns 1.
:CALibration:AUTO?

:CONFIgure Commands

Command List:

- ◆ [:CONFIgure:BERate](#)
- ◆ [:CONFIgure:DDEMod](#)

:CONFIgure:BERate

Syntax

:CONFIgure:BERate

Description

Sets the analyzer to be in the bit error rate measurement state.

:CONFIgure:DDEMod

Syntax

:CONFIgure:DDEMod

Description

Sets the analyzer to be in the digital demodulation measurement state.

:DISPlay Commands

Command List:

- ◆ [:DISPlay:BACKlight](#)
- ◆ [:DISPlay:DDEMod:TRACe<n>:DDEMod:EYE:COUNT](#)
- ◆ [:DISPlay:DDEMod:TRACe<n>:DDEMod:SYMBol:FORMat](#)
- ◆ [:DISPlay:DDEMod:TRACe<n>:FEED](#)
- ◆ [:DISPlay:DDEMod:TRACe<n>:FORMat](#)
- ◆ [:DISPlay:DDEMod:TRACe<n>:X\[:SCALe\]:COUPle](#)
- ◆ [:DISPlay:DDEMod:TRACe<n>:X\[:SCALe\]:RLEVel](#)
- ◆ [:DISPlay:DDEMod:TRACe<n>:X\[:SCALe\]:RPOSition](#)
- ◆ [:DISPlay:DDEMod:TRACe<n>:X\[:SCALe\]:SPAN](#)
- ◆ [:DISPlay:DDEMod:TRACe<n>:Y\[:SCALe\]:AUTO:ONCE](#)
- ◆ [:DISPlay:DDEMod:TRACe<n>:Y\[:SCALe\]:PDIVision](#)
- ◆ [:DISPlay:DDEMod:TRACe<n>:Y\[:SCALe\]:RLEVel](#)
- ◆ [:DISPlay:DDEMod:TRACe<n>:Y:UNIT:PREFerence](#)
- ◆ [:DISPlay:DDEMod:WINDow:FORMat](#)
- ◆ [:DISPlay:ENABle](#)
- ◆ [:DISPlay:GRATicule\[:STATe\]](#)
- ◆ [:DISPlay:HDMI\[:STATe\]](#)

:DISPlay:BACKlight

Syntax

```
:DISPlay:BACKlight <integer>
:DISPlay:BACKlight?
```

Description

Sets the brightness of the backlight of LCD.
Queries the brightness of the backlight of LCD.

Parameter

Name	Type	Range	Default
<integer>	Integer	1 to 100	100

Return Format

The query returns the brightness of the LCD backlight in integer.

Example

The following command sets the brightness of the LCD backlight to 50.
:DISPlay:BACKlight 50

The following query returns 50.
:DISPlay:BACKlight?

:DISPlay:DDEMod:TRACe<n>:DDEMod:EYE:COUNT

Syntax

```
:DISPlay:DDEMod:TRACe<n>:DDEMod:EYE:COUNT <real>
:DISPlay:DDEMod:TRACe<n>:DDEMod:EYE:COUNT?
```

Description

Sets the eye length of the specified trace.
Queries the eye length of the specified trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4	--
<real>	Consecutive Real Number	1 to 40	2

Return Format

The query returns the eye length of the specified trace in scientific notation.

Example

The following command sets the eye length of Trace 1 to 3.
:DISPlay:DDEMod:TRACe1:DDEMod:EYE:COUNT 3

The following query returns 3.
:DISPlay:DDEMod:TRACe1:DDEMod:EYE:COUNT?

:DISPlay:DDEMod:TRACe<n>:DDEMod:SYMBol:FORMat

Syntax

:DISPlay:DDEMod:TRACe<n>:DDEMod:SYMBol:FORMat HEXadecimal|BINary
 :DISPlay:DDEMod:TRACe<n>:DDEMod:SYMBol:FORMat?

Description

Sets the symbol format of the specified trace.
 Queries the symbol format of the specified trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4	--
--	Keyword	HEXadecimal BINary	BINary

Remarks

HEXadecimal: indicates the hexadecimal format.
 BINary: indicates the binary format.

Return Format

The query returns HEX or BIN.

Example

The following command sets the symbol format of Trace 1 to BINary.
 :DISPlay:DDEMod:TRACe1:DDEMod:SYMBol:FORMat BINary

The following query returns BIN.
 :DISPlay:DDEMod:TRACe1:DDEMod:SYMBol:FORMat?

:DISPlay:DDEMod:TRACe<n>:FEED

Syntax

:DISPlay:DDEMod:TRACe<n>:FEED
 CTIME|CSPEctrum|MTIME|MSPEctrum|RTIME|RSPEctrum|EVTime|EVSpectrum|IQMEError|IQPEError|SYMBol|SUMMARY|RTTrace
 :DISPlay:DDEMod:TRACe<n>:FEED?

Description

Sets the data source of the specified trace.
 Queries the data source of the specified trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4	--
--	Keyword	CTIME CSPEctrum MTIME MSPEctrum RTIME RSPEctrum EVTime EVSpectrum IQMEError IQPEError SYMBol SUMMARY RTTrace	MEATime

Return Format

The query returns the data source of the specified trace.

Example

The following command sets the data source of Trace 1 to symbol.
 :DISPlay:DDEMod:TRACe1:FEED SYMBol

The following query returns SYMB.
:DISPlay:DDEMod:TRACe1:FEED?

:DISPlay:DDEMod:TRACe<n>:FORMat

Syntax

```
:DISPlay:DDEMod:TRACe<n>:FORMat
IEYE|QEYE|CONS|MLOG|REAL|IMAGinary|VECTor|PHASe|UPHas|MLINear
:DISPlay:DDEMod:TRACe<n>:FORMat?
```

Description

Sets the display format of the specified trace.
Queries the display format of the specified trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4	--
--	Keyword	IEYE QEYE CONS MLOG REAL IMAGinary VECTor PHASe UPHas MLINear	VECTor

Remarks

IEYE: indicates I-Eye.
QEYE: indicates Q-Eye.
CONS: indicates constellation.
MLOG: indicates log magnitude.
REAL: indicates the real part of data.
IMAGinary: indicates the imaginary part of data.
VECTor: indicates the I-Q vector.
PHASe: indicates wrap phase.
UPHas: indicates unwrap phase.
MLINear: indicates line magnitude.

Return Format

The query returns IEYE, QEYE, CONS, MLOG, REAL, IMAG, VECT, PHAS, UPH, or MLIN.

Example

The following command sets the display format of Trace 1 to CONS.
:DISPlay:DDEMod:TRACe1:FORMat CONS

The following query returns CONS.
:DISPlay:DDEMod:TRACe1:FORMat?

:DISPlay:DDEMod:TRACe<n>:X[:SCALE]:COUPle

Syntax

```
:DISPlay:DDEMod:TRACe<n>:X[:SCALE]:COUPle OFF|ON|0|1
:DISPlay:DDEMod:TRACe<n>:X[:SCALE]:COUPle?
```

Description

Enables or disables the X Scale auto mode of the specified trace.
Queries the status of the X Scale auto mode for the specified trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4	--
--	Bool	OFF ON 0 1	ON 1

Remarks

ON: sets to Auto mode. The instrument adjusts the X-axis reference value and X-axis width to an optimal state.

OFF: sets to Manual mode. You need to set the X-axis reference value and X-axis width manually.

Return Format

The query returns 0 or 1.

Example

The following command enables the X Scale auto mode of Trace 1.

:DISPlay:DDEMod:TRACe1:X:SCALE:COUPle ON or :DISPlay:DDEMod:TRACe1:X:SCALE:COUPle 1

The following query returns 1.

:DISPlay:DDEMod:TRACe1:X:SCALE:COUPle?

:DISPlay:DDEMod:TRACe<n>:X[:SCALE]:RLEVel**Syntax**

:DISPlay:DDEMod:TRACe<n>:X[:SCALE]:RLEVel <real>

:DISPlay:DDEMod:TRACe<n>:X[:SCALE]:RLEVel?

Description

Sets the X-axis reference of the selected trace.

Queries the X-axis reference of the selected trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4	--
<real>	Consecutive Real Number	Time-Domain Data: (-1e+12) to (1e+12) Frequency-Domain Data: -1THz to 1THz	0 (0 us) /998.4375 MHz

Remarks

This command is valide only when the X-axis scale is set to Manual.

When the time-domain data source is selected, the reference unit is symbol or s; when the frequency-domain data source is selected, the reference unit is Hz.

Return Format

The query returns the X-axis reference of the selected trace in scientific notation.

Example

The following command sets the X-axis reference of Trace 1 to 25.

:DISPlay:DDEMod:TRACe1:X:SCALE:RLEVel 25

The following query returns 2.500000000e+01.

:DISPlay:DDEMod:TRACe1:X:SCALE:RLEVel?

:DISPlay:DDEMod:TRACe<n>:X[:SCALe]:RPOSition

Syntax

```
:DISPlay:DDEMod:TRACe<n>:X[:SCALe]:RPOSition LEFT|CENTer|RIGHT
:DISPlay:DDEMod:TRACe<n>:X[:SCALe]:RPOSition?
```

Description

Sets the position from which the X-axis scale reference value is calculated for the specified trace.
Queries the position from which the X-axis scale reference value is calculated for the specified trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4	--
--	Keyword	LEFT CENTer RIGHT	LEFT

Return Format

The query returns LEFT, CENT, or RIGH.

Example

The following command sets the position from which the X-axis scale reference value is calculated for Trace 1 to LEFT.

```
:DISPlay:DDEMod:TRACe1:X:SCALe:RPOSition LEFT
```

The following query returns LEFT.

```
:DISPlay:DDEMod:TRACe1:X:SCALe:RPOSition?
```

:DISPlay:DDEMod:TRACe<n>:X[:SCALe]:SPAN

Syntax

```
:DISPlay:DDEMod:TRACe<n>:X[:SCALe]:SPAN <real>
:DISPlay:DDEMod:TRACe<n>:X[:SCALe]:SPAN?
```

Description

Sets the X-axis width of the selected trace.
Queries the X-axis width of the selected trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4	--
<real>	Consecutive Real Number	Time-Domain Data: 0 to (1e+12) Frequency-Domain Data: 0Hz to 1THz	50 (38.2812 us) /3.125 MHz

Remarks

This command is valide only when the X-axis scale is set to Manual.
When the time-domain data source is selected, the reference unit is symbol or s; when the frequency-domain data source is selected, the reference unit is Hz.

Return Format

The query returns the X-axis width of the selected trace in scientific notation.

Example

The following command sets the X-axis width of Trace 1 to 50.

:DISPlay:DDEMod:TRACe1:X:SCALE:SPAN 50
 The following query returns 5.000000000e+01.
 :DISPlay:DDEMod:TRACe1:X:SCALE:SPAN?

:DISPlay:DDEMod:TRACe<n>:Y[:SCALE]:AUTO:ONCE

Syntax

:DISPlay:DDEMod:TRACe<n>:Y[:SCALE]:AUTO:ONCE

Description

Sets the Y-axis reference level and the Y-axis scale value automatically to ensure that the signal can be fully displayed for better observation of the trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4	--

Example

The following command executes the auto scale operation for Trace 1.
 :DISPlay:DDEMod:TRACe1:Y:SCALE:AUTO:ONCE

:DISPlay:DDEMod:TRACe<n>:Y[:SCALE]:PDIVision

Syntax

:DISPlay:DDEMod:TRACe<n>:Y[:SCALE]:PDIVision <rel>
 :DISPlay:DDEMod:TRACe<n>:Y[:SCALE]:PDIVision?

Description

Sets the Y-axis scale of the specified trace.
 Queries the Y-axis scale of the specified trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4	--
<rel>	Consecutive Real Number	-1e+09 to 1e+12	0.3

Remarks

The scale unit is determined by the Y-axis unit.

Return Format

The query returns the Y-axis scale value in scientific notation.

Example

The following command sets the Y-axis scale value of Trace 1 to 0.3.
 :DISPlay:DDEMod:TRACe1:Y:SCALE:PDIVision 0.3

The following query returns 3.000000000e-01.
 :DISPlay:DDEMod:TRACe1:Y:SCALE:PDIVision?

:DISPlay:DDEMod:TRACe<n>:Y[:SCALe]:RLEVel

Syntax

:DISPlay:DDEMod:TRACe<n>:Y[:SCALe]:RLEVel <real>
:DISPlay:DDEMod:TRACe<n>:Y[:SCALe]:RLEVel?

Description

Sets the Y-axis reference of the specified trace.
Queries the Y-axis reference of the specified trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4	--
<ampl>	Consecutive Real Number	-1e+12 to 1e+12	0

Remarks

The reference unit is determined by the Y-axis unit.

Return Format

The query returns the reference in scientific notation.

Example

The following command sets the Y-axis reference of Trace 1 to -10 dB.
:DISPlay:DDEMod:TRACe1:Y:SCALe:RLEVel -10

The following query returns -1.000000000e+01.
:DISPlay:DDEMod:TRACe1:Y:SCALe:RLEVel?

:DISPlay:DDEMod:TRACe<n>:Y:UNIT:PREFerece

Syntax

:DISPlay:DDEMod:TRACe<n>:Y:UNIT:PREFerece PEAK|RMS|POWer
:DISPlay:DDEMod:TRACe<n>:Y:UNIT:PREFerece?

Description

Sets the Y-axis unit of the specified trace.
Queries the Y-axis unit of the specified trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4	--
--	Keyword	PEAK RMS POWer	PEAK

Remarks

This command is valid when the data source is "CaptureTime" or "CaptureSpectrum".

Return Format

The query returns PEAK, RMS, or POW.

Example

The following command sets the Y-axis unit of Trace 1 to PEAK.
:DISPlay:DDEMod:TRACe1:Y:UNIT:PREFerece PEAK

The following query returns PEAK.
:DISPlay:DDEMod:TRACe1:Y:UNIT:PREFerece?

:DISPlay:DDEMod:WINDow:FORMat

Syntax

:DISPlay:DDEMod:WINDow:FORMat SINGLE|LRWindow|UDWindow|LRDWindow|UDRWindow|QUAD
:DISPlay:DDEMod:WINDow:FORMat?

Description

Sets the trace window layout.

Queries the trace window layout.

Parameter

Name	Type	Range	Default
--	Keyword	SINGLE LRWindow UDWindow LRDWindow UDRWindow QUAD	QUAD

Remarks

SINGLE: indicates the single window.

LRWindow: indicates left and right windows.

UDWindow: indicates top and bottom windows.

LRDWindow: indicates left, right, and bottom windows.

UDRWindow: indicates left, bottom, and right windows.

QUAD: indicates four windows.

Return Format

The query returns SING, LRW, UDW, LRDW, UDRW, or QUAD.

Example

The following command sets the trace window layout to SINGLE.

:DISPlay:DDEMod:WINDow:FORMat SINGLE

The following query returns SING.

:DISPlay:DDEMod:WINDow:FORMat?

:DISPlay:ENABLE

Syntax

:DISPlay:ENABLE OFF|ON|0|1
:DISPlay:ENABLE?

Description

Turns on or off the LCD.

Queries the status of the LCD.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command enables the LCD.

:DISPlay:ENABLE ON or :DISPlay:ENABLE 1

The following query returns 1.

:DISPlay:ENABLE?

:DISPlay:GRATicule[:STATe]

Syntax

:DISPlay:GRATicule[:STATe] OFF|ON|0|1
:DISPlay:GRATicule[:STATe]?

Description

Enables or disables the display of the graticule.
Queries the display of the graticule.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command enables display of the graticule.
:DISPlay:GRATicule:STATe ON or :DISPlay:GRATicule:STATe 1

The following query returns 1.
:DISPlay:GRATicule:STATe?

:DISPlay:HDMI[:STATe]

Syntax

:DISPlay:HDMI[:STATe] OFF|ON|0|1
:DISPlay:HDMI[:STATe]?

Description

Enables or disables HDMI output.
Queries the status of HDMI output.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command enables HDMI output.
:DISPlay:HDMI:STATe ON or :DISPlay:HDMI:STATe 1

The following query returns 1.
:DISPlay:HDMI:STATe?

:FETCh Commands

Command List:

- ◆ [:FETCh:BER?](#)
- ◆ [:FETCh:DDEMod?](#)

:FETCh:BER?

Syntax

:FETCh:BER?

Description

Queries the bit error rate measurement results.

:FETCh:DDEMod?

Syntax

:FETCh:DDEMod?

Description

Queries the digital demodulation measurement results.

:FORMat Commands

Command List:

- ◆ [:FORMat:BORDER](#)
- ◆ [:FORMat\[:TRACe\]\[:DATA\]](#)

:FORMat:BORDER

Syntax

```
:FORMat:BORDER NORMal|SWAPped
:FORMat:BORDER?
```

Description

Selects the binary data byte order for data transmission.
Queries the binary data byte order for data transmission.

Parameter

Name	Type	Range	Default
--	Keyword	NORMal SWAPped	NORMal

Remarks

NORMal: indicates that the byte sequence begins with the most significant byte (MSB) and ends with the least significant byte (LSB).
SWAPped: indicates that the byte sequence begins with the least significant byte (LSB) and ends with the most significant byte (MSB).

Return Format

The query returns NORM or SWAP.

Example

The following command queries the binary data byte order for data transmission to NORMal.
:FORMat:BORDER NORMal

The following query returns NORM.
:FORMat:BORDER?

:FORMat[:TRACe][:DATA]

Syntax

```
:FORMat[:TRACe][:DATA] ASCii|INTeger,32|REAL,32|REAL,64
:FORMat[:TRACe][:DATA]?
```

Description

Sets the input/output format of the trace data.
Queries the input/output format of the trace data.

Parameter

Name	Type	Range	Default
--	Keyword	ASCii INTeger,32 REAL,32 REAL,64	ASCii

Remarks

ASCIi: ASCII characters, separated by commas.

INTeger,32: binary 32-bit integer values.

REAL,32: binary 32-bit real values.

REAL,64: binary 64-bit real values.

Return Format

The query returns ASC,8, INT,32, REAL,32, or REAL,64.

Example

The following command sets the input/output format of the trace data to REAL,32.

```
:FORMat:TRACe:DATA REAL,32
```

The following query returns REAL,32.

```
:FORMat:TRACe:DATA?
```

IEEE 488.2 Common Commands

IEEE 488.2 common commands are used to operate or query the status registers. For details of the commands, refer to Page "2-81".

:INITiate Commands

Command List:

- ◆ [:INITiate:BER:REStart](#)
- ◆ [:INITiate:CONTinuous](#)

:INITiate:BER:REStart

Syntax

:INITiate:BER:REStart

Description

Restarts the BER test.

Remarks

This command is valide only when the BER Test measurement function is selected.

:INITiate:CONTinuous

Syntax

:INITiate:CONTinuous OFF|ON|0|1
:INITiate:CONTinuous?

Description

Selects continuous (ON|1) or single (OFF|0) sweep mode.
Queries the current sweep mode.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command sets the instrument to sweep continuously.

:INITiate:CONTinuous ON or :INITiate:CONTinuous 1

The following query returns 1.

:INITiate:CONTinuous?

:INSTrument Commands

Command List:

- ◆ [:INSTrument:COUPle:FREQuency:CENTer](#)
- ◆ [:INSTrument:DEFault](#)
- ◆ [:INSTrument:NSElect](#)
- ◆ [:INSTrument\[:SElect\]](#)

:INSTrument:COUPle:FREQuency:CENTer

Syntax

:INSTrument:COUPle:FREQuency:CENTer ALL|NONE
:INSTrument:COUPle:FREQuency:CENTer?

Description

Turns on or off the global center frequency of the instrument.
Queries the setting status of the global center frequency of the instrument.

Parameter

Name	Type	Range	Default
--	Keyword	ALL NONE	NONE

Remarks

NONE: turns off the global center frequency.

ALL: turns on the global center frequency.

If you execute this command in any mode, the center frequency of the current mode is set to the global center frequency. Adjusting the center frequency in a mode, while the global center frequency is on, will modify the global center frequency.

Return Format

The query returns ALL or NONE.

Example

The following command enables the global center frequency of the instrument.

:INSTrument:COUPle:FREQuency:CENTer ALL

The following query returns ALL.

:INSTrument:COUPle:FREQuency:CENTer?

:INSTrument:DEFault

Syntax

:INSTrument:DEFault

Description

Resets the parameters of the current mode to the factory default settings.

:INSTRument:NSElect

:INSTRument[:SElect]

Syntax

```
:INSTRument:NSElect 1|2|3|4  
:INSTRument:NSElect?  
:INSTRument[:SElect] SA|RTSA|VSA|EMI  
:INSTRument[:SElect]?
```

Description

Selects the working mode of the instrument.
Queries the working mode of the instrument.

Parameter

Name	Type	Range	Default
--	Discrete	1 2 3 4	1
--	Keyword	SA RTSA VSA EMI	SA

Remarks

The above parameters 1|2|3|4 correspond to SA|RTSA|VSA|EMI, respectively.
After running the command of switching the working mode, we recommend you set the timeout value to 8 s, or perform the next operation after a delay of 8 s.

Example

The following command sets the working mode of the instrument to VSA.

```
:INSTRument:NSElect 3  
:INSTRument:SElect VSA
```

The following query returns 3 or VSA.

```
:INSTRument:NSElect?  
:INSTRument:SElect?
```


:MMEMory Commands

Command List:

- ◆ [:MMEMory:DELeTe](#)
- ◆ [:MMEMory:LOAD:FMT](#)
- ◆ [:MMEMory:LOAD:STATe](#)
- ◆ [:MMEMory:LOAD:TRACe:DATA](#)
- ◆ [:MMEMory:MOVE](#)
- ◆ [:MMEMory:STORe:FMT](#)
- ◆ [:MMEMory:STORe:SCReen](#)
- ◆ [:MMEMory:STORe:STATe](#)
- ◆ [:MMEMory:STORe:TRACe:DATA](#)

Remarks:

The mode name in the path specified in this manual is "VSA" mode.

:MMEMory:DELeTe

Syntax

:MMEMory:DELeTe <file_name>

Description

Deletes a specified file.

Parameter

Name	Type	Range	Default
<file_name>	ASCII String	--	--

Remarks

<file_name> should contain the path and the filename.

This operation fails if the file with the specified filename does not exist.

Example

The following command deletes the "state1.sta" file from the "/vsa/state" folder.

```
:MMEMory:DELeTe /vsa/state/state1.sta
```

:MMEMory:LOAD:FMT

Syntax

:MMEMory:LOAD:FMT <label>,<file_name>

Description

Loads the edited FMT file (.csv).

Parameter

Name	Type	Range	Default
<label>	Keyword	UPPer LOWer	----
<file_name>	ASCII String	----	----

Remarks

This operation fails if the specified file does not exist.

Example

The following command loads the FMT file (mask1.csv) to the upper mask.

```
:MMEMory:LOAD:FMT upper,mask1.csv
```

:MMEMory:LOAD:STATE**Syntax**

```
:MMEMory:LOAD:STATE <file_name>
```

Description

Loads the specified state file (.sta).

Parameter

Name	Type	Range	Default
<file_name>	ASCII String	--	--

Remarks

This operation fails if the file with the specified filename does not exist.

Example

The following command loads the state file (state1.sta) to the instrument.

```
:MMEMory:LOAD:STATE state1.sta
```

:MMEMory:LOAD:TRACE:DATA**Syntax**

```
:MMEMory:LOAD:TRACE:DATA <label>,<file_name>
```

Description

Loads the specified measurement data file (suffixed with .csv).

Parameter

Name	Type	Range	Default
<label>	Keyword	TRACE1 TRACE2 TRACE3 TRACE4	--
<file_name>	ASCII String	--	--

Remarks

This operation fails if the file with the specified filename does not exist.

Example

The following command loads the measurement data file (trace1.csv) to Trace1.

```
:MMEMory:LOAD:TRACE:DATA TRACE1,trace1.csv
```

:MMEMory:MOVE

Syntax

:MMEMory:MOVE <file_name1>,<file_name2>

Description

Renames the specified file <file_name1> as <file_name2>.

Parameter

Name	Type	Range	Default
<file_name1>	ASCII String	--	--
<file_name2>	ASCII String	--	--

Remarks

<file_name1> and <file_name2> should contain the path and the filename.
This operation fails if the file with the specified filename does not exist.

Example

The following command renames the state file (state1.sta) in the folder (/vsa/state) as "state2.sta".
:MMEMory:MOVE /vsa/state/state1.sta,/vsa/state/state2.sta

:MMEMory:STORe:FMT

Syntax

:MMEMory:STORe:FMT <label>,<file_name>

Description

Saves the FMT file with a specified filename suffixed with ".csv" to the default path ("/mode name"/mask).

Parameter

Name	Type	Range	Default
<label>	Keyword	UPPer LOWer	--
<file_name>	ASCII String	--	--

Remarks

If the specified file already exists, overwrite it.

Example

The following command saves the upper mask FMT file with the filename (mask1.csv) to the "/vsa/mask" folder.

:MMEMory:STORe:FMT UPPer,mask1

:MMEMory:STORe:SCReen

Syntax

:MMEMory:STORe:SCReen <file_name>

Description

Saves the current screen image with the specified filename suffixed with ".jpg", ".png/", or ".bmp" to the default path ("/mode name"/screen).

Parameter

Name	Type	Range	Default
<file_name>	ASCII String	--	--

Remarks

If the specified file already exists, overwrite it.

If a suffix (.jpg/.png/.bmp) is added to the filename, you can save the current screen image with a different format based on its different suffix.

If no suffix is added to the filename, then by default, the current screen image is saved in the currently selected format.

Example

The following command saves the current screen image with the filename "screen.jpg" to the folder (/vsa/screen).

```
:MMEMory:STORe:SCReen screen.jpg
```

:MMEMory:STORe:STATe**Syntax**

```
:MMEMory:STORe:STATe <file_name>
```

Description

Saves the current instrument state with the specified filename suffixed with ".sta" to the default path ("/mode name"/state).

Parameter

Name	Type	Range	Default
<file_name>	ASCII String	--	--

Remarks

If the specified file already exists, overwrite it.

Example

The following command saves the current instrument state with the filename "state.sta" to the folder (/vsa/state).

```
:MMEMory:STORe:STATe state
```

:MMEMory:STORe:TRACe:DATA**Syntax**

```
:MMEMory:STORe:TRACe:DATA <label>,<file_name>
```

Description

Saves the trace measurement results with a specified filename suffixed with ".csv" to the default path ("/mode name"/data).

Parameter

Name	Type	Range	Default
<label>	Keyword	TRACE1 TRACE2 TRACE3 TRACE4	--
<file_name>	ASCII String	--	--

Remarks

If the specified file already exists, overwrite it.

Example

The following command saves Trace1 measurement data with the specified filename "mydata.csv" to the folder (/vsa/data).

```
:MMEMory:STORe:TRACe:DATA TRACE1,mydata
```

[[:SENSe] Commands

Command List:

- ◆ [\[:SENSe\]:ACQuisition:TIME](#)
- ◆ [:INPut:IMPedance](#)
- ◆ [\[:SENSe\]:CORRection:IMPedance\[:INPut\]\[:MAGNitude\]](#)
- ◆ [\[:SENSe\]:CORRection:SA\[:RF\]:GAIN](#)
- ◆ [\[:SENSe\]:DDEMod:ALPHA](#)
- ◆ [\[:SENSe\]:DDEMod:FFT:WINDow\[:TYPE\]](#)
- ◆ [\[:SENSe\]:DDEMod:FILTer:MEASurement](#)
- ◆ [\[:SENSe\]:DDEMod:FILTer:MEASurement:USER<n>\[:DATA\]](#)
- ◆ [\[:SENSe\]:DDEMod:FILTer:REference](#)
- ◆ [\[:SENSe\]:DDEMod:FILTer:REference:USER<n>\[:DATA\]](#)
- ◆ [\[:SENSe\]:DDEMod:FSK:DEVIation:REference](#)
- ◆ [\[:SENSe\]:DDEMod:FSK:DEVIation:REference:AUTO](#)
- ◆ [\[:SENSe\]:DDEMod:LOAD:KNOWndata](#)
- ◆ [\[:SENSe\]:DDEMod:MODulation](#)
- ◆ [\[:SENSe\]:DDEMod:PPSYmbol](#)
- ◆ [\[:SENSe\]:DDEMod:RTTTrace:DETector](#)
- ◆ [\[:SENSe\]:DDEMod:SRATe](#)
- ◆ [\[:SENSe\]:DDEMod:STANdard:PRESet](#)
- ◆ [\[:SENSe\]:DDEMod:SWEEp:POINts](#)
- ◆ [\[:SENSe\]:DDEMod:SYNC:ALENgtH](#)
- ◆ [\[:SENSe\]:DDEMod:SYNC:BURSt:RUNIn](#)
- ◆ [\[:SENSe\]:DDEMod:SYNC:BURSt:STATe](#)
- ◆ [\[:SENSe\]:DDEMod:SYNC:SLENgtH](#)
- ◆ [\[:SENSe\]:DDEMod:SYNC:SWORd:OFFSet](#)
- ◆ [\[:SENSe\]:DDEMod:SYNC:SWORd:PATtern](#)
- ◆ [\[:SENSe\]:DDEMod:SYNC:SWORd:STATe](#)
- ◆ [\[:SENSe\]:FREQuency:CENTer](#)
- ◆ [\[:SENSe\]:FREQuency:CENTer:STEP:AUTO](#)
- ◆ [\[:SENSe\]:FREQuency:CENTer:STEP\[:INCRement\]](#)
- ◆ [\[:SENSe\]:FREQuency:SPAN?](#)
- ◆ [\[:SENSe\]:FREQuency:STARt](#)
- ◆ [\[:SENSe\]:FREQuency:STOP](#)
- ◆ [\[:SENSe\]:POWer\[:RF\]:RANGe](#)

[:SENSe]:ACQuisition:TIME

Syntax

```
[ :SENSe]:ACQuisition:TIME <time>
[ :SENSe]:ACQuisition:TIME?
```

Description

Sets the acquisition time for producing one single trace.
Queries the acquisition time for producing one single trace.

Parameter

Name	Type	Range	Default
<time>	Consecutive Real Number	100 ms to 40 s	99.9946 ms

Return Format

The query returns the acquisition time in scientific notation.

Example

The following command sets the acquisition time to 10 s.
:SENSe:ACQuisition:TIME 10

The following query returns 9.999997623e+00.
:SENSe:ACQuisition:TIME?

:INPut:IMPedance

[:SENSe]:CORRection:IMPedance[:INPut][:MAGNitude]

Syntax

```
:INPut:IMPedance 50|75
:INPut:IMPedance?
[ :SENSe]:CORRection:IMPedance[:INPut][:MAGNitude] 50|75
[ :SENSe]:CORRection:IMPedance[:INPut][:MAGNitude]?
```

Description

Sets the input impedance for voltage-to-power conversion. The unit is Ω .
Queries the input impedance for voltage-to-power conversion.

Parameter

Name	Type	Range	Default
--	Discrete	50 75	50

Remarks

If the output impedance of the system under measurement is 75 Ω , you should use a 75 Ω to 50 Ω adapter (option) supplied by **RIGOL** to connect the analyzer with the system under test, and then set the input impedance to 75 Ω .

Return Format

The query returns 50 or 75.

Example

The following command sets the input impedance to 75 Ω .
:INPut:IMPedance 75 or :SENSe:CORRection:IMPedance:INPut:MAGNitude 75

The following query returns 75.
:INPut:IMPedance? or :SENSe:CORRection:IMPedance:INPut:MAGNitude?

[[:SENSe]:CORRection:SA[:RF]:GAIN

Syntax

[[:SENSe]:CORRection:SA[:RF]:GAIN <rel_ampl>
[:SENSe]:CORRection:SA[:RF]:GAIN?

Description

Sets the external gain.
Queries the external gain.

Parameter

Name	Type	Range	Default
<rel_ampl>	Consecutive Real Number	-120 dB to 120 dB	0 dB

Return Format

The query returns the external gain value in scientific notation. The unit is dB.

Example

The following command sets the external gain value to 20 dB.
:SENSe:CORRection:SA:RF:GAIN 20

The following query returns 2.000000000e+01.
:SENSe:CORRection:SA:RF:GAIN?

[[:SENSe]:DDEMod:ALPHa

Syntax

[[:SENSe]:DDEMod:ALPHa <real>
[:SENSe]:DDEMod:ALPHa?

Description

Sets the roll-off factor of the raised cosine or the BT value of the Gaussian filter.
Queries the roll-off factor of the raised cosine or the BT value of the Gaussian filter.

Parameter

Name	Type	Range	Default
<real>	Consecutive Real Number	0.05 to 100	0.22

Return Format

The query returns the roll-off factor or the BT value in scientific notation.

Example

The following command sets the roll-off factor of the raised cosine to 0.22.
:SENSe:DDEMod:ALPHa 0.22

The following query returns 2.200000000e-01.
:SENSe:DDEMod:ALPHa?

[[:SENSe]:DDEMod:FFT:WINDow[:TYPE]

Syntax

[[:SENSe]:DDEMod:FFT:WINDow[:TYPE] UNIFORM|HANNing|GAUSSian|FLATtop
[:SENSe]:DDEMod:FFT:WINDow[:TYPE]?

Description

Sets the type of the FFT window function.
Queries the type of the FFT window function.

Parameter

Name	Type	Range	Default
--	Keyword	UNIFORM HANNing GAUSSian FLATtop	UNIFORM

Return Format

The query returns UNIFORM, HANN, GAUS, or FLAT.

Example

The following command sets the type of the FFT window function to GAUSSian.
[:SENSe]:DDEMod:FFT:WINDow:TYPE GAUSSian

The following query returns GAUS.
[:SENSe]:DDEMod:FFT:WINDow:TYPE?

[[:SENSe]:DDEMod:FILTer:MEASurement

Syntax

[[:SENSe]:DDEMod:FILTer:MEASurement NONE|RRCosine|GAUSSian|RECTangle|USER<n>
[:SENSe]:DDEMod:FILTer:MEASurement?

Description

Sets the measurement filter type.
Queries the measurement filter type.

Parameter

Name	Type	Range	Default
--	Keyword	NONE RRCosine GAUSSian RECTangle USER	RRCosine
<n>	Discrete	1 2 3 4 5 6	---

Remarks

NONE: disables the filter.
RRCosine: indicates the root raised cosine.
GAUSSian: indicates the Gaussian filter.
RECTangle: indicates the rectangular filter.
USER<n>: indicates the user-defined filter n (1 to 6).

Return Format

The query returns NONE, RRC, GAUS, RECT, USER1, USER2, USER3, USER4, USER5, or USER6.

Example

The following command sets the measurement filter to GAUSSian.
[:SENSe]:DDEMod:FILTer:MEASurement GAUSSian

The following query returns GAUS.
[:SENSe]:DDEMod:FILTer:MEASurement?

[[:SENSe]:DDEMod:FILTer:MEASurement:USER<n>[:DATA]

Syntax

[[:SENSe]:DDEMod:FILTer:MEASurement:USER<n>[:DATA] <ampl>{,<ampl>}
[[:SENSe]:DDEMod:FILTer:MEASurement:USER<n>[:DATA]?

Description

Sets the data of the specified measurement user-defined filter.
Queries the data of the specified measurement user-defined filter.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	---
<ampl>	Consecutive Real Number	---	---

Return Format

The query returns the user-defined filter data in scientific notation.

Example

The following command sets the data of the measurement user-defined filter 1.

```
:SENSe:DDEMod:FILTer:MEASurement:USER1:DATA -0.000321525,0.00294817,0.002500879,-  
0.001910775,-0.005052538
```

The following query returns -3.215250000e-04,2.948170000e-03,2.500879000e-03,-1.910775000e-03,-
5.052538000e-03.

```
:SENSe:DDEMod:FILTer:MEASurement:USER1:DATA?
```

[[:SENSe]:DDEMod:FILTer:REference

Syntax

[[:SENSe]:DDEMod:FILTer:REference RCOSine|RRCosine|GAUSSian|RECTangle|HSINe|USER<n>
[[:SENSe]:DDEMod:FILTer:REference?

Description

Sets the reference filter type.
Queries the reference filter type.

Parameter

Name	Type	Range	Default
--	Keyword	RCOSine RRCosine GAUSSian RECTangle HSINe USER	RCOSine
<n>	Discrete	1 2 3 4 5 6	---

Remarks

RCOSine: indicates the raised cosine filter.
RRCosine: indicates the root raised cosine.
GAUSSian: indicates the Gaussian filter.
RECTangle: indicates the rectangular filter.
HSINe: indicates the half-sine filter.
USER<n>: indicates the user-defined filter n (1 to 6).

Return Format

The query returns RCOS, RRC, GAUS, RECT, HSIN, USER1, USER2, USER3, USER4, USER5, or USER6.

Example

The following command sets the reference filter to GAUSSian.

```
:SENSe:DDEMod:FILTer:REFeRence GAUSSian
```

The following query returns GAUS.

```
:SENSe:DDEMod:FILTer:REFeRence?
```

[[:SENSe]:DDEMod:FILTer:REFeRence:USER<n>[:DATA]**Syntax**

```
[[:SENSe]:DDEMod:FILTer:REFeRence:USER<n>[:DATA] <ampl>{,<ampl>}
```

```
[[:SENSe]:DDEMod:FILTer:REFeRence:USER<n>[:DATA]?
```

Description

Sets the data of the specified reference user-defined filter.

Queries the data of the specified reference user-defined filter.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4 5 6	——
<ampl>	Consecutive Real Number	——	——

Return Format

The query returns the user-defined filter data in scientific notation.

Example

The following command sets the data of the reference user-defined filter 1.

```
:SENSe:DDEMod:FILTer:REFeRence:USER1:DATA -0.000321525,0.00294817,0.002500879,-  
0.001910775,-0.005052538
```

The following query returns -3.215250000e-04,2.948170000e-03,2.500879000e-03,-1.910775000e-03,-5.052538000e-03.

```
:SENSe:DDEMod:FILTer:REFeRence:USER1:DATA?
```

[[:SENSe]:DDEMod:FSK:DEVIation:REFeRence**Syntax**

```
[[:SENSe]:DDEMod:FSK:DEVIation:REFeRence <freq>
```

```
[[:SENSe]:DDEMod:FSK:DEVIation:REFeRence?
```

Description

Sets the reference frequency offset in the FSK modulation.

Queries the reference frequency offset in the FSK modulation.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	1 kHz to 1T Hz	1 kHz

Remarks

This command is only valid when you select FSK as the modulation format and reference deviation mode is set to Manual.

Return Format

The query returns the reference frequency offset in scientific notation. The unit is Hz.

Example

The following command sets the reference frequency offset to 1 MHz.

```
:SENSe:DDEMod:FSK:DEVIation:REFeRence 1000000
```

The following query returns 1.000000000e+06.

```
:SENSe:DDEMod:FSK:DEVIation:REFeRence?
```

[[:SENSe]:DDEMod:FSK:DEVIation:REFeRence:AUTO**Syntax**

```
[[:SENSe]:DDEMod:FSK:DEVIation:REFeRence:AUTO ON|OFF|1|0
```

```
[[:SENSe]:DDEMod:FSK:DEVIation:REFeRence:AUTO?
```

Description

Enables or disables the reference frequency offset mode in the FSK modulation.

Queries the status of the reference frequency offset mode in the FSK modulation.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	ON 1

Remarks

ON|1: indicates that Auto mode is selected.

OFF|0: indicates that Manual mode is selected.

This command is only valid when you select FSK as the modulation format.

Return Format

The query returns 0 or 1.

Example

The following command sets the reference frequency offset mode in the FSK modulation to Auto.

```
:SENSe:DDEMod:FSK:DEVIation:REFeRence:AUTO ON
```

```
or :SENSe:DDEMod:FSK:DEVIation:REFeRence:AUTO 1
```

The following query returns 1.

```
:SENSe:DDEMod:FSK:DEVIation:REFeRence:AUTO?
```

[[:SENSe]:DDEMod:LOAD:KNOWndata**Syntax**

```
[[:SENSe]:DDEMod:LOAD:KNOWndata <path>
```

```
[[:SENSe]:DDEMod:LOAD:KNOWndata?
```

Description

Loads the BER test file from the specified path.

Queries the BER test file.

Parameter

Name	Type	Range	Default
<path>	Consecutive Real Number	--	--

Remarks

Before performing the BER test, load the BER test reference file (.xml) first.
 <path> should contain the path and the filename.

Return Format

The query returns the BER test filename.

Example

The following command loads the BER test file "ber1.xml" from the path "/vsa/BerTest".
 :SENSe:DDEMod:LOAD:KNOWndata /vsa/BerTest/ber1.xml

The following query returns ber1.
 :SENSe:DDEMod:LOAD:KNOWndata?

[:SENSe]:DDEMod:MODulation**Syntax**

[:SENSe]:DDEMod:MODulation FSK2|FSK4|FSK8|ASK2|ASK4
 [:SENSe]:DDEMod:MODulation?

Description

Sets the modulation mode.
 Queries the modulation mode.

Parameter

Name	Type	Range	Default
--	Keyword	FSK2 FSK4 FSK8 ASK2 ASK4	FSK2

Return Format

The query returns FSK2, FSK4, FSK8, ASK2, or ASK4.

Example

The following command sets the modulation mode to FSK2.
 :SENSe:DDEMod:MODulation FSK2

The following query returns FSK2.
 :SENSe:DDEMod:MODulation?

[:SENSe]:DDEMod:PPSYmbol**Syntax**

[:SENSe]:DDEMod:PPSYmbol <integer>
 [:SENSe]:DDEMod:PPSYmbol?

Description

Sets points/symbol in digital demodulation.
 Queries points/symbol in digital demodulation.

Parameter

Name	Type	Range	Default
<integer>	Discrete	4 8	4

Return Format

The query returns points/symbol in integer.

Example

The following command sets points/symbol to 4.

```
:SENSe:DDEMod:PPSYmbol 4
```

The following query returns 4.

```
:SENSe:DDEMod:PPSYmbol?
```

[[:SENSe]:DDEMod:RTTrace:DETECTOR**Syntax**

```
[[:SENSe]:DDEMod:RTTrace:DETECTOR POSitive|NEGative|AVERage|SAMple
```

```
[[:SENSe]:DDEMod:RTTrace:DETECTOR?
```

Description

Sets the detector for the current real-time spectrum trace.

Queries the detector for the current real-time spectrum trace.

Parameter

Name	Type	Range	Default
----	Keyword	POSitive NEGative AVERage SAMple	POSitive

Remarks

This command is valid only when the "RT Trace" data source is selected.

Return Format

The query returns POS, NEG, AVER or SAM.

Example

The following command sets the detector to POSitive.

```
:SENSe:DDEMod:RTTrace:DETECTOR POSitive
```

The following query returns POS.

```
:SENSe:DDEMod:RTTrace:DETECTOR?
```

[[:SENSe]:DDEMod:SRATE**Syntax**

```
[[:SENSe]:DDEMod:SRATE <frequency>
```

```
[[:SENSe]:DDEMod:SRATE?
```

Description

Sets the symbol rate of the digital demodulation.

Queries the symbol rate of the digital demodulation.

Parameter

Name	Type	Range	Default
<frequency>	Consecutive Real Number	Refer to " Remarks "	1 MHz

Remarks

The minimum symbol rate is 1 kHz.

The maximum symbol rate $SR_{max} = SP_{max} \times 1.28 / (\text{points/symbol})$. Wherein, SP_{max} is the maximum span.

Return Format

The query returns the symbol rate in scientific notation.

Example

The following command sets the symbol rate to 1 MHz.

```
:SENSe:DDEMod:SRATe 1000000
```

The following query returns 1.000000000e+06.

```
:SENSe:DDEMod:SRATe?
```

[:SENSe]:DDEMod:STANdard:PRESet**Syntax**

```
[ :SENSe ]:DDEMod:STANdard:PRESet BLUETOOTH|DECT|APCO
```

Description

Sets the preset standard of the digital demodulation.

Parameter

Name	Type	Range	Default
--	Keyword	BLUETOOTH DECT APCO	--

Return Format

The query returns BLUETOOTH, DECT, or APCO.

Example

The following command sets the preset standard of the digital demodulation to DECT.

```
:SENSe:DDEMod:STANdard:PRESet DECT
```

[:SENSe]:DDEMod:SWEEp:POINts**Syntax**

```
[ :SENSe ]:DDEMod:SWEEp:POINts <integer>
```

```
[ :SENSe ]:DDEMod:SWEEp:POINts?
```

Description

Sets the number of symbols in digital demodulation.

Queries the number of symbols in digital demodulation.

Parameter

Name	Type	Range	Default
<integer>	Integer	Refer to " Remarks "	50

Remarks

The minimum capture length is 10.

The maximum capture length MImax is determined by points/symbol. When setting points/symbol to 4, MImax is 4096; when setting points/symbol to 8, MImax is 2048.

Return Format

The query returns the number of symbols in integer.

Example

The following command sets the number of symbols to 200.

```
:SENSe:DDEMod:SWEEp:POINts 200
```

The following query returns 200.

```
:SENSe:DDEMod:SWEEp:POINts?
```

[[:SENSe]:DDEMod:SYNC:ALENgtH**Syntax**

```
[[:SENSe]:DDEMod:SYNC:ALENgtH <interger>
```

```
[[:SENSe]:DDEMod:SYNC:ALENgtH?
```

Description

Sets the sync analyze length.

Queries the sync analyze length.

Parameter

Name	Type	Range	Default
<interger>	Integer	50 to 4096	50

Remarks

This command is valide only when the sync search function is enabled and the burst search is disabled.

Return Format

The query returns the sync analyze length in integer.

Example

The following command sets the sync analyze length to 50.

```
:SENSe:DDEMod:SYNC:ALENgtH 50
```

The following query returns 50.

```
:SENSe:DDEMod:SYNC:ALENgtH?
```

[[:SENSe]:DDEMod:SYNC:BURSt:RUNIn**Syntax**

```
[[:SENSe]:DDEMod:SYNC:BURSt:RUNIn <interger>
```

```
[[:SENSe]:DDEMod:SYNC:BURSt:RUNIn?
```

Description

Sets the burst search run-in.

Queries the burst search run-in.

Parameter

Name	Type	Range	Default
<integer>	Integer	0 to 16384	0

Remarks

This command is valid only when the burst search function is enabled.

Return Format

The query returns the burst search run-in in integer.

Example

The following command sets the burst search run-in to 50.

```
:SENSe:DEMod:SYNC:BURSt:RUNIn 50
```

The following query returns 50.

```
:SENSe:DEMod:SYNC:BURSt:RUNIn?
```

[[:SENSe]:DEMod:SYNC:BURSt:STATe**Syntax**

```
[[:SENSe]:DEMod:SYNC:BURSt:STATe OFF|ON|0|1
```

```
[[:SENSe]:DEMod:SYNC:BURSt:STATe?
```

Description

Enables or disables the burst search.

Queries the setting status of the burst search.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command enables the burst search.

```
:SENSe:DEMod:SYNC:BURSt:STATe ON or :SENSe:DEMod:SYNC:BURSt:STATe 1
```

The following query returns 1.

```
:SENSe:DEMod:SYNC:BURSt:STATe?
```

[[:SENSe]:DEMod:SYNC:SLENgth**Syntax**

```
[[:SENSe]:DEMod:SYNC:SLENgth <time>
```

```
[[:SENSe]:DEMod:SYNC:SLENgth?
```

Description

Sets the burst search length.

Queries the burst search length.

Parameter

Name	Type	Range	Default
<time>	Consecutive Real Number	50 us to 16.3840 ms	50 us

Return Format

The query returns the burst search length in scientific notation.

Example

The following command sets the burst search length to 200 μ s.

```
:SENSe:DDEMod:SYNC:SENGth 0.0002
```

The following query returns 2.000000000e-04.

```
:SENSe:DDEMod:SYNC:SENGth?
```

[[:SENSe]:DDEMod:SYNC:SWORd:OFFSet**Syntax**

```
[[:SENSe]:DDEMod:SYNC:SWORd:OFFSet <integer>
```

```
[[:SENSe]:DDEMod:SYNC:SWORd:OFFSet?
```

Description

Sets the sync offset of the sync search.

Queries the sync offset of the sync search.

Parameter

Name	Type	Range	Default
<integer>	Consecutive Real Number	-2048 to 2048	0

Return Format

The query returns the sync offset in integer.

Example

The following command sets the sync offset to -3.

```
:SENSe:DDEMod:SYNC:SWORd:OFFSet -3
```

The following query returns -3.

```
:SENSe:DDEMod:SYNC:SWORd:OFFSet?
```

[[:SENSe]:DDEMod:SYNC:SWORd:PATtern**Syntax**

```
[[:SENSe]:DDEMod:SYNC:SWORd:PATtern <string>
```

```
[[:SENSe]:DDEMod:SYNC:SWORd:PATtern?
```

Description

Sets the bit pattern for the sync search.

Queries the bit pattern for the sync search.

Parameter

Name	Type	Range	Default
<string>	Consecutive Real Number	0 to 32 symbols	--

Return Format

The query returns the bit pattern for the sync search in strings.

Example

The following command sets the bit pattern for the sync search to 1011010.

```
:SENSe:DDEMod:SYNC:SWORd:PATtern 1011010
```

The following query returns 1011010.

```
:SENSe:DDEMod:SYNC:SWORd:PATtern?
```

[[:SENSe]:DDEMod:SYNC:SWORd:STATe**Syntax**

```
[[:SENSe]:DDEMod:SYNC:SWORd:STATe OFF|ON|0|1
```

```
[[:SENSe]:DDEMod:SYNC:SWORd:STATe?
```

Description

Enables or disables the sync word search.

Queries the setting status of the sync word search.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 0 or 1.

Example

The following command enables the sync word search.

```
:SENSe:DDEMod:SYNC:SWORd:STATe ON or :SENSe:DDEMod:SYNC:SWORd:STATe 1
```

The following query returns 1.

```
:SENSe:DDEMod:SYNC:SWORd:STATe?
```

[[:SENSe]:FREQuency:CENTer**Syntax**

```
[[:SENSe]:FREQuency:CENTer <freq>
```

```
[[:SENSe]:FREQuency:CENTer?
```

Description

Sets the center frequency.

Queries the center frequency.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	1.562 kHz to (Fmax ^[1] – 1.562 kHz)	1 GHz

Note^[1]: The maximum measurement frequency Fmax is determined by the instrument model. For RSA3030E, Fmax is 3 GHz; for RSA3015E, Fmax is 1.5 GHz.

Return Format

The query returns the center frequency in scientific notation. The unit is Hz.

Example

The following command sets the center frequency to 2 MHz.

```
:SENSe:FREQuency:CENTer 2000000
```

The following query returns 2.000000000e+06.

```
:SENSe:FREQuency:CENTer?
```

[:SENSe]:FREQuency:CENTer:STEP:AUTO**Syntax**

```
[ :SENSe ]:FREQuency:CENTer:STEP:AUTO OFF|ON|0|1
```

```
[ :SENSe ]:FREQuency:CENTer:STEP:AUTO?
```

Description

Enables or disables the auto setting mode of the CF step.

Queries the status of the auto setting mode of the CF step.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	ON 1

Return Format

The query returns 0 or 1.

Example

The following command enables the auto setting mode of the CF step.

```
:SENSe:FREQuency:CENTer:STEP:AUTO ON or :SENSe:FREQuency:CENTer:STEP:AUTO 1
```

The following query returns 1.

```
:SENSe:FREQuency:CENTer:STEP:AUTO?
```

[:SENSe]:FREQuency:CENTer:STEP[:INCRement]**Syntax**

```
[ :SENSe ]:FREQuency:CENTer:STEP[:INCRement] <freq>
```

```
[ :SENSe ]:FREQuency:CENTer:STEP[:INCRement]?
```

Description

Sets the CF step.

Queries the CF step.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	-Fmax to Fmax	Span/10

Return Format

The query returns the center frequency step in scientific notation. The unit is Hz.

Example

The following command sets the CF step to 100 kHz.

```
:SENSe:FREQuency:CENTer:STEP:INCRement 100000
```

The following query returns 1.000000000e+05.
:SENSe:FREQuency:CENTer:STEP:INCRement?

[[:SENSe]:FREQuency:SPAN?

Syntax

[[:SENSe]:FREQuency:SPAN?

Description

Queries the frequency span of the current channel.

Return Format

The query returns the span in scientific notation. The unit is Hz.

Example

The following query returns 3.125000000e+06.
:SENSe:FREQuency:SPAN?

[[:SENSe]:FREQuency:START

Syntax

[[:SENSe]:FREQuency:START <freq>
[[:SENSe]:FREQuency:START?

Description

Sets the start frequency.

Queries the start frequency.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	0 Hz to (Fmax – 3.125 kHz)	center frequency - span/2

Return Format

The query returns the start frequency in scientific notation. The unit is Hz.

Example

The following command sets the start frequency to 100 MHz.

:SENSe:FREQuency:START 100000000

The following query returns 1.000000000e+08.

:SENSe:FREQuency:START?

[[:SENSe]:FREQuency:STOP

Syntax

```
[[:SENSe]:FREQuency:STOP <freq>
[:SENSe]:FREQuency:STOP?
```

Description

Sets the stop frequency.
Queries the stop frequency.

Parameter

Name	Type	Range	Default
<freq>	Consecutive Real Number	3.125 kHz to Fmax	center frequency + span/2

Return Format

The query returns the stop frequency in scientific notation. The unit is Hz.

Example

The following command sets the stop frequency to 10 MHz.

```
:SENSe:FREQuency:STOP 10000000
```

The following query returns 1.000000000e+07.

```
:SENSe:FREQuency:STOP?
```

[[:SENSe]:POWer[:RF]:RANGe

Syntax

```
[[:SENSe]:POWer[:RF]:RANGe <real>
[:SENSe]:POWer[:RF]:RANGe?
```

Description

Sets the amplitude of the largest sinusoidal input signal without being clipped by the IF ADC.
Queries the amplitude of the largest sinusoidal input signal without being clipped by the IF ADC.

Parameter

Name	Type	Range	Default
<real>	Integer	-15 dBm to 25 dBm	20 dBm

Return Format

The query returns the signal amplitude in scientific notation. The unit is dBm.

Example

The following command sets the amplitude of the largest sinusoidal input signal without being clipped by the IF ADC to 20 dBm.

```
:SENSe:POWer:RF:RANGe 20
```

The following query returns 2.000000000e+01.

```
:SENSe:POWer:RF:RANGe?
```

:STATus Commands

For the details about the :STATus commands, refer to 2-182.

:SYSTem Commands

For the details about the :SYSTem commands, refer to 2-186.

:TRACe Command

Command List:

- ◆ :TRACe<n>[:DATA]?

:TRACe<n>[:DATA]?

Syntax

```
:TRACe<n>[:DATA]?
```

Description

Description
Queries the data of the specified trace.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2 3 4	--

Remarks

The format of the user data is set by the `:FORMat[:TRACe][:DATA]` command.

Return Format

The query returns the data of the specified trace. The format of the returned data is determined by the settings of the `:FORMat[:TRACe][:DATA]` command.

Example^[1]

1. When the data format is ASCII,

The following query returns data of Trace 1, that is, -1.390530e+01, -7.108871e+01, -7.089631e+01, -6.992984e+01, -7.010770e+01,

```
:TRACe1:DATA?
```

2. When the data format is REAL[,32],

[illegible]

Note: The PC software converts the returned binary data to ASCII format. Therefore, if you use the PC software to perform the query command, the returned value is displayed as a messy code.

Note^[1]: The two examples in this page take sending 801 points as an example, and the query returns 801 points. Due to the limited space, the subsequent data are omitted. In addition, the returned values of the above examples are obtained when the system stops sweeping the trace.

:TRIGger Commands

Command List:

- ◆ [:TRIGger\[:SEquence\]:ATRigger](#)
- ◆ [:TRIGger\[:SEquence\]:ATRigger:STATe](#)
- ◆ [:TRIGger\[:SEquence\]:EXTeRnal<n>:DELaY](#)
- ◆ [:TRIGger\[:SEquence\]:EXTeRnal<n>:DELaY:STATe](#)
- ◆ [:TRIGger\[:SEquence\]:EXTeRnal<n>:SLOPe](#)
- ◆ [:TRIGger\[:SEquence\]:FMT:CRITeria](#)
- ◆ [:TRIGger\[:SEquence\]:FMT:DELaY](#)
- ◆ [:TRIGger\[:SEquence\]:FMT:DELaY:STATe](#)
- ◆ [:TRIGger\[:SEquence\]:FMT:MASK](#)
- ◆ [:TRIGger\[:SEquence\]:FMT:MASK:EDIT](#)
- ◆ [:TRIGger\[:SEquence\]:FMT:MASK:RELative:AMPLitude](#)
- ◆ [:TRIGger\[:SEquence\]:FMT:MASK:RELative:FREQuency](#)
- ◆ [:TRIGger\[:SEquence\]:FMT:MASK<n>:BUIld](#)
- ◆ [:TRIGger\[:SEquence\]:FMT:MASK<n>:DATA](#)
- ◆ [:TRIGger\[:SEquence\]:FMT:MASK<n>:DELeTe](#)
- ◆ [:TRIGger\[:SEquence\]:FMT:MASK<n>:NAME](#)
- ◆ [:TRIGger\[:SEquence\]:FMT:MASK<n>:NEW](#)
- ◆ [:TRIGger\[:SEquence\]:HOLDoff](#)
- ◆ [:TRIGger\[:SEquence\]:HOLDoff:STATe](#)
- ◆ [:TRIGger\[:SEquence\]:LEVel](#)
- ◆ [:TRIGger\[:SEquence\]:SOURce](#)
- ◆ [:TRIGger2:MODE](#)

:TRIGger[:SEquence]:ATRigger

Syntax

```
:TRIGger[:SEquence]:ATRigger <time>
:TRIGger[:SEquence]:ATRigger?
```

Description

Sets the auto trigger time.
Queries the auto trigger time.

Parameter

Name	Type	Range	Default
<time>	Consecutive Real Number	1 ms to 100 s	100 ms

Remarks

This command is only valid when the auto triggering function is enabled.

Return Format

The query returns the time value in scientific notation. The unit is s.

Example

The following command sets the time to 10 ms.

```
:TRIGger:SEQuence:ATRIgger 0.01
```

The following query returns 1.000000000e-02.

```
:TRIGger:SEQuence:ATRIgger?
```

:TRIGger[:SEQuence]:ATRIgger:STATe**Syntax**

```
:TRIGger[:SEQuence]:ATRIgger:STATe OFF|ON|0|1
```

```
:TRIGger[:SEQuence]:ATRIgger:STATe?
```

Description

Enables or disables the auto trigger function.

Queries the setting status of auto trigger function.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 1 or 0.

Example

The following command enables the auto trigger function.

```
:TRIGger:SEQuence:ATRIgger:STATe ON or :TRIGger:SEQuence:ATRIgger:STATe 1
```

The following query returns 1.

```
:TRIGger:SEQuence:ATRIgger:STATe?
```

:TRIGger[:SEQuence]:EXTErnal<n>:DELaY**Syntax**

```
:TRIGger[:SEQuence]:EXTErnal<n>:DELaY <time>
```

```
:TRIGger[:SEQuence]:EXTErnal<n>:DELaY?
```

Description

Sets the delay time for the external trigger.

Queries the delay time for the external trigger.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2	--
<time>	Consecutive Real Number	0 μ s to 500 ms	1 μ s

Remarks

When the parameter n is set to 1, it indicates External Trigger 1; when set to 2, it indicates External Trigger 2.

This command is only valid when the external trigger delay function is enabled.

Return Format

The query returns the delay time for the external trigger in scientific notation. The unit is s.

Example

The following command sets the delay time for External Trigger 1 to 100 ms.

```
:TRIGger:SEquence:EXternal1:DElay 0.1
```

The following query returns 1.000000000e-01.

```
:TRIGger:SEquence:EXternal1:DElay?
```

:TRIGger[:SEquence]:EXternal<n>:DElay:STATe

Syntax

```
:TRIGger[:SEquence]:EXternal<n>:DElay:STATe OFF|ON|0|1
```

```
:TRIGger[:SEquence]:EXternal<n>:DElay:STATe?
```

Description

Enables or disables the external trigger delay function.

Queries the status of the external trigger delay function.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2	--
--	Bool	OFF ON 0 1	OFF 0

Remarks

When the parameter n is set to 1, it indicates External Trigger 1; when set to 2, it indicates External Trigger 2.

Return Format

The query returns 1 or 0.

Example

The following command enables the delay function of External Trigger 1.

```
:TRIGger:SEquence:EXternal1:DElay:STATe ON or :TRIGger:SEquence:EXternal1:DElay:STATe 1
```

The following query returns 1.

```
:TRIGger:SEquence:EXternal1:DElay:STATe?
```

:TRIGger[:SEquence]:EXternal<n>:SLOPe

Syntax

```
:TRIGger:SEquence:EXternal<n>:SLOPe POSitive|NEGative
```

```
:TRIGger:SEquence:EXternal<n>:SLOPe?
```

Description

Sets the trigger edge for the external trigger.

Queries the trigger edge for the external trigger.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2	--
--	Keyword	POSitive NEGative	POSitive

Remarks

When the parameter n is set to 1, it indicates External Trigger 1; when set to 2, it indicates External Trigger 2.

POSitive: indicates the rising edge.

NEGative: indicates the falling edge.

Return Format

The query returns POS or NEG.

Example

The following command sets the trigger edge of External Trigger 1 to POSitive.

```
:TRIGger:SEquence:EXternal1:SLOPe POSitive
```

The following query returns POS.

```
:TRIGger:SEquence:EXternal1:SLOPe?
```

:TRIGger[:SEquence]:FMT:CRITeria**Syntax**

```
:TRIGger[:SEquence]:FMT:CRITeria ENTER|LEAVE|INSide|OUTSide|ELEave|LENTer
```

```
:TRIGger[:SEquence]:FMT:CRITeria?
```

Description

Sets the trigger criteria for FMT.

Queries the trigger criteria for FMT.

Parameter

Name	Type	Range	Default
—	Keyword	ENTER LEAVE INSide OUTSide ELEave LENTer	ENTER

Remarks

This command is only valid when you select FMT to be the trigger source.

Return Format

The query returns ENT, LEAV, INS, OUTS, ELE, or LENT.

Example

The following command sets the trigger criteria for FMT to Enter.

```
:TRIGger:SEquence:FMT:CRITeria ENTER
```

The following query returns ENT.

```
:TRIGger:SEquence:FMT:CRITeria?
```

:TRIGger[:SEquence]:FMT:DELay**Syntax**

```
:TRIGger[:SEquence]:FMT:DELay <time>
```

```
:TRIGger[:SEquence]:FMT:DELay?
```

Description

Sets the delay time for FMT.

Queries the delay time for FMT.

Parameter

Name	Type	Range	Default
<time>	Consecutive Real Number	0 us to 500 ms	1 μ s

Remarks

When "Inside" or "Outside" is selected to be the trigger criteria, the FMT trigger delay command is invalid.

This command is only valid when the following conditions are met: FMT is selected to be the trigger source; FMT trigger delay function is enabled.

Return Format

The query returns the delay time for FMT in scientific notation. The unit is s.

Example

The following command sets the delay time for FMT to 100 ms.

```
:TRIGger:SEquence:FMT:DElay 0.1
```

The following query returns 1.000000000e-01.

```
:TRIGger:SEquence:FMT:DElay?
```

:TRIGger[:SEquence]:FMT:DElay:STATe**Syntax**

```
:TRIGger[:SEquence]:FMT:DElay:STATe OFF|ON|0|1
```

```
:TRIGger[:SEquence]:FMT:DElay:STATe?
```

Description

Enables or disables the FMT trigger delay function.

Queries the status of the FMT trigger delay function.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

This command is only valid when you select FMT to be the trigger source.

Return Format

The query returns 1 or 0.

Example

The following command enables the FMT trigger delay function.

```
:TRIGger:SEquence:FMT:DElay:STATe ON or :TRIGger:SEquence:FMT:DElay:STATe 1
```

The following query returns 1.

```
:TRIGger:SEquence:FMT:DElay:STATe?
```

:TRIGger[:SEQuence]:FMT:MASK

Syntax

```
:TRIGger[:SEQuence]:FMT:MASK UPPer|LOWer|BOTH
:TRIGger[:SEQuence]:FMT:MASK?
```

Description

Sets the mask to be used for the current trigger.
Queries the mask to be used for the current trigger.

Parameter

Name	Type	Range	Default
—	Keyword	UPPer LOWer BOTH	UPPer

Remarks

This command is only valid when you select FMT to be the trigger source.

Return Format

The query returns UPP, LOW, or BOTH.

Example

The following command sets the mask to be used for the current trigger to Upper.
:TRIGger:SEQuence:FMT:MASK UPPer

The following query returns UPP.
:TRIGger:SEQuence:FMT:MASK?

:TRIGger[:SEQuence]:FMT:MASK:EDIT

Syntax

```
:TRIGger[:SEQuence]:FMT:MASK:EDIT UPPer|LOWer
:TRIGger[:SEQuence]:FMT:MASK:EDIT?
```

Description

Sets the mask type that is currently viewed/edited.
Queries the mask type that is currently viewed/edited.

Parameter

Name	Type	Range	Default
—	Keyword	UPPer LOWer	UPPer

Remarks

This command is only valid when you select FMT to be the trigger source.

Return Format

The query returns UPP or LOW.

Example

The following command sets the mask that is currently viewed/edited to Upper.
:TRIGger:SEQuence:FMT:MASK:EDIT UPPer

The following query returns UPP.
:TRIGger:SEQuence:FMT:MASK:EDIT?

:TRIGger[:SEquence]:FMT:MASK:RELative:AMPLitude

Syntax

```
:TRIGger[:SEquence]:FMT:MASK:RELative:AMPLitude OFF|ON|0|1
:TRIGger[:SEquence]:FMT:MASK:RELative:AMPLitude?
```

Description

Sets whether the amplitudes of the mask points are coupled to the reference level of the instrument. Queries whether the amplitudes of the mask points are coupled to the reference level of the instrument.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

OFF|0: disables the coupling function. That is, when "Fixed" is selected under **Y Axis Type**, the amplitude of the current mask point will not be affected by the reference level.
 ON|1: enables the coupling function. That is, when "Relative" is selected under **Y Axis Type**, the amplitude of the current mask point is the difference between the point and the current reference level.
 If you modify the state of this parameter after the mask has been set, the amplitude of the mask should make corresponding changes based on the state of the parameter, so as to keep the relations between the mask and the reference level of the instrument unchanged.
 When on, the amplitude of the mask point is expressed as an offset from the reference level.
 This command is only valid when you select FMT to be the trigger source.

Return Format

The query returns 1 or 0.

Example

The following command enables the coupling relationship between the amplitudes of the mask points and the instrument's reference level.

```
:TRIGger:SEquence:FMT:MASK:RELative:AMPLitude ON
or :TRIGger:SEquence:FMT:MASK:RELative:AMPLitude 1
```

The following query returns 1.

```
:TRIGger:SEquence:FMT:MASK:RELative:AMPLitude?
```

:TRIGger[:SEquence]:FMT:MASK:RELative:FREQuency

Syntax

```
:TRIGger[:SEquence]:FMT:MASK:RELative:FREQuency OFF|ON|0|1
:TRIGger[:SEquence]:FMT:MASK:RELative:FREQuency?
```

Description

Sets whether the frequencies of the mask points are coupled to the center frequency of the instrument. Queries whether the frequencies of the mask points are coupled to the center frequency of the instrument.

Parameter

Name	Type	Range	Default
—	Bool	OFF ON 0 1	OFF 0

Remarks

OFF|0: disables the coupling function. That is, when "Fixed" is selected under **X Axis Type**, the frequency of the current mask point will not be affected by the center frequency.

ON|1: enables the coupling function. That is, when "Relative" is selected under **X Axis Type**, the frequency of the current mask point is the difference between the point and the current center frequency. If you modify the state of this parameter after the mask has been set, the frequency of the mask should make corresponding changes based on the state of the parameter, so as to keep the relations between the mask and the center frequency of the instrument unchanged.

When on, the frequencies of the mask points are expressed as an offset from the center frequency. At this time, the frequencies of the mask points can be negative values.

This command is only valid when you select FMT to be the trigger source.

Return Format

The query returns 1 or 0.

Example

The following command enables the coupling relationship between the frequencies of the mask points and the instrument's center frequency.

```
:TRIGger:SEquence:FMT:MASK:RELative:FREQuency ON
or :TRIGger:SEquence:FMT:MASK:RELative:FREQuency 1
```

The following query returns 1.

```
:TRIGger:SEquence:FMT:MASK:RELative:FREQuency?
```

:TRIGger[:SEquence]:FMT:MASK<n>:BUILd

Syntax

```
:TRIGger[:SEquence]:FMT:MASK<n>:BUILd
```

Description

Creates a mask according the RT trace data.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2	--

Remarks

When <n> is set to 1, it indicates that the upper mask is being edited; when it is set to 2, it indicates that the lower mask is being edited.

This command is only valid when you select FMT to be the trigger source.

Example

The following command creates a upper mask.

```
:TRIGger:SEquence:FMT:MASK1:BUILd
```

:TRIGger[:SEquence]:FMT:MASK<n>:DATA

Syntax

```
:TRIGger[:SEquence]:FMT:MASK<n>:DATA <freq>,<ampl>{,<freq>,<ampl>}
:TRIGger[:SEquence]:FMT:MASK<n>:DATA?
```

Description

Edits the mask parameters.

Queries the mask parameters.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2	—
<freq>	Consecutive Real Number	0 Hz to 3 GHz	
<ampl>	Consecutive Real Number	-1,000 dBm to 1,000 dBm	

Remarks

When <n> is set to 1, it indicates that the upper mask is being edited; when it is set to 2, it indicates that the lower mask is being edited.

This command is only valid when you select FMT to be the trigger source.

Return Format

The query returns the mask parameters that are being edited currently in scientific notation.

Example

The following command edits the two points of the upper mask.

```
:TRIGger:SEquence:FMT:MASK1:DATA -80000000, -50, 80000000, -50
```

The following query returns -8.000000e+07, -5.000000e+01, 8.000000e+07, -5.000000e+01

```
:TRIGger:SEquence:FMT:MASK1:DATA?
```

:TRIGger[:SEquence]:FMT:MASK<n>:DElete**Syntax**

```
:TRIGger[:SEquence]:FMT:MASK<n>:DElete
```

Description

Deletes the specified mask.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2	—

Remarks

When <n> is set to 1, edit the upper mask; when set to 2, edit the lower mask.

This command is only valid when you select FMT to be the trigger source.

:TRIGger[:SEquence]:FMT:MASK<n>:NAME**Syntax**

```
:TRIGger[:SEquence]:FMT:MASK<n>:NAME <string>
```

```
:TRIGger[:SEquence]:FMT:MASK<n>:NAME?
```

Description

Saves the FMT file with a specified filename suffixed with ".csv" to the default path ("/mode name"/mask).

Queries the currently saved FMT filename.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2	—
<string>	ASCII String	—	—

Remarks

If the specified file already exists, overwrite it.

When <n> is set to 1, edit the upper mask; when set to 2, edit the lower mask.

Example

The following command saves the upper mask FMT file with the filename (mask1.csv) to the "/vsa/mask" folder.

```
:TRIGger:SEQuence:FMT:MASK1:NAME mask1
```

The following query returns mask1.

```
:TRIGger:SEQuence:FMT:MASK1:NAME?
```

:TRIGger[:SEQuence]:FMT:MASK<n>:NEW**Syntax**

```
:TRIGger[:SEQuence]:FMT:MASK<n>:NEW
```

Description

Clears the currently activated mask and creates a default new mask.

Parameter

Name	Type	Range	Default
<n>	Discrete	1 2	—

Remarks

When <n> is set to 1, it indicates that the upper mask is being edited; when it is set to 2, it indicates that the lower mask is being edited.

This command is only valid when you select FMT to be the trigger source.

:TRIGger[:SEQuence]:HOLDoff**Syntax**

```
:TRIGger[:SEQuence]:HOLDoff <time>
```

```
:TRIGger[:SEQuence]:HOLDoff?
```

Description

Sets the trigger holdoff time.

Queries the trigger holdoff time.

Parameter

Name	Type	Range	Default
<time>	Consecutive Real Number	100 μ s to 500 ms	100 ms

Remarks

This command is only valid when the trigger holdoff function is enabled.

Return Format

The query returns the trigger holdoff time in scientific notation. The unit is s.

Example

The following command sets the sync holdoff time to 100 ms.

```
:TRIGger:SEQuence:HOLDoff 0.1
```

The following query returns 1.000000000e-01.

```
:TRIGger:SEQuence:HOLDoff?
```

:TRIGger[:SEQuence]:HOLDoff:STATe

Syntax

:TRIGger[:SEQuence]:HOLDoff:STATe OFF|ON|0|1
:TRIGger[:SEQuence]:HOLDoff:STATe?

Description

Turns on or off the trigger holdoff function.
Queries the status of the trigger holdoff function.

Parameter

Name	Type	Range	Default
--	Bool	OFF ON 0 1	OFF 0

Return Format

The query returns 1 or 0.

Example

The following command enables the trigger holdoff function.

:TRIGger:SEQuence:HOLDoff:STATe ON or :TRIGger:SEQuence:HOLDoff:STATe 1

The following query returns 1.

:TRIGger:SEQuence:HOLDoff:STATe?

:TRIGger[:SEQuence]:LEVel

Syntax

:TRIGger[:SEQuence]:LEVel <ampl>
:TRIGger[:SEQuence]:LEVel?

Description

Sets the trigger level of the IF power trigger.
Queries the trigger level of the IF power trigger.

Parameter

Name	Type	Range	Default
<ampl>	Consecutive Real Number	-140 dBm to 30 dBm	0 dBm

Remarks

This command is only valid when IF power trigger is selected.

Return Format

The query returns the trigger level in scientific notation.

Example

The following command sets the trigger level of IF power to 10 dBm.

:TRIGger:SEQuence:LEVel 10

The following query returns 1.000000e+01.

:TRIGger:SEQuence:LEVel?

:TRIGger[:SEQuence]:SOURce

Syntax

:TRIGger[:SEQuence]:SOURce EXTernal1|EXTernal2|IMMEDIATE|FMT|POWER
:TRIGger[:SEQuence]:SOURce?

Description

Sets the trigger source.

Queries the trigger source.

Parameter

Name	Type	Range	Default
--	Keyword	EXTernal1 EXTernal2 IMMEDIATE FMT POWER	IMMEDIATE

Remarks

EXTernal1: indicates External Trigger 1.

EXTernal2: indicates External Trigger 2.

IMMEDIATE: indicates the free-run trigger.

FMT: indicates the frequency mask trigger.

POWER: indicates IF Power Trigger.

Return Format

The query returns EXT1, EXT2, IMM, FMT, or POW.

Example

The following command sets the trigger source to free-run trigger.

```
:TRIGger:SEQuence:SOURce IMMEDIATE
```

The following query returns IMM.

```
:TRIGger:SEQuence:SOURce?
```

:TRIGger2:MODE

Syntax

:TRIGger2:MODE IN|OUT|0|1
:TRIGger2:MODE?

Description

Sets the interface type of External Trigger 2.

Queries the interface type of External Trigger 2.

Parameter

Name	Type	Range	Default
--	Keyword	IN OUT 0 1	IN 0

Remarks

IN|0: indicates the input interface.

OUT|1: indicates the output interface.

Return Format

The query returns 0 or 1.

Example

The following command sets External Trigger 2 to be the input interface.

:TRIGger2:MODE IN

The following query returns 0.

:TRIGger2:MODE?

Chapter 5 Programming Examples

This chapter lists some programming examples to illustrate how to use commands to realize the common functions of the spectrum analyzer in the development environments such as Visual C++ 6.0, Visual Basic 6.0, and LabVIEW 2010. Also, the chapter lists some examples to illustrate how to control the spectrum analyzer to realize the common functions in Linux operating system. These examples are programmed based on NI-VISA library.

NI-VISA (National Instrument-Virtual Instrument Software Architecture), developed by NI (National Instrument), provides an advanced programming interface to communicate with various instruments through their bus lines. NI-VISA enables you to realize the communication between the analyzer and PC through instrument buses (such as USB). VISA defines a set of software commands with which users can control the instrument without the need to understand how the interface bus works. For details, please refer to the NI-VISA Help.

Contents in this chapter:

- ◆ [Programming Instructions](#)
- ◆ [Programming Preparations](#)
- ◆ [Visual C++ 6.0 Programming Example](#)
- ◆ [Visual Basic 6.0 Programming Example](#)
- ◆ [LabVIEW 2010 Programming Example](#)
- ◆ [Linux Programming Example](#)

Programming Instructions

This section introduces the problems that might occur during the programming process as well as their solutions. If these problems occur, please resolve them according to the corresponding instructions.

1. When you build a working environment via the network, it is recommended that you build a pure local area network.
2. If the local area network environment is complicated (e.g. many devices and broadcast messages exist), it is recommended that you add some fault tolerance during the programming process. For the details, refer to the "InstrWriteEx()" and "InstrReadEx()" for instrument write/read operations with exception handling functions in "[Visual C++ 6.0 Programming Example](#)".
3. The socket programming port No. of this device is 5555.

Programming Preparations

The programming preparations introduced here are only applicable to programming by using Visual C++ 6.0, Visual Basic 6.0, and LabVIEW 2010 development tools in Windows operating system. For the preparations of programming in Linux operating system, refer to "[Programming Preparations](#)" in "[Linux Programming Example](#)".

First, check whether your PC has installed NI's VISA library. If not, download it from <http://www.ni.com/visa/>. In this manual, the default installation path is C:\Program Files\IVI Foundation\VISA.

Connect spectrum analyzer to the PC via the USB interface of the analyzer. Use the USB cable to connect the analyzer to the PC via the USB DEVICE interface on the rear panel of the analyzer.


After the analyzer is connected to the PC properly, start the analyzer. In this case, "Found New Hardware Wizard" dialog box appears on the PC. Please install "USB Test and Measurement Device (IVI)" according to the wizard.

By now, the programming preparations are complete. The following parts will make a detailed introduction about the programming instances in the Visual C++ 6.0, Visual Basic 6.0, and LabVIEW 2010 development environment.

Visual C++ 6.0 Programming Example


Enter the Visual C++6.0 programming environment, and perform the following procedures.

1. Create a MFC project based on a dialog box and name it "DemoForRSA" in this example.
2. Click **Project** → **Settings** to open the "Project Setting" dialog box. In the dialog box, click the **Link** tab, add "visa32.lib" under **Object/library modules**, then click **OK** to close the dialog box.

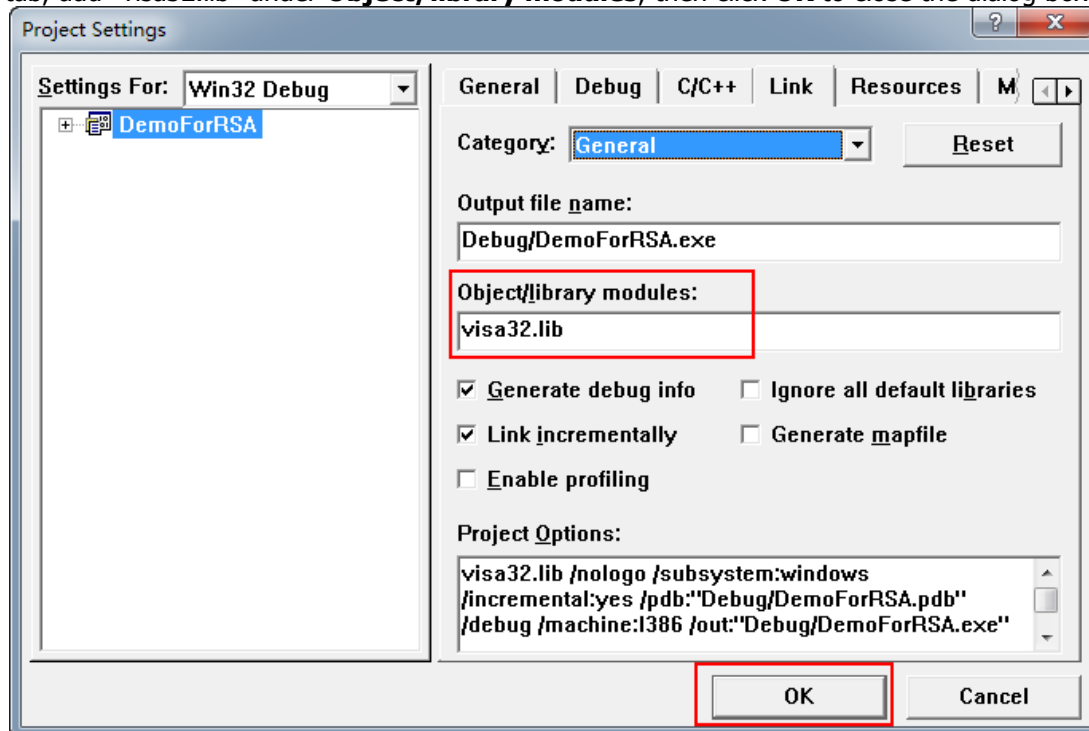


3. Click **Tools** → **Options** to open the "Options" dialog box. Then, click the **Directories** tab. Select **Include files** from the drop-down list under **Show directories for**. Double click the empty space under **Directories** to enter the specified path of Include files: C:\Program Files\IVI Foundation\VISA\WinNT\include. Click **OK** to close the dialog box. Select **Library files** from the drop-down list under **Show directories for**. Double click the empty space under **Directories** to enter the specified path of Library files: C:\Program Files\IVI Foundation\VISA\WinNT\lib\msc. Click **OK** to close the dialog box.

Note: The two paths added here are related to the installation path of NI-VISA on your PC. By default, NI-VISA is installed under C:\Program Files\IVI Foundation\VISA.

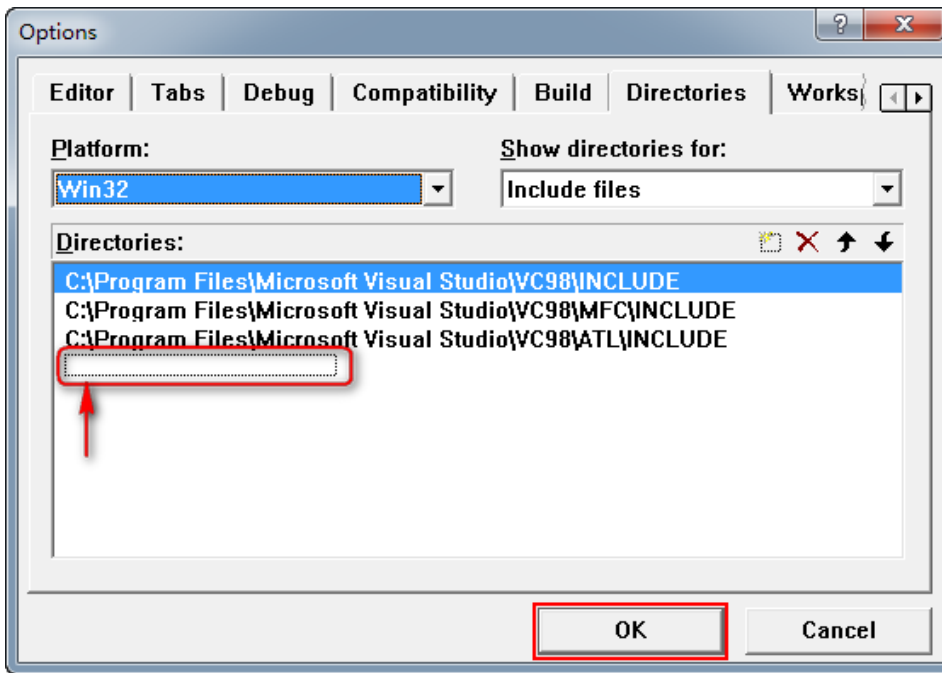

By now, VISA library has been added.

4. Add the Text, Edit, and Button controls, as shown in the figure below.

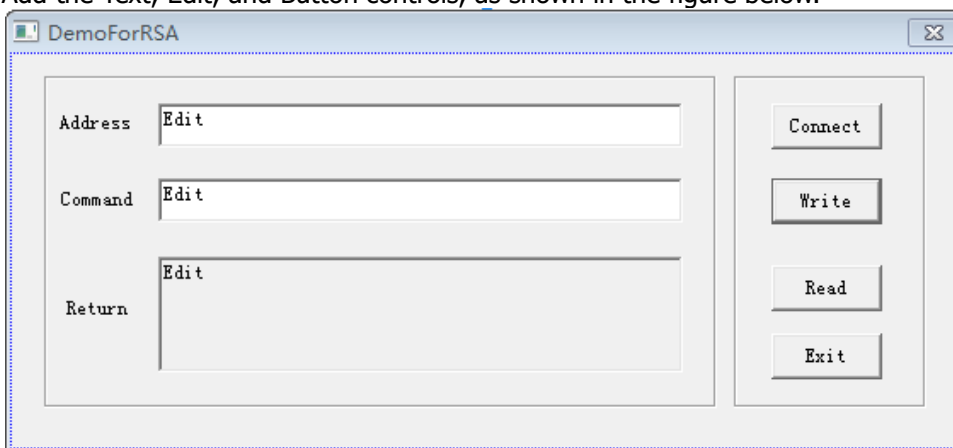

5. Add the control variables.
Click **View** → **ClassWizard**, and then click the **Member Variables** tab to add the following three variables:
Address CString m_strInstrAddr
Command CString m_strCommand
Return CString m_strResult

6. Encapsulate the read and write operations of VISA.

- 1) Encapsulate the write operation of VISA for easier operation.

```
bool CDemoForRSADlg::InstrWrite(CString strAddr, CString strContent) //Write operation
{
    ViSession defaultRM,instr;
    ViStatus status;
    ViUInt32 retCount;
    char * SendBuf = NULL;
    char * SendAddr = NULL;
    bool bWriteOK = false;
    CString str;
```

```

// Change the address's data style from CString to char*
SendAddr = strAddr.GetBuffer(strAddr.GetLength());
strcpy(SendAddr,strAddr);
strAddr.ReleaseBuffer();

// Change the command's data style from CString to char*
SendBuf = strContent.GetBuffer(strContent.GetLength());
strcpy(SendBuf,strContent);
strContent.ReleaseBuffer();

//Open a VISA resource
status = viOpenDefaultRM(&defaultRM);
if (status < VI_SUCCESS)
{
    AfxMessageBox("No VISA resource was opened!");
    return false;
}

status = viOpen(defaultRM, SendAddr, VI_NULL, VI_NULL, &instr);

//Write command to the instrument
status = viWrite(instr, (unsigned char *)SendBuf, strlen(SendBuf), &retCount);

//Close the system
status = viClose(instr);
status = viClose(defaultRM);

return bWriteOK;
}

```

- 2) Encapsulate the read operation of VISA for easier operation.

```

bool CDemoForRSADlg::InstrRead(CString strAddr, CString *pstrResult) //Read operation
{
    ViSession defaultRM,instr;
    ViStatus status;
    ViUInt32 retCount;
    char * SendAddr = NULL;
    unsigned char RecBuf[MAX_REC_SIZE];
    bool bReadOK = false;
    CString str;

    // Change the address's data style from CString to char*
    SendAddr = strAddr.GetBuffer(strAddr.GetLength());
    strcpy(SendAddr,strAddr);
    strAddr.ReleaseBuffer();

    memset(RecBuf,0,MAX_REC_SIZE);

    //Open a VISA resource
    status = viOpenDefaultRM(&defaultRM);
    if (status < VI_SUCCESS)
    {
        // Error Initializing VISA...exiting
        AfxMessageBox("No VISA resource was opened!");
        return false;
    }
}

```

```

//Open the instrument
status = viOpen(defaultRM, SendAddr, VI_NULL, VI_NULL, &instr);

//Read from the instrument
status = viRead(instr, RecBuf, MAX_REC_SIZE, &retCount);

//Close the system
status = viClose(instr);
status = viClose(defaultRM);

(*pstrResult).Format("%s", RecBuf);

return bReadOK;
}

```

- 3) Encapsulate the read operation with exception handling function of VISA.
 ViStatus CDemoForRSADlg::OpenVisaDevice(CString strAddr) //Open a VISA device

```

{
  ViStatus status;
  char * SendAddr = NULL;

  // Change the address's data style from CString to char*
  SendAddr = strAddr.GetBuffer(strAddr.GetLength());
  strcpy(SendAddr, strAddr);
  strAddr.ReleaseBuffer();

  //Open a VISA resource
  status = viOpenDefaultRM(&m_SessRM);

  if (status == 0)
  {
    //Open the device
    status = viOpen(m_SessRM, SendAddr, VI_NULL, VI_NULL, &m_SessInstr);

    //If you fail to open the connection, close the resource
    if (status != 0)
    {
      viClose(m_SessRM);
    }
  }

  return status;
}

```

```

ViStatus CDemoForRSADlg::CloseVisaDevice() //Close a VISA device
{
  ViStatus status;

  //Close the device
  status = viClose(m_SessInstr);

  if (status == 0)
  {
    //close the resource
    status = viClose(m_SessRM);
  }
}

```

```

return status;
}

```

```

bool CDemoForRSADlg::InstrWriteEx(CString strAddr, CString strContent) //Write operation with
exception handling

```

```

{
    ViStatus status;
    ViUInt32 retCount;
    char * SendBuf = NULL;
    bool bWriteOK = true;

    // Change the address's data style from CString to char*
    SendBuf = strContent.GetBuffer(strContent.GetLength());
    strcpy(SendBuf, strContent);
    strContent.ReleaseBuffer();

    do
    {
        //Write command to the instrument
        status = viWrite(m_SessInstr, (unsigned char *)SendBuf, strlen(SendBuf), &retCount);

        //If an error occurs, perform error handling
        if (status < 0)
        {
            //If the time exceeds the limit value, resend the command after a delay of 1s
            if (VI_ERROR_TMO == status)
            {
                Sleep(1000);
                status = viWrite(m_SessInstr, (unsigned char *)SendBuf, strlen(SendBuf),
                                &retCount);
            }
            else
            {
                //If another error occurs, reopen the connection after the connection is closed
                //and resend the command
                status = CloseVisaDevice();
                Sleep(1000);
                status = OpenVisaDevice(m_strInstrAddr);
                if (status == 0)
                {
                    status = viWrite(m_SessInstr, (unsigned char *)SendBuf, strlen(SendBuf),
                                    &retCount);
                }
            }
        }
    } while (status < 0);

    return bWriteOK;
}

```

```

bool CDemoForRSADlg::InstrReadEx(CString strAddr, CString *pstrResult) //Read operation with
exception handling

```

```

{
    ViStatus status;
    ViUInt32 retCount;
    char * SendAddr = NULL;

```

```

unsigned char RecBuf[MAX_REC_SIZE];
bool bReadOK = true;

// Change the address's data style from CString to char*
SendAddr = strAddr.GetBuffer(strAddr.GetLength());
strcpy(SendAddr, strAddr);
strAddr.ReleaseBuffer();

memset(RecBuf, 0, MAX_REC_SIZE);

do
{
    //Read from the instrument
    status = viRead(m_SessInstr, RecBuf, MAX_REC_SIZE, &retCount);
    if (status < 0)
    {
        //If the time exceeds the limit value, read from the instrument after a delay of 1s
        if (VI_ERROR_TMO == status)
        {
            Sleep(1000);
            status = viRead(m_SessInstr, RecBuf, MAX_REC_SIZE, &retCount);
        }
        else
        {
            //If another error occurs, reopen the connection after the connection is closed
            //and reread from instrument
            status = CloseVisaDevice();
            Sleep(1000);
            status = OpenVisaDevice(m_strInstrAddr);
            if (status == 0)
            {
                status = viRead(m_SessInstr, RecBuf, MAX_REC_SIZE, &retCount);
            }
        }
    }
} while (status < 0);

(*pstrResult).Format("%s", RecBuf);

return bReadOK;
}

```

7. Add the control message response codes.

- 1) Connect to the instrument


```

void CDemoForRSADlg::OnBtConnectInstr()           // Connect to the instrument
{
    //TODO: Add your control notification handler code here
    ViStatus status;
    ViSession defaultRM;
    ViString expr = "?*";
    ViPFindList findList = new unsigned long;
    ViPUInt32 retcnt = new unsigned long;
    ViChar instrDesc[1000];
    CString strSrc = "";
    CString strInstr = "";
    unsigned long i = 0;

```

```

bool bFindRSA = false;

status = viOpenDefaultRM(&defaultRM);
if (status < VI_SUCCESS)
{
    // Error Initializing VISA...exiting
    MessageBox("No VISA instrument was opened ! ");
    return ;
}

memset(instrDesc,0,1000);

// Find resource
status = viFindRsrc(defaultRM,expr,findList, retcnt, instrDesc);

for (i = 0;i < (*retcnt);i++)
{
    // Get instrument name
    strSrc.Format("%s",instrDesc);
    InstrWrite(strSrc,"*IDN?");
    ::Sleep(200);
    InstrRead(strSrc,&strInstr);

    // If the instrument(resource) belongs to the RSA series then jump out //from the loop
    strInstr.MakeUpper();
    if (strInstr.Find("RSA") >= 0)
    {
        bFindRSA = true;
        m_strInstrAddr = strSrc;
        break;
    }

    //Find next instrument
    status = viFindNext(*findList,instrDesc);
}

if (bFindRSA == false)
{
    MessageBox("Didn't find any RSA!");
}
UpdateData(false);
}

```

- 2) Write Operation


```

void CDemoForRSADlg::OnBtWrite()           //Write operation
{
    //TODO: Add your control notification handler code here
    UpdateData(true);
    if (m_strInstrAddr.IsEmpty())
    {
        MessageBox("Please connect to the instrument first!");
    }
    InstrWrite(m_strInstrAddr,m_strCommand);
    m_strResult.Empty();
    UpdateData(false);
}

```


- 3) Read Operation

```
void CDemoForRSADlg::OnBtRead()           //Read operation
{
    //TODO: Add your control notification handler code here
    UpdateData(true);
    InstrRead(m_strInstrAddr,&m_strResult);
    UpdateData(false);
}
```

8. Run the results.

- 1) Click **Connect** to search for the spectrum analyzer;
- 2) Input "*IDN?" in the "Command" edit box;
- 3) Click **Write** to write the command into the spectrum analyzer;
- 4) Click **Read** to read the return value.


The execution result is as shown in the figure below.

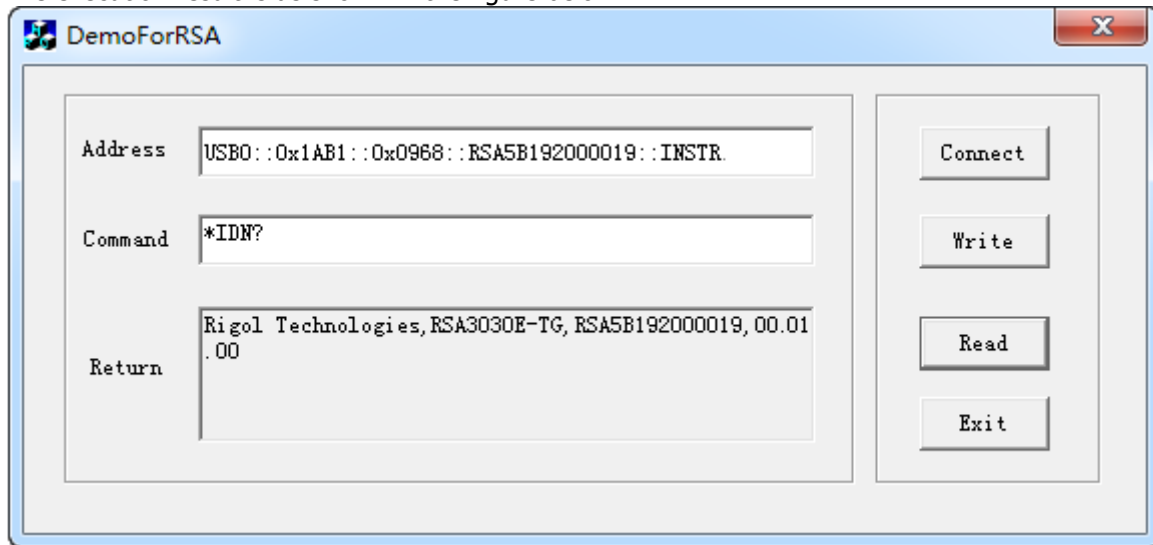

Visual Basic 6.0 Programming Example


Enter the Visual Basic 6.0 programming environment, and perform the following procedures.

1. Build a standard application program project (Standard EXE), and name it "DemoForRSA".
2. Open **Project → Add File....** Search for the **visa32.bas** file from the **include** folder in the installation path of NI-VISA, and then add the file to the project. The visa32.bas module contains all VISA functions and constant statements.

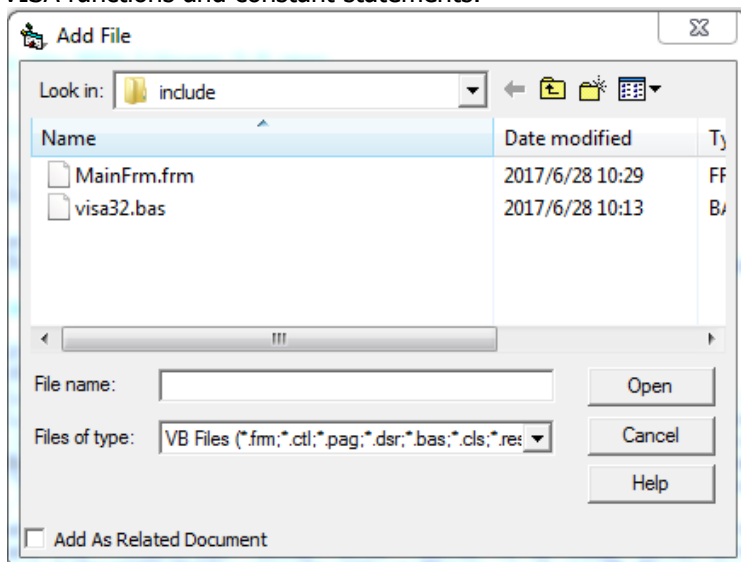

Then, add the **Declare Sub Sleep Lib "kernel32" (ByVal dwMilliseconds As Long)** statement into the **visa32.bas** module; or you can also create a new module to declare the Sleep function.

3. Add the Label, Text, and Button controls. The layout interface for adding controls is as follows:

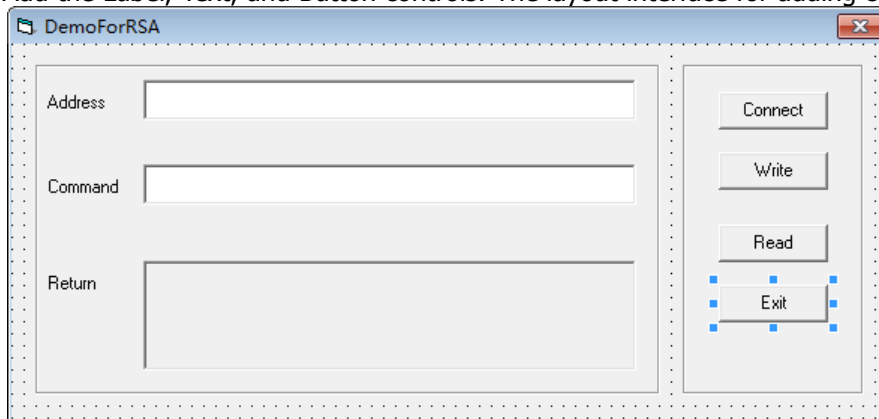

4. Encapsulate the read and write operations of VISA.
 - 1) Encapsulate the write operation of VISA for easier operation.

```

'-----
'Function Name: InstrWrite
'Function: Send command to the instrument
'Input:  rsrcName,instrument(resource) name
        strCmd,Command
'-----

Public Sub InstrWrite(rsrcName As String, strCmd As String)
    Dim status As Long
    Dim dfltRM As Long
    Dim sesn As Long
  
```

```

Dim rSize As Long

'Initialize the system
status = viOpenDefaultRM(dfItRM)
'Failed to initialize the system
If (status < VI_SUCCESS) Then
    MsgBox " No VISA resource was opened ! "
    Exit Sub
End If
'Open the VISA instrument
status = viOpen(dfItRM, rsrcName, VI_NULL, VI_NULL, sesn)
'Failed to open the instrument
If (status < VI_SUCCESS) Then
    MsgBox "Failed to open the instrument ! "
    Exit Sub
End If

'Write command to the instrument
status = viWrite(sesn, strCmd, Len(strCmd), rSize)
'Failed to write to the instrument
If (status < VI_SUCCESS) Then
    MsgBox " Failed to write to the instrument ! "
    Exit Sub
End If

'Close the system
status = viClose(sesn)
status = viClose(dfItRM)

```

End Sub

- 2) Encapsulate the read operation of VISA for easier operation.

```

'-----
'Function Name: InstrRead
'Function: Read the return value from the instrument
'Input: rsrcName,Resource name
'Return: The string gotten from the instrument
'-----

Public Function InstrRead(rsrcName As String) As String
    Dim status As Long
    Dim dfItRM As Long
    Dim sesn As Long
    Dim strTemp0 As String * 256
    Dim strTemp1 As String
    Dim rSize As Long

    'Begin by initializing the system
    status = viOpenDefaultRM(dfItRM)
    'Initialization failed
    If (status < VI_SUCCESS) Then
        MsgBox " Failed to open the instrument! "
        Exit Function
    End If
    'Open the instrument
    status = viOpen(dfItRM, rsrcName, VI_NULL, VI_NULL, sesn)
    'Failed to open the instrument
    If (status < VI_SUCCESS) Then

```

```

        MsgBox " Failed to open the instrument! "
    Exit Function
End If

'Read from the instrument
status = viRead(sesn, strTemp0, 256, rSize)
'Reading failed
If (status < VI_SUCCESS) Then
    MsgBox " Failed to read from the instrument! "
    Exit Function
End If

'Close the system
status = viClose(sesn)
status = viClose(dfltRM)

'Remove the space at the end of the string
strTemp1 = Left(strTemp0, rSize)
InstrRead = strTemp1
End Function

```

5. Add the control event codes.

1) Connect to the instrument

```

'Connect to the instrument
Private Sub CmdConnect_Click()
    Const MAX_CNT = 200
    Dim status As Long
    Dim dfltRM As Long
    Dim sesn As Long
    Dim fList As Long
    Dim buffer As String * MAX_CNT, Desc As String * 256
    Dim nList As Long, retCount As Long
    Dim rsrcName(19) As String * VI_FIND_BUFLen, instrDesc As String * VI_FIND_BUFLen
    Dim i, j As Long
    Dim strRet As String
    Dim bFindRSA As Boolean

    'Initialize the system
    status = viOpenDefaultRM(dfltRM)
    'Initialization failed
    If (status < VI_SUCCESS) Then
        MsgBox " No VISA resource was opened ! "
        Exit Sub
    End If

    'Find instrument resource
    Call viFindRsrc(dfltRM, "USB?*INSTR", fList, nList, rsrcName(0))
    'Get the list of the instruments (resources)
    strRet = ""
    bFindRSA = False
    For i = 0 To nList - 1
        'Get the instrument name
        InstrWrite rsrcName(i), "*IDN?"
        Sleep 200
        strRet = InstrRead(rsrcName(i))
        'Continuing searching for the resource until an RSA instrument is found
        strRet = UCase(strRet)
    Next i

```

```

j = InStr(strRet, "RSA")
If (j >= 0) Then
    bFindRSA = True
    Exit For
End If

Call viFindNext(fList + i - 1, rsrcName(i))
Next i
'Display
If (bFindRSA = True) Then
    TxtInsAddr.Text = rsrcName(i)
Else
    TxtInsAddr.Text = ""
End If
End Sub

```

2) Write Operation

'Write the command to the instrument

```

Private Sub CmdWrite_Click()
    If (TxtInsAddr.Text = "") Then
        MsgBox ("Please write the instrument address! ")
    End If

    InstrWrite TxtInsAddr.Text, TxtCommand.Text
End Sub

```

3) Read Operation

'Read the return value from the instrument

```


Private Sub CmdRead_Click()
    Dim strTemp As String
    strTemp = InstrRead(TxtInsAddr.Text)
    TxtReturn.Text = strTemp
End Sub

```

6. Run the results.

- 1) Click **Connect** to search for the spectrum analyzer;
- 2) Input "*IDN?" in the "Command" edit box;
- 3) Click **Write** to write the command into the spectrum analyzer;
- 4) Click **Read** to read the return value.


The execution result is as shown in the figure below.

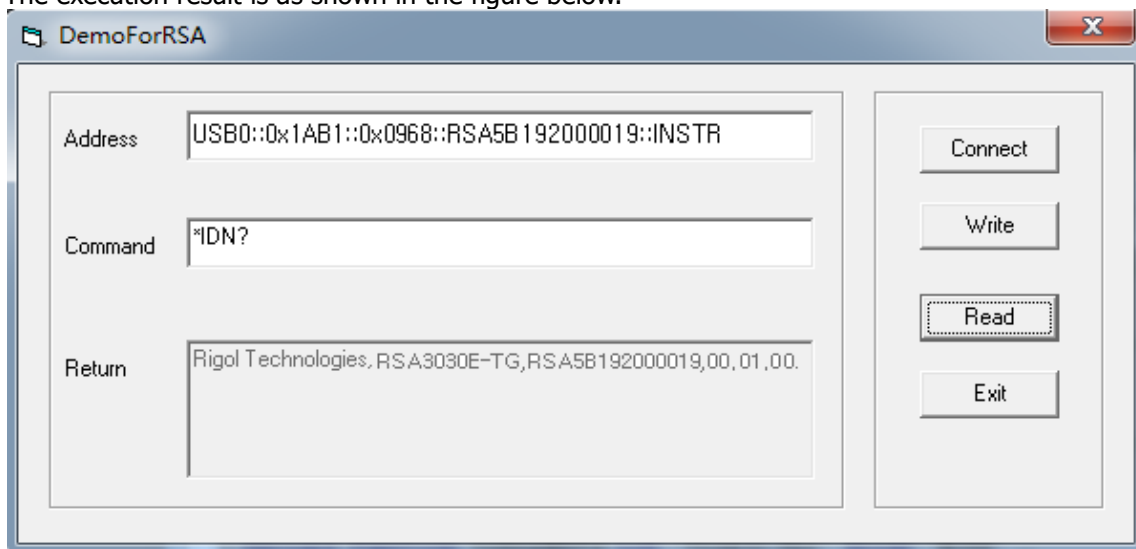


LabVIEW 2010 Programming Example

Enter the Labview 2010 programming environment, and perform the following procedures.


1. Create a VI file, and name it "DemoForRSA".
2. Add controls to the front panel interface, including the **Address** field, **Command** field, and **Return** field, the **Connect** button, the **Write** button, the **Read** button, and the **Exit** button.

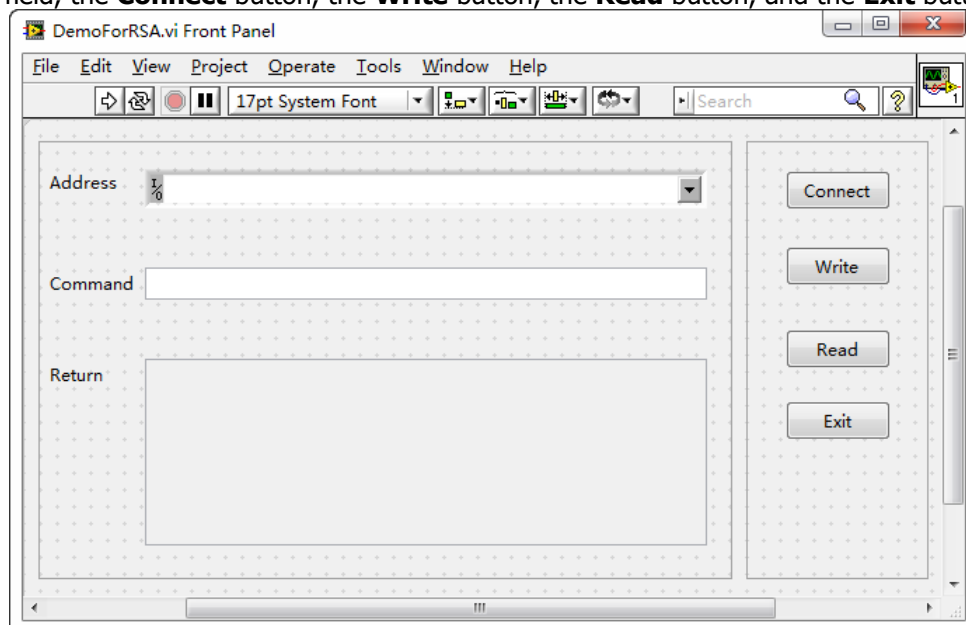


3. Click **Show Block Diagram** under the **Window** menu to create an event structure.

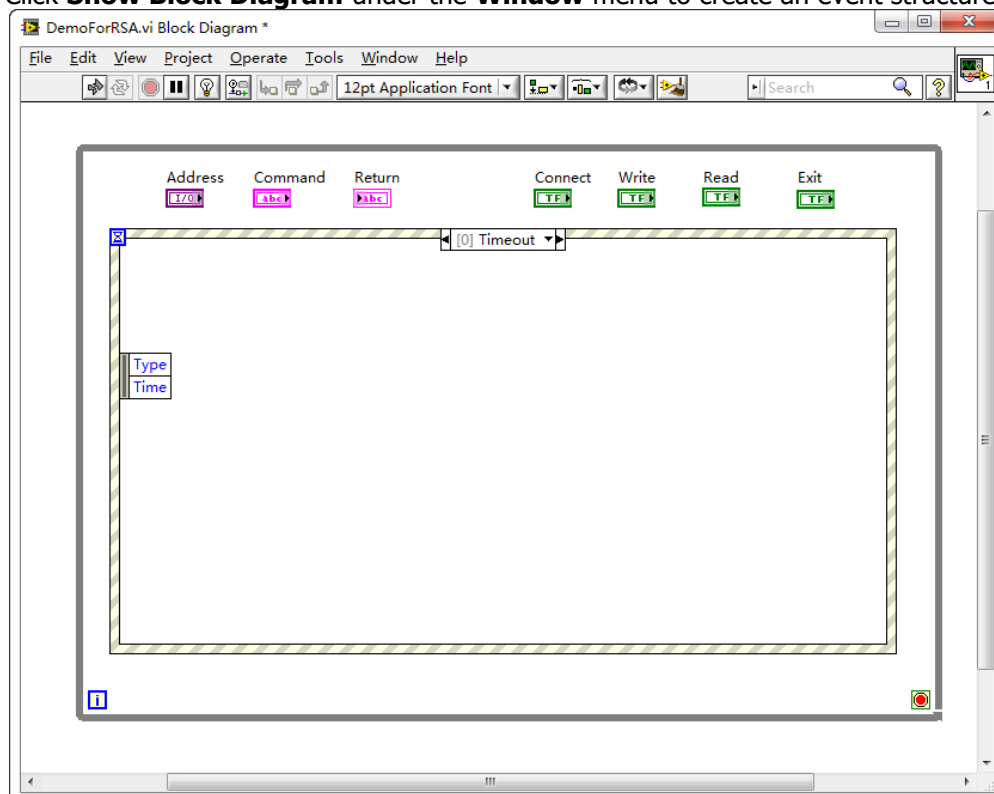


4. Add the events (including connecting to the instrument, write operation, read operation, and exit)
 - 1) Connect to the instrument

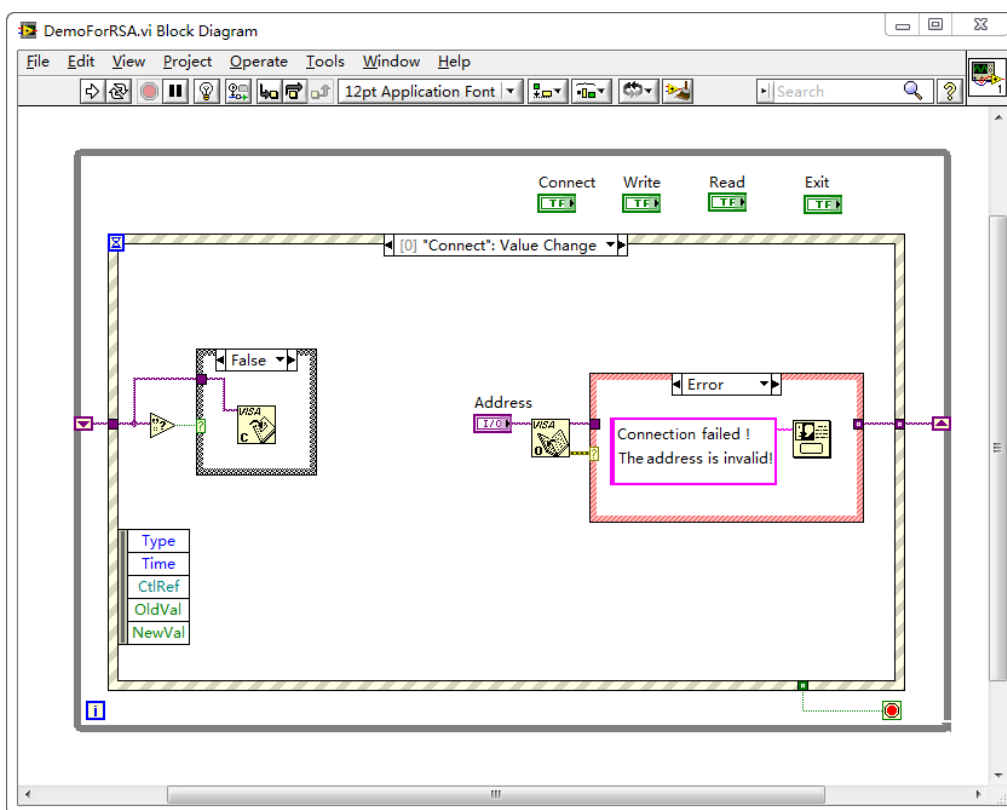



2) Write operation (including error confirmation)

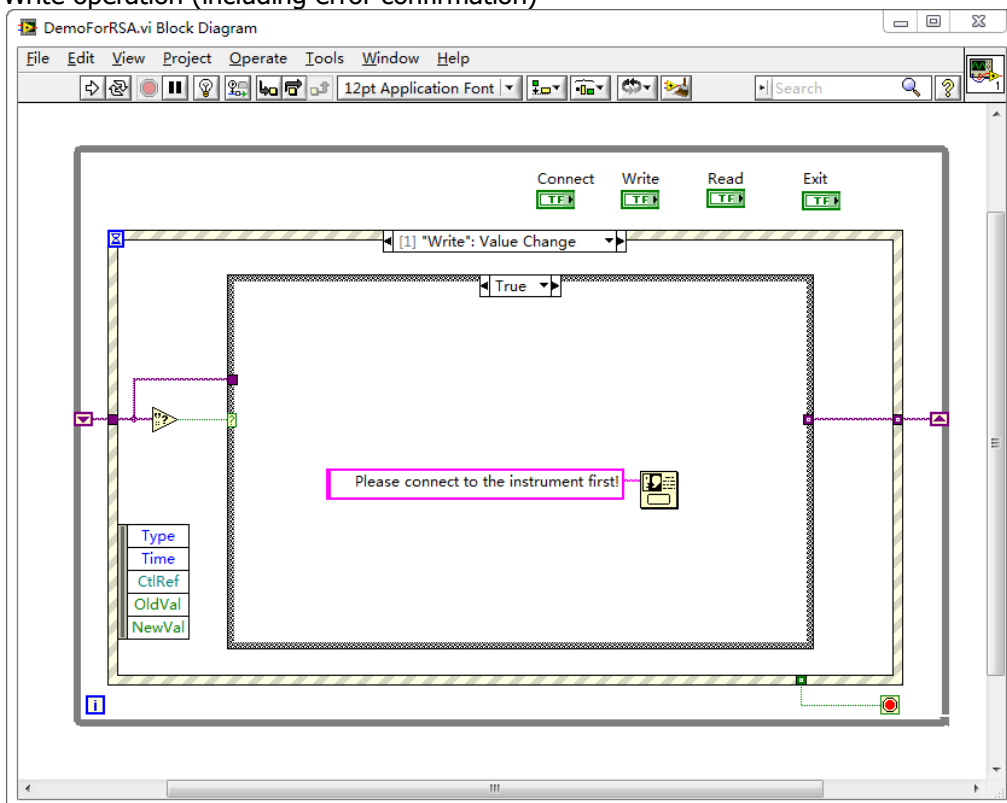

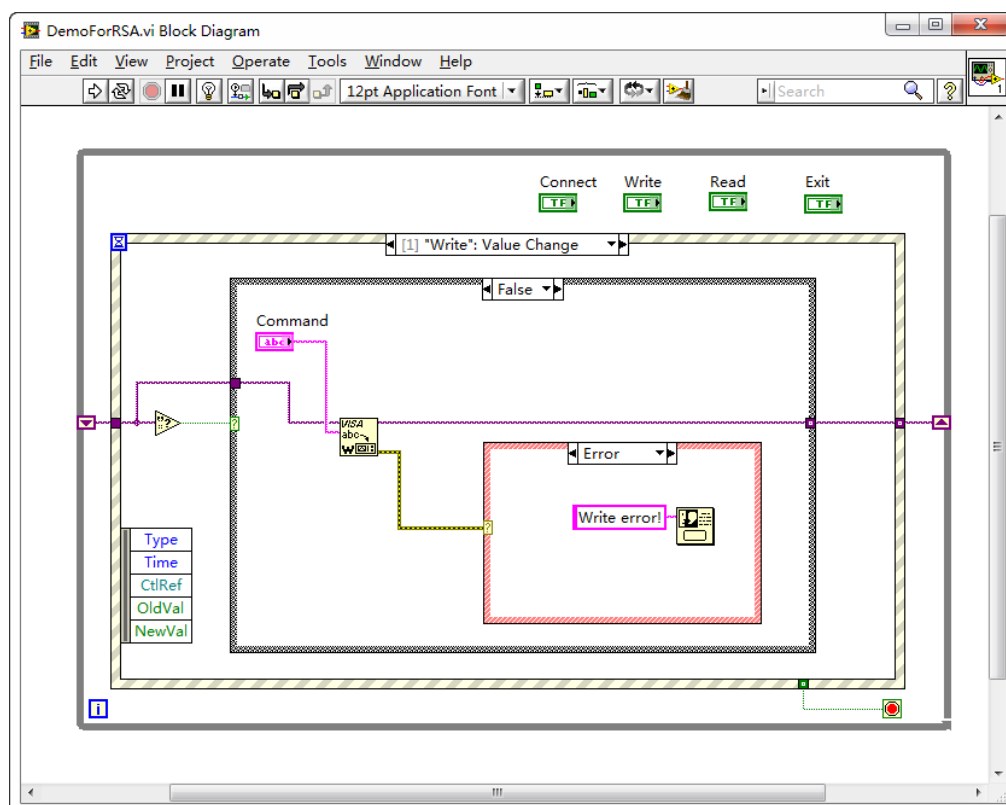


3) Read operation (including error correction advice)

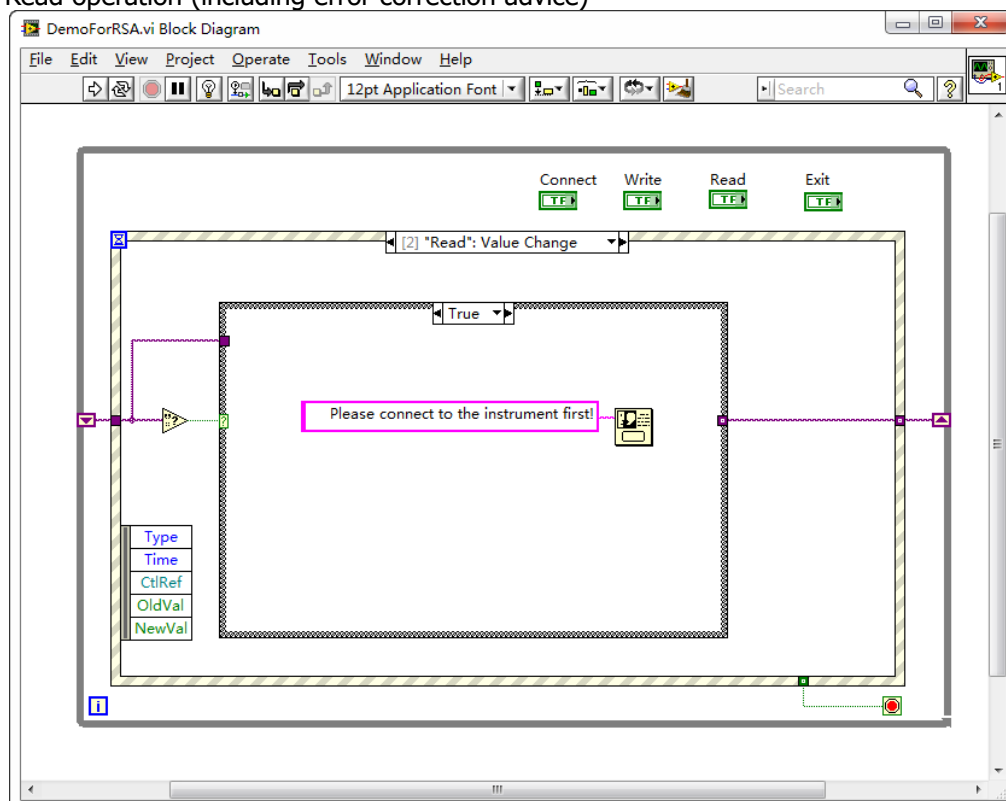

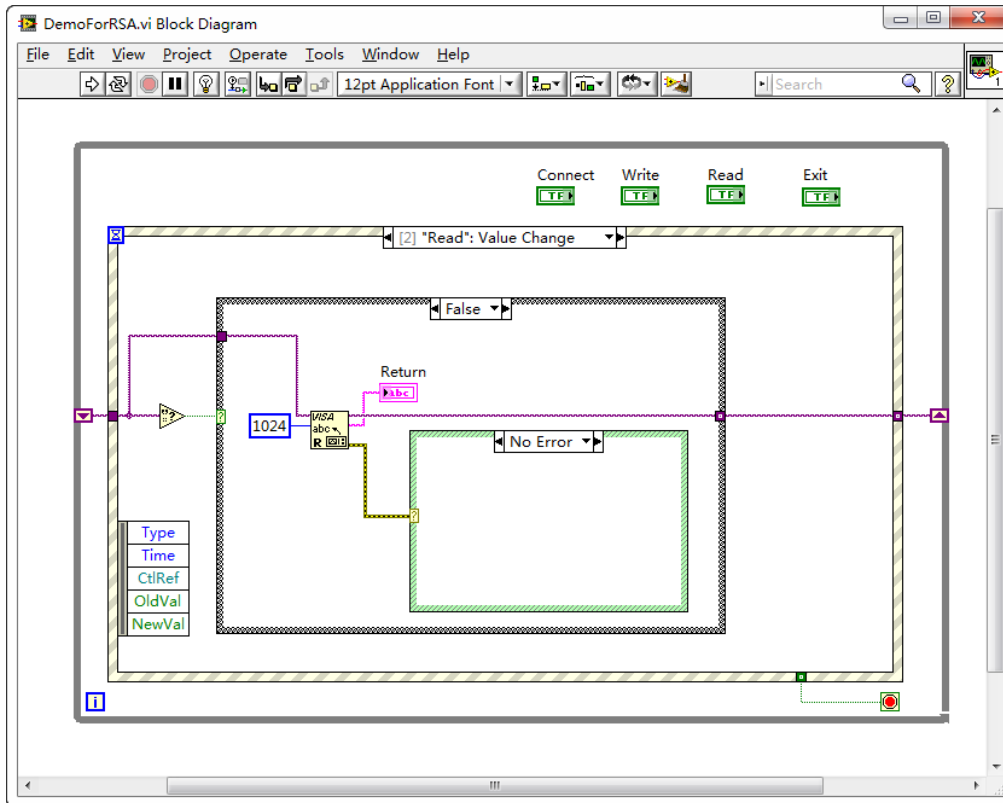


4) Exit

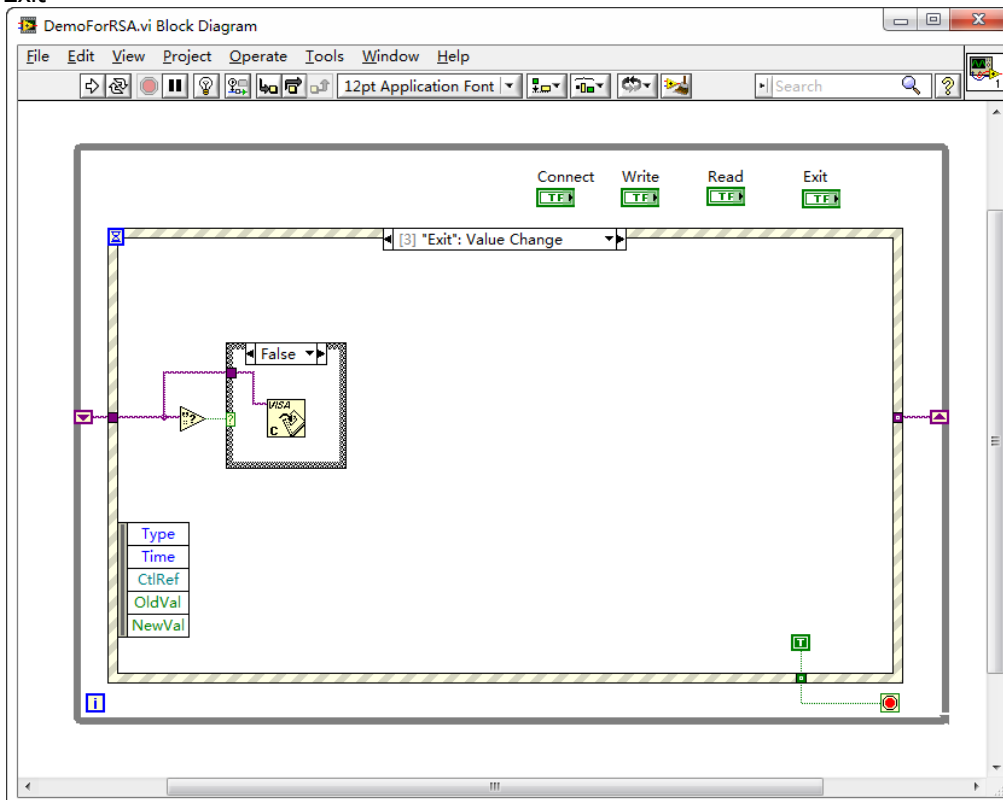

- Run the program, and then the following interface is displayed below. Click the VISA resource name from the drop-down list under **Address**, and click **Connect** to connect the instrument. Then, input a command in the **Command** field. Click **Write** to write the command to the instrument. If the command is a query (e.g.*IDN?), click **Write** to write the command into the instrument, and then click **Read**. The return value is displayed in the **Return** field. Click **Exit** to

exit the program.

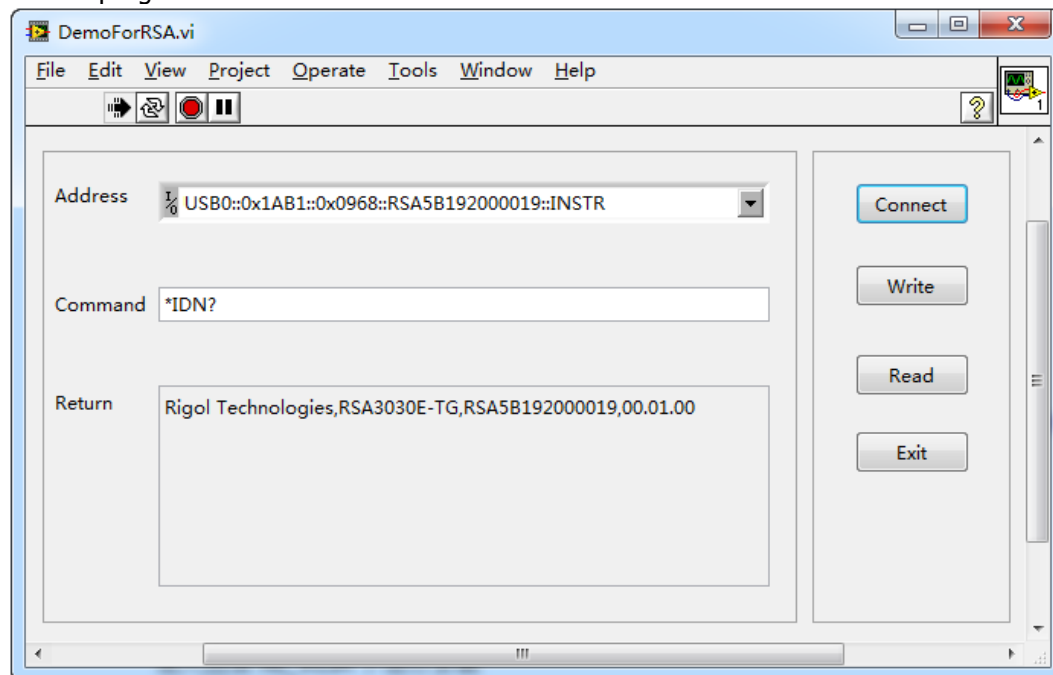

Linux Programming Example

This section illustrates how to program and control the spectrum analyzer to realize the common functions in Linux operating system.

Programming Preparations

1. Programming environment:
Operating system: Fedora 8 (Linux-2.6.23)
GCC version: gcc-4.1.2
2. Install the VISA library. First, check whether your PC has installed NI's VISA library. If not, download it from NI website (<http://www.ni.com/visa/>). The installation procedures are as follows:
Download the VISA library NI-VISA-4.4.0.ISO from the NI website.

Create a new directory.

```
#mkdir NI_VISA
```

Mount the isofile

```
#mount -o loop -t iso9660 NI-VISA-4.4.0.iso NI_VISA
```

Enter the NI_VISA directory to install

```
#cd NI_VISA
```

```
#./INSTALL
```

Unmount the isofile

```
#umount NI_VISA
```

After the installation is finished, the default installation path is /usr/local.

3. Build communication between the spectrum analyzer and the PC. Use the network cable to connect the analyzer to the PC via the LAN interface on the rear panel of the analyzer. You can also use a network cable to connect the spectrum analyzer to the local area network where the PC resides.

After the spectrum analyzer is connected to the PC properly, configure the network address for the

spectrum analyzer to make its address to be within the same network segment where the PC resides. For example, if the network address and DNS setting configured for the PC are as shown in the figures below, then, the network address of the spectrum analyzer should be configured as follows.


IP Address: 172.16.3.X*


Default Gateway: 172.16.3.1

Subnet Mask: 255.255.255.0

DNS: 172.16.2.2


Note*: X can be any value not in use from 2 to 254.

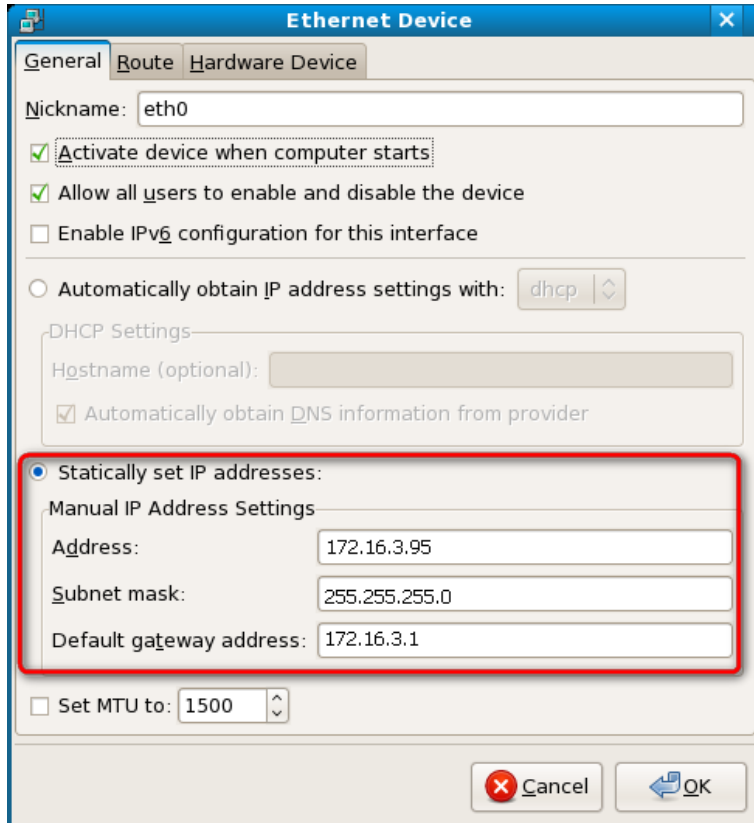

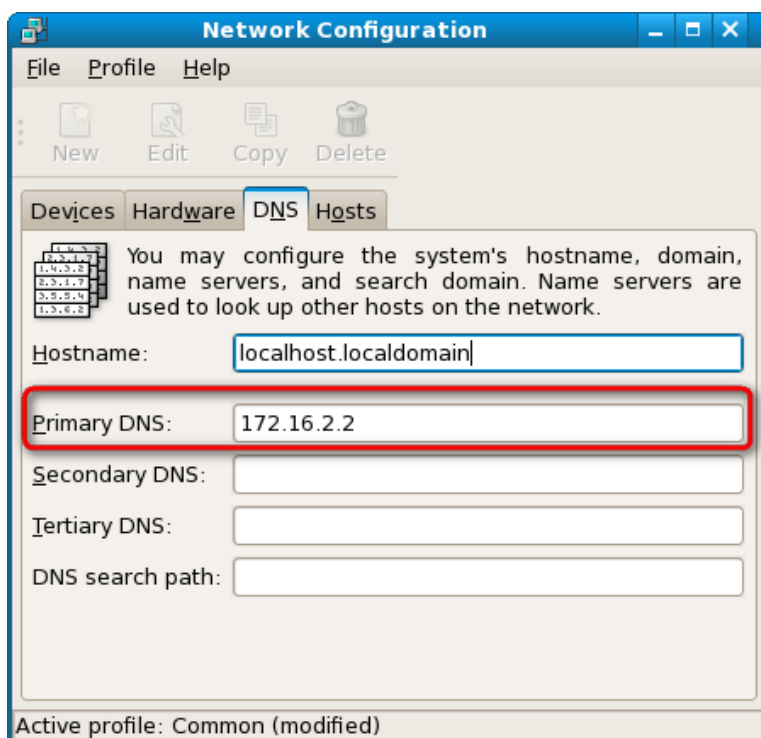


4. Use either of the following two methods to add the library location to the search path of the library, so that the program can load the installed library file automatically.

Method 1: Specify the search path of the library in the environment variable LD_LIBRARY_PATH. Operation Method: Add the library file path /usr/local/lib to the LD_LIBRARY_PATH variable in the /etc/profile file, as shown in the figure below.

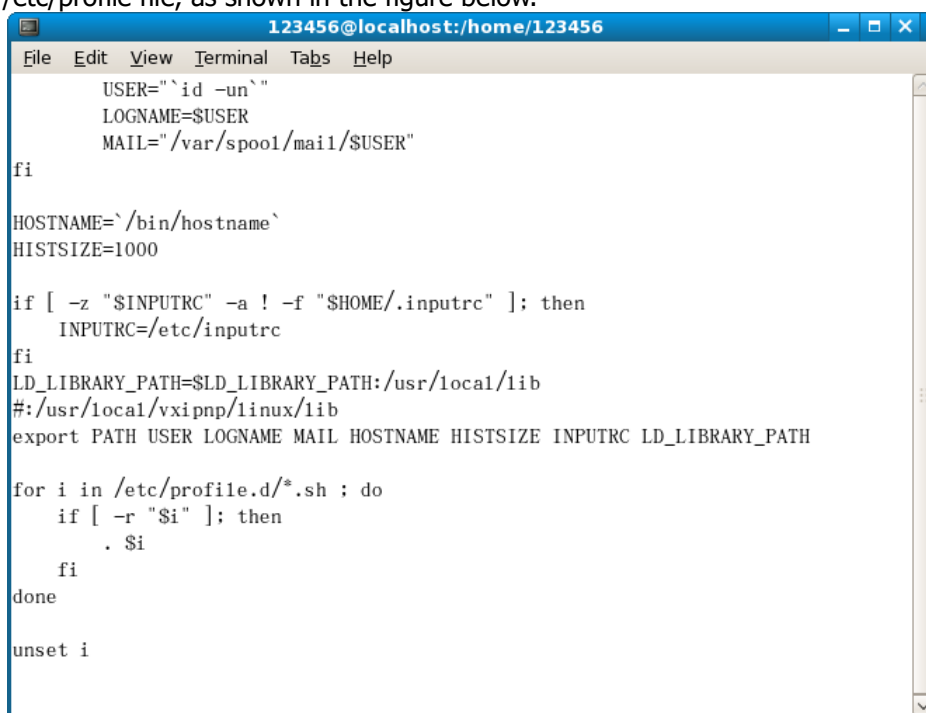

Method 2: Add the search path of the library in the /etc/ld.so.conf file.

Operation Method: #echo "/usr/local/lib" >> /etc/ld.so.conf, as shown in the figure below. After setting the search path of the library in /etc/ld.so.conf, run the /sbin/ldconfig command to update /etc/ld.so.cache (this command should have the root permission) to ensure the location of the library when executing the program.

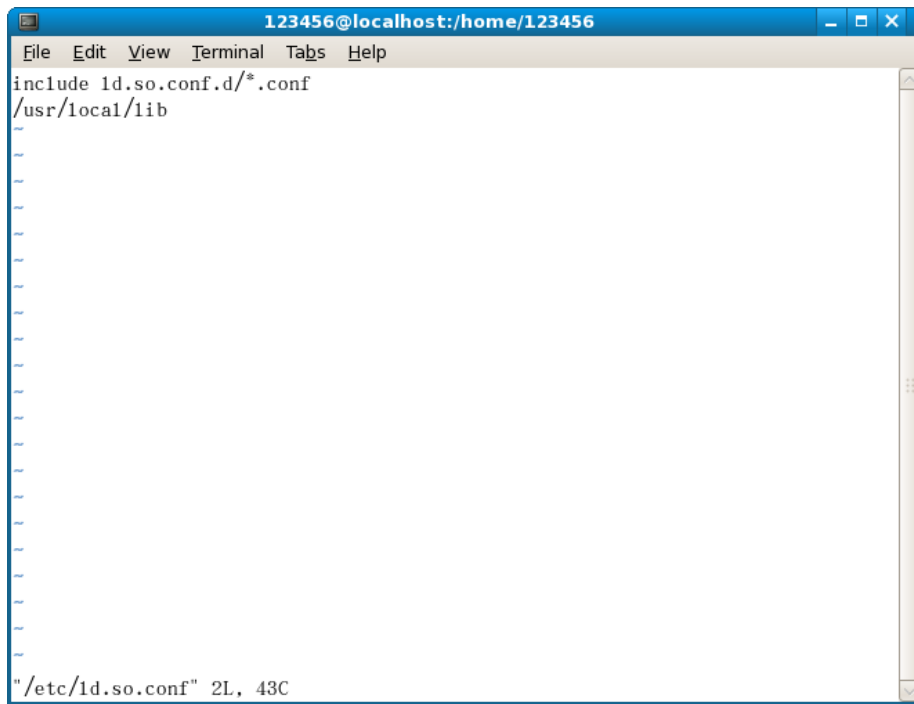

Linux Programming Procedures

1. Edit the DemoForRSA.h header file and declare a class to encapsulate the operation and property of the instrument.

```
#ifndef DEMO_FOR_RSA_H
#define DEMO_FOR_RSA_H

#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <iostream>
// #include <syswait.h>
using namespace std;

#define MAX_SEND_BUF_SIZE 50
#define MAX_REC_SIZE 300

class DemoForRSA
{
// Construction
public:
DemoForRSA();
bool InstrRead(string strAddr, string & pstrResult);
bool InstrWrite(string strAddr, string strContent);
bool ConnectInstr();

string m_strInstrAddr;
string m_strResult;
string m_strCommand;

};

void makeupper(string & instr);
```

```
#endif
```

2. Edit the DemoForRSA.cpp file to realize various operations of the instrument.

```
#include "visa.h"
```

```
#include "DemoForRSA.h"
```

```
DemoForRSA::DemoForRSA()
```

```
{
    m_strInstrAddr = "";
    m_strResult = "";
    m_strCommand = "";
}
```

```
bool DemoForRSA::ConnectInstr()
```

```
{
    ViUInt32 retCount;
    ViStatus status;
    ViSession defaultRM;
    ViString expr = "?*";
    ViPFindList findList = new unsigned long;
    ViPUInt32 retcnt = new unsigned long;
    string strSrc = "";
    string strInstr = "";
    ViChar instrDesc[1000];
```

```
    unsigned long i = 0;
    bool bFindRSA = false;
    memset(instrDesc,0,1000);
```

```
//Turn on the VISA device
```

```
status = viOpenDefaultRM(&defaultRM);
```

```
if (status < VI_SUCCESS)
{
    cout<<"No VISA equipment!"<<endl;
    return false;
}
```

```
//Search for resources
```

```
status = viFindRsrc(defaultRM,expr,findList, retcnt, instrDesc);
```

```
for (i = 0;i < (*retcnt);i++)
```

```
{
    //Acquire the instrument name
    strSrc = instrDesc;
```

```
    InstrWrite(strSrc, "*IDN?");
    usleep(200);
    InstrRead(strSrc,strInstr);
```

```
//If the RSA series is found, then exit
```

```
makeupper(strInstr);
if (strInstr.find("RSA",0) > 0)
{
    bFindRSA = true;
    m_strInstrAddr = strSrc;
```

```

        break;
    }

    //Acquire the next device
    status = viFindNext(*findList,instrDesc);
}

if (bFindRSA == false)
{
    printf("RSA device not found!\n");
    return false;
}

    return true;
}

bool DemoForRSA::InstrWrite(string strAddr, string strContent) //Write operation
{
    ViSession defaultRM,instr;
    ViStatus status;
    ViUInt32 retCount;
    char * SendBuf = NULL;
    char * SendAddr = NULL;
    bool bWriteOK = false;
    string str;

    //Address conversion, convert the string type to char*
    SendAddr = const_cast<char*>(strAddr.c_str());

    //Address conversion, convert the string type to char*
    SendBuf = const_cast<char*>(strContent.c_str());

    //Turn on the specified device
    status = viOpenDefaultRM(&defaultRM);
    if (status < VI_SUCCESS)
    {
        cout<<"No VISA equipment!"<<endl;
        return false;
    }

    status = viOpen(defaultRM, SendAddr, VI_NULL, VI_NULL, &instr);

    //Write command to the device
    status = viWrite(instr, (unsigned char *)SendBuf, strlen(SendBuf), &retCount);

    //Turn off the device
    status = viClose(instr);
    status = viClose(defaultRM);
    return bWriteOK;
}

bool DemoForRSA::InstrRead(string strAddr, string & pstrResult) //Read operation
{
    ViSession defaultRM,instr;
    ViStatus status;
    ViUInt32 retCount;
    char* SendAddr = NULL;
    char * result = NULL;

```

```

bool bReadOK = false;
unsigned char RecBuf[MAX_REC_SIZE];
string str;
memset(RecBuf,0,MAX_REC_SIZE);

result=(char*)malloc(MAX_REC_SIZE*sizeof(char));
memset(result,0,MAX_REC_SIZE);

//Address conversion, convert the string type to char*
SendAddr=(const_cast<char*>(strAddr.c_str()));

//Turn on the VISA device
status = viOpenDefaultRM(&defaultRM);
if (status < VI_SUCCESS)
{
    // Error Initializing VISA...exiting
    cout<<"No VISA equipment!"<<endl;
    return false;
}

//Turn on the specified device
status = viOpen(defaultRM, SendAddr, VI_NULL, VI_NULL, &instr);

//Read from the device
status = viRead(instr, RecBuf, MAX_REC_SIZE, &retCount);

//Turn off the device
status = viClose(instr);
status = viClose(defaultRM);
sprintf(result,"%s",RecBuf);
pstrResult = result;
free(result);
return bReadOK;
}

void makeupper( string &instr)
{
    string outstr = "";
    if(instr == "")
    {
        exit(0);
    }

    for(int i = 0;i < instr.length();i++)
    {
        instr[i] = toupper(instr[i]);
    }
}

```

3. Edit the function file mainloop.cpp to complete the flow control.

```

#include "DemoForRSA.h"

void menudisplay()
{
    cout<<"\t\t Please operate the instrument:\n read write quit"<<endl;
}

```

```

int main()
{
    DemoForRSA demo;
    char temp[50];
    if(!demo.ConnectInstr())
    {
        cout<<"can not connect the equipment!"<<endl;
        return 0;
    }
    else
    {
        cout<<"\n connect equipment success!"<<endl;
        cout<<" the equipment address is :"<<demo.m_strInstrAddr<<endl;
    }

    while(1)
    {
        menudisplay();
        //cin>>demo.m_strCommand;
        cin.getline(temp,50);
        demo.m_strCommand=temp;
        if(demo.m_strCommand[0]='r' && demo.m_strCommand[1]='e'
            && demo.m_strCommand[2]='a' && demo.m_strCommand[3]='d')
        {
            //demo.InstrWrite(demo.m_strInstrAddr,"*IDN?");
            //demo.InstrRead(demo.m_strInstrAddr,demo.m_strResult);
            cout<<"read result:"<<demo.m_strResult<<endl;
            demo.m_strResult="";
        }

        else if (demo.m_strCommand[0]='w' && demo.m_strCommand[1]='r'
            && demo.m_strCommand[2]='i' && demo.m_strCommand[3]='t' &&
            demo.m_strCommand[4]='e')
        {
            if (demo.m_strInstrAddr=="")
            {
                cout<<"Please connect the instrument! \ n";
            }
            demo.InstrWrite(demo.m_strInstrAddr,demo.m_strCommand.substr(5,40));
            usleep(200);

            //Read operation
            demo.InstrRead(demo.m_strInstrAddr,demo.m_strResult);
        }

        else if (demo.m_strCommand[0] == 'q' && demo.m_strCommand[1] == 'u'
            && demo.m_strCommand[2] == 'i' && demo.m_strCommand[3] == 't')
        {
            break;
        }
        else if(demo.m_strCommand != "")
        {

```



```

        cout<<"Bad command!"<<endl;
    }
}
return 1;

}

```

4. makefile file
src = DemoForRSA.cpp mainloop.cpp DemoForRSA.h

```

obj = DemoForRSA.o mainloop.o
INCLUDE= -I/usr/local/vxipnp/linux/include
LIB= -lvisa -lc -lpthread
CC=
demo : $(obj)
$(CC) $(INCLUDE) $(LIB) -o demo $(obj)

mainloop.o : mainloop.cpp DemoForRSA.h
$(CC) -c $< -o $@
DemoForRSA.o: DemoForRSA.cpp DemoForRSA.h
$(CC) -c $< -o $@

.PHONY : clean
clean:
rm demo $(obj)

```

5. Run the results.
- 1) #make
 - 2) ./demo
 - 3) When the program runs, the instrument is connected automatically. If no instrument is found, a prompt message "No VISA equipment!" is displayed, and the system exits the program. If the instrument is found and successfully connected, the following interface is displayed, as shown in the figure below.
 - 4) Input write<command> (for example, write<*IDN?>) to write the command into the spectrum analyzer.
 - 5) Input "read" to read the return value, as shown in the figure below.

```

123456@localhost:~/last
File Edit View Terminal Tabs Help
[123456@localhost last]$ ./demo

        connetc equipment success!
    the equipment address is :TCPIP0::172.16.3.95::INSTR
    Please operate the instrument:
        read write quit
write*IDN?
        Please operate the instrument:
            read write quit
read
read result:Rigol Technologies, RSA3030E-TG,RSA5B192000019,00.01.00

        Please operate the instrument:
            read write quit

```


Chapter 6 Appendix

Appendix A: Default Settings

Sending the [*RST](#) command can restore the instrument to default settings, as shown in the table below.

Parameter Name	GPSA Parameter Value	RTSA Parameter Value	
		Non-PvT	PvT
FREQ			
Center Freq	1.5 GHz	1.5 GHz	
Start Freq	0 Hz	1.495 GHz	
Stop Freq	3 GHz	1.505 GHz	
CF Step	Auto, 300 MHz	Auto, 1 MHz	
Freq Offset	0 Hz	0 Hz	
Signal Track	Off	--	
SPAN			
Span	3 GHz	10 MHz	
Ref Value	--	--	0 us
Scale/Div	--	--	3.1946 ms
Ref Position	--	--	Left
Auto Scale	--	--	Auto
AMPT			
Ref Level	0 dBm	0 dBm	
Attenuation	Auto, 10 dB	Auto, 10 dB	
RF Preamp	Off	Off	
Y Axis Unit	dBm	dBm	
Scale Type	Log	Log	
Scale/Div	10 dB	10 dB	
Max Mixer Lvl	-10 dBm	-10 dBm	
Ref Offset	0 dB	0 dB	
BW			
RBW	Auto, 3 MHz	Auto, 50.228 kHz (RBW2)	--
SPAN/RBW Ratio	Auto, 106	--	--
VBW	Auto, 3 MHz	--	--
VBW/RBW Ratio	Auto, 1	--	--
Filter Type	Gaussian	Kaiser	--
Sweep			
Sweep Points	801	--	
Sweep Time	Auto, 1 ms	--	
Acq Time	--	Auto, 32 ms	Auto, 31.9460 ms
Sweep Time Mode	Continuous	Continuous	
Sweep Time Rule	Normal	--	
Trigger			
Trigger Source	Free Run	Free Run	
Trigger Holdoff	Off, 100 ms	Off, 100 ms	
Auto Trig	Off, 100 ms	Off, 100 ms	
Slope	Positive	Positive	
Trig Delay	Off, 1 us	Off, 1 us	
Trigger Level	-25 dBm	--	
Acq/Trigger	--	1	
Power	--	0 dB	
Mask Type	--	Upper	
Trigger Mask	--	Upper	

Trigger Criteria	--	Enter	
Active Mask	--	Upper	
Frequency	--	1.4989950 GHz	
Amplitude	--	0 dBm	
Build From Trace	--	Trace1	
X Offset	--	0 Hz	
Y Offset	--	0 dB	
X Axis Type	--	Fixed	
Y Axis Type	--	Fixed	
Trace			
Selected Trace	Trace1	Trace1	--
Trace Type	Clear Write	Clear Write	--
Trace Det	Normal	Pos Peak	Pos Peak
Detector Auto	On	Off	On
Trace Update	On	On	On
Trace Display	On	On	On
Math Function	Off	--	--
Op1	Trace5	--	--
Op2	Trace6	--	--
Offset	0 dB	--	--
Reference	0 dBm	--	--
TG^[1]			
Output	Off	--	
Amplitude	-40 dBm	--	
Amplitude Offset	0 dB	--	
Normalize	Off	--	
Reference Level	0 dB	--	
Reference Position	100%	--	
Reference Trace	Off	--	
Mode Setup			
Global CF Mode	On, 1.5 GHz	On, 1.5 GHz	
Meas			
Measurement Function	Swept SA Measurement	Density Spectrogram	
Measure Setup (GPSA)			
Swept SA Measurement			
Avg Number	100		
Avg Mode	Log		
Avg State	On		
Test Limits	Off		
Select Limit	Limit1		
Limit State	Off		
Test Trace	Trace1		
Limit Type	Upper		
X to CF	Relative		
Y to Ref	Relative		
Margin	Off, 0 dB		
Frequency	0 Hz		
Amplitude	0 dBm		
Build From Trace	Trace1		
X Offset	0 Hz		
Y Offset	0 dB		
T-Power^[2]			
Avg Number	10		
Avg Mode	Exponential		

Avg State	On
TP Type	Peak
Start Line	0 us
Stop Line	1 ms
ACP^[2]	
Avg Number	10
Avg Mode	Exponential
Avg State	On
Main Chan BW	2 MHz
Adj Chan BW	2 MHz
Chan Spacing	2 MHz
Multichan Pwr^[2]	
Avg Number	10
Avg Mode	Exponential
Avg State	On
Channel Span	3 GHz
Channel Sheet	Off
Channel Freq	1.5 GHz
Occupied BW^[2]	
Avg Number	10
Avg Mode	Exponential
Avg State	On
Max Hold	Off
OBW Span	2 MHz
Power Ratio	99%
Emission BW^[2]	
Avg Number	10
Avg Mode	Exponential
Avg State	On
Max Hold	Off
EBW Span	2 MHz
EBW X dB	-10 dB
C/N Ratio^[2]	
Avg Number	10
Avg Mode	Exponential
Avg State	On
Offset Freq	2 MHz
Noise BW	2 MHz
Carrier BW	2 MHz
Harmo Dist^[2]	
Avg Number	10
Avg Mode	Exponential
Avg State	On
No. of Harmo	10
Harmonic ST	1 ms
TOI^[2]	
Avg Number	10
Avg Mode	Exponential
Avg State	On
TOI Span	2 MHz
Measure Setup(RTSA)	
Normal	
Avg Number	100
Test Limits	Off
Select Limit	Limit1

Limit State	Off		
Test Trace	Trace1		
Limit Type	Upper		
X to CF	Fixed		
Y to Ref	Fixed		
Margin	Off, 0 dB		
Frequency	0 Hz		
Amplitude	0 dBm		
Build From Trace	Trace1		
X Offset	0 Hz		
Y Offset	0 dB		
Density			
Avg Number	100		
Persistence	300 ms		
Pers Inf	Off		
Color Palettes	Warm		
Highest Density Hue	100		
Lowest Density Hue	0		
Curve Nonlinearity	75		
Hue Truncate	Off		
Spectrogram			
Avg Number	100		
Display Trace	1		
Trace Selection	Trace Number		
Couple Marker Trace	On		
Ref Hue	0		
Ref Hue Pos	100		
Bottom Hue Pos	0		
SSC			
Max Hold	Off		
Mark Line1	Off, 1.495 GHz		
Mark Line2	Off, 1.505 GHz		
Pass/Fail	Off		
Signal	1		
Ampt Up	-10 dBm		
Ampt Down	-100 dBm		
Marker			
Selected Marker	Marker1	Marker1	Marker1
Marker Mode	Position	Position	Position
Reference Marker	Marker2	Marker2	Marker2
Marker Trace	Trace1	Trace1	--
Marker Trace Auto	On	On	
Marker Freq	1.5 GHz	1.5 GHz	15.9730 ms
Marker Readout	Frequency	Frequency	--
Readout Auto	On	On	--
Line State	Off	Off	Off
Couple Markers	Off	Off	Off
Marker Table	Off	Off	Off
Peak			
Cont Peak	Off	Off	
Pk-Pk Search	Maximum Value	Maximum Value	
Peak Threshold	On, -90 dBm	On, -90 dBm	
Peak Excursion	On, 6 dB	On, 6 dB	
Threshold Line	Off	Off	
Peak Table	Off	Off	

Peak Table Sort	Amplitude	Amplitude	
Table Readout	All	All	
Display Line	-25 dBm	-25 dBm	
Marker Func			
N dB Bandwidth	Off, -3.01 dB	Off, -3.01 dB	--
Band Function	Off	Off	Off
Marker Counter	Off	--	--
Gate Time	On, 100 ms	--	--
System^[3]			
Power On	Preset	Preset	
Preset Type	Default	Default	
Align Auto	Off	Off	
LAN Setting Mode	DHCP	DHCP	
Display Line	Off, -25 dBm	Off, -25 dBm	
Graticule	On	On	
HDMI	On	On	
HDMI Resolution	1280*720 60Hz	1280*720 60Hz	
LCD	On	On	
LCD Backlight	100%	100%	
Power Switch	Default	Default	
Beep Switch	Off	Off	
Volume	50	50	
SCPI Display	On	On	
User key	Off	Off	
Language	English	English	

Note^[1]: This function is only available for RSA3030E-TG/RSA3015E-TG working in GPSA mode.

Note^[2]: This function is only available for RSA3000E installed with the corresponding option.

Note^[3]: Not affected by Preset settings.

Parameter Name	EMI Parameter Value
FREQ	
Frequency(Meter)	515 MHz
Midspan Freq	515 MHz
Start Freq	Auto, 30 MHz
Stop Freq	Auto, 1 GHz
Scale Type	Log
SPAN	
Span	970 MHz
AMPT	
Ref Level	106.99 dBuV
Att(Meter)	10 dB
RF Preamp(Meter)	Off
Y Axis Unit	dBuV
Scale/Div	10 dB
Ref Offset	0 dB
BW	
RBW(Meter)	Auto, 120 kHz
Filter Type(Meter)	EMI
Trigger	
Trigger Source	Free Run
Trigger Hold-off	Off, 100 ms
Auto Trig	Off, 100 ms
Slope	Positive
Trigger Delay	Off, 1 us
Trace	
Selected Trace	Trace1
Trace Type	Clear Write
Trace Det	Pos Peak
Detector Auto	On
Trace Update	On
Trace Display	On
Mode Setup	
Global CF Mode	Off, 515 MHz
EMC Standard	CISPR
Select Meter	Meter1
Meter	On
Detector	Pos Peak
Limit State	Off, 80 dBuV
Dwell Time	10 ms
Peak Hold Type	Infinite
Adjust Time	2 s
Couple to Signal	Off
Couple to Marker	Off
Meas Setup	
Swept SA Measurement	
Avg Number	1
Avg Type	Scalar
Avg Auto	Auto
Test Limits	Off
Select Limit	Limit1
Limit State	Off
Test Trace	Trace1
X to CF	Fixed
Y to Ref	Fixed

Margin	Off, 0 dB
Freq Interpolation	Linear
Frequency	0 Hz
Amplitude	106.99 dBuV
Build From	Trace1
Copy From	Limit1
X Offset	0 Hz
Y Offset	0 dB
Select Signal	1
Delete	Selected
Sort Signals	Frequency
Sort Order	Ascend
Auto Sort	On
Search Criteria	Peak Criteria
Peak Num	On, 25
Subrange Num	25
Select Range	Range5
Range	On
Start Freq	600 MHz
Stop Freq	1 GHz
Points	6667
Scan Time	On, 544.117 ms
RBW	On, 120 kHz
Filter Type	EMI
Attenuation	On, 10 dB
RF Preamp	Off
Scan Table	Off
Scan Sequence	Scan Only
(Re)measure	Curr Signal
Select Detector	Detector 1
Dwell Time	200 ms
Detector	Pos Peak
Limit for Delta	Limit 1
Marker	
Selected Marker	Marker 1
Marker Mode	Position
Reference Marker	Marker 2
Marker Trace	Trace 1
Marker Frequency	515 MHz
Line State	Off
Couple Markers	Off
Peak	
Peak Threshold	On, 16.99 dBuV
Peak Excursion	On, 6 dB
Threshold Line	Off
Search Mode	Max
Marker Func	
Selected Marker	Marker 1
Select Detector	Detector 1
Dwell Time	200 ms
Detector	Pos Peak
Limit for Delta	Limit 1
Meas at Mkr Win	Off
System^[1]	
Power On	Preset

Preset Type	Default
Align Auto	On
LAN Setting Mode	DHCP
Display Line	Off, 81.99 dBuV
Graticule	On
HDMI	On
HDMI Resolution	1280*720 60Hz
LCD	On
LCD Backlight	100%
Meters Display	On
Meters Freq Line	On
Next Range Display	Off
Power Switch	Default
Beep Switch	Off
Volume	50
SCPI Display	On
User key	Off
Language	English

Note^[1]: Not affected by Preset settings.

Parameter Name	VSA Parameter Value
FREQ	
Center Freq	1 GHz
Start Freq	998.4375 MHz
Stop Freq	1.0015625 GHz
CF Step	Auto, 312.5 kHz
SPAN	
X Scale	Auto
Ref Value	0 sym
Width	50 sym
AMPT	
Ref Value	0
Scale/Div	300m
Range	20 dBm
Y Axis Unit	Peak
Copy Y Scale	To Trace1
BW	
FFT Window	Flat Top
Trigger	
Trigger Source	Free Run
Slope	Positive
Trigger Delay	Off, 1 us
Power	0 dBm
Trigger Hold-off	Off, 100 ms
Auto Trig	Off, 100 ms
Mask Type	Upper
Trigger Mask	Upper
Trigger Criteria	Enter
Active Mask	Upper
Frequency	999.68403 MHz
Amplitude	0 dB
X Offset	0 Hz
Y Offset	0 dB
X Axis Type	Fixed
Y Axis Type	Fixed
Trace	
Selected Trace	Trace 1
Capture Data	Time Domain
Trace Format	I-Q
Eye Length	2
Symbol Format	Binary
Trace Det	Pos Peak
Mode Setup	
Global CF	On, 1 GHz
Meas	
Measurement Function	Digital Demod
Meas Setup	
Mod Format	2FSK
Ref Deviation Mode	Auto
Ref Deviation	1 kHz
Meas Interval	50
Points/Symbol	4
Symbol Rate	1 MHz
Meas Filter	RRC

Ref Filter	Raised Cosine
Alpha/BT	0.22
Burst Search Length	50 us
Burst Search Run-In	0
Burst Search	Off
Sync Analyze Length	50
Sync Search	Off
Sync Offset	0
Window Layout	Four Window
Marker	
Selected Marker	Marker 1
Marker Mode	Position
Reference Marker	Marker 2
Marker Trace	Trace1
Couple Markers	Off
Marker Table	Off
Marker X	25 symbol
Peak	
Cont Peak	Off
Marker Func	
Band Function	Off
Band Span	150 MHz
System^[1]	
Power On	Preset
Preset Type	Default
Align Auto	On
LAN Setting Mode	DHCP
Graticule	On
HDMI	On
HDMI Resolution	1280*720 60Hz
LCD	On
LCD Backlight	100%
Power Switch	Default
Beep Switch	Off
Volume	50
SCPI Display	On
User key	Off
Language	English

Note^[1]: Not affected by Preset settings.

Appendix B: Warranty

RIGOL TECHNOLOGIES CO., LTD. (hereinafter referred to as **RIGOL**) warrants that the product mainframe and product accessories will be free from defects in materials and workmanship within the warranty period. If a product proves defective within the warranty period, **RIGOL** guarantees free replacement or repair for the defective product.

To get repair service, please contact your nearest RIGOL sales or service office.

There is no other warranty, expressed or implied, except such as is expressly set forth herein or other applicable warranty card. There is no implied warranty of merchantability or fitness for a particular purpose. Under no circumstances shall **RIGOL** be liable for any consequential, indirect, ensuing, or special damages for any breach of warranty in any case.