


CTOL

976 Series

Multichannel Tactical Optical Connector

MAIN CHARACTERISTICS

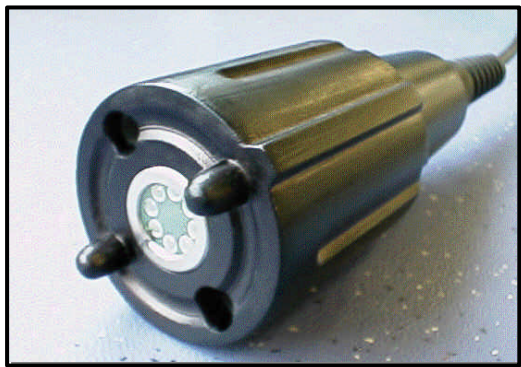

This product offers a very robust (\varnothing 51 mm), up to 8 channels and easy to mate optical connection that allows for rapid deployment of high speed transmission

links in adverse environments.

The specific design of the lenses guarantees a large beam diameter and a low loss connection insensitive to dust and dirt. Ergonomic keys allow for blind mating. The CTOL harnesses are easy to maintain on the field with the FTOS splice kit.

Technical description

- 2, 4 or 8 channel Plugs and Receptacles diam 51 mm and Tactical Harnesses and Test caps for maintenance
- Hermaphroditic interface with rapid ramp coupling
- 2, 4 and 8 channel products are intermateable
- Large expanded beams with protective windows
- Stainless steel body with ergonomic rubber shell
- Typical Insertion Loss : 1.5 dB @ 1300 nm 50/125 fiber single mode possible (*contact us*)
- Durability : 10 000 mating/unmating cycles
- Operating Temperature : -40°C, +85°C
- Vibrations : 10 to 2000Hz, 10g, 1.5 mmp/p, 3 directions
- Bumps : 4000 Bumps, 40g, 6ms, 6 directions
- Mechanical shock : 50g, ½ sinus, 3 shocks by direction, 3 axes
- Free drops : 26 drops 1.2m on plywood/concrete
- Water immersion : > 1m depth
- Salt spray : 500 hours
- Mud Resistance : MIL C 83526/13
- Low pressure : 85 mbars 48 hours
- Termination, Maintenance accessories and tool kits available

Features

The Amphenol CTOL Fibre Optic expanded beam connector is Nato approved and complies to the Stanag 4290 that defines an interoperable optical tactical interface.

The flat protective windows mounted on shock absorbers provide a connector interface easy to clean on the field to improve performance and protection.

Applications

- Army, Navy and Airforce optical networks
- EMI insensitive and light tactical transmission links
- Long distance
- Radar deployment systems

Amphenol

Amphenol Socapex Promenade de l'Arve-B.P.29 - 74311 THYEZ - FRANCE - Tel. :33 (0) 4 50 89 28 53 - Fax : 33 (0) 4 50 89 28 23


Specifications are subject to change without notice. All statements, information and data system given herein are believed to be accurate and reliable but are presented without warranty. No reproduction without agreement. CTOL. May 2000. Printed in France by Amphenol Socapex.

CTOL


976 Series

Line Drawings (dimensions in mm)


CTOL plug with protective cap

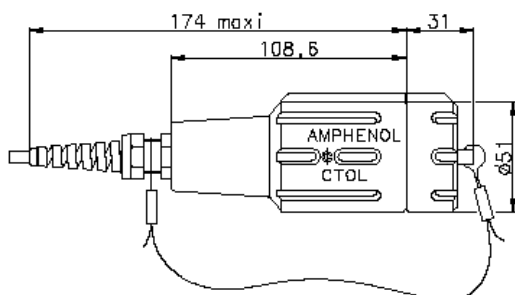

CTOL plug to plug

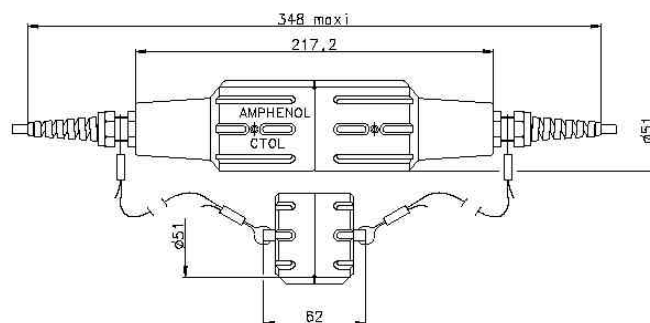

CTOL jam nut receptacle – rear mount

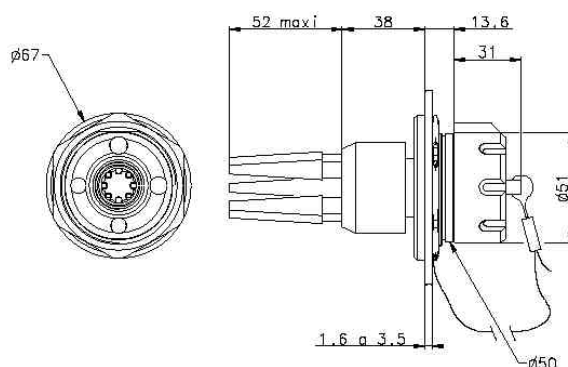

How to order :

CTOL - XXX - XX - X - XX - X - XXX - XXX

CTOL : 976 series

- Plug for tactical cable : 06M
- Jam nut receptacle for pig-tails : 77P
- Jam nut receptacle for tactical cable : 77M

Straight backshell : 00

Number of channel
2 channels : 2 4 channels : 4 8 channels : 8

BPF : Cap for plug
BPE : Cap for Jam
Nut Receptacle

All cables are tight jacket.

28 : O.D. patchcord 2.8 mm

55 : O.D. tactical 5.5 mm

75 : O.D. tactical 7.5 mm

Other cables possible.

Y : Wavelength 1300 nm

Z : Wavelength 840 – 1300 nm

01 : 50/125 μ m

02 : 62.5/125 μ m

Amphenol

Amphenol Socapex Promenade de l'Arve-B.P.29 - 74311 THYEZ - FRANCE - Tel. :33 (0) 4 50 89 28 53 - Fax : 33 (0) 4 50 89 28 23

Specifications are subject to change without notice. All statements, information and data system given herein are believed to be accurate and reliable but are presented without warranty. No reproduction without agreement. CTOL. May 2000. Printed in France by Amphenol Socapex.