


KDE-W50A10

SERVICE MANUAL

Korea Model

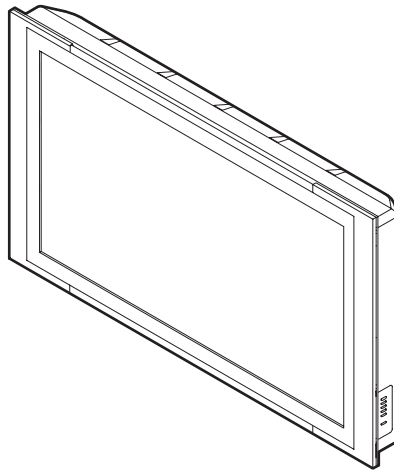

XS2 CHASSIS

SPECIFICATIONS

Panel System	Plasma Display panel	
Display resolution	KDE-W50A10	1365 pixels (horizontal) × 768 pixels (vertical)
Antenna	75-ohm external terminal for VHF/UHF	
Television System	NTSC	American TV Standard
	ATSC (8VSB terrestrial)	ATSC compliant 8VSB
	QAM on cable	ITU-T J.83 Annex B compliant 64/256 QAM
Channel Coverage	Terrestrial (analog)	2-69
	Cable TV (analog)	1-125
	Terrestrial (digital)	2-69
	Cable TV (digital)	1-135
Power Requirements	220V, 60 Hz	

Plasma TV
SONY®

Inputs/Outputs		
HDMI IN	Video	1080i, 720p, 480p, 480i
	Audio	Two channel linear PCM 32, 44.1 and 48 kHz, 16, 20 and 24 bits
Video (IN)	3 total (1 on left side panel)	1 Vp-p, 75 ohms unbalanced, sync negative
S Video (IN)	3 total (1 on left side panel)	Y: 1 Vp-p, 75 ohms unbalanced, sync negative C: 0.286 Vp-p (Burst signal), 75 ohms
Audio (IN)	5 total (1 on left side panel)	500 mVrms (100% modulation) Impedance: 47 kilohms
Component Video Input	2 (Y, PB, PR)	Y: 1.0 Vp-p, 75 ohms unbalanced, sync negative; PB: 0.7 Vp-p, 75 ohms PR: 0.7 Vp-p, 75 ohms
CONTROL S (IN)	1	Mini jack
CONTROL S (OUT)	1	Mini jack
Digital Audio Optical Output (PCM/Dolby Digital)	1	Optical rectangular (1)
Variable/Fixed Audio (OUT)	1	More than 408 mVrms at the maximum volume setting (Variable) More than 408 mVrms (Fixed) Impedance (output): 2 kilohms
Sub woofer (OUT)	1	Phono jack
Screen Size (measured diagonally)	KDE-W50A10	50 inches
Speaker Output	25 W × 2 + 50 W woofer	
CENTER SPEAKER IN	Max. 180 W (6 Ω), 1 kHz, Sensitivity 30 Vp-p	
Dimensions (W × H × D)	KDE-W50A10	1336 × 789 × 89 mm
Mass	KDE-W50A10	54.0 kg
Power Consumption	In Use	KDE-W50A10: 430 W
	In Standby	0.5 W
Supplied Accessories	Remote Control (1)	RM-KA002
	AA (R6) Batteries (2)	
	AC power cord (1)	
	AC plug holder (1)	
	75-ohm coaxial RF cable (1)	
	AC cord clamp (1)	
	Cleaning Cloth (1)	
	Operating Instructions (1)	
	Quick Setup Guide (1)	
	Warranty Card (1)	

Design and specifications are subject to change without notice.

SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety checks before releasing the set to the customer:


1. Check the area of your repair for unsoldered or poorly-soldered connections. Check the entire board surface for solder splashes and bridges.
2. Check the interboard wiring to ensure that no wires are “pinched” or contact high-wattage resistors.
3. Check that all control knobs, shields, covers, ground straps, and mounting hardware have been replaced. Be absolutely certain that you have replaced all the insulators.
4. Look for unauthorized replacement parts, particularly transistors, that were installed during a previous repair. Point them out to the customer and recommend their replacement.
5. Look for parts which, though functioning, show obvious signs of deterioration. Point them out to the customer and recommend their replacement.
6. Check the line cords for cracks and abrasion. Recommend the replacement of any such line cord to the customer.
7. Check the antenna terminals, metal trim, “metallized” knobs, screws, and all other exposed metal parts for AC Leakage. Check leakage as described right.

LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5 mA (500 microamperes).

Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The “limit” indication is 0.75 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOMs that are suitable. Nearly all battery operated digital multimeters that have a 2 V AC range are suitable. (See Fig. A)

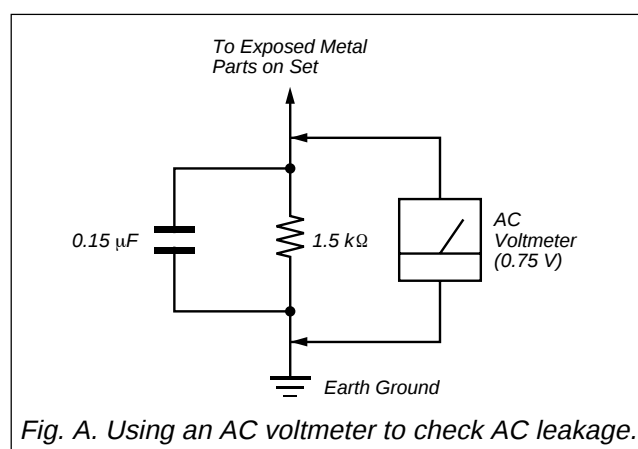

WARNING!!

SAFETY-RELATED COMPONENT WARNING!!
COMPONENTS IDENTIFIED BY SHADING AND MARK  ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL FOR SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY. CIRCUIT ADJUSTMENTS THAT ARE CRITICAL FOR SAFE OPERATION ARE IDENTIFIED IN THIS MANUAL. FOLLOW THESE PROCEDURES WHENEVER CRITICAL COMPONENTS ARE REPLACED OR IMPROPER OPERATION IS SUSPECTED.

AVERTISSEMENT!!

ATTENTION AUX COMPOSANTS RELATIFS À LA SÉCURITÉ!!
LES COMPOSANTS IDENTIFIÉS PAR UNE TRAME ET UNE MARQUE ! SONT CRITIQUES POUR LA SÉCURITÉ. NE LES REMPLACER QUE PAR UNE PIÈCE PORTANT LE NUMÉRO SPECIFIÉ. LES RÉGLAGES DE CIRCUIT DONT L'IMPORTANCE EST CRITIQUE POUR LA SÉCURITÉ DU FONCTIONNEMENT SONT IDENTIFIÉS DANS LE PRÉSENT MANUEL. SUIVRE CES PROCÉDURES LORS DE CHAQUE REMPLACEMENT DE COMPOSANTS CRITIQUES, OU LORSQU'UN MAUVAIS FONCTIONNEMENT EST SUSPECTÉ.


TABLE OF CONTENTS

1. DISASSEMBLY	1-1	4-2. FRAME DIAGRAMS	4-13
1-1. SERVICE POSITION	1-1	4-3. CIRCUIT BOARDS LOCATION	4-14
1-1-1. PANELS AND CAP REMOVAL	1-1	4-4. SCHEMATIC DIAGRAMS AND	
1-1-2. WOOFER BLOCK REMOVAL	1-1	PRINTED WIRING BOARDS	4-14
1-1-3. REAR COVER ASSY REMOVAL	1-1	(1) Schematic Diagrams of A1U Board	4-15
1-2. STAND, WOOFER BLOCK ASSY REMOVAL		(2) Schematic Diagrams of A2NU Board	4-19
.....	1-2	(3) Schematic Diagram of F Board	4-22
1-3. REAR COVER REMOVAL	1-2	(4) Schematic Diagrams of G1 Board	4-23
1-4. TERMINAL BOARD AND POT COVER ASSY		(5) Schematic Diagrams of G2N Board	4-26
REMOVAL	1-3	(6) Schematic Diagram of H1U and H2 Boards	
1-5. QM AND QT BOARDS REMOVAL	1-3		4-29
1-6. DE3, DIC3, J1NU, J2NU AND M1U		(7) Schematic Diagram of H3 and H4 Boards	
BOARDS REMOVAL	1-4		4-30
1-7. A1U, A2NU AND P BOARDS REMOVAL	1-4	(8) Schematic Diagram of H5 Board	4-31
1-8. G1 AND G2N BOARDS REMOVAL	1-5	(9) Schematic Diagram of QH Board	4-32
1-9. F AND K BOARDS REMOVAL	1-5	4-5. SEMICONDUCTORS	4-33
1-10. H1U BOARD REMOVAL	1-6		
1-11. H2 AND QH BOARDS REMOVAL	1-6	5. EXPLODED VIEWS	5-1
1-12. PLASMA DISPLAY PANEL		5-1. REAR COVER ASSY AND STAND	5-2
ASSY REMOVAL	1-7	5-2. CHASSIS-1	5-3
1-13. H3 AND H4 BOARDS REMOVAL	1-8	5-3. CHASSIS-2	5-4
1-14. H5 BOARD REMOVAL	1-8	5-4. CHASSIS-3	5-5
		5-5. CHASSIS-4	5-6
2. TROUBLESHOOTING	2-1	5-6. PACKING MATERIALS	5-7
3. ADJUSTMENTS	3-1	6. ELECTRICAL PARTS LIST	6-1
3-1. SERVICE MODE	3-1		
3-2. SERVICE MODE LIST	3-1		
4. DIAGRAMS	4-1		
4-1. BLOCK DIAGRAMS	4-1		
(1) A1U AND H2 BOARDS	4-1		
(2) A2NU (1/2) AND J1NU BOARDS	4-2		
(3) A2NU (2/2), H4 AND J2NU BOARDS	4-3		
(4) DE3 BOARD	4-4		
(5) DIC3 BOARD	4-5		
(6) F AND G1 BOARDS	4-6		
(7) G2N BOARD	4-7		
(8) K BOARD	4-8		
(9) H1U, H3, H5 AND M1U BOARDS	4-9		
(10) P BOARD	4-10		
(11) QH AND QM BOARDS	4-11		
(12) QT BOARD	4-12		


SECTION 1 DISASSEMBLY

1-1. SERVICE POSITION


1-1-1. PANELS AND CAP REMOVAL

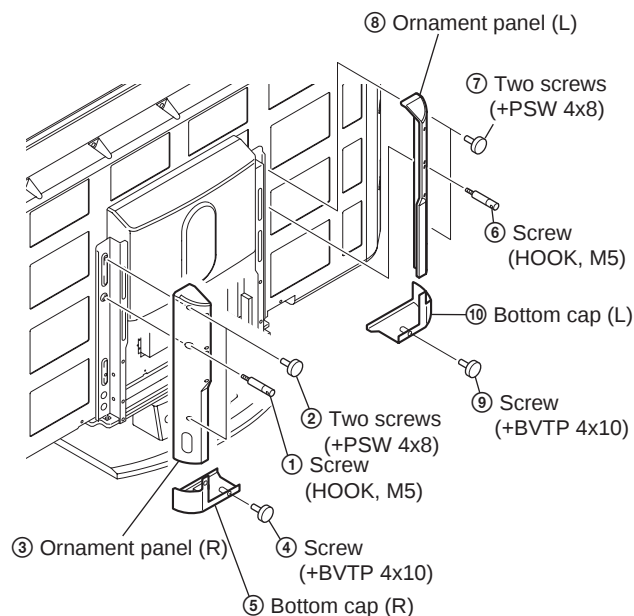


1-1-2. WOOFER BLOCK REMOVAL

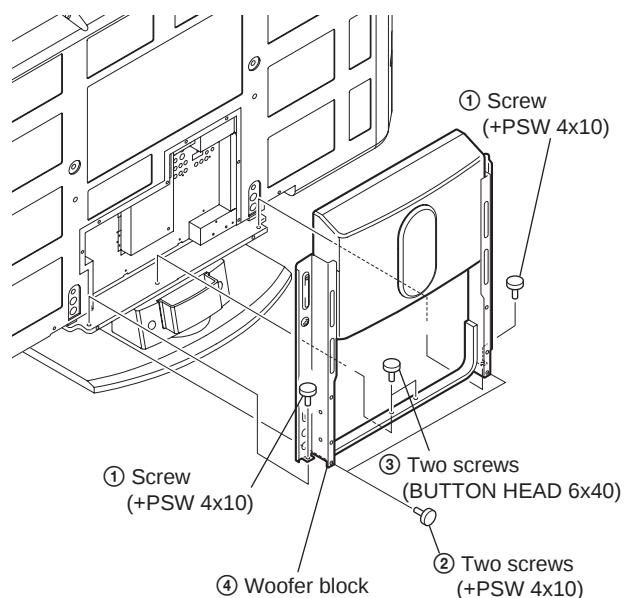


1-1-3. REAR COVER ASSY REMOVAL

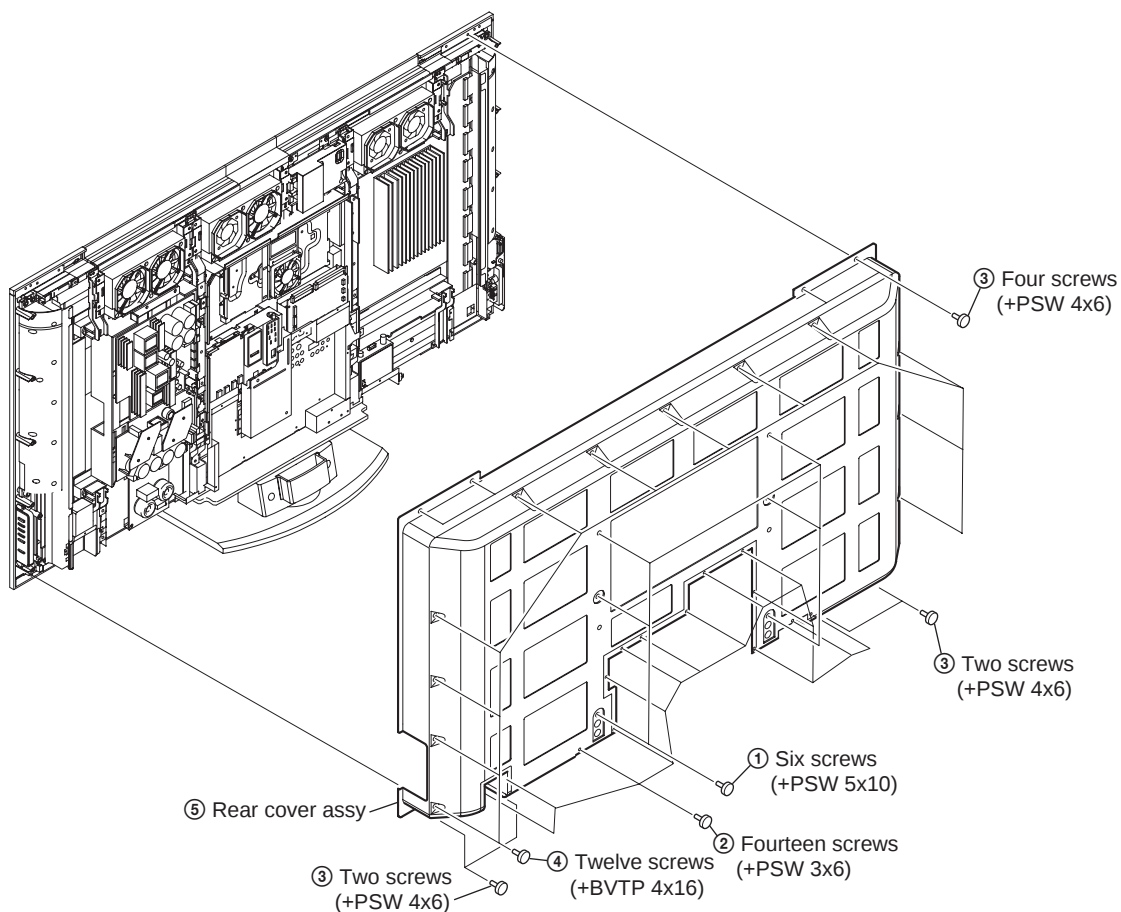


1-2. STAND AND WOOFER BLOCK ASSY REMOVAL

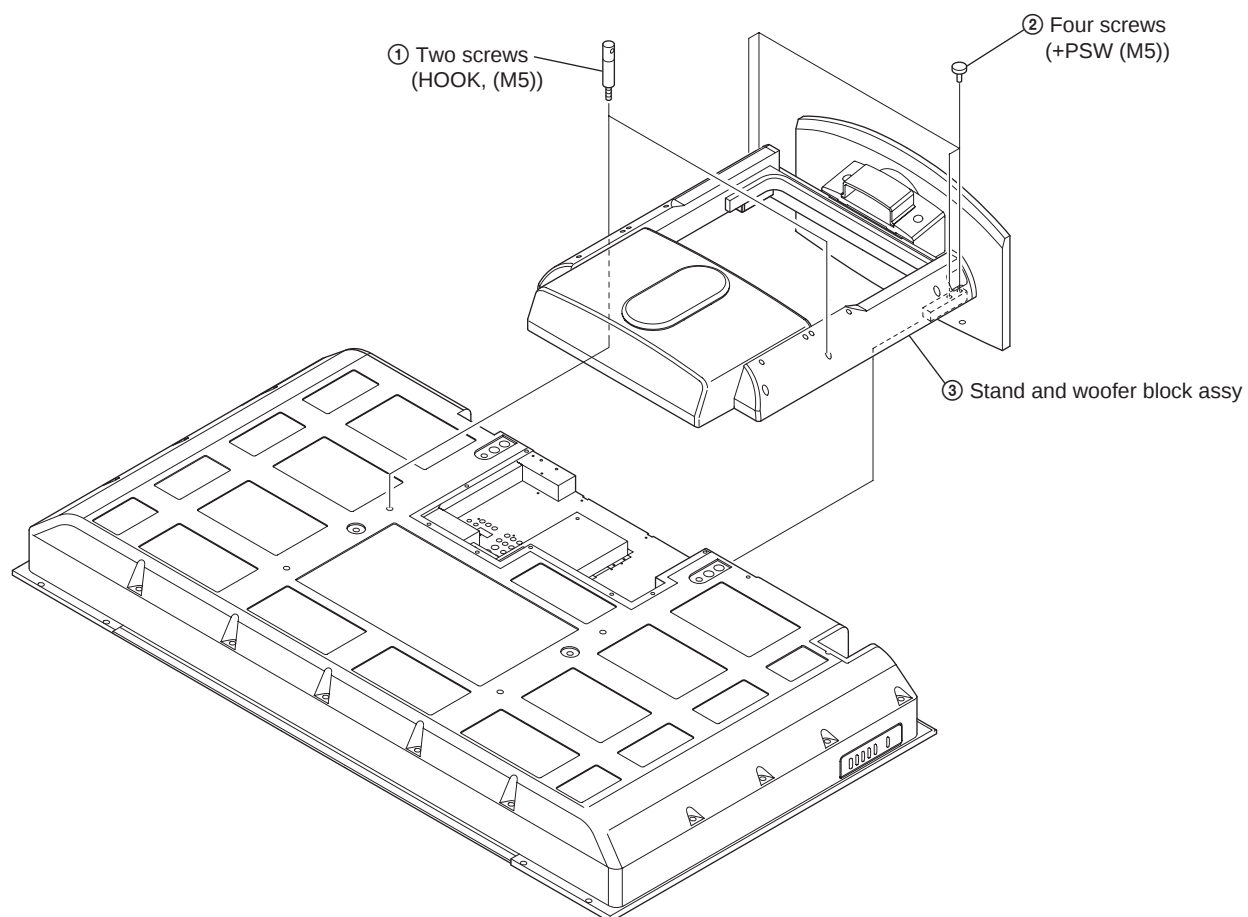


1-3. REAR COVER ASSY REMOVAL

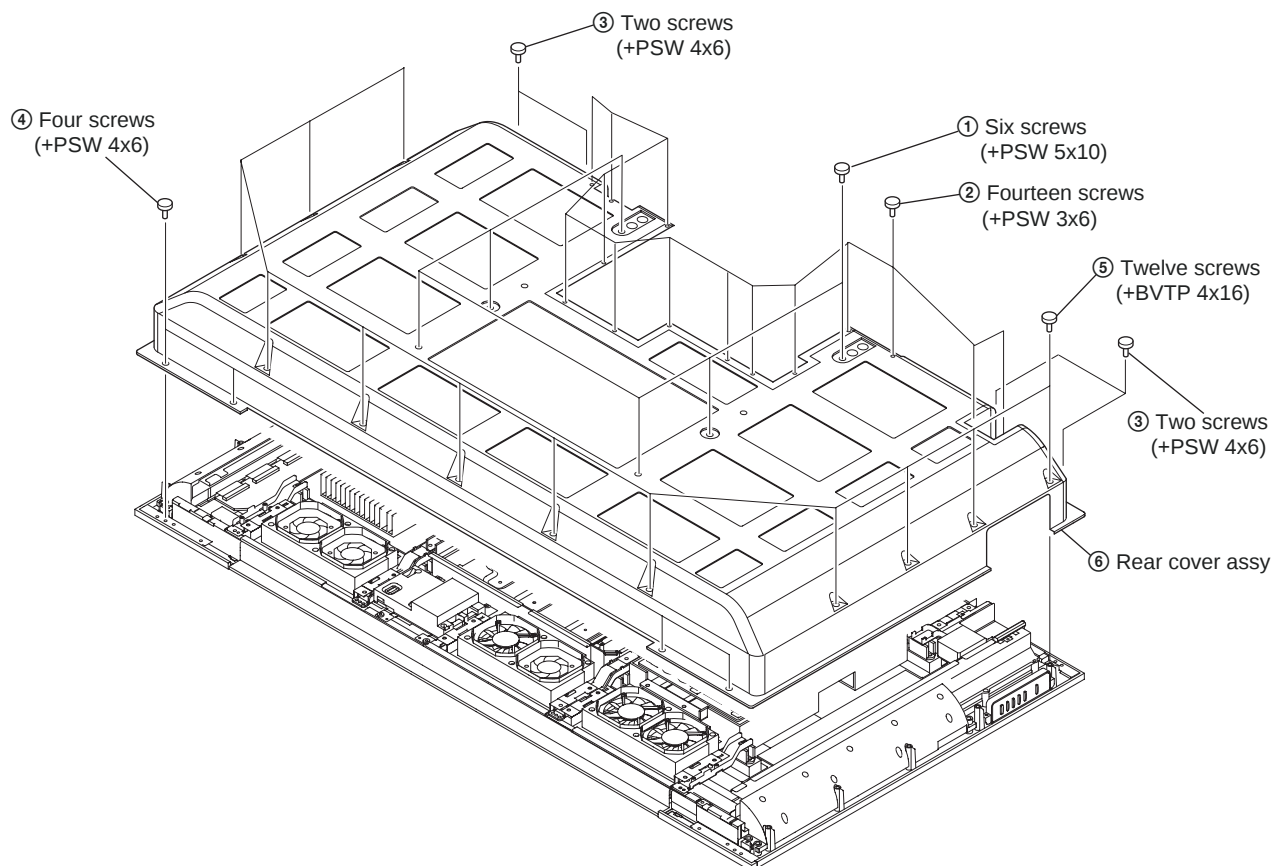


1-4. TERMINAL BOARD AND POT COVER ASSY REMOVAL

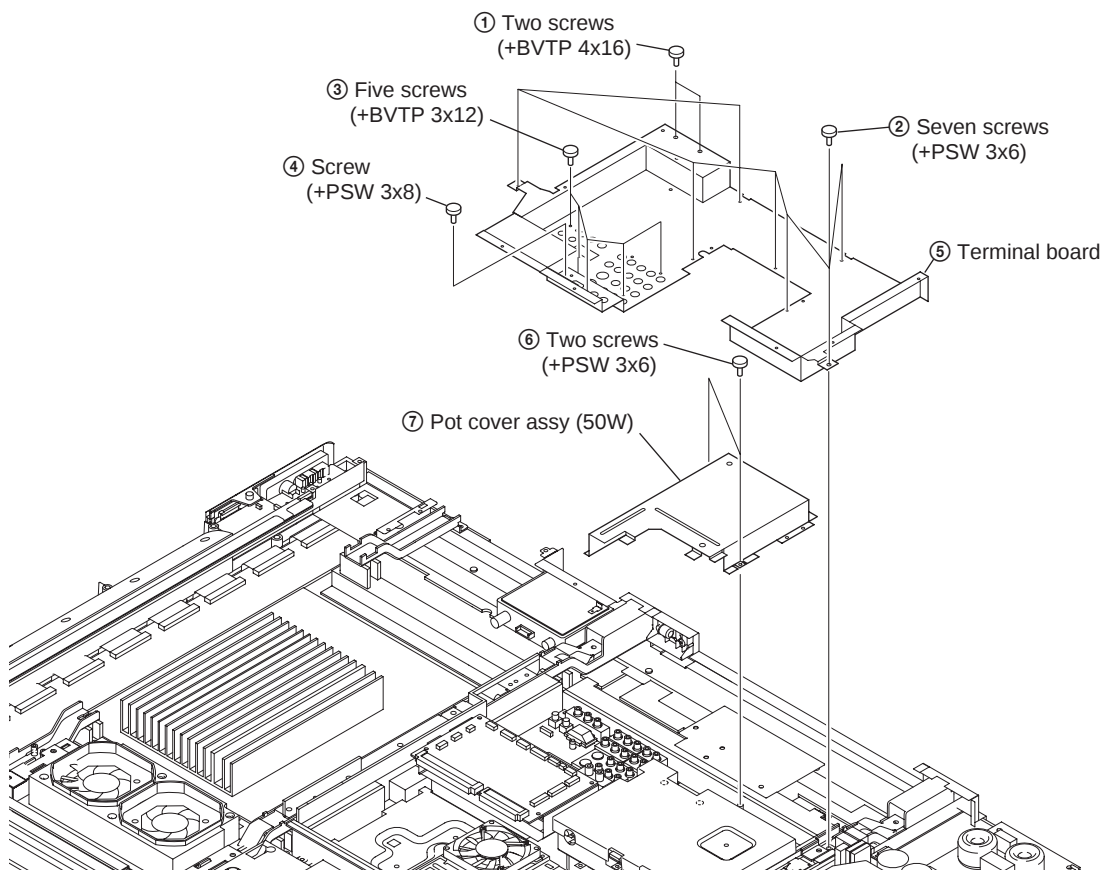


1-5. QM AND QT BOARDS REMOVAL

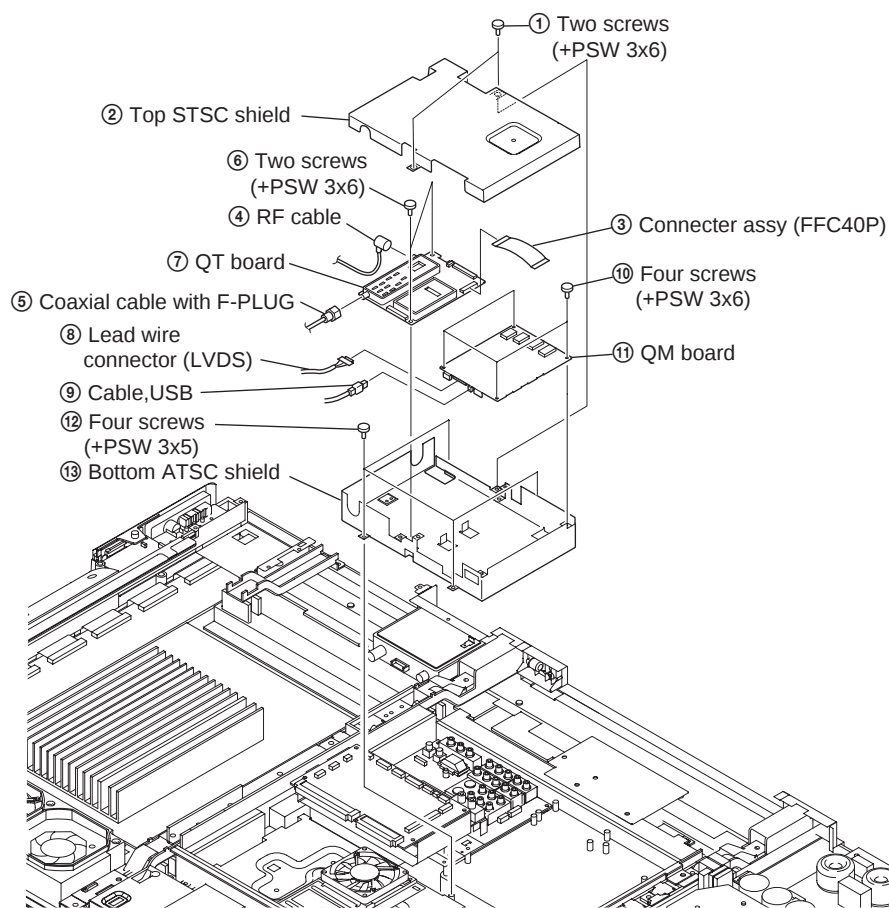


1-6. DE3, DIC3, J1NU, J2NU AND M1U BOARDS REMOVAL

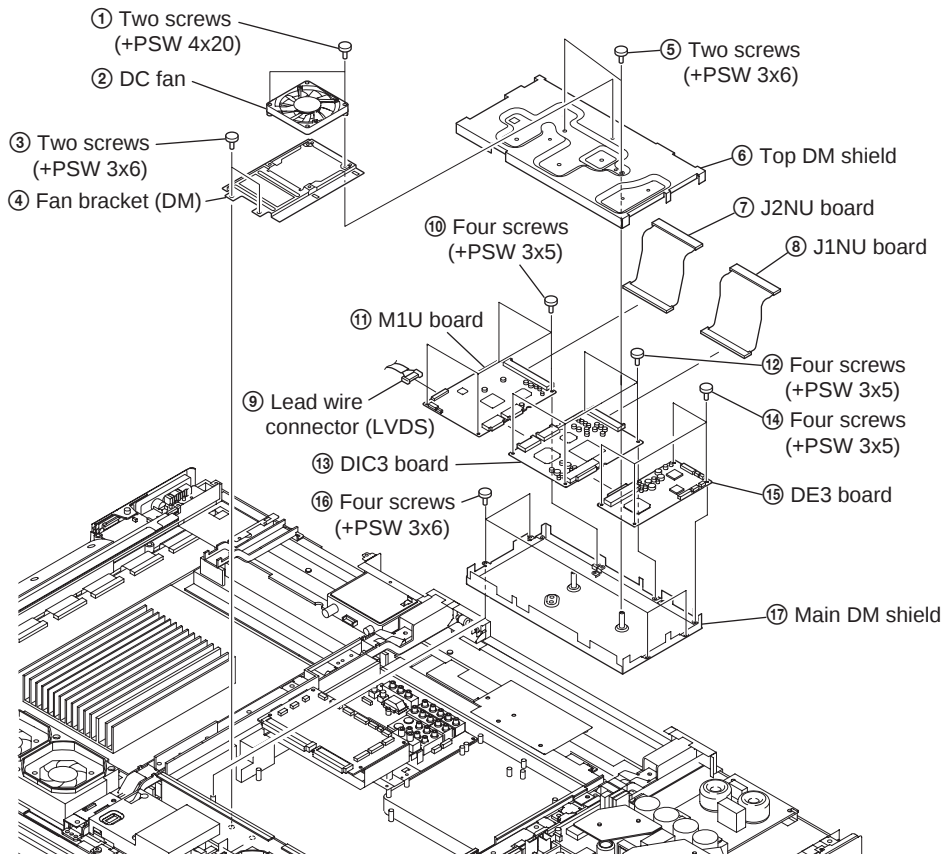


1-7. A1U, A2NU AND P BOARDS REMOVAL

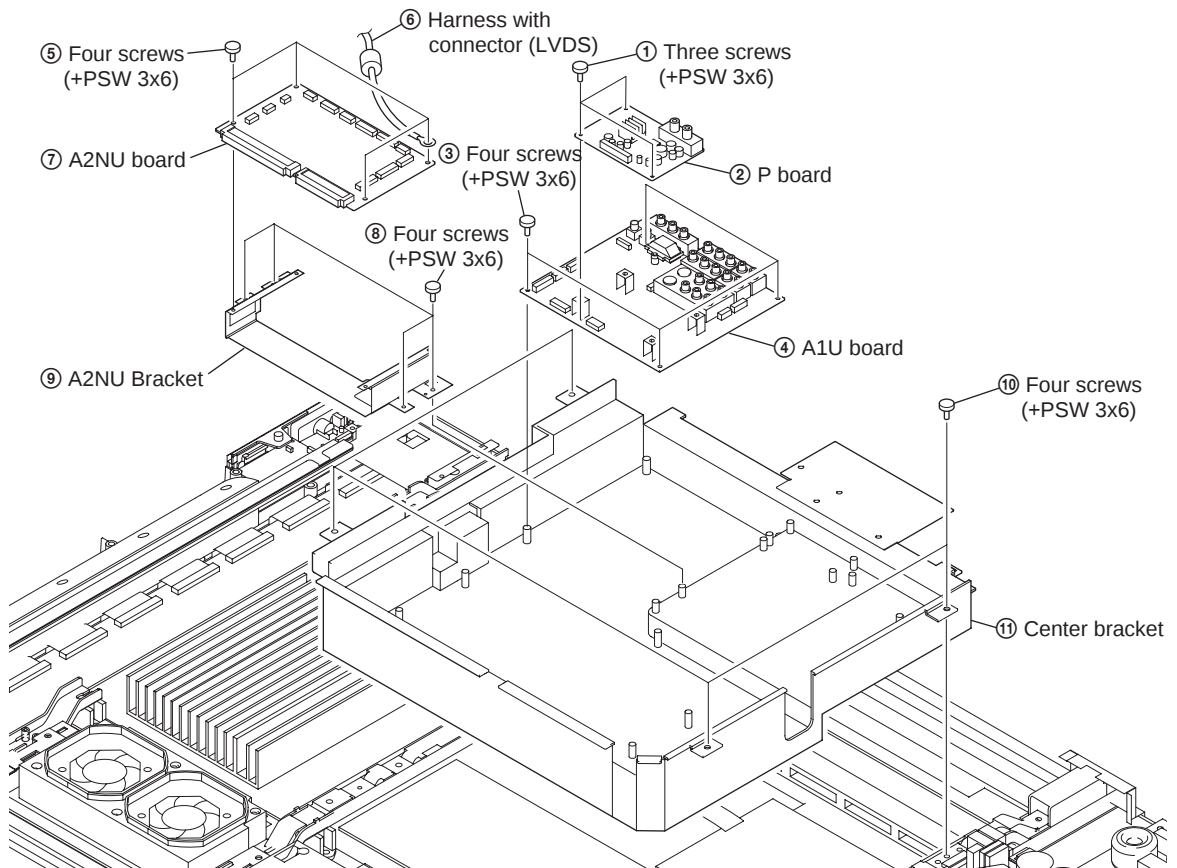


1-8. G1 AND G2N BOARDS REMOVAL

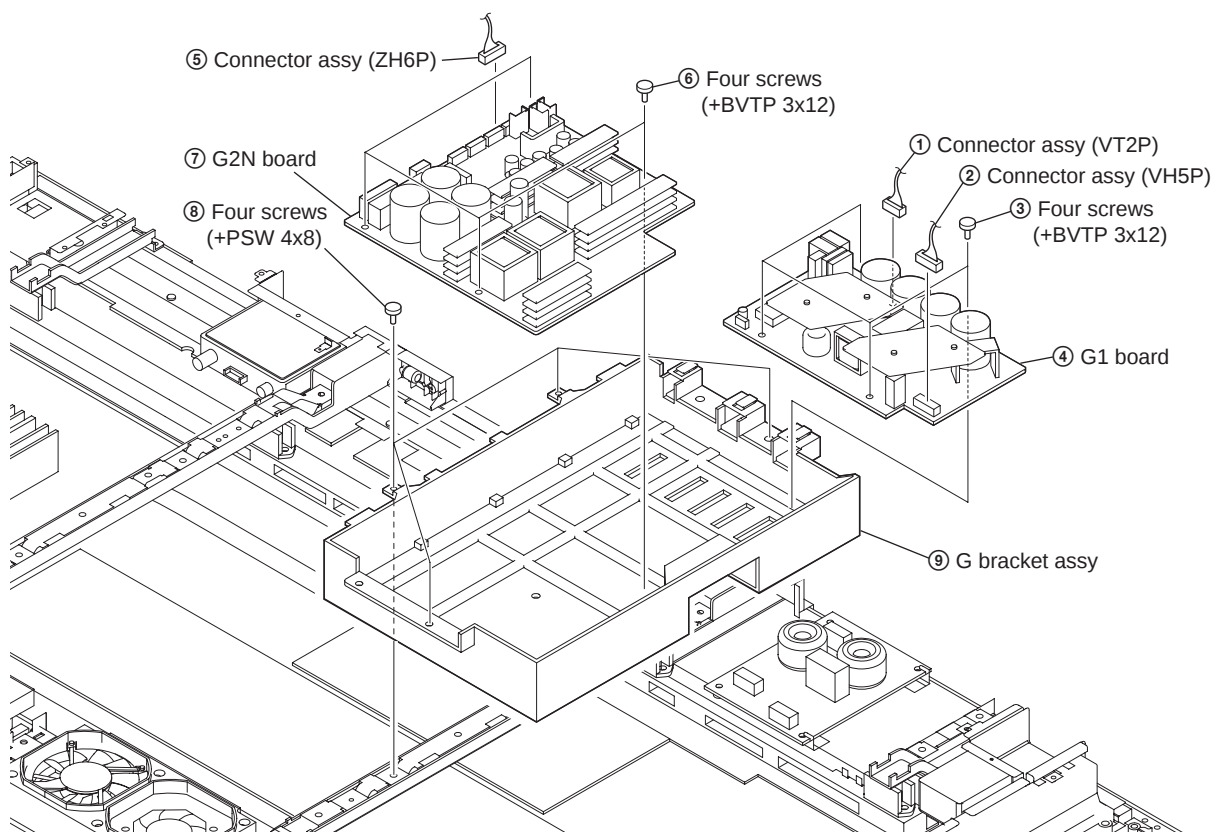


1-9. F AND K BOARDS REMOVAL

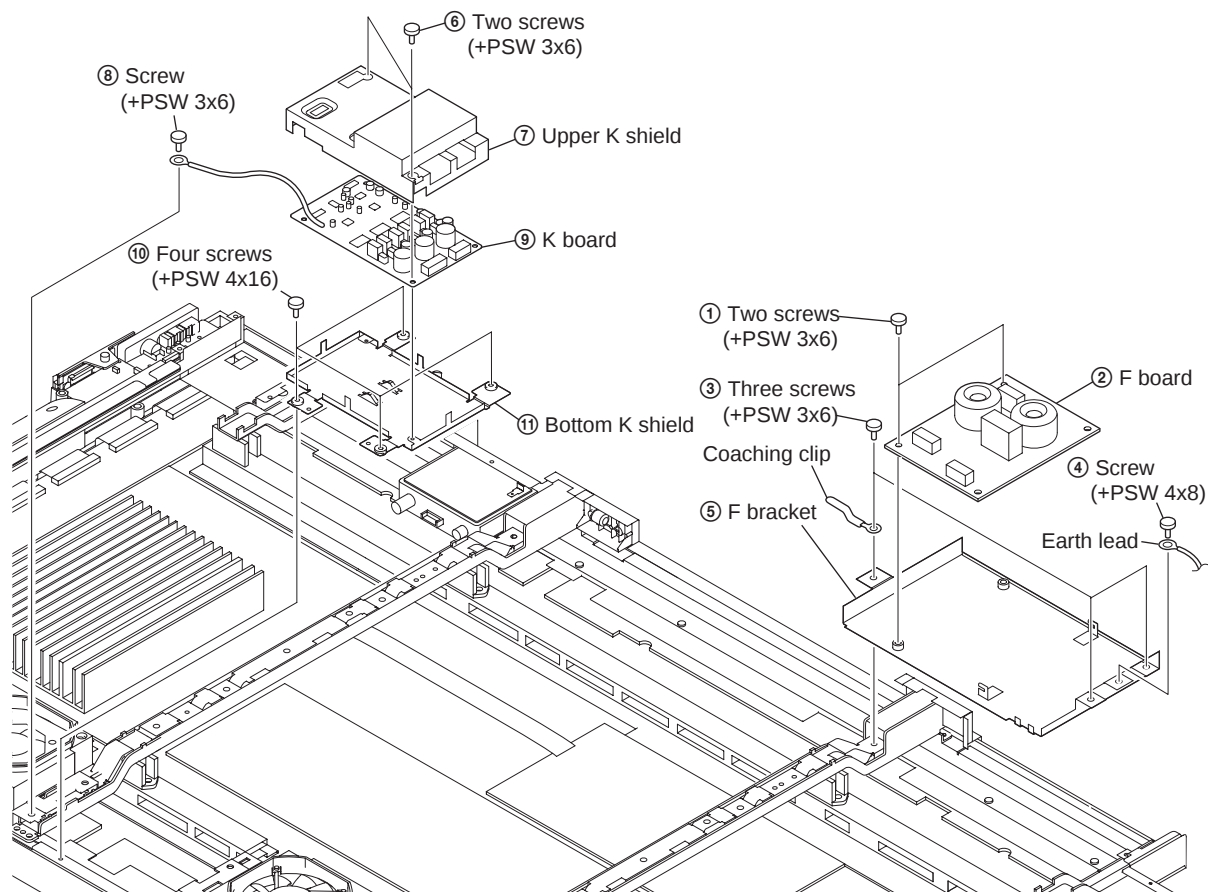


1-10. H1U BOARD REMOVAL

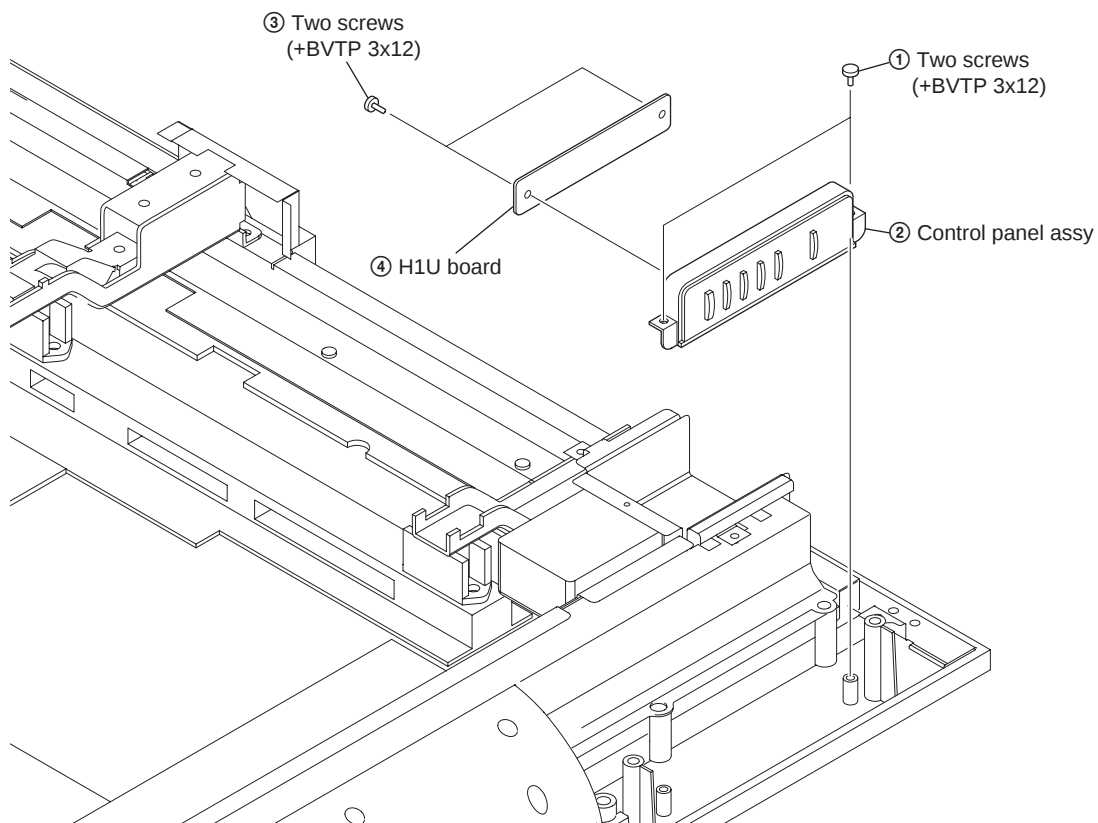


1-11. H2 AND QH BOARDS REMOVAL

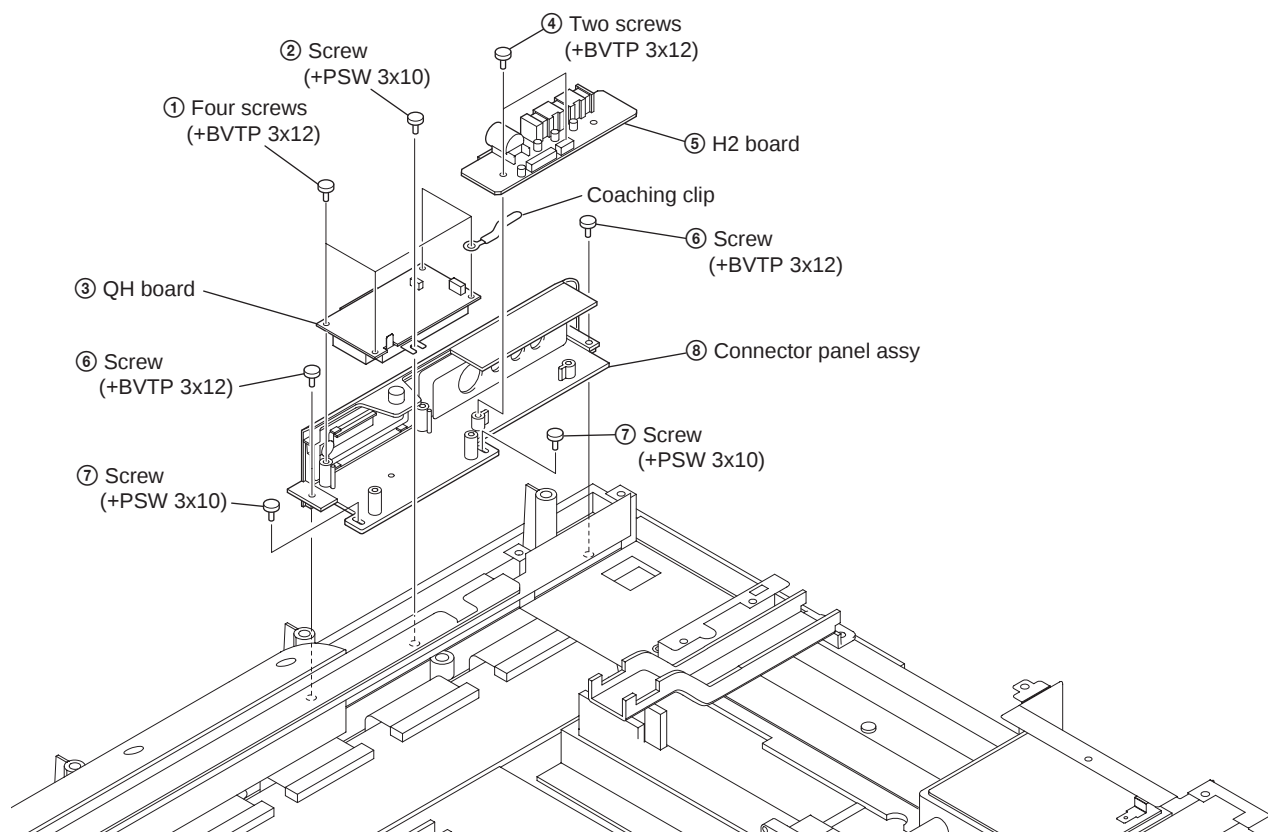


1-12. PLASMA DISPLAY PANEL ASSY REMOVAL

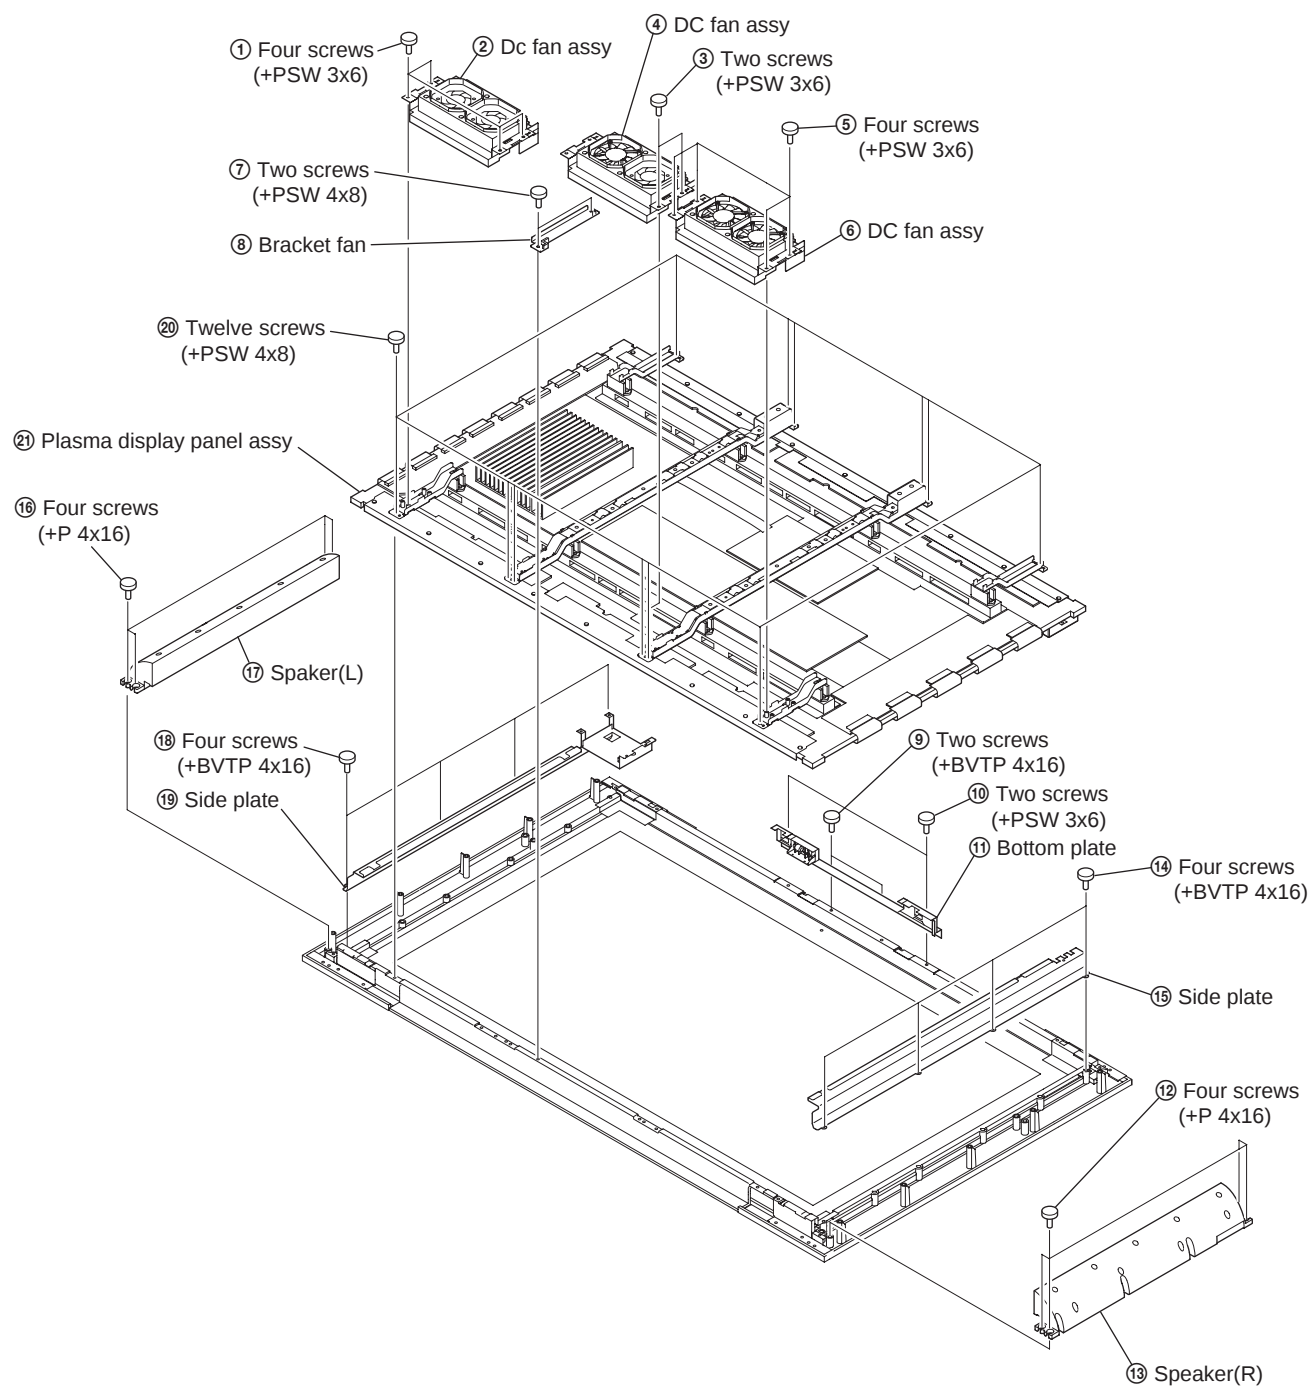

1-13. H3 AND H4 BOARDS REMOVAL

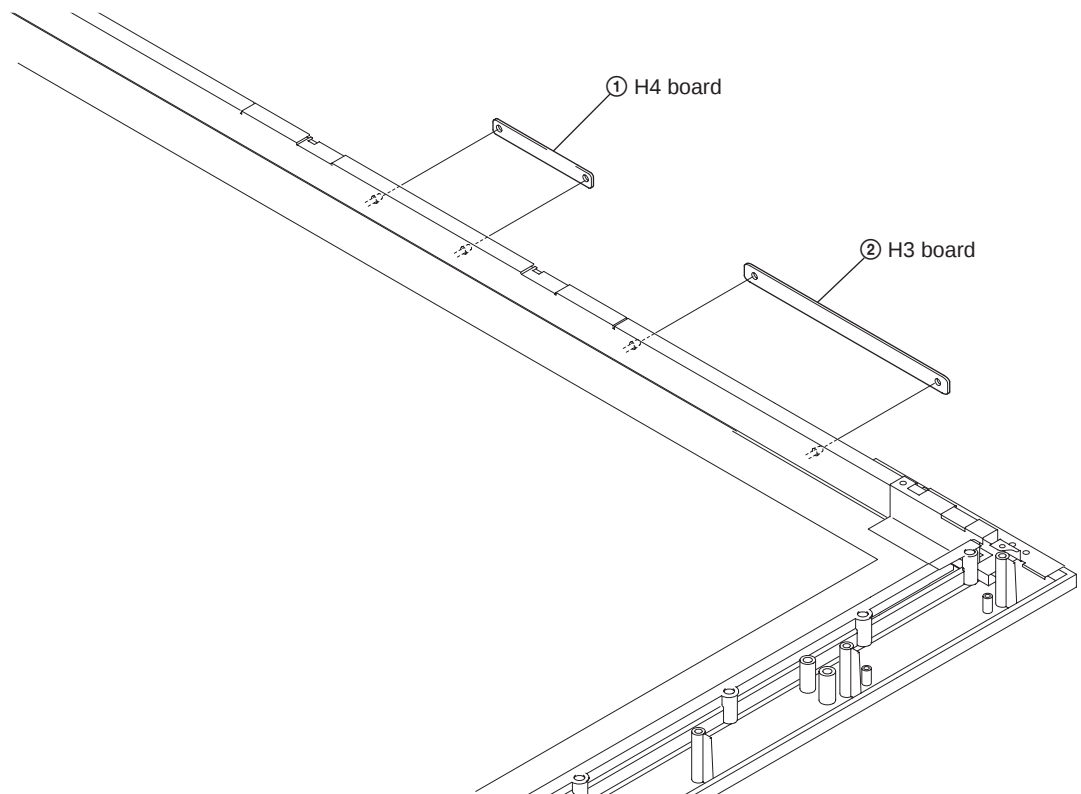


1-14. H5 BOARD REMOVAL

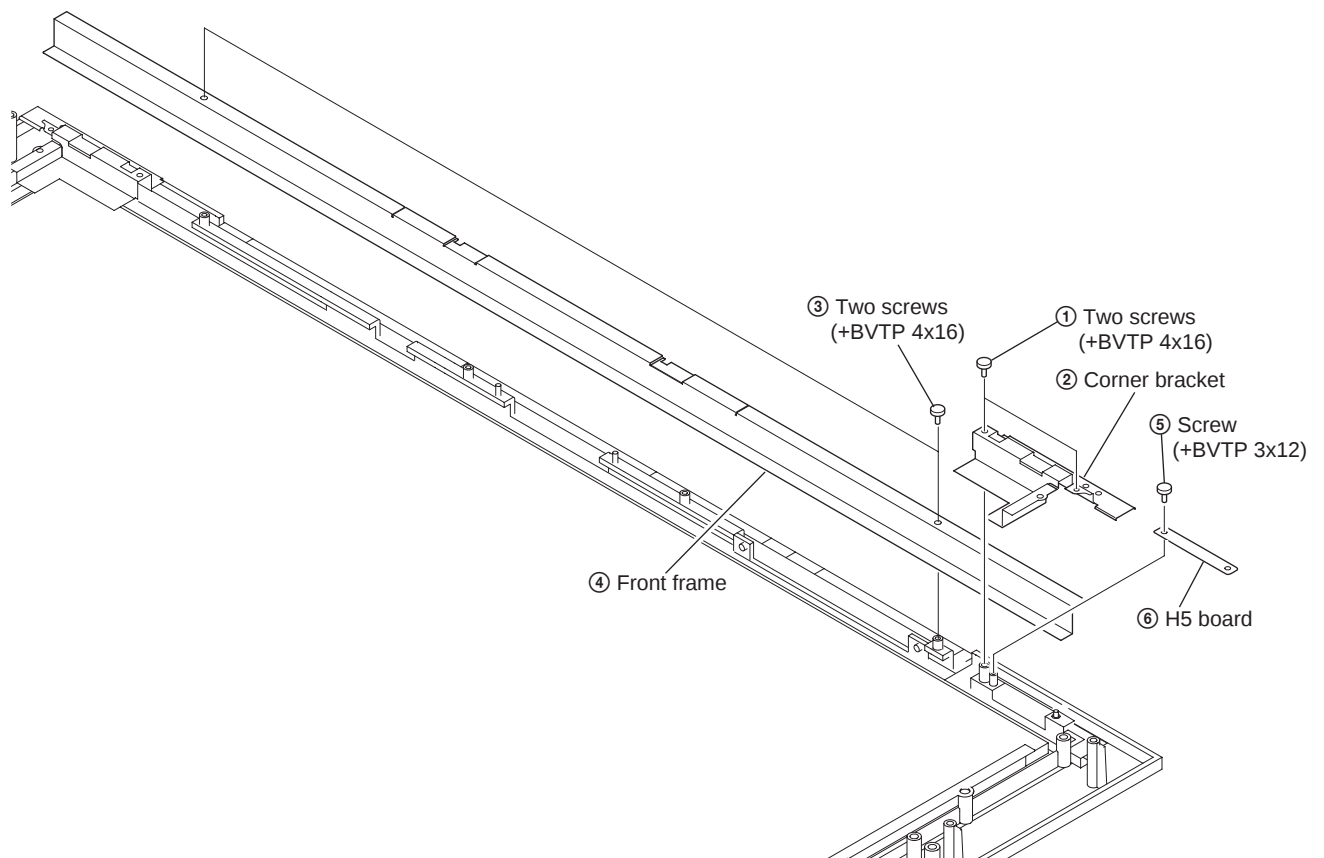


SECTION 2 TROUBLESHOOTING


POWER ON SEQUENCE for 50V

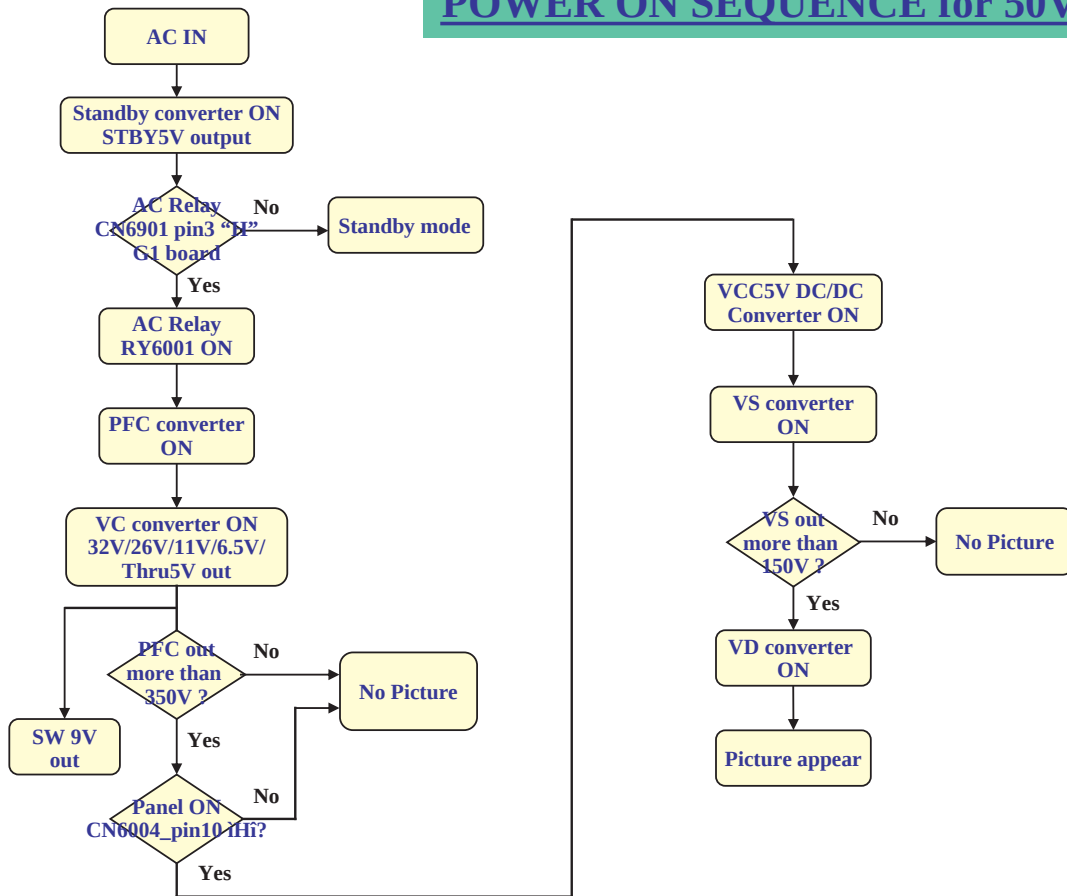


Power Supply Trouble shooting

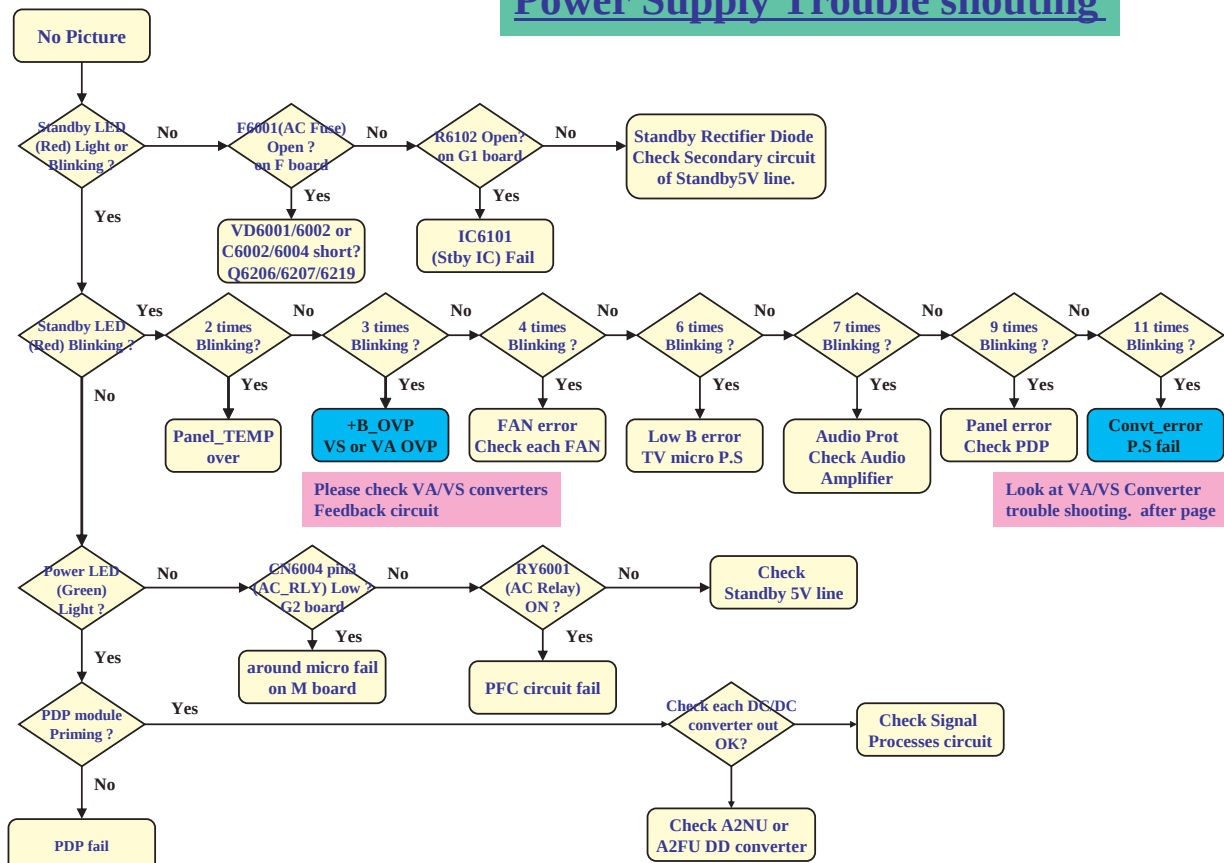

PFC converter trouble shooting

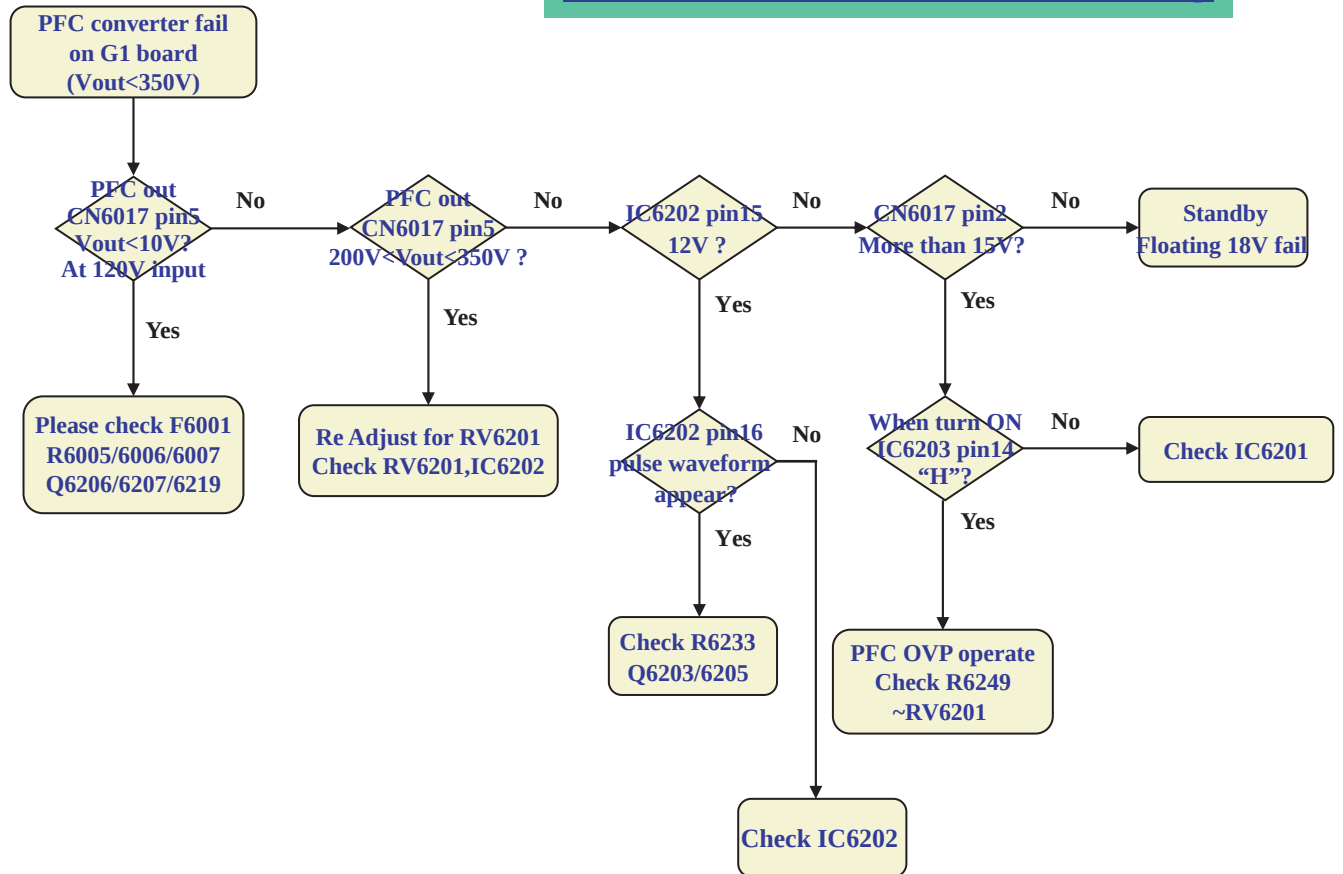


VC converter trouble shooting

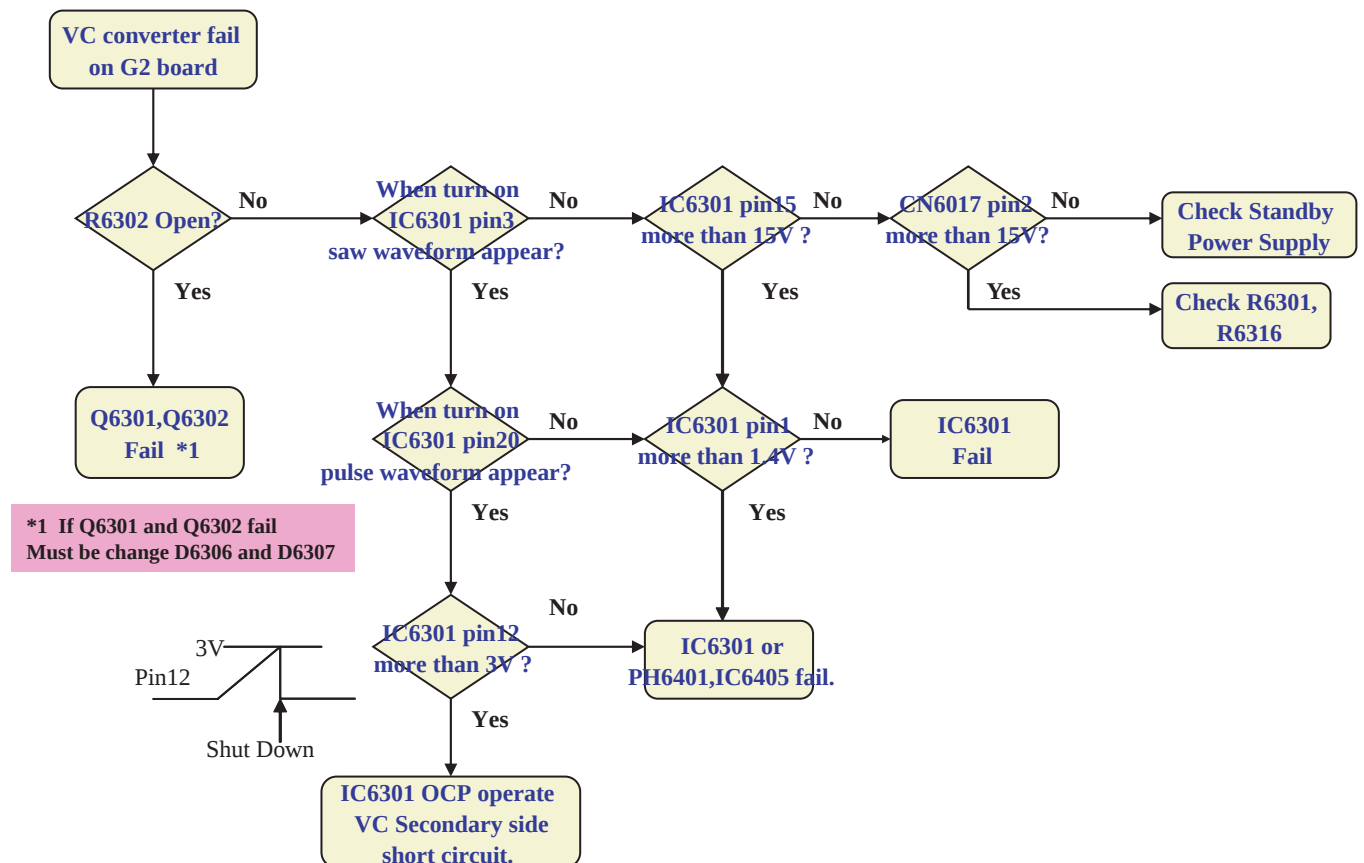


VA converter fail
on G2 board



VD converter trouble shooting (NPD)

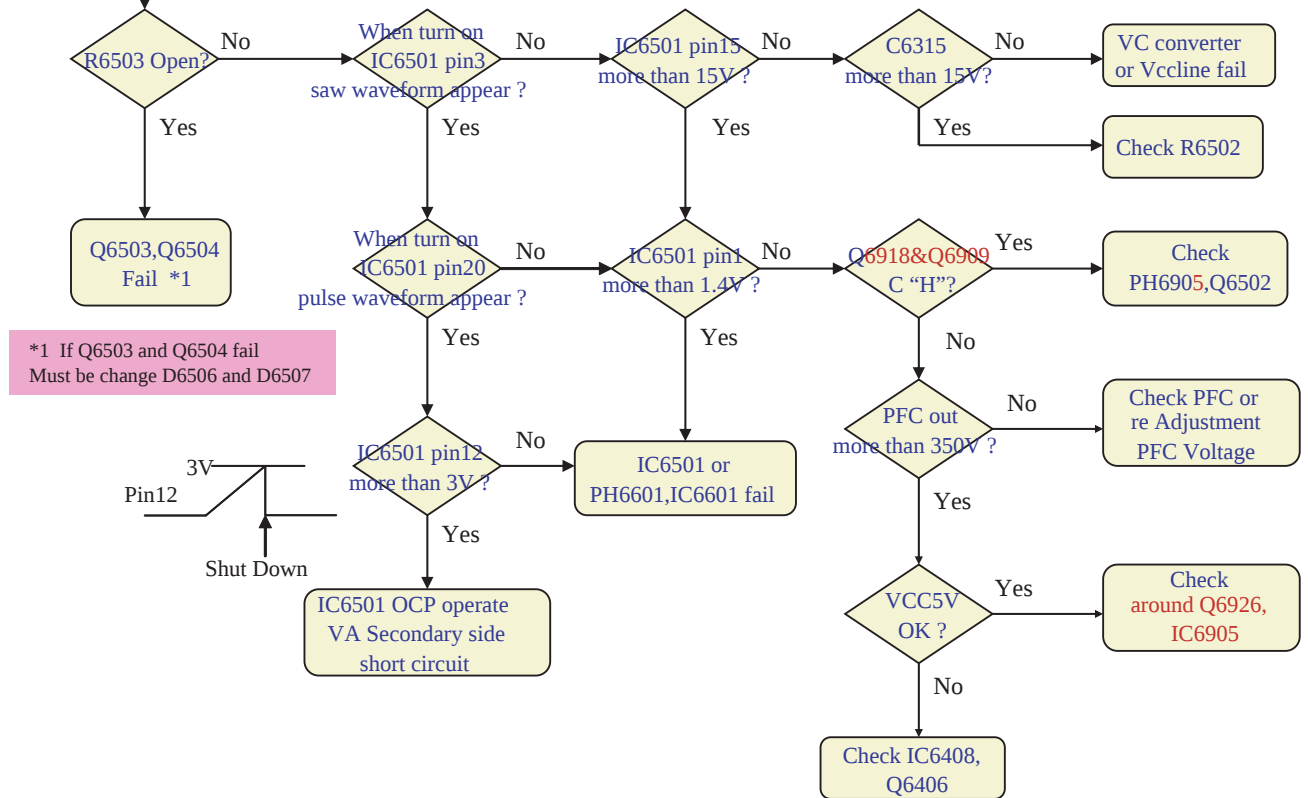


VS converter trouble shooting

VS converter fail
on G2 board

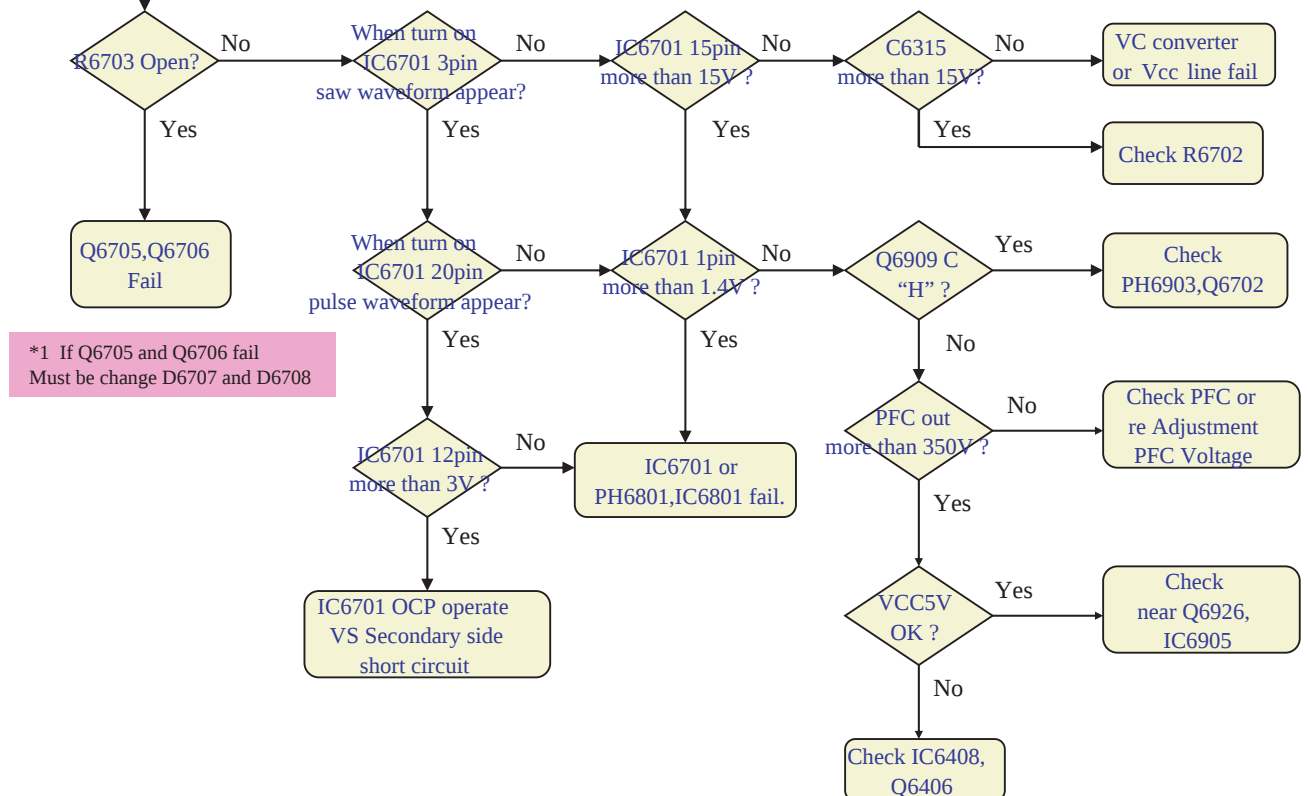


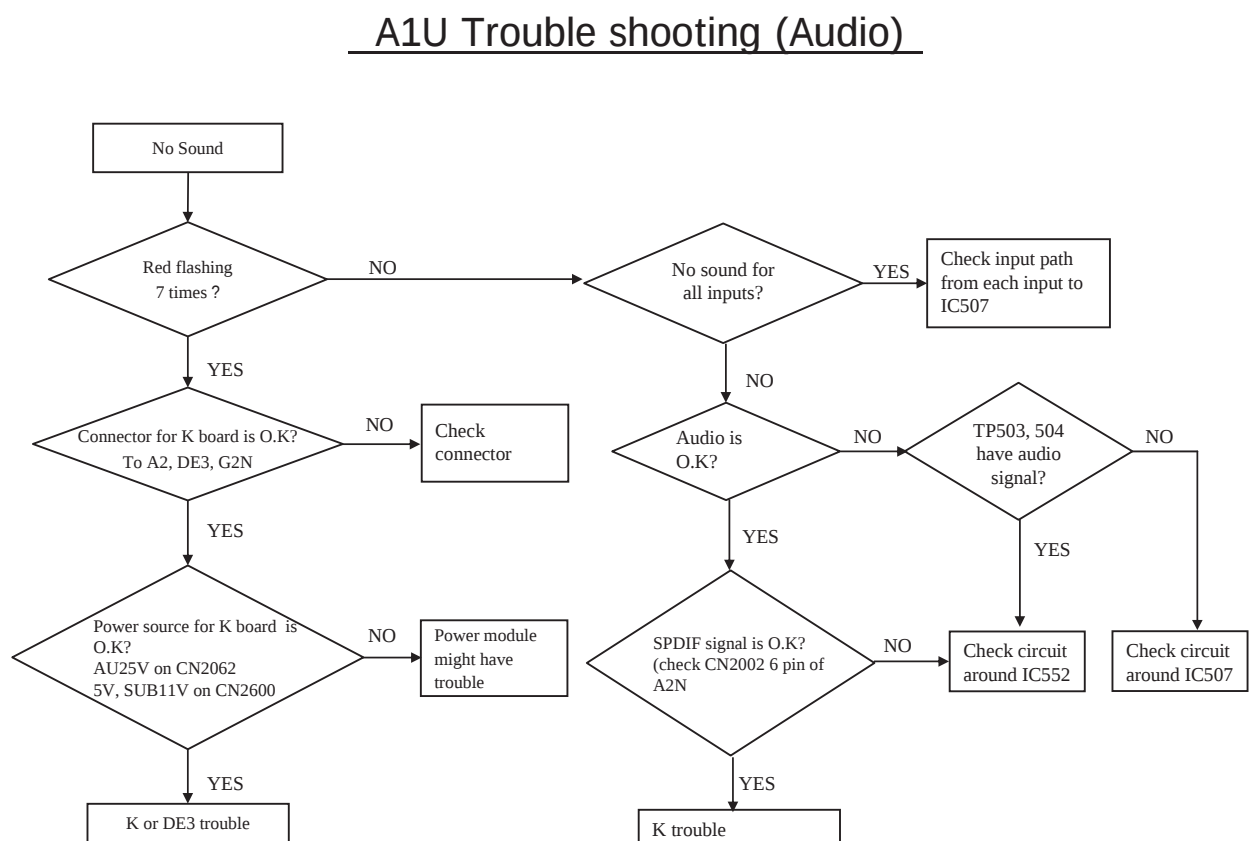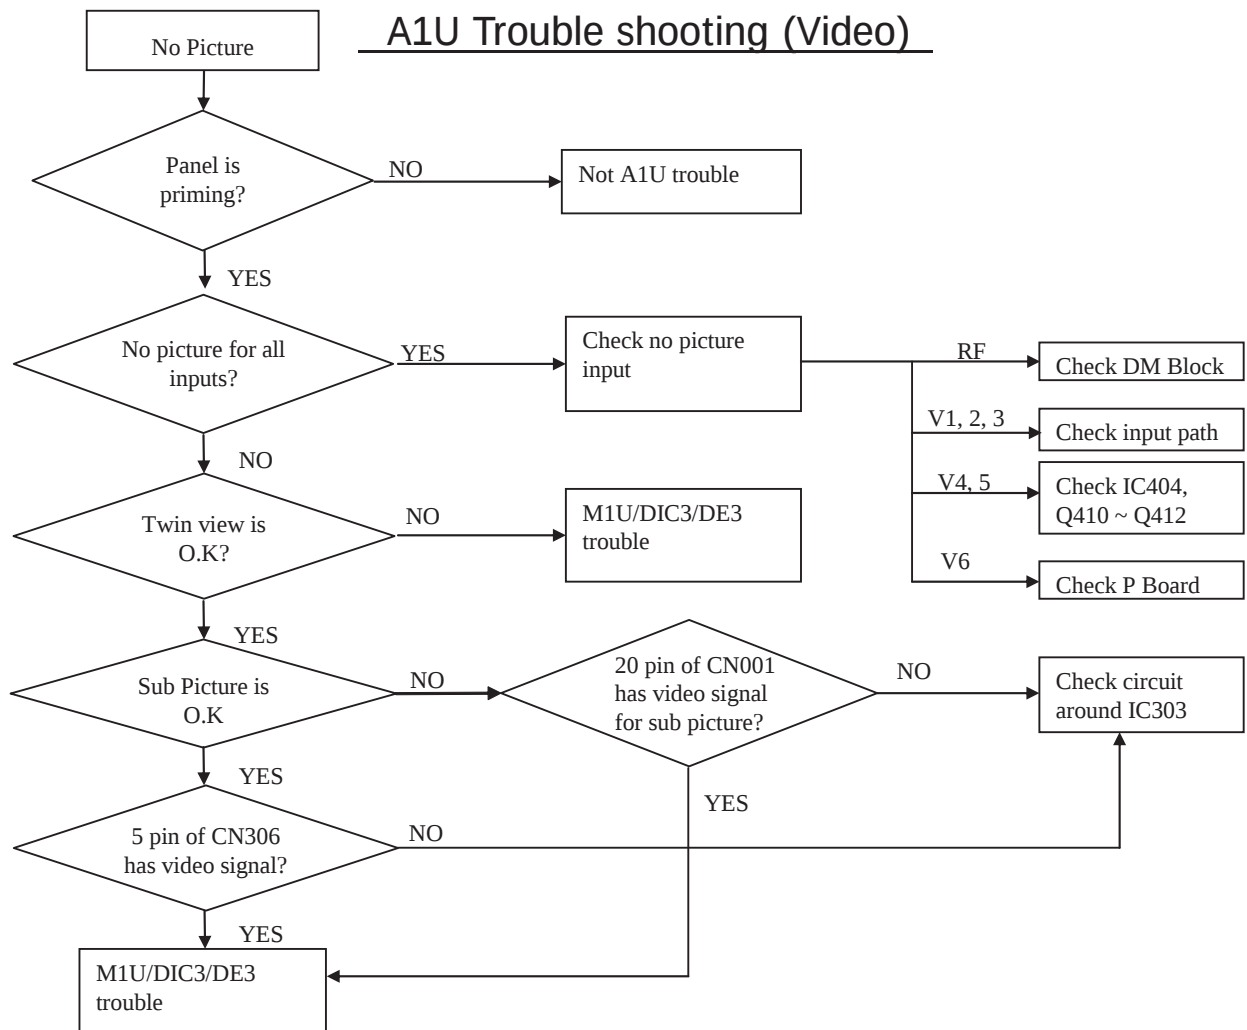

A2NU Trouble Shooting

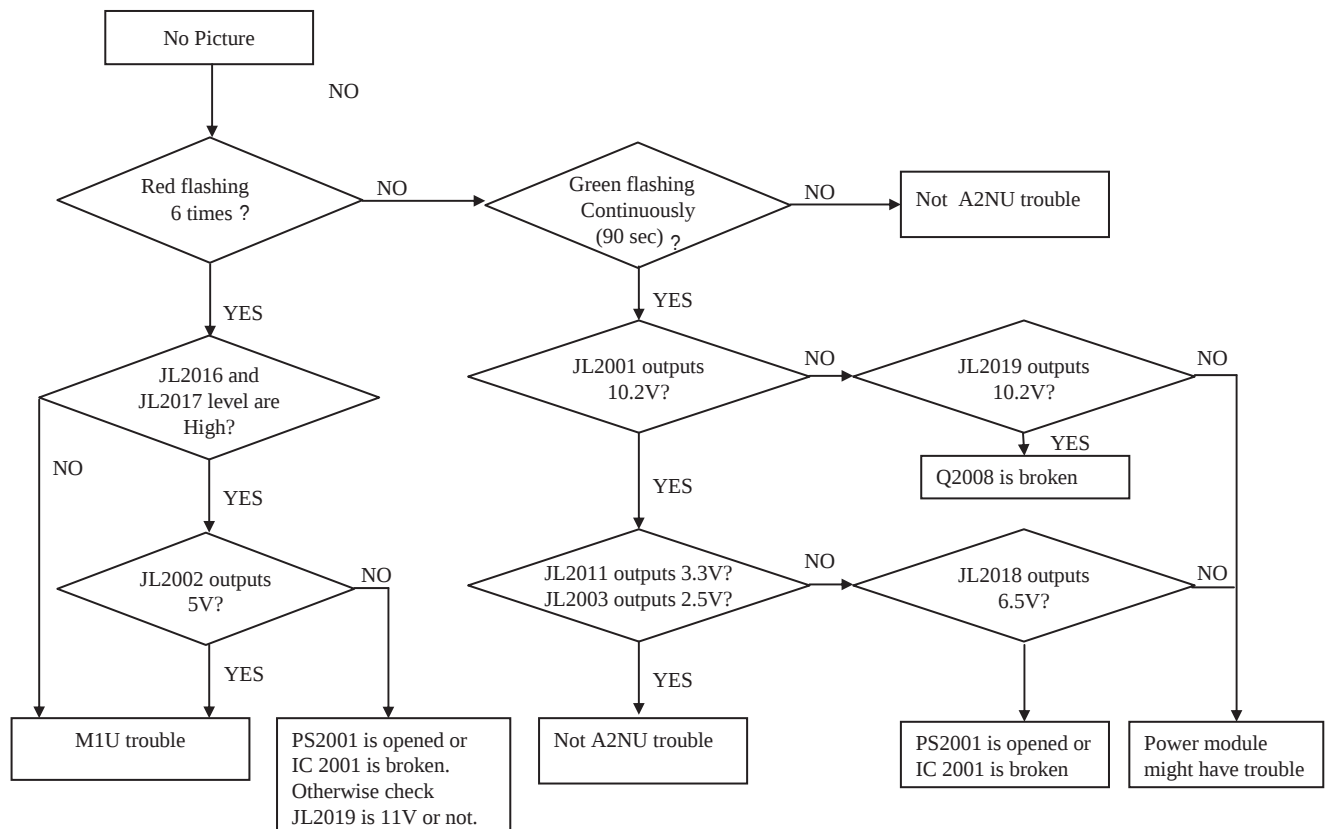

M1U Trouble Shooting -1

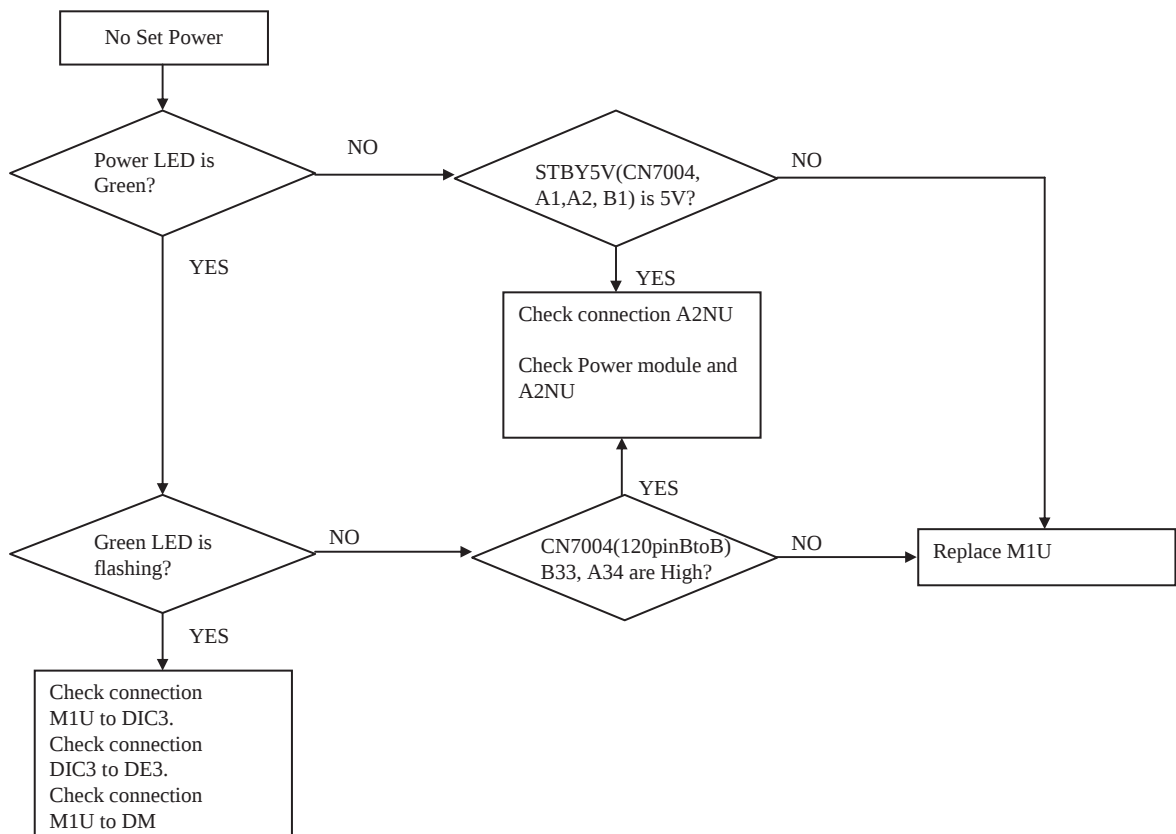


M1U Trouble Shooting -2


These symptom might be related M1U board as below.

- Strange Menu OSD or Lack of upper side in Media Viewer mode
 - Check connector CN7650 (LVDS Connector to QM)
 - Check connector CN7552 and CN7553(B to B connector to DIC3)
 - IC7650 (LVDS Receiver) might be broken or not operate correctly
- No Sub Picture
 - IC7701 (CCPX) or path to IC7701 might be broken or not operate correctly
- Closed Caption Decode error in good signal condition
 - IC7002 (TV Micro) or path to IC7701 might be broken or not operate correctly


DIC3 Power Trouble Shooting -1

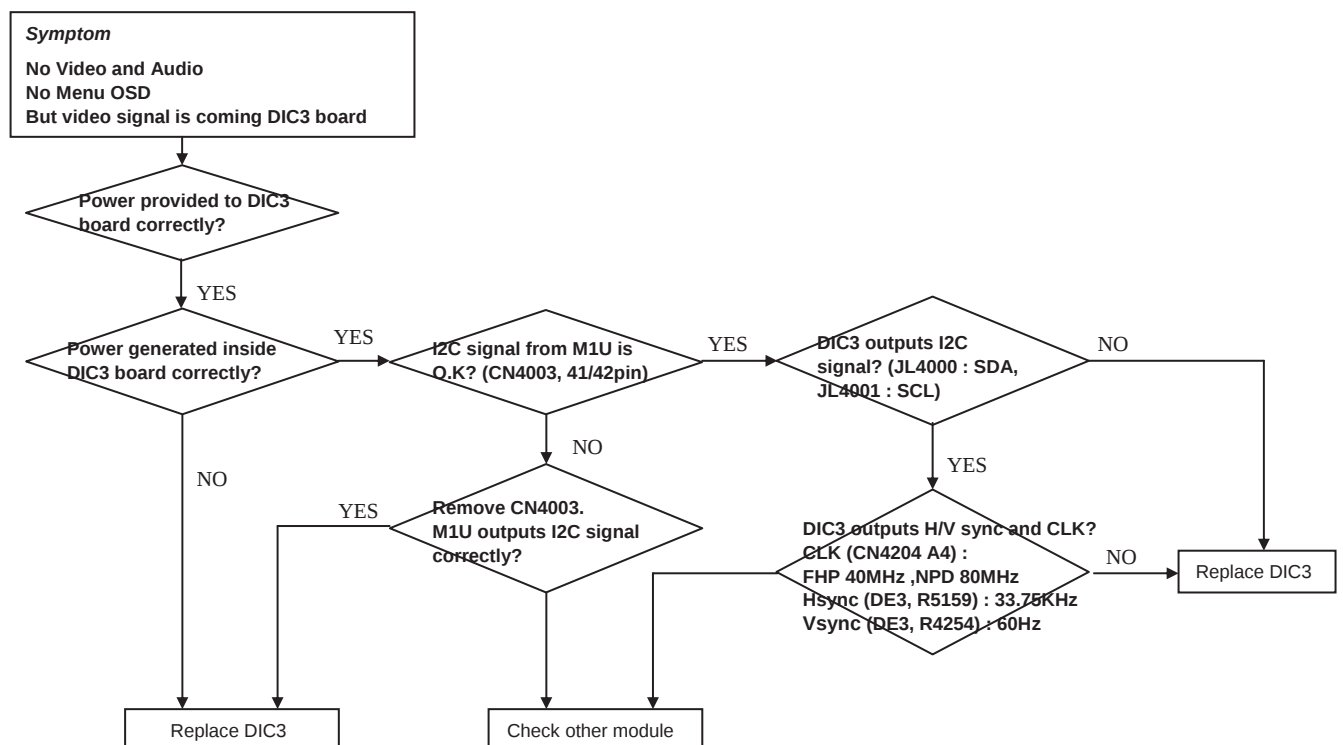

DIC3 Power Trouble Shooting -2

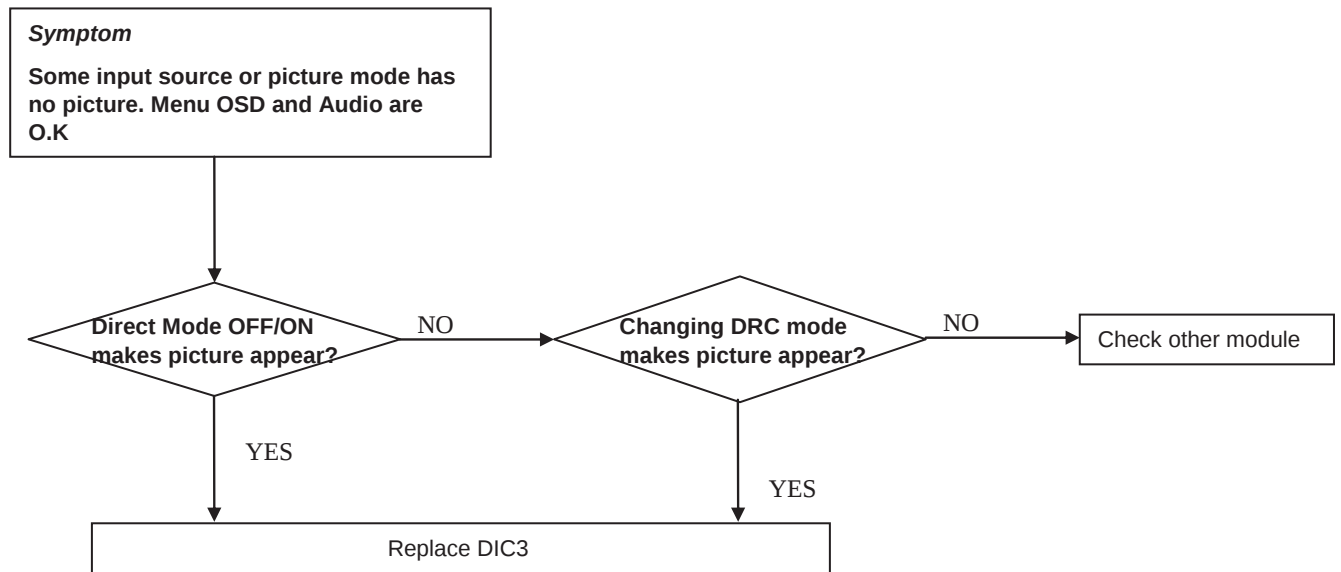

DE3 Trouble shoot for NPD(50")

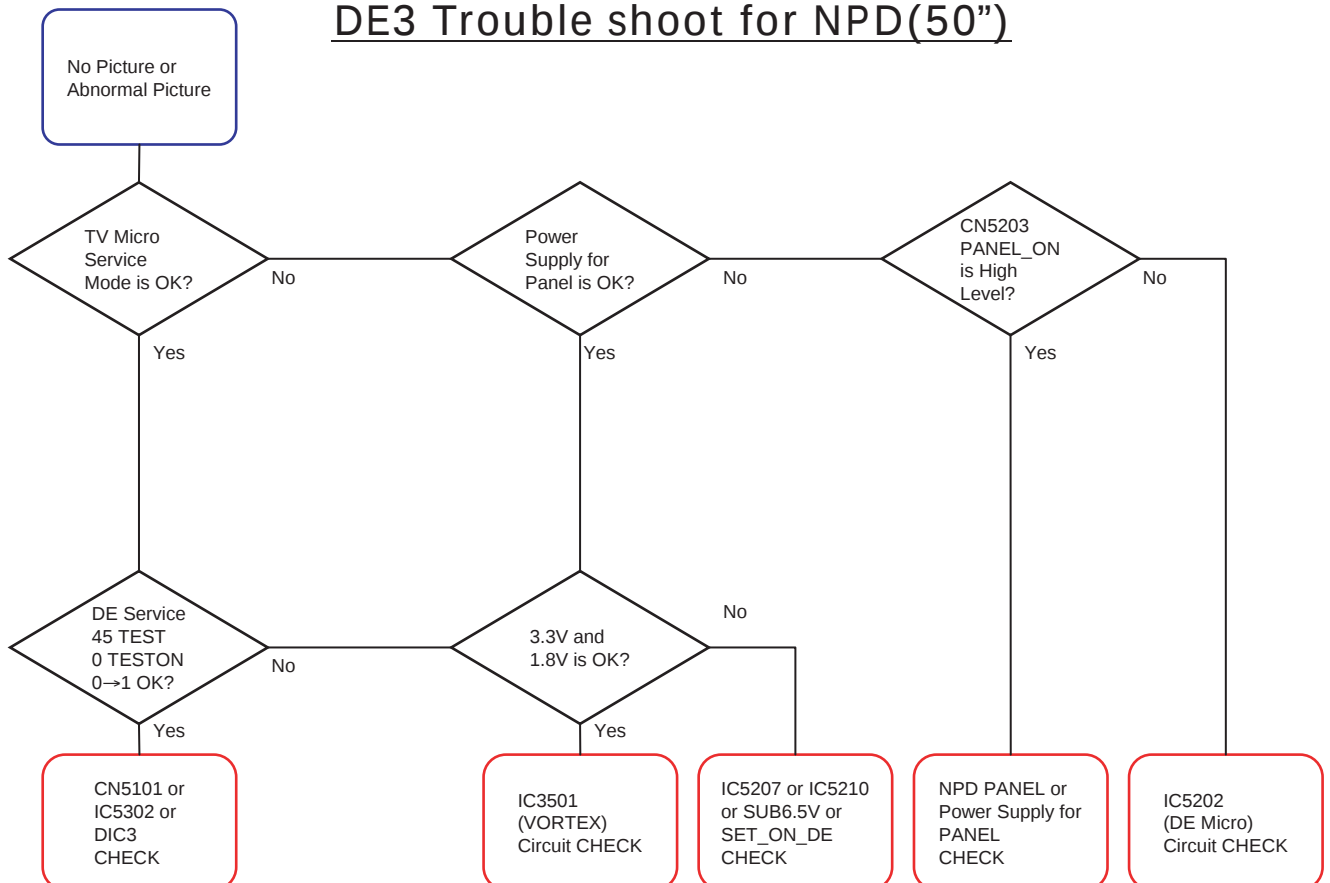

P Symptom & Action

Replace [P] board when those symptom has occurred as below.

-No Picture / No Sound

PS9500 might be open.

IC9505 might be broken.

-No Sound

IC9504 might be broken or not operate correctly.

-Shaking Picture

Possible Claims about connectivity

-Aspect Ratio

-Greenish Picture / Pinkish Picture

-Snow Picture

-No Picture / No Sound

-No Sound

→Those case are not [P] board broken.Those claims is the cause of combination between TV and Source Device (DVD etc.).

K Trouble Shooting -1

•Symptom 1:No or irregular sounds from the L/R channel (but not from the Woofer Channel).

(To do) Check the input signals to and output signals from the IC2604.

(Your results) There are IIS input signals to the IC, but no PWM or irregular output signals from the IC.

(Cause) The IC2604 itself might have been sub-standard, or broken.

•Symptom 2: No or irregular sounds from the Woofer channel (but not from the L/R channel)

(To do) Check the input signals to and output signals from the IC2607.

(Your results) There are IIS input signals to the IC, but no PWM or irregular output signals from the IC.

(Cause) The IC2607 itself might have been sub-standard, or broken.

•Symptom 3: No sounds from either Lch, Rch, or Wch (Only one of three).

(To do) Check the IC2605 (Lch), IC2606 (Rch) and IC2608 (Wch).

(Your results) There are IIS input signals to one of the each, but no PWM or irregular output signals from one of the each.

(Cause) One of the IC2605 (Lch), IC2606 (Rch) or IC2608 (Wch) might have been sub-standard, or broken

K Trouble Shooting -2

Symptom 4: No sounds from L, R, and Wch at all

(To do) Check the AMP_RST port of the IC2605 (Lch), IC2606 (Rch) and IC2608 (Wch).

(Your results) The AMP_RST port is utputting “L”.

(Cause) Microcontroller port (AMP_RST) error or IC2602 and/or IC 2614 might have been sub-standard or broken

(To do) Check the M_RST port of the LC89056 (IC2600) and CXD9788R (IC2604, IC2607)

(Your results) The M_RST port is outputting “L”

(Cause) Microcontroller port (M_RST) error or IC2609 might have been sub-standard or broken

(To do) Check the input and output voltage of the IC6103<3.3V> an d IC6101<12V>

(Your results) There are voltages supplied to the IC6103<3.3V> or IC6101<12V> but no output voltage from either/both ICs

(Cause) Regulators (IC6103<3.3V> or IC6101<12V>) might have been sub-standard or broken.

(To do) Check the input signals to or output signals from the CXD9835TN (IC2603)

(Your results) There are input IIS signals to the IC, but no output signals from the IC

(Cause) IC2603 might have been sub-standard or broken

(To do) Check the input signals to or output signals from the LC89056 (IC2600)

(Your results) There are input SPDIF signals to the IC, but no output signals from the IC

(Cause) IC2600 might have been sub-standard or broken.

K Trouble Shooting -3

•Symptom 5: Different sounds or irregular sound from L,R, or W ch

(Check) Check the input signals to or output signals from the CXD9835TN (IC2603)

(Result) There are input IIS signals present, but no or irregular output signals from the IC

(Cause) IC2603 might have been sub-standard or broken

•Symptom 6: Interrupted or noisy sounds from the L, R, or/and W ch

(Check) Check the error port (JL 2616) of the LC89056 (IC2600)

(Result) Outputting “H”

(Cause) SPDIF error .

SPDIF transmitter might have been sub-standard or broken

or LC89056 (IC2600) might have been sub-standard or broken

Trouble shooting related with Digital Module

Connection failure

- Set no power
 - CN7300 connection or cable damage.
- No DTV and No Memorystick. But NTSC is OK.
 - CN7309 connection or cable damage. (DA4, AX1X, LA3, Plasma)
 - No DTV. But Memorystick and NTSC is OK.
 - 40Pin FFC connection or cable damage.
- No DTV and No NTSC. But Memorystick is OK.
 - RF cable (F-F) or ANT-SW 5pin wire connection or cable damage.
- No NTSC. But DTV and Memorystick is OK.
 - CN7901 is connection or cable damage.
- No menu OSD. But Memorystick mode is OK.
 - CN7304 connection or cable damage. (LA3, SXRD, Plasma)
- Memorystick is not detected by insertion.
 - USB connection or cable damage.
- Only no Digital cable video/audio. ATSC is OK.
 - RF cable (P-P) or 80Pin FFC connection or cable damage.

Key Component/Circuit failure


- ATi chip failure
 - Reboot (intermittent video)
 - Distorted graphics (block noise error on Menu or Memorystick)
- Power supply failure (QM or Set power)
 - No power (cannot see heart beat LED from jig CN. But can see one of QT LED.)
- NTSC demodulator failure.
 - No Audio. Distorted audio. No NTSC video.
- Tuner (Inside of Front End) failure.
 - No NTSC, No ATSC, No D-Cable.
- Digital demodulator failure.
 - No DTV (ANT, Cable)
 - May not boot the system.
- i.LINK(80/40pin BtoB CN or i.CES(BGA chip on QI or QFP IC) failure.
 - No i.LINK (D-VHS, DV)

SECTION 3

ADJUSTMENTS

3-1. SERVICE MODE

- How to Enter Service Mode
 - Turn on the main power switch to place this set in standby mode. (The LED will light red.)
 - Press the buttons on the commander as follows to enter service mode.




- Press the JUMP key on the commander three times.
- How to Adjust

" 29 MAIN_WB"

Category name.

(Can be changed with the 2 and 5 keys on the commander.)

5 GAINR 512

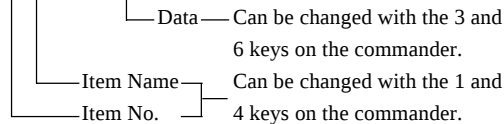

- After the adjustment is completed, save the data using the **MUTE** and **ENTER** keys.

3-2. SERVICE MODE LIST


CATEGORY	ITEM		DATA
	NO.	Name	
MAIN_WB	5	GAINR	512
	6	GAING	512
	7	GAINB	512


4-1. BLOCK DIAGRAMS

(1) A1U AND H2 BOARDS




(2) A2NU (1/2) AND J1NU BOARDS

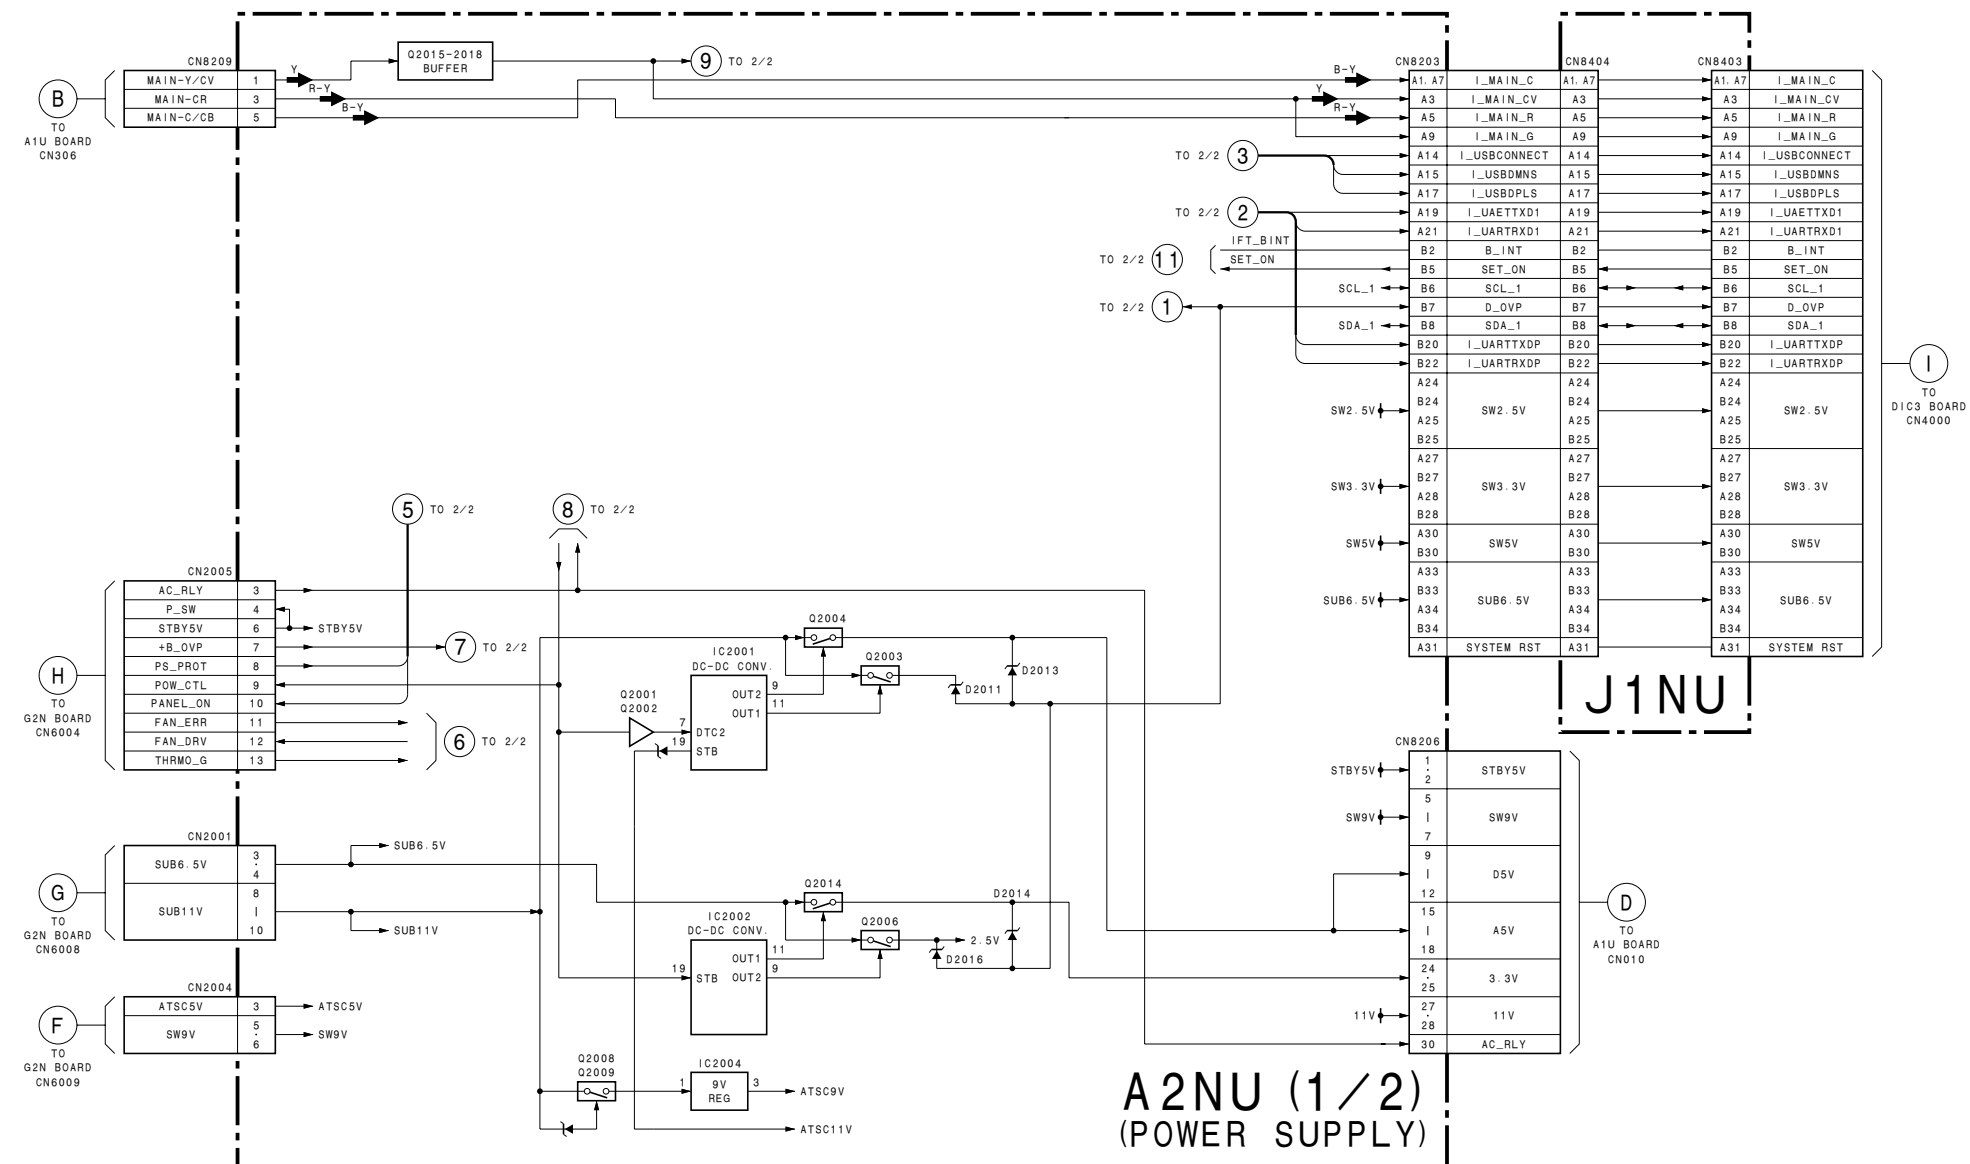


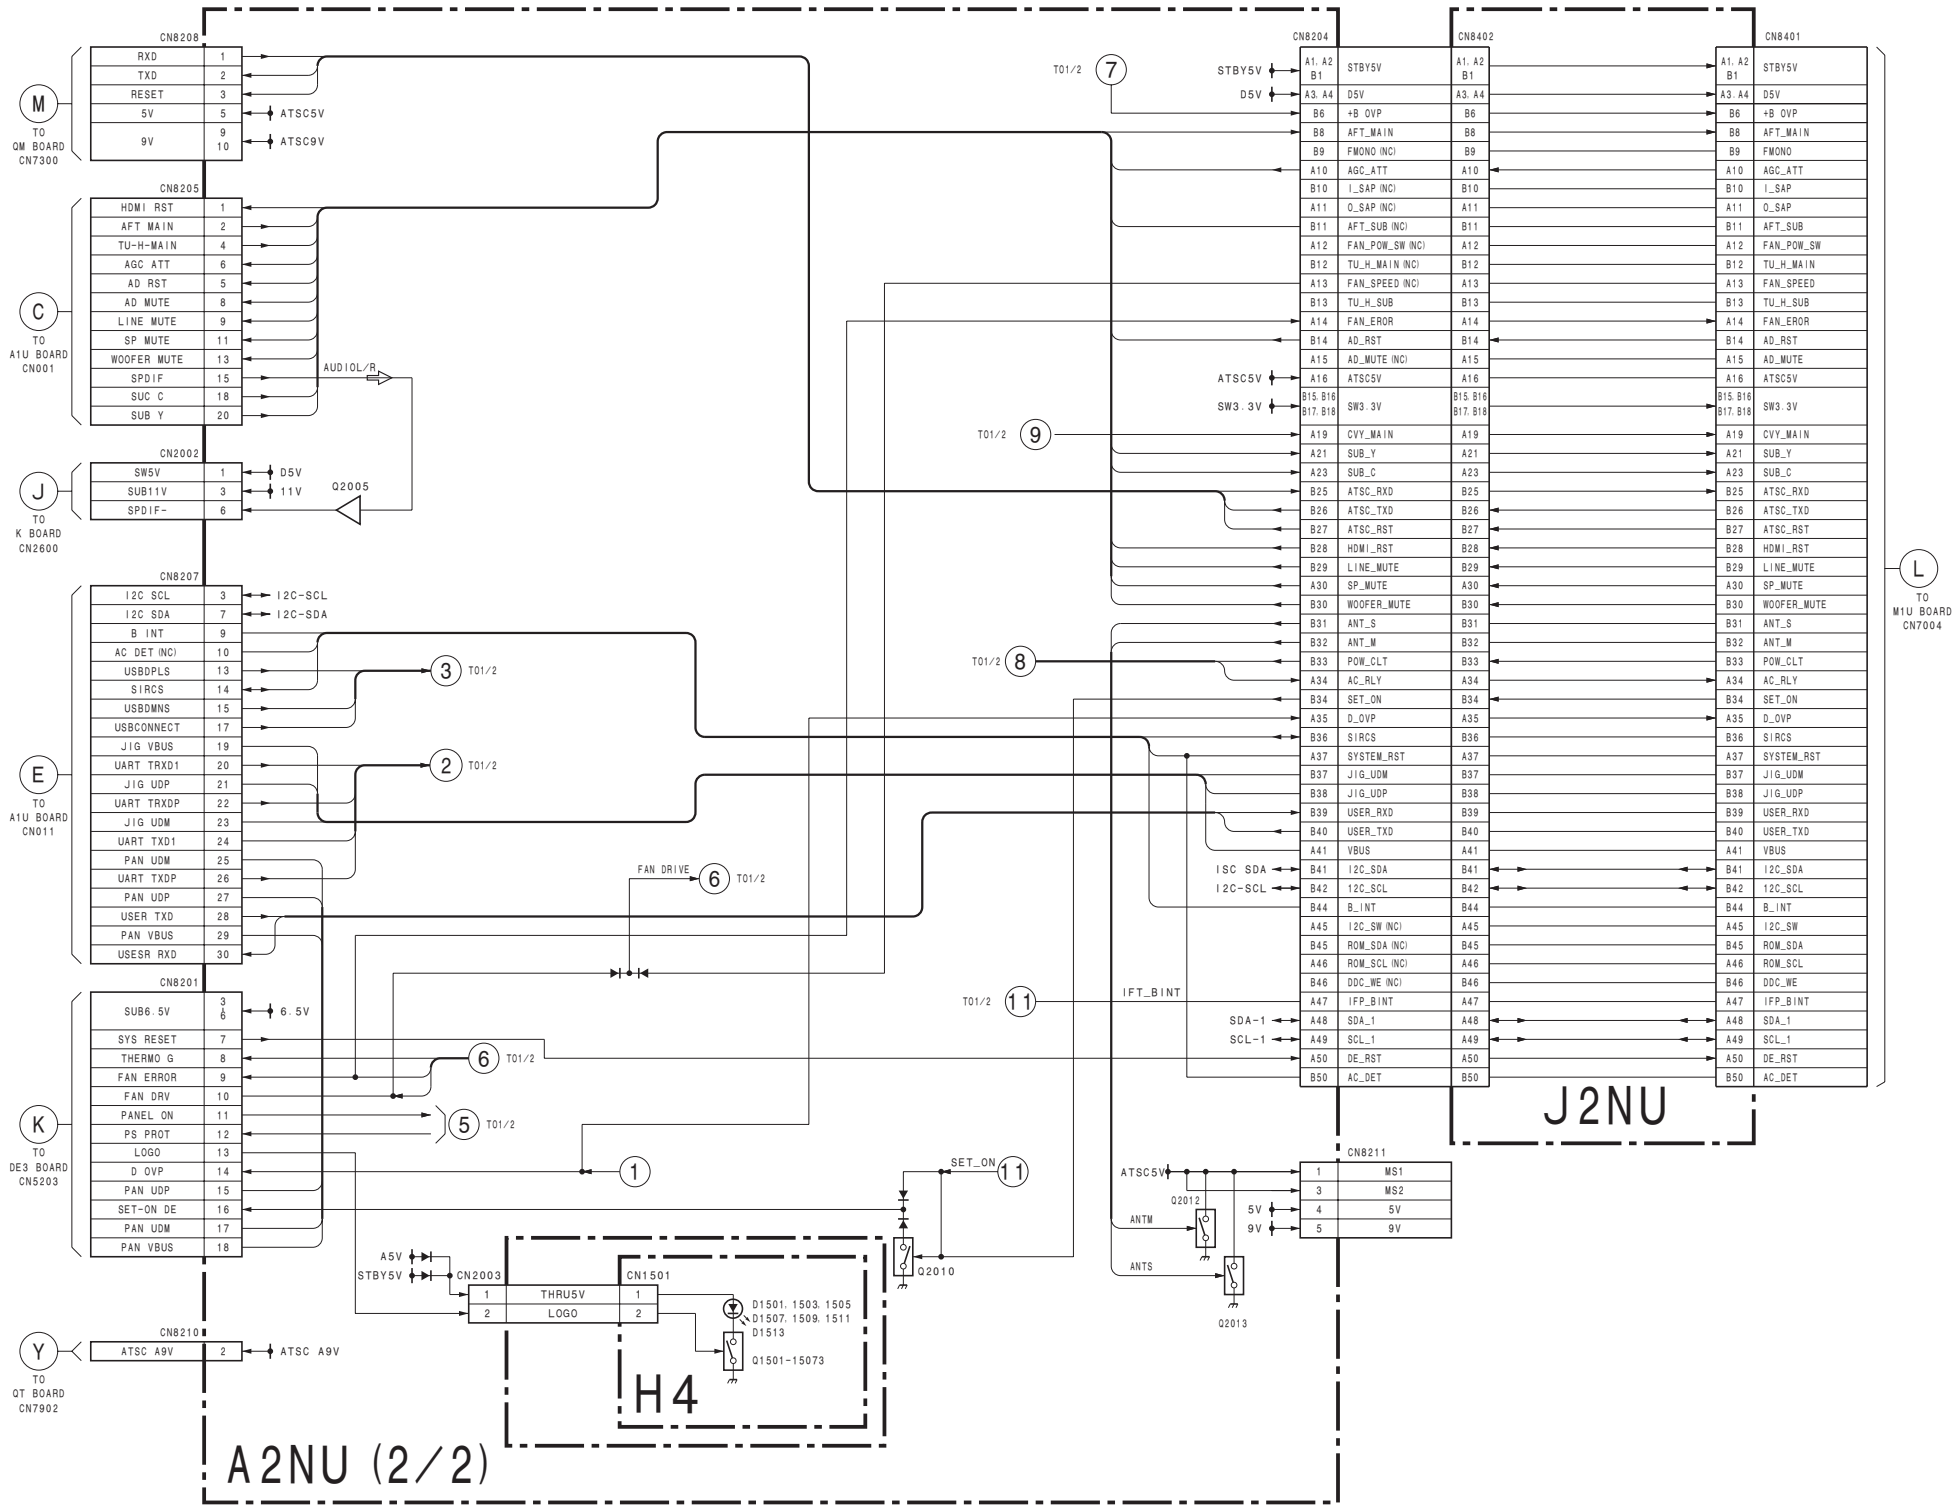


(4) DE3 BOARD

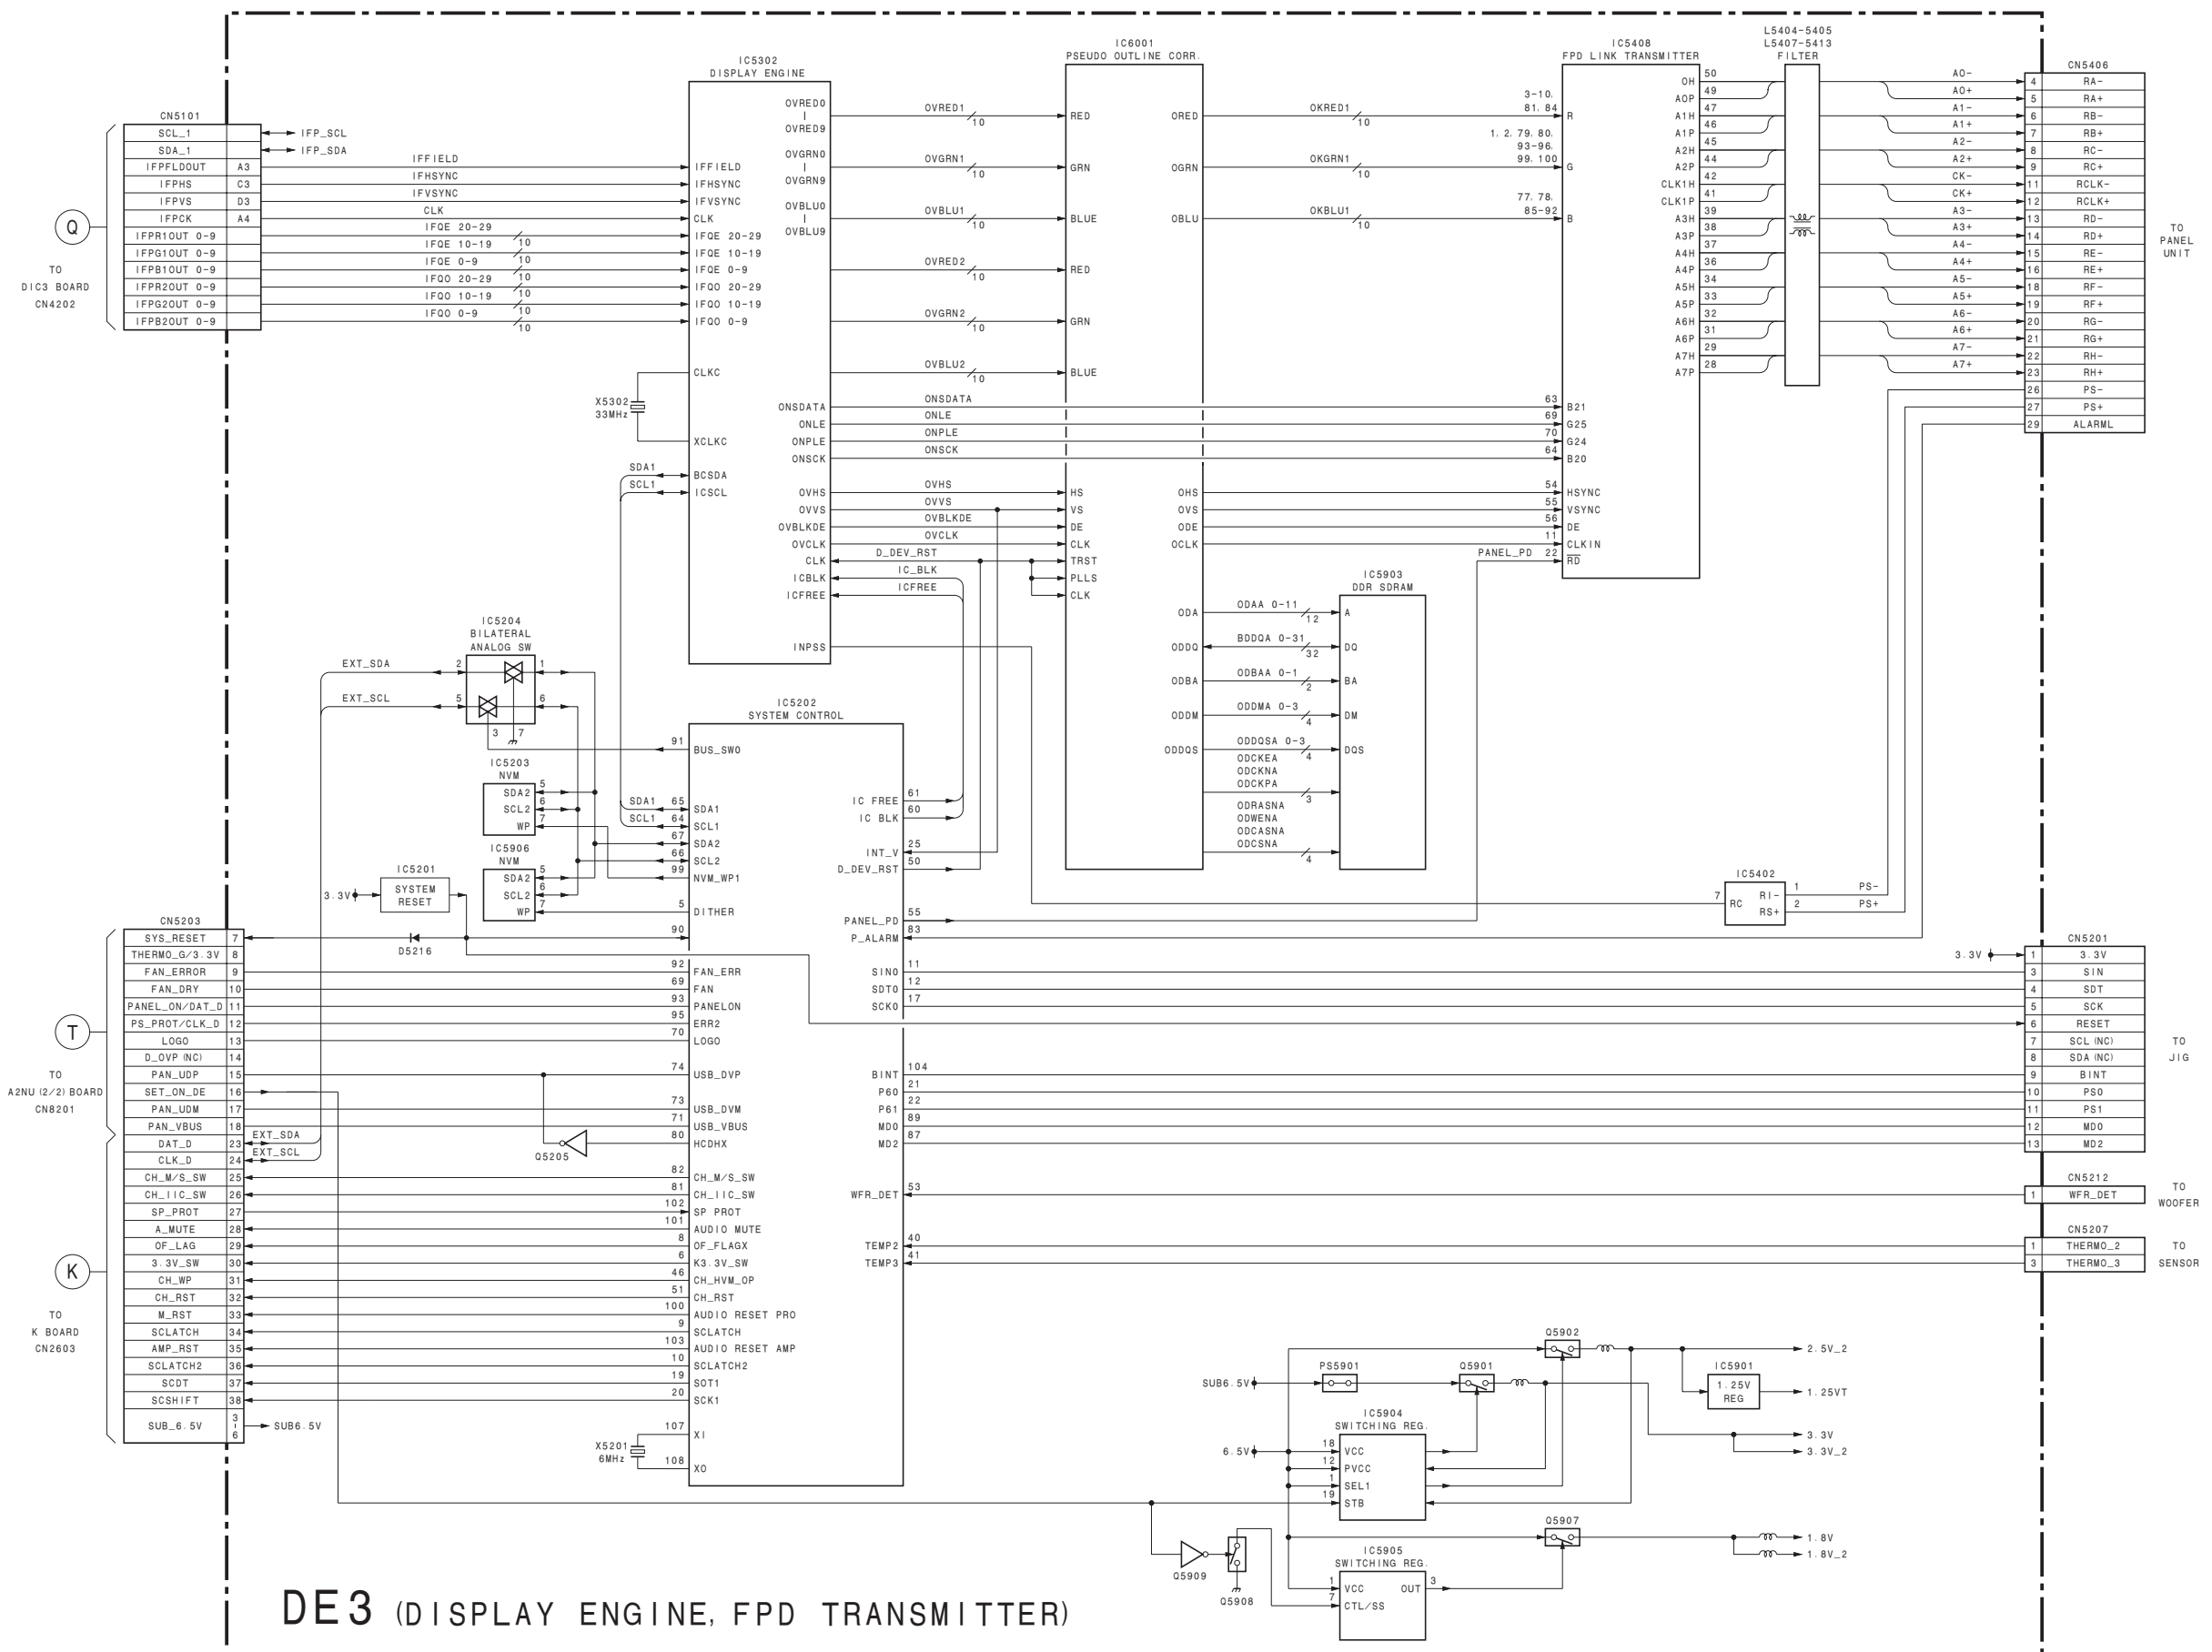


(5) DIC3 BOARD

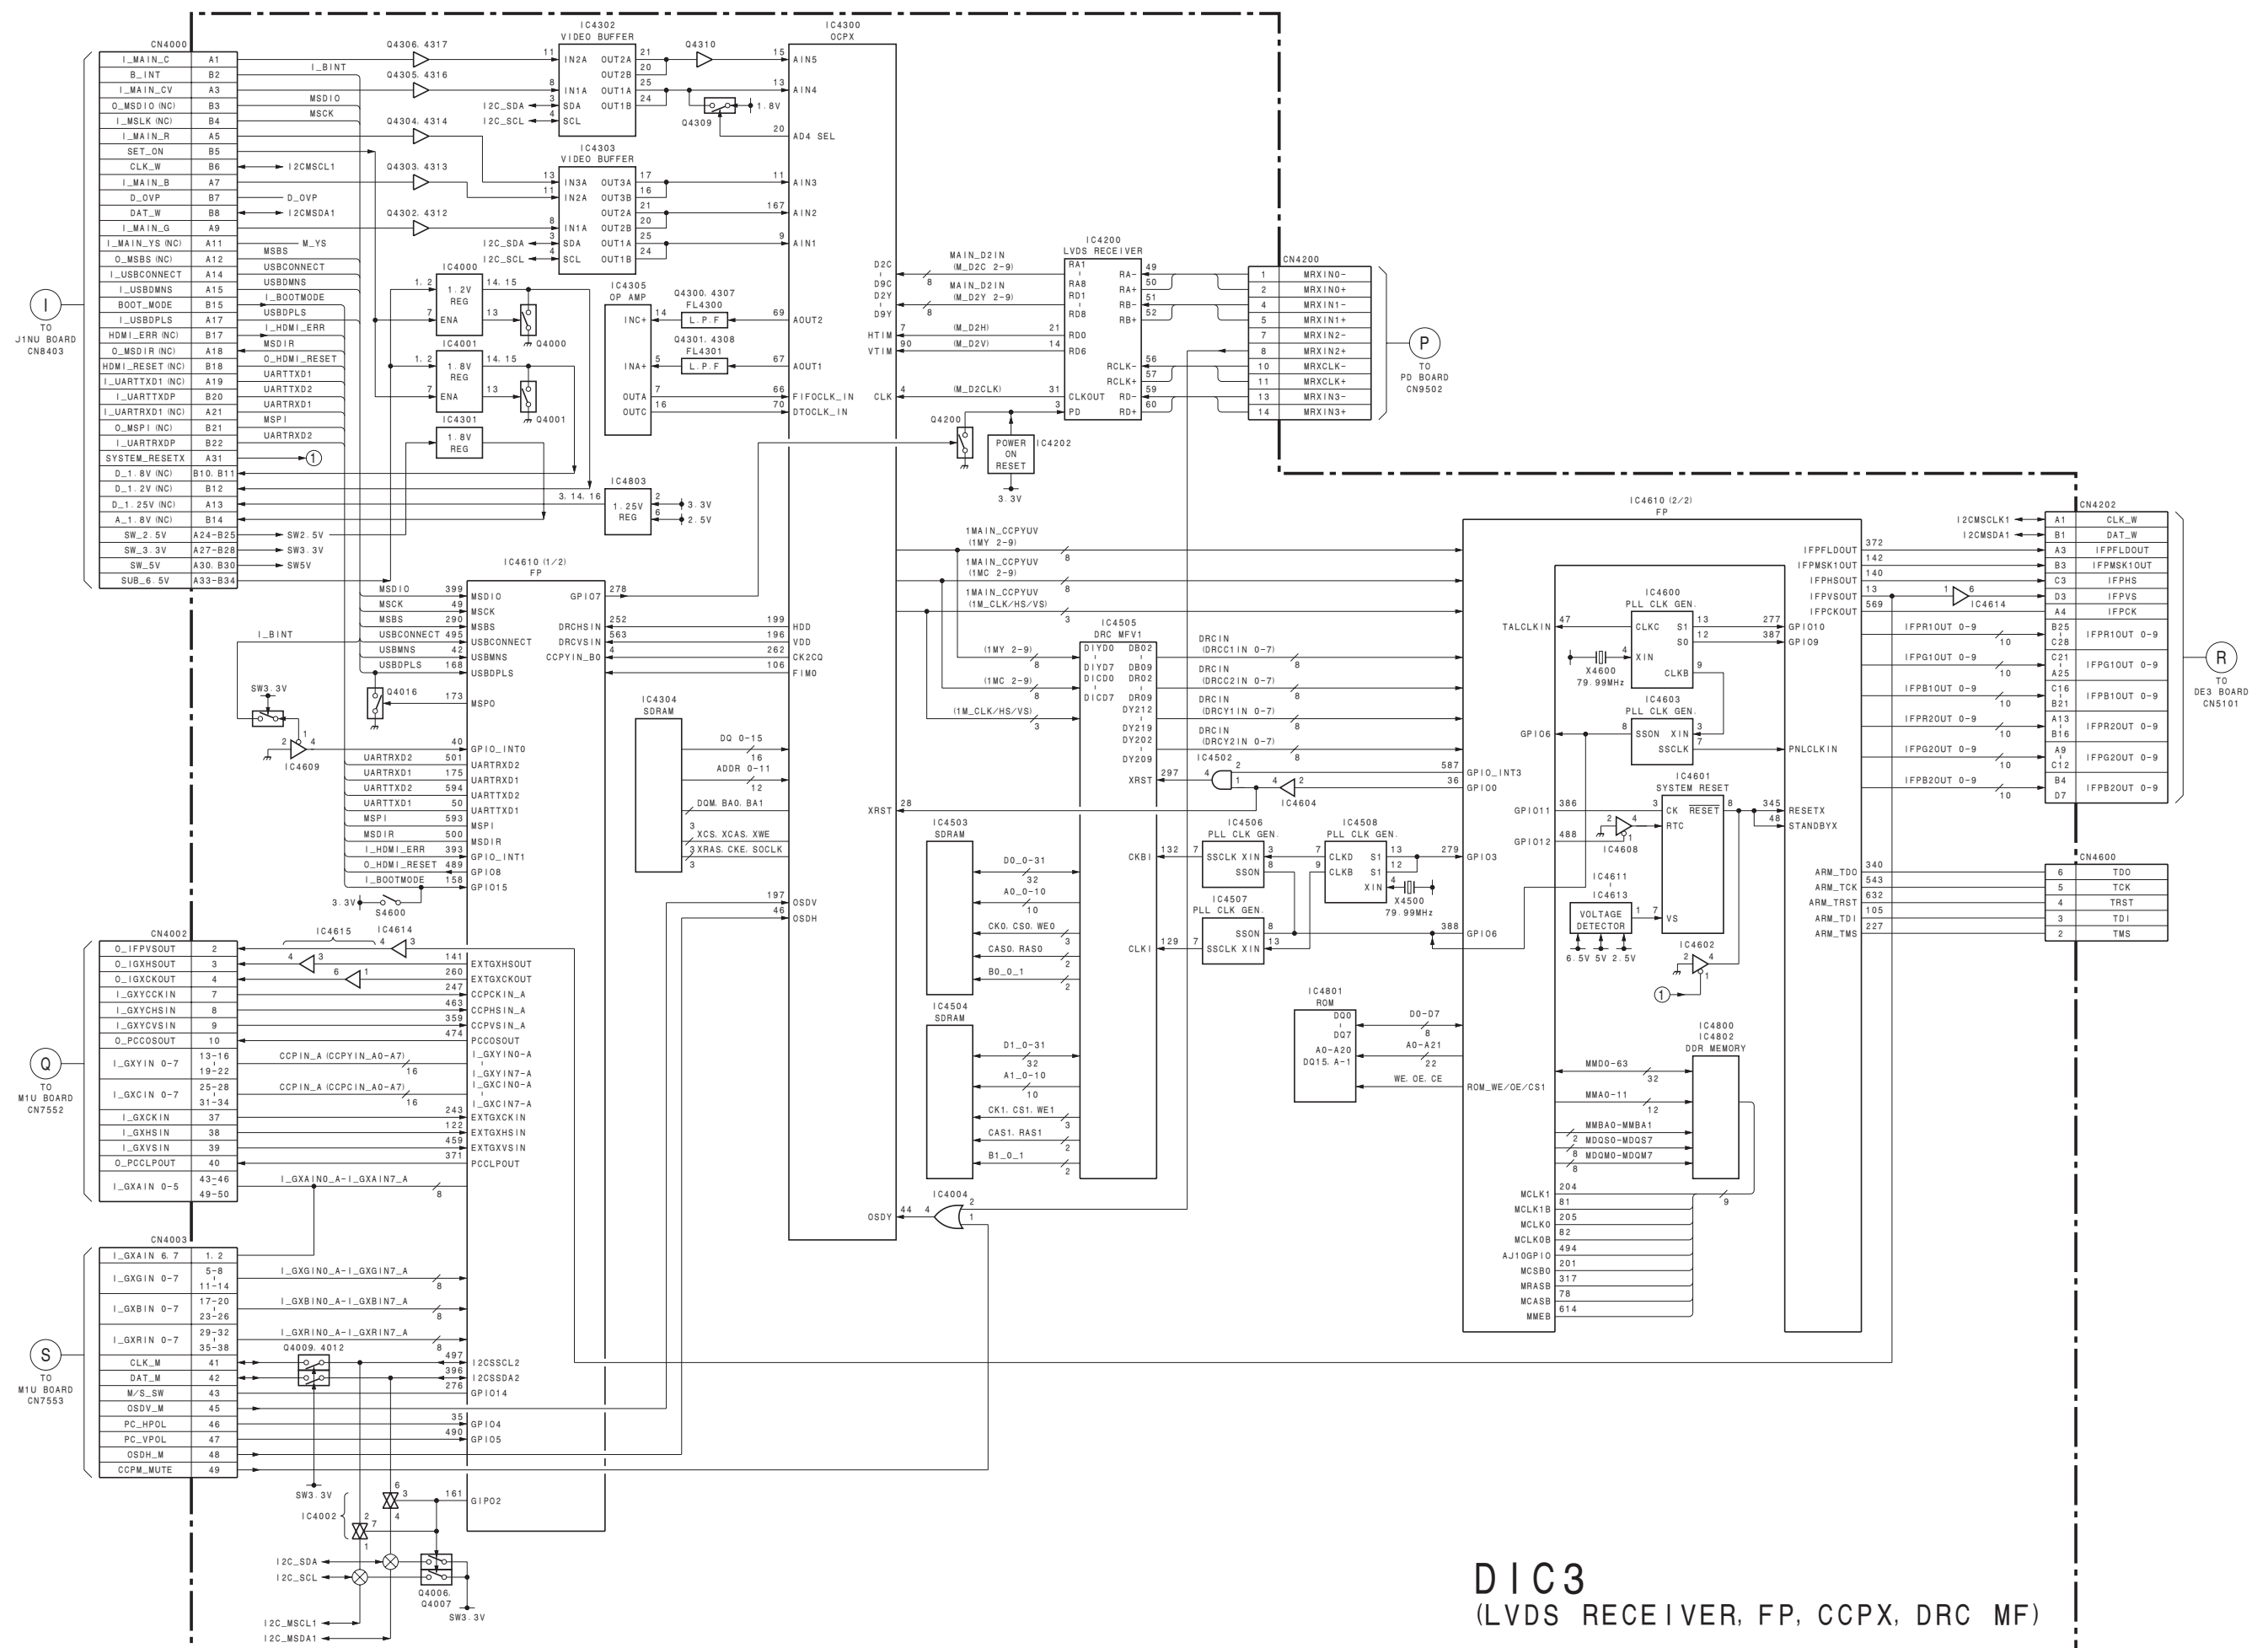


(6) F AND G1 BOARDS

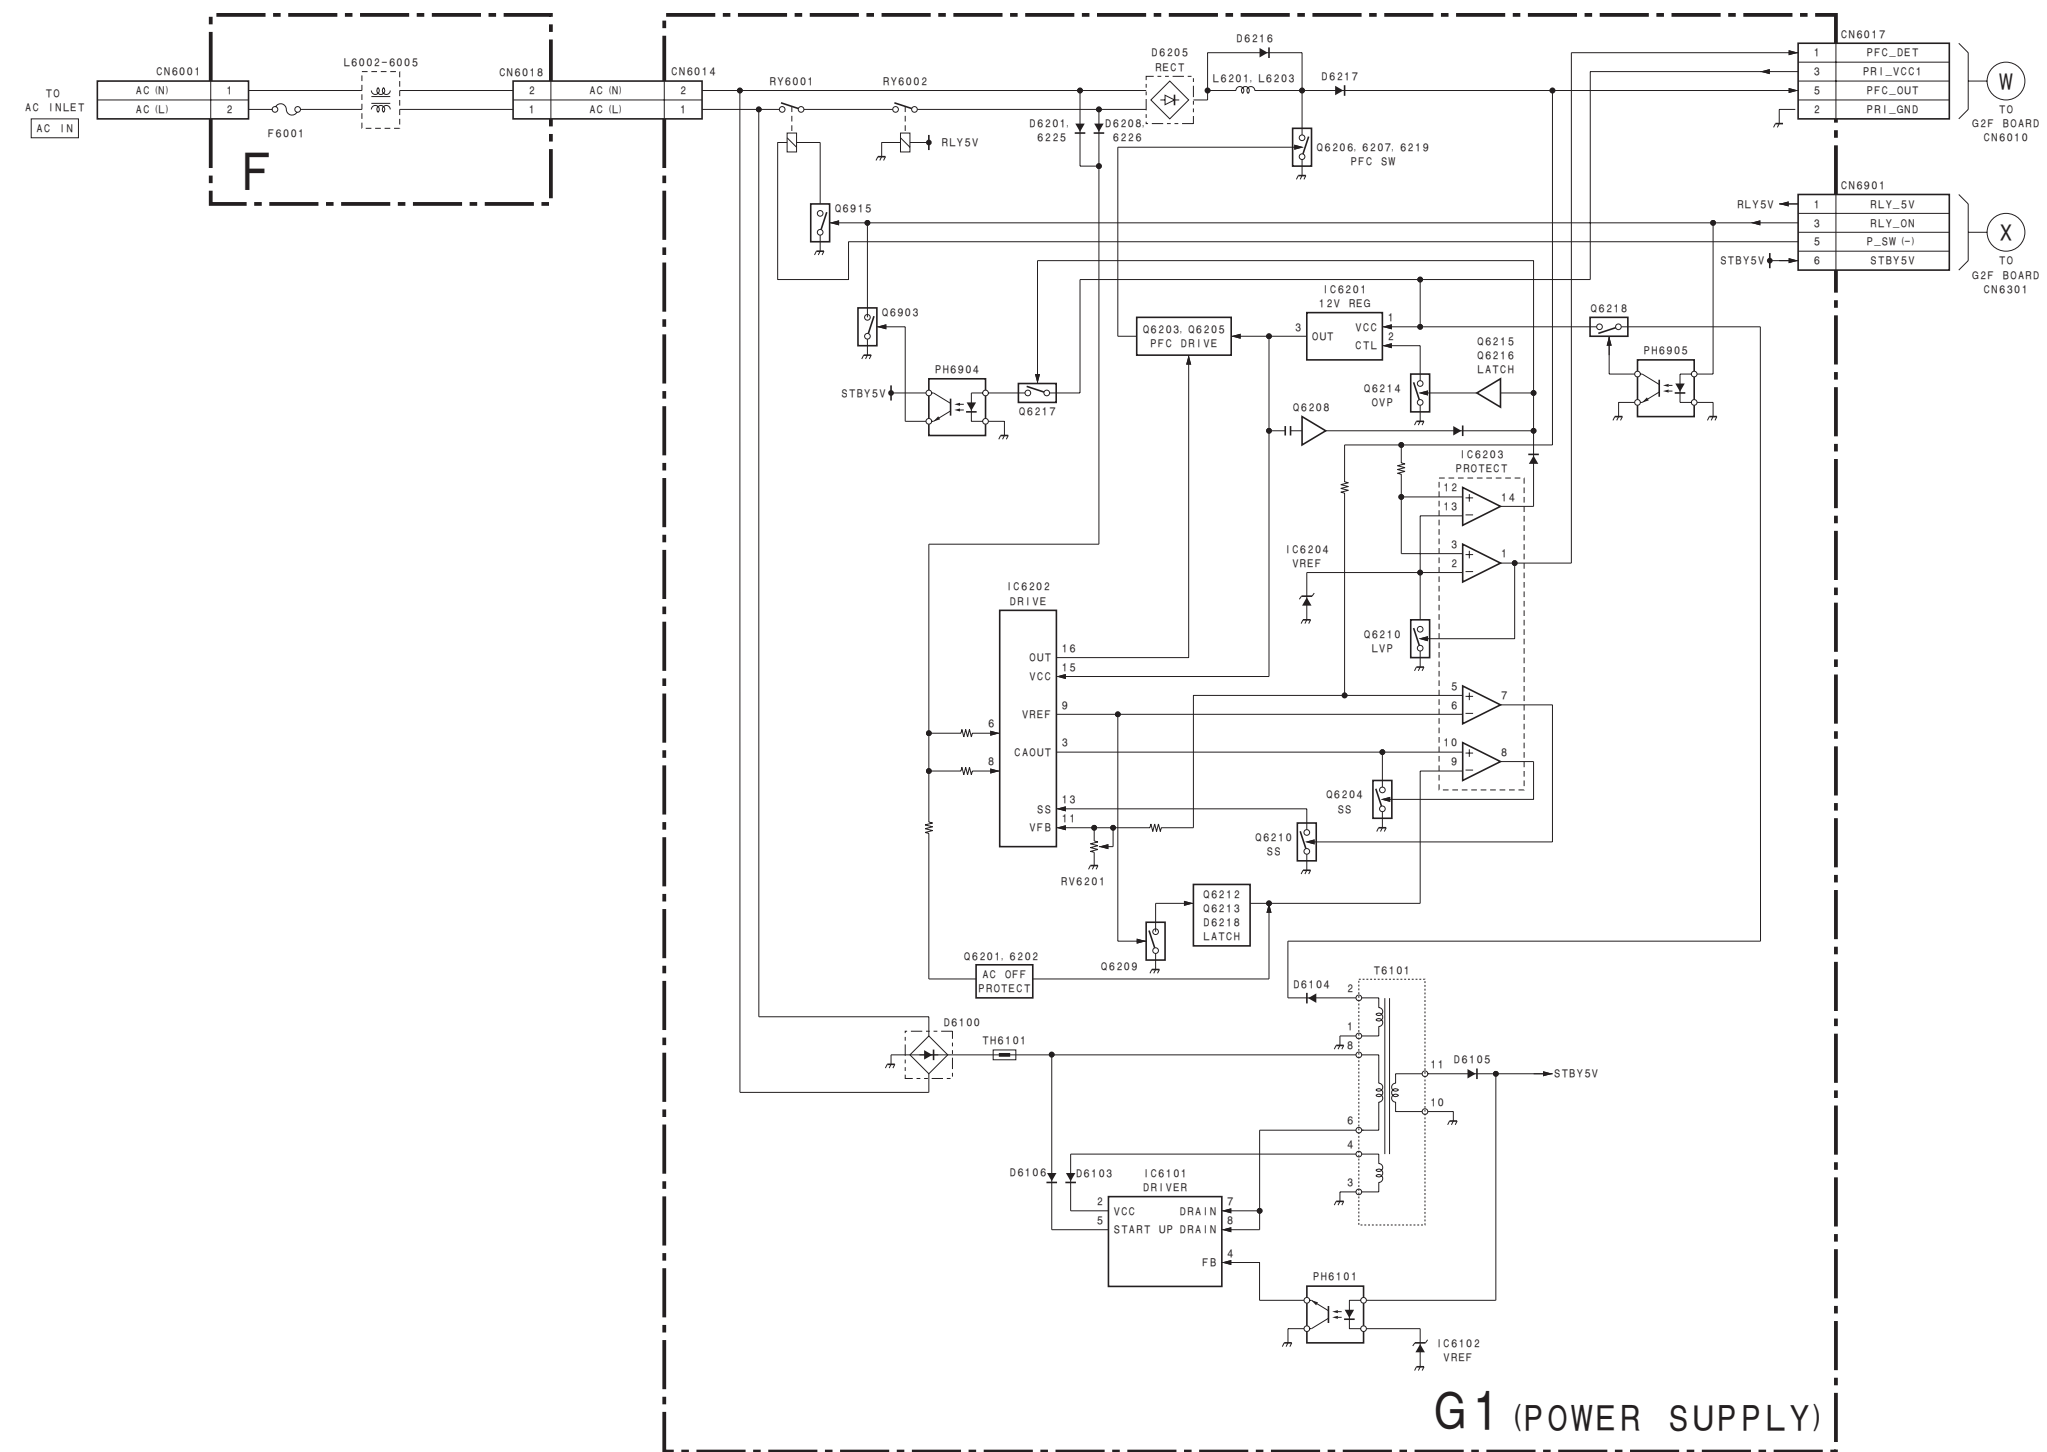



(7) G2N BOARD

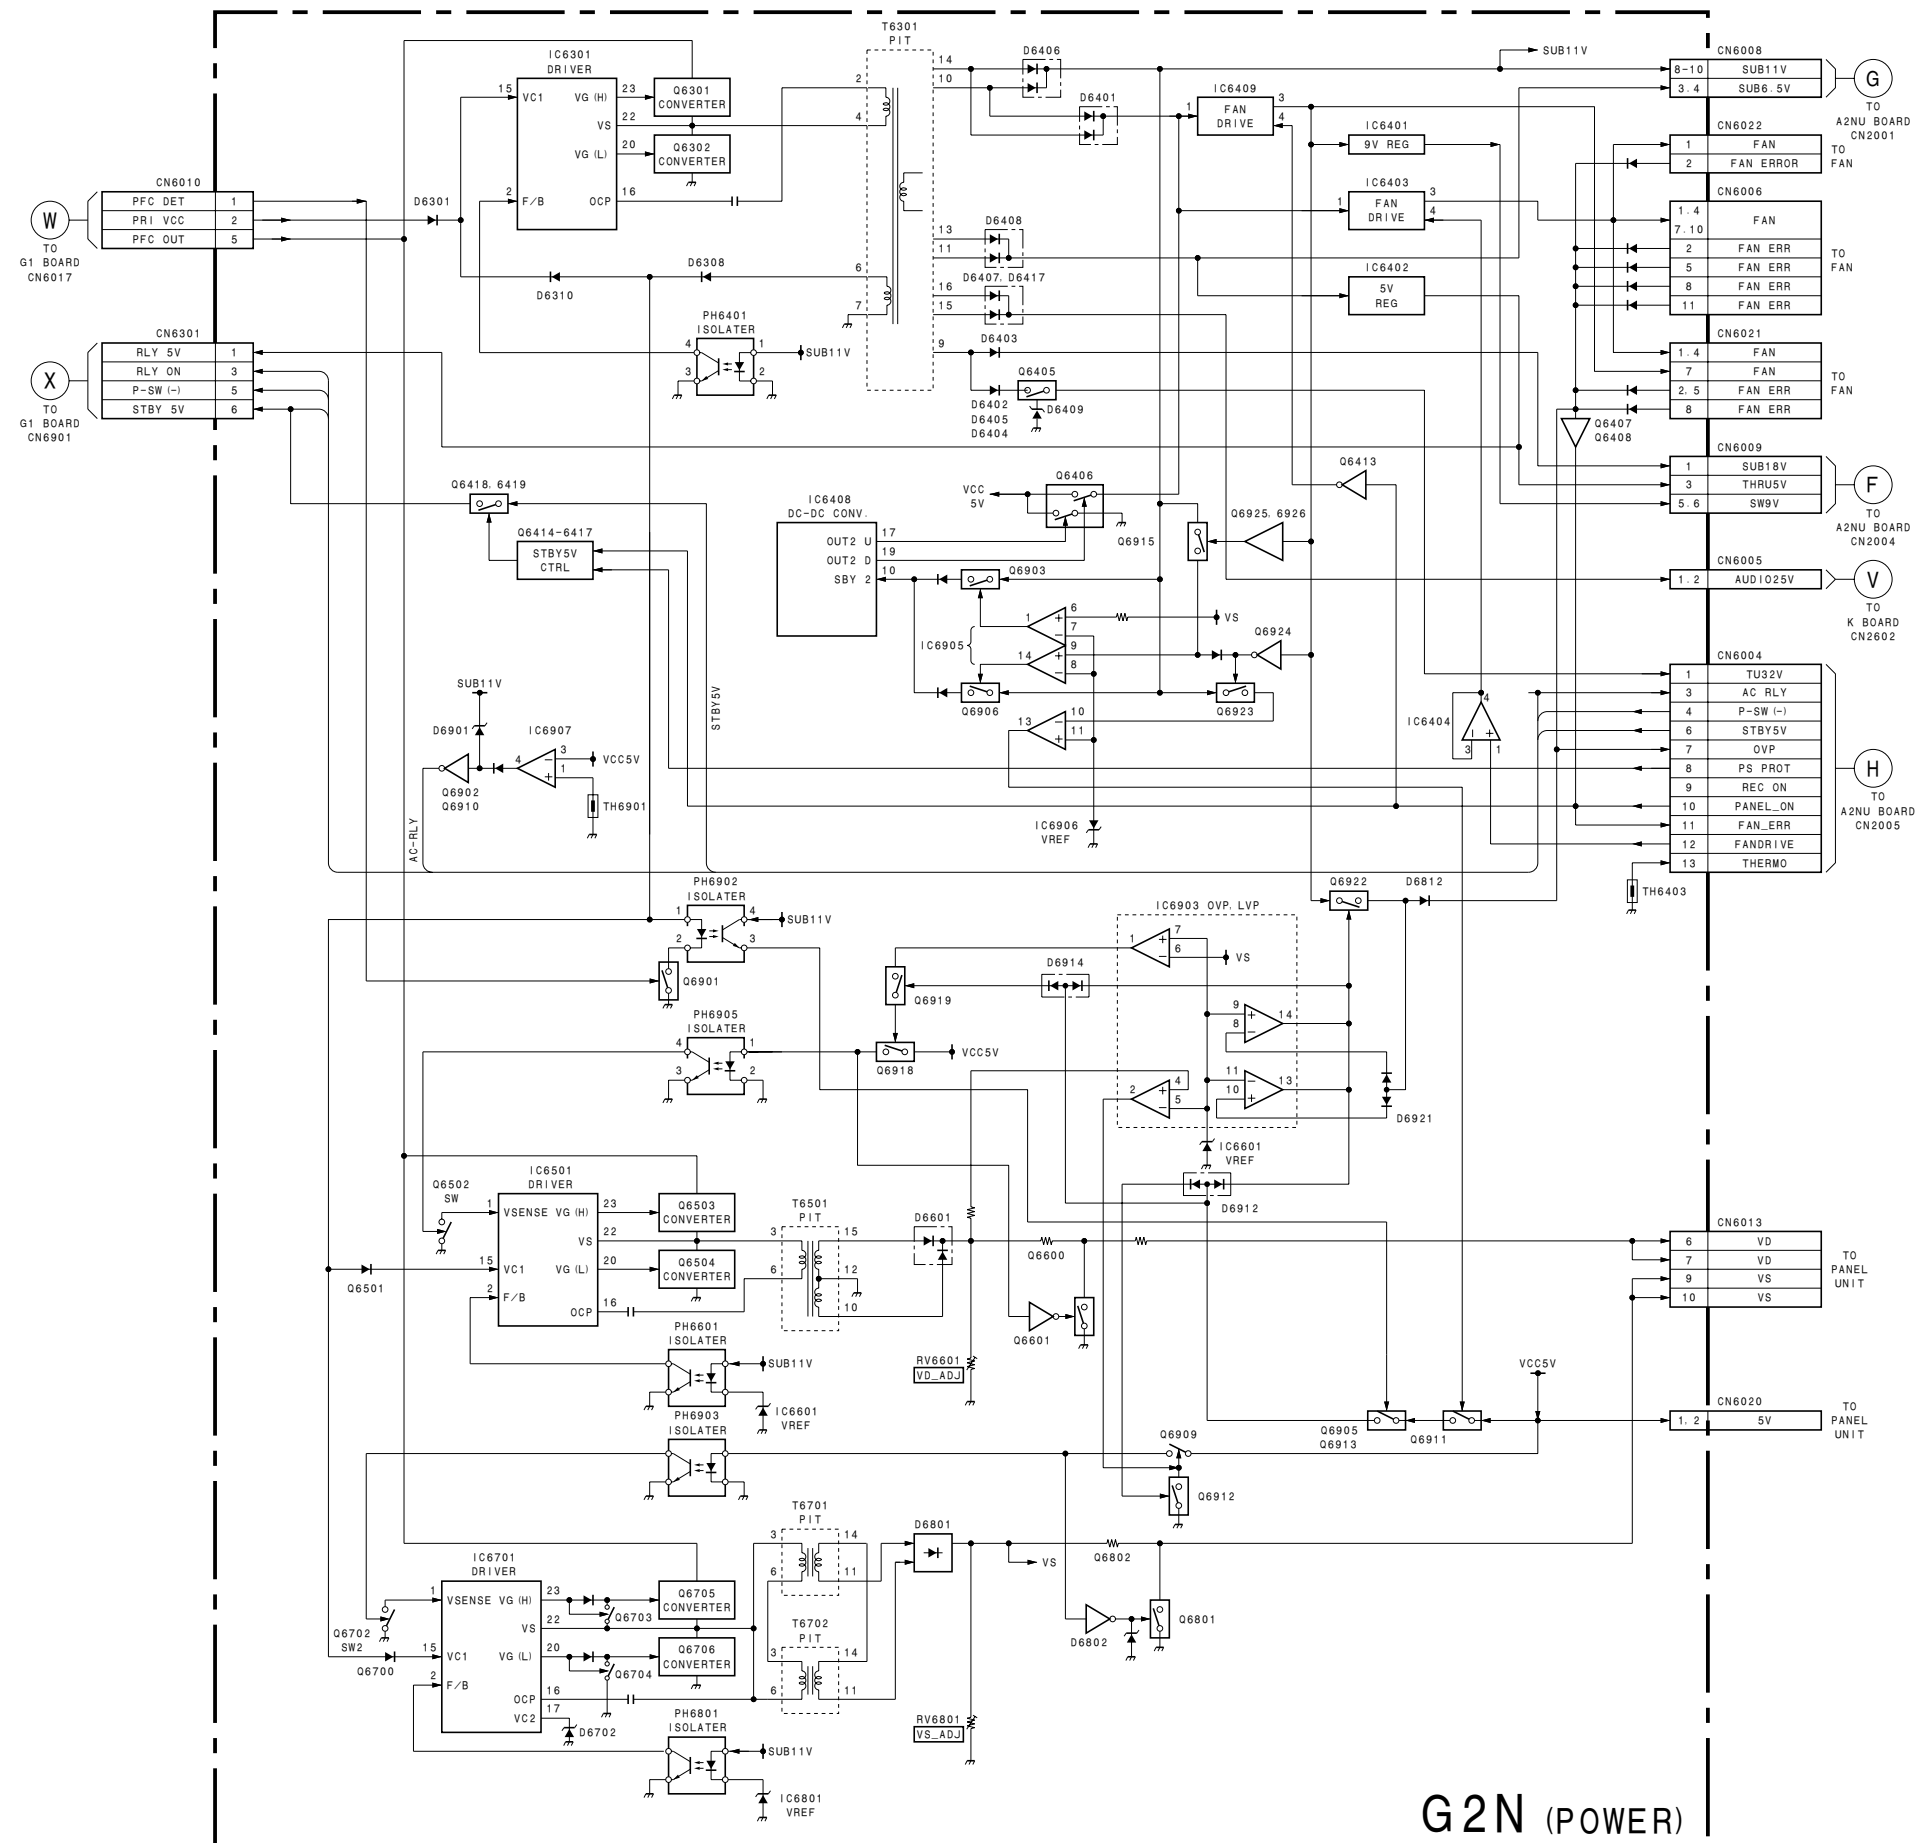


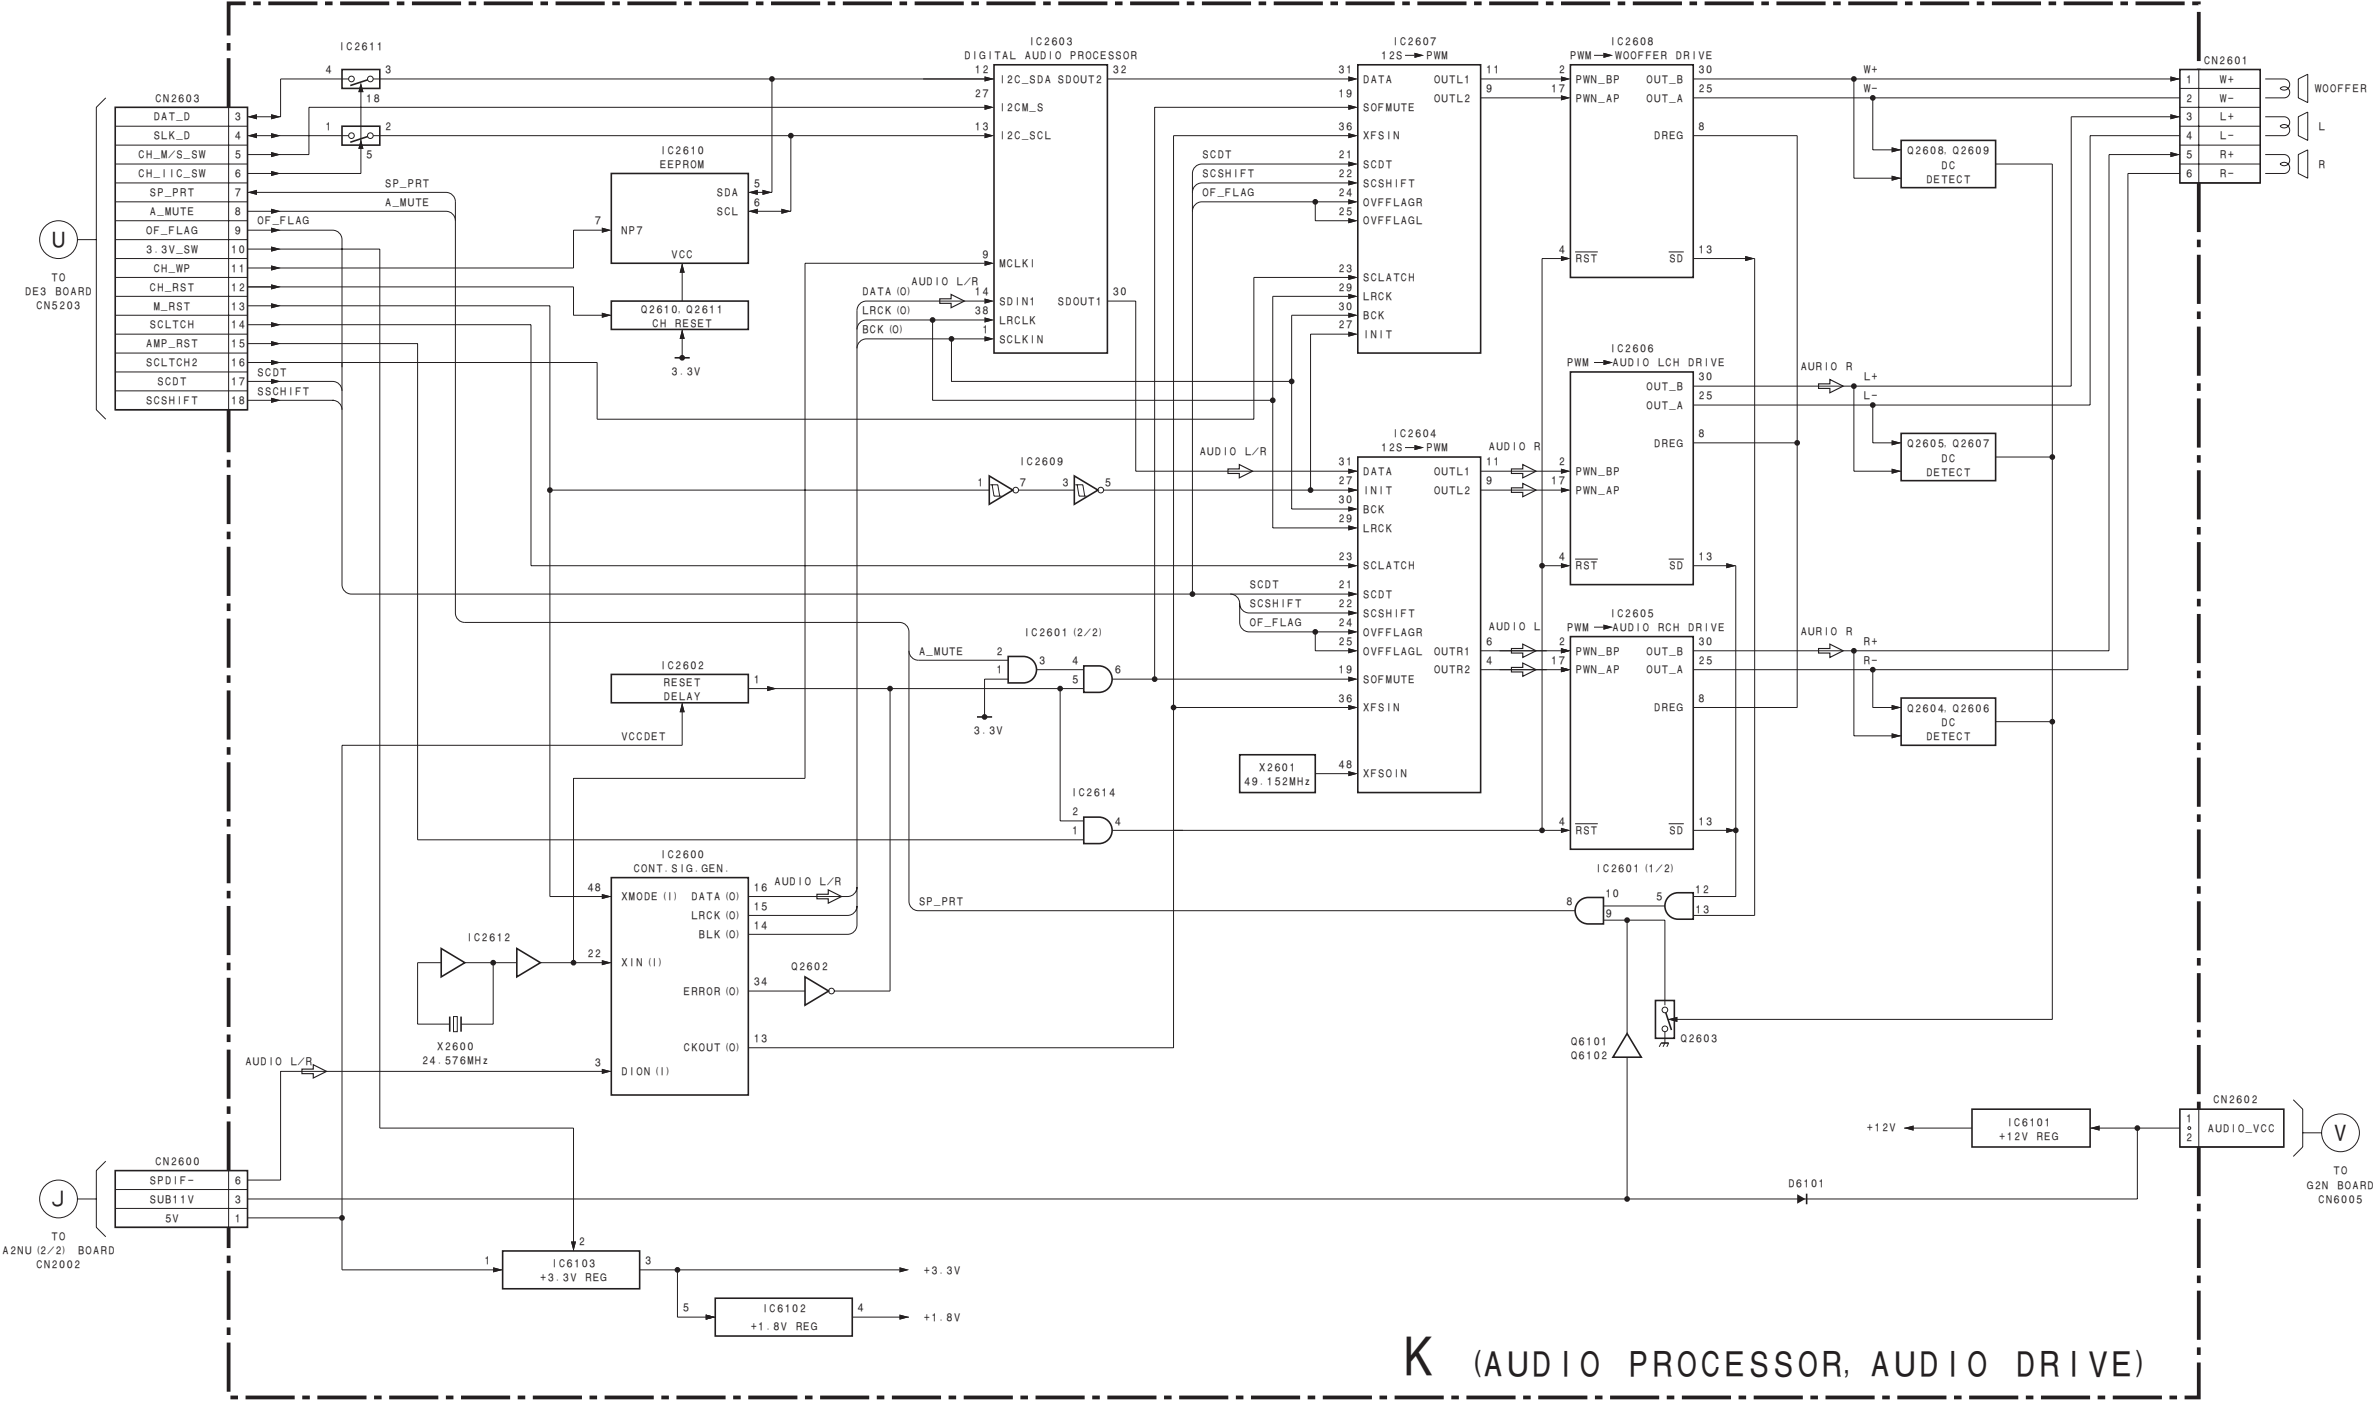


(9) H1U, H3, H5 AND M1U BOARDS

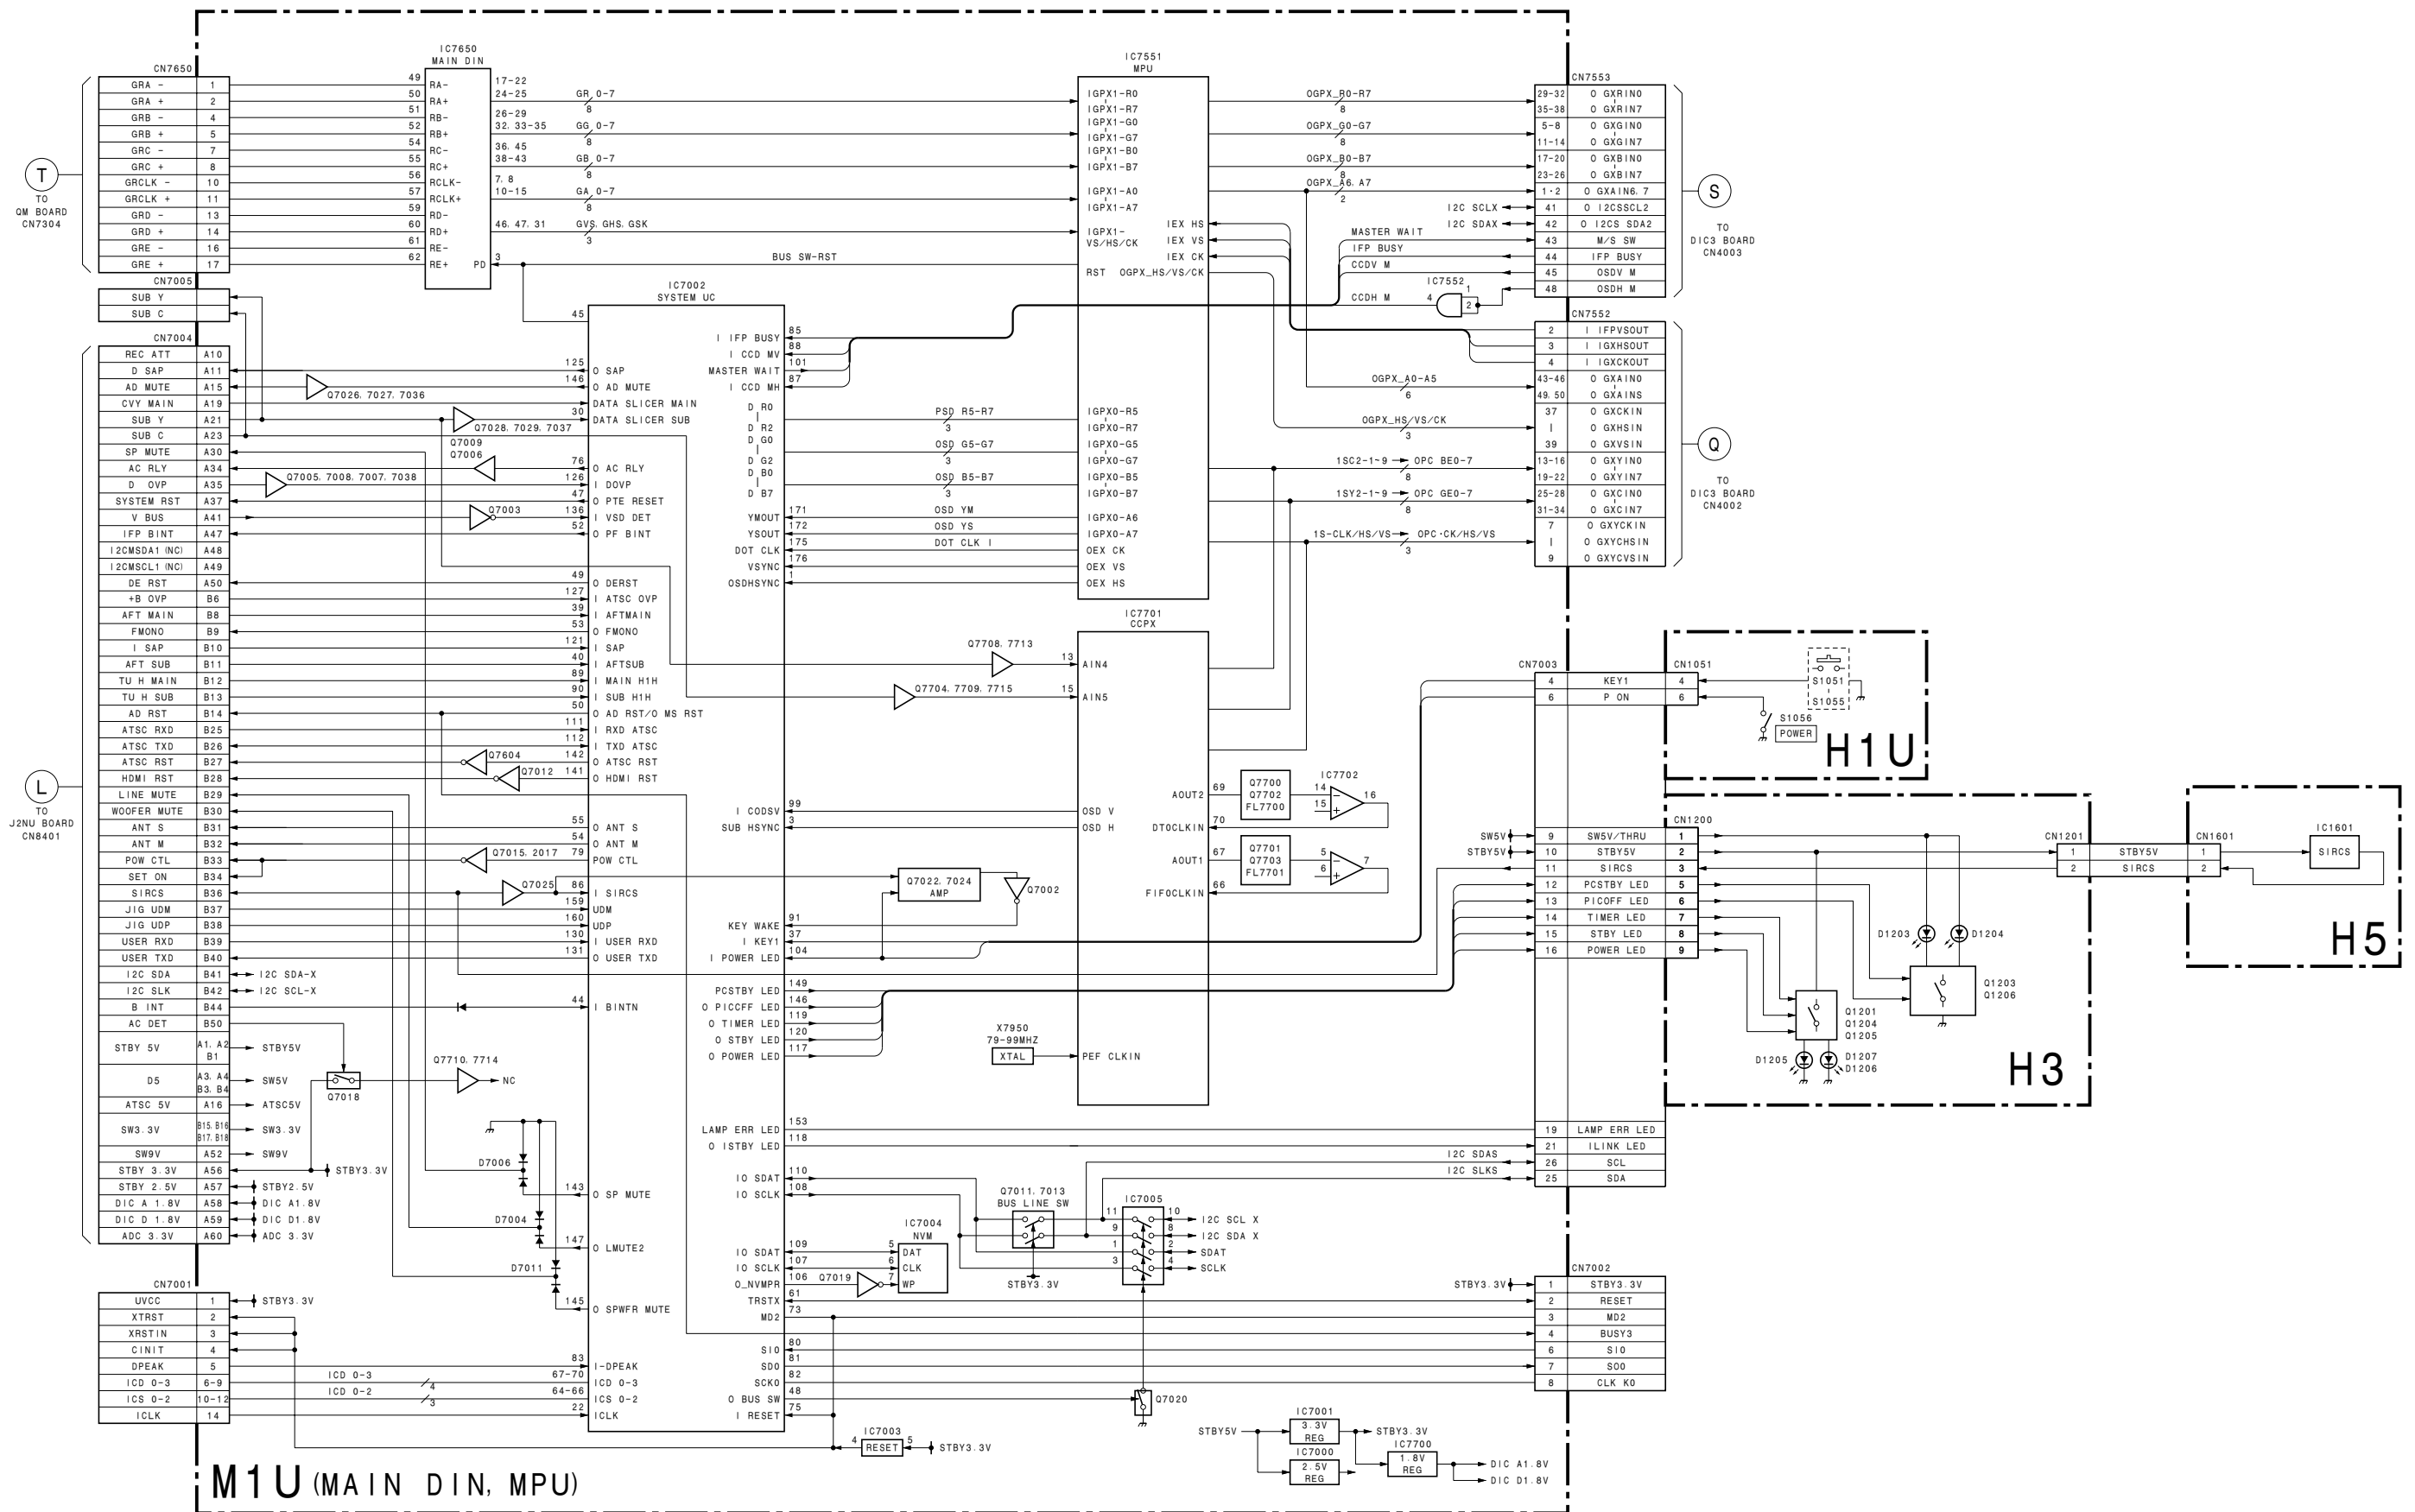


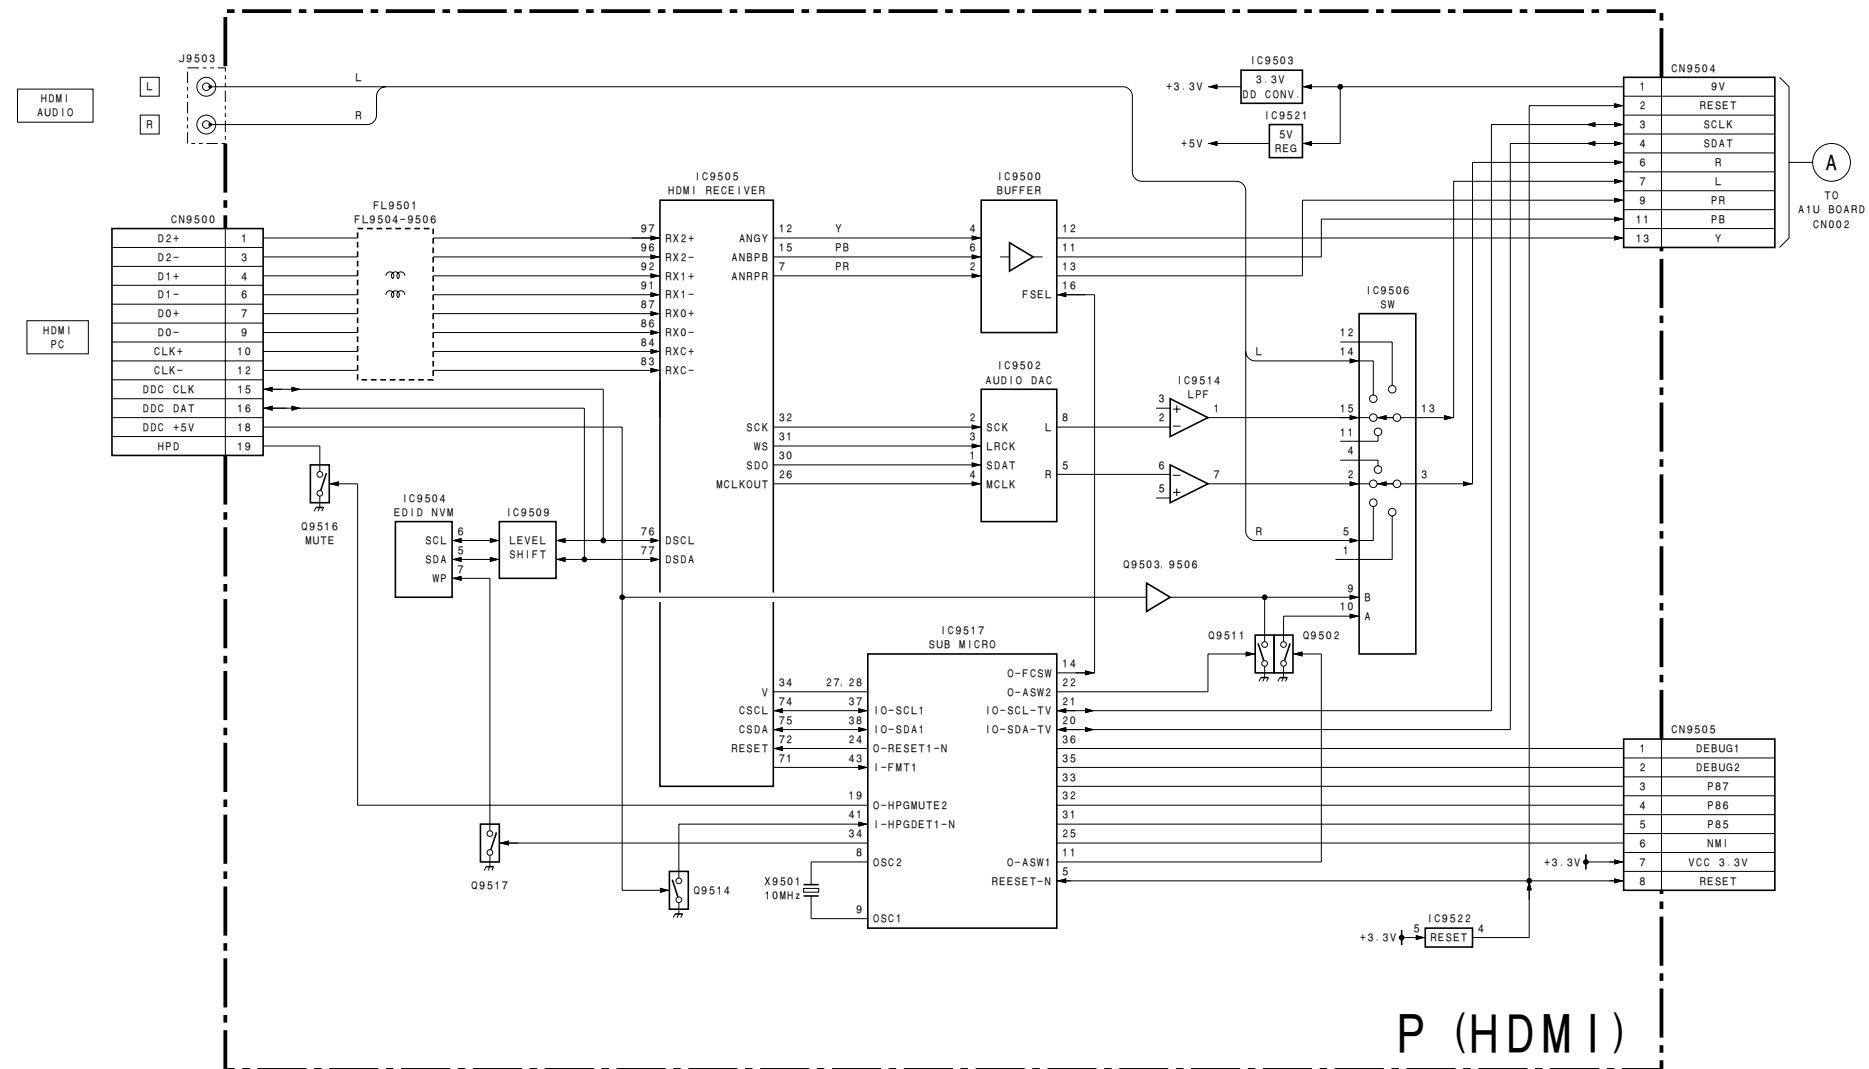

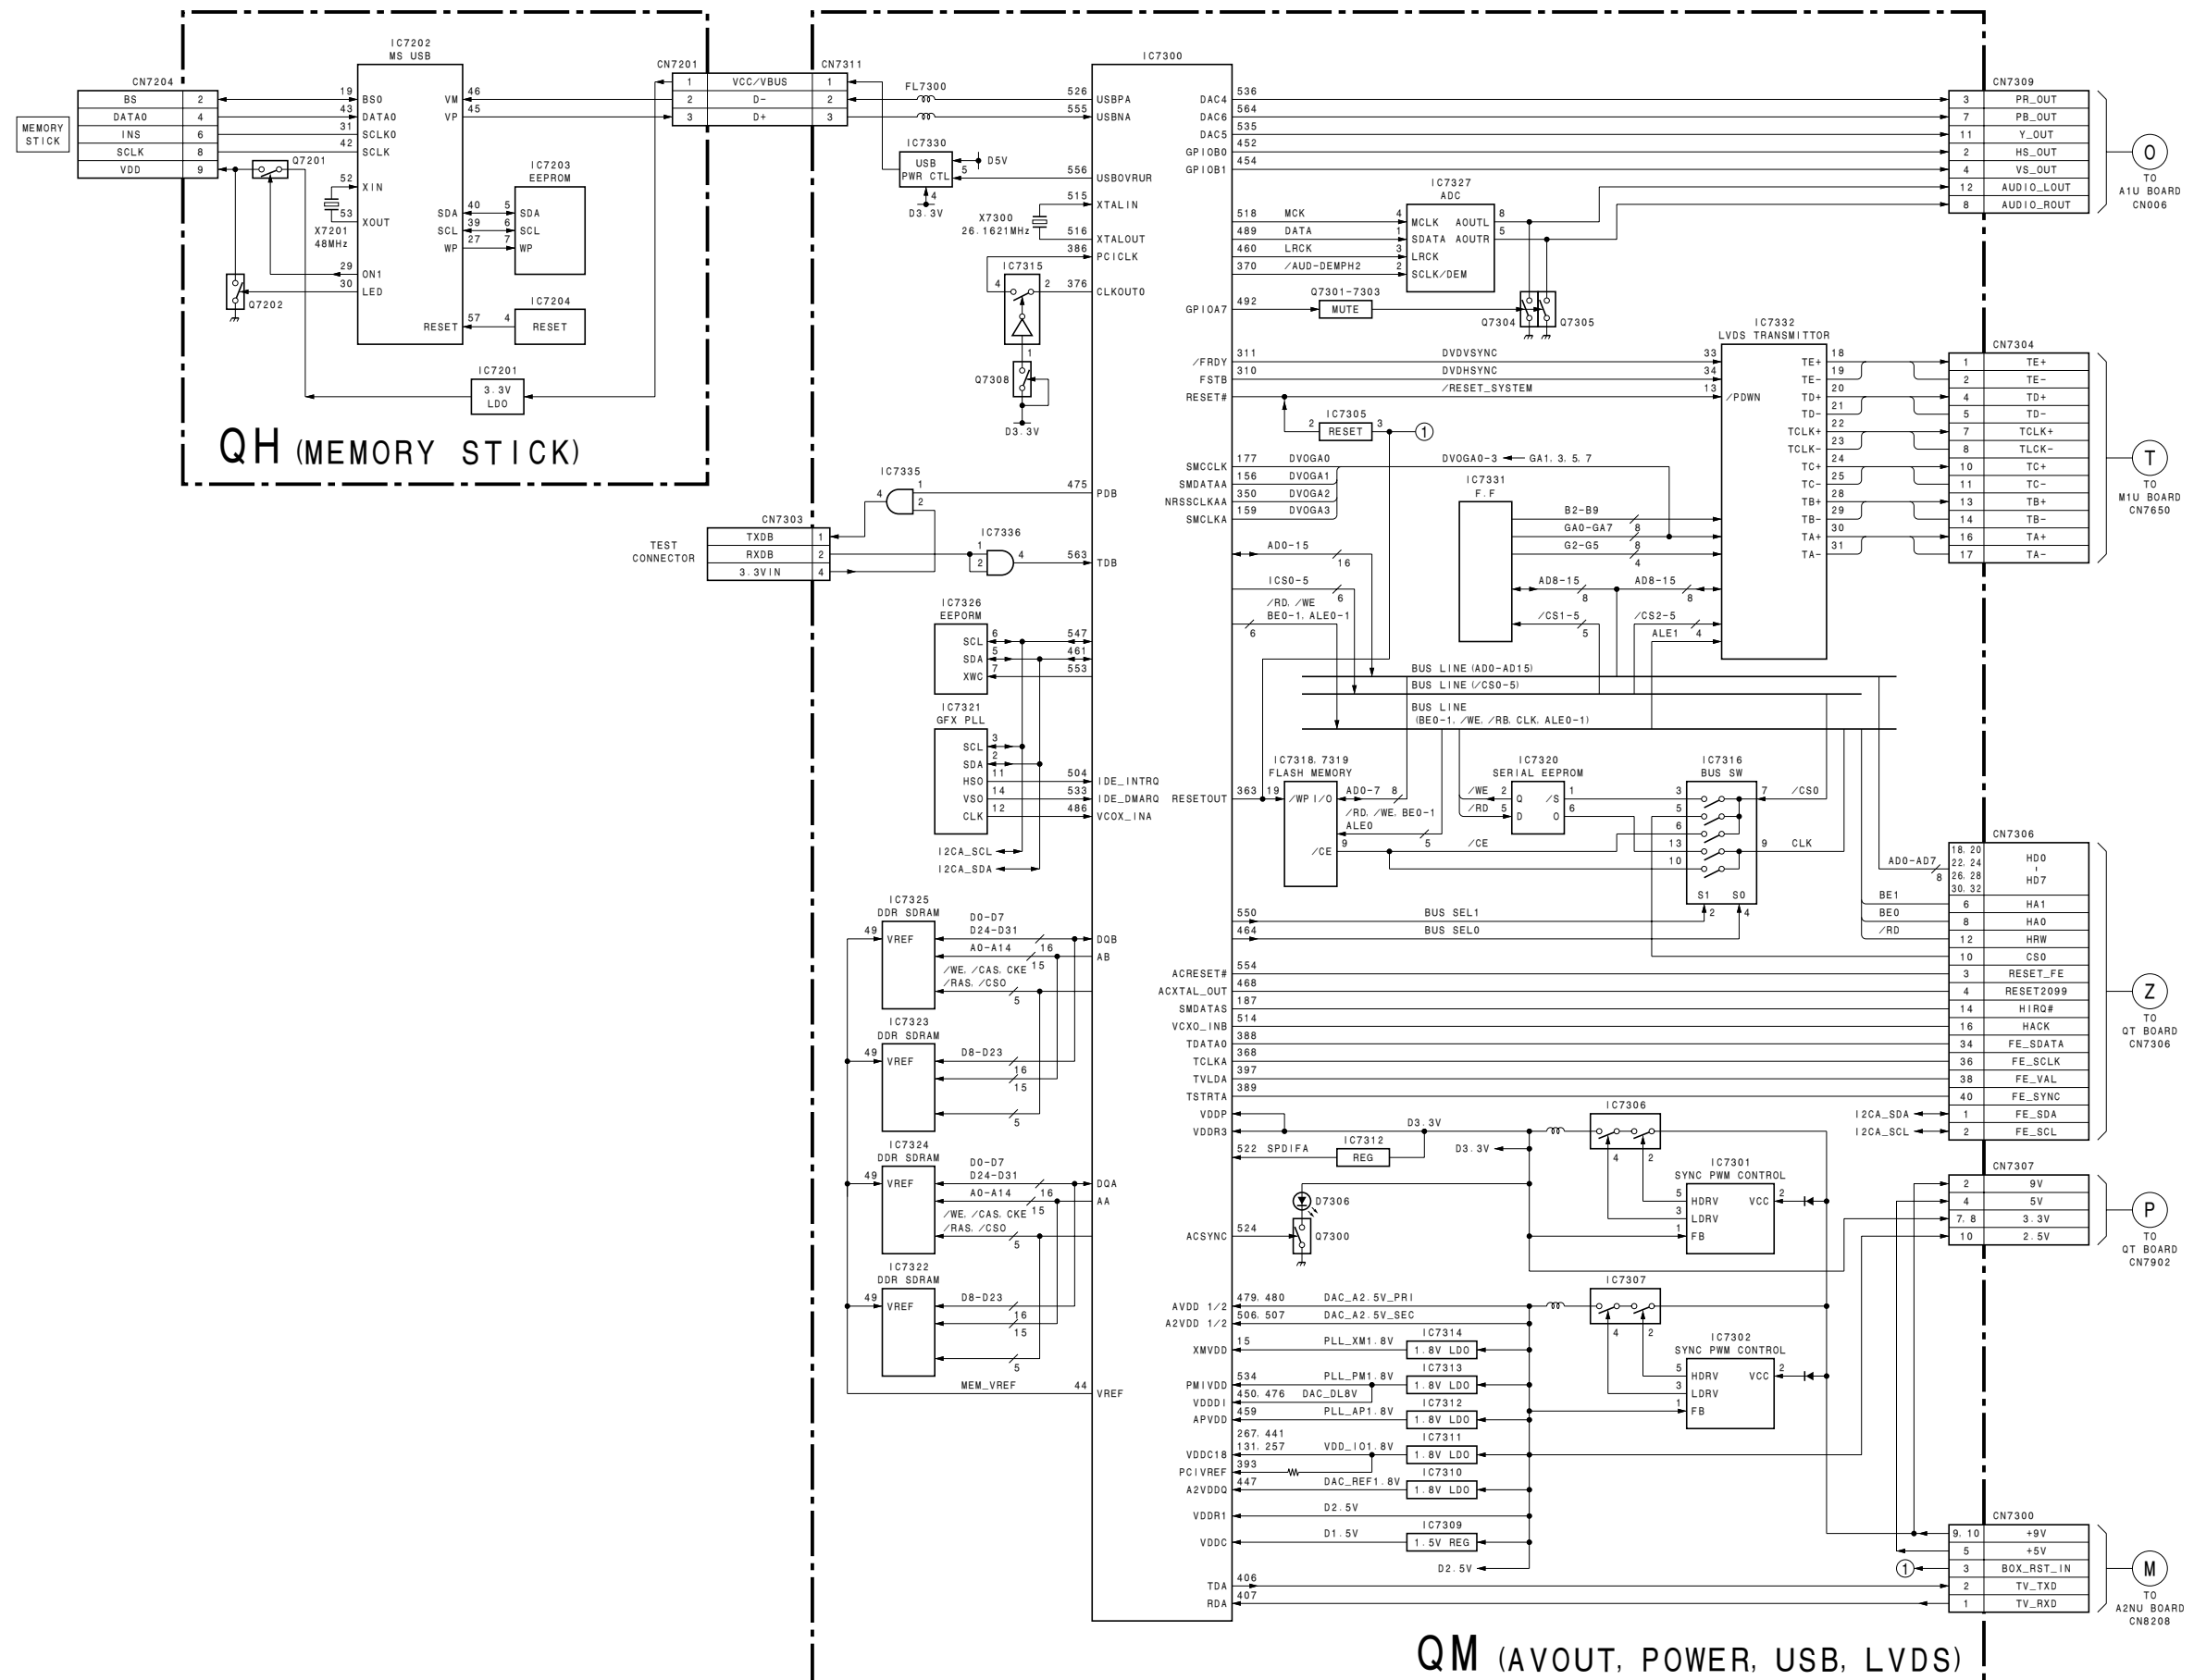


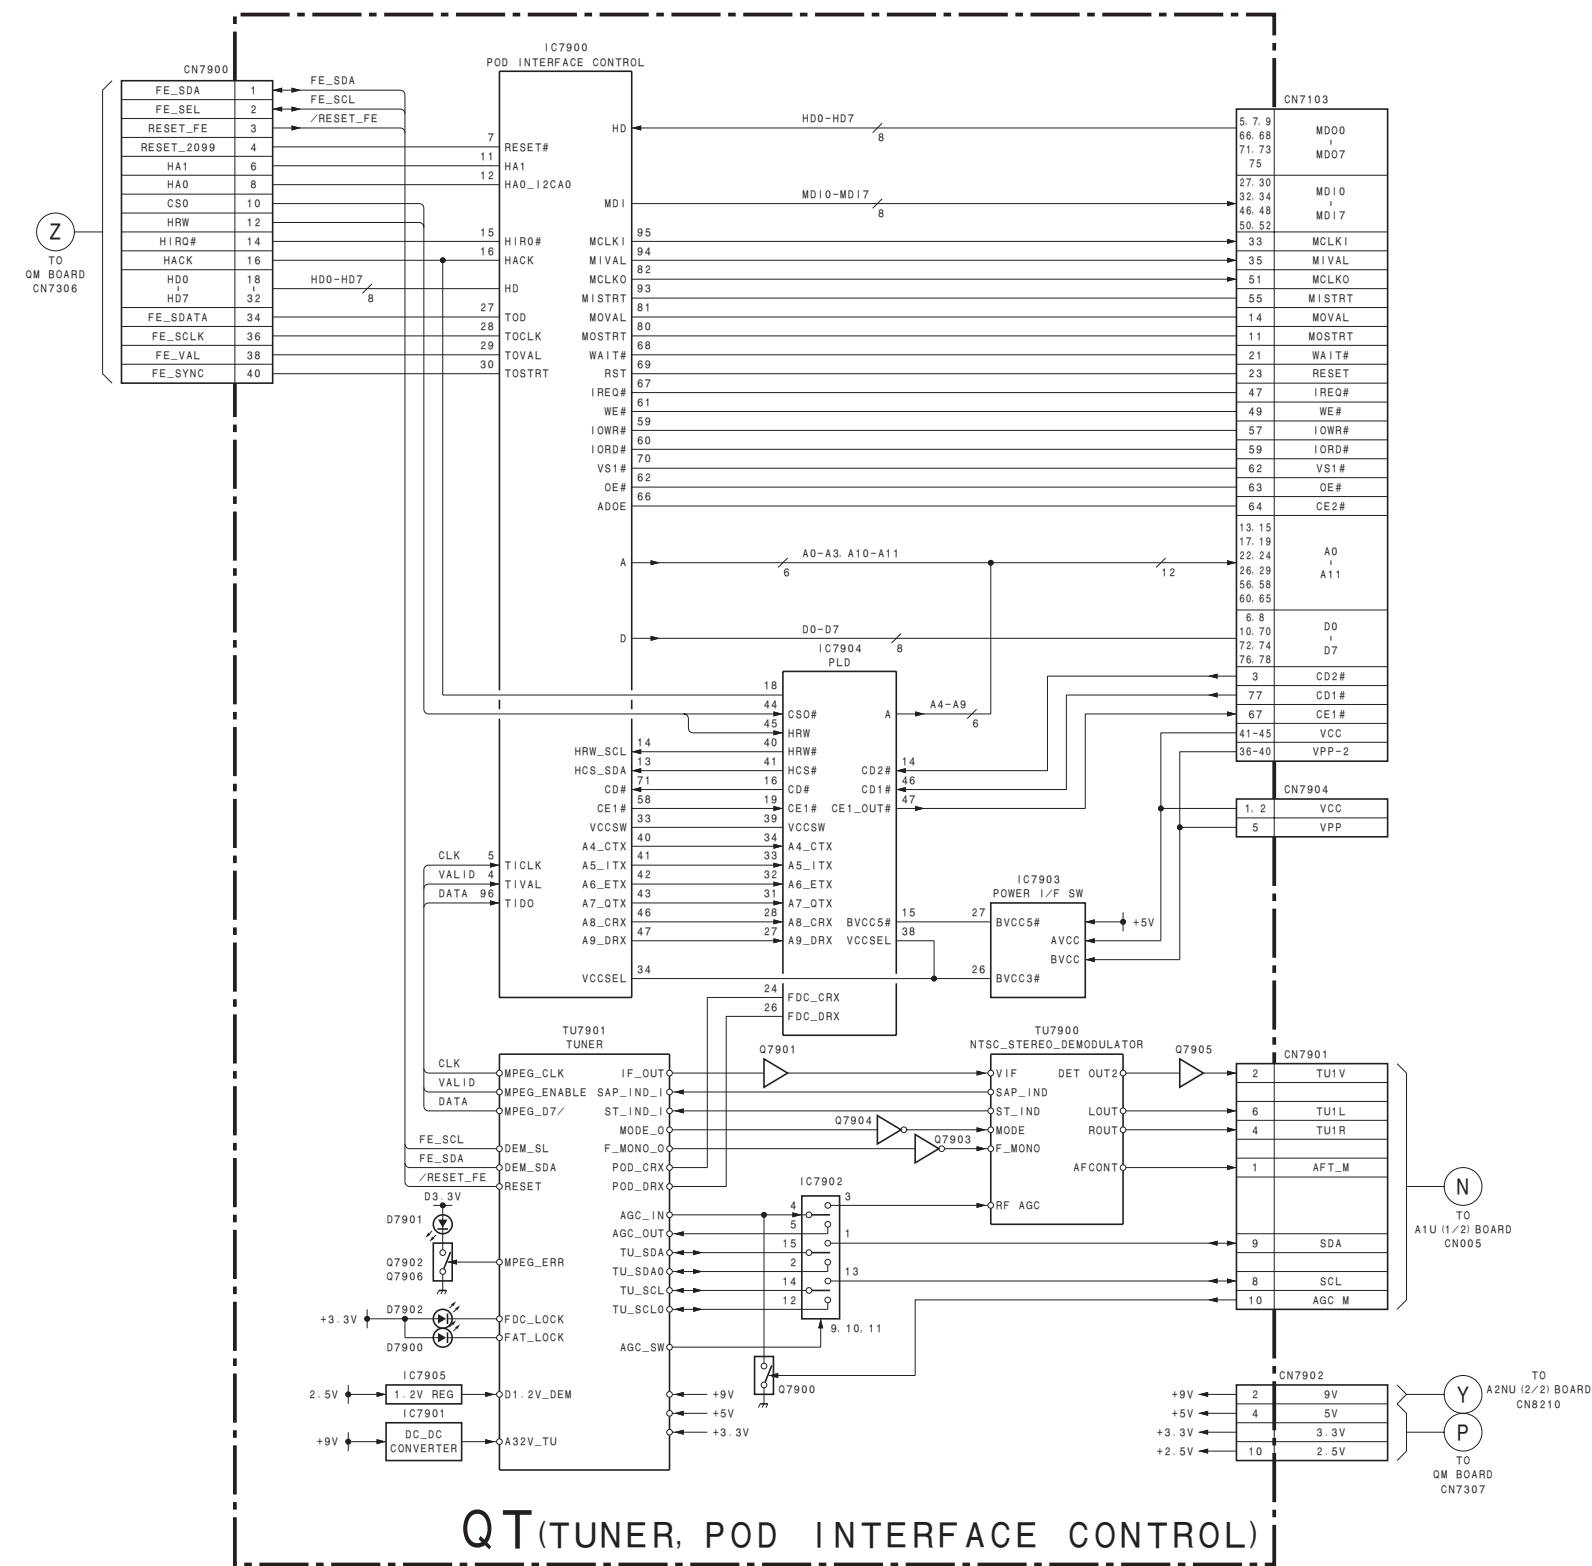

4-2. FRAME DIAGRAMS

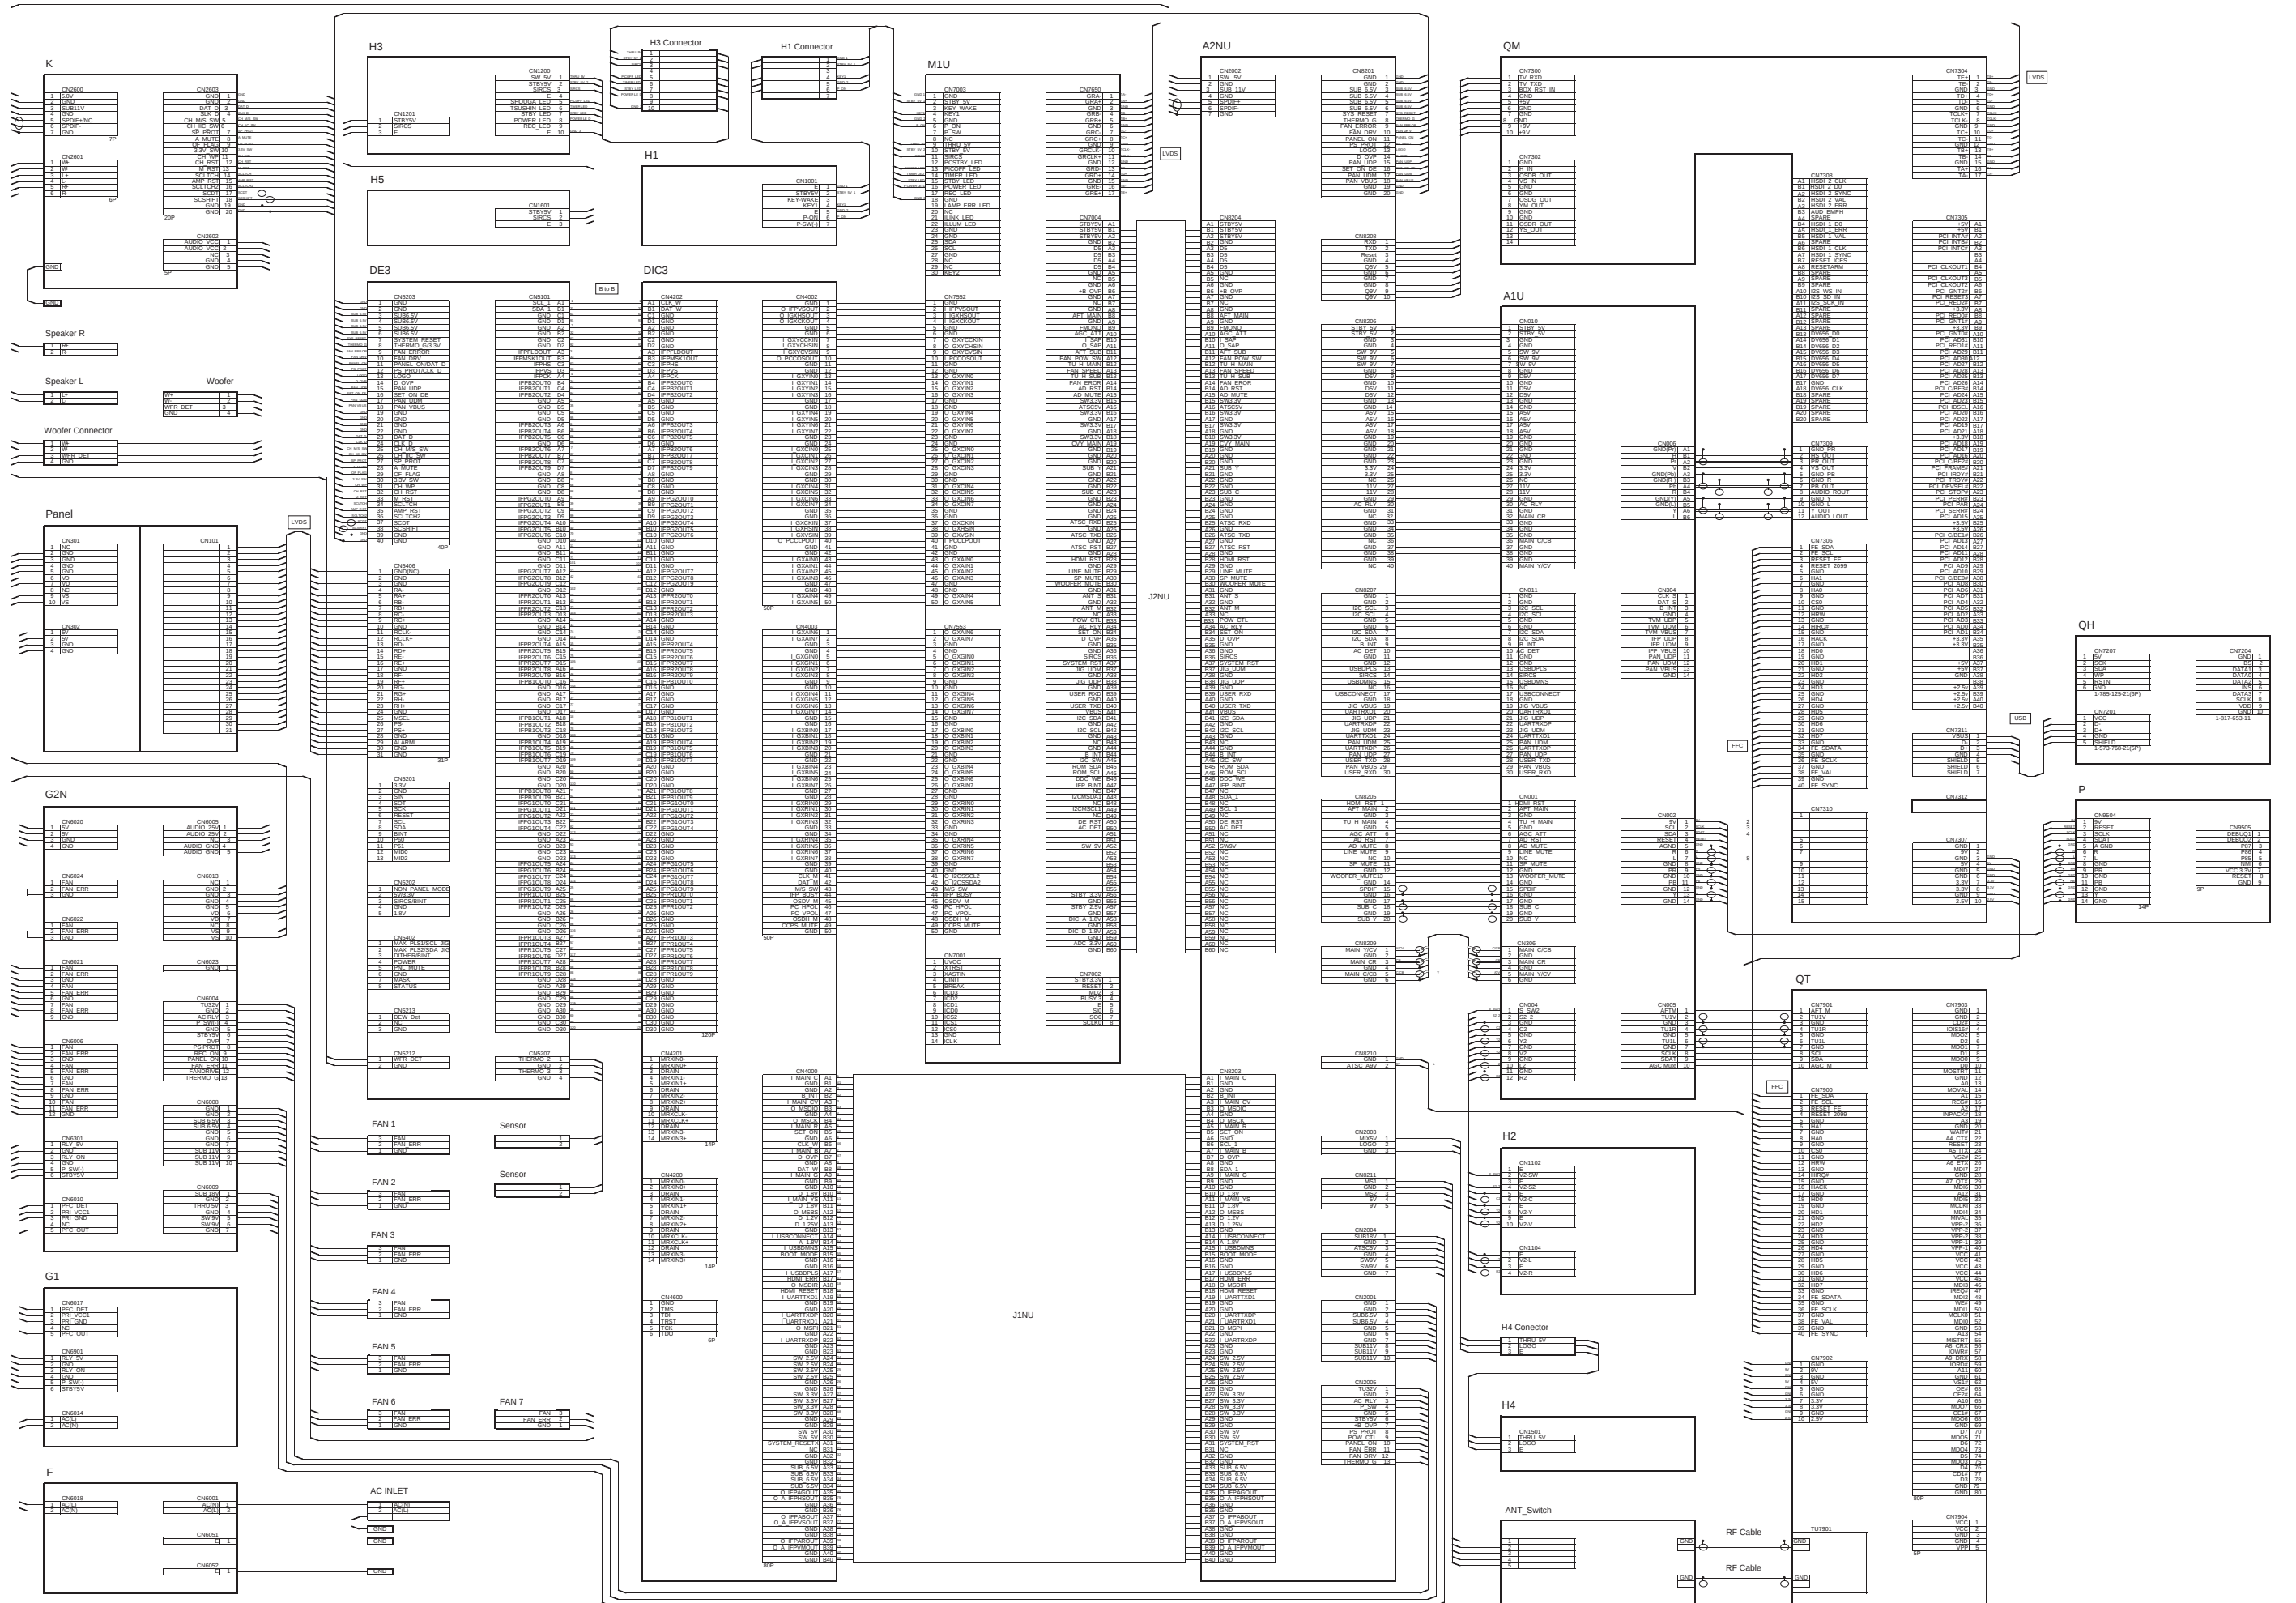

4-3. CIRCUIT BOARDS LOCATION

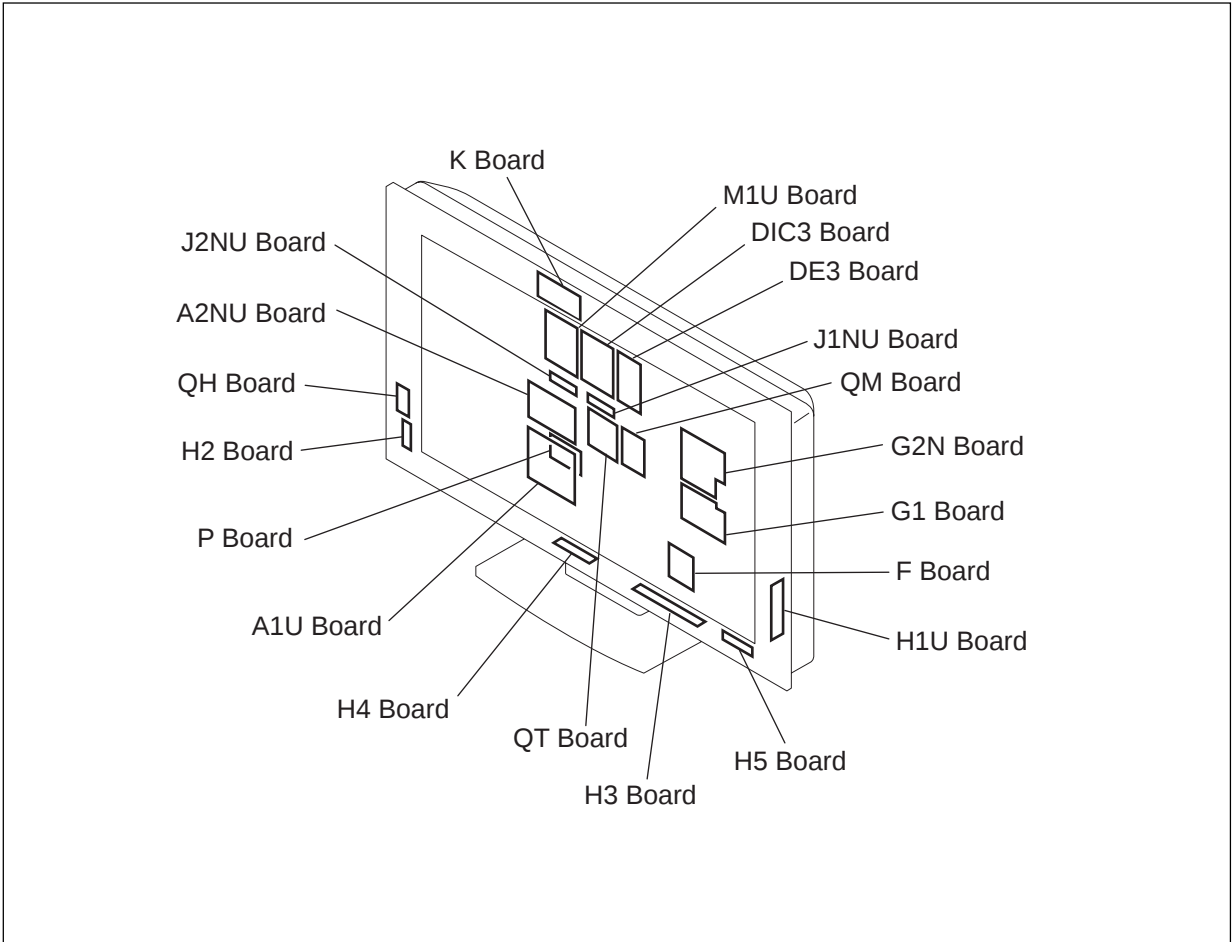

4-4. SCHEMATIC DIAGRAMS AND PRINTED WIRING BOARDS

- Note:**
- All capacitors are in μF unless otherwise noted. (pF: μF)
Capacitors without voltage indication are all 50 V.
 - Indication of resistance, which does not have one for rating electrical power, is as follows.

Pitch: 5 mm
Rating electrical power 1/4 W (CHIP : 1/10 W)
 - All resistors are in ohms.
 - : nonflammable resistor.
 - : fusible resistor.
 - : internal component.
 - : panel designation, and adjustment for repair.
 - All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
 - : earth-ground.
 - : earth-chassis.
 - When replacing the part in below table, be sure to perform the related adjustment.
 - All voltages are in V.
 - Readings are taken with a 10 M digital multimeter.
 - Readings are taken with a color-bar signal input.
 - Voltage variations may be noted due to normal production tolerances.
 - * : Names and values of parts depend on models.
 - * : Can not be measured.
 - Circled numbers are waveform references.
 - : B + bus.
 - : B – bus.
 - : Signal path.

Note: The components identified by shading and mark are critical for safety. Replace only with part number specified.

Note: Les composants identifiés par un tramé et une marque sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

Terminal name of semiconductors in silk screen printed circuit (✱)


	Device	Printed symbol	Terminal name	Circuit
①	Transistor		Collector Base Emitter	
②	Transistor		Collector Base Emitter	
③	Diode		Cathode Anode	
④	Diode		Cathode Anode (NC)	
⑤	Diode		Cathode Anode (NC)	
⑥	Diode		Common Anode Cathode	
⑦	Diode		Common Anode Cathode	
⑧	Diode		Common Anode Anode	
⑨	Diode		Common Anode Anode	
⑩	Diode		Common Cathode Cathode	
⑪	Diode		Common Cathode Cathode	
⑫	Diode		Anode Anode Cathode Anode	
⑬	Transistor (FET)		Drain Source Gate	
⑭	Transistor (FET)		Drain Source Gate	
⑮	Transistor (FET)		Source Drain Gate	
⑯	Transistor		Emitter Collector Base	
⑰	Transistor		C2/B3/E1 E2/B2/C1	
⑱	Transistor		C1/B2/E2 E1/B1/C2	
⑲	Transistor		C1 B2 E2 E1 B1 C2	
⑳	Transistor		C1 B2 E2 E1 B1 C2	
㉑	Transistor		E2 B1 E1 C2 C1(B2)	
㉒	Transistor		(B2) B1 E1 E2 C1 C2	
㉓	Transistor		(B2) E2 E1 B1 C2 C1	
—	Discrete semiconductot			


(Chip semiconductors that are not actually used are included.)

Ver.1.6

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----






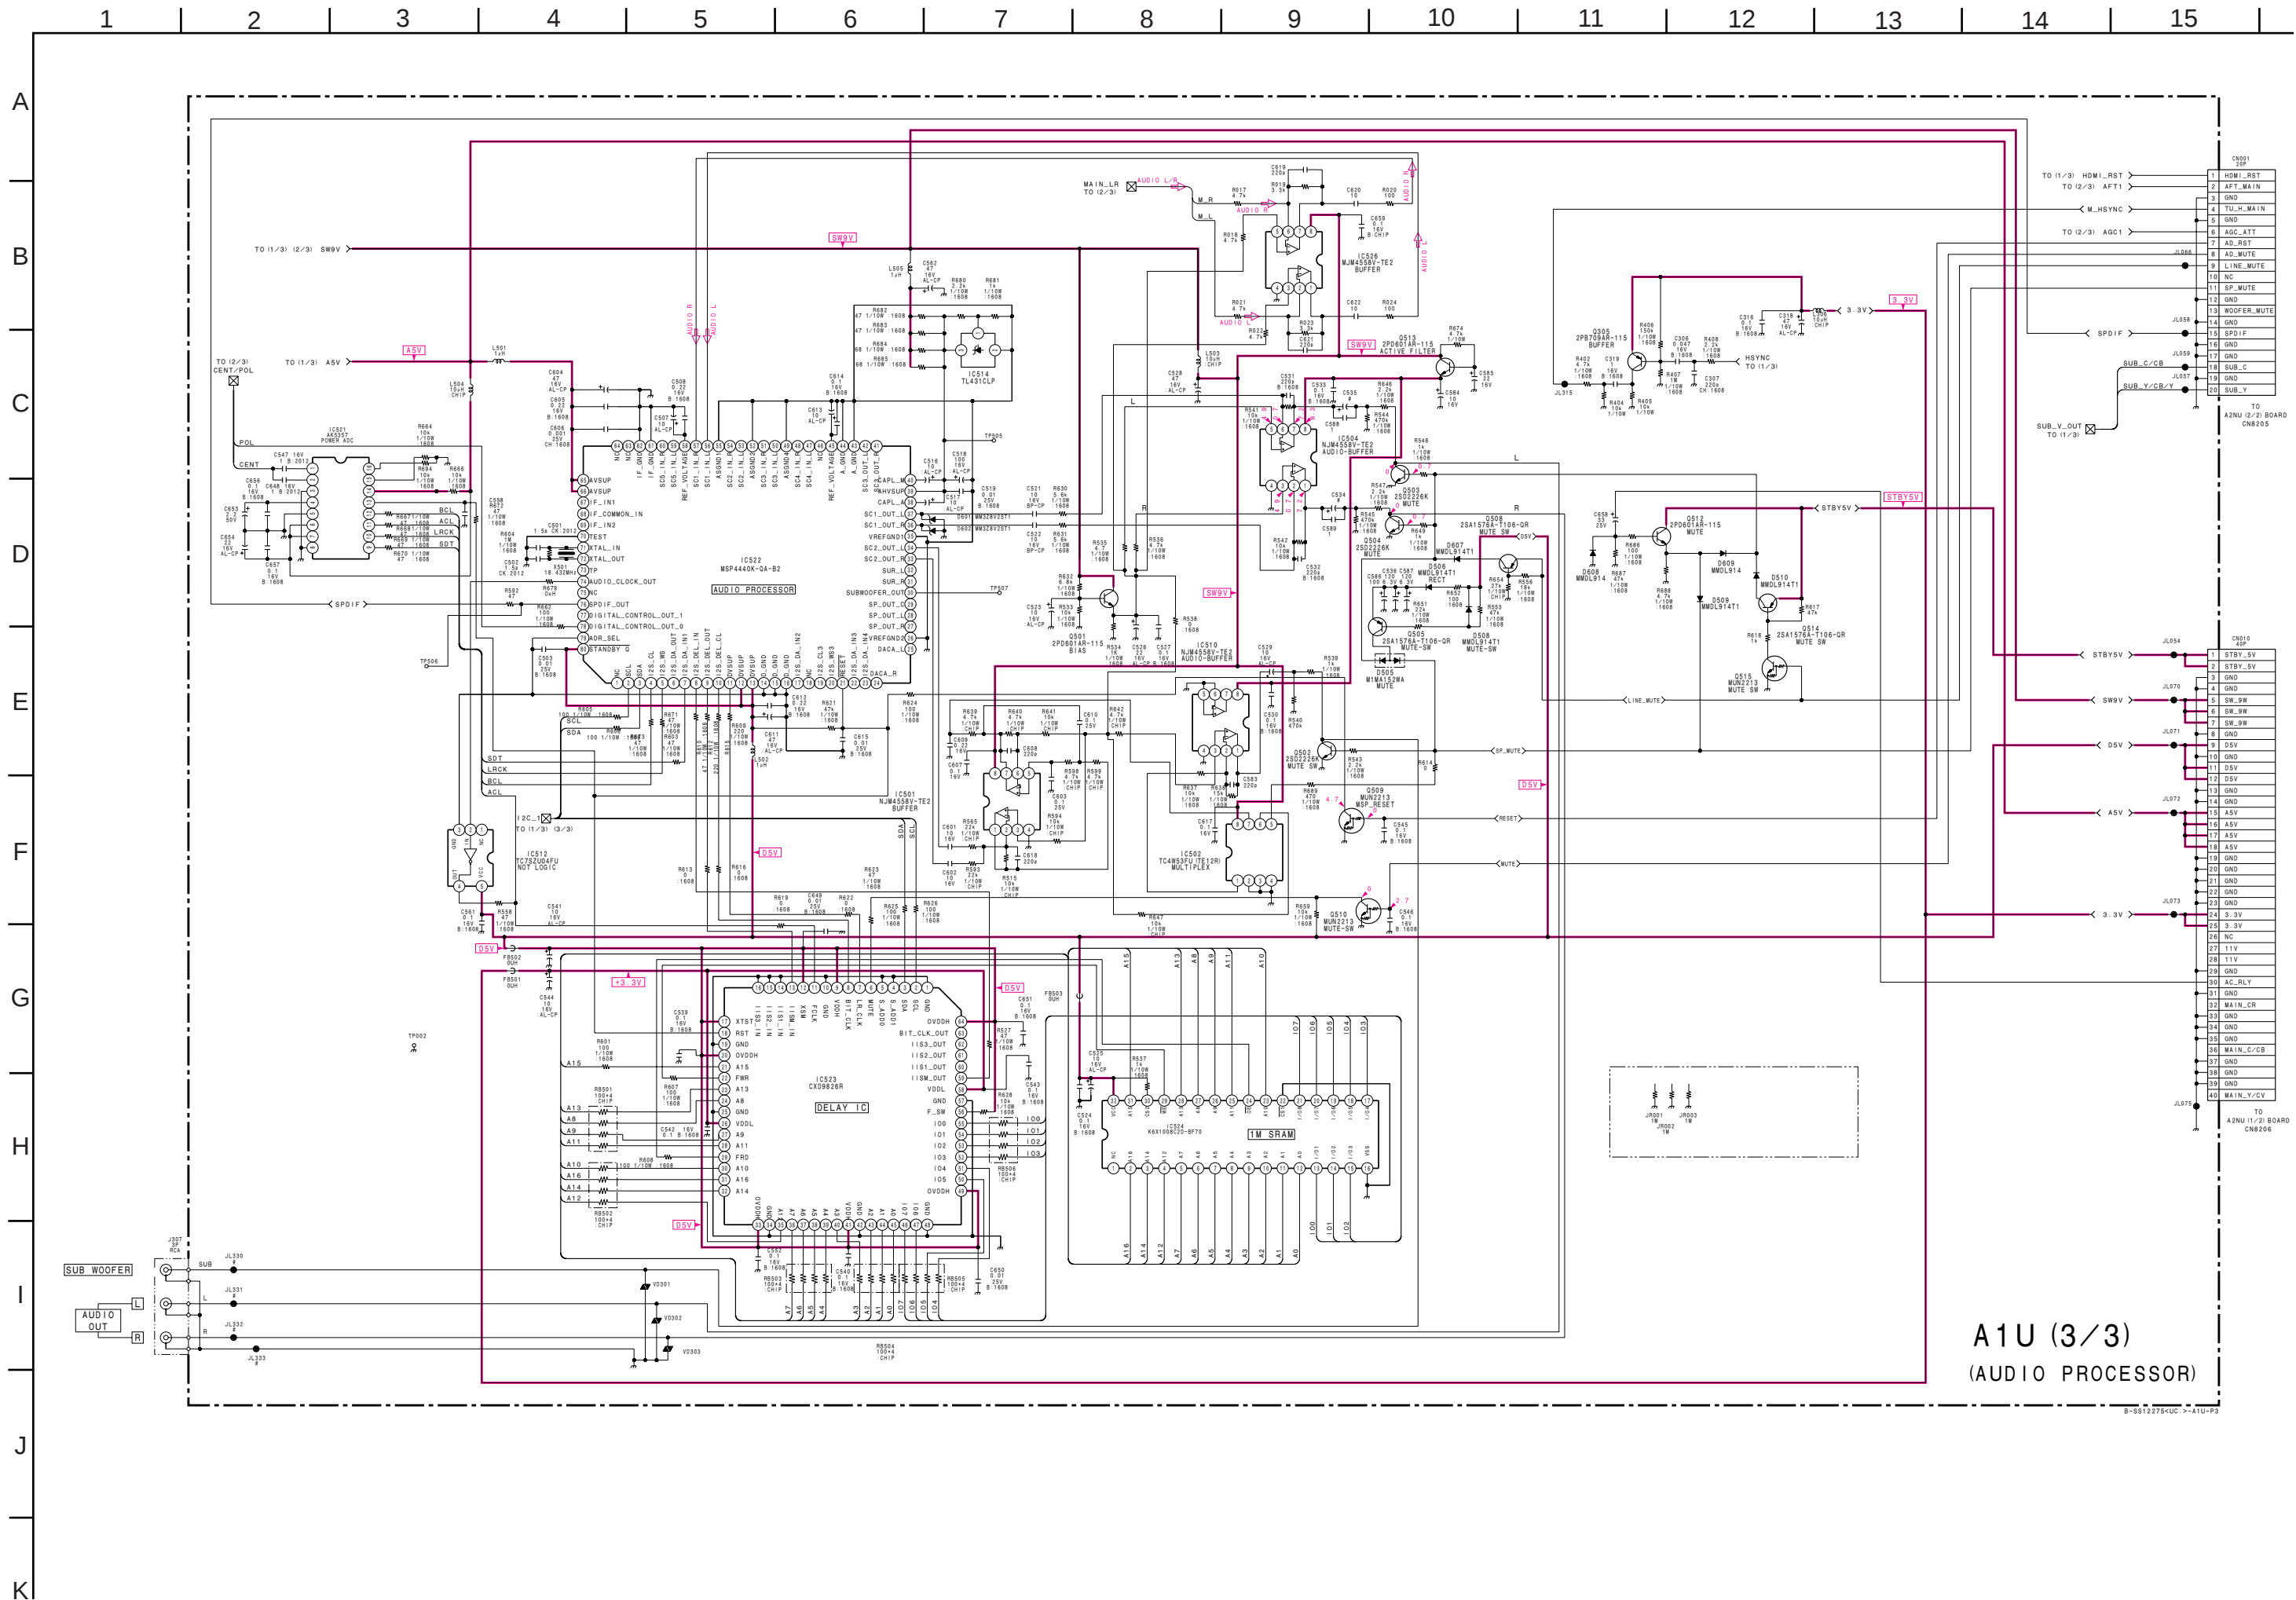


[AUDIO SW, AUDIO PROCESSOR, VIDEO SW, INPUT TERMINAL]

[AUDIO SW, AUDIO PROCESSOR, VIDEO SW, INPUT TERMINAL]


— A1U BOARD —

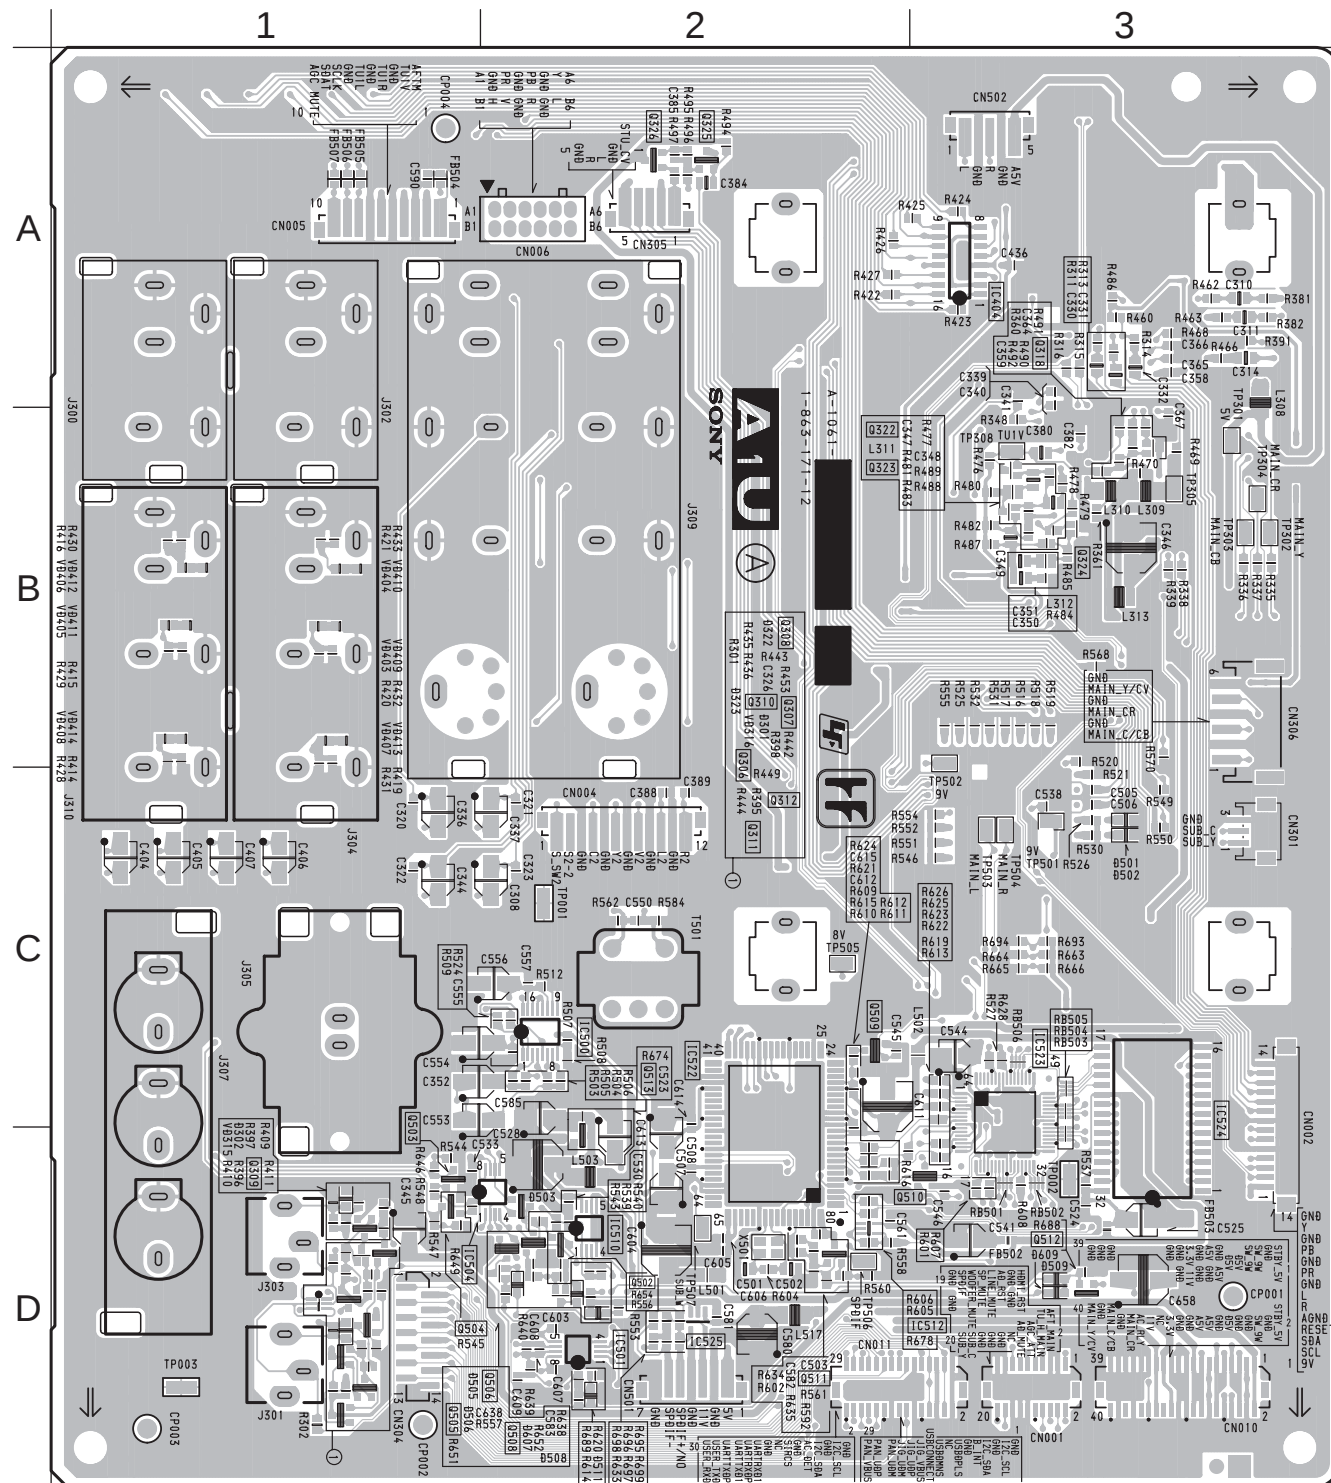

(2) Schematic Diagrams of A2NU Board

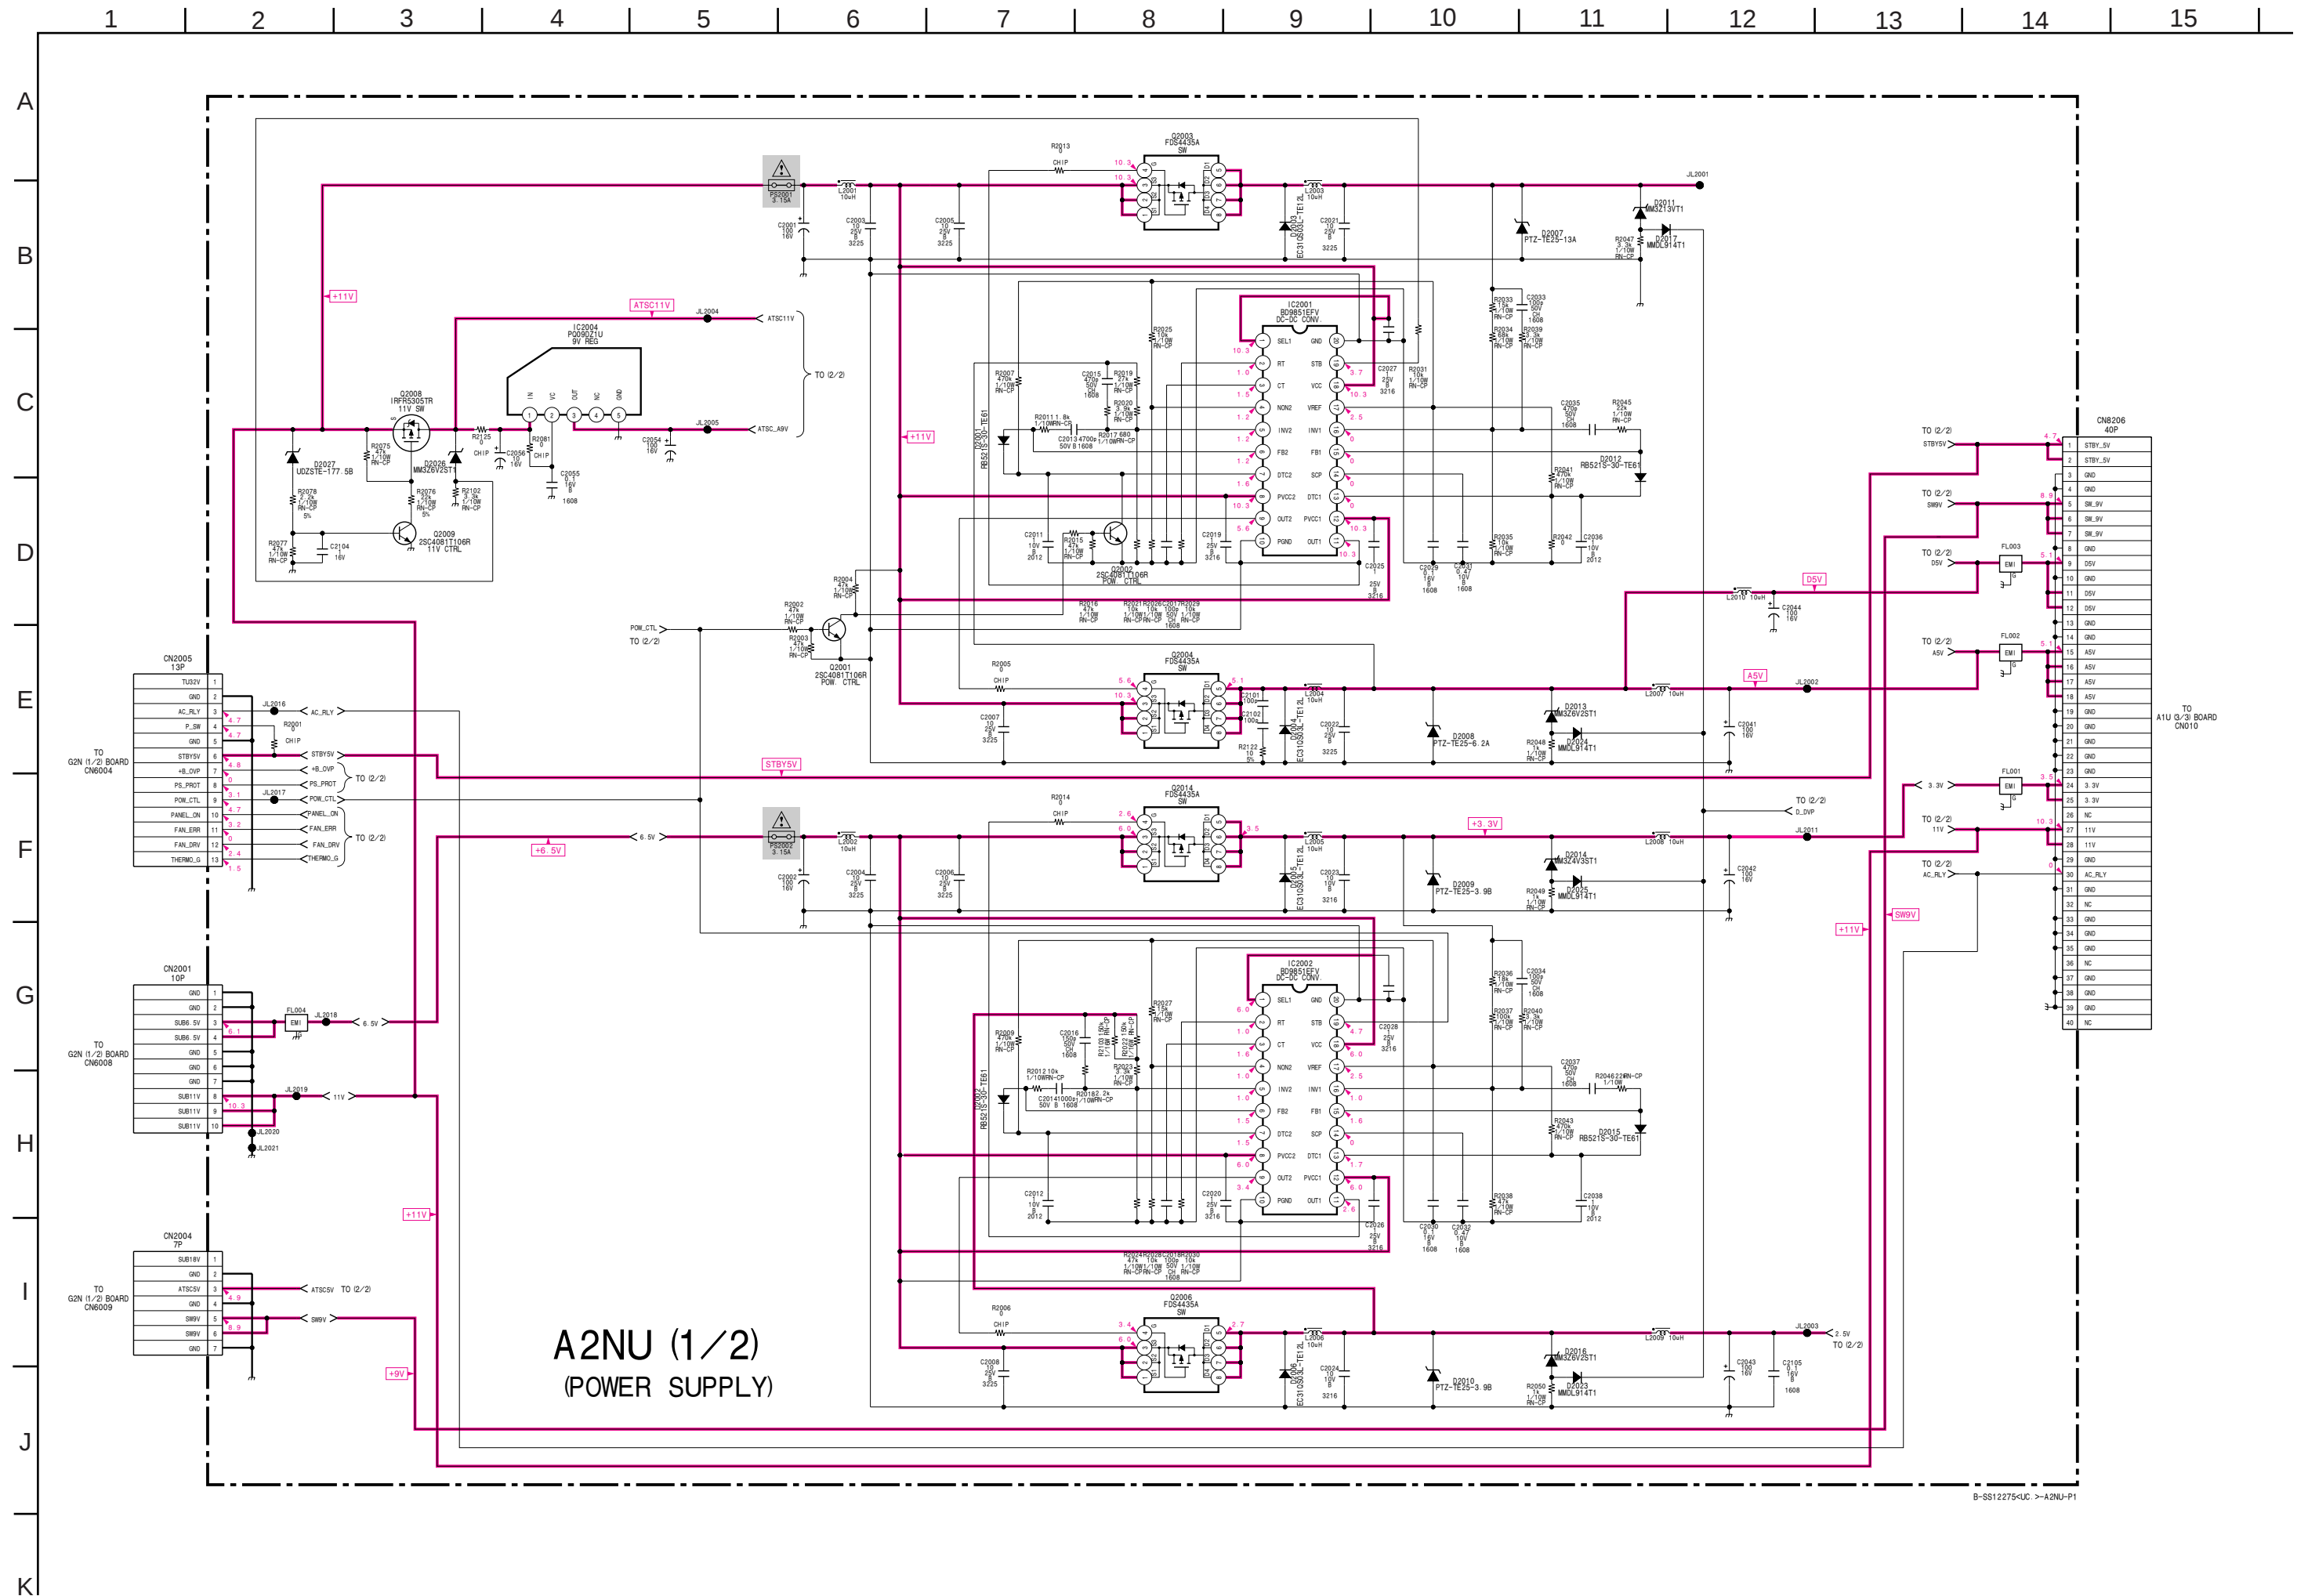


B-SS12275-UC -> A2NU-P1




A2NU

[POWER SUPPLY, RELAY BOARD]

— A2NU BOARD —

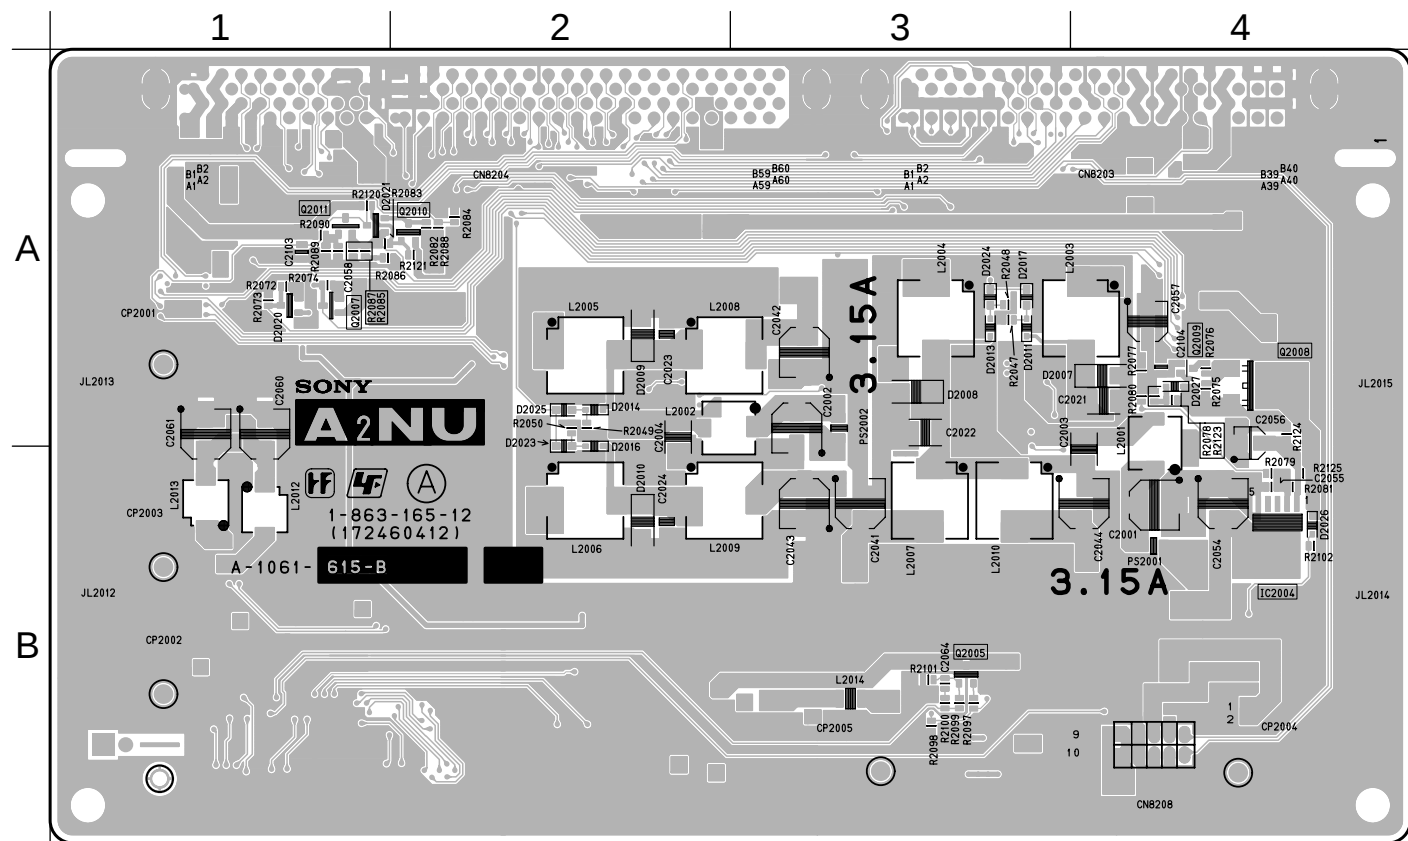

<COMPONENT SIDE>

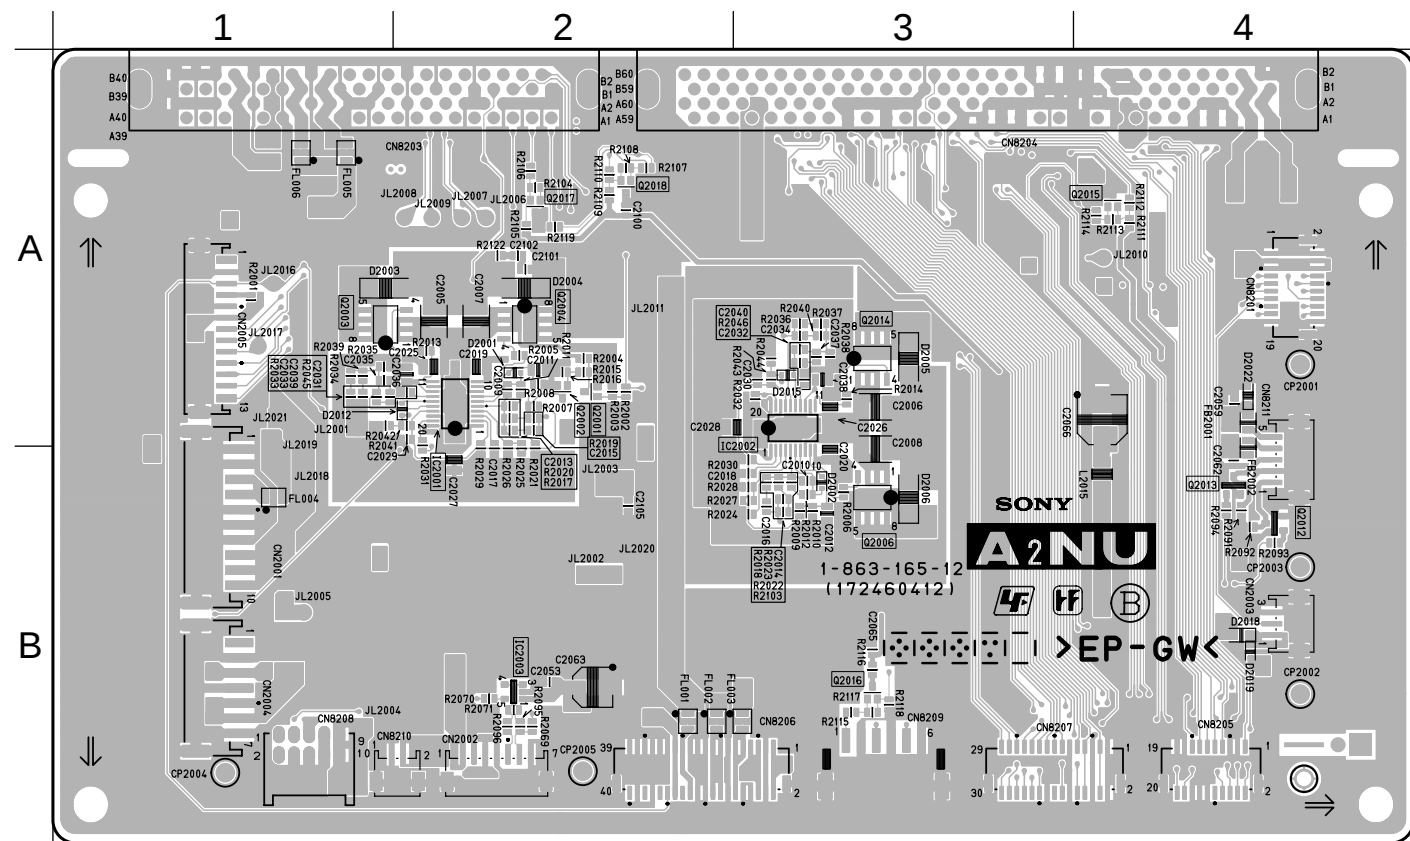

<CONDUCTOR SIDE>

• A2NU BOARD SEMICONDUCTOR LOCATION


IC							
(Component Side)	(Conductor Side)						
IC2001	A-2	Q2010	A-2	②	D2008	A-3	③
IC2002	A-3	Q2011	A-1	②	D2009	A-2	③
IC2003	B-2	Q2012		②	D2010	B-2	③
IC2004	B-4	Q2013	B-4	②	D2011	A-3	③
		Q2014	A-3	-	D2012		A-2
		Q2015	A-4	②	D2013	A-3	③
		Q2016	B-3	②	D2014	A-2	③
		Q2017	A-2	②	D2015		A-3
		Q2018	A-2	②	D2016	B-2	③
					D2017	A-3	③
					D2018	B-4	③
					D2019	B-4	③
					D2020	A-1	③
					D2021	A-1	③
					D2022		A-4
					D2023	B-2	③
					D2024	A-3	③
					D2025	A-2	③
					D2026	B-4	③
					D2027	A-4	③

TRANSISTOR							
(Component Side)	(Conductor Side)						
Q2001	A-2	②					
Q2002	A-2	②					
Q2003	A-1	-					
Q2004	A-2	-					
Q2005	B-3	②					
Q2006		-					
Q2007	A-1	②					
Q2008	A-4	-					
Q2009	A-4	②					

DIODE							
(Component Side)	(Conductor Side)						
D2001	A-2	③					
D2002	B-3	③					
D2003	A-1	③					
D2004	A-2	③					
D2005	A-3	③					
D2006	B-3	③					
D2007	A-4	③					


*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 4-14)

(3) Schematic Diagram of F Board

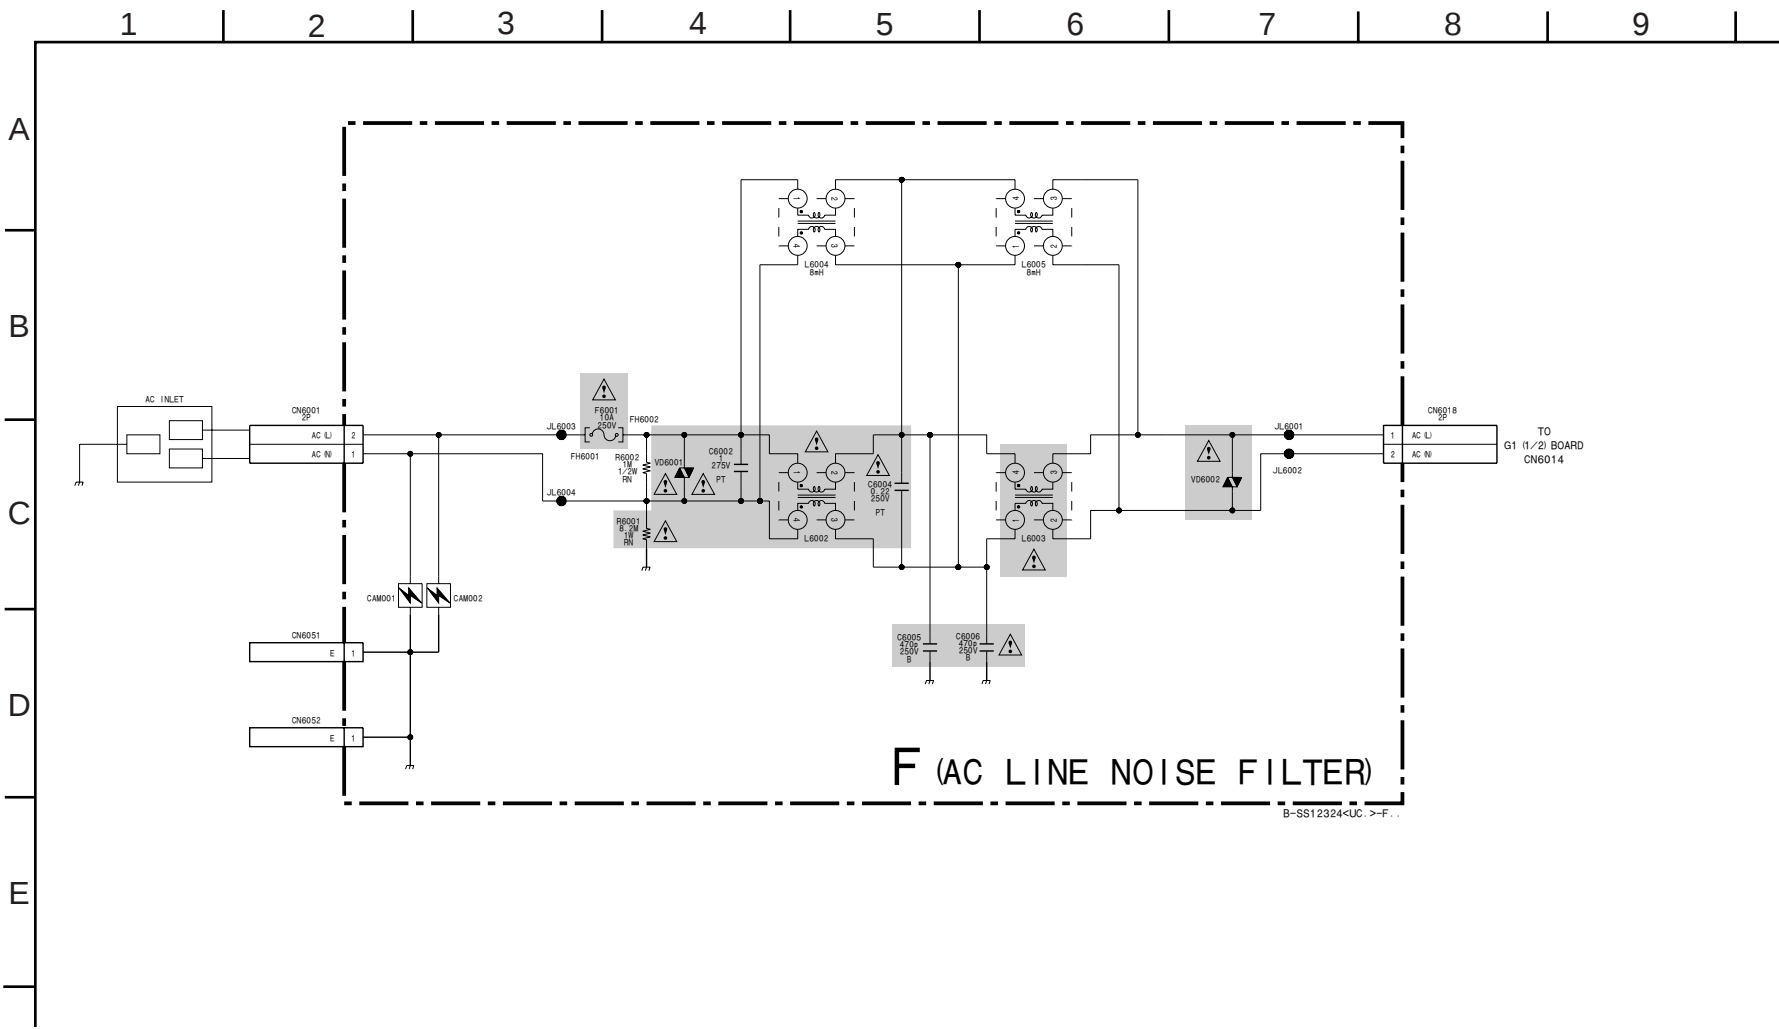


F [AC LINE NOISE FILTER]

— F BOARD —

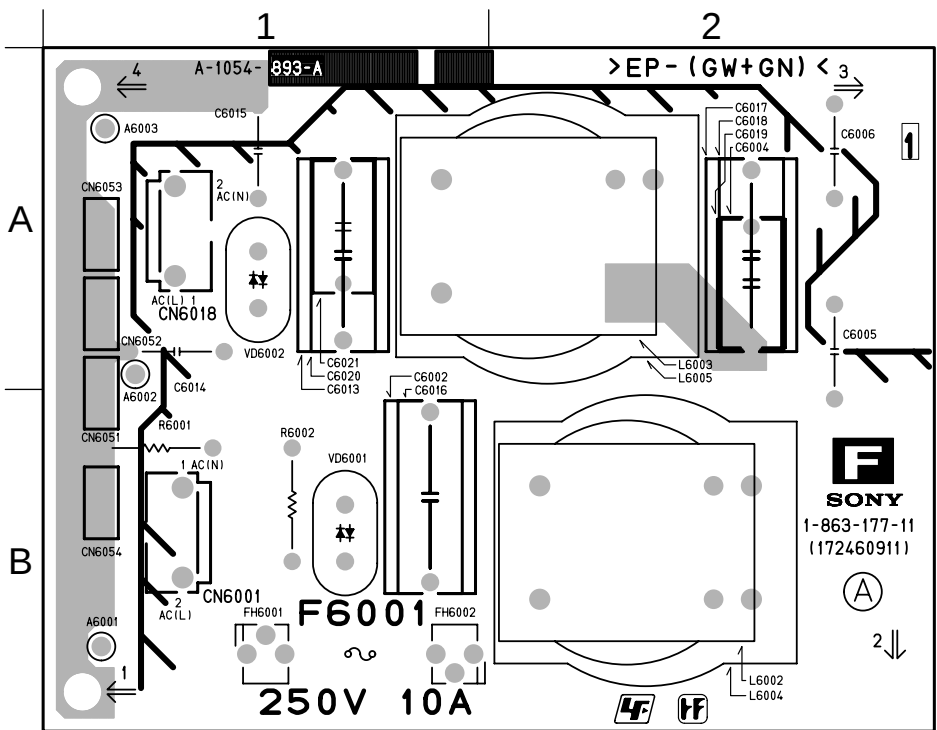



<COMPONENT SIDE>

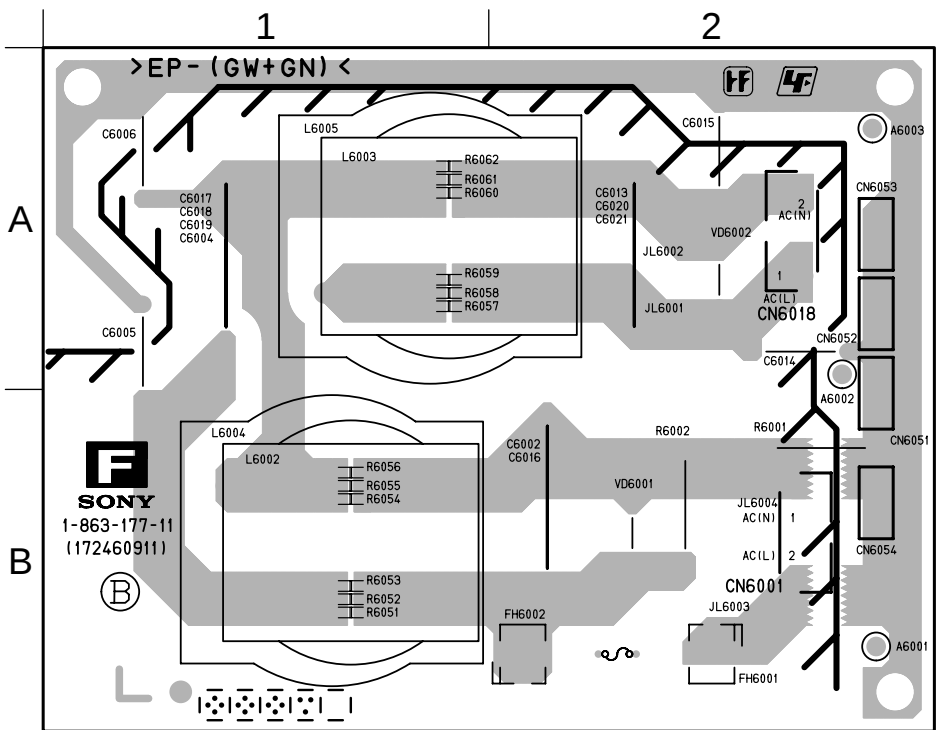


<CONDUCTOR SIDE>

(4) Schematic Diagrams of G1 Board

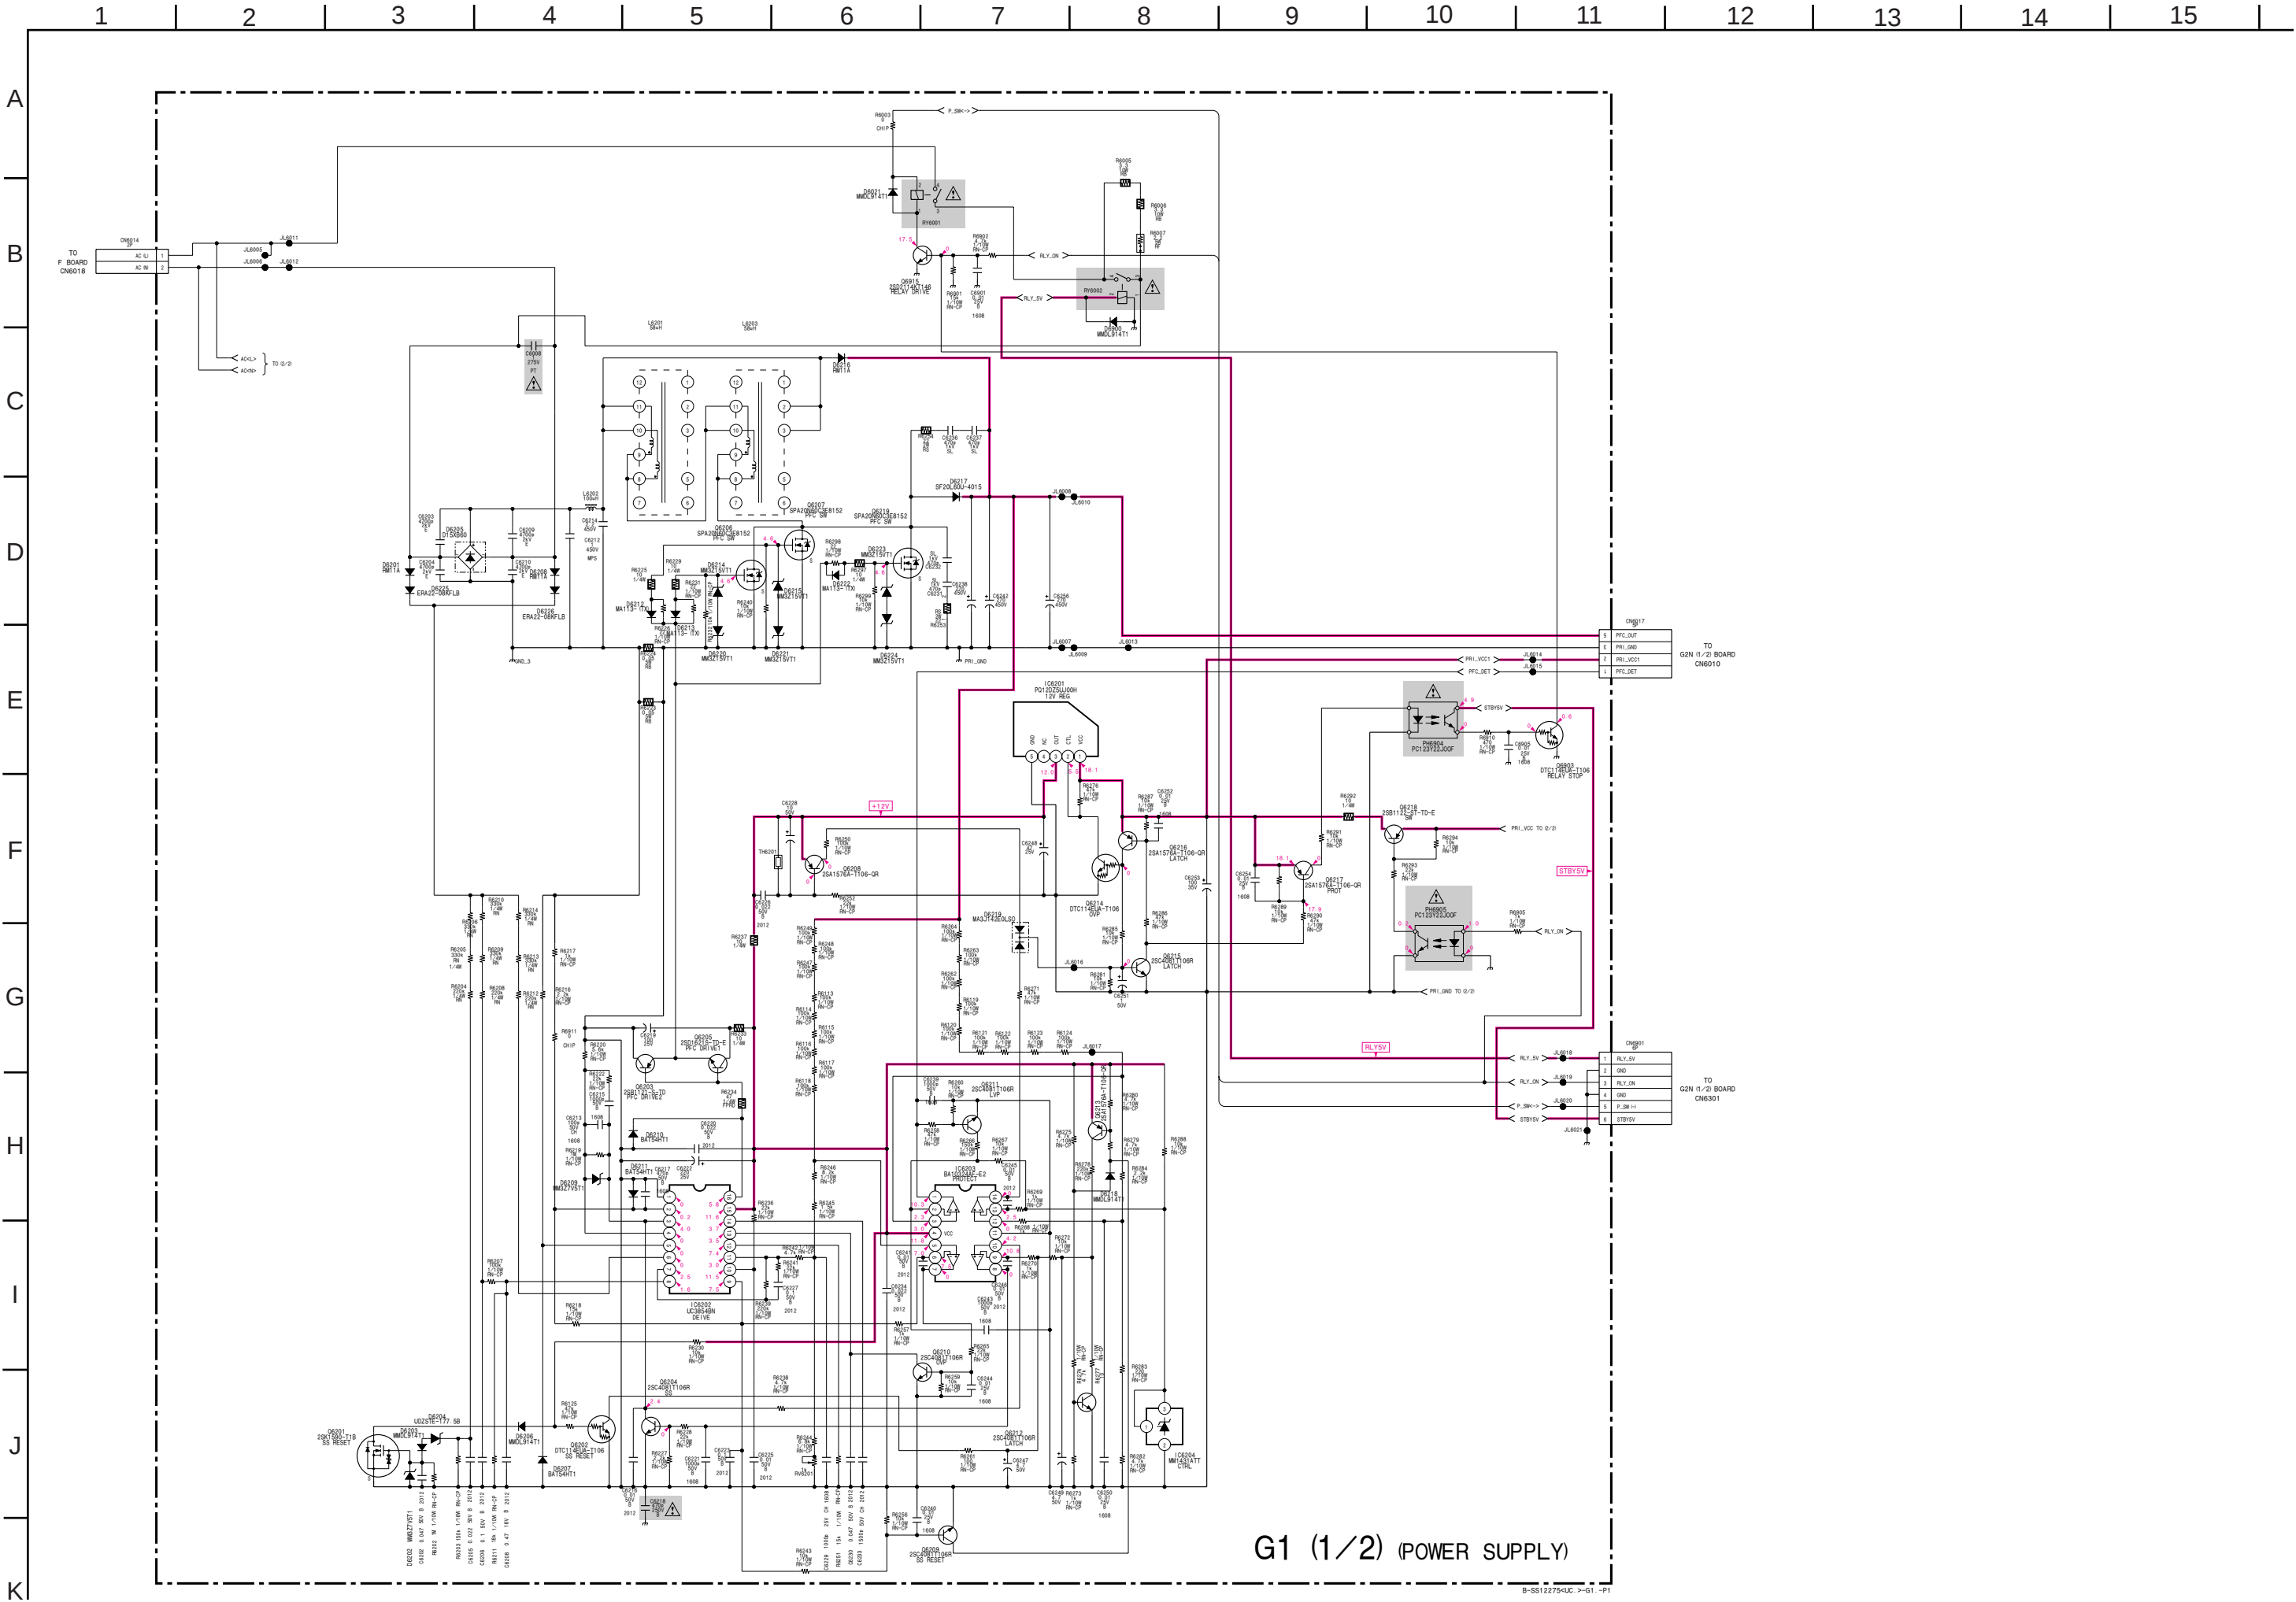




— G1 BOARD —

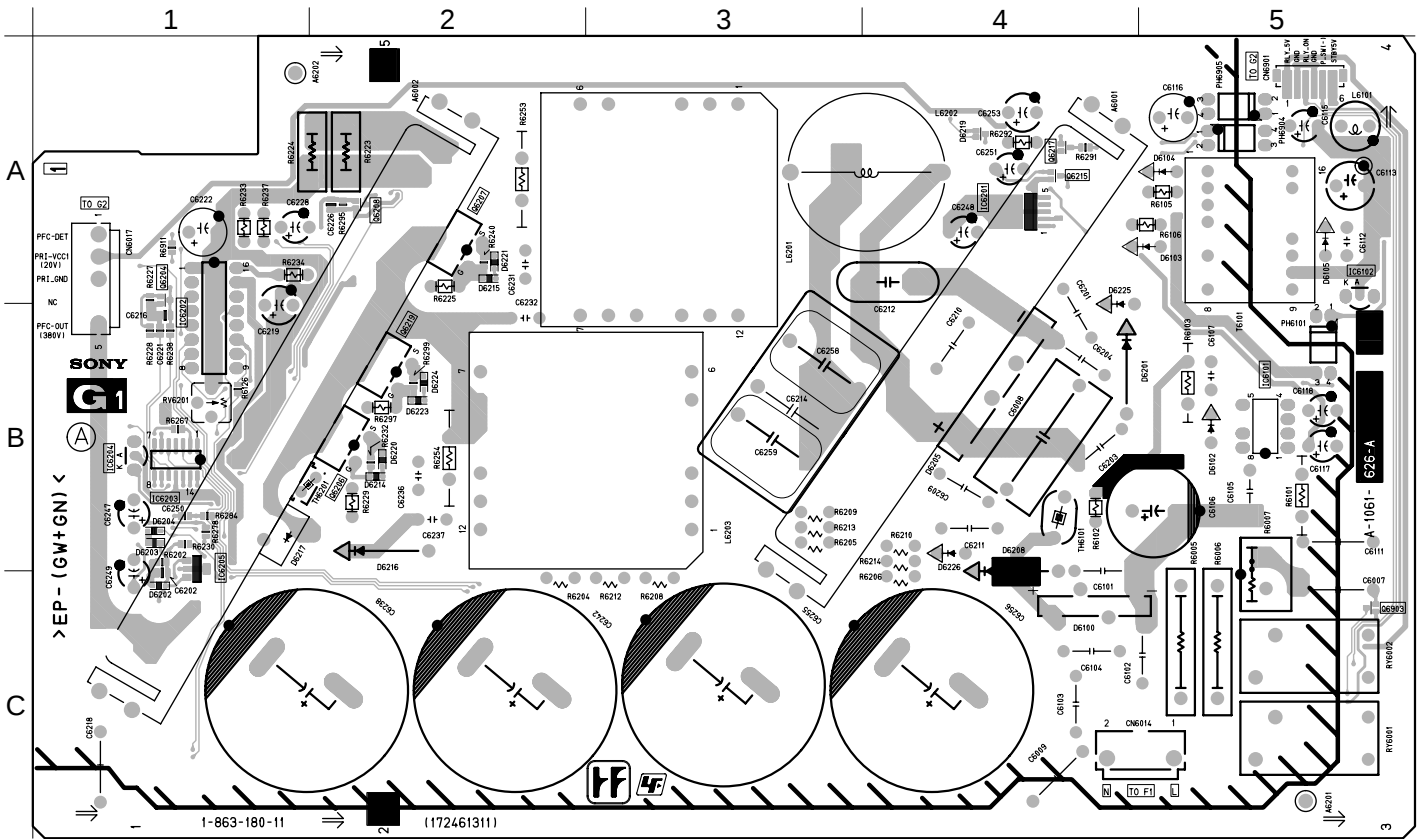

<COMPONENT SIDE>

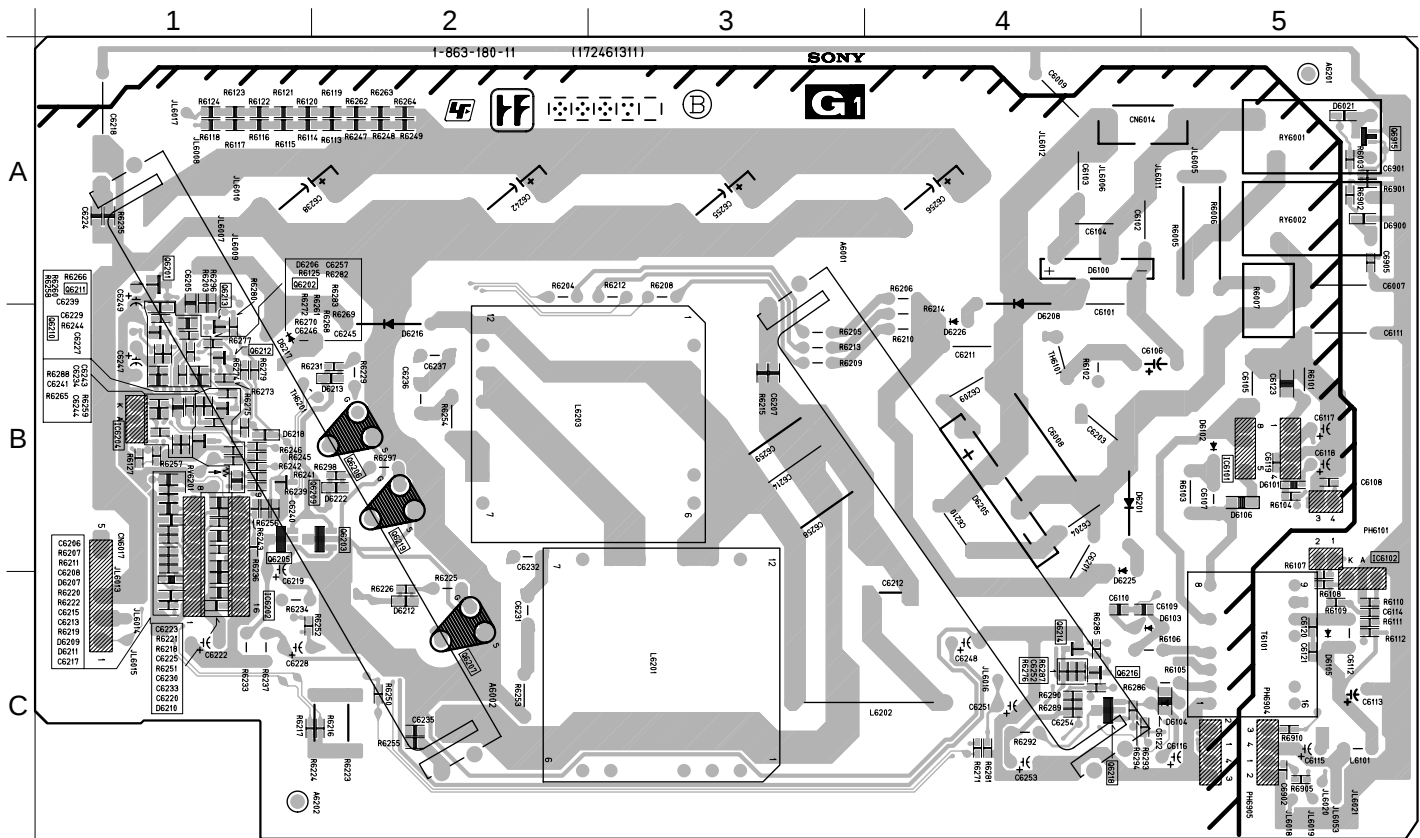


<CONDUCTOR SIDE>

• G1 BOARD SEMICONDUCTOR LOCATION

IC									
(Component Side)	(Conductor Side)								
IC6101	B-5	Q6212	B-1	①	D6204	B-1	③		
IC6102	A-5	Q6213	B-1	①	D6205	B-4	③		
IC6201	A-4	Q6214	C-4	①	D6206			B-1	③
IC6202	A-1	Q6215	A-4	②	D6207			B-1	-
IC6203	B-1	Q6216	C-4	①	D6208	C-4			
IC6204	B-1	Q6217	A-4	②	D6209			C-1	③
IC6205	B-1	Q6218	C-4	②	D6210			C-1	③
		Q6219	B-2	-	D6211			C-1	③
		Q6903	C-5	②	D6212			C-2	③
		Q6915	A-5	①	D6213			B-2	③
TRANSISTOR		DIODE							
(Component Side)	(Conductor Side)	*	(Component Side)	(Conductor Side)	*				
Q6201	A-1	⑭	D6021	A-5	③	D6214	B-2		③
Q6202	B-1	①	D6100	C-4	-	D6215	A-2		③
Q6203	B-2	②	D6101	B-5	③	D6216	B-2		③
Q6204	A-1	②	D6102	B-5	-	D6217	B-2		-
Q6205	B-1	②	D6103	A-5	-	D6218		B-1	③
Q6206	B-2	-	D6104	A-5	-	D6219	A-4		③
Q6207	A-2	-	D6105	A-5	-	D6220	B-2		③
Q6208	A-2	②	D6106	B-5	③	D6221	A-2		③
Q6209	B-1	①	D6201	B-4	-	D6222		B-2	③
Q6210	B-1	①	D6202	C-1	③	D6224	B-2		③
Q6211	B-1	①	D6203	B-1	③	D6225	B-4		-
						D6226	B-4		-
						D6900		A-5	③

*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 4-14)

(5) Schematic Diagrams of G2N Board

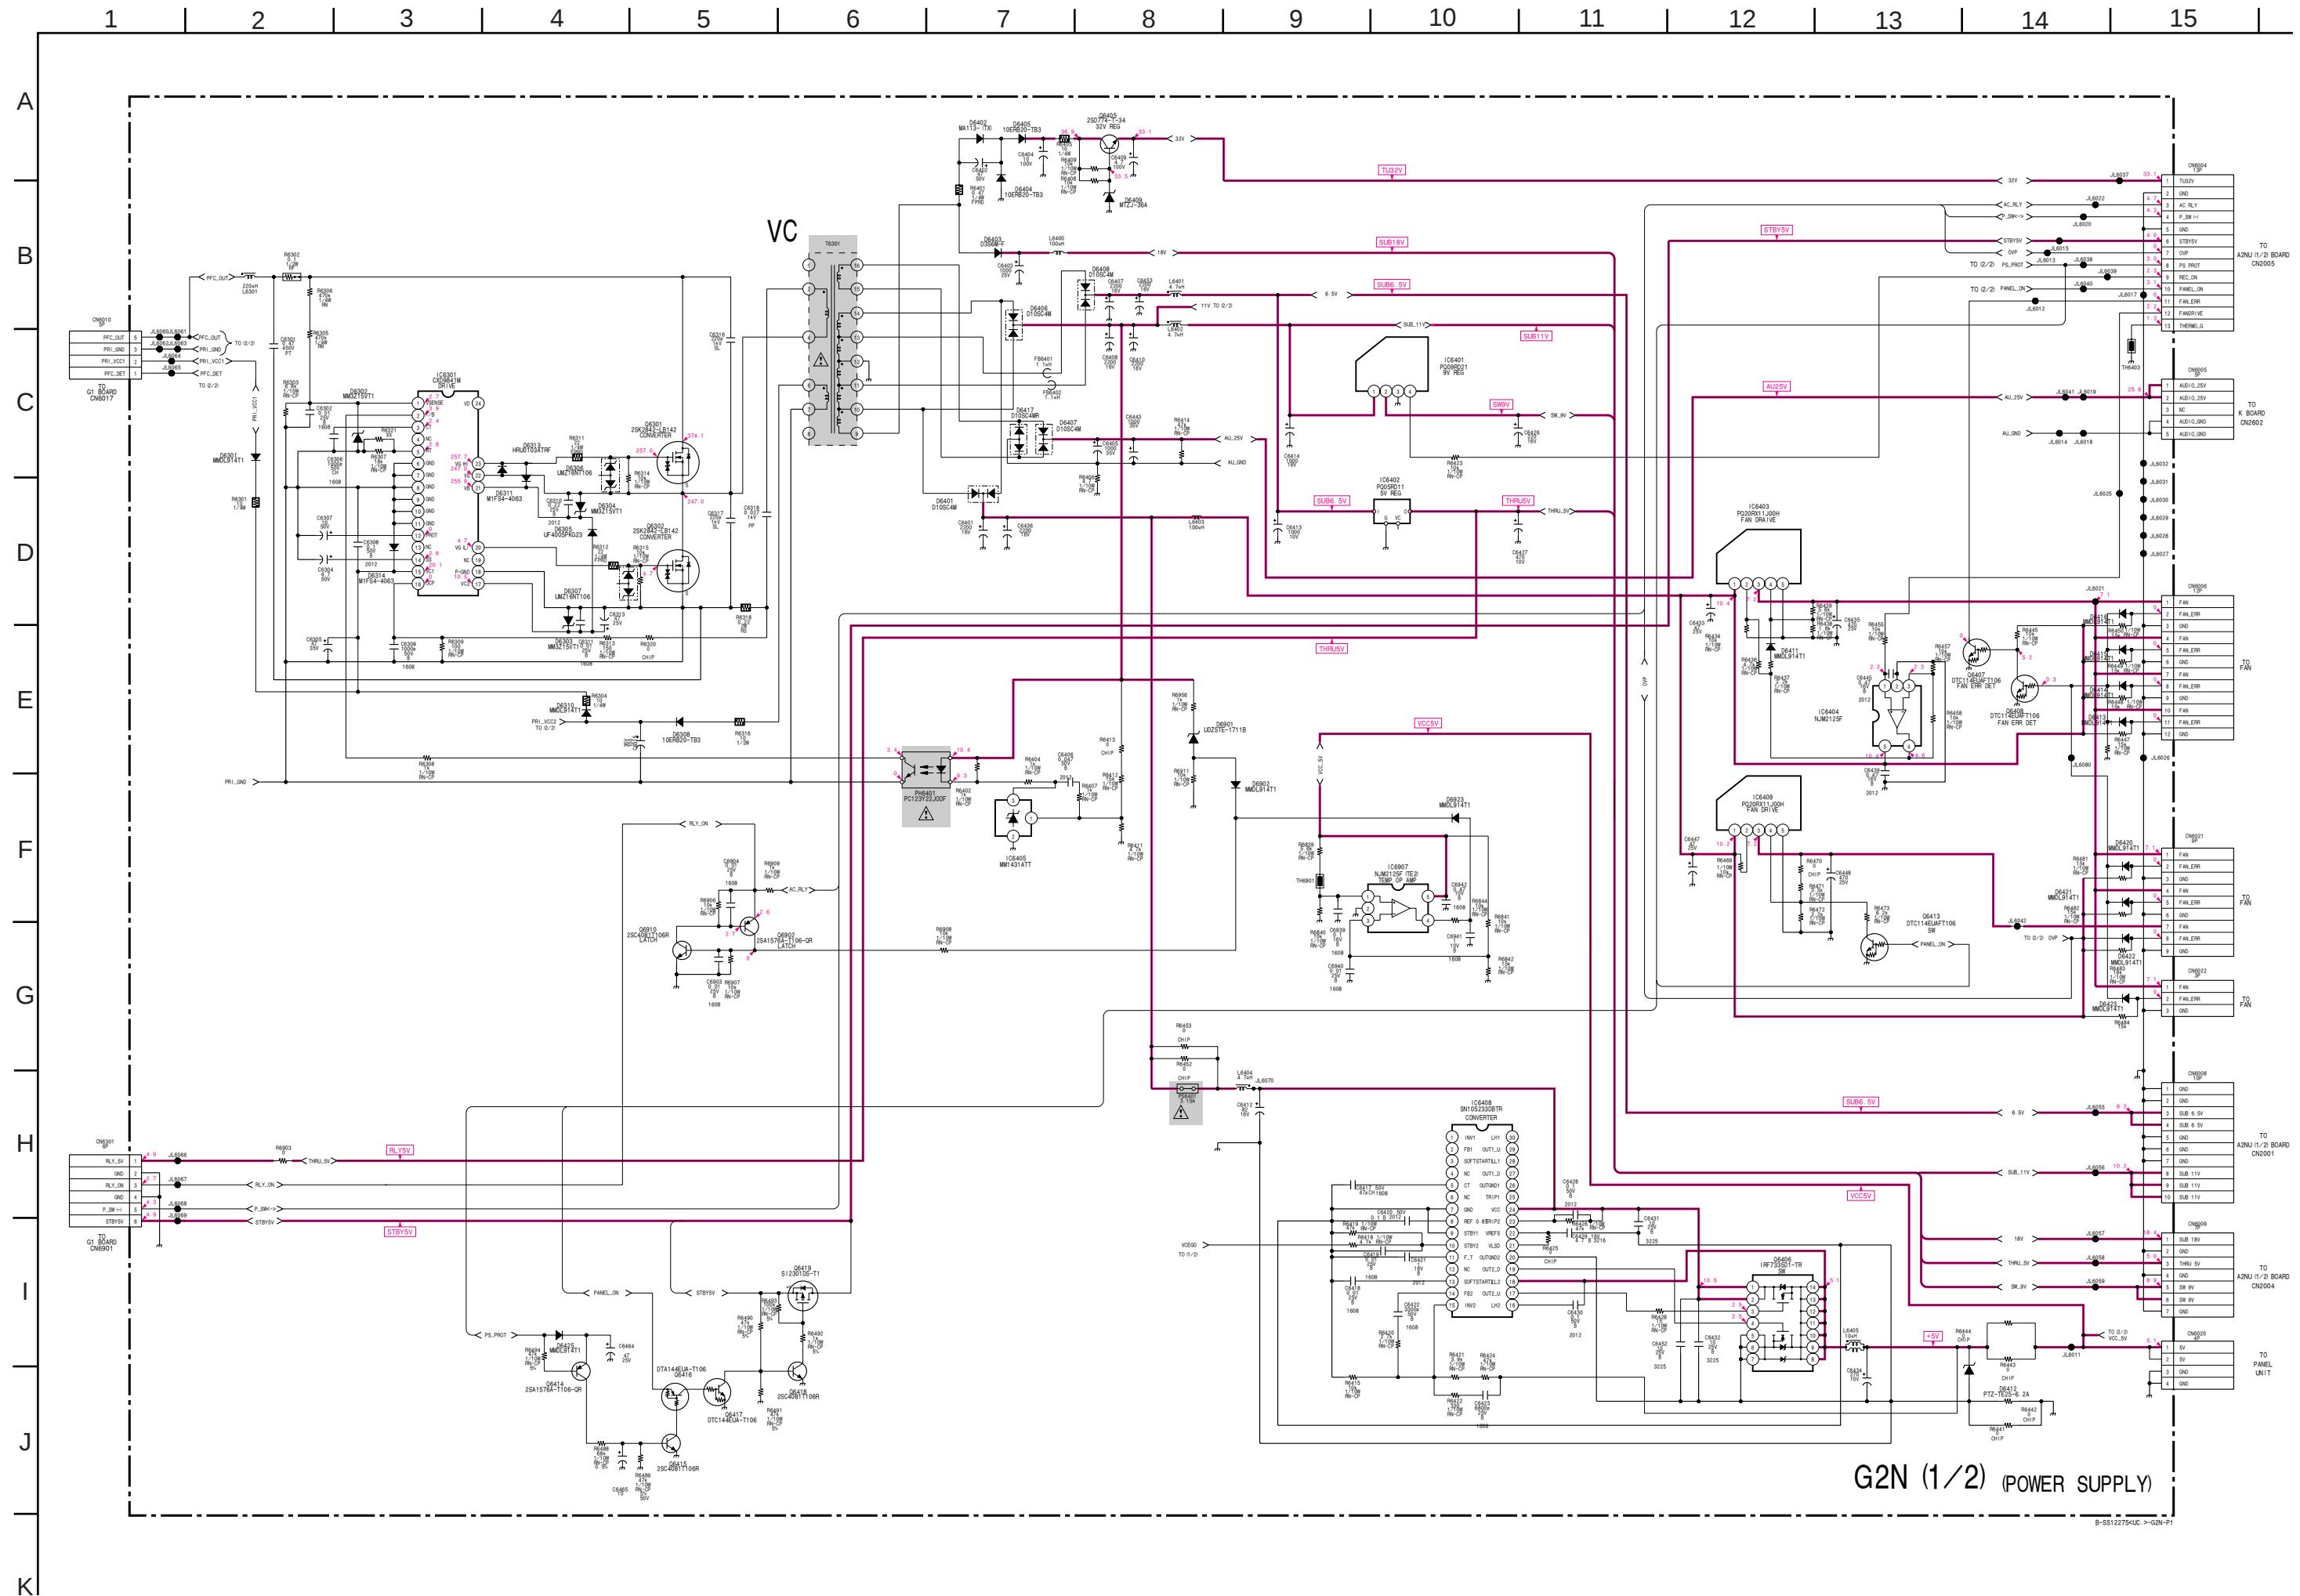





IC		IC6902 C-5		Q6408 D-5		Q6802 B-5		D6305 E-2		D6407 D-4		D6424 D-5		D6700 A-1		D6804 B-3		D6921 C-5	
(Component Side) (Conductor Side)		IC6903 C-4		Q6413 D-5		Q6901 C-4		D6306 E-2		D6408 D-4		D6501 C-4		D6701 A-2		D6805 B-5		D6922 C-4	
		IC6905 C-5		Q6501 C-2		Q6902 C-5		D6307 D-2		D6409 E-5		D6502 C-2		D6702 A-1		D6806 A-2		D6923 B-5	
IC6301	E-2	IC6906 C-5		Q6502 C-2		Q6903 C-5		D6308 E-2		D6410 C-2		D6503 C-4		D6703 A-5		D6812 C-5			
IC6401	E-4	IC6907 B-5		Q6503 D-2		Q6905 C-4		D6310 E-3		D6411 D-1		D6504 C-2		D6704 A-1		D6901 C-5			
IC6402	E-5			Q6504 C-2		Q6906 C-5		D6311 E-2		D6412 C-1		D6505 C-2		D6705 A-1		D6902 C-5			
IC6403	E-5			Q6600 B-5		Q6909 C-4		D6312 E-2		D6413 D-5		D6506 C-2		D6706 B-5		D6903 C-5			
IC6404	D-5			Q6601 B-5		Q6910 C-5		D6313 E-2		D6414 D-5		D6507 D-2		D6707 A-1		D6904 C-5			
IC6405	E-3			Q6701 A-1		Q6911 C-5		D6314 E-2		D6415 D-5		D6511 C-2		D6708 B-1		D6906 C-1			
IC6408	C-5			Q6702 A-2		Q6912 C-4		D6401 E-4		D6416 D-5		D6512 C-2		D6711 A-1		D6907 C-5			
IC6409	D-5			Q6703 B-1		Q6913 C-3		D6402 E-3		D6417 C-4		D6513 C-2		D6712 A-1		D6908 C-5			
IC6501	C-2			Q6704 B-1		Q6915 C-5		D6403 E-4		D6420 D-5		D6514 C-2		D6713 A-2		D6912 C-4			
IC6601	C-3			Q6705 B-1		Q6916 C-4		D6404 E-3		D6421 D-5		D6601 C-4		D6714 A-1		D6913 C-4			
IC6701	A-1			Q6706 A-1		Q6917 C-4		D6405 E-4		D6422 D-5		D6602 B-5		D6801 A-3		D6914 C-4			
IC6801	A-2			Q6801 B-5		Q6918 C-4		D6406 E-4		D6423 D-5		D6603 B-5		D6802 B-1		D6920 C-4			

KDE-W50A10 (K) 4-28

	1	2	3	4	5	6	7
--	---	---	---	---	---	---	---

A

TO
M1U (S/S) BOARD
CN7003
(① - ⑦)

CN1051	1
E	2
STBY/SV	3
KEY-WAKE	4
KEY1	5
E	6
P-QN	7
P-SW (-)	

H1U (KEY)

B-SS12324<UC.>-H1U

B

C



D

E




*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 4-14)

(7) Schematic Diagram of H3 and H4 Boards

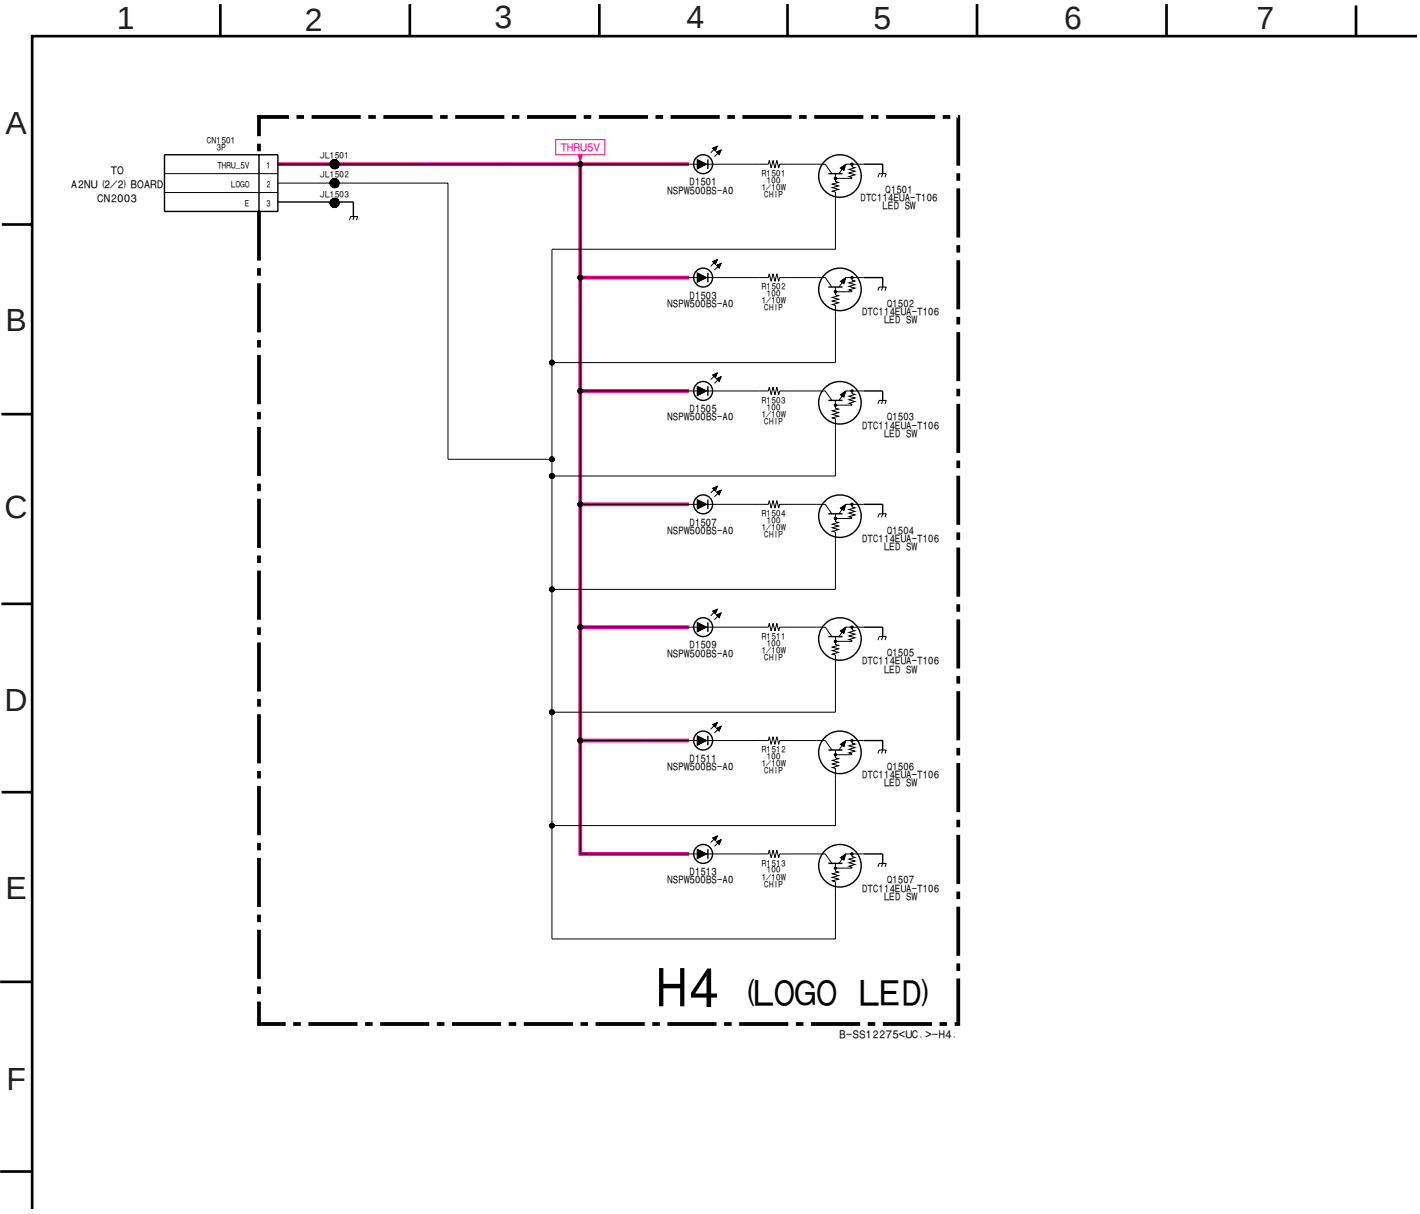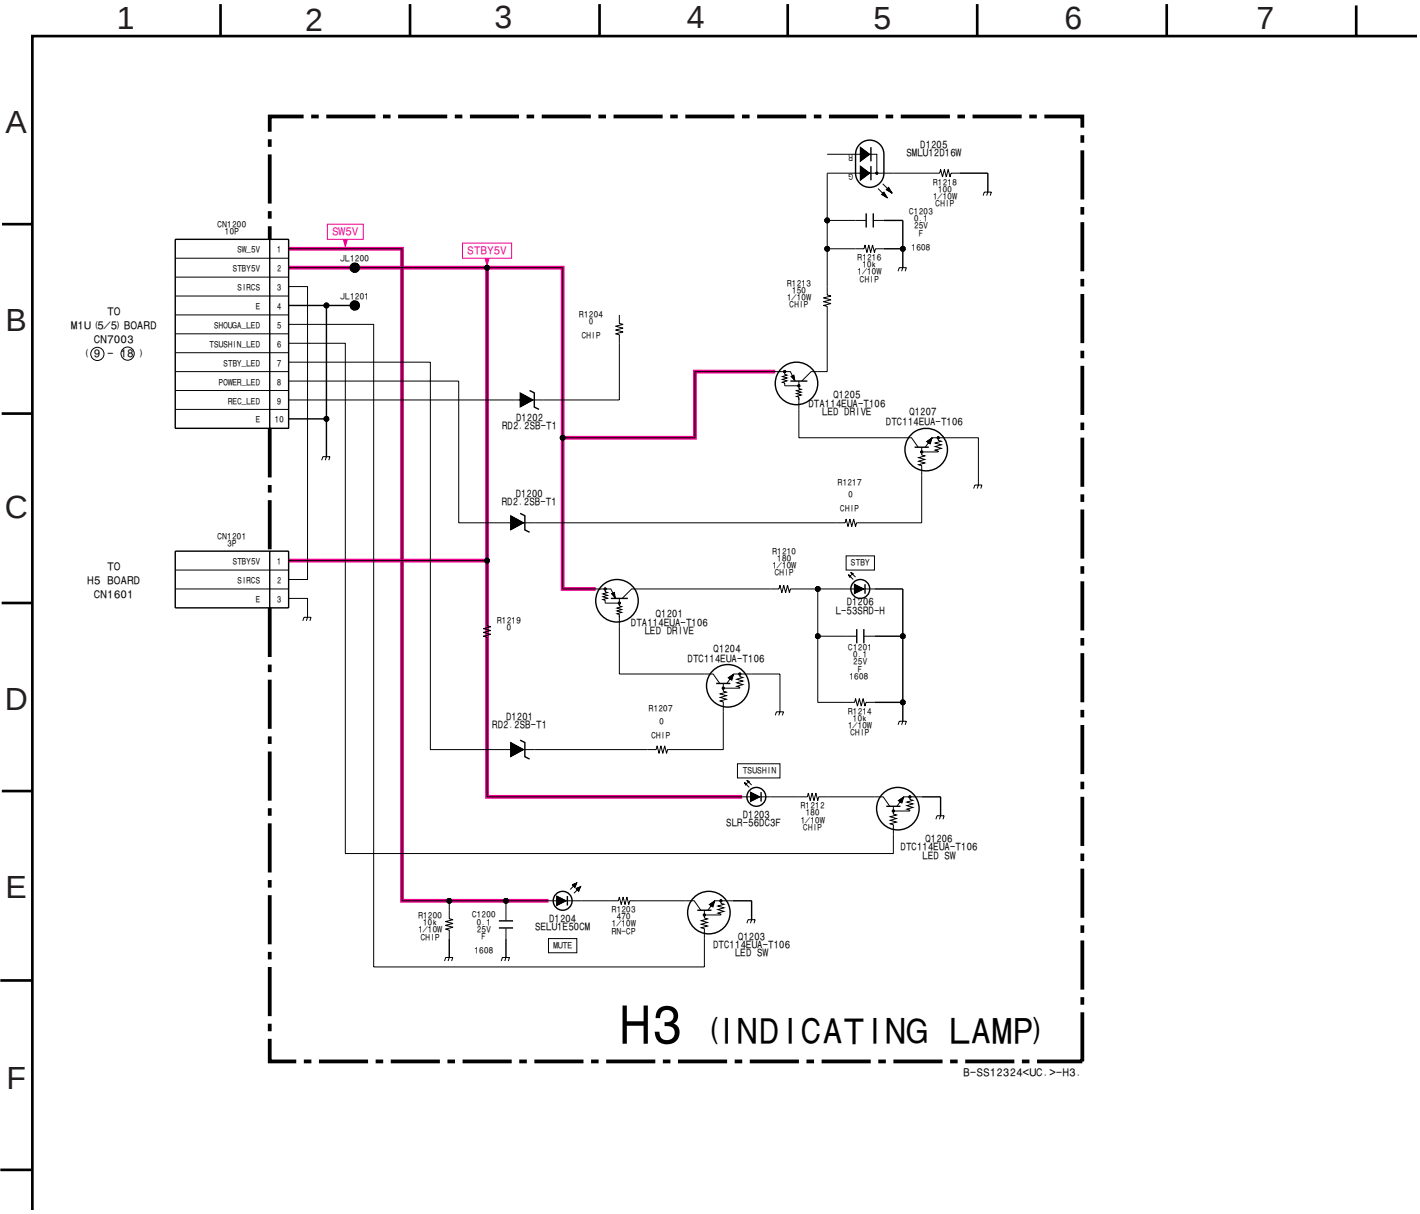


H3 [INDICATING LAMP]

— H3 BOARD —



<COMPONENT SIDE>



<CONDUCTOR SIDE>


• H3 BOARD SEMICONDUCTOR LOCATION

Ref.	*
Q1200, Q1201, Q1203, Q1205, Q1206	②
D1200-D1202	③
D1203-D1206	-


*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 4-14)

H4 [LOGO LED]

— H4 BOARD —



<COMPONENT SIDE>

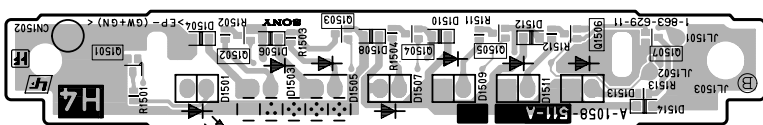


<CONDUCTOR SIDE>

• H4 BOARD SEMICONDUCTOR LOCATION

Ref.	*
Q1501-Q1507	②
D1501, D1503, D1505, D1507, D1509, D1511, D1513	-


*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 4-14)

(8) Schematic Diagram of H5 Board

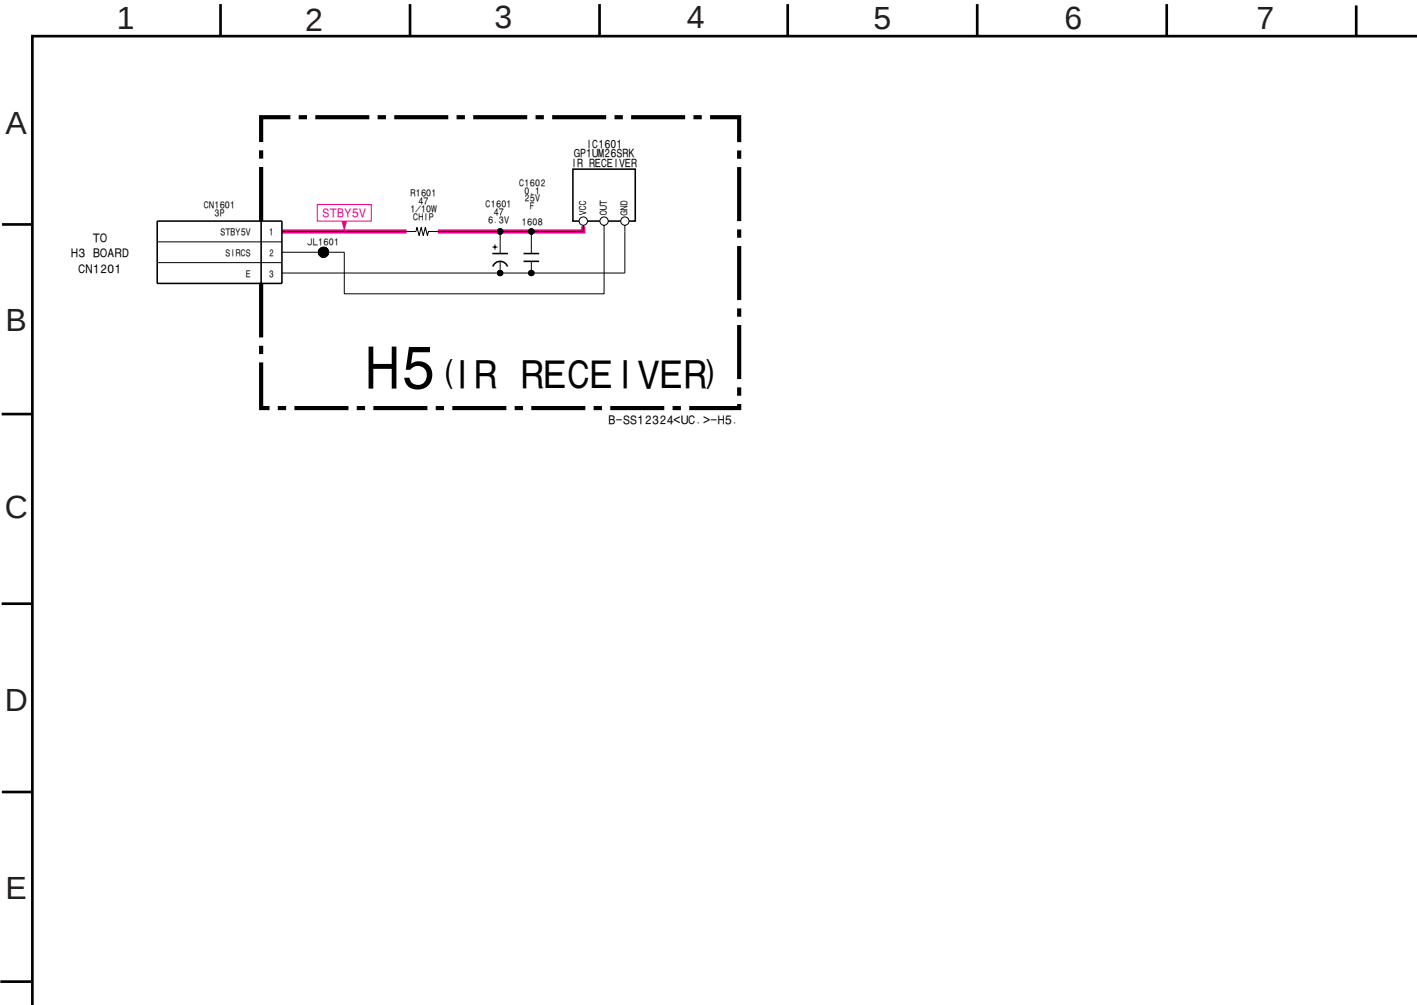


H5 [IR RECEIVER]

— H5 BOARD —

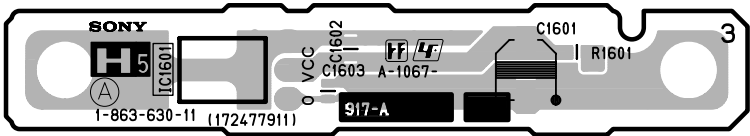


<COMPONENT SIDE>

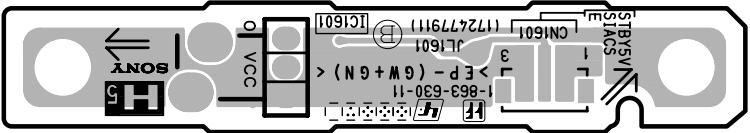


<CONDUCTOR SIDE>

(9) Schematic Diagram of QH Board

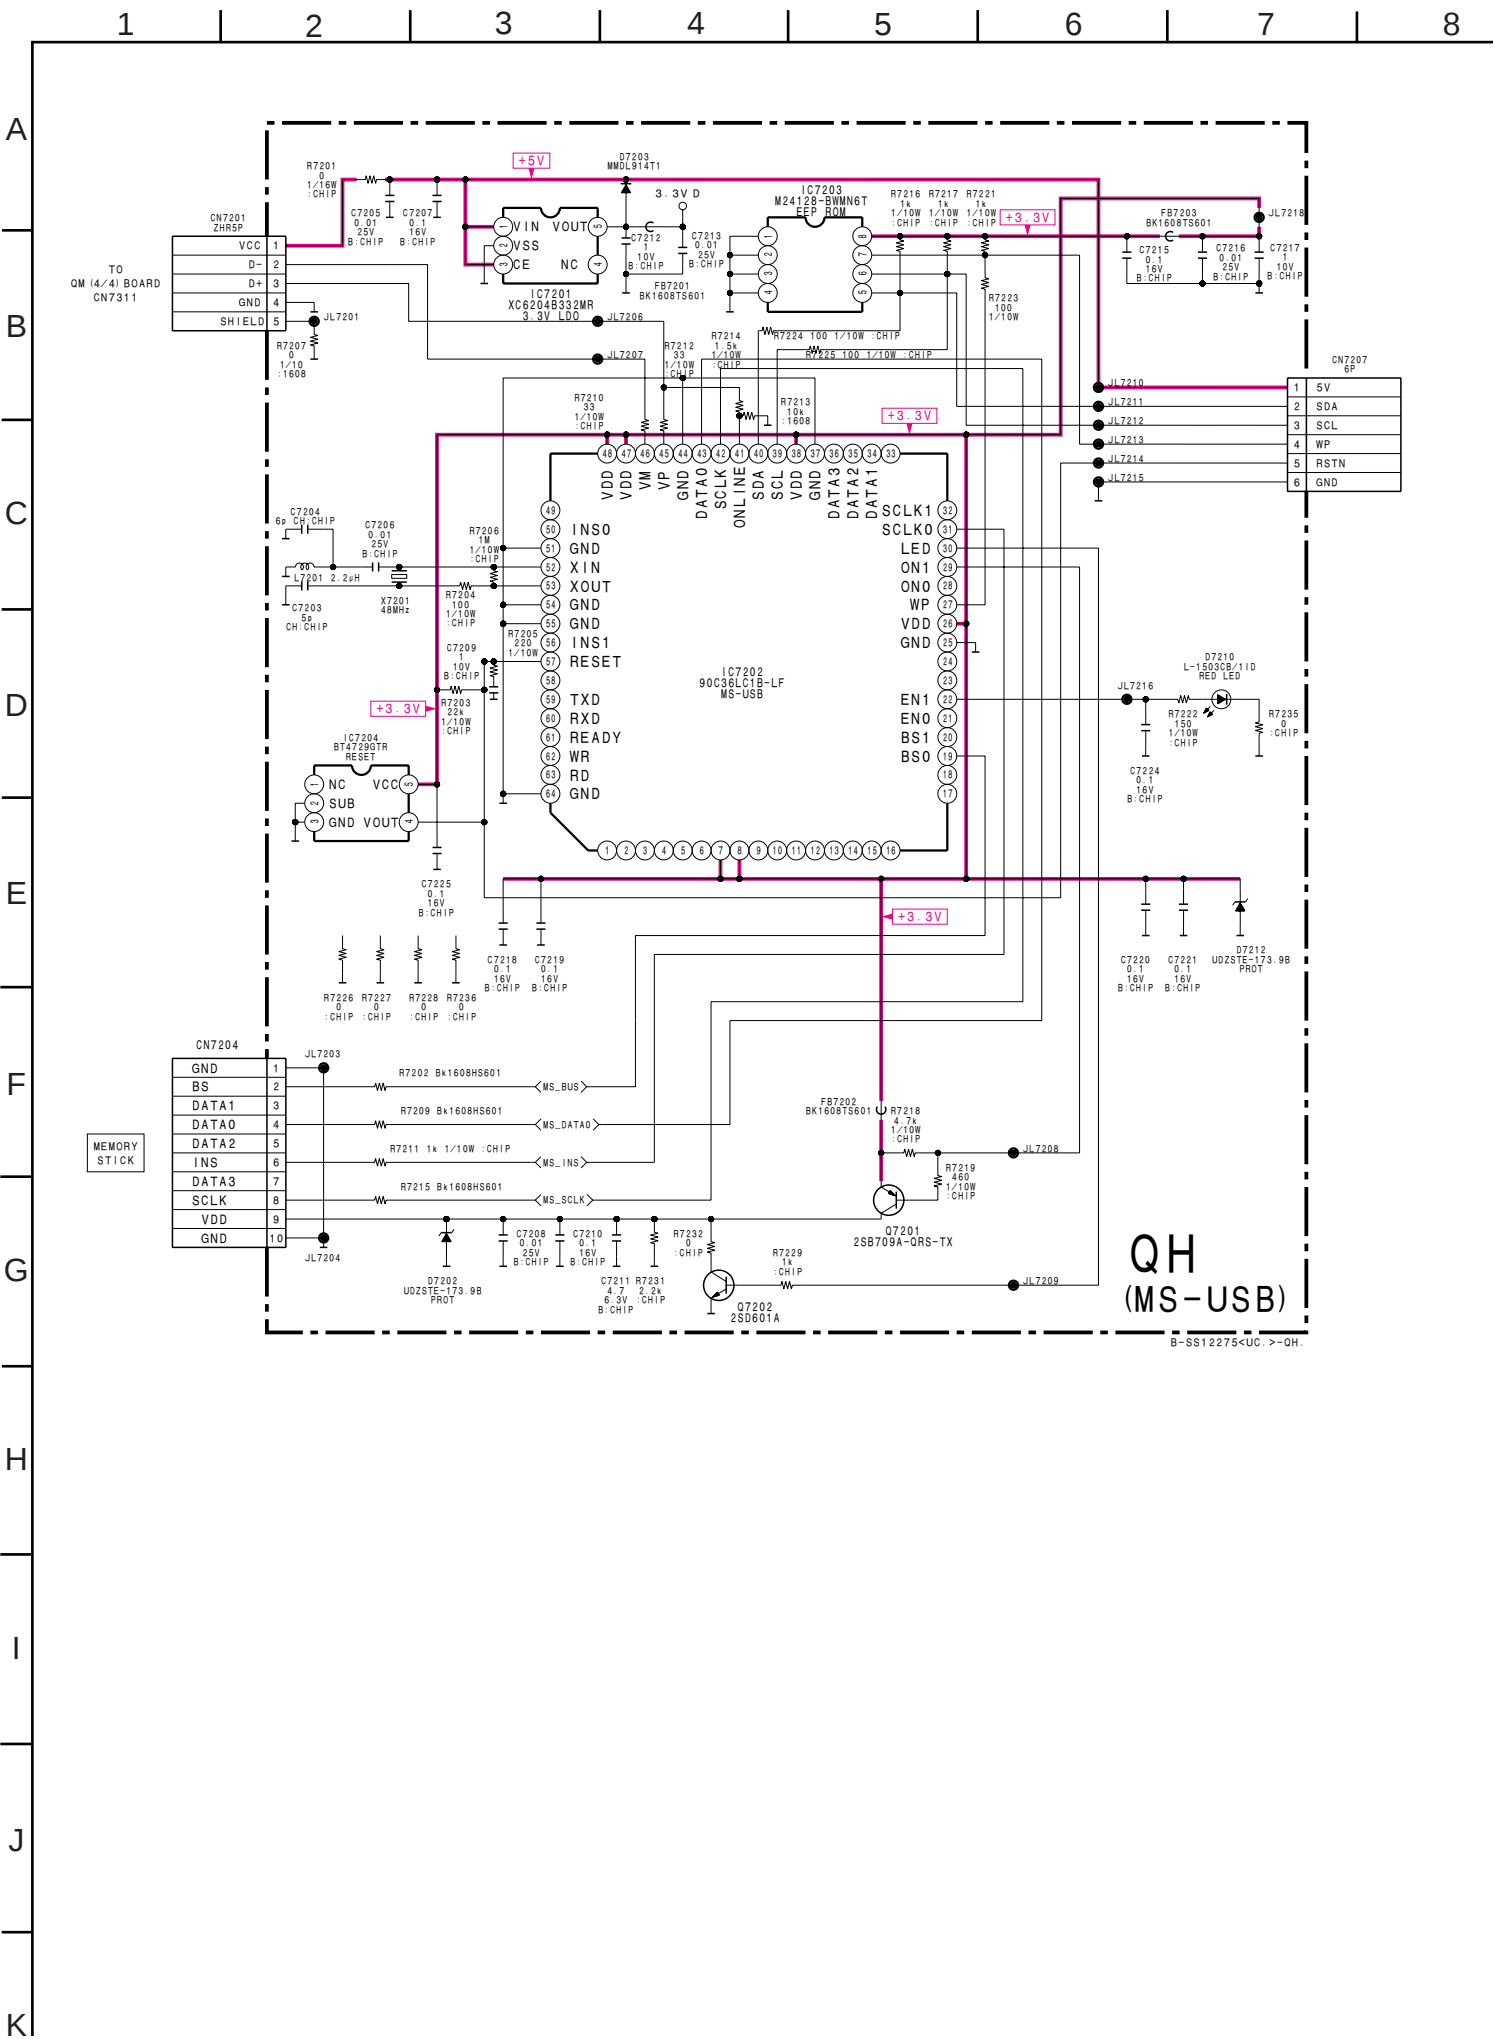


QH [MS-USB]

— QH BOARD —

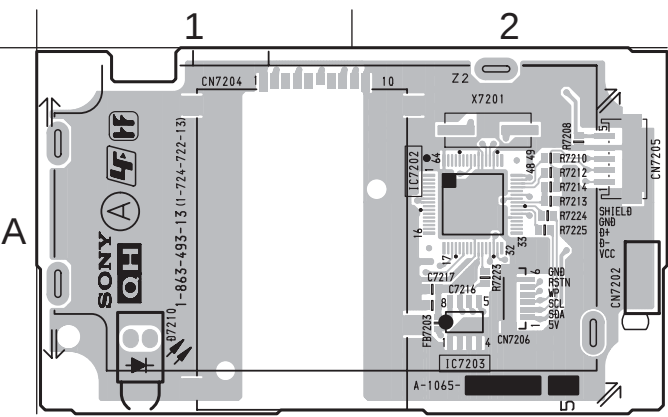

<COMPONENT SIDE>

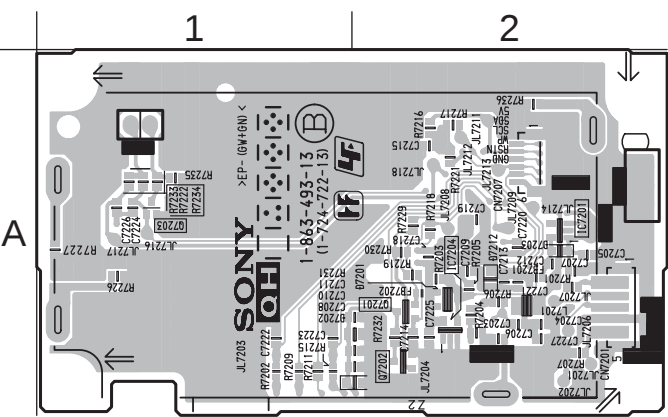

<CONDUCTOR SIDE>

• QH BOARD SEMICONDUCTOR LOCATION


IC	
(Component Side)	(Conductor Side)
IC7201	B-1
IC7202	B-1
IC7203	B-1
IC7204	B-1
TRANSISTOR	
(Component Side)	(Conductor Side) *
Q7201	B-1 2
Q7202	B-1 2
DIODE	
(Component Side)	(Conductor Side) *
D7202	B-1 3
D7203	B-1 3
D7210	-
D7212	B-1 3

*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 4-14)

4-5. SEMICONDUCTORS


IC

AK5357VT-E2
CD4052BNSR
CY22392ZXC-363
CY22392ZXC-364
FMS6418AM16X
M52055FP
MAX1809EEE+TG068
MAX4018EEE-TG068
NJM2123V(TE2)
SN74CBTLV3253PWR
TPS54350PWPR
UC3854BN




16Pin SOP

BA033FP-E2
BD4729GTR
NJM2125F(TE2)
NJM2870F18(TE2)
PST3629NR
R3112N421A-TR-FA
RN5VD21AA-TL-FA
RN5VD42AA-TL-FA
RN5VD53AA-TL
SN74CBTLV1G125DCKR
SN74LVC1G08DCKR
SN74LVC1G125DCKR
SN74LVC1G32DCKR
TAR5S33(TE85R)
TC7SA08FU(TE85R)
TC7SZ08FU(TE85R)
TC7SZU04FU(TE85R)
XC6204B332MR
XC6209B182MR




5Pin CHIP

BA10324AF-E2
CD74HC4053M-96
K4H561638F-UCCCT00
SN74LV08APWR
SN74LV4066APWR
TPS2051ADR
XRA10324AF




14Pin SOP

BA10339F-E2
BR24C02F-WE2
BR24L02F-WE2
BR24L32F-WE2
CS4335-KSZR
CY25104ZXC-1
CY25104ZXC-2
DS90LV018ATMX
IRU3037CS
M24128-BWMN6T(A)
M24C32-WMN6T(B)
M24C64-WMN6T(B)
M25P10-AVMN6T
MM1096AFF
NJM4558E(TE2)
NJM4558V-TE2
SN74AHC2G14HDCU3
SN74AHC2G66HDCU3
SN74LVC2G66DCUR
TC4W53FU
TC4W53FU(TE12R)




8Pin SOP

BD9851EFV-E2




20Pin SOP

CXA2188Q-T4




40Pin QFP

CXA2209Q-T6




80Pin QFP

CXD9774M




36Pin SOP

CXD9788AR
HD64F3694FXV-DA4
LC89056W-E




48Pin QFP

CXD9816GG




388Pin PGA

CXD9826R
THC63LVD103
THC63LVD104A
90C36LC1B-LF




64Pin QFP

CXD9827GP




256Pin PGA

CXD9835TNDBTR




38Pin SOP

DS90C387VJDX
SII9993CTG100




100Pin QFP

HYB25D256160CE-5
MT46V16M16P-5BTR




66Pin SOP

IC62C1024AL-70QG
IS62C1024L-70QLT
K6X1008C2D-BF70T




32Pin SOP

IS42S32200B-6TL
IS42S32200B-6TL-TR
MT48LC2M32B2P-6-Y14W




86Pin SOP

K9F2808U0C-PCB0T
K9F2808U0C-PIB0T
MBM29DL32TF70TN-KE1-WE1
TC58DVM72A1TG00
TC74VCX162374(EL,F




48Pin SOP

MB90F334APMC-GE1




120Pin QFP


MM1431ATT



MSP4440K-QA-B2




MT48LC4M16A2P-75-Y14W-G




54Pin SOP

NJM2387DL2-TE1
PQ070XZ01ZPH




NJU7223DL1-25
UPC2905T-E1




PQ05RD11
PQ09DZ1U
PQ09RD21




PQ12DZ5UJ00H




PQ1CZ41H2ZPH



PQ20RX11J00H




PST3627UL
PST575IMT-T1




4Pin CHIP

S-80828CNNB-B8NT2G




SN105233DBTR
TPS2205IDBR




30Pin SOP

SN74LVC2GU04DCKR
TK11819MTL
SN74LVC2G34DCKR




6Pin CHIP

STR-A6169




8Pin DIP


TL431CPK-E2



XC6209F122PR




215H31AGA12G




571Pin PGA

TRANSISTOR


DTA113ZUA-T106
DTA114EUAFT106
DTA114EUA-T106
DTA114TUA-T106
DTA143EK
DTA143EKA-T146
DTA144EUA-T106
DTC114EUA-T106
DTC143EUA-T106
DTC143TUA-T106
DTC144EKA
DTC144EKA-T146
DTC144EUA-T106
DTC144WKA-T146
MSB1218A-RT1
MSB709-RT1
MSD1819A-RT1
MSD601-RT1
MUN2211T1
MUN2212T1
MUN2213T1
UN2211
UN2213
UN2213-TX
2PA1576R-115
2PC4081R-115
2SA1037AK-T146-QR
2SA1037AK-T146-R
2SA1162-G
2SA1226-E4
2SA1226-T1E3E4
2SA1576A-T106-QR
2SB1690KT146
2SB624-BV5
2SB624-T1BV5
2SB709A-QRS-TX
2SB709A-R-TX
2SC1623-L5L6
2SC2412K-T-146-QR
2SC2712-YG
2SC2712-YG-TE85L
2SC3624A-T1L15L16
2SC3775
2SC4081-R
2SC4081T106R
2SC4178-F13F14-T1
2SC4178-F14
2SD2114K
2SD2114KT146
2SD2216J-QR(TX).SO
2SD596-DV5
2SD596-T1DV5
2SD601A-Q
2SD601A-QRS-TX
2SD601A-R-TX
2SD601A-S




DTC114EKA-T146
DTC114EU
DTC114EUAFT106
DTC114TUA-T106




FDS4435A




FDS6986S
IRF7313-TR




IRFR5305TR




IRFS644BYDTU




IRLI3215-LF33




RT1N141C-TP-1




SI2301BDS-T1
SI2301DS-T1
2SK1590-T1B




SPA20N60C3E8152



SSM6N15FU(TE85R)




2SB1121-ST
2SB1121-S-TD
2SB1122-S
2SB1122-ST-TD-E
2SD1621-S
2SD1621S-TD-E
2SK2036(TE85L)



2SD774-34
2SD774-T-34




2SK2842(LBS2SONY)




DIODE


BAS316-115
HZU10BTRF
MM3Z10VT1
MM3Z13VT1
MM3Z15VT1
MM3Z3V9T1
MM3Z4V3ST1
MM3Z6V2ST1
MM3Z7V5T1
MTZJ-T-77-36A
RD2.2SB-T1
02DZ3.9-Z(TPH3)




BAT54HT1
DTZ10B
HRU0103ATRF
MA111-TX
MA113-(TX)
MMDL914T1
UDZSTE-1710B
UDZSTE-1711B
UDZSTE-173.9B
UDZSTE-175.1B
UDZSTE-175.6B
UDZSTE-177.5B
UDZSTE-178.2B
UDZ-TE-17-3.9B
UDZ-TE-17-6.2B
UDZ-TE-17-7.5B
UDZ-TE-17-8.2B
1SS355TE-17




DAN202K
DAN202K-T-146
M1MA152WK-T1



DAN202U
DAN202UT106
1PS184-115



DA221
DA221-TL
1PS181-115




D10SC4M
D8LC40
D8LC40F




D10SC4MR




D15XB60
D2SB60A-F04




D3S6M-F
RM11A




D5LC20U




D5LC20U-4012
D8LC20U-4012




D8LD40-F1



EC21QS03L-TE12L
P6SMBJ30A-5
PTZ-TE25-13A
PTZ-TE25-3.9B
PTZ-TE25-6.2A
RB083L-20TE25




EC31QS03L-TE12L
M1FL20U-4063
RB520S-40TE61
RB521S-30FTE61
RB521S-30-TE61
1SS388(TPL3)




ERA22-08KFLB
UF4005PKG23
10ERB20-TB3




HN1D03FU-TE85L
HN1D03FU-TE85R




MA3J142D0LSO
MA3J142E0LSO




MBRS140T3




M1FS4-4063
MA8027-H-TX
MA8027-L




M1MA152WA-T1
UMZ16NT106




RM11C




SF20L60U-4015




L-1503CB/1ID-F01




L-53SRD-H-F01




NSPW500BS-A0




SEC1901C
SML-210MT-T86
SML-210VTT86



SELU1E50CM



SMLU12D16W



SECTION 5

EXPLODED VIEWS


NOTE:

The components identified ⚠ marked are critical for safety.
Replace only with the part number specified.

Les composants identifiés par la marque ⚠ sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remark column.
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.


5-1. REAR COVER ASSY AND STAND

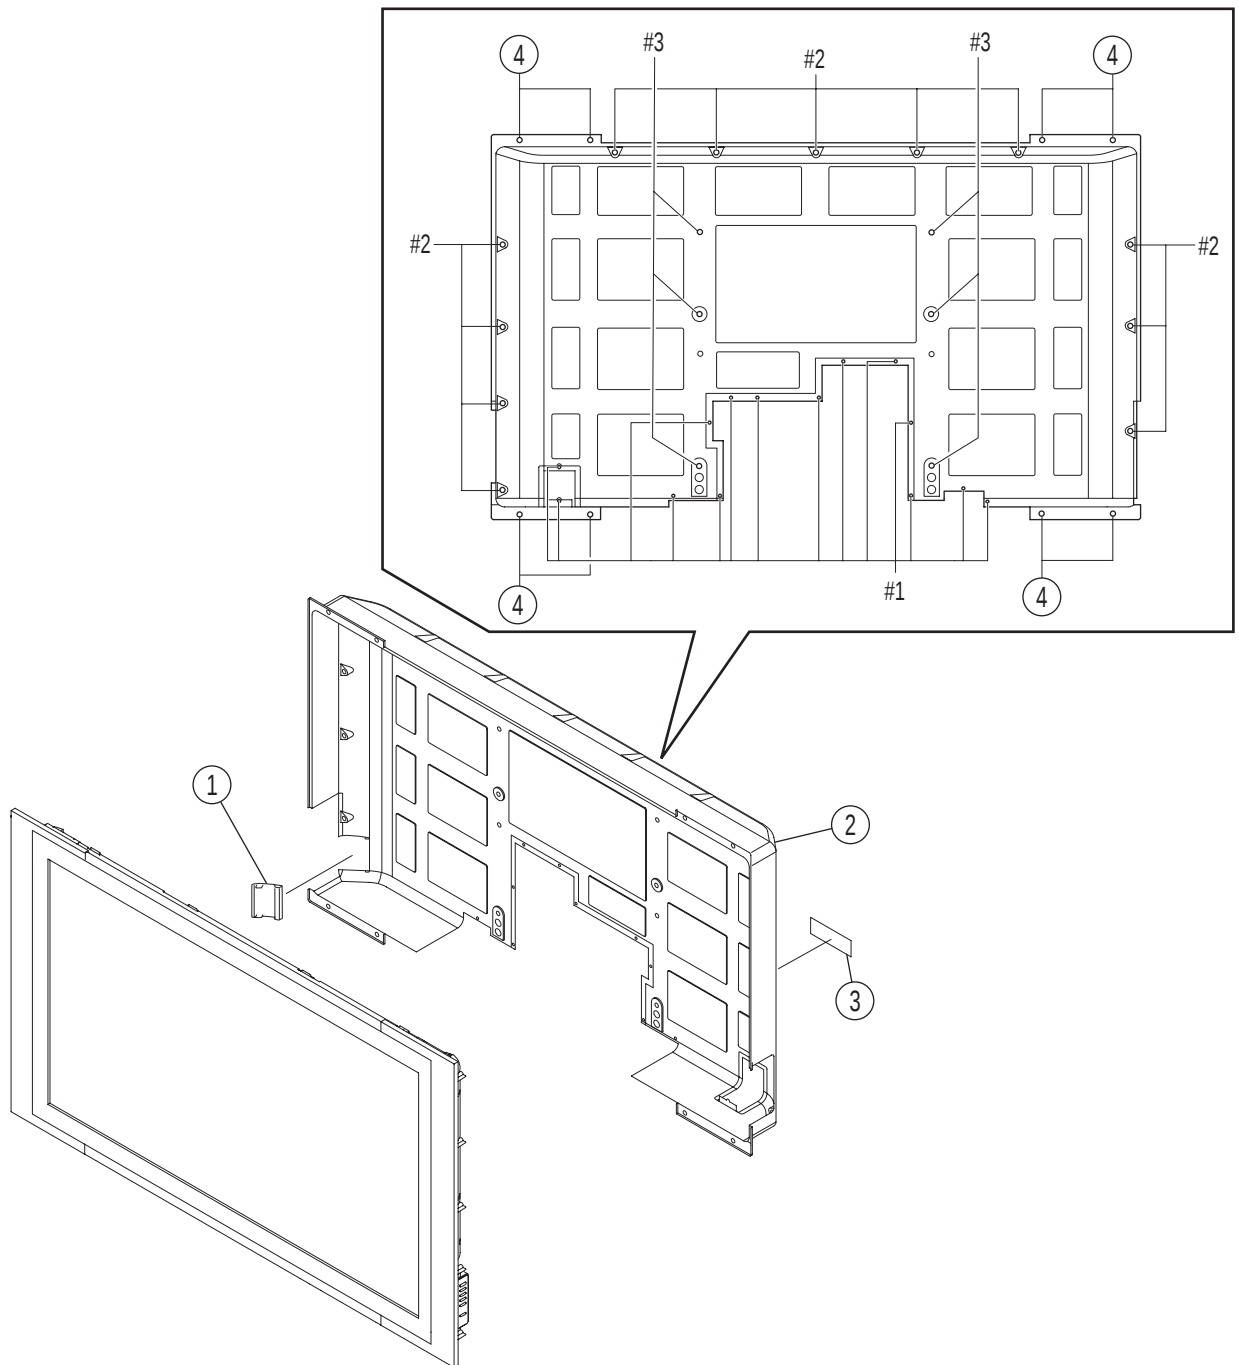

REF. No.	PART No.	DESCRIPTIONRE	MARK
1	2-188-937-01	BLIND LID	
2	X-2024-835-2	REAR COVER (50) ASSY	
3	2-598-679-01	LABEL, MODEL NAME	
4	2-190-715-01	SCREW +PSW 4X6	

REF. No.	PART No.	DESCRIPTIONRE	MARK
#1	7-682-947-09	SCREW +PSW 3X6	
#2	7-685-663-79	SCREW +BVTP 4X16, TYPE2, IT-3	
#3	7-682-973-19	SCREW +PSW 5X10	


5-2. CHASSIS-1

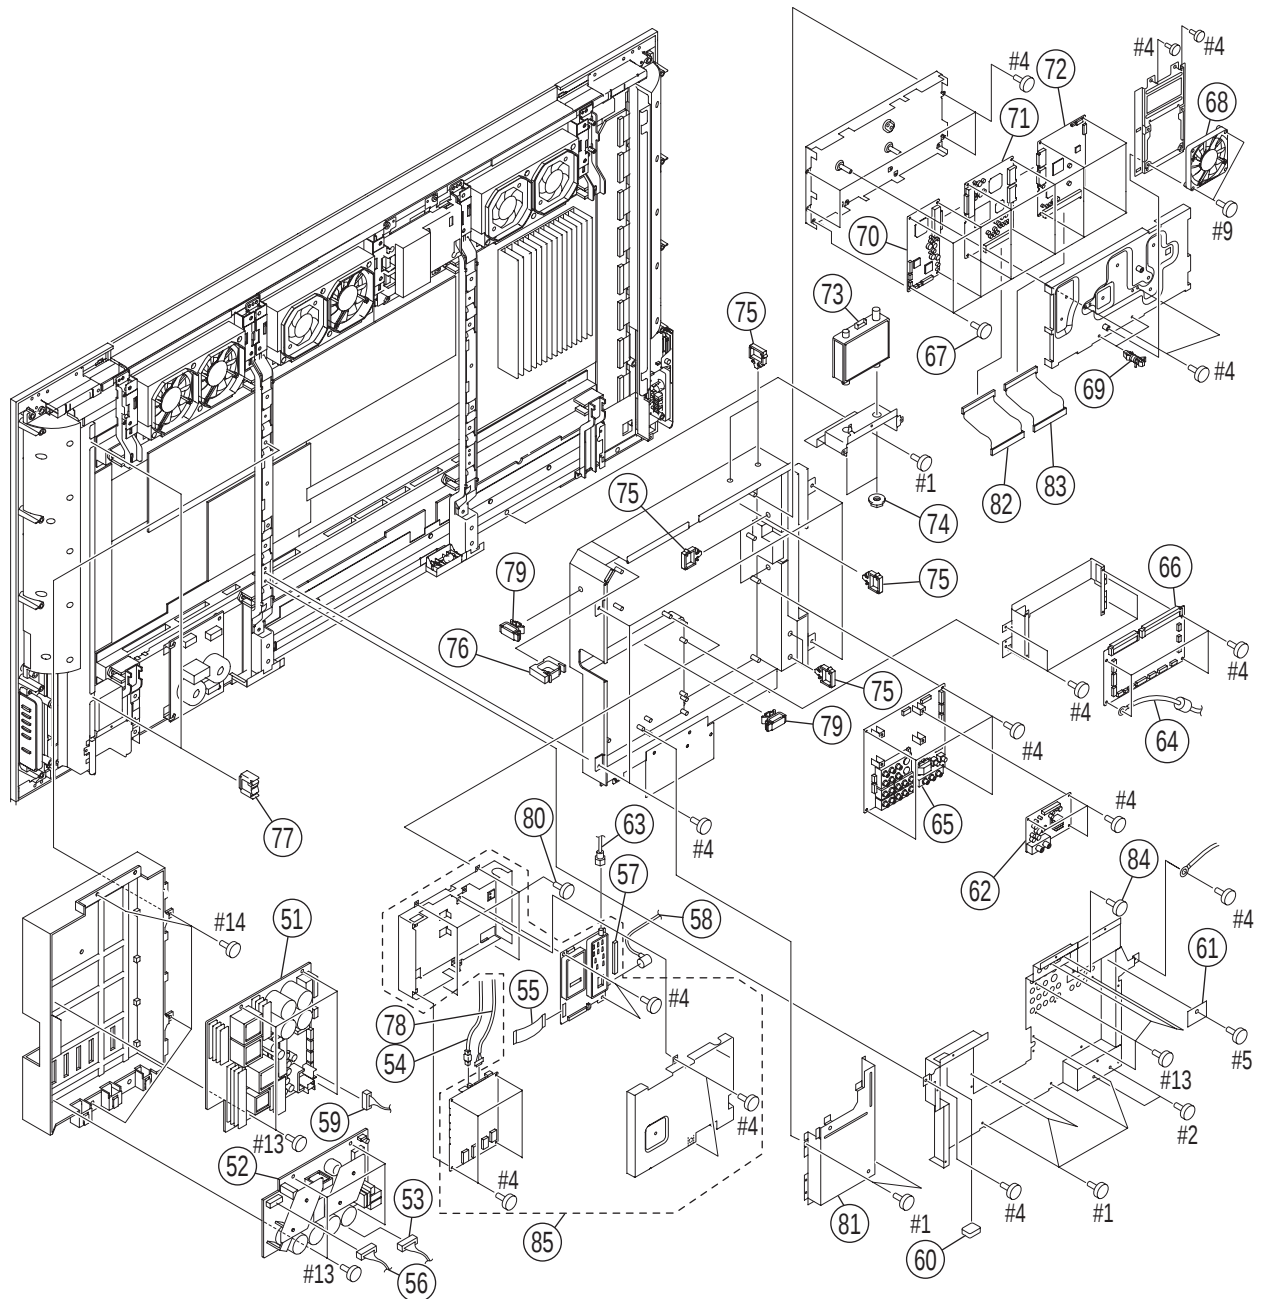

REF. No.	PART No.	DESCRIPTIONRE	MARK
51	* A-1061-620-A	G2N COMPL	
52	* A-1061-618-A	G1 COMPL	
53	* 1-910-003-99	CONNECTOR ASSY (VT2P)	
54	* 1-829-590-11	CABLE, USB	
55	1-910-008-68	CONNECTOR ASSY (FFC40P)	
56	* 1-910-016-69	CONNECTOR ASSY (VH5P)	
57	* 4-091-096-02	GASKET (D)	
58	* 1-829-361-11	RF CABLE	
59	* 1-910-004-01	CONNECTOR ASSY (ZH6P)	
60	2-176-107-01	CN COVER	
61	4-087-363-01	COVER, CONNECTOR	
62	* A-1074-834-B	P COMPL	
63	1-829-929-11	COAXIAL CABLE WITH F-PLUG	
64	1-830-376-11	HARNESS WITH CONNECTOR (LVDS)	
65	* A-1118-130-A	A1U COMPL	
66	* A-1061-615-A	A2NU COMPL	
67	3-669-145-02	SCREW	
68	1-787-333-11	FAN, DC	
69	* 3-952-863-01	SPACER, CIRCUIT BOARD	
70	* A-1123-498-A	DE3 COMPL	

REF. No.	PART No.	DESCRIPTIONRE	MARK
71	* A-1123-499-A	DIC3 COMPL	
72	* A-1123-496-A	M1U COMPL	
73	8-597-906-00	ANTENNA SWITCHE RFD-SA801	
74	3-682-691-00	NUT, WASHER HEXAGON	
75	* 3-919-255-01	HOLDER, PC BOARD	
76	2-187-364-01	EDGE HOLDER	
77	3-383-699-01	CLAMP (EDGE)	
78	1-830-419-11	LEAD WIRE WITH CONNECTOR(LVDS)	
79	* 4-098-147-11	CLAMP	
80	4-623-699-01	SCREW (3X5)	
81	X-2055-761-1	COVER 50 (W) ASSY, POT	
82	* A-1079-149-A	J1NU MOUNT	
83	* A-1079-150-A	J2NU MOUNT	
84	4-382-854-41	SCREW (M3X8), PSW (+)	
85	* A-1119-499-A	ATSC BLOCK ASSY	55, 57
#1	7-682-947-09	SCREW +PSW 3X6	
#2	7-685-663-79	SCREW +BVTP 4X16, TYPE2, IT-3	
#4	7-682-947-01	SCREW +PSW 3X6	
#5	7-682-949-09	SCREW +PSW 3X10	
#9	7-682-666-09	SCREW +PSW 4X20	
#13	7-685-648-79	SCREW +BVTP 3X12, TYPE2, IT-3	
#14	7-682-961-01	SCREW +PSW 4X8	


5-3. CHASSIS-2

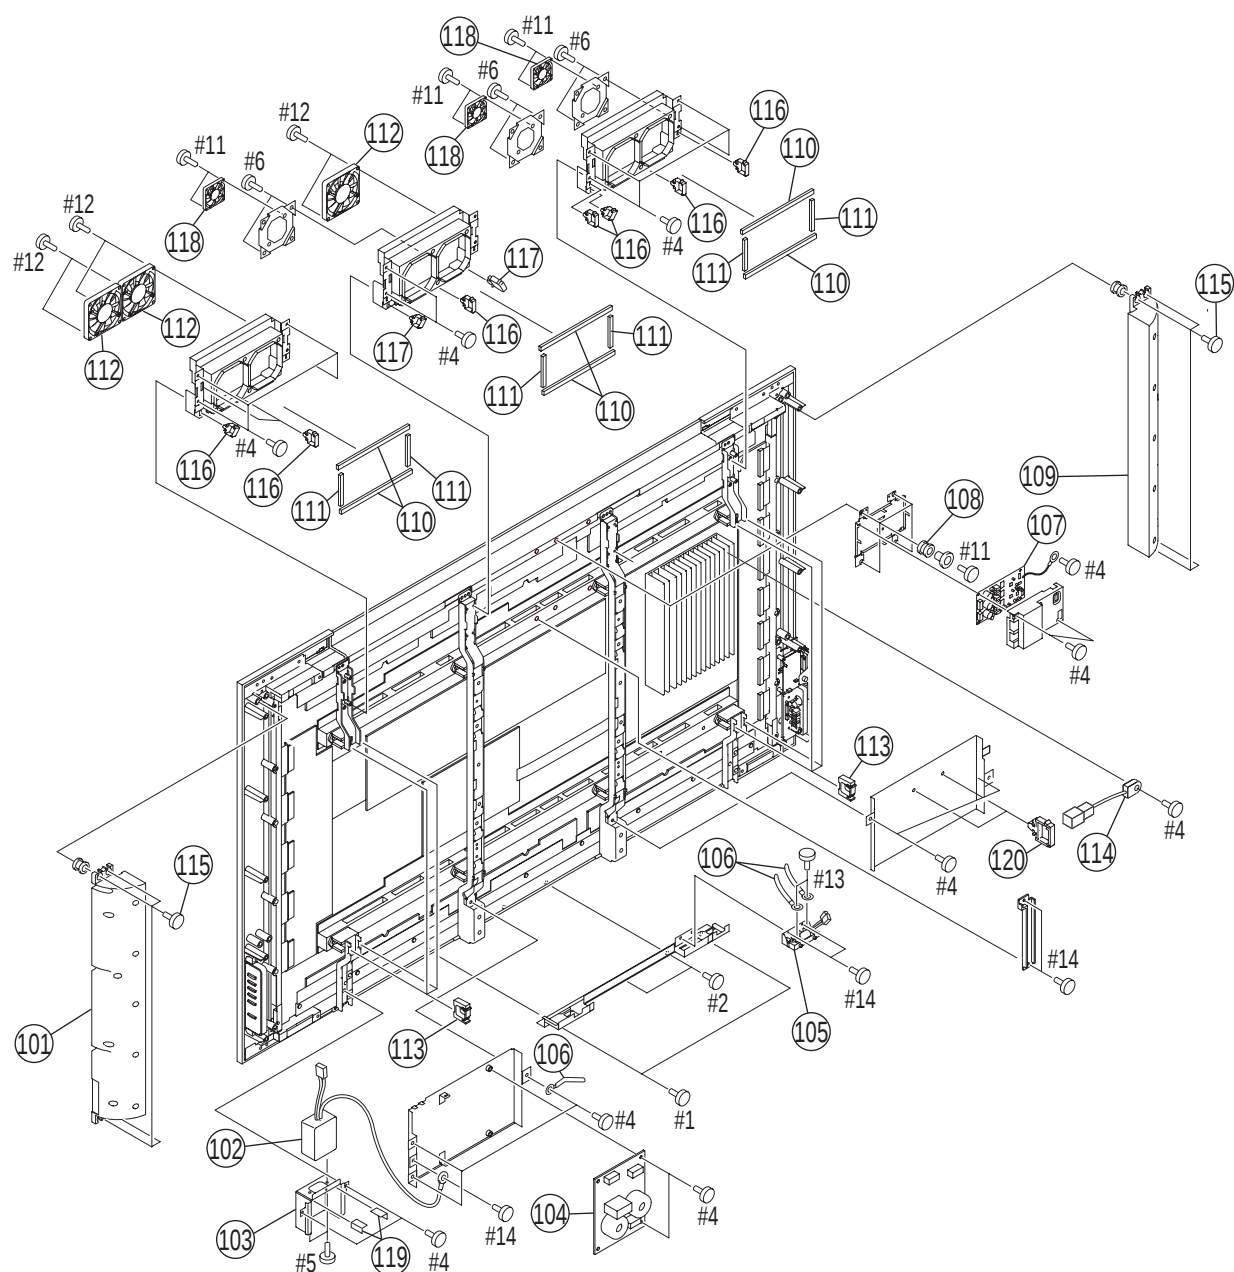

REF. No.	PART No.	DESCRIPTIONRE	MARK
101	1-825-946-23	LOUDSPEAKER (R)	
102	1-818-701-11	AC INLET (WITH NOISE FILTER)	
103	2-990-241-02	HOLDER (A), PLUG	
104	* A-1101-358-A	F MOUNT	
105	2-149-641-01	SP CONNECTOR HOLDER	
106	* 4-662-796-01	CLIP, COACHING	
107	* A-1088-595-A	K COMPL	
108	* 4-888-798-00	BUSHING, RUBBER	
109	1-825-946-13	LOUDSPEAKER (L)	
110	2-177-175-01	CUSHION FAN(A)	
111	2-177-176-01	CUSHION FAN(B)	
112	1-787-333-11	D. C FAN	
113	* 4-091-688-11	HOLDER, EDGE	
114	* 1-477-718-11	SENSOR, TEMPERATURE	
115	4-302-404-03	SCREW,WASHER HEAD (+P4X16)	

REF. No.	PART No.	DESCRIPTIONRE	MARK
116	* 4-098-147-11	CLAMP	
117	* 4-098-147-21	CLAMP	
118	1-763-659-11	FAN, DC	
119	4-087-332-21	TAPE, SHIELD	
120	* 3-919-255-01	HOLDER, PC BOARD	
#1	7-682-947-09	SCREW +PSW 3X6	
#2	7-685-663-79	SCREW +BVTP 4X16, TYPE2, IT-3	
#4	7-682-947-01	SCREW +PSW 3X6	
#5	7-682-949-09	SCREW +PSW 3X10	
#6	7-685-660-79	SCREW +BVTP 4X10, TYPE2, IT-3	
#11	7-682-965-01	SCREW +PSW 4X16	
#12	7-685-665-71	SCREW +BVTP 4X25, TYPE2, IT-3	
#13	7-685-648-79	SCREW +BVTP 3X12, TYPE2, IT-3	
#14	7-682-961-01	SCREW +PSW 4X8	


5-4. CHASSIS-3

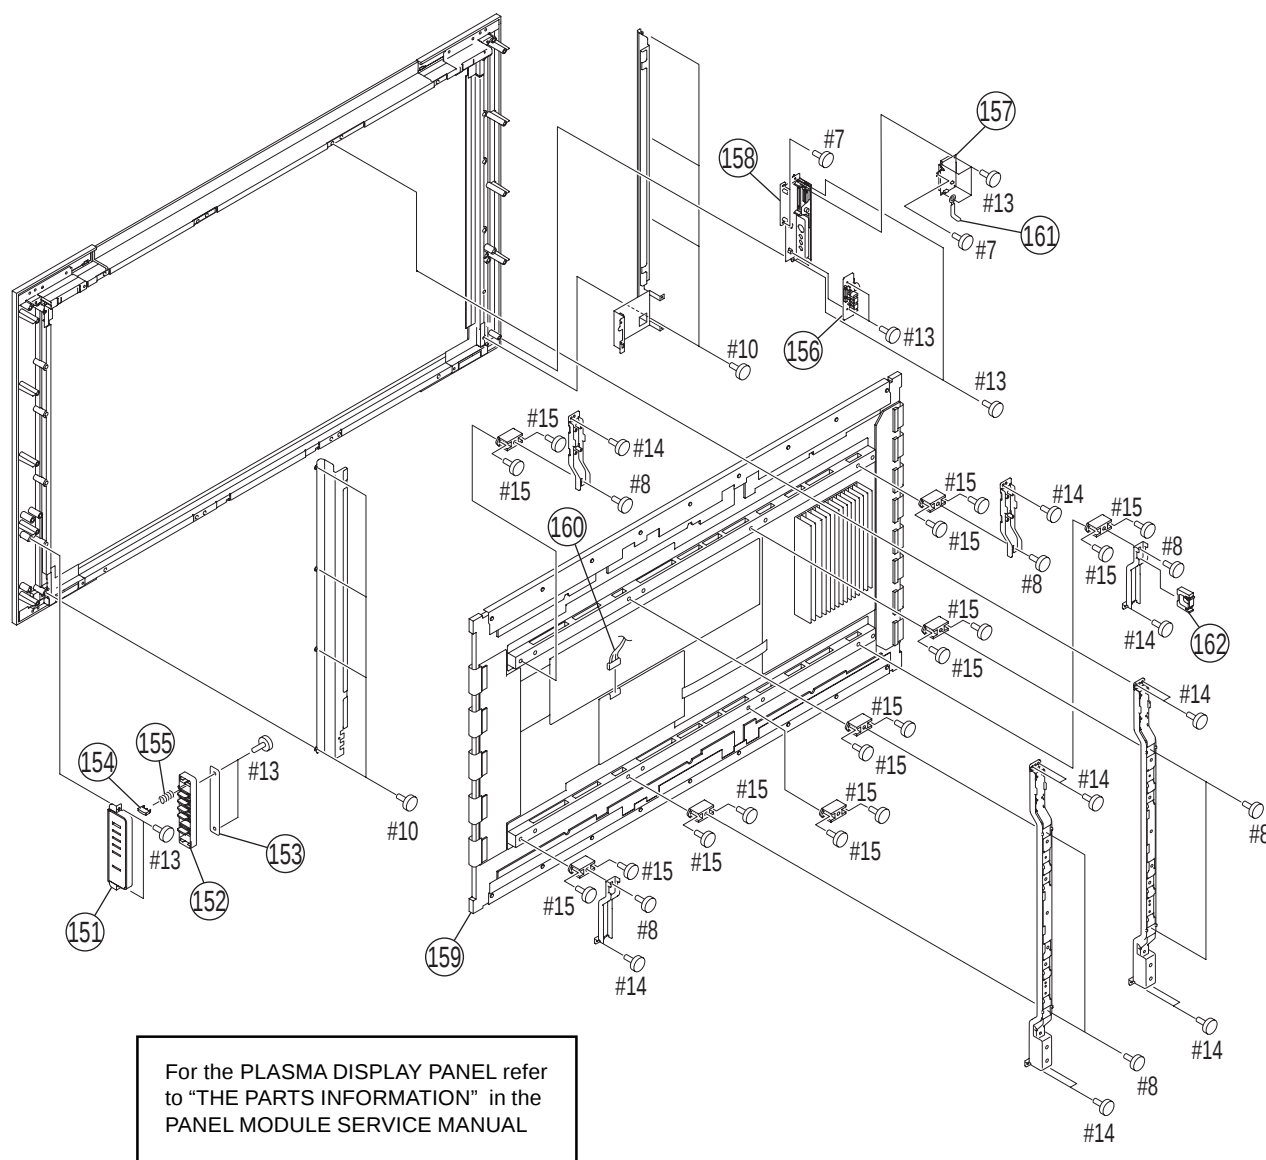

REF. No.	PART No.	DESCRIPTIONRE	MARK
151	2-149-607-41	CONTROL PANEL COVER	
152	2-149-614-01	MULTI BUTTON	
153	* A-1118-133-A	H1U MOUNT	
154	2-149-615-02	POWER BUTTON	
155	* 4-098-112-01	SPRING, COMPRESSION	
156	* A-1118-101-A	H2 MOUNT	
157	* A-1065-916-A	QH COMPL	
158	X-2023-006-5	CONNECTOR PANEL ASSY (XS)	
159		REFER TO PANEL MODULE S. M	
		PLASMA DISPLAY PANEL	
160	1-910-007-82	CONNECTOR ASSY (FI-W31S)	

REF. No.	PART No.	DESCRIPTIONRE	MARK
161	* 4-662-796-01	CLIP, COACHING	
162	* 3-919-255-01	HOLDER, PC BOARD	
#7	7-682-949-01	SCREW +PSW 3X10	
#8	7-682-973-11	SCREW +PSW 5X10	
#10	7-685-663-71	SCREW +BVTP 4X16, TYPE2, IT-3	
#13	7-685-648-79	SCREW +BVTP 3X12, TYPE2, IT-3	
#14	7-682-961-01	SCREW +PSW 4X8	
#15	7-682-962-01	SCREW +PSW 4X10	


5-5. CHASSIS-4

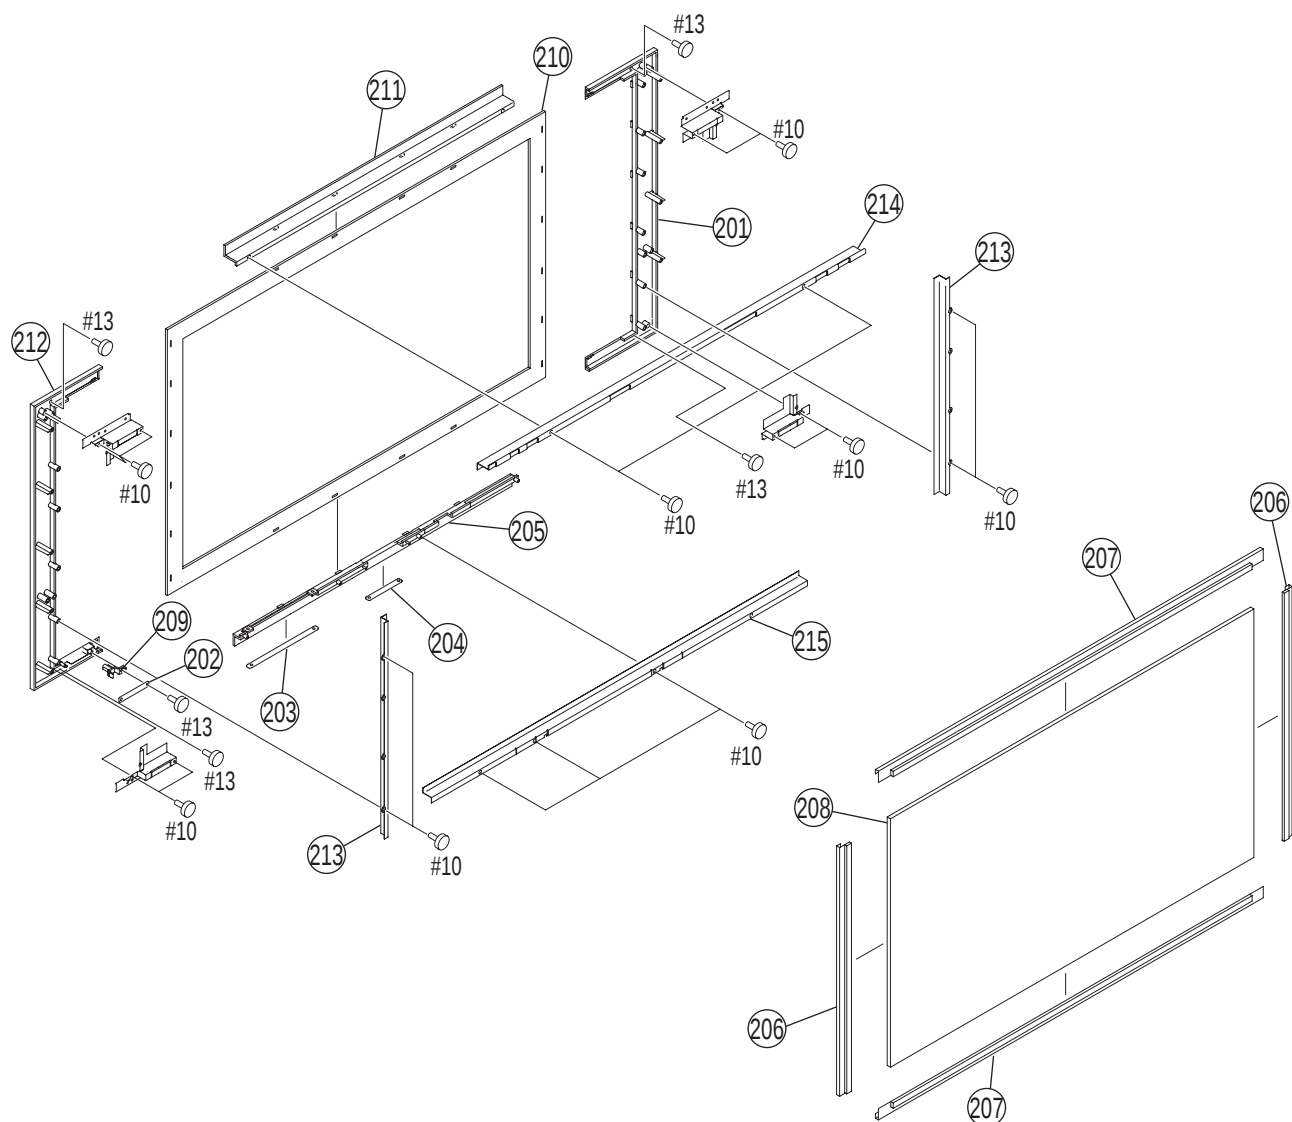

REF. No.	PART No.	DESCRIPTIONRE	MARK
201	X-2055-764-1	SPEAKER GRILL (W50L) ASSY	
202	* A-1118-136-A	H5 MOUNT	
203	* A-1118-134-A	H3 MOUNT	
204	* A-1118-135-A	H4 MOUNT	
205	X-2055-763-1	PANEL BOTTOM(W50)ASSY	
206	X-2059-347-1	GASKET FG(50V) ASSY	
207	X-2059-346-1	GASKET FG(50H) ASSY	
208	A-1116-019-A	OPTICAL FILTER GLASS ASSY	
209	X-2024-678-4	LIGHT GUIDE (BZ) ASSY	
210	2-109-305-03	BEZEL(50)	

REF. No.	PART No.	DESCRIPTIONRE	MARK
211	2-176-091-03	PANEL TOP(50)	
212	X-2023-745-5	SPEAKER GRILL(50XSR) ASSY	
213	X-2022-927-3	FRONT FRAME (50V) ASSY	
214	X-2022-925-4	FRONT FRAME (50T) ASSY	
215	X-2022-926-3	FRONT FRAME (50B) ASSY	
#10	7-685-663-71	SCREW +BVTP 4X16, TYPE2, IT-3	
#13	7-685-648-79	SCREW +BVTP 3X12, TYPE2, IT-3	

5-6. PACKING MATERIALS

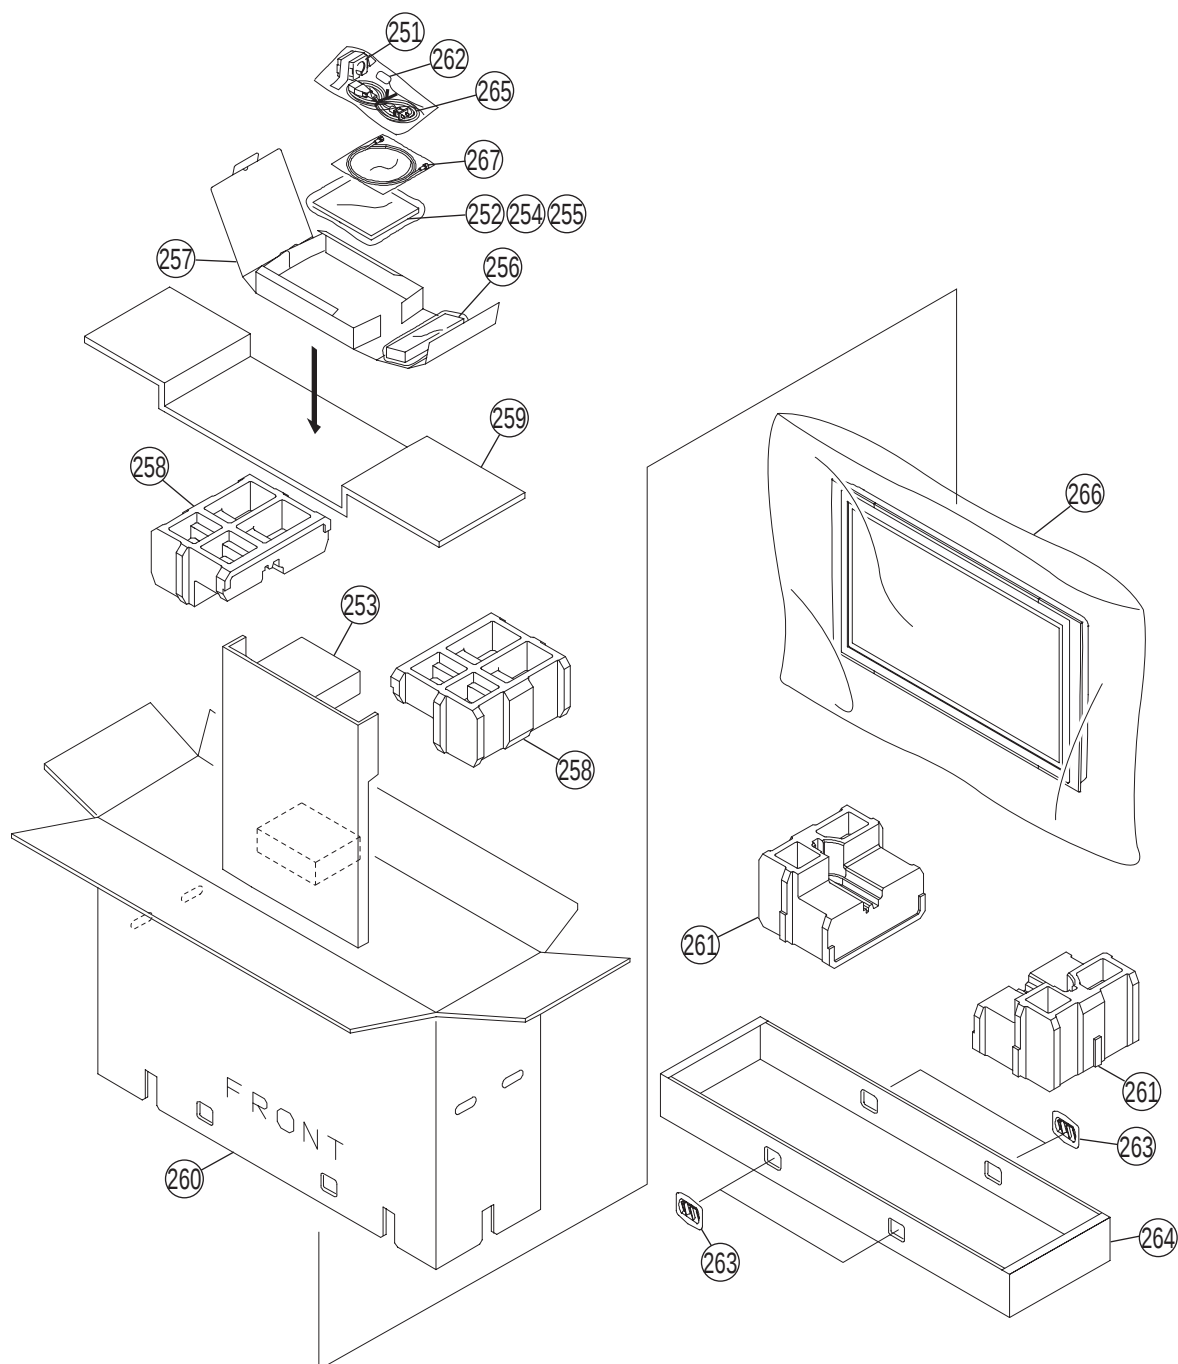

REF. No.	PART No.	DESCRIPTIONRE	MARK
251	2-990-242-01	HOLDER (B), PLUG	
252	2-598-695-11	GUIDE, QUICK SETUP	
253	* 2-190-807-02	CUSHION, FRONT	
254	X-2025-305-1	ASSY, CLEANING CLOTH	
255	2-598-696-11	MANUAL, INSTRUCTION	
256	1-479-409-11	REMOTE COMMANDER (RM-KA002)	
257	* 4-100-241-02	BOX, ACCESSORY	
258	* 2-148-444-02	CUSHION, UPPER	
259	* 2-103-514-01	BOARD, TOP	
260	* 2-595-909-01	INDIVIDUAL CARTON	

REF. No.	PART No.	DESCRIPTIONRE	MARK
261	* 2-597-705-01	CUSHION, LOWER	
262	2-188-888-01	REUSE LOCKING CLAMP	
263	* 4-030-895-01	JOINT	
264	* 2-103-513-01	TRAY	
265	▲ 1-827-117-11	POWER-SUPPLY CORD	
266	* 2-189-611-01	BAG, PROTECTION	
267	* 1-829-670-11	COAXIAL, CABLE WITH F-PLUG	

SECTION 6

ELECTRICAL PARTS LIST

NOTE:

The components identified $\triangle$ marked are critical for safety.
Replace only with the part number specified.

Les composants identifiés par la marque $\triangle$ sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

When indicating parts by reference number, please include the board name.

- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

RESISTORS

- All resistors are in ohms
- F : nonflammable

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1		G1	CAPACITOR	△	C6008	1-165-531-11	MYLAR 1UF 10 275V		
2		G1	CAPACITOR		C6101	1-115-350-51	CERAMIC 0.0047UF 2KV		
3		G1	CAPACITOR		C6102	1-115-350-51	CERAMIC 0.0047UF 2KV		
4		G1	CAPACITOR		C6103	1-115-350-51	CERAMIC 0.0047UF 2KV		
5		G1	CAPACITOR		C6104	1-115-350-51	CERAMIC 0.0047UF 2KV		
6		G1	CAPACITOR		C6105	1-107-974-11	CERAMIC 47PF 5.00% 2KV		
7		G1	CAPACITOR	△	C6106	1-107-680-91	ELECT 22UF 20.00% 450V		
8		G1	CAPACITOR		C6107	1-164-646-11	CERAMIC 2200PF 10.00% 500V		
9		G1	CAPACITOR		C6108	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
10		G1	CAPACITOR	△	C6111	1-119-886-51	CERAMIC 470PF 10.00% 250V		
11		G1	CAPACITOR		C6113	1-165-729-31	ELECT 470UF 20% 16V		
12		G1	CAPACITOR		C6114	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
13		G1	CAPACITOR		C6115	1-128-526-11	ELECT 100UF 20% 25V		
14		G1	CAPACITOR		C6116	1-107-910-11	ELECT 100UF 20% 50V		
15		G1	CAPACITOR		C6117	1-107-905-11	ELECT 4.7UF 20% 50V		
16		G1	CAPACITOR		C6118	1-107-903-11	ELECT 2.2UF 20% 50V		
17		G1	CAPACITOR		C6119	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
18		G1	CAPACITOR		C6120	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
19		G1	CAPACITOR		C6121	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
20		G1	CAPACITOR		C6202	1-104-760-11	CERAMIC CHIP 0.047UF 10.00% 50V		
21		G1	CAPACITOR		C6203	1-115-350-51	CERAMIC 0.0047UF 2KV		
22		G1	CAPACITOR		C6204	1-115-350-51	CERAMIC 0.0047UF 2KV		
23		G1	CAPACITOR		C6205	1-163-037-11	CERAMIC CHIP 0.022UF 10.00% 50V		
24		G1	CAPACITOR		C6206	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
25		G1	CAPACITOR		C6208	1-107-823-11	CERAMIC CHIP 0.47UF 10.00% 16V		
26		G1	CAPACITOR		C6209	1-115-350-51	CERAMIC 0.0047UF 2KV		
27		G1	CAPACITOR		C6210	1-115-350-51	CERAMIC 0.0047UF 2KV		
28		G1	CAPACITOR		C6212	1-112-024-21	MYLAR 1UF 10% 450V		
29		G1	CAPACITOR		C6213	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
30		G1	CAPACITOR		C6215	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
31		G1	CAPACITOR		C6216	1-163-021-91	CERAMIC CHIP 0.01UF 10.00% 50V		
32		G1	CAPACITOR		C6217	1-162-962-11	CERAMIC CHIP 470PF 10.00% 50V		
33		G1	CAPACITOR	△	C6218	1-119-886-51	CERAMIC 470PF 10.00% 250V		
34		G1	CAPACITOR		C6219	1-128-526-11	ELECT 100UF 20% 25V		
35		G1	CAPACITOR		C6220	1-163-037-11	CERAMIC CHIP 0.022UF 10.00% 50V		
36		G1	CAPACITOR		C6221	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
37		G1	CAPACITOR		C6222	1-107-889-11	ELECT 220UF 20% 25V		
38		G1	CAPACITOR		C6223	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
39		G1	CAPACITOR		C6225	1-163-021-91	CERAMIC CHIP 0.01UF 10.00% 50V		
40		G1	CAPACITOR		C6226	1-163-037-11	CERAMIC CHIP 0.022UF 10.00% 50V		
41		G1	CAPACITOR		C6227	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
42		G1	CAPACITOR		C6228	1-107-906-11	ELECT 10UF 20% 50V		
43		G1	CAPACITOR		C6229	1-115-416-11	CERAMIC CHIP 0.001UF 5.00% 25V		
44		G1	CAPACITOR		C6230	1-104-760-11	CERAMIC CHIP 0.047UF 10.00% 50V		
45		G1	CAPACITOR		C6231	1-100-613-81	CERAMIC 470PF 5% 1KV		
46		G1	CAPACITOR		C6232	1-100-613-81	CERAMIC 470PF 5% 1KV		
47		G1	CAPACITOR		C6233	1-163-145-00	CERAMIC CHIP 0.0015UF 5.00% 50V		
48		G1	CAPACITOR		C6234	1-163-037-11	CERAMIC CHIP 0.022UF 10.00% 50V		
49		G1	CAPACITOR		C6235	1-163-021-91	CERAMIC CHIP 0.01UF 10.00% 50V		
50		G1	CAPACITOR		C6236	1-100-613-81	CERAMIC 470PF 5% 1KV		
51		G1	CAPACITOR		C6237	1-100-613-81	CERAMIC 470PF 5% 1KV		
52		G1	CAPACITOR		C6238	1-112-312-11	ELECT(BLOCK) 270UF 20% 450V		
53		G1	CAPACITOR		C6239	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
54		G1	CAPACITOR		C6240	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
55		G1	CAPACITOR		C6241	1-163-021-91	CERAMIC CHIP 0.01UF 10.00% 50V		
56		G1	CAPACITOR		C6242	1-112-312-11	ELECT(BLOCK) 270UF 20% 450V		
57		G1	CAPACITOR		C6243	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
58		G1	CAPACITOR		C6244	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
59		G1	CAPACITOR		C6245	1-163-021-91	CERAMIC CHIP 0.01UF 10.00% 50V		
60		G1	CAPACITOR		C6246	1-163-021-91	CERAMIC CHIP 0.01UF 10.00% 50V		
61		G1	CAPACITOR		C6247	1-107-905-11	ELECT 4.7UF 20% 50V		
62		G1	CAPACITOR		C6248	1-107-888-11	ELECT 47UF 20% 25V		
63		G1	CAPACITOR		C6249	1-107-905-11	ELECT 4.7UF 20% 50V		
64		G1	CAPACITOR		C6250	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
65		G1	CAPACITOR		C6251	1-107-902-11	ELECT 1UF 20% 50V		
66		G1	CAPACITOR		C6252	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
67		G1	CAPACITOR		C6253	1-107-910-11	ELECT 100UF 20% 50V		
68		G1	CAPACITOR		C6254	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
69		G1	CAPACITOR		C6255	1-112-312-11	ELECT(BLOCK) 270UF 20% 450V		
70		G1	CAPACITOR		C6256	1-112-312-11	ELECT(BLOCK) 270UF 20% 450V		
71		G1	CAPACITOR		C6258	1-112-188-11	MYLAR 1.5UF 5% 450V		
72		G1	CAPACITOR		C6259	1-112-188-11	MYLAR 1.5UF 5% 450V		
73		G1	CAPACITOR		C6901	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
74		G1	CAPACITOR		C6905	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
75		G1	CONNECTOR	*	CN6014	1-580-843-11	PIN, CONNECTOR (POWER)		
76		G1	CONNECTOR		CN6901	1-573-806-91	PIN, CONNECTOR 6P		
77		G1	DIODE		D6021	8-719-081-97	DIODE MMDL914T1		
78		G1	DIODE	△	D6100	8-719-077-76	DIODE D2SB60A-F04		
79		G1	DIODE		D6101	8-719-036-94	DIODE RD5.6SB-T1		
80		G1	DIODE		D6102	6-500-849-01	DIODE ERA22-08KFLB		
81		G1	DIODE		D6103	6-500-567-31	DIODE 10ERB20-TB3		
82		G1	DIODE		D6104	6-500-567-31	DIODE 10ERB20-TB3		
83		G1	DIODE		D6105	6-500-567-31	DIODE 10ERB20-TB3		
84		G1	DIODE		D6106	8-719-080-75	DIODE M1FL20U-4063		
85		G1	DIODE		D6201	8-719-304-63	DIODE RM11C		
86		G1	DIODE		D6202	6-500-254-01	DIODE MM3Z7V5T1		
87		G1	DIODE		D6203	8-719-081-97	DIODE MMDL914T1		
88		G1	DIODE		D6204	8-719-056-84	DIODE UDZ-TE-17-7.5B		
89		G1	DIODE		D6205	8-719-054-89	DIODE D15XB60		
90		G1	DIODE		D6206	8-719-081-97	DIODE MMDL914T1		
91		G1	DIODE		D6207	6-500-137-01	DIODE BAT54HT1		
92		G1	DIODE		D6208	8-719-304-63	DIODE RM11C		
93		G1	DIODE		D6209	6-500-254-01	DIODE MM3Z7V5T1		
94		G1	DIODE		D6210	6-500-137-01	DIODE BAT54HT1		
95		G1	DIODE		D6211	6-500-137-01	DIODE BAT54HT1		
96		G1	DIODE		D6212	8-719-041-97	DIODE MA113-(TX)		
97		G1	DIODE		D6213	8-719-041-97	DIODE MA113-(TX)		
98		G1	DIODE		D6214	8-719-082-03	DIODE MM3Z15VT1		
99		G1	DIODE		D6215	8-719-082-03	DIODE MM3Z15VT1		
100		G1	DIODE		D6216	8-719-304-63	DIODE RM11C		
101		G1	DIODE		D6217	6-500-407-01	DIODE SF20L60U-4015		
102		G1	DIODE		D6218	8-719-081-97	DIODE MMDL914T1		
103		G1	DIODE		D6219	8-719-059-51	DIODE MA3J142E0LSO		
104		G1	DIODE		D6220	8-719-082-03	DIODE MM3Z15VT1		
105		G1	DIODE		D6221	8-719-082-03	DIODE MM3Z15VT1		
106		G1	DIODE		D6222	8-719-041-97	DIODE MA113-(TX)		
107		G1	DIODE		D6223	8-719-082-03	DIODE MM3Z15VT1		
108		G1	DIODE		D6224	8-719-082-03	DIODE MM3Z15VT1		
109		G1	DIODE		D6225	6-500-849-01	DIODE ERA22-08KFLB		
110		G1	DIODE		D6226	6-500-849-01	DIODE ERA22-08KFLB		
111		G1	DIODE		D6900	8-719-081-97	DIODE MMDL914T1		
112		G1	IC		IC6101	6-600-279-01	IC STR-A6169		
113		G1	IC		IC6102	8-759-682-42	IC MM1431ATT		
114		G1	IC		IC6201	6-704-924-01	IC PQ12DZ5UJ00H		
115		G1	IC		IC6202	6-703-132-01	IC UC3854BN		
116		G1	IC		IC6203	8-759-058-50	IC XRA10324AF		
117		G1	IC		IC6204	8-759-682-42	IC MM1431ATT		
118		G1	COIL		L6101	1-412-537-31	INDUCTOR 100UH		
119		G1	COIL		L6201	1-456-854-11	INDUCTOR 58UH		
120		G1	COIL		L6202	1-456-855-11	INDUCTOR 100UH		
121		G1	COIL		L6203	1-456-854-11	INDUCTOR 58UH		
122		G1	PHOTO COUPLER	△	PH6101	6-600-187-01	PHOTO COUPLER PC123Y22JOOF		
123		G1	PHOTO COUPLER	△	PH6904	6-600-187-01	PHOTO COUPLER PC123Y22JOOF		
124		G1	PHOTO COUPLER	△	PH6905	6-600-187-01	PHOTO COUPLER PC123Y22JOOF		
125		G1	TRANSISTOR		Q6201	8-729-040-89	TRANSISTOR 2SK1590-T1B		
126		G1	TRANSISTOR		Q6202	8-729-907-00	TRANSISTOR DTC114EU		
127		G1	TRANSISTOR		Q6203	8-729-820-86	TRANSISTOR 2SB1121-ST		
128		G1	TRANSISTOR		Q6204	8-729-905-35	TRANSISTOR 2SC4081-R		
129		G1	TRANSISTOR		Q6205	8-729-807-17	TRANSISTOR 2SD1621-S		
130		G1	TRANSISTOR		Q6206	6-550-372-01	TRANSISTOR SPA20N60C3E8152		
131		G1	TRANSISTOR		Q6207	6-550-372-01	TRANSISTOR SPA20N60C3E8152		
132		G1	TRANSISTOR		Q6208	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		
133		G1	TRANSISTOR		Q6209	8-729-905-35	TRANSISTOR 2SC4081-R		
134		G1	TRANSISTOR		Q6210	8-729-905-35	TRANSISTOR 2SC4081-R		
135		G1	TRANSISTOR		Q6211	8-729-905-35	TRANSISTOR 2SC4081-R		
136		G1	TRANSISTOR		Q6212	8-729-905-35	TRANSISTOR 2SC4081-R		
137		G1	TRANSISTOR		Q6213	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		
138		G1	TRANSISTOR		Q6214	8-729-907-00	TRANSISTOR DTC114EU		
139		G1	TRANSISTOR		Q6215	8-729-905-35	TRANSISTOR 2SC4081-R		
140		G1	TRANSISTOR		Q6216	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		
141		G1	TRANSISTOR		Q6217	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		
142		G1	TRANSISTOR		Q6218	8-729-804-41	TRANSISTOR 2SB1122-S		
143		G1	TRANSISTOR		Q6219	6-550-372-01	TRANSISTOR SPA20N60C3E8152		
144		G1	TRANSISTOR		Q6903	8-729-907-00	TRANSISTOR DTC114EU		
145		G1	TRANSISTOR		Q6915	8-729-023-22	TRANSISTOR 2SD2114K		
146		G1	RESISTOR		R6003	1-216-864-11	SHORT CHIP 0		
147		G1	RESISTOR		R6005	1-202-962-11	CEMENTED 3.3 5% 10W		
148		G1	RESISTOR		R6006	1-202-962-11	CEMENTED 3.3 5% 10W		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
149		G1	RESISTOR		R6007	1-217-781-31	FUSIBLE 2.2 5% 5W		
150		G1	RESISTOR		R6101	1-216-353-00	METAL OXIDE 2.2 5% 1W		
151		G1	RESISTOR		R6102	1-249-381-11	CARBON 1 5% 1/4W		
152		G1	RESISTOR		R6103	1-243-725-71	METAL OXIDE 100K 5% 1W		
153		G1	RESISTOR		R6104	1-216-864-11	SHORT CHIP 0		
154		G1	RESISTOR		R6105	1-249-393-11	CARBON 10 5% 1/4W		
155		G1	RESISTOR		R6106	1-249-393-11	CARBON 10 5% 1/4W		
156		G1	RESISTOR		R6107	1-216-821-11	METAL CHIP 1K 5% 1/10W		
157		G1	RESISTOR		R6108	1-216-817-11	METAL CHIP 470 5% 1/10W		
158		G1	RESISTOR		R6109	1-216-839-11	METAL CHIP 33K 5% 1/10W		
159		G1	RESISTOR		R6110	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
160		G1	RESISTOR		R6111	1-216-864-11	SHORT CHIP 0		
161		G1	RESISTOR		R6112	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
162		G1	RESISTOR		R6113	1-208-830-11	METAL CHIP 100K 0.5% 1/10W		
163		G1	RESISTOR		R6114	1-208-830-11	METAL CHIP 100K 0.5% 1/10W		
164		G1	RESISTOR		R6115	1-208-830-11	METAL CHIP 100K 0.5% 1/10W		
165		G1	RESISTOR		R6116	1-208-830-11	METAL CHIP 100K 0.5% 1/10W		
166		G1	RESISTOR		R6117	1-208-830-11	METAL CHIP 100K 0.5% 1/10W		
167		G1	RESISTOR		R6118	1-208-830-11	METAL CHIP 100K 0.5% 1/10W		
168		G1	RESISTOR		R6119	1-208-830-11	METAL CHIP 100K 0.5% 1/10W		
169		G1	RESISTOR		R6120	1-208-830-11	METAL CHIP 100K 0.5% 1/10W		
170		G1	RESISTOR		R6121	1-208-830-11	METAL CHIP 100K 0.5% 1/10W		
171		G1	RESISTOR		R6122	1-208-830-11	METAL CHIP 100K 0.5% 1/10W		
172		G1	RESISTOR		R6123	1-208-830-11	METAL CHIP 100K 0.5% 1/10W		
173		G1	RESISTOR		R6124	1-208-830-11	METAL CHIP 100K 0.5% 1/10W		
174		G1	RESISTOR		R6125	1-216-841-11	METAL CHIP 47K 5% 1/10W		
175		G1	RESISTOR		R6202	1-216-857-11	METAL CHIP 1M 5% 1/10W		
176		G1	RESISTOR		R6203	1-218-899-11	METAL CHIP 150K 0.5% 1/16W		
177		G1	RESISTOR		R6204	1-245-470-21	METAL 220K 1% 1/4W		
178		G1	RESISTOR		R6205	1-245-474-21	METAL 330K 1% 1/4W		
179		G1	RESISTOR		R6206	1-245-474-21	METAL 330K 1% 1/4W		
180		G1	RESISTOR		R6207	1-218-895-11	METAL CHIP 100K 0.5% 1/10W		
181		G1	RESISTOR		R6208	1-245-470-21	METAL 220K 1% 1/4W		
182		G1	RESISTOR		R6209	1-245-474-21	METAL 330K 1% 1/4W		
183		G1	RESISTOR		R6210	1-245-474-21	METAL 330K 1% 1/4W		
184		G1	RESISTOR		R6211	1-218-877-11	METAL CHIP 18K 0.5% 1/10W		
185		G1	RESISTOR		R6212	1-245-470-21	METAL 220K 1% 1/4W		
186		G1	RESISTOR		R6213	1-245-474-21	METAL 330K 1% 1/4W		
187		G1	RESISTOR		R6214	1-245-474-21	METAL 330K 1% 1/4W		
188		G1	RESISTOR		R6215	1-216-121-11	RES-CHIP 1M 5% 1/10W		
189		G1	RESISTOR		R6216	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
190		G1	RESISTOR		R6217	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
191		G1	RESISTOR		R6218	1-218-875-11	METAL CHIP 15K 0.5% 1/10W		
192		G1	RESISTOR		R6219	1-216-857-11	METAL CHIP 1M 5% 1/10W		
193		G1	RESISTOR		R6220	1-216-830-11	METAL CHIP 5.6K 5% 1/10W		
194		G1	RESISTOR		R6222	1-216-837-11	METAL CHIP 22K 5% 1/10W		
195		G1	RESISTOR		R6223	1-243-665-11	METAL 0.05 5% 5W		
196		G1	RESISTOR		R6224	1-243-665-11	METAL 0.05 5% 5W		
197		G1	RESISTOR		R6225	1-249-393-11	CARBON 10 5% 1/4W		
198		G1	RESISTOR		R6226	1-216-801-11	METAL CHIP 22 5% 1/10W		
199		G1	RESISTOR		R6227	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
200		G1	RESISTOR		R6228	1-216-837-11	METAL CHIP 22K 5% 1/10W		
201		G1	RESISTOR		R6229	1-249-393-11	CARBON 10 5% 1/4W		
202		G1	RESISTOR		R6230	1-216-833-11	METAL CHIP 10K 5% 1/10W		
203		G1	RESISTOR		R6231	1-216-801-11	METAL CHIP 22 5% 1/10W		
204		G1	RESISTOR		R6232	1-216-833-11	METAL CHIP 10K 5% 1/10W		
205		G1	RESISTOR		R6233	1-249-393-11	CARBON 10 5% 1/4W		
206		G1	RESISTOR		R6234	1-249-401-11	CARBON 47 5% 1/4W		
207		G1	RESISTOR		R6236	1-216-837-11	METAL CHIP 22K 5% 1/10W		
208		G1	RESISTOR		R6237	1-249-393-11	CARBON 10 5% 1/4W		
209		G1	RESISTOR		R6238	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
210		G1	RESISTOR		R6239	1-216-849-11	METAL CHIP 220K 5% 1/10W		
211		G1	RESISTOR		R6240	1-216-833-11	METAL CHIP 10K 5% 1/10W		
212		G1	RESISTOR		R6241	1-216-837-11	METAL CHIP 22K 5% 1/10W		
213		G1	RESISTOR		R6242	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
214		G1	RESISTOR		R6243	1-216-833-11	METAL CHIP 10K 5% 1/10W		
215		G1	RESISTOR		R6244	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
216		G1	RESISTOR		R6245	1-218-851-11	METAL CHIP 1.5K 0.5% 1/10W		
217		G1	RESISTOR		R6246	1-218-869-11	METAL CHIP 8.2K 0.5% 1/10W		
218		G1	RESISTOR		R6247	1-208-830-11	METAL CHIP 100K 0.5% 1/10W		
219		G1	RESISTOR		R6248	1-208-830-11	METAL CHIP 100K 0.5% 1/10W		
220		G1	RESISTOR		R6249	1-208-830-11	METAL CHIP 100K 0.5% 1/10W		
221		G1	RESISTOR		R6250	1-216-845-11	METAL CHIP 100K 5% 1/10W		
222		G1	RESISTOR		R6251	1-216-835-11	METAL CHIP 15K 5% 1/10W		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
223		G1	RESISTOR		R6252	1-216-837-11	METAL CHIP 22K 5% 1/10W		
224		G1	RESISTOR		R6253	1-215-882-00	METAL OXIDE 22 5% 2W		
225		G1	RESISTOR		R6254	1-215-882-00	METAL OXIDE 22 5% 2W		
226		G1	RESISTOR		R6255	1-216-121-11	RES-CHIP 1M 5% 1/10W		
227		G1	RESISTOR		R6256	1-216-833-11	METAL CHIP 10K 5% 1/10W		
228		G1	RESISTOR		R6257	1-216-821-11	METAL CHIP 1K 5% 1/10W		
229		G1	RESISTOR		R6258	1-216-841-11	METAL CHIP 47K 5% 1/10W		
230		G1	RESISTOR		R6259	1-216-833-11	METAL CHIP 10K 5% 1/10W		
231		G1	RESISTOR		R6260	1-216-833-11	METAL CHIP 10K 5% 1/10W		
232		G1	RESISTOR		R6261	1-216-809-11	METAL CHIP 100 5% 1/10W		
233		G1	RESISTOR		R6262	1-208-830-11	METAL CHIP 100K 0.5% 1/10W		
234		G1	RESISTOR		R6263	1-208-830-11	METAL CHIP 100K 0.5% 1/10W		
235		G1	RESISTOR		R6264	1-208-830-11	METAL CHIP 100K 0.5% 1/10W		
236		G1	RESISTOR		R6265	1-216-837-11	METAL CHIP 22K 5% 1/10W		
237		G1	RESISTOR		R6266	1-216-847-11	METAL CHIP 150K 5% 1/10W		
238		G1	RESISTOR		R6267	1-216-833-11	METAL CHIP 10K 5% 1/10W		
239		G1	RESISTOR		R6268	1-216-821-11	METAL CHIP 1K 5% 1/10W		
240		G1	RESISTOR		R6269	1-216-821-11	METAL CHIP 1K 5% 1/10W		
241		G1	RESISTOR		R6270	1-216-821-11	METAL CHIP 1K 5% 1/10W		
242		G1	RESISTOR		R6271	1-216-841-11	METAL CHIP 47K 5% 1/10W		
243		G1	RESISTOR		R6272	1-216-833-11	METAL CHIP 10K 5% 1/10W		
244		G1	RESISTOR		R6273	1-216-821-11	METAL CHIP 1K 5% 1/10W		
245		G1	RESISTOR		R6274	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
246		G1	RESISTOR		R6275	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
247		G1	RESISTOR		R6276	1-216-841-11	METAL CHIP 47K 5% 1/10W		
248		G1	RESISTOR		R6277	1-216-797-11	METAL CHIP 10 5% 1/10W		
249		G1	RESISTOR		R6278	1-216-849-11	METAL CHIP 220K 5% 1/10W		
250		G1	RESISTOR		R6279	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
251		G1	RESISTOR		R6280	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
252		G1	RESISTOR		R6281	1-216-833-11	METAL CHIP 10K 5% 1/10W		
253		G1	RESISTOR		R6282	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W		
254		G1	RESISTOR		R6283	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
255		G1	RESISTOR		R6284	1-218-851-11	METAL CHIP 1.5K 0.5% 1/10W		
256		G1	RESISTOR		R6285	1-216-833-11	METAL CHIP 10K 5% 1/10W		
257		G1	RESISTOR		R6286	1-216-841-11	METAL CHIP 47K 5% 1/10W		
258		G1	RESISTOR		R6287	1-216-833-11	METAL CHIP 10K 5% 1/10W		
259		G1	RESISTOR		R6288	1-216-833-11	METAL CHIP 10K 5% 1/10W		
260		G1	RESISTOR		R6289	1-216-833-11	METAL CHIP 10K 5% 1/10W		
261		G1	RESISTOR		R6290	1-216-841-11	METAL CHIP 47K 5% 1/10W		
262		G1	RESISTOR		R6291	1-216-833-11	METAL CHIP 10K 5% 1/10W		
263		G1	RESISTOR		R6292	1-249-393-11	CARBON 10 5% 1/4W		
264		G1	RESISTOR		R6293	1-216-837-11	METAL CHIP 22K 5% 1/10W		
265		G1	RESISTOR		R6294	1-216-833-11	METAL CHIP 10K 5% 1/10W		
266		G1	RESISTOR		R6297	1-249-393-11	CARBON 10 5% 1/4W		
267		G1	RESISTOR		R6298	1-216-801-11	METAL CHIP 22 5% 1/10W		
268		G1	RESISTOR		R6299	1-216-833-11	METAL CHIP 10K 5% 1/10W		
269		G1	RESISTOR		R6901	1-216-835-11	METAL CHIP 15K 5% 1/10W		
270		G1	RESISTOR		R6902	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
271		G1	RESISTOR		R6905	1-216-821-11	METAL CHIP 1K 5% 1/10W		
272		G1	RESISTOR		R6910	1-216-817-11	METAL CHIP 470 5% 1/10W		
273		G1	RESISTOR		R6911	1-216-864-11	SHORT CHIP 0		
274		G1	VARIABLE RESISTOR		RV6201	1-225-626-91	RES, VAR, ADJ, CERMET 1K		
275		G1	RELAY	△	RY6001	1-755-543-11	POWER RELAY		
276		G1	RELAY	△	RY6002	1-755-543-11	POWER RELAY		
277		G1	TRANSFORMER	△	T6101	1-443-313-11	TRANSFORMER, CONVERTER (SBT)		
278		G1	THERMISTOR		TH6101	1-803-586-11	THERMISTOR, NTC		
279		G1	THERMISTOR		TH6201	1-809-789-71	THERMISTOR, POSITIVE		
280		G2N	CAPACITOR		C6301	1-137-639-21	MYLAR 0.47UF 10% 450V		
281		G2N	CAPACITOR		C6302	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
282		G2N	CAPACITOR		C6304	1-107-905-11	ELECT 4.7UF 20% 50V		
283		G2N	CAPACITOR		C6305	1-107-909-11	ELECT 47UF 20% 50V		
284		G2N	CAPACITOR		C6306	1-100-831-91	CERAMIC CHIP 0.001UF 2% 50V		
285		G2N	CAPACITOR		C6307	1-107-906-11	ELECT 10UF 20% 50V		
286		G2N	CAPACITOR		C6308	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
287		G2N	CAPACITOR		C6309	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
288		G2N	CAPACITOR		C6310	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V		
289		G2N	CAPACITOR		C6311	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
290		G2N	CAPACITOR		C6313	1-107-888-11	ELECT 47UF 20% 25V		
291		G2N	CAPACITOR		C6315	1-107-910-11	ELECT 100UF 20% 50V		
292		G2N	CAPACITOR		C6316	1-107-824-11	CERAMIC 220PF 5.00% 1KV		
293		G2N	CAPACITOR		C6317	1-107-824-11	CERAMIC 220PF 5.00% 1KV		
294		G2N	CAPACITOR		C6318	1-100-919-11	FILM 0.027UF 3% 1KV		
295		G2N	CAPACITOR		C6401	1-128-951-31	ELECT 2200UF 20% 16V		
296		G2N	CAPACITOR		C6402	1-107-909-11	ELECT 47UF 20% 50V		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
297		G2N	CAPACITOR		C6403	1-107-914-11	ELECT 1000UF 20% 50V		
298		G2N	CAPACITOR		C6404	1-107-929-11	ELECT 10UF 20% 100V		
299		G2N	CAPACITOR		C6405	1-128-959-31	ELECT 1000UF 20% 35V		
300		G2N	CAPACITOR		C6406	1-104-760-11	CERAMIC CHIP 0.047UF 10.00% 50V		
301		G2N	CAPACITOR		C6407	1-128-951-31	ELECT 2200UF 20% 16V		
302		G2N	CAPACITOR		C6408	1-128-951-31	ELECT 2200UF 20% 16V		
303		G2N	CAPACITOR		C6409	1-107-928-11	ELECT 4.7UF 20% 100V		
304		G2N	CAPACITOR		C6410	1-128-951-31	ELECT 2200UF 20% 16V		
305		G2N	CAPACITOR		C6412	1-100-118-21	ELECT CHIP 82UF 20% 16V		
306		G2N	CAPACITOR		C6413	1-107-877-11	ELECT 1000UF 20% 10V		
307		G2N	CAPACITOR		C6414	1-107-884-11	ELECT 1000UF 20% 16V		
308		G2N	CAPACITOR		C6417	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
309		G2N	CAPACITOR		C6418	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
310		G2N	CAPACITOR		C6419	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
311		G2N	CAPACITOR		C6420	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
312		G2N	CAPACITOR		C6421	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
313		G2N	CAPACITOR		C6422	1-162-967-11	CERAMIC CHIP 0.0033UF 10.00% 50V		
314		G2N	CAPACITOR		C6423	1-162-969-11	CERAMIC CHIP 0.0068UF 10.00% 25V		
315		G2N	CAPACITOR		C6426	1-104-653-11	ELECT 220UF 20% 16V		
316		G2N	CAPACITOR		C6427	1-104-652-11	ELECT 470UF 20% 10V		
317		G2N	CAPACITOR		C6428	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
318		G2N	CAPACITOR		C6429	1-127-820-11	CERAMIC CHIP 4.7UF 10% 16V		
319		G2N	CAPACITOR		C6430	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
320		G2N	CAPACITOR		C6431	1-135-960-91	CERAMIC CHIP 10UF 10% 25V		
321		G2N	CAPACITOR		C6432	1-135-960-91	CERAMIC CHIP 10UF 10% 25V		
322		G2N	CAPACITOR		C6433	1-107-888-11	ELECT 47UF 20% 25V		
323		G2N	CAPACITOR		C6434	1-100-398-21	ELECT 270UF 20% 10V		
324		G2N	CAPACITOR		C6435	1-128-528-11	ELECT 470UF 20% 25V		
325		G2N	CAPACITOR		C6436	1-128-951-31	ELECT 2200UF 20% 16V		
326		G2N	CAPACITOR		C6439	1-107-823-11	CERAMIC CHIP 0.47UF 10.00% 16V		
327		G2N	CAPACITOR		C6443	1-128-959-31	ELECT 1000UF 20% 35V		
328		G2N	CAPACITOR		C6445	1-107-823-11	CERAMIC CHIP 0.47UF 10.00% 16V		
329		G2N	CAPACITOR		C6447	1-107-888-11	ELECT 47UF 20% 25V		
330		G2N	CAPACITOR		C6448	1-128-528-11	ELECT 470UF 20% 25V		
331		G2N	CAPACITOR		C6452	1-135-960-91	CERAMIC CHIP 10UF 10% 25V		
332		G2N	CAPACITOR		C6453	1-128-951-31	ELECT 2200UF 20% 16V		
333		G2N	CAPACITOR		C6464	1-107-888-11	ELECT 47UF 20% 25V		
334		G2N	CAPACITOR		C6465	1-107-906-11	ELECT 10UF 20% 50V		
335		G2N	CAPACITOR		C6501	1-117-227-11	MYLAR 1UF 10% 450V		
336		G2N	CAPACITOR		C6502	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
337		G2N	CAPACITOR		C6503	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
338		G2N	CAPACITOR		C6504	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
339		G2N	CAPACITOR		C6505	1-107-906-11	ELECT 10UF 20% 50V		
340		G2N	CAPACITOR		C6506	1-107-909-11	ELECT 47UF 20% 50V		
341		G2N	CAPACITOR		C6507	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
342		G2N	CAPACITOR		C6508	1-100-831-91	CERAMIC CHIP 0.001UF 2% 50V		
343		G2N	CAPACITOR		C6510	1-107-906-11	ELECT 10UF 20% 50V		
344		G2N	CAPACITOR		C6511	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
345		G2N	CAPACITOR		C6512	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V		
346		G2N	CAPACITOR		C6513	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V		
347		G2N	CAPACITOR		C6515	1-107-888-11	ELECT 47UF 20% 25V		
348		G2N	CAPACITOR		C6516	1-107-824-11	CERAMIC 220PF 5.00% 1KV		
349		G2N	CAPACITOR		C6517	1-107-824-11	CERAMIC 220PF 5.00% 1KV		
350		G2N	CAPACITOR		C6518	1-100-400-11	FILM 39000PF 3% 1KV		
351		G2N	CAPACITOR		C6601	1-165-774-31	ELECT 470UF 20% 100V		
352		G2N	CAPACITOR		C6602	1-165-774-31	ELECT 470UF 20% 100V		
353		G2N	CAPACITOR		C6603	1-100-727-21	ELECT(BLOCK) 3900UF 20% 100V		
354		G2N	CAPACITOR		C6604	1-102-244-00	CERAMIC 220PF 10.00% 500V		
355		G2N	CAPACITOR		C6605	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V		
356		G2N	CAPACITOR		C6606	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
357		G2N	CAPACITOR		C6607	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
358		G2N	CAPACITOR		C6608	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
359		G2N	CAPACITOR		C6701	1-117-228-71	MYLAR 2.2UF 10.00% 450V		
360		G2N	CAPACITOR		C6702	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
361		G2N	CAPACITOR		C6703	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
362		G2N	CAPACITOR		C6704	1-107-907-11	ELECT 22UF 20% 50V		
363		G2N	CAPACITOR		C6706	1-107-909-11	ELECT 47UF 20% 50V		
364		G2N	CAPACITOR		C6707	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
365		G2N	CAPACITOR		C6708	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
366		G2N	CAPACITOR		C6709	1-100-831-91	CERAMIC CHIP 0.001UF 2% 50V		
367		G2N	CAPACITOR		C6711	1-107-906-11	ELECT 10UF 20% 50V		
368		G2N	CAPACITOR		C6712	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
369		G2N	CAPACITOR		C6713	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V		
370		G2N	CAPACITOR		C6714	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
371		G2N	CAPACITOR		C6716	1-107-888-11	ELECT 47UF 20% 25V		
372		G2N	CAPACITOR		C6718	1-100-613-81	CERAMIC 470PF 5% 1KV		
373		G2N	CAPACITOR		C6719	1-100-613-81	CERAMIC 470PF 5% 1KV		
374		G2N	CAPACITOR		C6720	1-100-400-11	FILM 39000PF 3% 1KV		
375		G2N	CAPACITOR		C6721	1-100-400-11	FILM 39000PF 3% 1KV		
376		G2N	CAPACITOR		C6801	1-112-023-11	ELECT(BLOCK) 1200UF 20% 250V		
377		G2N	CAPACITOR		C6803	1-112-023-11	ELECT(BLOCK) 1200UF 20% 250V		
378		G2N	CAPACITOR		C6805	1-112-023-11	ELECT(BLOCK) 1200UF 20% 250V		
379		G2N	CAPACITOR		C6807	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
380		G2N	CAPACITOR		C6808	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
381		G2N	CAPACITOR		C6809	1-102-244-00	CERAMIC 220PF 10.00% 500V		
382		G2N	CAPACITOR		C6810	1-163-017-00	CERAMIC CHIP 0.0047UF 10.00% 50V		
383		G2N	CAPACITOR		C6811	1-107-882-91	ELECT 100UF 20% 16V		
384		G2N	CAPACITOR		C6820	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
385		G2N	CAPACITOR		C6901	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
386		G2N	CAPACITOR		C6902	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
387		G2N	CAPACITOR		C6903	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
388		G2N	CAPACITOR		C6904	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
389		G2N	CAPACITOR		C6905	1-107-906-11	ELECT 10UF 20% 50V		
390		G2N	CAPACITOR		C6906	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
391		G2N	CAPACITOR		C6907	1-165-908-11	CERAMIC CHIP 1UF 10% 10V		
392		G2N	CAPACITOR		C6908	1-107-905-11	ELECT 4.7UF 20% 50V		
393		G2N	CAPACITOR		C6911	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
394		G2N	CAPACITOR		C6918	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
395		G2N	CAPACITOR		C6921	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
396		G2N	CAPACITOR		C6929	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
397		G2N	CAPACITOR		C6930	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
398		G2N	CAPACITOR		C6931	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
399		G2N	CAPACITOR		C6932	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
400		G2N	CAPACITOR		C6933	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
401		G2N	CAPACITOR		C6934	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
402		G2N	CAPACITOR		C6935	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
403		G2N	CAPACITOR		C6936	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
404		G2N	CAPACITOR		C6937	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
405		G2N	CAPACITOR		C6938	1-128-528-11	ELECT 470UF 20% 25V		
406		G2N	CAPACITOR		C6939	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
407		G2N	CAPACITOR		C6940	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
408		G2N	CAPACITOR		C6941	1-165-908-11	CERAMIC CHIP 1UF 10% 10V		
409		G2N	CAPACITOR		C6942	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
410		G2N	CONNECTOR		CN6004	1-817-097-91	PIN, CONNECTOR (1.5MM)(SMD)13P		
411		G2N	CONNECTOR	*	CN6005	1-766-175-11	PIN, CONNECTOR (PC BOARD) 5P		
412		G2N	CONNECTOR		CN6006	1-766-383-91	PIN, CONNECTOR 12P		
413		G2N	CONNECTOR	*	CN6008	1-770-468-21	PIN, CONNECTOR (PC BOARD) 10P		
414		G2N	CONNECTOR		CN6009	1-785-728-21	PIN (PC BOARD), CONNECTOR 7P		
415		G2N	CONNECTOR		CN6013	1-779-092-11	PIN, CONNECTOR (PC BOARD) 10P		
416		G2N	CONNECTOR	*	CN6020	1-580-838-11	PIN, CONNECTOR (PC BOARD) 4P		
417		G2N	CONNECTOR		CN6021	1-766-376-91	PIN, CONNECTOR 9P		
418		G2N	CONNECTOR		CN6022	1-691-550-91	PIN, CONNECTOR 3P		
419		G2N	CONNECTOR		CN6301	1-573-806-91	PIN, CONNECTOR 6P		
420		G2N	DIODE		D6301	8-719-081-97	DIODE MMDL914T1		
421		G2N	DIODE		D6302	8-719-082-03	DIODE MM3Z15VT1		
422		G2N	DIODE		D6303	8-719-082-03	DIODE MM3Z15VT1		
423		G2N	DIODE		D6304	8-719-082-03	DIODE MM3Z15VT1		
424		G2N	DIODE		D6305	8-719-979-64	DIODE UF4005/23		
425		G2N	DIODE		D6306	6-501-043-01	DIODE UMZ16NT106		
426		G2N	DIODE		D6307	6-501-043-01	DIODE UMZ16NT106		
427		G2N	DIODE		D6308	6-500-567-31	DIODE 10ERB20-TB3		
428		G2N	DIODE		D6310	8-719-081-97	DIODE MMDL914T1		
429		G2N	DIODE		D6311	8-719-080-69	DIODE M1FS4-4063		
430		G2N	DIODE		D6313	6-500-137-01	DIODE BAT54HT1		
431		G2N	DIODE		D6314	8-719-080-69	DIODE M1FS4-4063		
432		G2N	DIODE		D6401	8-719-510-12	DIODE D10SC4M		
433		G2N	DIODE		D6402	8-719-041-97	DIODE MA113-(TX)		
434		G2N	DIODE		D6403	8-719-027-22	DIODE D3S6M-F		
435		G2N	DIODE		D6404	6-500-567-31	DIODE 10ERB20-TB3		
436		G2N	DIODE		D6405	6-500-567-31	DIODE 10ERB20-TB3		
437		G2N	DIODE		D6406	8-719-510-12	DIODE D10SC4M		
438		G2N	DIODE		D6407	8-719-510-12	DIODE D10SC4M		
439		G2N	DIODE		D6408	8-719-510-12	DIODE D10SC4M		
440		G2N	DIODE		D6409	8-719-983-37	DIODE MTZJ-T-77-36A		
441		G2N	DIODE		D6411	8-719-081-97	DIODE MMDL914T1		
442		G2N	DIODE		D6412	8-719-073-69	DIODE PTZ-TE25-6.2A		
443		G2N	DIODE		D6413	8-719-081-97	DIODE MMDL914T1		
444		G2N	DIODE		D6414	8-719-081-97	DIODE MMDL914T1		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
445		G2N	DIODE		D6415	8-719-081-97	DIODE MMDL914T1		
446		G2N	DIODE		D6416	8-719-081-97	DIODE MMDL914T1		
447		G2N	DIODE		D6417	8-719-510-13	DIODE D10SC4MR		
448		G2N	DIODE		D6420	8-719-081-97	DIODE MMDL914T1		
449		G2N	DIODE		D6421	8-719-081-97	DIODE MMDL914T1		
450		G2N	DIODE		D6422	8-719-081-97	DIODE MMDL914T1		
451		G2N	DIODE		D6423	8-719-081-97	DIODE MMDL914T1		
452		G2N	DIODE		D6425	8-719-081-97	DIODE MMDL914T1		
453		G2N	DIODE		D6501	8-719-081-97	DIODE MMDL914T1		
454		G2N	DIODE		D6502	8-719-082-03	DIODE MM3Z15VT1		
455		G2N	DIODE		D6503	8-719-082-03	DIODE MM3Z15VT1		
456		G2N	DIODE		D6504	8-719-082-03	DIODE MM3Z15VT1		
457		G2N	DIODE		D6505	8-719-979-64	DIODE UF4005/23		
458		G2N	DIODE		D6506	6-501-043-01	DIODE UMZ16NT106		
459		G2N	DIODE		D6507	6-501-043-01	DIODE UMZ16NT106		
460		G2N	DIODE		D6511	8-719-080-69	DIODE M1FS4-4063		
461		G2N	DIODE		D6513	6-500-137-01	DIODE BAT54HT1		
462		G2N	DIODE		D6514	8-719-080-69	DIODE M1FS4-4063		
463		G2N	DIODE		D6601	8-719-054-51	DIODE D8LC20U-4012		
464		G2N	DIODE		D6602	6-500-254-01	DIODE MM3Z7V5T1		
465		G2N	DIODE		D6603	8-719-081-97	DIODE MMDL914T1		
466		G2N	DIODE		D6700	8-719-081-97	DIODE MMDL914T1		
467		G2N	DIODE		D6701	8-719-082-03	DIODE MM3Z15VT1		
468		G2N	DIODE		D6702	8-719-082-03	DIODE MM3Z15VT1		
469		G2N	DIODE		D6703	8-719-082-03	DIODE MM3Z15VT1		
470		G2N	DIODE		D6704	8-719-979-64	DIODE UF4005/23		
471		G2N	DIODE		D6705	8-719-041-97	DIODE MA113-(TX)		
472		G2N	DIODE		D6706	8-719-041-97	DIODE MA113-(TX)		
473		G2N	DIODE		D6707	6-501-043-01	DIODE UMZ16NT106		
474		G2N	DIODE		D6708	6-501-043-01	DIODE UMZ16NT106		
475		G2N	DIODE		D6711	8-719-080-69	DIODE M1FS4-4063		
476		G2N	DIODE		D6713	6-500-137-01	DIODE BAT54HT1		
477		G2N	DIODE		D6714	8-719-080-69	DIODE M1FS4-4063		
478		G2N	DIODE		D6801	6-500-439-01	DIODE D8LD40-F1		
479		G2N	DIODE		D6802	8-719-082-03	DIODE MM3Z15VT1		
480		G2N	DIODE		D6804	6-500-439-01	DIODE D8LD40-F1		
481		G2N	DIODE		D6805	8-719-081-97	DIODE MMDL914T1		
482		G2N	DIODE		D6806	8-719-081-97	DIODE MMDL914T1		
483		G2N	DIODE		D6812	8-719-081-97	DIODE MMDL914T1		
484		G2N	DIODE		D6901	8-719-083-61	DIODE UDZSTE-1711B		
485		G2N	DIODE		D6902	8-719-081-97	DIODE MMDL914T1		
486		G2N	DIODE		D6903	8-719-081-97	DIODE MMDL914T1		
487		G2N	DIODE		D6904	8-719-081-97	DIODE MMDL914T1		
488		G2N	DIODE		D6906	8-719-081-97	DIODE MMDL914T1		
489		G2N	DIODE		D6907	8-719-041-97	DIODE MA113-(TX)		
490		G2N	DIODE		D6908	8-719-041-97	DIODE MA113-(TX)		
491		G2N	DIODE		D6912	8-719-059-50	DIODE MA3J142D0LSO		
492		G2N	DIODE		D6914	8-719-059-50	DIODE MA3J142D0LSO		
493		G2N	DIODE		D6920	8-719-081-97	DIODE MMDL914T1		
494		G2N	DIODE		D6921	8-719-059-50	DIODE MA3J142D0LSO		
495		G2N	DIODE		D6922	8-719-081-97	DIODE MMDL914T1		
496		G2N	DIODE		D6923	8-719-081-97	DIODE MMDL914T1		
497		G2N	FERRITE BEAD		FB6401	1-410-397-21	FERRITE 1.1UH		
498		G2N	FERRITE BEAD		FB6402	1-410-397-21	FERRITE 1.1UH		
499		G2N	IC		IC6301	6-706-852-01	IC CXD9841M		
500		G2N	IC		IC6401	8-759-653-07	IC PQ09RD21J00H		
501		G2N	IC		IC6402	8-759-471-81	IC PQ05RD11J00H		
502		G2N	IC		IC6403	6-704-967-01	IC PQ20RX11J00H		
503		G2N	IC		IC6404	8-759-581-11	IC NJM2125F(Te2)		
504		G2N	IC		IC6405	8-759-682-42	IC MM1431ATT		
505		G2N	IC		IC6408	6-703-249-01	IC SN105233DBTR		
506		G2N	IC		IC6409	6-704-967-01	IC PQ20RX11J00H		
507		G2N	IC		IC6501	6-706-852-01	IC CXD9841M		
508		G2N	IC		IC6601	8-759-682-42	IC MM1431ATT		
509		G2N	IC		IC6701	6-706-852-01	IC CXD9841M		
510		G2N	IC		IC6801	8-759-682-42	IC MM1431ATT		
511		G2N	IC		IC6902	8-759-682-42	IC MM1431ATT		
512		G2N	IC	*	IC6903	8-759-575-27	IC BA10339F-E2		
513		G2N	IC	*	IC6905	8-759-575-27	IC BA10339F-E2		
514		G2N	IC		IC6906	8-759-682-42	IC MM1431ATT		
515		G2N	IC		IC6907	8-759-581-11	IC NJM2125F(Te2)		
516		G2N	COIL		L6301	1-406-667-11	INDUCTOR 220UH		
517		G2N	COIL		L6400	1-412-537-31	INDUCTOR 100UH		
518		G2N	COIL		L6401	1-406-657-11	INDUCTOR 4.7UH		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
519		G2N	COIL		L6402	1-406-657-11	INDUCTOR 4.7UH		
520		G2N	COIL		L6403	1-412-537-31	INDUCTOR 100UH		
521		G2N	COIL		L6404	1-406-657-11	INDUCTOR 4.7UH		
522		G2N	COIL		L6405	1-456-787-21	INDUCTOR 10UH		
523		G2N	COIL		L6501	1-406-665-11	INDUCTOR 100UH		
524		G2N	COIL		L6701	1-406-977-21	INDUCTOR 100UH		
525		G2N	COIL		L6800	1-406-656-21	INDUCTOR 3.3UH		
526		G2N	PHOTO COUPLER	△	PH6401	6-600-187-01	PHOTO COUPLER PC123Y22JOOF		
527		G2N	PHOTO COUPLER	△	PH6601	6-600-187-01	PHOTO COUPLER PC123Y22JOOF		
528		G2N	PHOTO COUPLER	△	PH6801	6-600-187-01	PHOTO COUPLER PC123Y22JOOF		
529		G2N	PHOTO COUPLER	△	PH6902	6-600-187-01	PHOTO COUPLER PC123Y22JOOF		
530		G2N	PHOTO COUPLER	△	PH6903	6-600-187-01	PHOTO COUPLER PC123Y22JOOF		
531		G2N	PHOTO COUPLER	△	PH6905	6-600-187-01	PHOTO COUPLER PC123Y22JOOF		
532		G2N	TRANSISTOR		Q6301	6-550-526-11	TRANSISTOR 2SK2842(LBS2SONY)		
533		G2N	TRANSISTOR		Q6302	6-550-526-11	TRANSISTOR 2SK2842(LBS2SONY)		
534		G2N	TRANSISTOR		Q6405	8-729-140-96	TRANSISTOR 2SD774-34		
535		G2N	TRANSISTOR		Q6406	6-550-222-01	TRANSISTOR IRF7335D1-TR		
536		G2N	TRANSISTOR		Q6407	8-729-907-00	TRANSISTOR DTC114EU		
537		G2N	TRANSISTOR		Q6408	8-729-907-00	TRANSISTOR DTC114EU		
538		G2N	TRANSISTOR		Q6413	8-729-907-00	TRANSISTOR DTC114EU		
539		G2N	TRANSISTOR		Q6414	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		
540		G2N	TRANSISTOR		Q6415	8-729-905-35	TRANSISTOR 2SC4081-R		
541		G2N	TRANSISTOR		Q6416	8-729-028-91	TRANSISTOR DTA114EUA-T106		
542		G2N	TRANSISTOR		Q6417	8-729-029-14	TRANSISTOR DTC114EUA-T106		
543		G2N	TRANSISTOR		Q6418	8-729-905-35	TRANSISTOR 2SC4081-R		
544		G2N	TRANSISTOR		Q6419	8-729-046-75	TRANSISTOR SI2301DS-T1		
545		G2N	TRANSISTOR		Q6502	8-729-907-00	TRANSISTOR DTC114EU		
546		G2N	TRANSISTOR		Q6503	6-550-526-11	TRANSISTOR 2SK2842(LBS2SONY)		
547		G2N	TRANSISTOR		Q6504	6-550-526-11	TRANSISTOR 2SK2842(LBS2SONY)		
548		G2N	TRANSISTOR		Q6600	6-550-118-01	TRANSISTOR IRLI3215-LF33		
549		G2N	TRANSISTOR		Q6601	8-729-907-00	TRANSISTOR DTC114EU		
550		G2N	TRANSISTOR		Q6702	8-729-907-00	TRANSISTOR DTC114EU		
551		G2N	TRANSISTOR		Q6703	8-729-820-86	TRANSISTOR 2SB1121-ST		
552		G2N	TRANSISTOR		Q6704	8-729-820-86	TRANSISTOR 2SB1121-ST		
553		G2N	TRANSISTOR		Q6705	6-550-372-01	TRANSISTOR SPA20N60C3E8152		
554		G2N	TRANSISTOR		Q6706	6-550-372-01	TRANSISTOR SPA20N60C3E8152		
555		G2N	TRANSISTOR		Q6801	6-550-715-01	TRANSISTOR IRFS644BYDTU		
556		G2N	TRANSISTOR		Q6802	8-729-907-00	TRANSISTOR DTC114EU		
557		G2N	TRANSISTOR		Q6901	8-729-905-35	TRANSISTOR 2SC4081-R		
558		G2N	TRANSISTOR		Q6902	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		
559		G2N	TRANSISTOR		Q6903	8-729-028-73	TRANSISTOR DTA114EUA-T106		
560		G2N	TRANSISTOR		Q6905	8-729-028-73	TRANSISTOR DTA114EUA-T106		
561		G2N	TRANSISTOR		Q6906	8-729-028-73	TRANSISTOR DTA114EUA-T106		
562		G2N	TRANSISTOR		Q6909	8-729-028-73	TRANSISTOR DTA114EUA-T106		
563		G2N	TRANSISTOR		Q6910	8-729-905-35	TRANSISTOR 2SC4081-R		
564		G2N	TRANSISTOR		Q6911	8-729-028-73	TRANSISTOR DTA114EUA-T106		
565		G2N	TRANSISTOR		Q6912	8-729-907-00	TRANSISTOR DTC114EU		
566		G2N	TRANSISTOR		Q6913	8-729-907-00	TRANSISTOR DTC114EU		
567		G2N	TRANSISTOR		Q6915	8-729-028-73	TRANSISTOR DTA114EUA-T106		
568		G2N	TRANSISTOR		Q6918	8-729-028-73	TRANSISTOR DTA114EUA-T106		
569		G2N	TRANSISTOR		Q6919	8-729-907-00	TRANSISTOR DTC114EU		
570		G2N	TRANSISTOR		Q6922	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		
571		G2N	TRANSISTOR		Q6923	8-729-028-73	TRANSISTOR DTA114EUA-T106		
572		G2N	TRANSISTOR		Q6924	8-729-023-22	TRANSISTOR 2SD2114K		
573		G2N	TRANSISTOR		Q6925	8-729-023-22	TRANSISTOR 2SD2114K		
574		G2N	TRANSISTOR		Q6926	8-729-907-00	TRANSISTOR DTC114EU		
575		G2N	RESISTOR		R6301	1-249-393-11	CARBON 10 5% 1/4W		
576		G2N	RESISTOR		R6302	1-202-933-61	FUSIBLE 0.1 10% 1/2W		
577		G2N	RESISTOR		R6303	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
578		G2N	RESISTOR		R6304	1-249-393-11	CARBON 10 5% 1/4W		
579		G2N	RESISTOR		R6305	1-245-478-21	METAL 470K 1% 1/4W		
580		G2N	RESISTOR		R6306	1-245-478-21	METAL 470K 1% 1/4W		
581		G2N	RESISTOR		R6307	1-218-877-11	METAL CHIP 18K 0.5% 1/10W		
582		G2N	RESISTOR		R6308	1-216-821-11	METAL CHIP 1K 5% 1/10W		
583		G2N	RESISTOR		R6309	1-218-823-11	METAL CHIP 100 0.5% 1/10W		
584		G2N	RESISTOR		R6311	1-249-397-11	CARBON 22 5% 1/4W		
585		G2N	RESISTOR		R6312	1-249-397-11	CARBON 22 5% 1/4W		
586		G2N	RESISTOR		R6313	1-218-827-11	METAL CHIP 150 0.5% 1/10W		
587		G2N	RESISTOR		R6314	1-216-833-11	METAL CHIP 10K 5% 1/10W		
588		G2N	RESISTOR		R6315	1-216-833-11	METAL CHIP 10K 5% 1/10W		
589		G2N	RESISTOR		R6316	1-260-304-51	CARBON 10 5% 1/2W		
590		G2N	RESISTOR		R6318	1-216-361-00	METAL OXIDE 0.22 5% 2W		
591		G2N	RESISTOR		R6320	1-216-864-11	SHORT CHIP 0		
592		G2N	RESISTOR		R6401	1-249-377-11	CARBON 0.47 5% 1/4W		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
593		G2N	RESISTOR		R6402	1-216-821-11	METAL CHIP 1K 5% 1/10W		
594		G2N	RESISTOR		R6404	1-216-821-11	METAL CHIP 1K 5% 1/10W		
595		G2N	RESISTOR		R6405	1-249-393-11	CARBON 10 5% 1/4W		
596		G2N	RESISTOR		R6406	1-216-793-11	METAL CHIP 4.7 5% 1/10W		
597		G2N	RESISTOR		R6407	1-216-821-11	METAL CHIP 1K 5% 1/10W		
598		G2N	RESISTOR		R6408	1-216-833-11	METAL CHIP 10K 5% 1/10W		
599		G2N	RESISTOR		R6409	1-216-833-11	METAL CHIP 10K 5% 1/10W		
600		G2N	RESISTOR		R6411	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W		
601		G2N	RESISTOR		R6412	1-218-875-11	METAL CHIP 15K 0.5% 1/10W		
602		G2N	RESISTOR		R6413	1-216-864-11	SHORT CHIP 0		
603		G2N	RESISTOR		R6414	1-216-841-11	METAL CHIP 47K 5% 1/10W		
604		G2N	RESISTOR		R6415	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
605		G2N	RESISTOR		R6418	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
606		G2N	RESISTOR		R6419	1-216-841-11	METAL CHIP 47K 5% 1/10W		
607		G2N	RESISTOR		R6420	1-218-857-11	METAL CHIP 2.7K 0.5% 1/10W		
608		G2N	RESISTOR		R6421	1-218-861-11	METAL CHIP 3.9K 0.5% 1/10W		
609		G2N	RESISTOR		R6422	1-218-835-11	METAL CHIP 330 0.5% 1/10W		
610		G2N	RESISTOR		R6423	1-216-833-11	METAL CHIP 10K 5% 1/10W		
611		G2N	RESISTOR		R6424	1-218-887-11	METAL CHIP 47K 0.5% 1/10W		
612		G2N	RESISTOR		R6425	1-216-864-11	SHORT CHIP 0		
613		G2N	RESISTOR		R6426	1-218-887-11	METAL CHIP 47K 0.5% 1/10W		
614		G2N	RESISTOR		R6428	1-216-799-11	METAL CHIP 15 5% 1/10W		
615		G2N	RESISTOR		R6434	1-216-833-11	METAL CHIP 10K 5% 1/10W		
616		G2N	RESISTOR		R6436	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
617		G2N	RESISTOR		R6437	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
618		G2N	RESISTOR		R6438	1-218-853-11	METAL CHIP 1.8K 0.5% 1/10W		
619		G2N	RESISTOR		R6439	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W		
620		G2N	RESISTOR		R6441	1-216-295-91	SHORT CHIP 0		
621		G2N	RESISTOR		R6442	1-216-295-91	SHORT CHIP 0		
622		G2N	RESISTOR		R6445	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
623		G2N	RESISTOR		R6447	1-216-835-11	METAL CHIP 15K 5% 1/10W		
624		G2N	RESISTOR		R6448	1-216-835-11	METAL CHIP 15K 5% 1/10W		
625		G2N	RESISTOR		R6449	1-216-835-11	METAL CHIP 15K 5% 1/10W		
626		G2N	RESISTOR		R6450	1-216-835-11	METAL CHIP 15K 5% 1/10W		
627		G2N	RESISTOR		R6452	1-216-295-91	SHORT CHIP 0		
628		G2N	RESISTOR		R6453	1-216-295-91	SHORT CHIP 0		
629		G2N	RESISTOR		R6455	1-216-833-11	METAL CHIP 10K 5% 1/10W		
630		G2N	RESISTOR		R6457	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
631		G2N	RESISTOR		R6458	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
632		G2N	RESISTOR		R6469	1-216-833-11	METAL CHIP 10K 5% 1/10W		
633		G2N	RESISTOR		R6470	1-216-864-11	SHORT CHIP 0		
634		G2N	RESISTOR		R6471	1-218-859-11	METAL CHIP 3.3K 0.5% 1/10W		
635		G2N	RESISTOR		R6472	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W		
636		G2N	RESISTOR		R6473	1-218-869-11	METAL CHIP 8.2K 0.5% 1/10W		
637		G2N	RESISTOR		R6481	1-216-835-11	METAL CHIP 15K 5% 1/10W		
638		G2N	RESISTOR		R6482	1-216-835-11	METAL CHIP 15K 5% 1/10W		
639		G2N	RESISTOR		R6483	1-216-836-11	METAL CHIP 18K 5% 1/10W		
640		G2N	RESISTOR		R6484	1-216-835-11	METAL CHIP 15K 5% 1/10W		
641		G2N	RESISTOR		R6488	1-218-891-11	METAL CHIP 68K 0.5% 1/10W		
642		G2N	RESISTOR		R6489	1-216-841-11	METAL CHIP 47K 5% 1/10W		
643		G2N	RESISTOR		R6490	1-216-841-11	METAL CHIP 47K 5% 1/10W		
644		G2N	RESISTOR		R6491	1-216-841-11	METAL CHIP 47K 5% 1/10W		
645		G2N	RESISTOR		R6492	1-216-821-11	METAL CHIP 1K 5% 1/10W		
646		G2N	RESISTOR		R6493	1-216-845-11	METAL CHIP 100K 5% 1/10W		
647		G2N	RESISTOR		R6494	1-216-841-11	METAL CHIP 47K 5% 1/10W		
648		G2N	RESISTOR		R6501	1-216-837-11	METAL CHIP 22K 5% 1/10W		
649		G2N	RESISTOR		R6502	1-249-393-11	CARBON 10 5% 1/4W		
650		G2N	RESISTOR		R6503	1-202-933-61	FUSIBLE 0.1 10% 1/2W		
651		G2N	RESISTOR		R6504	1-216-833-11	METAL CHIP 10K 5% 1/10W		
652		G2N	RESISTOR		R6505	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W		
653		G2N	RESISTOR		R6506	1-245-478-21	METAL 470K 1% 1/4W		
654		G2N	RESISTOR		R6507	1-245-478-21	METAL 470K 1% 1/4W		
655		G2N	RESISTOR		R6509	1-218-823-11	METAL CHIP 100 0.5% 1/10W		
656		G2N	RESISTOR		R6510	1-218-875-11	METAL CHIP 15K 0.5% 1/10W		
657		G2N	RESISTOR		R6512	1-218-823-11	METAL CHIP 100 0.5% 1/10W		
658		G2N	RESISTOR		R6513	1-249-397-11	CARBON 22 5% 1/4W		
659		G2N	RESISTOR		R6514	1-249-397-11	CARBON 22 5% 1/4W		
660		G2N	RESISTOR		R6515	1-216-833-11	METAL CHIP 10K 5% 1/10W		
661		G2N	RESISTOR		R6516	1-216-833-11	METAL CHIP 10K 5% 1/10W		
662		G2N	RESISTOR		R6517	1-245-478-21	METAL 470K 1% 1/4W		
663		G2N	RESISTOR		R6518	1-245-478-21	METAL 470K 1% 1/4W		
664		G2N	RESISTOR		R6519	1-245-478-21	METAL 470K 1% 1/4W		
665		G2N	RESISTOR		R6520	1-245-478-21	METAL 470K 1% 1/4W		
666		G2N	RESISTOR		R6521	1-219-984-51	METAL 0.1 2% 2W		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
667		G2N	RESISTOR		R6522	1-216-821-11	METAL CHIP 1K 5% 1/10W		
668		G2N	RESISTOR		R6523	1-216-121-11	RES-CHIP 1M 5% 1/10W		
669		G2N	RESISTOR		R6524	1-216-864-11	SHORT CHIP 0		
670		G2N	RESISTOR		R6601	1-216-821-11	METAL CHIP 1K 5% 1/10W		
671		G2N	RESISTOR		R6602	1-216-864-11	SHORT CHIP 0		
672		G2N	RESISTOR		R6603	1-217-156-00	METAL 0.22 10% 5W		
673		G2N	RESISTOR		R6604	1-202-962-11	CEMENTED 3.3 5% 10W		
674		G2N	RESISTOR		R6605	1-216-821-11	METAL CHIP 1K 5% 1/10W		
675		G2N	RESISTOR		R6606	1-216-833-11	METAL CHIP 10K 5% 1/10W		
676		G2N	RESISTOR		R6607	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
677		G2N	RESISTOR		R6608	1-208-830-11	METAL CHIP 100K 0.5% 1/10W		
678		G2N	RESISTOR		R6609	1-218-760-11	METAL CHIP 220K 0.5% 1/10W		
679		G2N	RESISTOR		R6610	1-216-841-11	METAL CHIP 47K 5% 1/10W		
680		G2N	RESISTOR		R6611	1-216-797-11	METAL CHIP 10 5% 1/10W		
681		G2N	RESISTOR		R6612	1-215-900-11	METAL OXIDE 22K 5% 2W		
682		G2N	RESISTOR		R6701	1-216-837-11	METAL CHIP 22K 5% 1/10W		
683		G2N	RESISTOR		R6702	1-249-393-11	CARBON 10 5% 1/4W		
684		G2N	RESISTOR		R6703	1-220-886-11	FUSIBLE 0.1 10% 1W		
685		G2N	RESISTOR		R6704	1-216-833-11	METAL CHIP 10K 5% 1/10W		
686		G2N	RESISTOR		R6705	1-218-823-11	METAL CHIP 100 0.5% 1/10W		
687		G2N	RESISTOR		R6706	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W		
688		G2N	RESISTOR		R6708	1-245-478-21	METAL 470K 1% 1/4W		
689		G2N	RESISTOR		R6709	1-245-478-21	METAL 470K 1% 1/4W		
690		G2N	RESISTOR		R6710	1-218-875-11	METAL CHIP 15K 0.5% 1/10W		
691		G2N	RESISTOR		R6711	1-218-895-11	METAL CHIP 100K 0.5% 1/10W		
692		G2N	RESISTOR		R6712	1-218-825-11	METAL CHIP 120 0.5% 1/10W		
693		G2N	RESISTOR		R6713	1-249-397-11	CARBON 22 5% 1/4W		
694		G2N	RESISTOR		R6714	1-249-397-11	CARBON 22 5% 1/4W		
695		G2N	RESISTOR		R6715	1-216-833-11	METAL CHIP 10K 5% 1/10W		
696		G2N	RESISTOR		R6716	1-216-833-11	METAL CHIP 10K 5% 1/10W		
697		G2N	RESISTOR		R6717	1-216-121-11	RES-CHIP 1M 5% 1/10W		
698		G2N	RESISTOR		R6718	1-219-984-51	METAL 0.1 2% 2W		
699		G2N	RESISTOR		R6719	1-216-864-11	SHORT CHIP 0		
700		G2N	RESISTOR		R6720	1-216-821-11	METAL CHIP 1K 5% 1/10W		
701		G2N	RESISTOR		R6723	1-208-834-11	METAL CHIP 150K 0.5% 1/10W		
702		G2N	RESISTOR		R6724	1-208-834-11	METAL CHIP 150K 0.5% 1/10W		
703		G2N	RESISTOR		R6725	1-208-834-11	METAL CHIP 150K 0.5% 1/10W		
704		G2N	RESISTOR		R6726	1-208-834-11	METAL CHIP 150K 0.5% 1/10W		
705		G2N	RESISTOR		R6727	1-208-834-11	METAL CHIP 150K 0.5% 1/10W		
706		G2N	RESISTOR		R6728	1-208-834-11	METAL CHIP 150K 0.5% 1/10W		
707		G2N	RESISTOR		R6729	1-208-834-11	METAL CHIP 150K 0.5% 1/10W		
708		G2N	RESISTOR		R6730	1-208-834-11	METAL CHIP 150K 0.5% 1/10W		
709		G2N	RESISTOR		R6731	1-208-834-11	METAL CHIP 150K 0.5% 1/10W		
710		G2N	RESISTOR		R6732	1-208-834-11	METAL CHIP 150K 0.5% 1/10W		
711		G2N	RESISTOR		R6733	1-208-834-11	METAL CHIP 150K 0.5% 1/10W		
712		G2N	RESISTOR		R6734	1-208-834-11	METAL CHIP 150K 0.5% 1/10W		
713		G2N	RESISTOR		R6801	1-216-821-11	METAL CHIP 1K 5% 1/10W		
714		G2N	RESISTOR		R6802	1-220-820-31	CEMENTED 1.5 5% 10W		
715		G2N	RESISTOR		R6803	1-220-820-31	CEMENTED 1.5 5% 10W		
716		G2N	RESISTOR		R6804	1-245-703-11	METAL 22 10% 20W		
717		G2N	RESISTOR		R6812	1-243-725-71	METAL OXIDE 100K 5% 1W		
718		G2N	RESISTOR		R6813	1-243-725-71	METAL OXIDE 100K 5% 1W		
719		G2N	RESISTOR		R6814	1-216-797-11	METAL CHIP 10 5% 1/10W		
720		G2N	RESISTOR		R6815	1-208-842-11	METAL CHIP 330K 0.5% 1/10W		
721		G2N	RESISTOR		R6816	1-216-821-11	METAL CHIP 1K 5% 1/10W		
722		G2N	RESISTOR		R6817	1-216-849-11	METAL CHIP 220K 5% 1/10W		
723		G2N	RESISTOR		R6818	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
724		G2N	RESISTOR		R6819	1-208-842-11	METAL CHIP 330K 0.5% 1/10W		
725		G2N	RESISTOR		R6820	1-208-842-11	METAL CHIP 330K 0.5% 1/10W		
726		G2N	RESISTOR		R6821	1-216-821-11	METAL CHIP 1K 5% 1/10W		
727		G2N	RESISTOR		R6838	1-216-833-11	METAL CHIP 10K 5% 1/10W		
728		G2N	RESISTOR		R6839	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W		
729		G2N	RESISTOR		R6840	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
730		G2N	RESISTOR		R6841	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
731		G2N	RESISTOR		R6842	1-218-875-11	METAL CHIP 15K 0.5% 1/10W		
732		G2N	RESISTOR		R6844	1-216-833-11	METAL CHIP 10K 5% 1/10W		
733		G2N	RESISTOR		R6846	1-216-836-11	METAL CHIP 18K 5% 1/10W		
734		G2N	RESISTOR		R6901	1-208-834-11	METAL CHIP 150K 0.5% 1/10W		
735		G2N	RESISTOR		R6902	1-216-833-11	METAL CHIP 10K 5% 1/10W		
736		G2N	RESISTOR		R6903	1-216-864-11	SHORT CHIP 0		
737		G2N	RESISTOR		R6905	1-208-834-11	METAL CHIP 150K 0.5% 1/10W		
738		G2N	RESISTOR		R6906	1-216-833-11	METAL CHIP 10K 5% 1/10W		
739		G2N	RESISTOR		R6907	1-216-833-11	METAL CHIP 10K 5% 1/10W		
740		G2N	RESISTOR		R6908	1-216-833-11	METAL CHIP 10K 5% 1/10W		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
741		G2N	RESISTOR		R6909	1-216-821-11	METAL CHIP 1K 5% 1/10W		
742		G2N	RESISTOR		R6910	1-216-809-11	METAL CHIP 100 5% 1/10W		
743		G2N	RESISTOR		R6911	1-216-833-11	METAL CHIP 10K 5% 1/10W		
744		G2N	RESISTOR		R6912	1-216-841-11	METAL CHIP 47K 5% 1/10W		
745		G2N	RESISTOR		R6913	1-216-833-11	METAL CHIP 10K 5% 1/10W		
746		G2N	RESISTOR		R6914	1-216-833-11	METAL CHIP 10K 5% 1/10W		
747		G2N	RESISTOR		R6915	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
748		G2N	RESISTOR		R6916	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
749		G2N	RESISTOR		R6917	1-208-830-11	METAL CHIP 100K 0.5% 1/10W		
750		G2N	RESISTOR		R6918	1-208-830-11	METAL CHIP 100K 0.5% 1/10W		
751		G2N	RESISTOR		R6919	1-218-879-11	METAL CHIP 22K 0.5% 1/10W		
752		G2N	RESISTOR		R6920	1-216-821-11	METAL CHIP 1K 5% 1/10W		
753		G2N	RESISTOR		R6921	1-216-833-11	METAL CHIP 10K 5% 1/10W		
754		G2N	RESISTOR		R6932	1-208-834-11	METAL CHIP 150K 0.5% 1/10W		
755		G2N	RESISTOR		R6933	1-218-899-11	METAL CHIP 150K 0.5% 1/16W		
756		G2N	RESISTOR		R6934	1-216-833-11	METAL CHIP 10K 5% 1/10W		
757		G2N	RESISTOR		R6935	1-216-833-11	METAL CHIP 10K 5% 1/10W		
758		G2N	RESISTOR		R6936	1-216-833-11	METAL CHIP 10K 5% 1/10W		
759		G2N	RESISTOR		R6937	1-216-833-11	METAL CHIP 10K 5% 1/10W		
760		G2N	RESISTOR		R6938	1-216-833-11	METAL CHIP 10K 5% 1/10W		
761		G2N	RESISTOR		R6939	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
762		G2N	RESISTOR		R6940	1-216-833-11	METAL CHIP 10K 5% 1/10W		
763		G2N	RESISTOR		R6941	1-216-833-11	METAL CHIP 10K 5% 1/10W		
764		G2N	RESISTOR		R6944	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
765		G2N	RESISTOR		R6945	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
766		G2N	RESISTOR		R6946	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
767		G2N	RESISTOR		R6947	1-218-875-11	METAL CHIP 15K 0.5% 1/10W		
768		G2N	RESISTOR		R6951	1-216-821-11	METAL CHIP 1K 5% 1/10W		
769		G2N	RESISTOR		R6955	1-216-833-11	METAL CHIP 10K 5% 1/10W		
770		G2N	RESISTOR		R6956	1-216-821-11	METAL CHIP 1K 5% 1/10W		
771		G2N	RESISTOR		R6957	1-216-821-11	METAL CHIP 1K 5% 1/10W		
772		G2N	RESISTOR		R6966	1-216-821-11	METAL CHIP 1K 5% 1/10W		
773		G2N	RESISTOR		R6967	1-216-821-11	METAL CHIP 1K 5% 1/10W		
774		G2N	RESISTOR		R6968	1-218-895-11	METAL CHIP 100K 0.5% 1/10W		
775		G2N	RESISTOR		R6969	1-216-833-11	METAL CHIP 10K 5% 1/10W		
776		G2N	RESISTOR		R6970	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
777		G2N	RESISTOR		R6971	1-208-826-11	METAL CHIP 68K 0.5% 1/10W		
778		G2N	RESISTOR		R6972	1-208-826-11	METAL CHIP 68K 0.5% 1/10W		
779		G2N	RESISTOR		R6973	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
780		G2N	RESISTOR		R6974	1-208-822-11	METAL CHIP 47K 0.5% 1/10W		
781		G2N	RESISTOR		R6975	1-208-834-11	METAL CHIP 150K 0.5% 1/10W		
782		G2N	RESISTOR		R6976	1-208-834-11	METAL CHIP 150K 0.5% 1/10W		
783		G2N	RESISTOR		R6978	1-218-911-11	METAL CHIP 470K 0.5% 1/10W		
784		G2N	RESISTOR		R6979	1-218-911-11	METAL CHIP 470K 0.5% 1/10W		
785		G2N	RESISTOR		R6985	1-218-875-11	METAL CHIP 15K 0.5% 1/10W		
786		G2N	RESISTOR		R6986	1-208-834-11	METAL CHIP 150K 0.5% 1/10W		
787		G2N	RESISTOR		R6987	1-208-834-11	METAL CHIP 150K 0.5% 1/10W		
788		G2N	RESISTOR		R6988	1-208-834-11	METAL CHIP 150K 0.5% 1/10W		
789		G2N	RESISTOR		R6989	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
790		G2N	RESISTOR		R6990	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
791		G2N	RESISTOR		R6991	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
792		G2N	RESISTOR		R6992	1-216-833-11	METAL CHIP 10K 5% 1/10W		
793		G2N	RESISTOR		R6993	1-216-833-11	METAL CHIP 10K 5% 1/10W		
794		G2N	RESISTOR		R6994	1-216-833-11	METAL CHIP 10K 5% 1/10W		
795		G2N	RESISTOR		R6995	1-216-833-11	METAL CHIP 10K 5% 1/10W		
796		G2N	RESISTOR		R6996	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
797		G2N	RESISTOR		R6997	1-208-834-11	METAL CHIP 150K 0.5% 1/10W		
798		G2N	RESISTOR		R6998	1-208-834-11	METAL CHIP 150K 0.5% 1/10W		
799		G2N	RESISTOR		R6999	1-208-832-11	METAL CHIP 120K 0.5% 1/10W		
800		G2N	VARIABLE RESISTOR		RV6601	1-241-768-11	RES, ADJ, CARBON 220K		
801		G2N	VARIABLE RESISTOR		RV6801	1-223-387-21	RES, ADJ, CARBON 330K		
802		G2N	TRANSFORMER	△	T6301	1-443-450-11	DC-DC CONVERTER TRANSFORMER		
803		G2N	TRANSFORMER	△	T6501	1-443-449-21	CONVERTER TRANSFORMER (PIT)		
804		G2N	TRANSFORMER	△	T6701	1-443-448-21	CONVERTER TRANSFORMER (PIT)		
805		G2N	TRANSFORMER	△	T6702	1-443-448-21	CONVERTER TRANSFORMER (PIT)		
806		G2N	THERMISTOR		TH6403	1-804-045-11	THERMISTOR		
807		G2N	THERMISTOR		TH6901	1-804-045-11	THERMISTOR		
808		QH	CAPACITOR		C7203	1-162-910-11	CERAMIC CHIP 5PF 0.25PF 50V		
809		QH	CAPACITOR		C7204	1-162-911-11	CERAMIC CHIP 6PF 0.50PF 50V		
810		QH	CAPACITOR		C7205	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
811		QH	CAPACITOR		C7206	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
812		QH	CAPACITOR		C7207	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
813		QH	CAPACITOR		C7208	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
814		QH	CAPACITOR		C7209	1-165-908-11	CERAMIC CHIP 1UF 10% 10V		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
815		QH	CAPACITOR		C7210	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
816		QH	CAPACITOR		C7211	1-127-760-11	CERAMIC CHIP 4.7UF 10% 6.3V		
817		QH	CAPACITOR		C7212	1-165-908-11	CERAMIC CHIP 1UF 10% 10V		
818		QH	CAPACITOR		C7213	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
819		QH	CAPACITOR		C7215	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
820		QH	CAPACITOR		C7216	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
821		QH	CAPACITOR		C7217	1-165-908-11	CERAMIC CHIP 1UF 10% 10V		
822		QH	CAPACITOR		C7218	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
823		QH	CAPACITOR		C7219	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
824		QH	CAPACITOR		C7220	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
825		QH	CAPACITOR		C7221	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
826		QH	CAPACITOR		C7224	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
827		QH	CAPACITOR		C7225	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
828		QH	CONNECTOR	*	CN7201	1-573-768-21	PIN, CONNECTOR (1.5MM) (SMD)5P		
829		QH	CONNECTOR		CN7204	1-817-653-11	MEMORY STICK CONNECTOR		
830		QH	CONNECTOR	*	CN7207	1-785-125-21	CONNECTOR 6P		
831		QH	DIODE		D7202	8-719-083-58	DIODE UDZSTE-173.9B		
832		QH	DIODE		D7203	8-719-081-97	DIODE MMDL914T1		
833		QH	DIODE		D7210	6-500-182-01	DIODE L-1503CB/1ID-F01		
834		QH	DIODE		D7212	8-719-083-58	DIODE UDZSTE-173.9B		
835		QH	FERRITE BEAD		FB7201	1-414-921-11	FERRITE 0UH		
836		QH	FERRITE BEAD		FB7202	1-414-921-11	FERRITE 0UH		
837		QH	FERRITE BEAD		FB7203	1-414-921-11	FERRITE 0UH		
838		QH	IC		IC7201	6-703-076-01	IC XC6204B332MR		
839		QH	IC		IC7202	6-704-548-01	IC 90C36LC1B-LF		
840		QH	IC		IC7203	6-704-067-01	IC M24128-BWMN6T(A)		
841		QH	IC		IC7204	6-801-402-01	IC BD4729GTR		
842		QH	COIL		L7201	1-414-394-11	INDUCTOR 2.2UH		
843		QH	TRANSISTOR		Q7201	8-729-424-02	TRANSISTOR 2SB709A-QRS-TX		
844		QH	TRANSISTOR		Q7202	8-729-422-27	TRANSISTOR 2SD601A-Q		
845		QH	RESISTOR		R7201	1-216-864-11	SHORT CHIP 0		
846		QH	RESISTOR		R7202	1-414-228-11	FERRITE 0UH		
847		QH	RESISTOR		R7203	1-216-837-11	METAL CHIP 22K 5% 1/10W		
848		QH	RESISTOR		R7204	1-216-809-11	METAL CHIP 100 5% 1/10W		
849		QH	RESISTOR		R7205	1-216-813-11	METAL CHIP 220 5% 1/10W		
850		QH	RESISTOR		R7206	1-216-857-11	METAL CHIP 1M 5% 1/10W		
851		QH	RESISTOR		R7207	1-216-864-11	SHORT CHIP 0		
852		QH	RESISTOR		R7209	1-414-228-11	FERRITE 0UH		
853		QH	RESISTOR		R7210	1-216-803-11	METAL CHIP 33 5% 1/10W		
854		QH	RESISTOR		R7211	1-216-821-11	METAL CHIP 1K 5% 1/10W		
855		QH	RESISTOR		R7212	1-216-803-11	METAL CHIP 33 5% 1/10W		
856		QH	RESISTOR		R7213	1-216-833-11	METAL CHIP 10K 5% 1/10W		
857		QH	RESISTOR		R7214	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
858		QH	RESISTOR		R7215	1-414-228-11	FERRITE 0UH		
859		QH	RESISTOR		R7216	1-216-821-11	METAL CHIP 1K 5% 1/10W		
860		QH	RESISTOR		R7217	1-216-821-11	METAL CHIP 1K 5% 1/10W		
861		QH	RESISTOR		R7218	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
862		QH	RESISTOR		R7219	1-216-817-11	METAL CHIP 470 5% 1/10W		
863		QH	RESISTOR		R7221	1-216-821-11	METAL CHIP 1K 5% 1/10W		
864		QH	RESISTOR		R7222	1-216-811-11	METAL CHIP 150 5% 1/10W		
865		QH	RESISTOR		R7223	1-216-809-11	METAL CHIP 100 5% 1/10W		
866		QH	RESISTOR		R7224	1-216-809-11	METAL CHIP 100 5% 1/10W		
867		QH	RESISTOR		R7225	1-216-809-11	METAL CHIP 100 5% 1/10W		
868		QH	RESISTOR		R7226	1-216-864-11	SHORT CHIP 0		
869		QH	RESISTOR		R7227	1-216-864-11	SHORT CHIP 0		
870		QH	RESISTOR		R7228	1-216-864-11	SHORT CHIP 0		
871		QH	RESISTOR		R7229	1-216-821-11	METAL CHIP 1K 5% 1/10W		
872		QH	RESISTOR		R7231	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
873		QH	RESISTOR		R7232	1-216-864-11	SHORT CHIP 0		
874		QH	RESISTOR		R7235	1-216-864-11	SHORT CHIP 0		
875		QH	RESISTOR		R7236	1-216-864-11	SHORT CHIP 0		
876		QH	CRYSTAL		X7201	1-760-965-21	VIBRATOR, CRYSTAL		
877		F	CAPACITOR	△	C6002	1-165-531-11	MYLAR 1UF 10 275V		
878		F	CAPACITOR	△	C6005	1-119-886-51	CERAMIC 470PF 10.00% 250V		
879		F	CAPACITOR	△	C6006	1-119-886-51	CERAMIC 470PF 10.00% 250V		
880		F	CONNECTOR	△*	CN6001	1-580-843-11	PIN, CONNECTOR (POWER)		
881		F	CONNECTOR	△*	CN6018	1-580-843-11	PIN, CONNECTOR (POWER)		
882		F	CONNECTOR		CN6051	1-695-915-11	TAB (CONTACT)		
883		F	CONNECTOR		CN6052	1-695-915-11	TAB (CONTACT)		
884		F	FUSE	△	F6001	1-576-764-11	FUSE 10A 250V		
885		F	FUSE HOLDER		FH6001	1-576-766-11	FUSE HOLDER 14A 250V		
886		F	FUSE HOLDER		FH6002	1-576-766-11	FUSE HOLDER 14A 250V		
887		F	COIL	△	L6002	1-456-856-21	LINE FILTER COIL		
888		F	RESISTOR	△	R6001	1-247-289-00	METAL 8.2M 5% 1W		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
889		F	RESISTOR		R6002	1-219-759-11	METAL 1M 5% 1/2W		
890		F	VARISTOR	△	VD6001	1-805-483-21	VARISTOR		
891		F	VARISTOR	△	VD6002	1-805-483-21	VARISTOR		
892		H3	CAPACITOR		C1200	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
893		H3	CAPACITOR		C1201	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
894		H3	CAPACITOR		C1203	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
895		H3	CONNECTOR		CN1200	1-770-627-21	PIN, CONNECTOR 10P		
896		H3	CONNECTOR		CN1201	1-580-056-91	PIN, CONNECTOR 3P		
897		H3	DIODE		D1200	8-719-085-31	DIODE MM3Z2V4T1		
898		H3	DIODE		D1201	8-719-085-31	DIODE MM3Z2V4T1		
899		H3	DIODE		D1202	8-719-085-31	DIODE MM3Z2V4T1		
900		H3	DIODE		D1203	8-719-081-23	DIODE L-53SRD-H-F01		
901		H3	DIODE		D1204	6-500-425-01	DIODE SELU1E50CM		
902		H3	DIODE		D1205	6-500-487-01	DIODE SMLU12D16W		
903		H3	DIODE		D1206	8-719-081-23	DIODE L-53SRD-H-F01		
904		H3	TRANSISTOR		Q1201	8-729-028-73	TRANSISTOR DTA114EUA-T106		
905		H3	TRANSISTOR		Q1203	8-729-907-00	TRANSISTOR DTC114EU		
906		H3	TRANSISTOR		Q1204	8-729-907-00	TRANSISTOR DTC114EU		
907		H3	TRANSISTOR		Q1205	8-729-028-73	TRANSISTOR DTA114EUA-T106		
908		H3	TRANSISTOR		Q1206	8-729-907-00	TRANSISTOR DTC114EU		
909		H3	TRANSISTOR		Q1207	8-729-907-00	TRANSISTOR DTC114EU		
910		H3	RESISTOR		R1200	1-216-833-11	METAL CHIP 10K 5% 1/10W		
911		H3	RESISTOR		R1203	1-216-817-11	METAL CHIP 470 5% 1/10W		
912		H3	RESISTOR		R1204	1-216-864-11	SHORT CHIP 0		
913		H3	RESISTOR		R1207	1-216-864-11	SHORT CHIP 0		
914		H3	RESISTOR		R1210	1-216-812-11	METAL CHIP 180 5% 1/10W		
915		H3	RESISTOR		R1212	1-216-812-11	METAL CHIP 180 5% 1/10W		
916		H3	RESISTOR		R1213	1-216-811-11	METAL CHIP 150 5% 1/10W		
917		H3	RESISTOR		R1214	1-216-833-11	METAL CHIP 10K 5% 1/10W		
918		H3	RESISTOR		R1216	1-216-833-11	METAL CHIP 10K 5% 1/10W		
919		H3	RESISTOR		R1217	1-216-864-11	SHORT CHIP 0		
920		H3	RESISTOR		R1218	1-216-809-11	METAL CHIP 100 5% 1/10W		
921		H3	RESISTOR		R1219	1-216-864-11	SHORT CHIP 0		
922		H4	CONNECTOR		CN1501	1-580-056-91	PIN, CONNECTOR 3P		
923		H4	DIODE		D1501	6-501-198-01	DIODE NSPW500BS-A0-M		
924		H4	DIODE		D1505	6-501-198-01	DIODE NSPW500BS-A0-M		
925		H4	DIODE		D1509	6-501-198-01	DIODE NSPW500BS-A0-M		
926		H4	DIODE		D1513	6-501-198-01	DIODE NSPW500BS-A0-M		
927		H4	TRANSISTOR		Q1501	8-729-907-00	TRANSISTOR DTC114EU		
928		H4	TRANSISTOR		Q1503	8-729-907-00	TRANSISTOR DTC114EU		
929		H4	TRANSISTOR		Q1505	8-729-907-00	TRANSISTOR DTC114EU		
930		H4	TRANSISTOR		Q1507	8-729-907-00	TRANSISTOR DTC114EU		
931		H4	RESISTOR		R1501	1-211-989-11	METAL CHIP 68 0.5% 1/10W		
932		H4	RESISTOR		R1503	1-211-989-11	METAL CHIP 68 0.5% 1/10W		
933		H4	RESISTOR		R1511	1-211-989-11	METAL CHIP 68 0.5% 1/10W		
934		H4	RESISTOR		R1513	1-211-989-11	METAL CHIP 68 0.5% 1/10W		
935		H5	CAPACITOR		C1601	1-126-205-11	ELECT CHIP 47UF 20.00% 6.3V		
936		H5	CAPACITOR		C1602	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
937		H5	CONNECTOR		CN1601	1-691-550-91	PIN, CONNECTOR 3P		
938		H5	IC		IC1601	6-600-389-01	IC GP1UM26SRK1F		
939		H5	RESISTOR		R1601	1-216-805-11	METAL CHIP 47 5% 1/10W		
940		H1U	CAPACITOR		C1051	1-162-974-11	CERAMIC CHIP 0.01UF 50V		
941		H1U	CAPACITOR		C1052	1-162-974-11	CERAMIC CHIP 0.01UF 50V		
942		H1U	CONNECTOR		CN1051	1-580-756-91	PIN, CONNECTOR 7P		
943		H1U	RESISTOR		R1051	1-218-684-11	METAL CHIP 470 0.5% 1/10W		
944		H1U	RESISTOR		R1052	1-218-688-11	METAL CHIP 680 0.5% 1/10W		
945		H1U	RESISTOR		R1053	1-218-692-11	METAL CHIP 1K 0.5% 1/10W		
946		H1U	RESISTOR		R1054	1-218-700-11	METAL CHIP 2.2K 0.5% 1/10W		
947		H1U	SWITCH		S1051	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
948		H1U	SWITCH		S1052	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
949		H1U	SWITCH		S1053	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
950		H1U	SWITCH		S1054	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
951		H1U	SWITCH		S1055	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
952		H1U	SWITCH		S1056	1-692-539-11	SWITCH, KEYBOARD		
953		H2	CAPACITOR		C1101	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
954		H2	CAPACITOR		C1102	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
955		H2	CAPACITOR		C1103	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
956		H2	CAPACITOR		C1104	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
957		H2	CAPACITOR		C1105	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
958		H2	CAPACITOR		C1106	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
959		H2	CAPACITOR		C1107	1-162-965-11	CERAMIC CHIP 0.0015UF 10.00% 50V		
960		H2	CAPACITOR		C1108	1-162-965-11	CERAMIC CHIP 0.0015UF 10.00% 50V		
961		H2	CONNECTOR		CN1102	1-766-382-91	PIN, CONNECTOR 10P		
962		H2	CONNECTOR		CN1104	1-573-290-91	PIN, CONNECTOR 4P		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
963		H2	CONNECTOR		CN1106	1-695-915-11	TAB (CONTACT)		
964		H2	DIODE		D1105	8-719-977-28	DIODE DTZ10B		
965		H2	DIODE		D1106	8-719-977-28	DIODE DTZ10B		
966		H2	DIODE		D1107	8-719-977-28	DIODE DTZ10B		
967		H2	JACK		J1101	1-784-646-11	TERMINAL, S		
968		H2	JACK		J1102	1-580-443-11	JACK, PIN 3P		
969		H2	RESISTOR		R1101	1-216-811-11	METAL CHIP 150 5% 1/10W		
970		H2	RESISTOR		R1103	1-216-811-11	METAL CHIP 150 5% 1/10W		
971		H2	RESISTOR		R1104	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
972		H2	RESISTOR		R1105	1-216-851-11	METAL CHIP 330K 5% 1/10W		
973		H2	RESISTOR		R1106	1-216-851-11	METAL CHIP 330K 5% 1/10W		
974		H2	RESISTOR		R1114	1-216-864-11	SHORT CHIP 0		
975		H2	RESISTOR		R1115	1-216-811-11	METAL CHIP 150 5% 1/10W		
976		H2	RESISTOR		R1116	1-216-811-11	METAL CHIP 150 5% 1/10W		
977		H2	VARISTOR		VD1101	1-803-974-21	VARISTOR, CHIP (1608)		
978		H2	VARISTOR		VD1102	1-803-974-21	VARISTOR, CHIP (1608)		
979		H2	VARISTOR		VD1103	1-803-974-21	VARISTOR, CHIP (1608)		
980		A2NU	CAPACITOR		C2001	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
981		A2NU	CAPACITOR		C2002	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
982		A2NU	CAPACITOR		C2003	1-135-960-91	CERAMIC CHIP 10UF 10% 25V		
983		A2NU	CAPACITOR		C2004	1-135-960-91	CERAMIC CHIP 10UF 10% 25V		
984		A2NU	CAPACITOR		C2005	1-135-960-91	CERAMIC CHIP 10UF 10% 25V		
985		A2NU	CAPACITOR		C2006	1-135-960-91	CERAMIC CHIP 10UF 10% 25V		
986		A2NU	CAPACITOR		C2007	1-135-960-91	CERAMIC CHIP 10UF 10% 25V		
987		A2NU	CAPACITOR		C2008	1-135-960-91	CERAMIC CHIP 10UF 10% 25V		
988		A2NU	CAPACITOR		C2011	1-109-982-11	CERAMIC CHIP 1UF 10.00% 10V		
989		A2NU	CAPACITOR		C2012	1-109-982-11	CERAMIC CHIP 1UF 10.00% 10V		
990		A2NU	CAPACITOR		C2013	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V		
991		A2NU	CAPACITOR		C2014	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
992		A2NU	CAPACITOR		C2015	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V		
993		A2NU	CAPACITOR		C2016	1-164-217-11	CERAMIC CHIP 150PF 5.00% 50V		
994		A2NU	CAPACITOR		C2017	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
995		A2NU	CAPACITOR		C2018	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
996		A2NU	CAPACITOR		C2019	1-125-827-91	CERAMIC CHIP 1UF 10.00% 25V		
997		A2NU	CAPACITOR		C2020	1-125-827-91	CERAMIC CHIP 1UF 10.00% 25V		
998		A2NU	CAPACITOR		C2021	1-135-960-91	CERAMIC CHIP 10UF 10% 25V		
999		A2NU	CAPACITOR		C2022	1-135-960-91	CERAMIC CHIP 10UF 10% 25V		
1000		A2NU	CAPACITOR		C2023	1-165-875-11	CERAMIC CHIP 10UF 10% 10V		
1001		A2NU	CAPACITOR		C2024	1-165-875-11	CERAMIC CHIP 10UF 10% 10V		
1002		A2NU	CAPACITOR		C2025	1-125-827-91	CERAMIC CHIP 1UF 10.00% 25V		
1003		A2NU	CAPACITOR		C2026	1-125-827-91	CERAMIC CHIP 1UF 10.00% 25V		
1004		A2NU	CAPACITOR		C2027	1-125-827-91	CERAMIC CHIP 1UF 10.00% 25V		
1005		A2NU	CAPACITOR		C2028	1-125-827-91	CERAMIC CHIP 1UF 10.00% 25V		
1006		A2NU	CAPACITOR		C2029	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1007		A2NU	CAPACITOR		C2030	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1008		A2NU	CAPACITOR		C2031	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
1009		A2NU	CAPACITOR		C2032	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
1010		A2NU	CAPACITOR		C2033	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1011		A2NU	CAPACITOR		C2034	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1012		A2NU	CAPACITOR		C2035	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V		
1013		A2NU	CAPACITOR		C2036	1-109-982-11	CERAMIC CHIP 1UF 10.00% 10V		
1014		A2NU	CAPACITOR		C2037	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V		
1015		A2NU	CAPACITOR		C2038	1-109-982-11	CERAMIC CHIP 1UF 10.00% 10V		
1016		A2NU	CAPACITOR		C2041	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
1017		A2NU	CAPACITOR		C2042	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
1018		A2NU	CAPACITOR		C2043	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
1019		A2NU	CAPACITOR		C2044	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
1020		A2NU	CAPACITOR		C2054	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
1021		A2NU	CAPACITOR		C2055	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1022		A2NU	CAPACITOR		C2056	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1023		A2NU	CAPACITOR		C2059	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1024		A2NU	CAPACITOR		C2060	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
1025		A2NU	CAPACITOR		C2061	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
1026		A2NU	CAPACITOR		C2062	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
1027		A2NU	CAPACITOR		C2065	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1028		A2NU	CAPACITOR		C2066	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
1029		A2NU	CAPACITOR		C2100	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1030		A2NU	CAPACITOR		C2103	1-109-982-11	CERAMIC CHIP 1UF 10.00% 10V		
1031		A2NU	CAPACITOR		C2104	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1032		A2NU	CAPACITOR		C2105	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1033		A2NU	CONNECTOR		CN2001	1-774-729-21	PIN, CONNECTOR (PC BOARD) 10P		
1034		A2NU	CONNECTOR		CN2002	1-580-756-21	PIN, CONNECTOR (SMD) 7P		
1035		A2NU	CONNECTOR		CN2003	1-580-056-21	PIN, CONNECTOR (SMD) 3P		
1036		A2NU	CONNECTOR		CN2004	1-774-297-21	PIN, CONNECTOR (PC BOARD) 7P		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1037		A2NU	CONNECTOR		CN2005	1-817-194-21	PIN, CONNECTOR (SMD) 13P		
1038		A2NU	CONNECTOR		CN8208	1-815-468-11	PIN, CONNECTOR (PC BOARD)		
1039		A2NU	CONNECTOR		CN8209	1-770-161-21	PIN, CONNECTOR (PC BOARD) 6P		
1040		A2NU	CONNECTOR	*	CN8210	1-580-055-21	PIN, CONNECTOR (SMD) 2P		
1041		A2NU	CONNECTOR	*	CN8211	1-569-775-21	PIN, CONNECTOR (SMD) 5P		
1042		A2NU	PIN(45), WIRE	*	CP2001	4-042-408-02	PIN(45), WIRE		
1043		A2NU	WIRE PIN	*	CP2002	4-042-408-02	PIN(45), WIRE		
1044		A2NU	WIRE PIN	*	CP2003	4-042-408-02	PIN(45), WIRE		
1045		A2NU	WIRE PIN	*	CP2004	4-042-408-02	PIN(45), WIRE		
1046		A2NU	WIRE PIN	*	CP2005	4-042-408-02	PIN(45), WIRE		
1047		A2NU	DIODE		D2001	8-719-071-34	DIODE RB521S-30-TE61		
1048		A2NU	DIODE		D2002	8-719-071-34	DIODE RB521S-30-TE61		
1049		A2NU	DIODE		D2003	8-719-078-04	DIODE EC31QS03L-TE12L		
1050		A2NU	DIODE		D2004	8-719-078-04	DIODE EC31QS03L-TE12L		
1051		A2NU	DIODE		D2005	8-719-078-04	DIODE EC31QS03L-TE12L		
1052		A2NU	DIODE		D2006	8-719-078-04	DIODE EC31QS03L-TE12L		
1053		A2NU	DIODE		D2007	8-719-068-71	DIODE PTZ-TE25-13A		
1054		A2NU	DIODE		D2008	8-719-073-69	DIODE PTZ-TE25-6.2A		
1055		A2NU	DIODE		D2009	6-500-294-01	DIODE PTZ-TE25-3.9B		
1056		A2NU	DIODE		D2010	6-500-294-01	DIODE PTZ-TE25-3.9B		
1057		A2NU	DIODE		D2011	8-719-081-99	DIODE MM3Z13VT1		
1058		A2NU	DIODE		D2012	8-719-071-34	DIODE RB521S-30-TE61		
1059		A2NU	DIODE		D2013	8-719-056-82	DIODE UDZ-TE-17-6.2B		
1060		A2NU	DIODE		D2014	6-500-020-01	DIODE MM3Z4V3ST1		
1061		A2NU	DIODE		D2015	8-719-071-34	DIODE RB521S-30-TE61		
1062		A2NU	DIODE		D2016	8-719-056-82	DIODE UDZ-TE-17-6.2B		
1063		A2NU	DIODE		D2017	8-719-081-97	DIODE MMDL914T1		
1064		A2NU	DIODE		D2018	8-719-041-97	DIODE MA113-(TX)		
1065		A2NU	DIODE		D2019	6-500-540-01	DIODE RB521S-30FTE61		
1066		A2NU	DIODE		D2020	8-719-050-38	DIODE M1MA152WK-T1		
1067		A2NU	DIODE		D2021	8-719-050-38	DIODE M1MA152WK-T1		
1068		A2NU	DIODE		D2023	8-719-081-97	DIODE MMDL914T1		
1069		A2NU	DIODE		D2024	8-719-081-97	DIODE MMDL914T1		
1070		A2NU	DIODE		D2025	8-719-081-97	DIODE MMDL914T1		
1071		A2NU	DIODE		D2026	8-719-056-82	DIODE UDZ-TE-17-6.2B		
1072		A2NU	DIODE		D2027	8-719-056-84	DIODE UDZ-TE-17-7.5B		
1073		A2NU	FERRITE BEAD		FB2001	1-469-324-21	FERRITE 0UH		
1074		A2NU	FERRITE BEAD		FB2002	1-469-324-21	FERRITE 0UH		
1075		A2NU	FILTER		FL001	1-234-494-21	FILTER, EMI REMOVAL (SMD)		
1076		A2NU	FILTER		FL002	1-234-494-21	FILTER, EMI REMOVAL (SMD)		
1077		A2NU	FILTER		FL003	1-234-494-21	FILTER, EMI REMOVAL (SMD)		
1078		A2NU	FILTER		FL004	1-234-494-21	FILTER, EMI REMOVAL (SMD)		
1079		A2NU	FILTER		FL005	1-234-494-21	FILTER, EMI REMOVAL (SMD)		
1080		A2NU	FILTER		FL006	1-234-494-21	FILTER, EMI REMOVAL (SMD)		
1081		A2NU	IC		IC2001	6-706-884-01	IC BD9851EFV-E2		
1082		A2NU	IC		IC2002	6-706-884-01	IC BD9851EFV-E2		
1083		A2NU	IC		IC2004	8-759-668-14	IC PQ09DZ1UJ00H		
1084		A2NU	COIL		L2001	1-457-041-21	INDUCTOR 10UH		
1085		A2NU	COIL		L2002	1-457-041-21	INDUCTOR 10UH		
1086		A2NU	COIL		L2003	1-424-918-21	INDUCTOR 10UH		
1087		A2NU	COIL		L2004	1-424-918-21	INDUCTOR 10UH		
1088		A2NU	COIL		L2005	1-424-918-21	INDUCTOR 10UH		
1089		A2NU	COIL		L2006	1-424-918-21	INDUCTOR 10UH		
1090		A2NU	COIL		L2007	1-424-918-21	INDUCTOR 10UH		
1091		A2NU	COIL		L2008	1-424-918-21	INDUCTOR 10UH		
1092		A2NU	COIL		L2009	1-424-918-21	INDUCTOR 10UH		
1093		A2NU	COIL		L2010	1-424-918-21	INDUCTOR 10UH		
1094		A2NU	COIL		L2012	1-457-040-21	INDUCTOR 100UH		
1095		A2NU	COIL		L2013	1-457-040-21	INDUCTOR 100UH		
1096		A2NU	COIL		L2015	1-412-058-11	INDUCTOR 10UH		
1097		A2NU	IC LINK	△	PS2001	1-576-736-41	IC LINK 3.15A 24V		
1098		A2NU	IC LINK	△	PS2002	1-576-736-41	IC LINK 3.15A 24V		
1099		A2NU	TRANSISTOR		Q2001	6-550-585-01	TRANSISTOR 2PC4081R-115		
1100		A2NU	TRANSISTOR		Q2002	6-550-585-01	TRANSISTOR 2PC4081R-115		
1101		A2NU	TRANSISTOR		Q2003	6-550-652-01	TRANSISTOR FDS4435A		
1102		A2NU	TRANSISTOR		Q2004	6-550-652-01	TRANSISTOR FDS4435A		
1103		A2NU	TRANSISTOR		Q2005	8-729-422-29	TRANSISTOR 2SD601A-S		
1104		A2NU	TRANSISTOR		Q2006	6-550-652-01	TRANSISTOR FDS4435A		
1105		A2NU	TRANSISTOR		Q2008	6-550-380-01	TRANSISTOR IRFR5305TR		
1106		A2NU	TRANSISTOR		Q2009	6-550-585-01	TRANSISTOR 2PC4081R-115		
1107		A2NU	TRANSISTOR		Q2010	8-729-422-29	TRANSISTOR 2SD601A-S		
1108		A2NU	TRANSISTOR		Q2012	8-729-422-29	TRANSISTOR 2SD601A-S		
1109		A2NU	TRANSISTOR		Q2013	8-729-422-29	TRANSISTOR 2SD601A-S		
1110		A2NU	TRANSISTOR		Q2014	6-550-652-01	TRANSISTOR FDS4435A		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1111		A2NU	TRANSISTOR		Q2015	6-550-586-01	TRANSISTOR 2PA1576R-115		
1112		A2NU	TRANSISTOR		Q2016	8-729-117-73	TRANSISTOR 2SC4178-F14		
1113		A2NU	TRANSISTOR		Q2017	6-550-586-01	TRANSISTOR 2PA1576R-115		
1114		A2NU	TRANSISTOR		Q2018	6-550-586-01	TRANSISTOR 2PA1576R-115		
1115		A2NU	RESISTOR		R2001	1-216-864-11	SHORT CHIP 0		
1116		A2NU	RESISTOR		R2002	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1117		A2NU	RESISTOR		R2003	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1118		A2NU	RESISTOR		R2004	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1119		A2NU	RESISTOR		R2005	1-216-864-11	SHORT CHIP 0		
1120		A2NU	RESISTOR		R2006	1-216-864-11	SHORT CHIP 0		
1121		A2NU	RESISTOR		R2007	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1122		A2NU	RESISTOR		R2009	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1123		A2NU	RESISTOR		R2011	1-216-824-11	METAL CHIP 1.8K 5% 1/10W		
1124		A2NU	RESISTOR		R2012	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1125		A2NU	RESISTOR		R2013	1-216-864-11	SHORT CHIP 0		
1126		A2NU	RESISTOR		R2014	1-216-864-11	SHORT CHIP 0		
1127		A2NU	RESISTOR		R2015	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1128		A2NU	RESISTOR		R2016	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1129		A2NU	RESISTOR		R2017	1-216-819-11	METAL CHIP 680 5% 1/10W		
1130		A2NU	RESISTOR		R2018	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1131		A2NU	RESISTOR		R2019	1-218-881-11	METAL CHIP 27K 0.5% 1/10W		
1132		A2NU	RESISTOR		R2020	1-218-861-11	METAL CHIP 3.9K 0.5% 1/10W		
1133		A2NU	RESISTOR		R2021	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
1134		A2NU	RESISTOR		R2022	1-218-899-11	METAL CHIP 150K 0.5% 1/16W		
1135		A2NU	RESISTOR		R2023	1-218-859-11	METAL CHIP 3.3K 0.5% 1/10W		
1136		A2NU	RESISTOR		R2024	1-218-887-11	METAL CHIP 47K 0.5% 1/10W		
1137		A2NU	RESISTOR		R2025	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
1138		A2NU	RESISTOR		R2026	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
1139		A2NU	RESISTOR		R2027	1-218-875-11	METAL CHIP 15K 0.5% 1/10W		
1140		A2NU	RESISTOR		R2028	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
1141		A2NU	RESISTOR		R2029	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
1142		A2NU	RESISTOR		R2030	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
1143		A2NU	RESISTOR		R2031	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1144		A2NU	RESISTOR		R2033	1-218-875-11	METAL CHIP 15K 0.5% 1/10W		
1145		A2NU	RESISTOR		R2034	1-218-891-11	METAL CHIP 68K 0.5% 1/10W		
1146		A2NU	RESISTOR		R2035	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
1147		A2NU	RESISTOR		R2036	1-218-877-11	METAL CHIP 18K 0.5% 1/10W		
1148		A2NU	RESISTOR		R2037	1-218-895-11	METAL CHIP 100K 0.5% 1/10W		
1149		A2NU	RESISTOR		R2038	1-218-887-11	METAL CHIP 47K 0.5% 1/10W		
1150		A2NU	RESISTOR		R2039	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
1151		A2NU	RESISTOR		R2040	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
1152		A2NU	RESISTOR		R2041	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1153		A2NU	RESISTOR		R2042	1-216-864-11	SHORT CHIP 0		
1154		A2NU	RESISTOR		R2043	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1155		A2NU	RESISTOR		R2045	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1156		A2NU	RESISTOR		R2046	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1157		A2NU	RESISTOR		R2047	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
1158		A2NU	RESISTOR		R2048	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1159		A2NU	RESISTOR		R2049	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1160		A2NU	RESISTOR		R2050	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1161		A2NU	RESISTOR		R2069	1-216-809-11	METAL CHIP 100 5% 1/10W		
1162		A2NU	RESISTOR		R2072	1-216-864-11	SHORT CHIP 0		
1163		A2NU	RESISTOR		R2074	1-216-864-11	SHORT CHIP 0		
1164		A2NU	RESISTOR		R2075	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1165		A2NU	RESISTOR		R2076	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1166		A2NU	RESISTOR		R2077	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1167		A2NU	RESISTOR		R2078	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1168		A2NU	RESISTOR		R2081	1-216-864-11	SHORT CHIP 0		
1169		A2NU	RESISTOR		R2082	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1170		A2NU	RESISTOR		R2084	1-216-839-11	METAL CHIP 33K 5% 1/10W		
1171		A2NU	RESISTOR		R2085	1-216-834-11	METAL CHIP 12K 5% 1/10W		
1172		A2NU	RESISTOR		R2086	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1173		A2NU	RESISTOR		R2090	1-216-834-11	METAL CHIP 12K 5% 1/10W		
1174		A2NU	RESISTOR		R2091	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1175		A2NU	RESISTOR		R2092	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1176		A2NU	RESISTOR		R2093	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1177		A2NU	RESISTOR		R2094	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1178		A2NU	RESISTOR		R2097	1-216-809-11	METAL CHIP 100 5% 1/10W		
1179		A2NU	RESISTOR		R2098	1-216-815-11	METAL CHIP 330 5% 1/10W		
1180		A2NU	RESISTOR		R2099	1-216-864-11	SHORT CHIP 0		
1181		A2NU	RESISTOR		R2102	1-218-859-11	METAL CHIP 3.3K 0.5% 1/10W		
1182		A2NU	RESISTOR		R2103	1-218-899-11	METAL CHIP 150K 0.5% 1/16W		
1183		A2NU	RESISTOR		R2105	1-216-815-11	METAL CHIP 330 5% 1/10W		
1184		A2NU	RESISTOR		R2106	1-216-864-11	SHORT CHIP 0		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1185		A2NU	RESISTOR		R2107	1-216-797-11	METAL CHIP 10 5% 1/10W		
1186		A2NU	RESISTOR		R2109	1-216-815-11	METAL CHIP 330 5% 1/10W		
1187		A2NU	RESISTOR		R2110	1-216-807-11	METAL CHIP 68 5% 1/10W		
1188		A2NU	RESISTOR		R2111	1-216-815-11	METAL CHIP 330 5% 1/10W		
1189		A2NU	RESISTOR		R2112	1-216-803-11	METAL CHIP 33 5% 1/10W		
1190		A2NU	RESISTOR		R2114	1-216-809-11	METAL CHIP 100 5% 1/10W		
1191		A2NU	RESISTOR		R2115	1-216-809-11	METAL CHIP 100 5% 1/10W		
1192		A2NU	RESISTOR		R2116	1-216-864-11	SHORT CHIP 0		
1193		A2NU	RESISTOR		R2118	1-216-815-11	METAL CHIP 330 5% 1/10W		
1194		A2NU	RESISTOR		R2119	1-216-797-11	METAL CHIP 10 5% 1/10W		
1195		A2NU	RESISTOR		R2120	1-216-834-11	METAL CHIP 12K 5% 1/10W		
1196		A2NU	RESISTOR		R2121	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
1197		A2NU	RESISTOR		R2125	1-216-864-11	SHORT CHIP 0		
1198		A1U	CAPACITOR		C301	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1199		A1U	CAPACITOR		C302	1-125-837-91	CERAMIC CHIP 1UF 10% 6.3V		
1200		A1U	CAPACITOR		C303	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1201		A1U	CAPACITOR		C304	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1202		A1U	CAPACITOR		C306	1-165-176-11	CERAMIC CHIP 0.047UF 10.00% 16V		
1203		A1U	CAPACITOR		C307	1-164-230-11	CERAMIC CHIP 220PF 5.00% 50V		
1204		A1U	CAPACITOR		C308	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1205		A1U	CAPACITOR		C310	1-100-743-91	CERAMIC CHIP 2.2UF 20% 16V		
1206		A1U	CAPACITOR		C311	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1207		A1U	CAPACITOR		C312	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1208		A1U	CAPACITOR		C313	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1209		A1U	CAPACITOR		C314	1-100-743-91	CERAMIC CHIP 2.2UF 20% 16V		
1210		A1U	CAPACITOR		C315	1-126-603-11	ELECT CHIP 4.7UF 20.00% 35V		
1211		A1U	CAPACITOR		C316	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1212		A1U	CAPACITOR		C318	1-104-607-11	ELECT CHIP 47UF 20% 16V		
1213		A1U	CAPACITOR		C319	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1214		A1U	CAPACITOR		C320	1-162-965-11	CERAMIC CHIP 0.0015UF 10.00% 50V		
1215		A1U	CAPACITOR		C321	1-162-965-11	CERAMIC CHIP 0.0015UF 10.00% 50V		
1216		A1U	CAPACITOR		C322	1-162-965-11	CERAMIC CHIP 0.0015UF 10.00% 50V		
1217		A1U	CAPACITOR		C323	1-162-965-11	CERAMIC CHIP 0.0015UF 10.00% 50V		
1218		A1U	CAPACITOR		C324	1-137-980-91	CERAMIC CHIP 0.47UF 10% 50V		
1219		A1U	CAPACITOR		C325	1-126-603-11	ELECT CHIP 4.7UF 20.00% 35V		
1220		A1U	CAPACITOR		C326	1-115-467-11	CERAMIC CHIP 0.22UF 10.00% 10V		
1221		A1U	CAPACITOR		C327	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1222		A1U	CAPACITOR		C328	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1223		A1U	CAPACITOR		C329	1-100-743-91	CERAMIC CHIP 2.2UF 20% 16V		
1224		A1U	CAPACITOR		C330	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1225		A1U	CAPACITOR		C331	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1226		A1U	CAPACITOR		C332	1-100-743-91	CERAMIC CHIP 2.2UF 20% 16V		
1227		A1U	CAPACITOR		C333	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1228		A1U	CAPACITOR		C334	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1229		A1U	CAPACITOR		C335	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1230		A1U	CAPACITOR		C336	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1231		A1U	CAPACITOR		C337	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1232		A1U	CAPACITOR		C338	1-126-603-11	ELECT CHIP 4.7UF 20.00% 35V		
1233		A1U	CAPACITOR		C339	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1234		A1U	CAPACITOR		C340	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1235		A1U	CAPACITOR		C341	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1236		A1U	CAPACITOR		C342	1-137-980-91	CERAMIC CHIP 0.47UF 10% 50V		
1237		A1U	CAPACITOR		C343	1-126-603-11	ELECT CHIP 4.7UF 20.00% 35V		
1238		A1U	CAPACITOR		C344	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1239		A1U	CAPACITOR		C345	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1240		A1U	CAPACITOR		C346	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
1241		A1U	CAPACITOR		C352	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1242		A1U	CAPACITOR		C357	1-126-205-11	ELECT CHIP 47UF 20.00% 6.3V		
1243		A1U	CAPACITOR		C358	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1244		A1U	CAPACITOR		C359	1-125-837-91	CERAMIC CHIP 1UF 10% 6.3V		
1245		A1U	CAPACITOR		C363	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1246		A1U	CAPACITOR		C364	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1247		A1U	CAPACITOR		C365	1-125-837-91	CERAMIC CHIP 1UF 10% 6.3V		
1248		A1U	CAPACITOR		C366	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1249		A1U	CAPACITOR		C367	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1250		A1U	CAPACITOR		C368	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1251		A1U	CAPACITOR		C369	1-165-874-21	ELECT CHIP 120UF 20% 6.3V		
1252		A1U	CAPACITOR		C370	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1253		A1U	CAPACITOR		C371	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1254		A1U	CAPACITOR		C380	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1255		A1U	CAPACITOR		C382	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1256		A1U	CAPACITOR		C383	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
1257		A1U	CAPACITOR		C386	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1258		A1U	CAPACITOR		C387	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1259		A1U	CAPACITOR		C390	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1260		A1U	CAPACITOR		C391	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1261		A1U	CAPACITOR		C401	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
1262		A1U	CAPACITOR		C402	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1263		A1U	CAPACITOR		C404	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1264		A1U	CAPACITOR		C405	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1265		A1U	CAPACITOR		C406	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1266		A1U	CAPACITOR		C407	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1267		A1U	CAPACITOR		C416	1-162-965-11	CERAMIC CHIP 0.0015UF 10.00% 50V		
1268		A1U	CAPACITOR		C417	1-162-965-11	CERAMIC CHIP 0.0015UF 10.00% 50V		
1269		A1U	CAPACITOR		C418	1-162-965-11	CERAMIC CHIP 0.0015UF 10.00% 50V		
1270		A1U	CAPACITOR		C419	1-162-965-11	CERAMIC CHIP 0.0015UF 10.00% 50V		
1271		A1U	CAPACITOR		C430	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1272		A1U	CAPACITOR		C431	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1273		A1U	CAPACITOR		C432	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1274		A1U	CAPACITOR		C433	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1275		A1U	CAPACITOR		C434	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1276		A1U	CAPACITOR		C435	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1277		A1U	CAPACITOR		C436	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1278		A1U	CAPACITOR		C437	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1279		A1U	CAPACITOR		C438	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1280		A1U	CAPACITOR		C501	1-163-084-00	CERAMIC CHIP 1.5PF 0.25PF 50V		
1281		A1U	CAPACITOR		C502	1-163-084-00	CERAMIC CHIP 1.5PF 0.25PF 50V		
1282		A1U	CAPACITOR		C503	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1283		A1U	CAPACITOR		C505	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1284		A1U	CAPACITOR		C506	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1285		A1U	CAPACITOR		C507	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1286		A1U	CAPACITOR		C508	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
1287		A1U	CAPACITOR		C512	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1288		A1U	CAPACITOR		C513	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1289		A1U	CAPACITOR		C514	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1290		A1U	CAPACITOR		C515	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1291		A1U	CAPACITOR		C516	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1292		A1U	CAPACITOR		C517	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1293		A1U	CAPACITOR		C518	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
1294		A1U	CAPACITOR		C519	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1295		A1U	CAPACITOR		C521	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1296		A1U	CAPACITOR		C522	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1297		A1U	CAPACITOR		C523	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1298		A1U	CAPACITOR		C524	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1299		A1U	CAPACITOR		C525	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1300		A1U	CAPACITOR		C526	1-126-395-11	ELECT CHIP 22UF 20.00% 16V		
1301		A1U	CAPACITOR		C527	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1302		A1U	CAPACITOR		C528	1-126-204-11	ELECT CHIP 47UF 20.00% 16V		
1303		A1U	CAPACITOR		C529	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1304		A1U	CAPACITOR		C530	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1305		A1U	CAPACITOR		C531	1-162-960-11	CERAMIC CHIP 220PF 10.00% 50V		
1306		A1U	CAPACITOR		C532	1-162-960-11	CERAMIC CHIP 220PF 10.00% 50V		
1307		A1U	CAPACITOR		C533	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1308		A1U	CAPACITOR		C536	1-165-874-21	ELECT CHIP 120UF 20% 6.3V		
1309		A1U	CAPACITOR		C537	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
1310		A1U	CAPACITOR		C538	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1311		A1U	CAPACITOR		C539	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1312		A1U	CAPACITOR		C540	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1313		A1U	CAPACITOR		C541	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1314		A1U	CAPACITOR		C542	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1315		A1U	CAPACITOR		C543	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1316		A1U	CAPACITOR		C544	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1317		A1U	CAPACITOR		C545	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1318		A1U	CAPACITOR		C546	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1319		A1U	CAPACITOR		C547	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1320		A1U	CAPACITOR		C548	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1321		A1U	CAPACITOR		C549	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1322		A1U	CAPACITOR		C551	1-162-960-11	CERAMIC CHIP 220PF 10.00% 50V		
1323		A1U	CAPACITOR		C552	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1324		A1U	CAPACITOR		C553	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1325		A1U	CAPACITOR		C554	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1326		A1U	CAPACITOR		C555	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1327		A1U	CAPACITOR		C556	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1328		A1U	CAPACITOR		C557	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1329		A1U	CAPACITOR		C559	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1330		A1U	CAPACITOR		C561	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1331		A1U	CAPACITOR		C562	1-126-204-11	ELECT CHIP 47UF 20.00% 16V		
1332		A1U	CAPACITOR		C572	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1333		A1U	CAPACITOR		C573	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
1334		A1U	CAPACITOR		C578	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1335		A1U	CAPACITOR		C579	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1336		A1U	CAPACITOR		C583	1-162-960-11	CERAMIC CHIP 220PF 10.00% 50V		
1337		A1U	CAPACITOR		C584	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1338		A1U	CAPACITOR		C585	1-137-764-21	ELECT CHIP 22UF 20% 16V		
1339		A1U	CAPACITOR		C586	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
1340		A1U	CAPACITOR		C587	1-165-874-21	ELECT CHIP 120UF 20% 6.3V		
1341		A1U	CAPACITOR		C588	1-125-837-91	CERAMIC CHIP 1UF 10% 6.3V		
1342		A1U	CAPACITOR		C589	1-125-837-91	CERAMIC CHIP 1UF 10% 6.3V		
1343		A1U	CAPACITOR		C601	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1344		A1U	CAPACITOR		C602	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1345		A1U	CAPACITOR		C603	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
1346		A1U	CAPACITOR		C604	1-126-204-11	ELECT CHIP 47UF 20.00% 16V		
1347		A1U	CAPACITOR		C605	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
1348		A1U	CAPACITOR		C606	1-115-416-11	CERAMIC CHIP 0.001UF 5.00% 25V		
1349		A1U	CAPACITOR		C607	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1350		A1U	CAPACITOR		C608	1-162-960-11	CERAMIC CHIP 220PF 10.00% 50V		
1351		A1U	CAPACITOR		C609	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
1352		A1U	CAPACITOR		C610	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
1353		A1U	CAPACITOR		C611	1-126-204-11	ELECT CHIP 47UF 20.00% 16V		
1354		A1U	CAPACITOR		C612	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
1355		A1U	CAPACITOR		C613	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1356		A1U	CAPACITOR		C614	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1357		A1U	CAPACITOR		C615	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1358		A1U	CAPACITOR		C617	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1359		A1U	CAPACITOR		C618	1-162-960-11	CERAMIC CHIP 220PF 10.00% 50V		
1360		A1U	CAPACITOR		C619	1-162-960-11	CERAMIC CHIP 220PF 10.00% 50V		
1361		A1U	CAPACITOR		C620	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1362		A1U	CAPACITOR		C621	1-162-960-11	CERAMIC CHIP 220PF 10.00% 50V		
1363		A1U	CAPACITOR		C622	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1364		A1U	CAPACITOR		C648	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1365		A1U	CAPACITOR		C649	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1366		A1U	CAPACITOR		C650	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1367		A1U	CAPACITOR		C651	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1368		A1U	CAPACITOR		C653	1-126-601-11	ELECT CHIP 2.2UF 20.00% 50V		
1369		A1U	CAPACITOR		C654	1-126-395-11	ELECT CHIP 22UF 20.00% 16V		
1370		A1U	CAPACITOR		C656	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1371		A1U	CAPACITOR		C657	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1372		A1U	CAPACITOR		C658	1-126-397-11	ELECT CHIP 33UF 20.00% 25V		
1373		A1U	CAPACITOR		C659	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1374		A1U	CONNECTOR		CN002	1-764-087-21	PIN, CONNECTOR (PC BOARD) 14P		
1375		A1U	CONNECTOR		CN005	1-766-382-21	PIN, CONNECTOR (1.5MM)(SMD)10P		
1376		A1U	CONNECTOR	*	CN006	1-785-531-11	PIN, CONNECTOR (PC BOARD) 12P		
1377		A1U	CONNECTOR		CN301	1-580-056-21	PIN, CONNECTOR (SMD) 3P		
1378		A1U	CONNECTOR		CN304	1-774-771-11	CONNECTOR, FFC/FPC 14P		
1379		A1U	CONNECTOR		CN306	1-770-161-21	PIN, CONNECTOR (PC BOARD) 6P		
1380		A1U	DIODE		D301	8-719-977-28	DIODE DTZ10B		
1381		A1U	DIODE		D302	8-719-977-28	DIODE DTZ10B		
1382		A1U	DIODE		D303	8-719-977-28	DIODE DTZ10B		
1383		A1U	DIODE		D304	8-719-977-28	DIODE DTZ10B		
1384		A1U	DIODE		D311	8-719-977-28	DIODE DTZ10B		
1385		A1U	DIODE		D312	8-719-977-28	DIODE DTZ10B		
1386		A1U	DIODE		D313	8-719-977-28	DIODE DTZ10B		
1387		A1U	DIODE		D314	8-719-977-28	DIODE DTZ10B		
1388		A1U	DIODE		D315	8-719-977-28	DIODE DTZ10B		
1389		A1U	DIODE		D316	8-719-977-28	DIODE DTZ10B		
1390		A1U	DIODE		D317	8-719-977-28	DIODE DTZ10B		
1391		A1U	DIODE		D318	8-719-977-28	DIODE DTZ10B		
1392		A1U	DIODE		D319	8-719-977-28	DIODE DTZ10B		
1393		A1U	DIODE		D320	8-719-977-28	DIODE DTZ10B		
1394		A1U	DIODE		D322	8-719-082-05	DIODE M1MA142WKT1		
1395		A1U	DIODE		D323	8-719-024-77	DIODE HN1D03FU-TE85L		
1396		A1U	DIODE		D407	8-719-977-28	DIODE DTZ10B		
1397		A1U	DIODE		D408	8-719-977-28	DIODE DTZ10B		
1398		A1U	DIODE		D409	8-719-977-28	DIODE DTZ10B		
1399		A1U	DIODE		D410	8-719-977-28	DIODE DTZ10B		
1400		A1U	DIODE		D501	8-719-977-28	DIODE DTZ10B		
1401		A1U	DIODE		D502	8-719-977-28	DIODE DTZ10B		
1402		A1U	DIODE		D505	8-719-050-37	DIODE M1MA152WA-T1		
1403		A1U	DIODE		D506	8-719-988-61	DIODE 1SS355TE-17		
1404		A1U	DIODE		D508	8-719-988-61	DIODE 1SS355TE-17		
1405		A1U	DIODE		D509	8-719-988-61	DIODE 1SS355TE-17		
1406		A1U	DIODE		D510	8-719-988-61	DIODE 1SS355TE-17		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1407		A1U	DIODE		D601	6-500-027-01	DIODE MM3Z8V2ST1		
1408		A1U	DIODE		D602	6-500-027-01	DIODE MM3Z8V2ST1		
1409		A1U	DIODE		D607	8-719-988-61	DIODE 1SS355TE-17		
1410		A1U	DIODE		D608	8-719-988-61	DIODE 1SS355TE-17		
1411		A1U	DIODE		D609	8-719-988-61	DIODE 1SS355TE-17		
1412		A1U	FERRITE BEAD		FB401	1-216-295-91	SHORT CHIP 0		
1413		A1U	FERRITE BEAD		FB501	1-414-921-11	FERRITE 0UH		
1414		A1U	FERRITE BEAD		FB502	1-414-921-11	FERRITE 0UH		
1415		A1U	FERRITE BEAD		FB503	1-414-921-11	FERRITE 0UH		
1416		A1U	FERRITE BEAD		FB504	1-414-760-21	FERRITE 0UH		
1417		A1U	FERRITE BEAD		FB505	1-414-760-21	FERRITE 0UH		
1418		A1U	FERRITE BEAD		FB506	1-414-760-21	FERRITE 0UH		
1419		A1U	FERRITE BEAD		FB507	1-414-760-21	FERRITE 0UH		
1420		A1U	IC		IC303	8-753-204-12	IC CXA2209Q-T6		
1421		A1U	IC		IC404	8-759-548-56	IC M52055FP		
1422		A1U	IC		IC500	8-759-661-88	IC NJM2123V(Te2)		
1423		A1U	IC		IC501	8-759-278-58	IC NJM4558V-TE2		
1424		A1U	IC		IC502	8-759-082-61	IC TC4W53FU		
1425		A1U	IC		IC504	8-759-278-58	IC NJM4558V-TE2		
1426		A1U	IC		IC507	8-752-107-98	IC CXA2188Q-T4		
1427		A1U	IC		IC510	8-759-278-58	IC NJM4558V-TE2		
1428		A1U	IC		IC512	8-759-592-45	IC TC7SZU04FU(Te85R)		
1429		A1U	IC		IC514	8-759-183-53	IC TL431CPK-E2		
1430		A1U	IC		IC521	6-706-903-01	IC AK5357VT-E2		
1431		A1U	IC		IC522	6-706-897-01	IC MSP4440K-QA-B2		
1432		A1U	IC		IC523	6-706-536-01	IC CXD9826R		
1433		A1U	IC		IC524	6-705-030-01	IC IC62C1024AL-70QG		
1434		A1U	IC		IC526	8-759-278-58	IC NJM4558V-TE2		
1435		A1U	JACK		J300	1-818-957-11	PIN JACK BLOCK 2P		
1436		A1U	JACK		J301	1-507-792-31	JACK		
1437		A1U	JACK		J302	1-818-957-11	PIN JACK BLOCK 2P		
1438		A1U	JACK		J303	1-507-792-31	JACK		
1439		A1U	JACK		J304	1-818-931-11	PIN JACK BLOCK 3P		
1440		A1U	JACK		J305	1-537-712-21	PUSH TERMINAL		
1441		A1U	JACK		J307	1-817-098-11	PIN JACK BLOCK 3P		
1442		A1U	JACK		J309	1-780-051-11	TERMINAL BLOCK, (S)		
1443		A1U	JACK		J310	1-818-931-11	PIN JACK BLOCK 3P		
1444		A1U	RESISTOR		JR001	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1445		A1U	RESISTOR		JR002	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1446		A1U	RESISTOR		JR003	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1447		A1U	COIL		L306	1-412-058-11	INDUCTOR 10UH		
1448		A1U	COIL		L307	1-216-295-91	SHORT CHIP 0		
1449		A1U	COIL		L308	1-412-058-11	INDUCTOR 10UH		
1450		A1U	COIL		L309	1-412-064-11	INDUCTOR 100UH		
1451		A1U	COIL		L310	1-412-064-11	INDUCTOR 100UH		
1452		A1U	COIL		L313	1-412-058-11	INDUCTOR 10UH		
1453		A1U	COIL		L401	1-412-064-11	INDUCTOR 100UH		
1454		A1U	COIL		L501	1-469-549-21	INDUCTOR 1UH		
1455		A1U	COIL		L502	1-469-549-21	INDUCTOR 1UH		
1456		A1U	COIL		L503	1-412-058-11	INDUCTOR 10UH		
1457		A1U	COIL		L504	1-412-058-11	INDUCTOR 10UH		
1458		A1U	COIL		L505	1-469-549-21	INDUCTOR 1UH		
1459		A1U	COIL		L514	1-412-058-11	INDUCTOR 10UH		
1460		A1U	COIL		L516	1-412-058-11	INDUCTOR 10UH		
1461		A1U	TRANSISTOR		Q301	8-729-422-33	TRANSISTOR 2SD601A-Q-TX		
1462		A1U	TRANSISTOR		Q302	8-729-216-22	TRANSISTOR 2SA1162-G		
1463		A1U	TRANSISTOR		Q303	8-729-216-22	TRANSISTOR 2SA1162-G		
1464		A1U	TRANSISTOR		Q304	8-729-422-33	TRANSISTOR 2SD601A-Q-TX		
1465		A1U	TRANSISTOR		Q305	8-729-216-22	TRANSISTOR 2SA1162-G		
1466		A1U	TRANSISTOR		Q306	8-729-216-22	TRANSISTOR 2SA1162-G		
1467		A1U	TRANSISTOR		Q307	8-729-422-33	TRANSISTOR 2SD601A-Q-TX		
1468		A1U	TRANSISTOR		Q308	8-729-216-22	TRANSISTOR 2SA1162-G		
1469		A1U	TRANSISTOR		Q309	8-729-422-33	TRANSISTOR 2SD601A-Q-TX		
1470		A1U	TRANSISTOR		Q310	8-729-422-33	TRANSISTOR 2SD601A-Q-TX		
1471		A1U	TRANSISTOR		Q311	8-729-422-33	TRANSISTOR 2SD601A-Q-TX		
1472		A1U	TRANSISTOR		Q312	8-729-216-22	TRANSISTOR 2SA1162-G		
1473		A1U	TRANSISTOR		Q313	6-550-586-01	TRANSISTOR 2PA1576R-115		
1474		A1U	TRANSISTOR		Q314	6-550-586-01	TRANSISTOR 2PA1576R-115		
1475		A1U	TRANSISTOR		Q315	8-729-216-22	TRANSISTOR 2SA1162-G		
1476		A1U	TRANSISTOR		Q316	6-550-586-01	TRANSISTOR 2PA1576R-115		
1477		A1U	TRANSISTOR		Q317	8-729-422-33	TRANSISTOR 2SD601A-Q-TX		
1478		A1U	TRANSISTOR		Q318	6-550-586-01	TRANSISTOR 2PA1576R-115		
1479		A1U	TRANSISTOR		Q320	6-550-586-01	TRANSISTOR 2PA1576R-115		
1480		A1U	TRANSISTOR		Q321	6-550-586-01	TRANSISTOR 2PA1576R-115		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1481		A1U	TRANSISTOR		Q410	6-550-586-01	TRANSISTOR 2PA1576R-115		
1482		A1U	TRANSISTOR		Q411	6-550-586-01	TRANSISTOR 2PA1576R-115		
1483		A1U	TRANSISTOR		Q412	6-550-586-01	TRANSISTOR 2PA1576R-115		
1484		A1U	TRANSISTOR		Q501	8-729-422-33	TRANSISTOR 2SD601A-Q-TX		
1485		A1U	TRANSISTOR		Q502	8-729-422-33	TRANSISTOR 2SD601A-Q-TX		
1486		A1U	TRANSISTOR		Q503	8-729-422-33	TRANSISTOR 2SD601A-Q-TX		
1487		A1U	TRANSISTOR		Q504	8-729-422-33	TRANSISTOR 2SD601A-Q-TX		
1488		A1U	TRANSISTOR		Q505	6-550-586-01	TRANSISTOR 2PA1576R-115		
1489		A1U	TRANSISTOR		Q508	6-550-586-01	TRANSISTOR 2PA1576R-115		
1490		A1U	TRANSISTOR		Q509	8-729-421-19	TRANSISTOR UN2213		
1491		A1U	TRANSISTOR		Q510	8-729-421-19	TRANSISTOR UN2213		
1492		A1U	TRANSISTOR		Q512	8-729-422-33	TRANSISTOR 2SD601A-Q-TX		
1493		A1U	TRANSISTOR		Q513	8-729-422-33	TRANSISTOR 2SD601A-Q-TX		
1494		A1U	TRANSISTOR		Q514	6-550-586-01	TRANSISTOR 2PA1576R-115		
1495		A1U	TRANSISTOR		Q515	8-729-421-19	TRANSISTOR UN2213		
1496		A1U	RESISTOR		R001	1-216-864-11	SHORT CHIP 0		
1497		A1U	RESISTOR		R002	1-216-864-11	SHORT CHIP 0		
1498		A1U	RESISTOR		R003	1-216-805-11	METAL CHIP 47 5% 1/10W		
1499		A1U	RESISTOR		R004	1-216-864-11	SHORT CHIP 0		
1500		A1U	RESISTOR		R005	1-216-864-11	SHORT CHIP 0		
1501		A1U	RESISTOR		R006	1-216-864-11	SHORT CHIP 0		
1502		A1U	RESISTOR		R013	1-218-827-11	METAL CHIP 150 0.5% 1/10W		
1503		A1U	RESISTOR		R014	1-218-827-11	METAL CHIP 150 0.5% 1/10W		
1504		A1U	RESISTOR		R015	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W		
1505		A1U	RESISTOR		R016	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
1506		A1U	RESISTOR		R017	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1507		A1U	RESISTOR		R018	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1508		A1U	RESISTOR		R019	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
1509		A1U	RESISTOR		R020	1-216-809-11	METAL CHIP 100 5% 1/10W		
1510		A1U	RESISTOR		R021	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1511		A1U	RESISTOR		R022	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1512		A1U	RESISTOR		R023	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
1513		A1U	RESISTOR		R024	1-216-809-11	METAL CHIP 100 5% 1/10W		
1514		A1U	RESISTOR		R074	1-216-864-11	SHORT CHIP 0		
1515		A1U	RESISTOR		R076	1-216-864-11	SHORT CHIP 0		
1516		A1U	RESISTOR		R086	1-216-824-11	METAL CHIP 1.8K 5% 1/10W		
1517		A1U	RESISTOR		R087	1-216-824-11	METAL CHIP 1.8K 5% 1/10W		
1518		A1U	RESISTOR		R088	1-216-864-11	SHORT CHIP 0		
1519		A1U	RESISTOR		R090	1-216-818-11	METAL CHIP 560 5% 1/10W		
1520		A1U	RESISTOR		R301	1-216-864-11	SHORT CHIP 0		
1521		A1U	RESISTOR		R302	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1522		A1U	RESISTOR		R303	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1523		A1U	RESISTOR		R304	1-216-809-11	METAL CHIP 100 5% 1/10W		
1524		A1U	RESISTOR		R305	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1525		A1U	RESISTOR		R306	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1526		A1U	RESISTOR		R307	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1527		A1U	RESISTOR		R308	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1528		A1U	RESISTOR		R309	1-218-734-11	METAL CHIP 56K 0.5% 1/10W		
1529		A1U	RESISTOR		R310	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1530		A1U	RESISTOR		R311	1-216-809-11	METAL CHIP 100 5% 1/10W		
1531		A1U	RESISTOR		R312	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1532		A1U	RESISTOR		R313	1-216-809-11	METAL CHIP 100 5% 1/10W		
1533		A1U	RESISTOR		R314	1-216-809-11	METAL CHIP 100 5% 1/10W		
1534		A1U	RESISTOR		R315	1-216-805-11	METAL CHIP 47 5% 1/10W		
1535		A1U	RESISTOR		R316	1-216-805-11	METAL CHIP 47 5% 1/10W		
1536		A1U	RESISTOR		R321	1-216-809-11	METAL CHIP 100 5% 1/10W		
1537		A1U	RESISTOR		R322	1-216-809-11	METAL CHIP 100 5% 1/10W		
1538		A1U	RESISTOR		R323	1-216-809-11	METAL CHIP 100 5% 1/10W		
1539		A1U	RESISTOR		R324	1-216-809-11	METAL CHIP 100 5% 1/10W		
1540		A1U	RESISTOR		R325	1-216-809-11	METAL CHIP 100 5% 1/10W		
1541		A1U	RESISTOR		R326	1-216-809-11	METAL CHIP 100 5% 1/10W		
1542		A1U	RESISTOR		R327	1-216-809-11	METAL CHIP 100 5% 1/10W		
1543		A1U	RESISTOR		R328	1-216-864-11	SHORT CHIP 0		
1544		A1U	RESISTOR		R329	1-216-811-11	METAL CHIP 150 5% 1/10W		
1545		A1U	RESISTOR		R330	1-216-809-11	METAL CHIP 100 5% 1/10W		
1546		A1U	RESISTOR		R331	1-216-809-11	METAL CHIP 100 5% 1/10W		
1547		A1U	RESISTOR		R332	1-216-809-11	METAL CHIP 100 5% 1/10W		
1548		A1U	RESISTOR		R333	1-216-813-11	METAL CHIP 220 5% 1/10W		
1549		A1U	RESISTOR		R334	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1550		A1U	RESISTOR		R335	1-216-797-11	METAL CHIP 10 5% 1/10W		
1551		A1U	RESISTOR		R336	1-216-797-11	METAL CHIP 10 5% 1/10W		
1552		A1U	RESISTOR		R337	1-216-797-11	METAL CHIP 10 5% 1/10W		
1553		A1U	RESISTOR		R338	1-216-797-11	METAL CHIP 10 5% 1/10W		
1554		A1U	RESISTOR		R339	1-216-797-11	METAL CHIP 10 5% 1/10W		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1555		A1U	RESISTOR		R340	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1556		A1U	RESISTOR		R341	1-216-809-11	METAL CHIP 100 5% 1/10W		
1557		A1U	RESISTOR		R342	1-216-811-11	METAL CHIP 150 5% 1/10W		
1558		A1U	RESISTOR		R343	1-216-811-11	METAL CHIP 150 5% 1/10W		
1559		A1U	RESISTOR		R344	1-218-285-11	METAL CHIP 75 5% 1/10W		
1560		A1U	RESISTOR		R345	1-218-285-11	METAL CHIP 75 5% 1/10W		
1561		A1U	RESISTOR		R346	1-218-285-11	METAL CHIP 75 5% 1/10W		
1562		A1U	RESISTOR		R347	1-216-864-11	SHORT CHIP 0		
1563		A1U	RESISTOR		R348	1-216-809-11	METAL CHIP 100 5% 1/10W		
1564		A1U	RESISTOR		R349	1-216-864-11	SHORT CHIP 0		
1565		A1U	RESISTOR		R350	1-216-864-11	SHORT CHIP 0		
1566		A1U	RESISTOR		R351	1-216-864-11	SHORT CHIP 0		
1567		A1U	RESISTOR		R352	1-216-864-11	SHORT CHIP 0		
1568		A1U	RESISTOR		R353	1-216-809-11	METAL CHIP 100 5% 1/10W		
1569		A1U	RESISTOR		R354	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1570		A1U	RESISTOR		R355	1-218-692-11	METAL CHIP 1K 0.5% 1/10W		
1571		A1U	RESISTOR		R356	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W		
1572		A1U	RESISTOR		R357	1-216-864-11	SHORT CHIP 0		
1573		A1U	RESISTOR		R358	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1574		A1U	RESISTOR		R359	1-216-864-11	SHORT CHIP 0		
1575		A1U	RESISTOR		R360	1-216-864-11	SHORT CHIP 0		
1576		A1U	RESISTOR		R362	1-216-811-11	METAL CHIP 150 5% 1/10W		
1577		A1U	RESISTOR		R363	1-216-811-11	METAL CHIP 150 5% 1/10W		
1578		A1U	RESISTOR		R364	1-216-864-11	SHORT CHIP 0		
1579		A1U	RESISTOR		R365	1-216-864-11	SHORT CHIP 0		
1580		A1U	RESISTOR		R366	1-216-811-11	METAL CHIP 150 5% 1/10W		
1581		A1U	RESISTOR		R367	1-216-811-11	METAL CHIP 150 5% 1/10W		
1582		A1U	RESISTOR		R368	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1583		A1U	RESISTOR		R369	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1584		A1U	RESISTOR		R370	1-216-815-11	METAL CHIP 330 5% 1/10W		
1585		A1U	RESISTOR		R371	1-216-809-11	METAL CHIP 100 5% 1/10W		
1586		A1U	RESISTOR		R372	1-216-864-11	SHORT CHIP 0		
1587		A1U	RESISTOR		R373	1-216-815-11	METAL CHIP 330 5% 1/10W		
1588		A1U	RESISTOR		R374	1-216-809-11	METAL CHIP 100 5% 1/10W		
1589		A1U	RESISTOR		R375	1-216-811-11	METAL CHIP 150 5% 1/10W		
1590		A1U	RESISTOR		R376	1-216-864-11	SHORT CHIP 0		
1591		A1U	RESISTOR		R377	1-216-815-11	METAL CHIP 330 5% 1/10W		
1592		A1U	RESISTOR		R378	1-216-811-11	METAL CHIP 150 5% 1/10W		
1593		A1U	RESISTOR		R379	1-216-811-11	METAL CHIP 150 5% 1/10W		
1594		A1U	RESISTOR		R380	1-216-809-11	METAL CHIP 100 5% 1/10W		
1595		A1U	RESISTOR		R381	1-216-864-11	SHORT CHIP 0		
1596		A1U	RESISTOR		R382	1-216-864-11	SHORT CHIP 0		
1597		A1U	RESISTOR		R383	1-216-864-11	SHORT CHIP 0		
1598		A1U	RESISTOR		R384	1-216-811-11	METAL CHIP 150 5% 1/10W		
1599		A1U	RESISTOR		R385	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1600		A1U	RESISTOR		R386	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1601		A1U	RESISTOR		R388	1-216-811-11	METAL CHIP 150 5% 1/10W		
1602		A1U	RESISTOR		R389	1-216-815-11	METAL CHIP 330 5% 1/10W		
1603		A1U	RESISTOR		R392	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
1604		A1U	RESISTOR		R393	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
1605		A1U	RESISTOR		R394	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
1606		A1U	RESISTOR		R395	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1607		A1U	RESISTOR		R396	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1608		A1U	RESISTOR		R397	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1609		A1U	RESISTOR		R398	1-216-809-11	METAL CHIP 100 5% 1/10W		
1610		A1U	RESISTOR		R401	1-216-809-11	METAL CHIP 100 5% 1/10W		
1611		A1U	RESISTOR		R402	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1612		A1U	RESISTOR		R403	1-216-809-11	METAL CHIP 100 5% 1/10W		
1613		A1U	RESISTOR		R404	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1614		A1U	RESISTOR		R405	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1615		A1U	RESISTOR		R406	1-216-847-11	METAL CHIP 150K 5% 1/10W		
1616		A1U	RESISTOR		R407	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1617		A1U	RESISTOR		R408	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1618		A1U	RESISTOR		R409	1-216-809-11	METAL CHIP 100 5% 1/10W		
1619		A1U	RESISTOR		R410	1-216-809-11	METAL CHIP 100 5% 1/10W		
1620		A1U	RESISTOR		R411	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1621		A1U	RESISTOR		R412	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1622		A1U	RESISTOR		R413	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1623		A1U	RESISTOR		R414	1-216-811-11	METAL CHIP 150 5% 1/10W		
1624		A1U	RESISTOR		R415	1-216-811-11	METAL CHIP 150 5% 1/10W		
1625		A1U	RESISTOR		R416	1-216-811-11	METAL CHIP 150 5% 1/10W		
1626		A1U	RESISTOR		R417	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1627		A1U	RESISTOR		R418	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1628		A1U	RESISTOR		R419	1-216-811-11	METAL CHIP 150 5% 1/10W		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1629		A1U	RESISTOR		R420	1-216-811-11	METAL CHIP 150 5% 1/10W		
1630		A1U	RESISTOR		R421	1-216-811-11	METAL CHIP 150 5% 1/10W		
1631		A1U	RESISTOR		R422	1-216-801-11	METAL CHIP 22 5% 1/10W		
1632		A1U	RESISTOR		R423	1-216-801-11	METAL CHIP 22 5% 1/10W		
1633		A1U	RESISTOR		R424	1-216-801-11	METAL CHIP 22 5% 1/10W		
1634		A1U	RESISTOR		R425	1-216-801-11	METAL CHIP 22 5% 1/10W		
1635		A1U	RESISTOR		R426	1-216-801-11	METAL CHIP 22 5% 1/10W		
1636		A1U	RESISTOR		R427	1-216-801-11	METAL CHIP 22 5% 1/10W		
1637		A1U	RESISTOR		R428	1-216-811-11	METAL CHIP 150 5% 1/10W		
1638		A1U	RESISTOR		R429	1-216-811-11	METAL CHIP 150 5% 1/10W		
1639		A1U	RESISTOR		R430	1-216-811-11	METAL CHIP 150 5% 1/10W		
1640		A1U	RESISTOR		R431	1-216-811-11	METAL CHIP 150 5% 1/10W		
1641		A1U	RESISTOR		R432	1-216-811-11	METAL CHIP 150 5% 1/10W		
1642		A1U	RESISTOR		R433	1-216-811-11	METAL CHIP 150 5% 1/10W		
1643		A1U	RESISTOR		R435	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1644		A1U	RESISTOR		R436	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1645		A1U	RESISTOR		R437	1-216-809-11	METAL CHIP 100 5% 1/10W		
1646		A1U	RESISTOR		R438	1-216-864-11	SHORT CHIP 0		
1647		A1U	RESISTOR		R439	1-216-864-11	SHORT CHIP 0		
1648		A1U	RESISTOR		R440	1-216-864-11	SHORT CHIP 0		
1649		A1U	RESISTOR		R441	1-216-864-11	SHORT CHIP 0		
1650		A1U	RESISTOR		R442	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1651		A1U	RESISTOR		R443	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1652		A1U	RESISTOR		R444	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1653		A1U	RESISTOR		R446	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1654		A1U	RESISTOR		R447	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1655		A1U	RESISTOR		R448	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1656		A1U	RESISTOR		R449	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1657		A1U	RESISTOR		R450	1-216-809-11	METAL CHIP 100 5% 1/10W		
1658		A1U	RESISTOR		R451	1-216-809-11	METAL CHIP 100 5% 1/10W		
1659		A1U	RESISTOR		R452	1-216-809-11	METAL CHIP 100 5% 1/10W		
1660		A1U	RESISTOR		R453	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1661		A1U	RESISTOR		R454	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
1662		A1U	RESISTOR		R455	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
1663		A1U	RESISTOR		R456	1-216-041-00	RES-CHIP 470 5% 1/10W		
1664		A1U	RESISTOR		R457	1-216-806-11	METAL CHIP 56 5% 1/10W		
1665		A1U	RESISTOR		R458	1-216-806-11	METAL CHIP 56 5% 1/10W		
1666		A1U	RESISTOR		R459	1-216-806-11	METAL CHIP 56 5% 1/10W		
1667		A1U	RESISTOR		R460	1-216-861-11	METAL CHIP 2.2M 5% 1/10W		
1668		A1U	RESISTOR		R461	1-216-861-11	METAL CHIP 2.2M 5% 1/10W		
1669		A1U	RESISTOR		R462	1-216-809-11	METAL CHIP 100 5% 1/10W		
1670		A1U	RESISTOR		R463	1-216-809-11	METAL CHIP 100 5% 1/10W		
1671		A1U	RESISTOR		R464	1-216-809-11	METAL CHIP 100 5% 1/10W		
1672		A1U	RESISTOR		R465	1-216-809-11	METAL CHIP 100 5% 1/10W		
1673		A1U	RESISTOR		R466	1-216-809-11	METAL CHIP 100 5% 1/10W		
1674		A1U	RESISTOR		R468	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1675		A1U	RESISTOR		R469	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1676		A1U	RESISTOR		R471	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1677		A1U	RESISTOR		R472	1-216-815-11	METAL CHIP 330 5% 1/10W		
1678		A1U	RESISTOR		R473	1-216-809-11	METAL CHIP 100 5% 1/10W		
1679		A1U	RESISTOR		R475	1-216-809-11	METAL CHIP 100 5% 1/10W		
1680		A1U	RESISTOR		R479	1-216-864-11	SHORT CHIP 0		
1681		A1U	RESISTOR		R486	1-216-861-11	METAL CHIP 2.2M 5% 1/10W		
1682		A1U	RESISTOR		R490	1-216-864-11	SHORT CHIP 0		
1683		A1U	RESISTOR		R491	1-216-809-11	METAL CHIP 100 5% 1/10W		
1684		A1U	RESISTOR		R492	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1685		A1U	RESISTOR		R493	1-216-809-11	METAL CHIP 100 5% 1/10W		
1686		A1U	RESISTOR		R501	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1687		A1U	RESISTOR		R502	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1688		A1U	RESISTOR		R503	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1689		A1U	RESISTOR		R504	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1690		A1U	RESISTOR		R505	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1691		A1U	RESISTOR		R506	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1692		A1U	RESISTOR		R509	1-216-809-11	METAL CHIP 100 5% 1/10W		
1693		A1U	RESISTOR		R510	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1694		A1U	RESISTOR		R511	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1695		A1U	RESISTOR		R512	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1696		A1U	RESISTOR		R513	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1697		A1U	RESISTOR		R514	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1698		A1U	RESISTOR		R515	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1699		A1U	RESISTOR		R522	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1700		A1U	RESISTOR		R523	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1701		A1U	RESISTOR		R524	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1702		A1U	RESISTOR		R527	1-216-805-11	METAL CHIP 47 5% 1/10W		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1703		A1U	RESISTOR		R528	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1704		A1U	RESISTOR		R529	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1705		A1U	RESISTOR		R533	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1706		A1U	RESISTOR		R534	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1707		A1U	RESISTOR		R535	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1708		A1U	RESISTOR		R536	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1709		A1U	RESISTOR		R537	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1710		A1U	RESISTOR		R538	1-216-864-11	SHORT CHIP 0		
1711		A1U	RESISTOR		R539	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1712		A1U	RESISTOR		R540	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1713		A1U	RESISTOR		R541	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1714		A1U	RESISTOR		R542	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1715		A1U	RESISTOR		R543	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1716		A1U	RESISTOR		R544	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1717		A1U	RESISTOR		R545	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1718		A1U	RESISTOR		R547	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1719		A1U	RESISTOR		R548	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1720		A1U	RESISTOR		R549	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1721		A1U	RESISTOR		R550	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1722		A1U	RESISTOR		R553	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1723		A1U	RESISTOR		R556	1-216-836-11	METAL CHIP 18K 5% 1/10W		
1724		A1U	RESISTOR		R558	1-216-805-11	METAL CHIP 47 5% 1/10W		
1725		A1U	RESISTOR		R559	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1726		A1U	RESISTOR		R562	1-220-397-11	METAL CHIP 4.7M 5% 1/10W		
1727		A1U	RESISTOR		R563	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1728		A1U	RESISTOR		R564	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1729		A1U	RESISTOR		R565	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1730		A1U	RESISTOR		R566	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1731		A1U	RESISTOR		R567	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1732		A1U	RESISTOR		R568	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1733		A1U	RESISTOR		R569	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1734		A1U	RESISTOR		R570	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1735		A1U	RESISTOR		R571	1-218-827-11	METAL CHIP 150 0.5% 1/10W		
1736		A1U	RESISTOR		R572	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1737		A1U	RESISTOR		R573	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1738		A1U	RESISTOR		R574	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1739		A1U	RESISTOR		R575	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1740		A1U	RESISTOR		R576	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1741		A1U	RESISTOR		R577	1-218-827-11	METAL CHIP 150 0.5% 1/10W		
1742		A1U	RESISTOR		R578	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1743		A1U	RESISTOR		R579	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1744		A1U	RESISTOR		R580	1-216-805-11	METAL CHIP 47 5% 1/10W		
1745		A1U	RESISTOR		R581	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1746		A1U	RESISTOR		R582	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1747		A1U	RESISTOR		R583	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1748		A1U	RESISTOR		R584	1-220-397-11	METAL CHIP 4.7M 5% 1/10W		
1749		A1U	RESISTOR		R585	1-216-805-11	METAL CHIP 47 5% 1/10W		
1750		A1U	RESISTOR		R586	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1751		A1U	RESISTOR		R587	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1752		A1U	RESISTOR		R588	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1753		A1U	RESISTOR		R589	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1754		A1U	RESISTOR		R590	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1755		A1U	RESISTOR		R591	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1756		A1U	RESISTOR		R592	1-216-805-11	METAL CHIP 47 5% 1/10W		
1757		A1U	RESISTOR		R593	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1758		A1U	RESISTOR		R594	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1759		A1U	RESISTOR		R595	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1760		A1U	RESISTOR		R596	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1761		A1U	RESISTOR		R597	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1762		A1U	RESISTOR		R598	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1763		A1U	RESISTOR		R599	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1764		A1U	RESISTOR		R601	1-216-809-11	METAL CHIP 100 5% 1/10W		
1765		A1U	RESISTOR		R603	1-216-805-11	METAL CHIP 47 5% 1/10W		
1766		A1U	RESISTOR		R604	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1767		A1U	RESISTOR		R605	1-216-809-11	METAL CHIP 100 5% 1/10W		
1768		A1U	RESISTOR		R606	1-216-809-11	METAL CHIP 100 5% 1/10W		
1769		A1U	RESISTOR		R607	1-216-809-11	METAL CHIP 100 5% 1/10W		
1770		A1U	RESISTOR		R608	1-216-809-11	METAL CHIP 100 5% 1/10W		
1771		A1U	RESISTOR		R609	1-216-813-11	METAL CHIP 220 5% 1/10W		
1772		A1U	RESISTOR		R610	1-216-805-11	METAL CHIP 47 5% 1/10W		
1773		A1U	RESISTOR		R612	1-216-813-11	METAL CHIP 220 5% 1/10W		
1774		A1U	RESISTOR		R613	1-216-864-11	SHORT CHIP 0		
1775		A1U	RESISTOR		R614	1-216-864-11	SHORT CHIP 0		
1776		A1U	RESISTOR		R615	1-414-760-21	FERRITE 0UH		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1777		A1U	RESISTOR		R616	1-216-864-11	SHORT CHIP 0		
1778		A1U	RESISTOR		R617	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1779		A1U	RESISTOR		R618	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1780		A1U	RESISTOR		R619	1-216-864-11	SHORT CHIP 0		
1781		A1U	RESISTOR		R621	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1782		A1U	RESISTOR		R622	1-216-864-11	SHORT CHIP 0		
1783		A1U	RESISTOR		R623	1-216-805-11	METAL CHIP 47 5% 1/10W		
1784		A1U	RESISTOR		R624	1-216-809-11	METAL CHIP 100 5% 1/10W		
1785		A1U	RESISTOR		R625	1-216-809-11	METAL CHIP 100 5% 1/10W		
1786		A1U	RESISTOR		R626	1-216-809-11	METAL CHIP 100 5% 1/10W		
1787		A1U	RESISTOR		R628	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1788		A1U	RESISTOR		R630	1-216-830-11	METAL CHIP 5.6K 5% 1/10W		
1789		A1U	RESISTOR		R631	1-216-830-11	METAL CHIP 5.6K 5% 1/10W		
1790		A1U	RESISTOR		R632	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1791		A1U	RESISTOR		R637	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1792		A1U	RESISTOR		R638	1-216-835-11	METAL CHIP 15K 5% 1/10W		
1793		A1U	RESISTOR		R639	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1794		A1U	RESISTOR		R640	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1795		A1U	RESISTOR		R641	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1796		A1U	RESISTOR		R642	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1797		A1U	RESISTOR		R646	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1798		A1U	RESISTOR		R647	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1799		A1U	RESISTOR		R649	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1800		A1U	RESISTOR		R651	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1801		A1U	RESISTOR		R652	1-216-809-11	METAL CHIP 100 5% 1/10W		
1802		A1U	RESISTOR		R654	1-216-838-11	METAL CHIP 27K 5% 1/10W		
1803		A1U	RESISTOR		R656	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1804		A1U	RESISTOR		R659	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1805		A1U	RESISTOR		R662	1-216-809-11	METAL CHIP 100 5% 1/10W		
1806		A1U	RESISTOR		R664	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1807		A1U	RESISTOR		R666	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1808		A1U	RESISTOR		R667	1-216-805-11	METAL CHIP 47 5% 1/10W		
1809		A1U	RESISTOR		R668	1-216-805-11	METAL CHIP 47 5% 1/10W		
1810		A1U	RESISTOR		R669	1-216-805-11	METAL CHIP 47 5% 1/10W		
1811		A1U	RESISTOR		R670	1-216-805-11	METAL CHIP 47 5% 1/10W		
1812		A1U	RESISTOR		R671	1-216-805-11	METAL CHIP 47 5% 1/10W		
1813		A1U	RESISTOR		R672	1-216-805-11	METAL CHIP 47 5% 1/10W		
1814		A1U	RESISTOR		R673	1-216-805-11	METAL CHIP 47 5% 1/10W		
1815		A1U	RESISTOR		R674	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1816		A1U	RESISTOR		R679	1-414-760-21	FERRITE 0UH		
1817		A1U	RESISTOR		R680	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1818		A1U	RESISTOR		R681	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1819		A1U	RESISTOR		R682	1-216-805-11	METAL CHIP 47 5% 1/10W		
1820		A1U	RESISTOR		R683	1-216-805-11	METAL CHIP 47 5% 1/10W		
1821		A1U	RESISTOR		R684	1-216-807-11	METAL CHIP 68 5% 1/10W		
1822		A1U	RESISTOR		R685	1-216-807-11	METAL CHIP 68 5% 1/10W		
1823		A1U	RESISTOR		R686	1-216-809-11	METAL CHIP 100 5% 1/10W		
1824		A1U	RESISTOR		R687	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1825		A1U	RESISTOR		R688	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1826		A1U	RESISTOR		R689	1-216-817-11	METAL CHIP 470 5% 1/10W		
1827		A1U	RESISTOR		R694	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1828		A1U	NETWORK		RB501	1-234-372-21	RES, NETWORK 100 (1005X4)		
1829		A1U	NETWORK		RB502	1-234-372-21	RES, NETWORK 100 (1005X4)		
1830		A1U	NETWORK		RB503	1-234-372-21	RES, NETWORK 100 (1005X4)		
1831		A1U	NETWORK		RB504	1-234-372-21	RES, NETWORK 100 (1005X4)		
1832		A1U	NETWORK		RB505	1-234-372-21	RES, NETWORK 100 (1005X4)		
1833		A1U	NETWORK		RB506	1-234-372-21	RES, NETWORK 100 (1005X4)		
1834		A1U	TRANSFORMER		T501	1-437-982-11	SOUND INPUT TRANSFORMER		
1835		A1U	CHIP CHCKER		TP001	1-535-877-22	CHIP, CHECKER		
1836		A1U	CHIP CHCKER		TP002	1-535-877-22	CHIP, CHECKER		
1837		A1U	CHIP CHCKER		TP003	1-535-877-22	CHIP, CHECKER		
1838		A1U	CHIP CHCKER		TP301	1-535-757-11	CHIP, CHECKER		
1839		A1U	CHIP CHCKER		TP302	1-535-757-11	CHIP, CHECKER		
1840		A1U	CHIP CHCKER		TP303	1-535-757-11	CHIP, CHECKER		
1841		A1U	CHIP CHCKER		TP304	1-535-757-11	CHIP, CHECKER		
1842		A1U	CHIP CHCKER		TP305	1-535-757-11	CHIP, CHECKER		
1843		A1U	CHIP CHCKER		TP308	1-535-757-11	CHIP, CHECKER		
1844		A1U	CHIP CHCKER		TP501	1-535-757-11	CHIP, CHECKER		
1845		A1U	CHIP CHCKER		TP502	1-535-757-11	CHIP, CHECKER		
1846		A1U	CHIP CHCKER		TP503	1-535-757-11	CHIP, CHECKER		
1847		A1U	CHIP CHCKER		TP504	1-535-757-11	CHIP, CHECKER		
1848		A1U	CHIP CHCKER		TP505	1-535-757-11	CHIP, CHECKER		
1849		A1U	CHIP CHCKER		TP506	1-535-757-11	CHIP, CHECKER		
1850		A1U	CHIP CHCKER		TP507	1-535-757-11	CHIP, CHECKER		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1851		A1U	VARISTOR		VD301	1-803-974-21	VARISTOR, CHIP (1608)		
1852		A1U	VARISTOR		VD302	1-803-974-21	VARISTOR, CHIP (1608)		
1853		A1U	VARISTOR		VD303	1-803-974-21	VARISTOR, CHIP (1608)		
1854		A1U	VARISTOR		VD332	1-803-974-21	VARISTOR, CHIP (1608)		
1855		A1U	VARISTOR		VD333	1-803-974-21	VARISTOR, CHIP (1608)		
1856		A1U	VARISTOR		VD334	1-803-974-21	VARISTOR, CHIP (1608)		
1857		A1U	VARISTOR		VD335	1-803-974-21	VARISTOR, CHIP (1608)		
1858		A1U	VARISTOR		VD336	1-803-974-21	VARISTOR, CHIP (1608)		
1859		A1U	VARISTOR		VD337	1-803-974-21	VARISTOR, CHIP (1608)		
1860		A1U	VARISTOR		VD338	1-803-974-21	VARISTOR, CHIP (1608)		
1861		A1U	VARISTOR		VD339	1-803-974-21	VARISTOR, CHIP (1608)		
1862		A1U	VARISTOR		VD340	1-803-974-21	VARISTOR, CHIP (1608)		
1863		A1U	VARISTOR		VD403	1-803-974-21	VARISTOR, CHIP (1608)		
1864		A1U	VARISTOR		VD404	1-803-974-21	VARISTOR, CHIP (1608)		
1865		A1U	VARISTOR		VD405	1-803-974-21	VARISTOR, CHIP (1608)		
1866		A1U	VARISTOR		VD406	1-803-974-21	VARISTOR, CHIP (1608)		
1867		A1U	VARISTOR		VD407	1-803-974-21	VARISTOR, CHIP (1608)		
1868		A1U	VARISTOR		VD408	1-803-974-21	VARISTOR, CHIP (1608)		
1869		A1U	VARISTOR		VD409	1-803-974-21	VARISTOR, CHIP (1608)		
1870		A1U	VARISTOR		VD410	1-803-974-21	VARISTOR, CHIP (1608)		
1871		A1U	VARISTOR		VD411	1-803-974-21	VARISTOR, CHIP (1608)		
1872		A1U	VARISTOR		VD412	1-803-974-21	VARISTOR, CHIP (1608)		
1873		A1U	VARISTOR		VD413	1-803-974-21	VARISTOR, CHIP (1608)		
1874		A1U	VARISTOR		VD414	1-803-974-21	VARISTOR, CHIP (1608)		
1875		A1U	VARISTOR		VD415	1-803-974-21	VARISTOR, CHIP (1608)		
1876		A1U	VARISTOR		VD416	1-803-974-21	VARISTOR, CHIP (1608)		
1877		A1U	VARISTOR		VD417	1-803-974-21	VARISTOR, CHIP (1608)		
1878		A1U	VARISTOR		VD418	1-803-974-21	VARISTOR, CHIP (1608)		
1879		A1U	VARISTOR		VD419	1-803-974-21	VARISTOR, CHIP (1608)		
1880		A1U	VARISTOR		VD420	1-803-974-21	VARISTOR, CHIP (1608)		
1881		A1U	VARISTOR		VD421	1-803-974-21	VARISTOR, CHIP (1608)		
1882		A1U	VARISTOR		VD422	1-803-974-21	VARISTOR, CHIP (1608)		
1883		A1U	VARISTOR		VD423	1-803-974-21	VARISTOR, CHIP (1608)		
1884		A1U	VARISTOR		VD424	1-803-974-21	VARISTOR, CHIP (1608)		
1885		A1U	VARISTOR		VD425	1-803-974-21	VARISTOR, CHIP (1608)		
1886		A1U	VARISTOR		VD426	1-803-974-21	VARISTOR, CHIP (1608)		
1887		A1U	VARISTOR		VD512	1-803-974-21	VARISTOR, CHIP (1608)		
1888		A1U	VARISTOR		VD513	1-803-974-21	VARISTOR, CHIP (1608)		
1889		A1U	VARISTOR		VD514	1-803-974-21	VARISTOR, CHIP (1608)		
1890		A1U	VARISTOR		VD515	1-803-974-21	VARISTOR, CHIP (1608)		
1891		A1U	CRYSTAL		X302	1-781-922-21	VIBRATOR, CERAMIC		
1892		A1U	CRYSTAL		X501	1-795-980-21	VIBRATOR, CRYSTAL		

