


April, 1977/75 cents

BROADCAST engineering

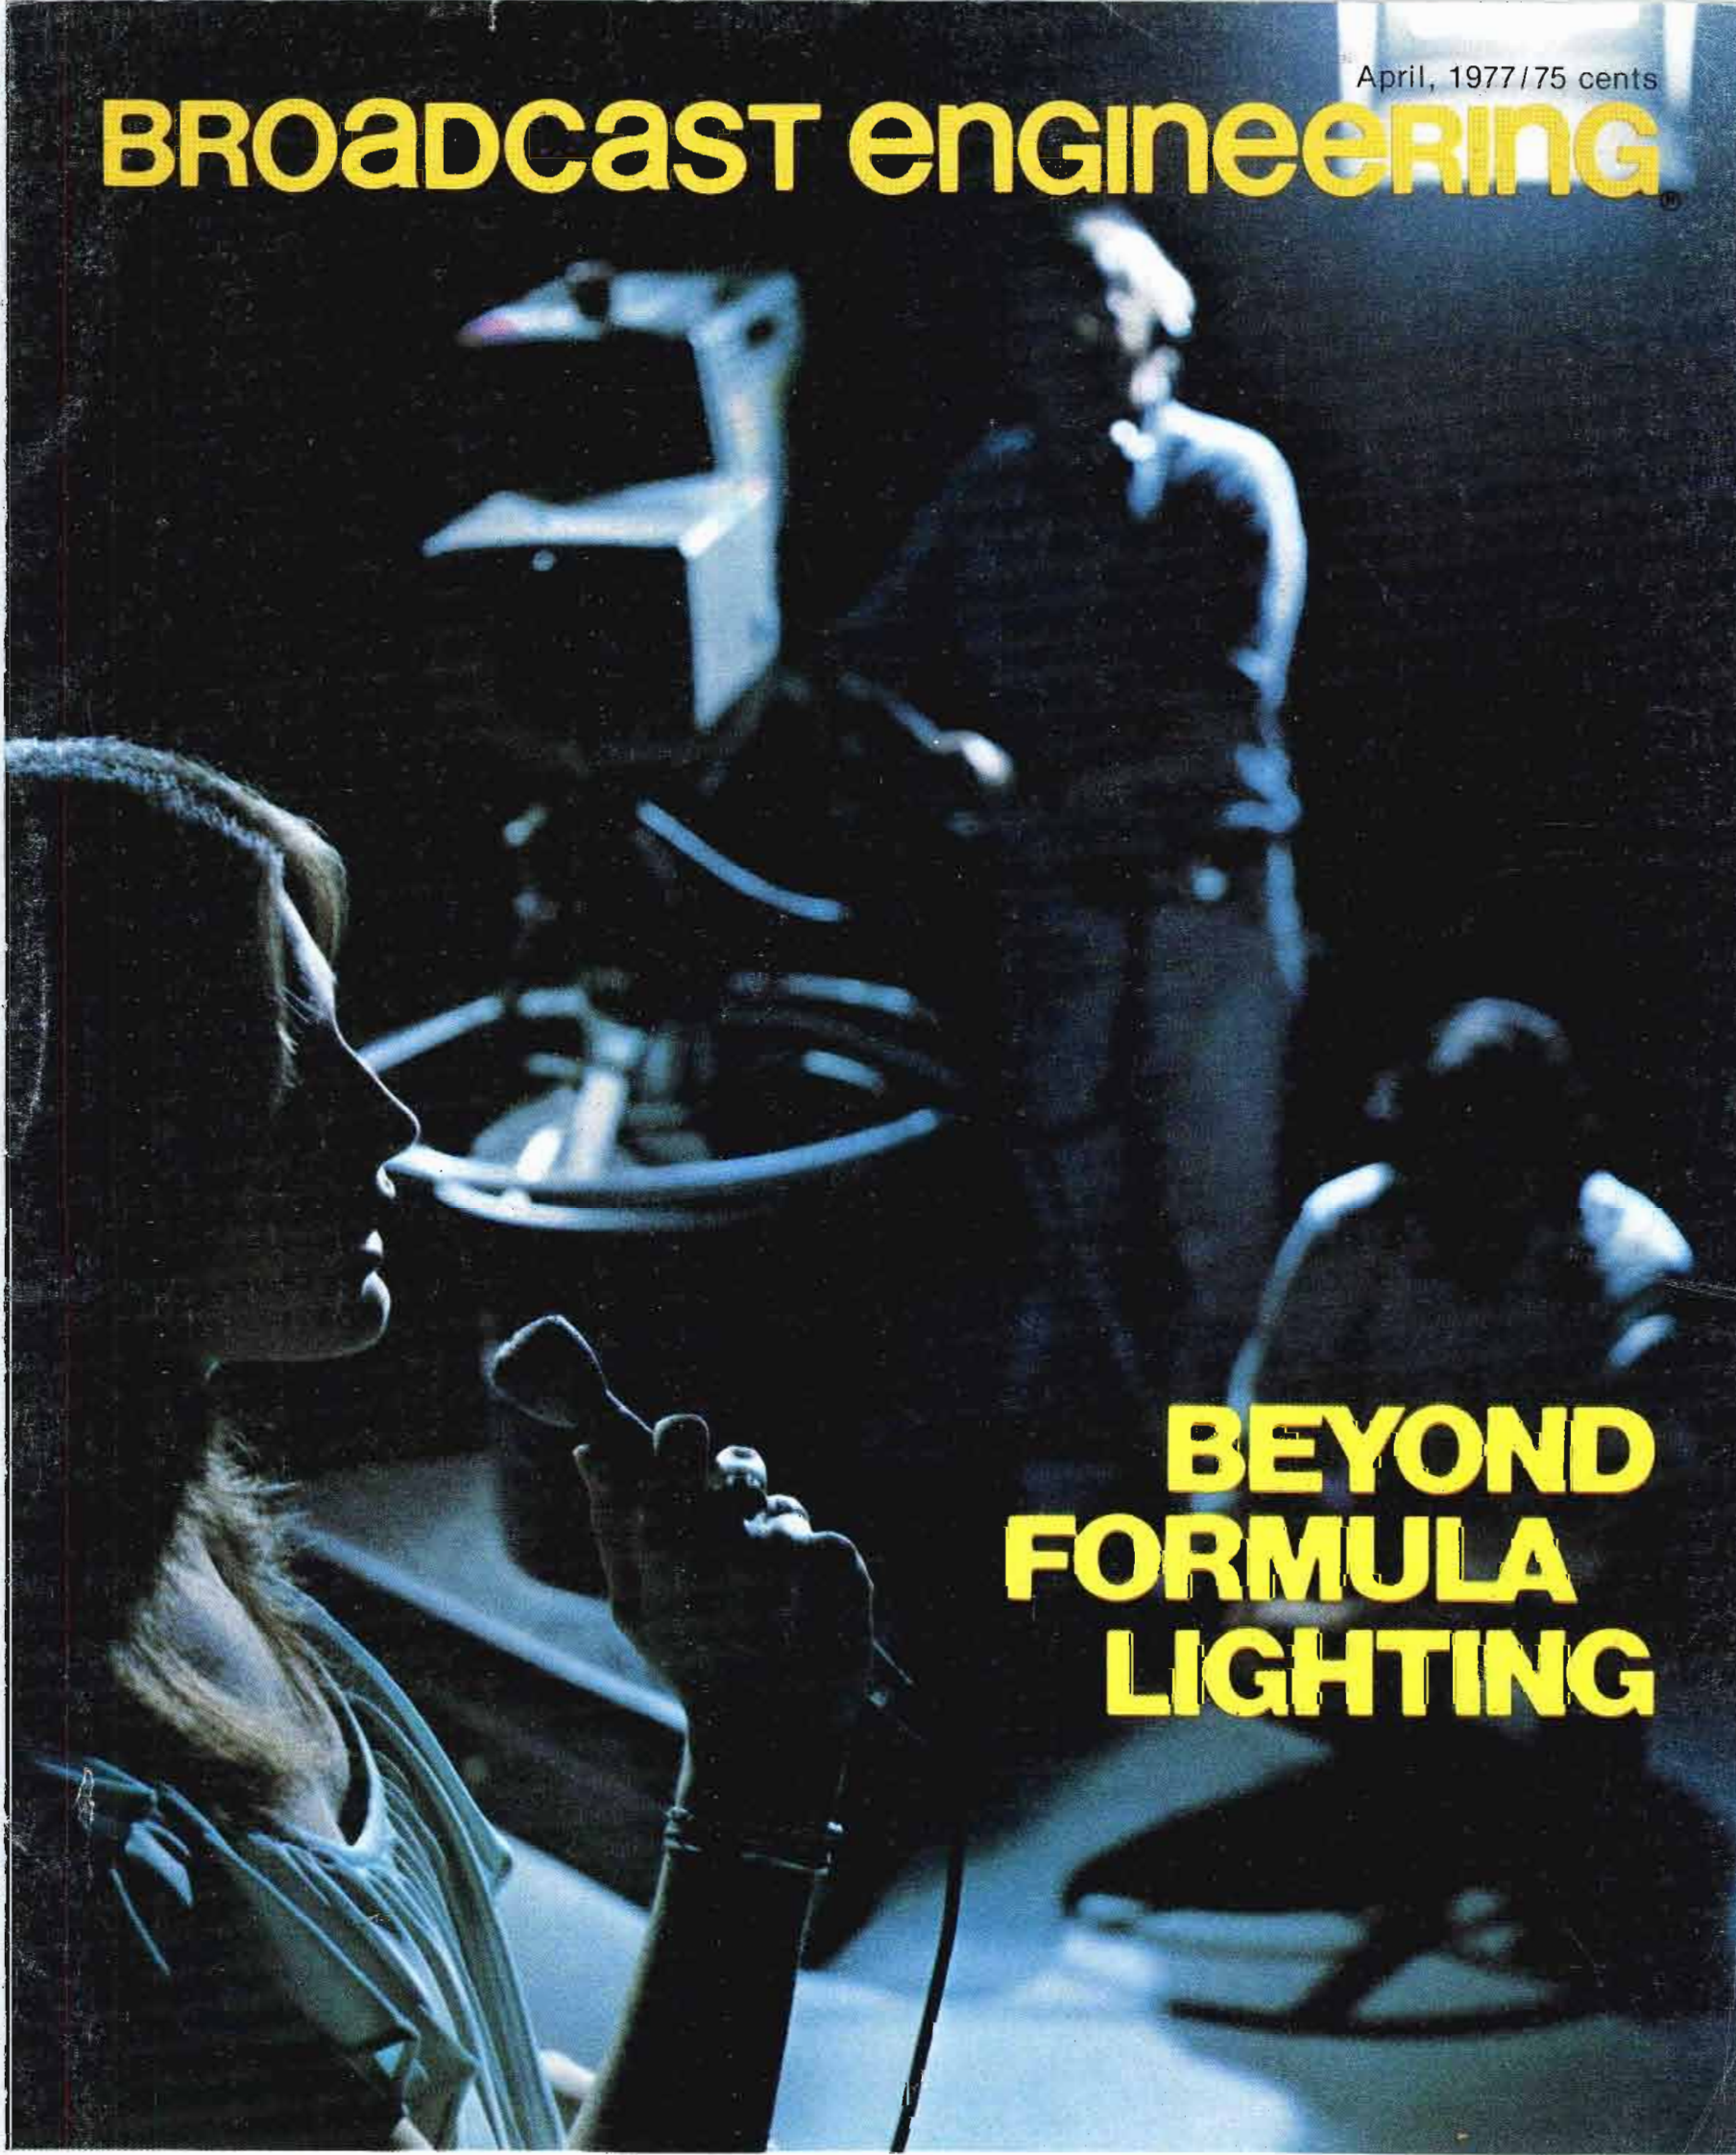

BEYOND FORMULA LIGHTING

3676 N DNC 577 X
GLENN C PETERSEN
~~XXXXXXXXXX~~

*Directional Antennas
RENG: RPU Roundup
Synchronizer Review*

the McCurdy package

The McCurdy Package offers exceptional user flexibility. Individual components are designed to integrate and expand in accordance with future needs.

Our systems engineering is backed by 28 years of experience in building quality equipment for the country's leading stations.


SS8400 mono package



McCURDY RADIO INDUSTRIES INCORPORATED, 1051 CLINTON STREET, BUFFALO, NEW YORK 14206 (716) 854-6700 TWX 610-492-3219
 McCURDY RADIO INDUSTRIES INCORPORATED, SADDLE RIVER, NEW JERSEY P.O. BOX 86, 07458 (201) 327-0750 TWX 610-492-3219
 McCURDY RADIO INDUSTRIES LIMITED, 108 CARNFORTH ROAD, TORONTO, ONTARIO, CANADA M4A 2L4 (416) 751-6262 TELEX 06-963533

For More Details Circle (1) on Reply Card

At Last, a Cart Machine that keeps its cool

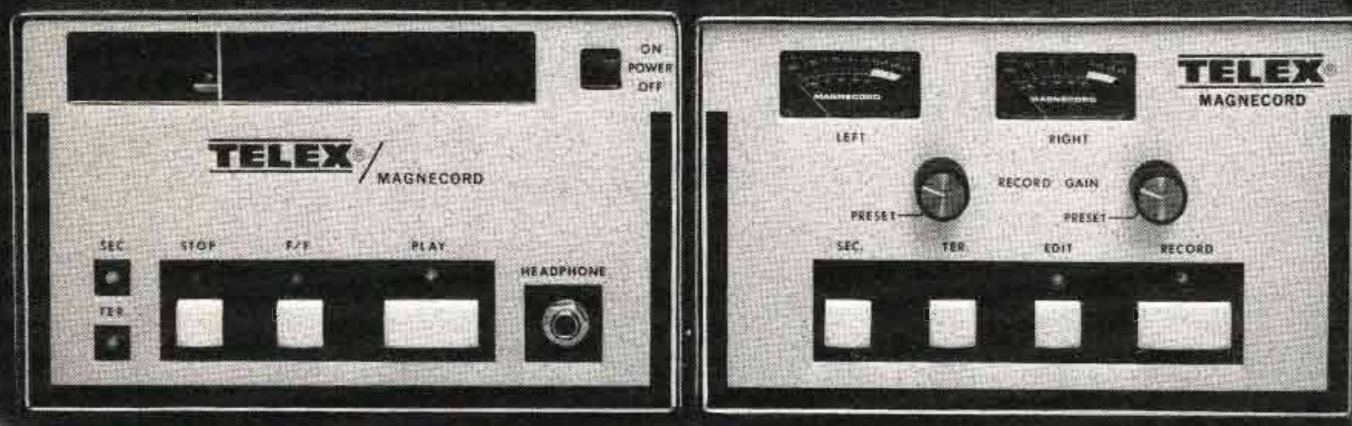

Telex/Magnecord broadcast cart machines run cool and steady. So cool no ventilation is required, so steady not even voltage or frequency fluctuations will alter their speed. Thanks to our dc servo flutter-filter drive.

The MC series offers broadcasters a host of options, including field convertability from mono to stereo or play to record and, of course, end of message, secondary/tertiary cue tones.

Designed for type A or B carts, the MC

series meets all NAB specifications, offers full immunity to EMI and RFI, is remote controllable and automation compatible with CMOS digital logic. Audio muting, air damped low voltage dc solenoid and fast forward are standard features on every MC unit.

Eight broadcast cart machines to choose from in the Telex/Magnecord MC series. Running cool and steady. With a pleasant surprise—they're affordable.

For detailed information please write:

PRODUCTS OF SOUND RESEARCH
TELEX
COMMUNICATIONS, INC.

9600 ALDRICH AVE. SO. • MINNEAPOLIS, MINN. 55420 U.S.A.
Europe: 22 rue de la Legion-d'honneur, 93200 St. Denis, France
Canada: Telak Electronics, Ltd., Scarborough, Ontario

For More Details Circle (4) on Reply Card

- 14 Beyond Formula Lighting.** Our Production Spotlight Editor covers lighting situations that demand special consideration. Examples for no-shadow close-ups and hidden-face interviews are included. *Ron Whittaker.*
- 24 RENG: RPU Roundup.** The Radio Workshop this month covers side-by-side specs and prices for radio electronic news gathering RPU UHF and VHF transmitters and receivers. *Peter Burk and Peggy Brown.*
- 30 Directional Antenna Basics.** Part 2 of this series includes vector calculations, power computations, and basic pattern concepts. Part 2 is based on a two-tower system. *Robert Jones.*
- 40 Digital Framestore Synchronizer Review.** Written before the convention, this review tells how the state-of-the-art units work, how they are used, and who makes them. Explains how they were used during the Olympics to solve some very real sports coverage headaches. *Joe Roizen.*

About the cover

The challenge of lighting for unusual effects and for hard to shoot scenes begins on the cover and continues on page 14. Cover photo by Ron Whittaker.

Departments

Direct Current	4
Industry News	8
People In The News	50
SBE Journal	52
Zoom In	54
New Products	58
Classified Ads	62
Ad Index	62

Editorial, advertising and circulation correspondence should be addressed to: 9221 Quivira Road, P.O. Box 12901, Overland Park, Kansas 66212 (a suburb of Kansas City, Missouri). (913) 888-4664.

Editorial

Ronald N. Merrell, *Editorial Director*
Carl Babcoke, *Technical*
Ron Whittaker, *Production Spotlight*
Howard T. Head, *FCC Rules*
Robert A. Jones, *Facilities*
Peggy Brown, *Editorial Assistant*
Dudley Rose, *Graphic Designer*
Joe Roizen, *Video*
Peter Burk, *Radio Workshop*
Dennis Ciapura, *Audio Editor*

CIRCULATION

Greg Garrison, *Director*
Evelyn Rogers, *Manager*



Member, American Business Press



Member, Business Publications Audit of Circulation

ADMINISTRATION

George H. Seferovich, *President*
Mike Kreiter, *Publisher*

ADVERTISING SALES

Gloria Parmenter, *Production*
P.O. Box 12901
Overland Park, KS 66212
(913) 888-4664
Regional advertising sales offices listed on ad index page.

BROADCAST ENGINEERING is published monthly by Intertec Publishing Corp., 9221 Quivira Road, Overland Park, Ks. 66212.

BROADCAST ENGINEERING is edited for corporate management, technicians/engineers, and other station management personnel at Commercial and Educational radio and TV stations, Teleproduction studios, recording studios, CATV and CCTV facilities, and government agencies. Qualified persons also include consulting engineers, dealer/distributors of broadcast equipment.

SUBSCRIPTIONS: BROADCAST ENGINEERING is mailed free to qualified persons in occupations described above.

Non-qualified subscriptions in the U.S. are \$6.00 one year, \$10.00 two years, \$13.00 three years. Outside the USA add \$1.00 per year to cover postage. Single copy rate 75 cents. Back issues rate \$1.00. Adjustments necessitated by subscription termination at single copy rate.

Allow 2-3 weeks for new subscriptions.

Allow 4-6 weeks delivery for change of address.

Controlled circulation postage paid at Kansas City, Missouri.


Copyright, 1977, Intertec Publishing Corp. All Rights Reserved: Material may not be reproduced or photocopied in any form without written permission of Publisher.



INTERTEC PUBLISHING CORP.

GRASS VALLEY GROUP
M200

*A new, low-cost, standardized approach
to television switching automation employing
microcomputer technology.*

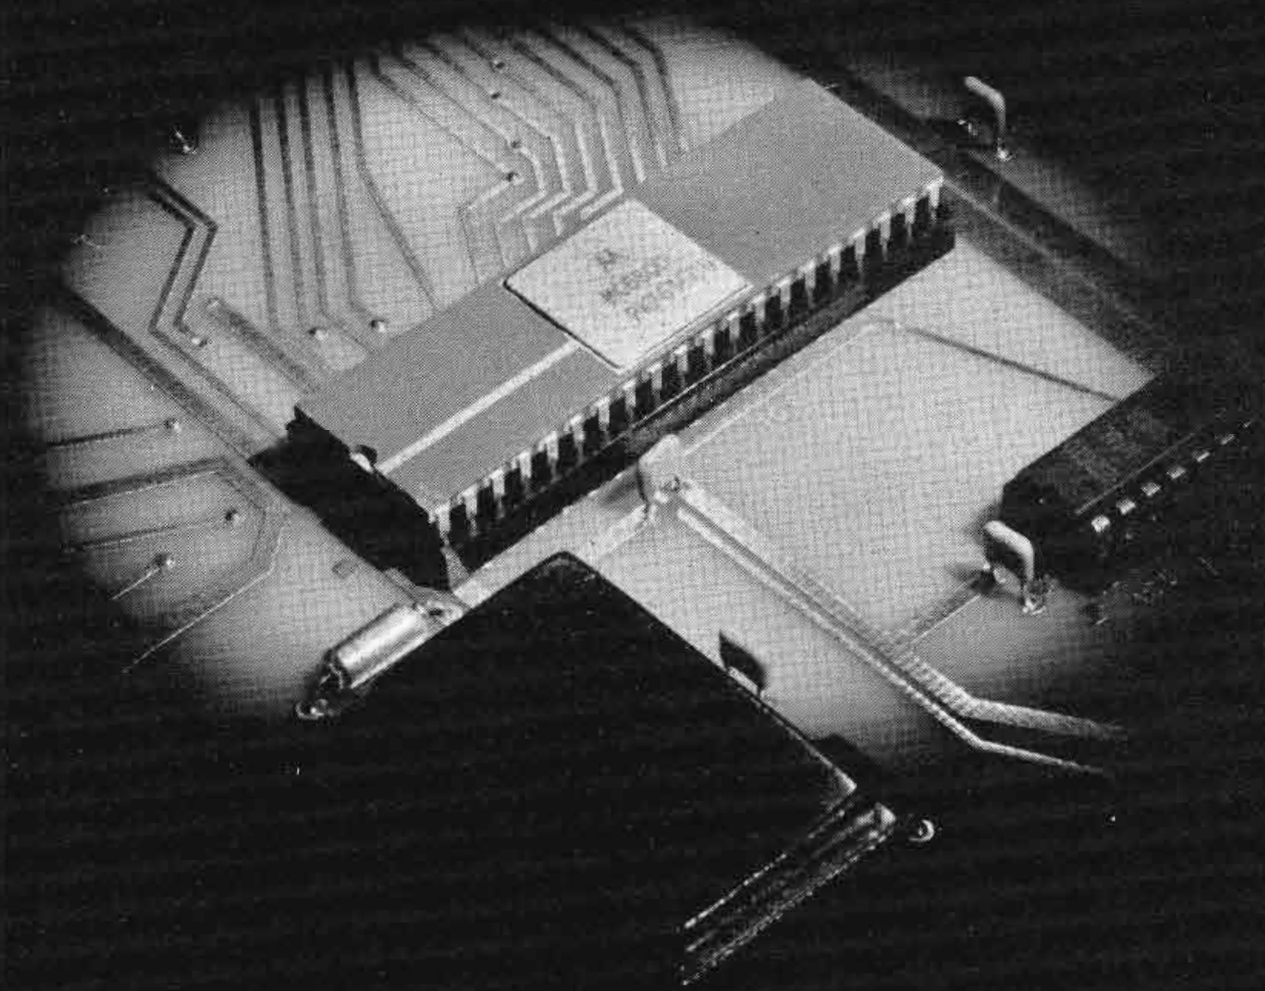

THE GRASS VALLEY GROUP, INC.

A TEKTRONIX COMPANY

Station Plaza East
GREAT NECK, NY 11021
(516) 487-1311


4419 Van Nuys Blvd, Ste 307
SHERMAN OAKS, CA 91403
(213) 990-6172

1644 Tullie Cir, NE
ATLANTA, GA 30329
(404) 634-0521

P.O. Box 482
MABANK, TX 75147
(214) 887-1181

810 W Bristol Street
ELKHART, IN 46514
(219) 264-0931

DIRECT CURRENT FROM D.C.

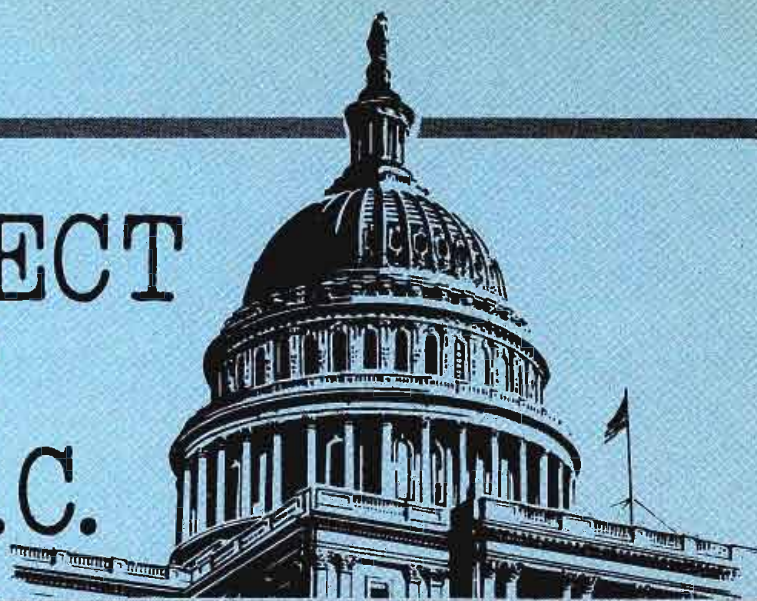

April, 1977/By Howard T. Head and Harold L. Kassens

Canadian Coordination of Remote Pickup Assignments

If you are located near the Canadian border and are having trouble getting remote pickup frequencies approved, it may be because of a long existing but little publicized agreement with Canada which requires across-the-border coordination on all assignments above 30 MHz (except FM and TV which are covered by separate agreements). As far as remote pickup is concerned, the pertinent area is from the border to a line described as follows:

"Begins at Aberdeen, Wash. running by great circle arc to the intersection of 48°N. , 120°W. , thence along parallel 48°N. , to the intersection of 95°W. thence by great circle arc through the southernmost point of Duluth, Minn., thence by great circle arc to 45°N. , 85°W. , thence southward along meridian 85°W. , to its intersection with parallel 41°N. , thence along parallel 41°N. , to its intersection with meridian 82°W. , thence by great circle arc through the southernmost point of Bangor, Me., thence by great circle arc through the southernmost point of Searsport, Me., at which point it terminates."

Each assignment in this zone must be referred to the Canadian Department of Communications for approval. Unfortunately, there are no engineering standards for determining whether or not harmful interference will be caused, so it's a "judgement call". The only recourse we have is a provision which says that if both sides disagree, on-the-air tests observed by representatives of both governments may be run.

What appears to be complicating the situation at present is that the Canadians are using the frequencies for other purposes than we do. Recently, for example, their use of frequencies in the 160 MHz band for expanded maritime mobile purposes on the Great Lakes and Puget Sound has had a substantial impact on our use of this band for remote pickup.

Before you apply for frequencies in this zone, it might be well to check with the FCC about any possible conflicts. A further word of caution. In the new remote pickup rules adopted last summer, provision was made for a simple notification to the

Continued on page 6

CETEC Sparta's new SS1000A is really worth listening to.

For starters, our new AM transmitter produces less than 1% harmonic distortion. Near perfect. Advanced circuitry easily provides 125% modulation. So exclusive we've applied for patents.


☐ One factor we haven't provided is "dead air." Our SS1000A behaves much like a tube type — it simply ignores load variations.

☐ High overall efficiency? In spades. RF systems 90% or better. Remarkably low power consumption. ☐ Another plus. We use two accurate digital meters.

Each assures an automatic "spare" for the other. ☐ *Extras:* no-load, no-tuning broadband combining system. "Tally light" fault locator system and individually replaceable PA and modulation Transistors. ☐ *Interesting fact:* CETEC Sparta is the only manufacturer of both AM and FM solid state transmitters. Enough said? Not quite. ☐ Wouldn't you as a professional broadcaster, prefer to talk to a broadcast professional? . . . about the good group of products from Sparta, Schafer and Jampro.

☐ We're worth listening to.
And—we're delivering.

 **Cetec Broadcast Group**
The Broadcast Divisions of Cetec Corporation
75 Castilian Drive Goleta, California 93017
Telephone: (805) 968-1561

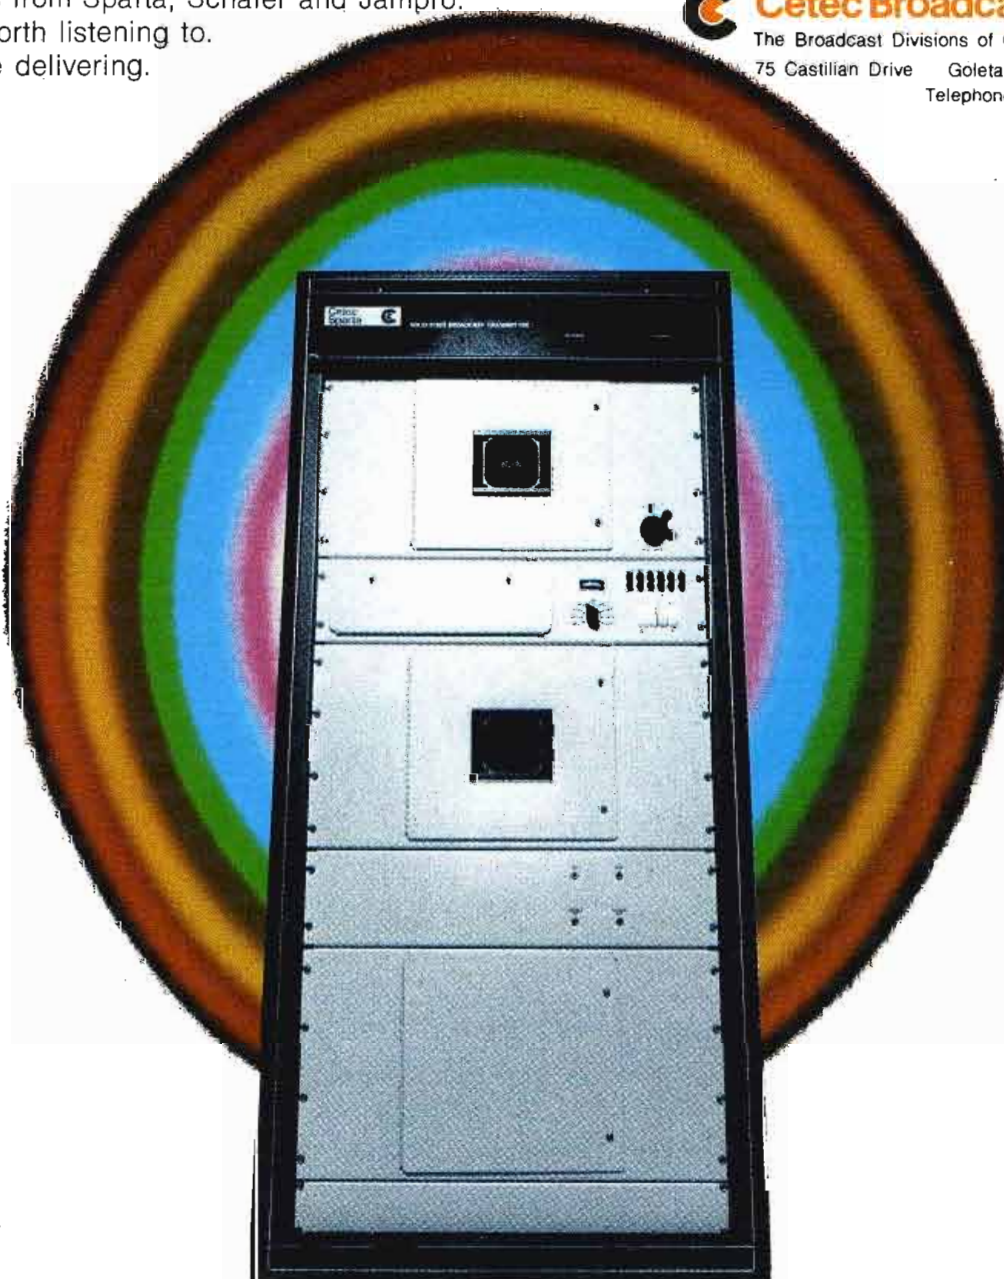

For More Details Circle (5) on Reply Card

DIRECT CURRENT FROM D. C.

Continued from page 4

Commission if you were required to change frequency because your use did not correspond to the new classification (e.g., program relay). This procedure does not apply to the zone south of border described above and the Commission is rushing out a corrective Order.

Antenna Monitor Deadline

Section 73.69 of the FCC rules requires that all AM stations using directional antennas must have a type approved antenna monitor by June 1, 1977. The staff has consulted the manufacturers of these units and has determined that they are available "off the shelf". Consequently, no extension of this June 1 deadline is contemplated. If you don't have one yet, you'd be well served to spring into action. When the new monitor is installed, an informal application must be filed with the FCC in Washington for license modification. It has been discovered that some stations are not doing so.


FM Interference to Hospital Equipment

A hospital in Omaha complained that it was experiencing intermittent interference in certain areas to coronary and general intensive care units, labor and delivery areas, and the EKG unit. It alleged the presence of electrical noise which sometimes causes EKG readings to be illegible; interference with the hospital safety groundcheck routine; the reception of radio signals in ultrasonic monitoring devices and EKG machines; inconsistent readings on the leakage current measuring device; and erroneous readings on current testers. All this because of an FM station with an ERP of 31 kW located across the street. The Commission considered the matter to be very serious and withheld action on a renewal application pending an investigation by its field staff. The result was that the interference complained of was due to a 60 Hertz leakage and was not attributable to the station although the high R.F. field did appear to have some side effect. Also it was determined that the hospital did not install filtering and shielding devices which were available. The Commission then granted the renewal, but held the door open for the hospital to make a stronger case if it wished to do so.

Short Circuits

The FCC has approved the use of wireless microphones on unused upper VHF-TV (7-13) channels by TV stations, motion picture companies, cable systems and other similar organizations...A TV station has filed a rule making petition to permit the use of a subcarrier on the aural carrier for the purpose of cuing and coordinating Electronic News Gathering (RM-2836)...NAB has filed a petition to amend the rules to permit rebroadcast of CB and Amateur transmissions consisting of emergency information, traffic, road or weather conditions, or information vital to public safety and convenience (RM-2830)...The 1977 World Administrative Radio Conference on Broadcast Satellites is over, but it didn't settle much. The allocation of slots in the equatorial orbit for satellites of countries in the Western Hemisphere is held off until 1982.

You want studio quality in your field-produced material.

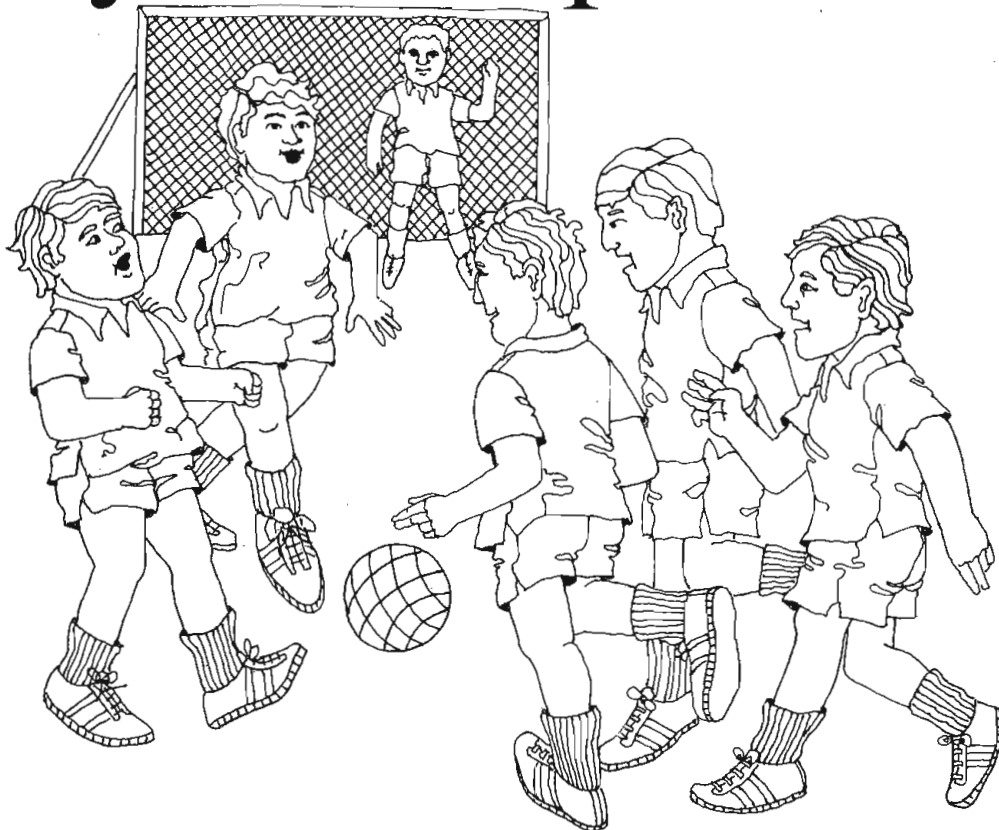

VPR-10 delivers quality.

There's only one way you're going to bring back studio quality tapes from the field: You have to do your recording on a studio-quality VTR. And that's just what the new VPR-10 is. A studio-quality, field production recorder in the Ampex one-inch videotape format.

The new VPR-10 is surprisingly small and lightweight. Small because it was designed for record-only service, to produce all the quality of a VPR-1 recording (tapes are 100% compatible) without the bulk of a studio machine.

What do you get with the self-contained VPR-10? You get color video verification capability. You get automatic assemble editing as you record. You get a full hour of material on one reel of tape. You get power options that let you use


the built-in batteries, or standard line current, or even the accessory

socket in your vehicle. You even get a recharger for the VPR-10 battery pack.

Best of all, you get quality. Pictures from this portable VTR look as good as you'd get by moving a VPR-1 into the field.

VPR-10 from Ampex.

The best studio-quality one-inch recorder ever offered in a portable package. For producers who can't take chances with picture quality, no matter where the action is.

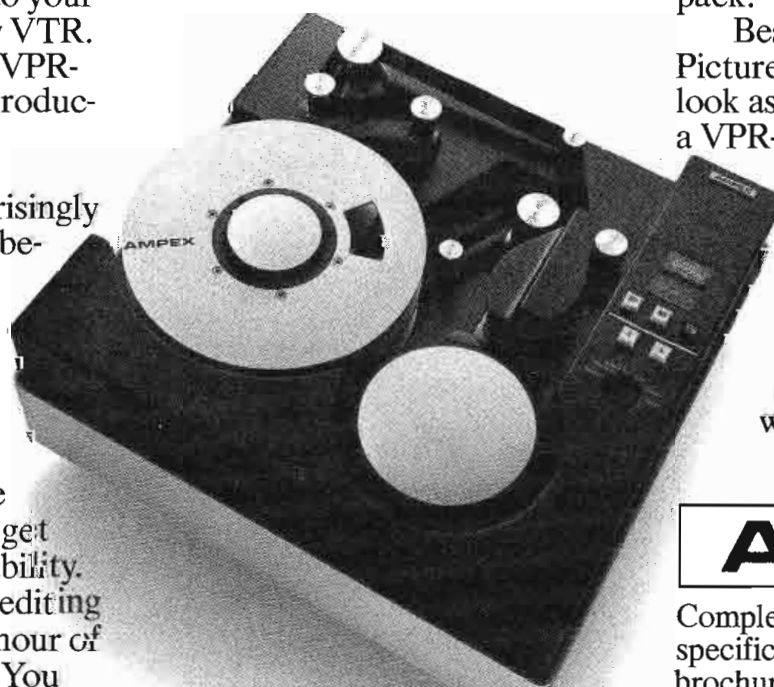

AMPEX

Complete technical and performance specifications are available in a free brochure. Write us at 401 Broadway, Redwood City, California 94063, or call (415) 367-2011.

INDUSTRY NEWS

Spectrum Space Is Needed

The National Association of Broadcasters has told the Federal Communications Commission that adequate spectrum space is a must in order to maintain our free broadcasting, "the best system in the world."

FCC has asked for comments on the use of the International Table of Allocations as it relates to international and domestic needs for spectrum in preparation for the 1979 World Administrative Radio Conference (WARC-1979).

HOW TO PUT A PROFESSIONAL STEREO RECORDER TO WORK IN YOUR STUDIO FOR ONLY \$76.65 A MONTH



Lease a 750 Series Stereo Recorder/Reproducer from International Tapetronics. Pay for your equipment as it pays for itself. Mono Recorders available at only \$66.50 a month.

Give us a call on our Toll-Free number and we'll tell you all about our three-year warranty, standard with all leases.

800-447-0414 TOLL-FREE

309-828-1381 COLLECT in Alaska, Hawaii and Illinois



INTERNATIONAL TAPETRONICS CORPORATION
2425 SOUTH MAIN STREET • BLOOMINGTON, ILLINOIS 61701

Marketed exclusively in Canada by McCurdy
Radio Industries Ltd., Toronto

The WARC-1979 will determine how the entire spectrum used for communications will be divided until the year 2000. NAB, recognizing the importance of such a decision to broadcasters, filed extensive comments on spectrum needs of AM/FM radio and UHF television.

On AM radio, the Association warned against the dangers of reducing channel space to provide additional frequencies for other services. Tampering with channel space leads to interference, adverse effects on directional antennas, AM stereo and receiver design, NAB argued. "A reduction in channel spacing would impose severe technical and financial hardships upon broadcasters by necessitating the purchase of new equipment and conversion of existing equipment which would probably be too costly for marginal radio licensees to undertake," NAB said. Requests for additional AM facilities can be met by expanding the present AM broadcast band the Association suggested.

On Auxiliary Broadcast Service, which licenses remote pickup facilities, NAB argued that broadcasters need all the space they have. In fact, the Association said, there is a distinct scarcity of space for such services, and the entire 972-952 MHz band should be allocated to provide needed channels.

On FM radio, NAB agreed with FCC's proposal that spectrum allocation remain as it is.


Commenting on UHF television, NAB pointed to all the benefits provided to the public through both UHF and VHF television. Any plan, NAB warned, to decrease the number of UHF and VHF frequencies now allocated would mean a reduction in such services as news; public service announcements; critical emergency information during floods, fires, etc.; and valuable consumer information.

In addition, NAB pushed for restoration to UHF television part of the spectrum now shared with land mobile services. NAB also noted the importance of UHF translators for providing television service to sparsely settled, remote areas and said space for translators must be maintained.

Continued on page 10


A NEW addition to the FAMILY

Model AD-5980A Audio Distribution Amplifier

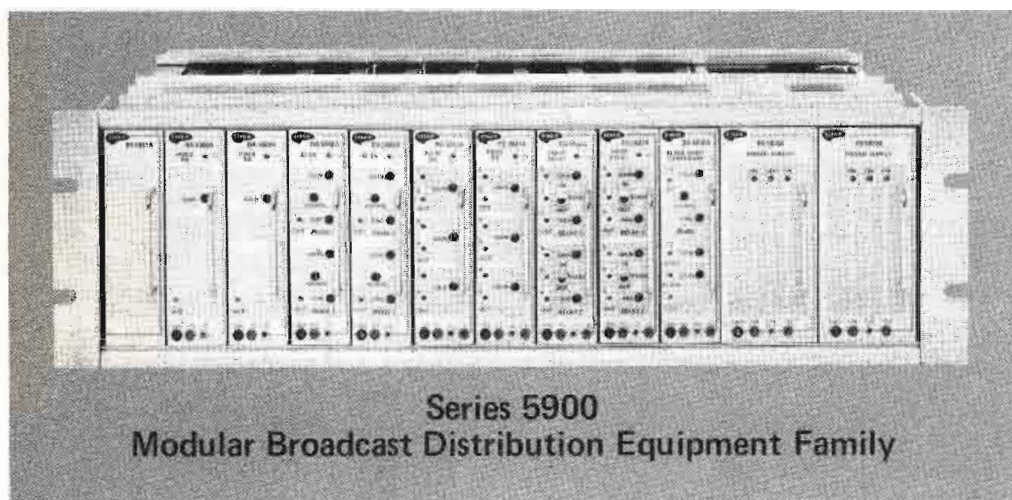

MEET SOME OF THE RELATIVES

- **DA-5960A Video Distribution Amplifier** module provides six DC coupled outputs from one differential high-impedance looping input. Frequency response flat ± 0.1 dB to 10 MHz, less than 0.1° differential phase and 0.2% differential gain.
- **DA-5966A Sub-Carrier Distribution Amplifier** module, provides regeneration and distribution of NTSC or PAL sub-carrier through six DC coupled outputs from one high-impedance looping input. Outputs are divided into two groups of three with independent phase and level front panel controls for each group. Phase is adjustable over a 0 to 360° range.
- **PD-5941A Regenerative Pulse Distribution Amplifier** module provides six DC coupled outputs from one high-impedance looping input. Outputs divided into three groups of two outputs with independent level controls for each group.
- **PD-5942A Regenerative Pulse Delay Distribution Amplifier** module provides six DC coupled outputs from one high-impedance looping input. Delay is adjustable over 0.35 to 4 microsecond range. Outputs are divided into two groups of three with independent delay and level front panel controls for each group.

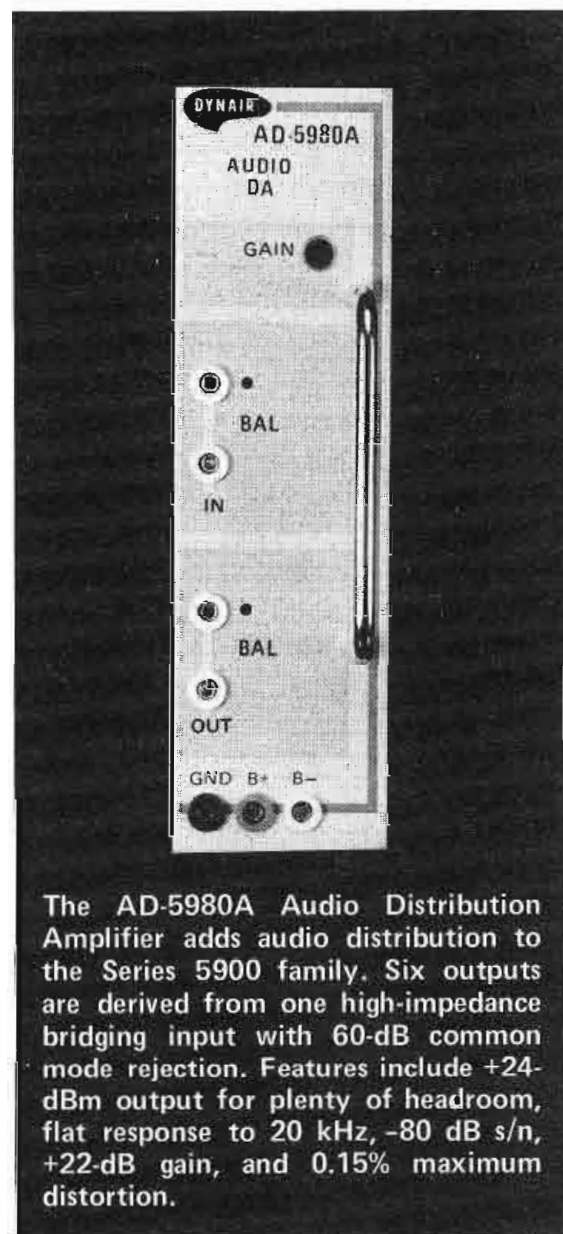

The DYNAIR Series 5900 Modular Broadcast Distribution equipment is state-of-the-art in design, tops in reliability, and offers performance expected by the broadcaster.

Write or call for additional information and for the name of the broadcast dealer in your area who handles this family of products.

New Location

DYNAIR ELECTRONICS, INC.

5275 MARKET STREET, SAN DIEGO, CA. 92114
TEL.: (714) 263-7711 TWX.: (910) 335-2040

DYNAIR


For More Details Circle (8) on Reply Card

NAB pointed out that satellite-to-home broadcasting would eliminate the local outlets for news and information. The Association commented: "A comparable service at the national level could never obtain an equivalent grasp of local needs and interests, nor program to meet those needs and interests, nor would local governmental bodies have a means of communicating

with the people. In addition, such a system would be inefficient and too expensive for local and regional advertisers, thereby impacting adversely on the local business community and its employees."

Nor does the NAB consider the wired city concept a viable alternative. "It would unfairly discriminate against those least able to pay for such services as pay cable television.


A wired nation would cost 200 billion dollars in capital investment and about 64 billion annually to operate. No capital entrepreneurs have shown much interest in wiring inner city ghettos where collection problems among the unemployed would be a severe problem, nor in wiring rural areas where the density of subscribers per mile would probably never recoup the capital investment," the Association concluded.

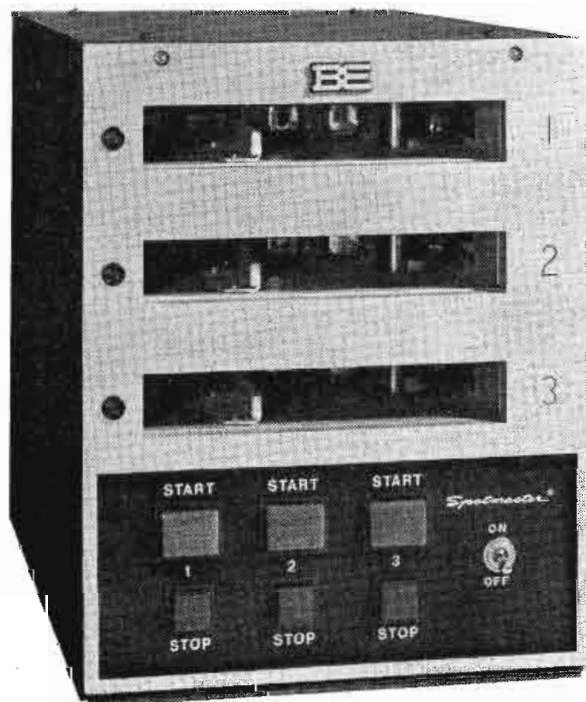

Nobody has it like the **NEW** Spotmaster 5300 A Three Deck

When we say "Nobody has it like Spotmaster," we mean it.

Here's the most advanced three deck on the market. It's our up-dated 5300A with *plug-in* decks for unsurpassed accessibility; and a new internal mechanical design which insures stable and accurate deck and capstan positioning independent of front panel reference. And note the run lights next to each deck.

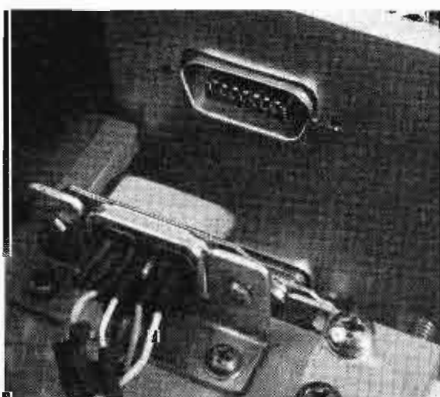

All leads to the deck go through this plug-in connector.

More features? A premium, direct drive hysteresis synchronous motor; reliable low voltage, solid-state, solenoid switching, the superb Phase Lok III head bracket, FET muting, active cue tone filters and rear panel LED service aids. It's all there in the new Spotmaster 5300A.

For information call or write Broadcast Electronics, 8810 Brookville Rd., Silver Spring, MD 20910. Phone: (301) 587-1800.

BROADCAST ELECTRONICS, INC.


A FILMWAYS COMPANY



For More Details Circle (9) on Reply Card

100th Anniversary For Microphones

April marks the 100th anniversary of the invention of the microphone by Emile Berliner, at age 25 and a penniless immigrant youth from Germany, who went on to give the world another of its greatest benefits in the form of the disc record and player, the method of mass-producing discs from a single master, and the famous "His Master's Voice" trademark.

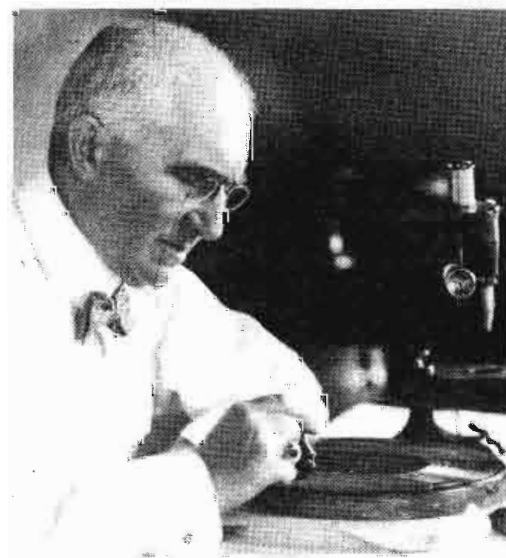

Emile Berliner's microphone made practical telephony possible, and its acquisition by the then-fledgling Bell System saved the firm from destruction by the then-powerful Western Union and paved the way for Bell becoming the world's largest corporation. The loose-contact principle introduced by Emile Berliner and still in use throughout the communications world today, was deemed to have passed the limits of scientific credibility at the time.

BROADCAST ENGINEERING



Our broadcast consoles get around.

Mexico City. Nashville. San Juan. New York. Tampa. Brazil. Albuquerque. Fort Worth. Haiti. Japan. Tacoma.

All over the world broadcast engineers are finding that ADM® broadcast consoles have the advanced performance and engineering they require. And for good reason . . . our specifications are the finest in the industry!

Expressly designed for broadcasting, ADM full-featured consoles provide complete flexibility through plug-in modular components. And human engineering supplies ease of operation through functional lay-out of controls.

For individual broadcaster's needs, ADM custom-engineers consoles to customer specifications.

All ADM consoles are ruggedly built. Or we wouldn't back them with the strongest warranty in the business—an exclusive 5-year warranty.

No wonder ADM consoles take a lot of exotic trips.



The sound heard
'round the world.

AUDIO DESIGNS AND MANUFACTURING, INC. • 16005 Sturgeon, Roseville, Michigan 48066 • Phone: (313) 778-8400 • Cable: AUDEX • TLX-23-1114

AMPEX DISTRIBUTED OUTSIDE U.S.A. BY AMPEX INTERNATIONAL OPERATIONS, INC.
For More Details Circle (10) on Reply Card



The BVH-1000.

Consider the advantages.

Last year, Sony Broadcast introduced the prototype of a new 1" high band video recorder. The BVH-1000.

The BVH-1000 produced picture quality difficult to believe. In fact, broadcasters didn't believe it. They had to see it for themselves. And they snapped up every prototype we could deliver.

Since then, we've made some changes. Added more features. Expanded the BVH concept to include a portable model, the BVH-500, for professional 1" production in the field.

And we've sold a lot of machines.

If you're considering the move to 1", consider the advantages of the BVH-1000.

1. The Advantage of Shared Sector Scanning. The Sony Broadcast BVH-1000 and BVH-500 both use an exclusive system of scanning that records video and sync (lines 1-17) with separate heads. Which means the entire vertical interval is captured and available for encoding any signal required in the future by the FCC.

Color banding is eliminated. And generation after generation, the BVH-1000 picture retains incredible clarity and precision.

2. The Advantage of BIDIREX. Film editing techniques, with a professional video recorder?

That's what you get with the BVH-1000. Not one, but two control modes are provided to give editors a true "film" feeling. In shuttle mode, the tape can be moved in either direction, from stop to 30 times normal speed. With a recognizable picture, so you can make fast editing decisions.

In jog mode, the BVH-1000 lets you move the tape as though you were positioning the reels by hand—while you monitor a fully locked picture.

3. The Advantage of Interchangeability. 1 dB down is the specification.

Need we say more?

Sony's interchange is guaranteed by a gimmick-free devotion to precision mechanics and supported by the experience of building several hundred thousand video recorders.

4. The Advantage of Color Framing. Some high end production recorders don't offer color framing. Others make it available as an expensive option.

But both the BVH-1000 and BVH-500 provide color framing capability as standard equipment. Add that to a logic system ideally suited for computer assisted editing, and the Sony BVH-1000 is your best bet to produce that "word from our sponsor."

5. The Advantage of High Fidelity Audio. Not one, not two, but three isolated audio tracks with frequency response from 50 Hz to 15 kHz. With over 50 dB isolation between tracks.

Never before has any production recorder offered the level of audio quality found in these two new Sony Broadcast machines.

And a special wide band amplifier is automatically switched onto the cue track in search mode, to accommodate SMPTE code playback in high speed.

But it is impossible to describe all the advantages of the Sony BVH-1000 and BVH-500 high band recorders. You must see them to believe them.

Contact Sony Broadcast today, and ask for a demonstration. You'll see why networks and production companies alike are buying this remarkable new recorder.

Sony Broadcast

Sony Corporation of America, 9 West 57 Street, New York, New York 10019 (212) 371-5800.

Sony® is a registered trade mark of Sony Corporation of America.

For Demonstration Circle (11) on Reply Card
For Literature Circle (12) on Reply Card



Figure 1. With more and more broadcast programming being produced on video tape, there is a growing need in the industry to understand specialized lighting techniques—both to create dramatic effects and to solve video problems.

Notes on advanced techniques

BEYOND FORMULA LIGHTING

By Ron Whittaker

The standard "formula" approach to television lighting has served the industry rather well over the years. Those who have taken the time to learn it know that it can be relied upon for 90 percent of the day-to-day production requirements. Traditionally, commercial television has had a limited need and opportunity to go beyond the formula approach. And when you consider the regular limitations in studio time, resources, etc., this is not surprising.

But recently some things have been evolving which suggest that producers and lighting directors need to go beyond these simple formula approaches to meet the challenges being presented by some important changes in the industry.

First of all, we are seeing more and more programs and commercials produced on video tape. Formerly, the "important stuff" was generally produced on film, usually by specialists who knew something about the technical limitations in the video medium. Although the battle over film vs. video tape will undoubtedly rage for some time to come, we can't deny that more and more television content is being produced on video tape.

But many of these video tape productions lack the artistic production quality associated with film, particularly in the area of lighting. There are a number of reasons for this. For one thing, many programs now are "recorded on tape before a live audience," and the lighting has to be fairly flat to insure that a number of camera angles are adequately lit at the same time. With film, scenes are typically shot "take" by "take," with each scene being carefully composed, miked, rehearsed and lit.

Another reason is that the art of creative and dramatic lighting has been much more a part of the history of film than video. Very early it was learned that video would not handle anything like the brightness ratios that were possible with film. Engineers, with an eye on technical excellence, saw that relatively flat, even lighting looked best on a waveform monitor. This judgment was often borne out by

the technically disastrous results produced by "production types," who would try to emulate "Hollywood lighting," without an understanding of such things as waveform patterns, brightness ratios, consistent reference whites and blacks, etc. "Hollywood lighting" (whatever that is) may look strikingly dramatic when projected on a theater screen but very poor on a home receiver.

There are a number of other factors which put a greater emphasis on high quality lighting.

Television technical quality is highest with totally electronic photography. resolution, tonal

scale and color fidelity of studio cameras have all made major gains in the last few years. Even the weakest link in the quality formula, the home receiver, has made gains—both through improvements in receiver design and in the distribution system (principally CATV). In short, home viewers can now potentially "see" more than ever before. These are just some of the reasons behind the need for production personnel to have a greater working knowledge of video lighting.

This article will **not** deal with the basic "formula" approach to lighting—even though it can be relied

upon for most of your day-to-day productions. However, if you would like to review this basic formula approach and some notes on the whole subject of television lighting, you might look up the March/April and May/June, 1976 editions of **Video Systems**, which featured a two-part article on the subject.

"Non-Standard" Lighting

Beyond the basic formula approaches to lighting there is frequently a demand to design lighting to meet special needs—needs represented by (1) problem subject matter such as glassware, bad complexions, etc., (2) special dramatic

Continued...



Figure 3. This photo illustrates the effect of the lighting tent (shown in Figure 4) on the same subject matter as in photo 2. Note that the result is much "duller," but that the subject matter has been brought within the brightness capability of the broadcast system. Although the effect may look a little drab here, the video quality would be greatly improved.



Figure 2. This photo illustrates a collection of objects which have high spectral reflections. Although these reflections might look attractive when reproduced in a color printing process they cause severe problems in television video.

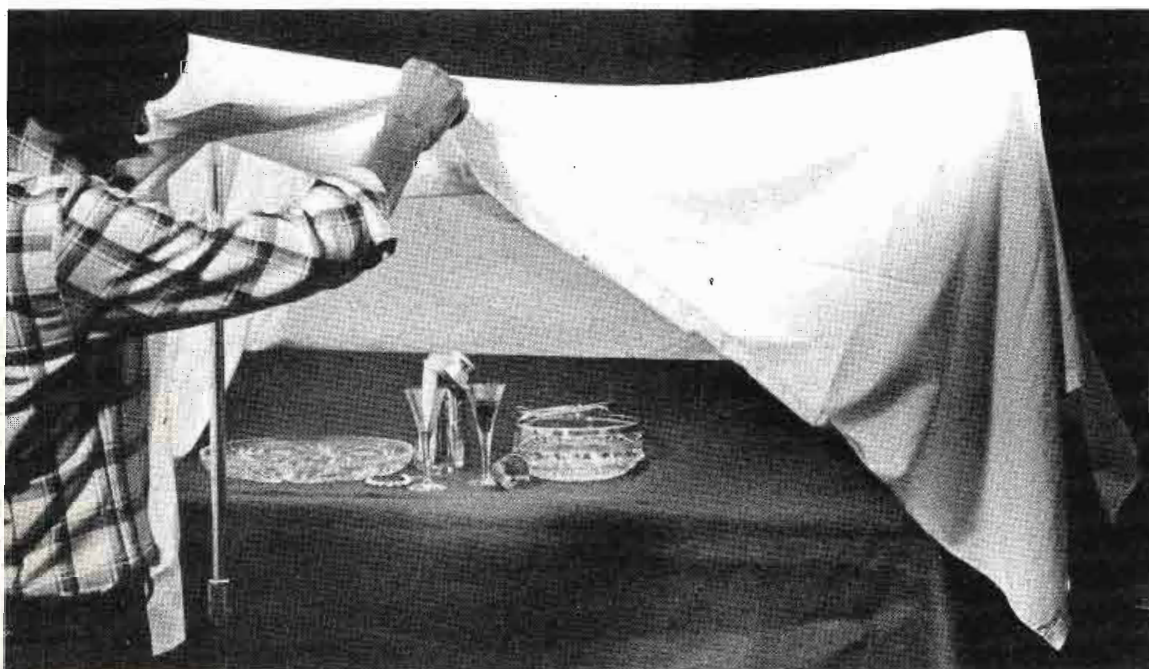


Figure 4. The bed sheet light tent used to make Figure 3. Several studio lights are directed at the tent from a number of angles. The type of lights doesn't matter, since they will end up being greatly diffused. For maximum effect completely surround the subject matter with the sheet, leaving only a small opening for the camera lens.



Figure 5. Illustrates the significance of lighting in hiding details. This photo was taken with rather diffused (flat) lighting. The shadow from the flowers indicates that the lighting is far from completely flat, however. If it were, you would see even less surface detail.



Figure 6. In this photo an undiffused key light was used at about 85 degrees to the right of the camera to bring out surface detail. Again, note the shadows from the flowers.

Lighting

(Continued)

interpretations, and (3) a need to, in general, maximize the attractiveness of people and products by emphasizing the positive attributes and playing down or hiding negative attributes.

Shiny Objects

Let's start with one of the biggest headaches of all—objects producing spectral reflections.

Spectral reflections from shiny objects are a problem from a number of standpoints: they put spikes in the video which have to be clipped, they cause bad streaking or comet-tailing in video when movement is involved, they cause problems for chroma key, and, in general they degrade both the quality of the video and the appearance of the item being photographed.

Figure 2 shows some particularly

difficult subject matter under standard, formula lighting. Figure 3 shows the same objects lit by the "tent" arrangement shown in Figure 4. You will note that the spectral reflections have been eliminated.

The problem with spectral reflections, of course, is that your light sources are reflected directly into the camera lens. And, if that isn't bad enough, these lights tend to be concentrated, since most of the objects have convex surfaces.

From Figure 4 you can see that a bed sheet tent diffuses the light, so that, in effect, it becomes omnidirectional. In short, no hot spots. And as an important added bonus, you don't get a wide-angle reflection of your camera and surrounding studio.

A white, frosted, shower curtain will work equally well as a diffusing

medium. In either case, don't get your lights too close; not only will hot spots start to become visible, but you might just set the whole thing on fire!

Another way of controlling spectral reflections is with dulling spray. Be certain before you use dulling spray, however, that it will not damage the surface of the objects you are working with. The owners of some valuable items have refused to allow the surface to be sprayed because they feared it would be difficult to get off, or would permanently affect the surface.

An important thing to note is using the lighting tent is that the back of the tent should not be picked up by your camera, since it would probably cause the video to exceed the 20:1 brightness ratio. This would cause tonal compression

Continued...

When you're shooting ENG, two things are certain: You never know where news will happen next. And you never know what will happen when you get there.

For the first, you need lenses with proven performance. The kind of versatility to handle most any kind of shooting situation. Plus the ruggedness and reliability to withstand daily use. And abuse.

For the second, you need lenses backed by service. To keep your lenses in top condition. And solve the problems no one can foresee, but everyone faces.

At Canon, we offer the widest selection of ENG lenses in the business. Premium lenses, engineered by the same people responsible for our Academy Award in lens design.

Built by the people who helped make our Scoopic camera the network newsman's favorite silent '16'. And backed by a dedicated

group of servicepeople, in key cities, nationwide.

When you're shooting ENG, you need more than lenses that work when the going's easy. You need lenses you can depend on. To reliably handle everything you'd reasonably expect to find on location. Backed by loaner lenses and quick-turnaround service when the unexpected shatters your peace of mind.

You need Canon.

For more information about Canon ENG lenses, please contact Jack Keyes or Ken Morishima in New York; Matt Miyazaki in Chicago; or Harry Hirai in Costa Mesa.

Canon U.S.A. Inc. Head Office:
10 Nevada Drive, Lake Success, N.Y.
11040 (516) 488-6700.
140 Industrial Drive, Elmhurst, Ill. 60126 (312) 833-3070.
123 Paularino Avenue East, Costa Mesa, Ca. 92626 (714) 979-6000.
Canon Optics & Business Machines, Canada, Ltd.,
3245 American Drive, Mississauga, Ontario L4V 1 B8, Canada
Canon Amsterdam N.V., Industrial Products Division:
De Boelelaan 8, Amsterdam, Netherlands
Corporate Sponsor, American Society of Television Cameramen.

Canon®

SOMETIMES, THE NEWS CAN HAVE TOO MUCH IMPACT.



For More Details Circle (13) on Reply Card

Lighting

(Continued)



Figure 7. A low key lighting effect does not mean "low intensity." To achieve this effect the key light is moved to an extreme angle and key-to-fill ratio is greatly increased.

which would darken the appearance of the object.

You can avoid this and still get some back light through the back side of the tent by using a curved piece of colored matt-surface cardboard or paper under the object(s), which curves up to form part of a background.

You may find that you want to introduce some natural reflections on the surface of the object. This can be done by hanging strips of black crepe paper inside in front of the tent. Just experiment until you get an effect that looks attractive and realistic.

Other Uses For Flat Lighting

Actually, tent lighting is only flat lighting taken to the extreme. There are some situations where a

less drastic form of flat lighting can be used to advantage.

Acne-scarred complexions often look bad on camera—especially in close-ups. Formula lighting is designed to bring out a certain amount of form and texture in faces, and this is very desirable if the skin is relatively smooth. If it is not, start with expertly applied make-up, and then back that up with flat lighting.

A typical lighting set-up would be two scoops covered with scrims (spun-glass-like material) at a 1:1 key-to-fill intensity ratio. Place one scoop about 30 degrees to the left of your close-up camera and the other about 30 degrees to the right. Both should be just above the height of the lens. Broads or Fresnels could be used with good scrims, if scoops are not available.

Since the subject will look rather flat with this technique, make sure that you have both good backlighting and good background lighting. This will insure as much depth and separation as possible.

Interestingly enough, another application of this flat lighting technique is with women who are anything but flat. Cleavage, which is too much or too obvious, is still a "no-no" with much of the broadcasting audience. Occasionally, however, a guest will show up for a program with a dress that is too revealing for the family hour.

Before creating an embarrassing situation, try a flat lighting approach. In this case you can leave the scoops in a higher position—pointed down at about a 45 degree angle from the lighting grid.

Generally, you encounter these "crises" on relatively short notice, of course, and about the best you have time for is to change the normal 2:1 key-to-fill ratio to 1:1 and hope for the best; or, in this case, the least.

Emphasizing Surface Detail

On the other side of the coin, you sometimes need to emphasize surface detail. Figures 5 and 6 represent such a case. With flat lighting, or even with formula lighting, there is insufficient detail on the surface

of the subject matter. By placing one non-diffused point source of light at an oblique angle to the surface of the object, strong, minute shadows are created which emphasize the necessary detail. In this case you would probably want very little, if any, fill light; only a key light, a back light and possibly a background light. For a key light you might try a beam-spot projector or an ellipsoidal spot (without a Fresnel lens).

Food Commercials

One of the most difficult subjects to photograph effectively is food. It is amazing how a seemingly very attractive food dish can look very unappetizing when it shows up on a TV screen.

It's been the writer's experience that many food dishes have to be quite carefully lit—generally individually lit—to make them appear attractive.

First of all, since your camera will be operating at close distances, there is typically a problem with depth of field. The only way you can get more depth is to stop down your lens, and the only way you can stop down your lens and still stay away from video noise is to increase the light level.

If you are selling ice cream or Jello, this can be a problem. I have resorted to using lard for ice cream (back when there were no FTC problems) and had a refrigerator load of Jello dishes standing by for different video "takes."

For food dishes you need to experiment with light placement, using a color monitor, to see what will bring out the best effect. Often rather strong backlighting, sometimes from two angles (cross back-lights) will provide added depth and "sparkle."


It is recommended that you put the dishes or settings on separate tables and have all your lights on adjustable roller stands. By slowly moving the lights while observing the effect in a monitor, you can discover the best effect. After some practice, your "search time" will be greatly reduced on subsequent productions.

Continued...



Central Dynamics. International pacesetter in television broadcast equipment.


Video switchers.

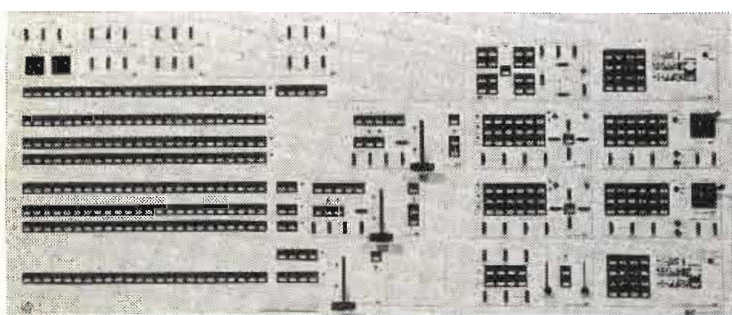

New, Super Powerful CD 480 The Smart Switcher


Revolutionary modular switchers with unprecedented production power. They outperform the largest conventional switchers, yet are extremely simple to operate. Their power and ease of operation are due to CDL's new Sequential Effects (SFX) Amplifier, which can cut, mix or wipe between two Background Sources and two separate Key Sources either individually or in any combination. Models with one or two SFX Amplifiers provide all the standard and optional features you need, including Rotary & Random wipes, RGB Shadow keys, Hard and Soft Color Border wipes, Color Border keys, Quad with Color Borders, Encoded Chroma keying, Key Mask generator, and 16, 24 or 32 inputs. A variety of modular accessories will continue to keep your switcher smarter than the rest as new technology develops.

Ask about the AFM-10 Audio Mixer/Switcher—an ideal companion to the CDL VS-10 and VS-14 video production switchers.



VS-10

An inexpensive broadcast quality 8-input switcher that features flexibility and ease of operation. Self-contained electronics for rapid installation in ENG and other small mobiles.




VS-14

Sophisticated enough for large studio production, yet compact and inexpensive enough for small mobiles. Soft wipes and keys—even a Downstream keyer—are standard. Self-contained and remote versions available.

VSP-1260S

An amazing value

Now the smallest station can afford a conventional 20-input mix/effects switcher of the highest quality and reliability and get it in under 30 days! All features, including an Encoded Chroma keyer and Bordered keys, are standard (not optional, as is often the case). And the price is astonishingly affordable.

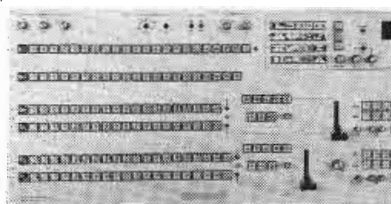

Automation.



System 100

Computer controlled automation system for Technical Operations that communicates directly with a Business Computer System. Stores and retrieves the schedule with entry error checking, makes automatic time corrections, performs complicated audio/video switching sequences (including dissolves, fades, wipes and keys), assigns machines, verifies material, and prints the "As-Aired" log.

Master Control Switchers

Ranging from CDL's new CD 480 MC to a 2 Bus MCS-829 or a 3 Bus MCS-770. All 3 can be interfaced to System 100 Technical Automation System.

Tape editing systems.



PEC-120 Video Tape Editor

A computer editing System with easily operated control panel and CRT display for rapid and precise control of VTR's & Switcher CDL's unique Self Learning Cueing Software Program is a new feature.



EDS-200 Video Tape Editor

A two machine Time Code microprocessor Editor that interfaces to Quad or Helical VTR's.

Also a complete line of production and TV terminal equipment, including:

- SMPTE Time Code Generators and Readers
- Video and Pulse Distribution Amplifiers
- Chroma Keyers: RGB and Encoded
- Processing Amplifiers
- Audio/Video Routing Switchers
- Pulse Assignment Systems
- Machine Control Systems

Request our Short Form Catalog



CENTRAL DYNAMICS LTD

CANADA Montreal

147 Hymus Blvd.,
Montreal, Quebec H9R 1G1
Phone—514-697-0811
TWX—610 422 3906

U.S.A.

New York City

230 Livingston Street,
Northvale, NJ 07647
Phone—201-767-1300
TWX—710 991 9753

Chicago

331 West Northwest Highway,
Palatine, IL 60067
Phone—312-991-4720
TWX—910 693 4805

Los Angeles

15130 Ventura Blvd.—Suite 307,
Sherman Oaks, CA 91403
Phone—213-789-0574
TWX—910 495 1713

Lighting

Continued...

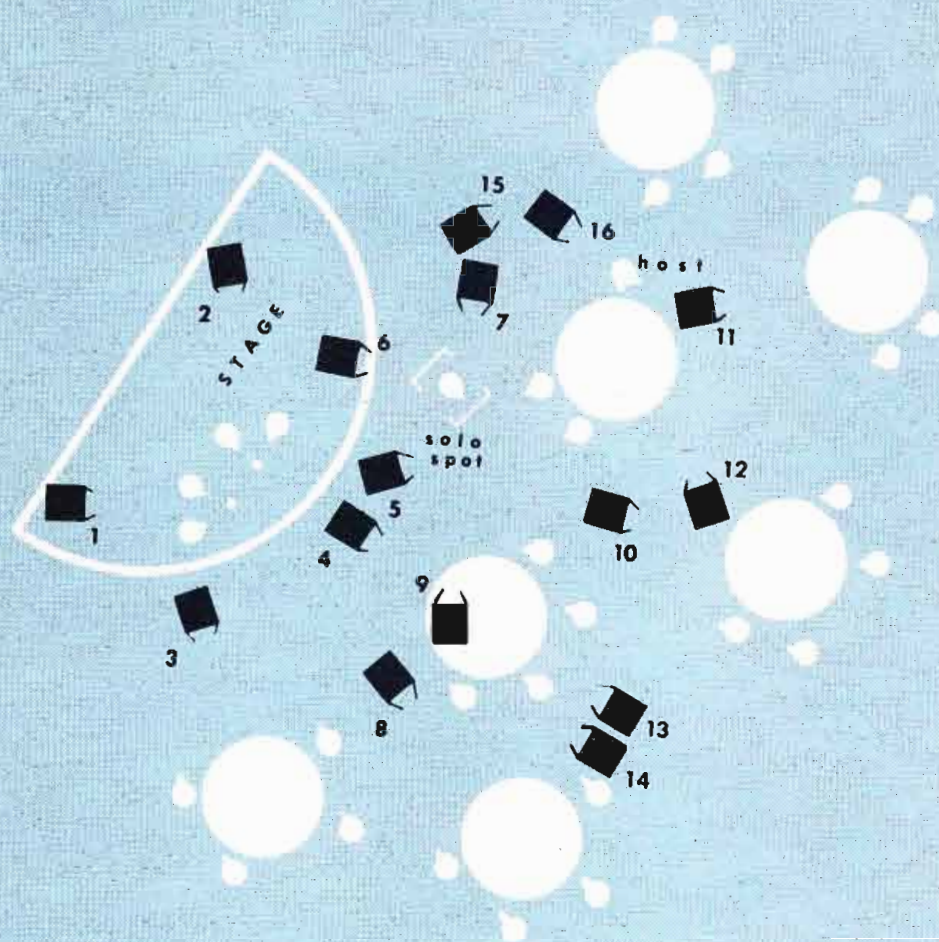


Figure 8. Low key lighting is very appropriate for cabaret or night club settings. Here, the minimum number of lights has been selected to give adequate frontal illumination to the stage, solo spot and host positions for several camera angles. The single Fresnels aimed at each of the seven tables gives a rim light effect on the faces in the audience for most camera angles. These single lights also maintain an illusion that the tables are lit by stage illumination (or possibly by the candle on each table).

Each of the 16 Fresnels is barned off as much as possible to reduce ambient, spill light, which would weaken the low key effect. With ambient light at a minimum in the background areas, your cameras can roam a full 360 degrees around the setting without being seen. Experience using this setting has shown that these areas can be kept dark enough to hide one camera when another is shooting directly at it from the other side of the set. (The only thing that might give you away is the tally light on the opposing camera on the lap dissolves; and, if you want, you can even shut that off.)

The double back lights on the stage become kicker lights on the performers for some camera angles. Back light #1 is slightly closer than #2, because the performers in the first two stage positions have Afros. The two large key lights on the stage (#13 and #14) are low in height and at a relatively great distance to maximize a star filter effect on reverse angle shots from behind the stage.

The lights for the solo spot and host position are faded up when needed. Five lights cover these positions. Lights #9, #6 and #7 are used for the solo spot. (Two back lights provide separation for a number of angles.) Only two lights are used for the host spot: #12 and #16.

Fresnels #3, 4, 8, 5, 10, and 11 are for the seven tables. See the text for more details.

If food is supposed to be served hot, it is best if it is obviously **steaming** hot. A microwave oven standing by is a good solution for this. Good backlighting should make the steam visible against medium to dark backgrounds.

Watch out for the effect of "simultaneous contrast" with certain foods. This is when a background or adjacent color affects the color of the central subject matter. Generally, the color shift is to the compliment of the influencing color. Tuna fish, for example, can look down right bad, if it is placed next to the wrong color. You will also have to carefully watch brightness ratios with foods in general, to make sure video isn't shifted away from normal hue and brightness values.

Dramatic Effects

Dramatic lighting interpretations are probably the most challenging in the art of lighting. These productions can take on an entirely different atmosphere when interpreted by different lighting directors. Part of the challenge here is that with video productions you generally don't have the luxury to stop down after each scene, or reset lighting. The word "generally" implies two qualifications.

First, it is possible to sometimes unobtrusively change studio lights during a production, especially if you have a programmable lighting board which can automatically alter large numbers of lights at the same time. Second, there are situations where video tape is shot like film; that is, one "take" at a time. Because of the many advantages to the latter approach, we will probably see more of it in television in the future.

Low key lighting is the most popular category of dramatic lighting. Contrary to popular belief, low key does not mean low intensity. With low key lighting, the key lights are just as bright as with the formula approach. If they weren't, the engineers would just have to open camera irises until the reference white reached 100 percent.

Low key implies a high key-to-fill

Continued...

The 1480 Waveform Monitor looks like your faithful 529 ... Until you examine the features


Probe Input option For high-impedance test points.

Display offset For level setting accuracy approaching 0.2%, offset the display of your signal with 1480's very accurate calibrator.

Bright CRT Bright enough to examine VITS without dimming the lights.

Two gratitudes Your choice of an internal or an external graticule is made with the scale illumination control.

Digital line and field selection For positive identification of signals displayed.

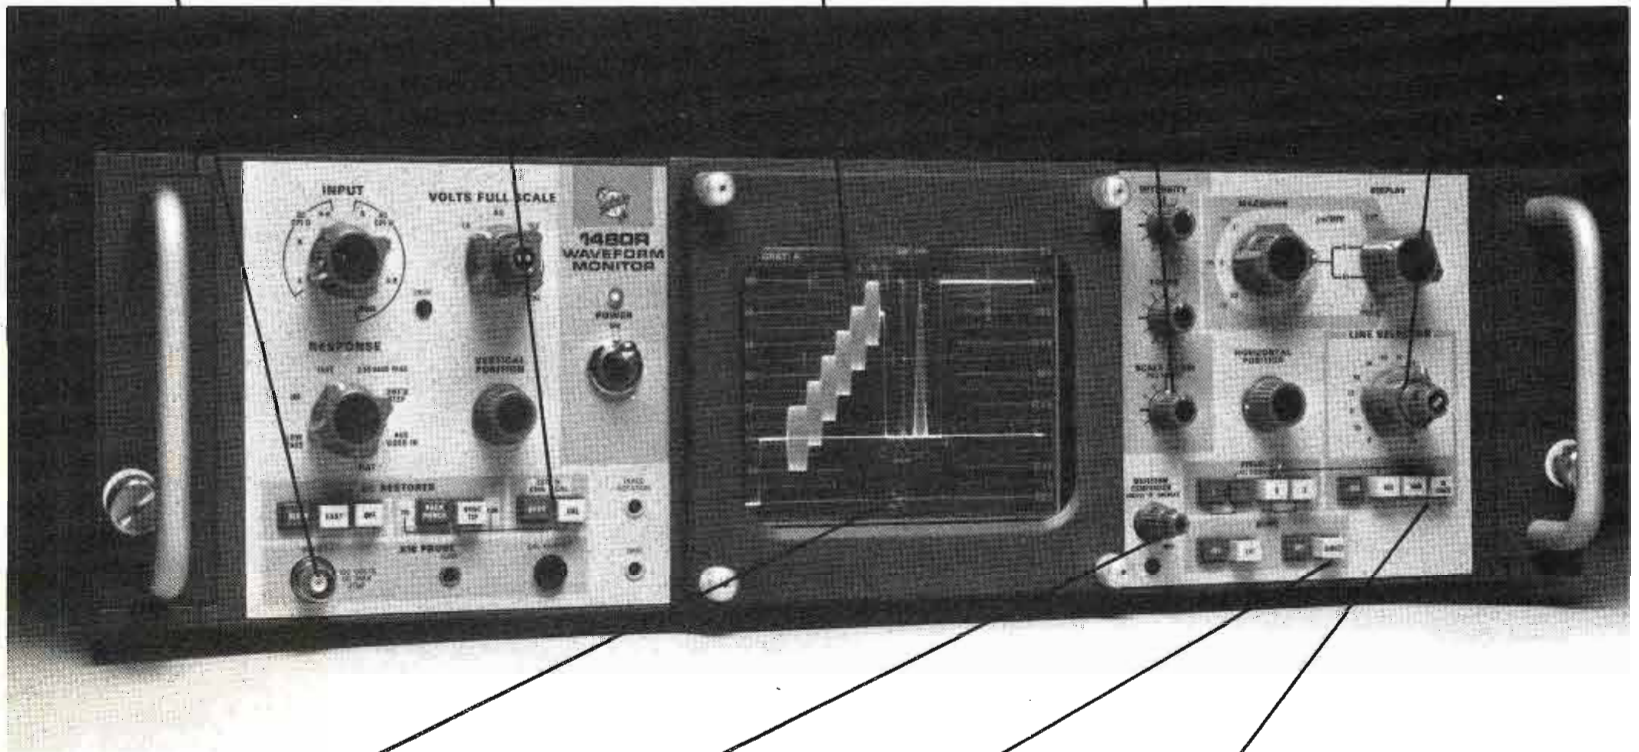

Automatic intensity change When you select a faster time base from the two-field mode, optimum intensity is maintained.

Comparison modes The 1480 will overlay portions of a signal for easier and more accurate comparison of levels.

Direct or AFC Sync Eliminates display jitter or displays jitter.

15 Line display This 1480 feature permits head-by-head VTR signal examination.

on rear panel

Auxiliary video input A special input/output circuit allows you to measure chroma/luminance gain and delay without disturbing your signal and for the use of special filters for unique measurements.

Line strobe In addition to having an auxiliary strobed video out for identification of individual lines on picture monitors the 1480 will strobe individual line vectorscope displays.

The TEKTRONIX 1480R Waveform Monitor does look like the TEKTRONIX R529; just as the half-rack width 1480C looks like the 529. But, there are differences. Some of them subtle, like the sharply focused trace on the bright CRT, others more conspicuous, like the optional input for use of a high-impedance probe. Some features won't be noticed until you examine the rear panel, like the line strobe output for strobing a vectorscope. This is a technique for intensifying individual line displays.

Yes, the 1480 Series Waveform Monitors are different, just as your measurement needs are different. Different from your needs in the sixties, when the 529 series was the high-performance monitor.

Write us, or you use the reader service number to get a series of application notes on the 1480. Better yet, contact your Tektronix Television Field Engineer.

He will be glad to show you the 1480 and its benefits.

Tektronix®
COMMITTED TO EXCELLENCE

For Technical Data Circle (25) on Reply Card
For Demonstration Circle (26) on Reply Card



Figure 9. Rim lighting will provide a dramatic effect, but camera angles must be carefully controlled. One or two backlights should be used, depending upon subject matter.



Figure 10. It is sometimes desirable in news and documentary work to hide the identity of a subject. This situation is a little more complex than straight rim lighting because the interviewer must be well illuminated.

Lighting

(Continued)

ratio. This results in greater shadow areas—the ones the fill lights would normally fill in. By moving the key lights to an even greater horizontal angle—say to 70 or 90 degrees, instead of the normal 45—the low key effect will be further enhanced. (Figure 7)

Depending upon the intensity of the fill light—if you want any at all—you will lose shadow detail. But part of the object of low-key lighting is to create large dark areas in the video.

Be advised that low key lighting does not show up “attractively” on a waveform monitor or on a black and white receiver without DC restoration. Dramatic license will have to cover that.

The increased angles of the key lights will generally create unusually bright highlights in the subject matter, so you will have to guard against clipping the video spikes.

Figure 8, with its lengthy explanation, illustrates a lighting ploy for a low-key production. The close-ups on the stage performers, solo spot and host will not be low key, but the wider shots of the whole setting, and especially the

audience reaction shots from most angles, will definitely be low key. For a production such as this you would want a dark-colored or black background and a dark floor covering. Even light colored table cloths will introduce undesirable ambient light. A good choice to keep the scene “warm” would be dark red.

Figure 9 illustrates the effect of rim lighting. Notice that the subject matter is almost totally in shadow; low key lighting to the extreme. Besides the dramatic effect you see in Figure 9, rim lighting can be used to hide the identity of an individual. (Figure 10) You have probably seen this approach used in news and documentary work.

Basically, all you have in rim lighting is the effect of one or two back lights; nothing else. Two back lights will give you a little more of a “rim,” which might be necessary with some hair styles. Be sure to keep the ambient light level down, or the face will start to become visible. A white shirt or dress worn by an interviewer, or even a light floor, will start to illuminate a dark face.

When the rim lit person is taking part in a one-on-one interview, the biggest problem is to keep the back light from the interviewer off the interviewee. If careful barning of the back light doesn't do it, you may have to forego the backlight on the interviewer completely.

In Summary

There are many other non-standard lighting situations which could be touched upon. You might look to future issues of **Broadcast Engineering** for more on the subject.

In the space allotted, however, we have tried to illustrate and explain some of the more common problem areas.

Again, we might say that the future of broadcasting will undoubtedly put much more stress on creative and effective lighting. Already we are seeing this need as video starts to assume some of the role previously held by film.

You might also keep in mind that in the final analysis all video ultimately comes back to **light**, and how it interacts with subject matter, and what we do to both shape and follow up on that interaction. □

When **WBAC** buys **AMPRO**, they broadcast it . . .

Bill Thomason,
President
WBAC,
Cleveland, Tennessee



and, according to Bill Thomason, President of WBAC . . . “our reason for choosing an Ampro console was its versatility and the unique craftsmanship that went into the makeup of this fine piece of equipment. WBAC has been in the broadcasting business for 32 years and our format and needs have grown. We were impressed by the many functions of our eight channel dual mono Ampro. For this reason, we decided to try Ampro’s cartridge decks and, to our satisfaction, we have not had to do any type of maintenance other than routine head cleaning for over a year.”

Ampro is the choice of the professional broadcaster. Their complete line of 6, 8, 10 and 12 channel audio consoles—stereo, mono, dual mono and stereo or simulcast—as well as cartridge equipment and turntable pre-amps are backed up by a 24 hour

staff of engineers seven days a week. All Ampro equipment features superior RF shielding . . . never a spurious pick-up problem no matter XMTR proximity. All equipment is logically laid-out for easy operation, constructed by craftsmen using the highest quality components. And, most important, Ampro equipment is made to last and last.

Find out how you can BROADCAST it . . .
call your Ampro representative or the factory
today.





AMPRO CORPORATION
850 PENNSYLVANIA BLVD., FEASTERVILLE, PA 19047 • (215) 322-5100

For More Details Circle (14) on Reply Card

Radio Workshop

RENG: RPU Roundup

By Peter Burk and Peggy Brown*

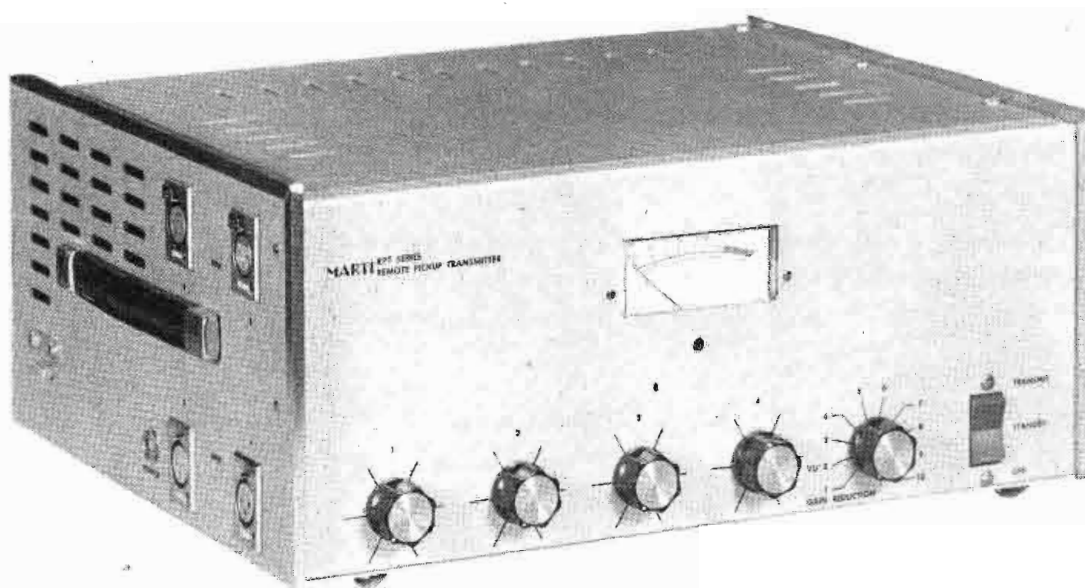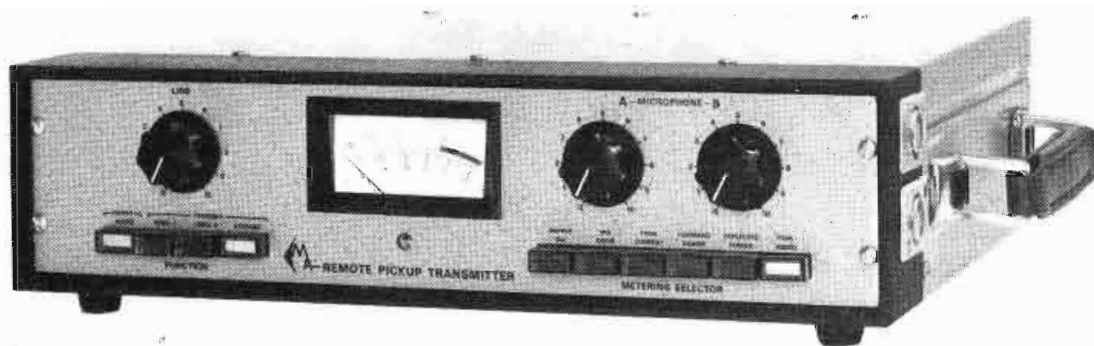

Here are two examples of available RPU transmitters. Above is the Moseley unit. Below is the Marti transmitter. (No picture was available at press time from McMartin.)

*Peggy is the Editorial Assistant for **Broadcast Engineering**. Before coming to BE, she graduated from the University of Kansas William Allen White School of Journalism where she received a BS in news-editorial with a magazine emphasis. She has worked on publications for the Architects Community Team, a VISTA organization; and KU publications.

■ Hopefully during the last few months we have stimulated some serious thinking about RENG. This month we will show you what is available and what equipment you need to get on the electronic bandwagon.

Purchasing RENG equipment should be approached thoughtfully. You'll be using the equipment for a good many years, so make the right choice the first time around. *Plan ahead.* Frequency allocations are already severely limited, especially in the VHF bands, and they aren't going to get any better. If you can anticipate your needs for the coming years, you'll save some grief later on.


The heart of your RENG system is the VHF or UHF remote pickup link. That's the area that we'll devote the most attention to here. There is a pretty good selection of transmitter and receivers that meet broadcast specs. For that reason, we'll confine our discussion to broadcast quality equipment. If you are convinced that adequate quality is attainable with conventional communications type two-way equipment, we suggest you find a copy of "Taxi Cab Monthly" to continue your search. We're just not sold on two-way radio modifications working for RPU.

The comparison charts that follow should be helpful in selecting equipment that will meet your needs. The data is taken from manufacturers' published specifications and is as accurate as possible, but is subject to variations in measurement techniques, different degrees of conservatism by the manufacturers. Every attempt was made to include all manufacturers of broadcast remote pickup equipment. Prices shown are accurate as of February, 1977 and are subject to change.

Back Packing—Once we have the basic link back to the station under control, we can concentrate on the portable equipment that will enable the reporter to walk right up to the scene. At least two companies make broadcast quality portable transmitters that are designed specifically

Continued...

It's a very good year...

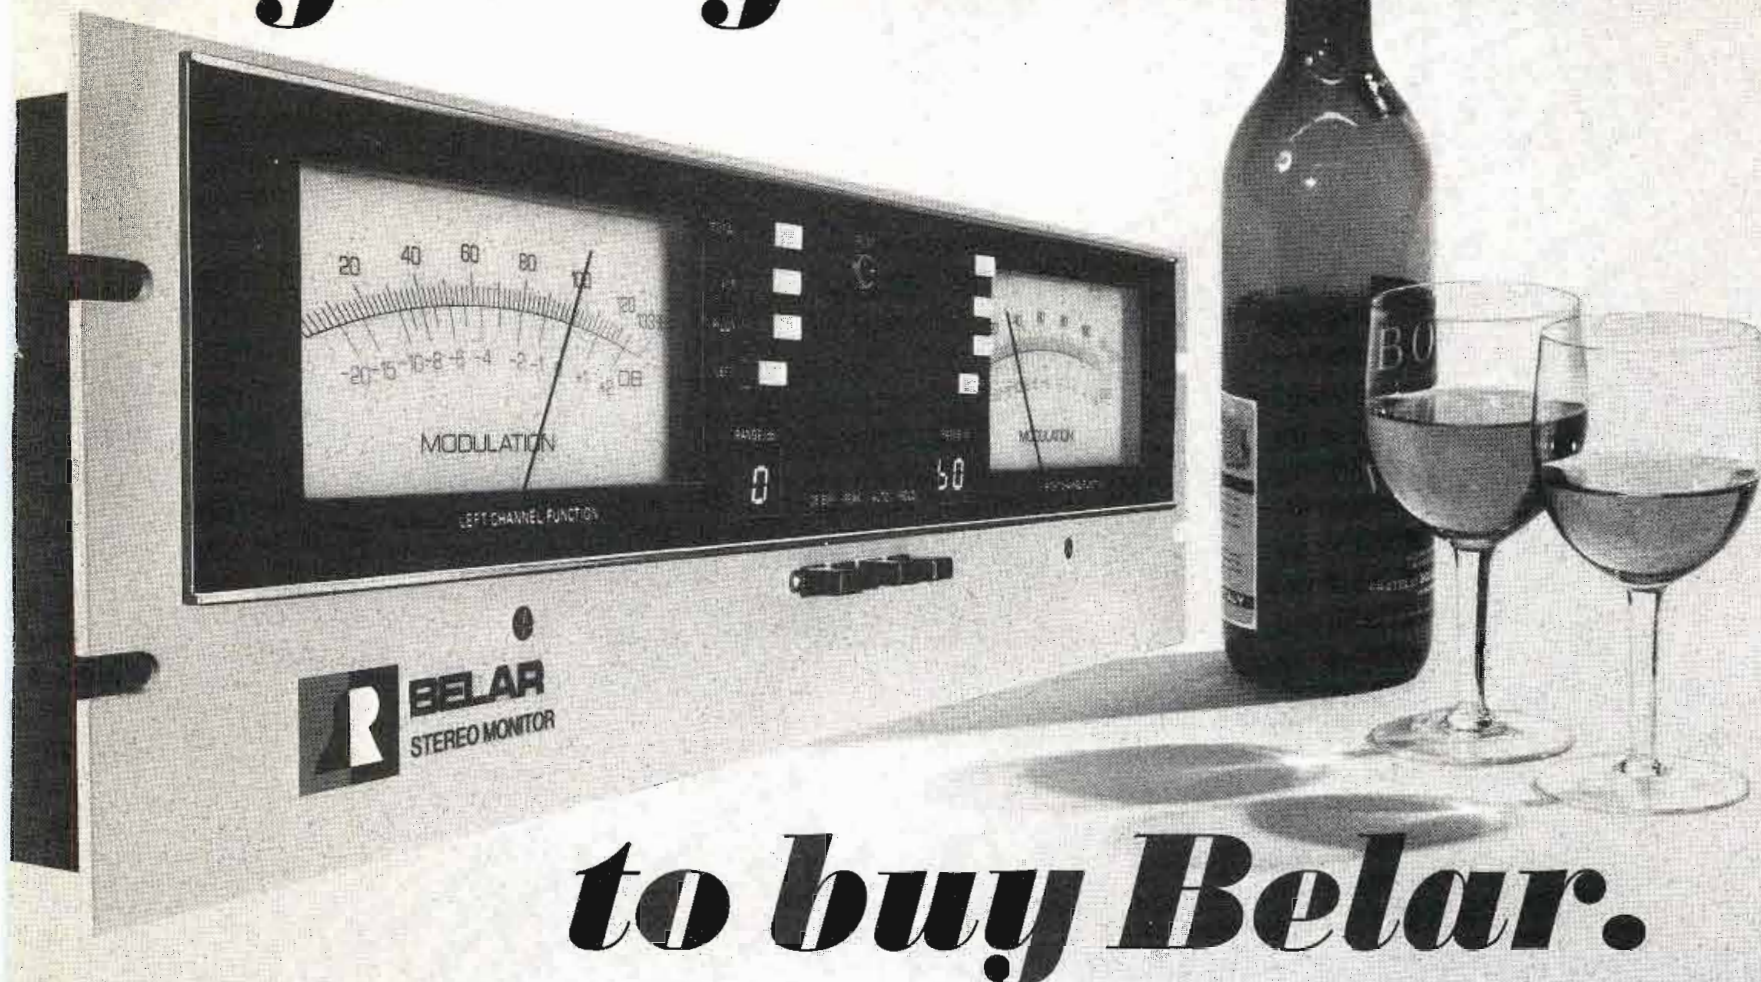


to buy Belar.

There were always lots of good reasons to buy Belar . . . now we can give you many more. Like our new automatic Stereo Monitor, shown above.

We're introducing a line of new products that will set new standards of performance in broadcast monitoring. Each piece of equipment has been Belar-engineered to remain state-of-the-art for years to come. And, of course, our monitoring systems are suitable for ATS.

Check our new equipment and see why we say this is a vintage year. Buy Belar today . . . in ten years, you'll still be thanking yourself.

- Our new **FM Modulation Monitor** features a sample-hold and absolute magnitude peak detector circuit to capture and display all the program peaks on the modulation meter.
- Our new **Digital FM Modulation Monitor** features a continuous LED display to instantaneously indicate program peaks.
- Our new **Stereo Monitor** features two sensitive auto-ranging voltmeters for simplified automatic measurement of stereo separation and crosstalk.
- Our new **SCA Monitor** features an auto-ranging voltmeter for simplified SCA measurements.
- Our new **Digital FM Frequency Monitor** includes off-frequency alarms for carrier, 19 kHz pilot, and SCA frequencies.
- Our new **FM RF Amplifier** maintains full stereo performance with the ability to select any channel.
- Our new **Digital Clock** provides the necessary timing function for ATS.
- Our new **AMM-2 AM Modulation Monitor** features three peak lights and outputs for ATS modulation control.
- Our **AMM-3 AM Modulation Monitor** features separate meters and four peak lights for negative and positive modulation, and also includes outputs for ATS modulation control.
- Our new **AM Frequency Monitor** includes ± 10 Hz and ± 20 Hz off-frequency alarms, and a loss-of-count alarm.
- Our new **AM RF Amplifier System** permits reliable monitoring with our new shielded loop in a field of 50 microvolts per meter.
- Our new **Automatic Power Controller** provides power correction and alarms for ATS.
- Our new **Mod-Minder** provides automatic modulation control and alarms for ATS.
- Our new **Status Alarm System** starts with two statuses and can be expanded to over 900 statuses.



BELAR ELECTRONICS LABORATORY, INC.

LANCASTER AVENUE AT DORSET, DEVON, PA. 19333 • BOX 826 • (215) 687-5550

When Accuracy Counts . . . Count on Belar

RENG: RPU Roundup

(Continued)

ly for this application. Marti Electronics makes a Model RPT-1 transmitter that weighs just over five pounds and radiates a maximum of one watt (slightly less on 450 MHz). Comrex Corporation builds a model RTA 2.5 watt transmitter that is slightly smaller in size. Both units are available for

either VHF or UHF operation. The Marti unit sells for \$495. Prices on the Comrex unit start at \$900.

Marti is now providing sub-audible tone encoding for the RPT-1. The encoder mounts inside the unit, with a companion decoder installed at the receiver. At present, the encoder is single frequency, but conversion to a two-frequency encoder doesn't appear to be a major project. The two-frequency encoder

would enable the field reporter to select one of several modes of operation. For instance, if the mobile transmitter is set up for two-frequency, the field operator could select which frequency the repeater transmits on. If a tape recorder is included in the RENG mobile unit, one tone could activate the tape recorder while the second tone would select the repeat mode. The Comrex unit is also available with

RPU comparison charts

VHF SYSTEMS

Make	Marti	Moseley	McMartin
Frequency range	150-172 MHz	148-174 MHz	148-172 MHz
Audio response	±1.5 dB 30-7.5 kHz* 10.7/f30 IF filter	±1.5 dB 30-10 kHz	±1.5 dB 50-7.5 kHz
Distortion	2% max.	1.3% max.	1.5% max.
Signal-to-noise	50 dB	55 dB	55 dB
Dual frequency	optional	optional	optional
Price	\$1470	\$2095	\$1370

Transmitter specs

Model	RPT-40	RPL-3	B-1100T
Power out	40 w. max.	13 w. max.	40 w. max.
Spurious	-60 dB	-60 dB	not given
VSWR protection	yes	yes	not given
Audio input	3 mic/1 line	2 mic/1 line	2 mic/1 line
AC power	115/230v 155w	120/240v 45w	115/230v 120w
DC power	13.6v 7a	13.5v 2a	13v 6a
Dimensions	6¼Hx15Wx12D	4Hx14½Wx11D	5¼Hx19Wx14½D
Weight	20 lbs.	16 lbs.	30 lbs.

Receiver specs

Model	R/30-150	RPL-3	TBM-1100R
Sensitivity	.5µV/20 dB	1µV/20 dB	.8µV/30 dB
Selectivity (-6 dB)	±17.5 kHz	±22 kHz	not given
Selectivity (-60 dB)	±22 kHz	±42 kHz	not given
Spurious	-95 dB	-65 dB	-85 dB
Audio output	600 Ω +10 dBm	600 Ω +10 dBm	600 Ω +10 dBm
Carrier operated relay	yes	optional	yes
Power required	115/230v 30w	120/240v 10w	120/230v 20w
Dimensions	8¾Hx19Wx8¼D	1¾Hx19Wx10D	3½Hx19Wx11D
Weight	16 lbs.	10 lbs.	10 lbs.

*With IF filter

tone encoding.

Marti's CU-40 automatic relay control unit provides interface to operate the RPU transmitter and includes an input and associated logic to engage the transmitter only when the channel is not being used. A monitor receiver is connected to the unit to detect the presence of carrier on the repeat frequency. When a valid sub-audible tone is received the transmitter is switched

on and the control unit checks to make sure that the monitor receiver was working by looking for a carrier. If no carrier is received by the monitor during re-transmit, it is assumed that the monitor receiver was not working, and the repeater shuts down.

Comrex manufactures a line of portable equipment primarily designed for cueing applications and audio pickup for television ENG

(remember television?). In addition to the RTA transmitter, their model CRA receiver lends itself to RENG. The receiver is lightweight, and is available on any frequency from 50 to 550 MHz. The unit sells for \$550.

Comrex also builds a broadcast quality cue/remote pickup transmitter with one watt output on any of the RPU frequencies. It is priced

Continued...

UHF SYSTEMS

Marti

450-470 MHz
± 1.5 dB 30-10.5 kHz*

less than 2%

-50 dB

optional

\$1840

Moseley

450-470 MHz
± 1.5 dB 30-10.5 kHz**

less than 1.3%

-55 dB

optional

\$2395

RPT-25

25 w. max.

-60 dB

yes

3 mic/1 line

115/230v 155w

13.6v 7a

6 1/4 Hx15Wx12D

20 lbs.

RPL-4

13 w. max.

-60 dB

yes

2 mic/1 line

120/240v 45w

13.5v 2a

4Hx14 1/2 Wx11D

16 lbs.

R-50/450

.5µV/20 dB

± 21 kHz

± 28 kHz

-95 dB

600 Ω + 10 dBm

yes

115/230v 30w

8 3/4 Hx19Wx8 1/4 D

16 lbs.

RPL-4

1µV/20 dB

± 44 kHz

± 75 kHz

-65 dB

600 Ω + 10 dBm

optional

120/240v 10w

1 3/4 Hx19Wx10D

10 lbs.

*12,000 with F100 IF filter

**15 kHz on special order

Manufacturers of RENG equipment

Comrex Corporation

Box 269

Sudbury, Massachusetts 01776

617/443-5077

Marti Electronics, Inc.

Box 661

Cleburne, Texas 76031

817/645-9163

Moseley Associates, Inc.

111 Castilian Drive

Goleta, California 93017

805/968-9621

McMartin Industries Inc.

4500 South 76th Street

Omaha, Nebraska 68127

402/331-2000

Kahn Communications, Inc.

74 North Main Street

Freeport, New York 11520

516/379-8800

MARTI

Gives You Radio

ENG Power

ENG Power

ENG Power

ENG Power

- ★ Automatic Repeaters
- ★ Mobile Repeaters
- ★ Encoders and Decoders
- ★ Broadcast-Quality Hand-Carried Portable Transmitters
- ★ Broadcast-Quality Portable/Mobile Transmitters 25, 30, and 40 Watts
- ★ Base Stations
- ★ Complete Antenna Packages

Also . . .

ATS COMPATIBLE

Digital Remote Control and Status System

Also . . .

For the new generation of audio processing ideas . . . the

FLEXIBLE
AURAL **STL**

For complete details, phone or write:

817/645-9163

Box 661 • 1501 N. Main
Cleburne, TX 76031

MARTI Electronics, Inc.
Box 661 • 1501 N. Main • Cleburne, TX 76031 • 817/645-9163

For More Details Circle (23) on Reply Card

RENG: RPU Roundup

(Continued)

at \$650. Although it is designed for 110 volt operation, it could be used for return cue in a mobile RENG system by using an inverter.

Until recently, one of the problems in setting up a mobile RENG unit has been providing space and power for a rack mounted RPU receiver for the portable unit. It takes a pretty good receiver to maintain broadcast quality audio and reject spurious and image signals adequately. Remember that the receiver is going to be used at the scene of disasters and other events where there is a lot of communicating by police, firemen, CB, etc. We really don't want our big scoop of the week interrupted with "Breaker one-nine" and other similarly clever phrases.

Marti Electronics promises to introduce a mobile receiver for this application in the very near future. Monitoring, tone decoder, and audio filter for the sub-audible tone will be built in. The unit operates on 12 v.d.c. and is 3½ inches high by 14¼ inches wide by 13 inches deep. The price should be similar to their rack mounted receivers.

Sky Hooks—Antennas for RENG are readily available. You'll need a receive antenna to pick up the portable unit, and a transmit antenna for the RPU transmitter. The transmit antenna can be used for the required monitor receiver by switching with an antenna relay. Marti and Moseley both carry a line of RPU antennas. (See 1976 September Buyer's Guide, page 79 for complete list of RPU antenna manufacturers.) In most cases, communications type antennas serve the purpose very nicely. Even antennas designed for amateur radio work fine as long as they're trimmed to your operating frequency. Just keep an eye on the condition of the less expensive units. They tend to deteriorate faster than the more expensive commercial units.

An RPU "Footwarmer"—Moseley Associates manufactures an RF power amplifier that enables you to extend the range of an RPU transmitter. The AMP-3 provides 6 dB of gain for a VHF transmitter with an

output of 13 watts or less. The AMP-4 provides 5 dB of gain for UHF units under 10 watts. Both units require 12 volts for operation, and need no direct control. Application of RF drive activates the amplifier. The AMP-3 and AMP-4 sell for \$225 and \$275, respectively.

A QKT Cure—While somewhat out of the scope of this article, the Kahn Voice Line Reporter deserves mention if for no other reason than the fact that the unit is unique. The basic idea is that the low frequency information that would normally be lost on a low grade phone line is encoded and sent in a narrow notch at 2,000 Hz. The receiver strips the noise below 300 Hz and reinserts the 100 to 300 Hz information. Actually the Voice-Line has been out for several years, but the new model appears to be more ideally suited to RENG. An acoustical coupler for use with a standard telephone and a space to mount a cassette recorder make the unit look ideal for a newsman to carry. The 7½ pound unit sells for \$1,495 and requires an \$840 receiver to complete the system.

Space doesn't allow us to extend this discussion to peripheral equipment such as mixers, cassette recorders, etc. In general, there is a great need for field equipment that meets the specific requirements of RENG. One of the problems facing manufacturers is the relatively narrow market. To produce a cassette recorder that would meet our needs, the selling price would have to be up somewhere around a kilobuck. While some stations would feel the expense justified, most would continue to use consumer type equipment at about one tenth the cost.

For more information on any of the units described here, you may contact the manufacturers directly. Their addresses are listed here for your convenience.


The **Radio Workshop** would like to thank all of the manufacturers who have been very helpful, and in particular, David Ottalini, News Director, KWTC, Barstow, California, for providing a great deal of information on RENG.

Next month:
Get Ready For An FCC Inspection.

□

BROADCAST ENGINEERING

It takes guts to run your video through an Ikegami broadcast monitor.

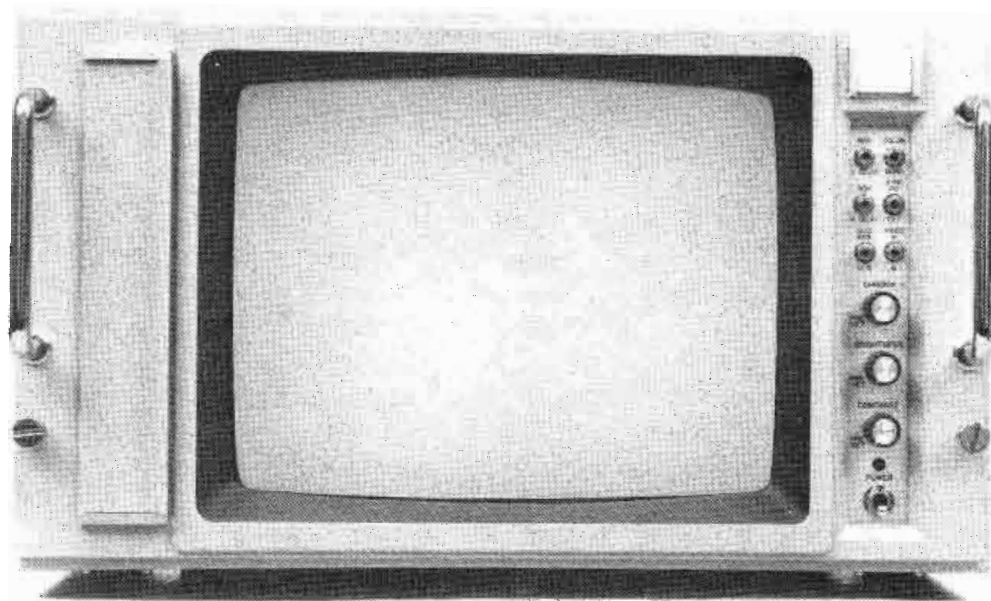

With twice as many image-making dots on its tube, an Ikegami color-tv monitor can show up in unnervingly high resolution a dozen or more things that could go wrong in your picture. Not just purple cows, but the smallest anomaly in linearity, the slightest picture distortion, the most marginal overload.

This one is our Model TM14-2RH. A comb filter helps maintain resolution to more than 600 lines. It gives you a choice of over- or under-scanned picture display.

Damage to its picture tube is prevented by power-protective circuits. Up front are all adjustments for its 14-inch CRT and inside are modular PC boards for simple servicing and maintenance. A keyed back-porch clamp system keeps the black level constant for maximum picture stability.

There are both pre-set and adjustable controls. Video response is from +1 to -2 dB from 60 Hz to 8 MHz.

It has extremely rigid, sturdy construction and is available in a free-standing cabinet or for standard 19-inch rack mounting. Its built-in degaussing circuit and magnetic shield to fend off external magnetic effects make it possible to move the Ikegami monitor without affecting its picture.

Also available from Ikegami are our Series Eight monitors for broadcast studios. There are four models, 25, 20, 16, and 14 inches. All use in-

tegrated circuits for high stability, long service life,

and very modest appetite for power. Their picture tubes have black matrices for maximum contrast and best color fidelity. A keyed back-porch clamping circuit keeps pictures stable with proper black level. Video response is +1 to -2 dB from 60 Hz to 5 MHz.

You can get an optional remote control for brightness, contrast, and chrome.

We really shouldn't have to give you all the specs. The name Ikegami alone is enough to tell you how good they are. But if you do insist on more, ask Ikegami. Ikegami, the leading manufacturer of ENG cameras, manufacturer of the best in studio cameras, and now the best in monitors, too.



Ikegami

Ikegami Electronics (USA), Inc., 29-19 39th Ave., Long Island City, N.Y. 11101. (212) 932-2577

Directional Antenna Basics

Part 2 of a Series/By Robert A. Jones

This is Part II of our continuing series on the understanding and design of directional antenna systems. In this part I will direct your attention to the simplest of directional antenna patterns, the basic two-tower.¹

Need For Directionals

At this point it might be interesting to look at some of the reasons or necessities for installing directional antennas. By far the most common reason is the need to protect a station already on a channel. Designing a DA to obviously interfere with a fellow broadcaster is not considered "playing the game." In other words, all new stations must afford protection to existing stations.

A second common reason for the use of directional antennas is stations seeking power increases. These would be cases where a straight non-directional power increase would overlap some other station.

A third reason, not as common as those above, would be to prevent useless radiation over areas where no people live. A classic example

would be a non-directional station located on the sea coast.

Basic Pattern Concepts

Figure 1 shows the typical pattern with its ground system. This is identical to that in Part I and is redrawn to show the comparison of this to our mathematical approach. You were hoping we could do it all without math? Sorry. I'll try to keep it simple and explain every term and/or step and give examples by using actual stations' patterns.

Figure 2 represents the vector approach to this same two-tower directional pattern. Picture the view looking down from an airplane at 1000 feet over the top of the array. The tower signs represent the top view of the towers. Now take an engineer and place him on the ground at a distance of a mile away, at some angle (Θ) off the tower line. This engineer uses his field intensity meter to measure the "total signal" so that he can tell us what radiation we have at his particular bearing. If we had this engineer walk a circle around our pattern, taking readings of signal intensity at every 5° point, we could

plot his readings and "see" the complete shape of our directional pattern.²

In design with the use of simple mathematics, we can predict the signal our engineer would measure had he stood one mile away in any given direction.

I said our engineer would measure the "total signal." Let me explain this term. Each tower radiates its own signal. In our example, two individual signals will arrive at the point where our engineer is standing. His field meter is not able to differentiate between the separate individual signals. He reads the combined signals. Hence the reading on his F.I. meter represents the "total" signal. If we had three towers, our total signal would be the vector sum of these signals, and so forth.

Oh-oh, what is this vectorial sum business? This is just a mathematical way of saying the two signals add in a relationship defined by the design of the pattern.

Point "P" in Figure 2 represents the spot where the engineer is standing with his field meter. Towers One and Two are marked
Continued...

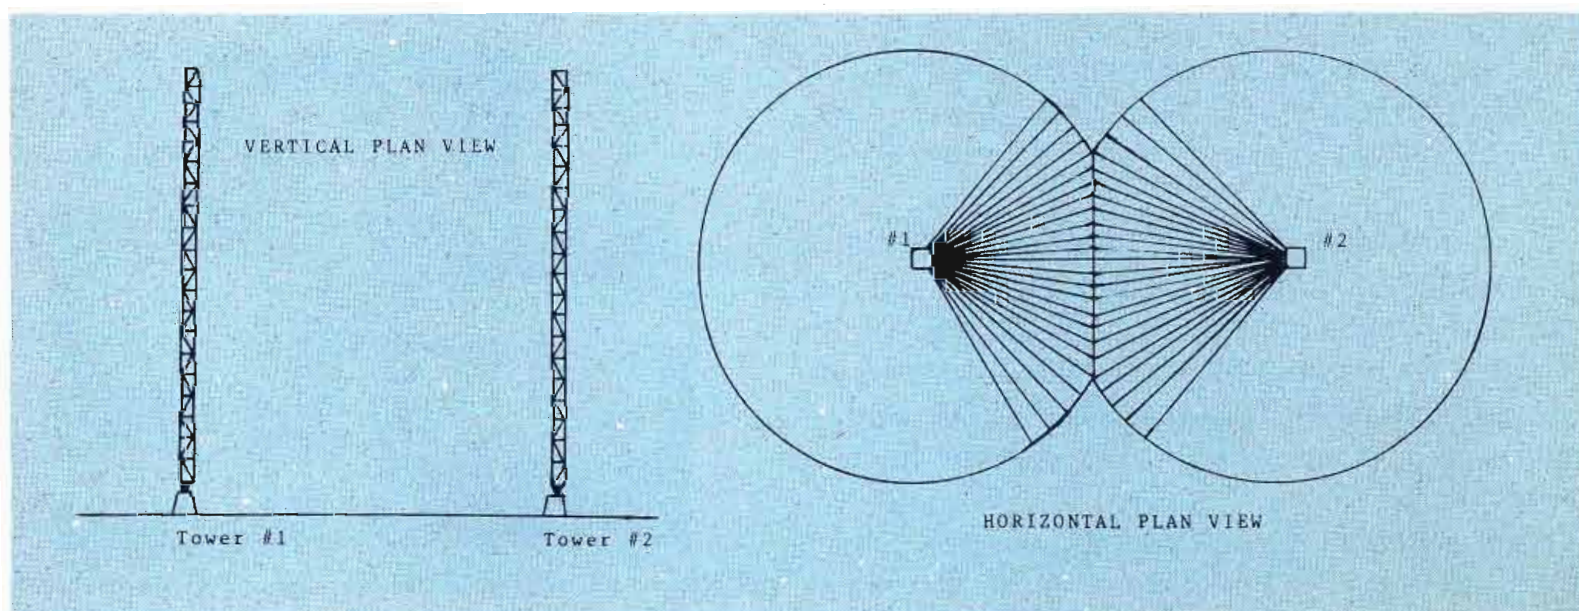


Figure 1.

audiopak A-2
BY CAPITOL

The broadcasters' choice for reliable playback.

audiopak A-2
BY CAPITOL
professional broadcast cartridge

The Audiopak® A-2 by Capitol® Broadcast Cartridge.

Broadcast engineers rely on Audiopak® A-2 Cartridges for good reason. All of the major components are assembled to get you from point A to point B. With efficiency and precision. For example, the constant-force, foam pressure pad assures unvarying head to tape contact over the life of the cartridge. The positive, non-slip brake mechanism locks the tape, rather than the hub, assuring accurate cueing and timing. The strong durable housing is yet another factor contributing to its reliability.

And to assure you of premium performance, each cart is individually tested —100%— for wow and flutter, electrical output, tension, and other properties. And because we manufacture the entire package—from tape to packaging—we can assure you of the highest possible quality control.

After all, no other tape manufacturer knows professional recording and duplicating needs better than Capitol.

AUDIOPAK® A PROFESSIONAL PRODUCT MANUFACTURED BY THE SAME PEOPLE WHO MAKE AUDIOTAPE®, AUDIOFILM™, AUDIODISCS® AND THE LEARNING TAPE™ BY CAPITOL®.

audiopak
BY CAPITOL



CAPITOL MAGNETIC PRODUCTS A DIVISION OF CAPITOL RECORDS, INC., 1750 NORTH VINE STREET, LOS ANGELES, CALIFORNIA 90028

For More Details Circle (15) on Reply Card

Directional Antennas

(Continued)

by appropriate numbers. The letter "S" represents the electrical spacing between the two towers, normally expressed in degrees. These two towers lie along the same tower-line, referred to as T.L.

The signal from Tower Number One to our engineer observer follows the arrow from #1, which in relation to the tower-line is an angle of Θ . The same angle is assumed to exist from Tower Number Two. Now you may say that the signal from Tower Two should not be the same angle since this can only occur if the two vectors are parallel. You are correct. However, in theoretical design we assume the path to each tower from the observer is parallel, even though in reality it is not. This is one of the concepts you may have difficulty accepting. I would qualify this by saying the design engineer assumes them to be parallel lines when he is standing at a distance of greater than ten times the tower spacing. The reason for this is that mathematically the sine and the tangent of angles less than 6° are equal.

Now that we have defined the terms, let's see what happens to the two signals. Tower One is our reference tower. So its signal is arbitrarily taken as the basis for comparing the signal relationships of all the other towers in any directional antenna pattern.

If we assume our engineer is standing at point "P", then the sum total signal he observes is the resulting addition of the two individual tower vectors. If we assume the two towers have equal currents, then the only thing which can affect the vector sum at point "P" is the phase relationship between the two signals. Two factors control this relationship. One factor is the phase angle between the currents induced into each tower. This is the angle you might measure on your station antenna monitor.

The other factor is the "space phase", due to the difference in the length of the paths from each tower to point "P". For example, if point "P" were at right angles to the tower-line (T.L.) the path lengths would be equal. If this same point "P" were along the tower-

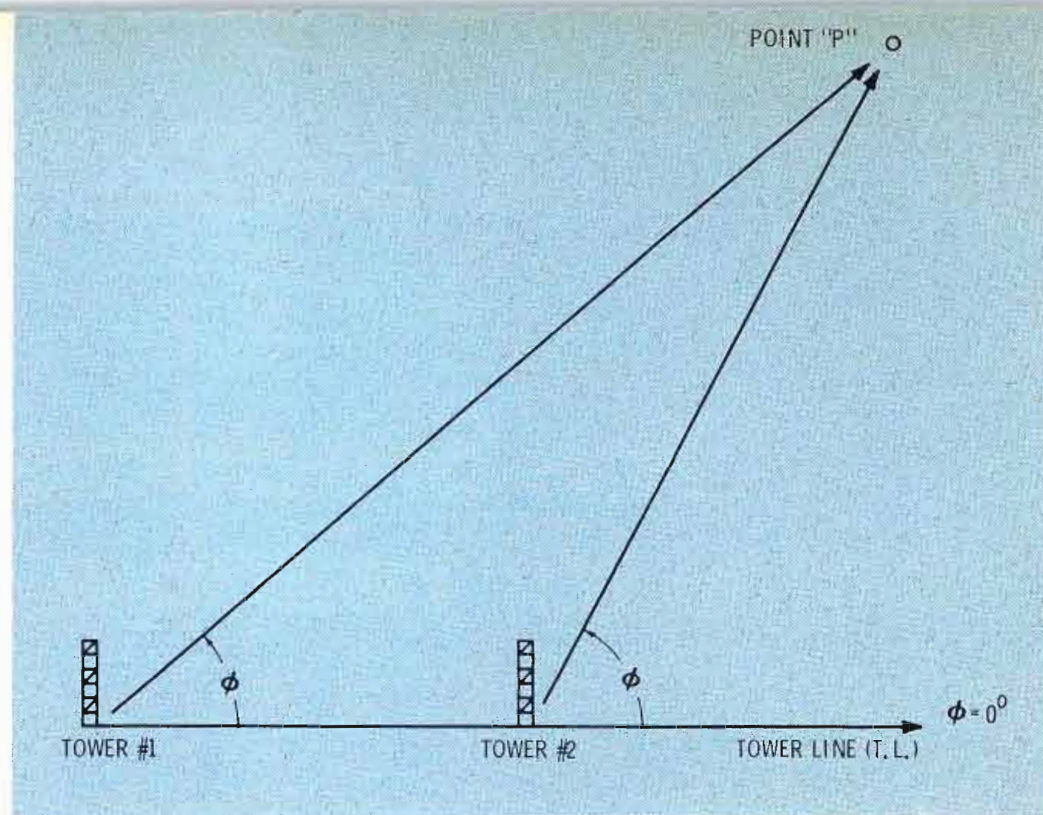


Figure 2.

the electrical spacing (in degrees) between the two towers. The reader can see that the "space phase" will vary between zero and S. The rate at which it varies can be expressed by this simple formula of equation 1.

$$\text{Space Phase} = S \cos \Theta$$

The variation is the cosine of the angle (Θ) off the tower-line. Since Θ equals zero along the T.L., and the cosine equals 1.00, "space phase" equals "S". Also when $\Theta=90^\circ$, the cosine of the "space phase" equals 0, or the condition of equal path lengths. Thus our formula works.

This "space phase" relationship is shown in Figure 3. Point "X" is at the corner of a right triangle formed by the tower spacing and "S cos Θ ."

Obviously the distance from Tower Number Two is greater than the distance from Tower Number One by the length between point "X" and Tower Number Two. As shown, this length can be calculated by equation 1. All we need to do to predict the space phase for any given bearing to point "P" is multiply the term S by the cosine of the bearing angle, as measured from the tower-line.

I might point out here that computations for directional patterns having two towers need be calculated over just one-half of the circle. This is because any two-tower pattern is symmetrical about

its tower line. For example the "total signal" at 110° off the T.L. was to be the same as that at 250° , i.e. each side of the T.L. is the same at its corresponding angle. In other words, the right hand side mirrors the left hand side.

Now that we have all the terms, let's put them together and see the result. We have the combination of two signals or two vectors at point "P". The reference tower is always assumed to be a vector of 1.0 units in length lying at an angle of 0° . This is the vector #1 in Figure 6. The vector from Tower Two is the same length as Tower One, because we assumed equal currents. Tower Two's angle of relationship to that of Tower Number One's vector is affected by the two phases discussed above. These two factors are added as follows.


$$\beta = \Psi + (S \cos \Theta)$$

The first term is the Greek letter "phsi" and stands for the phase angle between individual currents, or the value you might read on your station's antenna monitor. This is a constant value for any given pat-

Continued...

References

1. Jones, Robert A.: *Two Tower Test*, Broadcast Engineering, February 1968.
2. Jones, Robert A.: *Aeronautical F.I. Meas.* Broadcast Engineering, March 1965.

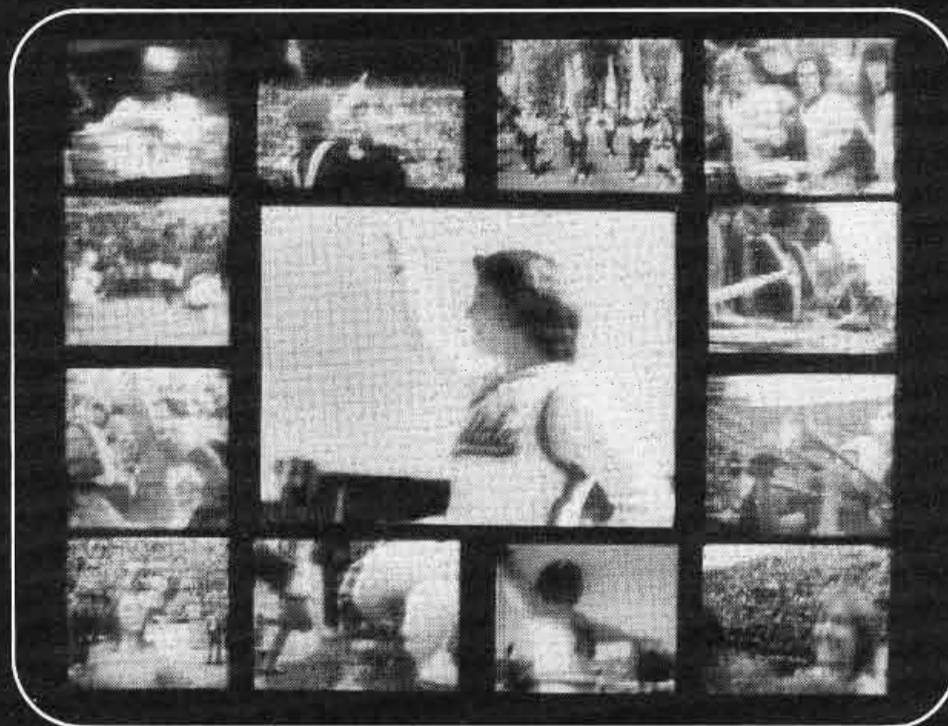

NCAA Football lead-in
courtesy of ABC Sports
and Image West.

GREAT MOMENTS IN DIGITAL VIDEO HISTORY.

THE FRAMESTORE SYNCHRONIZER BECOMES A TOOL FOR ENG AND PRODUCTION.

AND MICRO CONSULTANTS IS THERE WITH THE QUANTEL DFS 3000.

Our DFS 3000 is a lot more than a synchronizer. It makes ENG more practicable, more professional, more profitable than ever before.

It takes only 8¾ inches of rack space. Of course, it's also portable—and rugged enough to take the rugged treatment portable units get.

It makes production more vibrant than ever before. It lets you compress live images. Move them around with a "joystick." Freeze them. Run them through your switcher for special effects. Make hot cuts. Time base correct. And control everything from a remote panel.

It's been used by networks and local stations to enhance practically every recent major television event you can think of. The Olympics, the primaries, the political conventions, Seattle's Sea Fair, Monday Night Football, the Super Bowl, and more.

Local stations also use it to zip up their news programming. Production houses (like Image West) use it for innovative post production.

See for yourself. Ask for a demo in your own facility. Write or call Micro Consultants, Inc., P.O. Box 10057, Palo Alto, California 94303, (415) 321-0832.



The digital video people



Directional Antennas

(Continued)

tern. The last part of equation 2 is the space phase from equation 1. The Greek letter (β) "beta" represents the combined angle, at any given bearing, and expresses the angle between the Tower Number One and Tower Number Two vectors at point "P".

For example, when $\beta=0^\circ$, our resultant total signal is the sum of the two vectors, $I_1, I_2=2 I$ units. If however $\beta=180^\circ$, the vectorial sum will be 0 units. Thus the angle of β really controls the vectorial sum, which controls our pattern shape. If I assume $\psi=90^\circ$, and $S=90^\circ$, I would find the following vector sums shown in Figure 5, at $0^\circ, 45^\circ, 90^\circ, 135^\circ$ and 180° off the tower-line.

In the early days of designing directionals, many engineers simply plotted up the vector sums at 10° intervals and thereby determined their overall pattern shape. It is usually a bit more professional to compute these vector sums at 5° intervals, except in cases where a smaller angular change is important. In Table I the tabulation used to compute these vector sums is shown. The operation shown at the top of each column in Table I is performed, and each column in

Continued...

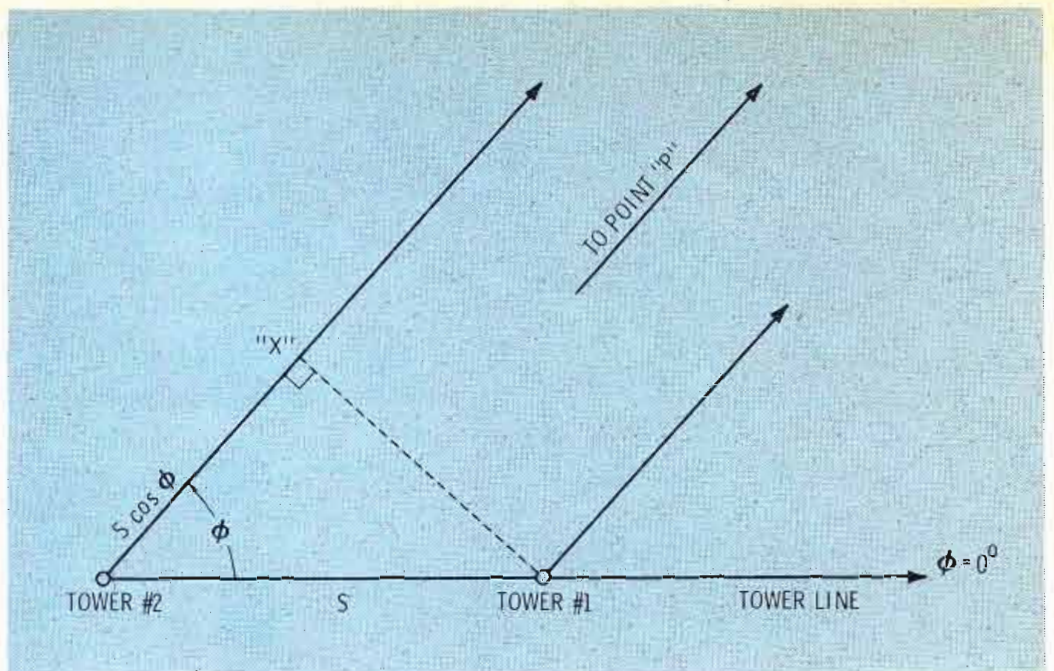


Figure 3.

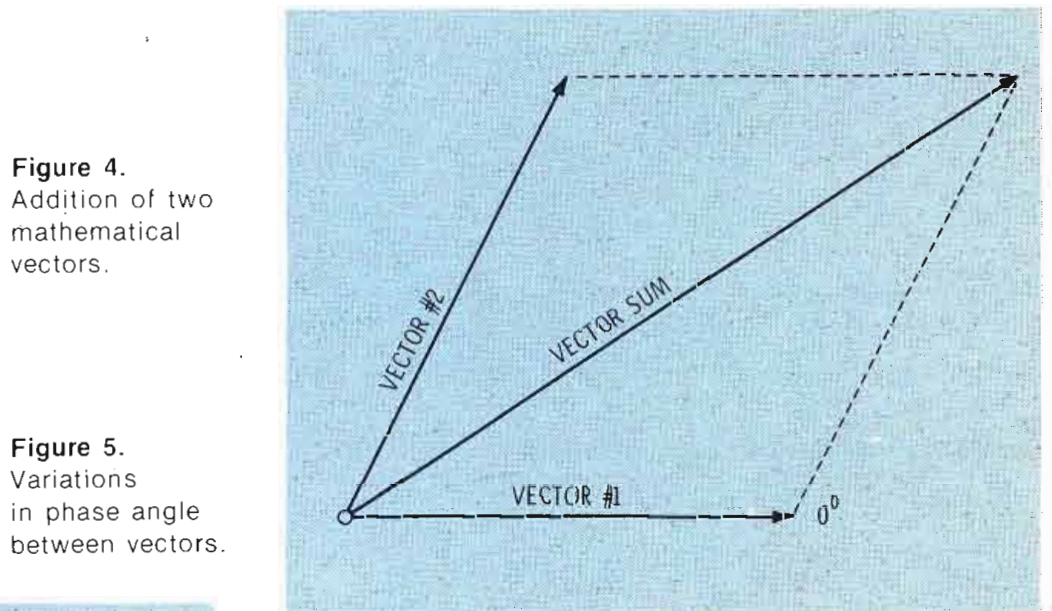


Figure 4.
Addition of two mathematical vectors.

Figure 5.
Variations in phase angle between vectors.



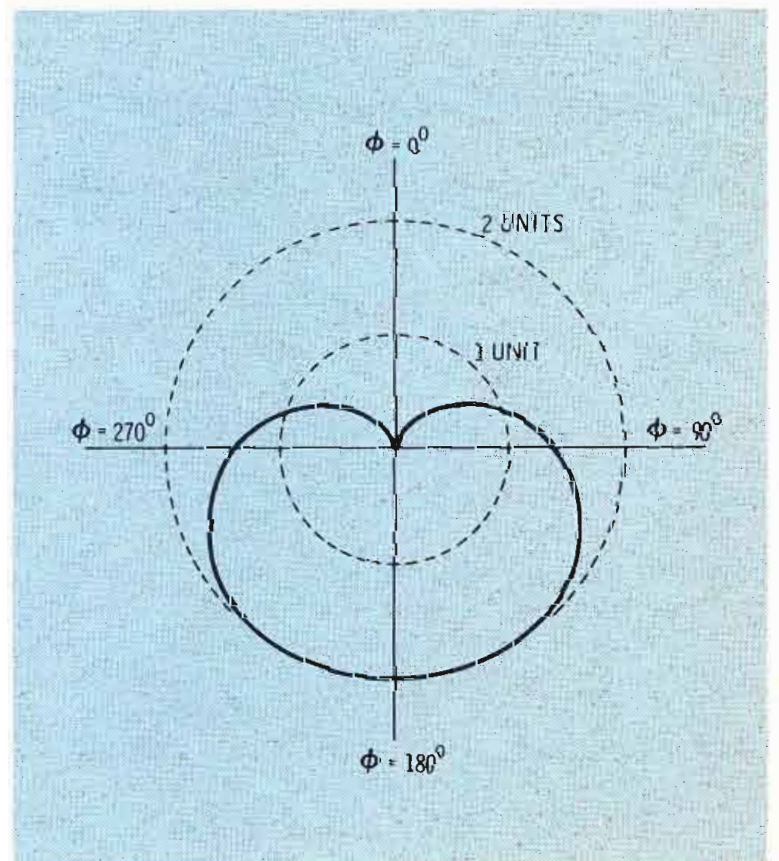


Figure 6.
Polar graph of unit vectors.

TABLE I
CALCULATING UNIT VECTORS

$$E = f(\theta) [F_1 / \theta^0 + F_2 / \psi + S \cos \phi \cos \theta]$$

$$\text{SUBSTITUTING} = 1.0[1.0 / 0 + 1.0 / 90^0 + 90^0 \cos \phi \cdot 1.0]$$

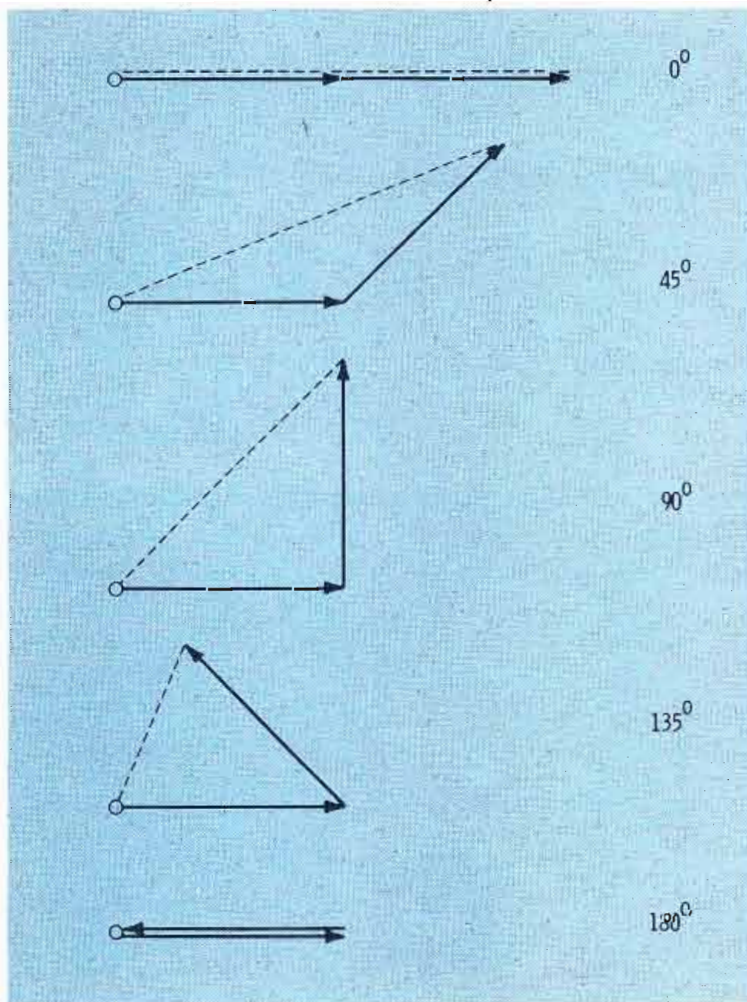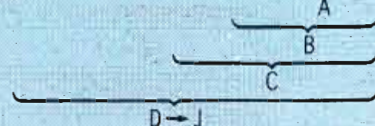

A	B	C	D	E	F	G	H	I	J*
ϕ	$90 \cos A$	$90 + B$	$\cos C$	$1 + D$	E^2	$\sin C$	G^2	$F + H$	$\sqrt{I}$
0^0	90.0	180.0	-1.000	0	0	0	0	0	0
10^0	88.6	178.6	-.999	.001	.000001	.024	.00059	.00059	.024
20^0	84.5	174.5	-.995	.005	.000025	.096	.0092	.0092	.096
30^0	77.9	167.9	-.978	.022	.00048	.209	.0439	.0444	.211
40^0	68.9	158.9	-.933	.067	.0045	.359	.129	.134	.366
50^0	57.8	147.8	-.846	.154	.0237	.533	.284	.308	.555
60^0	45.0	135.0	-.707	.293	.0858	.707	.500	.585	.765
70^0	30.8	120.8	-.512	.488	.238	.858	.737	.976	.988
80^0	15.6	105.6	-.269	.731	.534	.963	.928	1.462	1.209
90^0	0.0	90.0	0.000	1.000	1.000	1.000	1.000	2.000	1.414
100^0	-15.6	74.4	.269	1.269	1.610	.963	.928	2.538	1.593
110^0	-30.8	59.2	.512	1.512	2.286	.858	.737	3.023	1.738
120^0	-45.0	45.0	.707	1.707	2.914	.707	.500	3.414	1.848
130^0	-57.8	32.2	.846	1.846	3.408	.533	.284	3.692	1.921
140^0	-68.9	21.1	.933	1.933	3.736	.359	.129	3.865	1.966
150^0	-77.9	12.1	.978	1.978	3.912	.209	.0439	3.956	1.989
160^0	-84.5	5.5	.995	1.995	3.980	.096	.0092	3.989	1.997
170^0	-88.6	1.4	.999	1.999	3.998	.024	.00059	3.998	1.999
180^0	-90.0	0	1.000	2.000	4.000	0	0	4.000	2.000

*REPRESENTS LENGTH OF UNIT VECTORS

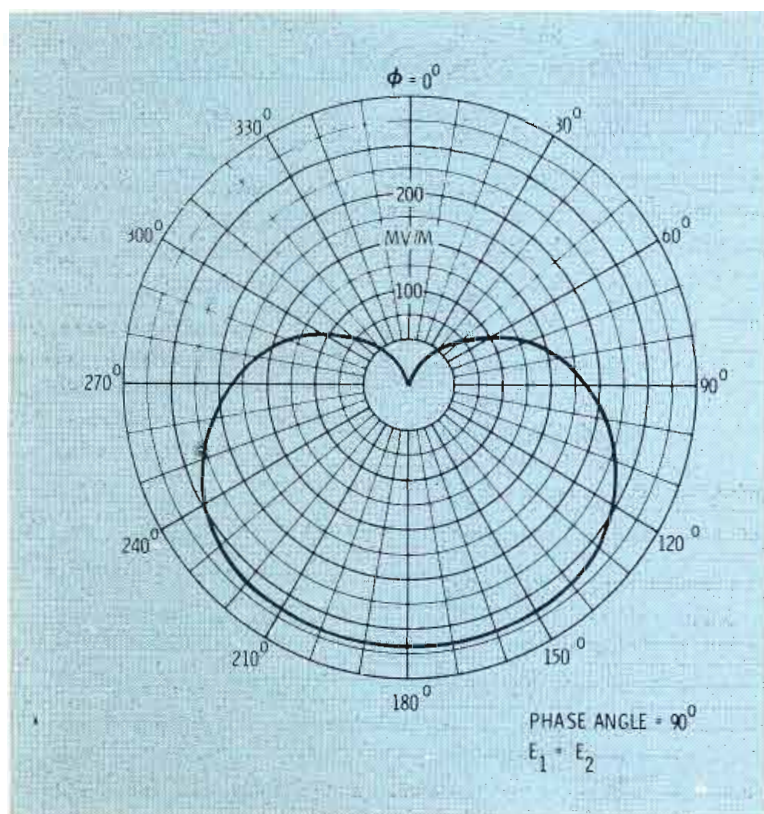


Figure 7.

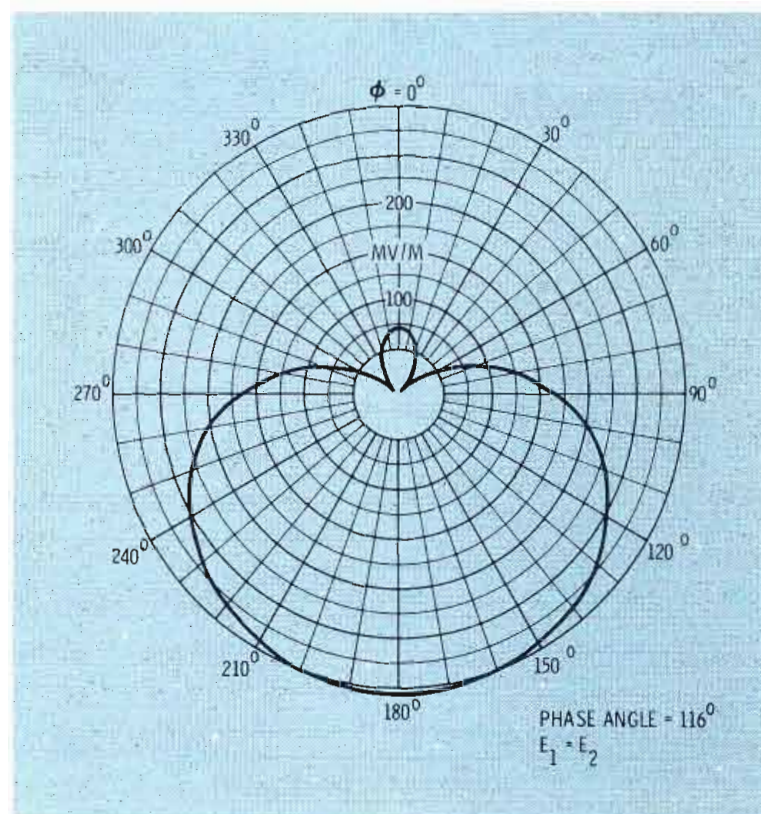


Figure 8.



Cameraman's Headset... Keeps the crew in touch

A professional TV Cameraman's Headset series specifically designed to interface with existing Western Electric circuits. Single side unit receives intercom only. Dual side, binaural unit receives intercom and monitors program. Carbon boom mike with optional push-to-talk switch. Designed for comfort and rugged dependability in every day use. Keeps the crew in touch—in or out of the studio. For complete information please write:

PRODUCTS OF SOUND RESEARCH
TELEX
 COMMUNICATIONS, INC.

9600 ALDRICH AVENUE SOUTH
 MINNEAPOLIS, MINN. 55420 U.S.A.
 Europe: 22, rue de la Legion—d'Honneur,
 93200 St. Denis, France
 Canada: Telak Electronics, Ltd., Scarborough, Ontario

36 For More Details Circle (16) on Reply Card

TABLE II
 CONVERTING UNIT VECTORS TO F.I.

$$E_T = K [E_{unit}] MV/M$$

A	B*	C	D		
ϕ	E_{unit}	B^2	$K \cdot B$	38.056 x 2	(19 BEARINGS)
0°	0	0	0 MV/M	76.112	(38 BEARINGS)
10°	.024	.00059	3.2 "	-0.0	(-FIRST BEARING)
20°	.096	.0092	12.9 "	-4.0	(-LAST BEARING)
30°	.211	.0444	28.4 "	72.112	(36 BEARING)
40°	.366	.134	49.3 "		
50°	.555	.308	74.8 "		
60°	.765	.585	103.1 "		
70°	.988	.976	133.2 "		
80°	1.209	1.462	162.9 "		
90°	1.414	2.000	190.6 "		
100°	1.593	2.538	214.7 "		
110°	1.738	3.023	234.3 "		
120°	1.848	3.414	249.1 "		
130°	1.921	3.692	258.9 "		
140°	1.966	3.865	265.0 "		
150°	1.989	3.956	268.1 "		
160°	1.997	3.989	269.2 "		
170°	1.999	3.998	269.5 "		
180°	2.000	4.000	269.6 "		
		38.056			

*COLUMN J FROM TABLE I

$$K = \frac{196 MV/M/KW}{\sqrt{\frac{72.112}{36}}}$$

$$K = 134.8 MV/M/KW$$

Directional Antennas

(Continued)

turn is modified, or processed by the next adjacent one. Column "J" represents the vectorial sum expressed in units. These are plotted on Figure 6.

Computing Power

In order to relate our unit vector pattern to some specific size we need to know the power of the designed station as well as the RMS efficiency of the pattern. For any given pattern shape we will have an RMS efficiency for 1 kW, for 500 watts, or even for 50 kW. The relationship between these RMSs varies according to good old "Ohm's Law". Normally we use the RMS at 1 kW as a standard, hence by simple Ohm's Law the RMS at any other power is the square root of that power divided by 1 kW, times the RMS at 1 kW. This is shown in equation 3.

$$RMS(X \text{ Power}) =$$

$$RMS(1 \text{ kW}) \times \sqrt{\frac{X \text{ kW}}{1 \text{ kW}}}$$

You may now ask how does one know what the RMS efficiency is for a given pattern? This is calculated by a formula known as the Bessel Function Method. For now let's pass over this step and see how you apply the RMS efficiency to the unit vector pattern you computed in Table I.

In our example, assume we calculated the RMS efficiency to be 196 MV/M for 1 kW, and we plan to operate at 1 kW. By definition, the RMS of any pattern represents the radius (in MV/M) of a circle which will contain the same total area as the area which is encompassed by our pattern. Thus the area of our pattern is πR^2 .

Continued...

Maximum Sound Performance In Harris' AM Transmitters. High Technology Working for You.

For the loudest sound and highest efficiencies in AM transmitters, Harris offers the new MW-A series.

Now included in the MW-1A, 1 kw, MW-5A, 5kW, and MW-50A, 50kW, transmitters is a built-in audio processing circuit.

This circuit is designed to increase loudness up to 3dB. When adjusted to


station format, small modulation peaks, which hold the average level down, are reduced, allowing the larger and more powerful levels of the audio signal to modulate the transmitter at the maximum limit.

The new MW-A series of transmitters with PSM*, MW-1A, and PDM*, MW-5A and MW-50A, offer other superior features...

- PA efficiency approaching 90%
- 125% positive peak modulation
- Low distortion
- Excellent transient response
- Wide frequency response

For complete information on the world's number one AM transmitters, write: Harris Corporation, Broadcast Products Division, Quincy, Illinois 62301.


* Patented

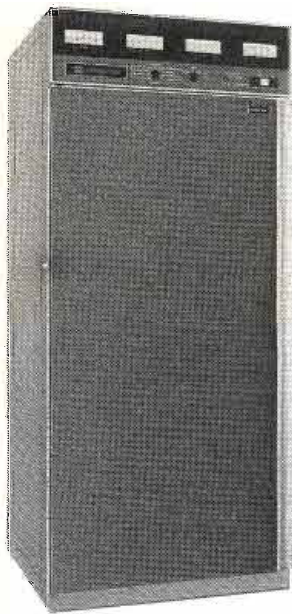


MW-1A, 100% solid-state one kilowatt transmitter



HARRIS
COMMUNICATIONS AND
INFORMATION HANDLING

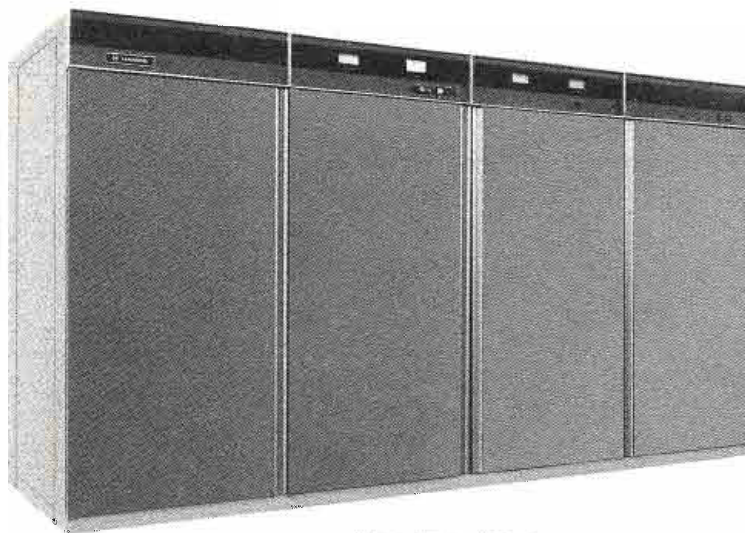

MW-50A, fifty kilowatt transmitter

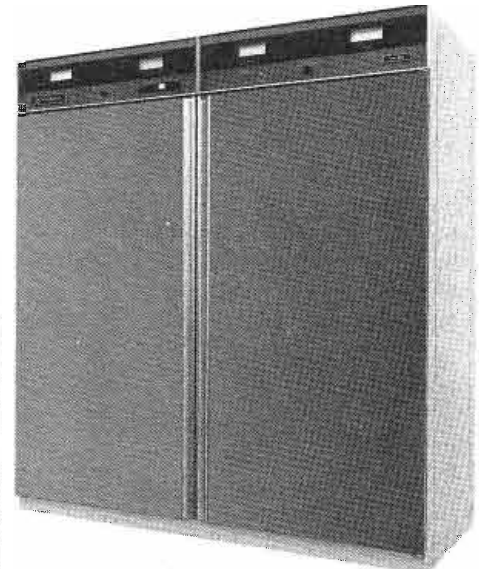

MW-5A, five kilowatt transmitter

For More Details Circle (17) on Reply Card

Directional Antennas

(Continued)

In order to convert our pattern shape to this area, we need a conversion factor. This is commonly referred to as "K". "K" is the constant by which each vector sum is multiplied to arrive at our final pattern expressed in MV/M. This is determined from equation 4.

$$K = \frac{\text{RMS efficiency}}{\sqrt{\frac{\text{RMS, unit vectors}}{\text{No. of bearings calculated}}}}$$

For the RMS efficiency in our example I assumed 196 MV/M. The number of bearings calculated, means the number we computed, normally 36. The RMS of the unit vectors is found by taking each of the individual vector sums, shown on Table I, column "G" for each of the 36 bearings; squaring that value; adding up the total, dividing by 36 and then taking the square root. In fact RMS stands for the root-of-the-mean-of-the-squares.

Table II shows how I've taken

the unit vectors of Table I, Column "G", squared them, added them, determined "K" by equation 4 and applied that factor to arrive at our final pattern. This is plotted on Figure 7.

Nulls And Lobes

If the currents in the two towers are not precisely equal, their individual vectors will not perfectly cancel at some bearing and cannot produce a pattern null having zero MV/M. In design the engineer will often use unequal currents in order to "fill in" a given null, thus giving a more stable pattern, and one that is easier to adjust, since I have yet to find anybody who can tune to a null of zero MV/M.

In our example we used a phase angle (Ψ) which gave us just one pattern null. If instead of $\Psi=90^\circ$, I had used $\Psi=116^\circ$, the resulting pattern of Figure 8 would be obtained. This example produces two nulls, with a minor lobe in between. Thus it is the phase angle Ψ which is important in producing the number of nulls, as well as their placement angle along the tower-

line. The current ratio, as noted, will affect the depth of the nulls and will also affect the amplitude of any minor lobes. As the nulls fill in, the lobes will grow.


Different Bearings

The reader should note that math angles are not the same as bearing angles. Mathematical convention established that math angles are measured counter-clockwise from the X-axis (east). Navigational Convention has established that bearings be noted clockwise, beginning at true north. This would correspond to a math angle of $+90^\circ$. Not only does each system have a different reference point, but the angles are measured in opposite directions. Conversion from one system to the other is therefore obvious.

In following months I'll expand upon this basic two-tower pattern by showing some of the modifications with their formulas, and how these result in shortcuts to computing the final pattern. In addition, some basic computer programs will be explained. $\square$



-SYMBOL OF PROFESSIONAL TAPE HEADS

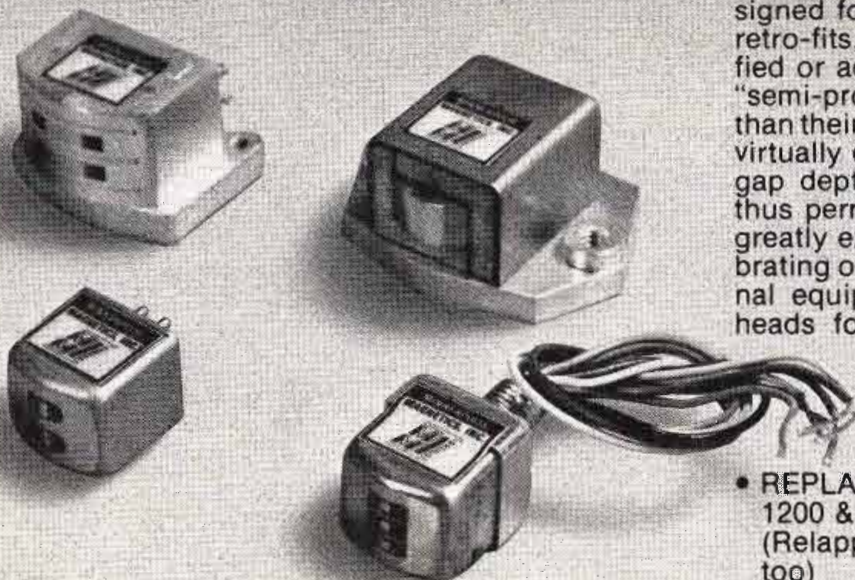

MMI Replacement Heads are professional heads — designed for the machines they will be used with — direct retro-fits, both mechanically and electrically — not modified or adapted heads originally intended for "home" or "semi-pro" recorders. But there is more to MMI Heads than their professional performance: An all-metal face that virtually eliminates oxide loading ... More than twice the gap depth-of-metal of some original equipment heads, thus permitting relapping (under normal head wear) for greatly extended head life ... Individual testing and calibrating of each head to insure meeting or exceeding original equipment specifications ... MMI has 1/4-inch tape heads for Ampex, ITC, Magnecord, Revox A-77, and Scully. Professional heads for professional recorders — from MMI.

ALSO FROM MMI
(PROFESSIONALLY, OF COURSE) ...

- REPLACEMENT AUDIO HEADS FOR AMPEX VR-1100, 1200 & 2000 VIDEO RECORDERS (Relapping and refinishing of the complete columns, too)
- HEAD ASSEMBLY REFURBISHMENT AND REBUILDING (Loaner Assemblies available for only the shipping costs)
- HEAD RELAPPING AND REFINISHING (No-Charge head evaluation)

NEW! MMI HAS HEADS FOR CART MACHINES!



Maximum Signal Performance In Harris' FM Transmitters with the MS-15 Exciter... for the Sound of the Century!

There's no doubt about it, your listeners will hear the difference with the new Harris 'K' line of FM transmitters featuring the MS-15 solid-state exciter, employing Digitally Synthesized Modulation (DSM)* and overshoot compensation. These advanced design techniques offer higher stereo separation, and increased loudness with no degradation of audio quality.

DSM affords the ultimate in stereo and SCA performance,

with 40 dB or better separation, 30 Hz through 15 kHz.

Modulation of the 19 kHz pilot and crosstalk into the subchannel are eliminated with this technique.


The new Dynamic Transient Response filter (DTR) allows no greater than 2% overshoot. Thus, a 2 to 6 dB increase in loudness can be achieved while maintaining excellent transient response, high stereo separation, low crosstalk and low intermodulation distortion.

For the clearest, loudest sound around, write for information on the new Harris FM transmitters with the MS-15 exciter to: Harris Corporation, Broadcast Products Division, Quincy, Illinois 62301.

*Patent applied for




HARRIS
COMMUNICATIONS AND
INFORMATION HANDLING

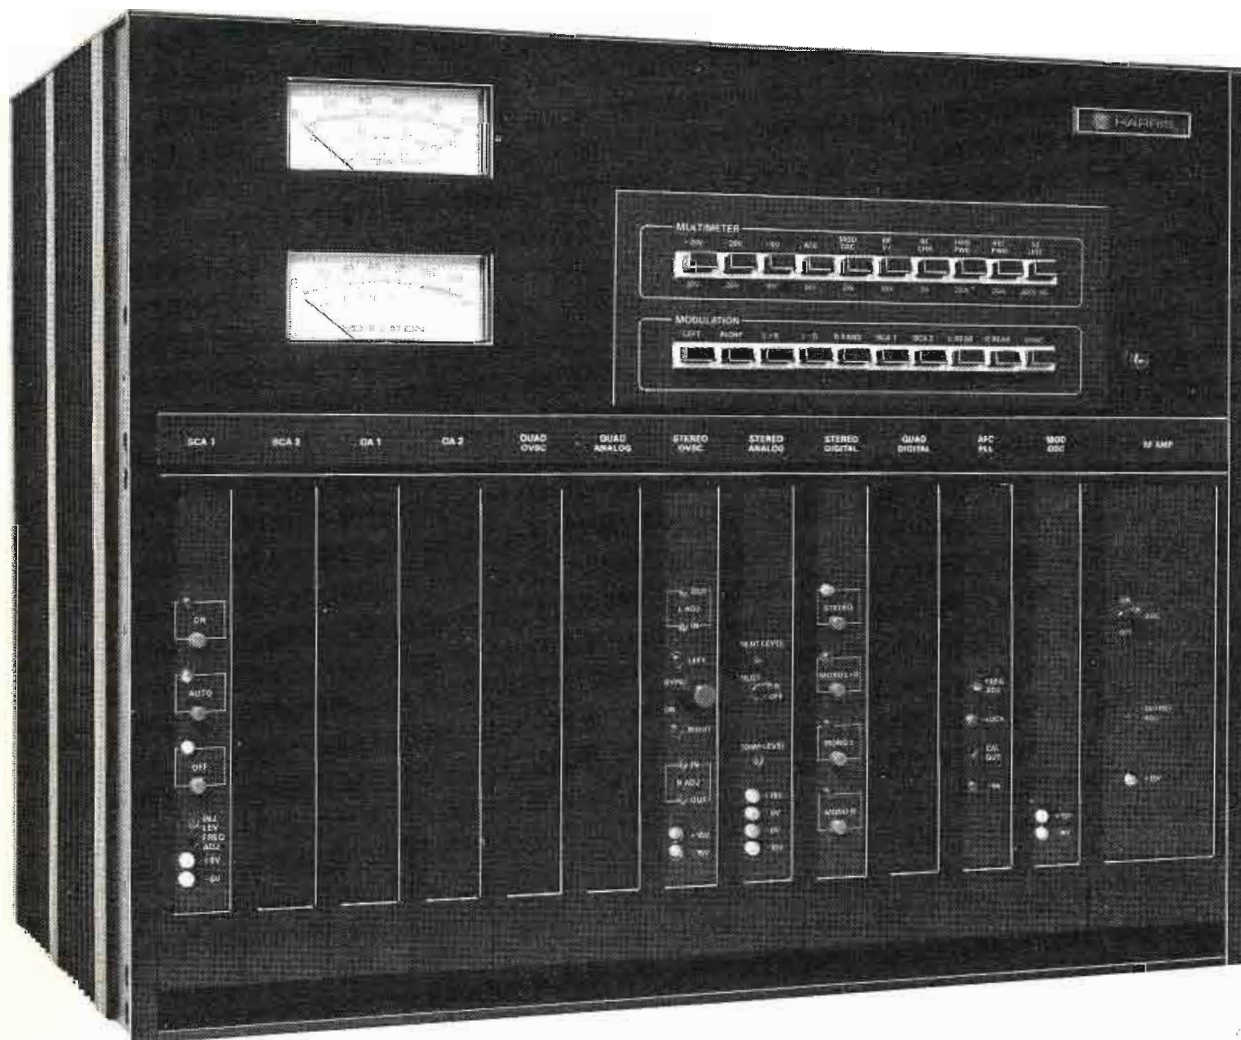

For More Details Circle (29) on Reply Card

Digital Framestore Synchronizers

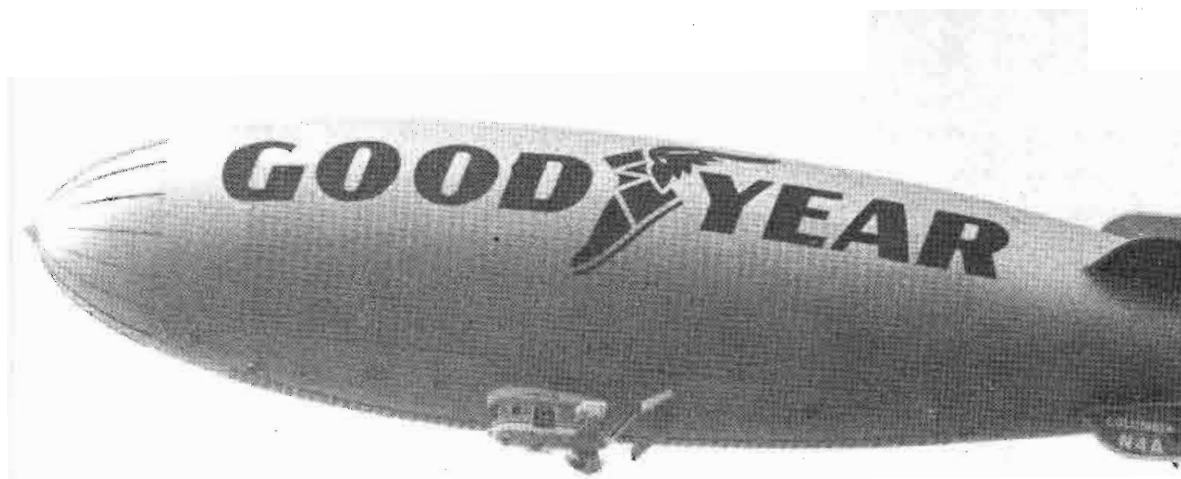

By Joseph Roizen

Photo by Donna Foster Roizen

If you were impressed by the incredible closeups of Frank Shorter during the Marathon in Montreal, if you wondered about the live remotes from the Republican National Convention, or if you were amazed by score overlays on TV pictures from the Goodyear blimp at the Superbowl, then you were watching all of these color images coming through one of television technology's newest marvels, the digital framestore synchronizer.

With all of their options, these newly compacted devices can synchronize wild feeds from any source, compress pictures into one quarter of smaller sizes, manipulate the video signal for unusual special effects, and even freeze single fields or frames when that is necessary or desirable.

Framestores are very new, the first one having been introduced to network television by NBC in April 1974 in connection with coverage of championship tennis in Germany. The NEC FS 10B used at that time was not only rack mounted; it occupied a full rack, stood six feet, nine inches tall and weighed in at 550 pounds. Even at that, it only stored one field at a time. In the three short years since this historic first, framestores have shrunk to more manageable size and weight. Currently, several models are nine inches tall and weigh less than 100 pounds. What is more important is that additional operation features have been added to the basic framestore capability so that wide window time base correction, veloci-

Continued...



Maximum Color Performance In Harris TV Transmitters with TSB. Because The Best is Getting Even Better!

Now--Maximum color performance...fewer adjustments...in the new line of Harris IF (Intermediate Frequency) Modulated TV transmitters, featuring the MCP solid-state visual exciter with TSB (Transversal SideBand) filter.

The latest state-of-the-art design techniques in the new visual exciter/modulator

include the TSB filter, which requires no group delay correction or tuning adjustments...ever! Only 1½ square inches in size, the filter is mounted on a PC board in the visual exciter. Harris transmitters are also ready for ATS.

For all this, plus great stability, reliability, and the truest color quality, check out

the new line of Harris TV transmitters.


For complete information write: Harris Corporation, Broadcast Products Division, Quincy, Illinois 62301.




HARRIS
COMMUNICATIONS AND
INFORMATION HANDLING



Harris' new TSB filter...actual size

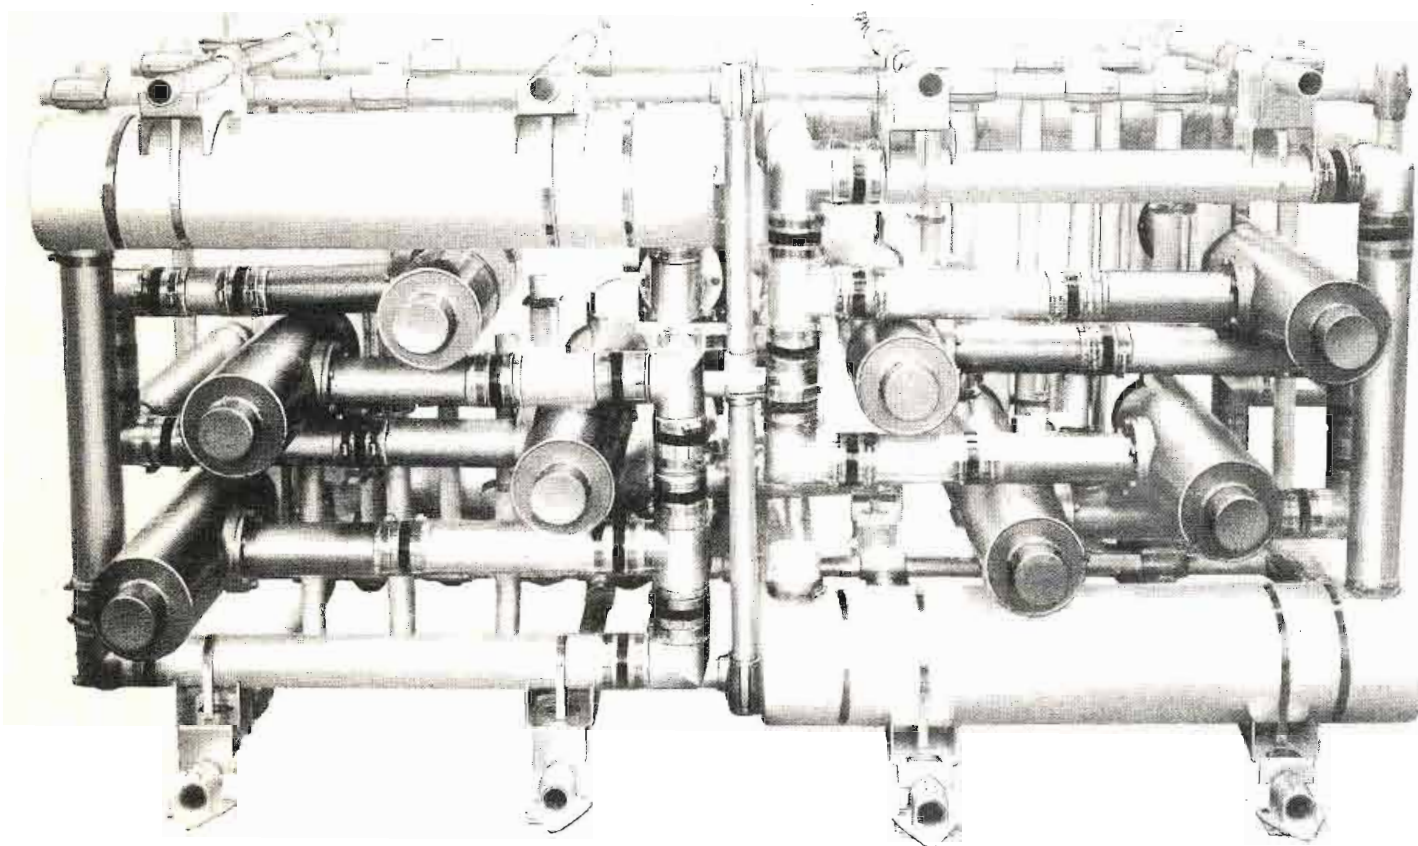

Conventional VSB filter... over 280 cu. ft.

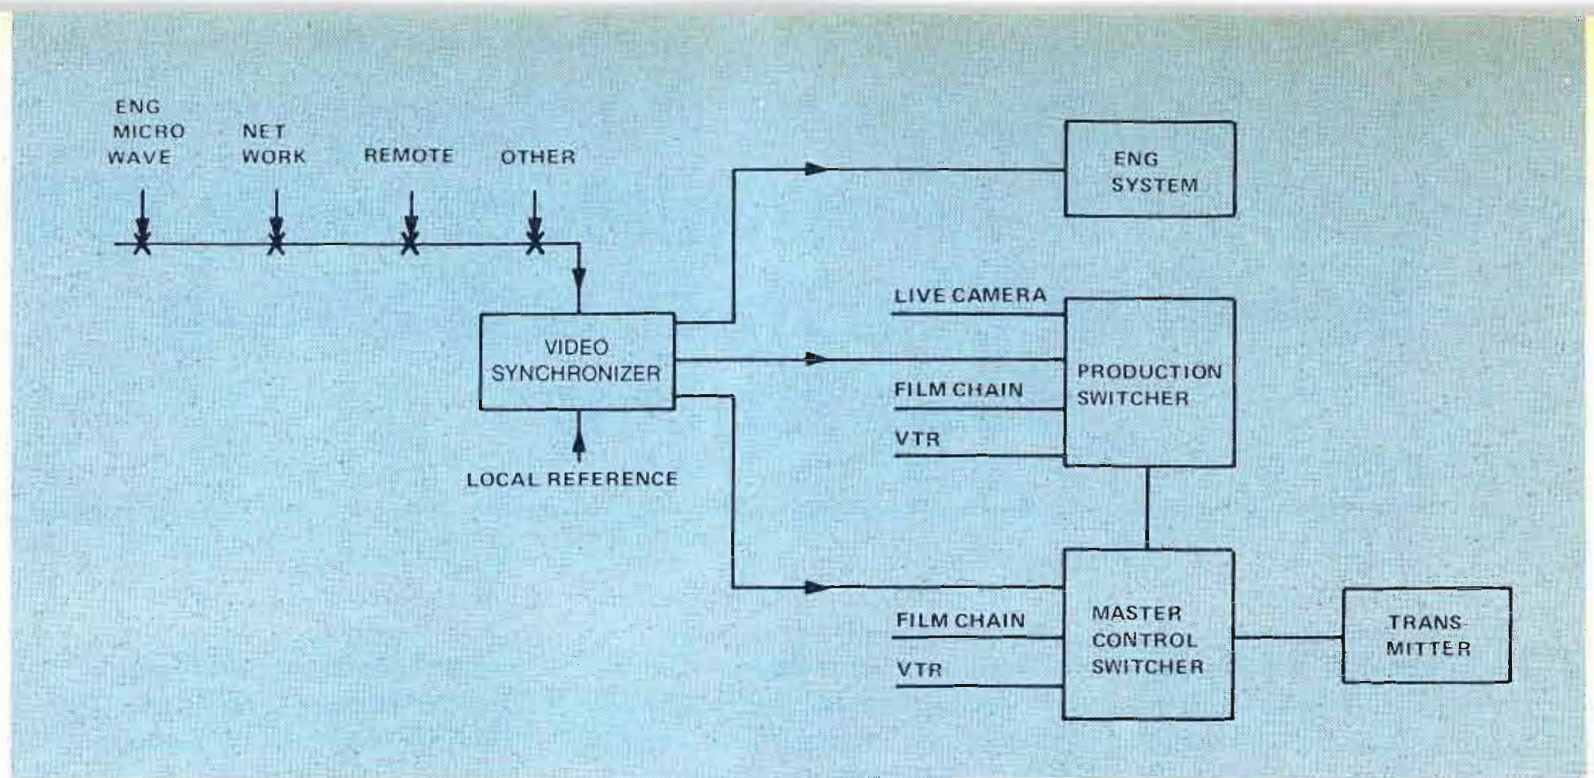

Synchronizers

(Continued)

ty compensation, video compression, image multiplexing, field/frame freeze and unusual special effects can all be done with these units depending upon the configuration or optional additions.

All of this has been made possible by the rapid strides in solid

state circuitry which have provided 4K random access memory (RAM) chips that are small and reasonably priced. Even now, a new wave of 16K RAMS will further improve the size/performance ratio of the newer framestores.

Digital framestore synchronizers

are not cheap; the entry fee is about \$50,000 and with all the bells and whistles, the price tag can go beyond \$80,000. The good news is that the DFS not only makes operations simpler and easier, but adds production capabilities which

Continued...

STOP!

DON'T GET LOCKED INTO AN AUDIO DA SYSTEM UNTIL YOU'VE LOOKED INTO THE NEW HOLLAND ELECTRONICS' SYSTEM 100

The HOLLAND ELECTRONICS, INC. SYSTEM 100 has been designed to provide the broadcaster with a reliable, high quality modular audio system that can fill a wide variety of needs at moderate cost.


SYSTEM 100 has been designed with the

careful attention to ruggedness and reliability that has earned HOLLAND ELECTRONICS an excellent reputation with the major networks!

For complete specifications, call or write:

HOLLAND ELECTRONICS, INC.
970 East 92nd St., Brooklyn, New York 11236 / 212-649-7330


- TOTALLY MODULAR
- FULLY TRANSFORMER COUPLED
- WIDE RANGE OF GAIN AND INPUT LEVEL

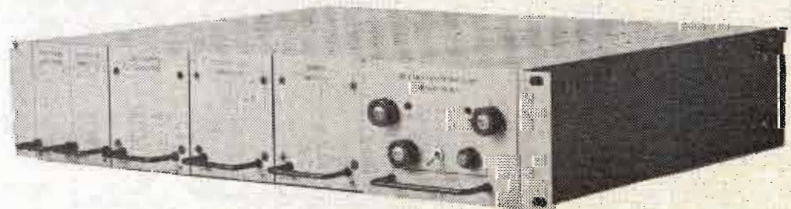

FEATURING: MODEL DA-100 DISTRIBUTION AMPLIFIER
MODEL UA-100 UNIVERSAL AMPLIFIER • MODEL PA-100 POWER AMPLIFIER

Microtime 2020*

A new signal processor
for better television pictures

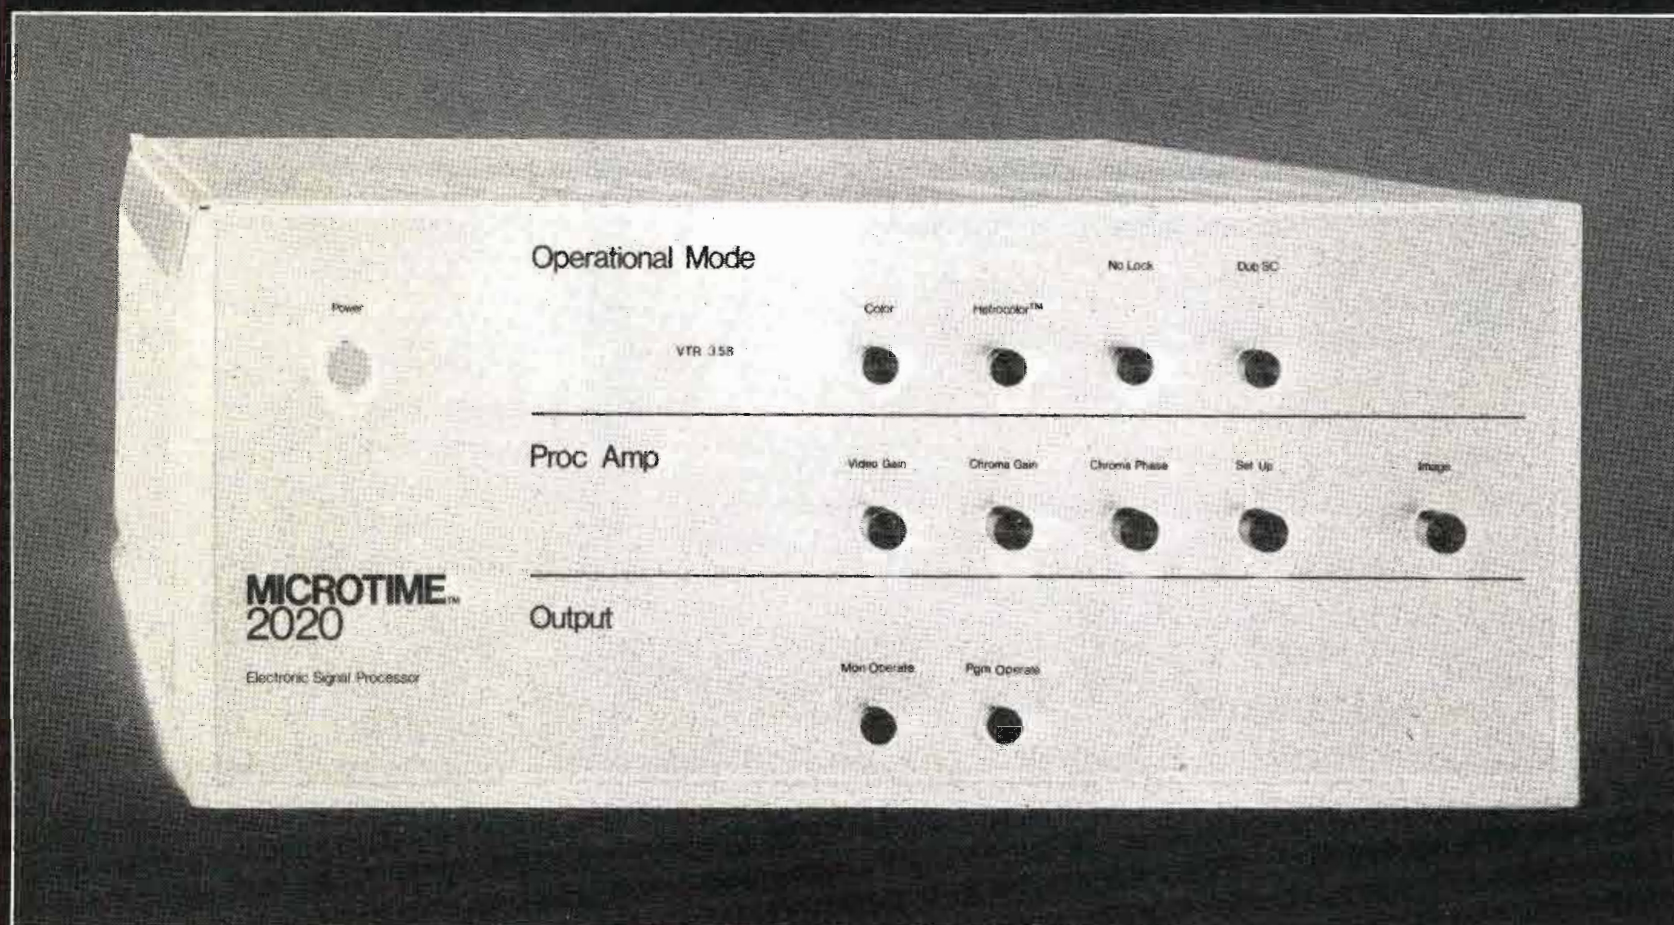

Corrects Time Base Error
Increases Resolution
Reduces Visual Noise
Improves Color Quality

* Available in PAL and SECAM

Microtime, Inc.
1280 Blue Hills Avenue
Bloomfield, Ct. 06002
(203) 242-4242 TWX 710-425-2390

MICROTIME

For More Details Circle (32) on Reply Card

Transmitters Love Our Modulimiter.

The Competition Will Hate Your New Sound.

The BL-40 Modulimiter is a unique automatic AM broadcast limiter, which will maximize modern transmitter performance. Whatever your format—hard rock to classical, Modulimiter will increase transmitter efficiency and extend coverage.

The BL-40's patented electro-optical attenuator provides smooth, unobtrusive, true RMS limiting. An ultra fast F.E.T. peak limiting section assures absolute protection from unwanted over modulation without peak clipping. Attack time is essentially instantaneous.

Three separate meters indicate RMS LIMITING, PEAK LIMITING AND OUTPUT LEVEL, simultaneously. All critical adjustments are behind a front security panel. A "phase optimizer" maintains most favorable signal polarity permitting up to 125% positive modulation without negative undershoot. "Its the limit" in today's broadcast limiters. UREI quality of course.


Available from your UREI dealer.



UREI

11922 Valerio Street
No. Hollywood, California 91605 (213) 764-1500

Exclusive export agent: Gotham Export Corporation, New York

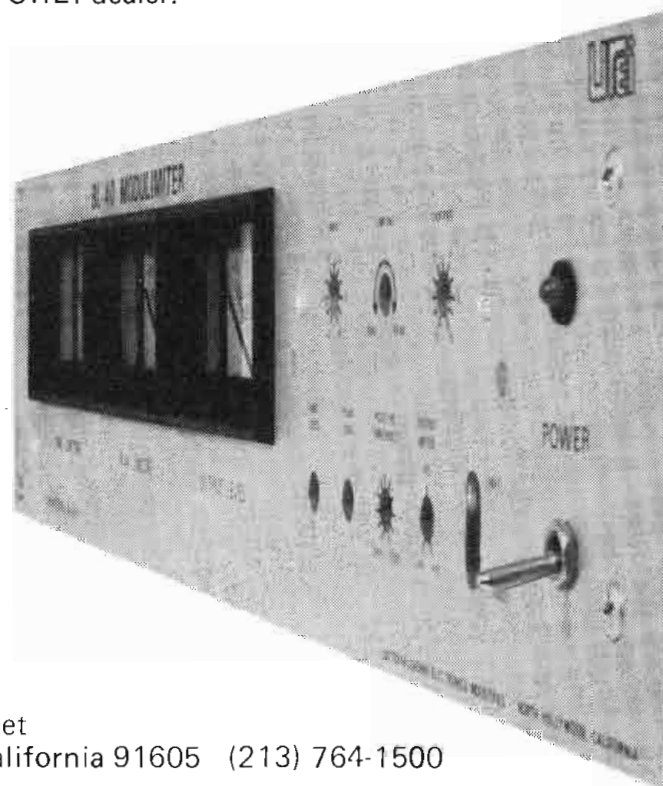

Synchronizers

(Continued)

are salable to clients, thereby warming the hearts of the station managers or accountants who are usually only interested in that magic term, ROI (Return On Investment).

DFS units are steadily moving into the broadcast industry in spite of their steep dollar thresholds. They are doing so because of what they do and how they do it, and while the four major manufacturers (NEC, Micro Consultants, RCA and CVS) claim varying features, the general principles are the same and will be described here.

Analog To Digital And Back

The first thing a framestore must do is have its video signals in digital form so it can store them in discrete uniform bits. The incoming video signal is sampled at three or four times the color subcarrier frequency (10.738 or 14,318 MHz) and converted into an eight-bit form. The analog to digital process is done by a coder and the conversion back to analog by a decoder. Since every framestore synchronizer or digital TBC needs such a pair, it is called a "codec" and represents a fundamental building block in the system. The codec simply accepts normal video, converts it to digital form, then converts the digital signals back into standard video at the output to feed the following equipment in the chain. A good codec degrades the video signal very little and experiments have shown that several cascaded codecs still produce an acceptable picture.

In an attempt to prove the limits of such A/D/A conversion, Ampex engineers put seven codecs in series before noticeable degradation began to appear. The current controversy in this field is whether the sampling rate should be at three or four times subcarrier. Proponents of the X3 method claim it costs less, needs less interconnects, and is more reliable. The X4 adherents point to improved resolution (due to more samples), less picture impairment allowing more conversions and sampling positions that sit on the quadrature points of the sub-carrier cycle. In particular, the last

Continued...

For More Details Circle (21) on Reply Card

BROADCAST ENGINEERING

MOVE OVER RCA. MOVE OVER COLLINS. MOVE OVER HARRIS.

You'll see new vitality at CCA. New thrust. New products. New people. Professional broadcasters who know where it's at — and how to get there.

A full line of AM, FM and TV transmitters. Our new and innovative circularly polarized, high power, broadband FM antenna. Our TV antennas. Our new solid-state, direct FM exciter. Our new Optimod/FM stereo generator processor. A new high-speed AM limiter. And, much more.

CCA continues its full line of broadcast consoles and accessories, featuring the modular CCA console line, plus our QRK consoles, turntables and accessories.

We have some surprises coming along, too. Some that will make you stop, look and listen — not once — but again and again.

It all adds up to The New CCA — on the move.

And we mean business. Visit CCA in Booth 201 at the Sheraton Park during NAB. You'll see we *really* mean business.

The New CCA!

CCA Electronics Corporation • 716 Jersey Avenue • Gloucester City, N.J. 08030
(609) 456-1716 — or call CCA toll free: 800-257-8171 for Sales and Service Telex: 84-5200
In Canada: (416) 438-6320 or call toll free: 800-261-4088

For More Details Circle (35) on Reply Card

Whatever your film chain, EEV can wrap up your Vidicon needs.

We have the tubes you need, when you need them. We can send matched sets—or singles selected for appropriate color channels. Full technical back-up service available. For technical data and details of our very competitive prices, contact us now.



EEV NORTH AMERICA

ENGLISH ELECTRIC VALVE NORTH AMERICA LTD.

1 American Drive • Cheektowaga, NY 14225
(716) 632-5871 • TWX: (710) 523-1862

67 Westmore Drive • Rexdale, Ontario M9V 3Y6
(416) 745-9494 • Telex: 06 965864

A member of the GEC-English Electric Group of Companies

Film Chain...

TK-21
TK-22
TK-26
TK-27

TK-28

PE-24

PE-240

PE-245

COHU-1500

EEV
Vidicons

7039

8488

7038

8488 V (1)

8134 W (3)

P8038 (2)

P8038B (1)

7035 (3)

8572A (4)

8572A (4)

8541A (3) or

P8038 (1)

P8038B (1)

Studio Camera...

TK-42/43

EEV
Vidicons

P803

P804

P805

plus P806

image intensifier



For More Details Circle (33) on Reply Card

NOW

6dB Greater Output
with **HOT TAPE**
exclusively from

FIDELIPAC

Cartridge tape quality equal to that of the finest professional reel-to-reel mastering types . . . HOT TAPE—High Output Transfer Tape—delivers up to 6dB greater output over types used in most broadcast cartridges to date. That means: dramatically reduced tape hiss . . . greater headroom for less audibility of audio system white noise components . . . increased signal saturation for decreased IM and other distortions. But, MOST IMPORTANT, you get studio perfect reproduction of music and commercial spots.

Hot Tape is available to special order in all factory loaded Fidelipac Cartridges or in bulk for reloading. For details, contact your Fidelipac distributor today or



FIDELIPAC

109 Gaither Drive • Mt. Laurel, NJ 08057 • (609) 235-3511

® Trademark

For More Details Circle (34) on Reply Card

Synchronizers

(Continued)

factor is supposed to provide easier manipulation of the digital bits if they are accessed by external devices for special effects.

Codecs are also getting smaller and less expensive. Using special hybrid ICs, Tektronix recently showed a new unit that was half the price and considerably compacted when compared with current units.

The Framestore

The active picture memory in a synchronizer can be either a field or framestore. The field store needs only half as much memory capacity, but it limits the flexibility of the entire unit. There is a half-line vertical displacement of the output under certain conditions because the rate of input versus output of the video signal is different. Field stores also cannot handle non-synchronous switches and can adversely affect the VITS and VIRS signals.

Most better synchronizers now store frames. Holding a clean field of video, they can hot switch to a new source without sync loss, vertical rolls, or horizontal tearing are eliminated regardless of the phase of the incoming non-synchronous video. This feature produces a curious effect when working with a remote signal which may fade or disappear for short periods of time. A sudden loss of signal will cause the framestore to freeze on the last good image and keep repeating it until a good new video signal is available, at which point it will unfreeze and continue as though nothing had happened. For remote pickups when the pictures are coming from a vehicle that may suddenly go through a tunnel or get into a microwave blind spot, this is a very useful feature.

A typical framestore has a solid state memory with a capacity for three or four million bits of information. Conversion at an eight-bit rate gives 256 discrete levels for the video signal. This is considered quite adequate for broadcast quality pictures.

Synchronizer Operation

Incoming video is separated into

Continued...

AUTO-EDIT

new for
R-MOD

No Cost Editing for Your Quad VTR

- Another FREE feature with R-MOD
- Extremely easy to operate
- Frame accurate assembly edits
- Provides for reliable remote editing
- No expensive time code required

R-MOD Extends Life and Adds Intelligence for Your Quads

R-MOD gives your quads the tape handling and other intelligent features of the latest quads at a low price.

R-MOD is the intelligent alternative to a new quad.

Now Available for

VR-1200 TR-22

VR-2000 TR-70

AVR-2 TR-600

new



VIDEO TAPE ADDRESSOR

- Off line high speed time code writer
- Writes both control and cue
- Saves VTR time
- Saves VTR heads
- Cleans and rewinds tape



VIDEO TAPE EVALUATOR

- Cleans and evaluates tape
- Pays for itself in a few months
- Evaluates tape 16 times faster
- Saves VTR time
- Times tape length—locates splice

RECORTEC, INC.

777 Palomar Ave., Sunnyvale, CA 94086
(408) 735-8821 TWX 910 339 9367

as seen at N.A.B.
and MONTREUX

Synchronizers (Continued)

two channels. Sync and burst are used independently to determine incoming time base errors and to address each picture point to its correct place in the memory. The stored signal which has come through the A to D converter can now be clocked out by a generator locked to studio sync and sub-carrier. Under these conditions, the framestore is a window of infinite length (since it holds a whole frame) and there is no need to genlock the studio to the remote signal since the framestore becomes the buffer between the two non-synchronous sources. As the digital signals leave the framestore, they go through a reverse conversion in a D to A converter which makes analog video out of them.

A video processor and sync pulse generator combine to form new sync, blanking and burst that are inserted in the video for a cleaner composite output signal. Having the video signal in a digital form obviously makes it possible to perform other functions on it, and

these include both the time and space domains.

Compression

Reading out the stored digital bits at rates not equal to the normal TV scanning standards will produce images that are compressed (or expanded) in size on the monitor screen. Manipulation of the relative read timing positions the compressed picture in any corner of the screen, thus providing an easy way to insert a commentator at a sports event without requiring special and delicate aiming of the camera. Even double compression can be done to get 1/16th images interspersed with 1/4 or full screen pictures. As the software systems develop to manipulate the digital video bits with ever increasing sophistication, it becomes possible to do many things that have hitherto depended on film for accomplishment. Already demonstrated have been framestore accessories which produce continuous compression from full screen to infinity, hall of mirrors effects, image turnaround in any

place, sectional magnification and many other computer-controlled effects too numerous to mention.

Applications

As an instant action tool, framestores get quickly assigned to doing those hot stories that American television is justly famous for. Much of ENG depends on integrating a live news feed from a remote camera into the studio's daily news coverage. Framestores avoid the danger of genlocking the studio to an outside source and add a smoothness to switching in or overlaying the wild feed without picture breakup. The ultimate use of this feature was at the Republican National Convention in Kansas City last August when CBS, using a flotilla of Minicams, Microcams and flash units, hooked up six framestores (one per feed) ahead of their switcher so that everything coming in was synchronous at the switcher input.

During sports or news programs when a commentator in one corner is an advantage, the compression feature makes it easy for the director to get the picture combination needed. No crayon marks on the viewfinder, no heads getting out of the frame with slight movement and no jangled nerves on the camera operator trying to corner the subject on the little monitor; instead, the full shot is shrunk proportionately and moved to the desired location with a joy stick.


In post-production on program or commercial material, the DFS really shines; for it can now electronically create a large range of effects that just a short time ago needed a film original and a week at the lab where the complex opticals were time consuming and costly.

Digital framestore synchronizers are here to stay, and as they become more versatile and more economical, they will spread to wider ranges of television operations in studios and production houses.

Acknowledgements

Information for this article was obtained from J. Brian Matley, Micro Consultants, Inc.; Robert Cobler, Grass Valley Group; and George Sekula, RCA. ☐

bench mark cartridge machines

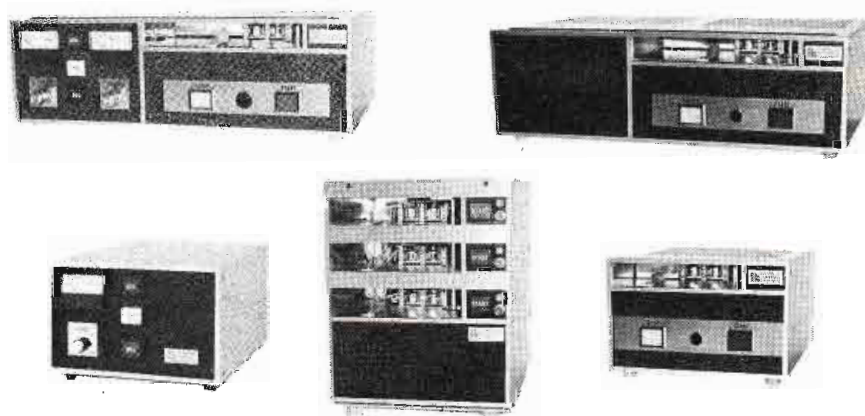

Measure all others against us

Other cartridge machines are copies of ITC's, but won't perform like ITC's. The differences are inside. Design innovations, master workmanship and superb customer services are ITC marks of leadership in quality cartridge equipment. We'll prove it with our famous 30-day guarantee of satisfaction. Write. Or phone us collect: 309-828-1381.

 **INTERNATIONAL TAPETRONICS CORPORATION**
2425 SOUTH MAIN ST., BLOOMINGTON, ILLINOIS 61701

Marketed in Canada exclusively by McCurdy Radio Industries Ltd., Toronto, Ontario
Form 113-0004

© 1975 by ITC

How did these broadcasters get ahead of the competition?



"The Compositor has excellent fonts-- they're clean, they are sharp-looking, and they are distinctive... we have as much memory storage as we're ever going to need. You can change directly from any page to any other page without any problem whatsoever-- you don't have to stick with the original sequence. The Compositor gives you super flexibility."—Don LaCombe, KING Production Manager

"The Compositor's on-air display is a marvel... head and shoulders superior to the competition. We've virtually discontinued using hotpress for supers."—Galen Daily, KRON Program Manager



"We used the Compositor for the first time on election night. We were very pleased with the clarity and color. I'm sure we had the best election show in town that night."—Donald Loose, Manager WTMJ News Operations

"We used our new Compositor system during the election and were very happy with it. It seemed to me that the character edging made our display easier to read than the competitions'. We moved ahead of the other stations soon after the election results started coming in."—Terry Harrison, KTVK-TV Engineer



"...the election went like clockwork--I couldn't have asked for anything better. The Compositor display is clear and easy to read...you just glance at it and you've got it. We were ahead of the competition getting numbers on the air."—Tom Craven, KGW Production Manager

"We were well ahead of the competition election night... the reason, I feel, was in large measure due to the Compositor. It's easy to use, and prevents a great deal of possible error. Where the TM unit really shines is its computer interface with the character generator, which eliminates the extra step of manually entering the election results."—Bill Gill, WOTV News Director



These broadcasters agree: with or without the TED election reporting option, the new Compositor I Titling/Graphics System offers a superior on-air look. With graphic-quality fonts and instant access to any page in memory at any time, the software-based Compositor I provides the fast on-air operation demanded by production personnel, the artistic quality demanded by advertisers, and the competitive edge that broadcast management is looking for. For details, please call Jack Daniels at (801) 972-8000.



TeleMation
the discovery people

P.O. Box 15068, Salt Lake City, Utah 84115

Compositor I

For More Details Circle (37) on Reply Card

SUPER REELS

Hannay makes super reels to handle broadcast and power cable for the bowl games, the Olympics and all of your special remote broadcast events. Choose standard designs or we'll custom build the reels you need.

Write for descriptive literature.



SEND FOR
YOUR FREE
CATALOG




HANNAY
REELS

CLIFFORD B. HANNAY & SON, INC., WESTERLO, NEW YORK 12193

For More Details Circle (38) on Reply Card

The frill is gone.

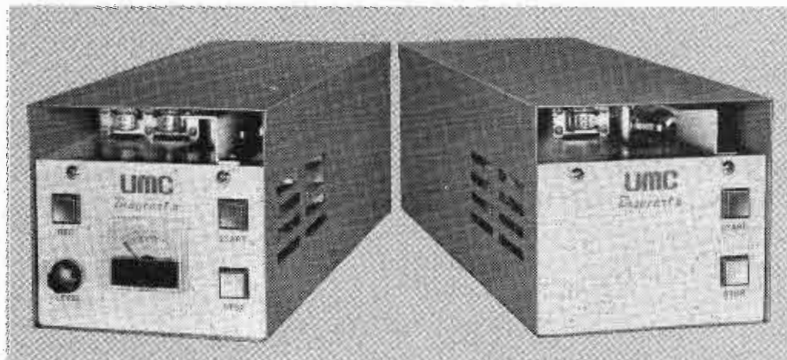

Beaucart II.

If you thought our original Beaucart® tape cartridge machines were something, just wait until you get a look at our new Beaucart II. Great features! No frills! And lower price! Meets or exceeds NAB specs, of course. Incorporates the unique Beau pancake motor and our own Beau audio heads. Mono Record/Playback or Playback only for A-size carts in a compact 5 3/4" x 15" x 5 1/4" machine.

Let us tell you all about Beaucart II today. Write for our free brochure or call (203) 288-7731. Beaucart will perform for you!

UMC

BEAUCART DIVISION
UMC ELECTRONICS CO.

460 Sackett Point Rd. North Haven, CT 06473

50

For More Details Circle (39) on Reply Card

PEOPLE IN THE NEWS

Lew Evenden, Director of Engineering for WPTV, Palm Beach, Florida, has retired after 20 years of service with the station. Lew was honored at a champagne-cocktail reception, attended by friends, family and staff, held in the studios. Honored guests included Donald L. Perris, President and Chief Executive Officer of Scripps-Howard Broadcasting Co.; Edward D. Cervenak, General Manager of WENS Television, Cleveland, Ohio; and Don Mercer, Vice President of Station Relations for NBC in New York. Perris presented Evenden with a silver plaque with a resolution of appreciation for his years of service with the company, signed by the board of directors.



Evenden was born, raised and educated in upstate New York. His hobby of radio became his life's work beginning in the 1930s when he became instrumental in the planning and installation of many radio stations on the east coast. With the advent of television, Evenden turned his interest to the video as well as the audio portion of the broadcast industry. He not only planned and built many television stations in the southwest United States, but in Cuba and Guatemala as well.

There have been many firsts at WPTV, and Evenden has played a vital part in all. It was Evenden who made it possible for WPTV to be the first station in Florida to place their master control room on a computer operation, not to mention the complete installation of a new transformer and facilities. In the early 1960s Evenden designed and supervised the building and operation of WPTV's first remote facilities using a microwave system. Evenden not only supervised the process of converting black and white television to color, but relocated complete studio facilities from Palm Beach to West Palm Beach in 1970.

William R. Gruenwald has been named Vice President, Marketing, for Harris RF Communications Division....**John A. Burtle** will be responsible for program automation product program as Broadcast Electronics' Director-Automation Products.

BROADCAST ENGINEERING

Andrew F. Inglis has been elected President of RCA American Communications, Inc., succeeding **Philip Schneider** who assumes the position of Executive Vice President, Operations and Engineering, for RCA Americom....**Neil R. Vander Dussen** has been promoted to Division Vice President and General Manager of RCA's Commercial Communications Systems Division....**J. Edgar Hill** is succeeding Vander Dussen as Division Vice President and General Manager of Broadcast Systems....**D. Gerald Smith** has been appointed RCA Broadcast Systems Sales Representatives for Nevada, Utah, southern Idaho, Oregon and northern California.

Leroy Wallace, a 30-year veteran in broadcasting, has been appointed Director of Television Products for CCA Electronics Corporation....**Howard L. Crispin** is promoted to Senior Vice President, Communications for Scientific-Atlanta.

Jay Luber has joined JVC Industries, Inc. as the District Manager for an area spanning Washington, D.C. to West Virginia....**Jerome W. Hull** has been elected to the Ampex Corporation's Board of Directors. He succeeds **Henry A. McMickling**, who has served on Ampex's board since 1948.

R. Dennis Fraser has been appointed Manager, Broadcast Equipment Division, NEC America, Inc....**Philip N. James** has been named to the new position of Director of Administration and Planning of Deluxe General, Inc.

Lee Tate, newly appointed President of the Tape-Athon Corporation has announced a restructuring of the firm's operations, and the appointment of a new management team. The staff will include **Wally Rubin**, Executive Vice President and Director of the Sales/Marketing Division; **Joe E. Otis**, Director of the Audio Products Division; and **Robert Haller**, Director of the Operations Division.

Bruce R. Pollack has been appointed Sales Administrator of the Professional Products Department of Sharp Electronic Corporation....**Bob Moore and Jerry Bauer** have been appointed as Sales Representatives for Tandberg of America, Inc.


S. L. Thomas is the new Director of Marketing for SC Electronics, Inc....**George B. Honchar** has moved from Director of Special Projects to Vice-President at Imero Fiorentino Associates, Inc.

Dr. Wesley T. Hanson, Jr., a vice president of Eastman Kodak Company and Director of the Kodak Research Laboratories, has announced plans to retire June 1. He will be succeeded by **Dr. Leo (Jack) Thomas, Jr.**, currently an Assistant Director of the Research Laboratories. Dr. Hanson received his BS and MS degrees from the University of Georgia and his PhD degree in chemistry from the University of California.

Dr. Hanson has received many honors for his scientific research including the Distinguished Inventor Award by the Rochester Patent Law Association citing his invention of the color coupler masking system that made Kodacolor film possible. He received the Herbert T. Kalmus Gold Medal Award from the Society of Motion Picture and Tele-


Continued on page 52

some inventions SAVE you TIME, WORK & MONEY

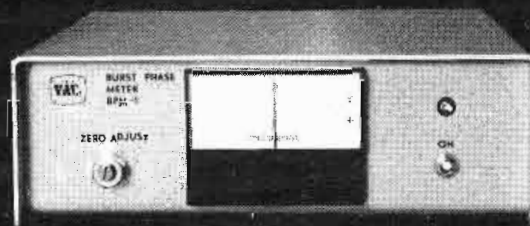


THIS ONE DOES ALL THREE

Color sub-carrier burst phase requires close attention to prevent visible color faults (objectionable hue shifts) during a production or duping. Especially if you want to keep normal fleshtones when using special effects, supers and chroma key during color productions. Phase shifts greater than 5 degrees can distort normal fleshtones creating visible color faults. This can result from mis-adjusted video equipment or from various cable lengths and amplifiers which create delays and different burst angles according to their location in a color video system. Phase shifts could also result from normal aging of various components throughout the video system. You can check for phase shift the old way or the VACc way.

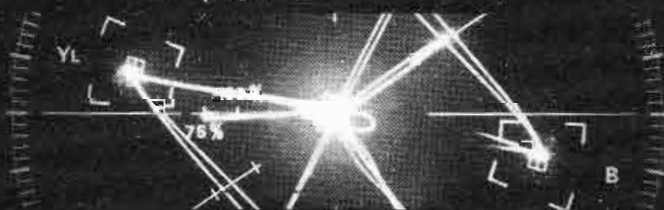

phase shift checked

the old way

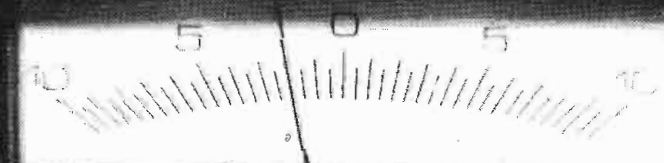

phase shift checked

the VACc way

VACc's Burst Phase Meter (model BPM-1) is a \$599.00 replacement for most vectorscope applications. The unit requires only ac power, video and subcarrier inputs. An easy-to-read analog meter indicates phase shift in the video burst relative to the subcarrier over a full 180 degree range with 1/2 degree accuracy. (360 degrees phase range can be obtained with a coax delay line).

NEW! You saw it at NAB...now available for immediate delivery.

H-Phase Meter

Option 02...includes Burst Phase and H-Phase...all in one unit! \$729.00 list.



USA (303) 667-3301
Canada (Toll Free) (800) 261-4088
VIDEO AIDS corporation of colorado
327 E. 7th St.
Loveland, Colorado 80537

Schneider

TV Lenses all over the world

TV Lenses for 1" Plumbicon Cameras

5 × Standard	1.7/25-125
10 × Studio	2 /17-170
11 × Studio/OB	1.7/14-150
13 × Studio	1.7/14.5-190
15 × wide angle	1.7/12.5-190
20 × Special	2 /17-340
30 × Standard	1.7/16-480
30 × wide angle	1.7/12.5-375
30 × Tele/OB	1.7/26-800

TV Lenses for 1 1/4" Plumbicon Cameras

11 × Studio/OB	2.1/18-200
13 × Studio	2.1/18-235
15 × wide angle	2.1/16-240
30 × Standard	2.1/20-600
30 × wide angle	2.1/16-480
30 × Tele/OB	2.1/33-1000

TV Lenses for ENG Cameras

6 × Standard	1.8/12.5-75
10 × Special	1.8/10-100



Jos. Schneider & Co., Optische Werke
 ☐ 947 · D-6550 Bad Kreuznach
 ☎ 0671/6011 · ☐ 042800



Glenn H. Lahman, Pittsburgh, and John M. Lyons, New York, received the highest honor conferred by the Society of Broadcast Engineers when they were named SBE Fellows at the Society's annual membership meeting, March 27, in Washington, D.C. This status is reserved for engineers who have rendered conspicuous and distinguished service to the Society. The election of Lahman and Lyons to this level brings the number of such Fellowships awarded to sixteen.

Lahman, engineering manager of KDKA/KDKA-TV, has just completed two consecutive terms as president of SBE. Lyons, facilities planning engineer for Riverside Broadcasting Corporation, is beginning his fourth year as a member of the Society's board of directors and has been instrumental in the success of three New York City SBE Regional Conventions. Both men have served significant terms as chairmen of their respective SBE Chapters.

Other broadcast engineers who have achieved Fellowship during the Society's 13-year history are: Glenn Boundy, Miami, Fla.; Albert Chismark, Fayetteville, N.Y.; Harold Ennes, Beech Grove, Ind.; Robert Flanders, Indianapolis, Ind.; Charles Hallinan, Binghamton, N.Y.; Harold Kassens, Washington, D.C.; Leo Reetz, New York, N.Y.; Joseph Risse, Scranton, Pa.; Orville Sather, Teaneck, N.J.; Lewis Wetzel, Casco, Me.; Martin Williams, Indianapolis, Ind.; John Wilner, Trenton, N.J.; Benjamin Wolfe, Baltimore, Md.; and James Wulliman, Milwaukee, Wisc.

Membership Response

The SBE ex-officio Executive Committee held a special meeting in February to find ways of more efficiently responding both to members and to potential members, particularly in the following areas:

People

Continued from page 51

vision Engineers in 1956, the Progress Medal Award in 1966, Honorary Masters of Photography Degree from the Professional Photographers of America in 1958, and the Progress Medal Award from the Photographic Society of America in 1976. He holds several patents and has written for numerous scientific and technical publications.

The Board of Directors of the National Cable Television Association has announced the results of elections for four officers who will lead the association during 1977-1978. Elected were: **Daniel Aaron**, Vice President and Co-founder of Comcast Corp., Bala-Cynwyd, Pennsylvania, Chairman; **Robert Hughes**, President of Communications Properties, Inc., Austin, Texas; **Edward M. Allen**, President of Western Communications, Inc., Walnut Creek, California, Secretary; and **John C. Malone**, President of TeleCommunications, Inc., Denver, Colorado, Treasurer.

- Applications for new membership
- Status of candidates for "grandfathered" certification
- Information about the certification examination program
- Chapter information
- General questions addressed to the Society's National office

The response to the Senior Broadcast Engineer "grandfathered" certification program has been so tremendous that the Indianapolis office has been literally inundated with applications. As a consequence, normal communication with the membership has suffered some unavoidable delays. Therefore, the ex-officio Committee has authorized an expansion of the Indianapolis office. We will not only add space, but we will also hire an additional person whose job it will be to handle membership and Chapter correspondence. In addition, we have approved the hiring of a third person who will be responsible for the paperwork resulting from the certification program, both in the "grandfathered" phase and in the soon-to-be-implemented examination phase.

The SBE National headquarters will continue to function under the direction of R. Michael (Vince) Flanders, assistant secretary-treasurer of the Society of Broadcast Engineers.

Qualifying Exams

Preparation of the certification examination is nearly complete. Jim Wulliman is shooting for finalization by April 15, with the first nationwide qualifying exams to be given on or about June 15. SBE is working with the University of Wisconsin-Milwaukee to evaluate the testing procedure, rather than with the Educational Testing Service, Princeton, New Jersey, as reported earlier.

SCTE Relocates In D.C.

Effective April 1, 1977, the Society of Cable Television Engineers will relocate its national headquarters in Washington, D.C. under the direction of Judith Baer, SCTE's executive director. For the past several years, the Society has been headquartered in Ridgefield, Connecticut, with supplemental support from Baer in the metropolitan Washington area.

Robert Bilodeau, vice president of engineering at Suburban Cablevision and president of SCTE says, "With the Communications Act rewrite about to get underway, the new administration and changes forthcoming within the Federal Communications Commission, it makes sense that SCTE should establish itself in Washington." Founded in the late 1960's by a handful of CATV industry engineers and technical personnel, SCTE has grown to be the largest individual-membership organization in the cable television industry. "Our greatest period of growth has been within the past twenty-four months," Bilodeau continues, "but that's just a start toward realizing our goals and potential."

SCTE will staff its new offices with sufficient clerical support to service the Society's membership requirements. Beginning at the April 1 date, the Society's new address will be 1523 O Street NW, Washington, D.C. 20005. New telephone listings will be area code 202-332-3598 and 332-4466.

April, 1977

**PROTECTION
ASSURED
AGAINST
LIGHTNING**

**1049 Stations Use
The Wilkinson
Line Surge
Protector**

IT REALLY WORKS!

WILKINSON
ELECTRONICS, INC.

P.O. Box 738
Trainer, Pa. 19013
(215)497-5100

For More Details Circle (85) on Reply Card

Wilkinson Electronics Canada Ltd.
15 McCulloch Ave., Rexdale, Ontario
Canada M9W 4M5 (416) 247-9741

**Wilkinson
Self Testing
Silicon Rectifiers
Replace Directly
Mercury Vapor
Tubes**


- * Self Testing — A neon indicator for each diode warns of failure.
- * Direct replacements available for all diode rectifiers — no rewiring necessary.
- * Repairable — any component can be replaced easily.
- * 200% Safety Margin on Voltage — 300% on Current.
- * Fully Guaranteed.

WILKINSON
ELECTRONICS, INC.

P.O. Box 738
Trainer, Pa. 19013
(215)497-5100

For More Details Circle (86) on Reply Card

Sound Dynamics delivers

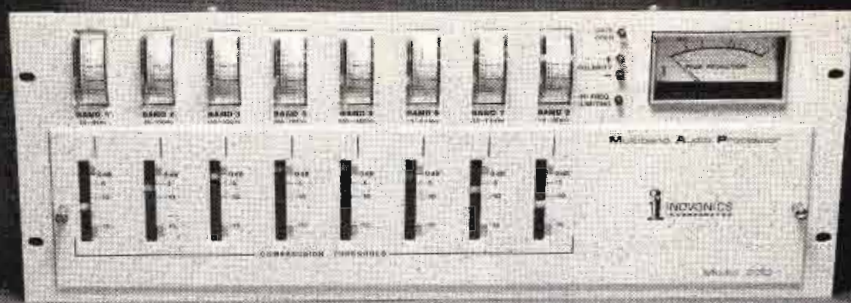


the multiband audio processor as seen at the NAB Convention

Maximize your modulation with Inovonic's Multiband Audio Processor for AM and FM broadcast use. Model 230 features eight independent bands with individual threshold and compression ratio adjustments, gated expansion to prevent "pumping", program-controlled phase inversion and adjustable limiting symmetry provide unequalled transmitter output. All, for as little as \$1500.00. Delivery from stock — limited quantity. Order now!

Sound Dynamics specializes in audio equalizers, cartridge accessories, limiters, magnetic tape heads, microphones, mixing consoles, recorders, recorder electronics, reproducers, speakers, tape degaussers, test tapes, tonearms and turntables. In addition, we offer complete Ampex rebuilding services and custom console cabinets.

**For All Your Audio Needs
Contact:**



sound dynamics, inc.

P.O. Box 32055, San Jose, CA 95152 (408) 926-3588

For More Details Circle (43) on Reply Card

Zoom In!

This is the official column of the American Society of TV Cameramen (ASTVC). The ASTVC can be contacted by writing to: P.O. Box 296, Sparkill, NY 10976. (914) 359-5985.

Take 1!...Paraphrasing

Dagmar: "There's something I've got to get off my chest!"

Unidentified sources tell us that the Academy of TV Arts & Sciences is in trouble...Maybe one of the reasons (if we might venture a guess) is that one of the prime reasons for their original formation way back, has been forgotten... Then again, it may be that they have not completely forgotten their *raison d'être*, but instead have found that trends within the industry have forced certain facts-of-TV-life upon them...

What we are saying is simply this: The **majority** of productions considered, and the **majority** of awards given, are **not** really from the TV area! When we say this, we automatically exclude those programs coming under the news & special events headings. However, the serials, police stories, situation comedies, etc....etc....are **not** produced by the nets, affiliates, or TV production houses...They do **not** employ electronic gear or personnel...In essence, they are the "**new**" form of Hollywood production made for the home screen rather than the theater...At the risk of retelling you what, I am sure, you already know it bears repeating that Hollywood never intended to lose its audience and market for very long...When the post-War introduction of TV did indeed change the entertainment style of Americans and did indeed cause the film industry some concern, big changes were undergone by all the major film studios...Someone at one of their Think-Tank sessions must have said, "Aha! If we can't zing it to them in the theater, C. B. (Editor's note: **not** Citizens Band) let's zing it to them at home." And that's exactly what happened...Over the years, more and more of the fare seen on TV came from the



The New Yorkers Who Hustle the Wind

Street life in a metropolitan area often inspires genius. And that genius can be funneled two ways—good or bad.

The 11th Street Movement in Manhattan's Lower East Side has funneled their genius on the good side with a unique energy saving project involving windmills and solar panels.

This project is just part of the Emergency Energy Conservation Program operated by the Community Services Administration. CSA has established many demonstration programs designed to find new and better ways to help the poor and elderly cope with what for them is a continuing energy crisis.

The program has a broad base, covering everything from development of low cost solar heating and wind generators to experiments with energy conserving farming technologies.

But helping people help themselves isn't an easy task. Simply put, it demands community support—Your support and the support of local and state governments.

If you think this effort is worthwhile, take action, contact your local Community Action Agency or Community Services Administration, Washington, D.C. 20506.

There are thousands of people who want to help themselves. Like the 11th Street Movement—they learned how to catch the wind, so they'll no longer be a victim of the elements.



Just A Friendly Reminder

ANTENNA MONITORS

In case it happened to slip your mind and you are one of the few remaining directional stations yet to comply with paragraph 73.69 of the FCC Rules... you have until June 1, 1977 to have in operation a "Type Approved" antenna monitor.

WE CAN HELP YOU

We have supplied over 90% of all "Type Approved" antenna monitors (both meter and digital readout) now in service.

We invite your questions concerning installation, operation, remote control, sampling systems, etc.

YOU CAN HELP US

When the last deadline rolled around our order backlog resulted in an eight month delivery cycle. If you order now, you can avoid the last minute rush; we can deliver as required; and you will not risk missing the June deadline.

ASK THE EXPERTS!

POTOMAC INSTRUMENTS

932 Philadelphia Ave. • Silver Spring, MD. 20910 • (301) 589-2662

For More Details Circle (45) on Reply Card

Take 2!...While we're at it...

How many times have you professional engineering types out there heard someone watching some event on the tube remark: "I'd enjoy it a lot more if the damned cameraman didn't zoom in and out so much!" or "Why all the fancy footwork with the cameras...can't they hold a scene until I see what's happening?" or "All those effects are giving me a headache!"

When you next hear remarks similar to those above, could you please point out to this uninitiated friend of yours that within the ranks of control room personnel there happens to be someone called a **director**...This person is all-knowing, talented and gifted with the rare ability to sense what will send those hundreds of thousands of viewers "out there" into sheer ecstasy! Usually a pleasant, easy-going person...comes the witching hour (Air Time!) and our director now becomes a Svengali...mesmerizing the entire operating crew so that they become simply an extension of his creative self thereby lending their individual technical

Continued on page 57

filmmakers. Less and less came from NBC, CBS or ABC.

At first it was pretty good; you could always count on seeing some good movie that you might have missed. Movies (on TV) were getting better; so was the financial report in Hollywood.

But while the late late shows were featuring some awfully good movies made originally for the theater, the early evening programs were increasingly becoming mass-production film fare designed and produced for TV consumption. Well, now...what was the Academy to do?...Emmy awards can't just collect dust on the Academy's shelves...they have to be awarded...to someone...for something...The end result was that the Academy found itself in the unenviable position of vying with the Granddaddy of award givers...the Academy of Motion Picture Arts & Sciences. In effect, awards were going to performers, directors, technicians...and even the studios of an **alien** (though related) industry...Was this really representative of the TV industry...and its Arts & Sciences???

The AUTOMATIC Audio Test System That Measures...



MODEL AT-51
AUDIO TEST SYSTEM

- Harmonic Distortion
- Intermodulation Distortion
- Volts
- dB
- Signal + Noise / Noise Ratio
- Wow and Flutter
- Stereo Phasing
- Differential Gain in Stereo Channels

Contact Us Now For Complete Details And Descriptive Literature.

POTOMAC INSTRUMENTS

932 PHILADELPHIA AVE.
SILVER SPRING, MD. 20910
(301) 589-2662

For More Details Circle (46) on Reply Card

Here's everything you need to pull an FM Proof!

The first COMPLETE FM Proof Manual ever offered


Here's everything you need to comply with the FCC's annual proof-of-performance test. Every procedure, every detail is spelled out *step-by-step* in simple, concise language—all reviewed by the FCC. You save time, money, headaches—and you're sure of doing it right the first time.

Broadcast Engineering's FM Proof-of-Performance Manual includes *all* required logging forms for pulling *both* mono and stereo proofs. A complete chapter on FCC Rules. Dozens of helpful troubleshooting tips and time-saving measurement and logging techniques. Detailed procedures on how to *pre-test* your station before pulling the Proof. And more.

Your FM Proof Manual shows you

- how to prepare the test equipment
 - how to connect the test equipment
 - an efficient method of measurement and a look at the performance requirements
 - how to use the data summary sheet and evolve the graphs
 - how to comply fully with FCC rules and standards
- PLUS...you get individual *replaceable* forms for completing the equipment performance tests.


All this in one package. And all for \$6.95

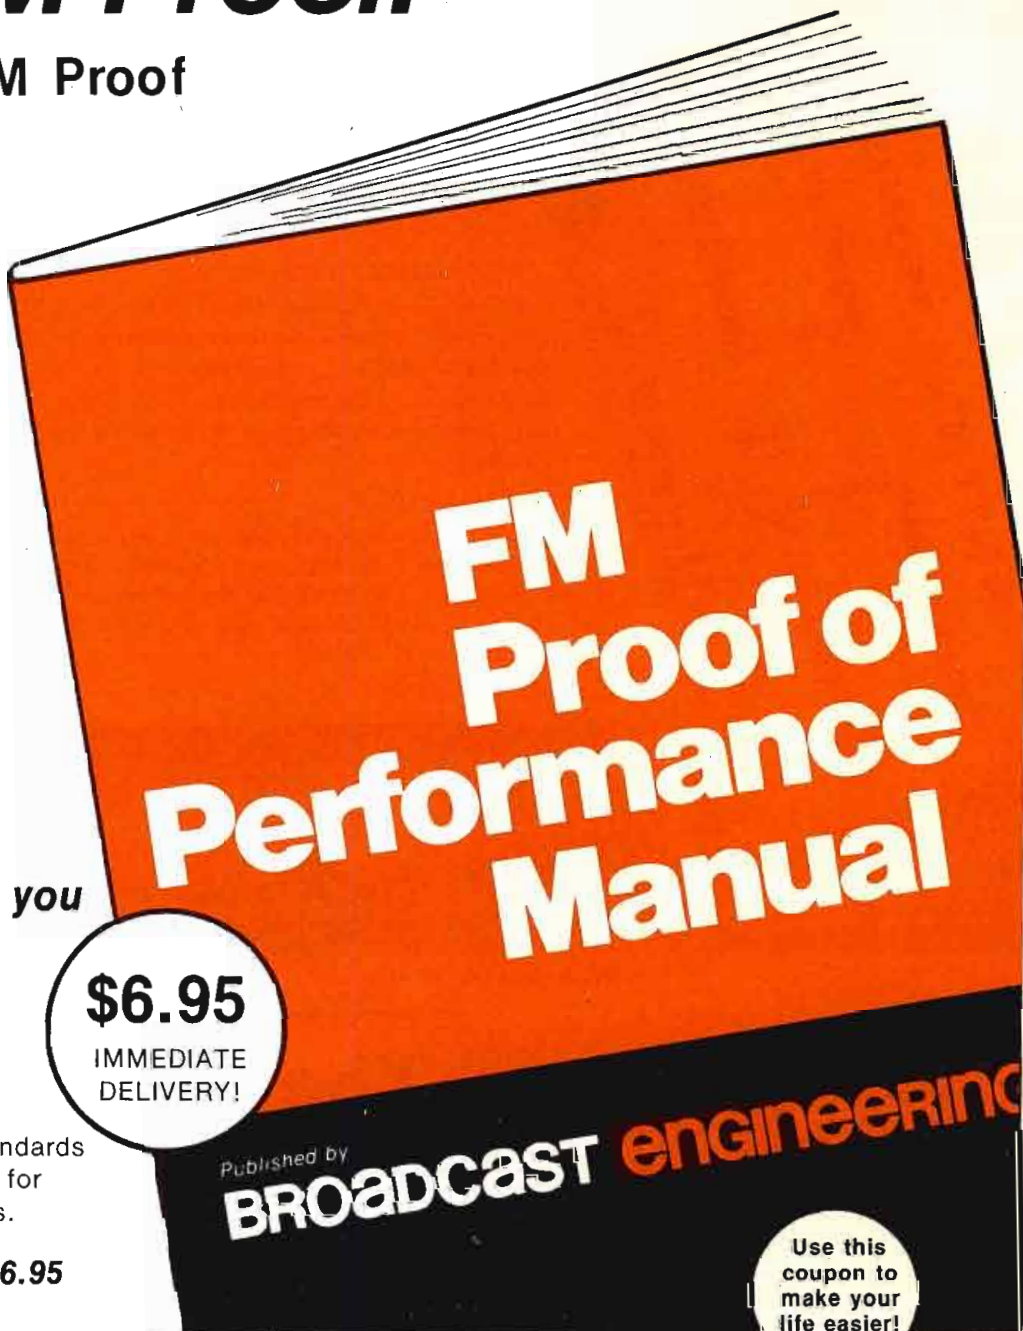

Use this coupon to make your life easier!

SPECIAL OFFER!

Order Both Manuals AND SAVE!

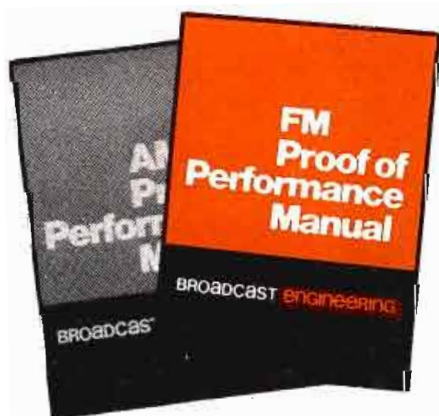

ONLY \$12 for both!
Over 2,500 AM manuals
now in use
and 1,500 FM manuals

Volume discounts available on request.

BROADCAST engineering®

P.O. Box 12901, Overland Park, Ks. 66212

- ☐ Please send me _____ copies of the FM Proof-of-Performance Manual @ \$6.95 each
- ☐ Please send me _____ copies of the AM Proof-of-Performance Manual @ \$6.95 each
- ☐ Please send me _____ sets of the FM and AM Proof-of-Performance Manuals @ \$12 for BOTH.

☐ My check or money order is enclosed

☐ Please bill me

Name _____

Address _____

City _____

State _____ ZIP _____

NOTE: Broadcast Engineering pays the postage on all orders!

DM 3/77

Zoom In!

Continued from page 55

skills to his supreme effort of blending optics with electronics and producing (for the viewer) that headache your friend originally complained about...

Take 3!...Wait until next time... & Get it in!


Come our next column, we hope to be able to get it all in...all those fantastic photos taken at the NAB ...with Ron Merrell and all the boys ...Maybe there'll be some shots of the new gear manned by ASTVC personnel??? Better look for the next issue...and if you are not now getting your **BE** mailed to you, ask us for the **BE** subscription coupon. All ASTVC members should have been sent one in the mail.

Our newsletter editor, Lois Filippi, tells us that she would like all you guys out there to write to her...we don't know just why, but we suspect that she would like to get to know you for professional reasons. (???) How about it guys... tell her about yourselves and send some photos of you and your camera or editor or switcher...

Till next time...

Fade To Black...

This Publication....

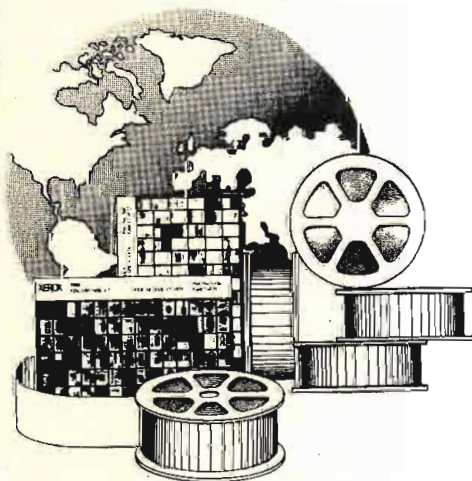

is Available in MICROFORM

For Complete Information


WRITE :

**University
Microfilms
International**

Dept. F.A.
300 North Zeeb Road
Ann Arbor, MI 48106
U.S.A.

Dept. F.A.
18 Bedford Row
London, WC1R 4EJ
England

The QUIET Downstream Chroma Keyer

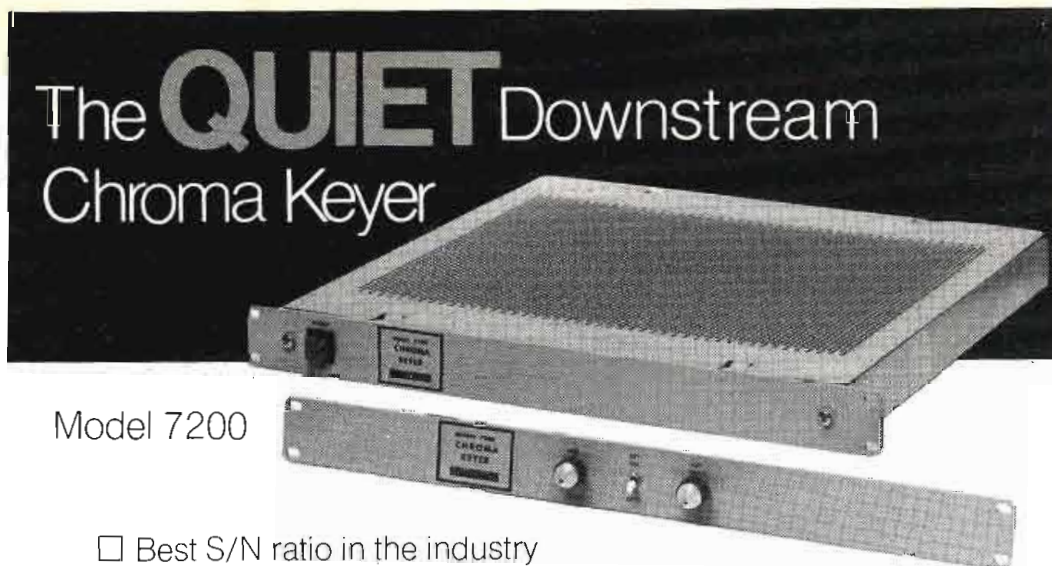

Model 7200

- ☐ Best S/N ratio in the industry
- ☐ Operates from remote feeds—no dedicated camera needed
- ☐ Chroma-keyed output from two encoded video inputs—no switcher required
- ☐ Keys on any color in the NTSC spectrum
- ☐ Zero chroma delay
- ☐ Comb filter for minimum noise and "chroma crawl"
- ☐ Sync adding capability for non-composite inputs

Write or call today for complete specifications.

DYNASCIENCES

video products

A SUBSIDIARY OF **Whittaker**

Township Line Road, Blue Bell, PA. 19422
Tel.: (215) 643-0250/Telex: 84-6358

For More Details Circle (47) on Reply Card

IMERO FIORENTINO ASSOCIATES

announces its sixth

Television Lighting & Staging Seminar / Workshop



Authoritative instruction covering the spectrum of current techniques, given by television's most experienced production personnel including Imero Fiorentino, Bill Klages, E. Carlton Winckler, David Clark and George Riesenberger.

DATE June 13 thru 15, 1977

LOCATION The New Jersey Public Television Studios
(near Princeton, N.J.)

COST \$385. includes get-together cocktail/dinner and lunches.

FOR MORE INFORMATION Please call (212) 787-3050, or write Education Division, Imero Fiorentino Associates, Inc., 10 West 66th Street, New York, N.Y. 10023

For More Details Circle (48) on Reply Card

TRANSMITTING TUBES
EIMAC RCA EEV
AMPEX VARIAN

Guaranteed Lowest Prices

Factory-Fresh New Tubes.

Guaranteed Fastest Deliveries

All Tubes in Stock.
Immediate Deliveries.

Ask for complete details
on our Exclusive Price
Insurance Policy.

CALL TOLL-FREE
(800) 221-6844
For lowest prices, fastest
deliveries.

**CALVERT
ELECTRONICS, INC.**
220 East 23rd Street
New York, N.Y. 10010

For More Details Circle (49) on Reply Card



Accurate Sound Corporation
can now offer the new 2600
transport with MCI JH5 elec-
tronics. 1 year parts warranty
with 90-days labor.

Without Cabinet
\$2675.00 mono
\$3265.00 2-channel
\$4645.00 4-channel

Walnut Formica Console
\$2995.00 mono
\$3595.00 2-channel
\$4995.00 4-channel

Write for complete specifications
and our new Spring '77 Catalog.



ACCURATE SOUND CORPORATION
114 5th Ave.
Redwood City, CA 94063
415-365-2843

For More Details Circle (50) on Reply Card

NEW PRODUCTS

Miniature Broadband Step Attenuator

Narda Microwave has developed
a new custom engineered broad-
band miniature OEM step attenua-
tor which operates over the entire
DC to 18 GHz frequency range in 1
dB steps to 69 dB. This miniature
step attenuator features field re-
placeable attenuator capsules that
will eliminate long downtime.

It is designed for use in high
reliability 50Ω systems and appli-
cations where space and weight are
at a premium. This attenuator uses
the unique Narda detent which
assures resetability to better than
0.05 dB to 18 GHz. It has been
designed to be mounted through
the front panel and can employ any
standard connector configuration.
This miniature step attenuator is
only one sample of the custom
engineered attenuators designed by
Narda to meet specific customer
requirements.

For More Details Circle (70) on Reply Card

Audio Switching Module


Modular Audio Products New
Model 4011 FET Audio Switching
Module provides four fully inde-
pendent, remote-controllable audio
switch circuits on a compact,
plug-in PC card, with gold plated
edge contacts.

Ideal for use in high quality
professional audio applications,
Model 4011 may be utilized indi-
vidually, to perform various switch-
ing functions in console mixing
channels; or in multiples, to form
large or small Matrix type switch-
ing/routing systems.

Designed for optimum perfor-
mance in 600 ohm balanced or un-
balanced circuits, Model 4011 fea-
tures: High Speed -2 microseconds
from On to full Off state (-100 dB
at 1 kHz, + 4 dBm input Nom.).
Low Distortion - 0.07 percent at +
4 dBm output, 1 kHz; and High
Input Level capability - +22 dBv
Max. Frequency response of the
unit is extremely flat from DC to 20
kHz (-0.1 dB Max). Power require-
ments: ±15VDC at 10 mA Max.

QUALITY TALKS FOR WKY

Oklahoma City, Okla.

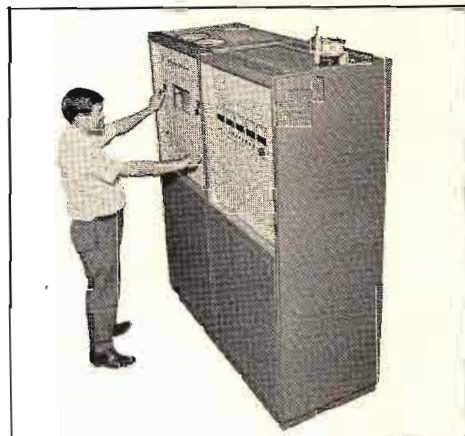


Continental's new 5/10 kW AM
transmitter is setting records for
acceptance. It has performance
and efficiency, with the cleanest
sound around. Listen to Continen-
tal: quality talks.

Write for brochure: Continental Electronics
Mfg. Co. Box 270879 Dallas, Texas 75227
(214) 381-7161

**Continental
Electronics**

For More Details Circle (51) on Reply Card

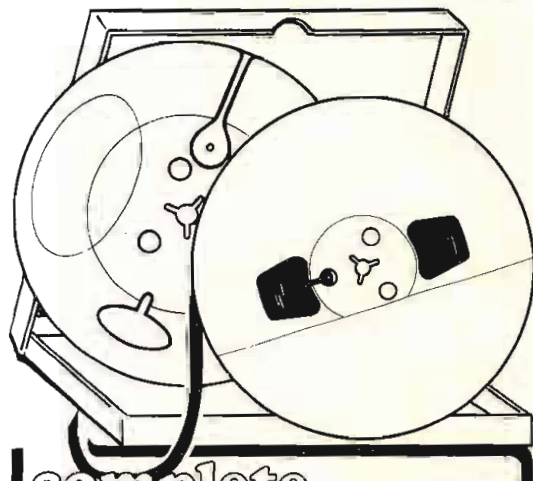

complete supplies for reel to reel audio recording

TAPE AMPEX and Scotch
all professional grades
on reels or on hubs
**EMPTY
REELS** all sizes, widths
and hub types
BOXES for all reels, in various colors
LEADER, TIMING & SPLICING TAPES

Top Quality Competitive Pricing
Immediate Shipment
Call or Write for Details/Prices
Recording Supply Co.
DIVISION OF POLYLINE CORP.
1233 RAND RD. • DES PLAINES, IL 60016
312/297-0955

For More Details Circle (52) on Reply Card
BROADCAST ENGINEERING

per card. Dimensions: 2-3/4 inches high x 4 1/2 inches long x 13/16 inches wide.

This latest addition to the well known MAP IMPAC Series of "Integrated Modular Professional Audio Components," is a part of a total modular system concept, employing various plug-in modules, standard 19 inches W. x 3 1/2 inches H. Rack Mounting Card Frames and Modular power supplies. MAP IMPAC offers a high degree of flexibility in the design of Modular audio systems, now featuring the option of self-contained or remote controlled operation.

For More Details Circle (71) on Reply Card

Broadcast Encoder

Sansui has introduced a professional QS 4-channel broadcast encoder. It uses 2-channel media to store and transmit all information necessary for 4-channel playback.

While it is totally compatible with all existing 4-channel matrix playback equipment, the recent QS decoders with the QS vario-matrix ICs offer interchannel separation of more than 20 dB without introducing any side effects which are common to the gain controlled enhancement devices.

The power requirements are voltage: 115v 60 Hz, and consumption: 20 W rated. Dimensions are 19 inches x 3 1/2 inches x 12 3/4 inches. The net weight is 6.23 kg.

For More Details Circle (72) on Reply Card

DC Drum Servo Kit

A direct drive DC Drum Servo update kit for Sony VO-2850/2850 A videocassette machines has been announced by **Video Associates Laboratories** in time for spring deliveries. The unit replaces the conventional drum drive belt and DC brake assembly with a high torque DC motor. Servo circuit changes include the addition of a unique single adjustment speed discriminator circuit, an additional power supply, and a motor power amplifier.


When installed on the record side of an editing system, the unit will track out incoming variations without any belt slippage. Overall time base error is improved to the point that a $\pm$ one line window time base corrector is adequate. All effects of

Continued on page 60

THE BETTER WAY


DATATEK TV VIDEO SWEEP GENERATORS

DESIGNED FOR TELEVISION

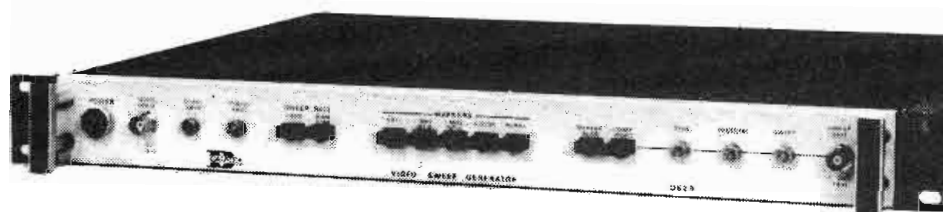

For use as a station test signal — Model D-629

This Datatek Video Sweep Generator provides sync and blanking inputs to generate a composite video sweep signal synchronous with station pulses. It is used to route video sweep throughout the plant to monitor system frequency response. The D-629 includes blanked markers selectable at 1MHz and 5 MHz intervals, and a separate marker for color sub-carrier.

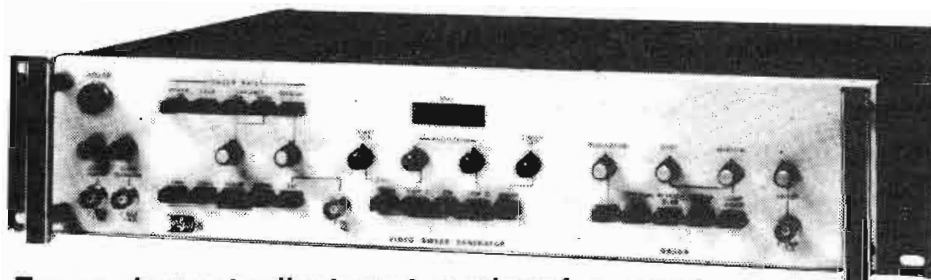

For equipment adjustments and performance measurements — Model D-630A

The Model D-630A Video Sweep Generator is ideally suited for measuring and optimizing station video equipment. It includes comprehensive marker facilities with frequency readout, fixed and variable sweep rates, CW mode and internal as well as external sync and blanking facilities.

For further information call or write:

D

DATATEK
CORP.,

1166 W. CHESTNUT STREET, UNION, N.J. 07083
(201) 964-3656

FREE CATALOG & AUDIO APPLICATIONS



OPAMP LABS, INC.
1033 N. SYCAMORE AVE.
LOS ANGELES, CALIF. 90038
(213) 934-3566

CONSOLES
KITS & WIRED
AMPLIFIERS
MIC., EQ, ACN,
LINE, TAPE, DISC,
POWER
OSCILLATORS
AUDIO
TAPE BIAS
POWER SUPPLIES

For More Details Circle (53) on Reply Card

angénieux service corporation of california
13381 BEACH AVE., VENICE, CALIF. 90291 • (213) 821-5080



FACTORY SERVICE CENTERS
REPAIRS • PARTS
ACCESSORIES

angénieux corporation of america
440 MERRICK RD., OCEANSIDE, N.Y. 11572 • (516) 678-3520

For More Details Circle (54) on Reply Card

BUILD A BETTER STUDIO

Call Aderhold Construction Company. A complete construction management team of architects, builders, engineers and designers. No problem too large or too small. 404/233-5413.



Aderhold Construction Company
3384 Peachtree Rd. NE / Atlanta, Georgia 30326

For More Details Circle (55) on Reply Card

Since you're already aware of RCA quality, it makes sense to find out what's inside this Audio Processing System.

New Products

Continued from page 59

power frequency deviations and transients are eliminated.

Since initial motor installation is critical and Video Associates Laboratories cannot supply exact information for each machine's unique requirements, you may choose to have Video Associates Laboratories install the kit for you. If you prefer to do the work yourself, an installation and maintenance training video tape cassette is available from Video Associates Laboratories.

For More Details Circle (73) on Reply Card

VTR Controller

The new 4220 frame accurate edit code comparator from **BTX Corporation** compares any preset SMPTE time code with any parallel decoded SMPTE data off tape and provides a command signal to start or stop VTRs and audio recorders, and activates an LED signal light when the dialed-in tape location is reached.

The 4220 comparator operates in both play and rapid shuttle modes, and in both forward and reverse

tape motion.

Typical applications include controlling VTRs and audio recorders using SMPTE time code for accurate frame by frame editing, and upgrading existing tone editing systems for SMPTE time code compatibility.

The 4220 is packaged in a rugged metal case the size of a transistor radio and is designed to survive the rigors of everyday continuous use in the tape room or production studio. It is fully compatible with all SMPTE time code editing equipment.

For More Details Circle (74) on Reply Card

Squeezoom®

Vital Industries' Squeezoom® is an electronic system that will lock up to four non-synchronous, foreign, remote, or in-house color video pictures and display them simultaneously on the screen maintaining the full raster picture content of every signal. The Squeezoom will squeeze a full picture to any size and any position on the screen. It will freeze one full resolution frame of color video, and it will zoom any segment of a picture

Behind those dials and light-emitting diodes is the reason for RCA quality: RCA technology. And it's pretty impressive.

The system shown here, for example, is our BA-145AGC amplifier and the BA-146/147 Limiter. All tops in AM, FM and TV Audio Control. Both have our unique Program Modulated Release (PMR) with automatic reset—for the latest approach to fast attack, with inaudible AGC or limiting action. And with RCA, fast limiting without a "thump" is certain—our non-temperature sensitive insulated-gate field-effect transistor (IG/FET) controlling element simply designs the thump out.

Of course, there's plenty more to see in an RCA audio processing system. And you're backed by RCA technical service, and RCA parts distribution, all the way. Send the coupon, today.

RCA Broadcast Systems
Radio Station Equipment Product Management, Building 2-5, Camden, N.J. 08102

Dear RCA: Okay. Tell me more about what's inside your audio processing systems. Send literature immediately. ☐ Have your representative call.

Name _____

Title _____ Station _____

Address _____

City _____ State _____ Zip _____

I'm interested in:

☐ BA-145 AGC Amplifier for AM, FM, or TV ☐ BA-146 Limiter for AM
☐ BA-147 Limiting Amplifier for FM or TV (use 2 for stereo)

RCA Broadcast Systems



For More Details Circle (60) on Reply Card

to a full screen. It will also have multiple horizontal and vertical patterns of compressions giving the video industry new vistas of picture control only possible before with lengthy film optical techniques.

For More Details Circle (75) on Reply Card

Production Switcher

A studio production switcher with built-in microprocessor to provide event memory and simplified operation was introduced by **3M Company's Mincom Division** at the National Association of Broadcasters convention.

The 3M Model 516 video production switcher with microprocessor control is a departure from traditional switcher design and features the ability to "remember" up to four programmed events for recall during production. Further, because of its microprocessor, switcher operation and reliability are improved.

More than 20 effects are selected by a 10-key input bank; additional patterns may be incorporated in the future.

For More Details Circle (76) on Reply Card

DYMA MEANS RESONATOR III

the only audio effects system including reverb
designed for broadcast

we build the big ones.

DYMA

ENGINEERING, BOX 1697, TAOS, NEW MEXICO 87571

from secret mountain laboratories,

(505) 758-2686

For More Details Circle (56) on Reply Card

Mark IV-T Weatherminder


The original weather console designed especially for radio station local programming. Although many have tried to copy it for the last 20 years we can and will, on request, send you a list of hundreds of radio stations that still use and prefer the Mark IV. Real professional equipment at a modest price.

Texas Electronics, Inc.

P. O. Box 7225B

Dallas, TX 75209 ■ (214) 631-2490

For More Details Circle (57) on Reply Card



**Wind Direction & Speed
Barometric Pressure
Remote Temperature**

Also, a complete line of weather instruments, recorders, sensors, controllers, etc. Ask for Sheet BW-72.



Since you're already aware of RCA quality, it makes sense to find out what's inside this AM Superphase transmitter.

"Superphase," our unique extra modulation capability, provides full 125% positive peak modulation economically without overload. The result is today's loud sound, with low distortion, and frequency response from 30 to 15,000 Hz. It's the closest thing yet to FM sound in AM radio.

Our Superphase 5 KW and 10 KW transmitters are all solid state below the IPA stage, and use only two tube types. No costly modulation transformer, no chancy carrier-peak amplifiers. Two Superphases make an ideal alternate-main or parallel system.

Your RCA transmitter will be backed by technical assistance at every stage of specifying, installation and changeover. And by 24-hour RCA parts service. For the facts, send the coupon.

RCA

RCA Broadcast Systems
Radio Station Equipment Product Management
Building 2-5, Camden, New Jersey 08102

Dear RCA:
Yes, I'd like to learn all about what's inside your AM Superphase transmitters. Please send literature immediately.

☐ Have representative call.

Name _____

Title _____ Station _____

Address _____

City _____

State _____ Zip _____

I'm interested in:

☐ 5 kw AM transmitter, Type BTA-5L2
☐ 10 kw AM transmitter, Type BTA-10L2

RCA Broadcast Systems

For More Details Circle (61) on Reply Card

advertisers' index

Accurate Sound Corporation	58
Aderhold Construction Company	60
Ampex Corp.—AVSD	7
Ampro	23
Angenieux Corp. of America	60
Audio Designs & Mfg.	11
Beaucart Division, UMC Electronics Co.	50
Belar Electronics	25
Broadcast Electronics	10
CCA Electronics Corp.	45
Calvert Electronics Inc.	58
Canon Video	17
Capitol Magnetic Products	31
Central Dynamics Corp.	19
Cetec Broadcast Group	5
Continental Electronics Mfg. Co.	58
Datek Corp.	59
Dyma Engineering	61
Dynair Electronics, Inc.	9
Dynasciences Video Products	57
English Electric Valve North America	46
Fidelipac	46
Imero Fiorentino	57
The Grass Valley Group, Inc.	3
Clifford B. Hannay & Son, Inc.	50
Harris Corp., Broadcast Products Div.	37,39,41
Holland Electronics	42
Ikegami Electronics (USA) Inc.	29
International Tapetronics Corp.	48
McCurdy Radio Industries	Cover 2
Marti Electronics	28
Micro Consultants Inc. (MCI)	33
Microtime	43
Minneapolis Magnetics, Inc.	38
Opamp Labs, Inc.	60
Potomac Instruments Inc.	55
RCA Communications Systems Division	60,61
Recording Supply Corp.	58
Recortec Inc.	47
Jos. Schneider & Co.	52
Shure Brothers, Inc.	Cover 4
Sony Corp. of America	12,13
Sound Dynamics, Inc.	54
Spotmaster	10
Tektronix, Inc.	21
Telemation, Inc.	49
Telex Communications Inc.	36
Texas Electronics, Inc.	61
UMC Electronics Company, Beaucart Division	50
Video Aids Corp. of Colorado	51
Videomagnetics	Cover 3
Wilkinson Electronics Inc.	53

PROFESSIONAL SERVICES

MIDWEST ENGINEERING ASSOCIATES

Consulting Engineers

6934 A N. UNIVERSITY
PEORIA, ILLINOIS 61614
(309) 692-4233
Member AFCCE

SMITH and POWSTENKO

Broadcasting and Telecommunications
Consultants

2000 N. Street, N.W.
Washington, D. C. 20036
(202) 293-7742

McCLANATHAN & ASSOCIATES

Consulting Engineers
APPLICATIONS & FIELD ENGINEERING
TURNKEY INSTALLATIONS—RADIO & TV
DIRECTIONAL ANTENNA DESIGN

P.O. Box 750
PORTLAND, OREGON 97207
Phone: 503/246-8080
TWX 910-464-6112/Frontier

MERL E. RINEHART, P.E.

CONSULTING RADIO ENGINEER
Applications and Field Engineering
P.O. BOX 162, WOODLAND PARKWAY
STATE LINE, PENNSYLVANIA 17263
(717) 597-9160

Applied Video Electronics, Inc.

STUDIO SYSTEMS DESIGN AND INSTALLATION ENGINEERING. REFURBISHING/MODIFYING COLOR CAMERAS AND QUADRUPLEX VIDEO TAPE RECORDERS.

Post Office Box 25
Brunswick, Ohio 44212
Phone (216) 225-4443

RALPH E. EVANS ASSOCIATES CONSULTING COMMUNICATIONS ENGINEERS

216 N. Green Bay Road
Suite 208
Thiensville, WI 53082
Phone: (414) 242-6000 Member AFCCE

W. H. BRADLEY, P.E. B. L. BRADLEY, BS/EE

Consulting Radio Engineer
Engineering Applications
& Field Engineering
Phone: 918-245-5444
300 West 41 Street,
SAND SPRINGS, OKLAHOMA, 74063

VIR JAMES

CONSULTING RADIO ENGINEERS
Applications and Field Engineering
Computerized Frequency Surveys
345 Colorado Blvd.
Phone: (Area Code 303) 333-5562
DENVER, COLORADO 80206
Member AFCCE

Joseph & Donna Roizen VIDEO CONSULTANTS

International TV Systems
Marketing/Technical Writing
800 Welch Rd., Suite 354
Palo Alto, Ca. 94304
Tel: (415)326-6103

CLASSIFIED

TRAINING

FIRST PHONE in six to twelve weeks through tape recorded lessons at home plus one week personal instruction in Boston, Philadelphia, Detroit, Atlanta, St. Louis, Seattle or Los Angeles. Our twentieth year teaching FCC license courses. Bob Johnson Radio License Preparation, 1201 Ninth, Manhattan Beach, Calif. 90266, Telephone 213-379-4461. 8-75-tf

BROADCAST ENDORSEMENT and third phone preparation on cassettes. Illustration book includes current FCC-type exams. Radio License Preparation, 1201 Ninth, Manhattan Beach, Calif. 90266. 8-75-tf

GET YOUR FIRST TO GET THERE FIRST! DON MARTIN SCHOOL OF COMMUNICATIONS! Since 1937, training Broadcasters for Broadcasting! 1st Phone training using latest methods and completely equipped Transmitter studio. Call or write for details and start dates. Don Martin School, 7080 Hollywood Blvd., 5th floor, Hollywood, CA 90028. Call (213) 462-3281 or (213) 657-5886. 8-75-tf

PASS FCC first and second class exams with new 21-lesson, 450-page course. Starts with basic electricity. Over 600 FCC-type, multiple-choice questions and sample exams included. No previous technical knowledge required. Commercial Radio Operator Theory Course, #15-01. Only \$5.95. Ameco Publishing, 275G Hillside Ave., Williston Park, N.Y. 11596. 8-72-tf

PASS FCC EXAMS with Ameco books. Each book contains FCC questions plus simplified answers plus FCC-type exams and answers. 3rd class includes broadcast endorsement \$1.25. 2nd class \$2.50, 1st class \$1.60. Free catalog. Ameco Publishing, 275G Hillside Ave., Williston Park, N.Y. 11596. 8-72-tf

TRAINING (CONT.)

EARN YOUR ELECTRONICS DEGREE by correspondence, G. I. Bill approved. For free brochure, write Grantham School of Engineering, Information Desk, 2000 Stoner Avenue, Los Angeles, Calif. 90025. 8-72-tf

SERVICES

FREQUENCY MEASURING SERVICE—WE'RE #2 —MONITOR REPAIRS—MOBILE UNIT—covers Northern 2/3 Ill., Eastern Iowa, Eastern Minn., Southern 2/3 Wis., Western Mich., and Western Ind., monthly. Radio Aids, 528 Ravine Ave., Lake Bluff, Illinois 60044, (312) 234-0953. 2-74-tf

COMMERCIAL RADIO MONITORING CO. Precision frequency measurements since 1932. Local and mobile service covering entire midwest plus. Test instruments, counters, monitors repaired and certified. Lee's Summit, Mo. 64063. (816) 524-3777. 9-74-tf

ONE STOP FOR ALL YOUR PROFESSIONAL AUDIO REQUIREMENTS. Bottom line oriented. F.T.C. Brewer Company, P.O. Box 8057, Pensacola, Florida 32505. 7-71-tf

HELIX-STYROFLEX. Large stock—bargain prices—tested and certified. Write for price and stock lists. Sierra Western Electric, Box 23872, Oakland, Calif. 94623. Telephone (415) 832-3527. 1-73-tf

CAMERA TUBES...ALL TYPES EXCEPT ORTHICONS CAN NOW BE RECONDITIONED AT AN UNBELIEVABLE PRICE, LEAD OXIDE TYPES \$300.00, VIDICONS FROM \$35 TO \$200.00. ALL RECONDITIONED TUBES COME WITH 500 HOUR WARRANTY. FOR DETAILS WRITE: RODONCO ENGINEERING, CAMERA TUBE DIV., 4020 STAPLETON DR., BLOOMINGTON, IND. 47401. 8-75-tf

USED BROADCAST EQUIPMENT sold on consignment. Catalog updated and mailed free bi-monthly. David Castellano, 3232 McNutt Ave., Walnut Creek, Calif. 94596. 11-76-6t

TRANSMITTER TUBES—Save 40 to 50%. 3CX2500, 4CX5000, 4CX10000, 4CX15000, 4CX35000 and many others. Write for details: FREELAND PRODUCTS CO., 3233 Conti St., New Orleans, La. 70119. 504-822-9223. 11-76-12t

WANTED

WANTED: All surplus broadcast equipment especially clean A.M. & F.M. transmitters, capacitors, 112 Clark & Potomac Phase monitors, Field Strength Meters, etc. High prices. All custom duties paid. Surplus Equipment Sales at 2 Thorncliffe Pk. Dr., Unit 28, Toronto 17, Ont., Canada (416) 421-5631. 1-76-tf

WANTED: Pre-1926 radio equipment and tubes. August J. Link, Surcom Associates, 305 Wisconsin Ave., Oceanside, Ca. 92054, (714) 722-6162. 3-76-tf

77D or BK5, 7548 30th NE, Seattle, Wash. 98115. 2-77-4t

WANTED: 21E/M Collins transmitter. Call collect 2636/7 or Telex 339 Caradio LC to Foster Radio Caribbean, P.O. Box 121, St. Lucia, West Indies. 4-77-2t

WANTED: Thermostat TH-503, 60 Degrees C for General Radio 1181-A Frequency Monitor. Call 615-523-3171 or write WNOX Radio, Knoxville, Tenn. 37917. 4-77-1t

WANTED: MANUAL FOR MOTOROLA DS-9660-B Conelrad monitor, Doug Smith, 1369 Tree Garden Pl., Concord, CA, 94518. 4-77-1t

WANTED for campus AM radio station production studio training program: one 8 fader audio console; 2 turntables, tone arms and cartridges; one recording cartridge tape machine; one reel-to-reel tape recorder. All monaural. Small college. Tax write-off donation. Brad Gromelski, Chairman of Radio/TV, Elizabeth Seton College, 1061 North Broadway, Yonkers, N.Y. 914-969-4000. 4-77-1t

TELOP WANTED. Cheap! Ed Howell, Folly Beach, S.C. 29439. 4-77-1t

WILL PURCHASE FOR CASH any of your excess tubes—transmitting, camera types; anything in good condition, including lamps and electronic parts. Write to: S & M Associates, 1231 Water-view Street, Far Rockaway, N.Y. 11691. 4-77-eot-6t

WANTED (CONT.)

WANTED: Urgently AMPEX VTR 1200B without Proc. Amplifier or Colortec Unmounted ok. Call or write ALVORADA EXPORT, 12310 NW Seventh Avenue, Miami, Florida 33168, (305) 681-6733. 4-77-11

EQUIPMENT FOR SALE

BROADCAST CRYSTALS for AM, FM or TV transmitters. frequency change, repair or replacement of oven types. Also new vacuum types for RCA, Gates, Collins, etc. transmitters. Quality products, reasonable prices and better delivery! Don't be without a spare crystal. Frequency change and service for AM and FM frequency monitors. Over 30 years in the business. Eidson Electronic Co., Box 96, Temple, Texas, 76501. Phone (817) 773-3901. 12-74-tf

MOTORS FOR SPOTMASTERS

NEW Paps hysteresis synchronous motor HSZ 20.50-4-470D as used in series 400 and 500 machines. Price \$49.00 each prepaid, while they last. 90 day warranty. Terms check with order only, no COD's. Not recommended for Tapecaster series 600 or 700.

TAPECASTER TCM, INC., Box 662
Rockville, Maryland 20851

1-72-tf

MICA AND VACUUM transmitting capacitors. Vacuum relays. Large stock; immediate delivery. Price lists on request. SURCOM ASSOCIATES, 305 Wisconsin Ave., Oceanside, Ca 92054, (714) 722-6162. 3-76-tf

A FEW COMPETITIVELY PRICED used Revox A77 & A700 decks available. Completely reconditioned by Revox, virtually indistinguishable from new and have the standard Revox 90 day warranty for rebuilt machines. Satisfaction guaranteed. Write requirements to ESSi, Box 854, Hicksville, N.Y. 11802 (516) 921-2620. 5-76-tf

DISCOUNT BROADCAST AND STUDIO EQUIPMENT. New and Rebuilt. Cart and Reel Recorders, Consoles, Limiters, Monitors, Preamps, Mic's, Speakers, Turntables, racks, furniture, reconditioning services, parts. AUTODYNE: Box 1004, Rockville, Maryland 20850. 2-77-tf

TRANSMITTER PRESENTLY IN USE, available March, 1977. GE-TT-32-B, 50 Kw, Filterplexer on Channel 12, notch diplexer, heat exchanger, spare parts, and power tubes—\$25,000. Bill Moore, KBMT-TV, 713/883-7512. 3-77-2t

DON'T PAY \$150.00-\$280.00 each for VIDEO or PULSE distribution amps. You can save your organization a few thousand dollars, if you have someone who can solder and follow simple instructions. I supply ALL parts, including pre-drilled and etched epoxy card, for building a six output, BROADCAST video or pulse amp. AVAILABLE ONLY PER THIS AD. Will ship prepaid, COD or P.O. from credible CO. TELE-TEC, 8688 ROYAL DRIVE, NOBLESVILLE, INDIANA 46060. VIDEO 3601-VDA PULSE 3601-PDA, complete with instructions, \$25.00 each. 3-77-3t

IVC 870 VIDEO TAPE RECORDER—Purchased new from IVC, used less than 10 hrs. Local TV station added VTR to play our 3/4" cassette masters. Must sell. Highest offer above \$6,000. Patten Bible College, 2433 Coolidge, Oakland, CA 94601. (415) 533-8300, Dan Coryell. 3-77-2t

HARRIS GATES—LD Logging Decoder, LE Logging Encoder, LEC Logging Encoder Control, Premier 5 digit Logging Printer. In recent service—relatively good condition. \$1000—complete. Valley Communications Inc., Box 159, Skowhegan, Me. 04976. 207-474-5171. 3-77-2t

IVE-500 COLOR CAMERA with external controls, camera control unit, camera junction unit, intercom and encoder with approximately 50 feet of camera cable. Camera head has been dropped and has structural damage. Balance of equipment in excellent condition. For details, contact Bert Walling, Chief Engineer, KTRC Television, Lufkin, Texas, P.O. Box 729, phone number (713) 634-7771. 4-77-2t

LATE MODEL GRASS VALLEY SWITCHER. Dual Mix-Effects Amps w/Pgm-PVw mixer w/auto fade. Dual Chroma Key. Downstream Keyer with Border/Shadow/Outline and colorizers. Quad Split. Twenty inputs with four aux. busses timed for full reentry. Model 1400-9 loaded with extras. For details call (213) 655-8134 or write Pacific Video Industries, 8721 Sunset Blvd., Los Angeles, Ca. 90069. 4-77-2t

RAZOR BLADES—Single Edge, Tape Editing, Raltec, 25884B Highland, Cleveland, Ohio 44143. 4-77-12t

EQUIPMENT FOR SALE (CONT.)

IVC-960CD, 1" TAPE MACHINE—Totally refurbished—\$15,000. Bill Moore, KBMT-TV, 713/883-7512. 3-77-2t

BRIDGES COMPLETE with books and cables. Excellent condition. Best offer. 01B-1 Delta Electronics Operating Impedance Bridge. Also, General Radio type 916A Radio Frequency Bridge. Reply Broadcast Engineering, Dept. 376, Box 12901, Overland Park, Ks. 66212. 4-77-11

DOLBY LABS MODEL 334 unit (five months old), RCA BTS-1B stereo generator (20 months old), 2 Marti CLA-40 Compressor/limiters. All in excellent condition. WEOS-FM, Geneva, N.Y. 14456. 315-781-0155. 4-77-11

EIDOPHOR PROJECTOR PARTS. Cassettes, lenses, optics electron guns. Call 213-656-5713 for info. 4-77-3t

GENERAL ELECTRIC 250, 350, and 240 parts available. 213-656-5713 for info. 4-77-3t

TV EQUIPMENT FOR SALE—TV tower and line for sale: stainless G-4, 400 foot tower now supporting 7,000 pound RCA antenna. Guy cables and saddles included. Fully galvanized and painted and less than seven (7) years old. Also, 25 sections of RCA 6-inch transmission line, bullets and hangers, \$22,500. Contact M. D. Smith, IV, Manager, WAAY-TV, 1000 Monte Sano Boulevard, Huntsville, Alabama 35801 or phone (205) 539-1783. 4-77-11

SCULLY 280 ADD-ONS...Accepts a pair of Dolby 361s or any 19" x 3 1/2" electronic panel. Only \$49.95 FOB Bridgeport. Send check with order. Rus Lang Corporation, 247 Ash St., Bridgeport, CT 06605. Telephone: 203-384-1266. 4-77-11

RCA TP6 DL/DC 16MM TELEVISION PROJECTORS. One has magnetic playback kit installed. Call Ken deGruchy, 201-652-8632. Write, 281 Eastbrook Road, Ridgewood, NJ 07450. 4-77-2t

TWO AMPEX 1200B VTR with Colortec, Velcomp, One-2 Speed E.E., One 3M DOC, Three Spare Videoheads—Asking \$99K or Best Offer. Four RCA TR-3 Low Band Color. Best offer. Call (516) 538-8700. 4-77-11

B.E. MAGAZINE BACK ISSUES. Have nearly all, 65-74 inclusive. Many back issues BME, 70-74 inclusive. \$2.25 each, postpaid. F. Rider, Box 2067, Miami Beach, Fla. 33140. 4-77-11

MICROPHONES—Shure SM5-B, SM-7, SM-11. Overstock and demo use only. Contact Track Audio, P.O. Box 24722, Seattle, Wa. 98124, (206) 941-2233. 4-77-11

900 FOOT TELEVISION TOWER—Blaw Knox with 70 lb. wind loading capacity, elevator and guy cables in good condition. Will be dismantled by current owner and ready for transport from Miami, Fla. in June, 1977. Best offer. S. L. Rogers, VP Engineering, WPBT, P.O. Box 610001, Miami, Fla. 33161, 305-949-8321. 3-77-2t

SPARTA/BAUER Model 710 AM transmitter, 10 KW serial 101, high performance modulator—like new, one year use. Frequency 1500 KHZ, new tubes, \$17,000.00. Contact Edward Alatorre, (213) 965-2441 and (714) 996-5685. 3-77-3t

EQUIPMENT FOR RENT

MINICAM FOR RENT—New RCA TK-76 Camera for rent. \$450/day or \$2250/week. Call (415) 777-5777. 3-77-2t

BUSINESS OPPORTUNITY

SOUND AND VIDEO PLAYER without motors or moving parts—Send \$3.28 to cover expense for diagram and investment opportunities. Gene R. Martin, 600 MacArthur Ave., San Pedro, Ca. 90731. 4-77-11

HELP WANTED

STUDIO MAINTENANCE SUPERVISOR, Asst. Chief Engineer needed. TCR 100, TR 70B, TK 44A, TK 27B, CDL Video Switcher. Must be experienced. Equal Opportunity Employer. For information write: WXEX TV, 230 South Crater Road, Petersburg, Va. 23803. 4-77-2t

TELEVISION MAINTENANCE/Supervisors, Electronic/Computer Systems Technicians/T.V. Servicepersons, for Northern New Jersey or New York Area. Send resume to: V.P.C., P.O. Box 268, New Hyde Park, N.Y. 11040. 1-77-tf

HELP WANTED (CONT.)

PATENTED MATV. \$200.00 day profit possible. Preliminaries \$3.00. Box 809, Boynton Beach, Fla. 33435. 10-76-13t

EXPERIENCED CHIEF ENGINEER for three small market radio stations located in Northwestern Ohio. Position requires FCC 1st. Some air work or sales helpful. Send resume to W. A. Triplett, Lafayette Ave., Box 232, Marlton, N.J. 08053. 4-77-2t

TELEVISION ENGINEER needed to assume duties of retiring chief engineer. Must know maintenance, administration and FCC rules. If you'd like to live in beautiful northern Arizona, send resume and salary requirements or call Wen Elliott, KOAI-TV, P.O. Box 1843, Flagstaff, Arizona, 86002. Call (602) 774-1818. 3-77-2t

HOLLYWOOD PRODUCTION HOUSE requires video systems technician, experienced in maintenance of VTR (2" Quad & Helical), video camera, and overall video systems. Production experience an asset. Send complete resume to: Dept. 372, Broadcast Engineering, P.O. Box 12901, Overland Park, Kansas 66212. 3-77-2t

TV MAINTENANCE TECHNICIAN—A major eastern market quality conscious television station is looking for an experienced maintenance technician. Requirements include a minimum of five years working with television equipment. Knowledge of computer technology desirable. A solid engineering educational background is necessary. Top wages for the qualified person. 1st Class FCC license mandatory. An equal opportunity employer. Dept. 370, Broadcast Engineering, Box 12901, Overland Park, Kansas 66212. 3-77-2t

TV TECHS—Techs with strong maintenance background needed for studio and UHF transmitter maintenance. Also need Techs for TV remote operation. All should have digital maintenance experience. Send resume and salary requirements to P.O. Box 77105, Atlanta, Georgia 30357. 3-77-2t

MAINTENANCE SUPERVISOR. Major mkt., Mid-West AM/FM station. AA degree or equiv., 1st class FCC license and min. 3 yrs. experience required. Should know Microwave SHF, UHF/VHF, FM Stereo with SCA & both theory & application of complex AM directional antenna. Must have good ear. Salary \$16-20,000. Relocation. Excellent opportunity for advancement. EEO employer. Send resume to Scudder Kelvie Associates, Mgt. Conslts., 2454 Streetsboro Road, Hudson, OH 44236, 216/653-8427. 4-77-11

EXPERIENCED MAINTENANCE TECHNICIAN for teleproductions house, New York City. Heavy on Ampex 2000's, HS100 systems. Send resume, salary requirements to director of technical operations. Broadcast Engineering, Dept. 375, P.O. Box 12901, Overland Park, Kansas 66212. 4-77-11

BROADCAST ENGINEERING OPPORTUNITIES—(coast to coast). We specialize in the placement of well qualified people in the Broadcast Engineering Industry. Openings at all locations—all levels. Confidential—no cost to applicant. Employer inquiries invited. Contact Alan E. Kornish, KEY PERSONNEL, 116 South Main Street, South Main Towers, Wilkes-Barre, Pennsylvania 18701, (717) 822-2196. 4-77-1t

TIME BASE CORRECTOR REGIONAL SALES openings for East and West Coast. Willing to travel and knowledgeable in television systems. Please send resume to Virgil Lowe, President, Edutron, Incorporated, 3700 B2 N.E. 53rd Avenue, Gainesville, Florida 32601. Equal Opportunity Employer. 4-77-1t

ENGINEER: Installs and maintains CCTV system which includes broadcast quality color cameras, videotape recorders, switchers, monitors and processors. Some shift work. Requirements: First class radio-telephone license; strong electronics background; three years practical experience. Send resume, including salary requirements to Personnel Department, 11011 S.W. 104 Street, Miami, Florida 33176. MIAMI-DADE COMMUNITY COLLEGE. An Equal Access/Equal Opportunity Community College. 4-77-1t

Video Systems Engineers specialized in switching needed by rapidly expanding Vital Industries, Inc. Write personnel: Vital Industries, Inc., 3700 N.E. 53rd Ave., Gainesville, Fla. 32601.

Broadcast Products Division

MANAGER, FIELD SERVICE ENGINEERING, RADIO

Enjoy the Advantages of Being with Harris

Harris is a notably well-managed, solidly successful corporation, now past the half-billion dollar level in sales, and consistently expanding in many communications areas. Our steadily growing division is at the top worldwide in radio and television broadcast equipment.

This position offers exceptional room to show managerial abilities. Responsibilities will be to administer and continually improve our Field Service organization for installation maintenance, and repair of radio broadcast products. You will supervise all activities, guide and direct a staff to attain highest standards, and assist customers with product information and problems. At least 5 years pertinent field experience and a BSEE degree is required. 2 or more years in managerial capacity.

Initial salary will fully reflect your qualifications to fill this challenging position, which carries excellent career potential. Benefits are liberal. Please send resume including salary history data in confidence to Mr. Lawrence E. Carlstone, Professional Employment Supervisor. Harris Corporation Broadcast Products Division, Quincy, Illinois 62301.



HARRIS
COMMUNICATIONS AND
INFORMATION HANDLING

An Equal Opportunity Employer—Male and Female

SENIOR TRANSMITTER ENGINEER

American Electronic Laboratories, Inc., an established leader in the field of electronics manufacturing, has an immediate opening for a senior transmitter engineer who can work on our AM and FM broadcasting equipment. (Transmitters range from 10 watts to 100 kilowatts.)

To qualify, you should have a BSEE and five or more years of experience with high powered transmitters. You should also have knowledge of solid state circuits for low level audio RF and logic applications.

We'll provide you with an excellent starting salary, many worthwhile benefits and totally professional working conditions. To apply, please send your resume, complete with salary history, to: Peter M. Hasse, American Electronic Laboratories, Inc., P.O. Box 552, Lansdale, Pa. 19446.

**AMERICAN ELECTRONICS
LABORATORIES, INC.**

Equal opportunity employer

BROADCAST MARKETING SPECIALISTS

To accommodate a continuing growth pattern, RCA Broadcast Systems is seeking professional specialists in three areas of marketing operations:

BROADCAST SYSTEMS SALES Experience in television station operations and engineering, and/or sales experience in radio, television or related technical fields. BSEE or equivalent is required.

BROADCAST SYSTEMS BID SPECIALISTS To prepare bids and proposals in response to detailed customer specifications and requirements. Good technical knowledge of broadcast and teleproduction studio systems and AM-FM, TV, RF systems. BSEE or equivalent required.

FIELD TECHNICAL SPECIALISTS Experience should cover maintenance and/or operation of cameras, video tape machines or RF products. Technically-oriented specialists willing to travel and expand their knowledge. BS or equivalent required.

Excellent compensation and related employee benefits.

If you qualify, send your resume and salary requirements, in confidence, to: Mr. M. H. Kessler, Mgr. Empl., Dept. BE-4, RCA Corporation, Bldg. 3-2, Camden, NJ 08102.

We are an equal opportunity employer F/M.

RCA

SENIOR APPLICATIONS ENGINEER

**Seeking wider,
more challenging outlets
for your skills?**

We have the right opportunity for you with one of our growing out-of-state divisions...provided you're willing to travel and have previously worked in TV systems design. BSEE or equivalent, and a minimum of 5 years experience required, to include a thorough knowledge of TV systems equipment, and a good understanding of the cameras, camera systems and circuitry involved. Knowledge of infrared systems and associated components would be highly desirable.

We offer an excellent salary and complete benefits. For confidential consideration, send resume with salary history and requirement, to:

H. C. ANDERSON

NORTH AMERICAN PHILIPS CORPORATION

100 East 42nd Street
New York, N.Y. 10017

An equal opportunity employer M/F

BROADCAST ENGINEERING

**ARE YOU SATISFIED WITH YOUR
REFURBISHED VIDEO HEADS?**

Now you can get a better head for \$825!

Are you completely satisfied with the refurbished heads you're using now for your Ampex or RCA quad machines? Surprisingly enough, you might not be if you could inspect and test them as completely as we can, part-by-part, and tolerance for tolerance.

So what's the point? When it comes to the quality of our refurbished heads, we'll put our money where our mouth is. You pay \$895 the first time around, which is itself a full 20 to 25% below the competition. Then the price for that head drops to \$825 thereafter for the exact same refurbishing procedures you got the first time.

How do we do it? Fourth generation tooling and 18 years of experience let us give you a better product at a lower price. So, if you're not completely satisfied with your refurbished heads, send us one or a bunch and let us prove why we're better.

Incidentally, if you're interested in finding out the condition of the head you send in, ask us for an Original Condition Report. It may surprise you.



VIDEOMAGNETICS, INC.

General Office and Marketing
155 San Lazaro Avenue
Sunnyvale, California 94086
(408) 737-8300

In Southern California
Superior Video Services
(213) 786-7060

Studio and Operations
Front at Reagan Streets
Sunbury, Penn. 17801

In Texas and Oklahoma
B.O.B. Associates
(214) 434-2145

For More Details Circle (2) on Reply Card



Station Master.

You can virtually drive coast-to-coast without leaving the sound of a radio station using a Shure microphone. In fact, you'll encounter almost as many different models of Shure microphones as you will states.

Case in point: the Shure SM7. It features a wide-range, ultra-smooth frequency response with show 'n' tell switches that allow the user to select any of four microphone response curves: (1) flat response; (2) presence boost; (3) bass rolloff; and (4) presence boost with bass rolloff.

The SM7 also uses an innovative "air suspension" integral shock mount for super-isolation against mechanical and shock noise.

Ask your Shure dealer for a demonstration of the show 'n' tell SM7. It's one Shure "show" worth telling everybody about.

Shure Brothers Inc.
222 Hartrey Ave., Evanston, IL 60204
In Canada:
A. C. Simmonds & Sons Limited

TECHNICORNER

The Shure SM7 is a unidirectional dynamic microphone with a 40 to 16,000 Hz frequency response. Noise reduction systems cut mechanical noises, breath "pop," wind, and electromagnetic hum. "Add-on" filter devices are unnecessary. The SM7's integral foam wind/"pop" filter reduces even difficult close-up breath sounds. Impedance is rated at 150 ohms for microphone inputs rated from 19 to 300 ohms. Output level: -57 dB (0 dB = 1 milliwatt per 10 microbars); open circuit voltage: -79 dB (0 dB = 1 volt per microbar).



MANUFACTURERS OF HIGH FIDELITY COMPONENTS, MICROPHONES, SOUND SYSTEMS AND RELATED CIRCUITRY.

For More Details Circle (3) on Reply Card