


BROADCAST engineering

AN INTERTEC PUBLICATION

September 1989/\$4.50

F10129890000000 22 09001
TERRY DENBROOK DIR/ENG
KUOW
UNIV OF WASH DS 50 WA 98195
SEATTLE

Audio-video
control:
New solutions
to old
problems

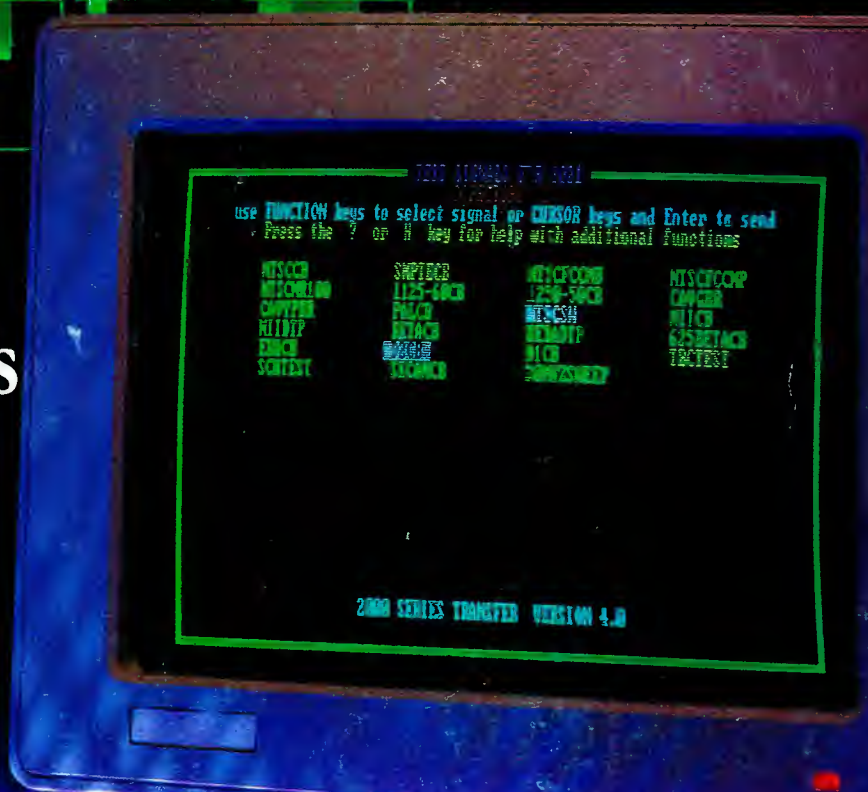



Rev into stereo— With the remarkable new FP32 ENG Mixer.

Introducing the stereo version of our legendary FP31.

Stereo adds incredible dimension and realism to sports and news coverage. And Shure's new compact FP32 Stereo Mixer makes ENG and EFP applications easy and economical.

Consider these advantages:

- Three transformer-coupled XLR isolated inputs and stereo outputs, all switchable to low-impedance mic or line level.
- Dual mini and 1/4" stereo headphone jacks.
- Built-in slate mic and slate tone.
- Battery, phantom, and A/B power (no special power supplies needed).

Plus new stereo advantages:

- Full stereo capability with separate, detented stereo pan pots and monitoring capability.

- Full 48 volt phantom capability.

Size? Only 2⁵/₁₆" x 7¹/₄" x 6", comparable to our FP31. Weight? Just 2¹/₂ pounds. Price? Hundreds less than you would expect. Stereo is here to stay. So is the FP32. For complete information about our full line of field production gear, write or call: Shure Brothers Inc., 222 Hartrey Avenue, Evanston, IL 60202-3696. (312) 866-2553



The new FP42 Stereo Production Mixer — the stereo counterpart to our M267. Four channels with independent center detented pan pots and cuing. Headphone amplifier. Adjustable limiters.

Circle (1) on Reply Card



SHURE

Breaking Sound Barriers

the

SOURCE

The DPS-270 Time Base Corrector... The Last Word in Time Base Correction.



Well Actually, Here's the Last Word... \$2,995.

THE DPS-270 Time Base Corrector. True S-VHS Y/C component processing – at a more than affordable price. The DPS-270 offers S-VHS Y/C and NTSC composite inputs and outputs, as well as a 5.5 MHz bandwidth. This makes the DPS-270 compatible with any $\frac{3}{4}$ " VTR that accepts external sync and subcarrier. And the unit also provides Y/C to NTSC encoding and NTSC to Y/C decoding.

A Quasi-infinite window shuttling circuit gives you a stable picture during tape shuttle and horizontal and vertical Y/C delay controls compensate for the Y/C offset inherent in some S-VHS recorders.

The DPS-270 also offers many available and affordable interface options. Like automatic field correction, chrominance noise reduction and remote control.

So for those of you as concerned about value as you are about quality, remember... one last word... \$2,995. As always backed by Midwest.

For more technical and sales information contact your nearest Midwest office.

See us at Booth #146 at SBE National, Oct. 5-7

Circle (3) on Reply Card



DIGITAL
PROCESSING SYSTEMS INC.


From Midwest Communications –
Exclusive U.S. Distributor.

MIDWEST
Communications Corp.


One Sperti Drive
Edgewood, KY 41017
606-331-8990

Contents

September 1989 • Volume 31 • Number 9

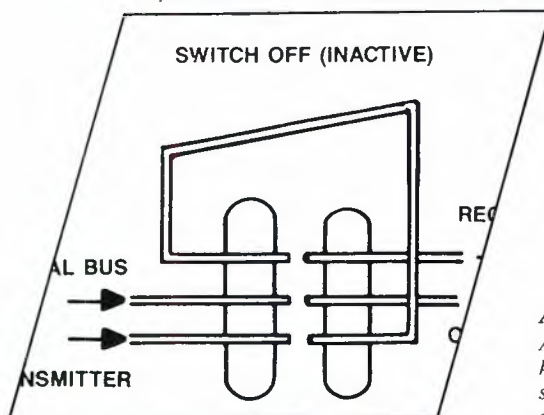

Page 26

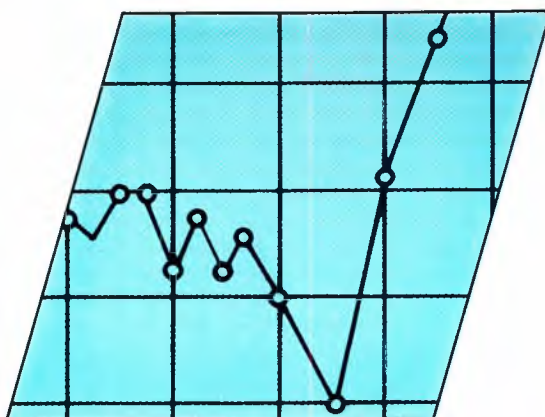

Page 57



Page 116

BROADCAST engineering

AUDIO-VIDEO CONTROL SYSTEMS:

A broadcast facility is a complicated mix of technology. The key to an efficient operation is to make sure all of the systems within a given plant work together and talk to each other. This month, we look at the critical requirements for controlling audio and video signals within a broadcast facility.

26 Switching Fiber-Optic Signals

By Rick Lehtinen, TV technical editor
Fiber-optic routing switches direct light.

42 Writing Applications Programs for a PC

By Ronald Balonis, WILK-AM
Custom programs may be the BASIC answer to engineering problems.

57 The CCD Scoreboard

By Rick Lehtinen, TV technical editor
CCDs experience stellar growth in features and utility.

66 Lenses: Is What You See What You Get?

By Carl Bentz, technical and special projects editor
Lens manufacturers are working to make sure that what you see in the scene is what you see on the screen.

OTHER FEATURES:

72 Designing an FM Booster System

By Steve Broomell, Omega International
An FM booster system might be a valuable addition to your station's technical portfolio, but it requires careful planning.

116 Radio: The Roots of Broadcasting

By Jerry Whitaker, editorial director
AM radio, the grandfather of the broadcast industry, has reshaped our view of the world and of ourselves.

ON THE COVER

Computers have reshaped production and broadcast facilities, providing new solutions to old problems. Once viewed with skepticism by audio and video professionals, computers have become the central control point for many facilities. Shown is a computer-based video test-signal generating system. (Cover provided by Magni Systems, designed by David Henderson and photographed by Tracy Brown.)

DEPARTMENTS

- | | |
|-------------------------|---|
| 4 News | 18 Troubleshooting |
| 6 Editorial | 20 Management for Engineers |
| 8 FCC Update | 90 Show Preview: SBE |
| 10 Strictly TV | 106 Show Preview: SMPTE |
| 12 re: Radio | 108 Field Report: Audio-Technica AT4462 |
| 14 Satellite Technology | 114 SBE Update |
| 16 Circuits | 134 New Products |

Hitachi makes it easy.



NOW, THE RIGHT CHOICE IN ADVANCED CCD CAMERAS IS CLEARER THAN EVER. THE NEW SK-F3 AND SK-F700.

Hitachi presents two new 3-chip CCD broadcast cameras that give you higher resolution and better image quality than you have ever seen before in a broadcast camera.

The SK-F3 dockable and the SK-F700 studio cameras include the newest Frame Interline Transfer (FIT) CCD technology. Smear is virtually eliminated. Sensitivity is dramatically improved.

A 6-speed electronic shutter and contrast function are both built-in. And as for high resolution, the SK-F3 and SK-F700 hit a crystal clear 700 lines.

Your choice for a high performance camera system has never been easier. Learn more about the new SK-F3 and SK-F700. In the studio or in the field, they are clearly superior.

Contact Hitachi, 175 Crossways Park West, Woodbury, NY 11797, (516) 921-7200.

 **Hitachi Denshi America, Ltd.**
NEW YORK • LOS ANGELES • CHICAGO • DALLAS • ATLANTA

By Paula Janicke,
staff editor

Merger ahead?

Chyron Corporation and Midwest Communications Corporation have authorized investment bankers to explore combining the two companies on a tax-free stock-by-stock basis.

Chyron Corporation, Melville, NY, designs, manufactures and markets Chyron, DSC, CMX and Aurora products. Midwest Communications Corporation, Edgewood, KY, is an independent distributor of products and systems to the video and broadcast industries. The combined company would have more than \$200 million in annual revenues and a sales force of more than 250 persons. Currently, Midwest is Chyron's largest customer.

According to Alfred O.P. Leubert, chairman of the board, president and CEO of Chyron, the combination is a natural extension of Chyron's close relationship with

Midwest. Both Leubert and David K. Barnes, president and CEO of Midwest, anticipate prompt finalization of the agreement.

Operational details of the planned combined company have yet to be finalized. Leubert, however, foresees both companies continuing to operate autonomously, with each drawing on the other's strengths.

Cable Labs joins forces with ATTC

Cable Television Laboratories, Boulder, CO, and the Advanced Television Test Center (ATTC) have announced an agreement to cooperatively test high-definition and other advanced TV systems. The agreement stipulates that Cable Labs, a research and development consortium of cable TV system operators, will pay the ATTC up to \$2.5 million over a 3-year period for the use of its facilities and ATV test signals.

The ATTC, which has developed technology to generate test signals for the var-

ious ATV systems, will provide the signals to the various systems operating in a simulated over-the-air broadcast environment. Cable Labs will run these signals through a cable and fiber-optic test bed that approximates an actual cable system. These tests will be used to compile data about the effects of ATV systems that are connected directly to cable systems as well as the effects of cable retransmission of over-the-air broadcast signals.

SBE exam sessions set

Following are the dates scheduled for the 1989/1990 SBE certification exams and application deadlines:

- Oct. 7, coinciding with 1989 SBE convention. (Apply by Aug. 11.)
- Nov. 10-20. (Apply by Sep. 8.)
- March 31, coinciding with 1990 NAB convention. (Apply by Feb. 9.)
- June 8-18. (Apply by April 11.)

1-7-90)))

BROADCAST engineering

Editorial and advertising correspondence should be addressed to: P.O. Box 12901, Overland Park, KS 66212-9981 (a suburb of Kansas City, MO); (913) 888-4664. Telex: 42-4156 Intertec OLPK. Circulation correspondence should be sent to the above address, under P.O. Box 12937. RAPIDFAX: (913) 541-6697.

EDITORIAL

Jerry Whitaker, *Editorial Director*
Brad Dick, *Radio Technical Editor*
Carl Bentz, *Technical and Special Projects Editor*
Rick Lehtinen, *TV Technical Editor*
Tom Cook, *Senior Managing Editor*
Paula Janicke, *Staff Editor*
Dawn Hightower, *Associate Editor*
Suzanne Oliver, *Editorial Assistant*
Andrew Naugher, *Editorial Assistant*
Pat Blanton, *Directory Editor*

ART

Stephanie Swail, *Graphic Designer*

EDITORIAL CONSULTANTS

Fred Ampel, *Audio*
Nils Conrad Persson, *Electronics*
Ned Soseman, *Video*
Michael Heiss, *Consulting Editor*
Don McCroskey, *Consulting Editor*

BUSINESS

Cameron Bishop, *Group Vice President*
Duane Hefner, *Group Publisher*
Stephanie Hanaway, *Marketing Director*
Evelyn Hornaday, *Promotions Manager*
Darren Sextro, *Promotions Coordinator*
Dee Unger, *Advertising Business Manager*
Mary Birnbaum, *Advertising Production Supervisor*
Sally Nickoley, *Advertising Coordinator*

ADMINISTRATION

R.J. Hancock, *President*
Chuck Rash, *Corporate Circulation Director*
Sandra Stewart, *Circulation Director*
Doug Wilding, *Circulation Manager*
Customer Service: 913-541-6628
Kevin Callahan, *Creative Director*

TECHNICAL CONSULTANTS

Eric Neil Angevine, *Broadcast Acoustics*
John H. Battison, *Antennas/Radiation*
Blair Benson, *TV Technology*
Dennis Ciapura, *Radio Technology*
Dane E. Erickson, *Systems Design*
Howard T. Head, *European Correspondent*
Wallace Johnson, *FCC/Bdct. Engineering*
John Kean, *Subcarrier Technology*
Donald L. Markley, *Transmission Facilities*
Harry C. Martin, *Legal*
Robert J. Nissen, *Studio/Communications*
Hugh R. Paul, *International Engineering*
Art Schneider, *A.C.E., Post-production*
Elmer Smalling III, *Cable/Satellite Systems*
Vincent Wasilewski, *Communications Law*

MEMBER ORGANIZATIONS

SUSTAINING MEMBERS OF:

- Acoustical Society of America
- Society of Broadcast Engineers
- Society of Motion Picture and TV Engineers

Member,
Association of Business Publishers



Member,
Business Publications
Audit of Circulation

BROADCAST ENGINEERING is edited for corporate management, engineers/technicians and other station management personnel at commercial and educational radio and TV stations, teleproduction studios, recording studios, CATV and CCTV facilities and government agencies. Qualified persons include consulting engineers and dealer/distributors of broadcast equipment.

BROADCAST ENGINEERING (ISSN 0007-1794) is published monthly (except in the fall, when two issues are published) and mailed free to qualified persons within the United States and Canada in occupations described here by Intertec Publishing Corporation, 9221 Quivira Road, Overland Park, KS 66215. Second-class postage paid at Shawnee Mission, KS, and additional mailing offices. POSTMASTER: Send address changes to **Broadcast Engineering**, P.O. Box 12960, Overland Park, KS 66212.


SUBSCRIPTIONS: **Broadcast Engineering** is mailed free to qualified persons in occupations described above. Others may subscribe at the following rates: United States, one year, \$50; all other countries (surface mail), one year \$60. Rates include postage. Foreign air mail and Canadian first class options are available at the annual subscription rate of \$115. Single copy price \$4.50, except for the annual Buyers' Guide/Spec Book, which is \$20. Back issues, when available, \$5; Buyers' Guide/Spec Book back issues \$23. Adjustments necessitated by subscription termination at single copy rate. Allow six to eight weeks delivery for change of address or new subscription.

Photocopy rights: Permission to photocopy for internal or personal use is granted by Intertec Publishing Corporation for libraries and others registered with Copyright Clearance Center (CCC), provided the base fee of \$2.00 per copy of article is paid directly to CCC, 21 Congress St., Salem, MA 01970. Special requests should be addressed to Cameron Bishop, group vice president. ISSN 0007-1794 \$2.00 + \$0.00.

©1989 by Intertec Publishing.
All rights reserved.

Advertising offices listed on page 143.

INTERTEC
PUBLISHING CORPORATION

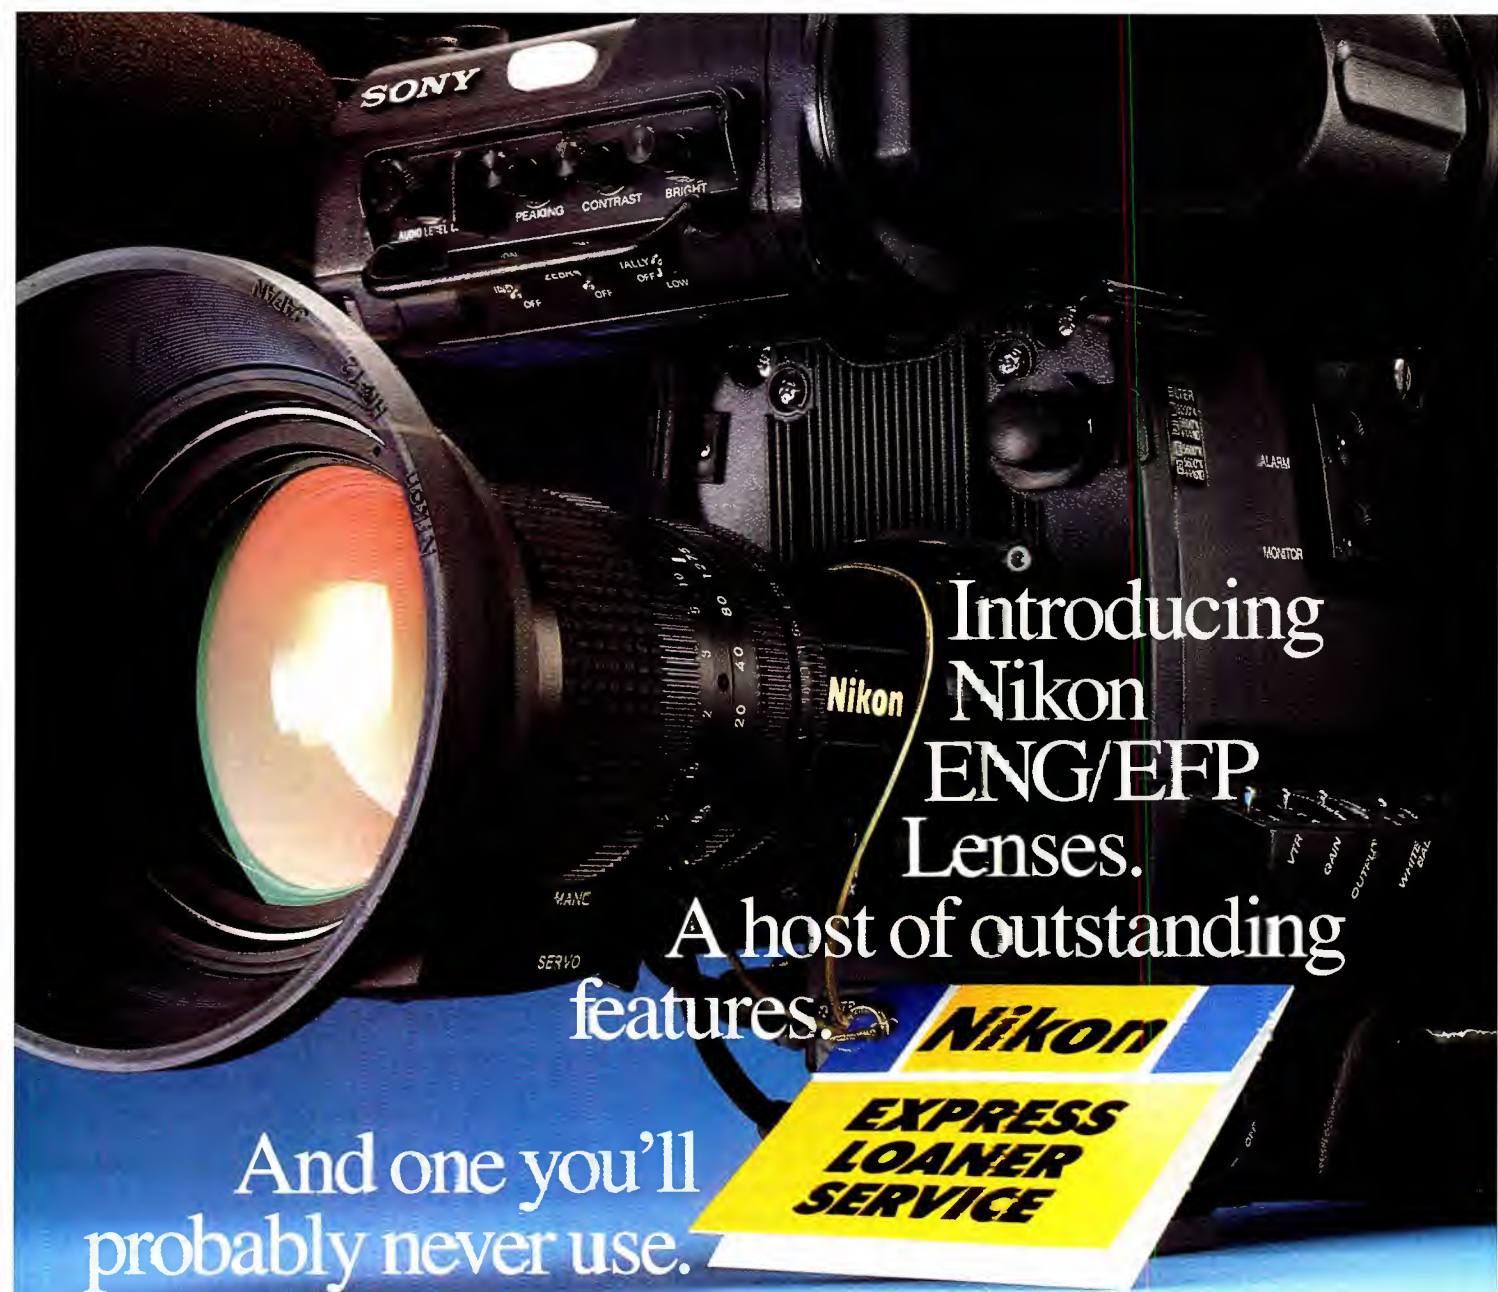

Introducing Nikon ENG/EF Lenses.

A host of outstanding features.

And one you'll probably never use.

Selecting an ENG/EF lens for your $\frac{2}{3}$ " CCD camera is a creative decision. It should be lightweight, responsive and zoom smooth as silk at any speed. Its design should utilize Extra-low Dispersion Glass to minimize chromatic aberration. It should include an anti-reflection coating for improved spectrum transmission ratio. And it should have an advanced design that improves corner resolution and produces a high, flat MTF curve. In short, it should be a Nikon.

But selecting an ENG/EF lens is also a business decision. And on that score we provide something almost as compelling as Nikon quality — our unique Express Loaner Service. Simply register the Warranty, then in the unlikely event your lens needs service we'll get you a loaner lens overnight. All your investment in equipment

and crews is more secure than ever before.

A service like this is remarkable in itself. But not quite as remarkable as our lenses.

As with all Nikon products, our new ENG/EF lenses have all our renowned quality, tradition and technology built right in. Our growing line is also fully accessorized, including adapters that allow the use of your entire arsenal of Nikkor 35mm SLR camera lenses for special effects.

To find out more, call Nikon Electronic Imaging at (516) 222-0200 or write for our complete brochure: Nikon Electronic Imaging, Dept. D1 101 Cleveland Avenue, Bayshore, NY 11706.

Nikon
ELECTRONIC IMAGING

© 1989 Nikon Inc.

Circle (5) on Reply Card

Class A FM power increased

By Harry C. Martin

The commission has increased the maximum effective radiated power for FM Class A from 3,000W to 6,000W. To qualify for the increased power, Class A stations must meet new separation requirements for Class A and all other FM classes. To maintain the current level of protection for existing stations, the commission refused to adopt an across-the-board 6kW increase.

In November, the commission will publish a list of approximately 500 existing Class A stations at locations that presently meet the new separation requirements. If the licensee of a listed station can increase power through simple technical means (by increased transmitter power), it will be allowed to do so on or after Dec. 1 of this year, as long as the public would not be subjected to RF radiation in excess of ANSI levels. These licensees must simply notify the commission when they begin operation with increased power and file an FCC Form 302 within 10 days of the increase. Licensees of other Class A stations, and those stations that do not meet ANSI standards, will be required to obtain a construction permit by filing an FCC Form 301 establishing compliance with all FCC rules.

If an existing Class A station does not meet the new separation requirements, it will be "grandfathered." Grandfathered stations will be permitted to relocate or make modifications under the previous power limit and separation requirements, or under technical conditions that present no greater potential for interference than the previous limit, such as through the use of a directional antenna.

Multiple ownership rule changes

The commission has affirmed its action in February 1989 relaxing the broadcast multiple ownership rules. At that time, the FCC decided to retain its one-to-a-market rule, but established a new waiver policy for common ownership of radio and TV stations in the same market.

Under the one-to-a-market waiver poli-



cy, the FCC will look with favor upon waiver applications involving radio and TV station combinations in the top 25 markets where at least 30 separately owned, operated and controlled broadcast licenses or "voices" will exist after the proposed combination.

The FCC also will look favorably upon waiver requests for proposed combinations involving at least one "failed" station (a station that has not been operating for a substantial period of time or that is involved in bankruptcy proceedings). For proposed combinations not meeting either of these criteria, a more rigorous case-by-case analysis would be made. The analysis would include consideration of the following factors: the types of facilities involved, the number of stations already owned by the applicant, the financial difficulties of the stations and the nature of diversity and competition in the market. However, no waiver application would be granted if the proposed combination would result in any one entity holding an attributable interest in more than one AM and one FM radio station within any single TV "metro" market.

The commission also decided to modify its previous statement barring waivers that involved combinations of a TV station and more than one radio station in the same service. It said a flat prohibition precluded the FCC from evaluating, on a case-by-case basis, combinations that could be demonstrated to be uniquely in the public interest. However, the FCC emphasized it did not foresee approving any combination involving a TV station and more than one radio station in the same service unless it could be demonstrated that the combination would provide unique public interest benefits.

Antenna lighting requirements enforced

The commission has fined a California station \$8,000 for not lighting its tower. The station was fined an additional \$1,000 for indicating in its station log that the lighting had been inspected and was functioning.

The commission again has warned licensees that it will continue close scrutiny of antenna towers to ensure that they

are properly marked and lighted. Daily inspections are required to ensure that the lights are on and operating properly. If an outage occurs, the local FAA flight service station must be contacted immediately.

Station personnel must be fully aware of these requirements and make sure the proper inspections are being made. The commission is monitoring this matter carefully. Failure to comply could result in a substantial fine.

Sonrise to be investigated

In response to information indicating that its processes may have been abused by Sonrise Management Services, the commission has instituted an investigatory proceeding pursuant to section 403 of the Communications Act. Documents on file with the FCC indicate Sonrise may have sponsored more than 160 FM applications over the past several years, only a few of which ever have been granted.

The information before the commission raised serious questions as to whether Sonrise, its applicants and their attorneys, consultants and advisers engaged in a pattern of conduct constituting an abuse of the commission's processes and violations of the Criminal Code.

The commission concluded that, in view of the more than 160 applicants created by Sonrise, a single investigatory proceeding is warranted to consider whether such violations have occurred. The commission stated that it is appropriate for the Mass Media Bureau to develop a record that fully considers all aspects of Sonrise's activities concerning any and all applications that have been dismissed and that are no longer the subject of a pending or proposed hearing proceeding.

The commission directed that the presiding administrative law judge complete the investigation soon so that a final report can be promptly submitted by the chief, Mass Media Bureau, to the Criminal Division of the Department of Justice.

Martin is a partner with the legal firm of Reddy, Begley & Martin, Washington, DC.

Editor's note: For additional FCC information, IGO BPFORUM on CompuServe. [:(~)]

When no difference makes all the difference do it with



NTSC ENCODE SYSTEM

Seeing is believing...and we believe you'll find it difficult to see the difference between EMPHASYS encoded video and the original RGB source!

Grass Valley Group introduces next generation NTSC digital encoding technology at SMPTE! The EMPHASYS NTSC encode system, a revolutionary new digital encoding technology, that delivers what you would expect of a digital encoder...and more!

EMPHASYS provides 16 different filter combinations for encode processing and artifact removal, giving you the flexibility to adjust to your video requirements. Your interface to EMPHASYS is all front panel control (plus parallel and serial remote) through a unique keypad and LCD. Quick and

easy system operation is at your fingertips without any internal tweaks.

Did we mention system control? EMPHASYS is a system, designed and built to address system applications. Among standard features:

- An on-board SPG -- it only requires color black
- Advance reference for back-timing sources
- Accepts any CAV format
- Color, mono, mono no burst modes
- Luma boost
- Self diagnostics
- E-MEM
- NTSC and D2 composite outputs!

There's more...but you'll have to stop by the Grass Valley booth to see the EMPHASYS encode technology -- where no difference makes all the difference.

Grass Valley Group®

A TEKTRONIX COMPANY

THE GRASS VALLEY GROUP INC.
P.O. Box 1114, Grass Valley, California 94549 USA
Tel (916) 478-3000
TRT 160432

OFFICES: New York (201) 845-7988; District of Columbia (301) 622-6313; Atlanta (404) 493-1255; Miami (303) 477-5583; Chicago (219) 264-0931; Minneapolis (612) 483-2594; Dallas/Fort Worth (817) 483-7447; Los Angeles (818) 999-2303; San Francisco (415) 968-6680; GVG International Ltd. (UK) +44-962-843939; Grass Valley Group Asia (HK) +852-3-7396632

Circle (7) on Reply Card

www.americanradiohistory.com

Exploring battlefield fiber

By Rick Lehtinen,
TV technical editor

Fiber-optic signal systems have proved their worth in a variety of situations. One niche for which they were thoroughly touted, however, was rarely used; electronic news gathering (ENG). Fiber just wasn't tough enough, and the terminal gear was heavy.

Because of military requirements for non-jammable observation and communications systems, many government dollars have gone into perfecting fiber-optic equipment. The result; fiber-optic equipment that is both lightweight and reliable. The new fiber-optic gear is battle-rugged, and is sure to resist the destructive instincts of even the most aggressive ENG photographers.



Figure 1. Tele-operated platform pays out fiber as it wanders over nearly any terrain. A fiber remote-control cable sends signals back to the operator.

Battlefield fiber has three broad uses. The first is FOG-M (fiber-optic-guided missile). These missiles are wire-guided. The projectile streams fiber out behind it as it flies. Signals from the bazooka-like launching device are transmitted up to the missile, allowing it to steer toward its target. The noise immunity of the fiber tether resists attempted jamming of the control information as it propagates up the tether.

A second battlefield fiber application is the aerial balloon or remotely piloted vehicle (drone). These devices float or fly near the front, and send back pictures of what lies ahead.

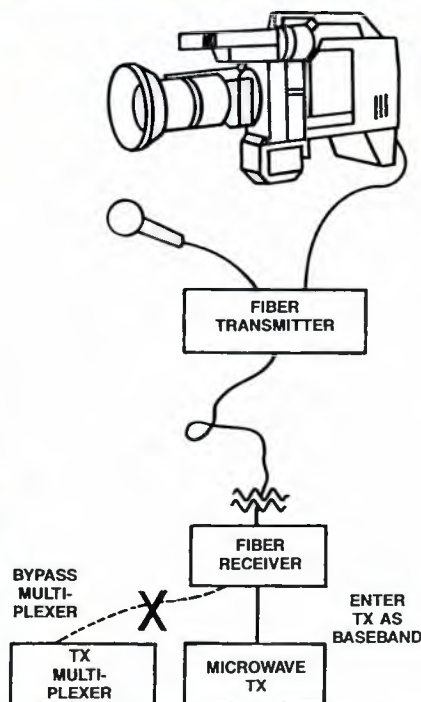


Figure 2. User-adjustable audio subcarrier frequencies on an advanced fiber-optic system allow video and audio signals to be transmitted in a baseband format from the camera into the station. This eliminates many conversion steps, greatly reducing noise degradation of the microwave signal.

A more down-to-earth fiber application is the tactical multipurpose automated platform, or TMAP. (See Figure 1.) The 600-pound, diesel-electric platform is hinged in the middle for agility and sure-footedness. It can negotiate almost any terrain. Observation cameras and laser range finders may be fixed to a remotely controlled pan and tilt head, and the device can be sent forward to stalk tanks or map minefields. It also can serve as an artillery spotter.

Of course, weaving through the woods and over rocks is hard on fiber. Apparently the fiber, developed by a division of Corning, is worthy of the challenge. The connectors are tough metal affairs about the size of a hunting knife handle. It's been said that if you were to connectorize the bumpers of two cars, the fibers and

connectors could be used as a towrope. Tanks have danced on this stuff. If you knot the fiber and pull it tight, it will still operate. This sort of treatment would shut down most broadcast fibers right away.

Terminal gear

Of course, such tough fiber is of little use if the terminal gear on either end is too bulky for portability. The good news is, it's not. The company marketing the system to the video industry had the good sense to hire a designer familiar with broadcasting. This resulted in a series of portable, rugged systems, with the smallest unit nearly the size of an intercom belt-pack. The subcarriers used to carry the audio from the camera end back to the receiver are user-adjustable to match the subcarriers used in the station microwaves. This means that at the ENG truck end, the fiber output can be plugged into the transmitter as a baseband signal, avoiding a stage of decoding and recoding. If another system was installed between the ENG receive point and the studio, the signal could be kept in baseband all the way home. (See Figure 2.) It would result in a tremendous improvement in signal-to-noise ratio for both the audio and video portion of the received ENG signals.


Acknowledgment: The author wishes to thank Jusse Rasmisel, PCO, Chatsworth, CA, for his assistance in preparing this article.

[:(-=))]]

Not for amateur radio.

You're no amateur at this game, so why play around with amateur CD players in the studio? You've tried consumer models in the past, just to see if they'll work long enough to make sense. We can understand that. But in the long run, they *don't* make sense. And you know it. Even modified or beefed up versions have given you headaches. . . wrong levels, hifi connectors, too many buttons or the wrong ones. Not to mention skips, mutes and breakdowns. Why take chances playing around with an amateur deck in a pro application? Leave that home player at home where it belongs. Check out the Studer A727 and A730—pro players for radio pros.

A727 ▶ Thousands of A727's prove their reliability in radio stations all over the world—*everyday*. The A727 provides full 16-bit resolution with 4x's oversampling—plus powerful error correction circuits to protect against on-air problems from damaged or dirty discs.

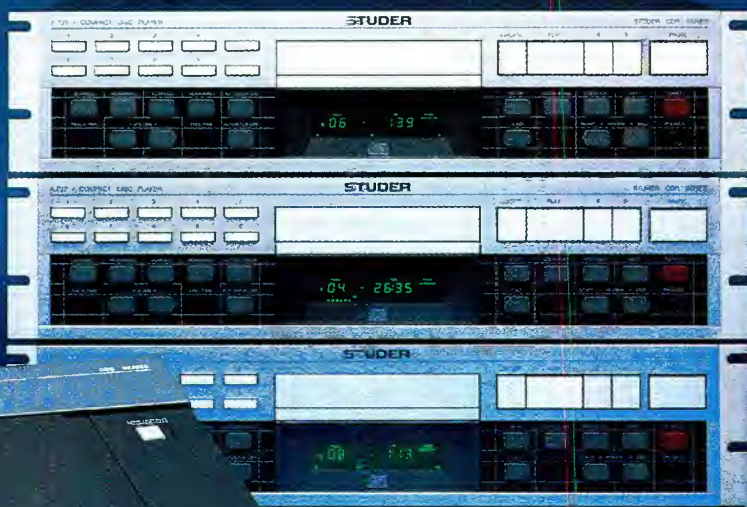

Designed for fast, creative production play, the **A730** is the newest addition to the Studer line of Pro CD players. This machine can recognize 100 discs and store up to 3 start cue points per disc. Its die-cast aluminum transport is built for professional use.

FEATURE	A727	A730	"Brand X" Player	FEATURE	A727	A730	"Brand X" Player
Fader Start	▼	▼		Disc Recognition		100 discs	
Parallel Remote w/Tallies	▼	▼		Varispeed Built-in		▼	
Start & End Review	▼	▼		End of Modulation Sense		▼	
End of Track Alarm	▼	▼		Monitor Speaker		▼	
RS422 Serial Control	▼	▼		Separate PGM & Monitor Outputs		▼	
System Clock in/out	▼	▼		Remote Monitor Speaker Mute		▼	
Digital Output	▼	▼		Audio Channel Reset		▼	
Die-cast CD Drive	▼	▼		Rack Mounts Standard	▼		
Cue Memories		3		Flush Mounting		▼	

Go ahead. Make the comparison.

Before those amateur machines break again, call your Studer Revox Full-Line Dealer, or contact us directly.

STUDER REVOX

Studer Revox America, Inc. ▶ 1425 Elm Hill Pike ▶ Nashville, TN 37210 ▶ (615) 254-5651

Los Angeles, (818) 780-4234. New York (212) 255-4462.

In Canada, Toronto (416) 423-2831.

Circle (8) on Reply Card

www.americanradiohistory.com



Taking the measure of your station

By John Battison, P.E.

Bandwidth compliance, or *splatter control*, is now one of the hottest items on the FCC's agenda, and the means of checking it are limited. Can a selective receiver with a crystal filter be used to check bandwidth compliance? I don't think that such an instrumentation would be adequate to satisfy the requirements, because the time needed to set up the device and make the measurements would be excessive. I recommend an alternative approach.

What is splatter?

Just what is splatter? You won't find it in any technical dictionary yet, but a definition like this may soon appear: Splatter is the undesired portion of a station's output spectrum caused by modulation. Therefore, power-supply hum, sidebands and RF harmonics are not splatter, nor are co-channel and first-adjacent channel interference normally considered to be splatter. However, second- and higher-adjacent channel interference *is* splatter.

Engineering definitions depend partially upon engineering opinion as shaped by regulation. As most of us know, the presence of high-frequency audio components at the modulator input is the main cause of splatter. We're not going to discuss the problems associated with clipping and limiting. However, a typical source of splatter is inadequate clipper filtering.

Transmitting the higher-order transmission sidebands not only wastes power, because listeners cannot hear them, but these high audio frequencies also intermodulate in the transmitter and produce distortion in the audible, desired portion of the signal.

Incidental phase modulation (IPM) also can result in increased splatter. Phase modulation sideband pairs resulting from IPM also will affect envelope detectors, if they have been distorted by asymmetrical bandpass circuits. The tuned circuits convert some energy into AM sidebands, which adds distortion.

Poor man's spectrum analyzer

To the best of my knowledge, there is only one manufacturer of splatter monitors, so I don't think that I'm showing any bias by discussing its use as a poor man's spectrum analyzer.

Most engineers probably think of the monitor as being rack-mounted and stationary. Delta makes a device known as an *active whip antenna* that disproves that idea. Because the monitor operates from 240Vac down to 12Vdc, it can be powered from a standard 12Vdc cigarette lighter.

An engineer equipped with such a monitor and whip antenna can visit the client and spend an hour checking the emission bandwidth to complete an emission report. Although NRSC-1 users are not required to develop such a report, other stations must complete some type of bandwidth measurement.

Monitoring splatter is also invaluable when, for example, an uncooperative station is overmodulating and transmitting an overly compressed signal that produces splatter. A quick check of the offender's signal gives management a big stick to wield if necessary. The process also shows both managers the advantage of having an engineer on the staff.

Assuming that you have NRSC-1 in use, how do you know that it is performing as designed? The splatter monitor will evaluate this for you (which should impress the manager and program director). They can see how their station compares with others and what the NRSC-1 filter really accomplished.

Performing mobile measurements is worth a reasonable extra fee for a contract engineer, or for a chief engineer who might own one and offer moonlight services. It certainly should not be included in the regular contract engineer service.

Delta has prepared a "Sideband Measurements" form, which is available from John Bisset along with a complete package of emission bandwidth material. Contact the company for additional information. Inclusion of a similar, properly prepared form in the maintenance log should ensure a safe visit from the FCC.

An extra benefit of monitoring splatter is that it provides a simple way to monitor IPM. Older transmitters with modula-

tion problems or improperly adjusted audio feedback circuits often sound mushy, or have more blurred sound rather than clearly heard individual notes.

By using the "0kHz to 100kHz" measurement position, you can measure IPM and reduce it if necessary. First, make sure that the transmitter is tuned properly and modulation levels are set. New modulator tubes also are a good investment. Feed no more than 50% modulation into the transmitter (mono), and read incidental quadrature modulation IQM (this is almost the same as IPM at low modulation levels). It probably will indicate about -10 on the meter if the transmitter has not been optimized. Naturally, the lower the reading, the better the operation.

Adjust the tuning controls and plate neutralizing capacitor for minimum IQM. It often is possible to produce amazing results in this manner, especially in older, less precisely neutralized transmitters. A final reading of -25 or lower should offer a noticeable improvement in clarity.

Field applications

I recently had the opportunity to use a splatter monitor and active whip antenna. I drove to an area where the signal strength was high and installed the equipment in my car by plugging it into the cigarette lighter. I placed the antenna on the car roof and tuned in the station.

Following the manual's instructions, I measured my client's splatter. This particular station is using NRSC-1, and as expected, the monitor showed compliance. I then went to the station and connected the device into the modulation monitor feed.

After setting up the equipment, I measured IPM (IQM). It was a poor -9 . Adjusting the transmitter neutralizing capacitor proved difficult. I had to open interlocks and go inside to adjust the knob, then close the back, fire up and make a measurement. Once I discovered which way to turn the capacitor, I quickly brought IPM down to -26 . The improved clarity of the signal was quite noticeable, and my client was highly impressed.

Battison, BE's consultant on antennas and radiation, owns John H. Battison and Associates, a consulting engineering company in Loudonville, OH, near Columbus.

D-2? OF COURSE.



Tektronix combines world-proven performance and up-to-the-minute technology in equipment to fit your operations, monitoring and maintenance requirements of the D-2 environment. Feature for feature, it's what you expect from Tektronix.

The 1730 D-2 Waveform Monitor features measurement quality D-2 decoding with Tek's own precision DAC. You get digital D-2 and standard analog input capability for NTSC applications. Both inputs can be viewed simultaneously. And decoded D-2 analog output can be displayed on-screen

or routed from a rear panel connector to the location of your choice.

Also included are features that make the 1730 the world's most popular line of high-performance waveform monitors. Front panel recalls. Full line select. Dual filter, dual channel display. And add a 1720 Vector-scope for decoded D-2 vector display.

The TSG-170D Digital Composite NTSC Generator offers test signals and audio tone in digital and analog form, plus analog black burst for equipment synchronization. You get 12-character identification,



tape leader countdown and digital genlock with output timing offset. All in a cost-effective package.

Get the full story. Ask your Tektronix representative for a demonstration.

Of course!

Tektronix®
COMMITTED TO EXCELLENCE

Circle (9) on Reply Card

www.americanradiohistory.com

Team goes to work in robotics center

By Elmer Smalling III

NASA's Goddard Space Flight Center has opened its robotics facility, where Goddard's robotics team will create, test and evaluate new robotic technologies to support the upcoming space station. The nucleus of this center will be the Flight Telerobotic Servicer (FTS), a robotic device that combines tele-operation (remote human manipulation) with autonomous capabilities for performing space station tasks.

The new facility contains a gantry robot, which is 40 feet wide, 60 feet long and 20 feet high, with six degrees of freedom. The robot is capable of lifting up to two tons of payload and applying 4,000 foot-pounds of torque. Suspended from one mast of the gantry will be a set of tele-operated industrial arms, which will be used as an FTS operational simulator. Another mast carries a grapple to emulate the space station's remote manipulator system, the SPDM (Special Purpose Dexterous Manipulator). It will be used primarily to transport payloads to and from the work site. (See Figure 1.)

Smalling, BE's consultant on cable/satellite systems, is president of Jenel Systems and Design, Dallas.



The new Goddard facility also includes an operator workstation installed in a mockup of the space shuttle's flight deck. This simulator will permit manipulation of the robot, providing valuable information about the operation of FTS in the constrained environment of the shuttle.

The simulator uses computer-animated graphics to determine such things as the robotic assembly's reach capability and to provide collision-avoidance information. High-level robotic engineering, developed around the world, will go into the FTS project. This project will produce many beneficial spin-offs for the general public, and also will improve and advance the already state-of-the-art fields of artificial intelligence and knowledge-based systems technology.

Medical space bridge

In more down-to-earth matters, in May, dozens of medical-center physicians in Baltimore, Houston, Salt Lake City and Bethesda, MD, took part in satellite teleconferencing from 9 a.m. to 1 p.m. daily to discuss cases. What made it unique is that they were conferring with physicians and other medical personnel in

Armenia (near the site of the great earthquake), Moscow and the city of Ufa (in the Ural Mountains, where a train gas explosion killed and injured hundreds).

Using the audio and video capabilities of satellite telecommunications, the physicians discussed difficult medical and surgical cases that involved plastic and reconstructive surgery, orthopedics, prosthetics, burn treatment, epidemiology and psychological treatment. The patients often were present at these conferences, along with their CT scans, X-rays and other relevant data. The physicians were able to learn a lot from viewing patients in addition to reading and interpreting their transmitted vital statistics. The project was named the "U.S./Soviet Space Bridge."

This sort of remote diagnosis could be used in areas of this country where sophisticated medical help is not available. In the early 1970s, a government project to remotely diagnose medical problems using TV pictures transmitted by satellite was unsuccessful because of picture-quality problems inherent with the low-cost color cameras then available. Exact tissue color is crucial in many diagnoses. Now that rugged, inexpensive TV color cameras and high-quality fiber-optic and satellite transmission systems provide true-to-life color, remote diagnosis is quite feasible.

Titan military launch

The Titan 34D launch vehicle proved itself once again with the launch on May 10 of two DSCS (Defense Satellite Communications Systems) satellites from Cape Canaveral. These satellites will be used for communications between the White House and military commanders around the world. When complete, the DSCS system will consist of four of these satellites spaced equidistantly around the globe in geosynchronous orbit.

The satellites are 3-axis, stabilized devices with attitude control provided by four inertial reaction wheels, 0.3- to 1-pound thrusters powered from a 600-plus-pound hydrazine reservoir, and Earth and sun sensors. The antenna system includes a 60-beam-forming network for exact spot coverage as well as for protection against jamming.

||:~::~))]]


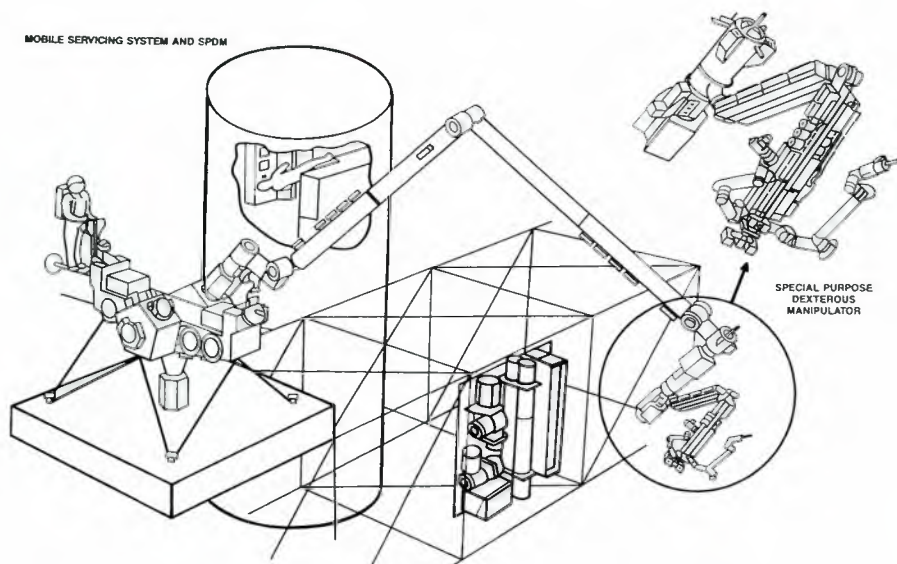


Figure 1. Special-Purpose Dexterous Manipulator is shown deployed on a shuttlelike arm, a part of the Flight Telerobotic Servicer system.

The cart machine with bells and whistles your audience will never hear.

Finally, a cart that delivers the creature comforts that other Otari audio machines have offered for years! And not only does Otari's CTM-10 make your job easier, it also delivers outstanding audio performance, so your output sounds more like a CD player than a cart.

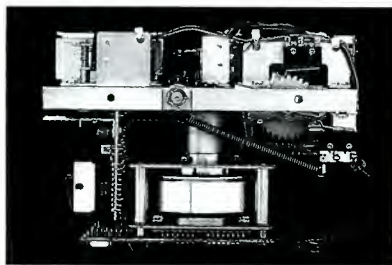

Heavy duty, direct drive capstan provides accuracy and reliability.

You get extensive metering, including dedicated metering for the cue-track. (Now you can verify the cue-tone *before* you go

on-air!) And for adjustments to program length, there's a *true* vari-speed control.

You'll also find a record azimuth adjustment system *with phase display* for when you want to make the best recording possible.

But the CTM-10 is not all just bells and whistles. It's the only cart you can buy with HX-Pro.* That means that you can get a really hot signal off the tape, and still keep those high frequencies where they need to be for that crisp, clear sound.

And some things we keep real cool, like we don't use solenoids for our pinchroller because they can generate excess heat. You'll also appreciate the CTM-10's fast start time—it lets you cue up tighter without worrying about wow.





Equalization adjustments are easy to reach and clearly marked, making maintenance and service fast and easy.

And, of course, we give you choice. There are stereo *and* mono record/play decks, *and* a mono/stereo play-only deck.

Call us at (415) 341-5900 for more information about the CTM-10. The cart machine we built for perfectionists.

OTARI

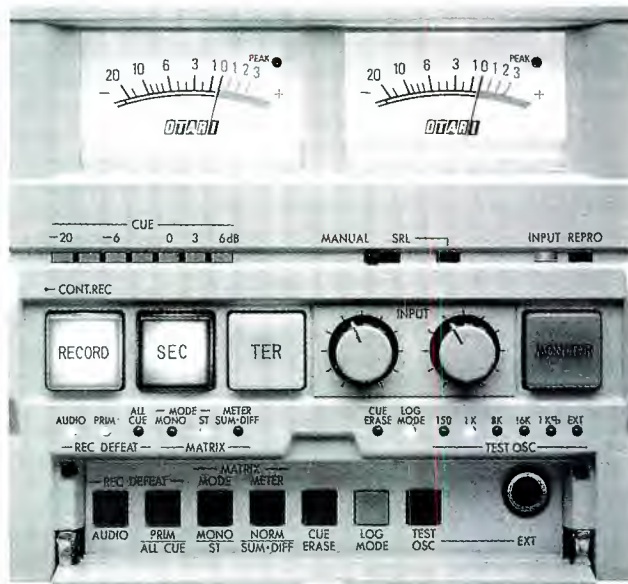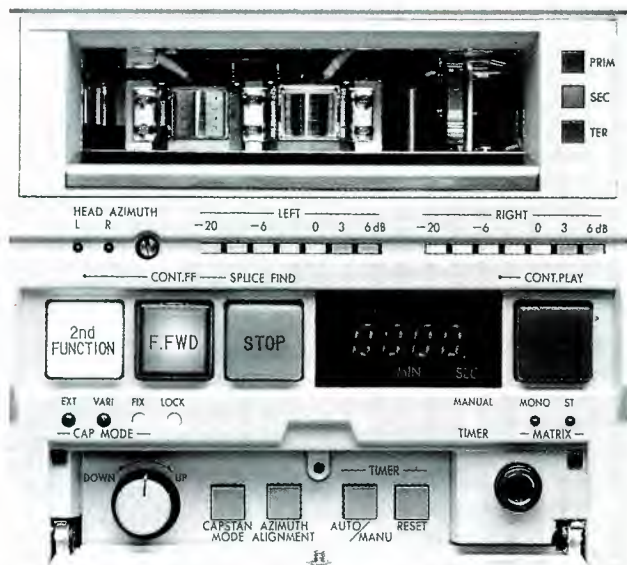

*HX-Pro is a trademark of Dolby Laboratories Licensing Corporation

Using thermistors for time delay

By Gerry Kaufhold II


With some thermistor circuits, designers must make sure that current flow in the lead wires of a thermistor doesn't lead to self-heating, which would introduce errors in measuring and controlling temperature. A thermistor application also can use self-heating as an integral part of circuit operation. These circuits include time delays, surge suppression, overload protection and timing circuits.

For a thermistor with a negative temperature coefficient (NTC), the resistance decreases as the temperature increases. To use an NTC thermistor for timing, apply energy to the thermistor to make it self-heat. Be sure to choose a thermistor that exhibits the correct self-heating characteristics, and the mechanical design of the circuit must allow for the heat to be dissipated safely. The current-vs.-time relationship for self-heating is non-linear. To choose a thermistor, first define the circuit's electrical requirements, then refer to a chart of published values.

Time delays

For a time-delay circuit, apply a low-impedance voltage source to the thermistor circuit. Initially, the resistance of the thermistor is relatively great, about 10k Ω .

Kaufhold is a market development engineer for SGS-Thomson Microelectronics, Phoenix.

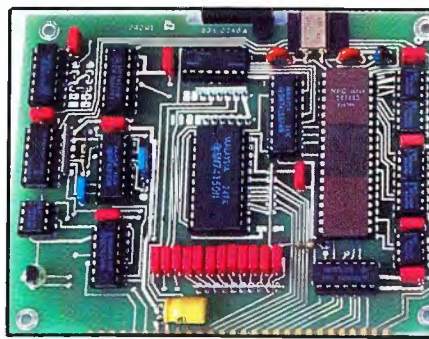

As current begins to flow in the circuit, the resistance converts electrical energy into heat. As the thermistor warms, its resistance decreases and current flow increases. This creates more heat, further reducing the resistance of the thermistor.

Usually, a differential amplifier with high input impedance is configured as a comparator and connected across the thermistor. When a threshold current level is reached, a control circuit energizes to accomplish the desired function. In the circuit of Figure 1, the initial voltage across the thermistor is approximately equal to the supply voltage, because the thermistor resistance swamps the effect of the voltage divider resistor. As the thermistor self-heats, the voltage across the thermistor decreases until the differential amplifier triggers a relay.

Automatic reset

The delay of this circuit is a function of thermistor temperature. If the thermistor is already heated, the delay period may be shortened. The full time delay may occur only on the first power-up sequence. For most applications, a time-delay is used to protect something. It may prevent the plate voltages from energizing before the filaments have adequately warmed, or it may limit inrush currents to power-supply capacitors to prevent surge currents from

damaging cold tube filaments. To accomplish such tasks, the thermistor circuit must automatically cool down and reset, so that protection is provided on each power-up cycle. This requirement adds complexity to the simple time-delay circuit.

Thermistor time-delay circuits are reset automatically by latching the delayed device at the end of the time delay and removing power from the thermistor circuit to cool it. At power up, V+ is applied through the normally closed contacts of K1 to the top of the thermistor. (See Figure 1.) When cooled to ambient temperature, the thermistor is 10k Ω . As current begins to flow, the thermistor heats, charging capacitor C1 through a voltage divider composed of the thermistor, R1, and R-TD. R-TD obtains the desired time delay, which can range from a few seconds up to several minutes. During this time, ac current is flowing through the 10 Ω , 2W resistor, slowly heating the filaments of tube V1 and charging capacitor C2. This illustrates the surge protection functions of the circuit.

When the voltage on C1 exceeds the voltage at test point 1 (TP1), the op-amp drives current through D1, energizing the relay coil. At this time, relay K2 pulls in, providing full current to the tube filament and capacitor C2. Relay K3 also pulls in, applying the high voltage. Diode D2 conducts through the coil of K1/K2 to keep it energized. Diode D1 blocks voltage from flowing back into the op-amp. As long as K1 is energized continuously, the thermistor has time to cool, resetting the circuit for the next power-up sequence.


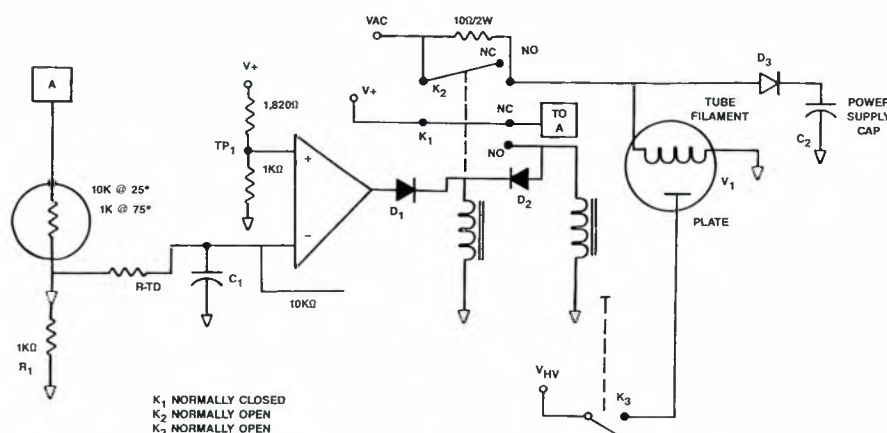


Figure 1. Self-heating properties of thermistors can be used to form time-delay circuits. In this example, the cathode is warmed before applying plate voltage and protects cold cathode from inrush current.

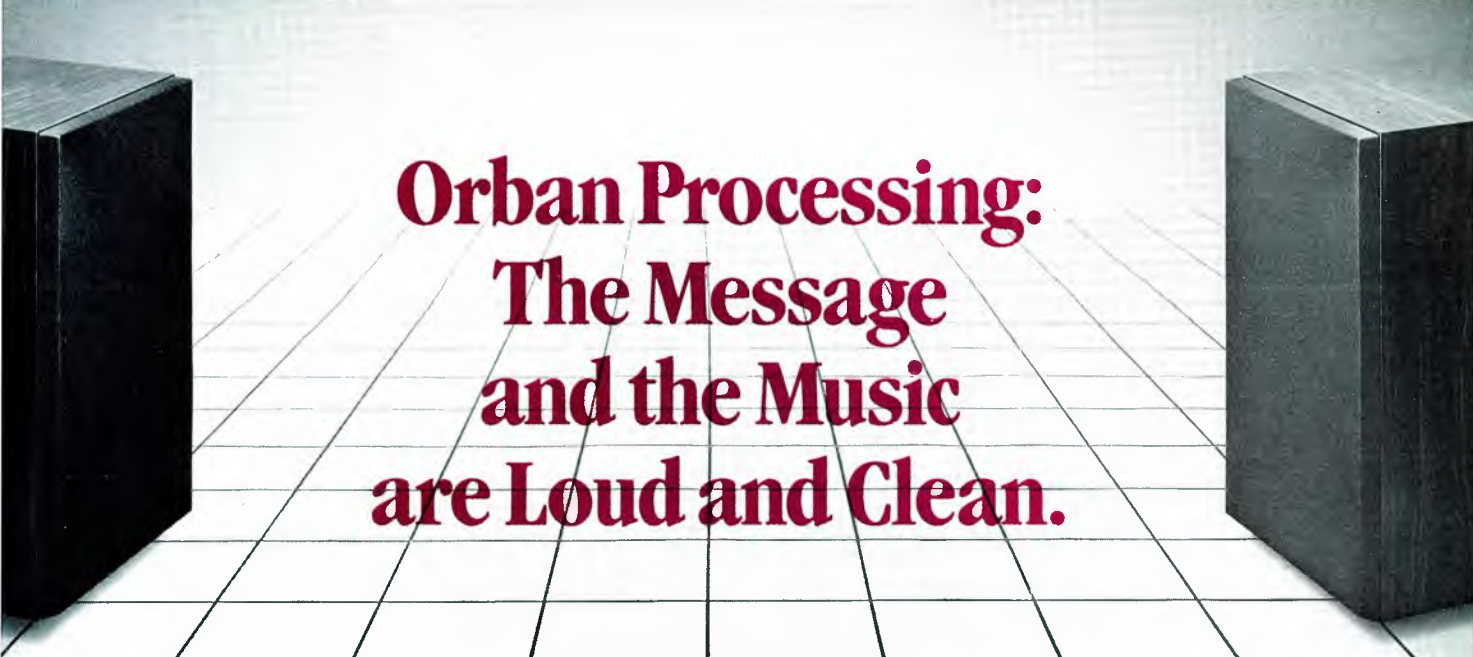

Orban Processing: The Message and the Music are Loud and Clean.

FM Radio (VHF)

OPTIMOD-FM 8100A/1 On-Air Audio Processor: The dominant choice for highest quality FM audio processing.

8100A/XT2 Six-Band Limiter Accessory to OPTIMOD-FM: Adds more competitive loudness, punch, and brightness.

222A Stereo Spatial Enhancer: Gives your station a competitive *leading edge* sound by naturally magnifying the stereo spatial image.

787A Programmable Mic Processor: A multi-function system for DJ mic processing that stores and recalls the optimum setting for each announcer.

AM Radio (MW and HF)

OPTIMOD-AM 9100B On-Air Audio Processor: Achieves extraordinarily natural audio quality on both voice and music, with loudness, intelligibility, remarkable source-to-source consistency, and FM-like brightness. Mono or stereo.

OPTIMOD-HF 9105A Shortwave Audio Processor: Louder than OPTIMOD-AM, punches through noise, fading, and jamming with outstanding intelligibility.

464A Co-Operator (for stereo) or **422A Compressor/Limiter** (for mono): Transparent studio level control to protect your STL microwave or telephone/post line.

Television

OPTIMOD-TV 8182A On-Air Audio Processor: For both stereo and mono television. Controls levels from any source artfully and automatically without audible processing artifacts.

OPTIMOD TV Stereo Generator 8185A: BTSC stereo generator (for NTSC countries) meeting the highest specifications. Also available — mating SAP and Pro Channel generators.

275A Automatic Stereo Synthesizer: Automatic recognition of mono and stereo, dramatic stereo synthesis, automatic polarity detection and correction, and single-ended noise reduction.

The Production Studio

245F Stereo Synthesizer: Converts mono commercials and old recordings into compelling pseudo-stereo.

412A/414A/422A/424A/464A

Compressor/Limiters: Smooth, transparent level control for all your production requirements.

536A De-Esser: Subtle yet effective de-essing to remove harsh, abrasive sibilance from voice.

642B/672A/674A Parametric Equalizers: Corrective and creative EQ for fine tuning commercial, phone line, transfer, and remote audio.



orban

a division of AKG Acoustics, Inc.

645 Bryant Street, San Francisco, CA 94107 USA

Telex 17-1480 FAX (415) 957-1070

Telephone (415) 957-1067 or (800) 227-4498

European representatives: Belgium: Trans European Music N.V., (32) 2/466-5010; Finland: Studiotec KY, (358) 0/592055; France: 3M France, (33) 1/3031-6423; Holland: Cadac Holland, (31) 35/17722; Greece: Bon Studio S.A., (30) 1/3602-942; Italy: Audio International SRL, (39) 2 253-90121; Norway: Benum Siv. Ing. A/S, (+7) 2/145460; Portugal: Amperel Electronica Industrial Ltda., (351) 1/52-7184; Spain: Singleton Productions, (34) 3 237-7060; Sweden: Tal & Ton AB (46) 31/803620; Switzerland: Audio Bauer AG, (41) 1/432-3230; West Germany: BCI Broadcasting Consulting International, (49) 911/5000-35, Amptown Electroacoustic GmbH (PRO only), (49) 40/646-0040; United Kingdom: Scenic Sounds Equipment Marketing Ltd., (+44) 1/387-1262; Eastern Europe: Denis Tyler Ltd., (44) 2/406-6262. **Asian representatives:** China: TFI Inc. (BDCST only), (1) 408 727-7272, Studer Revox (Far East) Ltd. (PRO only), (852) 5/412050; Indonesia: P T Prindu Audio-Visual Equipment, (62) 21/649-2349; Japan: Otartec Corporation, (81) 3 332-3211; Korea: Young Nak So Ri Sa Co., (82) 2/267-9697; Philippines: Adtronics Inc., (63) 2/673-2060; Singapore, Malaysia, Brunei: Crow Broadcast Equipment (pte) Ltd., (65) 259-9216; Taiwan: Mackari & Co. (BDCST only), (886) 2/506-5325, Linfair Engineering & Trading Ltd. (PRO only), (886) 2/321-4454; Thailand: Vichien Pathana Ltd., (66) 2/236-0137; Turkey: TER Omer Trade & Representation, (90) 4 138-0296. **Africa and Middle East representatives:** Nigeria: David Hughes & Co. Ltd., (23) 4/196-1701; South Africa: Pro Sound (Pty.) Ltd., (27) 11 337-6556. **Pacific representatives:** Australia: Syntec International Pty. Ltd., (61) 2/406-4700; New Zealand: Qisacorp Communications Ltd., (64) 9 444-6085.

Circle (11) on Reply Card

www.americanradiohistory.com

CD troubleshooting

By Brad Dick,
radio technical editor

Last month, we looked at several types of manufacturing defects that affect CD playback. Now let's examine how CDs may be damaged by users.

The cross section of a compact disc is shown in Figure 1. The transparent substrate (polycarbonate) forms most of the disc's 1.2mm thickness. Data is contained in the pits impressed in the top surface. The pit surface is coated with a 50nm-100nm-thick coating of metal, such as aluminum, silver or gold. Another acrylic layer 30µm thick protects the data layer. A disc label is printed on the protective surface.

User-caused damage

Two types of surface damage may affect a CD. The first occurs when the top acrylic is depressed into the aluminum coating. Because this protective coating is only 30µm thick, any depression on the acrylic-

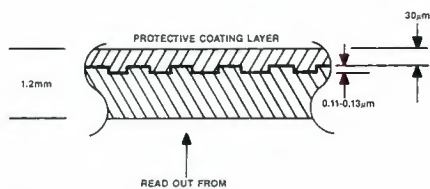


Figure 1. Cross section of CD showing the relatively thin upper coating. This layer can be depressed into the aluminum data area easily by pressing with a ball-point pen or sharp object.

ic layer can distort the metal (data) layer below. Even writing on the label side with a ball-point pen can destroy the data.

The solvents from some permanent marker pens also have been known to penetrate the acrylic coating, exposing the aluminum to air. If this happens, relatively large portions of the aluminum coating (data) may be distorted, and repair is impossible.

The second major type of disc damage occurs as scratches to the playing side (bottom) of the CD. Although the polycarbonate used to make a CD appears rugged, even minute scratches can cause

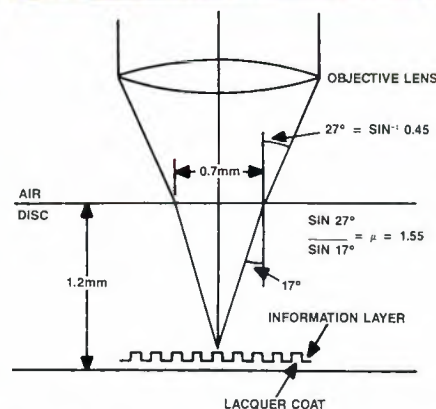
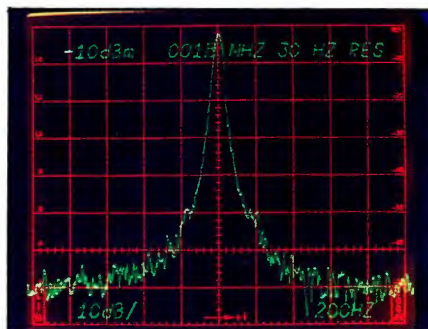


Figure 2. The CD polycarbonate acts as a lens to focus the laser beam from 0.7mm down to 1.2µm at the disc's surface. The relatively large spot on the surface helps reduce the effect of the pickup to dirt and other surface defects.

problems with playback.

Figure 2 shows the normal laser path to the reflective coating on the disc. The objective lens of the CD laser pickup assembly has a numerical aperture (NA) of 0.45. This causes the beam to be inclined at a 27° angle to vertical. Refraction at the air/disc interface changes this angle to 17°. Once the beam hits the reflective surface, it has been reduced from 0.7mm to 1.2µm in size.

Physics of scratches

A scratch in the polycarbonate substrate does not affect the aluminum coating. However, it does affect both the shape and position of the laser beam on the disc and its return path.

Figure 3 illustrates what happens as the laser beam passes through a deep scratch. The refraction that occurs as the beam enters the polycarbonate remains relatively constant at 17°, but the difference is that the disc surface is no longer parallel to the data surface. This new angle causes the laser beam to shift its position on the data surface. Instead of reading track C, the laser may shift to track A, which produces the familiar skip or jump. The amount of skip depends upon how much the laser beam deflects from the correct angle.

The process repeats as the beam traverses up the outgoing side of the scratch. As the pickup moves up the right sidewall, it thinks it is on track D when it is actually reading track G. The scratch also may change the spot shape and beam intensity through diffraction. If the spot is elongated enough to illuminate more than one track, recovery of the audio may be impossible. The player will either mute or output noise.

Acknowledgment: Appreciation is expressed to Laura Tyson, sales engineer, Denon America; Martin Ledford, quality control manager, Denon Digital Industries; and Dave C. Bowman, director of professional products, Studer Revox, for their help with this column.

1:7(=)))


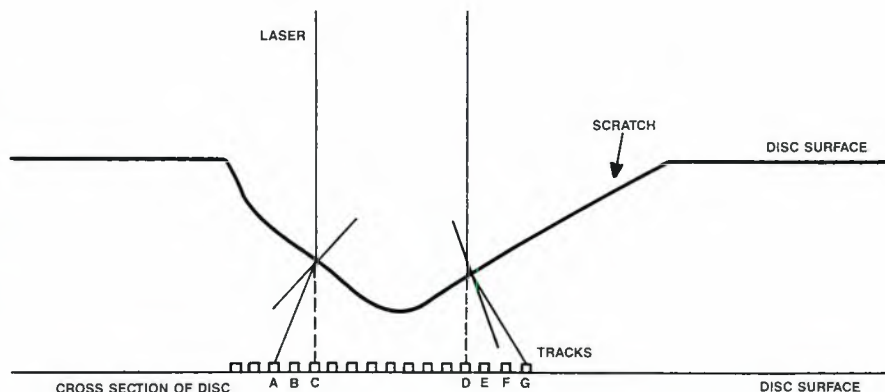


Figure 3. A scratch located tangentially to the tracks alters the laser's intended focus point to some other area on the disc surface. Disc refraction, combined with the tilt of the disc surface, places the beam at locations A and G. The pickup expects the beam to be at locations C and D.

“Incredible...A component MII recorder with built-in A/B roll editing at 3/4 inch prices.”

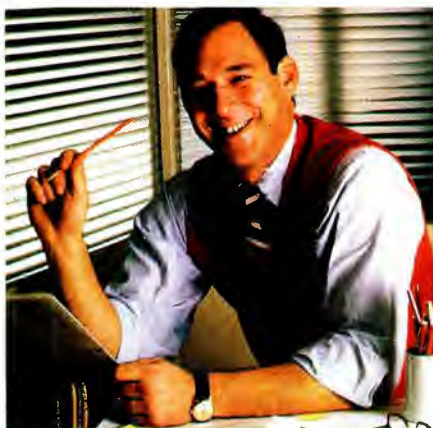

“To stay competitive in the market you need certain basics. It's essential to have A/B roll editing, equipment compatibility and component picture quality. And with a limited budget it seems impossible.”

Discover JVC's KR-M820U Editing Recorder.

The KR-M820U is the FIRST and ONLY MII component recorder with a built-in A/B roll editing controller operable from it's front panel. This versatile recorder incorporates CTCM, component, composite, Y/C 358 inputs/outputs and serves as the perfect hub in a complete component or multi-format editing system. It offers both serial data and parallel control and has two channels of FM audio as well as two channels of linear audio with Dolby C noise reduction.

Other key features incorporated in this truly unique editing recorder are:

on screen display to show editing status and VTR diagnostics, an optional integral SMPTE LTC time code reader/generator, 90 minute record/playback, plus much more.

For further information call 1-800-JVC-5825 or write JVC PROFESSIONAL PRODUCTS COMPANY, 41 Slater Drive, Elmwood Park, NJ 07407.

JVC
PROFESSIONAL



Circle (12) on Reply Card

www.americanradiohistory.com

Audio-video control systems

As engineers dream up new ways of generating, recording and modifying video, test equipment manufacturers must keep pace with the required test signals. Shown is a computer-based video test-signal generator. (Courtesy of Magni Systems.)



Prescription for a healthy station? PCs and a high-fiber diet.

A station engineer, who at the time was busily engaged in the construction and relocation of a major TV and radio facility, was asked by management, "Is our new station done yet?" The engineer felt puzzled. On the floors around him were hundreds of thousands of dollars of state-of-the-art electronics, hundreds of miles of cabling and many rooms filled with test equipment, microwave gear, telephone systems, back-up power equipment, shops and archives. Back on the engineer's desk was a clipboard listing equipment due to arrive soon, and also items for the following year's capital budget. Considering this, the engineer felt compelled to respond that it was inappropriate to speak of the maze of interconnecting systems that made up the station as ever being "done," rather, the questioner might better inquire as to the new station's "health."

If information and entertainment are a station's lifeblood, and video and audio signals are the station's pulse, then the control systems that keep it all working together are the central nervous system. The key to an efficient operation is to make sure that all of the systems within a given plant work together and talk to each other. No one is better equipped to ensure this than the engineers who live with a station, who most likely built it, and who are in tune with it, over time developing a sixth sense about the conditions prevailing in the plant's electric arteries.

This month our coverage focuses on the audio-video control systems that govern a station's bodily functions. To start with, we will examine developments that may lead to an all-optical fiber-optic switcher. As fiber optics quickly become a tool for today, we need to be efficient in getting the signals where they have to go.

In the fast-paced world of today's broadcast engineer, computers are rapidly becoming important tools. In many cases, engineers see PCs as their electronic assistants. This month, we examine how to put the PC to work for your station.


- "Switching Fiber-Optic Signals"26
- "Writing Applications Programs for a PC"42

As technology surges forward, it is vital that we keep our fingers squarely on the pulse of this industry. This month, as always, we strive to present useful information that will help you keep your facility healthy and fit.



Rick Lehtinen,
issue editor

**TO DEVELOP THE BVW-300, WE
HAD TO SATISFY SOME PRETTY
DEMANDING FIGURES.**

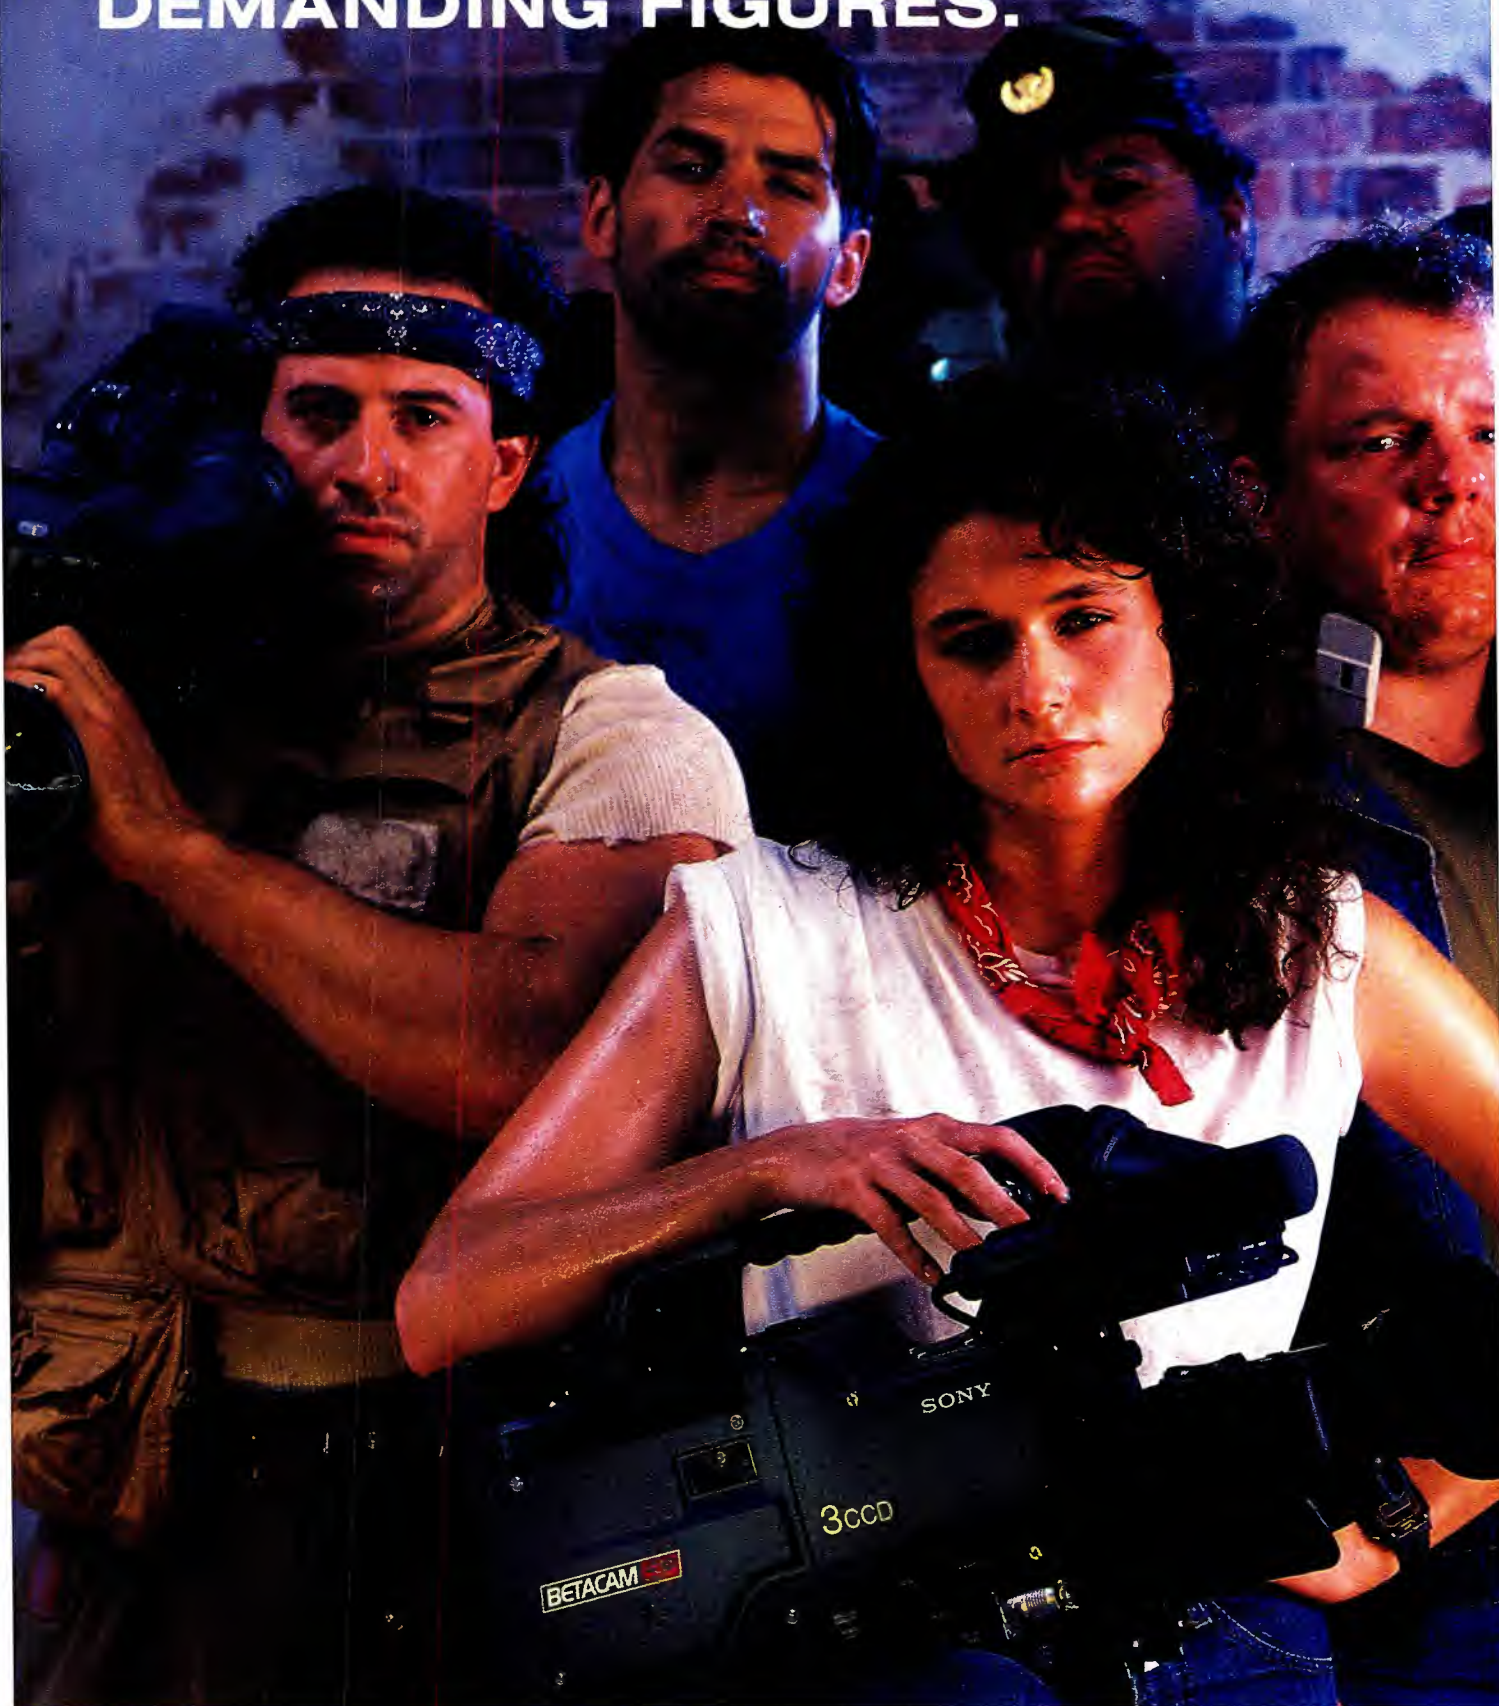



The people behind the lens. The most demanding figures of all. They asked for an innovative one-piece camcorder. And SONY delivered.

The BVW-300. The Betacam® camcorder designed with input from the professionals who'll be using it. Which means the BVW-300 meets some other pretty demanding figures, too.

Like high resolution and a high S/N ratio. Plus full Genlock capability.

Features that make the BVW-300 the first one-piece EFP camcorder. One totally at home on a multi-camera shoot.

The BVW-300 is the latest addition to the one-piece SONY camcorder family started by the BVW-200. Both are easy to use and have the same lightweight, compact design.

The BVW-300. Built to satisfy demanding professionals by an equally demanding company. SONY.

To find out more, call 800-635-SONY.

Sony Communications Products Company, 1600 Queen Anne Road, Teaneck, NJ 07666. © 1989 Sony Corporation of America. Sony and Betacam are trademarks of Sony.

SONY®

BROADCAST PRODUCTS

Switching fiber-optic signals

By Rick Lehtinen, TV technical editor

Fiber-optic routing switches direct light.

Most agree that fiber-optic cables are a good way to get a signal from point A to point B. Fiber doesn't roll off at high frequencies. It is impervious to RF interference and electromagnetic noise. Because fiber doesn't conduct, it doesn't have hum problems. About the only thing wrong with fiber is that it makes it difficult to switch signals — you generally have to go from light to electricity and back. But this won't be the case for long. This article explores advances in the rapidly growing field of fiber-optic technology.

Fiber's best where it's best

Because of the cost of getting a signal into and out of the "photon format," broadcasters today most often use fiber on long runs, on runs through areas where metallic cables would be susceptible to picking up noise, or in situations in which the bandwidth of the signal to be transmitted is greater than coaxial cable can handle well. In the equipment core of a well-engineered facility, where the wiring is electrically quiet and the cable runs are short, fiber optics probably wouldn't bring much benefit. In an era of high-definition (hence high-bandwidth) signals and digital

VTRs, this situation could change quickly. Fiber-optic switching equipment is likely to increase in importance to broadcasters.

Advanced connectors

Actually, several methods can be used to switch a fiber today. The simplest is with two connectors and a barrel. (See Figure 1.) Advanced ceramics, keyed receptacles and ultratight precision lead to low insertion losses, usually less than 0.5dB for a mated pair. Furthermore, modern connectors can be hand-assembled in the field in minutes, not the hours it once may have taken. Of course, it is not a far step from connectors and barrels to using bulkhead mounted barrels to form a patch panel.

Splicing technology has come a long way, too. In addition to the tried-and-true fusion splice, which "arc welds" fibers together, a host of reliable, low-loss mechanical splices is available.

The trees and the stars above

An esoteric form of connection is the fiber-optic coupler. It is at the heart of many of the more advanced switchers. In a coupler, two or more fibers are fused carefully, then tapered and drawn. (See Figure 2.) When the light hits the taper, some of it leaves the fiber core and enters the fiber cladding. As the taper continues, the light eventually overlaps and re-enters the cores. The tapering process is discontinued when the desired amount of coupling is achieved, and the fibers are broken out individually once more. From two to 100 fibers can be coupled this way.

In a perfect coupler, whatever light goes in the input gets divided equally among the output legs, with no losses. In reality, there are some losses, but they can be held to about 0.5dB with good design. In a "star" coupler, the light on any input fiber is divided among all the output fibers. A "tree" coupler resembles a star, except



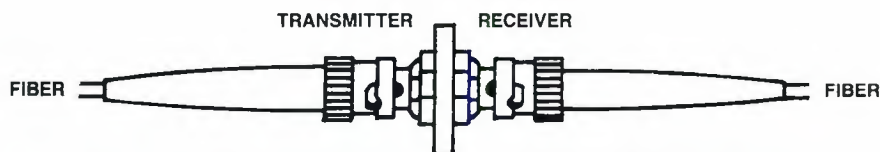


Figure 1. Two modern fiber-optic connectors joined in a barrel. A patch panel is created by mounting several barrels in a bulkhead panel.

Acknowledgment: The author wishes to express his appreciation to Kenneth Regnier, Comlux, Mountain View, CA; David Polinsky, DiCon Fiberoptics, Berkeley, CA; Tony Diaz, Optivision, Palo Alto, CA; and Paul Kopera, Amphenol, Lisle, OH, for their assistance in the preparation of this article.



Just as no performer can stay on top without innovation, no company can retain its reputation for performance without product innovation. The standards we've set with our broadcast cables are a reflection of our commitment to product innovation - something that continues today with Brilliance®.

Named for the sound and picture brilliance obtainable through product innovation and improved signal integrity, Brilliance products range from exciting audio/video cable assemblies to the four new cable products below:

Soft, flexible Microphone Cables.

The debut of Belden's four-conductor microphone cable

sets an industry standard. Featuring matte finish jackets in a wide range of colors, these new cables are designed to increase cable flexibility while enhancing performance.

High-Flex and CL 2 Rated Precision Video Cables.

To solve the problems of rack installations and CCTV systems, Belden has developed a

new 75 ohm precision video cable. High-Flex combines Belden® 8281 electrical performance with improved flexibility and longer flex life.

Audio Snake Cables.

Belden now offers a line of multi-pair snake cables. Featuring individually jacketed and shielded pairs, Belden snake cable provides maximum pro-

tection against signal loss. Features include loose tube construction and a non-reflecting black matte finish.

Audio and Video Composite Cables.

For systems combining audio and video, Belden has specifically designed cables for ENG and camera applications. They combine off-the-shelf availability with specialty design center technology and fiber/copper composition.

Call your local Belden distributor for our Broadcast Catalog, or contact us directly: Belden Wire and Cable P.O. Box 1980 Richmond, IN 47375

1-800-BELDEN-4
(in Indiana, call 317-983-5200)

BELDEN BRINGS THE LIGHT OF INNOVATION TO BROADCAST CABLE

There is no equal.™



BELDEN

Copyright © 1989 Cooper Industries, Inc.

Circle (14) on Reply Card

www.americanradiohistory.com

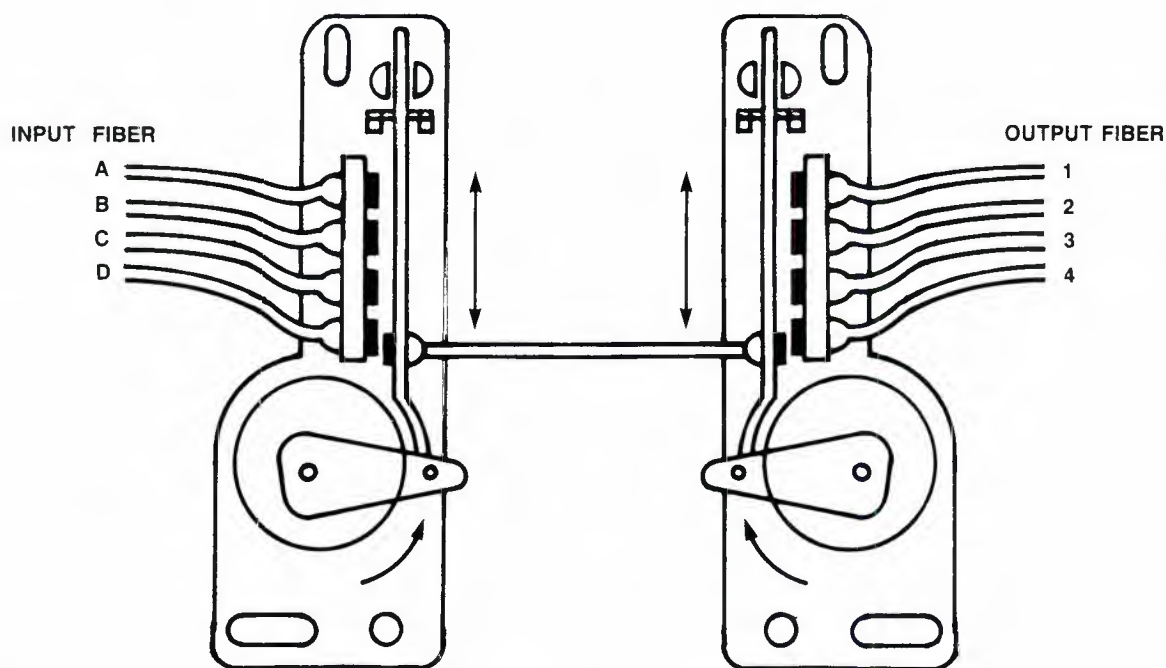


Figure 5. Combining optical switches allows any one input fiber to connect to any one output fiber. This configuration, although feasible, wastes fiber capability because it "blocks" the unselected fibers and doesn't allow an input to be distributed to more than one output at a time.

Continued on page 36

LARCAN

**"The design
allows us
to operate
without a
backup."**



"The redundant design of the LARCAN transmitter allows us to operate without a backup unit. Failure of one or two modules would not take the transmitter off the air—in fact, they can be replaced while the transmitter is running."

**Tom L. Bracanovich, VP Eng.
Malrite Communications**

What makes so many CEs so confident about their 100% solid state M Series VHF transmitters? Why are more stations choosing LARCAN's proven third generation engineering every month? Find out—and put *your* station on the pathway to LARCAN M Series performance. Just call the RF experts of LDL Communications at (301) 498-2200. We'll send you full information on the many reasons why LARCAN M Series 100% solid state VHF transmitters from 3 to 60 kW are "your best choice for the long run."

LDL Communications Inc.

14440 Cherry Lane Court, Ste. 201, Laurel MD 20707
Tel: (301) 498-2200 Fax: (301) 498-7952 Tlx: 821569

SEE US AT SBE BOOTH #528, 629

Circle (18) on Reply Card

ABEKAS



SIX YEAR OLD JUGGLER BECOMES TV HIT.

Juggling over 1,000 images is tough. But the Abekas A42 Digital Still Store makes it easy. In fact, for six years running, leading TV stations have made the A42 their chosen method of image storage. It's a big hit. And for good reason. The A42's on-line hard disk provides safe, cost effective storage of up to 1050 frames/2100 fields. For off-line storage there's a digital streaming tape drive. You get excellent multi-generation capability. Single or dual output. A powerful optional library system. Digital video processing that assures clean, crisp high-quality images and D-2 composite digital compatibility. You want to juggle over a thousand images with ease? The Abekas A42 is the standard. For details: **(415) 369-5111**

Abekas

A Carlton Company

Leading in Digital Innovation

Atlanta (404) 451-0637 Chicago (312) 699-9400
Dallas (214) 385-4544 Los Angeles (818) 954-8700
New York (516) 829-0820 San Francisco (415) 369-6791

Circle (19) on Reply Card

More and more people are lining up for the Panasonic SVHS Pro Series.

One look is all it takes. And you'll see why more and more people are lining up for the Panasonic® SVHS Pro Series. Because anyone in the market for a high-quality professional video production system, simply can't afford not to look at what the Pro Series can do for them.

Take Cost-Performance. The Panasonic SVHS Pro Series delivers both. By combining the efficiency and systems flexibility of half-inch technology with the exceptional performance of Y/C component signal processing.

The result. A comprehensive video production system that provides two hours of operation on a single cassette. With over 400 lines of horizontal resolution. And signal integrity through five generations.

By now it should be obvious. The closer you look and the more you compare the Pro Series to historical video formats, the sooner you'll line up for the Pro Series.

As a Panasonic SVHS Pro Series user, you'll have direct access to Panasonic's nationwide network of engineering, service and technical support specialists. And with over 300 professionally trained dealers, many of whom are self servicing, you'll always get the most out of your Pro Series equipment.

Finally, a professional video format more and more people are lining up for. The Panasonic SVHS Pro Series.

For more information and your local dealer, call your nearest regional office.

Eastern Zone: (201) 348-7620 • Central Zone: (312) 981-4826


Southern Zone:

Dallas Region: (817) 685-1122 • Atlanta Region: (404) 925-6837

Western Zone:

Seattle Region: (206) 285-8883 • Los Angeles Region: (714) 373-7275



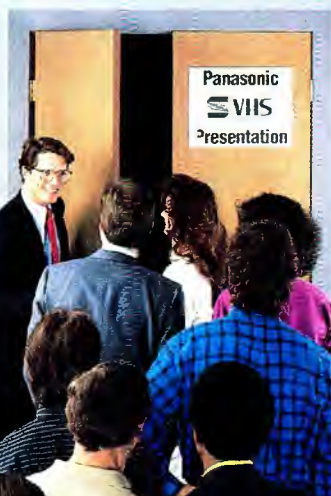

To assure excellent quality, support, service and professionalism, the Panasonic Pro Series is available through authorized dealers.

Panasonic
Professional/Industrial Video

Circle (20) on Reply Card

Continued from page 32

treat a light beam differently depending on its strength. This means that optical devices could be self-switching. One such device, demonstrated recently by Bellcore, looks like little more than the fused portion of a 2-port star coupler. However, the little device has the ability to switch an input signal to one of two output ports based on the incoming signal's strength. Such devices could greatly simplify the design of future fiber-optic routing switchers.

Another new idea is that of the "soliton," a short burst of light. Currently, all fiber-optic systems have dispersion problems, which cause the pulses of light to spread out and eventually muddle together. The soliton, however, is so short it doesn't disperse. This "fundamental bit" of a light impulse could be the basis of future optical computers that think with light pulses, instead of electrons in silicon.

The limitless potential of light

There was a time when radio pioneers reflected on the vast range of frequencies "beyond 50MHz" and dreamed of the communications potential to be found there. Lightwave communicators have similar visions.

Just as certain microwave bands cut through rain and clouds better than others, certain light frequencies go through an optical fiber better than others. Common transmission "windows" are 1,500nm, 1,300nm, 1,050nm and 800nm. Each of these windows could be considered a frequency band, just as 2GHz and 6GHz are considered microwave frequency bands. Within each band there can exist many operating frequencies. There is nothing wrong with operating a fiber on several frequencies at once. One manufacturer offers a digital fiber-optic system that optically multiplexes four channels, spaced 30nm

apart, into a single fiber operating at 800nm.

There also is nothing wrong with operating on more than one band at a time, such as 1,300nm and 1,500nm. Such wavelength division multiplexing (WDM) can effectively double the capacity of many fiber systems.

In the laboratories, however, research is focusing not merely on using many channels in a band, but also on locking down discrete "colors," or frequencies. Called a "coherent" system, this could increase the amount of traffic per band at least tenfold. And whatever capacity is achieved, it probably still could be doubled through WDM. But this is just the beginning.

It's about time

Gallium arsenide semiconductors have pushed up the speed limits on fiber. At this year's NAB, a manufacturer of a popular

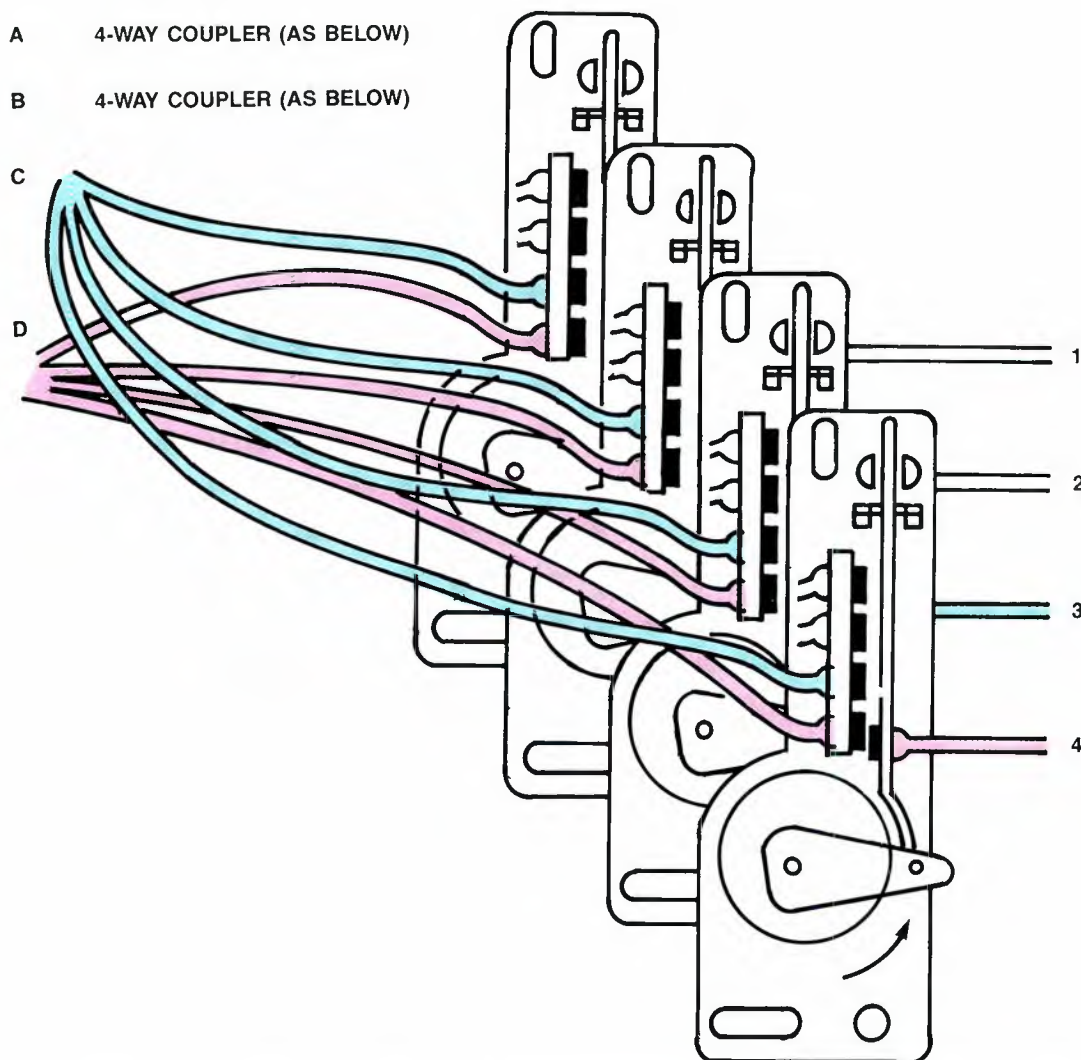


Figure 6. A non-blocking fiber-optic switch that allows each input to go to one or several outputs. This type of matrix is available commercially.

Panasonic® Pro Series Monitors.



**Designed for production quality...
With an eye on your budget.**



Panasonic presents two very versatile, high-grade color monitors--the BT-D1910Y and the BT-M1310Y. Built for performance, these BT-Series monitors offer you the quality and reliability you've come to expect from Panasonic. Not to mention a wide array of features at an affordable price.

Our BT-Series provides you with the controls and connections necessary for studio applications--while serving a host of industrial, educational and professional video needs.

For maximum performance and versatility, both monitors offer complete, direct compatibility with the new S-VHS format--in addition to conventional signals. And video reproduction on the BT-Series is superb. As a matter of fact, the BT-M1310Y boasts a horizontal resolution of more than 560 lines, while the BT-D1910Y offers you greater than 550 lines.

What's more, each monitor provides you with a full set of front panel controls. Like Line A/B split, S-Video input

connectors, Blue signal-only switch, pulse-cross circuit, preset picture off/on, comb/trap filter selectable and normal/underscan switch, just to name a few.

So when you are looking for professional quality, but still need to keep an eye on your budget, look into the Panasonic BT-Series high-grade monitors.

For more information and your local dealer, call your nearest regional office.

Eastern Zone: (201) 348-7620 Central Zone: (312) 981-4826

Southern Zone:

Dallas Region: (817) 685-1122 Atlanta Region: (404) 925-6837

Western Zone:

Seattle Region: (206) 285-8883 Los Angeles Region: (714) 373-7275

Panasonic
Professional/Industrial Video

Circle (21) on Reply Card

www.americanradiohistory.com

140Mb/s digital fiber system introduced a 560Mb/s system. They achieved this by using a GaAs high-speed time division multiplexer (TDM) to sample four 140Mb/s

video channels onto a single fiber-optic transmitter operating at 560Mb/s.

Already, advanced researchers are working with systems that can move data in the teens of gigabits per second. At these rates, researchers claim, the entire Encyclopaedia Britannica could be transmitted in well under a second. These speeds are much faster than the hardware available to drive them. Several laser transmitters have to be locked together and fired sequentially, gattling gun fashion. And even these incredible data rates can be multiplied using multiple frequencies per window and multiple windows simultaneously.

cle might not be necessary. It probably could be replaced by a light-speed bus, with signals entering and exiting via multiplexers. Second, the capacity and production horsepower afforded by fiber optics is likely to outgrow our ability to deliver it over a single 6MHz-frequency channel. We are likely to see significant changes in the transmission side of television. For better or worse, like it or not, fiber optics will inevitably, irrevocably change the way we do business.

Courtesy of Bell Communications Research



Through non-linear optics techniques, this small piece of fiber can self-switch an input to one of two output paths, based on the power of the input pulse.

Will TV ever be the same?

Just as the capacity of fiber optics is expanding, researchers are working hard to shrink television's bandwidth requirements. To this end, they have come up with compression schemes, multiplexing systems, even proposals to get away from the real-time scanning basis of television, all with the intent of packing more television into a smaller spectrum.

What do these trends mean to telecasters? Two things. In the first place, by the time it is available, the routing switcher discussed at the beginning of this arti-

1:~(-))||

Betacam® With Triax Control

Live broadcasting with ENG cameras began with Telemetrics control systems.

Controls • Video • Audio • Genlock • Power
Telemetrics—for over 20 years the innovators of camera control multiplexing systems.



Telemetrics Inc.

7 Valley St. Hawthorne, N.J. 07506
For Information Call (201) 423-0347

*Ask for info on Pan/Tilt Systems.


© 1988 Telemetrics Inc. Betacam is a registered trademark of Sony Corporation

Circle (22) on Reply Card

WE'RE RELIABLE. YOU'VE GOT THEIR WORD ON IT.

...transmitter has stood the test of time (nearly 9 years). We're very satisfied with its reliability."

Joe Alvin, Chief Engineer
WNNE-TV
White River Junction, VT

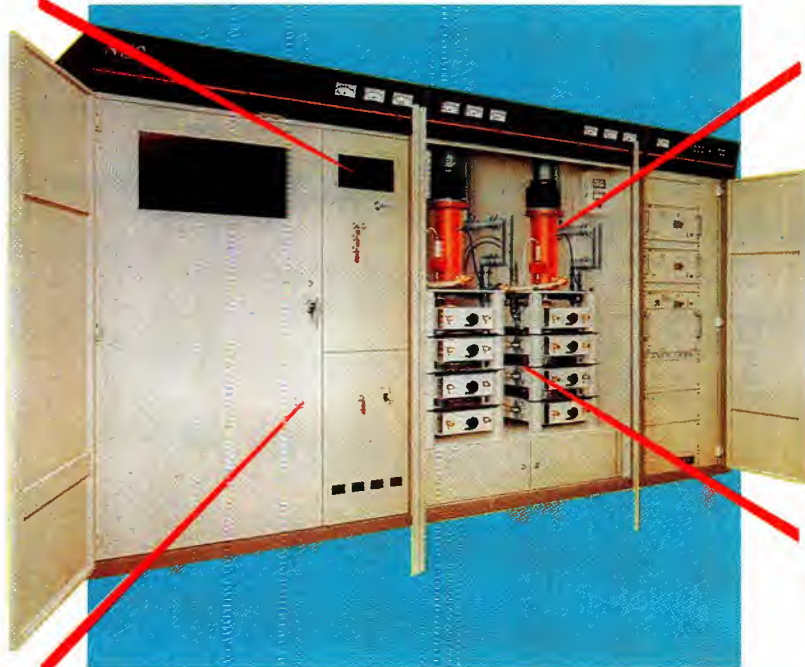

"NEC has bent over backwards to help us with any questions about the transmitter. We've had a wonderful association with them. We're very impressed with NEC quality."

Karl E. Paulsen, Chief Engineer
KTZZ-TV
Seattle, WA

"We were impressed with its 'turn key' performance. It's easy to operate and doesn't require any 'tender loving care.' It's reliable."

Bob Hollinger, Assistant Chief Engineer
WQEX-TV
Pittsburgh, PA

...their technical support is always reliable. You can just call Chicago and get the information you need. ...the transmitter's good. We're very satisfied with its performance."

Phil DeLorme, Dir. of Engineering
WTKK-TV
Manassas, VA

If you want a clear picture of just how good an NEC UHF transmitter is, take a look at what people who use them are saying. They're talking about reliability. Stability. Excellence in design. Low cost operation. And there's no comparison when it comes to maintenance. They require very little attention.

They're also saying that NEC people are always there when needed. With suggestions. Ideas. Answers to questions. Replacement parts. Or whatever it takes to keep a transmitter running smoothly.

What they're telling us is what we'd like to tell you. If you need a transmitter that's built to be reliable year after year, that's known for stability, and that's not power hungry, take a look at what NEC is offering. Better yet, take a user's word for it.

Here's why there's no comparison:

- 100% solid state construction

- Highly efficient Amperex, EEV, or Thorn EMI klystrons
- Power ranges from 10 kW to 240 kW (parallel running)
- 30% reduction in exciter parts for 50% increase in MTBF (to 30,000 hours)
- Diagnostics throughout transmitter
- Water or vapor-cooled — as you choose

- External (oil) or dry, internal power supply — as you choose
- ATS ready
- Ready for stereo without modification
- Ion pump to increase klystron life

Emergency parts are available 24 hours a day, 365 days a year. Simply call 1-800-323-6656.



PCN-1400 Series VHF Transmitters also available. Power sizes 1 kW to 100 kW (parallel running).

For more information about NEC transmitters, contact NEC America, Inc., Broadcast Equipment Division, 383 Omni Drive, Richardson, TX 75080-3545. Or, call 214-907-4710. Fax 214-907-4711.

NEC

Circle (23) on Reply Card

THE TV SERIES YOU'LL BE WAITING FOR



There's more digital from the master.

Sony now brings you two new D-2 recorders, the full-featured DVR-18 and a new portable unit, to stand alongside the familiar DVR-10.


The DVR-18 can record continuously for three hours. And its unique "fast formatting" approach to pre-stripping cuts the preparation time for insert editing by two-thirds.

The DVR-18 has two plug-

in options: one for serial digital signal transmission, one for time compression with built-in digital pitch-corrected audio.

Plus all the advantages of digital recording. Such as 20 or more generations of transparent

CHING FOR YEARS TO COME.

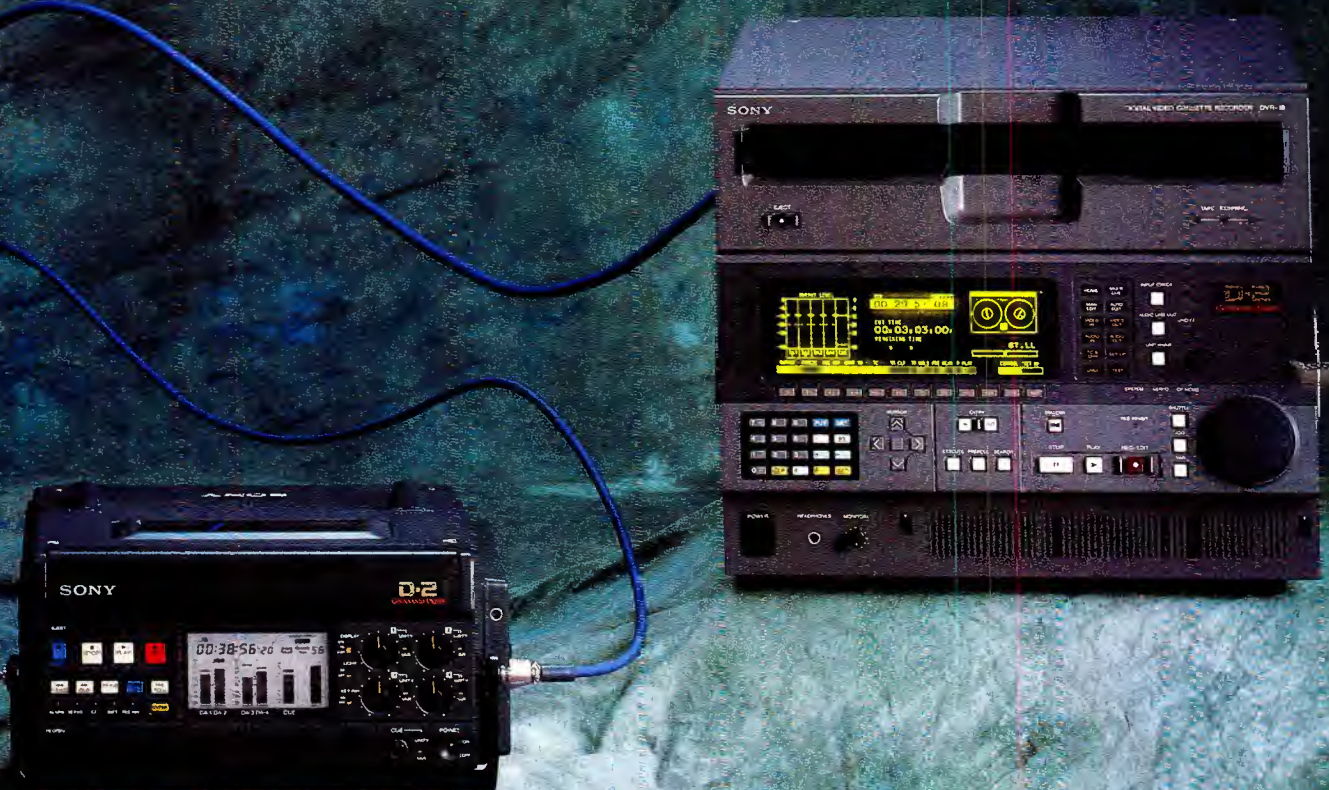

digital dubbing. Four channels of PCM digital audio. And write-after-read editing.

Sony's new portable DVR-2 can record up to 94 minutes, with full error correction and concealment in playback.

Each of these recorders is taking its place in a growing Sony D-2 family, destined to be

the workhorse for "on-air" editing and field production work.

To find out more, contact your Sony Broadcast Sales Engineer. Or call (800) 635-SONY.

SONY®

BROADCAST PRODUCTS

Sony Communications Products Company, 1600 Queen Anne Road, Teaneck, NJ 07666. © 1989 Sony Corporation of America. Sony is a registered trademark of Sony.

Writing applications programs for a PC

By Ronald Balonis

Custom programs may be the BASIC answer to engineering problems.

Today's personal computer is the result of years of hardware and software technology. It's easy to use; you just tell it what to do. The key is to instruct the computer in a language it understands. Often, that instruction process requires that you create a custom program. At first, the process may seem difficult and complex, but once you're armed with some basic procedures (no pun intended), you'll find it isn't so formidable.

Electronic assistant

In the fast-paced world of today's broadcast engineer, computers are rapidly becoming important tools. In many cases, engineers see PCs as their electronic assistants. With a PC, obscure and esoteric technical minutia can be organized efficiently. Tasks ranging from word processing to complex and tedious mathematical calculations can be handled quickly and accurately. Today's PC provides expertise for the broadcast engineer.

Contrary to what some think, the real power of a computer is not in the hardware, but in its programs (software). This is the value of computer programming. A computer is not merely a mysterious machine or a fascinating toy. It is a tool that, through software, brings great power to

the user.

Machine tools represent mechanical evolution. The computer represents cognitive evolution. The computer provides a way to store expertise in the form of applications programs.

Applications programs

An applications program is computer software that enables a computer to perform a task or solve a problem. It ultimately determines a PC's effectiveness, worth and utility.

Software falls into two general categories: pre-written and user-written. The first category includes a wide variety of products. These include word processing, electronic spreadsheets, database and utilities. The second type of program allows users to create custom applications. This may be necessary when your needs are not met by packaged programs.

There is a lot of application software from which to choose. It is relatively easy to find a program to perform such tasks as word processing, project management, graphics or database work. With these programs, all you have to do is load them and begin.

The second category of software is quite different. Once loaded, the program waits for instructions. It's up to you to use the program, much as you would a word proc-

essor, to tell the computer what to do. You must create a script or set of instructions for the computer to follow.

With a little expertise, you should be able to write your own programs. It's really not so different from writing operating instructions for equipment. If you're knowledgeable about application problems, you're halfway there. All you need to do is learn how to make the computer understand what you want. That's what computer programming is really about.

Programming

Programming is the process of creating step-by-step plans for a computer to follow. A program is a list of computer instructions telling the computer exactly what to do in solving a problem or performing a task.

Computer programming consists of three basic phases:


- Creating or finding an algorithm.
- Coding the algorithm into machine-ready code.
- Debugging and testing.

These steps must be completed and interactively used to develop any successful program.

Because of the sophisticated technology computers contain, programming is more similar to writing than to mathemat-

Balonis is chief engineer, WILK-AM, Wilkes-Barre, PA.

Where digital and analogue meet (to give you the best of both worlds.)

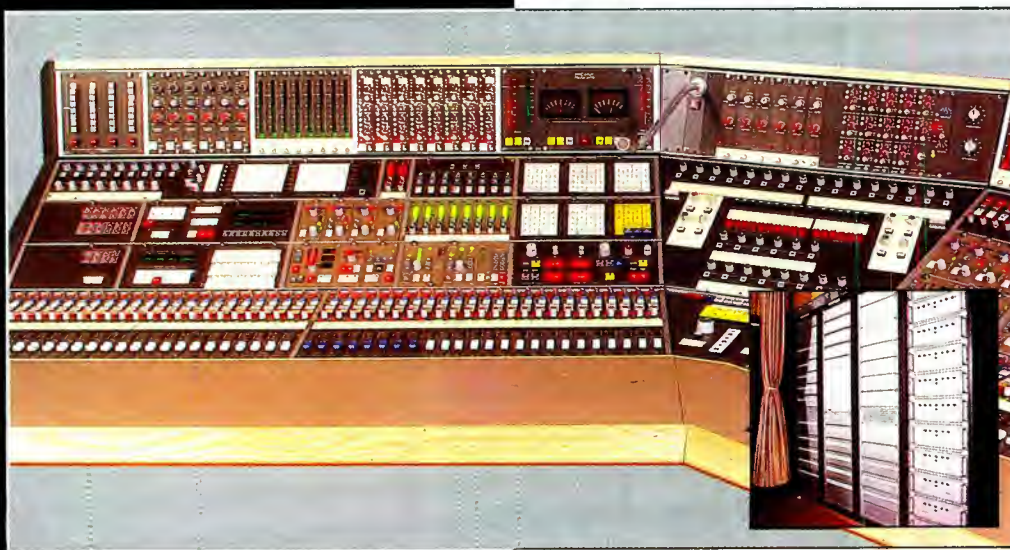

96 channel VCS at BBC TV Centre Studio 4

The AMS Virtual Console System

ams
AMS Industries plc

AMS, Billington Road, Burnley, Lancs. BB11 5ES.
Tel (0282) 57011. Telex 63108 AMS-G. Fax (0282) 39542.
AMS Inc., 3827 Stone Way North, Seattle, WA 98103 USA.
Tel (206) 633 1956 Fax (206) 547 6890



The Queen's Award for Export Achievement to Edendeck Ltd 1985 and
AMS Industries plc 1986. In July 1985 Edendeck Ltd became AMS Industries plc.

If your day starts with a wish that you had up to 128 different audio channels, instantly reconfigurable to provide different groups and outputs – each selectable for mono/stereo, microphone, line or tape input with a memory that can reset every function to what you were doing yesterday, or even last week; look no further.

Our comprehensive brochure explains the benefits of a digitally controlled analogue audio desk and details how to plan the layout of your own Virtual Console System. The VCS isn't just something on paper though – it is already offering reliable service to Thames Television (2 consoles) and the BBC (4 consoles), including a 112 channel desk working as the BBC Master Sound Control OB vehicle.

- Free assignment of faders for maximum flexibility.
- Ergonomic layout with high resolution displays/controls.
- Three RAM and multiple disc based memories.
- Instantaneous memory reset of all functions.
- 1 inch fader modules permit a large console to live in a small space.
- High performance, proven audio circuitry.
- Diagnostic self test for ease of servicing.
- Orders now being accepted for the Post Production version of the VCS with moving fader automation.

STOP PRESS... Systems currently under production for Channel 4 TV, NRK Oslo and BBC Colour Mobile Central Control Room... STOP PRESS



Music
Recording



Hard Disc
Editor



Digitally
Assignable



DMS/RMX
Digital Audio



Stereo and
Soundfield



Digital Mixing
Consoles

www.americanradiohistory.com

Circle (24) on Reply Card

ical computations. All programs must be planned and constructed carefully. Writing a program is a demanding task that doesn't allow you to assume anything. You must be explicit and avoid ambiguity, and you must write in a language the computer understands.

The process

Programming is more than just coding computer instructions; it is an algorithmic, problem-solving process. The first step in writing an applications program is to define the problem. Then you can begin to devise a solution. You must understand thoroughly what you want to do. You cannot ask the computer to know what you don't know. It has no built-in intelligence and no ability to reason. It only follows instructions.

Creating or finding algorithms is both art and science. It is an art because it requires some intuitive thinking. With time and practice, your proficiency improves. Programming also is a science because logical problem-solving methods are the tools you use to find and implement solutions.

You don't normally think of them this way, but algorithms are an integral part of the human thinking process. Much of

what you do seemingly without thinking relies on built-in algorithms that were created internally when you first learned to do something. The primary difference between human instructions and computer instructions is that computer instructions must be contained in steps and procedures that can be coded into a computer programming language. The goal is to find a solution using an algorithm that can be coded to be computer-readable.

Just as practice makes your writing better or your thinking clearer, it also improves programming. There is no one perfect recipe or algorithm. Try to create programs that are simple and concise. Complexity is the enemy of good programs. The extra features — the bells and whistles — often cause frustration during development and use.

Making the computer program

The next step in the process is coding the algorithm into a machine-readable form: a computer program. Coding the algorithm into high-level computer language makes it possible to write the list of instructions (the program) in terms that can be understood by both human and machine.

The high-level language used in this ex-

ample is BASIC (Beginner's All-Purpose Symbolic Instruction Code). Despite what some programmers say, BASIC has strong points for both the novice and the expert computer programmer.

- It is easily understandable.
- The commands and statements, presented in plain English, make it easy to learn and remember.
- The simple syntax is easy to type.
- Because it is interactive, coding and debugging is simplified.
- It is widely available for most computers.

Use the reference guide

To code computer programs proficiently, you must know the meaning and function of the BASIC program statements. Although it might be nice to know all the computer language instructions by heart, it's not absolutely necessary. If you don't know all the commands, or can't remember them, use the manual.

Refer to it as you would use a dictionary for any other language — to find out a statement's function, use and syntax. Most BASIC manuals provide examples so you can see how another programmer might use a function. Everyone uses the manual sometime, so don't be ashamed to keep it close by.

LOOK TO SIERRA FOR ROUTING SWITCHERS.

Now you can get broadcast quality
at an *affordable price*.

Sierra Video Systems' small and medium sized routers offer flexibility and high quality, at a reasonable cost. Features and benefits include:

- Mix video, audio, and pulse in one frame.
- RS-232 serial control for either an external computer or simple data terminal.
- Applications include many formats such as: component, composite, time code, sync, SVHS, etc.
- HDTV bandwidth.
- No custom or proprietary parts, for long term field support.
- Modular design permits easy expansion and serviceability.

All this plus a 7-year warranty!



SIERRA
VIDEO
SYSTEMS

Look to Sierra for the clear image.

P.O. Box 2462, Grass Valley, CA 95945 • 916-273-9331 • Fax: 916-273-9390

Circle (25) on Reply Card

What should you expect from the company that designed the first color video noise meter?

Clearly, everything.

Fifteen years ago, when we introduced the first color video noise meter there was a lot to make noise about. Today, with the advent of super tapes, super formats and CCD technology, measuring noise accurately has become an exacting science. Shibasoku's VN30A Series Color Video Noise Meters rise to the occasion with some improvements of significant note.

Little Windows.

New user defined measurement windows, easily constructed from the front panel, can be located anywhere on the screen. Create a spot window as small as a $4\mu\text{s}$ line segment and infinitely expand it up to full field. You can even place it in the vertical blanking interval.

Free Buss Rides.

Whether you've already automated testing, or plan to in the future, you get a GP-IB as standard equipment. That's right, standard. Not an expensive add-on afterthought.

And All The Extras.

The new VN30A Series gives you all the little extras like automatic sag compensation, auto level control and automatic memory for noise mode measurement. This means you can initiate a test quickly, in fact, at the touch of a single button. To help you isolate noise more precisely, the VN30A Series will let you measure even field, odd field or full field. And, the VN31AX will automatically select between NTSC and PAL.

To find out why, for price and performance, the VN30A Series is clearly the leading color video noise meter, contact us today.



Asaca/Shibasoku Corporation of America
12509 Beatrice Street, Los Angeles, CA 90066
(213) 827-7144 FAX (213) 306-1382

Programming style

As you write the program, it's important that you keep it readable. Good programmers usually write with a certain style (appearance). This simply makes the code easier to read and understand. Sections of the program often are grouped and indented together so that they resemble paragraphs. The liberal use of remark and comment lines helps to define the code's functions and important variable names.

There is no single best way to write a program. Problem-solving requires creativity, but the structured nature of computers requires that specific procedures and methods be used to develop the program.

A structured programming technique can help prevent this human vs. machine conflict. The structure allows a program to meet the needs of both the programmer and the computer. Using these easy-to-follow rules helps programmers organize their thoughts and results in an efficient program.

The program must be built according to a top-down hierarchical structure. It should be modular and divided into logical parts. All variables must be initialized at the beginning of the beginning. Variable names should be as obvious as possible. Don't select a variable name such as "Blue" if "Blue" is actually the transmitter output power. You may remember what "Blue"

means today, but you won't six months from now. Rely on standard abbreviations whenever possible. Modules must have only one entry and one exit point. Limit GO-TO statements to control structures, and limit the number of control structures (conditional, repetition or selection). Use comments, blank lines and blank spaces to document the program code. In short, keep it simple, and make it readable.

Debugging/testing

The last and most important step in developing an application program is debugging and testing it. No matter how elegant the algorithm, how clever the coding or how numerous the features, if the program doesn't work right, it's useless.

Debugging is the process of getting the program code to work right. Testing is the process of checking to verify that the program really does solve the problem or perform the task correctly.

Bugs are programming mistakes or errors. They come in two distinct varieties: logical ones related to the program's algorithm and syntax ones related to the coding of the algorithm. Both kinds of errors can show up as run-time errors. They may cause the program to crash or to display an error message. Subtle errors may produce incorrect operation or erroneous results.

Efficient debugging requires the use of problem-solving techniques to isolate the bugs one by one. The same general techniques used for troubleshooting electronic hardware are applicable for electronic software.

Once you've discovered a bug, look for the cause. Common causes are typographical and syntax coding errors, grammatical rule violations or the misuse of statements and functions. Errors in problem definition or analysis also can develop.

Two other mistakes frequently occur. One is that you may have defined the problem incorrectly. In other words, the computer may be correctly solving the problem you defined, but that may not be the problem you really wanted worked. The other type of mistake is caused by an error in data entry. Did you mean to input 6kW, or was it supposed to be 7kW?

Two common BASIC debugging techniques are *dump* and *trace*. They can be used to check program flow, subroutine functioning and the computed variables. Use direct commands to test statements. Use print statements to show the contents of variables. When you have a problem, print the troublesome section of the program on paper. It's often easier to spot errors when you see them on paper.

Insert trace statements in the program such as STOP, PRINT a variable, PAUSE (input x) or BEEP to isolate the program error. Make a bug list. You may find that similar errors are repeated in other parts of the program.

Testing is the process of verifying that the program works as intended. Like all other aspects of programming, it's best approached by breaking up the process into three distinct phases.

In the first testing phase, typical data is used to verify the general working of the program, its subroutines and its computational structures. In the second phase, data with extremes — negative, zero, null and small and large values — are used to test for errors caused by atypical data. In the final testing phase, incorrect, incomplete or inappropriate data is used for checking the program's error-handling routines and capabilities.

Testing involves a critical look for abnormal operation and for objectionable errors. And, if the errors are serious, it means going back to an earlier programming step, such as problem definition, algorithm making or coding. You may have to rewrite the code to correct the error or abnormal operation.

Testing is an attempt to show that no bugs exist. Debugging is getting the program to work right by finding and correcting known bugs. They correspond to two common errors made in statistics: assuming that what is false is true, and assuming that what is true is false. Alone, neither procedure can guarantee no mistakes

```
0 'PCBLABEL.BAS + Determine Size of PCB Warning Label ++
5 'by Ronald F. Balonis 9/22/89
10 '
20 VOL=0:HGTH=0:WDTH=0:LGTH=0:WGHT$="":ANS$=""
50 TLE$="++ Find the Size of the Required EPA PCB Label ++"
100 CLS:PRINT TAB(0) TLE$
105 PRINT
110 PRINT"Enter height, width and length in inches or 0 to quit"
115 PRINT
120 INPUT "Height: ";HGHT
125 IF HGHT <=0 THEN 240:--STOP at the END
130 INPUT "Width: ";WDTH
135 IF WDTH <=0 THEN RUN 0
140 INPUT "Length: ";LGTH
145 IF LGTH <=0 THEN RUN 0
150 PRINT
160 VOL=HGHT*WDTH*LGTH:
165 IF VOL <1 OR VOL >9999 THEN RUN 0
170 PRINT "Volume = ";USING"#####.## cu in";VOL
175 PRINT
180 INPUT "Is Weight Greater Than 9 pounds? <Y/N> ";WGHT$
185 PRINT
200 PRINT TAB(0) "***** ITEM REQUIRES a STD ";
210 IF VOL <= 200 AND WGHT$ <> "Y" THEN PRINT "1 x 2 ";
220 IF VOL > 200 OR WGHT$ = "Y" THEN PRINT "6 x 6 ";
225 PRINT "EPA PCB WARNING LABEL *****:PRINT
230 INPUT "DO ANOTHER <Y/N> ";ANS$
235 IF ANS$="Y" THEN RUN 0
240 STOP:--ELSE END THE PROGRAM--
```

Table 1. This short program will help you determine the proper size of an EPA warning label for PCB capacitors.

PLATINUM™ SERIES
1-60 kW SOLID-STATE VHF TV TRANSMITTERS

Products of forward thinking

DX SERIES

10-50 kW AND HIGHER* DIGITAL SOLID-STATE AM TRANSMITTERS

85%
EFFICIENCY



THE-1
55 WATT SOLID-STATE FM EXCITER

At Harris, we've set our sights on the future of broadcasting. And every day, more AM, FM and TV broadcast stations around the world are reaping the benefits: Higher efficiency. Enhanced performance. Easier operation. Reduced maintenance. Increased reliability.

Harris' forward-thinking design engineers have worked with broadcasters to produce some of the most advanced—and most widely acclaimed—products in our history. Our patented digitally-modulated DX Series AM transmitters, all solid-state and single tube Platinum™ Series VHF TV transmitters, high efficiency MSDC UHF TV transmitters, and field-proven 55 watt THE-1 FM exciter are ready for you today. Each is a breakthrough product in its category.

For more information on these and other Harris RF products, call toll-free (800) 4-HARRIS, Ext. 3020. Outside the continental US, fax your request to (217) 224-2764.



HARRIS

ENGINEERING THE FUTURE OF BROADCASTING

Harris Broadcast Division • Marketing Department
P.O. Box 4290 • Quincy, IL USA 62305-4290

*Call us for DX applications to 500 kW.

See us at SBE Booth #615

Circle (27) on Reply Card

or a perfect program.

Example program

The applications program described here addresses the need to label PCB capacitors. For an engineer with a station having only a couple of PCB-filled items, the labeling process is mainly a regulatory nuisance. At a station with 40 or 50 PCB items, the problem is much larger. One important aspect of the labeling process is deciding which of two sizes of EPA-approved labels to use. This is where the computer can help.

The EPA regulations call for large PCB capacitors, those containing three pounds or more of dielectric fluid or a volume of 200 cubic inches or more, to be labeled with a standard 6"×6" EPA warning label. Small PCB capacitors, those having a volume of less than 100 cubic inches or a volume of 100 to 200 cubic inches with less than nine pounds of dielectric fluid, require a standard 1"×2" EPA warning label.

The first step in making an applications program is to develop a workable algorithm. This turns out to be easy because the manual method for finding the proper PCB label also should work in a computer program.

The manual algorithm (procedure) consists of three steps:

- Measure the capacitor and calculate its volume.
- Determine whether the item weighs more than nine pounds.
- Determine the correct label size by applying the decision rule from the EPA.

The rule is: *If the volume is less than or equal to 200 cubic inches, and the weight is less than nine pounds, then the item requires a 1"×2" EPA warning label. If the volume is greater than 200 cubic inches or the weight is greater than nine pounds, then the item requires a 6"×6" EPA warning label.*

With the algorithm defined, the next step is to write it into a workable program. Following structured programming concepts, the program should start with documentation and initialization of the variables. The actual BASIC program is shown in Table 1. Compare the program with the following description.

Program description

Line 0 is a remark statement, which lists the program name and briefly describes what it does. In BASIC, a remark or comment line is formed when an apostrophe or the word REM appears after the line number. The computer ignores everything on the line after that. Line 5 is a remark statement that tells who the programmer is and the program's date.

BASIC automatically initializes any variables. However, good programming technique suggests that variables be initialized

at the top. Line 20 does this with abbreviated variable names. VOL will be used to store the item's volume based on height (HGHT), width (WDTH) and length (LGTH). String variable WGHT\$ stores the yes/no answer to the question of whether the weight is greater than nine pounds. The string variable ANS\$ will store the yes/no answer to repeat the calculation process. Line 50 initializes the string variable TLE\$ to the program's title.

The program starts at line 100 by clearing the screen (CLS) and printing the title on the top line (PRINT TAB(0) TLE\$). Line 105 puts a blank line on the screen using a null print statement PRINT. Lines 115, 150, 175 and 185 do the same.

Line 120 begins the first step in the algorithm, inputting the measurement data to calculate volume. Line 120 sets the value of HGHT to whatever number you enter. Line 125 uses a simple "if-then" test to determine whether that number is less than or equal to zero. If so, the program jumps to line 240 and stops.

Line 130 sets the value of WDTH to your input number. Line 135 tests to determine whether the number is less than or equal to zero. If so, the program jumps back to line 0 and begins again.

Line 140 sets LGTH to the input value. Line 145 performs the same test again. If the value is less than or equal to zero, the program begins again.

The volume is calculated in line 160, and VOL is set to that number. Line 165 then tests the variable VOL for an error in size. If VOL is greater than 9,999 or less than one, the program begins again. Line 170 displays the calculated volume.

The second step of the algorithm is coded in line 180 as a question to be answered with a yes (Y) or no (N). The response is stored in string variable WGHT\$. The answer will be used in the third and final step of the algorithm.

The third step of the algorithm is coded in logical "if-then" statements in lines 210 to 230. Line 200 prints to the screen "**** ITEM REQUIRES a STD". Line 210 codes the EPA decision rules using a 2-level "if-then" statement for small PCB items that require a 1"×2" EPA warning label. Line 220 codes the EPA decision rules for large PCB items that require a 6"×6" EPA warning label. Line 225 prints to the screen "EPA PCB WARNING LABEL ****".

Line 230 asks "DO ANOTHER <Y/N>" and stores the answer in ANS\$. The "if-then" statement in line 235 uses the contents of variable ANS\$ to either restart the program (Y) or STOP it on any other answer.

Consider the value

This program points out an important fact about computers. They are extremely useful with repetitive tasks, in this case,

calculating the required size label. If, on the other hand, you only needed to label a few capacitors, it would not be worth the effort to develop, debug and use such a program.

Before you take on that next task, ask yourself whether the computer could help. It may be that a computer can help you be more efficient. Perhaps it could help you develop information that would make your station more competitive. That would translate into profits.

Given a proper program and correct data, a computer produces highly reliable results. It may be that some decision you need to make today could benefit from such accuracy. Today's broadcast engineers don't have the time to make mistakes, let alone make up for unfortunate results.

**A NEW ERA
IS ABOUT TO OPEN.**

SONY®





THE COMPLETE SYSTEM.

It's the dawn of a new era in television: the era of Sony System Solutions™. It means the introduction of revolutionary systems products that together will shape the future

of broadcasting. Switchers. Digital effects. Digital audio. Stillstore. And our own dual-channel RAM recorder. All Sony products that have extended the most advanced

technology into a total system.

And it could only have come from Sony, the innovator in U-Matic® technology. CCD technology. Betacam® products. And ground-breaking




ONLY FROM SONY.

digital technology. Advances that set industry standards. Advances backed up by traditional Sony service and reliability.

Now, Sony is setting stand-

ards for the future. Because, for the first time, you only have to look to a single source for your system needs. For products that are reliable. Products that prove themselves superior—

from the moment they're plugged in. Products that don't just give you system technology. They give you Sony System Solutions™ technology, the solutions you've been waiting for.

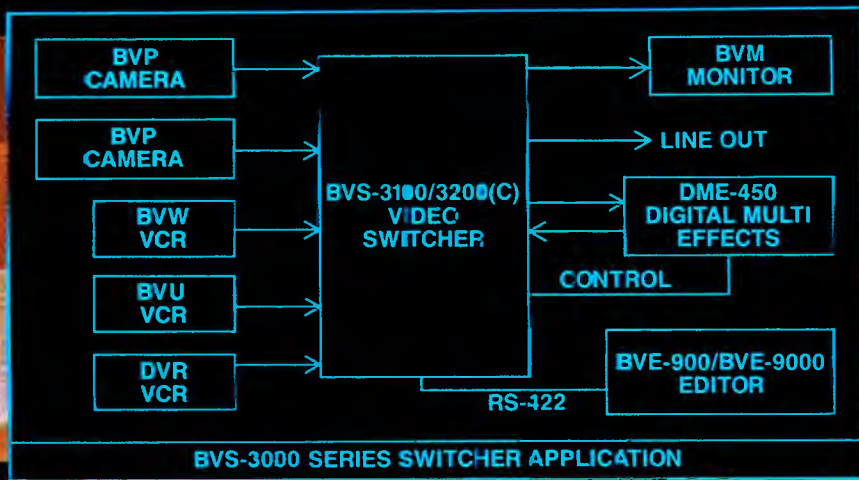


SWITCHERS

Announcing Sony System Solutions™ line of smarter switchers. A line with some of the most advanced features ever engineered. A line designed to meet a wide range

of requirements and budgets. Take the DME-450. As Sony's most basic switcher, it comes with over a hundred digital effects including true 3-D, cut, mix, and more than

one hundred-fifty wipes. Border and background color generators are also standard. Furthermore, no time-base correctors are required for any of the VCRs.

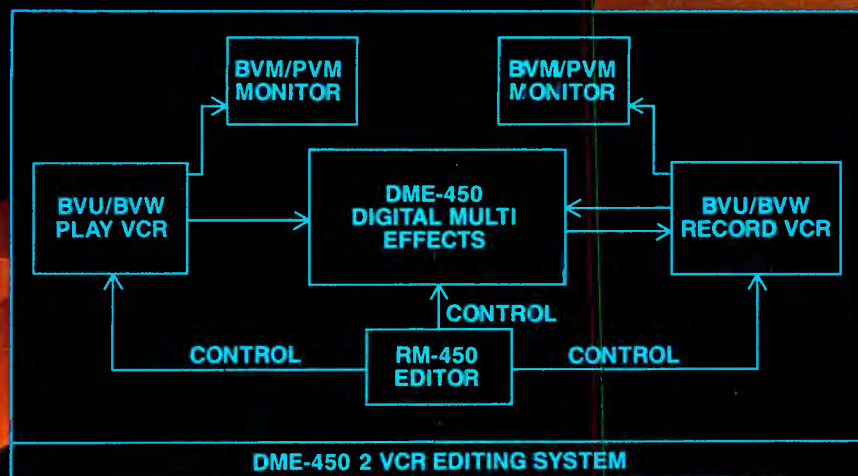


FROM SONY.

Then there's the BVS-3000 series. Ten inputs plus all the wipe patterns and key effects you'd expect from a compact production switcher. But it can also give you digi-

tal effects with its unique link capabilities. When hooked up to the DME-450, this compact combination results in unprecedented power.

They're all switchers that know how to work with your other equipment. So they can not only do more, they do it all better. From the moment they leave the box.

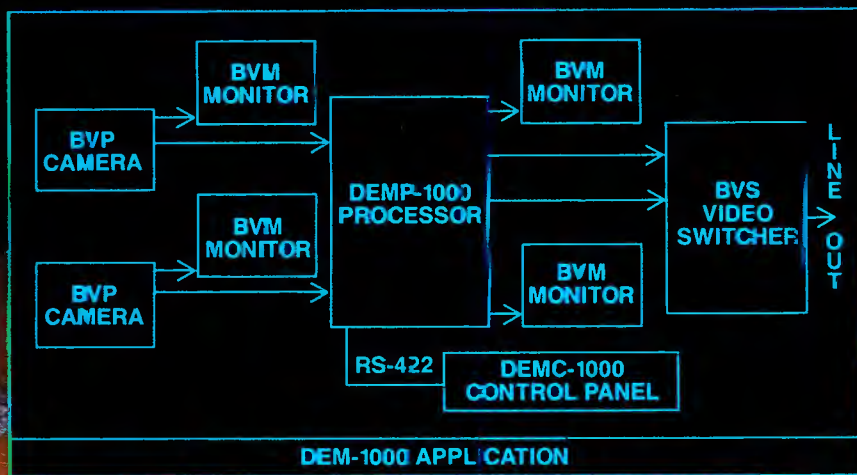


SYSTEMS COMPONENTS AND

Sony opens up new possibilities with advanced digital technology like Stillstore and the DEM-1000. As well as peripherals that enable this uniquely modular system to work at

maximum efficiency today—and help you grow tomorrow.

Because the Sony Stillstore's optical storage is on Write-Once-Read-Many (WORM), and erasable Mag-

neto Optical (MO) discs, its archiving capabilities and transportability are unparalleled. Additionally, the DNS-1000 distributed hardware is linked by a unique network-

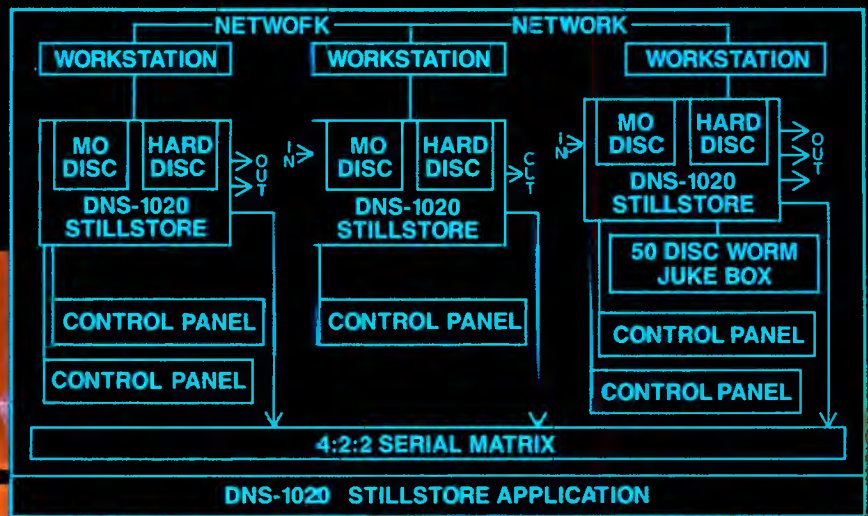

PERIPHERALS FROM SONY.

ing system which lets each user take full advantage of all the resources on the network.

Then there's the DEM-1000, a remarkable achievement in motion manipulation.

With its simultaneous read-while-write capability, the DEM-1000 RAM based video recorder actually gives you real-time slo-motion. It also provides stunt motion, which

allows virtually unlimited manipulation of the video motion. You also get a host of other features—like instant recall, editor control, and two-channel simultaneous I/O.



**DESIGNED TO WORK WITH YOU.
DESIGNED TO WORK TOGETHER.
DESIGNED TO WORK RIGHT
OUT OF THE BOX.**

Sony System Solutions™.
It works better because it
comes from one source. Better
because it comes with the reli-
ability, compatability, and ser-
vice you've always expected

from Sony. The number one
name in broadcast.

SONY®

To find out how you can
open a new era right in your
own station or facility, call
(800) 635-SONY.

Sony Communications Products Company, 1600 Queen Anne Road, Teareck,
NJ 07656. © 1989 Sony Corporation of America. Sony, U-Matic, Betacam,
System Solutions are registered trademarks of Sony.

BROADCAST PRODUCTS

www.americanradiohistory.com

The CCD scoreboard

By Rick Lehtinen,
TV technical editor

CCDs experience stellar growth in features and utility.

Charge-coupled devices, called CCDs, arrived on the camera scene a few years ago, and after a few false starts, they are firmly entrenched. CCDs have many inherent advantages. Solid-state image sensors are making more of our pictures than ever before. Also, recent product introductions may have paved the way for a return to the use of "stringers" in TV journalism, a concept that was used back when film was king.

CCD pluses

CCDs took the ENG camera market by storm. The reasons were simple. They were clearly superior in terms of cost, size and weight. The chip cameras had no requirement for high voltage, greatly simplifying the power supplies. The CCD's scanning circuitry is digital, fabricated out of ICs, requiring none of the yokes or sweep circuits needed for tubes. CCD cameras have no filaments to heat, so they are ready for service instantly. Furthermore, CCD cameras are rugged, nearly impervious to mechanical shock and highly immune to the emissions of nearby walkie-talkies.


Aside from a few possible "smear" artifacts, chip cameras can work from near darkness up to strong backlight. If you have to hike or crawl or hang from a limb in the line of duty, it is comforting to know you won't irrevocably "burn in" an image on a tube face by letting a shot stray into the sun or a strong light. In short, CCD cameras are a great choice for ENG.

Other videographers also can reap the

advantages of chip technology. Computer graphics system users quickly jumped on CCDs as the cameras of choice for scanning artwork into their systems. Although the image might not always have had quite as high a resolution as a 3-tube camera, and although the grid pattern on the CCD face sometimes caused aliasing with the image on the copystand, CCD


cameras were adopted quickly because they never drifted out of registration.

CCD sensors possess inherently perfect geometry. This means that what is a circle on the copystand never looks oblong on the monitor. Also, registration is constant over the entire screen surface. Corner registration is not an issue with CCD cameras.

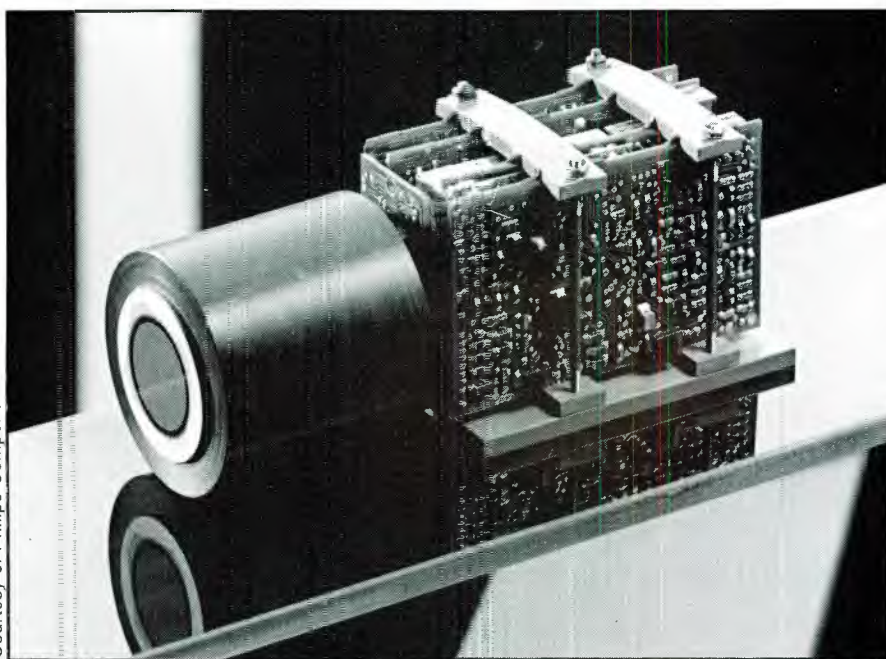

Courtesy of Philips Components

Intensified CCD image subassembly can see even in overcast starlight. A tapered fiber-optic bundle transfers the image from the intensifier tube at front onto the CCD array.

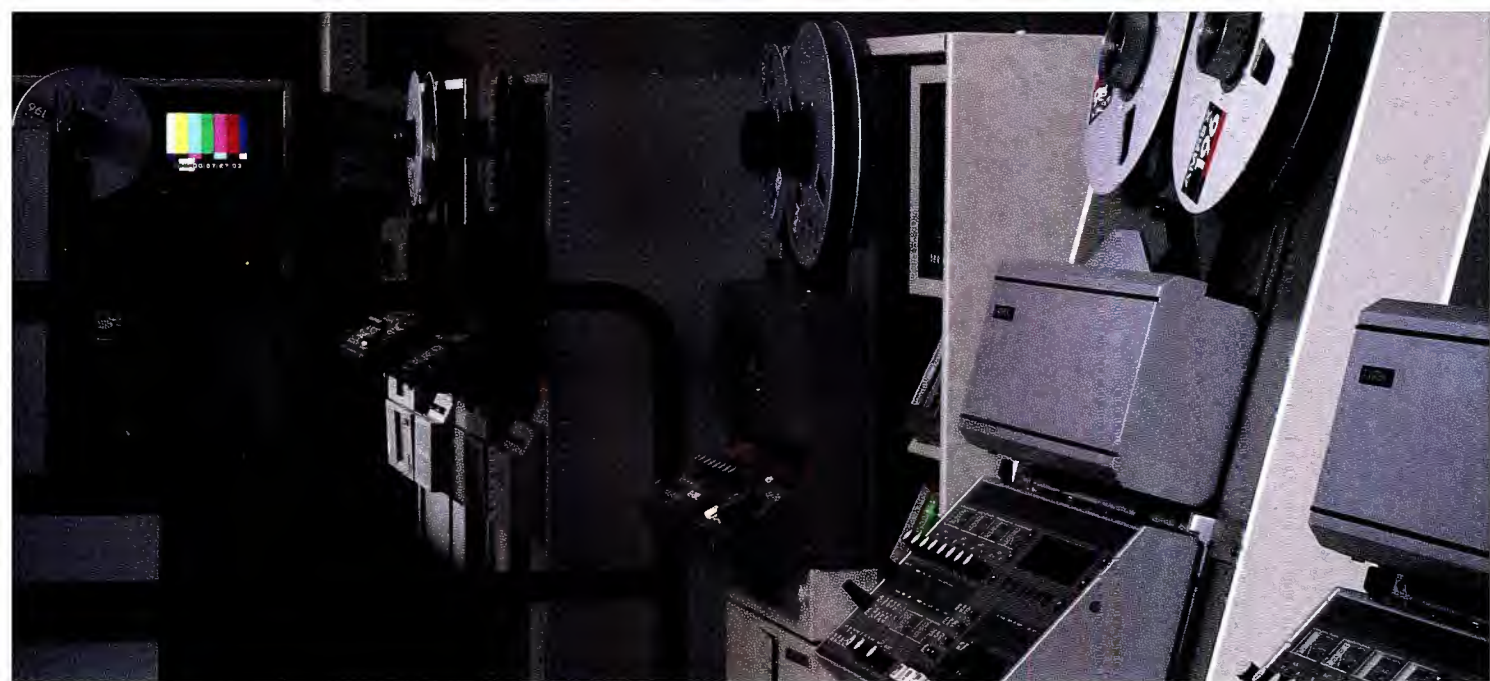

A convincing argument for Type C from a company that invented D2.

We didn't spend five years pioneering the world's first D2 composite digital recorder just to win technology awards—selling D2 machines is one of our top priorities.

But another and even more important priority for us is to make sure that the video professionals we serve have appropriate equipment for their jobs. And that they continue to look to Ampex



"...business more than tripled this year using Type C..."

Bill Stokes,
Bill Stokes Associates



*Ampex Zeus
Advanced
Video Processor*

for the straight story about that equipment and its applications.

A case in point is the question we recently asked several of our customers who purchased Type C *after* we introduced D2.

"With the introduction of D2, why did you purchase Type C?"

We think the answers we got may interest you if you're considering the purchase of *any* video machine.

Bill Stokes (*Bill Stokes Associates* in Dallas), came right to the point. "My business has more than tripled this year, and I'm using Ampex Type C machines. Is there any better reason to buy more? With the new TBC-7 or the Zeus processor they make perfect pictures. Besides, I like the service I get from Ampex."

Jerry McKinzie with *Cycle-Sat Communications Network* in Forest City, Iowa, (a satellite courier,


The VPR-80's Automatic Scan Tracking head and its erase head are both easily removed and replaced with only a screwdriver.





production, and post-production business), thinks it's important to be able to update easily as his business changes. "The hardware and software upgrades Ampex makes in their equipment allow me to keep my facility current, and to always give my customers the newest look. I like that, and my customers demand it."


Darrell Anderson, whose company *Anderson Video* in Los Angeles, recently purchased several



The VPR-3's incomparable acceleration allows a 30 second segment to be re-cued and synchronously played in 2 seconds, using one hour reels.

"... Type C business is readily available..."

Darrell Anderson, *Anderson Video*



VPR-3s, pointed out that the Zeus port allows interface with D2. Darrell believes that, "Type C and D2 will co-exist successfully in a well-managed

facility. Type C business is readily available." We were gratified to hear that he, "bought the best Type C machine he could find."

Consider your purchase decision carefully. When the excitement of a new equipment introduction passes, and you've put the pros and cons down on paper, Type C may be exactly the right machine for your application. After all, it's still the world's broadcast interchange and distribution standard.

"... hardware and software upgrades keep my facility current..."

Jerry McKinzie,
Cycle-Sat Communications Network




And it is obviously the perfect choice for facilities that are moving up from 3/4-inch.

We'd like to be involved in your decision-making process, and we're as close as your telephone. Call Ampex at 1-800-25AMPEX for some real help with a difficult decision.

AMPEX

BE-689-TYPEC

A TELEX INTERCOM WITH WHEELS

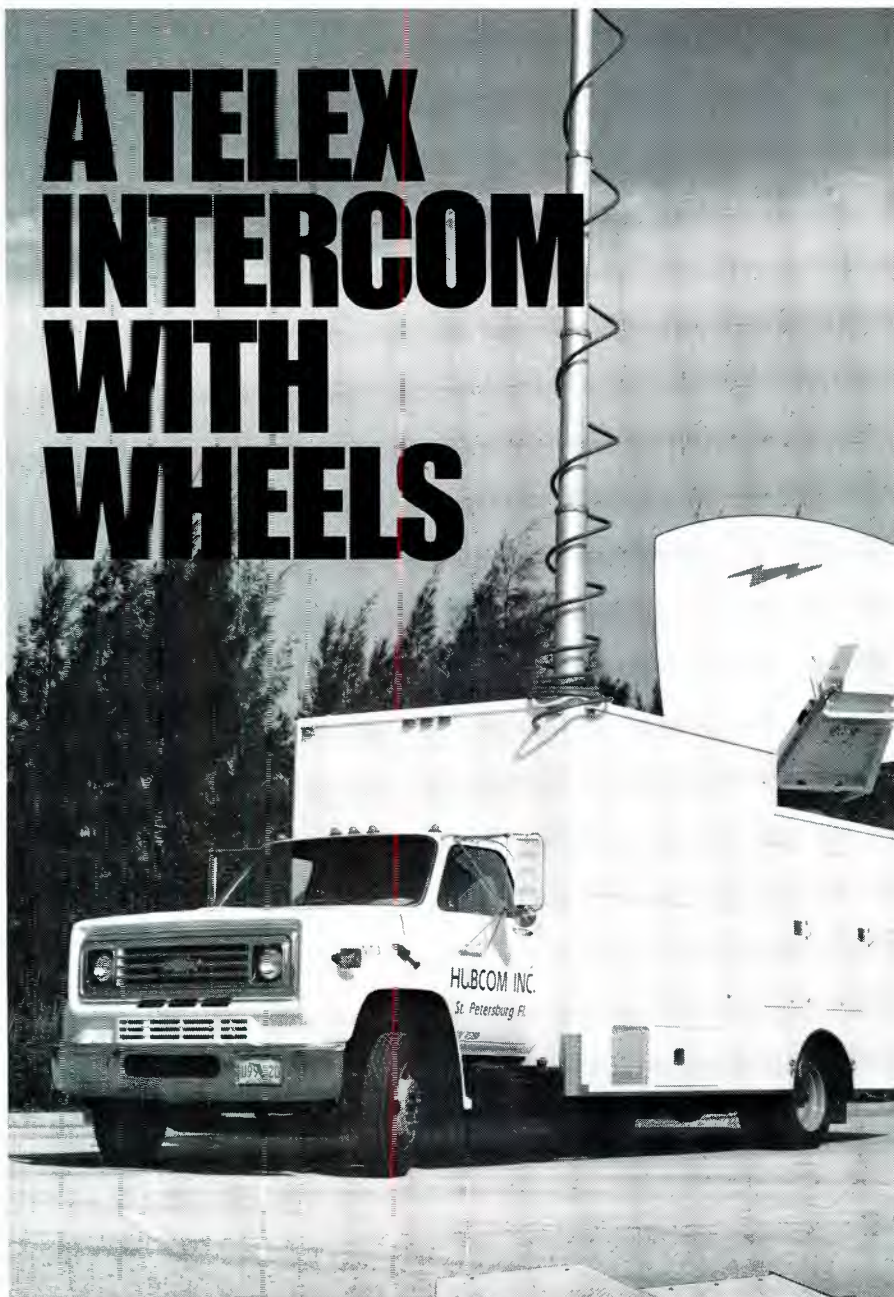

When you've spent this much for wheels, can you afford anything but the best intercom?

When the call comes from dispatch, you have to roll. You literally move your broadcast station to the news making scene via the mobile van. Telex intercoms are designed to tie your on-the-scene communication network together. Our Telex IC-4M four-channel master station is a necessary requirement of mobile broadcast vans nationwide. The IC-4M unites producer, camera technicians, director and talent together for clear, reliable

communication. The IC-4M is easily flush-mounted and is built ruggedly to take the punishment of a fast-moving news crew. Telex intercoms can take it.

Telex also offers a line of quality belt-pack intercom stations and intercom headsets to complete your communication network.

For more information about Telex Intercom Products for broadcast, write to: Telex Communications, Inc., 9600 Aldrich Avenue South, Minneapolis, MN 55420.

© 1989 Telex Communications, Inc.

TELEX®

Circle (28) on Reply Card

Breaking down barriers

Recent product improvements are "pushing back the envelope" on CCD performance.

• Spectral response:

Although CCDs already are star performers, designers know that certain frame-transfer CCD sensors exhibit a poor spectral response in the blue-to-ultraviolet wavelength. Although this might not be obvious to all users, it could affect the screen image. Furthermore, these frequencies might become increasingly important as research continues in lighting systems for chroma-keyers. One new lighting product, introduced at NAB 1989, uses specially treated fluorescent fixtures instead of hot incandescents.

Many cameras are especially sensitive to ultraviolet light. This means that UV scene reflections contribute to picture detail. The new lighting system is rich in UV, creating a lighting model that is said to be ideal for matte work. A CCD camera that is insensitive to this frequency may not be capable of optimum performance.

However, a new coating, developed in the United States and licensed to Thomson CSF, may solve the problem. The proprietary coating is applied directly to the front side of the silicon. The coating is temperature-insensitive and stable through time. The coating extends the response of CCDs up to 120nm. (See Figure 1.)

• Low light sensitivity:

Although CCD cameras generally are superior to tube cameras when it comes to working in low light, certain special setups, such as silicon-intensified target (SIT) cameras could do the job better. Philips components recently released an intensified CCD sensor system (shown in the photo) that is able to work right down to overcast starlight.

The sensor is available as a subassembly for incorporation into other manufacturers' products. The monochrome system is particularly suited for submarine, aerospace or other harsh, gloomy environments. Light entering the assembly is intensified by a special image-intensifier tube. The intensified image then is transferred to the CCD via a tapered fiber-optic bundle, which matches the image to the CCD face size.

• Cost:

Although they are popular in camcorders, CCDs have yet to make any real headway into the low end of the video market. Part of the reason for this is expense. The CCD circuitry in many of today's cameras may be too complex, hence needlessly expensive, for many operations such as video phones, door security systems, automotive rear-view systems and so on.

HERE ARE THREE WAYS TO CONVERT CASSETTES TO CASH

- ✓ **Add new profit opportunities** by starting your own high speed tape duplication department.
- ✓ **Increase production** of your current tape duplication department by adding modules as you grow.
- ✓ **Save the money** you're spending on cassettes now. Produce them yourself for only the cost of the tapes.

Telex is the leader in high speed audio tape duplication equipment with products ranging from the compact, economical

Copyette® series to the professional 6120XLP shown here.

The Telex 6120 series provides outstanding audio quality, unlimited expandability and profitable production capabilities. It's available in high production 16X speed or 8X speed for highly critical audio needs.

Hearing is believing
For full details including specifications and a free demo tape, call or write today.



6120 High Speed Duplicator

Call toll free: 800-828-6107

Telex Communications, Inc.
9600 Aldrich Av. So.
Minneapolis, MN 55420

BE 9/89


Name _____
Company _____
Address _____
City _____ State _____ Zip _____
Telephone _____

© 1989 Telex Communications, Inc.



TELEX®

Circle (29) on Reply Card

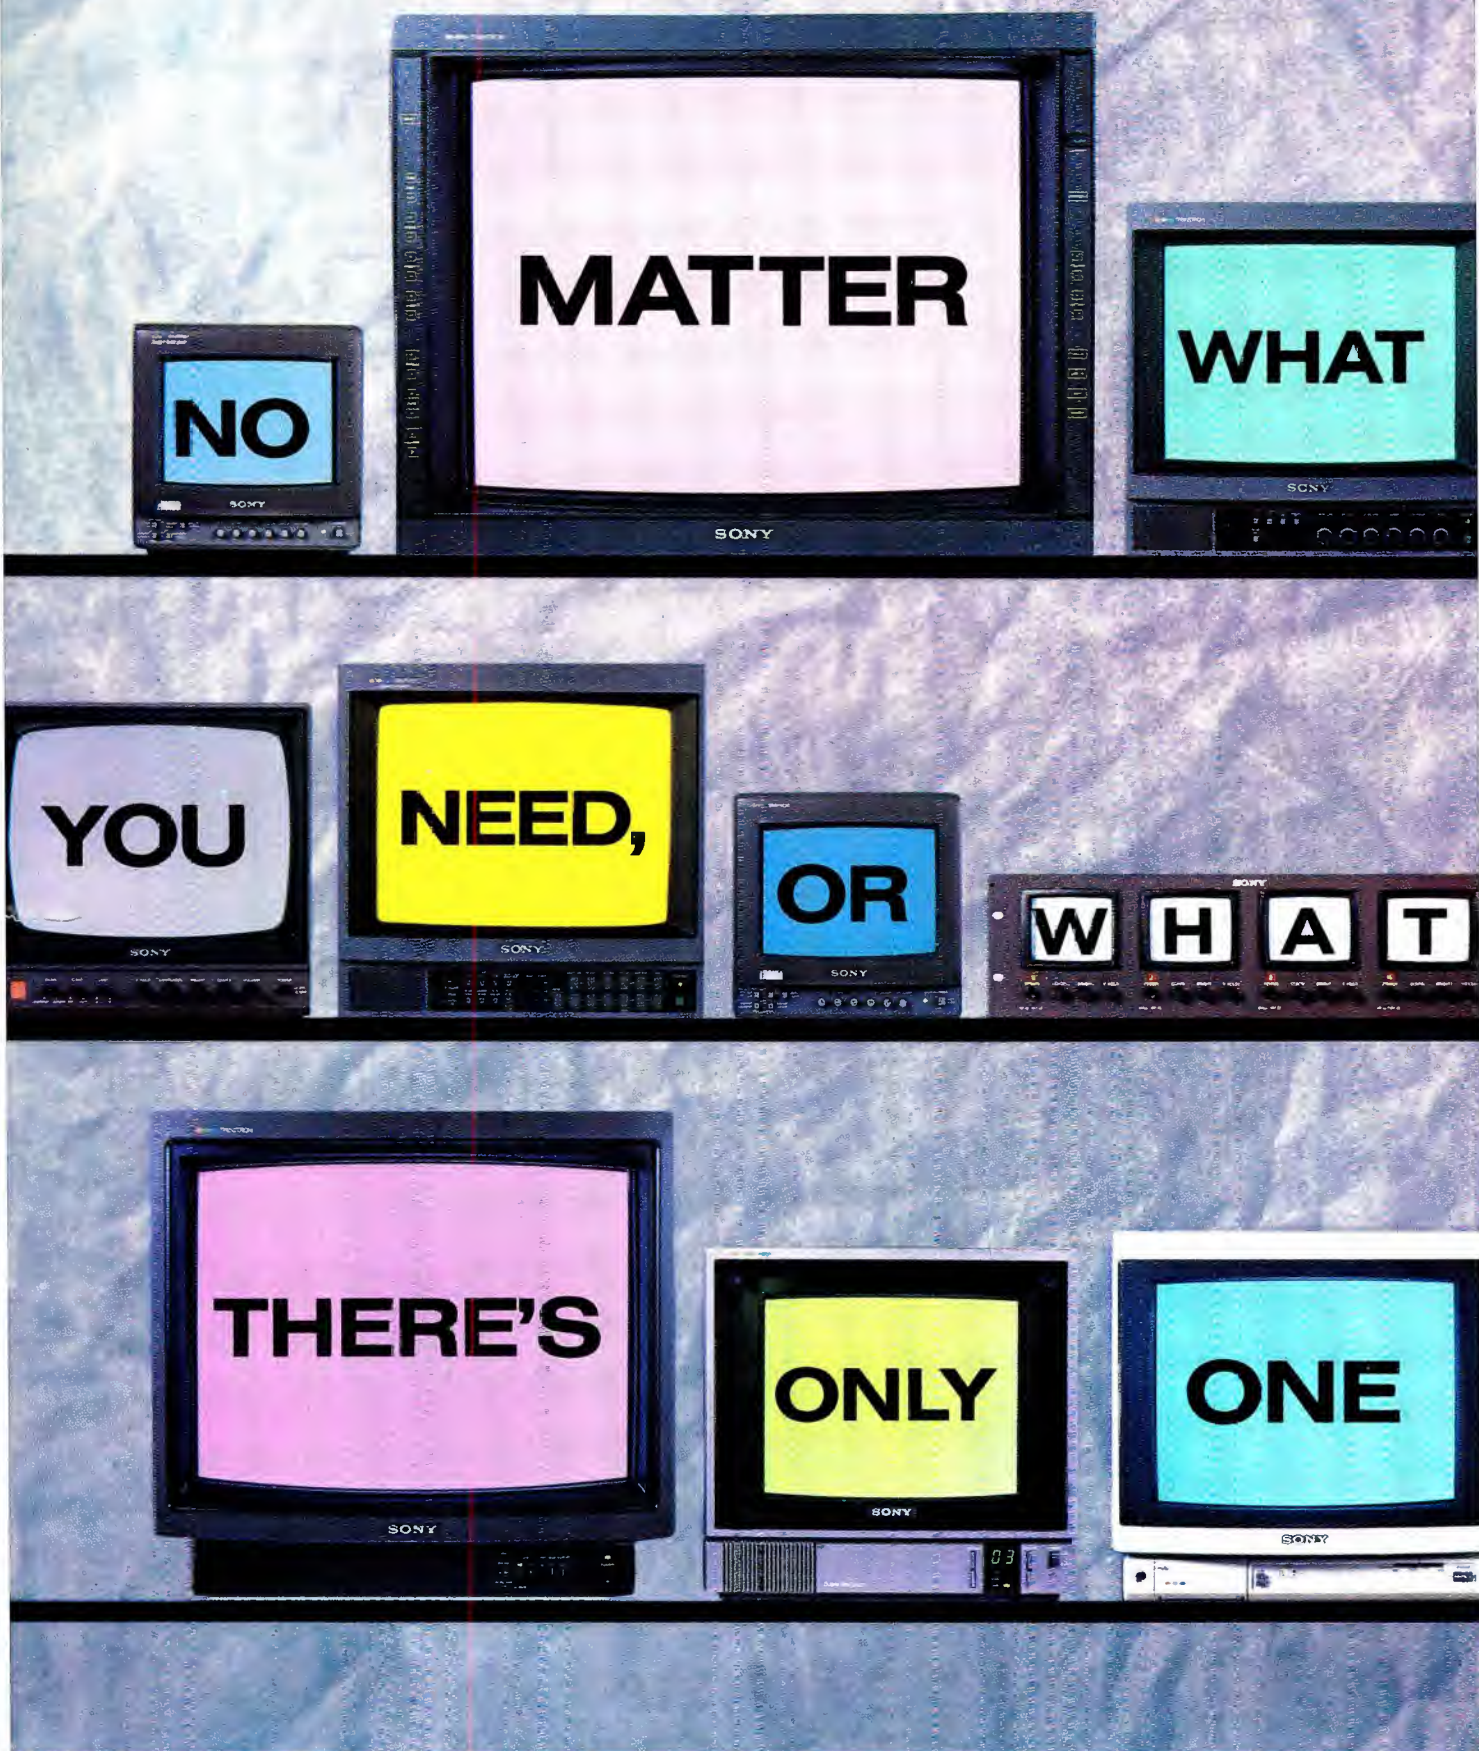

And only one number to call. For more information on Sony's latest innovations in its line of quality



monitors, dial (800) 523-SONY.

SONY®

Sony Communications Products Company, 1500 Queen Anne Road, Teaneck, NJ 07666. © 1989 Sony Corporation of America. Sony is a trademark of Sony.

PROFESSIONAL VIDEO

www.americanradiohistory.com

Lenses: Is what you see what you get?

By Carl Bentz, technical and
special projects editor

**Lens manufacturers are working to make sure that what you see
in the scene is what you see on the screen.**

Designers of new TV equipment face the challenge to produce images that are closer and closer to reality. Every piece of equipment and every peripheral device can put its signature on the overall performance of the camera-to-receiver signal chain. What comes out can be no better than what goes in. The image quality on the home screen is a function of the image source, ultimately the TV camera. As a result, the entry point of pictures — the lens and pickup device — becomes a critical factor in the TV system.

Looking into the camera

Let's do some rough calculations. If the $\frac{3}{8}$ -inch (0.6667-inch) measurement of the optical format is the diagonal of the image on the pickup device, then the horizontal distance is 0.8 times the diagonal, or 0.53336 inches. The vertical distance is 0.6 times, or 0.40002 inches. For NTSC, divide the vertical dimension by the number of active video lines, which we will say excludes about 42 lines involved in the vertical blanking interval ($525 - 42 = 483$), to arrive at 0.000828 inches per scan line. A CCD with a pixel array of 610×492 (according to specifications released at NAB) drops down to an even narrower scan line of 0.000813 inches. (On later observation of the picture on a 27-inch-diagonal CRT, which is approximately 40 times larger than the $\frac{3}{8}$ -inch pickup de-

vice, the horizontal scan line becomes 0.03 inches in width. In comparison, a 0.31mm dot pitch — the distance between dot centers — on a high-resolution CRT is 0.0122 inches.)

CCDs have proved quite effective as camera pickup devices in numerous applications. The reality of a pixel-array structure with a finite number of light-sensitive locations and finite dimensions of those locations theoretically places a limitation on the CCD, but this does not mean that CCDs cannot produce high-quality images. Quite the contrary is true; cameras introduced at NAB '89 displayed resolutions surpassing a horizontal equivalent of 700TVL. However, when compared with tube-type pickup devices, CCD cameras still have some ground to gain.

For a $\frac{3}{8}$ -inch tube, there is no finite pixel-array structure. Although the target is, in essence, an array of photodiodes, the dimensions of the diodes are almost molecular. (The distance between centers of the photoconductive diodes is about 12 microns.) For tubes, possible resolution, ranging upward from 700 lines, has a great deal to do with the width of the scanning electron beam. Obviously, for smaller tubes, the beam diameter must be reduced to get the same kind of resolution that is obtained from larger-diameter devices. Still, to date, the lack of the "finite" array structure in the tube means a

small advantage in tubes vs. CCDs, but indications are that CCD pixel sizes will continue to decrease.

Pickups and lens limits

The optical system of the camera has a role in determining whether you get (on screen) what you see (on scene). In most cases, the capability of the lens exceeds that of the camera upon which it is mounted, but new ingredients in the video recipe make some aspects of the lens-camera combination worthy of close scrutiny.

For example, beyond the concern of finite CCD pixels vs. "continuous" photosensitive material, control of pickup device placement and alignment requires attention. With tubes, there is a suggested orientation of the tube inside its deflection yoke for best possible results. The orientation is critical, but a degree of rotational tolerance is allowed. Freedom of the tube and yoke to move forward and backward achieve the best optical focus of the image on the faceplate in each color channel. Static and dynamic electrical focuses are among adjustments to be checked periodically on all tube-type cameras. Knowledgeable engineers and technicians can change and realign tubes with relative ease.

Adjustment is not the case in CCD designs. CCDs have predetermined, absolute alignments — horizontally, vertically, rota-



GO AHEAD! MAKE YOUR DAY.

Show Panasonic Broadcast Systems your busiest log, your toughest break. We'll make your day, and we'll make it easier.

Over 25 stations nationwide rely on Panasonic's M.A.R.C. to handle every scheduled playback from I.D.'s, spots and promos to programs and network. M.A.R.C. works elegantly with traffic systems from Bias, JDS, Columbine or Enterprise, and finds trouble long before it hits air. As-Run logs document what ran, when, and if not, why not.

The M.A.R.C. is one tough customer. Its superior 1/2-inch MII image quality, its street-smart software and its advanced Matsushita robotics make the M.A.R.C. unbeatable.

Panasonic's M.A.R.C. stays ahead technologically. Its VTR interface controls outboard 1 inch VTR's; a new optional Off-Line Cassette Dub System enables dubbing material onto MII cassettes with minimal operator entry.

So, go ahead. Sit down at M.A.R.C.'s keyboard, and let M.A.R.C. make your day.

Panasonic Broadcast Systems Company Field Offices: (Northeast) Washington, DC 1703/759-6900
(Southeast) Norcross, GA (404) 925-6772 (Midwest) Arlington Heights, IL (312) 981-7325/(317) 852-3715
(Southwest) Fort Worth, TX (817) 685-1132, (Western) Cypress, CA (714) 373-7209 (Northwest) (408) 861-7574
Bias, JDS, Columbine and Enterprise are marks of their respective owners.

Panasonic Broadcast Systems Company, One Panasonic Way, Secaucus, NJ 07094 (201) 348-7671

Circle (33) on Reply Card

Panasonic Broadcast Systems

aligned. Deviation from alignment produces image distortions, primarily laterally. To maintain the alignment, the structure holding the elements must be physically stable. It must not flex during movement of the different lens groupings, which rules out some lightweight materials. However, magnesium-steel and other space-age alloys can be cast into a honey-comb structure that does provide sufficient strength to prevent flexing with a reduced weight.

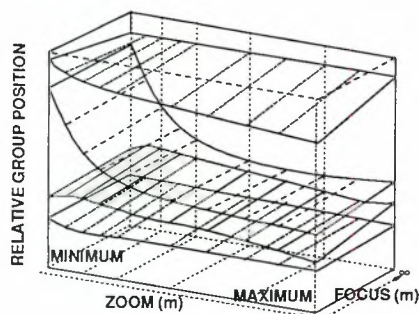


Figure 2. In standard zoom lenses the zoom and compensator groups move through mechanical cam-follower linkages. With microprocessor control, if zoom is altered, the other groups are optimally positioned, according to data stored in a ROM. Similarly, if focus is changed, the remaining groups are repositioned as necessary.

What may not be apparent to many is the complexity of lens group position in relation to the zoom positioning. Figure 2 provides a view of the relative position of each group along the zoom range plotted against the relative focal length of the lens assembly. It is obviously a rather complicated relationship.

In the past, the typical solution to positioning of different lens groups has been to use a groove-follower arrangement. As the operator turns the focus and zoom rings, a system of threaded components inside the assembly forces a lens group to move. Alternatively, a zoom rocker switch energizes a motor to make the zoom and focus adjustments. A follower-cam attached to each group extends into a precision-machined groove. The cam may include a roller with bearings for easy tracking with a minimum of wear.

Inasmuch as the assembly is relatively sealed from the elements, abrasion resulting from the ingress of dirt is usually not a problem, unless the lens is exposed to extremely hostile conditions. If dirt does enter the mechanism, wear may result in sticky points along the zoom range, producing jerkiness in the zoom action.

By bringing microprocessors into the lens, new solutions have been found for controlling the accuracy of internal operation. In one application, small motors, one for each of the lens groups, control the optimum positioning of each group, based upon values stored in a PROM chip.

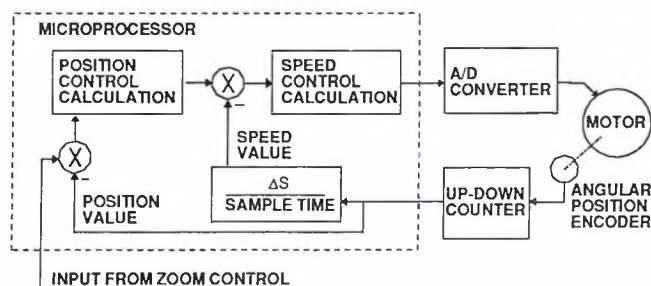


Figure 3. A motor control circuit for a microprocessor-controlled zoom lens.

Data in the PROM, determined during lens design, indicates exactly where each group should be, based upon operator-determined zoom and focus settings, and provides system diagnostics. When the camera is turned on, each motor calibrates itself by moving its group to a starting point, after which the microprocessor, in conjunction with angular encoders, determines the position. During operation, if zoom is changed or if focus is changed, the other three groups are adjusted accordingly to optimum positions. Figure 3 shows a block diagram of such a control system.

Today's lens systems provide other amenities to the camera operator. While the widely used mechanical lens assemblies use etched markings on the barrel and rings to indicate zoom and focus positions, some larger studio or OB lenses use a pointer moving along a scale to show the zoom position. The introduction of microprocessors offers other possibilities. For example, a multidigit LED array displays the zoom setting, or with the information in a digital form, the setting can be routed through the camera electronics to be displayed in the viewfinder, either as an effective lens length in alphanumeric or as a marker along a relative zoom position scale.

The mechanisms of zoom lenses allow some maintenance adjustments. In the smaller units, particularly for ENG, the adjustment is made by popping a protective cover off the adjustment screws. Some large studio and OB systems require that the housing be removed to reach the adjusting points. Others have arranged for all maintenance controls to be accessible through a small hinged opening.

The proper care of TV lens systems is important for continued high-quality imaging. Appropriate cleaning and adjustment, as outlined in a lens operation manual, typically will keep the unit in excellent operating condition. Abuse, rough handling and operation in hostile environments are precursors of problems. If the unit becomes damaged or suffers significant wear, it is wise to return the lens to the manufacturer for repairs, particularly if the damage or wear is internal. At-

tempts to make repairs could easily cause misalignment of the complex structure of optical elements and result in highly unsatisfactory performance.

As seen on the screen

Most of today's optical systems perform admirably. There is concern for the problems of chromatic aberration with CCD cameras, but manufacturers are taking steps to alleviate the error. The critical nature of aberration will become more important as we move toward higher resolution and high-definition imaging, simply because the individual pixel area of the pickup devices undoubtedly will become smaller. What we see in the scene usually will be well-represented by what we see on the screen, but manufacturers are searching for ways to keep ahead of the revolution in image-pickup quality.

Acknowledgment: Information for this article was provided by Canon, Fujinon and Schneider.



This switcher handles standard bandwidth like it's going out of style.



TVS/TAS-3000 Distribution Switcher

The new TVS/TAS-3000 video/audio distribution switcher from BTS handles standard bandwidth switching in stride. But the fact is, standard bandwidth may not be the standard much longer. And that's why the TVS/TAS-3000 is not your standard switcher.

With the advent of wide bandwidth video, you'll need a switcher that can handle the new higher bandwidth signals. The 3000 will. It provides a video bandwidth of more than 50 MHz, measured with a full-amplitude sine wave or video signal. Which makes it upwardly compatible with HDTV or computer graphics—no matter what the standard.

The TVS/TAS-3000 also delivers the cleanest signal and expands to accommodate any matrix size to meet your specific needs.

And if high bandwidth capacity isn't a require-

ment, BTS still has you covered with our best-selling switcher, the TVS/TAS-2000. The 2000 represents the same advanced technology and quality as the 3000 in a standard bandwidth switcher. BTS also offers a full-range of control panels and distribution amplifiers for a complete system designed, tested and guaranteed by one supplier.

All BTS switchers undergo 100% computerized factory testing and are protected with a 5-year warranty. In the unlikely event you do have a problem, simply return the board for a free replacement.

Dependable, performing switchers from BTS. Anything else is substandard. Call for information and technical specifications today: **1-800-562-1136, ext. 21.**

BTS
The name behind
what's ahead.

BTS is Broadcast Television Systems, a joint company of Bosch and Philips P.O. Box 30816, Salt Lake City, UT 84130-0816.

Circle (36) on Reply Card

www.americanradiohistory.com

Designing an FM booster system

By Steve Broomell

An FM booster system might be a valuable addition to your station's technical portfolio, but it requires careful planning.

In 1987, the FCC issued new rules allowing FM broadcast stations to install and operate supplemental transmitters within their service areas. The purpose of the transmitters was to augment coverage areas that suffered from reception problems. Typical problems included multipath, weak signal strength caused by terrain, IM interference and receiver blanketing caused by other stations. These supplemental stations are classified as boosters and are licensed under Part 74, Subpart L.

These new boosters share several similarities with those previously covered by Part 74:

- They operate on the same frequency as the station they boost.
- They must be located inside the station's 60dBu (1mV/m) contour.
- They cannot degrade the original service of the station.
- They must carry the same programming and must be licensed to the primary station.

These new boosters differ from the classic booster in many ways:

- They may be operated as stand-alone transmitters, in that they can be fed programming by means other than direct off-air pickup.
- They may operate with as much as 20% of the power of the class of the primary

station to which they are licensed.

- They may not extend the service area of the primary station. (In many cases this rule is actually more liberal than the 60dBu criterion.)
- If operated above 10W of transmitter power, they are governed by Part 73 technical standards.
- Booster antenna systems are not restricted by Part 73 criteria for FM directional antenna systems.

A station and its consultant should consider several factors before applying for a booster license. However, only technical considerations will be discussed here.

The decision process

To decide whether a booster might be a valuable addition to your station's technical portfolio, answer these questions:

- Does the station suffer from the signal problems discussed?
- Do these problems justify a significant capital investment in its solution?
- Are the problems induced by factors that are not under the control of the licensee, such as terrain, location of other stations or inability to further improve the existing main transmitting plant?
- Is the station satisfied that such a booster will not enlarge its current coverage area to any significant extent?
- Does the station recognize that a booster will not be a total solution to any of these problems?

If you can answer "yes" to all these questions, a booster operating under the new Part 74 rules may be a wise investment for your station.

Implementation

As with any transmitter installation, study and engineering must be applied to the system design. In fact, greater engineering effort often is needed.

The first step is to quantify the specific coverage problem. Steps then can be taken to design a system to solve it. This process usually requires field-intensity measurements in the problem area(s).


Figure 1 shows the contour of a multipath and first-adjacent interference problem area. The contour was developed through field tests. Note that this is not simply a field-intensity contour. The map represents the perimeter of a specific area. Inside the contour, the service was poor, but no improvement was needed outside the contour.

At various points on the perimeter, field-intensity values are shown. Note that many of them are quite strong and, in some cases, they are above 60dBu. In other cases, the signal was too weak to be usable. Nonetheless, problems existed at all those points.

The solution was a synchronous repeater and a custom antenna system with carefully controlled vertical and horizontal patterning. The synchronous repeater

Broomell is manager, engineering services, Omega International, Irvine, CA.

How to take control of a broadcast station.

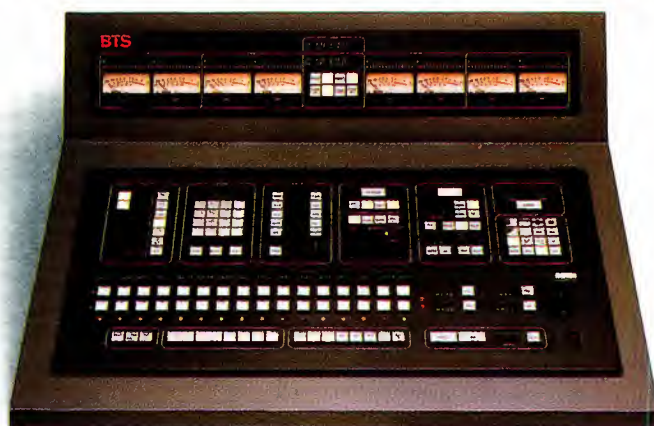

MCS-2000 Master Control Switcher

Go ahead, be ambitious. Controlling a broadcast station is no small potatoes, but these advanced products from BTS make it easy by giving you total control of all on-air programming from two workstations.

The MCS-2000 Master Control Switcher together with the BTA-2300 Automation System automate many of the routine operations that are currently handled by staff, which makes both your people *and* your equipment more efficient and productive. Computerizing your station also drastically reduces programming errors. Since that prevents make-goods, the system quickly pays for itself.

You simply pre-program the BTA-2300 Automation System to air all programs, station and



BTA-2300 Automation System

commercial breaks exactly as you want, in real time. The Master Control Switcher accesses material from whatever sources you select: Betacarts, character generators, live feeds or satellite systems, for instance.

The MCS-2000 is user configurable, so you can select (and change) which buttons access which sources. Since it uses the existing outputs from the routing switcher, you don't need a second router. And its on-air bypass feature lets it serve as a simple production switcher if necessary.

The computer system is not only powerful, it's extremely flexible, allowing you to revise the program on a moment's notice. And there's no more reliable automation system available. Both products go through 100% computerized factory testing and have a 5-year warranty.

So take a controlling interest in the station. Find out more about the MCS-2000 Master Control Switcher and the BTA-2300 Automation System. For complete information and technical specifications, call BTS at 1-800-562-1136, ext. 31.

BTS
The name behind
what's ahead.

BTS is Broadcast Television Systems, a joint company of Bosch and Philips. P.O. Box 30816, Salt Lake City, UT 84130-0816.

Circle (37) on Reply Card

www.americanradiohistory.com

(which will be described further), provides the best performance at high power when the signal ratio of the booster vs. the primary station is low.

The graph shown in Figure 2 is based on subjective listening tests. The subjective measurement is based on an average listener in a casual listening environment, such as a commuter drive in a normally quiet automobile. The lower, or 12dB, line represents the ratio below which the signal quality degrades noticeably. The upper, or 28dB, line is the ratio required for

critical listening, such as classical music in a quiet home. Again, these ratios were arrived at subjectively by a limited number of people using a limited number of receivers.

These ratios are based on the use of an amplifying booster, such as the old 10W variety, or a synchronous repeater, locked in both frequency and phase to the primary station.

The same listening tests suggest that the ratios must be increased by at least 6dB to achieve the same results if the booster

is not phase-locked. This is because of the presence of a discrete frequency heterodyne beat note or RF phase rotation at an audible rate.

This study resulted in a set of specifications for a client's booster system:

- A tailored, 3-dimensional antenna pattern providing a precise fit of the booster signal in the market cell.
- An effective radiated power providing a minimum of 12dB greater field from the booster than from the primary station.
- A booster transmitter that is phase-locked to the primary station signal to minimize the effects of mutual interference.

Construction

With the system described here, it was determined that an on-frequency amplifier at the booster site would be impractical. The required transmitter output of more than 200W into the specified antenna system would saturate the site. The resulting signal would be far too great to allow successful reception of the primary station. Such an on-frequency system would have become one large oscillator.

Even with much lower-powered, on-frequency amplifying boosters, it's usually difficult to maintain the required input-to-output isolation. In addition, maintenance of proper bandwidth is difficult because it is degraded by the inherent higher operating Q that accompanies regeneration.

For these reasons, a point several miles away was selected to receive the signal of the primary station. The signal is demodulated by a high-quality receiver and delivered as composite baseband to the input of a 950MHz intercity relay (ICR) transmitter. See Figure 3.

At the same location, a high Q passband cavity is used to ensure delivery of the primary station signal to the input of a downcounting system. The cavity severely attenuates signals from other stations.

The downcounter is a divide-by-N counter that produces a frequency within the subcarrier region of the ICR and is a submultiple of the primary station frequency. In this case, the primary station carrier was divided by 1,024 to generate a subcarrier of approximately 98.5kHz. Before the signal is applied to the ICR multiplexer input, it is highly filtered. This eliminates any harmonics that would cause out-of-band emission by the 950MHz transmitter.

Also, during the design phase, consideration was given to certain characteristics of the ICR equipment. Not all ICR equipment and exciters deviate in the same direction for a given polarity of audio input. The exciter used in this booster inverts the audio phase. In addition, because the output of the receiver at the relay

Continued on page 78

BALANCE YOUR BUDGET

McCurdy's affordable alternative to pricy audio distribution systems is the ADA-700.

Compact and self-contained, this 1 Rack Unit high (1 3/4") stereo component, with individually adjustable outputs, offers exceptional performance characteristics.

The ADA-700 can be configured as a stereo input with 8 stereo outputs, or as a single bridged monaural input with 16 individual outputs.

Other features include

a continuously variable -6 to +28 dB gain adjustment, isolated outputs and a quiet toroidal power transformer.

ONLY \$460

McCurdy

McCurdy Radio Industries

108 Carnforth Road, Toronto, Ontario
Canada M4A 2L4 Tel: (416) 751-6262
Telex: 06-953533 Telefax: (416) 751-6455
1051 Clinton St., Buffalo, New York 14206
Tel: (212) 772-0719

40
YEARS OF EXCELLENCE

Circle (38) on Reply Card

Downlink Double Feature

Upgrade with our new VDP-8400 frame store synchronizer or our field-proven VDP-8000.

Lock up and synchronize noisy satellite and microwave signals for uninterrupted operation with our two high-performance frame store synchronizers.

The new VDP-8400 has the same reliable front-end circuitry as the dependable VDP-8000. And both come with outstanding features to match. Like a processing amplifier to enhance picture quality even in the freeze mode. Clean "hot switching" of non-synchronous sources, and a line select that lets you observe individual lines of video on any waveform or picture monitor. What's more, a blackburst output allows you to use

each of these units as a stand-alone sync generator. Want more? How about a price that's thousands less than the competition.

What's really uplifting about our down-link duo is their freeze-field/frame storage capabilities. The VDP-8000 lets you store two different fields or one field continuously, without interruption of live video. While the powerful VDP-8400 gives you enhanced storage capability of up to four fields.

So if you want to be in total sync, check out the VDP-8400 and VDP-8000 at your Videotek dealer today.

Line Select lets you observe individual lines of video on any waveform or picture monitor.

Multi-storage capabilities.

Display field or frame.

Processing amplifier controls with presets for video gain, pedestal, chroma gain and chroma phase.

VIDEOTEK
VDP-8400

POWER

SYSTEM PHASE

H SC SC/H

PICTURE POSITION

H V

NORMAL BYPASS

STORE

FRAME A FRAME B FRAMES A&B

DISPLAY

FIELD 1-A FRAME A/B FRAMES A&B

VIDEO INPUT

VIDEO

CHROMA

PRESET

VIDEOTEK
VDP-8000

POWER

SYSTEM PHASE

H SC SC/H

PICTURE POSITION

H V

NORMAL BYPASS

STORE

FIELD-1 FIELD-2 FRAME

DISPLAY

FIELD-1 FIELD-2 FRAME



VIDEOTEK INC.
American-made technology.
And value.

243 Shoemaker Road, Pottstown,
Pennsylvania 19464 • (215) 327-2292
TWX 710-653-0125 • FAX (215) 327-9295

Circle (39) on Reply Card

WE'VE SEEN THE FUTURE AND IT FITS.

Just when broadcasters and professional users are shifting from one-inch and 3/4-inch video tape systems to 1/2-inch analog component video, along comes the specter of 19mm D2. First they made it smaller; now they want to make it bigger again.

When Panasonic set out to design Composite Digital recording systems, we had a big responsibility—to keep it small. Our customers have a right to expect their investment in 1/2-inch to be preserved. We know that a change in technology means more than a change in equipment; walls, racks, layouts, suites, vans and tape storage are all long-term investments that shouldn't have to be re-done every time there's a new chip on the block.

Panasonic's new Composite Digital system not only delivers superior multi-generation capability, long-term signal stability and unprecedented operating ease. It is designed to fit right where it should—into your existing facilities.

Panasonic's design philosophy is always to create products for the future with today clearly in

mind. Our editing recorders and systems work with all of today's existing standards for video, audio and control. When you're ready to convert your editing suite to Composite Digital video, Panasonic will fit in.

Panasonic cameras, from our new, all solid-state AK-450 to the new all-digital AQ-20 and AQ-10, are designed to slip transparently into the operators' experienced hands.



Today's mobile teleproduction requirements include everything from commercial production to fast-breaking news. That's why our system design is built around interchangeable components and true portability—and will remain so from today to digital to HDTV.

Here's the bottom line. Television in the 1990's demands technical advances and innovations—digital video and HDTV. But *your* demands are for systems that permit smarter, leaner operations. And that is why Panasonic's broadcast equipment, both for today and tomorrow, is designed to fit into your plant, your vision and your budget.

Panasonic
Broadcast Systems

Panasonic Broadcast Systems Company, One Panasonic Way, Secaucus, NJ 07094 (201) 348-7671

Panasonic Broadcast Systems Company Field Offices: (Northeast) Washington, DC (703) 759-6900, (Southeast) Norcross, GA (404) 925-6772, (Midwest) Arlington Heights, IL (312) 981-7325/(317) 852-3715, (Southwest) Fort Worth, TX (817) 685-1132, (Western) Cypress, CA (714) 373-7209, (Northwest) (408) 866-7974

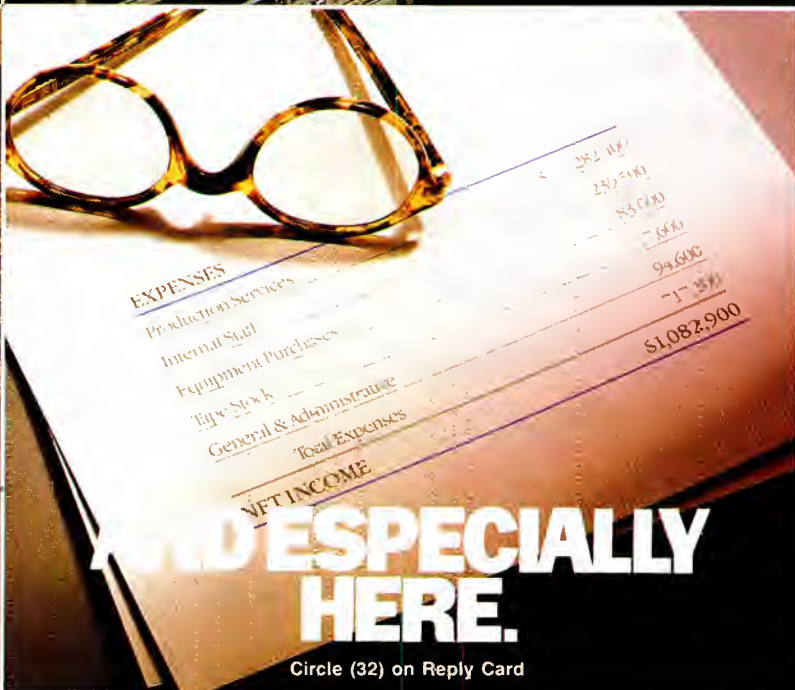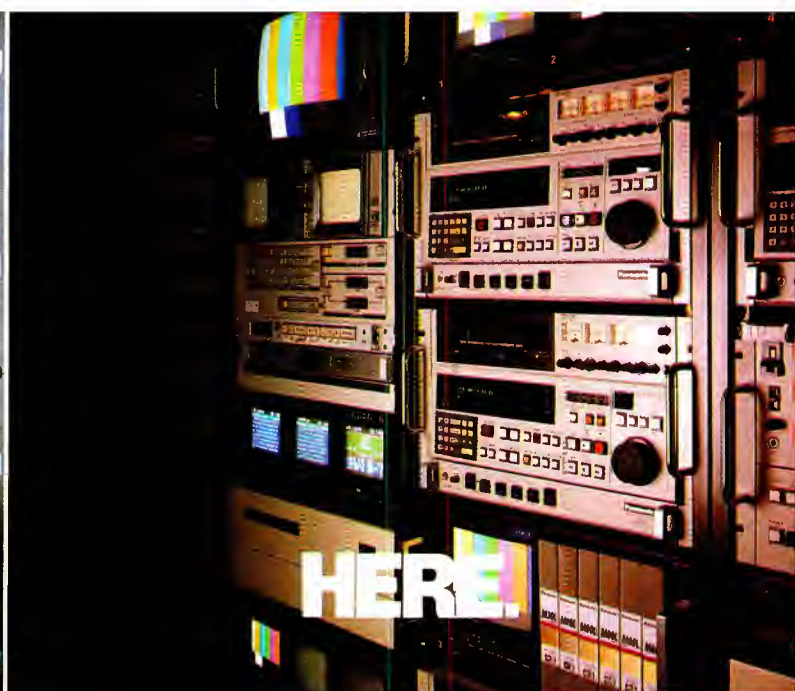

Circle (32) on Reply Card

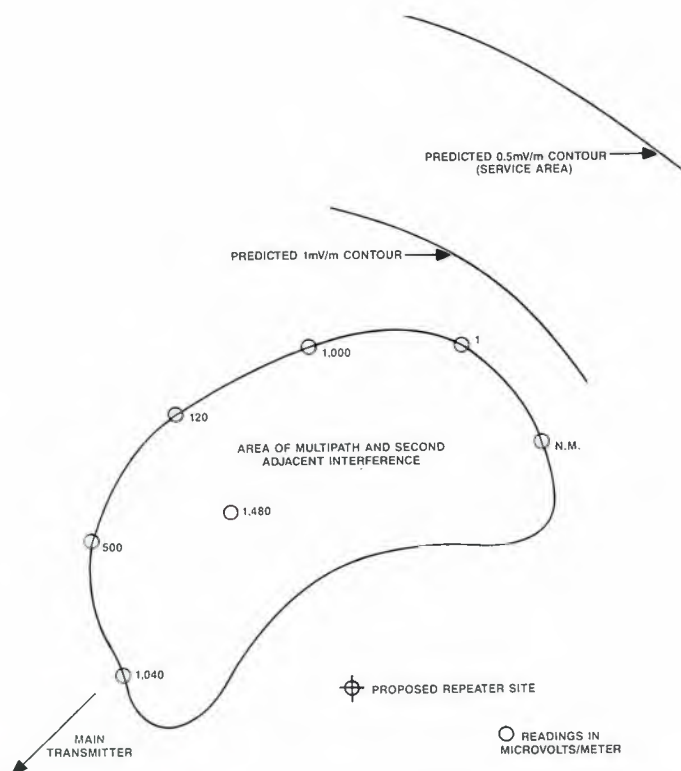


Figure 1. Contour map developed with field-strength measurements and interference checks. Carefully construct this type of map as your first step.

Continued from page 74

point was too low to drive the ICR transmitter, a phase-inverting distribution amplifier was installed between the receiver and the ICR transmitter.

Note that the design does not try to eliminate the phase-linear audio delays that are inherent in any booster system if the listener is not located equidistant from the two sources (in other words, where the mutual propagation time from the sources is equal). In this case, we are correcting for total phase reversal of the audio that would occur because of the booster. These inversions then would be detected as a phase error by a receiver's phase-locked loop circuitry.

This example system consists of a 950MHz signal modulated by composite audio baseband (with the appropriate phase) and a reference subcarrier. Both are transmitted to the booster site where they are demodulated by a standard ICR receiver. The composite baseband is delivered to the booster's input. The reference subcarrier is taken from the multiplexer output of the ICR receiver and directed to a phase-locked loop.

A downcounter, similar to the one at the relay point, is used to derive a frequency from the output of the booster. This sig-

Y/C Switcher, Still Store, ... and More!

**450
Line
Resolution**

**Over 50
Video
Effects**

**Dual
Channel
Freeze**

**A/B Roll
Video
System**

**Dual
Channel
Y/C TBCs**

Produce A/B Roll with the power of Still Store.

Keep 200 to 2,000* images on line for instant recall with ALTA's **Centaurus** and take full advantage of **Super VHS** resolution. Use wideband Y/C video processing from input to output. Even mix and match composite and Y/C signals.

Create over 50 video effects. Wipes, pushes, pulls, splits, dissolves, split screens, fades, posterizations, strobos and freeze frames. Even stereo audio mixing and keying. All with full bandwidth, 8-bit encoding and a comprehensive two year warranty.

Produce high resolution A/B roll video with the power of **Centaurus** for \$13,900. Or \$16,900 with Still Store. Find out more today!

* With optional drive.



**ALTA
GROUP, INC**

535 Race St.
San Jose, CA 95126
Telex 757994
Fax 408-297-1206
Tel 408-297-ALTA

Circle (30) on Reply Card

FLEXWELL

Over thirty years of large capability RF transmission line installations proven world wide.



In the early 1950's we developed the world's first semi-flexible RF coaxial cables with a revolutionary new technique of seam welded corrugated construction. This new type of cable fabrication offered not only flexibility, strength and improved electrical benefits but also considerable advantages in the transportation and installation of long runs of RF transmission lines. By 1961 we again were the first with the development and manufacture of corrugated elliptical waveguide. Today seam welded corrugated RF transmission lines are known by the trade name *Flexwell* and are

produced and marketed worldwide by member companies of the international Radio Frequency Systems Group.

For more information on the *Flexwell* family of RF transmission lines, contact Cablewave Systems division of Radio Frequency Systems Inc. North America. 60 Dodge Avenue, North Haven, CT 06473 • (203) 239-3311.



Cablewave Systems

Circle (40) on Reply Card

www.americanradiohistory.com

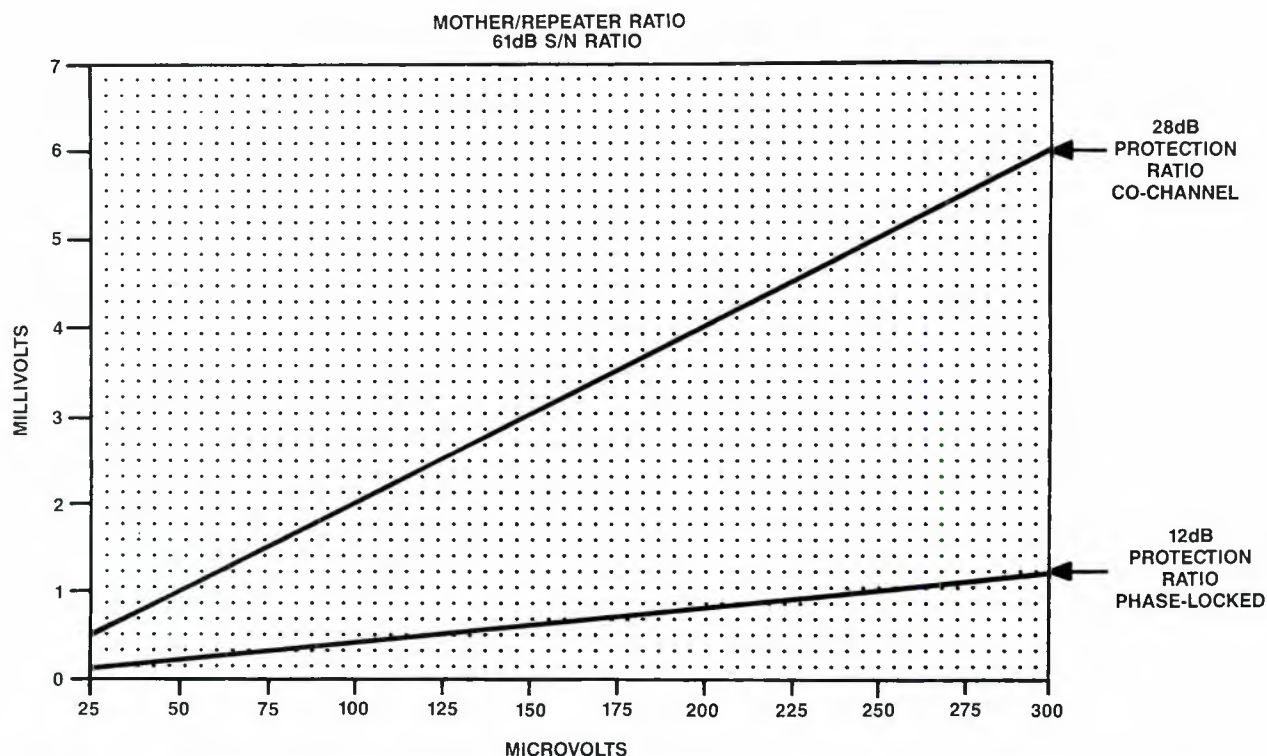


Figure 2. The ratio in primary-to-booster signal strength determines the overall listening signal quality. A greater protection ratio is required for some types of programming.

The art of shaping sound.

SONEX is a high-performance acoustical foam that upgrades your studio inexpensively. Ideal for a temporary isolation booth, it can also eliminate slap echo and harsh resonances in the main room or silence noisy tape equipment in the control booth.


Write for our color brochure today.



Alpha Audio Acoustics

2049 West Broad Street
Richmond, Virginia 23220 USA
(804) 358-3852 FAX: (804) 358-9496

Acoustic Products for the Audio Industry

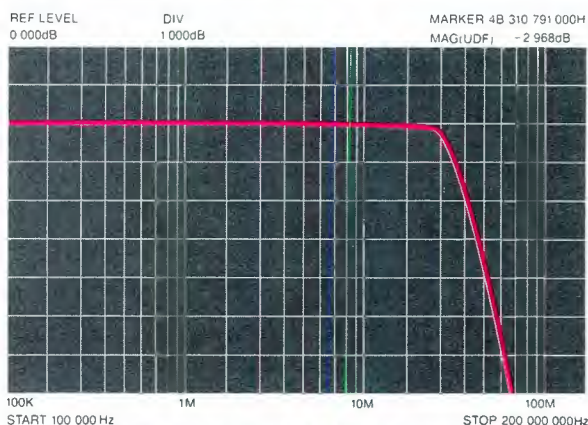

AVITEL. THE BEST LINE IN THE BUSINESS.

Avitel introduces a new high performance, modular line of equalizing Video Distribution Amplifiers. Utilizing extensive hybrid-SMD technology, Avitel is setting the standard for VDAs with an impressive list of features which include: ■ integral 3dB cable equalization, ■ 7 matched 75ohm outputs per DA, ■ differential looping input, ■ 13 modules per frame, ■ front panel controls for gain and equalization. In addition, the Avitel DA has the following plug in, user installed module options: ■ variable clamp, ■ user adjustable video delay, ■ extended cable equalizer, ■ DARTbus sync signal monitoring, ■ dual power supplies, ■ 30 MHz HDTV bandwidth. But that's not all. Avitel, with over 10 years of worldwide product leadership, has put a highly competitive price tag on each of their new DA's. Now that's a line too good to resist.



AVITEL ELECTRONICS CORPORATION 3678 W. 2100 S., SALT LAKE CITY, UTAH 84120, (801) 977-9553

Winsted®

VIDEO CONSOLES

WINSTED CONSOLES are designed for complete compatibility with your electronics, your facility, your requirements, and your decor.

A WIDE RANGE of editing and production models accommodate virtually every major brand of electronics. Modular components let you create consoles to match your rack mounted VTRs and controllers.

CORNER CONSOLES with wrap-around design let you utilize space efficiently. And attractive wood trimmed consoles let you match your studio decor. You can expand your system as needed with versatile add-on components.

ONLY WINSTED offers such a complete line of consoles, compatible with your requirements.

All Winsted Consoles Feature:

- Sturdy, heavy-duty steel construction
- Adjustability to fit your needs
- Easy access for maintenance and installation
- Ergonomic design for operator comfort
- Slope console models available
- Multiple bay models
- Free planning and design service

Write or call for *FREE* full line
catalog **1-800-447-2257**

(in MN call collect:
612-944-8556)

FAX: 612-944-1546



THE WINSTED CORPORATION

10901 Hampshire Avenue So.
Minneapolis, MN 55438

Preferred by Professionals Worldwide

Circle (43) on Reply Card

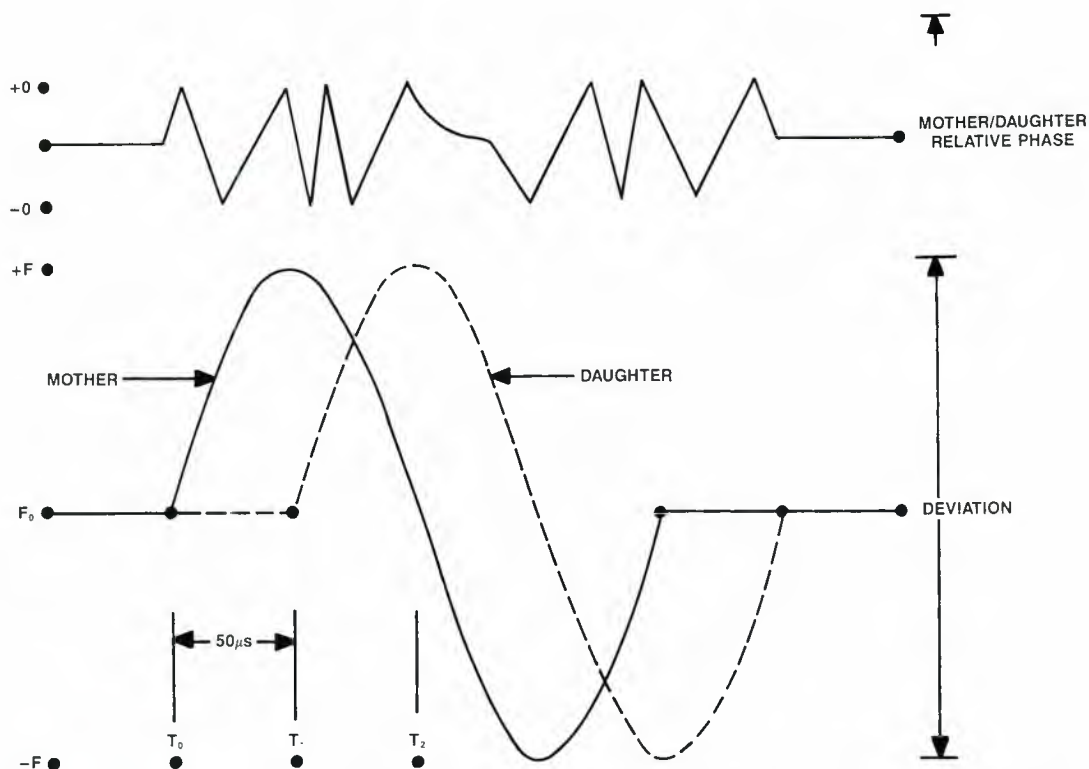


Figure 5. The lower sine waves represent the primary and booster modulation signals. Time is marked as T_0 , T_1 , T_2 . The propagation delay through the booster results in amplitude modulation within the receiver.



The choice of the professionals...



The Dynaphase 30MISR is a shoulder rest single cup headphone that provides the ultimate in convenience, comfort and superb sound quality. Made to rest on either your left or right shoulder, or shoulder rest can be detached and used as a single cup hand-held monitor.



310B PROFESSIONAL PHONO PREAMP/EQUALIZER
... Interfaces magnetic phono cartridges for optimum calibration of audio systems. Available with balanced or unbalanced output.



PBR ANNOUNCER'S EARPHONE ... Ideal for on camera studio work and remote coverage.

Stanton is the company with a total commitment to quality and reliability—producing products for the Recording Industry, the Broadcast Industry and the Professionals in Audio.



STANTON
THE CHOICE OF THE PROFESSIONALS™

101 Sunnyside Blvd., Plainview, NY 11803



500AL ... For heavy duty on-the-air use with wide tracking force range.



680EL ... Delivers sound excellence and stands up to backcueing, vibrations and mishandling.

Circle (49) on Reply Card



THE WORLD'S MOST SUCCESSFUL TELEVISION FAMILY

You've seen it for yourself. Many of the world's favorite television programs have been produced, edited, or broadcast on Ampex tape. From our industry standard 196 1" master broadcast video-

tape to our state-of-the-art 319 D-2 and Betacam SP metal-particle videocassettes, you get the same high quality consistently, tape after tape, carton after carton. Because every tape is manufactured to the same exacting specifications by the same experienced technicians in the

same ultraclean plant. No wonder more demanding professionals demand more Ampex tape. It's a television success story... all around the world.

AMPEX
THE PROFESSIONAL CHOICE

Ampex Recording Media Corporation
401 Broadway, Redwood City,
CA 94063, (415) 367-3809

Modulation noise sets the practical limit on how close to equal the primary and booster may be in signal strength while still being listenable.

With single-tone modulation, this noise manifests itself as a second, single tone. With normal program material, containing components of many frequencies, the number of intermodulation products of these frequencies rapidly approaches infinity. The result approximates the sound of de-emphasized white noise.

To explain its cause, let's construct a model. An example situation is that of a receiver located in a station's service area where it receives equal-strength signals from both the primary station and the booster.

You can assume that the distance to the receiver from the primary station is less than the distance from the primary station to the booster. Also assume that no modulation is occurring and that the frequen-

cies of the primary and the booster are the same and phase-locked.

The receiver will respond to the two signals as if they are the same and will recognize the vector sum as the signal strength. Under these conditions, no noise will be generated if the strength is adequate for receiver quieting.

Now, for the sake of example, apply a modulating signal of 5,000Hz at T_0 (see Figure 5). Assume that the propagation time through the booster to the receiver equals the first 90° of a 5,000Hz tone (50 μ s) and the propagation time to the receiver from the primary station is virtually nil.

During the first 90° of modulation, the primary station's frequency will deviate in a given direction while the booster's frequency will remain constant until T_1 (as perceived by the receiver).

During the next and succeeding 90° of modulation, the primary station will re-

verse its deviation direction. At the same time, the booster's frequency begins to deviate in the original direction taken by the primary station for 90° until T_2 . Then the booster also reverses deviation direction.

Thus, the relative RF phase of the two signals will rotate, creating a large amount of apparent amplitude modulation. It will be impossible for the receiver's limiter and detector stages to mask this effect. The illustrated phase waveform in Figure 5 is only an example. The actual result is a function of the modulation index.

The various functions within the system also are non-linear. Therefore, with a multitude of modulating frequencies, all possible in-band IM products will be generated in the various receiver circuits. The result is modulation noise.

Antenna system

In light of this, an antenna system was designed for the station. The antenna creates the smallest possible area of equal signal strengths, as opposed to a system that would create the largest possible coverage area.

The antenna system's pattern, shown in Figure 6, is unusual, even as a directional array. It directs a deep null at the horizon while directing its maximum radiation at a slight depression angle into the market cell. Meanwhile, the horizontal radiation pattern rises in the vertical plane to the horizon as the azimuth becomes off-axis from the array maximum.

This 3-dimensional pattern was achieved through the use of two vertically stacked yagi antennas at a 4.06-wavelength spacing combined with a 7° mechanical beam tilt and skewed 60°.

Design carefully

Every booster system can be configured in several ways, and each market problem requires a different coverage pattern. Also keep in mind that the potential for causing more harm than good with a booster always exists. Fortunately, the potential for dramatic improvement also exists.

The key is to approach each installation as a unique engineering challenge. Consider all factors, and design each system from scratch. Begin the process from a market cost standpoint. Proceed through hardware selection, and end with an uncompromising antenna design. When it is completed, treat the system with the utmost care and maintain it diligently to ensure continued successful operation.

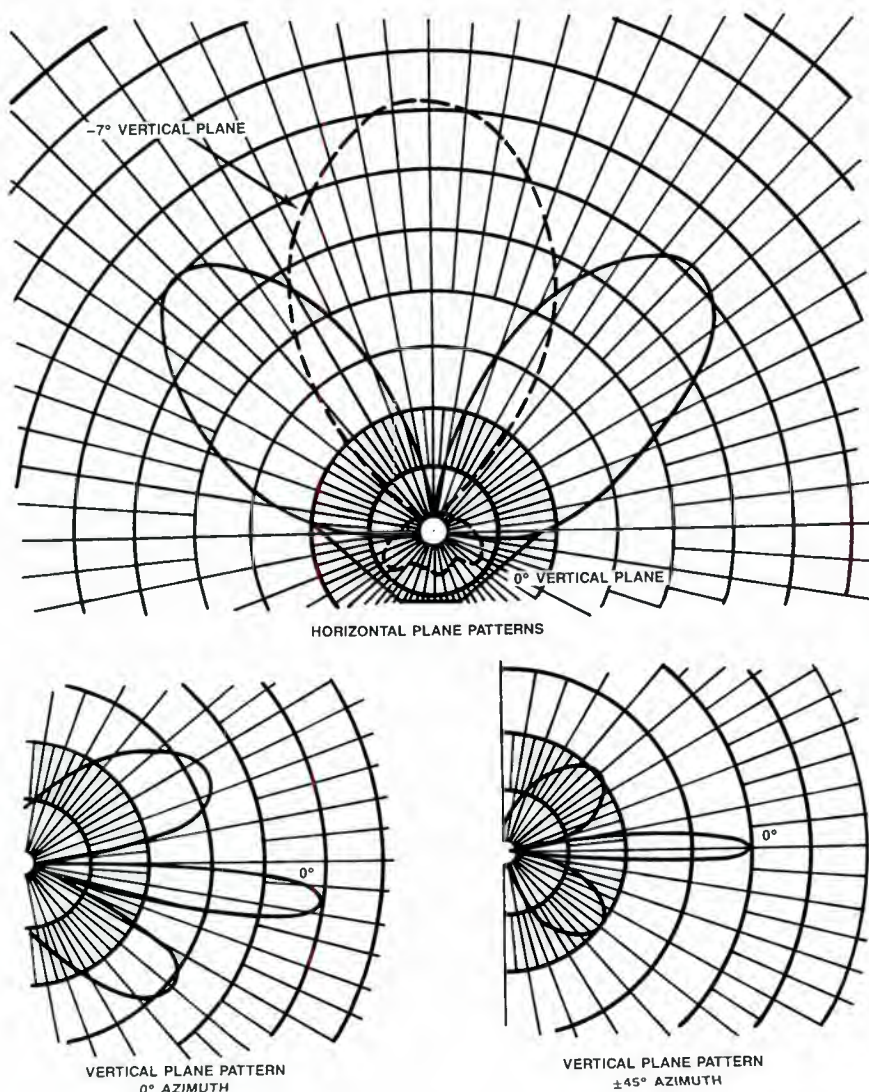


Figure 6. The example installation relies on a sophisticated transmitting antenna. The text describes the antenna's characteristics.

1:1=)))



No dropouts in Russia.

Tape dropouts mean trouble for videotape professionals. No wonder so many of them choose to work with Sony Professional Videotape. Including the producers of two recent documentaries shot in Russia, who minimized dropouts by shooting with Sony Videocassettes.

Sony cassettes were never at a loss for picture, whether covering sub-zero, Northern Russia nights or getting impromptu interviews with people on the street in Moscow.

Not that this surprises those of us at Sony Professional Videotape. After all, we've designed all our products around one basic premise: durability. To be frank, the demanding shooting conditions of Russia aren't as tough on our tape as we are.



XBR U-matic® cassettes, for instance, feature a molded-in anti-static cassette shell and components to reduce transient dropout potential by neutralizing static charges. Combine this with base film that's been given Sony's exclusive Carbonmirror™ back coating and dropout potential is reduced even further.

No matter which Sony Professional Videotape you're working with, there's one thing you know for sure. Its greatest ability is durability. Whether it's U-matic, Betacam,® 1" or Digital tape. So take on the world. With Sony Videotape. On location in Moscow, Russia, or in a studio in Moscow, Idaho, you need a tape that's tough as Sony. After all, there's no better way to lower the dropout rate.

SONY
THE ONE AND ONLY.

Receive a FREE Sony VHS headcleaner when you buy 10 Premier Grade Pro VHS videocassettes between May 1 and Oct. 31, 1989. See a participating Sony Tape dealer for details.

Show preview

5 Thursday
October 1989

TO KANSAS CITY
FOR SBE!

Thursday, October 5

Don't miss the anniversary party

By Brad Dick,
radio technical editor

Kansas City, MO, will play host to the 1989 SBE national convention Oct. 5-9. Coupled with the society's 25th anniversary, it promises to be a festive affair.

Come for the learning

Everyone knows that the SBE/BE seminars are first class, and this year's line-up is no exception. Attendees will be treated to lively, interesting and informative presentations by experts from across the nation, who will discuss a range of topics, from the latest technology to methods of extending the life of current equipment.

The presentations are keyed to meeting the needs of today's engineers. If you're involved in the technical operation or management of a station, you need to be

at this convention. You'll learn more in the three days of sessions than you ever thought possible. You will leave Kansas City armed with practical, first-hand information to help make you a better engineer and your station more profitable. Come to K.C., and learn how to survive and prosper in the ever-changing world of broadcast engineering.

Every engineer wants to see the latest equipment, and manufacturers representing every type of hardware will be at the

show. The booths will be staffed with technical people. If you want to talk technical, this is the place to do it.

Don't pass up the chance to have your questions answered by the people who really know how the equipment operates. This is a hands-on show, and you'll never have a better opportunity to try before you buy (a good reason to bring your boss). Admission to the exhibition floor is free, but advance registration is suggested.

Stay for the fun

Who said engineering conventions have to be boring? This year's convention is designed to be both fun and educational. Besides, we have something to celebrate.

SBE National Convention and Broadcast Engineering Conference

Wednesday, Oct. 4:

- Ennes Engineering Workshops (all day)

Thursday, Oct. 5:

- 8 a.m.—9 a.m. SBE national membership meeting
- 9 a.m.—12:30 p.m. Morning Engineering Session: The Regulation Front
- 1:30 p.m.—6 p.m. Afternoon Engineering Session: Broadcast Technology
- 6 p.m.—8 p.m. Attendee reception in the exhibit hall
- 8 p.m.—10 p.m. Night Owl Session: Audio Processing

Friday, Oct. 6:

- 8 a.m.—10 a.m. Morning Radio/TV Engineering Sessions
- 10 a.m.—3 p.m. Exhibits
- 11 a.m.—1 p.m. Lunch with exhibitors (receive an SBE lab coat)
- 3 p.m.—6 p.m. Afternoon Radio/TV Engineering Sessions
- 6 p.m.—7 p.m. Ham Reception
- 7 p.m.—9 p.m. Night Owl Session: Engineer Licensing

Saturday, Oct. 7:

- 8 a.m.—10 a.m. Morning Radio/TV Engineering Sessions
- 10 a.m.—3 p.m. Exhibits
- 3 p.m.—6 p.m. Afternoon Radio/TV Engineering Sessions
- 6 p.m.—7 p.m. SBE Reception
- 7 p.m.—9 p.m. Dinner and State-of-the-Industry Address
- 9 p.m.—???? SBE 25th Anniversary Party

Sunday, Oct. 8:

- 9 a.m.—10 a.m. National Frequency Coordination Meeting
- 10 a.m.—noon Engineering Safety Workshop
- Noon Good-bye until next year!

WINNING

See Us
At SBE
Booth #548



COMBINATION

Distribution amps, at best, give you one or two inputs, up to eight outputs per channel

and everything is hard wired. If your signal routing requirements change, as they often do, you're in for a major re-wiring job.

Unlocking the Possibilities.

With eight inputs and twenty-eight outputs, our Routing Distribution Amplifier is light years ahead of the pack. Because any input, or combination of inputs, can be easily distributed to any output, or combination of outputs, the RDA is justifiably a winner.

But the advantages don't stop there. Changing signal

routing paths is simple. All you do is open the front panel, shift a few Berg jumpers and you're done. Level controls for each output are located adjacent to the selection jumpers.

Unequaled Audio Quality.

With a signal-to-noise ratio of 98dB below the clipping threshold, the RDA gives you exactly what you're looking for—transparency. Plus, the RDA's exclusive Optimum

Level Control ensures the best compromise between headroom and signal-to-noise ratio.

Coarse matching the input level with four position dip switches and fine tuning with trimmer adjustment is visually aided with bi-color LEDs. The green light tells you that the RDA is operating at optimum level and the red light shows you that maximum level has been reached.

One More Critical Input.

To find out more about the most versatile distribution amp in the business, route your input to your Gentner distributor or give us a call.



GENTNER
AUDIO PRODUCTS

1825 Research Way • Salt Lake City, UT 84119 • (801) 975-7200 • FAX (801) 977-0087

©1989-Gentner Electronics Corporation

Circle (50) on Reply Card

www.americanradiohistory.com

Schedule of Engineering Sessions

Oct. 5-8, 1989
Kansas City, MO

Thursday, Oct. 5

• Morning session: The Regulation Front

Session Coordinator: John Battison

- 7:30 a.m. No-host continental breakfast
- 8 a.m.
Paper #1.1 **Conference Opening and Welcome**
• Jack McKain, SBE President
• John Battison, Conference Chair
Keynote remarks to launch this year's convention, and the 25th anniversary celebration of SBE.
- 8:30 a.m.
Paper #1.2 **Telco: Friend or Foe?**
• Daniel Collins, Bell Communications Research
An assessment of the future for cooperation — or competition — between broadcasters and the local Bell operating companies.
- 9 a.m.
Paper #1.3 **The State of the Broadcast Industry**
• Wallace Johnson, Moffett, Larson and Johnson
Status report on how regulation is affecting the business of broadcasting.
- 9:30 a.m.
Paper #1.4 **NAB Looks Toward the Future**
• Mike Rau, NAB
Summary of work being done by the National Association of Broadcasters on behalf of radio and TV stations.
- 10 a.m.
Paper #1.5 **Moving Toward 1999: Broadcasting in the Next Decade**
• Jerry Whitaker, **Broadcast Engineering** magazine
A perspective on what the next 10 years may hold for radio and TV stations.
- 10:30 a.m.
Paper #1.6 **Communications Technology Roundtable**
• Mike Rau, NAB
• John Battison, SBE
• Jack McKain, SBE
• Wally Johnson, consultant
A free-for-all discussion of broadcasting today, and where it is likely to be heading tomorrow.
- Noon End of Morning Session

Lunch Break (food served outside lecture hall)

• Afternoon Session: Broadcast Technology

Session Coordinator: Brad Dick, technical editor, **Broadcast Engineering** magazine

- 1 p.m.
Paper #1.8 **Automation, Plain and Simple**
• H. Stalnaker, V.P. of engineering, KEZQ-FM, Little Rock, AR
Case history of a station's experience with automation — what went right, and what went wrong.
- 1:30 p.m.
Paper #1.9 **Using PCs in Broadcasting**
• Ben Evans, Evans Associates
How personal computers can improve productivity and reduce on-air errors at radio and TV stations.
- 2 p.m.
Paper #1.10 **Developing Computer-Aided DA Patterns on a PC**
• Dave Matthews, C.E., WMNI-AM, Columbus, OH
How to let your PC take the work out of computing directional antenna patterns.
- 2:30 p.m.
Paper #1.11 **Complementing EBS with a Direct Warning System**
• Troy Langhan, C.E., KQMJ-FM, Tulsa, OK
How one station improved the effectiveness of the emergency broadcast system in its service area.
- 3 p.m.
Paper #1.12 **Hardening Broadcast Facilities**
• Dave Fitzsimmons, CCDR Architects
Maintaining architectural integrity in broadcast facilities can keep you on the air when disaster strikes.



Canon is proud to introduce a lens designed to perform flawlessly in a wide range of broadcast applications, whether in the field or in the studio. And despite the J15X9.5B IRS' compact size, it boasts a long list of impressive features. Like a powerful 15X zoom with built-in 2X extender and macro focusing as close as half-an-inch. And full compatibility with all $\frac{2}{3}$ " CCD cameras. Yet this incredible lens is affordable too, making it the perfect choice for any size TV station, the educational marketplace and everyone else in between.

However, the new J15X9.5B IRS can

Canon

do more. An optional positional focus control system and a zoom shot box allow you to customize the lens to specific broadcasting requirements. And like every Canon broadcast television lens, the J15X9.5B IRS provides years of dependable service thanks to superior optical and mechanical design and construction. When you need a lens of uncompromising performance at an affordable price, it has to be the Canon J15X9.5B IRS. (A high performance version of the J15, the J15X9.5IRS-HP, is available and features a rugged, rain-proof drive unit.)



SPECIFICATIONS:

Focal Length: 9.5-143mm (19-286mm w/2X extender)
Max. Relative Aperture: 1:1.8
(9.5-121mm),
1:3.6 (19-242mm)
Angular Field of View: 49.7° at 9.5mm,
26.1° at 19mm,
3.5° at 143mm,
1.8° at 286mm
Minimum Object Distance: .95 meters

AFFORDABLE HIGH PERFORMANCE FROM CANON.

Circle (51) on Reply Card

Canon USA, Inc., New York Office: One Jericho Plaza, Jericho, NY 11753 (516) 933-6300. Dallas Office: 3200 Regent Blvd., Irving, TX 75063 (214) 830-9600.
Chicago Office: 100 Park Blvd., Itasca, IL 60143 (312) 250-6200. West Coast Office: 123 Paularino Avenue East, Costa Mesa, CA 92626 (714) 979-6000.
Canon Canada, Inc., 6390 Dixie Road, Mississauga, Ontario L5T1P7, Canada (416) 678-2730

COME SEE US AT THE SMPTE SHOW, BOOTH 1326

www.americanradiohistory.com

3:30 p.m.
Paper #1.13

FCC Roundtable

- Coordinator: John Battison
- Keith Larson, FCC
- Robert Greenberg, FCC
- John Sadler, FCC

Your opportunity to fire questions at the FCC, and get straight answers.

5 p.m.

End of Afternoon Session

5 p.m.-6 p.m.

SBE Membership Meeting

***** 6 p.m.-8 p.m. — Attendee Reception in Exhibit Hall *****

• **Night Owl Session: Audio Processing**

Session Coordinator: Andy Laird, KDAY-AM, Los Angeles

8 p.m.
Paper #1.13

Audio-Processing Panel Discussion

- John Bisset, Delta Electronics
- Other panel members to be selected

The always popular give-and-take session on what's good and what's bad about audio processing.

10 p.m.

Close of session

Friday, Oct. 6

• **Morning Radio Session: New Technology for Radio, Part 1**

Session Coordinator: John Battison

7:30 a.m.

No-host continental breakfast

8 a.m.
Paper #2.1

Noise-Free Radio: A New Concept

- George Yazell, consultant
- A new approach to AM broadcasting using FM.*

8:30 a.m.
Paper #2.2

FMX Status Report

- Tom Keller, Broadcast Technology Partners
- An update on FMX and receiver blending.*

9 a.m.
Paper #2.3

AM and FM Boosters, Translators and Slave Stations

- Ralph Evans, consulting engineer
- How to increase the coverage of your station, and stay within the FCC's rules.*

9:30 a.m.
Paper #2.4

The Status of NRSC-FM

- John Bissett, Delta Electronics
- A report updating the work of the NRSC-FM subcommittee.*

10 a.m.

Close of session

• **Morning Television Session: Advanced Television Systems**

Session Coordinator: Ned Soseman, editor, Video Systems magazine

7:30 a.m.

No-host continental breakfast

8 a.m.
Paper #2.5

HDTV Status Report

- Ben Crutchfield, ATTC
- The status of HDTV and ATV technologies, new products and new ideas.*

8:30 a.m.
Paper #2.6

Testing Advanced TV Systems

- Charles Rhodes, ATTC (tentative)
- A report on how the competing ATV systems are being tested and compared.*

9 a.m.
Paper #2.7

HDTV Standards: Is There Any Hope?

- John Seazholtz, Bell Atlantic
- A review of current proposed standards and standardization trends.*

9:30 a.m.
Paper #2.8

Competing With Cable and the Phone Company

- Steven Bonica, NBC
- Observations on the role competitive organizations might take in the delivery of HDTV programming to the home.*

10 a.m.

Close of session

The Aphex Audiophile Air Chain



"FM radio has become a ratings war in which we are the casualties by being subjected to a poor excuse for clean, accurate music."

Thomas J. Koch, *The Audiophile-File*

KTWV-FM The Wave. WHYI Miami-Ft. Lauderdale Top 40's. KKKO America's Jazz Station. WQXR New York's Premier Classical Station. All different, but all winners, because they have an overriding demand to deliver the best in audio quality. They know quality sound is essential to attract and keep loyal listeners.

That's why these premier stations rely on The Aphex Audiophile Air Chain, a combination of the Aphex

Compellor®, Aural Exciter® and Dominator™ to achieve *consistent high quality sound*. Quick and easy to set up, this combination will achieve competitive loudness while maintaining the same high quality regardless of program or who is controlling the board. By comparison, other processors need to be tuned for almost every song, and achieve loudness by homogenizing or crunching to the point of pain.

AM, FM, TV or Cable ... rock to Bach or talk, if you want to be a winner in the "no win modulation wars", contact your Aphex dealer to arrange for a demo of the Aphex Audiophile Air Chain.

APHEX
SYSTEMS

11068 Randall St.
Sun Valley, CA 91352
(818) 767-2929

All Aphex products are designed and manufactured in the U.S.A.
© 1989 Aphex Systems

Circle (53) on Reply Card

***** 10 a.m.-3 p.m. — Exhibit floor open *****
(Walk-around lunch and SBE lab coat with paid admission)

10 a.m. Chapter Chairmen Meeting

11 a.m. Meeting ends

• **Afternoon Radio Session: New Technology for Radio, Part 2**

Session Coordinator: Brad Dick, technical editor, **BE** magazine

3 p.m. **Solid-State Transmission Systems**
Paper #2.9

- Bob Weirather, Harris Corporation

New approaches to tie use of semiconductors in high-power radio transmitters.

3:30 p.m. **High-Fidelity 76kHz SCA**
Paper #2.10

- Tim McCartney, D.E., KBSU-FM, Boise, ID

How to accomplish the improbable.

4 p.m. **Do You Know Where Your Signal is Going?**
Paper #2.11

- Bob Richards, Dataworld

The ins and outs of station coverage.

4:30 p.m. **New FM Processing Methods**
Paper #2.12

- Robert Greenberg, FCC

How the FCC plans to speed up the processing of FM applications.

5 p.m. **Stump the Experts**
Paper #2.13

- Chairman: Mike Patton, Patton Circuit Systems
- Carl Lahm, P.E., consulting engineer
- Dave Chenoweth, Continental Electronics
- Additional panelists to be selected

Let this panel of experts solve your toughest operating problems.

6 p.m. Close of session

• **Afternoon Television Session: Digital Technology**

Session Coordinator: Rick Lehtinen, technical editor, **BE** magazine

3 p.m. **Digital Recording Technology: An Overview**
Paper #2.14

- Presenter to be named

The principles behind the D-1, D-2 and digital HDTV systems.

3:30 p.m. **Digital Graphics Systems**
Paper #2.15

- Philip Malkin, Time Arts

How to use a local systems integrator to build your station's own computer graphics center from the ground up.

4 p.m. **Digital Format Conversion**
Paper #2.16

- Christian Tremblay, Central Dynamics

Using current technology hardware to convert between digital formats.

4:30 p.m. **High-Speed Digital Communications**
Paper #2.17

- Gerry Kaufhold, SGS-Thomson Microelectronics

How tomorrow's equipment will pick up the pace for digital data transmission.

5 p.m. **Finding the Teletext Niche**
Paper #2.18

- Dave Webb, KSL-TV News

Teletext is here, but how can we use it?

5:30 p.m. **Using Super-Power Isolators in the Broadcast Plant**
Paper #2.19

- James Stenberg, Micro Communications

How super-power isolators work, and the performance benefits they can provide.

6 p.m. Close of session

6 p.m.-7 p.m. Ham Radio Reception

• **Night Owl Session: Engineer Licensing**

Panel discussion coordinator: Chris Imlay



20 gets you 40. 40 inputs plus 8 subs for tracking, overdubbing or mix down means flexibility and control without re-patching at every step. Thanks to the flexibility of the WR-T820B, you can use the monitor section during mixdown to gain 20 extra inputs—over and above the WR-T820B's 20 input modules. So 20 really does get you 40!

The WR-T820B's performance and construction quality are every bit as remarkable as its design. Premium, high-speed IC's in the gain stages give it an open sound that does full justice to all those incoming signals. And our faders are rated at 300,000 operations—20 times the life of a typical carbon fader. Just *two* examples of RAMSA's integrity in design and component selection.

See your RAMSA dealer for a complete demo. Or contact us for further information at: 6550 Katella Ave., Cypress, CA 90630, (714) 373-7278.

RAMSA

Panasonic
Industrial Company

Circle (54) on Reply Card

Paper #2.20

- Bob Van Buhler, SBE
 - Dane Erickson, Hammett & Edison
 - Other panelists to be selected
- A gloves-off look at the hot question of licensing broadcast engineers.*

9 p.m.

Close of session

Saturday, Oct. 7

• **Morning Radio Session: Radio Transmission**

Session Coordinator: Wayne Woollard, KDON-AM/FM

7:30 a.m.

No-host continental breakfast

8 a.m.

Paper #3.1

Transmission lines and waveguide

- Dane Erickson, Hammett & Edison
- Generating RF is only half the battle. You also have to get it to the antenna.*

8:30 a.m.

Paper #3.2

Dealing With Negative Towers

- Jerry Westberg, Westberg Consulting
- Taking the negatives out of negative towers.*

9 a.m.

Paper #3.3

Optimum Bandwidth for FM Transmission

- Ed Anthony, Broadcast Electronics
- How wide is wide enough?*

9:30 a.m.

Paper #3.4

Five- vs. Four-Pole Bandpass Filters for FM Combiners

- Bob Surette, Shively Labs
- A new look at FM power combiners.*

10 a.m.

Close of session

Little Noisemaker.



This little gray box is about to have a big effect on the way you test your audio equipment.

No longer will you have to bother with individual tones to set proper audio levels. With Delta's SNG-1 Stereo Noise Generator you can make a variety of tests with *true* stereo noise, all at the flip of a switch.

You'll get a much more realistic view of what your equipment is doing. Whether you prefer white, pink, or USASI noise spectra, the SNG-1 provides it, in both continuous and pulsed output modes.

Say goodbye to hit or miss processor adjustments using varying program material. The award-winning SNG-1 spans the entire frequency range, so you'll cover the highs, the lows, and everything in between.

The external gate input permits an infinite variety of pulse shapes and durations so you can test your equipment to the absolute

fullest. For standalone convenience simply switch to the internal pulse mode.

With the SNG-1 you'll always get an accurate and repeatable standard to base your measurements on. And for only \$495, there's no bigger value.

To discover how the Little Noisemaker can help you in a big way, call or write today. And be sure to ask for your free copy of Delta's Noise Primer, "Employ Some Noise." Delta Electronics, Inc., 5730 General Washington Drive, P.O. Box 11268, Alexandria, VA 22312. Phone: (703) 354-3350, FAX: (703) 354-0216, Telex: 90-1963.

The Above Standard
Industry Standard.

DELTA ELECTRONICS



©1989 Delta Electronics, Inc.

Circle (55) on Reply Card

The Neriki Image Master™ Genlock.

It works with the Amiga®.



Not

in it.


That has a lot of obvious advantages—no expansion slots are wasted, no added load on the power supply, and none of the keyboard commands that have to be used with internal genlocks.

But the real advantages are in performance. The Neriki Image Master meets NTSC broadcast standards. It encodes at 5.5 MHz and delivers full 500 line resolution. Even third generation tapes are broadcast quality. It works with any Amiga computer and all Amiga text, graphics, paint and animation software. It genlocks to any video source—studio reference,


black burst, camera, TBC, and any suitable video tape source in any format (including S-VHS) — and puts out high quality composite or R-G-B baseband video for flawless productions. It can be used up - or down-stream. And it gives you simple and instant front panel controls for Chroma Phase (coarse and fine), Effect Key, Enable, Key Invert, and Dissolve.

The Neriki Image Master is RS-170A approved and available now — with a full one-year limited warranty. More information is yours for the asking. Just call or write.

NEW—If you have to meet broadcast quality on a non-broadcast



budget, find out about the economical new Neriki DeskTop™ genlock.



TELMAK INC.
P.O. Box 54 Plainview, New York 11803
Phone 1-800-637-4540



Image Master™ and DeskTop™ are trademarks of Fordray Manufacturing Pty Ltd. Amiga® is a trademark of Commodore Electronics Limited.

Circle (56) on Reply Card

www.americanradiohistory.com

• **Morning Television Session: TV Transmission**

Session Coordinator: Ned Soseman, editor, *VS* magazine

7:30 a.m. Cash continental breakfast

8 a.m. **Advanced Klystron-Equipped Transmitters**

Paper #3.5

- Nat Ostroff, Comark

A status report on Klystron tube transmitter development.

8:30 a.m. **MSDC Klystron Progress Report**

Paper #3.6

- Earl McCune, Varian Associates

A status report on the multistage depressed collector klystron and its application in the field.

9 a.m. **Using Tetrodes for High-Power UHF**

Paper #3.7

- Dr. Timothy Hulick, Acrodyne

A report on the application of high-power UHF tetrodes in broadcast transmission equipment.

9:30 a.m. **Maintaining Solid-State VHF Transmitters**

Paper #3.8

- Gaylen Evans, Harris

New high-power semiconductor transmitters require a new approach to maintenance.

10 a.m. Close of session

***** 10 a.m.-3 p.m. — Exhibit floor open *****

(Lunch available for purchase on convention floor)

• **Afternoon Radio Session: Radio Technology**


Session Coordinator: John Battison

3 p.m. **RENG and the Cellular Telephone**

Paper #3.9

- Skip Pizzi, National Public Radio

Cellular telephones offer broadcasters a whole new world of opportunities.

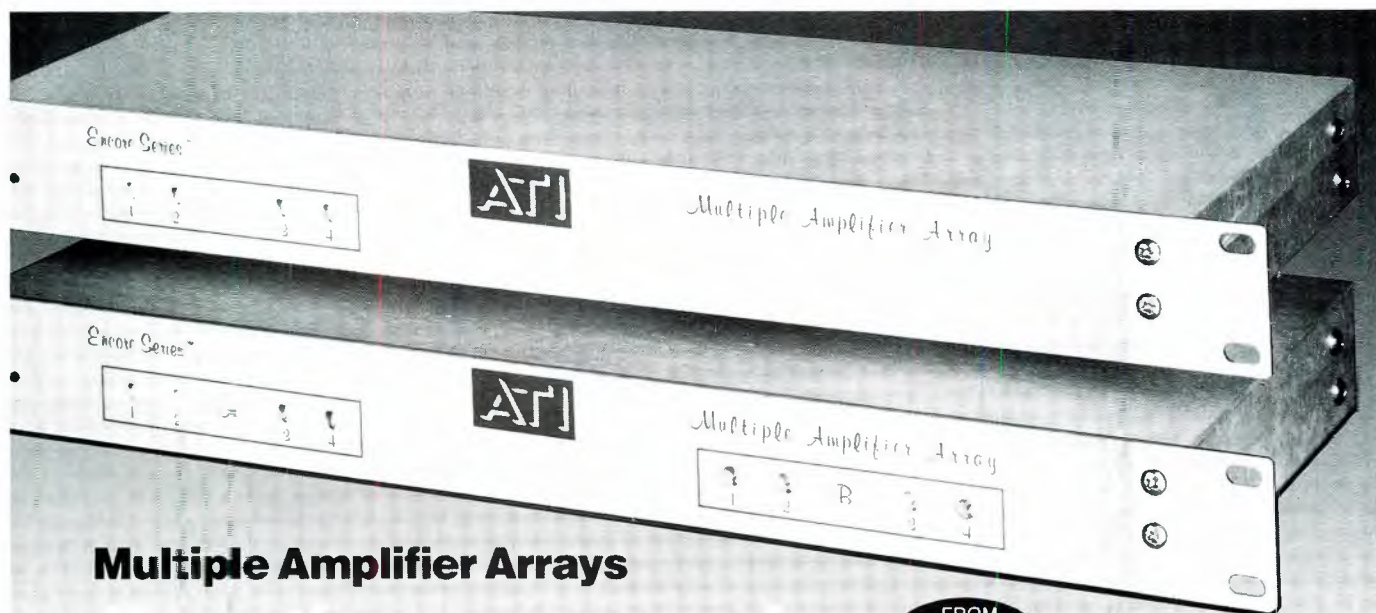

Multiple Amplifier Arrays

FROM
\$349

Four or eight channels for **YOU** to easily configure as Microphone, Line Buffer, Distribution and Level Matching Amplifiers. Form sum and difference networks, Interface phone lines, Drive headphones, Make a

simple Mixer or Press Box . . . just by changing jumpers.

Gains to 82dB, Low noise balanced inputs. Clean +24dBm active or transformer balanced outputs.

Configurable circuitry. . . to fit **your** needs.

Call or write for free detailed brochure.

AUDIO TECHNOLOGIES, INC.
328 W. Maple Ave., Horsham, PA 19044
(215) 443-0330 • FAX (215) 443-0394



Circle (57) on Reply Card

EEV's TOTAL COMMITMENT

... what's in it for you?

The most comprehensive range of wideband klystrons


Today's klystron technology available on established products

Emergency tubes and circuit assembly parts available ex-stock with no premium charges

Klystron Engineering Notes providing application guidance

Technical assistance available over the phone or on-site

An established support scheme already servicing more than 200 satisfied clients

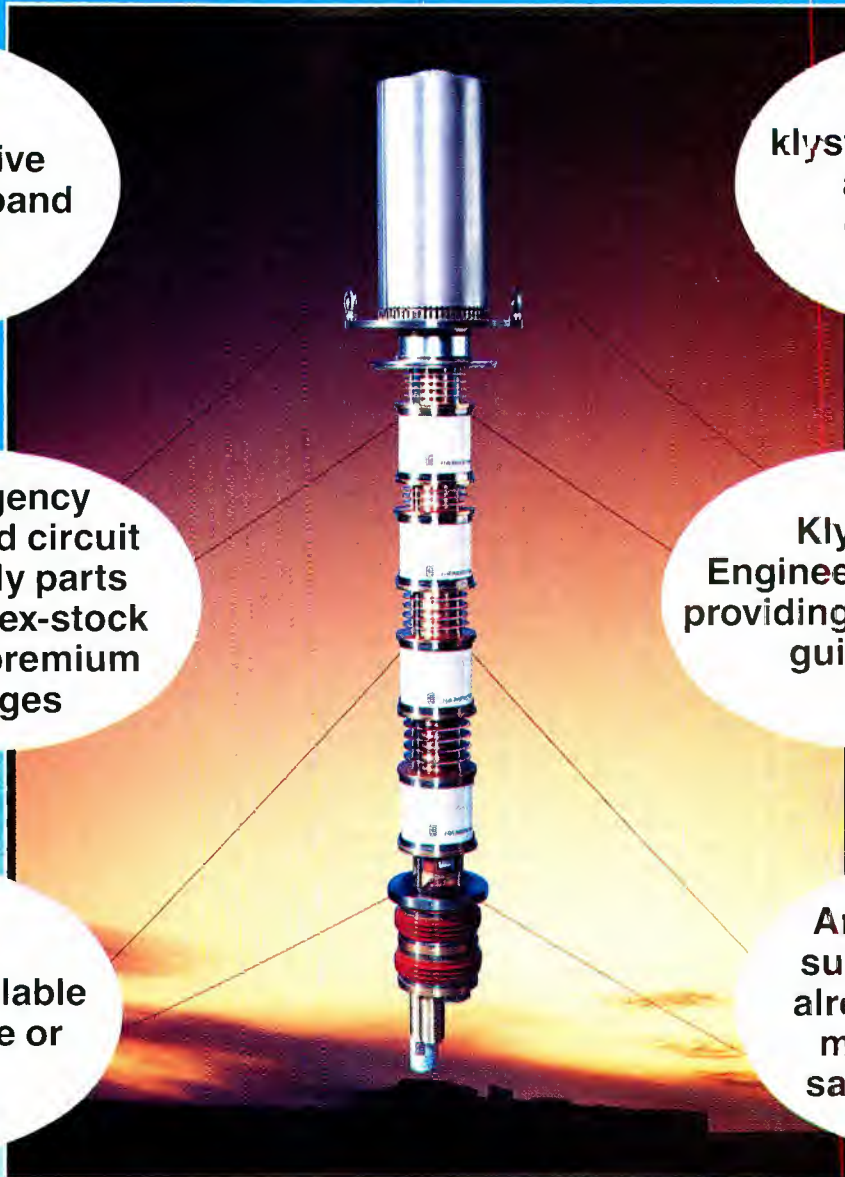

This adds up to the most cost effective package for you, the UHF TV Broadcaster.

***For more information please call:
1-800-DIAL-EEV***

EEV Klystrons

USA: EEV Inc, 4 Westchester Plaza, Elmsford, NY 10523 Telephone: (914) 592 6050 Telex: 6818096 Fax: (914) 682 8922

CANADA: EEV Canada Ltd, 67 Westmore Drive, Rexdale, Ontario M9V 3Y6 Telephone: (416) 745 9494 Telex: 06 989363 Fax: (416) 745 0618

UK: EEV, Freebournes Road, Witham, Essex CM8 3TS, England Telephone: (0376) 517101 Telex: 987935 Fax: (0376) 518170

Subsidiary of the General Electric Company plc of England **S&C**

Circle 158 on Reply Card
www.americanradiohistory.com

3:30 p.m.
Paper #3.10

4 p.m.
Paper #3.11

4:30 p.m.
Paper #3.12

5 p.m.
Paper #3.13

Using Computers to Manipulate Audio

- John Statner, Compusonics
The demise of razor-blade editing.

Computer-Based Digital Audio

- Greg Dean, Computer Concepts
The inside track on computerized audio.

The Shape of Things to Come

- Brad Naples, New England Digital
A glimpse of the broadcast media in 1995.

Digital Signal Processing

- Richard Cabot, Audio Precision
New technology offers new ways to solve old problems.

Plenty of music and conversation will be on tap at an attendee reception with the exhibitors on Thursday evening. On Friday, you'll be treated to lunch in the exhibit hall. Seminar attendees will receive a special SBE lab coat. You'll want one of the lab coats for use back at the station.

You only turn 25 once. And this is the year for the Society of Broadcast Engineers. The convention will mark the quarter-century point for the SBE, and the celebration may well be remembered for the next 25 years!

The festivities start with a reception for all members and their spouses. The informal gathering will provide an opportunity to renew acquaintances and catch up on the latest news in your market. The reception also will provide an opportunity to mingle with the pioneer members of SBE, the people who formed the society in 1964.

After the reception, join your colleagues, representatives from other professional organizations and our guest speaker for a formal dinner.

Following the official program, it's party time! Help the SBE mark 25 years of service to the broadcast industry, and have a good time, too. No anniversary party would be complete without presents. There will be something for everyone. Come and see what we have to mark the 25th birthday of the SBE. The grand prize will be a laptop computer. Winning is easy; just visit the various booths on the convention floor, and be present at the party. How can you miss?

Engineer designed

SBE knows that engineers sometimes have limited travel budgets. That's why the shows are always cost-effective. Special air fares are available from Creative Travel Consultants. You'll save a minimum of 40% off regular coach and an additional 5% off excursion fairs. Call 1-800-645-9860, and tell the operator you're with SBE. After 5 p.m. (CDT) and on weekends, call 1-800-645-9860. Your boss will enjoy the savings, and you'll enjoy the show.

When was the last time you got a discount on taxi fares from the airport to your hotel? Well, SBE thought of that too. Special discounts are available for members who make advance reservations. Call 1-800-221-9165 before 5 p.m.

Kansas City offers something for everyone. Attend the SBE national convention and **Broadcast Engineering** Conference, and make it a family event.



NEW AMPFET NO 5



NEW 5 KW SOLID STATE AM TRANSMITTER



- PROVEN SOLID STATE DESIGN
- 75% OVERALL EFFICIENCY
- 4 INDEPENDENT POWER BLOCKS
- BUILT-IN STANDBY EXCITER
- ON-AIR SERVICEABILITY
- NEW INDUSTRY STANDARD FOR SUPERIOR PERFORMANCE
- 125% POSITIVE PEAK CAPABILITY TO 5.6 kW
- ZERO LOW FREQUENCY PHASE SHIFT
- THE "PERFECT" TRANSMITTER FOR AM STEREO

MF Radio
400W TO 100,000W

AMPFET SERIES

TOTALLY
SOLID STATE

NAUTEL
(Nautical Electronic Laboratories Limited)
R.R. #1, Tantallon, Halifax County,
Nova Scotia, Canada B0J 3J0

Nautek Maine Inc.
201 Target Industrial Circle
Bangor, Maine 04401 U.S.A.

Phone (902) 823-2233
Telex: 019-22552

Phone (207) 947-8200
Telex: 944466



Auditronics 'because they work well and they're so easy to use'

"That's what I tell colleagues from other stations when they ask why I prefer Auditronics consoles," says Jon Book, Engineering Manager, Studio Systems for WOC-KIHK in Davenport, Iowa.

"We have about 15 people working the boards between our AM and FM operations so ease of use is very important to us. Our five Auditronics consoles in on-air and production let our people air a highly professional product on both our programming and the commercials we produce."

Call us now to find out more about why Jon Book buys Auditronics consoles for on-air and production, **toll free 800-638-0977**.



 **auditronics, inc.**

3750 Old Getwell Road, Memphis, TN 38118 • 901-362-1350

Circle (59) on Reply Card

- 5:30 p.m.
Paper #3.14 **Interfacing VHS Videocassettes for High-Quality Audio**
• Wayne Woollard, C.E., KDON-AM/FM, Salinas, CA
Using consumer video equipment to solve audio problems.
- 6 p.m. Close of session
- **Afternoon Television Session: Television Technology**
Session Coordinator: Rick Lehtinen, technical editor, **BE** magazine
- 3 p.m.
Paper #3.15 **Using Fiber Optics**
• F. David Harris, Purdue University
Fiber-optic technology promises to revolutionize broadcasting in general, and television in particular.
- 3:30 p.m.
Paper #3.16 **New Approaches to Small-Format Video Recording**
• Neil Neubert, JVC
Continued improvements in tape-recording technology offer users additional options for ENG work.
- 4 p.m.
Paper #3.17 **Future TV Transmission Technologies**
• Rick Lehtinen, **BE** magazine
New digital technologies are appearing that could drastically alter the way we send signals.
- 4:30 p.m.
Paper #3.18 **LTPV Has Arrived**
• Keith Larson, FCC
The status of low-power TV, and what the commission sees for the future.
- 5 p.m.
Paper #3.19 **Solutions for Unique TV Coverage Situations**
• Thomas O'Flaherty, Andrew Corporation
Difficult coverage requirements demand a fresh approach to antenna design.
- 5:30 p.m.
Paper #3.20 **Designing a Candelabra Tower System for a Secondary Market**
• Don Borchert, D.E., WIS-TV, Madison, WI
Designing an antenna/tower structure to meet some difficult requirements.
- 6 p.m. Close of session

***** 6 p.m.-9 p.m. — SBE reception/banquet with guest speaker *****
Followed by 25th anniversary SBE party at 9 p.m.

Sunday, Oct. 8, 1989

• **Morning Session: Frequency Coordination**


Session Coordinator: Richard Rudman

- 8:30 a.m. No-host continental breakfast
- 9 a.m.
Paper #4.1 **Frequency Coordination Update**
• Gerry Dalton, KKDA-AM, Grand Prairie, TX
• Richard Rudman, KFWB-AM, Los Angeles
The latest developments on frequency coordination, and how SBE members can help the effort.
- 10 a.m. Close of session
- **Engineering Safety Workshop**
Session Coordinator: Jerry Whitaker, editorial director, **BE** magazine
- 10 a.m.
Paper #4.2 **Safety in the Workplace**
• Kent Kroneman, KUED-TV, Salt Lake City
Safety is more than just a good idea, it's a must for every station.
- 10:30 a.m.
Paper #4.3 **RF Radiation Compliance**
• Milford Smith, Greater Media
How to be sure your station complies with the latest guidelines on electromagnetic radiation.
- 11 a.m.
Paper #4.4 **Transmitter Maintenance Safety**
• Marvin Born, D.E., WBNS-TV, Columbus, OH
How to keep your transmitter on the air, and keep yourself alive.
- 11:30 a.m.
Paper #4.5 **How to Handle PCBs**
• Christopher Holthaus, attorney
If you have an old transmitter, you probably will have to deal with PCBs.
- Noon **Good-bye until next year**
• John Battison, Session Chair


!:->)))



1

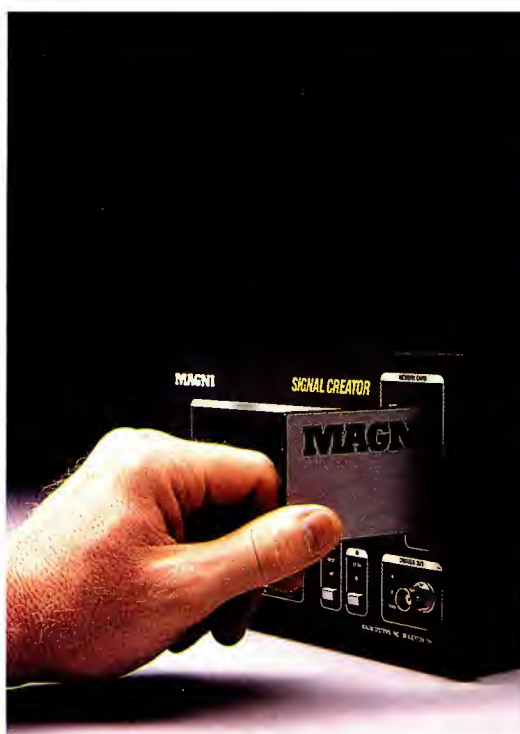

2

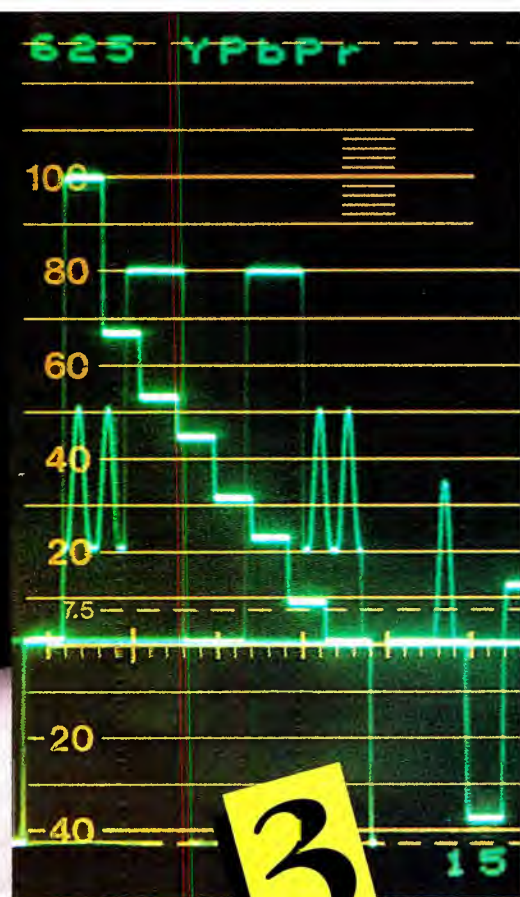

3

Figuring out what test signals you need to test all the video formats you use — that's the *easy* part. What's complicated is getting them where you need them to go. Who has room for two or three different signal generators for every rack of equipment?

MAGNI knows that space is as important to you as function. And the new Signal Creator™ brings you the best of both worlds: all the flexibility of a fixed-format/programmable generator in one go-anywhere package.

Inside the unit, precision hardware provides you

with full 10-bit digital signal generation. Outside Signal Creator™, signals are stored on a memory card that fits in your wallet. Testing NTSC equipment? Insert the card, and a full NTSC signal set is automatically downloaded and stored: just make your choice from the display menu. Need to switch to component signals? D1 or D2? PAL? Choose another



memory card, and the new format is there at your fingertips — you can even load Signal Creator™ with custom signals tailored to your needs.

No duplicate instruments or complicated programming: just multi-format testing where you need it, when you need it.

An idea that's as easy as...

MAGNI®

MAGNI SYSTEMS, INC.
9500 SW Gemini Drive
Beaverton, OR 97005 USA
(503) 626-8400
(800) 237-5964
FAX (503) 626-6225
TLX 650-2769743MCI

Magni is a registered trademark of Magni Systems, Inc. Magni Systems and Signal Creator are trademarks of Magni Systems, Inc.

SMPTE to be the season finale

By Rick Lehtinen,
TV technical editor

In the West Coast phase of its biennial flip-flop, the Society of Motion Picture and Television Engineers will convene its 131st technical conference and equipment exhibit in golden California. The Los Angeles convention center will host the conclave, slated for Oct. 21-25, just about the time the last bat has cracked in the World Series. SMPTE will be the last of the major-league equipment exhibitions until the NAB convention next spring.

All registrants are invited to the Welcoming Reception at the Academy Theater in Beverly Hills on Friday. Saturday morning, SMPTE president Maurice L. French will officially open the conference in the convention center hall (room 217-A). The keynote address then will be presented by J. Phillip Samper, Kodak. Stan Baron, NBC, will give the engineering report. The speakers will be introduced by program chairman John Baptista, CFI.

The honors and awards luncheon will take place on Saturday in the convention center's Petree Hall. The Fellows Luncheon is set for Monday, also in Petree Hall. The annual banquet is planned for Tuesday evening in the Westin Bonaventure Hotel, California Ballroom.


Equipment exhibition

As of press time, 230 companies have reserved booth space for the equipment exhibition, which will be set up in Yorty Hall. Attendees may visit the exhibit area, which will cover 79,000 square feet, during the following hours:

- *Saturday, Oct. 21:*
2:30 p.m. to 6 p.m.
- *Sunday, Oct. 22:*
10 a.m. to 6 p.m.
- *Monday, Oct. 23:*
9 a.m. to 7 p.m.
- *Tuesday, Oct. 24:*
9 a.m. to 5 p.m.

Technical program

The SMPTE technical program, which bears the theme "Technology and Tradition — Partners in Progress," will span five days. Program organizers have included special presentations, scattered throughout the conference, to commemorate the 100th anniversary of 35mm film and the

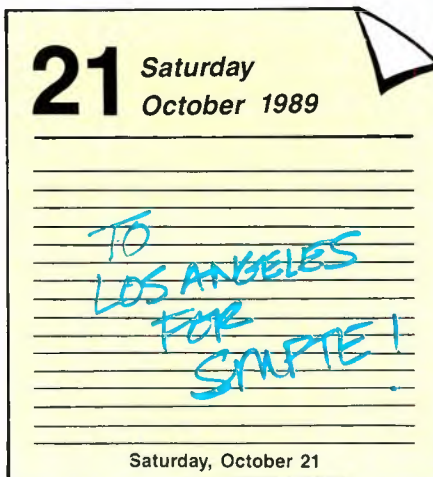

50th anniversary of television.

Two of the sessions will be held away from the convention center. Saturday's archival session will be held at UCLA, and Sunday's film production/presentation session will be held at USC. Shuttle service will be provided.

Season finale

Now that the Winter SMPTE Television Conference no longer includes an equipment exhibition, this fall's SMPTE will close out the trade show season for 1989. The next major opportunity to shop will be NAB 1990 in Atlanta at the end of March. Although the respite will give manufacturers and flat-footed editors a chance to regroup, there is a certain nostalgia in putting away the suitcases. This SMPTE will be, for many, one of the last rites of summer.

SMPTE program schedule

Saturday, Oct. 21:

Morning

- Opening session

Afternoon

- Session A:
Archival (at UCLA)
- Session B:
Advanced Television I
Transmission
- Session C:
Computer Interactive Video and Graphics

Sunday, Oct. 22:

Morning

- Session A:
Film Production
- Session B:
Advanced Television II
Transmission/Productions
- Session C:
Ancillary Services and Distribution Systems

Afternoon

- Session A:
Film Productions/Presentation (at USC)
- Session B:
Advanced Television III
Production Equipment
- Session C:
Quality Control and Measurement

Monday, Oct. 23:

Morning

- Session A:

Laboratory Technology

- Session B:
TV Production I
Equipment
- Session C:
TV Post-Production

Afternoon

- Session A:
Sound Technology I
- Session B:
TV Production II
Equipment
- Session C:
Recording

Tuesday, Oct. 24:

Morning

- Session A:
Film/Electronic Interface I
- Session B:
Encoding/Decoding for Composite Video and Techniques for Standards Conversion (with panel discussion)

Afternoon

- Session A:
Film/Electronic Interface II
- Session B:
Automation and Robotics
- Session C:

Wednesday, Oct. 25:


Morning

- Session A:
Digital Tutorial I
- Session B:
Television Sound Technology

Afternoon

- Session A:
Digital Tutorial II

1:2:3:4:5:6:7:8:9:10:11:12

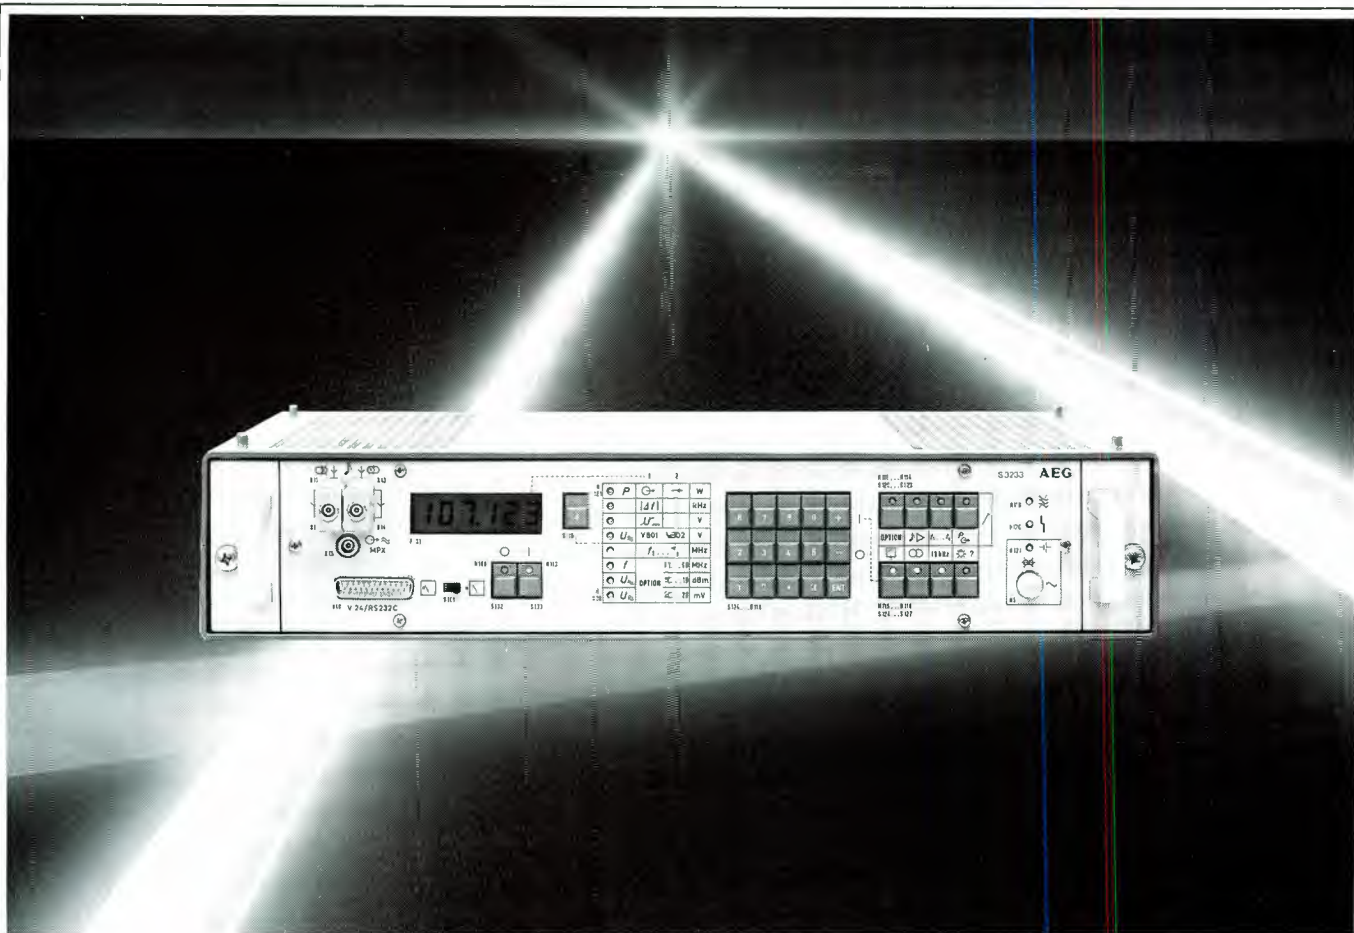

New 20 W synthesized FM transmitter

Hi-Fi quality with VHF/FM transmitters from AEG Olympia.

Radio listeners all over the world daily receive broadcasts from VHF/FM transmitters around the clock – hit parades, news spots, concerts, sports and a variety of other programmes to their entertainment – and this of superior Hi-Fi stereo quality.

For over 60 years AEG Olympia has been pacemaker in the development of VHF/FM transmitter-technology. Long standing experience in VHF/FM work has lead to professional equipment with outstanding performance. This established know-how and experience is to the benefit of national and commercial broadcasters and international telecommunications organizations. The fact that AEG Olympia has supplied more than 2,000 VHF/FM transmitters worldwide speaks for itself.

Fully solid-state modules with inherent redundancies give the user maintenance-free operation with minimum down-time. Automatic stand-by

facilities keep stations on air around the clock. The Radio-Data-System (RDS) as a novel service on VHF/FM is catered for: Supplementary information on optimum receiving conditions, station identification and traffic information to the listener.



Consistent to the concept of VHF/FM transmitters AEG Olympia supplies light and compact VHF antenna arrays proven to withstand the most adverse weather conditions, too. VHF/FM radio equipment is just one of the many

facets of the wide scope of products and services AEG Olympia can furnish to broadcasters.

Please contact us for detailed information on specific areas of interest.

Coupon

Please send me further information of VHF/FM transmitters:

Name: _____

Company: _____

Address: _____

AEG Olympia Office GmbH · Sickingenstrasse 20-28 · D-1000 Berlin 21 · (Federal Republic of Germany) · Telephone (30) 34 63-0 · Telex: 181819 · Telefax: (30) 34 63 24 19

AO.WAK 736 E

AEG

OLYMPIA

Audio-Technica AT4462 portable mixer

By Allan J. Stokes

Portable field mixers are often lumped into a common generic category in which characteristics and capabilities are assumed to be standard across the board. After all, how many features can you pack into a unit before it loses its status as a truly portable piece of gear? Quite a few, based on my experiences with Audio-Technica's model AT4462.

Particularly well-suited for ENG applications, the mixer offers mono and stereo capabilities that allow it to serve effectively as a remote audio section to any tape machine. Speaking of field use, a good way to begin this review is by looking at physical properties and dimensions.

The mixer weighs in at four pounds, 10 ounces and measures 8 3/8" x 7 3/8" x 3 5/16". It comes with a shoulder strap and

Stokes is president of Stokes Production Services, Hendersonville, TN.



Performance at a glance

- 4 x 2 portable mixer
- Frequency response: +1dB/-3dB, 20Hz to 20kHz
- Distortion: <0.1% THD (100Hz to 20kHz at +4dBm)
- Crosstalk: better than 65dB
- Built-in limiter
- Built-in Modu-Comm communications link
- VU metering with LED peak indication
- Three-frequency slate/oscillator
- Powering: Internal, two 9Vdc batteries
External, 12Vdc to 18Vdc, either polarity
Consumption, 82mA idle, 180mA maximum

Cordura/leatherette case. The mixer features an aluminum housing with rounded corners, and steel side flanges that extend beyond the front-panel controls for impact protection in this critical area. On top of the mixer is a silk-screened block diagram for a quick signal-path reference. The mixer is operable with a variety of power sources. Normally, it is powered by two 9Vdc alkaline batteries. An optional third battery can be used with the twin 9Vdc power supply to provide 12Vdc phantom microphone power. The unit also accepts external power of either polarity, from 12Vdc to 18Vdc or from an ac adapter.

Operating controls

The four input-level controls are located at the left of the control panel, stacked vertically in two rows. At the center of the

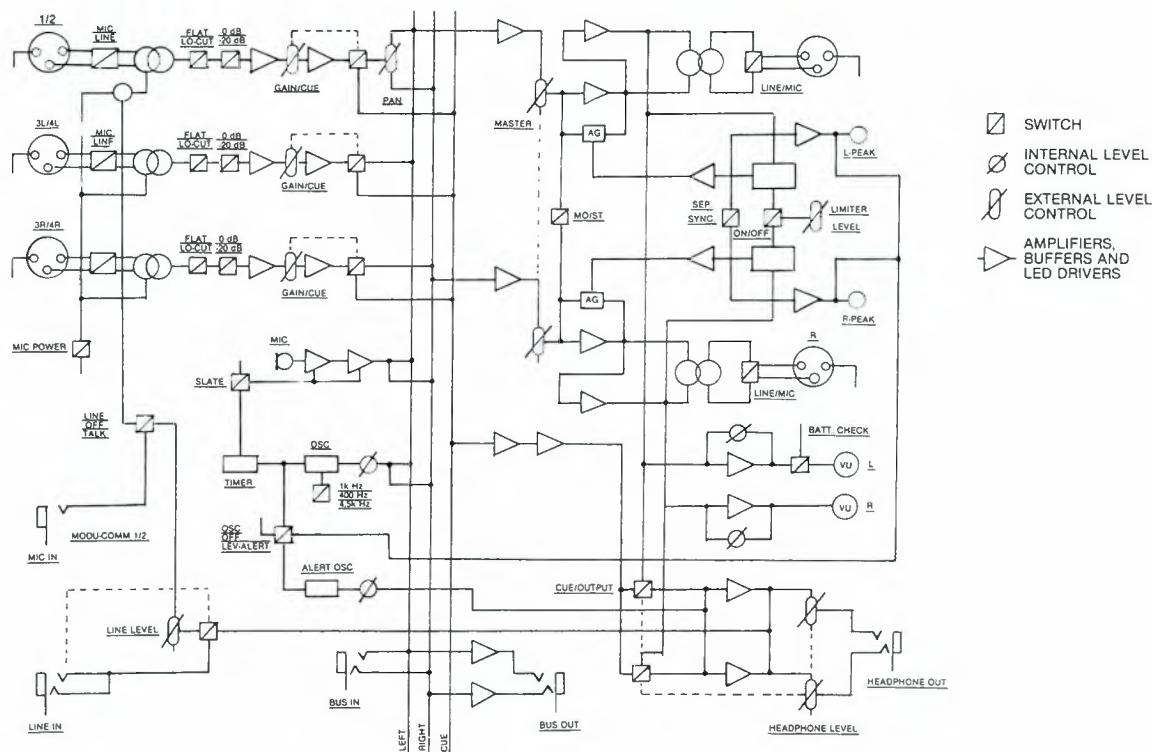


Figure 1. A close examination of this block diagram reveals only some of the versatility provided by the mixer.

MORE THAN CABINETS, WE OFFER SOLUTIONS.

Everything in consoles and racks for the video professional.

We've been designing and building high quality video consoles and racks for over 35 years. So we know the ropes. This experience can save you considerable time and money.

Preassembled, modular units make it easy.

You can choose from hundreds of video consoles, cabinets, racks, desks, EMI/RFI enclosures, and accessories in a wide range of hi-tech colors and styles.

Our consoles and racks are modular for future expansion and everything is preassembled for quick, easy set up.



Modular design provides flexibility.

Free design assistance.

If you like, our team of professional designers can help you design your own custom system.

They'll work with you so you'll get maximum aesthetics, ergonomics, efficiency, durability, and economy.

Quality you can count on.

When you choose Stantron video consoles and racks you're choosing the highest quality.


Our years of experience assures you the very best solution whether it's simply a VTR/VCR rack or an entire room of custom consoles.



A full range of power panels and strips.

Get all the facts.

Fill out the coupon or Reader Reply Card. Or, just give us a call. We'll rush you our new Preplanner and Video Catalog.

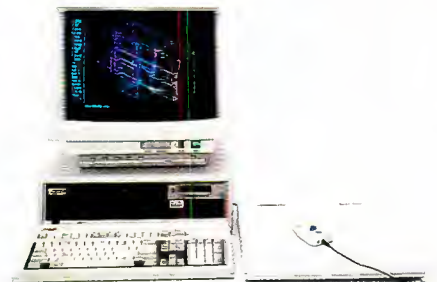

Professional design assistance.



Direct your inquiries to:


Stantron

Marketing Manager
6900-6918 Beck Ave.
No. Hollywood, CA 91605
Phone: (818) 841-1825 Fax: (818) 841-8892

Console and Rack Preplanner and Video Catalog!

Please rush me your Preplanner and Catalog.

Name _____
Title _____
Company _____
Address _____
City _____ State _____ Zip _____
Phone _____



BE/9-89

panel lie twin VU meters, a meter lamp, battery check switch, built-in slate mic and adjacent control, *Lev-Alert* and limit controls, a selector switch for a built-in oscillator and an LED power indicator. Two-color LEDs also are located in this section to indicate audio peaks, switching from red to green when the limiter is switched in.

To the right are the master and headphone-level controls and twin toggle switches controlling a unique feature called *Modu-Comm*.

Of the four input channels, two are continuously panned mono varieties, and two are individually adjustable stereo inputs. These inputs can be used to handle stereo micing, paired microphones or an external tape source. Each of the XLR-type channel inputs is switchable to accept either mic or line-level signals. When the switch is in the line position, phantom power cannot be used with that channel.

Another back-panel switch, located next to each input, reduces incoming signals by 20dB. The pad works in both line or mic modes. When switched in, this attenuator decreases overload distortion potentials to an ideal point for close micing situations or for mixing high-level line signals. From

my experience, full gain is perfect for normal line levels and distant micing. To reduce ambient low-frequency noise (such as handling noise), each input also features a selectable low-cut filter that operates at 6dB per octave with a -3dB point of 150Hz.

Both left and right outputs are transformer-coupled balanced. The output levels can be switch-selected to either mic or line levels. An output mode switch lets you convert the stereo outputs to dual mono. In the mono mode, the unit is capable of mixing six inputs, with the summation of the signal being available at either output.

Operational considerations

It's usually hard to achieve a nice, wide audio depth of field for stereo satellite remotes without carting out some hefty gear. The versatility offered by the mixer's mono/stereo input combinations make the task easier. If you choose to use a few ambient microphones to build a stereo image, you have total control over them at your fingertips. The raw stereo output bus is available on the back panel.

This versatility also comes in handy if you need to produce a 2-channel mix for

Betacam or M-II, and you have post-production demands to keep in mind. I've also used it as a 6x2 mono mixer, as shown in Figure 1. This is particularly useful in situations that require several inputs and a location mix feeding down to a tape machine. Few assignments follow your original game plan, so the flexibility to switch back and forth according to your needs is extremely handy.

Automatic level control

The mixer's *Lev-Alert* feature will be appreciated by operators who, like me, frequently find themselves on an ENG assignment where they are not only in charge of the mixer, but also have to handle a camera and a thousand other details. The circuits control the audio levels automatically, thereby freeing you for other duties. Once the *Lev-Alert* is activated, an adjustable signal will sound in your headphones if the levels reach a point of overmodulation.

The built-in limiter works in two modes: *sync* and *sep*. An overmodulated signal on either channel will activate limiting on both channels in *sync* mode, and the *sep* mode applies two discrete limiters (one per channel) to the left and right outputs. This

A Memo to C.E.'s About Audio Switchers

Anyone who has researched the routing switcher market has uncovered "The Problem": Audio switchers are small or they are large, but they aren't mid-size. And even when they are small, the price is still large—to cover the upgrade path that's always built in.

360 Systems has a solution. We invite you to compare our new AM-16 Series with *anything else* on the market. Here are just a few of our features:

- Balanced inputs and outputs
- Mono, stereo or multi-level
- Expandable matrix
- Gain adjustment on each input
- Non-volatile program storage
- Multi-station remote control via EIA-422/485 or MIDI
- Redundant power supply
- Large, clean LED displays
- Exceptional audio performance

360 Systems' new audio switchers start at only \$1195 for a 16 x 16 matrix. And that includes everything. Call us for complete information on the industry's new price performance leader.

360 Systems

18740 Oxnard Street
Tarzana, California 91356
Phone (818) 342-3127
Fax (818) 342-4372

MADE IN U.S.A.



Circle (64) on Reply Card

DISCOUNT VIDEO WAREHOUSE

Discount Video Warehouse is a wholly owned subsidiary of Roscor Corporation

- Quantities Limited
- All Prices subject to change
- All Sales Final

An Incredible Sony Camera at an Incredible DVW Price!

Lowest Price Anywhere!



Manufacturer's Suggested
List Price
\$5280.

Dealer Inquiries
Welcome

SONY[®] 2 CCD Color Camera EDP-10F with Fujinon 13X Lens

- High Resolution - 550 Lines
- High Quality CCD's '768 HAD' Interline Transfer Features Sony's Innovative 'Double P-Well' Design Assuring Reduced Noise, Reduced Smear and Excellent Performance Even in Extreme Lighting Conditions
- 25 Lux Minimum Illumination
- High Speed Electronic Shutter - 6 Positions Up To 1/2000th Second Gives You Blur-free Images of Even Fast Moving Objects. The Perfect Camera for Sports, Manufacturing, Research or any Action Analysis Application.
- Interfaces With Most VCR's - 4 Position VCR Selection Switch Handles, 3/4", S-VHS and Industrial and Consumer Half-Inch Portables.
- Y/C Out

System includes:

Camera Head, Camera Adapter, 1/5" Viewfinder, Stereo Mic, and Fujinon A13X10 Servo Zoom Lens

Incredible DVW Special Price

*while quantities last!

\$1995.



INTRODUCING
OUR NEW
MODEL BP325
PORTABLE
USER STATION.
USER PROGRAMMABLE
WITH A POWERFUL
MICROPROCESSOR.
LIGHTWEIGHT
CONTOURED BODY.
AND GREAT
SOUNDING
CIRCUITRY.

THE FACE OF INTERCOM
AS IT SHOULD BE

USER ACTIVATED

WORKS ON ONE
OR TWO CHANNELS
AND INCLUDES
CALL SIGNALING.
MOMENTARY/
LATCHING SWITCHES.
PROGRAM INPUT.
CENTRAL-POINT
MIC TURN-OFF.
AND MUCH MORE.

MODEL BP325:
USER ACTIVATED
FOR OPTIMUM
PERFORMANCE.
PLEASE CALL
OR WRITE
FOR DETAILED
LITERATURE.

RTS SYSTEMS

INCORPORATED

THE FIRST NAME IN INTERCOMMUNICATIONS

1100 WEST CHESTNUT STREET BURBANK, CALIFORNIA 91505

PHONE 818 566-6700 FAX 818 843-7953

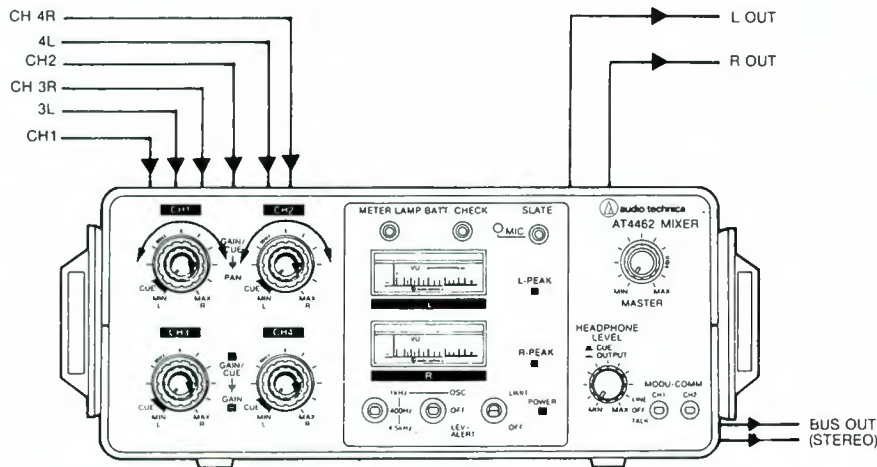


Figure 2. The mixer can be configured in three basic configurations: 4 × 2 (shown here), 6 × 1 or 4 × 1 with 2-way intercom.

is especially useful if the two outputs are handling unrelated source material.

Although a cue function is common in broadcast consoles, it is not often available in small portable mixers. The AT4462 provides a cue feature, which I often use to spot-check the cues for multiple announcers or tape roll-ins. Turning any input-channel control fully counter-clockwise activates a prefader cue and disconnects that channel from the mix bus. The cue mix is available only at the headphone output.

Pressing the slate button on the front panel activates a 1s tone. After the tone, the built-in omnidirectional electret condenser microphone becomes live for track and cuing announcements. The internal microphone is good enough to be used in a pinch as a broadcast backup mic. The slate tone/oscillator provides three different frequencies, selectable from the front panel. The tones can be activated in a continuous mode for tests or line identification.

Another helpful feature on the AT4462 is Modu-Comm, as shown in Figure 2. To put it simply, Modu-Comm permits program audio from the mixer output to be sent down the incoming microphone line and be monitored at the mic via a decoding accessory. These program audio signals are independent of the microphone gain, and they do not interfere with the mic's performance.

I've found the feature to be convenient, especially on larger productions where I have a separate boom operator with a fishpole or a boom mic. With the single cable used by the boom man feeding the mic signal back to me, I can feed program material back up the line so he can hear what's going on through the headset. With the headset, you essentially have an intercom that lets you give direction or

allows the boom operator to hear the results of various mic placements.

The feature also is useful when the on-camera talent is wearing a lapel mic. In this instance, you can feed the signal back up the talent's mic line and into an ear-piece. Now, the talent can hear himself or other program material, and you can talk back to provide on-air cues.

The mixer has the capability to become part of an easily expandable system. Multiple AT4462s can be interconnected with a single cable simply by using the 1/4-inch stereo bus in and bus out jacks provided. Output of the bus out jack is a premaster mix of all input signals, while the bus in jack is probably most useful as an additional unbalanced stereo input.

I found that the Audio-Technica AT4462 has the versatility to be used in seemingly countless applications. Yet, it is simple to use, lightweight and portable, and it's built to take the punishment remote gear always receives.

Editor's note: The field report is an exclusive BE feature for broadcasters. Each report is prepared by the staff of a broadcast station, production facility or consulting firm.

In essence, these reports are prepared by the industry and for the industry. Manufacturer's support is limited to providing loan equipment and to aiding the author if support is requested in some area.

It is the responsibility of **Broadcast Engineering** to publish the results of any piece tested, positive or negative. No report should be considered an endorsement or disapproval by **Broadcast Engineering** magazine. [:-)]]


New Product!

CAMPLEX

World's First Universal Camera Adapter and Control Unit for ENG/EFP Color Cameras

\$2,995

Expands and Enhances Versatility for SNG/ENG/EFP Applications

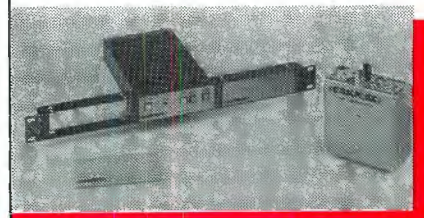

"CAMPLEX CP-201 CAMERA ADAPTER SYSTEM" adds new dimension and flexibility to your portable color camera operations.

- The CAMPLEX CP-201 CAMERA ADAPTER and CONTROL UNIT extends camera range up to 5000' on a single coax without bulky, expensive multi-core and triax cables. No more need to tie cumbersome multiple video and audio cables together. Forget siamese cable — all you need is a single, inexpensive coax cable.



- CAMPLEX CP-201 CONTROL UNIT is counter top or rack mountable and produces and processes necessary SEND/RECEIVE signals from the control location.
- The 1 1/4 lb. CAMPLEX CP-201 CAMERA ADAPTER connects to camera via standard 14 pin multiconductor VCR cable or standard BNC connections and clips to operators belt.
- Delivers multi-purpose, bi-directional video and audio signals via a single coax cable for short and long range distances.
- Set up time & labor is reduced significantly because of the elimination of problems associated with expensive triax, multi-core and multiple video and audio cables.
- Adaptable to any camera having BNC 75 ohm connections for Video out and Genlock; or to any camera configured to interface with a standard 14 pin VCR connection.

Product Functions:

1. Genlock (black burst feed to camera)
2. Camera Video
3. Universal Intercom (2 or 4 wire)
4. Call/Tally Function (to camera)
5. Mic/Line Audio (standard mic. or line level in.)
6. Aux. Audio Return/IFB (from production)
7. Remote Power (power sent down coax to operate Camera Adapter only up to 1000 feet)

Overall System Video Performance:

- Frequency Response — 30Hz - 4.2MHz +/- 1db
- Differential Gain — +/- 2%
- Differential Phase — +/- 2 degrees
- Signal to Noise Ratio — Better than 55 db



© 1989
Concept W Systems Inc.
3302 W. 6th Ave.
Emporia, KS 66801 USA
Phone 316-342-7743
Fax 316-342-7405

See us at Booth 329 SBE Kansas City

Circle (100) on Reply Card



Choose your candidate carefully

By Bob Van Buhler

Eleven candidates will vie for six seats on the SBE Board of Directors at a time dubbed a "crossroads" for the society. The membership will vote on these candidates this month. Results will be announced at the SBE national convention.

- **Philip A. Aaland** of Tucson, AZ, is seeking a second term as director. He is a past chairman and secretary of Chapter 32, and chief engineer at KGUN-TV. Aaland is an SBE-certified professional broadcast engineer, a member of SMPTE and NARTE-certified (first-class).

Aaland thinks the SBE should emphasize training and education. He says that getting broadcast courses into local colleges is important to an engineer's professional development. Aaland also is a strong proponent of a national frequency coordination database.

- **Fred Baumgartner** has been involved in broadcast engineering since 1971. He was an instructor of vocational electronics and has served as a contract engineer for stations in the Wisconsin area. He also was manager of technical operations for KWON-TV and KHOW-AM in Denver. He currently is director of engineering for All Pro Broadcasting.

Baumgartner has held all chapter offices for Chapters 24 and 48 and is active in the SBE chapter-of-the-air (No. 73). He sees a need for emphasizing the development and promotion of policies, ranging from rules restricting work to supporting technical standards. Baumgartner also emphasizes the importance of expanding training and certification.

- **Terrence M. Baun**, Milwaukee, is seeking re-election to the board. He has served as chairman, vice chairman and secretary of the Milwaukee chapter, and is completing a term on the national board.

Baun is a principal of Criterion Broadcast Services in Milwaukee, with more than 20 years of experience. He is certified as a professional broadcast engineer, and has been recertified twice as senior broadcast engineer.

Baun stresses the need for good communications with the membership. He advocates that board members and officers

visit each local chapter, and views the hiring of a full-time executive director as a high priority.

- **Dennis E. Behr** also seeks election to the board. He is a master chief petty officer in the Naval aviation reserve, and chief engineer of the Wisconsin public TV telecommunications operations center.

Behr is a 2-term chairman of Chapter 24. He also has served as chapter vice-chairman and treasurer. Behr's stated priorities for the SBE are in the following order: education, certification, a full-time executive director and expanding membership. He places a high priority on local chapter involvement in the SBE's education program.

- **Stephen K. Bramham** of Smyrna, GA, joins the list of candidates by membership petition. He currently is an audio engineer with Turner Broadcasting System, assigned to the CNN and HNN networks. He previously served as engineering supervisor for WXIA-TV in Atlanta, and has worked with AFRTS in Taiwan and Vietnam. Bramham is a member of SBE, SMPTE and NARTE.

His goals for the SBE include increasing participation and acceptance of the SBE certification program, and placing more emphasis on HDTV, digital audio and fiber optics. He seeks to promote better understanding between SBE and SMPTE, AES and IEEE. Bramham also is an advocate of pre-emptory legislation to prevent state and local licensing of broadcast engineers.

- **Dane E. Ericksen**, senior staff engineer with Hammett & Edison Consultants, San Francisco, is another of the board's incumbents seeking re-election. Ericksen, formerly an FCC field engineer, places a high priority on regulatory matters and the filing of comments on FCC proceedings. He made significant contributions in this area over the last two years. Ericksen also was a dominant figure in the SBE's investigation and policy formulation on professional licensing of broadcast engineers.

Ericksen has an intriguing goal for SBE: to seek amendment of the Communications Act requiring that at least one FCC commissioner have an engineering background. As proof of that background, he would advocate certification as a senior

broadcast engineer or equivalent by a major engineering society, or the commissioner's registration as a professional engineer.

- **Joe Snelson** of Fairway, KS, seeks election to the board. Snelson is a certified senior TV broadcast engineer and has served in various engineering management capacities since 1970. For the past six years, Snelson has been director of engineering for KCTV-TV in Kansas City, MO.

Snelson's priorities include continuing to fulfill the purposes set forth in the by-laws and encouraging the active participation of each member in local chapter meetings. Snelson also places a priority on seeking a full-time paid executive director and the regular publication of the "SBE Signal."

- **Tom Weems** of Simi Valley, CA, has served two terms on the board of directors and is seeking re-election. Weems is certified as a senior TV broadcast engineer and has served on several national SBE committees, including the nominating committee, chapter awards and SMPTE-SBE liaison.

Weems is an advocate of open government for the SBE, with more decision-making by the board of directors and less by the executive committee. Weems has been a longtime advocate of greater openness in the financial affairs of the society, including complete financial reporting to the membership. His priorities include the establishment of a formal finance committee.

- **Larry White** of Tulsa, OK, also is an incumbent seeking re-election. White is director of engineering for KVOO-AM/FM, and has served at the local level as secretary-treasurer of Chapter 56.

White seeks greater visibility of the national SBE at the local level. He thinks this will make the society a more effective force within the industry. White sees providing chapter support as a key unifying element vital to the success of national efforts. He identifies the SBE's greatest assets as the certification program and the national convention, and urges members to support these efforts.

- **Charles W. Kelly, Jr.**, a former board and executive committee member, seeks to return as a director. Kelly is director of in-

Continued on page 133

Van Buhler is manager of engineering at KNIX-AM/FM, Phoenix.

INTRODUCING YOUR NEW MASTER CONTROL SUPERVISOR



Wrong operator decisions can cause downtime. And what could be worse than dead air. Meet the *Moseley PC-based MRC 2 Remote Control System*. It automatically assumes command in crisis situations and supervises your day-to-day operations.

MRC 2

Intelligent- Customer pre-programmed responses automatically take charge in crisis situations, eliminating operator error and guesswork.

Accurate- The MRC 2 achieves greater facility management through fast and accurate real-time control of all desired parameters.

Diverse- The MRC 2 is a true building block system. Remote terminals, control terminals and display options can be configured to your facility's specific requirements.

Accessible- 24-hour *dial-up* access is available over the public telephone network via the PC and modem.

Diagnostic- The historical data generated from the system is automatically stored for reporting and trend analysis purposes.



Relax- Let the Moseley MRC 2 take charge!

Moseley



Moseley
Associates
Incorporated

111 Castilian Drive
Santa Barbara, CA
93117-3093

a
Flow General
Company

Phone 805 968 9621
Telex 658448
FAX: 805 685 9638

*Thanks to KCCO for use of their master page

Circle (67) on Reply Card

Radio: the roots of broadcasting

By Jerry Whitaker,
editorial director

**AM radio, the grandfather of the broadcast industry,
has reshaped our view of the world and of ourselves.**

"Just a minute! Something's happening! Ladies and gentlemen, this is terrific. The end of the thing is beginning to flake off! The top is beginning to rotate like a screw! The thing must be metal!

...This is the most terrifying thing I have ever witnessed! Wait a minute. Someone is crawling out of the hollow top. Someone or...something. I can see peering out of that black two luminous disks...are they eyes? It might be a face. It might be..."

With that, Orson Welles and his Mercury Theater players unleashed the "War of the Worlds" on Halloween Eve of 1938. The play, only an hour long, caused people to dash hysterically into the streets, flock to churches to pray, or fatalistically face death at the hands of Martian invaders. From the CBS Radio Studio One in New York, Welles demonstrated, convincingly and disturbingly, the power of radio.

Since 1887, when Heinrich Hertz first sent and received radio waves, to the present, an amazing amount of progress has been made by radio and TV engineers and scientists. We take for granted today what was considered science fiction just a decade or two ago. The route from the primitive spark-gap transmitters to the present state-of-the-art has been charted by the pioneering efforts of many.

Broadcasting (along with telephone technology) has linked the world more closely than the early pioneers of the art could have imagined. Eighty years have passed since Charles D. (Doc) Herrold founded a voice station (as it then was known) at San Jose, CA. Developments between then and now have been marked by many inspired breakthroughs and many years of plain hard work.

In the beginning

In 1895, when Guglielmo Marconi was 21, he and his brother Alfonso first transmitted radio signals across the hills behind their home in Bologna, Italy. Unable to interest the Italian government in his invention, Marconi took his crude transmitter and receiver to England, where the British navy quickly realized the maritime potential of radio. Within two years, the Marconi Wireless Telegraph Company had been founded.

The invention of the vacuum tube diode by J. Ambrose Fleming in 1904 and the triode vacuum tube amplifier by Lee DeForest in 1906 launched broadcasting as we know it. Early experimental stations took this new technology and began developing their own tubes using in-house capabilities, including glass-blowing. As the young electronics industry began to grow, vacuum tubes were produced in great quantity and standardized (to a point), making it possible to share new de-

velopments and applications.

It is difficult to answer the question, "Who was the first broadcaster?" Much depends on what is defined as *broadcasting*. When it comes to AM radio, the grandfather of the broadcast industry, five stations established a rich tradition of broadcasting firsts:

- **KDKA, Pittsburgh.** Dr. Frank Conrad conducted the experimental work that led to the establishment of KDKA, which made its formal debut on Nov. 2, 1920. Conrad was apparently the first to use the term "broadcast" to describe a radio service.
- **WWJ, Detroit.** The birthplace of broadcasting at WWJ was the Detroit News. The station signed on the air on Aug. 20, 1920. It was the first station to be operated by a newspaper, and the first commercial station to broadcast regularly scheduled daily programs.
- **KCBS, San Jose, CA.** Doc Herrold's station at San Jose (which eventually became KCBS, San Francisco), began as an experimental operation with the first documented transmissions occurring in 1909. It is said of Herrold that he conceived the idea of broadcasting information and entertainment programs to the public.
- **WHA, Madison, WI.** 9XM-WHA achieved its first successful transmission of voice and music in 1917 from the University of Wisconsin campus in Madison. Pioneers in the establishment of the station





The standards converter with the smoothest moving image of any system.

OKI's Digital Television Standards Converter Model LT2000 achieves *True Motion Continuity*. Next Generation Technology has produced the "Motion Vector System" (MVSTTM), making possible the first portable standards converter to eliminate motion discontinuity, or jerkiness, that occurs with high-speed camera panning and fast-action video program material. Other standards converters, using the now antiquated 2-and 4-field interpolation systems, fail to reduce motion discontinuity, and as a result are unacceptable for the professional market.

MVSTTM divides each field of video into pixel sections for motion vector detection and measurement, using the Interactive Gradient Method (IGM). IGM, the most advanced method ever

developed for precise and finite motion detection, allows the LT 2000 to produce the smoothest moving image of any system available. MVSTTM accomplishes this without the resolution loss common on other high-end standards converters. The displayed video picture is not only free from conversion artifacts, but also without interpolation resolution loss. The end result...a clean, sharp picture with *True Motion Continuity*!

With the LT2000, your only problem is telling the output from the input!

*IGM is a development of Kokusai Denshin Denwa Co., Ltd.



TV STANDARDS CONVERTER

LT2000TSC

Circle (68) on Reply Card

Head Office:
Overseas Marketing & Sales
10-3, Shibaura 4-chome,
Minato-ku, Tokyo 108, Japan
Tel: (03) 454-2111
Fax: (03) 452-5214
Telex: J22627
Cable: OKIDENKI TOKYO

London Office
Ground Floor North 3,
Shortlands, Hammersmith
International Centre,
London W6, U.K.
Tel: (01) 741-2324
Fax: (01) 741-4122
Telex: 927029 OKIDEN G

Local OKI Distributor

SAECO INTERNATIONAL
1122 East Chevy Chase Drive,
Glendale, CA 91205,
U.S.A.
Tel: (213) 245-7708
Fax: (818) 241-2691

ALEX L. CLARK LTD.
30 Dorchester Avenue
Toronto, Ontario M8Z 4W6,
Canada
Tel: (416) 255-8594
Fax: (416) 255-9260

OKI


Oki Electric Industry Co., Ltd.
Tokyo, Japan

Circle (68) on Reply Card



GLOBAL SUPPORT FOR GLOBAL COMMUNICATIONS

Ku-Band Special Application TWT Amplifier Systems

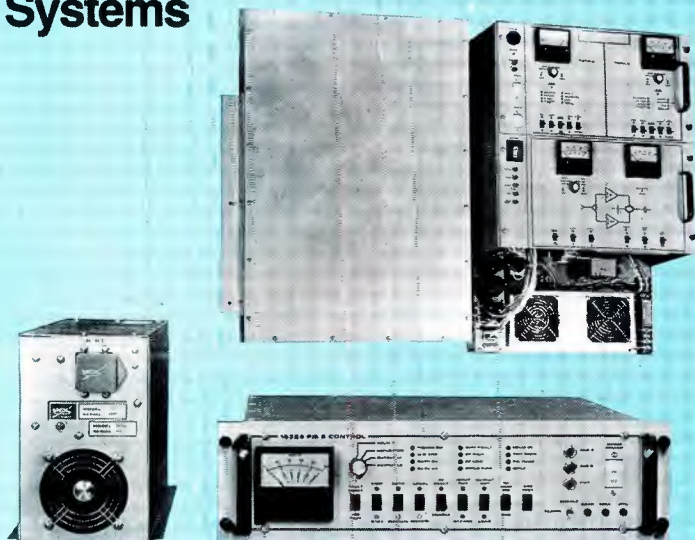

Tested, tried and proven by communications experts worldwide, MCL's Ku-Band Special Application TWT Amplifier Systems meet—and exceed—industry requirements for reliable performance under all conditions. Advanced technical design and superior mechanical layout allow MCL equipment to operate effectively even in the most extreme cases: interference (EMI-radiation/RFI-susceptibility), electrical (power source), mechanical stress, environmental (temperature/humidity), general maintenance and transportable applications.

MCL offers a wide range of Ku-Band Special Application TWT Amplifier Systems designed specifically for the transportable satellite communications (video, voice and data) market. For those who require hub-mounting or portable equipment, MCL has deliverable switch-mode power supplies and a new range of special configuration 1:1 redundant and VPC TWT Amplifiers utilizing these power supplies. Output powers range up to 500 Watts for a phase combined unit.

MCL is the leading manufacturer of high-quality, competitively priced amplifiers, all of which are noted and proven for *unsurpassed performance*.

For technical specifications and detailed information about MCL's Ku-Band Special Application TWT Amplifier Systems, call or write MCL, and request your **FREE** copy of MCL's New Brochure #6010.



MCL


MCL, INC.
501 S. Woodcreek Road
Bolingbrook, IL 60439
312-759-9500 TWX 910-683-1899

Manufacturers of TWT and Klystron Amplifiers for Satellite Communications.
24-Hour Sales and Technical Support for Immediate Service Worldwide.

Sarnoff: the visionary

The "broadcasters" of the 1920s and '30s were experimenters, not business people. Some businesses did, however, spring from the makeshift laboratories of the early scientists. David Sarnoff, general manager of RCA, was quick to capitalize on the new medium.

Sarnoff was a powerful figure in the development of radio broadcasting in the 1920s and '30s, and a key mover in the development of television from its beginning in the late 1920s through maturity in the '50s and beyond. Sarnoff was born in Russia in 1891, and came to the United States at the age of nine. After completing his schooling, Sarnoff secured a job as a telegraph operator with the Marconi Wireless Company and quickly proceeded to make a name for himself. In 1912, at the age of 21, he intercepted the first distress signals from the doomed ship "Titanic." Sarnoff stayed at his post for 72 straight hours to keep the world apprised of the rescue attempts and to broadcast

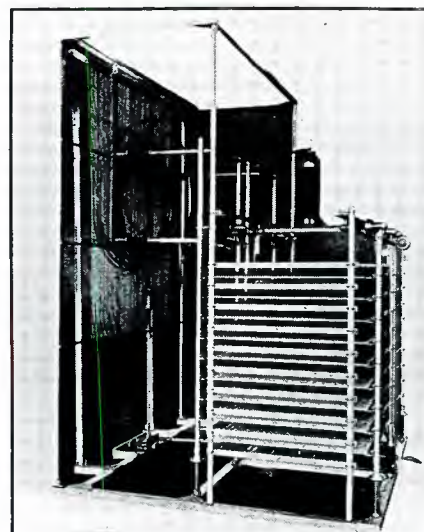

A portion of the WLW power amplifier tank circuit partially assembled. The 500kW transmitter used three such units.

the names of survivors. When the disaster was over, Sarnoff was a household word.

Four years later, Sarnoff was a contracts manager at the Marconi Company. He sent a memo to his boss suggesting the use of radio for entertainment:

"I have in mind a plan of development which would make radio a household utility in the same sense as the piano or phonograph. . . . The receiver can be designed in the form of a simple 'Radio Music Box'...(which) can be placed in the parlor or living room."

Sarnoff's marketing vision and appetite for hard work led him in 1919 to join the Radio Corporation of America (RCA) as general manager. RCA was created by General Electric when the American Mar-

Circle (75) on Reply Card

To get a bigger slice of your video patching business, we borrowed an idea from the experts.



Quick delivery.

Whether it's a pepperoni pizza or a patchbay, nobody likes waiting for deliveries. And when you order video products from ADC Telecommunications, you don't have to. Because unlike other manufacturers, we sell through a nationwide network of video distributors. So instead of waiting weeks for delivery from a factory a thousand miles away, you simply call the ADC distributor in your area.

We offer toppings the others can't match, too. Our video jacks come in gold or nickel finish, terminating or non-terminating and phase compensated as well.

Circle (101) on Reply Card

But you don't have to order an extra-large with everything to get fast delivery. We'll give you the same service even if you just need a few patch-cords. Because we know if we offer a broad range of quality products at fair prices, and deliver them faster than the competition, we'll get a bigger slice of your business.

We call it the "Domino Theory."

For the name of your local ADC stocking distributor, call **1-800-255-3891**, extension **3126** east of the Mississippi or **3119** west of the Mississippi.



ADC Telecommunications

"Where Quality Runs Full Circuit."

4900 West 78th Street, Minneapolis, MN 55435

www.americanradiohistory.com


coni Company was returned to private control by the U.S. government following wartime operations. RCA's function was principally to handle the nation's overseas communications. RCA later became a stand-alone company, independent of GE. Because he had been awarded the rank of Brigadier General, Sarnoff was best known at RCA in the years following World War II as "The General."

Radio Central

Sarnoff's and RCA's first major project

was the construction of a huge radio transmitting station at Rocky Point, NY. The facility, completed in 1921, was hailed by President Harding as a milestone in wireless progress. In fact, Harding put the station into operation by throwing a switch that had been rigged up at the White House. Wireless stations around the globe had been alerted to tune in for a congratulatory statement by the president.

For a decade, Radio Central, as it was known, was the only means of direct communication with Europe. It was also the

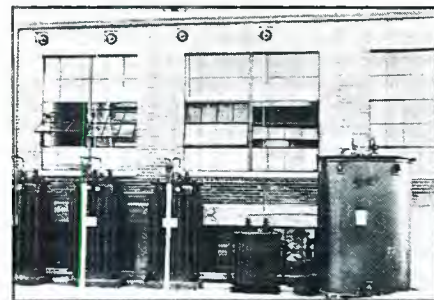

Three plate transformers, a rectifier filter reactor and a modulation reactor were placed outside the WLW transmitter building. A protective fence was installed shortly after this photograph was taken in 1934.



For AM, FM, SCA
and TV modulation monitors.

WHEN ACCURACY COUNTS...COUNT ON...

Call (215) 687-5550 or write for more information on Belar AM, FM, Stereo, SCA and TV monitors.



BELAR
ELECTRONICS LABORATORY, INC.
LANCASTER AVE. AT DORSET DEVON, PA 19333

Circle (72) on Reply Card



The WLW 500kW transmitter building as viewed from the front entrance. The 50kW exciter can be seen on the left, with the 500kW amplifier-modulator in the background. The audio control room is situated at the right. Circa 1934.

Camera cable information from the company that knows best...Mohawk!

Mohawk offers superior broadcast camera cable and a free, newly expanded camera cable and connectors information kit!

If the job demands flawless broadcast transmission, order the best cable—Mohawk. Count on Mohawk's quick response to assembly orders and repairs to save you precious time.

Our expanded product line features:

- Ultra-flex VTR cable assemblies for Hitachi, Ikegami, Panasonic, Sony and others
- Slimline studio camera cables
- Waterproof, high strength three-piece connector design
- Customized lengths

Mohawk's entire team of engineers, technicians, and sales and service professionals are committed to providing product and service excellence. Our strict performance standards exceed even industry requirements.

Get your information from the reliable source! Mohawk's new edition of the TV camera cable and connectors information kit is available free. Just call or write Mohawk today!

MOHAWK

Wire and Cable Corporation

9 Mohawk Drive • Leominster, MA 01453 • (508) 537-9961
Toll free: 1-800-422-9961 • In MA: 1-800-642-9961



Circle (73) on Reply Card

"hopping off" point for messages transmitted by RCA to Central and South America.

The Rocky Point site was not only famous for its role in communications, but also for the pioneers of the radio age who regularly visited there. The guest book lists such men as Guglielmo Marconi, Lee DeForest, Charles Steinmetz, Nikola Tesla, David Sarnoff and many others. Radio Central was a milestone in transatlantic communications.

There were originally two antenna structures at the Rocky Point site, each with six 410-foot towers. The towers stretched over a 3-mile area on the eastern end of Long Island.

The facility long outlived its usefulness. RCA demolished one group of six towers in the 1950s; five more were destroyed in early 1960. The last tower of the once mighty Radio Central was taken down on Dec. 13, 1977.

WLW: The nation's station

Radio station WLW has a history as colorful and varied as any in the United States. It is unique in that it was the only station ever granted authority to broadcast with 500kW.

The station began with 20W of power, as a hobby of Powel Crosley Jr. The first license for WLW was granted by the Department of Commerce in 1922. Cros-

One class beyond. More and even tungsten light. Sachtler Reporter 650H.



The new dimension in lighting.

Reporter 125D, 270D, 100H, 250H, 300H, 650H; Production 575D, 1200D.

Sachtler's new product line brings innovation in lighting. Built with worldwide known Sachtler quality.

The Sachtler Reporter 650H is setting new standards for 600–1000 watt tungsten lights. It achieves 3200 lux in spot setting (at a distance of 16.4 feet/5 m) and distribution remains extraordinarily even for the whole focusing range (1:6).

The lightweight, compact housing holds a 4-inch reflector with an integrated filter slot and barn doors.

The Reporter 650H set comes complete with three lamps; bulbs for 650 W, 500 W, and 300 W for the utmost creative flexibility in illumination; all in one case, including accessories.

The Reporter 650H set as if you had 3 kW.

sachtler®
corporation of america



55, North Main Street
Freeport, N.Y. 11520
Phone (516) 867-4900
Telex 140107 sac frpt
Fax (516) 623-6844

California office:
3316 West Victory Blvd.
Burbank, CA 91505
Phone (818) 845-4446

Circle (71) on Reply Card

www.americanradiohistory.com

ley was authorized to broadcast on a wavelength of 360 meters with a power of 50W, three evenings a week.

Growth of the station was continuous. It operated at various frequencies and power levels until, in 1927, WLW was assigned to 700kHz at 50kW and remained there. Operation at 50kW commenced on Oct. 4, 1928. The transmitter was located in Mason, OH, but the station could be heard as far away as Jacksonville, FL, and Washington, DC.

The superpower era of WLW began in 1934. The contract for construction of the enormous transmitter was awarded to RCA in February 1933. Tests on the unit began on Jan. 15, 1934. The cost of the transmitter and associated equipment was approximately \$400,000 — not much today, but a staggering sum in the middle of the Great Depression.

At 9:02 p.m. on May 2, programming was commenced with full 500kW of power. The superpower operation was designed to be experimental, but Crosley managed to renew the license every six months until 1939. The call sign W8XO occasionally was used during test periods, but the regular call sign of WLW was used for programming.


"Immense" is the only way to describe the WLW facility. The antenna reached a height (including the flagpole at the top) of 831 feet. The antenna rested on a single ceramic insulator that supported the combined force of 135 tons of steel and 400 tons exerted by the guys. The tower was guyed with eight 1 7/8-inch cables anchored 375 feet from the base of the antenna.



Another view of the WLW transmitter and control console as it appeared in 1934. Full-time operation of the monster 500kW system began on May 2, 1934.

The main antenna was augmented by a directional tower designed to protect CFRB, Toronto, when the station was using 500kW at night. The directional system was unique in that it was the first designed to achieve both horizontal directivity and vertical-angle suppression.

A spray pond in front of the building provided cooling for the system, moving

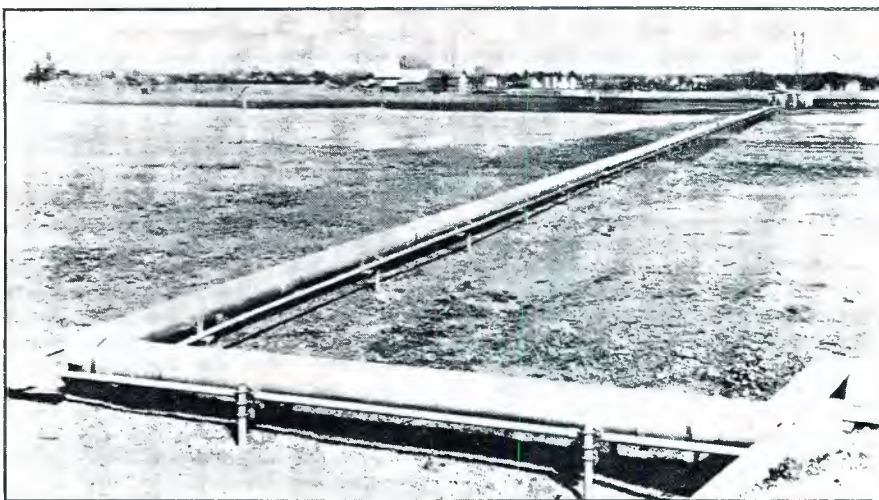

The RF transmission line to the antenna was 775 feet long. The outer tube had an inside diameter of 9.78 inches, and the inner tube had a diameter of 1 7/8 inches. The surge impedance of the line was 100Ω.

512 gallons of water per minute. Through a heat exchanger, the water then cooled 200 gallons of distilled water in a closed system that cooled the transmitting tubes.

The transmitter consumed an entire building. Modulation transformers weighing 37,000 pounds each were installed in the basement. Three plate transformers, a rectifier filter reactor and a modulation reactor were installed outside the building. The "exciter" for the transmitter produced 50kW of RF power! A motor-generator was used to provide 125Vdc for control circuits.

The station had its own power substation. While operating at 500kW, the transmitter consumed 15,450,000kWh per year. The facility was equipped with a complete machine shop because station personnel had to build much of the ancillary hardware needed. Equipment included gas, arc and spot welders, a metal lathe, milling machine, engraving machine, sander, drill press, metal brake, table saw and other equipment. A wide variety of electrical components were also on hand.

WLW operated at 500kW until March 1, 1939, when the FCC ordered the station to reduce power to 50kW. The station returned to superpower operation a few times during World War II for government research. However, the days when WLW could boast to being "the nation's station" were in the past.

The FCC enters the picture

As broadcasting began to develop, it became obvious to lawmakers that some type of regulation was needed to provide for orderly use of the airwaves. To fill this need, the Federal Communications Commission was formed in 1934, the result of the Communications Act of the same year. The commission, now observing its 55th year, was established officially on June 19,

1934, when President Franklin Roosevelt signed the enabling legislation. During the first year of its life, some of the commission's noteworthy actions were to:

- Deny the first broadcast license (KGIX, Las Vegas) for failure to complete its construction as required.




WLW was equipped with a well-stocked machine shop. Station personnel constructed the majority of the ancillary equipment needed at the station.

- Require current ownership information from broadcast stations.
- Hold hearings on non-profit education broadcasting allocations.
- Survey allocations for clear and other channels (with several stations operating simultaneously at night).
- Revoke the first amateur license.

The "golden era" of radio

Radio of the pre-World War II days was more than an entertainment and information medium. It was a friend, a connection with the rest of the world, an escape from the hardships of the Great Depression. Radio was special. People involved in it were special. This, legend has it, was

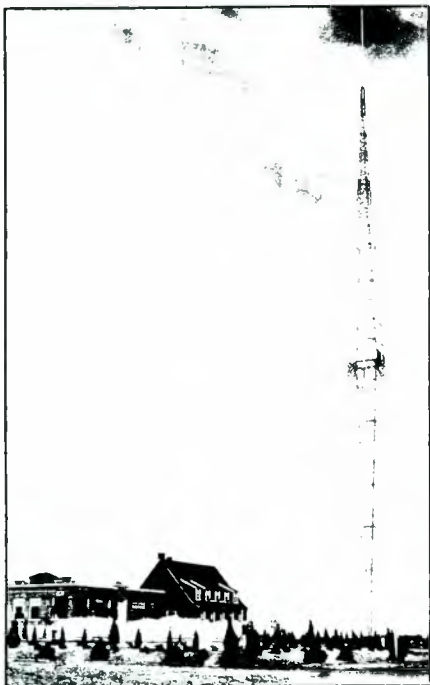

The WLW transmission facility as it appeared in 1934. With the flagpole on top, the tower extended 831 feet. The spray pond in the foreground was used to cool water for the 500kW transmitter.

the "golden era" of radio.

If you were to step back 50 years into the studios of a local station, you would find a much different world than the broadcast station of today: different equipment, different types of people and different business goals. Broadcasting of this era was more than just a business or a job. It was the profession of magic.

Radio had a distinctly formal air about it. Announcers, musicians and performers dressed in tuxedos or other elegant attire, even when there was no studio audience. Announcing was formal. Broadcasting was regarded as a grand production, almost theatrical in nature. Enunciation and vocal clarity were essential, partly because of limitations of the equipment, but also because of the tradition of the theater. This formality of attitude and style would remain a part of radio well into the 1940s.

Many local stations had staff orchestras, some for playing jazz, others for symphonic programs. A few stations had their own dramatic groups. Each station had its following of loyal fans who would structure their days around their favorite radio programs. Those were the days that brought radio to its peak of popularity and influence.

Nearly every station had several studios

of varying sizes. In New York and Hollywood, the networks used theaters for programs presented before audiences. Because audio consoles of stock design did not appear until the late 1930s, each station assembled its own facilities. Mixers were put together from individual faders. Amplifiers were stock items consisting of several basic types. Monitor loudspeakers were usually electrodynamics mounted in a baffle of no particular design. Performance left a lot to be desired.


The standard volume unit indicator (VU meter) was adopted by the industry in 1939. Before that, many different instruments were used to adjust program levels. Ballistic characteristics were far from standard, and the rectifier configurations inside the meters varied from model to model.

The mainstay of the studio was the venerable RCA 44 series ribbon. The microphone provided fairly good directional characteristics, but its size and vulnerability to wind noise limited its use mainly to inside pickups. Condenser microphones were used to some extent in the '30s. Compared with today's versions, the early condensers were large, heavy and prone to produce noise under humid conditions. Dynamic microphones also enjoyed

RUNNING OUT OF RACK SPACE?

1 3/4" PANEL HEIGHT — SERIAL CODE OUTPUT, FOR DRIVING SLAVES

CLOCKS

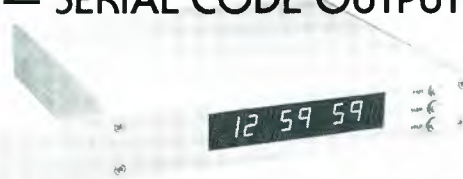

TIMERS



ES362 AP — UP/DOWN TIMER \$463

ES192AP/194AP — 12/24 HOUR CLOCK \$278 • ES520 60 MINUTE TIMER \$169

PRACTICAL SOLUTIONS FOR 17 YEARS 142 SIERRA STREET • EL SEGUNDO, CA 90245 • (213) 322-2136

Circle (85) on Reply Card

VIDEO SUPPLIES

CABLES • CONNECTORS • CANARE • BELDEN • SWITCHCRAFT • D.A.S. • TIES • BATTERIES • NEUTRIK • 60 INTERFACE BOXES • TAPE • 500 DIFF. TAPE LABELS • GAFFERS TAPE • CASES • PATCH BAYS • LIGHTS • ACOUSTIC FOAM • FORMS • MICROPHONES • SONEX • STANDS • MOUNTS • WIND SCREENS • ZEPPELINS • FIBRE OPTICS • RACKS • DUCT • REELS • TESTERS • FILTERS • CHEMICALS • TOOLS • CHAIR LIGHTS • DEGAUSSERS • INTERFACE DEVICES • HEADPHONES • CLIPS • SWITCHES • CANS & S-VHS CABLE

FREE!
America's most
unique catalog
for audio
and video!

MARKERTEK VIDEO SUPPLY
145 Ulster Ave., Saugerties, NY 12477 U.S.A.
TOLL FREE **1-800-522-2025**
In NY: 914-246-3036

Circle (86) on Reply Card

AS-101 AUDIO SWITCHER

- Illuminated and legendable control buttons
- Instant or overlap switching
- Front panel accessible level controls
- Optional RS-232 Interface
- Optional relay follow switch outputs
- Plug-in screw-clamp terminals

CONEX ELECTRO SYSTEMS

P.O. Box 1342 Bellingham, WA 98227 (206) 734-4323


Circle (87) on Reply Card



The old Voice of America master control room. Built in the early 1950s, the facility was used until recently to transmit programming in a wide variety of languages to the far-flung VOA system. The equipment shown was designed by Gates Radio to distribute 26 different programs simultaneously from 100 different sources. (Courtesy of VOA.)

New from AOR

**2000 Channels
5MHz to 1500MHz**

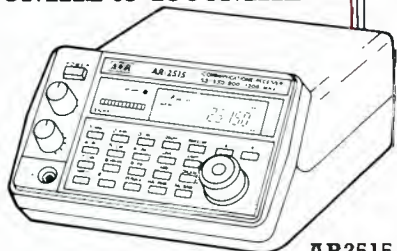

AR2515

- Covers 5MHz to 1500MHz in AM/FM/Wide FM modes. Continuous coverage.
- 2000 Channel Memory 1984 Scan Frequencies & 16 Search Groups
- Scan/Search speeds up to 36 channels or increments per second
- Built in RS 232 computer interface
- 25 Day Satisfaction Guarantee. Full Refund if not Satisfied
- Size 3 1/4" H x 5 1/4" W x 7 1/4" D. Wt. 2 lb. 10 oz.
- Supplied with AC & DC power cords. Telescopic antenna

Total Price: Freight Prepaid
(Express Shipping Optional)
*Upgrades of AR2002:
to AR2515 specs Available

\$695.00

ACE
COMMUNICATIONS

10702 E. 106th St. Indpls., IN 46256


Toll Free 800-445-7717

Visa and MasterCard
(COD slightly higher)

In Indiana 317-849-2570 Collect FAX (317) 849-8794



Receive the latest industry news on key market facts and trends with The S. Klein Newsletter on Computer Graphics

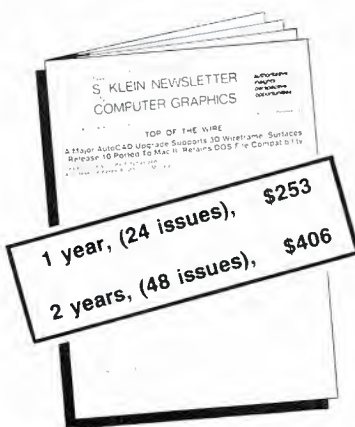

If you need incisive reports on developments in every key area of computer graphics and image processing as they happen—*The S. Klein Newsletter on Computer Graphics* is for you!

Twice a month, *The S. Klein Newsletter* cuts through the clutter to bring you up-to-the-minute news in the computer graphics industry. Through insightful, interpretive reports, you'll learn about the latest developments in:

- Animation & Visual Arts
- Business & Presentation Graphics
- CAD/CAM
- Research & Development
- Databases

You'll be among the first to hear about the latest technology—from hardware and software to systems and services. You'll receive reports on new companies as they are formed... applications as they are discovered... market trends as they begin... and much more!

Get the facts you need for profitable decision making... subscribe TODAY!

For more information, or to place an order, call Dan Baker at 1-800-666-GRAPHics or write: S. Klein Newsletter, Intertec Publishing, P.O. Box 12942, Overland Park, KS 66212

Circle (74) on Reply Card

FEATURED NOW AT A FACILITY NEAR YOU...

THE RLV.

The power, versatility and future of the laser videodisc has never been more evident.

The RLV Recordable Laser Videodisc from ODC is making the difference in an ever growing number of commercial, corporate and government video facilities.

It's because ODC's LaserVision industry standard RLV is a better, faster and more cost effective way to record, store and access broadcast quality video.

- **Prime Time Editing with RLVs**—Nearly half of all prime time episodic programs, plus many feature films and spots, are edited using RLVs.
- **Shows and Exhibits**—A/V presentations at trade shows and exhibits, as well as videowalls, are naturals for RLVs.
- **Corporate and Interactive Video**—The RLV is the cost effective answer for low volume use in business, government and education. For A/V data bases, in large random access libraries where confidentiality is critical, RLVs are in demand. RLVs can even act as a source for 1/2" and 3/4" duplication.
- **The RLV in Broadcasting**—Broadcasters are discovering that file footage, station IDs, graphics libraries and commercials stored on RLVs are far more practical and easy to manage than expensive tape systems.


The RLV is both a technical and commercial success. Imagine superb, broadcast quality videodiscs recorded and available for you and your client "in house." All accomplished with surprisingly low media costs. ODC recording systems are installed at leading edge commercial, government and corporate video facilities worldwide.

The RLV is the technology of the future. But it's here today. Call or write ODC... and let us prove it.



**OPTICAL DISC
CORPORATION**


Optical Disc Corporation
17517-H Fabrica Way, Cerritos, Calif. 90701
(714) 522-2370 Fax (714) 670-9356

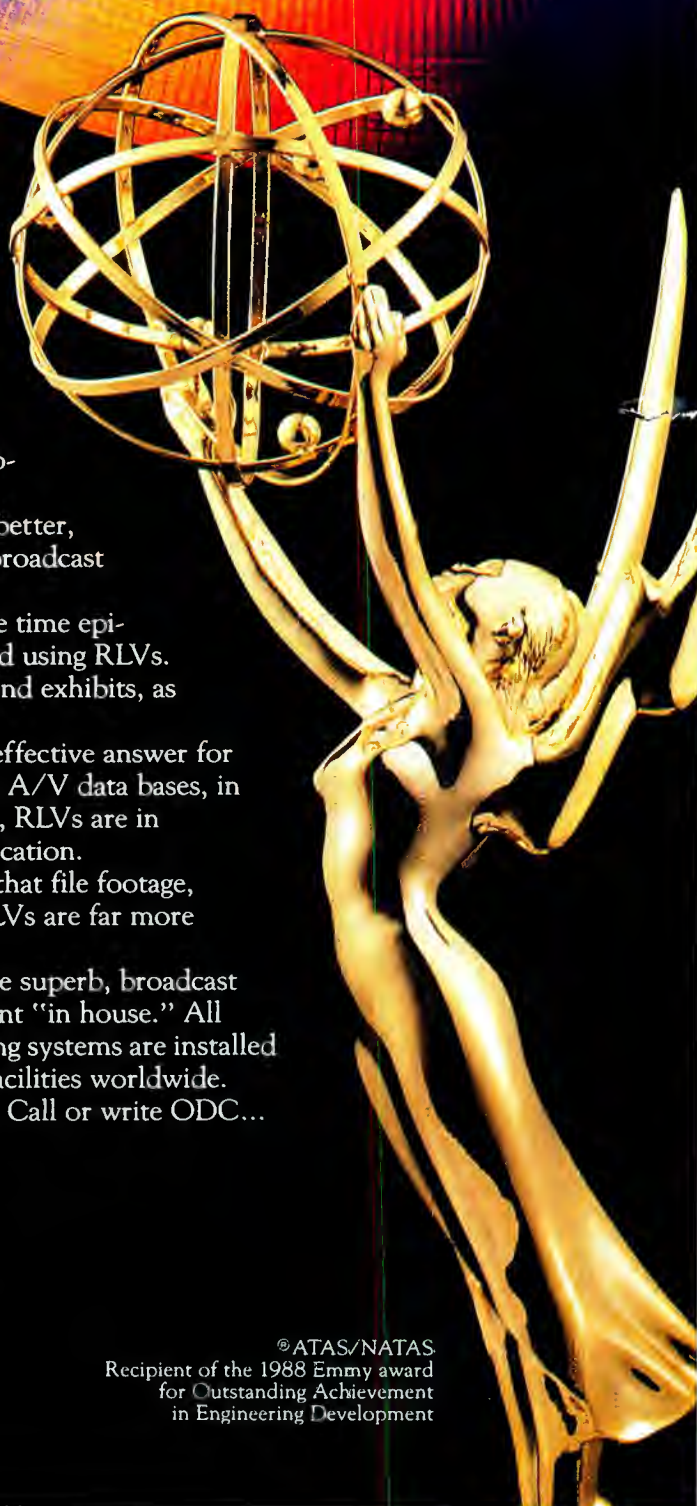

© ATAS/NATAS
Recipient of the 1988 Emmy award
for Outstanding Achievement
in Engineering Development

popularity, chiefly for remotes, because of their ruggedness.

For many years, phonograph records were frowned upon for actual broadcast use, partly because of questions regarding license and royalty matters. The main sources of recorded music were transcription libraries, which were leased to stations for use on the air. The 16-inch discs used various forms of modulation. Some

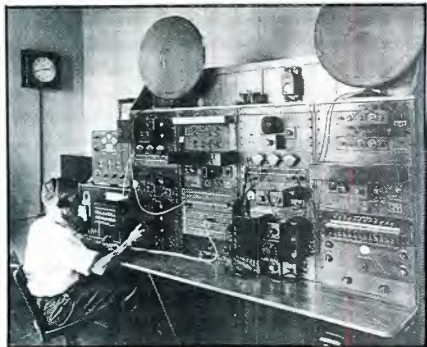

The master control room adjacent to WTIC's Grove Street studios in Hartford, CT (circa 1929). Programs from the studios were amplified and sent by telephone lines to the station's remote transmitter 12 miles away. Engineer Bob Coe is shown at the controls. (Courtesy of WTIC.)

used a vertical — "hill and dale" — cut, and others used a laterally modulated groove similar to that of modern discs. Turntables had to be large to accommodate the 16-inch discs; the machines were heavy for speed stability.


Remote amplifiers were back-breakers in the literal sense. These "portable" units weighed in at 35 to 40 pounds. Add to this several microphones, stands, cables and headphones, and you can see why only the bravest souls liked to do remotes.

The use of radio relay equipment was limited to frequencies between 1.6MHz and 3MHz. This required relatively long antennas, even when loaded with an inductance. Skywave effects also were a problem, frequently causing interference. Because AM was the only method available, the systems were highly susceptible to noise.

The origins of the networks

The formation and growth of the national radio networks is an exciting chapter in the history of broadcasting. The growth and prosperity of networks was linked tightly with the number of potential affiliates.

The giant RCA organization was the first company to recognize that the develop-

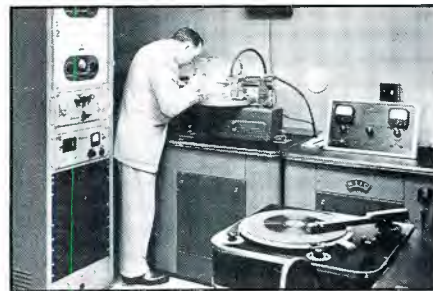

The introduction of audiotape recording revolutionized radio station operation. For many years after the introduction of the first recorders, stations continued to use their transcription equipment for a variety of purposes. Shown is a transcription system at WTIC (Hartford, CT), with engineer Al Jackson checking the transcription lathe. A "new" audiotape recorder can be seen to his left. (Courtesy of WTIC.)

ment of broadcast technology and management of broadcast services could best be performed by an independent organization. Accordingly, RCA, under the guidance of David Sarnoff, set the trend in network formation by creating the National Broadcasting Company in 1926. By the following year it had two divisions, the "Red" and "Blue" networks.

The origins of the Columbia Broadcast-

Does Your VO-6800 or AG-7400 Need Time Code?

**The P-1 Portable
SMPTE Time Code
Generator/Reader**

Fast Forward Video



**CALL YOUR LOCAL DEALER OR CONTACT US AT:
17955-F Sky Park Circle, Irvine, CA 92714 (714) 852-8404**

Circle (88) on Reply Card

dPatch
DIGITAL PATCHING
SYSTEM



**Only
\$950⁰⁰**

**NORMALING RS 422 EDITOR TO VTR
MACHINE CONTROL PATCHING**

**Call Jem-Fab to order your D Patch Model I
(516) 867-8510 • FAX 867-8007**

JF_c
Jem-Fab Corp.

Circle (89) on Reply Card

Same Day Transformers!

Our applications engineers help you select the best type for the job from over 70 models in stock, and we'll ship 'em **TODAY!**

jensen transformers
INCORPORATED

10735 Burbank Blvd. • North Hollywood, CA 91601
FAX (818) 763-4574 Phone (213) 876-0059
TELEX 6502919207 MCI UW
(Mon-Thurs, 9am-5pm Pacific time)

Circle (90) on Reply Card



The transmitting facilities of WEFM, Chicago, one of the first stations to begin broadcasting in FM stereo. WEFM switched on its stereo generator at midnight, June 1, 1961, the earliest time authorized by the FCC to begin stereo operation.

ing System (CBS) can be traced back to 1926 and a company called United Independent Broadcasters (UIB). The firm came close to bankruptcy several times during its first year or so of operation. One of the organizations that kept UIB afloat for awhile was the Columbia Phonograph

Company. When the record company sold back the interest to the original investors, they retained the name Columbia Broadcasting System. In 1927, William Paley became interested in the fledgling company, and decided to invest in it and help run it. The rest, as they say, is history. Incidentally, in 1938 CBS bought the Columbia Phonograph company (now Columbia Records) and held it until recently.

In 1934, the Mutual Broadcasting System was created to serve the increasing number of radio stations on the air at that time. During the 1940s, two additional radio networks were founded — the DuMont Network (1946) and the Liberty Broadcasting System (1949). They played an important role in the broadcast industry of their time, but later bowed to the giant networks and their well-established affiliates.

In 1943, Edward J. Nobel bought the NBC Blue Network (operated by NBC) and renamed it the American Broadcasting Company. The sale to Nobel was prompted by a federal antitrust ruling. The sale price to the Life Savers candy manufacturer was \$8 million. In 1953, the company was merged with Paramount, providing the network a valuable entry into the telefilm business.

FM radio was the forgotten stepchild of

broadcasting until the early 1960s. The awakening came as the result of FM license allocation changes and stereo transmission. In 1962 the FCC revised its commercial FM rules to divide the United States into three zones (instead of the previous two). Three classes of commercial FM stations also were created. Until the '62 decision, FM stations were authorized on the basis of protecting the predict-



Whatever happened to the storefront studio? During the 1960s and early '70s, the show-window control room was a popular method of attracting public awareness of a station. Today, noise problems and concern for security have all but eliminated the practice.

CINE 60 SUN-GUN


Beautifully Simple

Beautiful . . . because it's fresnel-soft and uniform — ideal for video. And simple because . . . if 250 Watts is too much, change to 150 Watts. Need more? Go to 350 Watts. Want to go really light? Use 10CW (12V) or 70W (14.4V). Outdoors, swing-in the built-on Daylight Filter. You color correct instantly! Indoors, swing away Filter and you have tungsten light! Never a need to readjust: camera color controls here! For focus, vary the beam from 8 to 14 ft. For power, choose from 84 Battery Belts and Battery Packs. And, to make it beautifully simple . . . we put it all together for you in any one of 48 Portable Sun-Gun Kits, including Switchable 30V/14.4V combination Kits. See your dealer or send for data, today.

CINE 60

630 9th AVE
NEW YORK, N.Y. 10036
212 / 556-8782

1050 CAHUENGA BLVD.
HOLLYWOOD, CALIFORNIA 90038
(213) 451-3045




Circle (78) on Reply Card

Ask for our
FREE CATALOG
OF PROFESSIONAL
Sound RECORDING
& DUPLICATING SUPPLIES




Blank-Loaded
AUDIO CASSETTES




CASSETTE BOXES
LABELS • ALBUMS

ACCESSORIES
from
3M • EDITALL



AGFA AMPEX
3M Scotch
TDK maxell
TAPE



Polyline™ Empty
REELS & BOXES

Polyline Corp.

1233 Rand Rd. • Des Plaines, IL 60016
(312) 298-5300

Circle (79) on Reply Card

ed service contours of existing stations. The new rules, however, changed the FM assignment scheme to one requiring minimum mileage separations between stations.

In 1963 the "table of assignments" for commercial FM stations was created, and nearly 3,000 assignments were made to nearly 2,000 mainland communities. Assignments in Alaska, Hawaii, Puerto Rico and the Virgin Islands were added in 1964.

The new scheme enacted by the commission was not universally popular, however. Some FM stations on the air at the time were faced with having to reduce their power level and/or antenna height to meet the new guidelines. Stations operating at high powers — 125kW ERP was not uncommon — protested and sought to gain public support. In Northern California, for example, stations that were to be influenced by the new rules organized an appeal to listeners, which was broadcast simultaneously on the stations. All the stations to be affected reduced their power during the broadcast to show the public the negative impact such a reduction would have on service.

The effort was copied in Los Angeles and other markets. Finally, in 1963, the grandfather rights of stations that had



Satellite distribution systems have provided expanded flexibility for radio networks. The number of networks offering programming of various types also has increased. Shown is the switching control center of ABC Radio in New York. (Courtesy of ABC.)

CABLE REELS built for the professional environment

- Extremely durable tubular steel construction
- Heavy-duty, permanently lubricated bearings
- Stackable or with casters
- 3-position brake
 - lock for transporting
 - soft brake for spooling out cable
 - free wheeling for fast rewind

Request Canare's full line Cable & Reel Catalog.



CANARE T.M.


CANARE CABLE, INC.

832 N Victory Blvd. / Burbank, CA 91502 (818) 840-0993

Circle (83) on Reply Card

ZERO LOSS VIDEO DELAY

[bvs] DL 705 SERIES

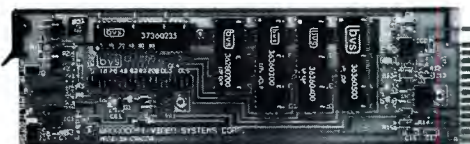

- Transparent video timing
- Delays from 10 ns to 1945 ns via jumpers and fine trim
- Up to 12 cards in 2 RU frame
- Looping input, 2 outputs per card
- Input and output return loss better than 40 db
- Flat response to 5.5 MHz
- Phase equalized
- Versions to plug directly into popular DA frames

broadcast video systems ltd.

40 West Wilmot Street, Richmond Hill, Ontario L4B 1H8
Telephone: (416) 764-1584 Telex: 06-964652 Fax: (416) 764-7438

Circle (80) on Reply Card

Free Catalog & Audio/Video Applications

Mic, EO, Line, Tape, Phono, Osc, Trans., Video, ACN, Pwr. Supp.

Routing Switchers (St-A/V)
(24, 16, 12, 8, 4, 2 stations)

Press Boxes
1-In/16-out Video/Audio
2-In/24-out Audio

Video & Audio Dist. Amps.
RGB-Sync Dist. Amps.

OPAMP LABS INC (213) 934-3566
1033 N Sycamore Av LOS ANGELES CA, 90038

Circle (81) on Reply Card

PRECISION MAGNETIC TEST TAPES

STL



Standard Tape Laboratory, Inc.
26120 Eden Landing Road #5, Hayward, CA 94545
(415) 786-3546

Circle (82) on Reply Card

'SBE '89'

October 5-8
Kansas City Convention Center

Register now for the SBE National Convention

■ Kansas City—known for its jazz legends, beautiful fountains, great steak and Harry Truman. And, this year host to the 1989 SBE National Convention and **Broadcast Engineering** Conference.

The professional audio/video industry is changing rapidly. To stay ahead today, you need to know where technology is heading. Find out at the '89 SBE convention.

This year in cooperation with major manufacturers, special hands-on train-

ing sessions will be available. Other comprehensive sessions will bring you up to date on the latest developments important to your job including digital technology for audio and video, satellite uplinking and high definition television. A seminar on worker safety is also on tap. Plus, a convention center full of the latest audio and video products.

Plan for your future now by attending the 1989 SBE National Convention and **Broadcast Engineering**

Conference, October 5-8. Take in the show, and while you're in Kansas City, take in the sights! ■



KANSAS CITY

power in excess of Class B limits were granted.

The second spark that made FM come alive was stereo. Although stereo audio dates back to experiments performed over wire lines by telephone engineers in the 1880s, real development came only with post-World War II technology. In 1959, the National Stereophonic Radio Committee was created to examine the many proposed systems of transmitting FM stereo and to submit a final recommendation to the FCC. In the summer of 1960, six systems were field-tested over KDKA-FM in Pittsburgh, with receivers set up at Uniontown, PA. The system proposed by General Electric and Zenith was adopted, with broadcasting authorized to start on June 1, 1961.

The first stations to begin stereophonic programming under the new rules were, quite appropriately, WGHM, Schenectady, NY (owned by General Electric), and WEFM, Chicago (owned by Zenith).

Circular polarization of the transmitted signal was another major step for FM radio. One of the early proponents was KPEN-FM, Atherton (on the San Francisco Peninsula), which later would become

KIOI (better known as K-101), San Francisco. KPEN received a special temporary authorization from the FCC late in 1963 to start testing the effects of adding a vertical component to the existing horizontal signal.

A second Western Electric 10kW transmitter was purchased and modified to provide the needed power. Separate vertical dipoles were manufactured and installed on the station's tower. With this setup, engineers were able to vary the phase relationship and amplitude so that the station could switch from a horizontally polarized signal to a circular pattern. Monitoring points were established in rugged areas of San Francisco to observe the results. It was found that as the vertical component of the transmitted signal was increased, reception of stereo signals improved significantly.

At the same time, Lew Wetzel of WFIL-FM was proving to the commission that the vertical component of a circularly polarized transmission did not extend the 1mV contour. With these two reports, the FCC decided that it would indeed be in the public interest for FM stations to transmit with circular polarization.

Bibliography

- "Radio Pioneers." *Broadcast Engineering*, May 1979.
- Nelson, Cindy. "RCA Demolishes Last Antenna Tower at Historic Radio Central." *Broadcast Engineering*, February 1978.
- Burke, William. "WLW: The Nation's Station." *Broadcast Engineering*, November 1967.
- Riggins, George. "The Real Story on WLW's Long History." *Radio World*, March 8, 1989.
- "The Last 20 Years at the FCC." *Broadcast Engineering*, May 1979.
- Gabbert, Jim. "Case Study: K101, an FM Pioneer." *Broadcast Engineering*, May 1979.
- Dorschug, Harold. "The Good Old Days of Radio." *Broadcast Engineering*, May 1971.
- Wallechinsky, David, and Irving Wallace. *The People's Almanac*, No. 2, Bantam Books, 1982.
- "WTIC: Radio to Remember." WTIC 60th anniversary publication.
- Schubin, Mark. "From Tiny Tubes to Giant Screens." *Video Review*, April 1989.

| : { =) |||

RECORDER CASES




► Often imitated, never surpassed, Porta-Brace continues to bring new developments in recorder case design. The new look includes: longer reinforced front pocket, zippered cassette door, microphone holster, line power supply pouch, leather shoulder strap, Piggin Strings and more. **Call for information on the case for the New Sony VO-8800.**



K & H Products, Ltd.

Box 246 PHONE 802-442-8171
North Bennington FAX 802-442-9118
Vermont 05257, USA

Circle (95) on Reply Card

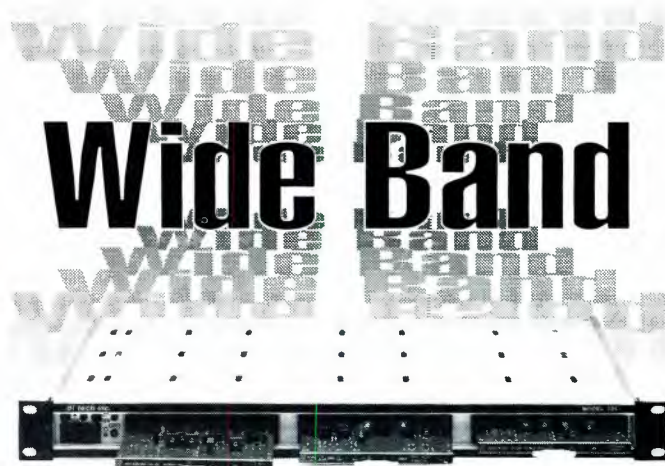

Video Distribution +/- 0.75 dB @ 60 MHz!

Model 220

- 1 input, 6 output
- high performance spec.
- +/- 3 dB gain

Model 222

- Switchable Clamper
- Eq. to 1000' 8281 cable
- Slew rate > 250 V/μsec.

**Moderately Priced. Ideal for
HDTV, RGB and all general uses**



di-tech

48 Jeffryn Boulevard, Deer Park, NY 11729
Tel: (516) 667-6300 • Fax: (516) 595-1012

Circle (96) on Reply Card

Continued from page 114

ternational sales for Broadcast Electronics and has been chief engineer of three separate AM and FM stations.

Kelly wants to see the national office relocated to Washington and promises to work for growth of the national convention. He was involved in planning the first conventions during his earlier service to SBE.

- *William C. Hineman*, director of operations at WTHR-TV, Indianapolis, seeks a seat on the board. He is past vice president of Chapter 25 and a member of the national certification committee. Hineman would like to work on the professional licensing issue and SBE certification. He has been a broadcaster since 1960.

His goals include actively pursuing legislation to prevent states from imposing arbitrary licensing regulations on broadcast engineers. He also would work toward universal acceptance of SBE certification as an evaluation standard.

Selecting your candidate

SBE members are advised to choose their candidates carefully. You are encouraged to question the position of the candidates directly. The candidates' telephone numbers are available at the SBE national office (317-842-0836).

Questions you might ask the candidates include the following:

- Does the candidate have a track record of service to the society?
- Has the candidate served his local chapter?
- Have incumbents been responsive to their own goals and priorities for the SBE?
- Have incumbents attended the twice-yearly board meetings?

In addition to the slate approved by the SBE nominating committee, another candidate will appear on the ballot for president. By a petition of 10 SBE members, Paul Montoya requested that he be added to the ballot for SBE president.

He is chief engineer at KXKL-AM/FM, Denver, and is past chapter chairman of Chapter 48. He holds technologist-level certification. Montoya's goals include better communication with members and the national convention. His petition was filed too late to be included in the slate of officers listed in the August "SBE Update" column.

Editor's note: Additional information regarding SBE activities is available on CompuServe. IGO BPFORUM

| : (-) | | | | |

Broadcast Supply West,



East, North & South.

As a company that serves the nation's broadcasters, we have often considered opening regional offices to improve our service or expand our sales. In the final analysis, we determined that regional offices would only serve to retard service and drive our overhead sky high. So here we are in the west, maintaining the most efficient and economical distribution system in the broadcast industry. Regardless of your location, you benefit by saving money, enjoying quick delivery, and receiving exceptional service. We are open 12 hours daily, 9 a.m. to 9 p.m. east, 6 a.m. to 6 p.m. west so you can call us at your convenience for all your audio equipment needs.

From any point on the compass, BSW is as close as your telephone.

BSW

BROADCAST SUPPLY WEST

America's Full-Time Broadcast Supplier

1-800-426-8434

ORDERS • INFORMATION • SPECIFICATIONS
BSW • 7012 27th Street W • Tacoma, WA 98466 • FAX 206-565-8114

Circle (84) on Reply Card

September 1989 *Broadcast Engineering* 133

New products

Visual effects option

Abekas Video Systems has introduced the Touch-Up, an option to the A60 digital disk recorder. Control is available from the paint system artist's tablet, which provides rotoscoping, animation and retouching of digital images stored on the recorder.

Circle (350) on Reply Card

Weather systems

Accu-Weather provides Accu-Strike lightning graphics data on national and regional map backgrounds. Also available on individual custom backgrounds, the information is provided in formats for PC-compatible, Macintosh, Commodore and various other computer systems.

Circle (351) on Reply Card

Public service receiver


ACE Communications has introduced the AR950 100-channel scanning base and mobile receiver, which accesses public service radio frequencies in both VHF and UHF bands for police, fire and other emergency services. It operates on 120Vac or 12Vdc. A telescoping whip and flexible rubber antenna for 800MHz also are included in the package.




Circle (352) on Reply Card

Automated message source

Allied Broadcast Equipment and *Interalia* have introduced The Voice. It offers listeners an automatic message system for weather, concert or other information. The solid-state memory allows short commercial messages to be quickly tagged onto primary messages to bring in additional revenue. The unit interfaces directly to telephone lines and provides easy changing and relinking of messages.

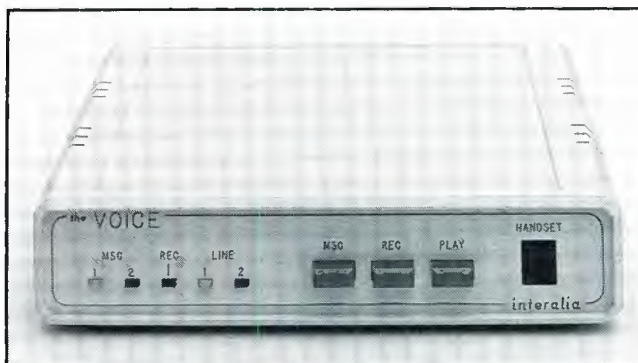

Circle (353) on Reply Card

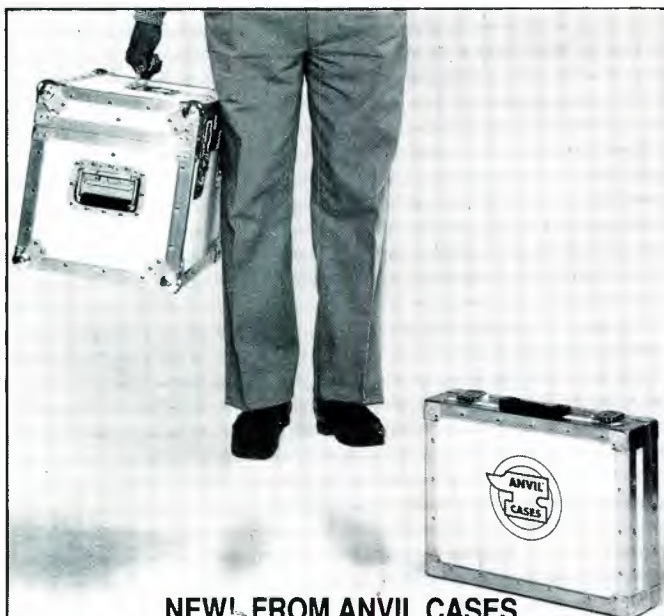

NEW! FROM ANVIL CASES THE "LITE LINE"™

- Built 30% lighter, but just as strong – and costs 25% to 30% less than Anvil A.T.A. cases
- Building quality cases since 1952

Call Today For More Information



4128 Temple City Blvd. • Rosemead, CA 91770 • (800) 423-4279 • CA: (800) 242-4466 or (818) 575-8614

Circle (92) on Reply Card

TIMECODE EDITING... LIVING DANGEROUSLY?



Not if you have the new ADx-02 Timecode Analyzer. This is a sophisticated test instrument, as well as a fully functional reader-generator with video Key and L.E.D. displays. It can save you time and money. Finding timecode errors on tape before an edit is attempted, or matching color frames and ScH phase, or tracking on a Betacam is easy. For the engineer, it can be the quickest way to set tape speed, realign video play-back heads or check an audio synchronizer for wow. Each timecode bit is displayed graphically.

The ADx-02 is being used around the world in a variety of environments and applications. But the diagnostics function is not the end of the story, the ADx-02 is a very versatile timecode reader-generator-insert, with multiple screen displays, selectable fonts, three jam-sync modes, stable code generation, full speed range read and much more. So why buy just a timecode reader-generator?

The ADx-02.

The only timecode unit that can safely save you money.

ADx Systems Inc.
274 Madison Avenue, New York, NY 10016
The World Leader in Timecode.

For more information contact your local dealer or call us at 1-800-444-4-A-D-X.

Circle (93) on Reply Card

Portable monitor/test unit

American Broadcast Systems has introduced the NuTronics TC-10 Bug Catcher. The portable video level monitor and test unit uses LEDs to indicate video level and presence of color and monochrome video signals as well as burst and sync. It is available with a leather carrying pouch, and fits into a shirt pocket.

Circle (354) on Reply Card

Stereo microphone

AMS/Calrec has introduced the M/S stereo microphone. Its associated control unit, powered from 110-240Vac, internal C cells or phantom power, gives the instrument a range of flexibility from variable patterns. The patterns include omni to figure 8, L/R or M/S output signals, variable angle control from 0° to 180° and high source-level attenuation.

Circle (355) on Reply Card

Coaxial test cable

Andrew has introduced the type 39812-11 HELIAX coaxial test cable assembly. The cable is constructed of FSJ1-50 super-flexible 50Ω material with SMA 41SWS male connectors. It can be used as a jumper in equipment racks where RF interference presents problems.

Circle (356) on Reply Card

HDTV monitors

Barco Broadcast Division has announced the HD-MONITOR 5153, a 20-inch HDTV monitor for broadcast and post-production facilities. For resolution greater than 1,000 lines, the scan system adapts to various high-definition scan requirements over a range of 28-33.75kHz. RGB inputs are used for component processing.



Circle (357) on Reply Card

Automated signal routing

Azimuth Productions has introduced a series of computer-automated patching systems. Connections to a console can be reconfigured by SMPTE pulses, MIDI triggers or the touch of a control button. Patch patterns are stored on an integral 3.5-inch disk drive with configurations shown on an HR color monitor or ink-jet printer hard copy.

Circle (358) on Reply Card

Solve your intercom interface problems forever.

CLEAR-COM

TW-12B

System Interface



** Interfaces: Clear-Com to RTS*

RTS to Clear-Com

Clear-Com to Clear-Com

even RTS to RTS

** Easy, fast, accurate routing - up to 42dB!*

** Matches system levels - even between incorrect or multiple terminations!*

** Transformer isolated/opto-coupled to eliminate ground loop hum, buzz and noise!*

Call Clear-Com or your local dealer for details



Clear-Com
Intercom Systems

945 Camelia St.
Berkeley, CA 94710
415/527-6666

Circle (91) on Reply Card

WE'VE MADE DEAD AIR A DEAD ISSUE.

There are worse things in radio than dead air. But not many.

And if your CD players aren't built to resist tracking errors, you could find yourself listening to some very embarrassing silence.

Not with the new CD-701 from Tascam. Its unique disc clamping system is a technological triumph that virtually eliminates disc vibration. So you never hear the awful hush that means a tracking error has occurred.

What you do hear is the finest sounding CD unit you can buy, with the same proprietary "ZD Circuitry" praised by two of Japan's top audio magazines* for eliminating low-level digital distortion.


Then there's the optional RC-701 Remote Control with Auto Cue so you can cue to the music instead of the track (for even less dead air). Or you can add the Ram Buffer for true, instantaneous startup.

And with four times oversampling and 16-bit D/A converters in an extra-rugged chassis, the CD-701 is superbly designed for the broadcast environment.

Can a CD player really deliver this kind of performance, track after track, disc after disc? Only if it's a Tascam.

Contact us or visit your Tascam dealer for more information about the CD-701. And take the sounds of silence off your playlist.

TASCAM

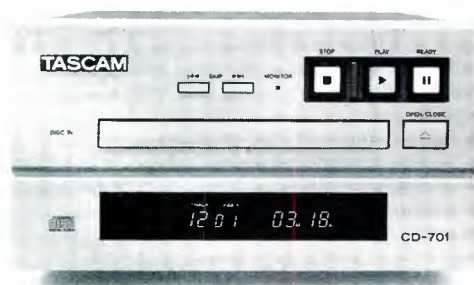

©1989 TEAC America, Inc., 7733 Telegraph Road, Montebello, CA 90640, 213/726-0303
*Radio Technology Component Grand Prix '88, CD Division, Stereo Sound Component of the Year (1988) & Best Buy (1988)

Circle (104) on Reply Card

Wireless headphones

beyerdynamic uses infrared light to drive the IRS 690 wireless headphones. An infrared transmitter with wide-angle transmission path drives the DT990 Pro headphones. FM modulation at a carrier frequency of 95kHz/250kHz brings 20Hz-20kHz audio response to the headphones. Power for a 9V battery in the receiving unit is derived from the transmitted signal.

Circle (359) on Reply Card

High-power couplers

Bird Electronics has introduced a series of coaxial directional couplers that cover frequencies from 125MHz to 2GHz. The 12 different units of the series sample forward power in the transmission system, without undue disruption of power sent to the transmitting antenna. The 200W units provide 10dB to 30dB coupling without probes.

Circle (360) on Reply Card

Computer-prompting system

Blue Feather Company has announced the Portaprompt XTE-3, a portable teleprompter that provides IBM PC compatibility. Features include a remote-script speed control for talent operation. The system includes computer, monitor, camera display software, remote control and all accessories.



Circle (361) on Reply Card

Digital patch fields and CCD/tube resolution

Brabury Porta-Pattern International (BPI) has introduced the following products:

- The PDJ-101 digital video jackfield is housed in a 2RU 19-inch rack panel. It provides 10 male/female pairs of 25-way D-type connectors. Connectors with slide-lock posts are used, but screw-lock versions may be supplied.
- Two resolution charts for use with CCD and tube cameras include the concentric, 001-50, and radial, 001-51, resolution charts, which are designed for CCD pickup devices. Both are available in 9x12 field, 18x24 Dura Chart and illuminator transparency forms.

Circle (362) on Reply Card

Utility light

Cool-Lux Lighting has introduced Astro-Lux. The 1-piece light includes a 22W quartz halogen lamp with a battery to operate it for 40 minutes. A diffusion lens softens the 3,250°K light.

Circle (363) on Reply Card

Antenna brackets

Bogner Broadcast Equipment has developed a series of brackets to sidemount low- and medium-power UHF antennas. The brackets are designed for each tower installation to simplify the rigger's job of attaching the antenna to the tower. The brackets also provide additional distribution of windloading and the stresses caused by the antennas.

Circle (364) on Reply Card

Voice-over auditioner

C.A.S.T., a computerized audition service for talent, allows voice-over talent to leave samples based upon prerecorded voice prompts (straight announce, character, narration, etc.). You use the telephone keypad to review digitally recorded audition samples and make voice selections.

Circle (365) on Reply Card

HDTV image enhancer

BTS has introduced the CPH 1000 digital image processor. The HDTV sharpness corrector provides independent adjustment of H and V filtering as well as diagonal filtering characteristics with variable noise suppression and linear and level-dependent gain controls.

Circle (366) on Reply Card

Portable oscilloscope

Createc Signal Computer has introduced the SC-04 hand-held instrument combining digital oscilloscope, frequency counter and multimeter functions. The unit may be controlled from a personal computer and provides a Centronix output for waveform, data and setup parameter printouts.



Circle (367) on Reply Card

THIS PRODUCTION ASSISTANT WILL NEVER ASK FOR TIME OFF.

Twenty-four hours a day, seven days a week. That's the kind of dedicated service you can expect from the new 3030 quarter inch recorder from Tascam.

The 3030 is a real studio workaholic, designed to do a little of everything, and do it well. At only \$2,299*, one of the things it does best is save your budget.

From its proprietary heads, offering extended headroom and quieter recording, to its built-in dbx type I professional noise reduction, the 3030 delivers sound you can count on, time after time.

Whether you're fine-tuning for a particular kind of tape, or just matching previous recordings, you'll appreciate the 3030's choice of on-air or production-quality tape speeds, and the switchable print levels.

Split second cueing decisions are no problem, thanks to micro-touch pushbuttons, while Auto Cue Mark, Duplesync, and Tape-Run-Time counter simplify your spot production. Mic inputs make direct voice-overs a breeze.

And with balanced and unbalanced inputs/outputs, the rack-mountable 3030 slips easily into any existing system.

Contact us or visit your Tascam dealer for more information about the 3030. It turns out, good help isn't hard to find after all.

TASCAM



© 1989 TEAC America, Inc., 7733 Telegraph Road, Montebello, CA 90640, 213/726-0303
*Manufacturer's Suggested Retail Price

Circle (94) on Reply Card

September 1989 *Broadcast Engineering* 137

MOTORISED FADERS – THE WAY AHEAD

Penny & Giles motorised faders – the way ahead for the new generation of manual and automated mixing consoles. Just part of Penny & Giles' comprehensive range of audio and video controllers.



- rapid response to commands
- sensitive manual control ■ digital, VCA or analogue compatible ■ update signalling incorporated ■ positioning repeatability 0.5mm

Penny & Giles audio and video controllers are renowned for high quality and reliability, and are used by the world's leading broadcasting and recording organisations. For further information and technical data contact us on (213) 393 0014.



Penny+Giles

Penny & Giles Inc

2716 Ocean Park Boulevard #1005
Santa Monica California 90405 USA
Tel: (213) 393 0014 Telex: 858866
Fax: (213) 450 9860

SEE US ON BOOTH

460
AES NEW YORK

Circle (103) on Reply Card

Production music libraries

Capitol Production Music has released volumes 4 and 5 to the Optional Line CD music library, containing selections from classics or famous titles and sounds from around the world. The One-Stop Broadcast series is a 15-CD collection with 18 hours of 60-second, 30-second and 10-second variations and theme sets.

Circle (368) on Reply Card

Cable protector

Catamount Manufacturing has introduced a grommet material to protect cables passing through sharp-edged holds in panels or racks. Available in various sizes, the material has a groove that slips over the sharp edge to prevent abrasion.

Circle (369) on Reply Card

Vehicle mount

Cinekinetic Pty. has introduced the Cine•Saddle, a vehicular camera-mounting system. Made of water-resistant canvas, the 4-pound device molds itself to the shape of the camera in use and attaches to the vehicle with special clips and anchors. The mounting device has applications for many other hard-to-accommodate situations.

Circle (370) on Reply Card

Intercom interface and wireless intercom

HM Electronics has introduced the following products:

- The RW760 interface connects the HME 700 intercom products to 2-wire, 4-wire, non-compatible 3-wire and telephone intercom systems. A modular phone plug is used. In operation, the interface is capable of capturing and holding a telephone line. An ac adapter is available.
- The 8000 series wireless intercom consists of a base station, two Communicator transceivers, a battery charger and batteries. Any number of the dual-channel Communicators can be used with the wall-mount or tabletop base station.



Circle (371) on Reply Card

CAD interface and fonts

Digital Arts has introduced the Solid Design software, which allows CAD systems to create B-Rep solid models from 3-D wireframes for import into DGS software. The software supports DXF, CADL and IGES file formats. In addition, more than

100 PostScript-compatible fonts are available for the DGS graphics systems providing immediate resizing without loss of resolution.

Circle (372) on Reply Card

Time-code readers

Denecke has introduced the TC-MAXI and TC-MIX studio time-code reader units. Both provide variable intensity of the 4-inch LED display, showing SMPTE or EBU LTC information from 1/20th to 50 times reverse and forward speeds. TC-MAXI reads hours, minutes, seconds and frames. TC-MIX shows only minutes and seconds.

Circle (373) on Reply Card

Expanded data storage

Digital F/X has introduced a removable cartridge disk drive as additional data storage capacity for its DF/X 200 and Composium integrated production systems. The 40Mbyte units are accommodated by a slot in the DF/X 200 chassis. The 5 1/4-inch cartridges are available preformatted. A starter cartridge is included with the kit and includes generic background images.

Circle (374) on Reply Card

Bias lighting

EEV has introduced an integral variable light bias control for the XQ1410 TV camera tube. Bias lighting reduces picture smear and increases tube life. The lamp, mounted in the base of the tube, is routed to the rear surface of the target through light pipes.

Circle (375) on Reply Card

Extended battery power


Horizon Entertainment has introduced the Bat/Pak BP-12/30 30Ah battery pack designed for use in powering any 12Vdc equipment with an adapter to support equipment that requires less than 12V. For extended remote productions or higher-current requirements, the sealed lead-acid battery is packaged in a custom flight case covered with fiberglass. Both XLR and cigarette lighter output receptacles are provided. An optional automatic charger also is available.




Circle (376) on Reply Card

OTARI®

Technology You Can Trust



MKIII-8



MX-55

REVOX • marantz • TASCAM

CALL US !!!

TOLL FREE (800) 356-5844

Local / Consultation: (608) 271-1100

Audio - Video - Lighting Equipment & Supplies



5618 Odana Road Madison, WI 53719-1208

Circle (97) on Reply Card

STOP GROUND-LOOP HUM!

VIDEO HUM STOP COIL...HSC 2

Will ELIMINATE HUM and other INTERFERENCE in Video Lines caused by differences in Ground Potential.

- Rack Mountable.
- FLAT-DC to 6.5 MHz.
- No low-Freq or Hi-Freq. Roll-off.
- No Differential Phase Distortion.
- No Differential Gain Distortion.
- No Envelope Delay.
- Passive Device - Failure Free-Low Price.
- Small Compact Package 4" x 4" x 2-1/4".


ELIMINATES HUM AND INTERFERENCE:

IN STUDIO


- Between Buildings
- On long runs in Buildings
- Between Studio and Transmitter
- On Incoming Circuits
- On Outgoing Circuits

IN FIELD

- Betw. Remote Truck and Telco
- Betw. Remote Truck and Microwave
- For Intertruck Hookup
- For VTR Units
- For Monitoring Lines



NEW!



Available on
10 day free trial

AUDIO-VIDEO ENGINEERING COMPANY
65 Nancy Blvd., Merrick, N.Y. 11566
Tel. (516) 546-4239

Circle (98) on Reply Card

Five Easy Pieces

Now there's a whole new concept in modular editing systems—expansion without obsoleting equipment or expensive hardware investments.

QUANTA Editing Products presents five easy-to-expand, totally-compatible systems in one dynamic, new chassis design.

Find out more at SMPTE. Powerful performance at an affordable price was never so easy!

QUANTA Editing Products
by Calaway Engineering
535 Race Street, Suite 140 · San Jose, California 95126
(408) 295-8815

DYNATECH Broadcast Group

Circle (39) on Reply Card

ISA modules

Focusrite Audio Engineering supplies ISA audio-processing modules directed primarily at multitrack studios. The series includes the ISA 130 dynamics processor, 110/115 mic pre-amp/4-band equalizers with filtering, 116/116L remote-controlled mic amps and 131HD twin-channel dynamics unit.

Circle (377) on Reply Card


Glare protection

Hoodman has introduced the HVF37 Eclipse view-finder hood. Folding flat for storage and weighing less than one pound, the nylon material wraps around any camera view finder. Fiberglass stiffening and nylon hook-loop fastening secures the hood into a cylindrical shape to exclude sun and glare from all sources.

Circle (378) on Reply Card

TBC with options

Hotronic has announced optional packages for the AH91 dual-channel TBC and frame synchronizer. Specifically, a serial interface (RS-232/422) and stereo audio switcher are not available, allowing editors to control all digital functions from the AH91 control panel. The audio may be switched separately from video or automatically follow the choice of A or B channel video.

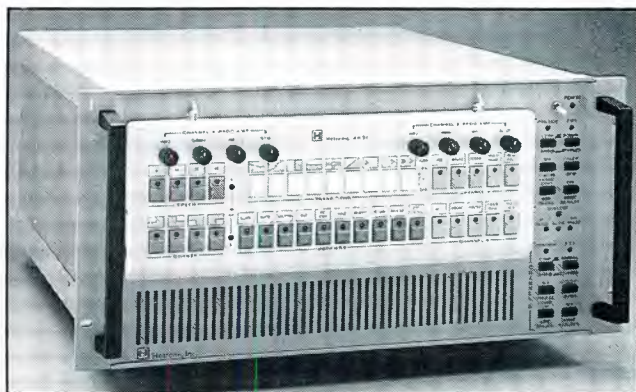

Circle (379) on Reply Card

Equipment bags

K & H Products has added a 25-inch size to its Run Bag series. Dividers in the bag create three compartments in addition to expandable cable pockets on each side and Velcro closure pockets for notes, maps or other small items. The bags include leather grip handles and 2-inch-wide shoulder strap.

Circle (380) on Reply Card

Computer video encoders

Lyon Lamb Video Animation Systems offers the ENC-7 color video encoder with sync generator and RTC real-time converter for conversion of higher scan-rated signals to NTSC or PAL timed composites. The encoder produces composite, component and S-VHS video with or without gen-lock. The real-time converter processes 23kHz to 75kHz signals to maintain proper geometric proportions without image distortion.

Circle (381) on Reply Card

1:7-)))

Professional services

VIR JAMES P.C.
CONSULTING ENGINEERS
Applications and Field Engineering
Computerized Frequency Surveys
3137 W. Kentucky Ave. — 80219
(303) 937-1900
DENVER, COLORADO
Member AFCCE & NAB

USED EQUIPMENT
The Largest Dealer In The World
PRO VIDEO & FILM EQUIPMENT GROUP
PHONE 214-869-0011 FAX 214-869-0145

EVANS ASSOCIATES
CONSULTING TELECOMMUNICATIONS ENGINEERS
AM-FM-TV-CATV-ITFS-LPTV SATELLITE
216 N. Green Bay Road
Thiensville, Wisconsin 53092
Phone: (414) 242-6000 Member AFCCE



- TERRAIN SHADOWING
- POPULATION DENSITY
- CONTOUR COVERAGE
- SPECIALS

(301) 652-8822

(800) 368-5754

D. L. MARKLEY
& Associates, Inc.
CONSULTING ENGINEERS
2401 West Moss Ave.
Peoria, Illinois 61604
(309) 673-7511
Member AFCCE

K. BLAIR BENSON
Consultant
Television Technology
23 Park Lane
Norwalk, CT 06854
203-838-9049

TEKNIMAX

TELECOMMUNICATIONS

DENNIS R. CIAPURA
PRESIDENT

11385 FORESTVIEW LN.
SAN DIEGO, CA 92131

(619) 695-2429

SMITH and POWSTENKO
Broadcasting and Telecommunications
Consultants
2033 M Street N.W., Suite 600
Washington, D. C. 20036
(202) 293-7742

Robert J. Nissen
THE NISSEN GROUP, INC.
Communications Technology Consultants
32 Ridge Drive • Port Washington, New York 11050
(516) 944-5477



- Radio and Television System Design
- Transmitter and Studio Installation
- Microwave and Satellite Engineering and Installation

627 Boulevard
Kenilworth, NJ 07033
201-245-4833



CHUCK JONES
ANTENNA SYSTEMS SPECIALIST
618-564-2481

SOUTHERN ILLINOIS ANTENNAS
ROUTE 3, BOX 114
METROPOLIS, IL 62960

ERIC NEIL ANGEVINE, P.E.
consultant in acoustics
specializing in broadcast studio acoustics

910 Lakeridge Drive Stillwater, OK 74075
405-744-6444 405-372-3949

PROMOTE YOUR SERVICES
and increase business
for as low as \$55 per insertion.
Call 913/888-4664.

UNUSED CALL LETTERS
MAILING LABELS
AM • FM • TV
dataworld
301-652-8822 800-368-5754

PATCHPRINTS VIDEO TIE LINES
In 1 2 3 4 Aux
Custom Patch Bay Labeling
By
PATCH BAY DESIGNATION COMPANY
Div. of Glendale Rubber Stamp & Printing Co., Inc.
P.O. Box 6278, Glendale, CA 91205 Telephone (818) 241-5585
4742 San Fernando Road (818) 241-5585
Glendale, CA 91204 FAX (818) 507-5050

East Coast Video Systems

ON LINE - IN TIME

A full service
company providing...

- Consultation
- Engineering & Design
- Installations
- Training

Serving...

- Cable Systems
- Corporate Facilities
- Broadcast Facilities
- Teleproduction Facilities

178 Casterline Road • Denville, NJ 07834 • (201) 751-5655

Consultation Services

Lightning • Power Conditioning • Grounding
Over 40 years experience, work guaranteed

Roy Carpenter
President

Lightning Eliminators and Consultants
13007 Lakeland Rd., Santa Fe Springs, CA 90670
(213) 946-6886 TWX 910-586-1381

Franklyn R. Beemish & Co.
Engineering for the Video, Motion Picture & Recording Industries

VIDEO POST, BROADCASTING, CONFERENCE CTRS, THEATERS, RECORDING

FACILITIES AND SYSTEMS DESIGN & IMPLEMENTATION
ANALOG & DIGITAL VIDEO, AUDIO, HDTV

ARCHITECTURAL ENGINEERING
ELECTRICAL, HVAC, ACOUSTICAL

574 Sunrise Highway, Baldwin, NY 11510 516/867-8510

JOHN H. BATTISON PE.
CONSULTING BROADCAST ENGINEER,
FCC APPLICATIONS AM, FM, TV, LPTV
Antenna Design, Proofs, Fieldwork
2684 State Route 60 RD#1
Londonville, OH 44842
419-994-3849



Stainless, Inc.
New Towers, Antenna Structures
Engineering Studies, Modifications
Inspections, Erection, Appraisals
North Wales, PA 19454
215-699-4871 FAX 699-9597

BROADCAST DATABASE
dataworld
MAPS

Coverage/Terrain Shadowing
Allocation Studies • Directories
P.O. Box 30730 301-652-8822
Bethesda, MD 20814 800-368-5754

YOUR CARD HERE

reaches 88,528 prospects
for as low as \$55 per insertion.
Call 913/888-4664.

NETCOM (201)837-8424

NETWORK COMMUNICATIONS CONSULTANTS
931 TEANECK RD. TEANECK, N.J. 07666

STATE-OF-THE-ART ENGINEERING FOR AUDIO & VIDEO

- FACILITY PLANNING
- SYSTEM DESIGN
- CAD SERVICES

JAMES TRONOLONE
ENGINEER

CALL US For New and Rebuilt
Radio Broadcast Equipment

HE HALL
Electronics
(804)-977-1100

1712 Allied Street Charlottesville, Va. 22901

Classified

Advertising rates in Classified Section are \$1.50 per word, each insertion, and must be accompanied by payment to insure publication.

Each initial or abbreviation counts a full word. Minimum classified charge, \$35.00.

For ads on which replies are sent to us for forwarding (blind ads), there is an additional charge of \$40.00 per insertion, to cover department number, processing of replies, and mailing costs.

SERVICES

TRANSMITTER TUBE REBUILDING SINCE 1941: 3CX2500, 4CX5000, 4CX15000 and many others. Write for details. FREELAND PRODUCTS INC., Rt. 7, Box 628, Covington, LA 70433. (504) 893-1243 or (800) 624-7626. 6-79-tfn

INNOTECH is your source for FAST SERVICE, SPARE PARTS, TECHNICAL SUPPORT on ALL ADM Products. INNOTECH SYSTEMS, INC. 2328 Livernois, Suite A, Troy, MI 48084. Ph. 313-689-7160 09-89-1t

VINTEN AT YOUR SERVICE

Trust Vinten Dependability for:

- Factory Authorized Parts and Repairs
- Preventive Maintenance • Helpful Advice
- Loaner Program Available —



Vinten Broadcast Inc.

NEW YORK (516) 273-9750 CALIFORNIA (818) 767-0306

TRAINING

FCC GENERAL RADIOTELEPHONE operators license through cassette recorded lessons at home plus one week seminar in Boston, Washington, Detroit or Philadelphia. Our twentieth year teaching FCC license courses. Bob Johnson Radio License Preparation, 1201 Ninth, Manhattan Beach, Calif. 90266. Telephone (213) 379-4461. 8-81-tfn

FOR SALE

HIGHEST PRICES for 112 Phase Monitors, vacuum capacitors and clean, one kw or greater powered AM and FM Transmitters. All duty and transportation paid. Surplus Equipment Sales, 2 Thorncliffe Park Dr., Unit 28, Toronto, Canada M4H 1H2, 416-421-5631. 6-89-tfn

1200 FEET of 6 1/8 inch, 50 OHM, Coaxial Transmission Line, 20 foot sections. Contact John Gordon, KTBO-TV, 3705 N.W. 63rd St., Oklahoma City, OK 73116. 405/848-1414. 09-89-3t

FOR SALE: Tubes 3CX1500A7, 4CX250B, 4CX5000A, 4CX3000A, and more. We carry lg. inventory, all major brands (EIMAC, AMPEREX, RCA) Call Stew 1-800-842-1489. 09-89-4t

TROMPETER J13-75 GOLD patch jacks. PN-2BE-75 (2M, 1F) paralleling. A few PNS-3/625, PNS-4/625, PL-1, TPC-9-75. Soundesign, Box 921, Beverly Hills, CA 90213 213/276-2726. 09-89-1t

FOR SALE 26' Barth 4 camera remote truck with stereo audio capabilities. Call Jerry Hanna: 312/509-5459, WTTW/Chicago. 09-89-1t

FOR SALE

FACTORY DIRECT

Custom Cases	Acoustic Foam	Custom Stands	Studio Furniture

Request Catalogue 800-343-1433, 516-563-0633
Island Cases, 1121-20 Lincoln Ave., Holbrook NY 11741

HELP WANTED

CHIEF TELEVISION ENGINEER

Responsible for audiovisual and television maintenance, repair and the technical operations of all video and audio systems. Supervises technical support staff in the operation of the campus RF (CCTV) distribution system and TVRO earth stations; also responsible for the overall technical aspects of new construction and operation of a four channel interactive (FM response) ITFS network, external receive sites, towers and associated microwave engineering and installations.

QUALIFICATIONS: An Associates degree in electronics, general FCC license and three to five years' experience in the engineering, installation and implementation of an interactive ITFS operation with CATV/NET interconnections are required, preferably in an educational or Public Broadcasting Services environment. Bachelors degree in engineering or electronics technology is preferred; communication and supervisory skills essential; knowledge and experience of equipment maintenance functions, TV production and editing skills are desirable.

STARTING SALARY RANGE:

\$28,364-\$35,455

Send a letter of interest, a comprehensive resume and the names, addresses and telephone numbers of 3-5 work-related references to:

Gordon L. Fox, Director
Instructional Television and Media Services
LORAIN COUNTY COMMUNITY COLLEGE
1005 N. Abbe Road
Elyria, Ohio 44035

Applications will be accepted until the position is filled. Women and minorities are encouraged to apply.

AN AFFIRMATIVE ACTION/EQUAL OPPORTUNITY EMPLOYER

ASSISTANT CHIEF ENGINEER—Rural Alaska AM/TV combo is looking for a self motivated person with at least 4 years experience in radio/television maintenance. Applicants should have valid FCC General or SBE Certification. Duties include maintenance on modern transmitters and studio equipment, system design and installation and limited administrative tasks. Salary DOE plus excellent fringe benefits. Send resume to Brad Humersine, C.E., KYUK AM/TV, Pouch 468, Bethel, Alaska 99559. FAX (907) 543-3130. EOE 09-89-2t

HELP WANTED

TV MAINTENANCE ENGINEER. WHNT-TV is looking for a super technician that is experienced in repair of Sony BVH-2000's, BVU850, Chyron 4200 and Scribe, Abekas A53D, Grass Valley Switchers and routers. Great Station. Great Benefits. Send resume to Don Roden, WHNT-TV, P.O. Box 19, Huntsville, AL 35801 09-89-1t

TECHNICIAN Two years' broadcasting experience at a television station required. Must have strong technical background in camera, vtr, switcher and related studio equipment. Please send resume to: CBS, Placement Office, 7800 Beverly Blvd., Los Angeles, CA 90036. EEO 09-89-1t

MAINTENANCE ENGINEERS needed for Christian teleproduction facility. Experience in maintenance and component level repair required. Ampex AVC, ADO, VPR-3, Beta. Scientific Atlanta/MCL satellite. Resume to Chief Engineer, P.O. Box 819099-9099, Dallas, TX 75381. 8-89-6t

SALES MANAGER:

Broadcast Video equipment Manufacturer seeks aggressive SALES MANAGER. Technical knowledge is preferred, will travel nationwide, salary, commission and benefits. Send resume to: P.O. Box 26446, San Jose, CA 95159.

**Use BE
classified ads**

**SAVE
TIME**

*For fast, accurate service,
please remove the peel off label
used to address your magazine,
and attach it to the Reader
Service Card, the Address
Change Card or to any
correspondence you send us
regarding your subscription.*

CHICAGO, ILLINOIS
Vytautas Urbanas
Telephone: 435-2361
Telefax: (312) 922-1408
55 East Jackson
Ste. 1100
Chicago, IL 60604

NEW YORK, NEW YORK
Diane Gottlieb-Klusner
Telephone: (212) 702-3404
Telefax: (212) 702-7802
Mike Trerotoli
Telephone: (212) 702-3405
Telefax: (212) 702-7802
866 Third Ave.
New York, NY 10022

CLASSIFIED ADVERTISING
OVERLAND PARK, KANSAS
Renée Hambleton
P.O. Box 12901
Overland Park, KS 66212
913-888-4664

Advertising sales offices

SANTA MONICA, CALIFORNIA
Herbert A. Schiff
Telephone: (213) 393-9285
Telefax: 213/393-2381
Jason Perlman
Telephone: (213) 458-9987
Telefax: 213/393-2381
Schiff & Associates
501 Santa Monica Blvd., Ste. 504
Santa Monica, CA 90401

TOKYO, JAPAN
Masahiko Yoshikawa
Orient Echo, Inc.
1101 Grand Maison
Shimomiyabi-Cho, 2-18
Shinjuku-ku, Tokyo, 162, Japan
Telephone: (03) 235-5961
Telex: J-33376 MYORIENT

OXFORD, ENGLAND
Nicholas McGeachin
Interlec Publishing Corp.
Roseleigh House
New Street
Deddington
Oxford OX5 4SP
England
Telephone: (0869) 38794
Telefax: (0869) 38040
Telex: 837469 BES G

FREWVILLE, AUSTRALIA
John Williamson
Hastwell, Williamson, Rep. Pty. Ltd.
109 Conyngham Street
Frewville 5063
South Australia
Phone: 799-522
FAX: 08 79 9522
Telex: AA87113 HANDM

INTERTEC
PUBLISHING CORPORATION
©1989. All rights reserved.

**Want more information on advertised products?
Use the Reader Service Card.**

**Looking for a job?
Have something to sell?
Have a professional service to offer?
Put *Broadcast Engineering's*
Classifieds to work for you!**

- BE's total readership of over 74,000 . . .
 - low, low rates of only \$1.50/word . . .
- and**
- magazine retention of over 1 year for longer exposure of your ad message

***—means you get results
for a very small investment!***

**Call Renée Hambleton at
913-888-4664 to place your classified ad in the very next available issue.**

Ad index

	Page Number	Reader Service Number	Advertiser Hotline		Page Number	Reader Service Number	Advertiser Hotline
A.F. Associates Inc.	83	102	201/767-1201	Leitch Video Of America, Inc.	IBC	2	804/424-7290
Abekas Video Systems	33	19	415/369-5111	3M Broadcast & Related Products	29	15	800/328-1684
Ace Communications	126	74	800/445-7717	Magni Systems, Inc.	105	65	503/626-8400
ADC Telecommunications, Inc.	121	101	612/893-3010	Markertek Video Supply	125	86	800/522-5025
ADX Systems USA	134	93	800/444-4239	McCurdy Radio Industries	74	38	416/751-626
AEG Olympia Ag	107	61		MCL, Inc.	120	75	312/759-9500
Alpha Audio	80	42	804/358-3852	Midwest Corp.	1	3	606/331-8990
Alta Group Inc.	78	30	408/297-2582	Mohawk Wire & Cable	122	73	800/422-9961
Ampex Corp (AVSD)	58-59		415/367-2911	Mosely Associates, Inc.	115	67	805/968-9621
Ampex Corp (MTD)	87	46	415/367-2911	Nautel	102	52	902/823-2233
AMS Industries, Inc.	43	24	206/633-1956	NEC America, Inc.	39	23	312/860-7600
Anvil Cases, Inc.	82,134	45,92	818/575-8614	Nikon Corporation	5	5	516/222-0200
Aphex Systems, Ltd.	95	53	818/765-2212	Nikon Corporation	63	31	516/222-0200
Arrakis Systems, Inc.	21	13	303/224-2248	North Hills Electronics, Inc.	68	34	516/222-0200
Asaca/Shibasoku Corp. America	45	26	213/827-7144	Oki Electrica Industry Co. Ltd.	117	68	213/245-7708
Audio Technologies Inc.	100	57	215/443-0330	Opamp Labs, Inc.	130	81	213/934-3566
Audio-Video Engineering Co.	139	98	516/546-4239	Optical Disc Corp.	127	77	714/522-2370
Auditronics, Inc.	103	59	901/362-1350	Orban Associates, Inc.	7,17	6,11	800/227-4498
Avitel Electronics Corp.	80	41	801/977-9553	Otari Corp.	15	10	415/592-8311
Belar Electronics Laboratory Inc.	122	72	215/687-5550	Panasonic Broadcast Systems Co.	67, 76-77	32,33	201/348-7336
Belden Wire and Cable	27	14	800/BEL-DEN4	Panasonic Pro Industrial Video	34-35,37	20,21	800/553-7222
Benchmark Media Systems	118	70	315/452-0400	Penny & Giles, Inc.	138	103	213/393-0014
Broadcast Supply West	133	84	800/426-8434	Polyline Corp.	129	79	312/297-0955
Broadcast Video Systems Ltd.	130	80	416/764-1584	QEI	31	17	800/334-9154
BTS Broadcast Television Systems	69,71	35,36	800/562-1136	Quanta Editing Systems	140	99	408/295-8814
BTS Broadcast Television Systems	73	37	800/562-1136	Ramsa/Panasonic	97	54	714/895-7277
Cablewave Systems	79	40	203/239-3311	Roscor Corp.	111	60	800/323-8148
Canare Cable, Inc.	130	83	818/840-0993	RTS Systems, Inc.	112	66	818/843-7022
Canon USA Inc., Broadcast Lens	93	51	516/488-6700	Sachtler Corp. of America	123	71	516/867-4900
Cine 60	129	78	212/568-8782	Shure Brothers Inc.	IFC	1	312/866-2553
Clear-Com Intercom Systems	135	91	415/527-6666	Sierra Video Systems	44	25	916/273-9331
Concept W System	113	100	316/342-7743	Sony Communications Prod/ Broadcast Div.	24-25,40-41		800/635-SONY
Conex Electro Systems	125	87	206/734-4323	Sony Communications Prod/ Broadcast Div.	49-56		800/635-SONY
Delta Electronics	98	55	703/354-3350	Sony Communications Products/ Pro Video	64-65		800/523-SONY
Di-Tech Inc.	132	96	516/667-6300	Sony Mag. Tape Div.	89		201/930-7669
EEV, Inc.	101	58	914/592-6050	Standard Tape Laboratory, Inc.	130	82	415/786-3546
Electro-Voice, Inc.	85	48	616/695-6831	Stanton Magnetics	86	49	516/349-0235
ESE	125	85	914/592-6050	Stantron/Unit of Zero Corp.	109	62-63	800/821-0019
Fast Forward Video	128	88	714/852-8404	Studer Revox America Inc.	11	8	615/254-5651
Full Compass Systems	139	97	800/356-5844	Tascam Div. TEAC Corp. of America	136,137	104,94	213/726-0303
GE Support Services/ RCA Broadcast	118	76	609/866-3147	Tektronix, Inc.	13	9	800/452-1877
Gentner Electronics Corp.	91	50	801/268-1117	Telemetry, Inc.	38	22	201/427-0347
Grass Valley Group, Inc.	9	7	916/478-3000	Telex Communications, Inc.	60	28	612/887-5550
Harris Corp.	47	27	800/4HA-RRIS	Telex Communications, Inc.	61	29	612/887-5550
Hitachi Denshi America Ltd.	3		800/645-7510	Telmak	99	56	800/637-4540
Intraplex, Inc.	82	44	508/486-3722	Video Display Corp.	119	69	800/241-5005
Jampro Antennas, Inc.	30	16	916/383-1177	Videotek, Inc.	75	39	602/997-7523
Jem-Fab Group	128	89	516/867-8510	Ward-Beck Systems, Ltd.	BC		416/438-6550
Jensen Transformers, Inc.	128	90	213/876-0059	Winsted Corp.	81	43	800/447-2257
JVC Professional Product Co.	19	12	800/582-5825	360 Systems	110	64	818/342-3127
K&H Products Ltd.	132	95	802/442-8171				
LDL Communications	32	18	301/498-2200				
Lectrosonics, Inc.	84	47	800/821-1121				

GET KEYED-UP ABOUT YOUR STILLS



Key in on the STILL FILE by Leitch, and move into a new creative dimension of still presentation. The STILL FILE will update the look of your productions with a comprehensive array of visual effects. Compression and positioning. Bordering. Digital transitions. Internal and external keying. All easily preset into a sequence you can recall with the stroke of a key.

Call 1-800-387-0233 today for a hands-on demonstration of the STILL FILE's creative abilities.

Get keyed-up
and add a new
excitement to
your stills.



Don't just reach for the nearest
brand name ... reach for the best.
STILL FILE by Leitch.




D-2

LEITCH

Leitch Video of America, Inc., 825K Greenbrier Circle, Chesapeake, VA 23320 — Tel: (800) 387-0233 Fax: (804) 424-0639
Leitch Video International Inc., 10 Dyas Rd., Don Mills, Ont., Canada M3B 1V5 — Tel: (800) 387-0233 Fax: (416) 445-0595

Circle (2) on Reply Card

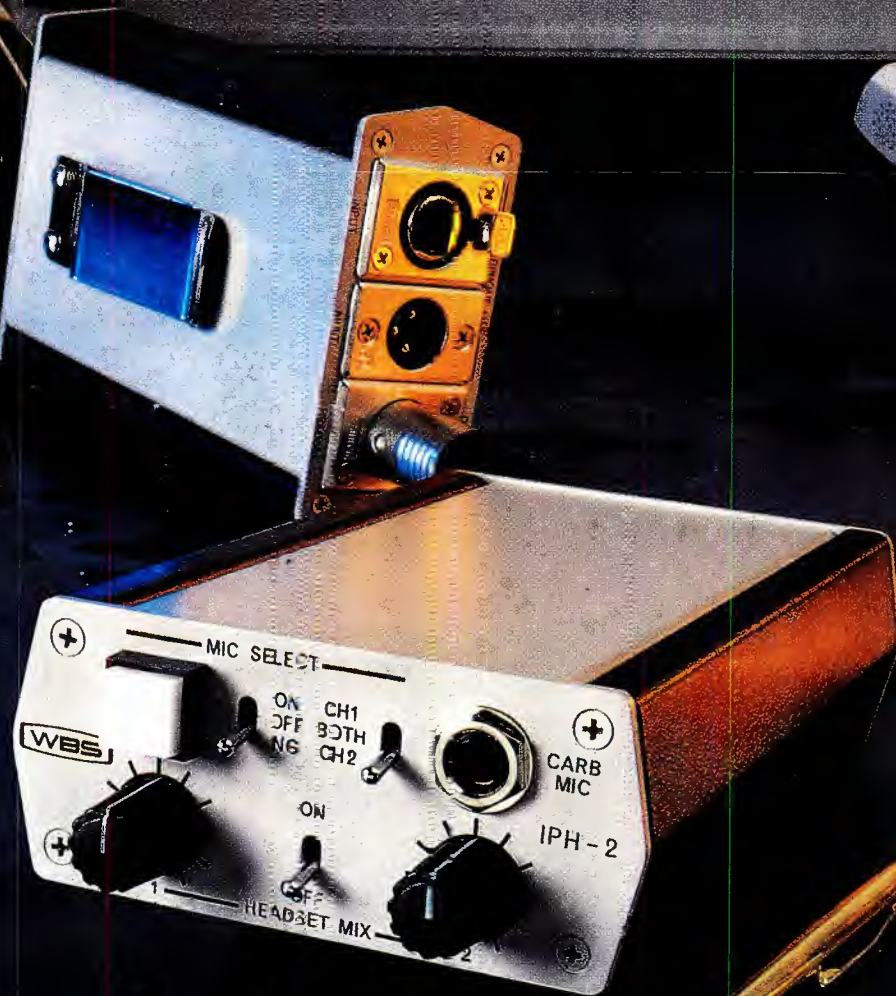

Ward-Beck's Beltpack ... the mobile link for your professional intercom system!

Now total communications has become a reality with the new high-performance WBS Interphone Beltpack.

This superbly designed two-channel, single pair wired, compact unit interfaces with Ward-Beck's advanced four-wire, programmable MicroCOM system. It assures studio quality voice communications to your outermost mobile location.

Beltpack moves quality communications yet another step ahead of the rest of the pack ... and at a very attractive price!



WARD-BECK SYSTEMS

Ward-Beck Systems Ltd., 841 Progress Avenue, Scarborough, Ontario, Canada M1H 2X4.
Tel: (416) 433-6550. Fax: (416) 438-3365.