

250-kW CW Klystron Amplifier for Planetary Radar

Reginald A. Cormier, and Albert Mizuhara, *Member, IEEE*

Abstract—Jet Propulsion Laboratory contracted with Varian Associates to design, build, and deliver replacements for VA-949J klystrons in the X-band planetary radar transmitter on the Goldstone, CA, 70-meter antenna. Output power was to be increased from 200 kW to 250 kW CW per klystron, and full dc beam power was to be dissipated in the collector (it is not possible to operate the VA-9496J without RF drive because of limited collector dissipation capability). Replacements were to be made with a minimum of transmitter modifications. Two model VKX-7864A klystrons were subsequently built and delivered. This report describes the design of these klystrons and the results of their performance testing. The planetary radar transmitter is now operating with these two klystrons.

I. INTRODUCTION

THE X-band planetary radar transmitter at the Deep Space Network tracking facility at Goldstone, CA, has been in operation since 1974. The planetary radar provided the first topographical map of planet Venus. Valuable information has also been gained from radar echoes obtained from the planets Mercury, Mars, Jupiter, and Saturn, and from the moons of Jupiter and Saturn, including the rings of Saturn and possible rings of earth (see this issue), and from nearby asteroids.

The transmitter contains two klystrons operating in parallel to generate the output power. In 1986, a study contract was placed with Varian for a new-design klystron, Varian's model VKX-7864A, to replace the aging, less efficient, low reliability and lower power klystrons, Varian's model VA-949J. April 1991, installation of two new-design klystrons upgraded the transmitter system to an output power of 450 kW and an operating center frequency of 8510 MHz.

The VA-949J has a yoke-type electromagnet. Since the collector coil slips over the collector during mounting, the collector diameter is limited. Dissipation of full dc beam power requires a much larger collector, which requires redesign of the electromagnet to a solenoid. With a solenoid type electromagnet, the klystron is installed gun-first, which allows the collector to be independently sized. The

Manuscript received May 31, 1991; revised July 11, 1991. The work described in this paper was carried out by the Jet Propulsion Laboratory, California Institute of Technology, and Varian Associates, Inc., under a contract with the National Aeronautics and Space Administration.

R. Cormier is with the Jet Propulsion Laboratory, California Institute of Technology, 4800 Oak Grove Drive, Pasadena, CA 91109.

A. Mizuhara is with Microwave Power Tube Products, Varian Associates, Inc.

IEEE Log Number 9107459.

disadvantage is the extreme dimensional accuracy required in construction of the solenoid to realize alignment between magnetic field and electron beam. As a result, the klystron body must be made as short as possible, but not so short that required gain and efficiency cannot be met.

The increased output power to 250 kW places severe demands on cooling of cavities and cavity tuners, especially output and penultimate cavities. The initial paper design had an extended interaction output circuit, but at the end of the design phase, Varian concluded with JPL concurrence that for this application, a single-gap output circuit using an innovative cooling approach was simpler and more cost effective. The addition of a prepenultimate cavity and tuning of cavities for maximum efficiency resulted in a 45% efficiency.

II. DESCRIPTION OF THE VKX-7864A KLYSTRON AMPLIFIER

Design requirements for this klystron amplifier tube are a saturated gain of 50 dB, a bandwidth of 40 MHz (± 1 dB points), and an electronic efficiency of 45%. The tube delivers 250 kW at a frequency of 8510 MHz, which is 15 MHz higher than the previous operating frequency of the planetary radar. Operating frequency band edges are from 8500 to 8520 MHz, with a power variation over the 20 MHz of 0.25 dB. A beam current requirement of 11 A maximum was constrained by existing equipment at the tracking facility. The tube was required to fit into existing socket and cabinet assemblies used for the VA-949J.

Primary emphasis has been on improving reliability of the klystron amplifier. A reduction of maximum electric field gradient in the gun region from 350 kV/inch to 225 kV/inch eliminated arcing problems experienced in the VA-949J. Decrease of cathode loading and coating the cathode with a binary alloy lowers cathode temperature and barium evaporation rate by a factor of four. Tube length was minimized to reduce size and weight, since a longer tube requires a heavier focusing solenoid assembly. The VKX-7864A has a Pierce type electron gun, six cavities, and a collector. Since the available beam supply is current-limited, the klystron gun was designed equal to 1 microperv in order to operate from this supply.

Fig. 1 is a photograph of the klystron mounted in its solenoid and sitting in its stand. The klystron has an appendage vacuum pump for monitoring gas pressure inside the tube.



Fig. 1. Klystron and solenoid assembly, Model VKX-7864A.

A. Electron Gun

Fig. 2 is a computer-simulated model of electrostatic electron trajectories, and shows final cathode-to-beam area convergence with magnetic field of about 37:1. The figure is a sectional view of the axially-symmetric electron gun with only the upper half shown. Electrons emitted from the cathode converge at a place identified on the figure as "Minimum Beam Radius." Equipotential lines are shown transverse to electron paths. Fig. 3 is similar to Fig. 2 except that electric field gradients were taken as shown at points A, B, and C. From electric field distribution around the axially symmetric diode gun, a maximum gradient of 225 kV/inch occurs on the focus electrode at point "A" in the figure. The earlier VA-949J klystron had a maximum gradient of 350 kV/inch and consequently required very long dc aging periods.

Having produced an electrostatic beam of correct perveance and minimum diameter, the next step was designing a magnetic field to maintain the beam with an acceptable degree of scalloping, and verification testing in the beam analyzer. A scaled model of this gun was fabricated for testing in the beam analyzer. The beam analyzer gives a cross-sectional measurement of current density along the axis of the actual electron beam. Minor adjustments of magnetic field reduced scalloping from 12% to 7%. Figs. 4 and 5 show beam analyzer measurements of current density profile at various axial distances from the gun pole piece aperture reference plane.

Fig. 6 shows two views 180° apart of a computer-drawn perspective of the beam's cross-sectional current density based on beam analyzer data. It exhibits normal current density tapering from 4 A/cm^2 at cathode edge to 2 A/cm^2 on axis. Minor perturbations in current density indicate patchy emission quality of the cathode's emitting surface near its axis. These perturbations disappeared with proper aging.

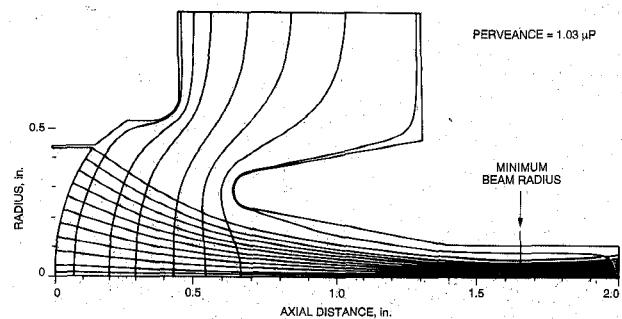


Fig. 2. Typical computer-simulated electrostatic electron trajectories.

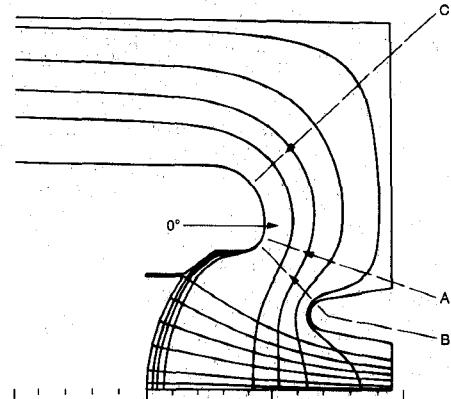


Fig. 3. Equipotential lines between cathode and anode and highest gradient point.

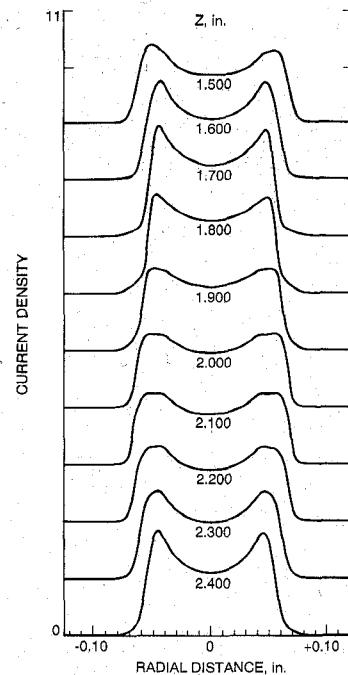


Fig. 4. Beam analyzer measured current density profile at various axial positions (confined-flow magnetic field).

A/cm^2 on axis. Minor perturbations in current density indicate patchy emission quality of the cathode's emitting surface near its axis. These perturbations disappeared with proper aging.

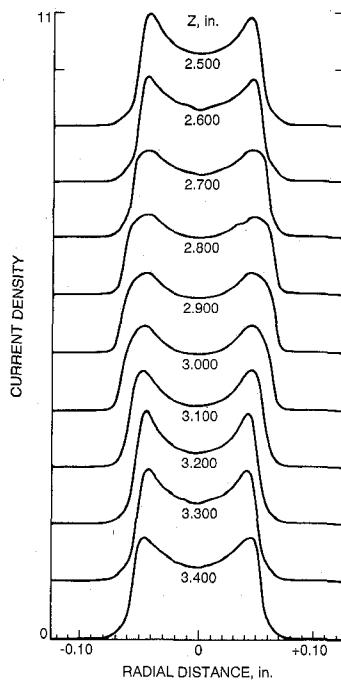


Fig. 5. Beam analyzer measured current density profile at various axial positions (confined-flow magnetic field).

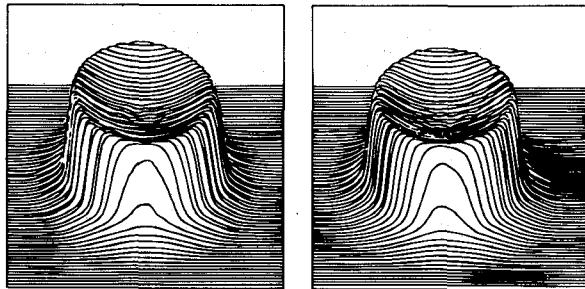


Fig. 6. 3-D beam density profile viewed from two positions 180° apart.

B. Klystron Body

The new klystron consists of an input cavity, four buncher cavities, and an output cavity. The RF signal to be amplified at the input cavity starts the velocity modulation process. The field free space between cavities allows the beam to drift and form bunches. Each subsequent cavity couples to the beam, reinforcing bunching energy. The output cavity couples energy from the beam to the output waveguide. Cavities 1, 2, and 3 are stagger-tuned to achieve required flat bandpass response. Cavities 4 and 5 are tuned for efficiency at a frequency above the high-band edge, enhancing bunching action of the beam. Cavity 6, the output cavity, is always tuned to center frequency. A schematic view of the six cavities is shown in Fig. 7, and typical buncher cavity dimensions are shown in Fig. 8.

A coaxial-to-waveguide transition with a matching coupling iris between waveguide and input cavity provides a low VSWR load to the input signal. A ceramic vacuum window with a coupling probe isolates the vacuum of the

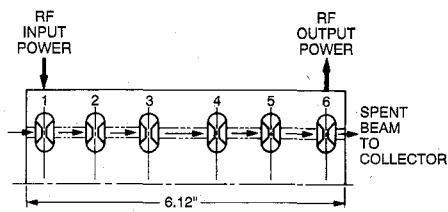


Fig. 7. Schematic view showing cavity location.

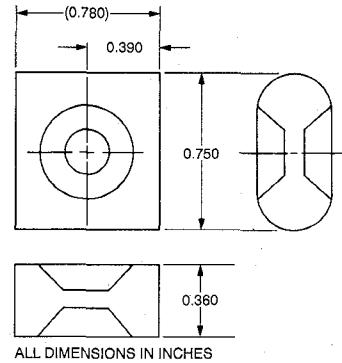


Fig. 8. Typical buncher cavity size.

input cavity from the air side of the coaxial coupler. The probe converts TEM coaxial mode into TE_{10} waveguide mode for coupling to the input cavity. The size of the coupling iris matches the impedance of the cavity to the waveguide. For a cavity gap spacing of 1.0 radian, a beam Q of 321, and a cold unloaded Q of 3500, the external Q equals 294. Use of coaxial input makes it easier for the input line to exit through the solenoid-type electromagnet.

The beam coupling coefficient for a gridded gap $M = \sin(\omega T_o / 2) / \omega T_o / 2$ measures the ratio of ac current induced in the cavities to the ac component of the electron beam. For most klystrons, the gaps are not gridded and the beam coupling coefficient is more complex, involving electric and magnetic field geometry at the cavity gap. Gap spacing and electron velocity, $d/v = T_o$, determine the time electrons remain in transit in the cavity gap. The product of the characteristic impedance of cavities (R_{shunt}/Q), and the beam coupling coefficient squared was maximized to yield the specified saturated gain of 50 dB; both are dependent on cavity gap spacing. Characteristic impedance of a cavity increases as gap spacing increases, while the beam coupling coefficient decreases with increased gap spacing. For this klystron, the value of the coupling coefficient equals about 0.7 and the characteristic cavity impedance equals 108Ω . The optimum product of characteristic impedance and beam coupling coefficient squared gives a gap spacing of 1.2 radian.

The final design is a compromise to meet or exceed all design goals simultaneously: RF power output, gain, bandwidth, and efficiency. From proprietary small-signal and large-signal computer programs, spacing between cavities as well as cavity external Q and frequency were found. Tuning based on calculated small-signal gain response, shown in Fig. 9, was later modified in hot test to optimize output power and efficiency.

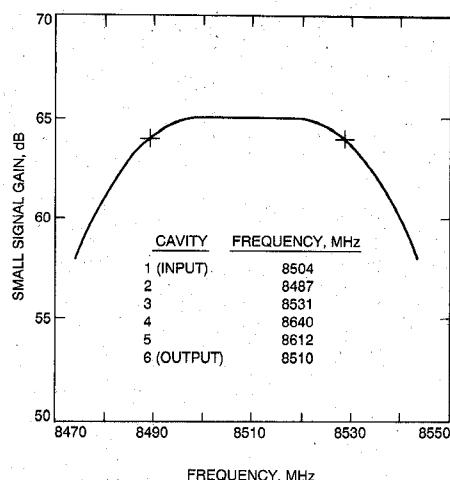


Fig. 9. Small-signal gain response (calculated).

The efficiency depends mostly on the tuned frequency of pre-penultimate and penultimate cavities. A pre-penultimate cavity complicates the problem of finding optimum tuning. The process involved systematic mapping of large signal RF response by holding the frequency of one cavity constant while varying another. This also must be done with cavity 3 as a parameter. The efficiency of the fabricated tube measured 45%, the design value specified.

Temperature variations of the buncher cavities cause the frequency of cavities to change. A cold test of a cavity measured a straight line slope of $-0.158 \text{ MHz}/^{\circ}\text{C}$. Because these tubes at the transmitter site in the Mohave desert experience a normal coolant temperature variation of about 30°C from midmorning to early afternoon, cavity frequency can change at a rate of 0.5 to 1 MHz per hour. Corresponding phase change would be intolerable, especially when the transmit-receive cycle may be several hours. Consequently, it is necessary to have a dedicated, temperature-regulated coolant supply for the klystron RF (cavity) circuit and output waveguide.

Thermal design is a critical part of klystron design. Very tight coupling of cooling water to cavities is necessary to remove heat generated by the RF on the walls of cavities. Although cavities are not tuneable in operation, during initial testing at Varian, the cavities required tuners. Use of a diaphragm tuner on the cavity wall complicates the cooling design. In fact, the initial prototype tube failed because of inadequate cooling of penultimate cavity diaphragm tuner. The solution consisted of an increase in thickness of the diaphragm to provide better heat conductivity, and a modification of the cooling pipe to provide better coupling to the diaphragm.

As a result of bunching, minimum electron velocity is an important parameter in preventing excessive body intercept current. Typically, it is prudent to design for the slowest electron velocity to be no lower than 20% of dc beam velocity. During testing, body current (beam current intercepted by the body circuit, which is primarily at the output cavity) tripled when phase-modulated. Origi-

nally, the body current overload was to be set to 30 mA but, because of the increase in current due to phase-modulation, a new value of 60 mA was selected. However, when measured calorimetrically, both with and without modulation, the body power remained nearly unchanged, which implies that the energy of additional electrons intercepted with modulation is negligible. This increase in body current is believed to result from those sidebands (created by the modulating process), which add in-phase to generate a higher gap voltage. A higher retarding gap voltage would tend to strip off slower electrons in the bunched beam at the output cavity. The drawback of this increased body current is the necessity of setting body current interlock protection to twice the preferred value. This increases the risk of potential damage from overheating due to a fault when the carrier is not modulated.

C. Window

The output window is a thick-block (typically a half wavelength) round window. The material is beryllium oxide ceramic. A cooling jacket surrounds and supports the window. Output VSWR match versus frequency, shown in Fig. 10, is the result of measured data on a window before mounting to the klystron. With 250 kW of output power, window dissipation is 800 W.

D. Collector

The collector is an oxygen-free high-conductivity copper cylinder with a closed top. The inside diameter is 7.6 inches. Liquid coolant passes through holes in the walls to cool the 1-inch-thick sidewalls. The beam spreads in the collector due to the repulsive force of electrons on each other. Lack of a magnetic field allows electrons to spread freely. When there is no RF on the beam, full beam power must be dissipated in the collector. From Fig. 11, the peak power density for the dc beam is 4.3 kW/in^2 . This occurs where the beam first impinges on the collector. The intercepted beam power has a narrow and very sharp peak, which allows the copper to conduct heat to surrounding areas. Nevertheless, wall temperature at the cooling passage could cause coolant boiling if coolant pressure were near atmospheric. To prevent boiling, this area is connected to the inlet or high-pressure side of the heat exchanger (nominally 120 lbs/in^2). When the klystron is producing RF, collector power is reduced by the RF output power and the beam spreads faster compared with that of a dc beam. Although some electrons have greater velocities upon entering the collector, the majority have lower velocities. Slower electrons tend to impinge the collector surface in a zone preceding the point where a dc beam first strikes. With an output power of 270 kW, the maximum peak power density is 750 W/in^2 .

The collector end cooling device contains spiral grooves. Fig. 12 shows a cross-section of the collector assembly. In the final assembly, a thin lead wrap on the collector serves as an X-ray shield.

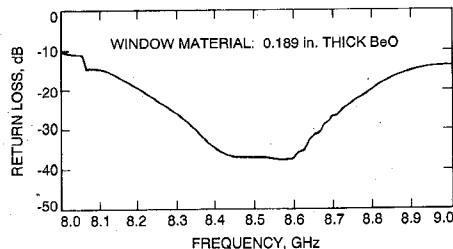


Fig. 10. Output window return loss versus frequency.

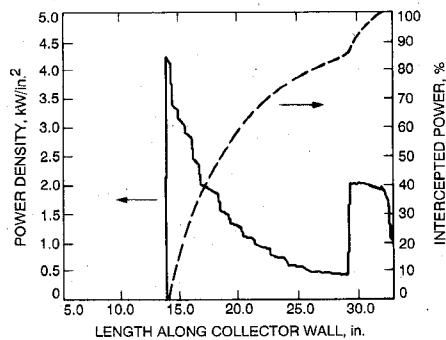


Fig. 11. Collector power density—dc beam.

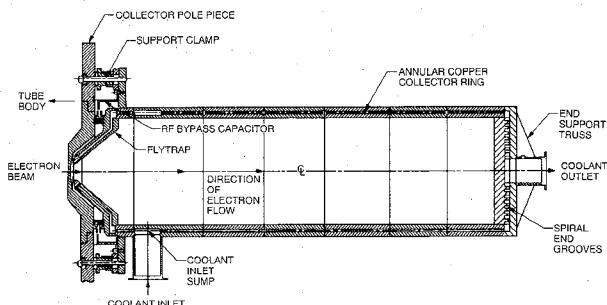


Fig. 12. Collector layout—cross-section.

E. Magnetic Focusing

A re-entrant solenoid focuses the electron beam. This type of solenoid is necessary because of the large size of the collector. During installation, the klystron is lowered into the solenoid gun-first, until the collector pole piece rests on the solenoid outer cylinder. The collector is above the electromagnet, and the collector size is completely independent of the solenoid. The solenoid requires tight dimensional accuracy and serves to shield any x-rays from the klystron body.

The minimum field required to focus a dc beam of constant axial velocity, current density, and radius is called the Brillouin field. Because of the need to keep intercepted body current to an absolute minimum under RF conditions, the magnetic field must be about 2.7 times the Brillouin value. The magnetic field leaks into the cathode region for convergent flow focusing. Except for the small leakage field in the cathode region, construction of the solenoid is such that it is fully magnetically shielded. The solenoid is 18 inches in diameter and 9 inches high and

weighs about 270 lb. The total weight of klystron and magnet is 735 lb.

III. PERFORMANCE MEASUREMENTS

Test data measured on the first two klystron fabricated have characteristics which are so close to each other that with both tubes operating from a common beam power supply, transmission and combining losses are within 0.5 dB. The data presented here are not from one klystron. Some test results are from klystron Serial Number 101, while other results are from Serial Number 102.

A. Bandpass

Klystron operating frequency is from 8500 to 8520 MHz and bandpass data, shown in Fig. 13, is limited to this frequency range. Bandpass curves are for beam voltages of 40 to 51 kV, with the drive adjusted to provide saturated output at each value of beam voltage. At 51 kV the output power at 8510 MHz is 260 kW with a variation of -0.25 dB at band edges. Because the output cavity is for all practical purposes untunable, the resonant frequency of the output cavity turned out to be about 7 MHz lower than the desired center frequency of 8510 MHz. However, required minimum output power of 250 kW at 8510 MHz was still met with a 51-kV beam because of the relatively flat response.

As previously stated, one problem experienced was an increase of body current with phase modulation. With a modulated signal at the input to the klystron (Fig. 14), the switching of modulation from on to off causes an abrupt change of body current, as seen in Fig. 15. With modulation, body current was 42 mA at a carrier frequency of 8500 MHz; at 8510 MHz when modulation was turned off, body current suddenly decreased by 20 mA. Fig. 15 shows that there was no change of output RF power at the time of switching modulation. The switching of modulation and accompanying sudden change in body current was observed while slowly sweeping the frequency from 8500 to 8520 MHz. Subsequently, the klystron body was instrumented for measuring power dissipation and the power does not change with and without modulation. This result confirms that increased body current does not contribute additional power dissipation in the cavities of the klystron.

B. Group Delay and Phase Linearity

Group delay remains practically unchanged with the klystron operating saturated or unsaturated, as shown in Fig. 16. Group delay taken at a beam voltage of 53.5 kV, which is 2.3-kV above normal operating value, is also shown in Fig. 16. This value of voltage was used to examine the sensitivity of group delay to variations of beam voltage. The group delay remains practically unchanged with output power and operating beam voltage. Variations are attributed to instrument noise. The output phase linearity is shown in Fig. 17.

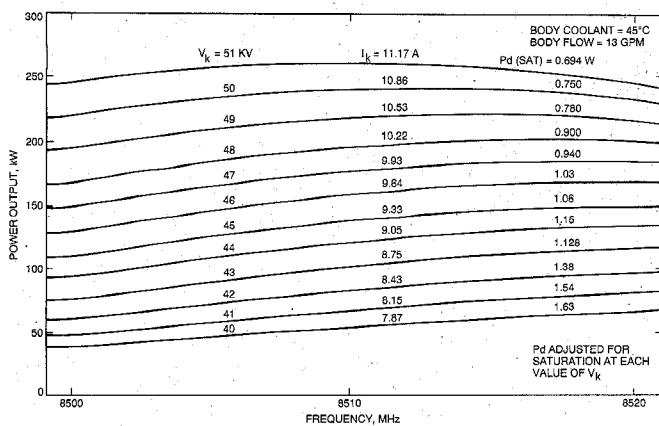


Fig. 13. Power output versus frequency.

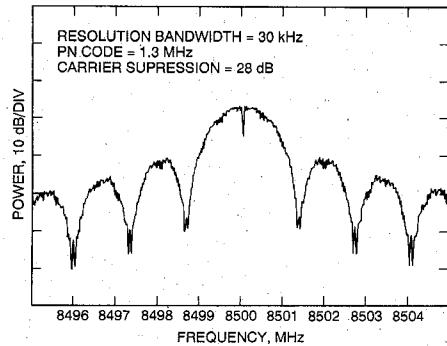


Fig. 14. Phase modulated carrier.

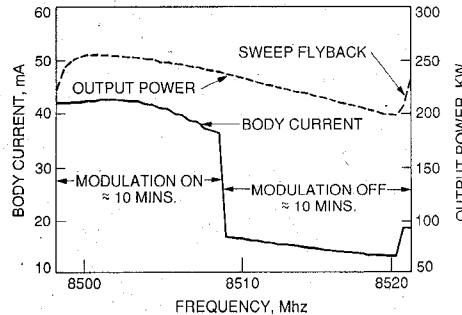


Fig. 15. Body current with and without modulation.

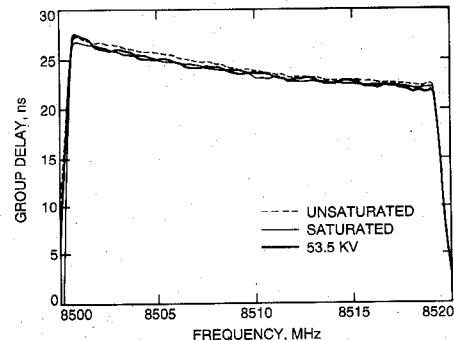


Fig. 16. Group delay.

C. Phase Pushing Factors

Phase pushing factors are listed in Table I. The coolant temperature caused a larger change in phase than what

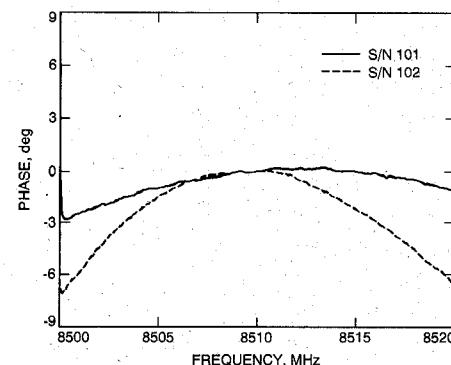


Fig. 17. Phase linearity.

TABLE I
KLYSTRON PHASE PUSHING FACTORS

Parameter	Limits	JPL Measurements	Varian Measurements
Beam voltage	0.04 deg/V	0.023 deg/V	0.022 deg/V
Drive power	5.0 deg/dB	2.67 deg/dB	1.6 deg/dB
Magnet current	2.0 deg/%	^a	0.7 deg/%
Coolant temp ^b	0.10 deg/°C	0.87 deg/°C	1.2 deg/°C
Filament current	0.4 deg/%	^a	^a

Notes:

^aNo measurable relationship.

^bVarian measurement varied body and external waveguide temperature together; JPL measurement varied body and external waveguide temperatures independently (note large deviation from limit).

was specified. During initial testing at Varian, a common coolant line for the klystron body and waveguide was used, and phase changes were associated with temperature changes of klystron body and waveguides. Varying collector coolant temperature had no measurable effects on phase. For WR-125 waveguide operating at 8510 MHz, phase changes with temperature equal 0.21 deg/°C per meter of waveguide length. It is known that the phase pushing factor is negative for the klystron and positive for the waveguide. The coolant is stabilized to better than ± 1 °C; consequently, the phase pushing factor, although much greater than originally specified, is not a problem.


IV. CONCLUSION

The first two VKX-7864A klystrons tested met the requirements as replacements of the VA-949J klystrons in the planetary radar transmitter. These new tubes are now operating in parallel at Deep Space Station 14, Goldstone, CA. Combined output power from the two VKX-7864As is about 500 kW, but because of losses due to combining the waveguide transmission, radiated power at the feed-horn is 450 kW. This value of radiated power is about 100 kW more than that available from the VA-949Js. The collector of each klystron is able to dissipate full dc beam power, which greatly simplifies radar detection and analysis of near-earth asteroids and man-made debris.

These two tubes have very close characteristics, allowing operation from a common beam supply. Both tubes

have nearly identical bandpass and gain responses as well as group delay and phase linearity across the band of interest. The phase pushing factors as a function of various operating parameters met their requirements in all cases except for body coolant temperature. Use of a temperature-regulated coolant source for body and waveguide would have been required even with the lower pushing factor. The higher pushing factor of the body to temperature fluctuations is acceptable.

The only other unexpected phenomenon, increased body current with phase modulation, proved to be insignificant because the intercepted electrons have little kinetic energy and do not add to body thermal dissipation. These klystrons represent state-of-the-art for X-band CW klystron amplifiers.

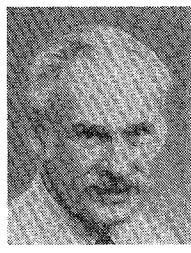

Reginald A. Cormier was born in New York, NY on August 11, 1930. He received the B.E.E. degree in electrical engineering from City College of New York, in 1957.

From 1957 to the present he has worked principally in the design and development of Microwave Transmitters for high-power radar and for satellite communication. He is presently a Member of the Technical Staff at the Jet Propulsion Laboratory and is primarily concerned with the transmitters used to communicate with deep space probes.



Albert Mizuhara (M'56) was born in San Francisco, CA. He received the B.S. degree in electrical engineering in 1956 from the University of California, Berkeley.

Following his graduation, he joined the Traveling-Wave Tube Group in the Research and Development Laboratory of Eitel-McCullough, Inc., San Bruno, California, where he served as Project Engineer on the development of helix CW traveling-wave tubes. In 1960, he joined the Research Department of the Electron Tube Division of Litton Industries, San Carlos, CA, as a Senior Engineer, where he designed and developed linear-beam type devices. His first assignment was to help design a precision resistor network to replace the electrolytic tank. Specifically, he served as Project Engineer on several S-band electrostatically focused klystrons, from lightweight 20-W CW tubes for space application to 1-MW broadband pulse amplifiers. He was also engaged in the design of several electron guns, as well as a 40-micro-perveance, hollow-beam gun using the resistor network coupled to a digital computer. In March 1965, he joined the High-Power Microwave Tube Laboratory of Eitel-McCullough, Inc. (now Varian's Power Grid and X-ray Tube Products) and was engaged in the development of electrostatically focused klystrons for space applications. These klystrons used helical resonators and a radiation-cooled collector. Since the 1965 merger of Eitel-McCullough, Inc. and Varian Associates, he has designed and developed several C-, X- and Ku-band klystrons for radar and satellite communication systems. He has also designed high-power, PPM-focused klystrons at X- and L-band for linear accelerator and radar applications. His most recent project was the development of a 250-kW, CW, X-band klystron for JPL's Deep Space Radar Station of Goldstone, California.

Mr. Mizuhara is presently a Senior Engineer in the Microwave Power Tube Product Operation of Varian Associates and has authored several papers in the field of electron devices. He holds patents on klystrons and traveling-wave tubes.