

There exists a related extension of the Richards transformation [8], leading to the following statement: An impedance $Z(j\omega)$ ($Z(\infty) \neq 0, \infty$), which can be realized as a lumped passive one-port, can also be realized as a distributed transmission line of arbitrary length l terminated in an impedance $Z'(j\omega)$ ($Z'(\infty) \neq 0, \infty$) that is also realizable as a lumped passive one-port. If $Z(0) \neq 0, \infty$, $Z'(j\omega)$ tends to a constant ohmic resistance of value $Z(0)$ as $l \rightarrow \infty$ (otherwise $Z'(j\omega)/l^k \rightarrow \text{const}$ with some integer k). Under certain conditions, the extended Richards transformation can be generalized for lossy lines.

Both of these extended transformations can be used for the synthesis of 1) distributed transmission lines and 2) cascades, in which such lines and lumped lossless two-ports follow one another alternately. In both cases, the synthesis starts from a lumped reference network. Case 1 is based upon the fact that in Fig. 4 of the paper¹ with $\bar{W}_0(x) = R_2 \equiv \text{const}$ the properties of the transformed distributed transmission line with characteristic impedance $W(x)$ tend to those of the lumped lossless two-port N_R (reference network) in some sense as $l \rightarrow \infty$.

For case 2, consider the lumped reference network terminated in the ohmic resistance R_2 . Now insert a cascade of uniform transmission lines all with the same characteristic impedance R_2 between the reference network and its terminating resistance. This does not affect the input impedance and changes the transfer properties (from the input port of the reference network to the terminals of the resistance) only by a constant time delay. Then represent the lumped reference network by a cascade of Darlington sections (and maybe an ideal transformer).

The final cascade can then be constructed by a multiple application of the extended Levy transformation. It can be shown that if the zeros of transmission all occur at real frequencies, and if the lengths of the lines between the lumped lossless two-ports in the final cascade are chosen appropriately, transformers, which in general appear in the lumped reference network, can be avoided.

In both cases, instead of using the extended Levy transformation, we can also apply the extended Richards transformation (in case 2) together with the extraction cycles [9] of lumped network synthesis to the input impedance of the reference network terminated in R_2 .

REFERENCES

- [1] K. Kobayashi, Y. Nemoto, and R. Sato, "Kuroda's identity for mixed lumped and distributed circuits and their application to nonuniform transmission lines," *IEEE Trans. Microwave Theory Tech.*, vol. MTT-29, pp. 81–86, Feb. 1981.
- [2] K. Kobayashi, Y. Nemoto, and R. Sato, "Equivalent representations of nonuniform transmission lines based on the extended Kuroda's identity," *IEEE Trans. Microwave Theory Tech.*, vol. MTT-30, pp. 140–146, Feb. 1982.
- [3] Y. Nemoto, M. Satake, K. Kobayashi, and R. Sato, "Equivalent transformations for the mixed lumped Richards section and distributed transmission line," *IEEE Trans. Microwave Theory Tech.*, vol. MTT-36, pp. 635–641, Apr. 1988.
- [4] R. Sato, Y. Ohba, Y. Nemoto, and K. Kobayashi, "Equivalent transformations for the mixed lumped Brune-type section and uniform transmission line," *IEEE Trans. Microwave Theory Tech.*, vol. MTT-38, pp. 1114–1122, Aug. 1990.
- [5] R. Finkler, "Eine Äquivalenztransformation für Netzwerke aus Leitungen und konzentrierten Elementen mit Anwendungen für die Synthese," Doctoral dissertation, Univ. Erlangen-Nurnberg, 1994 (in German).
- [6] R. Finkler and R. Unbehauen, "A new general equivalence transformation for mixed lumped and nonuniform distributed networks with synthesis applications," *Archiv für Elektrotechnik*, vol. 77, pp. 259–266, May 1994, and vol. 77, p. 382, July 1994.
- [7] R. Levy, "A general equivalent circuit transformation for distributed networks," *IEEE Trans. Circuit Theory*, vol. CT-12, pp. 457–458, Sept. 1965.
- [8] P. I. Richards, "A special class of functions with positive real part in a half-plane," *Duke Math. J.*, vol. 14, pp. 777–786, Sept. 1947.
- [9] D. C. Youla, "A new theory of cascade synthesis," *IRE Trans. Circuit Theory*, vol. CT-8, pp. 244–260, Sept. 1961 and "Correction," *IEEE Trans. Circuit Theory*, vol. CT-13, pp. 90–91, Mar. 1966.

Corrections to "TE and TM Modes in Circularly Shielded Slot Waveguides"

J. L. Tsalamengas, I. O. Vardiambasis, and J. G. Fikioris

In the above paper¹, the following misprints should be corrected:

- 1) Just below (15) and just before (28), $x_2 = -h + wt$ should read: $x_2 = \frac{H_0}{k_c} - h + wt''$.
- 2) In (20), $\frac{H_0}{k_c} |x - x'|$ should read: $H_0^{(2)}(k_c |x - x'|)$.
- 3) In (27), $\frac{B_m}{\alpha}$ should read: $B_m(\alpha)$.
- 4) In (28), $H_0^{(2)}[k_c |2h + w(t - t')|]$ should read: $H_0^{(2)}[k_c |2h + w(t - t'')|]$.

Manuscript received November 14, 1994.

The authors are with the Department of Electrical and Computer Engineering, National Technical University of Athens, GR-157 73, Zografou, Athens, Greece.

IEEE Log Number 9408575.

¹J. L. Tsalamengas, I. O. Vardiambasis, and J. G. Fikioris, *IEEE Trans. Microwave Theory Tech.*, vol. 41, no. 6/7, pp. 966–972, June/July 1993.

Corrections to "Experimental Proof-of-Principle Results on a Mode-Selective Input Coupler"

Jeffrey P. Tate


Upon careful review of the above paper,¹ two errors were found. The cutoff frequency for the TE₀₁ coaxial mode was incorrectly shown as 13.81 GHz in Fig. 4. The results in Fig. 9(a) and 9(b), which compare theory and experiment, are also incorrect. The new figures that should replace them are shown below as Fig. 1(a) and 1(b). The figure captions used for Fig. 9(a) and 9(b) are unchanged. These new graphs correctly illustrate the effect discussed in the text

Manuscript received November 21, 1994.


The author is with the Division of Engineering Technology, Florida A&M University, Tallahassee, FL 32307 USA.

IEEE Log Number 9408576.

¹J. P. Tate et al., *IEEE Trans. Microwave Theory Tech.*, vol. 42, no. 10, pp. 1910–1917, Oct. 1994.

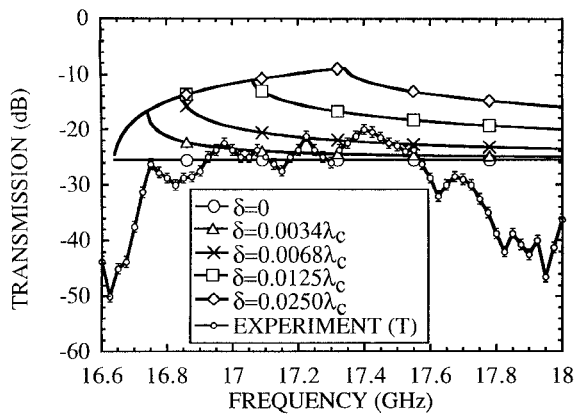

(a)

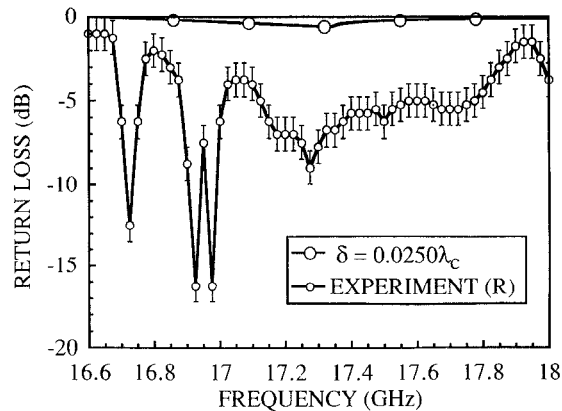

(b)

Fig. 1. (a) A comparison of the theoretical and experimental results for forward transmission versus frequency. The cutoff wavelength λ_c is 18.03 mm for the TE_{02} mode. This figure replaces Fig. 9(a) in the original paper. (b) A comparison of the theoretical and experimental results for return loss during the forward transmission case of Fig. 1(a). This figure replaces Fig. 9(b) in the original paper.

of Section IV regarding the impact of finite helix thickness on the TE_{02} mode frequency response.

Correction to “Theoretical Study of Variation of Propagation Constant in a Cylindrical Waveguide Due to Chirality: Chiro-Phase-Shifting”

M. M. I. Saadoun and Nader Engheta

Owing to the delay in sending the proofread galley of our paper¹ to the IEEE Transactions/Journals Department, several typographical misprints, which were made during the typesetting of our manuscript, appeared in the print. These are corrected below.

- 1) On p. 1691, in the second and third lines from the bottom of the first column, $E^{(1)}$, $E^{(1)}$, $E^{(1)}$, and $E^{(1)}$ should obviously read: $E^{(1)}$, $D^{(1)}$, $H^{(1)}$, $B^{(1)}$.
- 2) On p. 1691, in the denominator of the right hand side of (1), $B^{(0)}$ should be bold faced $B^{(0)}$.
- 3) On p. 1693, on the right hand side of (5), second Bessel function should be primed. Thus (5) should read

$$\frac{\xi_c}{2} \text{Im}(\mathbf{E}^{(0)} \cdot \mathbf{B}^{(0)*})|_{\rho=\text{Rod's Center}} = p\xi_c Z_{TE_{11}} \times \mu |C|^2 \frac{\beta^2}{\left(\frac{x'_{11}}{R}\right)^3 \rho_0} J_1\left(\frac{x'_{11}}{R} \rho_0\right) J_1'\left(\frac{x'_{11}}{R} \rho_0\right). \quad (5)$$

- 4) On p. 1693, in (3b), (3c), (4b), and (4c), one set of parentheses is enough for the variable x'_{11}/R .
- 5) On p. 1693, in fifteenth line after (4c), “the n” should read “then”.
- 6) In the list of references, the name of the author of [10] is misspelled. It should be “Waldron.”

Furthermore, on p. 1693, it would be very helpful to have the following statement after (6) and before the beginning of the next sentence: “. . . where $|_c$ denotes the contribution of chirality to the relative variation of β .”

The rest of the paper is unaffected by the correction of the above typographical misprints.

Manuscript received November 23, 1994.

M. I. Saadoun is with the Information Center, Central Region, Saudi Consolidated Electric Company, Riyadh, 11411, Saudi Arabia. N. Engheta is with the Moore School of Electrical Engineering, University of Pennsylvania, Philadelphia, Pennsylvania 19104, USA.

IEEE Log Number 9408587.

¹M. M. I. Saadoun and N. Engheta, *IEEE Trans. Microwave Theory Tech.*, vol. 42, no. 9, pp. 1690–1694, Sept. 1994.