

Vol. 63 • No. 2

February 2020

Microwave Journal



SOLVING THE 5G mmWAVE PROBLEM



horizon
house®


Founded in 1958

mwjournal.com

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.
For reprints please contact the Publisher.

Advance with Cobham

LeanREL[®]



Introducing LeanREL[®] ICs: Mission-Matched, Affordable Reliability for Satellites and Constellation Space

With the rapidly increasing range of missions, including very large constellations, systems designers need solutions that balance the critical tradeoffs between cost, reliability, and radiation hardness.

Introducing Cobham's new LeanREL[®] electronics, offering an unprecedented combination of user benefits and designed utilizing decades of expertise in developing some of the most complex and challenging space components in existence today. Based on the same QML pedigree and silicon as the Cobham HiRel solutions, the LeanREL[®] product family enables significant cost savings to extend mission durations well beyond that of typical off-the-shelf ICs and greatly speeds up time to market through rapid prototyping. For space-flight, military and aerospace applications that need to operate and survive in harsh environments while remaining cost competitive, rely on Cobham.


COBHAM

www.cobham.com/LeanREL

2121 Crystal Drive, Suite 800, Arlington, Virginia, 22202 USA
T: +1 (703) 414-5300 E: scss-customerservice@cobham.com

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.

For reprints please contact the Publisher.

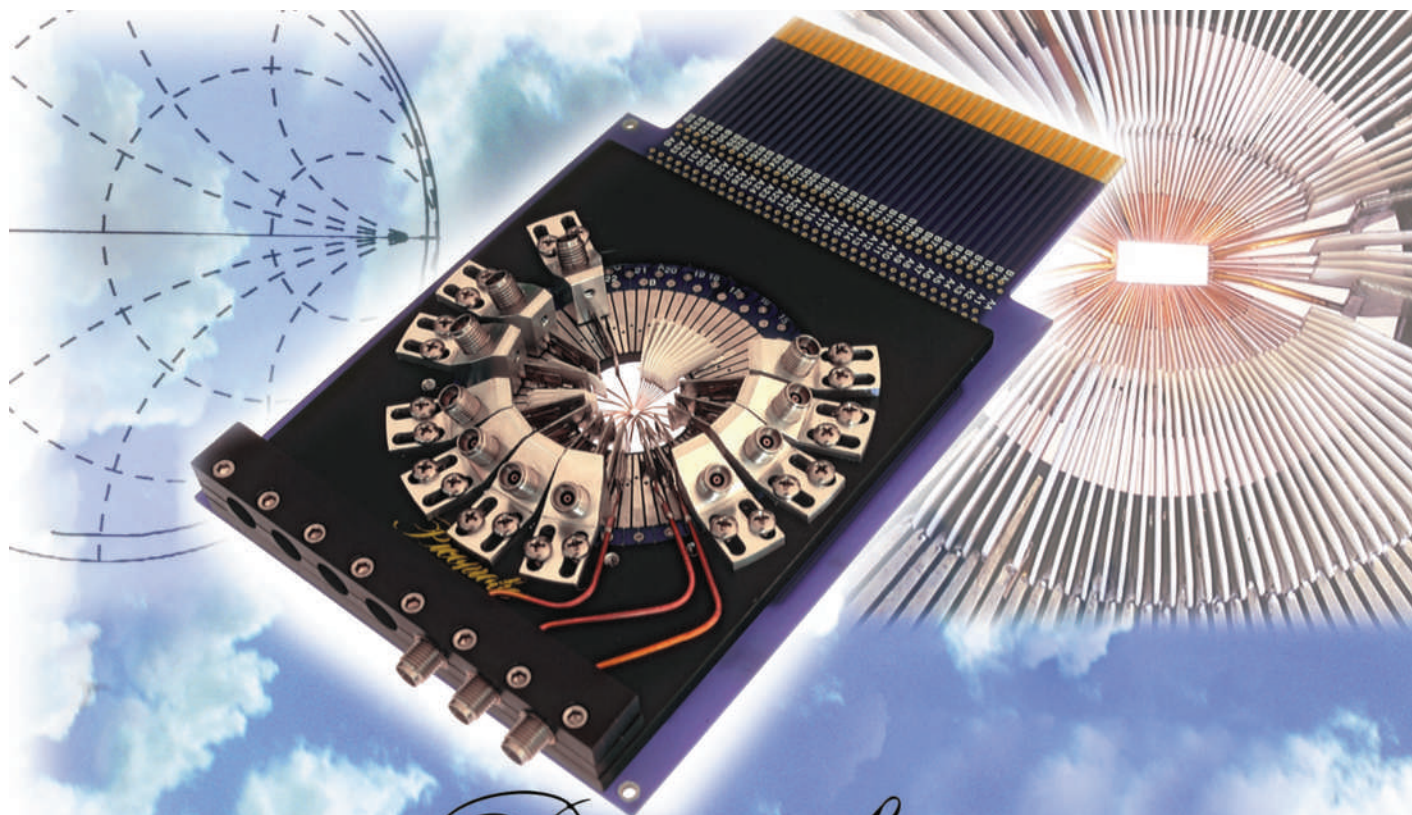

Picoprobe®


Picoprobe elevates probe cards to a higher level...

(...110 GHz to be exact.)

Since 1981, GGB Industries, Inc., has blazed the on-chip measurement trail with innovative designs, quality craftsmanship, and highly reliable products. Our line of custom microwave probe cards continues our tradition of manufacturing exceptional testing instruments.



Through unique modular design techniques, hundreds of low frequency probe needles and a variety of microwave probes with operating frequencies from DC to 40, 67, or even 110 GHz can be custom configured to your layout.

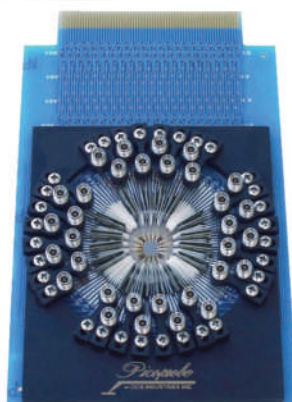

Our patented probe structures provide the precision and ruggedness you require for both production and characterization testing. And only Picoprobe® offers the lowest loss, best match, low inductance power supplies, and current sources on a single probe card.

Our proven probe card design technology allows full visibility with inking capability and ensures reliable contacts, even when probing non-planar structures.

Not only do you get all the attractive features mentioned, but you get personal, professional service, rapid response, and continuous product support--all at an affordable price so your project can be completed on time and within budget.

Typical Specs	10GHz	20GHz	40GHz
Insertion Loss	0.6 dB	0.8 dB	1.3 dB
Return Loss	22 dB	18 dB	15 dB



For technical assistance, custom product designs, or off-the-shelf delivery, call GGB Industries, Inc., at (239) 643-4400.

GGB INDUSTRIES, INC. • P.O. BOX 10958 • NAPLES, FL 34101

Telephone (239) 643-4400 • Fax (239) 643-4403 • E-mail email@ggb.com • www.picoprobe.com


Content is copyright protected and provided for personal use only - not for reproduction or retransmission.

For reprints please contact the Publisher.


MILLIMETER WAVE
MMIC
PRODUCTS

MULTI-OCTAVE BANDWIDTHS
UP TO 43.5 GHz

Amplifiers / Attenuators / Couplers / Equalizers / Mixers
Multipliers / Reflectionless Filters / Splitter/Combiners

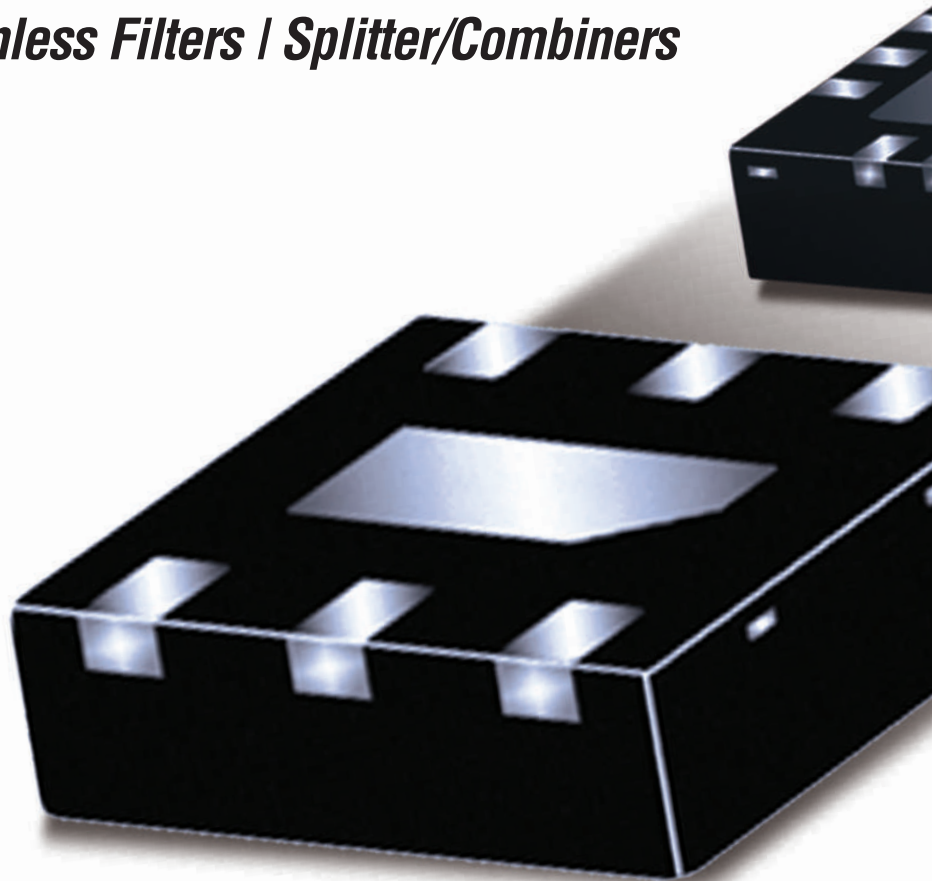

Now over 60 MMIC models **In Stock**
covering applications above 26 GHz


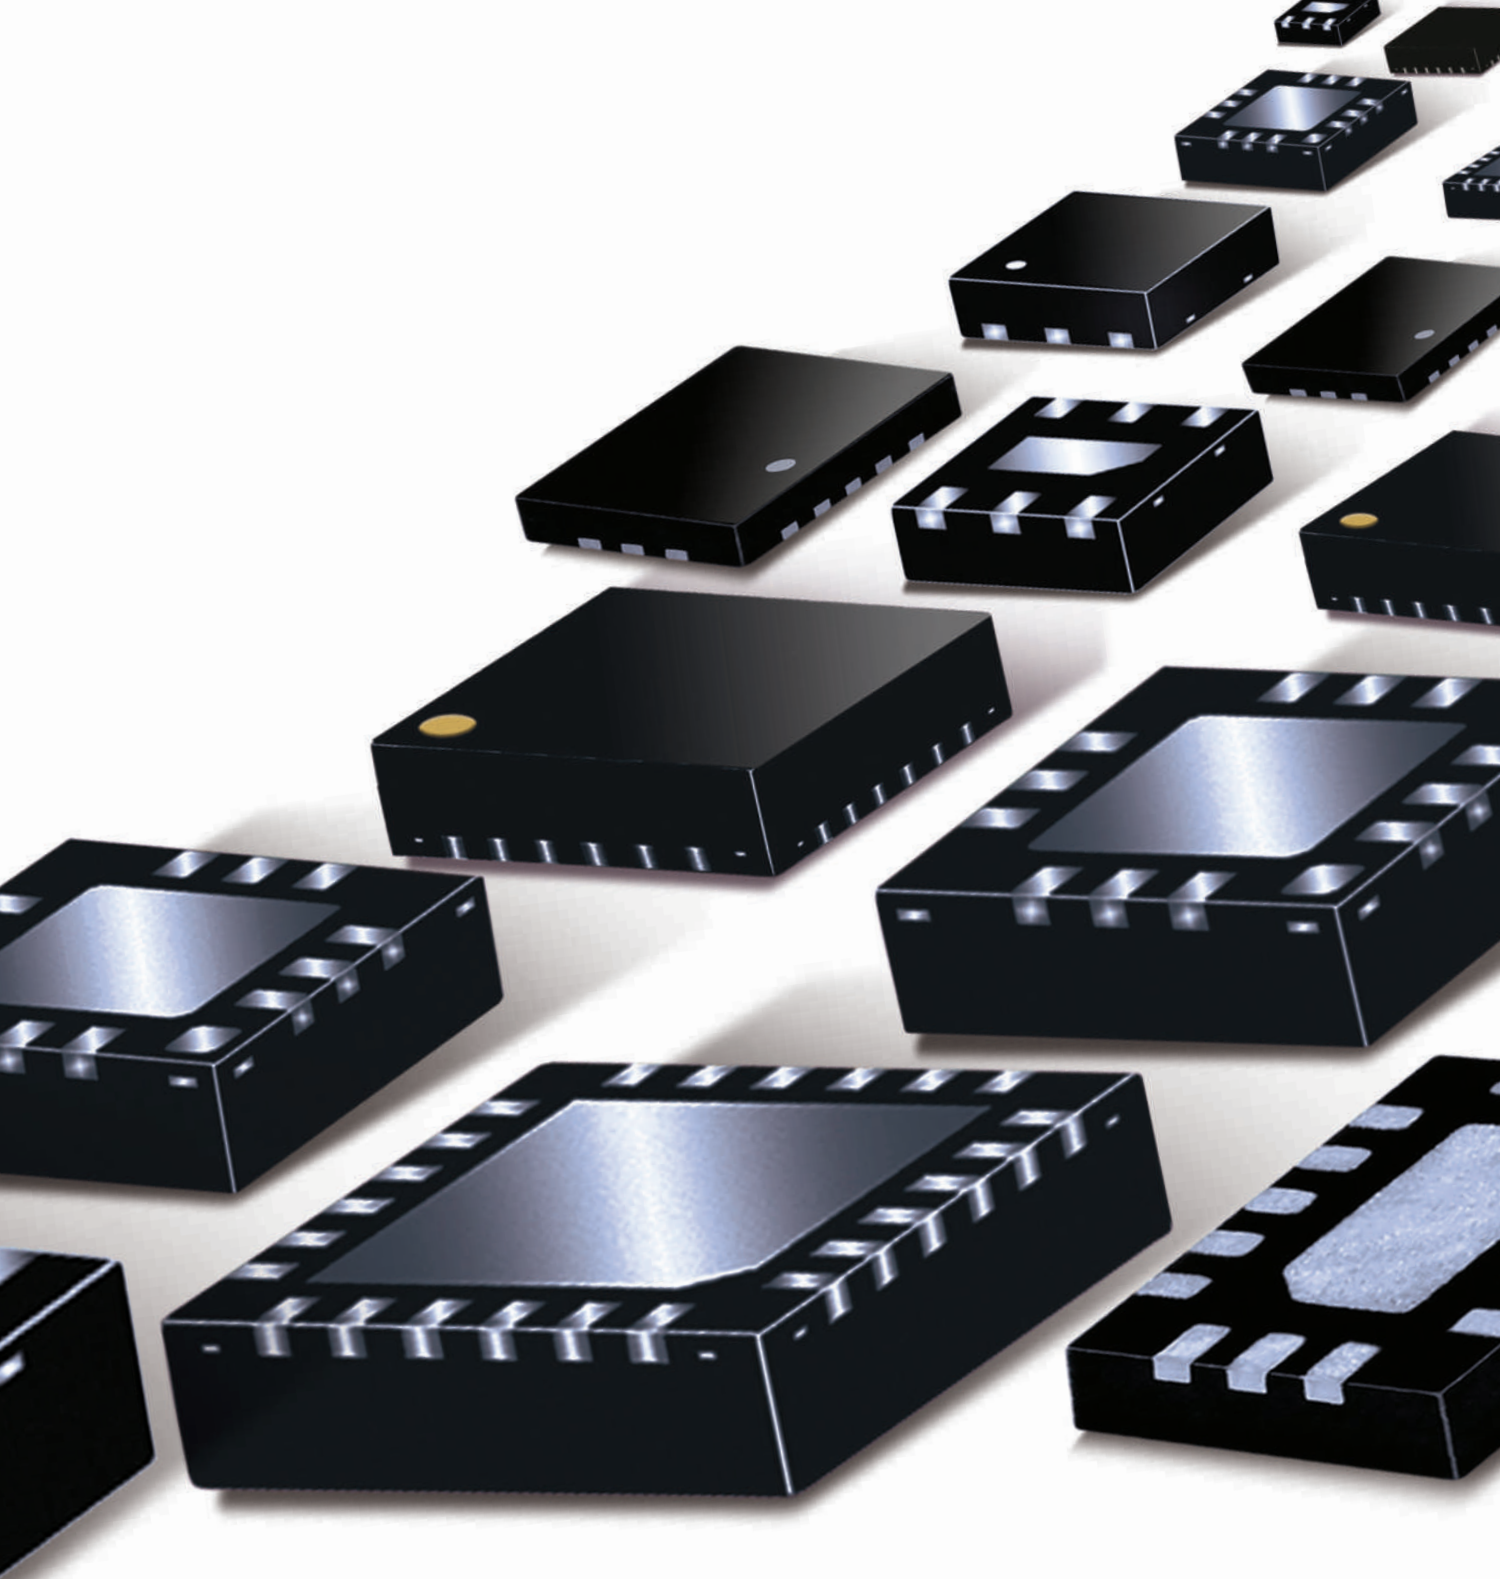


Available in Plastic SMT & Unpackaged Die




Designed For 5G MIMO Active Antenna!!!


The World First SMT Microstrip Patented Isolator/Circulator at 28GHz & 38GHz

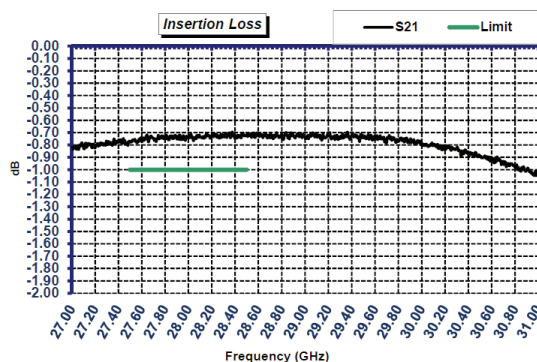

- No Metal Bias Needed
- Easy Reflow Assembly
- No Expensive Wire Bonding



- 200kpcs Sold For Similar Array Application
- Proven Technology

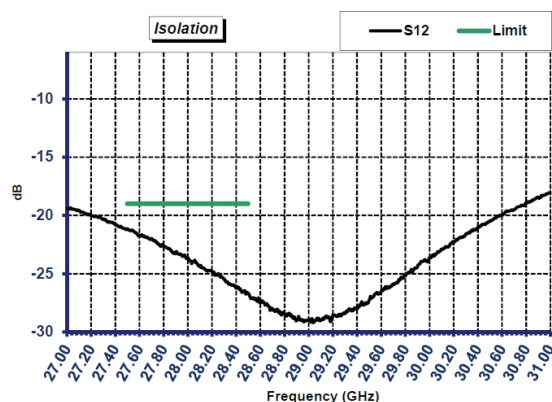

Waveguide Isolators



Surface Mount Circulators



Coaxial Circulators



Cavity Filters



Ceramic Filters




Tel: 1(888)236-9828 (US & Canada)

www.jqlelectronics.com sales@jqlelectronics.com

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.

For reprints please contact the Publisher.

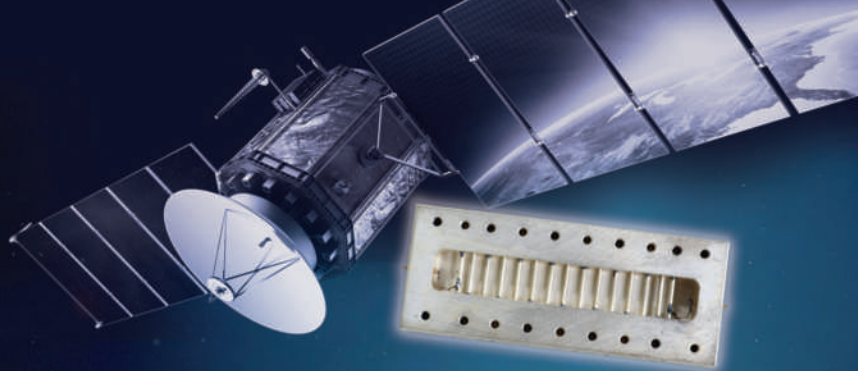

Your Partner in Space

K&L Microwave has proudly contributed to the space industry for over 45 years and has been part of the following revolutionary programs:

Apollo 17

Iridium Next

Iridium Satellite Constellation

GPS-R

GPS-R (V-Sensor Program)

GPS III

Thuraya Satellite Communications

MSV Satellite Telephony

COSMO-Sky Med

OCEANSAT 2

SKYNET 5

Dragon Space Capsule

Crew Dragon

CHIRP

Exomars Rover

"P-Series" of Satellites

Orion Crew Expeditionary Vehicle

Soil Moisture Active Passive Satellite

Mars Curiosity Rover

Mars Spirit Rover

Mars Opportunity Rover

SAOCOM Satellite

SARAL Satellite

SARah

METOP

TurkSat



**TAKING COMMAND THROUGH THE
DEVELOPMENT OF INNOVATIVE SPACE TECHNOLOGIES**



ENABLING COMMUNICATION AND SIGNAL CONTROL

www.klmicrowave.com • www.klfilterwizard.com • 410-749-2424 • sales@klmicrowave.com • [f](#) [in](#) [y](#)

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.
For reprints please contact the Publisher.

CONNECTIVITY SOLUTIONS FOR EVERY NEED, WHEN YOU NEED THEM.




SAME-DAY
SHIPPING



CUSTOM
CAPABILITIES



GLOBAL
CONNECTIVITY

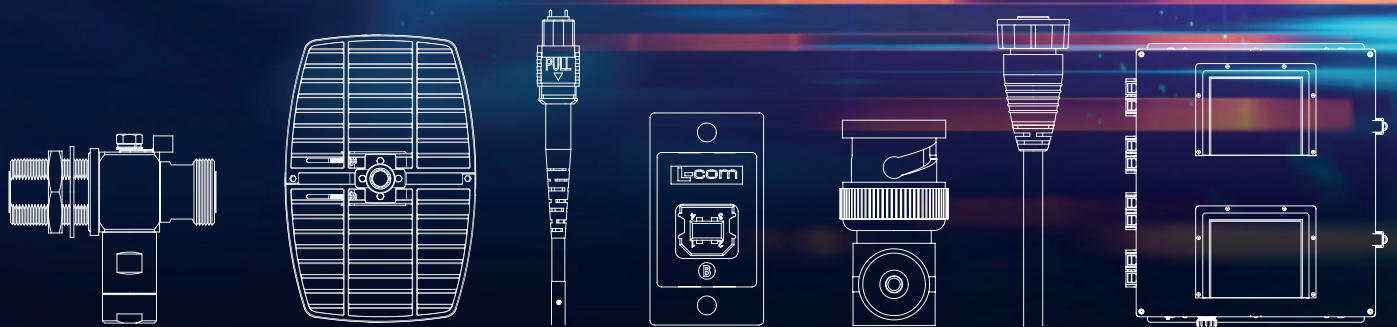

AVAILABLE FOR SAME-DAY SHIPPING!

L-com serves the needs of engineering professionals requiring urgent access to wired and wireless connectivity solutions with a commitment to off-the-shelf availability and same-day shipments.

- Award winning customer service
- Short lead time custom products
- Over 30,000 products in stock
- Expert technical and application support
- Same-day shipping

L-com.com | +1 (800) 341-5266 | +1 (978) 682-6936

L-com™

an INFINITE brand

For personal use only - not for reproduction or distribution
For reprints please contact the Publisher.

RF-LAMBDA

THE LEADER OF RF BROADBAND SOLUTIONS



Made in USA

BROADBAND SSPA SOLID STATE POWER AMPLIFIERS

WWW.RFLAMBDA.COM

0.1-22GHz ULTRA BROADBAND SSPA

RFLUPA01M22GA
4W 0.1-22GHz



RFLUPA0218GA
10W 2-18GHz

EMC BENCHTOP POWER AMPLIFIER



140W 6-18GHz
SOLID STATE BROADBAND

0.01-6GHz VHF, UHF, L, S, C BAND

RFLUPA02G06GC
100W 2-6GHz



RFLUPA0706GD
30W 0.7-6GHz

6-18GHz C, X, KU BAND



RFLUPA08G11GA
50W 8-11GHz

RFLUPA0618GC
25W 6-18GHz

RFLUPA06G12GB
25W 6-12GHz

18-50GHz K, KA, V BAND



RFLUPA18G47GC
2W 18-47GHz

RFLUPA27G34GB
15W 27-34GHz

RFLUPA28G42GA
2W 28-42GHz

RFLUPA32G38GB
8W 32-38GHz

BENCHTOP RF MICROWAVE SYSTEM POWER AMPLIFIER



RAMP00G06GA - 30W 0.01-6GHz



RAMP39G48GA - 4W 39-48GHz



RAMP01G22GA - 8W 1-22GHz



RAMP27G34GA - 8W 27-34GHz

www.rflambda.com



1-888-976-8880

San Diego, CA, US

Ottawa, ONT, Canada

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.

For reprints please contact the Publisher.



online spotlight

Look for this month's exclusive article online at mwjournal.com

Extending Coverage of Mobile Networks Using Satellites

Paul A. Moakes, CommAgility

Cover Features

- 22** **Breaking Down mmWave Barriers with Holographic Beam Forming®**
Eric Black, Alex Katko and Andjela Ilic-Savoia, Pivotal Commware
- 36** **Dielectric Resonator Antenna Arrays for 5G Wireless Communications**
Diego Caratelli, Ali Al-Rawi, James Song and David Favreau, The Antenna Company

Technical Feature

- 66** **Frequency Scalable Power Control and Active Tuning for Sub-THz Large-Signal Measurements**
Luca Galatro and Raffaele Romano, Vertigo Technologies; Carmine De Martino and Marco Spirito, Technische Universiteit Delft


Special Reports

- 82** **Pillars of 5G: Spectral & Energy Efficiency**
Corbett Rowell, Rohde & Schwarz
- 100** **5G: Crossing the Dreaded Trough of Disillusionment to the Plateau of Productivity**
Sarah Yost, National Instruments

Has Amplifier Performance or Delivery Stalled Your Program?




Noise Figure In Select Frequency Bands

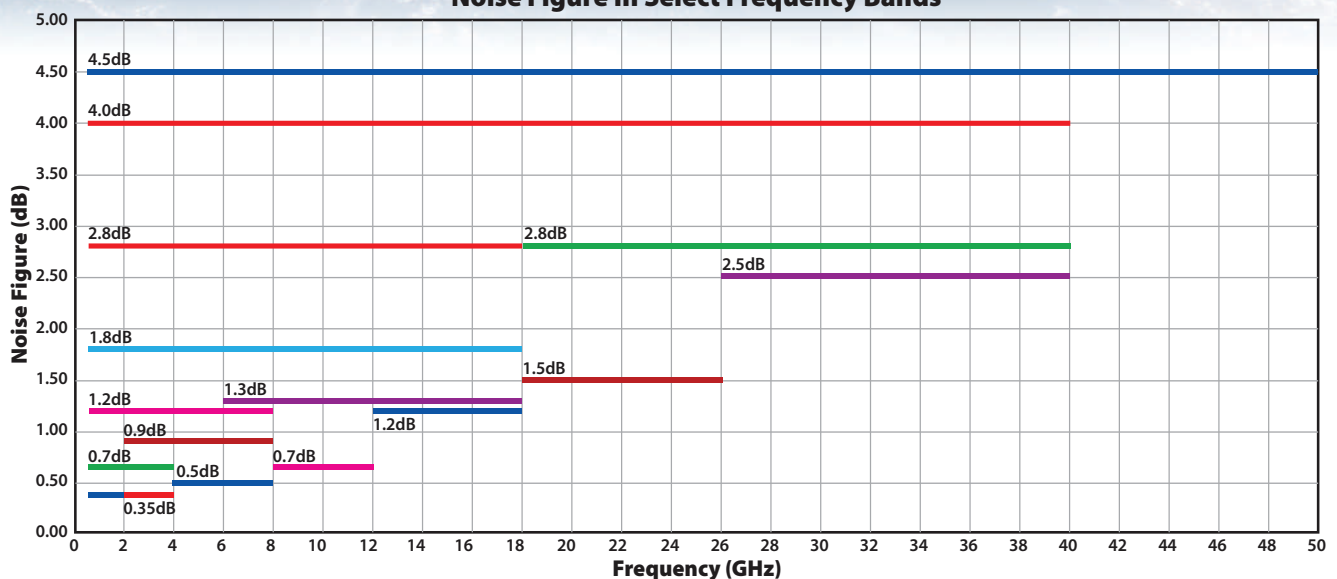

B&Z TECHNOLOGIES
Innovating to Excel

www.bnztech.com

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.
For reprints please contact the Publisher.



Product Feature

106 Ku- and Ka-Band Subharmonic Mixers Improve System Performance

Custom MMIC

Tech Briefs

112 ≥ 300 W Rack-Mount TWTAs Cover 2 to 6 and 6 to 18 GHz

dB Control Corp.

114 Platforms Speed 4G/5G/Network Development

CommAgility

Departments

17	Mark Your Calendar	118	New Products
18	Coming Events	126	Book End
49	Defense News	128	Ad Index
53	Commercial Market	128	Sales Reps
56	Around the Circuit	130	Fabs and Labs
116	Software & Mobile Apps		

Microwave Journal (USPS 396-250) (ISSN 0192-6225) is published monthly by Horizon House Publications Inc., 685 Canton St., Norwood, MA 02062. Periodicals postage paid at Norwood, MA 02062 and additional mailing offices.

Photocopy Rights: Permission to photocopy for internal or personal use, or the internal or personal use of specific clients, is granted by Microwave Journal for users through Copyright Clearance Center provided that the base fee of \$5.00 per copy of the article, plus \$1.00 per page, is paid directly to the Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923 USA (978) 750-8400. For government and/or educational classroom use, the Copyright Clearance Center should be contacted. The rate for this use is 0.03 cents per page. Please specify ISSN 0192-6225 Microwave Journal International. Microwave Journal can also be purchased on 35 mm film from University Microfilms, Periodic Entry Department, 300 N. Zeeb Rd., Ann Arbor, MI 48106 (313) 761-4700. Reprints: For PDF reprints, contact Barbara Walsh at (781) 769-9750.

POSTMASTER: Send address corrections to Microwave Journal, PO Box 1028, Lowell, MA 01853 or e-mail mwj@e-circ.net. com. Subscription information: (978) 671-0446. This journal is issued without charge upon written request to qualified persons working in the RF & microwave industry. Other subscriptions are: domestic, \$120.00 per year, two-year subscriptions, \$185.00; foreign, \$200.00 per year, two-year subscriptions, \$370.00; back issues (if available) and single copies, \$10.00 domestic and \$20.00 foreign. Claims for missing issues must be filed within 90 days of date of issue for complimentary replacement.

©2020 by Horizon House Publications Inc.
Posted under Canadian international publications mail agreement #PM40612608

STAFF

Publisher: Carl Sheffres

Associate Publisher: Michael Hallman

Editor: Patrick Hindle

Technical Editor: Gary Lerude

Managing Editor: Jennifer DiMarco

Associate Technical Editor: Cliff Drubin

Copy Editor: Ashleigh West

Multimedia Staff Editor: Barbara Walsh

Contributing Editor: Janine Love

Electronic Marketing Manager: Chris Stanfa

Digital Content Specialists:

Lauren Tully

Jaclyn Seigal

Audience Development Manager: Carol Spach

Traffic Manager: Edward Kiessling

Director of Production & Distribution:

Robert Bass

Art Director: Janice Levenson

Graphic Designer: Ann Pierce

EUROPE

Office Manager: Nina Plesu

CORPORATE STAFF

CEO: William M. Bazy

President: Ivar Bazy

Vice President: Jared Bazy

EDITORIAL REVIEW BOARD

Dr. I.J. Bahl

F.M. Bashore

A. Chenakin

H. Howe, Jr.

Dr. T. Itoh

Dr. S. Maas

R. Pengelly

Dr. Ajay K. Poddar

Dr. J. Rautio

Dr. U. Rohde

Dr. P. Staecker

D. Swanson

D. Vye

Prof. K. Wu

EXECUTIVE EDITORIAL OFFICE

685 Canton Street, Norwood, MA 02062

Tel: (781) 769-9750

FAX: (781) 769-5037

e-mail: mwj@mwjournal.com

EUROPEAN EDITORIAL OFFICE

16 Sussex Street, London SW1V 4RW, England

Tel: Editorial: +44 207 596 8730 Sales: +44 207 596 8740

FAX: +44 207 596 8749

SUBSCRIPTION SERVICES

Send subscription inquiries and address changes to:

Tel: (978) 671-0446

e-mail: mwj@e-circ.net



www.mwjournal.com


Printed in the USA

THE CENTER FOR ALL YOUR RF DESIGNS

- Custom Product Development
- Electrical Test Capabilities
- Device Tape & Reel
- Hi-Rel Screening
- DIE Services


AMPLIFIERS

- Gain Blocks
- Linear Drivers
- Low-Noise
- Variable Gain
- Coaxial Module



TIMING PRODUCTS

- Clock Oscillators
- MEMS Oscillators
- Crystals
- Buffers
- VCXO
- TCXO
- OCXO



TEST & MEASUREMENT


- Coax Adapters
- Terminations
- Open/Shorts
- Couplers
- Switches
- Phase Shifters
- Attenuators



- Documentation Related Services
 - Obsolete Parts Replacement
 - Solder Tinning
 - Packaging
 - Kitting

DIODES

- PIN
- Schottky
- Varactor
- Limiter
- Gunn




ANTENNAS

- PCB Mount
- Patch
- Coaxial
- Goose Necks
- Body-Worn




TRANSISTORS

- mW to kW
- GaN
- LDMOS
- High Frequency
- Packaged & DIE



SWITCHES

- SMT
- Coaxial
- DIE
- High Power
- High Isolation




CABLE ASSEMBLIES

- High-Performance Test
- In-Box Solutions
- Pigtails
- Conformable
- Flexible
- Semi-Rigid



ATTENUATORS

- Fixed
- Digital
- Coaxial
- Chip
- Voltage Variable
- Temperature Variable



FILTERS

- BAW / SAW
- Ceramic
- LTCC
- Cavity
- Waveguide



RFMW is THE Premier RF & Microwave specialty distributor created to support your component selection, technical design and fulfillment needs. RFMW offers a complete range of services for commercial, military, and space requirements.

We provide many Value-Added Services driven by customer requirements – because we know RF and microwave. **RFMW is the center for all your design solutions.** Visit our website to learn more: www.rfmw.com

RFMW • 188 Martinvale Lane • San Jose, CA 95119 U.S.A.

Toll Free: +1-877-367-7369 • www.RFMW.com • sales@RFMW.com

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.

For reprints please contact the Publisher.

ELEARNING CENTER

Considerations for Satellites and Ramifications for RF Interference

Sponsored by: Rohde & Schwarz and LPKF

2/26



Executive Interviews

Wendy Shu describes her path to CEO of the company formed by her parents, the decision to rename **SAGE Millimeter** as **Eravant** and how this shapes the vision for the company.

Oren Hagai, founder and CEO of **Interlligent RF & Microwave Solutions**, discusses the firm's unique service offering, the success of its U.K. expansion, attractive growth markets and its upcoming design seminar in Tel Aviv.



WHITE PAPERS



New VNA Technologies Enable Millimeter-Wave Broadband Testing to 220 GHz



Design of a Complete RF Downconverter Module for Test Equipment



NewSpace Terminal Testing Challenges and Considerations



Tips and Tricks on How to Verify Control Loop Stability

Demystifying Over-the-Air (OTA) Testing

FEATURED eBooks

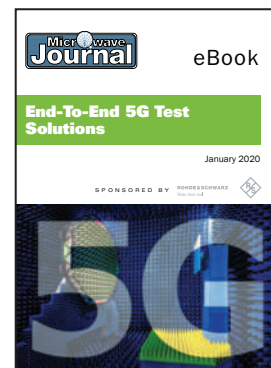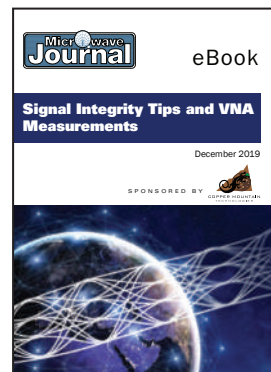

mwjournal.com/ebooks

Join Us Online

Follow us
 @Pathindle
 @MWJGary
 @MWJEditor


Join us at the RF and Microwave Community

Become a fan at
[facebook.com/microwavejournal](https://www.facebook.com/microwavejournal)



Catch *Frequency Matters*, the industry update from *Microwave Journal*,
microwavejournal.com/FrequencyMatters

Antenna design optimization is crucial to launching the Internet of Space.

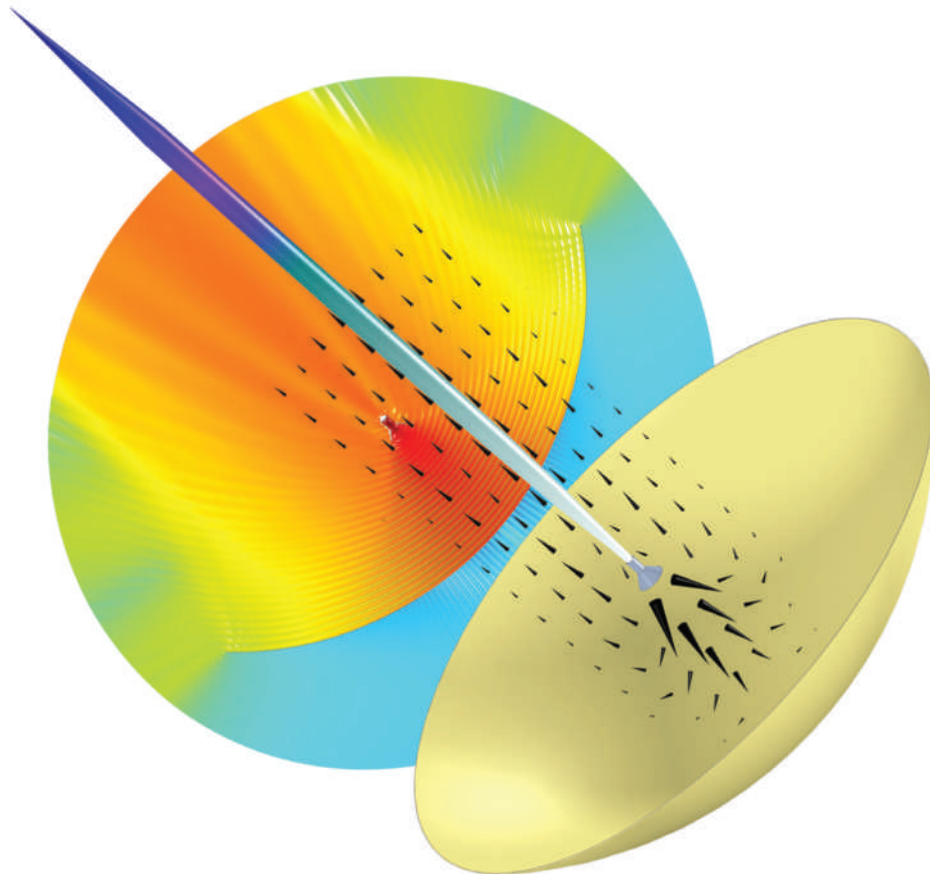

Visualization of the electric field, power flow, and sharp far-field radiation pattern of a parabolic reflector antenna.

The wired and wireless networks that currently connect people around the world cannot reach everywhere on Earth. To solve the problem, engineers are turning their eyes toward space. The goal is to form a suborbital high-data-rate communications network to revolutionize how data is shared and collected. Before this Internet of Space can be built, design engineers need to optimize their antenna designs.

The COMSOL Multiphysics® software is used for simulating designs, devices, and processes in all fields of engineering, manufacturing, and scientific research. See how you can apply it to advanced antenna designs.

comsol.blog/IoS

86 GHz

65 GHz

50 GHz

40 GHz

A New Generation of Products for Next Generation Wireless Applications

- ▶ Coaxial Adapters
- ▶ Amplifiers
- ▶ Attenuators
- ▶ Couplers
- ▶ Filters
- ▶ Splitters
- ▶ Terminations
- ▶ Test Cables



(718) 934-4500 sales@minicircuits.com www.minicircuits.com

566 Rev_G

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.
For reprints please contact the Publisher.

10-12



Washington, DC

At SATELLITE, join 15,000+ at the Walter E. Washington Convention Center from March 9-12, 2020 at the SATELLITE Conference & Exposition to find the latest innovations while expanding your knowledge and network. The SATELLITE Conference consists of the most relevant and important topics facing both satellite industry and end-users, and gathers a diverse group of thought leaders to share their viewpoints.

<https://2020.satshow.com/>

17-19



Cologne, Germany

The EMV 2020 conference will take place in Cologne and provide a comprehensive overview of the latest trends and developments within electromagnetic compatibility. EMV is changing its location for the 2020 event: the exhibition and conference will stay in North Rhine-Westphalia in the even years and move from Düsseldorf to Cologne.

<https://emv.mesago.com/events/en.html>

16

**Call for Papers
Deadline**



The ARMMS RF & Microwave Society invites those wishing to present at the April 2020 meeting to submit papers with an emphasis on RF and microwave design, research, testing and associated subjects.

www.armms.org/conferences/

18-19



Paris, France

The 9th edition of RF & Microwave 2020 conference will cover topics around RF, microwaves, wireless, EMC and fiber optics. It will consist of over 80 exhibitors and partners and is expected to draw over 1,900 visitors. The trade show will majorly focus upon connected wireless objects, the field of EMC, EMC tests, the EMC connectivity, architectures and technologies of microwave functions applied to drones, backhaul to 94 GHz network for 5G and trends on the RAN 5G.

www.microwave-rf.com

17-18



Washington, DC

Established in 1968, GOMACTech has focused on advances in systems being developed by the Department of Defense and other government agencies and has been used to announce major government microelectronics initiatives such as VHSIC and MIMIC, and provides a forum for government reviews. GOMACTech and the Space Environment and Effects Working Group (SEEWG) are pleased to announce that SEEWG technical interests will again be integrated into GOMACTech 2020 conference program.

www.gomactech.net/2020/index.html

27

**Call for Papers
Deadline**



ITC 2020, taking place October 26-29, 2020 in Glendale Ariz., is currently accepting papers on topics such as Telemetry Solutions, Spectrum Efficient Technologies and Applications, Application of Wireless Technologies, Time-Space Position Technologies and more.

www.telemetry.org/

FOR DETAILS, VISIT MWJOURNAL.COM/EVENTS

ONE SOURCE FOR ALL YOUR SPACE EM
WAVEGUIDE & COAXIAL SWITCH NEEDS



SATELLITE 2020

Washington, DC
March 10-12 2020
Come & see us at **Booth #1150**



TAKING SWITCHES TO NEW HEIGHTS

Waveguide & Coaxial Switches

| SPACE QUALIFIED ELECTROMECHANICAL |
| CLASS K - MISSION SPECIFIC COTS |

SWITCHES AVAILABLE IN COTS OR CUSTOMER DESIGN SPECIFICATION

SMA	SPDT/ DPDT
2.92mm	SPDT/ DPDT
TNC	SPDT/ DPDT
HP-TNC	SPDT/ DPDT
WR28	SPDT
WR34	DPDT
WR51	HIGH POWER
WR75	LOW / HIGH P
WR112	LOW / HIGH POWER



* WR28 & WR34 SPDT, DPDT(Xfer)



Ground Switches

WR 75 WR 137 WR 229



Microvacuum Switches DUAL Switch



FEATURING:
LOGUS MANUFACTURING

Family Owned Since...

1961

1711 Longwood Rd
West Palm Beach, FL 33409
Office: (561) 842-3550
Sales@logus.com
www.Logus.com

Coming Events

CALL FOR PAPERS

IEEE AUTOTESTCON 2020
February 15

PCB West 2020
February 24

ARMMS Spring 2020 Conference
March 16

ITC 2020
March 27

AMTA 2020
May 1

2020 IEEE BiCMOS and
Compound Semiconductor
Integrated Circuits and Technology
Symposium (BCICTS)
May 9

APMC 2020
May 15

IEEE IMaRC 2020
July 30

mwjournal.com



FEBRUARY

MWC Barcelona 2020

February 24-27 • Barcelona, Spain
www.mwcbarcelona.com/



MARCH

SATELLITE 2020

March 10-12 • Washington, D.C.
<https://2020.satshow.com/>

GOMACTech 2020

March 17-18 • San Diego, Calif.
www.gomactech.net/2020/index.html

EMV 2020

March 17-19 • Cologne, Germany
<https://emv.mesago.com/events/en.html>

Microwave & RF 2020

March 18-19 • Paris, France
www.microwave-rf.com



APRIL

2020 IEEE Texas Symposium on Wireless and Microwave Circuits and Systems

April 2-3 • Waco, Texas
<https://texassymposium.org/>

Expo Electronica 2020

April 14-16 • Moscow, Russia
www.expoelectronica.ru/en-GB

WAMICON 2020

April 15-17 • Clearwater Beach, Fla.
www.wamicon.org/

ARMMS Spring 2020 Conference

April 27-28 • Thame, U.K.
www.armms.org/conferences/



SPACE TECH EXPO USA

MAY

CS Mantech 2020

May 11-14 • Tucson, Ariz.
<http://csmantech.org/>

EDI CON China 2020

May 13-14 • Beijing, China
www.ediconchina.com

Space Tech Expo USA 2020

May 18-20 • Long Beach, Calif.
www.spacetecheexpo.com/

IEEE IMBioC 2020

May 25-28 • Toulouse, France
<https://imbic-ieee.org/>



JUNE

Military Space USA 2020

June 9-10 • Los Angeles, Calif.
www.smi-online.co.uk/defence/northamerica/milspace-usa

IEEE MTT-S IMS 2020

June 21-26 • Los Angeles, Calif.
<https://ims-ieee.org/>

MilSatCom USA 2020

June 24-25 • Arlington, Va.
www.smi-online.co.uk/defence/northamerica/MilSatCom-USA

95th ARFTG Microwave Measurement Symposium

June 26 • Los Angeles, Calif.
www.arftg.org



JULY

SEMICON WEST 2020

July 21-23 • San Francisco, Calif.
www.semiconwest.org

IEEE EMC+SIPI 2020

July 27-31 • Reno, Nev.
www.emc2020.emcss.org/

RICHARDSON RFPD: DRIVING 5G

5G



ARE YOU READY TO TEST 5G?

Analog Devices has been getting ready for 5G for a long time.

Instrumenting 5G

The transition of test and measurement capabilities from 4G to 5G is not a simple step up. It is an evolutionary leap beyond the performance of current equipment. Wider frequency spectrum and millimeter wave bandwidths are just some of the challenges. And before they can be met, they have to be measured and tested.

With leading-edge products, including DC–13 GHz, high-ESD MEMS switches, and wideband RMS and VSWR detectors, Analog Devices can help you do that with the broadest RF portfolio, the highest-performing converters, and deep expertise all along the signal chain.



ADL5920:
9 kHz to 7 GHz
Bidirectional RMS
and VSWR Detector

The ADL5920 is a 9 kHz to 7 GHz detector that simultaneously measures forward and reverse rms power levels in a signal path, along with the return loss.



**LEARN MORE ABOUT
ANALOG DEVICES FOR
5G INSTRUMENTATION AT
richardsonrfpd.com/ADI-5G-TEST**



Your Global Source for RF, Wireless, IoT & Power Technologies

www.richardsonrfpd.com | 800.737.6937 | 630.262.6800

© 2017 Analog Devices, Inc. All rights reserved. This document is for informational purposes only - not for reproduction or retransmission. For reprints please contact the Publisher.

The Industry's Widest Selection of mmW Silicon ICs for 5G, SATCOM, and RADAR

Market	Band	Product Family	Part Number	Description
5G	24/26 GHz	Silicon Core BFIC	AWMF-0135	Tx/Rx Single Pol Quad BFIC
			AWMF-0164	Tx/Rx Single Pol Quad BFIC
			AWMF-0165	new! Tx/Rx Dual Pol Quad BFIC
		Silicon Converter IFIC	AWMF-0170	new! Tx/Rx Up and Down Converter IFIC
	28 GHz	Silicon Core BFIC	AWMF-0108	Tx/Rx Single Pol Quad BFIC
			AWMF-0158	Tx/Rx Single Pol Quad BFIC
			AWMF-0151	new! Tx/Rx Dual Pol Quad BFIC
		Silicon Converter IFIC	AWMF-0153	new! Tx/Rx Up and Down Converter IFIC
	37/39 GHz	Silicon Core BFIC	AWMF-0144	Tx Single Pol Quad BFIC
			AWMF-0145	Rx Single Pol Quad BFIC
			AWMF-0156	Tx/Rx Single Pol Quad BFIC
			AWMF-0159	new! Tx/Rx Dual Pol Quad BFIC
		Silicon Converter IFIC	AWMF-0161	new! Tx/Rx Up and Down Converter IFIC
SATCOM	Ku-Band	Silicon Core BFIC	AWMF-0146	new! Rx Dual Pol Quad BFIC
			AWMF-0147	new! Tx Dual Pol Quad BFIC
			AWMF-0141	Intelligent Gain Block IC
	K-Band	Silicon Core BFIC	AWS-0102	Rx Dual Pol Quad BFIC
			AWMF-0132	new! Rx Dual Pol Quad BFIC
	Ka-Band	Silicon Core BFIC	AWMF-0109	Tx Dual Pol Quad BFIC
			AWMF-0133	new! Tx Dual Pol Quad BFIC
AWMF-0143			Intelligent Gain Block IC	
RADAR	X-Band	Silicon Core BFIC	AWS-0101	Tx/Rx Dual Pol Low NF Quad BFIC
			AWS-0103	Tx/Rx Dual Pol High IIP3 Quad BFIC
			AWS-0104	Tx/Rx Single Pol Low NF Quad BFIC
			AWS-0105	Tx/Rx Single Pol High IIP3 Quad BFIC
		RF Front End IC	AWMF-0106	Medium Power Front End MMIC
	Ku-Band	Silicon Core BFIC	AWMF-0117	Intelligent Gain Block IC


Industry's longest commercial
phased array experience

20
YEARS

5G Active Antenna Design Options

Complete Optimized RF Signal Chain for mmW Beamforming Arrays

- ICs in 24/26, 28, and 37/39/40 GHz bands
- System Level Performance Optimized for 5G
- Advanced Digital Features
- CMOS Technology

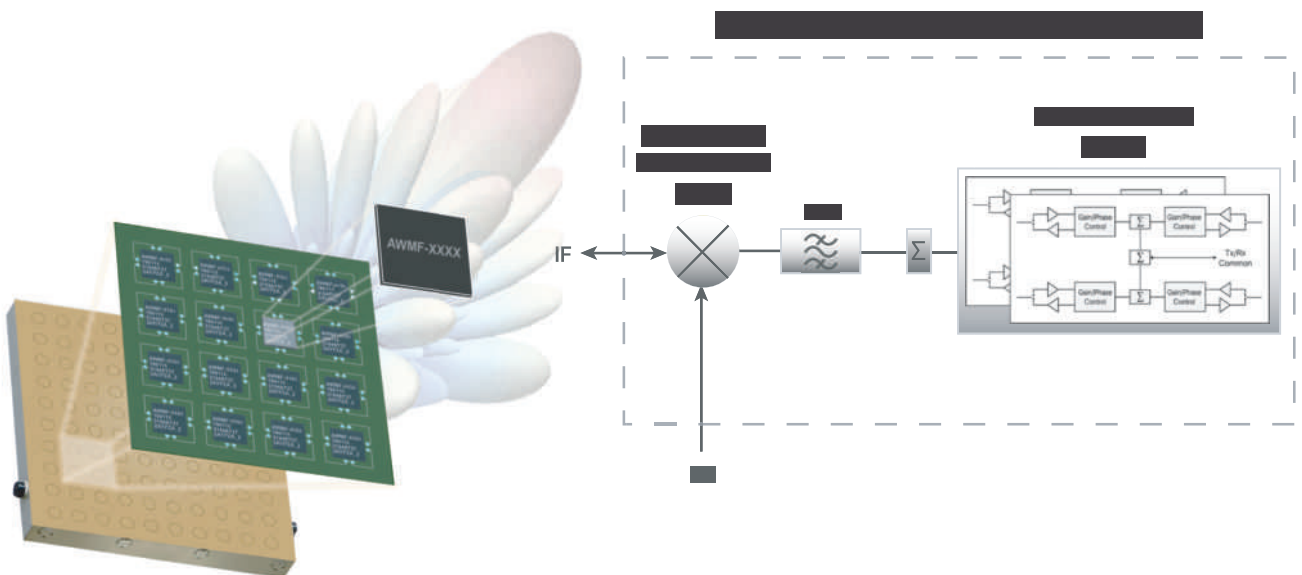

Editor's Note: As 5G mmWave applications are being implemented, the issues of propagation distance and blocking have limited the success of initial deployments. However, new array beam forming technologies have been developed to help overcome these limitations by enabling higher power/gain, higher efficiency and improved scanning angles. Our cover feature introduces two array beam forming technologies that promise to improve mmWave systems: the first is Holographic Beam Forming from Pivotal Commware, and the other is dielectric resonator antenna technology from Antenna Company. So stay tuned as we address semiconductor technology improvements for 5G mmWave applications in our April issue.

Breaking Down mmWave Barriers with Holographic Beam Forming®

Eric Black, Alex Katko and Andjela Ilic-Savoia
Pivotal Commware, Kirkland, Wash.

mmmWave wireless services have been traditionally used in short range wireless transport applications such as fronthaul/backhaul, point-to-point links and SATCOM. 5G in the U.S. will push the role of mmWave beyond simple transport to become a capacity layer for fixed wireless access (FWA) and enhanced mobile broadband (eMBB). Taking mmWave from its fixed beam roots to a dynamic, reconfigurable access layer will depend critically on beam forming techniques to assure link margins without requiring massive capital outlays.

5G mmWAVE BEAM FORMING TECHNOLOGIES

Beam forming uses planar antenna arrays with typical antenna gain ranging from 17 dB (4 square wavelength arrays) to 29 dB (64 square wavelengths). Phased arrays

are a classic architecture used for beam forming. A canonical 4-element time division duplexed (TDD) phased array is shown schematically in **Figure 1**. In such an array, the antenna elements are spaced roughly one-half wavelength apart and every element is backed by a module consisting of a transmit power amplifier (PA), receive low noise amplifier (LNA), phase shifter and switches to swap between the transmit and receive modes. These elements are typically packaged as 4-element modules on a single chip. This distributed architecture is notoriously expensive and power hungry but is well understood by antenna engineers and industry and has been the standard for analog beam forming for decades. At mmWave, phased arrays have seen heavy usage in defense and satellite applications but have not seen widespread use in commercial terrestrial applications.

Phased array beam forming is

both named for and enabled by a phase shifter behind every element. In transmission mode, the radio signal is distributed through a corporate feed network, providing the same phase shift to every element in the array. Phase shifters at each element then impart the appropriate delay in carrier phase to cause constructive interference of the radiated fields in desired direction while also causing destructive interference in others. The finite nature of

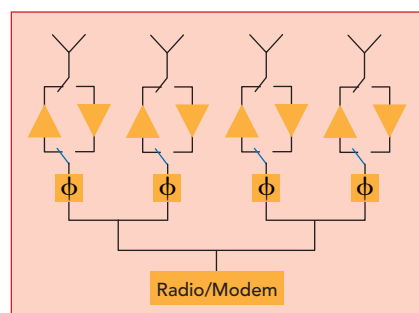


Fig. 1 A canonical TDD phased array architecture.

COAXIAL AND WAVEGUIDE SWITCHES

RLC has the exact solution you're looking for.

RLC Electronics manufactures a complete range of RF switches including coaxial in the frequency range from DC to 65 GHz and rectangular or double ridge waveguide. The operating modes on all designs are failsafe, latching and manual.

Control options are DC voltages as low as 5V, TTL, BCD, RS232, and RS422. All switches have excellent repeatability and lifetimes in excess of one million operations. Many types are QPL listed per MIL-DTL-3928.

- SPDT to SP12T

- Transfer

- Low VSWR

- High Isolation


- Low Insertion Loss

- High Power

- Low Passive Intermodulation

- Surface Mount Options

For more detailed information on coaxial and waveguide switches, visit our web site.

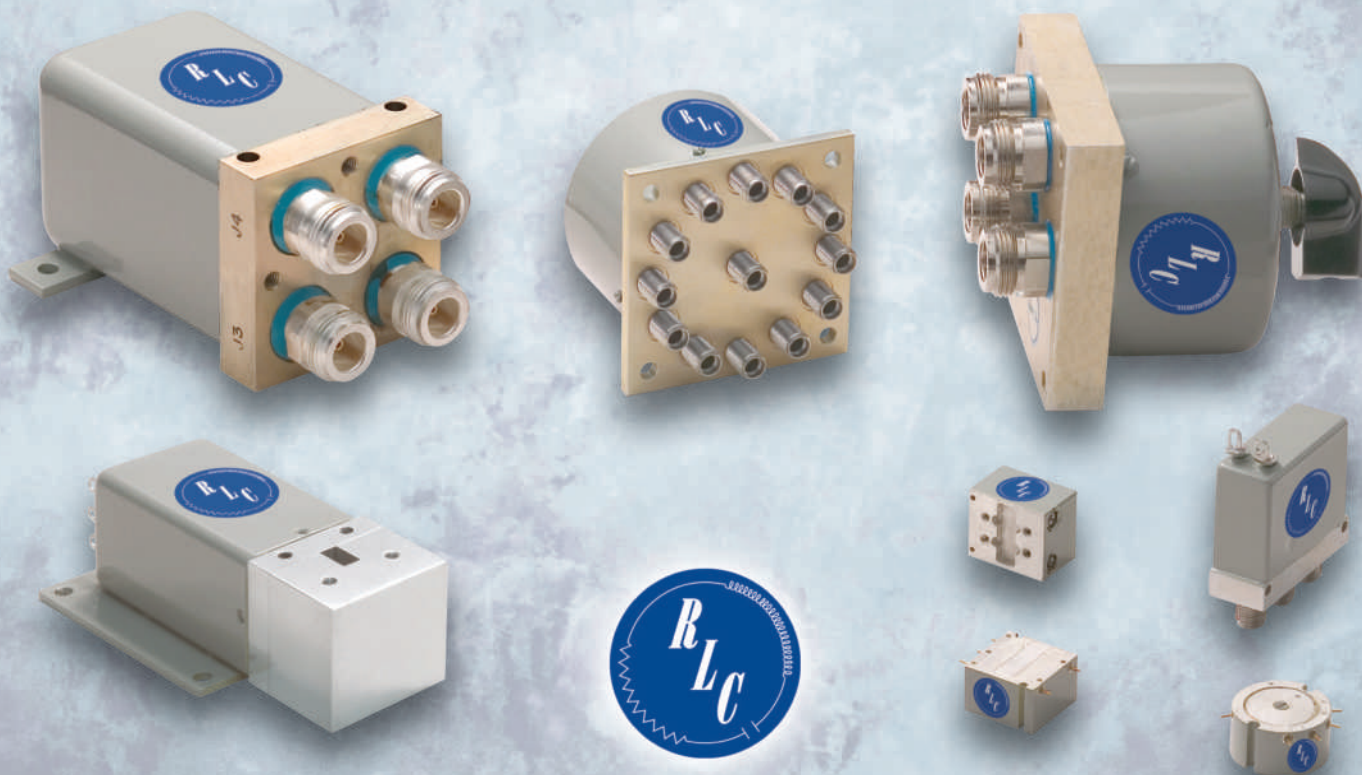

RLC ELECTRONICS, INC.

83 Radio Circle, Mount Kisco, New York 10549 • Tel: 914.241.1334 • Fax: 914.241.1753
E-mail: sales@rlcelectronics.com • www.rlcelectronics.com

ISO 9001:2000 CERTIFIED

RLC is your complete microwave component source...

Switches, Filters, Power Dividers, Terminations, Attenuators, DC Blocks, Bias Tees & Detectors.

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.

For reprints please contact the Publisher.




the antenna aperture (radiating area of the antenna surface) gives rise to sidelobes or unavoidable radiation in undesired directions. Sidelobes are usually 13.4 dB or more below the beam peak. Receiving from the antenna array is the reverse of transmission, with the PA and LNA chains swapping for receive mode while the phase shifters align the received signals from the desired direction to constructively add while destructively combining the other directions. In both transmit and receive, the antenna radiation pattern is well defined and is typically measured in anechoic chambers.

Massive Multiuser MIMO (MU-MIMO) is a newer technique, shown in **Figure 2**, that replaces analog phase shifters with direct digital conversion of the analog waveform. At low frequencies (sub-3 GHz) high resolution digital to analog (DAC) and analog to digital converters (ADC) are used to directly create the radio waveform with the appropriate phase shift. More interestingly, different phase shifts can

be imparted on a per-carrier basis and create beams carrying different information for the same sub-carrier. Receiving is similar with the received waveform being digitized at each antenna element. The digital bus-work connects each element to a coordinated radio/baseband system which post-processes the signals into their respective digital streams.

In practice, direct DAC in MIMO is rarely done at mmWave. RF up/down conversion is used to reduce sampling requirements to those of baseband signals. Even so, the DAC/ADC and RF conversion pairs

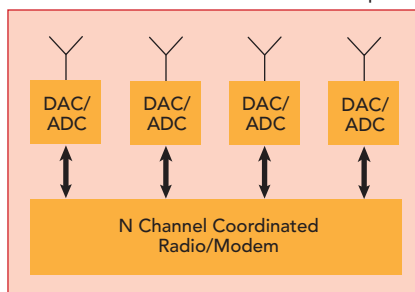


▲ **Fig. 2** A canonical MIMO array architecture.

are even more expensive and power hungry than a phased array. For traditional cellular this may prove acceptable as base station densities are modest. At mmWave, deployed densities are expected to be much higher due to the shorter link distances at mmWave rendering MU-MIMO unsuitable for real deployments.

Holographic Beam Forming (HBF)

HBF is a new technique derived from metamaterial concepts. Functionally, HBF is an analog beam-former with performance equivalent to analog phased arrays. As with other planar arrays, the antenna area dictates the achievable beam-width and maximum realized gain. The HBF technique uses one RF chain that feeds all the elements in the array through a single RF port. Rather than a corporate feed as in phased arrays or digital network in MIMO, HBF uses a series feed that distributes the RF signal along multiple individual antenna elements. Slots, patches, dipoles and other small antenna types have all been shown to work with the HBF technique as radiating elements. A varactor tuned feed coupler transfers energy from the distribution network into the antenna element and this is shown schematically in **Figure 3**. As shown, each element sees a different progressive phase shift from the feed point. Beam forming is accomplished by using the capacitance shift in the varactor to vary the coupling to selected elements with the proper phase alignment needed to point the beam in the desired direction.

HBF is named for its similarity to conventional optical holography. In optical holography, an external source excites the hologram surface which converts the excitation into an output wave our eyes perceive as an image. In HBF, the radio is the source excitation and the beam is the output wave. The pattern of

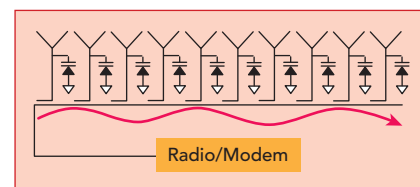

▲ **Fig. 3** A canonical HBF architecture.

IMPROVE YOUR COMMUNICATIONS DYNAMIC RANGE

Upgrade Your UHF SATCOM With MUOS



FMB-232
Dual Diplexer



FMA-123
Antenna Diplexer



FAM-232T
Antenna Diplexer LNA



AM-212D4
Low Noise Amplifier



FAM-232M
Antenna Diplexer LNA



DFP-106AM
Dual Diplexer Preamplifier

MPI METROPOLE PRODUCTS, INC
[THE FREQUENCY OF INNOVATION]

2040 Jefferson Davis Hwy., Stafford, Virginia 22554

540.659.2132 • fax 540.659.2133 • sales@metropoleproducts.com

AS 9100:2016 and ISO 9001:2015 CERTIFIED

MetropoleProducts.com



Testing 5G connectivity in NSA mode

ROHDE & SCHWARZ
Make ideas real




5G NR supports non-standalone (NSA) and standalone (SA) modes. In NSA mode a connection between the user equipment (UE) and base station uses both current LTE (4G) and new 5G technologies. In SA mode the connection is solely 5G based. 5G devices will initially use NSA and, in time, increasingly SA mode as connection technology.

An NSA mode requires LTE as an anchor for exchange of control and signaling information between the LTE network and the UE. A 5G NR capable UE supporting E-UTRA-NR dual connectivity (EN-DC) performs the LTE cell search and selection procedure when switched on, followed by LTE system information acquisition and execution of the LTE initial access procedure. Meanwhile, the UE

provides its radio access capabilities to the network for LTE and for 5G NR. Thus the network can add a 5G NR connection to boost for instance data speeds when necessary.

EN-DC enables the UE to connect simultaneously to two different radio access networks, an LTE base station (eNB) and a 5G base station (gNB). The signals of the two base nodes do not need to be time-synchronized and, therefore, are not required to be physically collocated. Dual connection is depicted in **Fig. 1**.

5G testing requires new test and measurement approaches alongside the familiar LTE ones. Rohde & Schwarz has created the R&S CMX500 radio communication tester that adds 5G NR signaling tests to existing R&S CMW500 LTE solution. As most network operators will implement 5G NR as an extension of an LTE mobile network, the R&S CMX500 can be seamlessly integrated into existing LTE test environment, yet is also ideal for 5G NR testing in standalone (SA) mode. This enables 5G NR RF test, signaling protocol tests as well as data-throughput and application tests (e.g. IMS, VoLTE, VoNR) from R&D to certification tests.

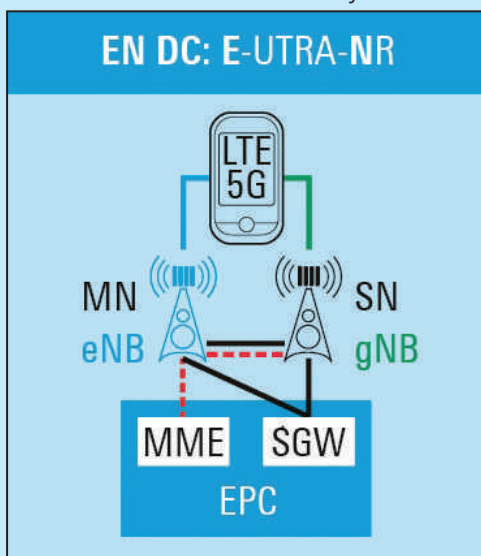

▲ Figure 1. Dual connection in NSA mode

**VISIT ROHDE & SCHWARZ AT
MOBILE WORLD CONGRESS 2020
HALL 6, BOOTH 6B30**



Is 5G simply another generation of mobile communications technologies? Or something revolutionary? Five Rohde & Schwarz experts for wireless communications technologies give a comprehensive answer to this question. Register now to get access to the 5G New Radio online compendium: www.rohde-schwarz.com/5g-ebook

THE PERFORMANCE LEADER IN MICROWAVE CONNECTORS

SSBP Coax Contacts and Connectors Up to 110 GHz



SSBP Coax Contacts

Mix signal and coax contacts in a single, multiport connector

80 dB shielding effectiveness, in sizes 8, 12, 16 and 20

Compact assembly for maximum reliability and reduced space

Connectors

1.0 mm | 1.85 mm
2.40 mm | 2.92 mm | SSMA
TNC | N | Super SMA
0.9 mm SuperMini
End Launch | Vertical Launch
Cable Connectors



southwestmicrowave.com


CoverFeature

element coupling converting the guided excitation into a free space wave is exactly a hologram. As a passive system, the technique is fully reciprocal with reception and transmission using the same hologram. No switching at the antenna level is required. All the amplifiers and baseband components can remain within the radio unit.

Figure 4 shows a typical HBF implemented in a multilayer printed circuit board at 39 GHz. The holographic technique uses a denser lattice than half wavelength along one dimension. As suggested from the schematic view of Figure 3, many of the elements will have the wrong phase for the desired beamshape and are turned off. In order to avoid the efficiency penalty for having significant portions of the array in the "off" state, the elements are packed at more than double the density of a traditional array to allow uniform aperture excitation and efficient beam forming. The element miniaturization along one axis has an additional benefit in that it widens the scanning volume to nearly ± 80 degrees with less than 10 dB loss from antenna broadside.

5G mmWAVE SYSTEM DESIGN

Current 4G networks suffer from limited available spectrum to serve ever-increasing data demands from users. As mmWave spectrum is being used to close this gap, more systems showcase the need for cost-

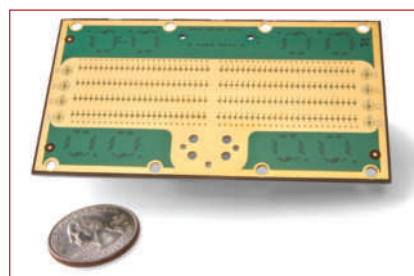

▲ Fig. 4 39 GHz HBF antenna.

effective, low-power beam forming techniques.


A high-level cellular network architecture is shown in **Figure 5**. Perhaps the most challenging link in the above architecture is the radio access network (RAN) link. Front-haul, backhaul and other transport is generally expected to use fiber as the physical medium. RAN, by its nature, requires wireless connectivity. In the context of 5G, the RAN link can be decomposed into the following node types:

- The Base Station (gNB in 5G): The gNB connects the core network to end user equipment.
- User Equipment (UE): The UE connects to the gNB for access and provides the user with service.
- Repeater: Repeaters are optional components that connect the gNB and UE.

These node types all have mmWave capability. The mmWave requirements differ among node types which drives different architecture decisions for practical implementation of 5G equipment.

A mmWave gNB must comply with requirements standardized by 3GPP, the primary cellular RAN standards development organization. In practical terms, mmWave gNBs are driven to meet the following high-level requirements:

- Hybrid beam forming architecture with 2 or 4 subapertures each capable of an independently steered beam
- Moderate-to-high output power, with effective isotropic radiated power (EIRP) from 50 to 70 dBm
- Beamwidths on the order of 5 to 10 degrees
- Fast switching capable of complying with timing requirements at the slot and symbol level, translating to beam-to-beam switching times of ~ 4 μ s

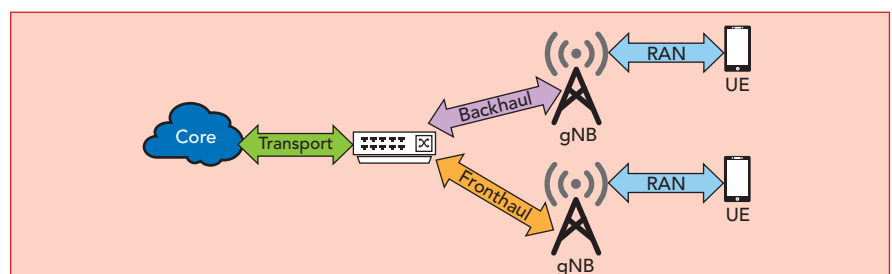

▲ Fig. 5 A high-level 5G cellular network architecture.



A FULL SPECTRUM OF RF EXPERTISE

The future holds unforeseen challenges. Lowest latency communications can help overcome the toughest challenges. Analog Devices' system-level expertise in RF, microwave, and millimeter wave technology helps unlock the entire wireless spectrum and the opportunities that come with it. Learn more at analog.com/ADEF.

[ANALOG.COM/ADEF](https://analog.com/ADEF)



Passive Plus Inc.
RF & Microwave Capacitors

In Stock

Capacitors

Reliable * Fast Turnarounds
* Competitive Pricing

NEW Broadband

Applications: Signal Integrity, Optoelectronics /
high-speed data ROSA/TOSA (Transmit /
Receive optical subassemblies) SONETS
(Synchronous Optical Networks)



01005 0201 0402 0603 0805

- 16kHz – 67 GHz
- Insertion Loss < 1 db
- 10 nF – 100 nF
- Available in both Tin & Gold
- Modeling Data Available



RF/Microwave
Hi-Q/Low ESR/ESL EIA Capacitors



0201 0402 0603 0708 0805

- Case Sizes: EIA
- Low ESR/ESL
- TC = NPO
- Modeling Data Available



Hi-Q Low ESR Capacitors



0505 1111

- Case Sizes: 0505, 1111
- Q > 10,000
- Low ESR/ESL
- TC = NPO / P90
- Modeling Data Available



Available in Non-Magnetic Terminations

**Aerospace * Aviation * Military
Commercial * Medical
Telecommunications**

- Unmatched customer service
- Modeling Available
- Design kits in stock
- Inventory programs

Call us today
631-425-0938
sales@passiveplus.com
www.PassivePlus.com

HBF is well-suited to mmWave gNB designs. Hybrid beam forming with HBF results in low RF and thermal complexity. Phased-array-based hybrid beamformers use monolithic modules to realize the required antenna gain, with each module generating heat due to the phase shifter and amplifier losses. This leads to a thermal design challenge with heat generated throughout the PCB. With HBF beamformers, there is a single RF PA per HBF from which to extract heat. This also allows for digital pre-distortion (DPD), which enhances efficiency and reduces power consumption. HBF also lends itself to rapid beam-switching implementations, without any RF gain or phase adjustment required at fast time scales.

5G UEs pose a major challenge for device designers. The inherently lower power added efficiency at mmWave, compared to traditional cellular bands, leads to devices operating at higher temperatures while simultaneously reducing battery life. The simplified architecture for DPD with HBF is particularly important in handset UEs for this reason, as early 5G handsets have seen thermal issues with multiple mmWave arrays in a confined physical envelope. Mass-market UEs also have even more stringent cost requirements than gNBs, with a constant "race-to-the-bottom" in price pushing designers to embrace novel technologies if they have a corresponding cost decrease.

As a contrast to 5G gNBs and UEs, 5G repeaters are less defined in standards. Generally, repeaters reproduce an incoming signal with minimal processing, typically limited to L1 (physical layer) or L0 (RF layer) only. Regardless of whether a repeater processes a signal at L0 or L1, beam forming is needed to support mobile network operator (MNO) requirements. The cost, complexity and power draw are expected to be less than a full gNB, allowing repeaters to serve as network extension nodes without the effort of deploying a complete gNB. Cost is a major driver for repeater deployment by MNOs: the lower the cost, the more easily repeaters can be deployed to cover gaps in the network. HBF is thus a natural fit for the beam forming subsystem of a 5G mmWave repeater.


When compared to a full gNB solution, repeaters do not need full-stack processing to operate. The lower the layer of processing, the lower the cost of the signal processing chain, as FPGAs and ASICs are not required. A L0 repeater consists primarily of a system controller, power supply and management unit, RF chain(s) and beamformer(s). These modules are required in a L1 repeater with the addition of frequency conversion (to IF or I/Q), ADC/DAC chains and baseband processing. L0 repeaters provide the lowest cost architecture, while L1 repeaters can provide additional signal conditioning in the presence of interference.

Repeaters extend a signal to locations unreachable by the original source. As an example, the free space path loss at 28 GHz is approximately 71 dB 10 ft. from the source. A repeater which extends coverage to an additional 10 ft. (say from a window, inside a home) should have at least 71 dB of gain to compensate. With typical window or wall penetration loss adding at least 5 dB, this example repeater needs 50 dB of electronic gain with an additional 26 dB of gain contributed by the Tx and Rx antennas.

With a restriction to L0-only processing, the repeater must be able to remain unconditionally stable across all deployment environments: this presents the fundamental design issue for repeaters given the large electronic gain required within a single enclosure. Careful RF design is needed to prevent oscillation under any conditions, as stability is affected by temperature, scattering environment and even window material. Pivotal's L0 repeater using HBF has been proven in real-world deployments to effectively extend the coverage of mmWave in both indoor and outdoor settings. The use of low-cost mmWave repeaters is a crucial piece in the 5G deployment puzzle to avoid over-deployment of gNBs, which leads to a node density and cost that is unacceptable for MNOs.

5G mmWAVE HBF REPEATERS IN FIELD TRIALS

Penetration through building material presents a challenge for mmWave deployments. It is not un-

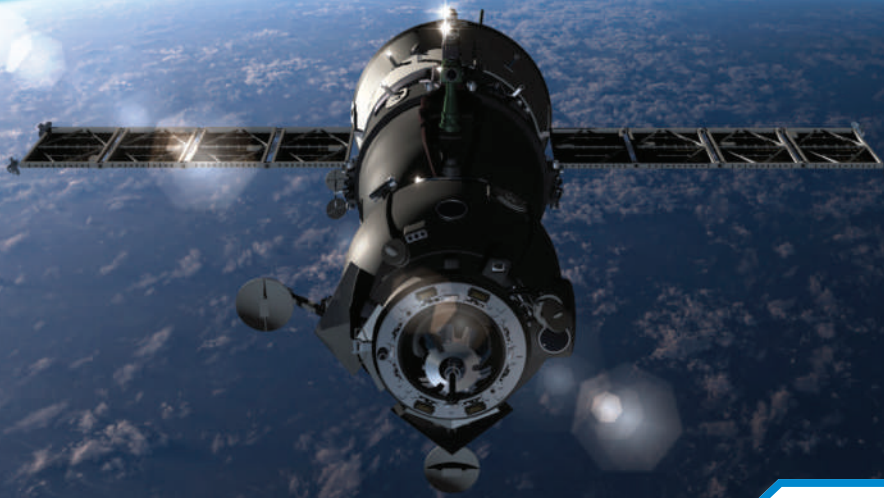

Pushing the limits of standard frequency bands




- High Frequency DC-Q Band Chip Terminations
- Diamond RF Resistives® offering the highest power to size ratio
- K & Ka Band Fixed and Temperature Variable Attenuators
- Outrigger Resistors offering Increased Power Handling over Conventional Solutions

High performance
components supporting
next generation
5G demands

Visit us at  **SATELLITE 2020** Booth 1624

High Performance TCXO for Low Orbit Satellite Applications.

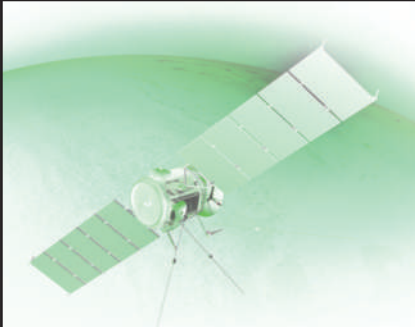

The NEW T1254 TCXO



- ✦ Freq. Range: 10 - 50 MHz
- ✦ Compact 20.3 x 12.7 mm package (Weight: 3 grams)
- ✦ Acceleration Sensitivity down to $<7 \times 10^{-11}/g$
- ✦ +3.3 or +5.0 VDC Supply
- ✦ <35 mA Supply Current
- ✦ CMOS Output
- ✦ Aging: <1 ppM/year
- ✦ Vibration - MIL-STD-883, Meth. 2007, Cond. A
- ✦ Shock - MIL-STD-883, Meth. 2002, Cond. B
- ✦ Radiation Tolerant: 30 krad
- ✦ Operating Temperature -40°C to +105°C



SATELLITE 2020 BOOTH 2136



frequency control solutions

Call 717-766-0223

www.greenrayindustries.com

CoverFeature

common to encounter over 40 dB of loss when transitioning from outdoor to indoors. Since the channel is reciprocal, the same degradation occurs in the uplink direction, from UE to gNB. To overcome mmWave propagation and outdoor to indoor penetration loss, Pivotal Commware created two mmWave beam forming repeater products: the Echo 5G (see **Figure 6**), a self-installable, tablet-sized, on-the-window, beam forming repeater for facilitating

outdoor to indoor propagation, and the Pivot 5G, a professionally installed network element/repeater for supplementing and, in some cases, replacing gNB in commercial network deployments. This setup has been tested in numerous environments with a U.S.-based carrier and commercial gNBs and has completed interoperability testing with network equipment from three gNB vendors.


Apartment Buildings

Pivotal conducted one trial in a suburban apartment building shown in **Figure 7**. The gNB was located 700 ft. away and a commercial UE was inside the home. The Echo 5G was placed on the patio window (in yellow) with line-of-sight (LOS) to the gNB at 45 degrees from window broadside (parallel arrows). The unobstructed gNB-to-UE link supported peak throughput of 1.5 Gbps. The UE was then moved around the interior and tests run in various locations within the apartment.

The two pictures in Figure 7 depict "before and after" the unit was utilized. Figure 7 summarizes



▲ Fig. 6 Pivotal Echo 5G™.

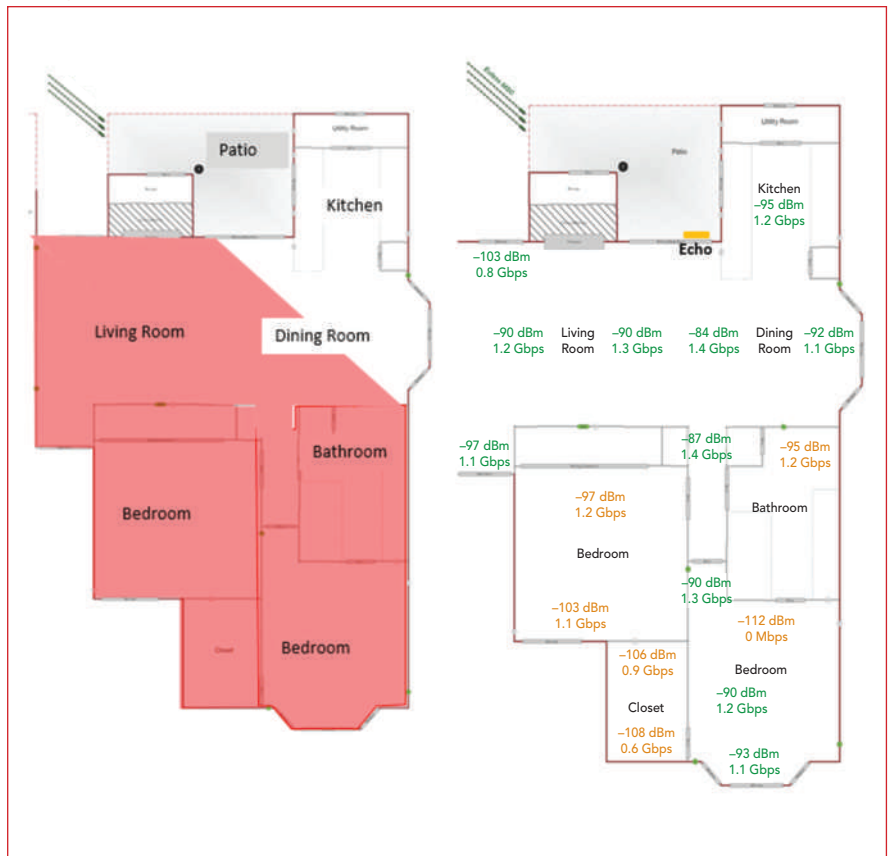

▲ Fig. 7 Suburban apartment trial results, before and after Echo 5G deployment.

AnaPico

of Switzerland



**We make
the difference**

AnaPico Ltd. of Switzerland.

Swiss made RF / Microwave Signal Generators and
Analyzers available in the U.S. from Berkeley Nucleonics!

MULTI-CHANNEL SOURCES



TYPE	MODEL	FREQUENCY RANGE	SWITCHING SPEED	FEATURES
Frequency Synthesizers	865-M-X	0.01 to 20 GHz	20 μ s	• Highly phase synchronous and phase coherent switching option • FM, PM, Pulse • Internal OCXO, external variable reference
	825-M-20-X	9 kHz to 20 GHz	2 μ s	• wideband synthesizer • combines agile frequency switching with low phase noise • fast pulse modulation
Multi-Channel Signal Generators	855B	300 kHz to 6, 12, 20, 33 or 40 GHz	25 μ s	• Ultra-Low phase noise • Phase coherent switching option • 2 to 4 phase coherent outputs with outstanding channel-to-channel phase stability

For US Customers:

Call: 800-234-7858

Email: rfsales@berkeleynucleonics.com

Visit: <https://tinyurl.com/u9wdx2w>

For Non-US Customers:

Email: rfsales@anapico.com

Visit: www.anapico.com

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.

For reprints please contact the Publisher.


ARE YOUR DRIVER AMPS
OUTPERFORMING YOUR
EXPECTATIONS?

4mm² QFN package



EMD1706
GaAs PHEMT
POWER DRIVER
MMIC AMPLIFIER


- *Ideal for 4G/5G driver amplifier designs*
- *DC-24 GHz operation*
- *Typ. +22dBm P1dB*
- *Typ. +23dBm Psat*
- *High power efficiency
+8Vdc @ 130mA*




A plug-and-play evaluation board is available

FROM THE EXPERTS IN
BROADBAND MMICs

ECLIPSE mdi
microdevices, inc.
www.eclipseMDI.com

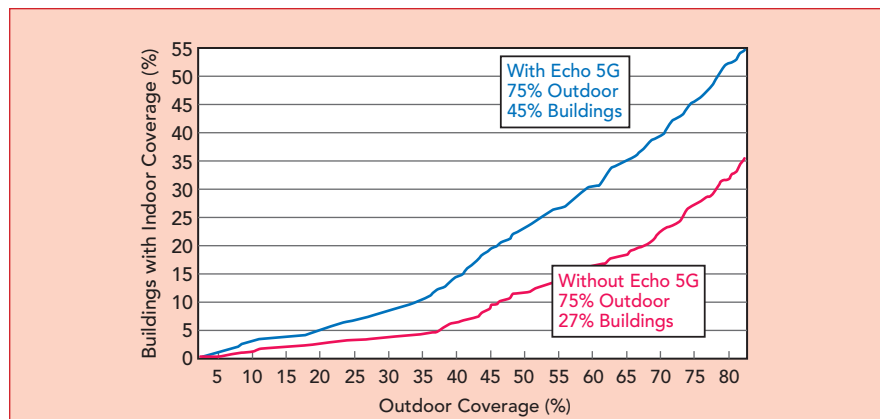

▲ Fig. 8 Outdoor vs. indoor coverage, urban, without Echo (red) and with Echo (blue).

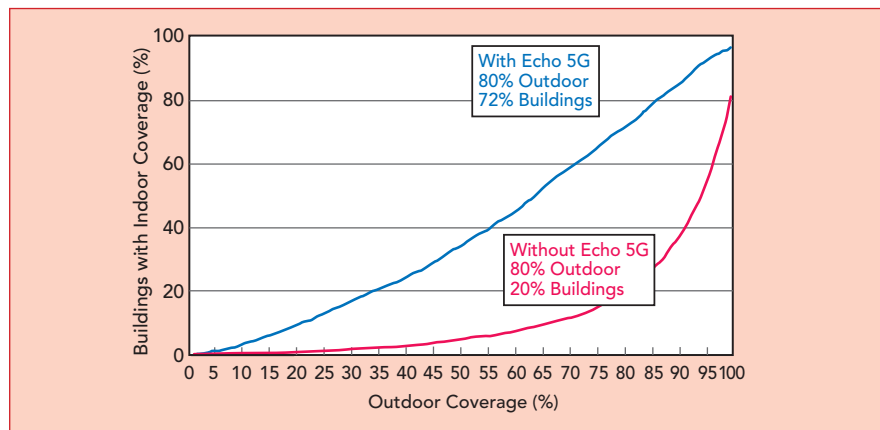

▲ Fig. 9 Outdoor vs. indoor coverage, suburban, without Echo (red) and with Echo (blue).

throughput results. The results printed in green are all LOS locations from the unit. The results in amber are non-LOS locations from Echo that Echo still served very well.

Without this product, full rate was only observed by placing the UE at the balcony door, as most of the interior was mmWave shadowed by the building wall (in red). Only the kitchen area indoors was not in the mmWave shadow, as it had LOS connectivity to gNB through the window. For other test locations, a mostly full rate experience was observed and locations that previously had no connectivity showed substantial throughput. Signal level measurements showed 20 to 30 dB improvement.

The number of gNBs needed to cover an area is the dominant factor in calculations of CAPEX and OPEX associated with a network deployment. This type of unit reduces the number of initially needed base stations dramatically, with 1 km distant LOS links becoming possible even



▲ Fig. 10 Pivot 5G prototype.

with outdoor to indoor penetration challenges.

Modeling suggests the served addressable market (SAM) can be doubled, even quadrupled, if this product is utilized to bring the mmWave signals indoors without adding additional gNBs. **Figures 8 and 9** show projections for urban and suburban environments, respectively. In both figures, the baseline is achieved outdoor coverage (x-axis). The benefit Echo 5G brings



**Covers the Spectrum
UHF to V-Band**

Applications: Satcom, Comms, 5G, EW, Radar...

Products / Solutions:

- Up and Down Converters
- Precision Frequency Synthesizers
- Low Noise Amplifiers
- Agile Frequency Sources and Converters
- Integrated Custom RF Products
- RF Power Controllers & Switch Assemblies
- Large Library of High Performance Products



Our 13th year of continued growth has been achieved by providing superior engineered solutions to the Defense and Communications communities.

We are a US owned company founded and led by engineers.

Contact us for either custom or catalog product solutions.



GeoSync Microwave, Inc. 320 Oser Avenue Hauppauge NY 11788

Phone: 631 760-5567 sales@geosyncmicrowave.com

www.geosyncmicrowave.com

Visit our booth #1838 at SATELLITE 2020

Content is copyright protected and provided for personal use only—not for reproduction or retransmission.
For reprints please contact the Publisher.

Priority: Source High-Reliability RF Cables

- ✓ Reliability
- ✓ J-STD Soldering
- ✓ Test Reports
- ✓ Lot Traceability



Pasternack.com



**Available for
Same-Day Shipping!**

PE PASTERNAK
an INFINITI brand

CoverFeature

is the additional indoor coverage (y-axis) depicted with the blue line in each of the plots.

Repeater Applications

Pivot 5G is an outdoor network repeater shown in **Figure 10**. As a base station proxy, the unit redirects mmWave signals from the gNB around obstacles and extends the range of 5G base stations.

A bring-your-own-device demonstration was set up for MWC Los Angeles 2019. This demonstrated Echo 5G and Pivot 5G in a real-world

environment, with commercial gNB and 5G UEs. The demo location was a meeting boardroom near the MWC venue, and the room lacked LOS to the gNB. Echo 5G was deployed on the window facing South Figueroa Street. From this position, the Echo 5G was located 300 ft. away from the gNB but lacked LOS to the gNB. Pivot 5G was deployed in the hotel parking lot to redirect coverage to Echo 5G. The topology is depicted in **Figure 11**.

Testing used a standard Samsung S10 5G phone. Each of the demos was benchmarked from inside the boardroom showing that 5G throughout is impossible without the units. In each test, the phone either could not connect to 5G or it connected with low throughput (< 100 Mbps). With Echo 5G and Pivot 5G on, throughput of 1000 Mbps on the 5G network, with the phone positioned 15 to 20 ft. in LOS of the Echo 5G, was consistently observed.

Moving into a hallway behind the boardroom, the phone did not initially connect to 5G. With the Echo 5G and Pivot 5G turned on, throughput of 800 Mbps was shown even with the phone positioned 20 to 30 ft. away and not in LOS of the Echo 5G.


Finally, 150 Mbps was achieved in a second hallway—two boundaries and over 30 ft. away from the window—by the Echo 5G and Pivot 5G. Without them, there was no 5G reception. The layout and the results are depicted in **Figure 12**.

SUMMARY

This article demonstrated the importance of beam forming in 5G mmWave networks and described three beam forming technologies: phased arrays, MU-MIMO and HBF. It claimed that HBF is particularly well-suited to 5G mmWave system designs and explained why, from a systems perspective, the use of low-cost mmWave repeaters is a crucial piece in the 5G deployment puzzle to avoid over-deployment of gNBs. Finally, the article elaborated on field trials and early success stories associated with 5G mmWave repeaters that use HBF. ■




▲ Fig. 11 Live demo setup for MWC Los Angeles 2019.

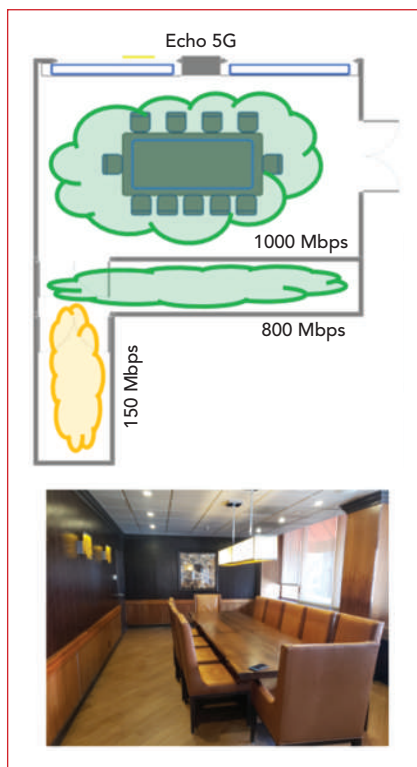

▲ Fig. 12 The layout of the indoor space and photo of the boardroom.

You Engineer the Future. We'll Supply the Components... Today!

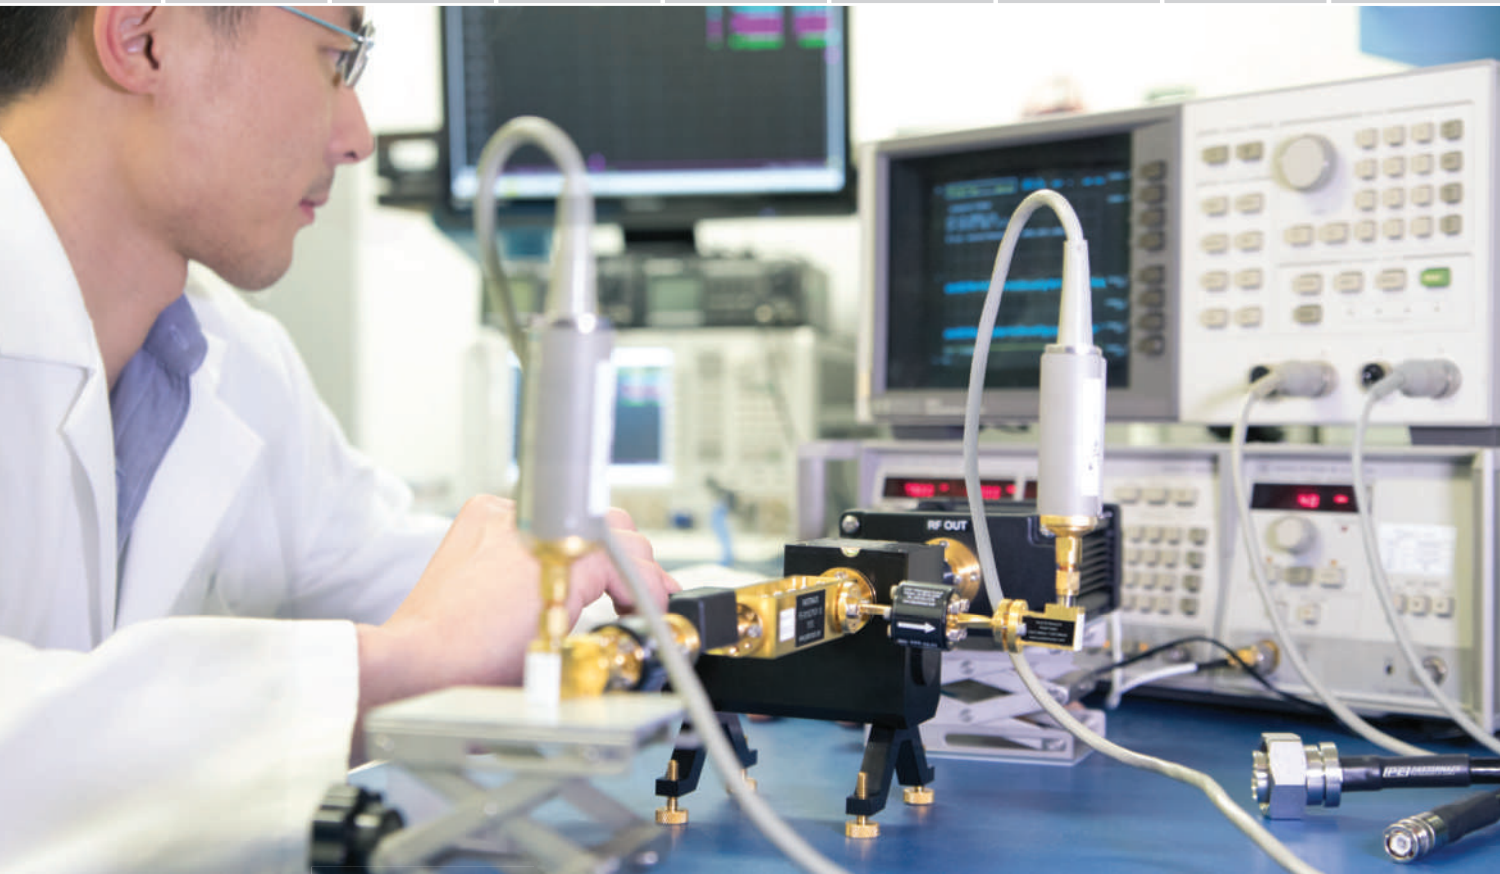

Largest Selection ✓ Same-Day Shipping ✓ Expert Technical Support ✓

Armed with the world's largest selection of in-stock, ready to ship RF components, and the brains to back them up, Pasternack Applications Engineers stand ready to troubleshoot your technical issues and think creatively to deliver solutions for all your RF project needs. Whether you've hit a design snag, you're looking for a hard to find part or simply need it by tomorrow, our Applications Engineers are at your service. Call or visit us at pasternack.com to learn more.

866.727.8376
Pasternack.com

PE PASTERNAK
an INFINIT[®] brand

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.
For reprints please contact the Publisher.

Dielectric Resonator Antenna Arrays for 5G Wireless Communications

Diego Caratelli, Ali Al-Rawi, James Song and David Favreau
The Antenna Company, Eindhoven, Netherlands

Global deployments of 5G networks are on a rapid pace and are expected to deliver a 100× increase in network capacity compared to 4G. To expand network capacity, the 5G NR air interface enables diverse spectrum in both the sub-6 GHz and mmWave frequency bands. The additional spectrum enabled by 5G brings new challenges for product design and global deployment, particularly in the mmWave frequency range. Customer premise equipment (CPE) solutions that operate in the mmWave frequency band are required to bring 5G fixed wireless access (FWA) to urban and suburban landscapes. To achieve the high data rates and low latencies promised by 5G, the antenna system becomes a crucial component in the overall system design. The Antenna Company is developing mmWave active antenna arrays for CPE applications that utilize novel materials and advanced antenna design strategies to address the performance limitations of conventional printed circuit board (PCB) solutions. This article discusses the performance benefits of utilizing a 64-element dielectric resonator antenna (DRA) array.

DRA BENEFITS FOR 5G

The new generation of 5G wireless communications is designed to provide mobile users with fiber-like data speeds, low latency and high signal fidelity. Industry-wide development efforts to enable these performance breakthroughs include advanced channel coding techniques, massive MIMO and mobile mmWave. Breakthroughs in antenna system design are crucial for the global use of mmWave spectrum. In addition to providing radio coverage, antenna systems must be able to reconfigure the radiation pattern characteristics to meet the dynamics in 5G wireless communications.¹

Advances in material science and manufacturing make DRA technology a valid solution for the development of commercial array antennas. DRAs share several features with their counterpart, patch antennas; they are compact and are easy to integrate with active electronics. However, DRAs are more efficient than patch antennas at mmWave frequencies due to the high conduction loss. In addition, DRAs can provide more design freedom, compared to patch antennas, in relation to the geometry and materials forming the basic dielectric resonating structure. Different feeding techniques, design procedures and DRA structures can be found in review papers.²⁻³ Long

et al. systematically studied the radiation characteristics of different DRAs and their potential for mmWave applications.⁴ It is shown that DRAs are compact, lightweight, cost-effective and feature broader bandwidth (BW) characteristics and large scanning angles up to ± 60 degrees and beyond, as compared to patch antennas.⁵⁻⁶

The BW of phased array antennas is mostly determined by the active reflection coefficient during beam steering that affects the scan-loss characteristics of the antenna array. In addition, the shape of the embedded element pattern plays an important role. The mutual coupling can degrade the pattern by modifying the embedded pattern



GaAs

MIXERS

FUNDAMENTAL / IQ / SUB-HARMONIC



Part Number	Freq. Range	Description
CMD258C4	7.5 - 13 GHz	High IP3 I/Q Mixer
CMD313	6 - 45 GHz	Fundamental Mixer
CMD310C3	20 - 32 GHz	Sub-harmonic Mixer



The fastest growing MMIC portfolio in the industry

Custom MMIC is introducing products at a record pace with 39 high performance MMICs released in 2019. Our growing team and expanded design and manufacturing capabilities are driving exciting new products for the new year. Download our newly updated product selection guide to see our full portfolio of world-class products.

We have the right mixer for your application

Low noise figure and high linearity frequency mixing are paramount when it comes to today's advanced precision RF and Microwave applications in Aerospace/Defense, Instrumentation and Satellite Communications. You can design with confidence knowing Custom MMIC products are designed and tested to the highest standards in the industry.

Where can we take you next?



Content is copyright protected and provided for personal use only - not for reproduction or retransmission. For reprints please contact the Publisher.

shape and the realized excitation coefficients.

An 8×8 array of dielectric resonator antennas fed by slot antennas is proposed for mmWave 5G wireless communications. The total radiation efficiency is modeled as a function of frequency and beam steering. It is shown that the total radiation efficiency is higher than 80 percent over the frequency band from 26 to 34 GHz and for scan angles up to 60 degrees. The DRA can perform beam

steering over wide BW with a scan-loss comparable to the array factor of an ideal source. In addition, the DRA array is 20 percent smaller in size compared to conventional half-wavelength spaced antenna arrays.


In this article, attention is given to the optimal design of hybrid DRA/slot antennas. It will be shown that the antenna impedance BW can be easily tuned in such a way as to synthesize a wide- or multi-band frequency response.

ANTENNA ARRAY DESIGN

Individual Antenna Element Design

A single array antenna element consists of a slot antenna fed by proximity coupling via a microstrip transmission line. The dielectric material for the transmission line is RO4308 with relative permittivity (ϵ_r) of 3.6. The slot then feeds a square dielectric rod, as illustrated in **Figure 1**. In this design a dielectric material with $\epsilon_r = 11.3$ is used in the analysis. With a proper selection of dimensions similar to Keyrouz and Caratelli,⁵ the slot antenna radiates properly and excites the proper modes in the dielectric rod (Transverse Magnetic modes). A detailed mode analysis can be found in Long et al.⁴

By using a fork-like microstrip line to feed the aperture slot (see **Figure 2**), the impedance can be well matched to 50 Ω with a broadband reflection coefficient better than -10 dB over the frequency range from 26 to 30 GHz (see Figure 1). In particular, the antenna element is fitted with a suitable mini-SMP connector, as shown in **Figure 3**. Notice that the considered DRA element displays a radiation pattern that is mostly confined in the half-sphere above the relevant ground plane.

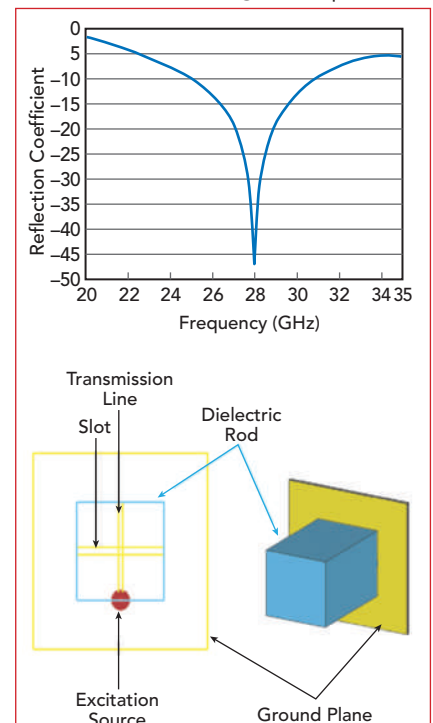

▲ Fig. 1 Magnitude of the input reflection coefficient of the individual DRA element (the illustration shows the configuration of the radiating structure).

The New Wave is Approaching



Solutions for 5G & mmWave Applications

KRYTAR specializes in the design and manufacturing of ultra-broadband, high-performance microwave components and test equipment. Our products cover DC to 110 GHz and are the ultimate solution for the emerging designs and test and measurement applications for 5G and mmWave. The broadband design expertise at KRYTAR has created unique new designs, several of which are patented. KRYTAR has applied these designs to consistently introduce technologically advanced products with superior electrical performance and ruggedness.



- ❑ Directional Couplers to 110 GHz
- ❑ Power Dividers
- ❑ 3 dB 90 Degree Hybrid Couplers
- ❑ 3 dB 180 Degree Hybrid Couplers
- ❑ Beamforming




www.krytar.com

1288 Anvilwood Avenue • Sunnyvale, CA 94089

Toll FREE: +1.877.734.5999 • FAX: +1.408.734.3017 • E-mail: sales@krytar.com

Blue Chip Performers

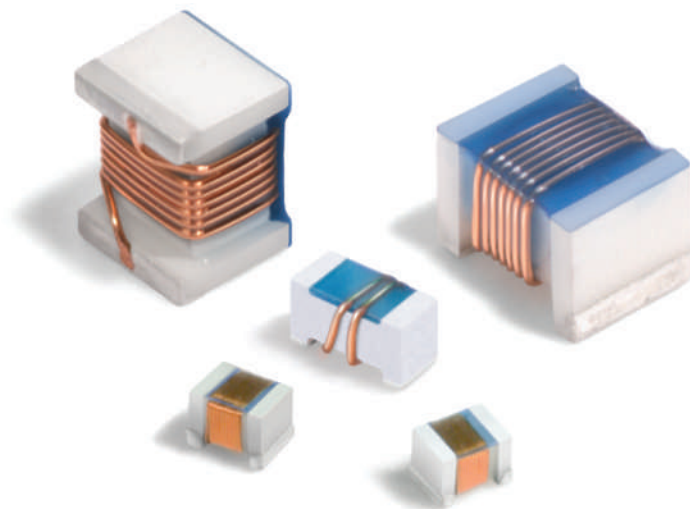

Exceptionally high Q, low DCR and a wide range of inductance values make our wirewound chip inductors a sure bet!

Engineers love our high-performance, low-cost, wirewound ceramic chip inductors; considered by most to be the best performing wirewounds available.

For example, our 0201HL Series is offered in seven inductance values ranging from 22 to 51 nH – the highest currently offered in an 0201 (0603) package – making them fully optimized for impedance matching in 700 MHz band LTE and 5G applications.


Our 0402DC and 0805HP Series provide the industry's highest Q factors in their respective sizes for super low loss in high frequency circuits. Select values from 2.6 to 820 nH, including 0.1 nH increments from 2.8 to 10 nH in the 0402DC Series.

Find out why our customers are so bullish on our wirewound ceramic chip inductors. Order your free samples today at www.coilcraft.com.



WWW.COILCRAFT.COM

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.
For reprints please contact the Publisher.

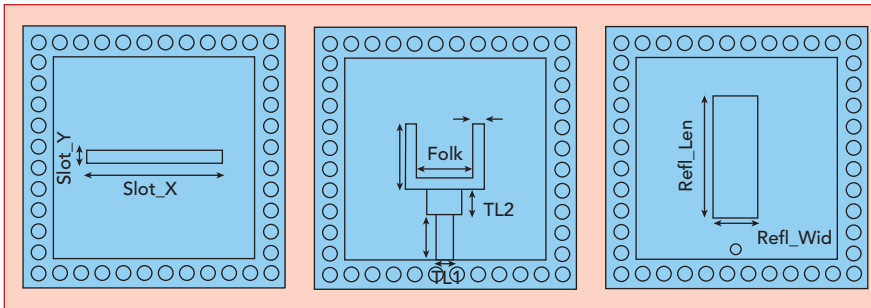

▲ Fig. 2 Antenna element feeding structure.


Antenna Array Scan Properties

The aperture-fed DRA detailed in the previous section is placed in a uniform 64-element array consisting of 8×8 elements, as shown in **Figure 4**. The inter-element spacing is about half-wavelength at 28 GHz. The objective is to examine the array performance while beam steering over the operational range of frequencies.

For a two-dimensional planar array, the beam steering angle (θ , φ) can be controlled by setting certain phase values at the (m , n)th port according to Equation 1, in which m and n stand for row and column, d_x and d_y stand for the spacing in x- and y- direction, respectively.⁹

$$\phi_{m,n}(\theta, \varphi) = k_0 \left[\left(m + \frac{1}{2} \right) d_x \sin \theta \cos \varphi + \left(n + \frac{1}{2} \right) d_y \sin \theta \sin \varphi \right] \quad (1)$$

As shown in **Figure 5**, the phased DRA array features wideband characteristics. The total radiation efficiency is better than 80 percent over the frequency band between 26 and 34 GHz along the H-plane. Also, the DRA array displays nearly flat efficiency characteristics over a wide scan range. Such high performance is related to the fact the

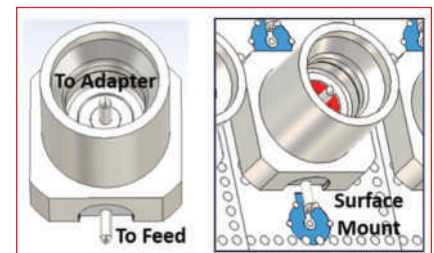

▲ Fig. 3 Integration of mini-SMP connector to the individual DRA element.



▲ Fig. 4 Three-dimensional view of an 8×8 array of uniformly spaced DRA elements.

BETTER COMMUNICATION SOLUTIONS

MECA Products & Equipment

MECA Electronics (Microwave Equipment & Components of America) has served the RF & Microwave industry with equipment and passive components since 1961. Now with expanded capabilities up to 50GHz including Power Dividers, Couplers, Attenuators, Terminations and Isolators. MECA is a privately held ISO9001:2015 registered global designer and manufacturer for the communications industry with products manufactured in the USA.

EN50155
Aeronautical/Space
Transportation

IP67/68
AMER, EMEA,
& D.A.S

IP67/68
Public Safety
Homeland Security

MIL DTL 23971 MIL DTL 15370
Satcom, mmWave
& Military

MECA Electronics, Inc.
Microwave Equipment & Components of America
The Professional's Choice for RF/Microwave Passive Components
459 E. Main St., Denville, NJ 07834
Tel: 973-625-0661 Fax: 973-625-9277 Sales@e-MECA.com

Real-time spectrum analysis that fits in your pocket.

AVAILABLE FOR
\$2,995
US RETAIL

Includes Software

BB60C

6 GHz Real-Time Spectrum Analyzer

Sweeps at 24 GHz/sec

Captures RF events as short as 1 μ s with 100% probability of intercept (POI)



9 kHz to 6 GHz frequency range

Selectable streaming bandwidths from 250 kHz up to 27 MHz

Powered by USB, only 8.63" x 3.19" x 1.19"

Includes Spike™ spectrum analysis software with real-time analysis, interference hunting, spectrum emission mask, WLAN analysis, and digital modulation analysis modules. API also included for custom applications.

Little to no lead-time | Extended temperature options available

Signal Hound

SignalHound.com

Made in the USA 

© 2020 Signal Hound, Inc. All rights reserved.



40 GHz CW Signal Source

- 160 MHz to 40 GHz
- -10 dBm to +15 dBm typ amplitude range
- PN -115 dBc/Hz @ 10 kHz @ 18 GHz
- Maximum power > 15 dBm typ
- 1 Hz tuning resolution



Made
in the
USA
www.signalcore.com

Compact. Rugged.
High Performance.



MODULAR FREQUENCY CONVERTERS

High-performance custom multi-channel frequency converters featuring exceptional signal linearity, low noise, fast switching wide-band frequency coverage. Ranges from 500 MHz to 40 GHz.

Microwave Solutions
www.craneae.com




Visit us at Satellite 2020 | Booth 442 | March 9 - 12


CoverFeature

DRA radiating elements are wideband and the electromagnetic field is confined within the relevant dielectric rod. As a result, the inter-element coupling is much smaller as compared to patch array antennas. A comparable patch array antenna with equivalent aperture and inter-element spacing displays a much narrower band performance with a poor efficiency away from the central resonant frequency, as it appears from **Figure 6**. The patch array elements are fed via slots. The dielectric laminate on which the patch antenna elements are printed is RO4308 with relative permittivity of $\epsilon_r = 3.6$.

The active reflection coefficient of the array is significantly more complicated to evaluate as it requires the evaluation of the mutual coupling data between the activated array element and the adjacent elements. Based on the derivation in Pozar,⁷ for a two-dimensional planar array, the active reflection coefficient Γ can be calculated by Equation 2, where $S_{m,n}$ stands for the mutual coupling coefficient between the m-th and n-th ports. As shown in **Figure 7**, the broadband characteristics of the proposed DRA array, as compared to the equiva-

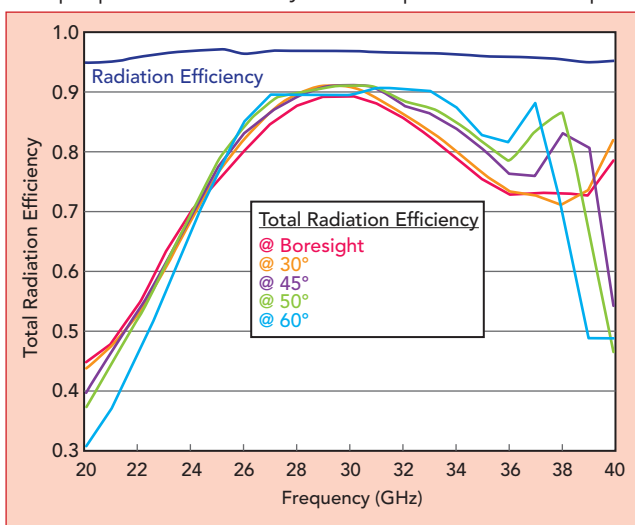


▲ Fig. 5 Total radiation efficiency of the 8x8 DRA array shown in Figure 4 as a function of scan angles and frequency along the H-plane.

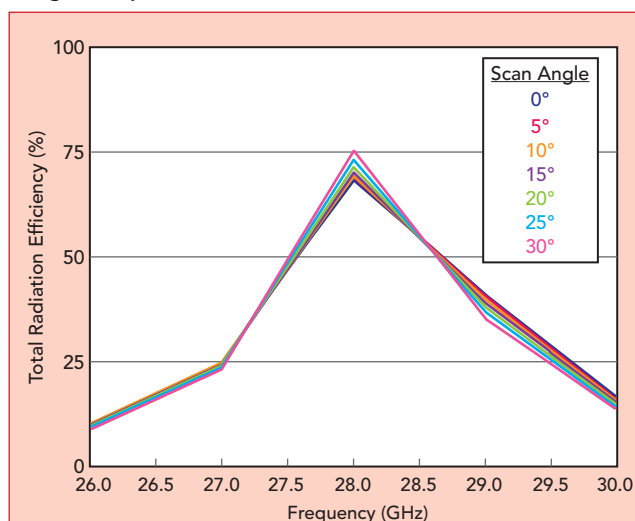

▲ Fig. 6 Total radiation efficiency of a patch array antenna as a function of frequency and scan angle.

Best phase performance no matter the temperature

Visit us
at
Satellite 2020
Washington, USA
Booth #1646

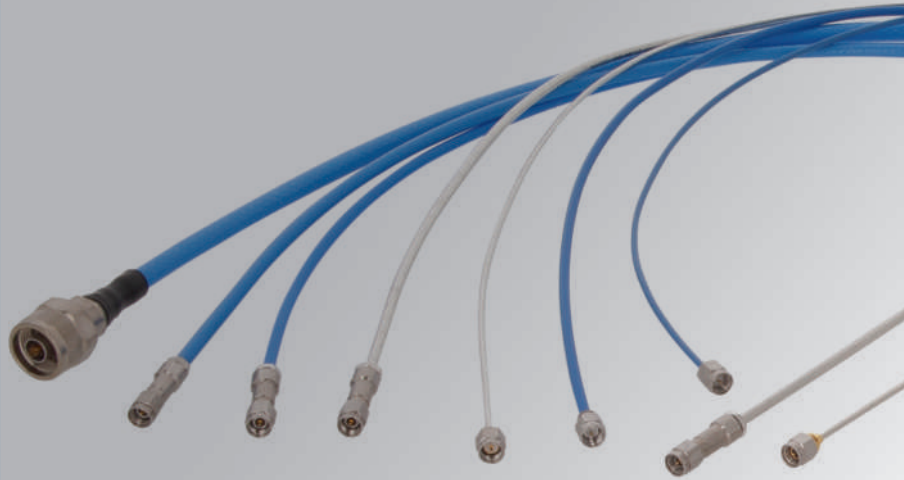

HUBER+SUHNER Constant over Temperature (CT) assemblies offer a reliable and phase invariant interconnect solution to satisfy a broad range of RF applications where phase stability over temperature is key, e.g. Aerospace & Defense, Test & Measurement and Industrial environments. They increase system accuracy by suppressing the abrupt phase change observed at room temperature with conventional PTFE-based assemblies and are available in a wide selection of cable size and design.

Increased System Accuracy



High System Performance



Proven Product Reliability



ULTRA LOW POWER PRECISION CLOCKS

• OCXO & GPSDO •


NEWSPACE - EWOS5500



Flight Proven
Mega constellation
165 mW, 20 MHz

INDUSTRIAL/DEFENSE - SGT M10HP


PPS sync. 1 ns
 ± 1 ppb
400 mW, 10 MHz




time-frequency@syrlinks.com

From USA: sales@beacon-tech.com


CoverFeature

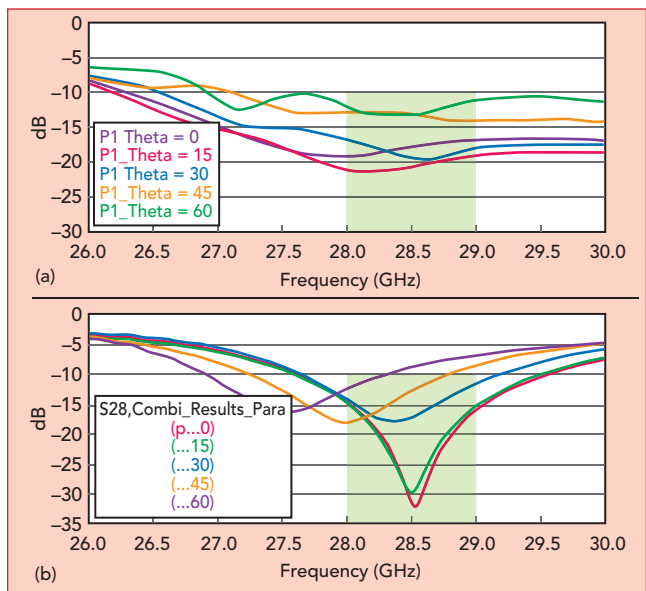

▲ Fig. 7 Frequency-domain behavior of the magnitude of the active input reflection coefficient displayed by an 8x8 array of DRA (a) and patch antennas (b) for $\phi = 0^\circ$ and $\theta = 0^\circ, 15^\circ, 30^\circ, 45^\circ, 60^\circ$.

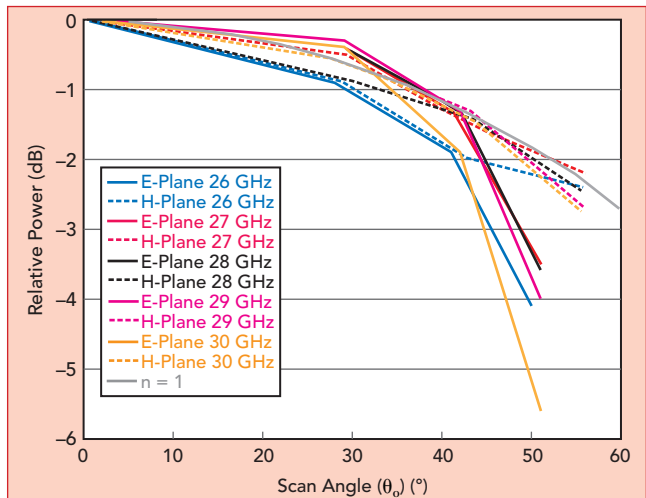

▲ Fig. 8 Beam steering scan loss displayed by the 8x8 DRA array with scan loss evaluated as a function of frequency along the relevant E- and H-planes.

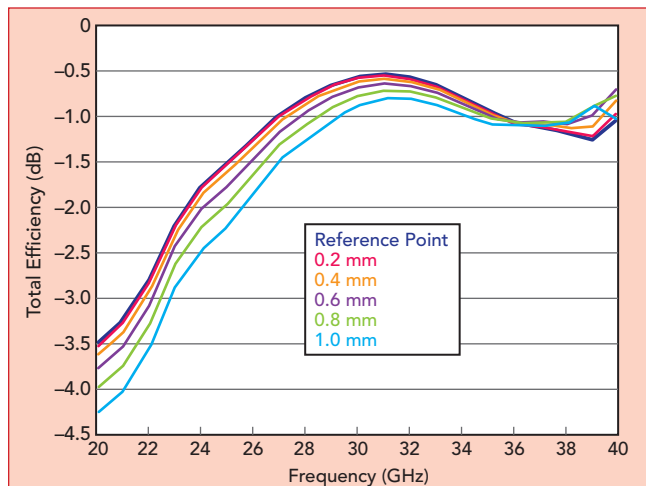

▲ Fig. 9 Total efficiency of the 8x8 DRA array as a function of the misplacement of the radiating structure on the circuit board containing the relevant feeding network.




Serving Hi-Rel, Space and Defense, Public Safety,
Satellite and Commercial Wireless Markets

Miniature Ceramic Filter One-Size-Fits-All, UHF to L-Band

Constant Insertion Loss and Skirt Amplitudes (-40 to +85°C)

SAME LOW PROFILE PACKAGE
.550" X .425" X .122"

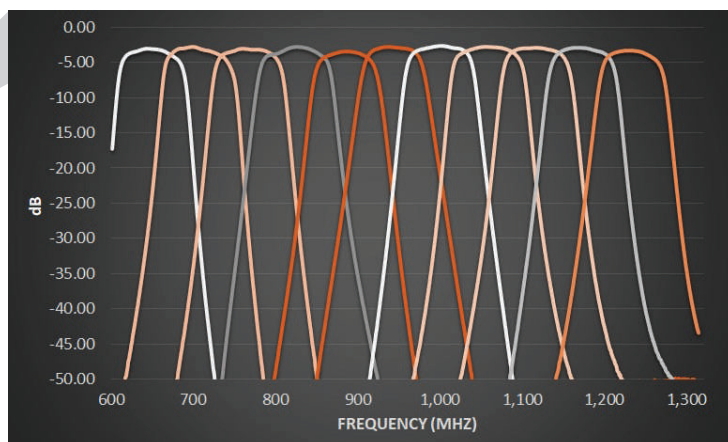

858.450.0468

mcv-microwave.com

sales@mcv-microwave.com

Locations:

San Diego, CA & Laurel, DE



Made in USA

SPECIALIZING IN

High Performance Ceramic, Cavity, LC Filter

Smallest Footprint and Low profile

Narrow and Wide Bandwidth

Low PIM, 173 dBc @ 2 x 43 dBm

Contiguous Multiplexer

High Quality, On-time Delivery

Volume Production

Revolutionary Signal Integrity Solutions

Frequency from DC to mmWave

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.
For reprints please contact the Publisher.

lent structure based on patch antenna elements, are also validated in active mode, that is while beam scanning. The considered array structures feature equivalent inter-element spacing and aperture.

$$\frac{V_{m,n}}{V_{0,0}} = e^{-jk_0[m d_x \sin \theta \cos \phi + n d_y \sin \theta \sin \phi]}$$

$$\Gamma = \sum_m \sum_n S_{m,n} \left(\frac{V_{m,n}}{V_{0,0}} \right) \quad (2)$$

In **Figure 8**, the scan-loss characteristics along both the H- and E-plane are evaluated. From the obtained results, it can be inferred that the scan loss along the H-plane follows the array factor of an ideal cosine source. The performance is just slightly degraded along the E-plane. This difference is mainly due to the asymmetry of the average embedded pattern of the array. On the other hand, a significant advantage

is related to the fact that the array performance is stable over a very large frequency band.

As it appears in **Figure 9**, the proposed DRA array displays robust performance also against manufacturing tolerances related to the misalignment or misplacement of the radiating structure on the circuit board containing the relevant feeding network. This is important to ensure reduced sensitivity of the array to non-idealities typically encountered in mass-production assembly lines.

CONCLUSION

The antenna impedance bandwidth can be easily tuned in such a way to synthesize a wide- or multi-band frequency response by the combination of DRAs and radiating slots. The proposed DRA array achieves a total radiation efficiency better than 80 percent in the band from 26 to 34 GHz and large scanning angles compared to a conventional half-wavelength spaced patch antenna array. With the advances in material science and manufacturing techniques, DRA technology can become a cost-effective, high performance solution for 5G wireless communications. ■

References

1. IEEE 5G, "IEEE 5G and Beyond Technology Roadmap White Paper," 2017, <https://futurenetworks.ieee.org/images/files/pdf/ieee-5g-roadmap-white-paper.pdf>.
2. K. W. Leung, E. H. Lim and X. S. Fang, "Dielectric Resonator Antennas: From the Basic to the Aesthetic," *Proceedings of the IEEE*, Vol. 100, No. 7, 2012, pp. 2181–2193.
3. A. Petosa and A. Ittipiboon, "Dielectric Resonator Antennas: A Historical Review and the Current State of the Art," *IEEE Antennas and Propagation Magazine*, Vol. 52, No. 5, October 2010, pp. 91–116, <http://ieeexplore.ieee.org/document/5687510/>.
4. S. A. Long, M. W. McAllister and L. C. Shen, "The Resonant Cylindrical Dielectric Cavity Antenna," *IEEE Transactions on Antennas and Propagation*, Vol. 31, No. 3, 1983, pp. 406–412.
5. S. Keyrouz and D. Caratelli, "Dielectric Resonator Antennas: Basic Concepts, Design Guidelines, and Recent Developments at Millimeter-Wave Frequencies," *International Journal of Antennas and Propagation*, Vol. 2016, pp. 1–20, www.hindawi.com/journals/ijap/2016/6075680/.
6. M. Simeoni, R. Cicchetti, A. Yarovsky and D. Caratelli, "Plastic-Based Supershaped Dielectric Resonator Antennas for Wide-Band Applications," *IEEE Transactions on Antennas and Propagation*, Vol. 59, No. 12, December 2011, pp. 4820–4825.
7. D. M. Pozar, "The Active Element Pattern," *IEEE Transactions on Antennas and Propagation*, Vol. 42, No. 8, August 1994, pp. 1176–1178.

Your Global Source for RF, Millimeter Wave and Terahertz Technologies.



IMPULSE
TECHNOLOGIES INC.
AN INTERNATIONAL PROCUREMENT COMPANY

Spend more time developing solutions and less time searching for what you need to get you there.

At Impulse Technologies, we've been distributing DC thru-Terahertz products as our top priority since 1991. We pride ourselves on our unmatched ability to quickly deliver a wide range of quality products from top name manufacturers in the industry. Constantly in search of the latest in cutting-edge technology, from the smallest components to the most powerful test equipment, our greatest strength is helping our clients confidently secure everything needed for day to day production.

Depend on Impulse Technologies as your logistics management specialist and most trusted advisor & source.

Impulse Technologies: A proven solution since 1991!
To learn more, contact us at **+1 (631) 968-4116** or **sales@impulse-technologies.com**






Now the exclusive US Representative of

REspin



DRH40
4 GHz - 40 GHz
IN STOCK



DRH50
5 GHz - 50 GHz
IN STOCK



DRH67
6 GHz - 67 GHz
IN STOCK



DRH110
14 GHz - 110 GHz
IN STOCK



QRH18
1 GHz - 18 GHz
IN STOCK



QRH20E
1.7 GHz - 20 GHz
IN STOCK



QRH40
4 GHz - 40 GHz
IN STOCK



QRH50
5 GHz - 50 GHz
IN STOCK



Copenhagen, Denmark
March 15-20, 2020
Visit Stand 16

www.impulse-tech.com

Radar

L,S,C, and X-Bands

GaN Solid-State Product Portfolio

RFHIC's latest **L/S/C& X-Band GaN Solid-State** Product Portfolio Designed for **Air Traffic Control Radar, SMR, VTS, and Weather Radar Applications.**

Providing Customers with Lower OPEX Costs, Exceptional Reliability, and Controllability to Enhance Next Generation Radar Solutions.




Available
up to 20kW



S-band
2.5kW SSPA

RRP27312K5-30



C-band
1.3kW SSPA

RRP54591K3-43



L-band
1kW SSPA

RRP131K0-10

Scalable GaN Solid-State Solutions

- Providing up to 10% Duty enabling Higher Processing Gain
- Better Detection Range = Using Less Power
- High Reliability (MTBF) and Low Mean Time to Repair
- Redundant Architecture to Maximize On Air Power*
- Compact Size for Easy Mobility
- Industry Leading SWaP- Size, Weight, and Power
- COTS and Custom Design Solutions at the Module and System Level with Output Power Levels up to multi-kW

*Available Upon Request

To learn more contact us at rfsales@rfhic.com
for an engineering assessment of your
system requirements.

RFHIC



**World ATM
Congress 2020**

A CANSO partnership with ATCA

Visit us at Booth #1384

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.
For reprints please contact the Publisher.

RF Amplifiers and Sub-Assemblies for Every Application

Delivery from Stock to 2 Weeks ARO from the catalog or built to your specifications!

- Competitive Pricing & Fast Delivery
- Military Reliability & Qualification
- Various Options: Temperature Compensation, Input Limiter Protection, Detectors/TTL & More
- Unconditionally Stable (100% tested)

ISO 9001:2000
and AS9100B
CERTIFIED

OCTAVE BAND LOW NOISE AMPLIFIERS

Model No.	Freq (GHz)	Gain (dB) MIN	Noise Figure (dB)	Power-out @ P1-dB	3rd Order ICP	VSWR
CA01-2110	0.5-1.0	28	1.0 MAX, 0.7 TYP	+10 MIN	+20 dBm	2.0:1
CA12-2110	1.0-2.0	30	1.0 MAX, 0.7 TYP	+10 MIN	+20 dBm	2.0:1
CA24-2111	2.0-4.0	29	1.1 MAX, 0.95 TYP	+10 MIN	+20 dBm	2.0:1
CA48-2111	4.0-8.0	29	1.3 MAX, 1.0 TYP	+10 MIN	+20 dBm	2.0:1
CA812-3111	8.0-12.0	27	1.6 MAX, 1.4 TYP	+10 MIN	+20 dBm	2.0:1
CA1218-4111	12.0-18.0	25	1.9 MAX, 1.7 TYP	+10 MIN	+20 dBm	2.0:1
CA1826-2110	18.0-26.5	32	3.0 MAX, 2.5 TYP	+10 MIN	+20 dBm	2.0:1

NARROW BAND LOW NOISE AND MEDIUM POWER AMPLIFIERS

CA01-2111	0.4-0.5	28	0.6 MAX, 0.4 TYP	+10 MIN	+20 dBm	2.0:1
CA01-2113	0.8-1.0	28	0.6 MAX, 0.4 TYP	+10 MIN	+20 dBm	2.0:1
CA12-3117	1.2-1.6	25	0.6 MAX, 0.4 TYP	+10 MIN	+20 dBm	2.0:1
CA23-3111	2.2-2.4	30	0.6 MAX, 0.45 TYP	+10 MIN	+20 dBm	2.0:1
CA23-3116	2.7-2.9	29	0.7 MAX, 0.5 TYP	+10 MIN	+20 dBm	2.0:1
CA34-2110	3.7-4.2	28	1.0 MAX, 0.5 TYP	+10 MIN	+20 dBm	2.0:1
CA56-3110	5.4-5.9	40	1.0 MAX, 0.5 TYP	+10 MIN	+20 dBm	2.0:1
CA78-4110	7.25-7.75	32	1.2 MAX, 1.0 TYP	+10 MIN	+20 dBm	2.0:1
CA910-3110	9.0-10.6	25	1.4 MAX, 1.2 TYP	+10 MIN	+20 dBm	2.0:1
CA1315-3110	13.75-15.4	25	1.6 MAX, 1.4 TYP	+10 MIN	+20 dBm	2.0:1
CA12-3114	1.35-1.85	30	4.0 MAX, 3.0 TYP	+33 MIN	+41 dBm	2.0:1
CA34-6116	3.1-3.5	40	4.5 MAX, 3.5 TYP	+35 MIN	+43 dBm	2.0:1
CA56-5114	5.9-6.4	30	5.0 MAX, 4.0 TYP	+30 MIN	+40 dBm	2.0:1
CA812-6115	8.0-12.0	30	4.5 MAX, 3.5 TYP	+30 MIN	+40 dBm	2.0:1
CA812-6116	8.0-12.0	30	5.0 MAX, 4.0 TYP	+33 MIN	+41 dBm	2.0:1
CA1213-7110	12.2-13.25	28	6.0 MAX, 5.5 TYP	+33 MIN	+42 dBm	2.0:1
CA1415-7110	14.0-15.0	30	5.0 MAX, 4.0 TYP	+30 MIN	+40 dBm	2.0:1
CA1722-4110	17.0-22.0	25	3.5 MAX, 2.8 TYP	+21 MIN	+31 dBm	2.0:1

ULTRA-BROADBAND & MULTI-OCTAVE BAND AMPLIFIERS

Model No.	Freq (GHz)	Gain (dB) MIN	Noise Figure (dB)	Power-out @ P1-dB	3rd Order ICP	VSWR
CA0102-3111	0.1-2.0	28	1.6 Max, 1.2 TYP	+10 MIN	+20 dBm	2.0:1
CA0106-3111	0.1-6.0	28	1.9 Max, 1.5 TYP	+10 MIN	+20 dBm	2.0:1
CA0108-3110	0.1-8.0	26	2.2 Max, 1.8 TYP	+10 MIN	+20 dBm	2.0:1
CA0108-4112	0.1-8.0	32	3.0 MAX, 1.8 TYP	+22 MIN	+32 dBm	2.0:1
CA02-3112	0.5-2.0	36	4.5 MAX, 2.5 TYP	+30 MIN	+40 dBm	2.0:1
CA26-3110	2.0-6.0	26	2.0 MAX, 1.5 TYP	+10 MIN	+20 dBm	2.0:1
CA26-4114	2.0-6.0	22	5.0 MAX, 3.5 TYP	+30 MIN	+40 dBm	2.0:1
CA618-4112	6.0-18.0	25	5.0 MAX, 3.5 TYP	+23 MIN	+33 dBm	2.0:1
CA618-6114	6.0-18.0	35	5.0 MAX, 3.5 TYP	+30 MIN	+40 dBm	2.0:1
CA218-4116	2.0-18.0	30	3.5 MAX, 2.8 TYP	+10 MIN	+20 dBm	2.0:1
CA218-4110	2.0-18.0	30	5.0 MAX, 3.5 TYP	+20 MIN	+30 dBm	2.0:1
CA218-4112	2.0-18.0	29	5.0 MAX, 3.5 TYP	+24 MIN	+34 dBm	2.0:1

LIMITING AMPLIFIERS

Model No.	Freq (GHz)	Input Dynamic Range	Output Power Range Psat	Power Flatness dB	VSWR
CLA24-4001	2.0-4.0	-28 to +10 dBm	+7 to +11 dBm	+/- 1.5 MAX	2.0:1
CLA26-8001	2.0-6.0	-50 to +20 dBm	+14 to +18 dBm	+/- 1.5 MAX	2.0:1
CLA712-5001	7.0-12.4	-21 to +10 dBm	+14 to +19 dBm	+/- 1.5 MAX	2.0:1
CLA618-1201	6.0-18.0	-50 to +20 dBm	+14 to +19 dBm	+/- 1.5 MAX	2.0:1

AMPLIFIERS WITH INTEGRATED GAIN ATTENUATION

Model No.	Freq (GHz)	Gain (dB) MIN	Noise Figure (dB)	Power-out @ P1-dB	Gain Attenuation Range	VSWR
CA001-2511A	0.025-0.150	21	5.0 MAX, 3.5 TYP	+12 MIN	30 dB MIN	2.0:1
CA05-3110A	0.5-5.5	23	2.5 MAX, 1.5 TYP	+18 MIN	20 dB MIN	2.0:1
CA56-3110A	5.85-6.425	28	2.5 MAX, 1.5 TYP	+16 MIN	22 dB MIN	1.8:1
CA612-4110A	6.0-12.0	24	2.5 MAX, 1.5 TYP	+12 MIN	15 dB MIN	1.9:1
CA1315-4110A	13.75-15.4	25	2.2 MAX, 1.6 TYP	+16 MIN	20 dB MIN	1.8:1
CA1518-4110A	15.0-18.0	30	3.0 MAX, 2.0 TYP	+18 MIN	20 dB MIN	1.85:1

LOW FREQUENCY AMPLIFIERS

Model No.	Freq (GHz)	Gain (dB) MIN	Noise Figure dB	Power-out @ P1-dB	3rd Order ICP	VSWR
CA001-2110	0.01-0.10	18	4.0 MAX, 2.2 TYP	+10 MIN	+20 dBm	2.0:1
CA001-2211	0.04-0.15	24	3.5 MAX, 2.2 TYP	+13 MIN	+23 dBm	2.0:1
CA001-2215	0.04-0.15	23	4.0 MAX, 2.2 TYP	+23 MIN	+33 dBm	2.0:1
CA001-3113	0.01-1.0	28	4.0 MAX, 2.8 TYP	+17 MIN	+27 dBm	2.0:1
CA002-3114	0.01-2.0	27	4.0 MAX, 2.8 TYP	+20 MIN	+30 dBm	2.0:1
CA003-3116	0.01-3.0	18	4.0 MAX, 2.8 TYP	+25 MIN	+35 dBm	2.0:1
CA004-3112	0.01-4.0	32	4.0 MAX, 2.8 TYP	+15 MIN	+25 dBm	2.0:1

CIAO Wireless can easily modify any of its standard models to meet your "exact" requirements at the Catalog Pricing.

Visit our web site at www.ciaowireless.com for our complete product offering.





Air Force, Navy, Army Conduct First 'Real World' Test of ABMS

In the first field test of a novel approach to warfighting, communicating and decision-making, the Air Force, Navy and Army recently used new methods and technology for collecting, analyzing and sharing information in real-time to identify and defeat a simulated cruise missile threat to the U.S.

A three-day long exercise of the Advanced Battle Management System (ABMS) tested technology being developed to enable the military's developing concept called Joint All-Domain Command and Control (JADC2). When fully realized, senior leaders say JADC2 will be the backbone of operations and deterrence, allowing U.S. forces from all services as well as allies to orchestrate military operations across all domains, such as sea, land, air, space and cyber operations. The technology under development via ABMS enables this concept by simultaneously receiving, fusing and acting upon a vast array of data and information from each of these domains—all in an instant. The Air Force expects to receive around \$185 million this fiscal year for this effort and intends to bolster these resources over the next five years, underscoring both its importance and potential. This initial exercise focused on defending the homeland. This demonstration was the first of its kind in a series of exercises scheduled to occur roughly every four months. Each new exercise will build on the one before and include responses to problems and lessons learned.

Aircraft from the Air Force and Navy, a Navy destroyer, an Army air defense sensor and firing unit, a special operations unit, as well as commercial space and ground sensors came together to confront—and defeat—a simulated threat to the U.S. homeland. Upon detection of a potential cruise missile threatening the U.S. simulated by QF-16s, the information was relayed in quick succession using new software, communications equipment and a “mesh network” to the USS Thomas Hudner, an Arleigh Burke-class destroyer deployed in the Gulf of Mexico. The same information was passed to a pair of Air Force F-35s and another pair of F-22s. Also receiving the information were commanders at Eglin AFB, a pair of Navy F-35s, an Army unit equipped with a mobile missile launcher known as HIMARS and special forces on the ground.

Events culminated when senior leaders from across the DoD arrived at the test's command and control hub for an ABMS overview and abbreviated exercise. In a well-secured room, they watched real-time data pour in, and out of, the command cell. They observed information from platforms and people flowing instantly and simultaneously across air, land, sea and space that provided shared situational updates as events occurred whether the information originated from jets or passing

satellites or from sea and ground forces on the move. Then, the group transitioned to outdoor tents to continue the exercise in a rugged environment.

“Today's demo is our first time demonstrating IoT connectivity across the joint force,” Air Force Acquisitions Lead Dr. Will Roper said. “Cloud, mesh networking and software-defined systems were the stars of the show, all developed at commercial internet speeds.” He also spoke to the necessity of industry partnership and leveraging their expertise. “Our four-month ‘connect-a-thon’ cycle unlocks industry's ability to iterate with testers, acquirer and warfighters. For example, the insights from connecting the F-22 and F-35 for the first time will help our industry partners take the next leap,” Roper said. The intent is to move much faster than before to conceive, build and test new technologies and strategies despite complexity or technical challenges.

An equally important goal is to demonstrate the real world value of the hard-to-describe effort in tangible, understandable ways. JADC2, previously named multi-domain operations command and control, relies on ABMS to develop software and algorithms so that artificial intelligence and machine learning can compute and connect vast amounts of data from sensors and other sources at a speed and accuracy far beyond what is currently attainable. ABMS also includes hardware updates including radios, antenna and more robust networks that enable unimpeded data flow to operators. Aside from tools and tech, JADC2 also demands a cultural change among service men and women that embraces and responds to multi-faceted battlespaces driven by information shared across the joint force.

The critical difference going forward is to create a failsafe system that gets—and shares—real-time information across multiple spaces and platforms simultaneously, that removes barriers that keep information from personnel and units that need it. For example, once in place, the new command and control ability will allow F-16 and F-35 pilots to see the same information at the same time in the same way along with a submarine commander, a space officer controlling satellites and an Army Special Forces unit on the ground.

IBCS Simultaneously Intercepts Multiple Threats During Flight Test

Ihe U.S. Army and Northrop Grumman Corp. (NGC) recently conducted simultaneous engagement of two incoming target cruise missiles during a flight test using the Army's Integrated Air and Missile Defense (IAMD) Battle Command System (IBCS). Including Sentinel, Patriot and Marine TPS-59 radars and Patriot Advanced Capability-2 (PAC-2) Guidance Enhanced Missile-TBM (GEM-T) interceptors, the test demonstrated successful interoperability and the

For More
Information

Visit mwjournal.com for more defense news.

end-to-end performance of the IBCS system to detect, track and simultaneously engage multiple threats.

The test was conducted at White Sands Missile Range, N.M. by a test detachment of soldiers from the 30th Brigade 3rd Battalion 6th Air Defense Artillery Regiment who manned the workstations and executed the engagement plan presented by IBCS. The friendly forces defense laydown consisted of a battalion, two battery IBCS engagement operations centers, a Patriot radar, two Sentinel radars and two PAC-2 launchers. Also contributing to the test were a U.S. Marine Corps AN/TPS-59 joint radar connected to an external Link 16 network and F-35 fighter aircraft with sensors adapted to IBCS. All these systems were connected to the IBCS Integrated Fire Control Network (IFCN).


Designed to emulate potential real world events, the flight test began when two cruise missile surrogate threats were launched. The cruise missiles flew in a maneuvering formation until they neared their targets, and then split off to attack two separate defended assets. IBCS fused data from the various participating sensors and external networks into accurate composite tracks of both threats. Then it developed the engagement plan employed by the soldiers to successfully launch two PAC-2 missiles and intercept both cruise missile targets.

"Today's successful flight test further demonstrates the maturity of the IBCS and its capabilities in sup-

port of multi-domain operations," said Maj. Gen. Rob Rasch, Army Program executive officer, Missiles and Space. "The inclusion of Marine Corps and Air Force sensor systems in the test architecture validate the system's open architecture and the potential for IBCS to operate seamlessly with joint services, as well as foreign partners in the future, to extend battlespace and defeat complex threats."

"IBCS is the Army's #1 air and missile defense priority and will fundamentally change our air and missile defense force and capability, maximizing the combination of sensors and shooters in a completely different way than ever before," said Brig. Gen. Brian Gibson, Army Futures Command and director of the Air and Missile Defense Cross Functional Team. "Successful execution of this mission-critical test validates that IBCS is well prepared for the upcoming limited user test in Q2 2020."

IBCS is the cornerstone of the Army's IAMD modernization program. Designed to connect the force for unified action against evolving threats, IBCS is a net-centric command and control system for the air and missile defense mission. IBCS enhances battlefield survivability by creating a resilient self-healing network of all available sensors that can reduce and eliminate vectors of attack while providing operators with a single integrated air picture of unprecedented accuracy and expanded area of protection.

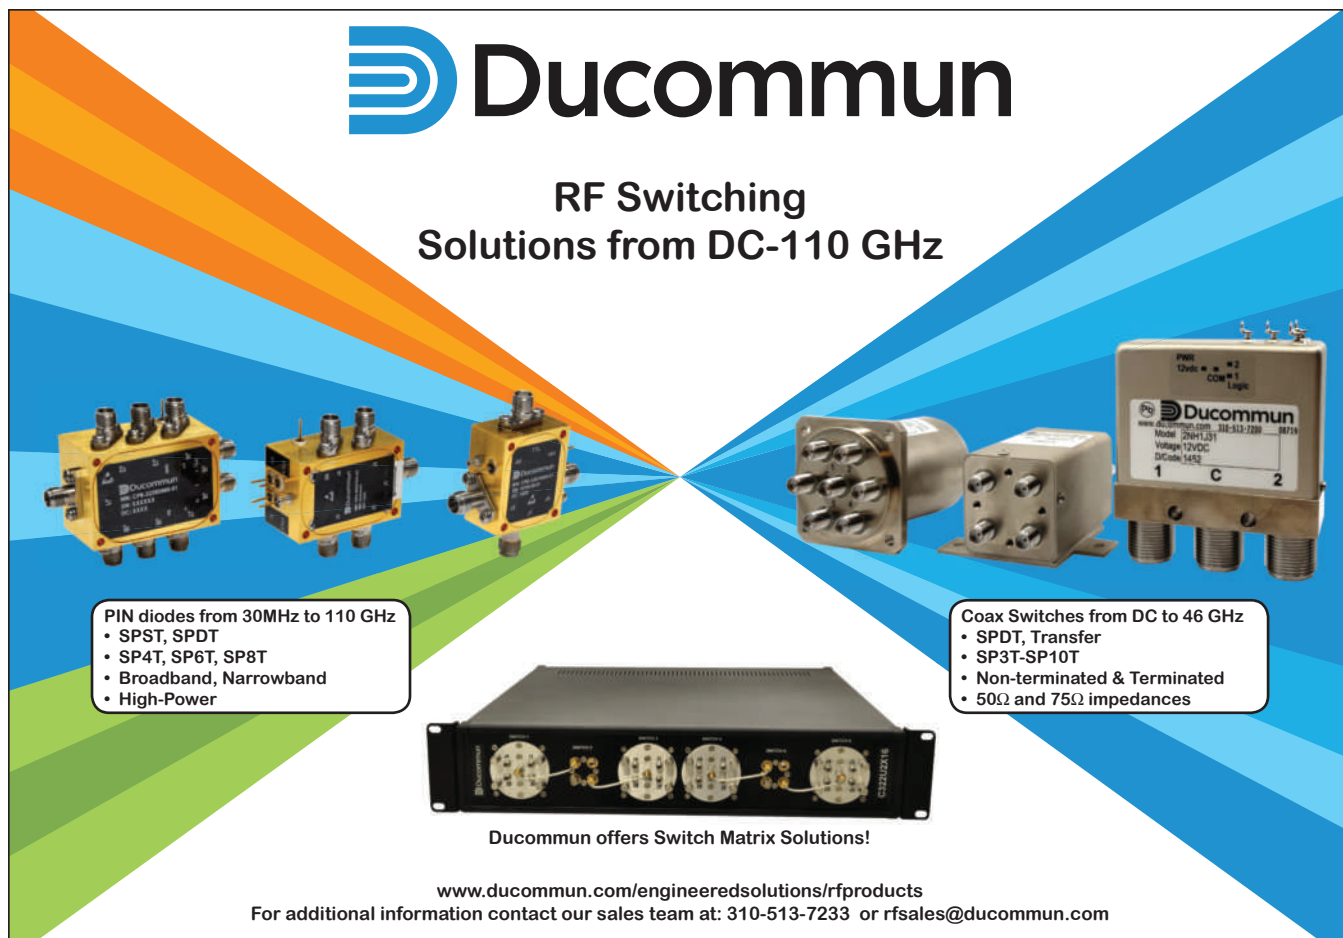

Ducommun

RF Switching Solutions from DC-110 GHz

PIN diodes from 30MHz to 110 GHz

- SPST, SPDT
- SP4T, SP6T, SP8T
- Broadband, Narrowband
- High-Power

Coax Switches from DC to 46 GHz

- SPDT, Transfer
- SP3T-SP10T
- Non-terminated & Terminated
- 50Ω and 75Ω impedances

Ducommun offers Switch Matrix Solutions!

www.ducommun.com/engineeredolutions/rfproducts
For additional information contact our sales team at: 310-513-7233 or rfsales@ducommun.com


Reactel, Incorporated

Reacting First to All Your Filter Needs.




*When Being the First to React
Makes all the Difference in the World*


- **RF & Microwave Filters**

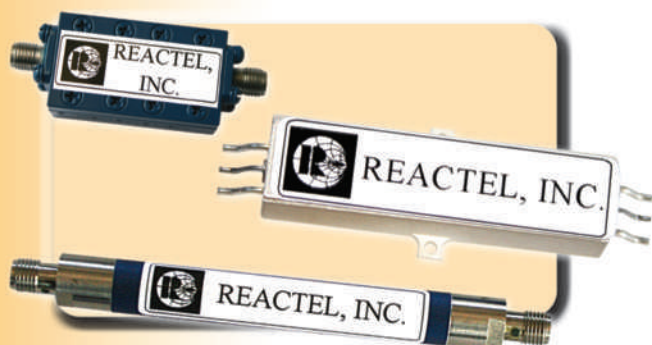

- **Diplexers & Multiplexers**

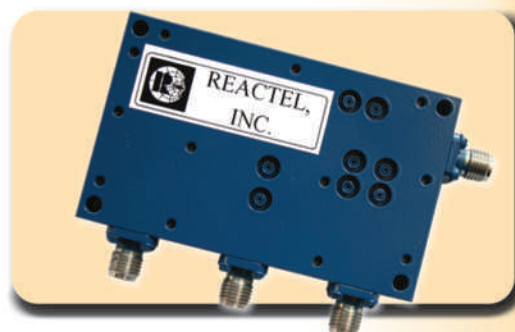

- **Multifunction Assemblies**

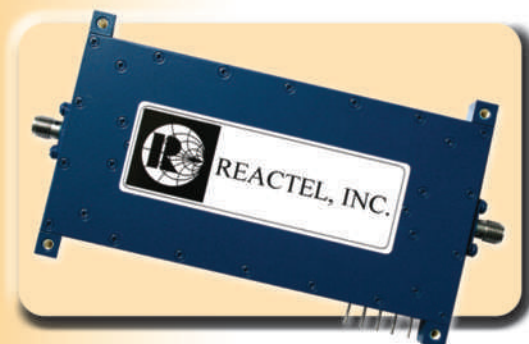

- **Ceramic Filters**



Reactel, Incorporated is your source for RF & Microwave Filters, Multiplexers and Multifunction Assemblies covering DC - 50 GHz.

Trust in Reactel's highly skilled engineers and technicians to quickly develop and produce the most reliable products for your filter requirements.

8031 Cessna Avenue • Gaithersburg, Maryland 20879 • Phone: (301) 519-3660
For general inquiries, please email reactel@reactel.com • <http://twitter.com/reacteljim>
Go online to www.reactel.com to download your Reactel catalog today.




@reacteljim

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.
For reprints please contact the Publisher.

MMIC SPLITTER/COMBINERS

up to **43.5 GHz**

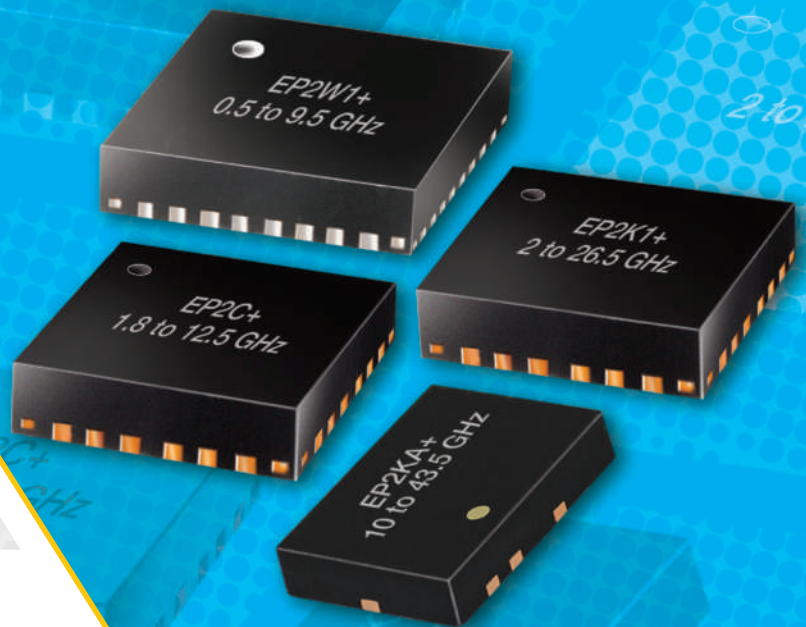

THE WIDEST SURFACE MOUNT BANDWIDTHS IN THE INDUSTRY!

- ▶ Power handling up to 2.5W
- ▶ Insertion loss, 1.1 dB typ.
- ▶ Isolation, 20 dB





2020 Will See Cities Develop Advanced Urban Strategies

Already in 2019, cities had developed deeper insights into high-priority challenges and approaches to address those. According to ABI Research, many have started to develop a narrative centered around five holistic focus areas: digital twins and urban modeling, resilience, circularity, electric micro-mobility and micro-transit and smart urban spaces. "In 2020, these concepts will be integrated into a comprehensive urban agenda and strategy, defining the character of smart cities of the future. But they also help address short-term challenges. The adoption of micro-mobility in the form of electric bike, scooter and motorcycle sharing significantly reduces both air pollution and traffic congestion, arguably the two biggest issues cities are grappling with today," says Dominique Bonte, Smart Cities & Smart Spaces VP.

This represents a short-term solution awaiting widespread adoption of electric driverless vehicle sharing by 2030. It does, however, prompt city governments to reorganize public space to accommodate these new smart mobility modes. The wider safety and sustainability questions are starting to be approached in a more structural and fundamental way, respectively focused on resilience (readiness and responsiveness) and an approach based on circular economy concepts (resource self-sufficiency and recycling maximization). "Finally, the digital twin and wider urban modeling concepts will provide a fertile environment for the mass adoption of basic IoT connectivity technologies, informing and enhancing static 3D models to become real-time replicas of the cities' physical assets, in turn, enabling further efficiency and resource utilization improvements, scenario analysis, generative design and preventive and real-time maintenance," Bonte adds.

"Translating these high-level paradigms into practical technology implementations, however, will continue to elude all but the most advanced cities, such as Singapore and Dubai. Issues include technology life cycle uncertainty—if or when to adopt new technologies like 5G, LPWA, AI, blockchain and driverless mobility—anticipating upgrade cycles, repurposing systems across multiple verticals and use cases and learning how to efficiently implement open IoT platforms," Bonte explains.

At the same time, the wider ecosystem dynamics toward which smart cities and the overall government technology sector are gravitating are increasingly defined by technology marketplaces (Geotab), open data sharing platforms (Transport for London, HERE's Open Location Platform), vendor accelerator programs (Qualcomm), public-private partnerships (SharedStreets), sharing economy leverage and a long tail of smart city technology startups and system integrators. This rep-

resents a major challenge for cities in terms of aligning internal organizational structures to enable efficient participation in this new market constellation.

Against a background of a continuing challenging economic climate, cities will put more emphasis on ROI or, at the very least, will want to optimize where their investments are going. This will require vendors to provide detailed information on what their solutions can achieve in terms of cost savings and tangible benefits for citizens and enterprises alike through both general awareness building and quantitative tools. More concretely, vendors will have to tailor their business models toward CAPEX-free "as-a-Service" offers, while at the same time providing financing support, either directly through their own financing or venture capital divisions or indirectly, helping discover new funding mechanisms and opportunities.

2020: The Year of Cooperative Mobility

Driving is a multi-agent problem, with many of today's accidents and inefficiencies due to poor communication and coordination between the various road users. The year 2020 will see the advent of more cooperative forms of mobility, with 107 million connected cars on the road starting to share data messages about road and traffic conditions to allow other connected vehicles to anticipate hazards and improve traffic flow," says Maite Bezerra, Smart Mobility & Automotive analyst.

The first phase will take the form of low-bandwidth, high-latency communication via the LTE network between connected cars and data ingestion platforms to enable applications like ice and oil hazard warnings and lane-level traffic assistance.

It will also see the first large-scale deployment of 802.11p V2X technology on the Volkswagen Golf in Europe, a model that typically ships in volumes of 450,000+ every year. This will enable low-bandwidth and low-latency broadcast communications between a growing number of connected cars to enable safety-critical collision avoidance.

"At one point, 2020 seemed a distant target, a long-term horizon over which the technology trends that have dominated the automotive scene for the last 10 years—electrification, connectivity, autonomous driving—would all have harmonized to deliver safer, more efficient transportation for all. It's not going to happen in 2020, or much before 2025," according to James Hodgson, Smart Mobility & Automotive principal analyst.

The world goes into 2020 with road accident casualties increasing, OEM spending on autonomous technologies contracting, connectivity enabling the same legacy infotainment applications and ride-hailing operations facing serious questions over profitability. The overall Connected, Autonomous, Shared and Electric

CommercialMarket

(CASE) vision remains compelling, and most OEMs are targeting 2025 or 2030 for the transition to connected, autonomous and electrified mobility.

GSA Identifies 23 Countries Setting the Pace for 5G C-Band Spectrum Auctions

The Global mobile Suppliers Association (GSA) identified 23 countries that have auctioned or allocated C-Band spectrum for mobile broadband. C-Band refers to spectrum in the 3300 to 4200 MHz frequency range offering an optimal balance between coverage and capacity. 5G applications suited to C-Band spectrum support include AR/VR, ultra-high definition (UHD) video, smart home, smart manufacturing, health care and drones. The 3300 to 4200 MHz band will also provide both mobile connectivity "on the go" and FWA for domestic and business applications.

The prices paid for the C-Band spectrum have varied widely, with the amount operators are prepared to spend in each market being influenced by factors such as competition, spectrum licensing terms, existing spectrum holdings and the amount spent by mobile customers in the country concerned.

The first 23 countries to auction or allocate C-Band spectrum for 5G include Australia, Austria, Czechia, Finland, Germany, Hong Kong, Hungary, Ireland, Italy, Latvia, Norway, Romania, Slovakia, South Korea, Spain and the U.K.

"C-Band spectrum has historically been made available around the world for fixed wireless services using legacy technologies, or has been allocated for satellite or government/military use," commented Joe Barrett, president, GSA. "While a few countries have made portions of C-Band spectrum available for LTE, with the advent of 5G, access to C-Band spectrum is being opened up to support mobile broadband services, often specifically including 5G."

The GSA 5G Spectrum Auction Tracker is a new information database and is available to all GSA members. Coming in Q1 2020, it will be integrated into the GSA Analyser for Mobile Broadband Devices (GAMBoD) database, which is a unique search and analysis tool to enable searches of LTE and 5G devices and new global data on Mobile Broadband Networks, Technologies and Spectrum (NTS). The new 5G Spectrum Auction Tracker database contains details about spectrum auction and allocation trends, including data about the prices of spectrum sold at auction or allocated to operators through administrative proceedings.


PHASE COHERENT

HSX
SERIES
SIGNAL GENERATORS





OPTIMAL PERFORMANCE & SIGNAL STABILITY

- ▶ 1GHz Phase Noise: -142dBc/Hz (10kHz offset)
- ▶ 10MHz to 3, 6, 12, 20, and 40GHz (1mHz resolution)
- ▶ Spurious Response: $< -80\text{dBc}$
- ▶ Dynamic Range: $+20\text{dBm}$ to -110dBm
- ▶ Channel-Channel Isolation: $< -110\text{dB}$
- ▶ Up to 4x Independent, PHASE COHERENT Channels

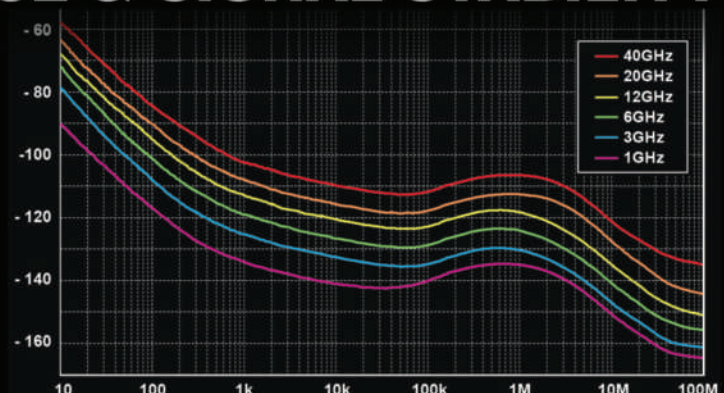

DON'T LET OUT OF BAND INTERFERENCE JEOPARDIZE YOUR PERFORMANCE

Exceed Microwave Waveguide
Filters achieve very low
insertion loss and
eliminate noise.

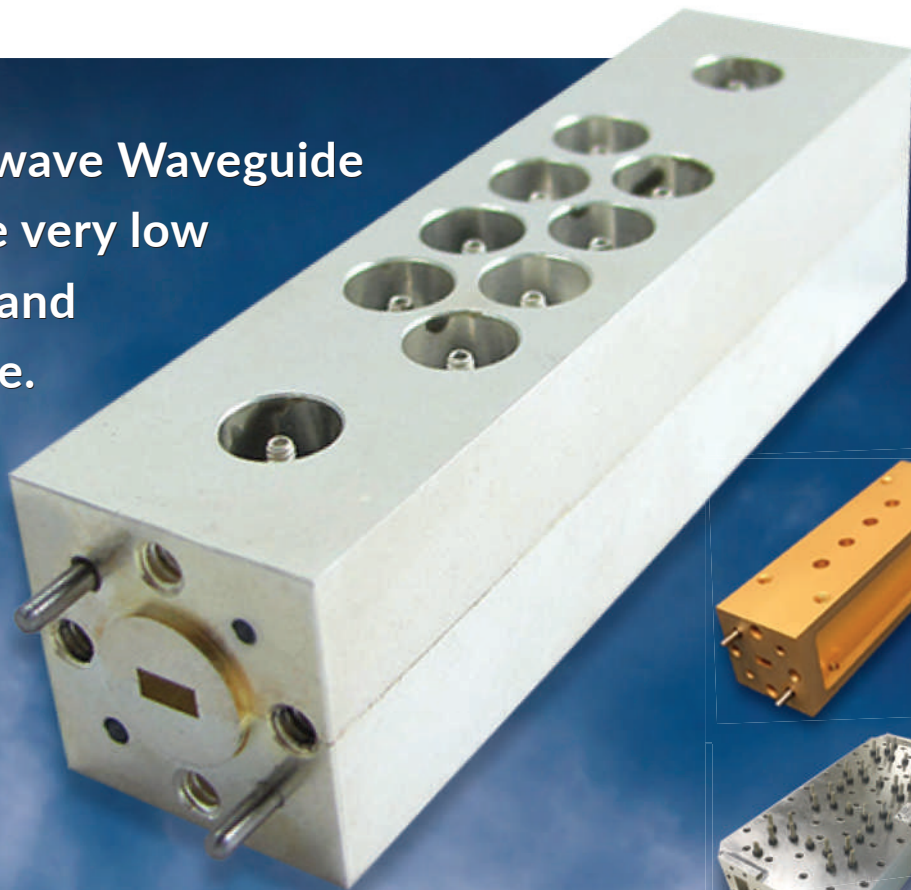

High-Quality • High Performance

Waveguide High Pass, Low Pass, Band Stop and Band Pass Filters.
...and more available at hasco-inc.com.

ITEMS IN STOCK • READY TO SHIP • ORDER TODAY!



Phone +1 (424) 558-8341
sales@exceedmicrowave.com
www.exceedmicrowave.com



HASCO Components

Phone +1 (888) 498-3242
sales@hasco-inc.com
www.hasco-inc.com



Content is copyright protected and provided for personal use only - not for reproduction or transmission
For reprints please contact the Publisher.



Around the Circuit

Barbara Walsh, Multimedia Staff Editor

IN MEMORIAM



▲ Mojgan Daneshmand

Mojgan Daneshmand and **Pedram Mousavi**, professors at the University of Alberta, along with their daughters Daria and Dorina, were among those killed when a Ukrainian passenger jet crashed early on Wednesday, January 8. All 167 passengers and nine crew members were killed when the plane, which was destined for Kyiv, crashed shortly after takeoff from Tehran. Daneshmand and Mousavi were award-winning professors who worked in wireless communication technology. The pair were travelling home with their two daughters Daria, 14, and Dorina, 9. Daneshmand was an electrical engineering professor and Canada Research Chair holder, and won a prestigious international award for her exceptional research and for establishing herself as a role model in engineering from the IEEE in 2016. She held the Canada Research Chair in Radio Frequency Microsystems for Communication and Sensing and won the IEEE Lot Shafai Mid-Career Distinguished Achievement Award. The honor recognizes her pioneering contribution to microwave and mmWave technologies and being a role model for women in engineering. Daneshmand and her colleagues in the Department of Electrical and Computer Engineering were first to establish modern microwave characterization labs at the University of Alberta.

MERGERS & ACQUISITIONS

Altair has acquired **newFASANT**, a software company based in Spain. newFASANT's products address a range of electromagnetic problems, supporting antenna design and placement, radar cross section analysis, automotive applications (V2V and ADAS) and infrared/thermal signatures. Originally a spin-off from the University of Alcalá, near Madrid, newFASANT's portfolio contains full-wave and high frequency asymptotic electromagnetic solvers. Combining newFASANT's portfolio with Altair Feko™ will strengthen Altair's competitive position and the solutions it offers for IoT, cellular networks, mobile phones and other connected devices, V2V and radar.

Abracon has announced the successful acquisition of **ILSI America**, a privately held market leader of frequency control devices, and its subsidiaries. Abracon will continue supporting ILSI America and its ILSI, MMD,

Ecliptek and Oscilent brands for new and existing customers. The ILSI America product portfolio complements Abracon's existing product offerings and provides Abracon's global customer base with a broader range of solutions.

COLLABORATIONS

Keysight Technologies Inc. announced an extended collaboration with **AAC Technologies (AAC)** to accelerate validation of new antenna designs for 5G new radio (NR) devices. Keysight's 5G solutions help accelerate the market introduction of high performance 5G products in nearly any form factor. AAC, a provider of solutions found in smartphones and portable electronic devices across the world, cooperates closely with partners to create differentiated and innovative products in both global and localized markets.

Septentrio has collaborated with **Analog Devices Inc. (ADI)** to provide customers with easy access to optimized integrated GNSS inertial solutions. The two companies are combining ADI's high-quality Inertial Measurement Units (IMU) with Septentrio's multi-frequency, multi-constellation GNSS receivers. The resulting high performance GNSS/INS systems deliver centimeter-level accurate positioning together with 3D orientation (heading, pitch and roll), ideal for applications such as automotive ADAS and industrial automation. Septentrio's GNSS technology provides a unique combination of accuracy and robustness which is aligned well with the capabilities of ADI's sensors.

Plastimo and **Sigfox** have joined to provide total geo-location search and rescue capability across all oceans, beginning in 2020. The new service will be supported by data from the ELO nanosatellite constellation operated by Eutelsat, Sigfox's partner. The first two nanosatellites will be operational in 2020. Plastimo, with more than 50 years expertise designing and manufacturing safety equipment for the boating market, was seeking an innovative solution to quickly and reliably locate seafarers in the ocean. It turned to Sigfox's 0G network to improve and broaden the application of the digital technologies integrated into its safety equipment.

Oculii and **Infineon** have collaborated on radar software solutions that scale performance for cost-effective single-chip solutions tailored for Level 1 ADAS, all the way to multi-chip high performance solutions for Level 4 Autonomous Driving. Oculii's patented Virtual Aperture Imaging Software Technology significantly increases the angular resolution of a radar phased array—dramatically improving the safety, reliability and efficiency of autonomous vehicles in a cost-effective way. This partnership will enable automotive OEMs and Tier-1 customers to leverage Infineon's best in class chipset containing AURIX™ MCUs, MMIC and power supply hardware platform along with Oculii's Virtual Aperture Imaging software to deliver high-resolution performance at an attractive price point.

For More
Information

For up-to-date news briefs, visit mwjournal.com

DUAL or SINGLE LOOP SYNTHESIZER & PLO MODULES

Features:



- Proprietary digital Integer and Fractional PLL technology
- Lowest digital noise floor available -237 dBc/Hz figure of merit
- Output frequencies from 100 MHz locked crystal to 30 GHz
- Available with reference clean up dual loop, or single loop for very low noise reference
- Parallel fixed band stepping or SPI interface synthesized up to octave bandwidths
- Reference input range 1 MHz to 1.5 GHz
- Dual RF output or reference sample output available
- +12 dBm standard output power +16 dBm available
- Standard module size 2.25 X 2.25 X 0.5 Inches (LxWxH)
- Standard operating temperature -10 to 60 °C, -40 to +85 °C available

Up to
30 GHz*

Applications:

- SATCOM, RADAR, MICROWAVE RADIO

* 16 - 30 GHz with added x2 module < 1" in height.

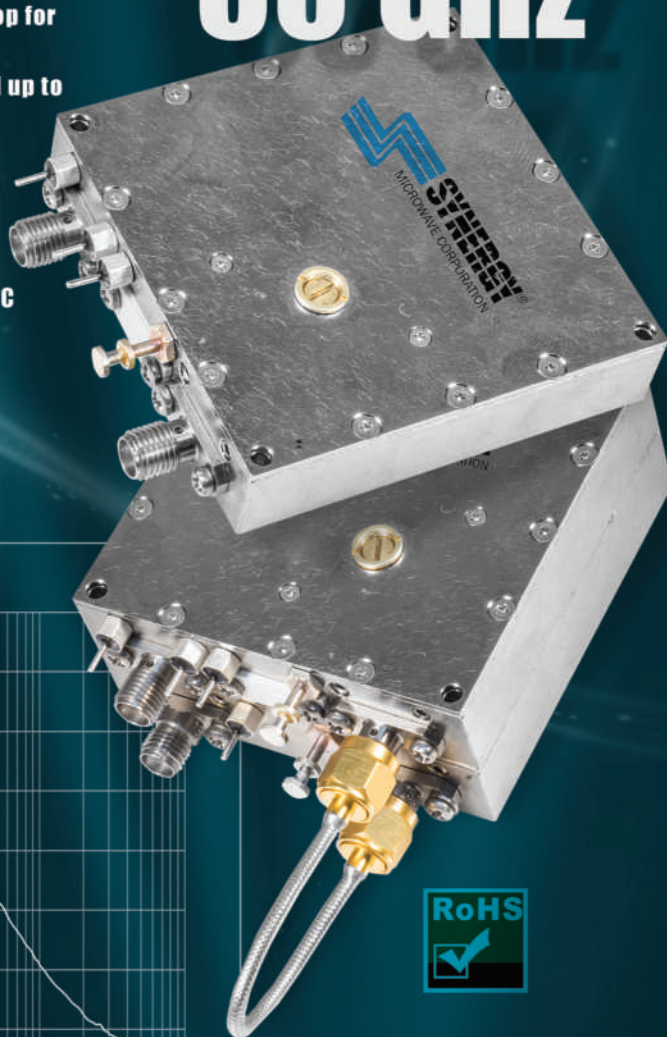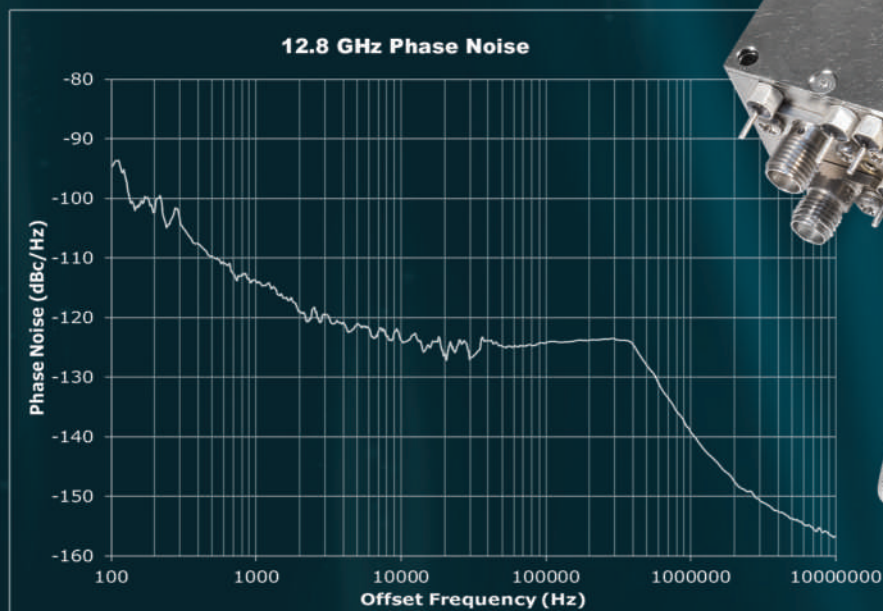

Talk To Us About Your Custom Requirements.



Phone: (973) 881-8800 | Fax: (973) 881-8361
E-mail: sales@synergymwave.com
Web: WWW.SYNERGYMWAVE.COM
Mail: 201 McLean Boulevard, Paterson, NJ 07504

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.
For reprints please contact the Publisher.

Around the Circuit

Amazon, Apple, Google and the **Zigbee Alliance** have announced a new working group that plans to develop and promote the adoption of a new, royalty-free connectivity standard to increase compatibility among smart home products, with security as a fundamental design tenet. Zigbee Alliance board member companies such as IKEA, Legrand, NXP Semiconductors, Resideo, Samsung SmartThings, Schneider Electric, Signify (formerly Philips Lighting), Silicon Labs, Somfy and Wulian are also on board to join the working group and contribute to the project. The goal of the Connected Home over IP project is to simplify development for manufacturers and increase compatibility for consumers.

ACHIEVEMENTS

Qualcomm Technologies Inc., a subsidiary of Qualcomm Inc., and **ZTE Corp.** together achieved a 5G-enabled Voice over New Radio (VoNR) call. The call was performed in compliance with 3GPP Release 15 specifications over the 2.5 GHz spectrum band (n41) by utilizing a ZTE's 5G NR base station and a 5G smartphone form factor test device powered by a Qualcomm® Snapdragon™ 5G Modem-RF System. Voice services are a fundamental offering for mobile operators, and when performed using a 5G network, it is called VoNR.

The first laparoscopy to be performed in Russia with the use of 5G technology was recently undertaken in the 5G pilot zone located in Skolkovo. Telecommunications company **Beeline**, with **Huawei** and **GMS Hospital** partnered together to complete two such surgical procedures. The 5G pilot zone was rolled out in the operational block of the innovation center at Skolkovo, with the support of the Moscow Department of Information Technologies. Thanks to the work of all those involved, a cancer tumor was successfully removed with the use of a laparoscope and 4K camera connected to the 5G network, an anesthesiology console, several additional cameras and the Huawei 5G multimedia white board.

Advantech Wireless Technologies Inc. has received over \$2 million in orders of its Engage™ Class 1.2 and 2.4 m FlyAway SATCOM Terminal from a NATO member country. The Engage™ Class Flyaway Terminal Solution includes the most advanced SATCOM technology. This flexible and transportable satellite terminal is a fully integrated tri-band system designed for strategic applications, easy deployment and operation under harsh environmental conditions. The terminal is based on high efficiency, ruggedized tri-band ready 1.2 and 2.4 m Flyaway Antennas which can cover X-, Ku- or Ka-Band by replacing the feed only. The antenna is fully motorized with an integrated satellite finding controller.

CONTRACTS

The **U.S. Air Force** has awarded the Common Computing Environment (Cloud One) contract to **Science Appli-**


WAYFARER™ SERIES

Norsat's WAYFARER series includes rugged, ultra-portable commercial fly-away satellite terminals, easy-to-deploy commercial drive-away antenna systems and fixed terminal solutions. Products in this series are ideal for a variety of commercial applications including broadcast, oil and gas, mining, forestry, emergency response and remote enterprises.

- Fast deployment
- Easy-to-use
- Manual or Auto-acquire Models

For more information, visit www.norsat.com/wayfarer-series/

Norsat
International Inc.

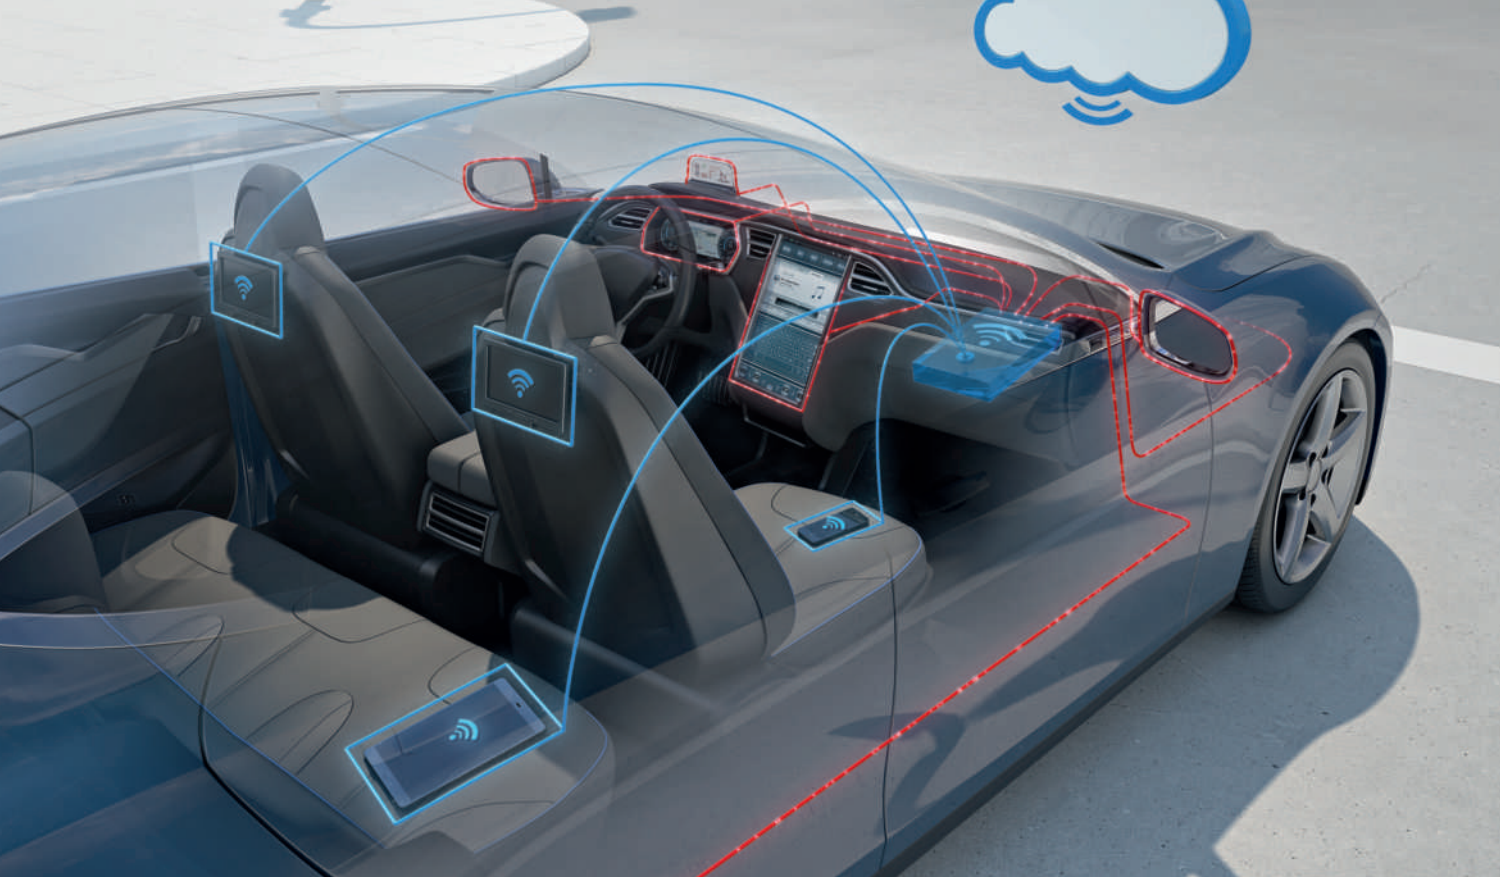

AUTOMOTIVE

Automotive Connectors

Rosenberger develops and manufactures innovative connector systems which fulfill the tough requirements in modern vehicles – today and even in future.

FAKRA- or high-speed-FAKRA-mini-connectors, high-power- or high-speed data connectors, high-voltage or magnetic connectors – Rosenberger provides automotive connectivity

systems in the highest quality and best performance for a variety of applications:

- Driver assistance systems
- Autonomous driving
- Navigation and telematics
- Infotainment and fond entertainment
- Internet and mobile communication
- Battery charging and power transmission in electric and hybrid vehicles

www.rosenberger.com

Rosenberger

Around the Circuit

cations International Corp. (SAIC). The \$727 million contract is for application modernization for the DoD. SAIC will migrate approximately 800 Air Force and U.S. Army mission applications into the cloud. The contract consists of firm fixed price, labor hour and cost reimbursement elements with a nine-month period of performance and four one-year options. Though awarded by the Air Force, the contract will also serve Army applications, as part of the Army's cloud strategic framework. SAIC's solution leverages proven success and capabilities in cloud, IT modernization, software, cyber and data analytics.

Raytheon will build two additional shipsets of SPY-6 radars under a \$250 million contract for the **U.S. Navy**. The SPY-6 is a family of next-generation, integrated air and missile defense radars that scale to meet mission requirements of any ship. The company is now contracted to deliver a total of nine radar shipsets to DDG-51 Flight III destroyers. SPY-6 delivers significantly enhanced range and sensitivity (compared to legacy sensors), and gives geographically dispersed ships the ability to share and act on sensor data in ways never before possible. This radar gives the Navy unprecedented operational flexibility to defend against ballistic and cruise missiles as well as advanced surface and air threats.

BAE Systems has received a \$175 million contract from the **U.S. Navy** to modernize the guided-missile cruiser

USS Vicksburg (CG 69). The Vicksburg will undergo approximately 18 months of work at the company's shipyard in Norfolk, Va., the ship's homeport. The modernization period (MODPRD) contract includes options that, if exercised, would bring the cumulative value to \$175.1 million. BAE Systems initiated the first phase of Vicksburg's modernization program in May 2017.

Comtech Telecommunications Corp. announced that during its second quarter of fiscal 2020, its Orlando-based subsidiary, **Comtech Systems Inc.**, which is part of Comtech's Government Solutions segment, was awarded a 10-year, \$211 million IDIQ contract by the Cubic Mission Solutions business division of **Cubic Corp.** to provide next-generation troposcatter systems in support of the U.S. Marine Corps. In connection with this contract award, Comtech received an initial \$13.4 million order to supply next-generation terminals to Cubic. Delivery of the first units will support test and evaluation for the U.S. Marine Corps.

L3Harris Technologies has received a \$50 million follow-on delivery order for Falcon III AN/PRC-160 HF radios and related equipment from the **U.S. Marine Corps** as part of its High Frequency Radio II modernization program. The order is part of the Navy Portable Radio Program five-year IDIQ contract received in 2017. The Marine Corps selected the AN/PRC-160 to replace legacy L3Harris HF radios. The AN/PRC-160 is a modern solution for beyond-line-of-sight communications in

COST-EFFECTIVE HERMETIC MICRO D CONNECTORS

Standard 9 to 51 pin configurations available
or let us design to your custom requirements



SPECIAL HERMETIC PRODUCTS, INC.

Hi-Rel By Design


CONTACT US TODAY

(P) 603-654-2002 (F) 603-654-2533

www.shp-seals.com email: sales@shp-seals.com

CERTIFIED ISO 9001:2008

Up/Down Converters for Simpler mmW System Designs

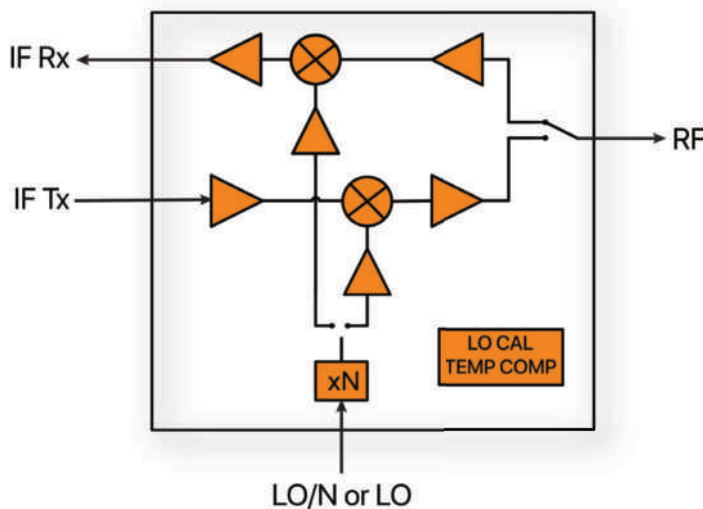


Reduce Board Part Count and Enable Smart Features

- Up and down converter in single IC
- Up to 6 GHz IF
- Integrated T/R switch
- Internal LO calibration
- Auto temperature compensation
- CMOS technology

mmW Frequency Converter IC Family

Part Number	Frequency	Description
AWMF-0170	24.25 - 27.5 GHz	Tx/Rx Up and Down Converter IFIC
AWMF-0153	26.5 - 29.5 GHz	Tx/Rx Up and Down Converter IFIC
AWMF-0161	37 - 40 GHz	Tx/Rx Up and Down Converter IFIC



mmW
Silicon ICs

Intelligent Array
IC Solutions

mmW Algorithms
to Antennas

Around the Circuit

a satellite-denied environment. It is the smallest, lightest and fastest wideband HF manpack available—providing 10× throughput over legacy systems.

Elbit Systems Ltd. announced that it was awarded an initial contract from the **Production and Procurement Directorate of the Israeli Ministry of Defense (IMOD)** valued at approximately \$31 million (NIS 109 million), to provide Iron Fist Active Protection Systems (APS) for the Eitan Armored Fighting Vehicles (AFV) of the Israeli Defense Forces (IDF). The contract will be performed over a five-year period. Under the contract Elbit Systems will equip the IDF's new wheeled AFVs with the Iron Fist Light Decoupled (IFLD) systems. The Iron Fist system uses optical sensors, tracking radar, launchers and countermeasure munitions to defeat threats at a safe distance.

Kratos Defense & Security Solutions Inc. announced that it has received an approximate \$24 million single award contract for microwave electronics products in support of missile system programs. This contract award is the initial production award for what is expected to be long term, multi-year missile system platforms. Kratos is a leading provider of microwave electronic products in support of missile, radar, guided munitions, EW, communication and other programs and systems.

Robotic Research LLC announced receipt of a \$16.5 million order for its warfighter localization sensor units, also known as WarLoc®, for the **U.S. Army Product Manager Sets, Kits Outfits and Tools (PM SKOT)** to support forward-deployed U.S. military personnel. Robotic Research will deliver WarLoc units to equip four deployed U.S. Army Brigade Combat Teams in various locations. The first batch of systems has already been shipped. WarLoc provides superior localization and positioning data for teams of warfighters or first responders in GPS-denied environments, including underground facilities and inside buildings and mega-cities.

PEOPLE



▲ Jim Cable

pSemi Corp., a Murata co., has announced the retirement of former CEO and esteemed executive **Jim Cable**. After more than 20 years with the company, Cable has retired from his position as chairman and CTO of pSemi and as a global semiconductor R&D director for parent company Murata Manufacturing. Cable joined pSemi (formerly Peregrine Semiconductor) in October 1996 and held positions as COO and VP of technology and engineering before becoming CEO in 2002. From 2002 to 2017, he served as CEO, leading the team through explosive growth,

emv

International Exhibition and Conference
on Electromagnetic Compatibility

Cologne, 17 – 19 March 2020

Get a unique market overview and new impulses for your daily work: Exchange with experts at the European meeting point for electromagnetic compatibility.

Discover more: e-emc.com



mesago
Messe Frankfurt Group



HYPERLABS

Innovation at Hyperspeed since 1992

Ultra-Broadband Components

Designed and manufactured in the USA to meet the demands of all of your test and measurement applications.

Custom solutions available.



Broadband RF Baluns

500 kHz to 67+ GHz (-3 dB) bandwidth

Industry-best amplitude and phase matching
SMA, 2.92 mm, 2.4 mm, or 1.85 mm connectors

Resistive Power Dividers

DC to 67+ GHz bandwidth

Excellent amplitude and phase symmetry

SMA, 2.92 mm, 2.4 mm, or 1.85 mm connectors



Broadband Pick-Off Tees

DC to 67+ GHz thru (-3 dB) bandwidth

Available in matched pairs (± 0.1 dB typical)

SMA, 2.92 mm, 2.4 mm, or 1.85 mm connectors

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.

For reprints please contact the Publisher.



IEEE Wireless and Microwave Technology Conference

WAMICON 2020

Marriott Suites on Sand Key

Clearwater Beach, Florida

April 15-17, 2020

JOIN US

WAMICON 2020 will be held in Clearwater Beach, Florida on April 15-17, 2020. The conference addresses interdisciplinary aspects of wireless and RF technology.

CONFERENCE HIGHLIGHTS

- **Technical Program Focus:**

Wireless Devices and Systems Making Mad Connections from Space to the 5G IoT

- **Sub-Themes:**

- * Wireless Applications in Space
- * Wireless & Microwave IoT
- * Strengthen Connections & Build Collaborations

REGISTRATION

- **Registration is Open!**

- * Register Now at www.wamicon.org

NEW in 2020!

- **Collaboration Camp:**

- * Bring Your Concept in Need of Funding
- * Speed Network - Formulate Your Team
- * Pitch Competition - Pitch Your Concept to Program Managers, R&D Institutions & Government Agencies
- * Bonus - NASA SBIR Overview

- **Get Social with WAMICON:**

- * Check Social Media for Updates & Giveaways!



www.wamicon.org

Exhibit/Sponsor Opportunities Available!

Email: jassurian@reactel.com

llevessque@ieee.org

dzavac@tte.com

Around the Circuit

funding rounds, an IPO and the 2014 acquisition by Murata.

REP APPOINTMENTS

Modelithics has appointed the **Nearson Marketing Group** to support and sell its Modelithics' high frequency simulation model libraries and precision RF, microwave and mmWave measurement and modeling services in Taiwan. Nearson Marketing Group is an electromagnetic simulation technology consulting company based in Taiwan with customers across various industries as well as academia. The addition of Nearson Marketing Group as a new Modelithics sales representative provides Modelithics customers and potential customers in Taiwan with a local contact for information regarding Modelithics' products and capabilities. In addition, Nearson Marketing Group will now be able to support its customers with RF and microwave simulation models and measurement services, complementing the company's line of electromagnetic simulation tools and related products.

Richardson RFPD, an Arrow Electronics co., announced that it has entered into a global franchise agreement with **ERZIA Technologies S.L.** Headquartered in Santander, Spain, ERZIA is a leading specialist in the design and manufacture of solid-state amplifiers using the latest technologies available to provide rugged and high-reliability solutions for a range of applications, including communications, test & measurement, radar and EW. The agreement covers ERZIA's commercial off-the-shelf products, including high-power/driver amplifier (HPA) modules and low noise amplifier (LNA) modules. ERZIA's broad product offering covers DC to 100 GHz, with connectorized and wave guide interfaces. All of ERZIA's COTS products are ITAR-free designs and offer a high degree of customization.

PLACES

Smiths Interconnect has opened a qualification and test laboratory at its site in Dundee, Scotland. The lab will provide complete qualification testing for Smiths Interconnect products in Europe. The Dundee facility can replicate deep space vacuum and heat with high-power amplifiers and vacuum systems. This capability supports analyzing high-power devices planned for space applications, such as device breakdown voltage behavior in a vacuum or near-vacuum environment. This effect, called multipaction, can render a device useless and degrade the reliability of a satellite.

PROVEN RELIABILITY. TRUSTED PERFORMANCE.

Thick & Thin Film Resistor Products

- Faithful scheduled deliveries under 2 weeks
- Values from 0.1 Ohm to 100G Ohm
- Abs. tolerance to $\pm 0.005\%$, matching to $\pm 0.0025\%$
- TCR's to $\pm 2\text{ppm}/^\circ\text{C}$, tracking to $\pm 1\text{ppm}/^\circ\text{C}$
- Operating frequencies to 40GHz
- High performance at cryogenic temperatures
- Case sizes to 0101
- Space level QPL's, F.R.-"S", per MIL-PRF-55342
- Zero failures with over 200 million life test hours
- ISO 9001:2000 certified
- Full line of RoHS compliant products
- 24-hour quote turnaround

Electronic Package Products

- Hi Reliability Hermetic Packages:
 - Lightweight glass sidewall flatpacks, S0-8, and S0-14 packages
 - Surface mount and plug-in packages
 - Metal flatpacks, leadless chip carriers (LCC), ceramic quad flatpacks (CQFP)
- Hermeticity per MIL-STD-883, Method 1014, Condition A4 (less than 10^{-10} atm cc/sec)
- Plating per MIL-DTL-45204 and QQ-N-290 for standard packages (unless otherwise specified)
- Custom design available
- RoHS and DFARS compliant

When it comes to today's military, aerospace, and medical applications, the reliability and performance requirements of electronic components have never been so demanding. By delivering superior-quality products for over forty five years, it's easy to see why Mini-Systems is a supplier of choice among design engineers.



MINI-SYSTEMS, INC.
SINCE 1968

508-695-0203

mini-systemsinc.com
info@mini-systemsinc.com

is not to be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without prior written permission from Mini-Systems, Inc. 2017. All rights reserved. For reprints please contact the Publisher.

Frequency Scalable Power Control and Active Tuning for Sub-THz Large-Signal Measurements

Luca Galatro and Raffaele Romano
Vertigo Technologies, The Netherlands

Carmine De Martino and Marco Spirito
Technische Universiteit Delft, The Netherlands

Characterizing electronic devices and MMICs at sub-THz frequencies presents several challenges for the instrumentation. While S-parameter measurements can be performed using vector network analyzers (VNA) with mmWave extenders, large-signal measurements require dedicated measurement setups. A novel approach, described here, expands the capabilities of conventional VNA sub-THz S-parameter setups to achieve refined power control, power sweeps and active load-pull.

The increasing performance of semiconductor technologies in terms of f_t and f_{max} is fostering the development of new commercial applications in the mmWave frequency range. Examples can be found in the development of 5G communication with frequencies up to 80 GHz, automotive radar at 77, 94 and 140 GHz, SATCOM, imaging and home entertainment.

Development for commercial applications inevitably includes characterization of single active devices (i.e., transistors) as well as the testing of ICs such as power amplifiers, detectors and radiometers. The first is to extract and verify the device compact model for frequencies as high as f_t or f_{max} . The latter is to verify IC compliance with the requirements of the final application. Regardless of the scope, the availability of accurate and reliable test instrumentation is fundamental for technology development.

Active device small- and large-signal characteristics must be determined. The first step is typically the measurement of the S-parameters, which can be achieved

using VNAs. Broadband VNAs with coaxial extenders are commercially available up to 220 GHz, while waveguide-banded solutions are available up to 1.5 THz. Limitations of these setups are primarily related to available power, losses in interconnections with increasing frequency (especially for broadband coaxial setups) and the difficulty of controlling power delivered to the device under test (DUT) when waveguide-banded extender modules are used.


For large-signal measurements, one of the most popular techniques is load-pull. Passive tuners are available commercially for frequencies as high as 110 GHz,¹ but performance is generally limited by increased losses at mmWave frequencies, which limits the reflection coefficient that can be presented to the DUT load. Commercial active load-pull systems are currently only available for frequencies lower than 40 GHz.² Few examples of active load-pull systems exist in the literature at higher frequencies,³⁻⁴ and they are all based on dedicated implementations that are generally not scalable.

24 - 40 GHz Sub-Harmonic Pumped Mixer


Ideal for testing and validating 5G solutions.



Typical M28H2KS Mixer Conversion Loss
(LO = 11.5 - 19.5 GHz; IF = 1.0 GHz)

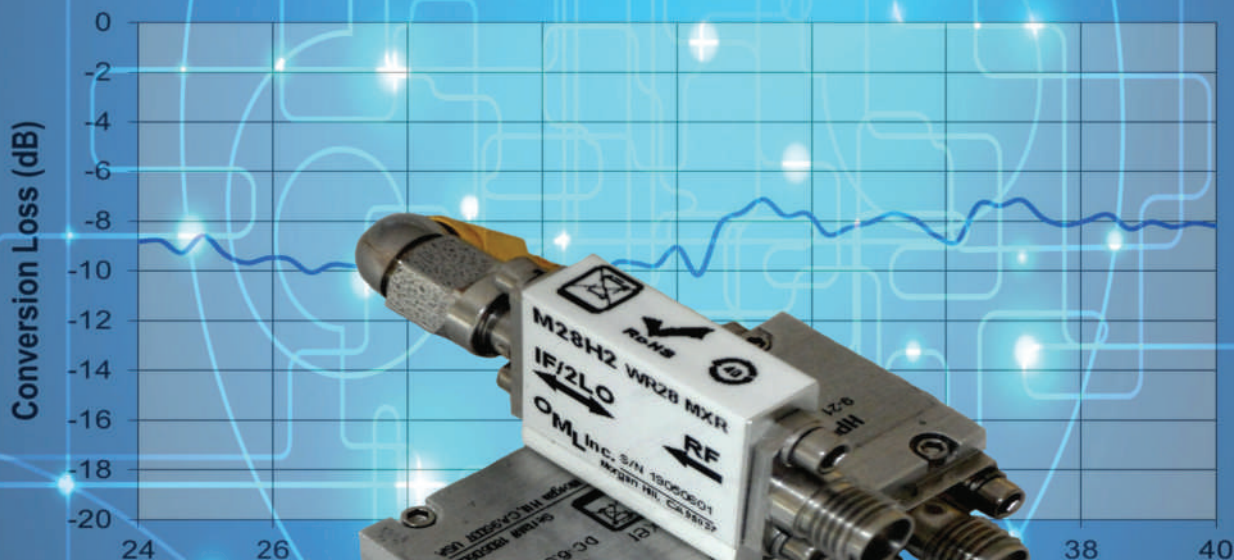

M28H2KS/ DPL921 Assy

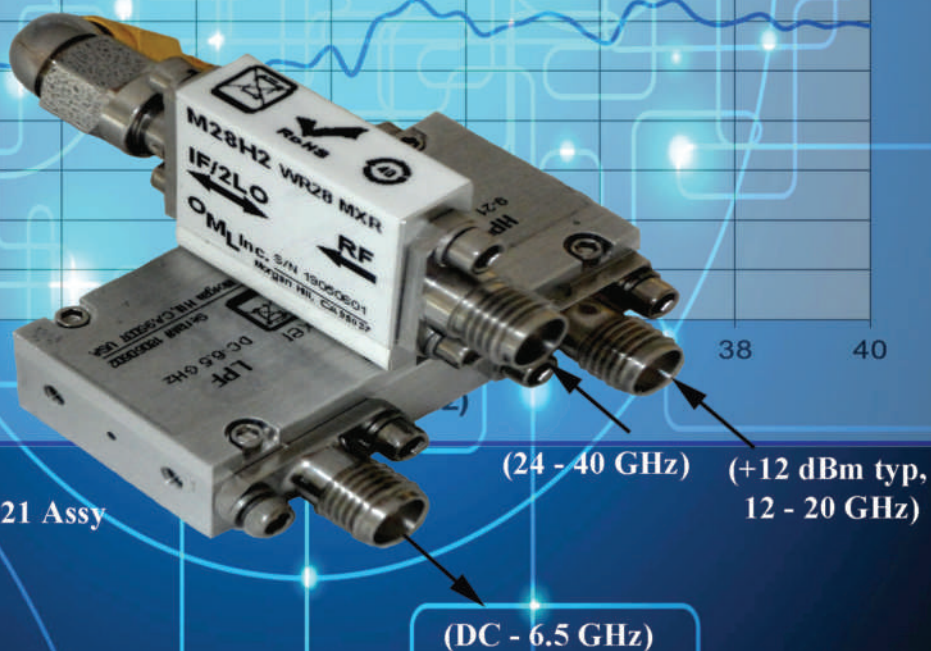

Innovation in Millimeter Wave Solutions

www.omlinc.com

(408) 779-2698

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.
For reprints please contact the Publisher.



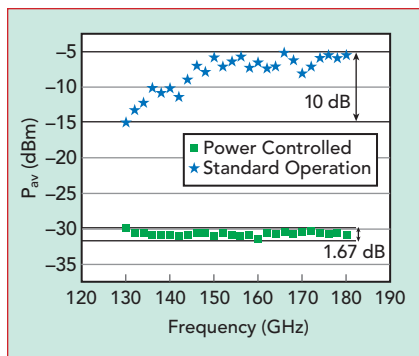


Fig. 1 Output power of a commercial WR5 waveguide extender module showing the nominal output power and a constant -30 dBm set with MMW-STUDIO.

This article describes a measurement approach employing a conventional mmWave VNA with waveguide-banded extenders that has refined power control and power sweep capabilities at any frequency bandwidth covered by the waveguide extenders. With small modifications, the setup can be enhanced to include active tuning capabilities, becoming the first scalable active load-pull setup for sub-THz frequencies.

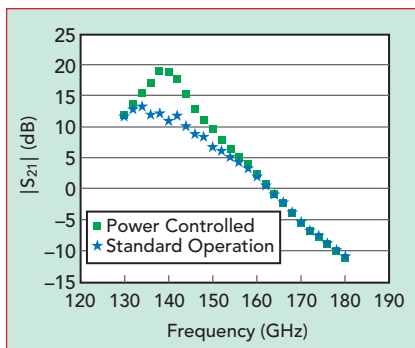


Fig. 2 Measured gain vs. frequency of a two-stage, 130 nm SiGe BiCMOS amplifier using waveguide extenders, comparing nominal power from the extender to power control.

POWER CONTROL LIMITATIONS

For conventional VNA measurements, dynamic range is maximized through power control, which is achieved with the hardware using a feedback architecture called automatic level control (ALC). When mmWave waveguide extenders are used, ALC is implicitly excluded from the measurement loop. Due to the absence of an ALC within the extenders and the nonlinear nature of the internal components, the

power available from the source can vary significantly within the waveguide band. An example is shown in **Figure 1**, where the output power (P_{av}) of a commercially available WR-05 VNA extender is displayed, with a nominal fixed power at the RF input port of the module. In the figure, the power fluctuation is on the order of 10 dB. Similar values can be expected at all bandwidths, depending on the manufacturer.

This lack of power control to the DUT has different implications on the measurement accuracy of active devices. When performing small-signal measurements, if the power level at the input of the DUT fluctuates and cannot be properly controlled, the risk is to either drive the device into an incorrect operating regime—compromising the small-signal characterization—or to reduce the input power level to ensure proper operation and restrict the dynamic range of the measurement.

An example related to reduced power control capability is illustrated by De Martino et al.⁵ in the characterization of a 140 GHz power amplifier. When the DUT, a two-stage 130 nm SiGe BiCMOS amplifier, is characterized using waveguide extenders with a nominal output power, the S-parameters are incorrectly represented in the frequency range between 135 and 160 GHz (see **Figure 2**).

COMPUTER-AIDED POWER CONTROL AND SWEEPS

The absence of ALC when using mmWave waveguide extenders can be circumvented using a dedicated software control loop. Consider the simplified schematic of a conventional VNA setup for mmWave measurements employing extenders, shown in **Figure 3a**, with the addition of an external computer and a power sensor for power calibration. As described by Galatro et al.,⁶ power control can be achieved with the following steps (see **Figure 3b**):

1. S-parameter calibration at the waveguide reference planes.
2. Power calibration by connecting a power sensor to waveguide port 1 and measuring the absolute power during a frequency sweep.
3. Power leveling: nonlinear power responses of the extender modules are characterized over large

Need Space and Mil-Qualified Parts?

Search No Further. Weinschel Associates (WA) delivers solutions for your toughest requirements - on-time and in compliance. Look to WA to launch your next program with Space and MIL-Qualified RF and Microwave Components.

Space and Mil-Qualified Components

- Attenuators - Now up to 50 GHz!
- Terminations - Now up to 50 GHz!
- Dividers
- DC Blocks
- Tuners
- High Performance Designs
- Power Handling to Design Specifications
- Frequency Range: Now DC to 50 GHz!

Visit our new website with interactive catalog and online RFQ!

www.WeinschelAssociates.com

**2505 Back Acre Circle
Mount Airy, MD 21771
Voice: 301.963.4630
Fax: 301.963.8640
sales@WeinschelAssociates.com**

WEINSCHEL ASSOCIATES
BROADBAND RF & MICROWAVE SOLUTIONS

EXODUS

ADVANCED COMMUNICATIONS

Best in Class RF Amplifier SSPA's



Designed for harsh environmental applications

EMC applications

Ranges from 1MHz to 40GHz, Exodus' EMC line of products offer solid state solutions to meet today's EMI/EMC requirements. Our Broadband solid state solution enables us to provide a better alternative solution to TWTAs which means extended product usage life and improved cost of ownership.

MILITARY applications

Ranging from HF to V bands, Exodus' military line of products cover LOS, SATCOM, Radar, Jamming, Telemetry, and Land Mobile Communication applications. Military line of products are ruggedized for harsh environmental usage & extended product life and provided with enhanced controls for blanking operations. Light weight units are also available for avionic application which are up to 50% lighter than equivalent commercial units.

COMMERCIAL applications

Ranges from HF to Ka band, Exodus' commercial line of products cover industrial, scientific, medical, wireless, mobile, commercial avionics, and SATCOM applications. We provide cost competitive and industry leading packaging techniques for superior product ownership experience.

High Power Solid State Power Amplifiers

Chip & Wire Hybrid Assemblies, Modules & Systems

Broadband, CW, Pulse & Linear Applications

10kHz to 51GHz, 3KW CW, 10KW Pulse

Medium Power Amplifiers

10kHz to 51GHz, 2W P1dB and below

Low Noise Amplifiers

Block Up Converters



AMP4066LC

3674 E. Sunset Road, Suite 100
Las Vegas, Nevada 89120 USA
Tel : 1-702-534-6564
Fax : 1-702-441-7016
Email : sales@exoduscomm.com



EXODUS ADVANCED
COMMUNICATIONS

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.
For reprints please contact the Publisher.

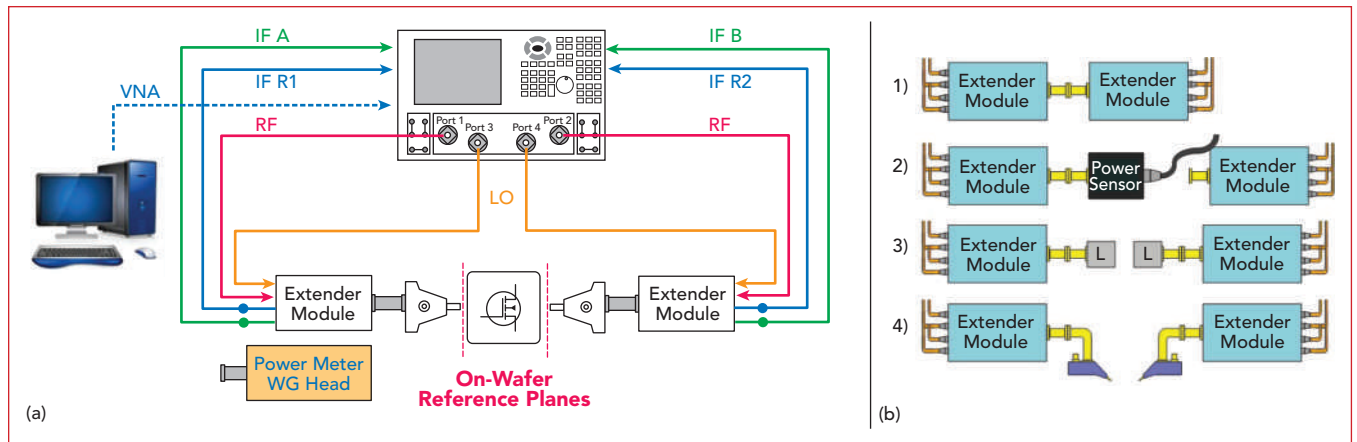


Fig. 3 Conventional mmWave measurement using waveguide extenders with a 4-port, two-source VNA (a) and the four-step calibration procedure (b).

sweeps of input power and frequency while measuring the power delivered at the waveguide test port directly using the VNA receivers. This uses the power calibration performed in Step 2.

4. On-wafer calibration shifts all the calibration reference planes (S-parameter, power and leveling) to the desired on-wafer reference plane. After this four-step procedure, it

is possible to accurately control and measure the power provided to the DUT using the high dynamic range and speed of commercial VNAs, as the use of slower and low dynamic range power meters is limited to the power calibration in Step 2.

IMPACT OF POWER CONTROL

The capability of controlling power during S-parameter measurements alleviates measurement inac-

curacies related to improper device driving. For example, the device described by De Martino was tested using the power control procedure described above and embedded in MMW-STUDIO, a software platform developed by Vertigo Technologies and TU Delft for accurate sub-THz measurements. In this case, the power is maintained at -30 dBm over the entire frequency range (see Figure 1) to ensure small-signal operation. This ensures correct measurement of the S-parameters as shown in Figure 2, where S_{21} is accurately characterized over the entire bandwidth.

The four-step procedure described enables doing more than just controlling power during S-parameter measurements. The capability of controlling and measuring power can also be used to perform power sweeps to derive large-signal characteristics such as gain compression. **Figure 4** shows measurement results for power sweeps at different frequencies of the PA described above. Note that the measurement of approximately 250 data points took only about 4.5 minutes, compared to 2 hours to properly perform all the measurements using a power meter setup.

SUB-THz ACTIVE LOAD-PULL

As shown in the previous section, using a four-step calibration and the aid of external computation enables large-signal measurements at mmWave frequencies by employing off-the-shelf equipment designed for small-signal measurements, i.e., the same equipment commonly used

10 MHz SLOW TRANSITION LOW-G PHASE LOCK CRYSTAL OSCILLATOR

- Smooth Frequency Transition on Loss/Reacquisition of Ext Ref
- Frequency Calibration and Aging Correction Function
- To -140 dBc/Hz @ 10 Hz offset
- PLL LBW: ≤ 0.1 Hz
- Low G-Sensitivity to $\leq 1E-10/g$
- Package: $2.5 \times 2.5 \times 0.6$ in
- Vibration Isolated Option

"Quietly the Best"

Wenzel Associates, Inc.
2215 Kramer Lane, Austin, Texas 78758
512-835-2038 • sales@wenzel.com
www.wenzel.com

Visit us at SATELLITE 2020
in Booth #2112



Interconnect Solutions That Ensure Precise Tests & Measurements

That's **Performance** with **Purpose**

In test and measurement, nothing but perfect performance will do. And you've made it your purpose to achieve it. That's why we've made it our purpose to be your one-stop-shop that can meet all of your high performance, interconnect technology needs.

For performance with purpose, partner with Carlisle.




CARLISLEIT.COM

DESIGN • BUILD • TEST • CERTIFY



Content is copyright protected and provided for personal use only - not for reproduction or retransmission.
For reprints please contact the Publisher.

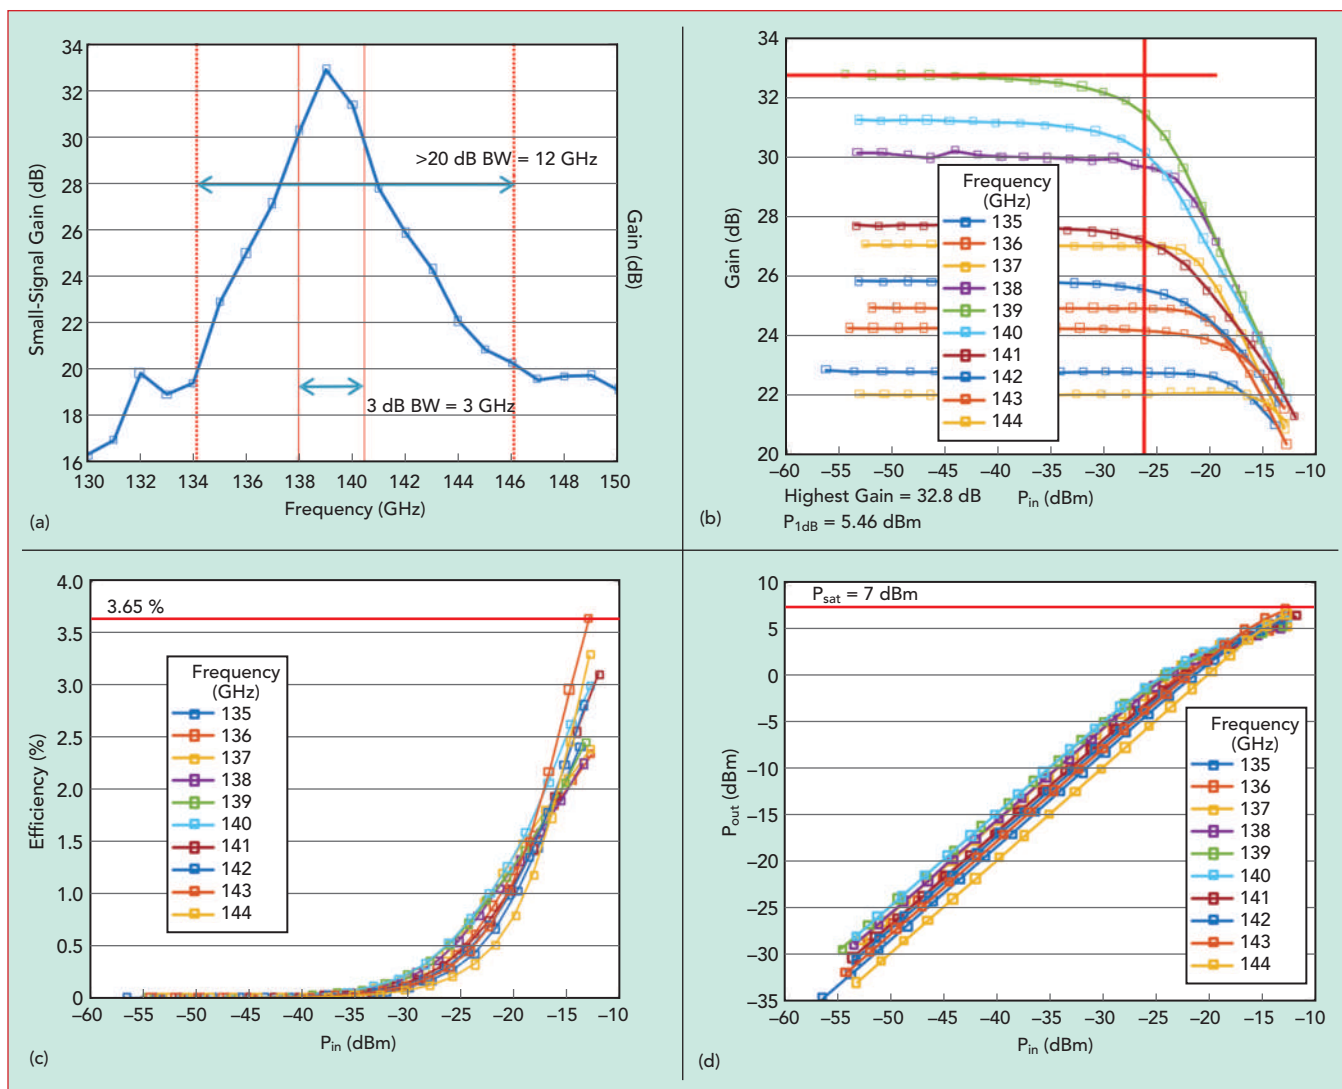

▲ Fig. 4 Measured performance of a two-stage, 130 nm SiGe BiCMOS amplifier, showing the small-signal gain vs. frequency (a), gain vs. P_{in} (b), efficiency vs. P_{in} (c) and P_{out} vs. P_{in} (d).

ERZIA



- Fast Delivery
- From DC to 100 GHz
- Rugged design under MIL-STD
- ITAR Free
- High Reliability: 3 Years Warranty
- ISO 9001: 2015 & EN 9100:2016 Certified



RF Amplifiers and Integrated Assemblies

Aerospace / Defence / Laboratory / Research

High Power Amplifier	Freq (GHz)	Pout (dBm)	Gain (dB)
ERZ-HPA-3300-4700-29	33-47	29	30
ERZ-HPA-2600-4000-33	26-40	33	35
ERZ-HPA-3000-4000-32-E	30-40	32	39
ERZ-HPA-1500-2700-29-E	15-27	29	34
ERZ-HPA-0850-0980-55	8.5-9.8	55	38
ERZ-HPA-0790-0840-37-E	7.9-8.4	37	36

Low Noise Amplifier	Freq (GHz)	NF (dB)	Gain (dB)
ERZ-LNA-0200-5000-22-6	2-50	5	22
ERZ-LNA-0100-4000-45-5	1-40	5	45
ERZ-LNA-2600-4000-30-2.5	26-40	2.5	30
ERZ-LNA-0200-1800-18-4	2-18	3	20
ERZ-LNA-0050-1800-15-3	0.5-18	3.5	15
ERZ-LNA-0270-0310-30-0.5	2.7-3.1	0.5	30



ERZIA Technologies
Santander, Spain Tel: +34 942 29 13 42

sales@erzia.com
www.erzia.com

ERZIA Technologies of America
Arlington, VA, US. Tel: +1 202-899-9717



cadence[®]
welcomes




TOMORROW'S DESIGNS REQUIRE *SMARTER* SOFTWARE TODAY



AWR Design Environment software provides a seamless platform for developing next-generation wireless electronics and communications systems, from concept to product. Its powerful interface, integrated system, circuit, and electromagnetic simulation technologies, and design flow automation ensures your design success.

Visit awr.com/smarterdesign to learn more.

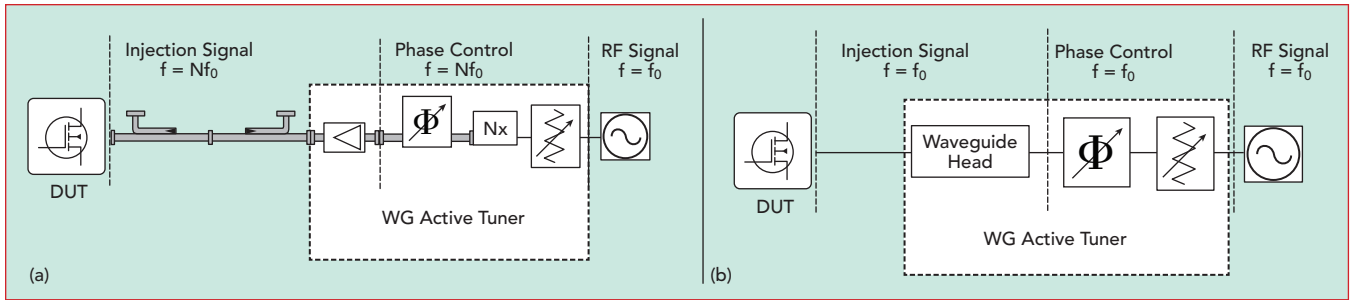

▲ Fig. 5 Two active tuner implementations: modulating the injected signal after (a) and before frequency multiplication (b).

for simple, non-power controlled, S-parameter measurements. The large-signal capabilities of the setup, however, are limited, and only matched measurements can be performed, since the load or source impedance presented to the DUT cannot be changed with respect to the system intrinsic impedance.

To perform more advanced measurements (i.e., active load-pull), the hardware setup needs improvement. The realization of an active load-pull setup requires an active tuner, which changes the impedance condition by properly injecting a defined signal, controllable both in phase and amplitude, into the DUT terminal. Considering the system previously described, while it is possible to modulate the power injected into the DUT, no phase control is available.


To incorporate phase control, a programmable phase

shifter must be inserted into the signal injection path. The intuitive solution is to place the phase shifter just before the reflectometer, enabling phase modulation directly on the frequency-multiplied signal (see **Figure 5a**). This implies modification of the mmWave extender by employing a mmWave phase modulator. While suitable from a measurement perspective, the high cost of such a component with the complexity of a hardware modification inside a mmWave extender makes this solution unrealistic. If, however, the phase shifter is placed before the mmWave extender (see **Figure 5b**), phase modulation is performed on the RF signal before frequency multiplication, thus at a lower frequency with respect to the measurement. This allows more flexibility and a lower cost, since lower frequency components are used for the phase shifter and the waveguide extender need not be modified.




**REQUEST YOUR
FREE EVALUATION**
www.txcorp.com | (303) 448-0727

VSIm: Predict Multipaction at Multiple Power Levels in a Single Run with Standard or Custom SEY Models

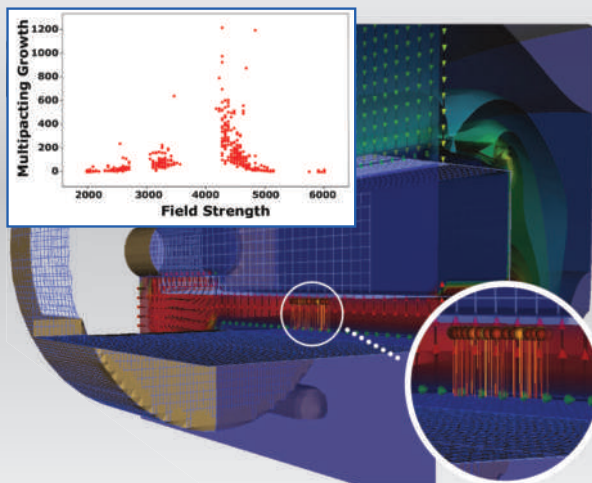

VSIm offers state-of-the-art computations of multipacting. You can compute multipacting at multiple field strengths in one run, tracking the multipacting electrons. For your computations, you can set your custom secondary electron yield and surface emission models and set them on a per-object basis. VSIm uses FDTD, PIC, finite volume, and direct-simulation Monte Carlo (DSMC) methods. VSIm includes diagnostics to collect particle and field data in 3D, 2D, or 1D, which you can postprocess to obtain custom results.

RSim: 3D CAD Monte Carlo Simulation of Radiation Transport with a Graphical User Interface

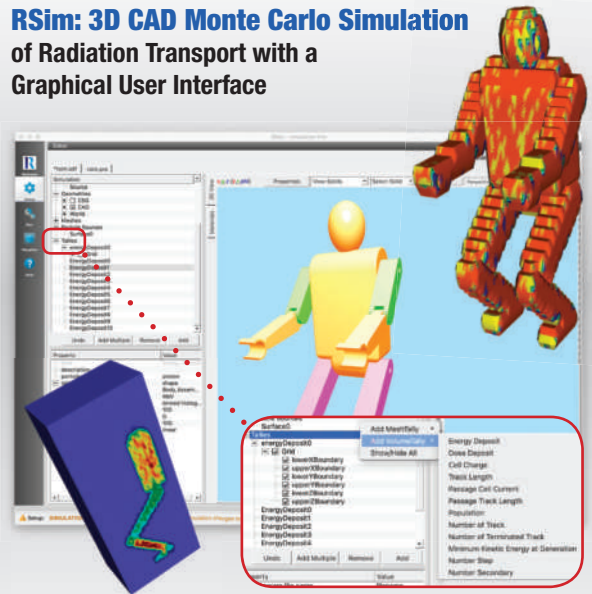

RSim offers the power of Geant4 combined with an easy-to-use Graphical User Interface for setting up and running simulations: Constructive Solid Geometry with Boolean operations, CAD import (STEP and STL), General Particles Sources, materials from a database and created by a user, materials assignment, volume and mesh tallies and 3D visualization of the setup and simulation data. RSim exports geometries into GDML, Moab, STL, HDF5, Tetgen and GMSH formats. Users can inspect and heal "bad" geometries.

RF-LAMBDA

THE LEADER OF RF BROADBAND SOLUTIONS

EUROPE

DEUTSCHLAND



RF SWITCHES

MM / MICROWAVE DC-90GHz




160 CHANNELS
mm/Microwave

0.05-20GHz

Filter Bank Switch Matrix

For Phase Array Radar Application Satellite communication.

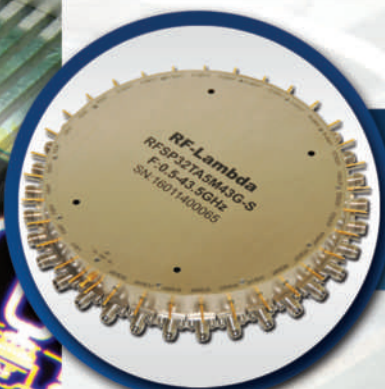


PN: RFSP32TA5M43G

SP32T SWITCH 0.5-43.5GHz

PN: RFSP16TA5M43G

SP16T SWITCH 0.5-43.5GHz

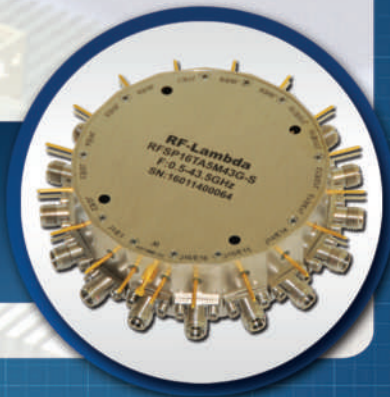

www.rflambda.com
sales@rflambda.com

1-888-976-8880

1-972-767-5998


San Diego, CA, US

Plano, TX, US

Ottawa, ONT, Canada

Frankfurt, Germany

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.
For reprints please contact the Publisher.

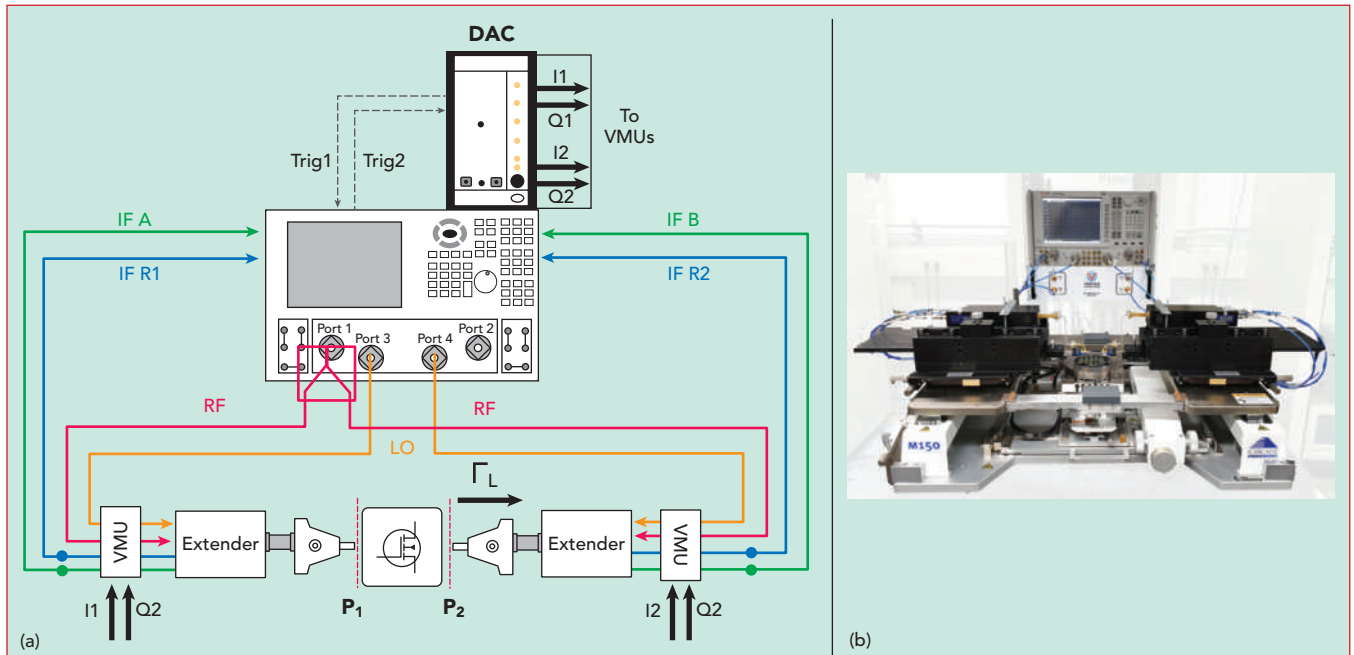

▲ Fig. 6 The scalable active load-pull test bench for measurements at sub-THz frequencies (a) and view of the complete on-wafer active load-pull system (b).

FREQUENCY SCALABLE ACTIVE TUNER

Once the topology of Figure 5b is chosen, the actual implementation must be defined. The choice of the

waveguide head is defined by the specific frequency range, which, in principle, is arbitrary, as it does not affect the lower frequency hardware. For the amplitude and phase

modulation, appropriate components must be chosen. In the case of MMW-STUDIO, amplitude (power) modulation of the injection signal is obtained directly from the RF source of the VNA, while power control is achieved by means of calibration.

For an open loop active load-pull architecture, one of the main requirements is phase coherence between the injected waves at the input and the output of the DUT: the two injected signals must share the same time base. The easiest and most reliable approach is for the two injected waves at the test ports to share the same RF source.⁷ If that is the case, and it is desired to use just one RF source of the VNA to control both injections, it is not possible to independently control the power at each port with the same source. If independent power modulation at the two ports is required, another solution must be used. The use of I/Q modulators, as in mixed signal active load-pull⁸ at mmWave frequencies,⁶ could allow both power and phase modulation for each port, independently. The main difference with mixed signal active load-pull is that signal modulation is performed at a different frequency than the measurement frequency.

Using these considerations, the classical schematic of Figure 3a is modified in **Figure 6a** to achieve active load-pull capabilities. Figure

Precision Right Angle Adapters in Stock

 C5540 \$135 N 18 Ghz VSWR 1.25	 C2563 \$130 TNC 18 Ghz VSWR 1.25	 C7054 \$165 3.5 33 Ghz VSWR 1.25	 C7035 \$220 2.92 40 Ghz VSWR 1.25
 C3435 \$60 SMA 27 Ghz VSWR 1.15	Fast Delivery! Low VSWR! Huge Inventory!		 C7552 \$297 2.4 50 Ghz VSWR 1.40
 C3239 \$45 SMA 18 Ghz VSWR 1.25			 C3407 \$60 SMA 27 Ghz VSWR 1.15

CentricRF™ www.CentricRF.com 1-800-399-6891

Your partners in performance for mission critical RF systems



2.7-3.5 GHz 100 Watt GaN Power Amplifier

Qorvo's QPA3069 is a high-power S-band amplifier fabricated on Qorvo's production 0.25 μm GaN-on-SiC process (QGaN25). The PA provides 50 dBm of saturated output power and 25 dB of large-signal gain while achieving 53% power-added efficiency. With good thermal properties, it can support a range of bias voltages and is ideal for military radar systems.

Qorvo's GaN-on-SiC RF solutions set the standard for MTTF reliability – over 10 million hours at 200° based on more than 16,000 devices with 65 million device hours. Qorvo's GaN enables mission critical aerospace, defense and radar systems requiring smaller, more efficient solutions with longer operating life.

To learn how Qorvo GaN powers the systems all around you, visit www.qorvo.com/gan

© Qorvo, Inc. | 2019. QORVO is a registered trademark of Qorvo, Inc. in the U.S. and in other countries.

QORVO

www.qorvo.com

For samples and
orders, contact our
worldwide distributor.



www.rfmw.com

ZERO BIAS SCHOTTKY DETECTORS

For 0.01 - 50 GHz



Many Models Available in Stock



- > Single unit covers 0.01 - 50 GHz
- > Matched input for low VSWR
- > Flat frequency response
- > High sensitivity (0.5 mV/μW up to 50 GHz)
- > Optional output connectors (SMA, BNC, SMC)
- > Great for instrumentation and laboratory use

MODEL	FREQ. RANGE	MAX. VSWR	MAXIMUM FLATNESS (± dB)	LOW LEVEL SENSITIVITY (mV / μW)
DZR50024A	10 MHz-50 GHz	1.3:1 (to 18 GHz)	± 0.3 (to 18 GHz)	0.5
DZR50024B	10 MHz-50 GHz	1.6:1 (to 26 GHz)	± 0.5 (to 26 GHz)	0.5
DZR50024C	10 MHz-50 GHz	1.8:1 (to 40 GHz) 2:1 (to 50 GHz)	± 0.8 (to 40 GHz) ± 1.0 (to 50 GHz)	0.5

*All models have 2.4 mm (M) input connector
*Standard output polarity is negative.
Add letter "P" to end of model number for positive output.

Custom Designs - Write / Call for Quote

Other Products:

Amplifiers, Comb Generators, Limiters, Switches, Integrated Subsystems



155 BAYTECH DRIVE, SAN JOSE, CA. 95134-2303
PH: 408-941-8399 . FAX: 408-941-8388
E-Mail: Info@Herotek.com
Web Site: <http://www.herotek.com>
Visa/MasterCard Accepted

TechnicalFeature


6a is a simplified block diagram of the implementation realized by Vertigo Technologies, where the I/Q modulators are embedded in general vector modulation units (VMU). The VMUs are both driven by port 1 of the VNA through a power splitter, to ensure total phase coherence, at a fixed power. The I/Q modulators are used as phase/amplitude modulators with DC signals (I and Q) generated through a high bit count (24-bit) digital-to-analog converter that is synchronized with the VNA through a handshaking loop to ensure high speed. The frequency at which the VMUs operate is the same as the RF input frequency of the extender modules, typically in the range between 5 and 20 GHz for most commercially available extenders for output frequencies to 1.1 THz. The signal modulated by the VMU is presented to the extenders and is up-converted to the desired frequency. The up-converted signal becomes the injection signal for the active tuner; using an iterative procedure, it is possible to perform active load-pull measurements.

Figure 6b shows a practical implementation of a complete on-wafer active load-pull system working


TABLE 1

LOAD CONTROL STABILITY VS. FREQUENCY

Frequency (GHz)	Stability of $ \Gamma_L $ (Standard Deviation)	Stability of $\angle \Gamma_L$ (Standard Deviation - Phase)
96	0.002	0.05
140	0.0035	0.33
180	0.0016	0.17
288	0.001	0.29
500	0.0046	0.57

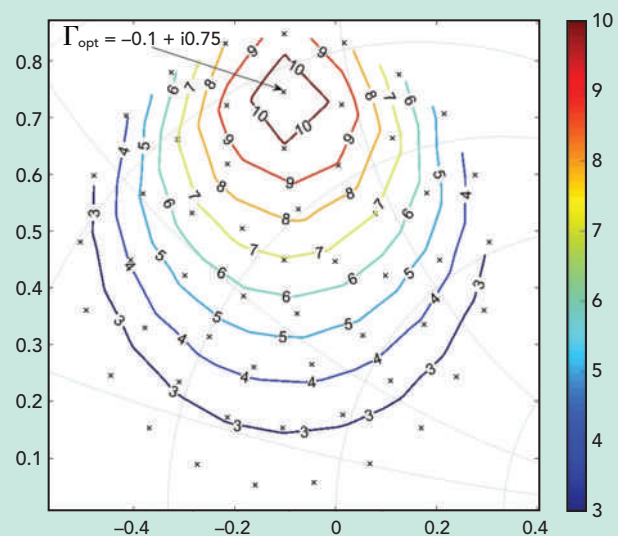

(a)

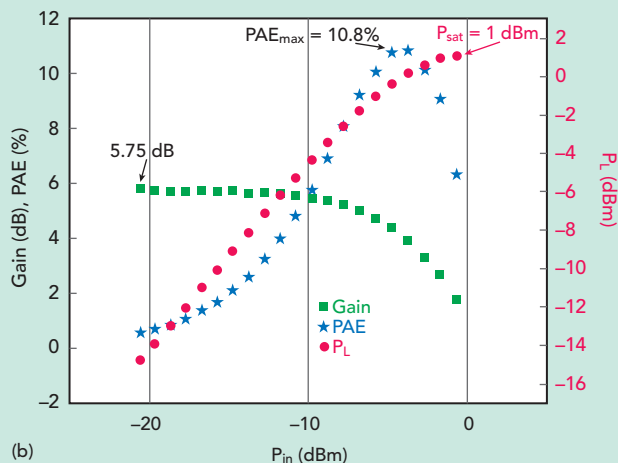

(b)

▲ Fig. 7 Active load-pull measurements of a two-fingered, 130 nm SiGe BiCMOS HBT at 125 GHz, showing the PAE contours (a) and the gain, PAE and power delivered to the load at the optimum PAE load (b).

in the WR6.5 waveguide band (110 to 170 GHz). The VMUs for both the input and the output are conveniently assembled in a single rack-mount case for ease of mounting and signal distribution. The system of Figure

MILITARY AND AEROSPACE INTERCONNECTS AT THE READY



From high-volume production, to low-volume customized products, MilesTek is your source for military, aerospace, communications and industrial interconnect solutions. With quick turnaround and same-day shipping from our stock of more than 10,000 highly reliable products, MilesTek is at the ready to help meet your project deadlines.

The MilesTek Advantage:

- Large In-Stock Inventories
- Same-Day Shipping
- Prototype Development
- CAD Design Capabilities
- Multiple Testing Solutions
- Expert Technical Support
- AS9100 Certified
- SO 9001:2008 Registered



866-524-1553 • MilesTek.com

MilesTek
an INFINIT® brand

Available for Same-Day Shipping!

Content is copyright protected and provided for personal use only. All rights reserved. For reprints please contact the Publisher.

6b, together with the MMW-STUDIO LP software, can perform active load-pull measurements at any desired load impedance (depending on the DUT and the extender specifications), ideally at every frequency covered by mmWave extenders. This setup has been tested up to 500 GHz with stability better than 0.01 in magnitude and 0.6 degrees in phase. **Table 1** shows a summary of load control stability at different measured frequencies.

Figure 7 shows the large-signal characterization of a commercial, double-finger 130 nm SiGe BiCMOS HBT. The test was performed at 125 GHz with more than 54 different loading conditions and an input power sweep from -21 to -1 dBm. ZC140 extender modules from Rohde & Schwarz were used, featuring a nominal available power of 8 dBm. Figure 7a shows the power-added efficiency (PAE) contours, identifying the optimum loading condition

for peak PAE: $\Gamma_{\text{opt}} = -0.1 + i0.75$. Figure 7b shows the measured gain, PAE and power delivered to the load (P_L) versus the input power, P_{in} , at Γ_{opt} . To the authors' knowledge, the results of Figure 7 represent the first published active load-pull measurements of an active device at frequencies higher than 110 GHz.

CONCLUSION

With the aid of software, dedicated calibration and small hardware modifications, it is possible to expand the capabilities of conventional waveguide extender-based VNA setups to perform accurate power control, power sweeps and active load-pull measurements in the sub-THz frequency range. The described approach is scalable to every frequency band covered by mmWave waveguide extenders and has been tested to 500 GHz. Measurements of commercial BiCMOS devices at 125 GHz show the capability of this approach to fully characterize realistic devices using off-the-shelf equipment. ■

References

1. "LXI™ Millimeter-Wave Automated Tuners Data Sheet 4T-050G05," Maury Microwave, www.maurymw.com/pdf/datasheets/4T-050G05.pdf.
2. "MT1000 and MT2000-Mixed-Signal Active Load Pull System (1 MHz to 40 GHz) and MT2001 System Software Data Sheet 4T-097," Maury Microwave, www.maurymw.com/pdf/datasheets/4T-097.pdf.
3. L. Galatro, M. Marchetti and M. Spirito, "60 GHz Mixed Signal Active Load-Pull System for Millimeter Wave Devices Characterization," *Proceedings of the 80th ARFTG Microwave Measurement Conference*, November 2012.
4. V. Teppati, H. Benedickter, D. Marti, M. Garelli, S. Tirelli, R. Löbblom, R. Flückiger, M. Alexandrova, O. Ostinelli and C. R. Bolognesi, "A W-Band On-Wafer Active Load-Pull System Based on Down-Conversion Techniques," *IEEE Transactions on Microwave Theory and Techniques*, Vol. 62, No. 1, January 2014, pp. 148–153.
5. C. De Martino, Z. Hu, L. Galatro, G. Sarris and M. Spirito, "Power Level Control of mmWave Test Benches for Accurate Small and Large-Signal DUT Measurements," *Proceedings of the 88th ARFTG Microwave Measurement Conference*, December 2016.
6. L. Galatro, S. Galbano, A. Santaniello and M. Spirito, "Power Control for S-parameters and Large Signal Characterization at (sub)-mmWave Frequencies," *Proceedings of the 85th ARFTG Microwave Measurement Conference*, May 2015.
7. Y. Takayama, "A New Load-Pull Characterization Method for Microwave Power Transistors," *IEEE MTT-S International Microwave Symposium Digest*, June 1976, pp. 218–220.
8. M. Marchetti, M. Pelk, K. Buismann, W. Neo, M. Spirito and L. C. N. de Vreede, "Active Harmonic Load-Pull with Realistic Wideband Communication Signals," *IEEE Transactions on Microwave Theory & Techniques*, Vol. 54, No. 12, December 2008, pp. 2979–2988.

SATCOM TRANSMITTER
SSPA's from Empower

Space Available

When you modernize an older uplink system with an SSPA from Empower RF, what will you do with the free space?

- * 2X Improvement in SWaP
- * Higher Efficiency
- * Higher MTBF's
- * Waveform Flexibility
- * Rugged for Mobile Deployment
- * Remote Monitoring and Control
- * Active RF Device Redundancy – Graceful Degradation

Model 2176
 1.75 to 2.12 GHz
 4000 Watts



www.EmpowerRF.com
 1(310)412-8100

EMPOWER RF SYSTEMS, INC.



Software for Simulating 5G mmWave and MIMO Systems

Remcom's unique ray tracing capability simulates the detailed multipath of large MIMO arrays while overcoming the limitations of traditional ray tracing methods.

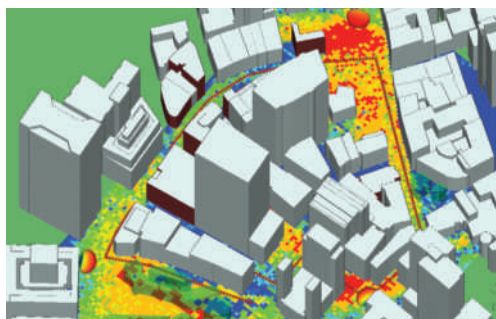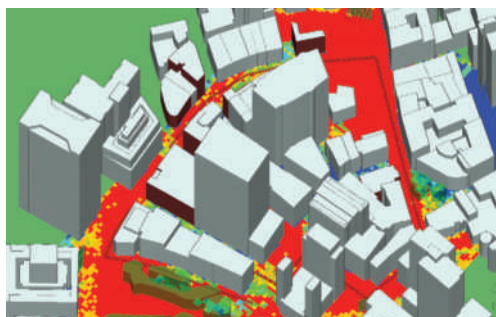

Beamforming with massive MIMO (top) shows significant improvement to throughput over links between single antennas (bottom)

- 3D ray tracing valid up to 100 GHz
- Simulate massive MIMO arrays
- MIMO beamforming, spatial multiplexing, and diversity techniques
- Throughput and capacity for MIMO systems
- Diffuse scattering
- High-performance computing

Learn more at www.remcom.com/5g-mimo >>>

+1.888.7.REMCOM (US/CAN) | +1.814.861.1299 | www.remcom.com



Content is copyright protected and provided for personal use only - not for reproduction or retransmission.
For reprints please contact the Publisher.

Pillars of 5G: Spectral & Energy Efficiency

Corbett Rowell
Rohde & Schwarz, Munich, Germany

5G deployment is driven by two key factors that are typically in conflict with each other: system capacity (spectral efficiency) and system cost (energy efficiency). Spectral efficiency describes how much capacity can be provided and is typically measured in bps (bits per second) per Herz of frequency, whereas energy efficiency characterizes how much it costs to run the network for a given capacity.

In the past generations of mobile technology, the cost of the provision of higher capacity was almost directly proportional, as this involved building more base stations or increasing the spectral bandwidth (BW) inside the network. While this was roughly sustainable in the past, the demands for 10 to 100× the capacity of 4G networks make this approach a path to bankruptcy, as it is unlikely the consumers of the increased capacity are willing to increase their expenditure by 10 to 100×. As illustrated in **Figure 1**, in order to advance the mobile networks, the industry needs to solve the problem of how to increase capacity across the entire network while simultaneously decreasing the costs of running the network.

HOW MUCH DOES IT COST TO RUN A CELLULAR NETWORK?


Although the base stations have become more energy efficient from 2G to 4G, the costs of providing more capacity through network densification have increased significantly (see **Figure 2**). Most of the cost of setting up and operating a cellular network is in the remote provision of air conditioning and site rental for the base stations.¹⁻² In terms of the initial CAPEX, the air conditioning is over 50 percent, leaving the remaining for the base station equipment. Similarly, in terms of recurring OPEX, electricity is almost 50 percent of the costs. Most of the electricity is for the op-

eration of the remotely distributed air conditioning network used to cool the baseband processors (radio units are typically air-cooled and do not require additional air conditioning). The actual transmission of energy is only 7 percent of the OPEX. If more base stations are deployed, the 30 percent of site rent scales accordingly, making it unattractive to simply deploy more base stations (this could become a problem for 5G FR2 with reduced cell sizes compared to 5G FR1).

From the analysis of the power consumption, it is clear that most of the costs are due to the distributed and remote deployment of air conditioning for the baseband processing portion of a base station. China Mobile proposed to centralize the baseband processing in a manner similar to data storage facilities for the internet. **Figure 3** illustrates the architecture of the baseband cloud

where each baseband for a base station becomes a virtual machine inside the cloud (C-RAN). Even traditionally separate network appliances such as gateways can be integrated into the cloud as virtual machines. By centralizing the baseband processing, the remote air conditioning becomes centralized, thereby significantly decreasing both OPEX and CAPEX. In addition, it is easier to realize CoMP where separate base stations transmit to a mobile phone (network MIMO) with a centralized control, increasing the spectral efficiency at the same time. This architecture is independent of the Radio Access Network and can be used to control a mixed generation cellular network.

The type of information being transmitted also influences the energy efficiency of the network. As shown in **Figure 2**, different types of data have different data packet to signaling packet ratios (DSR). A

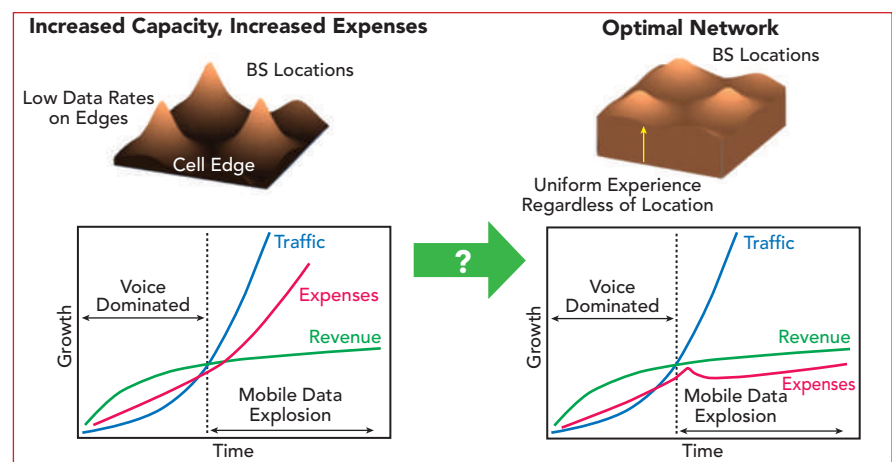

▲ **Fig. 1** 5G business case. Drive profit by reducing expenses (energy efficiency).

The Right RF Parts. Right Away.



We're RF On Demand, with over one million RF and microwave components in stock and ready to ship. You can count on us to stock the RF parts you need and reliably ship them when you need them. Add Fairview Microwave to your team and consider it done.

Fairviewmicrowave.com
1.800.715.4396

 **Fairview Microwave**
an INFINIT® brand

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.
For reprints please contact the Publisher.

CERNEX&CernexWave

AS9100D & ISO9001

RF, MICROWAVE & MILLIMETER-WAVE
COMPONENTS AND SUB-SYSTEMS
UP TO 500GHz




AMPLIFIERS UP TO 110GHz
FREQUENCY MULTIPLIERS/DIVIDERS
(UP TO 160GHz)

CONVERTERS UP TO 110GHz
ANTENNAS UP TO 220GHz

COUPLERS UP TO 220GHz
FERRITE PRODUCTS
(ISOLATORS/CIRCULATORS)
UP TO 160GHz

FILTERS/DIPLEXERS
SOURCES UP TO 160GHz

SWITCHES UP TO 160GHz
PHASESHIFTERS UP TO 160GHz



TRANSITIONS/ADAPTERS (UP TO 325GHz)
WAVEGUIDE PRODUCTS UP TO 325GHz


TERMINATIONS/LOADS UP TO 160GHz
MIXERS (UP TO 110GHz)

ATTENUATORS (UP TO 160GHz)
DETECTORS (UP TO 160GHz)

LIMITERS (UP TO 160GHz)
BLAS TEE (UP TO 100GHz)

POWER COMBINERS/DIVIDERS EQUALIZERS

CABLES
ASSEMBLIES/CONNECTORS (UP TO 100GHz)
SUB-SYSTEMS (UP TO 100GHz)



www.cernex.com sales@cernex.com
Add: 1710 Zanker Road, Suite 103 San Jose, CA 95112
Tel: (408) 541-9226 Fax: (408) 541-9229

www.cernexwave.com sales@cernexwave.com
Add: 1710 Zanker Road, Suite 202 San Jose, CA 95112
Tel: (408) 773-8855 Fax: (408) 773-8858

SpecialReport

low DSR represents a low usage of the channel to transmit data; for example, text messages which represent 60 percent of all network traffic have a DSR between 1 to 3 whereas photos and videos are more energy efficient as this data requires fewer signaling packets. 5G FR1 addresses this problem by adjusting the

subcarrier spacing to allow different types of data to more efficiently use the available channel capacity.


WHAT DETERMINES THE CAPACITY OF A NETWORK AND HOW CAN IT BE INCREASED?

In the early 1900s, two researchers working independently derived a relatively simple equation that serves as a Moore's Law for the wireless industry: the Shannon-Hartley theorem. This theorem gives an upper bound to the amount of information that can be transmitted over the wireless channel where the individual channel capacity is dependent on only two parameters: channel BW and the signal-to-noise-ratio (SNR). While the capacity scales linearly with the channel bandwidth, it only scales at log2 for the signal to noise ratio:

$$C_j = BW \log_2(1 + SNR)$$

From the Shannon-Hartley theorem, there are three basic methods to increase network capacity (see **Figure 4**):

1. Increase the channel BW: In 4G, carrier aggregation is used to increase the available signal bandwidth and 5G FR2 uses the mmWave frequencies to obtain larger capacities.
2. Increase the number of channels: MIMO utilizes the multipath scattering inside the network to concurrently transmit on several channels at the same time. Similar to the channel BW, network capacity also scales linearly with this effect, but with an upper limit determined by the correlation (or similarity) of the multipaths inside the network. 5G FR1 relies on scaling up MIMO to provide increased data rates.
3. Increase the output power of the network: Due to the presence of the noise in the SNR, the asymptotic log scaling of the SNR, and health/safety concerns of high electromagnetic energy, this method has its limits. One safer method of increasing the SNR throughout the network is the use of femtocells in areas of decreased coverage. If too many omnidirectional femtocells are deployed in a single area, however, the interference between the femtocells provides

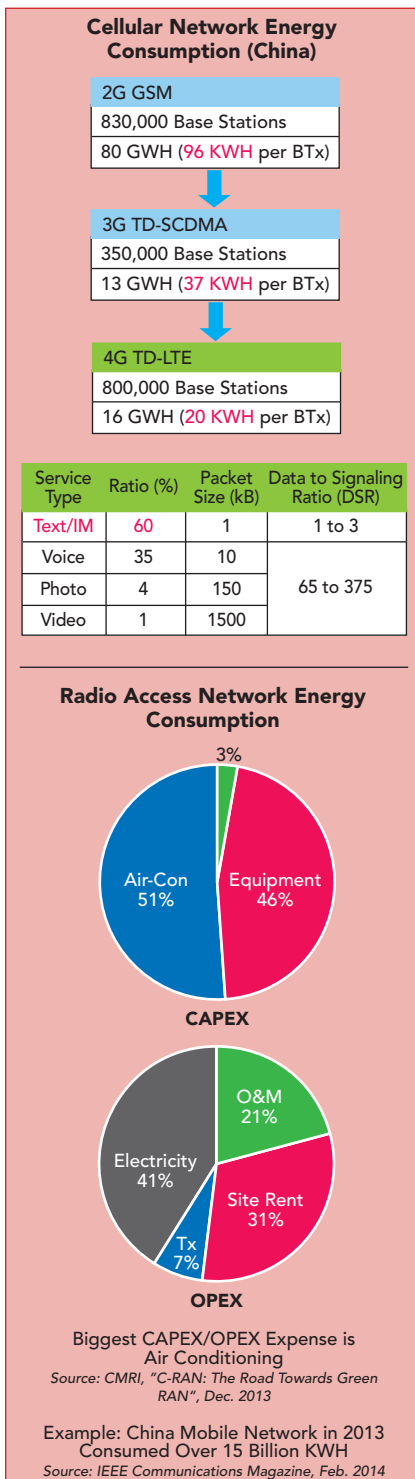

▲ **Fig. 2** Power consumption in a cellular network.

Double Ridge Waveguides

Designation (WRD)	Waveguide Code	Frequency (GHz)
200 - D24	D200	2.00 - 4.80
350 - D24	D350	3.50 - 8.20
350 - D36	D351	3.50 - 12.40
475 - D24	D475	4.75 - 11.00
500 - D36	D500	5.00 - 18.00
650 - D28	D650	6.50 - 18.00
750 - D24	D750	7.50 - 18.00

End-Launched


WG to Coax Adapters

available with any standard coaxial Connector

Rectangular Waveguides

Designation			Waveguide Code	Frequency (GHz)
EIA (WR)	DEF (WG)	IEC (R)		
650	6	14	R650	1.12 - 1.70
510	7	18	R510	1.45 - 2.20
430	8	22	R430	1.70 - 2.60
340	9 A	26	R340	2.20 - 3.30
284	10	32	R284	2.60 - 3.95
229	11 A	40	R229	3.30 - 4.90
187	12	48	R187	3.95 - 5.85
159	13	58	R159	4.90 - 7.05
137	14	70	R137	5.85 - 8.20
102			R102	7.00 - 11.0
112	15	84	R112	7.05 - 10.0
90	16	100	R090	8.20 - 12.4
75	17	120	R075	10.0 - 15.0
67			R067	11.0 - 17.0
62	18	140	R062	12.4 - 18.0
51	19	180	R051	15.0 - 22.0
42	20	220	R042	18.0 - 26.5
34	21	260	R034	22.0 - 33.0
28	22	320	R028	26.5 - 40.0
22	23	400	R022	33.0 - 50.0

Top-Launched



Spectrum
Elektrotechnik GmbH

Spectrum Elektrotechnik GmbH, P.O.Box 450533, 80905 Munich, Germany

Phone: +49-89-3548-040, Fax: +49-89-3548-0490, www.spectrum-et.com

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.


For reprints please contact the Publisher.

an upper limit to the capacity gain of the network. By targeting the energy to a specific user, however, the energy efficiency of the network can be increased—this is referred to as “beamforming” and it is a key technology for both 5G FR1 and FR2 base stations.


IMPROVEMENT OF ENERGY EFFICIENCY WITH BEAMFORMING

In a traditional cellular network, a cell is associated with a base station that transmits energy throughout a wide area (typically 120 degrees angular arc in front of the base station). While some of this energy is received

by users within the base station’s cell, the vast majority of this energy is absorbed into the environment (buildings, people, trees, cars, etc.). This wasted power represents a reduced energy efficiency and higher network OPEX (see **Figure 5**). If the single base station antenna is replaced by 120 antennas that target the energy to individual users, the required base station power is decreased to 0.1 percent of the original output power.³ This reduction, however, is theoretical. Practically, the output power for the same capacity only decreases to 30 percent of the original power due to the efficiency and losses of the RF components inside the base station.

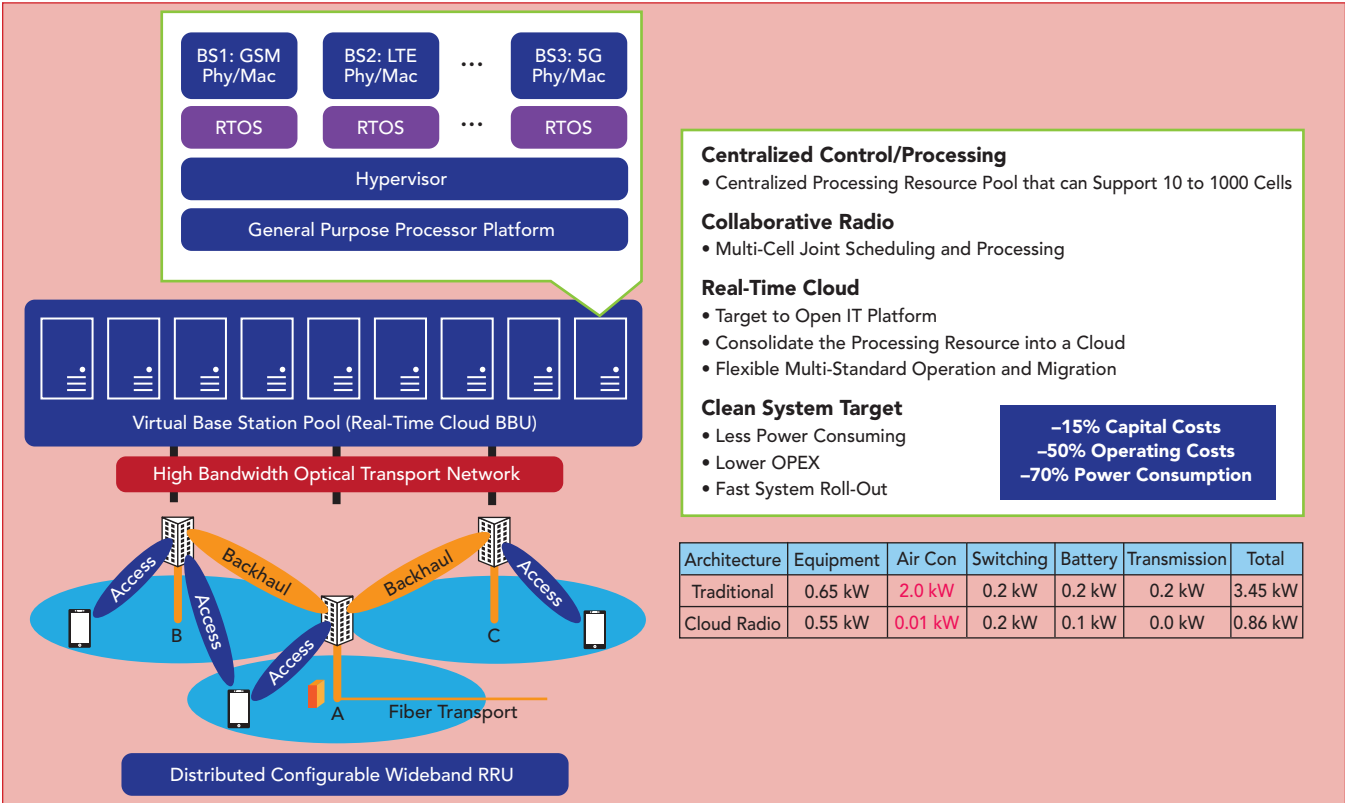

▲ Fig. 3 Centralized baseband processing.

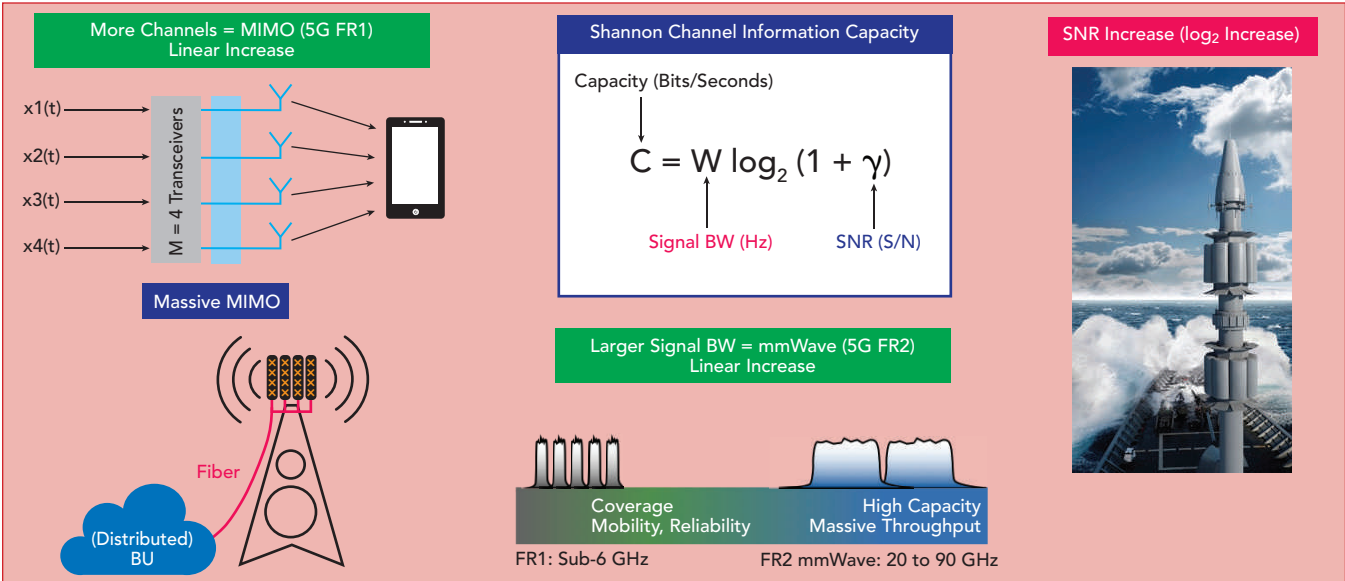

▲ Fig. 4 Spectral efficiency.





Ultra-Low Phase Noise OCXOs 10 and 100 MHz

MV389 10 MHz

Low Phase Noise Miniature OCXO with Low G-sensitivity

- ✓ Allan Deviation <5E-12 per sec.
- ✓ low G-sensitivity <6E-10/G (typical), options up to <3E-10/G
- ✓ package 25.8x25.8x12.7 mm

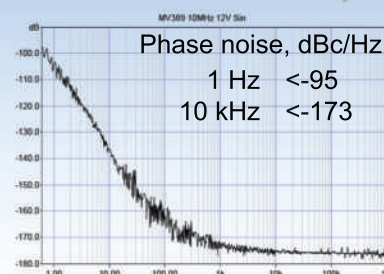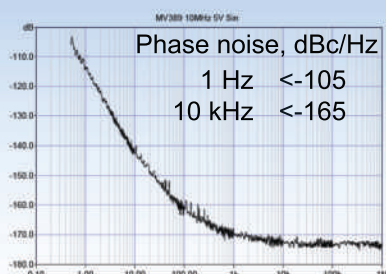

MV317 100 MHz

Miniature High Frequency Precision Low Phase Noise OCXO

- ✓ low G-sensitivity <1E-9/G (typical), options up to <2E-10/G
- ✓ package 25x25x10.3 mm




Phase noise (typical), dBc/Hz, for 100 MHz

10 Hz	-102
100 Hz	-135
1 kHz	-164
10 kHz	-185
100 kHz	-190

MV359 10 and 100 MHz

Ultra Low Noise Dual Frequency OCXO

- ✓ Allan Deviation 5E-13 per sec.
- ✓ temperature stability $\pm 1\text{E-}9$
- ✓ package 67x44x18 mm

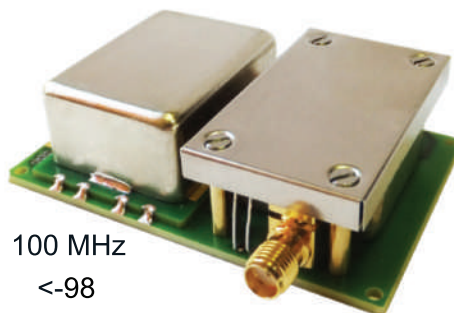

Phase noise, dBc/Hz, for	10 MHz	100 MHz
1 Hz	<-120	<-98
10 Hz	<-145	<-125
100 Hz	<-160	<-135
1 kHz	<-165	<-160
10 kHz	<-170	<-175
100 kHz	<-170	<-180



Splitter Combiner Unit

**K-band and
Ka-band
128-way or
64-way**



- 4-to-64 way
1-to-64 way,
8-to-128 way,
2-to-128 way,
or any combination
- Thermal Vacuum
- High Isolation
- Optional Integrated
Bias-T, LNA, LNB,
Filters, Switches

Parameter	Unit	Value
Uplink Frequency Band	GHz	26 to 32
Dowlink Frequency Band	GHz	18 to 24
Max Insertion Loss	dB	4 Downlink 5 Uplink
I/P & O/P VSWR		1.6:1
Gain Flatness	dB	1.0
Port to Port Variation	dB	1.0
Port to Port Isolation	dB	25



50 Intervale Road, Boonton, NJ 07005
Tel: 973-394-1719 • Fax: 973-394-1710

www.etiworld.com


SpecialReport

In order to form a beam, a set of periodically spaced antennas can form a beam in any direction by only changing the phase differences between the antennas (see **Figure 6**). Typical antenna array spacing is half wavelength, leaving the beam angle (θ) directly related to the phase difference between the antennas: $\theta \propto \sin^{-1}(\Delta\phi)$. While the beam can focus its energy in a desired direction, there is also energy going in other directions (sidelobes and backlobes). This additional energy represents interference to other users inside a base station cell. This effect can be mitigated by either ensuring the adjacent users are in the nulls of the main beam or by weighting the individual antennas with an amplitude distribution to lower the energy in the sidelobes (see Figure 6).

There are three types of beam-forming architecture that have di-

Improve Energy Efficiency: Beamforming

Traditional Base Station Antenna

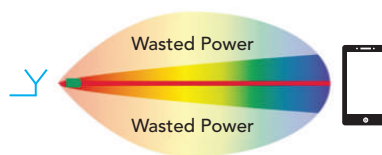

Number of Antennas = 1

Number of BS Transmit Antennas

1


Normalized Output Power of Antennas

$$P_{\text{ant}} = \frac{1}{M_t} = 1$$

Normalized Output Power of Base Station

$$P_{\text{total}} = \sum_{i=1}^{M_t} P_{i_{\text{ant}}} = 1$$

Massive MIMO Antenna Array

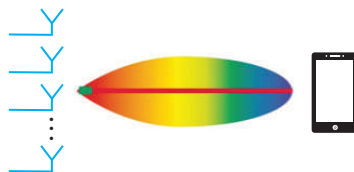

Number of UEs: 1
120 Antennas per UE

120

$$P_{\text{ant}} = \frac{1}{P_t^2}$$


$$P_{\text{total}} = \sum_{i=1}^{M_t} P_{i_{\text{ant}}} \sim 1/1000$$

Source: IEEE Signal Processing Magazine, Jan. 2013



▲ **Fig. 5** Beamforming and energy efficiency.

Principle of Beamforming & Beam Steering



1. Fixed Antenna Spacing d
2. Choose Direction θ
3. Set Phase Shifts $\Delta\phi$

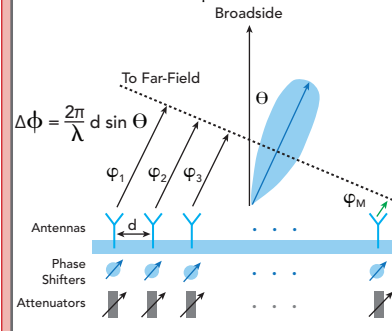

Beam Steering (Phase Shift)

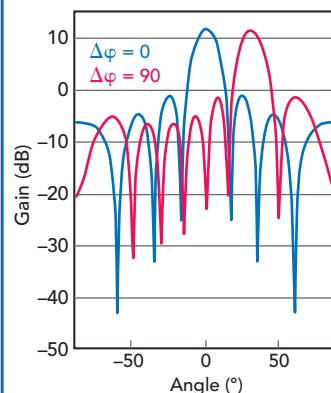

Sidelobe Suppression

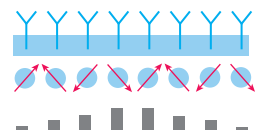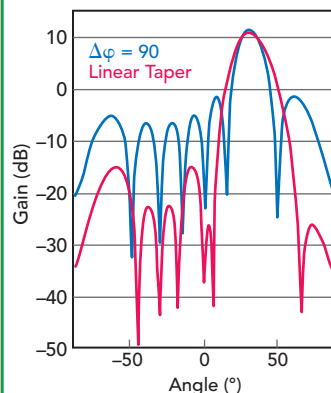

▲ **Fig. 6** Principles of beamforming.

Bringing Microwave & Millimeter-wave Products To Market

New Millimeter-wave Applications Drive Demand & Generate New Challenges:

Microwave and millimeter-wave applications beyond 6 GHz have garnered extensive interest in the last few years, largely due to growth in 5G cellular, micro-satellite constellations, millimeter-wave backhaul, radar, and Internet-of-Things (IoT) applications where increased bandwidth and reduced spectrum congestion are critical. Additional technology trends that embrace increased frequencies include active electronically steered arrays (AESA) for military radar, V-band automotive radar, and V-band/E-band backhaul.

5G and IoT wireless applications are moving to 20 ~ 60 GHz frequency bands to overcome atmospheric attenuation and enhance throughput in the millimeter-wave spectrum. Advanced active antenna systems (AAS) are being developed that incorporate beamforming, multi-input-multi-output (MIMO), and carrier aggregation (CA) technologies, requiring greatly advanced and complex antenna systems than previous cellular or wireless IoT.

All of these new technologies come with new challenges for industries that are traditionally familiar with sub-6 GHz technology. There is a new realm of expertise, equipment, and range of physical considerations for development of competitive technology that meets both customer and user requirements and expectations.



Manufacturing Success In The Millimeter-wave Era

Big Opportunity Means Big Stakes: Years of producing a 77GHz Frequency Converter Module, RFE's engagement with a large OEM led to the development of new Automotive Radar Test Systems with a complete range of capabilities with > 100 fielded systems achieving 100% satisfaction and reliability.

V-band Downconverter Woes: A U.S. based Radiometer provider faced obsolescence of an essential V-band downconverter that was the core of their product. Unable to source any viable replacement after more than a year of research and testing, provided RFE with a physical replica. RFE rapidly delivered a fully functional unit with updated synthesizers for backward compatibility, field replaceability, and enhancements to the K-band and V-band downconverters for reduced system drift.

Delivering Much-needed Expertise & Turn-key Manufacturing For Millimeter-wave Systems: RFE, formerly Spinnaker Microwave, has been offering products for challenging applications since 1991. With a complete design, manufacturing, quality control, tuning, and testing services capabilities, RFE enables companies without microwave and millimeter-wave capabilities to reach a growing market and bring high-demand products to awaiting customers.

Highlights

- Established product portfolio
- Custom designs & modifications of existing technology
- Re-engineering component or supplier obsolescence
- Low-Volume / Turnkey Manufacturing
- Agile and flexible second source manufacturer

Agency Compliance

- AS9100/ISO 9001:2015 (In process)
- ITAR Registered (M35461)
- Small Business Concern
- NAICS: 334419
- CAGE Code: 7AZJ1
- RoHS Compliant

Design & Manufacturing Capabilities

- 0.5 GHz to >90 GHz
- Frequency Converters/Receivers
- Oscillators/Synthesizers
- Radar Systems
- Custom/Specialty RF Assemblies
- Hi-Rel / Weatherproof designs)

Enabling Next-generation Millimeter-wave Device Manufacture: RFE's expertise and familiarity with a wide range of precision millimeter-wave systems results in end products that outperform industry competitors. RFE offers experience and expertise combined with turn-key manufacturing or A-la-carte manufacturing services to fill the gap in any millimeter-wave design or production cycle. See the examples below:



77 GHz FMCW Radar Warning Receiver: Today's automotive and transportation systems rely on high-reliability / high-performance radar. Target tracking, collision threat prediction, configurability and cost along are critical. In conjunction with Mobile Technology Solutions (MTS), RFE developed a 77 GHz frequency-modulated continuous wave (FMCW) radar system that exceeds the standards in the marketplace. With over 150 meters of range, RFE's automotive radar platform is unaffected by vehicle glass and a custom designed antenna/lens system eliminates the alignment issues common with strip-line configurations.



Broadband Fast Tuning Miniature Synthesizer: Microwave and millimeter-wave radar, radios, and instruments are built using frequency synthesizers. With more high frequency applications, synthesizers are now needed that exhibit wide bandwidth in smaller form factors than previous technologies. Predicting this emerging need, RFE has developed a broadband fast tuning miniature synthesizer that operates from 0.1 ~ 20 GHz with < 50µs tuning speed in a tiny 3 x 3 x 0.7" package with spurious content down to -60 dBc, phase noise below -65 dBc/Hz at 10 kHz and rugged operating temperature range of -45 to +85 deg C.




RFE

RFE's customers include commercial and industrial OEMs, as well as DoD contractors. If you require a design or manufacturing service that performs as designed, RFE can be your go-to manufacturing services provider. <http://rfe-mw.com/>

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.

For reprints please contact the Publisher.

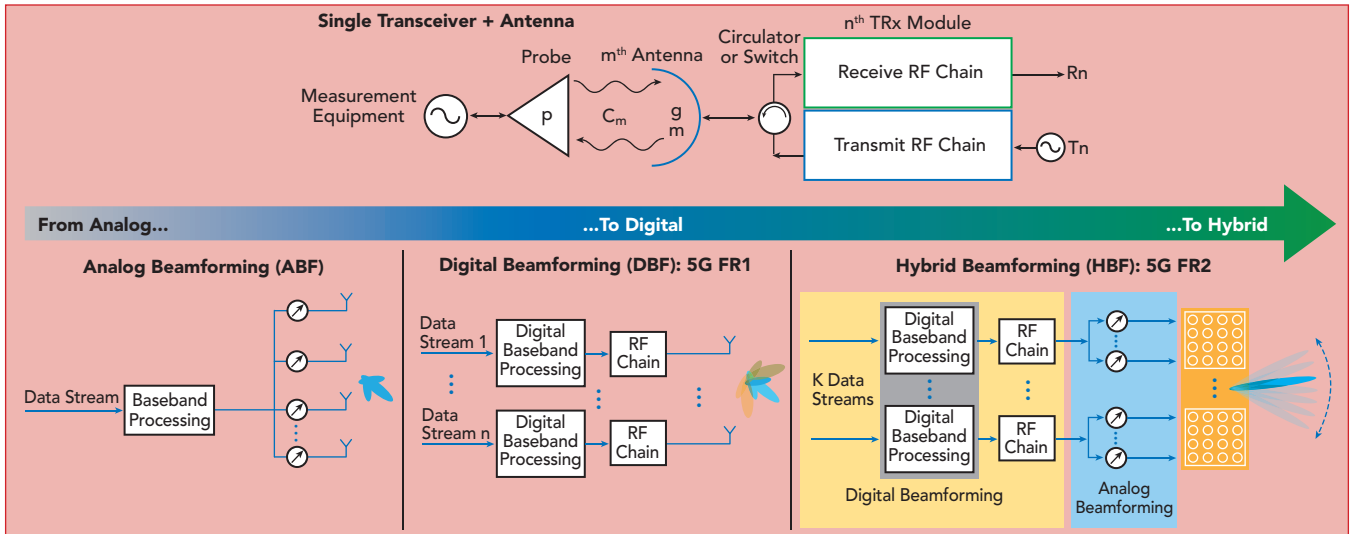

▲ Fig. 7 Beamforming architectures.

rect impact on the energy efficiency of the base station and the UE (see **Figure 7**):

- Analog Beamforming (ABF): The traditional way to form beams is to use attenuators and phase shifters as part of the analog RF circuit where a single data stream is divided into separate paths. The advantage of this method is that

there is only one RF chain (LNA, filters, switch/circulator) required. The disadvantage is the loss from the cascaded phase shifters at high power.


- Digital Beamforming (DBF): DBF assumes there is a separate RF chain for each antenna element. The beam is then “formed” by matrix-type operations in the baseband where artificial amplitude and phase weighting is performed. For frequencies lower than 7 GHz in 5G FR1, this is the preferred method since the RF chain components are comparatively inexpensive and can combine MIMO and beamforming into a single array. For frequencies of 28 GHz and above, the PAs and ADCs are very lossy for standard CMOS components. If exotic materials, such as GaAs and GaN are used, the losses decrease at the expense of higher cost.
- Hybrid Beamforming (HBF): HBF combines DBF with ABF in order to allow the flexibility of multiple radio transceivers plus beamforming while reducing the cost and losses of the beamforming unit (BFU). Each data stream has its own separate analog BFU with a set of M antennas. If there are N data streams, then there are N×M antennas. The analog BFU loss due to phase shifters can be mitigated by replacing the adaptive phase shifters with a selective beamformer such as a Butler matrix. One proposed architecture uses the digital BFU to steer the direction of the main beam while the analog BFU steers the beam within the digital envelop.

OPTIMAL NETWORKS: SPECTRAL AND ENERGY EFFICIENCY

The combination of C-RAN, MIMO, new spectrum and beamforming allows 5G to both increase capacity while decreasing costs compared to traditional and current cellular networks. The Shannon-Hartley theorem can be reformulated to take into account the energy efficiency of the channel.² Using the constraints in the performance of the base stations and the network, the joint optimal spectral-energy efficiency of 2G and 4G networks can be calculated at 4 bps/Hz for GSM and 8 bps/Hz for LTE. Note, in real networks, these values are often lower at 4 bps/Hz for LTE.

The combination of MIMO and digital beamforming in 5G FR1 can lead to an increase of capacity of over 3× compared to an LTE network while decreasing costs by a factor of 10 (assuming that there are eight transceivers per user with beamforming). While 5G FR1 has limited frequency spectrum available, 5G FR2 uses large amounts of spectrum above 24 GHz. The spectral efficiency of 5G FR2 (assuming HBF with eight transceivers per antenna array) is comparable to LTE at 10 bps/Hz, but with higher energy efficiency compared to LTE⁴ (see **Figure 8**).

In conclusion, the combination of spectral and energy efficiency allows operators to deploy new networks that can simultaneously boost capacity while lowering OPEX. Networks of the future will combine the different solutions of FR1 and FR2 into

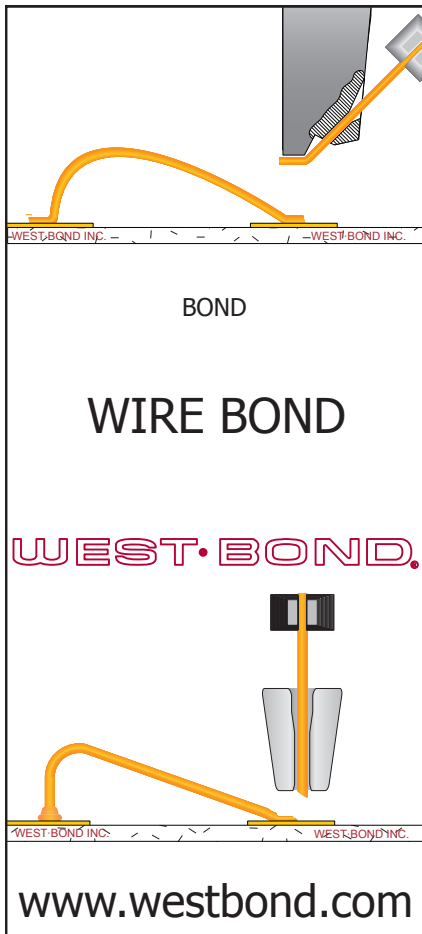

NEW

C29S Superbend Microwave & Millimeter Wave Cable Assemblies

Low Loss


Low VSWR

High Shielding Effectiveness


High Retention Force

Eliminates Need for Costly
Right Angle Connectors


Up to 50GHz

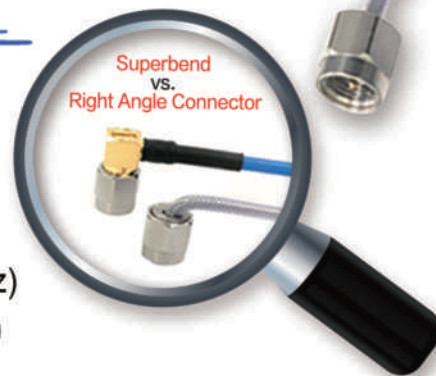


★ Connectors Available: SMA Male (26.5GHz)
2.92mm Male (40GHz)
2.4mm Male (50GHz)

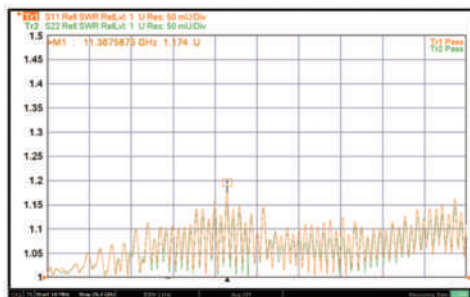

26.5GHz

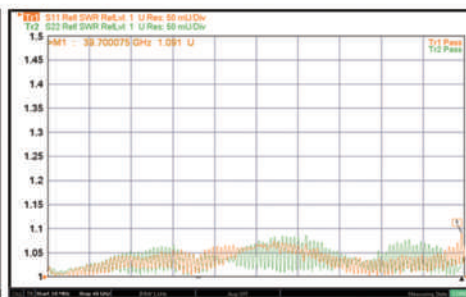

40GHz

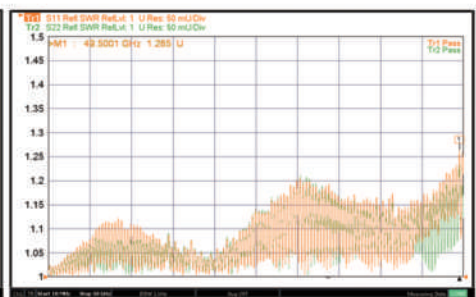

50GHz

More Information-
Scan the QR Code




Tel: +86-591-87382856

Fuzhou Micable Electronic Technology Co., Ltd.
Email: sales@micable.cn Website: www.micable.cn

affiliated with **SSI**
Cable Corp.

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.
For reprints please contact the Publisher.

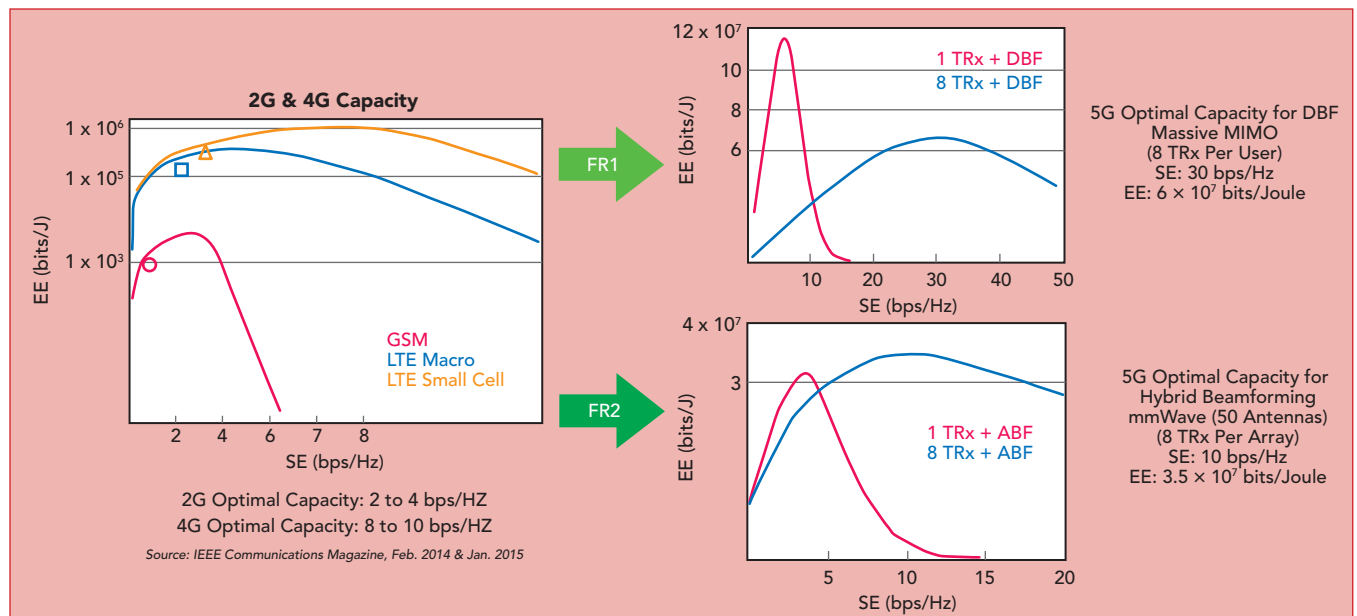

▲ **Fig. 8** Optimized networks: spectral and energy efficiency.

single networks, allowing the FR1 to deliver high data rates in a wide area network with in-building penetration while FR2 serves as data off-loading, hotspots and extreme network densification. This network deployment will not only affect consumers and equipment vendors, but also has a

fundamental impact on the entire test & measurement industry.

IMPACT ON TEST & MEASUREMENT INDUSTRY

The new base stations required for 5G result in a new measurement paradigm with the use of over-the-air (OTA)

testing for both antenna and transceiver performance characterization.

5G BASE STATION ARCHITECTURE

The combination of beamforming and MIMO into a single array leads to a massive MIMO base station as multiple sets of antennas are required for both beamforming (same data vector for each antenna) and MIMO (different data vectors for each set of beamforming antennas). Designing these base stations so that both spectral and energy efficiency can be increased is complex and requires very tight integration of all the components (see **Figure 9**):

- **Beamforming Architecture:** This depends on the availability of components both in terms of losses (energy efficiency) and cost.
- **Wideband Power Amplifier and Filter Banks:** The increase of the number of frequency bands, carrier aggregation across wide frequency bands will require large numbers of both filters and power amplifiers. The power amplifiers will require pre-distortion or exotic materials to operate at higher efficiencies.
- **Antenna Mutual Coupling:** Simply packing more antennas into a space will decrease the capacity and increase the losses in the base station.
- **Clock Synchronization:** For a large massive MIMO array, the clocks will

**Adapters, Connectors, Cable Assemblies
Bias Tees, RF Switches, Filters & Cal Kits**

Soontai® 5G & mmWave Test Solution

www.soontai.com www.soontai-tech.com
TEL: 886-6-2016969 E-mail: soontai@soontai.com



Planar Monolithics Industries, Inc.

Industry Leader in Log Video Amplifiers (DLVAs, ERDLVAs & SDLVAs)

PMI offers a variety of DLVAs, ERDLVAs & SDLVAs covering the 50 MHz to 40 GHz frequency range. PMI's Log Video Amplifiers offer high dynamic range along with excellent temperature stability. PMI offers many standard models with various options that are available at:

<https://www.pmi-rf.com/categories/dlvas-erdlvas-sdlvas>



DLVA-50M18D5G-40-LIN-LOG-CD-1 SDLVA-100M18G-CW-70-MAH SDLVA-2020-70-OPT.0518-A03-A07-50OHM SDLVA-1G20G-55-12-SFF SDLVA-218-65-16MV-12DBM ERDLVA-218-CW-LPD

PMI Model No.	Frequency Range (GHz)	TSS	Log Slope (mV/dB)	Dynamic Range Log (dBm)	Size (Inches) Connectors
DLVA-50M18D5G-40-LIN-LOG-CD-1 https://www.pmi-rf.com/product-details/dlva-50m18d5g-40-lin-log-cd-1	50 MHz - 18.5	-40 dBm	50 ± 5	-40 to 0	4.0" x 3.0" x 1.0" SMA (F)
SDLVA-100M18G-CW-70-MAH https://www.pmi-rf.com/product-details/sdlva-100m18g-cw-70-mah	0.1 - 18	-70 dBm	10 ± 1	-65 to +5	2.3" x 2.2" x 0.40" SMA (F)
SDLVA-2020-70 OPT.0518-A03-A07-50OHM https://www.pmi-rf.com/product-details/sdlva-2020-70-opt-0518-a03-a07-50ohm	0.5 - 18	-65 dBm	20 ± 10%	-65 to +5	3.0" x 3.5" x 0.5" SMA (F)
SDLVA-1G20G-55-12-SFF https://www.pmi-rf.com/product-details/sdlva-1g20g-55-12-sff SDLVA-1G20G-58-12-SFF https://www.pmi-rf.com/product-details/sdlva-1g20g-58-12-sff	1 - 20	-55 dBm -58 dBm	50	-55 to +5	1.08" x 0.71" x 0.29" SMA (F)
SDLVA-218-65-16MV-12DBM https://www.pmi-rf.com/product-details/sdlva-218-65-16mv-12dbm	2 - 18	-64 dBm	16 ± 2	-55 to +10	4.24" x 0.994" x 0.38" SMA (F)
ERDLVA-218-CW-LPD https://www.pmi-rf.com/product-details/erdlva-218-cw-lpd	2 - 18	-64 dBm	77 ± 5	-60 to +4	2.04" x 1.67" x 0.472" SMA (F)
SDLVA-2D5G4D9G-60-50MV https://www.pmi-rf.com/product-details/sdlva-2d5g4d9g-60-50mv	2.5 - 4.9	-70 dBm	50.5 ± 5%	-60 to 0	2.3" x 1.0" x 0.4" SMA (F)
DLVA-8G10G-75-50-SFF https://www.pmi-rf.com/product-details/dlva-8g10g-75-50-sff	8 - 10	-78 dBm	50 ± 4	-75 to 0	2.0" x 1.5" x 0.4" SMA (F)
SDLVA-8G18G-40-5-SFF https://www.pmi-rf.com/product-details/sdlva-8g18g-40-5-sff	8 - 18	-45 dBm	50 ± 6	-40 to 0	1.2" x 0.85" x 0.4" SMA (F)
DLVA-18G40G-42-50-CD-1 https://www.pmi-rf.com/product-details/dlva-18g40g-42-50-cd-1	18 - 40	-34 dBm	50	-32 to +10	1.86" x 1.69" x 0.4" 2.92mm (F)
SDLVA-18G40G-65-CD-292FF https://www.pmi-rf.com/product-details/sdlva-18g40g-65-cd-292ff	18 - 40	-65 dBm	25	-63 to +2	2.37" x 1.8" x 0.42" 2.92mm (F)



SDLVA-2D5G4D9G-60-50MV DLVA-8G10G-75-50-SFF SDLVA-8G18G-40-5-SFF DLVA-18G40G-42-50-CD-1 SDLVA-18G40G-65-CD-292FF



Walter E. Washington Convention Center,
801 Mt Vernon Place, NW, Washington DC 20001
March 9 to 12, 2020
Booth #: 2301
<https://www.pmi-rf.com/events/satellite-2020>



Bella Center, Center Boulevard 5,
2300, Copenhagen
March 15 to 20, 2020
Booth #: 08
<https://www.pmi-rf.com/events/eucap>



Dixie Crow Symposium 45 - 2020
Museum of Aviation at Robins AFB, Georgia
March 23 to 25, 2020
Booth #: TBD
<https://www.pmi-rf.com/events/dixie-crow-symposium-45-2020>

West Coast Operation:

4921 Robert J. Mathews Pkwy, Suite 1
El Dorado Hills, CA 95762 USA
Tel: 916-542-1401, Fax: 916-265-2597

East Coast Operation:

7311-F Grove Road
Frederick, MD 21704 USA
Tel: 301-662-5019, Fax: 301-662-1731

sales@pmi-rf.com - www.pmi-rf.com

For reprints please contact the Publisher.

ISSN 1548-1205 REGISTERED

Amplifiers - Solid State

Attenuators - Variable/
Programmable

Bi-Phase Modulators

Couplers (Quadrature, 180,
Directional)

Detectors - RF / Microwave

DLVAs, ERDLVAs & SDLVAs

Filters & Switched Filter
Banks

Form, Fit, Functional
Products & Services

Frequency Converters

Frequency Sources

Frequency Discriminators
& IFM

Frequency Synthesizers

Gain & Loss Equalizers

Integrated MIC/MMIC
Assemblies (IMAs)

IQ Vector Modulators

Limiters - RF / Microwave

Log Amps

Miscellaneous Products

Monopulse Comparators

Multifunction Integrated
Assemblies (IMAs)

Phase Shifters & Bi-Phase
Modulators

Power Dividers/Combiners
(Passive & Active)

Pulse Modulators - SP1T

Rack & Chassis Mount
Products

Receiver Front Ends &
Transceivers

Single Side Band
Modulators

SMT & QFN Products

Switch Matrices

Switch Filter Banks

Switches - Solid-State

Systems - Radar Sense &
Avoid


Systems - Fly Eye Radar

Threshold Detectors

USB Products



Content is copyright protected and provided for personal use only - not for reproduction or retransmission.

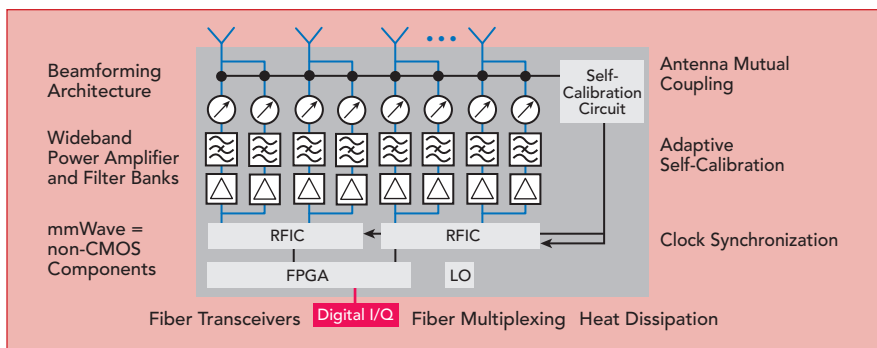

▲ Fig. 9 Massive MIMO architecture.

ACCOMPLISH YOUR MISSION WITH THE SMALLEST MOST COST EFFECTIVE CUSTOM RF/MICROWAVE FILTERS

Miniature SMT, Cavity Filters, available from 5.0 to 25 GHz

Nano, SMT Filters, 40 MHz to 6.0 GHz, in LC and Ceramic Topologies

Pico, SMT Filters, available from 5.0 GHz to 27 GHz

Miniature Filters, Mil-Std-202; compliant with RoHS or NON-RoHS options.

When an off-the-shelf filter could compromise your mission, call on the support of **3H Communication Systems**. 3H specializes in high-performance custom RF/microwave filter solutions from DC to 50GHz.

- Extensive experience with defense and prime contractors
- Cavity, Lumped Component and Ceramic topologies, connectorized and/or SMT formats; printed, suspended substrate, switch filter banks and multi-function assemblies
- **ISO9001:2015** certified facilities; 5-year product warranty



Talk to one of our engineers.
Call 949.529.1583 or visit
3HCommunicationSystems.com.

require synchronization over separate PCB boards. Clock drift will lead to uncertain phase changes (due to frequency drift) between the antennas and decrease the effect of beamforming.


- **Adaptive Self-Calibration:** Due to the large numbers of components, chipsets, clocks and amplifiers, together with the dependency of phase on temperature conditions inside the base station, the output phase at each antenna can vary significantly from the desired phase. Therefore, an adaptive self-calibrating circuit is required where the phase and amplitude offset of each signal is measured and is then pre-distorted so that optimal beamforming can be achieved.
- **Fiber Transceivers:** The output of the massive MIMO base station is typically baseband that is then transmitted through fiber to either a local baseband unit or into the C-RAN. Consequently, a real-time FPGA is required to translate the output baseband data from the RFIC to the baseband protocol for fiber.
- **Heat Dissipation:** The combination of up to hundreds of antennas, thousands of components and dozens of RFICs/FPGAs within a confined space leads to significant heat and thermal issues. As these units are deployed without externally provided air cooling in areas of large temperature variation, large heatsinks are required, significantly increasing the weight of the massive MIMO unit.

TEST & MEASUREMENT OF 5G BASE STATIONS AND DEVICES

Traditionally, the performance of a base station was measured by separating the antenna portion from the radio/RF portion. The modulated performance of the RF transceivers could be measured directly with cables between the RF test ports and the measurement instruments (i.e., vector signal analyzer and signal generators). The antenna performance was typically measured OTA using CW waveforms with a vector network analyzer.

Due to the highly integrated architecture of the massive MIMO base station, there is no longer direct access to the individual RF paths. This implies a fundamental

Enabling a New World of Ubiquitous Global SATCOM Connectivity

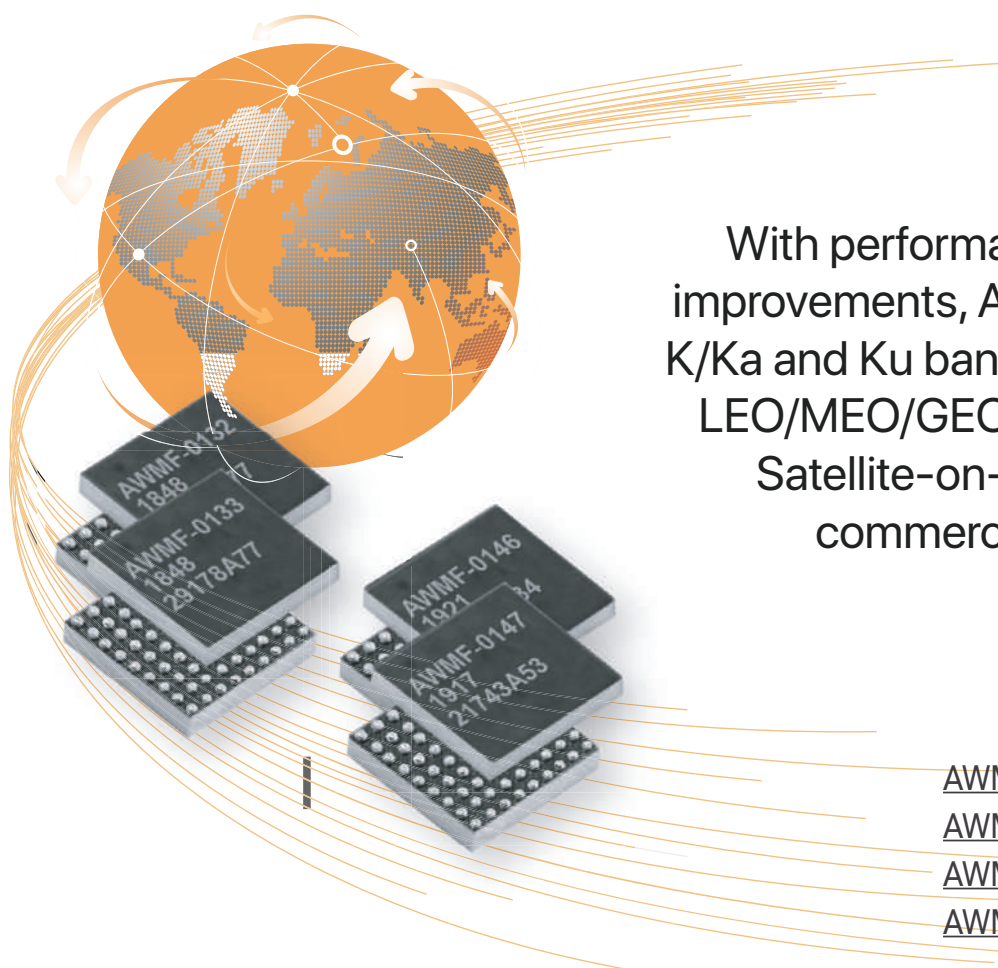


With performance and cost improvements, Anokiwave's new K/Ka and Ku band Core ICs make LEO/MEO/GEO SATCOM and Satellite-on-the-move a commercial reality

AWMF-0132: K-Rx SATCOM IC
AWMF-0133: Ka-Tx SATCOM IC
AWMF-0146: Ku-Rx SATCOM IC
AWMF-0147: Ku-Tx SATCOM IC

mmW
Silicon ICs

Intelligent Array
Solutions

mmW Algorithms
to Antennas

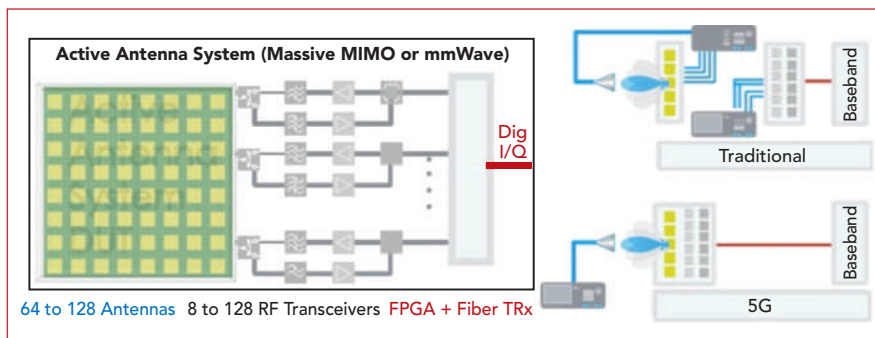

▲ Fig. 10 New measurement paradigm for 5G.



MilliBox™

MMWAVE RADIATION PATTERN TEST CHAMBER

FEATURES:

- Compact & Economical
- Modular design: 80-200cm far-field
- 18-95 GHz applications
- 2-axis 360° gimbal
- Open-source SW controller

APPLICATIONS:

- 5G (NR) mmWave
- 60GHz, 802.11ad, 802.11ay
- 77GHz automotive radar
- Misc mmWave designs







MILLI WAVE SILICON SOLUTIONS

Phone: +1 408 892 9595
 Email: millibox@milliwave.com
 Web: www.millibox.org

change of measurement philosophy by moving away from highly predictable cable measurements of the RF transceivers to a more chaotic environment consisting of OTA measurements (see **Figure 10**).

OTA measurements are significantly more complex than cable measurements due to the different physical properties of the radiated fields (see **Figure 11** (p. 98)) in the near-field and far-field regions of the device under test (DUT). Due to both the time and spatial-varying properties of the modulated signals, measurements must be performed in the far-field of the DUT (planar waves), resulting in either very large anechoic antenna chambers or indirect far field chambers such as the plane wave converter (PWC) or compact antenna test range (CATR). A CATR uses a reflector to convert a spherical wave to a planar wave distribution in the near field of the reflector and the PWC uses an array to generate a planar wave distribution in the near field of the array (see **Figure 12** (p. 98)).

Due to the elimination of RF test ports and the use of frequencies in the millimeter region, OTA will become an essential tool for characterizing the performance of not just the antenna arrays of an active antenna system of a massive MIMO array, but the internal transceivers as well. For this reason there will be a high demand for OTA chambers and measurement equipment to not only measure the strict radiative properties of antennas, but substituting traditional conducted transceiver measurements as well. Rohde & Schwarz, with its wide range of anechoic chambers and measurement equipment expertise, is well situated to deliver solutions even for future customer requirements.⁵

References

1. CMRI, "C-RAN: The Road Towards Green RAN," December 2013.
2. I. Chih Lin, C. Rowell et al., "Towards Green and Soft: A 5G Perspective," *IEEE Communications Magazine*, February 2014.
3. F. Rusek et al., "Scaling Up MIMO: Opportunities and Challenges with Very Large Arrays," *IEEE Signal Processing Magazine*, January 2013.
4. H. Shuangfeng et al., "Large Scale Antenna Systems with Hybrid Analog and Digital Beamforming for Millimeter Wave 5G," *IEEE Communications Magazine*, January 2015.
5. "Antenna Array Testing - Conducted and Over the Air: The Way to 5G," Rohde & Schwarz White Paper, 2016.

ACHIEVE FAST & ACCURATE DESIGNS

Reach your design goals quickly with
**Modelithics Advanced Models for
Smiths Interconnect attenuators and resistors!**


**Modelithics
Models
Are**


- Measurement-based
- Equivalent circuit models
- Thoroughly validated and documented

**Modelithics
Models
Offer**


- Substrate and pad scaling
- Part value scaling
- EM co-sim compatibility

Free 90-day trial of ALL Modelithics models
for Smiths Interconnect components!
www.Modelithics.com/MVP/SmithsInterconnect

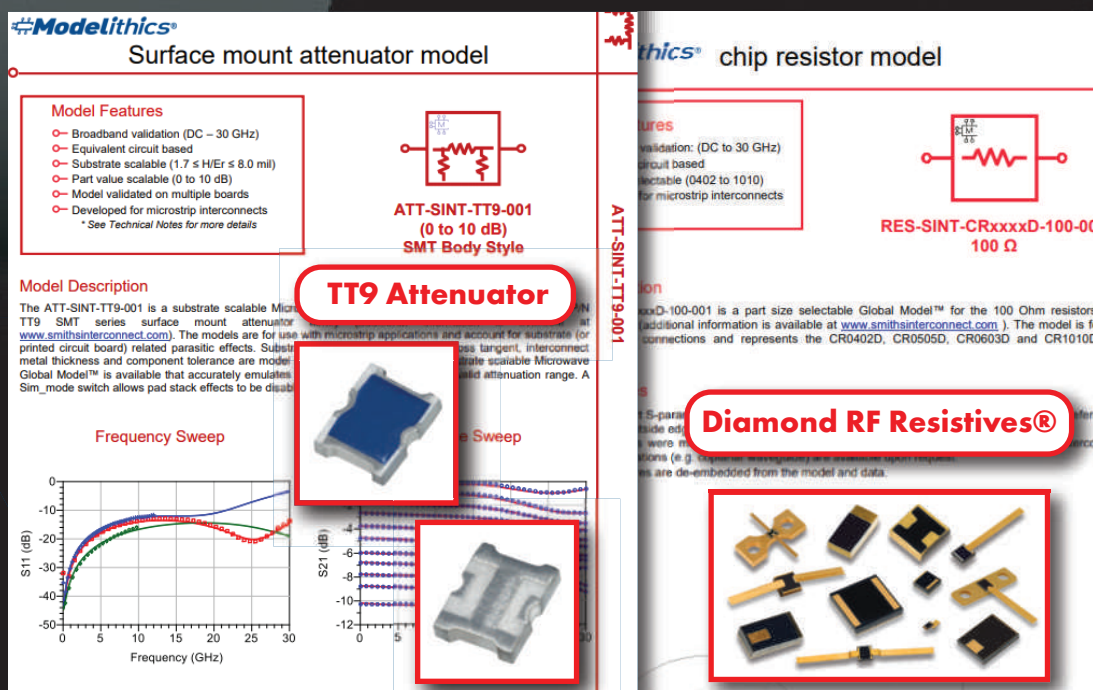

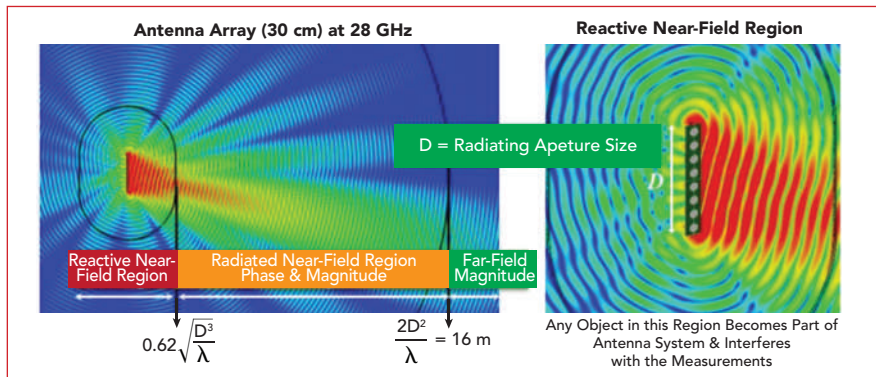


▲ Fig. 11 Antenna electromagnetic fields.



Temperature Variable Attenuators

TVAs from the recognized leader in high reliability resistive components offer:

- Two case sizes:
0.150" x 0.125" x 0.018" (to 6 GHz)
0.075" x 0.065" x 0.018" (to 18 GHz)
- Three TCA values: -0.003, -0.007, and -0.009 dB/dB/°C
- Enhanced slope ETVAs with a TCA value of -0.005 dB/dB/°C
- Attenuation values from 1-10 dB
- Solderable or wire bondable terminations

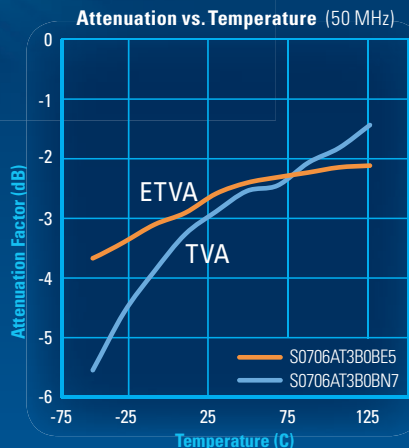

When the mission is critical, choose *State of the Art*.



State of the Art, Inc.

RESISTIVE PRODUCTS

www.resistor.com *Made in the USA.*

2470 Fox Hill Road, State College, PA 16803-1797
Phone: 800-458-3401 or 814-355-8004 • Fax: 814-355-2714
E-mail: sales@resistor.com • Source code: 56235

QUALIFICATIONS ISO9001 & AS9100 • MIL-PRF-55342 • MIL-PRF-32159 • MIL-PRF-914

Passive Measurements

2D/3D Antenna Characterization



R&S®AMS32 OTA Performance Measurement Software

R&S®CONTEST



R&S®ZNA Vector Network Analyzer

Active Measurements

RF Transceiver Characterization



R&S®AMS32 OTA Performance Measurement Software

R&S®CONTEST




R&S®SMW200A Vector Signal Generator



R&S®FSW Signal and Spectrum Analyzer

OTA Test Solutions



R&S®PWC200 Plane Wave Converter



R&S®ATS1800 CATR Conformance Chamber System



R&S®ATS800 CATR Rack Based Antenna Test System

▲ Fig. 12 Plane wave converter and CATR.

Low Noise **BYPASS AMPLIFIERS**



1 MHz   **GHz**

- ▶ Built-in bypass    
- ▶ Noise figure as low as 1.1 dB
- ▶ Ultra-wide bandwidths with flat gain



5G: Crossing the Dreaded Trough of Disillusionment to the Plateau of Productivity

Sarah Yost
National Instruments, Austin, Texas

In 2019, 5G went mainstream. The first commercial deployments were rolled out, and mobile users in select markets began to get the first taste of 5G technology. Looking at the Gartner Hype Cycle (see **Figure 1**), 5G is at the peak of inflated

expectations and should reach a plateau of productivity in two to five years. After the peak of inflated expectations, a period of disillusionment is anticipated, and it seems 5G will be no exception. The promises that 5G made cover numerous applications with numerous technological challenges. The first 3GPP release to cover 5G, release 15, only covered a small subset of the technology needed to fully realize the key performance indicators (KPI) of 5G: enhanced mobile broadband (eMBB), massive machine type communications (mMTC) and ultra-reliable low latency communications (URLLC). Release 15 focuses primarily on eMBB; only the subsequent releases will address mMTC and URLLC, with substantial work to complete these efforts.

5G PHASE 2

When 5G was first defined, there was a recognition that it was more complex and ambitious than previous generations, and development was split into two phases. The first phase, corresponding to release 15, was intended to address a subset of features for the first commercial deployments in 2019. The second phase, release



▲ **Fig. 1** Gartner Hype Cycle, August 2019. Source: Gartner.



RELCOMM
TECHNOLOGIES, INC.

A Leading Provider of RF Coaxial Relays

RelComm Technologies, Inc. designs and builds
RF relay component products for the
communications and instrumentation marketplace....

EXCELLENCE BY DESIGN

Design Enhanced Application Specific RF Coaxial Relays

Military Defense Fixed/Mobile/Shipboard

Commercial Telecommunications Infrastructure

Satellite Communications Ground Stations

Test and Measurement Instrumentation from DC to 40 GHz



**RF
Relay
Store**

www.rfrelaystore.com

The RF Relay Store provides the most convenient, dependable and cost effective way to procure small quantities of RF coaxial relays.

RelComm Technologies now makes available standard building block part types for shipment from stock.


RF Coaxial Relays - Extremely low loss from DC to 18GHz.
1P1T, 1P2T, 2P2T, Transfer, and Multi-Throw.
PCB Mount, SMA, and N-Type Connectorized

RelComm Technologies, Inc. - 610 Beam Street, Salisbury, MD 21801

P: (410) 749-4488 - F: (410) 860-2327 - www.relcommtech.com - sales@relcommtech.com

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.

For reprints please contact the Publisher.

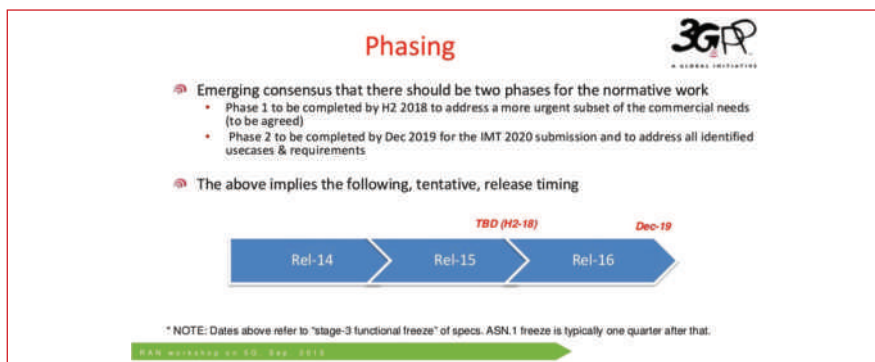

▲ Fig. 2 5G phased plan. Source: 3GPP.

16, was intended to be a follow up to "address all identified usecases (sic) and requirements," according to a 2015 3GPP RAN document (see **Figure 2**). Trying to address all additional uses cases in release 16 has proven to be unrealistic; features and use cases are being pushed into release 17 and beyond.

Some of the topics that release 16 is addressing include integrated access and backhaul, side link enhancements for V2X, and New Radio Unlicensed (NR-U). Some of the topics that have been pushed for consideration in release 17 include non-terrestrial networks, positioning enhancements and spectrum above 52.6 GHz. Completing study items and work items for mmWave frequencies above 52.6 GHz is one of the noticeable technologies pushed into future releases, compared to the plan several years ago. The reason for this is that mmWave is hard. It is hard from a technology perspective to address the challenges with building and testing mmWave products that function indoors, outdoors and while moving. It is hard from a business perspective to create the right financial models for deploying this expensive new technology.

PUSHING HIGHER AND HIGHER

Much work remains to make mmWave successful for large commercial deployments. Yet, there is a desire from some in the research community to continue exploring how and if higher frequencies can be used for wireless communications. The 3GPP has only documented plans to look into frequencies at 114 GHz and below, but frequencies around 140 and 300 GHz—even up to 1 THz—are being explored, technology that is likely 10 years or more from commercialization. These higher frequencies have some unique properties because of their shorter wavelengths compared to lower frequency mmWave signals. For example, THz signals can be used for sensing applications like air quality detection or to implement touchless gestures for interacting with machines. There are even wider swaths of bandwidth available in the THz range, so much higher data rates are theoretically

KOAXIS.com

RF Cable Assemblies

Semi-rigid Design Guide



**Quicker and more
cost-effective assemblies
are as easy as 1-2-3-4-5-6**

download the guide at koaxis.com

while you're there...

Build It *visually build a cable assembly*
See It *get a specification instantly*
Buy It *online using eCommerce*




Made in the USA

+1 (610) 222-0154


Vector Signals at the touch of a button

TETRA ($\pi/4$ DQPSK)

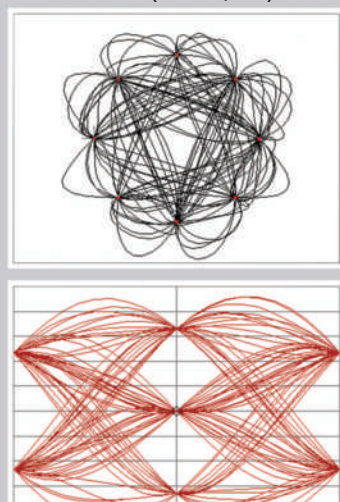


QAM256 (6 Msps, 2.45 GHz)


EVM	= 1.0329	Scrms
Mag Err	= 731.63	dBm
Phase Err	= 1.1274	deg
Freq Err	= -190.12	Hz
IQ Offset	= -42.161	dB
Quad Skew	= 931.56	ns
SNR (BER)	= 35.429	dB
Gain Ind	= 0.047	dB



GSM (CPM, 1.932 GHz)



ATSC-DTV (8VSB, 695 MHz)



Pricing (U.S. list)

SG392 (2 GHz) ... \$5,400

SG394 (4 GHz) ... \$6,600

SG396 (6 GHz) ... \$8,400




- 2 GHz, 4 GHz & 6 GHz models
- Dual baseband arb generators
- Vector & analog modulation
- I/Q modulation inputs (300 MHz RF BW)
- ASK, FSK, MSK, PSK, QAM, VSB & custom I/Q
- Presets for GSM, EDGE, W-CDMA, APCO-25, DECT, NADC, PDC, ATSC-DTV & TETRA
- GPIB, RS-232 & Ethernet interfaces

The SG390 Series **Vector Signal Generators** — taking communications testing to a new level.

The SG390 series has outstanding features and performance: complete vector and analog modulation, dual baseband arb generators, I/Q inputs with 300 MHz RF bandwidth, low phase noise, and an OCXO timebase are all included.

We've also made communications testing quick and easy — everything is available from the front panel of your instrument. Pulse shaping filters, TDMA gating signals, additive white noise, and event markers are all there. Use the built-in pattern or PRBS generators to create data, or upload your own symbol data. Map your symbols to any constellation and transmit at rates up to 6 Msps — it's that simple.

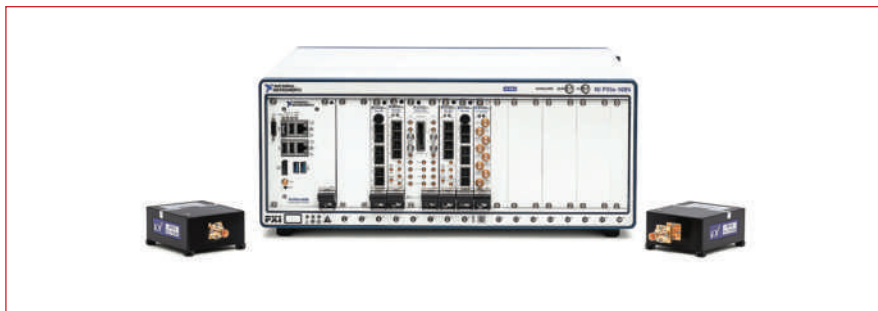


▲ **Fig. 3** Combining a mmWave transceiver with extenders enables measurements from 110 to 170 GHz.

Powerful Payload & RF Link Emulator



600 MHz bandwidth

- ◆ **Link emulation: Delay, Doppler, AWGN, Phase shift**
- ◆ **Real time control for Aerial Vehicle (UAV) testing**
- ◆ **Payload: MUX, Compression, Phase noise, Group delay**
- ◆ **Multipath: 12 paths per channel**
- ◆ **Up to sixteen synchronous channels with correlation**

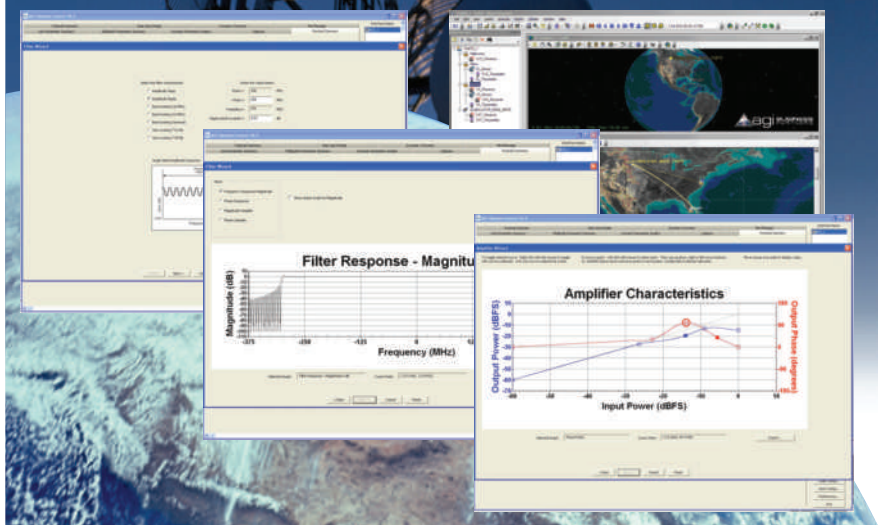

RF Test Equipment for Wireless Communications

email: info@dbmcorp.com

DBM Corp, Inc

32A Spruce Street ◆ Oakland, NJ 07436

Tel (201) 677-0008 ◆ Fax (201) 677-9444

www.dbmcorp.com

possible. With wavelengths smaller than 1 mm, using THz frequencies for location and positioning could provide centimeter accuracy.


These are promising aspects of THz technology, but there are challenges as well. Transceivers covering these frequency ranges are expensive, and there are few products on the market. **Figure 3** shows one example of hardware that is available to enable THz research: a software-defined testbed comprised of the mmWave Transceiver System (MTS) from National Instruments (NI) with up- and down-converters, or frequency extenders, from Virginia Diodes (VDI). Another challenge for THz is the significant signal loss, which is even greater than at mmWave frequencies. The distances for which THz communications will be useful needs to be assessed, in addition to how these signals behave in different channel environments. Limited channel models exist today, and more measurements are needed to create robust models. As THz research is at a similar phase as mmWave technology 10 to 15 years ago, it seems clear that THz will not be included in 5G, while it is a promising candidate for 6G.

LOOKING FORWARD

Over the next five years, with any luck, 5G will move beyond the dreaded trough of disillusionment and into the plateau of productivity. For this to happen, mmWave research must continue. Beam tracking algorithms will improve. Chipsets will become more widely available and prices will begin to drop. As mmWave technology becomes more affordable, more researchers will have access to higher frequency equipment and applications like mmWave massive MIMO can be more widely explored. Breakthroughs in THz equipment, for research, commercialization and test, will also be needed to bring the technology out of research and solidify it as a 6G technology.

The next five years will be full of advancements in wireless communications. The list of use cases and applications 5G can support will expand, and the technologies that will shape 6G will become clearer. ■

IN AN EMERGENCY- REDUCE NETWORK DOWNTIME

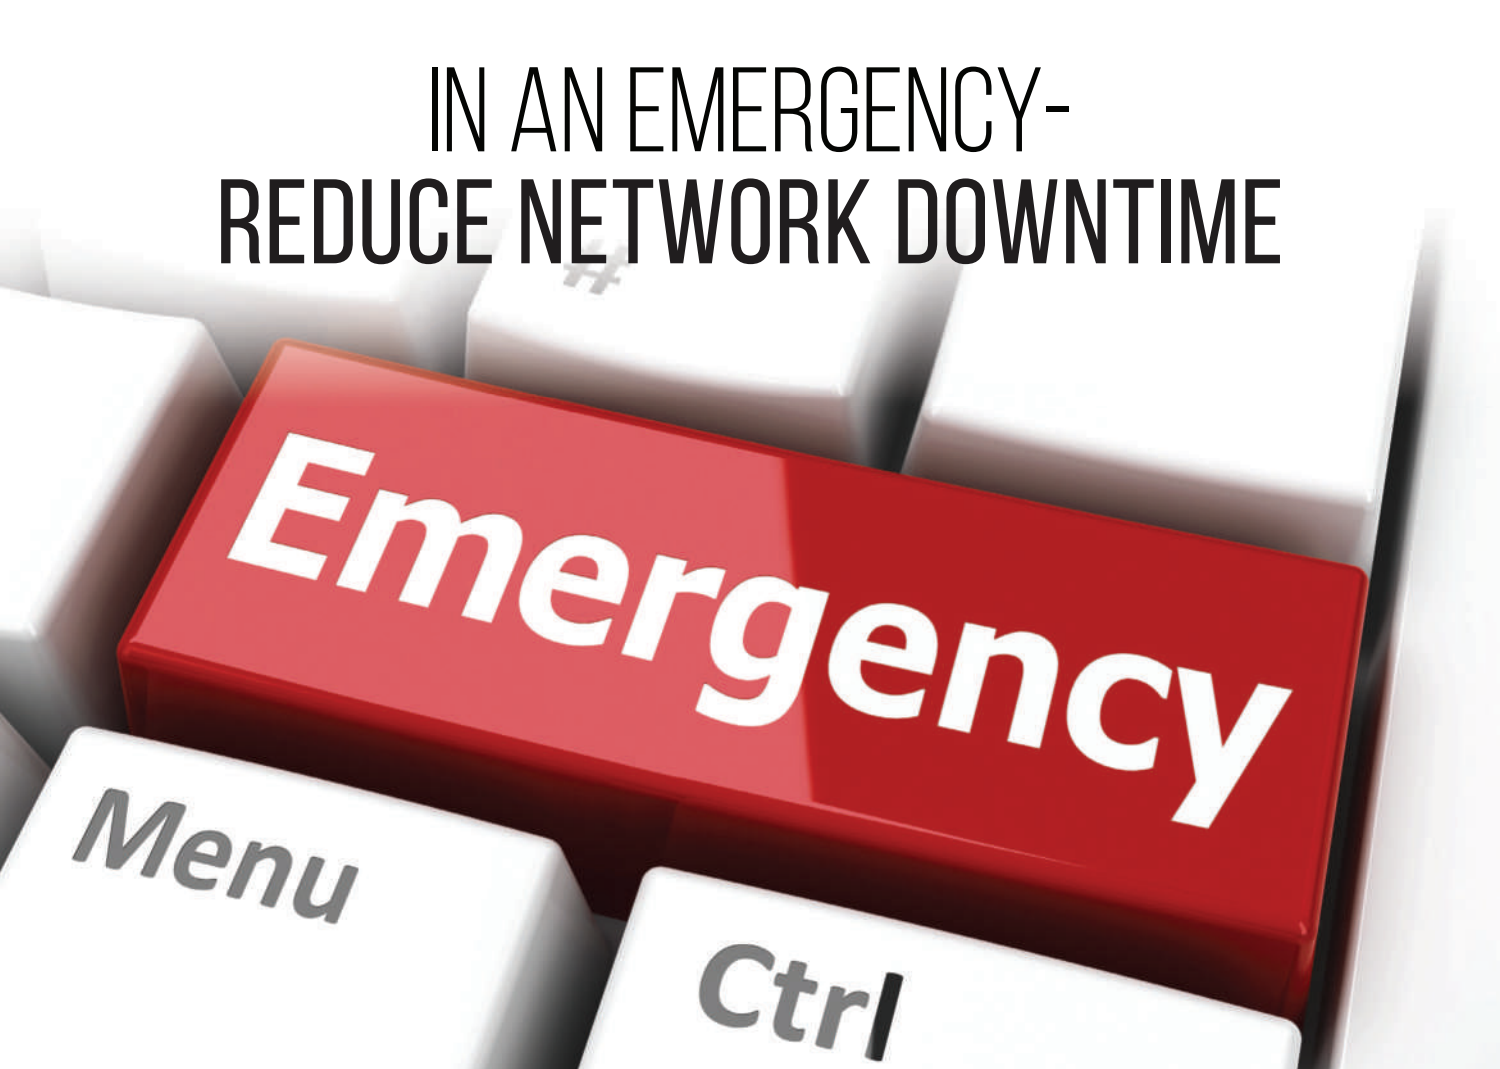

Emergency

Quality RF and Data Line Surge Protection Products Available for Same-Day Shipping!



COUNT ON POLYPHASER

PolyPhaser is on Standby Readiness to Support Your Network

- Quality RF and data line surge protection products available for online purchase
- Reliable surge solutions in stock for same-day shipping
- 24/7 live customer support
- Nationwide engineering support to deliver the right technology for your network
- More than 40 years of expertise in mission critical communications




When network reliability is a requirement, count on PolyPhaser! Contact PolyPhaser online at www.polyphaser.com or directly at +1 (208) 635-6400.

PolyPhaser
an INFINIT® brand

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.

For reprints please contact the Publisher.

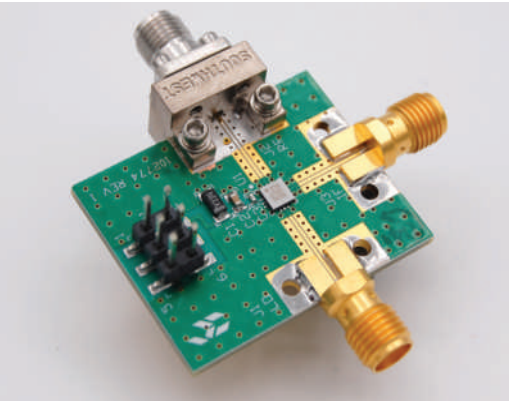

Ku- and Ka-Band Subharmonic Mixers Improve System Performance

Custom MMIC
Chelmsford, Mass.



Since enabling the superheterodyne receiver some 100 years ago, mixers have been a constant in RF/microwave systems, while the circuit topologies and technologies used to build them have been constantly optimized to improve performance, shrink size and reduce

cost. The most common topology has been the fundamental mixer, where the mixing generates IF frequencies at the sum and difference of the RF and local oscillator (LO) frequencies, i.e., $f_{LO} + f_{RF}$ and $f_{LO} - f_{RF}$ if $f_{LO} > f_{RF}$. The LO signal is typically much higher in power than that of the RF signal since the

TABLE 1				
SUBHARMONIC MIXER PERFORMANCE				
Parameter	Unit	CMD303	CMD310	CMD310C3
RF Frequency	GHz	13 to 21	20 to 32	20 to 32
LO Frequency	GHz	6.5 to 10.5	10 to 16	10 to 16
IF Frequency	GHz	DC to 3	DC to 7	DC to 6
Minimum LO Drive	dBm	0	−4	−2
Conversion Loss	dB	8.5	9.5	8.5
2LO to RF Isolation	dB	28	36	33
2LO to IF Isolation	dB	48	53	60
Input IP3	dBm	12	10	11

L to K Band Ultra-Wideband Voltage Controlled Oscillators

Model Number	Frequency	Phase Noise @ 10 kHz offset	Phase Noise @ 100 kHz offset	Tuning Voltage	Output Power
	(GHz)	(dBc/Hz)	(dBc/Hz)	(V)	(dBm)
DCO100200-5	1 - 2	-95	-117	0 - 24	+1
DCYS100200-12	1 - 2	-105	-125	0 - 28	+4
DCO200400-5	2 - 4	-90	-110	0 - 18	-2
DCYS200400P-5	2 - 4	-93	-115	0 - 18	0
DCO300600-5	3 - 6	-75	-104	0 - 16	-3
DCYS300600P-5	3 - 6	-78	-109	0 - 16	+2
DCO400800-5	4 - 8	-75	-98	0 - 15	-4
DCO5001000-5	5 - 10	-80	-106	0 - 18	-2
DCYS6001200-5	6 - 12	-70	-94	0 - 15	> +10
DCYS8001600-5	8 - 16	-68	-93	0 - 15	> +10
DCYS10002000-5	10 - 20	-65	-91	0 - 18	> +10

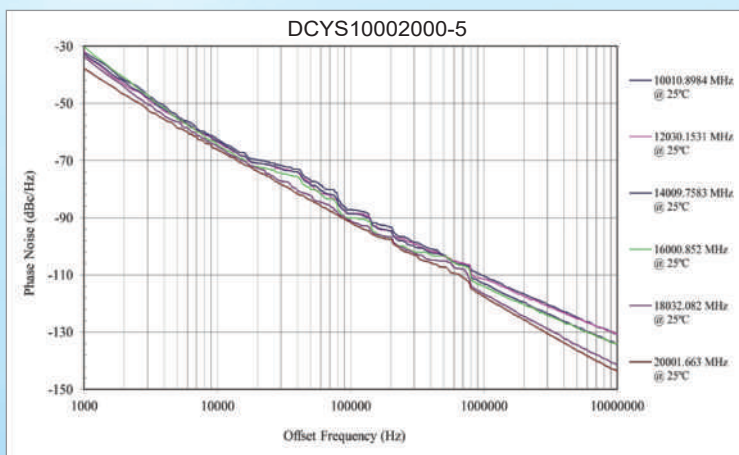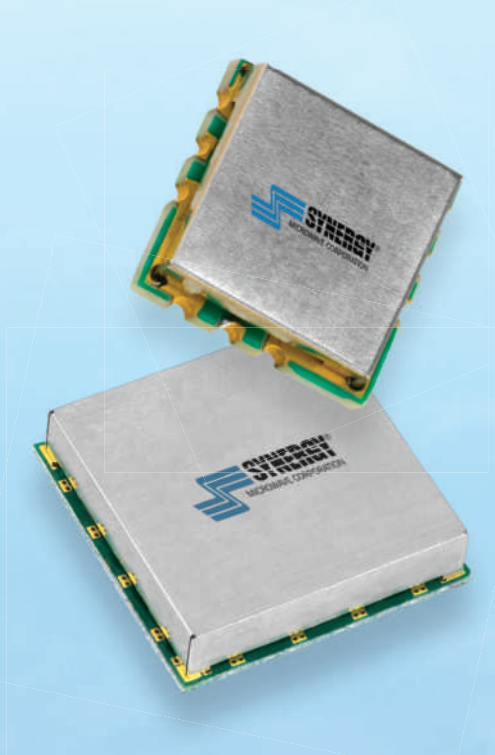

Features:

- > Superior Phase Noise
- > High Output Power
- > Small Size Surface Mount Package
- > Vcc: 5 volts
- > Future models up to 30 GHz

Talk To Us About Your Custom Requirements.



Phone: (973) 881-8800 | Fax: (973) 881-8361

E-mail: sales@synergymwave.com | Web: www.synergymwave.com

Mail: 201 McLean Boulevard, Paterson, NJ 07504

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.
For reprints please contact the Publisher.

ProductFeature

LO is used to turn on the diodes and drive the mixing process. In a practical mixer, unwanted signals such as LO and RF leakage and spurs will appear at the IF port. One of the challenges faced by system designers is minimizing these unwanted signals to achieve the spurious-free dynamic range required by the system.

A fundamental mixer is an efficient solution at lower frequencies,

where it is relatively easy to generate a low phase noise LO signal. At higher frequencies—say above 15 GHz—generating such a signal can be difficult and expensive, which makes fundamental mixers a non-optimal choice in many applications. One alternative is to generate the LO at half the required frequency and use a $\times 2$ multiplier to double the frequency. A passive multiplier topology is one approach, although

it can be quite lossy and require a buffer amplifier at the output to increase the LO power. Alternatively, an active multiplier topology will provide higher output power, although it requires DC bias and may still require an output buffer amplifier. Whether passive or active, a discrete multiplier topology requires additional components between the LO source and the mixer, increasing circuit complexity and consuming additional board area.

Custom MMIC has developed an elegant solution to this problem by releasing three GaAs MMIC subhar-



**NORDEN
MILLIMETER**

**LOOK TO NORDEN FOR YOUR
MICROWAVE TRANSCEIVERS**

*Norden Millimeter
is proud to introduce the NUDC2-18/1.3-2.3 Wideband
Microwave Transceiver in a low-SWaP 3U module.*

The NUDC2-18/1.3-2.3 is a dual conversion Transceiver providing 2-18 GHz operation in a versatile OpenVPX platform. The NUDC2-18/1.3-2.3 includes internal LOs which provide an instantaneous IF bandwidth of 1 GHz and exceptional Noise Figure: Down Converter NF= 6dB max, Up Converter NF=15dB max. Both the RF and IF paths include variable attenuation. The NUDC2-18/1.3-2.3 is digitally controlled by RS-485.

*State of the Art Millimeter Wave and Microwave
Products with custom development available.
That is what you receive from Norden Millimeter.
Contact Norden today.*

(530) 642-9123 Ext.1#
SALES@NORDENGROUP.COM
WWW.NORDENGROUP.COM

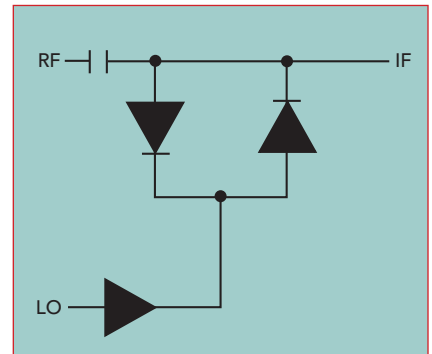


Fig. 1 Simplified block diagram of the Custom MMIC subharmonic mixer.

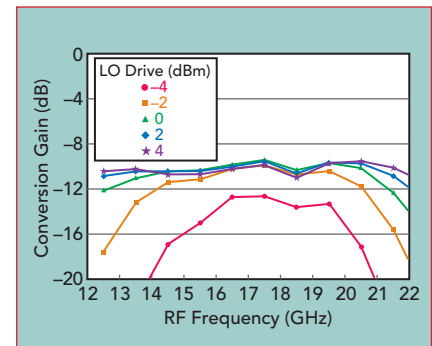


Fig. 2 Conversion gain vs. RF frequency and LO drive for the CMD303 used as an up-converter.


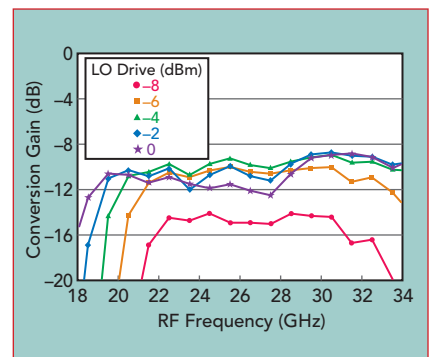


Fig. 3 Conversion gain vs. RF frequency and LO drive for the CMD310 used as an up-converter.

RF-LAMBDA

THE POWER BEYOND EXPECTATIONS

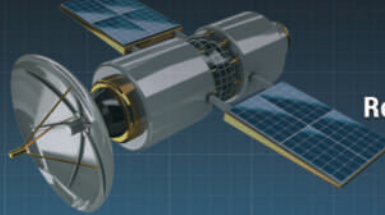

ITAR & ISO9000
Registered Manufacture
Made in USA




RF T/R MODULE UP TO 70GHz

DREAM? WE REALIZED IT

LOW LOSS **NO MORE CONNECTOR**
GaN, GaAs SiGe **DIE BASED BONDING**
SIZE AND **WEIGHT REDUCTION 90%**

HERMETICALLY SEALED
AIRBORNE APPLICATION

SATCOM TR MODULE RX 50GHz TX 22GHz

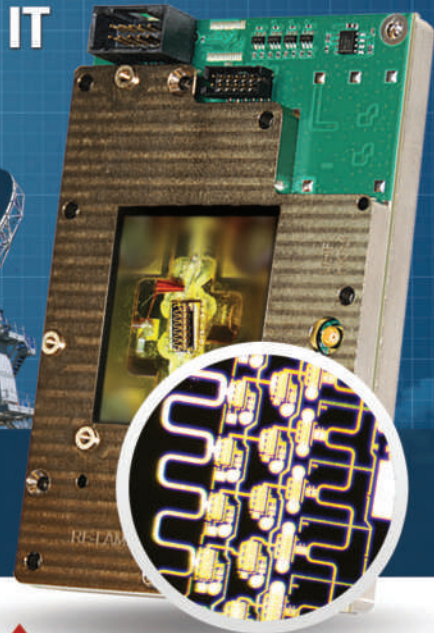

TX/RX MODULE Connectorized Solution

RF RECEIVER

DC-67GHz
RF Limiter

0.05-50GHz LNA
PN: RLNA00M50GA

RF Mixer

OUTPUT

RF TRANSMITTER

RF Switch 67GHz
RFSP8TA series

RF Filter Bank

0.01- 22G 8W PA
PN: RFLUPA01G22GA

0.1-40GHz
Digital Phase Shifter
Attenuator
PN: RFDAT0040G5A

LO SECTION

Oscillator

RF Mixer

INPUT

www.rflambda.com
sales@rflambda.com

1-888-976-8880

1-972-767-5998

San Diego, CA, US

Plano, TX, US

Ottawa, ONT, Canada

Frankfurt, Germany

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.
For reprints please contact the Publisher.

monic mixers, the first in a new family, which can be used as down-converters in a receiver or up-converters in a transmit chain. In Custom MMIC's designs, the LO is input at half the desired LO frequency and an anti-parallel diode pair creates the desired effect of mixing at twice the provided LO frequency (see **Figure 1**). The integrated buffer amplifier also reduces the required input LO power considerably below that

needed to drive a passive fundamental mixer. Another benefit of a subharmonic mixer is high rejection of the even LO harmonics at the RF and IF output ports (i.e., $2f_{LO}$, $4f_{LO}$, etc.), which reduces the required LO filtering.

Fabricated with GaAs MMIC technology, Custom MMIC's subharmonic mixers are a new MMIC category for the company. Two of the three mixers are available as die,

with RF frequency ranges covering 13 to 21 GHz (CMD303) and 20 to 32 GHz (CMD310); the latter design is also available in a ceramic 3 mm × 3 mm QFN package (CMD310C3). The performance of the three products is summarized in **Table 1**. All operate from a single supply voltage, nominally +3 to +4 V, and typically require approximately 30 mA.

Figure 2 shows the conversion loss performance of the CMD303 used as an up-converter. Over the specified RF frequency range of 13 to 21 GHz, the conversion loss is approximately 10 dB with LO drive at or above the rated minimum of 0 dBm. Similar performance is achieved with the higher frequency CMD310 used as an up-converter (see **Figure 3**). Across the specified RF frequency range of 20 to 32 GHz, the conversion loss is approximately 10 dB with the LO drive at or above -4 dBm.

These highly integrated GaAs subharmonic mixers only require external bypass capacitors to achieve the performance shown on the datasheet, making them easy to design in and minimizing circuit area. The die versions are rated for operation from -55°C to +85°C, while the packaged version is rated from -40°C to +85°C. Mixer performance is stable with temperature variation, with conversion loss changing less than 1 dB over the full operating temperature range.

In addition to these subharmonic mixers, Custom MMIC offers products for the entire RF signal chain—from the CMD283C3 low noise amplifier with 0.6 dB noise figure to the CMD304 DC to 67 GHz distributed amplifier. Constantly developing products to meet tough technical requirements, Custom MMIC introduced 39 high performance GaAs and GaN MMICs in 2019, a record for the company.

Read more about Custom MMIC's history and capabilities in the Fabs and Labs profile published in the June 2019 issue of *Microwave Journal*.

VENDORVIEW
Custom MMIC
Chelmsford, Mass.
www.custommmic.com

All in a day's work

ProtoMat® Benchtop PCB Prototyping Machine

What would your day look like tomorrow if you could cut yourself free from the board house and produce true, industrial quality microwave circuits on any substrate right at your desk? LPKF's ProtoMat benchtop prototyping systems are helping thousands of microwave engineers around the world take their development time from days and weeks to minutes and hours. In today's race to market, it's like having a time machine.

www.lpkfusa.com/pcb
1-800-345-LPKF

"You can't beat an LPKF system for prototyping. We do up to three iterations of a design within a day."

LPKF ProtoMat User

LPKF
Laser & Electronics

MILLIMETER WAVE **MMIC** PRODUCTS


MULTI-OCTAVE BANDWIDTHS

Up to 43.5 GHz

Amplifiers | Attenuators | Couplers | Equalizers

Mixers | Multipliers | Reflectionless Filters

Splitter/Combiners

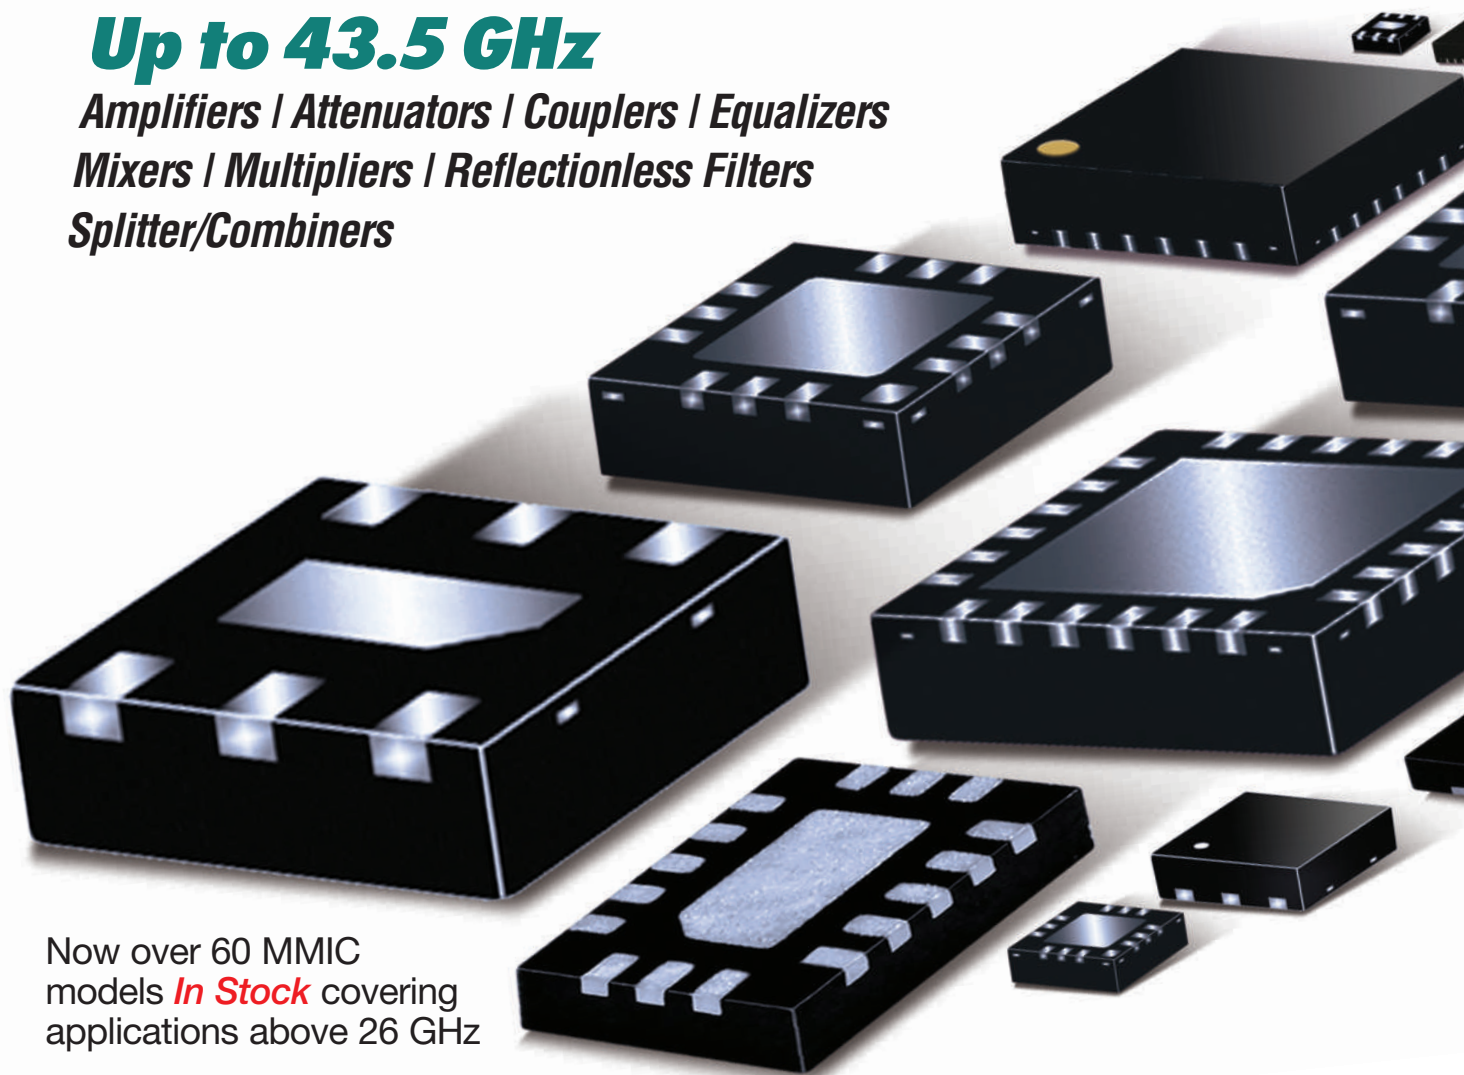

Now over 60 MMIC
models **In Stock** covering
applications above 26 GHz

Available in Plastic SMT & Unpackaged Die



Content is copyright (c) 2014 Mini-Circuits Corporation. All rights reserved. This document is provided for personal use only, not for reproduction or retransmission. For reprints please contact the Publisher. 605 Rev A_P





≥ 300 W Rack-Mount TWTAs Cover 2 to 6 and 6 to 18 GHz

dB Control offers two rack-mount traveling wave tube amplifiers (TWTA) for electronic warfare simulation, RFI testing and other applications requiring 300 to 325 W power in the 2 to 18 GHz range. The dB-4345 TWTA provides 325 W CW output power with 55 dB minimum gain across 2 to 6 GHz, and the companion dB-4311M covers 6 to 18 GHz, providing 300 W CW output with 55 dB minimum gain. Using a wide-band, periodic permanent magnet focused, conduction-cooled TWT, the amplifiers support CW and constant envelope, AM, FM and pulse-modulated signals. The TWTA power supply is a low noise, high efficiency design that minimizes any

interference to the RF signal path. Both models operate from single phase, 220 VAC power, although the prime power can be customized.

Each TWTA has an embedded microcontroller with an Ethernet interface for control and protection. However, the fault diagnostics and status indicators are integrated in the amplifiers, so outside controllers and interconnect cabling are not required. The TWTAs can be configured with standard or custom interface protocols rather than Ethernet. Another available option is RF gain control.

Established in 1990, dB Control designs and manufactures reliable, high-power TWTAs, microwave

power modules, transmitters, high voltage power supplies and modulators for radar, electronic countermeasures and datalinks. The company also performs contract manufacturing and repair depot services from its 40,000 sq. ft. facility, including transformer winding and testing, full vacuum encapsulation, pressure cure and conformal coating. A subsidiary of HEICO Corp., dB Control specializes in mission-critical—often sole-source—products to military organizations, defense contractors and commercial manufacturers.

dB Control Corp.
Fremont, Calif.
www.dBcontrol.com
info@dBControl.com


GA PWAVES

5G is run on antennas. We hold the key

Faster, further, less costly and more sustainable.

At Gapwaves we've already made genuine breakthroughs with antenna solutions for 5G mmWave base stations, microwave radios and automotive radars. Together we can discover what Gapwaves unique waveguide technology can mean for your business today, and your vision for 5G.

Visit us at Mobile World Congress
Hall 1, Stand 1 B100

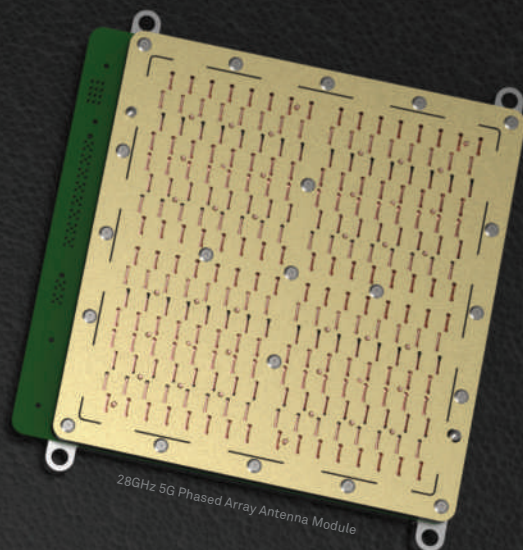

Extending the range of 5G mmWave
Enabling excellent coverage, high data rates and rapid network deployment by using low loss, highly efficient waveguide antennas with market leading EIRP.



Improving the power efficiency
Reducing the complexity and power consumption with as much as 50% by using low loss waveguide technology, enabling efficient sub-arraying, routing and passive pattern shaping.

24
GHz

Solving out-of-band suppression
Efficient use of all 5G mmWave bands by integration of low loss high performance filters efficiently cutting unwanted emission into satellite bands.



Increasing the uplink performance
Significantly increasing the receiver antenna gain by using low loss, highly efficient sub-arrayed waveguide antennas.

SIX DAYS ■ THREE CONFERENCES ■ TWO FORUMS ■ ONE EXHIBITION

SUBMIT YOUR PAPER ONLINE

EUROPEAN MICROWAVE WEEK 2020

To electronically submit a technical paper for one or more of the three conferences, all you have to do is:

1. Log on to www.eumweek.com
2. Click on 'Conferences' to view the individual conference details
3. Click on 'Paper Submission' for author's instructions on how to submit a summary

**EUROPEAN
MICROWAVE WEEK**
JAARBEURS UTRECHT
THE NETHERLANDS
13-18 SEPTEMBER 2020
www.eumweek.com

EuMA

European Microwave Association

Official Publication:



Organised by:



Supported by:



Co-sponsored by:



Co-sponsored by:



The 15th European Microwave Integrated Circuits Conference

Co-sponsored by:



The 50th European Microwave Conference

Co-sponsored by:



The 17th European Radar Conference

Co-sponsored by:



Submit summaries online by 14th February 2020 at www.eumweek.com

For reprints please contact the Publisher.



CommAgility has a new reference platform for LTE mobile device or user equipment (UE), enhanced its existing LTE eNodeB platform and released a new graphical LTE Management Tool. The reference platforms provide an integrated, fully tested solution combining CommAgility processing hardware and 3GPP LTE software, delivering a low-cost starting point for system development and deployment useful for 4G/5G researchers, product developers and LTE network engineers. The new platforms help build LTE solutions, particularly private and custom networks, reducing the time to market and lowering development cost. To support system deployment, CommAgility can provide fully customized hardware and software for the particular LTE or 5G application.

Platforms Speed 4G/5G/ Network Development

As an example, LTE is well-suited to SATCOM, with low-cost equipment available due to economies of scale, mission-critical traffic handling and the end-to-end security built into the 3GPP specifications. 5G satellite applications are already being studied while the standard is evolving, with requirements such as delivery optimization and high availability being considered. However, developers creating satellite communications systems must extend beyond the LTE standard or early 5G specifications, which requires flexible hardware and expertise with the physical layer (PHY) and protocol stack, for which these new platforms are ideal.

CommAgility's industry-leading LTE PHY and stack software is provided in binary format, including the recently-announced 3GPP Re-

lease 15 version of the SmallCell-STACK protocol stack. The LTE Management Tool provides an easy-to-use graphical user interface, which enables straightforward system evaluation, configuration and monitoring. The CA-D8A4-RF4 UE reference platform provides a high performance LTE UE with up to 300 Mbps download and four integrated transceiver channels supporting any frequency between 410 MHz and 6 GHz. The platform's software-defined ability to alternatively function as an LTE eNodeB or UE with different software and firmware loads highlights its flexibility.

CommAgility, A Wireless Telecom Group Company
Loughborough, U.K.
www.commagility.com/products/systems/lte-ref-ue



Catch up on the latest industry news with the bi-weekly video update **Frequency Matters** from Microwave Journal @ www.microwavejournal.com/frequencymatters



Frequency Matters.

Sponsored By  **Boonton**


Pillars of 5G:
Spectral & Energy
Efficiency

5G: Crossing the Dreaded
Trough of Disillusionment to
the Plateau of Productivity

Breaking Down mmWave
Barriers with Holographic
Beamforming

Dielectric Resonator
Antenna Arrays for 5G
Wireless Communications

SOLVING THE 5G mmWAVE PROBLEM



LEARNING CENTER

Presented by: 

Webinars

Five Things you Need to Know about OTA Chambers for 5G NR mmW Testing

Sponsored by:  **ROHDE & SCHWARZ**
Make ideas real

Presented by: Günter Pfeifer, Product Manager OTA,
Rohde & Schwarz Munich

www.microwavejournal.com/events/1928

Addressing Instability in Wide Bandwidth High Power Amplifiers

Sponsored by:  **NATIONAL
INSTRUMENTS™**

Presented by: Dr. Dominic Fitzpatrick, Head of Amplifier
Development, AMETEK-CTS

microwavejournal.com/events/1913

Smart Jammer / DRFM Testing – Test and Measurement Solutions for the Next Level

Sponsored by:  **ROHDE & SCHWARZ**
Make ideas real

Presented by: Yassen Mikhailov, Aerospace & Defence
Market Segment Manager, Rohde & Schwarz

microwavejournal.com/events/1910

4G and 5G Wireless Radio Examples using the Zynq UltraScale+ RFSoc

Sponsored by:  **XILINX®**

Presented by: David Brubaker, Senior Product Line
Manager, Zynq UltraScale+ RF SoCs

microwavejournal.com/events/1911



Register to attend at mwjournal.com/webinars

FEATURED



Books

mwjournal.com/ebooks

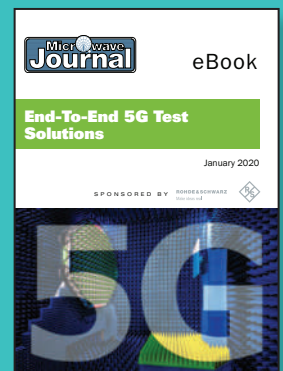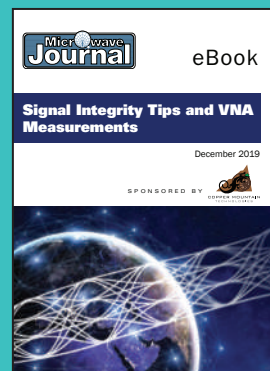


Content is copyright protected and provided for personal use only - not for reproduction or retransmission.
For reprints please contact the Publisher.

Software and Mobile Apps

COMSOL Multiphysics® v5.5

COMSOL announces the latest version of its COMSOL Multiphysics® software. In version 5.5, the Design Module provides an entirely new sketching tool for easier creation and more versatile parametric control of geometry models. New and updated solvers speed up a wide range of simulations. Two new add-on products, the Porous Media Flow Module and the Metal Processing Module, further expand the product suite's multiphysics modeling power.


COMSOL
www.comsol.com/



RF Tool App VENDORVIEW

The "RF Tools" app is useful not only for customers but also to sales people, engineers and technicians. It shows the relation between RF specific values like impedance, wavelength, return loss (VSWR) and signal delay, including their conversion. On top of this, the app includes the RF cable assembly calculator which allows an easy comparison of up to three out of more than 320 HUBER+SUHNER RF cables. The iPhone app is available for free in English and Chinese.


HUBER+SUHNER
www.hubersuhner.com/en/services/apps



On-Line Filter Synthesis Tool

K&L Microwave's Filter Wizard® filter synthesis and selection tool streamlines identification of filter products meeting customer specifications across a large portion of K&L's standard product offerings. Filter Wizard® accelerates user progress from specification to RFQ for RF and microwave filters spanning an ever-increasing range of response types, bandwidths and unloaded Q values. Provide the application with your desired specifications, and the software will return a list of products that match, placing response graphs, outline drawings and downloadable S-parameters at your fingertips. Visit their website to get started today.

K&L Microwave
www.klfilterwizard.com



MCL Microwave Calculator App

The MCL Microwave Calculator, developed by Mini-Circuits, performs 21 calculations commonly needed by RF and microwave system designers in a wide range of applications. Quickly compute the effect of VSWR or return loss on transmitted power; cascaded gain and noise figure for up to five amplifier stages; and power-to-voltage conversion. It is the perfect tool to help you solve problems and save time, whether you are working in the lab or in the field.

Mini-Circuits
www.minicircuits.com/applications/microwave_calculator.html



COMPLETE+3D Library™ v19.6 VENDORVIEW

Modelithics has released Version 19.6 of the Modelithics COMPLETE+3D Library for use with ANSYS HFSS. The update adds 117 full-wave 3D electromagnetic models to a large selection of highly scalable models for capacitor, inductor and resistor families from many popular suppliers, with an expanding collection of Modelithics' 3D geometry models for Coilcraft and TDK inductors and a connector model for SV Microwave. Through the MVP Program, free model use for 90 days is sponsored by Coilcraft, TDK and Würth Elektronik; 30-day trials are offered by Exxelia, Vishay and Knowles for the DLI and Syfer models.


Modelithics Inc.
www.modelithics.com/



sNpViewer to Assist 5G and RF Measurements

pSemi Corp. (formerly Peregrine Semiconductor), a Murata company, is offering the industry free beta software for viewing S-parameters. The pSemi sNpViewer allows for in-depth S-parameter viewing graphically. This comprehensive viewer includes Smith, polar, magnitude, phase and phase vs. amplitude charting. Time-domain analysis is also available. The pSemi sNpViewer allows you to perform searches through thousands of S-parameter files to determine and record optimal performance. The LUT feature can be especially useful for 5G beamforming or for any other device where a phase and/or amplitude LUT is required.

pSemi Corp.
www.psemi.com/snviewer



SIX DAYS ■ THREE CONFERENCES ■ TWO FORUMS ■ ONE EXHIBITION

EUROPE'S PREMIER MICROWAVE, RF, WIRELESS AND RADAR EVENT

The European Microwave Exhibition (15th - 17th September 2020)

- 10,000 sqm of gross exhibition space
- Around 5,000 attendees
- 1,700 - 2,000 Conference delegates
- In excess of 300 international exhibitors
(including Asia and US as well as Europe)

EUROPEAN
MICROWAVE **WEEK**
JAARBEURS UTRECHT
THE NETHERLANDS
13-18 SEPTEMBER 2020
www.eumweek.com

INTERESTED IN EXHIBITING?

For International Sales:
Richard Vaughan,
International Sales Manager
E: rvaughan@horizonhouse.co.uk
Tel: +44 20 7596 8742

or visit www.eumweek.com



NEW PRODUCTS

FOR MORE NEW PRODUCTS, VISIT WWW.MWJOURNAL.COM/BUYERSGUIDE
FEATURING **VENDORVIEW** STOREFRONTS

COMPONENTS

Resistive Power Divider



BroadWave Technologies unveiled a new resistive power divider featuring an operating frequency range of DC to 6 GHz. Model

152-215-002 is a 50 Ω , 2-way power divider. This unit has an average power rating of 2 W with 1.5:1 max VSWR. The insertion loss is 6 dB $\pm$ 1.5 dB nominal, the operating temperature range is 0°C to +70°C and RF connectors are N female. BroadWave Technologies manufactures a wide variety of resistive power dividers in 2-, 3-, 4-, 5-, 6- and 8-way configurations.

BroadWave Technologies Inc.
www.broadwavetechnologies.com

Wideband Double Balanced Mixers



Custom MMIC continues the rapid expansion of its standard product portfolio with three new additions to its GaAs MMIC mixer portfolio. The CMD312, CMD313

and CMD253 are wideband GaAs double balanced mixers, operating from 4 to 28, 6 to 45 and 6 to 14 GHz, respectively. These new MMICs are intended to support emerging wide bandwidth applications in test equipment, instrumentation, aerospace and defense. All three mixers feature low conversion gain and high isolation performance.

Custom MMIC
www.CustomMMIC.com

RF Surge Protectors



Fairview Microwave Inc., an Infinite Electronics brand, has unveiled a new line of coaxial surge protectors created to guard valuable communications equipment from power

surges and indirect lightning strikes. Fairview's new RF surge protectors are offered with either male-to-female or male-to-male 4.3-10 connectors. This product line features low insertion loss, max input power as high as 500 W and multi-strike capability.

Fairview Microwave Inc.
www.fairviewmicrowave.com

Dual Directional Coupler




KRYTAR announced the continued expansion of its line of dual directional couplers with the addition of a new

model offering 10 dB of coupling over the broadband frequency range of 10 to 46 GHz, in a single, compact and lightweight package. KRYTAR's new dual directional coupler expands the family of superior performance products offering ultra-broadband coverage in compact packages. Model 510046010 is a multi-purpose, stripline design that exhibits excellent coupling over the 10 to 46 GHz frequency band.

KRYTAR Inc.
www.krytar.com

IQ Mixers



Marki Microwave introduced three new IQ mixers. The MMIQ-0218H offers an impressive 2 to 18 GHz RF/LO, DC to 3 GHz IF, IIP3 of +25 dBm and is also available in L-diode. The MMIQ-1040S has a 10 to 40 GHz bandwidth, DC to 12 GHz IF, IIP3 of +27 dBm and is also offered in L-diode. The MMIQ-1865S is an 18 to 65 GHz

mmWave IQ mixer with a wide DC to 23 GHz IF, IIP3 of +27 dBm and available in L-diode and H-diode as well.

Marki Microwave Inc.
www.markimicrowave.com

26 to 34 GHz mmWave 2-Way Power Divider



MECA expanded offering of 5G mmWave products. Featuring 2-way power dividers covering 26 to 34 GHz with 2.92 mm interfaces. Typical specifications of

1.3:1 VSWR, 22 dB isolation, 1.5 dB insertion loss and 0.4 dB amplitude balance. Also available are attenuators, terminations, bias tees, DC blocks and adapters. Additionally octave and multi-octave models covering up to 50 GHz built by J-Standard certified assemblers and technicians. Made in U.S. and 36-month warranty.

MECA Electronics
www.e-meca.com

18 to 40 GHz Ultra-Wideband & High Precision Programmable Attenuators



Mitron has developed ultra-wideband and high precision programmable attenuator covering 18 to 40 GHz. The

user can control the attenuation via USB and Ethernet with 0.1 dB step, 50 dB attenuation dynamic range, 0.2 dB attenuation accuracy over whole band. Custom designs are available over 0.5 to 40 GHz frequency range, 50 to 120 dB dynamic range. Built-in AC-DC power module with small size 227 x 114 x 50 mm. It can support DLLs.

MiCable
www.mitron.cn

Comprehensive 5G Solution Portfolio



Pasternack, an Infinite Electronics brand, announced a comprehensive portfolio of 5G RF solutions serving the urgent needs of engineers and technicians around the

world with high-grade RF components and cable assemblies shipped same-day to support 5G innovation, testing and deployments. The "RF Components for the Next Generation" suite is comprised of thousands of active, passive, interconnect and antenna products supporting global sub-6 GHz and mmWave frequency band applications.

Pasternack
www.pasternack.com

Bi-Phase Modulator



PMI Model No. BPM-2640-180-292FF is a bi-phase modulator operating over the 26 to 40 GHz frequency range. This model offers insertion loss of 8 dB typical while maintaining a typical amplitude balance of $\pm$ 4 dB, VSWR of 2:1 typ., 3:1 max,

switching speed of 100 ns max, phase variation of $\pm$ 40° typ. and power handling up to 20 dBm operational. Compact housing measures 1 x 1 x 0.5 in. and has 2.92 mm female connectors.

Planar Monolithics Industries Inc.
www.pmi-rf.com

REGISTRATION NOW OPEN



2020

Electronic Design **Innovation** Conference

电子设计**创新**大会

May 13-14, 2020

China National Convention Center, Beijing, China

GO TO EDICONCHINA.COM TO REGISTER

- ▶ 5G/Advanced Communications
- ▶ mmWave Technologies
- ▶ Amplifier Design
- ▶ EMC/EMI
- ▶ Low Power RF and IoT
- ▶ Front End Design
- ▶ Power Integrity
- ▶ Radar and Defense
- ▶ RF and Microwave Design
- ▶ Signal Integrity
- ▶ Simulation and Modeling
- ▶ Test and Measurement



www.ediconchina.com

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.
For reprints please contact the Publisher.



FREE subscription gets you:

- ▶ In-depth, Peer-Reviewed Technical Articles
- ▶ Insights from Industry Leaders
- ▶ Focused Reports
- ▶ Product & Industry News
- ▶ E-Learning Sessions
- ▶ Video Demos
- ▶ Print editions/technical e-books



SignalIntegrityJournal.com/subscribe

NewProducts

Pickoff Tees



RLC Electronics manufactures pickoff tees which offer excellent through-line insertion loss and pickoff stability rise times of < 10 picoseconds (at 40 GHz). Units are offered in standard frequency ranges from DC to 18, DC to 26 and DC to 40 GHz, with the option to customize the pickoff insertion loss value to meet customer specific requirements. The units provide extremely broadband signal monitoring in a very small package ($0.54 \times 0.39 \times 0.32$ in.). RLC offers both catalog options and customized options, and can provide form factor drop-in replacement/obsolescence assistance as needed.

RLC Electronics Inc.
www.rlcelectronics.com

Passive Multiplier



Model SFP-08215-S2 is a F-Band, $\times 2$ passive multiplier that utilizes GaAs Schottky, beam-lead diodes and a balanced circuit configuration to generate second order harmonics with good harmonic and fundamental suppression. This multiplier requires an input frequency range of 45 to 70 GHz at +16 dBm RF power to yield typical 90 to 140 GHz

at +2 dBm typical output power.

SAGE Millimeter
www.sagemillimeter.com


Front-End Modules



Skyworks introduced the SKY85772-11, a new addition to their family of front-end modules (FEM) that are designed for growing retail, carrier and enterprise Wi-Fi 6 applications. The 5 GHz FEM offers best-in-class power and linearity for devices such as access points, routers and gateways. The module's logarithmic power detector allows for wide dynamic power range and its harmonics are FCC compliant, reducing filtering requirements. The solution also delivers 2 dB higher gain, improving linearity when compared to system-on-chip (SoC) architectures.

Skyworks
www.skyworksinc.com

6-Way Power Divider



DFS-9B1 is a 6-way power divider, capable of splitting a signal in the frequency range of 1 to 100 MHz with less than ± 0.2 dB of amplitude unbalance across the band. The small surface mount RoHS compliant package measures $0.945 \times 0.945 \times 0.33$ in. with ENIG finished termination. Features include an input power handling of 1 W max when

used as a power splitter, isolation of 25 dB min. across the band, insertion loss of 0.9 dB max above the theoretical split loss, phase balance between outputs of 3° and a VSWR of 1.2:1 typical across the band.

Synergy Microwave Corp.
www.synergymicrowave.com

CABLES & CONNECTORS

Multi-Position Coaxial and Signal Cable Assemblies



Response Microwave Inc. announced the availability of multi-position D38999 coaxial and signal cable assemblies for lab and both military and telecom specific product platform use. Assemblies can be supplied with up to 24 individual cable inserts with connectors and cable types specific to signal or power requirements and frequencies between DC to



*Advancing Technology
for Humanity*

Boston Section

Professional Development & Education for Advancing Your Career

Online Courses

- Fundamentals of Real-Time Operating Systems (RT201)
- Design Thinking For Technical Work
- Verilog 101: Verilog Foundations
- SystemVerilog 101 (SV101): Design Constructs
- SystemVerilog 102 (SV102): Verification Constructs
- High Performance Project Management
- Introduction to Embedded Linux
- Software Development for Medical Device Manufacturers
- Fundamental Mathematics Concepts Relating to Electromagnetics
- Reliability Engineering for the Business World
- Embedded Linux Optimization
- Embedded Linux BSPs and Device Drivers

SPRING 2020 COURSE LINE-UP

Python Applications for Digital Design
and Signal Processing

Practical RF PCB Design, Wireless
Networks, Products &
Telecommunications

Introduction to Blockchain Programming

Software Development for Medical
Device Manufacturers

Practical Antenna Design for Wireless
Products

DSP for Wireless Communications

DSP for Software Radio

One Centre Street, Suite 203, Wakefield, MA | Tel 781-245-5405 | Email: ieeebostonsection@gmail.com

IEEEBOSTON.ORG

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.
For reprints please contact the Publisher.

FEATURED

WHITE PAPERS

The information you need, from industry experts



New VNA Technologies Enable
Millimeter-Wave Broadband Testing
to 220 GHz



Design of a Complete RF Downconverter
Module for Test Equipment



NewSpace Terminal Testing Challenges
and Considerations

Tips and Tricks on How to Verify Control
Loop Stability

Demystifying Over-the-Air (OTA) Testing

Check out these new online Technical Papers
featured at **MWJournal.com**



Frequency Matters.

NewProducts

18 GHz. Multiple header connector and back-shell options available as well as varied interface for inserts. Custom variants available upon request. Suitable for lab or field environments.

Response Microwave Inc.

www.responsemicrowave.com

Unique Cable Offers Flexibility to 40 GHz



RFMW announces design and sales support for RF cable assemblies capable of small radius bends near the connectors. The P1CA-29M29M-ST085-12 cable assembly is part of P1dB's Tight-Flex™ cable assembly series. With a minimum bend radius of 0.2 in., the cable allows bends at the connector end eliminating the need for a right-angle connectors in some applications. The P1CA-29M29M-ST085-12 measures 12 in. with 2.92 mm male connectors on each end. The ST085 Tight-Flex cable is triple shielded coax with 0.104 in. (2.6 mm) diameter.

RFMW

www.rfmw.com

AMPLIFIERS

Power Amplifier Module



COMTECH PST introduced a new ultra-wide-band high-power solid-state RF module. Comtech's latest development continues to expand on its proven innovative integrated RF GaN power amplifier designs by further increasing the bandwidth and power density.

Consistent with its planned technology development roadmap, Comtech introduced the latest in GaN-based 4 to 18 GHz RF amplifier. This highly integrated design is ideal for use in communication, EW and radar transmitter systems where space, cooling and power are limited. This unit is ideal for UAV/airborne, ground mobile, surface and shipboard applications.

Comtech PST

www.comtechpst.com

Pulse Amplifier



Exodus Advanced Communications' pulse amp is designed for pulse/HIRF mil-std 461/464 and radar applications. Other frequency ranges and power levels available all providing superb pulse fidelity. It covers 4 to 8 GHz, produces 5000 W pulse, 100 usec pulse width up to a 6 percent duty cycle. A min. gain of 67 dB, monitoring parameters for

forward/reflected power, voltage, current and temperature sensing for outstanding reliability and ruggedness. Rack integrated for ease of application integration.

Exodus Advanced Communications

www.exoduscomm.com

High Dynamic Range MMIC Amplifier



Mini-Circuits' TSS-13LN+ ultra-high dynamic range MMIC amplifier provides industry-leading noise figure and IP3 from 1 MHz to 1 GHz.

An internal shutdown feature protects the amplifier in the presence of pulsed signals while keeping the power supply at constant voltage to minimize DC power consumption. This model provides 1.1 dB noise figure and +39.2 dBm IP3, making it ideal for maximizing sensitivity and dynamic range in high performance receiver applications. It delivers 22.8 dB typical gain with ± 3 dB flatness and +19 dBm output power at 1 dB compression. The amplifier is fabricated using E-PHEMT technology with excellent repeatability. It operates on a single 8 V supply and comes housed in a tiny 12-pad 3 x 3 mm QFN package.

Mini-Circuits

www.minicircuits.com

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.

For reprints please contact the Publisher.

MWJOURNAL.COM ■ FEBRUARY 2020

NewProducts

All-in-One 5G mMIMO RF Power Amplifiers



Richardson RFPD Inc., an Arrow Electronics co., announced the availability and full design support capabilities for the comprehensive RF

power multi-chip module (MCM) portfolio for 5G mMIMO from NXP Semiconductors. These devices are part of NXP's 5G Airfast solutions product family and include LDMOS power amplifier modules, GaAs pre-driver modules and receiver modules for cellular frequency bands from 2.3 to 3.8 GHz, with output power from 3 to 5 W.

Richardson RFPD Inc.
www.richardsonrfpd.com

Common-Drain Dual N-Channel 60 V MOSFET



Vishay Intertechnology Inc. introduced a new common-drain dual n-channel 60 V MOSFET in the compact, thermally

enhanced PowerPAK®1212-8SCD package. Designed to increase power density and efficiency in battery management systems, plug-in and wireless chargers, DC/DC

converters and power supplies, the Vishay Siliconix SiSF20DN offers the industry's lowest RS-S(ON) in a 60 V common-drain device. The dual MOSFET released today provides RS-S(ON) down to 10 mΩ typical at 10 V, the lowest among 60 V devices in the 3 × 3 mm footprint.

Vishay Intertechnology Inc.
www.vishay.com

PACKAGING

Assembly Services




StratEdge Corp. announces its assembly services for attaching GaN and other high frequency, high-power devices using gold-tin (AuSn)

and gold-silicon (AuSi) onto copper-molybdenum-copper (CMC) tabs. StratEdge's proprietary eutectic die attach method maximizes the power output a chip can achieve, optimizing its performance and providing an efficient way to dissipate heat to avoid overheating and failures during normal operation.

StratEdge Corp.
www.stratedge.com

SOURCES

Crystal Oscillators



Q-Tech Corp. introduces the QT723 and QT735 Series of space qualified crystal oscillators, offering satellite and

spacecraft designers exceptional performance in the industry's smallest surface-mount packages. These new space, Low-Earth Orbit (LEO) oscillators are 50 kRad (Si) total dose ionization radiation hardened, high shock (20,000 g) resistant and screened per MIL-PRF-55310, Level B with PIND.

Q-Tech Corp.
www.q-tech.com

Direct Synthesizer



RFE's 0.1 to 20 GHz high speed wideband direct synthesizer with 300 nsec tuning

speed features DDS based tuning and has a phase coherent option. For EW/SIGINT, radar test equipment, microwave radio and instrumentation module applications.

RFE
www.rfe-mw.com



2020 IEEE Texas Symposium on Wireless and Microwave Circuits and Systems

April 2-3 • Waco, Texas




IEEE




At the Baylor Research and Innovation Collaborative (BRIC)

For more information and to register, please visit www.TexasSymposium.org

SOFTWARE

Version 5.5 of COMSOL Multiphysics®

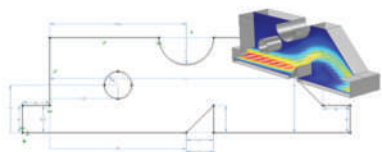


COMSOL announces the latest version of its COMSOL Multiphysics® software. In version 5.5, the design module provides an entirely new sketching tool for easier creation and more versatile parametric control of geometry models. New and updated solvers speed up a wide range of simulations. Two new add-on products, the Porous Media Flow Module and the Metal Processing Module, further expand the product suite's multiphysics modeling power.

COMSOL Inc.
www.comsol.com

3D Geometry Model

VENDORVIEW



Modelithics has introduced a new set of full-wave EM capable 3D geometry models for Coilcraft's 0603CS surface mount air coil

inductor series. The model is now available within Modelithics COMPLETE+3D Library for ANSYS HFSS™. Individual 3D models are available from 1.6 to 390 nH and are validated against multi-substrate measured S-parameters through 20 GHz and equivalent series resistance (ESR), as well as against the corresponding Modelithics CLR Global Circuit model. As Coilcraft is a Sponsoring Modelithics Vendor Partner (MVP), free 90-day trials of all available Modelithics Coilcraft models are available to qualified customers by request.

Modelithics
www.Modelithics.com/MVP/Coilcraft

ANTENNAS

GPS Timing Antennas and UHF Antenna



wireless monitoring applications. L-com's new GPS/GLNSS antennas provide accurate reception of satellite timing signals and

L-com has introduced a new line of GPS timing antennas and a 118 to 174 MHz tunable, telescopic antenna to address the need for mobile wireless, portable instrumentation and

reference frequencies for use in advanced network applications. The new HG110TEL-BNC portable UHF antenna provides high performance in the UHF frequency range of 118 to 174 MHz, is field tunable and features a telescopic radiator and flexible support mast.

L-com
www.l-com.com

COMMUNICATIONS

Ultra-Performance Receiver



The SIR-4000 uses the latest DSP technologies to meet the specific needs of the end user. Elcom recognized that in today's real-time threat environment one size does not fit all. The company's goal was to provide the end user a tool that could cover a wider frequency range (up to 40 GHz) and instantaneous bandwidth (up to 2 GHz) critical to RWR applications.

FEI-Elcomtech
www.fei-elcomtech.com

EXHIBITION - CONFERENCES - ANIMATIONS

RF & Microwave

The trade show for Radiofrequencies, Microwaves, Wireless, EMC, and Optical Fibre

18th & 19th March 2020

Paris Expo
Porte de Versailles

www.microwave-rf.com



@Microwave_RF

MICRO-ADS

FEATURED Books



Check out this month's featured eBooks, online at mwjournal.com/ebooks

KR Electronics
www.krfilters.com
ISO 9001:2008 Certified

Custom & Standard Filters
40+ Years of Military & Commercial Applications

Bandpass	Lowpass
Anti-Aliasing	Notch
Highpass	Root Cosine
Video Filters	Equalizers
Diplexers	Linear Phase
Delay Equalized	Absorptive
Surface Mount	Matched

KR Electronics, Inc.
Avenel, NJ
www.krfilters.com

sales@krfilters.com
Phone 732.636.1900
Fax 732.636.1982

HIGHLY FLEXIBILIZED Thermally Conductive Epoxy TWO PART EP21TDC-2LO

NASA LOW OUTGASSING APPROVED
Per ASTM E595 standards


CRYOGENICALLY SERVICEABLE
Resists temperatures down to 4K



+1.201.343.8983 • main@masterbond.com

www.masterbond.com

FEATURED Books



Check out this month's featured eBooks, online at mwjournal.com/ebooks

RF Amplifiers, Isolators and Circulators from 20MHz to 40GHz


- Super low noise RF amplifiers
- Broadband low noise amplifiers
- Input PIN diode protected low noise amplifiers
- General purpose gain block amplifiers
- High power RF amplifiers and broadband power amplifiers



- RF isolators and circulators
- High power coaxial and waveguide terminations
- High power coaxial attenuators
- PIN diode power limiters
- Active up and down converters

Wenteq Microwave Corporation
138 W Pomona Ave, Monrovia, CA 91016
Phone: (626) 305-6666, Fax: (626) 602-3101
Email: sales@wenteq.com, Website: www.wenteq.com

100 to 1000 Volt Lab Pulsers



Avtech offers a full line of 100, 200, 500, 700 and 1000 Volt user-friendly pulsers capable of driving impedances of 50 Ω and higher. The AVR Series is suitable for

semiconductor and laser diode characterization, time-of-flight applications, attenuator testing, and other applications requiring 10, 20, or 50 ns rise times, pulse widths from 100 ns to 100 μ s, and PRFs up to 100 kHz. GPIB & RS-232 ports are standard, VXI Ethernet is optional.

Avtech Electrosystems Ltd.
<http://www.avtechpulse.com/>



Nanosecond Electronics
Since 1975

FEATURED Books



Check out this month's featured eBooks, online at mwjournal.com/ebooks

Microwave Journal

ATTRACT NEW TALENT
Classified
Microwave Journal's
Employee Recruitment Package
Help Wanted

PACKAGE INCLUDES:

- Print ad distribution to 50,000 readers
- Listing in monthly email
- Listing in MWJ Classified Job Section
- Promotion on social media/LinkedIn 

\$3500 full page ad
\$2500 half page vertical ad

mwjournal.com/salesoffices

Sector Microwave Industries, Inc.



DC to 21.5 GHz. Operation

Space Qualified
Coaxial Switches

(631) 242-2300 FAX (631) 242-8158
www.sectormicrowave.com



5G and Satellite Spectrum, Standards, and Scale

Geoff Varrall

This resource presents the emerging role of Low Earth Orbit (LEO), Medium Earth Orbit (MEO) and Geostationary satellites (GSO) as a delivery option for backhaul and wide area rural and urban mobile broadband and fixed access. The book offers insight into recently established Non Terrestrial Network standards. Readers learn which bands will need to be supported in next-generation 5G and satellite devices and networks and how the bands will be characterized. Channel spacing, guard bands, FDD or TDD, out of band emission limits and in-band performance requirements are discussed. The book discusses what interference issues will arise from new band alloca-

tions including co-shared allocations and how interference will be mitigated in and between next-generation terrestrial and satellite 5G networks. Readers learn how modulation choices will affect co-existence issues.

The book discusses the design, performance, cost and test implications of integrating next-generation satellite physical and MAC layers with Release 16 and 17 5G standards and explores how these emerging spectrum and standards map on to IoT and MTC use cases in specific vertical markets. Readers learn how new active and passive antennas in the K-, V- and W-Band (E-Band) impact the satellite link budget and satellite delivery cost economics.

To order this book, contact:


Artech House
www.artechhouse.com
Email: artech@artechhouse.com
US 800-225-9977
UK +44 (0)20 70596 8750

ISBN: 978-1-63081-502-8
310 pages

\$169/£135

Use code **VAR25** to receive **25%** discount on this title!
(Expires 03/31/2020)

Discover the Current State of the Art in Developing Full Duplex (FD) Systems in 5G

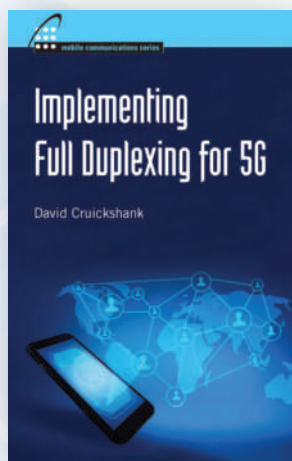

Coming Soon!

Order now and **SAVE 30%**
at www.artechhouse.com
enter promo code **CRU30** at checkout

Implementing Full Duplexing for 5G

David Cruickshank

ISBN: 978-1-63081-695-7

PRACTICAL BOOKS FOR ENGINEERING PROFESSIONALS

Order direct from our website at
ArtechHouse.com

Cannot be combined with any other discount offers.



ARTECH HOUSE
BOSTON | LONDON



Connecting Minds. Exchanging Ideas.



HOW DOES CONNECTIVITY MATTER TO YOU?

10,000

Attendees from 48 Countries
of which 37% are First-Time
Attendees!



20%

of Attendees are
Senior Management



33%

of Attendees are
Design Engineers or Engineering
Management



11%

of Attendees are
in Research and
Development

5G

Dedicated
tracks on 5G,
Autonomous vehicles
and Aerospace



Discover New
Solutions and
Gain Valuable
Insights

Countless
Networking
Opportunities



Can't Miss Event for the RF & Microwave Industry!
REGISTER TODAY!



www.ims-ieee.org



21-26 June 2020

Content is copyright protected and provided for personal use only - not for reproduction or retransmission.
For reprints please contact the Publisher.

Advertiser	Page No.	Advertiser	Page No.	Advertiser	Page No.
3H Communication Systems.....	94	Holzworth Instrumentation.....	54	Pasternack.....	34, 35
Analog Devices.....	27	Huber + Suhner AG.....	43	Planar Monolithics Industries, Inc.....	93
AnaPico AG.....	31	HYPERLABS INC.....	63	PolyPhaser.....	105
Anokiwave.....	20-21, 61, 95	IEEE Boston Section.....	121	Qorvo.....	77
Artech House.....	126	IEEE MTT-S International Microwave Symposium 2020.....	127	Reactel, Incorporated.....	51
Avtech Electrosystems.....	125	IEEE Texas Symposium 2020.....	123	RelComm Technologies, Inc.....	101
B&Z Technologies, LLC.....	11	IEEE WAMICON 2020.....	64	Remcom.....	81
Carlisle Interconnect Technologies.....	71	Impulse Technologies.....	46	RF-Lambda.....	9, 75, 109
CentricRF.....	76	JQL Electronics Inc.....	6	RFE Inc.....	89
Cernex, Inc.....	84	K&L Microwave, Inc.....	7	RFHIC.....	47
Ciao Wireless, Inc.....	48	Koaxis, Inc.....	102	RFMW, Ltd.....	13, 77
Cobham Advanced Electronic Solutions.....	COV 2	KR Electronics, Inc.....	125	Richardson RFPD.....	19
Coilcraft.....	39	KRYTAR.....	38	RLC Electronics, Inc.....	23
COMSOL, Inc.....	15	L-com.....	8	Rohde & Schwarz GmbH.....	25
Crane Aerospace & Electronics.....	42	Logus Microwave Corporation.....	18	Rosenberger.....	59
Custom MMIC.....	37	LPKF Laser & Electronics.....	110	Sector Microwave Industries, Inc.....	125
dBm Corp, Inc.....	104	Master Bond Inc.....	125	SignalCore, Inc.....	42
Ducommun Labarge Technologies, Inc.....	50	MCV Microwave.....	45	Signal Hound.....	41
Eclipse MDI.....	32	MECA Electronics, Inc.....	40	Signal Integrity Journal.....	120
EDI CON China 2020.....	119	Metropole Products, Inc.....	24	Smiths Interconnect.....	29
Empower RF Systems, Inc.....	80	Micable Inc.....	91	Soontai Technology.....	92
EMV 2020.....	62	Microwave & RF 2020.....	124	Southwest Microwave Inc.....	26
ERZIA Technologies S.L.....	72	Microwave Journal.....	114, 115, 122, 125	Special Hermetic Products, Inc.....	60
ET Industries.....	88	Milestek.....	79	Spectrum Elektrotechnik GmbH.....	85
EuMW 2020.....	113, 117	Milliwave Silicon Solutions.....	96	Stanford Research Systems.....	103
Exceed Microwave.....	55	Mini-Circuits.....	4-5, 16, 52, 99, 111, 129	State of the Art, Inc.....	98
Exodus Advanced Communications, Corp.....	69	Mini-Systems, Inc.....	65	Synergy Microwave Corporation.....	57, 107
Fairview Microwave.....	83	Modelithics, Inc.....	97	Syrlinks.....	44
Gapwaves AB.....	112	Morion US, LLC.....	87	Tech-X Corporation.....	74
GeoSync Microwave, Inc.....	33	National Instruments.....	73	Times Microwave Systems.....	COV 3
GGB Industries, Inc.....	3	Norden Millimeter Inc.....	108	Weinschel Associates.....	68
Greenray Industries, Inc.....	30	Norsat International Inc.....	58	Wenteq Microwave Corporation.....	125
HASCO, Inc.....	55	OML Inc.....	67	Wenzel Associates, Inc.....	70
Herotek, Inc.....	78	Passive Plus, Inc.....	28	Werlatone, Inc.....	COV 4
				West Bond Inc.....	90

Sales Representatives

Eastern and Central Time Zones

Michael Hallman
Associate Publisher
(NJ, Mid-Atlantic, Southeast, Midwest, TX)
4 Valley View Court
Middletown, MD 21769
Tel: (301) 371-8830
FAX: (301) 371-8832
mhallman@mwjournal.com

Jaime Leger
Northeast Reg. Sales Mgr.
(New England, New York, Eastern Canada)
685 Canton Street
Norwood, MA 02062
Tel: (781) 619-1942
FAX: (781) 769-5037
jleger@mwjournal.com

Pacific and Mountain Time Zones

Brian Landy
Western Reg. Sales Mgr.
(CA, AZ, OR, WA, ID, NV, UT, NM, CO, WY, MT, ND, SD, NE & Western Canada)
144 Segre Place
Santa Cruz, CA 95060
Tel: (831) 426-4143
FAX: (831) 515-5444
blandy@mwjournal.com

International Sales

Richard Vaughan
International Sales Manager
16 Sussex Street
London SW1V 4RW, England
Tel: +44 207 596 8742
FAX: +44 207 596 8749
rvaughan@horizonhouse.co.uk

Germany, Austria, and Switzerland (German-speaking)

WMS.Werbe- und Media Service
Brigitte Beranek
Gerhart-Hauptmann-Street 33,
D-72574 Bad Urach
Germany
Tel: +49 7125 407 31 18
FAX: +49 7125 407 31 08
bberanek@horizonhouse.com

France

Gaston Traboulsi
Tel: 44 207 596 8742
gtraboulsi@horizonhouse.com

Israel

Dan Aronovic
Tel: 972 50 799 1121
aronovic@actcom.co.il

Korea

Young-Seoh Chinn
JES MEDIA, INC.
F801, MisahausD EL Tower
35 Jojeongdae-Ro
Hanam City, Gyeonggi-Do
12918 Korea
Tel: +82 2 481-3411
FAX: +82 2 481-3414
yschinn@horizonhouse.com

China

Shenzhen
Michael Tsui
ACT International
Tel: 86-755-25988571
FAX: 86-755-25988567
michaelt@actintl.com.hk

Shanghai

Linda Li
ACT International
Tel: 86-021-62511200
lindal@actintl.com.hk

Beijing

Cecily Bian
ACT International
Tel: +86 135 5262 1310
cecilyb@actintl.com.hk

Hong Kong, Taiwan, Singapore

Mark Mak
ACT International
Tel: 852-28386298
markm@actintl.com.hk

Japan

Katsuhiro Ishii
Ace Media Service Inc.
12-6, 4-Chome,
Nishiiko, Adachi-Ku
Tokyo 121-0824, Japan
Tel: +81 3 5691 3335
FAX: +81 3 5691 3336
amskatsu@dream.com

LICC FILTERS


Largest Selection in the Industry!

- ▶ Now over 300 Models in Stock!
- ▶ Case Styles as small as 0202
- ▶ Rejection up to 52 dB
- ▶ Steep Skirts



FAB\$ and LAB\$

MVG Upgrades Testing Labs To Meet 5G Requirements



Since its creation in 1986, The Microwave Vision Group (MVG) has developed a unique expertise in the visualization of electromagnetic waves. These waves are at the heart of our daily lives: smartphones, computers, tablets, cars, trains and planes—none of these devices and vehicles would work without them. Year after year, the Group develops and markets systems that allow for the visualization of these waves, while evaluating the characteristics of antennas and helping speed up the development of products using microwave frequencies. The Group's mission is to extend this unique technology to all sectors where it will bring strong added value. MVG is structured around three departments: AMS (Antenna Measurement Systems), EMC (Electro-Magnetic Compatibility), EIC (Environmental & Industrial Control). MVG is present in 10 countries and generates 90 percent of sales from exports.

MVG has upgraded and extended its measurement labs for customers who do not have their own facility, and has relocated seven of its 15 sites to fuel innovation and accommodate more efficient, customer-centric testing methods. New locations have been established by MVG teams in San Diego, Philadelphia and Atlanta in the U.S., plus Manchester, Munich, Paris and Brest across Europe. Also, the company's Paris headquarters now boasts a sizable production area with a 12 m ceiling height, specifically for the assembly and testing of large multiprobe arches is a world class facility. This was a result of a 36 month program of investment into MVG's testing, engineering and consulting sites across the globe.

The Paris facility is the jewel in the crown, with a production area capable of assembling and testing some of MVG's largest measurement equipment, in highly controlled, industry-leading conditions. This site is now home to six carefully designed testing labs for customers who do not have their own facility but want access to market-leading technologies for product development testing, measurement and certification.

MVG has a unique product; their StarLab 50 GHz is made to meet the high frequency testing challenge operating from 650 MHz to 50 GHz. Because it is compact and portable, it frees up space in laboratories and production environments and saves costs. This new version is a true revolution inside and out delivering ultra-fast and accurate test results, StarLab 50 GHz provides a future-proof turnkey solution for 5G system development and validation.

Stating that the time was right to invest in its infrastructure, MVG will continue to invest further in its other sites throughout 2020 and beyond to ensure its teams are best placed to serve customers from the aerospace and defense, automotive, consumer electronics, telecommunications and research and academic industries.

These strategic changes in MVG's portfolio of infrastructure assets will be used as a blueprint for further improvements over the coming years, to ensure that the Group is continually evolving their business in line with the specific requirements of their industry.

www.MVG-world.com


When Everything is Important... the NEW Clarity™ Series is the Clear Choice

Applications:

5G Development
Research & Development Labs
Bench VNA's and analyzers
High Volume Production Test
RF Module Testing



Industry leading performance, unparalleled value

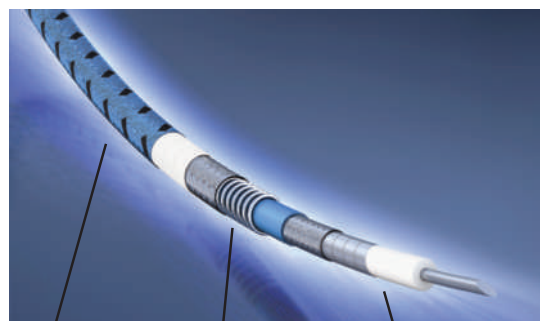

Phase stability <4.0°

Guaranteed up to 50,000 flexes

Super-sharp Sure-Grip™ knurl

Ergonomically designed Sure-Grip™ molding

Do you have a challenging application? Let us help!
www.timesmicrowave.com • techquestions@timesmicro.com
1-800 867-2629



www.timesmicrowave.com

WE ARE HIGH POWER

HIGH POWER RADIAL COMBINERS & DIVIDERS

Multi-kW Power Levels ✦ Low Loss Circuits ✦ Custom Designs Available

Model	Type	Frequency (MHz)	Power (W CW)	Peak Power (W)	Insertion Loss (dB)	VSWR	Connector Type
D9816	8-Way	330-530	10,000	50,000	0.25	1.30	3 1/8" EIA, N-Female
D8454	8-Way	370-450	10,000	50,000	0.25	1.30	3 1/8" EIA, N-Female
D5320	12-Way	470-860	500	5,000	0.3	1.30	All N-Female
D10119	4-Way	700-4200	2,000	15,000	0.3	1.35	13-30 DIN-Female, N-F
D10603	32-Way	900-925	50,000	150,000	0.15	1.25	WR975, 7/16-Female
D10795	32-Way	900-930	25,000	150,000	0.25	1.20	WR975, 4.3-10-F
D9710	8-Way	1000-2500	2,000	10,000	0.3	1.40	1 5/8" EIA, N-Female
D8182	5-Way	1175-1375	1,500	25,000	0.4	1.35	1 5/8" EIA, N-Female
D6857	32-Way	1200-1400	4,000	16,000	0.5	1.35	1 5/8" EIA, N-Female
D9529	8-Way	2305-2360	1,000	6,000	0.2	1.15	7/16-Female, N-Female
D9528	8-Way	2305-2360	2,000	12,000	0.2	1.15	7/8" EIA, N-Female
D11028	16-Way	2305-2360	2,000	20,000	0.2	1.15	1 5/8" EIA, N-Female
D10851	8-Way	2400-2500	8,000	50,000	0.2	1.25	WR340, 7/16-Female
D11433	16-Way	2700-3500	2,000	20,000	0.3	1.35	WR284, N-Female
D11815	16-Way	2700-3500	6,000	40,000	0.3	1.35	WR284, N-Female
D9582	16-Way	3100-3500	2,000	16,000	0.25	1.50	WR284, N-Female
D11839	16-Way	5300-5900	8,000	50,000	0.15	1.40	WR159, 7/16-Male

