

PRACTICAL
WIRELESS

PW

THE RADIO MAGAZINE

FLY PW TO THE USA
Visit Dayton Hamfest
the holiday of a lifetime
for only £499

**WIN A DEWSBURY
SUPA-TUTA MORSE
TRAINER**

Build

**A SEMI BREAK-IN
MORSE PROJECT**

144MHz ANTENNA

Reviews

**AEA ISOLOOP HF
ANTENNA**

DEWSBURY SUPA-TUTA

Plus

**LEICESTER SHOW PULL-
OUT PLAN & GUIDE**

Cover subject

**ONE MAN AND HIS
WAGON - Radio
Personality G4YXV**

NOVEMBER 1990

£1.60

ISSN 0141-0857



**NEWSDESK '90 - RADIO DIARY - DISCOUNT VOUCHER
AND LOTS MORE INSIDE THIS ISSUE**

THE NEW

FT-1000

FOR DYNAMIC DX

YAESU

The FT-1000 is a new top of the range all mode h.f. transceiver that is the result of more than 25,000 hours of intensive research by Yaesu's top design engineers. They have adopted a completely new approach to the application of digital and RF technology. The extensive use of surface mounted components has allowed six microprocessors and five Direct Digital Synthesisers to be integrated with a simple to use operator interface to give a highly reliable full featured transceiver that has been optimised for serious h.f. applications. Please write or call SMC or your local authorised Yaesu dealer for the full specifications of this dynamic new transceiver and discover how you can open up the bands.



YAESU

UK Sole Distributor

South Midlands Communications Ltd
S.M. House, School Close,
Chandlers Ford Industrial Estate,
Eastleigh, Hants SO5 3BY
Tel: (0703) 255111

Prices and specifications are subject to change without notice

NOVEMBER 1990
(ON SALE OCTOBER 11)
VOL. 66
NO. 11
ISSUE 1004


Editor
Rob Mannion G3XFD
Art Editor
Steve Hunt
Technical Projects Sub-Editor
NG ("Tex") Swann G1TEX
Technical Artist
Rob Mackie
Production
Sharon George
Editorial Assistant
Donna Vincent
Administration Manager
Kathy Moore
Accounts Manager
Alan Burgess
Accounts Assistant
Darren Howe
Clerical Assistant
Rachel Parkes

Advertisement Manager
Roger Hall G4TNT
PO Box 948
London SW6 2DS
☎ 071-731 6222
Cellphone 0860 511382
FAX 071-384 1031

Advert Copy and Make-up
(Poole Office)
Marcia Brogan
☎ Poole (0202) 676033
FAX Poole (0202) 666244

Editorial and Advertisement
Offices:
Practical Wireless
Enefco House
The Quay
Poole
Dorset BH15 1PP
☎ Poole (0202) 678558
(Out-of-hours service by
answering machine)
FAX Poole (0202) 666244
Prestel 202671191

Contents November 1990

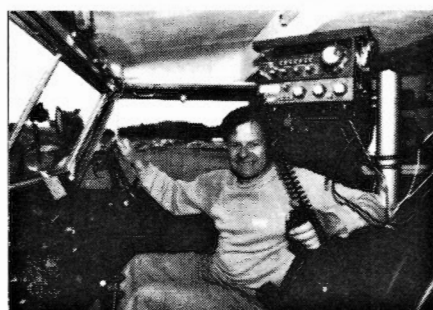

23



56

Regular Features

- 79 Advert Index
- 60 Backscatter
- 75 Book Service
- 38 Errors & Updates
- 15 Keylines
- 18 Newsdesk '90
- 36 PCB Service
- 73 Radio Diary
- 16 Receiving You
- 19 Services
- 30 Subscriptions
- 74 Wanna Swap
- 26 Wireless-Line

- 17 **Competition Corner**
- 20 **Discount Voucher**
- 23 **Radio Personality - G4YXV**
- 24 **2-Element Extended Collinear Antenna For The 144MHz Band**
Fred Judd G2BCX
- 29 **PW Review - Dewsbury Supa-Tuta Morse Teaching Aid**
Mike Richards G4WNC
- 33 **Dayton Hamvention '91 - Special Feature & Special Offer** *Roger Hall G4TNT*
- 38 **CB Corner**
Rick Maybury
- 40 **Leicester Show Pull-Out Guide**
- 42 **Meet Our Leicester Ladies! PW Book Review**
- 43 **PW Review - AEA IsoLoop Antenna**
Rob Mannion G3XFD
- 46 **Lower Frequencies In Smaller Gardens - Part 1**
Paul Essery GW3KFE
- 51 **PW QRP Contest - Full Results**
Neill Taylor G4HLX
- 54 **Packet Panorama**
Roger Cooke G3LDI
- 56 **PW Review - Kenpro KT-22E Hand-Held Transceiver**
Rob Mannion G3XFD
- 59 **What A Good Idea**
Ken Fisher G0LKX

ICOM

NEW MODELS



Designed for the serious operator on the 144,430 and 1200MHz bands, Icom's IC-970E has up-to-date technology for DX, digital and satellite communications.

The IC-970E is supplied as an all-mode dual-bander for 144 and 430MHz bands. Optional units expand its capabilities to 1200MHz or wideband receiving from 50-905MHz.

Communication via satellites has never been easier, the IC-970E automatically tracks uplink and downlink frequencies as the tuning control is rotated, there are also ten

specific memory channels for satellite frequencies.

The dual-band watch allows you to receive both MAIN and SUB band audio simultaneously, multiple scanning systems on the MAIN and SUB bands plus 99 memories, an easy to read central display and Icom's DDS system makes this one of the most comprehensive multi-band transceivers available.

For more details on the IC-970E and any other Icom radio contact your local authorised dealer or call Icom.

Icom (UK) Ltd.

Dept. PW, Sea Street, Herne Bay, Kent CT6 8LD. Tel: 0227 363859. 24 Hour. As from 1st September our showroom opening times will be Mon-Fri 09.00-13.00 and 14.00-17.30.

Count on us!

S AT LEICESTER



The IC-901 is a 2M/70cm. Dual-Band FM modular mobile featuring the versatility of upgrading to a multiband system with the addition of optional band units.




Band stacking is available for 28,50 and 1200MHz and 144MHz SSB/CW operation. By adding the wideband receive unit other interesting stations can be heard.


When the front panel and main body are combined the IC-901 operates as Dual-Band transceiver. By using the fibre optic cable the main body and optional band units can be easily boot mounted for complete security, leaving only the remote head to control the transceiver's functions on view. This system is ideal for the security conscious amateur and motorist where dash-board space is limited.

MULTIPLE INSTALLATION CONFIGURATIONS


• Basic 1-body style



• Basic separate style

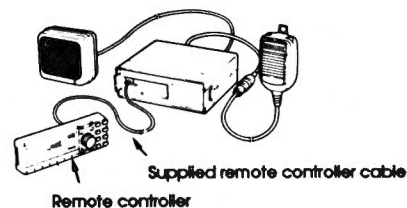


• With optional band units

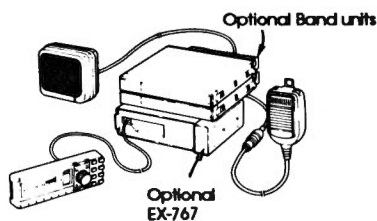

Optional band units allow you 28, 50 and 1200 MHz FM operation and 144 MHz SSB and CW operation.

• Separate Installation using an optical fibre cable

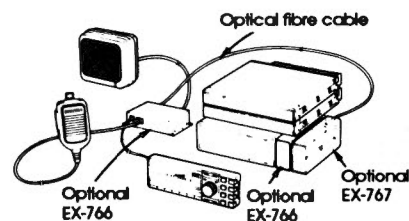

By connecting optional interface units and an optical fiber cable, all band units can be installed in the boot of your vehicle

Helpline: Telephone us free of charge on 0800 521145 Mon-Fri 0900-13.00 and 14.00-17.30. This service is strictly for obtaining information about or ordering Icom equipment. We regret this cannot be used by dealers or for repair enquiries and parts orders, thank you.

Despatch: Despatch on same day whenever possible.

Visa & Mastercards: Telephone orders taken by our mail order dept. instant credit & interest-free HP.



SMC**South Midlands Co****SCHOOL CLOSE, CHANDLERS FORD IND. EST., EASTLEIGH, HA****WHY NOT COME AND SEE US ON STAND****S8 AT LEICESTER FOR SOME SHOW SPECIALS*****Either the amazing FT747GX***

Light in weight and low in price, the FT747GX, is a high performance HF rig with a great receiver and full power transmitter. With a refreshingly simple control panel the FT747GX is ideal for hopping around the bands chasing those exotic DX stations. Full 100W PEP and factory installed filters for CW & AM give improved performance on today's crowded bands.

All this housed in a high impact metallised plastic case, must surely be too good to miss especially at such an attractive price.

**FT747GX**

**NOW
ONLY £549 inc VAT**

WITH CW & AM FILTERS FITTED AS STANDARD**OTHER OPTIONS INCLUDE**

MMB42A MOBILE BRACKET ..	£65.00
D3000568 FM UNIT	£39.99
D3000561 TCXO UNIT	£46.00
FP757HD P.S.U.	£258.75
FC700 A.T.U.	£149.00

or the incredible FT736R

With Yaesu's new FT-736R VHF/UHF base station, you can discover some of the best DX happening in ham radio. Via moonbounce, Tropo, Aurora, Meteor scatter. Or satellites. You see, the FT-736R is the most complete, feature-packed rig ever designed for the serious VHF/UHF operator. For starters, the FT-736R comes factory-equipped for SSB, CW and FM operation on 2 meters and 70cm, with two additional slots for optional 50MHz or 1.2GHz modules. Crossband full duplex capability is built into every FT-736R for satellite work. And the satellite tracking function (normal and reverse modes) keeps you on target through a transponder. The FT-736R delivers 25 watts RF output on 2 meters and 70cm and 10 watts on 6 meters and 1.2GHz. Store frequency, mode and repeater shift in each of the 100 memories. For serious VHF/UHF work, use the RF speech processor, IF shift, IF notch filter, *CW Narrow Optional and FM wide/narrow IF filters, VOX, Noise blanker, three-position AGC selection, Preamp switch for activating your tower-mount preamplifier. Even an offset display for measuring observed Doppler shift on DX links. And to custom design your FT-736R station, choose from these popular optional accessories: Iambic keyer module, FTS-8 CTCSS encode/decode unit, FVS-1 voice synthesizer, FMP-1 AQS digital message display unit, 1.2GHz ATV module, MD-1B8 desk microphone, E-736 DC cable, and CAT (Computer Aided Transceiver) system software.

*CW narrow optional

**for only
£1199 inc VAT**

**Can be easily modified
for 9600 and 1200 baud
PSK packet operation.**

LEEDS
SMC (Northern)
Nowell Lane
Industrial Estate
Leeds LS9 6JE
Leeds (0532) 350606
9-5.30 Mon-Sat
Closed Sat afternoon

CHESTERFIELD
SMC (Midlands)
102 High Street
New Whittington
Chesterfield
Chest. (0246) 453340
9.30-5.30 Tues-Sat

BIRMINGHAM
SMC (Birmingham)
504 Alum Rock Road
Alum Rock
Birmingham B8 3HX
(021-327) 1497/6313
9.00-5.00 Tues-Fri
9.00-4.00 Sat

AXMINSTER
Reg Ward & Co Ltd
1 Western Parade
West Street
Axminster
Devon EX13 5NY
Axminster (0297) 34918
9-5.20 Tues-Sat



SOUTHAMPTON SHOWROOM open 9.00-5.00 Monday to Friday, 9.00-1.00 Saturday. Service Dept open Mon-Fri 9.00-5.00.

SUMMER SPECIALS ON YAESU HANDHELDS

SMC


ARE PLEASED TO ANNOUNCE SOME VERY SPECIAL PACKAGE DEALS ON VHF/UHF HANDHELDS. IF YOU BUY ANY OF THE FOLLOWING HANDHELDS WITH AN FNB10 NICAD WE WILL GIVE YOU AN SMC28 WALL CHARGER ABSOLUTELY FREE. A SAVING OF AROUND £14.

FT23R + FNB10 + SMC28 £239 FT73R + FNB10 + SMC28 £249

FT411 + FNB10 + SMC28 £249 FT811 + FNB10 + SMC28 £259

FT470 + FNB10 + SMC28 £384

ONLY AVAILABLE WHILE STOCKS LAST

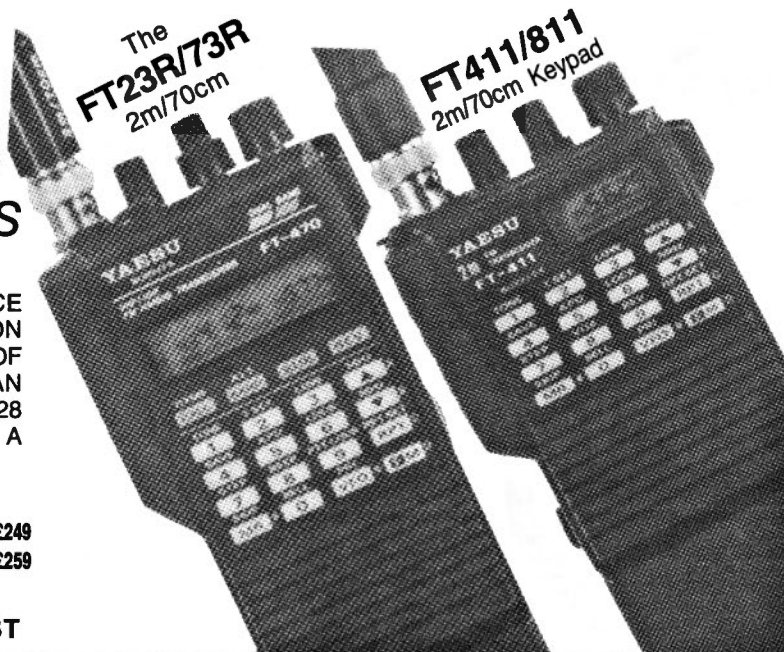

**NOW
BACK
IN STOCK**

HX240 2m to HF TRANSVERTER

Only

£249.00

Inc VAT



HX240: 2m to HF Transverter

Frequency Coverage: 80m, 40m, 20m, 15m, 10m

Output power: 30-40W PEP (SSB/CW)

RF Drive: 2.5W/10W Selectable

Rx Preamp Gain: 8-10dB

Power Requirement: DC 13.8V, 7A

Additional features: Carrier operated switching or by remote socket, power output meter, switchable preamp Hi/Lo output selectable, visual indication of antenna mismatch.

ALSO AVAILABLE HX640 for 6m TRANSCEIVERS

A PERFECT MATCH FOR THE FT290R2/FT690R2



What could Yaesu engineers do to improve on the hugely popular FT x 90R series? The answer was easy, they designed and built the FT x 90R2 series. The FT x 90R2 series of transceivers provide high performance and a 2.5W output, when used with 'C' cells or nicads, ideal for serious portable operations, or when combined with matching linears, and easy to use compact multimode mobile or base station. What more could you ask from a transceiver?

FT290R2

RRP **£429.00 inc**

FT690R2

RRP **£429.00 inc**

FT790R2

RRP **£499.00 inc**

ALL THE ABOVE ARE SUPPLIED WITH FBA6, MH10E8, STRAP AND ANTENNA AS STANDARD.

*FREE FINANCE ON SELECTED ITEMS

On many regular priced items SMC offers Free Finance (on invoice balances over £120) 20% down and the balance over 6 months or 50% down and the balance over a year. You pay no more than the cash price! Details of eligible items available on request. *Subject to status.

CARRIAGE CHARGES

Carriage is charged on all items. Small items, Plugs, Sockets etc by post £1.75. Antennas, Cables and larger items by LYNX from £5.75. Transceivers etc, next day delivery from £8.35. Overnight delivery can be specified at extra cost for other items. Same day despatch whenever possible.

YAESU DISTRIBUTOR WARRANTY

Importer warranty on Yaesu Musen products. Ably staffed and equipped Service Department. Daily contact with the Yaesu, Musen-factory. Tens of thousands of spares and test equipment.


PRICES & AVAILABILITY SUBJECT TO CHANGE WITHOUT PRIOR NOTICE



ROTATORS

The RCS Series of rotators from Creative Design are built to meet the exacting standards required by both professional and amateur users. A range of methods is available designed to cater for medium to large shed antennas. All the rotators are manufactured with high quality components allowing continued and reliable operation.

Carriage on:
Rotators £7.50
CK-46 £3.50



6M BEAMS

New from Creative Designs are a range of 6M beams, the CL6DX 6 element, CL6DX 7 element and CL6DX 8 element.

All these antennas are the result of long and continued research to achieve the best possible performance whilst remaining both cost effective and extremely robust.
CL6DX 5 ele 13dB* £115.00 P&P £8
CL6DX 7 ele 14.3dB* £168.99 P&P £14
CL6DX 8 ele 14.5dB* £225.00 P&P £14
*Manufacturers figures



COMET & HOKUSHIN ANTENNAS

New from Hokuskin, an exciting range of high performance antennas, the WX1 has been a best seller for some time now, available are its bigger brothers the WX2 and WX4. Both are multi section 2m/70cm colinears and the mechanical construction the best we have seen yet. On the mobile front a new mini dual band mobile, the HS-727SS, very similar to the Comet CHL21J, and tests with our network analyser confirm its compatibility with our existing range of gutter and mag mounts. Also available a low profile hatchback mount and cable, the SS-B1, two new dual band antennas, the very slim VM-720SKR and the compact HS-727VMS. Both are suitable replacements for the 70N2M. For the HF enthusiasts a compact 10m HB9CV dual driven element antenna that is extremely light and very cleverly constructed.

WX2
VHF/UHF Base
144/432MHz
6/8dB gain
200W max
£75.00

WX4
VHF/UHF Base
144/432MHz
7.8/10.8dB gain
200W max
£99.00

HS-727SS
VHF/UHF Mobile
144/432 mini
1/4 5/8 wave
100W max
£16.95

28HS-2HB
10m 2 ele HB9CV
Dual driven element
6dB gain
500W PEP max
£65.00

MOBILE ANTENNAS

20W	2m 1/2 wave	£4.95
2NE	2m 5/8 wave folding	£13.25
78B	2m 7/8 wave	£15.00
78F	2m 7/8 wave folding	£21.50
88F	2m 8/8 wave	£24.10
258	70cm 2 x 5/8	£29.37
358	70cm 3 x 5/8	£33.73
268E	70cm 2 section colinear	£32.80

DUAL BAND MOBILE

CHL21J	Mini dual band mobile	£14.95
CHL23J	Small dual band mobile	£16.90
CA2X4MG	2m 2 x 5/8 70cm 4 x 5/8	£38.95
CA2X4MB	2m 4.5dB 70cm 7.4dB	£37.75
HS-727SS	Dual band mini antenna NEW	£16.95
HS-727VMS	2m 1/2 70cm 2 x 5/8 NEW	£25.95
VM-720SKR	2m 1/2 70cm 2 x 5/8 NEW	£24.95

DUAL BAND BASE ANTENNAS

WX1	2m/70cm colinear	£54.99
WX2	2m/70cm colinear	£75.00
WX4	2m/70cm colinear, high gain	£99.00
CA2X4WX	2m/70cm colinear	£79.00
CA2X4MAX	2m/70cm colinear, high gain	£99.95
CF416MN	Duplexer 1.3-500/400-540MHz	£25.50
HS790DN	Duplexer Vless 1.6-150/410-460MHz	£25.50

ANTENNA MOUNTS

GCCA	Gutter mount and cable	£14.25
HDTMCA	S/S trunk mount and cable	£19.50
SOMM	Mag mount and cable	£12.75
TBR	S/S hatch back mount NEW	£11.25
RS17	Mini hatch back mount NEW	£12.50
RS16	Mini gutter mount NEW	£12.50
SS-B1	Mini back mount & cable NEW	£26.50
CK-3LX	Cable assembly for RS16, 17, TBR	£19.95

CARRIAGE BASE ANTENNA £7.50, MOBILE ANTENNAS £4.00, CABLES AND MOUNTS £3.50

ROTATORS



Superb engineering standards combined with pin sharp setting accuracy means new technology from Yaesu create Kenpro Hygain.

ROTATORS

AR200XL	OFFSET TYPE 3 WIRE	£49.50
G-250	BELL TYPE TWIST/SWITCH CONTROL	£78.00
G-400	BELL TYPE METER CONTROLLER	£139.00
G-400RC	BELL TYPE ROUND CONTROLLER	£169.00
G-600RC	BELL TYPE ROUND CONTROLLER	£219.00
TZX	BELL TYPE METER CONTROLLER	£499.00
G-800SDX	BELL TYPE 450 DEG VAR. SPD	£325.00
G-1000SDX	BELL TYPE 450 DEG VAR. SPEED	£368.00
G-2000RC	BELL TYPE ROUND CONTROLLER	£445.00
G-500	ELEVATION METER CONTROLLER	£149.95
G-5400B	AZIMUTH/ELEV DUAL CONTROL	£375.00
G-5600B	AZIMUTH/ELEV DUAL CONTROL	£435.00
RCS-1	BELL TYPE PRESET	£275.00
RCS-3	BELL TYPE ROUND CONTROLLER	£219.00
RCSA-3	BELL TYPE VAR. SPEED AND PRESET	£425.00
RCSB-3	BELL TYPE VAR. SPEED AND PRESET	£675.00

ROTATOR HARDWARE

AR200AB	ALIGNMENT BEARING AR200XL	£17.50
KSS05	ROTARY BEARING 1 1/2" MAST	£19.95
GS-065	ROTARY BEARING 2" MAST	£29.95
GC-038	LOWER MAST CLAMP G-400, 600 etc	£16.95
9523	CHANNEL MASTER BEARING	£19.95
CK46	ROTARY BEARING 1.5-2.5 MAST	£34.95
MC1	LOWER MAST CLAMP RCS SERIES	£25.00


ROTATOR CONTROL CABLE

RCSW	5 WAY G-400RC, 800, 1000SDX PER MTR	£0.48
RCSW	6 WAY G-250, 400, 600, RC KRS00 PER MTR	£0.66
RCSW	8 WAY HAMV, TZX 2000RC RC SERIES PER MTR	£0.72

CARRIAGE

ROTATORS £7.50, ROTATOR HARDWARE £3.50, ROTATOR CABLE £3.50 UP TO OVER 20 MTS, OVER 20 MTS £5.00.

SWR/PWR METERS




FS710V

YS60

FS710V	50-150MHz	15/150W	PEP £107.80
FS300H	1.8-60MHz	20/200/1000W	£53.40
FS210	1.8-150MHz	20/200W	Auto SWR £65.50
FS301M	2-30MHz	20/200W	£42.25
FS301MH	2-30MHz	200/2000W	£42.25
FS711H	2-30MHz	20/200W	Head/Display £43.65
FS711V	50-150MHz	20/200W	Head/Display £43.65
FS711U	430-440MHz	5/20W	Head/Display £43.65
FS711C	26-30MHz	10/100W	Head/Display £24.55
FS500V	50-150MHz	20/200W	£81.95
W720S	130-440MHz	20/200W	Head/Display £52.75
SWR50B	3-5-150MHz		£36.75
FS20DL	3-150MHz	1/10W	£43.65
FS20D	3-150MHz	5/20W	£43.65
SWR3E	3-5-150MHz	20/200/1000W	£28.75
JD110	1.5-150MHz	10/100W	£16.50
T435	144/430MHz	20/200W	£85.00
YMX	3-5-150MHz	Rel. Power/SWR Twin meter	£31.50
OSCAR-171B	3-5-150MHz	Rel. Power/SWR Twin meter	£26.85
SP425	140-524MHz	5/15/150W	£119.95
YS60	1.6-60MHz	20/200/2000W	£93.15
YS600	140-525MHz	4/20/200W	£81.85

Carriage on all power meters £4.00

MORSE KEYS



MORSE KEYS

		p.p.
HK702	STRAIGHT KEY	£42.75 £1.75
HK703	STRAIGHT KEY	£49.69 £1.75
HK704	STRAIGHT KEY	£26.35 £1.75
HK705	STRAIGHT KEY	£26.25 £1.75
HK706	STRAIGHT KEY	£28.95 £1.75
HK707	STRAIGHT KEY	£25.49 £1.75
HK708	STRAIGHT KEY	£26.45 £1.75
HK710	STRAIGHT KEY	£41.75 £1.75
HK711	STRAIGHT KEY KNEE MOUNTING	£41.75 £1.75
BK100	MECHANICAL BUG	£41.45 £2.00
MK701	SINGLE LEVER PADDLE	£38.35 £1.75
MK702	SINGLE LEVER PADDLE	£41.50 £1.75
MK703	SQUEEZE KEY	£37.00 £1.75
MK704	SQUEEZE KEY	£24.99 £1.75
MK705	SQUEEZE KEY	£32.78 £1.75
MK706	SQUEEZE KEY	£35.00 £1.75
HK802	DELUXE BRASS KEY	£99.95 £2.50
HK803	DELUXE BRASS KEY	£89.95 £2.50
HK804	DELUXE BRASS KEY	£95.00 £2.50

MORSE EQUIPMENT

KP100	SQUEEZE KEYS	£109.25 £2.50
DEWSKEYD	STAR MASTER KEYS	£54.69 £2.50
DEWSKEY M	STAR MASTERKEY MEMORY	£94.99 £2.75
D70	MORSE TUTOR	£93.40 £2.50


DATA TERMINAL

PK232/FAX	MULTIMODE DATA TERMINAL	£289.95 £3.50
PK232/MAIL	MULTIMODE DATA TERMINAL	£319.95 £3.50
	C/W Mail Drop	

SOUTHAMPTON (0703) 255111
CHESTERFIELD (0246) 453340
AXMINSTER (0297) 34918

LEEDS (0532) 530606
BIRMINGHAM 021 327 1497
For full addresses see display advert

REALISTIC

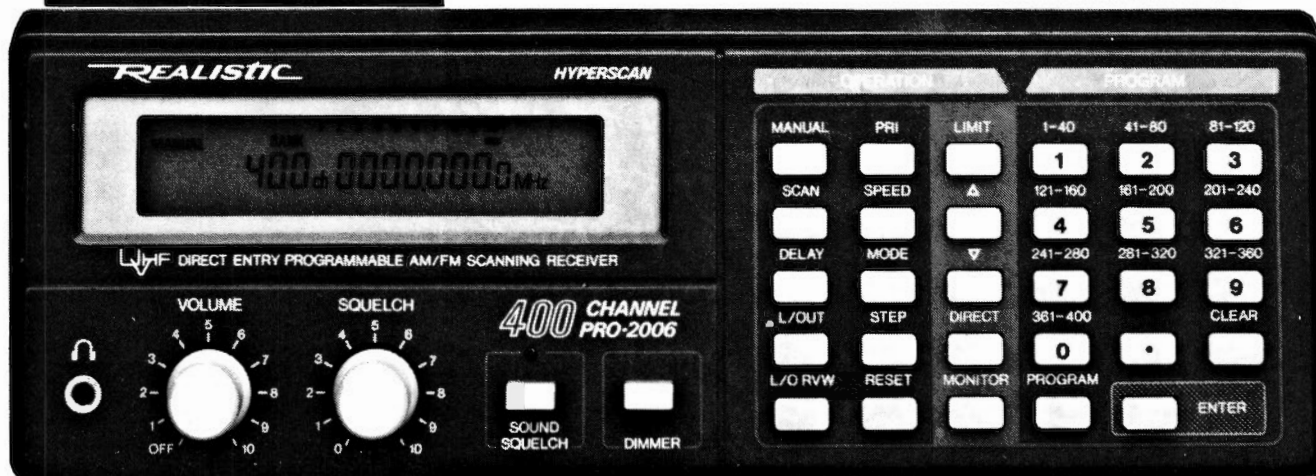

**Covers: 25 - 520 MHz
And 760 - 1300 MHz**

400-Channel With Hyper Scan

£349 ²⁰⁻⁹¹⁴⁵ 9%

Realistic PRO-2006. Features ten 40-channel memory bands, a 10-channel monitor bank for temporary storage, plus search and favourite channel priority functions. Hyper scan doubles the scanning speed - 13 or 26 channels per second. Backlit LCD display with dimmer. AM, FM-narrow and FM-wide modes. Jacks: tape out, 3.5mm headphone, external speaker, external DC power and BNC aerial input. Memory backup requires 9v battery. Measures: 76 x 222 x 209mm. Mains operation (or 12 VDC cord, extra).


**PRO
SCANNERS**

16-Channel Mobile Scanner

£99 ²⁰⁻⁹¹⁴⁶ 9%

Realistic PRO-2025. This scanner gives you direct access to different frequencies. You can select up to 16 channels to scan and you can change your selection at any time. Features automatic two-second scan delay, memory backup, priority channel and lockout function that lets your scanner skip over specified channels. Squelch and volume controls. Jacks: power, external speaker and aerial. 12 VDC neg. gnd. only. Measures: 45 x 140 x 175mm.

**Covers: 66-88, 136-174 MHz
And 406-512 MHz**

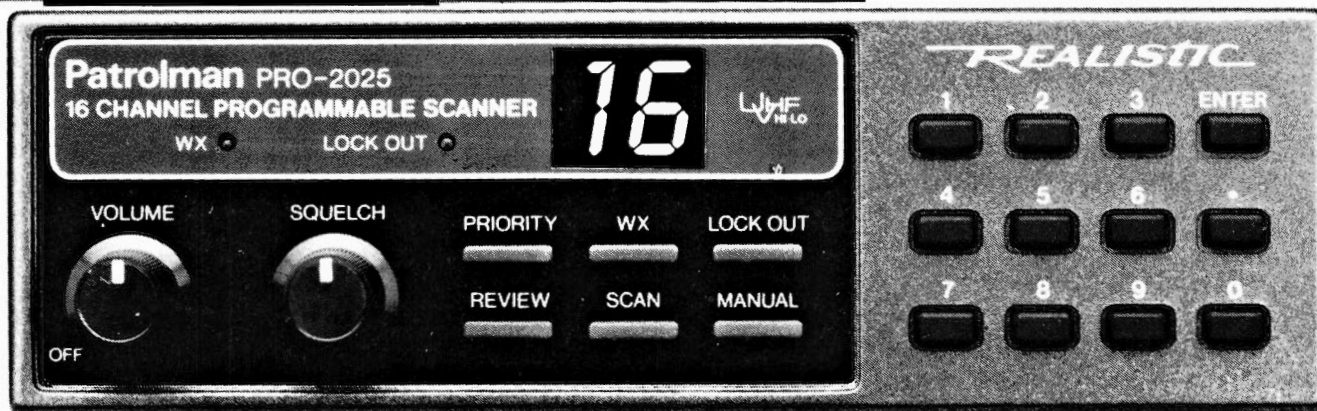

Tandy

**All The Action
As It Happens**

**Over 500 Tandy Stores And Dealerships Nationwide.
See Yellow Pages For Address
Of Store Nearest You.**

**InterTAN U.K. Ltd., Tandy Centre, Leamore Lane, Walsall,
West Midlands. WS2 7PS Tel: 0922 710000**

ARE

COMMUNICATIONS
PHONE 081-997 4476
FAX 081-991 2565

ICOM IC-R100



IC-R100 Mobile/Base Receiver now with SSB! WHY SETTLE FOR ANYTHING LESS

For the enthusiast who prefers a more permanent installation the IC-R100 is ideal giving full frequency coverage of 500kHz-1800MHz and AM/FM. FM wide modes of operation. The IC-R100 boasts 100 memory channels to store your favourite stations and has features similar to the little pocket receiver. 48 monthly payments of £16.77.

ONLY FROM US
— WITH SSB

NOW ONLY

£499



**THE AMAZING
IC-R1 SCAN
RECEIVER
NOW AT A
NEW AMAZING
PRICE
£379**

**FREQUENCY
RANGE
100kHz to
1300MHz
NO GAPS
A.M. or F.M.
ALSO
AVAILABLE
ON
EASY TERMS**

48 payments of
£12.86 per month

**Other Scanners Available —
JUPITER II
FAIRMATE
UNIDEN**

ICOM IC-725 or 726 HF Transceivers for both mobile or base — the 726 HAS 6 meters inc.



**PHONE FOR OUR PRICE
YOU MIGHT BE AMAZED**

THE NEW ICR72 RECEIVER 100KC to 30MHz SSB AM CW

Powered by either internal batteries or
external supply
Superb selectivity and sensitivity



PHONE FOR OUR PRICE

ICR-7000HF Receiver 500kHz — 2GHz



Now available on super credit terms.
48 monthly payments of £33.23
Cash/cheque/credit card price.

**NO
DEPOSIT**


£989. with HF fitted

**YES, 500kHz to 2GHz
CONTINUOUS receive
in one unit**

STEP INTO WITH 'A.'

IN 1992 WE ARE PROMISED A COMPETITIVE SELECTION OF BRANDS BY BEING ABLE TO PURCHASE EQUIPMENT FROM PRIDED OURSELVES IN BEING FIRST IN THE FIELD. AND FROM BOTH EUROPE AND THE FAR EAST, WE CAN OFFER DISTRIBUTORS' LIST PRICE, WITH FULL BACK UP OF

NOW INCLUDING FM BOARD YAESU FT-747 NOW £499 INC VAT CW & AM FILTERS ARE AVAILABLE IF REQUIRED



**AVAILABLE WITH NO DEPOSIT AND
48 MONTHS TO PAY — £16.94 PER MONTH**

THE FT747 HF TRANSCEIVER SSB/CW/AM (AND OPTIONAL FM) 100 WATTS PEP OUTPUT ON ALL HF BANDS AND GENERAL COVERAGE ON RECEIVE 100kHz-30MHz. DUAL VFO 20 MEMORIES. ALTOGETHER A SUPER ECONOMICAL HF TRANSCEIVER.

A DREAM COME TRUE

**Bored with two metres?
Then why not turn that 2m rig
onto the HF bands**



HX240
TRANVERTER

YAESU
FT 290

**FT-290R II £395 2 METRE TRANSVERTER
TOKYO HX240
£249**

With the HX240 feed in 3 to 10 watts on 2m and transmit on 10-15-20-40 or 80 with 40 watts output

LEICESTER SHOW HOT LINE

**6 ROYAL PARADE
HANGER LANE, EALING
LONDON W5A 1ET**

PHONE 081 997 4476 FAX 081 991 2565

TO THE FUTURE A.R.E.' PRICES!!!

OF DISTRIBUTORS FOR MAJOR AMATEUR
ANY EEC DISTRIBUTOR. WE AT A.R.E. HAVE
IT IS NOW, — WITH OUR DIRECT IMPORTS
MOST MAKES AT PRICES FAR BELOW U.K.
ACCESSORIES, SPARES AND SERVICE.



How's the
yen
Bernie?

STAND S41 LEICESTER



Not too
bad,
considering
my age!

Available on easy terms
Kenwood TS440S & Auto ATU



One of the finest HF transceivers ever
produced by Kenwood. Whether used as
a base station or mobile — its superb
specification rates it high amongst its
competitors.

£1,195 inc VAT

**ALL ACCESSORIES AVAILABLE
FOR KENWOOD**

MC43 MIC
MC60 MIC
MC80 MIC
MC85 MIC
PS 430 PSU
PS 50 PSU
SP 430 SPEAKER
CW FILTERS
AM FILTERS

TS 440 AVAILABLE ON
48 PAYMENTS OF
£40.56

ONCE AGAIN **A.R.E. COMMUNICATIONS**
BREAK THE PRICE BARRIER!

NOW A 2 METRE HAND
HELD TRANSCEIVER
MADE BY KENPRO
MODEL KT22E FOR

£129 inc VAT

PACKAGE INCLUDES
NICAD PACK CHARGER
AND ANTENNA

- ★ FULLY SYNTHESISED
- ★ THUMBWHEEL TUNING
- ★ 10 MHZ COVER ON RX
- ★ 1750 HZ TONE BURST
- ★ 600KHZ SHIFT FOR
REPEATER OPERATION
- ★ LOW AND HIGH POWER
SWITCH

£129 OR

12 MONTHLY
PAYMENTS OF
£12.35



YOURS — FOR LESS
THAN 50P PER DAY



IC-781

ICOM'S TOP OF THE RANGE
TRANSCEIVER AND RECEIVER



IC-R9000

PHONE FOR OUR PRICE
YOU WILL BE
AMAZED

**FOR PRE-EXHIBITION
MAIL ORDER**

**STANDARD
C520**

*Probably the most
versatile dual band hand held
available!*

Packed with so
many features
that we haven't
the room to list
them all. But we
will try a few:
Full Duplex
Dual Receive
Extend Cover
Programmable
Offsets

CTCSS DTMF
5 TONE PAGER
RECEIVE 130-175
330-470
820-960

£349

or 48
payments of
£11.85



**WHAT ELSE
IS NEW!**

**TOKYO DUAL BAND VHG AND
UHF LINEAR AMP
IDEAL FOR YOUR DUAL
BANDER**

Also **NEW RANGE** of
DAIWA including
HF TUNERS, RF AMPS,
DIGITAL SWR/POWER METERS
AND NEW POWER SUPPLIES

**ALL EASY TERMS ARE
BASED ON AN APR of 29.8%**

THE LITTLE
RIG WITH
THE BIG
HEART
SO SMALL
THAT IT FITS
INTO A SHIRT
POCKET AND
STILL LEAVES
ROOM FOR A
SPEAKER MIC,
NOT THAT YOU
NEED ONE.
THIS RIG HAS
IT ALL!

**Our Price
£259**
or 48
payments of
£8.80

2M HANDIE



This month only...

LEICESTER SHOW SPECIALS

FT-23R

2M Handheld
incl. NICAD FNB10

£199



MVT5000

JUPITER
SCANNERS
25-550 +
800-1300MHz
incl. Nicads,
case, DC lead!


£249



AMR1000

A 25 watt 2 metre FM

For only **£199**
while stocks last!



IC-735

H.F. BARGAIN with
general coverage + mic.

~~£979~~ **£865!**



**ALL
THIS
AND
MORE!**

*We have
the best
selection of
HF
transceivers
you will see
anywhere!*

*Plus a vast
range of rigs
and
accessories!*

All Leicester specials available at our showrooms
in Chelmsford (0245 381626/381673 — Glasgow
(041 445 3060) — Wigan (0942 713405) — Agent/
Leicester (0533 608189)

ARROW RADIO LTD

'The Best Deal in Amateur Radio!'

SAVE MONEY ON STAND S33

IN AT LAST!!

NEW ICOM IC-R1
Micro-size handheld
scanner 150KHz/
1300 Mhz
£399



NEW MK II AR1000

1000 channel Superscanner
8-1300Mhz
£249 inc. Dual band antenna
nicads and charger



NEW MK II HP100E

1000 Channel Superscanner
8-1300 Mhz
£249 inc. two antennas
VHF/UHF charger and nicads



IC-24ET



Stocks of this superb dual-
bander now in:
SPECIAL PACKAGE: IC24ET
with extended receiver 115-
170 Mhz — Nicad and charger
£389

SPECIAL OFFER!
FT7-47GX

Full UK spec inc. filters

£499

INTEREST FREE CREDIT

Many major items available with
interest free credit at one third
deposit balance over 9 months
(APR zero)

*Arrive welcome your part exchange equipment
in UK!! Call for the best deal!*



**WITH
SSB**

ICOM R-100 MOBILE SCANNER
50KHz to 1.8GHz — now in — **£499**

**SEE THE NEW
KENWOODS**

TH 77E
TH 27E
TH 47E

AT LAST!

AR3000
all mode
scanner now in
£765



AX700
Panoramic
scanner
£629



**WITH
SSB**

Standard version POA

SWR/POWER METERS

COMET

CM200 140/150 Mhz 15/50W£32.34
CM400 430/450 Mhz 15/50W£32.45
CM420 144-430 Mhz 15/60W£37.40
CD120 1.8/200 Mhz 15/60/200W£85
CD270 140/525 Mhz 15/60/200W£88.95

DAIWA

CN410M 3.5/150 Mhz 15/150W£81.72
CN460M 140/450 Mhz 15/50W£85.40
NS660P 1.8/150 Mhz PEP/RMS/AVG.£115
CN101 1.8/150 Mhz 15/50/1kW£79.50

REVEX

W520 1.8/200 Mhz 2/20/200W£55.95
W540 140/525 Mhz 4/20/200W£57.00
W570 1.6/1300 Mhz 5/20/200W PEP£114.00

**C528 STANDARD
DUAL-BANDER**



with **FREE** receive extended range
— 130-172, 350-470 & 890-960 Mhz

£379.00 with batt case.

*(We apologise for long delays due to world
demand for this superb radio)*

**COMET
ANTENNA**

'The effective aerial'

NEW

GPX2010 Highest Gain Dual Band Base antenna in the WORLD!!
7.9 Metres long 9.5dB/2M 13.2 dB/70cms£142.95

SEE IT ERECTED AT LEICESTER!!

CDS150 DISCONE in S/Steel 25/1300 Mhz ONLY£59.95
CHL72S NEW 2/Band BNC whip for Dual Band handhelds£11.85

NON RADIAL: Mobile antennas independent of vehicle ground plane

CHL21J 144/432 Mhz, Unity/2.15dB, 100W Only 29cms long£15.95
CHL23J 144/432 Mhz 2.15dB/3.8dB 100W Only .44 metres£17.95
CHL24J 144/432 Mhz 2.15dB/5 dB 100W 0.8 metres long£25.30
CHL250H 144/432 Mhz 3.0dB/5.5dB 200 Watt 0.95 metres long£32.80

2x4 Series + Triband mobile and base station antennas

2x4M 144/432 Mhz 4.5/7.2dB 150 watt 1.53 metres£37.65

2x4 SERIES + DUAL BANDERS featuring the unique super linear converter system

2x4MAX 144/432 Mhz 8.5dB/11.9dB 200 Watt 5.4 metres "N" G.£125.00

Fibre£125.00

2x4WX 144/432 Mhz 6.5/9.0dB 200W 3.18 metres Glassfibre£78.95

2x4SUPER II 144/432 Mhz 6.0/8.4dB 200W 2.43 metres Glassfibre£77.35

2x4FX Compact 144/432 Mhz 4.5/7.2dB 200W 1.79 metres£55.80

DUPLEX & TRIPLEXERS Zinc alloy chassis

CFX5140 50/144/432 Mhz 800/800/500 Watt PEP 55dB isolation£38.10

CF413N 432/1296 Mhz 500/200W PEP 55dB isolation "N"£38.65

CF416 144/432 Mhz 800/500 W PEP 60dB isolation£28.90

SR Series to order only. MONO BANDER MOBILE ANTENNAS

CA285 5/8 wave 3.5dB 300Watt 1.32 Metres Base loaded£15.00

CA287C 7/8 wave 5.2dB 200W 1.89 metres double co-phase£22.50

CA430TM 3 x 5/8 wave 432 Mhz 6.8dB 150W 1.47 metres£28.95

MONOBAND BASE ANTENNAS

ABC21 5/8 wave Ground Plane 144 Mhz 3.4dB 200W 1.4 metres£24.50

ABC22A 2 x 5/8 wave 144 Mhz 6.5dB 2.87 metres£38.00

ABC23 3 x 5/8 wave 144 Mhz 7.8dB 200 W 4.5 metres£58.50

ABC71 5/8 wave ground plane 432 Mhz 3.4dB .54 mtrs£21.56

ABC72 2 x 5/8 wave GP 432 Mhz 200W 5.8dB 1.07 metres£34.85

CA712EF 432 Mhz Twelve x Half wave! 9.5dB 3.10 metres£56.00

HF & 50 MHZ

CHA-5 Vertical with Loaded Radials for 80/40/20/15/10 M 200W SSB 5.29

Metres. Features trifilar wound toroidal core£218.95

S2HB4 4 EL HB9CV Beam 10.4dB for 50 MHZ 400W SSB 3.2M£87.00

CBL30 HF 1.7 — 30 Mhz Balun 1:1 1kw£28.95

CRZ/DISCONE & HANDHELD ANTENNAS

CRZ12DB A Unique wide band Active antenna 500Hz to 1500 Mhz 1.24

Metres with controller£98.30

CDS180 Discone 28-1300Mhz + TX 6/2/70/23£89.50

CRZ-07 Mobile Wide-band Active£88.50

HEAD OFFICE:

5 The Street, Hatfield Peverel, Chelmsford, Essex CM3 2EJ

Tel: 0245 381626/381673 Fax: 0245 381436

Hours: 9-5 (Closed Thursdays)



YOUR ORDER CAN BE TELEPHONED WITH CREDIT
CARD DETAILS & DESPATCHED IMMEDIATELY!

FREE FINANCE ON MANY MAJOR ITEMS AT RRP.

(Ask for details of qualifying items —
see examples above).

BRANCHES:

GLASGOW: Unit 17, Six Harmony Row, Govan,
Glasgow, Scotland G51 3BA. Tel: 041 445 3060.

Hours 8.30-5.30 Mon-Fri (closed Saturday)

WIGAN: Greensway Arcade, Gerrard Street, Ashton-

in-Makerfield, Wigan, Lancs. Tel: 0942 713405

LEICESTER: OAVE FOSTER (Agent). Tel: 0533

608189. Latest calls 8.30pm please!

Waters & Stanton

BEST PRICES! FAST MAIL ORDER


**0702 206835
or 204965**

ALINCO
JUPITER
REVEX
MIZUHO
AZDEN
JAYBEAM
ICOM
YAesu
KENWOOD

SAGANT
ADONIS
SONY
PANASONIC
DATONG
TONNA
DIAMOND
PAKRATT
AOR
ERA

ALINCO

**2M 45W Lowest Priced!
FM Mobile
DR-110E
£269**

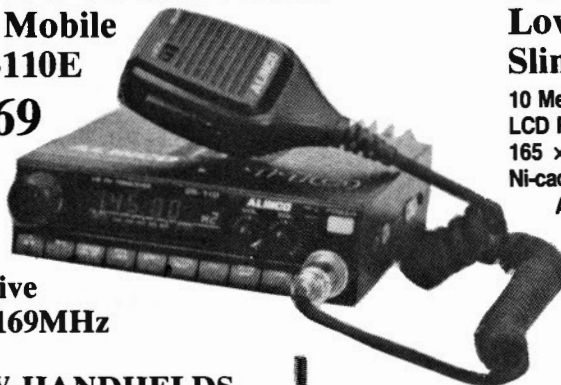

**Receive
130-169MHz**

NEW HANDHELDS

DJ-160E 2M

This highly attractive 2 metre handy is packed with features that make other rigs look expensive. For the man who wants everything at a sensible price, this is the one! Whether you admire its sleek lines, its DTMF encoder, its multi-function keyboard or its value, you cannot help but be amazed at how much has been packed into such a small space. Send today for brochure.



£219

Key-pad
21 memories
DTMF
Extended Rx.
Rotary Tune
DC-DC
Battery Saver
Priority
Scanning
Programmable

DJ-460E 70CM

Now you can have a full feature 70cms hand-held at a realistic price. It offers more features and better value than any other model. Send for brochure.



£229

LEICESTER SHOW DEALS!

We can offer some super deals to visitors at the Leicester Show. Don't buy a thing until you have got our quote and our promise of full UK after sales service! It all adds up to a Good Deal!

**DJ-120E
2M FM
3W Handy
Low Price
Slimline**

10 Memories
LCD Readout
165 x 60 x 30mm
Ni-cads

AC charger

£179



DIAMOND ANTENNA

SUPER BASE AERIALS

These superb Diamond aerials are beautifully constructed of fibre glass by the leading manufacturer of aerials in Japan (unlike some "comic" aerials which have to be glued together!). Each one covers 2m and 70cms and are broad banded and pre-tuned. Each model will handle 200 Watts and comes with all hardware and weather shroudings.

X-700 £195.00

The largest model made! It provides 9.3dB of gain on 2m and 13dB of gain on 70cms. Total length is 7.2 metres and the aerial is packed down in three sections.

X-500 £129.00

Ideal for many locations this will put a beefy signal in all directions. Gain is 8.3dB on 2m and 11.7dB on 70cms. Total length is 5.2 metres. The aerial is packed in 3 lengths.

X-300 £89.00

Compact yet gainy! 8.5dB on 2m and 8dB on 70cms. This two section aerial has a length of 2.5m.

X-50 £59.00

Supplied in one section only 1.7m long. It has a gain of 4.8dB on 2m and 7.2dB on 70cms.

DIAMOND SUPER VSWR METERS



Superbly designed and used in industry, you won't find better value for money! Each one reads direct power including P.E.P.

SX-200 £65.00

The "workhorse" of the range. This covers 1.8-200MHz with an accuracy of 5%. Ideal for hf and vhf it has power ranges of 5, 20 and 200 Watts.

SX-400 £79.00

The ideal meter for the VHF and UHF enthusiast. It covers 140-525MHz with an accuracy of 5%. Power rating is 5, 20 and 200 Watts.

SX-600 £119.00

This meter covers most operator's requirements. It covers the range from 1.8-525MHz. Power readings are 5, 20 and 200 Watts. Total range accuracy is 10%.

**DUALBANDER
DR510
2M/70cm**

At last a dual bander that you can afford! This latest model from ALINCO offers full duplex on 2 metres and 70cms. 45 and 35 Watts output ensure long range contacts. The digital display is superb and there is a proper rotary control for frequency selection. What is more it is very small and will fit most cars. Supplied complete with mic, etc.

FULL DUPLEX



£399

**PHONE
FOR
QUOTES!**

Retail & Mail Order: 18-20 Main Road, Hockley, Essex SS5 4QS. Tel: (0702) 206835/204965

Retail Only: 12 North Street, Hornchurch, Essex. Tel: (04024) 44765

VISA & ACCESS MAIL ORDER. 24 Hour Answerphone. Open 6 days a Week 9am-5.30pm.

Rail: Liverpool St./Hockley or District Line/Hornchurch.

**PHONE
FOR
QUOTES!**

ALL MAJOR BRANDS STOCKED

LARGEST IN SOUTH EAST

**184 PAGES
PACKED WITH
COMPONENTS,
KITS, TEST
EQUIPMENT
AND BOOKS...**

BATTERIES

Ni-cad, Dry Cell, Ni-cad Chargers, Eliminators, Holders, Connections

BOOKS

General, Textbook and Basics, Radio and TV, Data/Reference, Projects/DIY, Measurement/Servicing, Linear Electronics, Audio, Digital Electronics, Computers

CABLE AND WIRE

Equipment Wire, Mains Cable, RF Cable, Audio Cables, Ribbon Cable, Enamelled Copper Wire, Accessories

CAPACITORS

Electrolytic, Ceramic, Foil, Variable, Trimmers

COMPONENT PACKS COMPUTERS

Amstrad 464/6128 Peripherals, Software, Computer Leads, Cable Adapters/Testers, Data Switches, PC Cards, Microcomputing Kits/Modules, Accessories

CONNECTORS

Audio, Servo, DC, RF, RF Adapters, IEC Mains, 13A Mains, Low Current, Terminal Blocks, PCB Ribbon, IDC Edge, 0.1" Pitch Edge, IC Sockets, Waterproof Sockets

COUNTERS AND TIMERS

LCD Modules Stopwatch

CRYSTALS

Crystals, Ceramic Resonators

FILTERS

Ceramic, Pilot Tone/and Birdie, LC Video Block, Helical, Crystal, Ceramic, RF Interference

HARDWARE

Equipment Cases, Aluminium Boxes, Plastic Boxes, Mounting Accessories, Knobs, Breadboards, Fuses, Fuseholders, Heatsinks, DC Fans

INDUCTORS

Toko Coils, Fixed Inductors, Axial RF Chokes, Surface Mount Inductors, Moulded VHF Coils, Ferrite Materials, Dust Iron Toroids

KITS AND MODULES

FM Tuner Sets, FM IF Amplifiers, Digital Frequency Meters, TV and Video Systems, Aerial Amplifiers, AM Systems, HF Amplifiers, Signal Processors, 6m Systems, VHF Systems, Satellite Systems, UHF Systems, Audio Amplifiers, Audio Accessories, Cassette Systems, Home and Hobby, Radio Control Systems, RF Test Equipment,

"YOU NEVER KNEW THERE WAS SO MUCH IN IT"



**THE NEW WINTER
90/91 CATALOGUE
OUT NOW
FREE!**

**25W SOLDERING IRON
WORTH £5.98**

**WHEN YOU SUBSCRIBE
TO THIS AND THE NEXT TWO
ISSUES - FOR ONLY £5.00.
SIMPLY FILL IN THE
COUPON AND KEEP
UP TO DATE!**

Signal Generators and Detectors, Time and Frequency Standards, Logic Probes, Digital Meters, Power Supplies, LCD Modules

METERS

Moving Coil

PCBs & EQUIPMENT

Prototyping Systems, Artwork Materials

RELAYS

Coaxial, PCB

RESISTORS

Carbon Film, Presets, Rotary Pots, Slide Pots, Multiturn Pots, Precision Pots

RIGS AND RECEIVERS

2m Systems, High Power HF ATUs, Accessories, Scanning Receivers

SEMICONDUCTORS

4000 Series CMOS Devices, 74HC Series, 74LS Series TTL, Linear ICs,

Prescalers ICs, Microprocessors Memories, Transistors, Diodes Regulators and Power Control ICs, Schottky Diode Balanced Mixers, LEDs, Mounted LEDs, Infra Red LEDs, 7 Segment LED Displays, Neon and Signal Lamps

SPEAKERS/SOUNDERS

Piezo Buzzers, Headphones, Loudspeakers, Microphones

SWITCHES

Key, DIL, Push Button, Contact, Code, Rotary

TEST EQUIPMENT

Oscilloscopes, Frequency Meters, Signal Generators, AF and RF Generators, Analogue Multimeters, Digital Multimeters, Multimeter Accessories, RF Power Measurement, Digital Thermometers, Logic Probe and Pulsers, DC Power Supplies, LCR Meters, Oscilloscope Probes, Test Leads, Calculators

TOOLS

Soldering Irons, Soldering accessories, Drills and accessories, Screwdrivers, General Tools, Static Protection, Service Aids

TRANSFORMERS

PCB Mounting, Chassis Mounting

- AVAILABLE FROM LARGER NEWSAGENTS OR DIRECT FROM CIRKIT
- £10 WORTH OF DISCOUNT VOUCHERS
- LOW COST MULTIMETERS
- MANY NEW PRODUCTS

Cirkit

Cirkit Distribution Ltd

Park Lane, Broxbourne, Herts EN10 7NQ
(0992) 444111



Please supply:

- ☐ Winter '90/91 Catalogue @ £1.60
☐ Winter '90/91 Catalogue and subscription to the next two issues @ £5.00

I enclose Cheque/Postal Order for _____

Please debit my Access/Visa card for _____

NAME: _____

ADDRESS: _____

POST CODE _____

ACCESS OR VISA

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

EXPIRY DATE: _____

SIGNATURE: _____

DATE: _____

YAESU
ICOM
Authorised Dealer



MARTIN LYNCH

G4HKS

THE AMATEUR RADIO EXCHANGE CENTRE

286 Northfield Avenue, Ealing, London W5 4UB. Tel: 081 566 1120 Fax: 081 566 1207

AMSTRAD

STANDARD

Authorised Dealer



ATTENTION ALL ICR7000 OWNERS!!

Had HF fitted to your ICF7000? YES or NO, then how about a modification that converts the 100Hz increment button to **10Hz tuning on SSB** - resolve FAX and data transmissions on HF and VHF that were impossible before! Drastically improves the "fine tuning" on USB/LSB. Also allows the SSB button on the front panel to select USB or LSB.

* ICR710Hz Module Installed for only £69.00 incl VAT

New Mk4 HF module now available for the ICR7000. Full 500kHz to 2GHz coverage, plus 100 extra memories. **ONLY £139.00 Installed.**

* **Special offer - Both HF and 10Hz mods for only £199.00 ***

ICR7000HF receiver, supplied complete with both modifications, List £1197.00
Special offer only £1039.00, HP Available.


Full range of products available, if you see the item you want advertised in this magazine, then ring me. I'm paying HIGH prices for good, used equipment - Ring now!

*THE EDITORIAL AND ADVERTISING TEAMS ON PRACTICAL WIRELESS AND
SHORT WAVE MAGAZINE LOOK FORWARD TO SEEING READERS AND
ADVERTISERS AT STAND 3 AT THIS YEAR'S LEICESTER SHOW
ON 26 & 27 OCTOBER.*

*FOR YOUR FREE PULL-OUT AND GUIDE FOR THE SHOW,
TURN TO THE CENTRE-SPREAD OF THIS ISSUE.*

C.M.HOWES COMMUNICATIONS

ADD SHORTWAVE TO YOUR SCANNER!

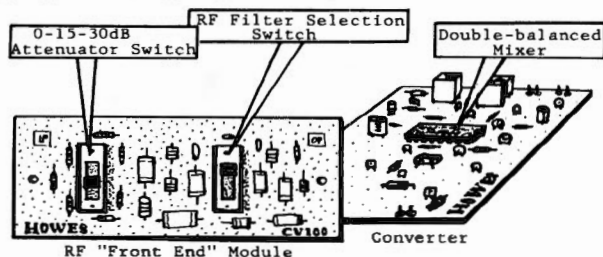

NEW! HOWES CV100

The new **HOWES CV100** converts medium and short wave signals to VHF so that they can be tuned with a normal scanning receiver. The CV100 adds 100MHz to the incoming frequency. For example: to listen to amateurs on 29.6MHz FM, simply tune your scanner to 129.6MHz and select NBFM. With the CV100 connected between your receiver and a suitable antenna, you will now receive any signal appearing on the 29.6MHz FM calling channel. With good propagation conditions, the signals you hear can come from almost anywhere in the World! To listen to an AM broadcast on 7.150MHz, simply tune your scanner to 107.150MHz and select AM mode, the CV100 has added 100MHz to the incoming frequency. There are no modifications to the receiver, the CV100 simply connects between its antenna socket and a suitable antenna (HOWES AA2 etc). All the receiver's normal functions are retained. A switched RF attenuator and RF filter selection are the only operational controls on the CV100.

- ★ Input frequency range 1 to 40MHz.
- ★ Output frequency range 101 to 140MHz.
- ★ Crystal controlled converter with SL6440 mixer.
- ★ RF input filters and switched attenuator.
- ★ Requires 12 to 14V DC supply.
- ★ Easy to build kit, or ready built modules.

If you would like to upgrade the frequency coverage of your scanner, then the HOWES CV100 could be the ideal way of adding extra bands without the cost of buying an additional receiver. Performance is excellent.

CV100 Kit: £25.90

Assembled modules: £35.90

Mail order to: **EYDON, DAVENTRY**
NORTHANTS NN11 6PT
Tel: 0327 60178



AA4 ACTIVE ANTENNA for SCANNERS!

The **HOWES AA4** Active antenna gives full coverage from 25 to 1300MHz. It is designed to be the ideal solution for those requiring a compact, broadband antenna for use with scanning receivers. The AA4 features advanced technology with a low noise microwave IC as the active element.

- ★ Fully broad-band covering 25 to 1300MHz
- ★ Low noise microwave IC (NF <3dB). Over 15dB gain.
- ★ Third order intercept +15dB at 500MHz.
- ★ Coax powering 12 to 14V DC at less than 20mA.
- ★ 10dB switched attenuator on the receiver interface board.
- ★ Antenna elements ready formed on printed circuits for easy construction.
- ★ Size approx 16 inches long, 1.2 inches wide.
- ★ Easy to build kit, or ready built modules.

If your scanner reception could benefit from the addition of a remotely located broad-band antenna with built in pre-amplifier or you would like a much neater, more compact alternative to the large, ugly discone types, then the **HOWES AA4** could be just the job! Excellent performance in a small space!

AA4 kit: £18.80

Assembled PCB modules: £24.90

AA2 ACTIVE ANTENNA for 150kHz to 30MHz

The **HOWES AA2** is the active antenna to use with a general coverage HF receiver. Broad-band performance that does not tail off at the higher frequencies. The neat compact answer for those with limited space, holiday use, mobile operation etc. Two selectable gain settings, local or coax powering (12 to 14V), easy to build, and much liked by customers!

AA2 kit: £7.50

Assembled PCB module: £11.50

PLEASE ADD £1.00 P&P to your total order value.

THE NOVICE LICENCE IS COMING!

A new cheaper, simpler way to get "on the air" on the amateur bands! We have been supplying novice type equipment for nearly eight years, so there is a good selection of suitable kits in our range. You could start building your station now! Please send an SAE for the free catalogue! Sales and technical advice are available by phone during office hours - you can actually speak to people who know what they are talking about!

All **HOWES KITS** contain a good quality printed circuit board with screen printed parts locations, full instructions and all board mounted components. Our kits offer the challenge and satisfaction of home construction, with the reassurance of help if you need it.

73 from Dave G4KQH, Technical Manager

Keylines

In recent years I've suffered the all-too-common problem that comes the way of people who like their food - an expanding waist. My waistline unfortunately reflects all the delicious 'goodies' that my wife - an excellent cook - prepares. I'm one of those people who'll always enjoy a big, well prepared meal and not worry (at the time) about the consequences.

Unfortunately, the 1990 *PW* issues have been 'overfeeding' the binders designed specifically for the 'normal' size magazine. We had hoped that all 12 issues would fit into the binders. However, we were pleased to be able to produce 'bumper' size issues to provide you with much good reading. But, as a direct result of the larger magazines, we now have to face the fact that readers will have to 'carry over' one or two issues from this year's volume, into the 1991 binder.

Although I apologise to those of you who will be annoyed with us for making *PW* so big, in another sense I'm pleased that despite the severe recession that's affecting the UK as a whole - we've been able to pack so much in.


Sorry for the 'tight squeeze', but I know many of you appreciate our efforts to pack as much as we can into a very small space every month.

Tight Specifications

Thinking about the binders being 'out of spec' for the larger sized issues, has reminded me of a recent meeting I attended at the Potter's Bar Headquarters of the RSGB. Those attending the meeting had been invited to discuss suitable kits and specifications applicable to the forthcoming Novice Licence.

I was delighted to attend the meeting, and it was a pleasure to see many of the 'faces behind the names' so to speak. We were given a 'pottered' history of the Novice Licence before the subject of the specialised training courses were explained.

The emphasis for the Novice course is 'hands on'

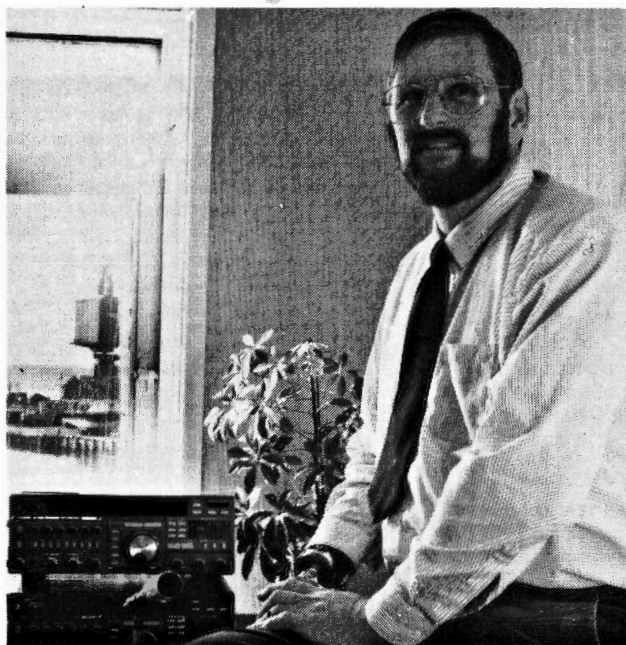

Rob Mannion G3XFD

all the time and I was particularly interested to see some of the novel techniques that will be used during the course. This aspect of the Novice training sessions will, I feel sure, breathe much new life into our hobby.

But, I must stress that I came away from the meeting with the feeling that the proposed specifications for kits aimed at the Novice are too tight. I don't propose to mention the various figures that were discussed because I'm hoping that they can be relaxed considerably.

I was also surprised that the meeting arranged by the RSGB had not been arranged much earlier. It seemed rather 'late in the day' to arrange such an important liaison event to discuss kits and their specifications only some six months before the proposed introduction of the new licence.

Main Worry

My main concern and worry is not that the specifica-

tions can't be met, they surely can be - but at what cost? Surely - for the sake of the hobby - we must endeavour to keep prices down as low as possible!

Within a few days of the meeting at RSGB headquarters, I had heard from several people who are directly involved in the manufacturing and selling of kits. One respected (and very professional in approach) manufacturer stated categorically that yes, he could make a kit to the suggested specifications but one filter alone could cost more than one of his present - high quality - kits.

Ideally the RSGB will eventually mark the agreed (somewhat relaxed I hope!) specifications with some sort of amateur radio 'Kite Mark'.

Orderly House

We would all like to keep our own house in order and the RSGB, anxious of course to save the members money, would like to see this small

section of the amateur radio market regulating itself.

In my mind this is an excellent proposal **PROVIDED** that the specification burden on the industry is not too great. We'll soon see the results, for you can be sure the specifications will be reflected in the price.

All the manufacturers present at the meeting stated that they would prefer to abide by a standard that would allow self-regulation in the industry.

Such self-regulation removes unwieldy bureaucracy. I feel that the kit manufacturers co-operation, must be backed by a specification that is commercially viable. This is essential for an industry that is (with due respect) dominated by small businessmen working to very tight profit margins. Let's help them by loosening the specification 'belt' at least.

It must be obvious to anyone reading 'Keylines' this month, that I place a great deal of importance on the Novice

Licence. The value of the 'new blood' that will - hopefully - be attracted to the radio hobby by the bold, new initiative will help to carry the hobby into the new century.

Without the 'invisible' army of instructors however, the scheme would undoubtedly never be launched - let alone float!

The instructors will be gladly giving up their time and expertise to encourage the newcomers. In many cases, the instructors will be paying out a great deal - in time and money - to make the necessary teaching aids.

Every instructor will be a volunteer. They'll be backing Amateur Radio, the RSGB and last - but certainly not least - the radio enthusiasts of the future. Surely then the instructor should at least be given the necessary Novice Licence course book?

Of course I realise that the RSGB has to pay 'up front' for the manuals and this has had to come out of membership money. But surely the teacher should not have to pay for his apple?

I have discussed this problem at length with David Evans G3OUF, Chief Executive and General Secretary of the RSGB. In my mind the answer lies not in the soil - but in sponsorship. Members of the RSGB - myself included - must seek a sponsor willing to help pay for this vital initiative.

Individual sponsors for instructors might come forward, but the project needs further sponsorship in a very big way. This would allow the RSGB to give their essential support, by freely providing each instructor with the necessary training manual and teaching aids.

I'm on the look-out for further sponsors to help take our hobby into its second century...are you?

We apologise that 'What is Propagation' has been held over this month.

73 DE G3XFD

Receiving You...

★★★★★STAR LETTER★★★★★

Dear Sir

A bit of a word from a lonely s.w.l. in Sri Lanka. Sir, first of all I wish to introduce myself to you. I am Asantha Cooray, 16 years old, student in one of the leading schools in Colombo, capital of Sri Lanka.

I thought of writing to you some months ago, but didn't have a chance, but finally I got my mind to write to you and raise some points.

I have been reading *PW* for the past two years, since I started short wave listening and DXing, at the British Council Library. As I wasn't able to subscribe for the magazine due to several reasons, I go to the library to have a look at it, and see what is on.

As a s.w.l., I found the magazine was quite useful. I really liked your latest format, which made *PW* easy to read. One of my favourites is the 'HF Bands' and also 'Broadcast Round-up' helped a lot.

Now to the main point, as a s.w.l. I used to send QSL cards, and still do, to radio amateurs, but what I expected first seems not to be happening. For the past year I have sent out about eighty cards, but receiving QSLs doesn't come up to the same number.

I don't know why amateurs are not sending QSLs to s.w.l.s who send QSLs to them. Many seem to be not in need of s.w.l. QSLs, which is equally the same as an amateur transmitter QSL.

Due to this reason, I have learned that many s.w.l.s have stopped sending cards. So as a s.w.l. I request you Sir, as an amateur, to think about this, and from myself I request that all your readers don't stop QSLing to s.w.l.s and not to ignore their QSLs.

Even inside Sri Lanka, there were about three s.w.l. who used to send out cards, but now according to the Radio Society of Sri Lanka I am the only s.w.l. who is still doing so. I am also happy to let you know that I am the youngest member of the RSSL.

There are several reasons that many young people are not involved in this. One is that many don't know that there is something called Amateur Radio. Even amateurs themselves work in such a secret way that it seems that they don't want others to join in.

As in your country nothing has been done to promote the hobby, and another factor is the high price of equipment. Many enthusiasts use home-brewed equipment. I used to use a self-made oscillator and ran my portable radio to s.s.b., but later on I got hold of my uncle's Sony ICF-7600DS.

Finally before I say good bye to you sir, I wish to make a request. If there are any of your readers out there who would like to help me in some way, such as by sending old magazines, books, etc, I would really appreciate it. And most of all I wish to ask, is there any chance that you can send me *PW* freely or can a heartfull reader subscribe for me?

Goodbye.

Asantha Cooray, Colombo 10, Sri Lanka.

Editor's Comment: Asantha's letter, his manner and attitude impressed the *PW* team. The letter also raised a valid point regarding QSL cards. I know of course that this is not a new problem for either the licensed radio amateur or s.w.l., because I had the same problem in getting cards back 30 years ago. I can only suggest that we licensed operators help to encourage new and established listeners to enjoy their hobby by replying to their cards - **especially when they have International Reply Coupons attached.** We hope that Asantha will also enjoy the six-month *PW* subscription he's won as his special prize. **G3XFD.**

Send your letters to the Editorial Offices in Poole, the address is on our contents page. Writer of the Star Letter each month will receive a voucher worth £10 to spend on items from our PCB or Book Services, or on *PW* back numbers, binders, reprints or computer program cassettes. And there's a £5 voucher for every other letter published.

Letters must be original, and not duplicated to any other magazines. We reserve the right to edit or shorten any letter.

Brief letters may be filed via our Prestel Mailbox number 202671191. The views expressed in letters are not necessarily those of *Practical Wireless*.

Dear Sir

I thought that the letter from 17 year old Stuart Hipkin made some very telling points on why the hobby is not attracting young people to it.

The RSGB seems totally unable to appreciate what actually appeals to creative youngsters and his reaction to the Novice licence proposals highlights what is wrong with the proposals as they stand.

How about a campaign to get us back to the roots of the hobby with simple construction projects for c.w. and a.m. and pressure in the right quarters for recognition that a.m. users have a right to the frequencies available, in the same way as classic cars have a right to use the highways.

How about a 'Basic Equipment Constructors Club' for instance, or 'AM Revival Club', backed up with articles on both transistors and valve construction projects, and with suggested frequencies and bands for enthusiasts and of course aimed at newcomers to the hobby particularly.

Although 1.8MHz is the easy band to get going on, 70MHz is the band with virtually no occupancy and needs reviving.

Information on existing a.m. nets and enthusiasts for the more simple things in amateur radio could also be collated and included.

Although I have been

a member of the RSGB for many years I do not hold it in very high regard, and I certainly hold it responsible for the situation which is now agonising over the lack of recruitment to the hobby.

What do you think? I would be happy to help in any way I am able.

**Peter Simpkins G3MCL
Winchester
Hants**

Editor's comment:

G3MCL has a good argument regarding the use of a.m., especially as regards to 70MHz. We have some projects under way for v.h.f. but in the meantime if you have an a.m. net under way in your area - tell us about it! If you have a proven circuit for a simple a.m. transmitter for 50 or 70MHz - why not share it with us in the new 'What A Good Idea' circuits feature in *PW*?

Dear Sir

Although the condescending attitude of certain Class A licensees toward Class B licensees is already well documented in the amateur radio press, I should like to draw attention to what I regard as an equally unwarranted, but normally unmentioned, example of elitism/snobbery within our hobby.

Views such as those expressed by Stuart Hipkin ('Receiving You' -

September 1990), and many others, regrettably continue to prevail. So many, it would seem, are of the opinion that the only Radio Amateur truly worth his salt is the one who is committed to home construction.

I should at this stage point out that I would be the last to deny that home construction is an extremely laudable facet of our hobby, providing excitement and much satisfaction to its enthusiasts. However, I do not believe that those interested in it have any right to believe that it is they - and only they - who have a 'divine right' to the r.f. spectrum, or at least a moral priority to it.

To take my own case, one of the many interests in life is learning foreign languages, and I find that my access to the h.f. bands is invaluable in providing opportunities - without having to leave my own home - for using and practising those languages, albeit via the medium of a 'Black Box'!

What gives anyone the right to judge occupancy of part of the spectrum for these purposes any less worthy than for the testing and use of home-brew equipment?

The essence of what I am saying is that there can surely be a multitude of legitimate reasons for desiring access to amateur bands. In the final analysis, I believe that provided a licensee operates his station in a responsible manner, courteously and in accordance with the terms of his licence, the only ultimate justification required for access to the spectrum is that the licensee concerned desires access to it.

Amateur radio, as we all know, is a wonderful hobby. Let's all enjoy it,

Receiving You...

irrespective of the underlying causes of our individual interests. In-fighting never strengthened anything!

Many thanks for an excellent magazine. I've placed a regular order with my newsagent so as never to miss a copy.

Chris Hilton G4UPZ
Oakham
Leicestershire

Editor's Comment:

G4UPZ's letter reminds me of a quote in a world-famous book (still in print and selling very well) where a very respected teacher and counsellor said to his 'club members' (who were arguing who should eventually sit next to the 'chairman') that "There are many rooms in my father's mansion". We should bear the message in mind! In other words - there's room for all of us - whatever our own special interests in our many-faceted hobby!

Dear Sir

It's well known that the price of electronic equipment has fallen dramatically over the past few years. There is perhaps no better example than that of the digital watch.

In April 1975 *PW* announced that a British supplier had broken the then magical price barrier of £60. Scale that up in proportion to the increase in the cost of *PW* then and now and we have a price in real terms of £318 for telling the time electronically.

In 1966 it was stated that the frequency synthesiser was the preserve of the professional, typically used by broadcasting companies as a v.f.o. style transmitter input drive with Xtal accuracy. Employing 90 valves it produced every frequency from 1kHz to 30MHz in 1kHz steps. A wealthy radio amateur, we were told, could buy one for £1500, equivalent now to £18750.

A worthwhile parallel has been the drop in price of ex Ministry of Defence gear. July's *PW* carried an ad for receivers covering 1-20MHz which are presumably the type R209. In 1964 the asking price was £23-50 which equates with £376 now, quite a bit more than today's asking price of £60. The earliest reference to the R209 that I have seen dates from 1974, when Philips announced it as a civilian model FO509. Can any reader state what it cost then? Neither Philips nor the Vintage Wireless Co. has been able to help.

I have compiled for my own use what may be a unique listing of all ex Ministry of Defence equipment advertised in *PW* during the fifties, sixties and seventies by which time supplies had dwindled considerably. If any reader would like to dip into this index I will do what I can to help on receipt of a s.a.e., but copyright prohibits any photocopying.

Hilary Humphries
Newmarket, Suffolk

Dear Sir

The only thing more boring than one of the "all your equipment should be home-brew" is one barely out of his nappy.

An amateur radio licence enables one to operate under section one of the wireless telegraphy act. In other words, to behave in a reasonable manner whilst operating.

Home-brew or not home-brew is left to choice. Perhaps the writer of the letter in September's *PW* should gain a few years experience before sitting in judgement.

M. Charlton G0MDF
Hulthwaite
Notts

Competition Corner


When you've read the Dewsbury Electronics Supa-Tuta review on page 29 - you have an excellent opportunity to win one of these marvellous Morse training aids for yourself. For a change - and just to be a little sneaky - we've hidden the competition throughout the editorial pages of *PW*.

The competition takes the form of Morse characters spelling out a message. There'll be no more than one Morse character on each of the pages used in the competition and the characters will be in letter order.

To enter the competition find all the characters and then decode the message. Send your decoded letters together with the page number you found them and your name and address on a plain postcard to: **Supa-Tuta Competition, Practical Wireless, Enefco House, The Quay, Poole, Dorset BH15 1PP to reach us no later than Monday November 19.**

The first correct entry drawn out of a 'hat' will receive a Supa-Tuta, kindly donated by Dewsbury Electronics. The four runners-up will receive 1 year subscriptions to *PW*. The winner and runners-up will be notified by post and the results will appear in the January 1991 issue, on sale December 13. Best of luck and Da-Di-Dah!

Packet

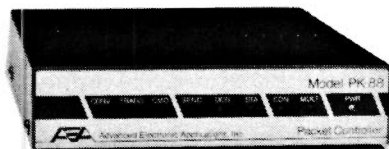

PK-88 Packet TNC

Unique operating features combined with proven hardware and software design make the PK-88 your best choice in packet radio. It allows multiple single frequency QSOs, digipeating and networking.

- All metal case for reduced RFI
- HF modem included
- Advanced, 18 KByte non-volatile personal mailbox
- TCP/IP and NET/ROM compatible

- Comprehensive front panel status indication
- Numerous special commands not offered by competitive equipment
- Unique Host Mode computer interaction
- Continuous product enhancements

PRICE INCLUDES FREE IBM-PC AND CBM-64 TERMINAL SOFTWARE ON DISKETTE

PK-88: £129.95 inc. VAT (£5.00 post and packing)



ICS Electronics Ltd. Unit V, Rudford Industrial Estate, Ford, Arundel, West Sussex BN18 0BD

Telephone: 0903 731101 Facsimile: 0903 731105



Newsdesk '90

Howes AA4 Active Antenna

The Howes AA4 Active Antenna is designed for users of scanning receivers who require a compact antenna giving a wide frequency coverage.

The frequency range is 25 to 1300MHz. The antenna is only 409mm long by 30.5mm wide and incorporates a low noise microwave integrated circuit amplifier. The i.c. noise figure is less than 3dB rising to about 3.2dB at 1300MHz. Gain is more than 15dB over the entire range. A 10dB switched attenuator is provided on the receiver interface board. This interface board takes a 12 to 14V d.c. power input and feeds the power up the coaxial cable to the antenna.

The Howes AA4 cost £18.80 in kit form, or £24.90 as built and tested p.c.b. modules. Post and packing charge is £1.00 when ordered by mail from C. M. Howes Communications. Kits are also available from the many Howes Kit stockists around the country and at most radio rallies.

An information sheet on the AA4 and a copy of the Howes Kit Catalogue is available by sending an s.a.e. to the address below. Telephone sales and technical advice is available by phoning the number below during normal office hours.

**C. M. Howes Communications, Eydon, Daventry,
Northants NN11 6PT
Tel: (0327) 60178**

Gulf Link

BBC World Service's new *Gulf Link* programme is standing by ready to take calls from British people with friends and family members in Iraq and Kuwait. The number to call is 071-257 2373 and the line is open from 9am to 6pm. People can also send their messages by FAX to 071-836 5195. The first edition of *Gulf Link* presented by Chris Loosemore went on air on Friday September 7 at 1645UTC and focused on the work of the Gulf Support Centre in London. The programmes, including personal messages, started the following Monday and are broadcast every weekday at the same time, with a repeat the following morning at 0445UTC. *Gulf Link* follows the pattern established during the Falklands conflict by the *Calling the Falklands* programme. It is produced by the same World Service department Topical Tapes.

STOP PRESS: Due to demand, extra programmes are now scheduled for weekends.

Marco Trading

The Marco Trading 1991 Electronic Components and Equipment Catalogue arrived in the offices recently. Once again this catalogue includes many new and exciting lines and is available at £1.50 post paid.

Further details from:

**Marco Trading
The Maltings
High Street
Wem
Shrewsbury SY4 5EN.
Tel: (0939) 32763**

Maplin 1991 Catalogue

The Maplin 1991 Buyers Guide to Electronic Components is now available at WH Smith, Maplin shops or direct by mail order, at £2.45 a copy.

With over 600 action and bargain packed pages featuring new product lines such as Kodak films and Olympus cameras, Pro-Sound car/radio/cassette/

speakers, satellite receivers, 'watch as you build' cassette-based learning courses. Meanwhile extended product ranges include batteries, books, cables, protection devices tools and projects are laid out as before.

**Doug Simmons
Maplin Electronics
PO Box 3
Rayleigh
Essex SS6 8LR
Tel: (0702) 554155**

Do-It-Yourself

The latest Maplin project is the digital speech record and playback module. A novel and versatile project which can store speech digitally and then play it back at the push of a button. The project is based around the UM5100 digital voice recorder and playback i.c.

Digital recording has the advantage over tape recording as there is no mechanical wear and tear. Applications include voice message pads, security systems and telecommunications. The onboard 32K SRAM memory will store between 5 and 20 seconds of speech (depending on sampling rate).

The module can be further expanded with an EPROM programmer module, which will allow non-volatile storage of speech in EPROM. An additional playback-only module is available, which does not incorporate the record circuitry and is intended for use with speech stored in EPROM. Just the thing for a contest call! Available from Maplin shops or by mail order.

For further information, please contact:

**Doug Simmons
Marketing Director, Maplin Electronics plc
Tel: (0702) 554155**

Fax and Weather Satellites

Previously, FAX on a Spectrum has meant using the very poor, low resolution screen display, showing only a small part of a chart and with no grey shading for pictures.

Now, by simply using the system just introduced by Technical Software with a standard, Epson-compatible dot matrix printer, you can produce full resolution charts, press photos and weather satellite pictures on any 48K or 128K Spectrum computer. The pictures are reproduced with excellent grey shading, giving near photographic results.

The software is very easy to use with the screen displaying all the current settings and operational status. It is supplied either on tape or Spectrum +3 disk but may be copied to other formats if required.

The price is £40.00 for the SIA-2 interface adapter board and the software on tape or £42.00 if on +3 disk. To receive FAX, the Spectrum FAX interface is £40.00 and for weather satellites, the APT-1 weather satellite decoding module is £59.00. Full instructions are supplied.

**Technical Software
Fron
Upper Llandwrog
Caernarfon
Gwynedd LL54 7RF
Tel: (0286) 881886**

New Soldering Iron

Just introduced by Greenwood/Oryx is a new addition to its range of Skylab soldering products. Developed to meet the stringent COSH regulations to limit fume emissions during soldering, the Skylab fume extract soldering iron has been designed to extract fumes directly from the area of the tip itself - virtually eliminating the possibility of harmful gases escaping into the atmosphere.

Featuring a light-weight ergonomic design, the iron uses the same advanced tip configuration as the standard Skylab soldering iron which actually incorporates the heating element within the tip.

The extraction pipe is unobtrusively integrated into the tool itself and can be adjusted or replaced in seconds if required.

Easily replaceable extension plastics piping is attached to the electric cable for connection to standard fume extract systems.

The new iron can be driven by either the DD or GD skylab soldering stations. For further details, contact:

**Alan Cooke-Sanderson
Greenwood Electronics
Portman Road
Reading
Berkshire RG3 1NE
Tel: (0734) 595843**

G4TJB QSL Cards

Cartoon DIY cards each featuring a different aspect of amateur radio are now available from 'G4TJB QSL Cards'. These are on sale at £3.50 matt and £4.50 gloss per pack of 100.

**'G4TJB QSL Cards'
24 Portishead Rd
Worle
Weston-Super-Mare
Avon BS22 0UX
Tel: (0934) 512757**



Powerful and Portable

Weighing less than 10kg and with at least 4 hours of operation from built-in rechargeable batteries, Bruel & Kjaer's NEW Real-time Frequency Analyser Type 2143 is the ideal analyser for acoustical and vibration measurements in the field and in the laboratory.

Type 2143 operates in real-time with bandwidths down to $1/24$ octave and is able to read 1000 spectra per second into non-volatile memory, thus making it both an excellent analyser and a powerful data-gathering device. The memory capacity in the standard unit is sufficient for $512\frac{1}{3}$ octave spectra.

The built-in PC/MS-DOS compatible disk-drive makes it easy to store the measured data and can be used to transfer data to other equipment. Type 2143 is operated by means of user-interactive menus, while a system of on-screen help pages enables even a novice user to realise the full potential of the analyser in the field. Type 2143 has further control and data-processing possibilities via the IEEE-488 and RS 232C interfaces.

In sort, Real-time Frequency Analyser Type 2143 is the logical choice when portability, powerful measurement, signal analysis and data collection are required.

Price £12212 excluding VAT but including post and packaging.


Bruel & Kjaer (UK) Ltd
Harrow Weald Lodge
92 Uxbridge Road
Harrow
Middlesex HA3 6BZ
Tel: 081-954 2366

Periphex inc

Manufacturing both amateur and commercial battery packs for hand-held radios, 'Periphex inc' also sell premium battery packs for the radio controlled model industry, camcorder batteries and individual cells. For more details, contact them at:

149 Palmer Rd
Southbury, CT 06488
Tel: (203) 264-3985
Fax: (203) 262-6943

Newsdesk '90

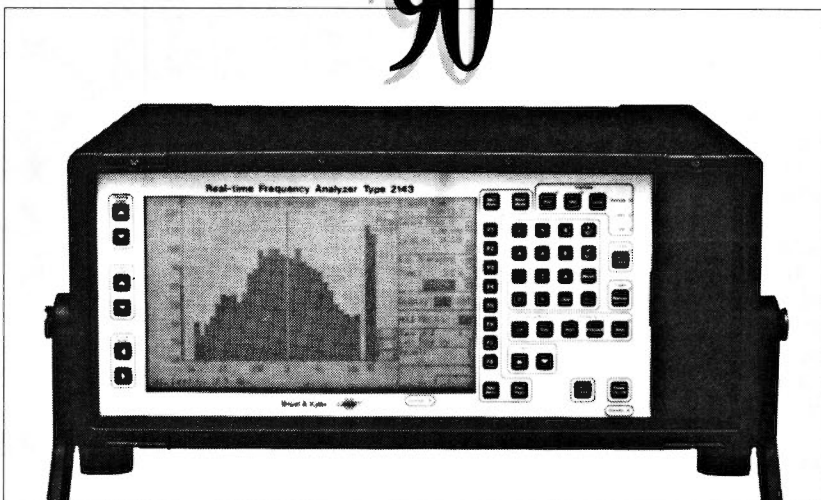

Undercarpet Telephone Cable

Announced by CableMaster is a new undercarpet telephone cable which meets BT specification CW1316. A low-profile 6-core product, it is designed to lay flat on wooden, concrete or tiled floors - thus reducing installation costs and enabling the extension of essential communications

services with minimal disruption.

The cable has excellent cut-through and abrasion resistance and is unaffected by moisture, steam or carpet-cleaning fluids.

Each conductor is of 1/0.5mm plain annealed copper wire insulated with radiation cross-linked pvc to a radial thickness of 0.15mm.

Conductors are laid up in parallel with a radiation

cross-linked pvc outer sheath. Max conductor resistance is 90.4Ω/km at 20°C and capacitance between adjacent cores at audio frequencies is 50 to 80pF/m.

For further details, contact:

CableMaster
Edinburgh Way
Harlow
Essex CM20 2DF
Tel: (0279) 639639.

A New Emporium

Martin Lynch started in amateur radio some twenty years ago as a short wave listener from his father's garden shed in Ealing, West London. His primary interest was listening on the v.h.f. amateur bands, eventually getting his first callsign G8JNV. Working through his apprenticeship with Rascal BBC in Wembley, he built a lot of his own equipment and passed the Morse test acquiring the callsign G4HKS in 1978. From 16 years old, Martin was well known in the area for buying and selling used amateur equipment - in those days AR88D's, 1155's and Creed 7B's.

In September of this year, Martin opened his own retail showroom, specialising in new and used amateur radio equipment, together with computers, hi-fi and video.

The location was very important. The showroom is situated in Northfields Avenue, the same road that 'Amateur Radio Exchange' was in originally. Parking is easy and it is centrally positioned. There are bus stops and Northfields Tube is literally a hundreds yards away.

The showroom area is large with lots of display benches, all wired up for instant demonstration of equipment. The company called 'Martin Lynch' will bring back the flavour of 'exchange' as it used to be in years gone by. Goods can either be sold on behalf of a customer (i.e. on a commission basis) or exchanged/bought outright for cash. The company will also specialise in modifications of equipment to further enhance operation.

The usual array of accessories is on display and what the shop does not hold in stock can normally be obtained within 24 hours.

Martin Lynch welcomes any calls, whether it be for advice on new or used equipment, or just an informal chat between old faces seen in the not too distant past!

Opening times are Tuesday to Saturday 10am to 6pm, closed all day Sunday and Monday. The address is:

286 Northfield Avenue
Ealing, London W5 4UB.
Tel: 081-566 1120. Fax: 081-566 1207

Services

Queries

We will always try to help readers having difficulties with a *Practical Wireless* project, but please note the following simple rules:

- 1: We cannot give advice on modifications to our designs, nor on commercial radio, TV or electronic equipment.
- 2: We cannot deal with technical queries over the telephone.
- 3: All letters asking for advice must be accompanied by a stamped, self-addressed envelope (or envelope plus IRCs for overseas readers).
- 4: Make sure you describe the query adequately.
- 5: Only one query per letter please.

Back Numbers & Binders

Limited stocks of many issues of *PW* for the past years are available at £1.65 each including post and packing.

Binders, each holding one volume of *PW*, are available price £4.50 each (£1 P&P for one, £2 for two or more).

Send all orders to the Post Sales Department.

Subscriptions

Subscriptions are available both for the UK and overseas. Please see current issues for the latest prices.

Constructional Projects

Each constructional project is given a rating to guide readers as to its complexity.

Beginner: A project that can be tackled by a beginner who is able to identify components and handle a soldering iron fairly competently.

Intermediate: A fair degree of experience in building electronic or radio projects is assumed, but only basic test equipment is needed to complete any tests and adjustments.

Advanced: A project likely to appeal to an experienced constructor and often requiring access to workshop facilities and test equipment for construction, testing and alignment. Definitely not recommended for a beginner to tackle on their own.

Components for our projects are usually available from advertisers. For more difficult items a source will be suggested in the article. Kits for many of our recent projects are available from CPL Electronics and FJP KITS, both of who advertise in the magazine. The printed circuit boards are available, mail order, from the Post Sales Department.

Mail Order

All *PW* services are available Mail Order, either by post or using the 24hr Mail Order Hotline (0202) 665524. Payment should be by cheque (overseas orders must be drawn on a London Clearing Bank), Access, Mastercard or Visa please.

Wireless Line

This is an information service for the radio enthusiast, updated each Friday. Calls cost 44p per minute peak time and 33p per minute off-peak. The number to ring is: (0898) 654632.

Newsdesk '90

Two New Kits

In the latest edition of their catalogue, Lake Electronics announce the introduction of two new kits to their QRP range.

The DTR7 is a single band transceiver with 2 watts output on 7MHz. Featuring a stable v.f.o., sensitive receiver, sidetone, r.i.t. and a passive audio filter. The kit comes complete with not only all components but with the hardware!

Compact and lightweight - an ideal rig for

portable work.

The PM20 power meter combines a 50Ω dummy load with a sensitive wattmeter reading from 25 milliwatts to 20 watts, over the range 10kHz to 150MHz.

The DTR7 kit is priced at £84.50 and the PM20 kit at £19.50. Both prices include postage.

For a free copy of the catalogue, send an s.a.e. to:

Lake Electronics
7 Middleton Close
Nuthall
Nottingham NG16 1BX



Label Service

Able-Label can now offer radio amateurs and short wave listeners a special self-adhesive label service. 500 printed black on white costs £5.75 and 500 printed black on gold costs £6.25 (both prices include CQ design if required). They offer 12 different label designs and you can get further details from:

Steepleprint Ltd
Earls Barton
Northampton NN6 0LS
Tel: (0604) 810781



A Measure of Quality

Now freely available from Alpha Electronics is a new brochure relating to their BS5750 Test Equipment Repair and Re-Calibration services. Alpha repair and maintain all types of instrumentation, both electrical and electronic, oscilloscopes up to 150MHz bandwidth both real-time and storage, all types of analogue and digital multimeters, as well as specialist electrical test sets. The brochure gives useful details of Alpha's location and facilities, including a local pick up and delivery service in many areas.

For further information, please contact:

Fred Hutchinson
Quiswood Ltd
Tel: (0756) 799737

New Standard C5608D

With the new standard C5608D it is possible to programme all functions from the l.c.d., keypad, hand microphone, as well as the main unit. Some of its facilities include 20 memories, two scan modes, programmable wide band receive and a.m. for airband listening. It incorporates (when programmed) cell phones between 800-1000MHz.

Being two separate bands in one box, it has two speaker outputs, it is possible to transmit on one whilst tuning the receive section on the other band and is usable as a full duplex repeater (for approved users, i.e. RAYNET, etc). The first sample in the country will be on demonstration on the **Lee Electronics stand at the Leicester Exhibition**. The proposed introductory price is £650.00.

The 1990-91 Tandy Catalogue

The latest Tandy 1990-91 Electronic Catalogue is now available free-of-charge. Produced annually by InterTAN UK Limited, the Walsall based electronics and computer retailer better known by its trading name Tandy. The full colour 140-page catalogue contains a complete guide through their product range and features details on all Tandy stores and dealers.

Anyone wishing to obtain a copy should visit their local store or dealer.

Cash in all Rally Season long with Practical Wireless

Cut out this coupon and bring it with you to any of the rallies that *Practical Wireless* is attending and you can save 5% on goods bought from our stand. If you collect the coupon from two separate months of *Practical Wireless* you can save 10% on goods purchased from *Practical Wireless* at the rally.

If you don't want to cut up your magazine, bring the whole issue along and we will validate the coupon without removing it from your magazine.

Offer limited to a total of two coupons per transaction

PW DISCOUNT VOUCHER NOVEMBER 1990

Newsdesk '90

Summitek Portabeam

The Summitek DL-146 portabeam 3-element delta loop antenna was developed during extensive field testing by Stephen Peterson of Summitek, Salt Lake City, Utah. He wanted an antenna with good gain, good portability and easy field assembly during adverse conditions. What resulted was a version of the proven delta loop with about 8dBd gain, equivalent to a 4-5 element Yagi-Uda parasitic array. The antenna's three elements and male BNC equipped feed line all store inside the antenna's 864mm boom. Throw the stored antenna in the car boot or stuff it in your backpack, it's virtually indestructible when stored.

While the antenna was developed for emergency field use it has proven extremely valuable for field day and other portable applications.

Each DL-146 is hand-made and tested. Quality brass, aluminium, pvc, coaxial cable and connectors are used in its construction. Should an accident befall the antenna, spare parts can be ordered (or obtained locally) or the antenna returned for repair. Each antenna comes with its own v.s.w.r. graph made prior to



shipping and dimensions for replacement parts. Complete assembly instructions are included. The antenna weighs about 19 ounces, a little over one pound.

The Portabeam DL-146 comes with a 100mm pvc handle for hand use. A porta-mast is available for field use, however, the threaded mounting 'T' enables you to easily design accessory masts and mounting brackets to suit your specific requirements using readily available pvc pipe and connectors.

The DL-146 can be used

with either vertical or horizontal polarisation. While we do not recommend that you use the antenna for permanent outside use, it will make a fine indoor or attic mounted beam.

In addition to the complete system, a kit version containing a drilled boom and sized fittings may be made available if there is sufficient interest.

Further details from:

**Steve Peterson
Summitek
PO Box 520011
Salt Lake City, UT 84152
24 hour answering/
ordering 801-277 4205**

Coping with Cancer

An additional stand and a variation to the norm, this year is to promote the 'Coping with Cancer' group in Leicester in honour of the late G4CPY Neville, who had always taken charge of the 'talk-in' station at the Granby Halls. The 'Coping with Cancer' group exists to help people cope with the practical and emotional problems following a diagnosis of cancer, this service is for the sufferer and their families.

The group uses their own personal experiences of cancer, giving caring support - sharing can lessen the fear which is often more of a problem than the illness itself.

The group aims to provide a service which will improve the overall care of cancer patients in the community, especially those who are unaware of the many organisations and benefits available to them, medical advice is not given, but close co-operation with the professionals is achieved, accepting referrals and passing on information.

Help is at hand at all times, both for the sufferer and their family, by contacting Leicester 621112 or calling at **Spencer Chambers, 4 Market Place, Leicester LE1 5GF.**

Most of the items being offered for sale on the 'Coping with Cancer' stand will be soft goods made by the members of the group. Items include soft toys, cushion covers, dried flower arrangements, patch-work quilts, etc.

New Unitel Catalogue

Unitel has produced a comprehensive brochure on its range of fuses and fuseholders from several established manufacturers.

The range of fuses from Beswick, Littlefuse and Siba cover T, F and FF types, glass and ceramic, in both 20mm x 5mm and 1 1/4 x 1/4 in dimensions. Details are also provided on axial lead fuses from Littlefuse.

The fully illustrated brochure highlights an extensive selection of fuses and fuseholders from Bulgin, Littlefuse and Schurter in varying styles. Information is also provided on fuseclips and fuseblocks.

Copies of the brochure are available free-of-charge.

For further details, contact:

**Alan Coulling
Unitel
Tel: (0438) 312393**

Multi-Mode



**PRICE INCLUDES FREE IBM-PC, CBM-64
DATA AND FAX SOFTWARE ON DISK**

PK-232 MBX Multi-Mode Terminal Unit

With over 40,000 units shipped, the PK-232 is the world's leading multi-mode data controller. The PK-232 MBX combines Morse Code, Baudot, ASCII, AMTOR/SITOR, HF and VHF packet, WEFAX transceive and NAVTEX receive in one comprehensive unit.

• Exclusive SIAM™ Signal Identification and Acquisition mode

- 20 front panel status indicators
- TDM Time Division Multiplex
- PakMail™ mailbox with 3rd party traffic
- FAX printing - supports most printers
- Two radio ports
- Host Mode program control
- KISS mode for TCP/IP
- 32K Lithium backed RAM

**PK-232 MBX: £299.95 Inc. VAT
(£5.00 post and packing)**



ICS Electronics Ltd. Unit V, Rudford Industrial Estate, Ford, Arundel, West Sussex BN18 0BD

Telephone: 0903 731101 Facsimile: 0903 731105



STANDARD NEW!

C5608D Dual Bander



The proposed introductory price will be

£650

FEATURES

- ★ Handmic with bright LCD frequency readout.
- ★ All functions on keypad microphone.
- ★ DTMF (when optional CDT5608 fitted) programmable two tone only is possible.
- ★ CTCSS (when optional CTN5608 fitted) keyboard programmable
- ★ Memory scan
- ★ 1 MHz band scan
- ★ Single band operation
- ★ Key lock
- ★ Dual displays
- ★ Separate volume and squelch controls on both bands
- ★ Cross band repeater for authorised users (ie Raynet)
- ★ Keyboard expandable frequency ranges
- ★ Cellphone receive capability
- ★ Possible to receive AM
- ★ Extension mic lead. Lets you remote the set. 2 mtr or 4 mtr length
- ★ Twin mic lead, to run hand and boom mic together

Hi! Standard have produced this wonderful new dual band, 144/432 MHz, 50-Watt hi tech design, and it takes me two days to suss out where the on/off switch is! I have to be honest, I now have the handbook, and it's almost English too, so I might attempt to take it off the repeater channel!!

No, seriously, it is one of the most sophisticated pieces of equipment I have played with for some time, it has everything that the now renowned C528 has plus a few extras. I have managed to get some info (not issued by the manufacturer) which, from the keypad will give you receive between 800 MHz and 1000 MHz, plus, again, keypad programming, listen AM for airband! Haven't had time to try these out yet, only got sample two days ago. I don't think I have to remind you that we are the sole authorised importer for all Standard products, including their commercial and marine products, so I won't.

We will be at the Leicester Show, so come over and see us. PS. I still drink Campari and lemonade... hint, hint!

Norman

C528 Dual Band Hand Held



Standard have done it again! You all know how popular the C500 is, well now here is their latest dual bander — the C528 (not to be confused with the Japanese only version, the C520).

The European version has all the facilities that you want in a base station, let alone a hand held!

FEATURES

- ★ Direct 13.8V in for 5 Watts out.
- ★ VHF 2.5W, UHF 2W with CNB151 NiCad pack.
- ★ Dual displays.
- ★ Power save function.
- ★ Multiple memories.
- ★ Priority channel.
- ★ Tone squelch (option).
- ★ Programmable offsets.
- ★ Coded paging function.
- ★ Various scanning modes.
- ★ Programmable step sizes.
- ★ 144-146 VHF, 430-440 UHF, 800-975 Rx only.
- ★ Separate Vol. & Squ. controls for each band.
- ★ Hand held
- ★ 2m & 70cm
- ★ 5 Watts output
- ★ Repeater function

£379

**TRADE ENQUIRIES WELCOMED
PLEASE PHONE 01-450 9755
★ STRICTLY TRADE PLEASE ★**

**400 EDGWARE ROAD, LONDON W2
071-723 5521 Tlx 298765**

OPENING TIMES: 9.30am-5.30pm Mon-Fri. 10am-4.30pm Sat.



Normally 24hr despatch but please allow 7 days for delivery



**NORMAN
G4THJ**

Leicester Show

★ NEW ★ NEW ★ NEW ★

STAND 353



★ NEW ★ NEW ★ NEW ★

Radio Personality - G4YXV

Feature

One look at Geoff Pagoda's antenna-festooned Land Rover on *PW*'s front cover tells you that he's a keen v.h.f. portable operations man. Another - equally brief look inside the vehicle will also leave you in no doubt that here is a man dedicated to his hobby.

Perhaps 'Radio Personality' should have been entitled 'One Man and His Wagon' for this month! Geoff, like many other amateur radio operators now coming onto the bands, had his interest aroused in radio communications when he was introduced to CB radio.

"I thought it was all a joke at first," he said, "but it soon took hold of me". Geoff, whose Polish father was killed during the latter stages of the war, was born in Germany but was brought up by his mother and British stepfather in the north-east of England. "Even after 22 years away from South Shields I've still got the Geordie accent," he says.

Geoff's job as a service engineer looking after everything from 'Juke Boxes' to gaming machines kept him on the road for 22 years travelling within a 40 mile radius of Bedford. "Twenty two years is enough of service-van driving and I applied for a bench-job which I'm now enjoying" he tells us.

Anyone who sees Geoff's ex-military 'T' registered Land Rover cannot fail to see how keen he is - but how did he become involved so deeply in portable work - especially with a Land Rover!

"It all started with the 'Worked All Britain' crowd where I made many friends and worked some interesting places and people," Geoff explained. In particular Geoff mentions that through his friend G1GSB his interest in WAB 'Square Bashing' grew.

Eventually it became obvious that the sort of site and locations he was setting out to activate for WAB - needed a rugged, especially equipped vehicle. The re-registered Land Rover turned out to be just the job.

"I didn't know anything about Land Rovers when I started but I learned. It's also very lucky that I'm only five-foot three inches tall. I can sleep in the back of the wagon then," he joked.

In fact he wasn't joking because he'd just returned from helping to run a special event station GB50BOB at the old RAF 'Battle of Britain' commemoration, at former RAF Hawkinge where he had to sleep in the vehicle for a week.



Roving Rover

Geoff's unique 'Roving Rover' has taken him to some rare and exotic locations throughout the UK. The sturdy vehicle has been seen in delightful spots in the Highlands and Islands and enabled the many keen 'square bashers' to work otherwise 'silent' areas.

For a long time, 144MHz was Geoff's main area of interest but now he's getting very keen on the 50MHz scene, and has had a great deal of pleasure working on the band.

Geoff's busy life demands much and his hobby even more. His dedication to his three hobbies of amateur radio, 'Square Bashing' for WAB and photography has provided much enjoyment and, perhaps inevitably, left him a bachelor. "No, I can't afford marriage," he says with a chuckle, "my other hobbies are too expensive!"


Specially Equipped

The Land Rover, despite being an ex-army model - still required a great deal of work to enable Geoff to use it 'off the beaten track'. "When I'd got all the equipment, antennas and the 2.5kVA Honda petrol-engined generator on board - one end of the Land Rover was much lower than the other!" said Geoff - indicating the degree of slope the vehicle attained!

However, once it had been fitted with strengthened springs the sturdy Land Rover could take his portable station literally anywhere he liked from the Scottish Highlands to Land's End. As a result Geoff has been able to activate over 200 areas for the WAB 'square bashers' during his various expeditions.

When combined with his interest in photography, Geoff's determination and enthusiasm make a formidable mobile public relations team for our under-publicised hobby. You just never know where the 'One Man and his Wagon' team will turn up next. But wherever it is, onlookers will never be in doubt that Geoff Pagoda is a keen radio amateur and an ambassador for the hobby.

Amateur radio - although a specialist hobby itself - has many facets. This month's Radio Personality - Geoff Pagoda G4YXV - has carved his own niche operating from remote areas within the UK.

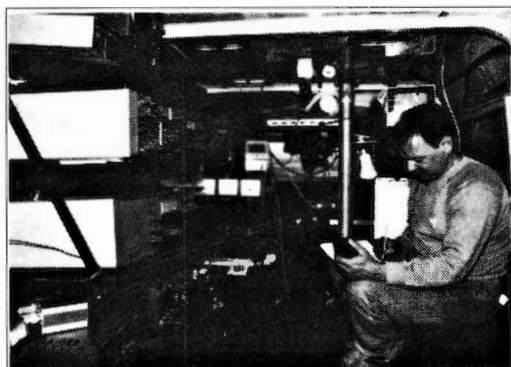

Now you can see for yourself...an Amateur Radio 'Aladdin's cave'.

2-Element Extended Collinear Antenna For The 144MHz Band

This antenna described by Fred Judd G2BCX gives a useful amount of gain over a 144MHz band vertical dipole, allowing better reception as well as transmission.

Vertical collinear antennas consisting of a number of half-wave elements, one above the other, are always operated with the currents in the elements in phase. But, because of the nature of the mutual impedance between the elements, the radiation resistance increases as the spacing between the elements is decreased. For this reason the power gain does NOT increase in direct proportion to the number of elements in the array.


Power gain is greatest when the spacing between elements is increased to between $0.3-0.5\lambda$ at the frequency of operation (the optimum is 0.41λ). However, when more than two elements are employed the use of widely spaced half-wave elements makes construction somewhat difficult and necessitates a system of feeding r.f. separately to each element.

Close spacing elements may be more convenient allowing a collinear consisting of two or more elements to be fed from a single coaxial cable. This configuration limits the overall power gain i.e. the directivity gain relative to a single dipole, to 1.9dBd for a two element, 3.2dBd for 3-element and 4.3dBd for 4-element system.

An Extended 2 Element Collinear

However, it is possible to construct a vertical collinear for v.h.f. operation consisting of two elements and obtain an omni-directional directivity gain a little greater than obtainable from a 3-element close spaced system. This is achieved by making

Fig.2: Vertical radiation pattern of the extended collinear antenna. The antenna provides omni-directional coverage in the horizontal plane (see Fig. 7).

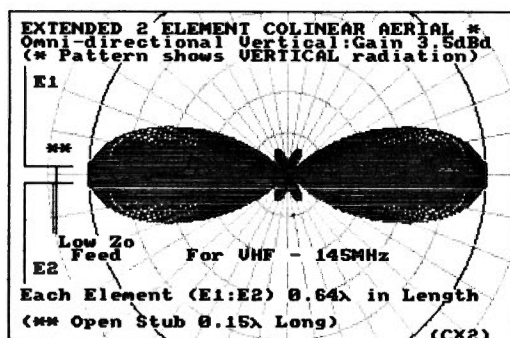

**HOW MUCH?
HOW DIFFICULT?**

**£15
Intermediate**

Shopping List

2 x 1.5m lengths of 19mm (3/4in) aluminium tube
2 x 305mm lengths of 12mm (1/2in) aluminium tubing
1 x 787mm of 21mm (7/8in) square aluminium tubing.
2 x 500mm (approx) of 21mm (7/8in) square aluminium tubing.
2 x 70mm length of 21mm (7/8in) aluminium tubing
2 x 28.5mm length of 21mm (7/8in) aluminium tubing.
1 piece 3mm (1/8in) thick aluminium plate.
One 100mm piece of turned insulating material, Delrin, Nylon 66, even wooden dowelling should be adequate. Various nuts, screws, washers, etc. as required. Watertight connecting box.

NOTE: This special watertight connection box is available from B & H Aerials, 49 Blackwell, Darlington DL3 8QT. Price £2.50 including VAT, post and packing. Order: Coaxial Connection Housing (v.h.f. Insulator) and state for extended 2-element collinear by G2BCX as in *Practical Wireless*.

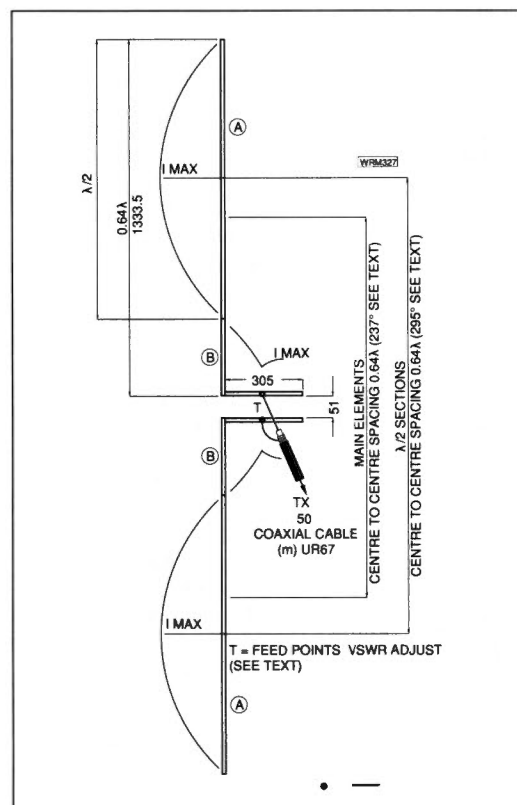


Fig.1: Configuration, general dimensions, current distribution, etc. 2-element extended collinear antenna.

each element 0.64 of a wavelength long as illustrated in Fig. 1. The currents in each half-wave portion of the two elements will be in-phase. The array is fed via a short, open ended stub, 0.15λ long using a 50Ω , preferably low loss, coaxial feeder (MUR63) direct from the transmitter.

It is the inner ends of each element (B and B as in Fig. 1) plus the gap between (where the open stub joins) that provide the wider spacing between the half-wave sections (A and A in Fig. 1). That allows the currents in each of these sections to be in-phase. Taking the velocity factor into account this configuration allows a wide, effective spacing (nearly 0.4 wavelength) between the half-wave portions of each element thus providing a directivity gain of 3.5dBd (5.65dB isotropic). The short sections at the centre (B and B) do, however, carry currents in phase, opposition to those in the half-wave sections and produce four, very small, side lobes. The radiation from these is low enough as to be of little or no consequence. The full, computer produced vertical angle radiation pattern is shown in Fig. 2.

Construction

The element lengths and the length of the short open stub section are given in Fig. 1. The major part of the construction is illustrated in Fig. 3. This includes details of essential materials concerning the

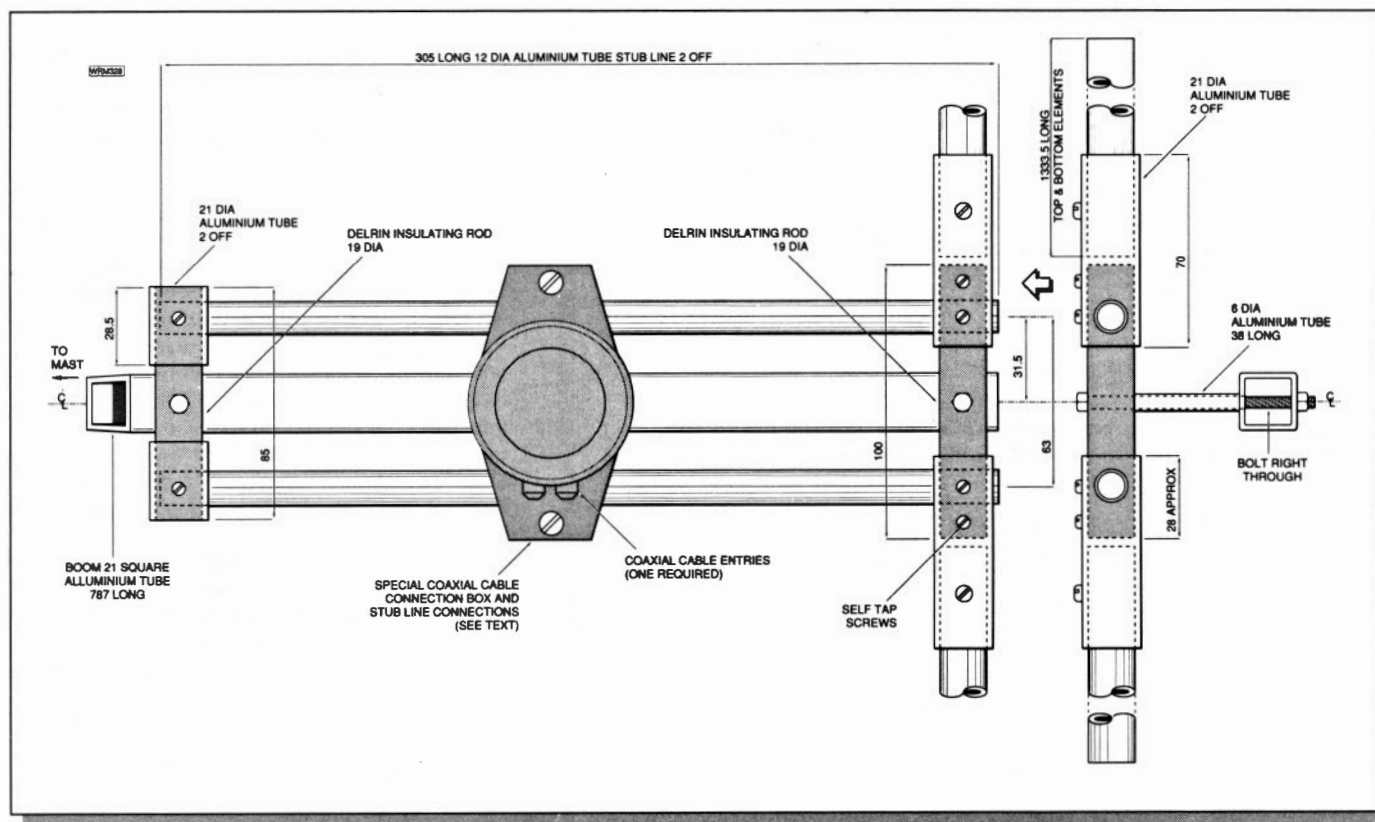


Fig.3: Constructional details, dimensions and materials for the assembly of the twin stub line with the driven elements and the position of the cable connection housing (see text regarding availability of this unit).

main elements, supports, stub lines and the coaxial cable connection box.

The main elements and the stub lines are secured to the boom with bolts right through the respective Delrin insulating sections. Spacers are fitted, as shown, to keep the stub lines and inner ends of the main elements away from the boom by about 38mm.

The cable connection housing box is fitted before the outer ends of the stub lines are secured to the insulating section at the rear (as in Fig. 3). This box actually bridges the two lines and is held to them by half-round clips supplied ready-fitted to the box itself. Each stub line slides under a clip. The coaxial cable connections to the half-round clips on the stub lines are made via two terminals inside the box.

When, as described later, final adjustment has been made for minimum v.s.w.r. each clip must be secured to its respective stub line with a short, self-taping screw. This ensures positive electrical connection and prevents any movement of the clips and the box.

Note also how the ends of each stub line, as in Fig. 3, are fitted to the main elements so that they make good contact. A hole, just large enough to admit the end of a stub line, is drilled in the element but NOT right through. The other ends of the stub lines are secured in a similar manner Fig. 3 (right). This part of the assembly is shown close-up in the photo Fig. 4.

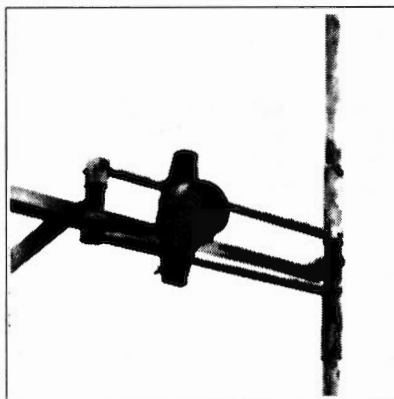


Fig.4

Changing the Method of Assembly

Whilst different methods of assembly may be devised it is important NOT to alter the lengths of either the main elements and stub line lengths, or the diameters of the aluminium tube specified for these.

Final Adjustment

When assembly is complete, the full length of coaxial cable required to reach the final location of the antenna should be connected. The antenna should be set up *horizontally* in the open as high as possible above ground, say at the top of a pair of steps, or suspended from a rope clothes line but so that the cable connections can be reached for v.s.w.r.

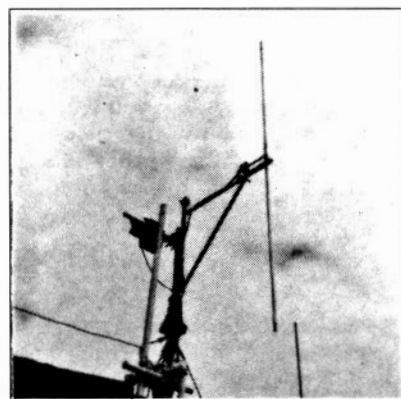


Fig.5

Fig.4: Closer view of the cable connection housing and the stub lines. Shows how these and the driven elements are mounted on the boom.

Fig.5: View of the completed prototype antenna mounted on a rotator for test purposes only, as explained in text.

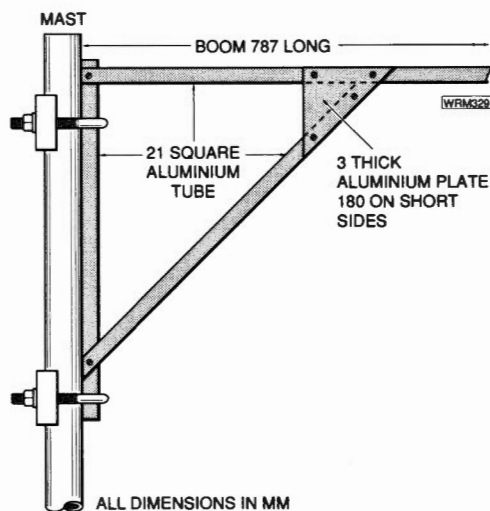


Fig.6: Suggested arrangement for supporting the boom and antenna and attachment to a metal or wood mast.

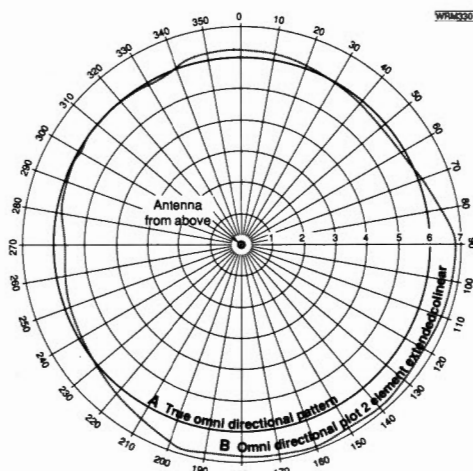


Fig.7: Plot A. Perfect circular omni-directional radiation pattern. Plot B. From the vertical extended collinear. Slight deviation due to other nearby vertical 2m antennas, proximity of metal mast and other conductors. The 3/8ths wavelength offset provided by the boom is about optimum and should not be less.

adjustment.

Set the cable connection box so the clips are about halfway along the stub and make an initial check for v.s.w.r.. It is only necessary to move the box and therefore the clips a little either way to bring the v.s.w.r. to as near to 1:1 as possible at

band centre frequency (145MHz). Next, check the v.s.w.r. at each end of the band. It should rise only, if at all, by a very small amount.

If possible a further check on v.s.w.r. should only be made with the antenna as high as possible and vertical. The complete and tested antenna is shown in the photo Fig. 5. If all is satisfactory, the cover for the cable connection box can be fixed and to make sure no water can enter, run a little Evostick around the joint between this and the box and at any other point where water could enter, especially at the coaxial cable entry.

Attachment to a Mast

The antenna may be mounted on a wood or metal mast as suggested in Fig. 6 (see also photo Fig. 5). The length of the boom is sufficient to prevent undue interaction between the antenna and mast and/or any metal guy lines supporting the mast. The coaxial cable is routed from the connecting box, along the boom and then down the mast for the same reason. With this mounting, the omni-directional (radiation in the horizontal plane) pattern displacement, derived from actual measurement made by rotating the antenna whilst receiving a steady signal, is minimal as shown in Fig. 7.

The prototype collinear is at present mounted on the same mast and at the same height, as a 12-element (2m) ZL Special. There is virtually no interaction between the two particularly when the beam is horizontal. Note that the collinear mounting boom provides a clearance, from the mast, of about 3/8 of a wavelength.

Performance

At a height of about 12m above ground (the author's QTH is about 4m a.s.l.) the extended collinear provides a very good local performance, that is over the whole of Norfolk and a long way South into Suffolk under what might be called normal conditions. During tropo lift good signal reports have been obtained from numerous European countries, France, Holland, Germany, etc., and from more distance locations around the UK.

Finally, it should be mentioned that the author makes no claim for original design except for dimensions, construction and the matching method for 2m operation of an antenna that was originally known as the Double Extended Zepp and used in the early days of amateur radio, in horizontal mode, for the h.f. bands. Few probably know that the so called 5/8 wavelength vertical used with a ground plane, or car roof mounted for 2m mobile operation, was derived from this antenna.

PW

For the latest news of special event stations, rallies, what's on the bands - ring

Wireless-Line on 0898 654632

Calls charged at 33p off-peak, 44p all other times.

If you have news for inclusion on Wireless-Line ring (0202) 678558 in the evenings and leave a message on the answering machine.

RAYCOM BRINGS YOU THE LATEST TECHNOLOGY - FIRST!

SALES HOTLINE 021 552 0073 and HELPLINE 021 552 0051 (Office Hours)
FULL RANGE OF ICOM, YAESU, BEARCAT, NAVICO, MFJ AND MANY MORE

The **TOKYO HX240** HF Transverter when coupled to an all-mode 2m rig will give you 50 watts on 80 to 10m. RAYCOM have put together this unique unit with the new YAESU FT290R II inc. DC and COAX leads!!!



**SPECIAL
THIS MONTH
ONLY!!!
HX 240 - £229**

FT290R II	£429.00
TOKYO HX240	£249.00
1/2 Size G5RV	£ 14.95
12 Amp PSU	£ 59.95
Nicads & Wall Charger	£ 31.30
Total regular price	£784.20

RAYCOM PACKAGE DEAL £699.00

YOU SAVE £85.20!!

THE UK SCANNER EXPERTS

LATEST NEWS FROM ICOM! WE HAVE THE SCANNER!!!

Demand for the new IC-R1 handheld and the IC-R100 base/mobile scanning receiver is extremely high, with the result that supplies have been sporadic. We are the only dealer in the UK to have consistent supplies of the IC-R1/R100. **RAYCOM's buying power wins!**

IC-R1 500KHz to 1300 MHz	£399.00
IC-R100 500KHz to 1800MHz	£499.00

Ring our hotline now to order your R1 or R100!

Buy it now! e.g. R1 £40 deposit, payments £15/month (APR 36%)

OTHER HIGH QUALITY SCANNERS FROM RAYCOM

BEARCAT UBC 50/55XL 66-88/136-174/406-512MHz	£99.95
10 memories, channel review, including FREE charger worth £4.95	
BEARCAT BC 70XLT 66-88/136-174/406-512MHz	£149.99
20 memories, full frequency display, with FREE car charger kit worth £4.50	
BEARCAT UBC 100XLT 66-88/118-174/406-512MHz	£199.99
100 memories, airband, search, including FREE car charger kit worth £4.50	
BEARCAT UBC 200XLT 66-88/118-174/406-512/806-956MHz	£229.99
200 memories, top of the range, including FREE car charger kit worth £4.50	
BEARCAT UBC760XLT 66-88/108-174/350-512/806-956MHz MOBILE	£229.99
100 memories, 5 search bands, including FREE mains adapter worth £4.95	
JUPITER MVT 5000 Hand-held	only £249.00
25 to 550MHz and 800 to 1300MHz, 100 Memories	
NEW JUPITER MVT 6000 mobile	SPECIAL OFFER £319.00
25 to 550 MHz and 800 to 1300MHz, 100 Memories	

MANY OTHER TYPES & MODELS STOCKED - SAE FOR DETAILS & USED LIST

HP100E/AR1000

FAIRMATE HP100E

Since it's launch a few months ago, this has become the UK's most popular scanning receiver. The HP100E covers 25 to 550MHz and 830 to 1300MHz with selectable channel steps of 5, 10, 12½ or 25KHz. You can also program channel steps in any multiple of 5 or 12½ KHz up to 100KHz. With 1000 memory channels arranged in 10 banks of 100 the scanning functions are really versatile.

Three modes are available - AM, WFM and NFM. this means that you can also listen to your local FM radio station as well as Heathrow approach or your local VHF repeater.

If that's not enough, **Raycom** have an exclusive British made shortwave converter. The converter and a small mod are all that's needed to add 200KHz to 30MHz coverage to your HP100E (or your AR1000!)

HP100E/AR1000	£249.00
SW Converter	£59.00
Modifications	£15.00
Total regular price	£323.00

SAVE MONEY - SAVE £24!!
RAYCOM PACKAGE DEAL £299.00

AOR AR-3000



There are many scanning receivers to choose from today but several features make the AR3000 stand out from the others. Frequency coverage is from

100KHz to 2036MHz - **NO GAPS!** It is truly multi-mode, covering WFM, NFM, AM, USB, LSB and CW. Frequency steps are programmable in 50Hz steps from 50Hz to 100KHz (so you do get 9KHz steps on MW). It has 400 memory channels in four banks of 100 so can store all your favourite frequencies and can search through these at 20 channels per second. It can also perform a limited scan in each of the four banks and an accessory socket can control a tape recorder remotely, and a built in clock/timer helps. For computer buffs, full control over all functions is available via a built in RS232C interface. Details of operating protocols are in the manual and best of all, **it's in stock now!!!**
AOR AR3000 **£740.00**

CHARGE IT!

Why not take advantage of the **RAYCOM Credit Card** and spread the payment for that scanner you've always wanted. Example: Yaesu FRG9600 MKV package £70 deposit and £28 per month (APR 36%). Call for a quote and written details! Licensed credit broker.

YAESU FRG9600



9600 standard 60-905MHz	£469.00
9600 MkII 60-950MHz	£499.00
9600 MkII pack 60-950MHz ..	£545.00
9600 MkV 0.2-950MHz	£625.00
9600 MkV pack 0.2-950MHz ..	£699.00
Standard to MkII upgrade	£ 40.00
Standard to MkV upgrade	£149.00
MkII to MkV upgrade	£129.00

All packs include PSU and ROYAL 1300 diaseal

RAYCOM COMMUNICATIONS SYSTEMS LIMITED, INTERNATIONAL HOUSE, 963 WOLVERHAMPTON RD, OLDBURY, WEST MIDLANDS B69 4RJ. TEL 021-544-6767, Fax 021-544-7124, Telex 336483 IDENTI G.

RAYCOM
COMMUNICATIONS SYSTEMS LIMITED

Telephone **021-544-6767**



RAYCOM gives you more BUYING POWER

ALL MAJOR CREDIT CARDS ACCEPTED. BC, ACCESS, DINERS. INSTANT CREDIT UP TO £1000 (SUBJECT TO STATUS) WITH RAYCOM CREDIT CARD (APR 36%). INTEREST FREE CREDIT ON CERTAIN ITEMS AT MRP. CALL FOR MORE DETAILS.

ORDERING INFORMATION

WE STOCK ICOM, YAESU, BEARCAT, MFJ, BUTTERNUT, CUSHCRAFT, AEA, NAVICO, STANDARD, TEN-TEC AND WELZ AMONG MANY OTHERS. SEND SAE FOR FULL LIST.

TEL: 021-552-0073

PHONE BEFORE 4PM FOR NEXT DAY DELIVERY BY COURIER (£15.00) - OR 2PM FOR DELIVERY BY POST (£10.00). PLEASE ALLOW TIME FOR CHEQUES TO CLEAR. MANY OTHER ITEMS IN STOCK. PLEASE CALL FOR MORE INFO AND FOR EXTRA SPECIAL DEALS!

INFOLINE 0836-771500 5-9pm (weekdays)

OPENING HOURS 9-5.30 MON TO SAT,
73 DE RAY G4KZH, TOM G6PZZ
COLIN and JOHN on the landline.

SPECIALISTS IN DRESSLER ACTIVE RECEIVE ANTENNAS

NEW ARA 1500
50-1500MHz

Now UPGRADED Sept 90

'N' Type Connection



Gain 11.5dB

Noise 3.0dB

Intercept point
3rd Ord
+ 21dbm

£159.00

Now with fully
tunable
interface.

Now UPGRADED Sept 90

ARA 30 ACTIVE ANTENNA
50kHz...40MHz WITH LIMITED
PERFORMANCE UP TO 100MHz



Professional electronic circuitry
with very wide dynamic range.
Meets professional demands
both in electronics and mechanical
ruggedness. 1.2m long glass
fibre rod. Circuit is built into
waterproof 2.5mm thick
aluminium tube. Ideal for
commercial and swi-receiving
systems. £139. See Review in
August 1985 issue p.35

£139
Both antennas come complete with 7 metres of
cable, interface, power supply and brackets.
Dressler preamps available.

Also a wide range of masthead pre-amps available
for most V.H.F. and U.H.F. frequencies,
including scanner pre-amps from £89.

Dressler
COMMUNICATIONS LTD.

191 FRANCIS ROAD
LEYTON • E10 6NQ • LONDON

TELEX 8953609 LEXTON G

PHONE 081-558 0854 081-556 1415

FAX 081-558 1298

24hr Hotline anasphone No: 081-558 0854

OPEN MON - FRI 9AM - 5.30PM

OPEN SAT - 9.30AM - 4.30PM

INTEREST FREE HP FACILITIES AVAILABLE
PROMPT MAIL ORDER



Prices correct at time of going to press. Please phone for latest
quote.

Or contact your local agent anytime on the following numbers:
Shurt (Bromley, Kent) 0860 634526. Terry (Biggleswade, Beds.)
0767 316431.

SPECIAL OFFERS

IC-R9000



INCLUDING
ARA 30 +
ARA 1500(N)
£3,995

IC-R7000



INCLUDING
ARA 1500(N)
£999

IC-R71




INCLUDING
ARA 30
£855

KENWOOD R5000



INCLUDING
ARA 30
£899

KENWOOD




NEW
TS950
H.F. TRANSCEIVER
EP.O.A.

TS940 INC. ATU & MIC
H.F. 5 BAND

Kenwood R5000 + ARA 30 £999
Kenwood R5000 £799
VC20 Converter £160
TS890 HF + 6 Mtr Inc. Microphone £895
TS440 Inc Auto ATU Inc. Microphone £1,150
TS940 Inc Auto ATU £2,000
TS790 270 + SAT P.O.A.
TM241 2mtr FM NEW T.B.A.
TR77 Dual Band Handie T.B.A.
TR751E 2mtr Multimode £575

ICOM



IC781
H.F. TRANSCEIVER
EP.O.A.

All ICOM stocked including accessories


IC 2SE IC 229EH IC 970EH
IC 2SE IC 3220EH COMPLETE
IC 4SE/SET IC 2400 VHF/UHF
IC 24ET IC 2500 BASE STATION
NEW MODEL IC 765
ALPHA 6 IC 735
50 MHz 23cms Base)
6 CHANNEL IC 272
HANDIE IC 21
IC 100 + SSB IC 751A

SCANNERS

AOR 3000 FM/AM/SSB £995
AOR 1000 Mk II £249
AOR 2515 5MHz-1500MHz £575




STANDARD
AX700
PANADAPTOR Deluxe
£575.00



FRG 9600
50 - 950 MHz
£900.00

YAESU



FRG
8800
HF RECEIVER
£585.00

VHF CONVERTER £100
FRG900M 60-950MHz £500

LARGEST LONDON YAESU STOCKIST
FT747GX COMPLETE WITH FILTERS £549
UK SUPPLIED

FT736R £1195
FT4700R £499
FT470R (inc. Nicad & Charger) £385

STANDARD

WE ARE [STANDARD] AUTHORISED DEALER

C500 DUAL BAND £335
C150 2 MTR £230
CS28 DUAL BAND £379
AX700 SPECTRUM RECEIVER £575


SONY

SONY ICF 2001D
76-108MHz
116-135 AIRBAND
153kHz-23.995MHz
FM - AM - SSB 32 MEMORIES
INC PSU, CARRY STRAP
& EARPHONE



Sony ICF 7600DS FM/AM/SSB £159
Sony SW1 150-30M C/S + FM Stereo £249
Sony Pro 80-150kHz-108MHz, 115MHz-224MHz
AM-FM-SSB £299
Sony Air 7 £229
Sony AN1 Active Antenna £35
Sony Accessories Available

NEW
SONY ICF SW7600
76-108MHz
153kHz-23.995MHz
Complete with case,
mains power supply,
earphone and
frequency list.



SPECIAL OFFERS ON YAESU

SPECIAL OFFERS ON ICOM

LARGEST ICOM YAESU DEALER IN LONDON



Dewsbury Supa-Tuta

Learning Morse code is never easy and tutors such as the Supa-Tuta from Dewsbury Electronics are a great help to many of us. Another interesting point about the Supa-Tuta is that it is entirely British made. A first look reveals an impressive array of useful features that should prove very useful to the learner. So let's take a closer look at the Supa-Tuta.

Presentation

I was most impressed with the appearance of the Supa-Tuta. Instead of the usual plain metal or plastics box, it employed a metal and plastics front panel with wooden side cheeks. Although this may sound like a fairly minor enhancement, it certainly looked attractive.

In addition to the tutor itself, there was a fourteen-page A4 manual that was bound by a simple and durable plastics strip.

The manual contained a good range of useful information about the workings of Morse code that should prove interesting for the beginner. As the Supa-Tuta used pre-programmed letter patterns, a large part of the manual was taken up with listings of these. This is, of course, very useful for checking the accuracy of your decoding and is a distinct advantage over simple random number tutors.

For the newcomer, there was a very useful step by step guide to getting started on the beginners courses. This single page was particularly valuable because of the unusual operating procedure of the Supa-Tuta.

Getting Started

Powering-up the Supa-Tuta required an external power source capable of delivering 9V - 14V d.c. at 250mA. For receive practice there were no other connections required as the Supa-Tuta had an internal speaker. However, there were several options available via sockets on the rear panel. Although the internal speaker was very convenient, family relationships are usually improved somewhat if headphones are used! This was facilitated via a standard 6.3mm jack socket on the rear panel. The output characteristics of this were designed for standard low impedance headphones.

The internal side tone oscillator could be used for sending practice by plugging a standard key into a 6.3mm jack socket on the rear panel.

For those who may want to use the Supa-Tuta in a classroom situation, it can be fitted with a relay output. This can then be used to key a more powerful oscillator. All in all the Supa-Tuta had a comprehensive range of facilities.

Operation

When it comes to operating the Supa-Tuta the first thing you notice is that all functions are controlled by a sixteen button alpha-numeric keypad. This was rather unconventional, but very practical. All the various facilities were selected by pressing the appropriate alphabetic key followed by a number then the space key.

One of the most important adjustments for the beginner is the speed. The Supa-Tuta had a range of 2 to 99 words per minute that should suit everyone from the raw beginner to the expert.

On the audio side both the pitch and volume could be altered, via the keypad. The range of pitch adjustment was 500 to 1250Hz and covered the 'standard' frequencies of 800Hz and 1kHz.

The volume control range was split into eight steps from off to full volume and proved to be adequate.

One useful trick for the learner is to practice with a fast character speed but with the inter-character pause expanded. This technique gives the learner some extra thinking time whilst still preserving the correct 'sound' of the character. The Supa-Tuta handles this with a programmable inter-character pause of up to 50 dots. As the normal spacing is 3 dots, you can see that this gives a very wide range of control.

The character generation system employed both stored and random message generation. The stored message technique requires a large range of patterns to avoid the problems that could occur if the operator starts to learn the sequences. The Supa-Tuta overcame this problem with a vast range of learning patterns.

The starting point was the beginner's course which was divided into ten lessons. The first lesson

REVIEW

We all need help when attempting to learn Morse code, so a new tutor is always welcome. Mike Richards G4WNC looks at the Supa-Tuta from Dewsbury Electronics.

REVIEW

simply repeated a single six letter group and made a good starting point. Each subsequent lesson added another group of characters with the latter lessons incorporating punctuation and accented characters. The concept of gradually building up to a complicated message is a well proven learning technique.

Once the beginner's course has been mastered you could move onto a set of ten training courses designed to further develop your decoding ability.

These courses operated in sequences containing twenty groups of characters. The first two lessons contained letters only and started with five letter groups building up to fifteen letter groups.

This was followed by some number groups of five and ten numbers per group.

The next lesson introduced accented characters in a similar format.

Mixed numbers and letters were included in the next three lessons that built up from five character groups to twenty character groups.

The final lesson in the main training course comprised random groups of mixed numbers and letters with a random group length. This was probably the most difficult test as there was no room for guess work!

Just in case this was not enough there were an additional ten messages that could be used. These were mixed letters and numbers arranged in five character groups containing 500 characters each

The final lesson had a very practical bent as it contained real words and abbreviations. Once the lesson was started it selected words randomly from the library of 69 words and 51 abbreviations. Although it was obviously impossible to list the actual sequences, the library of words was printed in the manual to aid checking.


Acid Test

Although I enjoy Morse operation I don't very often get the chance to operate, so my Morse is a little rusty. This, of course, put me in a good position to evaluate the Supa-Tuta.

I quickly became accustomed to the operating technique and found it to be quite fast. The volume and pitch adjustment ranges were very useful and well chosen.

I am a firm believer that the best way to learn Morse is to start with a fairly high speed but with the letter spacing increased. The reason for this is that the correct rhythm of the Morse is maintained despite the slow overall sending speed. The adjustment range of the Supa-Tuta was wide enough to suit just about every taste.

I started with the beginner's course and had slight doubts about the effectiveness of repeated groups. These proved to be totally unfounded - the

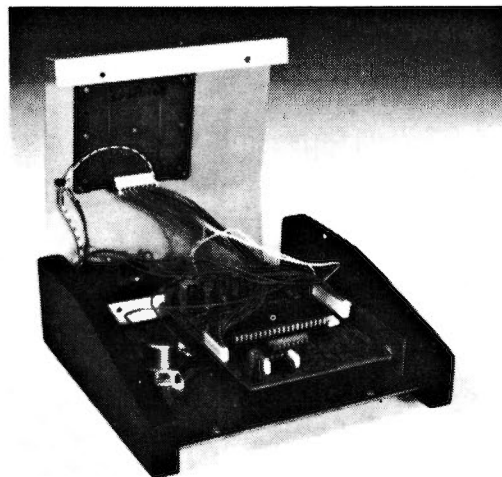

repeated groups actually gave me some confidence that I was making progress! My Morse capabilities like many are not too bad on plain text, but when I reached the accented letters and punctuation I was struggling. Despite the difficulties I encountered, I thought the course was very comprehensive.

The ten training courses and subsequent messages and words made a logical learning progression. The use of stored character patterns was a real boon and I found it very useful for spotting common errors.

Summary . .

The Supa-Tuta certainly proved to be a very effective learning aid. The provision of external keying opens up the possibility of using it for group tuition. I can imagine that it could be used by a perhaps a radio club or college tutor to provide a well structured learning programme.

The ability to check your decoded Morse was a particularly useful extra that was great for catching those tricky common mistakes.

The only criticism I have is the use of an external power source - internal battery power would have been an additional plus.

As you have no doubt gathered, I was impressed with the Supa-Tuta. The combination of good looks, fine performance and British construction must make this a winner.

The Supa-Tuta costs £69.95 and can be obtained from Dewsbury Electronics, 176 Lower High Street, Stourbridge, West Midlands DY8 1TG.

My thanks to Dewsbury for the loan of the review model. **PW**

Please indicate the type of subscription required:

PRACTICAL WIRELESS 1 YEAR

- ☐ £19.00(UK)
- ☐ £21.00 (Europe)
- ☐ £22.00(Rest of World)

SHORT WAVE MAGAZINE 1 YEAR

- ☐ £19.00 (UK)
- ☐ £21.00 (Europe)
- ☐ £22.00 (Rest of World)

SPECIAL JOINT SUBSCRIPTION 1 YEAR ONLY

- ☐ £32.00 (UK)
- ☐ £35.00 (Europe)
- ☐ £37.00 (Rest of World)

Prices current at October 1990

Subscription to commence with issue dated...

If you do not want to deface your PW, a photocopy of this coupon will be acceptable.

To: PW Publishing Ltd., FREEPOST, Subscriptions Dept., Eneco House, The Quay, Poole, Dorset BH15 1PP

Name.....

Address.....

☐ I enclose cheque/PO (Payable to PW Publishing Ltd) £.....

☐ Charge to my Access/Visa Card the amount of £.....

Card No.

Valid from to

Signature.....

Credit Card Orders can be taken on (0202) 665524.

DEWSBURY



ELECTRONICS



***PRESENTS THE
SUPA RANGE OF PRODUCTS***

SUPA-TUTA



TO TEACH YOU MORSE — QUICKLY

£69-95

STOP PRESS . . .
Now available — SUPA-TUTA PLUS
(includes keyer) **£82.50**


SUPA-KEYA



THE MOST USER FRIENDLY
KEYER AROUND

£97-50

SUPA-TUNA



MAKES SELECTING
FREQUENCIES EASIER

£65-95

**SEND S.A.E.
FOR DETAILS
OR
ORDER NOW
BY PHONE.
ALL PRICES
INCLUDE VAT.**

FULL RANGE OF KENWOOD PRODUCTS STOCKED

We are also stockists of DAIWA — POCOM — JRC — TAR — WAVECOM — VIBROPLEX —
MICROWAVE MODULES — B.N.O.S.

Dewsbury Electronics, 176 Lower High Street, Stourbridge, West Midlands DY8 1TG

Telephone: Stourbridge (0384) 390063/371228

Fax: (0384) 371228

Instant finance available subject to status. Written details on request.



NEVADA

THE UK's SCANNER SPECIALISTS

FAIRMATE HP100E MKII

1,000 ch. memory. 8-600 MHz, 830-1300 MHz

Latest UK Version.....£249

FAIRMATE HP 100E WB1

Limited Edition Wideband Version

Covering 1.600 MHz, 830-1300 MHz,

includes 3 Antennas and Charging Unit.....£289

PSU 101

Universal Base Holder and Charger,
powers most makes of H/Held scanner whilst
allowing convenient Desktop use.....£26.50

JIM LOW NOISE PRE-AMPLIFIERS

Suitable for both base and handheld scanners

• 25 - 2100 MHz

• Low Noise GaAs Fet

• Selectable Filters

• Variable Gain Control

• M100 Transmit Version

Model M75 for Receivers/Scanners..£69.95

Model M100 For Transceivers.....£79.95

Model M50 Low Cost Fixed Gain.....£49.95



Send £2 for our Latest Bumper Catalogues
We Supply Dealers Throughout The UK and Europe
Call for Details of Your Nearest Stockist

SCANNERS AND RECEIVERS

ICOM

IC-R1.....	£399
IC-R100.....	£499
IC-R7000.....	£925
IC-R71E.....	£855
AOR.....	
AR 3000.....	£765
AR 2002.....	£487
AR 950.....	£249

BEARCAT

UBC 50XL.....	£99.95
BC 55XL.....	£99.95
UBC 100XL.....	£179.00
UBC 100XLT.....	£199.00
UBC 200XLT.....	£229.00
UBC 145XLT Mobile.....	£115.00
UBC 175XLT Mobile.....	£169.99
UBC 750XLT Mobile.....	£235.00
UBC 800XLT Base.....	£149.00

YUPITERU - (JUPITER)

MVT 5000 Hand Held.....	£275
MVT 6000 Base.....	£299

MISC

Black Jaguar MKIII.....	£199
Standard AX700.....	£575
Lowe HF 225 Comm. RX.....	£429
ASA Airband Radio.....	£59.95

SONY

ICF 2001 D.....	£275
ICF 7600 D.....	£99
Air 7.....	£229
Pro 80.....	£299
ANI Active Ant.....	£49

KENWOOD

R 2000 Comm. RX.....	£595
R 5000 Comm. RX.....	£875

BUILD YOUR OWN 1 KW ALL BAND ATU

The Tm1000 1kW 1-30 MHz.

ATU Allows Effortless Matching
of Long Wire, Vertical, G5 RV,
and Coax Fed Antennas.

Tm 1000 Kit Complete.....	£138
Tm 1000 Ready Built.....	£168
Tm 1000 W/2kW Balun.....	£199

(add £5 carriage for all models)



HIGH POWER COMPONENTS VARIABLE CAPACITORS

150 pf (9.8kV).....	£19.95
170 pf (9.8kV).....	£19.95
250 pf (7.8kV) (250pf + 250pf).....	£19.95
250 pf (wide spaced 14kV).....	£26.95
500 pf (7.8kV).....	£28.00
750 pf (7.8kV).....	£29.95
Roller Coaster 1kW 30 µH.....	£28.00
Turns Counter (48 turns).....	£15.95

SEE US AT
LEICESTER
STAND
41B

USE YOUR CREDIT CARD FOR IMMEDIATE DESPATCH

HOTLINE (0705) 662145

OR FAX US FROM ANYWHERE IN THE WORLD ON:

(0705) 690626

NEVADA COMMUNICATIONS

189 London Road, North End, Portsmouth PO2 9AE

KANTRONICS V3.0
and PK232 eproms
now available

PACKET RADIO FROM SPACE!

Siskin Electronics have a policy of supplying the best range of packet radio equipment available for both terrestrial and space enthusiasts. What you see below is a very small selection of what must be the widest selection of packet radio products in Europe. The advent of the new Microsats has introduced a new range of possibilities previously considered impossible, our equipment will help you reach those goals.

The Siskin Tiny 2 Packet Radio TNC

Derived from the popular TNC-2 standard the TINY 2 is an ideal base building block for a comprehensive digital satellite ground station. A standard modem disconnect header allows connection to a wide variety of external modems such as the G3RUH FO-12/9600 boards and our own external modems. The "KISS" protocol required for successful ground station operation is also included together with a comprehensive battery backed Personal Message System for terrestrial applications. The Tiny 2 is supplied with all connectors and software for most popular home computers.

1200 baud version £129, 9600 baud version £219

The PacComm PSK-1 Microsat Modem

The PSK-1 modem simply connects to the internal modem disconnect header of most popular TNCs and offers the following features:

OSCAR 13 telemetry 400 baud reception
Access to packet radio BBs of OSCAR 16 (PACSAT), OSCAR 19 (USAT) and FUJI-OSCAR 20
In addition reception of OSCAR 18 (WEBERSAT) is catered for but please note special software (available from AMSAT UK) is required for image processing.

The PSK-1 may easily be switched out of circuit for normal terrestrial packet communications. The modem may be controlled by front panel push buttons or via a computer terminal with simple terminal software using menu driven commands. A built in RS-232 (also configurable to TLL) provides output of OSCAR 13 telemetry, display/control of the modem functions and support for external tracking devices such as the Kansas City Tracker etc. The PSK-1 also controls the up/down microphone control compensating for doppler shift etc.

£189 including telemetry cable

NB-96 9600 Packet Radio System

The NB-96 series of products provides for communications with UoSAT OSCAR 14 and terrestrial 9600 packet systems. This product is a licensed version of the G3RUH 9600 packet radio modem and is fully compatible with existing G3RUH systems. The NB-96 daughter board - simply connects to the modem disconnect header of most popular TNCs. In many cases the NB-96 may be mounted directly inside the TNC cabinet (ie most PacComm/AEA models).

Built and tested with full instructions - £95

We also stock a wide range of associated equipment such as tracking systems, rotator hardware and conventional packet radio equipment, why not call in for a demo?

Siskin Electronics Ltd.

PC House, 2 South Street,
Hythe, Southampton, SO4 6EB



Tel: 0703 207155/207587

Fax: 0703 847754

SEE US AT
LEICESTER ARS

ARC-44 Airborne T/Rx compact unit intended for use in Helicopters covers freq range 24 to 51.9 Mc/s in 280 100Kc channels mode F.M. nom O/P 8 watts into 50 ohm comprises T/R, Dynamotor, C/Box, mike amp, DC I/P 28v at 5 amps uses min & sub min valves, supplied with set circs. etc. £37 also available with 8ft fibre glass whip & base plus Ae matching unit. £53. (Manuals available see list). **AIRCRAFT RADIO** STC type STR.37.E compact VHF T/Rx 116 to 135.95 Mc/s in 50 Kc steps for use on 24v DC all transis size 6x4x10" all controls on front panel with connec info. £65. **TRANS H.T.** PriA 240v sec 1720v at 550 Ma for F.W. bridge rect. £55. H.F. **COILS** Roller coaster type 20 UH 36 trs on 2" dia ceramic former silver plated carbon brush ext size 6 1/2" x 3" x 3" new boxed. £28. **POWER UNIT** general purpose bench HT/LT p.u. for use on 240v provides var DC o/p 0 to 500v at 100 MA to 350v also LT 6.3v at 3 amps c.t. fitted V/Ma meter, screw term connec in case size 13" x 8" x 13" tested with circ. £42. **PHOTO FLASH CAPS** Rapid discharge type 215 Uf at 2.5Kv DC Pk rating size 8x4x10". £19. **VALVE V.M.** Marconi general purpose VTM type TF.1041B for 240v ranges DC volts 300 Mill/V to 1Kv AC 300 Mill/V to 300v ohms 50 to 500 Megs, I/P res 100 Meg DC AC as RF probe to 500 Mc/s plus tested with book. £38. **MONITOR CRT.** part of Army D.11 equip checks for SSB Tx modulation tunes 2/22 Mc/s in 5 bands, as 2 1/2" CRT with T.B. & Y Amp also as two AF osc at 1015 & 1605c/s for tone checks on SSB Tx req ext power with circ etc. £34.50 suitable mains trans for conv. £7.50. **AIRCRAFT ADF LOOP** book type suppressed loop for use with Marconi AD7092 Rx for use in freq range 150Kc to 2 Mc/s as AC motor drive with 24v Desyn Tx unit, slip ring unit etc. with cir. £23. **SSB ADAPTORS** part of Army R234 Rx for 100Kc I/P as 3 filters giving U & L sinband & carrier extraction provides low level audio out uses 22 min valves reqs ext pwt & 100Kc drive with book on 19" panel. £35. **ARMY MAST KIT** 36/48ft comprises 13x4ft6" sections 2 1/2" dia (12+1 spare) rated loading 50lb at 36ft supplied with guys, stakes, base etc sections have swaged ends with locating pegs new cond. £135 or £115 collect. **METER PANELS** fitted with 4x1 Ma 1" dia meters in box 5x2x2". £14.50. **FREQ CONV** Racal RA70 converts 100Kc IF o/p of RA17 Rx to give 14Kc signal to drive PV.78 FSK units, contains 114Kc crystal in small oven, 6AS6, 6AU6x, & 6X4 rect valves, O/P trans 600 ohm (will handle AF down to 300c/s) mains 240v p.u. with C trans 240v 40 Ma plus 2x 6.3v, HT choke, etc. on 19" panel size 3 1/2" high 12 1/2" deep, with outer cover. Provides basis for 100Kc Cal unit with change of crystal, will accept wide range of I/P freq and O/P stage will provide audio down to 300c/s, spare room in case for mods etc. with circ. £23. **CRYSTAL CALIBRATOR** bench type cal unit 1/10 Mc/s with harmonics to 500 Mc/s made by R&S for 240v tested. £35. **TRANS CVT TYPE** for 190/260v 50c I/P provides req O/P 230v at 500 watt. £65. **BATTERIES** nom 6.75v mercury type not rechargeable 2 1/2" x 1 1/2" Cap 2 A/hr at 100 Ma cont discharge new 8 for £6.50 or 16 for £11.50. **TEST SET** in neat metal carry case with hinged lid size ext 11x8x6". £7.50. ea or 2 for £12. **CONT. METEOR** No. 1 Mk. 2 portable type Geiger Counter as meter Ind 0.1 to 10 Mill/Rongt also O/P for phones two part unit in carry case with inst circ etc. reqs 300v DC200 Ua circ of suitable transis Inv supplied, tested. £45. **OPTICAL ACCS** mostly new spares inc eyepiece, lens cell 40m prisms, mirrors, lenses etc. 10/12 items. £25. **AERIAL SWT TYPE J** part of R1154/55 aircraft equip, boxed. £18.50. **ARMY AFV SPEAKER** semi weatherproof in case size 5 1/2" dia 3 1/2" deep spk 2.5 ohm new cond. £11.50. **AIRCRAFT H.F.A.E.** electrically operated trailing aerial approx 125ft motor drive 24v with connectors misc fittings circ etc. new cond provides remote ind of length. £35.

Above prices include car/postage & VAT.

Goods ex equipment unless stated new.

SAE with enquiry or 2x22p stamps for List 45/2

A.H. SUPPLIES

Unit 12, Bankside Works, Darnall Rd, SHEFFIELD S9 5HA.
Phone. 444278 (0742)

Dayton Hamvention '91

**SPECIAL
FEATURE**



Regular readers of *Practical Wireless* will no doubt have read George Dobbs G3RJV's account of his trip to Dayton this year. We're sure that many of you will have thought about going in 1991. That's why we've put together a very special package deal for *PW* readers.

The full details are on page 34 and 35, but before you look at them, perhaps you should read about my experiences as an **independent** traveller to this year's show and see why it's easier to let *PW* 'take the strain'!

I went to Dayton to see if it was feasible for us to have a stand there, to chat to a few of the American dealers who have expressed an interest in advertising in *PW* and to meet some of the staff from the American magazines.

As we are a small independent company, Concorde was out and I had to shop around for the lowest air fare that I could find. After days of 'phoning around the bucket shops I eventually realised that the prices quoted in their advertisements were never available on the days that I wanted to travel.

I finally settled for flying into Chicago for about £350. This may seem a bit out of the way, but as Dayton is not an international airport it is not normally possible to get a direct flight.

The Journey

I set off from Heathrow airport on the Thursday morning and arrived in Chicago some 10 hours later. Chicago's O'Hare airport is not very well laid out. It took me some time to find the courtesy bus that I needed to take to pick up the hire car that I had booked from England.

After an hour or so of wandering around I found the bus and was taken to the rental company depot. Here, a very go-ahead young man at the reception desk tried to persuade me to take out various levels of insurance. The *Practical Wireless*, November 1990

insurance costs would have more than doubled the cost of hiring the car.

Despite his dire warnings as to the possible consequences, I declined his offers and set off armed with the totally inadequate little map that seems standard issue from all American car hire companies.

Different Driving

Driving on the right-hand side of the road is not as difficult as you may imagine (but please don't practice on the M1 before you go), especially as most Americans are very considerate drivers. The biggest problem for me was sitting on the wrong side of the car!

On the Right Road

After circling the airport a few times, I eventually found the road with the right number but according to my map it should have been running north-south whereas all the signs read east or west.

I decided to take a chance and drove up the next slip road onto the freeway. That this was a mistake, became evident some hours later when I realised that none of the exit signs coincided with the towns on my planned route.

Heading For Canada

I turned off and managed to find a convenience store that sold Rand-McNally maps - definitely the ones to go for. When I explained to the cashier that I had been trying to drive from Chicago airport to Dayton, she laughed and said that it was a good job that I had stopped when I did because I was heading for Canada!

I was soon back on the right road, going the right way

*Roger Hall
G4TNT invites
you to join us on
our special trip
to Dayton '91 -
letting PW take
the strain!*

and looking forward to seeing Dayton and about nine hours later I did! You cannot imagine the frustration of a 55 miles per hour speed limit on long straight multi-carriageway roads that disappear over the horizon.

My day had started when I got up at 5 o'clock Thursday morning, and it ended when I settled into bed at the hotel at 6 o'clock Friday morning, English time.

Lucky Choice

I was extremely lucky with my choice of hotel. The decision for me to go to Dayton was not taken until a few weeks before the show and I had booked into the only hotel that had a vacancy. Unfortunately it was some 40 miles outside town, as Dayton gets very full at Hamvention time.

The weekend before I was due to leave I had been talking to Terry Edwards of Radio Shack at the RSGB show in Birmingham. He told me that he had booked in at the Radisson Inn, which although expensive was right in the middle of things, but now found he couldn't go.

He was going to cancel his room the following Monday and suggested that I use his reservation. I accepted and as it turned out, this was an incredible piece of luck as the Radisson is where everyone from *Ham Radio*, *CQ* and *Popular Communications* stay every year.

I had a great time in the Hotel. There are two eating places just opposite the Radisson - and you'll get good value for any meal bought. There's 'Big Boys' - which specialises in outsize burgers - and 'Roy Roger's Family Eaterie' which, contrary to local stories, does not specialise in 'Triggerburgers'.

Alternative Activities

If you read George Dobb's article there's no need to tell you about the show itself, other than to say it really is the biggest and the best. It also boasts plenty of alternative activities such as jewellery making, pottery and so on.

Courtesy buses take visitors to and from the hotels, the enormous shopping malls and local places of interest. These include places such as the Wright Brothers Museum, as Dayton was their home town. There is also a great deal to do in the evening with much socialising!

I went to the hotel where the ATV enthusiasts were having a meeting. I met up with Andy Emmerson - ATV contributor to 'Backscatter' in *PW* - and we watched an interesting video that had been shot from a camera mounted on a model 'plane'. The 'plane' was in the car park and we had a play with that and with a kite equipped in the same fashion.

Heading Homewards

Monday came around all too soon and at 8am I set off for home. This time I didn't get lost and at 3pm I was at the airport check-in desk.

My flight was not until 7pm, but I always like to check in early so that I can book my favourite seat and get rid of my luggage. I also usually book in before returning the hire car as this means that I can then have a few hours sightseeing without having to worry about looking after my belongings.

Cancelled Flight

This time it was just as well that I had not returned the car as the girl at the desk casually informed me that they had cancelled my flight! There was no explanation as to why, only the suggestion that I should return at the same time on Tuesday.

It seems that the big red sticker on the front of my 'bucket shop' ticket - which I had not bothered to read -

absolved them from all responsibility for delayed or cancelled flights!

Wilting Plastic

Feeling a little 'down', I did what most Americans seem to do when they feel low - and went straight to the shops. I drove out to the Woodfield shopping mall, which has more than 500 shops and is one of the biggest in America.

I then booked into a local hotel and spent the rest of the day spending money until my credit card started to wilt.

On Tuesday I went back to the airport, checked in a suitcase that was noticeably heavier than it had been the day before and sighed with relief that this flight had not been cancelled.

I also met a very nice American cop as I'd parked in an area where a large sign had advised me not to park. While I was at the desk the car was in view, and I noticed this cop walking towards it with a large book of tickets in his hand.

Leaving the desk I rushed out and explained to him that I was just checking in and would be finished in a few minutes. Instead of the 'Never mind that. You can't park here' reaction that I had expected, he asked which airline I was using. When I told him that it was TWA he said "American eh? OK take as long as it takes".

Tourist Tips

I met him again as I was leaving the airport and I thanked him for letting me park. We chatted for a while and when he discovered that I had been bumped off a flight the previous day and now had the rest of the day to kill, he spent about half an hour telling me all about Chicago.

The policeman told me the best route into town, avoiding all the traffic, the best sightseeing places and even where to park. He also told me about the areas where it is not safe for a tourist even to drive through.

As a result of that conversation I had a very enjoyable day in Chicago. I saw all the usual sights and some that I would never have found without his help. I also found some beautiful sandy beaches with palm trees, which rather surprised me as Chicago is at least 1000 miles from the sea!

I had forgotten about Lake Michigan, a lake so big that it could easily be mistaken for a sea. The one bad feature of that day were the terrible driving standards in the city centre.

It seems that big city drivers are the same the world

DAYTON '91 - A PW SPECIAL 26-28 April

Many amateurs have dreamed of visiting Dayton Hamvention but have been put off by the cost and the normally awkward journey. Now readers can take advantage of the very special deal we have put together. The Dayton trip leaves the UK on the Thursday before the show and returns on the following Monday.

Included in the price is the air fare, four nights accommodation, transport to and from the airport and a three-day pass to the show.

Courtesy buses will be provided to take us to and from the show, the shopping malls and local places of interest. Food is not included in the price, but anyone who has eaten out in America will know that this is a minor expense.

See us at the Leicester show for more details but please do try to book early as the number of places is very limited and bookings will be dealt

over and drivers of yellow cabs are far worse than their London counterparts. I certainly annoyed a few of them when I did a U-turn on Michigan Avenue, the main thoroughfare, but years of driving in central London have taught me that cabbies don't really mean what they say about your parents.

Confused Customs

I arrived back in England on Wednesday morning, Tuesday night having mysteriously disappeared somewhere over that Atlantic due to the time difference. It took me a long time to clear Customs because I had bought so much that the officer had some trouble working out the duty payable.

It's a great temptation to spend money in America as everything is so cheap. Petrol's only about 60p a gallon and everything else is considerably less expensive than in the UK.

Clothing, cameras, electrical goods and so on cost about the same in dollars as we pay in pounds, with some things costing even less!

Heathrow Hassle

I had just one more mishap, this time on my way out of the airport. I couldn't find my car park ticket. Anyone who has parked at the long term car park at Heathrow will know how big it is.

There are hundreds upon hundreds of rows of cars and dozens of bus stops. Although I had carefully noted the number of the row where I parked and the letter of the nearest bus stop, I had written them on the car park ticket.

The problem was simply resolved by emptying the entire contents of my luggage onto the airport floor and searching until I found the ticket. It was the final straw that made me determined to be a little more organised next time!

Flying PW

It's not easy, and not cheap as an independent traveller. That's why we've arranged a special *PW* trip to Dayton in 1991. The show will be held 26, 27 and 28 April next year and we have organised a complete package that will get you there without the trials and tribulations that can beset the independent traveller.

We leave from London on the Thursday before the show and after a 'plane change in America, we fly into

Dayton on Thursday afternoon. Luxury coaches will take us directly to the Radisson Inn where we will be staying until Monday morning.

Throughout the show courtesy buses will be available from the hotel and from the show area. These will take you to almost anywhere you would want to go in Dayton, including to and from the Radisson. The package also includes your admission tickets for all three days of the show.

We leave Dayton on the Monday morning and fly back to London, arriving either late Monday night or early Tuesday morning.

Big Saving

The normal price for a return flight to Dayton is approximately £550 as it involves a change and because it's not one of the usual holiday destinations.

The Radisson Inn is an up-market American hotel that usually charges \$80-\$90 a night and the tickets to the show will cost about \$15 each. On top of this we will be providing coaches to and from Dayton airport.

However, the total cost for our trip, including admission to the show, is just £499 per person. This price is based on two people sharing a twin-bedded room but does not include meals. The offer is strictly on a first come, first served basis, as there are only a limited number of places available.

Seat Reservations

If you don't want to miss this holiday of a lifetime, just fill in the coupon and send it in as soon as possible. A £50, non-refundable deposit will be payable to secure a place, but you need only return the coupon if you just want to register your interest without commitment.

Full payment will be due before the end of February next year and we will accept cheques made payable to P.W. Publishing Ltd, letters containing your Access or Visa numbers or telephone credit card payment on (0202) 665524.

Extended Holidays

We have quite a flexible arrangement with our agent. It may be possible for you to extend your stay or to visit another part of the States while you are there. If you'd prefer this idea, drop us a line and we will do our best to accommodate you.

PW

AL OFFER Fly To The World's Best Amateur Radio Show With *PW*!

with on a first come first served basis. Just fill in the coupon and return it to: DAYTON OFFER, PW PUBLISHING LTD, ENEFCO HOUSE, THE QUAY, POOLE, DORSET BH15 1PP.

PW READER'S PRICE JUST: £499

This price is based on two people sharing a twin-bedded room. The number of places are strictly limited to the first 200 people who make a firm booking.

Not included in the price, but highly recommended, is an optional medical insurance cover at a cost of £30.

Prices quoted are based on air fares and Hotel prices as we go to press in September 1990. Readers should be aware that due to the present International situation, prices, booking conditions and arrival times in April 1991 may be subject to changes.

☐ I AM INTERESTED IN THE *PW* TRIP TO DAYTON '91.

☐ PLEASE SEND ME FURTHER DETAILS.

☐ I ENCLOSE £50 DEPOSIT.

☐ I ENCLOSE £499 IN FULL PAYMENT.

NAME

ADDRESS

.....

.....POSTCODE

ACCESS OR VISA CARD NUMBER

EXPIRY DATE SIGNATURE

If you do not want to deface your *PW*, a photocopy of this coupon will be acceptable.



0202 665524

PCB SERVICE

Printed circuit boards for *Practical Wireless* constructional projects are available from the PW PCB SERVICE. The boards are made in 1.5mm glass-fibre, and are fully tinned and drilled. All prices include postage, packing and VAT for UK orders.

Orders and remittances should be sent to: **PW Publishing Limited, FREEPOST, Enefco House, The Quay, Poole, Dorset BH15 1PP**, marking your envelope **PCB SERVICE**. Cheques should be crossed and made payable to PW Publishing Ltd.

When ordering, please state the Article Title and Issue Date as well as the Board Number. Please print your name and address clearly in block letters, and do not send any other correspondence with your order. You may telephone your order using Access or Visa. A telephone answering machine will accept your order outside office hours.

Please allow 28 days for delivery. Always check the latest issue of PW for the current details of price and availability. Please enquire for p.c.b.s not listed here.

Board	Title of Article	Issue	Price £
WR276-80	MARLAND SET (7 BOARDS)	SEPT 90	21.50
+263/4	TRANSMITTER		
WR272	NICAD RECYCLER	JUNE 90	6.92
WR275	LOW VOLTAGE ALARM	JUNE 90	6.36
WR273	VALVE PSU	MAY 90	6.86
WR274	RX ATTENUATOR	MAY 90	5.72
WR271	PRODUCT DETECTOR	APRIL 90	4.95
WR270	BADGER CUB	APRIL 90	4.94
WR269	GLYME	FEB 90	6.70
WR268	IRWELL (r.f. p.a.)	FEB 90	6.00
WR264	IRWELL (relay)	FEB 90	5.00
WR263	IRWELL (vfo)	JAN 90	6.00
WR267	FORTYNINER	JAN 90	6.00
WR266	TUNED ACTIVE ANTENNA	JAN 90	5.60
WR265	TUNED ACTIVE ANTENNA (psu)	JAN 90	5.60
WR262	REPEATER TIME-OUT	DEC 89	4.82
WR261	AM TX FOR 1.8MHz	NOV 89	6.50
WR260	10MHz RECEIVER	OCT 89	5.00
WR259	10MHz RECEIVER	OCT 89	5.00
WR258	10MHz RECEIVER	OCT 89	5.00
WR257	LOW BATTERY WARNING	SEPT 89	5.88
WR256	ACTIVE FILTER	AUG 89	6.96
WR254	TX CONTROL FOR MOBILE USE	JULY 89	5.08
WR253	TS940S MODIFICATION	JUNE 89	5.54
WR252	TWO TONE OSCILLATOR	MAY 89	6.52
WR251	RF OPERATED RELAY	FEB 89	3.80
WR250	DC/AC POWER CONVERTER	JAN 89	3.22
WR249	"MARLBOROUGH" MF CONVERTER	DEC 88	4.60
WR248	"BADGER" 144MHz RECEIVER	OCT 88	9.10
WR247	ZENER DIODE TESTER	AUG 88	3.58
WR246	"PORTLAND" RF VOLTMETER	JULY 88	3.59
WR244	PRACTICE MORSE KEY	JULY 88	2.96
WR245	STOPBAND FILTER FOR PW BLENHIEM	JUNE 88	2.90
WR243	VHF MONITOR RECEIVER (AUDIO)	APRIL 88	2.30
WR242	"ORWELL" VARICAP TUNE OPTION	MAR 88	6.00
WR241	"ORWELL" MED. WAVE RECEIVER SET	MAR 88	
WR240	"	"	9.10
WR239	"	"	
WR238	"OTTER" 50MHz RECEIVER	JAN 88	7.10
WR237	RTTY TUNING INDICATOR	NOV 87	5.20
KANGA	HIGH STABILITY VFO (see issue)	OCT 87	-
WR236	"BLENHIEM" VHF CONVERTER	SEPT 87	7.00
WR235	MAINS ON/OFF FOR BATT RADIOS	SEPT 87	3.00
WR234	SIDE-TONE OSCILLATOR	JUNE 87	2.70

Board	Title of Article	Issue	Price £
WR233	"DOWNTON" F-V CONVERTER	JUNE 87	3.90
WR232	"AXE" SIGNAL TRACER	MAY 87	
WR231	"	"	9.20
WR230	"	"	
WR228	"BLANDFORD" RECEIVE CONVERTER	APRIL 87	
WR227	"	"	9.70
WR226	"	"	
WR298	"ITCHEN" LCR BRIDGE	APRIL 87	5.85
WR225	"WOODSTOCK" SW CONVERTER	MAR 87	4.10
WR219	MASTHEAD PRE-AMP PSU	FEB 87	2.50
WR218	MASTHEAD PRE-AMP FOR 144MHz	FEB 87	4.20
WR224	"WESTBURY" BASIC WOBBULATOR	JAN 87	3.50
WR214	MOD SRX-30D (AUDIO)	DEC 86	3.00
WR223	HIGH-IMP MOSFET VOLTMETER	DEC 86	2.90
WR222	"TAW" VLF CONVERTER	NOV 86	5.80
WR216	LF BANDS ACTIVE ANTENNA	NOV 86	2.40
WR220	GET STARTED LOW-COST CONVERTER	OCT 86	2.40
WR215	SIMPLE 50MHz CONVERTER	SEP 86	3.60
WR213	MOD FRG-7 (CARRIER Osc)	JUN 86	2.70
WR210	"ARUN" PARAMETRIC FILTER	MAY 86	8.10
WR211	"MEON" FILTER (SMALL)	APR 86	3.10
WR209	SIMPLE AUDIO OSCILLATOR	MAR 86	4.30
WR208	RF SPEECH PROCESSOR	MAR 86	4.10
WR207	CRYSTAL CALIBRATOR	JAN 86	2.10
WR206	RTTY/MORSE MODEM (Plug-in)	JAN 86	2.80
WR205	RTTY/MORSE MODEM	JAN 86	5.40
WR204	WQ MEDIUM WAVE LOOP	NOV 85	3.00
WR203	SIMPLE CAPACITANCE METER	OCT 85	2.80
WR199	"MEON" 50MHz TRANSVERTER	OCT 85	6.70
WR202	ECONOMY UHF PRE-SCALER	SEP 85	3.70
WR201	ADD-ON BFO	AUG 85	2.50
WR200	LOW-COST CRYSTAL TESTER	JUL 85	2.50
WAD302	BATTERY CHARGER CONTROLLER	JUN 85	3.00
WR197	"COLNE" (Osc/Converter)	JUN 85	3.90
WR198	"COLNE" (Product Det/Audio)	MAY 85	3.90
A005	"COLNE" (VFO)	APR 85	3.10
A004	"COLNE" 3.5/114MHz RX (RF Amp)	APR 85	3.10
WAD249	MOD FRG-7 (BFO)	FEB 85	3.00
WAD280**	TRIAMBIC KEYS	FEB 85	7.10
WA002	"TEME" (RECEIVER)	JAN 85	6.55
WA001	"TEME" (VFO/DOUBLER)	DEC 84	5.19
WR178	DART (Audio / change)	DEC 84	3.00
WR177	DART (p.a.)	NOV 83	3.00
WR176	DART (v.f.o.)	NOV 83	3.00
WAD246	"DART" FOLLOW-UP	DEC 84	4.00
WR196	"TEME" 7/14MHz WRP (TX)	NOV 84	3.70
WR195	STABLE TONEBURST	NOV 84	2.60
WR194	MOD FRG-7 (FM/SQUELCH)	NOV 84	4.50
WR189/92 Pair	BUG KEY WITH 528-BIT MEMORY	OCT 84	8.50
WR190	MOD FRG-7 (SWITCHING)	OCT 84	4.50
WR187	MORSE SENDING TRAINER	JUL 84	4.50
WR185	AUTO-NOTCH FILTER	JUN 84	6.50
WR183	TOP-BAND DF RECEIVER	APR 84	6.50
WR179	TRANSCIEVER VOX UNIT	MAR 84	7.50
WR181	"MARCHWOOD" 12V 30A PSU	JUL 83	4.20
WR185 ect set	"SEVERN" 7MHz QRP TX/RX	-	14.90
WR169	"SEVERN" (TRANSMITTER)	JUL 83	6.50
WR168	"SEVERN" (CH.OVER/SIDETONE)	JUL 83	6.50
WR166	"SEVERN" (RECEIVER/AUDIO)	JUN 83	6.50
WR165	"SEVERN" (VFO)	JUN 83	5.20
WR167	RTTY TERMINAL UNIT FOR ZX81	JUN 83	7.80
WR160	LMS REGENERATIVE RECEIVER	FEB 83	5.20
WR156	REPEATER TIME-OUT ALARM	NOV 82	5.20
WR143	ATV CONVERTER	APR 82	7.10
WR144	IAMBIC KEYS	MAR 82	6.50
WR126	"EXE" 10GHz TRANSCEIVER	AUG 81	7.70
WR095	TRANSCIEVER POWER SUPPLY	SEP 80	3.85
WR068	AF SPEECH PROCESSOR	JAN 80	5.20

HAVING DIFFICULTY GETTING YOUR COPY OF PRACTICAL WIRELESS ?

Be sure of getting your copy of PW each month. Place this regular order form with your newsagent... today

Dear Newsagent,

Distributed by Seymour

please reserve / deliver my monthly copy of PRACTICAL WIRELESS

NAME

ADDRESS

Signed

AMATEUR RADIO COMMUNICATIONS LTD.

AUTHORISED ICOM, YAESU AND STANDARD DEALER



HX-240 2m TO
HF Transverter

£249

- ★ Frequency Coverage: 80m, 40m, 20m, 15m, 10m
- ★ Output Power: 30-40W (SSB/CW)
- ★ Rx Pre-amp Gain: 8-10dB
- ★ RF Drive: 2.5/10W (Selectable)
- ★ Hi-Lo Output (Selectable)
- ★ Carrier or Remote switching
- ★ Visual Antenna mismatch indication
- ★ Power Requirement: DC 13.8V, 7A



ALINCO
DJ-120

£179

- ★ 2M handheld transceiver
- ★ 2.5w (6.5w option)
- ★ 10 memories
- ★ Simple operation
- ★ Fantastic value

NOW IN STOCK
The Ultimate in Pocket
Scanners

NEW
FAIRMADE HP-100

- ★ 25 550 830 1300Mhz coverage
- ★ 1000 channel memory
- ★ 10 independent search bands
- ★ Complete with incas 2 antennas carrying case etc

£249

Phone for more details

We have the new
STANDARD C5600
Dual Band Mobile



Phone for best price



STANDARD C-528

- ★ Direct 13.8V in for 5 Watts out.
- ★ VHF 2.5W, UHF 2W with CNB151 NiCad pack.
- ★ Dual displays
- ★ Power save function.
- ★ Multiple memories.
- ★ Priority channel.
- ★ Tone squelch (option)
- ★ Programmable offsets.
- ★ Coded paging function.
- ★ Various scanning modes.
- ★ Programmable step sizes.
- ★ 144-146 VHF, 430-440 UHF, 800-975 Rx only.
- ★ Separate Vol. & Squ. controls for each band.

PRICE £379

SEE YOU AT
LEICESTER SHOW
STAND S10

For some of the **best deals** at the show, come and see **US!** We will have on display all the latest equipment from the leading manufacturers.

OUR AIM IS 100% SATISFACTION

ALWAYS A GOOD SELECTION
OF SECOND HAND AND
COMMISSION SALES, PHONE
FOR MORE INFORMATION.

STOP PRESS: SHOW SPECIAL
FT 747GX (UK SPEC. MODELS)
£549 incl. CW & AM filters



38 Bridge Street, Earlestown, Newton-le-Willows,
Merseyside WA12 9BA. Only 1 mile from Junction 23 — M6

Telephone: N-le-W (09252) 29881

Fax No: 09252 29882

OPEN TUES-SAT 10 a.m. - 5 p.m.



INSTANT FINANCE AVAILABLE SUBJECT TO STATUS

Prices correct at time of going to Press.

E & OE.

MICROWAVE MODULES • TONNA • JAYBEAM • SANDPIPER • BNOS • AKO • CAPCO • REVEX • STANDARD

HENRY'S

ELECTRONICS

DISTRIBUTORS

ELECTRONICS DISTRIBUTORS FOR TRADE,
INDUSTRY, EXPORT, EDUCATION AND HOBBYISTS

BIG DISCOUNTS
FOR EDUCATION
AND QUANTITY

- Tools/Service Aids
- Test Instruments (UK's largest in-stock Range)
- Communications
- Public Address/Disco Equipment
- Security/CCTV/Doorphones/Alarm Systems
- TV, Video Distribution
- Speakers for Hi-Fi, in car, PA and Disco
- Components, Audio, TV, Video, Telephone and Computer Accessories


SPECIAL OFFERS

Dmm was (£18.95) **£13.95**
(30 models stocked)
1 kw outdoor PIR Lights con-
troller was (£32.95) **£19.95**
VHF/UHF TV/FM Amplifier
was (£11.95) **£9.95**
Analogue MM 27 Ranges
CAP/Hfe/Temp/10A AC/DC
etc. was (£39.95) **£29.95**
ALL PRICES INCLUDE VAT

FREE CAR PARKING

Two Car Parks (Bell and Church Streets).
Present your ticket when purchasing and
get one hour as discount.

OPEN 6 DAYS A WEEK FOR CALLERS
AND TELEPHONED ORDERS



CATALOGUES IN COLOUR

- Instruments
 - Security
 - Supplements
 - Components
- Ask Henry's first
£1 for callers: large
SAE £2 stamp UK
by post (Export
£5.00) Free to
Education with
Trade Prices

HENRY'S AUDIO ELECTRONICS

404 Edgware Road, London W2 1ED
Instruments/Audio 071-724 3564
Security/Communications/CCTV 071-724 0323
Components 071-723 1008 Fax: 071-724 0322
Trade/Education/Export 071-258 1831
Account facilities available.

MARCO TRADING

ELECTRONIC COMPONENTS
& EQUIPMENT

MAIL ORDER • WHOLESALE
RETAIL




LATEST 1991 CATALOGUE
AVAILABLE NOW

- ★ Free pre-paid envelope
- ★ Many new lines
- ★ Pages of special offers
- ★ Free gifts

SEND: £1.50 to:
Marco Trading
Dept PW10
The Maltings
High Street
WEM Shrewsbury
SY4 5EN
Tel: 0939 32763

MARCO
TRADING
1991 £1.50

ELECTRONIC COMPONENTS
& EQUIPMENT
CATALOGUE



CB CORNER

There is a very welcome wind of change blowing through the dusty corridors of powers in the offices that regulate wireless communications in this country. The establishment of the Radiocommunications Agency (RA) within the DTI has borne immediate fruit in the plans for the proposed novice licence. Something that should tempt quite a few CBers to take the plunge and become licensed amateurs. The debate has just begun, and doubtless there will be strong opinions on both sides. Particularly about allowing access to the cherished segments of the airwaves, and the comparative freedom to use complex and costly equipment

by relatively untrained, but not necessarily in radio terms, inexperienced operators.

I have nothing new to add, other than to say that the arguments, both for and against, have been trotted out with monotonous regularity at every change in the system and the laws from the year dot. Despite the doom and gloom merchants, anarchy still hasn't broken out on the airwaves. Possibly the reason for this is that most users of personal communications systems are sensible folk who seem to be able to live together more or less harmoniously.

The general relaxation of attitudes by the establishment is good news but RA officials have confirmed that there will be no let-up in tracking down the small number of idiots who persist in using powerful linear amplifiers or 'burners' to boost their infantile, and mainly incoherent rambling waffle. I find this surprising. It seems incredible that disgustingly 'dirty' burners are readily available. The problems they cause, from t.v.i. to interfering with vital services, still goes on. The yellow Post Office vans with their distinctive directional antenna systems, filled also with the dreaded 'buzzies', were a familiar sight in the early days. Due to their endeavours numerous 'cowboys' were brought to book. Either the authorities are using more discreet methods or they have scaled down their activities. This must be the case as I cannot

recall seeing, or hearing of any significant prosecutions recently.

Tale Of Two Events

I know I have prattled on about the usefulness of CB for marshalling public events, but a couple of weeks ago I witnessed two genuine human tragedies that owe their wholly successful and speedy outcome to CB radio. Perhaps on the scale of world tragedies these were comparatively small-beer. Though in the mind of the small lost two-year-old child, the end of the world must have seemed very close. However the child was delivered into the safe keeping of one of the marshalls who quickly made a call to their base station. An immediate announcement was made over the p.a. system and within minutes mother and child were tearfully and joyfully reunited. The event in question was held in a large and very crowded farmer's field and sooner or later there is no doubt that the reunion would have taken place, but CB radio cut the worrying time to an absolute minimum.

Case Number Two

The second example occurred the following week and could quite easily have had a more serious outcome. The threat of rain at an event lead to a sudden and unexpected exodus. Cars were 'gridlocked' as drivers made for all available exits at

once. Tempers were becoming very frayed, as one bold middle-aged driver took it upon himself to try and control the flow of traffic from competing exits opening onto the one small track leading onto the main road. Angry motorists simply ignored his well intentioned efforts.

Then the inevitable happened. He keeled over, clearly in the throes of a stroke or heart attack. A nearby marshal summoned help on her CB, which lead to an ambulance being called immediately, at the same time an appeal for medical aid went out over the p.a. system. Fortunately a trained ambulance officer, caught up in the jam, was able to resuscitate the victim and so limit the severity of the attack. Happily for the victim it turned out well. The prompt attention he received on site saved his life. Had it, due to poor communications, been unavailable he would most probably have died before the ambulance arrived.

The Verdict

Citizens band radio has had a rough ride over the years and frankly some of the adverse publicity earned in this time has been justly deserved. These two incidents though, illustrate the other side of the coin. It still has a valuable role to play and there are quite a few people around who literally owe their lives to this simple and accessible communications system.

Errors & Updates

Earth Tuner October 1990 page 21/22.

Godfrey Baillie-Searle GD4EIP advised us that the following description of how to use the earth tuner may be in order.

The Earth Tuner In Use

The earth from the transceiver is connected to the input post of the earth tuner and the existing earth wire or any length of wire is connected to the output post.

The capacitor C1 and resistor R1 are both set to about mid-range, and using a low power output from the transceiver, tune the inductance control S1 for a maximum deflection on the meter M1. Then at this setting and using R1 to keep the reading on M1 below full scale, adjust capacitor C1 for a peak reading on the meter. At this point the chosen earth wire is working with peak efficiency.

Instruments For Weather Observation October 1990 page 40 in the '8-page Weather Special'.

In column 1 on page 40 under the section labelled 'The March Of Time', a slip on the editorial keyboard changed one word which altered the sense of the paragraph. The paragraph in question starts "Sporadic-E can occur at any time.....". This should have read "Tropospheric propagation can occur at any time..."

A similar twitch removed a sentence in the paragraph 'The Barograph Explained'. After the first sentence add "It may be compared to a pen recorder used to record measurements of an electrical nature", then continue reading.

We apologise to both Ron Ham, the author of the instrumentation article, and to our readers for these errors.

★★THE LEICESTER★★ AMATEUR RADIO SHOW COMMITTEE

**NOW EVEN
BIGGER
AND BETTER**

INVITE YOU TO THE

**MORE THAN
EIGHTY
EXHIBITORS**

NATIONAL AMATEUR RADIO AND ELECTRONICS EXHIBITION

**AT THE
GRANBY HALLS
LEICESTER**



**ON
FRIDAY &
SATURDAY
OCTOBER
26th & 27th**

10.00 am - 6.00 pm

**BRING & BUY
STAR RAFFLE**

Admission—ADULTS £1
*Concessions for
Children and O.A.P.s*

Enquiries to Frank G4PDZ on 0533 553293

List of Exhibitors - Exhibition Hall


- 1 Coping with Cancer
- 2 Icom
- 3 **Practical Wireless/Short
Wave Magazine**
- 4 R.S.G.B.
- 5 Sandpiper Communications
- 6 2J Sound
- 6a R & D Electronics
- 7 ICS Electronics
- 8 Merlin Systems
- 8a Poole Logic
- 9 Jandek
- 9a Howes Communications
- 10 Ham Radio Today
- 11 Alan Kelly Communications
- 12 Lowe Electronics
- 13 Rich Electronics
- 13a T.W. Wraith
- 14 A1 Electronics
- 14a R.A.Kent (Engineers)
- 14b Technical Software
- 15 Amdat
- 15a Tennamast
- 16 Dataphone
- 17 Siskin Electronics
- 18 Wilson Valves
- 19 -----

List of Exhibitors - Sales Hall

- 1/2 Gemini Electronics
- 3 Taurus Electronics
- 4 Dewsbury Electronics
- 5 Greens Telecom
- 6 Elliott Electronics
- 6a Lake Electronics
- 7 Microwave Modules
- 8 South Midlands
Communications
- 9 JPE Computers
- 10 Amateur Radio
Communications
- 11 MGR Communications
- 12 Weirhead
- 13 Display Electronics
- 14 Strumech Engineering
- 15 Waters & Stanton
- 16 JMG Electronics
- 17 Mutek
- 18 Dressler Communications
- 19 Dressler Communications

- 20 Heatherlite
- 21 KW Communications
- 22 Eastern Communications
- 23 H. Morgan Smith
- 24 UMF
- 25 Anchor Supplies
- 26 Barenco
- 27 J.Birkett
- 28 R.J.Holderness
- 29 R.J.Holderness
- 30 Syon Trading
- 31 Cap.Co
- 32 Altron Communications
Equipment
- 33 Arrow Electronics
- 34 Marco Trading
- 35 SGS Electronics
- 36 Raycom Communications
- 37 J.A.B. Electronic Comps
- 38 J & P Electronics
- 39 Stevens Electrical
- 40 M & B Radio
- 41 ARE Communications
- 42 Nevada

- 43 Brial Service
- 44 Trident Electronics
- 45 Astley Videos
- 46 Procomm
- 47 R.A.S. (Nottingham)
- 48 Computer Junk Shop
- 49 Hillards
- 49a Giacomelli
- 50 Westlake
- 51 Radiotronics
- 52 New Cross
- 53 Lee Electronics
- 53a Hilton Plant
- 54 TAR Aerials
- 55 SEM
- 56 Rollortec
- 57 Badger Boards
- 58 RN Electronics
- 59 Sitek
- 60 Dee Communications
- 61 Radio Shack
- 62 Grovesnor Software
- 63 Rollortec
- 64 Bonex

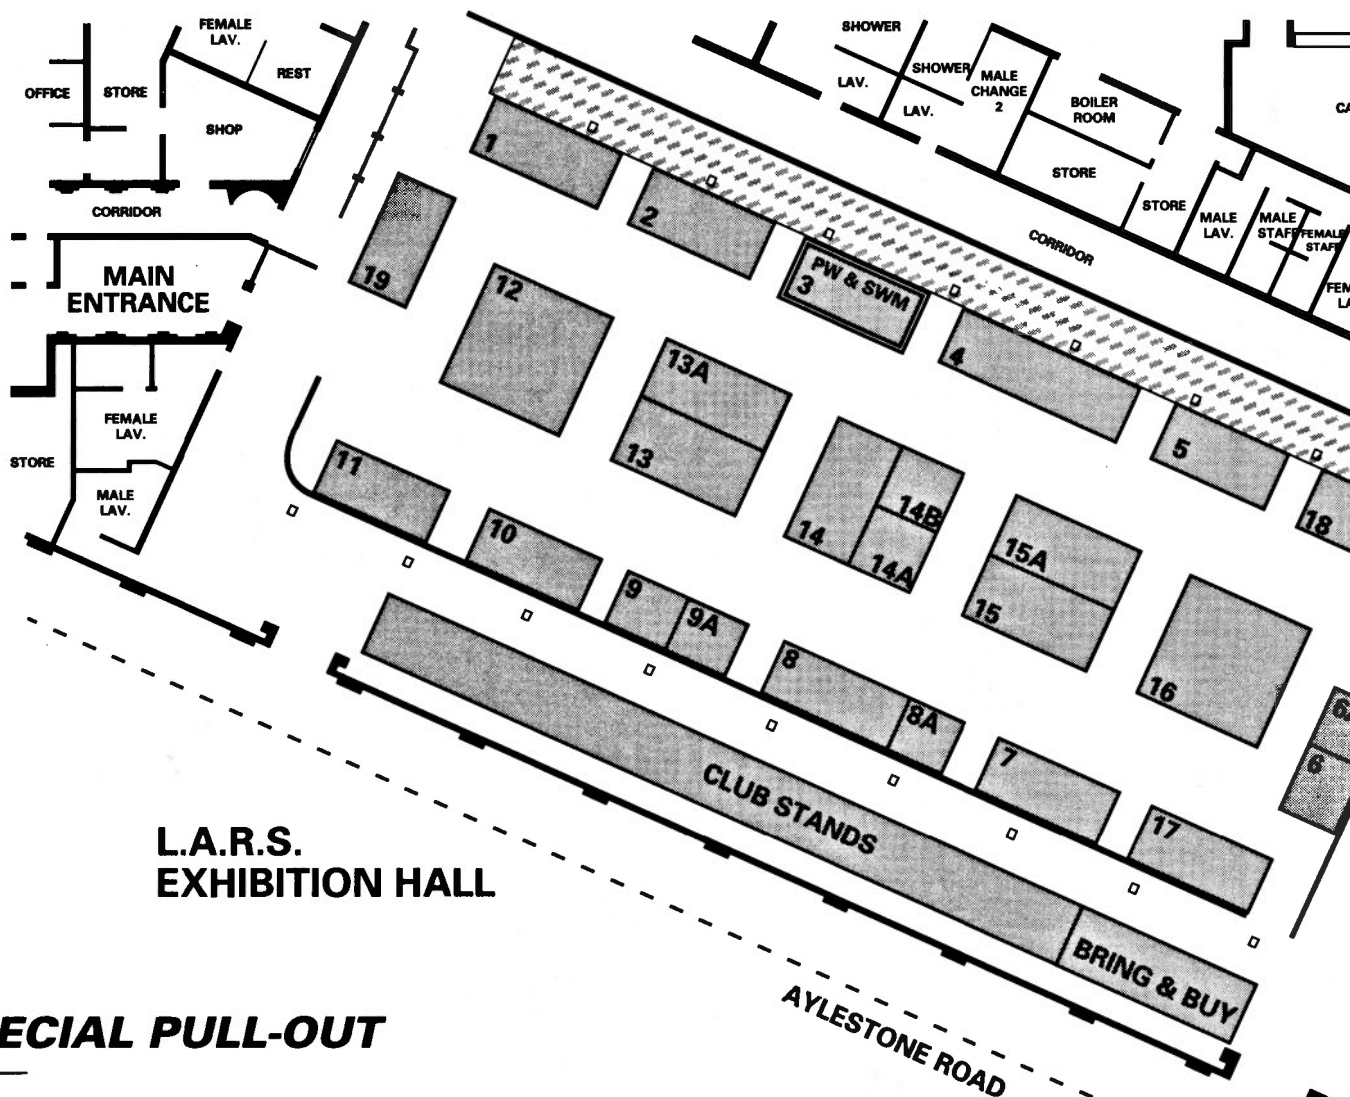

**L.A.R.S.
EXHIBITION HALL**

SPECIAL PULL-OUT

**SHOW GUIDE PRESENTED FREE WITH
PRACTICAL WIRELESS**

**VISIT THE PRACTICAL WIRELESS STAND FOR TECHNICAL BOOKS,
SUBSCRIPTIONS, SPECIAL SHOW OFFERS AND ANY QUESTIONS TO THE STAFF**

LEICESTER SHOW HALL LAYOUT & LIST OF EXHIBITORS



Stand number 3 in the Exhibition Hall of the Leicester Amateur Radio Show is where it's all happening. Come and meet Marcia Brogan and Elaine Richards G4LFM and don't forget to bring your PW discount vouchers!

Meet our Leicester Ladies!



PW Book Service Special Show Offers

- ★ Newnes *Amateur Radio Computing Handbook* offer extended to cover the Leicester Show. **£12.95**
- ★ PW reprint *Wires & Waves* - this best seller is available for **HALF** price only at the show!
- ★ *Practical Ideas for Radio Amateurs* **£3.95**
- ★ *ARRL Antenna Compendium* **£6.50**
- ★ Look for other 'end of line' book bargains and especially the popular *Guide to Utility Stations* and the American 'Callbook' - USA and International Listings - which will all be subject to special offers - stocks permitting.

All these offers and a great deal more for you at the *Practical Wireless* and *Short Wave Magazine* stand at the 1990 Leicester Amateur Radio Show, Granby Halls, Leicester on October 26 and 27.

Book Review

PW BOOK REVIEW

NEW 3RD EDITION!

VHF HANDBOOK FOR RADIO AMATEURS

FM theory, operation, procedure;
FM repeaters and FM equipment

VHF antenna design & construction;
New Log Periodic & Long Yagi beams

Satellite and Moon-reflection
communication; DX propagation
and how to take advantage of it

Solid-state circuits;
VHF amplifiers; VHF test equipment

HERBERT S. BRIER, W9EGQ
WILLIAM I. ORR, W6SAI

VHF HANDBOOK FOR RADIO AMATEURS
Herbert Brier W9EGQ and William Orr W6SAI
335 pages, £7.95

Available from PW Book Service, 85p post and packing

The 3rd edition *VHF Handbook for Radio Amateurs* is a difficult book to classify. It is a splendid history of v.h.f. and u.h.f. transmission history, and I was surprised to find out just how long ago it all started. There are also chapters on propagation, amateur satellites, moonbounce and v.h.f. components and noise.

This 335-page, A5 sized, book also manages to pack in many practical ideas. It is a source of information on building your own antenna systems, filters both bandpass and bandstop, test equipment, not forgetting transceivers and converters. Diagrams of antennas may be found covering the three major bands of 50, 144 and 430MHz. Complete with dimensions and hints to overcome most of the problems that beset the hobbyist when producing antennas.

At £7.95 it represents excellent value for money for both the novice searching for initial information and for the initiated searching for ideas to improve his or her present setup.

Space for antennas is at a premium for many radio amateurs. The problem can be greatest for anyone living in a flat or apartment. The AEA IsoLoop antenna is one approach to solving the problem. Rob Mannion G3XFD tried one and was surprised at the results.



AEA IsoLoop Antenna

REVIEW

The AEA IsoLoop HF Antenna 14/30, although new to the UK market, has been available in the USA for some time. The antenna was being advertised in all the American magazines that we receive in the *PW* office.

To be honest, at first I was not impressed with the appearance of the antenna. I was also extremely sceptical about the claimed performance of the unit. How could such a small loop such as this hope to be an alternative to a full size antenna? It didn't even look anything like antennas should!

Arrival Surprise

When the unit to be reviewed arrived I was in for a surprise. It was even smaller than I thought it would be after assembly. The assembly instructions supplied with the IsoLoop make the job very easy and I had little difficulty in mounting the loop into the main tuning housing.

I've already mentioned the instructions were clear, but I did find that one mounting bracket differed from the example shown in the supplied diagram. I soon got over this problem and had the assembled unit ready to mount.

As with all recently introduced equipment the buyer must be on the look-out for production line modifications. I'd already discovered one (the change in the design of a mounting bracket) but such changes can be of benefit at times as they can mean less assembly work.

Once I had assembled the IsoLoop the next job was to buy a suitable length of four core shielded cable, to connect the antenna to the remote controlled tuning unit. The remotely-controlled tuning facility is the real 'secret' of the IsoLoop as without it operation would be rather difficult to say the least.

With the unit on test I had to buy the cable and make up the supplied DIN plugs to each end. I understand from ICS Electronics, the UK agents, that AEA now supply a reasonable length of suitable cable with plugs already fitted.

When the IsoLoop was ready to attach to the 5m wooden pole (the only mast I had available) I carefully attached the antenna before erecting it in the garden.

Care In Cable Dressing

The main loop-tuning stepper motor is mounted inside a plastics housing. The housing can be removed by 'popper' type plastics re-usable rivets. The DIN plug of the remote control cable is applied to a DIN socket underneath the housing and AEA provide clear instructions that care is needed 'dressing' both the 50Ω feeder cable and the control cable for best results.

I must admit that (knowing our climate) I was surprised that un-protected DIN plugs and sockets were being used in an environment that would expose them to the 'elements' (forgive the dreadful pun!). If the antenna was to be erected for any length of time outside I would certainly wrap and seal all the external connections with self-amalgamating tape and silicone grease.

On The Air

As I had not been impressed with the antenna at first sight, I started the 'on air' tests with some foreboding but these thoughts soon disappeared as the DX appeared on my rig. For the tests I used my KW2000B transceiver for 14 and 21MHz and also a converted multi-mode CB rig on 28MHz.

On 14MHz I found that the IsoLoop tuned up very easily, once I had got used to the remote-tuning control. Tuning across the band I quickly 'got the hang' of the loop tuning by listening for the signal peaks as the stepper-motor slowly turned the variable capacitor and resonated the antenna.

I was unprepared for the very noticeable 'peak' obtained as the loop tuning control was in use. Until the antenna is 'peaked' at the operating frequency it appears to be very 'dead'.

To help the operator obtain the best results, the stepper motor speed can be adjusted and I found this facility most useful. The very low background noise level is very deceiving and the remote tuning facility proved to be very sensitive. It just goes to show how much we've become used to the various forms of 'hash' and interference heard on the h.f. bands!

Although the IsoLoop is rated for a maximum of 150W I found that even when driving my KW2000B to 75W on c.w. I obtained consistently



REPAIRS AND SERVICING OF AMATEUR PMR. RADIO COMMUNICATION EQUIPMENT

- ★ Experienced Technical Staff.
- ★ All Major Manufacturers. e.g. Yaesu. Kenwood. Icom. etc.
- ★ Suppliers of PMR and Amateur Radio Equipment (to your requirements).
- ★ Guaranteed 7 day turnround. (Subject to availability of Spares).
- ★ Trade Service Enquiries Welcome.
- ★ Very Competitive rates for both Private and Trade.
- ★ Carriage arranged.

Castle Electronics

Unit 2. Building 21.
Pensnett Trading Est.
Kingswinford.
West Midlands. DY6 7PP.
Telephone: (0384) 298616.
270224.



SEE US AT
LEICESTER

R. N. Electronics

Professionally Designed
Equipment for Amateurs
**TRANSVERTERS
FOR 6m & 4m**

All transverters individually tested to meet this high specification

SECOND HARMONIC: < -70dB INTERMOD: < -32dB
SPURII: < -60dB NOISE FIGURE: < 2.5dB
Drive levels: 2m I.F. 0.5-3W or 10W using 7dB switched Attenuator
10m I.F. 10mW-100mW or 100mW-1W or 1W-10W

● 144/50MHz	25W p.e.p.	£199 + £4 p&p
● 145/70MHz	25W p.e.p.	£249 + £4 p&p
● 145/70MHz	10W p.e.p.	£199 + £4 p&p
● 28/50MHz	25W p.e.p.	£209 + £4 p&p
● 28/70MHz	10W p.e.p.	£209 + £4 p&p

MASTHEAD PRE-AMPLIFIERS

Low noise GaAs FET design. SPECIFICATION: Gain 12dB. Noise figure: TYP .8dB 200W POWER HANDLING for 50MHz, 70MHz, 144MHz, 432MHz, 934MHz. £109 + £4 p&p.
100W POWER HANDLING for 2m, 4m, 6m. £75 + £4 p&p.

INDOOR PRE AMPLIFIERS

100W power handling (50W) RF sensing for 2m, 4m, 6m. £38 + £2 p&p

POWER AMPLIFIERS

50-52MHz 25W p.e.p. output 0.5W-3W drive including low pass filter ideal for FT690 £75 + £4 p&p

MET ANTENNAS

50MHz 3 el. £42.95, 5 el. £64.40, 70MHz 3 el. £37.30 p&p £4.50

PROFESSIONAL SERVICES IN RF DESIGN AND EMC TESTING

1 Arnolds Court, Arnolds Farm Lane,
Mountnessing, Essex CM13 1UT
Tel: 0277 352219 Fax: 0277 352968



All prices include VAT



DATING
ELECTRONICS LIMITED

Clayton Wood Close
West Park
Leeds LS16 6QE
Tel: 0532 744822
Fax: 0532 742872

For products you can rely upon to give amazing results

For information on **Active Antennas, RF Amplifiers, Converters, Audio Filters, the Morse Tutor and Speech Processors** send or telephone for a free catalogue and selective data sheets as required.

All our products are designed and made in Britain.

Orders can be despatched within 48 hours subject to availability.



— VISA AND ACCESS WELCOME —



MAKE YOUR INTERESTS PAY!

Over the past 100 years more than 9 million students throughout the world have found it worth their while! An ICS home-study course can help you get a better job, make more money and have more fun out of life! ICS has over 90 years experience in home-study courses and is the largest correspondence school in the world. You learn at your own pace, when and where you want under the guidance of expert 'personal' tutors. Find out how we can help YOU. Post or phone today for your **FREE INFORMATION PACK** on the course of your choice. (Tick one box only)

Electronics	<input type="checkbox"/>	TV, Video & Hi-Fi Servicing	<input type="checkbox"/>
Basic Electronic Engineering (City & Guilds)	<input type="checkbox"/>	Refrigeration & Air Conditioning	<input type="checkbox"/>
Electrical Engineering	<input type="checkbox"/>	Car Mechanics	<input type="checkbox"/>
Electrical Contracting/Installation	<input type="checkbox"/>	Computer Programming	<input type="checkbox"/>
GCSE / GCE / SCE over 40 examination subjects to choose from <input type="checkbox"/>			

Name

Address



International Correspondence Schools, Dept. EESB0 312/314 High Street, Sutton, Surrey SM1 1PR
Telephone 081-643 9568 or 041-221 2926 (24 hours)

NEW! 40M QRP TX/RX KIT



COMPLETE TO THE LAST NUT!

- ★ 2W CW OUTPUT
- ★ 7.0-7.1MHz
- ★ STABLE VFO
- ★ SIDETONE
- ★ RIT
- ★ AUDIO FILTER

SEE US AT LEICESTER. STAND 6A

★ CASE AND ALL HARDWARE INCLUDED ★

DTR7 — KIT £84.50 READY BUILT £135.00

Send SAE for Brochure or call Alan, G4DVW on 0602 382509

LAKE ELECTRONICS

7 MIDDLETON CLOSE, NUTHALL, NOTTINGHAM NG16 1BX
(callers by appointment only)



good reception reports. In the ten days or so I had the antenna in operation, propagation conditions on 14MHz led to many 'short' skip and DX QSOs.

Splatter Attenuated

'Splatter' from poorly set-up and badly operated s.s.b. transmitters has been a problem on 14MHz for many years. I've no doubt that many readers have tuned a long way up or down the band to locate the source of this annoying (and unnecessary) interference. The high Q of the series radiating LC combination of the antenna helps to overcome this nuisance. Any transmission more than 15kHz above or below your operating frequency will be drastically attenuated.

The best DX I worked on 14MHz was into Soviet Central Asia, into South America and the Pacific. There was much interest shown by stations in the USA when they heard what antenna was being used.

There were only a few occasions when my received transmissions were awarded less than S9. Mostly, I was able to give similar reports but it was interesting to note that almost invariably the other station was using much higher power than me!

As I didn't have access to a rotator all my tests were with the antenna mounted horizontally, utilising the omni-directional characteristics of the IsoLoop. The antenna can also be used mounted in a vertical plane. When mounted in this fashion the directional properties can be used to null out interference and allow the operator to use the main lobe from the antenna to best effect.

Ten and Fifteen

On 21MHz I worked down into Asia and could hear many JAs. I didn't work any Japanese stations though, because of the 'pile-ups' that ensued and I was competing against kilowatts into beam antennas.

It seems that every American station wants to work JA! Despite not being able to work into JA, I was most impressed with the antenna's ability to effectively reduce background noise and allow the relatively weak DX stations to be heard.

On 28MHz (undoubtedly my favourite band nowadays) the antenna came into its own. I worked a great deal of DX with the KW2000B and found that the antenna would still give me S9 reports from Californian and other west coast USA stations - even when it was mounted just one metre above the ground.

I then decided to 'have a go' with my newly-converted multi-mode CB transceiver on 28MHz. This rig can just about manage 15W p.e.p. and using the IsoLoop I was soon in QSO with a Hawian station.

Much to my surprise and pleasure I also heard and worked several a.m. stations operating from the American mid-west. Propagation conditions on 28MHz at the time enabled me to hear both sides of UK - USA QSOs and I discovered that the high Q filter effect of the antenna - greatly reduced 'hash' interference from my word-processor, which I placed close-by for an 'acid test' knowing it would make an ideal source of 'hash'.

British Climate

Although I was most impressed with the results from the IsoLoop, I had one or two reservations regarding the control and the electrical hardware of

the antenna. I was also particularly concerned that the externally mounted DIN type plug and socket used for the remote control facility, would cause problems when exposed to the vagaries of the British climate.

I contacted ICS Electronics who supply the antenna to discuss the various points. I discovered that the newly-imported models come complete with ready-made-up control cables. They also informed me that the manufacturers are considering mounting the DIN socket inside the flat, box-like, plastics housing containing the stepper motor and variable capacitor.

The other points discussed with the importers, concerned the remote tuning switch operating the stepper motor. I suggested that as the operator would be using the tuning control a great deal, that for comfortable operation, the centrally 'biased off' toggle switch for the stepper-tuning be replaced by a Morse-keyer type paddle.

Added to their on-going developments in the weather-proofing areas mentioned, the manufacturers are also working on a model to cover 7MHz which I am in no doubt will prove to be popular with the keen 'forty' operator.

One big advantage for the radio amateur with planning and space problems, is that the IsoLoop doesn't look anything like the usual antenna and it could be used in situations where antenna erection could otherwise be difficult!

Conclusions

Well, I'm convinced that the IsoLoop antenna is a viable alternative for anyone who cannot erect a full size dipole or multi-band vertical. I tried the antenna inside our house and it still worked very well, particularly on 28MHz QRP operation.

For the amateur or s.w.l. living in an apartment or a flat with no chance of an outside antenna - it could be an ideal solution for the h.f. bands above 14MHz. Boat and caravan operation is also easy, especially as the remote control unit is 12V d.c. powered.

Owners of high-sided, coach-built motor-caravans who want to work mobile, could solve their often difficult problem of where to place the antenna by using an IsoLoop. The antenna could be mounted just above a roof-rack.

To sum up, I must admit that the IsoLoop's performance took me by surprise. I enjoyed using it and await the arrival of the 7MHz version with interest. The antenna is available for £299.95 including VAT from ICS Electronics Ltd., Unit V, Rudford Industrial Estate, Ford, Arundel, West Sussex, who kindly loaned me the review antenna.

PW

Specifications

Frequency Coverage:	14 to 30MHz
Nominal Impedance:	50Ω
Power Rating:	150W
VSWR:	Less than 1.4:1 (no nearby objects)
Temperature Range:	0° to 50°C (operating*), -50° to 60°C (storage).
Dimensions:	900 x 900 x 90mm (maximum)
Maximum Mast Outside Diameter:	32mm
Weight:	5.44 kg
Coaxial Connector:	u.h.f. type SO-2399
Gain:	Approximately that of a dipole

* Because the IsoLoop is such an extremely high- Q antenna, its performance will be degraded by accumulations of snow. Also, freezing weather preceded by heavy moisture may result in temporary failure of the remote tuning mechanism.

REVIEW

Lower Frequencies in Smaller Gardens – PART 1

Don't give into your small garden is the message from Paul Essery GW3KFE. Paul aims to encourage anyone in a situation where it seems h.f. operations would be hopeless, with some practical ideas.

Since I retired, I've lived in a small house with a garden some 8 x 6m at the back and 5 x 6m out at the front, in a valley with hills rising to 330m or higher in every direction but for a small gap to the north-east.

The front of the house faces north-west. It didn't seem too promising for operation on any band. However, the presence of GB3PW some 6km to the SW at a height of some 560m a.s.l. was enough to at least put me in contact with the locals.

To cover 14, 21 and 28MHz I initially used an indoor beam in the loft, then a vertical followed by a two-element outdoor tri-band beam at approximately 8m above the ground.

By careful siting, it was found possible to arrange that when 'parked' and out-of-use none of the beam elements extended beyond the confines of the plot. However, when working DX it would usually overhang the adjoining gardens.

Gripping Authority

When the authorities griped about the beam, I replied that when they removed all the illegal CB antennas, I'd be pleased to take my beam down and backed it up by commenting that the beam was a 'temporary' one anyway, moved more often than at 90-day intervals. The authorities didn't respond, CB antennas are still there, so the beam is still up!

By the ploy of advising everyone that I was very active and then staying in s.w.l. mode for several months, and - above all - having a TVI-proof TV set actually sitting next to the linear as part of the station, I was eventually 'up and running' on four bands namely 144, 28, 21 and 14MHz. Later I added 432MHz. In that time I had one TVI complainant and that was soon cured.

Mountainous Problems

That left me with a problem, namely the lower bands, 1.8, 3.5 and 7MHz. Some experimentation seemed to be called for. First, because of the mountains and the fact that even the locals on the Sunday morning net suffered marked fading, it was fairly evident all communication, even in daylight, on 3.5 and 1.8MHz was based essentially on sky waves.

Secondly it was noted that my house was wired up in accordance with the questionable PME (Protective Multiple Earthing) technique, and whatever I did would allow for this problem.

Thirdly, the underlying rock structure wasn't exactly encouraging. Fourthly, I got hold of some wire. The stage was now set for a series of 'suck it and see' experiments.

Earthing Precautions

My first test was to use the available mains earth, but taking some precautions. These were very simply, to ensure the station was always switched off by removal and physical separation of the power plug at the mains socket.

Up 'aloft' I had a half-wave of thin (28s.w.g.) wire which left the a.t.u., went out and up to the eaves (say 5m) from whence it sloped down the

garden to the back fence which it reached at about eye-level.

The wire now continued at this level around three sides of the garden, ending up quite close to where it started! By using a half-wave of wire I hoped to keep the current in the earth down to a lower level.

The low height of the current portion, would I thought, cause most of the r.f. to go up and hence out of the valley. I then stuck with this configuration until I had a 'feel' for how it behaved. The feed was by way of my home-brew a.t.u., so that at least the transmitter would 'see' the 50Ω it yearned for.

Thicker Wire

Around this time I had painters and builders around, so since they couldn't see the thin wire before the ladder had hit it, I had a renewal job to do. This time the wire - a bit thicker stuff - went up as before, then across the back of the house until it turned down the garden at which point it was about 3m high.

The wire now went down the garden, reaching the fence at approximately 2m above the ground as before, where it turned and ran about half-way across to end in an insulator. Clearly the new configuration wasn't much better and worse, it was going to look like a much lower impedance at the feedpoint.

Radio Motto

As always though, 'suck it and see' is the radio amateur's motto. Practically, the thing seemed to be performing more or less unchanged, no improvement for sure, but not noticeably worse either.

Stage three came next, when a reel of tinned copper wire of about 24s.w.g. was acquired in a 'junk sale', (the local 'wags' claimed it was to repair my car!). Each side of my garden is defined by a wire-link fence, with horizontal and vertical strands of about 12 gauge galvanised wire at 150mm intervals. This fence is held vertical by steel angle posts sunk well in the ground to act as guy anchors. The end of the plot is closed by a timber fence.

From the earth terminal I ran a length of the tinned copper wire out of the house, spiralled it round the topmost strand of the fence at a rate of about one turn every 150mm or so. I then ran the wire across the end of the garden, returning it towards the house again. It was finally wrapped round the top strand of fencing on the other side.

Measured Improvement

Where it went past the back gate, the wire was dropped right to the floor, clamped to the gatepost with drawing pins, and on the other side, back up to about 150mm above ground level. Nothing was soldered, nothing else was altered and in fact the wire ran where circumstances dictated.

This extra 'earthing' alone had given me around a 10dB measured improvement. I might add that it tends to confirm my belief that at these low frequencies, radial wires above ground are more effective than they would be when buried.

Mainly Low Angles

Now, it is stated in most of the textbooks that a ground-mounted quarter-wave Marconi-type antenna will radiate mainly at low angles. 'Tain't necessarily so!' There are in fact two functions associated with the earth side of such a Marconi antenna.

The first is, that of getting the return currents back to the feedpoint. This task is nicely covered by using many radials, since the earth return currents are highest under the antenna.

However, the second requirement really involves being able to maintain a decent earth plane out to many wavelengths from the (vertical) antenna. Anyone who has used a vertical on the seashore or from a lighthouse will know what happens, the level of the DX from out to sea is quite frightening!

One light-keeper, GW3VVZ for example, in his time at Nash Point lighthouse would hear Ws on 1.8MHz from twilight onwards. So, in sum then, the ground radials, whether above or below the ground, serve merely to reduce the losses in soil heating. It is the quality of the ground out to approximately 100 wavelengths or more from the antenna, that determines whether or not the low angle radiation observable over sea will be attainable at the chosen site.

Mirror Simulation

For an experimental demonstration of this, try a small scrap of mirror and pin (the pin simulates the vertical antenna, with the pin's mirror reflection simulating the vertical's ground image). As you get your eye near the horizontal, you'll lose sight of most of the pin's image in the mirror.

Repeat this test on a much larger mirror and you can get right to horizontal before you lose sight of the image. Remove the mirror altogether and sit the pin over a piece of cloth, and you'll lose sight of the image.

The mirror 'image' equates to the vertical's image in the ground, without which it wouldn't work. Adding wire in the ground equates to silvering the mirror at the frequencies I'm using.


High Hills

However, back to practice! I've already mentioned that this QTH is surrounded by high hills. My house is approximately 100m a.s.l. and the hills are all over the 300m mark, save for a very narrow gap around NE - a singularly useless direction!

So, it was reasoned that I had to accept the need to radiate my best signal upwards to at least some degree to get over the hills. Measurement indicated that 2.5° to as much as 7.5° was needed to clear the hills. Since most of the radiation would be at higher angles, there really didn't seem to be too much risk of much r.f. colliding with the hills!

So, after all the experimentation, matters rested for several months and I was encouraged by the results. But I improved the ground system, by adding extra wire radials, both above and just under the ground.

Each extra radial added to the effectiveness of the system. Certainly I hadn't got a DX-inhaler, but even to be called by an OZ9 one Sunday noon on 3.5MHz was more than I had expected.

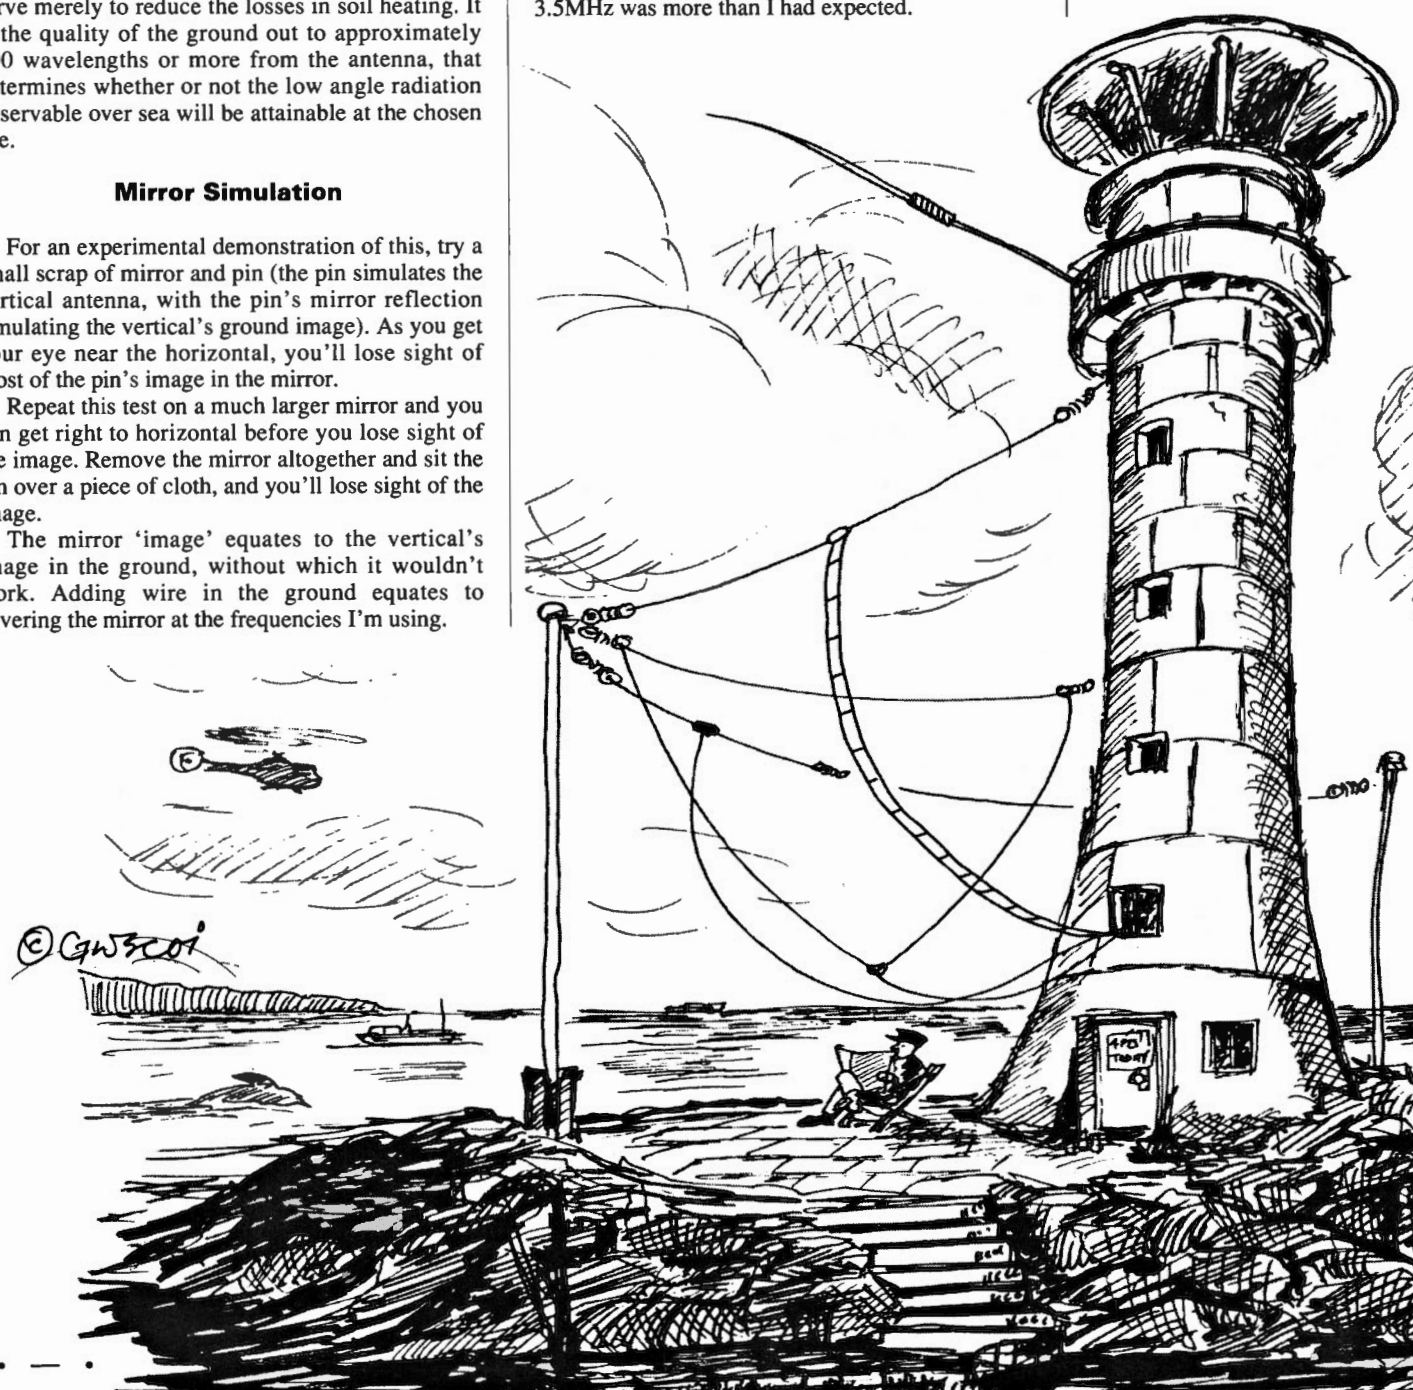

Invisible Antenna

What was more important, the system was now almost invisible. With a bit of fiddling the a.t.u. could be persuaded to load the 'thing' on 1.8MHz and 7MHz - although that achievement was a credit mark for the a.t.u. rather than the antenna!

What next? The roof of the house was about 8m high. How about taking the wire almost up to the roof-top, then leading the surplus back down as inconspicuously as possible? Inevitably there would be some cancellation in some directions, but would it matter? The only way to find out was to try it.

String Over The Roof!

Basically speaking there are several techniques available to get over a roof. You could use a strong and trusty right arm plus a child's ball, a bow and arrow, a radio-controlled model helicopter or even climb up. All these methods are possible, whether they will succeed is another matter altogether!

It has to be admitted that my throwing powers aren't what they used to be - due to the onset of 'old age'! Instead, my friendly neighbour Steve decided to have a go.

Under the watchful eyes of the children who'd loaned us their favourite ball, we started the job. At the first attempt the ball soared up to the roof-top, was caught by the prevailing wind and blew along the ridge. The string then snagged on a slate. A quick yank from below and - you've guessed it - the string broke. Break off operations, jump in car, go purchase the youngsters a new ball!

Next, with the help of a long ladder and a couple of bamboo canes, GW0JAI at the top and me at the bottom footing the ladder, we recovered the ball. Progress - I had at least got back to the starting line!

We soon perfected the technique and it wasn't all that difficult. The only snag was that although this time the ball went over OK, the wind took it into the next-door garden - fortunately they were away and I had no trouble completing my 'vertical'!

Measurements

As Shakespeare would have expressed it - to load, or not to load, that is the question. The first tests were to establish some sort of relationship with what had previously happened.

Make no mistake, the keeping of a 'lab notebook' and writing up each and every test carried out is absolutely invaluable when playing with antennas. Because 'conditions' change continually, you need more accurate 'controls' on any experiment.

To that end, I record - and I have done so for thirty-odd years - the exact configuration of the antenna, TX and a.t.u. settings and field-strength meter readings taken at various carefully defined positions. The field-strength meter itself is checked and calibrated to produce a specified reading on the meter for a specified input drive.

With care and precautions such as these, I can reproduce fairly accurately, a configuration that was taken down years ago. It's not possible for me to measure the system 'gain' - but neither can most professionals to judge by the claims one sees in the ads! . . .

To be continued.

In Part 2 Paul looks at Calibration, Testing, Results, Radials and Loading.

QUALITAS RADIO

High performance VHF/UHF
GaAsFET preamplifiers by
Landwehr Electronic of Germany

- ★ Professionally manufactured and individually calibrated 2m and 70cm preamplifiers
- ★ Very low noise figure, ideal for satellite communications
- ★ Very low insertion loss ★ Very high stability
- ★ Superb large signal handling
- ★ Maximum transfer power with ptt operation; 750 watts
- ★ Maximum switchable power in vox operation; 150 watts
- ★ In weatherproof aluminium diecast box for masthead use
- ★ High quality N sockets
- ★ Supplied with mast clamps
- ★ Separate connector for dc supply and ptt control

MODEL NO	FREQ RANGE	NOISE FIGURE	GAIN (dB)	IP3 (dBm)	PRICE (inc. VAT)
145MA	144-146	<0.8dB	17-20	-3	£119.00
145MAS	144-146	<0.5dB	17-20	-3	£137.00
435MA	430-440	<1.1dB	16-19	-3	£142.00

WRITE OR CALL FOR FREE DATA SHEET AND LIST OF ACCESSORIES.

Above prices include VAT, but add £3.00 for post and packing. Make cheques payable to QUALITAS RADIO. VISA and ACCESS accepted.

Landwehr Electronic preamps are available exclusively through QUALITAS RADIO, 23 Dark Lane, Hollywood, Birmingham, B47 5BS. Tel: 021 430 7267.

We are UK importers of world famous DL6WU double optimised yagi antennas.

Send for details

flexaYagi®

QUALITAS RADIO

RST

RST MAIL ORDER CO.
LANGREX SUPPLIES LTD,
1 MAYO ROAD,
CROYDON,
SURREY CR0 2QP.
SPECIAL EXPRESS
MAIL ORDER SERVICE

AZ31	£ p	EM87	2.50	PY82	1.50	6AS6	4.00	6SA7	3.00
CL33	4.00	EN91	7.50	PY83	1.25	6AS7G	8.75	6SC7	2.75
DY86/7	1.50	EY51	2.75	PY88	2.00	6A16	1.25	6SG7M	2.50
DY892	1.50	EY88	1.75	PY50QA	1.00	6AUSGT	5.00	6SJ7	3.25
E88CC	6.85	EY88	1.75	PY800	1.50	6AUS	3.50	6SK7	3.50
E180F	4.50	EY500A	3.00	PY801	1.50	6AUSA	3.75	6SL7GT	3.00
E180F	25.00	E280	1.80	OV02-6	18.50	6B7	3.25	6SN7GT	3.00
E180F	1.25	E281	1.50	OV03-10	5.00	6B8	3.25	6SS7	2.75
E180F	1.50	EY501	3.00	OV03-12	6.00	6B4S	1.50	6A8A	2.25
E180F	1.50	G232	4.00	OV03-10 Mull	15.00	6B7A	5.00	6V6GT	4.25
E180F	1.50	G233	4.75	OV03-20A	25.00	6BE6	1.50	6X4	3.00
E180F	1.50	G234 MullGE	7.50	OV06-40A	27.50	6BH6	2.50	6X5GT	1.75
E180F	1.50	G237	4.75	OV06-40A	38.50	6B18	2.25	6Z17	2.25
E180F	1.50	KT61	7.50	R18	3.00	6BN6	2.00	12AX7A GE	7.00
E180F	1.75	KT68	15.00	R19	7.50	6BQ7A	3.50	12B6A	2.50
E180F	1.75	KT68 GEC	30.00	SP41	6.00	6BR7	6.00	12B6B	2.50
E180F	2.25	KT77 Gold Lion	15.00	SP61	4.00	6BR8A	3.50	12B7A GE	6.00
E180F	3.50	KT88	15.00	U19	9.50	6BS7	6.00	12B7A GE	7.00
E180F	3.50	N78	10.00	U25	2.50	6BW6	6.00	12E1	17.00
E180F	4.50	OA2	3.25	U26	2.50	6BW7	1.50	12HG7 12GN7	7.00
E180F	1.50	OB2	4.35	U37	9.00	6BZ6	2.75	30FL1/2	1.35
E180F	3.00	OC3	3.50	UAB20	1.25	6C4	1.25	30P4	2.50
E180F	3.00	OC3	2.50	UBF89	1.50	6C5	3.50	30F19	2.50
E180F	3.00	PC86	2.50	UCH42	4.00	6C8BA	2.50	30P13	1.80
E180F	1.50	PC88	2.50	UCH81	2.50	6C8DGA	5.00	30P14	1.80
E180F	1.50	PC82	1.75	UCL82	1.75	6CL5	3.75	5725	70.00
E180F	3.00	PC87	1.75	UCL83	2.75	6CQ7 GE	5.25	6008	45.00
E180F	1.75	PC800	1.70	UF89	2.00	6CH6	6.95	607	3.75
E180F	8.00	PCF80	2.00	UL41	10.00	6CW4	5.00	611A	18.50
E180F	2.75	PCF82	1.80	UL84	1.75	6D6	3.50	612A	52.50
E180F	3.50	PCF88	2.50	U141	4.00	6D6S GE	12.00	613	27.50
E180F	4.50	PCF801	2.50	UY85	2.25	6DQ8B	4.75	6417 GE	11.50
E180F	2.50	PCF802	2.50	VR105/30	2.50	6E4S	3.00	6B6A	35.00
E180F	5.00	PCF805	1.70	VR150/30	2.50	6E4S	1.85	672A	20.00
E180F	5.00	PCF808	1.70	Z759	25.00	6F8	3.00	691A	18.50
E180F	5.00	PCF809	3.00	Z803U	25.00	6GK6	3.50	6050A GE	8.95
E180F	5.00	PC182	2.00	2D21	3.25	6H6	3.00	5763	10.00
E180F	2.95	PC183	3.00	3B2B	15.00	6HS6	4.95	5814A	4.00
E180F	3.95	PC184	2.00	4CX250B	65.00	6J5	4.50	5842	10.00
E180F	2.00	PC185	2.50	5A6G	5.50	6J5	2.00	6000	8.00
E180F	2.00	PC186	2.50	5U4G	4.50	6J5A GE	9.50	6146B GE	15.00
E180F	2.50	PD500	8.00	5V4G	2.50	6J5C	8.50	6883B GE	15.95
E180F	2.50	PL200	2.50	5Y8GT	3.50	6J5GT	11.25	6973	6.75
E180F	10.00	PL36	3.50	5Z3	4.00	6K6GT	2.75	7025 GE	7.00
E180F	1.70	PL81	1.70	5Z4GT	2.50	6K7	3.00	7027A GE	12.50
E180F	1.50	PL82	1.50	6Z0L2	1.75	6K8	3.00	7581A GE	11.95
E180F	25.00	PL83	2.50	6A87	3.00	6K9	11.95	7585	15.00
E180F	5.25	PL84	2.00	6AH6	5.00	6L6S	7.50	7587	23.00
E180F	2.25	PL504	2.50	6AK5	1.50	6L6CSYL	9.00	7988	6.50
E180F	2.75	PL508	5.50	6AL5	1.50	6L6C GE	4.50	6008 GE	18.50
E180F	4.00	PL509	6.00	6AN5	2.95	6L6C GE	9.50	6417 GE	11.50
E180F	18.50	PL519	6.00	6AN5A	4.50	6L7	2.50		
E180F	18.50	PL602	5.00	6AN6A	4.50	6L8	2.50		
E180F	6.50	PY33	2.50	6AQ5	3.25	6Q7	3.75		
E180F	2.50	PY81	1.50	6ARS	25.00	6R4H/6R4K6	10.00		

Tel. 081-684 1166



Price excluding VAT add 15%

Open daily to callers: Mon-Fri 9am-4pm - Closed Saturday. Valves, Tubes and Transistors. Over 6000 types available from stock.

Terms C.W.O. and Visa Cards accepted. Orders despatched by return.

Quotations for any types not listed S.A.E. Post and packing £1.00 per order + VAT

Fax: 081-684 3056

Telex: 946708

KW COMMUNICATIONS LTD

CHATHAM ROAD, SANDLING, MAIDSTONE ME14 3AY

Tel: 0622-692773 Fax: 0622-764614 Tlx: 965834

SCANNERS & RECEIVERS

Item	Description	Price incl. VAT	P/P
AF900K	6 band hand held scanning RX	£235.00	
AF1000	Scanning RX 8-1300MHz	£249.00	
MVT500	Scanner RX 25-1300MHz hand held	£275.00	
MVT6000	Scanner RX 25-13-MHz Base/Mobile	£345.00	
R100	Wideband RX	£499.00	
R700	Wideband RX	£999.00	
FRG9600(M)	60-950MHz	£499.00	
R535	Airband VHF & UHF	£249.00	
WIN108	Handheld Airband 108-136MHz	£175.00	
R2000	General Coverage HF Receiver	£595.00	
R5000	General Coverage HF Receiver	£875.00	
HF225	General Coverage HF Receiver	£425.00	
R 1	Hand portable Receiver	£399.00	
R 71	General Coverage HF Receiver	£855.00	
FRG 8800	General Coverage HF Receiver	£849.00	

BUTTERNUTT (U.S.A.)

Item	Description	Price incl. VAT	P/P
HF6VX	6 Band Vertical	£179.99	
HF2V	80/40m Vertical	£142.00	
A1824	18 & 24MHz Add on Kit	£36.85	
STR 11	HF6V Radial Kit	£33.50	
MPS	Mounting Post HF6 & HF2	£8.00	
20MRK	HF2V 20m Add on Kit	£33.50	
30MRK	HF2V 30m Add on Kit	£33.50	
TBR160S	160m Add on Kit for HF6 & HF2	£84.48	
2MCV	3dB 2m Colinear	£53.99	
2MCVS	5dB 2m Colinear	£83.99	
HF5B	5 Band Mini Beam	£234.15	

CUSHCRAFT (U.S.A.)

Item	Description	Price incl. VAT	P/P
124WB	Cushcraft 124WB VHF Beam Anten	£37.08	
153CD	Cushcraft 15-3CD 3E1 25m Beam	£140.06	
154CD	Cushcraft 15-4CD 4E1 15m Beam	£148.29	
203CD	Cushcraft 20-3CD 3E1 20m Beam	£238.91	
204CD	Cushcraft 20-4CD 4E1 20m Beam	£328.70	
215WB	Cushcraft 15E1 2m Yagi Antenna	£99.88	
4218XL	18 Element 2m Boomer	£121.80	
A3SS	Cushcraft 3 Ele Tribander SS	£324.02	
A4S	Cushcraft 4 Ele Beam Antenna	£391.95	
A50-6	Cushcraft 6m 6 Ele Beam Antenna	£182.51	
AP8	8 Band Vertical	£184.78	
ARK2B	Cushcraft VHF Vertical Antenna	£45.59	
ARK450B	Cushcraft VHF Beam	£42.64	
AV3	Cushcraft AV3 Trapped Vert Ant	£75.00	
AV5	Cushcraft AV5 Trapped Vert Ant	£151.80	
DW3	Cushcraft 10, 15 & 20m Dipole	£138.67	
D3W	Cushcraft 10, 12 & 17m Dipole	£138.67	
LAC1	Cushcraft Lightning Arrestor	£8.58	
LAC2	Cushcraft Lightning Arrestor	£22.78	
LAC4H	R4 to R5 Conversion Kit	£35.01	
R45K	Cushcraft 1/2 Wave Vert 10-20m	£259.01	
R5	3 Element Monobander	£115.03	
TEN3			

MFJ (U.S.A.)

Item	Description	Price incl. VAT	P/P
MFJ1274	Packet Radio Terminal	£204.25	
MFJ1278	Multi Mode Data Controller	£228.49	
MFJ1701	6-way Antenna Switch	£39.30	
MFJ1704	4 Position Ant Switch	£86.41	
MFJ202B	RF Noise Bridge	£63.20	
MFJ204B	Antenna Noise Bridge	£84.31	
MFJ260	300W Dummy Load	£32.57	
MFJ401B	Econo Keyer Kit	£59.21	
MFJ407B	Electronic Keyer	£78.73	
MFJ422B	Electronic Morse Key Bench	£146.25	
MFJ422BX	Electronic Morse Keyer W/O Bench	£76.48	
MFJ484C	Cushcraft Memory Keyer	£162.32	
MFJ722	CW/SSB Filter	£78.46	
MFJ723	CW Filter	£48.54	
MFJ752C	Tunable Filter	£104.42	
MFJ815	SWR Meter 2kW	£78.74	
MFJ840	2m Wattmeter	£21.02	
MFJ841	2m In-line Wattmeter	£42.14	
MFJ901B	200 Watt ATU	£70.05	
MFJ931	Artificial Ground	£86.61	
MFJ941D	300 Watt Basic Tuner	£105.40	
MFJ945C	Versa Tuner 11 Mobile	£97.37	
MFJ949D	De Luxe 300W ATU	£168.82	
MFJ962B/C	1.5kW ATU	£258.84	
MFJ986	1.5kW Roller Inductor Tuner	£279.62	

LOADS & SWITCHES

Item	Description	Price incl. VAT	P/P
T35	Toyo 30W 1-500MHz Dummy Load	£10.20	
T100	Toyo 100W 1-500MHz Dummy Load	£45.00	
T200	Toyo 200W 1-500MHz Dummy Load	£84.00	
DL1	Texpro 1.5kW 160-10M Dummy Load	£75.00	
KS 2	Koyo Coaxial switch 2 way 1.0kW	£28.89	
S20N	Koyo Coaxial Switch 2 way 1.0kW 1-1000MHz N	£32.66	
SA 450M	Toyo Coaxial Switch 2 way 2.5kW 1-1500MHz SO239	£18.50	
SA 450N	Toyo Coaxial Switch 2 way 2.5kW 1-1500MHz N	£26.00	
DRAE UHF	UHF 3 position Antenna Switch 'N'	£24.15	
DRAE VHF	VHF 3 position Antenna Switch 'SO239'	£18.69	

VSWR/POWER METERS

Item	Description	Price incl. VAT	P/P
W160	Koyo 15/60W 2m In-Line VSWR	£32.91	
W544	Koyo 7/40/40W 140-460MHz	£107.00	
W560M	Koyo 3/20/200 1.8-520MHz	£99.90	
W570	Koyo 5/20/200 1.8-1300MHz	£124.75	
K 20	Koyo 15/50W 2m	£24.60	
K 100	Koyo 2KW 1.8-60MHz	£79.96	
K 200	Koyo 200W 1.8-60MHz	£81.55	
K 400	Koyo 200W 140-525MHz	£63.65	
YM 1E	Toyo 120W 3.5-1500MHz	£32.00	
T 435	Toyo 200W 2m & 70cm VSWR/Wattmeter	£87.77	

WIDE BAND ANTENNAS

Item	Description	Price incl. VAT	P/P
AH 7000	Discone 25-1300MHz	£82.50	
YADC 2	Discone 14-1300MHz	£79.00	
DSC 8	Discone 1XRX 70-680MHz	£28.50	
SC3000	Discone 300-512MHz	£63.99	

ICOM

Item	Description	Price incl. VAT	P/P
IC-751A	HF All Band, General Coverage Rx 12V	£1500.00	
IC-735	HF All Band, General Coverage Rx 12V	£979.00	
IC-726	HF All Band, General Coverage Rx + 5m	£989.00	
IC-725	HF All Band, General Coverage Rx 12V	£759.00	
IC-505	6M Transceiver, SSB/CW 12V	£529.00	
IC-2SE	2M FM Handportable with Nicad/charger	£275.00	
IC-2SET	2M FM Handportable Keypad entry DTMF	£295.00	
IC-2GE	2M FM Handportable with Nicad/charger	£265.00	
IC-228E	2M FM Mobile 25W 20 Memo 12V	£365.00	
IC-228H	2M FM Mobile 45W 20 Memo 12V	£385.00	
IC-290D	2M SSB/FM/CW 25W 5 Memo 12V	£559.00	
IC-275H	2M Transceiver SSB/FM/CW 100W 12V	£1,039.00	
IC-4SE	70CM FM Handportable inc Nicad/charger	£310.00	
IC-4SET	70CM FM Handportable Keypad entry DTMF	£310.00	
IC-4GE	70CM FM Handportable inc Nicad/charger	£299.00	
IC-R1000	Wideband Receiver	£499.00	
IC-AT150	Automatic Antenna Tuner 100W	£329.00	
IC-AT500	Automatic Antenna Tuner 500W	£529.00	

KENWOOD

Item	Description	Price incl. VAT	P/P
TS950SD	NEW Transceiver	£3,199.00	
TS940S	9 Band TX General Cover Rx	£1,995.00	
A1940	Auto/ATU	£244.88	
HF 9 Band Gen. Cov. TX/RX		£215.00	
HF 6m TX Gen. Cov. Rx		£985.00	
TS440	9 Band TX General Cov. Rx	£1,136.81	
PS50	H/Duty PSU	£222.49	
AT230	All Band ATU/Power Meter	£208.67	
TH25	NEW 2m H/Held	£238.00	
TH45	NEW 70cm H/Held	£269.00	
TH75	NEW 2m/70cm H/Held	£398.00	
TH205	2m H/H	£215.26	
TH215	2m H/H Keyboard	£252.13	
TR751	2m 25W M/M Mobile	£599.00	
TM701	NEW 2m/70cm FM Mobile	£499.00	
TM721	2m/70cm FM Mobile	£775.00	
TM231E	NEW 2m FM Mobile 50/10/5W	£289.00	
TM431E	NEW 70cm FM Mobile 35/10/5W	£319.00	

TEN TEC (U.S.A.)

Item	Description	Price incl. VAT	P/P
TT 562	Omni V HF Transceiver CW/SSB/FM 200 9 bands	£1,900.18	
TT 585	Paragon General Coverage HF Transceiver 200W	£1,839.00	
TT 961	Power Supply for Omni, Paragon	£215.00	
TT 282	6.3MHz 250Hz Filter	£60.00	
TT 285	6.3MHz 500Hz Filter	£60.00	
TT 288	6.3MHz 1800Hz Filter	£60.00	
TT 1140	Circuit Breaker	£16.00	
TT 217	9.0MHz 500Hz Filter	£60.00	
TT 218	9.0MHz 1800Hz Filter	£60.00	
TT 219	9.0MHz 250Hz Filter	£60.00	
TT 256	FM Transceiver Module for Omni & Paragon	£60.49	
TT 220	9.0MHz 2.4KHz Filter	£60.00	
TT 425E	Titan Linear 1.5kW 160-10m	£2,171.00	
TT 420	Hercules II 500W Solid State 160-10m	£839.00	
TT 9420	Hercules II Power Supply 100A 13.8V	£215.00	
TT 700C	Ten Tec Electret Hand Microphone	£32.00	
TT 705	Ten Tec Electret Desk Microphone	£65.00	
TT 238	Ten Tec ATU 2.0kW 'L' match 160m-10m	£361.69	
TT 254	Ten Tec ATU 200W 'T' match 160m-10m	£153.33	

YAESU

Item	Description	Price incl. VAT	P/P
FT1000	HP Transceiver	£2,995.00	
FT767	HF Transceiver	£1,599.00	
FT747GX	Budget HF Transceiver	£659.00	
FT757GX	Mk II HF Transceiver	£969.00	
FP700	20A P.S.U.	£219.00	
FC700	Manual ATU	£149.00	
FP757HD	Heavy Duty 2m P.S.U.	£258.75	
FT4700	New 2m/70cm Dual Band FM Mobile	£875.00	
FT290	Mk II Super 290 2m Multimode 2.5W	£429.00	
FT690	Mk II 6m Multimode 2.5W	£399.00	
FT411	New 2m H/H Keyboard	£225.00	
FT811	New 70cm H/H Keyboard	£239.00	
FT470	New 2m/70cm Dual Band H/H	£389.00	
FT23R	2m Mini H/H	£209.00	
FT73R	70cm Mini H/H	£229.00	
FN89	Nicad Battery Pack (237/3)	£34.50	
FN810	Nicad Battery Pack (237/3)	£34.50	
FT736	270cm 25W Base Station	£1,399.00	

ROTATORS

Item	Description	Price incl. VAT	P/P
AR40	Hy Gain for up to 3 sq. ft. wind load	£186.87	
CD4511	Hy Gain for up to 8.5 sq. ft. wind load	£299.99	
HA4M	Hy Gain for up to 15 sq. ft. wind load	£325.50	
T2X	Hy Gain for up to 20 sq. ft. wind load	£399.00	
2303	Sky King Light Duty Rotator	£39.89	
G400RC	Yaesu Round 360° metre	£169.00	
G600RC	Yaesu Round 360°	£219.00	
AR200XL	Offset lead unit, 3 wire rotary dial control	£49.99	
G250	Yaesu twist and switch control	£78.00	
KS050	Kenpro Stay Bearing	£18.95	
GC038	Yaesu Rotator lower mast clamp	£18.95	

If you don't see it please ask — we have over 1000 items in stock. We are located just off the Eastern side of the A229 between Junction 3, M2 and Junction 6, M20. Follow the signs to SANDLING.



Instant credit available
Mail/Telephone order by cheque or Credit Card
(E&OE)



OPEN TUES-SAT, 9.30-5.30
(CLOSED MONDAYS)

STOCK ITEMS USUALLY
DESPATCHED WITHIN 24 HRS.

DELIVERY/INSURANCE PRICES
MAINLAND ONLY

'RAD COMM' comes FREE!

'Radio Communication'

is internationally recognised as one of the world's leading journals for the radio amateur and short-wave listener. Published monthly by the Radio Society of Great Britain, it is circulated exclusively to members of the Society and carries wide ranging and authoritative articles, technical reviews and data essential to those seeking to keep themselves briefed on the most up to date developments in the hobby. Regular columns cater for HF, VHF/UHF, microwave, satellite, data transmission and ATV enthusiasts. Regular constructional articles are supported by a PCB service.



JOIN THE RSGB TODAY

Membership services include a QSL Bureau, advice on planning permission for aerials plus technical and EMC problems, specialised contests and much, much more!

FOR YOUR FREE 'RAD COMM'
and a membership pack, post the coupon today, or
CALL 0707 59015



PLEASE SEND YOUR PACK

NAME

CALL SIGN

ADDRESS

PW

To **RADIO SOCIETY OF GREAT BRITAIN**

Lambda House, Cranborne Road,
Potters Bar, Herts, EN6 3JE.



LOW COST SHACK COMPUTER!

ASSEMBLE YOUR OWN XT PC COMPUTER

for only

£349



V20 XT kit complete and ready for easy assembly by plug, socket and screw for the amazing price of only £349 inc VAT.

Monochrome monitors from £69 VGA colour from £388. MS-DOS extra £55 only available with computer. Built price only £15 extra. Please add carriage £15.

KIT SPECIFICATION

9 pin Hercules monitor socket.	Motherboard manual.
25 pin Centronics printer socket.	Front panel blanks to cover future space.
9 pin com 1 socket.	Complete case kit inc 2 switches, 3 leds, 3 drive fittings, screws, feet, clips, pillars, etc.
Future card slots.	High capacity 200 watt fan assisted psu 12 and 5 volts c/w, all connectors and leads fitted.
Highest quality 8 slot 12MHz V20 motherboard, c/w 640Kbyte Ram and Bios chips fitted.	Full spec 101/2 keyboard, metal base, mechanical keys, dust cover, spiral lead and plug.
Disk controller card, c/w ribbon leads to drives.	
Screws kit, ribbon cables.	
Future hard disk 20 to 360Mbytes.	
Initial 360Kbyte floppy disk.	

For more information or to order:

CALL 0703 261115

or return the coupon to

D-A-T-A-M-A-R-C-H L-I-M-I-T-E-D

1 Mayflower Close, Chandlers Ford Ind Estate, Chandlers Ford,
Nr Eastleigh, Hampshire SO5 3AR

XT PC KIT

Tick as required

- ☐ Please send more information
- ☐ Please supply kit. I enclose cheque for £364
(£349 + £15 carriage)
- ☐ Please charge to my credit card as follows:
Card..... No..... Exp date.....

Name:

Address:

Tel:



RCI

QRP CONTEST RESULTS

This month Neill Taylor G4HLX describes and presents the full PW QRP contest results

The 1990 PW QRP contest attracted entries from 115 groups and individuals - a significant increase over 1989. For the first time in the eight-year history of this event, the winner is an English station! The Mansfield Contest Group G0MCG/P, operating from Harboro Rocks in Derbyshire, become the contest's first non-Welsh champions.

In second place, leading the Welsh stations, is GW4VEQ/P, Tony and Tom Jones, as The Cymru Contest Group on their Anglesey site. At the same time they take the title as the leading station using a single antenna.

The leading Scottish station and winner of the Tennamast trophy, is again GM4CAA/P, the Civil Aviation Authority Radio Society (Prestwick), located on Lowther Hill in Strathclyde. Amongst the EI and GI entries, the leader is G10EJN/P, Fred Sweeney and Paul Knocker, who climbed Slieve Donardo, the highest point in Northern Ireland. Of the 43 single operator entries, which included some noble one-man back-packing stations scaling various mountains, the leader is Roger Dyke GW4NVA/P operating from a popular spot near Wrexham.

The summary results tables shown here give details of other leading stations - congratulations to all certificate winners. The results list of all 115 stations was published in 'Newsdesk' in the October issue of *PW* (page 19). Entrants who submitted an s.a.e. with their logs will shortly receive the full detailed results list. Anyone else requiring a copy should send an s.a.e. to the *PW* offices. The detailed results table will also be distributed via the packet radio network shortly after this issue is published - look for it on your local BBS by using the command L< G4HLX.

High Activity but Poor Conditions

Many entrants remarked on the increased activity in this year's event, but offset by the most mediocre of propagation conditions in the contest's eight-year history. "Conditions were very poor," says GM0ICF/P and "generally we found the band to be flat," at G8PGM. The remark by G6ARC/P: "nothing special in the way of DX to report," seems to have been an understatement - searching through



Peter G0JEW operates G7APD/P while Andy G0AMD tackles an all too common problem.

the logs for some sort of exciting event yielded nothing. Nevertheless, many operators were delighted with what they could achieve with only 3 watts in such flat conditions. G0EHV, for example, who says "no real DX was heard at all. However, 3 watts of power to the South Coast from Tyne and Wear must be good going".

The distribution of the active stations gave rise to some comment, for example from G0MCG/P: "what was pleasing was the number of GM stations that were around to work", while at G6HH/P, near Hastings and thus just a short hop across the Channel, they found "absolutely minimal operation on the continent". G0JLF/P (in IO80) complains of "a complete absence of contacts in IO91 square. Where were they all?". Well John, there were at least the nine entrants in that square active, plus the contest adjudicator himself and many others "giving away points", so perhaps this shows how easy it is to miss a square as a multiplier.

One common observation of activity; many stations found it very slow going towards the end of the contest. GW6TEO/P probably has the answer: "Where did everyone go to after 1500 hours? No contacts

for 40 minutes! Was everyone watching Ireland play in the World Cup?"

Weather

For many, the tradition of a hot sunny day for the *PW* contest continued. At G6HH/P "the weather was exceptional and allowed operation at a picnic table all day". In some areas however, this didn't last. G6ESJ/P says "the fine sunny morning was wasted on us as we raced to get set up in time. Later the weather, like our performance, deteriorated and the afternoon was spent in drizzle." The consequences of wet weather for portable stations are various. At G1GVA/P "in the afternoon it rained. I had to keep the car window open to pan the antenna so the last three pages of the logs got a bit damp." Mountain summit conditions can be rather more severe, at G10EJN/P the high winds took their toll on the 8-element quad, which lost its reflector - "we brewed some more tea and carried on regardless, the tent was cosy and neither of us fancied the struggle with the wind to get it down and up again."

Perhaps the most severe effect was at GM3NHQ/P, at 1245 metres

a.s.l. on Cairngorm. He only stayed for half an hour because "it was a bit cold due to the snow lying nearby!"

Signal Quality

One disappointment this year was a number of remarks about stations apparently radiating poor quality signals. Although no seriously broad signals were heard by the adjudicator (just a few which sounded rather 'odd'). It seems that in some areas there were problems, which is an unwelcome change for this contest, having had relatively few such problems in the past. In the articles about the QRP contest, the importance of having a receiver which has good strong signal handling capability has always been emphasised, and the inevitability of problems when stations operate at close range has been highlighted. Equally, the correct adjustment of the transmitter and especially, any speech processor in use, has always been underlined. Some operators seem to think that a low power rig can't cause any problems, whereas in fact there is just as much scope for over-driving and producing a broad signal as when a high power is in use. And, as has so often been said, even a QRP signal can be very very strong, especially when it comes from a superb location and is backed up by an array of large Yagi antennas.

The comments received this year were mainly of a general nature and of those who did implicate individual stations, no more than one complaint was received against any particular station. However, for next year's contest we will be looking for a way of encouraging genuine reports of poor signal quality and penalising the offenders - a 'get tough' policy to nip this unwelcome development in the bud!

Leading multi-operator stations

Pos	Name	Call	Score	QSO	Squ	Loc	An	a.s.l.m	TX/RX
1	Mansfield Contest Group	G0MCG/P	15040	376	40	IO93EC	4x14P	380	IC-275E
2	Cymru Contest Group	GW4VEQ/P	13904	316	44	IO73XC	6Q	1080	TR-751E
3	Guildford & District RS	GW5RS/P	7337	253	29	IO81NV	4x19Y +2x17Y	425	IC-251E
4	R. Thornley & S. Maher	G1NUS/P	7221	249	29	IO93CF	2x9Y	400	FT-290R
5	Oldham Radio Club CG	G1ORC/P	6748	241	28	IO93BJ	2x9Y	635	IC-251E
6	The TOAD DX Group	GW1MOU/P	6578	253	26	IO82KW	16Z	405	FT-290R
7	Rugby Amateur Transmitting Society	G7APD/P	6554	226	29	IO92LJ	4x17Y	210	FT-225
8	Civil Aviation Authority RS (Prestwick)	GM4CAA/P	6300	225	28	IO85DJ	17Y	725	FT-290R
9	Truckers Contest Group	GW1HGV/P	5373	199	27	IO81KW	9/9S	800	TR-751E
10	The Windbreakers CG	GW4VIX/P	4975	199	25	IO81LR	2x15Y	425	IC-275

Certificate Winners

Leading single operator stations

Pos	Name	Call	Score	QSO	Squ	Loc	Ant	a.s.l.m	TX/RX
11	Roger Dyke	GW4NVA/P	4876	212	23	IO83JA	17Y	560	FT-225RD
19	David Wright	G0MTV/P	3725	149	25	IO94MJ	18Y	425	TS-780
22	Jon Page	G1POS/P	3427	149	23	IO92CA	8Q	300	FT-480R
23	Peter Thompson	G8DDY/P	3322	151	22	IO96JO	2x19Y	235	FT-221R
24	Dave Hewitt	GW8ZRE/M	3278	149	22	IO83JA	HB9CV	560	TR-751E
32	Gary Hawkins	GW1YDA/P	2907	171	17	IO81LS	17Y	580	FT-290R
34	Tony Crake	G1GVA/P	2793	133	21	IO91GI	13Y	290	TR-751E
41	Dr. John E. Tindle	G3JXN	2106	117	18	IO91UM	9Y	60	TS-790
43	Steve Williamson	G3WGU/P	2079	99	21	IO83QW	10Y	510	FT-290R
47	Tim Raven	G4ARI	1820	91	20	IO92IQ	10Y	200	F-850

Overall Winners	Mansfield Contest Group	G0MCG/P
Runners-up, Leading Welsh station and Leading single-antenna stn.	Cymru Contest Group (Tony & Tom Jones)	GW4VEQ/P
3rd Place	Guildford & District Radio Soc.	GW5RS/P
Leading single operator Runner-up single op. 3rd placed single op.	Roger Dyke David Wright Jon Page	GW4NVA/P G0MTV/P G1POS/P
Leading Scottish Station Leading Irish Station	Civil Aviation Authority RS Fred Sweeney & Paul Knocker	GM4CAA/P G1OEJN/P
Leading fixed station	Sutton & Cheam Radio Society	G3OLX

Operating Practice

On the brighter side, QRP contest entrants continue to maintain a high standard of operating. G0EHV, who has "worked many contests in the past", notes that "operating standards seemed very high". At G1OEJN/P, "we felt that operating standards and courtesy shown were generally excellent both by the portable stations and the many fixed stations who gave points to so many." Of course there's always the odd one - G6HH/P says "standard of operation by all but one wally was good."

A few specific operating procedures are worth sharpening up, however. At G0JLF/P, "it was surprising how many stations called us at least twice after working us. Obviously checklogs were not being used as effectively as they should." Elsewhere they were in use, but with insufficient care: G6ARC/P kept finding that "some stations thought they had already worked us", there was GW4ARC/P and possibly other ?-ARC stations active. "So perhaps some thought needs to go into check-logging" concludes G6ARC/P.

G1JHZ/P was concerned about congestion: "When will people

learn that there is life outside the band 144.250 - 144.350MHz? Such crowding just caused huge amounts of QRM." There's also the long-standing meaningless signal report phenomenon. While some stations seem hell-bent on giving every contact RS59, no matter how much difficulty they are having in copying, G14SJB/P remarks on the other extreme: "How the station that gave me RS20 as a report heard enough to know who he was talking to beats me."

Mishaps

As usual, there was no shortage of groups for whom things went less than smoothly. Site problems beset GM6FPX/P; "the farmer giving me permission had forgotten he'd already said yes to another group. I got there to find antennas already erected." The site at G1JDP/P turned out to be less than perfect, too. They found themselves with a problem one doesn't expect after climbing to 520 metres - "passing within 6 metres of our station was a vintage car rally. What a noise, with ignition systems red hot after the long climb! For two hours they passed". A more conventional problem at GW4VEQ/P, "a transistor blew in the rig at 1606 and that was the end of that." A less common, but important, piece of equipment failed at G1JHZ/P - the digital watch! "I did not ask other stations for the time as I felt this would create more difficulty", so he estimated the time aided by the odd contact with a friend who gave him time checks, and by listening to BBC broadcasts.

There was "one costly mishap" at the winning station, G0MCG/P. "The generator, which was borrowed for the first time, blew the mains power supply in the IC-251E. We tested the mains and found that it had 120V between earth and neutral! Fortunately we could run the IC-251E on 12V so some hasty changes enabled us to continue."

However, the greatest misfortune must surely have been that of Peter PE1MHO, visiting Scotland and operating as GM/PE1MHO/P. He earns the distinction of achieving the lowest

ever score by an entrant in the contest - just ONE point! He explains: "Our DXcapade turned into an absolute fiasco. Due to a misunderstanding with the ferry operator, I was unable to get to the Isle of Mull, so my wife and I went out to the Ardnamurchan Peninsula, the most westerly part of the UK mainland - I wish I'd never thought of it! All those miles just to reach the spot, all that being eaten alive by midges, and for what? ONE QSO! Just to add insult to injury the gearbox in my car (not yet two months old) seized up. I had to pay £144 towing costs. This has resulted in a ban on future DXcapades from my XYL. She says next year I'll have to do it here in Holland".

One compensation for Peter - despite everything, he gets the certificate for being the leading station in IO66 square!

A Great Day

"A great day, a great contest", says G6HH/P, with similar sentiments from many others. G6ESJ/P notes that "it is a great first contest for beginners with its relaxed (I must be joking) atmosphere". One such beginner was GW7BOY: "My first venture into any competitive radio event and to be honest I was shocked at

Leading Stations using a single antenna

Pos.	Name	Callsign
2	Cymru Contest Group	GW4VEQ/P
6	The TOAD DX Group	GW1MOU/P
8	Civil Aviation Authority RS	GM4CAA/P
9	Truckers Contest Group	GW1HGV/P
11	Roger Dyke	GW4NVA/P
12	Neil Underwood & Martyn Wright	G4LDR/P
13	Chippenham Moonrakers	G7DIP/P
14	Stroud Amateur Radio Society	G4RSR/P
15	Laugh-a-minute Contest Group	G4ILL/P
16	St. Helens & District ARG	G1STH/P


the amount of activity during the day. I worked stations in areas which I have always considered closed to me."

This latter point continues to delight those active in the contest - EI2SDR/P says "we were amazed at the reports we were receiving from distant squares and at the strengths of the signals we heard." G1JHZ/P, too, was "pleasantly surprised by how well my modest station performed".

As usual, most stations conclude by saying that they are looking forward to next year's contest and are starting to plan the improvements they will make. So with thanks to all who participated this year, let's start thinking about the ninth *Practical Wireless* 144MHz QRP Contest, the date for which is provisionally Sunday 16 June 1991. **PW**

Leading stations in each locator square

Square	Name	Call	No. entrants in square
IO83	John O'Sullivan	EI6ARB/P	3
IO66	Dragonslayers DXcapade	GM/PE1MHO/P	1
IO70	Bideford Bay Radio Club	G0JKD/P	3
IO71	Pembroke Puffins Contest Group	GW6TEO/P	1
IO72	Ian B. Eldred	GW0MKQ/P	1
IO73	Cymru Contest Group	GW4VEQ/P	1
IO74	Fred Sweeney & Paul Knocker	G1OEJN/P	3
IO75	Wigtownshire Amateur Radio Club	GM4RIV/P	3
IO76	Stirling & District ARS	GM0GMD/P	1
IO80	Neil Underwood & Martyn Wright	G4LDR/P	6
IO81	Guildford & District Radio Society	GW5RS/P	10
IO82	The TOAD DX Group	GW1MOU/P	5
IO83	Roger Dyke	GW4NVA/P	13
IO84	John Baker & Don Birch	G0MTQ/P	3
IO85	Civil Aviation Authority Radio Soc	GM4CAA/P	2
IO86	George McKay & others	GM0ARH/P	2
IO87	Tom Harrison	GM3NHQ/P	1
IO90	Peter Thompson	G8DDY/P	2
IO91	Laugh-a-minute Contest Group	G4ILL/P	9
IO92	Rugby Amateur Transmitting Society	G7ADP/P	12
IO93	Mansfield Contest Group	G0MCG/P	12
IO94	David Wright	G0MTV/P	5
JO00	Hastings Electronics & Radio Club	G6HH/P	1
JO01	South Essex Amateur Radio Society	G4RSE/P	5
JO02	Chippenham Moonrakers	G7DIP/P	7
JO03	Spilsby Radio Club	G7BPR/P	1
JO11	Frank L. Laanen	PE1EWR	1
JO32	Dragonslayers QRP Group	PA3FGI	1

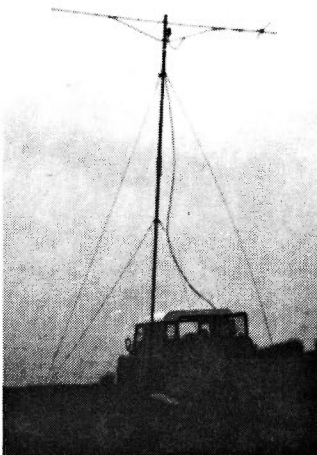

GW6TEO/P apparently on the brink!

YAESU
ICOM
Authorised Dealer

MARTIN LYNCH

G4HKS

AMSTRAD
STANDARD
Authorised Dealer

THE AMATEUR RADIO EXCHANGE CENTRE

286 Northfield Avenue, Ealing, London W5 4UB. Tel: 081 566 1120 Fax: 081 566 1207

After working with **Bernie** and **Brenda** for many years, the rumours and rumblings are true. I've finally opened up my own showroom specialising in Amateur Radio, in Ealing, West London. In fact, in a very familiar location - at the other end of NORTHFIELD AVENUE where the original "**AMATEUR RADIO EXCHANGE**" used to be! Easy to park, (no it is not on a "gyrating" roundabout!), with Northfields Tube Station just across the road, Bus Stops everywhere, M4 and M25/M40 motorways within minutes.

My policy? Much as it used to be in the earlier days - offering you a chance to buy or exchange good, clean Amateur Radio Equipment at sensible prices. I'm an **AUTHORISED OUTLET** for Yaesu, Icom, Standard and many more, plus a few I'm still working on, (Ian and Richard, please note!). That means you will get full service and spares back-up on all that I'll sell you.

If you have any **Amateur Equipment, Computers, Hi-Fi or Video** to part exchange or sell, then ring now for a quote. If you cannot get to the shop, I will collect


it within 48 Hours and, if it is as good as you say, a cheque will be on it's way by return. Alternatively, exchange it for something of more interest to you or leave it with me to sell for you on commission. You tell me what you want, and I will guarantee that amount, once sold on the spot!

So, there it is. The showroom is nice and big for you to browse, and spend loads of money! (I've always liked the money bit!).

Whether you have something to buy or sell, give me a ring - you will find other familiar faces at the shop who are dying to talk turkey. Have a rummage for that unwanted equipment - I want it **NOW**, to sell for you. The quicker it is on display, the faster it gets sold and you get your money. Simple isn't it!!

73 Martin G4HKS

For fast mail order Tel: 081 566 1120
Please add £10 for 48 hour delivery.
Shop opening hours:
Tuesday - Saturday 10 - 6pm.
Fax order line open 24 hours.

Martin Lynch is a Licensed Credit Broker
Full details upon request
PHONE 081 566 1120
VISA  RSGB

WEATHER MONITORING

SEE US AT LEICESTER

Check out our
NEW LOW PRICE MODELS!



- WIND DIRECTION
- WIND SPEED
- GUST ALARM
- GUST SPEED
- RAINFALL
- SUNSHINE
- BAROMETRIC PRESSURE
- OUTSIDE TEMPERATURE
- MIN-MAX TEMPERATURE
- RELATIVE HUMIDITY
- TIME
- WOODEN CABINET
- MAINS & 12-24V DC

Models to suit all requirements



Available direct from manufacturers

**R&D ELECTRONICS. 318A NORTHDOWN RD
MARGATE. KENT CT9 3PW TEL: (0843) 221622**

SGC SG-230

SMARTUNER


HF ANTENNA COUPLER

SSB, AM, CW & DATA

FAST - INTELLIGENT - ACCURATE

OPERATES WITH ANY HF TRANSCEIVER

The *Smartuner* high technology coupler intelligently tunes any length antenna (8 to 80ft) in the HF band. The unit will operate with any HF transceiver within its specifications. The *Smartuner* switches 64 input and 32 output capacitance combinations plus 256 inductance combinations in a "pi" network resulting in over a half-million different ways to ensure a perfect match for the transceiver; and, it remembers the frequency and the tuning values and will re-select these values in less than 10 ms next time you transmit on that frequency.

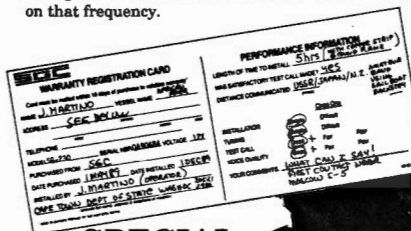

**SPECIAL
HAM PRICE:
\$555.00**

Includes shipping to U.K.

- MICROPROCESSOR CONTROLLED
- NON-VOLATILE MEMORY
- WATERPROOF
- B.I.T.E. INDICATOR
- FOR MARINE, AVIATION, HAM AND PARA-MILITARY APPLICATIONS
- 1.8 TO 30 MHz RANGE
- 10 TO 150W INPUT POWER
- 10ms RETUNING TIME
- 8 TO 80 FT ANTENNA (ALL Types)

Visa and Mastercard/Access Accepted

DEALER ENQUIRIES ARE WELCOME

DELIVERY FROM STOCK

SGC Inc. SGC Building, 13737 S.E. 26th St. Bellevue, WA. 98005 USA
P.O.Box 3528, 98009. Telex: 328834. Fax: (206) 746-6384 Tel: (206) 746-6310

PACKET

Roger Cooke G3LDI answers the questions often asked by someone who is new to the packet radio scene.

Nodes have always been a source of mystery to some users. In order to explain their operation, Nick Martin G6NHH has written a very comprehensive guide, essentially for the newcomer, but quite a useful reference for all concerned. It is presented here in its entirety.

This guide is mainly intended for those new to packet. I will attempt to unravel the jargon and explain in as simply as possible how nodes work, and how to get the best from them. If you're reading this via packet you obviously know what a TNC is and how to connect it to a radio and some sort of terminal, so we won't be starting from absolute basics! There are several types of packet node which you will encounter - TheNet, NET/ROM, BPQ, TCP/IP and KA nodes, but for now we will be referring to the TheNet and NET/ROM types, which are used extensively by GB3 and GB7 nodes.

What is a Node?

The set up of a node is very similar to the that which you are using at your station, except that a node's TNC contains different software, and there usually isn't a terminal permanently connected. The main task of a node is to help establish

connections, and the software contained inside the TNC is specially written to do that. We shall see later that this software is very powerful, and much of what the node does is transparent to the users. The software has been designed so that the node can send information about itself to other nodes and receive similar data from other nodes with the minimum of interference to users.

How it all works

To avoid creating extra traffic when conversing with other nodes, a node uses a special abbreviated language called 'Level 4' (most ordinary users on packet use Level 2). Since node TNC's are basically simple computers, node-to-node 'chatter' need not be in plain language. So on a normal 'Level 2' terminal this data will appear as hieroglyphics! A node needs to know the callsigns of other nearby nodes, so each node sends out a 'Nodes Broadcast' at regular intervals (usually every hour). This broadcast contains: (1) the callsign & alias of the node sending the broadcast, (2) information about neighbour nodes which it can 'hear' including the 'route quality' (see later), (3) information about nodes even further away, which

neighbouring nodes have 'heard'.

On receiving these broadcasts, the node can build two 'tables', which are called the 'Routes Table' and the 'Nodes Table'. These tables can be accessed by users, and used as a guide when they wish to connect to other stations (or other nodes). A connection needn't involve just one node, connections can be made (or attempted!) by using several nodes. Those who have only had experience with voice repeaters may find it difficult to grasp this concept - it can be likened to a frog crossing a pond, the frog cannot jump the whole pond at one go, but by jumping from one lily-pad to another it can eventually cross the pond. When you connect to a node it is like landing on a lily-pad, you can then 'jump' to the next pad (node), and so on. The ROUTES TABLE is accessed by sending the command 'ROUTES' (or R). The node will reply with a list similar to the one shown in Fig. 1.

The '>' symbol is relevant because (unlike normal stations), nodes do not disconnect from one another when a user's connection is terminated. Even if there are no other communications going on involving the two nodes, they

continue to periodically ask each other "Are you still receiving me?" for about 15 to 30 minutes after the last users have disconnected (all in 'Level 4' code of course!). This is done to save time on air and reduce congestion, well-used links do not have to be re-established every few minutes.

Route Quality


The route quality of adjacent nodes is usually 'locked in' by the Sysop, because when the node 'hears' a nodes-broadcast from another node it has no way of telling how strong the radio signal was. The received broadcast could be from another node just 25km away, or alternatively it could be from a node 150km away and heard under quiet or 'lift' conditions. Usually the Sysop will 'lock in' all of the immediate neighbour nodes with their corresponding route qualities, and allow 'rogue' nodes to enter the routes table with a default low quality (usually 10 or 20). He might also decide to 'lock out' a node (locked with zero quality) if the path is 'one-way' (i.e. can be heard but not able to be contacted). This is important as route qualities are not only for the benefit of the user, they are used by the nodes themselves when deciding on the best path for a connection. As an example, let's consider just three nodes, which for sake of simplicity we will call A, B and C. A cannot 'hear' C (and vice-versa), but good radio paths exist between A-B and B-C. B will tell C that it can also 'hear' A, but what route quality will C assign to the path via B to A.

A > route quality = 100 < B > route quality = 100 < C

This is where the computing power of the software takes over. There is an established formula which the node uses to calculate the effective 'route quality' of the path A-C. This is given by:

$$\text{Route quality (A - C)} = \frac{(X \times Y) + 128}{256}$$

Fig. 1

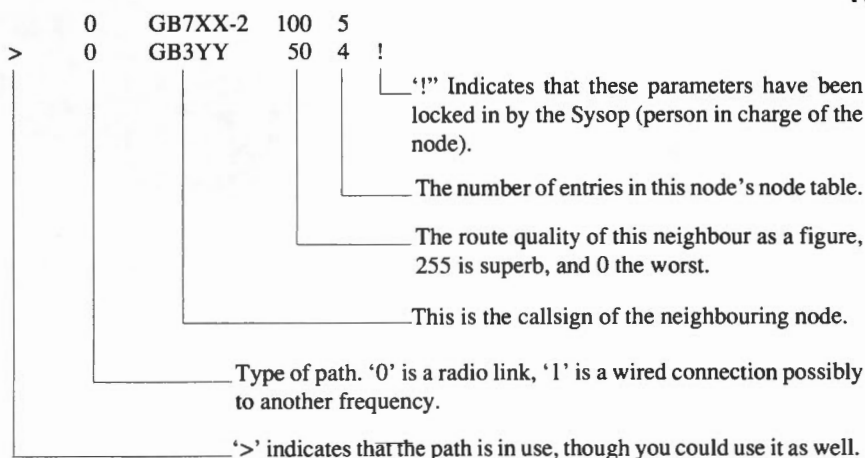

ANORAMA

Where X = the path quality existing between node B and node C and Y = the quality of the route A-B as broadcast by B.

If you feel that the maths is getting a bit 'heavy', don't worry, this is as complex as it gets! And if you can't understand the formula, then remember that some sort of 'attenuation factor' has to be applied, otherwise nodes could claim to be able to connect to any other node in the world, since (eventually) the info about all the nodes would pass unhindered across the network!

To the user, the 'NODES TABLE' is a list of nodes to which a usable path exists, and it can be listed by sending a 'NODES' (or N) command. This may not be a 'one-hop' path, depending on the inter-node path qualities inbetween. An entry on a nodes table could be five or more 'hops' away. The nodes table includes both the callsign and the alias of each node, and connect requests can be made to callsign or alias. The user doesn't really have to concern him(or her) self with the actual path the connection takes - the node itself only knows the immediate neighbour(s) which claim to have paths to the required node. One can, however, ask the node about these neighbours.

For example, a 'NODES' command issued to our node GB7XX sends back a list which includes the list as shown and described in Fig. 2.

Route Quality to Neighbour

The character '>' indicates path is in use. As stated before, the node doesn't know the exact route to each entry on the nodes table (there isn't enough memory to store it), and we do not need to concern ourselves with it either. The obsolescence count ensures that the optimum path is chosen if two or more neighbours with equal route qualities all claim to have paths to our required destination. TheNet, NET/ROM and BPQ nodes use 'automatic adaptive routing' which simply means that they can quickly adapt to varying radio conditions. Indeed, the path taken by our connection could change whilst


we are connected, as the system is constantly monitoring and adapting to network conditions. If a path should fail while it is in use and the node has an alternative, it will attempt to restore the connection using the alternative. This system is also quick to adapt itself should a node suddenly go 'off air' due to a failure somewhere. Most of the other commands available on TheNet and NET/ROM are fairly self-explanatory. The 'USERS' command lists the connections currently existing (or in the process of being made). The command is useful if you're thinking about trying a 'DX' connection - this might not be too successful if another user is flooding the node by downloading text from a BBS! The 'CQ' command enables users to connect to a node (either direct or via multi-hop), and then send out a CQ beacon. The Syntax is 'CQ<up to 80 characters of text>'. Those replying to your CQ would connect to your callsign AS IT APPEARED ON THEIR SCREEN. There is a command 'I' (which is INFO on TheNet and IDENT on NET/ROM), which will cause the node to send info about itself which has been entered by the Sysop. There is also a 'PARAM' command - this causes the node to send out a list of numbers which correspond to certain parameters set in the node. They cannot be changed by anyone other than the Sysop, so we won't go into details of their meaning. How does a user know what type of node that he/she has connected to?

A little detective work is required here, since TheNet, NET/ROM, and BPQ nodes all behave in a very similar manner. You can tell a lot from the response of the node to your initial connect request. If the symbol after the callsign/alias is a '>' you are almost certainly connected to a TheNet node. However, both NET/ROM and BPQ nodes respond with a '}', so a little more work is required. Fortunately, BPQ nodes are easily identifiable, as their response to a 'U' command will include the G8BPQ callsign and software revision number.

KA nodes don't follow this form as they don't work the

XX2:GB7XX > Routes to YY2:GB7YY

Fig. 2

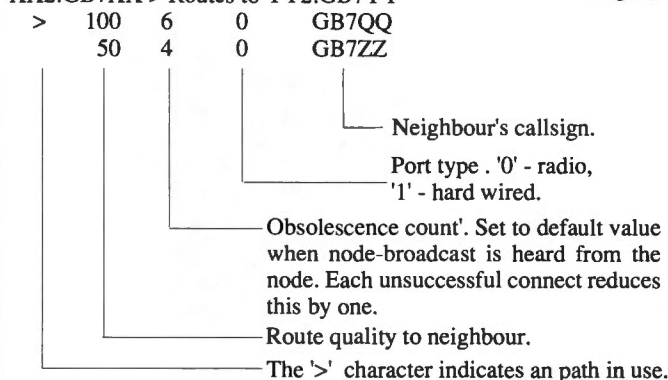

same way as other nodes, but they will at least list the NET/ROM type nodes that they have heard. So an automatic, 'multi-hop' link will not use KA nodes. KA nodes always identify themselves as KA when you connect to them. TCP/IP is a complex system of file and message transfer which 'rides on the back' of NET/ROM type nodes, and later versions of TCP/IP (or NOS) emulate some (but not all) of the functions of NET/ROM.

Digipeating

This mode is not encouraged through NET/ROM, TheNet and BPQ nodes! In fact, the 'digi' facility on most of these nodes is disabled, so users would be most unwise to try a multi-node digi! Where the 'digi' is enabled, it is really there so that 'Mail For:' beacons of BBS's can be relayed over a wider area. With all this sophisticated software at your disposal, why should you want to 'digi' anyway?

BPQ

BPQ nodes use software written by John Wiseman G8BPQ. This software enables stations to emulate the workings

of TheNet and NET/ROM using an IBM PC/XT/AT computer with TNC's or internal TNC cards. BPQ nodes usually work in conjunction with a 'GB7' BBS or private mailbox. Most BPQ type nodes will operate on more than one frequency, and the software is configured in such a way as to make it easy for users to choose which frequency to make outgoing connections. For this reason there is a 'PORTS' command, and this causes the node to list port numbers and frequencies. The 'ROUTES' command on BPQ will result in a slightly different response -

> * GB7XX 100 5! where the '*' will be replaced by a port number. Connections to other nodes do not normally need a port number, but connections to other stations do. So, on a BPQ node, to connect to G9XXX on Port 3 you would send-

'CONNECT 3 G9XXX' (or C 3 G9XXX).

If you omit the port number the BPQ node will list its ports and ask you to repeat the connect request using a port number.

That's it for another month. News, views and comments to G3LDI, QTHR, @ GB7LDI or Tel: (0508) 70278.

Please note:

NET/ROM is a trade-mark of SOFTWARE 2000 Inc.
TheNet is the copyright of NORD<LINK Software.
BPQ software is the copyright of John Wiseman G8BPQ.
TCP/IP software is the copyright of Phil Karn KA9Q.
KA is a trade-mark of Kantronics.



Specifications

Frequency range:	144.00 - 145.995MHz
Type of Emission:	F3 (f.m.)
Antenna Impedance:	50Ω unbalanced
Power Supply:	5.5 - 12V d.c. (rated voltage 8.4)
Current consumption:	130mA at maximum audio output on receive.
Standby mode:	18mA
Transmitting (high power):	550mA
Transmitting (low Power):	220mA
Operating temperature:	-10 to 60°C
Dimensions:	60 x 40 x 170mm
Weight:	Approximately 490g including batteries and antenna

Receiver Section

Type of Receiver:	Double Superheterodyne
Intermediate Frequency: 1st	10.695MHz
2nd	455kHz
Sensitivity	Better than 26dB Signal to Noise with 1μV input
Selectivity:	-60dB (±15kHz)
Bandpass Width :	±7.5kHz (-6dB)
Spurious sensitivity:	Less than -60dB
Audio output power:	More than 300mW into 8Ω impedance, 10% distortion.

Transmitter Section

Transmitter output power:	High 1.5W
	Low 150mW
Type of Modulation:	Reactance modulation
Maximum deviation:	±5kHz
Spurious emission:	Less than -60dB
Microphone:	Built-in Electret condenser type

Price: £129.00 + £5.00 carr

KENPRO KT-22E

The first station I worked on 144MHz with the Kenpro KT-22E laughed when he heard that I was only now discovering the joys of stroke 'P' operation (in this case I mean pedestrian) on the band. He enjoyed pointing out that nowadays many operators start on 144MHz with a hand-held transceiver before graduating to a 'main station' type rig. Of course, I had to do it the wrong way round but I did get there in the end!

To say that I'd never operated a hand-held rig on 144MHz is not strictly true, but the last time that I enjoyed using a hand-held transceiver was in the days of a.m. on the band. Some readers may well remember the successful circuit for an easy-to-build a.m. transceiver design, published by G. Packer (then GW3UUS but now G3UUS) in *Short Wave Magazine*.

Along with many others, I built this little rig and enjoyed using it from hill-top sites. The transceiver - despite its 'swooshbox' (super-regenerative) receiver - added a new dimension to my 144MHz work. It even managed a cross-channel QSO from an inland Hampshire hillside!

I don't know if imported hand-held receivers for 144MHz were available then, but I did notice one or two adventurous types using what we called 'funny mode'. You would always notice when you worked one of these 'different' types because their received audio would be low (due to inefficient 'slope detection') on an a.m. receiver.

Life turns full circles at times and now f.m. rules while a.m. is the odd man out! Another big difference is that the modern hand-held f.m. transceiver has an on-board synthesiser, bringing big savings by eliminating crystal-control.

Using The Rig

The Kenpro KT-22E is not new on the market but it deserves a mention as it's certainly in the 'bargain basement' price range. As such, the transceiver could prove to be the first equipment owned by a newly-licensed amateur.

When the review model arrived I found that it came complete with a two-pin (plug adaptor required) battery charger, the NiCad batteries, a reasonable handbook, carrying strap and 'rubber duck' type of antenna.

Operating the transceiver is simplicity itself. The 'thumbwheel' type selector switch for the synthesiser was easy to use despite my larger than usual hand. The instruction

manual clearly explained how to interpret the digits on the switch and front panel into the operating frequency.

The transceiver is very simple to operate and the recessed switches controlling power output, simplex, duplex and repeater frequency shift are easy to use. The audio quality on transmit and receive was remarkably good - even when compared to the middle-price range transceiver fitted in my car.

Good Reports

Other operators commented on the audio quality and how well the little rig was accessing the various repeaters. It was a new experience to access the local repeater while sat in my favourite armchair.

However, the transceiver came into its own whenever I took our Labrador for a walk on the local hills. She quickly learned that when the rig came - we'd be having a longer walk while I chatted to friends old and new. I also found that the transceiver's audio output was sufficient for windy locations and that in many cases I could safely reduce the output power to the low setting.

One of my favourite locations in the Dorset hills is not far from a multiple-user p.m.r. repeater station. This station has many transmitters operating on a wide range of frequencies and can easily cause cross-modulation. I was most impressed at the way the KT-22E reacted in this situation, with not a sign of cross-modulation to be heard when I was within 250 metres of the p.m.r. site.

Opinions

In my opinion this little transceiver is a 'bargain buy' and returns excellent value for relatively little money. I enjoyed using it very much and could have ended this review with the reviewers cliché 'I liked it so much I bought it'.

This time however, I can't use the phrase as the review model had been sold while it was on loan! So, unfortunately the transceiver had to go back to ARE Communications, at 6 Royal Parade, Hanger Lane, Ealing, London who had kindly loaned it for review. I'd very much like one of these rigs...but I'll just have to wait my turn - although I think it will be worth it in the end!

PW

REVIEW

Rob Mannion G3XFD rediscovers the joys of 'pedestrian portable' operation with the aid of a Kenpro KT-22E hand-held 144MHz f.m. transceiver.

G6XBH G1RAS G8UUS

Visit your Local Emporium
Large selection of New/Used Equipment on Show

AGENTS FOR:
YAESU • AZDEN • ICOM • NAVICO • ALINCO

ACCESSORIES:

Welz Range, Microwave Modules, Adonis Mics, Mutek Pre-Amps,
Barenco Mast Supports, DRAE Products, BNOS Linears & P.S.U.'s
★ ERA Microreader & BPS4 Filter, SEM Products ★

AERIALS, Tonna, New Diamond Range of Mobile Whips, Jaybeam
BRING YOUR S/H EQUIPMENT IN FOR SALE

JUST GIVE US A RING

Radio Amateur Supplies

3 Farndon Green, Wollaton Park, Nottingham NG8 1DU
Off Ring Rd., between A52 (Derby Road) & A609 (Ilkeston Road)
Monday: CLOSED Tuesday-Saturday: 10.00 a.m. to 5.00 p.m.

Tel: 0602 280267

R.A.S. (Nottingham)

R.A.S. (Nottingham)

SYON TRADING 16 THE RIDGEWAY

FETCHAM, LEATHERHEAD, SURREY. KT22 9AZ
Tel. 0372 372587 Callers by appointment only

Speaker Mike £7-95 N Plug (for RG58) £1-85 each or 3 for £5-25, 5 for £8-50

£1 BARGAIN PACKS : 15 x 0.1uF 50v(CK05) 12 x 0.1uF 50v Disc 12 x small coil
former 8 x mixed silver mica 5 x grey skirted knob 12 x ZTX107 (plastics BC107)
5 x 2N2222A 4 x matched Schottky diodes (ideal ring mixer) 4 x 5v 0.4A regulator
(TO 220) 12 x BSX26 (NPN 350 Mhz. switch) 4 x 2N5495 (NPN 50w 7A TO 220)
10 x BCY72 (PNP 200 Mhz. 200ma.) 8 x 0.047 uF 1500v tubular 7 x ceramic coil
formers 2 x 75 ohm BNC angled plugs 5 x 80 pF air trimmers

PLUS BARGAIN PACKS AS PREVIOUSLY ADVERTISED

COAX RELAYS - BNC 100W cw to 500Mhz. 2 way 24V £18. - 4 way 12V £22. - 6 way
12V £25. 6 x Used Greenpar PL259 £3. 100 assorted LEDs £5

ALSO STOCKED :- Kanga Kits - Black Star Products - Malsor Kits
Nevada Products - Spectrum Kits - Resistors - Capacitors - Diodes
Switches - Regulators - Semiconductors - Connectors - Cable.

ACCESS : VISA : CHEQUE p&p 75p

RADIO AMATEURS EXAM? PASS FIRST TIME!

Before you enrol check the benefits of
RRC'S unique Home Tuition Service

RRC has helped thousands of students to success in their
examinations with this unique system of postal tuition, one which
guides you, step-by-step, to qualify in the shortest possible time.
Only The Rapid Results College offers you all these advantages:

- | | |
|--|---|
| <input checked="" type="checkbox"/> A qualified personal tutor | <input checked="" type="checkbox"/> Free advice before you enrol |
| <input checked="" type="checkbox"/> Study material prepared by specialists | <input checked="" type="checkbox"/> Telephone Helpline |
| <input checked="" type="checkbox"/> Completely self-contained courses | <input checked="" type="checkbox"/> Free 'How to Study' Guide |
| <input checked="" type="checkbox"/> Handy pocket-sized booklets | <input checked="" type="checkbox"/> Instalment Plan |
| <input checked="" type="checkbox"/> Personal study programme | <input checked="" type="checkbox"/> Free Postage on course material |
| <input checked="" type="checkbox"/> Regular marked tests | <input checked="" type="checkbox"/> Worldwide Airmail Service |
| <input checked="" type="checkbox"/> Courses regularly updated | <input checked="" type="checkbox"/> Extra tuition free if you don't pass first time |
| <input checked="" type="checkbox"/> 48 hour despatch | |

POST COUPON TODAY FOR FREE RADIO AMATEURS PROSPECTUS
Please send me my prospectus as quickly as possible.

Mr/Mrs/Miss/Ms _____

Address _____

Postcode _____



The Rapid Results College



Dept. JX100, Tuition House, London SW19 4DS. FREE ADVICE: 081 947 7272 (9am-5pm)
PROSPECTUS: 081 946 1102 (24 hour Recordedcall Service guiding Dept. No. above)

Bredhurst
electronics



BREDHURST ELECTRONICS LTD.
High St, Handcross, W. Sx. RH17 6BW
(0444) 400786

SITUATED AT SOUTHERN END OF M23 — EASY ACCESS TO M25 AND SOUTH LONDON

RECEIVERS

Lowe HF225	£425
Icom ICR71	£855
Kenwood R2000	£595
Kenwood VC10 V.H.F.	
Converter	£161
Yaesu FRG8800	£649
Yaesu FRV8800 V.H.F.	
Converter	£100
Kenwood R5000	£875

HF TRANSCEIVERS

Kenwood TS950s	£3199
Kenwood TS940s	£1995
Kenwood TS440s	£1138
Kenwood TS140s	£862
Kenwood TS680s	£985
Yaesu FT767GX	£1599
Yaesu FT757GX2	£969
Yaesu FT747GX	£659
Icom IC765	£2499
Icom IC751A	£1500
Icom IC735	£979
Icom IC725	£759
Icom IC726	£989

2M TRANSCEIVERS

Kenwood TH26E	£249
Kenwood TH25E	£238
Kenwood TH205E	£199
Kenwood TH215E	£228
Kenwood TR751E	£599
Kenwood TM231	£289
Yaesu FT411 + FNB10	£259
Yaesu FT290R II	£429
Yaesu FT211RH	£309
Yaesu FT212RH	£349
Icom IC2GE	£265
Icom IC228H	£385
Icom IC275E Inc PSU	£1069
Icom IC2SE	£275
Icom IC2SET	£295

70CM TRANSCEIVERS

Kenwood TM431E	£318
Kenwood TH405E	£245
Kenwood TH415E	£268
Yaesu FT790R11	£499
Yaesu FT712RH	£375
Icom IC4GE	£299
Icom IC4SE	£310
Icom IC448E	£429

DUAL BAND TRANSCEIVERS

Kenwood TM731E	£665
Kenwood FT790E	£1495
Yaesu FT470R + FNB10	£383
Yaesu FT736R	£1199
Icom IC32E	£399
Icom IC3210E	£499
Icom IC2400E	£635
Icom IC2500E	£675
Icom IC245	£385

SCANNING RECEIVERS

Icom ICR7000	£989
Yaesu FRG9600M	£509
Kenwood RZ1	£465
AOR AR2002	£487
Signal R535 Airband	£249
Icom ICR100	£499

ANTENNA TUNER UNITS

FRT7700	£59
FC757AT	£349
AT230	£208
AT250	£366
ICAT100	£379
MFJ941D	£116
MFJ949C	£165

DATONG

AD370 Active Antenna	£77.62	3.00
FL3 Multimode Filter	£145.54	2.00
D70 Morse Tutor	£63.40	2.00
ASP Speech Processor	£93.15	2.00

COAXIAL SWITCHES

SA450 2way SO239	£19.49	1.50
SA450N 2way N	£26.99	1.50
Drae 3way SO239	£20.18	1.50
Drae 3way N	£35.94	1.50
C54 4way BNC	£30.39	1.50
MFJ-1701 6way SO239	£38.35	1.50

HAND HELD RECEIVERS

Icom ICRIE	£399.00	2.00
R537S Airband	£69.00	2.00
Win 108 Airband	£175.00	2.00
AOR AR1000	£249.00	2.00
YUPIETER MVT5000	£299.00	2.00

AR-1000 Handheld Scanner

- ★ 1000 Channels
- ★ B-600MHz continuous
- ★ 805-1300MHz continuous
- ★ AM, FM (narrow & wide)
- ★ Complete with NiCads and mains charger

£249



GOODS NORMALLY DESPATCHED WITHIN
24HRS — PRICES CORRECT AT TIME OF GOING TO
PRESS — E&OE
MAIL ORDER & RETAIL

SELECTIONS FROM ANTENNA RANGE

J Beam 'Minimax' Tribander	£378.35
J Beam TB3 MK3 Tribander	£365.70
Butternutt HF6V	£182.85
Butternutt HF2v	£163.00
Cushcraft A3 Tribander	£329.00
Cushcraft 2M 15WB	£99.00
Tonna 2050S 5ele 50MHz	£50.72
Tonna 2080S 9ele 144MHz	£33.12
G Whip Tribander 10-15-20	£44.39

MORSE KEYS

Kent Morse key kits	£33.50	2.50
Kent Twin-paddle kits	£42.50	2.50
Kent Single-paddle kits	£33.50	2.50
Hi Mound MK704	£20.00	2.00
Hi Mound MK706	£22.00	2.00
Benchner BY1 Black Base	£67.42	2.50
Benchner BY2 Chrome Base	£76.97	2.50

PALOMAR PRODUCTS

R-X Noise Bridge for antenna checks up to 100MHz	£59.95
Receiver Preamp — 1.8 to 54 MHz	£42.50
Up to 20dB gain	£119.95
Transceiver Preamp — R.F. Switched up to 20dB gain	£149.95
Super Snooper — vertical indoor antenna for SWL	£39.95
Loop antenna — Directional indoor antenna 6 loop ranges	
Tuner-Tuner — ATU adjustment without transmitting	£99.95
SWR & Power meter — LED display	
SWR without adjustment 20W	
2000W PEP	£129.95
2W 20W 200W 2000W PEP expanded display	£189.95
VLF converter — 10-500 KHz converter	£79.95
Baluns 1:1, 1.5:1, 2:1, 3:1, 4:1, 5:1, 6:1, 7.5:1, 9:1, 12:1, 16:1	
350W PEP 1.7-30MHz	£23.95 each
Baluns — up to 6Kw PEP phone for	

BREDHURST ELECTRONICS LTD HIGH ST, HANDCROSS, W. SUSSEX. RH17 6BW (0444) 400786

Open Mon-Fri 9am-5pm except Wed 9am-12.30pm. Sat 10am-4pm

ENTERPRISE RADIO APPLICATIONS LTD.



NOW WITH
VERSION 3
SOFTWARE

ERA LTD
26 CLARENDON COURT
WINWICK QUAY
WARRINGTON WA2 8QP
Tel: (0925) 573118.



All prices
include VAT
& P&P

£154.95


MKII MICROREADER

The Microreader is a small compact unit that allows anyone equipped with a suitable SW receiver, to read Morse & RTTY signals simply and without fuss. No computers, interfaces or program tapes are needed, just connect the Microreader to the ear or speaker socket & switch on. The decoded words appear on the built in 16 character LCD display screen.

The Microreader contains all the filtering & noise blanking needed to allow reception even under bad conditions. A three colour bargraph tuning indicator makes precise tuning simple, while shift indicators take some of the guess work out of RTTY. Despite the fact the Microreader contains two fast processors (12 MHz), it is extremely quiet generating virtually no RFI. The Microreader can also if you wish, transfer the decoded messages to any printer, computer or terminal unit equipped with an RS232 port.

In the tutor mode, the Microreader will send random groups of characters with variable speed & spacing, or plug in your own morse key to check your sending. In both cases the characters are shown on the display.

The MkII Microreader comes complete with audio lead & demonstration tape. Full technical support & advice & upgrade service.

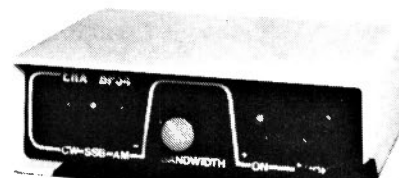

Price £99.50

SEE
REVIEW
PW SEPT 89

BP34

The BP34 audio filter helps you hear weaker stations by eliminating adjacent channel & wide band noise interference. A must for SWLs/Contest groups/CW operators/Weather Fax users.

Easy to connect & use but despite its apparent simplicity, the BP34 has the highest performance specification of any filter you can buy. Exceptionally sharp cutoff, 80dB of stopband rejection & less than 0.3dB passband ripple makes the BP34 more versatile than a whole set of expensive crystal filters!

To order or for more information ring or write. We are open Saturdays for personal callers.

Also available from:

Electromart	— Swansea	Third Eye	— Aberdeen
Flightdeck	— Stockport	Wants	— Plymouth
Johnsons SW	— Worcester	Ward Ect	— Birmingham
R.A.S.	— Nottingham	Waters &	— Hornchurch
Star	— Tyne & Wear	Stanton	Essex

All Products unconditionally guaranteed for 2 years.

Books for radio amateurs
NAVICO

ELLIOTT ELECTRONICS
for the Radio Enthusiast

MICROWAVE MODULES

INSTANT HP AVAILABLE
WHILE STOCKS LAST

QSY OLD MAN TO

AERIAL ACCESSORIES AND MASTS

APPOINTED DISTRIBUTOR

JAYBEAM AMATEUR ANTENNAS

RIGS, ANTENNAS, SWR BRIDGES, POWER SUPPLIES, TEST GEAR, COMPONENTS, MORSE KEYS, COAXIAL CABLES, ROTATORS, MICS, PLUGS AND SOCKETS, SWITCHES

Call us on (0533) 553293
OR COME AND LOOK AROUND AT
26/28 Braunstone Gate, Leicester

The "SRW KILOWATT"

Covers all 9 HF Bands. Weighs under 7Kg. Has internal mains PSU! Matches small rigs size wise (747 etc.). Only 14" wide, 10" deep, 5" high!
Order now whilst you can still buy direct from the designers:
SRW Communications Ltd., ASTRID HOUSE, The Green, Swinton, MALTON, North Yorks. YO17 0SY. Tel 0653 697513. Please write or phone Steve Webb, G3TPW, for details and leaflets.

PLEASE MENTION
PRACTICAL WIRELESS
WHEN REPLYING TO
ADVERTISEMENTS

TURBO-CHARGE YOUR SCANNER !!

Do you own an **R7000**, **FRG9600** or **AR2002**?

Why not upgrade your Scanner into a professional monitoring station with the **SCANMASTER** remote control unit from E.M.P. Ltd

SCANMASTER plugs into the 'Remote' socket on your scanner and takes over its operation and hence greatly expands the facilities and functions available.

SCANMASTER is like a T.N.C. in that you supply it with 12 volts D.C. and talk to it with a terminal via its RS232 interface.

SCANMASTER can be left stand-alone for un-attended monitoring.

SCANMASTER is in constant use by many 'official' organisations.

SCANMASTER has many powerful and easy to use features such as:

- Over 700 memories available.
- Remarks can be assigned to memories.
- Parallel Printer Interface for hard copy output.
- Real Time Clock for time/day logging.
- Frequency offset button for split channels.
- Signal strength logging via A/D.
- Squelch relay output for switching tape-recorder On/Off.
- Versatile search facility.
- Extensive User Manual.
- And many more features.

Special Price (UK)£149.99 including Postage & Packing.

28 day money back guarantee if not entirely satisfied.
When ordering, please state which scanner you have.



EMP
LIMITED



51 High Street . Portland . Dorset . DT5 1JQ . Tel (0305) 826900.
Despatched by return of post (subject to availability).
Main Dealer: Garex Electronics. Tel (0364) 72770 . Fax (0364) 72007
Dealer Enquiries Invited

I have been using my Yaesu FT-290 on c.w. for some time and recently it has been joined by a Belcom 120S returned to the 28MHz band. Both of these excellent rigs have what I consider a failing. I have, due to the lack of a suitable break-in facility, coupled with the inability to adjust the sidetone level when using headphones, on many occasions forgotten to operate the p.t.t. switch before using the key.

I decided that a control box to provide these functions and remedy this situation was the answer. To be effective the box in question had simply to plug into, and fit either rig when required. The results of these deliberations are shown in the diagram Fig. 1.

All the components are non-critical and the average 'junk-box' should provide most if not all of them. Even if all components are purchased the cost should not exceed £5 or so. The original was housed in a tobacco tin, though there are many small cheap plastics boxes available from the various suppliers who advertise PW

Setting Up

This should present few problems as the timing delay is adjusted by setting R4, so that the relay drops out soon after your over has ceased but not in between words at your operating speed. Then set R5 and the set's volume control to give a comfortable level of both sidetone and received audio. Layout diagram Fig. 2 shows a suggested layout in use. The leads should be taped together and marked to avoid confusion.

Happy keying
Ken Fisher GOLKX

WHAT A GOOD IDEA



Innovation Into Investment

We've always been proud of our authors and their work. Many readers are also 'budding' authors and now you can join in - and win £25 - by sending circuits and projects to 'What A Good Idea'. It's the ideal solution to the advice often offered by friends who suggest that 'You should publish that'!

Circuits - accompanied by the minimum of text - must be neatly and clearly drawn in ink.

Wherever possible the idea must be original, although your suggestion might be an significant improvement based on another idea, in which case you should always quote the source. All entries will be acknowledged. Send your entry, with your name and address, to: 'What A Good Idea', Practical Wireless, Enefco House, The Quay, Poole, Dorset BH15 1PP. More details on page 22 of PW October 1990.

Fig. 1


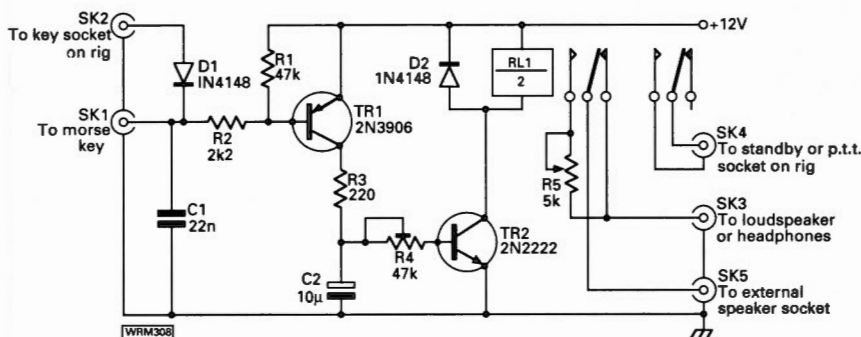


Fig. 2

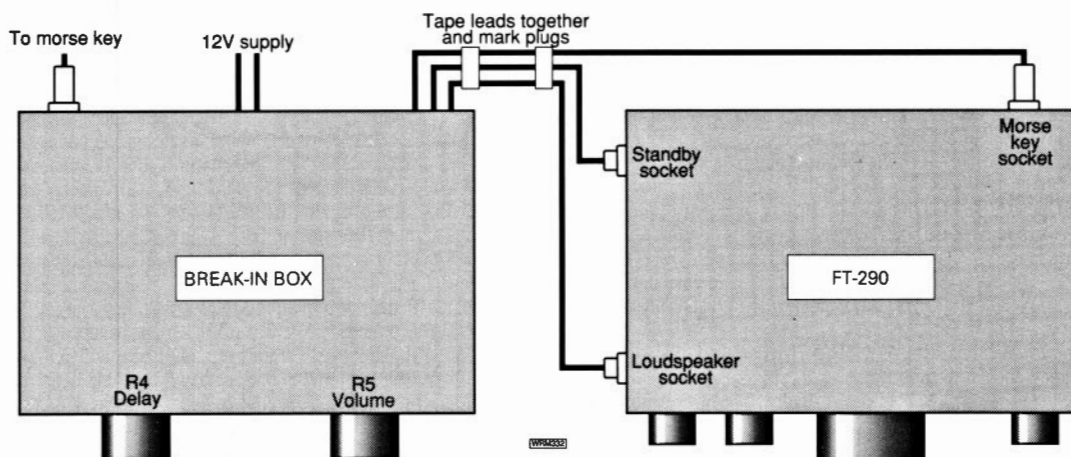

Back-Scatter

HF Bands

Reports to
Paul Essery GW3KFE

287 Heol-y-Coleg, Vaynor, Newtown, Powys SY16 1RA

The weather since last time has, one is sure, driven most southern amateurs out of their shacks; on the other hand, some of us were prevented from sleeping by the night-time heat and tried the shack instead. It's an ill wind.....!

Events

The main one has to have been the action of Iraq in Kuwait. Many of the Kuwaiti licensed amateurs were in fact members of the ruling Al-Sabah family, notably of course Prince Yousuf Sauf Al-Sabah 9K2CS, who led the 701AA operation. *DXNS* quotes unconfirmed reports from Kuwait that he and others of the family died in the invasion. We hope this is not so.

Iris and **Lloyd Colvin W6QL** and **W6KG** are on their travels again. First stop is a month as 5H0KG, in the shack of 5H3TW; other proposed stops include Mozambique and Madagascar, albeit they do not at the time of writing - last week of August - have licensing nailed down in either place. Don't forget that Iris often operates in the DX nets, as an exercise in completing 100 countries from every stop. Incidentally they were awarded the title of 'Amateur Radio Ambassadors of the Decade 1980-1990' by the ARRL Board.

You reckon your club can put on a 'Biggie' for a contest? How does it compare with the forthcoming Finnish effort as PJ9W (s.s.b.) and PJ9A on c.w. for which some 55 operators and 40 support personnel are all headed for Curacao?

Y9QANT is at the Georg Forster research station, which counts for DXCC purposes as Antarctica.

Thought

One of the most useful things the technical fraternity could do for h.f. radio of all sorts is to devise a more satisfactory method of combating static, particularly when using a.g.c. This is one area in our hobby where digital methods in the receiver have some promise.

More Snakes

Last time we mentioned the letter from K6EIL on this. Immediately the copy had gone (Sodde's Law again!) in came a letter from DA4MU, enclosing a photocopy of another article by the same author; in this version, the far end of the coaxial cable is shorted and of course sealed, and the braid is left open-circuit at the home end. Either way (April '88 *QST*, or July '90 *Monitoring Times*) the idea seems to have merit for noisy bands or locations.

Conditions

Dominated by summer static, alas. As this is being written I am just recovering from a couple of flares - and the audible signs of a thunderstorm to add a smidgeon of extra flavour! Interestingly enough there is a very sizeable proportion of amateurs who consider the sunspot cycle this time to have totally failed to live up to its promise. One reason possibly could be the higher

level of QRM due to greater numbers and higher power; many of the OTs won't use the attenuator and so suffer desense problems. However, one begins to wonder whether man-made atmospheric pollution rising into the ionosphere and changing its nature to a less ionisable nature might have some bearing on the problem.

Reports

Let's make a start with Top Band; just one reporter, namely **G2HKU** (Sheppey) who comments that he managed his regular s.s.b. QSO with ON7BW - with difficulty! It seems that ON7BW can hear Ted OK on his Beverage antenna, but that G2HKU's reception is made very difficult by the static. One wonders whether a frame for receiving, plus a pre-amp might be the answer.

I have been on the band a couple of times but frankly the noise level noted on each occasion was enough to try the power of a saint. Thus, nothing much was raised apart from the odd local.

The 3.5MHz Band

GOKRT (Welling) sticks to QRP c.w. at the one watt level; up aloft he has some 25m of wire, worked against a quarter-wave counterpoise. Two-way QRP contacts were made with G0MLB, G3BWW, G3IVF, G3NSA and G4RGN, while other stations raised included G0BFU, G0MOU, G3GZN, G3KVT, G3MCK and G3WQ. Interestingly, notes that before he had his ticket he used to Howes d.c. receiver on the band, and used regularly to hear the W and VE stations on s.s.b., either late at night or just before dawn using just a simple 10m wire antenna.

Turning to **GM3JDR** (Aukengill) Don managed a c.w. QSO on the band with 7Q7CW.

3.5MHz c.w. for **ON7PQ** (Kortrijk) meant DF2UU/TF and J49G.

Again, the columnar rig has been activated on 3.5MHz s.s.b., but only on Sunday mornings for the club net; and between the QRN and the QRM from tuners it was hard going. If ONLY the rig instruction books would tell people just what frequency they radiate on when tuning-up, and warn them to avoid generating QRM from this cause life would be so much easier - much of this nuisance is done by people who just don't realise what they are inflicting on others.

The 7MHz Band

Another band well coated with noise - but the addicts still manage to find DX to turn we ordinary mortals green with envy!

For **GOJBA** (Sittingbourne) the s.s.b. signal gave him CT4NH, GSOAYR/P, LZ1KVZ, OH1AF, UB5ILA, UL7LBI, YU4JHI, and lots of G, GW and GM signals.

The letter from G2HKU has a few comments about the 'north of Watford' types - we'll deal with him later! - but as far as the band was concerned Ted mentions UA9CM, PT7ASQ and QJ0/N7BG.

Even GM3JDR seems to have been inhibited from his usual level of activity, but Don does note c.w. with DL8CSM/ZS1, UJ8JKV, LU5DG and 7Q7CW.

For **GW0HWK** (Wrexham) the band has yielded entries in the log for HJ3MCM, UA6HSW, TM1BRE (Brehat Is), GM0ENN/P, EI2GY, DF9KG, FD1DIH/P, IV4CIH, UL2LEG, G0AFG, G0MZO and G0DMZ.

As always, c.w. at ON7PQ; Pat mentions TI9CF, BY5TS, DF2UU/TF, 6W6/DL7FT, ZD8Z, K3XJO/LU, 5H3TW, 708AA and 7Q7CW.

Contests

For those who like 'em, warning to prepare; for those who don't, notice of the weekend reserved for domestic chores!

October 27-28 is the date for the CQ WW SSB DX contest, while November 3-5 is the ARRL CW Sweepstakes; leaving November 10/11 for the OK DX Contest - a bit too near home for comfort, this one! November 17/19 is the ARRL SSB Sweepstakes, and November 24/25 the CQ WW CW DX.

10, 18 and 24MHz Bands

No, not a riddle, our newest bands - though to be sure a large proportion can't even recall the time when we didn't have them. Come to think of it, I wonder how many are still around who can recall clearly that wonderful first few hours on 21MHz?

Anyway, to the meat. G2HKU found, on 10MHz, SM0CCE, ZM2AGY, W2BA, ZM4HB, DL7CY, N4EJK, SM5AUK/6; on 18MHz 4S7WP, KB2IIQ, K4II and W2BA; and on 24MHz, no mention.

For **G3NOF** there wasn't a lot on 18MHz, although Don did raise RA3GI and 4U1ITU; while on 24MHz the only offering was PJ6/KV4AD.

Now to **G4ZZG** (Mansfield), who notes that his postcode ends with the magic '0DX' and reckons the postcode is true at that! This, alas was after he had twice waited through four earlier QSOs with 9M2FS only to have the chap go QRT before Charles managed to get in. On the other hand, 18MHz did stump up with OJ0/K5VT, TA7/KU0V, FG5ED, PY1BVY, JA5IU, JA7AB, WB4TBG plus Europeans and UD6DKW, UM8MBA, RV0YF. Incidentally Charles was a happy lad when he posted his letter to the column, as he had just received his ZS8MI QSL that morning.

Now to GW0HWK; on 18MHz Mike found VO1BD, KC1NO, VE2HRP, W3PLM, RW9FW, KD3SM, W5FT, HL1UA, A92BE and a gaggle of Europeans to fill up the

logs. As for 24MHz, GW0HWK mentions TA0B, TA2/VE3NSK, A92BE, JA6BSM, K1ZFE, 4X6ZS, and of course again the EUs.

Turning to ON7PQ, Pat tried all these bands, and his log includes 7Q7CW on 10MHz, plus 7Q7CW, 9V1YB, TA1/KU0J, EA9EO, 8R1/W1CDC, and PA0GAM/ST2; while on 24MHz the yield was 7Q7CW plus EA9EO.

It was nice to have a chat about old times with **G3VWC** (Bath), who nowadays commutes to the 'Great Wen' by HS125 train daily. He still found time though to raise JA1ITX, JA1UQP, JA4AO, JA7DJO, W4TG, W4EIN, AB4CA, W5VBT, W6FAY, K7ZR, VE4LY, VE7SR, 4S7WP and JW/DK2OY.

A new reporter is **John Bell G3JON**, from Sheffield, who says that reading the piece each month at least makes him realise what he's missed! On the other hand, John did manage to latch on to JA4AO, VK5VN, VK4CEK, VK3AHJ and 8P6FV. The G3JON antenna incidentally is the Windom design from the April *PW* 1990 issue; although cut precisely to the dimensions quoted in the article, G3JON gets different results, but, as he says, it works very well on 18MHz. Incidentally, John's operating time is usually around the 2200-2359 clock-time.

Now we turn to 9H1IP, (M'Scala, Malta) who managed on 18MHz to locate OM1IAI, HB0/DK8ID, XE1VIC, A45ZQ, C6AFR, CM3EF, Y03APJ, ZL2UW, NH6C (Hawaii), VK3CTT, TR8CJ, 5B4ES and RB5WA/RB9P, with the nicest surprise being WZ6C/ST4 back to a CQ call! Gotaways included V63AY and 3X1AU. Turning to 24MHz, conditions kept the count low, but T77T, A92BE, Z21CS, A22JP, K8LF/4, OA8BT, ZL3DC, KF3T and WB3JRU, the last five all coming in one session on July 27, between 0256 and 0340UTC. Since then it has been a matter of keeping fingers crossed for conditions to lift a bit.

Geoff Watts

Geoff has had to raise the price of his various lists, for UK customers to £1.25 for the double-sided, or £1.50 for the single-sided version, (the latter is handy for mounting up on to card, or under glass on the operating surface). The lists include **1.** the *CQ and ITU Zones Guide*; DXCC countries in each zone, arranged by prefix and including all the other prefixes and special prefixes for that country. **2.** The *USSR Oblast Guide*, in numerical and in prefix order. 7 maps, USSR Awards, CQ-M Contest, R-150-S Countries List, Victory-40 Stations, CQ & ITU Zones, deleted oblasts future USSR prefixes, and 250 USSR QSL Bureau addresses. **3.** the *DXCC Countries Guide* lists the DXCC countries alphabetically, present and past prefixes back to 1945, IOTA references for all islands on the IOTA list and a six-band DXCC/IOTA QSL log. **4.** is our dear old friend the *Radio Amateur Prefix-Country-Zone List*, arranged by prefix. Everything for each country on one line, normal prefix, special prefix, ITU call sign block, continent, DXCC status, CQ and ITU Zone number, and obsolete prefixes used in the past ten

Back-Scatter

years. Each list is 14 or 15 pages long and only obtainable from Geoff Watts, 62 Belmore Road, Norwich NR7 0PU. Note, overseas prices are held for the moment.

The 14MHz Band

Space closes in apace. G2HKU mentions UA4/N7KZN, PJ9Y, and PY5BVL.

G3NOF (Yeovil) noted little from the Pacific, but did have s.s.b. contacts with ED5PIH (Homegas Is), JU750BV (JT1BV), KL7XD, TI9US, U3V/U29SWR, VKs, YB8RB, YB0DD, YK1AA, ZK1XY, 7Q7LA, 9M2ZZ and 9M8FH.

It was all c.w. on 14MHz for GM3JDR, who connected with 4K30DX, 4K3/UA3CYA, 4K3PA, 4K3MI, 4K3PWB, 4K2PGO, UA0HAE/UA0K (Wrangel), G4MYG/ST2, VU2SU, KP2/JP1DMX, TR8JLD, HK3AHM/1, VS6VW, JW/DK2OY, TE2T and 'scads' of JAs.

Now GW0HWK; his crop included ZF2NT, V290A, HK0TCN, 9M2CW, 7X2DBN, 6W1PZ, PT2BRA, A92FB, PP8VHL, N4LAW, J39B0, JU750BG, plus US, Russian and EU stations.

The c.w. from ON7PQ came to terms with TI9CF, RZ10A/A for IOTA EU-66, HB9IQP/5B4, VE2DWC/CIOGI, JW/PA3DCO, PJ9Y, OJO/N7BG, V2/AA60G,

JU9G, DF2UU/TF, V63IK, 6W6/DL7FT, C56/DL7FT and OA4ZV.

GOJBA (Sittingbourne) brings up the tail with a collection on s.s.b. including IK0GDH/IH9, UZ6LY and W2, W3 and W4 call areas.

The 28MHz Band

GOJBA stuck to s.s.b., and raised DL8SDN, EA5DLD, ED9ICM (IOTA AF36), FD1CMT for a 30-minute contact at 0030UTC, HA8BI/5, HB0/ON4KST, LY3BAQ, LY3BE, RB5EKW, TK/IK4GRO, UB5WJ, Y23RO/A, 708AA and 9H1EL.

Turning to ON7PQ, Pat notes 708AA, Y11BGD, TR8JLD, 5H3TW, VS6BG, 7Q7CW, YK1AO, FH5EJ and C56/DL7FT.

GW0HWK mentions F6EZV, IK0OEF, EA3FST, G0NOR and FR5DX.

Just one s.s.b. contact is noted by GM3JDR, who worked YC2NFA.

The G4ZZG log includes c.w. to 6W6/DL7FT, I2DMK/IY1TYH, and, in response to a CQ on a 'dead' band, JQ3QYL.

G3NOF noted lots of short-skip on the band, and strange conditions; Don had QSOs with FR5ZN and 708AA.

G2HKU seems to have found the decent openings, as he managed LU3EW, CX4SB and ZP6XDW.

The 21MHz Band

Probably the best of a job lot! G2HKU notes BV2DA, UMBMK, YN1CC, VP2EXX, PY2ZEB, VP5VPX, and HC5AI.

This is obviously G3NOF's favoured band. Don made it across to BV2FB, BY4AA, BY5QW, C56/DL7FT, CT0BI, DF2UU/OY, DU8USK, ED5ICE, EK9QRP, F00IGS, FR5DX, GM/DL1SCQ (IOTA EU 12), H44RW, JAs, JW/PA3DCO, HK6DOS, HL1KII, HL9KL, HP6AW, HR1RMG, HV3SJ, HZ1AB, KJ8M/P/COH (IOTA NA67), P29BT, P29NMD, R3D/RA9SB, SV9/DL8YEF, U9W/KA6ZYF, UW9W/W6/G3MHV, UA0QBK, UL0ACI, UL0GE, UL0LYA, UL0OB, UM8MGO, VP9CB, YBs, YF0CHA, ZB2AZ, ZK1XY, 4K4/EK9JG, 5B4ZL, 5Z4BI, 8P6AD, 9M2SH, 9V1YC and 9Y4IBN.

The s.s.b. of GM3JDR went to YB20K, UA0BCJ, UA0X/RB4ES, XX9KA, but the c.w. was more popular, with UA0FZ, UA0IBB, UA0LWC, 7K1FFG, VU2TTC, HL1CG, HL1XP, 4K3PWB, XX9KA, UJ5K, 8J90XP0, F6GCP/BV, BZ4RA, BZ10K, BY5RA, VP2VI, JA9AIX/JD, HL3EIE, HL4CHH, JT1KAA, JU6750BR, KH6IJ, and HK1HHX.

GW0HWK; HL2KAT, JA7SN, YC3JVB, 4K4/EK9JG, JA1XLL/7, A61AD, 4X4SO, GX3XRO, 6W6/DL7FT, C56/DL7FT, S01A,

6Y5DA, ZL4JO, 5Z4BP, 9H1EL, A41KY, G4OUK/MM (Indian Ocean), RLOPYL, GDOBCR/MM (off S Turkey), UL0OB, UL0GE/A, BZ4RDX, ZC4MK, lots of Americans and the odd EU.

ON7PQ also has a long list: 9M2FB, 4K4/UA6WCG (IOTA AS-63), SV9/KM8M, H44RW, TI9CF, VE2DWU/CIOGI, VK9NS, J49G, 708AA, 4K4/EK9JG, ED5ICE (EU 69), 8J0BSJ, 9V1YB, A22AA, 3B9FR, WA6EMV/KH6, 3V8/C31WW, JU750BR, V73AZ, 7Q7CW, TR8BY, Y90ANT, SV5/SMOCMH, and YU400/4U.

Finally, GOJBA, who found BY5QW, ED9ICM (Chafarinas Is), KH2/JP1UEE, N4CVR and K4LHE.

Late Flash

Too late for total inclusion was the letter from G3BDQ; but I couldn't help but note why the JU750 stations were on... 750 years on from Genghis Khan - blimey!

Deadlines

Addressed as above, and to arrive by November 5 and then November 30 to take the Christmas posting rush into account. Please try not to be late!

Solar Data for August 1990

The end of July finished with an aurora and magnetic storm on the 28-29th. There was a major flare on July 30, lasting for 3 hours but nothing came of it. The restructuring of the solar surface now seems to be complete. There was very little solar activity during the period but the spot count increased reaching 234 by August 12. A major flare occurred at 1415UTC on August 13. Spot counts continued to climb and by August 18 had reached 394, the highest daily count since September 1989 and just short of the highest level recorded this cycle, 16 May 1989, when it peaked at 401. The latter part of August saw some very disturbed conditions giving rise to auroral activity. The geomagnetic A index was up to sub storm levels of 35 on August 22, 42 on August 23 and 48 on August 26. A number of flares were reported throughout this period with a type X3/2B occurring on August 27. August 28 was the only quiet day, with a geomagnetic A index of 6 units.

The latest predictions for Solar Cycle 22 places the maximum as July 1989. If this is correct it means that it is the shortest cycle rise ever recorded - 34 months. It will take a massive rise in solar activity to change this and so far there is no sign that this will occur.

The 50MHz Band

Although Sporadic-E was still prevalent during August, the addition of the Perseids meteor shower at the beginning of the month and some good auroras during the

Back-Scatter

VHF Up

Reports to

David Butler G4ASR

Yew Tree Cottage

Lower Maescoed, Herefordshire HR2 0HP

latter part of the month allowed much inter-European activity. It was a pity however that so many operators still operate within the DX window, 50.110-50.130MHz, when working European stations. It was made even worse during August by some stations attempting meteor scatter QSOs on 50.110MHz. I don't believe that it is a simple case of operators not having a copy of the band plan to hand but if this is the case, you can always send me an A4 s.a.e. to obtain the latest IARU Region 1 and UK National plans.

Don't forget that the months of October and November are the most likely for an opening to VK. If conditions are right the band will be open around 0730-0930UTC. There are a number of ways to ensure working into Australia. You can take careful note of the state of the sun, observing when the noisy side is facing us and when the quiet side is within view. As a very rough guide you wait for the quiet side to face our way, add a few days for the geomagnetic activity to reduce to a low level and bingo, an opening to VK. A more

practical approach is to wait for someone else to work into VK in the morning and then find out on the grapevine in the evening that an event occurred. Assuming that the sun does not throw a wobbler, the band will be in exactly the same state the next morning and you can then work the pile up. In 1989 this is how I and many others accomplished our 6th continent. My records show that if conditions are undisturbed the band can remain open for up to 6 or 7 successive mornings before the noisy side of the sun comes into view again to disrupt the proceedings.

Looking for the county of Gwynedd? GW1SXX is now active from Caernarfon with a Trio TR9000, an RN Electronics transverter and 15W to a MET dipole. His first contact on the band was with GD4IOM (IO74) at 1145UTC on August 9.

Another operator new to the band is Rhys Williams G7DEG (CBA). Since getting an FT-690, 15W amplifier and 5-element Yagi he has been having great fun working the stations around Europe. In his first fortnight of operation, Rhys worked 13

144MHz QRB Table
Distances in kilometres

Station	Trope	Aurora	Meteors	Es
G0CUZ	2943	1758	1996	2943
G0DAZ	2923	1780	2026	2923
G0DKM	2811	1488	—	2203
G0EVT	3080	1640	1808	3080
G0FYD	1315	1624	—	2019
G0ISW	1059	566	—	2057
G0LBK	3060	1755	1876	2350
G1DWQ	1454	1812	—	1836
G1EZF	1730	1757	1920	2375
G1KDF	3023	1421	—	2386
G1LSB	1319	733	1732	2723
G1SWH	3035	1429	—	2372
G3FPK	1835	1686	—	2337
G3LTF	1824	1846	2021	2174
G3SEK	1560	1681	1872	2154
G4ASR	2848	2029	2107	2853
G4DHF	1498	1530	2000	2448
G4JCC	1334	1158	1018	2173
G4MUT	1163	684	1533	2068
G4NBS	1321	1714	—	1901
G4RGK	1466	1757	1920	2375
G4VXE	2862	1446	1501	2880
G4YTL	1404	1774	2025	2172
G4ZTR	935	1535	—	2130
G8DER	1834	997	1957	2068
G8DZH	2924	711	—	2233
G8HCV	2880	1450	1912	2880
G8HKM	1304	1555	—	2265
G8LEU	2620	910	—	2430
G8HHI	1742	—	—	2058
G8JDX	2667	1368	—	2863
G8LTH	3070	1780	1868	2510
G8MFL	1209	1210	1329	2168
G8PYP	1240	1451	1479	2318
GD4XTT	3053	—	—	1700
G11JUS	3087	1614	1507	2216
G1BYDZ	1216	1809	1901	2562
GJ4ICD	1620	1100	2050	2090
GM4CXM	1428	1750	2100	2023
GM4YXI	3160	1881	2048	2513
GW4VXX	2823	1391	1313	1910
GW6VZW	2830	1473	—	2236
ON1CAK	1420	1166	1948	2725
ON1CDQ	1420	1166	1948	2124

countries, including OH0BNP (KP00) and 42 locator squares. He asks if there are any awards that he can start collecting for?

Back-Scatter

QTH Locator Squares Table

Station	50	70	144	430	1296	Total
G3IMV	310	—	440	125	51	926
G4ICD	407	—	263	119	59	848
G4ASR	279	43	350	41	3	716
G6HKM	263	—	224	112	48	647
G3JXN	204	22	187	134	88	635
G1KDF	258	—	183	104	37	582
E15FK	314	—	187	58	—	559
G0DAZ	146	—	221	137	39	543
G6HCV	309	—	233	—	—	542
G3UVR	—	50	257	140	83	530
G4KUX	—	—	372	120	—	492
G4RGK	—	—	284	124	50	458
G3XDY	—	—	206	148	91	445
G1SWH	195	26	158	59	—	438
G1DWQ	264	—	152	—	—	416
G0EVT	142	—	213	57	—	412
G4DEZ	55	—	249	49	49	402
G0LBK	—	—	260	89	46	395
G8ATK	103	—	145	94	52	394
G1LSB	73	—	176	144	—	393
G6DER	—	22	183	110	78	393
ON1CAK	48	—	280	53	11	392
G8LHT	79	19	185	93	14	390
G1EZF	—	—	263	93	—	388
G4XEN	—	—	274	111	—	385
G4MUT	82	22	153	93	31	381
ON1CQD	43	—	255	56	7	361
G4NBS	—	35	138	108	67	348
G4RRA	—	—	255	80	—	335
G3COJ	—	—	186	103	44	333
G8PYP	183	2	112	34	—	331
G8PNN	7	24	129	99	64	322
G4SSO	—	—	229	93	—	322
G4FRE	—	—	102	146	72	320
G4TIF	—	—	200	110	—	310
G4DHF	—	—	307	—	—	307
G4ZTR	78	28	120	50	30	306
G1EGC	—	—	198	80	23	303
G8HHI	—	—	148	110	38	296
G6MGL	—	—	141	89	59	289
DL8FBD	—	—	280	—	—	280
G0FYD	110	1	160	6	—	277
G0HQBK	111	1	142	15	—	269
GW6VZW	118	—	143	6	—	267
G4PCS	—	—	258	3	—	261
G6MXL	66	22	98	49	23	258
G3BDQ	256	—	—	—	—	256
G1GEY	—	—	188	77	11	256
G3NAQ	—	—	175	80	—	255
G6DZH	—	—	158	87	—	245
G6STI	—	—	152	69	24	245
G0NFH	113	25	78	18	9	243
G3FPK	—	—	241	—	—	241
G4IGO	—	—	238	—	—	238
G0EHV	—	—	160	75	—	235
GW4FRX	—	—	231	—	—	231
G4ACXP	—	—	198	31	—	229
G1SMD	165	—	110	—	—	275
G4DDL	—	—	216	—	—	216
G4MEJ	—	—	213	—	—	213
G8LFB	—	—	209	—	—	209
G6MKD	—	—	150	49	—	199
GJ6TMM	—	—	151	48	—	199
G4YCD	—	—	197	—	—	197
G1TCH	94	—	95	6	—	195
G11JUS	—	—	192	—	—	192
G8XIR	—	—	123	—	62	185
G7ENF	59	—	89	24	—	172
G4FYK	—	—	82	50	22	154
G7ANV	—	—	153	—	—	153
G4AGQ	—	—	104	42	1	147
G8XTJ	29	—	116	—	—	145
G6MEN	41	2	63	26	4	136
GW4VXX	10	—	117	—	—	127
G1WPF	—	—	97	29	—	126
G0FEH	—	—	101	24	—	125
G0ISW	45	—	59	17	—	121
GW1MVL	—	—	109	7	—	116
G11MM	—	—	98	17	—	115
G6OGDL	—	—	88	23	—	111
G7CFK	109	—	—	—	—	109
G1CEI	11	—	77	18	—	106
G14OWA	—	—	103	—	—	103
G7CLY	—	—	100	2	—	102
G1SWH	—	—	148	53	—	101
G6GJOL	—	—	88	—	—	88
GM1ZVJ	35	—	48	—	—	83
G4WHZ	—	—	76	—	7	83
G0GTF	76	—	—	—	—	76
G1NVB	—	—	73	—	—	73
G0HDD	—	—	64	—	—	64
G0HEE	—	—	73	—	—	73
GU4HUY	—	—	73	—	—	73
G2DHV	—	—	33	7	2	42
G7AHO	—	—	34	—	—	34
GW7EVG	—	—	21	—	—	21

No satellite or repeater QSOs
Starting date January 1 1975

The answer to that is Yes and already Rhys has, providing he can get the QSL cards, enough locator squares for one RSGB award. The 50MHz Squares Award requires proof that 25 squares have been worked. A similar award, the 50MHz DX Certificate requires confirmation of contact with 25 countries. Stickers are available for both of these awards in increments of 25. If you really want to find out more about what certificates are available I suggest you invest in the *Amateur Radio Awards* book written by Chris Henderson.

Gordon Emmerson G8PNN (NLD) managed to work a total of 18 squares this summer before deciding to dismantle his 50MHz station. He reports that despite having 50W on a QV06-40A amplifier and an HB9CV antenna he couldn't compete with stations in southern England. I assume Gordon is referring to the fact that conditions on 50MHz are generally better the further south you are located. He has now decided to stick to 70MHz and above.

Meanwhile **John Hilton GM1ZVJ** (LTH) is still plugging away at the band with his 2W to a 3-element Sandpiper Yagi. On August 1 he worked 10 German stations, IK2NCJ, OE5MSM, OE5WIL and PE1LYO, picking up 4 new squares in the process.

Ela Martyr G6HKM (ESX) reports that the band has had its good and bad days. One good day was July 28 when QSOs were made with a number of DL, I and OE stations. Included in this bunch was OE2CAL who has now been worked by Ela on 4 bands. In the evening of the 28th, 8 GM stations, including GM1YZW and GM3JJJ, both in IO68, were worked via aurora. Conditions during August remained quite good, OH0BNP and SM6FZD (JO57) being worked on the 2nd and FC1EAN/EA3 (definitely dodgy), HB0/HB9QQ (JN47) & F/G6LZO (JN13) being found on the 11th. Two more new countries were notched up on August 12 with G4ODA/TF (IP03) and Y02IS (KN05). A late night Auroral-E opening, on August 21, gave Ela another country, in the form of OY/G4ODA (JP62). In an aurora on August 23, contacts were made with DL8HCZ (JO53), GD3AHV and GM1POA.

At my QTH, activity during August was considerably quieter than previous months. Even so there were still a few juicy morsels to be found. The very rare DXCC country, The Sovereign Military Order of Malta, 1A0KM was worked on s.s.b. via Sp-E on August 1. The same mode provided OH0BNP Aaland Island on August 2 and a late night opening, on August 4 at 2219UTC, found 4U1ITU (JN36) on c.w. Following an abortive m.s. schedule, on August 5, with G4ODA/TF earlier in the day, I was fortunate to catch the group at 2040UTC booming in on s.s.b. via Sp-E. This mode was still prevalent on August 11 allowing many operators, including myself to work HB0/HB9QQ in Liechtenstein for a new country. Using meteor scatter I worked HB9STI (JN46) in 8 minutes on August 12. He was using 10W of s.s.b. and a 5-element Tonna Yagi.

John Heys G3BDQ (SXW) found a fair bit of DX amongst the more normal

Annual v.h.f./u.h.f. table
January to December 1990

Station	50MHz		70MHz		144MHz		430MHz		1296MHz		Points
	Countries	Countries	Countries	Countries	Countries	Countries	Countries	Countries	Countries	Countries	
G6HKM	52	35	—	—	63	22	34	13	27	10	256
G1SWH	42	31	32	6	77	14	38	8	—	—	248
G4ASR	18	35	48	8	48	31	—	—	—	—	188
G0IMG	44	29	40	4	49	12	32	4	—	—	214
G0NFH	40	20	21	3	48	9	11	2	2	2	158
G0FYD	20	24	1	1	75	20	11	4	—	—	156
GD4XTT	31	18	—	—	73	17	10	4	—	—	153
G6MXL	5	17	17	3	34	9	17	5	13	4	124
G8PYP	19	23	1	1	42	13	21	6	—	—	126
G0EVT	21	23	—	—	36	14	5	1	—	—	100
GW4HBK	2	12	39	7	—	—	29	4	—	—	93
G4ZTR	—	—	—	—	59	19	—	—	—	—	78
GW1MVL	2	2	—	—	43	10	11	2	—	—	70
G7CLY	—	—	—	—	60	9	—	—	—	—	69
G4SEU	—	—	62	6	—	—	—	—	—	—	68
GW7EVG	—	—	—	—	29	6	—	—	—	—	35
G7CFK	18	12	—	—	—	—	—	—	—	—	30
GM1ZVJ	1	9	—	—	2	1	—	—	—	—	13

Annual c.w. ladder

Station	Band (MHz)				Points
	50	70	144	430	
G00ELY	12	—	144	—	156
G4OUT	—	39	99	—	138
G4ASR	34	4	97	—	136
G0FYD	31	—	62	1	94
G0JJA	17	—	10	—	27
GW4VXX	3	—	9	—	12

Number of different stations worked since January 1 1990

European stations. On July 31 he got SV1AB, SV1DH and Y02IS. It was the turn of the Faroe Islands on August 1 with OY6FRA and OY7ML being worked around 1830UTC. A number of OEs were worked on the 2nd along with OH0BNP and SV1DH. An unusually early opening to Africa occurred at 0826UTC on August 5 with Mal Z23JO being worked on the key 529 both ways. The band was open at this time via Sp-E to France and Italy. A new country, LX1JX was worked at 1730UTC, presumably via a long meteor burst but very welcome all the same. Zsigy Y02IS was heard again, at 1050UTC on August 13. The aurora on the 23rd, around 1500UTC, found GD3AHV and GM4UPL whilst later in the day, contacts were made via Sp-E with IK1LGV, IZFWH, IZJSB, IK3QIF and IK5ME bringing John's total of Italian squares up to 28.

Jim Smith G1DWQ (DOR) mentions that August was an interesting month with tropo, aurora, t.e.p. and some good late season Sp-E. The month started tremendously with OH0BNP, OY6FRA and 1A0KM being worked between 1530-1830UTC on the 1st. There were openings via Sp-E on August 2 & 4 allowing many contacts to be made with stations in DL, OE, OH and SM. Kosie V51E was heard between 1630-1700UTC on August 8 peaking 55. On the 11th Jim caught a good Sp-E opening between 1330-1930UTC, working strings of DL, I & OE stations, the prize being HB0/HB9QQ at 1706UTC for country 59. IZADN/8 was worked on August 12 from JM79 and from JM88 on the 16th. Jim heard a number of DL stations, between 1500-1600UTC, in the aurora on August 23 and some DL, F and I stations via Sp-E from 1600-2030UTC. Another aurora, on August 26 between 1500-1830UTC, was a weaker event but later from 1915-1945UTC a number of SM stations were heard via auroral-Es. Sp-E was prevalent on August 26 from 1000UTC, the band being open to 9H, I and SM.

The 70MHz Band

Thanks to a few portable stations operating from rare locators, the band was made that more interesting during August.

Dave Lewis GW4HBK (GWT) managed to work EI2VPX/P (IO61) on August 4, G4ZFK (IOW) on August 7 and

G4VIX/P (IN79) on August 11, all stations via tropo. Dave also made some good QSOs with Charles EI9FK/P contacting him in IO53 on August 11 and IO44 on August 12. These two contacts were made via meteor scatter as was a QSO with GM1SMI/P (OKE) on August 13. Later on the 13th, GM3WQJ was heard calling CQ MS but no contact resulted.

I took time off the other bands to work EI2VPX/P & G4ZTR/P via tropo and EI9FK/P (IO44) & GM1SMI/P (IO89) via meteor scatter. The Irish station was worked in one long burst whereas the Orkney Island contact required 12 bursts and 28 minutes to complete.

The 144MHz Band

A number of operators have commented on the reduced number of Sp-E openings this year. It is very difficult to generalise by using the number of stations worked as data, but my records show that in 1988 I made 173 QSOs in 11 countries, in 1989 I made 79 QSOs in 9 countries and this year I only managed 35 QSOs in 4 countries. Contacts during this 3 year period were predominantly to the south-east of the UK, with 97 QSOs being made with Italy, 78 QSOs with Yugoslavia and 38 with Hungary.

During August there was much activity on the band via tropo, aurora, Sporadic-E and meteor scatter. The latter two modes will not be so prevalent in the next few weeks but you should be able to work some good DX during the autumnal tropo season and via aurora.

Gary Nicholas GW7EVG (CWD) reckons that tropo conditions have improved recently. Contacts made during July included GM3ZME/P, GM6SPS/P and GM90CC. On August 7 he managed to get his 3W signal across to EI2VPX/P (IO61). Gary was also pleased to work GW1PXM/

PHOTO ACOUSTICS LTD

58 High Street, Newport Pagnell, Bucks. MK16 8AQ.

Telephone: 0908 610625

FAX: 0908 216373

AR-1000 HANDHELD SCANNER



Basic Spec.
Freq. ranges:
8-600MHz and 805-1300MHz
Freq. selection:
By direct keypad entry or by tuning knob on top panel.
Mem. channels:
1000 arranged conveniently in ten banks of 100, with direct keyboard access to any memory.
Reception modes:
AM, FM (narrow) and FM (wide).

RECEIVER COMES COMPLETE AND READY TO GO

ONLY £249.00 + P&P £4.50

NEW - AR-3000 - NEW YES IT'S FINALLY HERE!!

The AR-3000 Wideband Receiver is now available.




Basic Spec.

Freq. range:
100KHz to 2036MHz without any gaps.
Reception Modes:
LSB, USB, CW, FM (wide), FM (narrow) and AM.

Mem. channels:
400 memory channels in 4 banks of 100.
Freq. selection:
By direct keypad entry or by tuning knob on front panel.

ONLY £765.00 + P&P £6.00

ICOM IC-3220E Dual Band Mobile

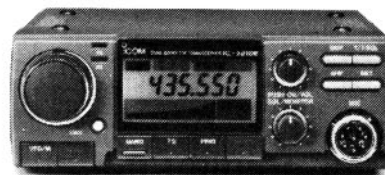

- ★ Cross band full duplex operation
- ★ Dual watch facility
- ★ IC3220E has 25 watt output on both bands
- ★ IC3220H has 45 watts on 2m and 35 watts on 70cms

IC-3220E = £499.00

IC-3220H = £565.00

Carriage = £6.00

ICOM IC-24ET

Icoms New Mini Dual Band Handheld for 2M & 70cms.



Features:

- ★ Full Duplex
- ★ 5W output on 13.8v
- ★ Up to 80 memory channels
- ★ Dual Band display
- ★ CTCSS option available
- ★ Compact and lightweight
52(w) x 136.5(h) x 34.5(d)

ONLY £385.00 + P&P £4.00

STANDARD C528



Features:

- ★ Full Duplex
- ★ 5W output on 13.8v
- ★ Dual Watch facility
- ★ Dual Band display
- ★ 144-146, 430-440 and 800-975MHz Rx only
- ★ CTCSS option available

ONLY £379.00 + P&P £4.00

STOP PRESS!!! NEW PRODUCT INFORMATION

KENWOOD TH77E DUAL-BAND HANDHELD

FEATURES:

- ★ World's smallest Dual-Band Transceiver. 58mm (W) x 140.5mm (H) x 29.5mm (D)
- ★ 5 Watts RF output when operated on 13.8 or with PB.8 Nicad.
- ★ Dual receive function with dual displays.
- ★ Built-in 2 VFOs for main and sub-bands.
- ★ Remote control speaker microphone option.
- ★ Selectable and full Duplex-cross band operation.
- ★ Dual squelch controls.
- ★ Built-in dual tone squelch system (DYSS).
- ★ Piger function.

(Loads more features available, send, phone or fax for leaflet)

PRICE £398.00 (includes Nicad Pack & Charger).

P&P £5.00

Demonstration Disk available on 5.25in Disk

Cost = £5.00 + £1.50 P&P

NEW WX1700 METEOSAT WEATHER SATELLITE SYSTEM FOR IBM AND IBM COMPATIBLES

WX-1700 System consists of:

- ★ Outdoor unit with a complete weatherproof Meteosat Receiver
- ★ Indoor unit, containing the power supply and necessary remote controls
- ★ Interface card for an IBM or IBM compatible computer
- ★ Software to produce high definition images on your PC (EGA or VGA)

NOTE: All you need in addition to this is a Dish antenna and your PC!

FEATURES

- ★ You can receive both Meteosat Channels!
- ★ Will operate on any IBM (or compatible) MS-DOS Personal Computer (XT or AT)
- ★ EGA or VGA colour images (automatic selection)
- ★ Extreme high definition: 800 x 600 pixels with VGA
640 x 350 pixels with EGA
- ★ Colours: 256 colours out of a palette of 250,000 colours in VGA (512k) 64 colours with EGA
- ★ Will decode ALL polar orbiting and geostationary weather satellite signals
- ★ Will also decode HF facsimile stations (FM to AM convertor needed)
- ★ Can store at maximum of over 200 lines per picture
- ★ Animation of up to 99 stored pictures!
Various separate animation sequences possible
- ★ Picture Save and Load
- ★ Zoom in and Out
- ★ Picture shift in two directions (centering) etc.
- ★ Temperature indication of predetermined places and/or any desired place on infra red images!
- ★ Moisture distribution shown on WV (Water Vapour) images
- ★ Automatic colouring of Europe (on D2 chart)
- ★ City names indicated on screen (maximum of 40 programmable with coordinates)

THE BEST FEATURE IS THE PRICE!!! ONLY £575.00 inc VAT Carriage £7.00

Note: We can also supply Dish antennas complete. Prices are as follows:

B5cms Dish = £199.00 inc. VAT

100cms Dish = £225.00 inc. VAT Carriage on Dishes = £15.00

AUTHORISED AGENTS FOR KENWOOD, ICOM, YAESU & STANDARD. FULL SERVICE FACILITIES AVAILABLE

SPEND UP TO £1,200 INSTANTLY WITH A PHOTO ACOUSTICS LTD, CREDIT CHARGE CARD — APPLY FOR DETAILS

PART EXCHANGE WELCOME, ASK FOR KERRY G6IZF OR ANDY G4YOW

RETAIL SHOWROOM OPEN MONDAY-FRIDAY 9.30-5.30, Saturday 9.30-4.30

Goods normally despatched within 24 hours. Please allow 7 banking days for cheque clearance. Prices correct at time of going to press — £80E



Practical Wireless, November 1990

P (DFD) over a very obstructed path. On August 19 he worked G7IAC/P (NLD) for both a new county and locator square.

John Hill G7CLY (HBS) managed to catch EI2VPX/P, GB2XS (HLD) and GM0LVI (TYS) all on tropo at the beginning of the month. On August 12 at 1010UTC, he heard G4PIQ/TF (IP03) via meteor scatter.

G6HKM picked up an unexpected square on July 26 when she worked GW0KZG/MM sailing through IO60. An aurora, on July 28, coincided with the 144MHz QRP contest, allowing Ela to work a number of stations including G4IKIS and GM1YZW. The early part of the Sp-E opening on August 1 was missed but even so s.s.b. contacts were made with EA7ALL (IM87), EA7BVD (IM77), EA7ERK (IM77), EA7GIF (IM87), EA7RO (IM76), EA7ZM (IM76) and Mark ZB0T for a new country. Tropo conditions were good across the North Sea on August 26 allowing several OZ stations to be worked.

Keith Killigrew G6DZH (HWR) reports that Sp-E and tropo conditions have been very poor this summer. Contacts via Sp-E have included EA7AH, EA7GAA and EB7BQI on June 4 and EA6PS on August 1. During the evening of August 9, EA1TA (IN53) was worked via tropo. An aurora on August 21 found GM6OWX/P in IO88, the last UK locator square for Keith. Another event on August 23 gave s.s.b. contacts with DB6DX (JO32) and GM80EG (IO86).

Dave Law G0LBK (YSS) made the best of the recent good tropo conditions by working HG6VV (JN97) and OK2MMW (JN89) on July 13, OK1DDO (JO60), SP6GZZ (JO81), SP6TRQ/P (JO71) and Y26CI (JO50) on July 22, and OK1IBL (JO60) on August 2. Prior to the peak of the Perseids meteor shower, on August 10-11, Dave worked I2FAK and W5UN on e.m.e. During the shower he only managed to work HG3DXC, IW5AVM and SP2NJI but puts this down to the fact he got married on August 11. Congratulations!

I found this year's Perseids meteor shower to be quite good, especially the amount of random operation on 144.400MHz. Completed scheduled contacts included DJ3VI (JO51), G4YTL/TF (IP03), HG3DXC (JN96), OH2TI (KP20), OK1DXR (JO60), SM5DCX (JO89), YU2CCY (JN85), YU3JY (JN75) and ZB0T (IM76). Random s.s.b. contacts were made with HG2NP (JN97), I3LGP (JN65), I5JUX (JN53), LA6CL, LA9ZV, OH1AF, SM4CSO, SM5CHK (JO78), YU1EV and YU2CBE (JN86). Earlier in the month, on August 4, tropo conditions were good to the south, allowing s.s.b. contacts to be made with EA1DKV and EA1WZ (IN53).

John Lincoln GM0JOL (HLD) mentions that he is still QRV from IO88 square. In recent months, c.w. contacts via meteor scatter have been made with DL1GBF (JN48), DL3RBH (JN68), G0GMB (IO92), SM2CEW (KP15) and SP6GZZ (JO81). John can usually be found on c.w. when auroras are present. During such an event on June 14, QSOs were made with DF5DE (JO40), DK9OY (JO52) and ES2XM (KO39). On July 28 another aurora produced contacts with DL, PA, G, GM, GW0KZG/MM (JO12) and OK1IBL (JO60).

The 430MHz and Microwave Bands

Thankfully the major expedition groups still take 430MHz equipment out with them on their trips to rare squares. With a number of such groups out in August and an improvement in tropo conditions there was much for the dedicated u.h.f. operator to work.

Dave GW4HBK made it across the water to EI2VPX/P on August 7 and to G4ATA/P operating from The Lizard (CNL) on August 14. On the previous day he heard the club station GD4IOM but was unable to attract their attention.

Paul Brockett G1LSB (LCN) has been doing particularly well in the recent 430MHz tropo openings. On July 15 he worked DG9BAX (JO43), LA1BM (JO29), LA1YCA (JO38), LA5KO (JO48), OZ1KLU (JO46) and OZ7LX (JO55). A choice DX station OK5A/P (JO70) was contacted on July 21. Paul found conditions very good to Scandinavia on August 2, coinciding with their monthly activity period. Contacts were made with DL3LAB (JO44), LA1YCA/P (JO38), LA3DV (JO48), LA3EQ (JO28), LA3VW (JO48), LA8AK (JO38), LA9DI (JO59), LA9RAA (JO28), OZ1JPT (JO64), OZ1KLU (JO46), OZ2OE (JO45), OZ6HY (JO45), OZ7IS (JO65), SM4DHN/4 (JP70), SM4JHK/4 (JO69), SM4KRX (JO79), SM4KYN (JO79), SK6AB (JO57), SM6CEN/M (JO57), SM6JEH (JO68), SM6OEQ (JO58) and SM7LAD (JO65). Not bad for an evening's work.

G6HKM was also QRV on August 2, working 7 LAs, 3 OZs, 2 SMs and many PA stations. Four contacts were over 1000km. On 1296MHz, Ela worked her furthest DX ever, contacting SM4KYN (JO79) at 1193km. Ela reports that this was the best evening on the band since August 1988. The 1296MHz Trophy contest on August 12 produced 26 QSOs, the best without a doubt being GD4XUM/P.

Having dispensed with 50MHz, Gordon G8PNN was able to concentrate on 430MHz. He also found conditions excellent on August 2, s.s.b. contacts being made with DL2NO (JO43), DL3LAB, LA1YCA/P, LA9RAA, OZ2OE, OZ6CE (JO55), OZ6HY, SM6CEN/M, SM6OEQ, SM7ECM and SM7LAD (JO65).

VHF News

Negotiations by the RSGB have resulted in a number of improvements in licence conditions likely to come into force later this year. One of the major enhancements is that c.w. power is to be permitted at the same level as s.s.b. With 400W of r.f. at the antenna, modes such as e.m.e. will be within reach of many more operators in the UK without having to apply for a special research permit. Other weak signal modes such as aurora, field aligned irregularities (f.a.i.) and meteor scatter will

also take on new dimensions. Another change affecting v.h.f. operators is that, following my paper regarding relaxations to certain licence conditions, mobile operation and vertical polarisation will be allowed on 50MHz. It is hoped that this move will encourage the use of 50MHz for local f.m. nets, relieving some of the congestion on 70MHz. It is worth noting that there is absolutely NO provision for speech repeaters on 50MHz. Please don't start bolting the whips on your car yet or running QRO c.w. Wait until these improvements have been announced officially in the Gazette.

DX Information via Packet Radio

I think most of you have some idea about packet radio and how it functions even if you may have some misconceptions about the mode in general. This column is not the forum to discuss the politics of its usage but a recent development in this area has meant many operators have found an additional source of information for successful DXing on the h.f. and v.h.f. bands.

I refer of course to DX Clusters. Very simply, these clusters allow many operators, typically 100 or so on each unit to be connected, via packet radio, to a specialised data base. Users can access these facilities via the 50, 70, 144MHz or 430MHz bands, depending on local arrangements and each cluster can be connected together using the existing network. So, potentially the cluster network could have hundreds of like minded DXers connected together via packet radio. Once logged into the cluster, the user can make use of its many facilities. The primary function is for DX spotting. A user, having found a station worthy of note can announce it to all concerned. A typical message might read "50.121MHz VK8ZLX 59 PG66 LISTENING UP". All you do then is turn on the 50MHz rig and work the DX! The message, having been inputted into the system can then be manipulated by the data base facility. So, having got home late from work you can ask the system to list what DX you have missed on any particular band. **Fig.1** shows the 50MHz data received on my local cluster GB7DXC, at 1145UTC on August 12. It shows frequency, call sign, date, time, signal strength, locator and call sign of the station inputting the information. The facilities available are too numerous to mention in detail but the following areas may whet your appetite - WWW data, Solar information, MUF, Bearings, Sunrise and Sunset calculations, QSL details, mailbox facilities etc. At the beginning of August there were four clusters operational in the UK, GB7DXC in Gloucestershire, GB7DXI in Berkshire, GB7WDX in Devon and GB7YDX in Yorkshire. Why don't you try it? It's what packet radio has been waiting for!

50128	G4ODA/TF	12-Aug-1990	1142Z	54	IP03	(G7BPX)
50128	G4ODA/TF	12-Aug-1990	0927Z	59	IP03	(G3COJ)
50110	LU8YYO	11-Aug-1990	1810Z	59	FF50	(G4CCZ)
50185	HB0/HB9QQ	11-Aug-1990	1732Z	59	JN47	(G4ASR)

Fig. 1.

DXpeditions

The latest letter to arrive from **Bo OZ1DJJ** indicates that he will be operating as OX3LX from Prins Christian Sund (GP80) between October 10-20 and will be QRV at most times during the day or night.

Neville Bethune G3RFS has sent details of his trip, with Nick G3KQX, to Sao Miguel in the Azores (CU2). Between July 10-20 nearly 1000 QSOs were made on 50MHz, of which half were with the UK. 120 contacts were made into USA and Canada with all W call areas being worked. Contacts were also made with LU8YYO and V51E. ZC4MK was heard but no QSO resulted. A total of 35 countries in 4 continents were worked using a Kenwood TS-680S, Tokyo amplifier and 4-element Yagi.

John Hotchin G4ATA has also provided details of his recent expedition to The Lizard, Cornwall (IN79) between August 10-17. Despite clashing with the Windbreakers Contest Group expedition to the same location a large number of QSOs were made. On 50MHz 14 countries and 36 locator squares were worked with the best DX being SV1OE. 144MHz results were very good, 42 squares in 17 countries being worked, the best DX being YU2CV. There was less activity on 430MHz but even so 14 squares were worked in 4 countries, the furthest contact being with ON5NY.

One reason for attempting this expedition was to raise money for charity via sponsorship. I am pleased to report that by the end of August, John had managed to raise over £800 for a worthy cause.

Finally, **John Lemay G4ZTR** has sent details of the Windbreakers expedition to The Lizard between August 10-15. The group consisting of G4VIX, G4ZTR and G6CMS made 110 QSOs on 50MHz, 35 of them via meteor scatter. Using 50W and a 5-element Yagi on 70MHz, 27 contacts were made, including EI2VPX/P and GM1SMI/P.

Beacon and Repeater News

The University of Saskatchewan, Canada, is planning a 50MHz auroral beacon of enormous proportions. The beacon will run between 1-2kW c.w. centred on 49.990MHz using 4 distinct carriers 1kHz apart. The antenna will consist of twelve 6-element Cushcraft Boomers, each with an 11m boom length. This "monster" is to be located 180km north-east of Thompson, Manitoba (VE4) and should make an excellent propagation indicator, perhaps for the entire northern hemisphere.

The Guildford 430MHz repeater GB3GF, has been closed down as its site is no longer available. Contact G4EML for further details.

The Bath Television repeater GB3UT, on channel RT1 is off the air for maintenance. Further details can be obtained from G8CPF.

Another TV repeater GB3TG, the 10GHz unit in Milton Keynes is also off the air for a rebuild. More information from G4NJU.

Back-Scatter

Meteor Showers

The following data, concerning meteor showers occurring in the next few weeks, will help you determine in which direction to beam at specific times and when the shower is below the horizon.

The Orionids meteor shower will be encountered between October 17-26, peaking on Monday 22nd. Between 0000 to 0300UTC beam north-east or south-west, 0300 to 0700UTC beam east or west, 0700 to 0900UTC beam south-east or north-west. The radiant is too low for effective working between 1100 to 2200UTC. This shower is broad with several sub-peaks and predicting when its maximum activity occurs is very difficult.

The Taurids shower lasts from October 11 to December 5, with maximum activity occurring on Sunday November 4, the same day as the 144MHz c.w. contest. Between 2100 to 2300UTC beam north-east or south-west, 2300 to 0300UTC beam east or west, 0300 to 0500UTC beam south-east or north-west. The shower radiant is low between 0700 to 1900UTC.

QRZ Contest!

The UK 6 Metre Group are holding a 50MHz contest to coincide with the SMIRK QSO Party on November 17-18. Non members of the 6 Metre Group can participate. If you require a full set of rules and contest stationery, send me an A4 size s.a.e.

If you fancy your chances at winning a c.w. contest or maybe just wish to enter the c.w. ladder then note that the RSGB 70MHz c.w. contest is being held between 0800-1200UTC on October 21 and the final legs of the 144MHz c.w. cumulatives will be run on October 26 and November 11 between 2030-2300 local time. If you want to try your hand at a longer event, the Marconi Memorial 24 hour c.w. contest is being held on November 3-4. This contest also has a 6 hour section, between 0800-1400UTC on November 4.

Operators of the u.h.f. and s.h.f. bands have not been left out. 430MHz cumulative contests will be run on October 17 and November 2 between 2030-2300 local time. Operators of the 1.3 & 2.3GHz bands are

SAT 13 OCTOBER			SUN 14 OCTOBER		
UTC	AZ	EL	UTC	AZ	EL
0100	71	5	0200	77	3
0200	83	14	0300	89	11
0300	94	22	0400	101	20
1300	264	20	1300	252	22
1400	276	11	1400	264	14
1500	287	3	1500	275	5

SAT 3 NOVEMBER			SUN 4 NOVEMBER		
UTC	AZ	EL	UTC	AZ	EL
0600	282	16	0700	284	19
0700	293	8	0800	295	11
0800	304	1	0900	306	4
1700	59	5	1800	56	6
1800	69	12	1900	67	14
1900	80	21	2000	77	22

Fig.2.

well catered for with cumulative contests arranged for October 9, October 25 and November 10. Timing is the same as the 430MHz cumulatives.

The Scandinavian activity contests will be run on the following dates. Microwave activity on November 1, 144MHz on November 5 and 430MHz activity on November 6.

The ARRL e.m.e. contest is scheduled for the weekends of October 13-14 and November 3-4. This is an ideal opportunity for the less well equipped station to hear or work some new countries or continents even if you don't have elevation facilities.

Fig.2 gives details of moonrise and

moonset times when the moon passes through the vertical beamwidth of your Yagi. Simply point the antenna in the correct direction and listen carefully for the c.w. from the mega e.m.e. stations. The calculations are based on central England but should be quite accurate for most of the UK especially if using a single Yagi. Let me know what you hear.

Deadlines

Please send your letters to reach me no later than the end of October. The target date for the following issue is November 30. I can also receive messages via packet radio at my mailbox GB7TCM.

Back-Scatter

Amateur Satellites

Reports to

Pat Gowen G3IOR

17 Heath Crescent

Hellesdon, Norwich, Norfolk NR6 6DX

This month we have cut the usual station operational details hopefully to include in following issues, in favour of covering the news and main content of the recent colloquium and other important educational aspects of amateur radio satellites.

AMSAT-UK Satellite Colloquium

The 1990 AMSAT-UK Satellite colloquium held at the University of Surrey from 26-29 July 1990 was a sell-out and a great success, with over two hundred visitors attending from 29 countries around the world. It opened on Thursday July 26 at 0900 for registration and coffee, followed by the welcome by Dr. Arthur Gee G2UK, Chairman of AMSAT-UK.

C. Van Dijk PA0QC, Chairman of Region 1 IARU, started off with a talk entitled 'Recent IARU Events and Decisions towards WARC'92, the Torremelinos Conference', followed by Ron Broadbent G3AAJ, Secretary of AMSAT-UK, speaking on 'Survey of Users present and future' and a talk on SUPARCO and the new BADR-1 Pakistan Satellite. After coffee break a discussion was held on the identification of future amateur space related objects and on matters of policy by AMSAT-NA, DL, UK, etc., producing a formal statement of requirements for IARU delegates to take to WARC.

After lunch, Dr. Karl Meinzer DJ4ZC, President of AMSAT-DL, spoke on 'What do You want on the Next Phase III Satellite, and are you willing to pay for it?' until tea, when Doug Loughmiller K05I, President of AMSAT-NA, delivered 'Future satellite projects by AMSAT-NA'. Following Doug came Hans Groenendaal ZS6AKV and Dr. Martin Sweeting G3YJO on the topic 'Satellites in Education: Is There a future

Role - Which way for Amateur Radio?' Dick Ensign N8IWJ then gave a talk 'Webersat and Microsat, The Educational Aspects', followed by a paper by Ross Forbes WB6GFJ entitled 'Project Oscar Group, Future plans' read by Ron Broadbent. At 1700 there was an open forum discussion and decision making session, followed by presentations and dinner in the hall restaurant. The day finished with a tour of the UoSAT Mission Control station.

Friday July 27 commenced with reception and registration, and a welcome by both UoSAT Director Dr. Martin Sweeting G3YJO and Dr. Arthur Gee G2UK. Z. Wahl G0NJC then spoke on 'Basic Orbits and Satellite Prediction', and G3AAJ with a satellite tracking and data software demonstration. After coffee Dr. Bob McGwier described 'Microsat Packet Operations' and 'Operating via UoSATs, an overview' then came Dr. F. Yamashita of

the JARL, addressing 'FO-20 operations'. After lunch Peter Guezlow DB2QS spoke on 'RS-14 & RUDAK-2 Operations', then David Silvester G2BFO on 'Mode L & S on AO-13', followed by afternoon tea and Freddy Guchteneire ON6UG on 'A Dedicated Satellite Tracking System'. After this came Phil Bridges G6DLJ of Siskin Electronics on 'Packet Radio Equipment', Dr. Marty Davidoff K2UBC on 'An Efficient Method of Calculating Average Daily Access Times' and Dr. Arthur Gee on 'My RS Satellite Operations'. Question Time and Presentations followed by the AMSAT-UK AGM before dinner. After dinner was a video and slide display and a talk for beginners entitled 'The Guide to Oscar Satellites' by Richard Limebear G3RWL. A tour of the UoSAT Mission Control followed this, and lastly a social session at the bar and club in Wates House.

Saturday July 28 opened at 0830 with registration and coffee and a welcome by Dr. Jeff Ward G0/K8KA of the UoSAT Project. Geoff Perry, OBE, of the famous Kettering satellite tracking gave his talk entitled 'I haven't got a callsign, but ...!' followed by G3YJO on 'The UoSAT Spacecraft on Ariane'. Following Martin came Bob McGwier N4HY and Lyle Johnson WA7GXD on 'The Microsat', then G0/K8KA on 'PACSAT Communication Protocols'. Lawrence Howell GM4DMA described the satellite operations in the North Pole 90 expedition, and after lunch Karl Meinzer DJ4ZC gave an overview of Phase III-D and reported on the July 26 meeting. James Miller G3RUH followed with an address on the 9600 baud modem and UoSAT-OSCAR-15, then to the rostrum came Doug Loughmiller K05I, President of AMSAT-NA to tell of the Shuttle Amateur Radio Experiments. Following afternoon



Fig. 1.

Fig. 2.

Hexbox	Contents	Var. C	Var. B	Var. A	Units
0	RX E/F Audio(W)	0	+0.0246	0	V p-p
1	RX E/F Audio(N)	0	+0.0246	0	DOVE.
2	Mixer bias V	0	+0.0102	0	Volts
3	Osc bias V	0	+0.0102	0	TELEMETRY.
4	RX A Audio(W)	0	+0.0246	0	V(p-p)
5	RX A Audio(N)	0	+0.0246	0	DECODE
6	RX A Disc	+10.427	-0.09274	0	kHz
7	RX A S meter	0	+1.0	0	Fr.Counts
8	RX E/F Disc	+9.6234	-0.09911	0	kHz
9	RX E/F S meter	0	+1.0	0	Counts
A	+5V bus	0	+0.0305	0	Volts
B	+5V RX current	0	+0.0001	0	Amps
C	+2.5V VREF	0	+0.0108	0	Volts
D	8.5V bus	0	+0.0391	0	Volts
E	IR detector	0	+1.0	0	Counts
F	LO Monitor I:	0	+0.000037	0	Amps
10	+10v bus	0	+0.05075	0	Volts
11	GaAs.f.e.t. bias I:	0	+0.000026	0	Amps
12	Ground Ref.	0	+0.01	0	Volts
13	+Z array volts	0	+0.1023	0	Volts
14	RX Temp	+101.05	-0.6051	0	Deg C
15	+X(RX) Temp	+101.05	-0.6051	0	Deg C
16	Bat 1 volts	+1.7932	-0.0034084	0	Volts
17	Bat 2 volts	+1.7978	-0.0035316	0	Volts
18	Bat 3 volts	+1.8046	-0.0035723	0	"
19	Bat 4 volts	+1.7782	-0.0034590	0	"
1A	Bat 5 volts	+1.8410	-0.0038355	0	"
1B	Bat 6 volts	+1.8381	-0.0038450	0	"
1C	Bat 7 volts	+1.8568	-0.0037757	0	"
1D	Bat 8 volts	+1.7868	-0.0034068	0	"
1E	Array volts	+7.205	+0.0720000	0	"
1F	+5V bus	+1.932	+0.0312	0	"
20	+8.5V bus	+5.265	+0.0173	0	"
21	+10V bus	+7.469	+0.021765	0	"
22	BCR Set point	-8.762	+1.1590	0	Counts
23	BCR load current	-0.0871	+0.00698	0	Amps
24	+8.5v bus amps	-0.0092	+0.001899	0	"
25	+5v bus current	+0.00502	+0.00431	0	"
26	-X array current	-0.01075	+0.00215	0	"
27	+X array current	-0.01349	+0.00270	0	"
28	-Y array current	-0.01196	+0.00239	0	"
29	+Y array current	-0.01141	+0.00228	0	"
2A	-Z array current	-0.01653	+0.00245	0	"
2B	+Z array current	-0.01137	+0.00228	0	"
2C	Ext power amps	-0.02000	+0.00250	0	"
2D	BCR Input amps	+0.06122	+0.00317	0	"
2E	BCR Output amps	-0.01724	+0.00345	0	"
2F	Bat 1 Temp	+101.05	-0.6051	0	Deg C
30	Bat 2 Temp	+101.05	-0.6051	0	"
31	Baseplate Temp	+101.05	-0.6051	0	"
32	FM TX1 r.f. out	+0.0256	-0.000884	+0.0000836	W
33	FM TX2 r.f. out	-0.0027	+0.001257	+0.0000730	W
34	PSK TX HPATemp	+101.05	-0.6051	0	Deg C
35	+Y array temp	+101.05	-0.6051	0	"
36	RC PSK HPATemp	+101.05	-0.6051	0	"
37	RC PSK BPTemp	+101.05	-0.6051	0	"
38	+Z array Temp	+101.05	-0.6051	0	"
39	S Band HPATemp	+101.05	-0.6051	0	"
3A	S Band Tx out	-0.0451	+0.00403	0	Watts

tea, A. de Silva Curiel G7GLY described Doppler tracking of UoSAT-1 decay, then Ray Soifer W2RS speaking about the orbital estimation for low-earth-orbiting satellites. Clive Underwood G1WTW then covered thermal design and analysis of the UoSAT spacecraft, after which came G7DSY M. Allery and E. Milton on u.h.f. antenna design for LEOs followed by a discussion period before the colloquium buffet dinner. The day ended with UoSAT Mission Control tours, a Fun Junk Sale, presentations, a series of three minute speeches, and the Grand Raffle Draw.

Sunday, the final day, opened with Leonid Labutin UA3CR talking on the new Soviet RS satellites and the Moscow Adventure Club, after which Dr. F. Yamashita of the JARL covered the FO-20 spacecraft and Lyle Johnson WA7GXD talked on TAPR DSP and Digital Radio Projects. After coffee your author Pat Gowen G3IOR and Ray Soifer W2RS came on to describe 144 and 432MHz e.m.e. operation on 'OSCAR-0' and to show a video of the G3HUL home-brew moonbounce station and on-the-air action. After lunch came P. Pidoux F6BVP on the French ARSENE amateur satellite project, Hans Groenendaal ZS6AKV on AMSAT-SA Balloon Projects, and Dr. Felix Cabello on 'Space Education in La Laguna University'.

Marty Davidoff K2UBC covered satellite archaeology after tea, then came Michael Meerman PA3BHF on 'Data Format on UoSAT spacecraft', G1WTW on 'Radiation Effects on UoSAT Spacecraft', after which came the presentations. Dr's Martin Sweeting and Arthur Gee closed the meeting with farewells at 1700, looking forward to another excellent series of presentations again next July.

Not the least of the joys were the meetings of many kindred spirits. Fig.1., snapped by DJ1KM, shows (left to right) your author G3IOR with Junior de Castro PY2BJO, provider of 'DOVE' and Leo Labutin UA3CR, provider of previous 'RS' and the future RM-1 amateur spacecraft. In the background is Freddy Guchteneire ON6UG, adjusting his portable dish for the on-site operating Mode B and S OSCAR-13 station.

The entirety of two issues of *Practical Wireless* would be insufficient to relay half the colloquiums information packed content, but here follows just a few of the many topics of general interest that were covered.

RM-1 Satellite

From Leonid Labutin UA3CR, came the decoding formula for the analogue mode telemetry that you may soon be hearing from the new AMSAT-U-Orbita/AMSAT-DL combined satellite, which was last said to be planned for launch on October 26.

Channel	Parameter	Formula	Unit
0	Output Power	N = 0.05N	Watts
1	PA Temperature	N = °C	° Celsius
2	24v Power Line	N = V	Volts
3	16v Power Line	N = V	Volts
4	9v Power Line	N = V	Volts
5	24v Power Supply	N = V	Volts

6 Internal Temp N = °C ° Celsius
7 Eng. Parameter N = * - - - -

Richard Limebear G3RWL explains that apparently the term 'RSM' in respect of the type of modulation given in our earlier data from UA3CR stands for 'Rectangular Spectrum Modulation', but no other information about this is available at this time. The 70cm uplink receiver link antenna will utilise right hand circular polarisation, whilst the two metre will use a plane polarisation dipole. Only one transponder will be commanded on at any one time and that will mainly be the RUDAK analogue transponder.

FO-20

In answer to pleas made on behalf of keen 'JA' mode enthusiasts such as Dave Rowan G4CUO, Dr. F. Yamashita, the representative from JARL, said that arrangements would be made to provide more analogue mode operation, particularly at times of important DX possibilities such as when the apogee point provides optimum paths to remote activated areas.

He also promised that the FO-20 operating schedule would in the future be published well ahead, and that JARL will soon issue an operating achievement award for Mode JA operations.

The latest news on FO-20 is that it is now in full sun until probably May next year, and the satellite and battery has been already noted as heating up by G4CUO, who is closely observing the telemetered values. This has caused the JARL controllers to introduce unexpected 'off' rest periods to the programmed schedule.

ARSENE

F6BVP gave the colloquium a comprehensive presentation on the long awaited 'ARSENE' satellite, of which we published the basic and original details several years ago. 'ARSENE', an acronym for 'Ariane Radioamateur Satellite pour l'Enseignement de l'Espace' will be mounted within the rocket separation collar on the September 1992 Ariane flight carrying the Telecom-2-B payload, which is intended for a final equatorial orbit with

an apogee of 36000km and perigee of 20000km, 17.5 hour period.

Footprints covering the UK for this type of orbit are unusual compared to those that satellite users have hitherto been accustomed to, with the longest pass some 31 hours in duration, with gaps of 48 hours between passes occurring from time to time.

A solid fuel rocket motor will be used to raise the low perigee following launch into 'GTO' (Geostationary Transfer Orbit). The spin-stabilised satellite will carry three deployable solar panels and will be positioned as to be earth-pointing, using nitrogen gas jets for attitude control. The lifetime of the spacecraft is expected to be in the order of five years.

The hexagonal body structure will measure 900mm in diameter and 880mm high, weighing some 140kg with fuel prior to the kick motor firing.

The amateur radio communications payload will have a 70cm uplink with downlinks on 145 and 2445MHz, but the two Modes B and S will not operate simultaneously as with AMSAT-OSCAR-13. Mode B operation will be f.s.k. packet

Radio with three distinct 70cm uplink channels and a single multi-output 2 metre downlink. The S mode will be a linear transponder.

AMSAT-F also gave information of a proposal to launch a separate satellite on an Ariane flight in April 1991. If the proposal is realised, AMSAT-UK will make a significant donation to the project, which is hoped to carry a popular Mode 'A' 2m to 10m transponder. AMSAT Israel also gave details of their plan to build and launch a store-and-forward amateur radio satellite, which, like those developed by other Universities, would also carry scientific experiments. The future Italian microsat was in there too, and **Hans Groenendaal ZS6AKV** produced a novel proposal for a broadcast transponder and trans-ionospheric channel sounder for the Phase-III-D satellite for bulletins, technical material dissemination and educational use that will be described in a later issue.

PHASE-3D

Design requirements for the Phase-3D satellite were discussed, resolving the plan to improve up and down links by better than 10dB above the current AO-13 levels by using more power, more antenna gain, and specialised scanning a.i.c. 'anti-alligator' measures, so bringing simple low power v.h.f./u.h.f. mobile and hand-held cross continental satellite QSOs to all. The preliminary specification has a 250W p.e.p. transmitter in a 3 metre diameter toroidal structure weighing 400kg. AMSAT-DL would like it to carry 'X' band (10GHz) and other microwave equipment, plus experiments, educational features and the 'normal' communications payloads.

Sadly, that's all we have space for on this topic for this month but further content and aspects of this mass of satellite related information will be given in future issues. It will certainly give enthusiasts the incentive to book early and hear the experts first hand in next July's event.

AMSAT-NA Space Symposium

Following the highly successful AMSAT-UK colloquium the AMSAT-NA Space Symposium and Annual Meeting will be held October 10, 11 and 12 at the Johnson Space Centre (JSC) in Houston, Texas. Coming as it does during a year in which two Shuttle missions are scheduled to carry licensed amateurs, this should be an exciting site for the meeting. With the added attraction of the centre's extensive museum and fascinating tours available, attendance could easily break all records. The AMSAT-NA Space Symposium, to be held in the JSC Visitors' Centre Auditorium, is intended to feature talks on the latest in technology in both the manned and unmanned aspects of the Amateur Space Programme, including talks on MICROSAT utilisation. The session Sunday morning at the Ramada Kings Inn will feature presentations aimed at beginner satellite users and those wishing to try their hand with the RS birds, AO-13 and the new range of microsats.

DOVE Decoding

In response to many queries of packeters who have come across their first satellite in the form of the highly popular 'DOVE' on 145.825MHz, and stated their desire to 'decode' the various parameters sent down to their packet radio terminal screens, **John Branegan GM4IHJ** has supplied the means of bringing the information to meaningful figures of interest. First, he provides the frame content, see **Fig. 2**.

DOVE Decoding Examples

The above shows the format of the Dove Telemetry Frame Decode File, with its 59 boxes labelled 00 hexadecimal to 3A hexadecimal. A typical transmission of telemetry sends a 57 or 59 element frame in two halves, e.g.:

```
DOVE-1>TLM
00:59 01:5A 02:8E 03:35 04:5C 05:59
06:6E 07:4A 08:70 09:6A 0A:45 0B:EF 0C:E8
0D:DC 0E:10 0F:23 10:DC 11:A0 12:02 13:EE
14:BF 15:B5 16:76 17:76 18:78 19:77 1A:76
1B:07 1C:7D 1D:79 1E:DE 1F:68 20:D1
DOVE-1>TLM
21:C8 22:6E 23:30 24:2A 25:24 26:70
27:01 28:4D 29:01 2A:03 2B:02 2C:01 2D:7A
2E:5F 2F:AA 30:D8 31:AB 32:10 33:B8 34:AB
35:A7 36:AC 37:AF 38:C8
```

John gives two examples as to how to decode elements of this telemetry, first by:

Example 1

Step 1. Chose which item you want the data for. e.g. to get r.f. E/F Audio(W), read box 00.

Step 2. Read the appropriate box = 59 hex.

Step 3. Translate to ordinary numbers = $5 \times 16 + 9 = 89$.

Step 4. Using the values of the A,B and C variables appropriate to box 00, e.g. from Frame box 00 values are: A is zero, B is .0246, and C is zero.

Step 5. Substitute these values into the decode formula:

$RF\ R/F\ Audio(W) = A \times N \times N + B \times N + C$, e.g. $0 \times 89 \times 89 + .0246 \times 89 + 0 = 2.1894$ volts peak to peak.

Example 2

Chose boxes 32 and 33 to compare f.m. transmitters, which boxes show 10 and B8. This is translated as 16 and 184.

The formula for box 32 $A \times N \times N + B \times N + C$ which gives $.0000836 \times 16 \times 16 - .000884 \times 16 + .0256 = .03286$ watts, so TX is nearly zero, thus it is off. The formula for box 33 $A \times N \times N + B \times N + C$, giving $.000073 \times 184 \times 184 + .001257 \times 184 + (-.0027) = 2.70076$ watts, so TX2 is the operational transmitter.

John adds: "Please note that some descriptions of DOVE telemetry have reported box 3A as S Band HPA Temp and box 39 as S Band TX out. As yet there is no confirmation as to the correct order of these two boxes. In addition, Dove seems not to transmit these two boxes, although S Band equipment is definitely fitted and operating on some but not all orbits. Software is available from AMSAT-NA, which does all the mathematics for you, but, if you only want to watch one or two

special parameters, you can easily make direct translation tables. The most interesting parameters for the experimenter are block 26 to 2B which change very rapidly as the satellite spins in the sun." GM4IHJ will be giving out future bulletins with details of experiments using this telemetry.

UoSAT-3 Operating Manual

Recognising that the new packet radio satellites pose a tremendous challenge to radio amateurs both in terms of their technical 'quantum leap' and their apparent need for expensive equipment, GM4IHJ and GM4JJJ have recently published the draft of the *UoSAT-3 Operating Manual*, of which 25 copies of the final version will be available by mid-September, the make up costs of which come to UK £3-50 per copy including post and packing. The thirty plus page booklet attempts to simplify all the technicalities, and provides instructions for making up very simple and cheap UoSAT-3 station equipment. (e.g. GM4IHJ's present UoSAT-3 9600 baud receiver cost just £5-20 UK, which I shall try to describe as part of his developed hardware in next month's column). Both Geoff Ward G0/K8KA of the UoS and I have studied the coming manual, and we are very impressed with the content, format and quality, it being clear, easy to follow with lots of diagrams and pictures. Being fully comprehensive in all aspects for newcomer and experimenter alike.

John asks that enthusiasts should NOT send money now, but write to John Branegan at 8 Whitehills, Saline, Fife, Scotland KY12 9UJ, expressing their interest. He will respond to tell you if and when a copy is available. If this helpful guidance approach is taken up, a future booklet on DOVE may follow a month later.

WO-18 SPACE SCIENCE STUDIES

Chris Williams WA3PSD, also finds that curious Hams often wonder if science can be fun, and suggests that if you combine space science with OSCARs you get an unusual mix of exhilaration and excitement by observing a phenomenon that would be missed in normal daily life. This is what the students at Weber State University (WSU) discovered when they recently noticed that WO-18 was going to pass through a total solar eclipse as its orbit took it over Finland and Siberia. Ground controllers took advantage of this fact and quickly started to prepare to take pictures of this event using WO-18's c.c.d. camera. It was their hope to snap a picture of the earth as WO-

18 passed through the penumbra and umbra. Also, the Whole Orbit Data (WOD) telemetry mode was programmed so that solar panel array currents could be recorded and examined later. The very difficult task of planning the telemetry capture and picture taking during this event was quite taxing, however, it paid off as the WOD data revealed that WO-18 did indeed pass through the solar eclipse at the exact predicted time. The c.c.d. camera was programmed to take eleven pictures, one every 13 seconds. The first picture was to be snapped at 02:42:35UTC on July 22. As WO-18 came back over WSU on the next pass, an immediate dump of the telemetry showed that their predictions had been perfect. The WOD showed a marked decrease in solar array current, but alas, no pictures were taken which accurately showed what the earth looked like during an eclipse. Although that is what WSU engineers wanted to see the most, this time it was not to happen. Not to be discouraged, in future solar eclipses, WSU engineers plan to do this again until they do snap a picture of the earth during an eclipse.

In another interesting scientific observation, the microscopic particle impact detector on WO-18 recorded a significant number of collisions during a recent meteor shower. During one day the impact detector noted eleven hits during one orbit when normally, the impact detector only records two collisions a day. Once again, WSU engineers will be planning WOD operations during future meteor showers as they continue to study this.

Chris reports that significant progress has been made in further refining picture taking strategies. WSU engineers now have a far better understanding of how to use the information from photo cells to determine when WO-18's c.c.d. camera is looking down at the earth. Also, new software algorithms are being developed to decide when to take pictures.

WA3PSD announces that WSU will be sending out a beautiful QSL card to all those amateurs who have either captured telemetry or a picture from WO-18. Just send your hard copy of telemetry or data to WSU/CAST, Eng. Tech. Bldg., Rm 236, 3850 Harrison Blvd., Ogden, UT 84408-1805, USA. It MUST be a REAL picture (White pieces of paper or totally darkened pictures will not count!). Please include an s.a.s.e or s.a.e plus 3 IRCs to expedite the return of your QSL card. For more information about the availability of WeberWare 1.0 which will process the image data from WO-18 contact, AMSAT HQ or AMSAT-UK.

Whether you've just started, or are an 'old hand', Pat needs your feedback and news. Write to him at: 17 Heath Crescent, Hellesdon, Norwich, Norfolk NR6 6DX.

BUY THE BEST — BUY



SOLID BRITISH ENGINEERING



CAPACITORS, ROLLER COASTERS AND BALUNS

BUILD YOUR OWN A.T.U. FOR £66.10

CAP-25S	£17.90
CAP-25T	£21.80
R/COAST	£26.40 + £4.50 p&p

BUILD YOUR OWN LOOP — COMPLETE KITS

AMA3 COVERS 10-20m	£276.20 + £10.00 p&p
AMA5 COVERS 30, 40, 80m	£360.65 + £15.00 p&p

OR INDIVIDUAL PARTS e.g.

CAP-L1 + MOTOR 10-20m	£55.15 + £3.00 p&p
CAP-L2 + MOTOR 30-80m	£99.50 + £5.00 p&p

NEW RECEIVING LOOP AERIAL

RMA-1 COVERS 1.5-7.0MHz INC. AMPLIFIER	£79.50 + £5.00 p&p
RMA-2 COVERS 7.00-30MHz	£44.50 + £5.00 p&p

See Short Wave Magazine, June, for review

AMA3 COVERS 10-20m	£314.60 + £15.00 p&p
AMA5 COVERS 30-80m	£429.00 + £20.00 p&p

YOU ONLY NEED TWO AERIALS FOR

CONTINUOUS COVERAGE FROM 3.5 to 30MHz

COST OF THE TWO AERIALS — ONLY £665.50 + £30 p&p

THIS OFFER INCLUDES CONTROL BOX, CLAMPS AND CABLES

BRITISH WORKMANSHIP AT ITS BEST

*NEW PRODUCT FROM C.R.O.

S-305 AERIAL SWITCHING UNIT
1-160 MHz, 300 Watts PEP. £64.95 + £3.00

AS-305R AERIAL SWITCHING UNIT

REMOTE VERSION OF ABOVE £74.95 + £3.00 p&p

*NEW PRODUCT

SPC-100 A.T.U.

1-30 MHz, 300 Watts PEP. £79.50 + £5.00

For more information on any of our products including high power A.T.U.'s, Loop Antennas for commercial use, send to:

C.R.O. ELECTRONICS LTD

WE'RE HONOURED TO HAVE SUPPLIED THE POLAR EXPEDITION WITH TWO OF OUR SPC-300 'D' ANTENNA TUNING UNITS

See article in September Radcom

CAP.CO ELECTRONICS LTD
UNIT 28, PENLEY IND EST
PENLEY, WREXHAM, CLWYD LL13 0LQ
TEL: 0948 74717

Reg Ward & Co. Ltd.

1 Western Parade, West Street, Axminster, Devon, EX13 5NY.
Telephone: Axminster (0297) 34918

Yaesu

ICOM

KENWOOD

FT1000	HF Transceiver	2995.00 (10.00)
FT7B7	HF Transceiver	1599.00 (9.00)
FEX767(2)	2m Module (767)	179.00 (3.00)
FEX767(70)	70cm Module (767)	225.00 (3.00)
FEX767(8)	8m Module (767)	179.00 (3.00)
SP7B7	Speaker	69.95 (3.00)
FT747GX	Budget HF Transceiver	659.00 (9.00)
FT757GX	MkII HF Transceiver	969.00 (9.00)
FT700	20A P.S.U.	219.00 (4.00)
FC700	Manual ATU	149.00 (3.00)
FP757HD	Heavy Duty 2m P.S.U.	258.75 (4.00)
FT73B	Remote Aerial Switch	80.00 (3.00)
FT14700	270cm 45/35W Base Stn. SPECIAL PRICE	1159.00 (10.00)
FT290MkII	2m/70cm Dual Band FM Mobile S. PRICE	499.00 (7.00)
FT2311R	MkII Super 280 2m Multimode 2.5W	429.00 (5.00)
FT211RH	MkII 6m M/Mode 2.5W	475.00 (5.00)
FT212RH	2m 45W FM Mobile	309.00 (5.00)
YHA44D	New 2m 45W FM Mobile	349.00 (5.00)
MMB15	2m Helical	8.50 (2.00)
FT411	70cm 1/2 wave	12.50 (2.00)
FTB11	Mobile Bracket	14.55 (2.00)
FT470	2m H/H Keyboard	225.00 (3.00)
FT23R	70cm H/H Keyboard	239.00 (3.00)
FT73R	2m Mini H/H	349.00 (3.00)
FNB8	2m Mini H/H	229.00 (3.00)
FNB10	Nicad Battery Pack (23/73)	34.50 (2.00)
FNB11	Nicad Battery Pack (23/73)	34.50 (2.00)
NC18C	Nicad Battery Pack (23/73)	67.85 (2.00)
SMC28	Charger (23/73) 13A Plug	17.71 (2.00)
NC28	Charger (23/73)	17.71 (2.00)
PA8	Base Charger (23/73)	69.00 (3.00)
MH12A2B	Car Adapt Charger (23/73)	24.15 (2.00)
MH18A2B	Speaker Mic Miniature (23/73/727)	31.05 (2.00)
FRG9B00M	Speaker Mic Miniature (23/73/727)	31.05 (2.00)
PA4C	60-950MHz Scanning RX	509.00 (9.00)
NC9C	Power Supply for 9600	29.00 (2.00)
PA3	Charger	11.50 (2.00)
YM24A	Car Adaptor/Charger	21.85 (2.00)
FRV8B00	Speaker Mike	31.05 (2.00)
FRV8B00	HF Receiver	549.00 (9.00)
FRV8B00	Converter 118-175 for above	100.00 (3.00)
FRV8B00	HF ATU	59.00 (3.00)
MH1B8	Hand 600 Bpm mic	21.00 (2.50)
MH1B8	Desk 600 Bpm mic	79.00 (2.50)
MF1A3B	Boom mobile mic	25.00 (2.50)
YH7	Lightweight phones	19.99 (2.50)
YH55	Padded phones	19.99 (2.50)
YH1	Uwright Mobile Hest-Boom mic	22.75 (2.50)
SB1	PTT Switch Box 250/790	22.00 (2.50)
SB10	PTT Switch Box 270/2700	22.00 (2.50)
FL2025	25W Linear	115.00 (3.00)
FL6020	8m 10W Linear	109.00 (3.00)

IC785	HF Transceiver	2499.00 (10.00)
IC751A	HF Transceiver	1500.00 (10.00)
IC735	New HF Transceiver	879.00 (9.00)
IC728	HF/Bm base stn.	989.00 (9.00)
IC725	HF Base Transceiver	759.00 (8.00)
AT100	100W ATU (75/745)	365.00 (4.00)
AT150	150W ATU (735)	315.00 (4.00)
PS55	Ext PSU (735)	189.00 (4.00)
IC505	50MHz multi-mode portable	1069.00 (9.00)
IC290D	2m 25W M/Mode	859.00 (5.00)
IC229E NEW	2m 25W FM Mobile	329.00 (5.00)
IC25E	2m Mini Handheld	275.00 (5.00)
IC2400	2m/70cm FM Dual Band Mobile	639.00 (5.00)
IC275E	New 2m 25W Base Stn IC75E	1069.00 (9.00)
IC45E	70cm H/Held	310.00 (5.00)
IC24ET	2m/70cm Dual Band H/Held	385.00 (5.00)
IC490	70cm 10W M/Mode	617.00 (5.00)
IC2400	2m/70cm FM Dual Band Mobile	639.00 (5.00)
ICR71	Gen Cov RX	859.00 (9.00)
IC7000	VHF/UHF Scanner	989.00 (9.00)
AH7000	25-1300MHz Discone	82.00 (4.20)
SP3	Ext Speaker	61.00 (4.00)
CK70	DC Cable (R70/R71)	7.00 (2.00)
EX257	FM Board (R70/R71)	41.00 (2.00)
GC5	World Clock	43.00 (3.00)
AC2	Waterproof Bag all Icom H/H	14.36 (2.00)
BC35	Desk Charger	70.15 (3.00)
BP3	Battery Pack 8.4V (2/4E/02/04E)	29.90 (2.00)
BP4	Battery Pack 10.8V	9.20 (2.00)
BP6	Battery Pack 10.8V	60.95 (2.50)
CP1	12V Charge Lead BP3/7/8	6.90 (2.00)
DC1	DC/DC converter operates from 12V	18.40 (2.00)
HM45	NEW Mini speaker mic	24.15 (2.00)
HMB	Speaker Mic	21.85 (2.50)
HMB	Headset inc PTT/Vox unit	41.25 (2.00)
LC41	IC32 + BP3	9.20 (2.00)
LC42	IC32 + BP5	9.20 (2.00)
SMB	1.3uA/600uA BP Base Mic	82.00 (3.00)
R1	150kHz-1300MHz RX	P.O.A.
R72 NEW	HF RX	P.O.A.
R100	500KHz-1800MHz	P.O.A.

C W Keyers

HI-MOUNT	HK702 Straight key (adjustable tension)	42.75 (2.50)
HK702	Straight key (adjustable tension)	49.69 (2.50)
HK704	Straight key (adjustable tension)	26.25 (2.50)
HK705	Straight key (adjustable tension)	26.25 (2.50)
HK706	Straight key (adjustable tension)	26.25 (2.50)
HK707	Straight key (adjustable tension)	25.49 (2.50)
HK802	Straight key (Deluxe-Brass)	99.95 (3.50)
HK803	Straight key (Brass)	89.95 (3.50)
MK703	Squeeze key	37.00 (2.50)
MK704	Squeeze key	24.99 (2.50)
MK705	Squeeze key	32.78 (2.50)
MK706	Squeeze key	35.00 (2.50)

STARMASTER	Electronic Keyer Unit (No Paddle)	54.70 (4.00)
Dewbury	Electronic Memory Keyer (No Paddle)	95.00 (4.00)
G250	Light Duty	78.00 (4.00)
AR200XL	Light Duty	49.50 (4.00)
G400	Medium Duty	139.00 (5.00)
G400RC	Medium Duty (Round Face)	189.00 (5.00)
G600RC	Medium/Heavy Duty	219.00 (5.00)
G200RC	Heavy Duty	445.00 (5.00)
G500	Elevating Rotor	149.00 (5.00)
GR5400	Azimuth/Elevating	279.00 (5.00)

Rotators

TS950S	New HF Transceiver	24.99 (10.00)
TS940S	9 Band TX General Cov RX	1995.00 (10.00)
AT940	Auto/ATU	244.88 (4.00)
SP940	Ext Speaker	87.85 (4.00)
TS140	HF 9 Band Gen. Cov. TX/RX	862.00 (9.00)
TS860S	HF/Bm TX Gen. Cov. RX	985.00 (9.00)
TS440	9 Band TX General Cov RX	1138.81 (9.00)
AT440	Auto/ATU	144.82 (4.00)
PS50	H/Duty PSU	222.49 (4.00)
PS50	All Band ATU/Power Meter	206.67 (3.00)
SP230	External Speaker Unit	66.49 (4.00)
PS430	Matching Power Supply	173.78 (4.00)
SP430	Matching Speaker	40.81 (4.00)
SM220	Station Monitor	343.82 (4.00)
BSS	Band Scope Unit (830/940)	77.00 (2.50)
TH22	10/160 2kW Linear	1495.00 (10.00)
TH25	2m H/Held	238.00 (5.00)
TH45	70cm H/Held	289.00 (5.00)
TH75	2m/70cm H/Held	398.00 (5.00)
TH205	2m H/H Keyboard	215.28 (5.00)
TH215	2m 25W M/M Mobile	252.13 (5.00)
TR751	VHF/UHF Transceiver	599.00 (9.00)
TS790	Gen Coverage HF/RX	1495.00 (10.00)
R2000	118-174MHz Converter (R2000)	599.00 (9.00)
R5000	General Coverage HF/RX	161.94 (3.00)
VC20	118-174MHz Converter (R5000)	875.00 (9.00)
TM701	2m/70cm FM Mobile	167.21 (3.00)
TM731	2m/70cm FM Mobile	489.00 (5.00)
TM231E	2m FM Mobile 50/10/5W	289.00 (5.00)
TM431E	70cm FM Mobile 35/10/5W	319.00 (5.00)
SMC30	Speaker/Mic TH21/4/2600	28.31 (3.00)
MC30	4P Desk Mic	46.08 (4.00)
MC80A	8P Desk Mic	86.22 (4.00)
MC80	Electric Desk Mic	53.96 (3.00)
MC85	Desk Mic Audio Level Comp	89.00 (4.00)
MC43	8P Fast Mic	22.22 (3.00)
MC35	4P Fast Mic	21.72 (3.00)
MC55	Mobile Mic (6p.o. Bp)	52.87 (3.00)
LF30	HF Low Pass Filter	32.28 (2.50)
H55	Lightweight HiPhones	24.36 (2.50)
RZ1	Deluxe HiPhones	37.64 (2.50)
	500Hz-950MHz AM/FM Scanner	485.00 (6.00)

SWR/PWR Meters

HANSEN	130/440MHz 20/200W	82.75 (2.50)
W720S	1.5-160MHz	16.50 (2.50)
JD110	1.5-160MHz	31.50 (3.00)
YMX	1.5-160MHz	93.15 (3.00)
Yasu Y560	140-525MHz	81.85 (3.00)
FS500H	1.5-30MHz	53.40 (3.00)

Miscellaneous

SMCS 2U	2 Way 50/239 Switch	18.95 (2.50)
SMCS 2N	2 way 'n' Scts Switch	23.50 (2.50)
Kempor KP21N	2 way Switch 'n' Socket Deluxe	20.00 (2.50)
T25	30W Dummy Load	11.25 (2.50)
T100	100W Dummy Load	49.00 (3.00)
T200	200W Dummy Load	85.00 (3.00)
WAI	WaveMeter 120-450MHz	24.95 (2.00)
PK232	Pack/RTTY Terminal	289.95 (3.00)
Detong D70	Morse Tutor	63.40 (3.00)
Detong FL2	Audio Filter	100.91 (3.00)
Detong FL3	Audio Filter/Autotouch	145.81 (3.00)
Detong ASP	Processor 4pin	93.15 (3.00)
Detong ASP	Processor 8pin	93.15 (3.00)
Detong AD370	Active Antenna	77.82 (3.00)
Detong PC1	General Coverage Converter	154.90 (3.00)

Instant credit available.
Mail/Telephone order by cheque or
credit card. Cheques cleared before
goods despatched.



OPEN TUES-SAT 9.00-5.30
(CLOSED MONDAYS)
LUNCH 1-2pm

STOCK ITEMS USUALLY
DESPATCHED WITHIN 48 HRS

DELIVERY/INSURANCE PRICES
IN BRACKETS
(E&OE)

Back-Scatter

Propagation

Reports to
Ron Ham
Faraday

Greyfriars, Storrington, West Sussex RH20 4HE

Solar

While **Ron Livesey** (Edinburgh) was projecting the sun's image he located 5 active areas on July 8, 10 and 14; 6 on the 16th; 7 on the 7th and 22nd; 8 on the 5th and 24th and 10 on days 3, 23, 26 and 28.

"The mean solar flux for July 1990 was 177 s.f.u.," wrote **Neil Clarke GOCAS** (Ferrybridge) and his computer print-out, **Fig. 1**, clearly shows the peaks of activity at the beginning and end of the month and the trough in the middle.

Doug Smillie (Wishaw) noted a short radio-blackout on the 7MHz band at midday on the 13th. **Ern Warwick** (Plymouth) heard fluctuations in the background noise of his 28MHz receiver on July 25, 27, 28, 30, August 2, 5, 12, 16, 17, 18 and 22. Those early August events were most likely due to activity among the 22 sunspots counted by **Ted Waring** (Bristol) on August 3 and/or the large sunspot group observed and drawn by **Patrick Moore**, with special apparatus, at his observatory in Selsey around 0900 on the 3rd and 5th, **Figs. 2 and 3**. Also, I bet that the aurora, 'dead' bands and background noise, reported between August 22 and 24, was due to the group that Patrick saw at 1100 on the 21st, **Fig. 4**. For example, **Fred Pallant G3RNM** (Storrington), a regular 28MHz watcher, remarked about the 22nd as, "the quietest day I have known for a long time" and on the 23rd and 24th he heard nothing until about 1400 and then only the South African beacons came up.

Cmdr Henry Hatfield (Sevenoaks) recorded individual bursts of solar noise with his 136MHz radio telescope on July 24 and 26 and August 21, 22 and 26 and more continuous noise on days 23, 24 and 25. Did any of you see Henry operating his spectroheliograph and radio telescopes in ITV's *Equinox* programme between 1900 and 2000 on August 26? However, while observing with this instrument, Henry located 1 sunspot group, 12 filaments, 12 quiescent prominences and a small 'hot spot' at 1120 on July 24; 3gps, 16fs and 10qps at 1020 on August 12; 3gps, 12fs and 10qps at 1142 on the 17th; 5gps only seen, because of cloud at 1115 on the 20th; 3gps, 13fs and 10qps at 1130 on the 21st; 4gps, 19fs and 10qps at 1045 on the 22nd and 2gps, 15fs and 12qps at 1057 on the 28th.

Auroral

"Aurora at 0100 - Fairly conspicuous rays through Ursa Major. No colour. Lasted for an hour," wrote **Patrick Moore** on July 29. I was not a bit surprised when I saw Patrick's super drawing of the central meridian sunspot group which he observed at 0610 on the 25th, **Fig. 5**. Do keep in mind that radiations from a group like that can produce an aurora at any time while it is visible from earth.

Ron Livesey, the auroral co-ordinator for the British Astronomical Association, received reports of 'auroral glow' from an observer in North Dakota for the overnight period on the 1st, 2nd and 17th and 'rayed arc' on the 7th. 27 observers located in




Fig. 1

Canada, southern-England, Northern Ireland and Scotland told Ron about the massive aurora on the night of 28/29 and auroral disturbance to terrestrial radio signals for the same period was identified by **Tony Hopwood** (Worcester) and **Doug Smillie**. Tony observed the same effect on days 12 and 13. **Ern Warwick** tells me that the German Beacon DKOWCY on 10.144MHz gave weak auroral indications between 1210 and 1900 on the 29th and strong at 1900 on August 23 and 0830 and 2100 on the 24th.

Magnetic

Neil Clarke's graph shows that the Ap index for July, **Fig. 6**, "was quiet to unsettled till the 28th when it became stormy with an index of 76 and 61 on the 29th." The various magnetometers operated by **Tony Hopwood**, **Garry Hunt** (Bristol), **Ron Livesey** and **Doug Smillie** between them recorded disturbance on days 3, 5, 9, 11, 13, 14, 17, 18, 19, 20, 21, 24, 26, 27 and 29 and an "active storm" on the 28th.

Sporadic-E

Barry Bowman (Prestwich) received pictures from Spain on Ch. E2 (48.25MHz) and identified their broadcast stations on 87.6 and 87.8MHz around 1800 on July 31. **John Woodcock** (Basingstoke) received strong Arabic sound during the afternoon of July 27 and test-cards from Italy, Norway, Portugal, Spain and the USSR on August 2 and Norway again on the 4th. In Great Sutton, **Bob Brooks**, often received pictures in Band I (48-68MHz) from Finland, Germany, Iceland, Italy, Scandinavia, Spain and the USSR during a series of openings between August 1 and 6.

Another Sporadic-E disturbance lasted until the late evening on August 2 and in that time I received strong pictures in Band I from Hungary, Italy, Norway, Spain and the USSR, at least a dozen Italian or Spanish broadcast stations in Band II (87.5-106MHz) and about 40 Eastern-European f.m. broadcasters between 66 and 73MHz.

Simon Hamer (New Radnor) received television pictures from Greece and Morocco on August 1 and Iceland, Switzerland, and Yugoslavia on the 2nd. In Arbroath, **David Glenday** received pictures from Austria, Italy and Spain in Band I and heard Spanish f.m. stations in

on the days indicated in **Fig. 7**. In addition he received signals, almost daily, throughout this period from IK6BAK on 24.915MHz and PY2AMI on 18.100 and 24.931MHz; JA2IGY, LU4AA, ZS6DN/B, 4U1UN/B and 4X6TU/B on 14.100MHz and DKOWCY on 10.144MHz.

Tropospheric

The slightly rounded atmospheric pressure readings for the period July 26 to August 25, **Fig. 8**, were taken at noon and midnight from the barograph installed at my home in Sussex, some 60m a.s.l.

A change from the very hot weather and high atmospheric pressure was apparent on August 8 and true to form co-channel interference appeared on some u.h.f. channels during the evening of the 8th and while I was parked at Bosham, Sussex on the 9th, I received strong negative pictures from France on Chs. L5 and 9 in Band III (175-230MHz) and 21 and 26 in the u.h.f. band on my Plustron TVR5D with its own rod antenna. **Andrew Jackson** (Wirral) received pictures in Band III from Ireland on August 1 and France on the 7th and 8th and when Simon Hamer checked Band II on the 4th he logged BBC Radios Guernsey and Jersey, Melody Radio (London), Radio Harmony (Coventry) and several stations in Ireland. David Glenday had a good u.h.f. television haul each day from July 31 to August 4 when he identified pictures, most often in colour, from Belgium, Denmark, France, Germany and Holland.

934MHz

"Since changing my feeder lines to the more flexible '10 FDB' there has been a marked improvement in TX and RX. The s.w.r. has also improved and the cable




Fig. 6

Band II on the 1st and logged pictures from Italy on Ch. 1b (62.25MHz) at 0640 and Italian and Spanish f.m. stations during the evening of the 2nd. I found 9 East Europeans between 66 and 70MHz and weak to reasonable pictures on Chs. E2 and 4 (62.25MHz) around 2030 on August 23 and 40 broadcasters (66-73MHz), plus fluctuating television pictures and sound on Chs. R1 (49.75MHz), R2 (59.25MHz), R3 (77.25MHz) and R4 (85.25MHz) between 0750 and 0830 on September 2.

Propagation Beacons

First, my thanks to **Mark Appleby G4XII** (Scarborough), **Chris van den Berg** (The Hague), **Henry Hatfield**, **John Levesley G0HJL** (Bransgore), **Greg Lovelock G3III** (Shipston-on-Stour), **Ted Owen** (Maldon), **Fred Pallant**, **Ted Waring** and **Ern Warwick** for their detailed 28MHz beacon logs from which I compiled this months chart of the beacons they heard, **Fig. 7**. **Ern Warwick** copied signals from KK4UC and PT2AA on 28.220MHz, LU2FFV on 28.292MHz and PB0AAQ on 28.225MHz




Fig. 2




Fig. 3




Fig. 4




Fig. 5

Back-Scatter

Fig. 7

losses a mere 0.105dB per metre. A recommended mod to all on the band," wrote **Les Jenkins GB-37** from Godalming.

While the good conditions prevailed during late July and Early August, **Terry Wyatt UK-845** (Walton on Thames) worked BB-15/M (Brighton) at 65km, UK-432 (Canvey Island), UK-717 (South Banfleet), UK-888 and UK-1400 (Southend), UK-968 (Hadleigh), UK-1381 (Leigh on Sea) and UK-1555 (Hockley) all around 80km, UK-879 (Huntingdon) at 112km, JD-25 (Littleborough) at 175km, UK-1375 (Boston) at 200km. Although Terry heard, but could not raise WL-34 in Torquay (240km) he did hear UK-369 in Cowley make contact. John Levesley UK-627) heard or worked stations in the Channel Islands, around 165km, on July 28 and 29 and August 1, 3, 4, 5, 6, 10 and 11, a few on Butser Hill (80km) on July 29 and one in Brixham (128km) on August 1.

Tea on Hot Days

I had the pleasure on a very hot August 1 of meeting and showing members of the Wednesday CW Club, from the Ashford area, around the Vintage Wireless Exhibition at the Amberley Chalk Pits museum. The group, lead by **Geoff Voller G3JUL** (centre front row) were guests of the museum's curator **Mike Wall** (far right back row) and where better to start the day and record the event, **Fig. 9**, than outside the tea shop. We had our priorities right, wireless second, hi. Joan and I also had the pleasure of drinking tea in the September sunshine with **Dick and Peggy Ganderton** from our associate journal *Short Wave Magazine* on the 1st and **Geoff and Barbara Arnold** from *Radio Bygones*, **Myles Eckersley** the son of the late **Capt. Peter Eckersley** the first Chief Engineer of the BBC, Henry and Sue Hatfield and **Irene Marwood** and **David Marcuse** the widow and son of the late **Gerald Marcuse** on the 2nd. The museum had a special display that week-end dedicated to Gerald who pioneered Empire Broadcasting in 1927.

Fig. 9

Beacon	July						August																									
	26	27	28	29	30	31	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	
DF0AAB							X	X		X			X		X	X	X	X	X	X	X	X	X	X			X		X	X	X	
DF0THD															X	X	X	X	X	X	X	X	X	X					X	X	X	
DL0IGI	X	X	X			X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X			X	X	X	X	X	X	
EAS3JA	X	X	X	X		X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X		X		X	X	X		X	X	
HG5GEW	X	X	X			X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X		X		X	X	X		X	X	
IY4M	X	X	X	X		X	X	X	X	X	X	X	X	X	X	X	X	X		X	X	X		X		X	X	X				X
KK4UC													X		X	X	X	X		X	X	X		X		X	X	X				
LA5TEN				X			X	X	X	X	X	X	X	X	X	X	X		X	X	X	X		X		X						
LU1UG			X				X	X	X	X	X	X	X	X	X	X	X		X	X	X	X		X		X						
LU2FFV																		X	X	X	X					X		X				
NX20							X					X																				X
OK0EG	X			X		X	X	X	X	X	X				X	X	X	X	X		X	X							X			X
OH2TEN		X	X			X	X	X	X				X	X	X	X	X	X		X	X	X		X		X						
PB0AAQ								X							X	X	X	X		X	X	X		X		X		X				
PI7BQC							X								X															X		
PI7ETE							X								X															X		
PT2AA															X															X		
PT8AA																														X		
PY2AMI	X	X				X	X	X	X	X	X	X			X	X	X	X	X		X		X		X		X	X				X
SK5TEN		X	X			X	X	X	X	X			X	X	X	X	X	X		X		X		X		X		X	X			
VK2RSY				X			X								X	X	X	X		X		X		X		X		X	X			
VK3MEY				X																												
VK5WI				X			X											X	X		X		X		X		X		X			
VK6RWA				X			X	X					X					X	X		X		X		X		X		X			X
WA4DJS						X	X					X	X			X		X														X
W3VD						X	X					X	X			X		X														X
ZD8HF	X	X			X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X		X		X	X	X	X	X	X
ZS1LA	X	X			X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X		X		X	X	X	X	X	X
ZS5VHF	X	X	X	X		X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X		X		X	X	X	X	X	X
ZS6PW	X	X	X		X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X		X		X	X	X	X	X	X
4N3ANB	X	X	X	X		X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X		X		X	X	X	X	X	X
4N3ZHK	X	X			X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X		X		X	X	X	X	X	X
5B4CY	X		X			X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X		X		X	X	X	X	X	X
5Z4ERR						X			X			X	X	X	X	X	X	X	X	X	X	X		X		X	X	X		X		

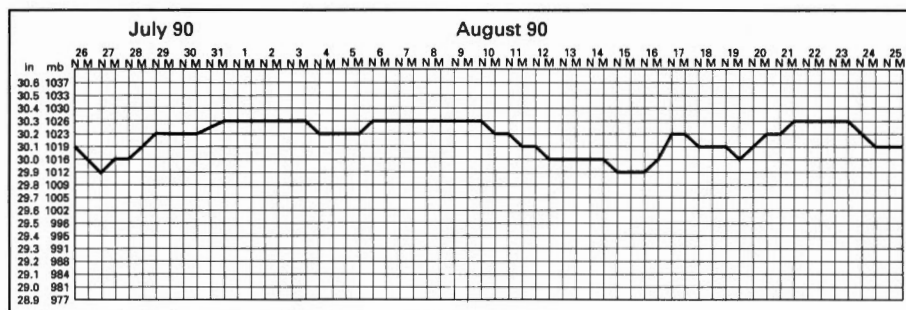


Fig. 8



Ron's page relies on feedback from you!

Write to him direct or via the office. Alternatively, we'll be pleased to pass on comments received by telephone.

Back-Scatter

Broadcast Round-up

Reports to
Peter Shore, via the PW Editorial Office

Broadcast Round-up

Reports to
Peter Shore, via the *PW* Editorial Office

During the past weeks there has been little news to displace the Gulf crisis from the leading story in news bulletins on the world's most significant international radio broadcasters. Radio Kuwait is still unheard - it has been replaced on many of its pre-invasion regular frequencies by Iraqi radio.

As is usually the case when crisis flares up overseas, international radio comes to the fore, and is noted by Joe Public, too. Television news bulletins on both the BBC and ITN in this country have shown BBC World Service in English and Arabic at work, and made use of material gathered by BBC Monitoring at its country mansion base on the outskirts of Reading. Pictures of Sony ICF-7600D receivers being

used by Arabs and Western expatriates in the Middle East to tune in to London or Washington for reliable information have been flashed around the world. But radio has proved in many cases more reliable than certain satellite television services. CNN in Atlanta relayed Iraqi television

news bulletins live when Saddam Hussein was quoted at length, pouring out rhetoric and threat to the West. But CNN became somewhat confused, placing a caption on the Iraqi TV news reader suggesting that he was President Saddam. It took several hours before this was corrected. At least

that cannot happen on radio!

BBC World Service started a special programme called *Gulf Link* heard at 1645 daily to keep Westerners in the Middle East and particularly those in Baghdad and Kuwait City, informed about developments and news from home. Meanwhile, Arabic language broadcasts from London are still being intermittently jammed by Iraq although additional frequencies have been brought in to use, and programme hours extended by an hour and a half daily.

The Deputy Managing Director of BBC World Service, David Witherow, said "Jamming the BBC is always the last resort of those who wish to suppress the truth - and in a way it is a tribute to the role of the

Back-Scatter

World Service at times of crisis". Evidence of the way in which World Service is a unique lifeline to the outside world for those trapped came from a letter faxed from the Manager of Thai Airways in the Gulf to Bush House:

"From questioning those Thais who escaped from Kuwait by crossing the border near Al Kafaji in Saudi Arabia, I discovered that a group of them trying to flee lost heart - in the middle of the desert and were going to return. Suddenly they heard the news on the BBC that somehow some Thais had managed to get out via Al Kafaji already, which encouraged them to continue their journey and they succeeded in reaching the Saudi border".

Radio Australia has been allocated 11.5 million Australian dollars for upgrading transmitters. Australia is endeavouring to focus its resources on the Pacific region, and is still investigating potential relays in Thailand or other Asian countries.

European Stations All times UTC (=GMT)

The 1900 European service from the Voice of Greece is now heard on 9.695MHz, replacing 9.395, with Greek, English at 1920, French at 1930 and German at 1950. The parallel frequency is 11.645MHz.

Radio Norway International increased its English language programmes to include Saturday on September 2, something the station had wanted for a good many years. The Norwegian Foreign Office finally agreed the additional budget in the Spring of this year. The current schedule is now:

1200 on 25.73 & 21.735MHz
1300 on 9.59 & 9.585MHz
1600 on 15.22 & 25.73MHz
1700 on 9.655MHz
1800 on 17.755MHz
1900 on 25.73, 21.705, 15.235 & 15.22MHz
2100 on 15.165MHz
2200 on 17.73 & 15.195MHz
0100 on 11.925MHz
0200 on 11.735 & 9.615MHz

English programmes from Soviet Republic stations include:

Radio Tashkent with English at 1200 until 1230 and 1330 until 1400 on: 17.74, 11.785, 9.715 and 7.325MHz.

Radio Vilnius has English at 2130 for half an hour on 9.675, 6.10 and the two regular m.f. channels of 666kHz and 1.557MHz. The transmission at 2200 can be heard on 15.485, 15.445, 15.18, 13.645 and 11.79MHz.

Radio Kiev has an English service for Europe at 2000 on 7.28 (this replaces 9.865MHz). At 2300, the North American service is transmitted on 17.69, 17.665, 15.18, 12.06, 12.005 and 11.77MHz.

Radio Minsk has German language transmissions on Wednesday, Saturday and Sunday at 1730 on 11.96, 11.78, 9.60 and 7.33MHz.

Middle Eastern and African Stations

Reports from The Congo suggest that a new 100kW short wave transmitter has been installed by Radio Diffusion-Television Congolaise and that 300kW senders are due to be installed in the next few months. Try 15.19 and 6.115MHz.

Radio Baghdad is beaming programmes in English to Western military personnel in Saudi Arabia, noted at 1630 on 11.86MHz. The broadcast claimed that transmissions on this frequency would be heard at 1000+1200, 1600+1800 and 2000+2200. The European English service continues at 2000 on 13.66MHz through until 2200, but this is not in parallel with the special military service.

Use of transmitters of Radio Kuwait has now settled down, with 13.62MHz in use since the end of August. Strangely enough, one of the regular Kuwait channels of 15.505MHz has been unheard since the closure of Radio Kuwait some days after the invasion.

A clandestine station has been heard on 9.73 and most recently 9.72MHz during most of the day (from at least 0500 until

2200) in Arabic, with the name Holy Mecca Radio. It appears to be directed against the Saudi government and people.

Israel has changed a frequency for its evening transmissions to Europe, moving from 17.575 to a new 17.59MHz. French at 2100 and English at 2130 are affected by this alteration.

The current schedule from Kol Israel suggests that there is now a relay of the Israeli television news programme at 1900 until 1955 on 15.64MHz. Checks made so far indicate that Russian is transmitted on this channel at 1900, although it may be that this service will be introduced during the current schedule period, which runs in the case of Israel until November 4.

Roy Merrill in Dunstable has written with details of Radio RSA's new schedule from September 2.

0400-0500 on 11.90 and 7.27MHz with *Good Morning*.

1100-1200 on 17.835, 11.90, 11.805, 9.555

1500-1700 on 15.27, 7.23

1700-1800 on 17.79, 15.27, 7.23

The programme *Africa South* is heard on weekdays after the 1100 and 1700 news casts, and the request programme *Yours and Mine* is broadcast each day except Saturdays at 1600.

Asian and Pacific Stations

Radio Japan is using the facilities of Africa Number One in Gabon to relay increased Arabic language programmes from 0930 until 1000 on 21.53MHz.

Roy Merrill reports his findings about Radio New Zealand International, detailing his use of 9.855 with variable results at 0700 with SIO of 433 to 454, particularly on Wednesdays for the *Countdown* pop album chart programme, heard to the 0800 news and close down at 0815. Also on Saturdays from 0700 with *Saturday*

Scrapbook, but transmissions continue until 1000 with *Beyond Our Ken* or *Round the Horne*. Roy suggests that a typical SIO of 433 down to 332 over the period.

15.485MHz has been barely audible, but has improved recently from sign on at 1753 through to close at 2200.

North, Central and South American Stations

Radio Canada International is using the facilities of Radio Austria for its special programmes for the Gulf region. At 0330, Arabic is heard on 11.73, whilst an hour later at 0430, 15.275MHz is in use.

Meanwhile a special programme for relatives to send messages to Canadians held in Iraq and Kuwait has been introduced. Broadcast at 0400, the frequencies are the same as the special Arabic service.

Last month's column included details of s.s.b. tests from HCJB in Quito. News now of German language programmes from the station which include regular transmissions using s.s.b. senders. The new schedule is:

0430 on 25.95, 21.46 & 11.835MHz

0600 on 25.95, 21.46, 15.27, 11.835 & 9.61MHz

1830 on 25.95, 21.48, 17.79 & 15.27MHz

The s.s.b. frequencies are 25.95 and 21.46MHz

Voice of America Arabic programming has been increased, but to counteract Iraqi jamming, new frequencies have been introduced. At 0530 a new service is heard on 6.16, 7.16, 7.255, 9.74, 15.16 and 17.705MHz.

VoA Europe is being relayed on h.f. frequencies to the Gulf at 0300 on 6.095, 15.16, 15.225, 17.81 and 17.865 and at 0800 on 11.74, 15.16, 15.195, 21.535 and 21.615MHz.

Have you heard anything interesting? Phone the editorial answerphone and leave the details for everyone to read about it.

The time for our quarterly activity column has flown round again and once again we have news about amateur television from all round the world.

Celtic Nations Linkup

Our first port of call this time is the principality of Wales. A most enthusiastic letter from **Derek GW3FDZ** in Dyffryn Ardudwy. Derek's interest in ATV goes back quite a way: 'twas he who carried out the first contact between GW and GD with John Lawrence back in 1958. Of course everyone knows that 405 lines travelled better than 625 (no letters please!) but it was a major achievement in those days.

Another major achievement has been the recent revival of ATV in Eire, and one of Derek's regular ATV contacts now is **Craig**

Back-Scatter

ATV

Reports to
Andy Emmerson G8PTH
71 Falcutt Way
Northampton NN28PH

EI3FW who provides P5 pictures. It looks as if all Derek's contacts are fated to be across water, since his location between Barmouth and Harlech only permits him to cover the coastal area between Cardigan in the south and the northern end of Cardigan Bay. But the path across to Ireland is fine! If anyone finds themselves on the

west coast of Wales, then a phone call in the evening on 03417-343 will have Derek on the air in no time.

Derek also speaks enthusiastically of an ingenious in-line masthead pre-amp from RN Electronics, details on Brentwood (0277) 214406. This is r.f. switched and will withstand up to 300W, which is handy

as Derek uses a 100W linear. The pre-amp provides a gain of 14dB on receive.

Kent Television Group Progress

A letter from **Chris G4AYT** confirms that things are bubbling on the north Kent coast. He writes: "The Kent Television Group was set up at the second meeting of local amateurs interested in television on August 23 1990. The aim of the group in particular is to establish a 23cm amateur television repeater with a primary coverage area of north Kent, as well as to encourage activity on 23cm ATV.

"The group's executive committee consists of G4AYT, G4BBH, G6GHP, G8GHH and G8SUY. Members of the group are asked to pay an initial subscription of £10 as expenses are expected to be high in the

Back-Scatter

first year. Further details of progress can be obtained from G8SUY, while subscriptions should be sent to G4AYT."

Chris adds that conditions have been very good on 23cm during the summer. "A regular signal here in Whitstable has been that of the North Norfolk repeater, GB3TN in full colour with sound. Indeed this repeater is an excellent indicator of propagation to the north from Kent. On August 1 G0KZN running a couple of watts in Lincolnshire was an excellent colour signal here in Whitstable. Many Dutch stations have been seen, including the following at P5 during August: PE1DWA, PI6ATE, PA6ROT and PE1KTO. The last of these, PE1KTO, was listening on 145.790MHz and could not be contacted as none of my three 144MHz rigs can get on that channel! Activity in the area has been low on 70cm, despite some good conditions, PE1DWA and PA3CHH having been seen P5."

70cm Is Still Alive

That's the feedback from several areas. Even though many operators' main sphere of activity is now 24cm, most of them can still transmit a signal on "good old seventy", so don't be afraid to ask if you are new on this band. Another word to the wise: I hear that private mobile radio (p.m.r.) is starting to occupy the frequencies directly above 440MHz in many areas now. There are dark rumours that a few TV amateurs transmit colour on seventy and their signals spill out above 440MHz. I cannot believe

anyone would be so foolish or thoughtless, but rest assured that if there are any complaints of interference from business users, the Radio Investigation Service will be forced to look into them. Let's avoid this.

New Zealand News

Our regular correspondent **Mike Sheffield ZL1ABS** advises that he has now received his 23cm transmitter kit from the Sussex Repeater Group. He had travelled all the way from New Zealand to the BATC's convention at Harlaxton to buy one but there were no Worthing people there! Still, he had a nice letter of apology from them and no doubt everyone who didn't attend this year will come to Harlaxton next year and make it an even greater success.

Recently Mike and **Wayne ZL1USK** gave a talk to the Auckland VHF Group entitled "What's New in ATV". They brought along some project from the NZ *Break-IN* magazine plus the teletext video generator from the BATC's *ATV Compendium*. Mike had put two pages of video data into an EPROM promoting the AK group's ATV and voice repeaters. The meeting welcomed seeing this transmitted from the ATV repeater/beacon when the trustees approve it. On the r.f. front Mike displayed the Worthing transmitter kit (not yet built up) and a new 70cm a.m. transmitter design with subcarrier sound for portable work. While coffee was served the Severnside Repeater Group's promo

tape was seen. To round it all off a live off-air demo from **Ken ZL1TVQ** was a success and Mike hopes they have raised the awareness of ATV in the v.h.f. Group. Well done! I don't get to hear of similar ingenuity here ... I wonder why not?

Radiovideograph Club Success

The sixth meeting of the members and friends of the Polish Radiovideograph Club took place over the weekend May 19/20th in Debrzno near Pila (writes **Stanislaw Pazur**). The venue was recommended by local club SP1KOS. For the first time in the history of the club the president of the national radio club PRV, SP5HS, was there. The guest of honour was Juergen Y23NE. Around 150 people attended the meeting and a special event station SP0RVG worked on the amateur bands. A special brochure was produced for the meeting entitled *ATV in Amateur Radio Sport*.

SP1FMH opened the meeting. In the chairman's report Mr Cwojdzinski SP2JPG summed up the major events of the last year. Krzysztof Slomczynski SP5HS, president of PRV, discussed the present complicated situation in PRV and plans for the future. The second part of the meeting is always very popular. There were some technical lectures about ATV with demonstrations (by SP2JPG) and packet radio (by Henryk SP5DED and Bartosz SP3CAI). Mr Cwojdzinski presented the interesting DF4PN mini-ATV transmitter. Members' constructions and commercial gear for packet radio were also shown.

During the meeting the following officers were elected: Chairman - Wojciech Cwojdzinski SP2JPG, Vice Chairman - Henryk Ignasiak SP5DED (packet radio technique), Vice Chairman - Bartosz Pastuszek SP3CAI, Secretary - Kazimierz Slomski SP2ERD, Intercontest Manager - Krzysztof Ulatowski SP2UUU and Committee Member - Jerzy Smietanski SP9AUV.

There was a flea market as usual and the participants exchanged some interesting computer programs. The packet radio group plan to establish the gateway 3599kHz/144.650MHz in Warsaw for mailbox and BBS. There are 16 stations with permission to transmit packet radio.

This year is a very special one for PRC members in Poland, being the tenth anniversary of the first QSOs in SSTV and RTTY. The first two-way SSTV contact was between SP3ZHC and OZ3WP on March 3, 1980. Station SP3ZHC was working the special event callsign SP0PIR. In RTTY SP3CAI was first on December 23 1980. As part of the celebrations the Club will organise a SSTV and RTTY contest on October 21 this year from 0600 to 1800UTC. Cups and diplomas will be awarded to the winners. (Thanks for all this useful info, Stan. It's good to know there is so much activity coming along.)

That's it for this time. Once again most of our news has been mainly foreign: is there really nothing going on in England and Scotland?!? Write and deluge me with YOUR news!

Radio Diary

October 14: Computercations will be held again this year at Hillhead campsite on the Dartmouth at Brixham, south Devon. **Bill Trezise. Tel: (0803) 522216.**

October 20: The G-QRP Club Mini Convention will be held in St Aiden's Church Hall, Manchester Road, Rochdale from 10am to 5pm. There will be a large social area, full lecture programme, equipment display, refreshments, Bring & Buy, Component/Kit Stands, Test Bench and lots more. Admission £1. **Rev George Dobbs G3RJV, QTHR.**

***October 20/21:** The 4th North Wales Radio Rally will be held at the Aberconwy Centre in Llandudno. Rally open as at 11am on both days and the entrance fee is £1 with OAPs 50p and children under 14 free. **Mr B Mee. Tel: (0745) 591704.**

***October 26/27:** The Leicester Amateur Radio Show will again be held in the Granby Halls, Leicester.

***November 18:** The Bridgend Annual Amateur Radio Rally will be held in the Leisure Centre, as last year but in 1990 they are taking over the whole of the

building! **Don Chennell GW4DUY. Tel: (0656) 863084.**

December 9: The Leeds & District ARS have their Christmas Rally in The Civic Hall, Dawsons Corner, Pudsey (junction of the Leeds Outer Ring Rd and Bradford Road A647). Talk in on S22. All usual facilities. Admission is by program only, 50p. Doors open 10.45. **Geoff on Leeds (0532) 585801.**

***Practical Wireless and Short Wave Magazine in attendance.**

AS SOON AS YOU HAVE DETAILS OF YOUR 1991 RALLIES, SEND THEM TO SHARON GEORGE AT OUR EDITORIAL OFFICES IN POOLE FOR FULL COVERAGE IN THIS COLUMN.
SPECIAL RATES ARE AVAILABLE TO RALLY ORGANISERS FOR DISPLAY ADVERTISING. CALL MARCIA BROGAN IN ADVERTISING ON (0202) 676033 FOR FULL DETAILS.

Wanna Swap!

Have D.L. Bird BBC FAX unit, Psion Organiser II (32k model XP), 4.5in reflecting telescope with equatorial mount, tripod lenses, etc. In excellent condition value £300 new, w.h.y. for h.f. v.h.f./u.h.f., etc. Tel: Bill 091 482 1344

Have Yaesu FT-790RII with NiCads, charger and 3-element collinear. Unit is little used and in mint condition. Would exchange for an h.f. linear or tri-band antenna with rotator or perhaps anything interesting for h.f./c.w. Tel: Arthur G0DKJ on Halifax (0422) 368021

Have G2DAF type h.f. linear amplifier complete with 2x 813 valves and one spare, plus power supply unit for 1.8kV. (The p.s.u. weighs 50kg and the amplifier 15kg). Would exchange for a BBC 'B' computer with DFS. Tel: G. Wilson G3APV (09467) 28449

Have Redifon R408 communication receiver covering 13kHz-28MHz without break, plus Trio TX599 custom special, both in good condition and with manuals. Would exchange for a 144MHz multimode transceiver. Tel: Tom Burke (0472) 602335

Have Realistic PRO2004 scanner complete with discone antenna, mast and coaxial cable. Would exchange for 144MHz transceiver or w.h.y. Tel: Tony Hall G0MQG (0603) 611764

Have Eddystone 770R Mk 2 v.h.f. receiver covering the range 19-160MHz in six bands. Having a very large tuning dial it requires much space on the bench. Would exchange for a mains powered airband receiver or a Halicrafter. Tel: F Walker (0221) 241088

Have late '20s' 4 valve portable receiver with built-in frame antenna and speaker. The unit works well and would exchange for an h.f. (w.h.y.) receiver. Tel: Mann (0223) 860150

Have AOR 2002 receiver with discone antenna and 1.3MHz frequency counter. All complete with p.s.u.s and leads. Tel: K Faulkner 061-748 9604

Have Realistic PRO2004 scanner would exchange for a good h.f. receiver. Tel: John (0865) 774602 after 5p.m.

Have ERA Microreader MkII and would exchange for h.f. mobile transceiver system (w.h.y.) Tel: B. Greer (0283) 63667

Have Black Star 1.3GHz frequency counter in 'as-new' condition. Would exchange for scanner or 144MHz transceiver or w.h.y. Tel: Godfrey Whiteway (0443) 772387

Have Polaris 12x52 binoculars as new in leather case. Murphy l.w./m.w./f.m. bands clock radio, plus cassette player as new with Shure 444 microphone. Would exchange for a KW202 receiver or similar (w.h.y.) Tel: George. King's Lynn (0553) 763428

Have new boxed compact disc player, with remote control, repeat, shuffle etc. Has never been played. Would exchange for a Grundig Satellit or similar digital h.f. receiver with b.f.o. Must be mint condition. Tel: Alex Kevan (0671) 3562

Have Sony PRO80 in mint condition with box, etc. Would exchange for either a hand-held or base station scanner w.h.y. Tel: Steve Grosvenor 021-422 3298

Have Korg Trident professional synthesiser and Roland Cube 60W amplifier complete with a five octave full size keyboard. A progressive disability forces disposal. Would exchange for a good 144MHz mobile preferably with 45W output (Kenwood Yaesu or w.h.y.) Tel: John Evans G7CEC (0706) 874044

QUARTZ CRYSTALS

QuartzLab MARKETING LTD

P.O. Box 19 Erith Kent DA8 1LH
Telephone: 0322 330830
Fax: 0322 334904
Telex: 8813271 GECOMSG
(Attention QUARTSLAB)
An SAE with all enquiries please
PRICES INCLUDE P&P and VAT

STOCK CRYSTALS			
CRYSTALS FOR 2 METRES			
HC25 £2.70 FOR ONE CRYSTAL	£2.50 EACH FOR 2 OR MORE		
TX CRYSTALS	RX CRYSTALS		
12MHz 30 & 40pF	44MHz Series Res	R0-R7, S8-S23,	
	14/15MHz 30pF		
	Scanner Crystals		
	SBS crystals £3.45		
HCS £2.80 FOR ONE CRYSTAL £2.60 EACH FOR 2 OR MORE			
TX CRYSTALS	RX CRYSTALS		
4MHz 30pF	44MHz Series res	R0-R7, S11, S20-23	
4 METRE CRYSTALS FOR 70.25 IN HC6/U at £2.80 each			
TX 8.78250 RX 29.7800			
70CM CRYSTALS £8.50/pc or £3.30 each.			
For Pys PF1 PF2 & PF70 series and FDK MULTI U11 SU20 RB0 RB1			
RB2 RB3 RB4 RB5 RB6 RB7 RB8 RB9 RB10 RB11 RB13 RB14 RB15.			
Also for MULTI U11 ONLY SU16 SU18			
CONVERTER CRYSTALS IN HC18/U AT £3.30 each.			
22.000, 38.666, 42.000, 96.000, 116.000			
FREQUENCY STANDARDS £3.20 each.			
HC6/U 100kHz, 10.000MHz			
HC18/U 7.000MHz 10.000MHz 10.700MHz 48.000MHz 100.000MHz			
TONEBURST, LF. & MPW CRYSTALS IN HC18 £2.80 each.			
HC18/U 7.000MHz 10.000MHz 10.700MHz 48.000MHz 100.000MHz			
7.168MHz (For 1750 Hz Tone), 10.245 (for 10.7 LF.)			
3.2768 4.000 5.0688 10.245MHz 15.00000			
YAESU CRYSTALS FOR FT101's FT101 & etc £4.80 each.			
Many available ex stock (A list is available on request please send S.A.E.)			

Full list available on request, please send SAE
PRICES INCLUDE P&P and VAT

MADE TO ORDER CRYSTALS			
FUNDAMENTALS	PRICE	OVERTONES	PRICE
FREQUENCY RANGE			
1.5 TO 2.0MHz	£3.90	3rd OVT 21.00 TO 65.00MHz	£3.25
2.0 TO 6.0MHz	£3.50	5th OVT 60.00 TO 110.00MHz	£3.90
6 TO 21MHz	£3.25	5th OVT 110.00 TO 125.00MHz	£3.80
21 TO 25MHz	£7.50	7th OVT 125.00 TO 175.00MHz	£11.80
DELIVERY			
2.0 to 175.00MHz 2 weeks approx.			
Unless otherwise requested fundamentals will be supplied for 30 pf load capacities and overtones for series resonant operation.			
HOLDERS - PLEASE SPECIFY WHEN ORDERING - else HC25/U supplied for XTLS above 3MHz.			
HC6/U & HC33/U 175MHz			
HC18/U & HC25/U 2-175MHz			
HC17 Add £1.00 HC45 Add £3.75			
DISCOUNTS: Price on application for 10+ units to same frequency/spec. or bulk purchases of mixed frequencies.			
COMMERCIAL CRYSTALS: available on fast delivery and at competitive prices.			
EMERGENCY SERVICE: FOR XTALS 1 to 175MHz. Add the surcharge for each XTAL. Days refer to working days. 4 days + £12, 6 days + £7, 8 days + £5, 13 days + £3.			
CRYSTAL SOCKETS HC25 £0.25 ea. MINIMUM ORDER CHARGE FOR SOCKETS £1.50 unless ordered with crystals.			
TERMS: Cash with order post inc. to UK & Northern Ireland. Cheques & PO's to QSL LTD.			

PRICES INCLUDE P&P and VAT

"Characteristics" for Amateur Radio

44 Hildethorpe Road, Bridlington, East Yorkshire YO15 3BG
Tel: (0262) 673635 Fax: (0262) 670568

THE IDEAL CHRISTMAS GIFT

Door Plaques "The Shack" £3.25

Personalized Mugs £3.75 (UK PRICES ONLY)

Allow 3 weeks for delivery of mugs. Prices include P&P. Cash with order.

OPEN 7 DAYS A WEEK BY APPOINTMENT ONLY

TOTAL COMMUNICATIONS

Pye Cambridge power supply, 240V input 12V output, 10 amp	£14.50	Post Paid
Pye Europe UHF 420/470MHz	£35.00	Post Paid
Pye Westminster AM high band, boot mount with control gear but no speakers and microphones, choice of 15	£23.00	Post Paid
Pye Olympe UHF 420/470MHz	£25.00	Post Paid
ITT sets, H-band AM, choice of 5	£18.00	Post Paid
Pye Cambridge AM high band, 160/175MHz, choice of 5	£18.00	Post Paid
Pye Olympe M203 mid-band AM, 105/140MHz boot mount, with no control gear	£15.00	Post Paid
Pye Olympe M203 low-band AM, 69/89MHz boot mount, with no control gear	£15.00	Post Paid
Pye Motophone high band AM	£20.00	Post Paid
Pye PF3 battery chargers (10-way)	£10.00	Post Paid
Pye P5000 battery chargers (10-way)	£20.00	Post Paid
Stereo (800) battery chargers, ex-Metropolitan Police	£18.00	Post Paid
Pye Olympe high band AM, no microphones or speakers	£25.00	Post Paid
Pye F30 base station, low band AM, choice of 25	£14.00	Post Paid
Pye F30 base station, high band AM, choice of 36	POA	
PF2 battery chargers	£15.00	Post Paid
Pye Westminster high band AM	£20.00	Post Paid
Pye Westminster (motorcycle) low band AM, (ex-Automobile Association), with control gear, direct from the AA	£15.00	Post Paid
Pye base station 402 receiver unit only, high band FM	£20.00	Post Paid
Pye base station 401 receiver unit only, high band AM, choice of 5	£20.00	Post Paid
Pye Vanguard low band AM with control gear	£14.00	Post Paid
Pye Westminster W30 HiBand AM boot mount with control gear (nomics or speakers)	£20.00	each, Post Paid
QEC high band AM 6 channel, choice of 5	£15.00	each, Post Paid
Pye Converters 24V input, 12V output, ideal for HGV	£10.00	Post Paid
Pye PF2 hand portable/body worn 420-470MHz complete with batteries, mic & aerials	£30.00	Post Paid
Burndy high band FM 1/2hds		
Pye PFS 1/2hds UHF 420-470MHz ideal for 70cm	£25.00	Post Paid
Pye A200 linear amplifier, 69-88MHz, ideal for 4m	£27.00	Post Paid
Pye Reporter AM low band, 69-88MHz	£40.00	Post Paid

Self addressed envelope for Catalogue please.

(80 minutes from M25),

(50 minutes from M11),

(30 minutes from Norwich).

UNITS 3 AND 4 THORNHAM HALL,
 THORNHAM MAGNA, EYE, SUFFOLK, IP23 8HA.
 TEL: 0379 838 333

SECONDHAND RADIO EQUIPMENT WANTED FOR CASH

The books listed have been selected as being of special interest to our readers. They are supplied from our editorial address direct to your door. Some titles are overseas in origin.

HOW TO ORDER

POST AND PACKING: add 85p for one book, £1.20 for two or more books, orders over £30 post and packing free, (overseas readers add £1.50 for one book, £3.00 for two or more for surface mail postage) and send a postal order, cheque or international money with your order (quoting book titles and quantities) to **PW Publishing Limited, FREEPOST, Eneco House, The Quay, Poole, Dorset BH15 1PP.** Please make your cheques payable to Practical Wireless, payment by Access, Mastercard, Eurocard or Visa also accepted on telephone orders to Poole (0202) 665524. Books are normally despatched by return of post but please allow 28 days for delivery. Prices correct at time of going to press. Please note: all payments must be made in Sterling.

* A recent addition to our Book Service. O/P = Out of print, O/S = Out of stock.

RADIO

AIR & METEO CODE MANUAL

10th Edition. Joerg Klingenfuss
Detailed descriptions of the World Meteorological Organisation Global Telecommunication System operating FAX and RTTY meteo stations, and its message format with decoding examples. Also detailed description of the Aeronautical Fixed Telecommunication Network amongst others. 289 pages. £15.00

BETTER RADIO/TV RECEPTION

A. Mallawaella, A. T. Cooch and B. D. Clark
An Australian book giving guidance and advice to listeners seeking reliable reception of distant radio stations, and to DX listening hobbyists. 134 pages. £3.95

PASSPORT TO WORLD BAND RADIO 1989

This book gives you the information to explore and enjoy the world of broadcast band listening. It includes features on different international radio stations, receiver reviews and advice as well as the hours and languages of broadcast stations by frequency. 398 pages. O/S

SCANNERS (Third Edition)

Peter Rouse GU10KD
A guide for users of scanning receivers, covering hardware, antennas, accessories, frequency allocations and operating procedures. 245 pages. £8.95

SCANNERS 2

Peter Rouse GU10KD
The companion to Scanners, this provides even more information on the use of the v.h.f. and u.h.f. communications band and gives constructional details for accessories to improve the performance of scanning equipment. 216 pages. £9.95

SHORT WAVE RADIO LISTENERS' HANDBOOK

Archer Miller
In easy-to-read and non-technical language, the author guides the reader through the mysteries of amateur, broadcast and CB transmissions. 207 pages. £7.95

RADIODOTYPE CODE MANUAL

10th Edition. Joerg Klingenfuss
This book gives detailed descriptions of the characteristics of telegraph transmission on short waves, with all commercial modulation types including voice frequency telegraphy and comprehensive information on all RTTY systems and c.w. alphabets. 96 pages. £3.00

THE SATELLITE EXPERIMENTER'S HANDBOOK (USA)

A guide to understanding and using amateur radio, weather and TV broadcast satellites. 207 pages. £7.95

1934 OFFICIAL SHORT WAVE RADIO MANUAL

Edited by Hugo Gersbach
A fascinating reprint from a bygone age with a directory of all 1934 s.w. receivers, servicing information, constructional projects, circuits and ideas on building vintage sets with modern parts. 260 pages. £10.15

HIGH POWER WIRELESS EQUIPMENT

Articles from Practical Electricity 1910-11
Edited by Henry Walter Young
A reprint of interesting practical articles from the early days of radio. 99 pages. £8.95

BEGINNERS

AN INTRODUCTION TO RADIO DXING (BP91)

R. A. Penfold
How to find a particular station, country or type of broadcast and to receive it as clearly as possible. 112 pages. £1.95

BEGINNER'S GUIDE TO RADIO

9th Edition. Gordon J. King
Radio signals, transmitters, receivers, antennas, components, valves and semiconductors, CB and amateur radio are all dealt with here. 266 pages. £7.95

ELECTRONICS SIMPLIFIED - CRYSTAL SET CONSTRUCTION (BP92). F. A. Wilson

Especially written for those who wish to take part in basic radio building. All the sets in the book are old designs updated with modern components. 72 pages. £1.75

THE SIMPLE ELECTRONICS CIRCUIT AND COMPONENTS Book One (BP92)

The aim of this book is to provide an in-expensive but comprehensive introduction to modern electronics. 209 pages. £3.50

TELEVISION

THE ATV COMPENDIUM

Mike Wooding G6JOM
This book is for those interested in amateur television, particularly the home construction aspect. There is not a 70cm section as the author felt this is covered in other books. Other fields, such as 3cm TV, are covered in depth. A must for the practical ATV enthusiast. 104 pages. £3.00

AN INTRODUCTION TO SATELLITE TELEVISION (BP195)

F. A. Wilson
Answers all kinds of questions about satellite television. For the beginner thinking about hiring or purchasing a satellite TV system there are details to help you along. For the engineer there are technical details including calculations, formulae and tables. 104 pages. £5.95

A TV-DXERS HANDBOOK (BP176)

R. Bunney
Information on transmission standards, propagation, receivers including multi-standard, colour, satellites, antennas, photography, station identification, interference etc. Revised and updated 1986. 87 pages. £5.95

GUIDE TO WORLD-WIDE TELEVISION TEST CARDS

Edith J. Keith Hamer & Gerry Smith
Completely revised and expanded, this is a handy reference book for the DXTV enthusiast. Over 200 photographs of Test Cards, logos, etc., world wide. 60 pages. £4.95

SATELLITE TELEVISION INSTALLATION GUIDE

2nd Edition. John Brooks
A practical guide to satellite television. Detailed guidelines on installing and aligning dishes based on practical experience. 56 pages. £11.95

THEORY

COMMUNICATION (BP98)

Elements of Electronics Book 5
F. A. Wilson
Fundamentals of line, microwave, submarine, satellite, digital multiplex, radio and telegraphy systems are covered, without the more complicated theory or mathematics. 256 pages. £2.95

FILTER HANDBOOK A practical design guide

by Stefan Niewiadomski
A practical book, describing the design process as applied to filters of all types. Includes practical examples and BASIC programs. 195 pages. £25.00

FROM ATOMS TO AMPERES

F. A. Wilson
Explains in simple terms the absolute fundamentals behind electricity and electronics. 244 pages. £3.50

AUDIO (Elements of electronics - book 6)

F. A. Wilson
This book studies sound and hearing, and examines the operation of microphones, loudspeakers, amplifiers, oscillators, and both disk and magnetic recording. Intended to give the reader a good understanding of the subject without getting involved in the more complicated theory and mathematics. 320 pages. £3.95

PRACTICAL ELECTRONICS CALCULATIONS AND FORMULAE (BP53)

F. A. Wilson
This has been written as a workshop manual for the electronics enthusiast. There is a strong practical bias and higher mathematics have been avoided where possible. 249 pages. £3.95

SOLID STATE DESIGN FOR THE RADIO AMATEUR

Wes Hayward W7ZOI and Doug DeMaw W1FB
Back in print by popular demand! A revised and corrected edition of this useful reference book covering all aspects of solid-state design. 256 pages. £10.95

THE ARRL ELECTRONICS DATA BOOK

Doug DeMaw W1FB
Back by popular demand, completely revised and expanded, this is a handy reference book for the r.f. designer, technician, amateur and experimenter. 280 pages. £8.95

A BEGINNERS GUIDE TO MODERN ELECTRONIC COMPONENTS (BP285)

R. A. Penfold
This book covers a wide range of modern components. The basic functions of the components are described, but this is not a book on electronic theory and does not assume the reader has an in-depth knowledge of electronics. It is concerned with practical aspects such as colour codes, deciphering code numbers and the suitability. 164 pages. £3.95

EVERYDAY ELECTRONICS DATA BOOK

Mike Tooley BA
This book is an invaluable source of information of everyday relevance in the world of electronics. It contains not only sections which deal with the essential theory of electronic circuits, but it also deal with a wide range of practical electronic applications. 250 pages. £8.95

LISTENING GUIDES

AIR BAND RADIO HANDBOOK (3rd Edition)

David J. Smith
Listen to conversations between aircraft and ground control. The author, an air traffic controller, explains more about this listening hobby. 174 pages. £8.99

AIR TRAFFIC CONTROL

David Adair
A guide to air traffic control with maps, drawings and photographs explaining how aircraft are guided through crowded airspace. 176 pages. O/P

DIAL SEARCH

6th Edition. George Wilcox
The listener's check list and guide to European broadcasting. Covers m.w., i.w., v.h.f. and s.w., including two special maps. 54 pages. £3.95

FLIGHT ROUTINGS 1990

T. T. Williams
Identifies the flights of airlines, schedule, charter, cargo and mail, to and from the UK and Eire and overflights between Europe and America. 104 pages. £4.95

GUIDE TO BROADCASTING STATIONS

20th Edition 1989/90. Philip Darrington
Frequency and station data, receivers, antennas, Latin American DXing, reporting, computers in radio, etc. 240 pages. £3.95

GUIDE TO FACSIMILE STATIONS 10th Edition

Joerg Klingenfuss
This manual is the basic reference book for everyone interested in FAX. Frequency, call sign, name of the station, ITU country/geographical symbol, technical parameters of the emission are all listed. All frequencies have been measured to the nearest 100Hz. 318 pages. £14.00

GUIDE TO FORMER UTILITY TRANSMISSIONS

3rd Edition. Joerg Klingenfuss
Built on continuous monitoring of the radio spectrum from the sixties until the recent past. A useful summary of former activities of utility stations providing information in the classification and identification of radio signals. 126 pages. £8.00

GUIDE TO UTILITY STATIONS

6th Edition. Joerg Klingenfuss
This book covers the complete short wave range from 3 to 30MHz plus the adjacent frequency bands from 0 to 150kHz and from 1.6 to 3MHz. It includes details on all

types of utility stations including FAX and RTTY. There are 15802 entries in the frequency list and 3123 in the alphabetical call sign list plus press services and meteorological stations. 502 pages. £19.00

HF OCEANIC AIRBAND COMMUNICATIONS

3rd Edition. Bill Laver
Aircraft channels by frequency and band, main ground radio stations, European R/T networks, North Atlantic control frequencies. 29 pages. £3.50

INTERNATIONAL RADIO STATIONS GUIDE (BP255)

Revised and updated in 1988, this book shows the site, country, frequency/wavelength and power of stations in Europe, the Near East and N. Africa, North and Latin America and the Caribbean, plus short wave stations worldwide. 128 pages. £4.95

MARINE UK RADIO FREQUENCY GUIDE

Bill Laver
A complete guide to the UK s.w. and v.h.f. marine radio networks. Useful information, frequency listings and the World Marine Coastal Phone Stations. 62 pages. £4.95

NEWNES SHORT WAVE LISTENING HAND BOOK

Joe Pritchard G1UDW
A technical guide for all short wave listeners. Covers construction and use of sets for the s.w.l. who wants to explore the bands up to 30MHz. 288 pages. £12.95

THE COMPLETE VHF/UHF FREQUENCY GUIDE

Updated 1988
This book gives details of frequencies from 26-2250MHz with no gaps and who uses what. Recently updated, there are chapters on equipment requirements as well as antennas, etc. 88 pages. £5.95

THE INTERNATIONAL VHF FM GUIDE

7th Edition. Julian Baldwin G3UHK and Kris Partridge G8AUU
The latest edition of this useful book gives concise details of repeaters and beacons worldwide plus coverage maps and further information on UK repeaters. 70 pages. £2.95

THE POCKET GUIDE TO RTTY AND FAX STATIONS

Bill Laver
A handy reference book listing RTTY and FAX stations, together with modes and other essential information. The listing is in ascending frequency order, from 1.6 to 27.1MHz. 46 pages. £2.95

SHORT WAVE LISTENERS CONFIDENTIAL FREQUENCY LIST

Bill Laver
Covering the services and transmission modes that can be heard on the bands between 1.635 and 29.7MHz. £8.95

VHF/UHF AIRBAND FREQUENCY GUIDE (Updated)

A complete guide to the airband frequencies including how to receive the signals, the frequencies and services, VOLMET and much more about the interesting subject of airband radio. 74 pages. £5.95

WORLD RADIO TV HANDBOOK 1990

Country-by-country listings of long, medium and short wave broadcast and TV stations. Receiver test reports. English language broadcasts. The s.w.l.'s 'bible'. 576 pages. £10.99

INTERFERENCE

INTERFERENCE HANDBOOK (USA)

William R. Nelson W4SFG
How to locate and cure r.f.i. for radio amateurs, CBers and TV and stereo owners. 253 pages. £8.75

RADIO FREQUENCY INTERFERENCE (USA)

What causes r.f.i.? Are all r.f.i. problems difficult, expensive and time-consuming to cure? These questions and many more are answered in this book. 84 pages. £4.99

AMATEUR RADIO

AMATEUR RADIO CALL BOOK (RS68)

Spring Edition
Now incorporates a 48-page section of useful information for amateur radio enthusiasts. 310 pages. £7.70

AMATEUR RADIO SATELLITES the first 25 years

Arthur C. Gee G2UK
This souvenir publication mainly a pictorial account of the pattern of developments which have occurred over the last 25 years. 34 pages. £2.25

AN INTRODUCTION TO AMATEUR RADIO (BP257)

I. D. Poole
This book gives the newcomer a comprehensive and easy to understand guide through amateur radio. Topics include operating procedures, jargon, propagation and setting up a station. 150 pages. £3.50

HINTS AND KINKS FOR THE RADIO AMATEUR

Edited by Charles L. Hutchinson and David Newkirk
A collection of practical ideas gleaned from the pages of QST magazine. 152 pages. O/S

HOW TO PASS THE RADIO AMATEURS' EXAMINATION (RS6B)

Clive Smith G4FZH and George Benbow G3HIB
The background to multiple choice exams and how to study for them with sample RAE papers for practice plus maths revision. 88 pages. £5.20

PASSPORT TO AMATEUR RADIO

Reprinted from PW 1981-1982
The famous series by GW3JGA, used by thousands of successful RAE candidates in their studies. Plus useful articles for RAE students. 96 pages. £1.50

PRACTICAL IDEAS FOR RADIO AMATEURS

Ian Poole G3VWX
Offers a wealth of hints, tips and general practical advice for all transmitting amateurs and short wave listeners. 128 pages. £5.95

PRACTICAL GUIDE TO PACKET OPERATION IN THE UK

Mike Mansfield G6AWD

Aimed at all user of packet mode being an excellent introduction and reference manual. Spiral bound to lay flat 70 pages A4 sized. £5.00

RADIO AMATEUR'S GUIDE TO RADIO WAVE PROPAGATION

(HF Bands), F. C. Judd G2BCX

The how and why of the mechanism and variations of propagation in the h.f. bands. 144 pages. £8.95

THE 1990 ARRL HANDBOOK FOR THE RADIO AMATEUR

This is the 56th edition of this very useful hardback reference book. Updated throughout it has several new sections covering oscilloscopes, spectrum analysers, digital frequency synthesis, phase-noise measurement and new constructional projects. 1202 pages. £15.95

*THE ARRL OPERATING MANUAL

Another very useful book from the ARRL. Although written for the American radio amateur, this book will also be of use and interest to the UK amateur. 684 pages. £12.95

THE ARRL SATELLITE ANTHOLOGY

The best from the Amateur Satellite News column and articles out of 31 issues of QST have been gathered together in this book. The latest information on OSCARs 9 through 13 as well as the RS satellites is included. Operation on Phase 3 satellites (OSCAR 10 and 13) is covered in detail. 97 pages. £4.95

THE COMPLETE OXER

Bob Lecher W9KNI

Now back in print, this book covers equipment and operating techniques for the DX chaser, from beginner to advanced. 187 pages. £7.95

THE RAE MANUAL (RSGB)

G.L. Benbow G3HB

The latest edition of the standard aid to studying for the Radio Amateurs' Examination. Updated to cover the latest revisions to the syllabus. 132 pages. £8.20

THE RADIO AMATEUR'S DX GUIDE (USA)

15th Edition

The guide contains information not easily obtained elsewhere and is intended as an aid and quick reference for all radio amateurs interested in DX. 38 pages. £2.95

THE RADIO AMATEUR'S QUESTIONS & ANSWER REFERENCE MANUAL

4th Edition, R. E. G. Petri G8CCJ

This book has been compiled especially for students of the City and Guilds of London Institute RAE. It is structured with carefully selected multiple choice questions, to progress with any recognised course of instruction, although it is not intended as a text book. 280 pages. £7.95

VHF HANDBOOK FOR RADIO AMATEURS (USA)

H. S. Brier W9EGQ & W. I. Orr W6SAI

VHF/UHF propagation, including moonbounce and satellites, equipment and antennas. 335 pages. £7.95

YOUR GATEWAY TO PACKET RADIO

Stan Horzepa WA1LOU

What is packet radio good for and what uses does it have for the 'average' amateur? What are protocols? Why, why, when? Lots of the most asked questions are answered in this useful book. It included details of networking and space communications using packet. 278 pages. £7.95

MAPS

RADIO AMATEUR'S MAP OF NORTH AMERICA (USA)

Shows radio amateur prefix boundaries, continental and zonal boundaries. 760 x 636mm. £2.95

IARU LOCATOR MAP OF EUROPE DARC

This multi-coloured, plastics laminated, map of Europe shows the AIRU ('Maidenhead') locator System. Indispensable for the v.h.f. and u.h.f. DXer. 692 x 872mm. £5.25

RADIO AMATEUR'S PREFIX MAP OF THE WORLD (USA)

Showing prefixes and countries, plus listings by order of country and of prefix. 1014 x 711mm. £5.95

RADIO AMATEUR'S WORLD ATLAS (USA)

Seventeen pages of maps, including the world-polar projection. Also includes the table of allocation of international call sign series. £3.50

DATA REFERENCE

DIGITAL IC EQUIVALENTS AND PIN CONNECTIONS (BP140)

A. Michaels

Equivalents and pin connections of a popular selection of European, American and Japanese digital i.c.s. 256 pages. £5.95

INTERNATIONAL OIOOE EQUIVALENTS GUIDE (BP108)

A. Michaels

Possible substitutes for a large selection of many different types of semiconductor diodes. 144 pages. Q/P.

INTERNATIONAL TRANSISTOR EQUIVALENTS GUIDE (BP285)

A. Michaels

Possible substitutes for a popular selection of European, American and Japanese transistors. 320 pages. £3.50

LINEAR IC EQUIVALENTS AND PIN CONNECTIONS (BP141)

A. Michaels

Equivalents and pin connections of a popular selection of European, American and Japanese linear i.c.s. 320 pages. Q/P

NEWNES AUDIO & HI-FI ENGINEER'S POCKET BOOK

Vivian Capel

This is a concise collection of practical and relevant data for anyone working on sound systems. The topics covered include microphones, gramophones, CDs to name a few. 190 pages. Hardback. £9.95

NEWNES COMPUTER ENGINEER'S POCKET BOOK

This is an invaluable compendium of facts, figures, circuits and data and is indispensable to the designer, student, service engineer and all those interested in computer and microprocessor systems. 203 pages. Hardback. £9.95

NEWNES ELECTRONICS POCKET BOOK

5th Edition

Presenting all aspects of electronics in a readable and largely non-mathematical form for both the enthusiast and the professional engineer. 315 pages. Hardback. £9.95

NEWNES RADIO AND ELECTRONICS ENGINEER'S POCKET BOOK

18th Edition, Keith Brindley

Useful data covering math, abbreviations, codes, symbols, frequency bands/allocations, UK broadcasting stations, semi-conductors, components, etc. 325 pages. Hardback. £9.95

NEWNES TELEVISION AND VIDEO ENGINEER'S POCKET BOOK

Eugene Trundle

This is a valuable reference source for practitioners in "entertainment" electronic

equipment. It covers TV reception from v.h.f. to s.h.f. display tubes, colour camera technology, video recorder and video disc equipment, video text and hi-fi sound. 323 pages. Hardback. Q/P

POWER SELECTOR GUIDE (BP235)

J. C. J. Van de Ven

This guide has the information on all kinds of power devices in useful categories (other than the usual alpha numeric sort) such as voltage and power properties making selection of replacements easier. 180 pages. £4.95

TRANSISTOR SELECTOR GUIDE (BP234)

J. C. J. Van de Ven

This guide has the information on all kinds of transistors in useful categories (other than the usual alpha numeric sort) such as voltage and power properties making selection of replacements easier. 192 pages. Q/P

FAULT FINDING

ARE THE VOLTAGES CORRECT?

Reprinted from PW 1982-1983

How to use a multimeter to fault-find on electronic and radio equipment, from simple resistive dividers through circuits using diodes, transistors, i.c.s and valves. 44 pages. £1.50

GETTING THE MOST FROM YOUR MULTIMETER (BP239)

R. A. Penfold

This book is primarily aimed at beginners. It covers both analogue and digital multimeters and their respective limitations. All kinds of testing is explained too. No previous knowledge is required or assumed. 102 pages. £2.95

MORE ADVANCED USES OF THE MULTIMETER BP265

R. A. Penfold

This book is primarily intended as a follow-up to BP239. Getting the most from your Multimeter. By using the techniques described in this book you can test and analyse the performance of a range of components with just a multimeter (plus a very few inexpensive components in some cases). The simple add-ons described extend the capabilities of a multimeter to make it even more useful. 85 pages. £2.95.

OSCILLOSCOPES, HOW TO USE THEM, HOW THEY WORK 3rd Edition

Ian Hickman

This book describes oscilloscopes ranging from basic to advanced models and the accessories to go with them. £12.95

PRACTICAL HANDBOOK OF VALVE RADIO REPAIR

Chas E. Miller

The definite work on repairing and restoring valued broadcast receivers dating from the 1930s to the 60s. Appendices giving intermediate frequencies, valve characteristic data and base connections. 230 pages. Hardback. £20.00

TRANSISTOR RADIO FAULT FINDING CHART (BP70)

C. E. Miller

Used properly, should enable most common faults to be traced reasonably quickly. Selecting the appropriate fault description at the head of the chart, the reader is led through a sequence of suggested checks until the fault is cleared. 635 x 455mm (approx). £9.95

CONSTRUCTION

COIL DESIGN AND CONSTRUCTION MANUAL (BP 160)

B.S. Benbeni

Covering h.f. coils to power transformers this 100 page pocket sized book is crammed full of information and tables for the constructor. 110 x 175mm 100 pages. £2.50

FURTHER PRACTICAL ELECTRONICS CALCULATIONS AND FORMULAE

(BP144)

F. A. Wilson

Covering Maths, digital maths, electrostatics, electromagnetics and all forms of electronic calculations, with many worked examples, of amplifiers, noise, feedback etc. 450 pages, 110 x 175mm. £4.95

HOW TO DESIGN AND MAKE YOUR OWN P.C.B.s (BP121)

R. A. Penfold

Designing or copying printed circuit board designs from magazines, including photographic methods. 80 pages. £2.50

INTRODUCING ORP

Collected articles from PW 1983-1985

An introduction to low-power transmission, including constructional details of designs by Rev. George Dobbs G3RLV for transmitters and transceivers from Top Band to 14MHz, and test equipment by Tony Smith G4FAL. 64 pages. £1.50

MORE ADVANCED POWER SUPPLY PROJECTS (BP182)

R. A. Penfold

The practical and theoretical aspects of the circuits are covered in some detail. Topics include switched mode power supplies, precision regulators, dual tracking regulators and computer controlled power supplies, etc. 92 pages. £2.95

POWER SUPPLY PROJECTS (BP76)

R. A. Penfold

This book gives a number of power supply designs including simple unregulated types, fixed voltage regulated types and variable voltage stabilised designs. 81 pages. £2.50

PRACTICAL POWER SUPPLIES

Collected articles from PW 1978-1985

Characteristics of batteries, transformers, rectifiers, fuses and heatsinks, plus designs for a variety of mains driven power supplies, including the PW "Marchwood" giving a fully stabilised and protected 12V 30A d.c. 48 pages. £1.25

ORP NOTEBOOK

Doug DeMaw W1FB

This book deals with the building and operating of a successful ORP station. Lots of advice is given by the author who has spent years as an ardent ORPer. All the text is easy-to-read and the drawings large and clear. 77 pages. £4.95

TEST EQUIPMENT CONSTRUCTION

R.A. Penfold

Describes, in detail, how to construct some simple and inexpensive, but extremely useful, pieces of test equipment. 104 pages. £2.95

50 (FEET) FIELD EFFECT TRANSISTOR PROJECTS

F.G. Rayer

50 circuits for the s.w.l., radio amateur, experimenter or audio enthusiast using f.e.t.s. 104 pages. £2.95

ANTENNAS (AERIALS)

AERIAL PROJECTS (BP105)

Practical designs including active, loop and ferrite antennas plus accessory units. 96 pages. £2.50

ALL ABOUT CUBICAL QUAD ANTENNAS (USA)

W. I. Orr W6SAI & S. D. Cowan W2LX

Theory, design, construction, adjustment and operation of quads. Quads vs. Yagis. Gain figures. 109 pages. £5.50

ALL ABOUT VERTICAL ANTENNAS (USA)

W. I. Orr W6SAI & S. D. Cowan W2LX

Theory, design, construction, operation, the secrets of making vertical work. 191 pages. £7.50

AN INTRODUCTION TO ANTENNA THEORY (BP198)

H. C. Wright

This book deals with the basic concepts relevant to receiving and transmitting antennas. Lots of diagrams reduce the amount of mathematics involved. 86 pages. £2.95

ANTENNA IMPEDANCE MATCHING

Wilfred N. Caron

Proper impedance matching of an antenna to a transmission line is of concern to antenna engineers and to every radio amateur. A properly matched antenna as the termination for a line minimises feed-line losses. Power can be fed to such a line without the need for a matching network at the line input. There is no mystique involved in designing even the most complex multi-element networks for broadband coverage. Logical step-by-step procedure is followed in this book to help the radio amateur with this task. 192 pages. £11.95

BEAM ANTENNA HANDBOOK (USA)

W. I. Orr W6SAI & S. D. Cowan W2LX

Design, construction, adjustment and installation of h.f. beam antennas. 198 pages. Q/P

*NOVICE ANTENNA NOTEBOOK

Doug DeMaw W1FB

Another book from the pen of W1FB, this time offering "new ideas for beginning hams". All the drawings are large and clear and each chapter ends with a glossary of terms. 130 pages. £5.95

OUT OF THIN AIR

Collected Antenna Articles from PW 1977-1980

Including such favourites as the ZL Special and ZBCX 16-element beams for 2m, and the famous "Slim Jim", designed by Fred Judd G2BCX. Also features systems for Top Band, medium wave/long wave loop designs and a v.h.f. direction finding loop. Plus items on propagation, accessories and antenna design. 80 pages. £1.80

PRACTICAL WIRE ANTENNAS - Effective HF Designs for the Radio Amateur

John D. Heys G3BCO

Wire antennas offer one of the most cost-effective ways to put out a good signal on the h.f. bands and this practical guide to their construction has something to interest every amateur on a budget. 100 pages. £7.53.

SIMPLE, LOW-COST WIRE ANTENNAS FOR RADIO AMATEURS (USA)

W. I. Orr W6SAI & S. D. Cowan W2LX

Efficient antennas for Top Band to 2m, including "invisible" antennas for difficult station locations. 191 pages. £6.75

THE ARRL ANTENNA BOOK (USA) 15th Edition

A station is only as effective as its antenna system. This book covers propagation, practical constructional details of almost every type of antenna, test equipment and formulas and programs for beam heading calculations. £12.95

THE ARRL ANTENNA COMPENDIUM (USA)

Volume One

Fascinating and hitherto unpublished material. Among the topics discussed are quads and loops, log periodic arrays, beam and multi-band antennas, verticals and reduced size antennas. 175 pages. £7.50

WIRES & WAVES

Collected Antenna Articles from PW 1980-1984

Antenna and propagation theory, including NBS Yagi design data. Practical designs for antennas from medium waves to microwaves, plus accessories such as a.u.s., s.w.r. and power meters and a noise bridge. Dealing with TVI. 160 pages. £3.00

W1FB'S ANTENNA NOTEBOOK

Doug DeMaw W1FB

This book provides lots of designs, in simple and easy to read terms, for simple wire and tubing antennas. All drawings are large and clear making construction much easier. 124 pages. £5.95

25 SIMPLE AMATEUR BAND AERIALS (BP125)

E. M. Noll

How to build 25 simple and inexpensive aerials, from a simple dipole through beam and triangle designs to a mini-rhombic. Dimensions for specific spot frequencies including the WARC bands. 80 pages. £1.95

25 SIMPLE INDOOR AND WINDOW AERIALS (BP136)

E. M. Noll

Designs for people who live in flats or have no gardens, etc., giving surprisingly good results considering their limited dimensions. 64 pages. £1.75

25 SIMPLE SHORT WAVE BROADCAST BAND AERIALS (BP132)

E. M. Noll

Designs for 25 different aerials, from a simple dipole through helical designs to a multi-band umbrella. 80 pages. £1.95

25 SIMPLE TROPICAL AND MW BAND AERIALS (BP145)

E. M. Noll

Simple and inexpensive aerials for the broadcast bands from medium wave to 49m. 64 pages. £1.75

THE RADIO AMATEUR ANTENNA HANDBOOK

William I. Orr W6SAI & Stuart O. Cowan W2LX

Yagi, quad, quagi, i-p, vertical, horizontal and "sloper" antennas are all covered. Also towers, grounds and rotators. 190 pages. £6.75

COMPUTING

AN INTRODUCTION TO COMPUTER COMMUNICATIONS (BP177)

R. A. Penfold

Details of various types of modem and their applications, plus how to interconnect computers, modems and the telephone system. Also networking systems and RTTY. 96 pages. £2.95

AN INTRODUCTION TO COMPUTER PERIPHERALS (BP178)

J. W. Penfold

Covers a wide range of computer peripherals such as monitors, printers, disk drives, cassette recorders, modems, etc., explaining what they are, how to use them and the various types of standards. 80 pages. £2.50

MICROPROCESSING SYSTEMS AND CIRCUITS (BP77)

Elements of Electronics Book 4

F. A. Wilson

A comprehensive guide to the elements of microprocessing systems, which are becoming ever more involved in radio systems and equipment. 256 pages. Q/P

MORSE

INTRODUCING MORSE

Collected Articles from PW 1982-1985

Ways of learning the Morse Code, followed by constructional details of a variety of keys including Iambic, Triambic, and an Electronic Bug with a 528-bit memory. 48 pages. £1.25

THE SECRET OF LEARNING MORSE CODE

Mark Francis

Designed to make you proficient in Morse code in the shortest possible time, this book points out many of the pitfalls that beset the student. 87 pages. £4.95

FAX AND WEATHER SATELLITES

Full resolution charts and greyscale pictures from any **SPECTRUM** computer to a dot matrix printer. Basic system £40 plus interface for FAX £40 or WX SATS £59.

TX-3 RTTY CW ASCII TRANSCEIVE

The best software available with every feature you could want. Needs TIF1 or terminal unit. **BBC-B/Master** and **CBM64** tape £20, disc £22 **SPECTRUM** tape £35, +3 disc £37 inc. adapter board. Also **VIC20** RTTY/CW transceive program £20.

RX-4 RTTY CW SSTV AMTOR RECEIVE

4-mode performance, superb features and ease of use make this still a best-seller. Needs TIF1 interface. **BBC-B/Master**, **CBM64** tape £25, disc £27. **VIC20** tape £25. **SPECTRUM** tape £40, +3 disc £42 inc. adapter board (needs TIF1 also). Software-only version (input to EAR socket) tape £25, +3 disc £27.

TIF1 INTERFACE Designed for TX-3 and RX-4 software and only available with them. Kit £25 (assembled PCB + cables, connectors) or ready-made, boxed with all connections £40.

GX-2 FAX SSTV TRANSCEIVE

Greyscale FAX and mono and colour SSTV on the **BBC** computer. Fantastic system. Reviews March 90 Amateur Radio and August 90 Ham Radio Today. Complete system of EPROM, interface, instructions, leads, only £99 or £119 with direct FAX printing option.

RX-8 8 MODE RECEIVE

Every possible feature and performance to receive FAX, HF & VHF PACKET, COLOUR SSTV, RTTY, CW, AMTOR, UoSAT and ASCII on any **BBC** computer. Reviews Oct 89 Ham Radio Today and March 90 Amateur Radio. Complete system of EPROM, interface, instructions, leads and demo cassette £259.

APT-1 WEATHER SATELLITE MODULE

Enables all weather satellite signals to be displayed on any FAX system. £59. Version for our RX-8 system just plugs in and only £39 if ordered with RX-8.

BBC LOCATOR with UK, Europe, World maps £10, **MORSE TUTOR** £6, **LOGBOOK** £8, **LOCATOR** £7, **RAE MATHS** £9. For **BBC**, **SPECTRUM**, **CBM64**, **VIC20**, **Electron**. **BBC**, **CBM64** programs available on disc at £2 extra.

Lots of information available about everything, please ask. Prices include VAT and p&p by return.

technical software (P.W.)

Fron, Upper Llandwrog, Caernarfon LL54 7RF

Tel: (0286) 881886.

VISA



Sitek

"Tamarisk" Tetbury Lane, Leighton, Glos. GL8 8UP Tel: (0666) 890307

SPECIAL OFFERS: **SONY** model KTX-9000UB Trinitron 9" high resolution colour Viewdata terminal (Prestel, Micronet, etc.) complete system with keyboard and model UP-101UB or UP-102UB video graphics printer. BT approved. 14-page memory, telephone number and multi ID storage, auto and manual dialing, internal modem and V24/RS232 1200/75 or 1200/1200 interface for external modem/packet, tape recorder interface and operating instructions. Second user systems all checked and in good working order and condition ONLY £198 + £10 P&P. **GOULD** OS1100-S1 Dual Beam Oscilloscope £190 + £10 P&P. **RACAL** RA17 from £200 RA17L from £240 0-30MHz. Eddiston 770R/770U VHF/UHF **COMMUNICATIONS RECEIVERS** £140 + £12 P&P **NEWBURY LABS** Model 8300R 80/132 Column Dot Matrix Printer with serial interface ideal for listing, RTTY/Packet printout etc. ONLY £40 each inc. P&P (few only) **PERICOM** RS232 mono video terminals ideal for Packet/Modem ONLY £40 each inc. P&P **TRIO** KW4000A 144/432 MHz FM Mobile Transceiver 25 Watts £375 + £5 P&P **KENWOOD** TS520 7 Band HF Transceiver 100 Watts O/P £375 + £10 P&P **EPSON** HX20 portable computer with tape drive, printer and 32Kb memory £195 + £6 P&P.

ALL MAJOR CREDIT CARDS ACCEPTED.

SPECTRUM OWNERS

No more waiting for programs to load, switch on and your program is ready to use!!

We are now able to supply our Spectrum programs on EPROM, together with a suitable EPROM loader board and all hardware housed in one unit.

The many advantages are too numerous to mention here. Please contact us for details. An SAE would be appreciated.

NOW available for all versions of the Spectrum.

J.B.P. ELECTRONICS LTD.

VISA

Unit 45, Meadowmill Estate, Dixon Street, Kidderminster DY10 1HH Tel: (0562) 753893



VISA

G4ZPY PADDLE KEYS

Stockist of the A.E.A. Morse Machine MM-3.

We MAKE and sell only the FINEST quality Equipment.

Send for our illustrated brochure 4 x 9" SAE to:

41 Mill Dam Lane, Burscough Ormskirk, Lancs L40 7TG. Phone No. (0704) 894299. **SEE US AT LEICESTER**



Strikalite

Laurel Drive, Rugeley Road, Burntwood, Staffs WS7 9BL. Tel: (05436) 3122

Rechargeable batteries and chargers.

Sealed lead, acid and nickel cadmium.

Battery packs to customers specification.

Full range of chargers available.

SEE YOU AT LEICESTER

EVERY ISSUE OF

SHORT WAVE MAGAZINE

IS FOR BROADCAST, AIRBAND, SCANNING AND WEATHER SATELLITE ENTHUSIASTS.

OCTOBER ISSUE ON SALE NOW.

Whilst prices of goods shown in advertisements are correct at the time of going to press, readers are advised to check both prices and availability of goods with the advertiser before ordering from non-current issues of the magazine

Service Sheets and Servicing

Wanted

Valves

VALVES FOR AUDIO, INDUSTRY, Receiving & Transmitting. Rare and obsolete types a speciality! Special prices for wholesale quantities. Orders from Gvt. Depts., PLCs, overseas etc. welcome. Also CRT, IC, Klystrons, Magnetrons, Transistors, USA valves etc. RETAIL: Minimum order £20: Phone or Fax for immediate quote. Discounts for quantity. Phone (0403) 865105 Fax (0403) 865106. Min order £20. Visa and Access accepted. BILLINGTON VALVES, Eokendale Ind. Est., Cowfold, Nr.Horsham, Sussex RH13 8AZ. (callers by appt only). Office hours Mon-Fri 9am-5.30pm.

MASTERCARD 76 Church St., Larkhall, Lanarkshire ML9 1HE **EUROCARD**
Immediate quotes - Phone 0698 884585 Mon-Fri 9-5, 0698 883334 any other time
IMMEDIATE DESPATCH OF ALL Phone Orders by ACCESS, VISA etc. or to Listed Customers

WORLD'S LARGEST COLLECTION OF SERVICE MANUALS ... from £3.50 to £50 ... Most unavailable elsewhere
 Every issued **FULL SIZE ERVICE SHEET** in stock; **CTVs** or **Combinations £3.50/Singles £2.50 Plus :SAE**
LSAE for any Quotation, plus huge FREE Catalogue, STREE Review, Pricelists, etc.
 For £3 ... **Comprehensive Service Manuals & Sheets Catalogues PLUS 1989 Chassis Guide & £4 Vouchers**
Spectrum Repair & Service Guide £5.00. **Video Recorders Service Guide 3rd Ed £20.00**
Giant Collection of 10 Huge Binders covering all main CTVs to end 1989, (FREE Updating) £265

Tel: (0480) 214488 (anytime) 216870 (eves).

SESCOM, INC.
2100 WARD DR.
HENDERSON, NV. 89015 U.S.A.
(702) 565-3400 FAX (702) 565-4828

ORDER FORM PLEASE WRITE IN BLOCK CAPITALS

I enclose Cheque/P.O. for £.....(42p per word, please add 15% VAT to total). Rates and Postal Address at top of page.
(Cheques and Postal Orders should be made payable to Practical Wireless).

CATEGORY HEADING

Name

Address

[illegible]

Computer Soft/w & Hard/w

COMMODORE COMPUTERS (+4, C16, 64, 128). "MICROCOM" cw/rty tx/rx with superb Morse tutor. "TURBO LOG" ultimate high speed station log. "MICROCOM INTERFACE" ready built. S.A.E. to: Moray Micro Computing, Enzie Slackhead, Buckie, Moray, AB5 2BR. (Tel. 0542 7384).

IBM/COMPATIBLE SHAREWARE CATALOGUE, 7000+ files, wordprocessors, spreadsheets, communications, Ham & games. Send £1.50 or 2 disks & return postage. AK SHAREWARE, 54 Sheldrake Road, Christchurch, Dorset BH23 4BP.

ATARI 520/1040/STE MORSE MASTER Complete CW tutor for novices and professionals. Send/receive under realistic on air conditions. complete with cable. £29.99 from **BOSCAD LTD**, 16 Aytoun Grove, Baldridgeburn, Dunfermline, FIFE KY12 9TA. For info Tel: (0383) 729584, evenings.

IBM/PC SOFTWARE DIRECT FROM THE AUTHOR. Scanner memory manager database £15, utility stations database, Morse tutor £5 each (see Backscatter August '90 for review) s.a.e. for details. Price includes P&P. Cheques payable to Trevor Rowell. BOX No. 22. PW Publishing Ltd, Enefco House, The Quay, Poole, Dorset BH15 1PP.

COMMODORE 64 HAM PROGRAMS. 4 disk sides £5.99. 8 disk sides £8.99. SOFT 64. P.O. BOX 465, BELFAST BT6 8PN

Educational

ELECTRONICS WORKSHOP Repairs, rebuilds, modifications, advice. Specialists in valve equipment. See also PAYL School, Green, G1NAK Chylean, Tintagel, Cornwall. Tel: (0840) 212262.

R.A.E. PAY AS YOU LEARN Correspondence. £2 per lesson includes tuition. See also Electronics Workshop. Green, C. Eng., M.I.E.E. Chylean, Tintagel, Cornwall. Tel: (0840) 212262

Antennas

VERSATOWER P60, Kenpro Rotator, Ropes, Winches, Cables, Cables and Antenna items. £675.00. (0837) 82354 (Devon).

Scanning

PRO 2004/5/6 PS90 MODULE. Searches - memorises - recalls automatically. Reviewed PW/SWM. Details S.A.E. G31ES BRISTOL 500742.

Veteran & Vintage

THE VINTAGE WIRELESS BOOK LISTING. Published regularly containing 100s of out of print, old and collectable wireless and T.V. books, magazines etc. Send three first class stamps for next copy or £1.75 for next 4 issues. **WANTED**, Pre-1960 wireless books, magazines, catalogues, any printed material or Ephemer relating to wireless. CHEVET BOOKS, 157 Dickson Road, Blackpool, Lancashire FY1 2EU. Tel: (0253) 751858

SERVICE MANUALS from £0.50

Sony CD Player SL-P1	£2.00
Sony CD Player SL-P2	£2.00
Sony CD Player SL-P3	£2.00
Sony CD Player SL-P8(K)	£1.50
Sony CD Player SL-PJ1	£2.00
Sony Turntable System SL-BD2	£0.50
Sony Turntable System SL-B21	£1.00
Sony Turntable System SL-BD3	£1.00
Sony Turntable System SL-D310(K)	£0.50
Sony Turntable System SL-D4(K)	£1.00
Sony Turntable System SL-J1	£1.00
Sony Turntable System SL-J11	£1.00
Sony Turntable System SL-QD2	£1.00
Sony Turntable System SL-QL5(K)	£1.00
Grundig VCR 2x4 plus GB	£3.50
Pye CTV 7225, 7227, 3150 & 7323	£3.00

Others available from 50p. send large s.a.e. Cheques payable to PWP Ltd. Box No. 21. PW Publishing Ltd., Enefco House, The Quay, Poole, Dorset BH15 1PP.

Components

QUARTZ CRYSTALS and FILTERS

Large numbers of standard frequencies in stock for amateur, CB, professional and industrial applications. Stock crystals £5.50 each (inc. VAT and UK post). Any frequency or type made-to-order from £5.50. Phone or SAE for lists.

GOLLEDGE ELECTRONICS
Merriott, Somerset, TA16 5NS
Tel: (0460) 73718

J. A. B. The new name in Mail Order. Electronic and R. F. Components, with an evening telephone service. Catalogue 50p (Refunded on first order) from: JAB 76 Wensleydale Road Greatbarr, Birmingham B42 1PL.

TOROIDAL CORES, FERRITE BEADS, send 50p for catalogue to: FERROMAGNETICS PO Box 577 Mold, Chwyd, N. Wales CH7 1AH.

Miscellaneous

G2VF LOOP ANTENNAS COMPLETE WITH ATU FOR H.F. HAM RADIO BAND TRANSMISSION (SWR One to One 40, 15 and 10 and One Point Five to One 80 and 20) AND SWLS AND LONG AND MEDIUM WAVE BANDS FOR BCLs. Loops 21 inches square or triangle. No special skills required. Circuits, Parts Lists with sources of supply assembly data. **HIGH FREQUENCY LOOP** 80 to 10 Metres **ES. LONG AND MEDIUM WAVE LOOP** for BCLs **ES. LONG WAVE MEDIUM WAVE AND SHORT WAVE LOOP** 1500 to 10 Metres FOR THE BCL AND SWLS. **SHORT WAVE ATU FOR LOOP OR LONG WIRE ANTENNA** **ES. SHORT WAVE ATU BUILT IN PRE AMP FOR LOOP OR LONG WIRE** **ES. Pre-amp LW, MW and SW** **ES. MW LOOP with pre amp ATU** **ES. PRE AMP FOR G2VF HF Loop or ATU** **ES. SAE details**. All projects DIY. Metal Detector **ES. PhotoCopy HRO manual** **ES. F.G. Rylands**, 39 Parkside Avenue, Millbrook, Southampton SO1 9AF Tel: (0703) 775064.

HEATHKIT U.K. Spares and Service Centre. Cedar Electronics Unit 12, Station Drive, Bredon, Tewkesbury, Glos. Tel: (0684) 73127.

NOTICE TO ADVERTISERS

Would intending and existing advertisers please note that *Practical Wireless* has an editorial policy not to accept advertising for surveillance and 'bugging' transmitting and receiving equipment, or any other equipment which cannot legitimately be used within the UK.

For Sale

USED SCOPES, SIG. GENS, METERS, P.S.Us. Many bargains in our walk-round store. COOKE INTERNATIONAL, Unit 4 Fordingbridge Site, Main Road, BARNHAM, Bognor Regis, West Sussex, PO22 0EB. Tel: (0243) 545111.

MORSE DECODER KITS. Alphanumeric L-C 16 character display. Decodes at almost any speed. Centre tone and maximum tone deviation adjustable. Requires 2x7 v.a.c. or 9-12 v.d.c. Complete kit less case. Cheque or P.O. for £59.95 to: PETER MANN, 22 Cresswell Drive, Cottesmore, Oakham, Leicestershire LE15 7DY.

COMMERCIAL SOLID - STATE

H.F. Linear Amplifiers.

1kW output continuous duty all modes. Complete units incorporating: Aerial filter, Amplifier A.C. P.S.U. tested. As new and unused. Further details phone **PETER (0642) 242546** Office hours only

MITSUBISHI VIDEO PRINTER P-50B brand new £299, bargain provides hard copy text/video image on 4.5" thermal paper via decoder/computer video camera. Record/Teletext, DXTV, WXFax, RTTY, CW. Tel: (0628) 482726. From 19.30pm.

TEKTRONIX 7704 OSCILLOSCOPE 150MHz, Dual Trace, delayed timebase, spare plug ins, current probe, 12kV probe, camera, trolley, £350 ono. (0342) 824501 (Sussex).

AR88 (LF) Offers in region of £50. Telephone: 051-486 4064.

ICOM IC32E Dual Band handheld transceiver, £300.00 ono. **YAesu FT790R2** Multimode portable transceiver, £350.00 ono. Both items new this year. Tel: (0252) 547564.

ICOM 735 with AT150 Automatic Antenna Tuner, both mint condition, still boxed. £875 ono. Telephone: (0386) 552277.

RCS VARIABLE VOLTAGE D.C. BENCH POWER SUPPLY 1 to 24 volts up to 0.5 amp. 1 to 20 volts up to 1 amp. 1 to 16 volts up to 1.5 amps. D.C. Fully stabilised. Twin panel meters for instant voltage and current readings. Overload protection. Fully variable. Operates from 240V A.C. Compact Unit: size 9 x 5.5 x 3ins.

£42 incl. VAT + Post £2. **NEW MODEL** Up to 36 volts DC at 5amp. 10 amp peak. Fully variable. Twin Panel Meters. Size 14.5 x 11 x 4.5in. **£36** inc. VAT. Carr £5. **RADIO COMPONENT SPECIALISTS** 337 Whitehorse Road, Croydon SURREY, U.K. Tel: 081-684 1665 List, Large S.A.E. Delivery 7 days. Callers Welcome. Closed Wednesday

144MHz to 2500MHz Cavity Wavemeter.

One Wavemeter to cover the VHF/UHF Bands 144MHz to over 2500MHz. Don't get caught without one.

Write to: P. Sergeant G4ONF, 6 Gurney Close, Costessey, Norwich. Tel: (0603) 747782



100Hz WAVEMETER KIT



144-2500MHz WAVEMETER

INDEX TO ADVERTISERS

AH Supplies	32
ARE Communications	8, 9
Aerial Techniques	64
Amateur Radio Communications	37
Anchor Surplus	64
Arrow	10, 11
Birkett, J.	64
Bredhurst Electronics	57
Cap.Co	69
Castle Electronics	44
Characteristics	74
Cirkkit	13
Colomof	64
Datamarch	50
Datong	44
Dewsbury	31
Dressler Communications	28
EMP	58
ERA	58
Elliott Electronics	58
G4ZPY	77
Henrys Audio	37
Hoves C.M. communications	14
ICS Electronics	17, 21
ICS Intertext	44
Icom (UK)	2, 3, Cover iii
J & P Electronics	77
KW Communications	49
Lake Electronics	44
Langrex Supplies	48
Leicester ARS	39
Lee Electronics	22

Maplin Electronics	Cover iv
Marc Trading	37
Martin Lynch	14, 53
Nevada	32
Photo Acoustics	63
Qualites Radio	48
Quartslab	14
RAS Nottingham	57
R & D Electronics	53
RN Electronics	48
RSGB	50
RST Valve	48
Radio Shack	80
Rapid Results College	57
Random Electronics	64
Raycom	27
SGC	53
SRW Communications	58
Short Wave Magazine	77
Siskin	32
Sitek	77
South Midlands Communications	Cover ii, 4, 5, 6
Stephens James	64
Strikalite	77
Syon Trading	57
Tandy	7
Technical Software	77
Total Communications	74
Ward Reg & Co	69
Waters & Stanton	12

YOUR LOCAL DEALERS

<p>SOUTH WALES</p> <p>ELECTRO MART</p> <p>Receivers, Scanners, Howes, ERA, CB, Marine radio etc. part exchange welcome.</p> <p>96 High St, Clydach, Swansea Tel: 0792 842135</p>	<p>DERBYSHIRE</p> <p>BADGER BOARDS QUALITY PCB's MULTIPLE or SINGLES</p> <p>Please send S.A.E. for information or write for quotation to:</p> <p>BADGER BOARDS 87 Blackberry Lane Four Oaks, Sutton Coldfield B74 4J or 021 353 9326</p>	<p>TO FILL THIS SPACE CALL:</p> <p>0202 676033</p>	<p>DERBYSHIRE</p> <p>RILEY'S T.V. SERVICES LTD. SUPPLIERS OF:- SCANNERS — C.B. 27-934 MHZ — AERIALS — TEST METERS — TOOLS — TELEPHONES KITS AND CABLES</p> <p>125 LANGWITH ROAD HILLSTOWN CHESTERFIELD S44 9SP PHONE 0246 826578 CLOSED WEDNESDAY</p>
<p>HERNE BAY</p> <p>ICOM</p> <p>ICOM (UK) LIMITED The Official Icom Importer Unit 8, Sea Street Herne Bay, Kent CT6 8LD Tel: 0227 369464 Fax: 0227 360 155 Open Mon-Fri 9 am-5.30 pm (Lunch 1-2.00 pm)</p>	<p>SOUTHAMPTON</p> <p>South Midlands Communications Official Yaesu Importer</p> <p>S.M. House, School Close, Chandlers Ford Industrial Estate, Eastleigh Hants SO5 3BY. Tel: 0703 255111</p>	<p>PORTSMOUTH</p> <p>Nevada Communications Importers of the Nevada range of 934MHz equipment</p> <p>189, London Road, North End, Portsmouth, Hants, PO2 9AE Tel: 0705 662145</p>	<p>DEVON</p> <p>Reg. Ward & Co. Ltd. The South-West's largest amateur radio stockist. Approved dealer for Kenwood, Yaesu and Icom</p> <p>1 Western Parade, West Street, Axminster, Devon, EX13 5NY Tel: 0297 34918 (Closed 1:00-2:00 and all day Monday)</p>
<p>BUCKINGHAMSHIRE</p> <p>Photo-Acoustics Ltd. Approved Kenwood, Yaesu and Icom dealer (part exchange always welcome)</p> <p>58 High Street, Newport Pagnell, Buckinghamshire MK16 8AQ Tel: 0908 610625 (Mon-Fri 9:30-5:30, Sat 9:30-4:30)</p>	<p>SOUTH WALES MAIL ORDER RETAIL</p> <p>A.C.S. SYSTEMS PACKET RADIO: ST-PC-AMIGA COMPUTERS AMATEUR SOFTWARE FOR MOST COMPUTERS SATELLITE TELEVISION SYSTEMS</p> <p>ICS DEALER FOR DATA COMMUNICATIONS</p> <p>19, CILHAU TERRACE, MOUNTAIN ASH, MID GLAMORGAN SOUTH WALES, CF45 3ND. TEL 0443 470040 CALLERS BY APPOINTMENT 9am-5pm Mon-Sat</p>	<p>WEST SUSSEX MAIL ORDER RETAIL</p> <p>BREDHURST ELECTRONICS LTD. High St, Handcross, West Sussex Tel: (0444) 400786</p> <p>Situated at the Southern end of M23. Easy access to M25 and South London. Open Mon-Fri 9am-5pm except Wed 9am-12.30pm. Sat 10am-4pm.</p>	<p>YORKSHIRE YAESU ICOM Kenwood</p> <p>Alan Hooker Radio Communications 42, Netherhall Road, Doncaster. Tel: 0302 325690 Open Mon-Sat 10-5pm Closed Thursdays</p>
<p>EAST YORKSHIRE</p> <p>"Characteristics" FOR YOUR AMATEUR RADIO AND CB REQUIREMENTS GOOD PRICES GIVEN FOR YOUR SURPLUS EQUIPMENT OPEN SUNDAY</p> <p>44, Hilderthorpe Road Bridlington YO15 3BG Telephone 0262 673635</p>	<p>CORNWALL 24hrs, 7 Days a Week</p> <p>SKYWAVE RADIO AMATEUR & MARINE COMMUNICATIONS SERVICES ICOM, YAESU, NAVICO JAYBEAM, Etc.</p> <p>47 Trevarthian Road, St. Austell, Cornwall PL25 4BT Tel: 0726 65418 Voice Bank: 0426 961909</p>	<p>PLEASE MENTION PRACTICAL WIRELESS WHEN REPLYING TO ADVERTISEMENTS</p>	<p>SOUTH YORKSHIRE</p> <p>P.A. Electronic Supplies</p> <p>NEW COMPONENTS KITS TRANSISTORS I/C AND SURPLUS EQUIPMENT MAIL ORDER CATALOGUE SEND CQ/PO FOR £1.50</p> <p>96 Rawmarsh Hill Parkgate Rotherham South Yorks S62 6EX</p> <p>Open Six Days Mon to Sat Phone (0709) 527109</p>

RADIO SHACK AT LEICESTER SHOW

We will be at our usual stand No. 61 at this year's Leicester Amateur Radio Show. For those of you who want a pedigree transceiver there may still be a Collins, but we have no axe to grind and will sell you anything from Icom, Kenwood and Yaesu to name but a few.

Do you want a new computer? We can also supply you with almost anything that takes your fancy and take in your amateur gear in trade!

Come along and talk to us

IC-R1	£399	AR-800E	£169	HF-225	£425
IC-R100	£499	AR-900E	£199	R-5000	£875
IC-R72	£645	AR-950E	£249	PRO-38	£99
IC-R7000	£895	AR-1000	£249	PRO-34	£199
IC-R9000	£3995	AR-2002	£487	PRO-2005	£299
FRG-8800	£639	AR-3000	£765	HP-100E	£249
FRG-9600	£495	R-535	£249	BC-200XLT	£229

RECEIVING and TRANSMITTING Equipment by

ICOM, KENWOOD, YAESU, JUPITER, FAIRMATE and all LEADING MANUFACTURERS. COMPUTERS by TANDON, PHILIPS, CAMBRIDGE, TANDY and OTHERS, ALL SOFTWARE.

MAIL ORDER & EXPORT A PLEASURE

73s — Terry G3STS
COME AND GET A BARGAIN!



RADIO SHACK LTD

(Just around the corner from West Hampstead Station on the Jubilee Line)

Giro Account No. 588 7151 Fax: 071-328 5066 Telephone: 071-624 7174

188 BROADHURST GARDENS,
LONDON NW6 3AY



ICOM

Count on us!

LISTEN TO THE WORLD IN DETAIL

IC-R9000 COMMUNICATIONS RECEIVER



The world is now at your fingertips with ICOM's elite new IC-R9000, a communications receiver truly in a professional class all of its own. With the IC-R9000's continuous all mode, super wideband range of 100KHz to 1999.8MHz, ICOM's unique CRT display and numerous scan functions, local and distant spots on the globe are now within earshot in one single receiver.

The IC-R9000's versatile receive capability allows you to receive many different mode signals. Listen to AM used by broadcast stations and VHF airband. Use SSB (U.S.B./L.S.B.) and CW to receive Commercial and Amateur stations on shortwave.

Tune into CB (Citizen Band), Marine and Amateur stations using FM or use wide

FM to receive FM broadcast stations and TV signals. FSK (Frequency Shift Keying) is also built in for receiving RTTY from news agencies. With an advanced range like this you'll have no trouble in hearing stations near to home or on the other side of the planet.

Watch the IC-R9000? Using your TV set or video recorder with a video input connector, you can receive VHF and UHF TV broadcasts. Also the built in CRT can display ATV (Amateur Television) on both the 430 and 1200MHz amateur bands. With the introduction of the IC-R9000 you now have the technical quality required to enjoy HF, VHF and UHF communications. For more detailed information contact your local ICOM dealer.

icom (UK) Ltd.

Dept PW, Sea Street, Herne Bay, Kent CT6 8LD. Tel: 0227 363859. 24 Hour.

Helpline: Telephone us free-of-charge on 0800 521145. Mon-Fri 09.00-13.00 and 14.00-17.30. This service is strictly for obtaining information about or ordering Icom equipment. We regret this cannot be used by dealers or for repair enquiries and parts orders. thank you

Datapost: Despatch on same day whenever possible.

Visa & Mastercards: Telephone orders taken by our mail order dept. instant credit & interest-free H.P.



1991 BUYER'S GUIDE TO ELECTRONIC COMPONENTS

Maplin

FEATURING:
AN ELECTRONICS
CAST OF
THOUSANDS!

POWER-PACKED
WITH OVER
600 PAGES!!

STARRING
HUNDREDS OF
NEW PRODUCTS
AT SUPER
LOW PRICES!

**SHOWING
NOW!**

at your local
WHSMITH

PERFORMANCES DAILY
At your local branch
of WHSMITH

ONLY £2.45

Order you copy of the New MAPLIN Catalogue on sale NOW
Pick up a copy from any WHSMITH for just £2.45 or post this coupon now to receive your
copy for just £2.45 + 50p p&g. If you live outside the U.K. send £4.85 or
20 International Reply Coupons. I enclose £2.95.

Name _____
Address _____
Post Code _____
Send to Maplin Electronics,
P.O. Box 3, Rayleigh,
Essex SS6 8LX.
PW91