

FEATURES

- Low output THD
- Unique overload protection
- Remote programming



CLEAN AC POWER WITH MICROPROCESSOR CONTROL AND VACUUM FLUORESCENT DISPLAY

In the P1352 you'll find the quality features you expect from Behlman; fully adjustable voltage and frequency, low-output THD, high efficiency, plus excellent line and load regulation. There's also a unique overload protection system that folds back voltage to maintain rated current without output waveform distortion. The unit can be controlled with the front panel pushbuttons or remotely using the standard RS232 interface.

Available options include IEEE-488 interface, extended frequency range, 45 Hz to 1000 Hz and rack mount kit.

Small size, quiet operation and high efficiency make the P1352 ideal for industrial product testing, precision avionic test, power conversion and Automatic Test Equipment testing.

INPUT

Voltage: 120 VAC, +/- 10%
Frequency: 47-440 Hz

OUTPUT

Power: 1350 VA
Voltage: 0-135 V or 0-270 V
Frequency: 45-500 Hz (Option E: 45-1000 Hz)
Current: 10 Amps, 0-135 V Range,
 5 Amps, 0-270 V Range
Current limit: Settable from 0 to maximum amps
Crest Factor: 3:1
Power Factor: 100% of rated output into any
 power factor load
Distortion: 1.0% THD typical, measured at full load,
 115 Volts, 60 Hz
Line Regulation: +/- 0.1% for +/- 10% line change
Load Regulation: +/- 0.7%, no load to full load
Efficiency: 80% typical

PROTECTIVE CIRCUITS

Input: Fuse
Constant Current: Overload automatically causes voltage
 fold-back to provide maximum current
 without distorting output waveform
Short Circuit: Short circuit overload electronically
 latches output open to protect load...
 power restored by recycling input power
Thermal: Internal temperature sensor prevents
 heat damage
Over voltage: Voltage in excess of 20% of maximum
 electronically latches output to protect
 load... power restored by recycling input
 power

CONTROLS / INDICATORS

Power On/Off: Rocker type switch
Display: Vacuum fluorescent display with 24
 characters x 2 lines...displays volts,
 amps, frequency and current limit...
 fault indication for over voltage
 O/V, over current (O/I), over
 temperature (O/T), constant current
 (C/C) and overload latch (O/L),
 Watts (W), power factor (PF)
Shift push-button: Set resolution; 0.1, 1.0, 10.0, 100.0
Mode push-button: Selects the parameter required
Up push-button: Increment up
Down push-button: Increment down
Reset: Reset system to default setting
Output On/Off: Push button switch
Range: Push button switch (High/Low)
Local/Remote: Recessed slide switch
Indicators: Output on, high range, busy
Remote interface RS232 interface
Settings and measurements: See Table 1 (reverse)

MECHANICAL & ENVIRONMENTAL

Dimensions: High-strength bench top chassis
 with removable rubber feet,
 3.5"H x 17"W x 17.5"D
 (8.9 cm x 43.2 cm x 44.5 cm)
Weight: 39 lbs (17.6kgs),
Operating Temperature: 32° to 131° F (0° to 55° C)
Input Connections: IEC320 C-20 receptacle with six-
 foot line cord with NEMA 5-15 plug
Output Connections: Enclosed terminal block
Remote control: DB-9 connector

Table 1: P1352 Settings and Measurements


	Setting Resolution	Setting Accuracy	Measurement Accuracy
Voltage	0.1 V	+/- 0.3% of full scale +/- 0.1 V	+/- 0.3% of full scale +/- 0.1 V
Frequency	0.1 Hz	+/- 0.01 Hz	+/- 0.1 Hz
Current	NA	NA	+/- 1% of full scale +/- 0.1 A
Current Limit	0.1 A	+/- 0.2 A	+/- 0.2 A
Watts	NA	NA	+/- 2.5% of full scale (150 W to FS)
Power Factor	NA	NA	+/- 0.035 (150 W to FS)

Fault indications for the following:

O/V: Over Voltage
O/I: Over Current
O/T: Over Temperature
C/C: Constant Current
O/L: Overload latch

OPTIONS: *Contact factory for additional options.*

E: Extended frequency range, 45-1000 Hz
I: IEEE-488 interface
RM: Rack Mount kit
ET: Ethernet interface
USB: Adapter for USB to serial port

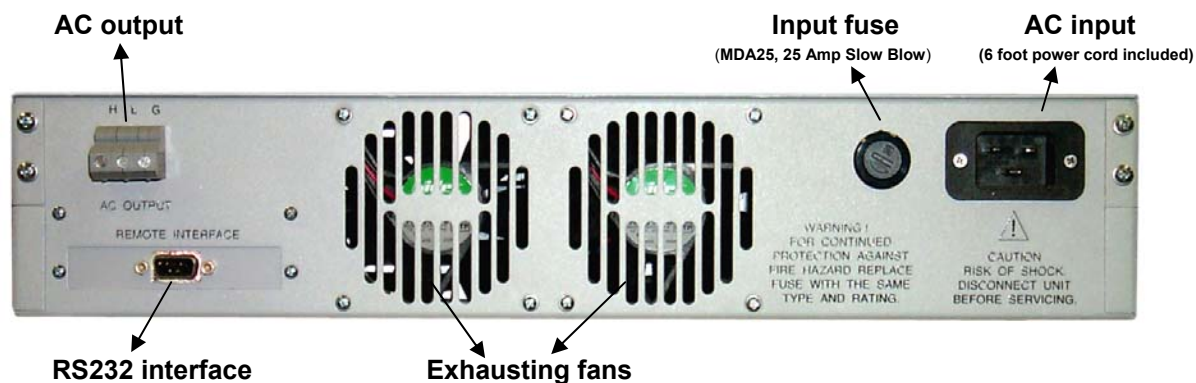

www.behlman.com

ORBIT POWER GROUP
Behlman Electronics

Headquarters:
80 Cabot Court, Hauppauge, NY 11788
631 435-0410 800 874-6727
Fax: 631 951-4341

2363 Teller Road, Suite 108
Newbury Park, CA 91320
805 375-7046 800 456-2006
Fax: 805 498-2147

sales@behlman.com