



INSTRUCTION SHEET

RF DIRECTIONAL THRULINE[®] PRECISION POWER SENSORS 4027A SERIES

Specifications

CAUTION

Changing the sensor's connectors will invalidate calibration data, and may reduce the maximum power rating of the unit.



Frequency Range	
4027A250K	250 – 400 kHz
4027A400K	400 – 550 kHz
4027A800K	800 – 950 kHz
4027A2M	1.5 – 2.5 MHz
4027A4M	3 – 5 MHz
4027A10M	10 – 15 MHz
4027A12M	10 – 15 MHz
4027A25M	25 – 30 MHz
4027A35M	35 – 45 MHz
4027A60M	45 – 65 MHz
4027A100M	95 – 105 MHz
4027A150M	150 – 170 MHz
RF Power Range	
4027A12M	300 mW – 1 kW
4027A25M	3 W – 9 kW
4027A35M	3 W – 7.5 kW
4027A60M	3 W – 6 kW
4027A100M	3 W – 4 kW
4027A150M	3.75 W – 3.75 kW
All other models	3 W – 10 kW
Accuracy, Fwd, Best Case *	± 1.0% (1σ)
Accuracy, Reflected	Calculated from Fwd accuracy and power $\text{RFL Accuracy} = \text{FWD Accuracy} + \frac{\text{FWD Power}}{10 \text{ Directivity}/10}$
Accuracy, VSWR	Calculated from Fwd and Rfl power $\text{VSWR} = \left(1 + \sqrt{\frac{P_R}{P_F}}\right) / \left(1 - \sqrt{\frac{P_R}{P_F}}\right)$
Repeatability, Multiple Measurements, Single Sensor	Determined by connector repeatability ± 0.3% (2σ) with female “N” connectors

- * For rated accuracy, no more than 1% AM; Harmonics –50 dBc or less
Derate accuracy by 1% (1σ) outside cal. power or cal. frequency
Derate accuracy by 1% (1σ) below 15 °C and above 35 °C

VSWR, Max	1.05:1
Insertion Loss, Max	0.05 dB (with female “N” connectors)
Directivity, Min	
4027A12M	30 dB
All other models	28 dB
Impedance, Nominal	50 ohms
Max. Allowable Terminating VSWR	2.00:1
Calibration Technique	Frequency-specific calibration factors stored in nonvolatile memory in each sensor. Sensor output corrected for frequency and temperature within specified ranges.
Calibration Frequencies, Typical (MHz) *	
4027A250K	0.25, 0.40
4027A400K	0.40
4027A800K	0.90
4027A2M	1.8, 2.0, 2.17
4027A4M	4.0, 5.0
4027A10M	10.0, 13.56, 15.0
4027A12M	10.0, 13.56, 15.0
4027A25M	25.76, 27.12, 28.48
4027A35M	40.68
4027A60M	55.0, 60.0
4027A100M	95.0, 100.0
4027A150M	162.0
Cal Power, Typical	
4027A12M	700 W
All other models	1700 W
Cal Cycle, Nominal	6 months

* Other calibration frequencies available upon request

Connectors	Customer specified from “QC” list, appropriate for frequency and power.
Operating Power	Supplied by power meter via sensor cable
Sampling Rate, Nominal	2 readings / second
Temperature	
Operating	0 to 50 °C (32 to 122 °F)
Storage	–20 to +70 °C (–4 to +158 °F)
Humidity, Max	95% (non-condensing)
Altitude, Max	10,000 ft. (3,000 m)
CE	CE Compliant. Refer to Declaration of Conformity for specific standards
Dimensions, Nominal	5.2”L x 2.5”W x 3.25”H (137 x 64 x 83 mm)
Weight, Nominal	1 lb. 13 oz. (0.8 kg)

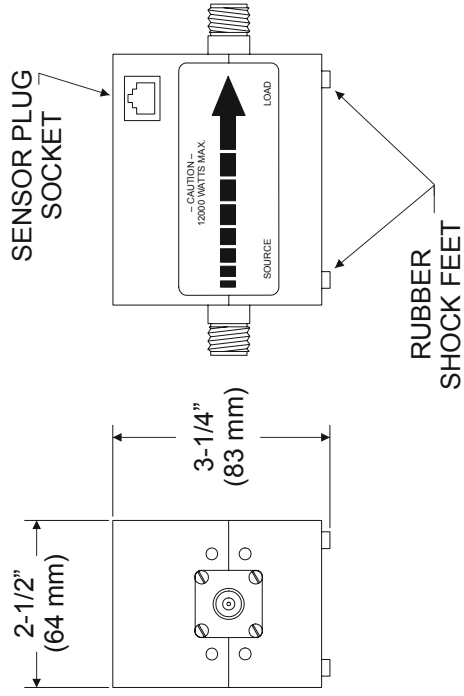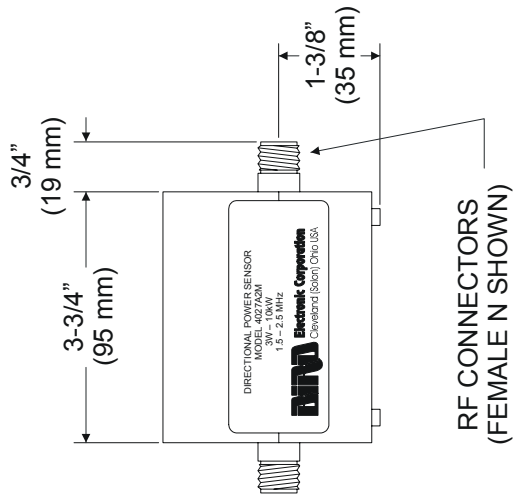

DECLARATION OF CONFORMITY

Manufacturer: Bird Electronic Corporation
30303 Aurora Road
Cleveland, Ohio 44139-2794

Product: Directional Power Sensors

Models: 4027A2M 4027A4M 4027A10M 4027A12M
4027A25M 4027A35M 4027A60M 4027A100M
4027A150M 4027A250K 4027A400K 4027A800K

The undersigned hereby declares, on behalf of Bird Electronic Corporation of Cleveland, Ohio, that the above referenced products, to which this declaration relates, are in conformance with the provisions of the following standards.

- European Standard EN 61326-1:1997 - Electronic Equipment for Measurement, Control and Laboratory Use - EMC Requirements

These standards are in accordance with EMC Directive (89/336/EEC).

- European Standard EN 61010-1:1993 - Safety Requirements for Electrical Equipment for Measurement, Control, and Laboratory Use: Including Amendment 2: 1995

This standard is in accordance with Low Voltage Directive (73/23/EEC), 1973 Including Amendment (93/68/EEC), 1993

The technical documentation supporting compliance with these directives is maintained at Bird Electronic Corporation, 30303 Aurora Road, Cleveland, Ohio 44139.



Bob Gardiner
Director of Quality
Bird Electronic Corporation

Special Lifetime Warranty – Series 4027A Power Sensor Head

In addition to its standard warranty, the Bird Electronic Corporation warrants its Series 4027A Thruline® Power Sensor Heads for lifetime to original purchaser. This extended warranty is against burnout. For the warranty to apply, the Sensor Head must be used with the correct Bird Electronic Corporation Display Unit, the maximum power rating of the Sensor must not be exceeded, the Sensor RF circuit must be properly terminated and the Sensor not subjected to physical abuse.

Bird Electronic Corporation, at its option, will repair or replace the defective Sensor at its world Headquarters at 30303 Aurora Road, Solon, Ohio 44139.

The customer is responsible to pay transportation charges to return the defective sensor to Bird.