


Agilent
N2002A Noise Source Test Set
10 MHz to 26.5 GHz

Technical Overview

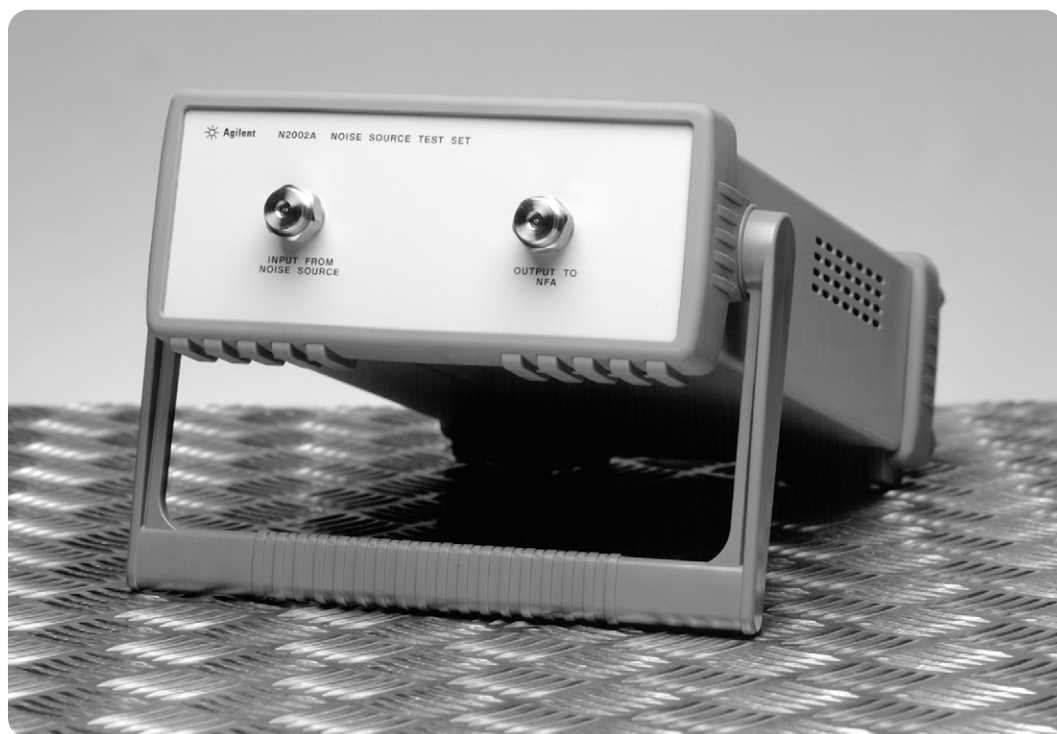

Agilent Technologies

Noise Source Calibration

One of the key performance parameters for noise figure is the level of measurement uncertainty. A significant contributor to this is the uncertainty surrounding the noise source used when measuring noise figure on your device. Accurate noise source calibration is critical to minimizing noise source uncertainty, and thus a critical factor for obtaining quality noise figure measurements. The Agilent N2002A noise source test set is a stand-alone instrument that operates as an integral part of a noise source calibration system. The low cost, easy-to-use N2002A, as part of a calibration system, helps deliver fast, accurate, repeatable calibration results with minimal levels of uncertainty.

Agilent recommends using the N2002A noise source test set together with the Agilent N8975A noise figure analyzer (NFA)¹ as the core equipment to perform fast and accurate noise source calibrations. The N2002A provides isolation between the noise source and the NFA to minimize the reflection coefficient. This coefficient contributes to reflections between the DUT and the source, causing uncertainty in the noise power emerging from the source; the measured noise figure refers to the actual noise source impedance, rather than the desired 50-ohm value. Incorporating the N2002A into a calibration system will minimize the interaction between the DUT and the NFA, thus minimizing the reflection coefficient and thereby ensuring measurement results with reduced measurement uncertainty. The result is more accurate noise source calibrations. Measurements made with an accurate noise source allow for greater confidence and tighter specifications of the device being tested.

The N2002A will be of particular interest if

- you and your company would benefit from completing noise source calibration in-house, but previously found it too expensive or complex
- you already perform noise source calibration with the Agilent N8975A NFA but would benefit from the improved accuracy provided by the N2002A test set
- you already perform noise source calibration, without the N8975A, but would benefit from the improved speed and accuracy provided by the N2002A test set and N8975A NFA combination.

In-house calibration

Many customers have long equated noise source calibration with the time consuming and expensive delays of sending equipment to external laboratories or test houses. The straightforward operation and low cost of Agilent's recommended noise source calibration equipment make the prospect of in-house calibration more appealing due to the drastic reduction in manufacturing downtime and the long-term financial advantages.

Incorporating the N2002A into an existing noise source calibration system

For engineers who currently run their own noise source calibration service, the N2002A noise source test set is an ideal addition to their test equipment. Incorporating this low-cost, self-contained unit into an existing noise source calibration system can significantly improve the quality of calibrations. With existing systems the noise source test set can be incorporated between the noise source and the noise figure measuring device to reduce reflections and therefore reduce the level of uncertainties.

N2002A key features and benefits

Features

- Reduces noise figure uncertainty thus ensuring accurate and repeatable results
- Operation over a frequency range of 10 MHz to 26.5 GHz
- Results traceable to a national standard
- Full calibration of Agilent SNS and 346 noise sources, as well as other manufacturers' noise sources
- Manual control or remote operation using GPIB

Benefits

- Ensures accuracy of noise source calibration systems, enabling greater confidence in and tighter specifications of the device under test
- Provides speed and accuracy when combined with the N8975 noise figure analyzer, resulting in increased throughput
- Cost-efficient solution for on-site calibration, which minimizes downtime

1. Agilent recommends that the N2002A noise source test set be used in conjunction with Agilent equipment, however test and measurement equipment from other manufacturers can also be used.

Noise Source Calibration System

Note: The N2002A noise source test set must be used within a noise source calibration system; the N2002 has no power supply and performs no measurements.



Figure 1. Noise source test system that includes the N2002A noise source test set, N8975A NFA and 11713A attenuator/switch unit

Configuring a noise source calibration system

Agilent can supply all the equipment necessary to configure a system that provides fast accurate noise figure calibration. For details on the required equipment and the recommended calibration process, see *Noise Source Calibration: Using the Agilent N8975A Noise Figure Analyzer and the N2002A Noise Source Test Set* (literature number 5988-7229EN).

The following Agilent equipment is required to configure a complete noise source calibration system¹:

- N8975A NFA (10 MHz to 26.6 GHz) with option 1D5 (high stability frequency reference)
- N2002A noise source test set with option 001²
- 11713A attenuator/switch unit
- Gold standard noise source (See *Ordering information* for further details.)

Demonstration software

Demonstration software is supplied with the N2002A noise source test set to automate the noise source calibration process. You can also use the software as a basis for developing your own automation process.

The demonstration software is supplied free of charge on the accompanying CD and is written in Agilent VEE Pro. Although the source code may be manipulated to meet your requirements it is neither a supported product or covered under warranty. To make changes to the source code a licensed copy of Agilent VEE Pro version 6.0 is required.

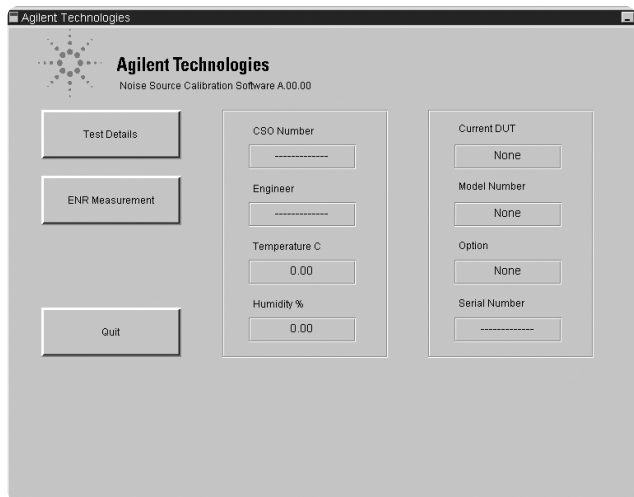


Figure 2. Demonstration software main window

2. Option N2002A-001 includes all the necessary cables and connectors to perform the standard calibration of noise sources with 3.5 mm and type-N connectors. See *Ordering information* for details.

Ordering Information

Noise source test set

N2002A	Noise source test set, 10 MHz to 26.5 GHz
N2002A-001	Accessory cable and adapters
	Cable (x1): 11500E
	3.5 mm female to female adapter (x3): 1250-1749
	3.5 mm female to type-N female adapter (x1): 1250-1745

Noise sources

N4000 SNS series noise source

N4000A	SNS noise source, nominal ENR 6 dB, 10 MHz to 18 GHz
N4001A	SNS noise source, nominal ENR 15 dB, 10 MHz to 18 GHz
N4002A	SNS noise source, nominal ENR 15 dB, 10 MHz to 26.5 GHz
N400xA-001 ³	Type-N (male) connector
N400xA-H10	Gold standards calibration

346 series noise source

346A	346 series noise source, nominal ENR 5 dB, 10 MHz to 18 GHz
346B	346 series noise source, nominal ENR 15 dB, 10 MHz to 18 GHz
346C	346 series noise source, nominal ENR 15 dB, 10 MHz to 26.5 GHz
346x-001	Type-N (male) connector
346x-002 ⁴	APC-7 connector
346x-004 ⁴	Type-N (female) connector
346x-H10	Gold standards calibration

Optional noise source calibration equipment⁵

11713A	Attenuator/switch unit
N8975A	Noise figure analyzer, 10 MHz to 26.5 GHz (option N8975A-1D5, high stability frequency reference)

Additional Literature

Noise Source Calibration: Using the Agilent N8975A Noise Figure Analyzer and the N2002A Noise Source Test Set, product note, literature number 5988-7229EN

NFA Series Noise Figure Analyzers, brochure, literature number 5980-0166E

SNS Series Noise Sources, product overview, literature number 5988-0081EN

Fundamentals of RF and Microwave Noise Figure Measurements, application note 57-1, literature number 5952-8255

Noise Figure Measurement Accuracy, application note 57-2, literature number 5952-3706

10 Hints for Making Successful Noise Figure Measurements, application note 57-3, literature number 5980-0288E

For more information on noise figure visit: www.agilent.com/find/nf

For more information on N2002A noise source test set visit:

www.agilent.com/find/nsts



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.

3. Options only available with the N4000A and the N4001A.

4. Options only available with the 346A and the 346B.

5. Full system is not supplied - all necessary equipment must be purchased separately.

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and onsite education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

Agilent T&M Software and Connectivity

Agilent's Test and Measurement software and connectivity products, solutions and developer network allows you to take time out of connecting your instruments to your computer with tools based on PC standards, so you can focus on your tasks, not on your connections. Visit www.agilent.com/find/connectivity for more information.

By internet, phone, or fax, get assistance with all your test & measurement needs

Phone or Fax

United States:
(tel) 800 452 4844

Canada:
(tel) 877 894 4414
(fax) 905 282 6495

China:
(tel) 800 810 0189
(fax) 800 820 2816

Europe:
(tel) (31 20) 547 2323
(fax) (31 20) 547 2390

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:

(tel) (82 2) 2004 5004
(fax) (82 2) 2004 5115

Latin America:

(tel) (305) 269 7500
(fax) (305) 269 7599

Taiwan:

(tel) 0800 047 866
(fax) 0800 286 331

Other Asia Pacific

Countries:
(tel) (65) 6375 8100
(fax) (65) 6836 0252

Email:
tm_asia@agilent.com

Online Assistance:

www.agilent.com/find/assist

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2002, 2003
Printed in USA, June 13, 2003
5988-7228EN



Agilent Technologies