


Agilent E1411B

5.5-Digit Multimeter, C-Size

Data Sheet

- 1-Slot, C-size, register based
- DCV, ACV, 2- & 4-wire Ω , temperature
- 5.5-digit low-noise integrating A/D
- 13 kHz high-speed sampling A/D
- Balanced differential isolated inputs
- Software calibration

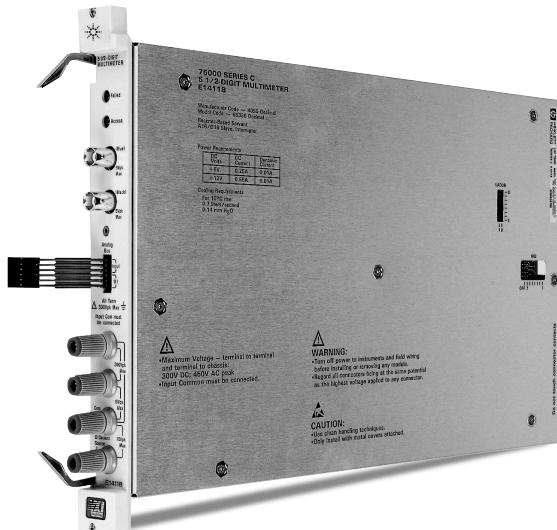

Agilent E1411B

Description

The Agilent Technologies E1411B 5.5-Digit Multimeter is a **C-size, 1-slot, register-based VXI module**. It is identical in electrical design to the E1326B, differing only in size. You can use the integrating A/D to make 5.5-digit, low-noise measurements, or switch to the sampling A/D to make 14-bit readings at rates up to 13 kHz.

When combined with any Agilent VXI relay or FET multiplexer, you can create a multichannel scanning multimeter. For example, by sending just one SCPI command to the E1406A, you can program the multimeter and the channels of your multiplexers all at one time. The E1411B provides flexible triggering with built-in timer pacer, also.

Product functions for this DMM include Vdc/ac, 2- and 4-wire Ω , offset-compensated Ω , thermocouples, thermistors, and RTDs. This autoranging DMM is especially well suited for data acquisition and computer-aided test applications.

Refer to the Agilent Technologies Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.



Agilent Technologies

Product Specifications

Reading Rate

Auto zero off, fixed range, default trigger delay, offset comp off, Sample Source "TIMER" for rates >15 readings/s.

Max. reading rate:

13 K

Resolution (bits/digits)

	Aperture						
	320 ms	267 ms	20 ms	16.7 ms	2.5 ms	100 µs	10 µs
Binary bits:	± 22	± 22	± 20	± 20	± 18	± 15	± 14
Decimal digits:	6.5	6.5	6	6	5.5	4.5	4

Typical Reading Rates (rdgs/s)

	Aperture					
	320 ms	267 ms	20 ms	16.7 ms	2.5 ms	100 µs
dc voltage:	3	3.5	49	59	365	3125
Four-wire resistance:	3	3.5	49	59	365	3125
ac voltage:	1.3	1.4	1.9	1.9	1.9	1.9

Noise Rejection (dB)

Noise Rejection Conditions: CMR measured with 1 kΩ in both HIGH and LOW leads with a 10% imbalance, LOW connected to COMMON at source, measured with respect to earth ground. NMR is for specified frequencies ± 0.1%.

dc Voltage & Resistance:

		320 ms	267 ms	20 ms	Aperture	16.7 ms	2.5 ms	100 µs	10 µs
dc:	Common mode rejection	150 dB	150 dB	150 dB	150 dB	150 dB	150 dB	150 dB	150 dB
50 Hz:	Power line cycles (NPLCs)	16	—	1	—	—	—	—	—
	Normal mode (50 Hz) rejection	84 dB	0 dB	60 dB	0 dB	0 dB	0 dB	0 dB	0 dB
60 Hz:	Power line cycles (NPLCs)	—	16	—	1	—	—	—	—
	Normal mode (60 Hz) rejection	0 dB	84 dB	0 dB	60 dB	0 dB	0 dB	0 dB	0 dB
400 Hz:	Power line cycles (NPLCs)	128	—	8	—	1	—	—	—
	Normal mode (400 Hz) rejection	84 dB	0 dB	84 dB	0 dB	60 dB	0 dB	0 dB	0 dB
ac Voltage:	Common mode rejection	110 dB	110 dB	110 dB	110 dB	110 dB	110 dB	110 dB	110 dB
dc to 400 Hz:	Common mode rejection	110 dB	110 dB	110 dB	110 dB	110 dB	110 dB	110 dB	110 dB

dc Voltage

Accuracy Conditions: Auto zero on, one hour warmup. Temperature within ±5° C of calibration temperature (module calibrated at 18-28° C).

Range	Input Resistance	Resolution vs Aperture (Volts)		90-Day Accuracy vs Aperture	
		20/16.7 ms	10 µs	20/16.7 ms	10 µs
125 mV	>100 MΩ	120 nV	7.6 µV	0.023% + 5 µV	0.115% + 60 µV
1 V	>100 MΩ	1.0 µV	61 µV	0.013% + 15 µV	0.1% + 200 µV
8 V	>100 MΩ	7.6 µV	488 µV	0.01% + 50 µV	0.1% + 1.5 mV
64 V	10 MΩ ± 5%	61 µV	3.9 mV	0.015% + 1 mV	0.1% + 20 mV
300 V	10 MΩ ± 5%	488 µV	31 mV	0.015% + 5 mV	0.1% + 80 mV
dc voltage:		300 V			
Voltage accuracy (dc):		0.0145%			

Four-Wire Resistance

Accuracy Conditions: Auto zero on, one hour warmup. Temperature within $\pm 5^\circ \text{C}$ of calibration temperature (module calibrated at $18\text{--}28^\circ \text{C}$).

Range	Source Current	Maximum Open Circuit Voltage	Resolution vs Aperture (Ω)		90-Day Accuracy vs Aperture $\pm (\% \text{ of Reading} + \Omega)$	
			20/16.7 ms	10 μs	20/16.7 ms	10 μs
256 Ω	488 μA	11.5 V	250 $\mu\Omega$	15 $\text{m}\Omega$	0.035% + 10 $\text{m}\Omega$	0.12% + 50 $\text{m}\Omega$
2 k Ω	488 μA	11.5 V	2 m Ω	125 m Ω	0.028% + 20 m Ω	0.1% + 200 m Ω
16 k Ω	61 μA	11.5 V	15 m Ω	1 Ω	0.025% + 200 m Ω	0.1% + 2 Ω
131 k Ω	61 μA	11.5 V	125 m Ω	8 Ω	0.028% + 1 Ω	0.1% + 16 Ω
1 M Ω	7.6 μA	11.5 V	1 Ω	64 Ω	0.015% + 10 Ω	0.1% + 120 Ω

Note: With offset compensation on, accuracy is the same as for the voltmeter alone.

2/4-wire Ω : 1 M Ω

True RMS ac Voltage (ac coupled)

Crest Factor: 7 at 10% full scale; 1.5 at full scale. Accuracy Conditions: Sine wave inputs >10% of full scale. dc component <10% of ac component. Auto-zero on, 1 hour warmup. Temperature within $\pm 5^\circ \text{C}$ of calibration temperature (module calibrated at $18\text{--}28^\circ \text{C}$).

Range (RMS)	Input Impedance	Frequency	Resolution vs Aperture (Volts)		90-Day Accuracy vs Aperture $\pm (\% \text{ of Reading} + \text{Volts})$	
			320/267 ms	10 μs	320/267 ms	All other apertures
87.5 mV	>100 M Ω , <100 pF	20-50 Hz	30 nV	7.6 μV	2.175% + 200 μV	2.175% + 1 mV
		50 Hz-1 kHz			0.675% + 200 μV	0.675% + 200 μV
		1-5 kHz			0.675% + 200 μV	0.675% + 200 μV
		5-10 kHz			3.175% + 200 μV	3.175% + 200 μV
700 mV	>100 M Ω , <100 pF	20-50 Hz	0.24 μV	61 μV	2.125% + 1.5 mV	2.125% + 8 mV
		50 Hz-1 kHz			0.625% + 1.5 mV	0.625% + 1.5 mV
		1-5 kHz			0.625% + 1.5 mV	0.625% + 1.5 mV
		5-10 kHz			3.125% + 1.5 mV	3.125% + 1.5 mV
5.6 V	>100 M Ω , <100 pF	20-50 Hz	2.0 μV	488 μV	2.125% + 15 mV	2.125% + 80 mV
		50 Hz-1 kHz			0.625% + 15 mV	0.625% + 15 mV
		1-5 kHz			1.125% + 15 mV	1.125% + 15 mV
		5-10 kHz			10.125% + 15 mV	10.125% + 15 mV
44.8 V	10 M Ω \pm 5%, <100 pF	20-50 Hz	15 μV	3.9 mV	2.125% + 100 mV	2.125% + 500 mV
		50 Hz-1 kHz			0.625% + 100 mV	0.625% + 100 mV
		1-5 kHz			1.125% + 100 mV	1.125% + 100 mV
		5-10 kHz			10.125% + 100 mV	10.125% + 100 mV
300 V	10 M Ω \pm 5%, <100 pF	20-50 Hz	122 μV	31 mV	2.125% + 500 mV	2.125% + 2.5 V
		50 Hz-1 kHz			0.625% + 500 mV	0.625% + 500 mV
		1-5 kHz			1.125% + 500 mV	1.125% + 500 mV
		5-10 kHz			10.125% + 500 mV	10.125% + 500 mV

ac voltage: 300 V
Voltage accuracy (ac): 0.84%

Timing/Synchronization

Timer/pacer:

Timer range: 76 μs to 65.5 ms
Resolution: 2 μs

Programmable delay:

Delay range: 40 μs to 16 s
Resolution: 2 μs

External trigger:

Minimum pulse width: 100 ns
Maximum trigger rate: 5 kHz (Trigger Condition, negative edge; Fixed range, 10 μs aperture)

Isolation

450 Vpk between any terminal and chassis.

dc Voltage Accuracy with Relay Multiplexers

Range	20/16.7 ms	10 μs	20/16.7 ms	10 μs
125 mV	0.023% + 9 μV	0.115% + 64 μV	0.023% + 55 μV	0.115% + 110 μV
1 V	0.013% + 19 μV	0.1% + 204 μV	0.013% + 65 μV	0.1% + 250 μV
8 V	0.01% + 54 μV	0.1% + 1.5 mV	0.01% + 100 μV	0.1% + 1.55 mV
64 V	0.015% + 1 mV	0.1% + 20 mV	0.015% + 1.05 mV	0.1% + 20 mV
300 V	0.015% + 5 mV	0.1% + 80 mV	0.015% + 5.05 mV	0.1% + 80 mV

Accuracy Conditions: Auto zero on, one hour warmup. Temperature within $\pm 5^\circ \text{C}$ of calibration temperature (module calibrated at $18\text{--}28^\circ \text{C}$).

True RMS ac Voltage (ac coupled) with Relay Multiplexers

1-5 kHz and 5-10 kHz frequencies (all apertures) when using Relay Multiplexers (E1343A, E1345A, E1346A, or E1347A). Add 0.2% to the ac Voltage specifications.

Strain Measurements with Strain Relay Multiplexers

All measurements are made using the MEAS command.

Note: The Agilent E1406A command module and embedded controllers provide units conversion; if the E1411B is register programmed, your program must make the units conversion.

V_s = 5 V Power Supply / Gage Factor = 2

		18-20° C		Temp. Coefficient	
		μe	%e	μe	%e
Relays	Quarter	20.8	.023	1.96	0.006
	Half	2.92	.023	0.23	0.006
	Full	0.834	.023	0.053	0.006
FETs	Quarter	26.3	.023	3.98	0.006
	Half	5.63	.023	1.24	0.006
	Full	2.19	.023	0.557	0.006

V_s = 1 V Power Supply / Gage Factor = 2

		18-20° C		Temp. Coefficient	
		μe	%e	μe	%e
Relays	Quarter	25.8	0.023	1.96	0.006
	Half	5.39	0.023	0.23	0.006
	Full	2.07	0.023	0.053	0.006
FETs	Quarter	52.9	0.023	12.0	0.006
	Half	18.9	0.023	5.27	0.006
	Full	8.85	0.023	2.57	0.006

V_s = 0.1 V Power Supply / Gage Factor = 2

		18-20° C		Temp. Coeffiecient	
		μe	%e	μe	%e
Relays	Quarter	81.3	0.023	1.96	0.006
	Half	33.2	0.023	0.23	0.006
	Full	16	0.023	0.053	0.006
FETs	Quarter	353	0.023	103	0.006
	Half	169	0.023	50.7	0.006
	Full	83.8	0.023	25.3	0.006

Four-Wire Resistance with Relay Multiplexers

Accuracy Conditions: Auto zero on, one hour warmup, temperature within $\pm 5^\circ \text{C}$ of calibration temperature (module calibrated at $18\text{-}28^\circ \text{C}$).

Note: With offset compensation on, accuracy is the same as for the voltmeter alone.

90-Day Accuracy vs Aperture ± (% of reading + Ω)		
Range	E1326B & E1345A/47A 20/16.7 ms	10 μs
256 Ω	0.035% + 18.2 mΩ	0.12% + 58.2 mΩ
2 kΩ	0.025% + 28.2 mΩ	0.1% + 208 mΩ
16 kΩ	0.025% + 266 mΩ	0.1% + 2.1 Ω
131 kΩ	0.025% + 1.1 Ω	0.1% + 16.1 Ω
1 MΩ	0.025% + 10.5 Ω	0.1% + 121 Ω

Note: Accuracy data includes all errors contributed by the multimeter, analog bus ribbon cables, multiplexer, and transducer linearization (if applicable). The accuracies do not include transducer accuracy errors.

Temperature

The temperature accuracy graphs (below) include instrument and firmware linearization errors. The linearization algorithm used is based on the ITS-90 standard transducer curves. Add your transducer accuracy to determine total measurement error.


Note: The E1406A command modules and Agilent embedded VXI controllers provide units conversion; if the E1411B is register-programmed, your program must make the necessary units conversion.

Thermocouple (E1411B Multimeters and E1347A/E1476A

TC MUX:

16 ms aperture (1 PLC):

100 μ s aperture:

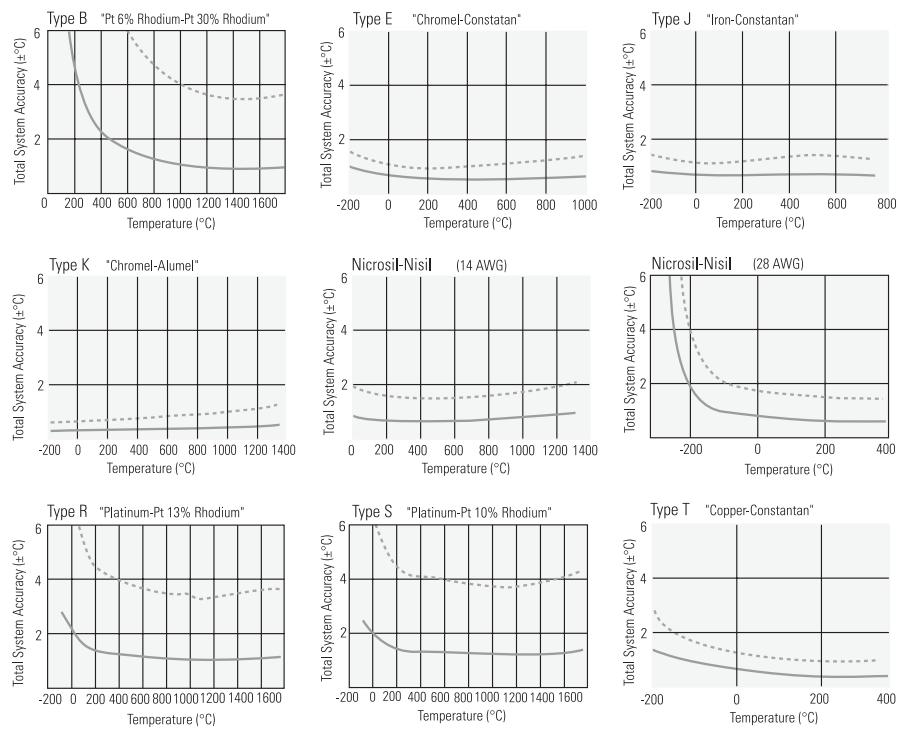


Thermistors (E1411B Multimeters and E1345A/E1347A/E1476A

MUXs)

4-wire Ω :

16 ms aperture (1 PLC):

100 μ s aperture:


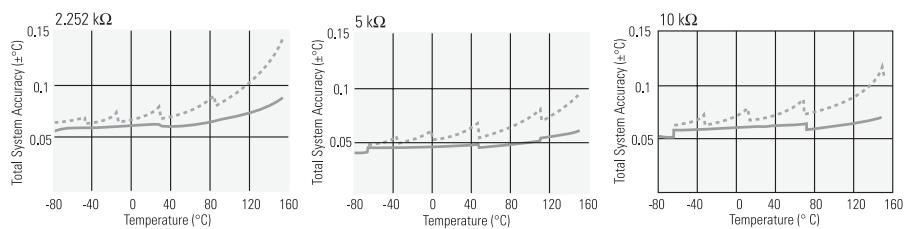


RTDs (E1411B Multimeters and E1345A/E1476A
MUXs)

4-wire Ω :

16 ms aperture (1 PLC):

100 μ s aperture:

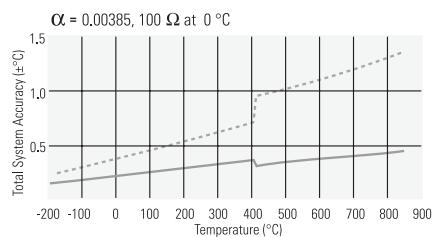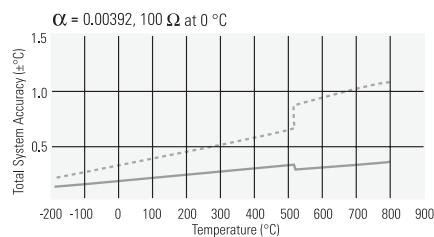

Functions

Idc:	—
Iac:	—
Frequency:	—
Period:	—
Temp.:	Tm Tc RTD

General Specifications

VXI Characteristics

VXI device type:	Register based
Data transfer bus:	Not specified
Size:	C
Slots:	1
Connectors:	P1/2
Shared memory:	Yes, shared memory available with E1406A SCPI driver
VXI buses:	TTL Trigger Bus

Instrument Drivers - See the Agilent Technologies Website (http://www.agilent.com/find/inst_drivers) for driver availability and download.

Command module firmware:	Downloadable
Command module firmware rev:	A.02
I-SCPI Win 3.1:	Yes
I-SCPI Series 700:	Yes
C-SCPI LynxOS:	Yes
C-SCPI Series 700:	Yes
Panel Drivers:	Yes
VXIplug&play Win Framework:	Yes
VXIplug&play Win 95/NT Framework:	Yes
VXIplug&play HP-UX Framework:	No

Module Current

	I_{PM}	I_{DM}
+5 V:	0.2	0.01
+12 V:	0.55	0.01
-12 V:	0	0
+24 V:	0	0
-24 V:	0	0
-5.2 V	0	0
-2 V:	0	0

Cooling/Slot

Watts/slot:	8.50
ΔP mm H₂O:	0.14
Air Flow liter/s:	0.71

Ordering Information

Description	Product No.
5.5-Digit Multimeter, High-Accuracy, C-Size	E1411B
Service Manual	E1411B 0B3
Japan - Japanese Localization	E1411B ABJ
ANSI Z540 Compliant Calibration	E1411B A6J
3 yr. Retrn. to Agilent to 1 yr. OnSite Warr.	E1411B W01

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

By internet, phone, or fax, get assistance with all your test & measurement needs.

Online assistance:
www.agilent.com/find/assist

Phone or Fax

United States:
(tel) 1 800 452 4844

Canada:
(tel) 1 877 894 4414
(fax) (905) 282 6495

China:
(tel) 800 810 0189
(fax) 1 0800 650 0121

Europe:
(tel) (31 20) 547 2323
(fax) (31 20) 547 2390

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:
(tel) (82 2) 2004 5004
(fax) (82 2) 2004 5115

Latin America:
(tel) (305) 269 7500
(fax) (305) 269 7599

Taiwan:
(tel) 080 004 7866
(fax) (886 2) 2545 6723

Other Asia Pacific Countries:
(tel) (65) 375 8100
(fax) (65) 836 0252
Email: tm_asia@agilent.com

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2001
Printed in USA September 1, 2001
5965-5562E