

JRC SAW FILTER

NSVS1061

Application

174MHz GPS

Electrical Specification: (Table 1)

The device characteristics are measured in the circuit shown in Fig.1.

Table 1. Electrical Specifications

Parameter		Spec.	Typ.
Input and Output Impedance		-	50Ω
Nominal Center Frequency (f0)		-	174 MHz
3dB Bandwidth		-	22 MHz
Insertion Loss	163.0~185.0MHz	12.0 dB	10.0 dB
Response Variation	163.0~185.0MHz	1.5 dB	1.0 dB
Group Delay Variation	163.0~185.0MHz	150 ns	100 ns
Out of Band Rejection	149~157MHz	30 dB	40 dB
	191~199MHz	30 dB	30 dB

(Operating Temperature Range: -20~+70°C)

Maximum Rating: (Table 2)

Table2. Maximum Ratings

Item	Rating
Maximum Input Power	+10dBm
Maximum DC Voltage	7.5V
Operating Temperature Range	-20~+70°C
Storage Temperature	-30~+80°C

Mechanical Specifications:

Package is designed as small as 9.1x4.8x1.3[mm³] for SMD (Surface Mount Device) type.

Notice:

This part is electrostatic discharge sensitive and may be damaged by improper handling.

Communications Equipment Division
Communications Equipment Marketing Department

Japan Radio Co., Ltd.

10-1, Nishi-Shinjuku 6-chome Shinjuku-ku,

Tokyo. 160-8328 Japan

Tel. +81 3-3348-3845

Fax. +81 3-3348-3935

<http://www.jrc.co.jp/jp/product/device/saw/index.html> (Japanese)

<http://www.jrc.co.jp/eng/product/saw/index.html> (English)

Technical drawing of a rectangular metal plate. The main view shows a plate with overall dimensions of 9.10 ± 0.15 (width) and 4.8 ± 0.15 (height). The plate features a central rectangular area with a dashed line indicating a fold or cut. The central area contains the text "J 4 5 1" and "1 0 6 1". The plate has rounded corners with a radius of $R0.15$ and a thickness of (1.15) . The plate is marked with a "J" and the numbers "4 5 1" and "1 0 6 1". The plate is marked with a "J" and the numbers "4 5 1" and "1 0 6 1". The plate is marked with a "J" and the numbers "4 5 1" and "1 0 6 1".

Technical drawing of a 3D printed part. The drawing shows a side view of a rectangular block with three vertical slots. The dimensions are as follows:

- Overall height: 1.3 max.
- Overall width: (0.65)
- Distance between the centers of the first and second slots: (2.54)
- Distance between the centers of the second and third slots: (2.54)

[illegible]

No.	Connection
1	GND(PKG)
2	GND(PKG)
3	GND(PKG)
4	OUT/IN
5	GND(signal)
6	GND(PKG)
7	GND(PKG)
8	GND(PKG)
9	IN/OUT
10	GND(signal)

Japan Radio Co., Ltd.



Notice

1. Use this component within operating temperature range. It might not be satisfied with electrical specification without operating temperature range. When it is used less than -20°C or more than +70°C, it might be a cause of degradation or destruction of the component. Even if it endures during a short time, it causes degradation of qualification.
2. When soldering iron is used, solder with the temperature at the tip of soldering iron: 350°C max., the time of soldering: 10 seconds max., the power of soldering iron: 30W max..
3. Notice that the allowed time of soldering with soldering iron is accumulated time, when soldering is repeated.
4. As rapid temperature change for cleaning after reflow soldering might be a cause of destruction clean this component after confirming that temperature of this component goes down to room temperature.
5. Confirm that there are not any influence for qualification to this component in mounting on PCB when this component is cleaned.
6. As it might be a cause of degradation or destruction to apply static electricity to this component, do not apply static electricity or excessive voltage while assembling and measuring. And do not transport this component with bare hand.
7. As it might be a cause of degradation or destruction to apply D.C. voltage between each terminal, apply D.C. voltage 7.5V max. in actual circuit.


Note

1. This specification specifies the quality of this component as a single unit. Make sure that this component is evaluated and confirmed against this specification when it is mounted to your products.
2. The information contained herein may be changed without prior notice. It is therefore advisable to contact Japan Radio Company before proceeding with the design of equipment incorporating this product.
3. The products are designed to be used with ordinary electronic equipment (data and communications equipment, office equipment, audio-video equipment, measuring instruments, etc). Japan Radio Company does not assume any liability for the case using the products with the application required high reliability or safety extremely (such as space equipment, sea-bottom equipment, medical equipment etc). When intending to use any our product please contact our sales representatives in advance.

FREQUENCY CHARACTERISTICS

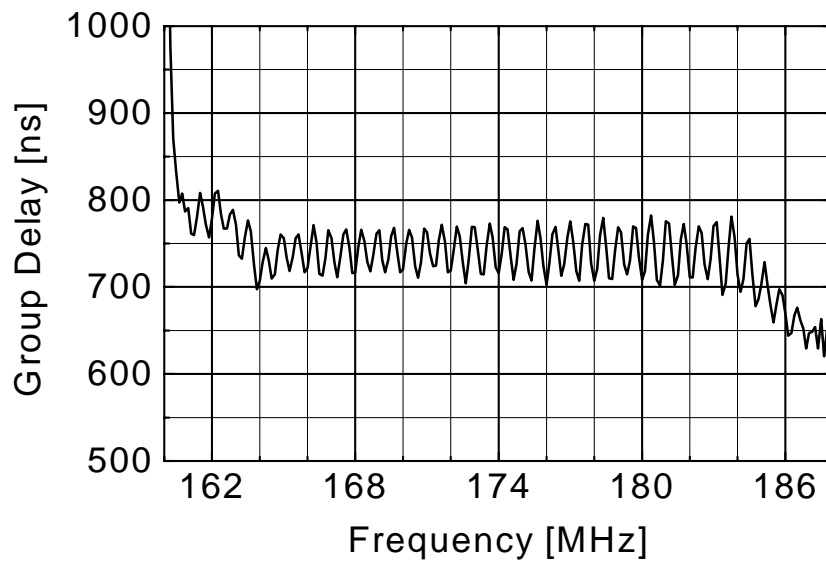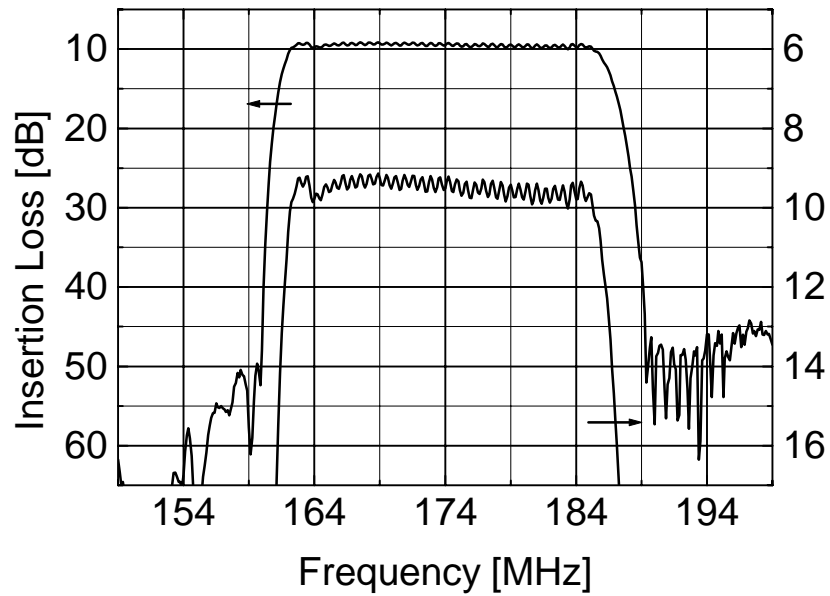

S11



S22

