



This manual is for reference and historical purposes, all rights reserved.

This page is copyright© by M. Butkus, NJ.

This page may not be sold or distributed without the expressed permission of the producer

I have no connection with any camera company

On-line camera manual library

This is the full text and images from the manual. This may take 3 full minutes for the PDF file to download.

If you find this manual useful, how about a donation of \$3 to: M. Butkus, 29 Lake Ave., High Bridge, NJ 08829-1701 and send your e-mail address so I can thank you. Most other places would charge you \$7.50 for a electronic copy or \$18.00 for a hard to read Xerox copy.

This will allow me to continue to buy new manuals and pay their shipping costs.

It'll make you feel better, won't it?

**If you use Pay Pal or wish to use your credit card,
click on the secure site on my main page.**

PayPal Name Lynn@butkus.org

234 7780

Nikon

N

AF

INSTRUCTION MANUAL

CONTENTS

FOREWORD	3
NOMENCLATURE	4-7
BASIC OPERATION	8
MOUNTING THE LENS	8
INSTALLING BATTERIES	9
CHECKING BATTERY POWER	10-11
LOADING FILM	12-13
BASIC SHOOTING	14-18
REWINDING FILM	19
CONTROLS IN DETAIL	20-42
FILM SPEED SETTING	20-21
Using DX-Coded Film	20-21
Manual Film Speed Setting	21
FILM ADVANCE MODE	22
Mode Selection	22
FOCUS	23-31
AUTOFOCUS	23-26
Continuous Servo Autofocus Mode	23
Taking Pictures with an Off-Center Main Subject	24-25
Autofocusing with Optional Autofocus Speedlights	26
MANUAL FOCUS WITH	
ELECTRONIC RANGE FINDER	27-28
Freeze Focus	29
MANUAL FOCUS USING CLEAR MATTE FIELD	30
SPECIAL FOCUSING SITUATIONS	31
EXPOSURE	32-42
Exposure Mode Setting	32
PROGRAMMED AUTO EXPOSURE MODES	32
Flexible Program	33
SHUTTER-PRIORITY AUTO EXPOSURE MODE	34-36

APERTURE-PRIORITY AUTO EXPOSURE MODE	37-39
MANUAL EXPOSURE MODE	40-42
Bulb Setting	42
PHOTOGRAPHIC TECHNIQUES	43-59
EXPOSURE METERING SYSTEMS	43-47
Matrix Metering and 75/25 Center-Weighted Metering	43
Metering System Selection	43
When to Use Matrix or Center-Weighted Metering	44-47
EXPOSURE COMPENSATION	48-54
In Automatic Exposure Modes	48
AE (Auto Exposure) Lock Lever	48-49
Exposure Compensation Button	50-51
In Manual Exposure Mode	52-53
Auto Exposure Bracketing	54
DEPTH-OF-FIELD PREVIEW BUTTON	55
Stop-Down Exposure Metering	55
SELF-TIMER	56-57
Two-Shot Self-Timer	57
MULTIPLE EXPOSURE PHOTOGRAPHY	58-59
FLASH PHOTOGRAPHY	60-68
Matrix Balanced Fill-Flash	62
Matrix TTL Flash	63
Center-Weighted Fill-Flash	63
Center-Weighted TTL Flash	63
Shutter Speed/Aperture and Flash Mode	
Combinations for Each Exposure Mode	64-65
Matrix Balanced Fill-Flash Operation	66-67
Rear-curtain Sync Flash Photography	68
Ready-Light Warnings	69
VIEWFINDER INFORMATION	69

LCD INFORMATION	70–71
LENSES	72–73
Lens Compatibility Chart	72–73
ACCESSORY COMPATIBILITY	73
INTERCHANGEABLE FOCUSING SCREENS	74–75
CAMERA CARE TIPS	76–77
NOTES ON BATTERIES	78
SPECIFICATIONS	79–82

FOREWORD

Thank you for purchasing the Nikon N8008. We're sure it will make photography a much more exciting part of your life.


With the N8008, Nikon has taken the limits of SLR technology to new heights. Ultra-fast auto-focusing, versatile Matrix Metering, Matrix Balanced Fill-Flash and an unprecedented fast metal shutter with 1/8000 second top speed are just the beginning of what you'll discover in this sleek, ergonomically designed camera.

The other side of this success story is that while offering these breakthroughs, Nikon has maintained the integrity of its lens mount, giving long-time Nikon users an opportunity to upgrade to the most advanced photographic technology available, while providing new users with the largest selection of fine-quality lenses on the planet.

Get to know your N8008, but before using it, be sure to read this manual thoroughly.

NOMENCLATURE

Lens (AF Zoom-Nikkor 35-70mm f/3.3-4.5)

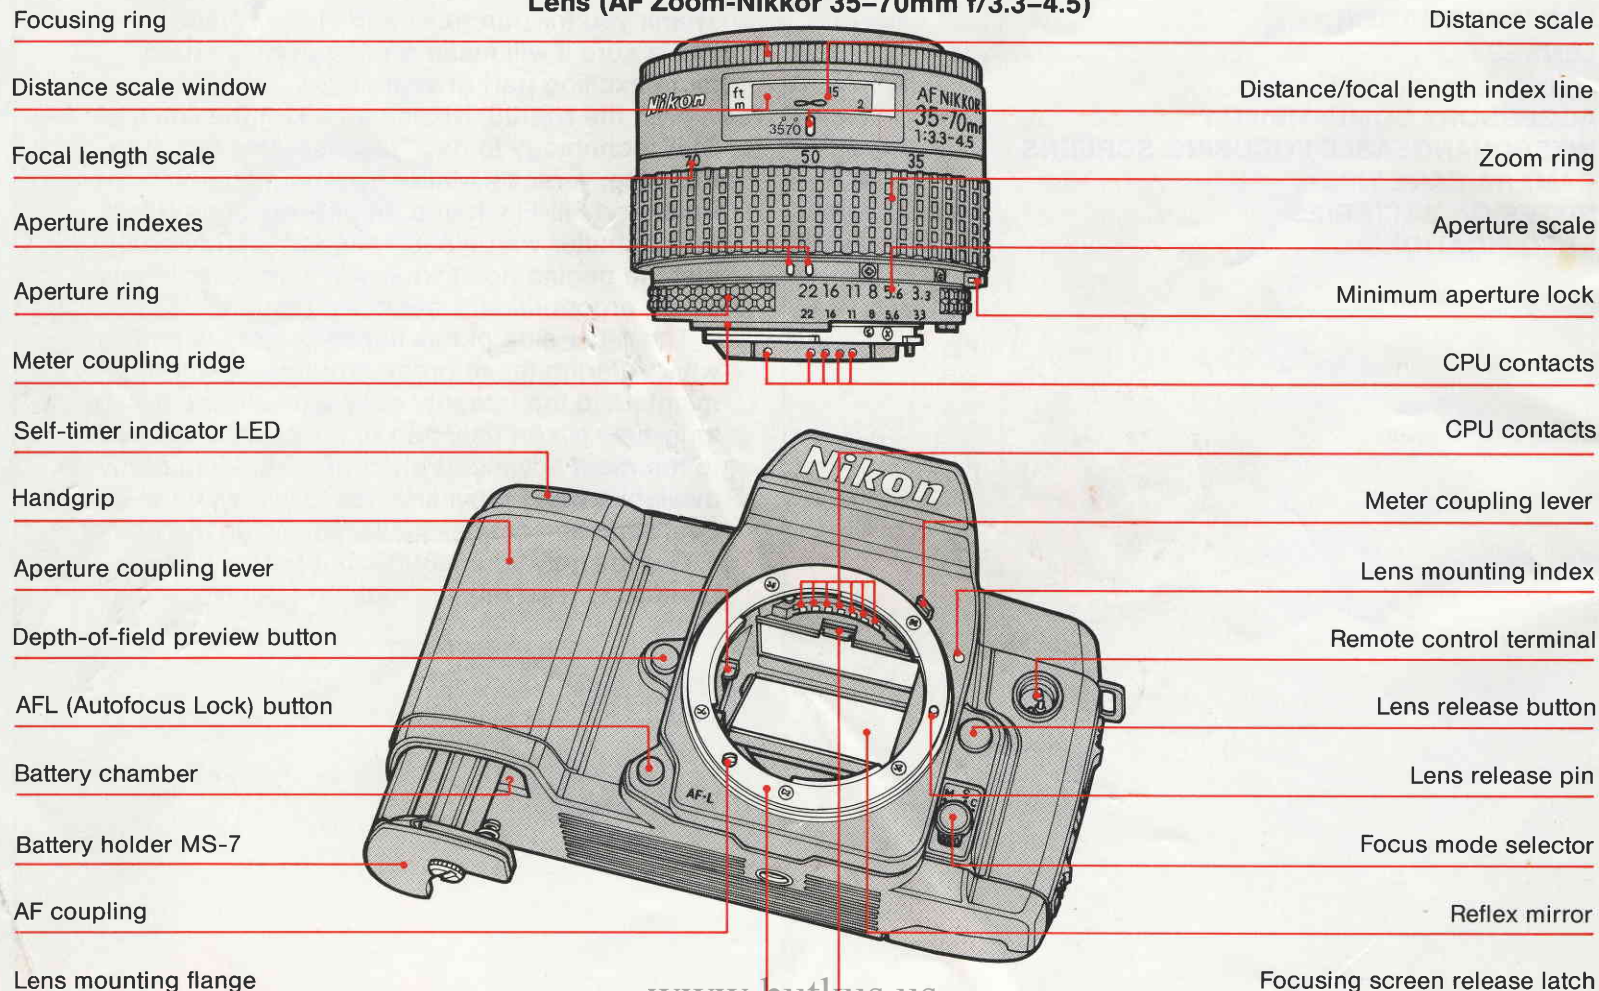

www.butkus.us

LCD illumination window

Accessory shoe

Metering system selection button

Exposure mode button

Film speed button

Camera strap eyelet

Film advance mode button

Multiple exposure/
film rewind button

Film cartridge confirmation window

Self-timer button

Film rewind button

Exposure compensation button

Shutter release button

Power switch

Camera strap eyelet


Command input control dial

LCD panel


AE (Auto Exposure) Lock lever

Viewfinder illumination button

Camera back

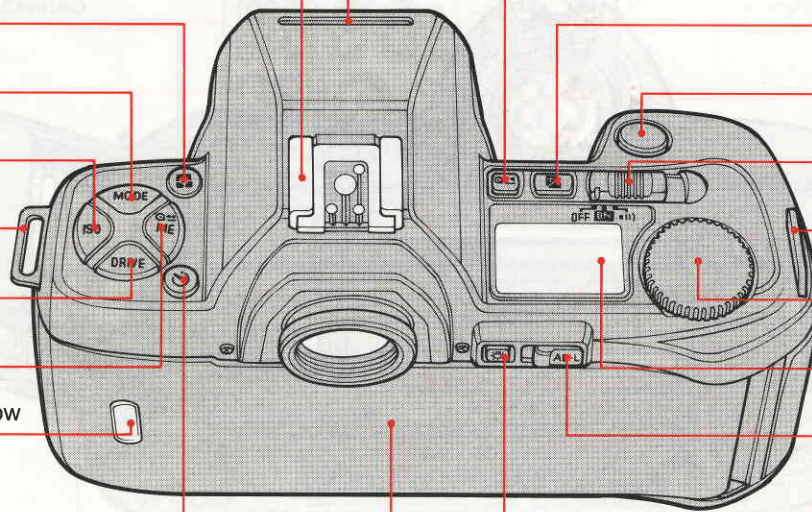

Eyeiece cover DK-8



Viewfinder eyepiece

Shutter curtains

Film rewind fork

Camera back lock releases

Film cartridge chamber

DX contacts

Data back contacts

Tripod socket

Film guide rails

Film take-up spool


Camera back hinge release

Film pressure plate

Film pressure roller

Film leader index

Film sprocket

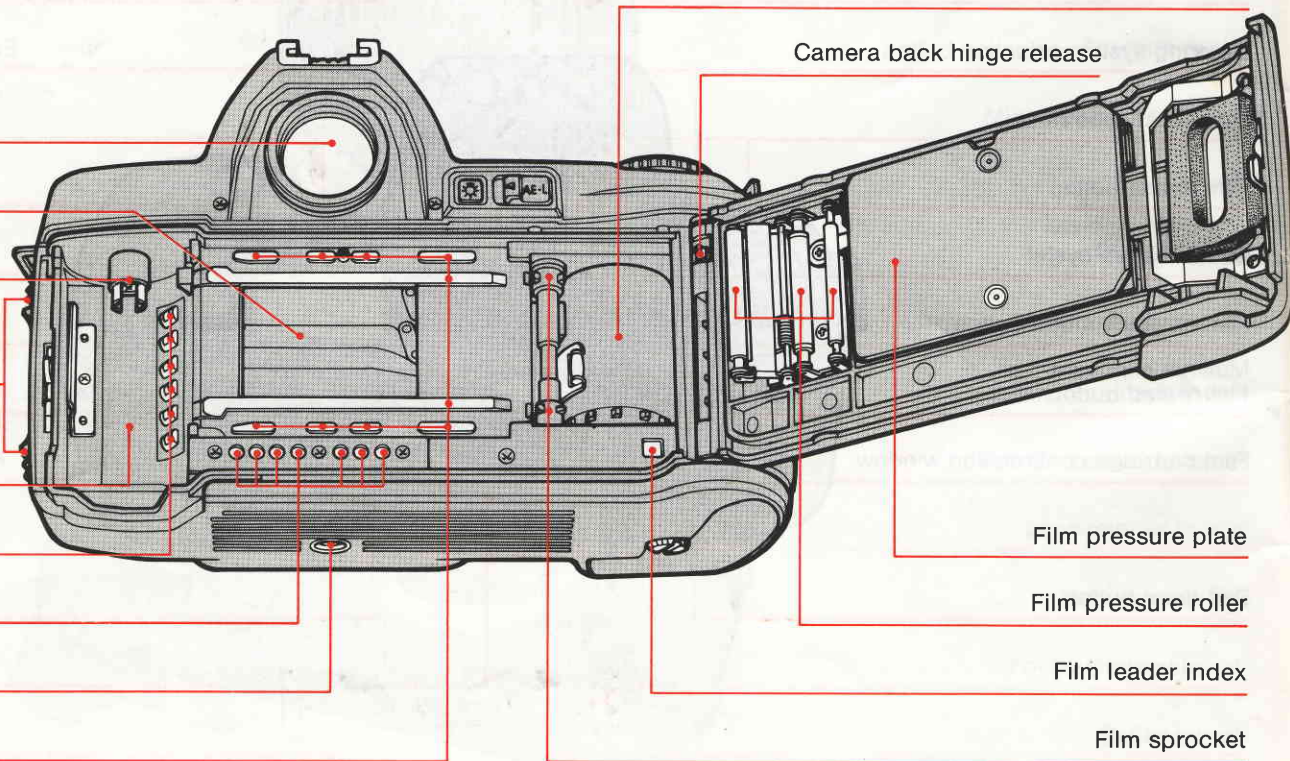

Metering system

LCD Panel

Exposure compensation

Exposure mode

Shutter speeds/film speeds

Film speed setting

Electronic analog display

DX-coded film speed setting

Aperture/exposure compensation value

Film advance mode


Frame counter/self-timer duration/
number of multiple exposure

Film installation

Multiple exposure

Self-timer

Film advance and rewind

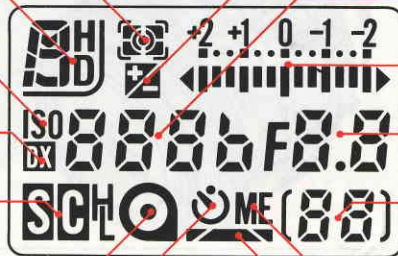

Inside Viewfinder

12mm-dia. central area

Clear matte field

Focus brackets

Exposure mode

Electronic analog display


Focus indicators

Exposure compensation mark

Shutter speeds/film speeds




Ready-light LED

Aperture/exposure compensation value

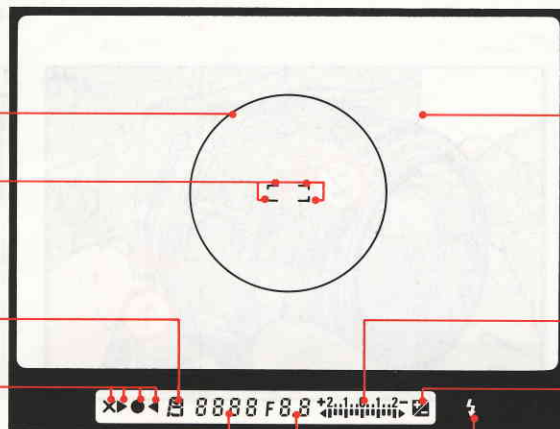


BASIC OPERATION


MOUNTING THE LENS

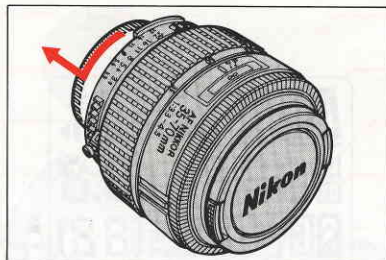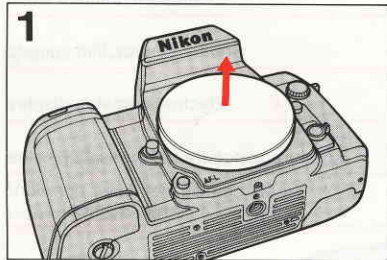

Remove body cap and front and rear lens caps.

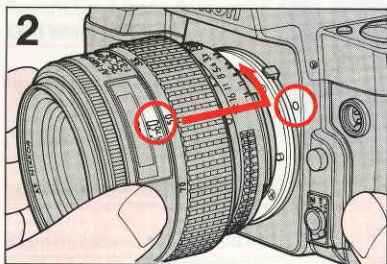

Twist lens counterclockwise until it securely locks into place.

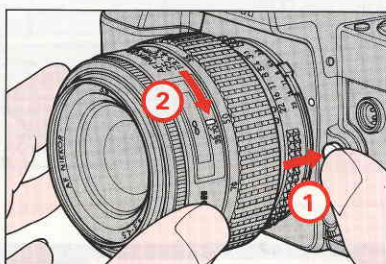


To remove


To remove lens, push lens release button and turn lens clockwise.

See page 72 for Nikon lens compatibility chart.


INSTALLING BATTERIES

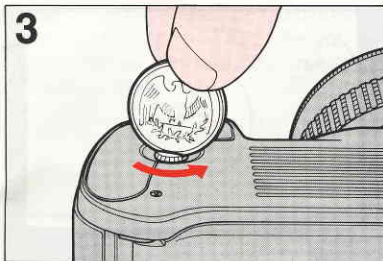


Using a coin, loosen battery holder lock screw.

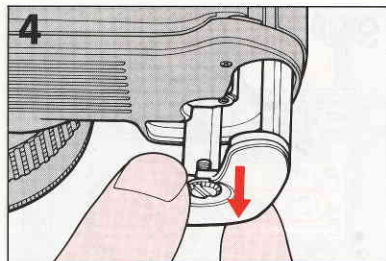


Remove battery holder.

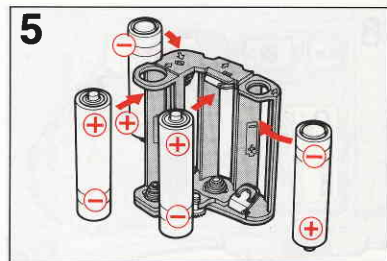

Install four AA-type batteries with "+" and "-" ends positioned as shown inside the holder.

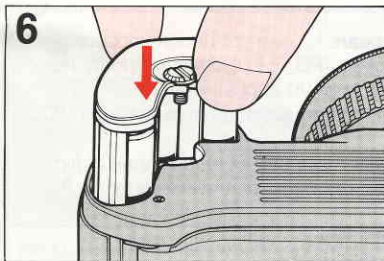



Return battery holder to battery chamber.

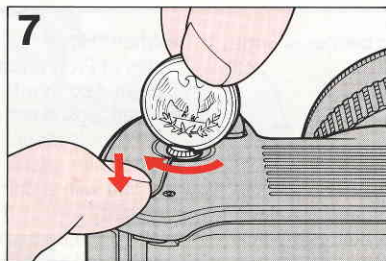


While pressing the holder into place, tighten lock screw.


CHECKING BATTERY POWER

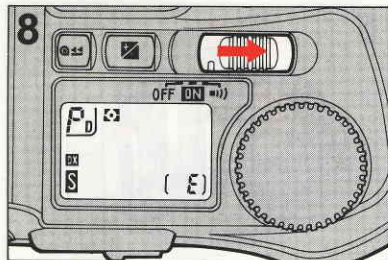


Slide the power switch to ON or  position so LCD panel and viewfinder LCDs appear as shown.

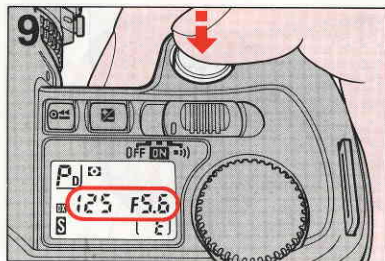

Next, lightly press the shutter release button and confirm shutter speed and aperture appear in the LCD panel and viewfinder. This indicates sufficient battery power.

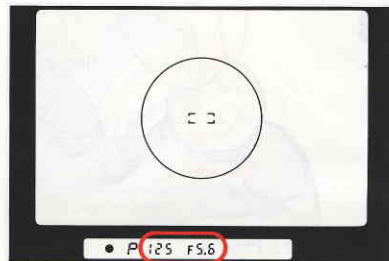

With the power switch at , the electronic beeper sounds in the following situations:

Operation signals:

- When you reach the end of the film roll.
- When film rewinding is complete.
- During self-timer operation.

Alert signals:

- When the automatically selected shutter speed is slower than 1/30 second and the shutter release button is lightly pressed. (Except when using Auto Exposure Lock or a Nikon speedlight*.)



* Beeper sounds when SB-24 is used in rear-curtain sync.

- When "HI" or "Lo" appears for over- or underexposure alert in Programmed Auto (PD, P, PH), Shutter-Priority Auto (S) or Aperture-Priority Auto (A) exposure mode.
- When lens is not set to the smallest aperture setting in PD, P, PH or S mode.
- When film speed selector is set at DX, and a non-DX film or film with a damaged or unacceptable DX code is loaded.
- When the camera detects abnormality such as torn or damaged film during film advance.


www.butkus.us

Shutter speed and aperture indicators remain on for approx. 8 sec. after you take your finger off the button, unless you release the shutter.


When not using the camera, to conserve battery power, be sure to turn the power switch off.



If it turns off immediately after you remove your finger from the button, replace batteries. (Even with sufficient battery power, the shutter speed and aperture indicators go off approx. 2 sec. after you remove your finger from button following shutter release.)





If the LCD panel blinks when you lightly press the shutter release button, battery power is not sufficient.



If the shutter does not operate and data does not appear in the LCD panel or viewfinder, batteries are exhausted or improperly loaded.


The batteries operate both auto-focus function and camera motor; when operation becomes noticeably slower, change batteries.

LOADING FILM

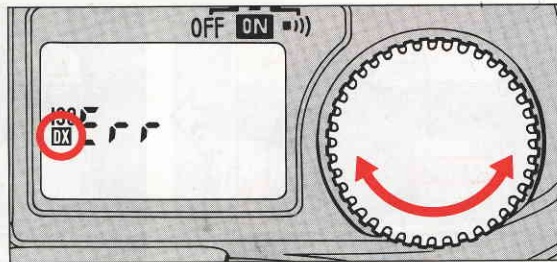


To select DX position for DX-coded film, rotate command dial while pressing film speed (ISO) button. DX position is located between **6** and **6400**.

"DX" will appear in the LCD panel.

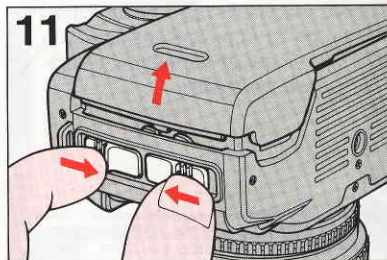


Slide camera back lock releases to open camera back.


- Usable film speed range for DX-coded film is ISO 25 to 5000.
- To avoid spoiling film (especially high-ISO film), do not load/unload film in direct sunlight.
- For details on manual film speed setting, see page 21.

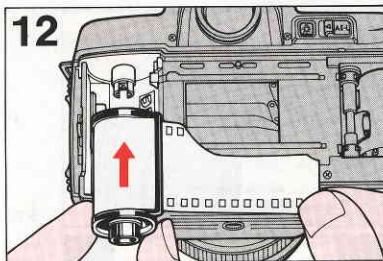


Insert film cartridge.

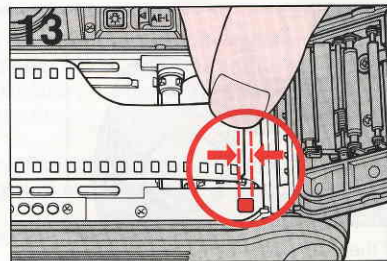


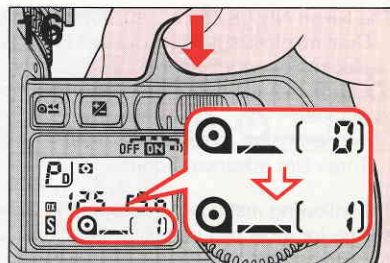
Pull film leader over to red index mark.

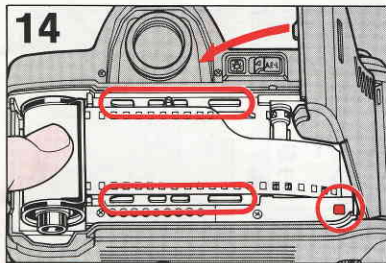


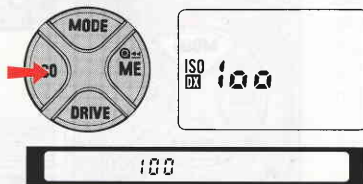

Check to ensure film is properly positioned with no slack.
Close camera back and confirm lock releases snap closed.

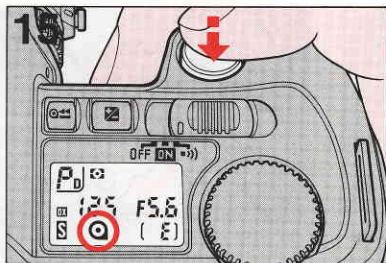


Lightly press shutter release button; film installation mark  will appear in the LCD panel.



Fully depress shutter release button to automatically advance film to frame 1. Confirm frame "1" appears in the LCD panel. When film is correctly loaded,  mark appears.



To confirm the ISO number of DX-coded film, press film speed button.

If film is not correctly positioned,  mark blinks, beeper sounds (if set), and shutter locks. Open camera back and reload film.


BASIC SHOOTING

The Nikon N8008 offers the following features:

- Dual autofocus modes, manual focus with electronic range finder
- Five automatic exposure control modes plus manual
- Two exposure metering systems
- Three film advance modes.

The following instructions provide the easiest setting for most picture-taking situations, using an AF Nikkor lens:

- Single Servo Autofocus Mode
- Dual Program Auto Exposure Control
- Matrix Metering System
- Single Frame Film Advance Mode


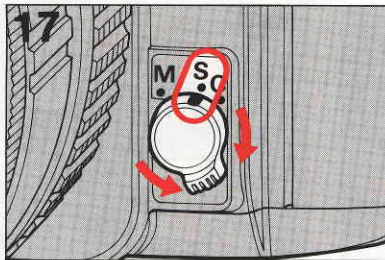


For Single Servo Autofocus:

Set focus mode selector to S.

If lens in use has an A-M switch, set the switch to A.



- For details on focus mode, see page 23.

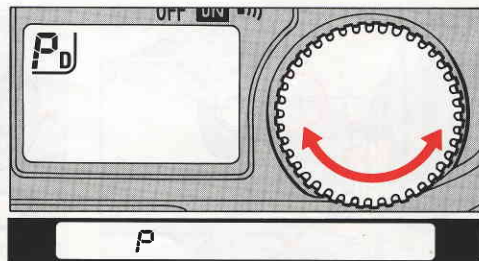

For Dual Program Auto exposure:

While pressing the exposure mode button (MODE), rotate command dial until **P_D** mark appears in the LCD panel.



- For details on exposure mode, see page 32.

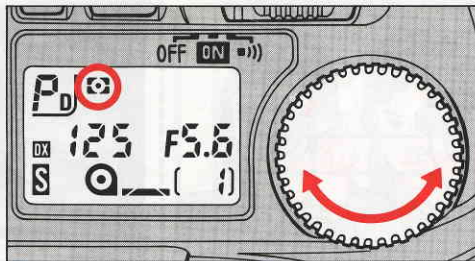

For Matrix Metering:

While pressing the exposure metering mode button, rotate command dial until the Matrix Metering mark appears.



- For details on metering systems, see page 43.

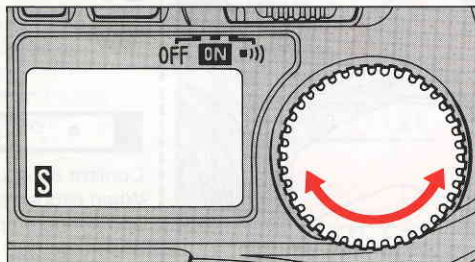

For Single Frame film advance:


While pressing the film advance mode button (DRIVE), rotate command dial until the mark appears.

- For details on film advance mode, see page 22.



Instant Auto Mode

By pressing exposure mode (MODE) and film advance mode (DRIVE) buttons **simultaneously** for a few seconds, you can automatically set the exposure mode to Dual Program, film advance mode to Single Frame and exposure metering system to Matrix Metering. This cancels flexible program, exposure compensation and multiple exposure. For all other modes, prior settings remain the same. When using this technique, it is not necessary to rotate the command dial.

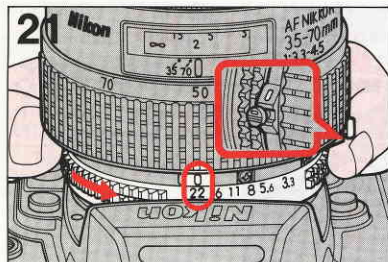


Set lens to its minimum aperture (largest f-number).


With AF Nikkor lenses, lock lens aperture at its minimum setting. (See lens instruction manual.)



Position viewfinder focus brackets on main subject.

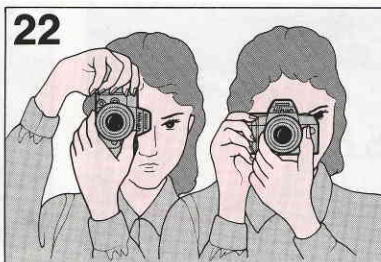

Aim camera at subject.

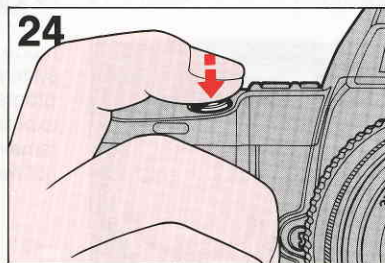


Lightly press shutter release button. Do not touch focus ring when the focus mode selector is set to S or C.

www.butkus.us




Confirm in-focus LCD indicator • appears in the viewfinder.

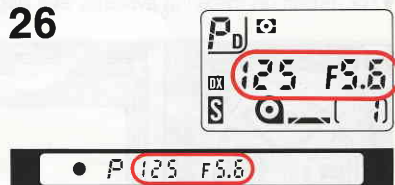


Confirm exposure. When exposure is correct, shutter speed and aperture appear in the viewfinder and in the LCD panel.

x P 125 F5.6

- If x appears in the viewfinder, autofocus is not possible with that subject. Set focus mode selector to M and focus on the clear matte field. See Focus section, pages 23 to 31.
- In S (Single Servo Autofocus) mode, shutter cannot be released until the in-focus indicator LCD appears; once it **does** appear, focus is locked as long as the shutter release button remains lightly pressed. If subject moves and focusing distance changes, refocus by briefly removing finger from shutter release button and lightly pressing again to reactivate autofocus operation.




● P 30 F3.8



● P HI F3.2



● P Lo F3.8



● P FEE


If a shutter speed of 1/30 sec. or slower appears in the LCD display panel, picture blur may occur due to camera shake or subject movement. Use a tripod to avoid camera shake, or consider using flash exposure.

If "HI" appears in the shutter speed position, it indicates overexposure; use film with a lower ISO speed.


If "Lo" appears, it indicates underexposure; use a Nikon speedlight.

If "FEE" appears in the aperture position, lens is not set to the smallest aperture setting and shutter locks. Set lens to smallest aperture.

● In all cases, beeper sounds (if set).




When shooting in dark situations, viewfinder display is automatically illuminated by lightly pressing the shutter release button. Whenever you want to illuminate the viewfinder display regardless of the light conditions, press viewfinder illumination button while viewfinder display stays on. In both cases, the illumination turns off as viewfinder display disappears. It also turns off during exposure.

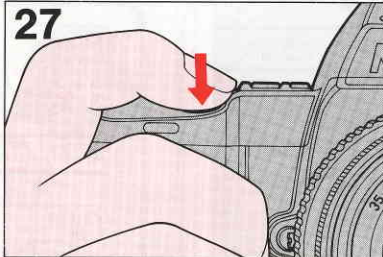


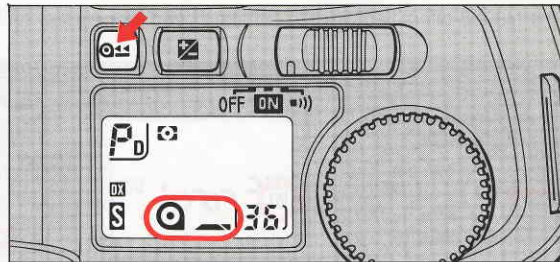

Fully depress shutter release button to take the picture and advance film by one frame. LCD panel frame counter increases by 1.

Shutter speed and aperture indicators turn off approx. 2 sec. after you release the shutter and remove your finger from the shutter release button.


REWINDING FILM

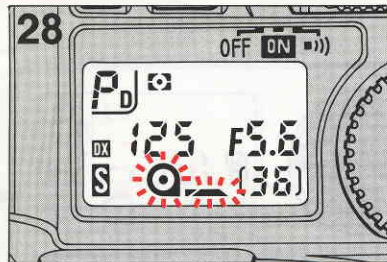


Film advance stops automatically at end of roll and  mark blinks. Beeper sounds (if set).




Press film rewind button and multiple exposure/film rewind button.


 mark appears in the LCD panel, and the frame counter will count backwards until rewinding is complete.

● To rewind film before reaching the end of the roll, press both buttons.

If you do not rewind film when you come to the end of the roll, each time the shutter release button is depressed,  mark blinks for a few seconds and a beeper sounds (if set) to remind you to rewind film.

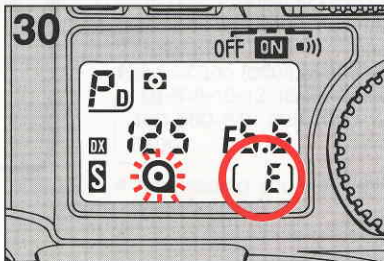

After rewinding stops (automatic), confirm frame counter shows "E," and film installation mark blinks.

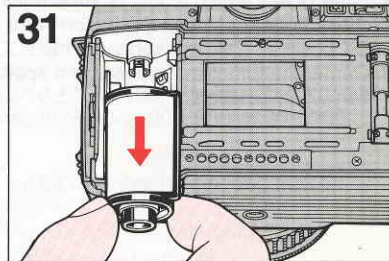


Open camera back and remove film cartridge.

CONTROLS IN DETAIL

FILM SPEED SETTING


The N8008 offers two ways to set film speed, depending on film in use.

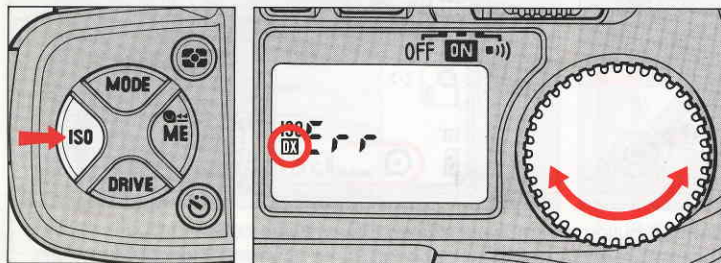


Using DX-Coded Film

Usable film speed range for DX-coded film is ISO 25 to 5000.



1. Slide power switch to ON or (II) position.
2. While pressing film speed button (ISO), rotate command dial and set to DX position. "DX" will appear in the LCD panel.
3. Camera automatically senses film speed (ISO 25 to 5000) of DX-coded film when installed.

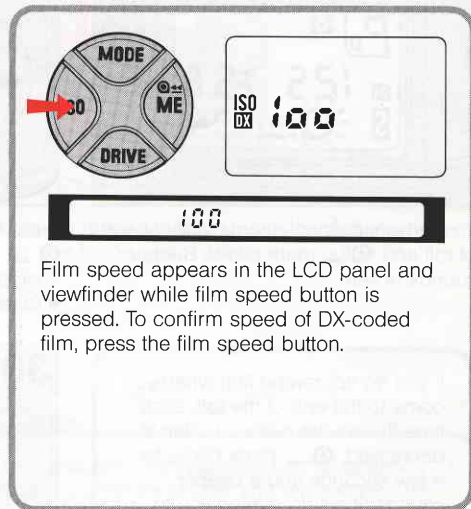

Film speed appears in the LCD panel and viewfinder while film speed button is pressed. To confirm speed of DX-coded film, press the film speed button.



With dial set at DX position, use only DX-coded film. If non-DX-coded film or film with an unacceptable DX code is loaded, the Err, ISO and DX marks in the LCD panel blink, beeper sounds (if set) and the shutter locks. Set manually to the correct ISO setting.

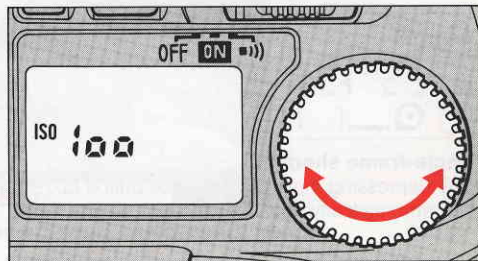

Manual Film Speed Setting

Usable range for manual film speed settings is ISO 6 to 6400.

1. Slide power switch to ON or position.
2. While pressing film speed button, rotate command dial and set to film's ISO number.

• Film speed setting display changes as follows:

6-8-10-12-16-20-25-32-40-50-64-80-100-125-160-200-250-320-400-500-640-800-1000-1250-1600-2000-2500-3200-4000-5000-6400

- After loading, you can confirm the ISO number by pressing the film speed button.
- If DX-coded film is loaded, but the film speed is set manually, the camera gives priority to the manually set ISO number.


FILM ADVANCE MODE

Nikon N8008 has three automatic film advance modes.



Single-frame shooting




Fully depressing the shutter release button takes one picture then automatically advances the film by one frame.



Continuous shooting

Shots are taken continuously as long as the shutter release button is depressed. High- or low-speed continuous shooting can be selected.


In CH (Continuous High) shooting mode, shooting speed is approx. 3.3 fps; in CL (Continuous Low) shooting mode, shooting speed is approx. 2.0 fps (in Continuous Servo Autofocus or manual focus mode, with new batteries at normal temperatures, and a shutter speed faster than 1/125 sec.). As the shutter speed becomes slower, the motor speed becomes proportionately slower.

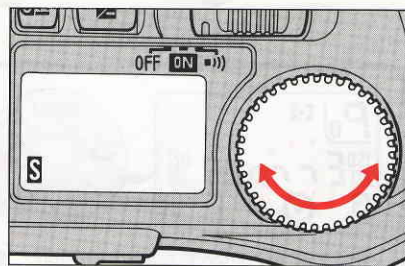

Mode Selection

While pressing the film advance mode button (DRIVE), rotate command dial to select film advance mode. S, CL or CH will appear in the LCD panel.

• The display changes as follows:





- With the autofocus mode set to Single Servo so the shutter is released only when the subject is in focus, continuous shooting speeds may vary.
- With the autofocus mode set to Continuous Servo, the autofocus lens does not operate between exposures in CH (Continuous High) shooting mode. It will work in CL (Continuous Low) shooting mode however, and to do so, requires a short lens operation time.

FOCUS

AUTOFOCUS

Nikon N8008 provides two autofocus modes, Single Servo Autofocus and Continuous Servo Autofocus. Both work well with ordinary subjects, but for unusually fine subjects, such as a blank wall, autofocus may be difficult.




Single Servo Autofocus mode

In Single Servo Autofocus mode (S), the shutter cannot be released until subject is correctly focused, and once in focus, the focus remains locked for as long as the shutter release button is lightly pressed.

Continuous Servo Autofocus mode

In Continuous Servo Autofocus mode (C), the camera continues focusing for as long as you keep the shutter release button lightly pressed and the reflex mirror is in the viewing position. The shutter release button can be fully depressed anytime.

- In Continuous Servo mode, focusing sharpness depends on subject speed and direction; autofocus may not always operate fast enough to follow certain subjects.





Continuous Servo Autofocus Mode

1. Set focus mode selector to C for Continuous Servo Autofocus.
If the lens has an A-M switch, set switch to A.
2. Position viewfinder focus brackets on main subject.
3. Lightly press shutter release button to start Continuous Servo Autofocus function.
4. Confirm the viewfinder in-focus indicator appears, then fully depress shutter release button to take a correctly focused picture.


If in-focus indicator LCD does not appear and X appears, see page 31.

Taking Pictures with an Off-Center Main Subject


Single Servo Autofocus mode

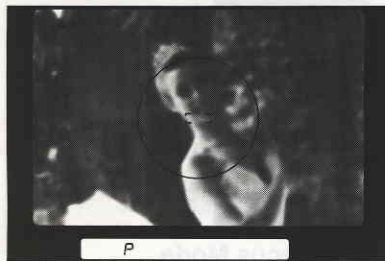

1. Position focus brackets on subject and lightly press the shutter release button.

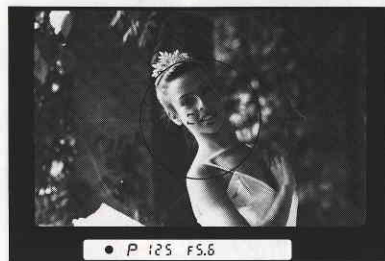



2. Confirm in-focus indicator LCD appears in the viewfinder.





3. Keeping the shutter release button lightly pressed, recompose, then fully depress shutter release button.

www.butkus.us



Continuous Servo Autofocus mode Use AFL (Autofocus Lock) button.

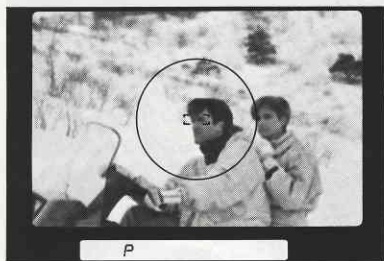

1. Position focus brackets on subject and lightly press the shutter release button.

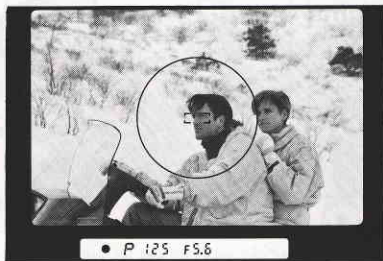


2. Keeping shutter release button lightly pressed, confirm in-focus indicator LCD appears, then depress AFL button and hold in.

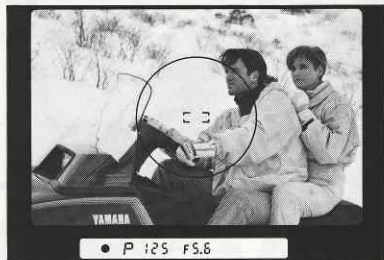

3. With AFL button depressed, recompose as desired and fully depress shutter release button.

- With AFL button depressed, focus will be locked even if you remove your finger from the shutter release button.
- AFL button can also be used in Single Servo Autofocus mode.



Autofocusing with Optional Autofocus Speedlights



Although the N8008's autofocus works at lighting levels as low as EV minus 1, performance may vary depending on subject detail and contrast. Under these dim conditions, however, you may want to use Nikon speedlights during AF operation (1) if it is too dark, or (2) if it is dim and the subject has poor contrast.

The AF Illuminator lights up only in Single Servo Autofocus mode.


1. Mount Nikon Autofocus Speedlight SB-24, SB-23, SB-22 or SB-20 on the N8008's accessory shoe.
2. Compose subject in viewfinder and lightly press shutter release button.
3. Speedlight's AF illuminator lights up and autofocus operation begins.

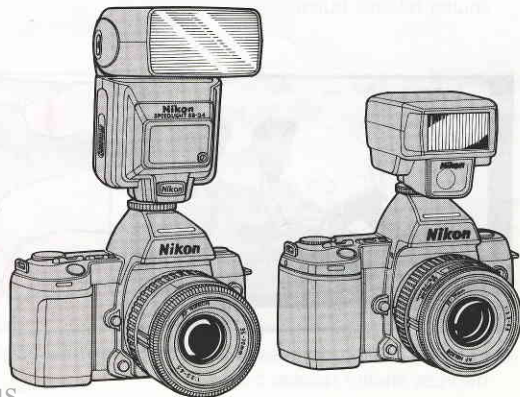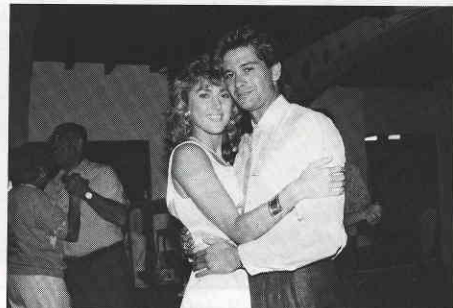

For details, see Nikon speedlight instruction manual.

www.butkus.us




MANUAL FOCUS WITH ELECTRONIC RANGE FINDER

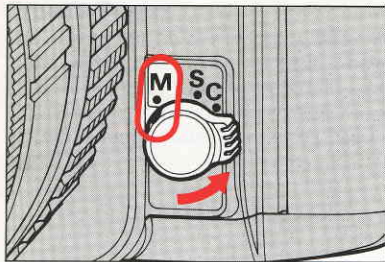


1. Set focus mode selector to M (manual). If lens has an A-M switch, set to M.



2. Look inside viewfinder and position focus brackets on the main subject.
Lightly press shutter release button.



3. Keeping shutter release button lightly pressed, watch in-focus indicator LCD inside the viewfinder.
 - If focus-to-left arrow (rear focus) or focus-to-right arrow (front focus) appears, manually rotate lens focusing ring in the direction indicated until the in-focus indicator LCD appears.
 - If focus-to-left arrow does not disappear when you turn focus ring counterclockwise to the limit, subject is closer than lens' closest focusing distance. Move back from subject.
 - If focus-not-possible indicator x appears, use clear matte field for focusing. See page 30.





4. Confirm in-focus indicator LCD, then fully depress shutter release button.

- Manual focus using the electronic range finder works with all AF Nikkor and other Nikon lenses. (For a complete list of usable lenses, see lens compatibility chart, page 72.) Lenses with a maximum aperture slower than f/5.6 are not suitable for electronic range finder focusing, even though focus indicator LCDs appear. Focus on clear matte field or change focusing screen to J type.

Freeze Focus

The optional Nikon Multi-Control Back MF-21, when attached to the N8008, offers a freeze focus function which automatically fires the shutter when subject is in a preset focus position. This feature is especially convenient for manual focus with electronic range finder. For details, see instruction manual of the MF-21.

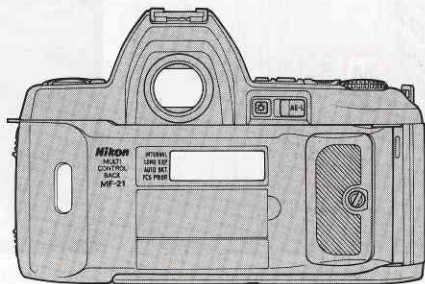

P 1/25 F5.6




P 1/25 F5.6



● P 1/25 F5.6


MANUAL FOCUS USING CLEAR MATTE FIELD

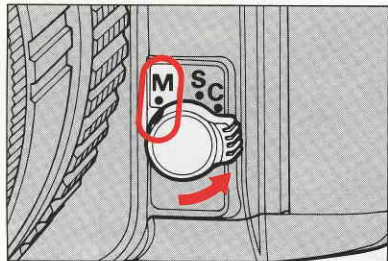

1. Set focus mode selector to M (manual).




2. Focus subject using clear matte field.

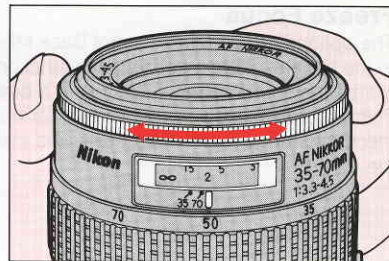


SPECIAL FOCUSING SITUATIONS

Autofocus operation and electronic range finder depend on general lighting, subject contrast and details, and other technical points. In situations where autofocus is not possible, we recommend manual focus using the clear matte field. Focus-not-possible alert x appears with the following subjects:



1. Very dark subject

Focus manually, or for autofocus, focus on another, brighter subject located at same distance and wait until the in-focus indicator LCD appears in the viewfinder. Or use a Nikon autofocus speedlight with AF illuminator.



2. Low-contrast subject

Focus manually, or for autofocus, focus on another subject at the same distance but with more contrast, until in-focus indicator LCD appears.

In the following situations, ignore in-focus indicator LCD and focus manually using the clear matte field.


1) When shooting the following:

- Bright subject with a shiny surface, such as silver or aluminum.
- Strongly backlit subject.
- Scene with subjects located at different distances.

2) When using a linear polarizing filter, or special filter such as a soft-focus filter. (Circular polarizing filter can be used for autofocus operation.)

EXPOSURE

Exposure control consists of two parts — aperture and shutter speed control. Together, these determine the amount of light that strikes the film to ensure precise exposure control. Nikon N8008 offers three Programmed Auto modes plus Shutter-Priority Auto, Aperture-Priority Auto, and Manual exposure modes.

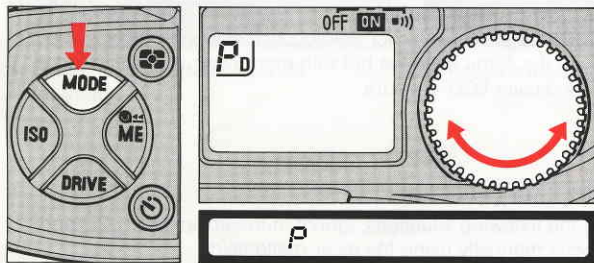

Exposure Mode Setting

While pressing exposure mode button (MODE), rotate command dial. Exposure mode changes in the following sequence.

—P DUAL(Dual Program)—S(Shutter-Priority Auto)—
A(Aperture-Priority Auto)—M(Manual)—
P HI(High-speed Program)—P(Normal Program)—

P₀, S, A, M, P^H, or P will appear in the LCD panel accordingly.
P (P DUAL, P, P HI), S, A, or M will appear in the viewfinder.

PROGRAMMED AUTO EXPOSURE MODES


Programmed Auto exposure modes can only be used with lenses having a built-in CPU such as AF Nikkors and the 500mm f/4 P. For lenses without a CPU, exposure mode is automatically set to Aperture-Priority Auto (A) and metering system to Center-Weighted. (Exposure mode indicator and Matrix Metering mark blink, if set.)

Three Programmed Auto exposure modes are provided — P DUAL for dual, P for normal, and P HI for high-speed program. In **P DUAL (Dual Program)** mode, the camera automatically selects either normal or high-speed program depending on the focal length of the lens in use. Normal is selected for lenses with focal lengths shorter than 135mm. High-speed is for lenses with focal lengths of 135mm or longer to reduce the possibility of blurred pictures due to subject movement or camera shake. With zoom lenses, depending on the focal length setting, either normal or high-speed program will be selected.

Setting the exposure mode to **P (Normal Program)** or **P HI (High-speed Program)** lets you choose normal or high-speed program. For a higher shutter speed, such as when using a telephoto lens or for shooting a fast-moving subject, P HI is recommended.


Dual Program Chart (e.g., 50mm f/1.4, ISO 100)

The EV (exposure value) chart demonstrates the difference between N8008's normal and high-speed programs. Follow either colored line to where it intersects a diagonal line. This shows the combination of aperture (vertical line) and shutter speed (horizontal line).

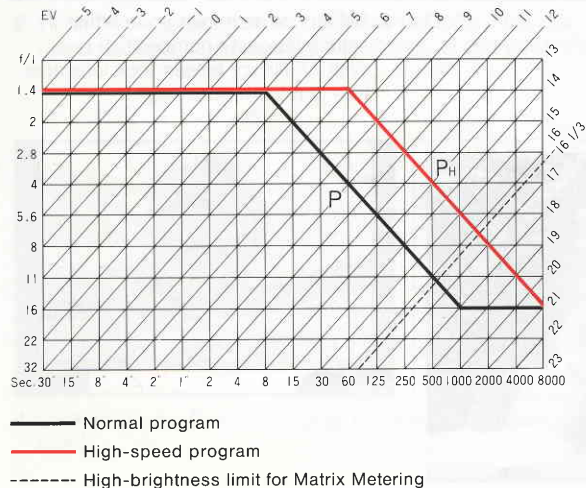

Flexible Program

In Programmed Auto (PD, P, PH) exposure modes, you can temporarily change an automatically set combination of shutter speed/aperture by 1 EV step while maintaining the correct exposure. This is particularly useful for selecting a specific shutter speed or aperture when you want to automatically return to standard programmed exposure control after.

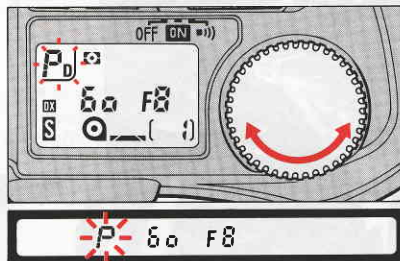

1. Lightly press shutter release button.
 2. Turn command dial until desired shutter speed or aperture value appears in the viewfinder and LCD panel.
- When program is shifted, exposure mode indicator blinks in the LCD panel and viewfinder.
 - As soon as the display in the LCD panel and viewfinder disappears, flexible program is cancelled.

SHUTTER-PRIORITY AUTO EXPOSURE MODE

This mode lets you choose shutter speeds manually to freeze the action with sharp, clear images using a fast shutter speed, or create motion effects by choosing slower shutter speeds. N8008's microcomputer automatically selects the correct aperture to match your shutter speed.


This mode is available with lenses having a built-in CPU such as AF Nikkors and the 500mm f/4 P.





At a fast shutter speed




At a slow shutter speed

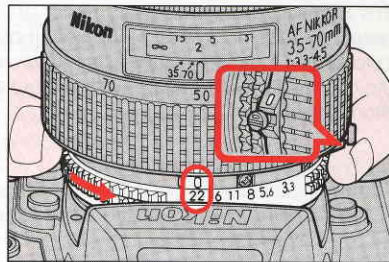


1. Set lens to its minimum aperture setting (largest f-number).
With AF Nikkor lenses, lock lens aperture at minimum setting.

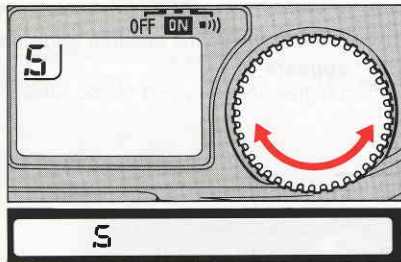

2. While pressing exposure mode button (MODE), rotate command dial until "S" appears in the LCD panel and viewfinder.




4. Look inside viewfinder and lightly press shutter release button.

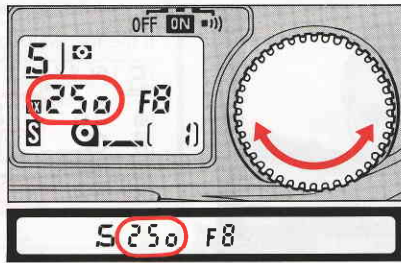

3. Remove finger from exposure mode button, and rotate command dial to select desired shutter speed.
- Shutter speed changes 1 step at a time in the following sequence:
30"-15"-8"-4"-2"-1"-2-4-8-15-30-60-125-250-500-1000-2000-4000-8000




5. Confirm aperture value.
Camera selects correct aperture to the shutter speed you set.

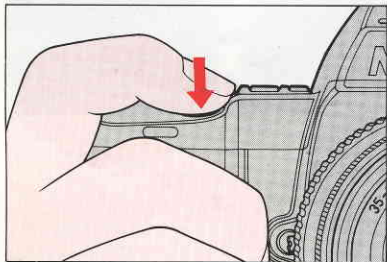

6. Fully depress shutter release button to take a picture.

If the following indication appears where the aperture value is shown:




"HI" appears*

Select higher shutter speed or use Nikon ND filter.



"Lo" appears*

Select slower shutter speed, or use a Nikon speedlight.



"FEE" appears

Set lens to smallest aperture setting. Shutter speed disappears and shutter locks.



* Electronic Analog Display appears to show value difference from correct exposure.

- In all cases, beeper sounds (if set).
- For lenses without built-in CPU, exposure mode is automatically set to Aperture-Priority Auto (A) and metering system to Center-Weighted. (Exposure mode indicator and Matrix Metering mark blink, if set.)

APERTURE-PRIORITY AUTO EXPOSURE MODE



The N8008's microcomputer automatically selects the correct shutter speed to match the aperture you set. This is the recommended mode when depth of field is your prime consideration. For softer, less distinct backgrounds, as in portraiture, use larger apertures. For overall sharp, clear pictures, such as scenic photography, use smaller apertures.





At wide aperture





At small aperture

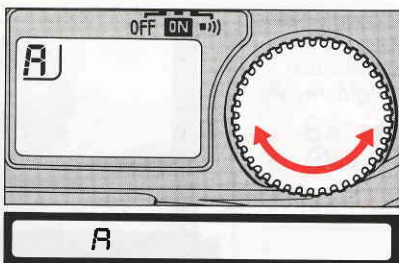

1. While pressing exposure mode button (MODE), rotate command dial until "A" appears in the LCD panel and viewfinder.

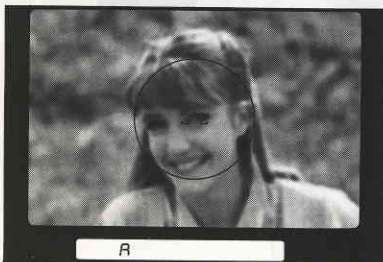


3. Look in viewfinder and lightly press shutter release button.

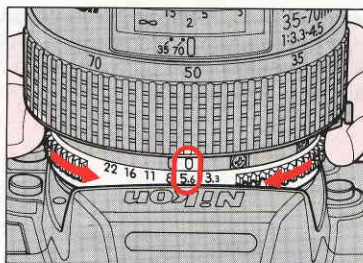

2. Remove finger from exposure mode setting button and set lens to desired f-number by rotating lens aperture ring.
 - Aperture changes in the following sequence, as indicated in the LCD display panel.
F1-F1.4-F2-F2.8-F4-F5.6-F8-F11-F16-F22-F32-F45-F64
An intermediate figure (e.g. F1.8, F3.3) appears to indicate a lens' maximum aperture. Also, with zoom lenses, the maximum aperture for different focal length settings appears in 1/6 EV steps.




4. Confirm shutter speed.
Camera selects the correct shutter speed to match your aperture setting.

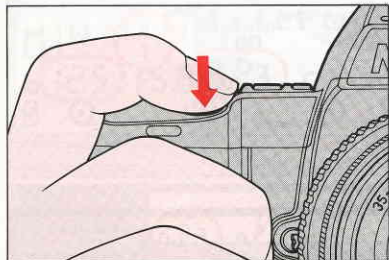


5. Fully depress shutter release button to take the picture.

If the following indication appears in the shutter speed position:




1/30 sec. or slower

Subject movement and camera shake may cause picture blur. Select faster aperture setting, or use tripod.



"HI" appears*

Select smaller aperture setting (larger f-number).



"Lo" appears*

Select larger aperture setting or use a Nikon speedlight.




* Electronic Analog Display appears to show value difference from correct exposure.




- In all cases, beeper sounds (if set).
- For lenses without a built-in CPU, "F--" appears where the aperture value is shown in the LCD panel and viewfinder.

MANUAL EXPOSURE MODE

In Manual exposure mode, both shutter speed and aperture can be set manually to achieve your desired effect. Use fast shutter speeds to stop the action, slower speeds to create motion effects or less distinct outlines. Manually setting the exposure mode also lets you control depth of field, either by softening the background so the main subject of the picture stands out, or by creating overall uniform sharpness.


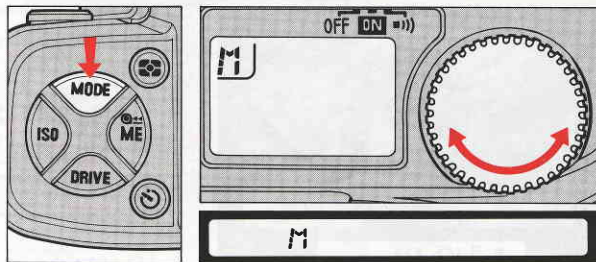


1. While pressing exposure mode button (MODE), rotate command dial until "M" appears in the LCD panel and viewfinder.

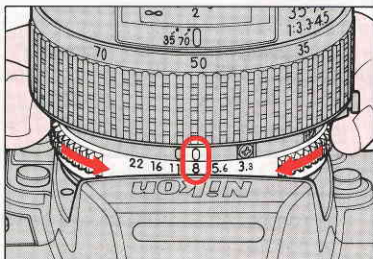
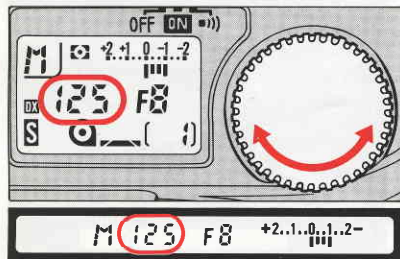


2. Remove finger from exposure mode button, and set shutter speed using the command dial, and aperture using the lens aperture ring.

www.butkus.us

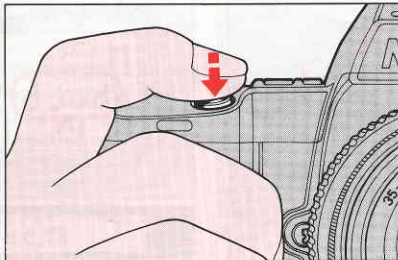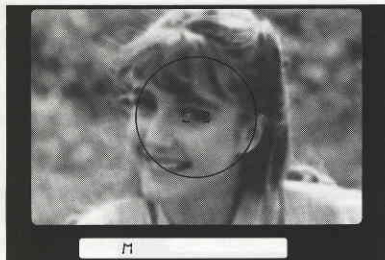

3. Look inside viewfinder and lightly press shutter release button.

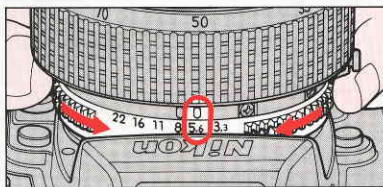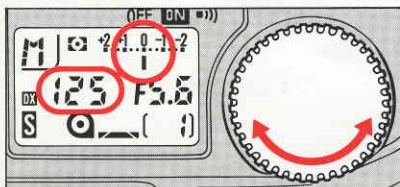

4. Adjust aperture and/or shutter speed until the Electronic Analog Display indicates 0 or the desired exposure.

The Electronic Analog Display range is +2EV to -2EV, in increments of 1/3EV.

◀ and ▶ appear when exposure is beyond ±2EV.

Examples:


+2..1..0..1..2-
◀■■■■■
Over +2EV

+2..1..0..1..2-
■■■■■
+2EV


+2..1..0..1..2-
|
±0EV

+2..1..0..1..2-
■■■■■
-2/3EV

+2..1..0..1..2-
■■■■■▶
Below -2EV



5. Confirm correct exposure and fully depress shutter release button to take the picture.

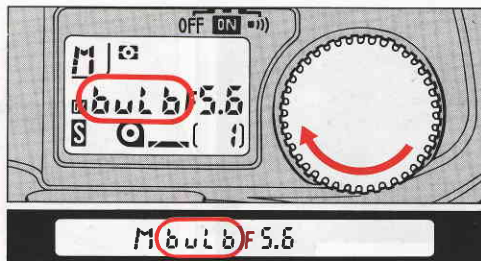

Bulb Setting

At Bulb setting, the shutter remains open as long as the shutter release button remains depressed. This setting can only be used in manual exposure mode. Rotate command dial clockwise until "bulb" appears.

For lenses without a built-in CPU, "F--" appears where the aperture value is shown in the LCD panel and viewfinder.


With the bulb setting, changing the exposure mode to shutter-priority auto causes "bulb" to blink, and shutter is locked.

PHOTOGRAPHIC TECHNIQUES




EXPOSURE METERING SYSTEMS


Matrix Metering and 75/25 Center-Weighted Metering

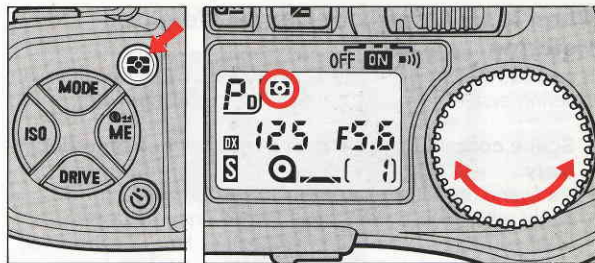Nikon N8008 features two types of exposure metering systems, Matrix and Center-Weighted. In Matrix Metering, the meter automatically provides the main subject with correct exposure in any lighting situation, without having to use manual exposure compensation. The Matrix Metering sensor consists of five segments and determines scene brightness by dividing the scene into five areas, analyzing each area for (1) brightness and (2) scene contrast. According to these key data, the scene is classified into one of 25 matrix "boxes", each containing one or more algorithm patterns. Depending on other scene information, the N8008 chooses the appropriate algorithm. For times when you want to do it yourself, select Center-Weighted Metering. This overrides Matrix Metering and concentrates 75% of the meter's sensitivity in the center of the viewfinder, outlined by a 12mm circle.



Metering System Selection

1. Slide main switch to ON or .
2. While pressing metering mode button, rotate command dial.
3. Confirm Matrix Metering mark  or Center-Weighted Metering mark  appears in the LCD panel.

For lenses without built-in CPU, the metering system is automatically set to Center-Weighted. If set to Matrix Metering,  blinks.

When to Use Matrix or Center-Weighted Metering

In scenes with both very bright and very dark areas, these two metering systems produce varying results. For example:

1. Scene containing the sun or scenes with high reflectivity

If a scene contains highlights, such as the sun, snow or bright reflections, Center-Weighted Metering renders the main subject as a silhouette. With Matrix Metering, however, the light value of darker parts is evaluated, resulting in an overall well-balanced exposure.


2. Outdoor backlit subject

With Center-Weighted Metering, a backlit subject or scene with people against a bright sky and/or clouds may lead to an underexposed shot. With Matrix Metering, however, the camera automatically gives more exposure to dark subjects to ensure a correct overall exposure.

3. Front-lit subject against dark background

If a brightly lit off-center subject is positioned against a dark background, Center-Weighted Metering places too much emphasis on the dark center of the picture. So although the background is correctly exposed, the main subject will be overexposed. Matrix Metering, however, automatically integrates a dark background with a bright subject to ensure the best overall exposure.

Scene containing the sun

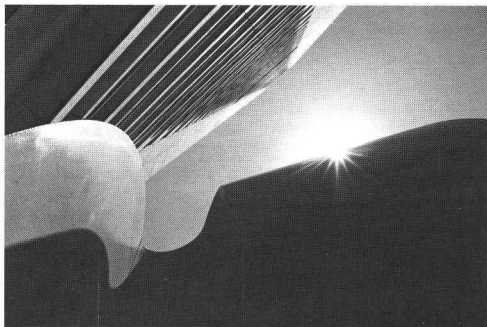

Matrix Metering



Center-Weighted Metering

Outdoor backlit subject




Matrix Metering




Center-Weighted Metering

Front-lit subject

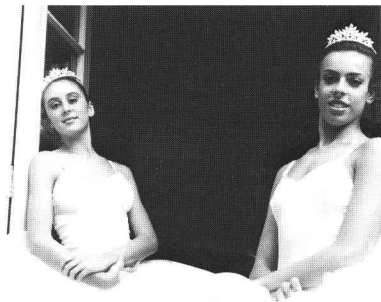

Matrix Metering

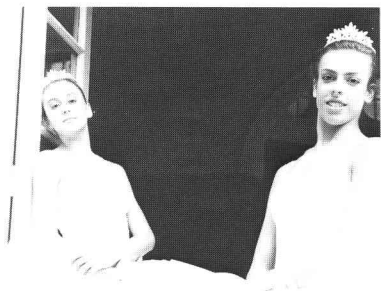

Center-Weighted Metering

4. Small dark subjects against a bright background

A subject significantly smaller than any of the Matrix Metering sections may not be recognized and integrated into the automatic exposure evaluation. For such subjects, use AE Lock or Center-Weighted Metering with manual exposure compensation.



Center-Weighted Metering (w/AE Lock)



Matrix Metering




Center-Weighted Metering (w/o AE Lock)

5. Sunset scenes

When you want to emphasize a dramatic sunset but don't want Matrix Metering to lighten the scene for a dark foreground subject, use AE Lock or Center-Weighted Metering.



Matrix Metering



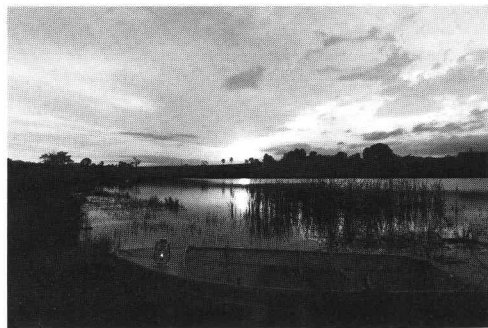


Center-Weighted Metering


EXPOSURE COMPENSATION

In Automatic Exposure Modes


AE (Auto Exposure) Lock Lever

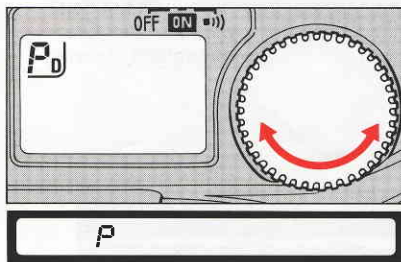

1. Set exposure mode to Programmed (PD, P, PH), Shutter-Priority Auto (S) or Aperture-Priority Auto (A).

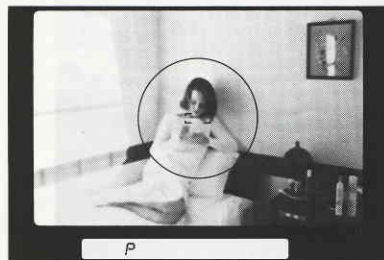


2. Center main subject inside viewfinder or move in closer.

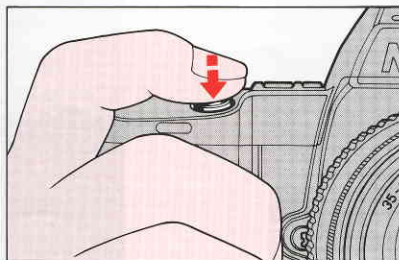


3. Lightly press shutter release button, and confirm shutter speed and aperture in the viewfinder.




www.butkus.us

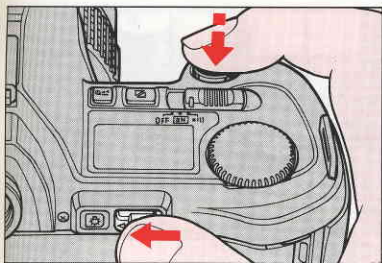

4. While lightly pressing shutter release button, slide AE Lock lever and hold in.

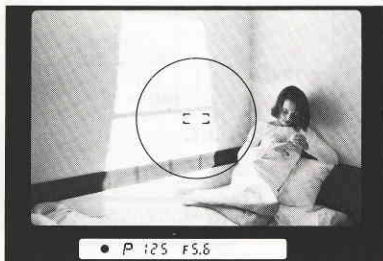


5. Recompose and shoot.

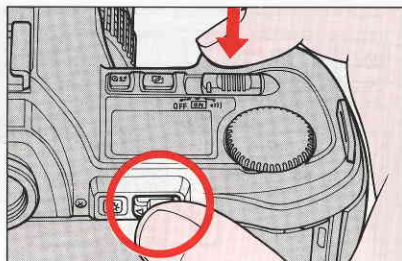

- In Single Servo AF mode, before releasing shutter, be sure to refocus by briefly removing your finger from shutter release button and lightly pressing again to reactivate autofocus function.
- Center-Weighted Metering system is recommended.
- When using AE Lock lever, beeper does not sound for exposure.

EXPOSURE COMPENSATION

Exposure Compensation Button

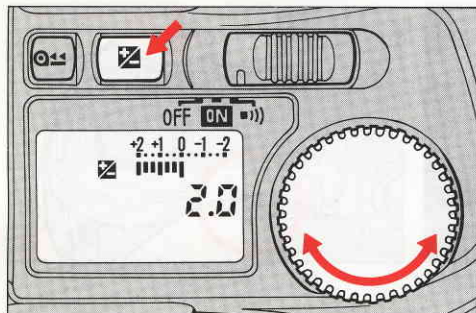

2.0 +2.1 0 -1 -2

Using the exposure compensation button, you can compensate exposure within the range of $\pm 5\text{EV}$.

While pressing exposure compensation button, rotate the command dial to set desired compensation value. The following display appears in the LCD panel and viewfinder:

☒ mark

Electronic Analog Display with indications from -2 to $+2$ EV in 1/3 steps


Compensation value (from -5 to $+5$ EV in 1/3 steps)

- ☒ mark stays on during compensation, but compensation value and Electronic Analog Display disappear after you remove finger from exposure compensation button. To confirm compensation value, press button again.
- Once set, exposure compensation remains fixed until set again.
- Exposure compensation can also be achieved by setting film speed manually. See page 21.

(In Center-Weighted Metering)




Without compensation

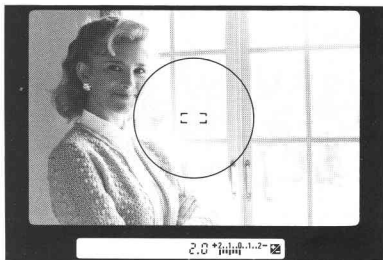


+2EV compensation



Examples:




Over +2EV




-2/3EV




+2EV







Below -2EV



±0EV






In Manual Exposure Mode

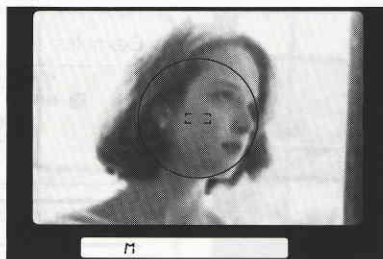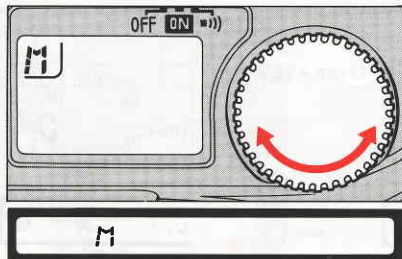

1. Set exposure mode to Manual (M).

2. Center main subject inside viewfinder, and lightly press shutter release button.

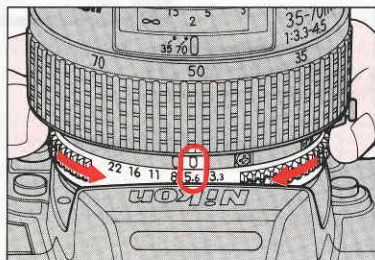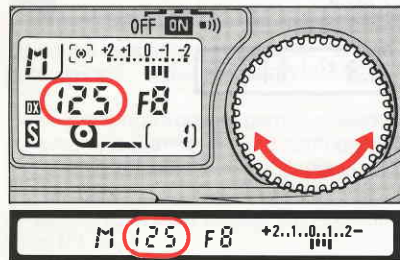


3. Adjust shutter speed and aperture until the Electronic Analog Display indicates 0 or desired exposure.

www.butkus.us




4. Confirm shutter speed and aperture in the viewfinder.

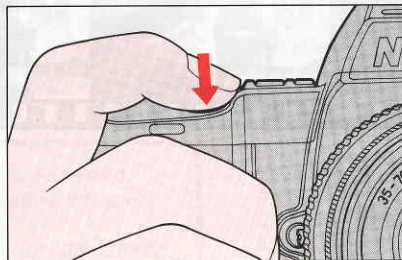

5. Recompose and shoot.


Auto Exposure Bracketing

By attaching the optional Nikon Multi-Control Back MF-21 to the N8008 you can take advantage of auto exposure bracketing to produce a variety of exposures for the same subject, each one suiting specific needs and/or tastes. This lets you shoot up to 19 continuous frames, each with a different exposure. For details, see the MF-21 instruction manual.

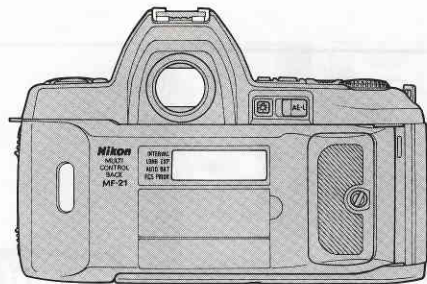

www.butkus.us

DEPTH-OF-FIELD PREVIEW BUTTON

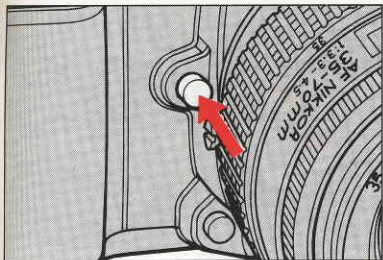

When a lens with an automatic diaphragm is used, the viewfinder image is viewed with the lens at maximum aperture. By depressing the depth-of-field preview button however, the lens is stopped down to the aperture set, enabling you to examine depth of field before shooting. The viewfinder image normally darkens as the aperture gets smaller. Those portions of the picture that appear in focus when the button is pushed down are in the zone of sharpest focus.

While the depth-of-field preview button is depressed, shutter speed disappears and F-- appears in the aperture position. Shutter locks.

Depth of field can only be previewed in Aperture-Priority Auto (A) or Manual (M) exposure modes.

Stop-Down Exposure Metering

For lenses without automatic diaphragm

When the automatic diaphragm ring does not couple with the meter coupling lever of the camera, such as when using a PC-Nikkor or bellows attachment, focusing should be done with the lens wide open while exposure measurement and shooting must be done with the lens stopped down.

In A mode:

Take a shot with the lens stopped down. With a PC-Nikkor, correct exposure must be determined before **shifting**. To do this, first use the AE Lock, then the lens can be shifted to take the shot.

In M mode:

Stop down the lens to determine the correct exposure, then take the shot.

For lenses with fixed aperture

Because aperture is fixed when using Reflex-Nikkor lenses, for photomicrography or for telescopic photography, it is impossible to change the exposure by varying the aperture.


In A mode:

Take the shot by simply depressing the shutter release button.

In M mode:


Select the appropriate shutter speed for correct exposure. If a correct exposure cannot be obtained, use either an ND filter (if the scene is too bright) or supplementary illumination (if too dark).

SELF-TIMER

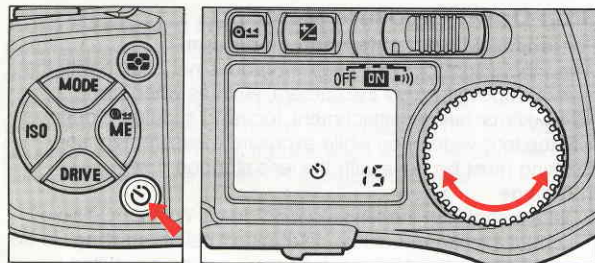


Using the self-timer activates autofocus and auto exposure operation.

1. Slide power switch to ON or .
2. While pressing self-timer button , rotate command dial to set desired timer duration.
Timer duration can be selected between 2 to 30 seconds in one second increments.
3. Confirm self-timer mark and timer duration in the LCD panel.

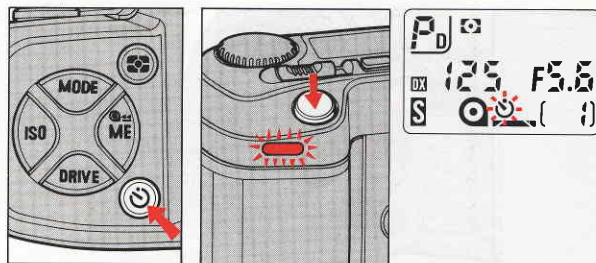


4. Compose picture and confirm focus and exposure.
5. While pressing self-timer button, fully depress shutter release button.
Self-timer LED starts blinking, beeper will sound (if set) and self-timer indicator blinks. For the final two seconds, the blinking LED and beeper speed up, telling you to get ready.

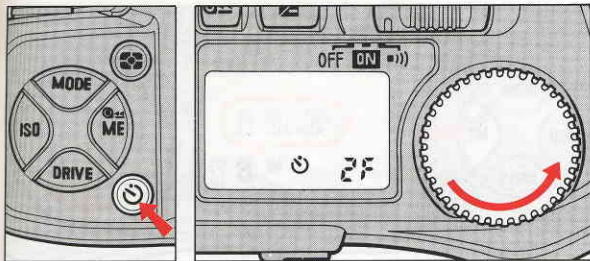

Two-Shot Self-Timer

It is possible to take two consecutive self-timer pictures. While pressing the self-timer button, rotate the command dial counterclockwise until "2F" appears at the timer duration position in the LCD panel. In consecutive self-timer shooting, the shutter is released for the first shot after approx. 10 sec., and the second shot is taken 5 sec. later.



- To cancel self-timer after activating, press self-timer button again.
- In self-timer operation, shutter is released whether subject is in focus or not, even in Single Servo Autofocus mode.
- In self-timer operation, when focus mode is set to either Single Servo Autofocus or Continuous Servo Autofocus, lightly pressing the shutter release button activates autofocus operation.
- Exposure is locked when self-timer operation starts.
- In Programmed, Shutter-Priority, or Aperture-Priority Auto exposure mode, use eyepiece cover DK-8 (provided) to prevent stray light from entering the viewfinder and affecting exposure.




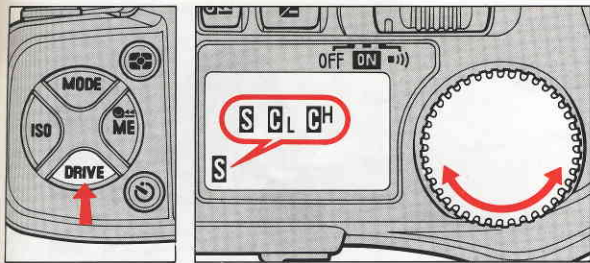
- Regardless of film advance mode setting, continuous-frame shooting is not possible (except for two-shot self-timer operation).

MULTIPLE EXPOSURE PHOTOGRAPHY

Multiple exposures are created by taking pictures of different subjects or successive pictures of one subject on the same frame. Up to 9 exposures can be set, using a variety of exposure techniques.

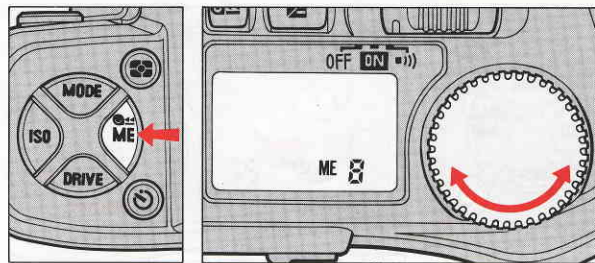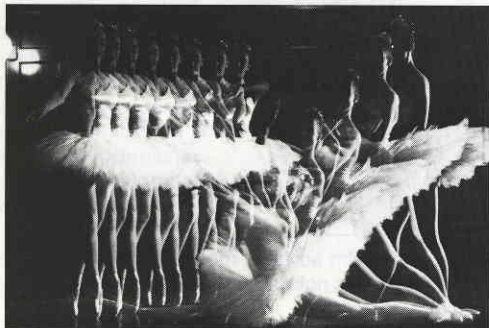

1. Slide power switch to ON or ).
2. While pressing multiple exposure button (ME), rotate command dial to set desired number of exposures.
3. Confirm multiple exposure indication "ME" and number of exposures in LCD panel.




4. While pressing film advance mode button, rotate command dial to select S, CL or CH.

ME-S: For single exposure at one shutter release.

ME-C (CH or CL mode): For multiple exposures at a single shutter release.

Compose picture, confirm focus and exposure, and fully depress shutter release button. The exposures number indication in the LCD panel counts down with each exposure. "ME" mark blinks during multiple exposures.

- In ME-C mode, exposures are taken continuously as long as the shutter release button is fully depressed. To stop shooting, remove finger from the button.
- When multiple exposure is complete, film automatically advances to next frame and multiple exposure is cancelled.
- To cancel multiple exposure midway, while pressing the multiple exposure button, rotate the command dial until no number shows. Film advances when you remove finger from the button.

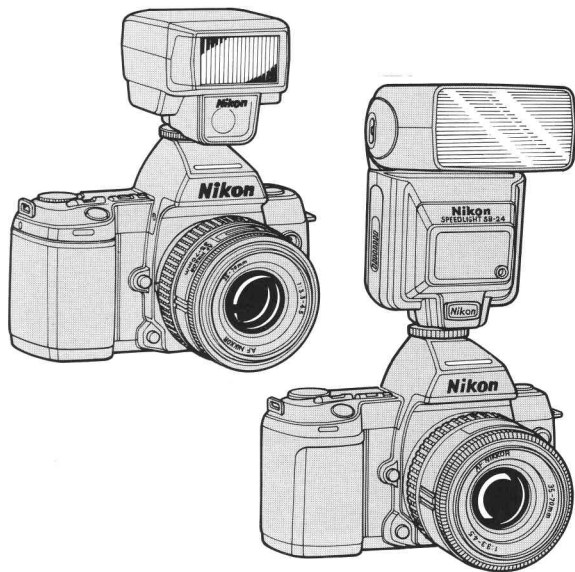


Matrix Balanced Fill-Flash in daylight





Matrix Balanced Fill-Flash at night

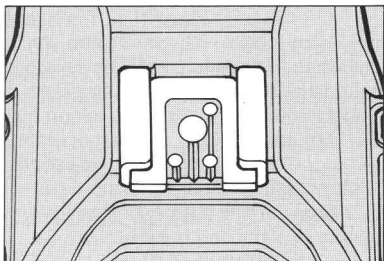www.butkus.us



The Nikon N8008's accessory shoe lets you directly mount a wide range of Nikon dedicated electronic speedlights, including SB-24, SB-23, SB-22, SB-20, SB-18, SB-16B and SB-15. Each unit takes full advantage of the N8008's fine tuned cybernetic controls, which automatically synchronize the camera's shutter and lens aperture to provide precisely controlled exposures. This means you can perform Cybernetic Sync Flash in TTL mode in every flash shooting situation, for beautiful, naturally balanced foregrounds and backgrounds with a truly professional look.

Cybernetic Sync Flash lets you choose any of the four different flash categories shown, matching your speedlight TTL mode with the appropriate metering system and exposure mode.

Speedlight setting		SB-24 at TTL 	SB-23/22/20/ 18/16B/15 at TTL	SB-24 at TTL 
Metering system	Exposure mode			
Matrix Metering	PD/P/PH/S/A	Matrix Balanced Fill-Flash		Matrix TTL Flash
	M			
Center-Weighted Metering	PD/P/PH/S/A	Center-Weighted Fill-Flash		Center-Weighted TTL Flash
	M			

Matrix Balanced Fill-Flash

When taking flash pictures, although the subject is usually well illuminated, background lighting can vary dramatically. This is especially true when the main subject is very close, and the background is relatively dark or only moderately bright.

Matrix Balanced Fill-Flash balances both the subject and background illumination, automatically. How? Matrix Metering adjusts for the background and the TTL flash exposure level, so the flash illumination is balanced and won't overpower the foreground subject. This creates a natural and pleasing effect, filling in harsh shadows and bringing out subject detail without losing the correct background exposure.

This system operates automatically: based on a combination of general scene brightness and contrast, the exposure value for the background is determined by one of five computation methods: Low-Brightness Weighted, Center-Segment, Average, High-Brightness Weighted, or Very-High-Brightness Weighted. Flash exposure value is controlled in a similar way. The combination of ambient light and flash light is balanced to produce a natural and pleasing effect.

In Programmed Auto (PD, P, PH) modes, the sync speed of 1/250 sec. has priority, but when the aperture reaches its largest limit (variable according to ISO film speed), the program line fixes the shutter speed at 1/60 second. Aperture is controlled between f/4 (at ISO 100) and the lens' smallest aperture. In Shutter-Priority Auto (S) mode, you can choose sync speeds from 1/250 to 30 sec., enabling you to shoot, for example, a city-scape of night lights, with automatic flash exposure for foreground subjects. Aperture is controlled between f/2.8 (at any ISO film speed) and the lens' smallest aperture.

In Aperture-Priority Auto (A) mode, you select aperture and the camera selects a suitable sync speed, within a range of 1/60 to 1/250 sec. (at any ISO film speed).

With Manual (M), you control both aperture and shutter speed while the flash exposure is determined by scene brightness and contrast, with Matrix Balanced Fill-Flash control throughout. In S and M modes, when you select a shutter speed faster than 1/250 sec. and then turn the flash unit ON, the N8008 automatically shifts to 1/250 sec.

Matrix TTL Flash

In this mode, although Matrix Metering ensures the background is correctly exposed, the flash level is not automatically compensated. Matrix TTL Flash lets you manually select flash output compensation (on the SB-24) at levels from 1 EV higher to 3 EV lower than standard TTL flash output, for greater personal creativity.

Center-Weighted Fill-Flash

For flash photography in ordinary TTL, or to emphasize detailed background areas, use Center-Weighted Fill-Flash. In this mode, when value measured by center segment is within controlled shutter speed/aperture range, flash output compensation is automatically set 2/3 EV lower than standard TTL flash output, for natural fill-flash photography. (If the value is less than that of the controlled range, standard TTL flash without compensation is selected.)





Center-Weighted TTL Flash

For Center-Weighted Metering without automatic flash output compensation, choose Center-Weighted TTL Flash. This mode lets you choose your own desired level of compensation (on the SB-24), from +1 to -3 EV.


Nikon speedlight SB-24 lets you take advantage of a special photographic technique called rear-curtain sync flash. For details, see page 68.

Shutter Speed/Aperture and Flash Mode Combinations for Each Exposure Mode

In Matrix Metering (With 50mm f/1.4 lens at ISO 100)

Speedlight Expo- sure mode	SB-24					SB-23/22/20/18/16B/15	
	Front-curtain sync			Rear-curtain sync		TTL	Non-TTL auto Manual
	TTL 	TTL 	Non-TTL auto Manual	TTL 	TTL 		
PD P PH	1/60–1/250 f/4–f/16 (1)	1/60–1/250 f/4–f/16 (1)	P, FEE blink Shutter locks Select A or M	30"–1/250 f/4–f/16 (1)	30"–1/250 f/4–f/16 (1)	1/60–1/250 f/4–f/16 (1)	P, FEE blink Shutter locks Select A or M
S	As set (3) f/2.8–f/16 (2)	As set (3) f/2.8–f/16 (2)	S, FEE blink Shutter locks Select A or M	As set (3) f/2.8–f/16 (2)	As set (3) f/2.8–f/16 (2)	As set (3) f/2.8–f/16 (2)	S, FEE blink Shutter locks Select A or M
A	1/60–1/250 As set	1/60–1/250 As set	1/60–1/250 As set (4)	30"–1/250 As set	30"–1/250 As set	1/60–1/250 As set	1/60–1/250 As set (5)
M	As set (3) As set	As set (3) As set	As set (3) As set (4)	As set (3) As set	As set (3) As set	As set (3) As set	As set (3) As set (5)

: Matrix Balanced Fill-Flash (background correctly exposed; TTL flash level automatically compensated)

: Matrix TTL Flash (background correctly exposed; standard TTL flash)


- (1) Maximum usable aperture varies according to film speed in use; minimum aperture is the smallest aperture of the lens in use.
- (2) Maximum usable aperture is $f/2.8$; minimum aperture is the smallest aperture of the lens in use.
- (3) When set from $1/250$ to $1/8000$ sec., the shutter is automatically set to $1/250$ sec.
- (4) Recommended background exposure is displayed. Extra flash level compensation not possible.
- (5) Recommended background exposure is displayed. Normal flash control.

Note: When N8008 shifts from Matrix to Center-Weighted metering, Matrix Balanced Fill-Flash becomes Center-Weighted Fill-Flash (only center segment data is considered; flash level automatically compensated by $-2/3$ EV within controlled shutter speed/aperture range; if less than this range, standard TTL flash is automatically selected), and Matrix TTL Flash becomes Center-Weighted TTL Flash (only center segment data is considered; standard TTL flash selected).


- Usable film speed for TTL flash photography is ISO 25-1000; for non-TTL flash photography, it is 6-6400.
- For details on speedlight operation, see the speedlight instruction manual.
- Use Nikon Speedlights. Other units may damage the camera's electrical circuit due to incompatible voltage requirements, electric contact alignment or switch phase.
- When using a special speedlight with a time-lag provision or when using a speedlight with a long flash duration (i.e., Nikon Repeating Flash SB-6 at $1/2$ or full output or Medical-Nikkor 120mm $f/4$), adjust shutter speed down to $1/125$ sec. or slower.
- When using a speedlight that does not allow automatic sync speed setting, set the camera's exposure mode to Manual.

Matrix Balanced Fill-Flash Operation


The following instructions are for Matrix Balanced Fill-Flash shooting in Programmed (PD, P, PH) mode, the easiest way for normal shooting. For other exposure or TTL modes, or for non-TTL auto and manual flash shooting, see your speedlight instruction manual.

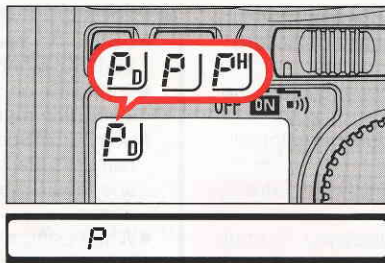


1. Set the N8008 to P DUAL, P or P HI mode.

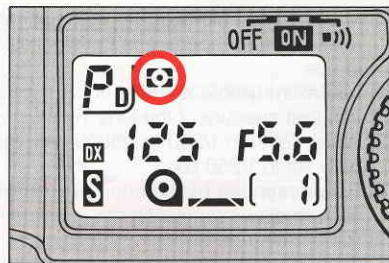


2. Set the N8008 to Matrix Metering system.

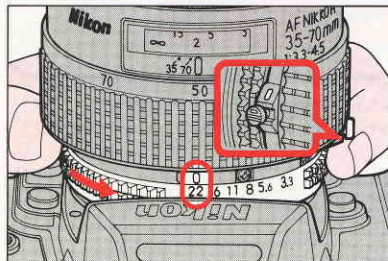


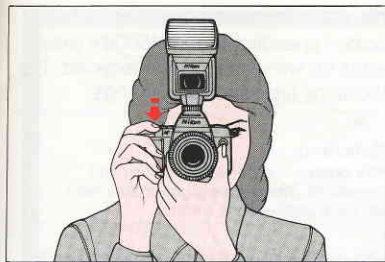
3. Set lens to its minimum aperture (largest f-number).

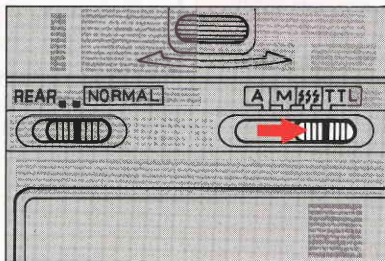



4. Set speedlight's mode selector to TTL. (With SB-24, set flash sync mode selector to NORMAL).

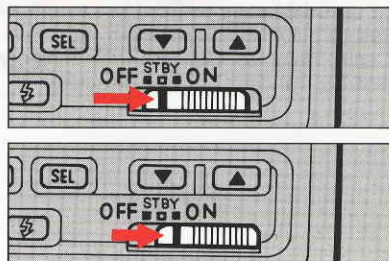

5. Turn the speedlight on. (With SB-24, TTL  mark appears in the LCD panel.)



6. Look inside the viewfinder and lightly press the shutter release button. (With SB-24, angle of coverage is automatically adjusted.)
- When ready-light comes on but ambient light is insufficient for autofocus operation, AF illuminator turns on to start autofocus operation.

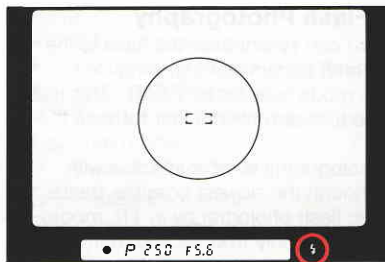

7. With the ready-light and in-focus indicator LCD on, as long as you have none of the following warning indications, you can shoot.

HI appears:	Overexposure alert.
F-- appears:	Non-CPU lens is used. Exposure mode is automatically set to A, and metering system to Center-Weighted.
FEE appears:	Lens is not set to minimum aperture. Shutter locks.

- If the ready-light blinks for a few seconds after shooting, move closer to the main subject or select a wider aperture by setting the camera to A or M exposure mode. For flash shooting distance range, see the speedlight instruction manual.

Rear-curtain Sync Flash Photography


When using the SB-24, you can synchronize the flash to the instant when the rear (second) curtain starts moving. Set the SB-24's flash sync mode selector to "REAR". This lets you turn available light into a stream of light that **follows** the flash illuminated subject.

Rear-curtain sync flash photography is most effective with slower shutter speeds. Although the slowest possible shutter speed for front-curtain sync flash photography in TTL mode, with camera at PD, P, PH or A, is only 1/60 second, with rear-curtain sync flash photography, you can slow the shutter down to 30 seconds, depending on background.

Ready-Light Warnings

When using Nikon dedicated speedlights, the N8008's viewfinder ready-light LED lights up when the flash is recycled. The following ready-light indications are used for warnings:

Before shooting: ⚡ disappears ⚡ blinks	Recharging Poor connection between camera and speedlight. (Keep speedlight and camera electrical connections clean.)
After shot: ⚡ blinks	Light may be insufficient for correct exposure; confirm shooting distance range.

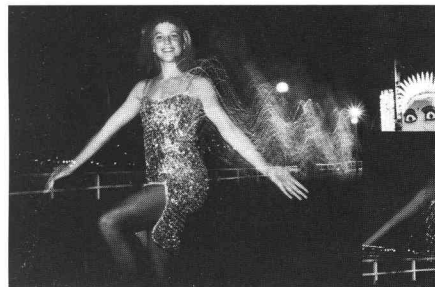


Rear-curtain sync



Front-curtain sync

VIEWFINDER INFORMATION

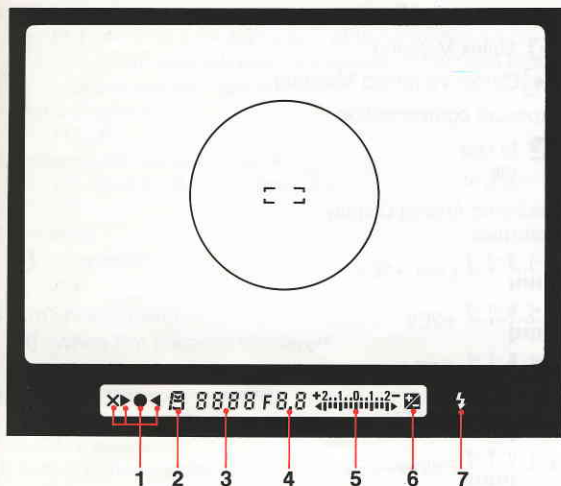

1 Focus

- ✕ Focus-not-possible alert
- ▶ Focus-to-right arrow — for too distant subject
- In-focus indicator
- ◀ Focus-to-left arrow — for too near subject

2 Exposure mode

- P Dual Program/Normal Program/High-speed Program
- S Shutter-Priority Auto
- A Aperture-Priority Auto
- M Manual

3 Shutter speed/film speed

Same as LCD panel.

4 Aperture/exposure compensation value

Same as LCD panel.

5 Electronic Analog Display


Same as LCD panel.

6 Exposure compensation mark

Same as LCD panel.

7 Ready-light LED

LCD INFORMATION

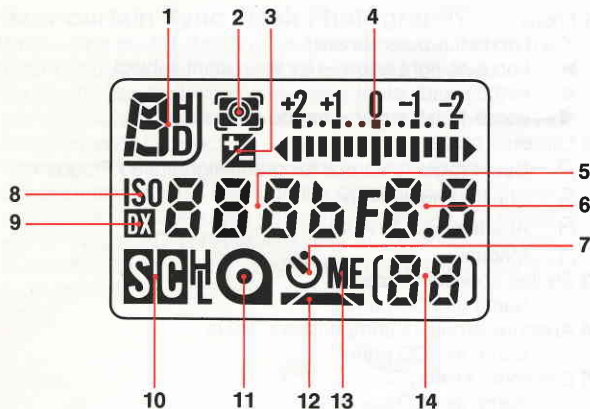

1 Exposure mode

- P** Dual Program
- S** Shutter-Priority Auto
- A** Aperture-Priority Auto
- M** Manual
- PH** High-speed Program
- P** Normal Program

2 Exposure metering system

- Matrix Metering
- Center-Weighted Metering

3 Exposure compensation

- In use
- Off

4 Electronic Analog Display

Examples:

Over +2EV

+2EV

±0EV

-2/3EV

Below -2EV

5 Shutter speeds

buLb-30"-15"-8"-4"-2"-1"-2-4-8-15-30-60-125-250-500-1000-2000-4000-8000

Alert indications

HI, Lo, Err

Film speeds

DX-6-8-10-12-16-20-25-32-40-50-64-80-100-125-160-200-250-320-400-500-640-800-1000-1250-1600-2000-2500-3200-4000-5000-6400

www.butkus.us

6 Aperture settings

F1-F1.4-F2-F2.8-F4-F5.6-F8-F11-F16-F22-F32-F45-F64

* An intermediate figure may appear in the case of a lens' maximum aperture value.

Alert indications

FEE, F--, HI, Lo

Exposure compensation values

0.0-0.3-0.7-1.0-1.3-1.7-2.0-2.3-2.7-3.0-3.3-3.7-4.0-4.3-4.7-5.0

7 Self-timer



In operation

— Off

8 Film speed setting

ISO When film speed is displayed

— Not displayed

9 DX-coded film speed setting



DX position selected

— Not selected

10 Film advance mode



Single



Continuous Low



Continuous High

11 Film installation



Installed

— Not installed

12 Film advance and rewind



Correctly loaded



Loading now



Rewinding

13 Multiple exposure



In operation

— Off

14 Frame counter

[E]-[0]-[1]-[2]-[3]-[4]-.....-[24]-.....-[36]-.....-[72]-.....-[99]

Self-timer duration

2-3-4-.....-28-29-30-2F

Number of multiple exposures

2-3-4-.....-8-9

LENSES

Nikon N8008 is designed for autofocus photography with AF Nikkor lenses. However, most other Nikon lenses can be used for standard photography according to the conditions listed in the following chart.

Lens Compatibility Chart

	Focusing		Exposure mode				Metering system	
	Autofocus	Manual w/electronic range finder	Programmed Auto	Shutter-Priority Auto	Aperture-Priority Auto	Manual	Matrix Metering	Center-Weighted
AF Nikkor lenses	○	○	○	○	○	○	○	○
AI-P type Nikkor lenses	1△	1△	○	○	○	○	○	○
AI-type Nikkor lenses (including AI-S)	1△	2△	×	×	○	○	×	○
AI-modified Nikkor lenses	×	2△	×	×	○	○	×	○
Medical-Nikkor 120mm f/4	×	○	×	×	5×	5△	×	○
Reflex Nikkor lenses	×	×	×	×	6○	6○	×	○
PC-Nikkor lenses	×	×	×	×	7△	7△	×	○
Teleconverters TC-16A	1○	3△	×	×	8△	8△	×	○
Teleconverters (except TC-16A)	×	4△	×	×	8△	8△	×	○
Bellows Focusing Attachment PB-6	×	×	×	×	9△	9△	×	○
Auto Extension Rings	×	4△	×	×	○	○	×	○

○ Compatible

△ Compatible as per conditions

×

www.butkus.us

ACCESSORY COMPATIBILITY

- 1 With maximum effective aperture of f/5.6 or faster when using TC-16A Autofocus Converter.
- 2 With maximum aperture of f/5.6 or faster. (Unless PC-Nikkor lenses are **shifted**.)
- 3 Manual focusing not possible.
- 4 With maximum effective aperture of f/5.6 or faster.
- 5 With shutter speed set to 1/125 sec. or slower. Flash necessary.
- 6 Aperture cannot be selected.
- 7 Exposure determined by presetting lens aperture. Exposure must also be determined before **shifting**; in A mode, use AE Lock lever before shifting.
- 8 If maximum aperture of master lens is faster than aperture selected, exposure compensation is necessary. See instruction manual.
- 9 Shutter should be released after exposure is measured by stopping down PB-6.

The following accessories cannot be used with the Nikon N8008.

- * Close-up Attachments PK-1 — 3, PN-1, K-2, BR-2
- * Body Cap BF-1
- * Eyepiece Accessories for F3HP/F3T

- PK-1, PK-11, BR-4 and K-1 Rings cannot be mounted directly on AF Nikkor lenses.
- Filters with a large exposure factor may affect the camera's Matrix Metering. Use Center-Weighted Metering.
- Polarizing filters cannot be used for autofocus or auto exposure; use circular polarizing filter only.
- Special filters, such as soft focus filters, cannot be used for autofocus or for manual focus with electronic range finder.

INTERCHANGEABLE FOCUSING SCREENS


In addition to the advanced B-type BriteView screen supplied with the N8008, two other interchangeable optional screens are available to match your subject.

Type E: Clear Matte/Fresnel with focusing brackets and grid.


Suited for copying and architectural photography.

Type J: Clear Matte/Fresnel with microprism.

Be sure not to touch the focusing screen or reflex mirror with your fingers.

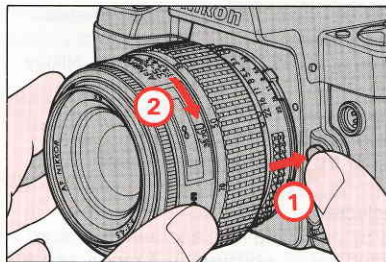


1. Remove the lens.

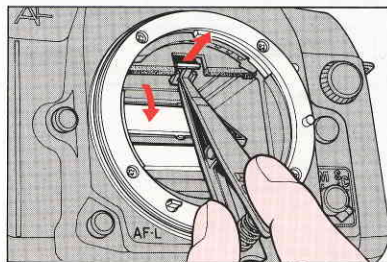


2. Slip the tip of the special tweezers (provided with optional screens) under the focusing screen release latch and pull outward to spring open the holder.


www.butku.com

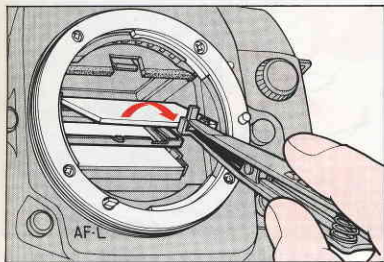

3. Remove the screen by grasping the small tab with the tweezers.

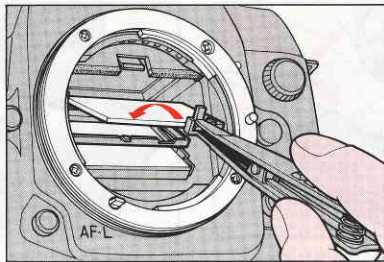


4. Carefully position the replacement screen in place, making sure the flash side is facing down.

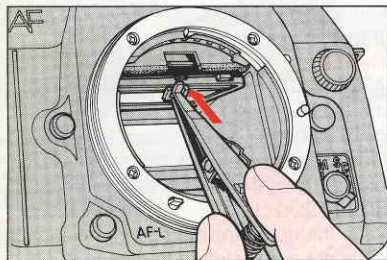


5. Using the tweezers, push the front edge of the holder upward until it clicks into place. An improperly placed focusing screen causes unreliable focus information in the viewfinder.


CAMERA CARE TIPS

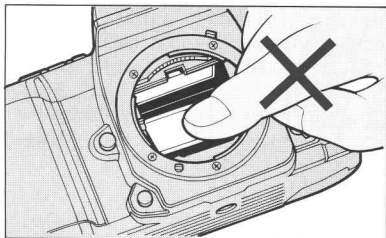


1. Never touch the reflex mirror or focusing screen. Remove dust with a blower brush.

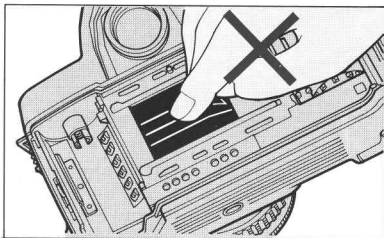


2. Never touch the shutter curtains.

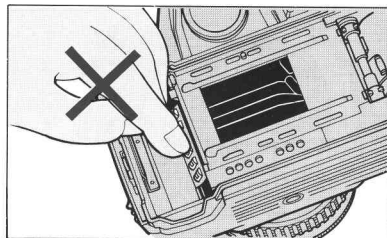

3. Never touch the DX contacts. Keep clean with blower brush.

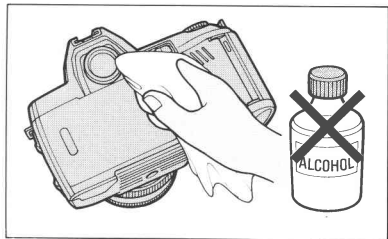

7. Clean the viewfinder eyepiece with a soft, clean cloth. Do not use alcohol.

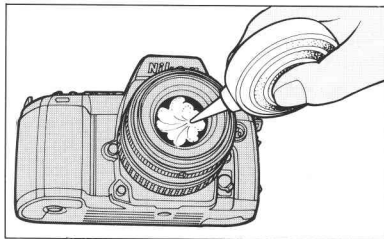


8. Clean glass surfaces such as the lens with a blower brush; avoid using lens tissue as much as possible. To remove dirt and smudges, use soft cotton moistened with pure

alcohol and wipe in a spiral motion from center to periphery. Be careful not to leave traces.

Caution


A spray gun-type blower may damage the glass if used to clean the lens, especially when ED glass is used for the front lens element. To avoid damage, hold the blower upright with its nozzle more than 30cm (12 in.) from the lens surface and keep the nozzle moving so the stream of air is not concentrated in one spot.

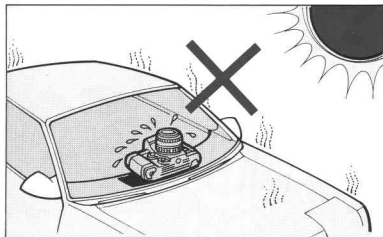


4. Do not leave the camera in an excessively hot place.




5. Keep the camera away from water or excessive moisture. When using the camera near water, guard against splashes, especially salt water spray.

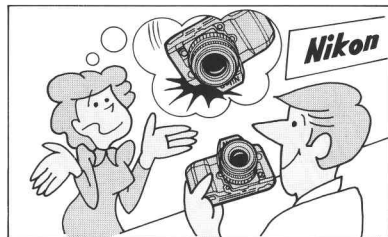


6. If the camera malfunctions, take it immediately to an authorized Nikon dealer or service center.

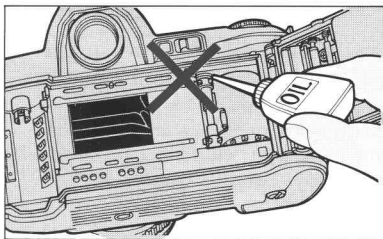

9. Do not lubricate the camera.

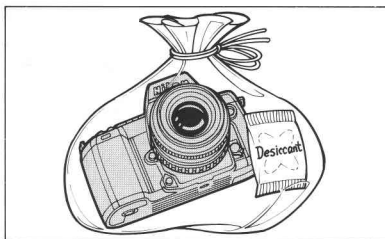


10. Store the camera in a cool, dry place away from naphthalene or camphor (moth repellents). In a humid environment, store the camera inside a vinyl bag with a desiccant to keep out dust, moisture and salt.

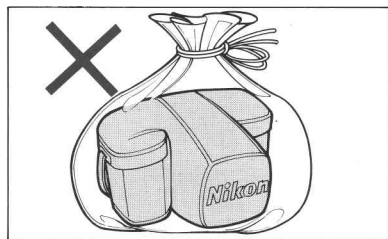


Note, however, that storing the leather case in a vinyl bag may cause the leather to deteriorate.


NOTES ON BATTERIES

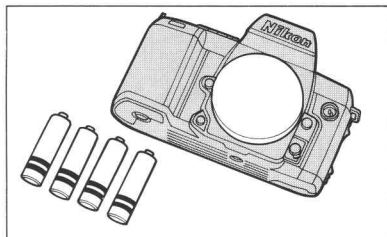


1. When not using the camera for a long period, remove batteries.

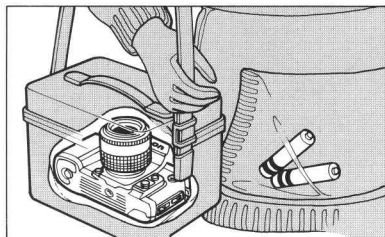


2. Battery power falls off in extremely cold temperatures — make sure batteries are new and keep the camera body wrapped in something warm.

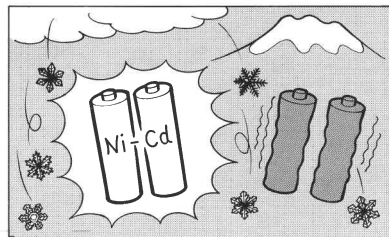


3. For better performance in cold temperatures, use Ni-Cd batteries.

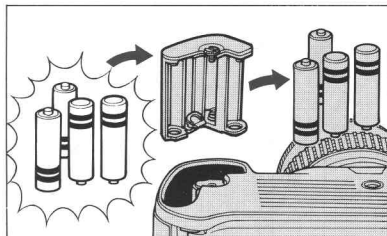

4. When replacing batteries, be sure to replace all batteries at the same time. Always use fresh batteries of the same brand.

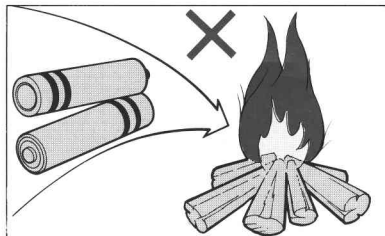

5. Do not throw used batteries into a fire.

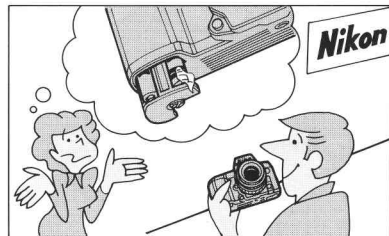

6. If the battery chamber is contaminated by battery leakage, take the camera to an authorized Nikon dealer.

www.butkus.us

SPECIFICATIONS

Type of camera	Integral-motor autofocus 35mm single-lens reflex	Metering range	EV 0 to EV 21 at ISO 100 with f/1.4 lens
Picture format	24mm x 36mm (standard 35mm film format)	Exposure modes	Programmed auto (PD, P, PH), shutter-priority auto (S), aperture-priority auto (A) and manual (M) modes
Lens mount	Nikon F mount	Programmed auto exposure control	Both shutter speed and aperture are set automatically; flexible program in one EV step possible
Lens	AF Nikkor lenses, and Nikon lenses with Nikon F mount (with limitation) available	Shutter-priority auto exposure control	Aperture automatically selected to match manually set shutter speed
Focus modes	Autofocus, and manual focus with electronic range finder	Aperture-priority auto exposure control	Shutter speed automatically selected to match manually set aperture
Autofocus		Manual exposure control	Both aperture and shutter speed are set manually
Autofocus detection system	TTL phase detection system using Nikon advanced AM200 autofocus module	Shutter	Electromagnetically controlled vertical-travel focal-plane shutter
Autofocus detection range	Approx. EV minus 1 to EV 19 (at ISO 100)	Shutter release	Electromagnetic shutter by motor trigger
Autofocus actuation method	Single servo and continuous servo	Shutter speeds	Lithium niobate oscillator-controlled speeds from 1/8000 to 30 sec.; stepless in PD, P, PH or A mode; one EV steps in S or M mode; electromagnetically controlled long exposure at B setting
Autofocus lock	Possible by lightly pressing shutter release button in Single Servo AF mode or by using AF Lock button	Viewfinder	Fixed eyelevel pentaprism high-eyepoint type; 0.75X magnification with 50mm lens set at infinity; 92% frame coverage
Electronic range finder	Available in manual focus mode with an AF Nikkor and other AI-type Nikkor lenses with a maximum aperture of f/5.6 or faster	Eyepoint	Approx. 19mm
Exposure metering	Two types of exposure metering systems — Matrix Metering and Center-Weighted	Eyepiece cover	Model DK-8 prevents stray light from entering viewfinder
Exposure meter switch	Activated by lightly pressing shutter release button; stays on for approx. 8 sec. after lifting finger from button		

Focusing screen

Nikon advanced B-type BriteView screen with central focus brackets for autofocus operation

Viewfinder information

The following LCD indications appear: focus indicators, exposure modes, shutter speeds/film speeds, aperture/exposure compensation value, electronic analog display, exposure compensation mark; ready-light LED; viewfinder display is illuminated automatically or by pressing the viewfinder illumination button

LCD information

The following indications appear: exposure modes, metering types, exposure compensation, electronic analog display, shutter speeds/film speeds, aperture/exposure compensation value, film speed setting, DX-coded film speed setting, film advance mode, film installation, film advance and rewind, self-timer, multiple exposure, frame counter/self-timer duration/number of multiple exposure

Electronic beeper

With power switch at **■**), beeper sounds in the following cases:

operation signals; (1) at end of film roll; (2) when film rewinding is complete; (3) during self-timer operation;

alert signals; (1) for over- or underexposure and possible

picture blur in PD, P, PH or A mode; (2) when lens is not set to the smallest aperture setting in PD, P, PH or S mode; (3) when non-DX-coded film, damaged film or film with an unacceptable DX-code is loaded; (4) such as torn or damaged film during film advance

Auto exposure lock

Available via sliding the AE Lock lever while the meter is on

Film speed range

ISO 25 to 5000 for DX-coded film; ISO 6 to 6400 for manual setting

Film speed setting

At DX position, automatically set to ISO speed of DX-coded film used; with non-DX-coded film, ISO speed is set manually

Film loading

Film automatically advances to first frame when shutter release button is depressed once

Film advance

In S (Single-frame) shooting mode, film automatically advances one frame when shutter is released; in CH (Continuous High) or CL (Continuous Low) shooting mode, shots are taken as long as shutter release button is depressed; in CH mode, shooting speed is approx. 3.3fps, and in CL, approx. 2.0fps (in Continuous Servo Autofocus or manual focus mode, with new batteries at normal temperatures, and a shutter

Frame counter	speed faster than 1/125 sec.) Accumulative type; counts back while film is rewinding
Film rewind	Automatically rewinds by pressing film rewind button and multiple exposure/film rewind button; approx. 10 sec. per 24-exposure roll; stops automatically when film is rewound
Self-timer	Electronically controlled; timer duration can be selected between 2 to 30 sec. in one sec. increments; blinking LED indicates self-timer operation; two-shot self-timer is possible; cancellable
Exposure compensation	Possible using exposure compensation button within ± 5 EV range in 1/3 EV steps
Multiple exposure	Up to 9 exposures can be set
Depth-of-field preview button	Provides visual verification of depth of field; can be previewed in A or M mode
Reflex mirror	Automatic, instant-return type
Camera back	Hinged back; exchangeable with Nikon Multi-Control Back MF-21 or Data Back MF-20
Accessory shoe	Standard ISO-type hot-shoe contact; ready-light contact, TTL flash contact, monitor contact
Flash synchronization	1/60 to 1/125 sec. in PD, P, PH or A mode; in S or M mode, shutter fires at speed set, and when set from

Flash ready-light
Viewfinder LED lights up when Nikon dedicated speedlight is ready to fire; blinks to warn of poor camera/speedlight connection or insufficient light for correct exposure

Autofocus
flash photography
Possible with Nikon Autofocus Speedlights SB-24, SB-23, SB-22 or SB-20

Power source
Four AA-type batteries

Number of 36-(24-)exposure film rolls per set of fresh batteries (approx.)*

For Continuous Servo Autofocus with AF Nikkor lens covering the full range from infinity (∞) to the closest distance and back to infinity (∞) before each shot

Batteries	At 68°F	At 14°F
Alkaline-manganese (LR06)	120 (180)	20 (30)
Manganese	40 (60)	5 (7)
NiCd (KR-AA)	80 (120)	25 (35)

* Using AF Nikkor 50mm f/1.8 or AF Nikkor 35–70mm f/3.3–4.5, with film advance mode at CH and a shutter speed of 1/125 sec. or faster.

**Checking
battery power**

Battery power is sufficient if shutter speed and aperture indications appear in the LCD panel and viewfinder by lightly pressing shutter release button, and remain on for approx. 8 sec. after finger is removed from the button; insufficient if these indications turn off immediately after finger is removed from the button; if LCD blinks and shutter locks, batteries are exhausted; if no data appears and shutter does not operate, batteries are exhausted or improperly loaded

Dimensions (W x H x D) 6.0 x 4.0 x 2.6 in.

(153.6 x 102.5 x 67.5mm)

Weight (body only) Approx. 24.5 oz. (695g)

With fresh alkaline batteries at normal temperature (68°F).
Specifications and designs are subject to change without notice.

For multiple flash photography using Nikon Speedlights, if the electric current in the synchro circuit exceeds a certain level, you may not be able to take a second shot after taking the first shot. Take care that the combined total of the coefficients (numbers shown in parenthesis below) for all of the speedlight's used at any one time does not exceed 20 at 68°F (13 at 104°F).

SB-24 (1) SB-23 (4) SB-22 (6) SB-21 (4) SB-20 (9)
SB-19 (2) SB-18 (16) SB-17 (4) SB-16 (4) SB-15 (4)
SB-14 (1) SB-12 (1) SB-11 (1)

If you are unable to take a second shot, disconnect master speedlight from the N8008, or turn each of the speedlights off and on once.

In certain cases, due to static electricity or poorly loaded batteries, the N8008's microcomputer may turn the camera off, even with fresh, properly installed batteries. For the same reason, film may not advance properly, or the film loading indication may start blinking before you come to the end of the film. In each of these cases, to resume operation, simply slide the power switch to OFF and turn on again, or remove batteries and install again.

Your Nikon camera requires precise electronic and mechanical matching between component products such as lenses and electronic flash. Nikon brand lenses and electronic flash units are made to Nikon's factory specifications and will operate properly and in accordance with the Nikon Limited Warranty provided. Damage to your Nikon product, as a result of malfunction or improper connections, caused by the use of non-Nikon brand products, **is not covered under the terms of the Nikon Limited Warranty and will void the Nikon warranty.**

Nikon cannot be held responsible for malfunction resulting from the use of the camera other than as specified in this manual.