

Features

- ▶ DC Expert™ battery management system
 - +/- 3% Battery Run Time
 - Battery health indication
- ▶ Powerware Hot Sync® Redundant capability
- ▶ Large display panel provides metering, statistics, alarm history and an active mimic screen
- ▶ Prioritized cooling of components
- ▶ Flexible communication capability
 - ▶ Local communication
 - Monitor panel
 - Illuminated indicators
 - Control panel
 - ▶ Remote communications
 - Relay interface contacts
 - Building alarm contacts (programmable)
 - Summary alarm contacts
 - RS232 port (standard)
 - EPO kit
 - Remote monitor panel
- ▶ Communications options
 - ▶ Optional communication cards
 - ConnectUPS-X SNMP/Web card
 - Multi-server card (5-RS232 serial port output)
 - Single port serial card
 - Expansion chassis (Modbus Card Standard plus 2 open slots)
- ▶ Intelligent input filter option
- ▶ Prioritized cooling

Powerware® 9315-50



Model 30 30kVA/24kW

Model 40 40kVA/32kW

Model 50 50kVA/40kW

Environmental Specifications

Ambient temperature	0°C to +40°C
Storage	20°C to +70°C
Relative humidity	0-95% non-condensing
Altitude	1500 meters (5000ft.) at 40°C ambient temperature without load derating
Audible noise	Less than 65 dBA at 1 meter; in accordance with ISO 7779
Electrostatic discharge	Withstands 25kV without damage or disturbance to the load; exceeds requirements of IEC 801-2
EMC	Meets FCC Class A and EN 50091-2 (CISPR 22, Class A)

Input Specifications

Voltage range	(See chart on other side)
Frequency range	(60 Hz) 57-63 Hz; (50 Hz) 47-53 Hz
Surge protection	Meets IEEE 587, C62.41, Category A & B, EN 50091-2 and EN 50082-2
Power factor	0.95 typical at full load with input filter Input current distortion less than 7% with input filter

Output Specifications

Voltage THD	Less than 3% for 100% linear load. Less than 5% for 100% non-linear load when tested in accordance with EN50091-3
Voltage regulation	Better than ±1%
Transient response	Less than 5% for 100% load step; full recovery within 1 cycle
Frequency	(free run) ±0.005 Hz
Frequency sync range	±0.5 Hz
Frequency slew rate	1 Hz/second maximum
Voltage adjustment range (operator)	±5%

Battery Specifications

Matching cabinets	Line-up or remote
Battery type	Sealed, valve-regulated lead acid
Recharge time:	10-12 times the discharge time to 95%
Other battery options	Wet cell and nickel-cadmium batteries; open racks available

For battery run times and configurations, refer to Bulletin BAT01FXA.

Safety

UL1778 Listed
cUL CAN/CSA C22.2 NO.107.1 Listed
EN 50091-1
All cabinets provide seismic mounting features
Selectable DC ground fault detection capability

Specifications subject to change without notice.

Powerware 9315-50 Performance Characteristics

		Model 30					Model 40					Model 50				
		30kVA/24kW					40kVA/32kW					50kVA/40kW				
Input Voltage	Volts	480	480	208	220	600	480	480	208	220	600	480	480	208	220	600
Output Voltage	Volts	208	480	208	208	208	208	480	208	208	208	208	480	208	208	208
Input Voltage Range																
Minimum	Volts	408	408	177	187	510	408	408	177	187	510	408	408	177	187	510
Maximum	Volts	528	528	229	242	660	528	528	229	242	660	528	528	229	242	660
Input / Output Frequency	Hz	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60
AC Input (With input filter)																
Nominal Amps	Amps	34	34	77	73	27	45	45	102	97	35	55	55	128	118	44
Maximum Amps	Amps	42	42	96	91	33	56	56	128	120	44	69	69	160	147	55
AC Input (Without input filter)																
Nominal Amps	Amps	39	39	90	86	32	52	52	121	114	42	66	66	150	140	52
Maximum Amps	Amps	49	49	113	107	39	65	65	151	143	52	82	82	188	175	65
Bypass Input																
Nominal Amps	Amps	36	36	83	79	29	48	48	111	105	38	60	60	139	131	48
AC Output																
Nominal Amps	Amps	83	36	83	83	83	111	48	111	111	111	139	60	139	139	139
10 Minutes Max.	Amps	104	45	104	104	104	139	60	139	139	139	174	75	174	174	174
DC Link																
Nominal DC Voltage	Volts	480	480	480	480	480	480	480	480	480	480	480	480	480	480	480
Float Voltage	Volts	540	540	540	540	540	540	540	540	540	540	540	540	540	540	540
End of Discharge	Volts	401	401	401	401	401	401	401	401	401	401	401	401	401	401	401
Maximum Amps	Amps	60	60	60	60	60	80	80	80	80	80	100	100	100	100	100
Physical Attributes (w/o batt.)																
Installed Weight	Lbs	1750	1750	2075	2075	2075	1750	1750	2075	2075	2075	1750	1750	2075	2075	2075
Installed Width	Inches	34	34	34	34	34	34	34	34	34	34	34	34	34	34	34
System Efficiencies (Typical)																
@ 100% Load	%	91	91	89	89	89	92	92	90	89	90	92	92	90	90	91
@ 75% Load	%	89	89	87	87	87	91	91	89	88	89	92	92	90	90	90
@ 50% Load	%	87	87	84	84	84	89	89	88	87	88	91	91	89	89	89
Full Load Heat Dissipation																
BTU/Hr. (x1000)		8.1	8.1	10.1	10.1	10.1	9.5	9.5	12.14	13.5	12.14	11.88	11.88	15.18	15.18	13.5
KCal/Hr. (x1000)		2.04	2.04	2.55	2.55	2.55	2.39	2.39	3.06	3.4	3.06	2.99	2.99	3.81	3.81	3.40
Inverter Efficiency (Full Load)		94	94	94	94	94	94	94	94	94	94	94	94	94	94	94


Maximum Amps equals full load current plus battery recharge current • End of Discharge based on 1.67 v/cell. Maximum Amps based on 1.8 v/cell.



Casters are standard for ease of installation.

Specifications subject to change without notice.

Physical Dimensions and Weights

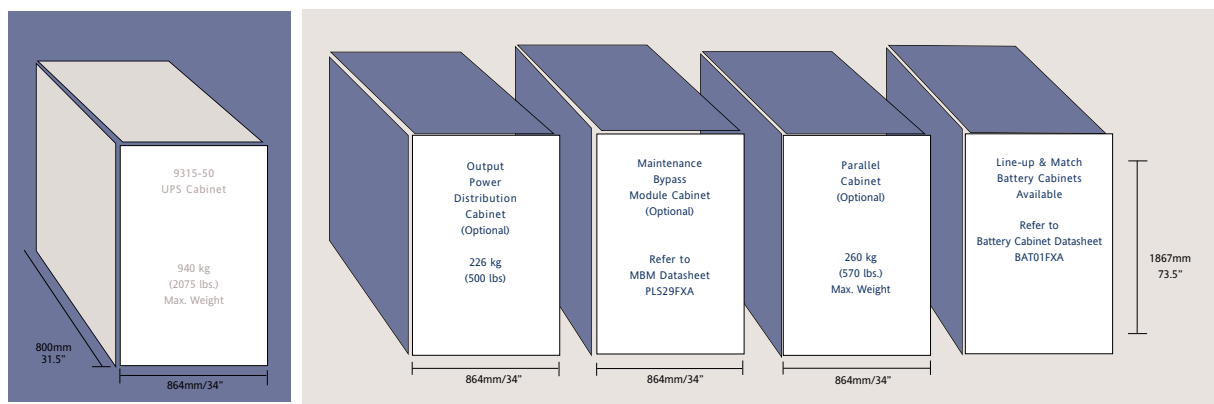

Shipping pallet and packaging adds 50 to 300 lbs. per shipping unit. • All accessories feature plug and play capability. All previously mentioned corporate names and brands are registered as trademarks by their respective companies.

Invensys Powerware Division

8609 Six Forks Road
Raleigh, NC 27615 U.S.A.
Toll Free: 1.800.356.5794
or 919.872.3020
Fax: 1.800.753.9433
www.powerware.com

PLS06FXA
Reprinted 08/02
Revised 08/02

Europe
Finland: 358 94 52 661
France: 33 1 6012 7400
Germany: 49 7841 6660
Italy: 39 02 6600661 2
UK: 44 (0) 1753 608700

Southeast Asia
Singapore: 65 6861 0377

China and North Asia
Hong Kong: 852 2745 6682

Japan
Shinagawa, Tokyo: 81 3 3447 4441

Australia and South Pacific
Sydney, Australia: 61 29878 5000

Canada
Toronto, Ontario: 416.798.0112

Brazil
Sao Paulo, Brazil: 55 11 3845
4369/ 55 11 3704 3632

Mexico
Col. Napoles, Mexico:
525.488.3333

