


AOM711 to AOM713

Swap out instructions

Remove the **AOM711** monitor panel from the existing system. The existing wire harness and main camera cable will remain.

*NOTE: If noise is experienced with the new monitor, replacement of the existing wire harness and use of the new wire harness will be required.

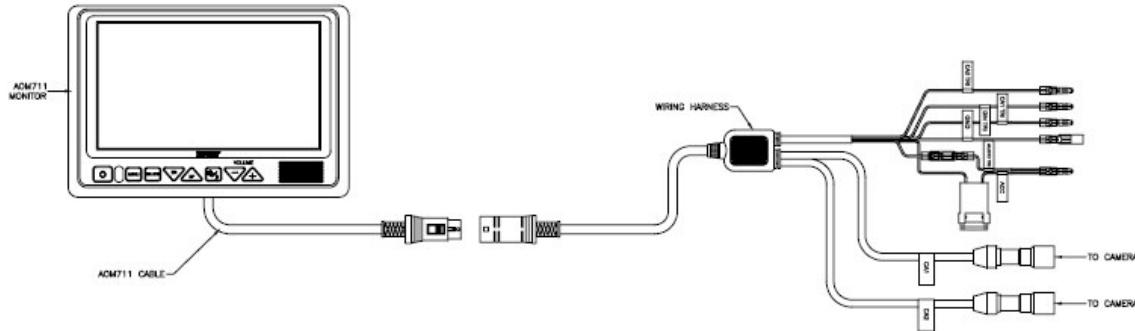

Install the **AOM713** monitor panel to existing mount and connect to existing harness connection.

