


Crystal Filter

Nominal Frequency f_o :	9.0000 MHz
Pole:	T.B.D.
Pass Bandwidth @ 3dB:	250 Hz, 500 Hz, 600 Hz, 1 kHz (± 125 , ± 250 , ± 300 and ± 500 Hz)
Stopband Attenuation:	To Be Defined by the customer
Insertion Loss:	will be defined by QuartzCom
Terminating impedance:	will be defined by QuartzCom
Drive Level:	will be defined by QuartzCom
Operating temperature range:	To Be Defined by the customer
Package:	will be defined by QuartzCom

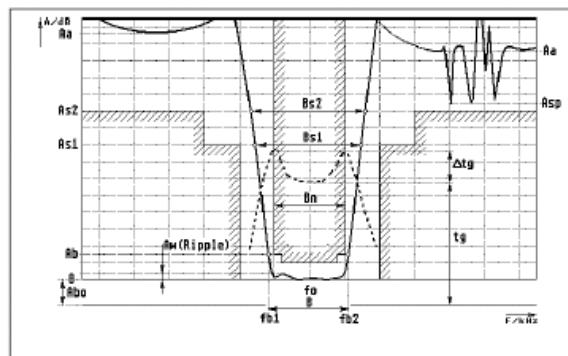

f_o	Nominal frequency	indicates the nominal center frequency of the band-pass or the nominal stop frequency of a band-stop filter.
f_c	Centre frequency	The really centre frequency of the band-pass: $f_c = \sqrt{f_{b1} \cdot f_{b2}}$, approximately: $f_c = \frac{f_{b1} + f_{b2}}{2}$
A_{bo}	Insertion loss	The logarithmic ratio of the power delivered to the load impedance before insertion of the filter to the power delivered to the load impedance after insertion of the filter.
B_n	Nominal bandwidth	Minimal bandwidth of the pass-band at the attenuation A_b
B	Bandwidth	Really bandwidth at the attenuation A_b : $B = f_{b2} - f_{b1}$ Note: Often the bandwidth is given as $B = \pm B/2$
B_s	Stop-bandwidth	Really bandwidth at the attenuation A_s
A_b	Attenuation at B	Attenuation at bandwidth referred to insertion loss
A_w	Ripple	The difference between the maximum and minimum attenuation within the pass-band (B) unless otherwise specified.
A_s	Stop-band attenuation	Attenuation at bandwidth B_s referred to insertion loss
A_a	Alternate attenuation	Attenuation in a frequency range far outside of the pass band
A_{sp}	Spurious response	Minimum attenuation caused by extraordinary response in the stop-band. Spurious response usually appears at higher frequency than the center frequency.
t_g	Group delay	Absolutely group delay
$t_{\Delta g}$	Group delay distortion	The difference between the maximum and minimum group delay within the pass-band (B) unless otherwise specified.

Terms and Definitions