


BROADCAST

AN INSTANT PUBLICATION

September 1991/\$4.50

ENGINEERING

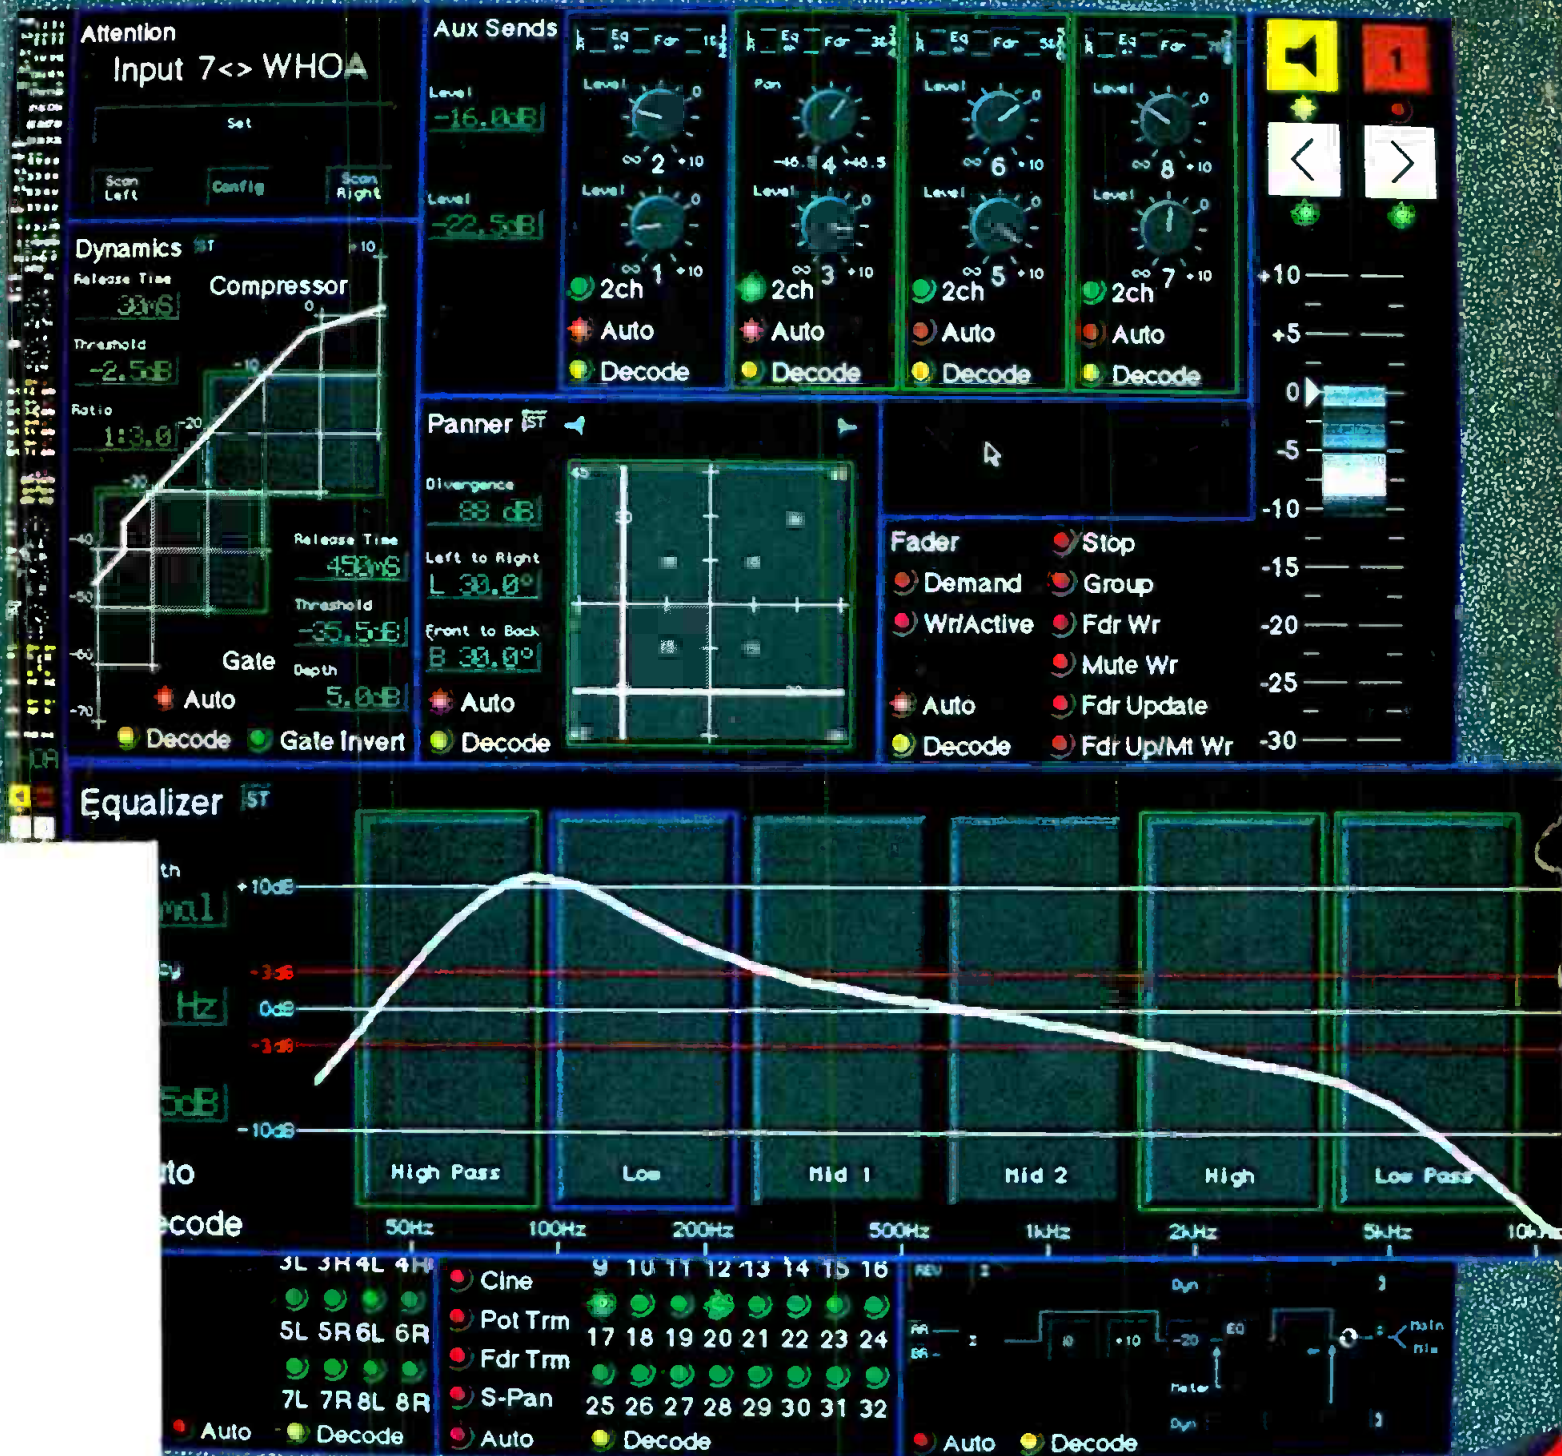

Audio-video
control systems

SBE Show Preview
p. 92

Looking
100 MHz ahead...



SYSTEM 5

100 MHz BANDWIDTH ROUTING SWITCHER

SYSTEM 5 takes the guesswork out of selecting a routing switcher ...for any size facility. Its ultra wide 100MHz video bandwidth gives you the confidence required to plan for future signal formats and is essential today for RGB graphics, HDTV and component video.

And SYSTEM 5's sixteen levels, virtual matrix mapping, and "honest" expansion capability to 1024 x 1024 eliminate your anxieties when buying today for tomorrow's challenges.

Its packaging density offers the most crosspoints per rack unit. For routine maintenance, standard multiple sourced components protect you from unnecessary delays and costs.

SYSTEM 5's controller uses proven designs, is built to exacting specifications with total redundancy for high reliability. It is most flexible ...on-line matrix reconfiguration and diagnostics, RS232/422 ports, internal audio summing and stereo channel reversal, reverse audio path management and a wide range of 8-character down-loadable control panels give you complete command. *(It can be retrofitted to over 1000 of our installed Series II and 40x matrices).*

When it comes to predicting future industry changes, our crystal ball isn't any better than yours, but you can rely on our experience gained from thousands of operating systems...from simple 15x1s to an Olympic communications complex.

Take the guesswork out of your planning. Call now for details and a demo disc for your PC.

Pesa America Inc., 2102 West Ferry Way, Huntsville, AL 35801
205-880-0795 FAX 205-881-4828
West: Burbank, CA 800-323-7372 East: New York City 800-328-1008

See us at SMPTE
Booth 1946

A SWITCH INTO THE FUTURE



PESA



Circle (1) on Reply Card

www.americanradiohistory.com



**COME SEE US AT
BOOTH #225
SEE OUR FIBER OPTIC VIDEO
WORKSHOP AT THE
SBE SHOW
IN HOUSTON**


For Putting Video On Fiber, The Choice Is Clear.

For point-to-point, STL or multipoint distance learning and video conferencing applications, fiber is a clear choice. So is the company that can help you put that video signal over fiber...ADC Telecommunications.



FN 6000

- full presence multipoint, distance learning/video conferencing
- drop and insert capability
- up to 16 channels/50 miles

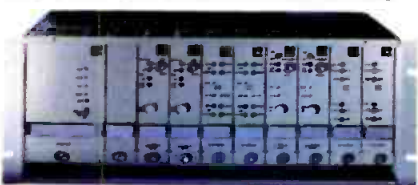

LC SERIES

- point-to-point, STL, RS-250C shorthaul
- up to four audio channels
- up to 15 miles

ADC can help you configure the rest of your system with copper and fiber cable management and switching products for a total systems solution. For more information, call 1 800 726-4266 or send in the coupon for a free brochure.

I'd like to know more about how ADC can help me put video over fiber.

Name

Title Phone

Company

Address

City State Zip

Mail or Fax To:
ADC Telecommunications, Inc.
Mail Station 72
4900 West 78th Street
Minneapolis, Minnesota 55435
FAX (612) 893-3050



ADC Telecommunications

"Where Quality Runs Full Circuit."

Contents

September 1991 • Volume 33 • Number 9

BROADCAST engineering



Page 26



Page 50



Page 94

AUDIO-VIDEO CONTROL SYSTEMS:

Modern control and production rooms are complex. With automation, digital and higher-quality signals widely available, technology managers are provided with opportunity and challenge. Those who learn to take advantage of these new evolving ideas will help lead their stations and production facilities toward a profitable future.

DEPARTMENTS

- 4 News
- 6 Editorial
- 8 FCC Update
- 10 Strictly TV
- 12 re: Radio
- 14 SBE Update
- 16 Circuits
- 18 Troubleshooting
- 20 Management for Engineers
- 96 Applied Technology: Affordable digital audio processing
- 102 New products
- 108 Preview

ON THE COVER

Illustrated on the cover is the screen display of a modern audio console, which uses digital technology to provide easy access to the system's configuration and operation. (Cover credit: Kim Bracken, BE graphic designer. Console screen display by Harrison/GLW.)

FEATURES:

26 Advantages of 3-Stage Switcher Design

By Marc S. Walker, *BTS Broadcast Television Systems*

A multistage approach can lower costs and increase reliability for large routing switchers.

46 Implementing Multifformat Routing Switchers

By Dan Mazur, *Di-Tech*

A "virtual matrix" is the key to switching in a multifformat world.

50 Fiber-Optic Routing Switchers

By Jack Guedj, *TriQuint Semiconductor*, and Bob Grant, *Integrated Switching Systems*

Must the advantages of fiber optics hit a bottleneck at the switcher?

66 Integrating Multiple Control Systems

By Rould Steen, *free-lance author*

Computers simplify system control in modern broadcast plants.

78 The On-Line/Off-Line Interface

By Bill Ferster, *Editing Machines Corporation*

The rapid growth of off-line editing systems is beginning to revolutionize the post-production industry.

86 Archiving for Productivity

By Rick Lehtinen, *technical editor*

New technologies make archiving productive and even profitable.

OTHER FEATURES:

92 SBE Show Preview

94 SMPTE Show Preview

ANOTHER BURLE POWER TUBE HAPPY BIRTHDAY!



A BURLE power tube at WNCT in Greenville, North Carolina recently passed a major milestone by celebrating its 90,000th operating hour. Quite an accomplishment, and we're proud of it.

BURLE power tubes go back to the beginnings of power tube technology—and we're continually working at our Lancaster, Pennsylvania facility to ensure optimum performance in each and every BURLE tube. It's no wonder there are

BURLE tubes still going strong after 70,000, 80,000 and—in the case of WNCT—even 90,000 hours. Frankly, it wouldn't surprise us if there's a BURLE power tube out there destined to break the 100,000-hour mark!

Of course, operating life is affected by tube usage and care (the folks at WNCT have *another* BURLE power tube that's recently passed the 68,000-hour mark, so they're obviously doing something right).

Considering our track record—if you're interested in having *your* next power tube live to a ripe old age, contact your BURLE Tube Distributor who can also serve your needs for broadcast quality BURLE camera tubes, or call us at 1-800-366-2875.

Experience counts.

BURLE Electron Tubes

BURLE Electron Tubes, 1000 New Holland Avenue, Lancaster, PA 17601-5688.

Circle (5) on Reply Card

www.americanradiohistory.com

By Dawn Hightower,
senior associate editor

Advanced TV testing begins

The official testing of advanced TV transmission systems vying to become the new high-definition TV broadcast standard started with the click of a computer key by Alfred C. Sikes, chairman of the Federal Communications Committee (FCC).

This activated the special test apparatus that has been under development for approximately three years.

The event marked the beginning of a planned year-long testing effort at the Advanced Television Test Center (ATTC). The goal is to help the FCC set the new standard by June 1993.

In a special arrangement between ATTC and Cable Television Laboratories, the cable industry will simultaneously be testing these ATV systems for cable use, using additional purpose-built equipment.

Six ATV systems proposed by a number of different organizations are scheduled for testing. The FCC Advisory Committee has certified each as warranting testing. One system (ACTV) is an enhanced-definition television (EDTV), which proposes to build on today's (NTSC) TV system. Five systems are simulcast HDTV, which propose to operate independent of today's services and on now-vacant TV channels. Of these five systems, all use digital signal processing. However, one would transmit TV signals in analog form (Narrow-MUSE), and four would do so in digital form.

The proponent of each ATV system must deliver and maintain a full TV transmission system — video and audio — operating in real time, with no simulations.

The laboratory testing of each ATV system will take approximately seven weeks, and will result in technical objective measurements about the performance of each system under controlled lab conditions.

Increased security for ENG operations

The FCC has amended its rules to permit the use of digital voice ("F3Y") emission for encrypting aural communications of remote pickup broadcast stations. This will enable licensees to prevent unauthorized interception and use by third parties of intrastation communications related to newsgathering and program production.

This change was prompted by the com-

mission's receipt of several applications for authorization to use F3Y emission in the Remote Pickup Broadcast Service. The applicants wanted to keep communications relating to news reporting confidential until the stories could be aired. Broadcasters maintained that although third-party reception and use of such radio signals was prohibited, the aggressive competition among news crews to be first with an exclusive news story sometimes made the extra level afforded by digital encryption technology necessary.

In a departure from the rulemaking notice, the commission will allow stations using F3Y emission to transmit unscrambled analog or international Morse Code station identification at intervals not exceeding 15 minutes during operation, preferably using the broadcast station's Part 73 call sign. This will enable any party receiving interference to easily identify the source.

October date set for Technical Conference

The Society of Motion Picture and Television Engineers (SMPTE) has scheduled its 133rd Technical Conference and Equipment Exhibit, Oct. 26-29 in the Los Angeles Convention Center, Los Angeles.

There will be technical programs, equipment exhibits, seminars, workshops and a student fair.

Congressman Ritter to speak at SBE Convention

The SBE banquet that will be held during the SBE Convention, Oct. 3-6, in Houston will feature U.S. Congressman Don Ritter. He is currently serving his seventh term in the U.S. House of Representatives, and represents Pennsylvania's 15th Congressional District.

He is only one of a handful of 435 members of the House with a technological background, and the only one at a doctoral level. Ritter earned his master's and doctor of science degrees from the Massachusetts Institute of Technology, and his bachelor of science degree from Lehigh University, Bethlehem, PA.

BROADCAST
engineering

EDITORIAL

Brad Dick, Editor
Carl Bantz, Special Projects Editor
Rick Lehtinen, Technical Editor
Skip Pizzi, Technical Editor
Dawn Hightower, Senior Associate Editor
Stelanie Kure, Associate Editor
Tom Cook, Senior Managing Editor
Pat Blanton, Directory Editor

ART

Kim Bracken, Graphic Designer

BUSINESS

Cameron Bishop, Group Vice President
Duane Hefner, Group Publisher
Tom Brick, Marketing Director
Evelyn Hornaday, Promotions Manager
Jon Newman, Promotions Coordinator
Dee Unger, Advertising Business Manager
Mary Birnbaum, Advertising Production Supervisor
Sally Nickoley, Advertising Coordinator

ADMINISTRATION

R.J. Hancock, President
Doug Wilding, Circulation Director
Customer Service: 913-541-6633

TECHNICAL CONSULTANTS

Eric Neil Angevine, Broadcast Acoustics
John H. Battison, Antennas/Radiation
Dennis Clapurs, Radio Technology
Dane E. Erickson, Systems Design
John Kean, Subcarrier Technology
Donald L. Markley, Transmission Facilities
Harry C. Martin, Legal
Elmer Smalling III, Cable/Satellite Systems

MEMBER ORGANIZATIONS

Sustaining Members of:
• Acoustical Society of America
• Society of Broadcast Engineers
• Society of Motion Picture and TV Engineers

Member,
Association of Business Publishers

Member,
Business Publications
Audit of Circulation

ABP
BPA

BROADCAST ENGINEERING is edited for corporate management, engineers/technicians and other station management personnel at commercial and educational radio and TV stations, teleproduction studios, recording studios, CATV and CCTV facilities and government agencies. Qualified persons include consulting engineers and dealer/distributors of broadcast equipment.

BROADCAST ENGINEERING is published monthly (except in the fall, when three issues are published) and mailed free to qualified persons within the United States and Canada in occupations described above. Second-class postage paid at Shawnee Mission, KS, and additional mailing offices. **POSTMASTER:** Send address changes to **Broadcast Engineering**, P.O. Box 12960, Overland Park, KS 66212.

SUBSCRIPTIONS: Non-qualified persons may subscribe at the following rates: United States and Canada; one year, \$50.00. Qualified and non-qualified persons in all other countries; one year, \$60.00 (surface mail); \$115.00 (air mail).

Photocopy rights: Permission to photocopy for internal or personal use is granted by Intertec Publishing Corporation for libraries and others registered with Copyright Clearance Center (CCC), provided the base fee of \$2.00 per copy of article is paid directly to CCC, 21 Congress St., Salem, MA 01970. Special requests should be addressed to Cameron Bishop, group vice president. ISSN 0007-1794 \$2.00 + \$0.00.

CORRESPONDENCE

Editorial and Advertising: P.O. Box 12901, Overland Park, KS 66212-9981. Telephone: 913-888-4664; telex: 42-4156 Intertec OLPK; fax: 913-541-6697. Circulation correspondence should be sent to the above address, under P.O. Box 12937.

©1991 by Intertec Publishing
All rights reserved.

Advertising offices listed on page 111.

INTERTEC
PUBLISHING CORPORATION

1-800-333-3333

INTRODUCING OUR S9x5.5 ENG/EFP LENS

The point of news coverage and field production is to be in close. Broad in scope. With no distortion. All while capturing shots as appealing as a wide slice of pepperoni pizza.

Nikon's new S9x5.5 lens, with internal focus, was made to order. Search far and wide and you'll find, for being near (about 1') and wide (77.3° x 61.9°), no one else gives more. The crisp image, sharp from corner to corner, comes courtesy of Nikon's famed optics and ED glass. You glide through the 9x zoom ratio – from 5.5mm to 49.5mm – smoothly. And we include a 1.7x extender.

The internal focus extends your creative options to include matte boxes and a full range of filters. And, like all Nikon ENG/EFP lenses, its lightweight design and rigid construction can't be topped.

The S9x5.5. Expect no less from Nikon. After all, we create the world's finest video lenses – from a complete line of HDTV lenses to converters that transform your Nikon F-series SLR lenses into a complete menu of special effects lenses for your CCD camera.

*For more information, write or call:
Nikon Electronic Imaging, Dept. D1,
101 Cleveland Ave., Bayshore, NY
11706, 1-800-52-NIKON
(526-4566).*

**AT 77.3° NO ONE
GIVES YOU A TASTIER
SLICE-OF-LIFE.**



Nikon
ELECTRONIC IMAGING

r e c r e a t i v i t y

© 1991 Nikon Inc.

Circle (6) on Reply Card

www.americanradiohistory.com

Never mind that the sky is falling

Sometimes we're our own worst enemy. I believe that's the case with many station general managers and owners. They mistakenly believe that if technical problems are ignored, or ones they aren't aware of, will simply go away. Nothing could be further from the truth. Technical problems that are ignored could be ones that end up costing you m-o-n-e-y.

This summer, I spent a lot of time traveling. Combined with business travel, vacation and my daily 70-mile commute, I spent a lot of time listening to my car radio. Recently, I was able to confirm to myself what readers have been saying for several years. The audio quality of many radio stations is seriously declining.

With modern car radios, it's easy to scan every available station. Armed with 15 or more station presets, a driver can quickly tune from one station to another. Because drivers are no longer encumbered by a linear tuning knob, selection of another station is as simple as pressing a button. This is a convenient feature for the listener, but can prove to be a problem for the radio station. The easy access to a number of stations makes it possible for your listeners to compare not only programming, but more importantly — signal quality between stations.

This summer, I was located in an area centered between two major markets. Each market had one station carrying the same satellite-delivered programming. Therefore, it was easy to compare the audio quality between the two stations. The difference was quite apparent.

The audible differences were not so much loudness as clarity and frequency response. On one station, the highs were brighter and compared favorably with CD reproduction. The other station's signal was louder and more compressed. However, the most obvious difference was the lack of high frequencies, even to the point of sounding dull.

Here were two stations carrying the identical programming, delivered from the same satellite. Yet, the quality of the transmitted signals was noticeably different.

For several weeks, I verified the quality difference of the stations. I then compared the lesser-quality station's signal to other competitors. The result was the same. The muddy-sounding station didn't compare favorably to some of the other stations either.

Don't get me wrong, even the lesser-quality station's sound wasn't bad, and it was certainly nothing the FCC would be concerned about. But, the signal quality was not as good as the station's competitors.

There could be a lot of reasons for the quality differences. Equipment, budgets or other factors could be argued as the cause. Maybe they were factors, but one fact struck me as particularly noticeable.

The lesser-quality signal came from a station with a *part-time* engineer. The higher-quality signals came from a station supported through the full-time staff of the companion TV facility.

Even the best managers or owners have their hands full trying to be financially successful. This may leave little time (or inclination) to really listen for technical problems. This task was formerly handled by the engineer.

Managers, if you don't have a full-time engineer or one working closely with you to ensure consistent high quality, you're courting disaster. It's only a matter of time. You can ignore the reality of signal deterioration for only so long. Sooner or later, the results will become obvious to your listeners — and advertisers.


In today's competitive marketplace, the success and future of your station may depend as much upon technical excellence as programming. When this happens, your engineer could turn out to be the best marketing tool you've got.



Brad Dick

Brad Dick,
editor

NAB
Broadcast
Engineering
1991

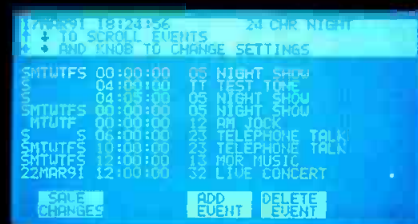

OPTIMOD ▶ FM

www.americanradiohistory.com

Signal leakage forces cable system shutdown

By Harry C. Martin



In June, the FCC's Kansas City regional office issued a cease operations order to a Kansas cable system after an inspection revealed signal leakage in excess of the commission's standards. The investigation was part of an on-going initiative designed to promote safety in air navigation by reducing potential interference by cable TV systems.

Cable systems employ a closed, non-radiating circuit system that uses the same radio frequencies as other radio services, including the aeronautical service. Signal leaks (system radiation) that cause a system to exceed the "cumulative leakage index" (CLI) as set forth in section 76.611 of the commission's rules present potentially harmful interference to aeronautical communications in the 108-137MHz and 225-400MHz frequency bands.

The Kansas cable system immediately complied with the FCC's order by shutting down operations on channels in the aeronautical bands and took immediate action to reduce the leaks. The system was not permitted to resume full operation until it complied with the commission's CLI standards.

FCC studies efficacy of TV rules

The commission has begun an inquiry proceeding in which it is seeking public comment on changes in the state of the video marketplace and the public policy implications of such changes. Specifically, the inquiry will focus on these policy implications: 1) Technological advances in video delivery systems, such as digital signal compression techniques; 2) The increasing competition in, and fragmentation of, the video marketplace as a result of technological change; 3) The ability of some competitors to rely on revenue from direct viewer payment instead of, or in addition to, advertising; and 4) The rapid increase in the availability of national sources of programming.

The inquiry was prompted by a working paper prepared by the FCC's Office of Plans and Policy (OPP), which catalogued a number of trends in the video marketplace that may be eroding the policy basis for many existing FCC rules, particu-

larly those that limit and restrict multiple and cross ownership of TV stations with other media.

Copies of OPP's working paper (No. 26), "Broadcast Television in a Multichannel Marketplace," are available through the commission's duplicating contractor, Downtown Copy Center, at 202-452-1422.

Digital voice encryption permitted for RPU facilities

As of July 25, the FCC is permitting the use of encrypted digital voice transmission by remote pickup broadcast stations. This change will help licensees prevent unauthorized interception and use by third parties of intrastation communications related to newsgathering and program production. The FCC's rule change takes into account the new frequency-modulated ("FIE") and phase-modulated ("GLE") ITU emission designators.

The new encryption methods will be confined to a nominal occupied bandwidth of 20kHz. This limit was retained because digital emission limitations are based on the use of a digitizing method, which uses the minimum signal sampling rate necessary for satisfactory voice intelligibility. The resultant emissions, the FCC said, are compatible with voice-modulated narrowband FM emissions traditionally used in the land mobile services and on most remote pickup channels. These emission limitations don't permit use of the wider bandwidths that would be required for digitizing systems using the higher signal sampling rates necessary for quality reproduction of high-fidelity programming.

Finally, the commission is requiring that stations using encryption transmit an unscrambled analog or international Morse code station identification at intervals not exceeding 15 minutes during operation, and that the parent broadcast station's call letters be used in all such identifications. The FCC said these requirements will permit easy tracing of a remote pickup source without resorting to the FCC's files.

Main studio and time-brokerage abuses cited

In a July decision, the commission fined a West Virginia FM station \$10,000 for abdicating control of its facility, and for

violating the "meaningful management and staff presence" requirement of the main studio rule. The station was rebroadcasting the signal of an independently owned AM station in its market pursuant to a time-brokerage agreement.

The FCC pointed to the following facts as evidence of an unauthorized transfer of control to the time broker:

- Although the time-brokerage agreement authorized the licensee to pre-empt or reject the broker's programming, that right had never been exercised.
- The licensee's actual role in the programming of the station (as opposed to what the contract said) was more that of a consultant or adviser than a decision maker.
- The licensee was indebted to the broker, who had financed construction of the brokered station, and there was no source of revenue independent of the broker's monthly payments. This suggested a lack of licensee control over station finances.
- The broker owned the brokered station's transmitter and negotiated for — and signed — the station's tower lease.

Because the broker had infused the brokered station with working capital, chosen and bought its equipment, selected its format and otherwise participated in and financed construction of the facility, the FCC found the licensee had abdicated de facto control to the broker. Also, as pointed out, the station was being operated at odds with its time-brokerage agreement, which provided for separate management and staff for the two stations.

With regard to the related main studio rule violation, the commission noted that the licensee's manager had not been regularly present at the studio facility during normal business hours. The station had one employee, i.e., the nominal manager, at the station's main studio, but on a part-time basis. This did not constitute a "meaningful management and staff presence" within the definition of the rule. Full-time managerial and staff presence is required, the FCC said.

Note: It is expected that the commission will relax its interpretation of the main studio rule so as to require only a management "presence" and relax the full-time physical presence requirement. I:-?)!!!!

Martin is a partner with the legal firm of Reddy, Begley & Martin, Washington, DC.



“What I Like About the Odetics Cart Machine.”

“When I joined WTVH two years ago, the existing cart handling equipment was more than 15 years old. There was a real need for a new, more reliable cart machine. I took a serious look at the machines out there, then settled on the Odetics TCS2000.

Since we installed the TCS2000, everyone here has come to share my appreciation of its capabilities. We’ve especially liked the computer-based playlist. We had been manually checking play information against a paper log. Now we download the information directly from our traffic computer, and the TCS2000 generates a playlist. With the human-error factor eliminated, on-air discrepancies have become practically non-existent.

The efficiency of the Odetics equipment has streamlined our entire operation. Our older technology machine would hold only 24 spots at a time. We load over 400 spots into the new machine. Also, we use the Odetics machine’s multi-cut feature, and that’s increased our on-line spot capability by about 33 percent.

At WTVH we run 2-1/2 hours of local news every day, so last-minute changes are routine. Using the Odetics keyboard, we

can insert new material up to 30 seconds before going on air. Deletions need only two seconds lead time.

One of the most useful aspects of the machine’s software is the reports it generates. For example, I can pull a report any time showing what spots are needed that are not already in the machine. In the past, we might not know we were missing a spot until just before air time.

This machine has certainly made my own job a lot easier. That’s what I like most of all. I don’t hear any more comments at staff meetings about spots being lost on-air, and it’s a pleasure to see those blank discrepancy reports.

If you’re considering installing a new cart machine, give me a call at (315) 425-5555. I’ll be glad to talk with you firsthand about the advantages the Odetics TCS2000 has brought to WTVH.”

Jim Bernier, Director of Engineering
WTVH Syracuse

Odetics
Broadcast



® NATAS

1515 South Manchester Avenue, Anaheim, California 92802-2907 (800) 243-2001 or (714) 774-2200

Director of Sales
Bill Keegan
(714) 774-2200

Northeast
Ray Baldock
(201) 305-0549

Southeast
Emerson Ray
(813) 960-0853

West
Chuck Martin
(818) 999-9796

North Central
Bill Boyd
(612) 894-2121

South Central
David Scally
(800) 243-2001

Circle (8) on Reply Card

Detuned at last

By John Battison, P.E.

Earlier this year (in the March and April issues), I talked about plans for detuning a new FM/LPTV tower that was to be erected close to an existing 2-tower AM array. Weather and slow contractors played a part in delaying the detuning, so the end of the story was never told. Now, the detuning is finally completed.

During construction, various difficulties slowed the process. For example, while the FM antenna was being raised (I hasten to add that I was not present), the lower end of the center tube was left open and the inner conductor fell out, ending up in a bent mass on the ground 250 feet below. After obtaining a replacement, the antenna was safely raised several weeks later. The presence of a station chief engineer could have prevented this accident.

Final array tuning, adjustment and proof can delay the air date for a new station.

The trials of detuning

I tried twice in vain to detune the tower. The first time, lighting and coax lines had not been bonded to the tower. The second time, the detuning skirt had not been completed. Finally, one glorious day I arrived and found everything ready.

During the tower work, the AM transmitter had been operating on reduced power (with an STA) to keep the monitor points within limits. After the detuning skirt's installation (but before tuning), I put the transmitter on full power and went to read the monitor points. They were both out, but not as much as they were before the skirt was installed. This was an interesting development. I returned to the site, and with a quick in-line bridge check, verified that the common point impedance was still correct. Plate voltage and current were noted as well as Icp.

With reduced power on the transmitter, I placed the field-intensity meter (FIM) on

Battison, BE's consultant on antennas and radiation, owns John H. Battison and Associates, a consulting engineering company in Loudonville, near Columbus, OH.



top of the detuning box, close to the down lead, and tuned in the carrier with the attenuator on highest range. The meter went to half scale, so I raised the power to its full 500W. The FIM reading went up slightly, and I started detuning.

Tuning was quite broad, and there was a choice of several turns for the tap to give the highest reading. Finally, I found one that I liked and left the tap in position. Then, I went back to the monitor points.

Number one was nicely in at 14.9mV/m (maximum is 18.1mV/m). Number two, usually a bit tricky, was also in at 5.1mV/m (maximum is 7.1mV/m).

A couple of quick spot measurements on other radials confirmed that the array seemed to be in. So, upon my return to the transmitter, common point impedance and current were checked, as were antenna monitor readings, plate current and voltage.

A few more monitor point checks were made as the phasor was adjusted. You might recall that the LPTV antenna was originally located on the south tower of the array. This had resulted in a +3° change to +106° for tower 2's phase to obtain the original pattern and keep the monitor points in.



Detuning box containing inductor (left) and capacitor, with base of new tower directly behind. Note detuning skirt wires around tower, terminating at feedthrough insulator on top of box.

Completing the checks

After these measurements had been completed, a final transmitter/phasor check was made to ensure the licensed values were set. The array was then handed over to the chief engineer to go and perform the hard work of running radials.

The radials showed a nice agreement with the original proof, although most were slightly low — a ratio of approximately 0.98:1 instead of 1:1. But this difference was negligible, and certainly much more acceptable than 1.1:1 or higher.

After detuning, the most favorable tower 2 array operating parameters appeared to be 1 / +102°. Therefore, FCC Form 302 now shows this for the new operation.

This partial proof was made for the purpose of requesting a return to direct measurement of power following the construction of a new FM tower. This put a time

The FM Form 302 for license must be filed within 10 days of airing commercially.

constraint on us. The FM Form 302 for license must be filed within 10 days of program test and airing commercially. Furthermore, the required AM Form 302 for return to direct measurement of power and new license application had to be filed simultaneously with or before filing the FM Form 302. Therefore, the chief engineer had to work fast to get the radials done and sent to me in time. That's the biggest problem in cases like this. Final array tuning, adjustment and proof can delay the air date for a new station. It is wise to allow twice as long as common sense would dictate to do the final tuning.

1:7:~)))

Extreme Measures

-110.0

-115.0

-120.0

-125.0

-130.0

-135.0

-140.0

-145.0

-150.0

0.0

5.00k

10.0k

15.0k

20.0k

High-performance Audio Testing With System One + DSP

DESIGNING, MANUFACTURING and MAINTAINING high-performance analog & digital audio equipment places extreme demands on your test equipment. Your test set must have extremely low residual noise and distortion as well as extremely high accuracy... and the variety of systems under test calls for extremely flexible test set-up and control.

System One + DSP from Audio Precision is the solution. The trace below is a System One + DSP FFT spectrum display showing the residual distortion performance of our generator and analyzer. 2nd harmonic distortion of the sine wave is 125dB below the 1kHz fundamental level before nulling. The 3rd, 5th & 7th are all even lower!

This self test is typical of the high-performance, high-accuracy measurement capability of System One + DSP.

System One + DSP features include:

- Dual Channel FFT Analyzer — Signals up to 80kHz may be acquired and analyzed with 16 bit resolution.
- Waveform Capture — Acquire and display signals on the PC screen for analysis in time domain "digital storage oscilloscope" mode.
- Harmonic Analysis — Perform harmonic analysis such as measurements of individual distortion components, with automatic tracking to 9th harmonic.
- Processing Power — Dual high-speed 24 bit internal DSPs and precision 16 bit analog I/O conversion.
- Low residual THD + N — Total analog system THD + N (22kHz bw) .001%. DSP analysis permits resolution of distortion as low as 145 dB below fundamental.

System One + DSP... When you're serious about performance.

System One

Audio
precision



P.O. Box 2209, Beaverton, OR 97075
503/627-0832 1-800/231-7350
FAX: 503/641-8906, TELEX: 283957 AUDIO UR

INTERNATIONAL DISTRIBUTORS Australia: IRT Electronics Pty. Ltd. (02) 439 3744 Austria, Eastern Europe: ELSINCO elektron GmbH, Wien (222) 812 17 51 Benelux: Trans European Music NV, Belgium (02) 466 50 10 Canada: Glentronix Ltd. (416) 475 8494 Denmark: AudioNord Danmark A/S 86 12 88 11 Finland: Genelec OY 77 13311 France: ETS Mesureur (1) 45 83 66 41 Germany, West: RTW GmbH 221 70 91 30 Hong Kong: TRP Consumer Electronics, Ltd. 887 2008 Italy: Medea S.r.l. 2 445 38 28 Japan: TOYO Corporation 3 279 0771 Korea: Myoung Corporation 784 9942 Mexico: Van S.A. 5 250 73 94 New Zealand: Audio & Video Wholesalers, Ltd. 71 73 414 Norway: Lydconsult (09) 19 03 81 Portugal: Acutron ELA 1 941 40 87 Singapore & Malaysia: TME Systems PTE Ltd 286 4608 Spain: Telco Electronics, S.A. 1 231 7840 Sweden: Tai & Ton AB 31 80 36 20 Switzerland: Tecnad SA (021) 806 06 06 Taiwan: Litz Technologies Ltd. 703 6280 U.K.: SSE Marketing Ltd. 01 387 1262

Circle (10) on Reply Card

An in-depth look at analog ATR circuits

Bias circuits for ATRs

By Gerry Kaufhold II

This month, we kick off a fresh concept for the "Circuits" column. Reverting back to the earlier days of *Broadcast Engineering*, the "Circuits" column will dovetail with the "Troubleshooting" column on page 18 to show a detailed look at a particular component of an analog audiotape recorder.

This month, we will examine the biasing circuit that helps improve high-frequency response of the record section of an analog audiotape recorder.

The overall bias function has five parts:

1. the bias power switch;
2. the bias oscillator;
3. the bias harmonic filter;
4. the bias trap; and
5. the bias dummy coil.

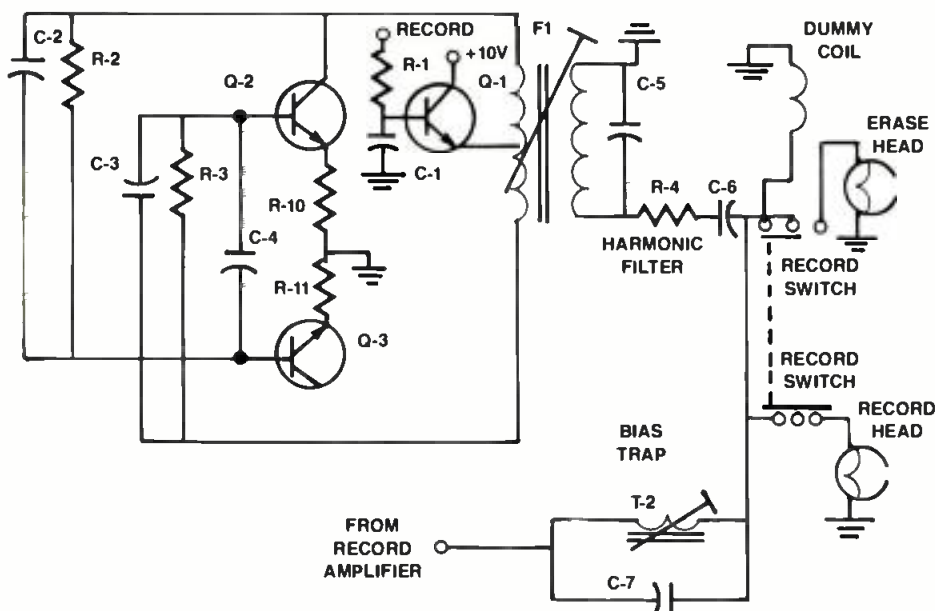


Figure 1. Diagram of a typical bias oscillator circuit.

Bias power switch and oscillator

Figure 1 shows a typical bias oscillator. This is a traditional flip-flop using discrete transistors.

Bias is only active when the recorder is in the record mode. Bias is switched on and off by controlling power into the bias

oscillator.

When the record switch is active, it applies a positive voltage to transistor Q-1, which saturates to connect +10VDC to the center tap of transformer T-1.

The base networks of transistors Q-2 and Q-3 are identical, within the limits of component matching. There are +10V that feed through the windings of T-1, through 27k Ω resistors R-2 and R-3, and charge up capacitors C-2 and C-3.

In order to make sure that transistor Q-3 fires first, a "jump-start" polarized capacitor, C-4, is applied between the bases of Q-2 and Q-3. The positive side of C-4 acts as a low impedance to the incoming current from T-1, delaying the turn-on cycle of transistor Q-2.

The delay lets transistor Q-3 turn on

frequency is dependent upon the values of R-2, R-3, C-2, C-3 and the inductance of transformer T-1.

T-1 can be adjusted to provide the exact bias frequency, which should be around 125kHz.

Harmonic filter

The oscillator is coupled through a tunable LC network made up of the parallel combination of T-1 and C-5.

Resistor R-4 and capacitor C-6 provide a series-tuned bandpass filter that rejects all but the fundamental bias frequency, which should be set to approximately 125kHz.

Bias trap

The bias trap acts to block the bias oscillator frequency from getting into the other record function amplifiers. The record amplifiers are tuned to provide optimal frequency response for incoming signals. These amplifiers would cause serious distortion if the bias frequency were to bleed into them and be amplified.

The bias trap is a parallel-tuned notch filter made up of tunable coil T-2 and capacitor C-7. When properly tuned, this network presents a high impedance to the bias frequency — effectively blocking it from the sensitive record mode amplifiers.

Dummy coil

The dummy coil provides a dummy load to the bias oscillator circuits during non-record modes. When record mode is enabled, the dummy coil is disengaged, and the full-strength bias signal is applied to the erase heads.

If there was no dummy coil to provide a load during non-record modes, the oscillator might detune, and sweep through an audible frequency range on the erase head, imparting an audible and annoying "popping" sound to the tape the instant that the record mode is entered.

Dummy coils were developed to permit audio engineers to transparently "punch in" and "punch out" during a recording session. This popular feature of modern-day audio recording depends upon proper alignment and tuning of the bias oscillator circuit.

Kaufhold is an electronics industry analyst based in Tempe, AZ.

The Most Widely Used Headphones.

As a broadcast professional, you need to listen to the audio—not the headphones. You want to feel the emotion and excitement exactly the way your audience does. That's why so

many broadcast professionals rely on AKG headphones.

It's no wonder that the 1990 and 1991 *Billboard* surveys of U.S. studios found

that AKG headphones are the "#1 Most Widely Used Studio Headphones."

Made in Vienna, AKG headphones are the product of Austria's musical heritage. Our engineers have designed their pure love of music into the best headphones in the pro market.

If you're not using our headphones now, try a pair on—and you'll hear why we're #1.



AKG Acoustics, Inc.
1525 Alvarado Street
San Leandro, California 94577 USA
Tel: (1) 510/351-3500
Fax: (1) 510/351-0500

© 1991 AKG Acoustics, Inc. AKG is a registered trademark of Akustische U. Kino-Geräte Ges.m.b.H. Austria

Circle (12) on Reply Card



A.H.I.T.



Courtesy of A.F. Associates



Control room of ABC Sports mobile unit.

Audio-video control systems

Careful design from the ground up can be the solution to interfacing audio, video and digital signals.

Some of today's production and control rooms resemble the complexity of a NASA space center. And, as complex as today's systems are, even more complicated devices are on the technological horizon.

Technical managers face a bewildering array of challenges when it comes to production and control room design. Analog, digital, composite and component are only part of the video signal issue. Add analog and digital audio signals, mix in a little MIDI and serial LANs for control, and the complexity of building and operating a video or production environment seems unsurmountable.

Fortunately, although technology increases the complexity of our lives, it also simultaneously creates new solutions. Often, these solutions lie in new and more powerful hardware. The task of the technical manager then becomes the effective use of this new equipment to the best advantage of the facility.

In this month's special coverage, we will cover some of the new technology solutions now available to the TV and production facilities. The proper use of some of these ideas can reduce costs, improve the flexibility for operators and maybe even increase your facility's competitive advantage.

"Advantages of 3-Stage Switcher Design" provides a thorough review of routing switcher design.

Using techniques developed almost 40 years ago by Charles Clos, the author shows how it's possible to reduce the number of crosspoints in a 100x100 switcher from 10,000 to only 5,700. The result is a savings in cost and complexity.

Reducing switcher size isn't the only important consideration when handling audio and video signals. The requirement to handle digital and component analog video signals simultaneously creates even more challenges in routing and control. The article, "Implementing Multiformat Routing Switchers," shows how a virtual matrix forms the basis for a well-designed switching system.

As new digital video formats become available and facilities examine ways to implement HDTV, controlling these signals increasingly becomes the topic of much concern. Switching and routing the high-speed signals can be a difficult problem. Instead of relying on coax, many view fiber as the routing solution. The issue then becomes switching. Is it possible to build a fiber-optic routing switcher? The answer is yes and the authors detail how in "Fiber-Optic Routing Switchers."

"The On-Line/Off-Line Interface" article sets the stage for compatibility between editing systems. Without advance planning, editors may find themselves working in expensive editing suites

when most of the work could have been done in much less expensive off-line facilities. See how your editors can benefit with a little forethought.

Need to store a lot of still video images? "Archiving for Productivity" shows you the technology behind an electronic video filing system. Based on magneto-optical storage, large graphic image storage becomes possible — with accessibility of these images to multiple users.

Now that you've planned the use of these new technologies, they have to be properly controlled. "Integrating Multiple Control Systems" provides an overview of some important considerations when planning that next video facility.

The ever increasing pace of technological developments challenges technical managers on many fronts. The systems designed today must serve not only today's needs, but also those of tomorrow, when the requirements may be quite different. Fortunately, solutions are available in modern production hardware.

- "Advantages of 3-Stage Switcher Design"page 26
- "Implementing Multiformat Routing Switchers"46
- "Fiber-Optic Routing Switchers"50
- "Integrating Multiple Control Systems"66
- "The On-Line/Off-Line Interface"78
- "Archiving for Productivity"86

Brad Dick

Brad Dick, editor

HBO



When you have a corporate theme line that proclaims excellence, and the programming to back it up, you can't let up on any detail.

Which explains why HBO entrusts its daily demands to Sony®: The leader in professional videotape.

HBO producers and engineers turn to the proven high technology of Sony D1 tape to ensure last-

ing image quality for graphics, special effects, and show openings. Generation after generation.

To preserve its status as "Simply the Best," HBO also uses D2 to record all productions for their comedy channel and Betacam™ videotape for taping and dubbing all remote productions.

Such demands require a world-class support team. And Sony delivers top

technicians and highly responsive sales representatives, along with in-depth research that keeps you on the leading edge of video production.

It's the closest thing to a guarantee you'll find in broadcasting. So if you like the view from the top of the mountain, there's simply one path to pursue.

Sony. The leader video leaders follow.

SONY
PROFESSIONAL TAPE

WHEN YOU'RE
SIMPLY THE BEST,
YOU SIMPLY
USE SONY TAPE.



THE LEADER IS AT IT AGAIN!

WE'VE ALREADY BUILT AND INSTALLED AN OPERATIONAL HDTV SYSTEM!

Just ask KBLR-TV39 in Las Vegas, Nevada. JAMPRO provided their antenna which permits the transmission of an HDTV signal.

State-of-the art technology and JAMPRO continue to grow together . . . we were on the leading edge when we developed the first circular polarized television antenna . . . and that tradition continues today.

OUR SYSTEM PROVIDES

- Pattern stability
- Non-scanning characteristics
- A band width wide enough to provide the superior broadcasting of a high definition signal.

FOR DETAILS

(916) 383-1177 • Telex: 377321
FAX (916) 383-1182



6939 Power Inn Road
Sacramento, CA 95829

Circle (19) on Reply Card

switching," because an input may feed many outputs (point-to-multipoint) rather than common switcher applications in telephone systems. At first, this appears simpler than point-to-point operation because many inputs will not be in use at a given

time.

time.

However, computer simulations show broadcast switching actually requires *more* middle matrices than point-to-point switching. In a simulation of a 100x100 switcher with random selection of inputs and outputs for switching commands, the number of middle matrices used increases to 19. This is still within the Clos count, but is more than the 17 used in the purely point-to-point case. For this test, many inputs will be used by one or two outputs, with a few used by three or more outputs, and many inputs not used at all. Although this is similar to what actually happens in a TV application, a more difficult pattern was developed to approximate typical usage in a TV facility with greater precision. Here, one input was used by four outputs, the next 10 inputs were used by three outputs, the next 10 inputs were used by two outputs, and the remaining inputs were used by one or no outputs. This means

middle matrices to prevent the blocking. Figure 3 demonstrates blocking in a system of reasonable size for presentation here. Although this small system doesn't save crosspoints, blockage occurs in the same way in a large system. Figure 3a is

the starting condition for a demonstration of switcher blocking, with all outputs switched to their respective inputs. In Figure 3b, output 5 was switched to input 2, requiring use of the fifth middle matrix, because no path was available through the first four middle matrices. Figure 3c shows output 6 switched to input 3, and then output 7 switched to input 4. These selections required the use of the sixth and seventh middle matrices because other paths were not available at that time due to the order of the switching requests. Several selections are now blocked. For example, output 10 can't be switched to input 1. Note that output 5 can now reach input 2 by signal copying in the second middle matrix, and output 6 could reach input 3 in the third middle matrix.

The increase in middle matrices may be a significant problem if the switching matrices are constructed out of standard building blocks. In the previous example,

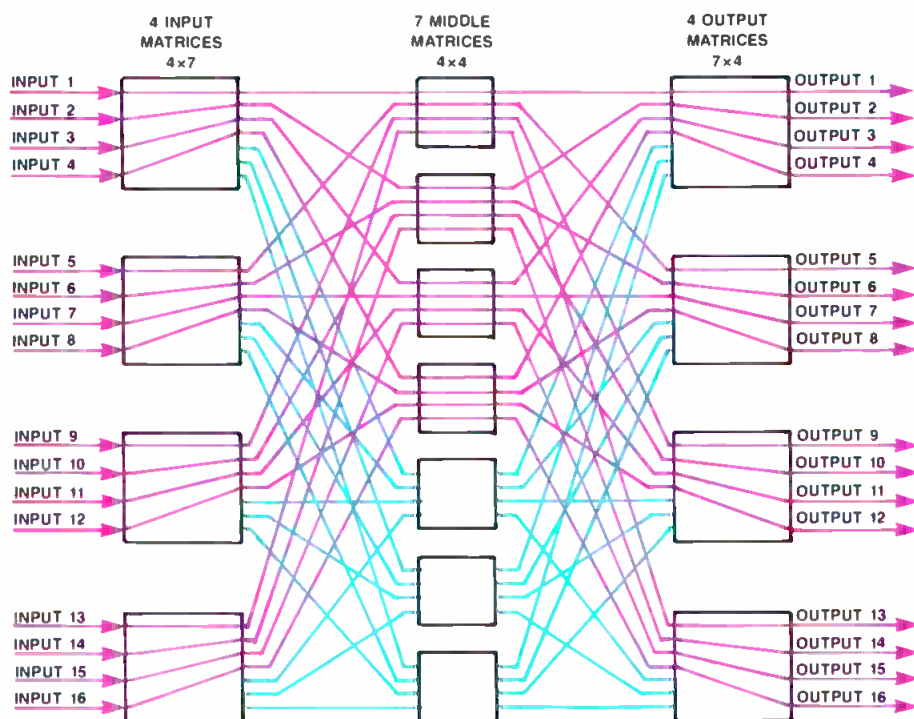


Figure 3a. A 16x16 switcher with inputs switched to matching-numbered outputs, point-to-point. Only four middle matrices are required.

that 31 outputs were being fed from the first input matrix, and 21 outputs were being fed from the second input matrix. (This was intended to model the heavy usage of certain signals, such as black, color bars, network, program and so on.) A simulation was run where one million takes were made while maintaining the loading on the inputs. This simulation required 22

an increase from 19 to 20 middle matrices only costs one additional middle matrix and the associated interconnection cables. But the increase to 21 or 22 middle matrices requires the input matrices to provide more outputs, and the output matrices to provide more inputs. Because the matrix blocks come in increments of 10

Continued on page 36

At last, a digital disk recorder priced for everyone.

(The Abekas A66)



The new Abekas A66 provides component digital video performance at analog prices. The perfect complement to any tape recorder, the A66 uses the latest in disk technology to provide D1 image quality, true random access and high quality slow motion. For on-line editing, 4:2:2 graphics or integrated news and sports broadcasting, the

new A66 is the solution. It's so flexible and affordable you'll probably buy two or three! For details call: (415) 369-5111.

Abekas

A Carlton Company

Leading in Digital Innovation

For details: (415) 369-5111 Atlanta (404) 451-0637 Chicago (708) 699-9400
Dallas (214) 385-4544 Los Angeles (818) 955-6446 New York (516) 829-0820 San Francisco (415) 369-6791

Circle (20) on Reply Card

"Little Death" created by Matt Elson for Symbolics Computer-Symbolics "Chinese Man" created by Layton Design for Abekas Video Systems "CNN Newsource Extra" created by Michael J. Lazak at Digital Post and Graphics for Turner Broadcasting Systems

Continued from page 32

inputs and 10 outputs, the crosspoint count increases from the original 5,900 to 8,200 for a system with 22 middle matrices. In a carefully contrived switching sequence — one that would not be likely to occur

in normal operations — it is possible to use up to 40 middle matrices in a 100×100 switcher. That system would require 12,000 crosspoints to construct, or 2,000 more crosspoints than a single-stage switcher. The switching of inputs to mul-

tiple outputs creates an effect similar to increasing the number of inputs on an input matrix, therefore making broadcast switching more difficult than point-to-point switching. However, there are ways around the problem.

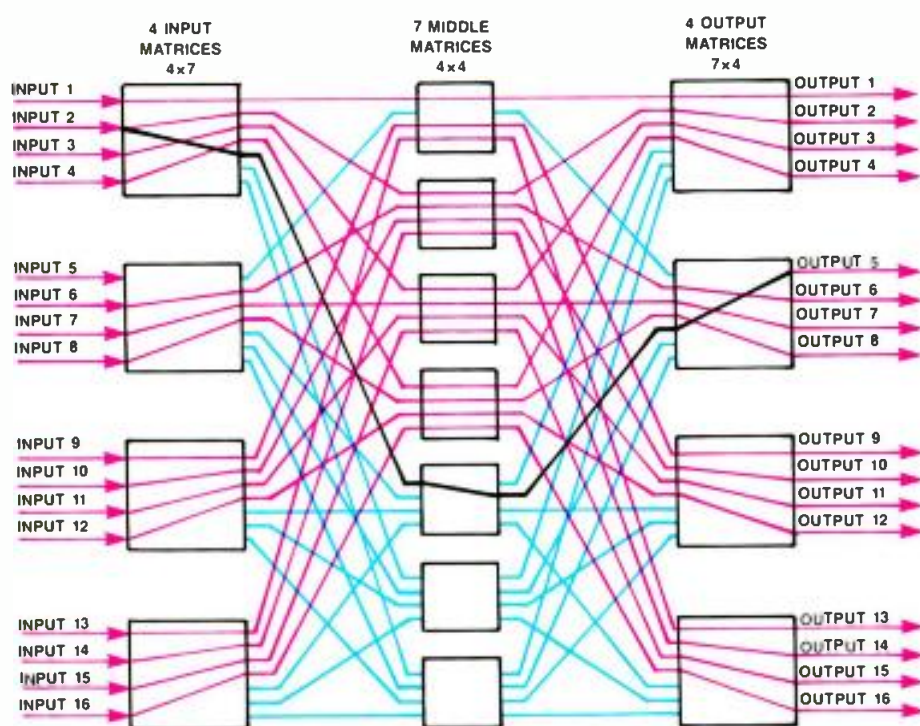


Figure 3b. Changing output 5 to input 1 requires a fifth middle matrix.

The blockages always occur at the output of an input matrix, (between input and middle matrices), typically under the following scenario. When a single input is directed to many outputs and the number of outputs required exceeds the number of outputs on a middle matrix, a second middle matrix must be used. However, a path from the original input matrix may not be available to feed that second middle matrix if other inputs in that input matrix are also being heavily used. But when only one or two inputs are heavily used, the blockages do not occur. For example, if the input loading of the previous case is distributed across all of the input matrices such that the first input matrix has an input used by four outputs, each input matrix has one input used by three outputs, one input used by two outputs, and the remaining inputs used by one or no outputs, the number of middle matrices needed is reduced from 22 to 17. This is a significant reduction for simply spreading the load evenly among all input matrices. Sharing the input loading will prevent blocking and allow the benefits of multistage switching to be used in broadcast switching applications.

Rearrangeable switching

Because the needs of a TV facility change daily, perhaps even hourly, an additional safety net is advisable. This is because a given input matrix may get heavily used at some time, allowing a blockage to occur. Referring to telephony research, it has been proven that a *rearrangeably non-blocking* point-to-point switcher can be constructed with only m middle matrices. This means only 10 middle matrices are needed for the 100 by 100 example switcher in point-to-point operation. Rearrangeably non-blocking means that if a path from an input matrix to an output matrix is not available, one can be opened by moving some of the other signals to different paths without interruption. Such "smart" systems can re-route complete paths via different middle matrices, or accomplish multiple outputs from single inputs by using *signal copying* in the middle and output matrices. (The latter process makes these matrices capable of point-to-multipoint switching.)

Figure 4 illustrates the results of rearranging. Figure 4a shows the same signal selections as Figure 3c, but all of the paths fit within the first four middle matrices. Signal copying in the middle matrices is used to feed outputs 5, 6 and 7, with out-

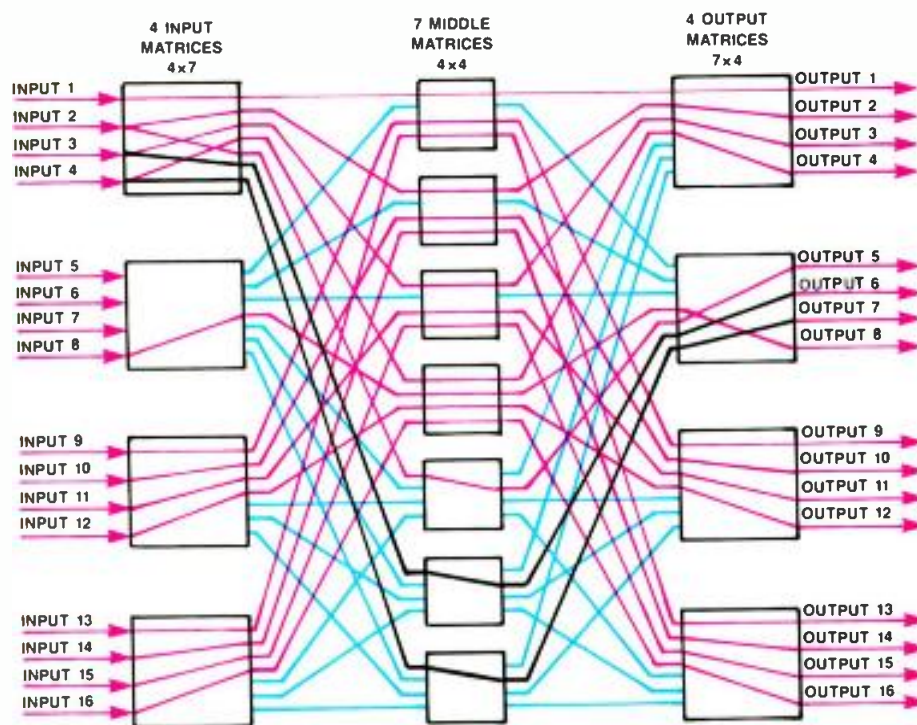


Figure 3c. Next, output 6 is changed to input 3, then output 7 to input 4. This takes all remaining middle matrices. Now, when output 10 tries switching to input 1, it is blocked. No open paths are available between middle matrices and the first input matrix.

Panasonic® Pro Series Monitors.



**Designed for production quality...
With an eye on your budget.**

S VHS

Panasonic presents two very versatile, high-grade color monitors – the BT-D1920Y and the BT-M1310Y. Built for performance, these BT-Series monitors offer you the quality and reliability you've come to expect from Panasonic. Not to mention a wide array of features at an affordable price.

Our BT-Series provides you with the controls and connections necessary for studio applications – while serving a host of industrial, educational and professional video needs.

For maximum performance and versatility, both monitors offer complete, direct compatibility with the new S-VHS format – in addition to conventional signals. And video reproduction on the BT-Series is superb. As a matter of fact, the BT-M1310Y boasts a horizontal resolution of more than 560 lines, while the BT-D1920Y

offers you greater than 550 lines.

What's more, each monitor provides you with a full set of front panel controls. Like Line A/B split, S-Video input connectors, Blue signal-only switch, pulse-cross circuit, preset picture off/on, comb/trap filter selectable and normal/underscan switch, just to name a few.

So when you are looking for professional quality, but still need to keep an eye on your budget, look into the Panasonic BT-Series high-grade monitors. For more information, call 1-800-524-0864.

Panasonic

put 8 being fed through the first middle matrix. In Figure 4b, the previously blocked take of output 10 to input 1 is possible through the fifth middle matrix. Figure

4c shows how output 9 can be re-routed to permit output 10 to use signal copying in the first middle matrix.

Rearranging can be done without any

loss or disconnection of existing signals by setting up each new path and switching to it *before* removing the old path. The only switch noticeable at the output will be when the output matrix changes from the old to new path for the same signal.



A 200x200 wideband digital routing switcher being installed at Madison Square Garden in New York. Beyond the operational advantages of such a routing system, its physical space requirements are typically less than an equivalent patchbay/DA system would require. (Photo courtesy of BTS.)

Therefore, any switching glitches or transients caused by rearranging will occur only once per output, not three times. If the switcher provides clean switching with well-matched paths, there will be no noticeable disturbance. This technique can work quite well when switching digital signals, as long as bits are not lost beyond recovery by a switching glitch.

It has been shown that a point-to-point switcher that is rearrangeably non-blocking can be constructed with n or more middle matrices. Up to $n-1$ outputs, 9 for this example, may require rearranging to open the necessary path in this switcher.³ Because broadcast operation is more difficult than point-to-point operation, you should expect to use more middle matrices. The number of middle matrices required will depend somewhat upon the amount of rearranging that will be permitted. For a reasonable amount of rearranging, I recommend 20 middle ma-

Continued on page 42

MASTER CLOCK SYSTEMS

WHEN YOU REALLY NEED THE CORRECT TIME!!



ES180 — WWV ACCURACY — \$2100

ES199 — WWV ACCURACY — \$1775

ES160/1 — 1 SEC/MO. ACCURACY — \$1525

ES160 — 3 SEC/MO. ACCURACY — \$1315

ES192A — LINE FREQUENCY ACCURACY — \$260

MANY SLAVES ARE AVAILABLE, AND ONE OF THEM PUTS TIME AND DATE ON YOUR MONITOR! \$192 - 741

**SYNCHRONIZED ANALOG SLAVES AND TIME ZONE OFFSETS ALSO AVAILABLE!
UP/DOWN SYSTEMS TOO!**

ES362A — 100 MINUTE UP/DOWN MASTER TIMER — \$420

ES520 — 60 MINUTE MASTER TIMER \$169

• TIMER SLAVES ARE AVAILABLE \$192 - \$395



PRACTICAL SOLUTIONS FOR 19 YEARS

142 SIERRA ST., EL SEGUNDO, CALIFORNIA 90245 (213) 322-2136




Circle (21) on Reply Card

Multi-Level, Multi-Format

Do ever changing standards, formats and future technology, make you wonder if there is a router that could handle your needs today without becoming obsolete tomorrow?

At Utah Scientific we've been making multi-level, multi-format routers for over 13 years. All our router designs insure both compatibility with existing systems and expansion into the future!

Control systems range from simple bus control through full router automation.

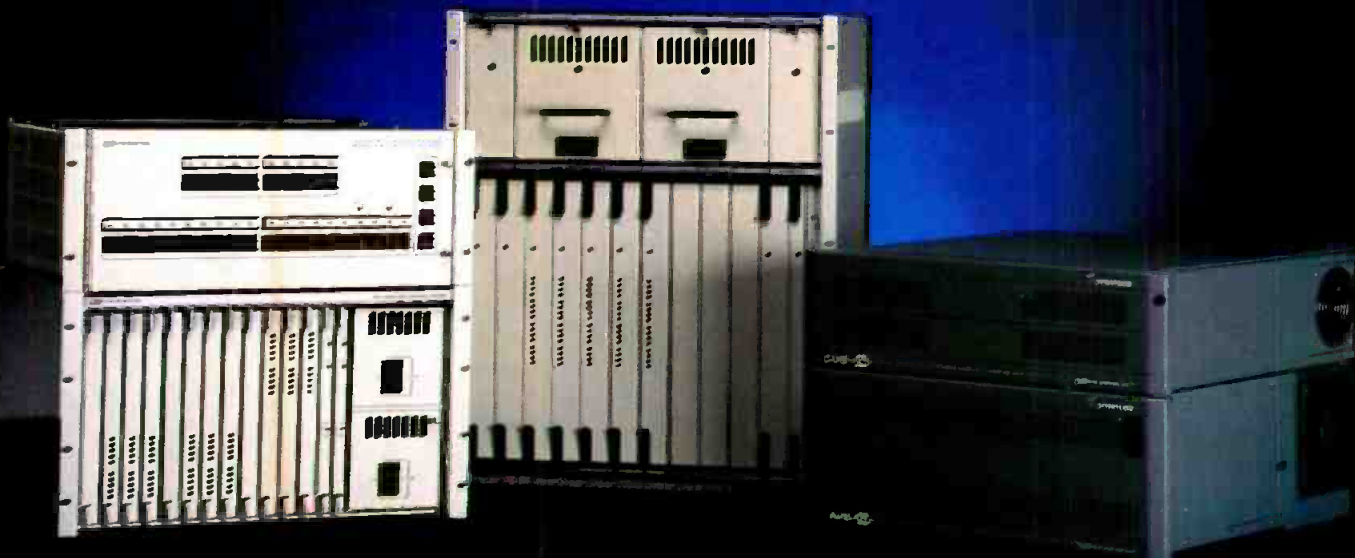

Leadership has been a part of Utah Scientific since 1978 when the company was founded.

First with reprogrammable control panels, **first** with alphanumeric mnemonics, **first** with customer configurable panels, **first** with fully automated routing and master control switchers, **first** with integrated router & machine control, and **first** in systems connectivity continue to affirm us as a world leader.

Future peace of mind is assured with our 10 year commitment to total customer satisfaction.

Use our experience!

DYNATECH BROADCAST GROUP

US UTAH SCIENTIFIC, INC.

V I S I O N.

V A L U E.™

To GET THE PICTURE Contact US at:
4750 Wiley Post Way
Salt Lake City, UT 84116
800-453-8782 or 801-575-8801

Circle (22) on Reply Card

If you think there's no difference between monitors, we have a few problems for you.

Wouldn't it be great to have a TV station monitor that could help you detect problems in your other equipment. A monitor with SMPTE C phosphors to prevent **COLOR INCONSISTENCY** between monitors. And over 600 lines of horizontal resolution to eliminate **FUZZY** details.

Of course, it would be really great if it had a beam current feedback system to stop **COLOR DRIFT**. And a broadcast CRT with an aperture grille designed to handle higher brightness without **WARPING** or **BOILING** - while maintaining color purity and uniformity. And if it had a **FLATTER** screen to provide you with a truer **PERSPECTIVE** and an auto set up system to let you avoid **TWEAKING**, that would be ideal.

Well, that's the right word for Sony's BVM-1915. It was specifically designed to meet the broadcast industry's tough standards for precise **COLOR** reproduction and reliability.

If you're using anything else, your idea of what a TV station monitor can do for you may be a bit **CLOUDY**.

For more information on how easily the newest

ence between TV station
oints we'd like to illustrate.



member of the BVM family can fit into your budget, just give
us a **RING** at 1-800-635-SONY. **SONY**

BUSINESS AND PROFESSIONAL GROUP

Implementing multi-format routing switchers



A "virtual matrix" is the key to switching in a multiformat world.

By Dan Mazur

Improvements in TV technology are significantly changing the routing and distribution requirements of broadcast and teleproduction facilities. New switching systems must handle component analog formats, RS-232/RS-422, digital video and multiple analog and/or digital audio channels. However, integrating these smaller matrices with the main house routing switcher often requires a major rewiring of the entire facility, because of the limitations in the control logic of standard routing switchers. A *virtual matrix* control system can relieve this problem by mapping the relationship between all switching levels in software.

The need for routing switchers

The routine day-to-day recording, monitoring and maintenance needs of every teleproduction facility presuppose the ability to select from any number of available signals. At least some of these switching and distribution needs can be met with a combination of patchbays and distribution amplifiers. However, complex and extensive switching networks can be established and changed more readily with a routing switcher.

A routing switcher is capable of distributing a source signal to any desired destination within the matrix. This provides the best possible use of available hardware. Once a routing switcher becomes the central interconnect point for

all equipment, uniform timing relationships and signal levels can be established throughout a facility. Equipment changes and facility expansions become greatly simplified.

There are operational as well as systems engineering advantages in using routing switchers. Control panels are usually installed in many areas throughout a facility, enhancing overall flexibility. Increasingly, these panels can be programmed to meet unique requirements. Software-based features now include the ability to assign inputs or outputs to specific buttons, the use of alphanumeric names instead of numbers to improve user-friendliness, and "protection" options to prevent unwanted switches from occurring.

Setups that are commonly used can often be defined on system terminals and executed as "salvo" switches. Many systems include a combination of local control panels, external computer control for automated time event switching sequences, and dial-up telephone control via DTMF codes. The control and distribution possibilities of a routing switcher matrix have become an indispensable design consideration in all but the smallest facilities.

Configuring a matrix

Routing switcher systems are typically manufactured as distinct video and audio matrices, capable of being controlled together. To achieve an audio-follow-video (AFV) switch, it is necessary to wire the video and audio signals to corresponding

input/output locations on the router frames. In certain situations, it may be necessary to switch the video signal without changing the audio or vice versa. These special case AFV situations require control panels with the ability to independently "split" or "breakaway" the video and audio source feeds.

Routing needs must be reassessed in light of the technological advances that have improved video and audio signal quality. The most radical proposal for improved picture quality entails the complete replacement of all established video standards with a new high-resolution alternative. The 30MHz bandwidth necessary to realize HDTV specifications greatly exceeds the performance parameters that dictated most NTSC/PAL/SECAM router designs. Although wideband routing switchers are available, you should question whether all video crosspoints should be upgraded to meet this requirement.

Other improvements have focused on preserving the quality of existing signals through new recording technologies. Today's component analog video formats used for ENG (Betacam and MII) do not impose new bandwidth demands (unlike some other RGB systems), but they do require the simultaneous switching of three video signals. Many routers can only accommodate these requirements by slaving two additional video frames together. Few manufacturers offer a practical way of using remaining frame capacity for systems in the field. Fewer still can recon-

Mazur is a consultant to Di-Tech, Deer Park, NY.

New—Component
Version Available

ProdigyTM

Experience the
genius of Videotek.



You're burning the midnight oil...Final edit's due at 8 a.m. Be glad you have Prodigy—the switcher with more brainpower in a smaller package.

Forget about old two mix/effect systems.

A reliable video switching and special effects system follows the industry standard—multi-level effects with look-ahead preview—then raises it with features no one else has, even on their most expensive systems. Prodigy offers stereo audio-follow-video, editor interface, effects memory and a programmable downstream keyer. Independent inner/outer border

softness control is standard. An RGB chroma keyer is also available.

Have it your way.

Modify Prodigy to suit your style and create memorable performances. Program up to 99 events into Prodigy's 68000 microcomputer and preview the results instantly. Ten programmable sequences link 80 on-line memory registers, and ten learned operator transitions track your actions over time. With Videotek's exclusive Times Six Plus black burst generator, system timing is virtually automatic.

Prodigy is multi-talented.

Equally at home in the post-production facility, newsroom or

studio—Prodigy rack-mounts in minutes and its software talks to a wide range of popular editing controllers.

Get your hands on a Prodigy and let the performance begin! For details or your nearest Prodigy dealer, call Videotek today.



VIDEOTEK INC.
American made technology.
And value.

243 Shoemaker Road, Pottstown,
Pennsylvania 19464 • (215) 327-2292
TWX 710-653-0125 • FAX (215) 327-9295
A Zero Defects Company

Circle (26) on Reply Card

www.americanradiohistory.com

Many of the newer VTRs provide the convenience of a separate, dedicated monitor output capable of displaying machine

The D-1 and D-2 digital video formats require an entirely new breed of routing switcher. At present, this means a multipin parallel data transmission path, although serial digital switching systems are believed to be under development. The D-2 format has been promoted as a candidate for direct replacement of the type C VTR, by retaining significant levels of compatibility with existing routing switcher systems. For this reason, D-2 switching requirements can be anticipated in the analog and digital video domains.

Advances in control systems

This can be accomplished by creating tables of source and destination names, and then mapping the crosspoints associated with each name. Because a given name could refer to a single level or AFV device, the control system must consult these tables before executing any switch. (See Figure 1.) The term *virtual matrix* has been used to describe this type of routing switcher system.

The diagram illustrates a video production control room setup. On the left, there are two cameras labeled CAM5 and CAM6, two video tape recorders labeled VTR2 and VTR1, and a device labeled DVE1. On the right is a large cyan-colored block labeled 'MATRIX INPUTS' at the top. This block contains a grid of inputs and outputs. The inputs are labeled VIDEO, AUDIO 1, AUDIO 2, TIME CODE, RGB, and RS-422. The outputs are labeled 13, 14, 15, 16, and 17. Connections are shown as lines: CAM5 and CAM6 connect to input 13; VTR2 and VTR1 connect to input 14; DVE1 connects to input 15; and output 16 connects to input 17.

The diagram illustrates a video editing system architecture. At the top, a central horizontal bus connects several modules: VIDEO MATRIX, AUD 1 MATRIX, AUD 2 MATRIX, TIME-CODE MATRIX, RGB MATRIX, and RS-422 MATRIX. Below the bus, an OUTPUT module is connected to the VIDEO MATRIX. To the left, a VIDEO TEST unit is connected to the VIDEO MATRIX. Below the bus, a TIME-CODE READER is connected to the TIME-CODE MATRIX. To the right, an EDIT CONTROLLER is connected to the RS-422 MATRIX. At the bottom, an ATR (Audio Tape Recorder) is connected to the AUD 1 and AUD 2 MATRIX modules. A GRAPHICS WORKSTATION is connected to the RGB MATRIX. The entire system is interconnected via a central bus structure.

1. The system shall be based upon parameters that users set on-line via a system terminal. These parameters should include matrix size, number of control levels, source and destination names and virtual matrix switching tables.

3. The switching matrix shall be defined in terms of source and destination names. Crosspoints associated with source or destination names may occupy any physical input/output connect point for each available control level. (See Figure 2.)

Certain operational features are essential to implementing and maintaining a virtual matrix, such as password protec-

Benefits of a virtual matrix

Teleproduction facilities will probably continue to depend upon many small, special-purpose routing switchers. Virtual matrix control offers a proven method of re-integrating these switchers into a new master grid.

1:7-9)))

**In the past year, ABC, CBS, CNN and NBC
used it to carry the Super Bowl,
the World Series, Monday Night Football,
Desert Storm coverage and more.**

**Vyvx NVN, the first
nationwide switched
fiber-optic television
transmission network.**

Broadcast quality fiber-optic television transmission is no longer a futuristic technology. It's here. It's established. It's proven. Just ask the major broadcast and cable networks who use it for transmitting news, sports and other programming.

For more and more broadcasters each day, fiber optics offers an affordable, secure, reliable, and high-quality means of delivering television signals.

Vyvx NVN operates the country's only nationwide switched fiber-optic television transmission network. Our growing

system currently serves the top 50 U.S. TV markets and is able to route your programming instantly and on demand.

**Engineered for
reliability and quality.**

Signal purity is an unmatched feature of fiber optics, making it free from uplink interference and electrical impedance. Unlike satellite transmission, fiber can't be affected by solar flares or rain attenuation. And unlike other terrestrial systems, it's impervious to water and other liquids.

Our 11,000-mile fiber-optic network is the most secure with key segments inside decommissioned steel pipeline and along pipeline and railroad rights of way.

**Easy to access and
economical to use.**

Access to our network is easy via analog last-mile facilities obtained at your request. We also provide the codecs.


The point is, fiber-optic television transmission is no longer an emerging technology. Broadcasters are already relying on it and Vyvx NVN for their most critical transmission needs.



*A Revelation in
Sight and Sound.™*

For more about the Vyvx NVN switched fiber-optic television network, call 1-800-324-8686.

A Subsidiary of WilTel, Inc.
Circle (30) on Reply Card

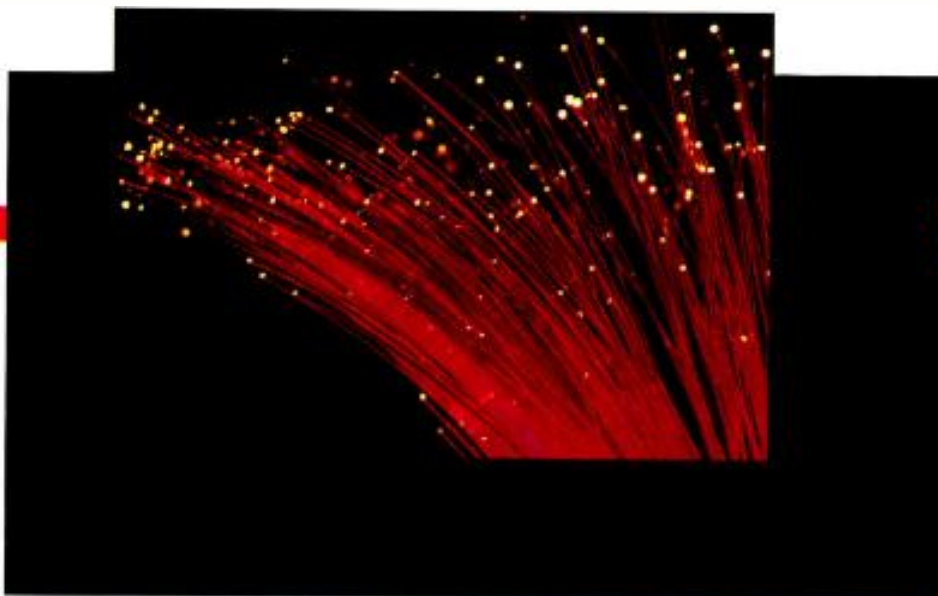

sions at the inputs and the outputs. The electrical signals are then sent to and received from the crosspoint modules via high-speed, controlled-impedance, board-to-board interconnects. All signal traces on the circuit boards are also of controlled-impedance microstrip.

The I/O modules always send and receive the same voltage levels to and from the crosspoint cards, allowing many different fiber-optic formats to be mixed in a system. The I/O modules are the "elastic" that allows for maximum flexibility in customizing every system for each application. For example, a system could contain single-mode and multimode fiber with low-cost LEDs and high-speed, high-power laser diodes, all in the same switching system. Also, various FO connector types, such as ST, SMA and FC, can be mixed. Coax I/O can also be easily accomplished with a modular approach, and can be mixed with fiber-optic I/O.

Because these are active systems, the data rates and wavelengths of the optical signals must be known in order to optimize the optical-to-electrical conversions. Another important piece of required information is whether the datastream contains *run-length limited code* (RLL). An NRZ datastream may contain a long string of continuous 1s or 0s. This is essentially a steady-state condition. Many high-speed data products contain AC- (capacitively) coupled circuits. AC coupling improves noise margin and simplifies some interface designs, allowing higher speeds and lower costs. But during long strings of continuous 1s or 0s, the coupling capacitor begins to discharge, leading to possible data error. One common solution is the use of run-length limited code. This encoding technique ensures that there will never be long strings of continuous 1s or 0s. Another solution is the use of DC-coupled circuits. Even there, however, long strings of continuous 1s and 0s can induce data errors if the clock and data recovery circuit at the receiver loses synchronization.

Two ways to switch fiber-optic signals are optically or electronically.

GaAs technology achieves high data rates

As the data rates through routers increase into the hundreds of megabits-per-second range, the switching capabilities of silicon-based crosspoint switches arrive at

a physical limitation — the switches are simply not fast enough. They also begin to dissipate a great deal of power at these speeds. It becomes necessary to step up to GaAs-based ICs. Crosspoint switches using GaAs technology can be used up into

the gigabits-per-second range with good signal fidelity.

GaAs, by nature, has fundamental physical and electrical characteristics that make it an ideal material for high-speed, wide-bandwidth circuits. At lower data rates, this speed can be moderated to reduce power dissipation substantially. Speed-power performance of GaAs is approximately five times higher than that of corresponding doped silicon devices.

In addition to its speed-power advantage, GaAs exhibits a higher energy band-gap than silicon, yielding a potential for higher temperature operation, and, therefore, much better reliability. This translates into routers that have low failure rates.

Digital crosspoint attributes

The basic building block of the system described in this article is a 16×16 digital crosspoint switch capable of operating at 2.6Gb/s. Typical video applications operate at only 270Mb/s.

The switch incorporates a non-blocking design, preventing routing problems from heavily used inputs and outputs. It can also be reconfigured at one time.

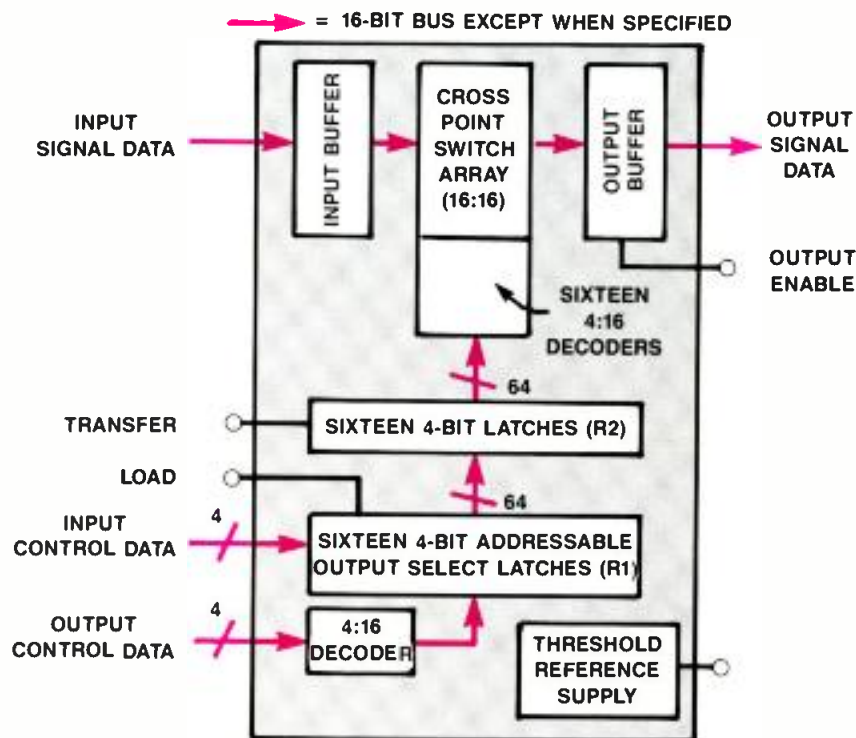


Figure 1. This 16×16 digital crosspoint switch features a double row of input/output select latches (center). While the switch is active (transmitting) prior to a reconfiguration, the first row of input/output select latches (R1) is serially loaded at a rate of 3ns per I/O selection. When all I/Os to be changed have been loaded in R1, the content of R1 is parallel-transferred to the second row of select latches (R2), resulting in a complete switch reconfiguration in just 3.6ns. No data dropout occurs for any output whose input connection does not change.

Now You Can Create Your Broadcast STL From Our Field-Proven Line Of Broadcast Radios.

With one broad stroke we've positioned Microwave Networks as the industry's premiere video supplier. By using video technology from Rockwell International Corporation, we have added 2, 6, 7, 8, 11 and 13 GHz video radios to our line of MicroNet products. Microwave Networks can now meet all your Studio-to-Transmitter Link (STL) requirements.

Along with our 15, 18 and 23 GHz radios, Microwave Networks has become a leading provider of broadcast links by offering a complete line of 2



through 23 GHz video radios.

Our MicroNet family of analog radios provide the highest quality video and audio transmission for both NTSC and PAL/SECAM. They meet or exceed all EIA short-haul RS250C specifications and deliver true common carrier performance to assure broadcast quality. With simplex, duplex and multiple channel configurations, MicroNet radios can solve any video transmission requirement.

And that means flexibility! The flexibility to expand or upgrade your MicroNet radio network quickly and easily.

Microwave Networks provides unmatched service and support, including site and system engineering, frequency analysis, installation and training. We even have a 24-hour customer-service hotline.

Quality engineering, reliable product design and complete customer support. It's no wonder we're the first choice in video transmission. Call Microwave Networks today! 1-800-749-2577.



10795 Rockley Road, Houston, Texas 77099
(713) 495-7123 FAX (713) 879-4728

Visit us at SBE in Houston, Texas, October 3-6, Booth #529
and

SMPTE in Los Angeles, CA, October 26-30, Booth #1110

The MVR-1000 Series of microwave video radios are manufactured under license from Rockwell International Corporation.

Circle (34) on Reply Card



ended crosspoint switch and a differential crosspoint switch at high data rates.

The next generation of crosspoint switches will be able to integrate 32x32 and 64x64 differential switch matrices at the same high data rate as is now possi-

good news/bad news situation. The bad news: The short-term installation costs will be slightly on the high side. The good news: The facility will have a much longer, more flexible and more productive life span, resulting in significantly lower long-

ble in 16x16 modules. This will help reduce the board size and simplify the router design, because four 16x16 crosspoint switches are required to design a 32x32 switch matrix.

Finally, low-power GaAs or BiCMOS technologies and shorter gate length processes will be used to reduce power dissipation and simplify heat-sinking requirements.


As video production facilities have grown over the years, the routing requirements have become increasingly more complex. With many different types of signals, and the variety of production switchers, machine control and the many stand-alone "boxes" now available, the only element that they all may have in common is a facilities control system. Intelligent control has become a must: it's no longer a "wire-per-crosspoint" world.

Cost considerations

The cost of installing fiber optics is a

term costs. There are also many ways to keep the short-term cost difference to a minimum. The bulk of this expense is in the connectorization of the fiber-optic cables, and the optical-to-electrical converters, the latter being where most opportunities to trim costs exist. Currently, the fastest, most powerful and most expensive drivers are laser diodes. Unless data rates are high, however, (300Mbit/s to 500Mbit/s or more) or signals must be transmitted over long distances (2km), these drivers are unnecessary. Most applications can use 820nm LED drivers on multimode fiber. The longer wavelength of 1,300nm LEDs makes them more expensive, but they exhibit less modal dispersion in the fiber, allowing greater transmission distances. They are also a little faster than 820nm LEDs. However, new research shows that the performance of 820nm LEDs may be greatly improved, providing high speed at low cost.

The price of the fiber-optic cable is al-

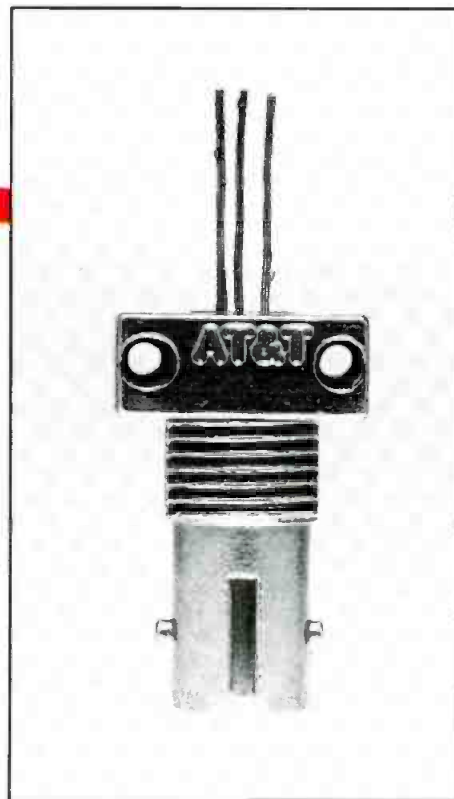

The fiber-optic ST connector is the most widely used in the United States today. Like a BNC, it is a bayonet twist-lock, but smaller. Most ST receptacles use lensed optics, resulting in less than 1dB of connector loss.

SONEX!

Sound your best. Room acoustics can make or break the audio quality of your projects. And nothing controls and improves acoustics like SONEX. From the classic SONEX shape to state-of-the-art barriers and ceilings, we have the solutions. Call today for our new information packet.

Hillbruck
1-800-662-0032

Circle (37) on Reply Card

FOR SUB LEASE NETWORK OPERATIONS FACILITY

21,000 sq. ft. network operations facility, Laguna Niguel, 65 miles south of L.A.

Simultaneous multiple operations: 2 satellite uplinks, network operations, prod. post-prod./editing.

Renovated top to bottom.

100 kw generator backs air and studio operations.

Good arterial access, hotels, restaurants.

Contact:
Greg Long, Univision
816-274-4240.

Circle (38) on Reply Card

Acrodyne...the best of all worlds.

UHF TV Transmitters

Solid State Technology



The proof is in! Since 1989, Acrodyne has been delivering affordable solid state 1 kW UHF TV transmitters—no tubes, no tuning, no downtime.

- Redundant power supplies
- Built-in diagnostics
- Modular construction
- Frequency agile designs

Advanced Tetrode Technology

Our product line includes the world's only single tetrode 25 kW UHF TV transmitter. Acrodyne's advanced systems are demonstrating exceptional field reliability—the only new UHF transmitter development which meets and routinely exceeds expected tube life at full rated power.

- Ultra high plant efficiency
- Solid state drivers
- Inherent linearity minimizes precorrection
- Low cost tube replacement
- Parallel systems available

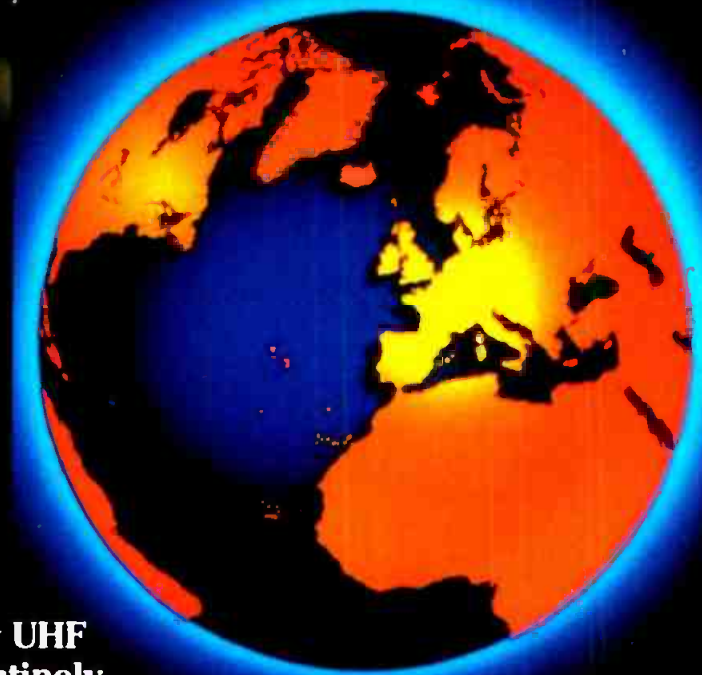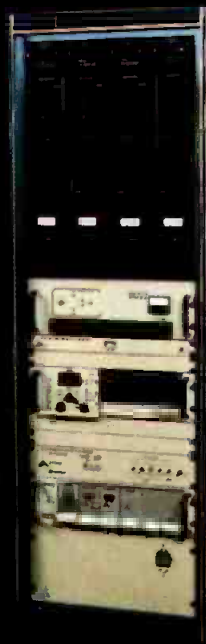

Tomorrow's digital TV transmitter company

ACRODYNE

Acrodyne Industries, Inc.
516 Township Line Road
Blue Bell, PA 19422
800-523-2596
or (215) 542-7000
FAX: (215) 540-5837

©1991 Acrodyne Industries, Inc. All rights reserved.
Circle (39) on Reply Card



**Now Available
30kW
10% aural output**

EMF

HOW DANGEROUS?

A Major Two-Day Conference Designed To Keep You Totally Informed About Electric And Magnetic Fields

March 9-10, 1992

Transmission & Distribution Magazine's Second EMF Conference and Debate will be held at Crystal Gateway Marriott Hotel, Arlington, VA. It is designed to provide you with a continuing dialogue about one of the most controversial and critical environmental issues of the 1990's.

T&D Magazine's two-day conference will feature 16 hours of lively dynamic commentary and discussion on the details of EMF. A blue ribbon panel of experts will discuss the important topics that surround the debate.

Who Should Attend

Electric Utilities; Telephone Companies; Electrical Contractors; Electricians; Broadcast Engineers; Federal, State, Local Governments; School Systems; Health Agencies; Legal Firms responsible for litigating the issue; and Trade Organizations and Groups concerned about the issue.


What You'll Learn

- An International Perspective of the EMF Issue
- A Complete Review of Scientific Research
- What to Expect from Government
- Regulating EMF and Litigating EMF in Court
- The Impact of EMF on Workers—Electric Utility and Telephone Workers, Electrical Contractors, and Electricians
- What Consumer Groups Are Doing about EMF
- Case Studies—Industry's Position and Perspective of the EMF Issue
- The Costs of EMF to Industry

For more information call
Barry LeCerc/ Carolyn McNasby
Tel: 215-359-1249

Circle (112) on Reply Card

(A) SINGLE-ENDED I/Os

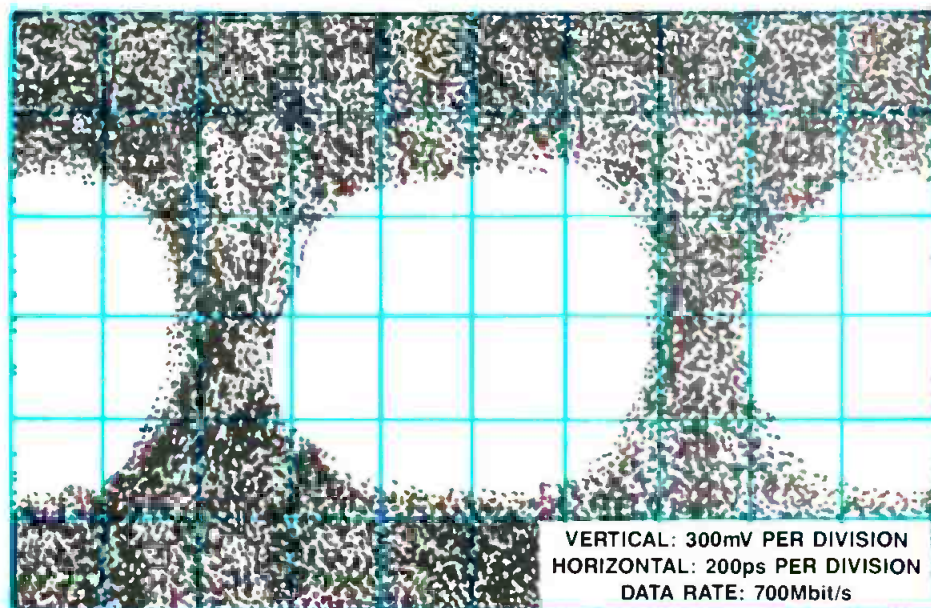

(B) DIFFERENTIAL I/Os

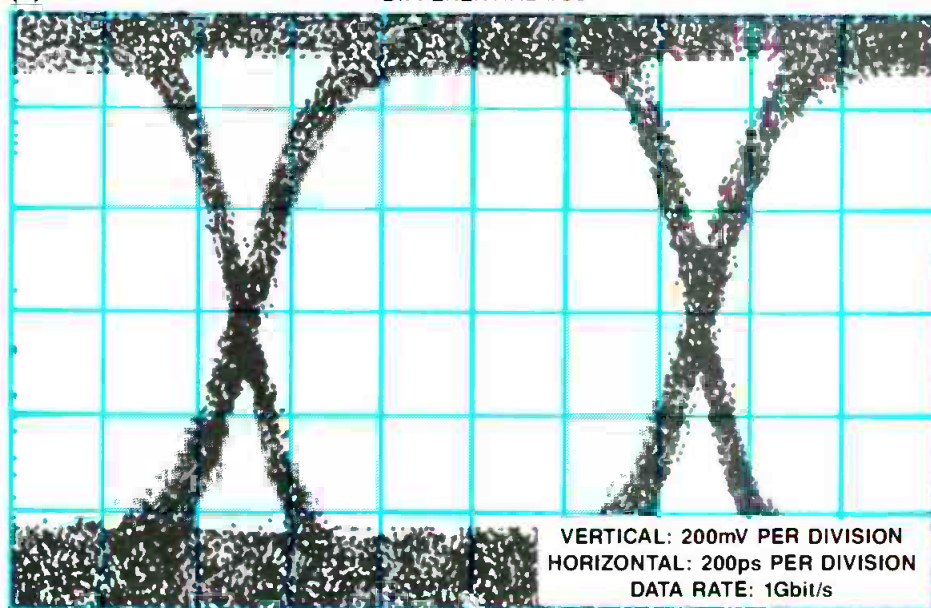


Figure 2. In (a), "eye pattern" is shown for a digital crosspoint switcher using single-ended I/Os. Significant improvement is shown in (b), from reduced crosstalk when differential I/Os are used. Note that pattern improves even with somewhat higher data rate used in (b). (Courtesy of Integrated Switching Systems.)

ready competitive with coax, and the video coax-to-fiber conversion process is easy and cost-effective. The original FO connectors of 10 to 20 years ago were expensive, unreliable and difficult to use. This is no longer the case. Today's FO connectors are strong, reliable, easy to use, efficient and cost-effective.

A great deal of ongoing research will likely produce continued improvements in optoelectric conversion and connectorization. This is a dynamic technology, but the basic optical fiber will remain fully compatible with all future updates.

One other major element in the cost of a system is its size. Today's basic building blocks run 16x16, with simple expansion to 32x32 or 64x64. Above 64x64, a num-

ber of new multistage non-blocking architectures should be seriously considered. These multistage architectures reduce crosspoint count, power consumption, size and cost. (See "Advantages of 3-Stage Switchers," pg. 26.) Full matrix configurations of 128x128 and much larger are currently possible, however.


Looking ahead, it seems clear that a new generation of cost-effective and easy-to-use fiber-optic components are synergistically merging with high-speed electronic devices. Together they can provide the capacities that the industry requires, at a price the industry can afford, in hardware that will remain viable and in service well into the future.

1:7-3))))))

SYSTEL - 3000

DIGITAL MULTI-HYBRID TELEPHONE SYSTEM

- Digital signal processed hybrid system.
- Microprocessor controlled via standard RS-232 or RS-422 interface.
- Up to eight telephone lines in full multiplex communication, by way of the internal MIX-MINUS buss structure.
- No preliminary adjustment or line measurement is required; simply connect it and work!
- Easy to use: the control module can be either a small dedicated console or a standard PC or compatible.
- Line functions and controls are independent for each input module; the technician's job is made easier than ever, even in the software version.
- The switching section handles up to eight telephones, plus the control telephone and the studio telephone.
- Each input module includes:
 - Superb 60dB sidetone rejection.
 - 128 step digital adaptive filter.
 - 24 bit coefficients.
 - 16 bit sigma-delta A/D converters.
 - Switched-capacitor antialiasing filter, with 80dB rejection.
 - Line inputs safety protected against line transients and discharges, according to CCITT regulations.
- Some of the functions included on the digital processed section are:
 - Digital AGC included in the self-adaptive filter.
 - Doubletalk detection, without influence in the adaptive procedure.
 - Noise reduction procedure, using a white noise generator applied in the digital domain.
 - Noise free line switching, using stand-by signal timing.
 - Supervisory function of line status, with detection of dialing tones and signalling (busy line, disconnection, etc.)

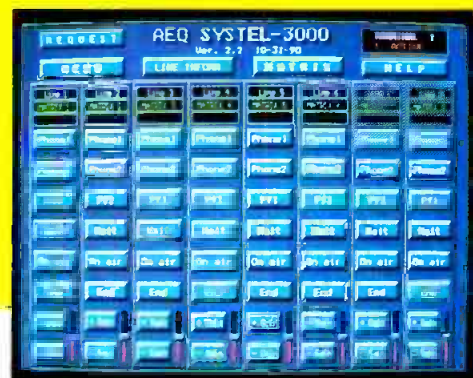

THE *Digital* SPECIALIST ON *Analog* TELEPHONE LINES

aeq

APLICACIONES ELECTRONICAS QUASAR, S.A.

CENTRAL OFFICE: P. Leganés c/ Rey Pastor, 36 - 28914 LEGANÉS, MADRID (SPAIN). Tel: 011-34-1-686 13 00 - Fax: 011-34-1-686 44 92

Circle (40) on Reply Card

www.americanradiohistory.com

SBE '91



HOUSTON

GATEWAY TO THE FUTURE OF TECHNOLOGY

OCTOBER 2-5

GEORGE R. BROWN CONVENTION CENTER

What does the future of technology have in store for you? The rapid changes in technology make it tough to be a broadcast engineer. To be successful you need to keep up with the changing technology and stay ahead of the game. You can achieve this by attending the 1991 SBE National Convention and Broadcast Engineering Conference.

Seminars will update you on the latest in new technology including:

Facility Automation
Digital Audio Broadcasting
FCC Regulations
The Digital Studio

The SBE convention provides more than 250 exhibits, all designed to meet

your needs as well as introduce you to new technology. See what the future has to offer and stay ahead of the game.

One of the best resources of technological advances lies within NASA's Mission Control Center. Join SBE in our tour of Mission Control and Lyndon B. Johnson Space Center and see what the future of technology has in store for you.

Be a leader in the industry and set the stage for your successful future by staying ahead of the game at the 1991 SBE National convention and Broadcast Engineering Conference, October 2-5. Call SBE for more information: 317-253-0122.

REGISTER NOW FOR THE SBE NATIONAL CONVENTION!

Belden has **BIG NEWS** for the broadcast industry



Belden is on the air with the industry's largest portfolio of new broadcast cables.

More than 60% of the products listed in Belden's new Broadcast Catalog didn't even exist just 2 years ago! Belden's new 48-page Broadcast Cable and Connector Catalog provides specifications for the industry's most complete line of cabling products, including audio multi-conductor cables, microphone cables, video coaxial cables, video triaxial cables, audio & video composite cables, bundled coaxial composite cables, fiber optic cables, cable assemblies and connectors.

New levels of excellence and innovation

During the past few years, Belden has introduced more product innovations for more broadcast cabling applications than any other cable company. This commitment to innovation and technical excellence is the reason Belden remains the broadcast industry's No. 1 cabling choice, worldwide. It's a position we've worked hard to earn and will fight hard to keep with new products, new options and even higher levels of excellence in the future.



For a FREE copy of Belden's new Broadcast Cable & Connector Catalog plus updates on our latest

product innovations, contact your local Belden distributor or call toll-free: **1-800-BELDEN-4**



BELDEN

Circle (42) on Reply Card

www.americanradiohistory.com

Copyright © 1991 Cooper Industries, Inc.

Integrating multiple control systems



Computers simplify system control in modern broadcast facilities.

By Roald Steen

The history of automated control in the broadcast industry is almost as old as the industry itself. As soon as the first radio stations acquired equipment, engineers began to develop remote controls to allow operators to run equipment efficiently from a single location. It was the same with television. Master control and day-of-air switching centers needed centralized control to give the broadcasts a professional appearance, and to use manpower effectively.

Today, broadcast automation and control continues to be driven by these needs. This article will overview several new developments in the field of control.

Computers and microprocessors

Early automation systems consisted of custom-built chassis filled with relays and switches. These systems were often unreliable and frequently unserviceable.

Over the years, the systems typically acquired many additions and modifications, some of which were undocumented. Eventually, new engineers and operators may have required extensive training before they could manage the many controls sprouting from the console. Much of the difficulty may have stemmed from trying to interface systems that were not compatible.

Steen is a certified electronics instructor and free-lance author based in Woodbury, MN.



The computer has formed a common interface between operators and many different pieces of broadcast equipment. (Photo courtesy of Odetics.)

The computer has recently made possible more powerful, yet simpler, control systems. With the computer, programs and commercials can be planned and scheduled long before they go on the air.

Lights, camera, action...

Computers can also now interface with many types of broadcast equipment, including the transmitter, tape decks, cartridge machines, studio cameras and

Video Graphics to Set the World on Fire

Wait a minute. You must have spent all day and a lot of money to get this look.

Hot, huh?

Real hot. But high-end video graphics on our budget?

No sweat. We're under budget and on time.

Right. And just how did you do that?

On a single text and image generator. In our edit suite.

You're kidding. No paint system? No switcher or still store?

You're getting warmer.

Okay. So what's making us look red-hot?

QUANTA. And the ORION-SE and DELTA family of products.

Why didn't you say so?


Turn on the heat with text and image generators from the hot industry leader in cost-effective video graphics. We're setting the world on fire. Call (801) 328-8872.

QUANTA

POWERFUL CREATIVE ANSWERS

Circle 43 on Reply Card



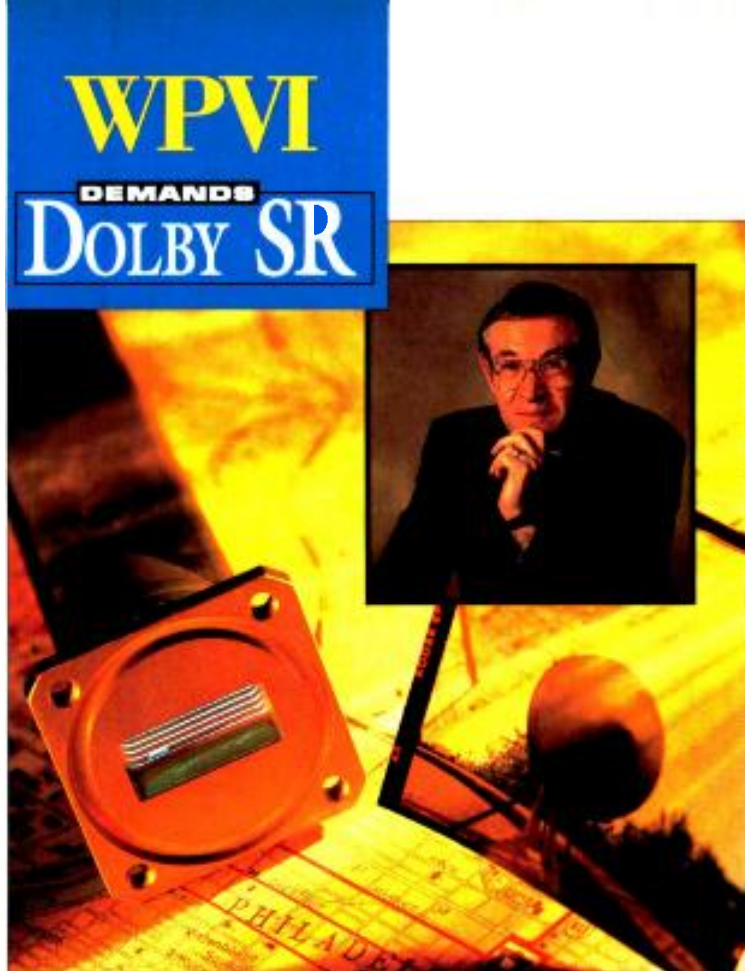

Irwin Ross, Director of Engineering at WPVI, Philadelphia

“Dolby SR gives us the sound quality we needed”

“When WPVI-TV converted from mono to stereo, we decided to provide the best stereo sound possible consistent with a minimum of coloration and processing.

After investigating various systems, we felt that our goal could best be met by using individual subcarriers on the STL augmented with Dolby SR.

Realizing that many of our viewers would be listening to our stereo programming on high quality equipment, we wanted to be sure to deliver the best sound.

When we installed Dolby SR, our measurements and listening tests proved our decision to be correct; and our viewers agree.”

Irwin Ross, Director of Engineering

*WPVI, an ABC affiliate,
broadcast its first program
on May 1, 1949*



Call us at (415) 558-0200 for more information
on how you can benefit from Dolby SR.

Dolby SR: now over 55,000 channels worldwide

lights. Automatic control requires that this equipment interface with the existing station control systems.

Desktop computers control many satellite uplinks and downlinks that are found in TV stations. Satellite control systems

can energize the uplink, change transponders, and drive the actuators for antenna azimuth, elevation and polarization. Some systems can also perform unattended recording of incoming feeds and network delay tasks.

Automated switching of video, audio and data links are important functions. Manufacturers of routing switchers and other switching devices are now designing many products that can interface with desktop computers. This brings two advantages. First, it eliminates the cost of installing fixed control panels. Second, the computer front-end may require less operator training than a conventional panel. This is because the interface can effectively disguise the router from the user.

However, routing switcher manufacturers have increased their products' user-friendliness. Modern panels use mnemonics (source names) extensively, not input or output numbers. This makes operating the panel more intuitive. Also, the new breed of control panels is highly connective. Users can even communicate with some panels from remote locations via touch-tone or cellular phone. In fact, the new switchers are so adaptable that one company has installed large interconnect routing switchers in Los Angeles and New York. Subscribers can switch the inputs to their own facilities using little more than a router control panel. By taking the telco's old manual patchbay out of the loop, the subscribers avoid expensive switching fees, and get the feeds they need on demand.


Control locations

Although most facilities have a central control room, control of broadcasts is also possible from other locations. Control may be performed in the studio, in the newsroom, at remote sites, at the satellite downlink and at the transmitter site.

In effect, you could talk about a hierarchy of control points. Some modern broadcast centers' systems are designed along these lines. Local control is available when it is needed. When it is not required, control defaults to a central point. In this way, control rooms and other facilities need to be manned only when doing so may bring a bottom-line advantage.

In this discussion it would be helpful to broaden the definition of "control." In addition to denoting the power to make something happen by pushing a button, control can also be exerted by information — making a decision or voicing a command. In a live TV news program, for

TELEMETRICS

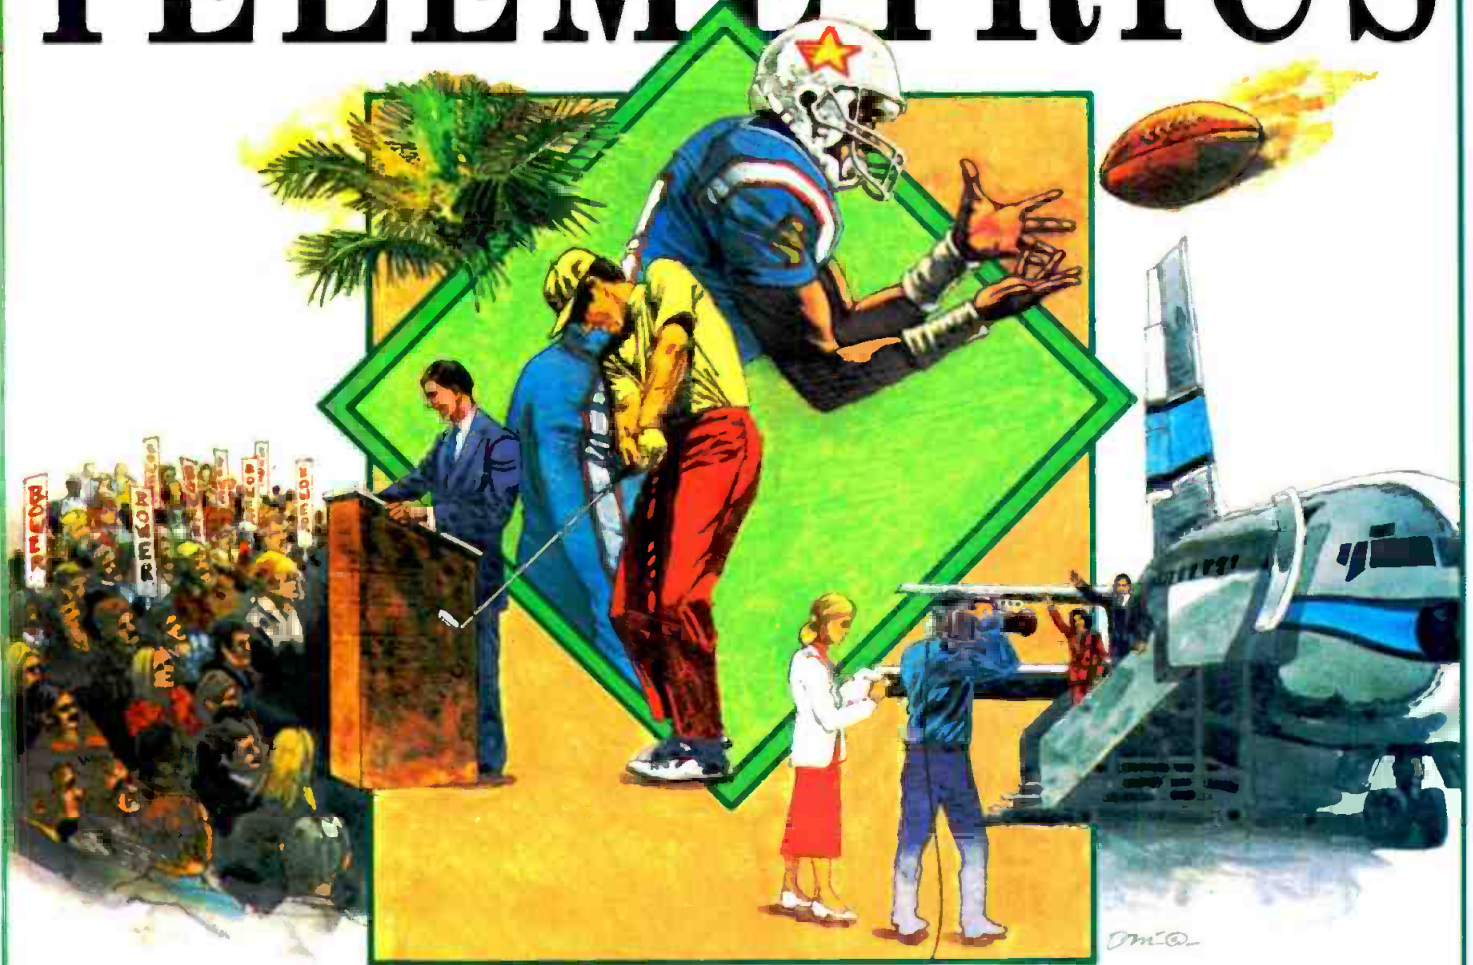

Takes You Where The Action Is.

On the football field. In the streets. At the convention. When it's happening live, Telemetrics is there...and we have been for more than 20 years.

The innovative and economical Telemetrics Camera Control System consists of a portable Triax Adaptor linked via Triax or Coax cable to a compact, one-rack unit Base Station. All signals are transmitted on one cable—Video, Audio, Control, Interphone, Genlock, Tally and Power—with a range of up to 5,000 feet.

No matter what camera you use, we have a Triax Unit that's customized to complement its unique features.

All of them. Lightweight, portable and easy-to-operate, our Triax Adaptors are completely compatible with serial data for Pan/Tilt-Zoom/Focus and Remote Control.



For ENG and EFP-type cameras—
Sony, Panasonic, Hitachi,
Ikegami and BTS.

Telemetrics. We take you where the action is.
Reducing your operating costs.
Increasing your programming flexibility.
With complete, unparalleled reliability.

Telemetrics Inc.

7 Valley Street, Hawthorne, N.J. 07506
Tel. (201) 423-0347 Fax (201) 423-5635
Ask for info on Pan/Tilt Systems.

instance, the technical director pulls the T-bar when the director says "take." Similarly, the decision to use one program segment instead of another generally falls to the producer, who in return may respond to directions from superiors.

cently commissioned to automate the traffic department. He rooted out several inefficiencies, leading to great cost savings. Other functions, such as personnel scheduling, budgeting and payroll, may be similarly investigated.

Training and manuals

The ability to use desktop computers is widespread. New employees will usually learn quickly how to use a PC that has been adapted to control station functions. Another advantage to using small computers is that they can contain diagnostic routines. Self-diagnostic systems can sense abnormal situations. When one occurs, the system may then indicate the cause, and provide suggestions to correct the problem.

The information flow in a broadcast station is not limited to the control room. Information from other departments also influences what goes over the air. Traffic, billing and sales departments provide important input, as does station management. (See "End-to-End Automation," April 1991.)

The value of considering these extended control points lies in making their influence more direct, hence more efficient. For instance, one chief engineer was re-

A control room with many integrated devices should be equipped with manuals and procedures explaining how the equipment works and what to do when something fails. Some manufacturers supply their manuals on paper and in an elec-

tronic form. The latter can be retrieved on a desktop computer or workstation. The electronic manual is organized so that important information can be retrieved quickly when needed.

Digital difference

Digital signal processing systems transfer the broadcast information in digital rather than analog form. Digital interface requires unique techniques. This is because the bandwidths can be exceedingly high.

The most efficient digital link is probably the shortest one. Many manufacturers are now building complete broadcast subsystems that fit on PC cards. Installed in a computer chassis, the systems can generate special effects, perform titling, switch video and audio signals, and even edit tapes.

The station identifications for many radio facilities are now generated on such devices. Some of these systems offer advanced features, including the ability to synthesize either male or female voices. A new system for TV IDs stores audio files as extensions of the image file. The results are TV IDs that can be produced without slides, still-stores or audio cart machines.

Interface compatibility

It is difficult to interconnect equipment with either the equipment of other manufacturers or existing station equipment, unless such equipment follows standard recommendations. Therefore, many equipment makers incorporate the RS-422 interface in their equipment. The RS-422 interface has replaced the RS-232 interface in newer equipment, and complies with the SMPTE standard interface.

As the computing power available on the desktop increases, so does the potential role of the PC as a control tool. It really doesn't take that much computing horsepower to control a facility. Some experts feel the average 386 PC has plenty. (See "Implementing PC-Based Automation," April 1991.) However, harnessing that power may be a different matter.

Remember that any automation system is likely to suffer from unforeseen problems, especially in the beginning. The ability to override the automation system easily is important. So is redundancy, so other systems are available to take over whenever one system fails.

Network options

Computers may be configured in different ways. A powerful central computer



Computers can control multiple tape machines for automated recording and playback of incoming feeds. These systems also have application in network delay of broadcasts to accommodate time zones. (Photo courtesy of Time Logic.)



Get Auditronics' 900 audio console... for television that sounds as good as it looks

Upgrade your stereo audio to full parity with your video using the Auditronics 900 Series of audio consoles designed specifically for television news and production.

Now you can deliver seamless, glitch-free audio with source and assign switching functions controlled by the 900's built-in hard-disk computer. The console's computer remembers up to 64 set-ups and communicates with your house audio/video router via an RS232 or 422 communications bus.

Our 32-input 900 with 12 microphone and

20 line-input modules handles 48 mic and 200 stereo line inputs. And Auditronics' deft design crams all this functionality into a one-operator console that uses less than 20 square feet of precious control room space.


If you're ready for stereo audio production that makes your station sound as good as it looks, get your hands on Auditronics' computer-based 900 television console.

Call today for your information package.



auditronics, inc.

3750 Old Getwell Road
Memphis, TN 38118
901-362-1350
FAX 901-365-8629

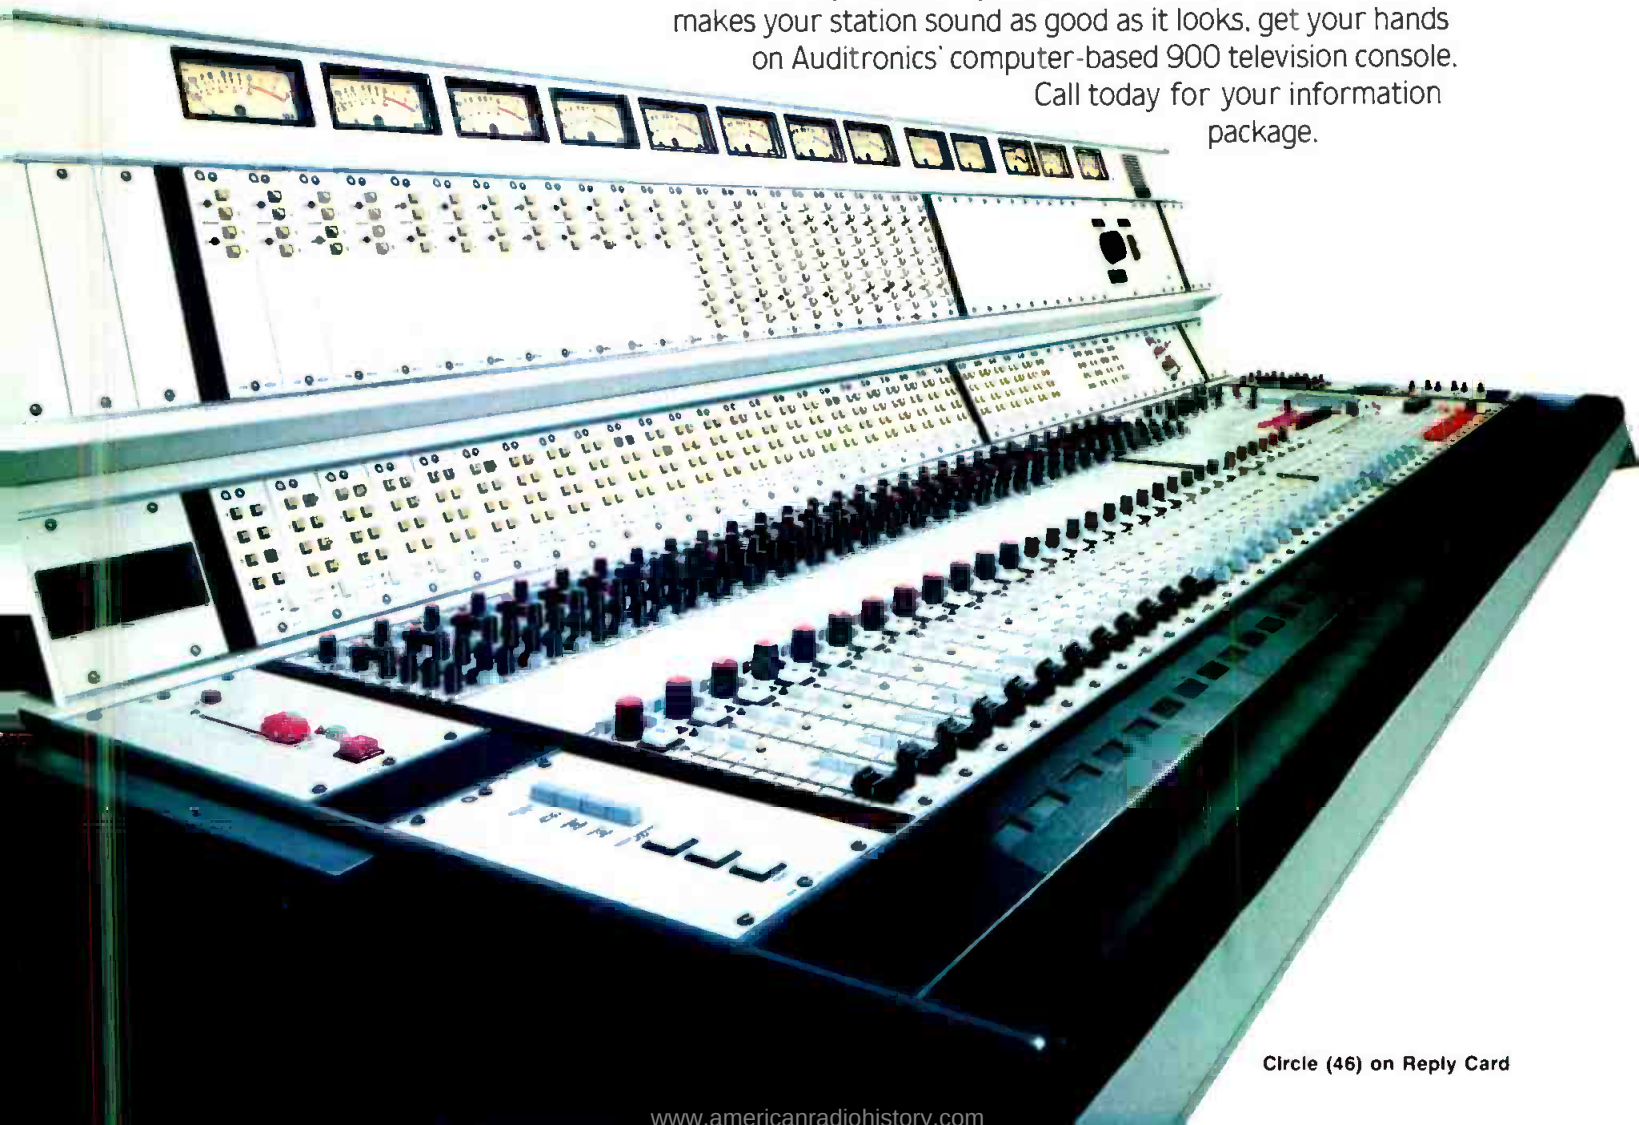

Circle (46) on Reply Card

may communicate with a number of workstations, or desktop computers may be connected in a local area network (LAN). The modem makes it possible for desktop computers in one location to communicate with desktop computers at the

transmitter site or at other remote locations.

If a number of desktop computers are interfaced in your broadcast station, it may be necessary to assign different levels of authority to each desktop computer, depending upon what department it is located in and who uses it. Protection against unauthorized control should also be part of the control system. Most systems accommodate this by using systems of callbacks and passwords.

An economic issue

How far a facility may want to go in the automated control of equipment is a matter of economics. The facility is likely to have a large capital investment in equipment. Much of this equipment may have been around for years, and may work too well to throw out. Automating older equipment so it can be controlled efficiently may be one of the industry's biggest challenges.



The ability of small computers to operate multiple tape machines has led to a new generation of editing systems. This user interface displays images from source and record decks, as well as giving visual representations of audio tracks. (Photo courtesy of Avid Technology.)

The value of automation likely will depend on the cost of going without it. The station that can reduce costs by being more efficient will probably not be as motivated as the station that is taking a severe beating because of excessive make-goods. It may be desirable to replace some

equipment that otherwise is in good condition, for no other reason than to improve control and automation. On the other hand, it may make sense to hold back on replacing older equipment that works well. In this as in so many areas, the bottom line is the determining factor.



BIRD WROTE THE BOOK ON RF POWER MEASUREMENT FOR THE BROADCAST INDUSTRY. NEED OUR LATEST EDITION?



- ▼ **THRULINE®**
RF Directional
Wattmeters
- ▼ Line Sections,
Directional Couplers
and Samplers
- ▼ **WATCHER®** RF Power
Monitor/Alarms
- ▼ Digital High-power RF
Calorimeters
- ▼ **TERMALINE®** RF Absorption
Wattmeters

- ▼ **TERMALINE®**
Coaxial Load
Resistors
- ▼ **MODULOAD®** and
ECONOLOAD® Coaxial
Load Resistors
- ▼ **TENULINE®** Attenuators
- ▼ All needed accessories including carrying cases, adaptors, connectors, cable assemblies, batteries, dollies

who else but

BIRD

30303 Aurora Rd., Cleveland OH 44139 U.S.A. • (216) 248-1200 • TLX: 706898 Bird Elec UD • FAX: (216) 248-5426
 WESTERN REGION OFFICE: Ojai CA • Phone: (805) 646-7255
 © Copyright 1991 Bird Electronic Corp

Circle (47) on Reply Card

Q102-6


VIDEO PRODUCTION & PACKAGING SUPPLIES

Immediate Shipment • Competitive Pricing


Ask for our Free Catalog



Boxes




Video Cassettes



Albums



Slip Cases



Mailers

PolyQuick

1243 Rand Road Des Plaines IL 60016
 Phone: (708) 390-7744 Fax: (708) 390-9886

Circle (48) on Reply Card

Any microphone you own is now wireless.



The ingenious H185 "plug-on" transmitter converts any hand-held, shotgun, lavalier or boundary layer microphone with an XLR connector to wireless operation. Constructed of durable machined aluminum, the H185 is built to thrive in the tough world of broadcast. Shock-mounted crystals minimize breakage caused by dropping or careless handling. A self-adjusting battery compartment accepts any alkaline battery. A precision, spring-loaded microphone coupler assures a secure, noise-free fit with any XLR jack. Build-in LEDs provide accurate audio level monitoring and battery status information.



For television ENG . . .

The compact CR185 receiver was designed for "on-camera" use, and is the perfect match for the H185 for ENG and EFP work. Narrow band filtering, high sensitivity and high intermod rejection make the CR185 receiver the best in its class. Audio output is balanced via a rear panel XLR jack. The CR185 operates from an alkaline 9 Volt battery or external 12V DC with either polarity. This is the receiver that will keep working when the others fail.

For radio station remotes . . .

Two standard sized receivers are available for use with the H185 in the studio or in remote locations. The R185 receiver combines a "bullet proof" front-end with narrow band crystal filtering and ultra-stable oscillators for unmatched sensitivity, selectivity and stability. The DR185 is a dual receiver diversity design utilizing two R185 receivers in a maximal ratio combining configuration for the most effective reduction of drop-outs available. These receivers operate from 110V AC or 12V DC and will perform reliably in the most difficult RF environments.



Lectrosonics wireless systems are presently in use at hundreds of television stations across the US and have become the standard choice of motion picture sound mixers everywhere.

Call for more information!
800-821-1121



LECTROSONICS, INC.

581 Laser Rd. NE • Rio Rancho, NM • 87124
(505)992-4501 • FAX(505)892-6243

Made in the USA

Circle (58) on Reply Card

www.americanradiohistory.com

Audio console automation for broadcast

By Brad Harrison

With the variety of automated systems working their way into many aspects of today's broadcast facilities (video cart libraries, routing switchers and newsroom systems), it seems natural for automation technology to arrive in the audio facility as well.

Audio console automation and the advantages it offers a broadcast facility have only recently come of age. Recording studios and video post-production facilities have been using audio mixing consoles with some form of automated assistance for more than 10 years. Until recently, however, most available systems were constrained in two critical areas that severely limited their use for live broadcast operations. First, most systems relied on a time-code reference. Second, most systems only controlled channel faders and muting.

In order for any form of automation to be useful in live applications, it must be able to work without any external

Harrison is Western regional sales manager for GLW Incorporated.

For automation to be useful in live applications, it must work without any external time-code references.

time-code references, and it should offer more comprehensive control of console functions.

Special requirements of broadcast operations

In the recording or post facility, the engineer relies upon the automation system for making dynamic mix changes. The bulk of the operator's time is spent updating or fine-tuning these instructions until the proper balances and timings are achieved.

In contrast, the bulk of a *broadcast* operator's time is spent in preparing the

console *setup* for a live production. Much effort is expended in arranging the routing for the main program feed and, in many cases, setting up complex and tedious mix-minus backfeeds to remote sites. Furthermore, a broadcast may include several different setups that cannot be completely preset before air, but only checked and noted for later resetting during the broadcast. This is especially true in large-scale programs when input or output buses must be reassigned while the show is in progress, because there aren't enough on the console to delegate separate ones to each source or output need in the broadcast. Typical situations of this kind might include election or other special-event coverage.

In live broadcast applications, everything is based on scenes or combinations of scenes. An automation system must work within these parameters in order to have any relevance and impact on the efficiency of live broadcast productions. It should allow the engineer to create and manage the complex audio setups that are frequently required today.

For maximum versatility, such a system should be able to operate dynamically, following one or more time-code reference standards, or in a "snapshot" mode in which preset configurations are instantly recalled by the operator when required during a live broadcast.

The bulk of a broadcast operator's time is spent in preparing the console setup for a live production.

Advantages of computer control

Designing such an audio mixing console automation system to operate within a desktop computer environment is also wise for operational and cost-effective reasons. Furthermore, the console-to-computer interface can be designed to use one of the popular high-speed databus systems used by these computers.

Ideally, in the "snapshot" mode, the computer should have the ability to "save" and control static console parameters, such as bus routing, input status, auxiliary send levels, audio processing settings (EQ and dynamics), panpot positions, channel muting and channel fader positions. An alphanumeric "slate" for each channel should also

Camera cable information from the company that knows best...Mohawk!

Mohawk offers superior broadcast camera cable and a free, newly expanded camera cable and connectors information kit!

If the job demands flawless broadcast transmission, order the best cable—Mohawk. Count on Mohawk's quick response to assembly orders and repairs to save you precious time.

Our expanded product line features:

- Ultra-flex VTR cable assemblies for Hitachi, Ikegami, Panasonic, Sony and others
- Slimline studio camera cables
- Waterproof, high strength three-piece connector design
- Customized lengths

Mohawk's entire team of engineers, technicians, and sales and service professionals are committed to providing product and service excellence. Our strict performance standards exceed even industry requirements.

Get your information from the reliable source! Mohawk's new edition of the TV camera cable and connectors information kit is available free. Just call or write Mohawk today!

MOHAWK

Wire and Cable Corporation

9 Mohawk Drive • Leominster, MA 01453 • (508) 537-9961
Toll free: 1-800-422-9961 • In MA: 1-800-642-9961



Circle (50) on Reply Card

Swiss Family **NEUTRIK**

Europe's most innovative audio test equipment is the newest in the U.S.A.



The value packed 3000 Audiograph Modular System.

Capable of a wide variety of audio measurement tests for broadcast, manufacturing or studio applications. Hard copy results are provided by the 3000 Audiograph's precision chart recorder. Over 2500 units in use world-wide, everyday.



The Neutrik TT402A Audio and Transmission Test System.

A standard among European broadcasters. Capable of delivering a vast array of audio test data via finger tip front panel buttons or through user-friendly computer software. Options available put this instrument at the top of the class.

Introducing the new A1 Audio Test System.



The A1 audio test system is the only instrument providing the capabilities of 7 separate pieces of equipment: sweep generator, level frequency, cross talk, noise, distortion, wow and flutter, curve tracer and an audio measurement oscilloscope. Communication and hard copy available through RS232 interface or centronics port. Accuracy and reliability that is portable for the audio lab, broadcast, manufacturing, service and studio user.

High quality Neutrik test systems are serviced in the United States and backed with a 1 year warranty.

Meet your audio testing needs accurately and in budget with Neutrik.

NEUTRIK

USA, INC.

CONNECTORS
AUDIO TEST SYSTEMS
INFOMATIC SYSTEMS

Neutrik AG • Im alten Riet 34 • FL-9494 SCHAAN • Fürstentum Liechtenstein • 011-41-75-29666
Neutrik USA, Inc. • 195-S3 Lehigh Ave. • Lakewood, NJ 08701 • Phone: 908-901-9488 • FAX: 908-901-9608

Circle (51) on Reply Card

www.americanradiohistory.com

be included, entered from the computer's QWERTY keyboard. Large quantities of these stored settings should be permitted without requiring excessive data storage, and recall/reset should be rapid.

In a dynamic mode, such static settings could be recalled from time-code locations (written "on the fly" in real time or assigned to a time-code address off-line), or full dynamic, real time control of all functions could be exercised, including sweeping parameters. In this respect, the system functions like a recording studio or post facility automated mixer, but preferably with control of all the previously mentioned operations.

Virtual vs. hard controls

The divergence of opinion that exists in the digital audio workstation world also comes into play for broadcast console automation. (See "DAWs Diversify," August 1991). If console control features (knobs, faders, switches and LEDs) can be displayed in an animated (virtual) control surface on a computer's display screen, this might eliminate the need for a large and expensive actual (hard) console. But for real time and non-automated applications, a hard console is still useful, if not essential.

A middle ground may be drawn, however, in which a large number of inputs

A system should be able to operate dynamically or in a "snapshot" mode.

and outputs may be accommodated in a mixing system, but without installing that number of actual I/O modules on the hard console. A hard module may be assigned to control and write automation data for a virtual channel. This saves console real estate and expense, but maintains the ability to perform moderately sized, non-automated mixing or live, hard console updating of recalled settings during a "runaway" broadcast.

Module complexity and size can also be reduced by handling some functions, such as signal routing, in only the virtual display. Realistic graphics can minimize the disturbance to an operator of this new approach, and manipulation of these controls can be performed with a pointing device, such as a mouse or trackball.

Actual channel status and control settings can be fully displayed in real time on the screen for any channel. Proces-

sor settings could be displayed in an even more graphically representative fashion, such as a frequency response plot for EQ or an I/O transfer curve for dynamics processors.

However, any control change made by the operator using the virtual display must occur without delay, on screen and in audio.

Extensions


A supplementary element could allow editing of mix data so that static snapshots could be rearranged in sequence, different dynamic mixes could be merged, or individual control settings (such as EQ) could be "cut-and-pasted" or copied to another channel. Global setting changes could also be made in this context.

Finally, the system could extend its reach beyond the confines of the console itself to include external (but related) devices, such as a routing switcher, thereby allowing integrated (or stand-alone) control of signal flow to and from the mixer.

The availability, flexibility and cost-effectiveness of systems incorporating some or all of these concepts today makes their exploration worthwhile to any prospective audio mixing console purchaser.

||:~:~))||

GETTING SOAKED? GET A MARINER!

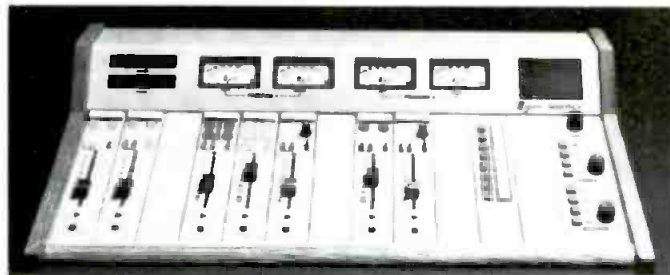

The MARINER On-Air Console

- Waterproof Switches & Pots
- Works while dripping wet
- 6, 12 or 22 Mixer Modular Frames
- 3 Styles of Mixers
- 6-Button Integrated Machine Controls
- Connections via QCP® Terminal Posts
- Optional Clock, Timer & Backup Supply
- Built for Reliability & Low Service

Logitek

When it has to
work right!

Call 800-231-5870 for your nearest Logitek Dealer.
(Alaska, Hawaii, Canada: 713-782-4592)

Circle (52) on Reply Card

ZERO STANTRON CATALOG

Pre-Assembled Video/Security Furniture & Accessories

- CCTV Consoles
- Editing Consoles
- Security Consoles
- Equipment Racks
- Modular Work Stations
- Module VTR Racks
- Dubbing Racks
- Monitor Bridge Consoles
- Pre-designed or Design Your Own Console
- Accessories



Call Toll-Free:
1-800-821-0019

**ZERO
STANTRON**

777 Front Street
Burbank, CA 91502
FAX: 1-818-841-8892

Call me, I'm interested. Circle (98) on reply card.
Send literature. Circle (99) on reply card.

PANASONIC TAKES M.A.R.C. INTO THE DIGITAL AGE.

Panasonic won an Emmy for the M.A.R.C. Cassette Library System, but that didn't keep us from improving it.




Panasonic's M.A.R.C. now has:

- A multi-user, multi-tasking operating system (Santa Cruz Operation SCO Xenix);
- A new multi-user Data Base Management System (Informix);
- An interconnected Cassette Dub Station for quick and easy spot dubbing and program screening;
- Multi-element cassettes allowing program playback and multiple spots per tape with no change in software;
- Up to seven remote terminals to access M.A.R.C. application software via an Ethernet TCP/IP LAN.

With the new Panasonic Half-Inch Composite Digital VTRs, M.A.R.C. gives today's demanding broadcaster unequalled quality, performance and reliability at a fiscally responsible price.

Cassette interchange is assured—across the room or across the country. The digital system's new 8-14 channel-coding format with its edit guardband breakthrough,

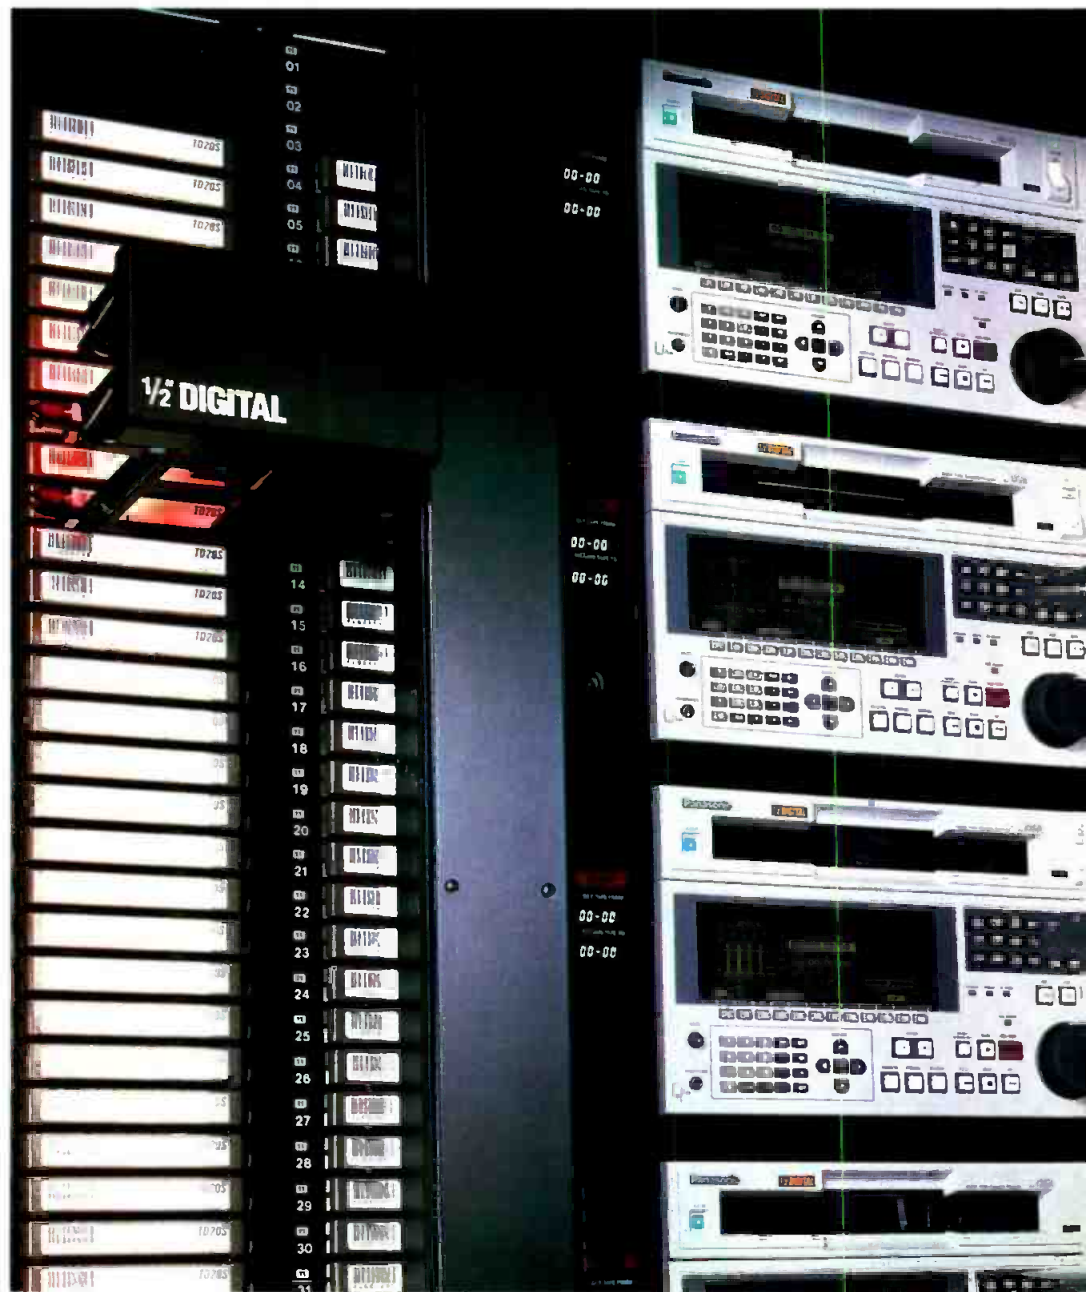

solves the problem of guardbandless recording associated with D-2. Advanced error correction/concealment techniques, full field data shuffle and four individually editable audio channels add up to outstanding performance.

Find out what many broadcasters already know: 40,000 spots a day prove Panasonic's M.A.R.C. a winner, and real winners keep on getting better.

Panasonic

One Panasonic Way, Secaucus, NJ 07094.
For more details call: 1-800-524-0864

The marks Ethernet, Informix, SCO, Santa Cruz Operation and Xenix are the property of their respective owners.

Circle (53) on Reply Card

www.americanradiohistory.com

The on-line/off-line interface



The rapid growth of off-line editing systems is beginning to revolutionize the post-production industry.

By Bill Ferster

Instead of wasting time making editing decisions at expensive on-line facilities, more producers now edit off-line. They can then enter the on-line environment to perform the tasks they do best there — graphics, effects, compositing and titling.

Working off-line allows the editor to be creative without the financial pressure of the ticking clock. Off-line work also affords the luxury of editing multiple versions to see which one works best or to obtain approvals.

Using off-line facilities can decrease the cost and increase the quality of video production for broadcast. This article reviews some of the techniques used to move between off-line and on-line environments.

The nuts and bolts of off-line

The off-line process works as follows: First, the editor or an assistant logs the tapes. *Logging* serves two purposes: 1) It identifies good takes and footage; and 2) it links the good takes to their respective time-code numbers. Logging used to be a tedious process. However, a new generation of microcomputer-based products speeds the task considerably. Typically, these systems produce a data file with the time-code number shown in one column, and footage descriptions in another. The operator enters time code automatically

by simply striking the space bar or a function key. The operator then types the description on the keyboard. The result is a neat, legible log that is produced quite rapidly. The time-code numbers may even transfer to some off-line systems. (See Figure 1.)

Following logging, an editor assembles a *rough cut*. Similar to a rough draft in the literary world, this first cut gives an idea of how the finished product will look. It also serves as a cross-check to make sure that all the needed material is usable and at hand.

After picking the shots, the off-line system produces its final output — an edit decision list (EDL). The system may also produce an edited tape good enough to use in some applications.

The next step is finishing in the on-line suite. Using the EDL and the original source tapes, the expensive equipment in the on-line suite re-creates the edits. This is an opportunity to use whatever digital effects, supers and elaborate transitions the on-line facility has to offer.

The EDL, placed in the hands of a good editor at a well-equipped facility, is the reason working off-line saves money. Developing an EDL in a low-rate off-line suite gives producers the chance to make their decisions before they come to the high-dollar suite. Furthermore, the off-line tapes can be submitted for approval before committing to the expense of an on-line version.

About off-line systems

An off-line system can be as simple as two VHS decks and a device that burns in time code. It can also be as elaborate as one of the powerful digital editors, which allows word processor-like manipulation of pictures and sound. Many systems fall in between as well.

Systems fall into two broad camps: those that use computers to control tape machines or disc recorders, and those that digitize and process video internally. The machine control systems are the most prevalent, although advances in the digital compression of video signals are making in-computer editing more cost-effective. (See Figure 2.)

Taking the EDL uptown

Regardless of how the EDL is created, the goal is to re-create the edits using the equipment in the on-line facility. Users must transfer the list of edits into the editing equipment used by the on-line facility. Because this process has become more commonplace, most experienced on-line facilities have gained considerable practice accepting lists created by various off-line systems.

Fairy fingers

Once the list is in the on-line system, the show can be "auto-assembled" with minimum operator attention, except for the changing of reels. This process can be simplified by paying attention to the order in

Ferster is president, Editing Machines Corporation (EMC), Washington, DC.

NEW

Live Production



On-air PRODUCTION


The RVS 630 combines the power of 30 video inputs, the flexibility of two 4-bus Multi-Level Effects Systems (MLE), totally integrated DVE control, the Ross Downstream Multi-Keyer, and complete switcher set-up storage, with the convenience of uncomplicated operation provided by the PGM/PST busses.

In addition to the power and versatility of the 630, the compact size makes it ideal for mobile installation. The 47 3/4" x 27 1/4" control panel stands a mere 4 3/4" above the desk ... and, the supportive electronics take up a minimal 10 R.U.s.



RVS 630

... handle any On-Air or On-Location production with confidence.

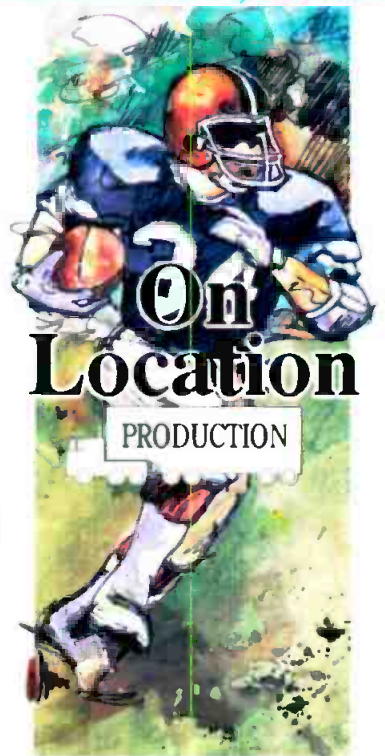

For a detailed Installation and Planning Guide
call us today at **(613) 652-4886**



Ross Video Inc., P.O. Box 880, Ogdensburg, New York, U.S.A. 13669 0880
Ross Video Limited, P.O. Box 220, 8 John St., Iroquois, Ont., Canada K0E 1K0

Circle (54) on Reply Card

www.americanradiohistory.com

which you direct the edits to be assembled onto the master. There are three ordering schemes. In the simplest, edits perform in the order they appear on the list. Typically, this is in the chronological order on the master. As each edit is performed, the edit-

ing system will instruct the operator to pop in the proper cassette.

A slightly more complex editing sequence performs all the edits on a given source reel in order to minimize the time spent changing reels. The most complex,

yet fastest, method of assembly is to perform all edits in the order they occur on each source reel. This not only reduces time spent changing reels, but it also reduces search time.

Watching a program auto-assembly can

TIME CODE	SCENE:	TAKE:	COMMENTS:
00:09:23:15	3	01	CHERYL STAND-UP (GOOD ONE)
00:10:24:22		02	WIND NOISE
00:11:25:25		03	TRUCK WENT BY
00:12:27:03		04	GOOD
	4		
00:15:32:07		01	CHERYL POINTS; PAN UP CAPITAL STEPS
00:16:33:28		02	SAFETY (FASTER)
00:17:34:12		03	OKAY
	5		
00:22:35:15		01	CHERYL IN GOVERNOR'S OFFICE (OKAY)
00:24:36:24		02	AUDIO PROBLEM
00:09:23:15		03	SLAMMED

Figure 1. A sample printout from a tape logging system. Often, the scene and take numbers increment automatically. Time-code data transfers into the printout at the touch of a keystroke.

be quite disconcerting — the show does not build chronologically. Edits are placed on the system in seemingly random order. The program emerges only in the latest stages.

Sending it to the system

The EDL can be entered into the on-line system by one of three ways — typing it in by hand, reading it off a floppy disk or via a direct connection using a serial port.

Typing it in is the most tedious and error-prone means of transmission. Editors must work from a printed or hand-written list of the time-code numbers.

The most efficient way to transfer an EDL from the off-line system is through a floppy disk. To do this, the disk must be the proper size and format. Each on-line system has a unique format in which it will accept EDLs. It falls to the off-line system to produce a list in the proper language. Most on-line systems are capable of reading lists created in the CMX217 or CMX340

CONNECT THE DATS



...with Panasonic's new *Software Developer's Toolkit* and a couple of their SV-3900 Professional Digital Audio Tape Recorders. The possibilities are endless...

With this software, you can have simultaneous control of up to 32 machines per computer port. A touch of the mouse and you can search to *Absolute Time* on one machine, two machines, or *all* of your machines and be *frame accurate*. A tap or two on the keyboard and you can have over 237,000 cue points on a two hour tape.

This software gives you the control you need to do Duplication, Radio Station Automation, Effects Library, and much, much more!

It all starts with the right connections... So call THE DAT STORE —they'll connect you with the right machines.

2624 WILSHIRE BLVD. SANTA MONICA, CALIFORNIA 90403
213-828-6487 Weekdays: 9-6 / Weekends: 1-4 fax: 213-828-8757

THE DAT STORE
DIGITAL AUDIO TAPE

Circle (55) on Reply Card

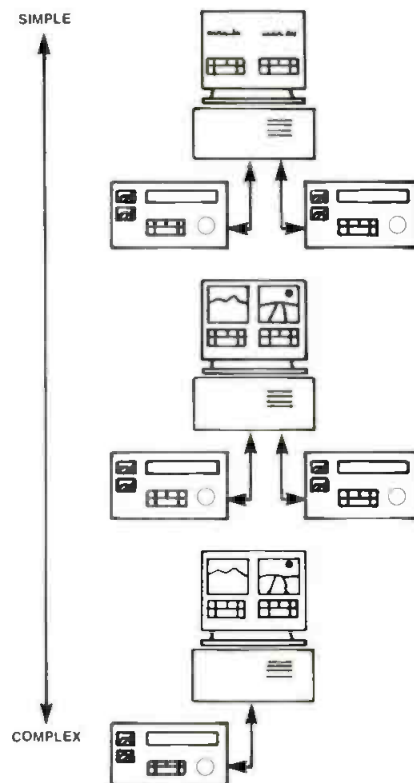


Figure 2. Different approaches to off-line system construction. The simplest systems use a computer to operate VTRs. More complex systems drive VTRs with a computer, but show a representation of the video on the computer screen. The most sophisticated and powerful systems digitize and process the video, or a compressed representation of it, in the computer itself.



Nature has its own
professionals of
sound and vision.



The wonders of sound and vision found in nature are hard to reproduce. In fact, if anyone has come close it's EEV.

Whatever your broadcast requirements, you'll find EEV has the technology to match. High-efficiency UHF Television Klystrons from 5kW to 70kW for Television Transmitters. A range of Broadcast Tetrodes and Vacuum Capacitors for AM and FM transmitters, and Leddicon® camera tubes to fit virtually every broadcast color camera available today.

Our experience is the key to technological leadership. Our manufacturing know-how ensures the highest quality and reliability. Above all, our professional dedication to our customers' needs makes us the natural choice of broadcasters the world over.

® Leddicon is the Registered
Trade Mark of EEV Lead Oxide
Camera Tubes.



EEV

Technology for the Broadcast Industry

USA: EEV Inc, 4 Westchester Plaza, Elmsford, NY 10523. Telephone: (914) 592 6050 or 'Toll Free' 1-800-DIAL EEV Telex: 6818096 Fax: (914) 682 8922
CANADA: EEV Canada Ltd, 67 Westmore Drive, Rexdale, Ontario M9V 3Y6. Telephone: (416) 745 9494 Telex 06 989363 Fax: (416) 745 0618
UK: EEV, Waterhouse Lane, Chelmsford, Essex CM1 2QU, England. Telephone: (0245) 493493 Telex: 99103 Fax: (0245) 492492

Subsidiary of the General Electric Company plc of England. **S&C**

Circle (56) on Reply Card

www.americanradiohistory.com

Sennheiser.



Still setting the standards.

Sennheiser's dedication to state-of-the-art technology, coupled with quality engineering, earned our microphones an Academy Award*. Sennheiser continues to set the standard in the industry, this time with the MKH 60 and MKH 70, our newest shotgun microphones. They display all the ruggedness that you need in audio production and the reliability that Sennheiser has become famous for.

Sennheiser. The first and last authority on shotguns!

Ask your Sennheiser Representative for a demonstration.

SENNHEISER

SENNHEISER ELECTRONIC CORPORATION
6 Vista Drive, P.O. Box 987, Old Lyme, CT 06371
(203) 434-9190 FAX# 203-434-1759
Manufacturing Plant: D-3002, Wedemark,
Federal Republic of Germany

*©A.M.P.A.S.®

formats. It is best, however, if the EDL is prepared in a format that is native to the system. There may be some subtle differences, such as the ability or inability to use letters in reel names, which may cause confusion. Contact the facility to find out

which formats its editor will read.

Older editing systems store EDL files on 8-inch floppy disks. This can be awkward and difficult, because 8-inch drives are not commonly available. More modern edit systems use the standard 3 1/2-inch floppy disks used on word processor computers, which makes interchanging much easier.

Different on-line systems require different disk formatting schemes. Do not confuse this with the EDL format discussed earlier. Three formats are commonly used — the CMX-RT11 format, used by CMX; the Grass Valley RT-11 format, used by Grass Valley; and the MS-DOS format, used by Sony and most other manufacturers. Most off-line systems have utilities for formatting and copying EDLs to disk in the correct format.

Sending it serially

If the on-line editor has no drives, or you are unwilling to purchase 8-inch drives to transfer EDLs at your PC, the EDL can be sent through a serial cable. The cable links the on-line computer, often at its paper-punch port, to the serial port of another computer that contains the EDL. Attempting this kind of EDL transfer can be a frustrating experience until all the bugs are worked out. But from then on, it is simple and quick.

A suitable cable must be obtained or built. Contact the manufacturers of the on-line system for a connection diagram.

The PC must contain a communications software package to transfer the EDL. Both the PC and the on-line system must be set up to transfer at the same parameters, such as baud rate, bits and parity. A baud rate of 1,200 seems to be the most reliable. Once communication is established, the on-line system is instructed to wait for an incoming EDL. The PC containing the EDL is instructed to send it to the system.

Building shows

Auto-assembly of shows created off-line can be a great time and money saver. There is a broad variety of off-line systems from which to choose. Using them frees editing personnel to concentrate on pictures and sound, not on moving VTRs.

1:7:~)))

We've Got A Screw Missing!



In fact we're missing two, and it represents a significant design improvement in our famous A3F and A3M audio connector!



Introducing the **NEW AA3 Series** from Switchcraft with a sleek, new streamlined look. And... *it's available in black too!*

Now, anyone who assembles or uses this well-known and relied-on audio connector will appreciate the many benefits incorporated in the new AA3 series.

For example:

- Only 1 screw instead of 3 means quicker assembly time and lower costs.
- No need for a special tool
- Solder cups are repositioned for quicker, easier access
- Clamp remains with connector, no screws to contend with, and features a fold-down tab for ground to pin 1.
- New design permits easy exchange of flex relief for color coding if desired
- New insert "Greenie" is even more resistant to chipping and wear for longer connector life.
- And as always you can depend on the rugged all metal construction to pass the "stomp-on" test.

Get "*real inside story*" from your nearest Switchcraft source.

Switchcraft

A **Raytheon** Company

5555 N. Elston Avenue
Chicago, Illinois 60630
312-792-2700
FAX (312) 792-2129.

(and...the A3F and A3M Series are still available too!)

What it was like shooting in

For all those cameramen who've ever been forced to compromise or even miss a shot because of tough lighting conditions, Sony has some good news. The BVW-400 Betacam SP® camcorder. Now even the most difficult situations will never leave you in the dark.

With a specification of F8.0 at 2000 Lux, the Sony BVW-400 is the most light sensitive video production tool



available today. It uses the Sony Hyper HAD Sensor,TM the latest development in Sony CCD technology. This remarkable device features an array of microscopic, light-magnifying On Chip Lenses which allow the BVW-400 to take advantage of virtually all available light.

The BVW-400's extraordinary light sensitivity lets you shoot with more creative freedom. For

low light before the BVW-400.

example, you can shoot an hour earlier and an hour later, so you can use more natural light. You can also shoot with less lighting equipment. Which means less set-up time, fewer hot lights, and less wear and tear on your talent. And in optimum lighting, the BVW-400 gives you the flexibility to shoot with greater depth of field.

But low light isn't the only area where the BVW-400 shines. It also gives you a sharp, clear image with over

700 lines of resolution and virtually no vertical smear. And it features genlock, center and safe zone markers, and a lightweight, one-piece camcorder body.

For more information on how well the BVW-400 performs in low light, call us at 1-800-635 SONY.

We think you'll find it quite illuminating.

SONY®

BUSINESS AND PROFESSIONAL GROUP

Archiving for productivity



New technologies make archiving productive and even profitable.

By Rick Lehtinen, technical editor

Two years ago, the governor of a neighboring state came to town and gave a press conference. He smiled for the cameras, then drank a big glass of local river water to demonstrate his confidence in the containment system at a defense plant located upstream in his state.

Five or six months ago, some local children brought in an unusual frog with an extra set of hind legs. They had found it along the river. A photographer shot the frog, and the piece ran as a parting shot in the late news one night.

On a hunch, the photographer introduced the children and their frog to his wife, a biology instructor at the community college. She was shocked. The next weekend she took her husband on a "fishing" trip and they gathered water specimens from up and down the river around the plant. It took awhile to perform the analyses, but the preliminary results strongly implicated the plant.

Last week, a correspondent working a different story chanced upon an unreported business relationship between the governor's brother and the plant.

Sensing he was onto a story with Murrow award potential, the news director pulled out the stops. He watched over each phase of the project personally. He planned to break it in a big way the following week, at the start of the sweeps.

Things went well until this morning. The photographer's wife called to say her department head had told the Dean of Instruction about her field trip — and that

she now was locked out of the lab and had been instructed not to talk to anyone about her findings. She was told they would call a press conference in a few days. Until then, she had to keep quiet or lose her job.

All fury broke loose when the news director got the word. The deadline changed to that night. He wanted the scoop badly, and he saw his chance slipping away. He knew that the dean was a close friend of a reporter at a rival station.

Because the governor's visit occurred the same day one editor's son was born, there was no trouble finding the date and locating his footage. But what to do about the gagged scientist? He would need the frog footage, but that producer had since quit the station and moved away. The needed video was somewhere on a shelf containing 60 cassettes. To shuttle through them all would be futile, because there was not enough time.

*The news director was furious, "I will not lose this story because you clowns can't find some footage of that *\$%@ frog! I'll hire a staff that can!"*

No one likes to miss an opportunity because something couldn't be found when it was needed. In a fast-paced business, such as news, quickly getting your hands on a critical item may be a job-saving skill. But footage is hard to file. Each broadcast covers so many topics that newscasts become difficult to catalog. Without catalogs, archives are useless. As a result, facilities may miss many chances to enhance the

interest and value of their news programming — or to save a big story when the unexpected happens.

This article will describe how some new technologies can help stations get top value from their archives. By making some moderate investments, facilities can quickly and easily find anything they have on file.


Meet the culprit

The problem of archive management, at its root, is the cryptic nature of videotape. Unlike a piece of film, you can't tell anything about what's on a tape by direct examination. Furthermore, all cassettes look pretty much the same. Even if tapes are uniquely identified with reel numbers, this gives no clue as to their content.

A felt tip pen can be beneficial. If you write "Noon news, July 25, 1991" on the reel, it will give you some idea about the tape's contents. However, this merely categorizes the contents, it doesn't declare them. There needs to be a way to describe accurately what's on the tape, like a magazine's table of contents. Such labels are available, but in high-pressure jobs and times of tight budgets, who is going to fill them out? So, the archive remains a wasteland.

New direction

Stations can turn the corner on archiving when the staff adopts the view that archiving is a productive activity, not a chore. Think about it — all the footage in

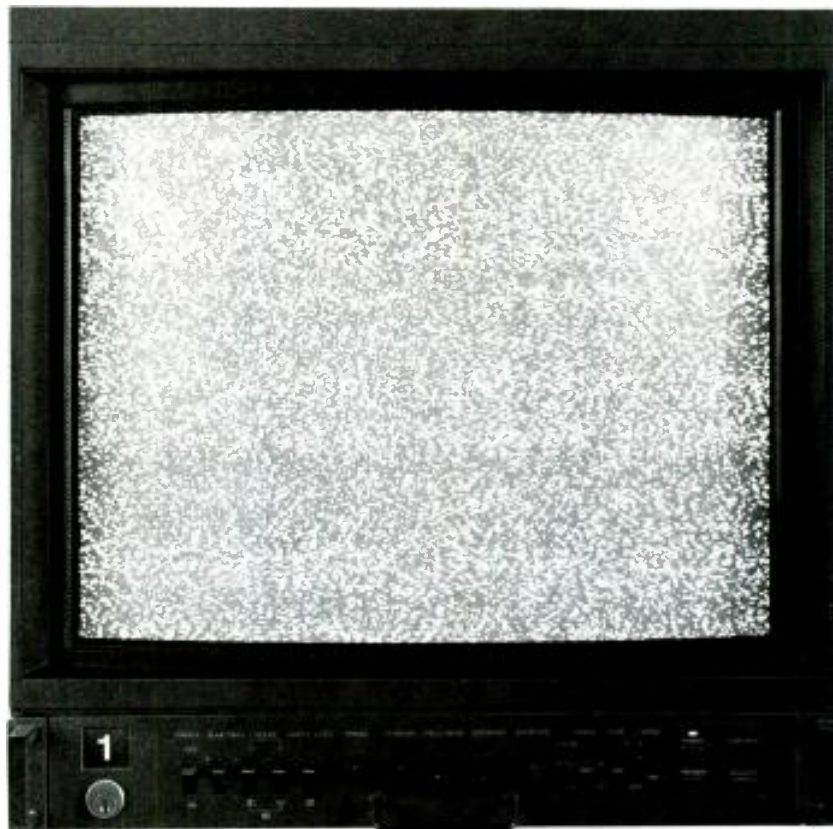

Some HPA Manufacturers Promise Great Service... Get The Picture?

At MCL, we don't just promise great service, we guarantee global technical support 24 hours a day, seven days a week, 365 days a year. MCL is committed to customer satisfaction. That's why we virtually guarantee 24 hours maximum parts replacement (in or out of warranty), and why we provide round-the-clock access to MCL personnel to aid in resolving installation or servicing problems.

We also conduct up to 20 production and quality tests and 10 production and quality inspections per

unit to assure unsurpassed quality. And from seven worldwide centers, we'll be there to help you if you need us...we guarantee it.

Let 30 years of experience work for you.



MCL/INC.
501 S. Woodcreek Road
Bolingbrook, IL 60440-4999
708-759-9500
Fax: 708-759-5018
Circle (59) on Reply Card

MCL provides 24-hour, seven day a week service and maintenance support throughout the world. 24-Hour Emergency Service Number (312) 461-4536

an archive has been bought and paid for. The shooting and editing are finished. In the case of newscast archives, the material has all been copyrighted and has passed the critical test of having been made public. (Many stations refuse to archive field

right contents in it. Laboriously creating detailed labels — if it gets done at all — may be unsuccessful, because the descriptions will probably be inadequate. Too many stories will have similar names or slug lines. Also, it will be hard to search

underlying news stories. If you search the scripts, the tapes will follow.

Newsroom computers

This highlights the importance of a computerized newsroom. Not only does it en-

tapes, because off-the-record comments and activities of taped individuals may present liability problems if inadvertently used later.)

After establishing the value of the archive, the problem remains in finding the

the archive by subject. This is an important capability. It allows the archive to contribute ideas, not just footage.

Perhaps the key to unlocking a news archive is realizing that the tapes are merely picture and sound representations of the

able reporters to rapidly incorporate information from many streams, such as national news wires, it also simplifies pulling in items from the past. The computer simplifies the search backward through time, combing through mountains of old scripts effortlessly.

Again, users should ensure that their systems can search a script archive by subject. This increases the reporter's access to materials, compounding the archive's value.

Some newsroom systems provide this capability, using keyword searches and other techniques. Other systems may need add-on hardware that is currently available. Fortunately, this is the age of personal computing, and such add-on systems do not need to be terribly expensive.

Electronic picture file

Effective search routines may locate desired text information, but how can a user quickly examine the footage that accompanied the script? After all, it takes time to shuttle through a box full of tapes. Computers can help once again. New technologies make it easy to store a representation of the archive video in a rapidly accessible format. One PC-based system uses a recordable laserdisc player to store one frame of video every few seconds. Program audio is stored in its entirety. The system uses a digital compression process that writes audio data to the disc as a video signal. Stored this way, a year's worth of newscasts fit onto two or three discs. (See Figure 1.)

In use, the operator scans the script archive using powerful keyword searches. A list of slug lines containing the keywords comes to the screen. Scanning up and down with the arrow keys, the operator can select one that seems likely by touching a function key. The script segment then pops into view, with the keywords highlighted. If the segment isn't right, the operator returns to the previous screen and picks a new slug line. If it looks promising, the operator touches a second function key, which accesses the laserdisc and plays the segment. This may give the operator all the information that is needed. If a reporter then wishes to use the story footage in the present piece, the tape can be fetched from the archive.

In the future

In fact, the time is approaching when newscast pictures and sound will merely be special extensions of the basic script



EMFT TV DEMODULATOR

Completely Transparent To Your Signals

You can rely on the EMFT to demodulate your TV signals with complete fidelity . . . without instrument-induced aberrations. Why rely on equipment based on obsolescent technology? The EMFT utilizes the most modern technological design for greater versatility, reliability and operating convenience.

It's Simple To Use

You'll find the controls you normally use for testing and signal analysis conveniently located on the front panel. A built-in speaker facilitates setup, and LEDs enable you to verify your set conditions at a glance.

Full Coverage With No Plug-ins

Channels are digitally selectable with synthesizer accuracy—over the full UHF, VHF, or CATV bands—without the need for module changes and recalibration. Compensation for carrier offsets up to 100 kHz is fully automatic. Switchable SAW filtering ensures adjacent channel suppression, and an analog input meter verifies tuning accuracy.

More Features

The EMFT features selectable synchronous or envelope detection—with separate IF, mono audio, wideband stereo audio, video, and quadrature (Q) outputs. You'll appreciate the convenience of the Q output for intercarrier phase modulation measurements and the built-in stable zero reference for video level adjustments and residual carrier measurements. An IEEE-488 bus interface is available for complete automation, remote control, and interface to other testing devices.

*Compare the features—
and compare the price. The EMFT is surprisingly affordable!*



See Us At SBE '91
Houston

See Us at SMPTE '91
Los Angeles



ROHDE & SCHWARZ INC. 4425 Nicole Drive
Lanham, MD 20706—Tel: (301) 459-8800

In Canada: Rohde & Schwarz Canada Inc., 555 March Rd., Kanata, Ontario, K2K 1X7—Tel: (613) 592-8000

Outside North America: Rohde & Schwarz Headquarters, Mühldorfstr. 15, W-8000 München 80, Germany
Tel: (089) 41-29-0

Circle (41) on Reply Card

MAJOR EVOLUTION

IN METAL TAPE PERFORMANCE ...

maxell. ceramic **ARMOR**

Metal Particle Tape

Ceramic armor layer
Pure iron oxide

INCREDIBLE PERFORMANCE

The breakthrough Ceramic Armor Technology of Maxell Metal Tape provides dramatically improved stability, greater archival capabilities, lower bit error rates, and better head-to-tape contact in Betacam SP, D-2, HDTV and DAT.

HOW CERAMIC ARMOR WORKS ITS MAGIC

Because the ceramic armor layer is second only to diamond in hardness, overall particle strength is remarkably increased. And by adding this ceramic armor layer at the first stage of magnetic particle production, Maxell produces extremely strong needle-shaped particles free of deformation and breakage during processing. The ceramic layer also insures each particle's resistance to oxidation, and greatly improves the tape's surface durability.

PLUS

Our high-performance cross-linking binder system and extremely precise cassette mechanism, built to micron-level accuracy, assure stable tape travel during editing, repeated playbacks, and even in the severe environments of ENG and EFP. And a conductive back coating prevents static build-up which helps reduce dust and debris.

SEE FOR YOURSELF

In fact, Maxell Ceramic Armor Metal Tape is so advanced, you really have to see it for yourself to fully appreciate its unmatched performance and reliability. For an eye-opening demonstration, call your Maxell representative.



maxell.

Maxell Corporation of America, 22-08 Route 208, Fair Lawn, NJ 07410, 1-800-533-2836

Circle (61) on Reply Card

www.americanradiohistory.com

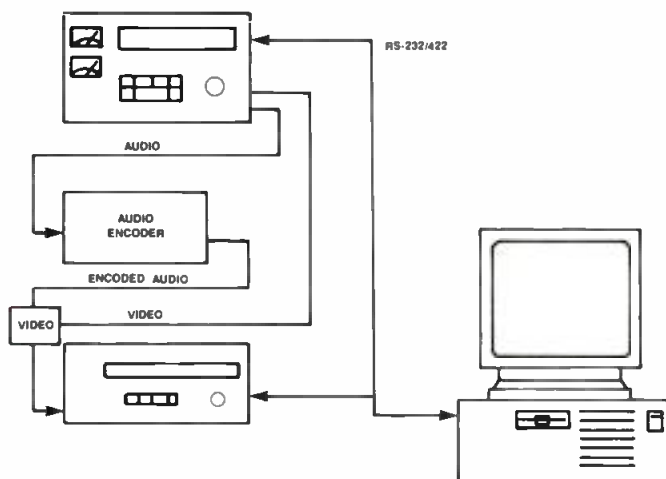


Figure 1. One archiving system transfers a representation of taped material onto a laserdisc recorder for archive use. Operators can search a script archive using keywords. They can then call up the laserdisc version of the story to see if it meets their needs before pulling the actual tape from the archive.

file. Editing and manipulating the pictures and sound may become a process akin to word processing, and use the same equipment. Working a good visual into the story will be a writing process similar to working in a good quote. In computer jargon, this process is called *multimedia authoring*.

Mining operations

Such systems can make the archive ac-

cessible from the day they are installed moving forward. Also, it isn't hard to build archive discs moving backward to the earliest point at which scripts were computerized. But what about pre-existing archives, or cataloging material on tapes for which there is no script? Is there a way to determine what is on a tape and make that information useful in an expedient fashion?

Fortunately, yes. A new family of *tape*

loggers allows users to quickly list the contents and time-code numbers of a tape by hooking up a VCR to a PC. (See "The On-Line/Off-Line Interface," p. 78.) The data files created by these systems can be imported to many archive systems.


A second development is the use of PC-based systems to track the location of tapes, as well as keep a detailed log of tape contents. One such system uses bar code labels to identify each tape. Operators scan the tapes in and out of storage locations. This way, when a given tape can't be found, it is easy to learn who had it last and where. Such systems are also useful for controlling the inventory of new tapes. (See "Automated Station Libraries: A Systems Approach," April 1991.)

As archives increase in their newsworthiness, it is likely that more new products will appear to help news entities make good use of them. Hopefully, such technology will increase the productivity of archiving, and will appease even the sternest news directors.

Acknowledgments: The author wishes to thank A. Owen Smoot, KSL-TV Advanced Technology Group, Salt Lake City; and Irene Nesbit, Nesbit Systems, Princeton, NJ, for their help in preparing this article.

! : ? :)))

Whether your requirement is **LARGE** or **SMALL**,
there's a Harrison teleproduction console just
for you.

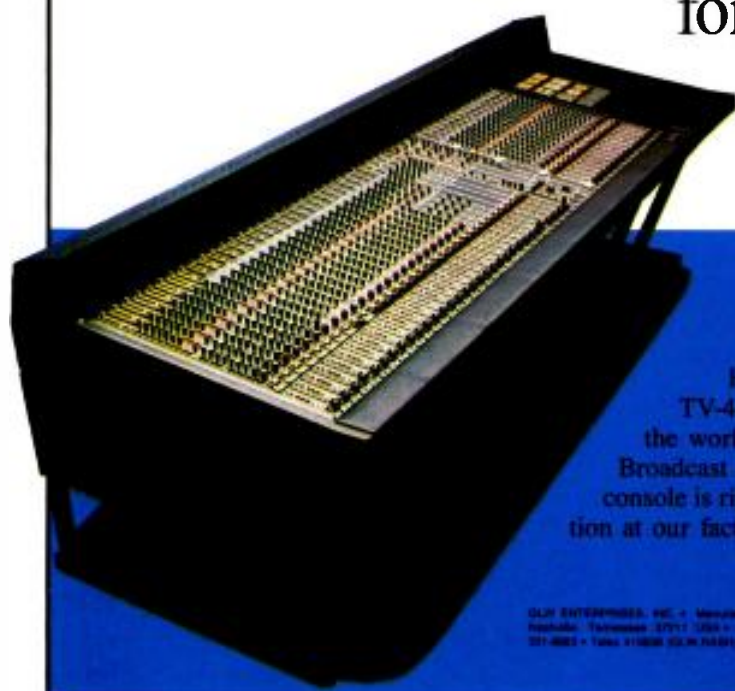

Harrison's Series Ten B.TV-3,
TV-4 and Pro-790 are found all over
the world in facilities that are leading the
Broadcast Audio Revolution. Call us today to find out which
console is right for your facility. We'll gladly arrange a demonstra-
tion at our factory or at your facility.

GLW ENTERPRISES, INC. • Manufacturer of Harrison Consoles • 407 West Street,
Nashville, Tennessee 37211-1255 • Telephone (615) 251-6800 • Telex 98710
251-6800 • Telex 810000 GLW NASV

Harrison by GLW


Circle (62) on Reply Card



B-rolls



Production Switchers

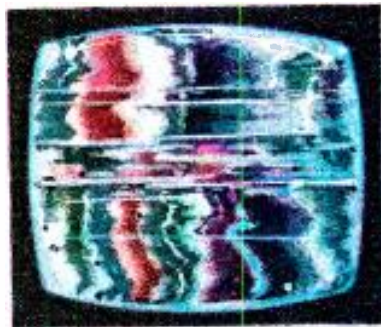

Fuzzy Freeze Frames



Separate Edit Controllers



Multiple Source VTRs



Costs

Things you can cut down on in a room with a VUES.TM

If you want to be on the cutting edge of digital post-production while cutting down on costs, perhaps it's time to invest in a room with a VUES.

This high-powered digital editing system from NEC consists of a single rack of equipment: a computer-control workstation, the NEC DTW-102 wipe generator, a background color generator/shadow processor, a 20×10 routing switcher, NEC VUES interface, and the real heart of the system, the NEC VUES VSR-11 solid state recorder.



With VUES, all editing functions—from wipes and complex mix/effects to multi-layered composites—are performed in the VSR-11. Best of all, you only need to use one source machine, one



channel of character generator and one channel of digital effects to accomplish all of these tasks. And with the use of the VSR-11's DRAM memory, each source can be used indefinitely without ever performing a B-roll.

The compact design of VUES requires less space, less cooling and less maintenance (because there are no moving parts). Plus, because VUES utilizes a computer-control workstation, there are no expensive production switchers or edit controllers to buy.

If you would like more information about the finer points of VUES, please call us toll-free at 1-800-323-6656.

NEC

SBE show preview



SBE convention convenes in Houston.

By Skip Pizzi, technical editor

Broadcast technology will launch into a new and critically important era at the 1991 SBE National Convention and *Broadcast Engineering* Conference, Thursday through Saturday, Oct. 3-5. Houston, dubbed "Gateway to the future of technology," is a fitting site for broadcast engineers to take a long look forward at the many changes in store for their industry.

More than ever, technological change is dramatically affecting the careers of broadcast personnel. Therefore, anyone involved with broadcast technology today is likely to find something of significant value at this year's conference.

Beyond the overall assessment of the current state of broadcast technology and regulation scheduled for the first day of the conference, specific subjects to be explored and updated during the rest of the program include frequency coordination, radio and TV RF systems, digital radio, facility automation, problem solving and new technology for radio and television. Two special evening sessions will cover the topics of "Audio Processing in the Digital Age" and "The Upward Engineer."

As usual, the exhibit floor hours will not overlap with the conference presentations. But this year, the exhibit floor adds an extra hour in the afternoon, opening from 10 a.m. until 4 p.m. on Friday and Saturday, Oct. 4 and 5. There will also be plenty of time to meet with colleagues at Thursday evening's exhibitor-attendee reception, Friday's ham radio reception (with its traditional door prizes) and Saturday night's reception and banquet. Congressman Don Ritter (R-PA) will be the featured speaker at the banquet. He is a member of the House Energy and Commerce Committee, and its subcommittee on Telecommunications and Finance.

Conference sessions and exhibits will be held at the George R. Brown Convention Center, one of the country's largest and most highly regarded venues.

Ennes workshops widen scope

As in the past, a number of special workshops will be conducted under the auspices of the Ennes Foundation on the day before the conference begins. (The Ennes Foundation is an arm of the SBE that is devoted to the continuing education of broadcast engineers. It is named after Harold E. Ennes, author of many widely used broadcast texts.) For a small additional fee, conference registrants can attend these morning or all-day sessions, and gain detailed insight or hands-on training in a specific and intensive manner.

A record-setting slate of 12 separate sessions are tentatively scheduled for the Ennes workshops, presented by respected manufacturers and consultants. Among the topics offered are TV facility automation, fiber optics for video transmission, newsroom automation, becoming a contract engineer, low-power satellite uplinking, frequency coordination, engineering team-building, video and audio TV measurements, digital radio broadcasting and various RF sessions.

Because technology is not the sole province of engineers and vice-versa, two of the Ennes workshops this year offer a special "cross-pollinating" feature. For each fully registered engineer attending the newsroom automation workshop, a free pass will be issued for that station's news director to also attend the session. Correspondingly, for each engineer enrolled in the digital radio workshop, the station or general manager may attend that session free.

All workshops will be held on Tuesday, Oct. 2, and seating is limited. Continuing education credits (CEUs) and workshop completion certificates will be awarded.

Extracurricular extras

Houston, nicknamed "Space City," is the home of The LBJ Space Center, the facility that serves as mission control for NASA, and the place where America's astronauts are selected and trained. Tours of the facility (including its collection of moon rocks and historic spacecraft) will be conducted for SBE attendees on Wednesday, Oct. 2, and Thursday, Oct. 3, from 1 p.m. to 4 p.m. on both days. Registration for the tours is limited, and will be conducted on a first-come, first-serve basis. (An additional fee will be charged for this tour, which includes round-trip motorcoach service between the Convention Center and NASA.)

Tours of the well-known Senior Road tower facility will also be conducted by SBE, free to paid convention registrants. The site features a 9-station FM combiner system, and is the only such facility putting this many full Class-C (100kW ERP) signals into a single antenna. This tour will also make a stop at the Houston International Teleport. It will be conducted on the same schedule as the Space Center tours.

Houston is the fourth largest city in the United States, and it offers much in the way of cultural and shopping opportunities. A fun-filled spouse/guest program takes advantage of this, offering two full days of activities (Oct 3-4).

SBE '91 will provide information, education, conversation and fun — all of the ingredients for a worthwhile and memorable convention not be missed.

! : ? = >) |||

Improve the Means to the End

Introducing Our New Extended Benefits Package:

Model MCE325 Programmable User Station



Think of it...

a versatile intercom user station with a wide range of operational and packaging formats.

Physical benefits include a five way modular packaging technique

for permanent or portable applications. While headset operation comes standard, adding our MCS325 Speaker and a plug-in microphone supports an open-listening setting.

Operator benefits sport user-friendly software and hardware based programming; the MCE325 can be operationally and functionally configured to suit individual requirements.

As for the small print: the MCE325 works in conference-line or dedicated-line environments, with 2-channel split talk/listen or 4-channel combo talk/listen, in 2-wire or 4-wire line mode, or a combination of both. Also featured are two channels of IFB, two program inputs, and call signaling. Modular packaging includes: rack mount or portable headset station, rack mount or portable speaker station, or console mount headset station.

Please call or write for details.

The First Name In Intercommunications

Professional Intercommunications
Professional Audio Products

1988 - 1989

Engineering

Emmy Award



RTS SYSTEMS

A Telex Communications Company

1100 West Chestnut Street

Burbank, California 91506

Phone 818-566-6700

Fax 818-843-7953

Circle (64) on Reply Card

www.americanradiohistory.com

SMPTE show preview



SMPTE to celebrate 75th anniversary in Los Angeles.

By Rick Lehtinen, technical editor

The 133rd SMPTE Technical Conference and Equipment Exhibit will be held in the Los Angeles Convention Center from Saturday, Oct. 26 to Tuesday, Oct. 29. SMPTE will celebrate its 75th anniversary at this conference. To mark the event, SMPTE will release a commemorative book, *Milestones in Motion-Picture and Television Technology: the SMPTE's 75th Anniversary Collection*.

Exhibitionist tendencies

This year, 200 companies will display their equipment and services. SMPTE equipment exhibit hours are Saturday, Sunday and Monday, from 10 a.m. to 6 p.m. and Tuesday, from 10 a.m. to 4 p.m.

SMPTE is again offering free use of the successful New Product Introduction room, a place where exhibitors can hold press briefings and private showings for special clients. Last year, 16 companies took advantage of this service.

Papers and tutorials

The conference theme is: "Advanced Motion Imaging — Enhancing the Universal Language." One hundred and twenty-nine papers will be presented in 15 sessions.

Digital technology is the key to enhancing the image for television and film. Three sessions will cover the digital world, from recording to processing and transmission. A morning session on advanced television will feature a discussion on proposed advanced TV systems from around the world.

There will be two concurrent sessions held every morning and afternoon, with the exception of Monday afternoon, when there will be three. The sessions and the exhibit will conclude Tuesday afternoon.

Equipment exhibition hours:

Saturday-Monday, Oct 26 to 28:

- 10 a.m. to 6 p.m.

Tuesday, Oct 29:

- 10 a.m. to 4 p.m.

This will allow conference delegates to participate in SMPTE engineering committee meetings on Wednesday, without schedule conflicts.

A special tutorial session will open Friday, Oct. 25. This all-day event will include demonstrations and presentations on the interface of film, video and computers.

Hands on

The society is expanding attendees' learning opportunities by adding three hands-on workshops to the program: "Bar Code in the Workplace," "Television Test Signals and Equipment" and "Computer Graphics." Participants in the 2- to 3-hour sessions, which will be held Saturday and Sunday from 2:30 p.m. to 5:30 p.m., will have opportunities to update their skills.

The focus of these workshops will be on equipment already in use, as opposed to the prototypes discussed in the technical program.

Honorables to be mentioned

At the opening session on Saturday morning, standards-advocate Roland J. Zavada (retired from Eastman Kodak) will present the keynote address. Zavada's standards efforts have spanned many years and many national and international organizations.

Individuals who have made significant technical contributions will be recognized at Saturday's honors and awards luncheon. Twenty-two people will be recognized at this event. Academy Award winner Gregory Peck is the luncheon speaker.

Fifteen new Fellows of the society will be inducted at the Fellows luncheon on Sunday. Fellows, by their proficiency and contributions, have attained an outstanding rank among engineers or executives in the motion-picture, television or related industries.

A spouse/guest program will include four days of sightseeing, shopping and cultural outings.

Registration

SMPTE is offering a money-saving plan to register for various combinations of events. This can include the technical program, equipment exhibit, tutorial, workshops and honors and awards luncheon. By purchasing one of these combinations, registrants can save up to \$50.

All registrants are invited to an exhibitor-sponsored party on Friday, Oct. 25, to celebrate the SMPTE's 75th anniversary and to preview the exhibit before it opens.


! : ? >)))



Looking for a function generator
with all the bells and whistles,
like direct digital synthesis,
arbitrary waveforms,
and modulation,
that doesn't cost an arm and a leg?



Take a look at the
DS345 from SRS.

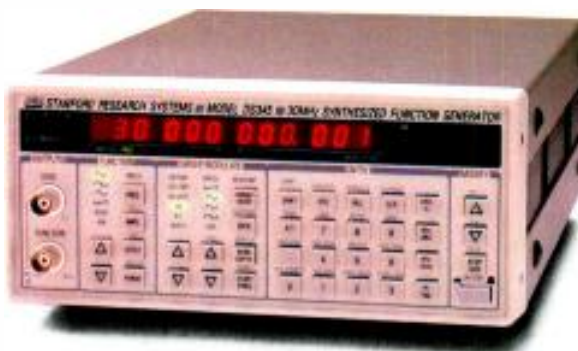

At \$1895, it's the only function generator you need.

It's a general purpose signal generator with standard waveforms, frequency sweeps, and synthesized accuracy. It's a 40 Msample/sec arbitrary waveform generator with 16k points of non-volatile memory. It's a complex signal source with amplitude, frequency, and phase modulation, complete with synthesized modulation waveforms. It's a remarkably agile source capable of making phase continuous frequency jumps in only 25 ns. And it's all available at the touch of a button.

What other generator has everything you want, and more?
For more information about the DS345, call SRS at
(408) 744-9040.

- 30 MHz direct digitally synthesized source
- 1 μ Hz resolution
- 12 bit arbitrary waveforms
- Fast phase continuous frequency switching
- Low phase noise and distortion
- Sine, square, ramp, and triangle waveforms
- Linear and log sweep with markers
- Frequency, amplitude, and phase modulation
- Arbitrary and burst modulation
- Optional GPIB/RS232 interfaces with Arbitrary Waveform Composer Software



STANFORD RESEARCH SYSTEMS

1290 D Reamwood Avenue, Sunnyvale, CA 94089 TEL (408)744-9040 FAX 4087449049 TLX 706891 SRS UD


Circle (65) on Reply Card

Affordable digital audio processing

By Jim Ruse and Dave Landar

Digital audio processing requires extensive computational power, which makes it difficult to bring economical and flexible processing to the professional audio industry. A worthy goal, then, is the development of a digital audio processing engine that would be configurable for many industry needs. For example, it must be expandable to meet the requirements of a specific implementation, and it should not become quickly obsolete. This article will discuss some of the design criteria that must be met in order to create such an affordable digital audio processing engine.

Ruse is product development and marketing manager, and Landar is vice president, research and development, for Audio Animation, Knoxville, TN.

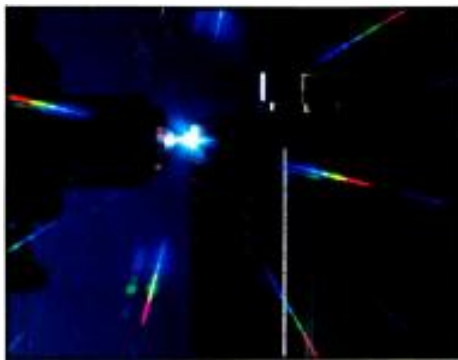

The simple development of this engine is not enough to make the technology usable. It must also have extremely efficient digital signal processing (DSP) software, and a user interface that is intuitive, elegant and powerful. In February 1990, a team of developers at Audio Animation established two goals: 1) to create a configurable, expandable, distributed processing hardware platform using multiple DSP chips, and 2) to develop ultracompact processing software, both within a flexible graphic user interface (GUI). The first implementation of this engine for broadcast systems has been completed, under the trade name *Paragon digital audio transmission processor*. This engine will serve as the core technology for a series

of future products for other elements of the professional audio industry.

New hardware development

Development of the hardware that would deliver the computational power necessary for digital audio processing involves the leading edge of today's computer science architectures. A distributed processing architecture maximizes the power of multiple DSP chips at all times with a technique called systolic wavefront processing. The Paragon hardware employs a proprietary implementation of this technique.

Systolic wavefront processing can be compared to the human circulatory system. Each DSP chip is completely efficient



Discover The Secret Of The Pyramids.

We've discovered a new acoustical foam that outperforms any we've ever seen (or ever sold).

ALPHA Acoustical Foam.

The secret is in its unique pyramid design.

- Superior Performance
- Uniform Pattern
- UPS Shippable

Call us. We'll gladly send you a brochure and a free sample.

Call 1-800-782-5742.

Acoustical Solutions, Inc.

Licensee **Alpha Audio Acoustics**

Circle (67) on Reply Card

jensen
TRANSFORMERS, INC.

The leading maker of professional audio transformers for almost 20 years... but that's not all:

- Twin-Servo Mic Preamps
- Advanced Retrofits for Magna-Tech Reproducers
- Comtran Circuit Design & Optimization Software
- Free Circuit Design Consultation

Visitors by appointment only. Closed Fridays.

10735 Burbank Boulevard
North Hollywood, California 91601
FAX (818) 763-4574 • Tel (213) 876-0059

Circle (78) on Reply Card

Free Catalog & Audio/Video Applications
Mic, EQ, Line, Tape, Phono, Osc, Trans, Video, ACN, Pwr. Supp.

Press Boxes
1-In/16-out Video/Audio
2-In/24-out Audio

Video & Audio Dist. Amps.
RGB-Sync Dist. Amps.

OPAMP LABS INC (213) 934-3566
1033 N Sycamore Av LOS ANGELES CA, 90038

Circle (77) on Reply Card

VTR CONTROL & AUTOMATION THE MCS-100 SYSTEM

- SIMPLE TO OPERATE
- EASY TO EXPAND
- SINGLE COAX CABLE
- SERIAL & PARALLEL VTR'S
- AFFORDABLE !

Queue Systems (818) 895-8510

Circle (76) on Reply Card

Want more information on advertised products? Use the Reader Service Card.



IT'S AMAZING WHAT




DIGITAL PROCESSING



CAN DO



FOR YOUR

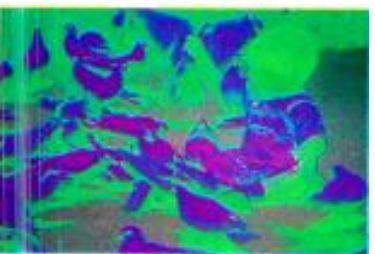

COLOR CORRECTION.

Thomson's new COLORADO will do wonders for your image. It is the first 4:2:2 digital color processing system designed for tape-to-tape operation with no loss of quality. You get digital color correction to achieve anything from the subtlest tint change to the most dazzling special effects. Use it to match scenes, conceal errors, perfect chroma-keys, colorize or balance colors with mixed standards. COLORADO features include static and dynamic operation in single or multichannel modes with on-line access up to 8 files. To discover all the ways COLORADO can help you improve your image, call Thomson Broadcast tollfree at 1-800-882-1824.



COLORADO
4:2:2 digital
component
color
processing
system

 **THOMSON BROADCAST, Inc.**
THE IMAGE OF PROGRESS

THOMSON BROADCAST, Inc. - 49, Smith Street PO BOX 5266 Englewood, New Jersey 07631 ☎ (201) 569 1650 Fax (201) 569 1511
THOMSON VIDEO EQUIPEMENT 17, rue du Petit Albi BP 8244 - 95801 Cergy Saint-Christophe Cedex FRANCE ☎ (33 1) 34 20 70 00 Fax (33 1) 34 20 70 47 tel: x 616 780 F


Circle (70) on Reply Card

www.americanradiohistory.com

Multi-Channel Systems Antenna

MCI offers broadcasters a new **Multi-Channel All Band High VHF (CH. 7-13) and UHF (CH. 14-69) Antenna System** designed for use in multi station and HDTV applications.

During the **HDTV** simulcast period, it will be desirable or even necessary for both NTSC and ATSC signals to be transmitted from the same antenna.

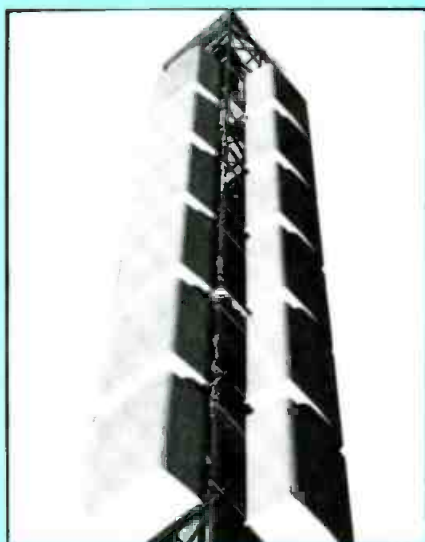

MCI's new broadband multi-channel antenna will radiate both signals with the same *foot print pattern*.

Omni and directional patterns are available.

Only from MCI, the Innovators in standard and custom design RF components for

the Broadcast Industry. Call now for information and pricing.



MICRO COMMUNICATIONS, INC.
Leaders in RF Technology Since 1966.

Tel. (603) 624-4351 • Fax. (603) 624-4822
P.O. Box 4365, Grenier Field, Manchester, N.H. 03108-4365

Circle (71) on Reply Card

in its own task during a given time frame or "beat of the heart." Each DSP chip completes its tasks as quickly as possible. If the task is too great to complete within the time allotted, it is subdivided and distributed to other DSP chips that have the available power. Within each 44.1kHz clock cycle or beat, the entire system may be reconfigured, and the processing tasks may be redistributed so that no processing power remains unused.

In some parallel processing engines, the processors waste a relatively large portion of time waiting for communication of data to or from the next processor. Placing special VLSI chips between the processors reduces the data transfer time to zero, and allows the DSP engine to have a minimum of hardware associated with interprocessor communication. In fact, the California Institute of Technology and Intel have co-developed what's reported to be the fastest computer in the world (the Delta) using a similar architecture. The implementation under discussion here, however, is more suited for digital signal processing, and does not have the massive RAM necessary for supercomputing.

The DSP engine is configured for transmission processing by using multiple Motorola 56001 chips and several proprietary VLSI chips. (See the February 1991 cover.) Because the systolic wavefront processing architecture is not processor-specific, a different DSP chip may be used to accommodate specific implementation needs, such as the Texas Instruments C30, which provides floating point computation.


New software development

Software efficiency is directly related to the amount of hardware necessary to complete processing tasks. Special implementations of digital audio filters and dynamic range controllers are important to success in a configurable, cascaded digital audio processing platform.


Ultrahigh resolution of the audio processing is a critical goal, and should not be sacrificed for code size. With the correct DSP filter and dynamic range controlling software, such a digital implementation has many applications beyond broadcast audio transmission processing. This technology could be implemented into devices appropriate for any audio studio, post-film or video suite, including fully digital mixing consoles with extensive equalization and dynamic range control.

There are also further applications outside the audio industry. After development of the hardware and software systems, the total configuration of the broadcast industry device was determined. Figure 1 shows the signal architecture of the multi-DSP engine, as configured for audio transmission processing.

All blocks in the signal path may be disabled by the user except for the peak-

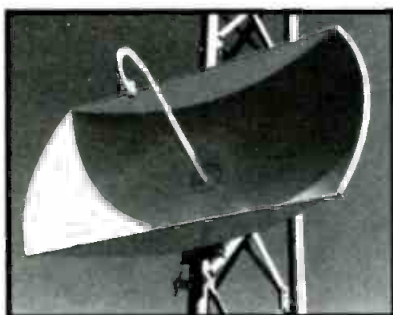

NEW 8' Category A Truncated Antenna

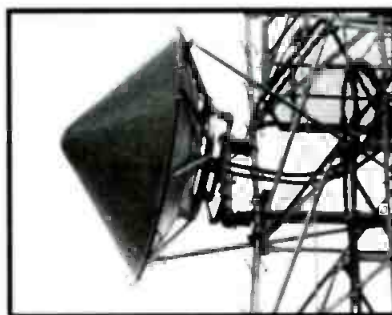


Standard Solid With Radome

Upgrade To 8 Foot Category A No Increase In Tower Windloading

Mark has developed a *NEW* truncated 8 foot antenna that meets FCC Part 74 Category A with a windload no greater than a 6 foot solid. This antenna allows the upgrade of current systems without raising tower windloading or compromising the link quality. The truncated antenna is available in 2, 7 and 13 GHz as well as a dual frequency 7 and 13 GHz model.

Mark manufactures a full line of microwave and cellular antennas, please call us with your requirements.




Radiation Systems, Inc.
Mark Antennas Division

P.O. Box 1548 • Des Plaines, IL 60017
Tel: 708-298-9420 • Fax: 708-635-7946
"See us at the SBE show, Booth #324"

Circle (72) on Reply Card

Ever have to change your plans just before the system was installed?

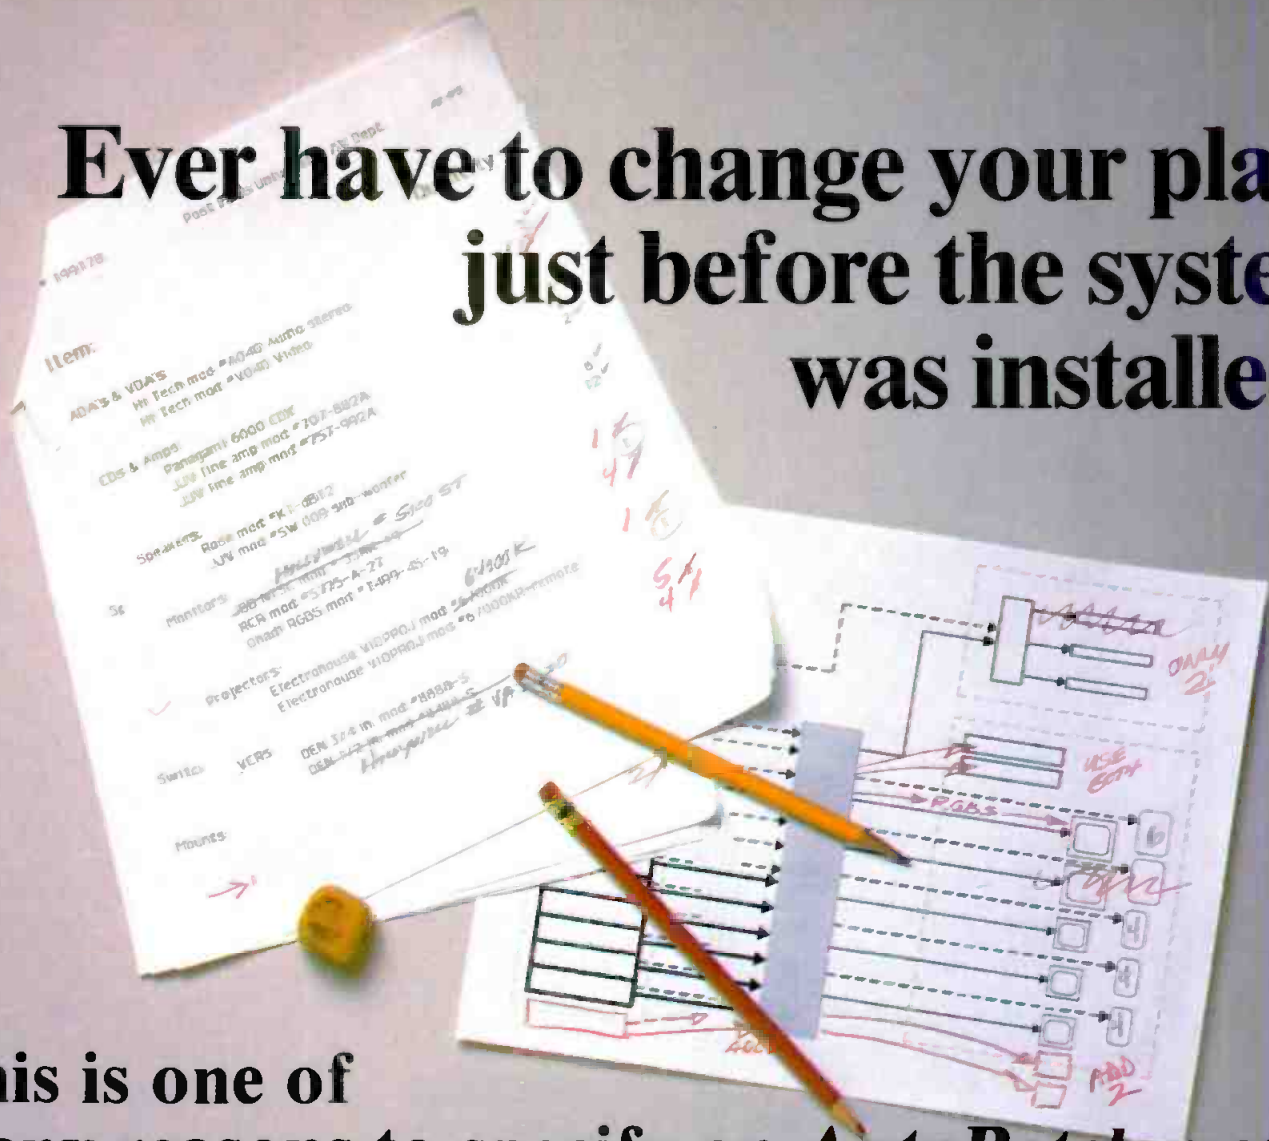

This is one of many reasons to specify an AutoPatch matrix

...because our 4X and 4YDM series provide inputs and outputs in increments of only *four* instead of the usual eight, ten, or sixteen. So adding or dropping a few of either is both easy and economical - before or after installation.

With smaller i/o increments, a minor change in the system configuration doesn't mean a major change in the budget.

More reasons... Anyone can learn to use an AutoPatch in minutes (they're about as easy to understand as an intercom); an RS232 port is included for interface with any serial data device (eg: microcomputers or touchscreen controllers); the new 4YDM series has signal specs suitable for pro audio applications, high speed data, and for both composite and component video systems.



4XDM Single-Cage models (with both audio and video) are available as 4x4, 4x8, 8x4, and 8x8 matrices at even lower prices. Standard 4XDM models are available with up to 3 signal levels providing over 250 configurations from 4x4 through 16x48. 4XDM optional control panel face illustrated



The 4YDM series provides higher signal specs and many more signal levels in over 1000 configurations from 4x4 through 32x128. And . . . 4Y matrices can be configured for even more inputs with our Distributed Matrix network software. 4YDM optional control panel face illustrated

And AutoPatch is priced for budget-conscious system designers . . .

Suggested list price* examples:

4x4	Mono audio	\$1054
8x4	Stereo audio	\$1541
4x16	Video	\$2165
12x8	Video + mono	\$4286

*4X series: w/o control panel; subject to change.

Making 21st Century connections...



...TODAY.

AutoPatchTM

AutoPatch division of XN Technologies, Inc.
14 Calispell, Box 350 Cheney, WA 99004



Ph: 509-235-2636

Circle (111) on Reply Card

Fx: 509-235-2646

US phone 800-622-0246

controlling limiters. The selection of 4-band compression and 4-band limiting was based on the need for low intermodulation distortion (IMD) characteristics. The 4-band operation of the compressors or the limiters may be separately adjusted to act as wideband compressors/limiters. The four bands of each stage also may be adjusted to be partially coupled, which yields some interdependence between the bands' gain reductions.

Crossover frequencies between the bands are continuously variable with resolution to 1Hz. Attack, release, compression ratio and output mix level controls are provided for each of the compressor bands. The limiter bands have controls for release time and input gain, which con-

trols the amount of limiting in each band. Pre-emphasis filters and final 15kHz low-pass filters are placed before the multi-band limiters. (See Figure 1.)

System control

The main controller for the system is an 80286-based PC board that handles administrative, graphic, disk I/O and front-panel tasks. The PC board uses one slot of the custom backplane, which may accommodate up to 12 DSP cards with two DSP chips each, various I/O cards and the optional digital stereo generator card. The analog-to-digital and digital-to-analog converter boards may be populated for 16- or 18-bit resolution. It uses delta-sigma conversion, then FIR filters and decimation to

achieve the desired specifications.

The system was designed to detect a failure in any processor. If a failure occurs, the system brings another processor on-line, loads it and continues full service. Similar self-diagnostics are present in the front-panel microcontroller, which can report its own failure to the PC.

Graphic user interface

Control of all parameters of the processing system is centralized and displayed on a 9-inch VGA monitor behind the front panel with a resistive touchscreen.

The video touchscreen was chosen as the control surface for its "virtual reality," the *display* of controls on a screen rather than the actual physical knobs and buttons

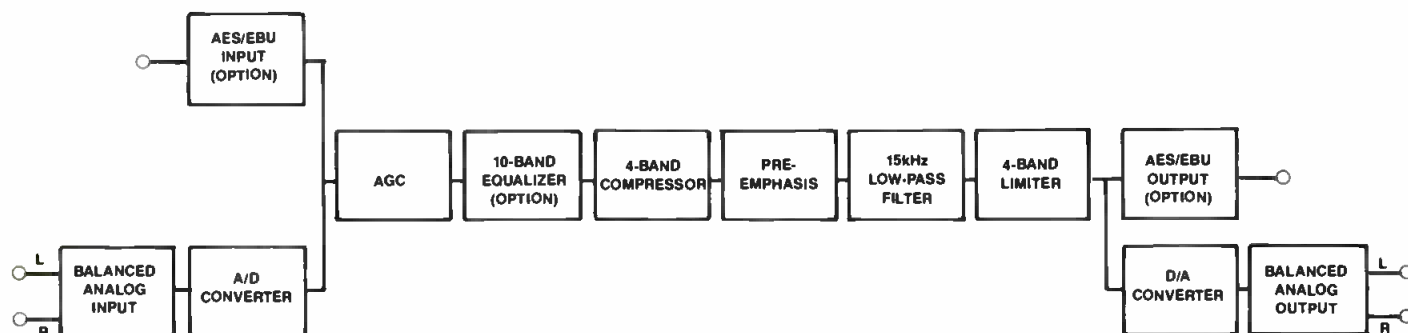


Figure 1. Block diagram of Paragon digital audio transmission processor, including all optional functions.

SDR-400

SERIAL DIGITAL ROUTING SWITCHER

Engineering adjustments are grouped on the setup screens, which control pre-emphasis, input/output levels, L-R metering, password control, AGC gate threshold, AGC defeat, stereo strapping of the

***A distributed
processing
architecture
maximizes the power
of multiple DSP chips
at all times.***

Another advantage of such a display of data and controls is that the user understands the system more rapidly. Full-screen context-sensitive help windows may also be accessed at any time. To adjust a parameter, the user touches the appropriate



Front panel of Paragon digital audio transmission processor, showing the touchscreen control panel at left.

compressors/limiters, pilot injection, composite level and more.

Options and advantages

The systolic wavefront processing architecture, as implemented by Audio Animation, will allow extremely efficient use of DSP hardware. Development of the hardware as an engine and the software as the specific tool allows for easily installed revisions and remote-control options. Reduction of hardware requirements increases reliability and serviceability, and lowers the final cost to everyone.

|:~:~)))))|

The video signal
that it can't handle
hasn't been invented yet.

Before you invest in a routing system, look a bit into the future. Even five years into the future. After all, EDTV and HDTV aren't far off. And who knows what's coming next?

Which is precisely the reason we created the SDR-400. It offers a totally transparent signal in today's formats. But more than that, it gives you the flexibility to upgrade into tomorrow's changing technology.

Add to that BTS service and worldwide support, and you have the best digital router available today, tomorrow, and beyond.

BTS
SWITCHERS
A PHILIPS AND BOSCH COMPANY

Creative Television Technology from BTS

Circle (74) on Reply Card

For more information: 1-800-962-4BTS

Extended switcher features

By Abekas Video Systems

- **A84 integrated cache recording:** combines disk recorder with switcher for 60s duration real time 4:2:2 video storage on four disk drives; provides enhanced speed and precision in video composite development; system also allows random access to 100 full bandwidth still images.

Circle (351) on Reply Card

Digital video effects

By Abekas Video Systems

- **A57 effects:** based on A53-D operating system with all processing in digital domain; includes integral key channel, true 3-D rotation, perspective, corner pinning, solid builder features; 10-bit frame-based processing using 8-bit dynamic rounding; various input, output options.

Circle (352) on Reply Card

Loudness controller

By Advanced Communications International

- **AudioBOSS I:** unit maintains a consis-

tent audio level in systems where sources with varying outputs may be switched into the audio path; designed for use with audio (commercial) insertion systems; includes 15dB noise-reduction circuit and compensates for audio peaks.

Circle (353) on Reply Card

HD video monitors

By Barco nv

- **HDM 2081:** 32-inch medium-resolution CRT in multiple standard high-definition monitor; 16:9 aspect ratio with slot in-line CRT and DAF gun structure; accepts tri-level sync signals of 1250/50, 1125/60 and 1050/59.94 HDTV standards; 30MHz bandwidth; dual inputs definable for RGB or component; compatible with CVM/CPM auto setup probe.

Circle (356) on Reply Card

Video conversion

By Tektronix/Video Products

- **Avanzar video system:** encodes silicon graphics workstation signals to studio-quality video in real time; multiple output

formats include CCIR-601 4:2:2, D-2 parallel and serial, analog RGB, Betacam, M-II, S-Video and composite NTSC and PAL; ChromaMetrix feature verifies that signal conforms to broadcast standards; input compatible with TIFF, GIF, Targa, RGB, YUV file formats.

Circle (377) on Reply Card

Digital video processing

By BTS Broadcast Television Systems

- **Model M NR 9:** median noise reducer; suitable for film grain reduction; dual frame buffers serve as recursive filter and infinite synchronizer/TBC; full 4:2:2 architecture with 10-bit data path; image position adjustment in H and V relative to reference input.



Circle (358) on Reply Card

bvs INTERFORMAT TRANSLATORS



TYPE 734 — RGBS to Y, R-Y, B-Y
TYPE 735 — Y, R-Y, B-Y to RGBS



FR 730 FRAME HOLDS 3 BOARDS, ANY MIX

- Absolute conversion accuracy
- Long term stability
- 10 MHz bandwidth
- Adjustable Y setup
- On-board horizontal phasing
- Comp or non-comp RGB outputs
- Betacam, MII or SMPTE/EBU levels
- 525 or 625 line operation

broadcast video systems ltd.


40 West Wilmot St., Richmond Hill, Ontario L4B 1H8
Telephone: (416) 764-1584 Fax: (416) 764-7438

Circle (75) on Reply Card

327/387 LEDs

DIRECT REPLACEMENT TO INCANDESCENTS

- WHITE MULTICHIPS
- MULTICHIPS
- 5K mcd ULTRA REDS
- INFRAREDS
- FLASHING/BLINKING
- BLUES
- LOW CURRENT

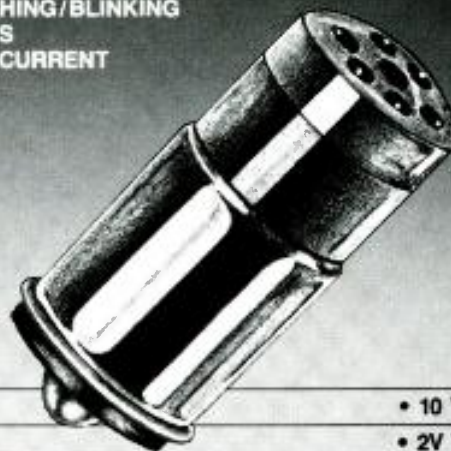

• 10 YEAR LIFE

• 2V TO 120VAC

• 8 COLORS AVAILABLE


• LOW POWER / SHOCK PROOF

LEDTRONICS, INC.

4009 PACIFIC COAST HWY. • TORRANCE, CA 90505
TEL: (213) 549-9995 • FAX: (213) 549-4820 • TLX: 4945454

Circle (80) on Reply Card

At Ampex, we engineer to meet your needs.

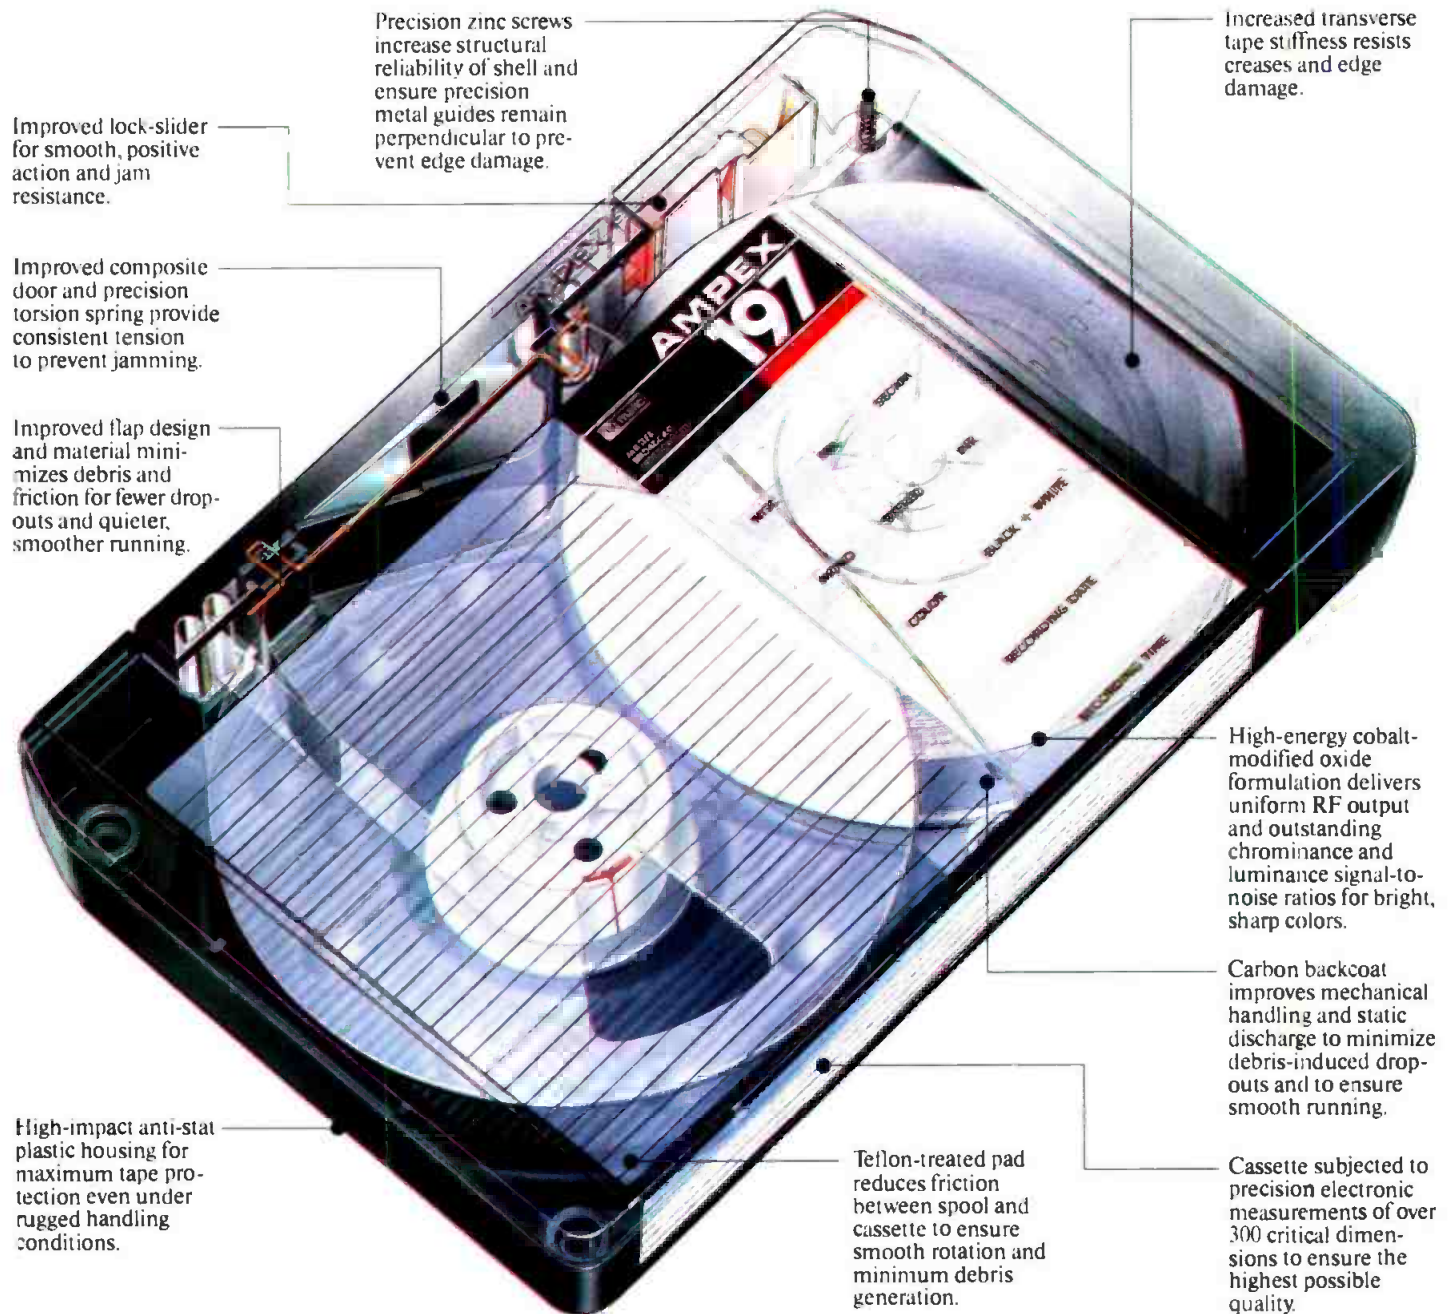

U-matic is still a workhorse of the video industry. And Ampex makes a full range of U-matic products as rugged and long-lasting as the format itself.

Our 197/187 Master Broadcast Videocassettes are continually being



improved to meet the changing needs of the marketplace and the changing challenges of your environment. So we always build our U-matic products with the latest manufacturing technologies to make our cassettes tougher, more durable, and a lot more reliable.

But when you asked for even more performance from the U-matic format, we created Ampex 297 SP. This is tape designed for the new generation of SP recorders—and for the most demanding users.

And as you demand even more

from your U-matics, you can be assured that our U-matics will continue to meet the challenge, whether it's in ENG/EPF, editing, duplicating, or any other application.

From the tape to the flaps to the doors to the box, we engineer Ampex U-matic tapes to roll right through the toughest job—even on older systems. And it's all backed by the industry's most acclaimed customer service and technical support.

Ampex 197/187/297. Engineered to meet your toughest needs.

AMPEX

Video image store

By Rank Cintel

- **Slide file duette:** 2-user version of Silhouette still-store system; shared access to library for edit user and program user; polyphoto cataloging technique; edit user prepares stills and sequences with access to effects capabilities; removable disk or streaming tape archiving; compatible with Logica Gallery database stills libraries.

Circle (372) on Reply Card

Reference monitor speakers

By Westlake Audio

- **BBSM series:** redesigned product with crossover network for improved phase alignment and control of audio characteristics; nine models in series range from two ported 4-inch active woofers with $\frac{3}{4}$ -inch dome tweeter to a system with two 15-inch woofers, 10-inch midrange and 2-inch tweeter.

Circle (380) on Reply Card

Edit bay speaker

By TGI-Tannoy

- **Model CPA 5:** speaker systems using inductive coupling technology (ICT) 5-inch dual concentric driver with high-frequency passive radiator; a 1-inch Duralumin HF dome excited inductively by the low-frequency unit; phase coherence, time alignment for true point source system; for edit and post-production suites.



Circle (378) on Reply Card

Today, a wireless system doesn't have to be expensive to be the best. It just has to be Nady.



We know how it is. You've been using the same time tested wireless system for years. Sure, it costs much more today than it did 10 years ago (even though it is basically the same system), but why change, right?

Well—have you noticed that while the price of your wireless has been going up, the price of wireless from other manufacturers has been going down? With this in mind, you've got to ask yourself: Am I getting the best product performance at the best price from my wireless?

The truth of the matter is, there's a wireless out there with specs and references second to none, at a cost of thousands less per system than what you may now be paying—in short, a

sure cure for those budget blues. Or, as we like to say, a very value priced wireless system. Nady.

For over 15 years, Nady Systems has been in the business of manufacturing the quietest, most durable and versatile wireless systems in the world. And, for years, we've been the Number One wireless in the live entertainment industry, where performance and reliability are absolute prerequisites.

First, check the specs: our top of the line 1200 VHF True Diversity Wireless System, shown above, with its patented companding circuitry, delivers 120 dB dynamic range with the highest signal to noise ratio around. Then, try an A/B comparison with the wireless you're now using. We guarantee

you'll hear the difference. The bottom line: When you use Nady, the sound is truly indistinguishable from hardwire.

Every time.

Ready to re-think which brand of wireless to order? With Nady, you'll not only enjoy superior performance, but with the money you save on your next wireless systems, you can get that new camera you've been trying to work into your budget. For more information, contact:

NADY SYSTEMS, INC.

6701 Bay Street
Emeryville, CA 94608
415/652-2411
FAX: 415/652-5075



The Best Performance and Price in Wireless

PAL signal sources

By PESA Electronics

- **Model VG6140:** 12-bit digital architecture PAL sync, test pattern generator; numerous patterns access from front panel with three user-presettable memories; digital gen-lock referenced to black, composite video or composite sync; correct SC/H phasing.

- **Model DG6250:** video pattern generator produces two PAL analog outputs without 25Hz offset; 50-pattern EPROM accessed from front panel; LCD display indicates selected pattern; VITS insertion; control interface to probe/analyzer for auto setup of BM4400 color monitors.

Circle (369) on Reply Card

Video effects

By Pinnacle Systems

- **DVEator Creation kit:** software to develop digital video effects on an IBM PC or 3000 series system; DVEator effects animator for Prizm workstation maps live video onto 3-D-modeled shapes in real time; based on CrystalGraphics' Sculptor software.

Circle (370) on Reply Card

Graphic storage

By Quantel

- **Magneto-optical drive:** standard addition to Paintbox as well as JR and HD models; each removable disk includes a capacity of 650 images; M-O disk also permits transfer of images from one system to another, to Picturebox or Harriet editor.

Circle (371) on Reply Card

FM subcarrier application

By AXCESS

• **AXCESS 3000/RDS**: paging system based on RDS technology using FM broadcast subcarriers; permits global paging capabilities and information services; displayable on hand-carried unit with 4-line LCD display.

Circle (354) on Reply Card

Digital audio storage

By Barco-EMT GmbH

• **EMT-466 BEDAS MOD recorder**: storage to 3.2 hours of stereo on interchangeable magneto-optical disks; MUSICAM data format used for encoding; additional drives extend storage to 22.4 hours; three independent stereo outputs; analog and digital audio interfaces.

Circle (357) on Reply Card

Expanded monitor line

By Barco nv

• **Series 2000 monitors**: microprocessor control for reduced setup and adjustment, increased stability; CVM 2137 (14-inch) broadcast, CVM 2537 (14-inch) HR and CVM 2551 (20-inch) medium-resolution monitors; three composite, RGB/component, S-VHS video, audio input; RF section permits reception of all standards; CPM 2000 (21- and 28-inch) stackable monitors with flat square CRTs and input capabilities of CVM units.

Circle (355) on Reply Card



PVM-1073

Vectorscope, waveform monitor, oscilloscope, color frame timing with SC/H phase measurement. In the palm of your hand!

- Many more features
- **\$2,995** list
- Available now
- Dealer inquiries invited
- Call NOW**

**Video Measuring
JUMPS!**
**DOWN in size
and price
... and UP in
performance**

The PVM-1073 Video Multi-meter. LCD digital readout, no cursors to fumble with, no drift CRTs, no graticle marks to interpret. Automatic monitor mode with audible alarm. Dual input electronic camera matching includes nonvolatile memory. Battery or AC operation. ± 0.5 IRE and $\pm 0.6^\circ$ accuracy.



12001 Mathis Way • Grass Valley, CA 95949
(916) 268-0190 Pacific • Fax: (916) 268-3986

Circle (81) on Reply Card

Reduce Bandwidth 75% for Digital Audio Transmission



Intraplex PT/PR-150 modules use 16-bit coding and compression algorithm to transform 15 kHz audio into 128 kb/s bandwidth; 7.5 kHz into 64 kb/s.

- 4:1 bandwidth compression
- Selectable bandwidths 15 & 7.5 kHz
- Two circuits per module stereo or monaural operation
- Remote programmability
- Plug-in modules for use with Intraplex Multiplexers.




Intraplex

Intraplex, Incorporated, 80 Taylor Street, Littleton, MA 01460-3427
TEL: (508) 486-3722 / FAX: (508) 486-0709

Circle (82) on Reply Card

ANVIL M.I.C.S.™ — MODULAR INTERLOCKING CASE SYSTEM

- M.I.C.S.'s unique case lids can be converted into table top field work stations (for computer, military, broadcast, exhibits, etc.)
- Custom measuring and designing available
- Building quality cases since 1952

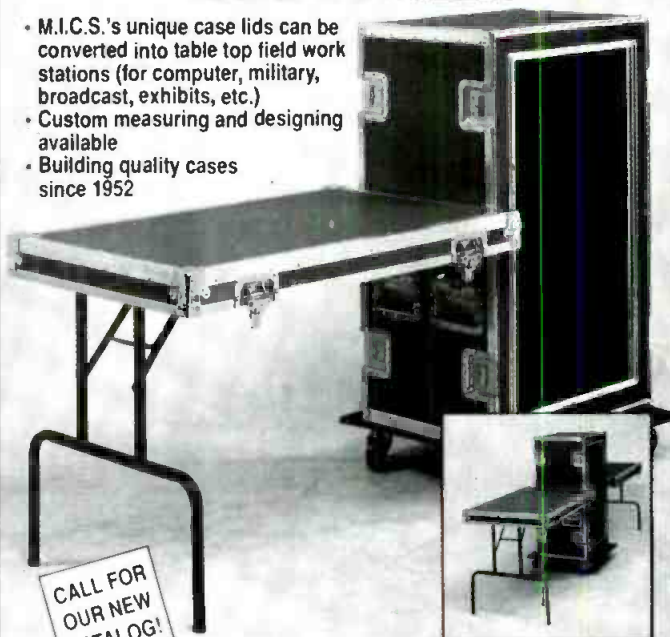

CALL FOR
OUR NEW
CATALOG!

Call Today For More Information



ANVIL CASES
SUBSIDIARY OF ZERO CORPORATION

15650 Salt Lake Ave., City of Industry, CA 91745 • P.O. Box 1202, La Puente, CA 91747

(800) FLY-ANVIL (800) 359-2684

Circle (83) on Reply Card

Get Control of Time ..



Real Time Event Sequencer

CRL is proud to introduce our new **Real Time Event Sequencer**. This one rack height unit is a seven day programmable event sequencer. Any combination of eight or one of 255 outputs can be controlled via a rear panel connector. The unit can store up to 200 events. The outputs are selectable either to latch on or provide half or one second contact closures. Programming is done via a simple key pad, and is displayed on a back-lit LCD. Security keylock and battery backup included. To control time more easily, write, FAX, or phone:



Circuit Research Labs, Inc.

2522 West Geneva Drive
Tempe, Arizona 85282-3192 U.S.A.
(800) 535-7648 (602) 438-0888 FAX 438-8227
Bulletin Board System (602) 438-0459 Telex 350464

Circle (84) on Reply Card

Edit control panel

By Editing Machines

- **EditPad**: array of dedicated function keys, number pad and shuttle knob condenses all necessary control functions into a panel easily accessible with one hand; avoids the need for a mouse and multiple menus; shuttle knob controls tape motion.

Circle (360) on Reply Card

Frequency measurement

By Optoelectronics

- **Model 2810**: hand-held frequency counter; covers range of 10Hz to 3GHz, displaying measured frequency on LCD panel (backlight panel optional); gate times of 0.01s, 0.1s, 1s and 10s selected from front panel; sensitivity as low as 1mV to 200MHz, 10mV to 2.4GHz; antenna or probe inputs on BNC connectors.

Circle (366) on Reply Card

Multitrack disk recorder

By Otari

- **PD-464**: hard-disk recording system based on Mac interface; lockable to SMPTE time code; SCSI-compatible unit features crossfades, track slipping, auto punch-in/out; base system includes 120-minute record time; expansion to six hours and 8mm digital tape backup; Series III operating system with DSP option to control input/output levels, EQ, reverb, delay, mix operations.

Circle (367) on Reply Card

SHOULDER CASE FOR CAMCORDERS



Newly developed instant rain-top shown in place. Note small pocket for storing.



Everyday padded protection.

► This All-The-Time padded case protects against bumps, scrapes, heat and cold. Air travel carry-on. Also quick, easy, extra rainproof and dustproof protection.



K&H Products, Ltd.

Box 246 PHONE 802-442-8171
North Bennington FAX 802-442-9118
Vermont 05257

Circle (85) on Reply Card

Discount prices on everything!
Over 300 top quality product lines at prices so low we promised not to print them!

1-800-356-5844
AUDIO • VIDEO • LIGHTS
FULL COMPASS
Consultation: 608/271-1100
5618 Odana Rd., Madison, WI 53719

Circle (89) on Reply Card

HDTV products

By BTS Broadcast Television Systems

- **CPH 1000:** digital image enhancer; 2-D signal enhancement with positive/negative detail balance; adjustable coring; non-linear gain correction; detail signal from red, green or Y components.
- **RMH 1000 switcher:** HDTV production vision mixer with mixer input delegation, parallel access structured simultaneous switching of multiple programs from other control panels, automated key adjustment, Crystal Key feature; feeds from 30x20 switching matrix; extra function creates sequences with learn mode.

Circle (359) on Reply Card

RF signal sources

B. Marconi Instruments

- **Model 2110:** TV transmitter synthesizer generates UHF carrier output and intermediate frequencies for audio and video signals in PAL, SECAM and other standards; direct UHF output between 430-900MHz replaces crystal-controlled equipment; precision offset capability with 25Hz resolution; model 2111 TV transponder synthesizer for use with up- and down-converters in transponder locks input and output to same frequency standard.



Circle (364) on Reply Card

Product information

By Emcor Products

- **Product Guide:** brochure introduces modular enclosure products and services; particular focus on ESQ. 10 series, Emcor 1, EMI-RFI-shielded cabinets and enclosure-cooling accessories.

Circle (361) on Reply Card

Product guide

By Frezzi Energy Systems

- **Frezzi 90's:** catalog illustrates updated series of battery, charger and battery conditioning products for video production, broadcast, cable and other portable power users.

Circle (362) on Reply Card

VTR control


By Lyon Lamb Video Animation Systems

- **MicroVAS animation controller:** enables single- or sequential-frame recording from computer graphics equipment to video recorders; field-accurate editing; compatible with 1/2-, 3/4- and 1-inch videotape formats and recordable laserdisc; RS-232C -422 VTR ports; VIFC (vertical interval frame code) time reference.

Circle (363) on Reply Card

1:23))))

Winsted® Preferred by Professionals
Worldwide

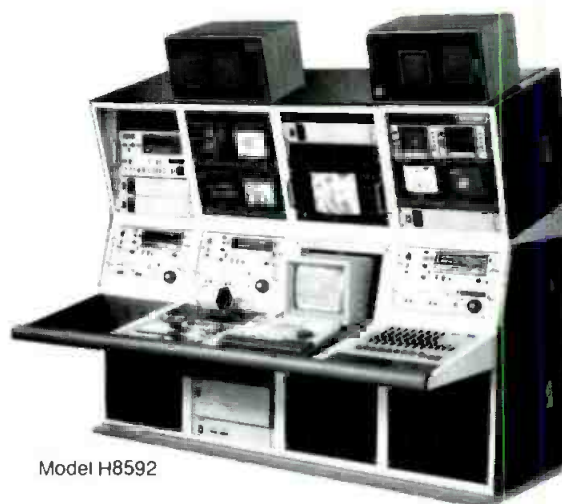

Model H8592

MODULAR VIDEO CONSOLES

Video support system consoles with design flexibility. Units assemble in any configuration from stock components. Standard 19" EIA modular racks. Unique "Building Block" design is expandable to any size system.

For our free full-color
FULL-LINE CATALOG
call us toll free:

800-447-2257

THE WINSTED CORPORATION

10901 Hampshire Avenue So. • Minneapolis, MN 55438
612-944-8556

FAX: 612-944-1546

Circle (87) on Reply Card

Knock Out NOISE



AZ-USA delivers the Knock Out punch to noise. **AZ-USA**, the sound control experts offer...

LOWER prices,
FASTER delivery,
FRIENDLIER service,
BETTER performance,
IMPROVED designs.

We are the sound control champions. Let us help you fight your sound control problems.

**SATISFACTION
GUARANTEED**

Call AZ-USA Toll Free
for a **FREE** brochure.

1-800-842-2790



Ultimate Sound Absorption
NOW BUY FACTORY DIRECT

Circle (86) on Reply Card

1401 W. 76th St.
Minneapolis, MN
55423

Phone: 612 861-2290
Fax: 612 861-2103

© 1991, AZ-USA, Inc.

THE BIGGEST PENNY PINCHER IN RADIO SINCE JACK BENNY.

Mr. Benny certainly knew a great bargain when he made one. And we think he'd appreciate the brilliance of the bargain-priced Tascam BR-20 Broadcast Production Recorder.

The BR-20 is built to do one thing—broadcast production—and to do it exceedingly well. It's a rugged, reliable 2-track with features that make every job easier and more efficient. Like independent reel-size selection. Splice block. Built-in monitor speaker. Independent L/R record for monitoring on one track while recording in sync on the other for overdubs and voiceovers. Fader start. And Quick Cue with Auto-Repeat.

The \$2,299* BR-20. It's got everything you need in a broadcast production recorder. Including a price even your station manager can live with.

Come see it today at your nearest Tascam dealer.

TASCAM®



© 1990 TEAC America, Inc., 7733 Telegraph Road
Montebello, CA 90640 213/726-0303.

* Manufacturer's Suggested Retail Price.

Circle (88) on Reply Card

Preview

October...

PROFITABLE TECHNICAL MANAGEMENT

- **11th Annual Salary Survey: My Share**

Broadcast and post-production operations have never been so complex. The technical personnel required to operate these facilities are highly skilled and valuable. The salary survey looks at compensation programs by radio and television in three different categories.

- **Engineers — Part of the Profit Team**

Engineers should be part of the management team within a station. One key is to show the manager that you understand the need to be profitable. Another is to demonstrate creativity in helping the station make money. The article looks at ways engineers can become part of the station's profit team.

- **Competing for Your Job**

If you had to interview for your job today, would you qualify? That's an important issue many people forget as they become "comfortable" in their surroundings. The article prods readers to re-examine how important their skills really are to the station or production manager.

November...

EIGHTH ANNUAL STATION MAINTENANCE REPORT

- **Troubleshooting Analog Systems**

Servicing the high-quality analog equipment in a radio or TV station can be difficult. Sometimes, the performance of the equipment exceeds the measurement capability of the test equipment. The article looks at techniques that can help isolate and resolve analog problems without a truck full of test gear.

- **Troubleshooting Digital Systems**

Repairing modern digital equipment requires a special expertise. High-pressure-environment control rooms and production suites demand that the problem be diagnosed and solved in minutes, not hours. The article provides the technical aspect with a "cookbook" approach to solving digital-based problems.

- **Caring for High-Power Tubes**

Most broadcasters still use tubes in their transmitters. Today's tubes are reliable and efficient. Yet, to maintain long-life they need proper care and treatment. The article looks at important steps the engineer can take to ensure a long life from the transmitter tubes.

- **Digital and Analog Fiber-Optic Transmission Systems**

As video signals improve, the paths they travel must also improve. Component, RGB, M, D-1, D-2 and new signals must now be interconnected to a variety of equipment within the station. It's important that engineering managers understand where and how fiber fits within the TV station.

Professional services

PROMOTE YOUR SERVICES
and increase business
for as low as \$133 per insertion.
Call 913/541-6745.

TEKNIMAX TELECOMMUNICATIONS

DENNIS R. CIAPURA
PRESIDENT
11385 FORESTVIEW LN.
SAN DIEGO, CA 92131 (619) 695-2429

Robert J. Nissen

THE NISSEN GROUP, INC.

Communications Technology Consultants
32 Ridge Drive • Port Washington, New York 11050
(516) 941-5177

NETCOM

STATE-OF-THE-ART ENGINEERING FOR AUDIO & VIDEO
**TURN-KEY SYSTEMS
DESIGN & DOCUMENTATION
EQUIPMENT SALES
CAD SERVICES**
1465 PALISADE AVE., TEANECK, NJ 07666 / (201) 837-8424

ERIC NEIL ANGEVINE, P.E. consultant in acoustics

specializing in broadcast studio acoustics

910 Lakeridge Drive Stillwater, OK 74075
405-744-6444 405-372-3949

THOMAS STOFFEL Broadcast Consulting Engineer

New TV/Studio/Transmitter Installations
New Systems Design Specialties
Old System Redesign Studio Equip. Maint
Facilities Evaluation Transmitter Maint
455 4th St., Monongahela, PA 15603 (412) 258-2898
25 Years Experience

East Coast Video Systems

A full service company providing...
• Consultation • Cable Systems
• Engineering & Design • Corporate Facilities
• Installations • Broadcast Facilities
• Training • Teleproduction Facilities

52 Ralph Street, Belleville, NJ 07109 (201) 751-5655

JOHN H. BATTISON PE.
CONSULTING BROADCAST ENGINEER,
FCC APPLICATIONS AM, FM, TV, LPTV
Antenna Design, Proofs, Fieldwork
2684 State Route 60 RD #1
Londonville, OH 44842
419-994-3849

h e m e c COMMUNICATIONS, INC. 1-800-444-0856

Satellite Systems Engineering Design & Construction
T1 Busting • Tracking Systems • Transportable and Fixed Uplinks
(805) 963-3765 FAX (805) 962-0920
427 E. Montecito St., Santa Barbara, CA 93101
Washington DC • Lake Tahoe • Los Angeles • Seattle

**For Classified Advertising
or Professional Services information
Call Renée Hambleton at (913) 541-6745**

D. L. MARKLEY

& Associates, Inc.
CONSULTING ENGINEERS
2104 West Moss Ave.
Peoria, Illinois 61604
(309) 673-7511
Member AFCEE

Classified

SERVICES



**MAILING LISTS
AM FM TV
Labels or Diskette
StationBase
(800) 359-2818**

Classified advertising now available as Classified Display or By-the-word

Classified Display: \$107 per column inch, per insertion, with frequency discounts available. 1 inch minimum, 10 inches maximum per ad. Blind ads \$40 additional. Reader Service number \$50 additional. Spot color available for \$150 (color determined by publisher).

By-The-Word: \$1.75 per word, per insertion. Initials and abbreviations count as full words. Blind ads \$40 additional. Minimum charge \$40 per insertion. No agency discounts allowed for classified ads.

Contact Renée Hambleton, at (913) 541-6745, for information on frequency and pre-payment discounts. To place your classified ad send your order and materials to Broadcast Engineering, Classified Ad Mgr., P.O. Box 12901, Overland Park, KS 66212

**Use BE
classified ads**

SERVICES

TRANSMITTER TUBE REBUILDING SINCE 1941:
3CX2500, 4CX5000, 4CX15000 and many others. Write for details. FREELAND PRODUCTS INC., 75412 Hwy. 25, Covington, LA 70433. (504) 893-1243 or (800) 624-7626. 1-91-tfn

ROSATI ACOUSTICS • Acoustic Design • Consultation • Architectural, Engineering & Analysis Services. Since 1976 Solutions for: audio monitoring, anomalies, vibration, isolation & HVAC noise control problems. Select Booth's Aural Contributions. "Isn't it about sound?" 617-423-5546 • Boston 9-91-11

SERVICES

FINALLY!

2 GHZ VIDEO MICROWAVE EQUIPMENT AVAILABLE FOR RENT ANYTIME!
21 Channel Selectable 3/12 Watt Portable AC/DC Transmitters & Receivers with 2 Channel Audio • Also — Dishes, Dualrods, Tripods, Back-up Units, Wireless Cameras, Live Truck & Eng. Crews
• **SPECIAL DISCOUNTS** for Long Term & Multiple System Rentals
• Emergency/Rush Delivery Capable
24 Hours a Day
216/494-9303
Truimage Video
LIVELINK SERVICES
6755 E. Linden Ave. • Canton, OH 44705

BROADCAST STANDARDS CONVERSIONS

VIA STATE-OF-THE-ART, 4 FIELD,
EMMY AWARD-WINNING CONVERTER

PAL BETACAM SP • PAL 1" • S-VHS
3/4" • D-2 • HI-8 • VIDEO-8 • 1/2"

VIDEO DUPLICATION
ALL FORMATS

1-800-USA-DUB1
1-800-872-4821

USA STUDIOS



UNBEATABLE PRICES

FOR THE BEST QUALITY
**VHS DUPLICATION
PAL DUPLICATION
STANDARDS CONVERSION**
100% Guaranteed
Same Day / Overnight Turnaround
(714) 646-6802
PERFECT UNLIMITED CO.
474 E. 17th Street, #103,
Costa Mesa, CA 92627
FAX (714) 646-6221

HELP WANTED

Vetter Communications Company, Inc. has an opening for a qualified broadcast engineer. FCC 1st Class Operators License required. 2-5 years experience in television studio equipment maintenance required. Experience in radio broadcasting and related equipment desirable. Send resume and references to VCC, P.O. Box 14685, Baton Rouge, LA 70898, ATTN: Larry Dietz. VCC is an Equal Opportunity Employer.

ENGINEER—minimum 4 yr. experience for Production/Duplication facility. Sony 1", Beta & ¾". Chips & Tubes. Component Edit Suites, GVG SEG, ADO, Graphics, large Dub plant with Standards Conversion. Send resumes to: **Engineer Resumes, P.O. Box 300405, Houston, TX 77230** or Fax: (713) 748-1684. 9-91-11

BROADCAST MAINTENANCE ENGINEER. WOLF-TV, northeastern and central Pennsylvania's growing Fox affiliate, is currently seeking an experienced Broadcast Maintenance Engineer. Qualified candidates must have at least two years experience troubleshooting studio and transmitter equipment to the component level. Excellent opportunity for a hard worker to advance into management. Shared on-call responsibilities. Excellent benefits. Salary commensurate with experience. Send resume to: WOLF-TV, ATTN: Chief Engineer, 916 Oak Street, Scranton, PA 18508. E.E.O. M/F. 9-91-11

LPTV SERVICE MANAGER: Southern California based network seeking qualified technician to coordinate field service of national network of LPTV transmitters. Previous hands-on experience in LPTV/translator service required. Some travel. Send resumes to Ben Miller, VP Engineering, Trinity Broadcasting Network, P.O. Box C-11949, Santa Ana, CA 92711. EOE. 9-91-21

FOR SALE

FREE 56-PC CATALOG



Complete line of audio modules and accessories for all engineered sound & broadcast applications

MODULAR AUDIO PRODUCTS
1-800-333-7697 • 516-345-3100 • FAX 516-345-3106
DIV. OF MODULAR DEVICES INC. • ROUTE 1 • SHELTON, CT 06484

TUBES 4CX1000A, 4CX250B, 4-1000A, 4CX15000A, and more. We carry large inventory, all major brands (EIMAC, AMPEREX, RCA) Call Stew 1-800-842-1489. 1-91-11n

SONY, PANASONIC, JVC
Authorized Parts Distributor
SEI ELECTRONICS
2520-22 N. Broad St., Philadelphia, PA 19132
215-223-9400 • 800-523-0894
FAX: 215-223-9423

Circle (100) on Reply Card

SALE - CHYRON INFINITI!
CG SYSTEM, BRAND NEW,
STILL IN BOX. CHYRON
WARRANTIES & OPERATOR
TRAINING
(212) 369-2993 LV. MSG.

HELP WANTED

In Touch Ministries, an evangelical Christian ministry, has an immediate opportunity for a TV Maintenance Engineer. The applicant must possess a BS in electrical engineering with communication emphasis, or a BS in electrical engineering technology, or equivalent experience. Must be able to troubleshoot equipment. Excellent benefits. Send resume and salary requirements to:

In Touch Ministries Atlanta, GA 30308
777 W. Peachtree Attn:
St., NW William F. Barton II

ELECTRONIC TECHNICIAN SHOP/FIELD SERVICE. Electronics company, located in the Chicagoland Area, is looking for a Video Service Engineer with a minimum of 2 years experience. Person to work with Industrial/Broadcast ½", 1" & ¾" VTR's and related equipment. Full Time Position. Mon. thru Fri 8-4:30 pm. Full Company Benefits. Send resume and salary history to: Human Resources Department, 1200 Greenleaf Ave., Elk Grove Village, Illinois 60007. Fax resume to: (708) 364-5019. EOE M/F. 9-91-21

ELECTRONIC ENGINEER WANTED. A manufacturer of broadcast equipment located in the Southwest seeks a person with a strong background in analog and digital electronics with emphasis in audio engineering. Must have experience with DSP and a strong background in analog audio design. Experience in broadcasting and broadcast equipment manufacturing preferred. Company has excellent reputation and good benefits. Send resume only to: Broadcast Engineering, P.O. Box 12901, Dept. 725, Overland Park, KS 66212. 7-91-31

FOR SALE

SALE: VIDEO/AUDIO/B'CAST EQUIP./PARTS
A Few Examples of Demo / Used Equipment
BVP3, BVP5, BVP7, BVW507, BVW65, BVW70, BVW10, BVW15, BVW35, BVW40, DXC M7, BVH1100, BVU800, BVH2000, BVH2500, VPR6, VPR2B, "SP", ABEKAS A-52, CHYRON 4, 3M D-6000, BTS GRAPHICS 5, LAIRD 1700, DUBNER 5K, CHYRON 4100EXB, LAIRD 1500 (C.G.), "5850" PACK, TEK, 528/1420, SONY "D2", SONY/KEG. CAMERAS INCL. CCD, G.V. SWITCHERS.
ALSO STOCK OF: AUDIO RECORDERS, STUDIO EQUIP.; MICROWAVE, ETC.—MUCH MORE.
PARTS: Camera & Transmitter Tubes, Studio Lamps, RCA & Harris Parts, Vacuum Caps, Plugs & Connectors, RF Transistors & I.C.'s, Cable, Etc.
WE ALSO PURCHASE EQUIPMENT. FAX US YOUR LISTS FOR CASH OFFERS AND REQUIREMENTS! (516) 599-6495.

LEASING AVAILABLE
"If you don't see it, ask for it."
FUSION ELEC. LI., N.Y.
516-887-4660 800-645-2300 (FAX) 516-599-6495

CALL US For New and Rebuilt Radio Broadcast Equipment

HE HALL Electronics

(804) 974-6466
1305-F Seminole Trail • Charlottesville, Va. 22901

Circle (101) on Reply Card

NEW PANASONIC EQUIPMENT!
BROADCAST-PROFESSIONAL-INDUSTRIAL
FANTASTIC PRICES—FULL WARRANTY
FACTORY AUTHORIZED TOP QUALITY!
ADVANCED VIDEO SYSTEMS
800-233-2430, 9am-7pm, M-F

BUSINESS OPPORTUNITIES

LET THE GOVERNMENT FINANCE your new or existing small business. Grants/loans to \$500,000. Free recorded message: (707) 448-0330. (PC7) 8-91-31

TRAINING

FCC GENERAL CLASS LICENSE. Cassette recorded lessons with seminars in Washington, Newark, Philadelphia. Bob Johnson Telecommunications, Phone (213) 379-4461. 5-90-11n

FINANCING

LANDMARK FINANCIAL GROUP - Nationwide • \$5k to \$1mm • Equipment Leasing/Financing • Credit Application only to \$25,000 • (214) 644-3297 or FAX (214) 699-7893 9-91-11

EQUIPMENT WANTED

WANTED: USED VIDEO EQUIPMENT. Systems or components. **PRO VIDEO & FILM EQUIPMENT GROUP:** the largest USED equipment dealer in the U.S.A. (214) 869-0011. 4-91-11n

WANTED: USED TRANSMITTERS, all powers, AM & FM, 1970 or newer. **GUARANTEE RADIO SUPPLY CORP.** Call toll free U.S. & Can. 1-800-637-8490 or just the FAX please (512) 727-8458. 9-91-11

MAGNET SUPPLY TRANSFORMER FOR R.C.A.-TTU-30-A-TRANSMITTER (3 Stack Gauged Auto Transformer for R.C.A.-TTU Also 400AMP Three Phase Circuit Breaker. Rick Mann 205-767-1515 WOWL-TV, P.O. Box 2220 Florence, AL 35630. 9-91-11

FOR SALE

-NEW- COLOR BARS, BLACK SYNC \$379

The CSC-50 from HORITA generates both SMPTE or full-field color-bars or black-burst, and composite sync signals. Built-in timer switches from color bars to black after 30 or 60 seconds. Full RS-170A spec. Genlock your system, laydown color-bars and black. Desktop and rackmount versions. **UNCONDITIONAL GUARANTEE.** Contact your local video dealer or
HORITA - P.O. Box 3993
Mission Viejo CA 92690 (714) 489-0240

BETACAM OUTFIT: Sony BVP-330A camera w/low hours on new plumcons; BVU-25; BVV-1A w/VA-1, BP-90 batts, charger. \$12,500.00 complete. BVU-110 w/TC. \$2000; (213) 461-8262. 9-91-11

AMPEX & SONY VTR
Transport Control
with JOG for under \$300

DNF Industries (213) 650-5256
1032 N. Sweetzer, #212, L.A. CA 90069

FOR SALE

Complete field and post-production operation situated in a new leased facility in a medium midwest market. Everything oriented towards shooting and editing in the economical yet professional S-VHS format. Turnkey situation. **Call Barry Carroll at 708/297-0808.**

THOUSANDS OF ITEMS

LISTED BY THE FINEST
POST/PRODUCTION FACILITIES IN THE COUNTRY!
**MANUFACTURERS' & DEALERS' DEMO STOCK
FOR SALE AT SIGNIFICANT SAVINGS**

MOBILE TRUCKS...45 foot fully outfitted Sports Truck—\$800,000; Roscor-built Starfleet KU uplink truck—\$230,000; many trucks starting from \$15,000. ask for Andy Turner...
COMPLETE EDITING SYSTEMS Complete 1" to SP U-Matic suite—\$138,000. Complete M2 A/B Roll systems from \$85,000. U-Matic A/B roll systems from \$27,486

BETACAM SP Betacam recorders and players at significant savings!!! Sony BVW-40—\$11,500; Sony BVW-10—\$6,500; Sony BVW-25—\$5,495; Sony BVP3A/BVW-1A camera/docking Beta arm pkg w/Miller 30—\$8,700; Sony BVP-3/BVW-1 camera/docking Betacam pkg w/Sachtler 7+7—\$7,500

CAMERAS Hundreds of cameras from \$2,500!!! U-MATIC & VHS...ask for Regina Szpak...

CHARACTER GENERATORS Chyron SuperScribes from \$29,500; Scribes from \$25,900; Chyron 4200—\$35,000; Chyron VP-2—\$2,400; Many CG's as low as \$1,000

DIGITAL EFFECTS Microtime RP-1 3D DVE with Matte Channel & Post Effects frame store (demo) - \$33,000; Microtime /CT-3D w/pageturn - \$9,995; ADO-2000 3D DVE with Rotator/Perspective, Digitalmatte/Digitalrail (refurbished)—\$39,000. Sony ME-450 - \$6,000

GRAPHICS Cubicomp full system—\$16,500; Silicon Graphics Iris 3030—\$6,000; Chyron Chameleon - \$2,400; Artstars, Quantel Paintboxes and more

ONE INCH Many units to choose from starting at \$8,750

SWITCHERS Grass Valley 100/DSK-101 switcher/down stream key - \$11,000; For PVM-600—\$8,000; Grass Valley 100N—\$8,000; Echolab DV-7w/serial - \$4,995; Crosspoint Latch 6112 system - 2 ME's + serial adapter unit and audio follow mixer - \$5,500

MICROWAVE KU uplink Flyaway system & C-Band systems available - ask for Mike Stevens

TEST EQUIPMENT INTRODUCTORY SPECIAL (limited quantity)—Kenwood waveform/vectorscope/rack—\$3,145; Videotek test & terminal equipment at substantial savings!!!

LIGHTING complete lighting grip truck for sale - \$32,000 fully loaded field and studio lighting systems available for immediate delivery - ask for Stuart Willis

POWER CONDITIONERS & INVERTERS major lines of conditioners, uninterruptible power supplies and 12V dc to 120Vac inverters at substantial savings

ASK ABOUT OUR BUYER PROTECTION PROGRAM Equipment evaluation, reconditioning and warranty programs available at substantial savings from factory-trained technicians

DON'T TAKE A CHANCE WITH ANOTHER BROKER!!!
WE KNOW THE PRODUCTS. WE UNDERSTAND THE APPLICATIONS. AND WE CARE!
WE WANT YOUR BUSINESS FOR A LONG TIME

Provide Supply can find what you are looking for!! Let us shop for you!!
PROVID SUPPLY CORPORATION
(703) 670-PROS FAX (708) 670-7892

Pro Audio Resources

Exceptional Values / Current Technologies

Mobile Audio Studios—TRIPLE TREAT PLUS TERMS—Call today—make money tomorrow! Pro designed, built, equipped beautiful 45-footer with Harrison 40-in desk, Otari 24-trk(s), mics, ready to serve your cash customers as 1) SMPTE interlock post suite or 2) audio assist for any video shoot and/or 3) major music event coverage

Mics—Unbeatable Beyer bargains on outstanding product (3" stock); MC 736/737 Shotgun, MCE 86 short shotgun, MCE 5/6 & 10 lavs, M500 ribbon CALL for prices on superb used studio models: AKG C-12A, C-414s, 451, Smau SM-57s, SM-81s; Sennheiser MD441-U

Monitors—USCO Audio near-fields with unique down-firing sub-woofer—CALL NOW. Large selection of used values: JBL 4313/4411/4435, Yamaha NS-10MS, Auratones

Mixers—Soundcraft (Demos) 200B 16x4 Std. \$4,465; 200 Delta 16 ch. Std. \$4,815; Allen & Heath MOD III 18x8x16 (Used) \$5,250; TASCAM M-20 20x8x2 (Used) \$5,100 CALL

Recorders—Mitsubishi X-850 Digital 32-trk 3 yrs. old, 2500 Hz, Studer A-800 MKIII 24-trk w/16-trk head CALL

ADM S/TV-24 ideal for broadcast CALL Sony PCM-2500 R-DAT \$2000 MXP-5003V Like new w/center ch., TC, chase-lock synchronizer, stand \$5,100; Foxtex D-20 Pro DAT used on 1 project \$6,500 Otari MX-5050 24-trk from \$1,250 MCI JH-110LB 1" Video Layback w/remote, cart \$5,900 Tascam MS-16 (15&30 ips) \$5,100; ATR 60/2T center ch., TC 2-trks CALL

Digital Audio Workstations—Par Excellence, The lowest cost and best entry level system. PC-based 386/33, 2-trk system, 1 hr. capacity (expandable) hard disk comes ready to work, full 1 yr. warranty, Puts random-access, non-destructive editing and mix-to-picture powers with full SMPTE lock at your fingertips. CALL FOR OTHER DAW OPTIONS

Call or FAX Pro Audio Resources
708-670-7767 FAX 670-7892

A Division of Provid Supply Corp.—Your complete Video Equipment Resource

FOR SALE

GENLOCK YOUR SYSTEM BLACK-BURST, SYNC, AUDIO TONE \$289

Need to genlock your video system? The BSC-50 from HORITA generates black-burst, composite sync, and a 1-KHZ audio tone. Provides 6 separate outputs of any mix of up to 4 each of RS-170A black or sync. Also provides subcarrier, blanking, drive. UN-CONDITIONAL GUARANTEE. Contact your local video dealer or

HORITA - P.O. Box 3993,
Mission Viejo CA 92690 (714) 489-0240

HARRIS 60 Kw UHF TRANSMITTER, factory rebuilt, state of the art MSDC klystrons, full new equipment warranty. Harrison Systems Ltd (301) 595-9220. 8-91-2t

WARD-BECK Custom 32x8x2 T.V. Audio Console with external 24 row patchbay, excellent condition, on air until 6/91—\$42,500.00 B/O. Buyer Ships Audio Consulting and Engineering (415) 512-7391. 9-1-1t

Advertising sales offices

NEW YORK, NEW YORK

Gordon & Associates
210 President Street
Brooklyn, NY 11231
Telephone: (718) 802-0488
Telefax: (718) 522-4751
Mike Trerotola
Telephone: (212) 332-0632
Telefax: (212) 332-0663
888 7th Avenue, 38th Floor
New York, NY 10106

CHICAGO, ILLINOIS

Vytas Urbanas
Telephone: (312) 435-2361
Telefax: (312) 922-1408
55 East Jackson, Suite 1100
Chicago, IL 60604

SANTA MONICA, CALIFORNIA

Herbert A. Schiff
Telephone: (213) 393-9285
Jason Perlman
Telephone: (213) 458-9987
Kelly Daugherty
Telephone: (213) 451-8695
Schiff & Associates
501 Santa Monica Blvd, Ste. 401,
Santa Monica, CA 90401
Telefax: (213) 393-2381

OXFORD, ENGLAND

Nicholas McGeachin
Interlec Publishing Corp.
Unit 3, Farm Business Centre,
Clifton Road, Deddington,
Oxford OX15 4TP England
Telephone: (0869) 38794
Telefax: (0869) 38040
Telex: 837469 BES G

TOKYO, JAPAN

Masayoshi Yoshikawa
Orient Echo, Inc.
1101 Grand Maison
Shinomiya-cho 2-18
Shinjuku-ku, Tokyo 162, Japan
Telephone: (03) 235-5961
FAX: (03) 235-5852
Telex: J-33376 MYORIENT

FREWVILLE, SOUTH AUSTRALIA

John Williamson
Hastwell, Williamson, Rep. Pty. Ltd.
109 Conyngham Street
Frewville 5063, South Australia
Phone: 799-522
FAX: 08 79 9522
Telex: AA87113 HANDM

CLASSIFIED ADVERTISING OVERLAND PARK, KANSAS

Renee Hambleton
P.O. Box 12901
Overland Park, KS 66212
913-888-4661

FOR SALE

CAPACITORS OVERNIGHT

- Power Supply—computer grade: up to 450VDC
- Transmitting - MICA - Sangamo, Cornell-Dubilier
- Oil Filled - Non-PCB Oval, Rectangular

Relays • Filters • Transistors
Any Parts starting with 1N or 2N

1-800-323-0460 FAX 1-802-425-3664
Kellner Electronics, Inc., Charlotte, VT 05445

COPPER! All sizes of wire and strap for AM, FM and TV. Construction, counter poise, grounding. (800) 622-0022. 5-91-5t

FOR PARTS AND SERVICE for Townsend Transmitters, call: Gary Kenny, Broadcast Maintenance Associates, Inc., P.O. Box 817, Neosho, MO 64850 (417-451-1440). For Sale: Harris Visual UHF Exciter. 9-91-1t

The Best Values in used broadcast
equipment are in our FREE Catalog!
Call, Write or Fax today!

MICOR VIDEO EQUIPMENT

5545 N. Clark Street, Chicago, Illinois 60640-1222
312 334 4300 Telex 910 240 9449 Fax 312 334 4385

NEW from DENECKE, INC.



\$395

The DCODE™ Syncbox™
Time Code Generator
for use with the
Denecke Dcode™ TS-1 Time Code Slate
or alone as time code &
sync pulse generator

DENECKE, INC.

5417-B Cahuenga Blvd., N Hollywood, CA 91601
(818) 766-3525 or FAX (818) 766-0209

"Professional Camera Tubes"

New and Demos with Warranty,
Special Discounts!

Also lamps, tubes & parts.
FUSION ELECTRONICS, INC.

L.I., NY

Toll Free: 800-645-2300
NY 516-887-4660 FAX 516-599-6495

A warranty? On used equipment?

We offer millions of dollars of
equipment with service support
coast-to-coast.

Visual Communications Replay (VCR)
brings buyers and sellers of visual communication equipment together. Call to
get our FREE catalog.

1•800•745•8272



Standard Solid With Radome



High & Maximum High Performance

The current FCC Rule (74.641) requires category A antennas in certain frequency bands for fixed TV broadcast auxiliary stations (STL and TV Relay) in areas subject to "frequency congestion" or if interference problems can be resolved by their use. The Current FCC Docket is now attempting to define "areas of frequency congestion". No report has been issued to date.

Mark Antennas Division would like to apologize for any confusion their advertisements may have caused in the past issues.



Radiation Systems, Inc.
Mark Antennas Division
 P.O. Box 1548 / Des Plaines, IL 60017
 Tele: 708-298-9420 Fax: 708-635-7946

Circle (110) on Reply Card

Ad index

	Page Number	Reader Service Number	Advertiser Hotline		Page Number	Reader Service Number	Advertiser Hotline
Abekas Video Systems	33	20	415-369-5111	Neutrik U S A	75	51	908-901-9488
Acoustical Solutions, Inc	96	67	800-782-5742	Nikon Electronic Imaging	5	6	800-NIKON-US
Acrodyne Industries, Inc	61	39	800-523-2596	Odelics Inc	9	8	800-243-2001
ADC Telecommunications	1	4	800-726-4266	Opamp Labs, Inc	96	77	213-934-3566
AEQ SA	63	40		Orban, Div. of AKG Acoustics	7	7	415-351-3500
AKG Acoustics Inc	17	12	415-351-3500	Otari Corp	15	11	415-341-5900
Ampex (AVSD)	52-53	31	800-25-AMPEX	Panasonic	34 35		800/524-0864
Ampex Recording Media	103	79	415-367-3809	Panasonic	37		800/524-0864
Anvil Cases, Inc	105	83	800-359-2684	Panasonic	77	53	800-524-0864
Audio Precision	13	10	800-231-7350	Pesa America	IFC	1	205-880-0795
Audio Services Corp.	96	66	818-980-9891	Plateau Digital Technology	105	81	916-268-0190
Auditronics, Inc.	71	46	901-362-1350	Polyphaser Corp	42	23	800-325-7170
Auto Palch	99	111	509-235-2636	Polyquick	72	48	708-390-7744
AZ-USA Inc.	107	86	800-842-9790	Prime Image Inc	45	25	408-867-6519
Belden Wire & Cable	65	42	317-983-5200	Quanta Corp	67	43	801-328-8872
Bird Electronics Corp.	72	47	216-248-1200	Queue Systems	96	76	818-895-8510
Broadcast Video Systems Ltd	102	75	416-764-1584	Radiation Systems	98,112	72,110	708-298-9420
BTS Broadcast TV Systems	100-101	74	800-962-4BTS	Rohde & Schwarz USA, Inc	88	41	301-459-8800
Burle Industries	3	5	717-295-6123	Ross Video Ltd	79	54	613-652-4886
Circuit Research Labs Inc	106	84	602-438-0888	Sachlier Corp. of America	55	33	516-867-4900
Clear-Com Intercom Systems	54	32	415-527-6666	Schmid Telecommunication	19	13	800-955-9570
Continental Electronics	28	16	214-381-7161	SEI Electronics	110	100	215-223-9400
Crown Center Redevelopment	60	38	816-274-4240	Sennheiser Electronics Corp	82	57	203-434-9190
DAT Store	80	55	213-828-6487	Shure Brothers, Inc	11	9	800-25-SHURE
Dolby Labs, Inc	68	44	415-558-0200	Sierra Video Systems	59	36	916-273-9331
Dynair Electronics, Inc.	43	24	800-854-2831	Sony Business & Professional Group	84-85		800-635-SONY
EEV, Inc.	81	56	800-DIAL-EEV	Sony Business & Professional Group	40-41		800-635-SONY
ESE	38	21	213-322-2136	Sony Business & Professional Group	51		800-635-SONY
Full Compass Systems	106	89	800-356-5844	Sony Pro Video Tape	24-25		800-635-SONY
GLW, Inc.	90	62	615-331-8800	Stanford Research Systems	95	65	408-744-9040
Hall Electronics	110	101	804-974-6466	Stantron	76	98,99	800-821-0019
Harris Allied	27	15	800-622-0022	Switchcraft Inc /Div Raytheon	83	49	312-792-2700
Illbruck	60	37	800-662-0032	Tascam	108	88	213-726-0303
Iniraplex, Inc.	105	82	508-486-3722	Telemetrics, Inc	69	45	201-423-0347
Jampro Antennas, Inc	32	19	916-383-1177	Telex Communications Inc	21	14	800-828-6107
Jensen Transformers Inc	96	78	213-876-0059	Telex Intercom Systems Group	93	64	818-566-6700
K&H Products Ltd.	106	85	802-442-8171	Thomson Broadcast	97	70	201-569-1650
Lelectronics	73	58	800-821-1121	Utah Scientific	39	22	800-453-8782
Ledtronics, Inc.	102	80	213-676-7996	Videotek, Inc	47	26	215-327-2292
Leitch Video of America, Inc	IBC	2	800-231-9673	Vinten	31	18	201-263-4000
Logitek	76	52	713-782-4592	VYVX	49	30	800-324-8686
Maxell Corp. of America	89	61	800-533-2836	Wheatstone Corporation	BC	3	315-455-7740
MCL Inc.	87	59	708-759-9500	The Winsted Corporation	107	87	800-447-2257
Micro Communications	98	71	603-624-4351	3M	29	17	612-733-1959
Microtime Inc	58	35	800-243-1570				
Microwave Networks, Inc	57	34	713-495-7123				
Mohawk Wire & Cable Corp.	74	50	508-537-9961				
Nady Systems, Inc	104	60	415 652 2411				
NEC America	91	63	214-907-4000				

See us at the AES Show
New York, October 5 - 8, 1991

pro-bel

**... IS HERE, AND
BACKED BY THE NAMES YOU KNOW ...**

LEITCH AND HEDCO



Today, more than ever before, you require the utmost in dependability and versatility in your routing switchers.

That's why you need Pro-Bel, the European leader in quality routing switchers.

All Pro-Bel routing switchers are subjected to rigorous testing of every single crosspoint.

They are available in North America with the same level of support and service that you have come to expect from LEITCH and HEDCO.

Why settle for less?

- Analog Video
- Analog Audio
- RS-422 Data
- D1/D2 Serial Digital Video
- AES/EBU Digital Audio

Call the Toll Free Pro-Bel Info Line: 1-800-387-0233

LEITCH

HEDCO

Leitch Incorporated/HEDCO, 825K Greenbrier Circle, Chesapeake, VA 23320 – Tel: (804) 424-7920 or (800) 231-9673 Fax: (804) 424-0639
Leitch Video International Inc., 220 Duncan Mill Rd., Suite 301, Don Mills, Ontario, Canada M3B 3J5 – Tel: (800) 387-0233 Fax: (416) 445-0595

Circle (2) on Reply Card



NEWS & SPORTS – Catch Them Live!

Wheatstone's TV-600S offers new features allowing it to excel in live news and sports programming. Innovations include a Bus-Minus™ IFB system that provides a large number of IFB feeds with bilingual capability, as well as an emergency backup system. Our new Event Computer controls channel sources directly from your station's routing switcher or from the console's own onboard switcher.

The system can store hundreds of events that can be selected from the console or auto-sequenced. Alpha-numeric displays indicate channel sources above each fader. Sources can be changed during live events for those last minute updates. An optional eight input

pre-selector overbridge is also available. It can act as a stand-alone dry contact input selector or interface to the console Event Computer.

Two stereo master outputs are included for domestic and international feeds, plus two mono outputs for SAP and mono sum signals. The TV-600S is available in both mono and stereo subgroup formats, with or without VCA group masters. Mainframe systems and module complements are configured to client specifications.

Take advantage of Wheatstone's experience and reputation and call our application engineers.

 Wheatstone® Corporation

6720 V.I.P. Parkway, Syracuse, NY 13211 315-455-7740

Circle (3) on Reply Card

www.americanradiohistory.com