Od DCd51. engineering An INTERTEC®/K-III Publication November 1997/\$10.00

TESTING DIGITAL SYSTEMS Troubleshooting today's digital hardware

BUDGETING FOR ATV So what's it going to cost?

BE EXCLUSIVE REPORTS:


- Testing 8VSB signals
 Lossless editing with the "Mole"




The New *TV-1000*

Audio Console

LIVE TV - The Way It Has to Be

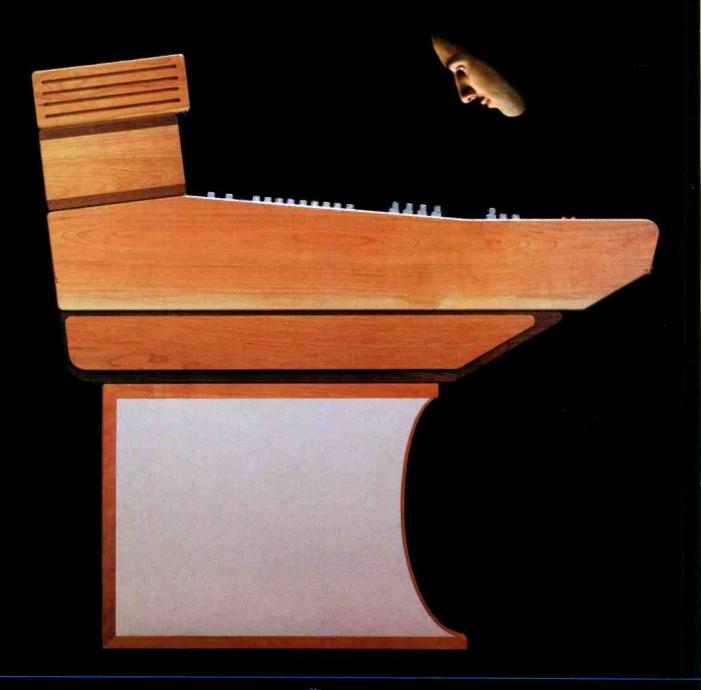

SATELLITE UPLINK SYSTEMS

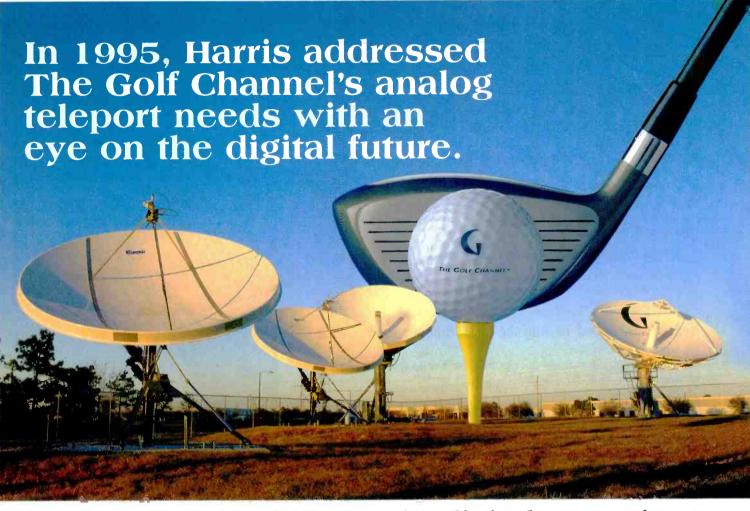

Today, The Golf Channel's digital operations are in full swing.

When The Golf Channel needed a teleport that would start up analog and be ready to add digital quickly and economically, they looked to Harris. And now that they've made the digital switch, they're not looking back. By combining both analog and digital compression technology on the same transponder, Harris effectively doubled The Golf

Channel's programming capacty without increasing bandwidth. So while American golf fans with analog receivers don't miss a single stroke, digital satellite transmission has enabled The Golf Channel to reach new

markets in Japan and throughout the Pacific rim.

Here's what Golf Channel VP of operations Matt Scalici had to say: "When we started out we needed analog transmission, but we knew digital was right around the corner. The digital-ready solution Harris provided enabled us to make a cost-effective, virtually seamless

upgrade. It's absolutely the best path to digital we could have

The unique part of a total turnkey solution Harris designed and built in cooperation with The Golf Channel's

network operations team. From an all-digital television studio featuring serial-digital and fiber-optic technologies, to a Network Operations Center that placed critical equipment in front of operators instead of out in the field, Harris got The Golf Channel off the tee and onto the green.

Whether you need analog today and digital tomorrow, or digital right now, Harris broadcast pros will keep you at the top of your game.

HARRIS CORPORATION **BROADCAST DIVISION**

7920 Kentucky Drive Florence, KY 41042 USA TEL: 606 282-4800 FAX: 606 283-2818



teleport system is

Systems: Electronic News Gathering - Flyaway Satellite - Mobile Production - Radio Studio - Satellite News Gathering - Satellite Uplink Television Production - Television Transmission - Terrestrial Microwave

BROADCAST November 1997 Volume 39, Number 12 R PROBLEM ST R PROBLEM

features

Selecting Test Equipment for Digital Systems 36 By Kenneth Hunold It takes more than a VOM to test today's digital systems.
Maintaining Satellite Equipment
Lossless Editing With the "MOLE"
Understanding and Testing the 8VSB Signal

One way or the other, it all comes down to numbers. The technology is

Budgeting for DTV




By Jerry Whitaker

secondary.

FCC Update 12 Settlement caps lifted	DTV Update 30 Broadcast auxiliary spectrum: Wha	
Transition to Digital 14	is left for DTV?	
Intrafacility digital networks	Cabletec 34	
Management 18	Selecting a video server	
Keeping cool while under fire	Transmission Technology . 78	
	Tower lighting and you	
Computers & Networks 22 From Mac to video	New Products 80	
Production Clips 26 Audio levels and metering	Digital Basics 102 MPEG-2 comes of age	
Interactive 28 Who's paying you to do this?	Ü	

departments

Editorial 06	Industry Briefs 96
Letters to the Editor 08	Classifieds 97
News 10	Advertisers' Index 101









ON THE COVER: New testing procedures and equipment will be needed in the DTV era. The cover illustrates the concept of "just noticeable difference" and the electronic implementation of this human optical ability. Cover courtesy of Tektronix.

How do you Want your HD?



Now Panasonic offers you more choices in how you want your High Definition.

Offering full-bandwidth 10-bit or 8-bit HD recording, the Panasonic AJ-HD2000 offers an integral High Definition processor capable of 1080i and 1035i line standards. The compact, full-featured AJ-HD2000 offers full editing and slow motion features in HD, all on a standard D-5 1/2-inch cassette. An optional downconverter provides standard definition outputs (525p and 525i, digital component, digital and analog composite) from the High Definition VTR.

You can also choose the AJ-D580 D-5 VTR/AJ-HDP500 HD Processor combination if your application calls for the flexibility of both HD and D-5 digital recording at the highest standard definition performance level. This solution offers a feature-rich, dual-standard digital VTR capable of producing 525i or 1125i recordings. One box or two, it's up to you.

When it comes to HD, there really is only one choice. Panasonic offers the highest quality and most cost-effective solutions in HDTV production, on a transparent recording system that is available today!

Welcome to the next generation of High Definition Digital Video.









Stupid rules

n my way to the AES convention, as I was settling into the second leg of the trip in the flying cattle car, my eye caught the safety instruction card in the seat pocket in front of me. You know, that card the cabin attendants always hold up and tell you to read, but you've never looked at? Well, this time I did.

In big letters it said, "If you are sitting in an exit row

and you cannot read this card or cannot now see well enough to follow these instructions, please tell a crew member."

What? Now let me get this straight. First, if I can't read the card's instructions, how would I know I'm supposed to do anything. Second, if I can't see well enough to read the instructions, how would I... well you get the picture.

The whole thing just struck me as another example of dumb gov-

ernmental regulations. How many times have you asked yourself "why" there was a rule or law about something?

Here are a couple more examples. Did you know that as a result of a threatened lawsuit in Kansas, all drive-up ATMs are required to have Braille labeling on the buttons so blind drivers can operate the machines. Yep, no kidding, labeling for blind drivers.

Here's another example. Did you know it's against the law in this town to have a "For Sale" sign in your car? You can be given a \$40 ticket if you even carry a sign that says your car is for sale. Guess the car dealers bought the right politicians. But, then in Kansas City, politicians seem to be for sale all the time.

Somewhere, common sense needs to be the final test for any new governmental regulation. If the proposed new law doesn't make common sense, then the law shouldn't be adopted. So what does this have to do with anything?

After just completing a week-long trip to visit clients and readers on the West Coast, one recurring theme was obvious. The FCC can dictate dumb rules all day long, but they can't control technology. Broadcasters

are looking for opportunities and DTV is certainly filled with them. However, putting the cart before the horse won't make the cart go any faster. Let's get moving on this adventure, but at the same time be realistic. Until viewers sign on, broadcasters certainly won't want to. Nor should stations be bankrupted just trying to stay in business.

Let's adopt a realistic timetable now — without adding new burdens

for public service and free TV time for politicians. The last thing viewers want is to see more commercials about re-electing the same folks who gave us OSHA, the IRS — and only nine years to implement DTV.



Brod Dich

Brad Dick, editor



It's Here.

Anyone Ever Imagined. And It's Bigger Than

\$4,995.

Broadcast Television Studio In a Box The World's First All Real-Time D1

8 Input Live Production Switcher, Real-Time 3D Digital Video Worp Effects, On-Line Non-Linear/Linear Editor, Live Character Generator, Dual Channel D1 Still Store, Two Time Base Correctors, live Video Paint, Animation and Compositing System

860.306.PLAY

www.play.com

letters to the editor



SDI and embedded audio

It sure is nice to read articles with substance. Keep it up. At the Pennsylvania Public Television Network, we are pro embedded audio. We primarily record and distribute programs to our member stations and have no requirement to mix audio on the finished product as delivered to us. One caveat that I would like to give your readers is a problem that plagued us for almost two years.

From the standard ANSI/SMPTE-272M-1994 for Television — Formatting AES/EBU Audio and Auxiliary Data into Digital Video Ancillary Data Space, item 6: audio data packet formatting, item 6.3: the order that the channel pairs are transmitted within a group is not defined (emphasis added). As an example, the channel pair containing Channels 3 and 4 could precede the channel pair containing 1 and 2.

The manufacturer of the digital videotape recorder (DVR) assumed that the order would always be 1-2-3-4-1-2-3-4. If I remember correctly, the manufacturer of the embedding equipment, in order to obtain best performance, embeds the four channels of audio in the sequence 1-2-1-2-3-4-3-4. Therefore, when we digitize and embed more than two channels of audio, the DVR will play back a most annoying digital hash on audio Channels 3 and 4.

In fairness to the DVR manufacturers, the machine was probably designed before the SMPTE standard was finalized. They finally came up with a fix and we modified circuit boards. Once the problem was resolved, we completed the transition to total in-house digital video distribution with embedded audio.

RONALD T. LASK
DIRECTOR OF OPERATIONS & ENGINEERING
PUBLIC TV NETWORK

I enjoyed reading Jim Boston's piece entitled "SDI and Embedded Audio." Frankly, I am surprised that excess bandwidth is not being used for information transfer. I think a parallel would be cable companies that are now starting to use their excess bandwidth to provide highrate, high-quality Internet access.

I also appreciate the injection of common practices like professional equipment commonly uses 48kHz audio and most lines have six samples, but every 12th line has eight.

I have a question related to this article that I know may have to go unanswered:

If SMPTE-259M streams carry audio data in the horizontal blanking interval, what bandwidth is left for

data in the vertical blanking interval? The combination of four channels of embedded audio and ancillary data may help justify the investment in special hardware.

STEVE BELVIN

Jim Boston responds:

First, a little history. D-1 format tape machines were originally eight-bit devices. The EBU originally specified the vertical interval ancillary data (VANC) space use and it was at eight bits. So, VANC could be recorded on early D-1 machines. When SMPTE developed SMPTE-125M, the analog video sample and format standard, it left VANC at eight bits. The horizontal ancillary data space (HANC) was specified at 10 bits in 125M. The only other thing specified in 125M concerning HANC/VANC is the 000 3FF 3FF ancillary data headers.

How to actually format AES/EBU data and multiplex it into the SDI stream specified by SMPTE-259M is described in SMPTE-272M. SMPTE-259M for component digital specifies how parallel 125M data is converted to serial data, channel coding for that data, physical layer attributes and ancillary data preamble words for the actual AES/EBU data. Because of the possibility of grandfathered eight-bit-only data in the VANC, no AES/EBU data was intended for that area.

HANC doesn't have to carry only AES/EBU data. It can carry any type of data. Flags in the AES/EBU data indicate to AES/EBU decoders whether valid audio data is present. As for VANC, you could send 10-bit data in it (as long as the devices in the path would pass 10-bit data). But, there is no standard that I know of that would specify how to handle that data. So, if you created a standard on to yourself or convinced SMPTE that it was time to revisit that issue, then that space could be used.

An example of that is serial digital data interface (SDDI). There is a proposed standard where the active video portion of the SDI signal can be replaced with data. The most common use would be to put MPEG data where the video used to be. One field of MPEG data would take up a fraction of video data space. In fact, MPEG data at 18MB/s (4:2:2 Profile@Main Level) would have four frames of information in approximately one half of one field of active video space (8:1 compression). The rest of that space could be used for any other kind of data.

JIM BOSTON

Continued on page 89

Testing Sencore covers all your needs!



DSA309 Digital Video Studio Analyser

- Tests composite and component serial digital video signals.
- Continuous on-line monitoring of key parameters.
- · Graphic touch screen interface and menu system.
- Errors displayed on the LCD screen, or routed to a printer or stored on the built-in 3.5" floppy drive.
- Real-time detection of illegal colors.



S310 Digital Video Analyser

- Tests composite and component serial or parallel digital video signals.
- · Direct readout key signal parameters.
- · User selectable alarm thresholds.
- A comprehensive CCIR601 pattern generator. (34 different test patterns.)



AT951 ATSC Stream Player

- Single play or continuously looped playout of ATSC or DVB signals.
- Adjustable playout start and stop points.
- Automatic determination of Transport Stream playout rate.
- Internally generated or external source of playback clock.
- · 188 byte packet formats.



SV953P MPEG-2 Portable Transport Stream Analyzer

- Record, playout, monitor and analyze MPEG-2 and DVB signals.
- · Conformance test TS layer and PES layer.
- · Complete Buffer Analysis.
- Real-time monitoring of MPEG-2 for complete signal analysis.
- Easy-to-use Windows NTTM interface.

For detailed information, call 1-800-SENCORE(736-2673)

www.sencore.com • 3200 Sencore Drive • Sioux Falls, SD 57107 Direct Line: 1-605-339-0100 • Fax: 1-605-339-0317

Circle (9) on Free Info Card

www.americanradiohistory.com

SENCORE

news

NATAS honors Emmy winners

The National Academy of Arts and Sciences (NATAS) awarded the 1996-1997 technical achievement and scientific development Emmy awards at a black tie affair in New York on Oct. 7. According to NATAS president John Cannon, the Emmy awards are a reflection of television's unlimited technological future.



The Emmy award winners include:

- The Canadian Broadcast Company and DirecTV won an Emmy for the pioneering application of SMPTE 270Mb/s serial digital technology to large-scale TV facilities.
- Zenith won an Emmy for the pioneering development of wireless remote controls for consumer television.
- Pinnacle Systems, Quantel and Scitex Digital Video won an Emmy for the development of real-time 3-D manipulation for non-linear editing.
- US Precision Lens, Inc., Art R. Tucker and Henry E. Kloss won an Emmy for the pioneering development of 3-CRT video projectors.
- General Instrument, LSI Logic, BBC and Snell & Wilcox won an Emmy for the pioneering development of real-time hardware for motion estimation.

ATSC conducts HDTV broadcast in Australia

The Advanced Television Systems Committee (ATSC) conducted its first over-the-air broadcast of digital HDTV service in the southern hemisphere in October. The digital signals originated from the TCN Channel 9 tower in Willoughby and were received at the Observatory Hotel in Sydney where government and industry leaders enjoyed the demonstrations and learned about the ATSC digital TV standard.

The HDTV demonstrations, lab and field tests were organized with the assistance of the Federation of Australian Commercial Television Stations (FACTS).

The Sydney demonstrations were supported by several member organizations of ATSC, including the Advanced Television Technology Center, which provided integration and technical support; Harris Corporation, which provided the digital transmitter; Zenith Electronics, which developed the digital transmission

systems incorporated in the ATSC DTV standard; Dolby Laboratories, which developed the multichannel surround-sound audio system contained in the standard; Mitsubishi Electronics America, which provided video decoding equipment; and CBS, Snell & Wilcox and Sony Electronics, which provided equipment and technical support. JANDS Electronics also provided equipment to support the demonstrations.

FCC appoints PCIA president to EAS National Advisory Committee

Jay Kitchen, president of the Personal Communications Industry Association (PCIA), has been appointed to serve on the Emergency Alert System's National Advisory Committee, by the FCC's compliance and information bureau.


In 1994, the Emergency Broadcast System Advisory Committee was restructured and renamed the National Advisory Committee (NAC). It assists the FCC in overseeing the Emergency Alert System. The NAC plays a vital role in advising the FCC on all matters concerning the EAS, including policies, technologies, plans and procedures at the national, state and local levels.

SBE publishes "Introduction to DTV"

The Society of Broadcast Engineers is publishing a book titled, "Introduction to DTV RF." The book was authored by Douglas W. Garlinger, CPBE, director of engineering at LeSEA Broadcasting Corporation. The book is a practical guide to assist broadcast engineers in understanding the technical issues faced by all TV stations in the transition to DTV. The book has more than 100 pages and will provide the basic knowledge needed to prepare for television in the 21st century.

The book focuses specifically on the 8VSB transmission system selected by the FCC. It provides an overview of the 188-byte MPEG-2 digital transport system used to carry the compressed video, audio and data bitstreams to the transmitter. The Dolby AC-3 system capable of 5.1 audio channels per bitstream is covered along with the eight types of audio services that will be available with DTV.

The SBE is offering the book at a pre-publication price of \$39 for SBE members and \$49 for non-members, plus shipping charges, through Dec. 31. The book is scheduled to ship Jan. 1, 1998. To order, call the SBE at 317-253-1640 or download the order form from the web site at www.sbe.org.

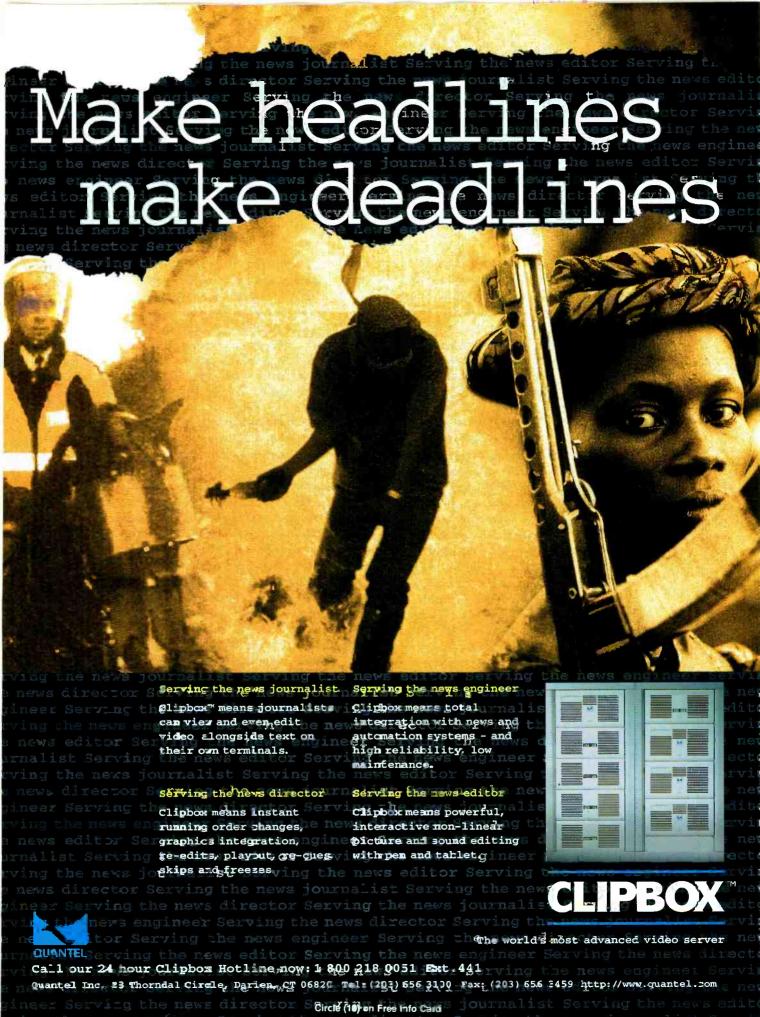

fcc update

Settlement caps lifted

ettlement caps for broadcast applications have been lifted. The Budget Reconciliation Act of 1997 authorizes the FCC to issue construction permits (CP) for new broadcast stations through public auctions where there are mutually exclusive applications pending for the facility. However, until Jan. 30, 1998, the FCC also can waive its restrictions limiting the amount



of funds that may be paid to dismissing applicants as part of a settlement. This 180-day "settlement window" applies only to those applications that were filed before July 1, 1997.

Pending comparative cases may be settled in several ways. The first is through a straight buy-out, whereby one party buys out all of the remaining applicants for the facility. One variation is for an outside party (a

"gray knight") to acquire a minority interest in the prevailing applicant, finance the settlement by buying out the dismissing applicants, finance construction of the station and hold an option to acquire the controlling interest in the permittee shortly after the station goes on the air. Although the FCC has not addressed it. it also may be possible for an outside party (a "white knight") to buy out all of the applicants in a mutually exclusive proceeding and obtain the CP directly.

Two other means of achieving a settlement are through a private auction or mediator. With the auction, the highest bidder obtains the construction permit for the station and the losing applicants share in the proceeds of the winning bid.

With mediation, an experienced neutral person works with the applicants as a group and on an individual basis to find a solution. Mediation provides an opportunity for creative solutions that may not arise in negotiations among the parties. Because a mediator is not an arbitrator and does not impose a disposition of the proceeding, mediation can be a risk-free means of attempting to resolve conflicts among applicants.

After the settlement window closes on Jan. 30, 1998, the settlement caps go back into effect. It is unclear whether the FCC will permit parties to enter into any form of settlement after that time or whether it will require these applications to be subject to a public auction, as is the case with applications filed on or after July 1, 1997.

The act directs the commission to allow an adequate period of time in scheduling public auctions to permit notice and comment on the proposed auction procedures before issuing the new bidding rules, and to ensure that interested parties have sufficient time to develop business plans and assess market conditions before any auction. Although the FCC is in the process of drafting proposed auction rules, it is doubtful that any auctions will be held for new broadcast facilities before next spring.

New commissioners grilled

The Senate Commerce Committee held hearings on the nominations of the four new commissioners on Sept. 30 and Oct. 1.

Questioning of the nominees Michael Powell, Gloria Tristani and Harold Furchtgott-Roth centered on the FCC implementation of the 1996 Telecom Act. All three nominees agreed that failure to adopt the new ratings system might be a reason for reviewing a license renewal application more closely. None of the candidates would commit to not renewing a license on this basis.

The separate hearing on Kennard's nomination to chairman also focused on the FCC's implementation of the Telecom Act. Senator John McCain (R-AZ) questioned Kennard about the TV ratings system and Kennard stated that the commission has a role in determining the acceptability of the ratings system. McCain did not ask Kennard whether failure to adopt the ratings systems should be a factor in license renewal. Industry observers believe that McCain's failure to ask for and Kennard's failure to give a commitment linking the ratings systems and license renewals means the Senator has retreated from the hard line he has taken against NBC, which has refused to adopt the rating system.

Harry Martin is an attorney with Fletcher, Heald & Hildreth, PLC., Rosslyn, VA.



Renewal applications are due for TV stations in the following states on Dec. 1: Minnesota, Montana, Colorado, South Dakota and North Dakota.

Ownership reports are due Dec. 1 for commercial TV stations in Alabama, Colorado, Connecticut, Georgia, Maine, Massachusetts, Minnesota, Montana, New Hampshire, North Dakota, South Dakota, Rhode Island and Vermont.

Tower registrations are due between Dec. 1-31 for towers in Alabama, the District of Columbia and Maryland.

D/CPRO IKEGAMI—STYLE

Ikegami's DVCPRO® Cameras Offer More.

Ikegami's DVCPRO Digital Camcorder Series combine the world's finest camera technology with today's popular digital VTR format. The camera incorporates newly developed digital processing ICs which maximize the potential of digital broadcasting. The HL-V77, and the V77W (16:9/4:3 switchable version) feature three 2/3" 520,000-pixel FIT CCDs, while the HL-V73 uses three 2/3" 4C0,000-pixel IT CCDs. A lightweight body of about 10 lbs. including the viewfinder, and a low certer of gravity with a small VTR mechanism, make the cameras extremely agile.

(4:1:1, 8bit), and delivers video output at a level that surpasses analog counterparts. Employing a 6.35 mm (1/4") wide MP (Metal Particle) tape, DVCPRO cassettes are about one-fourth the volume and one-sixth the weight of conventional 1/2"cassettes, while delivering over 1 hour of recording capacity.

An Ikegami camera with DVCPRO offers the best of both worlds. Contact your Ikegami Regional Sales Office today.



Regami Electronics (U.S.A.), Inc. 37 Brook Avenue, Maywood, NJ 07607 East Coast: (201) 368-9171 West Coast: (310) 534-0050 Southeast: (954) 735-2203 Southwest: (972) 869-2363 Midwest: (630) 834-9774


DVCPRO is a registered trademark of Matsushita Corporation of America.

Circle (11) on Free Info Card

lkegami

Intrafacility digital networks

Step-by-step, the analog elements of video production centers are being replaced by digital systems. Systems based on digital technology allow for, and sometimes require, new approaches to signal routing, switching and networking. Within a given facility, the



options are numerous. The operating paradigms for a digital production center vary from one basic application to the next, however, the common thread is a high-speed network that ties disparate elements of the system together.

When considering networks, it is important to take into account not only the networking architecture within a digital facility, but also

among several digital facilities. It is this aspect of digital technology that promises to radically change the TV station of the future.

Getting from here to there

Three basic methods are used to move video from one physical location to another:

- 1. Wireline, including coax and twisted pair;
- 2. *Electromagnetic*, including satellite and point-to-point microwave systems; and
- 3. Optical, including single-mode and multimode fibers.

Each method has its strengths and weaknesses, but the important point here is that choices exist. In the final analysis, it is not important what method — or combination of methods — is used, but rather that the necessary bandwidth is available upon demand and at an affordable price.

Network communications is defined as the transport of data, voice, video, image and/or facsimile from one location to another. Numerous variables are involved in network analysis, design and implementation. A structured methodology must be followed to ensure that a network, once implemented, will meet the communications needs of the intended facility. Let us begin by examining — in general terms — the digital services suitable for video transmission that are available from the public switched telephone network (telco), with an eye toward how telco services may translate into the wide-area video networks of the future.

The telco template

Nearly as old as electronic communications itself, the telephone company paradigm includes valuable concepts for future wide-area video distribution systems. The public switched telephone network consists of users with telephones connected to a switching system over an *access network*. To allow communication between users that are not connected to the same switching system, the individual switching systems are all connected to each other over a *trunk network*. Although access networks are usually localized to the area surrounding the switching system, trunk networks can span cities, countries and even the globe.

A structured methodology must be followed to ensure that a network, once implemented, will meet the communication needs of the intended facility.

Today, the majority of connectivity in the trunk network and much of the connectivity in the access network is provided using fiber-optic transmission. These elements are referred to as the *transport infrastructure*. This infrastructure also provides direct digital connections between businesses for private voice, data and video networks.

Networks are created by combining network elements and systems. Hubs and cross-connects are used to interconnect linear systems to each other and to rings. The elements and systems used depend upon the application and topology of the network and the degree of survivability required. Automatic protection switching offers the ability to detect a network failure and then transfer the affected traffic to another line. The most basic protection system is a linear 1+1 system (one working fiber, plus one standby fiber).

Although the physical implementation of such a system is hierarchical in nature, the logical implementation (from the user standpoint) appears *flat*; that is, any device anywhere on the system is available to any other device. It is upon this basis that existing video networks have been built. The real changes in intrafacility video transport will come not so much from changes in the

fundamental telco communications systems, but in the way those communications systems are controlled and accessed.

User demands are the driving force behind the current and emerging wide-area network (WAN) services offered to video customers. Users want simple, transparent access to variable amounts of bandwidth as required. In addition, WAN access must offer support for the transmission of a variety of data, including video, still-imaging, fax and voice. Furthermore, it is no surprise that one of the primary driving forces for increased capacity and sophistication of WAN systems is the explosive growth of smaller *local area network* (LAN) systems. As individual production centers and facilities embrace a LAN-based architecture, the WAN-based system is the next, natural extension.

The sophisticated combination of switches and transmission facilities comprising the telco infrastructure is known as the *network architecture*. Communications companies offering WAN services have two major technologies to integrate into a cohesive system. The options are illustrated in Figure 1. Switching architectures, such as *circuit switching* and *packet switching*, assure the proper routing of information to its destination.

The basis of practical WANs is the establishment of virtual paths for signal routing. Modern network architectures treat the application layer as an abstrac-


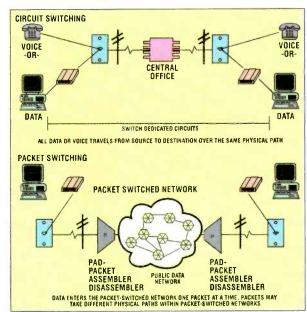


Figure 1. A comparison of circuit-switching vs. packetswitching techniques.

tion. The virtual network thereby created may bear little resemblance to the actual physical network. Indeed, the physical network may change at random times to reflect the optimum use of available bandwidth. Such fluid, virtual connections make on-the-fly WAN connections possible.

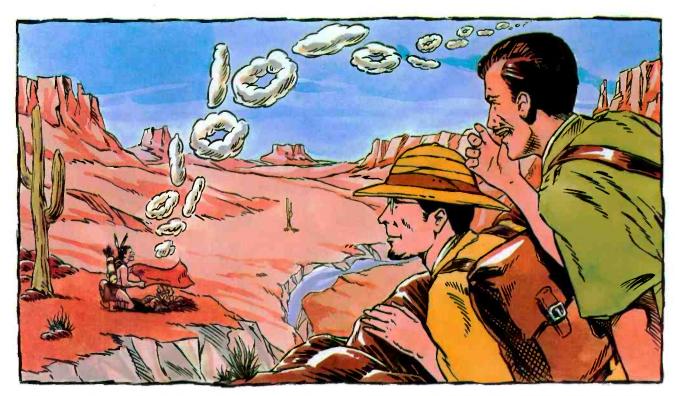

"LOOK WILCOX, THE DIGITAL COMMUNICATIONS TREND IS CATCHING ON EVERYWHERE," WHISPERED SNELL.

transition to digital

CLASSES OF DIGITAL TELECOMSERVICES	BITRATE	MONTHLY RATES	APPLICATIONS
BASIC ISON (2B+D)	128kb/s	\$25 - \$100	DESKTOP VIDEO TELECONFERENCING (15 fps) QUICKTIME AND AVI ISON MODEMS MOTION-JPEG
PRIMARY ISDN (23B+D)	1.288 - 1.472Mb/s	\$600 - \$1,200	HIGH-END VIDEO TELECONFERENCING (30 fps ISON MODEMS MOTION-JPEG MPEG-1
DS1 (T1)	1.536Mb/s	\$400 - \$1,000	"APPROVAL QUALITY" VIDEO LOW-SPEED CABLE MODEMS MOTION-JPEG MPEG-1 MPEG-2 ON MULTIPLE T1
DS3 (T3)	44.736Mb/s	\$2,000 - \$10,000	"BROADCAST QUALITY" & COMPRESSED NTSC HIGH-SPEED CABLE MODEMS MOTION-JPEG MPEG-1 MPEG-2 O1 ON BUNDLED OS3

Table 1. Common digital telecom services of interest to broadcasters.

Practical implementations

Table 1 lists four digital telecom services for digital video applications. As shown, DS1, DS3 and two forms of ISDN involve paid carriage over multiple twisted pairs. It should be noted that DS1 and DS3 are also known as T1 and T3, but in the strictest teleo definition, this terminology only applies to the copper implementations of service networks at these data rates. The classes of service vary with bandwidth capacity. As a benchmark, remember that uncompressed serial digital component video requires about 240Mb/s. Compare this with an MPEG-2 datastream, which requires

a pipeline of about 3 to 30Mb/s, depending upon the amount of compression applied.


As we move into the digital future, networks will allow facilities to operate with resources scattered over a variety of physical locations. Building the necessary infrastructure today will make it easier to integrate worldwide networks into facilities tomorrow.

Jerry Whitaker is a consulting editor for Broadcast Engineering magazine.


Author's note: This article has barely scratched the surface of telco-based WAN systems. For more information, readers may want to con-

sult the following:

- 1. Whitaker, Jerry C., "Routing Technology," Broadcast Engineering, Intertec Publishing, Overland Park, KS, pp. 40-50, May 1996.
- 2. Goldman, James E., "Network Communications," in The Electronics Handbook, J. C. Whitaker ed., CRC Press, Boca Raton, FL, pp. 1,939-1,984, 1996.
- 3. Freed, Ken, "Understanding Digital Telecom Services," Broadcast Engineering, Overland Park, KS, pp. 78-85, April 1997.
- 4. Paulson, C. Robert, "Fiber Optic Transmission Systems," in NAB Engineering Handbook, 7th Ed., NAB, Washington, DC, pp. 717-730, 1992.
- 5. Wu, Tsong-Ho, "Network Switching Concepts," in The Electronics Handbook, J. C. Whitaker ed., CRC Press, Boca Raton, FL, pp. 1,513-1,152, 1996.

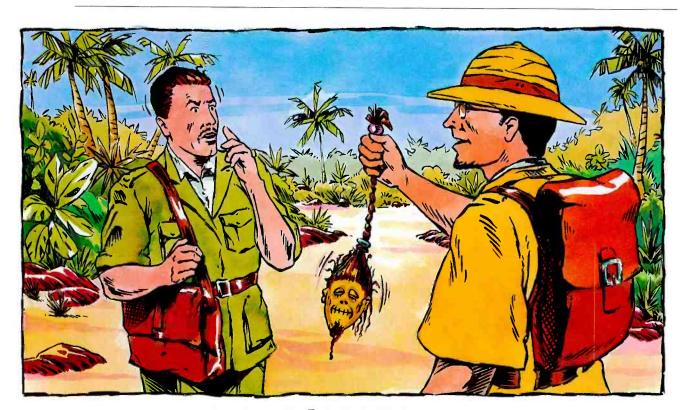

"CLEARLY THE RESULT OF AN EARLY EXPERIMENT IN COMPRESSION..." MUSED WILCOX.

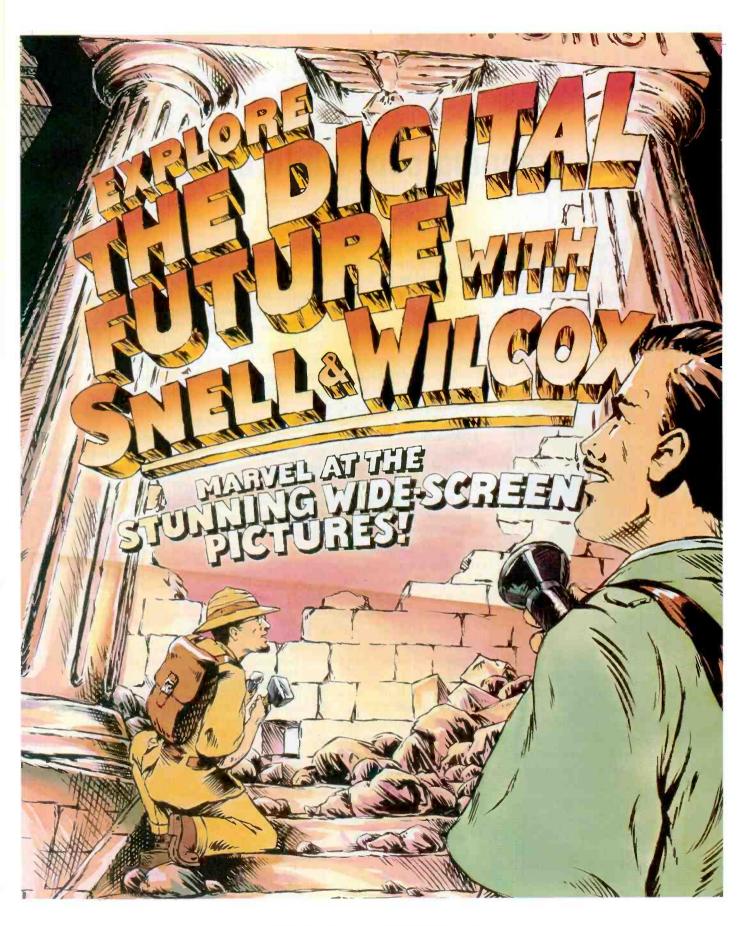



Engineering with Vision

<u>management</u>

Keeping cool while under fire

he No. 1 reason people get fired is anger, and the No. 1 problem people say they have at work is that they don't feel heard and respected. How do we let people feel heard when they are difficult to be around — and still stand up for ourselves?

If the only tool you have is a hammer, you treat everything like a nail. Here are some more tools to add to your toolbox for the next time someone is upset and taking it out on you. No tool will work all of the time

> and some tools will work better for you than others.



Kare Anderson

Lighten up

When others act "hot," we tend to escalate (get loud or more hostile) or withdraw (assume a poker face or get quiet). Both reactions are instinctively self-protective, but self-sabotaging because they are akin to say-

ing, "I don't like your behavior, therefore, I'm going to give you more power." Instead, stay present and acknowledge that you heard with a pause or a nod and without taking sides or using blaming language. Take a few breaths and maintain eye contact. This will buy you time to think about what you want to do and to prove that you heard what was being said.

You can acknowledge by saying, "I understand there's a concern" (rather than "I understand you're upset," which is emotion-laden language). Your goal is to deescalate conflict. Try to "warm up" to the part of the person you can respect. Focus on it mentally and refer to it verbally: "You are so 'dedicated' or 'knowledgeable' or whatever the person's self-image is, which leads the person toward rationalizing his or her behavior. Then say, "May I tell you my perspective?" This sets the person up to give you permission to state your view.

Presume innocence

Nobody likes to be told they are wrong. Whenever someone is not making sense or is lying, you will not build rapport by pointing it out. Let the person save face by asking questions. Say, for example, "How does that relate to the . . . (then state the conflicting information). You may find you were wrong and you "save face." Or, by continually asking non-threatening questions you can get the person to self-correct, which will protect your future relationship.

Look to the person's positive intent. In arguments, it is natural for us to mentally focus on the "right" things you are doing while obsessing about the "wrong" things they are doing. This makes us superior or righteous, and we get more rigid and listen less. Stay mindful of your worst side and his or her best side when you get into an escalating argument. You can increase the chances for reaching an agreement.

Dump it back in their lap

If someone is dumping on you, don't interrupt, counter or counter attack. When the person is done ask, "Is there anything else you want to add?" Then say, "What would make this situation better?" If he or she continues to complain, acknowledge that you heard them and, like a broken record, repeat yourself in brief language, for example, "What will make it better?"

Kare Anderson is a speaker and author. For more communication tips, visit www.sayitbetter.com. To set up a speaking engagement, contact her at 415-331-6336 or kareand@aol.com. (Photo courtesy of M. Christine Torrington.)

Did you know. . .

- People get along better when they stand side by side.
- If you argue for more than 10 minutes, you may not be discussing the real conflict.
- Someone will listen sooner, longer, remember more and like you better if you address his or her interests first, then how that relates to what you have in common and then back to your interests.
- When lying, most people can assume an innocent expression, yet few will respond with the right timing or duration. Ignore the expression and consider if the timing and duration seem natural. You'll increase the chances of knowing if they are lying.
- In a gathering, pay attention to the one who is getting the least attention. You'll change the dynamic in the group and may also gain an unlikely and loyal new ally.
- Praise individuals for thoughtful action, not just to them, but to those who are important to them, and you will reinforce the behavior you most admire.
- Don't embarrass someone while trying to reach an agreement, you may never have their full attention
- When you have the upper hand, don't make a victim of the underdog.
- Offering something free and valued unasked, often instills the desire to reciprocate.
- If you want more from another erson, don't ask for it until they have invested m , energy, money or reputation.

PROFILES nexcellence

Delivering video and audio quality that was "much better than microwave" for a period of four months, Canobeam II, Canon's Optical Wire ess Broadcast Transmission System, cperated "flawlessly" during the hostage standoff in Peru —that according to a news article that quotec CBS Technical Supervisor, Dalas Bureau, Perry Jones.

Jones, who helped set-up the system in Peru, when Iccal authorities prohibited the laying of fiber-optic cable for security reasons, described the Canobeam as "a great technology that delivers superborideo and audio quality, and is much better, and much deaner, than microwave transmission. With the Canobeam you do not experience any 'breathing of chroma'. 'hashing of video, or 'audio noise' like you would with microwave. You get just nice clean audio and video with Canobeam."




CANOBEAM //
WIRELESS
BROADCASTING.

"Canobeam II
'Flawless' For
CBS During
Peruvian Crisis"


For additional information on Canobeam II, or the complete report on this event, call 1-800-321-4388.

Canonical Canonica Canonical Canonical Canonical Canonical Canonical Canonical Canonica Canonica Canonica Canonica Canonica Canonica Canonica Cano

Circle (6) on Free Info Card

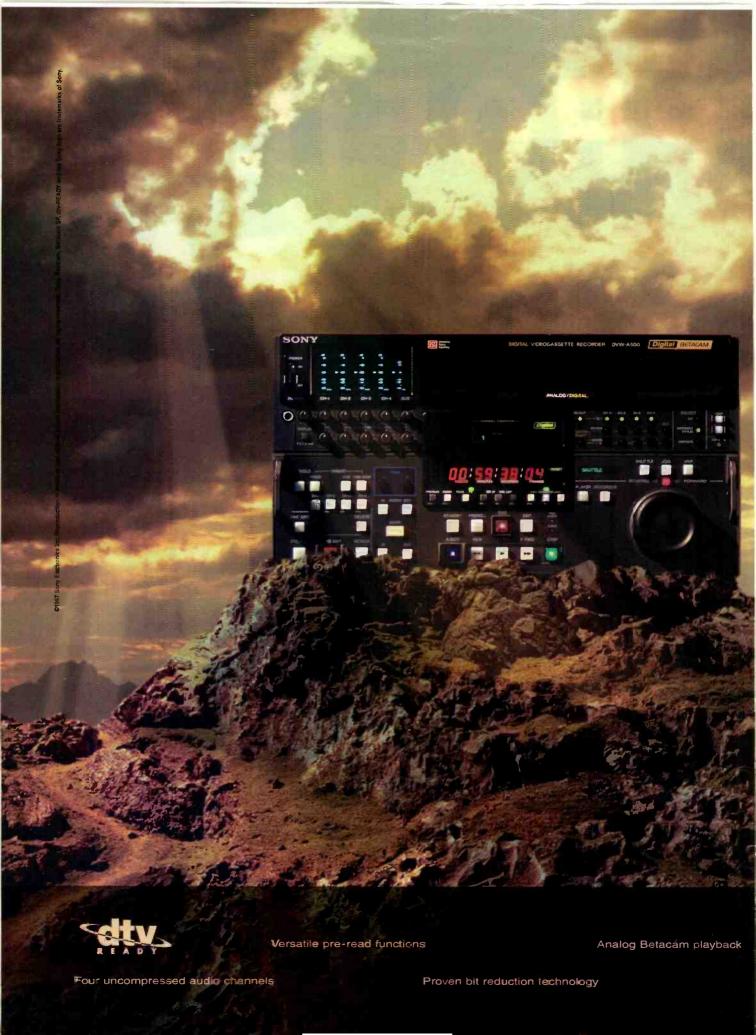

www.americanradiohistory.com

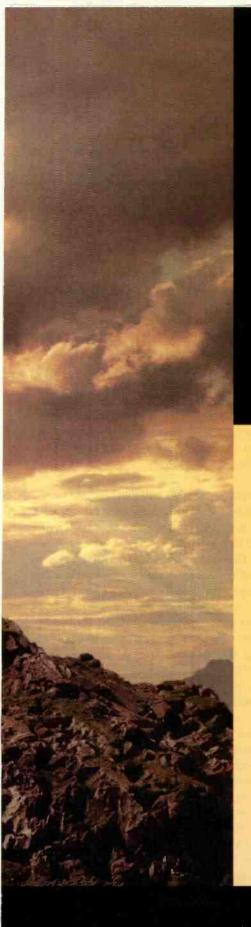

Upon this rock, ye shall build your facility.

Digital BETACAM

With more than 23,000 units already in use, Sony Digital Betacam® format is the solid foundation for a broad spectrum of video operations. From electronic cinematography to archiving, Digital Betacam equipment delivers impressive quality and cost efficiency, as well as playback compatibility with media created on over 350,000 analog Betacam and Betacam SP® machines. Its technical attributes have been carefully conceived with an eye toward the future, starting with a 4:2:2 component digital video signal with 10-bit resolution for superior picture quality. Extremely robust compression stands up to dozens of generations and layers with flawless performance. With its legendary reliability, and new low cost of parts and ownership, it's no surprise the Digital Betacam format has such a faithful following. 1-800-635-SONY, ext. DVW www.sony.com/professional

4:2:2 component digital signal quality

computers & networks

By Brad Gilmer


From Mac to video

acintoshes have always held the high ground in the graphics market and seem to be the system of choice for graphic artists in the broadcast design environment.

But why would someone choose to use a Macintosh over a dedicated paint box? The most common answer is money. You can buy three fully outfitted Macintoshes

> and tons of software for the price of one moderately equipped paint box.

> Let's focus on three tools you can use to get Macintosh graphics off the desktop and into the video domain. The first is to install the Video Explorer card made by Intelligent Resources. The second is to purchase a Multi-Buffer DS-1 framestore and Envoy software from Ensemble Designs. The third is to use a feature of the Accom Axess still-store system. We used Ado-





Brad Gilmer

The Video Explorer

Although the Video Explorer is no longer manufactured, there are large numbers of them in use. The Video Explorer card plugs into your Macintosh. Our Video Explorer has two inputs — the first is a 601 digital video input and the second is a reference video input. Explorer has a 601 digital video output. The Video Explorer uses a Photoshop plug-in to import video. The process is simple. From Photoshop, use the file/import menu to access the Video Explorer settings dialog box; from there you can preview, freeze and then capture the frame you are viewing on the preview monitor into Photoshop. To export from Photoshop, drag the image to the preview monitor and it will be available as a video source on the card's digital output. Anything displayed on the Video Explorer's preview monitor will be output by the Video Explorer card.

A solution by Ensemble Designs

Ensemble has produced a rack-mount framestore and associated software that allows you to import and export up to four channels of digital video. Each input loops with an active reclocked output for use in feeding other devices. There is also a connection for reference video in. The framestore connects to your Macintosh

via a LocalTalk interface or through a network using an Apple Attachment Unit Interface via a 15-pin connector.

Connecting the framestore to a network allows multiple desktops to access it, although not at the same time. There is no lockout, so multiple users can end up battling over control of the buffer.

Envoy Digital Image Transporter software is used to communicate between the framestore and the Macintosh. Not only does this software enable export and import, but it also allows you to adjust video parameters, such as setup and hue over the network. The MultiBuffer will work with SGI and PC/NT platforms, as well as the Macintosh.

The Accom Axess — another solution

The Accom Axess is a large, multi-user, full-featured still-store. It can consist of multiple nodes with a mix of still and moving video, all managed over an Ethernet network. The system allows Macintosh users to read from or write directly to still-store locations. The process is simple and similar to that of the Envoy software. The Axess software on the Macintosh installs an import/export plug-in on Adobe Photoshop. Selecting import or export on this plug-in transfers the image. During the transfer process, you specify a location for the still on the Axess system. But be careful, if you use an active location, there is nothing to keep you from writing over a still that is currently in use.

There are two problems with transferring graphics from the desktop to the video domain: maintaining aspect ratio and generating NTSC legal colors. You should understand both of these problems if you are going to work in this area every day. Fortunately, there are two good sources of information available. The first is Charles Poynton's book, A Technical Introduction to Digital Video. The second is the Colourspace FAQ posted on the Internet. This document is posted routinely in the news group SCI.ENGR.TELEVISION.ADVANCED and is also available at www.inforamp.net/~poynton/ ColorFAQ.html. You can find more FAQ pages on graphic file formats and other topics www.dcs.ed.ac.uk/%7Emxr/gfx/utils-hi.html.

Brad Gilmer is president of Gilmer & Associates, Inc., a technology and management consulting firm.



You can buy a discontinued 2465B for more or a new IWATSU for less.



How often does it turn out that your only choice is your best choice?

While you can still buy a **used** Tek 2465B 400 MHz oscilloscope for as much as \$8,300, our **new** \$8,000 470 MHz not only costs you less but you get a whole lot more.

Besides the extra 70 MHz of bandwith and all of the functionality that you've come to expect from a superior analog oscilloscope, you'll also enjoy...

 Our auto calibration feature that cuts your callibration time down to 30 minutes or less.

- Our 'ghost-free' IWATSU 6" meshless CRT display that assures bright and sharp traces.
- Our full TV triggering function that is a standard feature and not a costly option.


Each of our 100, 200, 400 and 470 MHz analog oscilloscopes comes with a three year warranty and IWATSU's 43 year history of analog oscilloscope experience.

For more information, product literature or to arrange a demonstration call us toll free at 888-637-4513 or visit our web site at http://www.iwatsu.com.

WATSUAMERICAME

430 Commerce Boulevard, Carlstadt, NJ 07072 Tel: 201-935-8486 Fax: 201-935-8533 WebSite: http://www.iwatsu.com e-mail: iwatsu@access.digex.net

Circle (12) on Free Info Card

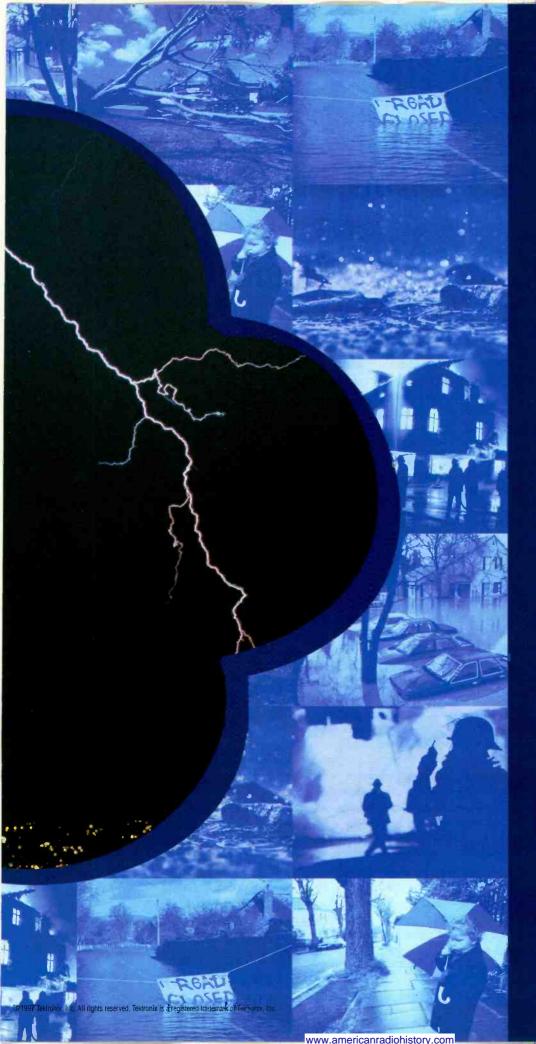

NEWS. FLASH.

Now you can turn a single lightning bolt into a Fundred different stories. In a broadcast second. Fact is. Textronix News Solutions can help you produce more news, better news, in less time -- with more control. As integrated video solutions. they can help you automate all the news gathering, Editing and organizing. At the same time, they can streamlin€ your entire news production — from assignments to on-air scheduling. But before you start to feel any gigavolt jots, know this Tektronix News Solutions can be integrated with tape systems as easily as disk. So you can set your own migration pace on the way to disk. They're scalable. So "ou can grow from newsrooms of 20 people all the way to 200. And, of course, you can rely on Tektronix' long-running support o these "mission c itical" applications. Just so you know, you'll get maximum impact for every broadcast watt --- without the visk of natural disaster. See, if you can dream it up, we've got a way to get you there.

For the whole story, call 1-838-TEK-VIDEO, dept. 606 or visit us at www.tek.ccm/VND

Tektronix

Audio levels and metering

t used to be simple: Keep the meter levels out of the red and everything was OK. Today, things are different. With the emergence of digital audio and a variety of new metering "standards," accurate and consistent monitoring of audio levels has become a challenge.

In those earlier times, the volume unit (VU) meter was ubiquitous, and its standard calibration and ballistics became quite familiar and reliable to audio professionals. This meter standard was developed in the days of narrower bandwidths and tube amplification, however, which made the VU meter's averaging characteristics acceptable.

Peak vs. average response

With the emergence of wider audio bandwidths and solid-state signal paths, more careful control of *peak* audio levels became necessary. This led to the development of the *peak program meter* (PPM). It accurately followed peaks as short as 10ms duration, and its slow release time made the mechanical display of such fast peaks easy to read.

This helped operators know more about audio peaks, which can be as high as 15dB to 20dB above the value indicated by the VU meter. You could never be sure about this, however, because each sound's peak-to-average ratio (or *crest factor*) was different. For example, typical speech might have peaks 10dB above the VU's reading, while a harpsichord or metallic sound effect could hit 20dB above, and a flute might only reach 5dB above. The PPM took away this guesswork, always displaying the maximum peak value of every sound.

Nevertheless, the PPM has its own confusing elements. For example, it is marked with different calibration scales in different countries. (The scale most commonly used in the United States has markings that are roughly analogous to those of the VU meter.) More confounding is the *lag* that the PPM exhibits when displaying steady-state tones. Because these are usually sine-wave signals having extremely low crest factors, the PPM will "underrespond" to them. This means the reference point on the meter that is used to align reference tones is lower (typically by 8dB) than the reference point used when actual program material is monitored.

Absolute vs. relative levels

While such divergence abounds on the dynamic

characteristics of audio metering, there is also plenty of confusion on its static issues as well. In other words, how is the meter referenced or just what does the "0dB" mean in terms of electrical output? This question applies to all meters, regardless of type.

Traditionally, three basic "standards" evolved: the pro audio community usually set 0VU to +4dBu (1.23V), while the broadcast industry often used +8dBu (1.95V) and the semi-pro/industrial market sometimes employed 0dBu (0.775V).

This divergence continues today, and it's complicated by the addition of different kinds of meters on different equipment. This means that the interfacing of devices is not always as simple as lining up all the "0s" on all devices' meters.


Digital metering standards

Contemporary professional audio equipment is generally designed to allow 15dB to 20dB of headroom above the reference level before clipping occurs. The latest issue in metering complication is a new approach to the headroom concept that digital audio presents. Digital systems have an absolutely specified maximum level, which is defined when all bits of a sample are set to "on" or "high." This is referred to as a *full-scale level*, and the unit dBFS has been established to define it. The maximum level possible in any digital system is referenced as 0dBFS, with all other levels in the system defined as negative values below reference.

For this reason, meters on most digital audio devices are marked with a "0" at their maximum value, and all other markings are negative numbers. To accommodate peaks, an incoming reference-level tone is aligned to a level below "0." Throughout the industry, different users have selected -15, -18 or -20dBFS as their reference level, and this has made the exchange of digital recordings between facilities problematic.

All of these issues conspire to make proper audio level control difficult today. Your best hope of a solution includes the use of consistent meter types, the establishment of strict house-standard reference levels and alignment practices, and strong operator training.

Skip Pizzi is editor in chief of BE Radio, Broadcast Engineering's sister publication.

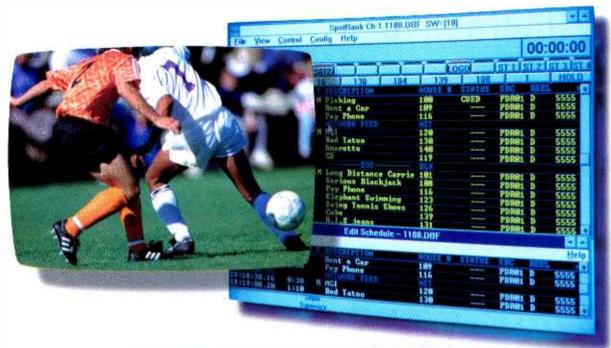

THE RIGHT VIDEO MANAGEMENT COMPANY MAKES EVERY SECOND COUNT.

And every dollar, franc, pound, or peso too! That's why you need a company that offers more than just shrink-wrapped software and board sets. One that has an ongoing history of customer satisfaction and

field-proven system solutions. A company like Odetics Broadcast. We understand your station automation needs and have systems to meet those requirements. Like SpotBank, a complete on-air automation system that provides smart management of video server storage. SpotBank is a flexible system that supports multiple on-air channels. And SpotBank uses RAID servers for maximum data protection, so you can count on every spot.

To assure a smooth transition, Odetics includes system installation, training and round-the-clock customer support. Clearly, the SpotBank family makes every second count.



Odetics SpotBank™ family, a plug and play automation solution.

The SpotBank family of format-independent disk-based disk automation

systems covers all your on-air needs. From single-channel MicroSpot™ to multichannel SpotBank configurations, the SpotBank family includes a configuration that will meet your on-air requirements. SpotBank systems can be expanded to control up to 24 external devices including a variety of VTRs, routing switchers and master control switcher. SpotBank is compact, affordable, field-proven and available today.



The Automated Storage Management Company

USA Tel (714) 774-2200 EUROPE Tel +44 (0) 118 927-4600 ASIA Tel +65 324-0636 WWW http://www.odetics.com/ E-mail broadcast_sales@odetics.com

Who's paying you to do this?

A couple of months ago, we explained why webs will never form on your television. The reasons were based mostly on technical and creative considerations, such as image resolution, viewing distance, personal posture and control devices. However, none of these factors is as important as advertising.

Unfortunately, many ad execs just don't get the Inter-



net paradigm. They still think in terms of eyeballs, impressions and CPM. So, why are so many bright, well-dressed New Yorkers on the wrong track? Well, lots of good news is coming from the Internet advertising scene masking underlying realities. As reported by the Internet Adver-

tising Bureau, spending on web advertising for the second quarter of 1997 was 313% higher than a year ago, reaching \$214 million.

Unless you're selling products directly from a web site, advertising is almost the only way to generate revenues. Only 0.01% of all web sites generate enough dollars from advertising to support the site, though in absolute dollars, advertising revenues are increasing, they support an infinitesimal proportion of all web sites. If all advertising-supported web sites went down tonight, it might be weeks before the average web surfer noticed. But what if every ad-supported TV station went dark tonight?

Is it just a matter of time before advertising on the web truly catches on? Probably not. All TV programming, advertising included, is intended to reduce interactivity. The goal of the programming and advertising executives alike is to make you forget you have a remote control. To do this, most ads are low in information content, high in emotional content and rich in production values.

Current Internet bandwidth limitations prevent advertising from having high production values. As a consequence, the emotional content is low and is not extremely successful at motivating the "click-me" behavior. Most research registers click-through rates in the 1% range — the remaining 99% don't even bother to click and see what's behind the ad banner. (Our own experience suggests that click-through rates, as measured by departures from the ad itself, are exaggerated.

Less than half of the users who clicked on our ads on the Internet landed on our site. We assume the no-shows stopped before downloading was complete.)

Buying ads on the Internet

Traditional mass media advertising sells impressions to defined audiences, such as women between 18 and 34 or middle-income males. Advertisers buy impressions that meet their target demographics. This can be done on the Internet with ad banners. However, equating the impact of the average ad banner with any 30-second spot on the lowest-rated cable channel is a hard sell.


Where a TV spot is intended to keep you from doing something (using the remote), an ad banner must motivate you to do something (use the mouse). To motivate a click-through, first the banner must suggest that there is something of value at the other end. It is at this "other end," the place we are clicking to, that we encounter difficulties. For the most part, the place at the other end of the click-through is a wasteland, with nothing of value to be found. Surveys show that to 99 out of 100 web surfers, most advertisers are clickless.

Thus, we confront the conundrum of the Internet ad buy. You do not advertise on the net in the sense that you "build awareness" or "protect the brand." With television, no action is expected or possible, so the objective is a lasting impression. Victory can be declared when the viewer's memory survives long enough to be recalled and take action on it.

By definition, people on the net are taking action. If they don't, they won't see your ad. Banners are not the ad, they are the doorway. And if a user clicks, he or she expects a payback — you have to deliver the goods — not just promises or pretty pictures. On the net, unfulfilled promises are offensive, and pretty pictures take too long to download. On the Internet, consumers can deal more easily with advertising's reputation for delivering images, not reality; they completely avoid the ad.

Commercial information on the Internet has to get back to basics. Instead of delivering "impressions" to the clients, agencies must begin delivering customers. Instead of delivering images to customers, it has to deliver products — or at least real information about them.

Mark Dillon is vice president, on-line services with GTE, and Steven Blumenfeld is general manager for GTE Internet Television.

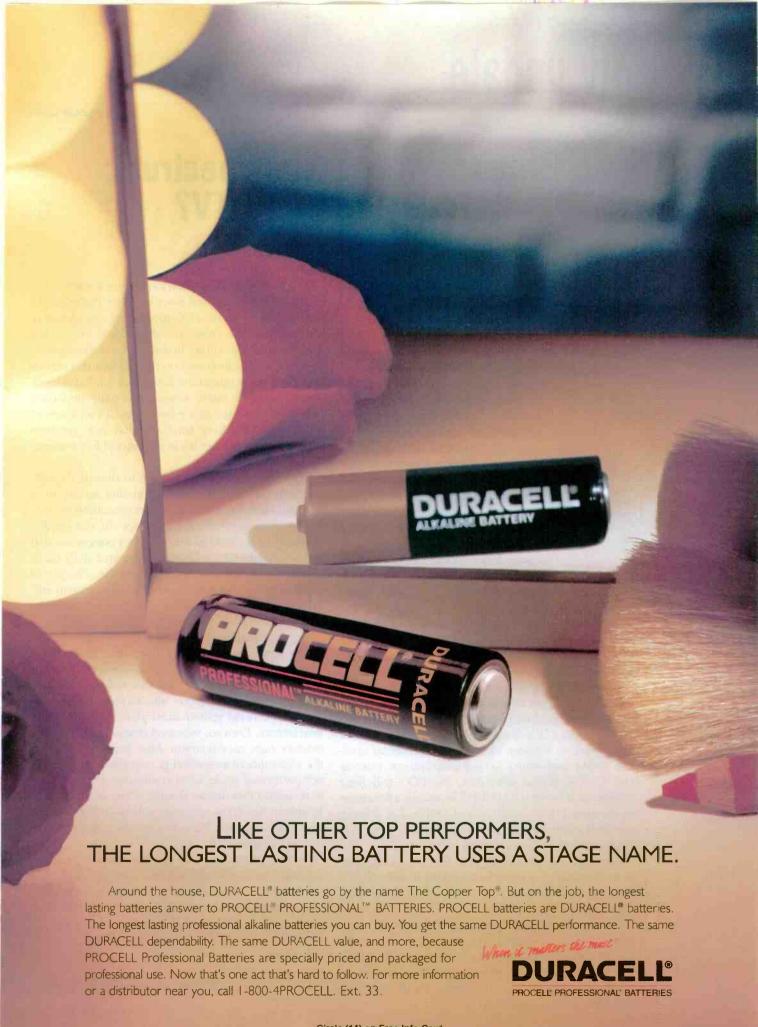

Broadcast auxiliary spectrum: What is left for DTV?

Beginning in 1987, the FCC Advisory Committee on Advanced Television Services analyzed spectrum allocations that could potentially impact or be impacted by the non-broadcast services associated with the implementation of an advanced TV service. The committee recommended that new spectrum should be assigned for broadcast auxiliary and made specific



recommendations on new spectrum locations. Since then, much of the broadcast auxiliary spectrum (BAS) has been lost or must now be shared with other users. In addition, many new broadcasters use this limited spectrum on a day-to-day basis.

Broadcast auxiliary spectrum is used by TV stations to convey their signals on a point-to-point basis. It is primarily used for studio-to-transmitter links (STLs), intercity relays

(ICRs) and electronic news-gathering (ENG). Nonbroadcast video transport falls into two general categories. The first group of services provides contribution transport over the path from the source of the program signal to the studio. Examples of contribution transport services include temporary microwave pickup, ENG, network-to-studio feeds and fixed microwave repeaters. The second category involves distribution transport over the path from the studio to the viewer. Distribution networks include feeder services, such as STL and cable television service (CARS) and broadcast services, such as direct broadcast satellite (DBS) and multichannel distribution systems (MDS). For digital television, the FCC will limit additional terrestrial VHF/UHF broadcast allocations to the same NTSC bandwidth of 6MHz. For delivery methods other than terrestrial broadcast, other options are available to program providers.

Videotape, compact video disk, DBS, cable and fiber to the home all may have the capability of delivering to the viewer DTV signals that occupy significantly more than 6MHz of bandwidth.

In order for delivery systems to achieve their maximum potential, program providers will need to assemble their finished product in a format consistent with the highest-quality distribution system available. In addition, a single high-quality studio standard may be desirable to facilitate production.

Auxiliary spectrum status

On a regular basis, auxiliary spectrum is encroached on and is being removed piece by piece. For example, on Sept. 26, 1997, the FCC adopted an amendment to the commission's rules amending Parts 74, 78 and 101, regarding auxiliary broadcast services requiring permanent coordination criteria between this service and government operations in the 17.8-19.7GHz band. This is just the latest action potentially impacting broadcast auxiliary operations. Even if you know of a broadcast auxiliary band that has not yet been impacted, you can bet it's been targeted for downsizing or elimination.

There is even an amendment out to allocate the 455-456MHz band to the mobile satellite service on a primary basis for non-voice, non-geostationary mobile satellite services. Broadcasters do not need a reminder to understand the frequency congestion that approximately 80% of stations face on a daily basis, as news coverage intensifies nationwide. The job of the frequency coordinator, once an intermittent offhour volunteer task, in many cities is now a stressful and intensive daily project.

New technologies have been developed, such as digital compression, IR and fiber-optic links, but it will be years before these techniques will be commonly available. In addition, these new technologies have their limitations. There are also implementation options, such as the split-channel plan, that can reduce interference. Even so, increased channel spectrum use requires tight coordination. Also, bear in mind that the electronic news-gathering operations are usually not performed under ideal conditions. It's important to recognize that further sharing of any of the existing broadcast auxiliary spectrum will be harmful to the broadcast industry because electronic news-gathering will be impacted.

It's obvious (at least to most broadcasters) that our industry cannot function without adequate BAS spectrum. And if today's crowding isn't enough, the addition of multichannel and HDTV operations will create further pressure for more BAS operations — and the need for additional spectrum or the coverage of news will suffer.

Louis Libin is a broadcast/FCC consultant in New York and Washington.



PURE VERSATILE UNCOMPRESSED AFFORDABLE

Sierra Design Labs is the worldwide leader in long-format, uncompressed digital video storage technology. We offer our customers a range of products that simultaneously meet uncompromising demands for VTR replacement, graphics, effects, animation, editing, compositing, telecine and on-air playback.

Unrivaled versatility...pristine uncompressed digital video...industry standard interface connections between computers and video.

It's more than a box. It's a set of solutions, a group of building blocks that you can use today while creating your facility's video server of the future.

It's the most advanced and obsolescence proof set of uncompressed digital video storage solutions available. It builds a bridge to the future and it all works today.

It's Real.



Video server building blocks from Sierra Design Labs

Voice: 800.400.8002 Fax: 702.831.5710 www.sdlabs.com Sierra Europe Voice: +31.318.548546 Fax: +31.318.548415

Circle (7) on Free Info Card

www.americanradiohistory.com







Introducing the Origin™ video computing platform from Silicon Graphics. It's time you had everything you wanted, everything you needed and everything your competitors didn't want you to have in one, rack-mountable, digital broadcast platform.

Time will tell which digital video formats become the standards of our industry, so the Origin platform supports them all. From the biggest uncompressed formats to the most multi-channel playout streams, from HDTV to low bit-rate MPEG, run them all today.

Time also changes everything, so we've





given the Origin platform more scalability and flexibility than any dedicated box. Store months of on-line video, fast-network to any local desktop, run world-class applications, support standard automation systems and StudioCentral™ asset management environment. Want advanced graphics? Origin will let you add it. That's power and flexibility.

When you're ready to see what the best system in the industry can do, visit us on the Web. But don't wait too long. Time is money and of the two, we can only make you more of the latter.



Selecting a video server

ngineers charged with selecting video servers are faced with dozens of choices ranging from generic systems offered by computer makers, to highly specialized systems developed by vendors targeting specific markets. That's why it's important to clarify your system's requirements by asking the tough questions:

- What type of video server is required (VOD, NVOD, TVOD, IVOD)?
- How many hours do you need to store?
- What type of encoding will be used?
- What type of network will be used?
- System architecture.

What type of video server is required?

Determining the type of video server you need depends upon what type of video-on-demand (VOD) defines your application. Understanding how video can be delivered can help you select the right video server.

In near video-on-demand (NVOD), a content title can be associated with multiple video streams — with each video stream started at fixed intervals.

True video-on-demand (TVOD) is an improvement. With TVOD, a content title can be associated with multiple video streams, with each video stream started immediately upon user request.

Interactive video-on-demand (IVOD) provides users with full access and interactive control of the video information whenever they desire. Users can also enjoy VCR-type control functions. Different types of VOD applications require different types of servers. A server suitable only for NVOD may be unable to respond quickly enough to user commands in an IVOD application.

How much capacity is enough?

The number of video streams that must be concurrently delivered is an obvious factor. An even more important factor is the type of encoding used. The type of encoding will affect the amount of storage required.

Consider the encoding

Your next challenge is determining content storage requirements. Storage capacity is the largest influencer of video server costs. How many titles are needed? What is the average length of each title? How many hours do you need to store?

The video encoding method also must be considered. Variable bit-rate encoding can significantly decrease

content storage requirements, compared with constant bit-rate encoding. However, most video servers do not support variable bit-rate encoding.

What kind of network is required?

A video server must also be able to connect the network distribution system. If analog video streams are to be distributed, you'll need MPEG decoders on every output. If digital video streams are required, the video server must be able to properly interface with your distribution system.

The video server must be able to support communications with client devices, such as PCs or intelligent set-top boxes. Be sure your selected server supports the appropriate application binary interface (ABI), such as DAVIC's DSM-CC.

System architecture

Pay special attention to specific system architecture features. The tasks performed by a video server are input/output intensive. Accordingly, the ability to handle multiple and independent I/O channels is more important than the speed of the CPU.

VOD, particularly TVOD and IVOD, requires fast and predictable response to user requests. A real-time system that is optimized to respond quickly and deterministically to random and unpredictable real-world events is a superior platform for VOD.

Video data is large and is generally accessed sequentially. Video server operating systems that include video-specific enhancements to handle the unique characteristics of video data are preferable.

The addition of a video file system that optimizes access to video content is invaluable. A video server that includes direct input/output as a complement to buffered input/output optimizes video data throughput. Operating systems that include in-kernel buffer management to move video data directly from content storage to network buffers can also increase performance.

Know your goals

Establishing a clear picture of what your server must do and working with vendors to answer your questions will help you make an intelligent video server purchase.

Del Kunert is director, Interactive Video-on-Demand Business Area Team for Concurrent Computer Corp. in Ft. Lauderdale, FL. He can be reached at 732-870-4309 or del.kunert@mail.ccur.com.



Serious SDI Testing

Tests both active video and auxiliary data portions of SDI signal and displays embedded audio stream numerically or as a waveform for easy recognition of proper test tones. 'Stop on Error' trigger catches auxiliary data embedding errors and embedded audio errors.

Jitter injection, amplitude attenuation, and error injection tell you if interconnections have enough headroom.

Confirms strict compliance with SMPTE and EBU standards.

Edge diagram of digital waveform. Clearly displays waveform shape and jitter. Fast, automatic eye-diagram waveform measurements are readable from remote control port.



Long-term digital error logging can grab 400 complete errored frames for unattended burn-in and overnight testing.

Built-in test pattern generator provides

stimulus and analyzes results conveniently. You get 32 test patterns and the ability to grab, create and store up to 400. The DVA184C

Advanced jitter features include FFT analysis with automatic measurements, output BNC connectors for demodulated jitter and reference clock to identify 'fingerprints' of jitter sources.

It's all here. Complete digital SDTV and widescreen testing at 270 and 360 Mbps, all in one very serious instrument that's also easy to use. The DVA184C is so accurate, fast and conclusive, you can bring systems up in much less time, ship product on schedule, and nail equipment incompatibilities before they nail you. Plus, the DVA184C has been well-proven, with demanding folks like HBO, ABC and SGI. Give us a call at 650-364-1853, or hit our web site today.



www.synthesysresearch.com

Circle (15) on Free Info Card

www.americanradiohistory.com

Selecting test equipment for digital systems

It takes more than a VOM to test today's digital systems.

By Kenneth Hunold

THE BOTTOM LINE:

As digital systems change from islands to oceans surrounding analog islands, test procedures also need to change. To properly test digital systems, engineers need knowledge and digital-ready test equipment. \$

t has been said before that no matter what the VTR, HDTV or video server format of tomorrow will be, tomorrow's TV system will be digital. It has also been said, when referring to testing and measuring digital TV systems, "Don't worry... it's digital!" Although the first statement is probably true, the second could not be farther from the truth. Digital systems need to be tested just as much as analog systems (albeit for different responses). Also, brand-new, all-digital systems are rare, even today. New digital installations are most often built within existing analog infrastructures and must interface with the existing analog facility. It is important to test the facility as if it was an analog facility and also as a digital facility. Depending on the mix of analog and digital systems, the order in which to test for analog and digital compliance may vary. It is important to realize that both

Selecting test equipment for digital systems

tests must be carried out, effectively doubling your initial proof-of-performance test time.

What to test and why

Digital systems must be tested just as much as analog systems. Only the nature of the test and the equipment used to perform the tests is different. Digital television is only now entering the phase of development where most digital video equipment properly interfaces with equipment made by other vendors. However, this interoperability is not universal. In instances of finger-pointing between (or among) vendors, it is often left up to you — the customer — to determine digital blame and how to proceed toward compatibility. A good place to start is with standards developed by organizations with established standard-setting procedures, either national or international. These organizations include SMPTE, AES, ITU (formerly CCIR) and ANSI. Armed with these manufacturer-neutral and committee-balloted standards (and they can be quite an arm full!) you can begin to referee compatibility issues at your facility.

For standard-definition video systems, the document referred to most often is SMPTE 259M-1993, which covers the serial transmission of digital video signals. Serial transmission is the most popular digital video interconnection method. The SMPTE 259M standard covers multiple line rates and data rates including, but not limited to, 143Mb/s for composite digital systems (e.g., D-2 and D-3 VTRs), 270Mb/s component digital systems (D-1, D-5 and other VTRs) and 360Mb/s 18MHz-sampled component digital systems (D-5 VTRs). Test equipment capable of measuring SMPTE 259M signals is considered an absolute necessity in today's digital facilities.

Today's test equipment includes a variety of functions. Depending on how far your facility's transition to digital has progressed, different types of test equipment could be needed at different stages. If serial digital distribution is used throughout, then serial digital versions

of most of the monitoring equipment will be required. At one end of the cost and sophistication spectrum, all that might be required is a simple continuity monitor. Often, this device serves as nothing more than a waveform monitor for the digital signal. It confirms signal presence and little else. At the other end of the cost and sophistication spectrum is the digital analyzer. In addition to waveform monitor capability, these devices can also analyze the signal at the interface level.

Routine monitoring of the signal for continuity and video content can be accomplished either with a purposebuilt SDI monitor or, perhaps on a temporary basis, an appropriate quality D-to-A converter could feed your existing monitor system. This raises the question of whether implementation plans call for a composite digital or component digital facility. Although SMPTE 259M can be used for either composite or component digital systems, it is usually a good idea to keep the

Standards documents

Standards documents are necessary to define the details of complex systems and ensure stable and reliable operation. Listed below are standards documents from professional organizations that may be helpful in defining and describing TV audio and video systems.

AES standards:

- AES.3-1992 (ANSI S4.40-1992). Transmission of two-channels periodically sampled and uniformly
 quantized audio signals on a single twisted pair cable. User and interface related data may also be
 transmitted. This is a revision of the original 1985 document.
- AES-3id-1995. This information document (id) describes transmission of AES3-formatted data over unbalanced coaxial cable.
- AES10-1991 (ANSI S4.43-1991). Serial Multichannel Audio Digital Interface (MADI). This standard is for transmitting multiple AES3 channels over a 75Ω coaxial cable or optical fiber. This interface is becoming popular with digital console and multitrack recorder systems. Up to 56 channels can be transmitted.
- AES14-1992 (ANSI S4.48-1991). XLR-type connector gender and polarity. This standard specifies
 a common scheme for wiring XLR connectors in audio systems.
- AES17-1991 (ANSI S4.50-1991), Measurement of digital audio equipment. This standard specifies
 methods for verifying the performance of digital equipment. Many tests are almost identical to those
 used when testing analog equipment. Because of the requirements of digital audio equipment,
 additional tests are included. This document is currently under revision.
- AES26-1995. Conservation of polarity of audio systems. This standard specifies the polarity of the signal at the different interface points in the audio chain, particularly for the acoustical, electrical and magnetic aspects.


SMPTE issues different kinds of standards documents. These include "standards," "recommended practices" (RP) and "engineering guidelines" (EG). Some of the relevant documents for analog and digital systems include;

- SMPTE 170M-1994 NTSC for studio systems;
- EG 1-1990 alignment culor-bar signal (SMPTE bars);
- SMPTE 259M-1993 bit-serial 4:2:2 interface;
- SMPTE 125M-1995 bit-parallel 4:2:2 interface;
- SMPTE 244M-1995 bit-parallel NTSC composite interface;
- RP 165-1994 error detection check words and data flags (EDH);
- RP 184-1996 jitter specification;
- RP 192-1996 jitter measurement;
- EG-33 jitter characteristics and measurement;
- SMPTE 276M-1994 AES/EBU audio over coaxial cable (similar to AES-3id):
- EG 32-1996 AES/EBU emphasis and preferred sample rate;
- SMPTE 292M-1996 bit-serial 4:2:2 high-definition interface;
- SMPTE 240M-1995 analog HDTV production system 1125/60;
- 5MPTE 260M-1992 digital HDTV production system 1125/60;
- 5MPTE 274M-1994 1,920x1,080 HDTV scanning 60Hz; and
- 5MPTE 296M 1,280x720 scanning 60Hz (this document has not been finalized);
- ANSI/EI/VTIA 250-C-1989 Electrical Performance Standard For Television Transmission Systems. This is the standard that all common carriers and most TV networks must comply with. Although there is no digital performance specification that is analogous to 250-C, this standard is often applied to the analog I/O of digital systems.

Standards documents are available from:

Society of Motion Picture & Television Engineers Standards Department 595 W. Hartsdale Avenue White Plains, NY 10607-1824 Phone: 914-761-1100 Fax: 914-761-3115 eng@smpte.org http://www.smpte.org

Audio Engineering Society
Special Publications Department
60 E. 42 Street
New York, NY 10165-2520
Phone: 212-661-8528
Fax: 212-682-0477
HQ@aes.org
http://www.aes.org

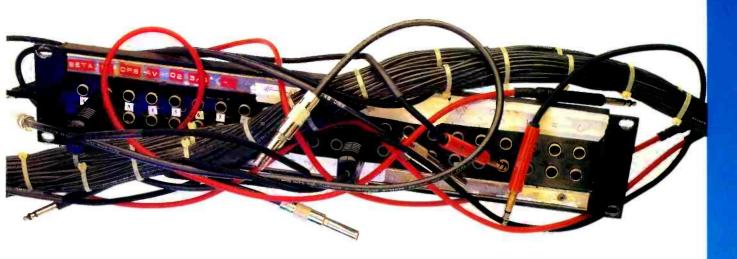

We've pulled the plug on the patch bay.



Calibar. The pocket-sized NTSC test signal generator.

Until now, you had two choices when it came to video calibration equipment—the rack-mounted system or desktop-sized system. Serviceable, sure... but hardly convenient. Because while it sits in the patch bay, you run around plugging umpteen cables in and out to get the readings you need. And on location? Forget it.

But now, there's Calibar.

It's the fastest, easiest, most portable way to calibrate video equipment. No patch bay racks or bulky, oversized test equipment. And no limits to where you can use it. So, besides giving you fast accurate readings in the studio, it's perfect for off-site events and trouble-shooting in the field.

Just tuck the pen-sized Calibar in your pocket and you're ready to go. Touch the button to generate SMPTE color bars. Touch it again to calibrate

convergence, do a line sweep, read color fields and so on. With its 10 bit digital architecture and precision output, Calibar accurately performs 24 test pattern functions...that's as many as most rack systems.

It's fast, easy, and, at *under three ounces*, extremely portable. Just try taking your rack-mounted system along.

And speaking of small, Calibar costs a fraction of a rack-mounted system. So if you're ready to pull the plug on your old system, **call: 1-800-843-8934** for more information.

www.newtek.com

1-210-370-8000 Fax: 1-210-370-8001 Anonymous FTP site: ftp.newtek.com



All trademarks and registered trademarks are the sole property of their respective owners. © Copyright, NewTek, 1997.

Circle (25) on Free Info Card

Selecting test equipment for digital systems

big picture in mind and make a facilitywide choice whenever possible. This decision needs to be consistent with equipment depreciation and other economic and technical trade-offs.

At the interface level, the SMPTE 259M signal must be monitored for peak-topeak amplitude, rise time, overshoot and jitter. These tests determine the quality of the hardware used to serialize the signal. They can also give a clue to the stability of the clock circuits in the originating hardware or any other signal reclocking or regeneration stages. Once the signal is passed through a transmission device (which could be a DA, coaxial cable or coast-to-coast fiber/satellite link), the signal needs to be checked at the receive end. A common indicator of digital signal health is the "eye pattern." It is used as an indicator of how well a device will be able to differentiate between the states of the interface. The more separation between the upper and lower states and the sharper the transition between the two states (which both determine how "open" the eye is), the better a serial receiver will be able to determine the difference between the two states of the signal. Most serial receiver chipsets include an automatic cable equalizer to correct for the highfrequency roll-off of the coaxial cable. It

For more information

For background information, read these related articles in *Broadcast Engineering*:

"Transition to Digital: Testing Serial Digital," Parts 1&2, August and September 1997.

"Testing Digital Systems," November 1996.
"Testing MPEG-Compressed Signals," Febru-

"Testing MPEG-Compressed Signals," February 1996.
"Transition to Digital: Testing Serial Video."

"Transition to Digital: Testing Serial Video," November 1995.

"Testing Fiber Systems," November 1994.
"Production Clips: Production Test Equipment," Parts 1&2, August and September 1994.
"Automated Testing for Video," November

"Testing Audio — Automatically," November

"CCD Camera Testing," sidebar to "The Latest in CCD Camera Technology," July 1993.

"Performance Testing of Digital Audio Equipment," November 1992.

"Ruggedness Testing for Transmitters," November 1992.

"Multitone Audio Testing," July 199 .

is this equalizer that allows the digital signal to be transmitted over cable distances varying from a few inches to a thousand feet.

Digital test equipment must also allow you to check the quality of the original A/D conversion. Because a signal, once digitized, is difficult to modify, it is imperative that the original conversion from analog to digital be done correctly. SMPTE 259M specifies how digital video signals are serialized into a single bitstream for transmission. In order to fully examine a digital signal, it is often necessary to examine the individual samples. ITU-R Recommendation 601 describes how an analog video signal is to be sampled. The continuously varying analog signal must first be broken down into a series of discreet samples. These samples are then quantized, resulting in a number that describes the signal amplitude at that point in time. This number can be expressed to a certain precision by using a certain number of bits, typically eight or 10 for video signals. This allows you to see exactly what the "video level" of the signal is, limited only by the number of bits used to describe the signal. For the luma portion of the component digital signal, "100%" is equivalent to a 10-bit sample value of 940 (decimal), and black level is equivalent to a sample value of 64 (decimal).

SMPTE 259M also defines certain nonvideo codes that are used in the system. In component digital systems, horizontal sync pulses are replaced by numeric codes reserved for synchronization signals. Test equipment should detect these codes and also indicate if they occur when they are not expected. The portion of the signal outside the active video portion (in what could be considered the horizontal and vertical blanking interval of an analog signal) can be used to transmit other digital data. This ancillary data can include audio, time code, CRC checksums for error detection and other data. This data should be available for inspection and possible analysis, depending on the intended use and location of the test equipment.

Don't forget the audio

Similar to digital video, digital audio signals must be monitored at the audio level and the interface level. The most

common digital audio transmission standard used in broadcasting is AES3-1992. It describes the coding that digital audio signals should use for transmission. Again, just like the video signals, the signal must first be sampled and quantized into discrete values. Common sampling rates include 44.1kHz for CDs, 32kHz for some radio transmission systems and some consumer DV systems and 48kHz for almost all other professional applications. Common quantizing resolution values include 16-bits per sample for CDs, 18- and 20-bit converters for digital disk recording and digital VTRs and up to 24 bits for "audiophile" systems. The AES standard allows for a maximum of 24 bits of audio data to be transmitted. Once these samples are made, the analog values must be quantized into a discreet value. The number of bits used to describe the digital audio value is determined by the A-to-D converter. Currently, most audio systems use less than the full 24 bits allowed by the standard. Test equipment that shows the number of active bits is useful to tell if any processing equipment is truncating, or reducing, the number of databits describing the audio signal, thereby reducing the resolution of the system and adding distortion.

Many times, all that is desired is to do traditional analog audio testing on signals that exist in the digital domain, e.g., frequency response, THD+N, noise floor, etc. Typically, you are measuring the quality of an A-to-D conversion. Although not trivial, current DSP technology certainly makes such analysis feasible. In addition to testing the accuracy of the data used to convey audio, the actual interface itself must be checked, as in digital video systems.

Audio test equipment must be able to measure the AES interface for parameters similar to those parameters measured on the video interface. These parameters include p-p level, rise and fall time, overshoot and jitter. Beyond that, test equipment should be able to detect bit activity and decode status byte information. If the information contained in the status bytes does not agree with the actual condition of the interface, problems could occur. For example, compatibility problems can arise when a device receives a 48kHz-

Our Systems have earned their reputation for a very good reason...



...each component is strong enough to stand out on its own.

Philips BTS has become famous for producing innovative products, offering major advances in technology and providing a unique set of advantages for addressing today's complex operating challenges.

When you combine these products into a Philips BTS system solution, you are getting the most powerful system available—a fully integrated package with the features you need today and the flexibility to adapt to the changes that will come tomorrow.

Find out yourself why Broadcast, Cable, and Satellite facilities around the world have chosen Philips BTS for their on-air systems requirements.

call us today at: 1-800-962-4287 e-mail us at: sales@mail.phbtsus.com visit our website at: www.philipsbts.com




I)IGITAL MULTICASTING



PHILIPS

Let's make things better.

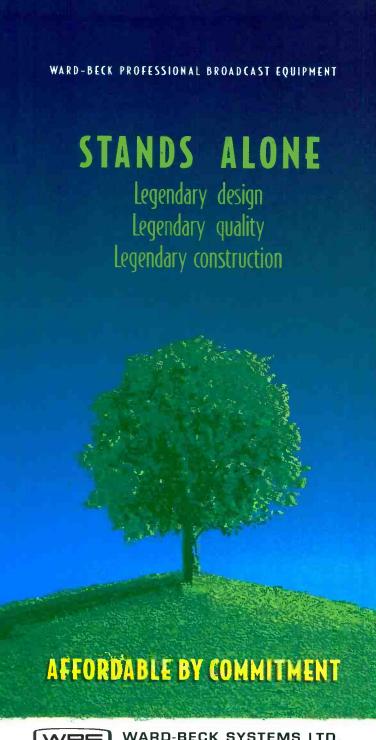

WARD-BECK SYSTEMS LTD.

TORONTO, ONTARIO, CANADA M1H 2X4 TEL: (416) 438-6550 FAX: (416) 438-3865 TOLL FREE 1-800-771-2556 website: www.wbsltd.com e-mail: wbsltd@istar.ca



The secret to lowering costs, improving performance, is knowing with whem to consult. Make Ward-Beck your first call.

> Audio Consoles Digital Audio Products, Analog Audio Broadcast Problem Solvers. Startgard and Custom lines.

> > Circle (27) on Free Info Card

Selecting test equipment for digital systems

sampled signal, but the status bytes indicate that the signal sample rate is 44.1kHz.

Audio monitoring moved beyond the VU meter a long time ago. Stereo introduced two channels (and meters), as well as phase and polarity concerns. "X-Y" monitors became popular for phase measurements and evolved into "sound-field" monitors. This type of monitor places the L and R axes at 45° either side of vertical to indicate stereo placement. DTV will bring an increase in the number of channels that can be transmitted. This increase to six-channel audio (used in the 5.1 channel ATSC transmission system) will raise many questions and concerns about how to monitor these audio channels for maintenance and production. Some designs that have not been used since the "quad" days may have to be dusted off. (That's "quad" as in quadraphonic sound, not quadruplex VTRs!) Apart from just an increase in the number of channels, operational, maintenance and transmission monitoring of this new format will be a challenge that has largely not been met by current products.

HDTV is right around the corner

What about the future? In addition to dealing with the operational needs of producing 5+ channel sound, the digital interface used tomorrow will be different from the digital interface used today. For HDTV signals, the data rate for the 1080I and 720P signals is approximately 1.5Gb/s. This is more than four times the highest data rate supported by SMPTE 259M. A new standard, SMPTE 292, has been developed to address serial HDTV transmission via coaxial and fiber-optic cable. There are many similarities between the two standards, and similar parameters will need to be checked, although at a much higher data rate. Test equipment for this interface is rare today, but it is hoped that interface tests and data analysis similar to what we currently perform on SMPTE 259M will also be able to be carried out on the new HDTV interface.

The trick to selecting test equipment for digital systems is to categorize the types of measurements that need to be made in each operating area. Not every operating area needs the detailed analysis tools that a maintenance area would require. Also, tools used in the construction and commissioning of digital facilities are different from the tools used in a day-to-day operating environment. Digital signals do not need to be checked for level and frequency response on a daily basis (although these tests can provide an operator with a comfort zone and a reality check). It is, however, important to make sure that analog levels are properly converted to digital. Many of the new pieces of test equipment include data analysis tools that are new to engineers who were formerly required to test analog facilities. We will need to test digital systems just as rigorously as their analog predecessors. Although we will be looking at different parameters with different tools, the end result, the best signal quality possible, remains the same.

Kenneth Hunold is an audio/video project engineer for the ABC Engineering Laboratory, New York.

Meet The Digital Detectives

Video's First Serial Digital Analyzing System
That Captures Signals, Injects Test Errors
& Helps Bridge The Gap.







Whether you are testing SDI transport path, verifying digital video protocol or performing quality assurance checks on program material, Leader's new "Digital Detectives" are a dynamic solution for meeting SDI testing needs. Designed to operate in today's "transition" environment where analog and digital are present, these advanced design instruments provide superior flexibility and ease of use for quick, painless transition from analog to digital. Yes, each "Digital Detective" is a stand-alone product, but...the sum is greater than the parts!

For example, the LT 5910 SDI Analyzer delivers every capability for routing path and protocol analysis. What's more, it acts as a signal source to permit deliberate introduction of digital video errors into the data stream in order to test your system's ability to identify and deal with errors. Error capture and an extensive set of alarms facilitate

24 hour monitoring. Simultaneously, error capture permits detailed troubleshooting of intermittent faults.

Monitoring actual video signals is the job of the versatile LV 5100D. It has 2 serial and one analog (3-wire) inputs and works well in multi-format environments. Extensive cursors and data readouts facilitate quick, errorfree analysis using familiar analog displays to ease the transistion to digital. The LT 425D generates all the signals and test patterns needed to become a precise master source for digital component reference and signal testing. Multiple SDI and analog black outputs simplify use with multi-formats. Compression test patterns include provisions for future test needs, while the built-in AES/EBU (separate and embedded) satisfies audio test requirements.

For a close-up look at the "Digital Detectives," or for further details, call Leader's system integration specialists...

1-800-645-5104 / www.leaderusa.com



Circle (28) for Product Information Only Circle (29) for Product Information & Demonstration

Leader Instruments Corporation, 380 Oser Avenue, Hauppauge, New York 11788
Regional Offices: Chicago, Dallas, Los Angeles, Atlanta. In Canada call Omnitronix Ltd., 905 828-6221

Maintaining satellite equipment

It's no fun fixing a dish when it's 10° below zero with 12 inches of snow on the ground.

By Philip Hejtmanek


THE BOTTOM LINE:

Over the last 20 years, satellite delivery of program and commercial material has virtually replaced landline and package delivery. Although fiber-optic capabilities have changed that somewhat, satellite delivery remains critical. Loss of satellite equipment can cripple a facility, either directly through loss of primary programming or indirectly through loss of feeds intended for later broadcast. Proper maintenance can prevent failures and minimize downtime. \$

Photo: Periodic inspection and tightening of components connections are critical to maintaining system reliability. atellites in geosynchronous orbit are extremely effective platforms for point-to-multipoint distribution of broadcast program material. Nearly all broadcast facilities in the United States have at least one satellite receive terminal. These terminals typically are used daily to acquire network feeds, syndicated programming, weather data or news. Some stations also have uplinking capability, allowing them to send program material or data to a satellite for reception by others. All too often, though, station operators install this mission-critical equipment and promptly forget about it — until the day it fails. Simple maintenance procedures done on a regular basis can easily prevent unexpected downtime.

Broadcast satellite facilities can be divided into two general types: *fixed* and *mobile*. Most stations have at least one example of a fixed receive system — the network or syndicated program downlink. Often, these systems feature a simple fixed-dish antenna locked down on a single satellite, but many facilities have motorized satellite antennas, capable of steering to multiple satellites. Fixed systems can be either receive-only or transmit/receive. Some receive-only systems feature antennas with spherical (rather than parabolic) reflectors, capable of receiving multiple satellites at the same time.

Many TV stations and networks also operate mobile satellite systems. One of the most common is the Ku-band satellite uplink truck for news operations. Additionally, a significant number of C-band mobile uplinks are used mainly for sports or network backhauls. In many cases, these large, full-bandwidth analog trucks are giving way to smaller systems that rely heavily on digital compression technology to

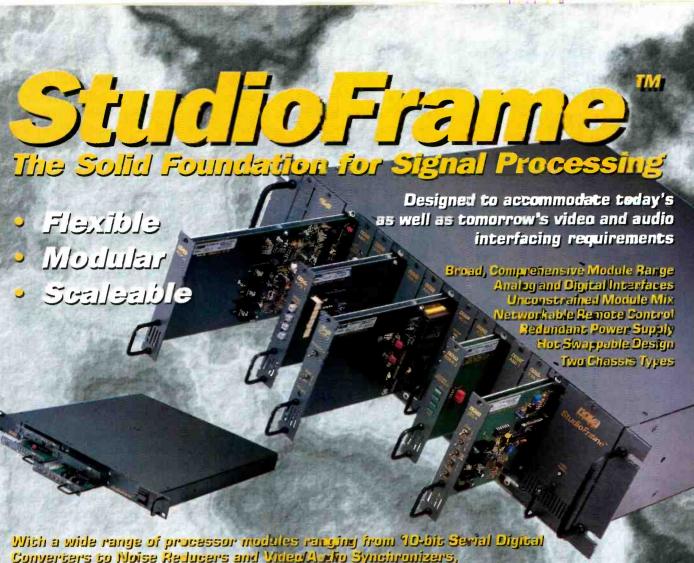

Converters to Noise Reducers and Video/Actio Synchronizers, Nova's StudioFrame provides the most comprehensive signal processing system available.

Serial Digital รับแบลเรอ.ช 504-1 504-3 当り出土

RGS or Component Video පෙ 7/5 කරේ ජීවාගුවන්යෙ Wileo Engoder

Median Noise Reducers לב-גלעועו בעובונועו























INNOVATORS IN SIGNAL PROCESSING

VIDEONICS COMPANY

50 Albany Turnpike, Canton, CT 06019 860-693-0238 FAX 860-693-1497 860-693-0238 http://www.nova-sys.com

© Copyright 1997, Nova Systems Circle (30) on Free Info Card

Maintaining satellite equipment

reduce bandwidth and power requirements. Naturally, the maintenance problems with all satellite trucks are compounded by the fact that the equipment is subjected to the rigors of the North American highway system, along with countless potholes. There are also flyaway Ku-band systems, which are uplinks in a shipping case, ready for deployment anywhere in the world.

Set a maintenance schedule

The best way to make sure that satellite equipment is properly maintained is to set a maintenance schedule and stick to it. Virtually all manufacturers of satellite equipment recommend that checks and maintenance steps, such as lubrication, be done at regular intervals. It is well worth the extra effort to log test point values and meter readings following the installation of new equipment. Then, changes in parameters from the nominal values can indicate potential trouble spots.

Because elements of a fixed satellite terminal are installed outside, it is best to perform outside work when the weather is favorable. Anyone who has done significant work on a satellite dish in the dead of winter understands this firsthand. One unavoidable task for those in northern locations is sweeping snow out of unheated satellite dishes. And, at any time of the year, high winds may move an antenna and necessitate repointing.

A fixed system consists of an antenna, an antenna controller (in the case of motorized dishes), a feed system, an interfacility link and receive-only or transmit/receive electronics. The electronics segment of a receive-only system could be a simple receiver/demodulator, an integrated receiver-decoder (IRD) or separate receiver and decoder components. A majority of satelliteborne communications systems feature encryption for security purposes, so the decoder is often a key element. Transmit/receive systems feature similar receiver elements, in addition to encryption encoders, RF exciters and

high-power amplifiers. C-band transmit systems frequently use klystron amplifiers at 6GHz, with output power measured in kilowatts. Ku-band transmit systems generally have traveling wave tube amplifiers (TWTAs) with output power levels from 100W to 300W at 14GHz.

Mobile systems have an additional element to consider—the maintenance of the prime mover, as well as the electronics and antenna. Vehicle manufacturers have specific maintenance



For the safety of those involved, always remove power from the drive motors before starting any maintenance.

schedules established for their products, and it is wise to follow them.

Maintaining fixed antenna systems

When it comes to maintenance, the simplest part of a satellite system is often forgotten. Once the satellite antenna is properly installed and aligned, it is frequently ignored. The antenna is often the most difficult element to service; freeing up a stuck 9m dish in a snowstorm can be tough. For that reason, this is the system element that probably deserves the most attention.

Non-motorized satellite antennas typically require little maintenance other than general cleanup. Sometimes, strong winds can move an antenna away from the correct positioning, so repointing is needed. Always try to repoint an anten-

na while the desired satellite is in the "center of box" (satellites drift around their nominal position slightly). Information about satellite drift and center-of-box timing is available over the phone from the satellite controllers.

The first step toward ensuring reliable operation of a motorized antenna is a periodic visual inspection, general cleaning and lubrication. The reflector, feed system, motor assemblies, jack-screws and base should be closely examined for loose or missing parts or

bolts. Thermal cycling and normal motion can easily loosen up fasteners. Mechanical components can be cleaned with a stiff brush, cloth or compressed air. Corroded parts or hardware should be cleaned or replaced. Loose screws or bolts should be torqued to the manufacturer's specifications.


Maintenance is also important to the electrical components of a motorized reflector. Azimuth, elevation and polarization motor drive systems should be exercised periodically, and limit switches should be checked for proper operation. All AC wiring and control cables should be checked for cracked, discolored or burned insulation. These symptoms usually indicate overcurrent conditions or poor connections. Load center circuit breakers for the drive motors, as well as the ground fault protectors for accessory AC duplex outlets, should be checked for safe and positive operation. Tighten ter-

minals and connections at the load center and electrical junction boxes associated with the motor drives.

It is a good idea to record the operating AC voltages and currents for each of the phases in a motor drive circuit upon installation and then at periodic intervals. Deviation of more than 5% from the installation values can indicate troubles to come. Electrical enclosures should be opened and the insides checked for watertight integrity and signs of arcing or discoloration.

Jackscrews, motors, gearboxes, bearings and pivot points should be lubricated to manufacturer's specifications at the specified interval. The rubber boots on jackscrews should be inspected for cracks or tears. In corrosive saltwater environments, exposed fas-

NO OTHER BROADSAST VIDEO SERVER DELIVERS MORE.

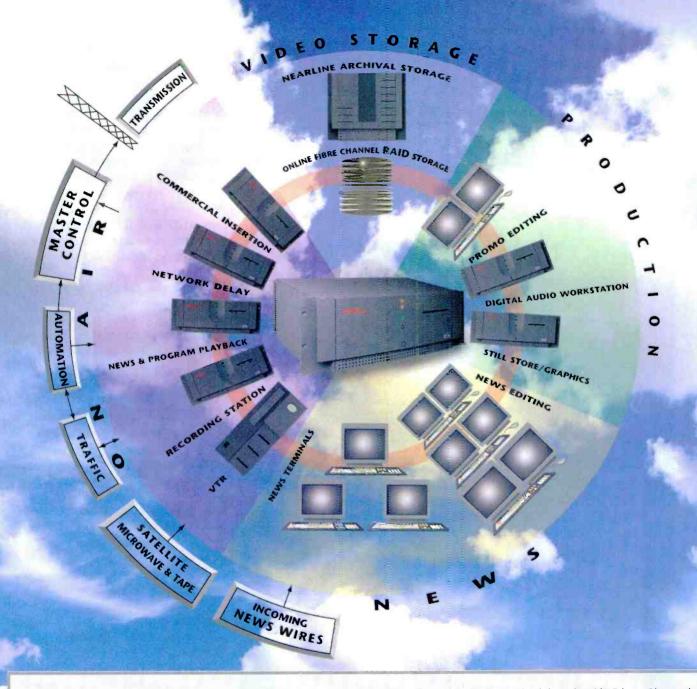

ASC's VR300™ Broadcast Video Server is more flexible, more scalable, and more reliable. With 1,066 Mb/sec available bandwidth, it provides up to 24 simultaneous channels and 96 hours of online digital storage.

VR300's building-block approach makes it easy to expand channel capacity without purchasing unneeded storage. ASC's open systems design ensures compatibility with leading automation and newsroom systems.

VR300 features hardware redundancy, software RAID technology, and *FibreDrive*,™ ASC's exclusive Fibre Channel architecture.

FibreDrive incorporates high-bandwidth Fibre Channel RAID starage to eliminate bandwidth restrictions, SCSI bottlenecks, and single points of failure. Direct access to digital storage means last minute changes can always be made easily and instantly.

With no tapes to transport and no data files to transfer, VR300 takes integrated digital operations to new heights.

For more information, call 818-843-7004 for a free white paper, "The FibreDrive Difference."



Maintaining satellite equipment


teners and hardware should be treated with an anti-corrosive spray or compound to minimize long-term damage. Always remove electric power from motor drives before servicing them. Serious injury or damage could result if the antenna was inadvertently moved during maintenance.

Caring for feeds and interfacility links

Feed windows and horn assemblies should be closely inspected for dirt or foreign objects. Birds, wasps and bees have been known to nest in feed systems, resulting in poor receive system performance. Obstructions in transmit feed systems can result in excessive VSWR and possible amplifier damage. Low-noise amplifiers and downconverters should be checked for proper operation and weatherproofed.

Interfacility links (IFLs) are basically transmission lines that connect the antenna system to receivers or power amplifiers. Most receive systems use coaxial cable for this purpose, while transmit amplifiers are generally connected to the feed through the use of a waveguide. Waveguides are usually pressurized with dry air or nitrogen to prevent moisture from entering. A regulated positive pressure of about 0.5 psi, even in the case of a small leak, will usually keep the water out. Loss of gas pressure in the nitrogen tank is a sure sign of a leak. Leaks most frequently occur at rotary joints or flexible waveguide sections, especially in the area of the feed. IFL connectors should be clean, tight and waterproofed to minimize VSWR losses.

BROAD CAST

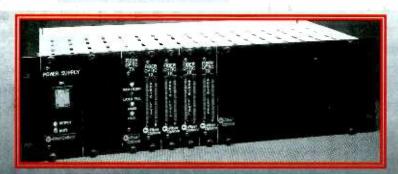

A 12-BIT DIGITAL TRANSPORT SYSTEM

The 1250SB fiber optic transmission system exceeds your RS250C short-haul performance expectations. Digital Processing; 12-bit video and 20-bit audio insures transparent transmission of composite video and up to eight channels of audio. Designed for use within broadcast facilities and remote field production.

12-Bit Video: RS250 Short Haul.
20-Bit, 48 kHz Sampling; THD - 110 db.
Up to 8 Channels of Audio.
Audio SNR 91 dB; Video SNR 70 dB.
Differential Gain 0.2% and Phase 0.2°.

For more information on the 1250SB series and other Broadcast and Professional Video products contact...



80 Orville Drive • Bohemia, New York 11716-2533 (516) 567-8320 • 1-800-342-3748 • fax: (516) 567-8322 E-mail us at: info@fiberoptions.com or visit our Web site at http://www.fiberoptions.com

Circle (17) on Free Info Card

Transmit and receive electronics

Maintaining satellite terminal electronics is much the same as for maintaining other equipment types. In general, if adequate airflow and cooling is available, the equipment should operate properly. It is important to change air filters associated with power amplifiers at regular intervals, typically on a quarterly basis, depending upon the environment. Air-conditioners and heat exchangers should be kept unclogged for maximum efficiency. High-voltage power supplies and amplifier assemblies need to be vacuumed (with the power turned off, of course) and all connections tightened at least twice a year. In general, most of the same procedures used in broadcast transmitter maintenance hold true for satellite equipment.

Modern RF exciters and solid-state amplifiers require little maintenance, but it is prudent to check carrier and subcarrier frequencies and RF power levels on a quarterly basis. A monthly log of amplifier meter readings is an invaluable resource when troubles crop up. A good spectrum analyzer, frequency counter and RF power meter are essential tools for maintaining satellite uplinks.

Satellite receivers and IRDs generally need nothing more than a cool place to operate. The same holds true for encryption encoders, decoders and digital satellite modems. If encryption/de-





Get into Digital-S for less than \$10,000.

The high price of 4:2:2 digital seemed to be set in stone until JVC made it an affordable reality. But breaking that price barrier wasn't enough. Because now, our new additions to the Digital-S line-up put this dynamic format in the hands of even the most cost-conscious professionals.

e:2:2 digital stone until ordable realnat price barrier ause now, our ne Digital-S linete format in he most costnals.

and 1/2-inch metal particle tape. They're even DTV ready. The new members of our Digital-S family include the BR-D750 Editing Recorder priced under \$10,000, the BR-D350 Player for under \$8,000, and the DY-700 Camcorder for under \$12,000.

Digital-S. Powerful performance

at a breakthrough price. For more information, visit our Web site at www.jvcpro.com or call us at 1-800-662-1337.




ing picture quality and most of the high performance features you'd find on the rest of the Digital-S family. Like 4:2:2 component processing, 3.3:1 compression

Our new Digital-S components offer the same, astound-

14 WAYS TO BEAT

Rack buyers who are bored with the same old specs are finding NEW and exciting features to think about when they consider Winsted's VRx.

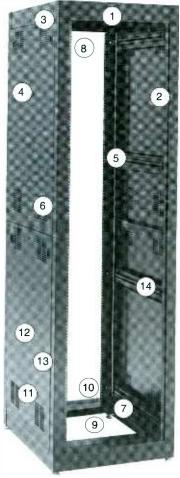

- 1. Mounting holes in top for eye-bolts
- 2. Fully adjustable rack rails
- 3. Heavy-duty welded construction.
 4. Lift-off side panels.
- 5. Tapped rack rails, front & rear.6. Black textured long-life finish.
- 7. Cable management system. 8. Conduit knock-outs, top & bottom.
- 9. Open top & bottom w/EIA rack rails.
- Two grounding lugs.
- 11. Venting top and bottom.
- Racks meet strict EIA standards.
- 13. Tested by an independent testing company.
- 14. 78-3/4" (45U) of usable rack space.

These new racks improve on long-standing industry standards and are built to last a lifetime. Call a Winsted design engineer at 800-447-2257 for a free consultation or..

For a FREE catalog, call or write: 1-800-559-6691



10901 Hampshire Ave. So., Minneapolis, MN 55438-2385 Fax: 612-944-1546 • Web site: www.winsted.com • email: racks@winsted.com

Preferred by Professionals Worldwide™

Circle (19) on Free Info Card

Maintaining satellite equipment

cryption equipment is mounted in a secure area, it is wise to affix a sign with key passwords and telephone numbers to the equipment; in the event an emergency re-authorization is needed, it can save time.

Keeping mobile satellite systems going

Packaging a complete satellite uplink/ downlink system into a vehicle often

results in airflow and cooling compromises. Equipment is typically closely packed in racks and supplemental air conditioning is a must. Many problems occur as a result of vibration caused by over-the-road travel. Close inspection of rack-mounted electronics is much more critical in the satellite truck. Coax connectors and AC plugs have an uncanny way of coming apart at the most inopportune times. Even the racks can become loose on a rough trip. Keep all air filters clean.

Vehicle maintenance is as important as electronic maintenance for a satellite truck. A good truck operator will make daily inspections of truck engine oil, brake fluid and tire pressure levels, as well as fuel system integrity. The motorized antenna systems used on uplink trucks are more com-

plex than those used in fixed systems and should be frequently inspected for proper operation and loose or missing parts. Leveling jack systems require periodic lubrication, and the AC electric generators onboard most trucks require periodic oil changes, lubrication and tune-ups. Circuit breakers should be checked quarterly for positive operation and periodic maintenance checks can prevent lost news shots or lost revenue.

Sometimes, the air for amplifier cooling is drawn from the outside, so special care should be taken to prevent condensation from forming in highvoltage power supplies, amplifier cavities and TWTAs. Arcing in these areas can cause major damage to expensive amplifier tubes.

Flyaway systems take the worst abuse - bouncing around inside packing cases while being shipped to the far corners of the world. Again, periodic maintenance can spell the difference between success and disaster. In flyaway systems, mechanical elements of the antenna and equipment packs should be inspected for lost or missing parts before each shipment. A flyaway system should always be set up and tested before it goes on the road. Inter-




Due to increased stress from vibration and weather extremes, mobile uplinks require frequent inspection and lubrication of mechanical components. (Photo courtesy of Southern Illinois University Broadcasting Service, Carbondale, IL.)

connect cables need to be tested and each case should be inspected for damage before the unit is shipped.

Maintenance is mostly common sense. Time spent on careful inspection and care of satellite equipment is worthwhile. Most problems are found before they can affect the operation of the equipment. Ignoring the need for periodic maintenance is false economy, and the payback for skipping maintenance can be disastrous.

Philip Hejtmanek is director of technical operations for WWJ-TV, Detroit, MI.

MAKING THE CONNECTION FROM ANALOG TO DIGITAL

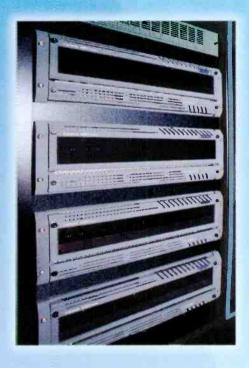

Genesis

The most comprehensive range of digital interface products.

Each GENESIS chassis accommodates up to 16 modules.

- Video Analog to Digital Converters
- Video Digital to Analog Converters
- Audio Analog to Digital Converters
- Audio Digital to Analog Converters
- Component Analog Converters
- Digital Encoders and Decoders
- Digital Frame Synchronizers

- Audio/Video Multiplexers
- Audio/Video De-multiplexers
- Digital & Analog Distribution Amplifiers
- Serializers
- De-serializers
- Fiber Optic Transmitters
- Fiber Optic Receivers



The total digital solution

1-888-TEKNICHE

E-Mail: 106307.1121@compuserve.com • Website: www.tekniche.com

East Coast Headquarters 100 Stonehurst Court Northvale, NJ 07647 PH 201-784-2288 • FX 201-784-3680

West Coast PH 818-955-9907 • FX 818-955-9908

11010-933-9907 • 17 010-933-990

© 1998 TEKNICHE

www.americanradiohistorv.com

Lossless editing with the "MOLE"


Editing MPEG without a loss in picture quality is difficult, but not impossible.

By Mike Knee & Nick Wells



Seamless concatenation can refer to the process of splicing an MPEG bitstream or the lossless concatenation of compression encoding and decoding operations. Within most MPEG-2 flavors, either operation is nearly impossible without restricting flexibility or increasing the bit rate beyond what would be considered efficient compression. However, the benefits are considerable and work toward this goal is ongoing. \$

Photo: Motion-compensation parameters in the MPEG bitstream can be analyzed using equipment such as the Snell & Wilcox MVA100 MPEG video analyzer. The overlays are split into two windows. The inner window shows lines representing direction and length of the first motion vector for each macroblock. The outer window's color overlays indicate the direction of motion compensation for each macroblock. Green indicates a forward predicted macroblock, red for backward and blue for bidirectional. Parameters such as these are preserved by the MOLE.

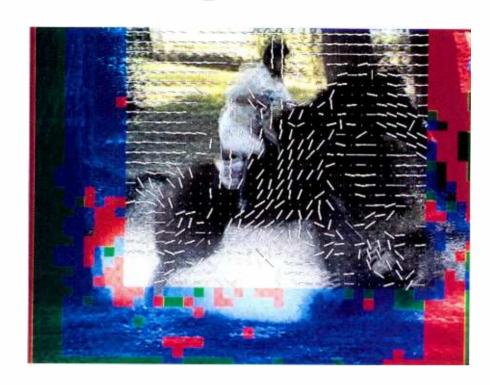

or broadcasters, a wide variety of processing is performed on conventional signals including real-time cuts, crossfades and wipes. Additionally, captions and logos must be inserted into full-frame signals as necessary. Video production requires all of the above and frame-accurate editing. As MPEG-2 becomes widespread, users will expect to perform these same functions on MPEG-2 signals. Unfortunately, these "simple" tasks are far more difficult on compressed signals than on baseband signals. One of the difficulties is the absence of a "standard" MPEG-2 bitstream. There are different bit rates, levels and profiles. There are also different types of bitstreams, including: elementary, program and transport streams. Properly handling these signals will require transcoding between different bit rates, levels and profiles, as well as creating new transport streams from elements of old ones.

The MPEG-2 standards focused on moving compressed signals from the studio to the viewer, with little consideration toward signal handling at the network level. Because of this, switching MPEG-2 streams in real-time is problematic. Current switching solutions can be classified into three categories: naive cascading, restricted MPEG-2 and bitstream splicing.

Naive cascading fully decodes the MPEG-2 signal prior to processing and fully re-encodes it afterward. Once decoded to baseband video, the signal could be switched or sent through a DVE. Under some circumstances no processing would be done, but the signal would be re-encoded at a different bit rate or with a different flavor of MPEG-2. In this case, the processing involved constitutes a transcoder. Fully decoding the picture is usually required for complex effects, because the effects require access to the pixels. However, in a situation such as master control, a switch of this type simply passes the input to the output the majority of the time.



BECAUSE LIVE RADIO IS A 24-HOUR GIG, BEST POWER NEVER STOPS.

In cities across America, the Susquehanna Radio Corp. keeps its stations on the air with Best Power uninterruptible power systems. Since electrical blackouts, brownouts, spikes, surges and line noise can potentially wreak havor with the airwaves, Susquehanna relies on Best Power to avoid power disturbances that cause "dead air" and lost listeners.

Susquehanna chose eighteen FERRUPS® units to safeguard their stations' sensitive broadcasting equipment. The FERRUPS' patented ferroresonant technology never stops, assuring that every Susquehanna station from San Francisco to Dallas to Atlanta has around-the-clock power protection every hour, every day.

For more information on Best Power uninterruptible power systems from 280VA to 220kVA, call 1-800-356-5794 operator 736, visit our website at http://www.bestpower.com, or access our fax-on-demand service at 1-800-487-6813.



Lossless editing with the "MOLE"

The result is an additional cascade (generation) of the MPEG-2 decoding/recoding process. Within a typical broadcast chain, several cascades are likely. The loss in picture quality caused by multiple cascades is typically about 5dB. This loss can be reduced by using a milder compression, but at the expense of an increased bit rate. Because of this, naive cascading is not considered a real solution to the concatenation problem.

The restricted MPEG-2 approach avoids the concatenation problem by compressing to a limited subset of MPEG-2. This allows something like frame-accurate editing to be performed on the bitstream. An example is the Sony SX system that uses an IBIBIB . . . GOP structure. Simple edits can be performed with minimal intermediate processing around the edit point. Unfortunately, the IBIBIB . . . structure requires a higher bit rate for a given level of quality than an IBBPBBP . . . structure. One benefit of the higher bit rates is that naive cascading can be performed with reduced loss. The main benefit of the restricted approach is that it offers a genuine solution to the concatenation problem. The downside is its incompatibility with mainstream MPEG-2 coding. In a closed environment, this may be acceptable. However, MPEG-2 Main Profile's success suggests it will increasingly be used as the medium for contribution (e.g., from SNG equipment), primary and secondary distribution (e.g., in digital terrestrial TV systems) and archive storage (e.g., in the ACTS AURORA project). Using a restricted version of MPEG-2 for editing, followed by a transcoding to Main Profile is less than attractive. And, the higher bit rates undermine the benefits of using compression in the first place.

The bitstream splicing approach attempts to do a "cuts-only" bitstream switch. It does not work for the more complex functions, such as crossfades or caption insertion and does not address transcoding. The SMPTE has carried out significant work in this area. Its Working Group PT20.02 (Switching and Synchronization) set up an ad hoc group that has proposed a stan-

dard for bitstream splicing. Two splice types are proposed: 'seamless' and 'non-seamless,' depending on how a decoder behaves when it receives the spliced bitstream. Seamless splicing is suitable for certain types of switching, but imposes restrictions, such as when the switch can be performed. Non-seamless splicing imposes requirements on downstream decoder behavior. The disadvantages of bitstream splicing in-

ferred to the re-encoder where it can be reused. This side information is given a formal data structure known as the *information bus*. (See Figure 1.)

The ATLANTIC decoder is a standard MPEG-2 decoder with an information bus output synchronized to the video output. Later, in the Dim coder (encoder), all the coding decisions are taken from the information bus. This ensures the re-encoding process is nearly



Work on the MOLE is under way at the Snell & Wilcox research laboratories in Hampshire, England.

clude a lack of flexibility and the required changes in encoder/decoder operations. Despite these disadvantages, bitstream splicing could be useful for a low-cost solution in some applications.

The ATLANTIC project

The ATLANTIC project was undertaken by several companies, including Snell & Wilcox and the BBC. Among the goals was the development of equipment and products that allow for the switching and editing of MPEG bitstreams without impairments.

The ATLANTIC approach recognizes that most processing operations require access to decoded pictures. Because of this, there is an inevitable cascade of decoding/recoding operations. In naive cascading, the side information including motion vectors and coding mode decisions that relate to the decoded picture are thrown away. This forces the decisions to be re-made when the signal is re-encoded. In ATLANTIC cascading, the side information is trans-

identical to the previous encoding. The only cascading impairments introduced are due to mismatches between the DCT and inverse DCT functions. These only amount to about 0.0002dB.

Decoding and re-encoding the bitstream as a permanent transparent process is useless. However, the benefits become apparent within the context of a larger process. The main processes that use the information bus are picture operations and transcoding. Picture operations process the picture and the information bus before re-encoding. In the transcoding process, no picture processing is required, but re-encoding is performed with some parameter changes, typically a change in bit rate.

Picture operations can be illustrated with the example of a bitstream switch. Using the information bus technique, an unrestricted switch can be performed and the technique can be extended to include crossfades and wipes. The block diagram of a bitstream switch using the information bus is shown in Figure 2.

If you haven't already taken these out for a test drive, here's your chance.

Short/cut[™] Editor

The perfect replacement for generations of reel-to-reel tape recorders. Short/cut delivers hard-disk storage, plus fast cut and paste waveform editing. Add an optional Zip™drive and get low-cost copies. This editor is fast enough for on-air use, and tough enough for the road. So take Short/cut out for a test drive and watch it perform.


Instant Replay. Instant sound effects. Instant music. Instant fun. Take it out for a joy ride.



DigiCart/II Plus

The new DigiCart/II Plus puts up to 50 hours of audio on hard disk, and now includes the popular Zip™drive for low-cost storage. As always, it's your choice of linear or Dolby®AC-2 recording, plus precise editing and powerful playlisting capabilities. The new "Plus" model delivers all the reliability that has made DigiCart a broadcast standard, and it's now available at a great new price. Ask for a test drive, and put it through the paces at your station.



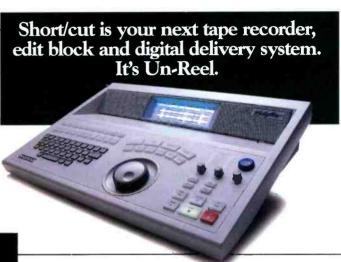

Instant Replay®

Instant Replay puts a thousand audio clips right at your fingertips. Sound effects, music, station ID's -up to 24 hours of your greatest material. And with 50 Hot-Keys, you can make your shows as spontaneous as you'd like. With everything titled, timed and ready to play, you'll find Instant Replay fast, fun and easy to use. So take us up on our offer to go for a test drive. It's on us.

Test drive theirs then test drive our DigiCart/II Plus. We've got more under the hood.



360 Systems

PROFESSIONAL DIGITAL AUDIO

For more information call (818) 991- 0360 / Fax (818) 991-1360 / e-mail: info@360systems.com / Website: www.360systems.com

Lossless editing with the "MOLE"

In it, synchronized decoded video signals are switched using existing technology. In the steady state, when bitstream A is selected, the information bus is passed unchanged from decoder

A to the Dim coder. The output bitstream is essentially identical to input bitstream A. The same thing occurs after the switching operation, when bitstream B is selected. Near the switch point, nei-

ther information bus is usable due to references made to picture information on the wrong side of the switching point. (See Figure 3.) During this switching period, the re-encoder is on its own and works as a full MPEG encoder. It is not possible to eliminate cascading impairments during this period by using the information bus. This is because, from an MPEG point of view, the majority of the pictures to be coded

consist of new information.

The re-encoder must lock to the new information bus quickly, thereby once again eliminating any cascading impairments. For most coding decisions, a lock can be obtained as soon as the switching period is over. However, an additional recovery period may be need-




Figure 1. Cascading using the ATLANTIC technology includes the use of the information bus.

ed to address buffer fullness issues. (For more information, see "Editing MPEG Bitstreams," October 1997.) During this recovery period, the reencoder is essentially operating as a transcoder. Once the buffer issues have been accommodated, the re-encoder can be fully locked to the new information bus and the steady-state cascade is re-attained. At this point, it would be possible (though unnecessary) to switch

the decoder-re-encoder unit out of the circuit and replace it with a compensating delay. In fact, the only calculations required to perform the switch take place near the switching period. This same switch could be implemented efficiently in an editing system using non-real-time software processing. There

are no restrictions in the relative or absolute GOP structures of the two bit-streams. In the example, bitstream A has a regular, common, IBBPBBP...structure, but bitstream B has an

almost random-looking, but perfectly legal structure.

The MOLE

In principle, the switch could be replaced by a production switcher or DVE, enabling a full range of functions to be performed on the decoded pictures. The only problem is in the handling of the information bus signals. They would need to be passed around



System Two

A New Standard For Audio Testing



Leading edge performance has been a defining feature of Audio Precision products since the inception of our company in 1984. Thousands of our System One audio analyzers are in use worldwide, selected by design engineers for high performance and by test engineers for our comprehensive programmable analog and digital audio measurement capabilities.

Now our System Two true Dual Domain and o analyzer joins the System One, setting a new standard for performance and flexibility in aud offrequency test & measurement.

System Two is a true Dual Domain analyzer. Other test instruments may have both analog and digital inputs and outputs ... but they're not true Dua Domain! They rely on performance-limiting converters to pass analog signals back and forth to a DSP core of digital-only hardware. Passing signals through a/d or d/a converters for every measurement robe the test instrument of performance. System Two includes

separate, independent hardware for direct audio measurements ir both domains, plus additional and extensive interface measurement capability including jitter measurements, eye patterns and all other parameters described in AES3, the serial audio interface standard.

The new standard of System Two is represented by performance specifications such as guaranteed analog generator and analyzer residual THD+N of -1C8 dB, guaranteed analog signal flatness of ±0.01 dB for the generator and analyzer; and 24 bit digital signal generation with 48 bit FFT dynamic range.

From aircraft to automobiles, satellites to cell phones headsets to hearing aids, System Two represents a new standard for audio frequency test & measurement applications. Compare for yourself our worldwide force of representatives will be pleased to provide comprehensive specifications and a true Dual Domain on-site demonstration.



Audio Precision PO Box 2209 Beaverton, Oregon 97075-3070 Tel: (503) 627-0832 FAX: (€03) 641-8906 US Toll Free: 1-800-231-7350

INTERNATIONAL DISTRIBUTORS: Australia: INTE Electrorics Py, Ed., 198 2 <38 3 **44, Austria: ELSINCO Gmbh, Tel: (1 8 **5 0.4 0.0 Belgium: Trans European Music NV, Tel: 2 466 5010 Brazil: INTERWAVE LTDA., Tel: (2) 325-5351; Bulgaria: ELSINCO Rep. Offices©plia, Tel: (2) 95+ 12 45; Canaca: GERNAUFIO Distribution, Tel: (416) 696-2779; Elna, Hong Kong: F C E (1n11) Co. Ltd., Tel: 2424 0387; Croatia: ELSINCO Rep. Offices Spite S

Lossless editing with the "MOLE"

the switcher and processed separately. However, some knowledge of the switcher's status would be needed. This requirement can be overcome by converting the information bus into a special format known as the "MOLE," which allows for the use of conventional digital studio equipment. Whenever the input signals are passed untouched, the MOLE associated with that signal is also passed automatically. In this manner, the MOLE "burrows through" the studio equipment and emerges at the other end, ready for use in re-encoding. Conversely, whenever the equipment affects the signal, such as during a crossfade, the MOLE is automatically destroyed and cannot be used for re-encoding.

The information bus is inserted into the video signal by the "MOLE composer" at the output of each ATLAN-TIC decoder and is decoded by the "MOLE interpreter" at the input to the ATLANTIC encoder. (See Figure 4.) For proper operation, the information bus must pass transparently through studio equipment. To do this, several conditions must be satisfied, including:

- the MOLE must be invisible on the video signal;
- the studio equipment must be capable of passing the MOLE signal without error; and
- the encoder must detect when the MOLE is no longer valid. When the MOLE is invalid, the encoder must make its own coding decisions.

The ATLANTIC technology imposes no special constraints either on upstream encoders or on downstream decoders. However, the quality of the first compression encoder in the chain needs to be as high as possible, because it defines the quality throughout the chain. Prototype ATLANTIC decoders and encoders, including MOLE processing, have been demonstrated.

Transcoding

In addition to picture operations, bitrate transcoding can be performed. In this scenario, the information bus is passed from the decoder to a Dim coder, but intermediate pixel-based processing is not used, eliminating the need for the MOLE. Two transcoder types are being investigated. The first is a 'drifty' transcoder.


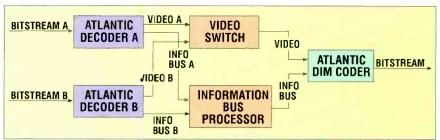


Figure 2. Bitstream switch using the information bus.

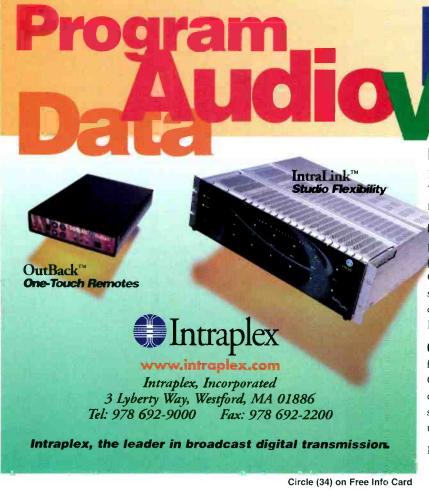

Intraplex ISDN.

Broadcasters rely on Intraplex for high-quality, flexible T1 transmission solutions. Now, Intraplex quality and flexibility are available over ISDN.

Intralink, the industy's first fully modular ISDN multiplexer, allows broadcasters to combine high-quality program audio, voice and data on a single ISDN circuit. Connect and configure up to six individual BRI's in a single rack unit shelf, and manage multiple channels and codecs from a single PC. Flexible and space-efficient, IntraLink, redefines ISDN for broadcast.

OutBack™ ISDN audio codec is the ideal companion for remote broadcasts. Compact and affordable, the OutBack™ provides "plug and play" ISDN connections, one-touch call set-up and auto-detection features that simplify use, with ISO/MPEG Audio Layer II coding up to 20 kHz.

Maximize your investment. Call us today.



For complex tasks like coordinating a TV news broadcast, a major event, or even a space launch, many people need to communicate with each other, quickly and easily. With Matrix Plus 3, you can configure a variety of multi-key intercom stations. assignment panels, and interfaces to meet your specific intercommunications need – linking your staff into a flexible team.

Advanced DDSP^{TM*} – distributed digital signal processing technology yields virtually instantaneous response times, control over all audio levels, full-bandwidth audio, multiple onboard configurations, and compact system size. Individually variable listen levels are controllable from all stations. Levels are also adjustable on each IFE interrupt.

Matrix Plus 3 integrates seamlessly with telephones, IFB's, camera and party-line intercoms, and two-way radios. And it's designed and built for failsafe operation. The system is backwards compatible with existing Matrix Plus II stations.

Matrix 2° Plus)

Matrix Plus 3 – the best and most reliable matrix intercom system available – meets the challenge of the most complex event coordination and production communications.

* Patent Pending

- Compact, modular, expandable
- Up to 200 full-duplex communications ports
- Variable listen levels from all stations
- Full-bandwidth audio
- Seamless interfacing with telephones,
 2-way radios, IFB's
- Link up to eight systems



Lossless editing with the "MOLE"

In the drifty transcoder, the decoding pipeline stops at the generation of inverse-quantized DCT coefficients. These coefficients are then requantized under the control of a bit-rate control algorithm set to the new bit rate. The information bus is passed from the variable-length decoder to the variablelength encoder for insertion into the new bitstream. The transcoder is drifty because the predictions generated in the downstream decoder will not match those generated in the upstream coder, causing accumulated errors in successive P pictures through the GOP. This architecture only provides limited opportunities for changing coding parameters, such as prediction modes. However, under some circumstances. such as when transcoding to a slightly lower bit rate, these restrictions may be acceptable.

The second type is a "full" transcoder, in which the decoder and encoder prediction loops are implemented. Even

here, some decoding and re-encoding steps can usually be left out, such as 4:2:0 to 4:2:2 conversion and picture re-ordering. With this architecture, no drift is introduced and it is possible to change some of the coding parameters. However, if prediction parameters are not changed, the architecture can be simplified, using only a single prediction generator.

decision level choices can be improved with knowledge of the previous quantization process. Requantizers such as these can provide significantly better picture quality at a given bit rate than the naive use of a commonly used quantizer.

Up to this point, the assumption has been a stand-alone transcoder. However, the full transcoder can be applied to any switching or processing equipment

SEQUENCE A: I B B P B P B

Figure 3. When a switch is done on two streams, the information bus can be used to reassemble the output stream. However, near the switch point, some frames must be reencoded because needed information does not exist.


For both transcoder types, requantization is important. In all MPEG encoding, including the re-encoding in a transcoder, the inverse quantizer *reconstruction* levels are specified in the standard. However, the quantizer *decision* levels are not. The decision levels can be chosen to optimize picture quality at a given bit rate. For transcoding,

using the MOLE. In fact, transcoding is necessary during the recovery period following a switch. The transcoder's architecture makes it possible to specify an arbitrary bit rate at the switch output or to deliver arbitrary bit rates at the inputs so that transcoding is automatic whenever necessary.

Continued on page 77

THE BIG PICTURE

ONLY THOMSON LETS YOU CONTROL THE COMPLETE TRANSMISSION...

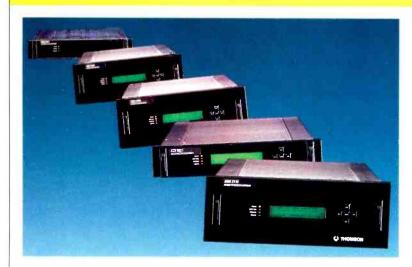

With Thomson Broadcast's MPEG2 Compression System, control is at your fingertips from start to finish...

The most powerful, high-performance transmission solutions...Thomson has the end-to-end systems expertise that brings them together seamlessly.

Spanning the breadth of the digital transmission chain, Thomson MPEG2/DVB equipment line includes:

- encoders
- multiplexers
- modulators
- •management system
- integrated receiver/decoders (IRDs)

Call us to find out how Thomson can keep you in control


THOMSON BROADCAST

49 Smith Street, Englewood, NJ 07631 - Tel: 1-800 882 1824 email: sales@thomsonbroad.com http://www.thomsonbroad.com

EASY PATCH

The Analog/Digital patch bays for today and tomorrow...from Neutrik®

Two choices to "wire up" Easy Patch for fast termination.

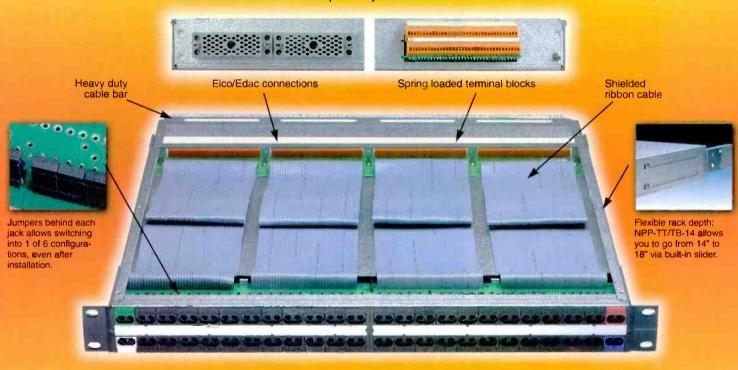

The Easy Patch series of easy to use patchbays eliminates signal degradation and offers excellent crosstalk performance required in today's broadcast facilities, mobile trucks, recording studios and audio installations.

Their analog/digital signal capability, reduced wiring time and quality workmanship are unmatched by competitors' patchbays.


The Easy Patch gives you features and options no other patchbay provides:

- Galvanized, heavy duty metal housing.
 Flexible depth from 14" to 18".
- Hard gold plated contacts designed specifically for A/D signals.
 Six jumper switching configurations.
- Ten color coded ID tabs optional.

You asked for innovation, productivity and value in a patch bay series and Neutrik listened.

Demo Easy Patch for yourself. Call 732-901-9488 and ask for our NEW product guide and the name of your nearest Neutrik representative.

Neutrik... your one stop source for all your audio connector needs...today and tomorrow.





TRIKUSA

CONNECTING THE WORLD

195 Lehigh Avenue, Lakewood, NJ 08701-4527 Phone: 732-901-9488 Fax: 732-901-9608 E-Mail:neutrikusa@aol.com

Circle (37) on Free Info Card

www.americanradiohistory.com

Understanding and testing the 8VSB signal

A basic understanding of the concepts used for 8VSB can be a powerful troubleshooting tool.

By Linc Reed-Nickerson



DTV brings with it many new challenges, among them, the transmission of information using symbols rather than analog waves. Although maintaining digital transmission facilities requires many of the same procedures used in analog facilities, a variety of new tools and techniques will be required to ensure noise- and error-free information transmission. Engineers charged with the maintenance of these new systems need to become familiar with these new tools and techniques as soon as possible. \$

Photo: A variety of equipment is required for 8VSB encoding and decoding. Pictured is the equipment used at the Model HDTV Station, WHD-TV, Washington, DC.



odern high-definition television was born in the mid-'80s. Since then, we have seen the formation of the Grand Alliance and the adoption of 8VSB as the U.S. DTV transmission standard. Most likely, 8VSB will be adopted by many countries using 6MHz channel bandwidths, while many countries with 8MHz channel bandwidth are adopting the DVB-T standard, which recommends coded orthogonal frequency division multiplex (COFDM). COFDM uses thousands of orthogonaly spaced carriers, each of which carries a portion of the data at a low symbol rate.

The Grand Alliance bitstream

The 19.39Mb/s digital signal fed to an 8VSB transmitter is referred to as the Grand Alliance (GA) bitstream. It contains MPEG-2 encoded video, Dolby AC3 audio and data, all packaged into 188-byte data packets. Packets consist of a sync byte, followed by a byte packet header (information about the packet), an adaptation packet of varying length and the data payload. Packet length was chosen for optimum coding performance in the transmitter's exciter.

In the exciter (see Figure 1.), the data is randomized as required by the FCC. The goal of randomization is to guarantee a flat, noise-like spectrum. For instance, if the GA input stream is lost, resulting in long streams of "1s" or "0s" or if a number of high-power symbols occur in a row, the randomizer assures that the output signal will not cause interference with existing NTSC channels. Randomizing also improves performance in the receiver recovery loops.

After randomizing, the data is sent to a Reed-Solomon coder. Reed-Solomon



FIELD PROVEN

TECHNOLOGY

EEV already offers the most comprehensive range of digital IOTs.

These have been developed as a result of work performed on experimental HDTV transmitter sites.

It's easy going with EEV. Whether your future transmitter is analog or digital, EEV has the right product for the job since the EEV IOT is already established as the most cost effective solution for analog UHF TV applications.

Talk to EEV now...the company with unrivalled experience and proven track record...and your digital dilemma will be resolved!



USA: EEV Inc., 4 Westchester Plaza, Elmsford NY 10523
Tel: (914) 592 6050 or 'Toll Free' 1-800-DIAL-EEV Fax: (914) 682 8922

CANADA: EEV Canada Ltd., 6305 Northam Drive, Unit 3, Mississauga, Ontario L4V 1H7

Tel: (905) 678 9811 Fax: (905) 678 7726

DI TREMINI AND

UK: EEV Ltd., Waterhouse Lane, Chelmsford, Essex CM1 2QU, England Tel: (01245) 493493 Fax: (01245) 492492

SUBSIDIARY OF THE GENERAL ELECTRIC COMPANY PLC OF ENGLAND SEC

Circle (22) on Free Info Card

At The Heart of Your Digital UHF TV Transmitter

Understanding and testing the 8VSB signal

coding is an error correction scheme operating as a byte-wise encoder. This type of encoding works well for short "bursty" errors. At the encoder, the sync byte is stripped from the GA packet and 20 parity bytes are added. This allows the decoder to identify and correct up to 10 byte errors per packet. In

sync signals are added in a data multiplexer to form the 8VSB baseband signal. Segment sync is sent after every 828 symbols. Segment sync is two-level binary data that is six data levels in amplitude and four symbols long, making each 8VSB data segment 832 symbols in length (See Figure 4.) Segment

After trellis encoding, supplementary

ed Modulation. (See Figure 3.)

bols in length. (See Figure 4.) Segment sync replaces the sync byte removed prior to encoding. Because it is easily located by the decoder, even in the

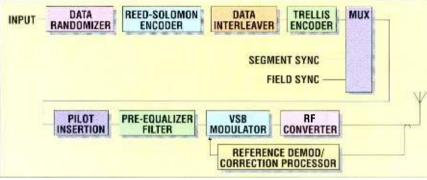


Figure 1. Block diagram of an 8VSB exciter.

terrestrial broadcasting, it is likely that noise burst durations will be longer than a Reed-Soloman error-correction scheme can handle. To protect the coding, the databytes are interleaved non-consecutively. (See Figure 2.) For 8VSB, the data is interleaved to a depth of 52, making it possible to correct for data lost due to noise bursts up to 193µs.

Next is convolution encoding, which uses a trellis coder. This complex coding scheme effectively handles white noise and results in signal gain (ex-




Figure 2. Simplified illustration of data interleaving. A noise burst that obliterates all three "B" bytes of a non-interleaved signal, covers only a single A, B and C byte of an interleaved signal. This leaves enough data for the Reed-Solomon decoder to determine the correct values of the missing bytes.

pressed in dB). Each bit at the coder's input produces two bits at the output. In 8VSB, there are eight possible states. However, in any one interval only four of the states are valid, depending on the previous interval. If the valid state changes are diagrammed, the results resemble a garden trellis, hence the name *Trellis Encoding* or *Trellis Cod-*

presence of noise, it adds to the signal's robustness.

A transmission data frame is 616 segments (48.4ms) in duration. (See Figure 5.) After every 312 segments, a frame synchronizing segment is sent. The frame sync segment carries the training reference signals for the receiver equalizer and consists of the four-byte segment sync, followed by 511 reference symbols. In the receiver, these are used

for adjusting long equalizer taps. After the 511 reference symbols for long equalizer taps are three sets of 63 reference symbols for adjusting the short taps. Next are 24 symbols for VSB level ID, 82 reserved symbols and 12 symbols that are repeated from the previous segment.

"raster-like" nature of Figure 5, you might be tempted to liken the segment sync to horizontal sync and the frame sync to vertical sync. However, this would be incorrect. The process of digital compression leaves out redundant parts of the picture and sometimes only transmits the parts of the picture that have changed. The position of digital bits in this apparent "raster" are

completely unrelated to their location on the screen. In fact, some of these bits are sound bits or databits. There may even be data packets from four completely separate standard-definition pictures mixed up, in no particular order, within the datastream. These packets are later sorted out in the receiver's MPEG decoder.)

Following the data mux, a constant value is added to the eight-level datastream. Much like adding a DC offset to a baseband signal, this constant offset generates the pilot signal. The 8VSB signal is transmitted as a single sideband suppressed signal and there is no carrier. The digital representation of the signal is split, passed through a root-raised cosine filter and converted to analog signals by high-speed D/A converters. The analog signals are input to two mixers, which are phase shifted by 90°. The output is a 44MHz IF signal, upper sideband only, with raised cosine response. At this point, the signal can be upconverted to the required channel frequency, sent to the power amplifier stages and broadcast.

Reception and decoding

Knowing how the 8VSB signal is generated, let's look at the receiver side. First, the receiver looks for the pilot to phase lock to the incoming signal. Once lock is achieved, the decoder locates segment sync to achieve an initial data lock. Even impaired signals can be phase

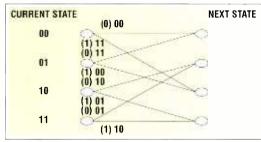


Figure 3. A simplified Trellis diagram showing the allowed state changes for a half-rate coder.

locked and the segment sync located. Next, the training sequence must be located because it provides the information needed to set the receiver's equalizer taps and correct unflatness in the incoming signal. At this point, the conditioned signal can be decoded into the 19.39MHz GA datastream. The pilot and sync signals not only help the receiver lock initially, but aid in maintaining

Artifact-free Compression Hours of Digital Storage 4-channel 24-bit Audio Real Time D-1 Recording Scalable Video Quality Single/Dual Serial Digital I/O **RS-422 Protocols** Built-in 20GB Tape Drive **Multi-format Support**

Total Connectivity

Introducing QuBit

The most phenomenal digital recorder-server on the planet.

And just maybe, the universe. This ultrahigh quality digital recorder-server combines powerful digital signal processing, artifact-free QuVIS compression and open networking standards in a single, scalable device. QuBit delivers the high-quality digital video you want and the versatility you need.

QuBit is networkable for instant access and expandable for virtually unlimited digital storage. With both disk and tape storage you can record and play back simultaneously – perfect for tape delay situations. QuBit is also a cost-effective replacement for any VTR you own. It can record better than D-1 quality in real time and features a dozen industry-standard connections.

QuBit – there's no digital recorder-server this advanced, this versatile and this affordable anywhere. Even if you're not from this planet.

To learn more about QuBit call 800-554-8116, 913-272-3656 or fax 913-272-3657. Circle (23) on Free Info Card QuVIS www.quvis.com

QuBit
Not Made by Aliens





Understanding and testing the 8VSB signal

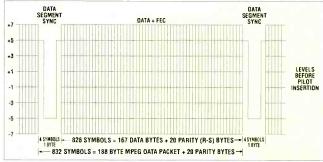


Figure 4. A single segment of the 8VSB digital baseband signal showing data levels and segment sync. Each segment is 77.3 μ s in duration and consists of 832 symbols.

lock should a disturbance occur. In many cases, the data lock may be lost, but pilot and sync lock are maintained, allowing for a quick signal recovery.

With digital reception, the picture and sound on a viewer's set are either nearly perfect or not there at all. Unlike analog signals that degrade gracefully, digital signals are subject to a cliff effect. Viewers who have been tolerating inadequate picture quality because of poor antennas, low signal level or noisy reception, may find they cannot receive a digital signal. Viewers living in the Grade B contour and fringe areas may find reception intermittent. Many of these viewers may require some education about steps they can take to ensure consistent, satisfactory reception. Work is currently under way to determine the benefits of circularly polarized antennas for DTV, which may significantly improve reception for those using indoor antennas, such as rabbit ears.

For analog signals, some picture impairments were tolerable, because the effect at the viewer's end was often negligible, even for some fairly severe faults. However, with digital, a transmitter with a linearity problem could mean the loss of viewers in the Grade B coverage area or worse. With digital, reception won't degrade gracefully, it will simply disappear.

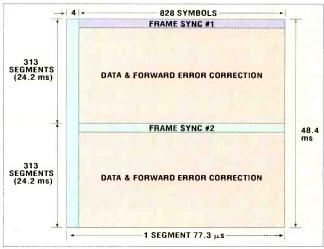


Figure 5. The transmission data frame showing the frame sync segment, which is repeated every 312 segments.

ANUNCIAMOS:

el Estreno del Evento Más Importante para la Industria de las Telecomunicaciones en Latinoamérica

ANNOUNCING:

The Premiere of the Most Important Event for the Latin American Telecommunications Industry

ANUNCIANDO:

o Mais Importante e Principal Evento do Mercado de Telecomunicacões Latino Americano.



TelecomLatina 98

Octubre 14-16, 1998 Miami Beach Convention Center Miami, Florida. USA

Elecomlatina promete ser la exhibición y conferenca más importante dentro de la industria de las te econumicaciones de América. Latina, presentando tanto tecnologías alámbricas como inalámbricas sajo un mismo tedro tales onos

Celular - Tecnologías de Acceso a las Redes-Telefónicas - Radio y T.V. Abierta Radiocomunicación de Dos Vias en Sist. Privacos y Sist. Trunking - Fibra Optica Microor das - Sist. de Comunicación Personal Plataformas OSS - Satélite - Servidores de Multimedia - Conmutación en Centrales Telefónicas - Radio Bocalización Nówil de Personas (Voceo) - SONET y VaD 4 Equipo de Prueba

Las confermicias serán concucidas en español y Dortucios y se presentarán temas, vitales acorde a las necesidades y características de la industria, latinoameticana.

! PERMÍTANCS SER SU ANFITRIÓN EN ESTE IMPORTANTE ESTRENO EN LA INCUSTR AT

Para mayor información:

Tel. +1-303-220-0600
Tel. 1-800-288-8606 são detrod EU)
Fax -1-808-770-0253

TelecomLatina '98 October 14-16, 1998 Miami Beach Convention Center Miami, Florida, USA

Telecomlatina promises to be the single most important trade show for the Latin American telecom industry including both wireless and wired technologies under one roof such as:

Cellular – Loop Access Technologies
Broadcast – Two-Way Radio & Trunking
Fiber Optics – Microwave
PCS – OSS Platforms
Satellite – Multimedia Servers
Paging – Switching
SONET & WDM – Test Equipment

Conference sessions will be held in Spanish and Portuguese and will present topics vital to the Latir. American industry's needs and characteristics.

For more information on exhibiting or attending, please call

Tel. +1-303-220-0600
Tel. 1-800-288-8606 (US oily)
Fax +1-303-770-0253

TelecomLatina'98

O primeiro nos E.U.A com conferências em Português 14 a 16 de Outubro, 1998. Miami Beach Convention Center Miami, Flórida- USA

A TelecomLatina promete ser a única e mais importante feira no mercado de telecomunicações Latino Americano, incluindo no mesmo local technologias "wireless e wired." tais como:

Celular - Wireless Local Loop - Rádio Difusao Rádio Comunicação e Trunking - Fibra Ótica Microondas - PCS - Plataformas OSS - Satélite Servidores Multimídia - Paging - Comutação Sonet e WDM - Equipamentos de Teste

As conferências serão realizadas em português e espanhol e serão apresentados tópicos vitais para as necessidades e características do mercado de telecomunicações Latino Americano.

PERMITA-NOS RECEPCIONÁ-LOS PARA ESTE SUPRA-EVEN-TO DAS TELECOMUNICAÇÕES!

Para informações sobre os expositores ou participantes, ligue:

Tel. +1-303-220-0600

Tel. 1-800-288-8606 (somente Estados Unidos)

Fax +1-303-770-0253

Browelt to you by Intertec Publishing, a E-III Media Company, publishers of these leading telecommunications and gelâted industry publications: Cellular & Mobile International, Global Telephony,
Willow of Broadcast News, Sacelize Communications, Mobile Radio Technology, RF Design, Broadcast Engineering, BE Radio, Transmission & Distribution World, Fleet Owner,

Sound & Video Contractor, Access Control & Security Systems Integration, Cellular Business, WhrelessWorld, Telephony

Produced and managed by the Intertec Trade Shows & Conferences division

www.americanradiohistory.com

Understanding and testing the 8VSB signal

Measuring transmitter performance

Several parameters are required for satisfactory operation. First, there is the basic FCC requirement against creating interference with other over-the-air services. To verify that there is no leakage into adjacent channels, out-of-band emission testing is required. Second, with analog, there was concern with signal-to-noise measurements. However, with digital, the desired-to-undesired signal ratio is measured. Desired is the intended output of your transmitter, undesired is any signal or noise component that does not belong.

Comparable to analog transmitters, flat frequency response across the channel passband is required. A properly aligned DTV transmitter exhibits many of the same characteristics as a properly aligned analog unit, flat frequency re-

sponse and group delay, with no leakage into adjacent channels. In the analog domain, the effects of group delay result in chroma/luma delay. Despite being degraded, pictures are still viewable. However, group delay problems in DTV transmitters result in intersymbol interfer-

ence (ISI) and a rise in the bit error rate (BER), causing viewers' sets to drop in and out of lock. Even low levels of ISI may cause receivers operating near the edge of the cliff to lose the picture completely. Amplitude and phase errors may cause the same problem, again, resulting in reduced viewer coverage.

Eye patterns and BER have become buzz phrases with digital signals, but they may not be the best parameters to monitor. The constellation diagram and modulation error ratio measurement provide insight into over-

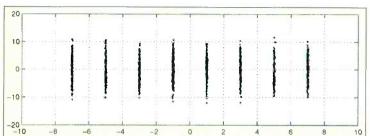


Figure 6. A near-perfect constellation diagram of an 8VSB signal.

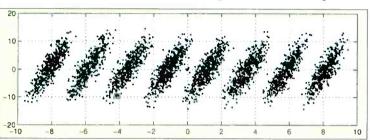


Figure 7. Constellation diagram of an 8VSB signal with noise and phase shift. Spreading of the dot pattern is caused by noise, while the slant is caused by phase shift.



Circle (38) on Free Info Card

all system health and allow you to identify problems before they affect viewers. RF constellations are displayed on the I (in-phase) and Q (quadrature) axes. Constellations of tight vertical dot patterns with no slanting or bending indicate proper operation. Figure 6 shows a near perfect constellation diagram. 8VSB levels are the in-phase signal so they are displayed left to right. An 8VSB signal is a single sideband signal with pilot carrier added. In a single sideband signal, phase does not remain constant. Therefore, the constellation points (dots) occur in a vertical pattern. As long as the dot pattern is vertical, and the points form narrow lines of equal height, the signal is considered good and can be decoded. Figure 7 shows an 8VSB signal that has noise and phase shift. Noise is indicated by the spreading of the dot pattern. Phase problems are indicated by the slant along the Q-axis.

BER is a good and valid measurement for 8VSB. Unfortunately, you are losing viewers by the time the degradation is apparent. Monitoring the modulation error ratio (MER) allows you to see an indication of degraded performance before BER is effected. In many cases, MER provides enough warning time to correct problems and prevent lost viewers. MER provides an indication of how far the points in the constellation have migrated from the ideal. There can be considerable migration before boundary limits are exceeded. Degradation in the BER is only apparent when those limits have been exceeded. Good 8VSB measurement sets allow MER and other transmitter parameters to be continually monitored and will alert operators when signal parameters are outside cautionary limits.

DTV brings opportunities and a new set of problems. Opportunities lie in the ability to transmit HDTV pictures or multiple standard-definition images. Additionally, picture and sound quality will be better than currently available signals. The problems come in helping your viewers get the most from their investment in DTV. Part of that job will be ensuring that your transmitter is providing the optimum


Linc Reed-Nickerson is a product development manager for Tektronix Inc., Beaverton, OR.



GMS Introduces the

FIRST AND ONLY, TRULY PORTABLE, MULTIBAND MICROWAVE SYSTEM

At a fraction of the cost of the 3 radios it replaces



HAVE THE RIGHT LINK... NO MATTER THE FREQUENCY ASSIGNED

-The standard model STM has the 2, 7 & 13 GHz bands in NTSC or PAL. The transmitter is frequency agile with power output levels of 3 W @ 2.0 GHz, 1.5 W @ 7 GHz and 200 mW at 13 GHz. Different bands and higher power available by special order!



-The unit is controlled by an integrated membrane switch with an LCD display or remotely through a standard RS-232 interface.

-The STM series' compact size, lightweight and very rugged construction allows maximum flexibility in applications from ENG to POV and hidden camera.

Global Microwave Systems manufactures a complete line of high quality, ruggedized and competitively priced microwave communications equipment.

Subminiature Transmitters - Miniature and Compact Receivers - RF Power and Low Noise Amplifiers – Antennas – Helicopter Antenna Actuators - GPS Controlled Directional Antenna Systems.

Contact GMS for solutions to your microwave link applications.

TEL- 760.631.8021 www.gmsinc.com skoch@gmsinc.com

FAX- 760.631.8031

4141 Avenida de la Plata – Oceanside, CA 92056 USA

Budgeting for DTV

One way or the other, it all comes down to numbers. The technology is secondary.

By Jerry Whitaker



THE BOTTOM LINE:

There's no doubt about it, DTV is coming and is already here at some stations around the country. While stations are dealing with the changes in technology, the question still comes down to "how much is it going to cost?" Here are some "take it to the bank" answers to these tough questions.\$

ake no mistake about it, high-definition television via the Grand Alliance DTV system is coming to a station (or two) near you. Industry critics notwithstanding, HDTV will be to NTSC what FM was to AM. In both cases, there is a fundamental change in the competitive landscape. That's the good news.

The bad news is that there is no such thing as a free lunch, especially where the government is concerned. What is this "new viewing experience" going to cost broadcasters? Plenty. Some issues include:

- Reduced coverage, relative to the existing NTSC signal, in many cases. Replicating NTSC service with DTV is a laudable goal, but for most VHF NTSC stations that are assigned UHF DTV channels, the jury is still out.
- Fast-track implementation scenarios for major market stations that will strain the ability of equipment vendors to design, build and install the necessary systems.
- A licensing nightmare for stations in the unfortunate position of having to erect a new transmission tower. The problem is not so much from the FAA or the other federal agencies, but from local governments, some of which have built reputations on being difficult to deal with.
- A steep learning curve for everybody involved in the process. From the director of engineering to the news department set designer, widescreen operation in general, and DTV in particular, will require more than just a little reschooling.

It will also cost a boatload of cash. To summarize the overall implementation plan blessed by the FCC, "Please pay now. We'll let you know later if you're going to make any money at this."

I mentioned the FM radio experience. Many industry observers have characterized the move to DTV as something akin to the move from black-and-white to color, only raised to the second or third power. Perhaps.

Consider another familiar industry paradigm shift: the move from a dominant AM radio industry to the powerhouse that FM is today. Those of you who were around in the early days of FM will recall that it was decades before FM began to look like a profit center. It was, of course, the classic chicken-and-the-egg situation: expensive transmission systems broadcasting to non-existent receivers. And the few receivers that were in the field were temperamental in the extreme. It took a unique feature set — stereo, in this case — and affordable, stable receivers for FM broadcasting to blossom.

If we accept that DTV is coming and the TV industry will be participating in it sooner rather than later, the challenge becomes how do we get from here to there. The place to start is, of course, at the bank. The transition to DTV must

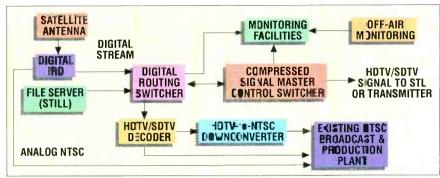


Figure 1. Block diagram of a minimal ATV implementation that provides for limited local insertion.

fit into some type of business model (even if the model has more than a few uncertainties in it).

HDTV model vs. reality

As with many things technical, the plans of the designers and those of the end users do not always coincide. It was assumed from the beginning of the standardization process for HDTV that the end result would be a system specifically for the delivery of pictures and sound of superb quality. The reality today, however, is shaping up to be a bit different. TV stations and networks

are asking themselves at this juncture in the HDTV roadway, do I really want to transmit HDTV or would I rather transmit more of the same stuff that I send out now?

The flexible nature of the Grand Alliance system permits broadcasters to decide whether they would like to send to viewers one superquality HDTV program or several "NTSC-equivalent" SDTV programs. A significant component of the FCC decision on DTV was the timetable for implementation. Few industry observers believe that the timetable can be met. Fewer believe that the




The Great Am



erican Classic.

Now with more editorial beef.

Remember the days when the burger was bigger than the bun - when patties were carefully handcrafted - and when the meat was actually meat? We do! At Broadcast Engineering we understand what it takes to be a Great American Classic, carefully handcrafting each issue to bring you the true meat of the industry. And in 1998 Broadcast Engineering reinvents the classic with an editorial package that you can really sink your teeth into. We'll bring you even more of the "how to, what to, why to, where to and when to" technical analysis that helps you do your job better. Just the thing you need to take a big bite out of digital television. So don't get caught playing "ketchup" in the transition to digital, take a leading role with the magazine leading the way - Broadcast Engineering - The Journal of Digital Television. Look for the new Broadcast Engineering in January 1998,

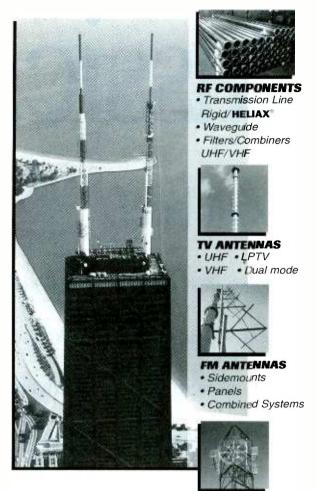

PANEL ANTENNAS · FM · UHF · VHF

hen You Want More Than <u>Just</u> An Antenna



USA

JAMPRO ANTENNAS/RF SYSTEMS, INC.

P.O. Box 292880 Sacramento, CA 95829 USA Phone (916) 383-1177 • Fax (916) 383-1182

www.jampro.com . E-Mail: jampro@ns.net

HELIAX® is a registered trademark of Andrew Corporation

Budgeting for DTV

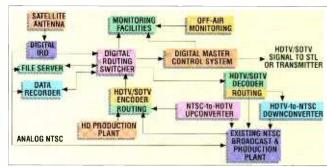


Figure 2. Block diagram of a transitional ATV model, which provides some local origination capabilities.

deadline will really stick. Be that as it may, the most basic question for TV stations is what to do with the informationcarrying capacity of the DTV system. The choice of HDTV programming or multiple-stream programming has an immense impact on facility design and budget requirements. Once that decision has been made, the implementation problems must be dealt with, including:

- weighing signal coverage requirements against facility costs;
- tower space availability for a DTV antenna:
- transmitter trade-offs and choices;
- STL, IRD and satellite links:
- master control switching and routing;
- production equipment (cameras, switchers, special effects systems, recorders and related hardware); and
- studios and sets for widescreen presentations.

Many possible implementation scenarios have been proposed. The plans quickly divide into two basic camps:

- 1. Minimal DTV. Under this plan, as illustrated in Figure 1,1 local stations simply pass-through DTV signals and provide limited local insertion. Local insertion is one of the unresolved issues for DTV implementation. Considerable discussion has taken place over how the MPEG-2 signal can be made to support the logo supers and other effects that have become commonplace in television. Under the minimal DTV scenario, no local production of widescreen HDTV would be attempted.
- 2. Transitional DTV. This plan takes the minimal DTV scenario and adds some local origination capabilities. As illustrated in Figure 2,1 this plan establishes a foundation

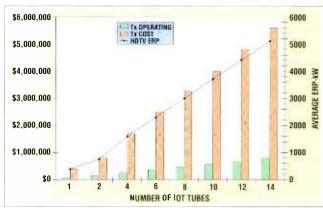


Figure 3. Cost of ownership and DTV system power vs. number of IOT tubes.

upon which additional local capabilities could be based.

Regardless of the route taken to DTV, every scenario will involve a transmission system upgrade. Depending upon the existing facilities, principally the tower, this element of the conversion to DTV will likely be the most costly.

Implementation issues

The purchase of a new transmitter for DTV operation, or for NTSC use for that matter, is a complicated process that must take into consideration a number of variables:

- The actual cost of the transmitter, both the initial purchase price and the ongoing maintenance expenses for tubes and other supplies.
- The actual AC-to-RF efficiency, which relates directly to the operating costs. Efficiency numbers for transmitters can be rather confusing. The only number you really care about, however, is how much AC is required to achieve your licensed power output.
- Maintenance issues, the most important of which is the mean time between failure (MTBF). Also important is the mean time to repair (MTTR), which relates directly to the accessibility of transmitter components and the type of amplifying devices used in the unit.
- Environmental issues, not the least of which is the space needed for the transmitter. The cooling requirements are

	MINIMA	L MODEL	TRANSITIONAL MODEL		
CATEGORY	LOW VHF	HIGH VHF	LOW VHF	HIGH VHF	
TRANSMISSION EQUIPMENT	\$183k	\$260k	\$183k	\$260k	
BROADCÁST EQUIPMENT	\$265k	\$265k	\$759k	\$759k	
DIGITAL STL SYSTEM	\$173k (119k)	\$173k (119k)	\$173k (119k)	\$173k (119k)	
MONITORING/TESTING	\$60k	\$60k	\$60k	\$60k	
TOTAL	\$681k (627k)	\$758k (704k)	\$1.175m (1.121m)	\$1.252m (1.198m)	

Table 1. Cost of a VHF transmission facility with STL multiplexing. The numbers in parenthesis equal a site without STL multiplexing.

also important and may, for example, affect the ongoing maintenance costs.

• The availability of sufficient AC power and power of acceptable reliability and regulation at the site.

Each of these issues must be given careful consideration before any buying decision is made. It is possible, for example, that upon further examination, the transmitter costing the least to purchase winds up being more expensive than others in the long run because of higher annual operating expenses.

RF power requirements

Two parameters determine the basic design of any transmitter: the operating frequency and the power level. For DTV, the frequency has been clearly spelled out; the power parameter, however, deserves and indeed requires additional consideration.

The FCC allocation table for DTV lists ERP values that are



Budgeting for DTV

given in watts rms. Although sometimes referred to as average power, this is not always technically correct. The intent was to specify the true heating power or rms watts of the total DTV

signal averaged over a long period of time.² The specification of transmitter power is further complicated by the DTV system characteristic peak-to-average ratio, which has an impact on the required power output rating of the transmitter. For example, as-

sume a given FCC UHF DTV ERP allocation of 405kW rms, an antenna power gain of 24 and a transmission line efficiency of 70%. The required DTV transmitter power Tx will equal:

$$Tx = \frac{405}{24} \times 0.7 = 24.1 \text{kW}$$

Because the DTV peak-to-average ratio is four (6dB), the actual DTV transmitter power rating must be

96.4kW (peak). This 4x factor is required to allow sufficient headroom for signal peaks.

The tower: the big question

The station's transmitting tower — long ignored and possibly forgotten — by most station managers, has taken center stage as one of the more important elements that must be addressed in any move to DTV operation. Adding a new antenna and transmission line to an existing tower first requires a structural analysis to determine if the existing tower can support the additional equipment loads.³ Armed with the results of this analysis, a decision can then be made on the next course of action, generally by choosing from one of the following options:

- Use what you have. The tower's structural capacity will support the DTV transmission line(s) and antenna(s), allowing installation to proceed. In this situation, little or no alteration will be required to the existing tower.
- *Improve what you have*. One or more of the tower components will be overstressed by the transmission hardware,

so the tower must be reinforced to accept the additional equipment loads. In this situation, structural modifications are necessary, requiring additional time and expense before installation of the additional DTV transmission

CATEGORY	LOW-POWER	MEDIUM-POWER	HIGH-POWER
TRANSMISSION EQUIPMENT	\$390k	\$1.005m	\$1.49m
BROADCAST EQUIPMENT	\$265k	\$265k	\$265k
DIGITAL STL SYSTEM	\$173k (119k)	\$173k (119k)	\$173k (119k)
MONITORING/TESTING	\$60k	\$60k	\$60k
TOTAL	\$888k (834k)	\$1.503m (1.449m)	\$1.988m (1.934m)

Table 2. Cost of a UHF transmission facility. The numbers in parenthesis equal sites without STL multiplexing.

line(s) and antenna(s) can proceed.

• Lose what you have. Addition of DTV transmission line(s) and antenna(s) will compromise the structural integrity of the tower to a point that reinforcement would be cost-prohibitive or beyond good engineering judgment. In this situation, the only alternative is to construct or lease a new transmitter site.

Regardless of which option you will be faced with, the costs associated with these changes will force all broadcast-

CATEGORY	LOW-POWER	MEDIUM-POWER	HIGH-POWER
TRANSMISSION EQUIPMENT	\$390k	\$1.005m	\$1.49m
BROADCAST EQUIPMENT	\$759k	\$759k	\$759k
DIGITAL STL SYSTEM	\$173k (119k)	\$173k (119k)	\$173k (119k)
MONITORING/TESTING	\$60k	S60k	\$60k
TOTAL	\$1.382m (1.328m)	\$1.997m (1.943m)	\$2.482m (2.428m)

Table 3. Cost of UHF transmission facility. The numbers in parenthesis equal sites without STL multiplexing.

ers to look toward maximizing their vertical real estate assets. The advent of cellular telephony and personal communication systems (PCS) has caused many municipalities nationwide to tighten their zoning restrictions, and in some cases, to deny the construction of new towers, regardless of the purpose.

The cost of coverage

A fundamental question in the DTV planning process is, "What is 'full coverage' of the DTV signal really worth?" The first step in finding the answer to this question is to develop a "cost of ownership" table for varying transmitter sizes and the corresponding ERP produced. Engineering issues aside, it is possible to build a facility with equivalent DTV-NTSC coverage; whether it is *practical* to build one is quite another matter. The results of one case study⁴

are summarized in Figure 3. The values given are only estimates and may vary depending on the specifics of the installation. The cost of electricity, a major element in the cost of ownership, is a parameter subject to local variations.

The bottom line is that achieving equivalent coverage in many instances is not worth the cost. A point of diminishing returns is reached where twice the money does not buy you twice the viewers.

The issue in perspective

Several organizations have made concerted efforts to attach specific numbers to the various conversion scenarios. One of the better known efforts was conducted by the Public Broadcasting Service. Its basic conclusions are given in Tables 1-3.5 The costs change greatly depending upon the DTV model that is embraced by the station.

One of the major problems facing stations that are planning for the conver-

sion to DTV is that, for many issues, the answers are not yet known. Hardware vendors and consultants are scrambling to meet the demand for answers and equipment. Eventually, the issues will sort themselves out. Until then, uncertainty is the name

of the game. If it's any consolation, you're not alone.

Jerry Whitaker is a contributing editor to Broadcast Engineering magazine.

References

- 1. Zou, William Y., "Calculating the Cost of ATV, Part 1," Broadcast Engineering, Intertec Publishing, Overland Park, KS, pp. 14-16, October 1996.
- 2. Plonka, Robert J., "Planning Your Digital Television Transmission System," Proceedings of the 1997 NAB Broadcast Engineering Conference, National Association of Broadcasters, Washington, DC, p. 89, 1997.
- 3. Crowder, Thomas G., "Maximizing Vertical Real Estate," Broadcast Engineering, Intertec Publishing, Overland Park, KS, pp. 44-50, July 1996.
- 4. Bendov, O., "Planning Your HDTV Coverage Area," Broadcast Engineering DTV Conference, Intertec Publishing, Overland Park, KS, November 1996.
- 5. Zou, William Y., "Calculating the Cost of ATV, Part 2," Broadcast Engineering, Intertec Publishing, Overland Park, KS, pp 16-18, November 1996.

Lossless editing with the "MOLE"

Continued from page 60

Although it has been stated that this approach will handle any MPEG-2 signals without restriction, bad coding decisions and motion vectors cannot be made better by ATLANTIC technology alone. If a relatively high bit-rate bitstream does not make proper use of the MPEG-2 specification (e.g., has a small motion vector range) and is received for transcoding to a low bit rate, the re-encoder will essentially have to work as if it were encoding for the first time. It is possible that a range of transcoders with varying degrees of capability for remaking coding decisions could be developed, but the best approach is to generate good quality bitstreams the first time they are encoded. A prototype transcoder implementing the approaches outlined above is under construction.

Additional applications

The MPEG switching technology previously described makes it possible to develop a frame-accurate, non-linear editor in which the input and output interfaces, as well as the information stored on the server, are all in MPEG-2 form. Such an editor has two major advantages over other technologies:

- 1. Editing can be performed in the MPEG domain without fear of introducing cascading artifacts.
- 2. MPEG-2 is more efficient in bit-rate terms than other formats currently used in editors. This could lead to greatly reduced costs for servers and network connections.

Figure 5 shows a block diagram of a post-production editing system suitable for small studio applications. This system is being built in the ATLANTIC project. In it, control, video and audio sequences are transferred via an ATM network using standard TCP/IP file transfer protocols. The following is a brief description of the main elements of the editor:

• Format converter: Converts incoming MPEG-2 transport streams into separate video, audio and data PES streams for storage on the main server and generates an index file.

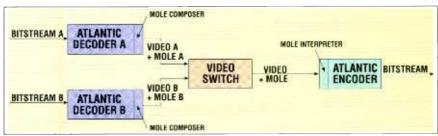


Figure 4. ATLANTIC switch using the MOLE.

- Browse track generator: Generates an MPEGI-frame-only reduced-resolution browse track corresponding to the video stored on the server, and possibly an audio browse track, and stores these on the browse server.
- Journalist workstation: Operates as a conventional edit workstation on the I-

processing and reducing the cascading impairments;

- designing a low-cost journalist workstation using off-the-shelf MPEG decoders; and
- system-wide control.

Although the challenges are significant, the potential advantages of an

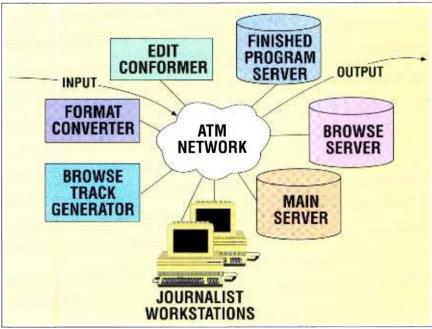


Figure 5. The ATLANTIC post-production system.

frame browse track and provides a graphical user interface to allow journalists to create an edit decision list.

• Edit conformer: This is the real-time ATLANTIC switch, controlled by the edit decision list. Bitstreams are pulled from the main server, edits are conformed and the results are placed onto the finished program server.

Developing a true MPEG-based editor poses several design challenges including:

- audio/video synchronization;
- handling program-related data;
- audio editing; initially, a simple bitstream switch operating on audio frame boundaries will be used. For more refined operation, an audio MOLE has been developed enabling sophisticated

efficient MPEG-based editor and switcher are enormous. Seamless, unrestricted switching and mixing, together with high-quality transcoding on any MPEG-2 bitstreams, will make it easier to integrate these new signals into existing facilities. Components based on this technology will make possible a full range of processes on MPEG bitstreams while preserving quality throughout the complex broadcast chain. The cost benefits of compression need not be given up to buy flexibility in bitstream processing.


Mike Knee is a principal research engineer at Snell & Wilcox (UK), and Nick Wells is a project manager at the BBC R&D (UK).

transmission technology

By Don Markley

Tower lighting and you

The lights on your tower(s) are somewhat akin to the spare tire in your car. You know it's back there somewhere, but you really don't pay it much attention. You look at it now and then, but you really don't do anything with it. When the car is serviced, someone else checks it and you generally leave it alone.



In the opinion of the FAA

The regulations on tower lighting are well-known although most broadcasters don't really understand how their specific requirements are determined. The FAA doesn't assign the tower lighting requirements for broadcast facilities — the FCC does. The whole process for a new tower starts when a notification of proposed construction is filed with the FAA. The

FAA assigns the notification a study number and starts the review process. After studying the impact on the airspace, the FAA determines whether the proposed construction is a hazard to air navigation.

This determination is handled as an opinion and forwarded to the FCC. Remember, this is not a definite ruling, but an opinion. One important distinction is that you can't fight an opinion in court. The FAA's position acts as a recommendation to the FCC, and is almost always accepted as the final word on the subject. If the FAA doesn't feel that a proposed structure would be a hazard, it suggests a lighting and marking scheme, adding the necessary enhancement to the tower to deter pilots from hitting it.

Usually, the FAA recommends an alternative; either painting and red lights or some type of strobe lighting. For shorter towers, medium-intensity strobes may be acceptable to the FAA. For the tallest structures, high-intensity strobe lighting may be the only acceptable system for daytime use. An alternative almost always acceptable to the FAA is a dual system in which the tower is marked with high- or medium-intensity lights during daytime hours and red lights at night. This is not accompanied by a painting requirement.

When either red lights and paint or strobes are suggested by the FAA, the commission usually requires the conventional lights and paint. Conventional lights and paint are considered to be more environmentally friendly, translating into fewer complaints

received by either the commission or the congressmen from the affected area. Some zoning boards are now urging the use of either conventional lighting and marking or dual systems to reduce the visual impact of towers. If a strobe lighting system is preferred by the station, a request can be made to the FCC accompanied by a description of the area and an explanation of why such a system would not have an adverse environmental impact. Upon a satisfactory showing, the FCC may change the construction permit to allow the strobes.

The fact of the matter is that dual lighting or the conventional paint and red lights do result in fewer complaints. Many people find the flashing strobes bothersome at night. They certainly don't add beauty to a hilltop or to a residential area. Apparently, the cellular/PC industry has decided that strobes are the way to go. It is assumed that this is based strictly on cost, because strobes do eliminate the need for repainting the towers. Still, it isn't really being friendly to the neighbors. Perhaps there is a lesser need for good neighbors for giant cellular companies than for a broadcast station.

Observing the rules

Now for the spare tire part. The rules for tower light observation are clear and well-known to all broadcasters. Basically, the lights need to be checked daily to ensure that they are on. Fortunately, the current crop of remote-control and monitoring systems can handle that function and even make the required notifications if a problem exists. Still, it is highly recommended that someone — yes, a real person — keeps an eye on the lights. Contact a neighbor of the tower or a nearby authority with your request that they simply keep an eye on the tower and let you know if they notice a problem. Together with the automatic system, this should give you adequate notice of light failure.

When any portion of the lighting system fails, and this is important, you *must* promptly notify the FAA and make provisions to have the system repaired. If you don't know who to call at the FAA, try the nearest airport control tower. It will usually be listed in the phone book along with numbers for the nearest flight service station. Find this number and post it where it is easily found. Immediately upon finding part of the

system has failed, notify the FAA. When you do this, get the name of the person you talk to and record it, along with the time of the notification, on your maintenance log.

This whole notification thing is hugely important. First, if you do not notify the FAA of the problem and an aircraft hits your tower, you may be liable for damages. When the lights are not functioning properly, the tower immediately becomes a hazard to air navigation. When you notify the FAA, it issues a

Notice to Airmen of the unlit or improperly lighted structure. All pilots are required to check these notices (NOTAMs) before a flight for proper flight planning. If your tower is so listed and someone hits it anyway, you have a good chance of being in the clear on the liability issue.


Second, if you don't promptly notify the FAA and the FCC catches you, the fine may be eye watering. The base amount for "violation of tower obstruction marking and lighting requirements" is now \$10,000. This is for a single violation or a single day of a continuing violation. The commission has the discretion to assess such an amount for each day of a continuing violation. By the

way, don't try to lie your way out of such a mess. The base amount for "misrepresentation/lack of candor" is \$27,000. Fess up and take your lumps with the assurance that the lumps would be bigger if you lied.

Take note, the violation is for marking and lighting. The marking bit is normally the condition of the tower's paint. The FCC inspectors have a card with paint chips to identify when the tower paint is faded to the point that repainting is necessary. Because you don't have such a card, paint when in doubt. Usually, the condition of the paint regarding peeling and flaking will alert you of the need to repaint before the fading is too severe. Your rigger will also advise you of the need for painting as part of routine inspections.

Finally, we come to the maintenance of the lighting system itself. This brings us back to the spare

tire comparison. With the exception of the photocell and flasher, there isn't too much that the station engineer can do to the system. You really are at the mercy of your riggers or contractor. For strobe systems, there are several good companies who will maintain the strobes on a contract basis. For red lights, most stations simply rely on a good rigger to change the bulbs, either regularly or upon failure. Stations should have a contract with a reliable rigger to change the bulbs on a scheduled basis. This eliminates most of the burnout problems. When you do lose a bulb unexpectedly, try to get it replaced within a couple of weeks. Then, notify the FAA that your operation

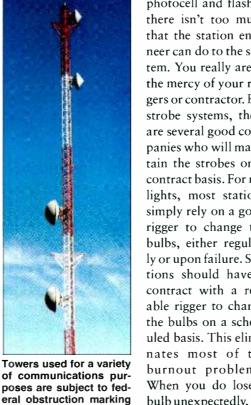

has returned to normal.

regulations, which in-

clude rules for paint and

lighting. (Photo courtesy

of Bob Mosher, CEE, con-

sulting engineer.)

The secret to keeping your towerlighting system legal is a reliable rigger or lighting service contractor. The secret to keeping your job is notifying the FAA immediately upon learning that the system is not functioning fully within the regulations.


Don Markley is president of D. L. Markley and Associates, Peoria, IL.



By Deanna Rood

Lenses Canon

• IFpro 18X lenses: these lenses incorporate internal focus (IF) technology that allows you to get closer to the image while capturing an even



Canon, One Canon Plaza, Lake Success, NY 11042; 800-321-4388; bctv@cusa.canon.com Circle (255) on Free Info Card

Digital console Solid State Logic

not rotate.

• Aysis Air: a 48-channel digital console designed for live broadcasters; it incorporates its own router for stand-alone operations, but can be extended to use SSL's Hub Router, providing control of more than 2,000



sources and destinations; complex wiring is reduced by the 95 channels of digital audio on a single coaxial cable; the dedicated control surface is optimized for real-time mixing operations and all console controls are fully automated dynamically or via snapshots; settings can be stored and instantly recalled, selectively and globally; superior sonic performance is provided by the SSL's advanced proprietary digital processing.

Solid State Logic, Begbroke, Oxford OX5 1RU England; +44(0) 1865 842300; fax +44 (0) 1865 842118 Circle (254) on Free Info Card

Video server

ASC Audio Video Corporation

• VR300: driven by a Pentium Pro processor, this disk-based on-air solution features Fibre Channel RAID storage and ASC's FibreDrive architecture; FibreDrive allows multiple servers to have instant, simultaneous random access to shared Fibre Channel RAID storage; the



VR300 video server takes advantage of on-line Fibre Channel RAID digital storage, and ASC's RAIDsoft technology eliminates the need for a hardware RAID controller; RAIDsoft protects systems against double data drive errors and single, unknown location data driver errors; in addition, hot standby disk drives can be added to the array for an extra level of redundancy so that if a disk drive failure occurs, the lost information is rebuilt automatically in the background to a hot spare, and the failed drive can be removed at the next scheduled maintenance interval.

ASC, 4400 Vanowen St., Burbank, CA 91505; 818-843-7004; fax 818-842-8945 Circle (263) on Free Info Card

HDTV upconverters

Tekniche

• JUNO: a range of high-quality HDTV upconverters that offers features such as aspect ratio conversion and comprehensive noise reduction in a 2RU frame at a cost-effective price; other standard features include advanced conversion of SDTV to HDTV, analog and digital outputs, full 10-bit resolution with 16-bit internal processing and multilevel noise reduction; a flexible architecture allows a wide range of input and output standards: options include a high-quality digital combfilter decoder, audio delay/resynchronization and advanced noise reduction.

Tekniche, 100 Stonehurst Court, Northvale, NJ 07647; 201-784-2288; fax 201-784-3860 Circle (256) on Free Info Card



Improve spot management Columbine JDS




• Clip Vault: a software and hardware package designed to manage video servers and digital tape archives; as an addon to CIDS's MCAS-III total master control automation package, Clip Vault improves spot management, while bringing total integration to the management of video material in a station; by streamlining station workflow, it can reduce your operation costs, while improving efficiency; new spots or promos are copied to the video server using MCAS-III software eliminating the need for dubs and bar coding — then Clip Vault moves a copy of the material from the video server to a robotic digital archive; there is no loss of quality even after repeated playing because the spots are stored as digital files; the digital tape archives store 100+ hours of video material.

Columbine JDS, 1707 Cole Blvd., Golden, CO 80401; 303-237-4000; fax 303-237-0085; www.cids.com Circle (257) on Free Info Card

Picture-quality measurement system Tektronix

• PQA200: a picturequality analysis system that can measure video image quality quickly, automatically and objectively; you can use the PQA200 for managing picture quality to meet the requirements of con-



tent providers and viewers, while using available bandwidth as effectively as possible; it can deliver practical, repeatable results in less than a minute independent of the types of impairment present, the compression system used or the video material itself; measurements can be used for system or algorithm tuning, production line testing and other tasks that require fast testing sequences and quick results; useful applications range from bit-rate optimization to end-to-end system testing.

Tektronix, U.K. Ltd., Fourth Ave., Globe Park, Marlow, Bucks. SL7 1YD; (01628) 403300; fax (01628) 403301 Circle (250) on Free Info Card

Compact disc recorder HHB Communications

• CDR800: a low-cost professional audio CD recorder that features rack mounting, in addition to balanced XLR analog inputs and unbalanced phono analog inputs and outputs; other features include




AES/EBU digital input and output and optical and coaxial digital I/Os; an onboard sample-rate converter makes direct digital copying from DAT machines and other digital formats simple; a unique stable platter mechanism supports the disc from below, minimizing vibration during recording, resulting in increased transparency and extended low frequency.

HHB Communications, 626 Santa Monica Blvd., Suite 110, Santa Monica, CA 90401; 310-319-1111; fax 310-319-1311 Circle (269) on Free Info Card

Non-linear video editing system Discreet Logic

• SMOKE: an on-line non-linear video editing system that is available on the SGI OCTANE workstation; SMOKE is designed as a pure editor and combines the basic editing tools of an analog suite with the productivity of a non-linear system; optional modules can enhance the editing capabilities allowing the flexibility to grow on a modular basis; this finishing tool is ideal for post-production facilities offering commercials, infomercials, as well as broadcasters requiring versioning of promos or sports news where speed is necessary. Discreet Logic, 5505 boul St Laurent #5200, Montreal, Quebec H2T 186 Canada; 800-869-3504 or 514-272-0525; fax 514-272-0585;

info@discreet.com; www.discreet.com Circle (253) on Free Info Card

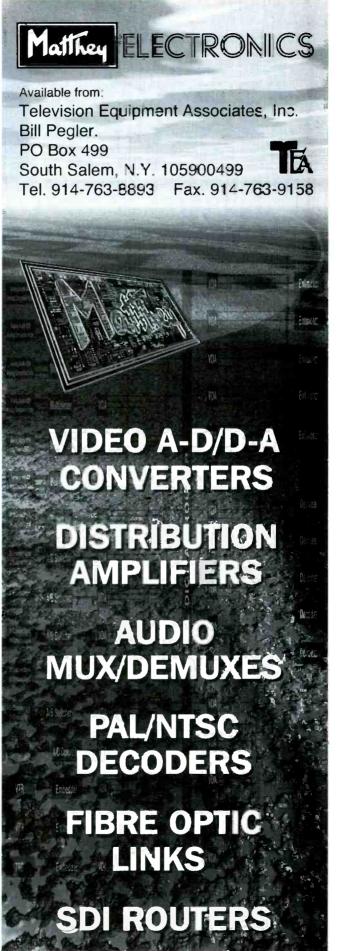

Circle (42) on Free Info Card

Seamless connection to Avid's Media Composer system SeaChange

• SPOT: this system connects directly to Avid Technology's Media Composer, a digital nonlinear video editing system, streamlining the production and delivery of commercials; new serial digital connectivity allows the production and delivery of commercials without the time and quality loss due to videotape transfer; the digital video server technology allows the sched-



uling and delivery of commercials on multiple channels and geographic zones; the easy-to-use SeaChange interface enables operators to control complex geographically specific commercial schedules on multiple channels.

SeaChange, 124 Acton St., Maynard, MA 01754; 508-897-0100; fax 508-897-0132; www.schange.com Circle (258) on Free Info Card

LAN to WAN and LAN to LAN facilities for video file servers **Tektronix**

• Profile VideoGateway: providing the first-time wide area networking (WAN) facility for the Tektronix Profile video file servers, the Profile Gateway allows facilities to move video content over telecommunications networks, for an alternative to existing courier, satellite and microwave



services; it facilitates inter- and intrafacility operation between two Profile workgroups using, in the first version, ATM networks; the Profile Video Gateway is an information packet (IP) router and it allows Profile video file servers operating on an Ethernet/Fibre Channel network to be connected to distant facilities via WAN services.

Tektronix, P.O. Box 500, Beaverton, OR 97077-0001; 800-547-8949; fax 503-627-7275 Circle (262) on Free Info Card

GP3 MASTER CLOCK & Time Code Cenerator

Equipped with an internal 8-channel GPS receiver, you can now have time, date and time code within 130 nanoseconds of perfect accuracy anywhere in the world. The ES-185A's best feature is the price, \$2495.



STANDARD FEATURES INCLUDE:

- · SMPTE/EBU, ESE, IRIG-B, ASCII time Code Outputs
- 1PPS Output 8 Satellite Tracking Battery Back-up
- GPS " Lock" Indicator Automatic Daylight Savings Time Correction
- Time Zone Offset Antenna 3 Year Warranty AND MORE!

OPTIONAL FEATURES INCLUDE:

- *Parallel BCD Output •1 KPPS •10 MHz Output •220 VAC •12 VDC
- · Video Inserter · Video Sync-Generator



www.ese-web.com 2 SIERRA ST., EL SEGUNDO, CA 90245 USA 310-322-2136 FAX: 310-322-8127

Circle (43) on Free Info Card



Disk-based news playback system



Sony Electronics

 NCS-300: this cost-efficient stand-alone news playback system provides disk-based storage of edited material; it accepts rundowns from third-party systems, allowing the pieces to be sequenced automatically so they meet the requirements of the newscast; each item can be aired in order or the sequence can be changed with a keystroke; it can be configured to use up to eight filing positions, and using the 4:2:2 Profile of MPEG-2 compression to efficiently store material on RAID disk arrays, the system can be configured for three to 12 hours of storage.

Sony Electronics, 1 Sony Dr., Park Ridge, NJ 07656; 800-686-SONY; www.sony.com/professional Circle (259) on Free Info Card



On-line editor Accom



• Axial 3000: the latest addition to the Axial on-line editor family has all the features of the Axial 2010, but at a lower price and in a fully upgradeable system; the Axial 3000 has an expandable architecture that is based on a standard platform and supports "plug-in" system options; software options include Random Access Visual Editing (RAVE), a full-quality nonlinear editing environment and ShowCase software modules.


Accom, 1490 O'Brien Dr., Menlo Park, CA 94025; 650-328-3818; fax 650-327-2511; www.accom.com Circle (260) on Free Info Card

82

Book on resolving conflicts

The Compelling Communications Group

• Getting What You Want: Resolving Conflict and Winning Agreement Every Time: this book offers a three-step method to forge better agreements more easily in everyday life, plus 100 "yes" triggers of persuasion (now in 19 languages and 32 college and corporate courses); the author is Kare



Anderson, a gut-instincts expert, former Wall Street Journal reporter and Emmy-winner; the book costs \$22; a free on-line, monthly newsletter is available by E-mailing "SIB" to kareand@aol.com; you can also find over 300 tips at web site http://www.sayitbetter.com.

The Compelling Communications Group, 15 Sausalito Blvd., Sausalito, CA 94965; www.sayitbetter.com Circle (290) on Free Info Card

Integrate and automate business operations Columbine IDS

• Paradigm: a totally integrated management information system that electronically links all critical business processes of broadcast multichannel systems, cable network and DBS operations, including ad sales, programming, traffic, finance and master control automation; a number of modules are built around and inte-

grated in a central relational database; the entire business operation of a facility is automated from the proposal generation and scheduling down to building the playlist that goes to the master control automation system.


Columbine JDS, 1707 Cole Blvd., Golden, CO 80401-3296; 303-237-4000; fax 303-237-0085; www.cjds.com Circle (264) on Free Info Card




Application package for spot insertion and program playback Hewlett-Packard

• MediaStream AirDirect: a low-cost application package for MediaStream recorders that allows you to move to digital technology and go on-air with basic ad/spot insertion and program-playback capabilities from dub to air via a simple PC interface; offering entrylevel functionality, including VTR-source dubbing, accurate playback, playlist editing, AsRun logs, remote playout control via GPI, database management and trimming.

Hewlett-Packard, Test & Measurement Organization, P.O. Box 50637, Palo Alto, CA 94303-95120; 800-452-4844 (ext. 5520); www.hp.com/go/tmdir Circle (261) on Free Info Card

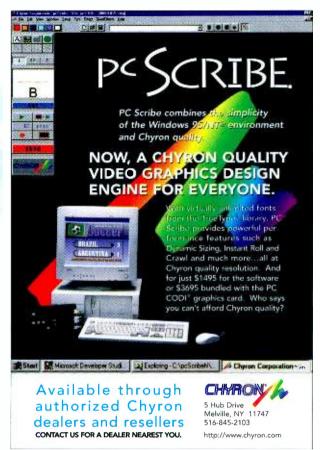

Circle (44) on Free Info Card

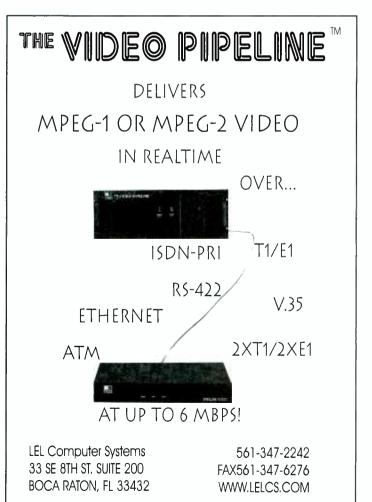

Circle (45) on Free Info Card

File server station Winsted Corporation

• LRx series: these file server stations are designed for the file server and LAN markets and feature steel, L-frame architecture; you can mix and match the modular components and each system includes smooth rolling wheels; the basic L-frame comes with a stationary server shelf for multiple servers or a pullout server shelf for



individual servers; the sliding server shelves have optional retractable cable lacing guides that help keep cables in place while the server shelf is pulled out, and the pull-out keyboard shelves come in flat or tiered versions.

Winsted, 10901 Hampshire Ave. South, Minneapolis, MN 55438-2385; 612-944-9050; fax 612-944-1546; www.winsted.com; racks@winsted.com Circle (267) on Free Info Card

Comprehensive monitoring unit Leader Instruments Corporation

• Model LT 5910: this comprehensive monitoring unit reports compliance with vital aspects of SMPTE 259M and 244M standards and reads out SDI signal conditions, including level in terms of equivalent cable length and an eye-pattern dis-



play; EDH errors are caught and logged with provision for remote alarms and printer drive; other monitoring functions include a 16-channel audio status readout and full EDH reporting that includes FFCRC and APCRC codes and readout of all EDH flags.

Leader, 380 Oser Ave., Hauppauge, NY 11788; 800-645-5104 or 516-231-6900; fax 516-231-5295 Circle (265) on Free Info Card

12 PRECISION VIDEO TEST SIGNALS, AUDIO TONE \$469



- TSG-50 generates 12 composite video test signals plus 1Khz or 400Hz audio tone, and composite sync.
- All test signals computer calculated and digitally synthesized for perfect RS 170A accuracy with no drift or SCH adjustments required
- · Convenient 12 position rotary switch for quick, easy pattern selection. 13th signal of 100% white field can be substituted for full field color bars.
- 30/60 second timer switches from pattern to black after timeout. • Ref Frame Pulse/59.97 Hz output. • 9-14 volts DC powered for portable use. AC adapter included. • TSG-50B model adds 5 black
- outputs or 4 black plus subcarrier \$628. Also available in rackmount version.

Unconditional Guarantee.

P.O. Box 3993, Mission Viejo, CA 92690 (714) 489-0240

Circle (47) on Free Info Card

<u> Fone Jack</u>

A Portable Audio Generator

features

- 1 Hz-29,999 Hz (1 Hz steps)
- Sine and Square wave outputs
- RS-232 controllable
- Store and Recall 10 user frequencies
- Uses 9 V battery or jack for external power
- Log sweep from 50 Hz to 20 kHz
- Auto stepping thru user frequency list

VISIT OUR, WEB SITE

Tone burst (1 mS to 29.999 seconds)



1602 Carolina St · PO Box 1342 · Bellingham, WA 98227 1.800.645.1061 360.734.4323 FAX 360.676.4822

Circle (46) on Free Info Card

New software & smaller version of Oxford digital consoles

Sonv

• Oxford digital consoles: model OXFR3 24C0 is an addition to the Oxford digital consoles that is more compact and lower in cost; Sony has also launched a software upgrade for the Oxford digital consoles, version 1.1; the software includes multiformat panning and monitoring of all standard surround-sound formats (including LCRS, 5.1 and SDDS), control linking, enhanced EQ algorithms, increased delay functionality, partial mix loads and greater automation capabilities; these advanced features will be used in the 24C24 version, as well as the new Oxford 24C0.

Sony, 1 Sony Dr., Park Ridge, NJ 07656; 800-686-SONY www.sony.com/proaudio Circle (252) on Free Info Card



Closed-captioning encoder Evertz



• 8070: a digital closed-captioning encoder that generates line 21 caption data directly into the digital bitstream; the 8070 features direct keying, internal modem and V-chip support; it allows data to be encoded into all caption and text channels in field 1 and 2 of video, and extended data services packets can be encoded into field 2 supporting services, such as station name and call letter identification, program name, classification and remaining air time.

Evertz, 3465 Mainway, Burlington, Ontario, Canada L7M 1A9; 905-335-3700: fax 905-335-3573: sales@evertz.com Circle (268) on Free Info Card



Circle (48) on Free Info Card

letters to the editor


Continued from page 8

Correction:

 Γ he diagram in Transition to Digital (BE, Aug. 1997, p.16) contained an error. The author of the figure explains how the waveform is developed.

"Because of the bit-shuffling process described in SMPTE-259M, a digital video bitstream has many edges. A digital component signal has a bit rate of 270Mb/s. If successive "1s" are sent, each successive bit cell will alternate between high and low states. An alternate high and low state can be brought together and be thought of as one square wave.

This square wave would have a fundamental frequency of 135MHz. To create square waves, you need the odd harmonics of this 135MHz fundamental. Therefore, the band of frequencies extending from 0 to

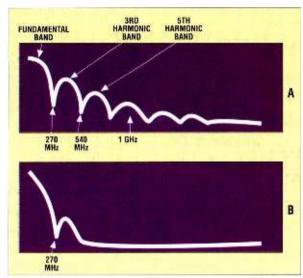

Correct labeling of the SDI spectrum.

270MHz is the fundamental band of energy in a digital bitstream. The second energy band is the third harmonic centered at 405MHz (3*135MHz). The third band is the fifth harmonic band, etc.

Looking at the spectrum analyzer display, what strikes most first-time observers is that there is a null in energy at 270MHz. Even though the bit rate is at 270MHz, very little information is present at that frequency. The small spike seen at 270MHz is mostly clock crosstalk from the SDI driver circuitry.

IIM BOSTON

Send your thoughts to the editor at

CompuServe 74672,3124 or fax to 913-967-1905.



Circle (50) on Free Info Card



DTV is here and DIELECTRIC is ready with...

- DTV antennas
- DTV filters
- DTV combiners
- DTV transmission line
- DTV waveguide NEW



DTV feasibility studies

Call today for a copy of our DTV Planning Guide

DIELECTRIC

Tower Road • Raymond, ME 04071 (207) 655-4555 • Fax (207) 655-7120 email + dielectric@maine.com www.dielectric.com

Circle (49) on Free Info Card

89



THE PROFESSIONAL'S SOURCE FOR PHOTO,

FOR ORDERS CALL:

800-947-9928

212-444-5028

OR FAX (24 HOURS):

800-947-9003

212-444-5001

Store & Mail Order Hours: Sun 10-4:45 • Mon & Tues 9-6 Wed & Thurs 9-7:15 Fri 9-1 • Sat Closed

On the Web: http://www.bhphatovidea.com

Sachtler Touch and Go System Integrated sliding battery plate Strengthened dynamic counterbal-ance in 2 steps Frictionless leak proof fluid damping

with three levels of drag

• Vibrationless vertical and horizontal

HOT POD TRIPOD
SERIES

brakes
- Built in bubble for horizontal

sachtler === VIDEO 14/100 FLUID HEAD

elevation force of the center column is factory set and doesn't require any setup. When moving to another location it can be car-**ENG TWO-STAGE TRIPOD SERIES**

can de locked in seconds with Sachider's quick clamping. There as also heavy duly versions for extra stability. The heavy duly alu-minum has a 20mm clameter tube vs. 16mm and the heavy duly carbon fiber has a 24mm diameter tube vs. 22mm. All fieavy duty two-stage tripods have a folding tripod handle.

Now Sachiler quality is available to low budget users. The price of a CADDY system includes the new 7-step dampened CADDY fluid head ultra-light but rugged carbon fiber tripod, lightweight spreader and either a soft bag or cover. The CADDY fluid head features an adjustable pan arm, 7 step adjustment for quick counter balance and the set-flocking Sachiter Touch and 60 System.

CAD 01 Single-Stage ENG Carbon Fiber System / Fluid Head • ENG Single-Stage Carbon Fiber Trip

he sinks, smooth action of each whiter hold head is the pro-be finest quality cast and machined parts functioning toge fluid environment. They are engineering masterpieces, perate under extreme conditions. They're engineered to ionally fine tolerances and their mechanisms are protected effect

- Miller 20 Series II Fluid Head

 Dynamic Itula drag control
 Silding/quck release camera platform
 Weighs 4 lbs. handles up to 22 lbs.
 Counterbalance system compensates
 for nose heavy or fail heavy camera
 configurations and permits lingering
 control of the camera throughout the
 till range
 includes independent pan and till
 locks. bubble level, dual pan handle
 carriers and integrated 75mm ball levelling



- **Hitter Zo-Series II FIBIU Reau

 **100mm ball level flud head **Pobust, lightweept low profile design

 **Quick release camera platform **Weighs 7/bs -handles up to 25 lbs.

 **Multi-step fluid drag system and integrated counterblance system provide ultra-smooth, repeatable pan-and-fill fluid control
 and finger-tip camer balance for ENG camcorders, industrial CCD

- #bull-Lightweight Iripod

 Weighs 4.5 lbs. supports up to 30 lbs.

 Minimum height down to 24', maximum height to 57'

 Extremely portable, folds down to 33'

 Englineered from thermoplastic moldings.

- diecast alloy and hard anodized tubular alloy
- Fast, one turn, captive leg locks
 Includes 75mm (3") ball levelling bow

#649-2-Stage Tripod

- Two extensions sections on each leg. Operates at low levels as well as normal heights without the use of mini legs. High torsional rigidity, no pan backlash. High torsional rigidity is to all backlash. Weights 6 6 lbs. supports 50 lbs. Very portable, folds to 27° Includes 75mm (3) ball levelling bowl.

System 20 #338-Miller 20 Head, 601 Lightweight Tripod,

System 20 ENG #339--Miller 20 Head, 649 2-Stage Aluminum,

System 25 #500—Miller 25 Head, 611 Lightweight Tripod,

Vision SD 12

Pan and Tilt Head with Serial Drag

on SD 12 head features "Serial Drag" pan and tilt system, consists of a unique, permanently-sealed fluid drag and an dd lubricated friction drag. You achieve the smoothest pans regardless of speed, drag setting and ambient temperature

- and this regardless of speed drag setting and ambient temperature. Pattented spring-assisted counter-balance system permits per-lect "hands-off" camera balance over full 180° of till. Instant drag system breakway and recovery overcome mertia and friction for excellent "whip pans". Consistent drag levels in both pan and till axis. Filick on, flick off pan and till caliber disc brakes. Greater control, precision, flexibility and "bouch" Touch activated, time delayed illuminated level bubble. Working conditions from as low as 40° up to 460°C. SD 12 weighs 6.6 bis and supports up to 35 bis.

Vision Two Stage ENG and LT Carbon Fibre ENG Tripods

The ultimate in lightweight and innovative tripods, they are avail-able with durable tubular alloy (Model #3513) or the stronger and lighter, axially & spirally wound carbon fiber construction (Model They incorporate torque sale clamps to provide fast, sale

#3523]. They incorporate forque safe clariflys to provide feat. Self-adjusting legiclamps.

*Torque Safe required, eliminating manual adjustment and maintenance and making for a much more reliable clamping system.

New hip point eliminates play and adds ranglus.

*They both feature 100mm levelling bowl, fold down to a com-

- pact 26", and support 45 lbs. #3513 weighs 6.5 lbs #3523 CF (Carbon Fibre) weighs 5.2 lbs

Vision 12 Systems
Vision 12 Systems
Vision 12 Systems
Vision 12 Systems
Vision 12 Systems and the decision of the system of the

SD-12D System SD-12A System

- SD-12 pan and tilt head
 3518-3 Single stage ENG
 tripod with 100mm bowl
 3363-3 Lightweight
 calibrated floor spreader

- SD-12 pan and lift head
 3513-3 Two-stage ENG tripod with 100mm bowl
 3314-3 Heavy-duty calibrated floor spreader

VIN-5ST and VIN-10ST

- Ideal for the latest generation of dockable and one-piece camcorders. Compact & lightweight, they maintain Vision performance
- bility with payloads up to 33 lbs. accessories
- VIN-5ST includes Vision 5LF head, single stage toggle clamp

tripod, spreader and soft case

tripod spreader and soft case.

VIN-10ST includes Vision 10LF head, single stage toggle clamp



IF+ Series 1/2-inch & 2/3-inch Zoom Lenses

Canon's IF- family of lenses are engineered to meet the needs of the next generation of broadci ing while meeting the standards of today. Beades having the widest wide angle lens available, I IF-le lens series have wider angles at shorter M.O.D. (Minimum Diget Distance), provide higher MTF performance and incorporate Hi-UD glass for reduced chromatic aberration. In addition to superb optics they re all designed with Canons "Ergonomo Cirj" for fartique-free shooting over extended time. IF-lenses are your assurance of unsurpassed quality and performance for today.

A next generation internal focusing lens with the shortest MOD and widest angle of any standard lens, the J15aXBB IRS/IAS is a standard ENG lens that lets you shoot in tight or restricted areas at the closest minimum object dis-tance ever possible and capture more of the subject. It incorporates all the mance. Hi-UD glass, square lens hood and Canon's "Ergonomic Grip"

Excellent for ENG, sports and production, the J20aX8B (IRS/IAS) lets you squeeze in shots from 8mm and still take you all the way out to 320mm with its built-in extender incorporates all IF+ teatures, plus is the only lens hood, enabling rotation of attached filters.

GY-X2B 3-CCD S-VHS Camcorder



KY-D29 3-CCD Color Video Camera

One of the most sensitive cameras ever developed, the KY-D29 sets the standard for 3-CCD cameras and is also ideally suited for today's digital recording formats With a sensitivity F1 at 2,000 lux, the KY-D29 can shoot in light as low as a remarkable 0.51 k.i. It also offers a signal-to-noise ratio of 65 dB (with its DNR function on), and delivers 850 lines of horizontal resolution. The exceptional resolution and sensitivity of the KY-D29 are achieved by three new 760,000 pixel 2/3" interline transfer (IT) CCDs, the highest pixel count in the industry.

\$500

ersatile Oocking Capability
Extremely high quality 4:2.2 digital recordings can be made by
docking the KY-D29 to JVC's Digital-S BR-D40 dockable
recorder This digital combo produces recordings tar superior to
any component analog camcorder, or 4.1.1 digital
camcorder The KY-D29 also docks directly to JVC's BR-DV10
DV-format and BR-9422 S-VHS dockable recorders andcan dock
to Betacam SP recorders using an adapter.

- Stretch/Black Compression circuit is also included.







P100 Portable Pneumatic Pedestal

The P100 is a small size pedestal that offers great flexibility out taking up too much space. Featuring an advanced air pr system, the P100 smoothly handles loads up to system, the Friod smoothly hardles roads up to 66lbs., easily accomodating professional cameras used in a studio, ideal for CATV, small studios, event and wedding video as well as all kinds of rial and institutional applications.

Air Pressure System:

- Air Pressure System:

 Air pump attached to the main body frame allows a rit to be pumped into a column anywhere and anytime even while a camera is mounted on the pedestal. This allows you to check and adjust the air pressure while using the pedestal and avoid over-filling of wischarging air through a bleed valve when too much air has been pumped into the column. There is also a relief valve that automatically lets air out when air pressure inside the column exceeds the unform value. Bringing the body many the professor is the unform value bringing to below the unform value.

and quickly. Wheels and caster axiles are easily fixed by ple stopper system.

A track lock mechanism locks the wheels of the pedestal so that

A track lock mechanism locks the wheels of the pedestal so that it only moves in a desired position.

Cable guards prevent the casters from rolling over and becoming tangled in camera cables when the tripod is moved around in a studio.

Large steering wheel alfords greater ease in handling when shifting columns up and down or when moving the pedestal Maximum and minimum helpith is 31" to 61". By attaching the optional LA-100 Low Angle Adapter to the dolly for shooting at low anoles. (Height from the regurd to movint is only 10".)

optional CA-100 Low Angle Adapter to the doily for shooting low angles. (Height from the ground to mount is only 10"). The column and dolly can be quickly disassembled for convinient transport. The column weighs 18 lbs. and the dolly 16

H80 Professional Fluid Head

H80 supports up to 37 lbs, and has a 100mm claw-ball to

H70 Professional Fluid Head

H70 Professional Future Teach H70 Professional Future Teach H70's patented counter balance mechanism supports various operating configurations including stand-alone cameras, charge viewfinders. Perfect balance cameras with large viewfinders. Perfect balance can be obtained with settings from 0 to 3, depending on camera weight (from 15 to 33 lbs.) and till angle.

Sidning balance plate features a locking mechanism and allow a total of 4" (100mm) of travel for camera balance. Has a 100mm claw ball.



Built-in internal time code generator lets you record with SMPTE LTC/VITC (Longitudinal/Vertical Interval) time code

wDP-800H "LS" Package:

• DP-800H Supercam 3-CCD camera head with
1.5" electronic viewfinder and Anton Bauer Gold

Mount battery plate
Fujinon S14x7.5 BRM 14:1 servo zoom lens
CC-8800 soft carrying case

WV-QT700 tripod mounting plate

S-VHS 3-CCD Digital Signal Processing Camcorder

Broadcast & Television Systems

Panasonic Panasonic

- Three high-density 380,000 pixel CCDs with half-pitch pixel offset achieves 750 lines of horizontal resolution, S/N ratio of 60dB and sensitivity of 18 at 2000 lux. Additionally the Frame Interline Transfer (FIT) CCDs minimize vertical smear even in very bright illumination.

- cal smear even in very bright illumination.

 Digital Signal Processing circuitry provides four valuable benefits

 1) Consistently reliable up-to-spec performance.

 2) Fine adjustiment of a wide range of parameters.

 3) Memory storage and instant recall of specific settings.

 4) More flexible and higher quality image processing easier maintenance in the storage and instant recall of specific settings.

 4) More flexible and higher quality image processing easier maintenance in the storage of 80 dB as well as two linear audio channels with Dolby NR

 + Has a 26 pm connector for convenient backup recordings using an additional VCR equipped with a 26 or 14-pm connector.

 Phantom power can be supplied to an optional mic. Power can be switched off to prevent battery drain when not in use. be switched off to prevent battery drain when not in use.

DP-800H "XL" Package

- DP-800H Supercam 3-CCD camera head w/1.5" electronic viewfinder and Anton Bauer Gold Mount battery plate
- Fujinon S14x7 5 BRM 14-1 servo zoom tens
- CC-H800 Thermodyne hard shell carrying case
 WV-QT700 tripod mounting plate
- . Two Anton Bauer Digital Trimpack 14 batteries
- Anton Bauer 2-position quick charger







VIDEO and PRO AUDIO

TO INQUIRE ABOUT YOUR ORDER:

800 221-5743 • 212 239-7765

800 947-2215 • 212 239-7549

OR FAX 24 HOURS:









New Address: 420 Ninth Ave. (Bet. 33rd & 34th St.) New York, N.Y. 10001



POWER VEST SYSTEM

and convenience of a photo-journalist style vest with the power of NRG's high est capacity power belt. Available in two styles, the Field model is designed for use in a field production environment, while the **Event** model is for shooting events where style is everything. The Field model is ruggedly constructed from black high density weatherized



12 hrs.) and can be used with the optional Intelliquick Fast

POWER CAN SERIES

Poer SEES

For power pan give or multiple pieces of 12v DC equipment for extended periods of time, nothing beats the power and convenience of NRGs Power-Can Series It mitegrates an ultra-high capacity, high-discharge-capable UPS type lead ado power cell, a world-wide fast charger, and computer-composition of the properties of equipment is smultaneously. From a midnight emergency scene to a wedding. From a midnight emergency scene to a wedding.

- easy transport.

 Available in 18 28 and 40 amp versions, each Power-Can has either four cigarette lighter connectors, four 4-pin XLR connectors or two of each.



Blackburst/Sync/Tone Generator

e BSG-50 provides an economical means for generating the ist common RS-170A video timing signals used to operate vari-s video switchers, effects generators, TBCs, VCRs, cameras and

- video edit controllers

 6 BNC videophuse outputs

 Now available 6 blackburst, 4 sync, 2 subcarrier

 Each sync output individually settable for composite sync, composite blanking, H-drive, or V-drive.

 Separate buffer for each output-maximum signal isolation

 *KHZ, 086 sinevave audio fone output, locked to video

 Outputs can easily be configured to meet.

CSG-50 Color Bar/Sync/ Tone Generator

Generates full/SMPTE color bars, blackburst and composite

and composite sync signals. Built-in timer can automatically switch video output from color bars to color black after 30 or 60 seconds. Easy with cytole output from color bars to color black after 30 or 60 seconds. Easy with color bars and black. Front panel selection of full-field or SMPTE color bar patterns or colorblack (blackburst) video output. Includes crystal controlled 1 kTz ddB audio tope output.

- coronaex (plackourst) video output.
 Includes crystal-controlled, 1KHz, OdB audio tone output.
 Outputs: video, sync, ref frame, 1 KHz, OdB
 Audio tone switches to silence and color bars change to black
- when using 30/60 second timer Fully RS-170A SC/H phased and always correct. No adjustment required.

WE STOCK THE FULL LINE OF HORITA PRODUCTS INCLUDING:
Window Dub Inserter
Generator/Inserter/Search Speed Reader

VG-50

Has all of the above plus RS-232 control. VITC Generator, LTC-VITC Translator VLT-50 -

VITC Generator, LTC-VITC Translator VITC-To-LTC Translator VITC-To-LTC Translator / RS-232 Control Hi8 (EVD-9800/9850)TC to LTC Translator NTSC Test Signal Generator Serial Control Titler "Industrial" CG. Time-Oate Slamp, Time Code Captioning Sale Area, Convergence Pattern and Oscilloscope Line Trigger and Generator

SAG-50 -





V-16 AND V-20

Professional Camera Stabilization Systems

THE GLIDECAM V-16 and V-20 Camera Stabilization Systems allow you to walk, run, go up and down starrs, shoot from moving vehicles and travel over uneven terrain without any camera instability or shake. Designed primarily for professional video and 16mm motion picture cameras, the Glidecam V-16 stabilizes cameras vehiging from 10 to 20 pounds and the V-20 from 15 to 26 pounds. They are both perfect for shooting the type of ultra-smooth tracking shots that take your audience's and client sibreat away—instantly adding high production value to every scene. With either of the "V" series rlabilizers you'll be able to offer the type of professional shooting techniques that were previously available only to clients with full budgets. Whether you are shooting commercials, indicatinates, documentaries, music vedeos, news, or full length motion pictures, the Glidecam "V" ≘ries will take you where few others have traveled.



THE dildecam Support vest
The lightweight and comfortable Support Vest can be adjusted to fit a wide range of operators. High endurance, closed cell, EVA foam padding and integral T6 alumnium alloy create a vest which can hold and evenly distribute the weight of the Glidecam V-16 and V-20 ms tem across the operator's shoulders, back, and hips. For safety, quick release high impact buckles allow the vest to be removed quickly

The Three Axis Gimble

The Three Axis Gimble
A free floating precision Gimble incorporating integrally Shielded
Bearings creates the super-smooth and pivotal connections
between the front end of the Dyna-Elastic arm and the Camera
Mounting Assembly. The Three Axis Gimble provides the operator
with lingest up control over tillud fitting, panning and rolling A
locking mechanism allows the Gimble to be placed at varying
positions on the Central Support Post. Moving the Gimble effectively adjusts the Systems Center of Gravity. The upper portion of
the Siler's central symbort nost includes muld metabous. These the Sled's central support post includes guide markings. These markings allow for accurate gimble positioning.

The Dyna-Elastic Arm

The Exsisted al. Dyna-Elastic Armi The Exsisted al. Dyna-Elastic Support Arm is designed to counteract the weight of the combined camera and Camera Mounting Assembly by employing high carbon alloy springs. The arm may be boomed up and combined as well as protect in and out, and side to side. It is the combined service and the combined service to side. It is described by the combined and only and side to side. It is the combined service are the combined service to side. It is the combined service to side. arm which creates the shock absorption necessary for ultrasmooth camera movement and mobility. The spring force is field adjustable to allow for varying camera weights. For safety, a Dual-Spring design is employed to reduce spring failure damage.

ViP Video Lighting System

Designed for video. VIP systems provide 55 to 500 wait capabilities, powered by AC or DC. Mount one on-camera, on-stand, or hand hold it. Some VIPs leature adjustable beam angles. All are light weight and convention cooled.

V-light

Efficient enough to light a small room yet small enough to fit in a large pocket, the V-light provides a broad key light, back light or fill light (with umbrella or gel)

- fill light (with umbrella or gel)
 Extreme wide-angle multi-use halogen source
 Mounts on stand, clamps, boom, wall, window, door-top
 500 watt, AC powered (limps not included)

i-light

Battery powered light provides excellent fill light, eye-light, or high-lights, with good contrast control for news and documentary Shooting.

Small and lightweight (18 oz.) for on carrera use

Multi-use 6.1 focusing range with +100 lainp (lamps not included)

55 or 100 watt (1274 volls DC)

Includes cig. lighter connector or optional 4-pin XLR

Pro-light

Pro-light

- Can be used as a low-level key or accent light, fill light (w/diffusion), backlight or background light (w/diffusion), backlight or background light Multi-use haliogen, focusing/filling controlled with one hand 125 or 250 wat 12, 010 wat 12 voit, or 200 wat 30 volt DC Optional cigarette, 4-pm and 5-pm XLR connectors
- included

Tota-Light

Provides a base or bounce light, backlight, or background light. Use it with an umbrella or gel frame with a diffusion kit. It is an ideal fill light or small soft key or liulimitation for copy work. • Multi-use halogen source with 360° no-yoke tilting - Ohoice of 300, 500, 650, or 750 wath AC lamps, froit included - Gull-wing reflectors close compactly for storage and travel

Omni-Light

Produces the ideal key or back-light, and with diffusion or an umbrella, it becomes a great soif fill source. With accessores, hand-hold the Dmni, camera mount it, or choose from a wide variety of mounting systems.

- Multi-use halogen source provides a non-crossover beam.

- Choice of optional quick-change.

Super-Spot Reflector for exceptionally long throws at all voltages.

- Choice of lamps: 420 or 500 wait 120 v AC, 650 wait 220/240 v AC, 250 wait 30 volt DC, 100 wait 12 volt DC (lamps not included).

DP System

Only 3.9 pounds the DP Light offers a very powerful key, backlight, or background light with or without diffusion. When used with its umbrella or diffusion it provides a soft key, fill, or side light. It includes a #1 reflector for an 8:1 focusing range and a large cool-

- operating hand grip and knobs.

 Multi-use halogen source with 170° no-yoke tilting

 Choice of 500, 750, or 1000 watts 120 volts;

 650 or 1000 watts 220/240 volts (Lamps not included).

antonaver to be the **Logic Series DIGITAL Gold Mount Batteries**

The Logic Series DIGITAL batteries are acknowledged to be the most advanced in the rechargeable battery industry. In addition to the comprehensive sensors integral to all Logic Series batteries, each DIGITAL battery has a built-in microprocessor that communicates directly with Anton/Bauer InterActive chargers, creating significant new benchmarks for reliability, performance, and life. They also complete the communications network between battery, charger and camera. With the network in place, DIGITAL batteries deliver the feature most requested by cameramen: a reliable and accurate indication of remaining battery power.



DIGITAL PRO PACS

The ultimate professional video battery and recommended for all applications. The premium heavy duty Olgital Pro Pac cell is designed to deliver long life and high performance even under high current loads and adverse conditions. It's size and weight recate a video to the conditions. balance with all camcorders

 DIGITAL PRO PAC 14 LOGIC SERIES NICAD BATTERY Watt Hours, 5 1/8 lbs. Run time: 2 hours @ 27 watts

• OIGITAL PRO PAC 13 LOGIC SERIES NICAD BATTERY Hours 4 3/4 lbs Run time: 2 hours @ 25 watts. 3 hours @ 17 watts

QUAD 2702/2401

Four-Position Power/Chargers

Extremely small and light weight, the Digital Trimpac still has more effective energy than two NP style slider in batteries. High voltage design and Logic Series technology eliminate the problems that cripple conventional 12 volt slide-in type batteries. The professional choice for applications drawing less than 24 watts

• DIGITAL TRIMPAC 14 LOGIC SERIES NICAD BATTERY 14.4 v 43 Watt Hours, 2 3/4 lbs. Run time, 2 hours @ 20 watts, 3 hours @ 13 watts

InterActive 2000 Power/Chargers Dual 2702/2401 **Two-Position Power/Chargers**

Two-Position Power/Chargers

The OUAL 2701 (70 wat)
and 2401 (40 wait) are
sleek, rugged and economical two positions
Power/Chargers that have
all the features of InterActive
2000 technology including
DC camera output and LCD
display The DUAL 2701 will
charges any Gold Mount battery
in one hour, the DUAL 2401
charges Propac batteries in two hours and Trimpacs in one. Their
compact, lightweight package design makes them the ultimate tra
el Power/Chargers. They can also be upgraded with the
Diagnostic/Discharge Modules and/or with the Expansion Charge
Modules to charge up to six batteries of any type.





G-30 2.39	PG-60	2.59	PG-120.	2.79
Super	ior Grade I	Souble Coa	ited VHS	
GG-30 3.39	SG-60	3.99	SG-120	4.49
H4	171S S-VHS	Double Co	ated	
ST-30 6.99	ST-60	7.49	ST-120	7.99
	/1221 Hi 8 E	Inuble Coa	ted	
Metal Partic				ated
P630HMP	4.99	E630HM	E	8.39
P660HMP	6.49	E660HM	E	10.49
P6120HMP	8.49	E6120HN	ИЕ	13.99
M3	21SP Meta	Betacam	(Box)	
5S17.95				19.95
OS 22.95				
	DP121	DVC PRO		
2M (Med.) 8.29	23M	9.99	33M	12.99
3M 22.49	64L (Lq.)	23.99	94L	33.99
23L				43.99
			4.6	
	\mathbf{n}			

ľ	na	Xe		
_	Hi8 Metal Pa			
P6-120 XRM				6.59
Broado	ast Quality	Hi8 Metal F	Particle	
P6-30 HM BQ	5.39	P6-60 HM	BQ	6.09
P6-120 HM BQ				7.99
	P/I PLL	IS VHS		
T-30 Plus1.69	T-60 Plus	.1.99	T-90 Plus .	2.09
T-120 Plus	2.19	T-160 Plus	\$	2.69
	HGX-PLUS	VHS (Box)		
HGXT-60 Plus	2.69	HGXT-120	Plus	2.99
HGXT-160 Plus				3.99
BQ B	roadcast Q	uality VHS	(Box)	
T-30 BQ5.49	T-60 BQ	6.19	T-120 BQ	7.39
BQ F	rofessional	S-VHS (In	Box)	
ST-31 BQ	7.19	ST-62 BQ		7.99
ST-126 BQ	8.39	ST-182 BC	2	17.49
	Betaca	am SP		
35MSP15.75	B10MSP	.17.75	B20MSP	19.75
330MSP20.75	B60MLSP	. 29.75	B90MLSP.	46.45
		~		

'anasonic.

	Mini D	V Tape	
AY DVM-30 9	.99	AY DVM-60	11.99
	DVC	PRO	
AJ-P12M (Medium)8	.49	AJ-P23M	9.99
AJ-P33M13	.49	AJ-P63M	22.99
AJ-P64L (Large)24	.99	AJ-P94L	34.99
AJ-P123L			44.99
			_
		RIV	

5(JIN Y

 Hi-8 Professional Metal Video Cassettes

 IPX
 4.59
 P6-30 HMEX

 IPX
 6.59
 P6-60 HMEX

 IPX
 8.89
 P6-120HMEX
 P6-30 HMPX P6-60 HMPX 11.49 P6-120HMPX Hi-8 Metal Evaporated Editor (HMEAD) 14.8910.49 E6-60 HMEAD E6-120 HMEAD PR Series Professional Grade VHS T-30PR 2 79

PM Series Premier Grade Professional VHS
T-30PM 3.49 T-60PM 2.00 T-60PM 4.79 BA Series Premier Hi-Grade Broadcast VHS (In Box) T-30BA 4 79 ..3.59 T-60BA. ...3.99 T-120BA MQ Master Quality S-VHS (In Box)
MQST-30 7.49 MQST-60 7.99 MQST-120 BRS 3/4" U-matic Broadcast Standard (In Box)

KCS-10 BRS (mini) ... 8.29 KCS-20 BRS (mini) ... 8.29 KCS-20 BRS (mini) ... 8.19 KCA-20 BRS ... 8.19 KCA-20 BRS ... 8.69 KCA-20 BRS ... 8.69 KCA-20 BRS ... 8.69 KCA-20 BRS ... 8.69 13.39 XBR 3/4" U-matic Broadcast Master (In Box)
KCS-10 XBR (mini) 8.79 KCS-20 XBR (mini)
KCA-10 XBR 9.29 KCA-20 XBR
KCA-30 XBR 11.99 KCA-60 XBR 10.19 KSP 3/4" U-matic SP Broadcast (In Box) KSP-S10 (mini) 11.09 11.59

9.59 KSP-S20 (mini) 10.09 KSP-20 12.99 KSP-60 KSP-10.. KSP-30... 16.99 15.99

| BCT-20M (small) | 17.99 | BCT-30M (small) | BCT-30M (small) | BCT-30M | 27.99 | BCT-90ML | 27.99 | BCT-90M .19.95 DV-120MEM. 29.95 DV-180MEM 34.95

 DV-120MEM
 29.95
 DV-180MEM
 34.95

 PVD Series Professional DVCAM Tape

 PDVM-12ME (Mini)
 24.95
 PDVM-22ME (Mini)
 26.95

 PDV-32ME (Mini)
 29.95
 PDV-40ME (Mini)
 31.95

 PDV-64ME (Standard)
 3.95
 PDV-94ME (Standard)
 3.99

 PDV-124ME (Standard)
 49.95
 PDV-184ME (Standard)
 59.95

Four-Position Power/Chargers

The lightest (and simmest) full featured four position chargers ever They can fast charge four Gold Mount batteries and can be expanded to charge up to eight. They also ofter power from any AC man: all in a package the size of a notebook computer and weighing a mere four libs! The 40 wort 2401 can charge ProPacs in two hours and TimPacs in one. Add the Diagnostic/ Discharge module and the OLAD 2401 becomes an all puriose power and test system. The 70 wart QUAD 2702 bundles all Power/Charger features in the ultimate professional power system.

www.americanradiohistorv.com

Circle (54) on Free Info Card

SEVEN DAY CUSTOMER SATISFACTION GUARANTEE



THE PROFESSIONAL'S SOURCE FOR PHOTO,

FOR ORDERS CALL: 800-947-9928 212-444-5028

OR FAX (24 HOURS): 800-947-9003

212-444-5001

MOST ORDERS SHIPPED WITHIN 24 HOURS **OVERNIGHT SERVICE AVAILABLE**

On the Web: http://www.bhphotovideo.com

Panasonic

WJ-MX50 Digital A/V Mixer

- . Four input switcher and any two sources can be

- Tour input swincer and any two sources can be routed to the program busses
 Two-channel digital frame synchronization permits special effects in each A/B bus.
 Combination of 7 basic patterns and other effects creates 287 wipe patterns.
 External edit control imput for RS-232 or RS-422 serial controls, Also has GPI input.

- all controls. Also has GP1 input.

 Wipe boundary effects soft/border (bold. 8 back-ground colors available)

 Digital effects: strobe, still, mosaic, negative/ positive, paint, monochrome, strobe, trail, and AV synchro

 Real-Time compression entire source image is
- compressed inside a wipe pattern
- "Scene Grabber" move a pattern while upholding the initially trimmed-in picture integrity
- Non Additive Mix (NAM); selects between A and B sources, passing only this signal with the high-est luminance.

 The second of the se
- · Fade-in and tadeout video, aiidio, titles individually or synchronously faded
- Down stream keyer with selectable sources from character generator or external camera
- · Eight separate memories enable instant recall of frequently used effects
- B preset effects including: Mosaic Mix. Position Stream Corkscrew.
 Bounce Flip, Shutter, Vibrate, and Satellite
 Audio mixing capability of 5 sources with 5 audio level adjustments.

BT-S1360Y

13 Color Video Production Monitor

The BT-S1360Y is a full-function, professional 13 i production monitor with a wealth of features. They include: superb 420-line horizontal resolution. S-Video input and output, advanced auto-matic white balance circuity, blue-only mode, underscan and pulse-cross. All this, housed in a rugged, rack mountable metal-ilybrid cabinet. So, for long-term reliability in any professional. application, the BT-S1360Y is the ideal choice

- incorporates advanced, proprietary white balance circuitry that stabilizes white balance to provide outstanding picture performance automatically.
- S-Video input and advanced video circuit technology provides a remarkably sharp picture with over 420 lines of horizontal res · External sync inputs and outputs provide for synchronization
- with other equipment fed with the same sync signal
- Blue Only mode plus Chroma selection provide a monochrome image for fine adjustment of contrast, brightness, chrominance & hue.
- · Pulse Cross displays horizontal and vertical intervals at the center of the screen so you can examine data in the blanking area and also sync/burst timing
- the scanned area of the picture tube enabling the entire active picture area to he displayed. Lets you
- detect intruding cameras and mike booms
- Switchable color temperatures of 6500°K (broadcast standard) or 9300°K (for pleasing picture)
- · Built-in speaker and headphone jac
- . Back-mountable with optional BA-131 brackets

BT-S 1360Y Olympic Demo Special!

We have a limited stock of BT-S1360Y monitors that were used by Panasonic exclusively at the 1996 Olympics in Atlanta. Used only by Panasonic engineers in broadcasting the summer games, these monitors are like new.

Demo Special \$599

(\$400 less than our regular selling price on this monitor)

PVM-14N1U/14N2U & 20N1U/20N2U

13" & 19" Presentation Monitors

With high quality performance and flexibility, Sony's presentation monitors are ideal for any environment. They use Sony's legendary Trinitron CRT and Beam Current Feedback Circuit for high endary Immitron CRT and Beam Current Feedback Unique for high resolution of 500 lines as well as stable color reproduction. They also accept worldwide video signals, have a built-in speaker and are rack mountable. Four models, the PVM-14NTU/20NTU are designed for simple picture velwing the PVM-14NTU and 20N2U add RISB input and switchable aspect ratio for more sophisticated

- **S00 lines of resolution to match DV. DVCAM and DVCPRO recording capabilities

 **Beam Gurrent Feadback for color temperature stability
- They handle four worldwide color systems: NTSC, NTSC 4 43
- PAL and SECAM reen display in five languages. Picture adjustments (chrome
- On screen display in five languages. Picture adjustments (circon phase, contrast, brightness) and setup adjustments (volume, aspect ratio) are displayed as easy-to-read on screen menus.
 Built-in speaker for small audiences without the expense of an
- external sound system

- Closed captioning is available with the optional BKM-104 Caption Vision Board
- · Designed with a sturdy metal cabinet for stability, durability and rack mounting. The 13-inch series mount in a 19inch rack with the MB-502B Rack Mount Bracket The 19-inch
- Only
- Remote Control (Last Input Switch) Contact closure remote con-Amende bornor (Lasi inpin swint) – Contact Losse reinde born froi allows you to wire a remote to an existing system so that the monitor's input can be remotely controlled to switch between the last previously selected input and the current input • With the PVM-14NU2 and PVM-20N2U Series, the aspect ratio
- is switchable between 4.3 and 16.9 simply by pressing a button

PVM-14N2U/20N2U

PVM-14M2U/14M4U & 20M2U/20M4U 13" & 19" Production Monitors

Sony's best production monitors ever, the PVM-M Series provide stunning picture quality, ease of use and a range of optional functions. They are identical except that the "M4" models incorporate Sony's state-of-the-art HR Trintron CRT display technology and have SMPTE C phosphours instead of P22.

HR Trintron CRT enables the PVM-14M-VII and 20M-VII to display an incredible 800 lines of horizontal resolution. The PVM-14M2U and 20M-VII use an aperture grille do pitch of 0.25mm to offer 800 lines of resolution. M4 models also use SMPTE-C phosphours for the the noted (vicial resolution of an explore production).

- phosphours for the most critical evaluation of any color subject Dark tint for a higher contrast ratio (black to white) and crisper
- Dark lint for a higher contrast ratio (black to white) and crisper. sharper looking edges.
 Beam Current Feadback Circuit 4.3/16.9 switchable aspect ratio.
 Each has two composite (BNC), one S. Video and component input.
 Fach has two composite (BNC), one S. Video and component input.
 Fach has two composite (BNC), one S. Video and component input.
 Fach has two component level can be adjusted according to the input. system. Optional serial digital interface kit BKM-101C (video) and BKM-102 (audio) for SMPTE 259M component serial digital input
- True multi-system monitors they are equipped to handle higher system signals, NTSC, NTSC 4.43, PAL, and SECAM

- External sync input and output for synchronization with other equipment. Can be set so that if will automatically switch. according to the input selected
- according to the input selected.

 Switchable color temp: 6500K (broadcast), 9300K (pleasing picture). User preset (3200K to 10000K).

 Underscan and H/V delay capability. In underscan mode the entire active picture area is displayed, allowing you to view the entire image and check the picture edges. H/V delay allows viewing of the blanking area and synchburst timp.

 Using color bars as a reference, Chroma-Phase setup mode tacilitates the complex, declate procedure of inonitor adjustment. Especially convenient when used with computer-based edition systems.
- On-screen menus for monitor adjustment/operation
- On-screen meius for monitor agiusment/operation Parallel remote control and Tally via 20-pin connector
 Sub control mode allows fine, on-screen adjustment of the center detent value of the contrast, hinghitess, Chroma and phase knobs.
 PVM-14MZU/M4U mount in a 19-inch rack with the M8-5028 Rack Mount Bracker. The 20MZU/M4U monitors mount with the SLR-103A Slide Rail Kri.





Condenser Microphones

Unlike traditional condenser microphones, the capacitive transducer in Sennheiser condenser microphones is part of a tuned RF-discriminator circuit. Its output is a relatively low impedance audio signal which allows further processing by conventional bi-polar low inose solid state circuits. Sennheiser microphones achieve a balanced floating output without the need for audio transformers, and insures a fast distortion-free response to audio transents over an extended frequency range. The Ecception yellows approximately and incomparative processing the processing transfer and incomparative grown to burnific. RF-design yields exceptionally low noise levels and is virtually immune to humidi ty and moisture. The comparatively low RF-voltage across the elements of the ty and moisture. The comparatively low RF-voltage across the elements of the transducer also eliminates acroing and DC-bas creeping currents. Senihelser employs RF-technology to control residual microphone noise. Optimizing the transducer's acoustic impedance results in a further improvement in low noise per-tormance. Senihelser studio condenser microphones operating according to this RF-principle have proven their superior ruggedness and reliability in the past every conceivable environmental condition



MKH 40 P48U3 Cardioid

- Highly versatile, low distortion push-pull element
- Transformerless RF condenser, both output level.
- Transparent response, switchable proximity EQ. Recommended for most situations, including digital recording, overdibibling vocals, percussive sound, acoustic guitars, piano, brass and string. instruments, Mid-Side (M-S) stereo, and conventional X-Y stereo Vocals when used with a pop-screen.

MKH 60 P48U3

Short Shotgun

· Short interference tube RF condenser

- Lightweight metal alloy, transformerless, low noise, symmetrics capsule design
- . Smooth off-axis frequency response. Handles extremely high SP (135 dB), ideal for broadcasting, film, video, sports recording interviewing in crowded or noisy environments. Excellent for stu-dio voiceovers.

Digital Multi-Track Recording

TASCAM

perfectly synchronized. It also guarantees perfect tracking and synchronization between all audio tracks on all cascaded decks - whether you have one deck or sixteen (up to 128).

 Incoming audio is digitized by the on-board 16-bit D/A at either 44.1 or 48KHz The frequency response is flat from 20Hz to 20KHz while the dynamic range exceeds 92dB

exceeds 920B Execute seamless Punch-ins and Punch- outs. This teature offers programmable digital crossfades, as well as the ability to insert new material accurately into tight spots. You can even delay individual tracks to generate special effects or compensate for poor timing.

SONY PCM-800



- Flawless sound quality, outstanding reliability and professional audio intertacing with AES/EBU digital I/O and XLR analog I/O connections
 Combines audio functions such as precise auto gunch involved tigital cross fade technology, external synchronization with SMPTE/EBU time code and selectable sampling frequencies of 44.1 and 48.kHz.
 Shuffle did if or precise tape control, variable speed playback of 6% in 0.1% increments and a flat frequency response from 204tz to 20kHz.
 Optional DABK-801 Sync Board provides SMPTE/EBU time code generation and chase sync. It locks to the incoming time code with substraina accurate offset—deal for autio-follow-video applications. Also synchronizes to setternal video reference signal.
 Optional RM-0800 provides comprehensive remote control over all PCM-800 functions. The RM-0800 can control up to six units for up to 48 channels of digital audio. up to 48 channels of digital audio

ALESIS adat xt

8-Track Digital Audio Recorder

An incredibly affordable tool, the ADAT-XT sets the standard in modular digital multi-track recording. With new features and enhanced capabilities, the ADAT-XT operates up to four times faster than the original ADAT, offers an intelligent software controlled tape transport and provides orboard digital editing and flexible autolocation.



- Advanced transport software continuously monitors autoloca-tion performance and the head constantly reads ADAT's built-in
- sample-accurate time code—even in fast wind modes.

 Dynamic Braking software lets the transport quickly wind to
- Servo-balanced 56-pin ELCO connector operates at +4dB to interface with consoles with +4 dB ba/unbal inputs/outputs Also unbalanced +10dB inputs/outputs (phono connectors).
 Has an electronic patch bay built-in so if can be used with
- stereo and 4-bus consoles.
- Make flawless copy/paste digital edits between machines of even within a single unit. Track Copy feature makes a digital clone of any track (or group of tracks) and copies it to any other track (or group) on the same recorder. This allows you to assemble composite tracks for digital editing





MTEX StudioCard

4-Channel Digital Audio Card for Windows

The next generation in digital audio for the desktop. StudioCard is a premium-quality digital audio adapter with advanced features, studio-quality specs and professional connections. Unmatched in quality, flexibility and expandability, if features 4 tracks of audio sound and real-time digital mixing capability, making if the deal board for musicians who want digital multitracking and mixing on their PC, or producers looking for a versatile board for post-production digital audio editing and uncompromised audio quality. StudioCard is Windows 95 plug and play compatible plus includes drivers for Windows NT as well.

- plus includes drivers for Windows NT as well.

 Key to StudioCard's amazing sound is the marriage of a low noise analog I/O section and high quality A/D and D/A converters. A PCI-hased 32-bit inemory mapped board it delivers less than 0.003% total harmonic distortion and 92dB dynamic range. Plus, a PLL-based sample clock generator that can be locked to an assortment of clock sources.

 Incorporates a programmable 32-bit 4.0 MHz DSP and pro connections like 4 independent balanced analog I/Os (+4-0Bu or -10 dBV) and AES/EBU or S/PDIF digital I/O. It also offers a MIDID port with deep buffers and time stamping. No matter which type of equipment you have StudioCard will integrate into standard studio environments.
- Compatible with film, video or MIDL StudioCard offers synchro-nization via SMPTE, MTC, word and pixel clocks, and composite video. Plus, the StudioCard not only reads SMPTE timecode, but generates it as well
- Unique to the Antex design is StudioCard's multiple adapter capability. This means you can install multiple StudioCards in a single computer for up to 16-track recording. Start with one StudioCard today add more StudioCard's tomorrow. Also included is an on-board SPx expansion connector for plugging. in optional daughtercards for compression or enhanced DS

VIDEO and PRO AUDIO










TO INQUIRE ABOUT YOUR ORDER: 800 221-5743 • 212 239-7765 OR FAX 24 HOURS: 800 947-2215 • 212 239-7549

New Address: 420 Ninth Ave. (Bet. 33rd & 34th St.) New York, N.Y. 10001





KNOX VIDEO

RS4x4/8x8/16x16/16x8/12x2

Video/Audio Matrix Routing Switchers

Video/Audio Matrix Routing Switch
assy-to-use and very affordable. Housed in an ultra-thin rackmount chasss
like accept and route (on the vertical interval) virtually any video signal,
including oif-the-air and non-timebase corrected video. They also route
alanced or unbalanced stereo audio. The audio follows the video or
ou can route the audio separately (breakaway audio). Each of the
switchers offers easy manual control via from panel operation. They can
sits o be controlled remotely by a computer, a knox RS Remote Controller
or by a Knox Remote Keypad via their RS-232 port. Front panel LEDs
indicate the current routed pattern at all times and an internal battery notica
and restores current apterns in case of power interruption. Totally versatile. Knox switchers are ideal
for applications such as studio-feed control and switcher input control, plus they have an internal timer allo
gri immed sequence of patterns for surveillance applications as well.

Accept and route two-volt mono or stereo urbalanced audio
inputs to any or all audio outputs.

Accept and route two-volt mono or stereo urbalanced audio
inputs to any or all audio outputs.

- inputs to any or all audio outputs.
 Video and audio inputs can be routed independently (breakaway stereo audio), they don't need to have the same destination. Can store and recall preset cross-point patterns, (Not available
- on RS12x2.) Front panel key-pad operation allows easy manual operation

- From panier key-pad operation anove sasy manual operation.
 Gan also be controlled via RS-232 interface with optional RS Remote Controller or Remote Keypad
 Internal timer allows manual or automatic timed sequence of patterns —ideal for surveillance applications
 Front panel LED indicators display the present routing patterns at all times.
- · An internal battery remembers and restores the current
- Internal vertical interval switching firmware allows on-air
- Housed in a thin profile rackmount 1" chassis.
 Also except the RS12x2 are available in S-V deo versions.
- Models BS16x8 and BS16x16 are also available in BGB/compo-
- With optional Remote Video Readout, the RS16v8 and RS16v16
- With optional Remote Video Readout, the RS16x8 and RS16 and display active routes on a monitor at remote locations, composite signal route and another are rorted locations, composite signal route and r



loading allows power-on

lurbing others in the system All cabling can remain in place while you service" any module. An intelligent "centerplane" provides power, sync, luming and data distribution, facilitating expansion to more complex, more cost-effective signal processing functions.

The Nova StudioFrame Series is a modular, flexible, digital/analog signal processing system. It is designed to efficiently and effectively combine a wide variety of individual function (or processor) boards such as A-D and D-A converters, viceo signal encoders and decoders, audio and video distribution amplifiers and frame synchronizers into more complex function groups, all in one equipment maintrame. The scalable nature of the StudioFrame design allows it to be easily reconfigured and/or upgraded as today swideo standards and requirements continue to evolve. The system is based on two rackmount frame models (the SF-3 and SF-1) allowing up to thirteen front loading processor boards and turteen rear mounted passive interface cards to be accommodation and the studios of the st A universal power supply operates at either 110 or 240 VAC, 50/60 cycle, DC operation is optionally available as is a redundant supply with

removal/insertion of individual processing modules without dis

NovaASD/NovaSDA

Analog to Serial Digital & Serial Digital to Analog Converters
Components of the Nova StudioFrame series, the NovaASD and the NovaSDA incorporate the latest digital
video processing techniques for high speed A-D and D-A signal conversion. They are designed to meet
the most stringent broadcast requirements and their "not swappable" front card loading facilitates servicing without disturbing other cards in the system. The NovaASDA is ideal to for interfacing anallog signals with digital video formats and the NovaSDA for interfacing serial digital signals with

SDA-1 Serial Digital Component to Analog Component Converter

- Component (D1) input,
 Equalized and reclocked serial digital
 component output
 Analog component video (Y, R-Y, B-
- Y/YUV), RGB or RGB/S outputs
- 10-bit D/A converters
- Output level control
 NTSC and PAL compatible
- ASD-1 Analog Component to Serial

Digital Component Converter Analog component video (Y, R-Y, B-Y/YUV), RGB or RGB/S input Dual SMPTE 259M 4:2:2 Serial Digital

- Component (D1) outputs 10-bit D/A converters

Composite and S-Video Converter

- SMPTE 259M 4:2:2: Serial Digital Component (D1) Input,
 Equalized and reclocked serial digital component output
- Dual composite & dual S-Video outputs
- · Color bar output selectable
- · 10-bit D/A converters

ASD-2 Analog Composite and S-Video to Serial Digital

- S-video to Serial Original
 Component Converter
 Analog composite and S-Video input
 Dual SMPTE 259M -4:2:2 Serial Digital
 Component (D1) outputs
 10-bit D/A converters
 NTSC and PAL compatible

Serial Dinital Composite to Analon Video

Converter - SMPTE 259M Serial Digital Composite

- SMPTE 259M Serial Digital Composit (D2,D3) input;
 Equalized and reclocked serial digital

- Four analog composite video outputs
 Color bar output selectable 10-bit D/A converters

ASD-3 Analog Composite to Serial Digital Composite Converter

- Analog composite video input
 Dual SMPTE 259M 4:2:2 Serial Digital

NOVAMNR Median Noise Reducer

The NovaMNR is a StudioFrame card that eliminates impulse and transmission noise, cleans up satellite, microwave and fiber teeds and fills in CODEC and time-based corrected videotape drop-outs. It features full bandwidth, uncompressed 10-bit digitar processing for utilimate video transparency as well as analog composite imputs and outputs.

- Eliminates 'sparklies', those black and white dost that sometimes appear on remote video feeds. The NovaMNR incorporates a proprietary adaptive three-dimensional median filter that analyzes pixels from several fields of video and replaces the impulse noise with uncontaminated, clean video.

Inversal drop-out compensation replaces missing video information, whether it is mature-base-corrected VRS source or the feededed output of a CODEC feet. The

- In a lime-base-corrected VCR source or the decoded output of a CODEC feed. The raMNR effectively fills in drop-outs with replacement video from the surrounding is and previous video field
- are remoteable via RJ-11 jack
- . Also available in PAL and PAL-M versions

C-8 RGB/Component to Composite/S-Video Encoder

processing, 8-bit D/A conversion setton delay, frame of memory riposite and one S-video output RGB (Sync on Green or all three), RGB/Sync and YUV)) inputs. Also available with looping inputs immance notch filter e-comb filtering for maximum encoding performance

- Remote serial control Dutput level control
- Color bar output selectable
- . Designed to meet the most stringent broadcast requirements wappable" front card loading facilitates servicing without

VIDEONICS POWE

Animated Postscript Character and Graphics Generator

The most advanced character generator ever designed for video production, multimedia and industrial applications, PowerScript delivers the huge range of titles and graphics supported industrial applications, PowerScript delivers the huge range of titles and graphics supported by PostScript display technology, plus animation, effects, transparency and color keying, it features two GPI inputs, anti-aliased, 17.5 ns (nanosecond) pixel resolution and 4.2.2 broad-cast-quality video. It also offers high-speed RISC processing to provide real-time Level 2 PostScript maging and fast rendering—even with the most complex mages. The PowerScript works stand-alone or with a computer, has a built-in TBC, offers a powerful and intuitive interface, and is suitable for the desktop or can be rackmounted

Powerful Character Generator

- Choose from 35 built-in fonts or download PostScript fonts from your PC. PowerScript's nigh-speed RISC processor provides real time PostScript imaging.
 Characters can be rolated at any angle, scaled to any size.
- stretched horizontally or vertically.

 Styles include variable bold and italic, underline and shadow (drop shadow, variable displacement and opacity). Each charac-
- ter can be adjusted separately. Text can be adjusted separately.
 Text can be positioned anywhere on the screen or automatically centered, vertically or horizontally .Left, right, top, bottom and
- center justification is also provided.

 Characters are automatically kerned, using the font's standard kerning information. Spacing is highly flexible with variable word and letter spacing and line spacing (leading).

Intuitive User Interface

- Built-in real-ime object-based drawing tool and text editor—computer or software required. Design can be done a head of time and displayed later, or can be done on the fly.
 Supplied keyboard and mouse are used with easy on-screen menus to judice and modify graphics and text.
 Change fonts, colors, and other characters instantly.

Transparency and Colors

- Characters can be made transpærent (9-100%) over video, other characters and graphics with 64 levels of transparency.
 Opaque characters can use over 4,000,000 colors. transparent characters can use over 8,000.
 Different colors can be used for fill and outline (wariable).
- Different colors can be used for fill and outline (variable width) as well as each letter and each graphic.

Roll, Scrawl, Animation, Effects

- Variable speed roll, crawl and push (slide) in all directions
 Variable speed roll, crawl and push (slide) in all directions
 Every text object, graphic and logo can be animated. Complex animations include having elements follow paths, bounce, etc
 Elements can change outline and/or fill color, transparency, posi
- tion as they move and results are displayed in real time Move individual characters in different directions; make colors change, flash words: make letters and words bounce: spin a let-ter across the screen. Use fades and wipes to transition between titles and video or between two pages of titles.

titles and video or between two pages of titles

Ackgrounds and Graphics

**Ittles can be placed on solid color, patterned or graduated backgrounds, or they can be genlocked to incoming video. Lines, squares, rectangles, ovals and circles can be created and placed anywhere on the screen. Each graphic object can use a different color, transparency rotation, size fill and outline.

Imported Logos and Graphics

**Accepts most PostScript or PCX format graphics without modification. Imported images can be any size and can be scaled, skewed, and rotated when placed on screen Transparency and anti-aliasing can be defined when graphic is generated. anti-aliasing can be defined when graphic is generated

anti-aliasing can be defined when graphic is generated.

Expansion Capabilities

Although PowerScript operates on its own, you can still add

peripherals and connect to a computer or network. Two PC-card

slots allow the addition of non-volatile flash-RAM and Ethernet

cards. RS-232 port allows connection to desktop computers for

added storage and downloading of fonts or graphics from a PC

Manufacturing test and measurement equipment for over 40 years. Leader Instruments is the standard which others are measured against for reliability, performance, and most the standard which others are measured against for reliability, performance, and most one responsibility of the standard standard standard standard standard standard standard standard environmental and other factors far exceeding actual operating conditions. These include high humidity, extremes of heta: Cold, shock and vibration. Manufacturing quality is built in every step of the way and only the finest parts are used. At each production run, subassembles are separately tested before they are integrated into the finished product, then each product is tested again. This is why less than half of 1% of all Leader products are ever returned for warranty repair or adjustment.



5860C WAVEFORM MONITOR

A two-input waveform monitor, the 5860C features 1H, 1V, 2H, 2V, 1 s/drv and 2V mag time bases as well as vertical amplifier response choices of flat, IRE (low pass), chroma and DIF-STEP. The latter facilitates easy checks of luminance linearity using the staircase signal. A PIX MDN output jack feeds observed (A or 3) signals to a picture monitor, and the unit accepts an external syptic reference, abuilting calibrator and on-off control of the DC restorer is also provided.

5850C VECTORSCOPE

The ideal companion for the \$860C Waveform Monitor, the \$850C adds simultaneous side-by-side waveform and vector monitoring. Featured is an electronically-generated vector scale that precludes the need for fussy centering adjustments and eases phase adjustments from relatively long viewing distances Provision is made for selecting the phase reference from either A or 8 inputs or a separate external timing reference.

5100 4-Channel Component / Composite WAVEFORM

The 5100 handles three channels of component signals, plus a fourth channel for composite signals, in inixed component / composite facilities, Features are overlaid and parade waveform displays, component vector displays, and automatic bow-tie or "shark hin" displays for timing checks. Menu-driven options select format (525/60, 625/60, and 1125/60 HDTV), full line-select, vector calibration, preset front-panel setups and more. On-screen readout of scan rates, line-select, preset numbers, trigger source, cursor time and volts.

5100D Digital Waveform/Vectorscope

The 51000 can work in component digital as well as component analog facilities (and mixed operations). It provides comprehensive waveform, vector, timing and picture monitoring capabilities. Menu driven control functions extend familiar waveform observations into highly specialized areas and include local calibration control, the ability to show or blank SAV/EAV signals in both the waveform and picture, the ability to monitor digital signals in GBR or YCbCr form, line select (with an adjustable window), memory storage of test setups with the ability to provide on-screen labels, flexible cursor measurements, automatic 525/60 and 625/50 operation and much much more

5870 Waveform/Vectorscope w/SCH and Line Select

A two-channel Waveform/Vector monitor, the microprocessor-run 5870 permits overfaid waveform and vector displays, as well as over-laid A and B inputs for precision amplitude and timingiphase matching, Use of decoded R-7 allows relatively high-resolution DG and DP measurements. The 5870 adds a procision SCH measurement with on-screen inumerical readout of error with an analog display of SCH error over field and line lines Full-raster line select is also featured with on-screen readout of selected lines, a strobe on the PIX MDN output signal to highlight the selected line, and preset for up to nine lines for routine clocks.

5872A Combination Waveform/Vectorscope
Models 5872A offers all the operating advantages of the 5870, except for the following: SCH is deleted from the 58

5864A Waveform Monitor



A two-input waveform monitor that offers full monitoring facilities for cameras, VCRs and video transmis-sion links. The 5864A offers front panel selection of A or B inputs, the choice of 2H or 2V display with sweep magnification, and flat fre quency response or the inser-tion of an IRE filter. In addi-

tion, a switchable gain boost of X4 magnifies setup to 30 IRE units, and a dashed graticule line at 30 units on screen facilitates easy setting of master pedestal. Intensity and focus are fixed and automatic for optimum display. Supplied with an instruction manual and DC power cable

5854 Vectorscope

A dual channe torscope, the 5854 provides pre cision checkout of camera encoders and camera balance as well as the means for precise genlock adjustments for two or more video sources. Front panel controls choose between A and B inputs for display and between A and B for decoder reference. Gain is fixed or variable, with front panel controls for gain and phase adjust-

pedestal. Intensity and focus are fixed and automatic for opinium display. Supplied with an instruction manual and DC power cable.

Designed for EFP and ENG (electronic field production and electronic news gathering) operations, the field and powered from NP-1 batteries, battery belts and vehicle power. Careful thought has been given to the reduction of operating controls to facilitate the maximum in monitoring options with the operating simplicity demanded in field work.

The GALLERY

Shively Labs Series 2000 UHF **Broadcast Antennas B-Line* Transmission Line** Shively Labs offers superior engineering support and accessibility from your first contact through the life of your Shively UHF broadcast system. Call us today to discuss your DTV requirements. Offering Complete Solutions for Your **DTV Requirements!** UHF, FM & MMDS Antennas and Related RF Equipment

Circle (57) on Free Info Card

The Secret is Out!

Two of the world's largest DBS operators have our OmniJET™ Machine Control Server

and DTx-800™ DTMF transceiver systems.

And that's only the beginning. How about independent router control,

advanced digital ad insertion, client server machine control, router pro

tocol conversion and much more for your scalable system automation

DTx-800"

Don't wait... get yours NOW!

• OTMF cue tones 8 channel

receive AND transmit

· Built-in GPIO and Relay,

with LTC reader option...

Check out these features:

OmniJET'

• LAN/WAN TCP/IP

• VSYNC/LTC input

• Web Browser set-up

· Sony S-BUS interface

• RS-422 Ports

P.O.Box 389, Bridgton, Maine 04009 USA Tel.: (207) 647-3327 FAX: (207) 647-8273



Neutrik, Canare, John Fluke & Motorola

Call, Fax or E-mail Stanley Marks for your Free Copy [NY] Ph.:718-361-1100 Fax 718 392 7654

Nationwide 1-800-HLDALIS E-mail: hldalis@ix.netcom.com

H.L. DALIS Inc.

35-35 24th St, Long Island City, NY 11106

TRIED THE REST? NOW TRY THE BEST!

Circle (56) on Free Info Card

CONVERGENCE

of high quality sound and low cost





Enhanced Betacam VCRs

- 4 audio channels for any PVW or UVW Betacam VCR
- AFM kits are easy to install in your UVW or PVW VCR



Los Angeles 1840 Flower Street Glendale, CA 91201

New York 500 W. 37th Street, 2nd Floor New York NY 10018

818.551.5858

212.268.8800

www.broadcaststore.com

Dealer inquiries welcome.

Circle (61) on Free Info Card

Slow Motion Controller They got their PEG-2 machines under

Compression control... so what Decompression Noise Reduction are you waiting for?

> Broadcast contribution quality video



- Supports main level/main profile and main level/professional
- Real-time encoding/decoding of CCIR601 resolution in 4:2:2 chroma format
- Selectable parameters of bit rate (2 to 45 Mb/s), profile and GOP structure

LEITCH

http://www.leitch.com U.S.A. (800) 231-9673 · Canada (800) 387-0233

Circle (59) on Free Info Card

for Demanding Sports Production





Slow Motion Controller, \$3000

- All the features and functions you would expect to find on an \$8,000 to \$12,000 slow motion controller!
- Control up to 4 VTRs
- Simple and easy to use. Small spacesaving footprint.
- Quickly and easily store and recall up to 100 cue points per VTR.
- T-Bar or detented wheel provide fast & easy slomo control
- Can be customized for your specific application

Another Control Solution From .



DNF Industries 9970 Glenoaks Blvd., Suite D, Sun Valley, CA 91352 Phone: (818) 252-0198 FAX: (818) 252-0199

Circle (58) on Free Info Card

P.O. Box 66378 Scotts Valley, CA 95067 Tel:(408) 336-8867 Fax:(408) 336-8525 pacific computing

Circle (60) on Free Info Card

The GALLERY

HENRY ENGINEERING

503 Key Vista Drive Sierra Madre, CA 91024 USA TEL (818) 355-3656 FAX (818) 355-0077 FAX-on-Demand Doc #103 (818) 355-4210 http://www.henryeng.com



USDA is a handy 2-in, 4-out stereo "mini-DA" that can combine or split audio signals for distribution. Mix stereo to mono, get both stereo and mono outputs from a stereo source. Gain trims for each output. Great specs with lots of headroom. Keep one on hand!



We Build Solutions.

Circle (64) on Free Info Card



BAF BROADCAST VEHICLES

SNV, ENG, EFP, Radio ENG/SNV Vehicles (800) 633-8223 ADDRESS 314-316 Northstar Ct., Sanford FL 32771 Local (407) 324-8250 FAX (407) 324-7860 E-MAIL baf@gate.net WEB http://www.bafcom.com

BAF Satellite Space(800) 966-3822 Best price & service, domestic & international • KU & C-Band, SNG & long-term rates LOCAL (804) 221-0544 FAX (804) 221-0818 E-MAIL 2059198.mcimail.com

ADDRESS Unit 2, Tything Park; Arden Forest Industrial Estate; Alcester, Warwickshire, B49 6ES UK FAX +44 1789 765 855







Circle (62) on Free Info Card

For Rigid Line & Components

New installation? Facility upgrade? "Right Now" emergency?

MYAT is the solution for dependable quality, maximum performance, long life and on-time delivery.

Call MYAT at 201-767-5380 or FAX 201-767-4147 for our complete catalog and reference guide.



Circle (63) on Free Info Card

The results are in... WinMasterCGTM

is the leading Master Control application for the Chyron Codi











LOGOS

TV RATINGS

EAS

SCHOOL CLOSINGS TIME & TEMP

Finally a Master Control Character Generator Program with the Master Control Operator in mind.

WinMasterCG has the new 44 TV Guidelines Ratings Icons Manually or with timed display fade accomplished with a click of the mouse. WinMasterCG has an incredible list of features for the Chyron Codi and supports 36 file formats which are translated to Codi format within WinMasterCG. Simply click on the desired icon and your MC task will be accomplished in seconds.

"WinMasterCG is the simple solution for Master Control"



For more information: 1-800-273-4033 FAX (561) 776-8464



See our web site at www.broadcastsoftware.com for a free demo and additional features.

STATEMENT OF OWNERSHIP

Statement of Ownership, Management and Circulation (Act of Aug. 12, 1970; Section 3685, Title 39, United States Code).

- 1. Title of publication: Broadcast Engineering.
- Publication number: 0007-1994.
- Date of filing: Sept. 24, 1997.
 Issue frequency: Monthly, except for semi-monthly in July and December.
- Number of issues published annually: 14.
 Annual subscription price: FREE TO QUALIFIED.
 Complete mailing address of known office of publication (street, city, county, state, zip code): Intertec Publishing Corporation, 9800 Metcalf, Johnson County, Overland Park, KS, 66212-2215.
- 8. Complete mailing address of the headquarters of general business offices of the publishers (not printers): Intertec Publishing Corporation, 9800 Metcalf, Johnson County, Overland Park, KS, 66212-2215
- Outny, Overland Park, KS, 00212-2213.

 9. Full names and mailing addresses of publisher, editor and managing editor. Publisher: Dennis Triola, 9800 Metcalf. Overland Park, KS 66212-2215. Editor: Brad Dick, 9800 Metcalf, Overland Park, KS 66212-2215. Managing Editor: Tom Cook, 9800 Metcalf, Overland Park, CS 6212-2215. Park, KS 66212-2215
- 10. Owner (If owned by a corporation, its name and address must be stated and also immediately thereunder the names and addresses of stockholders owning or holding 1% or more of total amount of stock. If owned by a partnership or other unincorporated firm, its name and address, as well as that of each individual must be stated.): K-III Corporation, 745 5th Avenue, New York,
- 11. Known bondholders, mortgagees and other security holders owning or holding 1% or more of total amount of bonds, mortgages or other securities (if there are none. so state).: None
- 12. Tax status: Has not changed during preceding 12
- 13. Publication title: Broadcast Engineering.14. Issue date for circulation data below: September

Extent and nature of circulation:

Average No. copies	Single issue
each issue during	nearest to
preceding 12 months	filing date
	_ 0
A. Total No.	
copies printed	
(Net press run)36,786	36.275
B. Paid and/or	
requested circulation	
Sales through dealers	
and carriers, street	
vendors and	
counter sales0	0
2. Mail subscriptions32,426	32,378
C. Total paid and/or	
requested circulation32,426	32,378
D. Free distribution by	J 75
mail (samples,	
complimentary	
and other free)2,642	2.626
E. Free distribution	
outside the mail	
(carriers or	
other means)518	500
F. Total free	
distribution	
(Sum of D and E)3,160	3,126
G. Total distribution	
(Sum of C and F)35,586	35,504
H. Copies not distributed	
 Office use, leftovers, 	
spoiled	771
2. Returns from	
news agents0	0
I. Total (Sum of G,	
H1 and H2)36,786	36,275
Percent paid and/or	
requested circulation	
(C/G x 100)91.1%	91.2%

I certify that all information furnished on this form is true and complete. I understand that anyone who furnishes false or misleading information on this form or who omits material or information requested on the form may be subject to criminal sanctions (including fines and imp onment) and/or civil sanctions (including multiple damages and civil penalties).

Dennis Triola,

<u>industry</u> briefs

Business

Panasonic, Secaucus, NI, is shipping the AJ-HD2000 digital highdefinition (HD) recorder, a costeffective approach to HDTV broadcasting using the D-5 format. The



AJ-HD2000 incorporates a D-5 VTR and HDTV processor in a single-piece HDTV VTR with full production features.

Panasonic also announced several sales, including the purchase of \$8 million worth of DVCPRO equipment by Raycom Media Inc., Montgomery, AL. Raycom's purchase includes an initial \$2 million DVCPRO investment to outfit 10 stations in applications ranging from a complete station conversion to DVCPRO editing-only and acquisition-only installations.

Fox Television Group, Los Angeles, and Comark, Southwick, MA, signed an agreement that offers DTV transmitters to the network's ownedand-operated stations. Under terms of the agreement, Comark will offer Fox's O&Os digital and NTSC transmitters through 2002, and will also extend a specially negotiated offer of DTV equipment and services to FOX affiliates.

ASC, Burbank, CA, announced that Canadian broadcaster CHBC-TV has purchased a six-channel VR300 video server system. The CHBC system will be configured with 30 hours of Fibre Channel storage to meet spot insertion and net delay requirements. The station plans to use one channel for ongoing recording, three channels for playback and two channels for network delay.

Canon, Lake Success, NY, announced the sale of its IFpro lenses to Spotlight Production Services, Dallas. Spotlight, which took delivery of three 18x IFpros, is building a three-camera mobile switching system that will incorporate them with three new Sony DVC-D30 digital cameras.

Hewlett-Packard, Santa Clara, CA, announced that British broadcaster Pearson Television Broadcasting has purchased and installed three MediaStream broadcast servers. The company, which chose H-P servers for their high storage and channel capacities and networking capabilities, will employ the new units to cache commercials and promotions for satellite channel transmissions.

Quantel, Darien, CT, and Matsushita, parent company of Panasonic, announced their intention to cooperate on the implementation of DVCPRO codec technology on Quantel products and systems. Final details of the alliance agreement are being defined.

CNN International will install a multichannel Profile system from Tektronix, Wilsonville, OR, at its Atlanta-based CNN Center. As part of the \$1 million deal, the new installation will incorporate multiple Profile PDR200 video server file servers, Profile PRS200A RAID 3 arrays and Profile PLS200 datatape library systems.



PEOPLE

Tim Thorsteinson has been named president of Tektronix VND, Beaverton, OR.

Daniel Wright has been named president and CEO of Scitex Digital Video, Redwood City, CA.

professional services

JOHN H. BATTISON P.E. CONSULTING BROADCAST ENGINEER, FCC APPLICATIONS AM, FM, TV, LPTV Antenna Design, Proofs, Fieldwork 2684 State Route 60 RD #1 Loudonville, OH 44842 419-994-3849 FAX 419-994-5419



RADIO AND TELEVISION

DANE E. ERICKSEN, P.E.

Box 280068 San Francisco, CA 94128 707/996-5200 707/996-5280 Fax

D.L. MARKLEY

& Associates, Inc.
CONSULTING ENGINEERS

2104 West Moss Ave.

Peoria, Illinois 61604 (309) 673-7511 FAX (309) 673-8128 Member AFCCE

Why not run your business card here?

Only \$144 per insertion. Frequency discounts available.

Call 800-896-9939

CHAN ASSOCIATES

Curtis Chan President

Public Relations • Advertising 1307 Shadow Lane, Suite C P.O. Box 5509 Fullerton, CA 92838-0509 Phone: (714) 447-4993 Fax. (714) 578-0284 Pager: (714) 506-1357 Email: cjchanistv.netcom.com CompuServe: 74601.2707

NETCOM

STATE OF THE ART ENGINEERING FOR AUDIO AND VIDEO

ENGINEERING DESIGN • CAD DRAFTING SERVICES

CABLE FABRICATION • PRE-WIRED PATCH PANEL RACKS

SYSTEM INSTALLATIONS • EQUIPMENT SALES

(201)837-8424

FAX: [201] 837-8384 1465 PALISADE AVE., TEANECK, NJ 07666

East Coast Video Systems

consultants • engineers • systems integrators

3 Mars Court Boonton, NJ: 07005 973.402.0104 Fax:973.402.0208 www.ecvs.com

on line <mark>in time</mark>

Stainless, inc.

50 Years of Broadcast Tower Design - Fabrication - Construction

210 S. Third St. Voice 215-699-4871 North Wales, PA 19454 Fax 215-699-9597

classified

oreowned broadcast video gear. Free listings. Online database Broadcast Fax-on-Demand



Belden

Mogami

Canare Cable

Highest Quality Assemblies Patch Panel Snake Systems & More! Great Prices - In stock **Unmatched Service!**

HAVE, INC. Dept. BE 800-999-4283

Whisper Koom OUND ISOLATION ENCLOSURES

> Vocal Booths **Broadcast Booths** etc...

PH: 423-585-5827 FAX: 423-585-5831

E-MAIL: whisper@lcs.com WEB SITE www.whisperroom.com 116 S. Sugar Hollow Road forristown, Tennessee 37813

BATTERY TOWN USA, ENERGY PLUS+, INC. http://www.mindspring.com/~battery batteries@energyplus.com. 770-975-8052 ext. 1; fax 8915 Best Value: 5.7AH "D" Cell. BP90 (71WH) \$147.00; PP90 Insert (71WH) \$115.00; Bricks (82WH) \$292.00; Brick Inserts (82WH) \$155.00; Rebuild Sealed Bricks (82WH) \$172.00; Belts, Film Packs, 56K USR Modems. Internet Access Special Promotion!



Circle (100) on Free Info Card

classified

FOR SALE

Buv Consign Sell



90 Day Warranty Labor, One Year on Parts

All Major Brands, Featuring:

NIGITAL S **Night Suite**

PINNACLE

SONY

Special this month!

AVID MC 1000





\$25,000 (one only)

LA 818.551.5858

Fax 818.551.0686

NY 212.268.8800

Fax 212.268.1858

www.broadcaststore.com

Circle (101) on Free Info Card

"On-Screen" Audio VU Meter

Would you like to see audio levels displayed along with video? The AM-50 accepts either balanced or unbalanced stereo inputs and shows their levels as a bargraph keyed into video. Features include normal, momentary peak hold, peak alarm hold, and phase check modes; solid or "see thru" display, black mask on/off, markers on/off. Change H and V size and position, channel ID, all selections saved in non-volatile memory. Use multiple AM-50stoshow more than two channels. UNCONDITIONAL GUARANTEE.

Contact your local video dealer or HORITA P.O. Box 3993, Mission Viejo CA 92690 (714) 489-0240

SERVICES

FULL-TIME TRANSPONDER SPACE AVAILABLE ON CABLE SATELLITE

located in the premiere cable neighborhood on SATCOM C-3 at 131 W, using General Instruments DigiCipher II (MPEG-2) video compression system. Your network could be seen using the new digital set-top technology, improving your network's chance of cable carriage. In addition to transponder space, uplinking, playback, editing, and duplication services are also available from our new digital uplink facility located in Englewood, CO.

Call Doug Greene @ 303-784-8809 or E-Mail at dougreene@aol.com

Chapman | Leonard **Studio & Production Center** Orlando, Florida

'State of the Art in Quality and Service' Fully Equipped 9000 Sq Ft Sound Stage Chapman Cranes, Dollies & Pedestals

Remote Camera Systems & More!



50' X 60' X 26' Hard Cyc Ask for a video on our facility!

Toll Free: (888) 33 STAGE www.chapman-leonard.com

* Studio Exchange * Burbank

(818) 840-1351 Fax (818) 840-1354

New and Used Video Equipment

Audio/Video Dealer **Starring**

Panasonic & Sony

BUY, SELL, TRADE & CONSIGN 816 N. Victory Blvd. Burbank, CA 91502

email: studioex@ecom.net www.studio-exchange.com

General Instrument IRD's 575 DSR-1500's & 80 DSR-2200's

Almost new, available for sale at a very low price!

Call now to place your order!

(714) 263-9900 x217

BUSINESS OPPORTUNITY

FULLY EQUIPPED VIDEO PRODUCTION, Post, Mass Duplication, Facility. South Florida 1 Owner. Established 12 years. Realistic terms. Turnkey operation. MUST SEE! 954-382-0007

Advertise in Broadcast Engineering Classifieds!

Attention C-Band Shoppers!

Galaxy VII Fully Protected Transponder

Available for Immediate Full-Time Use

Uplink from N.Y. with DigiCipher II MCPC

Below Market Rate!

Commit now for Huge Discount! Only Two Channels Left! First Come, First Served!

Call Today (714) 263-9900 x217

Discover the Advantages of Reprints!



For a quote or to discuss how reprints from this magazine can work for you--call me!

Cherie Wood, INTERTEC Publishing

Phone: 913-967-7212 Fax: 913-967-1900

classified

HELP WANTED

WE PLACE ENGINEERS USA & WORLDWIDE



KEYSTONE INT'L., INC. 16 Laflin Road, Suite 900 Pittston, PA 18640, USA

Phone (717) 655-7143 • Resume/Fax (717) 654-5765 E-mail: keyjobs@keystone.microserve.com

MAINTENANCE ENGINEER: Seeking candidate with 3 years experience maintaining Studio, ENG Microwave equipment and VHFTransmitters down to the component level. SBE certification is desirable. Contact Barry Gries, 4247 Dorr Street, Toledo, Ohio 43607. Phone: 419-531-1313

VIACOM O&O in sunny South Florida seeks a Maintenance Engineer who would like the opportunity to work with the latest technology including tapeless Master Control operating multiple TV stations! If you have experience repairing and maintaining a major TV broadcast/production facility, can trouble-shoot at component level, have working knowledge of BTS switchers, Phillips media pool, Harris Transmitters, Avid Media Composers, Chyron Max, and Sony 1" and BetaCam formats, we're looking for you! RF experience and SBE certification a plus! Send resume & cover letter to: Dept. #ME-211, WBFS-UPN 33, 16550 NW 52nd Ave., Miami, FL 33014. EOE

MAINTENANCE TECHNICIAN Requires self starter having experience with Beta, VPR-3, PC's and other studio equipment maintenance. Experience with microwave, satellite, VHF & UHF transmitters, and FCC General Class license preferred. Contact Marty Peshka, Ass't Chief Engineer - Maintenance. WTNH-TV, 8 Elm Street, New Haven, CT 06510, or call (203) 784-8841. EOE

HANDS ON CHIEF ENGINEER OPERATOR for small market satellite television station. At least five years engineering management and budgetary experience in television. Thorough knowledge of analog, digital, transmitter, microwave operations, maintenance, studio operation and FCC regulations. Computer literacy a must. Send resume to: Dorrie Faubus, Station Manager, KOBR-TV, 124 E. 4th Street, Roswell, NM 88201. EOE/MF

Our CHIEF ENGINEER has retired. Public station WDCN-TV has an immediate opening for a highly-qualified individual to guide us into the digital age. Good benefits, modern facility. For information, contact WDCN, P.O. Box 120609, Nashville, TN 37212. (615) 259-9325. EEO/AA Employer.

TELEVISION STATION IN LAS VEGAS is accepting applications for Broadcast Engineers. Please mail resumes to: KINC TV-15, Univision, 500 Pilot Rd., Suite D, Las Vegas, NV 89119. Attn: Gabriel Quiroz. Or fax to: (702) 434-0527 Attn: Gabriel Quiroz. Copy of SBE certificate is a plus. FCC license required. 3 years of experience in maintaining UHF transmitters.



MAINTENANCE ENGINEER WBFF-TV and WNUV-TV in Baltimore is expanding its Engineering Department and is seeking an additional broadcast maintenance engineer. Maintenance of small format tape machines a must, as well as knowledge of studio, production and master control equipment. Two years broadcast experience is required. Send resume to: WBFF/WNUV, Engineering Manager, P.O. Box 4800, Baltimore, MD 21211. Equal Opportunity Employer.

CHRISTIAN TELEVISION NETWORK has opening at Corporate Office for Director of Engineering. Position requires experience in Transmitter and RF Systems, Production and Transmission video systems and knowledge of HDTV systems and regulations. Management and organizational skills are necessary. We seek individuals who are goal oriented and self-motivated. If you meet our criteria, please send your resume to: Tri-State Christian TV -Personnel, PO Box 1010, Marion, IL 62959. An Equal Opportunity Employer.

CHIEF ENGINEER Dallas Area Trinity Broadcasting station. Experienced in maintenance of UHF transmitter, studio systems as well as personnel supervision and training. SBE certification a plus. Send resumes to Ben Miller, Mail: P.O. Box C-11949, Santa Ana, CA 92711; E-mail: BMILLER@TBN.ORG; Fax: 714/665-2101. M/F EOE

OPERATING ENGINEER: Prefer minimum of two years experience in television broadcast. Good technical knowledge of basic audio & video & PC computers. Duties will include operation of studio cameras, microwave receive equipment, transmitter remote controls, light equipment maintenance as well as basic computer hardware & software maintenance. !!NO PHONE CALLS!! Resume Chuck Amy, Operating Engineer, KOAT-TV, 3801 Carlisle Blvd. NE, Albuquerque, NM 87107. Drug Free Workplace. *KOAT-TV is an Equal Opportunity Employer*

classified

HELP WANTED

AccuStaff Incorporated, the fourth largest staffing agency in the nation is partnering with Discovery Channel Latin America to hire the following contract positions for Discovery's Latin AmericanTelevision Center in Miami, Florida. Contracted through AccuStaff, employees selected for the listed positions will be working on-site at the Television Center:



LATIN AMERICA/IBERIA

TRANSMISSION ENGINEER: Minimum of 3 years engineering

experience with satellite transmission provider, TV transmission facility, or network control/operations center. Knowledge of video, audio and RF signal parameters and quality control standards required, including maintenance of Satellite Uplink Systems. PC literacy required, experience with digital compression system (Scientific Atlanta Power Vu and/or General Instrument Digicipher preferred). Knowledge of Philips/BTS master control/routing and Louth Automation systems a plus. Spanish and/or Portuguese a plus. 24/7.

MAINTENANCE ENGINEER: Successful candidates will have a primary expertise in either systems, RF, video or audio. Minimum of 3 years maintenance experience including significant experience in a ITU-R 601 digital environment. Ability to diagnose to component level, familiarity with test signals and equipment, analytical software, and computer programming. AA degree in electronics or computer systems required. Military or other significant experience/training can be substituted for degree requirements. SBE certification and FCC general class license strongly preferred. Spanish and/or Portuguese a plus. 24/7.

Send resumes to: AccuStaff Incorporated, 1101 Brickell Ave. Suite 1003, Miami, FL 33131
Fax: 305-381-9588 • email address: paulag@accustaff.com
No calls to Discovery Channel please.

VIDEO REPAIR TECHNICIAN Alpha Video, the leader in digital video solutions, is looking for an experienced repair technician to provide service on professional and consumer VCR's, cameras and monitors. Experience on SVHS and knowledge of digital video equipment required. Send cover letter, resume and salary requirements to: Stan Stanek, Alpha Video, 7711 Computer Avenue, Edina, MN 55435. Fax: 612-896-9899; E-mail: stan@alphavideo.com; Phone: 612-896-9898. EOF.

TELEVISION ENGINEER Northern California broadcasting company is seeking support for its FOX 29, Eureka and FOX 30, Chico stations. Applicants must have experience in repair and maintenance of television transmitter and microwave equipment. Salary plus benefits. Send resume to: Job #4307-BE, P.O. Box 4159, Modesto, CA 95352. EOE

TV BROADCAST MAINTENANCE ENGINEER

WOFL is seeking a full-time TV Broadcast Maintenance Engineer. This position will involve installation and maintenance of all types of audio, video and transmission broadcast equipment with heavy emphasis on transmission equipment. Candidate must have a minimum of three years TV broadcast maintenance experience, including transmission equipment. Knowledge of FCC technical regulations also required. Send resume to: Personnel Manager, 35 Skyline Drive, Lake Mary, FL 32746. Resumes must be received by Dec. 5th, 1997. No phone calls. EOE

WPTD/WPTO seeks broadcast Maintenance Engineer. Install, operate, analog & digital equipment including high power UHF transmitters; satellite, microwave & fiber interconnection systems; videotape machines, and master control switchers. Send resume to GDPT, 110 S. Jefferson St., Dayton, OH 45402-2415. FAX (937) 220-1642.

DIRECTOR OF ENGINEERING AND OPERA-

TIONS WHAS11, market leader, is looking for a Director of Engineering/Operations with a minimum of 5 years broadcast and technical operations experience. College degree required. Knowledge of FCC, FAA and EBS regulations is necessary. Strong skills in electronic maintenance, RF systems and experience in labor management necessary. Must have ability to implement new technology, work under deadlines and handle multiple tasks. Candidate must possess outstanding written and verbal communication skills and strong interpersonal skills. Windows '95 and '97 and knowledge of AVID system. Responsibilities include directing and supervising staff in engineering, air operations, information systems, building security and maintenance. Responsible for all long and short range strategic planning and budget preparations. Develops, coordinates and administers all capital expenditures. Oversees technical and operating procedures to troubleshoot problems prior to air. Responsible for preventative maintenance program and repair of all studio equipment. Responsible for other duties as assigned. EOE. Interested candidates forward resume and cover letter to: Cindy Vaughan, Human Resources Manager, HR #721, WHAS11, 520 West Chestnut Street, Louisville, KY 40202

TELEVISION MAINTENANCE ENGINEER Must have experience in repairing and maintaining Broadcast TV equipment of all kinds. Requires 3-5 years extensive equipment maintenance at TV station or broadcast equipment manufacturer. High school diploma or equivalent, and training in electronics required. Submit resume to: KCTV-5 Business Office, P.O. Box 5555, Kansas City, MO 64109. NO PHONE CALLS PLEASE. AN EQUAL OPPORTUNITY EMPLOYER, M/F/D.



TURNER ENTERTAINMENT NETWORKS

ENGINEERS

Turner Production Engineering is looking for talented production engineers with the ability to mix in a dynamic operational environment. Our challenges range the gamut from editing, live studio, audio, and graphics, to virtual studio production and computer generated video using SGI. Experience in these related fields, and a television maintenance background is required. If you're interested in the engineering jobs of tomorrow, today, we're searching for you.

Turner Production
1050 Techwood Drive NW • Atlanta, GA 30318
(404) 885-0802 • (404) 885-4060 FAX
Attn: Kevin Shorter
kevin.shorter@turner.com

TEN is an Equal Opportunity Employer

NETWORK ENGINEER Capitol Networks, Raleigh, North Carolina. Person to be responsible for maintenance of network MCO, satellite delivery system, transmission and backhaul facilities and studio and remote equipment. Individual must have experience in satellite, digital audio, ISDN, T1, microwave, audiovault and studio systems. Excellent communication skills within the company and with affiliates and computer literacy a must. Solid bench skills needed to maintain 15 station newsroom, 5 studios and remote equipment. Three years commercial radio engineer experience required. SBE certification, FCC general license and college degree is preferred. Qualified applicants can mail a resume to: Capitol Broadcasting Company, Human Resources Department, P.O. Box 12800, Raleigh, North Carolina 27605 or e-mail your resume (ASCII only, no enclosures) emerline@cbc-raleigh.com

A RADIO CHIEF ENGINEER is needed in Waterloo, IA with minimum three years radio broadcast experience in all areas of transmitter and studio facilities. Good communications skills, Computer knowledge, and open to continuing education. SBE certification is a plus. Contact: Gregory A. Dahl, Director of Engineering, Connoisseur Communications, 3901 Brendenwood Road, Rockford, IL 61107. (815) 399-8148 Fax; E-mail: 7441,3272@compuserve.com

DIRECTOR OF ENGINEERING WPWR-TV, Newsweb Broadcasting's UPN affiliate in Chicago, is seeking candidates with an established television engineering and management background. Responsibilities include studio, transmitter, building and information systems planning, implementation and maintenance. Ability to evaluate new technologies essential. ASEE/BSEE and/or SBE certification preferred. Resume and salary history to Bob Brewer, Director of Operations, WPWR-TV, 2151 N. Elston Avenue, Chicago, IL 60614. FAX: 773-276-6477.

ad index

Page Number	Reader Service Number	Advertiser Hotline	Page Number	Reader Service Number	Advertiser Hotline
AntennaConcepts	41	. 916-621-2015	JVC Professional Products 49	18	. 800-JVC-5825
ASC Audio Video Corp	16	. 818-843-7004	Kings Electronics 66	24	914-793-5000
Audio Precision 57	33	. 800-231-7350	Leader Instruments Corp 43	28,29	800-645-5104
BAF Communications Corp 95	62	. 407-324-8250	Leitch Incorporated 94,104	59,3	800-231-9673
BeckAssociates97	100	. 512-388-9777	LEL Computer Systems 87	45	561-347-2242
Best PowerTechnology 53	21	. 800-356-5794	Matthey Electronics Ltd 81	42	914-763-8893
B&H Photo-Video 90-93	54,55	. 800-947-9928	Myat95	63	201-767-5380
Bogen Photo Corp 69	39	. 201-818-9500	NeutrikUSA61	37	908-901-9488
The Broadcast Store98	101	. 818-551-5858	Newtek, Inc 39	25	210-370-8000
The Broadcast Store Inc 94	61	. 818-551-5858	NovaSystems/Videonics 45	30	. 408-866-8300
Broadcasters General Store 68	38	. 352-622-7700	Odetics, Inc	13	. 800-243-2001
Broadcast Software Solutions 95	65	. 800-273-4033	Opamp Labs, Inc 88	48	. 213-934-3566
Burle Industries 71	51	. 717-295-6123	Pacific Computing94	60	. 408-336-8867
Canon USA Broadcast Lens 19	6	. 201-816-2900	Panasonic Broadcast5		. 800-528-8601
ChyronGraphics87	44	. 516-845-2000	Philips Broadcast TV 41	26	. 800-962-4287
Clear-com Intercom Systems 59	35	. 510-527-6666	Play, Inc 7		. 916-631-1865
Conex Electro Systems 88	46	. 360-734-4323	Quantel 11	10	. 203-656-3100
Dielectric 89	49	. 207-655-4555	QuVs65	23	. 913-272-3656
Digital Transport Systems 56	32	. 619-675-1410	Sencore	9	800-SEN-CORE
DNF Industries 94	58	. 818-252-0198	Shively Labs94	57	. 207-647-3327
Duracell USA29	14	. 800-548-5489	Sierra Design Labs31	7	. 702-831-7837
EEV, Inc 63	22	. 914-592-6050	Silicon Graphics 32-33	8	. 800-636-8184
ESE 82	43	. 310-322-2136	Snell & Wilcox Ltd 15-17	5	. 408-260-1000
Fast Forward Video 75	53	800-755-TIME	Sony Electronics 20-21		. 408-955-5493
FiberOptions	17	. 800-342-3748	Synthesys Research Inc	15	. 415-364-1853
General Microwave69	40	. 619-631-8031	Tekniche 51	20	. 201-784-2288
HarrisCorp/BroadcastDiv3	4	. 606-282-4800	TektronixInc/VND 24-25		. 800-998-3588
Henry Engineering95	64	. 818-355-3656	TelecomLatina '9867		. 800-288-8606
H.L. Dalis, Inc94	56	. 718-361-1100	Thomson Broadcast 60	36	. 800-882-1824
Horita 88	47	. 714-489-0240	Videotek, Inc 103	2	. 800-800-5719
kegami Electronics Inc 13	11	. 201-368-9171	Ward-Beck Systems Ltd 42	27	. 416-438-6550
ntertec Publishing 72-73	***************************************	. 800-288-8606	Wheatstone Corporation 2	1	. 315-452-5000
ntraplex, Inc 58	34	. 508-692-9000	Winsted Corporation 50	19	. 800-447-2257
watsu America Inc	12	. 201-935-8580	Zero Stantron 89	50	. 800-821-0019
ampro Antennas, Inc 74	52	. 916-383-1177	360 Systems 55	31	. 818-991-0360

sales offices

WEST Duane Hefner 5236 Colodny Ave., Suite 108 Agoura Hills, CA 91301 (818)707-6476 Fax:(818)707-2313 E-Mail address: dnhefner@worldnet att net

Susan Simon 3046-3 Lakemont Drive San Ramon, CA 94583 (510)735-7616 Fax:(510)735-7626 E-Mail address: ssimon@pacbell.net

Sue Horwitz 809 South Orange Drive Los Angeles, CA 90036 (213)933-9485 Fax: (213) 965-1059 E-Mail address: 76345,2624@compuserve.com EAST Josh Gordon 210 President Street, Suite #4 Brooklyn, NY 11231 (718)802-0488 Fax: (718) 522-4751

EAST/MIDWEST Ioanne Melton 1775 Broadway, Suite 730 New York, NY 10019 (212)641-5270 Fax: (212) 459-0395

INTERNATIONAL Richard Woolley Tony Chapman P.O. Box 250 Banbury, Oxon OX168YJ U.K. +44(0)1295278407 Fax:+44(0)1295278408

IAPAN

Orient Echo, Inc. Mashv Yoshikawa 1101 Grand Maison Shimomiyabi-Cho 2-18 Shinjuku-ku, Tokyo 162, Japan (3)+81 3235-5961 Fax:(3)+813235-5852

CLASSIFIEDADVERTISING OVERLANDPARK,KS Jeff Utter P.O. Box 12901 Overland Park, KS 66282 (800)896-9939 (913)967-1732 Fax: (913) 967-1735

LISTRENTALSERVICES Lori Christie 9800 Metcalf Overland Park, KS 66212-2215 (913)967-1875 Fax:(913)967-1897

BROADCA

EDITORIAL

Brad Dick, Editor Skip Pizzi, Technical Editor Steve Epstein, Technical Editor Dawn Hightower, Senior Associate Editor Deanna Rood, Associate Editor lim Saladin. Associate Edito Jennifer Lowe, Group II Editorial Assistant Tom Cook, Senior Managing Editor Carl Bentz, Directories Manager

ART

Stephanie L. Masterson, Art Director

BUSINESS

Raymond E. Maloney, President Cameron Bishop, Senuar Vice President Dennis Triola, Publisher Enc Proffitt, Marketing Coordinator Kathy Lewis, Advertising Coordinator Annette Hulsey, Classified Advertising Coordinator Doug Coonrod, Corporate Art Director Barbara Kummer, Circulation Director Learn Sandilar, Circulation Manager Customer Service: 913-967-1711 or 800-441-0294

TECHNICAL CONSULTANTS Jerry Whitaker, Contributing Editor Eric Neil Angevine, Broadcast Acrastics John H. Battson, P.E., Antennas/Radiation Dane E. Ericksen, P.E., Systems Design John Kean, Subcarrier Technology Donald L. Markley, Transmission Facilities Harry C. Martin, Legal

MEMBER ORGANIZATIONS

Sustaining Members of:

- Acoustical Society of America
- Society of Broadcast Engineers Society of Motion Picture and TV Engineers Society of Cable & Telecommunications Engineers

Member, American Business Press



Member, BPA International

Affiliate Member. International Teleproduction Society



BROADCAST ENGINEERING is edited for corporate management, engineers/technicians and other management personnel at commercial and public TV stations, post-production and recording studios, broadcast net-works, cable, telephone and satellite production centers and networks. Qualified persons include consulting engineers and dealer/distributors of broadcast equipment.

SUBSCRIPTIONS: Non-qualified persons may subscribe at the following rates: United States and Canada; one year, \$55.00. Qualified and non-qualified persons in all other countries; one year, \$70.00 (surface mail); \$130.00 (air mail). Subscription information: P.O. Box 12937, Overland Park, KS 66282-2937.

Authorization to photocopy items for internal or personaluse, or the internal or personal use of specific clients, is granted by Intertee Publishing, provided that the base fee of U.S. \$2.25 per copy, plus U.S. \$00.00 per page is paid directly to Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923. The tee code for users of the Transactional Reporting Service is ISSN 0361-0942/1997 \$2.25+00.00. For those organizations that have been granted a photocopy license by CCC, a separate system of payment has been arranged. Prior to photocopying items for classroom use, contact CCC at (508)750-8400. Organizations or individuals with large quantity photocopy or reprint requirements should contact Chene Wood, (913)967-7212. Microfilm copies of Broadcast Engineering magazine are available by calling or writing UMI, 300 North Zeeb Rd., P.O. Box 1346, Ann Arbor, MI 48106-1346. Phone: (313)761-4700 or (800)521-0600,

©1997 by Intertec Publishing All rights reserved.



BROADCAST ENGINEERING (ISSN 0007-1994) is published monthly (except semi-monthly in July and December) and mailed free to qualified persons by Intertec Publishing, 9800 Metcalf, Overland Park, KS 66212-2215. Periodicals postage paid at Shawnee Mission, KS, and additional mailing offices. Canada Post International Publications Mail (Canadian Distribution) Sales Agreement No. 0956295. POSTMASTER: Send address changes to Broadcast Engineering, P.O. Box 12902, Overland Park, KS 66282-2902. CORRESPONDENCE: Editorial and Advertising: 9800 Metcalf, Overland Park, KS 66212-2215. Phone: 913-341-1300; Edit. fax: 913-967-1905. Advert. fax: 913-967-1904. © 1997 by Intertec Publishing. All rights reserved.

digital basics

MPEG-2 comes of age

o me, the most significant thing that emerged from the IBC convention in Amsterdam was entirely expected, but welcome. C-Cube gave the first public demonstration of one of its DVx chips simultaneously decoding two MPEG-2 streams. This is probably one of the last developments needed for MPEG-2-based nonlinear editing systems. The result is likely to be major



Paul McGoldrick

improvements in picture quality, higher compression ratios and improved end-to-end interoperability, compared to JPEG systems.

The flexible DVx architecture is based on a 32-bit RISC processor extended for MPEG's compression-specific instructions. Encoding and decoding can be 4:2:2 or 4:2:0, and an adaptive field/frame algorithm allows for either field-or frame-type data. From a professional/broadcasting viewpoint, a single chip

that decodes two streams is a major breakthrough. Although the more important chip in the DVx family may be the one with an encoder and decoder on-board and both are real-time (at least within the limits of acceptability of the phrase!). The choice of Motion-JPEG in current non-linear editing systems is almost entirely driven by the availability of single-chip codecs. Having the same functionality in MPEG-2 is an essential part of a switch in standards. Of course, if there was to be a chip with two streams of encoding and decoding on board . . .

What will happen with existing streams using M-JPEG and the DV (DVS) standards of DV consumer (4:1:1, 25Mb/s) and DV prosumer (4:2:2, 50Mb/s)? Clearly, technology decisions and market decisions do not necessarily track well. With the higher compression rates — saving valuable storage space — and better picture quality, MPEG-2 systems should, if the prices are comparable, be the no-contest victors. In practice, the market forces associated with consumer-type standards are too intensive and too complicated to be called by average humans. It was staggering to read that after the debacles associated with the next generation of DVD, there is now a market alignment (i.e., war) set up for the next generation of audio compact discs. One side is the familiar Philips/Sony party and they are against everyone else.

The M-JPEG/DV systems will be usable with the MPEG systems as connection between the existing systems, and a transcoder can easily be accomplished on

a Firewire (IEEE 1394) system. Unfortunately, this method would always involve decoding the M-JPEG/DV signals and re-encoding in MPEG.

Non-editing uses

The importance of these and future products are not limited to broadcast. Doors are opening into other areas. Take the case of recordable DVD. With encoders costing upward of \$20,000, it is unlikely that the average household would have a recordable DVD. The average ratio of the number of MPEG-2 decoders to encoders sold is probably on the order of 10,000 to one, and that is before real adoption of the standard in the home. It has to be expected that, with the advent of the codec chip and with the inevitable price reductions that result from volume, the first mass-market implementation will be in high-end PCs. It should take only a couple of years for the usual trickle-down through medium- to low-cost PCs to take place. By the turn of the century, every machine will likely be fitted with an MPEG-2 codec. The multiple-to-one ratio of MPEG-2 decoders to encoders is going to be quickly replaced by a one-to-one ratio.

Even more than recordable DVD, and the authoring that goes with it (even I might be tempted), is the fact that we have reached the point that consumer digital VCRs and disc-based camcorders are really rather close. The quality of these devices is going to be limited only by the lens/microphone system and any deliberate degradation that might be introduced, allowing for future "improvements." In some cases, the acquisition of signals is going to be dramatically different, too: Texas Instruments and Motorola have made announcements that turn our current CCD detection systems on their heads. How professional the all-CMOS sensor from TI can be, for example, is not yet known, but the integration possibilities are staggering.

Paul McGoldrick is an industry consultant based on the West Coast.

A blatant plug

If you haven't made your reservations to Chicago's O'Hare Airport, for Digital Television 97 on Dec. 3, your air fare is getting more expensive by the hour. Broadcast Engineering editors, people like me and some well-known people are going to present two-and-half days of digital video talk that will make you turn all sorts of colors. You will be more educated, less confused and better able to face the FCC timetables from hell; but anymore of that might give you a clue about what I'll be talking about. Check out the program at www.technicalpress.com for more info.

Clearly a Winner!



PATENT PENDING

The VTM-200 features high-resolution images at a winning price!

The award-winning VTM-200 Multi-Format On-Screen Monitor combines crisp waveform, vector, audio, and picture displays on one low-cost SVGA monitor. This ingenious package allows each high-resolution quadrant to be expanded to full-screen.

The VTM-200 accepts two analog composite (NTSC or PAL) and two 601 serial digital (525 or 625) video inputs. With four AES stereo pairs and four analog stereo pairs, the versatile audio option displays levels and phase differences. The audio bar-graph has a

wide dynamic range and user-selectable resolution and ballistics.

A unique ZOOM feature allows ultraaccurate set up and measurement of black, white, and audio reference levels. Whether your facility is NTSC, PAL, multi-format, serial digital, or in transition, the VTM-200 is clearly the winning choice for all your on-screen test and measurement needs.

Call today to find out more about this and other winning next-generation solutions from Videotek.

Premium Quality, Intelligent Design, Smart Price...That's Videotek.



Five Year Warranty ISO-9001 Certified

Circle (2) on Free Info Card

A Digital System Integration Product

243 Shoemaker Road, Pottstown, PA 19464 Toll Free: (800) 800-5719 (610) 327-2292 Fax: (610) 327-9295 Visit us on the Worldwide Web: www.videotek.com

Powerful

Serial Digital Leitch Xpress
12x1 Monitoring Router Has Electrifying
Features At A Shocking Price



- 12x1 serial video and AES or analog stereo audio in 1RU
- 4 reclocked serial video outputs eliminate need for external distribution
- Built-in video D-to-A provides RGB and NTSC/PAL outputs
- Built-in audio D-to-A provides analog stereo audio outputs (AES models only)
- Local or remote, audio follow-video or breakaway control panels
- RS232/422 serial control with Leitch and GVG TEN-XL* protocol compatibility
- Built-in GPI inputs with selectable joystick override operation

Are you energized? Call Leitch!



http://www.leitch.com

U.S.A. (800) 231-9673 Fax: (757) 548-4088 Canada (800) 387-0233 Fax: (416) 445-0595

Circle (3) on Free Info Card

*TEN-XL is a Grass Valley Group® product.