

Broadcast ENGINEERING

THE JOURNAL OF DIGITAL TELEVISION™


REMOTE BROADCASTING

- Digital links for sat trucks
- Building remote trucks
- A history of remote broadcasting



The New *TV-1000* Audio Console

LIVE TV — The Way It Has to Be

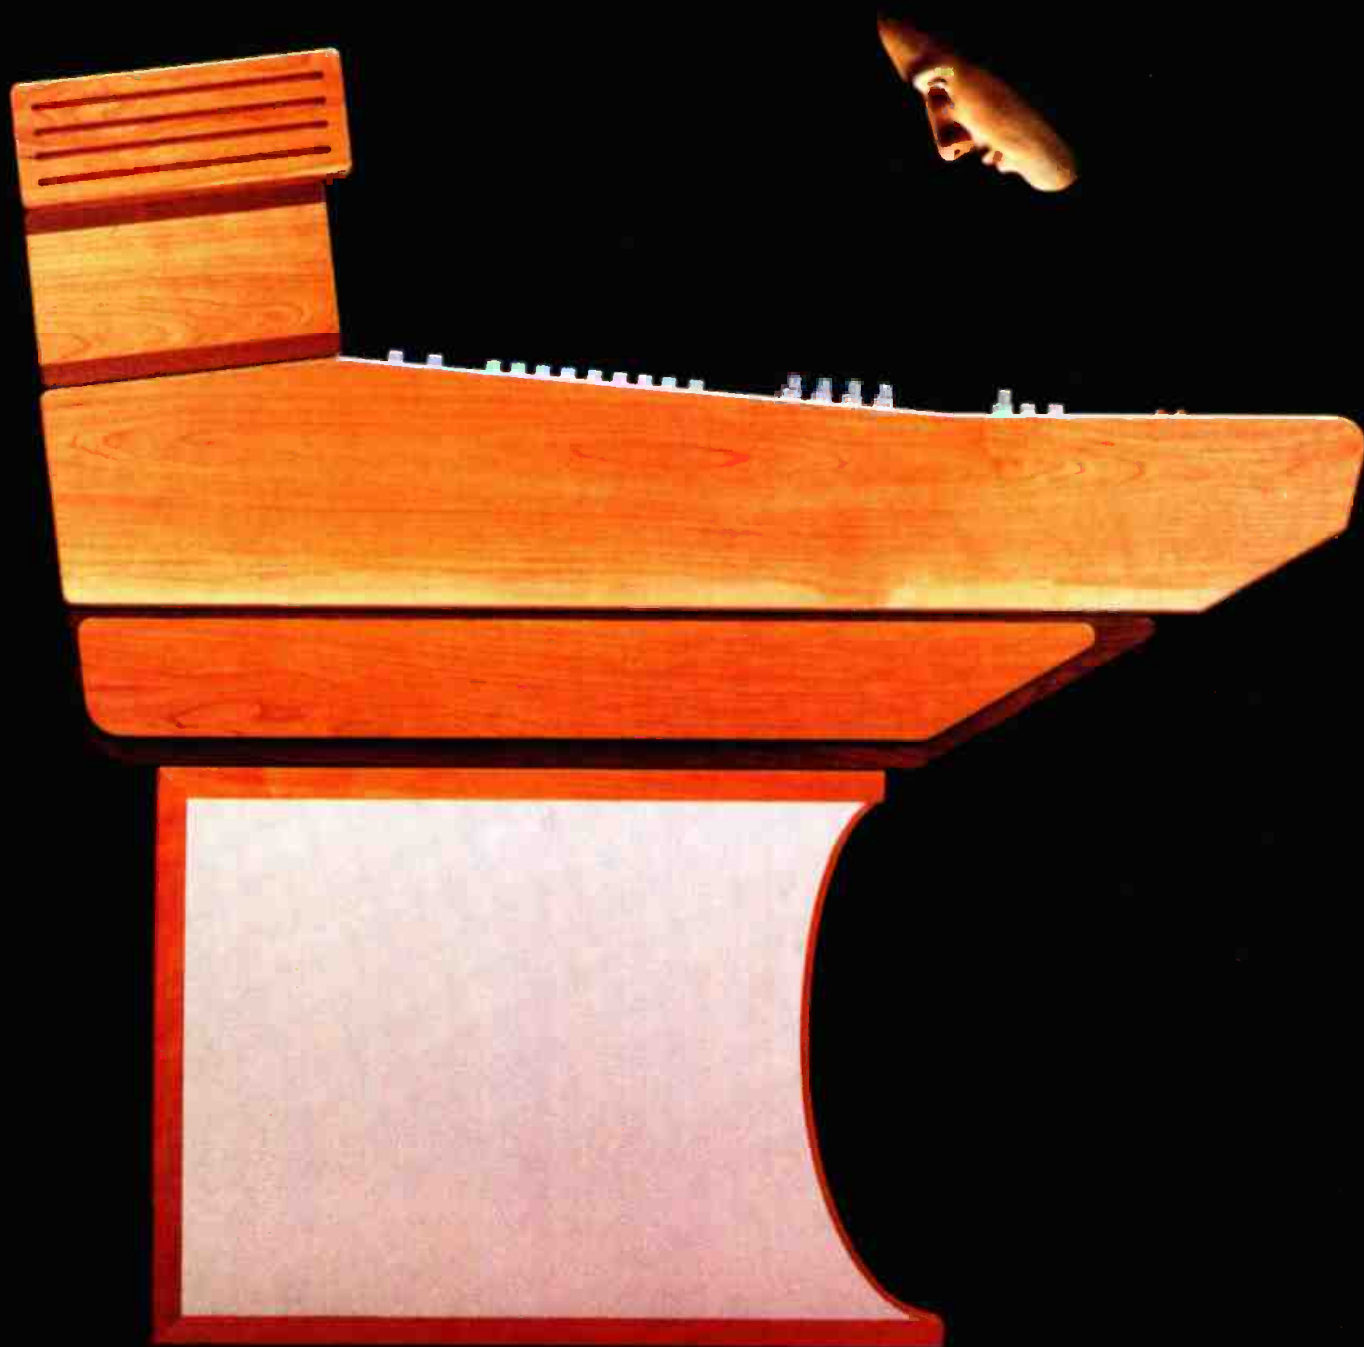

315-452-5000

 Wheatstone® Corporation

Circle (1) on Free Info Card

www.americanradiohistory.com

MOBILE NEWS GATHERING SYSTEMS



“In a town where hot news is continuous, we rely on Harris for non-stop, ultra-reliable ENG and SNG systems.”

Mark Olingy, Director of Engineering/Operations WJLA-TV, Washington D.C.



When covering the news is a relentless uphill battle, your ENG/SNG vehicles must be constantly up to the challenge. That's why WJLA in Washington D.C. relies on Harris S-23 and M-11 vehicles to get crews and equipment on the scene and on the air, on time, every time.

WJLA's Mark Olingy explains: "Our Harris trucks give us the perfect balance between safety, value and rapid-response performance. From narrow backstreet crime scenes to news on the Hill, they've proven themselves time and time again. And from day

one, when they customized our first truck to our exact specs, Harris people have given us great support."

From unrestricted customization, to common sense solutions like our award-winning engine-driven ac generators, Harris ENG/SNG vehicles can be everything you need in a mobile system. Our full-time staff provides unmatched experience in every discipline, including electrical, mechanical, RF and systems engineering. And we offer the broadest selection of electronic equipment, backed by the industry's finest

warranty and 24-hour support, worldwide.

To find out more about ENG/SNG systems that can take the heat in the hottest news towns, contact Harris.

HARRIS CORPORATION BROADCAST DIVISION

7920 Kentucky Drive
Florence, KY 41042 USA
TEL: +1 606 282-4800
FAX: +1 606 283-2818



A new world of broadcast solutions


Systems: Electronic News Gathering -- Flyaway Satellite -- Mobile Production -- Radio Studio -- Satellite News Gathering --
Satellite Uplink -- Television Production -- Television Transmission -- Terrestrial Microwave

Circle (4) on Free Info Card

©1997 Harris Corp.

www.americanradiohistory.com

IN THIS ISSUE

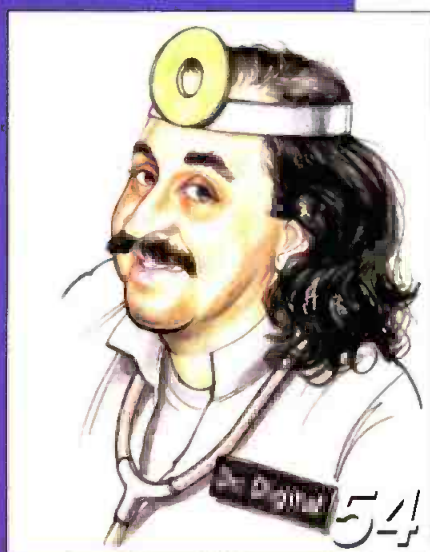

Features

78 Digital links for SAT trucks

By Peter Ludé

Compared to wideband devices of yesteryear, new narrowband and compressed equipment provide higher-quality video and audio.

86 A history of remote broadcasting

By Jim Boston

As we begin the next 50 years of remote TV coverage, it's time to look back to where remotes have been and where they are today.

82 BET builds new OBV

By Steven Lewis

The BET TV network brings the show to the road with a new mobile unit and gives us a behind-the-scenes look.

Beyond the Headlines

NEWS

- 14 Plans hinted at SMPTE meeting
- 14 The scramble for channels
- 16 Mt. Sutro project
- 16 DTV in the desert
- 21 The eye of the beholder
- 24 AvidNews shipping
- 24 A marriage of the Titans
- 26 Tool, toy or what?
- 26 If this is Secaucus, it must be Panasonic
- 30 DTV '97 a success

FCC UPDATE

- 30 Auction rules proposed

DTV UPDATE

- 34 Facing reality

EXPERT'S CORNER

- 36 Compression headaches

VENDOR VIEWS

- 42 Tiernan and Philips respond

Digital Handbook

TRANSITION TO DIGITAL

- 46 The CCIR-601 component digital standard

COMPUTERS AND NETWORKS

- 52 Networking basics

ASK DR. DIGITAL

- 54 A53 meltdown
- 56 Capstan capers

(Continued on page 8)

The true measure of
a GREAT FORMAT is
 how far it can go.

AJ-PD900W
 2/3" 525
 Progressive Camcorder

AJ-D900W
 2/3" Camcorder
 16x9/4x3

AJ-D950
 Studio VTR 525
 Progressive-(Option)

AJ-PD950
 525/625
 Switchable Studio VTR

DVCPRO 50

The 4:2:2, 50Mbps, 16:9, 525p solution.

The DVCPRO format has already proven itself the overwhelming favorite for tens of thousands of video users making the transition to digital. Recognizing the inherent advantages of DVCPRO, it was only a matter of time before video professionals requiring higher resolution and extended definition demanded a DVCPRO solution of their own. DVCPRO50 joins DVCPRO to add a compatible, robust 4:2:2 post-production extension to the world's most cost effective digital video format. DVCPRO50 offers a modest 3.3:1 compression ratio and a 50Mbps



AJ-D90 Dockable

transfer rate to allow almost infinite generational transparency. DVCPRO50 uses the "frame bound" DV core technology to assure compatible playback of DVCPRO and the seamless, effortless editing users demand. The 4:2:2 signal structure and the provision of SDI studio interface takes DVCPRO50 far beyond news, challenging more expensive 525 compressed digital formats in the edit suite. DVCPRO50 protects your investment by being ready with 525 progressive scan studio decks, camcorders and upgrades for DVCPRO 525 interlace decks. Whether your need is 16:9, higher resolution 4:3,

or 525 progressive DTV; DVCPRO50 offers a complete family of camcorders and VTRs. DVCPRO50: The logical extension to a format that just keeps getting better.

Panasonic
 Broadcast & Digital Systems Company
www.panasonic.com/pbds

ADTV
 ADVANCED DIGITAL TELEVISION & VIDEO

ASSOCIATES LEASING, INC.

Associates Leasing is the preferred source for financing and leasing of Panasonic products. For information, call 1-800-526-8638.

For more information call: 1-800-526-8601
 (Upon request enter product code 01)



62



66



92

ON THE COVER: This month's issue required two covers. The outside photo was first seen on the May 1962 cover of Broadcast Engineering magazine. The accompanying story told readers how stations were using the latest in technology to "get close to the story" in high tech remote vehicles like this 1965 Chevrolet van. The inside, second cover, was supplied by Sony showing the latest in technology housed in the new National Mobile Television truck, DX4. What a difference 33 years makes!

WEB SITE DIRECTORY

www.broadcastengineering.com

Feature Articles

Departments

New Products & Reviews

Classifieds/Jobs

Marketing/Advertising

Reader Resources

- Editorial calendar
- Article archives

Contact the Editors

Questions?

Contact:
Deanna Rood
deanna_rood@intertec.com
913/967-1905 fax

Systems Design & Integration

TRANSMISSION & DISTRIBUTION

- 58 The box we call the DTV exciter

PRODUCTION CLIPS

- 62 Lately in audio post

SYSTEMS DESIGN SHOWCASE

- 66 KCPQ goes all digital
70 Building an edit suite in less than 30 days

New Products & Reviews

APPLIED TECHNOLOGY

- 92 Editable MPEG-2: Today's dynamic video compression format
94 A virtual eject button for virtual tape
96 ASC's RAIDsoft

TECHNOLOGY IN TRANSITION

- 98 New high-tech transmitters

NEW PRODUCTS

- 100 From NLE to HDTV
105 No vaporware: Latest products now shipping

BUSINESS WIRE

- 110 Canon sells to NBC

Departments

- 10 Editorial
12 Reader Feedback
90 Management
114 Classifieds
119 Advertisers' index
120 EOM

FREEZE FRAME

A look at the technology that shaped this industry.


Do you remember?

In the August 1964 issue of *Broadcast Engineering*, the article on WPIX's new remote truck describes a key feature as a rooftop camera platform. How did they get the cameras up there?



Answer: A special built-in crane was used to lift the 65lb. cameras onto the reinforced rooftop platform.

Digital live production. It doesn't get any better than this.

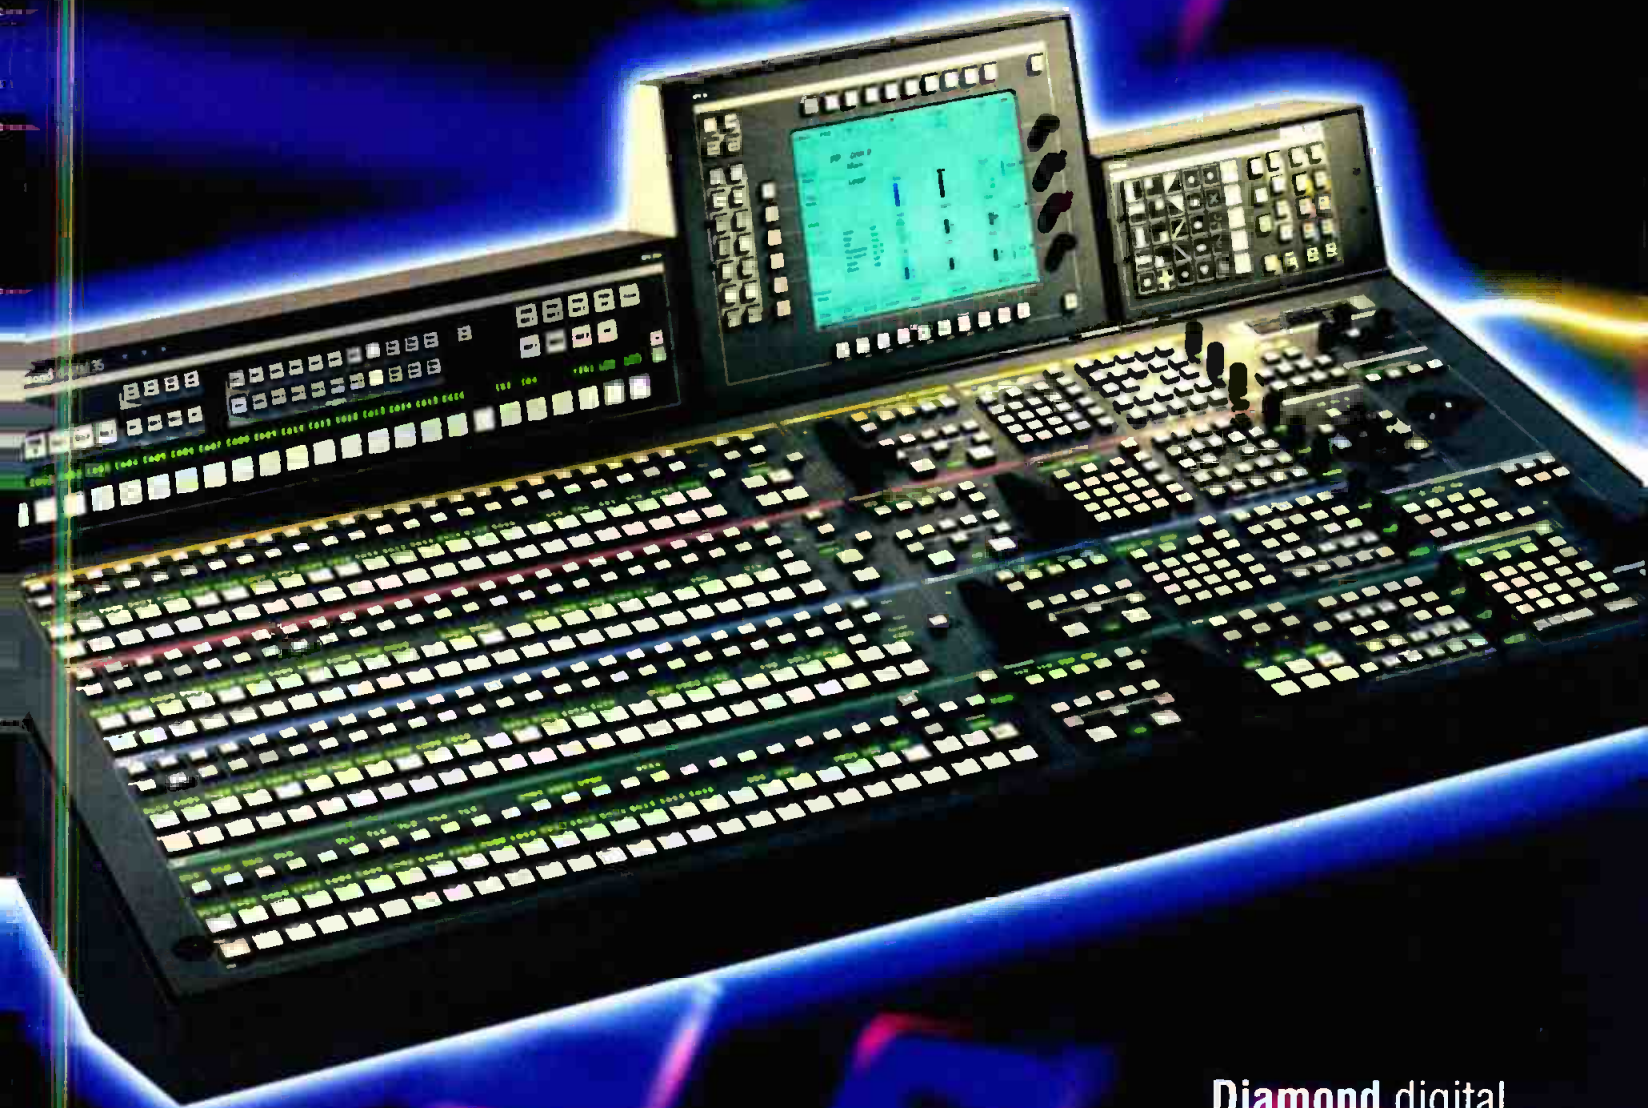

Diamond digital
 **DD35**

DTV
READY

If you're ready to move up to digital live production, move to the new Diamond Digital DD35 switcher from Philips. Loaded with dozens of enhanced features, it makes you and your show look good. The robust DD35 has three M/E banks with advanced program/preset designed in the traditional layout. Plus button-per-function, name-follow-video mnemonics, integrated machine and DVE control, 16:9/4:3 switchable, two key bus rows per M/E, MaKe-

Memo, unlimited application serups, and more. The DD35 live production switcher. Designed by technical directors. Built by Philips. Ready for the future.

For additional information, to request literature, or to have a sales representative contact you, call us at 1-800-962-4287, or e-mail us at info@mail.phbtus.com. Visit our web site at www.philipsbts.com

Circle (16) on Free Info Card



PHILIPS

Let's make things better.

www.americanradiohistory.com

A new year and a new look

January ushers in another year and a new look for *Broadcast Engineering*. Surprised by the cover? We wanted to catch everyone's attention and something historical does that. But, the point is not to emphasize the old, but to remind readers that *BE* goes way back in covering the broadcast and production industries. In fact, 39 years back, and no one has more experience than we do.

We've covered the changes from black-and-white to color, from plumbicon to CCD and transmitter changes from tubes to solid-state, Diacode and klystrons. We've also chronicled the regulatory changes that forced thousands of engineers out of the business and now are bringing them back in droves.

Broadcast Engineering has a proud history of being the engineer's magazine. While other pubs have distanced themselves from the engineering community, we've never apologized for our long-term support

and relationship with engineers. Whether it was through our decade-long support of SBE or with our technical articles, *BE* has always been the must-read magazine for those charged with operating high-tech broadcast and production facilities.

As the industry embarks upon the latest journey, the move to DTV, *BE* is at the forefront. With this issue, *BE* launches a brighter, bolder look, filled with more editorial "meat" than ever before. The design is based on five sections. The sections include: "Beyond the Headlines," "Digital Handbook," "Systems Design & Integration," "New Products & Reviews" and "Departments."

We also provide you with the only feature editorial well in this industry. The feature articles are contained in one section — all without advertising. When talking about commitment to the reader, we set the standard. Want more?

Everyone does news, but only *Broadcast Engineering* provides you with "Beyond the Headlines," a detailed, no-holds-barred, behind-the-scenes look at industry news and technology. We don't

just tell you what happened, we'll tell you why it's important to you.

Got a problem with a piece of gear or with a manufacturer that won't respond? *BE*'s Dr. Digital can help. Send those technical questions and vendor problems to our technical editor (and former TV chief engineer), Steve Epstein. He's already "curing" reader ills as shown on p. 54.

If you're looking for ideas on building that new suite or studio, look no further than the "Systems Design Showcase." A visual feast of high-tech facilities is cram-packed with ideas. An equipment list is included with each feature, so you'll know what others are using to solve problems.

Ever been told, "Sure we can deliver it," only to find that the equipment isn't real? *Broadcast Engineering* now tracks who's shipping what. Don't be fooled by claims of "new and available." Check out "No Vaporware" in the New Products section. There you'll find the latest list of products and services that are real — and shipping today.

Finally, and something of which we're very proud, *BE* webmaster Deanna Rood, has produced the hottest and most useful broadcast web site around. Packed with current *BE* articles and a developing base of archival material, make sure to bookmark www.broadcastengineering.com on your browser.

We've worked hard to reinvent this classic. After 39 years, it's hard to top what's already best. Let us know what you think.



Brad Dick

Brad Dick, editor

direct: brad_dick@compuserve.com
website: www.broadcastengineering.com

TrinityTM

The Golden Age of Television is Back

The One Box That Changes Everything

It took eight years to create. It's driven by 22 radically advanced custom chips and one million lines of hand-coded software. It's the stunning new technology everyone's whispering about. There's never been anything like it: all real-time, all D1 digital, all perfect network-level broadcast quality. A lot of people didn't think it was possible. They were wrong.

MADE IN U.S.A.

RANCHO CORDOVA, CALIFORNIA

TRINITY IS THE FUTURE OF TELEVISION AND A TRADEMARK OF PLAY INCORPORATED. PATENTS PENDING. COPYRIGHT © 1997

- 8 Input Live Production Switcher
- Real-Time 3D Digital Video Warp Effects
- On-Line Non-Linear/Linear Editor
- Live 4ns Character Generator
- Dual Channel D1 Still Store
- Two Time Base Correctors
- Real-Time Animated Paint and Compositing

Experience Trinity Now
at your

Local Dealer



PLAY
INCORPORATED

800-306-PLAY www.play.com

YOUR SECRET NUMBER IS: 49-002-0

In response to the October Editorial, "Predictably Unreliable"

Dear Brad:

Hey, when you use your "trusty dusty" DOS computer, do you usually open programs and then just shut the machine off right in the middle of the program? Or, do you exit the program and return to the "C:\>" prompt before turning off the system?

There is a wonderful book called "Welcome to Windows 95" that has helpful information on how to shut down your computer. I have three laptops and four desktops running WIN95 and NT and never, NEVER had one crash. You don't know what you're missing.

M. CHANEZ
KOSA-TV

Mr. Chanez:

Thanks for the report on how well WIN95 works for you. Glad you haven't had any start-up problems. No one else I've talked to has been so lucky. What is the secret — Texas weather?

Brad Dick

In response to the October Digital Basics "A TV Station for Less Than \$150?"

Gee, Mr. McGoldrick, maybe you should investigate the items before you make strawman arguments to obliterate them. The Wireless Video Sender is analog not digital. But, we hams have been using them for links, up to 20 miles, with perfect pictures/sound using external antennas. With a simple modification and the appropriate FCC waiver, they can be used for short-haul ENG links and free up our crowded 2/2.5GHz band channels for

more distant signals. And, guess what? The signal quality difference between the \$122 marvel and my \$35,000 ENG link, while measurable on a scope, is invisible to the eye.

HENRY RUH
KB9FO,
PUBLISHER,
AMATEUR TELEVISION MAGAZINE



Grannies in Europe in response to the May Editorial "Granny Factor"

Hi Mr. Editor:

We, too, have Grannies in Europe. In 1985, we switched off our last VHF transmitter in London. It was a 45kW, 406-line, B/W system. The BBC was so embarrassed because the last granny was still watching, well listening, actually. She was virtually blind, so the BBC social club bought her a new 625-line UHF set and sent a man around to install it for her.

To put this into perspective (regarding the U.S. nine-year time frame for DTV implementation), 625-line UHF PAL had 94% population coverage by 1971.

CHEERS,
IAN WHEELER
MSc MIEEE

In response to the September Editorial, "Stupid Rules"

Brad,

As I pondered your comment regarding the ATMs and blind drivers, it dawned on me that my car has a rear seat with a matching window. Therefore, my blind passenger in rear could use the ATM in the drive-in without leaving the vehicle.

SHELDON DAITCH
VOICE OF AMERICA

Voting engineers

Dear Brad,

I only hope that voting engineers read your editorial on stupid rules. Here's another example of our government's attempt to legislate their brand of intelligence.

Janet Reno wants to micro-manage Microsoft's marketing of technology. Apparently it is illegal, or "unfair," for Microsoft to give away its Explorer program with Windows '95. By the time that she gets Bill Gates in court, Win '95 and Explorer will both be deader than DOS.

While there is enough hard evidence to warrant an investigation of Microsoft's marketing practices, Ms. Reno can't find fault with the campaign contributions that President Clinton accepted from Indonesian and Chinese sources. She also can't find anything wrong with Al Gore's fund-raising calls from his White House office although there is a law prohibiting the practice. Vice president Gore was correct when he stated, "There is no controlling legal authority!"

Meanwhile, how much of our tax money will Ms. Reno spend chasing computer technology? Fortunately, we don't get all the government we pay for.

SINCERELY,
WALT LOWERY
BROADCAST SALES MANAGER



Put an end to the slow, slow, click, click, slow of editing

Ignoring the benefits of on-line, non-linear editing could be strangling your business. 400 *Editbox*® systems are already working worldwide, and their owners are reaping the rewards of unrivalled editing power, creative freedom and increased profitability. Before your business starts grinding to a halt, take a look at *Editbox*.



Call our 24 hour Editbox Hotline now: 1 800 218 0051 Ext. 759

Quantel Inc., 28 Thorndal Circle, Darien, CT 06820 Tel: +1 203 656 3100 Fax: +1 203 656 3459 <http://www.quantel.com>

Circle (17) on Free Info Card

EDIT BOX

the on-line editor

BY LARRY BLOOMFIELD



Plans hinted at SMPTE meeting

At the SMPTE New York section meeting last month, the subject focused on what the big boys were planning to do with DTV. Those in attendance didn't really hear much of anything new. And, many appeared to be somewhat gun-shy after the recent Congressional inquiries on multicasting vs. HDTV.

Terry Poon of PBS made it clear that the network planned to transmit SDTV multicasting during the day and HDTV at night, with data transmission filling what it calls "opportunistic" bandwidth at any time the network had material to transmit. PBS has gone on record saying it supports flexibility with respect to using the spectrum. The network is the only one, to date, that has published a clear-cut plan on its intentions. For more information on PBS's plans, visit its web page at www.pbs.org.

The other participants and attendees I spoke to, Frank Garaty of Tribune's

WPIX and Tom Hankinson of ABC's WPVI, indicated that their companies were taking a wait-and-see attitude while business plans can be developed. Bob Ross of CBS said his company has no plans for multichannel. Ross did say that: "...common sense tells you I'm going to buy an encoder that has card slots to be flexible for whatever happens, including multichannel." He also said that another problem is the lack of multiflexible encoders that can handle multicast and HDTV. Ross indicated that when the encoder problem was resolved, life would be much easier for everyone.

What could develop into a major, non-technical problem for the networks centers on the unions. If an NTSC show is simulcast with HDTV, many problems go away, but if there is any sort of time separation or delay in broadcasting the same show, union considerations may become, as one participant

told me, "a big issue."

Sinclair's plans


Although not at the meeting, Nat Ostroff of Sinclair Broadcast Group spoke on his company's DTV plans. First, Ostroff sees DTV as an opportunity to expand services in many markets. He said that from seven to nine multicast channels are feasible given a 6MHz channel allocation. When speaking with most of the directors of engineering on this subject, it became apparent that SDTV multicasting is familiar ground to broadcasters where HDTV is going to require not only a lot of new equipment, but a whole new approach. The biggest drawback with HDTV, according to Ostroff, is not technical, but business. No one's got a business model for HDTV. Once that is successfully developed, he says Sinclair will provide the service.

Ostroff also indicated that HDTV would be a hard-sell item. History shows that viewers often have no problem watching programs recorded at superslow speed so they could get eight hours on a T-120 cassette. He said it will be difficult to convince the average viewer to spend thousands of dollars to get HDTV. Added to this, in our discussion, he stated that recent demonstrations of 480P next to a 1,080I on a pair of 36-inch TV sets were hard to tell apart. ■

FRAME GRAB

A look at the issues driving today's technology.

When do stations expect to be transmitting DTV?

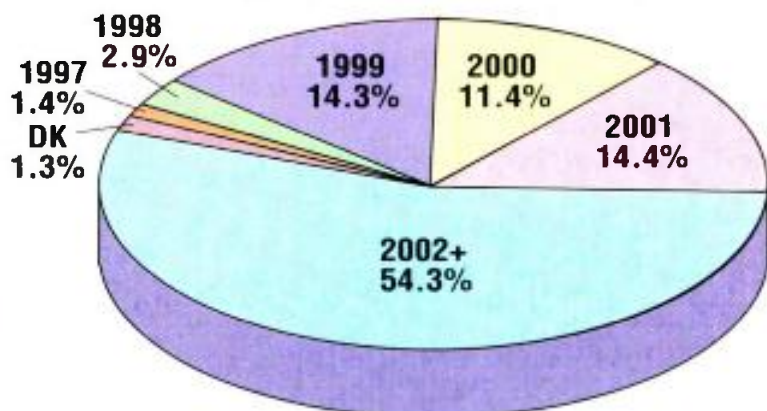

Source: SCRI International. (www.scri.com; e-mail: scri@scri.com)

The scramble for channels

The biggest fly in the ointment in getting DTV on the air is the request to the FCC for reconsideration of channel assignments. The NAB, the Association of Local Television Sta-

PROFILES

In Excellence

Delivering video and audio quality that was "much better than microwave" for a period of four months, Canobeam II, Canon's Optical Wireless Broadcast Transmission System, operated "flawlessly" during the hostage standoff in Peru—that according to a news article that quoted CBS Technical Supervisor, Dallas Bureau, Perry Jones.

Jones, who helped set-up the system in Peru, when local authorities prohibited the laying of fiber-optic cable for security reasons, described the Canobeam as "a great technology that delivers superb video and audio quality, and is much better, and much cleaner, than microwave transmission. With the Canobeam you do not experience any 'breathing of chroma', 'hashing of video, or 'audio noise' like you would with microwave. You get just nice clean audio and video with Canobeam."



CANOBEAM II WIRELESS BROADCASTING.

**"Canobeam II
'Flawless' For
CBS During
Peruvian Crisis"**

For additional information on Canobeam II, or the complete report on this event, call 1-800-321-4388.

Canon
The Number One Lens

Circle (18) on Free Info Card

tions (ALTV) and the Association for Maximum Service Television, Inc. (MSTV) have submitted comments to the commission identifying two systemic problems in the table of DTV assignments. The group has proposed a scheme that will enable many DTV stations to increase power under certain interference criteria.

The biggest concern is that changing the allocation of any DTV station in the more spectrum-congested areas of the country will impact the remainder of the stations in that area. The MSTV identifies two sets of problems — “the high incidence of interference in the Northwest, Great Lakes and California coastal regions . . .” and the “newly discovered DTV-to-DTV adjacent-channel interference.” MSTV states in its comments to the FCC that “the 357 changes to the DTV Table . . . ameliorate the most egregious interference problems that arise in the three regions . . .” MSTV says that the problems are inseparable and must be addressed together, especially in the congested markets.

MSTV says that with more than 1,600 licenses involved, and the necessary trade-offs being made between coverage and interference, some stations will inevitably feel injured by the changes. MSTV points out that the allocation of 24MHz of spectrum between 746MHz and 806MHz for public safety services does not help the situation, but suggests that their submission to remedy these problems does not disturb that process. Keep in mind that there are nearly 100 analog TV stations still using channels 60-69, not to mention the multiplicity of translators serving a good part of America’s heartland on those channels, as well.

The ALTV has addressed the concerns of many UHF broadcasters who claim that there is too great a difference in assigned power levels between U-to-U stations on one hand and the DTV stations of VHF broadcasters assigned UHF-DTV channels on the other hand. Although there is little question that these and other issues need to be addressed, all these requests for reconsideration will likely create further problems in the implementation of DTV markets. ■

Mt. Sutro project

Until a station knows its assigned channel and ERP, it is impossible to buy any RF equipment. An example of this problem is evident at the Mt. Sutro tower project in San Francisco. Gene Zastrow, general manager of Sutro Tower, pointed out that this presents a serious problem to the stations on his tower. In addition to those FCC questions, the EPA and local zoning boards are additional issues broadcasters have to deal with.

The plan for the Sutro complex is to have each of the 10 stations feed their DTV transmitters into one of four combiners. These will, in turn, feed one of the four-panel antennas to be mounted on the side of the 760-foot Kline tower. When the transition to DTV is complete and present NTSC service has been retired, the plan is to move the DTV antennas to the top of the tower to replace the NTSC antennas that currently extend an additional 200 feet up from the top of the tower.

Some work has already been done at Sutro, but until the San Francisco stations have been assigned channels and power levels, they have to wait. Keep in mind that because San Francisco is the fifth largest market, the stations on Mt. Sutro are supposed to be in the first wave of DTV stations. It doesn’t take a rocket scientist to figure out that the FCC’s (in)action and those of the EPA and local zoning boards could delay greatly the implementation of DTV across the country. In the real world, Murphy’s Law will probably play a big role in this novella, if it hasn’t already. ■



DTV in the Desert

HDTV was real at January’s Consumer Electronics Show (CES). And, to further emphasize broadcaster’s support of the format, Harris Broadcast orchestrated a full day of activities to show the consumer industry that broadcasters support the transition to DTV.

At the CES symposium hosted by Harris, the company’s vice president/general manager of the broadcast division, Bruce Allan, released the results of a new Harris survey into broadcasters’ plans to build DTV stations.

According to the survey, 93% of the stations contacted felt they were likely or somewhat likely to convert to DTV within five years. Some 66% said they could afford the conversion, compared with only 42% who felt it was affordable in last year’s survey. Expressing optimism about DTV’s future, 83% of the stations said they hope the conversion will become a reality, up from 72% last year.

Further support of DTV was shown by broadcasters through the two Las Vegas stations transmitting HDTV signals. KLAS and KLVW provided live, off-air feeds for the many HDTV receivers throughout the exhibit hall.

DirecTV goes HDTV

Even the satellite folks got into the act with DirecTV announcing a cooperative venture with Thomson that will result in two channels of satellite-delivered HDTV programming from DirecTV beginning later this year. Many broadcasters felt this action would further move stations toward an early implementation of DTV.

When combined with the launch of DTV by some broadcasters this year, as many as 30% of U.S. households could shortly have access to digital signals.


Some engineers interviewed at the Harris event felt that support of HDTV by satellite companies could help broad-



SNELL & WILCOX



DTV. ADAPT OR DIE?

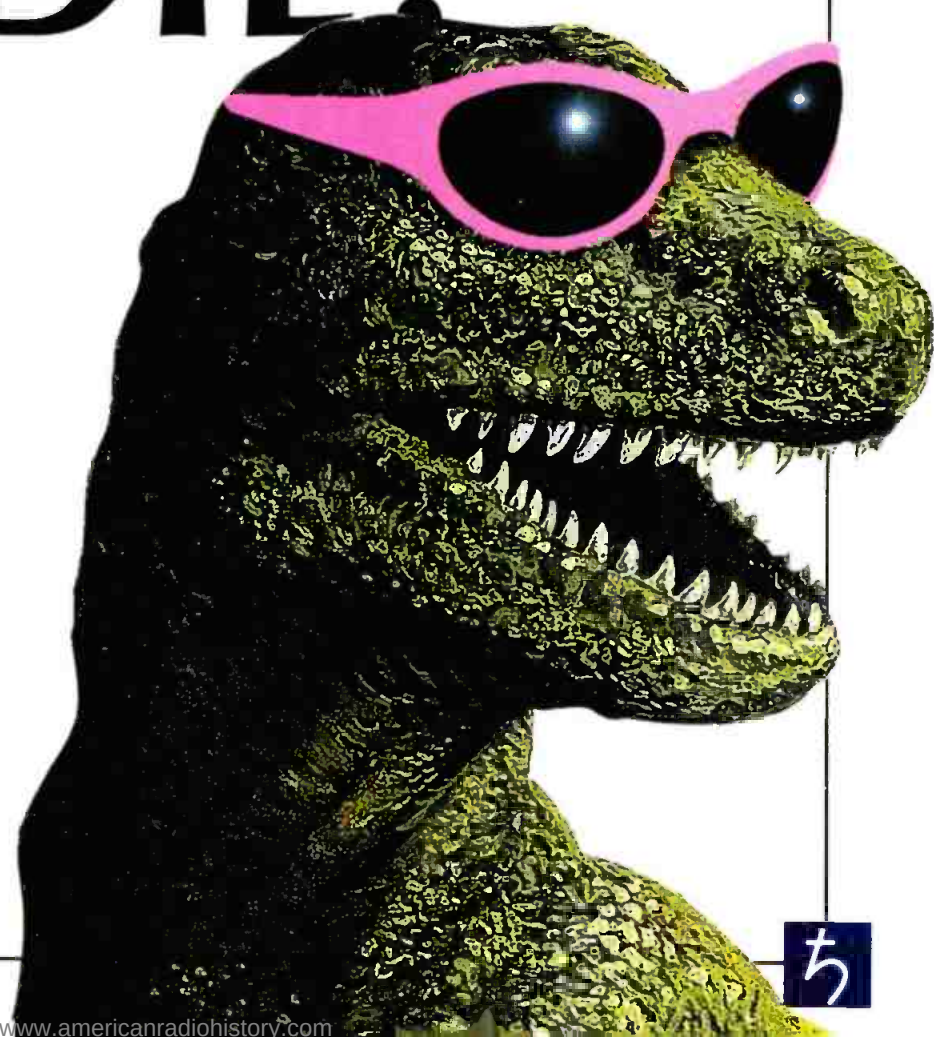

Circle (5) on Free Info Card



www.americanradiohistory.com

**SNELL**

YOUR SURVIVAL

SDTV? HDTV? Both? – Managing the Evolution

How easily can you adapt to the digital television future? Snell & Wilcox has many of the answers you need. Especially on the question of HDTV. After all, we've been developing High Definition technology for the past ten years.

Can I use my existing facility for production and then upconvert to HDTV for transmission and still adhere to the FCC requirements?

Yes. FCC regulations only require the transmission of a digital signal, but don't specify the digital transmission or production format. Standard Definition (SD) formats such as 480i can be upconverted to higher quality formats, and component digital signals from clean sources upconvert fairly well to HDTV. NTSC is not so good because of its limited bandwidth. D-2 and D-3 digital signals are better than analog because of the reduced noise. The ideal pictures for this purpose are those downconverted from HD.


So the best solution of all is to use HDTV cameras for acquisition and downconvert to SDTV for post production prior to up-converting. This also means you get continuing value out of your existing SDTV hardware investment.

Can I downconvert a signal so that I can do local production?

Yes. Studio quality baseband HD feeds just require a suitable downconverter set to the required aspect ratio. If the source is an ATSC MPEG bitstream, it's got to be decoded back to baseband video with the highest possible quality before downconversion.

How do I deal with a

Easy. Compared with clean 601 digital signals, archive material typically suffers from problems such as tape noise, film grain, poor quality transfer, motion weave and sometimes the degradation of old age.

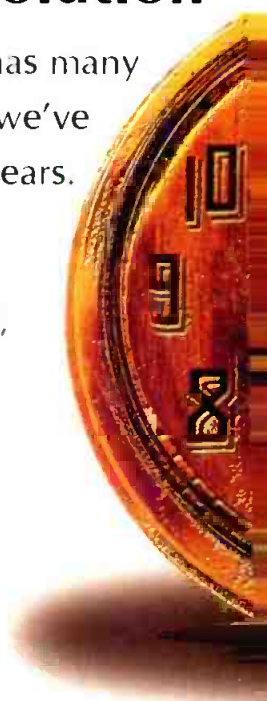

GUIDE TO HDTV



Is it time to transfer my facility to a 601 type production at the very least?

Maybe. 601 isn't HD and will still require upconversion, but the output quality will be much better than upconversion from other sources. If your NTSC quality is good, you could use a high grade decoder and an upconverter to output HDTV in the short term. If it isn't, you should fix it because upconversion reveals poor quality and MPEG encoders don't like noise.



Can I pass through an HDTV signal if I'm not doing any local HD production?


Yes. The HDTV signal you pass through will be MPEG encoded and provided you don't modify it in any way, it's a cinch.

ny archive material?

Careful noise reduction and pre-processing of these SD signals prior to upconversion will tackle each of these problems and enable you to maximise the value of your archives.

What kind of quality can I expect when I upconvert my local production for transmission in HD?


Best results are from a 601 digital source. Then analog component is the next best, finally the least good results come from a composite NTSC source. When you have no choice but to use composite, you will need the best decoder. With less than excellent decoding, residual NTSC color subcarrier can remain in the decoded video signal. This is then treated as video by the MPEG encoder, wasting valuable bandwidth.





THE DEFINITIVE HD RANGE FROM SNELL & WILCOX

Up and downconversion allows existing equipment to complete its life cycle into the HD era.

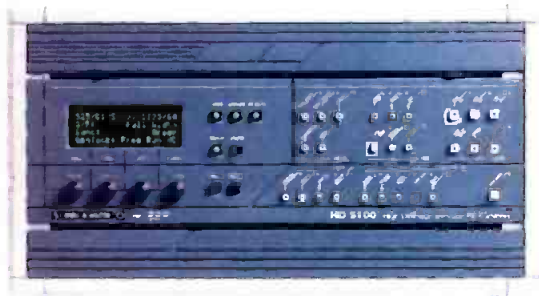

HD5100: HDTV Upconverter

Fully featured provider of high quality upconversion from SD to all current HD formats.

10 bit Transmission/Production



HD2100: HDTV Downconverter

Excellent quality pictures, particularly suitable for dual SD/HD production.

10 bit Transmission/Production



HD50: HDTV Upconverter

Economical analog upconversion. Ideal for monitoring.

8 bit General Purpose



HD3100: HDTV Cross/Downconverter

With PhC motion compensation option for total conversion transparency across field rates. Perfect for international syndication of sports etc.

10 bit Transmission/Production



HD200: Compact HDTV Downconverter

Economical solution for dual format studios.

8 bit General Purpose



HD6000: HDTV Field Rate Converter

Converts both ways between previous 1125 HD formats and US 1080 standard. Enables incorporation of legacy hardware and archive programming.

10 bit Transmission/Production



For more information and product details call us on
408 260 1000 or fax us on 408 260 2800.
e-mail: info@snellusa.com. [www: snellwilcox.com](http://www.snellwilcox.com).

And to see DTV solutions in action visit our booth #9876(LVCC) at NAB '98

Circle (7) on Free Info Card



SNELL & WILCOX



casters by further differentiating the quality differences between off-air and satellite signals and those from cable. There has been surprisingly little public-voiced support of early DTV implementation by the cable MSOs.

The consumer show went all out to show its support for HDTV. With every major TV manufacturer showing HDTV sets in their booths, it wasn't hard to be convinced that not only will HDTV happen, it's going to happen a lot sooner

(and less expensively) than many think.

FCC to announce channels

At the Thursday Harris symposium, FCC commissioner Susan Ness may have let the cat out of the bag when she said that the FCC should have resolved the channel allocation issue by month's end.

She went on to explain that the staff was almost finished with an examination of the petitions for reconsideration. Furthermore, it was her opinion

that the commission would be able to announce the results of that work by the end of January.

This should come as good news (depending on what you're granted) to stations, especially those needing to be in the first wave of DTV stations on the air. Many have complained that without an early 1998 decision on channel allocations, major market stations would be unlikely to meet their promise of being on the air in late '98 and mid '99. ■

The eye of the beholder

I've been inundated with E-mail from several fellow broadcast professionals about claims they've recently heard with respect to certain companies stating they could produce high-definition pictures from standard NTSC sources. One such press release from Faroudja, Inc. announced that it has a "prototype upconverter . . ." that will give "revolutionary delivery of HDTV-quality images from conventional broadcast sources." These broadcasters' concerns were the result of conversations we've had and things written on the subject of bumping NTSC up to HDTV. I had said that it was not possible to deliver the same high-quality 1,080i or 720p pictures, in comparison with what could be the presentation where the source was in a true HDTV format.

To be fair to all concerned, let's look at this in two lights: in the real world and as a purist. We know that the human eye is an amazing thing, but it plays tricks on us and we depend on that to reach our goals. We cease to see individual pictures somewhere above 16 frames per second (fps) and the flicker tends to disappear in the neighborhood of 70fps. We can take three colors — red, blue and green and fool the eye into thinking that there is a full spectrum of colors. No two people see the same thing the same way. For example, group tests of random individuals have demonstrated that it is difficult to distinguish the difference between a good "studio"-like-quality NTSC picture on a 36-inch screen when compared to an HDTV picture on a comparably sized screen. I found that hard to

Switch On

to the new wave of switcher for the new demands of post and broadcast.

The PC-based PVS-2 and PVS-4 compact switchers are loaded with features and can be driven from a familiar format control panel or your own workstation.

Applications include:

TELECINE AND HIGH END GRAPHICS

The PVS-4 is a true 4:4:4 switcher capable of handling both 4:4:4 and 4:2:2 sources.

EDIT SUITES & GRAPHICS

For both M/E and key layering applications, the PVS-2 is ideal for graphics compositing as well as auto conforming.

MASTER CONTROL & PRODUCTION

For applications requiring a compact control panel for preview to air operation, the PVS-2 provides a perfect solution.

Call PSP Digital, the makers of the Alpha switcher range.
To find out more, please call +44 (0) 1635 522534



PSP Digital Limited
6 Vorec Centre, Hambridge Lane,
Newbury, Berkshire RG14 5TN U.K.

Tel: +44 (0) 1635 522534
Fax: +44 (0) 1635 551995
Web: www.psp-digital.co.uk

believe until I had actually seen this demonstration for myself. Most folks familiar with HDTV will say that HDTV really doesn't come into its own unless it is displayed in the larger-screen formats.

Here's where the confusion begins. Anyone claiming to be able to deliver HDTV-quality images from conventional broadcast sources has got to be assuming that the picture is being displayed on a small screen where the differences are not perceptible. The ratio of pixel information when comparing NTSC to HDTV is something in the order of 1:5, with HDTV having five times more information. Therefore, to create an HDTV image from an NTSC source would require that each pixel be used five times (figuratively).

Adolfo Rodriguez of Snell & Wilcox said that his company's upconverter is not meant to be a substitute for high-definition television, but a tool to be used in conjunction with it. "You can improve what you get in upconversion

by cleaning up the NTSC. Remember, upconversion is like an indiscriminate magnifying glass and good composite decoding and noise reduction can do wonders. Also, while upconversion




Snell & Wilcox upconverter.

may not be a substitute for the real thing, it still can deliver an enhanced viewing experience," said Rodriguez.

On the other hand, despite my purist attitudes, I see short-term and long-term uses for such devices. A few stations will be able to make the leap

directly to HDTV production capability, but most will not. In these cases, a device like this would be a beneficial temporary measure. Once widespread HDTV broadcasting is in place, the availability of HD material should be widespread and there should be less of a need for upconversion devices. However, in the short run, any device that can create an HDTV-like image from NTSC source material may be of tremendous benefit. And, the DTV bit-stream won't know the difference. Of huge benefit is that the cost of such a device, when compared to the cost of converting an entire facility from NTSC to HDTV, will be insignificant.

Undoubtedly, more issues like this will crop up. If anyone tells you that they have an upconverter that will convert NTSC into HDTV, remember the laws of physics haven't changed. You still can't get a silk purse out of a sow's ear. ■

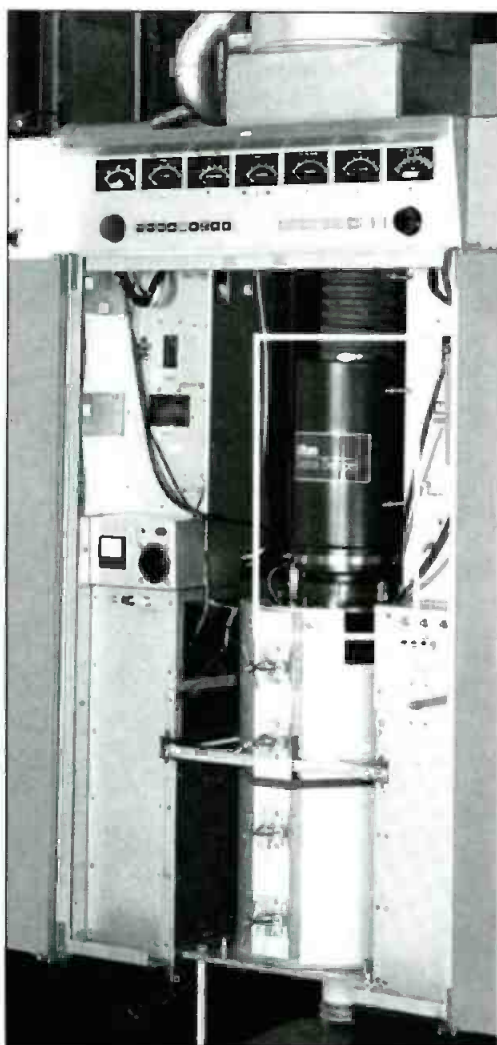

Put us to the test.

Litton Electron Devices brings over forty years of experience in the microwave power device industry to the table when it rebuilds and repairs UHF-TV Klystrons for your business.

Consider these capabilities:

- Complete rebuild or repair to specification standards of Series 89X, 95X, and 755X UHF-TV Klystrons
- Prompt inspection and return on Evaluation Report
- Quick turnaround on repairs
- ACE gun provided on all rebuilds
- Tubes fully tested to assure performance
- Shipment from stock in many cases
- Tubes tuned to specific channel frequency
- New tube warranty
- Cash or credit for DUDS
- Technical back-up and service
- UHF-TV Hotline for pricing, stock availability, DUD purchase, technical service, data sheets, and tube information
- Can provide the L-4945A deuterium filled, double gap ceramic crowbar thyratron (equivalent to the CX-2708)

Call our UHF-TV Hotline at 800-861-1UHF (1843) or fax us at 717-326-2903.

Litton

Electron Devices

1035 Westminster Drive • Williamsport, PA 17701 • Web site: www.littoneed.com




Circle (9) on Free Info Card

LEARN TO SHARE...



ALL OVER AGAIN

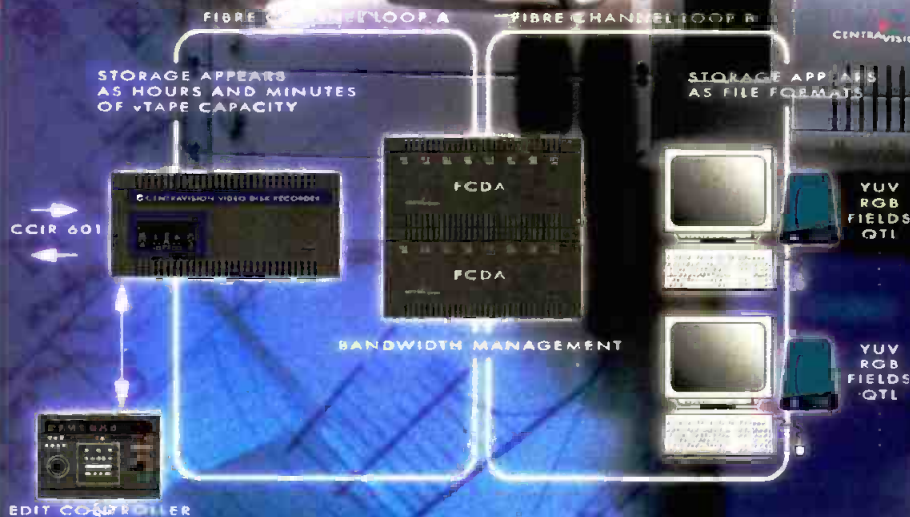

CENTRAVISION SHARING

In more innocent times, we discovered the joy of sharing an experience. We found out that accomplishment and creativity flourished more fully when we cooperated and worked in teams. It's time to get back to basics.

The CentraVision Fibre Channel Network and Storage System is founded on the fundamental lesson of sharing. Now, multiple workstations in your facility can all access the same pool of source material, even work on the same projects at the same time. And the CentraVision VDR lets you bridge the world of the on-line suite with the non-linear, easily transferring source material between the two. It's also the only VDR that grows up with you, providing expandable storage that's shared on the CentraVision network.

It's a whole new way of working together. Just like it used to be.

Call 800-556-0222 or 702-851-9393 and visit our website at www.mountaingate.com.

SHARED MEDIA SOLUTIONS

© 1997 MountainGate Data Systems, Inc. CentraVision and CentraVision VDR are trademarks of MountainGate Data Systems, Inc. The candy was taken during the making of this ad.

 **MountainGate**
A Lockheed Martin Company

Circle (10) on Free Info Card

www.americanradiohistory.com

Matthey ELECTRONICS

Available from:
Television Equipment Associates, Inc.
Bill Pegler.
PO Box 499
South Salem, N.Y. 105900499
Tel. 914-763-8893 Fax. 914-763-9158



VIDEO A-D/D-A CONVERTERS

DISTRIBUTION AMPLIFIERS

AUDIO MUX/DEMUXES

PAL/NTSC DECODERS

FIBRE OPTIC LINKS


SDI ROUTERS

Circle (11) on Free Info Card

AvidNews shipping

Joe Snelson, director of engineering for the Meredith Broadcasting Group and chief engineer at KCTV in Kansas City, said he was buying the AvidNews newsroom computer system in his efforts to upgrade Meredith's news operation in Kansas City.

"It will fit nicely into our existing plant, increasing and upgrading our capabilities without a major

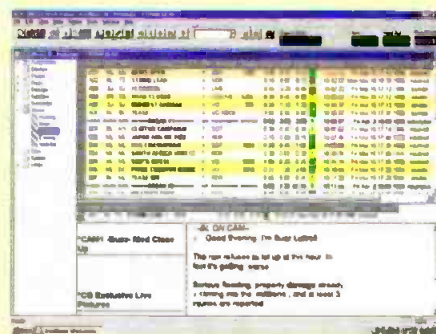

interruption to our operation. The plan is to have it work with five of our nine NewsCutters," Snelson said. The key advantages of the AvidNews PC-based system is that it enables journalists, editors and producers to access video and share scripts and rundowns, making news production a faster, more efficient process without sacrificing creativity.

The FOX O&O KRIV-TV in Houston has also ordered an AvidNews system for its newsroom, which will complement the station's recently completed studios.

Avid has announced the sale of a 171-seat system for WSB-TV, Atlanta's ABC-affiliate. It's all part of the station's new, all-digital studio. Mike Howey, WSB's director of engineering said that the new AvidNews would seamlessly integrate with his existing system, saving him money and expensive training time.

The new system will be used with a Sony news server. Avid software will work with the Sony servers to control playback and will integrate Sony's low-resolution desktop video editing on the same AvidNews PC screens.

Other recent Avid sales include the Spanish national broadcaster RTVE in Madrid, Spain and all 22 of the FOX TV stations O&O news operations stations.

A marriage of the Titans

When two big, and I mean big, names in the wonderful world of computers get married, it could only take place in Silicon Valley. Silicon Graphics, Inc. (SGI) has formed an alliance with Microsoft (MS). The companies claim to be "defining the future of graphics," in a project code-named Fahrenheit. The goal of this collaboration is to provide a common set of low- and high-level APIs that integrate the elements of research and development that SGI and MS have individually developed.

The marriage isn't something new. The two companies have worked together in the past to develop OpenGL for Windows NT. Fahrenheit will pave the way for a truly

Instant Replay.[®]

Instant sound effects.

Instant music. Instant fun.



Take it out for a 10 day joy ride.

Instant Replay puts a thousand audio clips right at your fingertips.

You want sound effects? You got 'em! You want music and song? It's yours...as much as you want. In fact, Instant Replay holds up to 24 hours of your greatest material.

With everything on-line, titled, timed and ready to play,

Instant Replay is fast, fun and easy to use.

And with 50 Hot Keys, you're in the driver's seat creatively.

So, take us up on our offer to go out for a joy ride with Instant Replay. It's on us.

We're that sure that after you test drive it, you'll want to park it at your place.

Drive it Hard!



Attention call letter stations.* You're only a phone call away from a free 10-day Test Drive.

So try it out. We'll understand if you don't give it back.

(818) 991-0360

360 Systems[®]

PROFESSIONAL DIGITAL AUDIO

For more information call (818) 991- 0360 / Fax (818) 991-1360 / www.360systems.com

* Offer good in US and Canada only.

Circle (19) on Free Info Card
www.americanradiohistory.com

A Measurable Difference...



New, innovative products that fit the way you test. Instruments that are specifically designed to give you the answers you need quickly, with easy to use interfaces in rugged designs. Accuracy traceable to NIST and guaranteed through accredited European Competent Bodies.

We're continuing to expand our range of offerings so that you can depend on us to be your one-stop-shop for products, information and support for your toughest problems. From "DC to Daylight", Holaday provides meters, monitors, solutions and PPE for accurate evaluation of, and protection from, EMF exposure and emissions.

Holaday

EMF Performance Tools

Eden Prairie, Minnesota 55344
Telephone: 612-934-4920
Facsimile: 612-934-3604
E-mail: holaday@holadayinc.com
Web page: www.holadayinc.com

scalable computer graphics software framework. This is something the industry has wanted for some time.

On the other side of this coin, the Fahrenheit technologies will be available on current and future Silicon Graphics hardware systems. Until Fahrenheit can be delivered, it is expected

that SGI and MS will work together to support the development of graphics applications for professionals and consumers through existing APIs. For further information about the Fahrenheit APIs, check out the SGI web site at www.sgi.com/fahrenheit or the MS web site at www.microsoft.com/directx. ■

Tool, toy or what?


One of the areas authorized by the new TV standards for digital delivery is data. Intel is planning to develop a link between television and the PC. The company plans to use an experimental FCC license to transmit digital material in concert with several PBS stations. As they say, "If PBS doesn't do it, who will?" An Intel Company spokesperson said that there are a great number of things it wishes to try out including the possibility of 3-D broadcasts and interactive education. To this end, Intel plans to launch several data broadcasting market tests during the first half of this year. In addition to its application to use Channels 6, 12, 28 and 62 in Santa Clara, CA, it would not surprise me if the company did some testing with KQED-TV in San Francisco, KTEH-TV in San Jose and WETA-TV via satellite in Washington, DC. The Intel studies with the digital signals will also permit PBS to check out new uses for its Infinite CD platform, which was co-developed with Intel.

In addition to working with PBS, Intel is also working with Nickelodeon and Lifetime. The technique is called Intericast. With the addition of a \$100 tuner card and a source for Nickelodeon and Lifetime programming, PC users are able to receive TV signals with data embedded in the signals. The signals carry information that Intel says will complement or enhance the video programming. In conjunction with NBC, Intel's Intericast is currently in use on some NFL games and *The Tonight Show*. So when PBS didn't do it, we now know who did. ■

If this is Secaucus, it must be Panasonic

By the time broadcasters get their problems sorted out, it looks like the set manufacturers will be able to provide receivers. Panasonic has recently completed development of the world's first single-chip device that will decode digital TV video signals and

format them for display. The chip was designed as a low-cost solution for use in DTV receivers and set-top converter boxes that can be used with today's analog TV sets, as well as with computers and other digital products under development. The IC can decode and

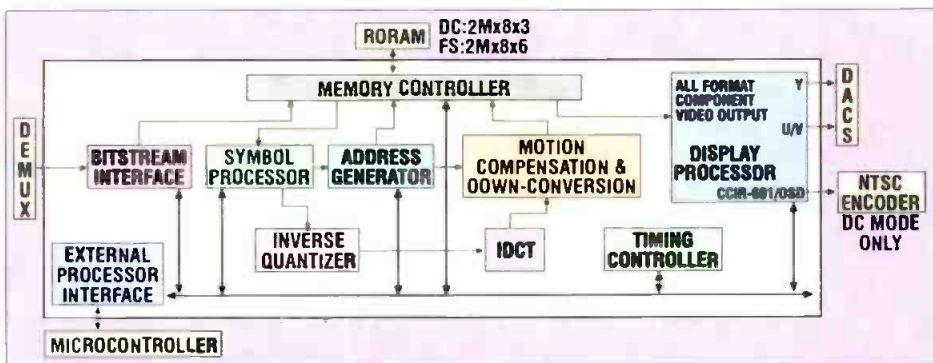

Hello, I'm "Roswell".




Let me introduce myself.

I'm the automation solution for the new era of multichannel digital television. With video compression, data networks and digital storage rapidly changing every broadcast operation, a comprehensive management solution is essential. I'm Roswell, the facility management system that puts you in control.

A New Solution for the New Broadcast Paradigm.

Designed from the ground up, Roswell uses the most advanced technological resources to provide a unified solution, one that considers and accommodates the entire broadcast operation. Integrating the management of schedules, storage media and playback resources, Roswell totally coordi-

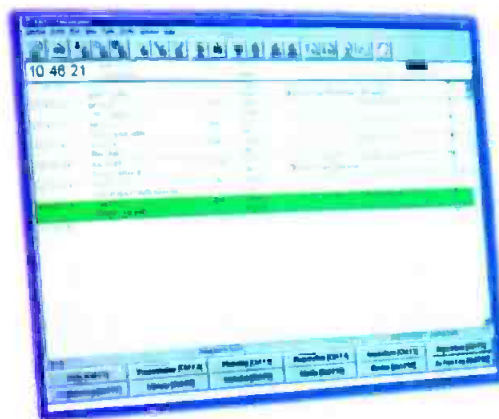

nates on-air operations with traffic and other departments.

Powerful Yet Familiar.

The heart of the Roswell system is a suite of software applications with a system architecture designed for the complex media and material management requirements of the future. Powered by Windows NT and an Oracle database, Roswell includes a networked client-server architecture that supports standard software interfaces. The collective wisdom of an elite Odetics engineering team, Roswell provides a scalable solution that easily expands to accommodate your growing needs.

To learn more about Roswell, contact your nearest Odetics sales associate or visit the WEB at: <http://www.odetics.com/broadcast/>



Roswell, the forward-thinking facility management system.

The Americas (714) 774-2200 Europe +44 (0) 118 927-4600 Asia +65 324-0636
WWW <http://www.odetics.com/broadcast/> Email: broadcast-sales@odetics.com

© ODETTICS, INC. 1997 12552

Circle (21) on Free Info Card
www.americanradiohistory.com

©1987 Sony Electronics Inc.

©1987 Sony Electronics Inc.

©1987 Sony Electronics Inc.



Versatile pre-read functions

Analog Betacam playback

Four uncompressed audio channels

Proven bit reduction technology



**Upon
this rock,
ye shall build
your facility.**

Digital BETACAM

With more than 23,000 units already in use, Sony Digital Betacam® format is the solid foundation for a broad spectrum of video operations. From electronic cinematography to archiving, Digital Betacam equipment delivers impressive quality and cost efficiency, as well as playback compatibility with media created on over 350,000 analog Betacam and Betacam SP® machines. Its technical attributes have been carefully conceived with an eye toward the future, starting with a 4:2:2 component digital video signal with 10-bit resolution for superior picture quality. Extremely robust compression stands up to dozens of generations and layers with flawless performance. With its legendary reliability, and new low cost of parts and ownership, it's no surprise the Digital Betacam format has such a faithful following. 1-800-635-SONY, ext. DVW www.sony.com/professional

4:2:2 component digital signal quality


Adaptable digital and analog I/O

10-bit resolution

SONY

14 WAYS TO BEAT RACK BOREDOM

Rack buyers who are bored with the same old specs are finding NEW and exciting features to think about when they consider Winsted's VRx.

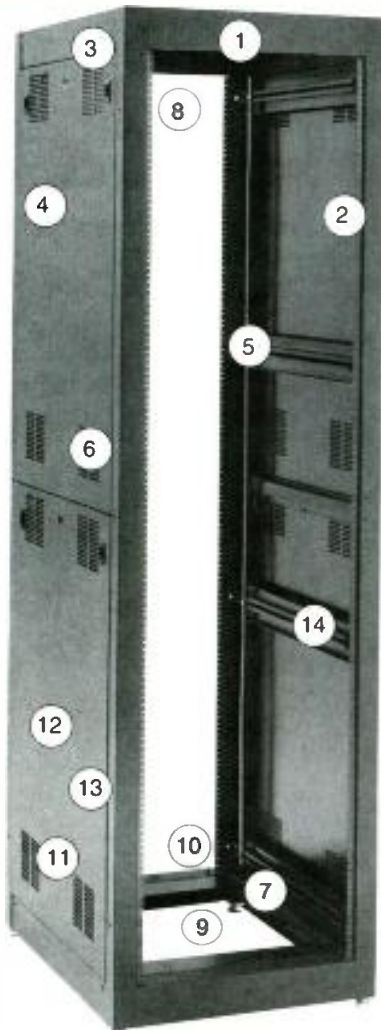

1. Mounting holes in top for eye-bolts.
2. Fully adjustable rack rails.
3. Heavy-duty welded construction.
4. Lift-off side panels.
5. Tapped rack rails, front & rear.
6. Black textured long-life finish.
7. Cable management system.
8. Conduit knock-outs, top & bottom.
9. Open top & bottom w/EIA rack rails.
10. Two grounding lugs.
11. Venting top and bottom.
12. Racks meet strict EIA standards.
13. Tested by an independent testing company.
14. 78-3/4" (45U) of usable rack space.

These new racks improve on long-standing industry standards and are built to last a lifetime. Call a Winsted design engineer at 800-447-2257 for a free consultation or....

For a FREE catalog, call or write :
1-800-559-6691



10901 Hampshire Ave. So., Minneapolis, MN 55438-2385

Fax 612-944-1546 • Web site: www.winsted.com •
email racks@winsted.com

Preferred by Professionals Worldwide™

Circle (22) on Free Info Card

display all 18 different TV formats.

Panasonic calls its new chip a digital TV MPEG-2 Main Profile@High Level video decoder. It is used after a receiver's MPEG-2 transport demultiplexer, which splits the signal into digital video, digital audio and data. When the chip receives this digital video stream, it then processes it in two ways. The chip will decode the stream for display in its original format, the full-spec mode, (HDTV) 1,080-line interlace or the 720-line progressive scan modes, or it will convert down for use with today's analog devices in its SDTV 480-line, either interlace or progressive, scan formats.

The single-chip operation is made possible by use of 500MHz concurrent 16Mb ram bus DRAMs. What makes this chip particularly unique is that it is fabricated in a 0.35 micron process in

a 240-pin device package.

In an interview with Dr. Sai Naimpally, vice president of Panasonic's American Laboratories, Inc., he told me that the chip would be available in the third quarter of this year. Naimpally emphasized the fact that his chip will be the basis for downconversion of all formats to NTSC, extending the life of today's TV sets past the demise of today's analog service.

To make sure there was no miscommunication, I asked if the Panasonic chip would support large-screen displays, such as projection, with quality. Naimpally said, "Yes. HDTV is for larger screens, but this chip will allow you to watch downconverted signals on a smaller screen. So, while HDTV is great for large screens, our chip can also support small-screen units. You may quote me on that." ■

DTV '97 a success

Broadcast Engineering's fourth annual conference on digital television, DTV '97, in Chicago, Dec. 3-5, was a standing-room-only show with more than 230 broadcast industry professionals in attendance. The conference provided a unique forum for the latest developments in the DTV arena. Dr. Joseph Flaherty, CBS, was the keynote speaker and addressed "America's Digital TV/HDTV Millennium." Laurence Thorpe, Sony, spoke on "The Great Debate: Interlace vs.

Progressive" and Bruce Miller, WHD-TV, spoke about "DTV: How Do You Define It?"

Additional speakers and conference sessions covered a range of important topics from digital studios to digital transition to RF and digital production. For more information on the conference and the papers, visit www.technicalpress.com. ■

Larry Bloomfield is a former chief engineer, industry consultant and author, located in Bend, OR.

**DIGITAL
TELEVISION '97**
December 3-5, 1997 • Westin O'Hare • Chicago

FCC Update

Auction rules proposed

The FCC, in a Notice of Proposed Rulemaking released Nov. 26, proposed auctions to resolve the mutual exclusivity among pending applications for new broadcast facilities. These proposed rules would affect most of the 450 applications for new TV stations that are now pending. Following are the highlights of the auction proposal:

- In cases where an entire group of mutually exclusive applications was on file before July 1, 1997, only those appli-

cants who achieved cut-off status by June 30 will be eligible to participate as bidders. Additional applicants/bidders may be solicited by the commission in situations where one or more applications were filed after June 30, 1997. This is the case even where the cut-off or window notice was issued before July 1.

- Groups of mutually exclusive applicants may settle their cases without regard to the settlement cap rules where all of the applicants reached cut-off

TRAVEL AT THE SPEED OF THOUGHT

Think
Done.



YOU'VE GOT 15 MINUTES. WITH A STRATASPHERE™ NONLINEAR EDITING SYSTEM YOU CAN DO 33 LAYERS, 19 DVEOUS™ EFFECTS WITH DROP SHADOWS, 26 WIPES, 17 ALPHA KEYS, 44 DISSOLVES, 3 TITLE ROLLS, COMPOSITE IT ALL, MIX YOUR AUDIO, FINISH 4 DIFFERENT VERSIONS, AND STILL HAVE TIME TO CHANGE YOUR MIND. IMAGINE WHAT YOU CAN DO WITH 20 MINUTES.

STRATA **SPHERE**



The Ultimate Drive Machine.™

THE KEY TO UNLEASHING YOUR CREATIVE POTENTIAL IS WITHIN REACH. EXPERIENCE REALTIME CREATIVITY IN THE FAST LANE.

CALL US NOW TO SET UP A TEST DRIVE.
TOLL FREE [888-846-7017]

scitex 
DIGITAL VIDEO

WEB: WWW.SCITEXDV.COM

Circle (23) on Free Info Card
www.americanradiohistory.com

status on or before June 30, 1997. Applications filed after June 30 will be subject to the settlement caps, and settlements will be permitted only if the commission decides to allow licenses in such cases to be awarded through settlements rather than auctions.

- In connection with settlements of cases involving groups of pre-July 1 applicants, the commission is inclined to permit "white knight" settlements, which involve awarding a permit to a non-applicant third party.

- The commission is proposing to defer resolution of basic qualifying issues regarding auction participants until after a winner is selected, and petitions to deny or to enlarge issues would not be accepted until after a winning bidder is announced.

An auction participant who hasn't filed a Form 301 (long-form) will not have to file unless it wins the bidding. Only a brief identifying form (Form 175) will have to be filed in advance.

- Winning applicants may not be required to certify reasonable assurance

of transmitter site availability in their long-form applications. Instead, the commission would rely on strictly enforced construction deadlines to ensure speedy initiation of service.

- All applications for LPTV and TV translator stations that are mutually exclusive with others will be made subject to the "open" auction procedures described above, even if they reached cut-off status before July 1, 1997.

Minimum opening bids for auctionable commercial broadcast licenses will be set. A minimum up-front payment will have to be filed by each bidder with its Form 175. The payment amount will represent a percentage of the projected value of the license as determined by the FCC.

- Within 10 days after the FCC's release

of a public notice identifying the winning bidder, the successful bidder will have to supplement its up-front payment so as to bring its total deposit up to 20% of the winning bid. The remaining 80% of the winning bid would be due 10 business days after public notice that all challenges have been resolved and the CP is ready for grant.

- Consistent with prior law governing auctions, the commission is seeking comment on whether it should extend bidding credits, reduced up-front payments/down payments and/or installment payment terms to small businesses, minorities and rural telephone companies. The comments were due this month. The commission should adopt its auction rules this summer and conduct its first auctions next fall. ■

Dateline

TV stations in Kansas, Oklahoma and Nebraska are required to file their renewal applications by Feb. 2. TV stations in Texas must file their license renewal applications by April 1.

Commercial TV stations in the following states must file their annual ownership reports by Feb. 2: Arkansas, Kansas, Louisiana, Mississippi, Nebraska, New Jersey, New York and Oklahoma.

Tower owners in California and Ohio must register their towers between Feb. 1 and Feb. 28.

Program

Audio

Data

ISDN

Voice






Intraplex

www.intraplex.com

Intraplex, Incorporated

3 Lyberty Way, Westford, MA 01886

Tel: 978 692-9000 Fax: 978 692-2200

Intraplex, the leader in broadcast digital transmission.

Intraplex ISDN.

Broadcasters rely on Intraplex for high-quality, flexible IT transmission solutions. Now, Intraplex quality and flexibility are available over ISDN.

IntraLink™, the industry's first fully modular ISDN multiplexer, allows broadcasters to combine high-quality program audio, voice and data on a single ISDN circuit. Connect and configure up to six individual BRI's in a single rack unit shelf, and manage multiple channels and codecs from a single PC. Flexible and space-efficient, IntraLink™ redefines ISDN for broadcast.

OutBack™ ISDN audio codec is the ideal companion for remote broadcasts. Compact and affordable, the OutBack™ provides "plug and play" ISDN connections, one-touch call set-up and auto-detection features that simplify use, with ISO/MPEG Audio Layer II coding up to 20 kHz.

Maximize your investment. Call us today.

Circle (24) on Free Info Card

If you haven't noticed
the growing importance
of audio in video
consider
this
your



wake up call.

©1997 Orban, Inc.

A Harman International Company

If you haven't already noticed, home theater sales are booming. Which is why you're hearing more about *Orban* these days. Our television products are helping stations deliver superior sound. And the better the audio, the better the video experience. Phone: 1 510-351-3500. Fax: 1 510-351-0500.

orban

Audio Is Good Video




www.orban.com

Circle (12) on Free Info Card

www.americanradiohistory.com

Facing reality

BY LOUIS LIBIN



Louis Libin

Digital television is really on its way! The final details are now falling into place. Broadcasters will have the correct channels, stations will be able to purchase the correct equipment and build workable facilities, and viewers will be able to watch digital television. After all these years of discussion, consumers will see and hear the benefits of high-definition digital broadcasts.

Broadcasters have promised the FCC that there will be at least one DTV station in each of the top 10 markets by November of 1998. At that time, digital television will premier in at least the 10 largest TV markets: New York, Los Angeles, Chicago, Boston, Philadelphia, Washington, Atlanta,

Detroit, Dallas-Fort Worth and San Francisco. Other markets must soon follow. By May of 1999, the top 10 markets must be on the air and the top 30 markets (reaching 50% of U.S. TV households) by November 1999. Broadcasters will continue to carry traditional analog NTSC broadcasts until at least 2006. Currently, the FCC timetable requires broadcasters to surrender their licenses by 2006 for all NTSC channels.

The transition

Stations have three basic choices to make regarding the switch to DTV. This means that stations must decide how extensive the conversion to DTV

equipment will be in the initial station DTV build. The first choice is to be the market leader. The station could choose to produce the local news, weather, sports, commercials and programs in full HDTV. This would require the entire studio and production centers to be replaced or changed to digital in order to handle either uncompressed or mildly compressed HDTV. This scenario does load the station with the maximum possible investment in equipment — upconversion hardware, new cameras, production/on-air switchers, DVE and graphics equipment, DTV-capable storage devices and a host of smaller support equipment.



The Driving Force in Robotic Camera Control

robotics
Division

Going 'robotic'? Radamec has become the world leader in robotic camera control, by using the latest technology to create simple to operate, flexible control systems that allow you to position your cameras just where and when you want them, every time.

Add this to a product range from pan and tilt heads to the most advanced freely navigating robotic pedestal - RP2, and our commitment to customer support and you'll see why our systems are in daily operation in News studios, Remote Interview Studios, Parliaments and Legislatures around the world.

Going robotic? Then make your first call to us on + 44 (0)1932 561181.

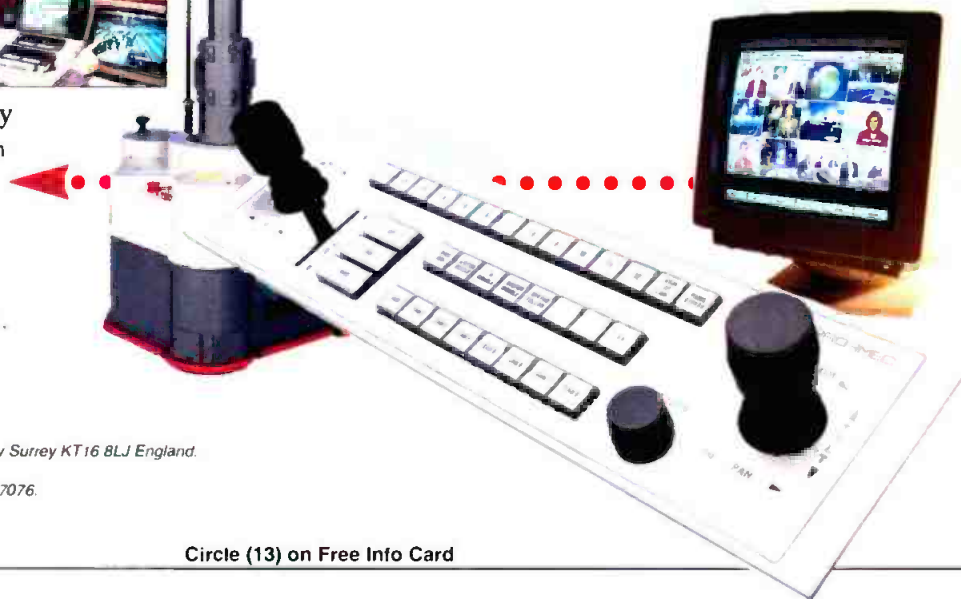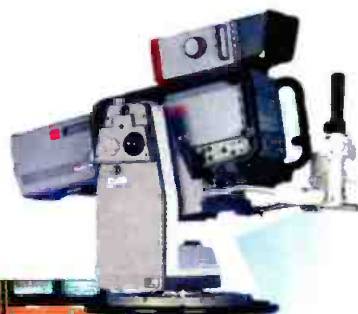

RADAMEC
BROADCAST SYSTEMS

Radamec Broadcast Systems Ltd, Bridge Road, Chertsey Surrey KT16 8LJ England.
Tel: +44 (0) 1932 561181 Fax: +44 (0) 1932 568836
Radamec Inc, 1916 Mary Ellen Lane, Scotch Plains NJ 07076.
Tel: +1 908 518 0685 Fax: +1 908 518 0687.
E-Mail: radamec_broadcast@lineone.net

Circle (13) on Free Info Card


Gentlemen, Start Your Engines...



It doesn't matter if you are covering a local news story or the Super Bowl. There are no second chances in mobile production. Maybe that's why so many mobile trucks are rolling out with PESA Switching Systems routers.

Cougar 32x32
Routing Switcher


Jaguar 64x64
Routing Switcher

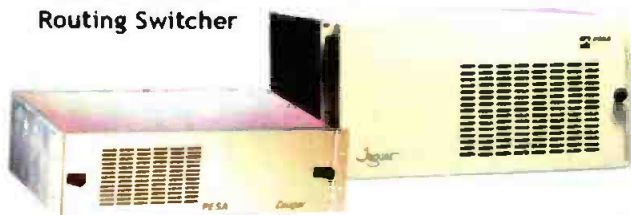

The Cougar 32x32 and Jaguar 64x64 offer high performance and rugged construction in a small footprint. You want to talk about compact? How does a 144x144 Tiger matrix consisting of 12RU video and 8RU audio frames sound to you?

- Digital or Analog
- Windows Based Control
- Software Reentry & Virtual Matrix Mapping
- Pathfinding Capability

The race is on. Make sure your truck is powered by PESA Switching Systems.



PESA
Switching
Systems

Tel: 800-328-1008
Fax: 516-845-5023
<http://www.pesa.com>
Circle (14) on Free Info Card



Going halfway

The second option is to simply upconvert the local NTSC to DTV. In this scenario, all locally produced NTSC is upconverted to digital (SDTV or simulcast HD) and network feeds are passed through without modification. This signal is then mixed with the network feed. Network pass-through equipment and a DTV upconverter and MPEG-2/transport encoder are required. This approach represents a medium-cost selection.

The minimalist approach

This scenario will be the initial solution for many small-to-medium stations. It is known as *the network pass-through scenario*. In this case, the digital (DTV) network feeds are stored on digital VCRs and/or video servers, probably at 19Mb/s. The broadcast is then sent through new digital transmitters. This scenario poses the minimum investment that can be made for DTV transmission. The basic equipment needed are the transmitter, the antenna and waveguide, the downlink and

19Mb/s-capable storage devices.

Limited help from above

Networks are now beginning to make plans for their owned-and-operated stations, as well as the affiliated stations. It is not clear that the networks are planning well for the affiliate stations. The affiliate stations must make their own determinations on their entry into the DTV world. Station managers are going to have to decide how DTV will fit into the facility. NTSC will continue as the only revenue generating stream — perhaps for a long time. This means that the NTSC programming and technical facilities cannot be compromised in any way. This could require additional technical and operations personnel.

Begin doing your homework now. Develop a cost-benefit scenario for each of the three general approaches. Once dollars are attached to operational features, your station's specific plans can be determined. ■

Louis Libin is a broadcast/FCC consultant in New York and Washington.

Expert's Corner

Facing reality

One issue central to many engineers is compression. That would be difficult enough to grasp, but add to that the likelihood that delivered signals may have passed through several different compression encoders or systems and the potential for quality impairments looms large. To see how fellow engineering leaders are handling the issue, *BE* contacted two readers and two vendors of compression technology for their viewpoints.

The questions posed included:

- What user problems do you see with the widespread use of compression?
- Are sufficient solutions available?
- Is there sufficient compatibility between the different compression products to ensure trouble-free exchange of materials and programming?

User problems:

One that immediately comes to mind is off-air recording. Many stations rely on off-air demod feeds of local stations for sports clips. These clips could be archived in a news tape morgue for use later, so it will be interesting to see how one decode and re-encode of the 19.39Mb/s stream really works.

Maybe the 19.39Mb/s stream will provide its own inherent copyguard system for home VCR duplicating. Video/audio latency is another issue and one that must be dealt with.

Cascading of compression devices:

I see a big potential for problems here especially if different algorithms are used in the devices. However, I read that someone (Snell & Wilcox) is working on carrying the motion vector information through on a decode and re-encode. This may make it possible to do several decodes/re-encodes before visible artifacts appear. Handling the



Joe Snelson, vice president of engineering, Meredith Broadcasting, director of engineering, KCTV, Kansas City.

IN STOCK Ready to Ship!

ZERO Stantron's most popular vertical welded cabinet is now in stock!

Standard Features

- Same day shipment
- Aggressively priced
- 78 3/4" usable panel space (45 rack units)
- 87 1/4" overall height and 30 7/8" overall depth
- Manufacturing facilities in California, Indiana and Massachusetts

ZERO Stantron's STOCK 200 vertical equipment cabinets lead the industry in design and construction. We offer the industry's most comprehensive line of standard accessories. Make the smart choice. Call ZERO Stantron today at 800-821-0019!

ZERO
"the neat idea people"

Stantron
A ZERO Corporation Company

12224 Montague Street
Pacoima, CA 91331
Tel: (800) 821-0019
Fax: (818) 896-1160
Website: <http://www.zerocorp.com>

Durable black textured finish

Removable top panel

2 pairs 10-32 tapped fully adjustable 19" rails

Heavy-duty welded steel frame

Removable "security" side panels

Extra deep cabinet space 30.88"

Open bottom for ventilation or cable management

Raised partition base with caster option

Ships Fully Assembled

STOCK 200

Circle (15) on Free Info Card



At Best Power, everything points up, because
our **uninterruptible** power systems keep
you up and running.

Best Power products are **reliable**, with a
field-proven mean time between failure up to 300,000
hours. That's why Best Power was **voted #1** in
product **quality**. If **uptime** matters,
demand the most reliable UPS solution.

Demand Best Power.



When it comes to reliability,
Best Power never stops.

1.800.356.5794 • www.bestpower.com

*VARBusiness 1997 APEX Study conducted by Charles River Strategies.

Circle (25) on Free Info Card

LOOKING FOR A WAY TO TEST

THERE'S ONLY ONE



HP ESA-L1500A Portable Spectrum Analyzer:
Low cost, high dynamic range, spectrum analyzer for return path and ingress maintenance.



HP 8594Q QAM Analyzer:
Transition smoothly to digital RF testing with comprehensive RF, modulation and data quality measurements.



HP E6277A MPEGscope DVBplus:
Real-time measurements and monitoring of MPEG streams.



HP 8591C Cable TV Analyzer:
The industry's only one-box tester for all non-interfering RF and video measurements.

Your subscribers depend on you—you can depend on Hewlett-Packard. HP has dedicated itself to keeping your broadband system at peak performance by providing a complete range of test solutions for:

• R & D • Manufacturing • Headend • Field

Be Prepared for the Interactive Technology of the Future.

To stay competitive, you have to be prepared for new digital technologies—including interactive services. And you have to know that the products you buy

YOUR NETWORK FROM END TO END?

ROAD TO TAKE.



HP E6000A Mini-OTDR:

Fast, easy and accurate optical fiber analysis during cable installation, maintenance and restoration.



HP 89440 Digital Video Modulation Analyzer:

Lets you characterize QAM signals on cable systems and VSB signals used in broadcast transmissions.



HP E4480A SONET/ATM/T-Carrier Test Set:

A field-portable test set for installation, qualification and maintenance of optical networks.



HP Calan 3010R/H Sweep/Ingress Analyzer:

Install and maintain forward and return paths quickly and accurately, all in the presence of ingress.

Today will meet your needs well into the future. HP gives you a unique range of products to make sure your cable system always delivers quality service to your subscribers.

Performance from End to End.

There's only one way to go for broadband test products: HP. No one offers a more complete range of test equipment to keep your entire broadband system up and running today—and down the road.

For more information, call: 1-800-452-4844, Ext. 5663

© 1998 Hewlett-Packard Co. TMM11730.2/3E

www.hp.com/go/catv



**HEWLETT
PACKARD**

Circle (26) on Free Info Card

www.americanradiohistory.com

decode and recoding of AC-3 wasn't mentioned. As I understand it, Dolby only designed that to be one pass-through for the transmission system (speaking of the Grand Alliance stream).

Light compression of the original material and subsequent feeds through cascaded devices (also using light compression) will work. It must work because so much of our production mate-

rial is layered. I feel 360Mb/s (SMPTE "mezzanine level" compression) will be the logical answer in the future.

Are solutions available today and are they compatible?

I think solutions are available, it's the product that you can't buy, yet. We don't even know what kind of plug to use on the end of the cable at the

present. Should it be parallel, coax or fiber? We desperately need standards. SMPTE is working on this.

The product is too new. This is particularly true in compressing HDTV into the Grand Alliance stream. As an example, there were initially compatibility problems between the MELCO and Grand Alliance encoders/decoders.



Ed Fraticelli, director of engineering, Production Masters, Inc. Pittsburgh.

User problems:

Mainly, the problem area of widespread compression use surrounds the DTV standard of using MPEG-2 compression of video signals. MPEG-2 is a compression technique that allows subjective variables that must be "tweaked" for optimum results, depending on the program content. The position of "compressionist" has come into being as a result of this. Facilities that prepare feature film material for DVD use, for example, rely on

this person to optimize compressed files, as much as the colorist who transfers them. With the DTV broadcast model that I have seen, all digital video is "baseband" video, of whatever resolution is being used, and an MPEG-2 compressor is part of the encoder that is placed before the transmitter, which is set, I suppose, to some preset parameters.

Cascading of compression devices:

There is a possibility that compression devices connected in serial could cause a problem with image quality, especially if broadcast production departments and independent production facilities begin to use compression in the production chain. At this point, uncompressed video is the production standard for final program materials, but this could change, if non-linear "loss-less" compressed systems and tape formats that use compression come into use in production. For instance, Beta-SX uses MPEG-2 4:2:2-profile compression, while Avid uses JPEG compression, and DTV uses MPEG-2 main-profile, etc. Does each turn of compression introduce artifacts that trigger other artifacts in the next compression level? How do we test this? Many questions remain to be answered.

THE ULTIMATE IN DIGITAL.

(PRICES START AT JUST \$6,995)



POWER



fast forward video

OMEGA™

DIGITAL VIDEO RECORDERS

• Series available in three versions:

- ◊ OMEGA Deck - Single channel
- ◊ OMEGA Double Deck - Dual channel version
- ◊ OMEGA RAID Deck - Dual channel recorder with built-in RAID controller

• Plug-in replacements for most commonly used broadcast analog tape decks

- Random access, looping
- Non-linear and A/B roll editing

• Instant replay with dynamic tracking


- Program automation, commercial insertion
- Clip and still storage
- NTSC & PAL
- CD quality stereo balanced audio
- Motion-JPEG compression as low as 2:1
- Front panel controls with LCD touch screen
- Uses standard SCSI fast & wide disk drives

1 (800) 755-8463 • (714) 852-8404 • fax: (714) 852-1226 • www.ffv.com

Circle (27) on Free Info Card

www.americanradiohistory.com

First, we broke the
4:2:2 digital price barrier.
Now, we've smashed it
to smithereens!

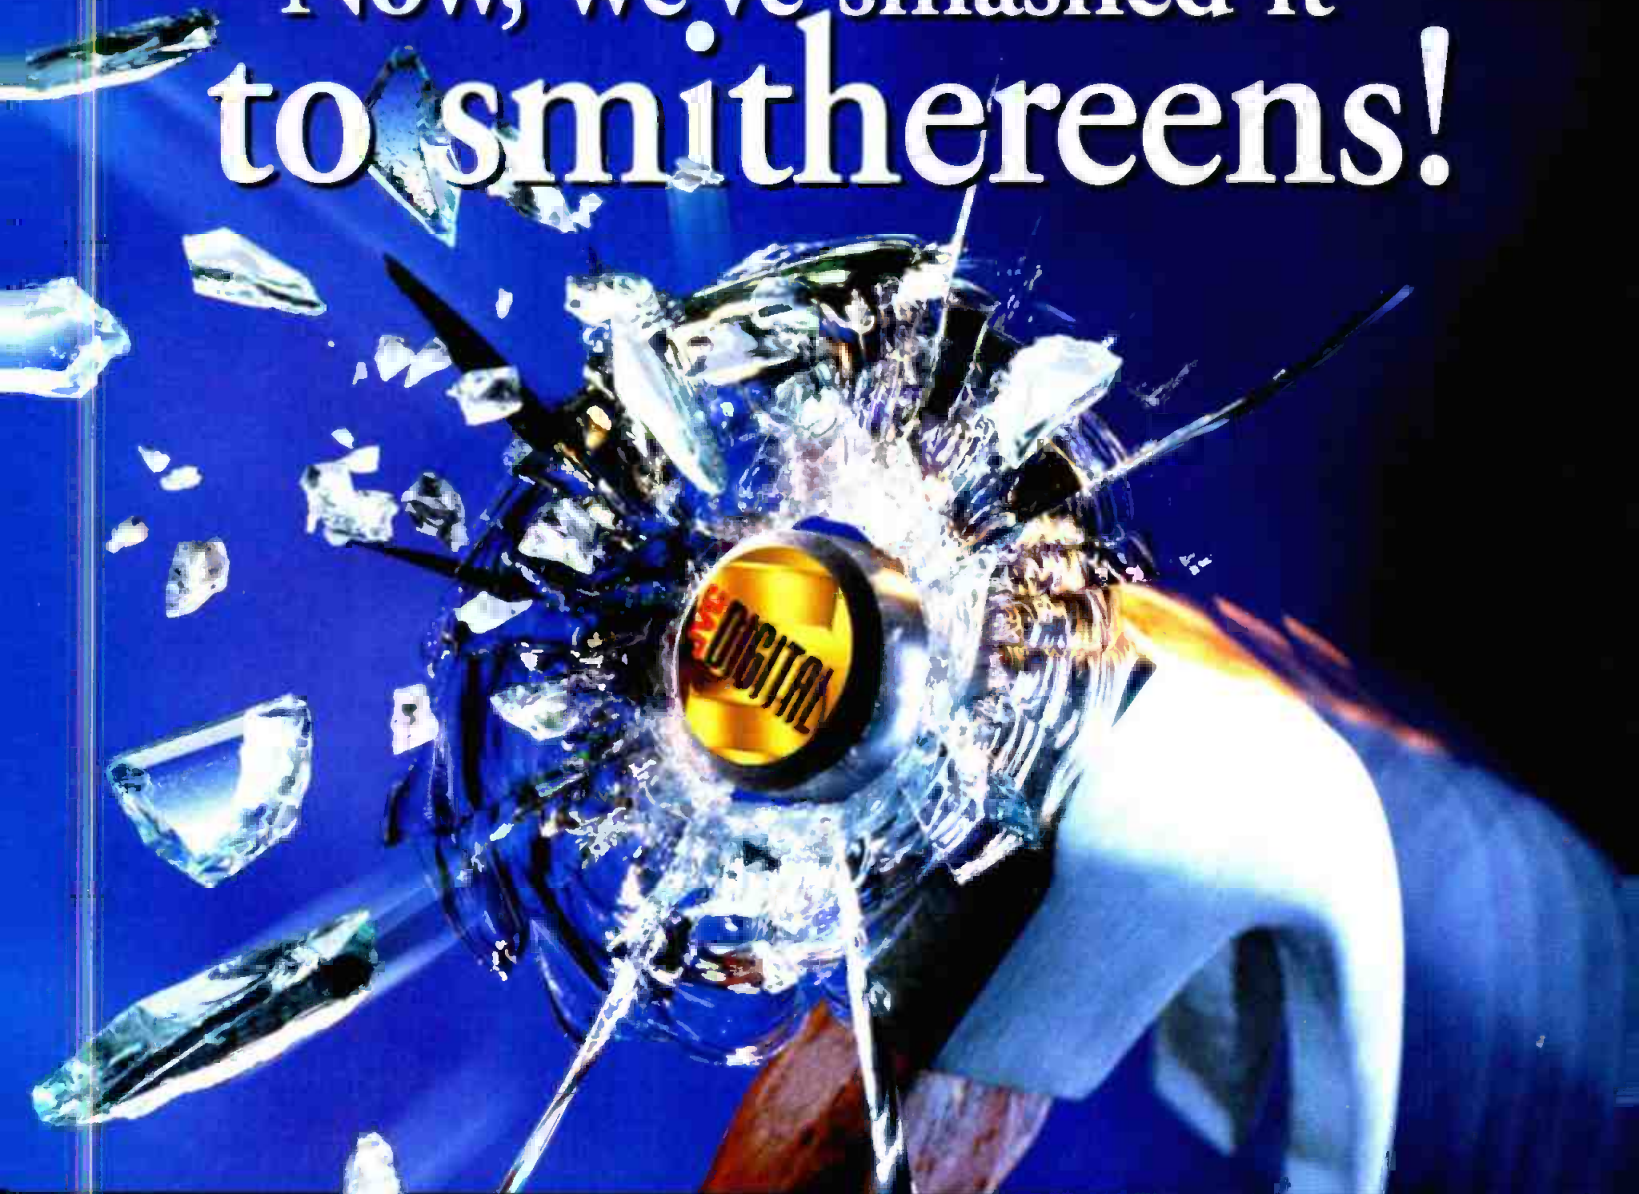

Get into Digital-S for less than \$10,000.

The high price of 4:2:2 digital seemed to be set in stone until JVC made it an affordable reality. But breaking that price barrier wasn't enough. Because now, our new additions to the Digital-S line-up put this dynamic format in the hands of even the most cost-conscious professionals.

COMPONENT DIGITAL
4:2:2



Our new Digital-S components offer the same, astounding picture quality and most of the high performance features you'd find on the rest of the Digital-S family. Like 4:2:2 component processing, 3:3:1 compression

and 1/2-inch metal particle tape. They're even DTV ready. The new members of our Digital-S family include the BR-D750 Editing Recorder priced under \$10,000, the BR-D350 Player for under \$8,000, and the DY-700 Camcorder for under \$12,000.

Digital-S. Powerful performance

at a breakthrough price. For more information, visit our Web site at www.jvcpro.com or call us at 1-800-662-1337.

JVC
PROFESSIONAL

Circle (35) on Free Info Card

www.americanradiohistory.com

Are solutions available today and are they compatible?

One solution that is missing is a standard way to "transport" pre-compressed material to broadcast outlets. There no standardized tape format or other elec-

tronic transfer method to accomplish this, and mention of it does not appear in the DTV models I have seen. There should be a way for production facilities to compress program material at the production phase, and deliver an exact

duplicate of that material to every broadcast station and to every viewer receiver's decoder. This will be a problem when HDTV material is broadcast, because it will be highly compressed. ■

Vendor Views

We then posed the same questions to two companies who produce compression products.



Dr. Christopher Bennett, vice president of systems engineering, Tiernan Communications Systems.

User problems:

The problem is that the majority of users are unfamiliar with what the new technology can do. Because it is digitally based, it behaves differently from traditional analog technology. For example, the optimal structure of a compressed signal that is intended

for editing, in terms of I, B and P frames, will be different from one that is intended for playout. Another example is the multiplexing structure of a digital MPEG-2 transport stream, which allows users to package signal compo-

nents in ways that are not possible with analog systems.

Cascading of compression devices:

This is an operational issue, and the systems designer must choose a level of compression that will limit the degree of impairment to acceptable levels after repeated compression. However, the need to decompress and re-compress the signal repeatedly will be reduced as the studio and transmission systems become digital, through use of digital turnarounds, digital transcoders, etc.

Are solutions available today and are they compatible?

Compressed digital television is in its early stages of development. For certain applications, such as digital satellite news gathering, and event backhaul, the industry has provided excellent solutions, MPEG-2 4:2:2 studio profile being the latest.

However, the technology is still evolving rapidly, to provide enhanced performance or additional capabilities, or to create new systems such as HDTV, or to take advantage of miniaturization, leading to such things as digital encoders in the camera. We are a long way from seeing a full range of solutions covering all the user needs.

Through the use of common standards and well-publicized interoperability tests, such as those conducted by Intelsat, ISOG and EBU, the industry has achieved a high degree of compatibility. Tiernan has always regarded this an important objective, and was one of the first companies to demonstrate interoperability. We believe the question is so important that if we encounter non-standard modes we upgrade our equipment to make them available rather than leave our customers without an interoperable solution.

Ahmad Ouri, Americas marketing manager, server line of business, Philips Broadcast. (Photo not available.)

User problems:

The main problems pertain to compatibility and interoperability

issues between the existing compression formats. Also, there seems to be some confusion on what compression format to use for contribution vs. distribution and the quality level needed for each of the two entities. For example, it is advised to use a compression that preserves each frame of video (e.g. Motion-JPEG) when dealing with contribution applications such as editing. Other problems include misconceptions and lack of education about compression. End users see compression as an economical process that will help increase profits. However, choosing the wrong compression format for a certain application for

the purpose of savings in capital expenditures has proven to be a deadly mistake for some end users. Therefore, for compression to be a winning technology in the broadcast industry, we must educate ourselves and our customers about the various compression format offerings.

Cascading of compression devices:

There is theoretical and experimental proof that intermixing compression formats or performing multiple generation coding using certain compression algorithms will result in serious image degradation or concatenation errors. Therefore, when specifying devices for a facility infrastructure, you should consider the flow of information within that facility and the amount of processing that information will be subjected to. Based on that information, the appropriate compression format and bit rate can be selected.

Are solutions available today and are they compatible?

There are many solutions on the market today that use compression technology. Many of these solutions address specific applications and are formidable answers to a demanding customer base. However, on a system level, there is a lack of control interfaces and format/file compatibility between most of these systems. For example, there is a need to standardize Motion-JPEG file formats for contribution.

Therefore, there is a need for vendors to realize the need for these interfaces and standardizations. The first step is to have the control interfaces completed while using baseband serial digital video as the common format. The second step would involve adopting an industry standard compression format. ■

Add
\$50,000
Per Month
Income

"the TIME MACHINE"TM

Create Commercial Time



The Time Machine is a new, technological break through product, which reduces program time, to create commercial insertion time. It is a self contained, small 3U rack mountable unit which requires no data compression.

The Time Machine is capable of changing time without changing the pitch (frequency) of the video or audio programming. The Time Machine consists of a main frame which houses the memory and all of the electronics necessary for control of the video and audio-Time Machine storage. A maximum of

30 seconds of video and two channels of time reduction audio is available.

"the TIME MACHINE" **features include:**

- Edit down long programs
- Emergency news break with no program loss
- Adjustable time reduction
- No data compression
- Fully digital
- Solid State



The Digital Video People

Prime Image, inc., 19943 Via Escuela, Saratoga, California 95070

(408) 867-6519, Fax: (408) 926-7294, Service: (408) 926-5177

primeimagein@earthlink.net • www.primeimageinc.com

Circle (36) on Free Info Card

ON AIR

The new Origin
video computing
platform.
It's about time.
It's about



money.

Introducing the Origin™ video computing platform from Silicon Graphics. It's time you had everything you wanted, everything you needed and everything your competitors didn't want you to have in one, rack-mountable, digital broadcast platform.

Time will tell which digital video formats become the standards of our industry, so the Origin platform supports them all. From the biggest uncompressed formats to the most multi-channel playout streams, from HDTV to low bit-rate MPEG, run them all today.

Time also changes everything, so we've



AD INSERTS NVOD PROGRAM PLAYBACK ASSET MANAGEMENT	SDI DVCPRO™ MPEG1 MPEG2	ORIGIN VIDEO COMPUTING PLATFORM	HDTV ↔ SDTV UP TO 100 MPEG2 STREAMS
www.sgi.com			

given the Origin platform more scalability and flexibility than any dedicated box. Store months of on-line video, fast-network to any local desktop, run world-class applications, support standard automation systems and StudioCentral™ asset management environment. Want advanced graphics? Origin will let you add it. That's power and flexibility.

When you're ready to see what the best system in the industry can do, visit us on the Web. But don't wait too long. Time is money and of the two, we can only make you more of the latter.



SiliconGraphics
Computer Systems

The CCIR-601 component digital standard

BY MICHAEL ROBIN

North American and European digital standardization efforts resulted in CCIR Recommendation 601, "Encoding Parameters of Digital Television for Studios," now known as ITU R601. This recommendation established an agreement on a component digital approach that is compatible with the 525/59.94 and 625/50 scanning standards and is at the root of all subsequent component digital developments.

The recommended digital coding is based on the use of one luminance (E_Y) and two scaled color-difference (E_{CB} and E_{CR}) signals or the green (E_G), blue (E_B) and red (E_R) signals. The coded signals are defined by the following expressions:

$E_Y = 0.587 E_G + 0.114 E_B + 0.299 E_R$ (referred to as Y in North America)

$E_{CB} = 0.564 (E_B - E_Y)$ (referred to as Pb in North America)

$E_{CR} = 0.713 (E_R - E_Y)$ (referred to as Pr in North America)

These signals have the following characteristics when representing a 100% color-bar signal without setup (known

as a 100/0/100/0 color-bar signal):

- The luminance signal has a peak positive value of 700mV, no setup and a sync amplitude of -300mV resulting in a signal amplitude of 1Vpp.
- The scaling factors for the E_{CB} and the E_{CR} color-difference signal were chosen to obtain a bipolar signal with a p-p amplitude of 700mV. These scaling factors differ from those used with the composite analog NTSC and PAL signals or those used by the Betacam and MII component analog VTR formats.

Sampling rates

Early proposals for the values of the sampling frequencies of the Y signal specified a multiple of the subcarrier frequency (f_{sc}) of the associated composite video signal. This resulted in the 4:2:2 concept whereby the Y signal is sampled at a frequency of $4f_{sc}$ and each of the two color-difference signals is sampled at $2f_{sc}$, hence 4:2:2. The major achievement of CCIR-601 is specifying a set of sampling frequencies common to 525/59.94 and 625/50

scanning standards. The selected frequencies are common multiples of the horizontal scanning frequencies (f_H) of both standards. (See Table 1.) A family of sampling rates, common to both scanning standards and based on 3.375MHz has evolved. Table 2 shows how the sampling rates are derived.

Sampling frequency has a direct bearing on the frequency response and the number of horizontal picture elements (pixels) that the system can resolve. Rec. 601 specifies the low-pass filter (LPF) characteristics of the anti-aliasing (ahead of the A/D converter) and reconstruction (after the D/A converter) filters that determine the analog in/out frequency response characteristics.

For the 4:2:2 format, the resulting luminance bandwidth is 5.75MHz. This is a compromise between the slightly higher requirements of the 625/50 scanning standard and cost-optimized A/D conversion circuitry, and is worse than the analog studio signal distribution elements and state-of-the-art cameras. The color-difference signal bandwidth for the 4:2:2 format is 2.75MHz, which exceeds the chrominance bandwidth of the NTSC or PAL analog composite standards.


The 4:2:2 format provides high-quality pictures in scanning standards and allows for high-quality chroma-keying. The bandwidth is adequate for a single A/D and D/A pass. Multiple passes using analog in/out connections result in a progressive deterioration of the frequency response. The 4:4:4 format provides superior quality and has applications in high-end teleproductions. In this format, the luminance signal, as well as the two color-difference signals, are sampled at 13.5MHz.

Alternately, G, B, R signals may be sampled. The 4:1:1 format is used by some equipment and is suitable for situations where the bandwidth of the

FRAME GRAB

A look at tomorrow's technology.

Which DTV broadcast format do stations expect to transmit?

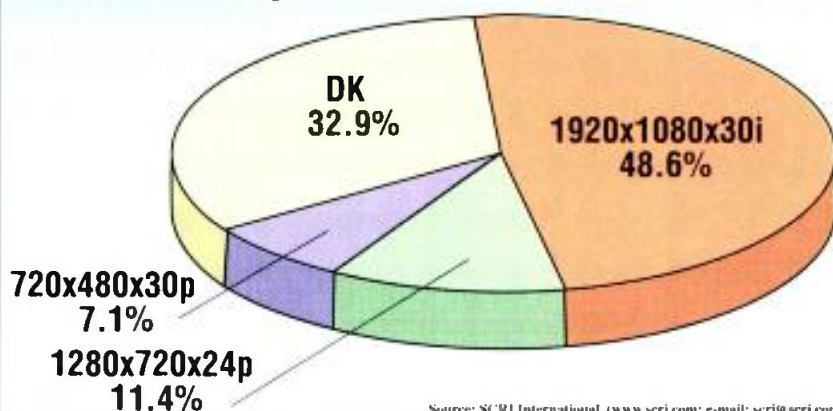

Source: SCRI International. (www.scri.com; e-mail: scri@scri.com)

color-difference signals does not need to exceed 1.5MHz.

The sampling frequencies result in an integer and equal number of sample periods during the active line periods

plitude values inside established limits. The quantizing process results in converting the measured voltages into digital data. It results in *quantizing errors* (Q_e), which are inaccuracies in the dig-

eight bits per sample, which allows for 256 levels (2^8) of amplitude information to be represented for each component. This number is reduced slightly by the need to provide some headroom,

SCANNING STANDARD	f_h (Hz)	E'_Y SAMPLING FREQUENCY (MHz)	E'_{CB} SAMPLING FREQUENCY (MHz)	E'_{CR} SAMPLING FREQUENCY (MHz)
625/50	15625	864 $f_h=13.5$	432 $f_h=6.75$	432 $f_h=6.75$
525/59.9	15734.25	858 $f_h=13.5$	429 $f_h=6.75$	429 $f_h=6.75$

Table 1. 4:2:2 component digital format sampling frequencies.

for the two scanning standards. The sampling strategy is called orthogonal sampling. In the 4:2:2 format, with twice as many luminance (Y) as chrominance samples, the chrominance samples (C_B and C_R) are time-coincident (cosited) with odd Y samples.

Sample resolution

The sampling process results in signal amplitude values measured periodically at the sampling rate. Analog signals may assume an infinite number of am-

ital representation of the analog signal, related to the number of bits per sample. CCIR-601 specifies a resolution of

which helps avoid analog signal clipping and results in a specified *quantizing range*. With eight or more bits per

SCANNING STANDARD	525/59.94			625/50		
COMPONENT	E'_Y	E'_{CB}	E'_{CR}	E'_Y	E'_{CB}	E'_{CR}
SAMPLING FREQUENCY (MHz)	13.5	6.75	6.75	13.5	6.75	6.75
NYQUIST FREQUENCY (MHz)	6.75	3.375	3.375	6.75	3.375	3.375
LPF CUTOFF FREQUENCY (MHz)	5.75	2.75	2.75	5.75	2.75	2.75
HORIZONTAL RESOLUTION (LPH)	≈ 455	≈ 218	≈ 218	≈ 449	≈ 215	≈ 215
SAMPLES PER TOTAL LINE	858	429	429	864	432	432
SAMPLES PER ACTIVE LINE	720	360	360	720	360	360
SAMPLES DURING H BLKG.	138	69	69	144	72	72

Table 2. 4:2:2 sampling structures and horizontal resolution.



“LOOK WILCOX, THE DIGITAL COMMUNICATIONS TREND IS CATCHING ON EVERYWHERE,” WHISPERED SNELL.

sample, Q_e manifests itself as random noise. The choice of eight-bit resolution is based on the state-of-the-art technology of the 1980s, and is satisfactory only with analog source equipment having a signal-to-noise-ratio (SNR) of about 50dB, which effectively masks the eight-bit Q_e .

Current studio equipment uses a

COMPONENT	8-BIT RESOLUTION	10-BIT RESOLUTION
Y	58.3dB	70.35dB
C _r AND C _b	58.7dB	70.74dB

Table 3. Theoretical SNR capabilities of eight-bit and 10-bit 4:2:2 formats.

resolution of 10 bits per sample. In 10-bit systems, there are 1,024 digital levels (2^{10}), expressed in decimal numbers varying from 0 to 1,023 or in hexadecimal numbers varying from 000 to 3FF.

Figure 1 shows the relationship between the E'_Y , E'_{CB} and E'_{CR} analog component signal levels corresponding to a 100/0/100/0 color-bar signal, as well as the 10-bit Y, C_B, C_R digital sample values. Note that the sync portion of the luminance signal is not



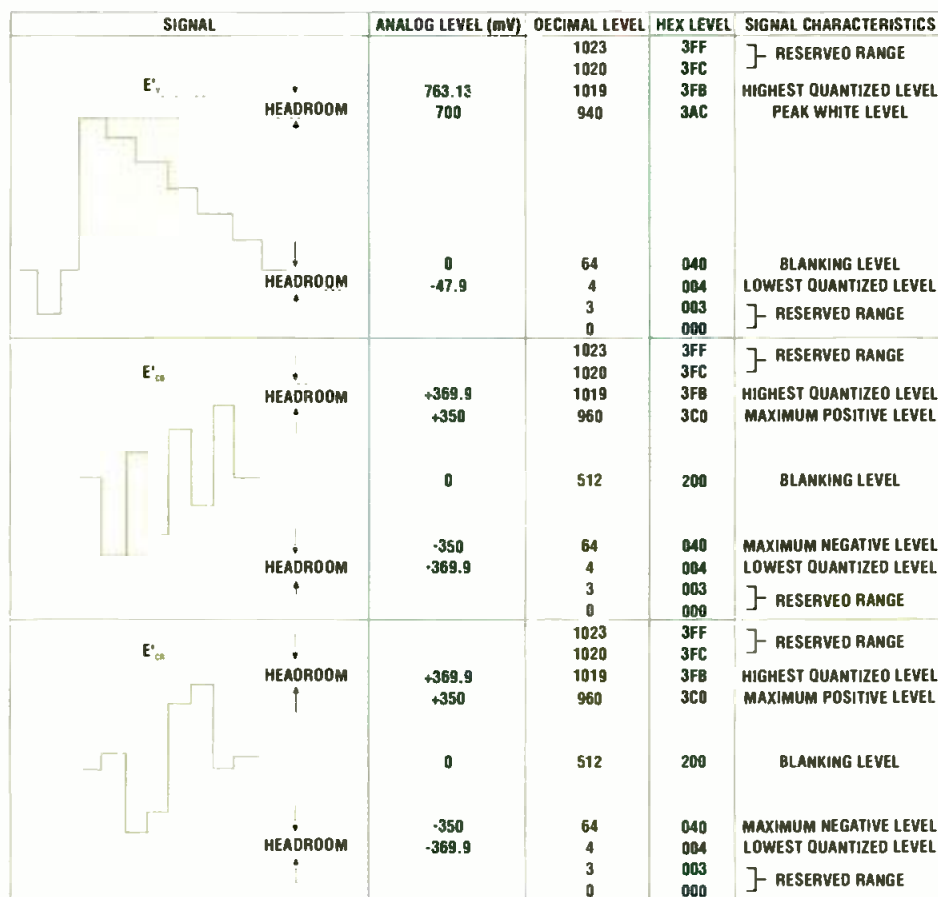


Figure 1. Relationship between component analog signal levels and 10-bit sample values.

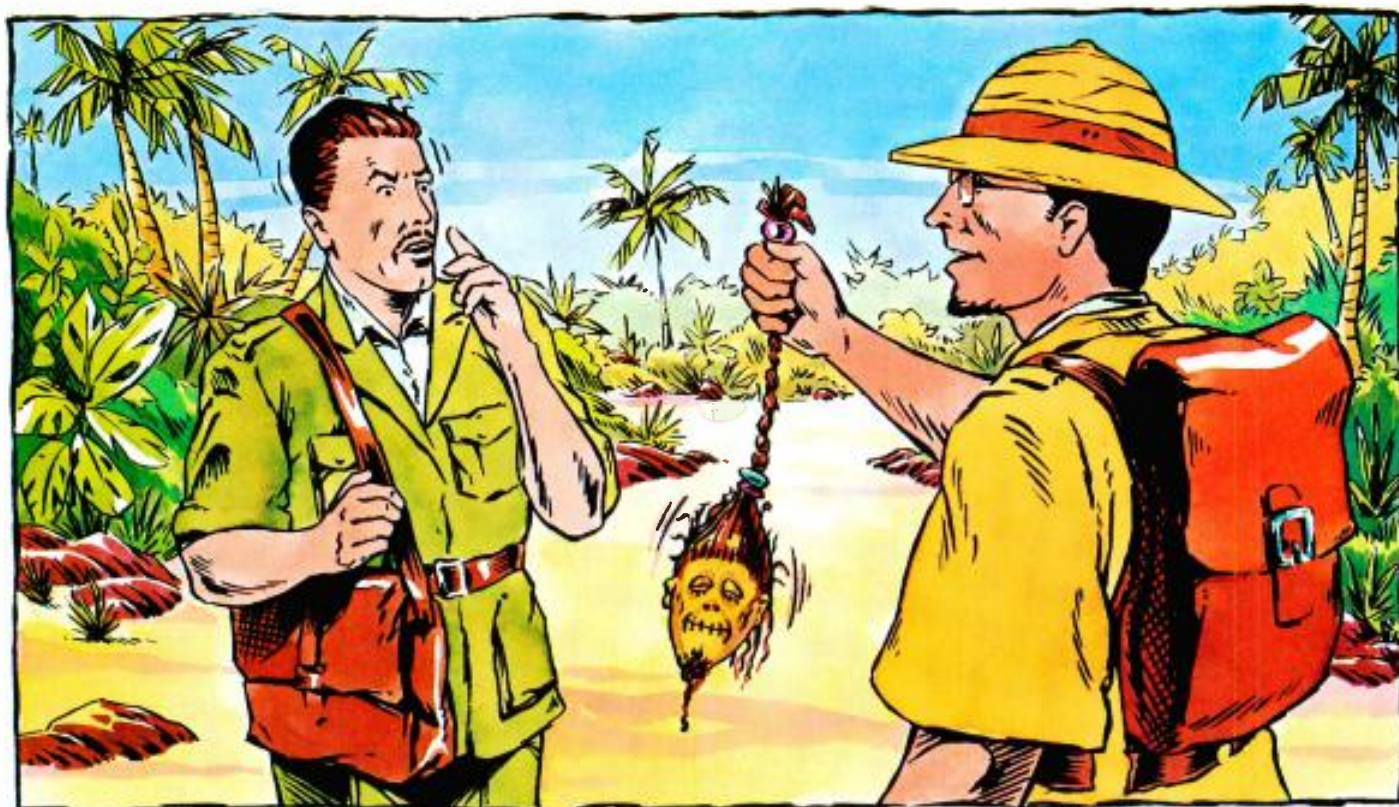

“CLEARLY THE RESULT OF AN EARLY EXPERIMENT IN COMPRESSION...” MUSED WILCOX.

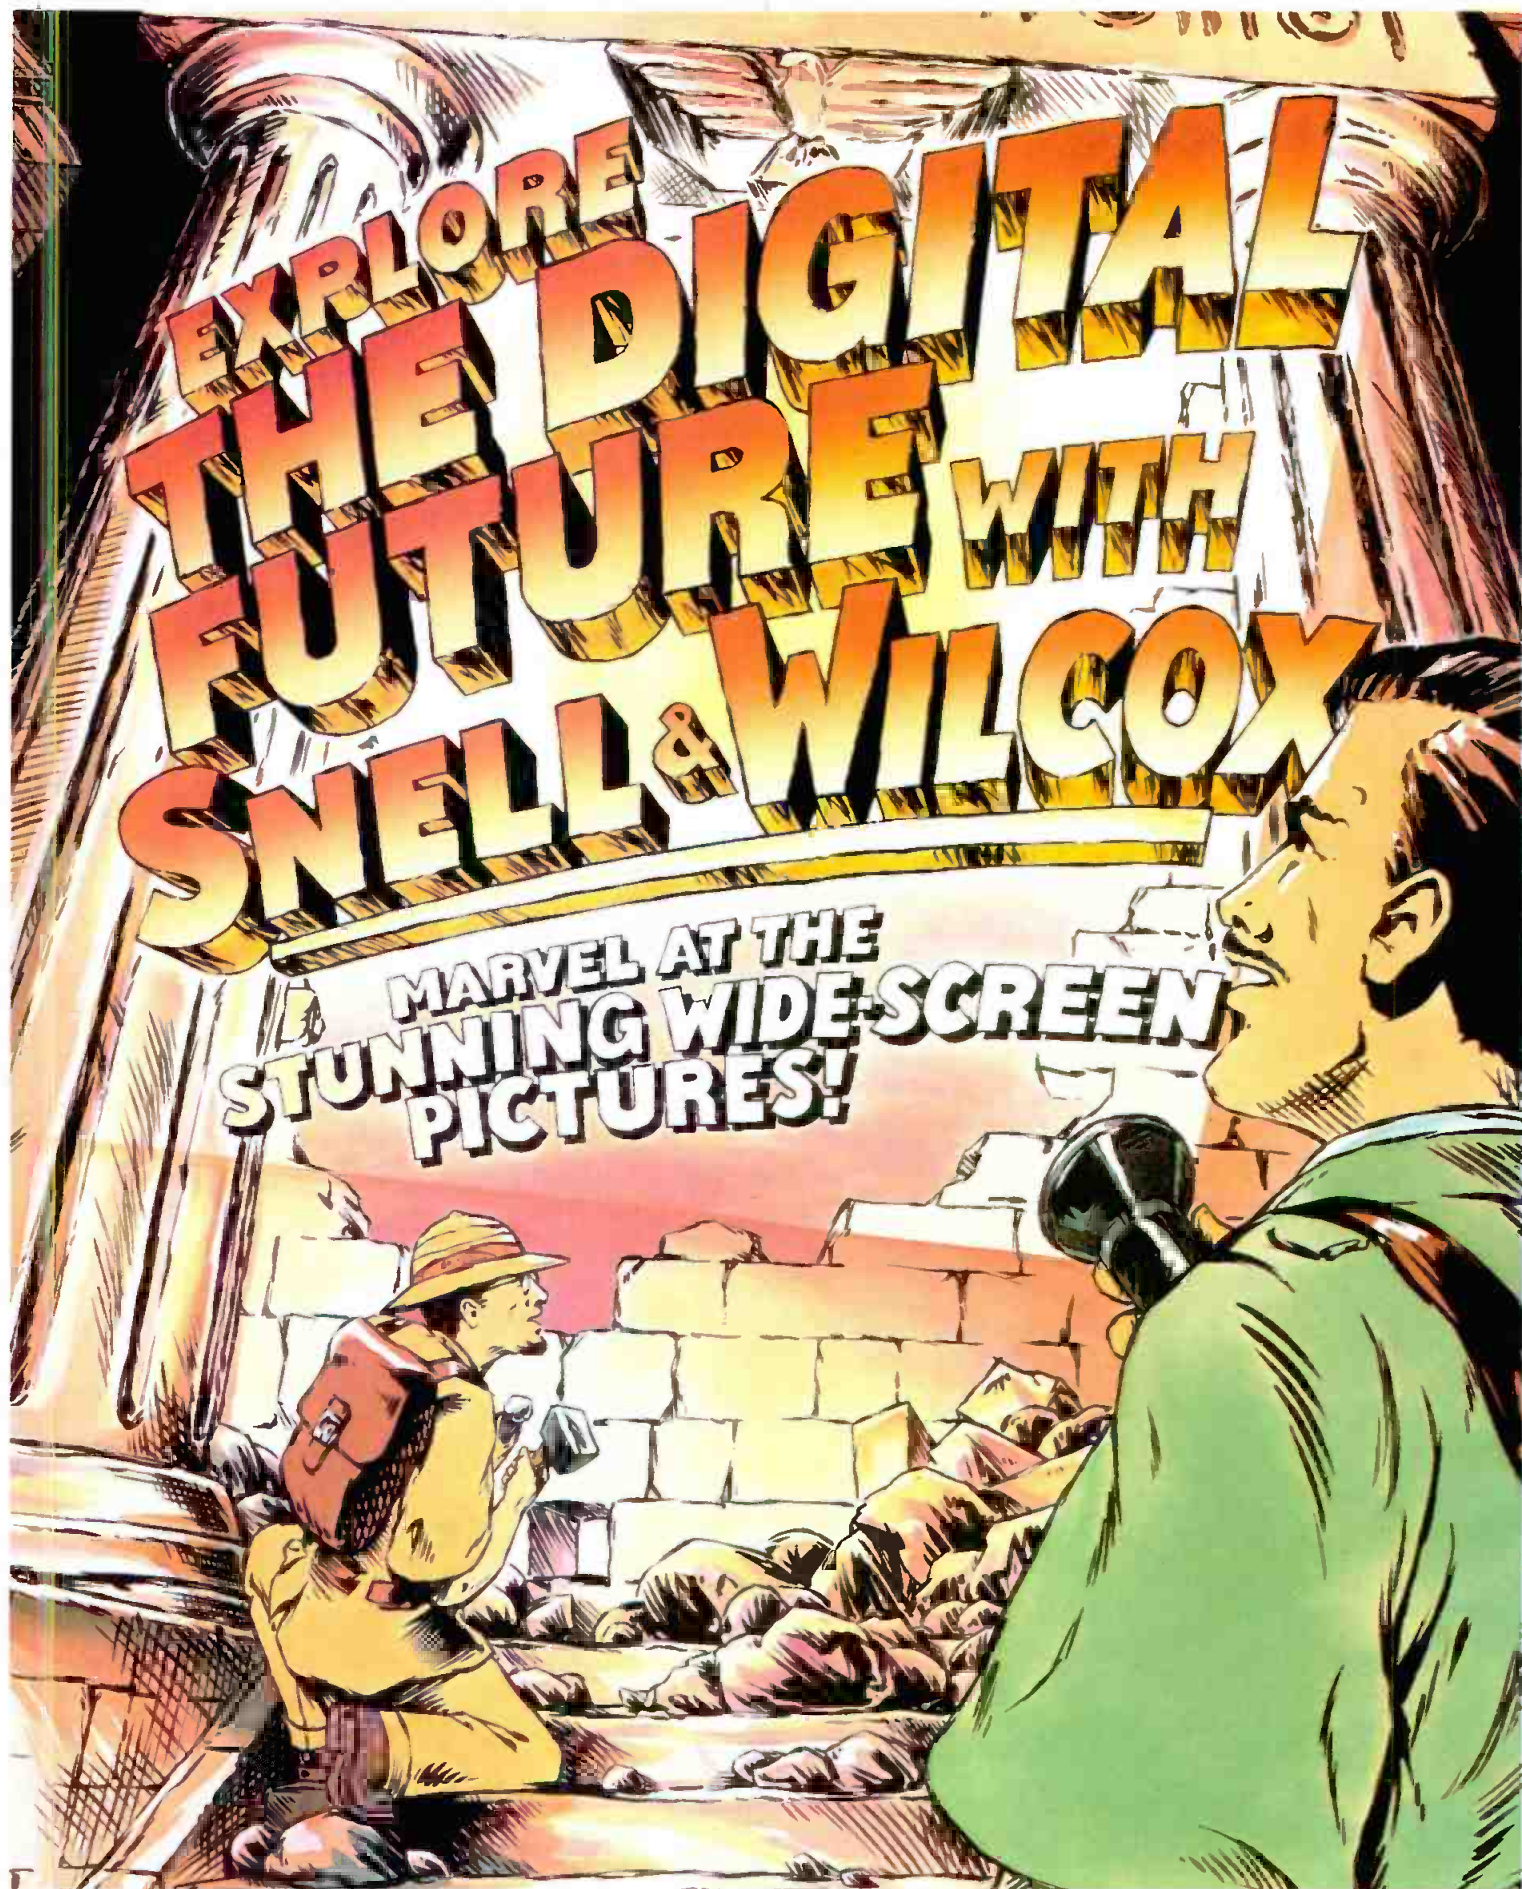

 **SNELL & WILCOX** 
Engineering with Vision

Circle (28) on Free Info Card

www.americanradiohistory.com

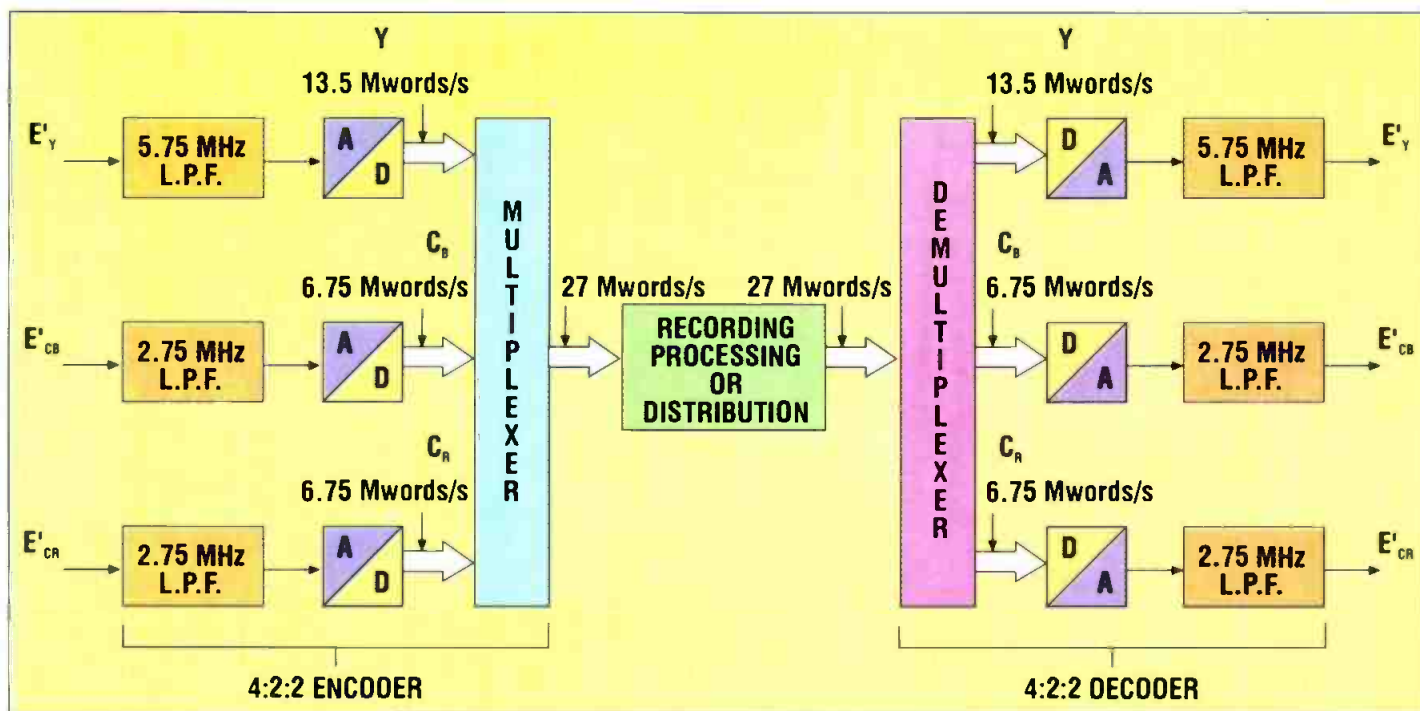


Figure 2. Simplified block diagram of 4:2:2 component digital system.

sampled. Digital levels 000, 001, 002, 003 and 3FC, 3FD, 3FE, 3FF are reserved to indicate timing references. The 700mV luminance signal occupies a range extending from blanking (64 decimal or 040 hexadecimal) to peak

white (940 decimal or 3AC hexadecimal). The bipolar ($\pm 350\text{mV}$) color-difference signals are shifted up by 350mV to fit the A/D converter that requires unipolar signals. They occupy a range extending from the digital equivalent

of the maximum negative level (64 decimal or 040 hexadecimal) to the digital equivalent of the maximum positive level (960 decimal or 3C0 hexadecimal). A small amount of bottom and top headroom allows for mis-adjusted or drifting analog component signal levels. Contemporary technologies have made available cost-competitive 10-bit 4:2:2 products, which offer improved SNR performance. (See Table 3.)


The component digital standard does not provide for the sampling of the analog sync pulses. The time-division-multiplexed 1,440 words per active line (720 Y words, 360 C_B words and 360 C_R words) are preceded and followed by four-word timing reference sequences (TRS) namely: start-of-active video (SAV) and end-of-active video (EAV). Each TRS consists of a four-word sequence. The hexadecimal levels of these words are, respectively, 3FF, 000, 000, XYZ. The first three words unambiguously identify the SAV and EAV sync information. Video data cannot assume these reserved levels. The XYZ word is variable and identifies the fields, as well as the state of vertical and horizontal blanking.

Some of the unused samples in the horizontal and vertical blanking intervals can be used to carry ancillary data, including up to 16 AES/EBU digital audio channels (eight stereo pairs), time-code, error detection and han-

GMS Introduces the

FIRST AND ONLY, TRULY PORTABLE, MULTIBAND MICROWAVE SYSTEM

At a fraction of the cost of the 3 radios it replaces



MODEL STM MULTIBAND LINK

HAVE THE RIGHT LINK... NO MATTER THE FREQUENCY ASSIGNED

-The standard model **STM** has the 2, 7 & 13 GHz bands in NTSC or PAL. The transmitter is frequency agile with power output levels of 3 W @ 2.0 GHz, 1.5 W @ 7 GHz and 200 mW at 13 GHz. Different bands and higher power available by special order!

-The unit is controlled by an integrated membrane switch with an LCD display or remotely through a standard RS-232 interface.

-The **STM** series' compact size, lightweight and very rugged construction allows maximum flexibility in applications from ENG to POV and hidden camera.

Global Microwave Systems manufactures a complete line of high quality, ruggedized and competitively priced microwave communications equipment.

Subminiature Transmitters - Miniature and Compact Receivers - RF Power and Low Noise Amplifiers - Antennas - Helicopter Antenna Actuators - GPS Controlled Directional Antenna Systems.

Contact **GMS** for solutions to your microwave link applications.


TEL- 760.631.8021 FAX- 760.631.8031
www.gmsinc.com gms@gmsinc.com

4141 Avenida de la Plata - Oceanside, CA 92056 USA



Circle (29) on Free Info Card

The second in a series of **DTV** updates from Comark.

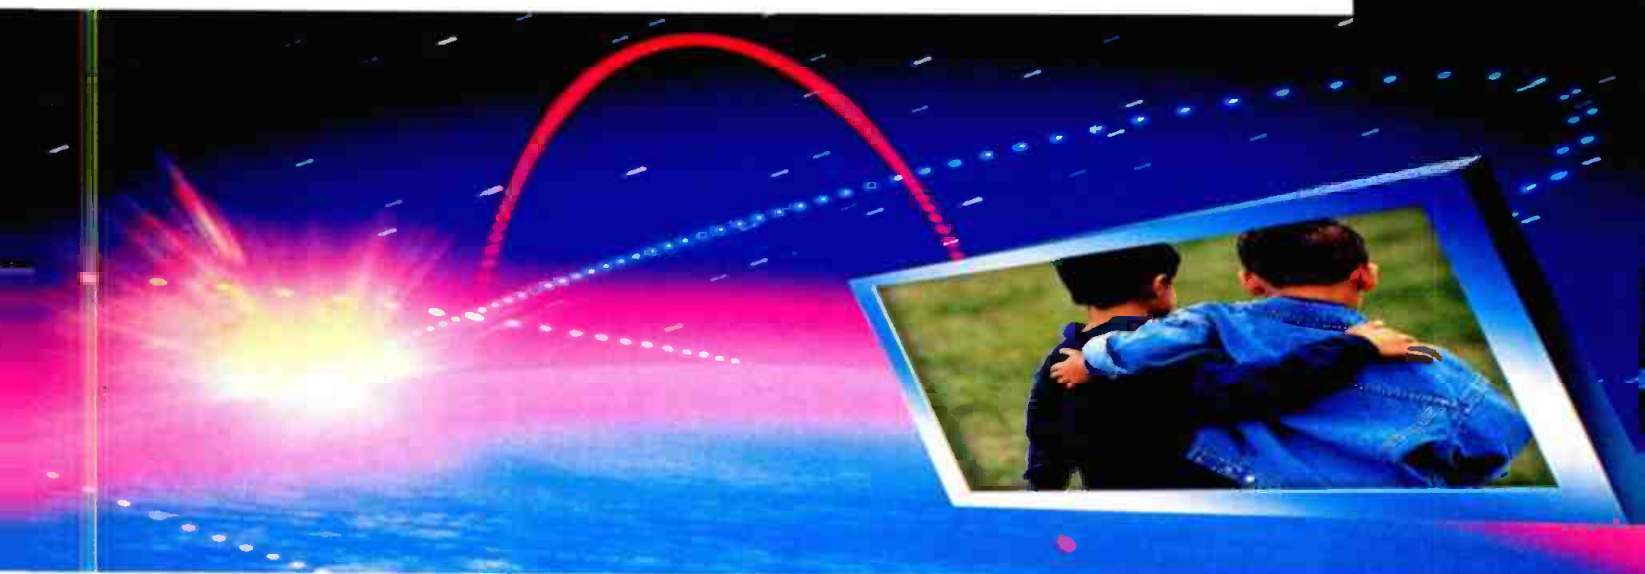

Why Comark should be your digital partner.

Only Comark has a complete family of products and services ready for the digital age. UHF and VHF. Tube and Solid State. High and Low power. Analog and Digital.



The IQX DUAL USE system, pioneered by Comark, broadcasts analog today and digital tomorrow.

It's happened—DigitalTV is here. To make a painless transition, you need more than a new transmitter—you need a strong systems partner.

Count on Comark. As the dominant UHF transmitter supplier and founding member of the DTV research team,

we're the only

company that can meet your requirements for the digital age. Whatever your needs, UHF or VHF, our systems are designed for ease of use, low cost maintenance and no-hassle installation.



Unparalleled quality and service.

Comark offers comprehensive installation, support and maintenance services—around the clock, and around the



The new Optimum line of VHF transmitters are the first VHF systems designed for all digital standards.

world. Based on an independent survey, Comark is consistently rated by broadcasters as having the best after sales support in the industry.



Shouldn't Comark be your digital partner?

Our vision is being shared. NBC, Paxson and several major groups have recently selected Comark to provide digital systems and engineering services to all of their owned-and-operated stations.

Want the answer? Get our free guide.

Call us today at (800) 688-3669 and see the innovative ways Comark can get you up to digital speed. Or you can request it via e-mail from erainey@comarkcom.com.



The AdvantageTV series of UHF transmitters was the first designed to meet the ATSC standard.



500 Horizon Drive • Suite 503 • Chalfont, PA 18914
TEL: (215) 822-0777 • FAX: (215) 822-9129
www.comarkcom.com



Emmy Award
Winner for
Engineering
Excellence

**Stay tuned for our third in a series of DTV updates,
a new suite of DTV Transitional Services.**

Circle (30) on Free Info Card

www.americanradiohistory.com

© 1997 Comark Communications, Inc.

dling (EDH) data and other types of information.

The system concept

Figure 2 shows a simplified block diagram of a 4:2:2 component digital system consisting of an encoder, a processor and a decoder. The encoder consists of three A/D converters. The data rate exiting the Y A/D converter is equal to 13.5Mwords/s. The data rate exiting each of the C_B and C_R A/D converters is equal to 6.75Mwords/s.

The three digital datastreams are time-division-multiplexed and transmitted sequentially (C_B , Y, C_R , Y...) resulting in a data rate of 27Mwords/s. The first three words (C_B , Y, C_R) refer to cosited

luminance and color-difference samples and the following word (Y) refers to the following luminance-only (isolated) sample. The first video data of each active line is C_B .

The decoder demultiplexes the 27Mwords/s data and recovers the analog component video signals. The "processor" function in Figure 2 may be a digital signal distribution channel, a videotape recorder or a digital production mixer. The bits of the digital words that describe the digital signal can be transmitted in a parallel arrangement using a shielded twisted 12-pair (balanced) cable and DB25 connectors. This type of digital signal distribution is adequate for short distanc-

es and simple point-to-point signal distribution patterns. The SMPTE 125M standard describes the 4:2:2 bit-parallel digital interface. Parallel interconnections have been largely superseded by bit-serial implementations. Serial connections use standard 75 Ω coaxial cable and BNC connectors, which are more practical in large installations. SMPTE 259M standard describes the 10-bit serial digital interface. ■

Michael Robin, former engineer with the Canadian Broadcasting Corporation engineering headquarters, is an independent broadcast consultant in Montreal, Canada. He is a co-author of "Digital Television Fundamentals," published by McGraw-Hill.

Computers & Networks

Networking basics

BY BRAD GILMER



Brad Gilmer

Let's say you are facing the task of installing your first network. What are the steps involved? What are the choices you face? This month's article can help get you started down a new road that is educational and interesting.

Basic decisions

Here are some things to consider:

- Did you purchase a system that requires a network to operate? Or do you have to interface to existing networks or networkable equipment? If so, many of the decisions may have already been made for you.
- How many users will be connected to the network at any given time?
- Does the system use proprietary hardware or non-standard protocols?
- Are you strapped for cash so that you must make a minimal investment or do

you have the luxury of building a basic infrastructure that can be expanded at a later date?

- What is the maximum physical distance separating network devices?

Establishing a cabling method

Once you can answer those questions, you can start to establish a topology and decide on a protocol for your network. Over the last five years, networking technology has seen several different topology methods come and go. The ones that seem to have stuck are 10BaseT and Thinnet.

10BaseT uses unshielded twisted pair (UTP) cable and a "hub-and-spoke" topology. UTP cable is similar to telephone cable with one notable exception — the twist-per-foot is carefully controlled. In these applications, UTP

is actually a transmission line and the twist-per-foot is critical to the cable's performance. Other parameters are also closely controlled, but twist is the most important. The cable has a low cost-per-foot, is easy to install and can be installed by most telephone installers using similar tools.

In systems that use hub-and-spoke topology, all desktop cable runs return to a central hub or concentrator. The hub serves as a central connecting point for all devices on the network. When you draw out these systems, they tend to resemble a wagon wheel, with the hub at the center and the desktop computers at the ends of the spokes. In the past, the cost of hubs made this topology prohibitive for small installations. Today, 12-port hubs can be purchased for around \$75 to \$100 each.



When wiring 10 Base-T Ethernet connections, only two pairs of conductors are needed. One pair connects pins 1 & 2, the other pair is for pins 3 & 6. However, cabling for network applications typically has four pairs. Standard connections are shown, the T568A configuration is preferred, and directly compatible with two-pair voice and token-ring systems using six-position connectors. The T568B method is optional and directly compatible with AT&T phone systems.

NETWORKABLE

EXPANDABLE

BULLETPROOF



*MediaStream
Broadcast Server*



Looking for a broadcast server to get you on air today—and keep you there? You should give the HP MediaStream broadcast server a shot.

Our bulletproof architecture is engineered to maximize dependability today. And minimize problems adapting to a changing industry. A single server provides 6 channels and nearly 50 hours of storage. And HP servers can be easily networked—allowing you to add even more channels and storage as you go. Plus, our open-systems approach ensures compatibility with a wide variety of third-party hardware and software vendors.

Combine all that with HP's 24-hour service and support, and you're looking at the most reliable server money can buy.

But don't just take our word for it. Ask the

engineers at KCRA in Sacramento. Or MTV Europe in the U.K. Because from Arizona to South Africa, broadcasters around the world count on HP's broadcast server every day. And it hasn't let them down.

It's engineered to meet your broadcast needs well into the future. But at \$100,000, it's priced to fit your budget today.

For free product literature with more information, call 1-800-FOR-HPTV, Ext. 1634 today. You'll find out what HP's broadcast server can bring to your station, both now and in the future.

If you're looking to invest in a server you can count on, take a look at the HP MediaStream broadcast server. Then give it your best shot.

There is a better way.

Starting at
\$100 K

©1997 Hewlett-Packard Co. TMV10617-1/BE



Circle (31) on Free Info Card

www.americanradiohistory.com

Thinnet (occasionally called 2BaseT) connects networked devices using RG-58 and BNC connectors. There is no central connection point — the cable runs from computer to computer. BNC “T” connectors are used to tap into the cable and plug into the back of the computer. It is important that the cable system have two and only two 50Ω terminators, one at each end. If you leave one end of a Thinnet system unterminated, or put terminations in the line along the way, you will create unpredictable (bad) results because of transmission line reflections.

Thinnet is great for small installations. All you need are a couple of BNC “T”s, two terminators, a roll of RG-58 and a handful of BNC connectors. However, there are a few problems with Thinnet that you should know about. First, you would think that because there is no central point, that Thinnet is more reliable than 10BaseT; this generally is not the case. Thinnet is a little bit like those inexpensive Christmas lights you fought with last year. The ones where when one bulb burns

out the whole string goes dark (even though the box says they won’t). In a Thinnet system, if the cable opens somewhere on the network, the whole thing goes down. With a 10BaseT system, if a cable opens or shorts on the way to a desktop, only the device at the end of the cable is affected. Second, in the TV environment, it is easy to substitute RG-59 for RG-58 and 75Ω terminators for 50Ω terminators. Building a Thinnet system based on 75Ω components is possible, but as you enlarge the system, it will fail. Do yourself a favor and start with 50Ω components.

Establishing a protocol

Protocols are basically the languages that computers use to communicate with each other across the network. If you purchased a complete system from a vendor (for example a CG system with desktop connectivity) the vendor may have already selected a protocol for you. If you are a beginner, it is probably best if you stick with what they have selected. If you are starting out fresh, you may have the freedom to

choose the protocol that best fits your needs. If you are trying to communicate with a server, you will have to run the same protocol as the server.

I like TCP/IP for most applications. It is almost universally supported, it is the basis for the Internet, it can be routed over great distances, and it coexists well with other protocols. There are many other protocols available, including IPX/SPX and AppleTalk, but these protocols have not gained the nearly universal acceptance of TCP/IP.

This article has only covered a few of the basics of computer networking. You could devote your life and your career to the subject and never run out of material. If you have access to the Internet, there is a wealth of information available. Point your browser to any of the major search engines and type in the word ETHERNET. Next month we will look deeper into the subject of networks within broadcast facilities. ■

Brad Gilmer is president of Gilmer & Associates Inc., a technology and management firm.

Ask Dr. Digital

BY STEVE EPSTEIN

Welcome to the first issue of the new *Broadcast Engineering*, and welcome also the first “Ask Dr. Digital” column. *Broadcast Engineering’s* goal has always been to help you get your job done easier and more efficiently. With this new column, we are taking that concept one step further. Each month, Dr. Digital will take selected reader questions and problems and answer them.

If you are having a technical problem that you just can’t seem to get an answer to, maybe a camera that refuses to gen-lock or a misbehaving transmitter, let me know. For example, once I had a problem with a Chyron CG. All the letters made up of horizontal and vertical lines, the Es and Ts, looked fine, but those made up of curves and diagonal lines, the Os and Vs, had serious aliasing problems. I dug and dug and it

turned out that a flip-flop that was supposed to toggle each field wasn’t. Everything else seemed fine. Changing the gen-lock source eliminated the problem in the Chyron, but I still had to find the source. Later, in a darkened room (so I could see the dim trace), using the scope’s 10X expanded mode, I found it. The sync generator was no longer generating RS-170. The first full horizontal line in field 2 had a slight notch in the middle of it, making it appear somewhat like the last half line in field 1. From the Chyron’s viewpoint, the sync generator was sending out an endless stream of field 1s. For whatever reason, the Chyron was the only device sensitive enough to catch it.

If you have one of those technical headaches, send me a brief description

of what’s involved, what you’ve tried and the results. I’ll do a little digging and try to get you an answer. If a manufacturer is involved, let me know who you have talked

to, as well as their response. I can’t promise to fix all of the problems, but working for a magazine has its advantages. It’s amazing how easy it is to get some people’s attention (especially promotion and marketing managers) when you tell them

it’s *Broadcast Engineering* magazine calling.

Send your problems, questions and complaints to: dr_digital@intertec.com. Now, on to the first reader’s problem.



Meet the *new* company with *decades* of experience.



Once broadcasters looked to DMV (formerly the advanced products division of NTL) for compression, and News Datacom for conditional access. Now DMV and NDC have come together to create NDS.

Your one clear choice for digital broadcast solutions. Whether you're involved in contribution, distribution, digital terrestrial, private networks, or cable, NDS has everything you need to be successful.

NDS has already provided systems to leading broadcasters worldwide such as:
CBC, DIRECTV, EBU, Fox, Galaxy Latin America, NBC, PanAmSat, Reuters, and others.

Call NDS today. Because with NDS, the future of digital broadcasting never looked clearer.

NDS Americas Inc.
3501 Jamboree Road Suite 200
Newport Beach, CA 92660
714.725.2554

www.ndsworld.com

©1998 NDS America Inc. NDS, DMV, NTL and NDC are trademarks of NDS. All other trademarks are the property of their respective holders. All rights reserved.

Circle (32) on Free Info Card

www.americanradiohistory.com



A53 meltdown

Our A53-D melted down and we're having trouble getting Abekas to call us back. Do you have any suggestions on whom to call to obtain information on the A53-D?

*Steve Kline, Production Manager
Catwalk Digital, Charlotte, NC*



You know, if the darned thing melted down, I'm not sure I'd want to power it up again. Next time, it may take the whole building with it. Did you know that

Abekas was bought by Scitex and is now called Scitex Digital Video (you can contact them at 650-599-5111; fax 650-369-4777; E-mail: info@scitexdv.com; www.scitexdv.com). I've dealt with Abekas (now Scitex) in the past and found them to be a pretty reasonable bunch. And, checking with a few buddies in the field confirmed that the Scitex customer service track record is pretty good. I called Evan Sirof, Scitex's marketing communications manager. He was also surprised to hear about customer service problems (aren't they all?). Shortly thereafter, Evan called to say there was no record of any request from anyone at Catwalk. However, he said that contact between Scitex and Catwalk had been established, and a board was on the way.

A few weeks later. . .

Thank you for your reply and assistance in helping us contact Scitex Digital Video. Once we established contact with the A53-D expert, the process of troubleshooting moved right along. The board the company shipped wasn't the answer, but the control panel that was shipped the next day was. The situation is now resolved. I appreciate you getting in the middle of it. I believe you really helped expedite the situation.

Steve Kline

See, it works! If you need a little help with a technical problem or manufacturer, send me an E-mail at dr_digital@intertec.com and I'll see what I can do.

Steve Epstein



If you've done any VTR maintenance, you know the transports can get filthy. It shouldn't be much of a surprise, because tape is comparable to 1500 or so grit sandpaper. After you run enough of that through a deck, it leaves its mark. In Sony's Betacam decks, after 10,000 hours or so, the capstan surfaces can develop a half-inch-high groove in the tape contact area.

Ultimately, the capstan assembly has to be replaced. Getting the assembly in and out isn't too time-consuming, but re-aligning the servo electronics take about two hours. After doing the first one, I decided to take the old capstan assembly apart and found that the groove in the shaft was far enough off-center that the shaft could be flipped over and the "bad" section was no longer in the tape path.

As it turns out, the shafts can be flipped and the assembly reused. Mak-

ing it even better, if the assemblies are reinstalled in the same decks, the servos don't need to be realigned.

If you want to try this experiment, first try it on an old one. The basic procedure is to first pull the assembly out of the machine. (See Figure 1.) Remove the one small screw holding on the plastic cover, then loosen the two set screws holding on the flywheel and remove the flywheel. Underneath, you will find three screws securing the shaft holder. Note the position of the shaft holder on the base (draw an outline around it with a scribe or pencil) and remove the three screws. At this point, the shaft holder can be removed from the base and the shaft can be driven out. Using a punch, carefully drive the capstan shaft out of the bottom of the holder.

With the capstan shaft out, check the location of the two "hands." The relative positions of the two bands need to be reversed. Take an old Betacam pinch roller and with a punch, drive the two bushings and the roller bearing out of the pinch roller. The bushings are the same size as the bands. Set one of the bushings on a vise leaving the jaws open wide enough

that you won't damage the capstan, tap the shaft to move the band up approximately 15mm. To move the other band, first take the other pinch roller bushing and with a hacksaw, cut out a section wide enough to slip the capstan through. Then, using the cutout bushing, move the other band up 15mm. Place the roller bearing on the other end and reassem-

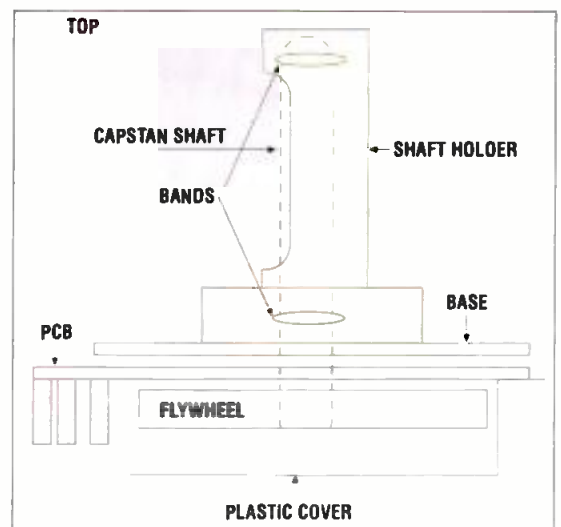



Figure 1: Sony BVW capstan and servo assembly.

ble. Make sure that there is no up and down movement of the shaft within the assembly. Adjust the bands if needed.

A quick check of the electronics and you're done! Let me know how it turns out, and save the pinch roller bushings for the next time! ■


COMPARE

Why risk your future with any other DTV transmitter company?

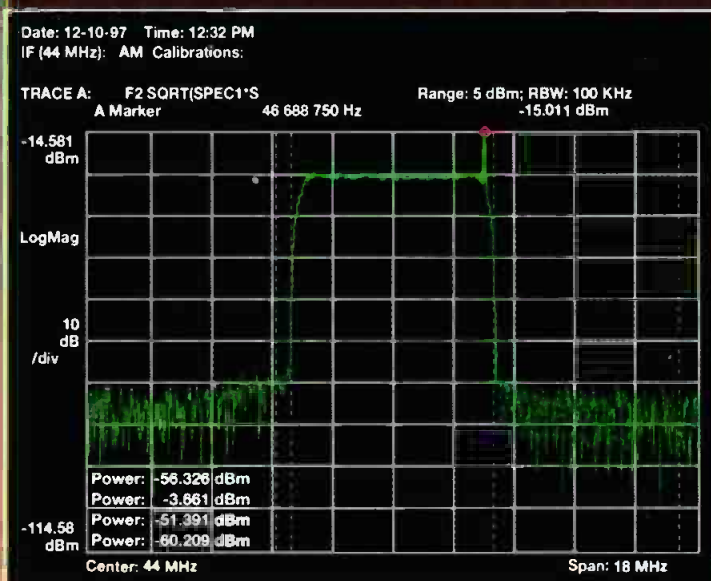

**ACRODYNE's DTV Modulator
IF Output**

52 dB down at the band edges.

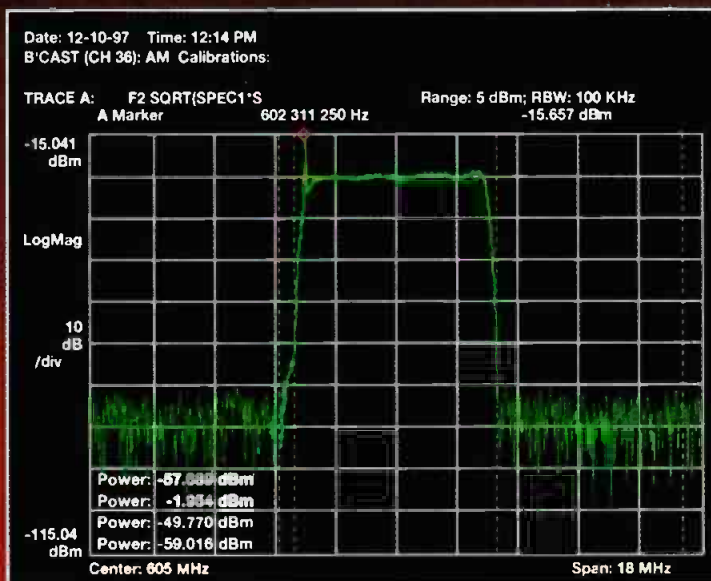

**ACRODYNE's AuD25D 25 kW
UHF DTV Transmitter Output**

50+ dB down at the band edges.
Count 'em! The rest is noise floor.

**The numbers PROVE the difference between
occupying one channel or three!**

We always knew that the Diacode® and Advanced Tetrode were good! We just didn't know *how* good. The answer to the out-of-band problem is obvious. Just look at the wave forms. It's too late to ask for an ACRODYNE transmitter after you've interfered with your neighbor.



Making the right decision in the first place is in your best interest. Can you afford to risk your DTV future with anything less than ACRODYNE performance?

Suddenly, the UHF TV band just got a lot less crowded! Visit us. See for yourself.

ACRODYNE

Leading Edge Television Transmitter Technology!

Acrodyne Industries, Inc. ■ 516 Township Line Road ■ Blue Bell, Pennsylvania 19422

Phone: 800-523-2596 / (215) 542-7000 ■ Fax: (215) 540-5837 ■ E-Mail: acrodyne@pond.com ■ www.acrodyne.com

© 1998 Acrodyne Industries, Inc. All rights reserved.

Circle (44) on Free Info Card

www.americanradiohistory.com

Transmission & Distribution

The box we call the DTV exciter

BY DON MARKLEY

Don
Markley



At Broadcast Engineering's November DTV conference in Chicago, the DTV transmitter was described by one speaker as a modem with a power amplifier. Although this tongue-in-cheek description caused laughter at first, it also made the attendees reflect and realize how much the industry is changing. Many (this author included), are still in awe over the performance of the SAW filter. Technology is changing at an alarming rate! New DTV exciters perform many new functions, albeit retaining some of the essential elements of the old. Relative to new DTV exciters, the operation of existing analog exciters seems simple.

Reviewing analog exciters briefly, the inputs are simple: audio and video and maybe some additional subsidiary signals. The signals, primarily the video, are processed somewhat to correct for

downstream errors. Simple amplitude modulation of the video portion is completed with the resulting signal filtered to obtain the familiar VSB signal. The audio signal is FM modulated on a frequency-controlled carrier and the resulting signal is either added to the VSB visual signal or maintained separately depending upon the type of amplifiers in use. The result is one or two TV signals operating on an intermediate set of frequencies. These signals are then upconverted to the desired channel and amplified sufficiently to drive the amplifier stages. Although this may have been considered complex, it pales in comparison to the new generation of exciters.

Basics

DTV exciter operation starts with an encoded 19.39Mb/s digital datastream.

The datastream contains all of the video, audio and data to be transmitted. The information is contained in 188-byte data packets. In many cases, for remotely located transmitters, the datastream will be best formed at the studio and sent to the transmitter on a digital STL. Although it may be possible to deliver the multitude of independent signals to the transmitter site separately, it is typically not preferable because of the bandwidth requirements of a baseband STL, as well as equipment such as the MPEG encoder that will then need to be located at the transmitter. Regardless of its location, the exciter itself will simply look for the input datastream.

As explained in prior issues (see "Understanding and Testing the 8VSB Signal," in the November 1997 issue), the exciter randomizes the signal and generates a usable flat spectrum that contains the necessary information. Failure to randomize the signal could create a transmitted signal which, depending on the input data, might cause unacceptable interference to existing NTSC stations. Look at it this way; without randomization, a condition such as loss of input data could cause the transmitted signal to exceed the acceptable envelope in much the same way that overmodulating an analog transmitter can cause spurious signals to cause interference over a wide piece of the band.


Once randomized, the data is then encoded using a method known as Reed-Solomon encoding. This stage includes the addition of error-correction signals to be used in the decoding process. The sync data is removed prior to encoding and new segment and field sync signals are added downstream from the encoder. The data is then multiplexed and the pilot signal is added. The resulting signal is then

FRAME GRAB

A look at the consumer side of DTV.

DTV & converter growth

Around 2001, two major events will combine to turn DTV sets into a small but vibrant market. First will be \$500 DTV sets and \$200 converter boxes, and second, the combination of widespread station build-outs and three years of network experimentation with DTV.

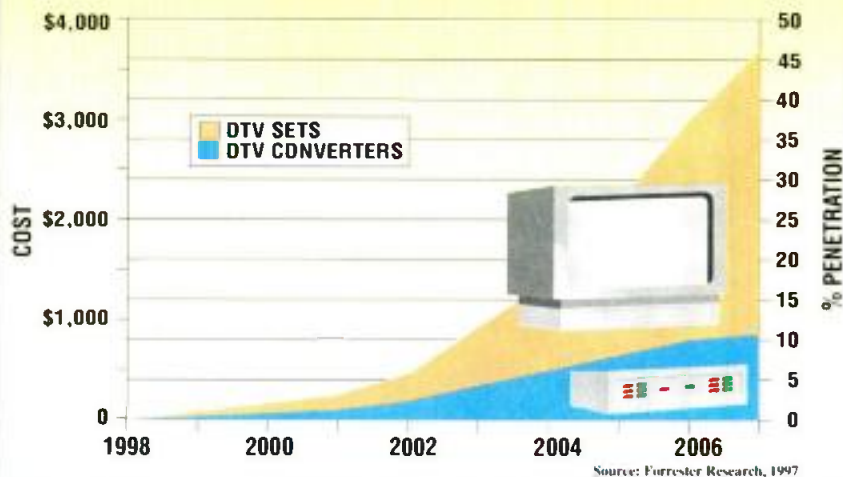

EASY PATCH

The Analog/Digital patch bays for today and tomorrow...from Neutrik®

Two choices to "wire up" Easy Patch for fast termination.



Heavy duty cable bar


Elco/Edac connections

Spring loaded terminal blocks

Metal shielding between ribbon cables top and bottom



Jumpers behind each jack allows switching into 1 of 6 configurations, even after installation.

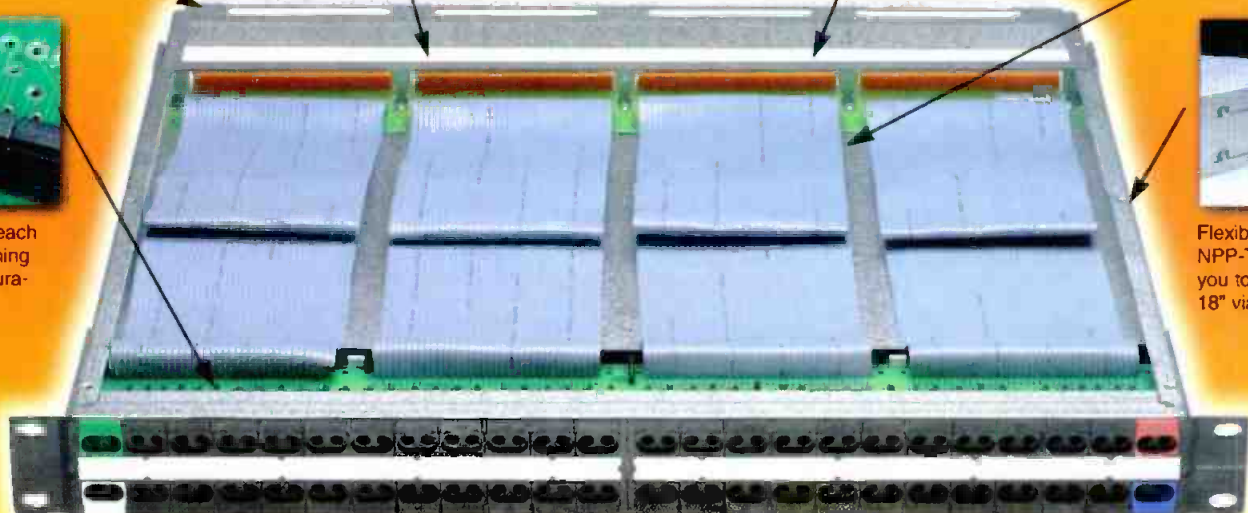

Flexible rack depth: NPP-TT/TB-14 allows you to go from 14" to 18" via built-in slider.

The Easy Patch series of easy to use patchbays eliminates signal degradation and offers excellent crosstalk performance required in today's broadcast facilities, mobile trucks, recording studios and audio installations.

Their analog/digital signal capability, reduced wiring time and quality workmanship are unmatched by competitors' patchbays.

The Easy Patch gives you features and options no other patchbay provides:

- Galvanized, heavy duty metal housing.
- Flexible depth from 14" to 18".
- Hard gold plated contacts designed specifically for A/D signals.
- Six jumper switching configurations.
- Ten color coded ID tabs - optional.

You asked for innovation, productivity and value in a patch bay series and Neutrik listened.

Demo Easy Patch for yourself. Call 732-901-9488 and ask for our NEW product guide and the name of your nearest Neutrik representative.

Neutrik... your one stop source for all your audio connector needs...today and tomorrow.



NPP-TT/TB at 7 1/2" depth with spring loaded terminal block connection.



NEUTRIK USA
CONNECTING THE WORLD

195 Lehigh Avenue, Lakewood, NJ 08701-4527
Phone: 732-901-9488 Fax: 732-901-9608
E-Mail: neutrikusa@aol.com Web Site: www.neutrikusa.com

Circle (39) on Free Info Card

www.americanradiohistory.com



RF COMPONENTS

- Transmission Line Rigid/HELIAX®
- Waveguide
- Filters/Combiners UHF/VHF



TV ANTENNAS

- UHF • LPTV
- VHF • Dual mode



FM ANTENNAS

- Side mounts
- Panels
- Combined Systems



PANEL ANTENNAS

- FM • UHF • VHF

When You Want More Than Just An Antenna



Made in USA since 1954

JAMPRO ANTENNAS/RF SYSTEMS, INC.

P.O. Box 292880

Sacramento, CA 95829 USA

Phone (916) 383-1177 • Fax (916) 383-1182

www.jampro.com • E-Mail: jampro@ns.net

HELIAX® is a registered trademark of Andrew Corporation

filtered and converted to an analog signal with high-speed digital-to-analog converters. Now, the DTV exciter starts to resemble analog exciters in that the resulting 44MHz IF signal is upconverted to the final operating frequency for driving the amplifier stages.

The big picture

An important point here is that the overall processing and filtering process must correct for errors in the amplifiers, transmission line system and antenna. To an even greater extent than in analog systems, the total transmission facil-



The Harris CD 1 8VSB DTV exciter.

ity must be treated as a complete system. Ideally, the amplifiers and antenna system would have a flat frequency response and group delay. There has been a lot of concern in the industry concerning group delay in waveguide runs and the combiners. This has been particularly true in attempting to deal with adjacent-channel NTSC and DTV systems. One manufacturer working on the worrisome N+1 combining problem has run into significant problems in group delay, which are considered to be beyond the normal correction capabilities of the exciter.

Despite this, it appears that a great deal of correction is possible in the exciters. This correction will compensate for errors that have been measured in the amplifier stages and combiners (N+1 excluded). This includes at least one system using an N-1 combiner. Transmitter manufacturers with whom this has been discussed all feel that enough equalization is possible to compensate for all anticipated problems in practical antenna systems.

In direct opposition to the gloom and doom that many have promulgated concerning DTV, it appears that the industry is rising to meet the challenge. Just as in the past, when technical problems have appeared to be beyond reasonable capabilities, transmitter designers come up with the equipment necessary to do the job. Sure, there will be more problems that will develop as DTV matures, but this writer sees the glass as more than half full, and expects to see all of those problems not only met, but beaten. Of course, I also liked both the Edsel and the Tucker. ■

Don Markley is the president of D. L. Markley and Associates, Peoria, IL.

Circle (40) on Free Info Card

Rising to Your DA Demands

MORE THAN A DA FRAME

You demand flexibility, and with Leitch's 6800 frame, you get Digital Glue functionality in a single DA frame. The 6800 houses an array of analog/digital DAs, providing you the flexibility you need and preparing you for the DTV future.

MOST POPULAR DIGITAL GLUE MODULES

ANALOG DISTRIBUTION

VDA-6830 Analog Video Distribution Amplifier
VEA-6830 Analog Video Equalizing Distribution Amplifier

DIGITAL VIDEO

VSD-6801 Serial Distribution Amplifier (143, 177, 270Mb/s)
VSE-6801 Serial Equalizing/Reclocking DA (43, 177, 270, 360Mb/s)
DEC-6801 NTSC/PAL to 4:2:2 Decoder
DES-6801 NTSC/PAL to 4:2:2 Decoder/Synchronizer
VFS-6801 Serial Input, Serial Output Frame Synchronizer
VSM-6804 Serial 4:2:2 Video Monitoring Encoder/DA for NTSC/PAL
ADC-6801 Component Analog to 4:2:2 Digital Converter
VCM-6801 4:2:2 to Component Analog Converter (Betacam compatible)
USM-6800 Universal Serial Monitor (Serial, NTSC, PAL, RGB, YUV, YC)
ENC-6801 4:2:2 to NTSC/PAL Encoder
VSR-4041 Serial Video 4x1 Routing Switcher Module

DIGITAL AUDIO

ADM-6800 Demultiplexer with SDI and AES Audio outputs
ASM-6804 Demultiplexer with Balanced Analog Audio outputs
AES-6880 AES/EBU Distribution Amplifier
ADC-6880-68C Analog Audio to AES/EBU Digital Converter
DAC-6880-69C AES/EBU Digital to Analog Audio Converter
DAR-6880 AES/EBU Digital Audio Reference and Tone Generator

TEST

EDH-6800-2 Error Detection and Handling Serial Distribution Amplifier
VTG-6801 4:2:2 Serial Test Signal Generator module

KEYERS & LOGO GENERATORS/INSERTERS

SAG-6800 Safe Area Generator/Inserter
VFS-6801 Serial 4:2:2 "Flash" Slide
VLS-6801 4:2:2 Logo Generator/Inserter
VDS-6801 Downstream Serial Keyer Module




Leitch is the long-time leader in analog DAs, offering you unmatched DA selection. Now, with our multifunction 6800 DA frame, cable-specific EQs and an unprecedented, one-day guarantee on four Leitch DAs, we're proving that even a leader can rise-up. Prepare for a bright digital future with Leitch and Digital Glue.

DAS IN-A-DAY!

Leitch has also risen to your delivery demands. Under our *DA-in-a-DAY!* program, you get up to one full tray of four of our popular DAs within one day from the time we receive your order. Order today from the below-listed DAs, and have them at your facility tomorrow!

ASD-880 Stereo Audio Distribution Amplifier
AMD-880 Mono Audio Distribution Amplifier
VEA-684 Video Equalizing Amplifier
VDA-683 Video Distribution Amplifier

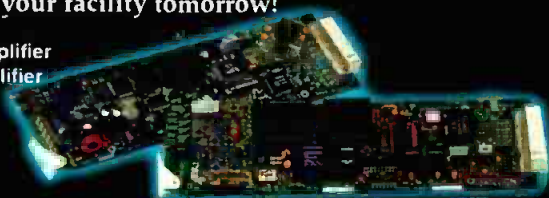

EQUALIZE ANY CABLE TYPE

Now all Leitch DAs can equalize most cable types, so you can customize any cable in your digital future. Just name your cable, and Leitch customizes the EQ to your match your cable.



LEITCH®

www.leitch.com

U.S.A.

(800) 231-9673

Canada

(800) 387-0233

Lately in audio post

BY DON BARTO

Have you ever caught yourself mixing as you edit or editing audio material without listening to it? Have you done any editing in fast forward (or fast rewind?) or how about multiplexing three or four projects at once?

At a crucial point in a difficult mixing job would you be willing to reconfigure the equipment in your control room to do an incoming ISDN voice-over session, complete with an on-site producer in the control room and a room full of clients sitting in on the session at another location in the country via a two-way phone patch? What if you were able to reconfigure it all instantaneously with a few keystrokes? And then, after doing a few long-distance edits, flutter effortlessly back into that original mixing job a minute or two

change the fundamentals of how engineers in audio post approach their work.

Serial tracks vs. parallel tracks


Many sound editors and mixers working in the audio-for-video field got their start in music studios. This discipline has always demanded dedication to the project at hand, tireless attention to production and technical details and a talent for skillfully and efficiently organizing the many sound elements that make up a project. This includes knowing where all the good takes are, and being able to hear and to selectively and effectively alter the simultaneous and the near-simultaneous components of those sounds.

In music and television, the serial or

As technology has increasingly provided and encouraged, the simultaneous or parallel nature of sound is the domain of the well-armed sound editor and mixer. Mixing consoles have evolved from suitcase size in the 1940s, to the concert grand-size versions in use today. First, there was inch-wide recording tape, then two inch; 16 tracks, 24, 48, and even pairs of 48 tracks rolling in sync together. Conventional wisdom tells us that the only valid way to control complex sound events is to deconstruct them into discrete elements and then arrange those elements vertically (and logically) across a wide piece of tape where they can be presented horizontally across the many input modules of a mixing console.

So, after more than 20 years of tackling most of my mix and sound design problems through parallel track building, it seemed natural for me when the 240-channel digital audio workstation was hoisted into my control room, to spend a couple of years using it to build virtual versions of what I had been doing previously on multitrack tape. Though it was happening much faster and more smoothly, I was basically doing the same things I had always done; meticulously breaking out related sound elements onto their own tracks or groups of tracks — checkerboarded production tracks, narration, voice-over, A&B stereo music tracks, A&B stereo presence tracks and the rest for sound effects. I was making digital pictures of tape. That was the correct way to do it. Right?

It seemed right until I started getting more into the mix automation. The re-examination first started when I would need to put a stray mono sound effect onto a vacant spot on one side of a pair of stereo presence tracks. (Sometimes, I would even put the mono effect on both tracks, think-

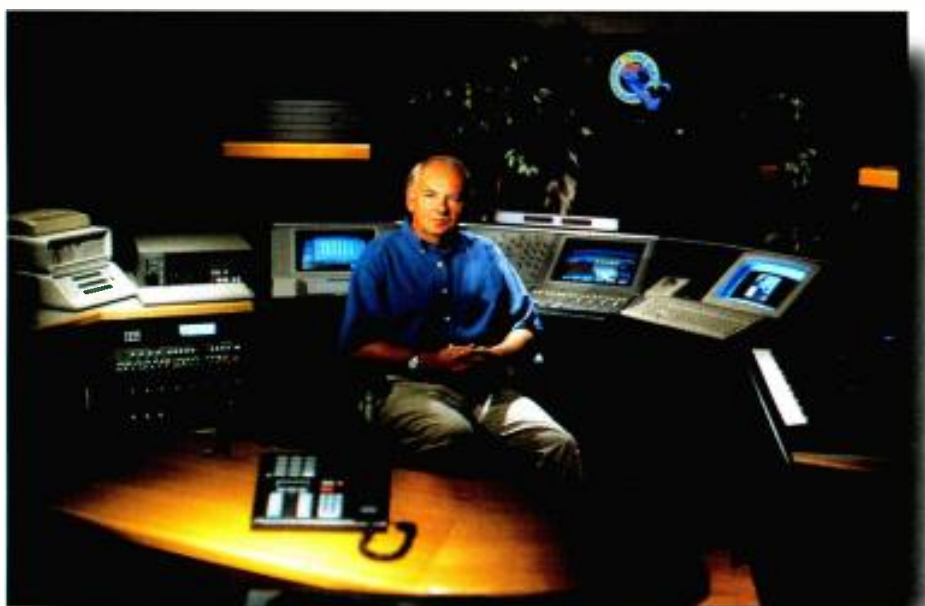

Don Barto, sound editor for Big Shot Productions, sitting in front of his digital audio workstation.

after disconnecting from the ISDN feed?

Sound far-fetched? Not really. Reckless? Not at all. Unorthodox? Definitely not. It's just that the latest generation of digital audio workstations has given us faster, more powerful tools to shape and manipulate sound, as well as

sequential structure of sound is usually a given for the sound person. Sequential structure is something that is dictated by the musician or by the sequence of events in a video scene, although it can be altered a little here and there with a razor blade or a time-code offset.

DBMAX

FIVE BAND DIGITAL BROADCAST MAXIMIZER



Maximize your footprint and get the impact you need with the cleanliness you deserve!

Years of research and experience in digital compression and limiting techniques for CD mastering have led TC Electronic to the development of the five-band DBMAX processor.

The DBMAX was brought to life in close cooperation with chief engineers at broadcast facilities world-wide,

resulting in a powerful broadcasting tool, that easily interfaces with all analog and digital audio broadcast formats.

Used as a Transmission Processor, the DBMAX ensures a louder and more consistent signal, thereby enhancing the signal within the actual coverage area.

Better coverage means you get better ratings, which in turn makes the DBMAX a sound investment!

The DBMAX doubles as a great Production Tool at all resolutions and sample rates, offering optimized program material without the sacrifice of sound quality.

Radio, TV & Film Post Optimizer:

- ◆ Ultimate mastering processing: Louder, crisper, warmer, punchier, more subtle, more spectrally-balanced production
- ◆ 5-band Eq, Dynamic filtering of spot/trouble frequencies, 0 or 90 degree mono summing, MS-decoder etc
- ◆ AES/EBU I/O and sync-input as well as 24 bit AD and DA-converters
- ◆ Full 24 kHz audio bandwidth at 48 kHz sampling frequency


Transmission Processor:

- ◆ Transparent 5-band on-air dynamics processing
- ◆ Presets available for DAB, FM and AM transmission
 - all pre-programmed and easy to set up
- ◆ Simultaneous AGC, Compressor, Limiter and Soft Clipper
- ◆ Enhanced signal within the broadcast coverage area
- ◆ Various versatile OB-tools (for unattended operation etc)

The DBMAX allows transmission-settings to be copied to the production suites, enabling engineers with a DBMAX to listen to the final transmitted signal during the production phase. For easy transfer and back-up of these transmission settings we've equipped the DBMAX with a PCMCIA-slot.

Finally you can be confident your listeners receive the signal you intended them to!

Put Yourself in the Place of Your Listener

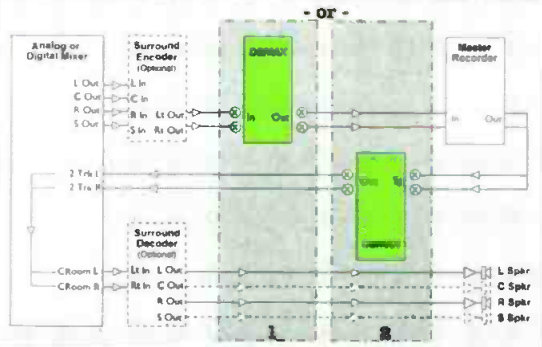

TV or Radio Production & Transmission Emulation

Example of production for DAB, Digital TV and FM

- 1) Production: DBMAX inserted pre-master to optimize production.
- 2) TX Emulation: DBMAX inserted post-master for transmission emulation

t.c. electronic
ULTIMATE SOUND MACHINES



TC ELECTRONIC INC., 790-H HAMPSHIRE ROAD, WESTLAKE VILLAGE, CA 91361, USA · PHONE: (805) 373 1828 · FAX: (805) 379 2648
EMAIL: INFOUS@TCELECTRONIC.COM · HTTP://WWW.TCELECTRONIC.COM/DBMAX

TC ELECTRONIC A/S, SINDALSVEJ 34, DK-8240 RISSKOV, DENMARK · PHONE: + 45 8621 7599 · FAX: + 45 8621 7598

Circle (42) on Free Info Card

www.americanradiohistory.com

ing this would somehow make it all right.) As much as I felt I was doing something wrong, the pan pot automation could easily deal with the minor indiscretion. And it did not cause any grief when I had to lay off a surprise M&E mix either.

This approach shifted into a higher gear when I started taking advantage of the powerful real-time dynamic equalization and dynamics processing capabilities of my workstation. I stopped routinely checkerboarding my dialog tracks because I felt comfortable using my mix automation to rifle through the necessary level, EQ and dynamics changes. It made it possible for me to effectively control extremely complicated mix moves sequentially. I was able to zip through projects tackling just about anything in a head-on, serial fashion. I was still affecting the mix in much the same manner as before, but the mode of visual presentation and thinking had changed.

Now, when playing back a mix, my console sometimes looks like a pinball machine, with faders, pan pots, aux sends, equalizer and dynamics indicators ripping and racing around — doing the same sort of processing as before, but applying it in a more sequential manner, concentrated on a much smaller number of tracks. The mix sounds much like my previous parallel constructions, but I'm not working as hard or as long. Of course, I still do a lot of editing, but the difference is that the organization is more fluid and I start mixing much sooner. In fact, sometimes I start mixing first.

Mix first, then edit?

Well, not mixing mixing, it's just that my workstation lets me start to rough-in and save some of my initial mix impressions as I'm editing. Previously, many of us would approach sound editing and mixing as separate operations. If you wanted to drive a sound mixer nuts, all you had to do was ask him or her to recut some narration in the middle of a mix session or to add a boat horn or more seagulls. Now, the distinction between editing and mixing is starting to blur and it's because digital audio workstations are making it practical and desirable.

When editing, it makes good sense to set initial trim and pan settings and tackle needed EQ and dynamics adjustments as they are encountered. Also scope out what the overall dynamic range of the program needs to allow for. Have you ever been faced with deciding whether to live with a puny-sounding sequence that is supposed to be big and pounding and explosive, but you ran out of headroom? Should you pull the program master down or would it be best to just start the mix from the top again?

When editing, it makes good sense to set initial trim and pan settings and tackle needed EQ and dynamics adjustments as they are encountered.

And conversely, now we can painlessly edit in mix mode — it's never a problem again, because of the equipment (be sure to save the mix prior to re-editing something — faders can get jostled around when we're not careful). The editing capabilities of these workstations have spoiled me so much that I have been catching myself topping and tailing and removing breaths from dialog clips in fast forward. Sometimes, I do it visually based on the waveform display. I seldom listen to edits when I'm looping presence. I know there will be opportunities to check everything out and correct as necessary as I mix. It makes the sessions fly by. And speaking of sessions, what about that ISDN nightmare scenario I mentioned earlier?

Project data

Moving confidently and effortlessly from a mix session to an ISDN session is made possible through project data. Project data encompasses all signal

paths, gains, signal-processing choices, automation — everything. Project data was intended to be the means by which mix automation and the necessary console configuration for a specific mix could be reliably and conveniently stored and recalled.

Customarily, there is a default project that is designed for each specific studio, taking into account the peripheral equipment that is connected to the system and the preferences of the operator(s). Recalling this default configuration takes about half a minute and takes everything in the system to the point where you would want it to be to begin a new project. Loading a previously completed project would configure the system to play back an existing mix and re-perform the mix from original mix elements.

Projects also can be defined and stored for later use that configure the system for anything, including the tricky two-way signal routing of an ISDN voice-over session or to record six feeds from my synthesizer rack, complete with the gains, panning and EQ. Now, when I get a last-minute call from scheduling to do an emergency ISDN session, my biggest concern is wondering if I'll be able to remember how to reset my stopwatch.

Project data lets me effortlessly multiplex many projects throughout a typical work day. Sometimes, I feel like an air traffic controller bouncing back and forth between the half a dozen or so projects that are usually sitting in my disk store, adding new elements as they come in-house, running mixes as they are needed, recording voice talent to pictures as they become available or as their lines are written.

The right tools make the job

As our medium and the industry continue to evolve, more and more of us will be using the kinds of tools we need to do the best job we can. And, we will continuously re-examine the way we are using them. ■

Don Barto is sound editor, mixer for Big Shot Productions, Baltimore.

**"These broadcasters needed
a CG solution.
Here's what
they found."**



Character
generator
for Win NT 4.0

INSCRIBER & DIGISUITE



Paul Doughty & David Munde

**"One of the main things for us
was that the CG is PC-based and
not proprietary."**

Inscriber & DigiSuite:
Broadcast CG, animation,
still store, and live titling
solutions on a powerful,
flexible platform.

"We looked carefully at the quality of the output. Inscriber was equivalent to anything out there. I'm happy with it and would buy another one. We are also satisfied with Matrox; they have a strong reputation, offer good web support, and seem to offer the whole package.

"Cost was also a factor in our decision. Inscriber and DigiSuite fill a void in the mid-range, offering good functionality at a reasonable price."

David F. Munde

DAVID MUNDEE • CHIEF ENGINEER
WCHS6/NBC • PORTLAND, MAINE



"We ran Inscriber through some tests and found it would accomplish the tasks we needed quickly and easily. The fact it was PC-based was also important for integrating files from other workstations in our network.

"Inscriber and DigiSuite met all our needs. The price was in our ballpark, and our editors have been very happy with the program."

Paul A. Doughty

PAUL DOUGHTY • DIRECTOR OF NEWS
WCHS6/NBC • PORTLAND, MAINE



inscriber
TECHNOLOGY

INSCRIBER IS A REGISTERED TRADEMARK AND CG-SUPREME AND CG-XTREME ARE TRADEMARKS OF INSCRIBER TECHNOLOGY CORPORATION. MATROX AND DIGISUITE ARE REGISTERED TRADEMARKS AND MATROX DIGIMIX IS A TRADEMARK OF MATROX ELECTRONIC SYSTEMS LTD. OTHER PRODUCT NAMES MENTIONED MAY BE REGISTERED TRADEMARKS OR TRADEMARKS OF THEIR RESPECTIVE COMPANIES.

Contact Inscriber for a free demo CD-ROM of Inscriber CG-Supreme.

FOR MORE INFORMATION ON INSCRIBER CG-SUPREME
please call 1.800.363.3400 or +1.519.570.9111, or visit our website at www.inscriber.com
Circle (33) on Free Info Card

www.americanradiohistory.com

SYSTEMS DESIGN SHOWCASE



On-air switching is done with the BTS Philips Saturn digital switcher. This switcher provides a path to automated, multichannel operations.

KCPQ goes all digital

BY GREG DOYLE

KCPQ FOX 13 entered the world of digital broadcasting with the launch of its new Seattle facility in September. Designed by the Sparling broadcast division, this facility incorporates component serial digital video and AES digital audio throughout. Sparling provided consulting, design and project management for the station's critical areas, including electrical power systems, telecommunication and data infrastructure, lighting and broadcast technical systems.

The Pacific Northwest has experienced rapid growth. This prompted KCPQ to leave its old analog facility and begin anew with an all-digital facility located near Lake Union in downtown Seattle. The building, originally a warehouse, underwent remodeling and upgrades, plus an addition of a third floor. KCPQ is now housed in a 72,000-square-foot TV station. Key technical elements of the facility — which provide a solid foundation for the coming DTV era — are the switching systems, DVE, camera and recording systems. All of these sys-

tems are capable of generating and recording component serial digital material in 16:9 format. By keeping the facility within the serial digital arena, a path to the future has been established as technology and DTV standards are more clearly defined.

Signal management

In modern facilities, one of the most important pieces of equipment is the routing matrix. KCPQ chose Philips Venus digital audio, video and RS-422 routing matrices. The present system is configured as 120x120 with room for expansion up to 160x160. The Philips Jupiter facility control system was chosen for router and machine control. Though challenging to program, the Jupiter control software provides a powerful, dynamic, virtual matrix control system. The Jupiter system is essentially a relational database that defines inputs and outputs to all switching matrices, keeping the facility in controlled orbit. In the technical center, a PC running Windows 95 is connected by Ethernet to a pair of Philips VM-3000 virtual ma-

trix system controllers in a redundant configuration. Updates or changes to system configuration are uploaded to the VM-3000 via the Ethernet. SI-3000 expansion serial interface units provide additional control panel ports and RS-422 machine control. These are assigned in the Jupiter configuration tables.

The air chain

Also connected to the Jupiter Ethernet is a Saturn master control switcher. Saturn has 16 direct source feeds with five additional inputs tied to the Venus router matrix. Feeds are assigned to Saturn with a unique label based on connection to Saturn's direct internal matrix or signals provided by the Venus matrix. Using careful signal management, it is possible to provide full access to any signal in the facility by assigning them to the Saturn input tables in Jupiter software, while still operating independently of the Venus router if desired. A Philips Mars 24x4 digital router is connected downstream of the Saturn for redundancy. All feeds associated with the Saturn master control switcher are

More than just a pretty face

Visual Time Lines for the hard of hearing

Large colour graphical display

Easy selection of effects and sequences

Joystick control for kids



Networking hard and floppy DOS disk drive for anoraks

Timeline editing and channel assignments

Numeric entry for the mathematically minded

Twiddly knobs for creative types

T-bar for time-positioning and coffee breaks

Charisma
VTL

The Charisma Ten "Visual Timeline" effects system breaks new ground in creativity for video effects editors. World renowned as the most powerful DVE, and with many hundreds of Charisma Ten channels already in use, the new Charisma Ten VTL system brings independent timeline event man-

agement and intuitive operations to a world weary of programming restrictions. Powerful network control enables channels and control panels to be shared and integrated with vision switchers and edit controllers, making Charisma Ten VTL the most flexible DVE system you've ever seen.

Charisma TEN offers no compromise:

10-Bit DVE with Defocus
Chroma Keyer
Colour Correction
Real-time Morphing
Integrated Mixer/Switchers
Versatile Warp Effects
CLEO 3-D Curved Effects
Flexible Channel Assignment
Live Background Keyer
Key Channel Shadows &
True Triple Channel Combiner

Circle (34) on Free Info Card

Video effects with charisma: crystal clear, and not at all devious. Call now for a demonstration.

QUESTTECH

...Effectively Ahead

Questech Limited, Eastheath Avenue, Wokingham, Berkshire RG41 2PP United Kingdom
Telephone: +44 (0) 118 978 7209 Fax: +44 (0) 118 979 4766 E-mail: sales@questech.co.uk <http://www.questech.co.uk>
Cintel Inc. 25358 Avenue Stanford, Valencia, CA 91355 Telephone: 805-294-2310 Fax: 805-294-1019
www.americanradiohistory.com

distributed to the Mars router.

Commercial insertion is done with a Hewlett-Packard Spot Bank automated server and long-format air-play from an Odetics TCS-90 LMS under Roswell automation control.

A Grass Valley Group 64x64 Horizon router — used in the analog facility — will continue to provide service in the new facility. The router, under Jupiter control, is used to create satellite pathfinding and monitor wall assignment in the production control room. A salvo can be written to assign monitors and tallies based on the type of production being done. Analog monitor feeds can become scarce in an all-digital facility. This was overcome in the KCPQ facility using Tekniche 6021M, 1x5 monitor DAs. The 6021M is able to provide five serial digital outputs or, by jumper selection, up to four of the outputs can be set to eight-bit composite analog output.

Analog to digital

All incoming NTSC analog feeds are pre-processed with Ross Truck Amp series equalization processors and then sent to the Horizon analog router. An output of the Horizon is fed back to satellite control analog scopes and QC monitors for assessment of analog audio and video. By selecting the incoming feeds at the satellite control location, quality and signal level adjustments are optimized prior to conversion to serial digital.

Satellite and inner-city fiber feeds are directed to Tekniche model 6017 ana-

log-to-digital decoders, 6060E frame synchronizers and 6024 stereo-to-AES decoders using a method called pathfinding. Satellite pathfinding is similar to telephone trunking systems. Presently, there are 16 incoming feeds received for archiving or direct-to-air broadcast. These feeds are sent to the analog router via the Ross Truck Amp processors. Eight outputs of the Horizon are then connected to eight Tekniche analog-to-digital decoders and digital frame synchronizers. The serial digital frame sync outputs are sent to Venus router inputs as pathfinding trunks. When a Venus output has selected one of the 16 satellite or incoming video feeds, Jupiter identifies the desired signal, finds an unused path through the eight Horizon pathfinder outputs, then directs the Venus output to select the pathfinder input the desired feed was assigned to, thus completing the path.

Digital to analog

Although the facility operates in the digital domain, the transmission path will remain analog. This digital-to-analog conversion is made just before leaving the facility on fiber. DS-3 fiber is used for the STL to Capitol Hill, east of downtown Seattle. The fiber feed is decoded and then transmitted by microwave across Puget Sound to the transmitter on Gold Mountain, west of Seattle.

Post-production

Production is built around a Quantel Clip Box server located in the technical

center and Panasonic D-5 serial component tape machines. The Clip Box provides eight hours of non-compressed or up to 40 hours of compressed CCIR-601 storage with eight SDI input/output (I/O) ports. Four of the I/O ports are dedicated to edit suites and three are used with a PC-based virtual controller.

There are three on-line edit suites using Quantel Edit Box 2000 editors and two off-line rooms, one of these using a Quantel News Box 200 and the other providing cuts-only, machine-to-machine editing. All edit suites share a Chyron Infinit! character generator by patching the keyboard and prompt monitors to individual suites as needed. Edit suites also share a Quantel Picture Box still-store. RS-422 keyboard control from the Picture Box is sent to users via the Venus RS-422 router matrix. When an edit suite user panel has selected the Picture Box, the keyboard control is captured by that station. This connection is not able to be reselected by another user until the first station has released the Picture Box. This provides a flexible use of equipment while protecting users from interruption.

Power systems: Be prepared

With computer server technology in mind, Sparling designed a power backup system providing a 750kW diesel generator and a 300kVA/240kW UPS. The UPS provides filtered, uninterrupted power to all technical and studio areas. In the event of a power failure, the UPS will keep all air-critical systems — including emergency HVAC — on-line until the generator comes up to speed.

Sparling's mission for the KCPQ project was to develop a framework for a flexible infrastructure to accommodate today's and tomorrow's broadcast technologies. Equipment was chosen and systems designed so that new technologies can be easily integrated — a consideration made especially important with DTV. ■

Greg Doyle can be contacted at 206-224-3622 or via E-mail at gld@sparling.com.

Editor's note: Tekniche standards conversion and format conversion equipment was inadvertently left out of the '98 Buyers Guide. For more information, call Tekniche at 888-TEKNICHE.

Design Team:

Architect: Callison Architecture
Electrical, Telecommunications & Broadcast Technical Systems: Sparling
Architectural Lighting: Candela, a division of Sparling

Studio Lighting: Strand Lighting
Mechanical: Holaday Parks
Construction: Sellen Construction
Equipment Acquisition: Digital Systems Technology

Equipment List:

Philips Jupiter facility control system; Philips Venus, 160x160 serial digital video, 160x120 AES audio and 32x32 RS-422 router switchers; Grass Valley Horizon, 64x64 analog audio, video router switcher; Philips Saturn, master control switcher; Philips Diamond 30, 2-M/E production switcher; Tekniche A/D, D/A and SDI distribution equipment; Questech Charisma TenX, three-channel DVE; Quantel 8-channel Clip Box; (3) Quantel Edit Boxes, on-line editors; (1) Quantel News Box, off-line editor; (3) Quantel Picture Boxes, still-store; (1) Quantel Hal, multilayer paint and animation editor; (1) Quantel Paint Box, graphics creation platform; Hewlett-Packard Spot Bank, commercial playback server; Odetics TCS-90, Roswell on-air automation; (3) Philips LDK-9 studio cameras; (24) Panasonic AJ-D580 VTRs; (11) Sony BVW-75 VTRs with CCIR-601 output; (3) Ampex VPR-6 1-inch VTRs; Tektronix, master sync generators, reference scopes; Nvision A/D, D/A and digital audio distribution; SSL Axiom 36-input mixing console; Yamaha O2R 24-input mixing console; (2) 360 Systems, Digicart & Instant Replay; Clearcom Base III, 50-channel Intercom matrix; Comscope/Gepco coax and audio digital cables

AES

DA's

A to D's

D to A's

Sample Rate
Converters

Mix Minus

Delays

Transmission
Protection
Switches

Reference
Generators

Synchronous/
Asynchronous
Routers from 8²
to 2048²

Time Code

Delays


Routers From
8 x 32 to 512²

Data

RS422 / 232
Routing

64 Port to
256 Port

Is the uncertainty of HDTV keeping you from buying the digital audio equipment you need today? Are you afraid that what you buy today will be obsolete tomorrow? **With NVISION you can buy now and buy with confidence, because these products are 100% HDTV compatible.** Each one is designed to perform in today's demanding environment as well as tomorrow's.

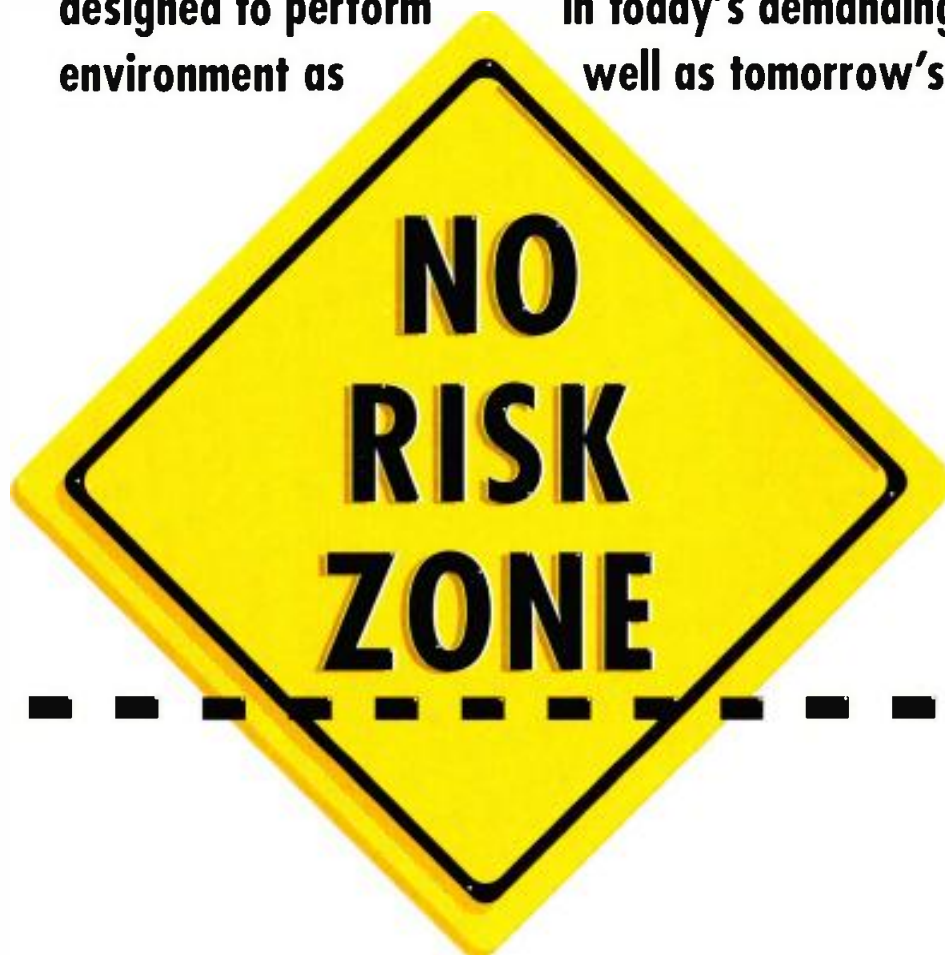

FR1000 2RU frame and power supply (with redundant option) - plug in any combination of up to 12 NV1000 Series modules



NV1035 Reference quality 20 bit AES A to D converter



NV1045 Reference quality 20 bit AES D to A converter



NV1025 AES DA with reclocking and EQ



NV1080 AES reference generator for efficient digital audio synchronization



NV3064SA Synchronous AES router 32² to 64² error-free, on-air digital audio

Circle (43) on Free Info Card

For more information on these and other high performance audio products, call us at 1-800-719-1900. www.nvision1.com

www.americanradiohistory.com

NVISION®

SYSTEMS DESIGN SHOWCASE



Betelgeuse editor Ed Givnish at edit room 6 with the Sony BVE-9100.

BUILDING AN EDIT SUITE IN LESS THAN 30 DAYS

BY GEORGE VELOSO

I am writing this article in my office at Betelgeuse Productions (pronounced "beetle-juice") surrounded by packing boxes, computer hardware, blueprints and circuitry. You see, I'll be moving my office down the hall over the next few days to make room for a new integrated multimedia and graphics room. Before I moved into my current location, my office had been located adjacent to the scheduling office and the editors lounge. That space, however, was needed to construct edit room 6, which is at the core of this story.

In the years that I have been with Betelgeuse, the company has expanded from four edit rooms and a staff of 35 to the current size of 22 post-production rooms and more than 80 people. Currently, the operation is spread over five floors in two different office buildings in mid-Manhattan, and if history is any indication, it is a safe bet that our most recent construction won't be our last. In fact, I am certain it won't, because tacked to my soon-to-be former office are the plans for further edit-room upgrades in April.

The bulk of the Betelgeuse client base consists of network sports producers whose work ranges from finished shows to program reformatting. We have been a lead post-production facility for the last several Olympic Games and are currently the exclusive U.S.-based edit facility for the CBS production of the Nagano Olympics. It was partly the commitment from CBS that led Betelgeuse to construct two new digital component edit suites. The consistent quality and workflow efficiency of digital component systems makes it an excellent

investment for high-end broadcast and post-production applications.


The Sony solution

In early August, Betelgeuse made the decision to become the first post-production facility in New York to construct a Sony digital component suite, and we agreed to make the two rooms mirror images of each other. The first suite (edit room 6) would be all new construction, while the second suite (edit room 1) would be installed in what had previously been a room with a Grass Valley digital switcher and Kaleidoscope. Because CBS had booked time in the first room for Sept. 16, only 30 days away, our challenge was at hand.

Integration is one of the industry buzzwords we hear time and again, yet, for Betelgeuse, it had dual meaning for the pending construction. Integration refers to Sony's system approach to edit suites — editor, switcher, DME, VTR all speaking the same language — as well as to the work of the company's System Integration Center (SIC) in managing edit suite installation from design through project completion. Typically, installations can take anywhere from 60 to 90 days, but we had to meet a much shorter deadline. All of the editing equipment is 4:3/16:9 switchable, which we believe is an essential investment for the near future.

Ergonomic design

My first task was to develop the plans for the two rooms.

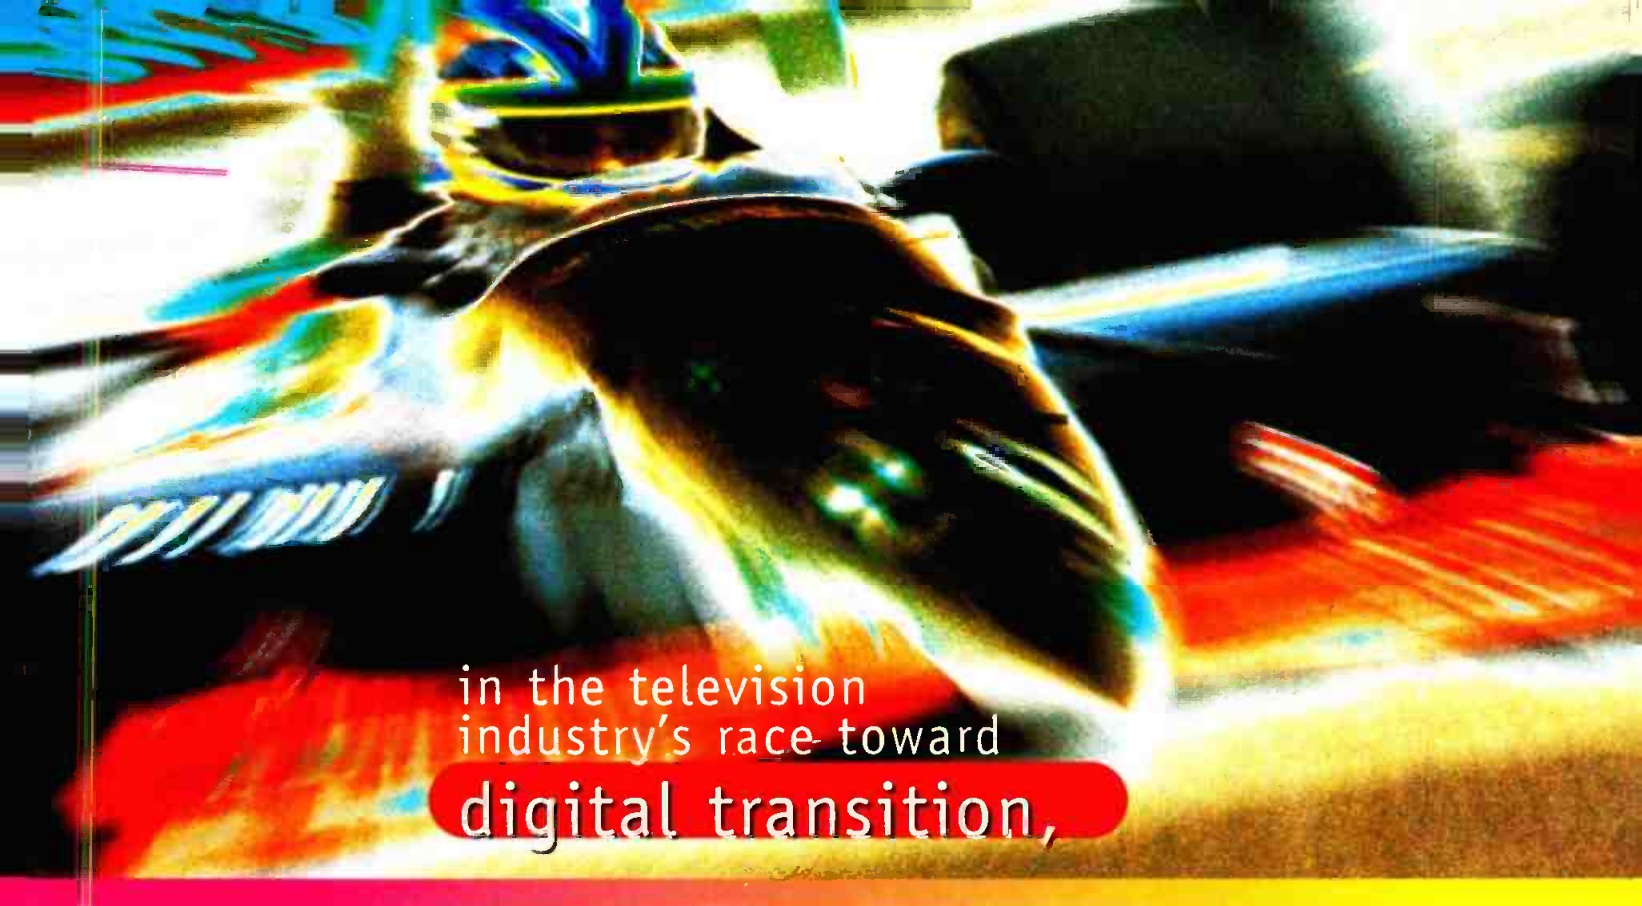

in the television
industry's race toward
digital transition,

think of us as your
c r a c k p i t c r e w .

Broadcast technology is on the fast track as stations across the country begin converting their technology to digital. If you're not on track for this important transition, the time to begin is now. And *Professional Communications Systems* is here with the tools to help.

Professional Communications Systems is a reliable, cost efficient source in the design and integration of today's digital technology. From turn-key studios for new television and cable operations, to up-grades for existing broadcast facilities.

Technology can be the difference between winning and losing. *Professional Communications Systems* will help you stay in front.

Technology Evolves. We Take You There.



PROFESSIONAL COMMUNICATIONS SYSTEMS

5426 Beaumont Center Blvd.
Tampa, FL 33634
(800) 447-4714

Circle (38) on Free Info Card

www.americanradiohistory.com

As any facility engineer knows, an essential consideration in design and construction are the elements needed to make the editor feel comfortable. Edit room design must not only optimize the features of the hardware and software, but it also must be sensitive to the human demands imposed on a work environment.

For instance, over the past few years there has been a noticeable shift in the relationship between producers and editors. The hierarchy that was once understood between them has been erased and inside the edit room, editors and producers are more like peers. That evolution is manifested physically in the desire of producers to sit alongside the editor and share in the intuitive feel for the effects that are being executed. Most editors are appreciative of the opportunity to work at the same level as the producer and that need had to be accommodated in the configuration of the editor, switcher, DME, character generator and the ergonomics of the console housing hardware for edit room 6. At the same time, the need of many of our sports producer clients to view isolation shots and make changes on the fly also necessitated creating a separate console with monitors elevated behind the edit area.

Our Olympic productions deadline meant that it was impossible to construct everything on site. However, we were able to trim days from the total construction schedule by completing all of the pre-wiring for the jack fields, switcher and DME at the Sony facility in San Jose, CA. The plan, which

worked well, was to complete all of the pre-assembly and system wiring in San Jose, then tear them down there and have the pieces shipped to us for on-site assembly. In edit room 1, we were able to work with about 80% of the existing cabling and the AC power system did not have to be changed.

The equipment arrived ready for installation on Sept. 2, and we had the

so much of the pre-wiring had been completed at the factory, our timetable for installation was met and everything was up and running on Sept. 16.

Of course, it would have been unwise to put our editors in the position of tackling a new room and facing a client without adequate training. In order to avoid that, we installed a temporary pre-fabricated Sony environment sys-

tem at Betelgeuse during the edit room 6 installation. This allowed us to train our editors on equipment that closely approximated the new room. The editors continue to get more comfortable with the system every day and the results have been good.

When it came time in October to construct edit room 1, the process was even more streamlined, and the actual on-site installation was completed in only four days. For businesses like



Betelgeuse president John Servidio (foreground), editor Jeff Wurtz (background) at work in edit room 6.

good fortune of spending Labor Day weekend dropping equipment into consoles constructed by Time Based Consoles. Additional A/D, D/A and D-2 to D-1 converters were needed to support the new room and integrate it into our existing D-2 and analog tape rooms. We soon began to understand what operational adjustments we would have to make to implement the new system software that would route all the audio and video functions through the BVE-9100 editor.

Fortunately, all of the needed equipment was available, except for the DVS-7250 switcher control panel. Because

ours, the hard lessons learned over the years can be applied to make the task of radical technological changes and reconstruction less daunting. We believe that working in close contact with a key supplier, in this case Sony, can only pay dividends for both parties.

Ultimately, the viewer is the final judge. Perhaps, when you are watching the athlete profiles from the Nagano Winter Games, you will see for yourself that delivering broadcast-quality material can indeed be produced in rapid fashion, with minimal heartache and optimal quality. Those are golden words for post-production facilities and their clients. Now, back to my drawings for the April upgrade. ■

George Veloso is vice president of engineering, Betelgeuse Productions, New York.

Editor's note: Tekniche standards conversion and format conversion equipment was inadvertently left out of the '98 Buyers Guide. For more information, call Tekniche at 888-TEKNICHE.

Equipment List:

Edit Rooms 1 & 6: Sony DVS-7250 switcher; BVE-9100 editor; DME-7000; DVW-A500 VTR; DVR-20 D2 VTR; BVM-20E1U program monitor; PVM-14M42 program monitor; Graham-Patten 820 audio board; Chyron Infinit!; Miranda Crystal converters; Tekniche D-2 to D-1 converter; Tektronix 601 i; 1740a WFM and 764 audio analyzer; Leitch DFS-3121 dual-channel still-store; Zaxcom TBC; Grass Valley video and audio D/A (edit 1); Ross video and audio D/A (edit 6); Urei 813 control room monitors and Spondor A500 monitors; Crown K1 audio amplifier

It Takes the Whole Team...



And score big in the digital age.

To win at the digital game, you've got to assemble your whole team—everyone from managers to engineers—and go to **NAB98**. With so much to see, do, hear and learn, every player counts as you map out your game plan at the most comprehensive broadcasting and e-media convention in the world! Start assigning your key players to test drive and learn about the latest technologies. Register now and enter the digital age like a Hall of Famer!

Don't turn this page until you've contacted us for more information!

- Visit www.nab.org/conventions/
- Call Fax-on-Demand at 732.544.2888
- Call 800.342.2460 or 202.775.4970

Spotlighting DTV—
in the sessions, on the exhibit floor
and at special events!

- Explore more than **1,300 exhibits** and uncover hundreds of new products that will change the rules of the game
- Examine critical issues that will lead your station to victory in more than **150 sessions** and workshops
- Take a look at the play books of the convergence markets to see how they impact your business




EXHIBITS: April 6–9, 1998 CONFERENCE: April 4–9, 1998

Las Vegas,
Nevada USA



Confidently making the transition from the editing room to the road, Sony's DVS-7000 Live Production Switcher is designed for the demanding pace and creative challenges of live production. Right from the start, operators will notice how comfortable they feel behind the wheel of the DVS-7000. Its 3.5 M/E control panel is like second nature to experienced technical directors. Its multiple downstream keyers and multiple

re-entry capabilities make it faster and simpler to layer graphics and DME moves into a show. And it shifts truck efficiency into high gear, by reducing the size and power consumption of its electronics—plus adding special mobile support features like redundant power supplies and advanced diagnostics. Sony has also created a revolutionary link between our DME effects system and our DVS-7000. It's called DME-Wipe

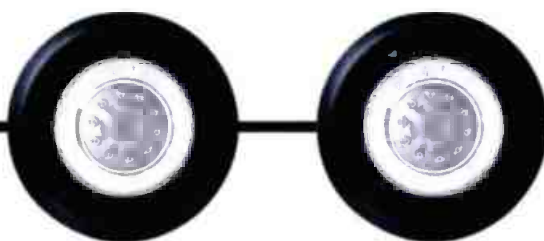




To create our live
digital switcher, we broke
down four walls
and added four wheels.

--and it adds keying power by turning DME's into additional keyers, freeing the M/E keyers for more key layers. TD's can now have a full range of powerful DME effects at their fingertips as quickly and easily as wipe patterns. In addition, it has three memory systems: Timeline effects, Snapshot memories, and E-File registers, making it extremely effective for quick changes in live telecasts or on-line editing. The DVS-7000 is

also designed for today's fast-changing TV station environment.

It can be configured for either analog or digital inputs. You can convert from digital composite to component 4:3/16:9 at the touch of a button. It handles 525/625 signals. And it's available in multiple control panel configurations. For more information, just call 1-800-635-SONY, ext. 7000. We'll help you get your show on the road.


SONY

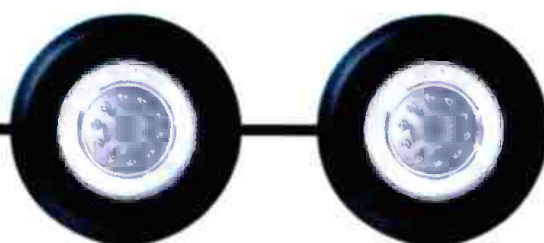

Remote broad



casting

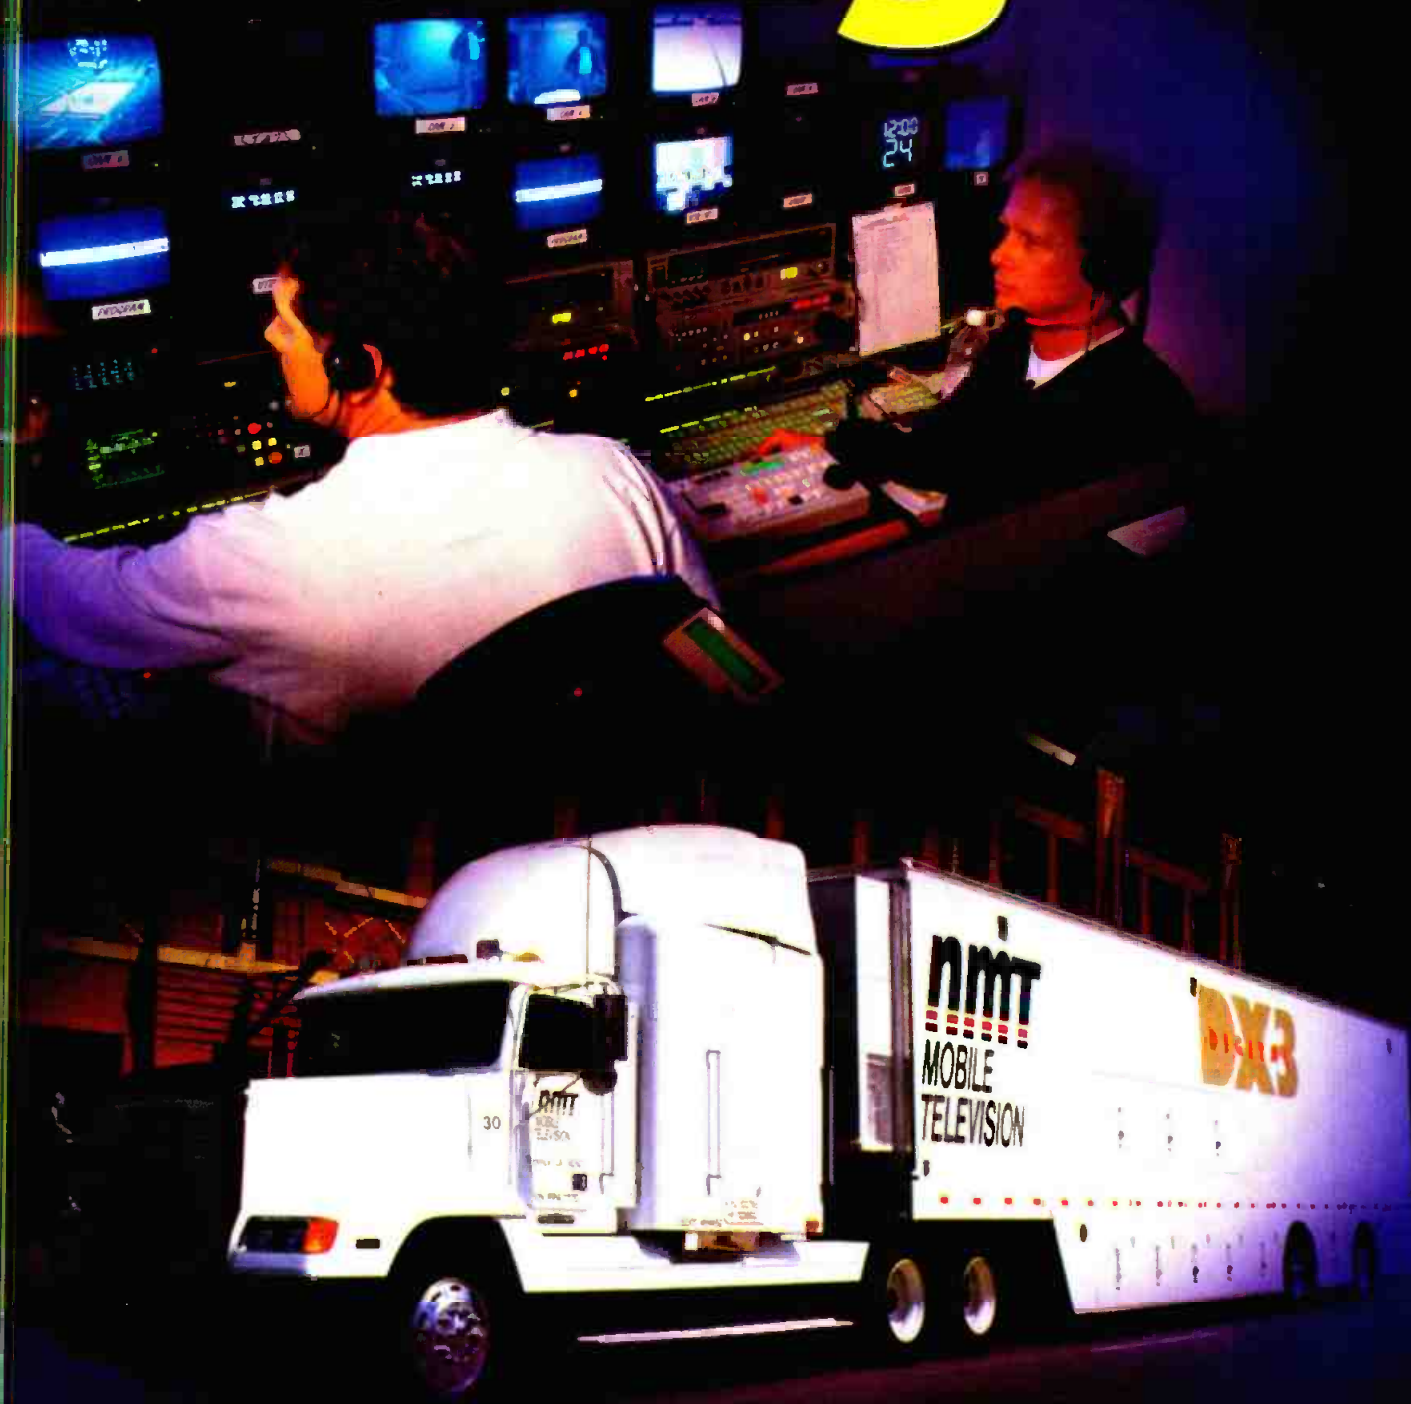


Digital links for sat trucks ... 78
BET builds new OBV 82
A history of remote broadcasting 86

DIGITAL LINKS FOR SAT TRUCKS

Compared to wideband devices of yesteryear, new narrowband and compressed equipment provide higher-quality video and audio.

By Peter Ludé

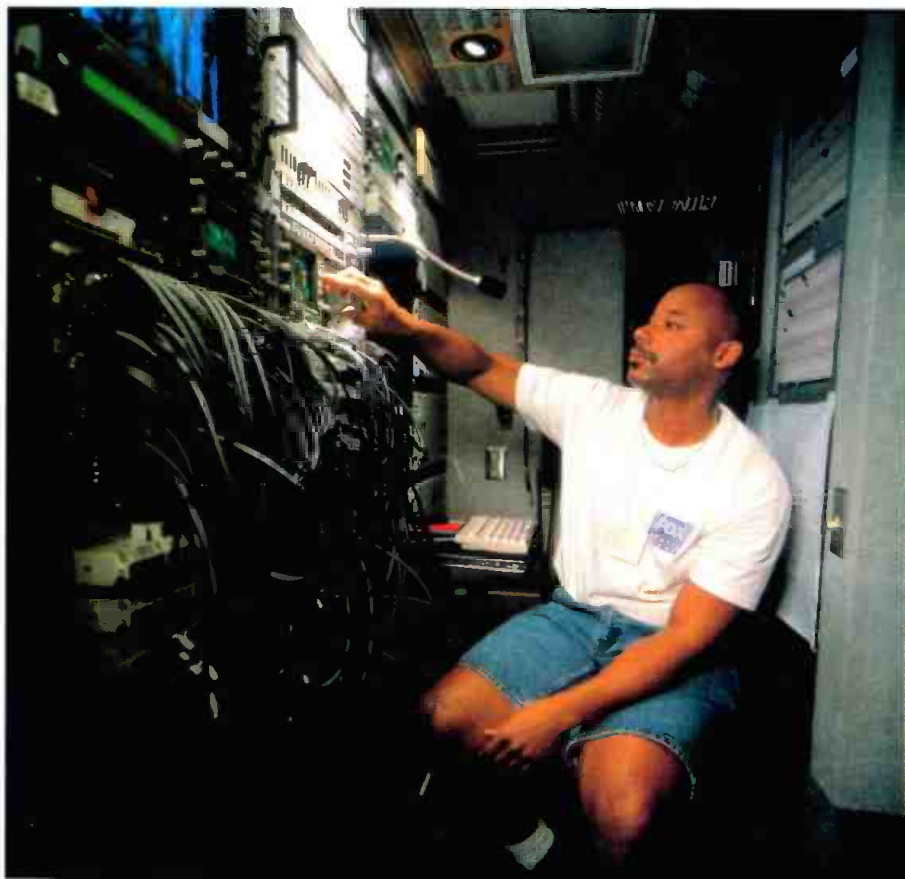

Interior of National Mobile Television DX4, built by Sony Electronics.

If you've been on a Ku-band satellite truck, you know the drill. The biggest story comes into the assignment desk at 3 p.m., and the event will hit late that afternoon. Of course, a live shot is absolutely necessary. And, the networks want a feed from the site. A quick check reveals the shoot is well beyond microwave range. By 3:15, the satellite truck lumbers out of the station and starts its long trek to the site. At 4:45, you and the truck arrive — just 15 minutes before the 5:00 newscast.

Having done this before, you know it is doable. You park the truck oriented so the dish can acquire the desired bird. Then, you lower the truck's stabilization jacks, start the generator, warm up the HPA, raise the dish, locate the satellite to be acquired and perform a crosspole in the process. If you are lucky, the satellite provider will auto-

matically provide you with your station's IFB at the right time, as well as instruct you when to illuminate the proper transponder.

If you've been there, you know it sounds naive on my part. A story of any notoriety is likely to turn into a Ku-truck convention, and transponder time is rapidly becoming a rare commodity. At the site, the first station photographer arrived 20 minutes ahead of you, and a second station photographer is now on the scene. Sure enough, a live shot with two cameras and four mics is now scheduled. To top it off, the first photographer has reappeared with 10 minutes of material to feed to the station, but there is only a five-minute satellite window available. It just doesn't get any worse — then it starts to rain.

To help lower your blood pressure during this "stress test," how about using a digital satellite path? No doubt

you have heard the praises of digital when it comes to preventing signal degradation through the transmission path. It can do that, and digital satellite news gathering (DSNG) has a few other tools that can help improve this scenario.

Digital satellite transmission

A new mindset is required to understand the digital transmission process. It helps to think of a digital video stream as data. In a transmission path this becomes imperative. Compared with a baseband signal, an RF satellite path can play havoc on a digital signal. Satellite transmission is comparable to telephone modems. Modems come with many standards, including those that define modulation methods and bandwidth. For digital transmission, the term baud rate also applies. The baud rate must be less than the channel bandwidth. Baud rate is also referred to as the symbol rate. A common misunderstanding is that baud rates and bits per second are synonymous — they are not. Modulation techniques allow more than one bit per symbol, which allows the bits/second rate to be higher than the baud rate. The same thing is true in a satellite channel.

There are far more things that can ruin satellite transmissions than telephone transmissions. One measure of a satellite link's health is a parameter called received carrier-to-noise (C/N). For digital satellite transmission, energy per bit vs. noise (E_b/N) is often stated instead. The difference between the transmitted E_b/N and the received E_b/N is known as the link margin.

Satellite transmission paths commonly have losses in the 200dB range. Uplink and satellite amps have gains in the range of 50dB to 70dB, and send and receive dishes have gains of 40dB to 50dB. With those numbers, there is not much room for unexpected degradation. Rain fades can subtract an additional 10dB on the uplink and/or downlink side of Ku transmissions. As

high a transmission effective isotropic radiated power (EIRP) as possible is needed, along with as high a receive signal and as low noise power as possible.

Relative to the received signal and noise, there is a parameter called antenna gain to system noise temperature ratio. A common figure for this is $>30\text{dB/K}$. Noise increases in northern

No doubt you have heard the praises of digital when it comes to preventing signal degradation through the transmission path.

latitudes as the dish is pointed closer to the horizon. Because of the increased angle, the atmospheric absorption of the signal increases and more of the noise radiated from the earth is picked up.

To eliminate some of the noise, Cassegrain feed systems are used. In these systems, the feedhorn points at the sky. Lower link margins can occur at the edges of the continental United States as satellite transmit/receive an-

Creating a component digital bitstream from analog video means that the signal no longer "fits" in a 6MHz terrestrial AM channel or an 18MHz FM half-satellite transponder channel.

tennas have more gain at the center of the mainland than near the northern and southern borders and the coasts. The difference can be as much as 6dB to 8dB.

Moving baseband video from analog to digital

Creating a component digital bitstream from analog video means that the signal no longer "fits" in a 6MHz terrestrial AM channel or an 18MHz

FM half-satellite transponder channel. The component signal requires several hundred megahertz of baseband bandwidth — at least 540MHz. Some form of digital compression, such as MPEG-2, also is needed.

Various MPEG-2 profiles and levels have been designed for a range of applications. The level aspect of MPEG-2 specifies the horizontal, vertical and temporal resolution, along with the resulting datastream's bit rate. The profile aspect of MPEG-2 describes the features available to keep the data rate within limits. Profiles allow for the decoding of I (interframe), P (predictive) or B (bidirectional predictive) frames and the luminance-to-chrominance ratio (4:2:2, 4:2:0, etc.).

Among the profiles and levels of the MPEG-2 compression algorithm are the contribution quality 4:2:2 Profile@Main Level (4:2:2 sampling with data rates from 1.5Mb/s to 50Mb/s) and Main Profile@Main Level (4:2:0 sampling with data rates of 1.5Mb/s to 15Mb/s).

With these bit rates, digital bitstreams can be "slotted" into today's satellite transponders. Transponder widths vary from 24MHz to 110MHz. Common sizes are 24MHz, 36MHz and 54MHz. The 110MHz transponders are two transponders with contiguous feeder link frequencies and with the same offset frequency feeding the same antenna or two similar antennas. However, as any SNG engineer knows, using a whole transponder is considered wasteful for almost all news operations, because there wouldn't be

enough transponder space if everyone did that.

For the trip to and from the satellite, analog video is frequency-modulated. Universal deviation rules for bandwidth use of those half transponders have never been standardized, their usage depended on the individual satellite operator. Peak deviation of $\pm 7.50\text{MHz}$ seems to be common, with normal white levels around $\pm 6.85\text{MHz}$.

DIGITAL LINKS FOR SAT TRUCKS

Today, some satellite operators are selling slices of a transponder even smaller than half a transponder. *Spectral occupancy* is based on where the skirts at the edges of the signal fall. One satellite operator considers occupancy to exist between the -26dBc (below peak carrier) falloff points. Satellites are a precious commodity. The cost of launching a satellite is in the \$50 to \$100 million range, with the cost of the bird rivaling the cost of its ride into space.

Efficient use of these resources has been, and will continue to be, required by the marketplace. MPEG compression can be used to fit the signal into the required bandwidth and, depending on signal quality requirements, can be used to reduce the bandwidth requirements even further. Several streams can be frequency multiplexed into a single transponder. Or, the time multiplex approach can be used. In this case, a single MPEG data-stream composed of multiple elementary streams occupies an entire half (or whole) transponder.

Remember that two-camera feed? Using MPEG compression and digital modulation, video from both cameras could be sent back to the station where they could be treated as two separate sources. They could then be switched at the station instead of being pre-switched at the truck. Instead of sending two different sources, a single source could be sent faster than real time. This solves the 10 minutes of raw tape and a five-minute window dilemma. Finally, a single higher-quality signal could be sent real time.

Digital SNG technology

Digital SNG does not use frequency modulation. Instead, bi-phase shift keying (BPSK), quadrature phase shift keying (QPSK) or the newer eight quadrant phase shift keying (8PSK) modulation is used. Each cycle of these modulation types is considered one symbol. BPSK signifies a high or low bit by a 180° phase shift from one symbol to the next and sends one bit per symbol.



Flexibility is the key to success for mobile production units. Well-designed I/O panels, along with the ability to quickly add to or change the equipment configuration increase a vehicle's flexibility.

QPSK has four phase states. Each symbol or cycle can convey one of four states, which translates to two bits per symbol; with 8PSK it is three bits/symbol. QPSK is twice as efficient as BPSK. But is there a catch? Between BPSK and QPSK there really isn't one, which is why QPSK is often used. Both types have the same power efficiency, but QPSK has better bandwidth efficiency. Power efficiency is the bit error rate that occurs with a given E_b/N .

Neither of these signals has a carrier component in the spectrum, therefore, local carriers must be derived at the receiver. This means that Ku DSNG systems must use high-quality LNBs at the receive end. Local oscillators (LOs) used with older LNBs may drift as much as 2MHz to 3MHz. Digital decoders require 70MHz IF, or in some cases L band, outputs that drift no more than 100kHz. The better LNBs use temperature-compensated crystal oscillators in their PLL circuits. The measurement of LNB LO stability is called phase noise, which measures

how much energy is found at various frequencies away from the desired LO frequency. An example of a good phase noise measurement is -65dB@1kHz.

Another consideration is spectrum inversion. Like analog signals, the digital signal is upconverted at least once on the uplink side, downconverted in the satellite and downconverted at least once on the receive side. These conversions are accomplished through heterodyning. Basic communications theory says the product of this process is the original signal, the local oscillator sine wave, and the sum and difference of the first two. The sum product is a replica of the original signal, but at a new frequency. However, the difference signal has a spectrum at its new frequency that is a mirror image of the signal.

Some frequency converters use the sum product (filtering out all of the other products), while others use the difference product. If an even number of these difference products are used in the path, no problem, the double

inversion cancels out. But if it's an odd number, it can cause problems. Digital receivers must be able to cope with this situation. Analog FM satellite signals do not seem to be affected by this, because once the signal is discriminated, a simple inversion of the baseband signal is all that is needed. Most newer receivers sense the inversion and correct for it automatically. When QPSK receivers are used for digital signals the I and Q signals must be able to be inverted to solve this problem.

Another modulation method is quadrature amplitude modulation (QAM). In the United States, QAM is generally used in terrestrial microwave links and not with domestic satellites. The satellite transponders that are generally available for demand usage have traveling wave tube (TWT)-type power output transponders that are inherently non-linear in amplitude transfer characteristics. Amplitude modulation pre-distortion has been tried, but not successfully, so QAM is left to the Canadian birds. The phase pattern that QAM generates is referred to as a constellation. Just as NTSC/PAL color modulation uses phase and amplitude, so does QAM. The number of points in the constellation, such as 16, determines the QAM type. Sixteen points would indicate a 16-QAM signal. Each point in the constellation signifies a state. Sixteen-QAM has 16 states. It would take four bits to specify one of 16 states. Therefore, every symbol or cycle of 16-QAM conveys four bits, giving 16-QAM two times the spectral efficiency of QPSK. For 16-QAM to maintain the same average transmit power as QPSK, the constellation must be packed tighter. But, as the space between the points in the constellation diminishes, the error probability goes up. Sixteen-QAM needs a higher S/N ratio for the same error performance as QPSK.

One trick used to minimize errors in QAM is to use "Gray" coding for mapping points in the constellation. This means the value of any point in the constellation is only one bit differ-

ent from any adjacent point. As we will see shortly, when link budgets and error detection and correction are considered, as data payloads increase, error immunity tends to decrease. Modulation schemes that offer higher spectrum efficiency require higher S/N ratios, which means increased satellite link budgets. Or, you could elect to allow lower link budgets, but add error correction bits to correct for errors received. However, this lowers the useful data rate. In the end, both approaches mean you trade data throughput for error rates.

This data rate/error correction trade-off takes place through the use of forward error correction codes that are sent along with the video. These codes are used to determine if an error has occurred; they also provide information needed to correct the error.

The advantage of using digital is that once the signal is in its final domain, it stays virtually transparent until the error cliff.

Common codes are Reed-Solomon and Viterbi coding and they are often used together. When this is done, it is considered concatenated coding.

Reed-Solomon builds arrays and adds error correction information to the end of each row. To enhance the robustness of these error correction codes, the array is not always read out the way it was written in. The array might be built a row at a time, but read out by columns. This is called interleaving.

Viterbi coding is more involved. To explain it, we must first touch upon the *Hamming Distance*. If you have a binary number and compare it to a second binary number, the Hamming distance is the number of bits that must change in the first number to make it equal the second number. Using the Hamming Distance, more bits can be added in such a way as to minimize the decoding possibilities if an error occurs. A common ratio of info to error correcting bits is 1:2, which is called a span of three. At the

receiving end, at any point in time, the last three bits are used to determine what the value of the next three should be. Of eight possible values, only two have the lowest possible Hamming distances. One is used if the next info bit is a one, the other means the next info bit is zero.

This is known as Trellis coding because the state diagram looks like a trellis or lattice fence. The Viterbi algorithm takes Trellis coding to a higher degree by expanding the span used to ensure correct decoding. A two-step process is used; possibilities are limited based on the Hamming Distance, then dummy zeros are inserted and the Trellis lookup is done a second time. What falls out are the two shortest distances, one representing a one, the second representing a zero. This makes for a robust datastream in a channel that can teem with noise. The trade-off is that for every three bits sent, only one is payload. The other two are for error correction. Viterbi coding can reduce the required Eb/N by 5dB, thus lowering the required link budget.

The advantage of using digital is that once the signal is in its final domain, it stays virtually transparent until the error cliff. For satellite transmission, the error cliff occurs when the noise in the path overcomes the receiver's error detection and correction system. Because errors increase as the carrier to noise decreases, the goal is to keep the carrier-to-noise ratio as high as possible. Understanding and properly computing link budgets can help you keep that carrier-to-noise figure up and keep you away from the edge of the cliff. ■

Peter Ludé is vice president, automation and transmission systems, Business and Professional Group, Sony Electronics, Inc.

Editor's note: The author would like to thank Jim Boston, senior product support engineer, automation & transmission systems, Business and Professional Group, Sony Electronics, Inc., and Richard Majestic, product manager, SX transmission products, automation and transmission systems, Business and Professional Group, Sony Electronics, Inc. for their help.

BET builds new OBV

The BET TV network brings the show to the road with a new mobile unit and gives us a behind-the-scenes look.

By Steven Lewis

To meet the growing needs of Black Entertainment Television (BET), the network selected Communications Engineering, Inc. (CEI) to design and build a 50-foot mobile unit with an expanding side. The custom design was crafted by CEI vice president of engineering John Wesley Nash and engineering director Jim Conley. The collaboration with the BET engineering staff was led by assistant chief engineer Bill Parker and director of audio operations Robert Jackson.

Form follows function


Taking into account time, space and budget, the detailed evaluation of technology, systems and design trade-offs began in 1996. The truck engineering design process adheres to the same rule of form follows function, with BET's functionality needs addressed and defined upfront, which in turn, determined the truck's shape, size and equipment.

In addition, BET wanted the equipment selection to be predicated on its expected use during approximately 75% of the productions. Only those systems to be used a majority of the time would gain a spot within the tightly designed layout.

When building a truck, an equally important consideration is that the truck be provided with sufficient input and output capabilities to accommodate any unique location needs. This also ensures that the truck is prepared for future technology and can adapt to the myriad of location scenarios that it might face in the future.

Attention to detail pays off

The 50-foot mobile unit design issues that were addressed by the CEI/BET team focused heavily on the important audio

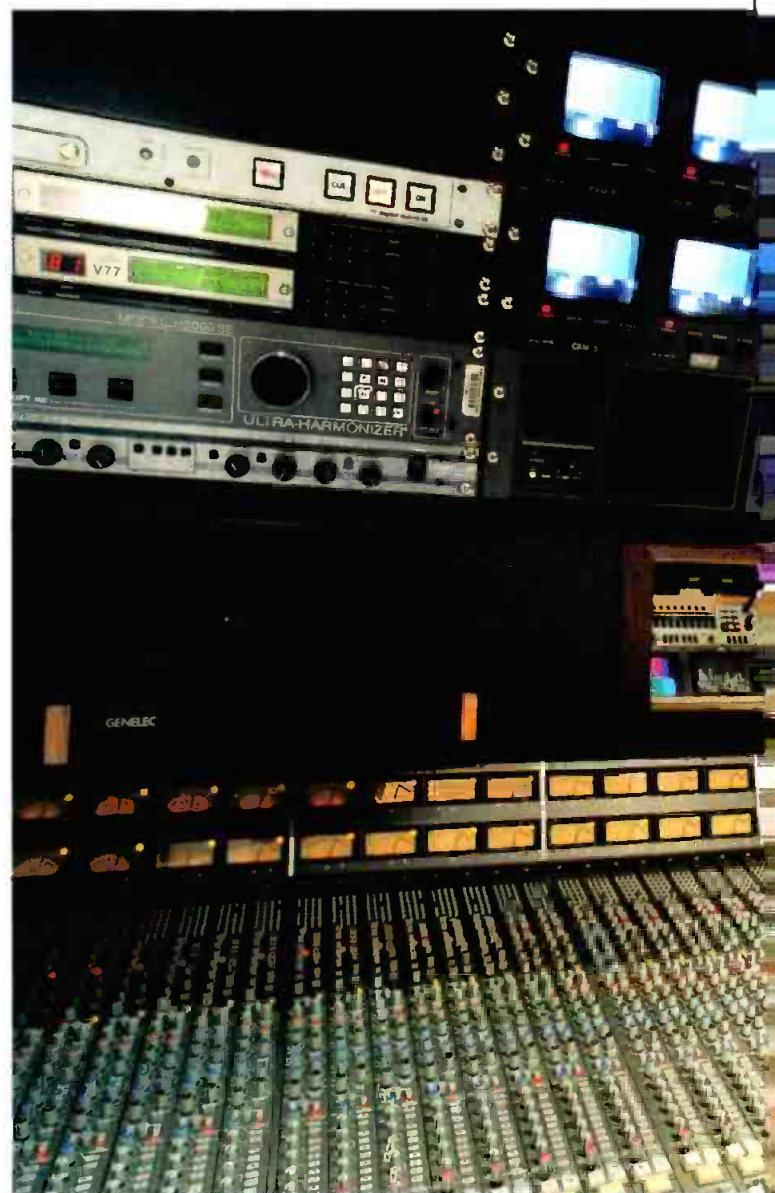

The BET truck audio control area with the SSL SL8000GB console.

and video requirements planned for future BET productions and some anticipated third-party venues.

Calumet Coach Company was selected to build the BET trailer. It's always paramount that any design meet the specific Department of Transportation (DOT) rules, which dictate a trailer's allowable size, weight and weight distribution. Key design considerations affecting production operations and trailer weight distribution issues were analyzed by computer simulation. The design analysis and functional layout deliberations ultimately resulted in the trailer being built with split rear axles, rather than tandem rear axles. This affords better weight distribution and provides more stability.

The BET truck's functionality is shaped by the music venues and special events it is intended to support. Considerations within its I/O panel connections and other design details, such as accommodation for 24 cameras, prepare the truck for sports productions, as well. The trailer's 50-foot length allows it to fit into most stadiums and arenas within the United States.

The audio and video interface panels were designed to support fast, versatile setup and include monitoring equip-

ment, as well as intercom and telephone outlets. The truck's power systems are as versatile as possible and can connect to single or three-phase power feeds with a voltage range of 180 to 275VAC. The overall design of a truck represents a delicate balance between weight, environmental systems and budgetary considerations. The requirements for power and A/C were also evaluated against each technology system. The use of smaller, power-efficient systems dovetailed with the need for the efficient use of space.

From the wheels up

Packed into the 50-foot trailer is a full TV production and control facility. There are four different functional areas of the trailer, each of which presented unique design and implementation challenges.

The audio area is located at the rear of the trailer. This is where the audio portion of the routing switcher, SSL mixing console and 360 Systems DigiCart disk recorder are located, along with a wide variety of external audio processing gear. Integrated and available for audio production are multiple DA-98 Tascam digital eight-track recorders. The dense wiring of the audio I/O panels are arranged to be accessible from the rear underside of the trailer.

Special attention was paid to the acoustic characteristics in the audio area to provide as quiet a space as possible during live productions. Reinforced wall materials and acoustic seals were incorporated into the walls with an internal door that allows movement to other areas of the trailer. Polymer materials surround the hanging speaker enclosures and act as acoustic barriers in the upper air plenum. All this combines to help isolate the audio area from the surrounding noise and vibration.

Located in front of the audio section is the production control room area. The 52 monitors in the monitor wall use a combination of 13-inch and 19-inch Sony color monitors. Production switching is handled by a GVG 4000 3M/E digital production switcher interfaced with an Abekas Dveous DVE system. On-air graphics make use of three-channel Chyron iNFINIT workstations with integrated IM-AGESTOR still-store.

The control room space is divided into three rows and takes advantage of the trailer's wider 38-foot expando section. The monitor wall and production console were designed to be unhinged from their folded, traveling position to create a larger control area with integrated seating, console and equipment controls ready at hand.

The production control video wall uses an extensive custom tally system supplied by Image Video. In addition to on-air (red), isolated (yellow) and ready (green) indicators, the take me (flashing yellow) message is available with dynamic integration between the router and production systems.

Moving forward in the truck, adjacent to the control room is the videotape and transmission area. Digital Betacam, Betacam SP and VHS tape formats



BET builds new OBV

are accommodated. Access to the rear of the monitor wall is provided from the videotape area. A Sony Slo-Mo recorder is located in the VTR room. Video and audio monitoring equipment is located here, as well as in the audio and production control areas to provide T&M capabilities. The truck's expando wall and space layout allows for the location of a separate tape associate

panels provide access to entire lengths of racks in the videotape and transmission areas. Additional truck features include a reinforced diamond pattern skid pad on the trailer's roof that can accommodate cameras, satellite or microwave equipment.

Given the extensive amount of travel life, the effects of vibration needed to be considered. Connectors and mounting hardware were used with removable chemical-locking compounds to ensure

- 42,000 feet of precision analog video coax;
- 4,000 feet of AES/EBU digital audio cable;
- 1,000 feet of coax thin Ethernet LAN cable;
- 1,000 feet of nine-conductor control cable; and
- 8,000 feet of triax.

The truck has additional wiring considerations that include those connections for connections with the outside

world. A 24-line Lucent phone PBX was selected for flexible voice and data communications. The system is compatible with the Telex RTS ADAM intercom system. The intercom system provides a 72x72 matrix allocating a 16x16 matrix for IFB. The RTS system provides flexi-



The BET truck videotape area with assistant director's console in the foreground. (Inset: before the build-out, the truck videotape area with assistant director's console in the foreground.)

director's console, which incorporates audio/video monitoring and slo-mo control.

At the extreme front of the trailer is the video control area. Located here are the CCU panels, camera triax patching and remote controls for the TBCs, proc amps and frame syncs.

Design twice, implement once

By the time the trailer's shell had been prepared for installation, the equipment design had been completed with much attention paid toward allowing access to the rear of each and every rack. Maintenance capability and equipment access are provided without any interruption to an ongoing production. Outside, fold-out service platform

secure mechanical and signal connections. All nuts, bolts, washers, I/O panels and rack installation materials take advantage of this technique to retain a tight fit no matter the vibration.

Wired for success

Belden cable was selected for the installation. The cable paths are distributed through three channels under the floor. Cables were also pulled through the upper air plenum, but arranged so as not to impede the air flow within the trailer.

Among the Belden cable products selected were:

- 30,000 feet of digital video coax;
- 1,000 feet, 24 pair hi-flex audio snake;

bility in arranging the IFB, intercom and outside interconnections in addition to providing a TW intercom interface.

For audio? It's SSL For video? It's Phillips BTS

The BET truck's extensive audio design provides as close to an audio-only truck as you can get in a combined A/V truck.

The SSL 8000 series on-air production and multitrack audio mixing console can provide 40 mic inputs and eight stereo inputs, which already have proven effective in some early productions. The SSL console's flexibility is well-matched to BET's jazz, blues or



BET truck transmission area viewing back into the videotape area.

zydeco music shows, but also can be quickly adapted to sports and "talking heads" shows.

Because many different engineers would be using the console, the system had to be flexible and easy to use. BET engineers found the console's signal and routing versatility to be a key factor in its decision to go with the SSL 8000.

After an extensive evaluation, the team selected Philips BTS LDK-10 cameras with Canon 70X field lenses and BTS LDK-10P cameras with Canon 20X EFP lenses. They connect to a Philips Venus digital routing switcher. The truck is triax-wired for 24 cameras to accommodate future large events and has internal CCU connections for as many as 20 cameras.

BET selected the Philips BTS cameras because of their ease of use and frame transfer technology, which provides excellent overall picture quality, particularly on close-up talent shots. The cameras come prepared for future DTV operations with built-in 4x3 and 16x9 capability through Philips' DPM elastic pixel system.

The Philips Venus digital routing switcher provided a good fit given the truck's

premium on space and power. The router retains a compact design and accomplishes lower power consumption.

Expect the unexpected

Previously, BET had used separate audio and video trucks for its music venues. However, the nature of live recording often means unanticipated changes need to be addressed rapidly. All available tools and technologies in this new design allow the truck to be quickly configured to capture any event effectively and creatively.

Equipment list:

SSL on-air production and multitrack audio mixing console; 360 Systems DigiCart/II; Dolby, Fostex, Genelec, Hafler, Acoustech and Sony monitoring equipment; AKG, Electro-Voice, Sanken, Sennheiser, Shure and Sony microphones; Philips Venus digital routing switcher; Philips LDK-10 cameras with Canon PJ70X9.5BIE 70X field lens; Philips BTS LDK-10P cameras with Canon J20X8BIRS 20X lens; GVG 4000 3M/E digital production switcher with truck control panel; ABEKAS Dveous DVE system; Sony Digital Betacam videotape machines with Slo-Mo controllers; Production monitor wall with 52 monitors; Chyron iNFINIT three-channel workstations with IMAGESTOR; Leitch clock and time code; DFS synchronizer systems; Telex RTS ADAM digital intercom; Tektronix sync and test generators; Tally Display System video under monitor

Much ado about everything

The CEI design and build process allowed BET to weigh the various budget, technology, time and space trade-offs. The result is a beneficial series of well-integrated compromises that have equipped BET with a top-notch digital platform for immediate needs, as well as the expanding production requirements anticipated in the future.

Already the truck has proved to be an indispensable addition to BET's production capability, whether providing production for its regularly scheduled TV shows at the headquarters facility in Washington, DC, or out on location for live music and

sports venues.

The design process allowed BET to make changes and update the technical and drawing systems databases in real-time. Better yet, within 24 hours of receiving the completed mobile unit, the network began its first live production that led to 43 shows in the first four weeks. Not bad! ■

Steven Lewis is director of sales and marketing, Communications Engineering, Inc., Newington, VA.

A history of



remote broadcasting

Last year marked the 50th anniversary of the first telecast of the World Series. Historically, this type of activity has been referred to as a "remote." Describing how to conduct remotes is daunting. In this age where camcorders are as pervasive as toasters, the engineering and technical endeavors required to "pull off" a remote are lost on the average viewer. Today, 50-foot trailers with their complement of equipment are the norm. As we begin the next 50 years of remote TV coverage, it's time to look back to where remotes have been and where they are today.

By Jim Boston

The economics of “remote” production has paralleled the airline industry in many ways. People get into these fields because of the perceived glamour. But don’t tell that to the people who do the work, fourteen hours a day, often in the rain and cold. On the other hand, if you like to travel and see new things and enjoy the adrenaline rush from the terror that comes from doing live television, this is the business for you.

The ability to improvise, troubleshoot and engineer under environmental and time constraints is extremely helpful. The draw this business has for many means there is no shortage of people building and operating remote facilities. However, there is a high infant-mortality rate for startups, just as historically has been the case for airlines. The equipment, planes in the case of airlines, trucks in the case of the remote companies, often has numerous owners over its lifetime. Also, like with the airlines, we periodically see a consolidation of players and a few heavyweights emerge, with many smaller providers finding a niche or disappearing.

Mostly for sports

Historically, most trucks were built for sports. Trucks have been referred to as “sport” or “show” trucks. The difference is that “show” trucks have larger, more luxurious control room compartments, while “sport” trucks have more VTR capability, mainly for replays. Audio used to be more elaborate in a show truck, but now audio has taken on increased importance in many trucks.

Most trucks came about to cover sporting events, although sometimes a station would build a truck for use on a particular show or to show the station’s “colors.” With the exception of 16mm film, the only way to acquire video was with an electronic TV camera. Long before news departments discovered that an RCA TK-76 and a Sony VO-3800 could go together to allow a TV crew to go almost anywhere, cameras were not portable. The RCA TK-11 had a camera head that weighed 107 pounds and required a 65-pound “suitcase” camera control unit as well as a 62-pound “suitcase” power supply. It needed a thick multicore camera cable (remember TV-81?) and lots of light (many cameras had their own light mounted on top); and it was only black and white. Its picture was harsh, and the orthicon pickup tube was sticky and burned easily. If the camera operator happened to find the sun, you had to buy a new tube. Often, much time was needed shooting white cards to “de-burn” the tube after use. To try to stop the “burning” of the tube, the cameras had an orbiter, which consisted of a motor mounted to the side of the camera that slowly rotated the position of the yoke and tube to slightly move the image

continually. However, it was noisy and often had to be turned off in close-up situations.

More cameras tell the story

The zoom lens didn’t exist until the mid-1950s. The camera had a turret on its front that accepted four common fixed lenses: 35mm, 50mm, 90mm and 135mm lenses. But no director wanted to see a new lens racked when that camera’s tally light was on. “Trucking” or “dollying” the camera was the only way to tighten in on a subject without changing the lens. Today, the 70:1 zoom is found on many sports remotes. Where 15 years ago, head-to-toe shots used to be all that the 30:1 zoom lens could provide from the camera at the 50-yard line, now the nose shoot is creeping into some football coverage thanks to the 70:1 zoom lens.

In the mid-’50s, the color camera found itself in the field. It made the TK-31 seem portable. The RCA TK-41 was the first widely used color camera. It had three orthicon tubes and a camera head that weighed a mere 250 pounds, without the viewfinder, which added another 45 pounds. The whole camera chain weighed almost 500 pounds. Red Skelton Studios had a truck that had a hydraulic lift so cameras permanently mounted on cradle heads and studio pedestals

could be stored permanently “built.”

Early color cameras required registration and other setup adjustments often. Sometimes, this procedure had to be repeated a second time right before the game as the outside temperature rose for day games or dropped for night games. In



KSTP-TV took color TV on the road in this fully equipped color cruiser.

1955, NBC did its first colorcast of the World Series. Partly because of their size and weight, early trucks did not carry many cameras; the first World Series had three. In the 1950s and ‘60s, many network baseball games had a maximum of five cameras. Many local baseball games, even well into the ‘70s only used three cameras — usually at high home, first and third bases. If a fourth camera was added, it was at low home or center field. Back then, the event was merely covered. If a camera had a zoom lens, it was either a 10:1 or at most a 15:1.

Today, five to seven cameras is common for local baseball games. FOX uses 11 or 12 when it does baseball. High cameras aren’t the rage anymore. High home and maybe high first survived, but now low cameras are used. Cameras at low first and third cover right-handed hitters and left-handed pitchers or left-handed hitters and right-handed pitchers. Center field is considered indispensable for pitcher/batter shots. Now, cameras are added from various angles in the outfield. The object today is not to just cover an event, but to tell the story of the game.

A history of remote broadcasting

Camera evolution

In the 1960s, camera evolution accelerated. The second generation of color cameras included TK-42/43s for RCA and PE-250/350s from GE. They tended to use four pickup tubes — three for color and one for luminance. Although their resolution improved, it took the invention of the “enhancer” to improve their sharpness. Although this device was made available separately, it was first included as part of the camera in Norelco’s PC-60/70. This was a third generation of color cameras that used three Plumbicon tubes instead of orthicons (or a mixture of orthicon/vidicom tubes).

Within a couple of years, RCA responded with its TK-44. These camera heads were approximately 70 pounds and made remotes easier. ABC and CBS made extensive use of the PC-70. In the late 1970s, RCA introduced the TK-76. Within a few years, it had a hard camera shell that it could be installed into so it could be used as a hard camera. This was known as the TK-760 and NBC made extensive use of it for remotes. The problem with these cameras was they were still designed to use multicore cable between the camera head and the camera control (although some vendors offered triax systems for the TK76/760).

The next generation of cameras confronted the multicore issue. They also introduced the microprocessor for use as camera controllers. Most camera chains had a microprocessor in the camera head and the camera control unit. These two processors talked to each other over an RS-232 link through the camera cable. The CCU would continually send out a stream of analog values (commonly known as a pulse amplitude modulation [PAM] stream that the head stored in sample-and-hold circuits). These analog values controlled everything from registration and

geometry, to video level and iris settings. The microprocessors at the CCU and the camera head-ends ensured that the PAM stream could not get out of sync and have the wrong values written to the various sample-and-holds. The other architectural approach was to have the camera system reside in the head.

Instead of splitting the video processing between a camera head and the CCU, all the processing was in the head and the CCU was not much more than a remote-control unit. These two approaches made triax feasible. To power the head, AC or DC with a potential of as much as 300V is sent down the center conductor of the triax. Most



WGN-TV covered 120 Cubs and White Sox daytime home baseball games during 1960, with four RCA TK-41 cameras.

cameras have power safety systems so power is only applied if the right load and current draw is sensed. Cameras on multicore could not have runs of more than 1,000 feet (500 feet was a safer length). Today, half a mile is a common maximum distance from truck to camera head. Many stadiums have as much as 30,000 or 40,000 feet of triax permanently installed.

The second major area on trucks today revolves around tape. The videotape recorder didn't exist until the tenth televised World Series. In the early 1960s, Quad VTRs were installed on trucks. These first-generation VTRs weighed as much as 3,000 pounds if equipped to handle color. They consisted of as many as five racks of electronics and tape deck in the form of RCA's

TRT-1B or a console unit and two racks if an Ampex VR-1000. Glenn Armistead, a production company, had two TRT-1s in a trailer, which were used in taping the Ernie Ford show for NBC on location in the early 1960s.

Tape capability was not common on trucks until the 1970s. The second generation of VTRs in the form of RCA's TR-22 and Ampex's VR-1100/1200 made tape road trips more doable. The VTR fit within one stand-alone box, which was at least six feet long and six feet high and weighed more than 1,000 pounds fully loaded. What was considered fully loaded? Color capability, servos that would gen-lock to external

reference and the ability to do insert or assemble edits were all optional. Some machines were used for early attempts at instant replay. But these Quad (four rotary record/play heads) machines would produce no playback video in still and would not output playback video at any speed other than times one (because of their segmented tracks). The digital TBC and DT/AST head to make variable speed possible would not arrive until the early 1970s. An added plus with these machines is that they were

slow to accelerate tape in shuttle, and if you were lucky, the machine would servo lock after only two seconds.

At the end of the 1960s, Ampex made the era of the instant replay feasible with its HS-100 analog disk recorder. It allowed instant access and playback speeds other than times one. But its storage capability was only a couple of minutes. Its cost ensured that only the networks would be able to use it on a regular basis. Even then, there was normally only one of these units at a venue. Not until the digital TBC gained enough muscle and the AST/DT playback head was invented would instant replay capability become common place.

The arrival of the type C format VTR from Sony and Ampex created the expectation that all trucks have replay

capability. Today, one-inch VTRs have given way to Betacam and digital Betacam. Last year's Super Bowl used 22 VTRs for replays. The replays' central role in telling the story now dictates that many shows must have a producer to coordinate isolation strategies and playback selection from the slew of machines available. Directors and producers have to understand the strategies and tactics of the teams they are covering. For Monday Night Football, ABC uses a separate truck just to house the 14 VTRs it uses for replay duty.

Audio then and now

Audio also saw its importance grow exponentially. Early audio mixers often had no more than a half dozen inputs; today's mixers have as many as 96. In fact, many times the audio effort was small enough that the mixer was not even in the truck. The mixer would be setup up in the announcer's booth for baseball or football coverage. There was little emphasis on capturing the sounds that comprise the composite event experience. Early efforts at this often centered on marrying snow saucers or even wooden salad bowls with stick microphones. These crude parabolic mics were used to capture the "bat crack" sounds in baseball or player contact in football.

On to video switching

The production compartment has to keep pace with the other areas of the remote truck when it comes to change. The change in video switchers has been the continual increase in capability. Not only has the number of effects banks increased, but the functionality of each bank has increased. Past switchers only allowed one operation per effects bank, be it a dissolve, a wipe or a key. The ones in use today allow more than one of those operations to occur simultaneously on each bank. The use of "snapshots" allows the operator to store and recall switcher setup almost instantaneously. In its infancy, there might be half a dozen sources available on a remote. Today, sources have increased to a point where routers are needed to filter the amount of sources available at any instant at the switcher. Switchers now accept dozens of inputs and, in some cases, to keep the

control panel a manageable size, have "shift" functions for crosspoint buttons so that each button can access more sources. Almost every truck now has a DVE/DME onboard; some even have still-stores.

The number of monitors found in the production compartment has exploded. The term "monitor wall" didn't

end up on the scene simultaneously. The era of the single "Chyron" operator is rapidly coming to a close.

Moving on

Trucks today would probably not recognize their ancestors. Early trucks resembled a bus or a book mobile. The driver could usually walk from the



Tractor and two trailers that comprise the Glenn-Armistead color TV production system. One unit contains control, switching and effects equipment; the other contains a film system and two color TV tape recorders.

exist early on. In fact, monitors used by the director and technical director were often the same ones used by the video operator to shade cameras. Many early trucks had a single compartment. All the operating positions in the truck would use the same set of monitors. Today's trailers usually have separate compartments for camera control, videotape, production and audio. Sometimes, transmission has a separate compartment, but it is usually associated with video.

The final area that has gained prominence on a truck is graphics which didn't exist on trucks until the mid-'70s. Graphics used to be a black-and-white camera, often just outside the truck, that shot art cards. Those graphics weren't keyed over video until the '60s. Early on, switchers could only "super" them. That meant superimposed by doing a partial dissolve to the graphics camera. In the '70s, NBC worried that multicolor graphics might make the scene too busy. Now, bumpers, replays, even regular play, use heavy graphics. FOX NFL coverage uses a separate truck for all the graphics layered over the game. Today, switchers need multiple downstream keying capability to handle all the sources that

steering wheel to the back of the unit without going outside. The other truck architecture was the box and cab, much like many Ku trucks today. Unless you were putting tape machines on a vehicle, it was hard to fill up the space in a 40-foot trailer. Few tractor trailers were in use until the '70s. The Glenn-Armistead and the trailer WGN used for White Sox and Cubs baseball in the '60s were only a few examples. WGN's 40-foot trailer only carried four TK-41 cameras.

Today, trailers as long as 53 feet ply the interstates. Many are pushing the 80,000-pound maximum bridge weight limit. Many trailers separate their dual axles by a few feet so they can carry more weight over the trailer's wheels.

The remote business has captivated many of us. It offers what has drawn many of us into this business in the first place, adventure and a taste of show business. With the exception of news, it is the last bastion of live television. ■

Jim Boston is senior product support engineer, automation & transmission systems, Business and Professional Group, Sony Electronics, San Jose, CA.

Authors's note: The author wishes to thank Glenn Hill, senior support engineer for production systems, Sony Electronics, San Jose, CA, for his technical support in this article.

Make your daily interactions more satisfying

BY KARE ANDERSON

Kare
Anderson



Suppose a colleague gives you a compliment as you meet her in the hallway and then another person accidentally bumps you in passing. You will respond more to being bumped than to being complimented, even if the person who knocked into you immediately apologizes. You have little control over those instinctual reactions. In fact, your mood will be altered longer from a bump than a compliment and you will remember it longer.

Why? Not because you are a negative person, but because your most primal instinct is for survival. That instinct is hardwired into your brain so that even in modern circumstances your swiftest, most pervasive reactions are to protect yourself from any sign of "danger." All of your angry feelings are the visible surface of an underlying negative feeling, such as hurt or irritation stemming from some early circumstance in your

life where you felt in danger. The current source of your anger looks similar to that earlier time.

From negative to positive

When you react negatively, even with a briefly hardened face or a sharp tone in your voice, the other person instinctively escalates in a ping pong reaction. It is easier for an interaction to degenerate into a difficult time from one "bad" action than it is for the experience to rise from a positive action.

Because you can't rewire your brain to change your gut reactions, you can compensate by appearing "safe" when you meet people. First, move slower and speak slower, lower and less so the other person can become comfortable and familiar with you. Don't talk too loudly or too quickly or move too fast, especially with high, quick arm gestures. Such gestures can rob you of the

appearance of power. If your voice is lower and slower, your sentences shorter and gestures spare, then the other person will accept you more quickly.

Second, because people instinctively like people who are like them, demonstrate the part of you which is most like them. Talk about common experiences, background or places. Adjust your voice level and rate and amount and kind of body motion to become more like theirs. Children do this instinctively. Only as we get older do we lose the instinct to adapt to another's behavioral style.

See the box below for other suggestions on gaining and holding people's attention. ■

Kare Anderson is a speaker and author. Visit her web site at www.sayitbetter.com. Also sign up for her free on-line monthly newsletter, by sending "SIB" to her at kareand@aol.com. To set up a speaking engagement, call 415-331-6336.

Attention getters

- **Be vividly specific.** A detail or example proves a general conclusion, not the reverse. A detail is memorable, while a statement is less credible and easily forgotten. When you want to be heard and remembered, characterize your information or request with a detail, example, story or contrasting options. Use words that relate to the senses. For example, "beautiful color" is not as vivid as "blue," which is not as vivid as "cobalt blue."
- **Be "plainly clear."** Don't wear patterned clothes or other detracting detail on your clothing, especially on the upper half of your body, because it will shorten the attention span of the person with whom you are speaking.
- **Look for the underlying issue.** When you are arguing for more than 10 minutes, you are probably not discussing the real conflict and are unlikely to resolve it in the discussion. Look for the underlying issue. Read Robert Bromson's book, *Dealing With Difficult People*, for ideas on recognizing difficult behaviors and adopt behaviors to protect yourself from them.
- **Deepen their commitment before you ask for**


more. The more time, actions or effort someone has put into something, someone or course of action, the more deeply they believe in it, will defend it and will work on it some more. If you want more from the other person, wait until he or she has invested more time, energy, money or other resources to ask for it.

- **Bring out their best side.** When people like the way they act when they are around you, it's because they see qualities in you that they admire. The opposite is also true. Don't make suggestions or requests when they are acting in an unbecoming way; your efforts will only backfire. Praise the behavior you want to flourish.

- **Move to motivate.** Motion activates emotion and makes experiences more memorable. Motion attracts attention and causes people to remember more of what's happening and feel more strongly about it. Get others involved in motions with you that create goodwill. You are more likely to get "in sync," because your vital signs may become more similar, such as eye pupil dilation, skin temperature and heart beat. ■

Introducing DVEXtreme. The world's first Windows NT™ based, 10 bit, multi-channel 3D DVE.

3 Video + 3 Key Channels

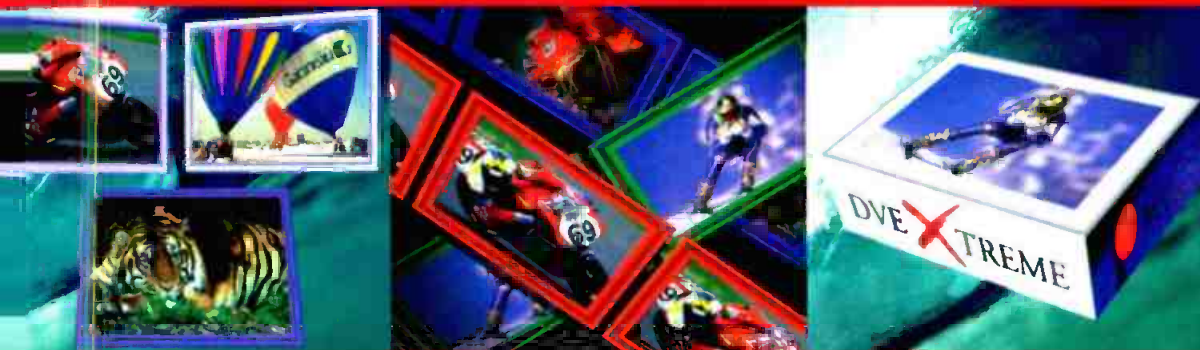

16:9 ASPECT RATIO

4:3 AND 16:9 SOFTWARE
SWITCHABLE.

3D DVE

FULL 3D WARP ENGINE INCLUDING
PAGE TURNS, WATER RIPPLES, BALL
EFFECTS, EXPLOSIONS, DEFOCUS,
SHADOWS, SPOTLIGHTS, CUBE BUILDER.

Painterly Effects



PRE-TRANSFORM KEYS

CHROMA, LUMA, LINEAR, AND
GENIE KEYS AND CUSTOM ALPHA
WIPE PATTERNS.

NETWORKING

IMPORT AND EXPORT ALL MAJOR
FILE FORMATS, AND EASILY TRANSFER
FILES TO AND FROM PINNACLE'S
LIGHTNING VIDEO STORAGE
SYSTEM, AND TYPEDEKO CG.

Particle Effects



DVEXtreme delivers all you'd expect from a high-end DVE...picture quality, page turns, warps, highlights, montages, drop shadows and variable borders, plus a few surprises. Pinnacle's proprietary **ParticleFX** and **PainterlyFX** technology let you turn your ideas into custom effects. With ParticleFX, you can create effects like Blowing Sand, Lava melt, Staggered Slats, Radial Burst, Swirl and Disintegration in real-time. And with PainterlyFX, Video textures and paint-look effects like Crystals, Bubbles, Stained Glass and Beveled Glass can be used on live video! **Get a hands on demonstration** of the most extreme Digital Video Effects System yet. **Call 1-800-4PINNACLE ext. 83** to for the name of the dealer nearest you!



Circle (59) on Free Info Card

www.americanradiohistory.com

Applied Technology

Editable MPEG-2: Today's dynamic video compression format

BY JAMES FETTEROLF AND MEINRAD ZELLER

Is MPEG-2 in your future? Chances are if you're in the broadcast or post-production community you will soon face some form of the MPEG-2 audio/video compression format, if you haven't already. In fact, as our industry accelerates into the new digital age, broadcasters have no alternative to the cost efficiency MPEG-2 provides their facilities, as well as the superior quality and frame-accurate editing MPEG-2 gives post-production studios.

However, confusion surrounds the dynamic compression format. MPEG-2 is not just one standard, it comprises different profiles and levels ranging from applications involving video CD to high-definition television. The broadcast community has embraced MPEG-2 MP@ML IPB frame as a format for transmission and distribution because of its low bandwidth and good quality. But many believe that frame-accurate editing with MPEG-2 is impossible. Recent developments challenge that viewpoint as the industry explores two forms of MPEG-2 editing schemes: 4:2:2P@ML and MP@ML 'IPB frame,' which is 4:2:0 color sampling. Both co-exist and yet have different and crucial roles in post-production and broadcast environments.

Formats

First, you should understand that MPEG-2 is optimized specifically for video. It has advantages over other compression formats such as traditional motion-JPEG. In particular, MJPEG suffers from an inflexible compression scheme that while adequate for post-production, will never win acceptance

in the broadcast transmission community due to its lack of interframe compression resulting in an unacceptably high bandwidth. Second, due to a multitude of proprietary formats, MJPEG is not easily distributed. Even worse, to get to distribution, video must be re-compressed from MJPEG into MPEG-2 IPB frame. The result is substantial quality loss through concatenation



The FAST Electronics blue provides high-quality MPEG processing in a wide variety of I/O formats.

tion (cascading compression) of formats.

This makes MJPEG an awkward compression format that offers few strengths in post-production and nothing in the broadcast transmission environment. However, uncompressed video, which is ideal for the post-production domain, is expensive and unsuited for the low-bandwidth broadcast transmission world. But going from uncompressed video to MPEG-2 IPB will suffer none of the concatenation issues that plague MJPEG. The result? For the highest-quality demands, uncompressed video will remain solidly entrenched in the post-production editing environment.

Major benefits

MPEG-2 is the only compression for-

mat that has global acceptance and is optimal for the post-production and broadcast environments. It features interframe encoding for high compression, which allows for reduced bandwidth for transmission. At the same time, the MPEG-2 algorithm also offers low compression with excellent audio and video quality for post-production. MPEG-2 also has interoperability

through a clearly defined decoding spec becoming the universal compression medium. Furthermore, MPEG-2 has a rich tool set of flavors, depending upon chroma sampling, the resolution, bit rate, etc., all of which can be modified to reduce the risk of obsolescence. Only MPEG-2 offers flexibility to meet the low-bandwidth demands of broadcast and the high-quality requirements of post-

production editing. Editable MPEG-2 consists of two major flavors of compression. I frame editing, targeting the post-production community and IPB frame editing, targeting the broadcast transmission markets.

MPEG-2 I frame editing for post-production

MPEG-2 I frame, 4:2:2P@ML is targeting the post-production editing community and is focused on quality. These environments typically require a system that can encode and decode in real time while maintaining the highest possible quality through multiple generations. Post-production editing systems also need to be able to use the same compression scheme as that of the final

program distribution format. In other words, you want to avoid cascading different compression formats. Transcoding from MJPEG to MPEG-2 is not only a recompression step, but also a compression format change. (See

- Variable compression from 200 to 2:1. Gives the user flexibility to work off-line/on-line.
- Flexible MPEG-2 algorithm that can go from I frame for production to IPB frame for distribution without suffer-

advantages. This is probably because IPB frame solutions have been adopted and implemented faster than other formats through its use with DVD, Direct TV and other distribution and transmission services. However, there are critical disadvantages that make it unusable in the production editing environment. Some disadvantages to IPB frame editing include:

- IPB frame is limited to cuts-only. This limits MPEG-2 IPB to a few edits and it won't work in a post environment.
- Frame accuracy.
- Quality loss. Quality must be reduced by compression to reach a low enough bandwidth to transmit.
- Extensive processor power is required to edit IPB, even for a cuts-only editor.
- Hw/Sw intensive. To edit with IPB frame, the entire architecture must be optimized to work specifically in that environment.
- Fixed data rates. IPB frame editing does not allow variable compression ratios. Broadcasting IPB is fixed at approximately 9Mb/s.

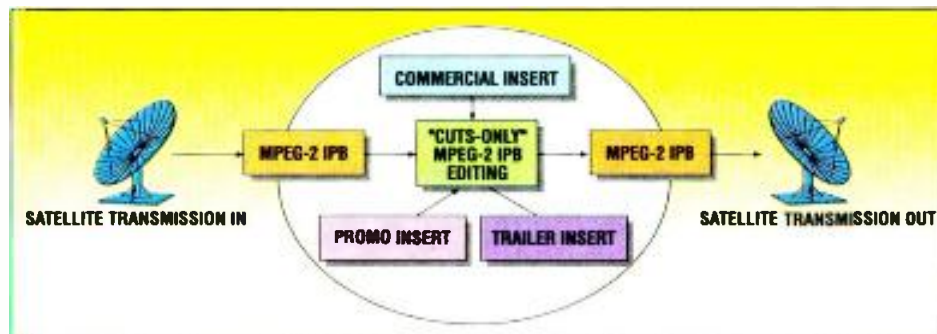


Figure 1. Typical signal path for satellite distribution.

Figure 1.) It is better to go from MPEG-2 I frame to IPB frame with minimal re-compression or data-reduction techniques. Most important, for post-production MPEG-2 must provide frame-accurate editing.

As independent research has shown, an MPEG-2 4:2:2P@ML I frame-only datastream at 50Mb is sufficient even for applications like video editing that demand high quality. Companies such as NEC and FAST, with its new blue native digital editor, have already been demonstrating systems using 4:2:2P@ML I frame editing.

A good way to remember MPEG-2 I frame is that it will be used for *editing* the content to be broadcast. An MPEG-2 I frame signal effectively addresses the needs of post-production editing by providing the following advantages:

- High quality, ITU-BT 601 720x480, 10-bit 4:2:2 chroma sampling and a 10-bit I/O ensures more video integrity through doing multiple generations. It is visually lossless up to eight generations.
- Frame accurate.
- Cost effective. MPEG-2 is approximately 15% to 20% more efficient than MJPEG, which means a savings in storage space requirements.
- Interoperable. Provides freedom to produce a program that can be distributed in its highest quality to any MPEG-2 system.

ing from concatenation quality losses like MJPEG.

Frame editing for broadcast

On the other hand, MPEG-2 IPB frame signal provides satellite and transmission editing environments with low bandwidth and high quality. Broadcast applications typically require a signal that can

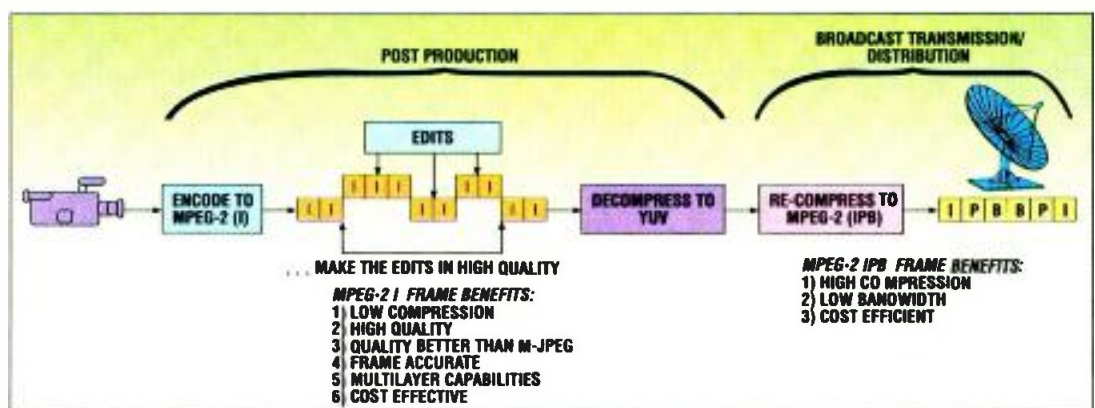


Figure 2. Typical signal path for broadcast distribution.

be satellite distributed but still allows cut edits — all in real time. (See Figure 1.)

A good way to remember MPEG-2 IPB frame is it's used for *broadcasting* the content. MPEG-2 IPB frame-editing systems address the needs of the broadcast transmission environment by providing the following benefits:

- cost effective;
- low bit rate of 9Mb/s;
- 4:2:0 quality; and
- used for distribution onto DVD, VOD, DTV, DSS, etc.

Take it to the limit

MPEG-2 has become a hot topic and most people understand the IPB frame

The benefits of both?

There are significant benefits to using a combination of I frame and IPB frame. In fact, this may be exactly how most production, distribution and transmission will operate in the near future. You may be creating content by editing video with real-time effects, animation, compositing and CG in low compression, high-quality MPEG-2 I frame. Then, output the final product through an IPB frame encoder. You now have an IPB frame signal, highly compressed, with good quality video for broadcast distribution or transmission. (See Figure 2.) The advantages to this technique are that you avoid harm-

ful concatenation and re-compression artifacts by not converting to another compression format. Also, you don't have to convert I frames again unless you want to re-compress to another compression ratio to save space.

The efficiency of MPEG-2

You need to understand the reasons

why MPEG-2 is suitable to the post-production and broadcast transmission editing environments and why it holds core advantages over MJPEG. MPEG-2 is a dynamic and efficient video compression format. MPEG-2 MP@ML IPB frame for the post-production environment is focused on quality preservation, while using MPEG-2 MP@ML

IPB frame in the broadcast transmission environment is focused on bandwidth. Chances are MPEG-2 is in your future! ■

James Fetterolf is the product manager of blue, and Meinrad Zeller is the vice president of research and development at FAST Electronic U.S., Inc. in Foster City, CA.

Applied Technology

A virtual eject button for virtual tape

BY HARRY AINE

Everyone knows the benefits of long-duration video disk recorders (VDRs). Greater storage means that you can enjoy non-linear random access to more material and preview longer programs without first committing them to videotape.

And everyone knows the disadvantages of current video disk storage. Besides the fact that storage space is limited, you cannot begin working on a

new project until the data from the last project you were working on has been removed from the disk and off-loaded to tape. That process of off-loading media files consumes billable hours and often makes accommodating last-minute bookings impossible.

However, what if you could work continuously on a VDR without ever having to stop to make space for the next job? What if you could continue work-

ing with your storage, while someone else began digitizing new material onto available disk space without interfering with your work? What if your graphic artists could start compositing even as the VDR is acquiring the media? What if you could increase your VDR's flexibility, efficiency and productivity, while retaining its unique VTR-type functionality? By separating the VDR's controller from its storage component and by

CALL 1-800-669-9667
FOR A FREE
PRODUCT
CATALOG

COMPLETE BROADCAST SYSTEMS:


- GPS Helicopter Systems
- Truck Microwave Systems
- Complete Portable Systems
 - Central Receive Sites
 - Digital Links
 - STL/TSL/ICR
 - Antennas

Demonstrations Available

BMS Broadcast
Microwave
Services, Inc.

5636 Ruffin Road • San Diego, CA 92123-6388
E-Mail: bms@bms-inc.com • Fax (619) 560-1637
http://www.bms-inc.com • Phone (619) 560-8601
1-(800) 669-9667

Complete ENG System Solutions from BMS Breaking News Demands Flawless Performance

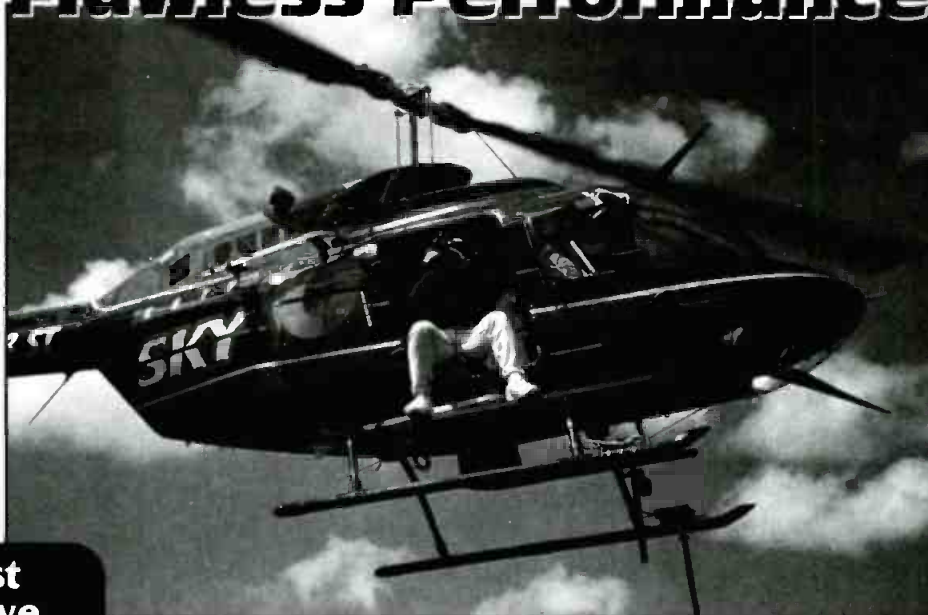

Unsurpassed performance and the latest in microwave technology means reliable broadcast systems for newsgathering teams around the globe. From airborne to remote, we manufacture complete ENG system packages. Custom configurations available.

Circle (57) on Free Info Card



MountainGate's CentraVision VDR interface.

taking advantage of the high-performance bandwidth of Fibre Channel, MountainGate has succeeded in making its CentraVision video disk recorder a next-generation solution.

A new concept

The innovative design of CentraVision's VDR incorporates traditional VTR functionality of DDRs. It is a new concept in that it treats VDR control and storage independently, allowing users to configure systems with the amount of storage they need, while permitting additional storage later without having to buy a new VDR. In keeping with the CentraVision philosophy of shared access, the VDR's recorded media can be shared among multiple users in a work group environment on a CentraVision Fibre Channel network. Standard VTR features include variable speed, slow-motion, four-channel digital audio and time code.

With the help of the new CentraVision file system and file system manager, the VDR now allows users to treat partitioned disk space like virtual tape. As a result, editors and artists have the ability to eject a vTAPE, or virtual tape, load another and begin working on the next project without delay. vTapes are disk partitions that are optimized for specific native video formats, such as eight- or 10-bit YUV (NTSC or PAL) or RGB. Other native formats are being developed, such as Quicktime, OMF and native support for DVD. Through the CentraVision implicit data-conversion facility, the native file formats are automatically converted to the file format expected by the applications.

Consider an example with two workstations, A and B, the CentraVision VDR and CentraVision Fibre Channel disk array. The CentraVision 72GB array is partitioned as vTAPE A and

vTAPE B. Workstation A, workstation B and the CentraVision VDR can have simultaneous access to vTAPE A. Both workstations see the tape as YUV files, while the VDR sees vTAPE A as a 25-minute capacity partition on the disk

array. Both workstations can render to files at the same time that the VDR can interface to an on-line suite and be operated through machine control.

When the vTAPE A project is completed, both workstations and the VDR can eject vTAPE A, as if ejecting a videotape and load vTAPE B. vTAPE A can then be off-loaded while work is being performed on vTAPE B.

The CentraVision VDR was designed to bridge the workstation and traditional video worlds, so the system's efficiency and flexibility extend to the on-line edit suites. For example, graphics created on one of the workstations and saved on a vTAPE can be immediately imported to an on-line suite via the CentraVision VDR.

The file system manager manages bandwidth on the system — assigning vTAPES to the varied work groups. It manages security issues in terms of read/write privileges and determines which vTAPES are mounted on which real-time devices (i.e., CentraVision VDRs). The CentraVision file manager is first being released for SGI, with NT, Macintosh and Sun cross-platform support to follow. As the file system is ported to Mac and NT, vTAPES will be accessible from all supported platforms simultaneously. For instance, rendering can be done on NT machines, while compositing is done on SGIU machines using the same media at the same time.

The CentraVision VDR offers a number of improvements over past VDR technology. Specifically, with CentraVision, VDR storage is now expandable because VDR control and storage are completely independent — the VDR storage becoming part of the overall storage of an entire CentraVision Fibre Channel network. Furthermore, with CentraVision, the VDR becomes a

SANIX®

new concept
"Capacitive-Discharge"
 800Hz PULSE GENERATION
BULK ERASERS
FAST
COMPACT
EFFICIENT
RELIABLY ERASE
METAL TAPES

All Models operate on 117V at 3 Amp.
 24 hour continuous duty, no heat build-up.



3800
 For BETA-CAM-SP
 Digital BETACAM, MII,
 VHS, Beta etc.
 1/2" w METAL-OXIDE

4800
 For D2(D1) M,
 BETACAM-SP,
 Digital BETACAM,
 U-matic, etc.
 3/4" w · 1/2" w
 METAL-OXIDE

5500
 For D2(D1), D3, D5
 Large and M-S
 3/4" w · 1/2" w
 all cassette
 METAL-OXIDE
 TABLE TOP MODEL

6000
 For D2(D1), D3, DCT
 Large and M-S
 3/4" w · 1/2" w
 all cassette
 Up to 1" w · 14" reel
 all Reel Type
 METAL-OXIDE
 MASTER ERASER

REQUEST FULL-LINE CATALOG

U.S.A. DISTRIBUTOR
RTI-RESEARCH TECHNOLOGY INT'L.
 4700 CHASE AVENUE
 LINCOLNWOOD, IL 60646 U.S.A.
PHONE: 847-677-3000
FAX : 847-677-1311

SANIX CORPORATION
 TOKYO, JAPAN FAX: 81-3-3702-9654

Circle (46) on Free Info Card

shared resource as multiple users in a work group can simultaneously access the VDR's recorded media. Finally, not only does the CentraVision VDR integrate VTR capabilities directly into the

workstation environment, it also brings true VTR functionality to VDRs with the addition of the eject button. The CentraVision VDR eject button allows vTAPes to be ejected on completion of

a job, so that new vTAPes can be loaded, permitting a smooth and efficient workflow within a facility. ■

Harry Aine is business development manager for MountainGate, Reno, NV.

Applied Technology

ASC's RAIDsoft

BY FRED SCHULTZ

RAIDsoft is ASC's exclusive software implementation of RAID protection against drive failures and a key-stone in ASC's larger design of system-wide redundancy.

RAIDsoft is an integral part of the software of every VR300 server, thereby allowing each server on the system

VR300, should one or more VR300s go off-line due to maintenance or failure, all remaining servers continue their activities unimpeded. Every remaining VR has full access to all material since each performs its own RAID-protected reads and writes.

But beyond the way RAIDsoft extends and streamlines existing RAID features, it also introduces a new level of protection — protection against multiple drive failures.

Conventional RAID-3 approach

Traditional implementations of RAID use a single parity drive that protects against failure of a single drive per RAID cluster. This is excellent as far as it goes, but it leaves the system vulnerable to total data loss should a second drive fail prior to rebuild of the first.

Because this conventional form of parity is satisfactory for many, ASC's RAIDsoft continues to make this configuration available. RAIDsoft even extends its economy by enabling a single parity drive to protect an unprecedented 32 drives instead of requiring one per group of four or seven drives as had previously been the industry's limits.

In conventional parity, data is organized into stripes of data pieces written onto data drives and a calculated parity piece onto a separate parity drive.

Hardware SCSI RAID controllers do not begin reading from the parity drive

until failure of a data drive is under way, so program delivery is disrupted even if it ultimately recovers.

RAIDsoft, in contrast, continually reads and decodes the parity information. This improves the capability of error detection, as well as data performance during error correction. In the process, RAIDsoft also monitors and logs the performance of all drives, which now makes possible pre-failure replacement.

And finally, unlike SCSI RAID, which must rebuild whole drives, RAIDsoft rebuilds only the necessary drive sectors that can immensely speed restoration of full protection.

New level of redundancy

Over and above extensions and enhancements to conventional parity, RAIDsoft introduces a new multiple parity protection — ECC Parity.

For the cost of a few additional parity drives, ECC Parity provides the full



RAIDsoft in a VR300 server.

to perform independent RAID-protected reads and writes to a single common array of shared Fibre Channel disk storage.

RAIDsoft offers two critical advantages over traditional hardware-based RAID:

First and foremost, since RAIDsoft operates from the server software, there is no dedicated RAID controller hardware to be purchased or serve as a single point of catastrophic system failure.

Second, since RAIDsoft is part of the native software in each and every

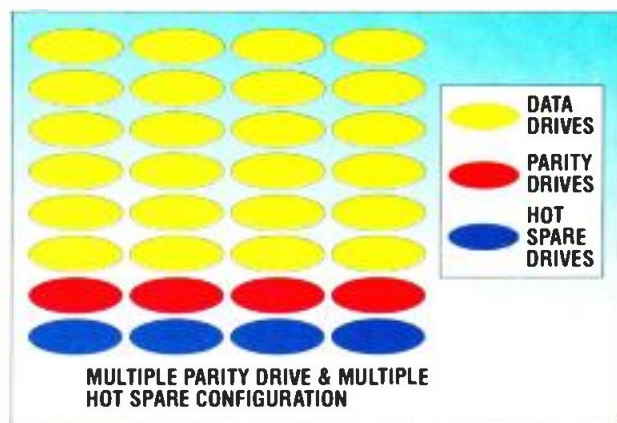


Figure 1. ASC's RAIDsoft implementation: ECC Parity's multiple parity drive and multiple hot spare configuration.

array with protection against not just one but two consecutive drive failures. With no separate hardware RAID con-



32nd SMPTE Advanced Motion Imaging Conference

**Migrating
Toward A
Networked
Digital Future**

Registration Form

	US Funds Before 1/23/98	US Funds After 1/23/98	CAN Funds Before 1/23/98	CAN Fund After 1/23/98
--	-------------------------------	------------------------------	--------------------------------	------------------------------

Please mark registration desired.

Full Conference - Member	\$385	☐	\$485	☐	\$520	☐	\$655	☐
Full Conference - Nonmember	485	☐	585	☐	655	☐	790	☐
Includes luncheon, reception, sessions and seminar.								
Conference Only - Member	\$250	☐	\$350	☐	\$338	☐	\$473	☐
Conference Only - Nonmember	350	☐	450	☐	473	☐	608	☐
Includes luncheon, reception and sessions.								
Full Conference - Student Member	\$50	☐	\$50	☐	\$68	☐	\$68	☐
Full Conference - Student Nonmember	75	☐	75	☐	101	☐	101	☐
Life Member/Life Fellow	\$50	☐	\$50	☐	\$68	☐	\$68	☐
Includes seminar and sessions.								
Seminar Only - Member	\$150	☐	\$250	☐	\$203	☐	\$338	☐
Seminar Only - Nonmember	250	☐	350	☐	337	☐	473	☐
Seminar Only - Student Member	25	☐	25	☐	34	☐	34	☐
Seminar Only - Student Nonmember	50	☐	50	☐	68	☐	68	☐

Social Events

Get-Together Luncheon	\$50	☐	\$50	☐	\$68	☐	\$68	☐
Partners Program	150	☐	150	☐	203	☐	203	☐
Evening Reception	50	☐	50	☐	68	☐	68	☐

Non-Members: Avoid paying \$100 more than Members by joining SMPTE now at the annual rate of \$95. Check here and add the \$95 annual membership fee to the Member Rate.

Membership credentials will be mailed	\$95	☐	\$95	☐	128	☐	128	☐
---------------------------------------	------	--------------------------	------	--------------------------	-----	--------------------------	-----	--------------------------

TOTAL AMOUNT DUE \$ _____ \$ _____ \$ _____ \$ _____

Changes & Cancellations

- Cancellations must be made in writing. A \$50 administrative fee will be incurred.
- No REFUNDS or CANCELLATIONS postmarked after January 23, 1998.
- All credit cards will be charged in U.S. dollars and converted to Canadian dollars.
- Registration credentials will be available for pickup on site.

**REGISTER
EARLY
& SAVE!**

Name _____
Company _____
Address _____
City _____ State _____
Country _____ Zip/Postal Code _____
Tel _____ Fax _____
SMPTE member? ☐ Yes ☐ No Membership Number _____

Payment Method

☐ Check enclosed (payable to SMPTE) ☐ MC ☐ Visa ☐ AmEx

Account # _____ Expiration Date _____

Name on card (please print) _____

Signature _____

**February 5-7, 1998
Sheraton Centre Hotel
Toronto, Ontario, Canada**

The SMPTE technical program will tackle industry developments associated with the digital disk storage of images and sound, and networking strategies for implementing and managing facilities for acquisition, edition, and airing of material for programmers.

Day-Long Seminar

Digital Television Standards Explained;
ATSC and DVB

SMPTE Sessions

- Digital Disk Technology
- Video Networking
- Strategies for Migrating into a DTV World
- Open Forum Panel Discussion

Return form to:

Fax: (914) 761-3115

Mail:
595 West Hartsdale Avenue
White Plains, NY 10607-1824

Web Registration:
<http://www.smppte.org>

Information: (914) 761-1100

- Use one form for each person
- Please print LEGIBLY or TYPE

troller that could serve as a single point of storage failure, the ECC Parity brings an unprecedented level of safety, redundancy and dependability to the storage of valuable content.

Implementation of ECC Parity is based on each server directly executing its own reads and writes to each of the individual drives, a capability available only in Fibre Channel disk drives. By advanced use of high-speed XOR processing and Hamming codes double data drive errors can be corrected, and single, unknown location data errors can be corrected.

For yet an extra level of redundancy, hot standby disk drives can be added to the array. (See Figure 1.)

In the event of a disk drive failure, the failed disk automatically goes off-line. An operator can then rebuild the RAID set using one of the hot spares by drag-and-dropping some very obvious, unambiguous icons. Rebuilding the RAID set takes place in the background with absolutely no impact on operations.

Tangible benefits

RAIDsoft eliminates the cost of a hardware RAID controller and the single-

point vulnerability it brings. RAIDsoft tracks drive health and provides less on-air disruptions in the event of failure.

For users of conventional parity, RAIDsoft can save the purchase cost of multiple unwanted parity drives and minimize exposure by speeding rebuilds. And users of ECC Parity get a double safety net so that a failed drive can be removed and replaced by appropriate personnel at appropriate times rather than becoming a do-or-die task forced upon a night operator. ■

Fred Schultz is product manager at ASC Audio Video Corporation, Burbank, CA.

Technology in Transition

New high-tech transmitters

As stations enter the digital arena, the first order of business is typically the selection of a digital transmitter. As any RF engineer knows, the term digital transmitter is really a misnomer. Even for DTV, whether that be HDTV or multichannel operation, the transmitter is still analog. It's the modulation encoding that's digital. With that in mind, what's the big deal with regard to the new types of transmitters?

Tubes vs. solid-state

The battle over amplifier technology is nowhere more hotly debated than with transmitter companies. The opinions held by the various transmitter manufacturers are not only strongly set forth, they are stoutly defended at industry events like the recent *Broadcast Engineering DTV* conference in Chicago. Let's look at the basics.

Three basic types of amplifier technology are used in transmitters: solid-state, grid-based tubes — the UHF tetrode and Diacode — and Klystron-based UHF devices. Each technology has its own set of advantages and limitations. The correct choice for your application may not be as clear as you'd like.

Many in the industry assumed that solid-state devices would quickly re-

place tubes in UHF transmitters. Well, that's happened to some degree in VHF transmitters, but not so with UHF transmitters. One problem for solid-state systems is their increased complexity — in other words, more parts. At least as of yet, there aren't any UHF 10,000W transistors so the only way to reach



The Thomson Tubes Electronics Diacode is able to provide twice the output power of a similar-sized tetrode through the use of a unique output circuit.

high power levels is to parallel a lot of smaller devices. Currently, three solid-state technologies are being closely followed: MOSFET, LDMOS and silicon carbide (SiC).

The old standby technology, grid-based tubes, still provide reliable oper-

ation in cost-effective configurations. The newcomer here is the Diacode. Developed by Thomson Tubes Electronics, the Diacode (see photo) is really a highly modified version of the UHF tetrode. The anode current is modulated by an RF drive voltage applied between the cathode and power grid.

The difference between a standard tetrode and the Diacode is that the latter provides an electrical extension of the output circuit to an external cavity. The output cavity is really a section of quarter-wave transmission line with a short at the top. This produces an open circuit (minimum current) at the vertical center of the tube and a maximum current at the base and the shorted section at the top of the tube. With two current maximums, the tube produces twice the power of an equivalent tetrode.

Klystron technology is well understood but, without additional circuits, it's not a terribly efficient RF solution. However, the addition of beam pulsing, multistage depressed collectors (MSDC) and the inductive output tube (IOT) (also known as the Klystrode by Varian) configurations have improved on the klystron's basic design.

When it's all considered, the key for digital applications in all these UHF

amplifier technologies is linear operation. The bottom line is that it doesn't matter how high the tube's AC-to-RF efficiency is, when it comes to DTV, the system won't work unless the tube is linear.

Selecting a transmitter

When faced with buying a new DTV transmitter, the engineer has a plethora of choices. After you've convinced yourself that one or more of the amplifier technologies will work in your application, what other points need to be considered?

- initial purchase price;
- on-going maintenance costs;
- AC-to-RF efficiency; and
- factory support.

Related factors that might need to be

carefully considered could include:

- transmitter size;
- power consumption; and
- cooling requirements.

TRANSMITTER MANUFACTURER	PHONE NUMBER	RS#
Acrodyne	800-523-2596	235
Advanced Broadcast Systems	800-499-4554	236
Comark	413-569-0116	237
Electronica Industriale	39-39-7398-1	238
EMCEE	717-443-9575	239
Harris	217-222-8200	240
Itelco	303-431-1699	241
Larcen-TTC	303-665-8000	242
Rohde & Schwarz	301-459-8800	243
Th omcast	33-1-3490-3100	244
AMPLIFIER DEVICES		
EEV	914-592-6050	245
CPI-Eimac	650-592-1221	246
Thomson Tubes Electroniques	201-812-9000	247
Litton Electron Devices	800-861-1843	248

Table 1. Here's a list of some transmitter and tube/device manufacturers to check out. Be sure you're comparing apples to apples when making evaluations. It's easy to get confused among the different ways companies spec their products. If you'd like some additional help, contact Dr. Digital via fax: 913-967-1905.

To help you better understand the options, a list of transmitter companies is presented on the left. Each can provide you with comprehensive information about their particular solution. Consider it along with what you can learn by talking to their other customers. Remember, if you have to buy a transmitter in the next year, you'll be among the first with a new technology. New designs often suffer from infant mortality, design changes and after-the-sale updates. Be prepared to work with

the manufacturer over the long haul. And, be sure you understand how much support you have a right to expect — after you've turned over the check. ■


GET YOUR MICROWAVE SHOT!

Having problems with pulling in those important microwave shots? Let Nucomm show you the solutions with our improved ENG Microwave Technology.

Nucomm, Inc. provides a full line of Video Microwave Equipment.

Nucomm not only provides equipment...we provide solutions.

NUCOMM INC.
MICROWAVE COMMUNICATION PRODUCTS
101 Bilby Road, Hackettstown, NJ 07840
(908) 852-3700

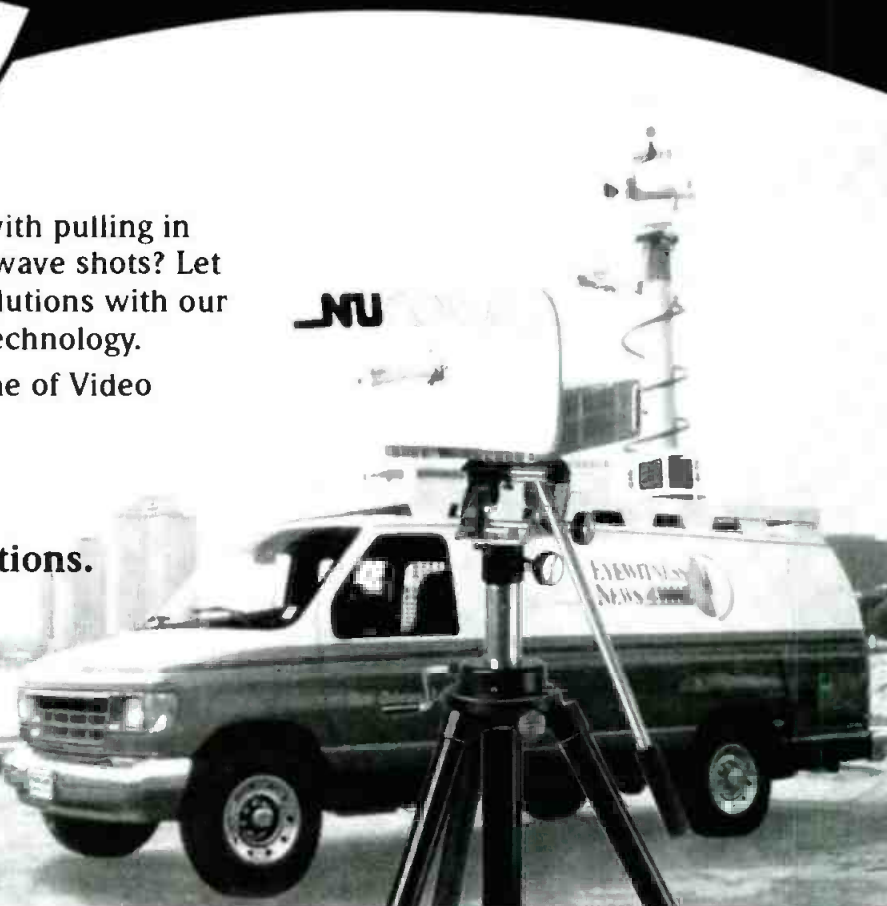

Circle (58) on Free Info Card

New Products

ENHANCED POSTBOX ELITE NON-LINEAR EDITING SYSTEM

Panasonic Postbox elite: the Postbox elite is enhanced with 40 innovative hardware and software improvements; the complete AV workstation integrates non-



linear editing with on-line component video quality, more than 300 real-time transition effects, real-time video filters, a character generator with roll/crawl/transition effects, a powerful paint system,

keying, graphics import and VTR control; Postbox elite runs dual streams of video, plus title key in real-time and renders unlimited layers; 201-392-6176; fax 201-392-6558; www.panasonic.com/pbds

Circle (252) on Free Info Card

SWITCHERS WITH WINDOWS NT

ECHOlabs production version of S000 series: the enhanced production version of the ECHOlabs 5000 series is a digital video switcher with an integrated server running Windows NT; it combines the power of a large 33-input switcher with integrated control of the latest open architecture video devices such as a 3-D DVE using a Pinnacle Genie card, a clip-store using DP5 Perception cards, and a CG and still-store from Inscrubber Technologies running on a Matrox DigiMix card; mixing enhancements make complex transitions easier and serviceability and modular growth flexibility have also been enhanced; 781-273-1512; fax 781-273-3275; www.echolab.com

Circle (275) on Free Info Card

MULTIROLE CAMERA SYSTEM

Philips LDK 100 series: this series of cameras offers the benefits of 12-bit A/D conversion, plus 24-bit, dynamically managed, digital processing; two digital signal processors combine all the camera functions in the digital domain, including knee,

gamma, contour and matrix; the series also features unique dual skin contour circuits

with automatic skin tone selection; continuous auto black provides perfect black levels and shading without the need for black balance and a specially adjusted matrix helps ensure excellent color reproduction when working under fluorescent lights; software upgrades can be downloaded from a PC via the standard serial RS-232 link by E-mail; 801-972-8000; fax 801-972-0837; www.philipsbts.com

Circle (255) on Free Info Card



INTERCOM SYSTEM

Telex Communications RTS Zeus 2400 DSP matrix

intercom system: the Zeus is designed to deliver 24 channels of better-than-CD-quality audio in a two-rack unit package; the CD-quality sample rate of 44.1kHz is enhanced by 20 bits of resolution yielding superior audio clarity; the heart of the system is the DTM ASIC, which processes 45-bit word length, ensuring full performance regardless of the number of users on a given path; 612-884-4051; fax 612-884-0043.

Circle (251) on Free Info Card



VIDEO DISK ARRAY

Accom WSD/2Xtreme: this long-play digital video storage device is designed for the computer video and TV post-production markets; it offers five minutes of storage, features eight- and 10-bit recording standard and comes in 10- and 20-minute versions at prices lower than previous WSD models; it provides fast Ethernet and SCSI computer interfaces and optional audio storage; 415-328-3818; fax 415-327-2511; www.accom.com

Circle (258) on Free Info Card



HDTV DIGITAL SIGNAL GENERATOR

Leader LT 440D HDTV digital signal generator: a test signal generator that operates in the 1125/59.94 HDTV system and complies with BTA S-004A, S-005A, S-006A and SMPTE 229M, 291M and 292M; front-panel switching allows selection of 1,135 or 1,180 lines displayed, as well as 1,125/60 operation (an option), test tone level and frequency and remote-control baud rate; the generator incorporates serial digital outputs of conventional and dedicated test signals that include the pathological checkfield and includes embedded four-channel AE5/EBU audio-test tones; 800-645-5104 or 516-231-6900

Circle (263) on Free Info Card



COMPACT ROUTING MATRIX

Grass Valley SMS-DV series high-density serial digital video routing matrix: it is fully compatible with the series 7000 control system and includes two compact, high-density serial video matrices — 128x128 and 256x256; two optional control panels, the SCP simple and the MB4 multibus are also available; 800-426-2200 or 503-627-7111; fax 413-448-8033; www.tek.com

Circle (265) on Free Info Card

DIGITAL MIXING CONSOLE

Studer On-Air 2000: this digital audio mixing console is fully digital and can be supplied with six, 12, 18 or 24 input channels and easily interfaces with any type of TV



broadcast environment; each input fader is assigned to a field on the console's multifunction LCD touchscreen that displays the

channel status via touch-sensitive icons; the central screen allows parameters to be set and modified directly via accompanying rotary control interfaces; 615-399-2199; fax 615-367-9046

Circle (266) on Free Info Card

FOUR-CHANNEL MPEG-2 DECODER

Vela Research four-channel MPEG-2 SCSI decoder: this four-channel rack-mount decoder is designed for ad insertion and near video on demand; it features a SCSI-2 fast/wide (optional UltraSCSI) interface with NTSC or PAL video outputs, and each channel is independently configurable with separate gen-lock inputs to allow the locking of video outputs to external video sources; each video channel operates independently to allow playback of different stream types, video resolutions, compression types (MPEG-1 or MPEG-2) and start/stop time; 813-572-1230 (ext. 7186); fax 813-573-2508; www.vela.com

Circle (253) on Free Info Card

MICROWAVE SYSTEM PLANNING SOFTWARE

Andrew Microwave System Planner (AMSP)

software: this software enables the rapid and accurate selection of the passive portions of a microwave system; it graphically facilitates system planning and equipment selection, such as choices of terrestrial



microwave antennas, waveguide, flex twists, connectors, accessories and pressurization; a point-and-click interface guides you through the system selection; 708-349-3300; fax 708-349-5222; www.andrew.com

Circle (256) on Free Info Card

500MHZ ANALOG SCOPE

Iwatsu TS-8500 ultrahigh writing speed analog oscilloscope: this oscilloscope features time base dual delay function, NTSC video output connection, wide bandwidth of DC to 500MHz and high-speed automatic setup; along with visual writing speed of 5div/ns and the ability to update displays to one million times per second, it also features an exclusive scan converter tube for the highest level of brightness in the history of analog scopes; high-speed storage capacity allows immediate storage of high-speed single-shot phenomena; 201-935-8486; 201-935-8533; www.iwatsu.com

Circle (260) on Free Info Card

PRODUCTS NOW SHIPPING



NON-LINEAR EDITING SYSTEM

Pixel Power Collage edit system: a non-compressed, non-linear editing system with

Collage functionality that provides real-time text and graphics layer; a standard ED Mediapack gives 36 minutes of non-compressed 4:2:2 video; includes dedicated operator control panel with assignable controls; +44 (0)1223 721000; fax +44 (0)1223 721111

Circle (279) on Free Info Card



ANIMATION ADD-ON MODULE

Inscriber CG/Xtreme: an animation add-on module that works with the open system character generator In-

scriber CG/Supreme allowing users to fly key-frame based multiple layer animations consisting of text, logos and to draw objects over spline-based flight paths; in the on-line mode, the animations play back in real time, complete with a full traveling linear key channel; 519-570-9111; fax 519-570-9140; www.inscriber.com

Circle (280) on Free Info Card



ADD FUR TO SURFACES IN STUDIO MAX

Digimation Shag: Fur is an environment plug-in that allows you to add fur to an object's surface inside Studio

MAX quickly and easily (even long hair can be added to a small degree); no real geometry is generated, but the fur can cast and receive shadows and highlights; you control where the fur is applied, as well as the density, color, thickness, direction and leaning and bending of the hairs; texture maps can be used for most options for even more control; 504-468-7898; fax 504-468-5494; www.digimation.com

Circle (281) on Free Info Card

HDTV UPCONVERTERS

Tekniche Juno range: a range of high-quality HDTV upconverters for the transition from SDTV to HDTV; these upconverters offer aspect ratio conversion and comprehensive noise reduction in a 2RU frame; other features include analog and digital outputs, full 10-bit resolution with 16-bit internal processing, multilevel noise reduction and built-in standards conversion capability; a flexible architecture allows a wide range of input and output standards; 201-784-2288; fax 201-784-3860; www.tekniche.com

Circle (282) on Free Info Card

B&H

PHOTO - VIDEO - PRO AUDIO

THE PROFESSIONAL'S SOURCE FOR PHOTO,

FOR ORDERS CALL:

800-947-9928

212-444-5028

OR FAX (24-HOURS):

800-947-9003

212-444-5001

Store & Mail Order Hours:
Sun 10-4:45 • Mon & Tues 9-6
Wed & Thurs 9-7:15
Fri 9-1 • Sat Closed

On the Web: <http://www.bhphotovideo.com>

QUICK DIAL 72 MILLER

Fluid Heads and Tripods

The silky, smooth action of each Miller Fluid Head is the product of the finest quality cast and machined parts functioning together in a fluid environment. They are engineering masterpieces, built to operate under extreme conditions. They're engineered to exceptionally fine tolerances and their mechanisms are protected effectively against ambient moisture and dust.

Miller 20-Series II Fluid Head

- Dynamic fluid drag control
- Sliding/quick release camera platform
- Weighs 4 lbs. - handles up to 22 lbs
- Counterbalance system compensates for nose heavy or tail heavy camera configurations and permits fingertip control of the camera throughout the full range
- Includes independent pan and tilt locks. Bubble level, dual pan handle carriers and integrated 75mm ball leveling



Miller 25-Series II Fluid Head

- 100mm ball level fluid head • Robust, lightweight, low profile design
- Quick release camera platform • Weighs 7lbs - handles up to 25 lbs
- Multi step fluid drag system and integrated counterbalance system provide ultra-smooth, repeatable pan and tilt fluid control and finger-tip camera balance for ENG camcorders, industrial CCD cameras or small studio cameras

#601-Lightweight Tripod

- Weighs 4.5 lbs. supports up to 30 lbs.
- Minimum height down to 24" maximum height to 57"
- Extremely portable. Folds down to 33"
- Engineered from thermoplastic moldings diecast alloy and hard anodized tubular alloy.
- Fast one turn, captive leg locks
- Includes 75mm (3") ball leveling bowl

#649-2-Stage Tripod

- Two extension sections on each leg. Operates at low levels as well as normal heights without the use of mini-locks
- High torque/rigidity, no pan backlash
- Weighs 6 lbs., supports 50 lbs. • Very portable. Folds to 27"
- Includes 75mm (3") ball leveling bowl

- System 20 #338** - Miller 20 Head, 601 Lightweight Tripod, On Ground Spreader
- System 20 ENG #339** - Miller 20 Head, 649 2-Stage Aluminum, On Ground Spreader
- System 25 #500** - Miller 25 Head, 611 Lightweight Tripod, On Ground Spreader
- System 25 ENG #502** - Miller 25 Head, 641 2-Stage Aluminum, On Ground Spreader

Vinten

Vision SD 12

Pan and Tilt Head with Serial Drag

- The Vision SD 12 head features "Serial Drag" pan and tilt system. Consists of a unique, permanently sealed fluid drag and an advanced lubricated friction drag. You achieve the smoothest pans and tilts regardless of speed, drag setting and ambient temperature.
- Patented spring-assisted counter-balance system permits perfect "hands-off" camera balance over full 180° of tilt.
- Instant drag system breakdown and recovery overcome inertia and friction for excellent "whip pans"
- Consistent drag levels in both pan and tilt axes.
- Flick on, flick off pan and tilt caliper disc brakes
- Greater control, precision, flexibility and "touch"
- Touch activated, time delayed illuminated level bubble
- Working conditions from as low as -40° up to +60°C
- SD 12 weighs 6.6 lbs and supports up to 35 lbs

Vision Two Stage ENG and LT Carbon Fibre ENG Tripods

The ultimate in lightweight and innovative tripods, they are available with durable tubular alloy (Model #3513) or the stronger and lighter, axially & spirally wound carbon fiber construction (Model #3523). They incorporate torque safe clamps to provide fast, safe & self-adjusting leg clamps

- "Torque Safe" requires no adjustment, its unique design adjusts itself when required, eliminating manual adjustment and maintenance and making for a much more reliable clamping system
- New hip joint eliminates play and adds rigidity
- They both feature 100mm leveling bowl, fold down to a compact 28", and support 45 lbs.
- #3513 weighs 6.5 lbs. • #3523 CF (Carbon Fibre) weighs 5.2 lbs

Vision 12 Systems

Vision 12 systems include #3364-3 SD 12 dual fluid & lubricated friction drag pan/tilt head, single telescoping pan bar & clamp with 100mm ball base

- SD-12A System**
 - SD-12 pan and tilt head
 - 3513-B Single stage ENG tripod with 100mm bowl
 - 3363-3 Lightweight calibrated floor spreader
- SD-12D System**
 - SD-12 pan and tilt head
 - 3513-3 Two-stage ENG tripod with 100mm bowl
 - 3314-3 Heavy duty calibrated floor spreader

VIN-5ST and VIN-10ST

- Compact & lightweight, they maintain Vision performance and quality
- Provide total stability and durability with payloads up to 33 lbs.
- VIN-5ST** includes Vision 5L fluid head, single stage toggle clamp tripod spreader and soft case
- Ideal for the latest generation of dockable and one-piece camcorders
- Compatible with all Vision accessories
- VIN-10ST** includes Vision 10L fluid head, single stage toggle clamp tripod spreader and soft case

QUICK DIAL 74 Canon

IF+ Series 1/2-inch & 2/3-inch Zoom Lenses

Canon's IF+ family of lenses are engineered to meet the needs of the next generation of broadcasting while meeting the standards of today. Besides having the widest wide angle lens available, the IF+ lens series have wider angles at shorter M.O.D. (Minimum Object Distance), provide higher MTF performance and incorporate Hi-UD glass for reduced chromatic aberration. In addition to superb optics they're all designed with Canon's "Ergonomic Grip" for fatigue free shooting over an extended time. IF+ lenses are your assurance of unsurpassed quality and performance for today and tomorrow

J15ax8B

A next generation internal focusing lens with the shortest M.O.D. and widest angle of any standard lens, the J15ax8B IRS/IAS is a standard ENG lens that lets you shoot in tight or restricted areas at the closest minimum object distance ever possible and capture more of the subject. It incorporates all the great features of IF+ lenses including a built-in 2X extender, high MTF performance, Hi-UD glass, square lens hood and Canon's "Ergonomic Grip"

J20ax8B IRS/IAS

Excellent for ENG, sports and production, the J20ax8B IRS/IAS lets you squeeze in shots from 8mm and still take you all the way out to 320mm with its built-in extender. It incorporates all IF+ features, plus it's the only lens (besides the J9ax28 IRS/IAS) with a built-in Polaris lens hood, enabling rotation of attached filters



JVC GY-X2B 3-CCD S-VHS Camcorder



- Newly designed three 1/2" CCD image sensors deliver 750 lines of horizontal resolution and superb signal-to-noise ratio of 62dB
- Micro-lens technology provides exceptional sensitivity of F8.0 at 2000 lux and LOLUX mode lets you shoot with almost no light! Shoot superb footage with excellent color balance at a mere 1.5 lux
- Variable Scan allows flicker-free shooting of a computer screen
- Full Time Auto White circuit lets you move from incandescent to fluorescent to outdoor lighting without changing white balance or the filter wheel
- Quick Record Mode - when turned on the camera is set to the auto iris even if lens is set at manual. Also activates Automatic Level Control and Extended Electronic Iris which provides both variable gain and variable shutter. Shoot continuously from dark room to bright outdoors without having to adjust gain, iris or ND filter
- Dual output system allows camera output to be connected directly to an external recorder

KY-D29 3-CCD Color Video Camera



One of the most sensitive cameras ever developed, the KY-D29 sets the standard for 3-CCD cameras and is also ideally suited for today's digital recording formats. With a sensitivity F1.1 at 2000 lux, the KY-D29 can shoot in light as low as a remarkable 0.35 lux. It also offers a signal-to-noise ratio of 65 dB (with its DNR function on), and delivers 850 lines of horizontal resolution. The exceptional resolution and sensitivity of the KY-D29 are achieved by three new 760,000 pixel 2/3" interline transfer (IT) CCDs, the highest pixel count in the industry.

All-New Digital Signal Processing

- Advanced 14 bit Digital Signal Processing (DSP) and 3-dimensional Digital Noise Reduction (3D DNR) circuitry make this camera ideal for acquisition with today's popular digital formats, especially JVC's revolutionary new Digital-S
- DSP within the camera provides astonishingly crisp, high quality images while minimizing analog distortions and noise. DSP also makes the camera more flexible and easy to use. It even smooths the transitions between gain and white balance settings so that viewers won't notice sudden changes of settings while the tape is rolling
- Digital signal processing is enhanced with new 3D digital noise reduction circuitry to make it even more practical. By mixing multiple frames to cancel out random noise, then using motion detection to minimize lag, JVC's exclusive 3-D DNR produces dramatic results, far superior to any other DSP camera

Super LoLux for Extremely Low Light Shooting

- Incredible new Super LoLux technology allows you to obtain a broadcast quality picture in light as low as 0.35 lux. This extraordinary low light capability is the best ever achieved, and is made possible by utilizing JVC's exclusive LoLux dual pixel readout technology (increasing gain by 6 dB without introducing noise) while at the same time doubling the pixel readout integration time to 1/30 second

Versatile Docking Capability

- Extremely high quality 4:2:2 digital recordings can be made by docking the KY-D29 to JVC's Digital-S BR-D40 dockable recorder. This digital combo produces recordings far superior to any component analog camcorder, or 4:1 digital camcorder. The KY-D29 also docks directly to JVC's BR-DV10 DV-format and BR-S422 S-VHS dockable recorders and auto dock to Betacam SP recorders using an adapter

Features for a Wide Range of Applications

- The KY-D29 is loaded with a wealth of high-performance features, making it ideal for a wide range of broadcast and professional applications. Built in continuous auto black (CAB) continuously takes a black balance setting and full time auto white for continuous compensation of color temperature changes, balance the camera in real time, all the time. This allows you to concentrate on getting the shot, and not on adjusting the camera
- Because different shooting situations require flexibility, the KY-D29 offers selectable vertical resolution. In the Standard Mode, the camera produces 380 TV lines of vertical resolution. However, in the "V-Plus" high vertical resolution mode, the camera puts out 420 TV lines of vertical resolution, allowing you to increase vertical resolution without sacrificing sensitivity or lag, while maintaining 850 TV lines of horizontal resolution
- Focusing is easier than ever with Accu-Focus. By momentarily decreasing depth of field, soft & critical focus is achieved instantly
- Commonly used features can be activated without having to scroll through layers of menus. Features such as shutter control, variable scan, black stretch, black compress, CAB, iris modes, Accu-Focus DNR and zebra are all menu-free. And for those times when events move so fast it prevents you from making any settings whatsoever, the KY-D29's Full Auto Shooting (FAS) mode controls all of the camera's requiring you control only the focus, zoom and trigger
- Other camera features include a built-in time date, built-in zebra level selection switch, an 1-stop display in the viewfinder, and a battery remaining display for Anton Bauer battery packs. A special Black Stretch/Black Compression circuit is also included

**\$500
Rebate
thru
12-31-97**

Panasonic

Broadcast & Television Systems

AG-DP800H SUPERCAM

S-VHS 3-CCD Digital Signal Processing Camcorder

- Three high-density 380,000 pixel CCDs with half-pitch pixel offset achieves 750 lines of horizontal resolution, S/N ratio of 60dB and sensitivity of 18 at 2000 lux. Additionally the Frame Interline Transfer (FIT) CCDs minimize vertical smear even in very bright illumination
- Digital Signal Processing circuitry provides four valuable benefits
 - 1) Consistently reliable up-to-spec performance
 - 2) Fine adjustment of a wide range of parameters
 - 3) Memory storage and instant recall of specific settings
 - 4) More flexible and higher quality image processing, easier maintenance
- Two Hi-Fi stereo audio channels with a dynamic range of 80 dB, as well as two linear audio channels with Dolby NR
- Has a 26-pin connector for convenient backup recordings using an additional VCR equipped with a 26 or 14-pin connector
- Phantom power can be supplied to an optional mic. Power can be switched off to prevent battery drain when not in use



WP-800H "LS" Package:

- DP-800H Supercam 3-CCD camera head with 1.5" electronic viewfinder and Anton Bauer Gold Mount battery plate
- Fujinon S14x7.5 BRM 14:1 servo zoom lens
- CC-S800 soft carrying case
- WV-01700 tripod mounting plate

DP-800H "XL" Package:

- DP-800H Supercam 3-CCD camera head w/1.5" electronic viewfinder and Anton Bauer Gold Mount battery plate
- Fujinon S14x7.5 BRM 14:1 servo zoom lens
- CC-H800 Thermodyne hard shell carrying case
- WV-01700 tripod mounting plate
- Two Anton Bauer Digital Trunkpack 14 batteries
- Anton Bauer 2-position quick charger

QUICK DIAL 72

sachtler

VIDEO 14/100 FLUID HEAD

- Sachtler Touch and Go System
- Integrated sliding battery plate
- Strengthened dynamic counterbalance in 2 steps
- Frictionless leak proof fluid damping with three levels of drag
- Vibrationless vertical and horizontal brakes
- Built in bubble for horizontal leveling

HOT POD TRIPOD SERIES

Especially developed for use in ENG, the Hot Pod Tripod is the fastest in the world. The central locking system is activated on all three legs at the same time, while the pneumatic center column easily makes it possible to have the lens at a height of over 7 feet. The elevation force of the center column is factory set and doesn't require any setup. When moving to another location it can be carried by its handle, located at the center of gravity



ENG TWO-STAGE TRIPOD SERIES

Sachtler two stage tripods have an enlarged height range (lower bottom and higher top position) so they are more universal. Legs can be locked in seconds with Sachtler's quick clamping. There are also heavy duty versions for extra stability. The heavy duty aluminum has a 20mm diameter tube vs. 16mm, and the heavy duty carbon fiber has a 24mm diameter tube vs. 22mm. All heavy duty two stage tripods have a folding tripod handle

NEW! Sachtler CADDY systems

Now Sachtler quality is available to low budget users. The price of a CADDY system includes the new 7-step dampened CADDY fluid head, ultra-light but rugged carbon fiber tripod, lightweight spreader and enter a soft bag or cover. The CADDY fluid head features an adjustable pan arm, 7 step adjustment for quick counter balance and the self locking Sachtler Touch and Go System

- CAD 01 Single Stage ENG Carbon Fiber System:**
 - CADDY Fluid Head • ENG Single Stage Carbon Fiber Tripod
 - SP 100 Lightweight Spreader • Transport Cover 100
- CAD 2A 2-Stage ENG Carbon Fiber System:**
 - CADDY Fluid Head • ENG 2-Stage Carbon Fiber Tripod
 - SP 100 Lightweight Spreader • Soft padded ENG Bag

Libec MATTHEWS

P100 Portable Pneumatic Pedestal

The P100 is a small size pedestal that offers great flexibility without taking up too much space. Featuring an advanced air pressure system, the P100 smoothly handles loads up to 66lbs, easily accommodating professional cameras used in a studio, ideal for CATV, small studios, event and wedding video as well as all kinds of industrial and institutional applications

Air Pressure System

- Air pump attached to the main body frame allows air to be pumped into a column anywhere and anytime - even while a camera is mounted on the pedestal. This allows you to check and adjust the air pressure while using the pedestal and avoid over-filling of air
- Air pressure can be gradually adjusted by discharging air through a bleed valve when too much air has been pumped into the column
- There is also a relief valve that automatically lets air out when air pressure inside the column exceeds the uniform value, bringing it below the uniform value
- Large double wheel "S" casters allow the P100 to move smoothly and quickly. Wheels and caster axles are easily fixed by the double stopper system
- A track lock mechanism locks the wheels of the pedestal so that it only moves in a desired position
- Cable guards prevent the casters from rolling over and becoming tangled in camera cables when the tripod is moved around in a studio
- Large steering wheel affords greater ease in handling when shifting columns up and down or when moving the pedestal
- Maximum and minimum height is 31" to 61". By attaching the optional LA-100 Low Angle Adapter to the dolly for shooting at low angles (height from the ground to mount is only 10")
- The column and dolly can be quickly disassembled for convenient transport. The column weighs 18 lbs., and the dolly 16 lbs



H80 Professional Fluid Head

- A premium fluid head, the H80 incorporates a patented drag control system that provides the smoothest pan and tilt available
- Unlike conventional drag systems that have click stops at predetermined points, Libec's Continuous Drag Control System provides minute control of drag tension, allowing smooth, rapid movements as well as very slow movements
- Continuous Counter Balance Control System provides optimum camera balance with tilt angles of 0° to 90°
- Designed to withstand the most demanding environments, the H80 is fully operational even in temperatures as low as -22°F
- H80 supports up to 37 lbs. and has a 100mm claw ball to simplify camera leveling



H70 Professional Fluid Head

- The H70's patented counter balance mechanism supports various operating configurations including stand-alone cameras, camcorders and studio cameras with large viewfinders. Perfect balance can be obtained with settings from 0 to 3, depending on camera weight (from 15 to 33 lbs.) and tilt angle
- Sliding balance plate features a locking mechanism and allow a total of 4 (100mm) of travel for camera balance. Has a 100mm claw ball



FOR A FREE MONTHLY CATALOG, CALL 800-947-6933, 212-444-8633 OR WRITE

VIDEO and PRO AUDIO



TO INQUIRE ABOUT YOUR ORDER:
800 221-5743 • 212 239-7765
OR FAX 24 HOURS:
800 947-2215 • 212 239-7549

New Address:
420 Ninth Ave. (Bet. 33rd & 34th St.)
New York, N.Y. 10001

B&H
PHOTO - VIDEO - PRO AUDIO

NRG

POWER VEST SYSTEM

The Power Vest combines the comfort and convenience of a photo-journalist style vest with the power of NRG's highest capacity power belt. Available in two styles: the Field model is designed for use in a field production environment, while the Event model is for shooting events where style is everything. The Field model is ruggedly constructed from black high density weathered ballistic nylon and has an open-cut style that makes it comfortable to wear in a variety of climates. Also has a highly adjustable design to fit almost any physical proportion. Internal and external pockets for blank tapes and accessories. A clear front window for a press pass or business card. D-rings for cables and microphones, and an integral padded camera rest on the right shoulder.

Clevers: concealed inside the vest is your choice of 12 volt 86 watt or 13.2 volt 95 watt hour nickel cad cell packs.

A control box on the front features dual power outputs (dual cigarette lighter or XLR or mixed).

7-stage "fuel-gauge" charge status indication and auto-reset short/circuit protection.

The Event model is very similar to the Field except in place of rugged leather and pockets it features shoulder to sternum black satin lux fabric. Worn under a suit coat, the Event model is indistinguishable from a formal dress vest and it still retains interior and four exterior pockets. Both vests include 300-series Charger (12 hrs.) and can be used with the optional Intelligent Fast Charger (this).



POWER CAN SERIES

For powering single or multiple pieces of 12v DC equipment for extended periods of time, nothing beats the power and convenience of NRG's Power-Can Series. It integrates an ultra-high capacity, high-discharge-capable UPS (powered and power cell), a world-wide fast charger, and computer-controlled monitoring system with display in a single rugged package. Connect up to four pieces of equipment simultaneously. From a night emergency scene to a wedding reception in the park, the Power-Can delivers ample power for extended running time.

Recharge in 8-10 hours by simply plugging the Power-Can into any source of AC power (90-250v AC).

LCD display shows discharge/charge status, voltage, etc.

An optional "Power Dial" allows the Power-Can to be rolled to any time of day.

Available in 18, 28 and 40 amp versions, each Power-Can has either 4 cigarette lighter connectors, four 4-pin XLR connectors or one of each.



MORITA

BSG-50 Blackburst/Sync/Tone Generator

The BSG-50 provides an economical means for generating the most common RS-170A video timing signals used to operate various video switchers, effect generators, TBCs, VCRs, cameras and video effect controllers.

- 6 BNC video/pulse outputs
- Now available 6 blackburst, 4 sync, 2 subcarrier
- Each sync output individually settable for composite sync, composite blanking H-drive or V-drive
- Separate buffer for each output-maximum signal isolation
- 100Hz 100ms sine wave audio tone output, locked to video
- Output can be easily configured to meet specific user and equipment needs.

CSG-50

Color Bar/Sync/Tone Generator

- Generates full SMPTE color bars, blackburst and composite sync signals
- Built-in timer can automatically switch to color bars after 30 or 60 seconds. Easy and convenient for producing tape leaders and stripping tapes with color bars and blackburst
- Front panel selection of full-field or SMPTE color bar patterns or color bars (blackburst) video output
- Includes crystal-controlled 100Hz 0dB audio tone output
- Output video sync, reference 1 KHz 0dB
- Audio tone switches to reference and color bars change to black when running 30 or 60 second timer
- Full RS-170A SC/H phased and always correct
- No adjustment required

WE STOCK THE FULL LINE OF MORITA PRODUCTS INCLUDING:

- WG-50 Window Dub Insert Generator/Insert
- TRG-50 Generator/Insert/Search Speed Reader
- TRG-50C Has all of the above plus RS-232 control
- VG-50 VITC Generator, LTC-VITC Translator
- VLT-50 VITC-to-LTC Translator
- VLT-50C VITC-to-LTC Translator / RS-232 Control
- RLT-50 Hi8 (EVO-960/965) LTC to LTC Translator
- TSO-50 NTSC Test Signal Generator
- SCT-50 Serial Control Tiller "Industrial" CG, Time-Date Stamp, Time Code Captioning
- SAQ-50 Safe Area, Convergence Pattern and Oscilloscope Line Trigger and Generator



GLIDECAM

V-16 AND V-20

Professional Camera Stabilization Systems

The GLIDECAM V-16 and V-20 Camera Stabilization Systems allow you to walk, run, go up and down stairs, shoot from moving vehicles and travel over uneven terrain without any camera instability or shake. Designed primarily for professional video and 16mm motion picture cameras, the Glidecam V-16 stabilizes cameras weighing from 10 to 20 pounds and the V-20 from 15 to 26 pounds. They are both perfect for shooting the type of ultra-smooth tracking shots that take your audience's and client's breath away - instantly adding high production value to every scene. With either of the "V" series stabilizers you'll be able to offer the type of professional shooting techniques that were previously available only to clients with full budgets. Whether you're shooting commercials, industrials, documentaries, music videos, news, or full length motion pictures, the Glidecam "V" series will take you where few others have traveled.

The Glidecam Support Vest

The lightweight and comfortable Support Vest can be adjusted to fit a wide range of operators. High endurance, closed cell EVA foam padding and integral 16 aluminum alloy create a vest which can hold and evenly distribute the weight of the Glidecam V-16 and V-20 systems across the operator's shoulders, back and hips. For safety, quick release high impact buckles allow the vest to be removed quickly.

The Three Axis Gimble

A free floating precision gimble incorporating integrally shielded bearings creates the super-smooth and pivotal connections between the front end of the Dyna-Elastic Arm and the Camera Mounting Assembly. The Three Axis Gimble provides the operator with finger tip control over fluid panning and rolling. A locking mechanism allows the Gimble to be placed at varying positions on the Central Support Post. Moving the Gimble effectively adjusts the Systems Center of Gravity. The upper portion of the Sled's Central Support post includes guide markings. These markings allow for accurate gimble positioning.



The Dyna-Elastic Arm

The Exoskeletal Dyna-Elastic Support Arm is designed to counteract the weight of the combined camera and Camera Mounting Assembly by employing high carbon alloy springs. The arm may be boomed up and down, as well as pivoted in and out, and side to side. It is the combined booming and pivoting action of the arm which creates the shock absorption necessary for ultra-smooth camera movement and mobility. The spring force is held adjustable to allow for varying camera weights. For safety, a Dual-Spring design is employed to reduce spring failure damage.



lowel

ViP Video Lighting System

Designed for video ViP systems, provide 55 to 500 watt capabilities, powered by AC or DC. Mount one on-camera, un-stand, or hand hold it. Some ViPs feature adjustable beam angles. All are light weight and convenient to use.

V-light

Efficient enough to light a small room yet small enough to fit in a large pocket. The V-light provides a broad key light, back light or fill light (with umbrella or gel).

- Extreme wide angle multi-use halogen source
- Mounts on stand, clamps boom, wall, window, door-top
- 500 watt, AC powered lamps not included

I-light

Battery powered light provides excellent fill light, eye-light, or high-lights, with good contrast control for news and documentary shooting.

- Small and lightweight (18 oz.) for on-camera use
- Multi-use 6.1 focusing range with 100 lamp (lamps not included)
- 55 or 100 watt (120V) DC
- Includes cigarette lighter connector or optional 4-pin XLR

Pro-light

Can be used as a low-level key or accent light, fill light (with diffusion), backlight or background light.

- Multi-use halogen, focusing/tilting controlled with one hand
- 125 or 250 watt AC, 100 watt 12 volt, or 200 watt 30 volt DC
- Optional cigarette, 4-pin and 5-pin XLR connectors
- Lamps not included

Complete line of Lowel lights, lighting kits and accessories in stock...Call

Tota-Light

Provides a base or bounce light, backlight, or background light. Use it with an umbrella or gel frame with a diffusion kit. It is an ideal fill light or small soft key or illumination for copy work.

- Multi-use halogen source with 360° no-yoke tilting
- Choice of 300, 500, 650 or 750 watt AC lamps (not included)
- Gull-wing reflectors close compactly for storage and travel

Omni-Light


Produces the ideal key or back-light and with diffusion or an umbrella, it becomes a great soft fill source. With accessories, hand-hold the Omni camera mount it, or choose from a wide variety of mounting systems.

- Multi-use halogen source provides a non-crossover beam
- Choice of optional quick-charge Super-Spot Reflector for exceptionally long throws at all voltages
- Choice of lamps: 420 or 500 watt 120v AC, 650 watt 220/240v AC, 250 watt 30 volt DC, 100 watt 12 volt DC (lamps not included)

DP System

Only 3.9 pounds the DP Light offers a very powerful key, back-light, or background light with or without diffusion. When used with its umbrella or diffusion, it provides a soft key, fill, or side light. It includes a #1 reflector for an 8.1 foot focusing range and a large cool operating hand grip and knobs.

- Multi-use halogen source with 170° no-yoke tilting
- Choice of 500, 750, or 1000 watts 120 volts
- 650 or 1000 watts 220/240 volts (lamps not included)



antonbauer

Logic Series DIGITAL Gold Mount Batteries

The Logic Series DIGITAL batteries are acknowledged to be the most advanced in the rechargeable battery industry. In addition to the comprehensive sensors integral to all Logic Series batteries, each DIGITAL battery has a built-in microprocessor that communicates directly with Anton/Bauer interactive chargers, creating significant new benchmarks for reliability, performance, and life. They also complete the communications network between battery, charger and camera. With the network in place, DIGITAL batteries deliver the feature most requested by cameramen: a reliable and accurate indication of remaining battery power.

DIGITAL PRO PACS

The ultimate professional video battery and recommended for all applications. The premium heavy duty Digital Pro Pac cell is designed to deliver long life and high performance even under high current loads and adverse conditions. Its size and weight creates perfect shoulder balance with all camcorders.

- DIGITAL PRO PAC 14 LOGIC SERIES NICAD BATTERY
- 14.4v 60 Watt Hours 5 1/8 lbs. Run time 2 hours @ 27 watts.
- 3 hrs @ 18 watts

- DIGITAL PRO PAC 13 LOGIC SERIES NICAD BATTERY
- 13.2v 55 Watt Hours 4 3/4 lbs. Run time 2 hours @ 25 watts.
- 3 hours @ 17 watts

DIGITAL TRIMPAC

Extremely small and light weight, the Digital Trimpac still has more effective energy than two NP style slide-in batteries. High voltage design and Logic Series technology eliminate the problems that cripple conventional 12 volt slide-in type batteries. The professional choice for applications drawing less than 24 watts.

- DIGITAL TRIMPAC 14 LOGIC SERIES NICAD BATTERY
- 14.4 v 43 Watt Hours 2 3/4 lbs.
- Run time 2 hours @ 20 watts 3 hours @ 13 watts

InterActive 2000 Power/Chargers

QUAD 2702/2401

Four-Position Power/Chargers

The lightest (and slimmest) unit featured four position chargers ever. They can last charge four Gold Mount batteries and can be expanded to charge up to eight. They also offer power from any AC input, all in a package the size of a notebook computer and weighing a mere four lbs! The 40 watt 2401 can charge ProPacs in two hours and Trimpacs in one. Add the Diagnostic/Discharge module and the QUAD 2401 becomes an all purpose power and test system. The 70 watt QUAD 2702 bundles all Power/Charger features in the ultimate professional power system.



Dual 2702/2401

Two-Position Power/Chargers

The DUAL 2701 (70 watt) and 2401 (40 watt) are sleek, rugged and economical two position Power/Chargers that have all the features of InterActive DC camera output and LCD display. The Dual 2701 will charge any Gold Mount battery in one hour. The Dual 2401 charges ProPac batteries in two hours and Trimpacs in one. Their compact lightweight package design makes them the ultimate travel Power/Chargers. They can also be upgraded with the Diagnostic/Discharge Module and/or with the Expansion Charge Modules to charge up to six batteries of any type.



PROFESSIONAL VIDEO TAPES



Professional Grade VHS			
PG-30	2.39	PG-60	2.59
SG-30	3.39	SG-60	3.99
ST-30	6.99	ST-60	7.49
Superior Grade Double Coated VHS			
H4715 S-VHS Double Coated			
PG-120	2.79	PG-120	2.79
SG-120	4.49	SG-120	4.49
ST-120	7.99	ST-120	7.99
M221 Hi 8 Double Coated			
Metal Particles		Metal Evaporated	
P630HMP	4.99	E63JHME	8.39
P660HMP	6.49	E66JHME	10.49
P6120HMP	8.49	E6120HME	13.99
M321SP Metal Betacam (Box)			
05S	17.95	10S	18.49
30S	22.95	60L	31.95
DP121 OVC PRO			
12M (Med.)	8.29	23M	9.99
63M	22.49	64L (Lg.)	23.99
123L		94L	43.99

maxell

Hi8 Metal Particle (XRM)			
P6-120 XRM			6.59
Broadcast Quality Hi8 Metal Particle			
P6-30 HM BQ	5.39	P6-60 HM BQ	6.09
P6-120 HM BQ			7.99
P/1 PLUS VHS			
T-30 Plus	1.69	T-60 Plus	1.99
T-120 Plus		T-160 Plus	2.69
HGXT-PLUS VHS (Box)			
HGXT-60 Plus	2.69	HGXT-120 Plus	2.99
HGXT-160 Plus			3.99
BQ Broadcast Quality VHS (Box)			
T-30 BQ	5.49	T-60 BQ	6.19
T-120 BQ		T-120 BQ	7.39
BQ Professional S-VHS (in Box)			
ST-31 BQ	7.19	ST-62 BQ	7.99
ST-126 BQ	8.39	ST-182 BQ	17.49
Betacam SP			
B5MSP	15.75	B10MSP	17.75
B30MSP	20.75	B60MSP	29.75
		B90MSP	46.45

Panasonic

Mini DV Tape			
AY DVM-30	9.99	AJ DVM-60	11.99
OVCPRO			
AJ-P12M (Medium)	8.49	AJ-P23M	9.99
AJ-P33M	13.49	AJ-P63M	22.99
AJ-P64L (Large)	24.99	AJ-P94L	34.99
AJ-P123L			44.99

SONY

Hi-8 Professional Metal Video Cassettes			
P6-30 HMPX	4.59	P6-30 HMEK	7.99
P6-60 HMPX	6.59	P6-60 HMEK	11.49
P6-120HMPX	8.89	P6-120HMEK	15.49
Hi-8 Metal Evaporated Editor (HMEAD)			
E6-30 HMEAD	10.49	E6-50 HMEAD	14.89
E6-120 HMEAD			20.19
PR Series Professional Grade VHS			
1-30PR	2.39	1-60PR	2.59
		1-120PR	2.79
PM Series Premier Grade Professional VHS			
T-30PM	3.49	T-60PM	3.99
		T-120PM	4.79
BA Series Premier Hi-Grade Broadcast VHS (in Box)			
T-30BA	3.59	T-60BA	3.99
		T-120BA	4.79
MQ Master Quality S-VHS (in Box)			
MQST-30	7.49	MQST-60	7.99
		MQST-120	8.39
BRS 3/4" U-matic Broadcast Standard (in Box)			
KCS-10 BRS (mini)	8.29	KCS-20 BRS (mini)	8.99
KCA-10 BRS	8.19	KCA-20 BRS	8.69
KCA-30 BRS	9.69	KCA-60 BRS	13.39
XBR 3/4" U-matic Broadcast Master (in Box)			
KCS-10 XBR (mini)	8.79	KCS-20 XBR (mini)	10.19
KCA-10 XBR	9.29	KCA-20 XBR	10.69
KCA-30 XBR	11.99	KCA-60 XBR	15.69
KSP 3/4" U-matic SP Broadcast (in Box)			
KSP-S10 (mini)	9.59	KSP-S20 (mini)	11.09
KSP-10	10.09	KSP-20	11.59
KSP-30	12.99	KSP-60	16.99
BCT Metal Betacam SP Broadcast Master (Box)			
BCT-5M (small)	14.99	BCT-10M (small)	15.99
BCT-20M (small)	17.99	BCT-30M (small)	18.99
BCT-30M	21.49	BCT-60M	27.99
		BCT-90M	41.99
Mini DV Tape			
DVM-30EXM w/Chip	15.99	DVM-60EXM w/Chip	19.95
DVM-30EX "No Chip"	12.99	DVM-60EX "No Chip"	14.99
DVM-30PR "No Chip"	9.99	DVM-60PR "No Chip"	12.99
Full Size DV Tape with Memory Chip			
DV-120MEM	29.95	DV-180MEM	34.95
PVD Series Professional DVCAM Tape			
PDVM-12ME (Mini)	24.95	PDVM-22ME (Mini)	26.95
PDVM-32ME (Mini)	29.95	PDVM-40ME (Mini)	31.95
PDV-64ME (Standard)	39.95	PDV-94ME (Standard)	44.95
PDV-124ME (Standard)	49.95	PDV-184ME (Standard)	59.95

SEVEN DAY CUSTOMER SATISFACTION GUARANTEE

Circle (47) on Free Info Card

www.americanradiohistory.com



THE PROFESSIONAL'S SOURCE FOR PHOTO,

FOR ORDERS CALL:

800-947-9928

212-444-5028

OR FAX (24 HOURS):

800-947-9003

212-444-5001

**MOST ORDERS SHIPPED
WITHIN 24 HOURS**

OVERNIGHT SERVICE AVAILABLE

On the Web: <http://www.bhphotovideo.com>



Panasonic

WJ-MX50 Digital A/V Mixer

- Four input switcher and any two sources can be routed to the program buses
- Two-channel digital frame synchronization permits special effects in each A/B bus
- Combination of 7 basic patterns and other effects creates 287 wipe patterns
- External edit control input for RS-232 or RS-422 serial control. Also has GPI input
- Wipe boundary effects: soft/border (bold, 8 background colors available)
- Digital effects: strobe, still, mosaic, negative/positive, paint, monochrome, strobe, trail, and AV synchro
- Real-time compression - entire source image is compressed inside a wipe pattern
- Scene Grabber - move a pattern while upholding the initially trimmed-in picture integrity
- Non Additive Mix (NAM): selects between A and B sources, passing only the signal with the highest luminance value
- Fade-in and fade-out video, audio, titles individually or synchronously faded
- Down stream keyer with selectable sources from character generator or external camera
- Eight separate memories enable instant recall of frequently used effects
- 8 preset effects including: Mosaic Mix, Position Stream, Corkscrew, Bounce, Flip, Shutter, Vibrate, and Satellite
- Audio mixing capability of 5 sources with 5 audio level adjustments



BT-S1360Y

13" Color Video Production Monitor

The BT-S1360Y is a full-function, professional 13" production monitor with a wealth of features. They include: superb 420-line horizontal resolution, S-Video input and output, advanced automatic white balance circuitry, blue-only mode, underscan and pulse-cross. All this, housed in a rugged rack mountable metal-hybrid cabinet. So, for long-term reliability in any professional application, the BT-S1360Y is the ideal choice

- Incorporates advanced, proprietary white balance circuitry that stabilizes white balance to provide outstanding picture performance automatically
- S-Video input and advanced video circuit technology provides a remarkably sharp picture with over 420 lines of horizontal res
- External sync inputs and outputs provide for synchronization with other equipment tied with the same sync signal
- Blue Only mode plus Chroma selection provide a monochrome image for fine adjustment of contrast, brightness, chrominance & hue
- Pulse Cross - displays horizontal and vertical intervals at the center of the screen so you can examine data in the blanking area and also sync/burst timing
- Two sets of video audio inputs and outputs

- Underscan - shrinks the scanned area of the picture tube approximately 5% enabling the entire active picture area to be displayed. Lets you detect intruding cameras and mike booms
- Switchable color temperatures of 6500°K (broadcast standard) or 9300°K (for pleasing picture)
- Built-in speaker and headphone jack
- Rack-mountable with optional BA-131 brackets



BT-S 1360Y Olympic Demo Special!

We have a limited stock of BT-S1360Y monitors that were used by Panasonic exclusively at the 1996 Olympics in Atlanta. Used only by Panasonic engineers in broadcasting the summer games, these monitors are like new.

Demo Special \$599

(\$400 less than our regular selling price on this monitor)

SONY

PVM-14N1U/14N2U & 20N1U/20N2U

13" & 19" Presentation Monitors

With high quality performance and flexibility, Sony's presentation monitors are ideal for any environment. They use Sony's legendary Trinitron CRT and Beam Current Feedback Circuit for high resolution of 500 lines as well as stable color reproduction. They also accept worldwide video signals, have a built-in speaker and are rack mountable. Four models, the PVM-14N1U/20N1U are designed for simple picture viewing, the PVM-14N2U and 20N2U add RGB input and switchable aspect ratio for more sophisticated applications

They Feature:

- 500 lines of resolution to match DV, DVCAM and DVCPRD recording capabilities
- Beam Current Feedback for color temperature stability
- They handle four worldwide color systems: NTSC, NTSC 4.43, PAL and SECAM
- On screen display in five languages. Picture adjustments (chroma, phase, contrast, brightness) and setup adjustments (volume, aspect ratio) are displayed as easy-to-read on screen menus
- Built-in speaker for small audiences without the expense of an external sound system

- Closed captioning is available with the optional BKM-104 Caption Vision Board
- Designed with a sturdy metal cabinet for stability, durability and rack mounting. The 13-inch series mount in a 19-inch rack with the MB-502B Rack Mount Bracket. The 19-inch monitors with the SLR-103A Slide Rail Kit
- PVM-14N2U/20N2U Only
- Remote Control (Last Input Switch) - Contact closure remote control allows you to wire a remote to an existing system so that the monitor's input can be remotely controlled to switch between the last previously selected input and the current input
- With the PVM-14N2U and PVM-20N2U Series, the aspect ratio is switchable between 4:3 and 16:9 simply by pressing a button



PVM-14M2U/14M4U & 20M2U/20M4U

13" & 19" Production Monitors

- Sony's best production monitors ever, the PVM-M Series provide stunning picture quality, ease of use and a range of optional functions. They are identical except that the "M4" models incorporate Sony's state-of-the-art HR Trinitron CRT display technology and have SMPTE C Phosphors instead of P22
- HR Trinitron CRT enables the PVM-14M4U and 20M4U to display an incredible 800 lines of horizontal resolution. The PVM-14M2U and 20M2U use an aperture grille dot pitch of 0.25mm to offer 600 lines of resolution. M4 models also use SMPTE-C phosphors for the most critical evaluation of any color subject
- Dark unit for a higher contrast ratio (black to white) and crisper, sharper looking edges
- Beam Current Feedback Circuit - 4:3/16:9 switchable aspect ratio
- Each has two composite (BNC), one S-Video and component input (R-Y-B-Y, analog RGB) for flexibility. For more accurate color reproduction, the component level can be adjusted according to the input system. Optional serial digital interface kit BKM-101C (video) and BKM-102 (audio) for SMPTE 299M component serial digital input
- True multi-system monitors they are equipped to handle four color system signals: NTSC, NTSC 4.43, PAL, and SECAM

- External sync input and output for synchronization with other equipment. Can be set so that it will automatically switch according to the input selected
- Switchable color temp: 6500K (broadcast), 9300K (pleasing picture), User preset (3200K to 10000K)
- Underscan and H/V delay capability. In underscan mode the entire active picture area is displayed, allowing you to view the entire image and check the picture edges. H/V delay allows viewing of the blanking area and sync/burst timing
- Using color bars as a reference, Chroma/Phase setup mode facilitates the complex, delicate procedure of monitor adjustment. Especially convenient when used with computer-based editing systems
- On-screen menus for monitor adjustment/operation
- Parallel remote control and Tally via 20-pin connector
- Sub control mode allows fine, on-screen adjustment of the center "detent" value of the contrast, brightness, chroma and phase knobs
- PVM-14M2U/14M4U mount in a 19-inch rack with the MB-502B Rack Mount Bracket. The 20M2U/M4U monitors mount with the SLR-103A Slide Rail Kit



SENNHEISER

Condenser Microphones

Unlike traditional condenser microphones, the capacitive transducer in Sennheiser condenser microphones is part of a tuned RF discriminator circuit. Its output is a relatively low impedance audio signal which allows further processing by conventional bi-polar low noise solid state circuits. Sennheiser microphones achieve a balanced floating output without the need for audio transformers, and insure a fast, distortion-free response to audio transients over an extended frequency range. The RF design yields exceptionally low noise levels and is virtually immune to humidity and moisture. The comparatively low RF-voltage across the elements of the transducer also eliminates arcing and DC-bias creeping currents. Sennheiser employs RF-technology to control residual microphone noise. Optimizing the transducer's acoustic impedance results in a further improvement in low noise performance. Sennheiser studio condenser microphones operating at this RF-principle have proven their superior ruggedness and reliability in the past decades under every conceivable environmental condition.



MKH 40 P48U3

Cardioid

- Highly versatile, low distortion push-pull element
- Transformerless RF condenser, high output level
- Transparent response, switchable proximity EQ. Recommended for most situations, including digital recording, overdunding vocals, percussive sound, acoustic guitars, piano, brass and string instruments, Mid-Side (M-S) stereo, and conventional X-Y stereo. Vocals when used with a pop-screen

MKH 60 P48U3

Short Shotgun

- Short interference tube RF condenser
- Lightweight metal alloy, transformerless, low noise, symmetrical capsule design
- Smooth off-axis frequency response. Handles extremely high SPL (135 dB). Ideal for broadcasting, film, video, sports recording, interviewing in crowded or noisy environments. Excellent for studio voiceovers

Digital Multi-Track Recording

TASCAM DA-88

- ATF system ensures no tracking errors or loss of synchronization. All eight tracks of audio are perfectly synchronized. It also guarantees perfect tracking and synchronization between all audio tracks on all cascaded decks - whether you have one deck or sixteen (up to 128 tracks!)
- Incoming audio is digitized by the on-board 16-bit D/A at either 44.1 or 48KHz. The frequency response is flat from 20Hz to 20KHz while the dynamic range exceeds 92dB
- Execute seamless Punch-ins and Punch-outs. This feature offers programmable digital crossfades, as well as the ability to insert new material accurately into light spots. You can even delay individual tracks to generate special effects or compensate for poor timing



SONY PCM-800



- Flawless sound quality, outstanding reliability and professional audio interlacing with AES/EBU digital I/O and XLR analog I/O connections
- Combines audio functions such as precise auto punch in/out digital cross fade technology, external synchronization with SMPTE EBU time code and selectable sampling frequencies of 44.1 and 48KHz
- Shuttle dial for precise tape control, variable speed playback of 6% in 0.1% increments and a flat frequency response from 20Hz to 20KHz
- Operate up to 16 PCM-800's in perfect sync with optional RCC-S1 sync cables for up to 128 channels of digital audio recording
- Optional DABK-801 Sync Board provides SMPTE EBU time code generation and chase sync. It locks to the incoming time code with subframe accurate offset - ideal for audio-follow-video applications. Also synchronizes to external video reference signal
- Optional RIM-D800 provides comprehensive remote control over all PCM-800 functions. The RIM-D800 can control up to 16 units for up to 48 channels of digital audio

ALESIS adat xt

8-Track Digital Audio Recorder

An incredibly affordable tool, the ADAT-XT sets the standard in modular digital multi-track recording. With new features and enhanced capabilities, the ADAT-XT operates up to four times faster than the original ADAT, offers an intelligent software-controlled tape transport and provides onboard digital editing and flexible auto-location.

- Onboard 10-point autolocate system provides quick access to multiple tape locations. Four specialized locate points make your recording sessions quicker and easier
- Includes remote control with transport and locate functions
- Offers a footswitch jack for hands-free punch-in
- Advanced transport software continuously monitors auto-location performance and the head constantly reads ADAT's built-in sample-accurate time code - even in fast wind modes
- Dynamic Braking Software lets the transport quickly wind to locate points while gently treating the tape
- Servo-balanced 56-pin ELCO connector operates at -4dB to interface with consoles with +4 dB balanced inputs/outputs. Also unbalanced -10dB inputs/outputs (phono connectors)
- Has an electronic patch bay built-in so it can be used with stereo and 4-bus consoles
- Make flawless copy/paste digital edits between machines or even within a single unit. Track Copy feature makes a digital clone of any track (or group of tracks) and copies it to any other track (or group) on the same recorder. This allows you to assemble composite tracks for digital editing



4-Channel Digital Audio Card for Windows

The next generation in digital audio for the desktop, StudioCard is a premium-quality digital audio adapter with advanced features, studio-quality specs and professional connections. Unmatched in quality, flexibility and expandability, it features 4 tracks of audio sound and real-time digital mixing capability, making it the ideal board for musicians who want digital multitrack recording and mixing on their PC, or producers looking for a versatile board for post-production digital audio editing and uncompromised audio quality. StudioCard is Windows 95 plug and play compatible plus includes drivers for Windows NT as well.

- Key to StudioCard's amazing sound is the marriage of a low noise analog I/O section and high quality A/D and D/A converters. A PCI-based 32-bit memory mapped board, it delivers less than 0.0003% total harmonic distortion and 92dB dynamic range. Plus, a PLL-based sample clock generator that can be locked to an assortment of clock sources
- Incorporates a programmable 32-bit 40 MHz DSP and pro connections like 4 independent balanced analog I/Os (-4dBu or -10 dBu) and AES/EBU or S/PDIF digital I/O. It also offers a MIDI port with de-emphasis and time stamping. No matter which type of equipment you have StudioCard will integrate into standard studio environments

- Compatible with film, video or MIDI. StudioCard offers synchronization via SMPTE, LTC, word and pixel clocks, and composite video. Plus, the StudioCard not only reads SMPTE timecode, but generates it as well
- Unique to the Anix design is StudioCard's multiple adapter capability. This means you can install multiple StudioCards in a single computer for up to 16-track recording. Start with one StudioCard today - add more StudioCards tomorrow. Also included is an on-board S/P expansion connector for plugging in optional daughtercards for compression or enhanced DSP operations

VIDEO and PRO AUDIO



TO INQUIRE ABOUT YOUR ORDER:
800 221-5743 • 212 239-7765
OR FAX 24 HOURS:
800 947-2215 • 212 239-7549

New Address:
420 Ninth Ave. (Bet. 33rd & 34th St.)
New York, N.Y. 10001



KNOX VIDEO

RS4x4/8x8/16x16/16x8/12x2 Video/Audio Matrix Routing Switchers

Knox's family of high performance, 3-channel routing switchers are extremely versatile and very affordable. Housed in an ultra-thin rackmount chassis, they accept and route (on the vertical interval) virtually any video signal, including 1-line-air and non-timebase corrected video. They also route balanced and unbalanced stereo audio. The audio follows the video or you can route the audio separately (breakaway audio). Each of the switchers offers easy manual control via front panel operation. They can also be controlled remotely by a computer, a Knox RS Remote Controller, or by a Knox Remote Keyboard via their RS-232 port. Front panel LEDs indicate the current routed pattern at all times, and an internal battery holds the current pattern in case of power interruption. Totally versatile, Knox switchers are ideal for applications such as studio-led control and switcher input control. Plus they have an internal timer allowing timed routing of patterns for surveillance applications as well.

- Accepts and routes virtually any one-volt NTSC or PAL video signal, including off-the-air and non-timebase corrected video outputs.
- Accepts and routes two-volt mono or stereo unbalanced audio inputs to any of all audio outputs.
- Video and audio inputs can be routed independently (breakaway audio), they don't need to have the same destination.
- Can store and recall preset cross-point patterns. (Not available on RS12x2.)
- Front panel key-pad operation allows easy manual operation.
- Can also be controlled via RS-232 interface with optional RS Remote Controller or Remote Keyboard.
- Internal battery holds the current routed pattern in case of power interruption.
- Front panel LEDs indicate the present routing patterns at all times.



- An internal battery remembers and restores the current pattern in case of power failure.
- Internal vertical interval switching firmware allows on-air switching.
- Housed in a thin profile rackmount 1U chassis.
- Also except the RS12x2 are available in S-Video versions with/without audio.
- Models RS16x8 and RS16x16 are also available in RGB/component version.
- With Optional Remote Video Readout, the RS16x8 and RS16x16 can display active routes on a monitor at remote locations via a composite signal from a BNC connector on the rear panel.
- The RS4x4, RS8x8 and RS16x16 are also available with balanced stereo audio. They operate at 600 ohms and handle the full range of balanced audio up to 4 ohm with professional quick-connect, self-locking, bare-wire connectors.




StudioFrame Modular Video Processing System

The Nova StudioFrame Series is a modular, flexible, digital analog processing system. It is designed to efficiently and effectively combine a wide variety of individual functions (or processors) boards such as A-D and D-A converters, video signal encoders and decoders, audio and video distribution amplifiers and frame synchronizers into more complex function groups, all in one equipment rack. The scalable nature of the StudioFrame design allows it to be easily reconfigured and/or upgraded as standards and requirements continue to evolve. The system is used on two rackmount frame models (the SF-3 and SF-1) allowing up to thirteen front loading processor boards and thirteen front loading passive interface cards to be accommodated in a single chassis. Both the StudioFrame SF-1 and SF-3 chassis are designed to meet the most stringent broadcast requirements. The SF-3 is a thirteen slot 3RU chassis while the SF-1 is a four slot 1RU chassis. All studio cards as well as the two chassis are backed by a two year warranty on parts and labor with guaranteed 24-hour turnaround service. The units are ruggedly constructed to endure studio rackmount, production van and DB (Outside Broadcast) mobile applications. A universal power supply operates at either 110 or 240 VAC, 50/60 cycle. DC operation is optionally available as is a redundant supply with automatic switchover. Dual exhaust fans maintain proper airflow and cooling. Hot swappable front card loading allows power-on removal/reinsertion of individual processing modules without disturbing others in the system. All cabling can remain in place while you service any module. An intelligent "centerplane" provides power, sync, timing and data distribution, facilitating expansion to more complex, more cost-effective signal processing functions.



NovaASD/NovaSDA Analog to Serial Digital & Serial Digital to Analog Converters

Component cards of the Nova StudioFrame Series, the NovaASD and the NovaSDA incorporate the latest digital video processing techniques for high speed A-D and D-A signal conversion. They are designed to meet the most stringent broadcast requirements and their "hot swappable" front card loading facilitates servicing without disturbing other cards in the system. The NovaASD is ideal for interlacing analog video signals with digital video formats and the NovaSDA for interlacing serial digital signals with analog video.



SDA-1 Serial Digital Component to Analog Component Converter

- SMPTE 259M 4:2:2 Serial Digital Component (D1) input.
- Equalized and reclocked serial digital component output.
- Analog component video (Y, R-Y, B-Y, YUV) 4:3 or RGB/S inputs.
- 10-bit D/A converters.
- Output level control.
- NTSC and PAL compatible.

SDA-2 Serial Digital Component to Composite and S-Video Converter

- SMPTE 259M 4:2:2 Serial Digital Component (D1) input.
- Equalized and reclocked serial digital component output.
- Dual composite & dual S-Video outputs.
- Color bar output selectable.
- 10-bit D/A converters.
- Output level control.
- NTSC and PAL compatible.

SDA-3 Serial Digital Composite to Analog Video Converter

- SMPTE 259M Serial Digital Composite (D2/D3) input.
- Equalized and reclocked serial digital composite output.
- Four analog composite video outputs.
- Color bar output selectable • 10-bit D/A converters.

ASD-1 Analog Component to Serial Digital Component Converter

- Analog component video (Y, R-Y, B-Y, YUV) 4:3 or RGB/S input.
- Dual SMPTE 259M 4:2:2 Serial Digital Component (D1) outputs.
- 10-bit D/A converters.
- Picture positioning control.
- NTSC and PAL compatible.

ASD-2 Analog Composite and S-Video to Serial Digital Component Converter

- Analog composite and S-Video input.
- Dual SMPTE 259M 4:2:2 Serial Digital Component (D1) outputs.
- 10-bit D/A converters.
- NTSC and PAL compatible.

ASD-3 Analog Composite to Serial Digital Composite Converter

- Analog composite video input.
- Dual SMPTE 259M 4:2:2 Serial Digital Composite (D2/D3) outputs.
- 10-bit D/A converters.
- Input gain adjustment.

NovAMNR Median Noise Reducer

The NovAMNR is a StudioFrame card that eliminates impulse and transmission noise, cleans up satellite, microwave and fiber feeds and fills in drop-outs and time-based corrected videotape drop-outs. It features full bandwidth, uncompressed 10-bit digital processing for ultimate video transparency as well as analog composite inputs and outputs.

- Eliminates "sparkles" those black and white dots that sometimes appear on remote video feeds. The NovAMNR incorporates a proprietary adaptive three-dimensional median filter that analyzes pixels from several fields of video and replaces the impulse noise with uninterpolated clean video.
- Universal drop-out compensation replaces missing video information, whether it is from a time-base-corrected VCR source or the decoded output of a CODEC feed. The NovAMNR effectively fills in drop-outs with replacement video from the surrounding pixels of the previous video field.

NC-8 RGB/Component to Composite/S-Video Encoder

- Zero bit processing, 8-bit D/A conversion.
- Two input delay, frame of memory.
- Two composite and one S-Video output.
- Analog inputs (E Sync on Green or all three), RGB Sync and YUV (Broadcast) inputs. Also available with looping inputs.
- Variable luminance notch filter.
- Y and C comb filtering for maximum encoding performance.

- Remote serial control • Output level control.
- Color bar output selectable.
- Designed to meet the most stringent broadcast requirements.
- Hot swappable front card loading facilitates servicing without disturbing other cards.
- Available in PAL and PAL-M versions.

VIDEONICS Animated Postscript Character and Graphics Generator



The most advanced character generator ever designed for video production, multimedia and industrial applications, PowerScript delivers the huge range of titles and graphics supported by PostScript display technology. Plus animation, effects, transparency and color keying. It features two GPI inputs, anti-aliased, 17.5 ns (nanosecond) pixel resolution and 4:2:2 broadcast-quality video. It also offers high-speed RISC processing to provide real-time Level 2 PostScript imaging and fast rendering—even with the most complex images. The PowerScript works stand-alone or with a computer, has a built-in IBC, offers a powerful and intuitive interface, and is suitable for the desktop or can be rackmounted.



Powerful Character Generator

- Choose from 35 built-in fonts or download PostScript fonts from your PC. PowerScript's high speed RISC processor provides real-time PostScript imaging.
- Characters can be rotated at any angle, scaled to any size, stretched horizontally or vertically.
- Styles include variable bold and italic, underline and shadow, drop shadow, variable displacement and opacity. Each character can be adjusted separately.
- Text can be positioned anywhere on the screen or automatically centered vertically or horizontally. Left, right, top, bottom and center justification is also provided.
- Characters are automatically kerned using the font's standard kerning information. Spacing is highly flexible with variable word and letter spacing and line spacing (leading).

Intuitive User Interface

- Built-in real-time object-based drawing tool and text editor—no computer or software required. Design can be done ahead of time and displayed later, or can be done on the fly.
- Supplied keyboard and mouse are used with easy on-screen menus to place and modify graphics and text.
- Change fonts, colors, and other characteristics instantly.

Transparency and Colors

- Characters can be made transparent (0-100%) over video, other characters and graphics with 64 levels of transparency.
- Opaque characters can use over 4,000,000 colors. Transparent characters can use over 8,000.
- Different colors can be used for fill and outline (variable width) as well as each letter and each graphic.

Roll, Scrawl, Animation, Effects

- Variable speed roll, crawl and push (slide) in all directions.
- Every text object, graphic and logo can be animated. Complex animations include having elements follow paths, bounce, etc.
- Elements can change outline and fill color, transparency, position as they move and results are displayed in real time.
- Move individual characters in different directions, make colors change, flash words, make letters and words bounce, spin a letter across the screen. Use fades and wipes to transition between titles and video or between two pages of titles.

Backgrounds and Graphics

- Titles can be placed on solid color, patterned or graduated backgrounds, or they can be genlocked to incoming video.
- Lines, squares, rectangles, ovals and circles can be created and placed anywhere on the screen. Each graphic object can use a different color, transparency, rotation, size, fill and outline.

Imported Logos and Graphics

- Accepts most PostScript or PCX format graphics without modification. Imported images can be any size and can be scaled, skewed and rotated when placed on screen. Transparency and anti-aliasing can be defined when graphic is generated.

Expansion Capabilities

Although PowerScript operates on its own, you can still add peripherals and connect to a computer or network. Two PC-card slots allow the addition of non-volatile flash-DRAM and Ethernet cards. RS-232 port allows connection to desktop computers for added storage and downloading of fonts or graphics from a PC.

LEADER

Manufacturing test and measurement equipment for over 40 years, Leader Instruments is the standard which others are measured against for reliability, performance, and most important—cost effectiveness. Before a product is brought to market, an exceptional degree of energy and effort go into its design. Prototypes are built and tested to withstand environmental and other factors far exceeding actual operating conditions. These include high humidity, extremes of heat, cold, shock and vibration. Manufacturing quality is built in every step of the way and only the finest parts are used. At each production run, subassemblies are separately tested before they are integrated into the finished product, then each product is tested again. This is why less than half of 1% of all Leader products are ever returned for warranty repair or adjustment.



5860C WAVEFORM MONITOR

A two-input waveform monitor, the 5860C features 1H, 1V, 2H, 2V, 1 s/div and 2V mag time bases as well as vertical amplifier response choices of flat, IRE (low pass), chroma and DIF-STEP. The latter facilitates easy checks of luminance linearity using the staircase signal. A PIX MON output jack feeds observed (A or B) signals to a picture monitor and the unit accepts an external sync reference. Built-in calibrator and on-off control of the DC restorer is also provided.

5850C VECTORSCOPE

The ideal companion for the 5860C Waveform Monitor, the 5850C adds simultaneous side-by-side waveform and vector monitoring. Featured is an electronically-generated vector scale that precludes the need for fussy centering adjustments and eases phase adjustments from relatively long viewing distances. Provision is made for selecting the phase reference from either A or B inputs or a separate external timing reference.

5100 4-Channel Component / Composite WAVEFORM

The 5100 handles three channels of component signals, plus a fourth channel for composite signals, in mixed component / composite facilities. Features are overlaid and parade waveform displays, component vector displays, and automatic bow-tie or "shark fin" displays for timing checks. Menu-driven options select format (525/60, 625/50, and 1125/60 HDTV), full line-select, vector calibration, preset front-panel setups and more. On-screen readout of scan rates, line-select, preset numbers, trigger source, cursor time and volts.

5100D Digital Waveform/Vectorscope

The 5100D works in component digital as well as component analog facilities (and mixed operations). It provides comprehensive waveform, vector, timing and picture monitoring capabilities. Menu driven control functions extend familiar waveform observations into highly specialized areas and include local calibration control, the ability to show or blank SAV/EAV signals in both the waveform and picture, the ability to monitor digital signals in GBR or YCBCr form, line select (with an adjustable window), memory storage of test setups with the ability to provide on-screen labels, flexible cursor measurements, automatic 525/60 and 625/50 operation and much much more.

5870 Waveform/Vectorscope w/SCH and Line Select

A two-channel Waveform/Vectorscope, the microprocessor-run 5870 permits overlaid waveform and vector displays, as well as overlaid A and B inputs for precision amplitude and timing/phase matching. Use of decoded R-Y allows relatively high-resolution DG and OP measurements. The 5870 adds a precision SCH measurement with on-screen numerical readout of error with an analog display of SCH error over field and line times. Full-raster line select is also featured with on-screen readout of selected lines, a strobe on the PIX MON output signal to highlight the selected line, and presets for up to nine lines for routine checks.

5872A Combination Waveform/Vectorscope

Models 5872A offers all the operating advantages of the 5870, except for the following: SCH is deleted from the 5872A (line select retained), making it ideal for satellite work.

5864A Waveform Monitor

A two-input waveform monitor that offers full monitoring facilities for cameras, VCRs and video transmission links. The 5864A offers front panel selection of A or B inputs, the choice of 2H or 2V display with sweep magnification, and flat frequency response or the insertion of an IRE filter. In addition, a switchable gain boost of X4 magnifies setup to 30 IRE units, and a dashed graticule line at 30 units on screen facilitates easy setting of master pedestal. Intensity and focus are fixed and automatic for optimum display. Supplied with an instruction manual and DC power cable.

5854 Vectorscope

A dual channel compact vectorscope, the 5854 provides precision checkout of camera encoders and camera balance, as well as the means for precise genlock adjustments for two or more video sources. Front panel controls choose between A and B inputs for display and between A and B for decoder reference. Gain is fixed or variable, with front panel controls for gain and phase adjustments. A gain boost of 5X facilitates precise camera balance adjustments in the field. Supplied with a DC power cable.

CORPORATE ACCOUNTS WELCOME

Circle (48) on Free Info Card

www.americanradiohistory.com

ROUTING CONTROL SYSTEM

Utah Scientific SC-3 routing control system: the production release of SC-3 is designed to provide the most advanced routing system when used in conjunction



with the Utah-300 router for use in broadcast, post-production, cable television, fiber-optic transmission switching and satellite uplink facilities; the SC-3

provides an Ethernet control port for connection to industry-standard LANs for network control; the system maintains compatibility with all previous Utah Scientific routers and offers the functionality to control new and older routers from other manufacturers; 508-303-8200; fax 508-303-8197; www.artel.com

Circle (261) on Free Info Card

VHF TV TRANSMITTERS

Thomcast OPTIMUM line: based on a new concept design that combines state-of-the-art technologies, this line of VHF TV transmitters provides the highest level of performance and operational capabilities; the comprehensive line, from 500W up to 60kW, features a compact foot print, wireless transmitter structure, broadband amplifier, MOSFET technology, ability to upgrade with digital standards and a common module policy with CRYSTAL (DAB) and ULTIMATE (UHF); +33 (0) 1 34 90 30 01; fax +33 (0) 1 34 90 30 11

Circle (277) on Free Info Card

VIDEO CODEC

RE 2700 DCT video codec: this video codec provides lossless transmission of SMPTE 259M video over 155Mb/s OC-3 SONET networks in real time; designed for studio transmissions, it features true 10-bit resolution and interfaces to D-1, D-5, DCT and other serial digital tape formats; the codec also provides up to six side channels of associated audio and data; the RE 2700 supports remote machine control so that users on the remote end can have complete control over VTRs and other equipment at the studio; 440-871-7617 (ext. 200); fax 440-871-4303; www.re.dk

Circle (270) on Free Info Card



PLENUM-RATED MULTIPAIR AUDIO CABLE

Gepco plenum-rated multipair audio cable: this series of cables is available in pair counts of four (6604HS), eight (6608HS) and 12

(6612HS); the cables are 22-gauge with tinned copper conductors and drains; each pair is individually shielded and color-coded with Halar insulation; other features include an overall white polymer alloy jacket, a characteristic impedance of 70 ohms and a mutual capacitance of 25pf/ft; 312-733-9555; fax 312-733-6416

Circle (273) on Free Info Card

Business Wire

Business

Canon announced that NBC-TV will use more than 14 Canon Digi-Super 70s to cover Super Bowl XXXII. The Digi-Super provides high performance without regard to object distances. IFplus technologies reduce chromatic aberrations beyond conventional IF lenses, and in addition to its optical advantages, with IFplus, the heaviest group of elements remain stationary in the focusing section of the lens, so that the camera's center of gravity never changes.

Digital System Technology, Inc., in conjunction with Argyle/Hearst, announced that it is in the process of completing the installation of a digital TV system for the ABC affiliate KITV in Honolulu. DST designed, built and installed the first FCC-licensed digital TV station.

TCI announced the installation of two

AMEK Recall automated mixing consoles into its National Digital Television



Center remote production truck. The main Recall console is configured with 44 microphone and 12 stereo line inputs. The truck is designed to handle audio for entertainment events such as concerts, talk shows and award shows.

RE announced plans to develop and market encoding and decoding prod-

ucts for the transport of DTV signals over satellite, microwave and terrestrial networks. In addition to these plans, RE was awarded a contract from AT&T to provide RE 4500 component digital video codecs for use in its International Video Services that will carry CBS's broadcast feeds from the 1998 Nagano Winter Olympics' International Broadcast Center. RE was also awarded a contract to supply RE 4500 codecs to Ohio Educational Telecommunications Network Commission, for the digital upgrade of OET's statewide video distribution network.

FAST recently presented the beta version of blue., the Native Digital Editor and has also announced the coordinated worldwide launch of blue. beta testing. blue. allows video to be edited in its original format, Native Digital, and features 10-bit uncompressed, MPEG-two and DV codecs. Combined with

The

GALLERY

Shively Labs

**Series 2000 UHF
Broadcast Antennas
B-LINE Transmission Line**

*Shively Labs offers superior
engineering support and
accessibility from your first
contact through the life of your
Shively UHF broadcast system.*

**Offering Complete
Solutions for Your
DTV Requirements!**

**UHF & FM Antennas
and Related RF Equipment**

P.O.Box 389, Bridgton, Maine 04009 USA
Tel.: +1-207 647-3327 FAX: +1-207 647-8273
NUEVO web site: www.shively.com
- An Employee-Owned Company -

Circle (51) on Free Info Card

Receive FREE Gift With Catalog *

**FREE
1997 H.L.
DALIS
CATALOG
OVER 350
PAGES**



Since 1925

**Audio, Video
& Broadcast
Engineering
Supplies**

Authorized Distributor
for over 250 major lines
including Kings Broadcast,
Belden, Neutrik, Canare, John
Fluke and Motorola.

Call, Fax or E-mail **Stanley Marks**
for your Free Copy
(NY) Ph.: 718-361-1100 • Fax: 718-392-7654
Nationwide: 1-800-HLDALIS
E-mail: Hldalis@aol.com

H.L. DALIS Inc.
35-35 24th St., Long Island City, NY 11106
TRIED THE REST? NOW TRY THE BEST!

Circle (49) on Free Info Card

**Over 25,000
units in use
worldwide!**

HENRY ENGINEERING
503 Key Vista Drive
Sierra Madre, CA 91024 USA
TEL (626) 355-3656 FAX (626) 355-0077
FAX-on-Demand Doc #120 (626) 355-4210
<http://www.henryeng.com>



Get Matchbox II to convert "consumer" (RCA and mini-jack) audio inputs and outputs to "600 ohm" balanced lines at +4dbm professional levels. Eliminate the hum, buzz, and distortion caused by mismatched levels and impedances! Gold plated connectors and direct-coupled, active circuitry yield superb audio performance. Over 25,000 units in use worldwide!

**HE HENRY
ENGINEERING**

We Build Solutions.

Circle (52) on Free Info Card

Every In - Any Out multiformat freedom, blue. supports all professional audio and video devices.

COMARK Communications' parent company, **Thomcast**, announced the acquisition of the department image from Matra Communication, a French telecommunications manufacturer. The new business unit, Multimedia and Digital Systems, will cover all activities in R&D, software and hardware products and systems aimed at providing the world market with innovative MPEG-2 products.

WCBS-TV, New York, installed a **Hitachi** Eagle System with two HV-D3 color cameras on top of the World Trade Center for its daily newscasts.



The installation of the system marks the highest resolution camera at the highest vantage point in the United States. Hitachi also announced that QVC home shopping network purchased 12 SK-2600 digital studio cameras with digital triax transmission for its new all-digital studio.

Harris Corporation was awarded a contract to provide a VHF DTV transmitter to ABC affiliate, WFAA-TV in Dallas. The PlatinumCD 20kW VHF DTV transmitter combines a reliable solid-state architecture with Harris' CD 1, the world's first commercial ATSC exciter.

SeaChange International announced that it is developing an interface between its Broadcast MediaCluster video server and OmniBus Systems' broadcast network operation system. The interface will allow the Broadcast MediaCluster to be efficiently used in TV transmission systems that have selected OmniBus Systems as their broadcast automation vendor.

KHQ-TV, an NBC affiliate, and Cowles Publishing have chosen to upgrade the station's field acquisition and editing with **Panasonic** DVCPRO equipment. The purchase includes 13 AJ-D700 camcorders, 14 AJ-D650 studio editing VTRs, six AJ-D750 studio editing VTRs, seven AJ-D230 desktop VTRs, seven AG-A850 edit controllers and a Postbox elite non-linear editing system. Also investing in the DVCPRO equipment, is the Tribune Company's ChicagoLand Television (CLTV) news. The sale includes 16 AJ-D700 camcorders, 18 AJ-D640 player/recorders and four AJ-D230 desktop VTRs.

Pioneer announced that NBC-TV's "The Tonight Show Starring Jay Leno," has installed a 3X3 IDT/Pioneer mul-



tion-less video wall as an addition to the show's set. The new multiscreen projection system replaces the old scen-

ery between Leno's desk and the Late Night band, and stands as a centerpiece in the TV studio.

Black Entertainment Television (BET) has purchased four **Canon** Digi-Super70X lenses for entertainment productions. This is one of the first reports of the lens being used for entertainment purposes, rather than its standard use in sports production. The Digi-Super70X provides a long telephoto and wide-angle combination and is engineered to incorporate Canon's internal focusing and IF+ technologies for long-range telephoto applications.

Odetics Broadcast announced that NBC affiliate, KNOP-TV purchased an Odetics SpotBank commercial insertion and automation system for use in its station. The SpotBank will work in conjunction with an ASC video server to replace its hands-on manual system.

Tribune Broadcast in agreement with **Sony** will install Sony Betacam SX digital broadcasting equipment over the next few years. The purchase will primarily include the Betacam SX hybrid recorder and the DNW-A30 player, as well as the DNE-50 and the DNE-700 non-linear editors. ■

People

On Dec. 1, Julius Barnathan, former president of ABC Broadcast Operations and Engineering, passed away at 70 years of age of lung cancer.

He joined ABC in 1954 as supervisor of ratings. He held a range of jobs at ABC, including VP in charge of TV research, VP for affiliated stations, president of the owned TV stations and VP and GM of the TV network.

Barnathan's contributions to broadcasting were significant. He guided the technical production of six presidential campaigns and nine Olympic broadcasts (for which he received Emmy Awards for the Summer Games in 1976 and 1984, and the Winter Games in 1980 and 1988). He made television more accessible to the hearing impaired by guiding the development for closed-captioning. He was also honored with NAB's Engineering Award for his contributions to broadcasting. In 1985, he received the Trustees Award from the National Academy of Television Arts and Sciences. He also received the Presidential Proclamation Award from SMPTE in 1991. This year, he was elected as an honorary member of SMPTE for his lifetime contribution to the advancement of TV technology.

He retired from ABC in 1992, and remained as a consultant on technology and important technical issues. ■



They got their
machines under
control... so what
are you waiting for?



The Secret is Out!

Two of the world's largest DBS operators
have our OmniJET™ Machine Control Server
and DTx-800™ DTMF transceiver systems.

Check out these features:

OmniJET™

- LAN/WAN TCP/IP
- RS-422 Ports
- Sony S-BUS interface
- VSYNC/LTC input
- Web Browser set-up

DTx-800™

- DTMF cue tones 8 channel
receive AND transmit
- Built-in GPIO and Relay.
with LTC reader option...

And that's only the beginning. How about independent router control,
advanced digital ad insertion, client server machine control, router pro-
tocol conversion and much more for your scalable system automation
requirements.

Don't wait... get yours **NOW!**



**pacific
computing**

133 M.S. St. Suite 103
Sunnyvale, CA 95066
Tel: 408 427-4180
Fax: 408 427-4181
pacific@paccomp.com
www.paccomp.com

Circle (55) on Free Info Card

**QUALITY.
RELIABILITY.
EASE OF
OPERATION.**



*ENG, SNV and EFP
trucks, vans and trailers*

BAF Broadcast Vehicles

TOLL FREE (800) 633-8223

WEB **www.bafcom.com**

FAX (407) 324-7860 SAT. SPACE (800) 966-3822
E-MAIL **baf@gate.net** WORLDWIDE +(407) 324-8250

Circle (53) on Free Info Card

**The
GALLERY**

NEMAL

for the Electronics Industry

(800) 522-2253 • Fax (305) 895-8172

E-mail: info@nemal.com • Internet: www.nemal.com
Brazil (011) 535-2368

MANUFACTURER AND SUPPLIER OF:

*CABLE

- Audio
- Video
- Composite
- Custom

*CABLE ASSEMBLY

- To minimum
- 4 hour service
- Printed shrink tubing
- Makes/stage boxes

*CONNECTORS

- NC
- Audio
- Triaxial
- F



*No minimum order on standard products.

Please call for your copy of our 1998 Cable
and Connector Selection Guide and
Corporate Video.

PATCH PANELS • PEELERS • TOOLING • ASSEMBLY

Immediate shipment worldwide on more than
400 interconnect products. We also design
and manufacture custom cable and
assemblies to your specifications.

NAB'98 • Booth 12643

Circle (50) on Free Info Card

Slow Motion Controller for Demanding Sports Production



NEW!

ST300

Slow Motion Controller, \$3000

- All the features and functions you would expect to find on an \$8,000 to \$12,000 slow motion controller!
- Control up to 4 VTRs
- Simple and easy to use. Small space-saving footprint.
- Quickly and easily store and recall up to 100 cue points per VTR.
- T-Bar or detented wheel provide fast & easy slomo control
- Can be customized for your specific application

Another Control
Solution From ...

**DNF
INDUSTRIES**

DNF Industries
9970 Glenhurst Blvd., Suite D, Sun Valley, CA 91352
Phone: (818) 252-0198 FAX: (818) 252-0199

Circle (54) on Free Info Card

CONVERGENCE of high quality sound and low cost



Enhanced Betacam VCRs

- ◆ 4 audio channels for any PVW or UVW Betacam VCR
- ◆ AFM kits are easy to install in your UVW or PVW VCR

**CONVERGENCE
CORPORATION**
A BCS Company

Los Angeles

1840 Flower Street
Glendale, CA 91201

818.551.5858

New York

500 W. 37th Street, 2nd Floor
New York, NY 10018

212.268.8800

www.broadcaststore.com

Dealer inquiries welcome.

Circle (56) on Free Info Card

Professional Services



Stainless inc.

50 Years of Broadcast Tower
Design - Fabrication - Construction

210 S. Third St. Voice 215-699-4871
North Wales, PA 19454 Fax 215-699-9597

REID BROADCAST COMM. INC.

ED REID - PROJECT ENG. SERVICES

RADIO-FM / AM TV-ANALOG / DIGITAL
P.O. BOX 170476
Arlington, Texas 76003

(817) 496-6142 (FAX) 496-5835
E-MAIL RBCE@NKN.NET

CHAN ASSOCIATES

Strategic Marketing • Public Relations • Advertising
1307 Shadow Lane, Suite C
PO Box 5509
Fullerton, CA 92638-0509
Phone (714) 447-4943
Fax (714) 578-0284
Pager (714) 506-1357
Email: cchan@chanassoc.com
Computer: 7481 2707

Curtis Chan
President

NETCOM

STATE OF THE ART ENGINEERING
FOR AUDIO AND VIDEO
ENGINEERING DESIGN • CAD DRAFTING SERVICES
CABLE FABRICATION • PRE-WIRED PATCH PANEL RACKS
SYSTEM INSTALLATIONS • EQUIPMENT SALES

(201) 837-8424

FAX (201) 837-8444
1409 PALMIST AVE. TEANECK, NJ 07666

East Coast Video Systems

consultants • engineers • systems integrators

3 Mars Court
Boonton, NJ 07005
973 402 0104
Fax 973 402 0208
www.ecvs.com

on line in time

HAMMETT & EDISON, INC.
CONSULTING ENGINEERS
RADIO AND TELEVISION

DANE E. ERICKSEN, P.E.

Box 280068
San Francisco, CA 94128
707/996-5200 707/996-5280 Fax

HDTV Doesn't have to mean
High Dollar TeleVision™

Check us out at
www.AstreSystems.com

JOHN H. BATTISON P.E.
CONSULTING BROADCAST ENGINEER,
FCC APPLICATIONS AM, FM, TV, LPTV
Antenna Design, Proofs, Fieldwork
2684 State Route 60 RD #1
Loudonville, OH 44842
419-994-3849 FAX 419-994-5419

D.L. MARKLEY
& Associates, Inc.
CONSULTING ENGINEERS

2104 West Moss Ave.
Peoria, Illinois 61604
(309) 673-7511
FAX (309) 673-8128
Member AFCEE

"Say It Better"

See more than 300 tips
(and related books and tapes)
from "gut instincts" expert,
Emmy-winner and former Wall
Street Journal reporter Kare Anderson at
www.sayitbetter.com

**Why not run your
business card here?**

**Only \$151⁰⁰ per
insertion.**

**Frequency discounts
available.**

**Call 800-896-9939
for details.**

Classifieds

For Sale

<http://www.broadcastexchange.com>

The new way to buy and sell preowned broadcast video gear. Free listings. Online database.

1-888-FAX-GEAR Toll-free 24-hour
Fax-on-Demand

Dial toll-free or call +1.310.442.8481 to have the latest hot list sent to your fax



**Broadcast
Exchange, Inc.**
Tel. 310-442-8481
Fax 310-442-8482

THE 5D VIRTUAL TELEPORT

Serving USA and Canada
Digital and analog video, data

C Band Transponders
available on GEI

Occasional Space
24hr booking
Worldwide Service
Call 1-800-565-1471

Program Payout and Uplink Facility
located in Ottawa, ON, CAN.

Uplink installed at your location, remote
controlled and monitored from ours

KU Band Transportable
Hire/Lease/Sell

Engineering and Technical Services

Call: Grahame Fournier
1-800-267-1221 x152
email: gfourier@5d.com

FREE 44pg Catalog & 80 Audio Video Applic.

PWR SUPP. EQ
PHONO, MIC
TRANS. ACH
TAPE VIDEO
LINE OSC
PRESS
BOXES

1 in 1 out Video/Audio
1 in 16 out Video/Audio
2 in 24 out Audio Only
1 in 32 out Video/Audio

Video & Audio Dist. Amplifier
RGS-Sync Dist. Amplifier
Routing Switchers

OPAMP LABS INC (213) 934-3566
1033 N Sycamore Av LOS ANGELES CA, 90038
<http://www.opamlabs.com>

BATTERY TOWN USA, ENERGY PLUS+, INC.
<http://www.mindspring.com/~battery>
batteries@energyplus.com. 770-975-8052 ext.
1; fax 8915 Best Value; 5.7AH "D" Cell. BP90
(71WH) \$147.00; PP90 Insert (71WH) \$115.00;
Bricks (82WH) \$292.00; Brick Inserts (82WH)
\$155.00; Rebuild Sealed Bricks (82WH) \$172.00;
Belts, Film Packs, 56K USR Modems, Internet
Access Special Promotion!

WE ARE OFFERING A NEW SATELLITE DISH
Prodelin 0800-619. Truss ret. support. 3.7 M.C.
Band RX-TX. \$3500.00 or best offer. Also 330
feet E.W. 52 Heliacable. 84147 Andrew 30471-
118. Contact Steve (305) 633-9685.

*** Studio Exchange ***

Burbank

(818) 840-1351 Fax (818) 840-1354

New and Used Video Equipment

Audio/Video Dealer

Starring

Panasonic & Sony

BUY, SELL, TRADE & CONSIGN

816 N. Victory Blvd.
Burbank, CA 91502

email: studioex@ecom.net
www.studio-exchange.com

WhisperRoom INC.
SOUND ISOLATION ENCLOSURES

PH: 423-585-5827
FAX: 423-585-5831

Vocal Booths
Broadcast Booths
etc...

E-MAIL: whisper@lcs.com
WEB SITE:
www.whisperroom.com
116 S. Sugar Hollow Road
Morristown, Tennessee 37813

PANASONIC BROADCAST & PROFESSIONAL
Video Equipment at wholesale prices! Factory
Sealed New with Full One Year Warranty. Fac-
tory Authorized for 58 Makes! ADVANCED
VIDEO SYSTEMS. (800) 233-2430.

Classifieds

For Sale

**Buy
Consign
Sell**



**90 Day
Warranty Labor,
One Year on Parts**

All Major Brands, Featuring:

DIGITAL S Night Suite

FAST Pinnacle

**JVC
PROFESSIONAL**

SONY

Special this month!

**AVID
MC 1000**

2-9 gig drives
2-20" monitors
#86124



**\$25,000
(one only)**

LA 818.551.5858

Fax 818.551.0686

NY 212.268.8800

Fax 212.268.1858

www.broadcaststore.com

Circle (100) on Free Info Card

Services

Chapman / Leonard
Studio & Production Center
Orlando, Florida

'State of the Art in Quality and Service'
Fully Equipped 9000 Sq Ft Sound Stage
Chapman Cranes, Dollies & Pedestals
Remote Camera Systems & More!



50' X 60' X 26' Hard Cyc

Ask for a video on our facility!

Toll Free: (888) 33 STAGE

www.chapman-leonard.com

**Diversity Miniature
Broadcast Microwave**



- Eng. Remote Camera to Eng Van for Live Hits
- Full Motion Colour Video/Audio
- Video Signal Processing
- 470 Lines @ 45+ db

Miller Wireless

3212 NW Ave. Suite C, Box 221
Bellingham, WA 98225 USA

tel: (360) 715.3328 fax: (360) 715.1239
e-mail: milwire@televar.com

**PROMOTE YOUR SERVICES
and increase business for as
low as \$134⁰⁰ per insertion.
Call 800-896-9939**



**Discover the Advantages
of Reprints!**

For a quote or to discuss how
reprints from this magazine can
work for you--*call me!*

Cherie Wood, INTERTEC Publishing

Phone: 913-967-7212

Fax: 913-967-1900

CONSULTING • ENGINEERING

BROADCAST PRODUCTS

**BECK
ASSOCIATES**

2403 HOWARD LANE
AUSTIN • TX • 78728
1-800-728-3725
FAX: (512) 388-1833

INSTALLATION • FURNITURE

NEW!

SDV 4-4 - Serial Digital and Analog Video Monitoring DA - 4-2-2/270 mbps.
Four relocked SDV outputs, plus four CVBS or RGB outputs. 10 bit DACs. Fits GVG 8500/8800 DA frames. **\$895**

TBC-RMT - TBC Remote Control Unit
Remote control of up to 3 TBC's. For use with internal TBC's on BVW, DVW, PVW, UVW, and BVH Beta machines or any machine using Sony BVR-50 controller. Purchased with 1, 2, or 3 modules. With 3 modules. Now available for JVC machines - Series 22, 80, 85. **\$960**

SCR-4X8 - Serial Machine Control Router - Input/Output Twelve rear mounted DB9-F connectors (four controllers, eight devices). EIA RS-422 send and receive. Controls: Twelve lighted pushbuttons for channel assignment. **\$980**

SCP-10 - Serial 422 Patch Panel
10x10 passive non-normalling serial data patch panel. Two rack units high. Legend strips and 10 patch cords included. **\$350**

VU2-P - VU/Peak Meter with Phase Indicator - Simultaneous peak and VU display. Solid state phase indication. Highly readable LED arrays. Adjustable headphone output. Hi-impedance looping inputs. **\$890**

SPK-2 - Two Channel Audio Monitor
Two channel audio confidence monitoring. Accepts both balanced and unbalanced inputs. Five switchable listening modes. Headphone output with speaker mute. **\$650.**

Circle (101) on Free Info Card



Living OMNIMEDIA

Martha Stewart Living Television is seeking a highly motivated, multi-skilled, hands-on individual with a strong studio maintenance background to become our Chief Engineer in our new Westport, CT studio.

Minimum of 5 years maintenance experience including significant experience in an ITU-R 601 digital environment. Requires knowledge of Sony VTR's inc., DBETA, BETASP, GVG digital switchers and routing switchers and DVE, Hitachi digital cameras, Avid, and various digital and analog audio consoles. Requires a high level of PC and Macintosh literacy and networking skills.

We offer a competitive salary and benefits package. Please send your resume with salary requirements to: Martha Stewart Living Omnimedia, 20 West 43rd St., NY, NY 10036. Attn.: Human Resources-CE.

An Equal Opportunity Employer.



HARRIS



TECHNICAL FIELD ENGINEER - DTV EXPRESS: DESTINATION DIGITAL!

UNIQUE: The DTV Express is a traveling road show, sponsored by Harris Corporation and PBS, that will demonstrate DTV (including HDTV) to broadcasters throughout the United States. If you have suitable experience and are interested in working with the latest equipment in a dynamic environment, we would like to hear from you.

POSITION: Immediate opening for a highly motivated experienced broadcast engineer with a solid background in analog and digital video, audio, computer, transmitter, and satellite equipment. Knowledge of the ATSC television standard is required. SBE TV Certification or FCC General Class license preferred. Must be able to present demonstrations and technical training material to broadcasters.

Duties will include hands-on digital television system implementation, testing, and trouble-shooting, management of on-site technical staff and maintenance programs, DTV demonstrations and presentations, coordination of set-up and tear-down of road show.

TRAVEL: Based initially in Alexandria, VA, extensive travel will be required.

DURATION: This will be an 18-24 month contract position.

URGENCY: Review of resumes will begin immediately.

RESPONSE: If you are interested, please submit your resume and salary requirement to:

Internet: modlum@pbs.com
Fax: 703-739-8444
Mail: PBS
1320 Braddock Place
Alexandria, VA 22314
Attn: M. Odlum



TURNER ENTERTAINMENT NETWORKS

ENGINEERS

Turner Production Engineering is looking for talented production engineers with the ability to mix in a dynamic operational environment. Our challenges range the gamut from editing, live studio, audio, and graphics, to virtual studio production and computer generated video using SGI. Experience in these related fields, and a television maintenance background is required. If you're interested in the engineering jobs of tomorrow, today, we're searching for you.

Turner Production
1050 Techwood Drive NW • Atlanta, GA 30318
(404) 885-0802 • (404) 885-4060 FAX
Attn: Kevin Shorter
kevin.shorter@turner.com

TEN is an Equal Opportunity Employer

WE PLACE ENGINEERS USA & WORLDWIDE



KEYSTONE INT'L., INC.
16 Laflin Road, Suite 900
Pittston, PA 18640, USA

Phone (717) 655-7143 • Resume/Fax (717) 654-5765
E-mail: keyjobs@keystone.microserve.com

SENIOR MAINTENANCE BROADCAST ENGINEER: Minimum of five years experience on broadcast studio equipment. Ability to trouble-shoot and repair the component level, cameras, tape machines, switchers, character generators, still storers, STLs and TSLs and all supporting equipment. Experience on transmitters, computers, and microwave systems is a plus. Resume: Fred Bragg, Chief Engineer, KOAT-TV, 3801 Carlisle Blvd. NE, Albuquerque, NM 87107. NO PHONE CALLS! <Drug-Free Workplace> *Equal Opportunity Employer*



HARRIS



TECHNICAL DIRECTOR - DTV EXPRESS: DESTINATION DIGITAL!

UNIQUE: The DTV Express is a traveling road show, sponsored by Harris Corporation and PBS, that will demonstrate DTV (including HDTV) to broadcasters throughout the United States. If you have suitable experience and are interested in working with the latest equipment in a dynamic environment, we would like to hear from you.

POSITION: Immediate opening for a highly motivated experienced broadcast engineer as Technical Director for new mobile broadcast truck and state-of-the-art digital television systems. Requires familiarity with video, audio, control, transmitter, and satellite equipment. Maintenance experience a plus. Understanding of current digital broadcast technology and knowledge of the ATSC television standard essential. Must be able to present demonstrations and technical training material to broadcasters. Management experience and SBE TV Certification of FCC General Class license preferred.

Duties will include hands-on digital television system implementation, testing, and trouble-shooting, management of on-site technical staff and maintenance programs, DTV demonstrations and presentations, coordination of set-up and tear-down of road show, and management of budget expenditures.

TRAVEL: Based initially in Alexandria, VA, extensive travel will be required.

DURATION: This will be an 18-24 month contract position.

URGENCY: Review of resumes will begin immediately.

RESPONSE: If you are interested, please submit your resume and salary requirements to:

Internet: hdunton@harris.com
Fax: 703-739-8080
Mail: DTV Express - Suite 310
Harris Corporation
1201 E. Abingdon Dr.
Alexandria, VA 22314
Attn: HDunton

**Post a job opening and promote your company.
Advertise in the Help Wanted section of Broadcast Engineering!**

SYSTEMS APPLICATION ENGINEER

Searching for a more challenging environment where you can apply your expertise and make a difference? **Panasonic Broadcast and Television Systems Company (PBTS)** is a progressive division of Matsushita Electric Corporation of America. We have an excellent opportunity for an experienced professional to join our ELGIN, IL location.

The selected candidate will become proficient with all operational and technical aspects for our product line; act as technical resource for District Sales Managers, Dealer/OEMs and customers regarding operations and problems; assist Product Engineers and Product Managers with training the sales force and assist the District Sales Managers in training the dealer network; help solve problems of integration between our products and the television/communications industries; keep up-to-date with trends to design future products; and provide technical help for booth set up at trade shows. 60% travel.

The successful candidate will possess a Bachelor's in Engineering or equivalent technical experience coupled with excellent interpersonal and communication skills. Experience in video or communications industry strongly preferred.

In return for your expertise, we offer a competitive salary and comprehensive benefits package. For consideration, please submit your resume with salary history/requirements to: **PBTS Human Resources, Dept. MEB-MC, 1A-4, 1707 N. Randall Road, Elgin, IL 60123. Fax: 847-468-4059. E-mail: bjorkmanm@panasonic.com**

Panasonic

Broadcast & Television Systems Company

We are proud to be an Equal Opportunity Employer. Drug screen required.

PRODUCTION/MAINTENANCE ENGINEER

As Time Warner Communications expands into the fiber optics arena, we are providing our customers with greater viewing options and upgraded new services. We are looking for a professional, technically-oriented individual to enhance our Programming Department.

Responsibilities include repairing and adjusting television equipment; assisting in construction of new equipment and/or modification of existing facilities; driving mobile unit to remote sites; and serving as Engineer for remote productions at the remote site. Qualified individuals must have three years of experience in broadcast maintenance including troubleshooting of studio, audio, graphic and computer systems; and background in analog and digital troubleshooting. FCC General Class License or SBE Certification preferred.

We offer a comprehensive compensation and benefits package including medical, dental, vision and life insurance; savings plans; and paid holiday and vacations. To apply, mail or fax resume and salary requirements to:

 **TIME WARNER
COMMUNICATIONS**

Time Warner Communications
Mid-South Division
Attn: Human Resources - CESE
6555 Quince Road, Suite 400,
Memphis, TN 38119
Fax: (901) 369-4515
EOE M/F/V/H

 **WETA**

Director of Engineering

WETA TV26/FM90.9 seeks an innovative, new technology savvy manager to direct the operation and maintenance of WETA's technical broadcast and production equipment and facilities. As Director of Engineering, you will hire, train and supervise TV maintenance, trans-

mitter, and broadcast operations personnel assuring coverage during periods of plant operation; manage plant improvements including preparation for acquisition, design, installation, and implementation. Serve as liaison and representative of WETA to local and national professional/trade organizations; and participate in formulation and implementation of technical and administrative policy for broadcast and transmission activity. Qualifications include a four year college degree and a minimum ten years progressively responsible experience in broadcast engineering (or equivalent), experience in supervising professional and support staff in a collective bargaining environment; project management; and budget administration. Must have knowledge of PBS Technical Operating Standards and FCC regulations. SBE certification and CADD experience highly desirable. Send resume and salary requirements to: **WETA, Human Resources/CE, PO Box 2626, Washington, DC 20013. EOE/D/M/F/V. Check the WETA website: <http://www.weta.org> for more information.**



**Kiki Stockhammer,
Play Co-Founder and
Technology Evangelist**

WANTED: INCREDIBLE SALES PEOPLE

"Every second
of your life
spent selling something
that doesn't set
your soul aflame
is a tragic waste of spirit.

Stop.

Join us at the front lines
of the next revolution.

Fax your resume' to
916.631.0705 or go to
www.play.com/jobs."

 **PLAY
INCORPORATED**

Trinity, Snappy, and More

Field Maintenance Engineers

Join the excitement of Panasonic DVCPRO!

Panasonic Broadcast and Television Systems Company (PBTs) is a dynamic organization on the cutting edge of technology. The success of our digital ENG Video equipment has created a need for experienced broadcast engineers in the **CHICAGO AREA**. This position is a combination of field and bench repair in the Midwest Region Broadcast Engineering Center.

Candidates must possess a minimum of 5 years component-level maintenance experience in broadcast or post production. Experience should be with current model cameras, studio VTRs, edit controllers, switchers and non-linear editors. Digital video experience and a working knowledge of Windows 95, MS Office and NT desired.

We offer a competitive salary and comprehensive benefits package. Please submit your resume with salary history/requirements to: **PBTs Human Resources, Dept. MEB-RM, 1A-4, 1707 N. Randall Road, Elgin, IL 60123. Fax: 847-468-4059. E-mail: bjorkmanm@panasonic.com** We are proud to be an Equal Opportunity Employer. Drug screen required.

Panasonic

Broadcast & Television Systems Company

WFLD/Fox O&O TV in Chicago is looking for a **MAINTENANCE TECHNICIAN** to be responsible for maintenance and repair of broadcast t.v. equipment w/emphasis on Beta VTR repair and studio equipment. Will work on construction projects of TV systems and be responsible for quality of work. Must have experience w/digital systems; minimum 3 years experience in maintenance/repair of broadcast TV equipment. Formal training or SBE certification a plus. Computer skills w/knowledge of software applications required. Independent work and team work. Send application material to Human Resources, WFLD/FOX 32, 205 N. Michigan Ave., Chicago, IL 60601. No phone calls/faxes please. EOE/M/F/D/V.

MAINTENANCE ENGINEER: WTVY-TV4 (CBS for Dothan and the Gulf Coast) a Benedek Broadcasting station seeks a television broadcast maintenance engineer. The candidate is expected to install and repair television equipment to the component level. Knowledge of VHF transmitters, microwaves, and computer systems is a plus. Must be able to work as a team member as well as independently. Must be able to work all shifts, including early morning, nights, and weekends. This is a hands-on position. NO CALLS PLEASE. Send resume, salary history, and references to Clyde Walker, Engineering Manager, WTVY-TV, P.O. Box 1089, Dothan, AL 36302. Fax 334-793-3947, e-mail clyde@wtvy.com. Benedek Broadcasting/WTVY-TV is an Equal Opportunity Employer.

ASSISTANT CHIEF ENGINEER Supervise engineering maintenance staff, assure compliance with regulatory agencies, routine equipment maintenance and repairs to the component level, assist in training of operation personnel, and responsible for the overall technical quality of the on air product. A minimum of five years experience in television broadcast maintenance is required, along with good supervisory skills. Experience in VHF transmitter maintenance and operation is preferred, along with SBE certification or equivalent. To request an application for employment and a job description contact: Dennis Lowe, Chief Engineer, KMVT Broadcasting, Inc., 1100 Blue Lakes Blvd. North, Twin Falls, ID 83301, or FAX your request to 208-733-4649. KMVT is an equal opportunity employer. Women and minorities are encouraged to apply.

ASSISTANT CHIEF ENGINEER: WTVY-TV4 (CBS for Dothan and the Gulf Coast) a Benedek Broadcasting station, seeks a hands-on maintenance engineer ready to move to a supervisory level. The candidate will help supervise the engineering department as well as repair and install television equipment. Knowledge of VHF transmitters, BETA-SP, DVC-PRO, microwaves and computers can put you at the head of the line. Must be able to work as a team member as well as independently. Ability to work all shifts, including early morning, nights, and weekends is an absolute must. NO CALLS PLEASE. Send resume, salary history, and references to Clyde Walker, Engineering Manager, WTVY-TV, P.O. Box 1089, Dothan, AL 36302. Fax 334-793-3947, e-mail clyde@wtvy.com. Benedek Broadcasting/WTVY-TV is an Equal Opportunity Employer.

MAINTENANCE ENGINEER KPTM FOX 42 is currently accepting applications for a full-time Maintenance Engineer. The successful candidate should have an educational background in Electronics. Duties include maintaining and trouble shooting News and studio equipment. This includes proprietary broadcast equipment and building equipment. Live news cast support is required. The ability to work across departmental lines as well as working with minimal supervision is a must. The candidates schedule will include some weekend work but is an excellent opportunity to get a start in a progressive broadcast station. Please send applications or apply in person to: KPTM FOX 42, Attention: Personnel, 4625 Farnam Street, Omaha, Nebraska 68132. No phone calls please. KPTM FOX 42 is an equal opportunity employer. M/F/H

CHIEF ENGINEER Shockley Communications Corporation is seeking qualified candidates for the position of Chief Engineer for its station in Rochester, MN. Candidates should have experience in UHF transmission systems, microwave STL/TSL, digital storage and routing and station operations, including master control, production, traffic and news. The successful candidate will be responsible for building a high power UHF station, NTSC AND DTV from scratch and grow it to be the news, programming and community service leader in this market. Qualified candidates looking for a challenge in a #1 city should send resume to: Terry Kelly, Executive VP/TV, 5725 Tokay Boulevard, Madison, WI 53719. SBE certification preferred. Shockley Communications is an equal opportunity employer.

Advertise in Broadcast Engineering's Classified section!

TV CHIEF ENGINEER Shop at Home, Inc., one of the nation's oldest and most rapidly growing Interactive Retail Networks, is actively seeking qualified candidates to fill the following positions: TV Chief Engineer - Station in Boston needs chief engineer to take charge of all technical maintenance for UHF transmitters and commercial insertion equipment. Strong technical skills and the ability to work in a self-directed environment is essential. Will work with local cable headends to ensure the highest possible quality of signal carriage; Studio Chief Engineer - for network studio in Knoxville, TN. This person will be responsible for technical maintenance of all studio and satellite uplink equipment at the network's main studios. Will supervise staff of maintenance technicians. We offer exceptional opportunities for growth, a competitive salary and a comprehensive benefits package. Interested candidates should forward a resume to: Shop at Home, Inc., Human Resources - TAF, 5210 Schubert Road, Knoxville, TN 37912. FAX (423) 689-5069 E-Mail: tfarmer@sath.com

MANAGER, TECHNICAL SERVICES An NBC O&O station in Miami has an opening for a Manager of Technical Services reporting to the Director of Engineering. The incumbent will participate in our transition to Digital TV, actively contribute input to the capital, business and operating plans and will be accountable for engineering performance. Responsible for special projects as assigned. Solid broadcast technical knowledge. Significant experience in major market production/operations/technical management. Bachelors degree in technical area or equivalent experience. Computer proficiency (Microsoft Word, Excel). Excellent leadership, team building, communications and general management skills. If interested in the above position, please send resume to: Director Employee Relations, WTVJ/NBC, Inc., 316 North Miami Avenue, Miami, FL 33128. Fax: (305) 789-4399 We are an Equal Opportunity Employer. M/F/V/H

MAINTENANCE TECHNICIAN: WHLT seeks a motivated individual for the position of Maintenance Technician. Qualified candidates must have a formal education equivalent of Associate of Arts Degree in electronics, military training, or trade school certificate preferred. Ten years of broadcast maintenance experience preferred. Must be capable to trouble shoot broadcast equipment to the component level in a timely matter under deadlines. Must be physically capable of working occasionally in hot, cold, wet, cramped, noisy or dirty places. Qualified applicants should send resume, salary history, and cover letter to Human Resources Dept., WHLT Maintenance Tech., WJTV, 1820 T.V. Road, Jackson, MS 39204. WHLT is an Equal Opportunity Employer M/F. Pre-Employment Drug Test Required.

ANCHOR/REPORTER KDNL-TV, the ABC Station for St. Louis, has an immediate opening for a weekend Anchor/Reporter. Qualified candidates must have 3-5 years experience. And possess dynamic communication, enterprise reporting, creative storytelling, and superb live remote skills. Send resumes and videotapes to: Personnel Department, KDNL TV 30, 1215 Cole Street, St. Louis, MO 63106. Pre-employment drug screening required. Minorities are encouraged to apply. KDNL is an Equal Opportunity Employer. No phone calls please. Resume deadline is January 5, 1998.

KPTS IS SEEKING A BROADCAST MAINTENANCE Engineer with demonstrated skills in troubleshooting, repair, and operation of equipment. Requires formal electronic training, two years of experience, FCC license, TV Broadcast Engineer SBE Certification or willing to obtain. Flexible schedule. Salary commensurate with experience. Please send resume to: KPTS Television, Human Resource Dept., 320 W. 21st Street North, Wichita, KS 67203. EOE

Ad Index

	Page Number	Reader Service Number	Advertiser Hotline		Page Number	Reader Service Number	Advertiser Hotline
Aerodyne Communications	57	44	800-523-2596	Nucomm Inc.	99	58	908-852-3700
A/G Audio Video Corp.	122	41	818-843-7004	NVision Inc.	69	43	916-265-1000
AF Communications Corp.	113	53	407-324-8250	Odetics, Inc.	27	21	800-243-2001
Back Associates	115	101	512-388-9777	Orban	33	12	510-297-2774
Best Power Technology	37	25	608-565-7200	Pacific Computing	113	55	408-427-4280
Best Photo-Video	106-109	47, 48	800-947-9928	Panasonic Broadcast	7		800-528-8601
Broadcast Microwave Serv.	94	57	619-560-8601	Pesa Switching Systems	35	14	800-328-1008
The Broadcast Store	113	56	818-551-5858	Philips Broadcast TV	9	16	800-962-4287
The Broadcast Store Inc.	115	100	818-551-5858	Pinnacle Systems	91	59	
Canon USA Broadcast Lens	15	18	201-816-2900	Play, Inc.	11		916-631-1865
Comark Communications	51	30	413-569-5939	Prime Image, Inc.	43	36	408-867-6519
CNF Industries	113	54	818-252-0198	Professional Communications Sys.	71	38	813-888-5353
Fast Forward Video	40	27	800-755-TIME	PSP Digital Ltd.	21	8	
Global Microwave Systems	50	29	760-631-8021	Quantel	13	17	203-656-3100
Harris Corp./Broadcast Div.	5	4	606-282-4800	Questech Ltd.	67	34	
Henry Engineering	111	52	818-355-3656	Radamec	34	13	908-518-0685
Hewlett Packard	38-39	26	707-577-2265	Sanix Corp.	95	46	708-677-3000
Hewlett Packard	53	31	800-452-4844	Scitex Digital Video	31	23	650-599-3081
H.L. Dals, Inc.	111	49	718-361-1100	Shively Labs	111	51	207-647-3327
Holaday Industries	26	20	612-934-4920	Silicon Graphics	44-45	37	800-636-8184
Inscriber Technology	65	33	519-570-9111	SMPTE	97		
Intrepid, Inc.	32	24	508-692-9000	Snell & Wilcox Ltd.	17-20	5-7	408-260-1000
Impro Antennas	60	40	916-383-1177	Snell & Wilcox Ltd.	47-49	28	408-260-1000
JVC Professional Products	41	35	800-JVC-5825	Sony Electronics	28-29		408-955-5493
Ketch Incorporated	61	3	800-231-9673	Sony Electronics	74-75		408-955-5493
Kiton Electron Devices	22	9	800-861-1044	T.C. Electronic	63	42	805-373-1828
Matthey Electronics Ltd.	24	11	914-763-8893	Videotek, Inc.	121	2	800-800-5719
Mountaingate	23	10	800-556-0222	Wheatstone Corporation	4	1	315-452-5000
NAB'98	73		800-288-8606	Winsted Corp.	30	22	800-559-6691
NDS America, Inc.	55	32	714-725-2500	Zero Stantron	36	15	800-821-0019
Nemal Electronics	113	50	305-899-0900	360 Systems	25	19	818-991-0360
Neutrik USA	59	39	732-901-9488				

Sales Offices

WEST
Thane Hefner
 5236 Colodny Ave., Suite 108
 Agoura Hills, CA 91301
 (818) 707-6476
 Fax: (818) 707-2313
 E-Mail address:
 dthefner@worldnet.att.net

Nolan Simon
 346-3 Lakemont Drive
 San Ramon, CA 94583
 (510) 735-7616
 Fax: (510) 735-7626
 E-Mail address:
 nsimon@pacbell.net

Nate Horvitz
 599 South Orange Drive
 Los Angeles, CA 90036
 (213) 933-9485
 Fax: (213) 965-1059
 E-Mail address:
 n53452624@compuserve.com

EAST
Josh Gordon
 210 President Street, Suite #4
 Brooklyn, NY 11231
 (718) 802-0488
 Fax: (718) 522-4751

EAST/MIDWEST
Joanne Melton
 1775 Broadway, Suite 730
 New York, NY 10019
 (212) 641-5270
 Fax: (212) 459-0395

INTERNATIONAL
Richard Woolley
Tony Chapman
 P.O. Box 250
 Banbury, Oxon OX16 8YJ U.K.
 +44 (0) 1295 278407
 Fax: +44 (0) 1295 278408

JAPAN
Orient Echo, Inc.
Masayoshi Yoshikawa
 1101 Grand Maison
 Shimomiyabi-Cho 2-18
 Shinjuku-ku, Tokyo 162, Japan
 (3)+81 3235-5961
 Fax: (3)+81 3235-5852

CLASSIFIED ADVERTISING
OVERLAND PARK, KS
Jeff Utter
 P.O. Box 12901
 Overland Park, KS 66282
 (800) 896-9939 (913) 967-1732
 Fax: (913) 967-1735

LIST RENTAL SERVICES
Lori Christie
 9800 Metcalf
 Overland Park, KS 66212-2215
 (913) 967-1875
 Fax: (913) 967-1897

BROADCAST engineering

EDITORIAL

Brad Dick, *Editor*
 Steve Epstein, *Technical Editor*
 Dawn Hightower, *Senior Associate Editor*
 Deanna Rood, *Associate Editor*
 Jim Saladin, *Associate Editor*
 Jennifer Lowe, *Group II Editorial Assistant*
 Tom Cook, *Senior Managing Editor*
 Carl Bentz, *Directories Manager*

ART

Stephanie L. Masterson, *Art Director*

BUSINESS

Raymond E. Maloney, *President*
 Cameron Bishop, *Senior Vice President*
 Dennis Triola, *Publisher*
 Eric Proffitt, *Marketing Coordinator*
 Kathy Lewis, *Advertising Coordinator*
 Annette Hulsey, *Classified Advertising Coordinator*
 Doug Coonrod, *Corporate Art Director*
 Barbara Kummer, *Circulation Director*
 Leann Sandifar, *Circulation Manager*
 Customer Service: 913-967-1711 or 800-441-0294

TECHNICAL CONSULTANTS

Jerry Whitaker, *Contributing Editor*
 Eric Neil Angevine, *Broadcast Acoustics*
 John H. Battison, P.E., *Antennas/Radiation*
 Dane E. Ericksen, P.E., *Systems Design*
 John Kean, *Subcarrier Technology*
 Donald L. Markley, *Transmission Facilities*
 Harry C. Martin, *Legal*

MEMBER ORGANIZATIONS

Sustaining Members of:
 • Acoustical Society of America
 • Society of Broadcast Engineers
 • Society of Motion Picture and TV Engineers
 • Society of Cable & Telecommunications Engineers

Member, American Business Press

Member, BPA International

Affiliate Member,
 International Teleproduction Society



BROADCAST ENGINEERING is edited for corporate management, engineers/technicians and other management personnel at commercial and public TV stations, post-production and recording studios, broadcast networks, cable, telephone and satellite production centers and networks. Qualified persons include consulting engineers and dealer/distributors of broadcast equipment.

SUBSCRIPTIONS: Non-qualified persons may subscribe at the following rates: United States and Canada; one year, \$55.00. Qualified and non-qualified persons in all other countries; one year, \$70.00 (surface mail); \$130.00 (air mail). Subscription information: P.O. Box 12937, Overland Park, KS 66282-2937.

Authorization to photocopy items for internal or personal use, or the internal or personal use of specific clients, is granted by Intertec Publishing, provided that the base fee of U.S. \$2.25 per copy, plus U.S. \$0.00 per page is paid directly to Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923. The fee code for users of the Transactional Reporting Service is ISSN 0361-0942/1997 \$2.25+.00. For those organizations that have been granted a photocopy license by CCC, a separate system of payment has been arranged. Prior to photocopying items for classroom use, contact CCC at (508) 750-8400. Organizations or individuals with large quantity photocopy or reprint requirements should contact Cherie Wood, (913) 967-7212. Microfilm copies of *Broadcast Engineering* magazine are available by calling or writing UMI, 300 North Zeeb Rd., P.O. Box 1346, Ann Arbor, MI 48106-1346. Phone: (313) 761-4700 or (800) 521-0600.

©1998 by Intertec Publishing **INTERTEC PUBLISHING**
 All rights reserved.

BROADCAST ENGINEERING (ISSN 0007-1994) is published monthly (except semi-monthly in May and December) and mailed free to qualified persons by Intertec Publishing, 9800 Metcalf, Overland Park, KS 66212-2215. Periodicals postage paid at Shawnee Mission, KS, and additional mailing offices. Canada Post International Publications Mail (Canadian Distribution) Sales Agreement No. 0956295. POSTMASTER: Send address changes to *Broadcast Engineering*, P.O. Box 12902, Overland Park, KS 66282-2902. CORRESPONDENCE: Editorial and Advertising: 9800 Metcalf, Overland Park, KS 66212-2215. Phone: 913-341-1300; Edit. fax: 913-967-1905. Advert. fax: 913-967-1904. © 1998 by Intertec Publishing. All rights reserved.

The end of local broadcasting?

BY PAUL MCGOLDRICK

Paul McGoldrick



If you attended the *Broadcast Engineering Digital TV '97* conference last month, you heard me make an assertion that local TV broadcasting may disappear in the digital age. I was asked by a couple of attendees to expand on that thinking:

The fact, as I noted last month, that every single TV broadcaster in the United States has committed to DTV broadcasting and has been allocated a new (mostly UHF) channel is astounding. I don't see a problem for the top 30 markets; each one of those stations either has, or can obtain, the resources necessary to build the essential RF and production infrastructure to go ahead. They will then be able to sell the additional space beyond their DTV broadcast(s) and recoup their investment. If they had to broadcast HDTV over the whole channel — as lawmakers probably thought they had agreed to — stations probably wouldn't make money for a long time. If stations had to pay for the channel allocation, the same may have been true. (Selling the empty VHF frequency spectrum in nine or more years should be the biggest money auction in history.)

For markets 31 to around 120, increasingly close attention to budgets will be needed. I suspect many will overspend. Fallout effects from those will increase the dramas played out in the lowest markets. In television, *lowest* directly equates to *poorest*. If anybody thinks that a station in a DMA of around 200 has a license to print money, I can direct you to a few buys!

Monopoly

How will those stations implement DTV? What has been happening in radio is probably a good example. In a word, *aggregation*.

Aggregation is the cover-up word for what has been described as a game of

Monopoly. When you play Monopoly, you grab every property that you can. As the game proceeds, you start amalgamating to get the right, complete, groups of properties so you can take maximum advantage of visitors. As you start to improve properties with houses and hotels, cash flow is perilous, but the risks are worth the income potential. Then a massive tax or other levy hits you and you are in trouble. You mortgage off properties that are less important to you; you do deals; you survive (hopefully).

... local TV broadcasting may disappear in the digital age.

The minimum outlay to get into DTV has got to be a DTV transmitter and antennas (probably plus a tower), STL, NTSC/525-component analog-to-DTV converter, as well as monitoring, test and DTV input equipment. With that collection you could input satellite DTV signals and add locally converted 525-line signals, probably only in 480P and broadcast. Doing all that for less than \$750,000 is unlikely.

Enter the Monopoly player who agrees to fund the project in exchange for most, or all, of the station. The buyer provides 99% of your signal by satellite, complete with advertising and you provide station IDs and a couple of local car dealer commercials. Then, the buyer brings in the supplementary services to make money from the remainder of the bandwidth.

And then the race for aggregation is on. The megagroups in radio haven't finished the feeding frenzy as they try to solve the problems of controlling

the acquired properties; and they just seem to get bigger, but more focused.

What if the small guy refuses the overtures? Local funding will probably not be available for what is inherently a bad investment, so in the end it will be either a fire sale or a bankruptcy. What is the time scale? Take the FCC's timetable for conversion, basically nine years and add another three years for the inevitable waivers to complete the process. Is this good or bad? It is not for me to say, but it does go against the stated purposes of local broadcasting.

Public broadcasting

I don't see this affecting PBS' ability to convert to DTV — and with probably more HDTV broadcasting than anyone else! One way or another, the majority of PBS stations will find the money and resources to do it. Some systems are in a better position and condition than others. It is also a great opportunity to undo some really crazy PBS things and get the system into the 21st century.

For example, in the San Francisco Bay area, there are what amounts to five PBS stations trying to get the same dollars from a relatively small percentage of the viewing population. Although the money is certainly there, it would be nice if a little imagination were used to combine those five into two UHF channel allocations. The stations could get done all the things they individually want to do without the ridiculous competition. That won't happen, unfortunately, and I for one will not be watching when the pledge drives turn audience guilt levels to a new high. ■

Paul McGoldrick is an industry consultant based on the West Coast.

601 Made Easy!



TSM 51



TSM 61



VSM 61



TVM 621



TVM 675



TVM 710



TVM 720



TVM 730



601 format waveform monitor TVM-821D.

Videotek's newest addition to the test instrument family is just what you asked for...easy & familiar.

Make your 601 production and post-production activities easier than ever with the new dual-channel TVM-821D waveform monitor and vectorscope. The newest scope in Videotek's line offers advanced features and convenience, including:

- Simultaneous display of 2 digital inputs enables:
 - Parade view for signal comparison.
 - Overlay view for system timing.
- Dedicated buttons eliminate confusing menus and multi-function keys.
- 12-bit processing with 8x oversampling ensures accurate measurements.
- Four programmable user memories allow one-touch recall of favorite settings.
- Analog audio display shows stereo amplitude, phase, and separation.

- 525/625 auto-select input and multi-voltage power supply allow use around the globe.
- CE Certified.
- Variety of case options for field use or rack-mounting.
- Affordable price brings 601 measurement within reach.

Call today to find out more about this and other innovative 601 solutions that will ease your way into the digital revolution.

Premium Quality, Intelligent Design, Smart Price...That's Videotek.

VIDEOTEK™
A Zero Defects Company

Five Year Warranty
ISO-9001 Certified

A Digital System
Integration Product

Circle (2) on Free Info Card

243 Shoemaker Road, Pottstown, PA 19464 Toll Free: (800) 800-5719 (610) 327-2292 Fax: (610) 327-9295

Visit us on the Worldwide Web: www.videotek.com

www.americanradiohistory.com

LEITCH



THE BEST VIDEO SERVER IN THE BUSINESS JUST MOVED UP IN THE WORLD.

7echnically speaking there's no better broadcast video server than ASC's VR300.™ With 1 Gb/sec bandwidth, it serves up to 24 simultaneous channels and 96 hours of online digital storage.

FIBREDRIVE. ALL THE DIFFERENCE IN THE WORLD.

The VR300 is the only on-air server with FibreDrive,™ ASC's exclusive Fibre Channel technology. FibreDrive is the only server architecture that gives all users true simultaneous random access to Fibre Channel RAID storage.

SERVE UP FASTER, BETTER LOOKING NEWS.

For a completely tapeless newsroom, integrate the VR300 with ASC's NEWSFlash,™ a powerful full-featured

news editing solution. Record satellite feeds, edit news stories, and play directly to air – all at the same time with the same media. No tapes. No local buffers. No file transfers.

THE WORLD'S MOST ADVANCED VIDEO SERVER IS NOW PART OF THE LEITCH FAMILY.

Recently, ASC's innovative server technologies became part of the Leitch family of digital broadcast solutions. Now the leader in video servers is backed up by Leitch's global support network and world-class customer service.

ASC and Leitch. The best just got better. Visit us on the web at www.leitch.com/asc.

ASC

A LEITCH COMPANY
Circle (41) on Free Info Card

USA & Canada call (888) 843-7004

International call (416) 445-9640

www.americanradiohistory.com