

Broadcast ENGINEERING

THE JOURNAL OF DIGITAL TELEVISION™

SPECIAL REPORT: TRANSMISSION TECHNOLOGY

- **Selecting DTV transmitters**
Knowing your options
- **Transmission line trade-offs**
More power up smaller line

**CONVERTING
NTSC TO HD**
Black box solutions

LIVE TV

The Way It HAS to Be

*TV-1000 and TV-80
Audio Consoles*



 Wheatstone®

252-638-7000

Circle (1) on Free Info Card

Field Strength Extraordinaire.

NEVILLE CUMMING
TEL: 650-968-2463
FAX: 650-968-8756
ncumming@harris.com

TERRY OSTLUND
TEL: 702-655-8040
FAX: 702-655-8094
tostlund@harris.com

GAYLEN EVANS
TEL: 217-221-7196
FAX: 217-221-7085
gevans@harris.com

MARK FEHLIG
TEL: 770-736-8800
FAX: 770-736-0550
mfehligh@harris.com

CARL DAVIS
TEL: 919-469-0405
FAX: 919-481-0031
cdavis@harris.com
includes Washington, DC

DAN SESSLER
TEL: 941-575-3585
FAX: 941-575-8750
dsessler@harris.com

RICHARD CHALK
TEL: 770-992-3700
FAX: 770-998-3781
rchalk@harris.com
Asheville, NC & Bristol, VA

**Systems Sales
(Non Call Letter)
RUSS READ**
TEL: 704-544-6323
FAX: 704-544-6324
rread@harris.com

**Domestic TV Sales Director
TOM DEYO**
TEL: 513-459-3408
FAX: 513-459-3890
tdeyo@harris.com

**National Accounts Manager
JOE MACK**
TEL: 513-459-3406
FAX: 513-459-3890
jmack@harris.com

As you prepare for DTV, your biggest challenge is to find the solutions that make the most sense for your station.

Harris would like to help.

You've come to know us as broadcasting's leading source for field-proven analog and digital solutions - from next-level products, customizable systems, and an unparalleled array of service and training programs.

But did you also know that you can access Harris solutions through our TV field sales team? With nearly 300 years of combined experience in broadcast engineering, operations, management and sales, our field team knows broadcasting.

Backed by the resources of Harris - including full-time DTV applications engineering; a large and experienced systems integration team, and a full force of service, installation and training experts - our field sales team is ready to help make your conversion to DTV as smooth, as hassle-free, and as cost-effective as possible.

Why not contact us today and put us to work for you?




A new world of broadcast solutions

End-to-End Solutions - RF: ATSC MPEG-2 Encoding System - Dual-Channel STL - Analog and Digital VHF and UHF Transmitters - ATSC 8-VSB Exciter - Combining Systems - Multi-Channel Antennas - DTV RF Conversion Studies - Training - Field Service and Installation - 24-Hour Service and Parts • **Systems:** ENG - Fly-Away Satellite - Mobile Production - SNG - Satellite Uplink - Television Production, Transmission and Master Control - Turnkey Systems • **Audio-for-Video Products and Systems**

Circle (4) on Free Info Card

www.americanradiohistory.com

IN THIS ISSUE

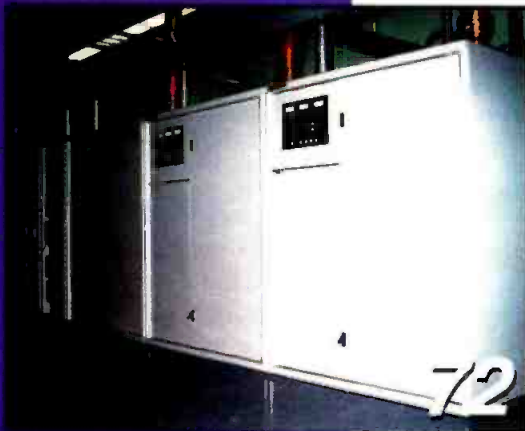

Features

72 So you need to buy a transmitter?

Choose carefully, there's a lot riding on this decision.

78 Transmission-line trade-offs for DTV

How to feed more power up the same line.

86 Understanding HD/SD conversion

Get ready to convert — almost everything!



Beyond the Headlines

NEWS

- 12 500 channels plus video on demand?
- 14 Honors well-deserved
- 14 FCC is playing meter maid!
- 16 Survival of the fittest!
- 16 Outside mainstream America: The X Games
- 20 Wedding bells for AT&T and TCI

FCC UPDATE

- 26 FCC to audit children's commercial time

DTV UPDATE

- 28 No space for DTV

EXPERT'S CORNER/VENDOR VIEWS

- 30 Interactive TV: Real or hype?

Digital Handbook

TRANSITION TO DIGITAL

- 34 Audio levels and metering in digital and hybrid environments

COMPUTERS AND NETWORKS

- 42 Network security

ASK DR. DIGITAL

- 46 Component level repair in a black box world



(continued on page 6)

EVERYWHERE YOU GO




The News is
DVCPRO

Panasonic

Broadcast & Digital Systems Company

For more information call: 1-800-528-8601 Upon request enter product code 15

WWW.PANASONIC.com/PBDS

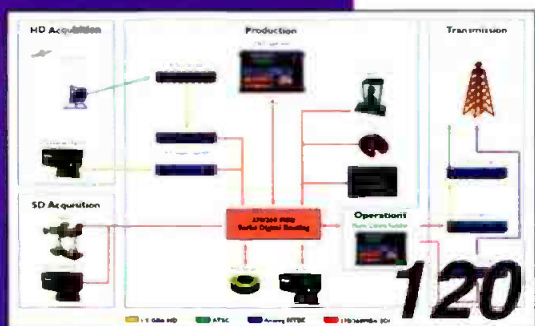

ON THE COVER: Photo by Doug Schwartz, Sterling Communications.

WEB SITE DIRECTORY

www.broadcastengineering.com

Looking for information?

Check out the
Broadcast Engineering
web site for easy access to:

- Calendar of events
- Subscription info
- Articles

Systems Design & Integration

TRANSMISSION & DISTRIBUTION

- 48 Transmitter maintenance

PRODUCTION CLIPS

- 50 Fundamentals of grounding

SPECIAL REPORT

- 59 DTV Express: On the road to television's future

New Products & Reviews

APPLIED TECHNOLOGY

- 94 Thomson: Tubes for DTV
112 Quantel: Step-by-step approach to HD
120 Snell & Wilcox: Upconversion and digital television

TECHNOLOGY IN TRANSITION

- 126 Video servers

NEW PRODUCTS

- 130 New switchable SDTV/HDTV video recording system from Sierra Design Labs

BUSINESS WIRE

- 134 Panasonic equipment helps stations convert their news operations to Panasonic DVCPRO

Departments

- 08 Editorial
10 Reader Feedback
92 Management
140 Classifieds
145 Advertisers' index
146 EOM

FREEZE FRAME

A look at the technology that shaped this industry.

Do you remember?

This RCA 110kW transmitter helped make WPHL-TV the nation's most powerful station at 4.3 million watts. What year did the system go on the air?



Answer: 1968



From live action to fast reaction

We're bringing
tomorrow
together

DD35. THE POWER OF FAST REACTION

World Cup soccer means world-class play. Full of action and excitement. Capture the action with **Philips DD 35**, the fastest "live" production switcher available today. With up to 48 inputs and full programmability, the DD 35 is the most convenient and economic answer to on-air operation. These and many other features make the DD 35 production switcher the choice of broadcast professionals around the world.

Call **Philips Digital Video Systems Company** on 1-800-962-4287
Official supplier of Professional Broadcast Equipment and Systems

Circle (12) on Free Info Card



PHILIPS

Let's make things better.

“The point is that you can’t be too greedy”

This quote made by Donald Trump aptly describes the recent deal between AT&T and TCI. Here was John Malone, grinning from ear to ear, as he and AT&T’s CEO Michael Armstrong met the press last month to announce their \$48 billion deal. AT&T agreed to pay \$37.3 billion in cash and stock and to assume \$11 billion in TCI debt. Hell, if I were Malone, I’d not only grin, I’d laugh out loud — all the way to the bank. For a guy who became known as a technological visionary, he sure seems to have become materialistic since he last danced with AT&T’s former child, Atlantic Bell.

In reviewing the background for this editorial, I read a lot of material, and something important stood out; at no point did Malone or Armstrong emphasize any improved services or lower prices or, God forbid, “more competition.” Oh yeah, there were plenty of quotes from outsiders who spun their own opinions into the deal. But, at least in my research, neither company talked about providing new and better services for consumers.

What *was* said is that AT&T would get access to TCI’s 10.5 million cable customers; if you include TCI affiliates, that number jumps to 33 million. Not a bad chunk of the nation’s 65 million cable homes. And for what purpose? The driving force behind this deal is AT&T’s desperation to get a piece of the \$100-billion-a-year local phone market. In other words, TCI customers should not expect to see the infusion of capital and debt assumed by AT&T as a sign that their service will get better, but rather that a new phone company may be knocking on their door.

When asked what TCI got out of the arrangement, Leo Hindery Jr., Malone’s number-two guy, said that TCI’s market share was currently 65%, “My ability to penetrate the last 35% will be much better when


I can use Mike’s (AT&T’s) name. Being able to market local phone service under the AT&T brand name is like Thanksgiving sitting out there. It is stunning.” What an egotistical, self-serving, consumer-bashing bunch of crap! Mr. Hindery, you ought to be ashamed of yourself! This whole deal sounds like it’s just more of the same — big business scores one and consumers score zero — game over.

What’s going to happen is that TCI customers won’t see decreased prices or improved services. AT&T customers won’t see any similar benefits either. In fact, what’s likely to happen is that AT&T will seek rate increases from its current consumers to cover its newly acquired debt. Although all this new capital should at least result in new digital services being quickly brought into TCI homes, that doesn’t appear to be likely. If I were a TCI customer, I’d be keeping my eye on the sky (read that as Primestar and DirecTV) for future cost breaks and new services. With increased debt comes higher prices. Ask your bean counter. Increased debt means you have to service (pay off) that debt. It’s obvious that the pricing of future AT&T and TCI services is more likely to resemble a bottle of Dom Perignon than anything else.

Brad Dick

Brad Dick, editor

direct: brad_dick@compuserve.com
website: www.broadcastengineering.com

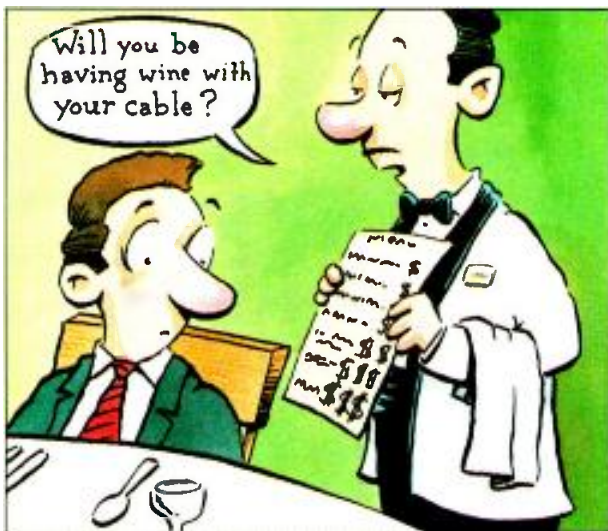

"Trinity is ready to replace a quarter of a million dollar television control room."

— CNN

"My jaw dropped... Trinity proves you don't have to win the lottery to buy real-time effects and a D1 production studio. This from a PC? You bet."

— Digital Video Magazine

"Wow ... Trinity goes far and beyond anything available for sale today in terms of features and price. Trinity's real-time video effects might be considered mind-boggling at any price... this is the system to watch"

— Videograph

"A state-of-the-art television studio offering dazzling special effects at a surprisingly low price. Trinity has amazing capabilities... it looked like it was running on a \$100,000 system."

— New Media Magazine

"Nothing short of magical... the first true all-digital D-1 video switcher for the desktop... a real winner."

— AV Video

"Innovative real-time effects that really turned heads ... Trinity's CG and paint/compositing programs rival systems at more than twice the price."


— Video Systems

"...rivals the performance of systems that cost hundreds of thousands of dollars."

"functions previously found only in high-end work stations and multi-hundred thousand dollar dedicated production gear... Trinity made the video industry sit up and take notice"

— Digital Video

Trinity Is Here

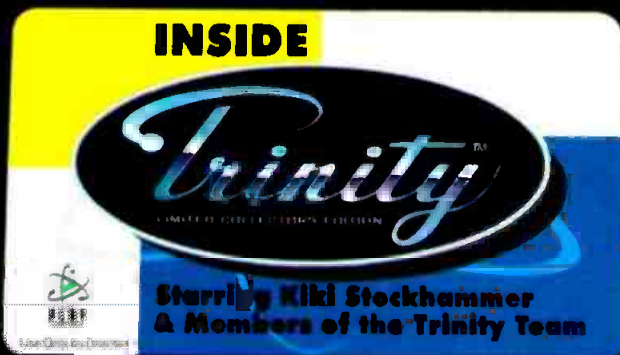

See It For Yourself
Free Tape • 800.450.PLAY • www.play.com

"Trinity revolutionize the video-editing business with video mixing and editing effects you couldn't have done a year ago without a million dollars' worth of equipment. Without question, Trinity will send a magnitude 8 trembler through the world of broadcast TV."

— BYTE

"There are things this system can do that even Silicon Graphics machines can't do. It's phenomenal... make sure you see this thing."

— PC Magazine

"Trinity is enormously impressive, with super-sharp, noiseless video and fabulous effects"

— Digital Magic

"In a word, stunning... Trinity stands poised to revolutionize the desktop video industry."

"Trinity represents a radical development in the PC-based video arena. Revolutionary... I want one!"

— Millimeter

"Trinity was breathtaking in its level of sophistication...the level of functionality and sheer versatility made it a runaway winner."

— Multimedia

"Trinity is awe-inspiring ...one of the most significant and intriguing concepts within the hurricane of products."

— TV Technology



PLAY
INCORPORATED

TEL: 916.851.0800 FAX: 916.851.0801

In our last ad we mentioned that we created Trinity because we like making video. That comment generated a lot of cool email. We've been around this industry for over 10 years and many of you have gotten to know us. We worked so hard and passionately to create Trinity. In fact, as soon as we shipped Trinity we took a little time off to go on a tour of ourselves just for fun. Someday there will be a fast-cut, highly-produced Trinity demo tape. This is not that tape. This tape is different. It's a very personal tour of Trinity. It's for the people who invented it. We made the tape in a few days right here in our offices - no script and no time for second takes. Just us... and our Trinity. Email: littlewords@thebo.com

This tape is available for a limited time only exclusively in North America. Trinity is a trademark of Play Incorporated. Patents pending. Copyright © 1998

My digital is better than your digital

I agree with your editorial "My digital is better than your digital." (See May 1998, p. 10.) It's the quality of the programming and not the quality of the broadcast. However, what will happen when one network offers live sports broadcast in higher resolution than a competitor. I've been in pubs where the deciding factor on what game to watch was resolved with the most esoteric reasoning. Perhaps the deciding factor will be broadcast quality. I believe live



events, which equals identical programming, will become the cornerstone of a viewer favoring one format (network) over another. But who am I to judge. I still use a turntable and favor LPs.

CHRIS EDWARDS
TECHNICAL OPERATIONS
ESPN CLASSIC SPORTS

Hey Chris,

Does "Classic Sports" mean you guys do Beethoven and Brahms? Or is "Classic" just old sports figures?

I've been wondering when someone would say what it is, but I didn't think I would see it in a technical magazine. Programming is what counts. Technology is only a solution looking for a need. Without must-carry for cable to help, is digital broadcasting headed for oblivion? And who would expect more from a Washington bureaucracy?

DAVID GROVER
WSU/CTN

You sir, are right on the mark with your editorial. I too wondered what would happen when the TV stations in this area went digital. I wondered if they would repeat the "my radar is better than your radar" war. Yep, it happened here in Orlando. Channel 6 has "Neighborhood Doppler," Channel 9 has "Doppler 9000" and Channel 2 started it all with "Live Super Doppler 2."

KEN OTTO
ENGINEERING TECHNICIAN
WBCC-TV
COCOA, FL

Non-linear: A reality check

Gee, I thought I watched Ken Burns' Civil War documentary on my television. I don't recall it being a theatrical release. Therefore, I would describe a "film maker" as one who produces and creates in that medium. Ken may shoot it on film, but it ends up on video, and in my book, that's television. As a battle-scarred veteran of several non-linear editing systems, I would say Charlie White was right on the money (see "Non-Linear Editing: A Reality Check," May 1998, p. 96).

DENNIS HART
SEMAPHORE VIDEO

In Charlie White's article on non-linear editing, he says that the StrataSphere by Scitex "renders" video. This is not true. It is probably the only system for its price that does not render its layer tracks; instead, it "composites" helping keep the process non-destructive.

STEVE SMITH
LAS VEGAS, NV

Wireless video sender

Dear Mr. Dick:

I would like to see an article on Henry Ruh's modifications to the Wireless Video Sender, including the modifications made and external antennas needed. (See "In response to the October Digital Ba-

sics — A TV Station for Less Than \$150," Jan. 1998, p. 12). Many of us in the education area would love to teach our students about the wonders of live shots of ENG links but can't afford the \$35,000 price tag. Can you help?

Mr. Ruh responds:

The unit is called the Wavecom jr. It is available from ATV Research, 310 Broadway, Dakota City, NE; 800-392-3922 or 402-987-3771.

Planning for the future

Editor:

I would like to know if any kind of assessment tools exist to help determine where your facility engineer is in relation to future (technical) requirements. I have a great broadcast engineer, but am worried about his readiness and ability to transition to the computerized world. Do you know someone who can help consult with us on training?

NAME WITHHELD TO
PROTECT THE INNOCENT

Dear Manager:

I think it's wonderful that you're concerned about the training that will be required for your engineer. My recommendation has always been to look to the Society of Broadcast Engineers (SBE) as the best source for training and education. They maintain the best certification program available and have local chapters. In addition, the SBE has a wealth of technical references, including books, tapes and other training materials. Contact: Society of Broadcast Engineers, 8445 Keystone Crossing, Suite 140, Indianapolis, IN 46220; 317-253-1640.

BRAD DICK
EDITOR AND FORMER SBE PRESIDENT

Send your comments to
brad_dick@compuserve
or fax 913-967-1905.
Also, check out the
BE web site at
www.broadcastengineering.com

Our HDTV Lenses Took The Gold At Nagano.

The Winter Games at Nagano provided many firsts.

For broadcasters, it was the first time these events were captured in HDTV. Japan's NHK, could select from their own backyard, some of the best HDTV equipment manufacturers in the world. For lenses, they choose Canon. Great moments like these demand nothing less.

Since being the first to introduce a full line of HDTV lenses, Canon has been the industry source for this important technology. Users comment on the incredible shots, lightweight design, exceptional technology, ease-of-use, and 100% support.



Canon's full line of ENG and Studio HDTV lenses

incorporate their world renowned Internal Focus (IF+) technology and include the HJ15X8B IRS/IAS, the world's lightest standard zoom (3.5 lbs.); the HJ18X7.8B IRS/IAS Long Zoom (18X zoom and 7.8mm wide angle); the HJ9X5.5B IRS/IAS Wide Angle Zoom, achieving the widest angle for HDTV lenses; the UJ20X7B Studio lens, with Digital Servo Controls for precise focusing; and the UJ65X9.5B Field Zoom, with the longest zoom ratio in its class. When you're ready to go HDTV, go for the finest HDTV lenses in the world: Canon HDTV Lenses.



For more info

Call 1-800-321-4388

(In Canada: 905-795-2012)

<http://www.usa.canon.com>

Emmy winner for "Implementation in Lens Technology to Achieve Compatibility with CCD Sensors."

Canon

Circle (13) on Free Info Card

www.americanradiohistory.com



500 channels plus video on demand?

BY LARRY BLOOMFIELD

Look out! There's a new kid on the block, Digital Broadcasting Open Video Systems (DBOVS). What could eventually amount to a formidable competitor to cable, MDS (wireless cable) and DBS, this FCC-licensed, Santa Ana, CA-based company plans to conduct test trials by furnishing demo sites in major southern California locations. DBOVS says its equipment will enable the end consumer to experiment with video-on-demand, TV interaction, high-speed Internet, and above all, high definition. Open video systems (OVS) were created as part of the Telecommunications Act of 1996. OVS operators will qualify and grant broadcast/channel licenses to video programming providers. DBOVS plans to offer vid-

eo-on-demand, interactive programming, regular programming, and to

"Having three terabytes will give users a beginning solution to explore our digital interactive atmosphere," says Jonathan Neubauer, DBOVS's director of marketing.


The idea behind the service is that consumers can stay at home and won't need to go anywhere to rent a movie. This is nothing new. Cable services and direct broadcast satellite services offer this service now. The difference is DBOVS's service is "on demand." DBOVS says, "Just click a remote control anytime, sit back and watch." The key operative word is "anytime," which is not true of cable and satellite services. Want to watch a movie at 9:23 p.m.? Click the

remote, and it's on your screen, no waiting.

"In addition, DBOVS plans to have available any content at any time, up to the consumer's desire. Consumers will have available service, such as shopping, Internet surfing, e-mailing, watching regular television, distance learning, tele-medicine or simply talking to someone through your television in full-screen full-motion," said Roy Jimenez, vice president of DBOVS.

In the 1996 Telecommunications Act, Congress sought to eliminate the exclusivity of the telephone and cable companies by structuring a way for them and others to compete in each other's formerly monopolized territories; thus, creating an equal access opportunity for TV channels. According to DBOVS, "This access will grant more, better and different kinds of programming. It would also stimulate competition, keeping prices low and affordable to home viewers."

To date, only five applicants have been approved as OVS operators. Four

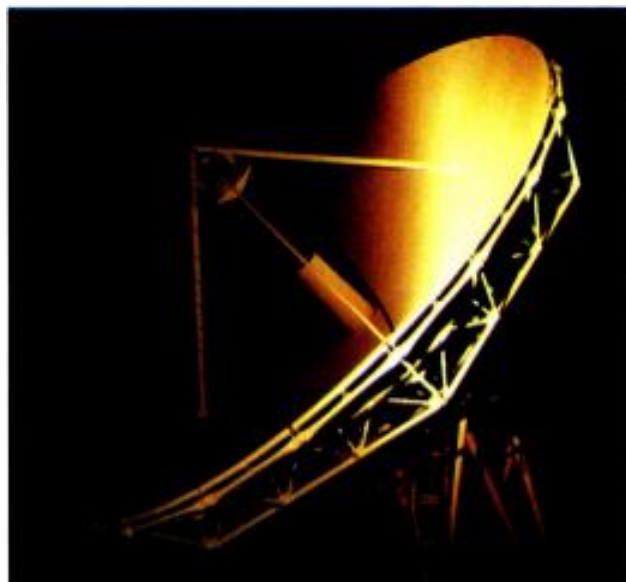


special customers, inventory control and what they are calling solutions.

FRAME GRAB

A look at the issues driving today's technology.

Steady growth seen for HDTV transmitters

Consistent growth seen for DTV transmitters, at least for the next five years.

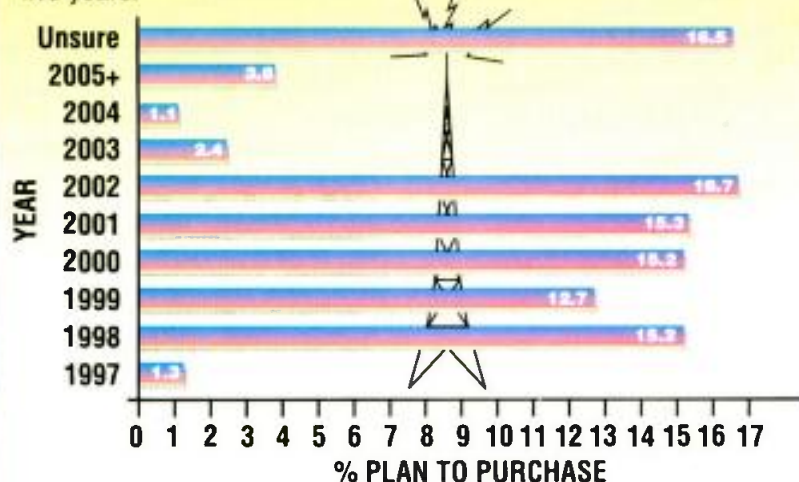

Source: SCRI International / www.scri.com / scri@scri.com

Down by the Bitstream

Mention Oregon and most people visualize rugged Pacific coastline, whitewater streams, mountains and big trees. Yes, we do have timber (and spotted owls), but Oregon also has a "forest of silicon", where companies design everything from A to P... that's audio to Pentiums™.

Since 1984 Audio Precision has designed and manufactured advanced audio test equipment in Beaverton, Oregon. Our first product, the System One is now known as the recognized standard for audio testing, with many thousands in use worldwide.

System Two furthers this audio testing tradition with new features designed for testing the digital audio pulse stream, as well as higher audio performance specifications overall:

System Two

- Complete AES digital interface pulse stream measurements to AES3 spec
- Read and test AES interface control & status information
- Measurements of embedded audio
- Analog THD+N $\leq 0.0004\%$ (-108 dB)
- Analog Analyzer residual noise $\leq 1.0 \mu\text{V}$ (-118 dBu)
- Digital analyzer noise $\leq -140 \text{ dBFS}$ wideband $\leq -150 \text{ dBFS}$ narrowband
- Digital analyzer residual THD+N $\leq -130 \text{ dBFS}$
- FFT analyzer residual -140 dB

System Two... the New standard for Audio Testing. For further information and a demonstration contact any of our worldwide representatives.



**Audio
precision**

Audio Precision
PO Box 2108
Beaverton, Oregon 97075 3070
Tel: (503) 827-7152 FAX: (503) 641-8908
US Toll Free: 1-800-231-7350

Circle 114 on Reader Info Card



INTERNATIONAL DISTRIBUTORS: Australia: IRT Electronics Pty Ltd, Tel: 2-339 3714; Austria: ELEKCO GmbH, Tel: (1) 815 0470; Belgium: ELO NV, Tel: 0-56 8010; Brazil: RICHWAY LTD, Tel: (21) 25 5311; Bulgaria: EL SINCO Rep. Office Sofia, Tel: (2) 958 1245; Canada: G.K. Electronics, Tel: (416) 893-7773; China: N. Electronics Co. Ltd, Tel: 242; Czech Republic: EL SINCO Rep. Office Zagreb, Tel: 1 68 08 14; Denmark: ETS Mesureur, Tel: (1) 45 83 66 41; Germany: ETS Mesureur, Tel: (1) 45 83 66 41; Greece: ETS Mesureur, Tel: (1) 45 83 66 41; Hong Kong: ETS Mesureur, Tel: (1) 45 83 66 41; India: ETS Mesureur, Tel: (1) 45 83 66 41; Israel: Dan-EI Technologies Ltd, Tel: 3-647 8770; Italy: ETS Mesureur, Tel: (1) 45 83 66 41; Japan: ETS Mesureur, Tel: (1) 45 83 66 41; Korea: ETS Mesureur, Tel: (1) 45 83 66 41; Malaysia: Test Measurement & Engineering, Tel: 546 53-7347/8; Mexico: ETS Mesureur, Tel: (1) 45 83 66 41; New Zealand: Audio & Video Wholesalers, Tel: 9 275 728; Norway: ETS Mesureur, Tel: (1) 45 83 66 41; Poland: ETS Mesureur, Tel: (1) 45 83 66 41; Portugal: ETS Mesureur, Tel: (1) 45 83 66 41; Singapore: TME Systems Pte Ltd, Tel: 747-7234; Slovakia: EL SINCO Slovakia, Tel: 1 68 08 14; South Africa: SOUND SYSTEMS, Tel: 1 68 08 14; Spain: ETS Mesureur, Tel: (1) 45 83 66 41; Sweden: TTS Tel & Ton Studioteknik AB, Tel: 31 50 51 50; Switzerland: Dr. W. A. G. GmbH, Tel: 1 68 08 14; Taiwan: A.O.C. Double Advanced Tech., Tel: 2-586 0666; Thailand: Masswork Company Ltd., Tel: 2-294-4930; United Kingdom: Thrifty Thandar Instruments Ltd., Tel: (1484) 412451.

of them are large telephone companies in the New York and New Jersey areas. DBOVS, a California LLC, is the only licensed OVS operator on the West Coast. "We are certified to administer 500 channels of enhanced broadcast television for the southern California area," said a DBOVS spokesperson.

Here's how they're going to do it.

First the OVS will have a large number of DVDs and component VCRs at their main offices as mass storage source devices. Initially, these mass storage devices will be connected through a one-picobit MPEG-II file server that uses fiber channel RAID. With the assistance of a Silicon Graphics' Origin 2000 system using Cray links for vid-

eo-on-demand, they will deliver the program material you have asked for, via fiber-optic cables to the local phone company. The program will then, in turn, be delivered to your neighborhood via fiber-optic cable to a local hub. From there, it will be delivered via copper wire to DBOVS's decoder box in your home. Each circuit will be a full 6MHz. The broadcasting format will be delivered in a digital TV format. The set-top box will allow the signal to be converted into analog so that existing TV sets will not be outdated. It is up to the home viewer to determine what kind of signal they want to watch.

Jimenez said, "We can deliver any progressive scan program material, at any resolution, to any of our subscribers' TV sets or PCs. We are pioneering this technology. After second quarter '98 testing, we will go forward with those results with plans to have a working system into people's home early in 1999."

A visit to DBOVS's web page is worth the time and effort. For more information on this new competitor to cable, the phone company and DBS, along with a deeper look at the technology behind what DBOVS is doing, check out its web site at www.DBOVS.com ■

Honors well-deserved

Yves Faroudja, founder and chief technical officer of Faroudja Laboratories recently received the prestigious Charles F. Jenkins Lifetime Achievement Award from the Academy of Television Arts & Sciences at the Engineering Awards Presentation in Beverly Hills, CA, for the Development of key patents in video signal processing.

The Engineering Emmy was given to Faroudja for the development of key patents in the arena of NTSC processing, encoding, decoding, enhancement and noise reduction. Faroudja was instrumental in developing the Sony U-matic, S-VHS and Hi-8 video recorders.

In 1991, Faroudja accepted an Emmy for his work on NTSC advancement. Faroudja is a fellow of the SMPTE and a member of ATSC, IEEE



Yves Faroudja

and the NAB. He has been honored with the Monitor Award for excellence in engineering, and in 1987 received the SMPTE David Sarnoff Gold Medal Award.

Michael J. Moone, president and CEO of Faroudja commented, "For more than 25 years, Yves Faroudja has pioneered technologies related to video-signal processing and video-image enhancement, earning more than 50 patents.

"With HDTV coming on strong, in the most sweeping change in the history of television, Yves has brought Faroudja into a leadership position right in the middle of the digital revolution. We are proud and pleased that he is being recognized for his considerable achievements by the Television Academy."

Faroudja stated, "Our sole purpose, our passion, all these years has been to deliver the best video-image quality possible in all environments. We have been focused on overcoming the limitations inherent in the way video has been displayed since the beginning of commercial television.

"These limitations, which are common to both U.S. and international television standards, fall into the four general categories that we have addressed: scan lines, motion artifacts, color artifacts and loss of detail.

"Our new line of Digital Format Translators provides a range of modular solutions for broadcasters, cable and satellite services seeking to deliver a variety of Digital Television (DTV) and High-Definition (HDTV) video formats to meet the new HDTV/DTV standards."

Faroudja further noted that broadcast engineers at networks, at station groups and at post-production houses are the people who must solve the dilemma of multiple-format sources and the delivery of FCC-compliant digital signals. It is imperative that stations have a top-quality and flexible solution". ■

The FCC is playing meter maid!

Watch where you park your satellite. If you don't believe me, just ask the folks at EchoStar Satellite Corporation. The FCC has issued a Notice of Apparent Liability for Forfeiture of \$20,000 each for operating its two satellites, EchoStar 1 and 2, at locations other than their "authorized" locations. How do you go about explaining to your stockholders that you got parking tickets totaling \$40,000? ■

DIGITAL HEADACHE?

DTV Formats



Active Lines	Horizontal Pixels	Picture Aspect Ratio		Picture Rate			
		4:3	16:9	60i	60p	30p	24p
1080i	1920		X	X		X	X
720	1280		X		X	X	X
480	704	X	X	X	X	X	X
480	640	X		X	X	X	X

DIGITAL ASPIRIN

DFT5000 DIGITAL FORMAT TRANSLATOR™



The award winning Digital Format Translator™ line from Faroudja provides the solution to broadcast studios and production houses that need HDTV-like images from interlaced analog and digital sources.

The Digital Format Translator applies patented Faroudja technology to produce HDTV-like images at 480P, 720P and 1080I rates plus complete aspect ratio and image scaling controls.

There is far more to HDTV than just scan rates. Only Faroudja's patented technology can match the stunning quality that HDTV can offer.

Call today to arrange a demonstration.



**FAROUDJA
PICTURE PLUS™**

750 Palomar Avenue • Sunnyvale, CA 94086
Tel 408 735 1492 • Fax 408 735 8571
Email sales@faroudja.com

Circle (5) on Free Info Card

www.americanradiohistory.com

Survival of the fittest!

Most all America is covered by TV signals, one way or another. Until just a few years ago, if you didn't live in an area covered directly by an UHF or VHF full power station, chances are you were able to see your favorite shows via translators or LPTV stations. Even though sets manufactured today won't go there, there's still a translator operating in eastern Oregon on Channel 72. Some areas were, and still are, served via several translator hops. The accessibility in the winter and the costs to maintaining these low-powered devices (typically 10W VHF and 100W UHF), often times, isolated translators, has made them an albatross around the responsible parties' necks.

Hard-wire cable companies have been around for a long time and have helped to fill some of this uncovered area. It isn't always economically feasible, though, to string a cable into some of the more remote areas though. Then there were the wireless cable companies in the 2-3GHz bands.

With the advent of Direct Broadcast Service (DBS) just a few years ago and the excellent picture quality associated with the digital transmission, many viewers in remote areas have switched from their own tall antennas and translator services to one of the several satellite systems now available.

In addition, the FCC's DTV channel assignments have cast a definite cloud over the future of these translators and LPTVs. Many will probably have to go bye-bye in favor of the new technology.

It would appear, however, that all is not lost. Local-to-local television via satellite is on the horizon. If Capitol Broadcasting has its way, they will launch an \$800 million satellite that would carry all TV stations in all markets. There is a lot of industry support of this concept. Jim Babb, president of the National Association of Broadcasters (NAB) TV board and vice president of Lin Television, said, "The Capitol proposal is an enlightened look at the situation. This should create an excellent opportunity for broadcasters." NAB put its full support to the concept in a vote taken during the board's winter meeting in Laguna Niguel, CA.

This is an interesting position because some broadcasters have expressed concern over EchoStar's plans to offer their "local-into-local" service. For openers, EchoStar plans to retransmit the local signals of the four major network affiliates to unserved viewers in Atlanta, Baltimore, Dallas, Detroit, Miami and Philadelphia; and the Capitol approach seems to be much more aggressive. EchoStar maintains that they do not yet have the technical capacity to carry all stations into all markets to which they broadcast, but eventually plan to do so. EchoStar's chairman Charlie Ergen said, "As technology improves, EchoStar intends to invest in additional satellites to deliver local signals in more markets covering a greater number of channels in each market."

Roger LaMay, vice president and general manager of WTXF-TV, in Philadelphia, expressed reservations, "We are not happy about it because we have real concerns about EchoStar's ability to keep people from getting the signal when they shouldn't be." On the other hand, Brian Jones the general manager of CBS's affiliate KTVT-TV, in Dallas, says, "We are happy to provide our signal to anyone who wants to receive it as long as that does not infringe on any other CBS station's market."

If and when Capitol's proposal comes to fruition, it would be legal for satellite companies to retransmit local TV signals into local markets. Stipulations similar to those exposed on cable companies now would have to be enforced, such as must-carry, retransmission consent, network non-duplication and the syndicated exclusivity rules.

Congress has expressed concern with rising cable rates and has encouraged competitive services like satellite broadcasting or DBS. In light of this, and with NAB's support, Capitol believes its legislation has a good chance of passing this year.

Dianne Smith, attorney for Capitol Broadcasting says, "It will take 24 to 26 months to build a satellite from the minute we say go, and we will not say go until we get the legislation. Until that time, Capitol Broadcasting is eating the start-up costs." In the mean-

time, Capitol is seeking financing for this venture they calling "local TV on satellite."

A scenario similar to these proposals will certainly happen sooner or later. There is no question that with this type of service available, the need for translators will vanish. My question is what impact will this have on the wire and wireless cable companies? ■

Larry Bloomfield, a former chief engineer, is an industry consultant and author located in San Jose, CA.


Outside mainstream America: The X Games

BY DEANNA ROOD,
SENIOR ASSOCIATE EDITOR

More than 450 of the world's top alternative-sports athletes gathered in San Diego, June 20 through June 30, to participate in the X Games. Now in its fourth year, the event, which up until two years ago was named the Extreme Games, included competitions for events such as aggressive in-line skating, barefoot jumping, bicycle stunt dirt jumping and street luge super mass downhill.

With its name now abbreviated to the X Games, this year's competitions were staged at three venues located around San Diego. All but three events took place at Mariner Point — skysurfing took place in Oceanside, and the street luge and the downhill in-line skating competitions took place at Qualcomm Stadium.

The all-sports network, ESPN, covered the event, which was the network's largest remote undertaking. ESPN, ESPN2 and ABC's Wide World of Sports broadcast approximately 37 hours of original programming

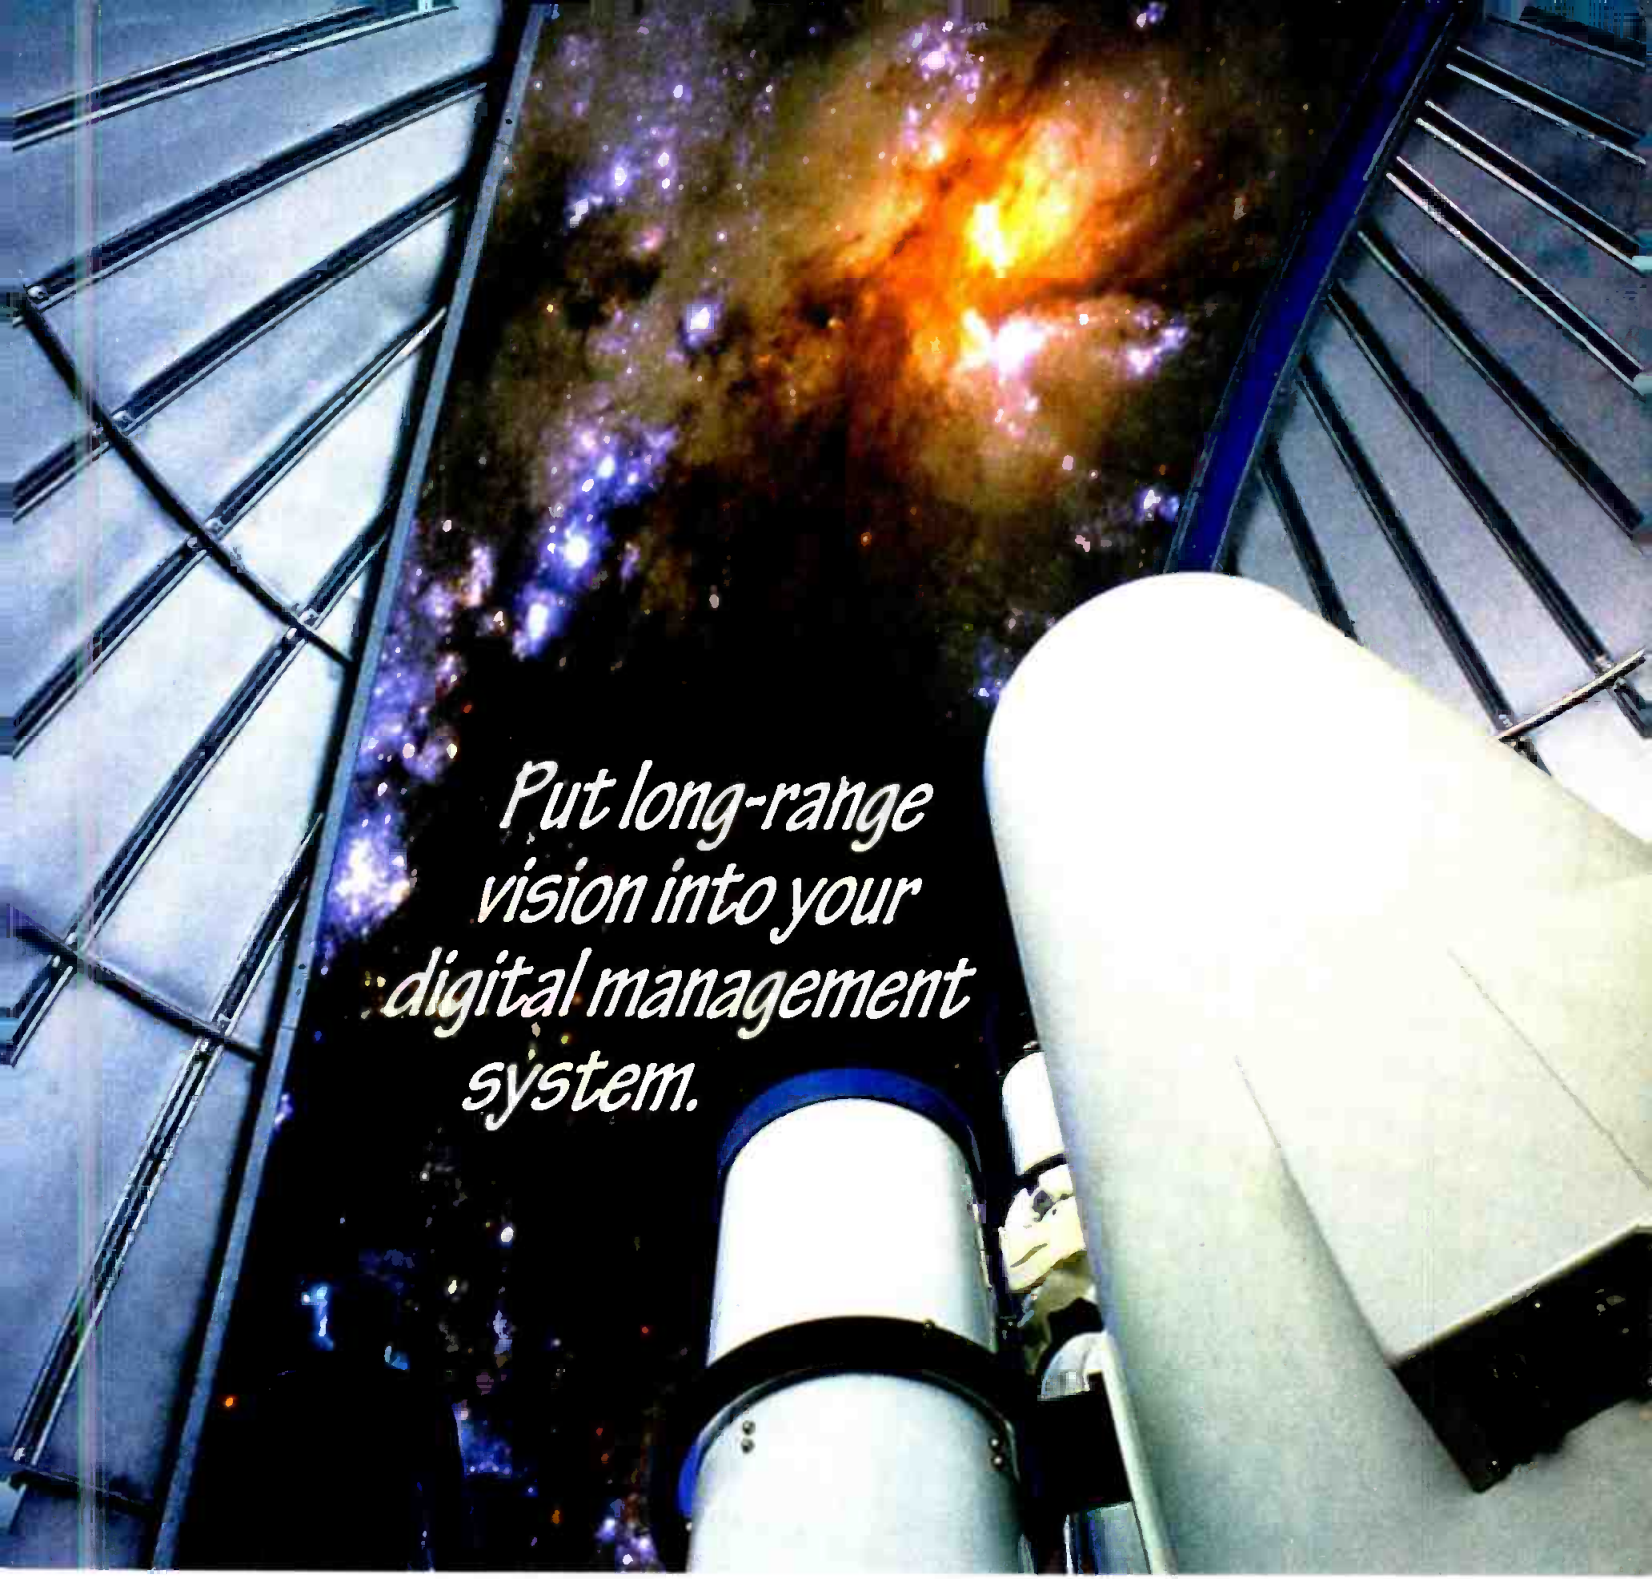

*Put long-range
vision into your
digital management
system.*

Conceived with a vision, the **Roswell™ Facility Management System** puts you in complete control of your digital future. Designed specifically for multichannel digital TV, the Roswell system provides complete workflow automation; from traffic scheduling to on-air operations.

The Roswell system will manage your metadata and electronic program guides, along with the material, media, and playback resources in your facility. And Roswell tightly integrates with our new **Bowser™ Visual Asset Manager** to let you see and hear digital material from the convenience of any PC workstation.

To see the benefits of perfect vision, contact your nearest Odetics Broadcast representative today.



Your safe haven from the winds of change.

The Americas (714) 774-2200 Europe +44 (0) 118 927-4600 Asia +65 324-0636

www.odetics.com/broadcast/ Email: broadcast-sales@odetics.com

© Odetics, Inc. 1998 12884

Circle (6) on Free Info Card
www.americanradiohistory.com

in 177 countries and territories. More than 400 ESPN TV crew members were required to produce and film the games, and another 3,236 people filled volunteer positions. It took 600 man hours alone to build the massive climbing walls used in the sports-climbing competitions.

The ESPN production center was the largest digital production unit used at a sports event to date. The Games also marked the first time that ESPN used non-linear editing systems and a disk-based technology for live-event coverage.

The sports network used fiber optic to network everything in the production-area park, such as intercom interfaces, shared equipment, and even a camera strategically placed on the roof of the nearby Hyatt Hotel for a bird's eye view of the Games. The transmission fiber system tied the broadcast center to all of the venues with 32 audio, eight video, seven intercoms and several data. Telecast Fiber-Optic Systems was used for this fiber-optic network, and with the fiber-optic network, ESPN was able to provide video and communications throughout the park where the Games took place. This allowed anyone on the ESPN crew to communicate with other members of the crew. It also provided the ability to access feeds from the various locations.

The broadcast center was set up like a small village with various production units to cover the 10-day event. The hub of the center was set up at Mariner's Point in close proximity to a majority of the games. An NEP trailer was located in the center of the production area, and video was played back in the



To catch action shots at the X Games, approximately 100 camera positions were used, including 30 specialty/point-of-view cameras that were placed on equipment, as well as on the athletes.

NEP trailer, which had seven host-set cameras from the venues. The mobile unit featured several Scitex Abekas products, including Brutus, five DVRs and Dveous for effects. Technical director for the Games, Steve Laxton, said, "Most of the big trucks today are still analog composite, and a lot of component digital gear isn't flexible enough to be fully integrated in an analog composite environment; Dveous and Brutus can interface simultaneously with analog composite and 601, which gives all the advantages of infinite layering and multigenerational performance in a live environment." The truck's CCIR-601 environment combined the Brutus effects system with a Dveous effects system and four Clipstore DDRs, allowing up to 12 images to be processed simultaneously. The Abekas Dveous and A51 DVEs were standard equip-

Don't go grey

Go PlatinumTM

Starting at only \$164k

Yes, starting at only \$164k you can kiss goodbye that old linear suite and go on-line, non-linear with the all-new Editbox Platinum.

You can have it all:

- Superb 601 non-compressed quality
- Awesome Editbox speed and productivity
- 16:9 DTV ready today!
- Flexible, integrated video and audio tools
- Fabulous effects power
- Unbeatable cost-effectiveness
- Great ROI
- Super user-friendly interface
- All that and more starting at only \$164k

Seeing is believing. Book your demo today.

Don't wait, call 1 800 218 0051 ext. Platinum

Blondes have more fun.



EDITBOX[®] PLATINUM
the seriously affordable Editbox

Quintel Inc., 28 Thorndal Circle, Darien, CT 06820 Tel: +1 203 656 3100 Fax: +1 203 656 3459 <http://www.quantel.com>

Circle (7) on Free Info Card

www.americanradiohistory.com


ment on many of the other remote trucks.

In the production-area park, the NEP trailer was surrounded by a variety of other production trailers. An event such as the X Games requires an abundance of graphics, and a double-wide trailer housed the graphics production center. Next door to the NEP trailer, five edit rooms were established in the Hyatt Hotel. Four of the five edit rooms had digital Beta-cam suites supported by Abekas switchers and Dveous effects systems. One of the edit suites located in the Hyatt was an audio sweetening room that was supplemented by a second room with a special sound booth set up for voice-overs. ESPN also rented Sony's Travel Edit Suite, and edit facilities were stationed at each of the three venues.

For rapid turnaround on-line editing of the Games, ESPN used the Tektronix Lightworks V.I.P.4500 non-linear digital editing system. To catch action shots, approximately 100 camera positions were used, including 30 specialty/point-of-view cameras that were placed on equipment, as well as on the athletes. This fully-equipped "point-of-view SWAT team" captured unique angles, such as a view from underneath a skateboard to show the rotation of the wheels. For live action, a Hitachi HV-D3 camera was placed on a gyro-stabilized head and suspended from a CableCam. Via remote control, the camera ran back and forth on a cable that ran between various events, such as the aggressive in-line skating and the BMX bike

competitions.

The Sony HDCAM camcorder, HDW-700 and the HDW-500 were also used for skysurfing events, with some cameras located on the helmets of the skysurfers. Using the HDW-700, ESPN downconverted the material to air in NTSC and also edited HDCAM.

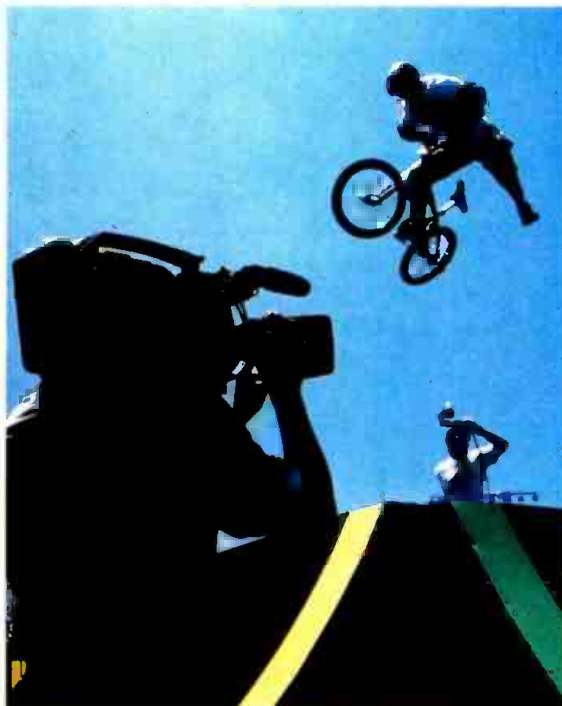

The ESPN crew used a Sony HD camcorder to record several of the X Games events, such as bicycle stunt competitions.

For this year's coverage of the X Games, ESPN's goal was to break new ground and offer viewers an innovative and entertaining presentation. The nature of the X Games provided the perfect opportunity to provide this type of coverage. For example, many transitions were used between tape packaged material and live material to achieve the high-energy effect associated with the X Games. The crew experimented with various techniques on the fly and even field-tested new equipment during the production of the Games. The ESPN production crew relied on a variety of Scitex Digital Video's Abekas video post-production equipment to create the looks for the X Games coverage. The result was in-your-face

coverage of athletes living on the edge that was viewed by approximately 280 million households.

After two years in San Diego, the search is on for a new location for next year. X Games officials said that by changing locations from time to time, more athletes have a chance to participate. If the X Games stay true to form, next year's Games promise to be even bigger and better with a location yet-to-be announced. ■

Wedding bells for AT&T and TCI

Catching the industry by surprise, AT&T's chairman and CEO, Michael Armstrong, and TCI's CEO John Malone, announced an agreement for a communications-industry deal that could shake up the landscape for many years to come. The nation's largest long-distance company had been a suitor for numerous deals over the last few years, none of which were completed. Likewise, Malone's TCI was the bride at the 1994 Atlantic Bell wedding, but the groom bolted after the cable company's

stock fell. This time, both personalities and finances clicked, and a wedding is apparent.

Corporate branding

Under the deal, a new division will be formed, called AT&T Consumer Services. The unit will provide a broad set of consumer communications services — including local, long distance, wireless and international communications, cable television, dial-up and high-speed Internet access services — all under the

AT&T brand name.

According to sources, AT&T Consumer Services will own and operate the nation's most extensive, broadband local network platform. Following the merger, the new unit intends to significantly accelerate the upgrading of its cable infrastructure, enabling it to begin providing digital telephony and data services to consumers by the end of 1999, in addition to digital video services. This is where the merger with TCI makes sense. "Today we are beginning

THE POWER OF ONE

Ikegami's HL-V59 / Betacam SP Camera / Recorder.

Combine the top-of-the-line portable camera from the #1 camera manufacturer, with a leading recorder format (Betacam SP) and you've got the HL-V59 one-piece camera/recorder. This digital processing CCD camera (along with the HL-V59W 4:3/16:9 switchable version) features newly developed Application Specific Integrated Circuits (ASICs) and enhanced CCDs for exceptional quality and improved functionality.

The HL-V59 employs three high-performance 2/3" 520,000-pixel FIT CCDs, which deliver over 900 TVL, and a S/N ratio of 62dB or more.

The Hyper Gain feature allows improved sensitivity up to +42dB, a real advantage

and benefit when shooting under poorly illuminated conditions.

Ikegami's Emmy-Award Winning Skin Tone Detail with AHD (Auto Hue Detect) feature, also known as "The Fountain of Youth", are digitally generated along with Diagonal DTL, Slim DTL, DTL Boost Frequency and Black Stretch. The HL-V59 also features a new high performance viewfinder.

For the one-piece camera/recorder that's one step ahead, contact your Regional Sales Office or the Ikegami dealer nearest you.



THE PROFESSIONAL'S CHOICE

HL-V59

Ikegami Electronics (U.S.A.), Inc. 37 Brook Avenue, Maywood, NJ 07607 East Coast: (201) 368-9171
West Coast: (310) 534-0050 Southeast: (954) 735-2203 Southwest: (972) 869-2363 Midwest: (630) 834-9774
Website @ <http://www.ikegami.com>

Ikegami

Betacam SP is a registered trademark of Sony Corporation.

Circle (8) on Free Info Card
www.americanradiohistory.com

WARD-BECK PROFESSIONAL BROADCAST EQUIPMENT

STANDS ALONE

Legendary design
Legendary quality
Legendary construction



AFFORDABLE BY COMMITMENT



WARD-BECK SYSTEMS LTD.

TORONTO, ONTARIO, CANADA M1H 2X4

TEL: (416) 438-6550 FAX: (416) 438-3865 TOLL FREE 1-800-771-2556

website: www.wbsltd.com e-mail: wbsltd@istar.ca

8200 SERIES
DIGITAL/ANALOG
AUDIO
DISTRIBUTION
SYSTEM



The secret to lowering costs, improving performance, is knowing with whom to consult. Make Ward-Beck your first call.

Audio Consoles, Digital Audio Products, Analog Audio Distribution Products, Metering Products, Pods, low cost Broadcast Problem Solvers, Standard and Custom lines.

Circle 9 on Free Info Card

to answer a big part of the question about how we will provide local service to U.S. consumers," said AT&T's Armstrong. What remains to be defined is how fast those new services can be rolled out.

"This merger is a tremendous growth opportunity for TCI's shareowners and employees," said John C. Malone, chairman and CEO of TCI. "As TCI continues the large-scale deployment of advanced digital set-top devices, AT&T's extraordinary brand and resources are ideal complements to TCI's broadband cable distribution and operations. AT&T Consumer Services will offer consumers a wide variety of entertainment, information and communications products, which thoughtfully address personal tastes, needs, choice and convenience."

AT&T Consumer Services will provide its services to consumers through a combination of its own broadband networks and services it will procure from others, including AT&T. The new unit will include all of the cable TV systems AT&T is acquiring in the merger with TCI, as well as AT&T's fixed wireless technology and related spectrum rights covering more than 90% of the nation. When the merger and pending TCI cable system transactions are complete, AT&T Consumer Services' wholly owned and affiliated cable systems will pass 33 million homes.

Mutual synergy

Through the acquisition of TCI, AT&T Consumer Services will also hold a controlling interest in the @Home Network, a provider of high-speed Internet access and content services. @Home currently has affiliate agreements with TCI and several major cable companies that collectively pass more than 50 million homes.

Both companies talked of the mutual synergy that will result from the deal. The companies anticipate their merger will result in increased revenue and lower costs of about \$2 billion per year beginning three years after the merger closes. For example, the merger is expected to improve TCI's cable service penetration and improve customer retention for AT&T's consumer long-distance service. It will also help reduce the charges that AT&T pays to local telephone companies to handle long-distance calls and allow both companies to reduce their respective customer care, billing and advertising expenses. This probably means TCI customers can expect to see the ATT telephone guy knocking at their door in the near term. The phone company has complained loudly for years about the rates it has to pay ROBCs for access to customers. Now those rates can be reduced greatly by using TCI's broadband network for access into the home.

Armstrong said his company "...is now better positioned for growth. When this transaction is completed, AT&T will be the undisputed leader in three of the fastest growing segments of the communications services industry—consumer, business and wholesale networking services." Despite such optimistic statements from its chairman and CEO, AT&T's share price fell 8.2% to \$60 upon the announcement. Meanwhile, TCI's stock rose just over a dollar to \$39.75. The cable company's two other trading stocks, Liberty Media Group and TCI Ventures, also gained on the announcement. ■

**The world may never
agree on standards.**

That's no problem for Integrator.



And you won't need to call The World Bank.

The Integrator™ combines multiple signal formats, both analog and digital, to give you a world of options. In a single 4, 6 or 8RU frame, Leitch integrates your custom combination of analog video, serial digital video (coax or fibre with automatic re-clocking and equalization), 1.5 Gb/s high definition (16x16 version only) and analog audio. The Integrator gives you deterministic, field-accurate switching in an architecture that offers dual outputs and (individually configurable) serial ports;

redundant hot-swappable power supplies and control logic; and field expandability from 32x32 to 128x64. With Integrator control you also get flexible soft-matrix partitioning of hardware matrices, crosspoint restriction and virtual mapping, protection and locking.

*The Integrator is everything you need in a router.
And that's something the world can agree on!*

www.leitch.com



Distribution



Routing



Digital Glue



Production Products



Storage



Sync & Test



LEITCH

ENGINEERING THE BIG PICTURE™

International/Canada +1 (416) 445-9640, (800) 387-0233 • U.S.A. +1 (757) 548-2300, (800) 231-9673 • Latin America +1 (305) 884-5484


Europe +44 (0) 1256-880088 • Australia +61 (2) 9939-3355 • Japan +81 (3) 5423-3631 • Brazil +55 (11) 867-0218

Circle (15) on Free Info Card

www.americanradiohistory.com

LOOKING FOR A WAY TO TEST

THERE'S ONLY ONE



HP ESA-L1500A Portable Spectrum Analyzer:
Low cost, high dynamic range, spectrum analyzer for return path and ingress maintenance.



HP 8594Q QAM Analyzer:
Transition smoothly to digital RF testing with comprehensive RF, modulation and data quality measurements.



HP E6277A MPEGscope DVBplus:
Real-time measurements and monitoring of MPEG streams.



HP 8591C Cable TV Analyzer:
The industry's only one-box tester for all non-interfering RF and video measurements.

Your subscribers depend on you—you can depend on Hewlett-Packard. HP has dedicated itself to keeping your broadband system at peak performance by providing a complete range of test solutions for:

- R & D • Manufacturing • Headend • Field

Be Prepared for the Interactive Technology of the Future.

To stay competitive, you have to be prepared for new digital technologies—including interactive services. And you have to know that the products you buy

YOUR NETWORK FROM END TO END?

ROAD TO TAKE.



HP H6000A Mini-OTDR:
Fast, easy and accurate optical fiber analysis during cable installation, maintenance and restoration.



HP 89440 Digital Video Modulation Analyzer:
Lets you characterize QAM signals on cable systems and VSB signals used in broadcast transmissions.



HP E4480A SDNET/ATM/T-Carrier Test Set:
A field-portable test set for installation, qualification and maintenance of optical networks.



HP CaLan 3010R/H Sweep/Ingress Analyzer:
Install and maintain forward and return paths quickly and accurately, all in the presence of ingress.

today will meet your needs well into the future. HP gives you a unique range of products to make sure your cable system always delivers quality service to your subscribers.

Performance from End to End.

There's only one way to go for broadband test products: HP. No one offers a more complete range of test equipment to keep your entire broadband system up and running today—and down the road.

For more information, call: 1-800-452-4844, Ext. 5663

©1998 Hewlett-Packard Co. TMMID730.2/BE

www.hp.com/go/catv



**HEWLETT®
PACKARD**

Circle (16) on Free Info Card
www.americanradiohistory.com



FCC to audit children's commercial time

BY HARRY MARTIN

The FCC has announced that it will conduct unannounced, off-the-air audits of commercial TV stations. These audits will search for violations of the commission's rules limiting the amount of commercial matter aired during children's programming. Effective May 20, all commercial TV licensees will be subject to this auditing process. The commission has indicated that if violations are found, substantial forfeitures will be assessed.

The FCC's rules limit the amount of commercial matter that can be aired during children's programming to 10.5 minutes per hour on weekends and 12 minutes per hour on weekdays. TV licensees are required to report on their renewal applications whether they have complied with the commission's commercial limit rules.

The new audit program was sparked by the large number of violations of the commercial limit rules reported in the current renewal cycle. The FCC reported that 26% of reporting TV stations could not certify full compliance with the rules. The commission found this level of noncompliance to be "unacceptable."

FCC revokes license

The FCC revoked the license of a Texas station after finding that the licensee made numerous misrepresentations and lacked candor in requesting special temporary authority (STA) to operate from a different site. The misrepresentations involved two different aspects of the STA request.

First, the licensee asserted that it had lost its licensed site. However, at the license revocation hearing, the licensee admitted that the change in site was purely voluntary. Second, the licensee lacked candor about facts regarding the proposed STA site. The new site was so far from the community of license that the station would no longer provide local service and would serve a nearby larger market for the first time.

The STA request only provided the coordinates of the licensed site.

In addition, when the FCC's staff advised that it would not grant the STA's request to construct a new tower, the licensee arranged for a business associate to construct a tower adjacent to the site proposed in the STA request. The licensee then amended the STA request

evasive responses.

In revoking the license, the FCC held that neither the station's meritorious programming nor the licensee's prior unblemished record could mitigate serious deliberate misconduct. The commission emphasized that honesty and trustworthiness are fundamental obligations of commission licensees.

TV translator/LPTV displacement applications

The commission is now accepting "displacement" applications on a first-come-first-served basis for TV translator and LPTV stations displaced as a result of the recently adopted DTV Table of Allotments and by the reallocation of Channels 60-69 to non-broadcast services. Licensees and permittees subject to displacement should act quickly to avoid being forced off the air.

Filing fees to increase

Increased FCC filing fees for many applications and other filings are scheduled to go into effect Sept. 21. Although most fees have increased, the filing fee for annual ownership reports has not changed (\$45/station). Filing fees for the more common filings by broadcasters are listed in Table 1. ■

Harry C. Martin is an attorney with Fletcher, Heald & Hildreth, P.C., Rosslyn, VA.

Minor change	\$725
New or major change:	
TV	\$3,245
AM	\$2,885
FM	\$2,600
Translators/LPTV	\$545
License Application:	
TV	\$220
AM	\$475
FM	\$150
Directional antenna:	
AM	\$545
FM	\$455
Translators/LPTV	\$110
Auxiliaries	\$110
Assignment/Transfer:	
Long Form	\$725
Short Form	\$105
STA	\$130
CP Extension	\$260
Renewal:	
TV/AM/FM	\$130
Translator/LPTV	\$45
Call-Sign Change	\$75
Ownership Report	\$45

Table 1. New filing fee schedule.

to specify use of the "existing" tower.

Further, when providing coordinates for the "existing" tower in the amendment, the licensee referred to the coordinates specified in the initial STA request, inferring that the "existing" tower was only 0.25km from the licensed site. In granting the STA, the FCC relied on the 0.25km variance, and the licensee did not tell the FCC that it was incorrect. When the FCC discovered the errors and rescinded the STA, the licensee made further deceptive and

Dateline

On or before Aug. 3, commercial TV stations in North Carolina, South Carolina, Illinois, Wisconsin and California must file their annual ownership reports.

Also on Aug. 3, TV, TV translator and LPTV stations in California must file their 1998 renewal applications. TV translators and LPTVs in Nebraska and Kansas also must file by Aug. 3.

TV, TV translators and LPTVs in Alaska, Hawaii, Oregon and the Pacific Islands must file their renewals by Oct. 1. TV translators and LPTVs in Iowa and South Dakota are also subject to the Oct. 1 renewal filing deadline.

Why are more video professionals switching to BASF Betacam tape?


Ask Michael Alexander, producer for CableTime, the country's largest third-party turnkey cable advertising company

"In the cable business, we have to shoot commercials efficiently. That means that the people, the equipment and the media have to get it right the first time. That's why we're very picky about the tape we use."


"Honestly, the first thing that attracted us to BASF was the recommendation of another producer. So we tested BASF. I shot several hours' worth of footage in Mexico City. When I watched the tapes, I

couldn't find any dropouts. I brought in my boss. We stared and stared at the footage, and we just couldn't spot any dropouts. BASF's lack of dropouts is what got us to switch. Our old brand practically guaranteed two dropouts a minute!"

Discover BASF's legendary quality today by calling the toll-free number below or visiting our Web site to locate your nearest authorized BASF dealer.

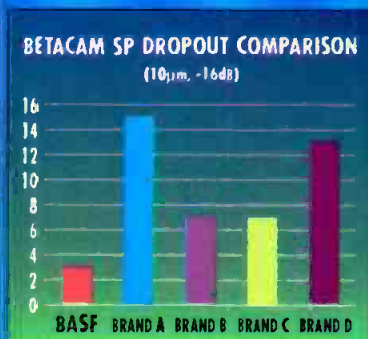

In a 20 minute test, BASF Betacam SP Mega has the lowest dropout rate of any brand.

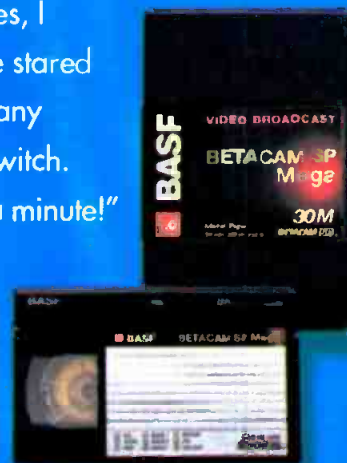

When consistency counts, choose BASF.

EMTEC Magnetics



Distributed in North America by EMTEC Pro Media, Inc. ☎ US 1-888-295-5551 Canada 1-800-817-4478 or visit our web site at www.emtec-usa.com

Circle (26) on Free Info Card

www.americanradiohistory.com



No space for DTV

BY LOUIS LIBIN

Electronic newsgathering is one of the crucial requirements for a new terrestrial broadcast service. Dating back to 1987, the FCC, along with the FCC Advisory Committee on Advanced Television Services, analyzed spectrum allocations that could impact the non-broadcast services associated with the implementation of an advanced TV service. Regarding the microwave spectrum, the FCC Advisory Committee specifically recommended that new spectrum should be assigned for broadcast auxiliary.

The Advisory Committee also made specific recommendations on new spectrum locations. Broadcast auxiliary use of spectrum (BAS) in most medium-sized markets is highly congested. The reality is that in the beginning of the transition, before most stations originate local news specifically for the channel, the demand for BAS spectrum may be only slightly greater than it is today. However, as broadcasters begin DTV newscasts, BAS usage will increase, and it will probably coincide with a further decrease in available spectrum.

BAS applications

BAS is used by TV stations to convey their signals on a point-to-point basis. Its primary uses are for STLs, intercity relays (ICRs) and electronic newsgathering (ENG).

The non-broadcast video transport falls into two general categories. The first group of services provides contribution transport over the path from the source of the program signal to the studio. Temporary microwave pickup, ENG, network-to-studio feeds and fixed microwave repeaters are examples of contribution transport services. The second category involves distribution transport over the path from the studio to the viewer. Distribution networks include feeder services, such as PMRS, OFS, STL and CARS, and broadcast services, such as DBS, ITFS and MDS. For

STLs, the least expensive solution requires total simulcast. Equipment manufacturers will produce radios specifically for the 20Mb/s DTV datastream. Using 16QAM modulation, it would fit within 2GHz or 7GHz channels. At the transmitter site, you would feed the data directly into the DTV transmitter and downconvert one of the DTV programs to feed the simulcast NTSC transmitter. If a station wants

In the present environment, there is no provision for the possibility of new spectrum for broadcast auxiliary spectrum.

to use different feeds, but use the same microwave channel, a 7GHz channel is wide enough for a typical 45Mb/s (DS3) digital radio. You can multiplex a DTV 20Mb/s signal and a slightly compressed 20Mb/s NTSC program within this datastream. You will need to relicense the channel for this use. Manufacturers may need to have their equipment type accepted in this band.

Broadcasters currently conduct broadcast auxiliary operations in the 1,900-2,110MHz band (six channels of 17MHz and one channel of 18MHz). In March, 1997, the FCC reduced this allocation by 15MHz and forced broadcasters to relocate to the 2,025-2,130MHz band (seven channels of 15MHz) by the year 2000. Mobile Satellite Service (MSS) licensees have to pay for the relocation. While the MSS participants were pressing for reconsideration, Congress caused the issue to be "overtaken by events." The Balanced Budget Act of 1997 requires the FCC to auction much of this spectrum by 2002.

Distribution channels destined for ter-


restrial VHF/UHF broadcast sites should require infrastructure transport bandwidth commensurate with that required by the 8VSB system. The cost of duplicate transport and the need to conserve spectrum may dictate that DTV-to-NTSC conversion take place only at the transmitter site. Of course, this option is only available when programming on both systems is identical. Distribution to destinations other than terrestrial VHF/UHF broadcast transmitters may require significant additional bandwidth depending on the capability of the final segment of the delivery system. For example, transport of DTV signals to cable or DBS head-ends will probably require additional bandwidth.

Auxiliary spectrum status

Broadcasters' auxiliary spectrum continues to be successfully targeted by many. The FCC recently amended the rules for Parts 74, 78 and 101 regarding auxiliary broadcast services requiring permanent coordination criteria between this service and government operations in the 17.8 to 19.7GHz. This is not an isolated incident related to broadcast auxiliary spectrum.

It is clear that at least in the major markets, new and innovative STL and ENG solutions will be required. In many cases, broadcasters already have set their preliminary plans, and this includes transmitting multiple programs at the same time. This means additional BAS circuits will be required and they do not exist. The reality is that new BAS spectrum should be pursued at the present time. In the present environment, however, there is no provision for the possibility of new spectrum for broadcast auxiliary spectrum. However, there are new technologies available to assist and alleviate the spectrum congestion. ■

Louis Libin is a broadcast/FCC consultant in New York and Washington.

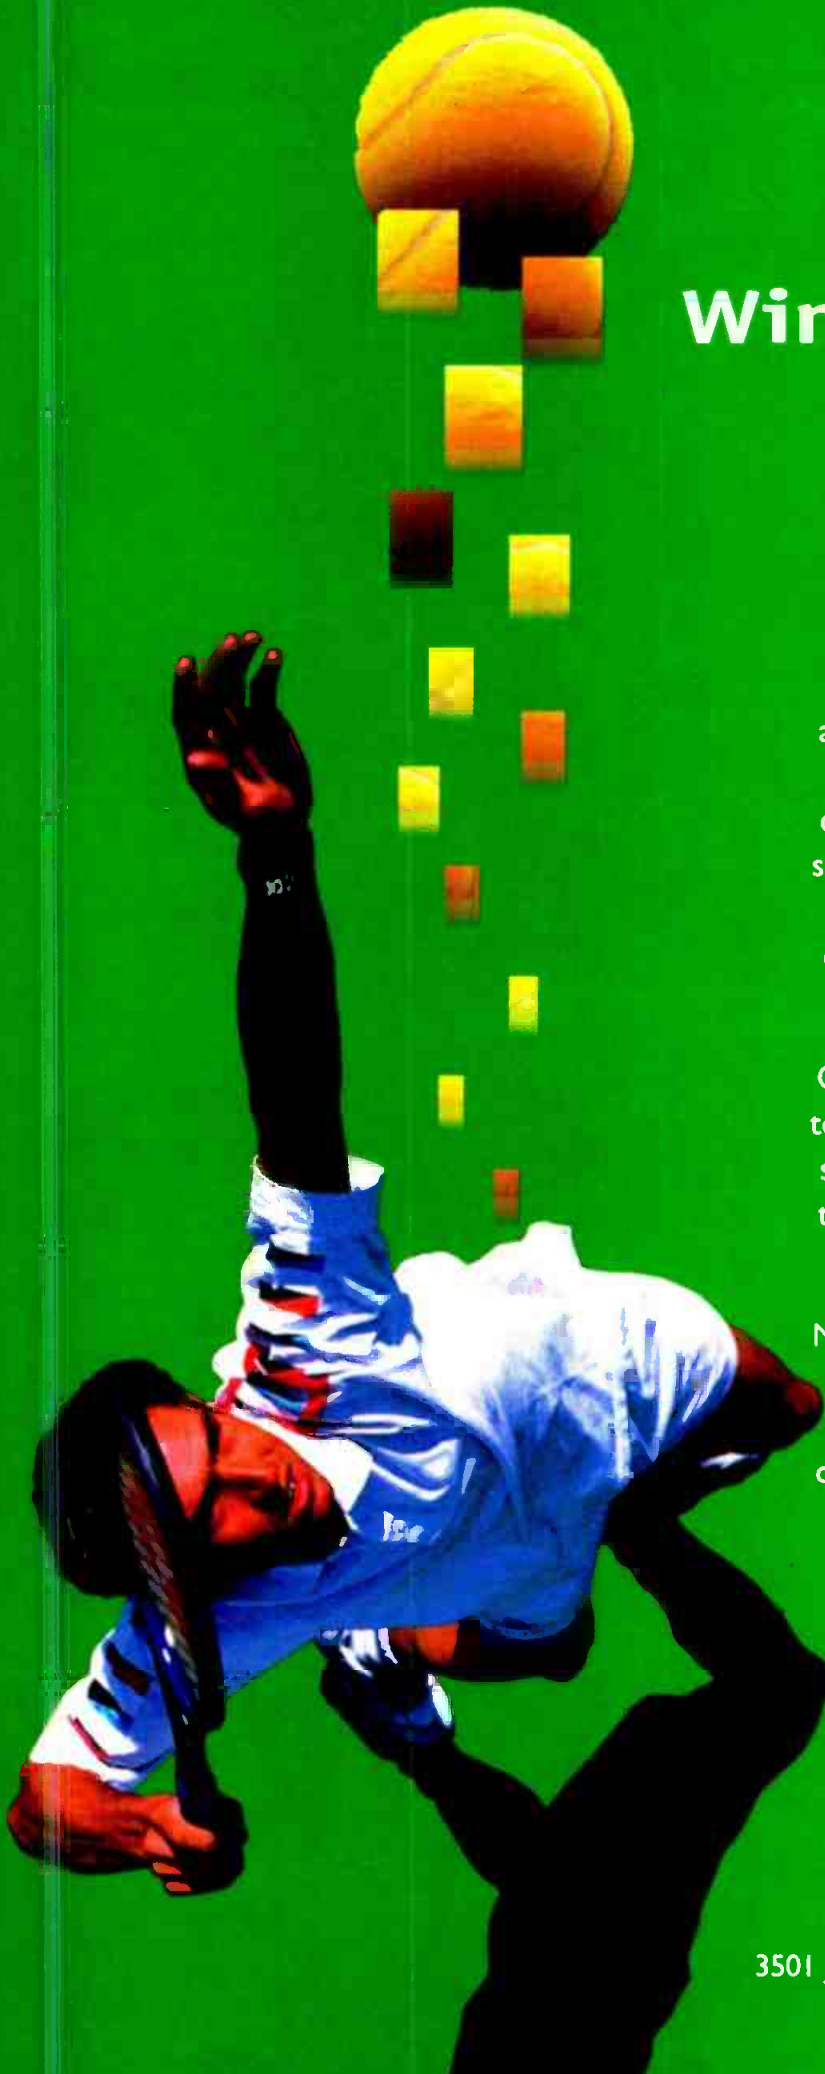

We're sending Wimbledon around the world.

At major sporting events like Wimbledon, and The World Cup, there are some real heroes in addition to the athletes. Round the clock efforts by teams of dedicated broadcast professionals capture every second of the nonstop action and send it around the world. These professionals rely on NDS for high quality 4:2:2 and 4:2:0 digital contribution equipment to deliver the winning pictures every time.

Outdoor, indoor, mobile or fixed, when it comes to contribution, NDS has the most cost effective solutions to highest quality digital feeds available today. And you'll find our solutions will save you valuable time and bandwidth.

NDS has the end-to-end solution for every digital television resolution. We are your clear choice for compression, multiplexing and modulation, conditional access and software to integrate and manage your broadcast operation.

Capture the drama of tennis, football, news, or special events. Choose NDS — the right partner for a winning team.



NDS Americas Inc.
3501 Jamboree Road Suite 200, Newport Beach, CA 92660
949.725.2554 www.ndsworld.com

Circle (18) on Free Info Card

Interactive TV: Real or hype?

How do you see interactivity becoming a part of the TV viewing experience?"

EXPERT

In the next few years, digital entertainment will change our audience's TV viewing habits. Our audience will have an enormous amount of choices. In simple terms, they will be able to view entertainment and access lots of additional information. But how is this going to fundamentally change the way our viewers behave, and more importantly, what changes do we as broadcasters have to make?



Steven M. Blumenfeld,
Director,
Business
Alliance, GTE
Interactive
Media

Our viewers will start to become "users." They will use the information we broadcast to enrich the viewing experience and to gain additional satisfaction from increased data. The users will not only have choices of viewing, but will be able to tailor the viewing and information available to them. With so much available, the role of the broadcaster will be to become a filter. The users will look to us to simplify their choices. In other words, the broadcaster will portray a certain viewpoint,

and a user will subscribe to that viewpoint. An example: user A may believe in the Disney philosophy and therefore subscribe to the Disney filter. On the other hand, user B may be more aligned with *Seventeen* magazine. Our users will most likely have multiple filters.

So how does this new way of looking at our viewers change our jobs? First off, we will start hiring a different type of employee. Information management and social scientists will start penetrating the management of broadcast facilities. With this, we will see a beefing up of our data-research staff, and we will rely on them to set the tone for our users. Our much trusted video engineers will give way to data engineering talents.

Words like dispersion and fusion splicing will become common place in our vernacular. Dispersion is the cause of bandwidth limitations in a fiber and causes a broadening of input pulses along the length of the fiber. Fusion splicing is a permanent joint accomplished by the application of localized heat sufficient to fuse or melt the ends of the optical fiber, forming a continuous single fiber. We will hire network engineers with specific knowledge in ATM, routing and switching. Interactivity means opportunity and challenges for broadcasters. We just need to perceive them in that light. ■

VENDOR

With the move to digital broadcasting, many broadcasters are evaluating the deployment of interactive TV infrastructures. Along with the promise for new and exciting content, interactive television presents the opportunity to create new business models based on innovative revenue streams.

On the viewing side, TV audiences will now be able to access a wealth of entertainment, information



Dr. Dov Rubin,
Vice President &
General
Manager, NDS
Americas Inc.

and opportunities using their familiar remote control. They can bank, shop, browse the Internet and find out more about a new car. They will be able to play along with their favorite game show and win prizes without leaving their living room. The possibilities are virtually endless.

Predictably, initial adoption of interactive television will come from advertisers. They will derive clear returns from access to more targeted prospects and the ability to capture the audience's attention for the duration of the controlled message through viewer involvement.

The types of interactive ads that are expected to be most popular include *product information ads* that allow viewers to receive detailed information about a product, *incentive ads* that reward viewers for watching and *targeted ads* that target specific markets. However, no matter how attractive interactive programming appears, broadcasters must undoubtedly weigh the associated costs and expected ROI for deploying the new technologies. Although it's impossible to absolutely qualify the increased business opportunity that interactivity will produce at this early stage of digital convergence, the cost of existing deployment methods can be easily investigated. The enabling technologies to deploy interactivity already exist. These core technologies offer broadcasters the ability to provide advertisers with a host of services.

Digital television has arrived. With it, interactive functionality promises many benefits. Broadcasters will benefit from new business models that increase revenue opportunities; content providers will attract larger numbers of viewers; and advertisers will parlay interactivity into increased demand, sales and brand equity. ■



80,000

hours of TV at
your fingertips.

(Eyedrops not included.)

StorageTek® can help you transition all your station's video to digital and ensure that the only things you risk straining are your eyes. Our MediaVault broadcast solutions deliver fully automated digital archives that are reliable and can store from 80 to 80,000 hours of video. So you can digitally access program material, improve efficiency, lower maintenance costs and reduce errors. And we have the hardware, software, 24 x 7 service and 25 years' experience to make the transition successful. In short, MediaVault eases the pressures on your mind and your wallet. Your eyes, however, are another story.



First look at this. Call 1-800-STORTEK, ext. 400.

See how we've helped major stations
transition to digital video.

www.storageitek.com/video


See us at Siggraph Booth #1251

StorageTek

Where the world's information goes

© 1998 Storage Technology Corporation. All rights reserved.
StorageTek is a registered trademark of Storage Technology Corporation.

www.americanradiohistory.com

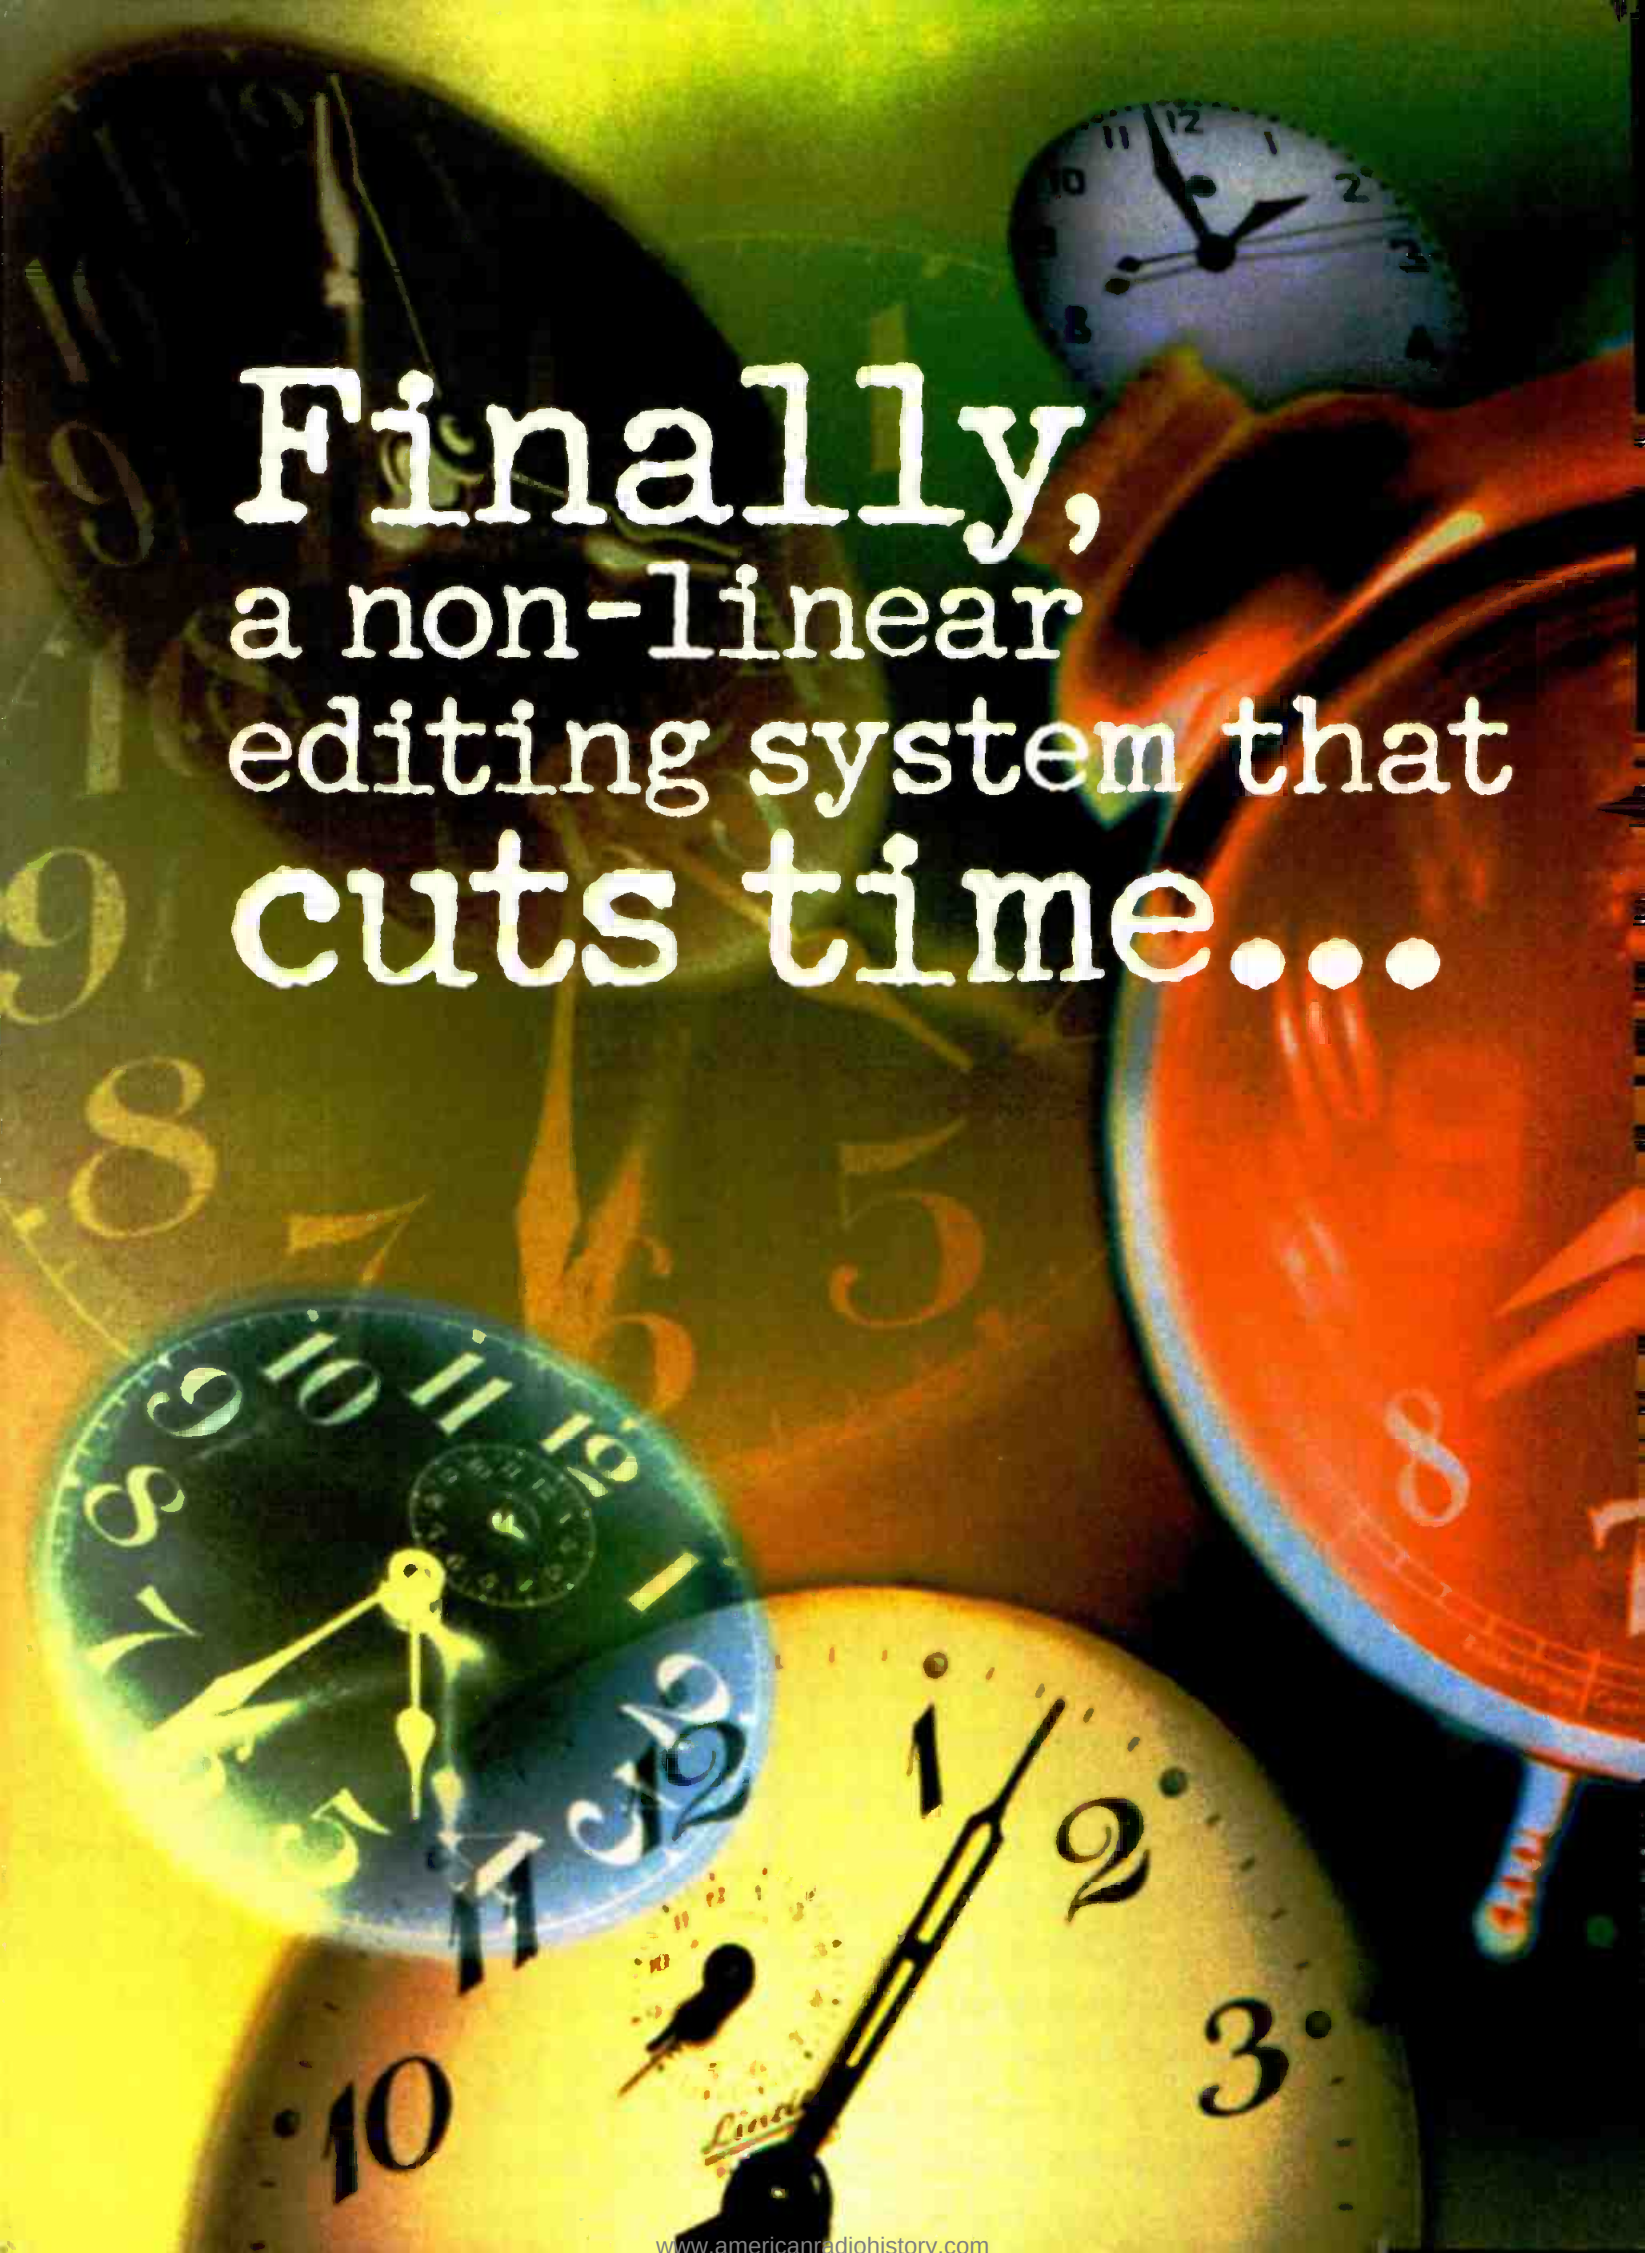

Finally,
a non-linear
editing system that
cuts time...



not quality.

Introducing TimeGate™

You can't add more hours to your day. You can, however, add JVC's TimeGate Non-Linear Editing System for basically the same effect.

Endless rendering time becomes a thing of the past, as TimeGate's real-time, all-the-time capabilities expand both your creativity... and your productivity. Real-time 4:2:2 effects include more than 140 different wipes and 2D DVE effects. An unprecedented four simultaneous effect layers eliminate the need for compositing, and real-time audio effects include dissolves, fades, rubber banding and more. And that's just the beginning.

The all-in-one, Windows NT-based system delivers all this because of 4:2:2 component digital processing at an impressive 270 Mbps data rate. The end results are finished productions that are not only completed faster and more efficiently than ever, but also are virtually indistinguishable from D1 uncompressed recordings.

The hybrid system is compatible with most analog and digital tape formats, and is fully optimized with JVC's DIGITAL-S. TimeGate can be configured from input to output with a variety of video paths to meet the needs and performance parameters of virtually any user. And compression ratios from lossless to 30:1 offer the flexibility for different applications and quality requirements.

There's much more to tell about TimeGate. Contact your authorized dealer, call JVC at 1-800-JVC-5825, or visit our Web site at www.jvcpro.com

TimeGate™

JVC
PROFESSIONAL

Circle (11) on Free Info Card

www.americanradiohistory.com

Audio levels and metering in digital and hybrid environments

BY MICHAEL ROBIN



In recent years, digital audio recorders have almost completely replaced conventional analog recorders. In many cases, these digital machines are installed in otherwise analog audio environments, resulting in a considerable improvement of the audio quality. This article deals with some audio-signal level constraints typical of analog and hybrid environments.

Dynamic range

In audio environments, the overload level, also called maximum operating level or maximum output level (MOL), is usually defined in terms of acceptable total harmonic distortion (THD). Although there is no universal agreement on the maximum accepted value for THD, 1% is generally quoted for audio consoles and distribution amplifiers. Analog audio equipment is adjusted such that the MOL is higher than the

standard operating level (SOL). The difference between MOL and SOL, expressed in dB, is called headroom.

The MOL of an audio console or audio distribution amplifier is usually specified as 10dB or more above the SOL. Higher values of headroom may be needed when VU meters are used for audio-signal level monitoring. Audio mixing consoles are also specified in terms of maximum input level (MIL). The MIL of an audio mixing console is the microphone input level at which the THD caused by the microphone input pre-amplifier is 1%. The input headroom of an audio mixing console is the difference between the MIL and the rated input level (e.g., -60 dBu). Input headroom specifications for audio consoles are between 20dB and 35dB.

The minimum acceptable signal level in a system is closely related with the acceptable SNR at low signal levels.

This is clearly an operational decision. Ideally, the SNR at the lowest acceptable signal level should not be lower than 40dB. Table 1 lists the theoretical SNR at a standard dynamic microphone output for several sound pressure levels (SPL) under open load conditions. This table shows that 40dB SNR can be achieved at an SPL of 61dB, assuming ambient noise in the studio is 0dB SPL. Higher ambient noise levels will raise the minimum acceptable signal level.

The dynamic range is defined here as the difference, expressed in dB, between the MOL and the minimum acceptable signal level. Figure 1 shows how three basic elements, namely the microphone, the studio and the analog audio mixer, each contribute to a reduced dynamic range in a studio. This is based on several assumptions:

- The microphone source resistance is 150Ω.
- The microphone sensitivity is -80dBV @ 74dB SPL.
- The recording studio ambient noise is 30dB SPL.
- The peak SPL is 120dB.
- The studio operates in a voltage-matching mode.
- The SOL is +8dBu.
- The audio mixer MOL @ 1% THD is +18dBu.
- The audio mixer SNR is 80dB with respect to MOL.
- The audio mixer is set up such that an SPL of 120dB produces MOL at the output.

These assumptions reflect the expected single-pass performance of typical equipment available on the market. These are ideal operating conditions, but in actual practice, the results may be different and possibly worse.


Given SPL peaks of +120dB, an ambient acoustical studio noise level of 0dB SPL and a standard dynamic micro-

FRAME GRAB

A look at tomorrow's technology.

DSP: Engines for the digital revolution

The typical consumer uses a DSP-based product every 10 minutes.
Worldwide use of DSPs by 2002.

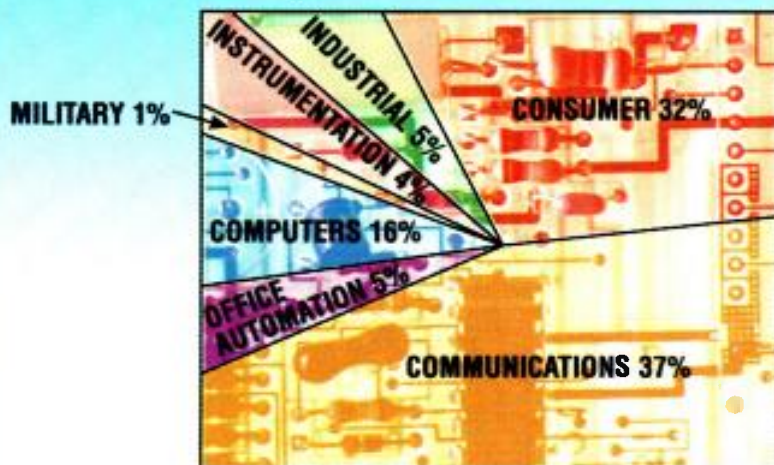

phone as defined above, the theoretical dynamic range at the microphone output is 59dB, limited mostly by the thermal noise of its resistive component.

The ambient noise in a broadcast studio is on the order of 30dB SPL. This limits the dynamic range of the studio to 50dB. Unlike the random noise generated by the resistive component of the microphone, the studio acoustical ambient noise has mostly low-frequency spectral noise components.

The top-of-the-line analog audio mixers have an SNR on the order of 80dB with respect to the reference MOL. If the mixer is adjusted such that SPL peaks of 120dB generate output level peaks (MOL) of +18dBu (10dB above an SOL of +8dBu) at 1% THD with an SNR of 80dB, the mixer background noise level is -62dBu as measured at its output. This limits the dynamic range of the audio mixer to 40dB.

To avoid mixer input and output overloading at high SPL levels and a reduced SNR at low SPL levels, the operator "rides the gain," manually adjusting

input signal levels, channel gains and the master faders to achieve optimum operating conditions. Some mixing audio consoles with a large number of microphone inputs feature individual input channel compressors to ease the operator's task.

Audio recorder dynamic range

Figure 2 shows a comparison between the performance of a typical analog audio tape recorder and a 20-bit digital audio tape recorder.

Analog ATRs: The MOL of analog audio tape recorders is the output level at which the total harmonic distortion (THD) caused by the recording/playback process is between 1% and 3%, depending on the class of the equipment. The MOL of a typical analog audio tape recorder is usually 6dB above the SOL at low and medium frequencies (<1,000Hz). Inevitably, especially when the signal-level monitoring at the output of the audio mixing console is carried out using VU meters, the audio tape recorder may be fed signals with


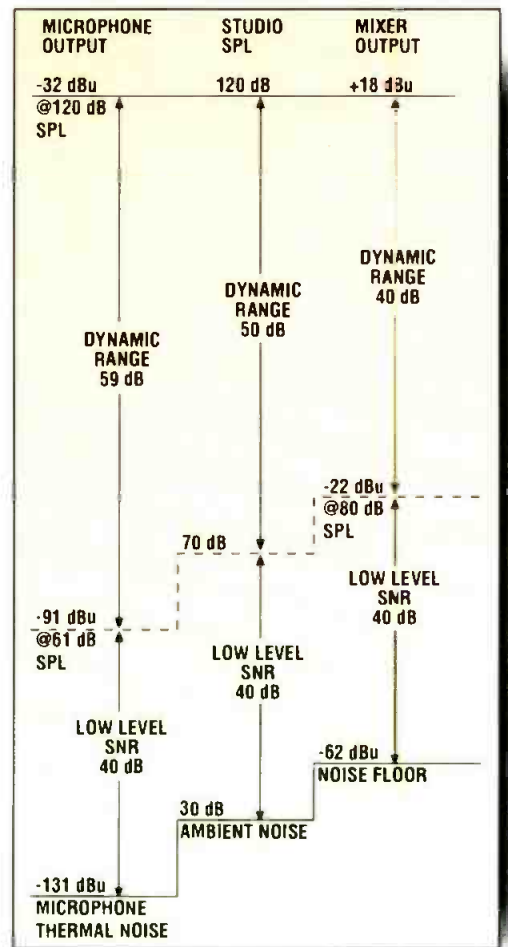


Figure 1. The factors shown above contribute to the dynamic range within a studio environment.



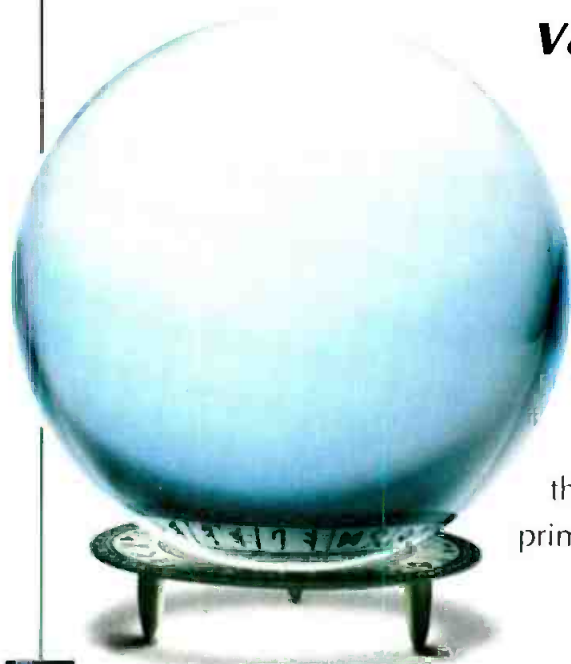

Q. How can I make sure programs being made now will have the best production values in the DTV era?

A. Originate in a format that will give you the most data - either 35mm film or one of the HD video formats if your budget allows. 1080i offers the best spatio-temporal capture parameters of all video formats. You can derive all of the ATSC transmission formats from it. And in the future it will give you the best quality conversions to HD progressive. The faster field rate of video makes it more suitable for sports than 24 frame film which is often preferred for prime-time dramas.



peaks exceeding 10dB above SOL. The situation is worsened by the use of high-frequency pre-emphasis in the recording amplifier to compensate for tape losses. This can lead to tape overload in the presence of high-level, high-frequency spectral components in the audio signal. The amount of high-frequency pre-emphasis depends on the class of the equipment and the tape speed. The SNR with reference to the MOL is typically between 40dB and 60dB, depending on the class of the equipment. This results in a reduction of the dynamic range to 20dB.

There are few and conflicting choices to correct the dynamic range problem of the analog audio tape recorder, including:

- Using a Dolby-type dynamic noise reducer.
- Accepting a reduced SNR at low signal levels.

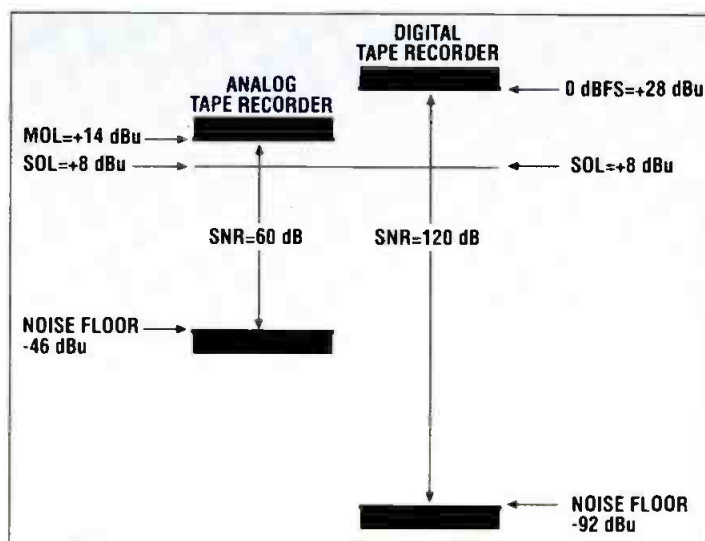


Figure 2. Comparison of the various levels associated with analog and digital tape recorders.

- Accepting a certain amount of clipping of short high-level audio-signal peaks.
- Using premium grade audio tape.

The ultimate improvement is obtained by replacing the analog audio tape recorder with a digital audio tape recorder.

Digital ATRs: The maximum audio signal level accepted by digital audio tape recorders before clipping is the large-

est digital code the A/D converter can offer. This level is called 0dBFS (decibels full scale), and all digital levels are referenced to it and assume negative values. The noise floor, a consequence of quantizing errors, is the quantizing noise that is on the order of -120dBFS for a 20-bit A/D converter. The resulting signal to quantizing noise ratio is 120dB. Quantizing noise occurs only in the presence of an analog audio signal and can best be described as "noise behind the signal." At low

analog input signal levels, the quantizing errors result in signal distortions, which explains the choice of 20 bits for high-quality signal processing. In the absence of an analog audio signal at the input of the A/D converter, no audible noise exists.

The maximum signal level (MSL) is the analog RMS voltage corresponding to 0dBFS for a particular system or device.




SNELL & WILCOX



Q. My budget doesn't allow an HD video format. Can I squeeze good quality upconversions from Betacam SP or DV?

A. They can be better than you might expect! Betacam SP is analog, but its advantage is that, like DV, it is component, so it doesn't suffer from composite encoding and decoding artifacts. It also has quite a reasonable bandwidth and low noise. The main thing is to shoot well on a good quality camera. Component makes a far better job than composite of reproducing the image the camera saw – enabling the upconverter to do the best job.

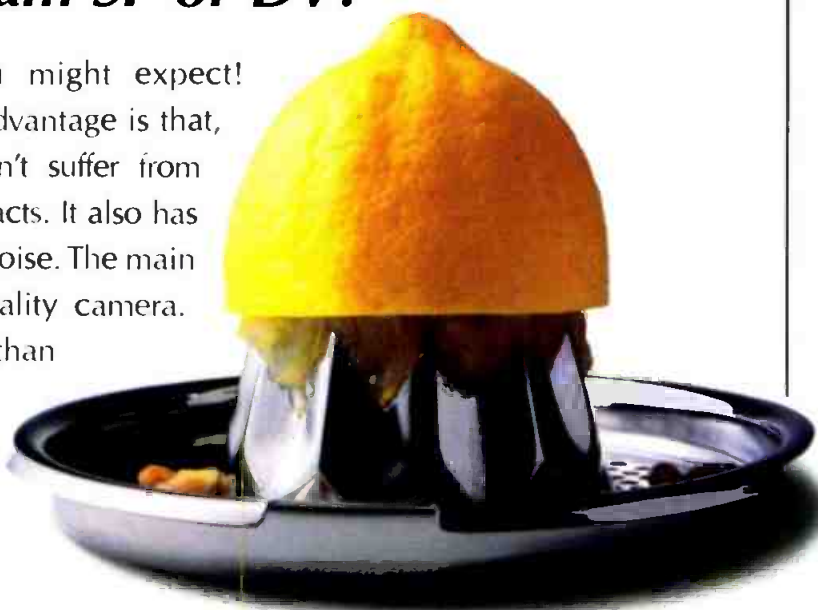



SNELL & WILCOX



FREE SURVIVAL COURSES FOR YOUR DIGITAL FUTURE



For your free copies of these DTV Guides contact 408 260 2800. E-mail: info@snellusa.com. WWW: snellwilcox.com



Circle (19) on Free Info Card

www.americanradiohistory.com

The SOL is the analog steady-state RMS voltage that deflects the VU or PPM meter to reference level. SOL is expressed in dBm or dBu. Manufacturers have chosen -20dBFS as the SOL (equal to +8dBu or 0VU), which results in 20dB of headroom. This ensures that digital audio tape recorders will accommodate peaks extending 20dB above the average. The resulting dynamic range, assuming a low-level SNR of 40dB, is on the order of 80dB.

In analog audio environments that use VU meters for audio signal level monitoring, digital audio tape recorders may be fed with occasional peaks exceeding +10VU. The 20dB headroom of the digital audio tape recorder ensures that under practical circumstances there will be no signal clipping. The overall dynamic range is then determined by the audio console.

In analog audio environments that use a PPM for audio signal level monitoring, audio signal level peaks will normally not exceed 3dB above SOL. Some organizations using PPMs tend to restrict the

SPL (dB)	MICROPHONE OUTPUT VOLTAGE (μV)	SNR (dB)
120	20,000.00	99.21
74	100.00	53.19
61	22.40	40.19
34	1.00	13.19

Table 1. Open load SNR at dynamic microphone output based on SPL.

digital audio tape recorder headroom to less than the 20dB reserved by the manufacturer in an effort to further increase the SNR. Encountered headroom values may vary between 12dB and 18dB. Under these circumstances, there is a high probability that occasional audio peaks will reach 0dBFS. With reduced dynamic range audio signals, the average audio signal energy will hover around 0dBFS. This could create some problems when digital audio tape recorders are used to feed analog audio equipment. The 0dBFS peaks result in +28dBu analog signal audio peaks that will overload conventional analog audio equipment.

Using digital audio tape recorders in an analog audio environment offers a quasi-transparent recording medium. A few ground rules will ensure a smooth integration into an analog environment:

- The 120dB SNR typical of 20-bit dig-


ital audio equipment results in considerable dynamic range. However, reducing the 20dB overhead results in only a marginal benefit and should be avoided.

- Changing from VU meters to PPMs is recommended.

- If the superior dynamic range of the digital audio tape recorder exceeds the capabilities of the analog signal distribution medium, use soft compressors at the interconnect point.

Michael Robin, former engineer with the Canadian Broadcasting Corporation engineering headquarters, is an independent broadcast consultant located in Montreal, Canada. He is the co-author of Digital Television Fundamentals published by McGraw-Hill (see below for details on this book).

Michael Robin's book may be ordered directly from the publisher by calling 800-262-4729. It is also available from several booksellers.



Broadcast is your career now, but it's always been your life.

Watching TV as a kid, you wondered how your favorite shows came from that tower on the hill. You felt the power then, and so did we. For over 60 years, broadcasters have relied on us for the power behind their pictures. Broadcast is your life. Make it last. **THE EIMAC K2 DIGITAL IOT.**



A Division of
Communications
& Power Industries

301 Industrial Road
San Carlos, CA 94070

tel 650.592.1221

fax 650.592.9988


email iot@eimac.cpli.com

www.eimac.com



ISO 9001 Certified • Made In USA

Circle (20) on Free Info Card

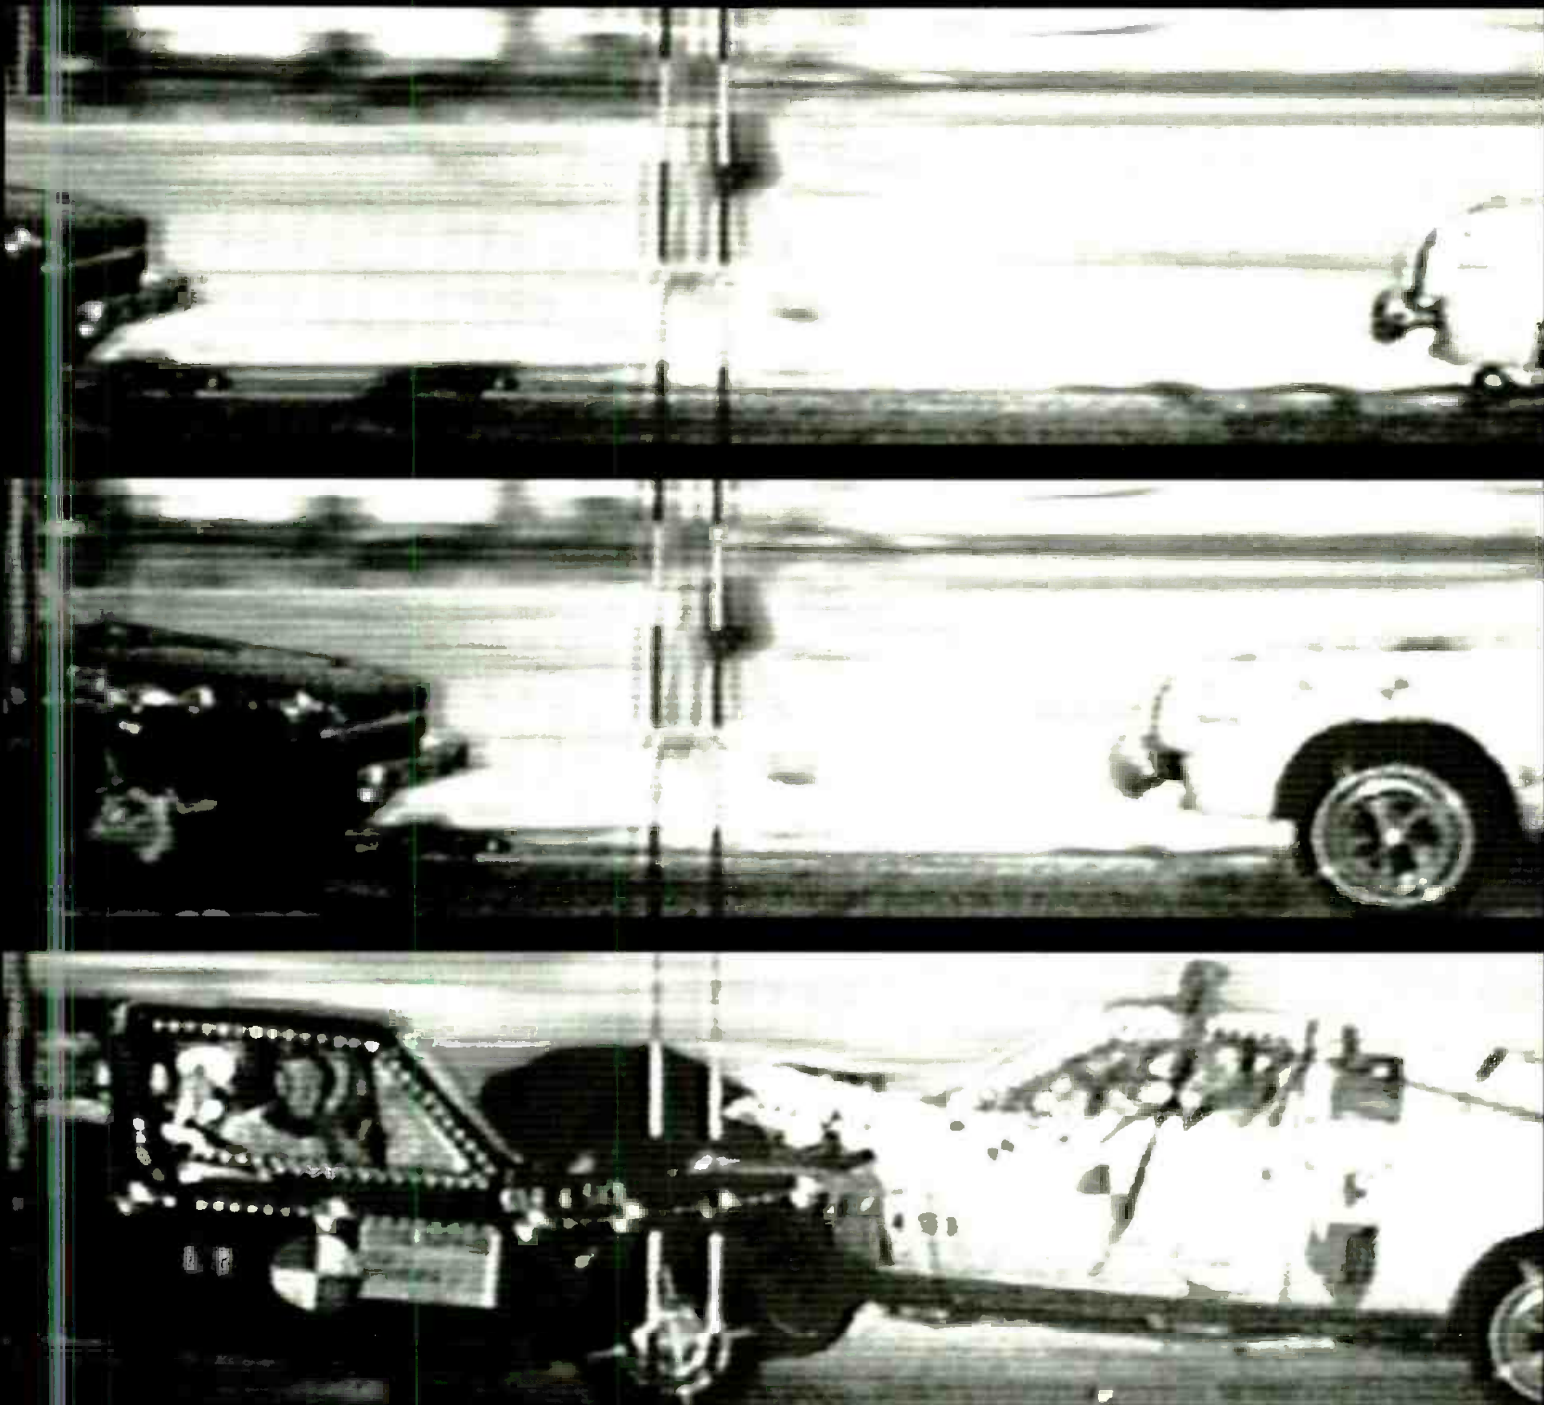

OK LET'S TALK CONVERGENCE.

>> YOU'VE SEEN IT COMING FROM A DISTANCE — MAYBE EVEN TRIED TO AVOID IT, BUT THE WHOLE WORLD IS ABOUT TO CHANGE — ENTIRE INDUSTRIES REDIRECTED. AT LOUTH, WE CAN HELP YOU GAIN CONTROL. MULTI-CHANNEL DIGITAL BROADCASTING. GLOBAL NETWORKING. REALIZING NEW MARKET POTENTIAL — THIS IS WHAT WE DO. VISIT US AT WWW.LOUTH.COM FOR INFORMATION. IT'S TIME. AND YOU CAN CHOOSE THE RIGHT WAY TO MAKE AN IMPACT.

LOUTH
AUTOMATION

BROADCAST confidence



12,003 THINGS TO
THINK ABOUT WHEN
LOOKING FOR A
VIDEO SERVER.

The first 12,000 are the number of Tektronix® Profile server channels already installed – four times the installations of any other server.

Number 12,001 is the Profile's ability to function as a workhorse server across a wide range of applications. Number 12,002 is our professional-quality PDR300 MPEG2 4:2:2 format. And number 12,003 is the leadership and experience Tektronix brings in delivering turnkey systems that move broadcasting technology forward.

For even more to think about, call 1-800-TEK-VIDEO, dept. 713 or visit www.tek.com/Profile/12,003



Tektronix®

avoiding downloading of files containing viruses, securing e-mail from prying eyes, preventing the use of your e-mail server for illicit purposes and even eliminating the threat of someone gaining access to your desktop or file server. Interestingly enough, the Internet is also an excellent source of information on security concerns.

At a minimum, install a firewall system between your network and your Internet provider. Believe it or not, with-

out firewall protection, if you have a direct connection to the Internet and are using Windows 95 that is "file-sharing" enabled, people on the Internet can browse your hard disk at will.

Firewall systems are specialized computers that act as gatekeepers. They keep unauthorized people who are on the Internet from accessing information on your local network. They allow authorized communications with the Internet, and some models look for suspi-


cious activity that could indicate that someone is trying to "crack" the firewall.

If you have an internal e-mail server and are connected to the Internet, be on the look-out for potential problems. One recent technique has been to "bounce" spam (unsolicited e-mail) off poorly protected e-mail servers. In this rather creative activity, someone sends a large number of e-mail messages to your server and redirects them to their intended recipients. Through some clever manipulation of the e-mail headers, it appears that the spam came from your site. Then, not only are you deluged by the e-mail from the spammer, but when the e-mail is particularly obnoxious, you can be swamped by numerous e-mails from people expressing their displeasure at receiving the spam. To avoid this sort of security breach, install anti-spam software on your e-mail server. Several programs are available, and they fix a number of e-mail security loopholes. Contact your e-mail vendor for suggestions. ■

Brad Gilmer is president of Gilmer and Associates Inc., a technology and management consulting firm.

G A S I N J E C T E D F O A M

High Speed Digital Performance

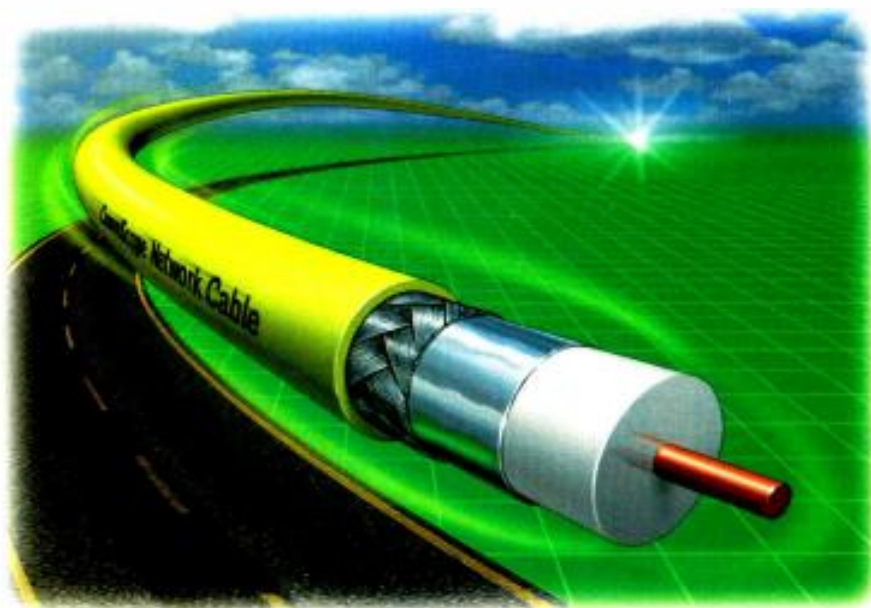

*CommScope's Serial Digital Video Cables –
From The Innovators In Gas Injected Foam Technology.*

The key to Serial Digital Video Cable technology is nothing new to CommScope. CommScope originated it over 20 years ago. Other companies imply they are the creators. Only CommScope gives you Serial Digital Video Cables backed by decades of gas injected foam technology innovations. Specially designed to handle the high data speeds of Serial Digital Video

distribution at 270 or 360 Mb/s, CommScope 5765 cable delivers superior digital transmission characteristics. For even more advantages of these "experienced cables," contact CommScope today. And discover cable technology so advanced, it'll be around through the next millennium.



CommScope

For information call 1-800-982-1708 or 828-324-2200.

Circle (33) on Free Info Card

Password guidelines

- ① Write down your password, but then be sure to keep it in a safe place. (Under the mouse pad is not generally considered a safe place.)
- ② Change your password about every six months.
- ③ Use punctuation in your passwords. A password such as "six;pack" is much harder to break.
- ④ Use different passwords for different purposes. For example, your power-on password and network log-on password should be different.
- ⑤ Do not use family first names for passwords.



You don't work
a five-day week.
You work a
120-hour-day.

Deadlines. Dramatic stories. Endless pressure. One day can lead right into the next when you deliver the news. At Quantegy, we realize that it's not just the story you're sending out with every broadcast. It's your reputation. That's why each Quantegy tape offers superior video performance, providing higher levels of

chroma and color as well as greatly enhanced clarity and definition. Ultimately, all our attention to detail

is designed to help keep you working smoothly. Which is a whole lot more than we can say for the coffee.



Call 1.800.752.0732

Fax 1.800.628.0535

www.quantegy.com

MORE than MEETS the EYE.

Circle (34) on Free Info Card
www.americanradiohistory.com



Component level repair in a black box world

BY STEVE EPSTEIN

Believe it or not, I am still getting requests for the 7788 modification for those old Tek 529 scopes (see "Ask Dr. Digital," Feb. 1998, p. 58). And, while researching a reader question, I found the following letter in the May 1982 issue of *Broadcast Engineering*:

RWith reference to the article "Transistors Solve Tube Problems for the 529" on page 74 of the December 1978 issue of *Broadcast Engineering*, I have determined that changing the value of the newly added zener base bias diode from 27V to 12V (1N4742) allows Q₁₆₄ and Q₂₆₄ to operate nearer the V_{ce} and dissipation of the original tube design. This prevents thermal runaway and latch-up conditions from occurring to the output stages, while preserving the original dynamic range and linearity of the display.

Also with reference to RM 529 scopes from serial number 10670 and up, the modification in the original article will not work properly without additional work, because the operating points of the entire vertical amplifier have been changed from those indicated on the schematics. Symptoms include trace compression and lack of dynamic range at the top and bottom of the display.

For those who wish to take a chance, the original modification can be made to work by carefully altering the value of R₁₂₃ to reprogram the current source Q₁₂₄, so that the feedback pairs Q₁₄₄-Q₁₅₄ and Q₂₄₄-Q₂₅₄ are operating in the center of their dynamic range, with the vertical position knob in the center of its range and the DC balance set for equal DC voltages at Q₁₅₄ and Q₂₅₄ collectors. The existing R₁₂₃ is usually paralleled with a selected resistor to do this.

Edgar Lee Howard
Supervisor, Special Projects
WOSU-TV, Columbus, OH

Well there you have it, if you made the

modifications to those 529s, and they didn't work quite the way you expected, maybe Edgar has the answer.

Moving to something a little more modern, I have received quite a few requests for that switcher software (see "Ask Dr. Digital," March 1998, p. 58). One of the most recent letters follows:



Received your software. We've tried to use it with our GVG110 and GVG200 switchers, but it doesn't work. I suppose the protocols are different. At any rate, I'm very grateful.

Kepa Murua



Yes, probably a difference in protocols. Nevertheless, I am checking with Tektronix (Grass Valley) to obtain the instruction set for the 110/200 series switchers. If I can get it, I will modify the program to work with the 100/200 series as well. If anyone is interested in a version for the 100/200s, let me know.

This is customer service

Now, on to one of my favorite subjects — customer service. Recently, I tried to connect with my ISP from my home computer. The warning message on the screen said "no dialtone." The night before, we had an intense lightning storm, and after a few checks, it became apparent that the telephone/modem ports in my surge protector had been blown. This particular surge protector was made by Kensington and is about four years old, but is still under warranty. When I called the company, the friendly woman who answered said a new unit was on the way and I received it in two days — no hassles, no problem. She even said that I didn't need to return the defec-

tive unit. Now that's customer service!

By the way, after the new one arrived, I opened up the old one and found a pair of blown inline fuses mounted on the telco board. Once they were replaced, the old unit worked fine.

Component level repair

While we're on the subject, I'd like to address the value of component level repair, which seems to be a dying art. It's no wonder; with most of today's equipment, it is cheaper to replace the equipment rather than to repair it. Many times, I have spent an hour repairing something that I could have replaced for a few dollars. Although at the time, it may not have been cost-effective, practicing my repair skills has paid off many times. For example, last week I was upgrading an old 486, and while removing the CPU, I managed to pop a 22µf surface-mount capacitor off the motherboard. As it turned out, one of the mounting pads had separated from the motherboard, leaving only a small trace and feed-through hole about the size of an "i." It took about 15 minutes to get the motherboard out, heat up the soldering iron and execute the repair, but in the end, it worked. So far, every computer technician that I've talked to has had the same response — "replace the motherboard." They may be technical, but electronics is apparently beyond their area of expertise.

Whether it is modifying old scopes or repairing motherboards, component level repair can save you and your facility a tremendous amount of money — even today. Broadcast engineers are among the few still practicing this craft. If there is any way I can be of assistance, whether it's yesterday's analog equipment or today's digital, let me know. Send me an e-mail at drdigital@compuserve.com. ■

THE MORE HYPE THERE IS IN BROADCASTING,
THE LESS LIKELY ANYONE IS TO BELIEVE IT.

There have been plenty of wild claims flying around out there about digital video. So when we introduced a video disk recorder with integrated RAID for about the price of a broadcast digital VTR, well, let's just say people found it hard to swallow.

The Hewlett-Packard MediaStream Disk Recorder is the newest member of our MediaStream family. It works perfectly well on its own, or in concert with our MediaStream Broadcast Server. And like all our products, it has plenty of room to grow.

You can start with just two channels, or as many as five. It stores up to 18 hours of broadcast-quality programming, and it even supports fiber channel networking. And all you need to get started is just \$65,000* and a little space in a standard rack.

The HP MediaStream Disk Recorder can make the leap to digital a lot less of a leap. For more information, call 1-800-452-4844,* Ext. 5506.

We'll show you digital video you can believe in.



The \$65,000 HP MediaStream
Disk Recorder: Digital
video comes down to earth.*

*U.S. list price
©1997 Hewlett-Packard Co. TMVID708/BE



Circle (21) on Free Info Card

www.americanradiohistory.com

Transmitter maintenance

BY DON MARKLEY

Far too many years ago, this author started work at a full-time AM radio station in a market that barely fell within the top 100. As the new kid on staff, the assigned hours were between midnight and 8 a.m., with Tuesday and Wednesday off; a truly great shift. On the other hand, it worked well for a student and included sole or shared participation in transmitter maintenance.

The transmitter was a 5kW Westinghouse, originally installed in 1948, but it looked as though it had just been delivered. Once each month, it was washed internally with soap and water. Periodically, the outside was paste waxed. It had about 1,000 meters that allowed for the monitoring of all the voltages. They were religiously maintained at their proper values and faithfully logged. All reasonable spare parts were carefully inventoried and stored. In those days, the high-voltage rectifiers were mercury-

vapor types. New tubes had to be operated with only filament voltage for several hours to remove the mercury from the elements before high voltage could be applied. That was done in a spare socket, and the tubes were stored upright until needed.

A ledger was maintained in the operator's console. *Everything* that had been done to the transmitter since it was installed could be found in that ledger. Whenever a failure occurred, all symptoms were detailed along with the pertinent meter readings and the necessary repairs. When someone new was hired, the first requirement was to read the transmitter's instruction book. The second was to read the ledger carefully. The immediate result of this was that everyone at the transmitter was familiar not only with its theoretical workings but also with every problem that had ever occurred. The final result was that when

the transmitter did have a problem, repairs were accomplished very quickly. Unscheduled downtime for the transmitter averaged less than two hours per year. That was for an all-tube transmitter. Let's face it, that kind of reliability is highly acceptable even for modern solid-state equipment.

It should be pointed out that the antenna tuning units were also kept clean and in good mechanical condition. The radials were all resoldered every four or five years. Nothing was allowed to grow within 20 feet of the towers. Everything was mowed, painted regularly and cleaned, resulting in a reliable and stable station.

That was then, this is now

Now, the situation has obviously changed. For one thing, there is no row of 8008s lined up at the transmitter waiting to be installed. Except for a few stations in the largest markets, there is no full-time staff at the transmitter. Most radio stations are lucky if there is one full-time technician with less than three stations to maintain.

However, it is still possible to find a well-maintained station here and there. One example is WBOC-TV in Salisbury, MD. Although the station is not manned on a full-time basis, one technician is assigned as the transmitter supervisor. It is his responsibility to see that everything at the transmitter site is properly maintained and adjusted. The old RCA transmitter was operating as though it was new. Every pilot light in every push button worked. Even those weird little meter relays all worked perfectly. The newest klystron in the place had more than 80,000 hours on it, yet the transmitter performance was perfect. The transmitter wasn't the only piece of equipment that functioned in this manner. Although much of the test equipment was old, it all worked as if new. This was




FRAME GRAB

A look at the consumer side of DTV.

Projection TVs will be the early choice

Early HD adopters will buy HD and widescreen projection, not CRT, TV sets. Even 4:3 projection sets will see growth as consumers move into DTV.

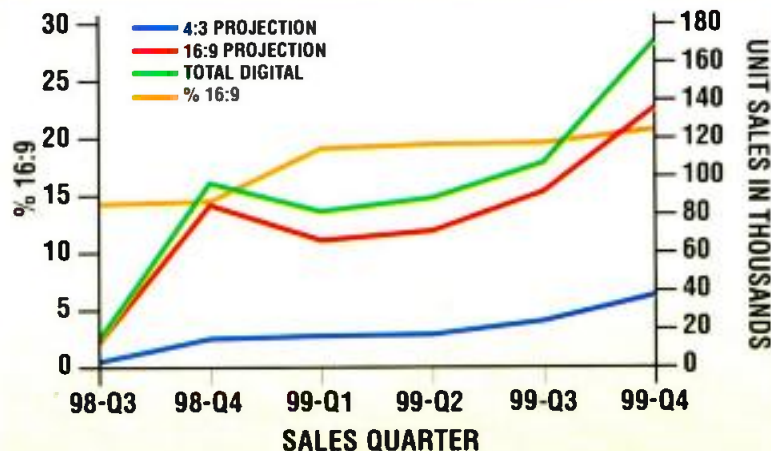

Source: instat.com

The

Simply
Smarter

imaging Series

Digital Video & Audio Interfaces

"The installation of a new all-digital production switcher into an all-analog broadcast facility created a big challenge. The Miranda imaging Series of conversion products have exceeded our expectations with the flexibility and stability that we needed in our transition to digital."

Bob Sink, Engineering Maintenance Supervisor
UPN44 WTOG, St. Petersburg, Florida

Miranda

Miranda Technologies inc.
Tel. 514.333.1772
Fax. 514.333.9828
1-800-224-7882
www.miranda.com

The imaging Series Modular Digital Video And Audio Interfaces

Space age tools at an earthly price/performance ratio. The imaging Series offers a wide range of modular, thoroughly engineered interfaces for a systems solution that grows with your digital facility. Your choice for high quality, ease of use and reliability.

- ✓ 4:2:2/NTSC/PAL encoders and decoders
- ✓ 4:2:2/CAV D to As and A to Ds
- ✓ Audio D to As and A to Ds
- ✓ 4:2:2 & 4fsc Converters
- ✓ Logo Generators
- ✓ Ancillary Data Processors
- ✓ 4:2:2 Ethernet MUX/DEMUXs
- ✓ Digital Video & Audio DAs
- ✓ Frame Synchronizers

Ask about our ICP-S remote control software!

and New!

Symphonie

Housing Frame

- ✓ 4RU frame fits up to 16 imaging Series video and audio modules
- ✓ Full power redundancy with second power supply
- ✓ Built-in serial port for remote control
- ✓ Hot-swappable boards and power supplies



simply the result of continuing, careful maintenance. By the way, the place was spotless.

The lesson to be learned is simple; if the goal is a stable, reliable station operating right up to the capability of the equipment, provide plenty of tender, loving care. For every piece of gear, operating parameters have been determined by the equipment's designers for proper performance. When these parameters are allowed to vary from the desired values, system performance falls off. Every part in the transmitting system is there for a specific reason. Therefore, every part should be kept in place, adjusted properly and, most important, known to the technician responsible for the system.

Proper care and feeding

Critical to the operation of any electronic system, especially high-power equipment, is cleanliness. Accumulations of dust and dirt reduce component cooling, increasing the failure rate and decreasing the system performance. Ultimately, dirt accumulations will lead to premature system failure. If you don't

keep the equipment clean and properly adjusted, it will go to that great porcelain convenience in the sky sooner than necessary. This could lead to the swift departure of those responsible for the servicing of such systems.

The solution is quite simple. The responsible technicians should learn about each piece of equipment in the system thoroughly. That means, at a minimum, carefully studying the instruction books. If training is available, hound the administration until those responsible are allowed to attend the factory school on major items. Then, get the place clean and operating properly. This usually requires significant hump busting when taking over a poorly maintained system. After that, the job really becomes simple. Maintain adequate air flows in all cooling systems and change filters religiously. Once everything is properly adjusted, do the little touch-ups that will keep it that way. Actually, less work is required to maintain the systems in this way than if you let them go to pot and then have to repair them.

You *absolutely must* convince the

management and programming gurus to allow *regular* scheduled shutdowns of the equipment. Pick one night a month, midnight or so until five or six in the morning, to go through the system. In the interests of safety, have someone there to help. During that period, it is possible to do the necessary cleaning and adjustments to put the system right again.

You are faced with two simple choices. Either plan for scheduled shutdown and maintenance *or* experience unplanned shutdowns, probably at the most inconvenient times. Of course the transmitter will still have an occasional failure that takes you off the air. But, if you maintain it properly, those failures will be at a minimum. The current mode of programmers seems to be to stay on the air at all times. That is a totally unreasonable approach to the technical side of the station. If no interruptions at all are desired, the station must have a standby transmitter and antenna to allow everything to be properly maintained. ■

Don Markley is president of D. L. Markley and Associates, Peoria, IL.

Production Clips

Fundamentals of grounding

BY KEITH SWITZER

Proper grounding of any building or studio is essential not only to protect the people who work there, but to also protect the facility and equipment.

Essentially, the goal of any grounding system is to provide a low-impedance path for fault currents until they reach the earth. Therefore, grounding systems

must offer protection from both electrical system faults and lightning. They must be designed to handle the highest anticipated fault current and, most important, to ensure that surge protection equipment operates as designed.

Ground resistance

Many factors are important in determining the overall effectiveness of a grounding system. The resistance of the earth itself (earth resis-

tivity) can significantly impact the overall impedance of the system. Several factors, such as moisture content, mineral content, soil types and soil contaminants, determine the overall resistivity of the earth. In general, the higher the soil moisture content, the lower the soil's resistivity. If your soil has high impedance, you can use any of several products to help reduce earth resistivity and maintain a low system impedance.

A megger is used to measure ground resistance. It uses a voltage source and an ohmmeter to directly measure the earth's resistance. Ground resistance should be measured whenever a ground system is first installed. The NEC, Section 250-84 requires that a single electrode consisting of a rod, pipe or plate with a resistance to ground of 25Ω or more be augmented by one additional electrode of the type listed in Section


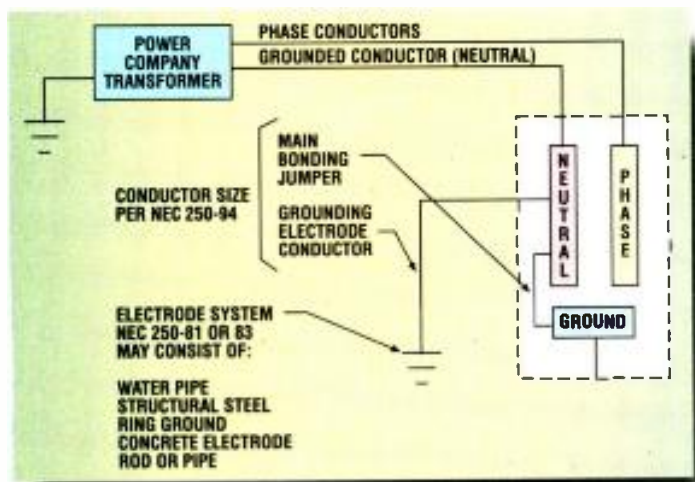


Figure 1. A building's ground is carried from the system's electrode ground through the breaker panel's neutral to the power outlet. This provides the fault safety needed to protect personnel.

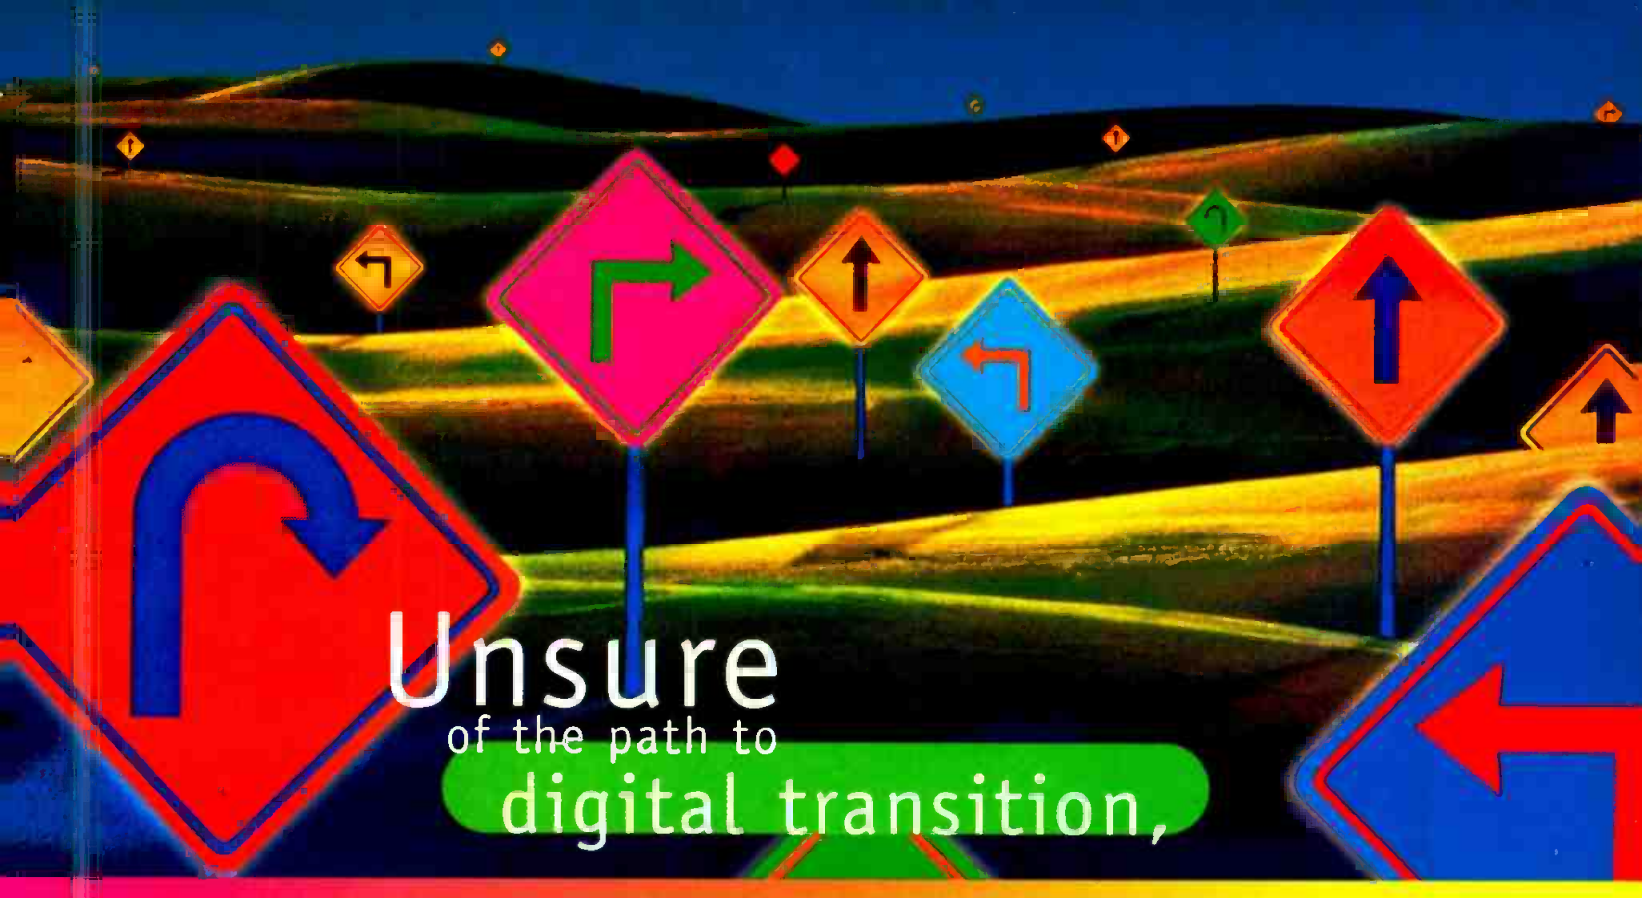

Unsure of the path to digital transition,

we'll take you there.

While digital technology is the mandated future of the television industry, the path to digital transition is a confusing journey for many broadcasters.

Professional Communications Systems brings the expertise and experience necessary for planning and managing the many tasks involved in the digital transition process. We design this process for *your* station, in *your* market, addressing *your* specific needs.

We have the resources; financial, technical and human. We have the experience, including transitions involving relocation. We have the relationships; architects, contractors, manufacturers. And we have the training systems to get your people up to speed in a hurry.

The deadline is rapidly approaching. If you're unsure of the path to digital transition, let us take you there.

Technology Evolves. We Take You There.SM



PROFESSIONAL COMMUNICATIONS SYSTEMS
A DIVISION OF MEDIA GENERAL, INC.

5426 Beaumont Center Blvd.
Tampa, FL 33634 • (800) 447-4714
www.pcomsys.com

Circle (24) on Free Info Card

250-81 or 250-83. If you need more soil contact, extra electrodes can be used. These electrodes should always be installed so that they are at least six feet apart because spacing less than six feet decreases the rod efficiency. The goal when deciding how many and where to locate ground rods is to ensure that the maximum amount of fault current can be safely discharged into the earth.

Building exterior grounds

The metal columns around the perimeter of a building, when properly grounded, are excellent grounding electrodes and provide a good path into the earth for any fault currents that may develop on the system. A well-designed perimeter grounding system provides an equi-potential ground for all the buildings and equipment located inside.

The system's ground ring conductor size will depend upon the size of the electrical service but is seldom less than 1/0 AWG copper. In some cases,

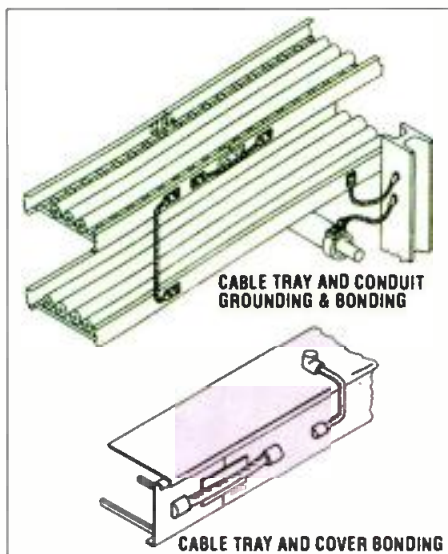


Figure 2. To properly ground metal cable trays, each section must be bonded to the other sections and the entire assembly connected to the building's ground system.

an electrical design may require ground rods in addition to the perimeter ground ring. Because the ground rods can reach deeper into the earth where the soil moisture content may be higher or the soil may not have frozen,

ground rods help minimize the effects of dry or frozen soil on the overall resistance of the perimeter ground system. The ground ring and ground rods should be installed at least 24 inches from the foundation footer and 18 inches outside the roof drip line to allow for the greatest use of the water runoff to maintain good soil moisture content.

Sometimes you'll see *triad* (triangular) ground rod arrangements specified. Triad arrangements are not recommended unless the spacing between the ground rods is equal to or greater than the individual ground rod length. Three rods in a straight line spaced at least equal to the length of the individual ground rods are more efficient and result in a lower overall system resistance.

Interior grounding

Most electrical equipment must have a grounding conductor as dictated by the NEC. This is usually handled by the ground connection on the device's plug. Equipment that incorporates a double insulation system does not need a grounding conductor. This includes small tools such as most drills, saws and other appliances. However, in some cases, additional grounding is sometimes needed. If so, ground plates provide convenient accessible grounding points throughout the building.

Section 250-42 of the NEC establishes six general conditions where certain noncurrent-carrying metal parts of fixed equipment must be grounded:

- Whenever such metal parts are located within eight feet vertically and five feet horizontally of ground or any grounded objects a person may touch.
- Whenever exposed metal parts are located in wet or damp locations.
- Whenever metal parts are in electrical contact with metal.
- When metal parts are in high-risk locations.
- When supplied by metal-clad, metal-sheathed metal raceways (see Figure 1).
- Whenever any other wiring method that has provisions for an equipment grounding conductor is used.
- Where fixed equipment operates at over 150V to ground.

ENG EFP POV MADE EASY

GLOBAL MICROWAVE SYSTEMS, INC.

COMPACT MULTIBAND

MICROWAVE SYSTEM



Global Microwave Systems

Complete Solutions:

- Subminiature Transmitters
- Miniature and Compact Receivers
- RF Power and Low Noise Amplifiers
- Antennas
- Helicopter Systems
- GPS Tracking

TEL 760.631.8021

FAX 760.631.8031

www.gmsinc.com

gms@gmsinc.com


Lightweight Rugged 2/7/13 GHz

- ◆ Frequency agile, push button or RS-232 control
- ◆ Dual Audio
- ◆ Replaces 3 radios at a fraction of their cost

This device has not been authorized as required by the rules of the Federal Communications Commission. This device is not, and may not be, offered for sale or lease, or sold or leased, until authorization is obtained.

See us at NAB Booth 13257

Circle (25) on Free Info Card

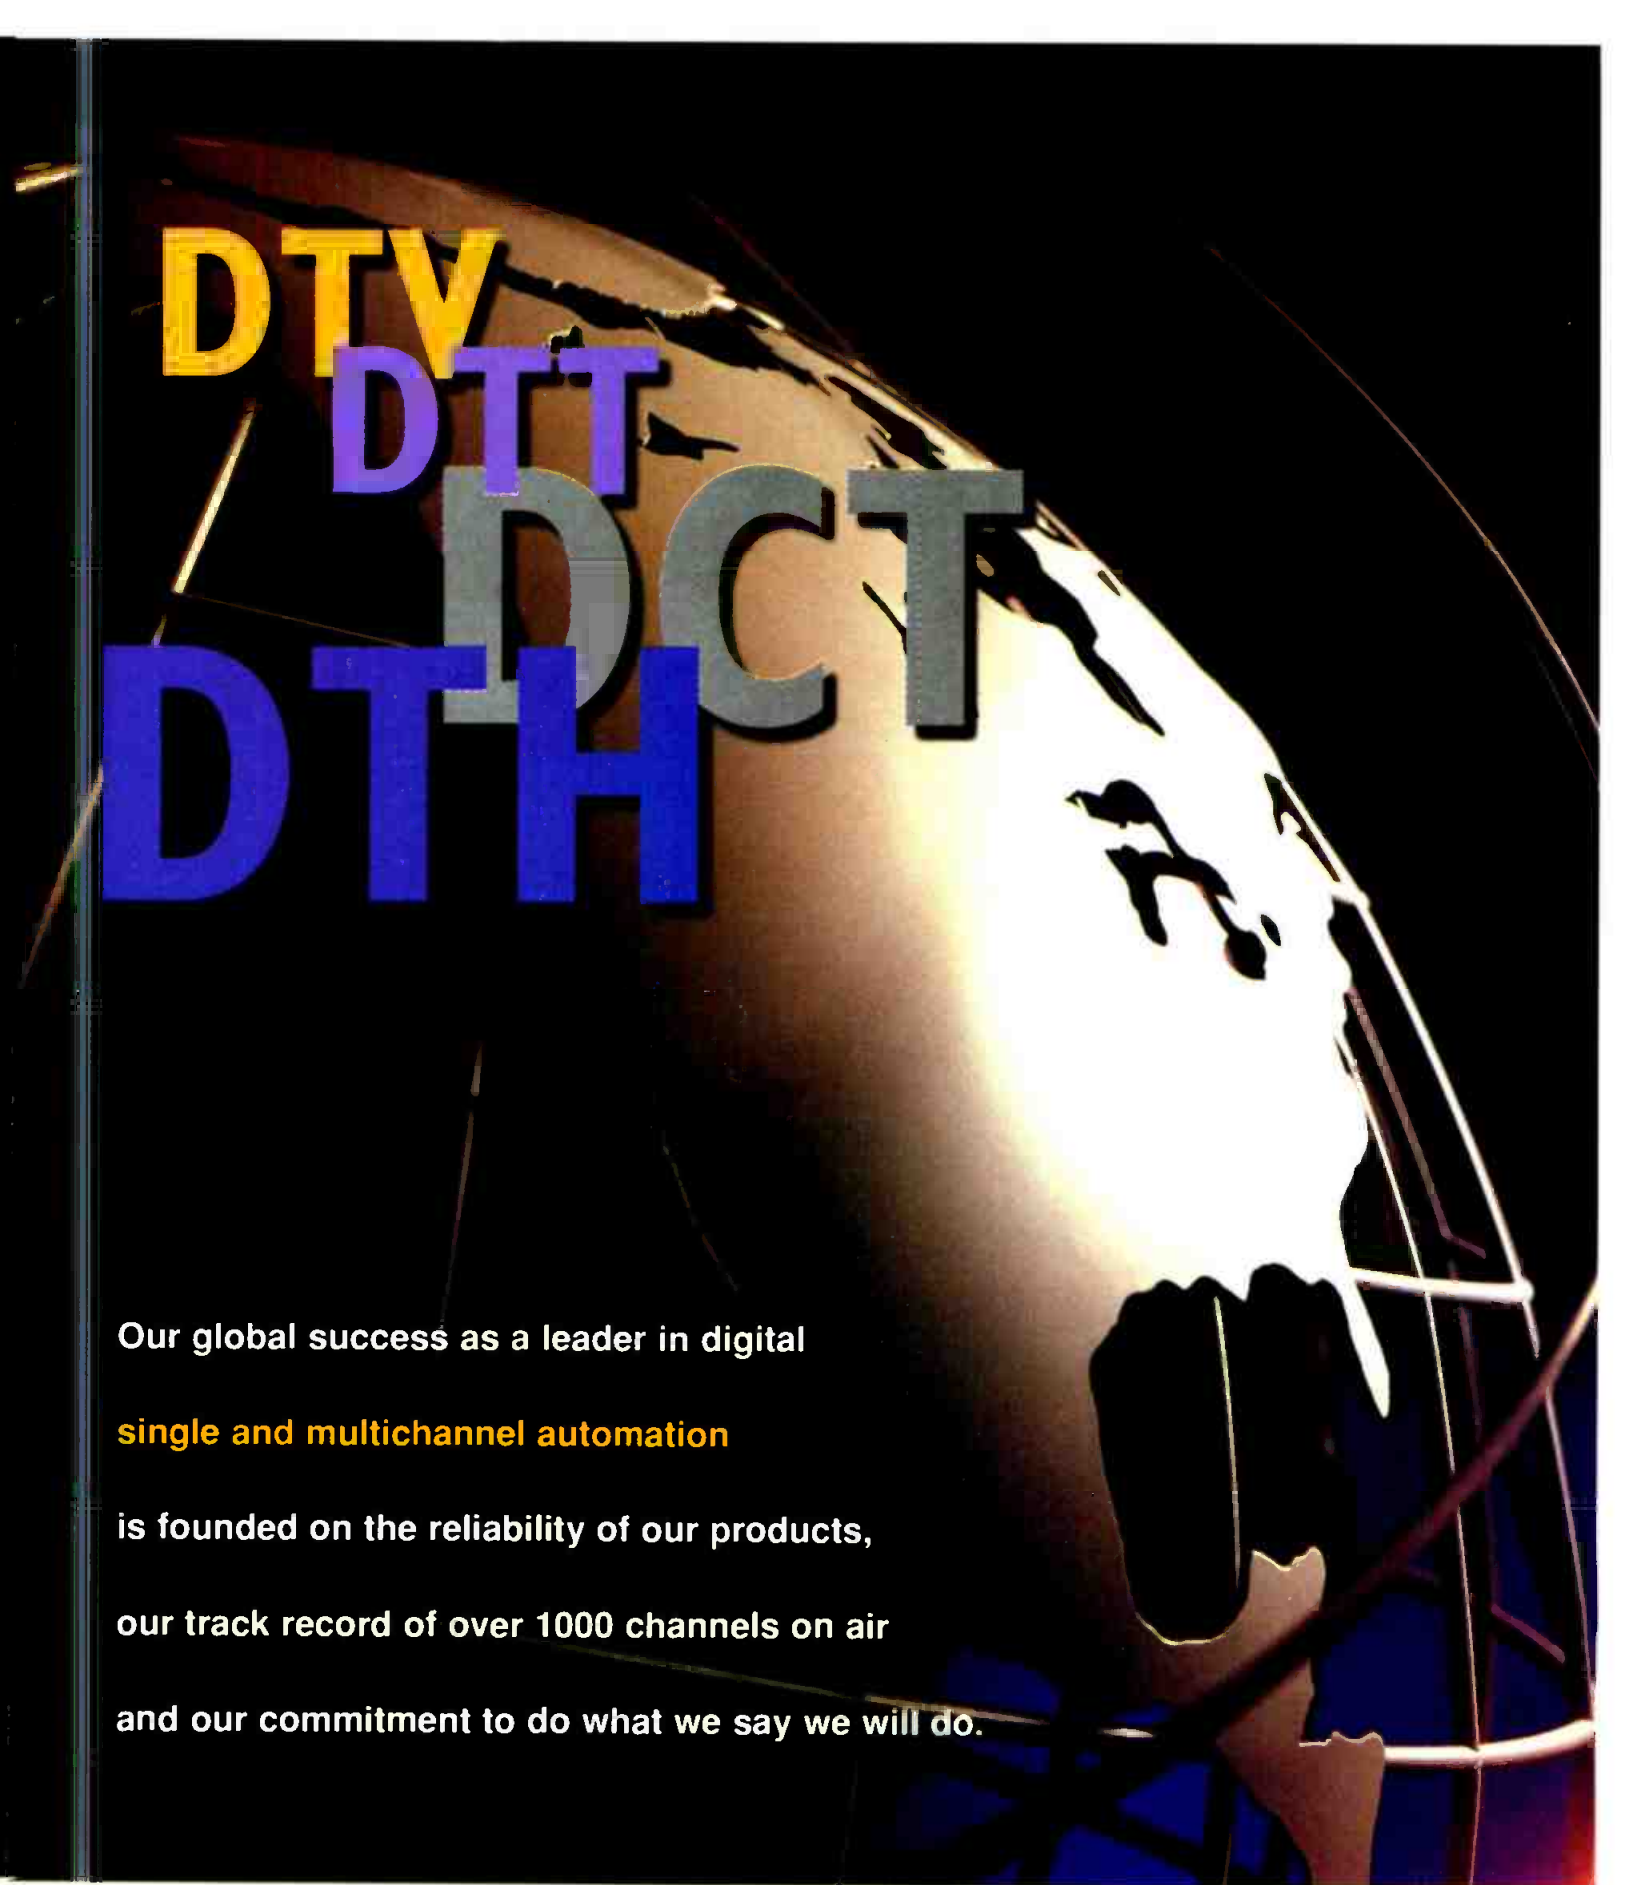

DTV
DTT
DCT
DTH

Our global success as a leader in digital
single and multichannel automation
is founded on the reliability of our products,
our track record of over 1000 channels on air
and our commitment to do what we say we will do.

Worldwide

14 Cedarwood
Chineham Business Park
Chineham
Basingstoke
Hampshire RG24 8WD

Tel. +44 (0)1256 379000
Fax. +44 (0)1256 707359

USA

Suite 250
Airport Park
35 Airport Road
Morristown
NJ 07960

Tel. 973 631 6200 & 1 800 267 8800
Fax. 973 631 6206

www.drake-automation.com

DAL

Drake Automation

Circle (17) on Free Info Card

www.americanradiohistory.com

To grow in broadcasting you need time, money, guts, and Intraplex.



Your new acquisition is finally signed, now you need to operate profitably. Consolidate your program audio, LAN/WAN network, phones, faxes, traffic and billing on one single high quality digital line. The Intraplex STL PLUS gives you integrated two-way transmission over any distance, over any terrain at a fraction of the cost of individual communications links. It's bi-directional, so you can receive audio backhaul at the same time. What's more, you can stay in touch without running up the long distance phone bill. That's why more groups choose Intraplex than any other digital transmission solution. **Call us at 978-692-9000 or visit our web site at www.intraplex.com.**

*The **STL PLUS** T1 System transmits **program audio** for STLs, TSLs and inter-city links, **data** for remote control and LANs, and **voice** for off-premise extensions and intercom.*



Intraplex

Intraplex, Inc.
3 Lyberty Way
Westford, MA 01886
978.692.9000
978.692.2200 fax
<http://www.intraplex.com>

Since the early 1970s, the NEC has required that all receptacles installed on 15 and 20A circuits be of the grounding type. (See Figure 2.) Grounding type receptacles are the "three-pin" devices now common. Although adapters are often used to connect three-pin equipment to two-pin outlets or to "float" chassis, be careful. Not only is that probably not going to meet code, you may be creating a safety issue.

Grounding of sensitive devices follows the same principle as other equipment. However, digital equipment and medical devices often demand special considerations. For more information on grounding broadcast and production equipment (see "AC Power Quality," Feb. 1998, p. 86).

Cable trays

One area that engineers sometimes forget to ground properly is the equipment tray. To meet both national and local electrical codes, equipment trays must be installed correctly, which includes bonding and grounding according to strict guidelines.

An often-forgotten step in the installation process is that of grounding each section of the metal tray. The mechanical splice plates are not an adequate path for fault current. And, in the case of location within AM tower sites, a long piece of cable tray can become a radiator and generate high levels of RF noise.

A continuous ground wire may be run either inside or outside the tray. In both cases, the grounding conductor must be bonded to each section of the cable tray. Bonding jumpers, either the welded type on steel trays or lug types, should be used across each spliced joint.

When cable tray covers are used, they should also be bonded to the tray using a flexible conductor. Trays are usually bonded to the building steel, usually at every other column and to all conduits containing conductors common with the cable tray system. As shown in Figure 2, bonding jumpers — either the welded type on steel trays or the lug type — should be placed across each joint. ■

Keith Switzer is senior applications engineer at ERICO, in Solon, OH.

Circle (23) on Free Info Card

ち

ち

SNELL & WILCOX



DO YOUR SIGNALS PASS THE CLEANNNESS TEST?



YOUR BRIGHTER

Why does my signal need to be spotless in the new digital era?

Digital TV could impress your viewers with enhanced picture quality. But going digital calls for new standards of signal conditioning.

Any noise or decoding artifacts such as cross-luminance and cross-chrominance that remain in your video signal will be encoded and transmitted along with the picture.

As well as using up expensive bandwidth, these will be magnified if the picture is upconverted to HD. The solution is precision decoding and signal conditioning.



What am I missing with my current decoders?

Your racks may be full of decoders, but for the high-end decoding that is essential in the transition to digital you need a quantum leap forward in quality. The best approach is to use intelligent decoders that analyze the picture on a pixel-by-pixel basis and change the decoding parameters as appropriate. You also need to be sure that your decoder is using the best possible algorithms to guide its processing decisions.

Will my archives be able to match these new digital quality standards?

In the digital era, much of the program content will be archive material. Because this will often be mixed with digitally originated sources, it's vital that you use high quality signal processing when you retrieve it. Without precision decoding and really comprehensive signal conditioning, differences in quality will be clearly visible to the eye of the viewer.



GUIDE TO DIGITAL




What sort of filter do I need to remove different types of noise?

There is no single filter that can handle all types of noise.

Transmission systems such as satellites can cause random broadband noise and impulsive noise like "sparkles", depending on atmospheric conditions. Analog recording onto videotape can produce noise and dropout. And

then there are the scratches, dirt or grain found on film transfers. Good signal conditioning will offer combinations of recursive, spatial, median and linear filters, designed and sequenced to deal appropriately with these problems in any particular environment.

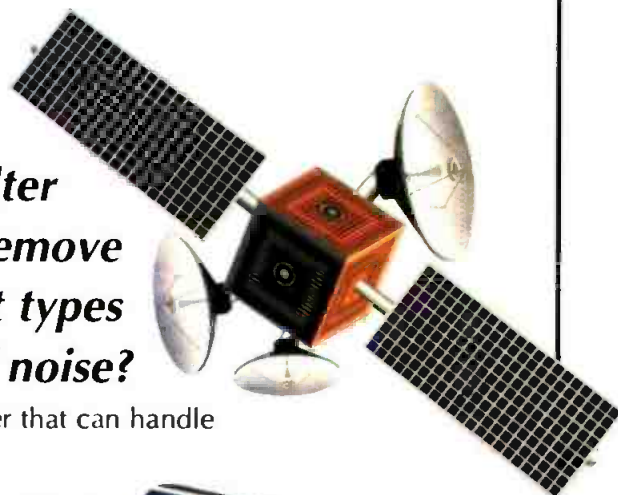

Can cleaner signals help me to save money?

Yes. Dirty, noisy signals mean inefficient compressors. That's because compression encoders cannot distinguish between noise and the real image. Worse than that, noise, being random, occupies even more of the compression bandwidth than predictable picture differences. If you clean up your signals thoroughly, you can either broadcast more channels at the same bitrate or provide your viewers with much better quality pictures.





SNELL & WILCOX



THE CLEAREST CHOICE IN SIGNAL PROCESSING FROM SNELL & WILCOX

Precise decoding, noise reduction and signal conditioning will maintain excellent picture quality in your transition to digital television.


UNBEATABLE
CLEANNESS!



MDD2000/MDD550 Digital Decoders

Unique proprietary technology ensures the highest standard of decoding currently available, no matter what the nature of the source.

NEW
IMPROVED
SIGNALS



MDD1000 Digital Decoder

A patented Digital Gate combined with line comb filters for accurate decoding of even imperfect, unstable sources.



MDD500 Digital Decoder

Adaptive field comb decoder provides crisp, sharp pictures with minimum delay mode operation.



Prefix CPP100/ CPP200 Pre-processors

The single-box solution to pre-processing, significantly reduces bit rates while enhancing picture quality. CPP200 adds digital audio embedding.

'My signals
have never
been so
clean'

SEE
THE
DIFFERENCE



NRS500 Noise Reducer

Seven advanced digital filters tailored precisely to different noise characteristics make this the definitive image enhancer.



NRS50/30 Noise Reducer

Multi-purpose noise reducers combining 3D median, recursive and spatial low-pass filters.



Superb CLEANING power -
ARTIFACTS CAN'T HIDE!

Kudos IQ Modular Range

All the functionality and control needed for going digital, noise reduction and four advanced 10-bit decoders.

For more information and product details call us on:

408 260 2800.,

E-Mail: info@snellusa.com

[www: snellwilcox.com](http://www.snellwilcox.com)






DTV Express: On the road to television's future

An ambitious educational effort takes to the streets.


By Jerry Whitaker

The challenge of moving from the familiar technology of NTSC to the largely unknown technology of DTV is that many of the important issues are still being sorted out, not the least of which is whether the possible implementations of DTV will work for any given station. The need for accurate information on digital television is at its peak now, as stations begin seriously planning for DTV transmission. The DTV Express, one of the most significant educational efforts in memory, is targeting this ongoing need.

Photo: After construction was completed, the DTV Express truck took to the road and made a stop near the U.S. Capitol building in Washington, DC. (Photos courtesy DTV Express.)

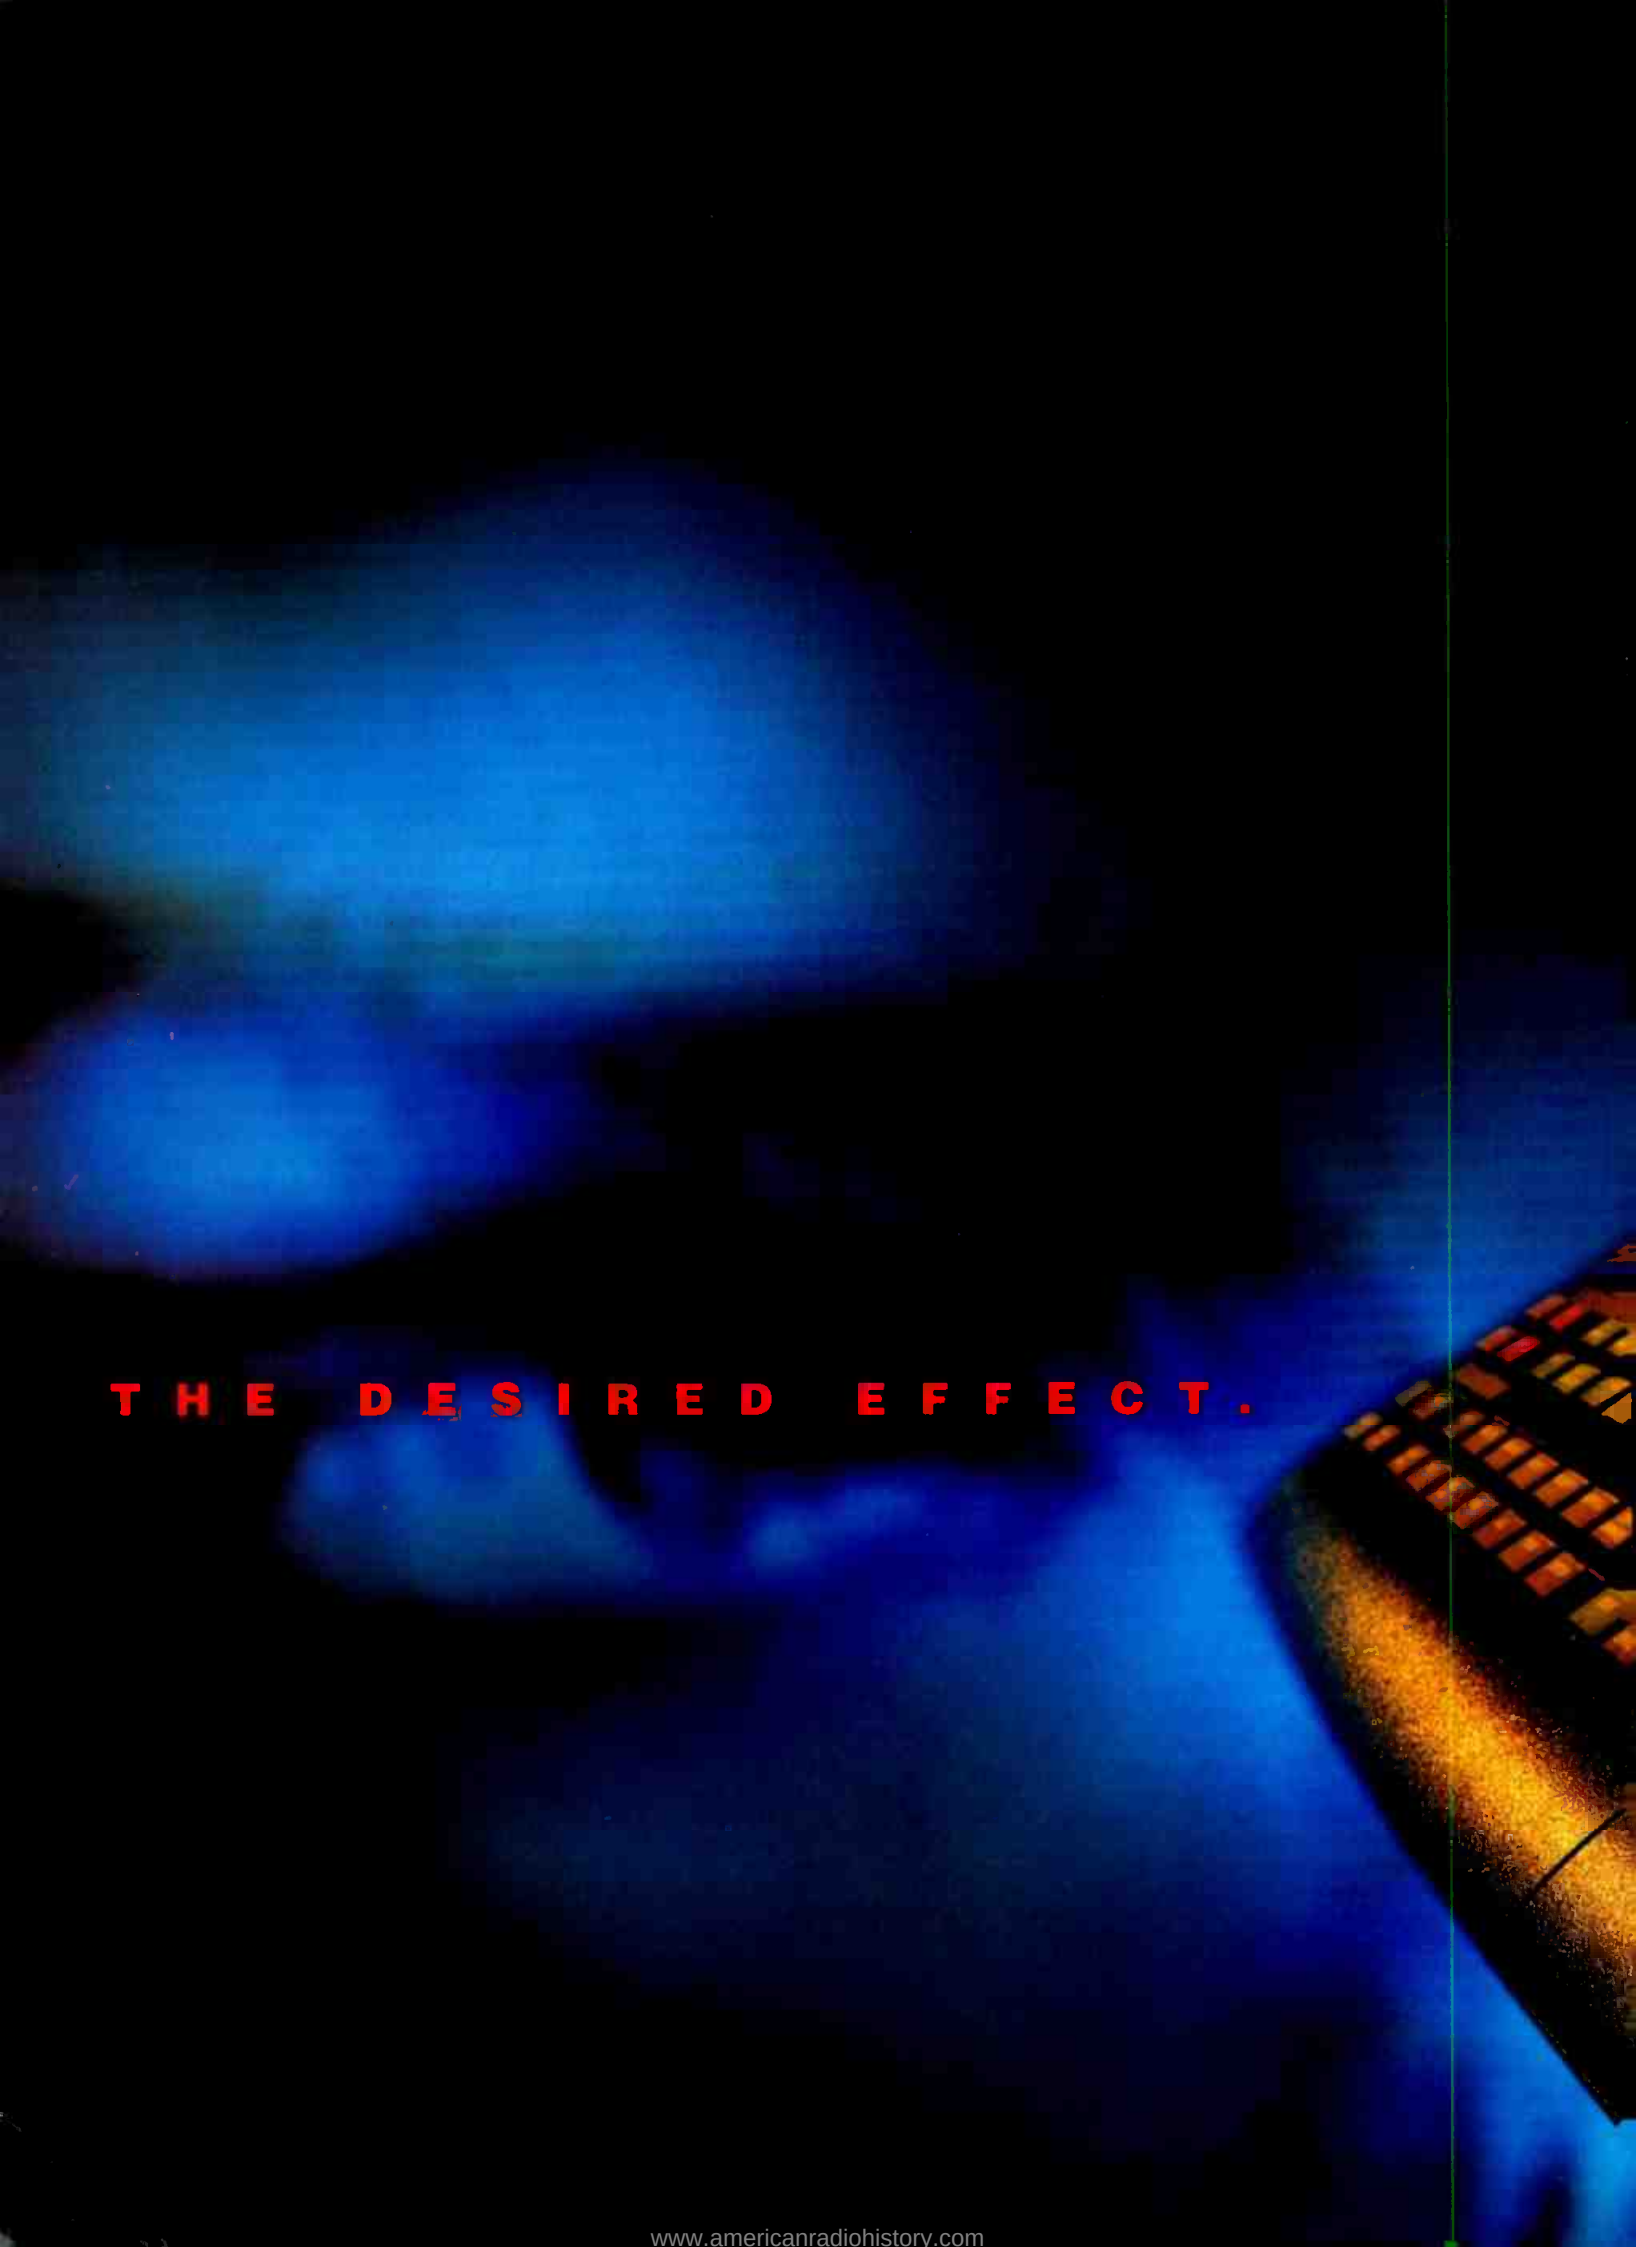

T H E D E S I R E D E F F E C T .

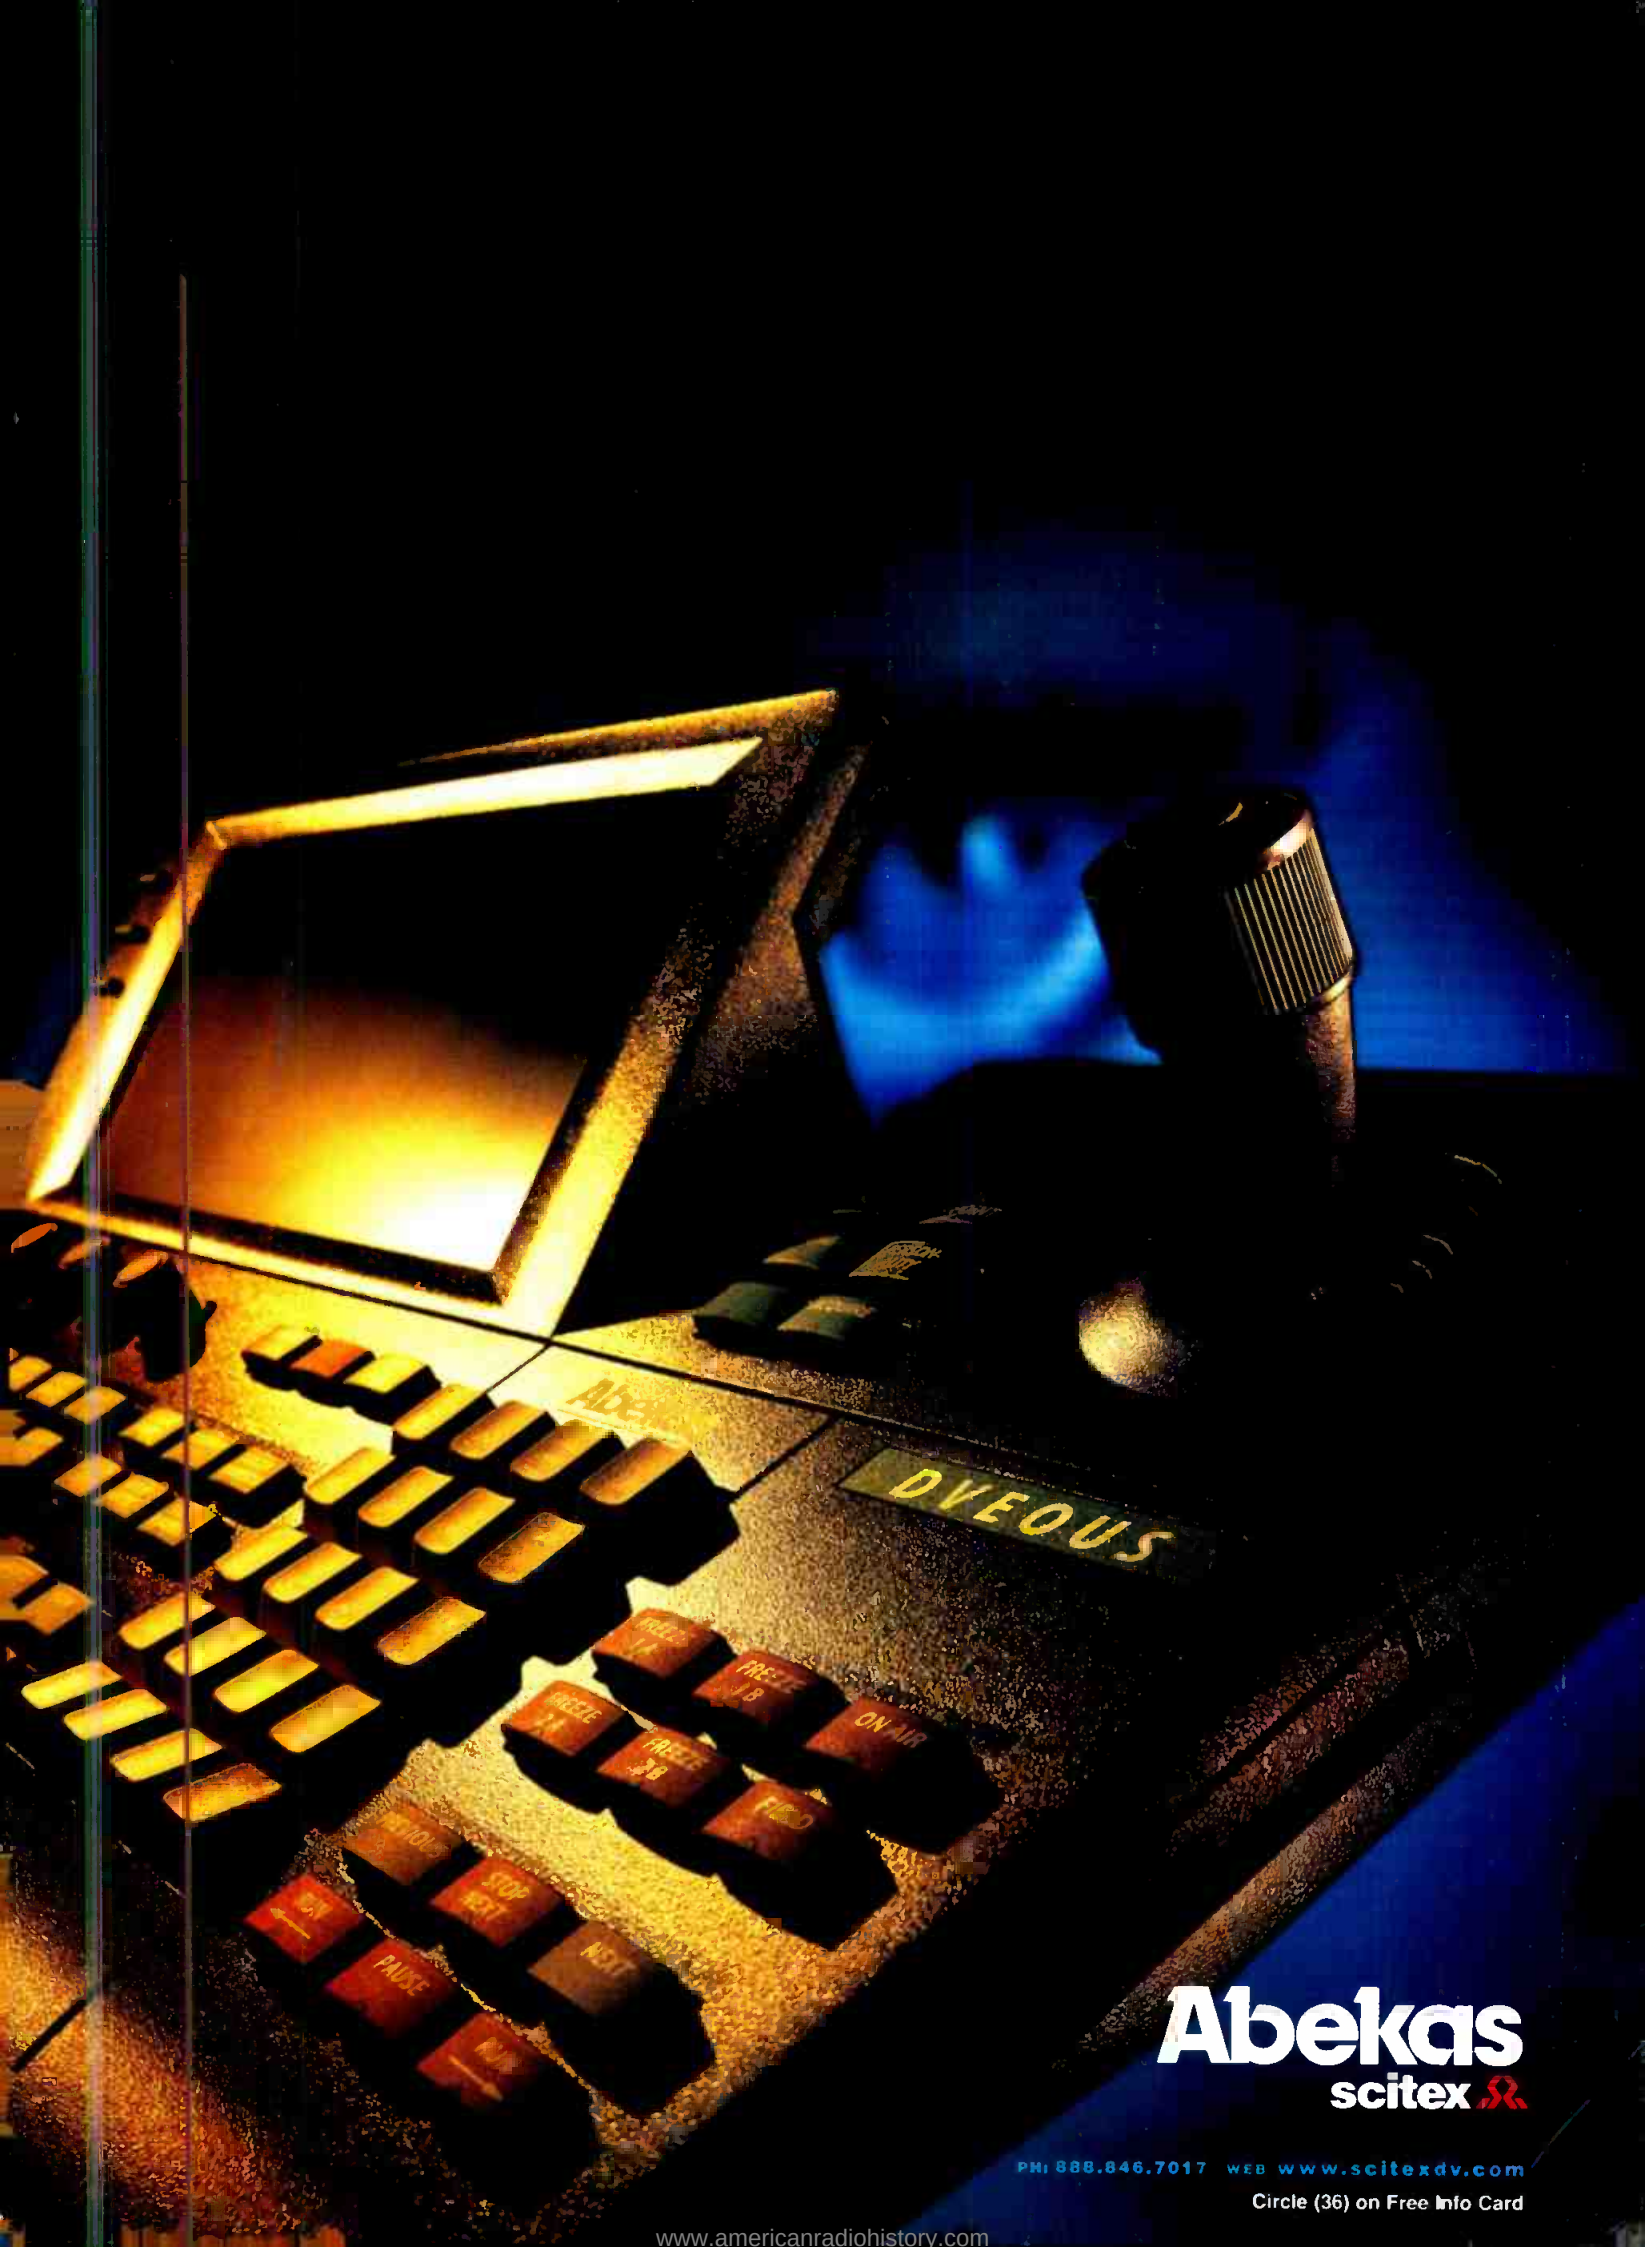


Abekas
scitex 

PH: 888.846.7017 WEB www.scitexdv.com

Circle (36) on Free Info Card

DTV Express: On the road to television's future

The DTV Express, a joint effort between the Harris Corporation and the Public Broadcasting Service (PBS), is a nationwide educational initiative aimed at informing broadcasters about the next generation of television technology — digital television. The 18-month road show includes a 66-foot tractor-trailer featuring equipment and pro-

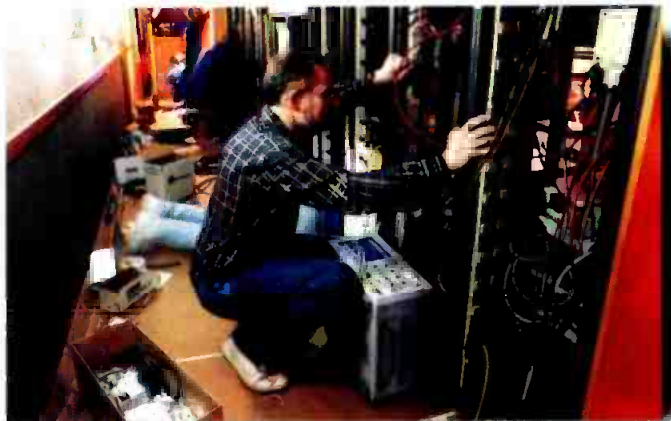

Equipment installation required an army of engineers and months of work. A significant amount of time was spent working out interface and integration issues between different systems.

www.trompeter.com

DTV Network Conversion Can Be Risky, Painful, Expensive and Disruptive.

Or You Can Call **TROMPETER** First.

Don't be concerned because you've never done this before...just call in the coax network expert.

Trompeter is the RF connection specialist with 35+ years experience working with high frequency transmission line applications. We know how to get you from here to there safely because the challenges of converting your station to DTV or HDTV are standard assignment for us.


With Trompeter you get more than high quality parts — we offer complete DTV wiring packages that include jacks, panels, cables, automated tools and training. Check it out on our website or call for our new DTV/HDTV Handbook!




Patch Panels & Jacks



BNC Connectors

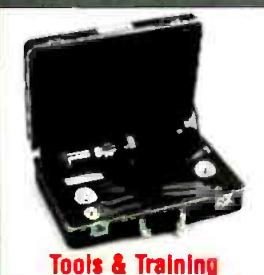

Tools & Training



Patch Cords and
Cable Assemblies



TROMPETER

® ELECTRONICS, INC.

RF SHIELDED CONNECTORS

An ISO 9001 Registered Company

GET QUOTES FAST...VISIT OUR WEBSITE TODAY!

www.trompeter.com or call: 818-707-2020

gramming demonstrations, a three-day technical and one-day management curriculum, and press briefings at approximately 40 sites throughout the United States.

The DTV Express has two primary components:

- The demonstration vehicle provides working demonstrations of DTV technology, equipment and systems. Demonstrations of end-user scenarios in a so-called living room of tomorrow are also available. Through a variety of demonstrations, the many services afforded by DTV technology (HDTV, surround sound, multicasting and data-casting) are presented.
- A training curriculum provides practical, up-to-date information about the technical, managerial, economic, legal and regulatory aspects of DTV implementation.

The goal of the DTV Express is to enable attendees to understand the full potential of DTV and avoid the potential implementation pitfalls. Naturally, a key component of this process is evaluating DTV transition options for various types of stations.

Speaking from personal experience, this observer can attest to the enormous effort that the organizers have put into the project and to the wealth of information now available to the TV engineering community.

Inside the truck

The DTV Express truck, which was integrated by Harris Broadcast Systems Group, is divided into two areas: the technical plant (station areas) and the consumer areas. The station side contains studio and transmission equipment that broadcasters need for their

Circle (37) on Free Info Card

DIGITAL BROADCASTING
IS COMING ON FAST.

are you ready?

The AvidNews Environment is.

When top broadcasters like CNN, Tele-Metropole and the Belo Group prepared themselves for the digital broadcasting revolution, they relied on the AvidNews™ Environment to get them there. With high-caliber components like video editing and playback, media workgroup and newsroom computing systems, it's no wonder more than 1,100 broadcast sites from around the world rely on the expertise and experience of Avid to bring them into the digital broadcasting era. That's because, over the past 10 years, we've asked the right questions, and have developed digital broadcasting tools built with the specific needs of broadcasters in mind. Tools that are powerful, easy-to-use, and work as well on their own or, as part of a complete solution. When it comes to digital broadcasting, the AvidNews Environment is ready for tomorrow—today.

Call us now and you will be too.

Don't settle.



Call 800 949 AVID
www.avid.com/broadcast

Avid

tools for storytellers™

Circle (27) on Free Info Card

© 1998 Avid Technology, Inc. All Rights Reserved. Product specifications subject to change without prior notice. Avid is a registered trademark and AvidNews and tools for storytellers are trademarks of Avid Technology, Inc. All other trademarks contained herein are the property of their respective owners.

Priority Code: ANBCE698
www.americanradiohistory.com

DTV Express: On the road to television's future

transition to digital. The consumer side comprises a living room or "home theater of tomorrow," if you will. The consumer side showcases the digital television appliances and services that consumers will likely have in their homes in the near-term future.

The station area of the truck includes typical equipment for a local network affiliate or PBS member station. Capabilities include reception of network feeds, local insertion and program origination, datacasting, ATSC encoding and multiplexing. It also includes the studio to transmitter link, 8VSB and NTSC transmitter exciters, off-air monitoring and test-and-measurement equipment.

Technical systems are configured to handle high-definition in the 1080i format and standard definition in 480i format. Progressive formats will be added with planned equipment upgrades during the tour.



The completed master-control area, showing the slide-out video and audio switchers.


Station-area capabilities

So what can you do in the truck? The following capabilities are provided to

show engineers how HD can be handled at the station.

High-definition (distribution is un-

Transmission line for any DTV application

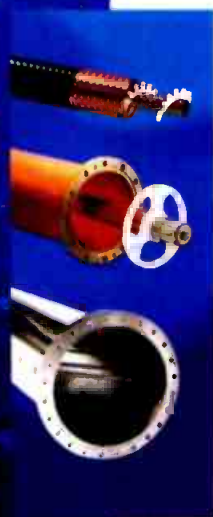

Coaxial Cable. Ridged Line. Waveguide.

Whatever your needs for DTV transmission line-coaxial cable, thermally compensated rigid line or circular waveguide—Andrew can supply it. Reliable HELIAX® air dielectric coaxial cable is available in sizes up to 5", including new high power HJ9HP-50 cable with an average power rating higher than 6-1/8" cable. HRLINE® and MACXLINE® rigid coaxial lines are thermally compensated to provide twice the life of standard rigid lines; now shipped in sizes from 3-1/8" to 8-3/16". GUIDELINE® circular waveguide has cross-polarization cancelling rods for lowest attenuation and highest power. All are conservatively rated. For any power or attenuation needs, contact Andrew first.

1-800-DIAL-4-RF

Andrew Corporation
10500 W 153rd Street
Orland Park, IL 60462
Visit our Web Site at
<http://www.andrew.com>

ANDREW®

*In A Communicating World
Andrew Is Everywhere*

Circle (28) on Free Info Card

CLASS FOUR RAPIDS...

Your guide has never navigated this river.

Feeling a bit concerned I bet ...

You Should Be!



**Converting your facility to digital?
Having the same feeling in the pit of your stomach?**

Digital System Technology

System Design • Engineering • Equipment Procurement • Installation

*Not only have we navigated this river before ...
We were their first ones down it.*

Digital System Technology, Inc., System Integrator for KITV,
the first licensed digital television station in the United States.

Digital System Technology, Inc. assisted KITV in their selection of
JVC Digital S as their new digital tape format.



Digital System Technology, Inc.

16027 Arrow Highway, Suite D / Irwindale, CA 91706

Phone: 626/472-7701 Facsimile: 626/472-7710 Website: www.dstech.com

Circle (29) on Free Info Card

www.americanradiohistory.com

JVC
DIGITAL S
4:2:2

DTV Express: On the road to television's future

compressed at 1.485Gb/s, SMPTE 292M standard):

- HDTV basic production equipment, including a digital switcher with DVE.
- HDTV camera.
- D-5 VTR recorder.
- Up and down format converters.
- HDTV monitoring, digital routing and video system equipment.

Standard definition (distribution is uncompressed at 270Mb/s, SMPTE 259M standard):

- 16:9 SDTV camera.
- Graphics system.
- DVCPRO VTR.
- SDTV four-channel video server;
- SDTV four-channel master-control switcher.
- SDTV monitoring, digital routing and video system equipment.

Audio (distribution is AES/EBU throughout, with stereo, Dolby Prologic and six-channel AC-3 capability):

- Digital audio mixer.



The home theater section of the truck includes a variety of display types and ancillary services.

- CD and digital audio storage.
- Monitoring and other audio system equipment.

Master clock, time code and automation systems:

- Data broadcasting origination equipment.

TAPE COMPRESSION

Winsted
Pull-out
Tape
Storage
System



One of
many
styles to
choose
from.

There's more than one kind of tape compression.

Floor space is expensive, so Winsted finds creative ways to store as many tapes as possible into the smallest space. In fact, you'll store more tape in less space. Our free design service helps you plan your library system. Call a Winsted design engineer today at 800-447-2257.

FREE CATALOG CALL OR WRITE

1-800-559-6691

Fax: 612-944-1546 • Web site: www.winsted.com • email: racks@winsted.com

Winsted


Preferred by Professionals Worldwide®

10901 Hampshire Ave. So., Minneapolis, MN, USA 55438

Don't get tangled in the Web

Use the *Internet for Broadcasters* as your guide

This first edition of an annual publication covers the effects of the Internet on broadcasting. The

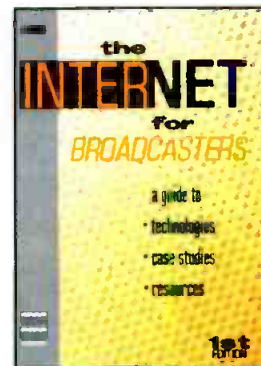

content includes technology and management articles, case studies, and a directory of Internet resources, which lists Web sites and email addresses for equipment suppliers, services, information sources, and organizations, as well as newsgroups and search facilities of interest to broadcast, video, and audio professionals. Softbound, 92 pp. ISBN #0-95178-267-3.

Order #2673, \$29.95

To order, call **800-543-7771**


INTERTEC
PUBLISHING
A PRIMEDIA COMPANY

**Broadcast
ENGINEERING**

IFBQ98B

Circle (30) on Free Info Card

**THE DATA COMPANY THAT KNOWS VIDEO
LIKE THE OTHERS DON'T.**

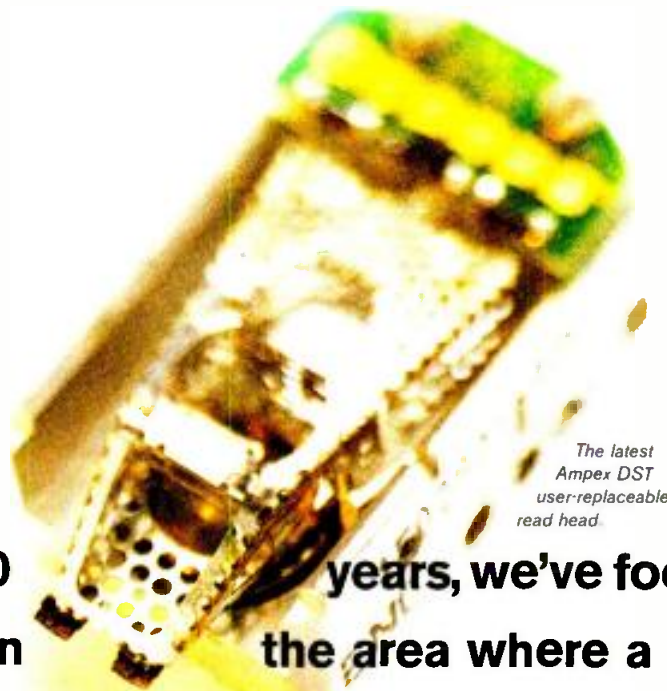

*The latest
Ampex DST
user-replaceable
read head.*

For over 50 years, we've focused our whole company on the area where a read/write head passes over a recording surface. This point of contact between data and machine is the center of everything we do. With this technology as a core, we've earned over 7000 patents. Including a number of advances that have literally made the broadcast industry what it is today. And now, we think you'll be interested in our latest breakthrough. The scalable Ampex DST[®] family of products. Digital video archives with accessibility that nobody else can match. In fact, we can archive or restore files up to 6x faster than any other device on the market. And there's a good reason our technology is so far ahead. Because we've put the full weight of our experience behind digital archiving since 1991. So if you want a company that can take you into the next generation of video technology, that's us. Because that's what we've been doing for the last 50 years. To know more, call 1-800-752-7590, or go to www.ampex.com

AMPEX

Circle (38) on Free Info Card

Fibervision® For SDI...



Taking Serial Digital Video Transmission Farther.

The signals are loud and clear: SDI video is the new standard for professionals everywhere. Now that you've made the upgrade, you're looking for a transmission system that's just as advanced as the equipment it ties together. Introducing Fibervision® for SDI, our first fiber optic transmission system specifically designed to carry serial digital video signals.

The fact is, old-fashioned coax cable systems can only take digital video signals a few hundred feet reliably. But Fibervision for SDI transmits serial digital video signals – with or without embedded audio – over a mile, with absolutely no signal degradation! Fibervision for SDI supports all levels of SMPTE standards, transmits over standard multimode fiber, and is immune to electrical and environmental interference. It's adjustment-free, easy to operate, and easy to afford – just \$995 each for the transmitter and receiver.

Best of all, it comes from the company you already depend on for award-winning video products like our Scan Do® family of scan converters. That same innovative technology enables Fibervision for SDI to help you get the best out of your serial digital video equipment. So take this opportunity to find out more about Fibervision for SDI. Then take your digital video environment all the way to maximum performance.



Phone: 516-273-0404 / Fax: 516-273-1638
E-mail: info@commspecial.com
INTERNET: <http://www.commspecial.com/BE.htm>
FaxNOW Call 1-888-4-FAX NOW or
1-516-273-1710 to retrieve information

Fibervision and Scan Do are registered trademarks and FaxNOW is a trademark of Communications Specialties, Inc. ©1998 Communications Specialties, Inc.

DTV Express: On the road to television's future

ment.

• Studio to transmitter link (multiplexed ATSC and NTSC programs).

Transmission and RF:

- 8VSB exciter.
- NTSC exciter.
- RF "impairment generator."
- Equipment to demonstrate DTV/DTV

DTV Express Sponsors and Equipment Providers

The process of putting the DTV Express truck together was an industry-wide effort. Some of the companies involved include:

- 360 Systems
- ADC Telecommunications
- AmPro Corporation
- Barbizon Light
- Belden Wire & Cable Company
- BEST Power
- Chyron Corporation
- Clear-Com Intercom Systems
- COMPAQ
- Dolby Laboratories
- EF Data
- Harris Corporation Broadcast Div.
- Hewlett Packard
- Ikegami Electronics
- Intel
- JBL Professional
- Lanier Worldwide Inc.
- Leitch Incorporated
- Lucent Technologies
- NETSCAPE
- NUCOMM
- NVISION
- Panasonic
- Philips
- PRODELIN Corporation
- Samsung Electronics
- Sencore
- Snell & Wilcox
- Stanford Research Systems
- Sun Microsystems
- Sunfire Corporation
- Symetrix Inc.
- Tally Display Corporation
- TASCAM
- Tektronix
- VEGA
- Vinten Inc.
- Wohler Technologies
- YEM Inc.
- Zaxcom Inc.

"5 Doctorates, 34 degrees and 32 technical qualifications, combined with over 1500 years of UHF Broadcast experience, have worked to make EEV IOTs the world's No.1 choice for high power analog UHF TV transmitters. A purchasing decision made easier for you when considering that analog IOT transmitters are upgradeable to digital operation.



Additionally in preparation for the digital broadcast age, EEV has developed a full range of digital IOTs. Production resources have been increased, ensuring your access to unrivalled products and engineering support. Who better to help you into the digital age than EEV?"

The Team Behind The Power of EEV Digital IOTs



EEV

A SUBSIDIARY OF THE
GENERAL ELECTRIC COMPANY PLC
OF ENGLAND

USA: EEV Inc, 4 Westchester Plaza,
Elmsford, NY 10523
Telephone: (914) 592-6050
Toll Free: 1800 DIAL EEV
Facsimile: (914) 682-8922
E-mail: info@eevinc.com


UK: EEV Limited, Waterhouse Lane,
Chelmsford, Essex CM1 2QU England
Telephone: +44 (0)1245 493493
Facsimile: +44 (0)1245 492492
E-mail: info@eev.com

CANADA: EEV Canada Ltd,
6305 Northam Drive, Unit 3, Mississauga,
Ontario L4V 1H7
Telephone: (905) 678 9811
Facsimile: (905) 678 7726
E-mail: info@eevinc.com

Circle (40) on Free Info Card
www.eev.com

AT THE HEART OF YOUR DIGITAL UHF TV TRANSMITTER

www.americanradiohistory.com

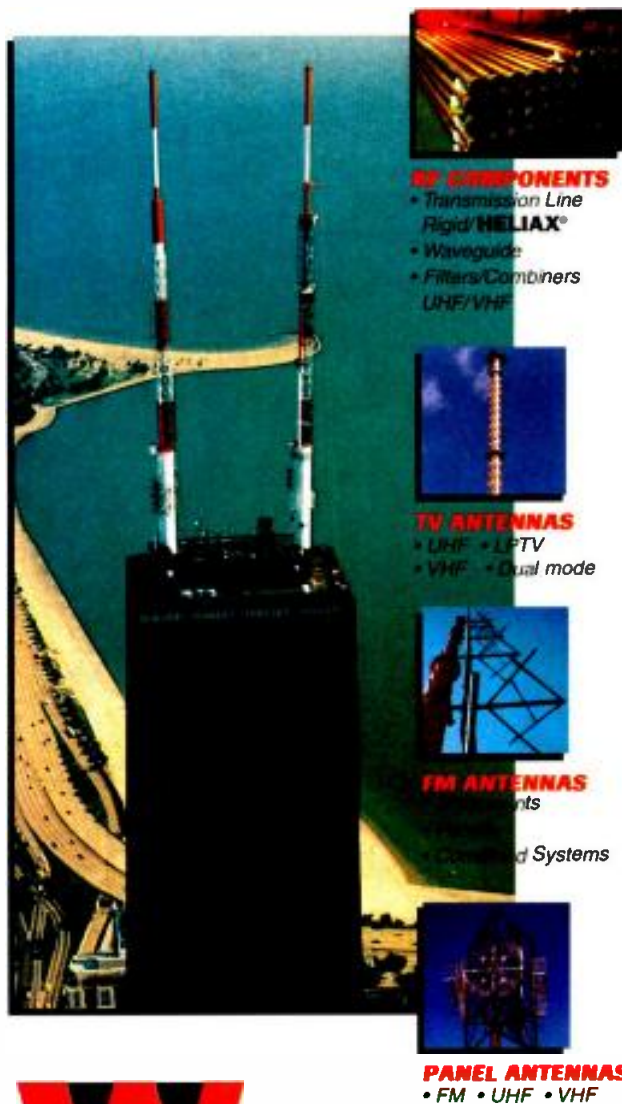

When You Want More Than Just An Antenna



Made in USA since 1954

JAMPRO ANTENNAS/RF SYSTEMS, INC.
P.O. Box 292880
Sacramento, CA 95829 USA
Phone (916) 383-1177 • Fax (916) 383-1182

www.jampro.com • E-Mail: jampro@ns.net

HELIAX® is a registered trademark of Andrew Corporation

DTV Express: On the road to television's future

and DTV/NTSC RF interference.

Satellite hardware:

- Satellite receive-only earth station, Ku-band.
- Digital and analog demodulators.
- Decoder for satellite compressed bitstream.

Other support hardware and systems:

- Antenna, receiver, demodulators and decoders for HDTV and SDTV ATSC and NTSC.
- HDTV, SDTV, and audio monitoring, routing, distribution and conversion equipment.

Consumer area capabilities:

- HDTV and SDTV video projectors.
- Six-foot 16:9 screen, 34-inch direct-view DTV and 27-inch NTSC TV sets, 42-inch flat-screen plasma display.
- Six-channel surround-sound audio system.

Data broadcasting:

- Computer system with ATSC receiver/decoder plug-in cards.
- Computer printer.

All aboard

The DTV Express instructional effort is unique in broadcast history. This ambitious program has already played to good reviews by attendees in Los Angeles, San Francisco and other stops along the DTV Express route.

As with most areas of technology, digital television is easy to understand once you understand it. The DTV Express goes a long way toward providing answers to some of the industry's toughest questions. ■

Editor's note:

For more information on the DTV Express, contact the DTV Express web site at www.dtvexpress.org or call 1-888-733-3883.

Jerry Whitaker is a consulting editor and author of numerous books on broadcasting and technology.

DTV Express tour schedule

The remaining stops on the DTV Express tour for 1998 are:

- WNET, New York, Aug. 3-7
- New Jersey Network, Trenton, NJ, Aug. 10-14
- WHRO, Norfolk, VA, Aug. 24-28
- KET, Louisville, KY, Aug. 31-Sept. 4
- WETA, Washington, DC, Sept. 7-11
- Wisconsin PTV, Milwaukee, Sept. 21-25
- Ohio PTV, Columbus, OH, Sept. 28-Oct. 2
- Boston (site to be determined), Oct. 5-9
- WFYI, Indianapolis, IN, Oct. 19-23
- South Carolina PTV, Columbia, SC, Oct. 26-30
- WJCT, Jacksonville, FL, Nov. 2-6

Comark's Advantage Is Digital.

COMARK invites you to view the future now. Our **Advantage** Transmitter with 100% digital 8-VSB Modulator is a new hallmark in broadcasting history. It's proof-positive of COMARK's commitment to deliver digital technology that revolutionizes the industry. "Advantage" is the heart and soul of COMARK's innovative family of products and services defining the digital age.

100% DIGITAL MODULATOR. Digital signal processing with the clearest possible output. (SNR better than 33dB).

DIGITAL ADAPTIVE PRECORRECTION. Highest quality signal with the least effort.

NETWORKED SYSTEM CONTROL. Our flexible architecture gives you the information and control you need.

SCALABLE TRANSMITTER CONFIGURATIONS. 100% redundancy, a requirement in the digital world.

INTUITIVE GRAPHICAL USER INTERFACE (GUI). This places the entire system and related information at your fingertips.

COMARK QUALITY AND SUPPORT. The power of innovation and experience — COMARK pioneered high power UHF ICT transmitters.

 To us, forcing analog into a digital world is not an option. Delivering 100% reliable digital services such as HDTV, multicasting and data requires a technological partner capable of going beyond theory. COMARK Digital Services (CDS) is an experienced leader in digital television systems solutions.

For complete, detailed information and working specs, view our website: www.comarkcom.com.

Now you know why COMARK's Advantage is digital.



COMARK Communications, Inc.: Tel: 1-413-569-0116 Fax: 1-413-569-0679
COMARK Digital Services: Tel: 1-703-838-5655 Fax: 1-703-838-1687
www.comarkcom.com



 **COMARK**
a Thomcast company

Circle (44) on Free Info Card

So you need to buy a transmitter?

Choose carefully, there's a lot riding on this decision.

By Don Markley




Congratulations. You have finally reached the point in your professional career where you are part of "management." That is, you have attained the experience and expertise necessary for the owners and the station manager to look to you to select the new transmitter. For any size station, the transmitter is a significant investment that represents a large portion of the physical facility's value. Now, don't let it make you nervous. But remember, from this day forth, you will be known as the brilliant technical mind that boldly led the station into the next millennium or the idiot who bought that piece of junk in the back room.

In the early days of television, there was one brand of equipment that was considered by the majority of technicians to be the industry leader. With one possible exception, it was. Unfortunately, neither of those brands survived, which certainly gives one room for thought. Today, their names can be

used without the fear of favoritism. RCA was thought by many to be the leader with regard to performance (it certainly was never considered to be the cheapest). If you didn't like RCA, you almost certainly were a GE fan. Of course, there was a ragtag element who sought out something else. In other words, there were the "big two" and "others." Many chief engineers simply placed all orders with their choice of the "big two" without further thought. Those who purchased RCA above anything else were said to suffer from "meatball worship," referring to the globe used as a symbol on that company's equipment.

There was a lot to be said for that approach to equipment purchases. By buying only RCA or GE, stations could be sure that they were getting the best equipment available. When the bills came, it was obvious they were also *paying* for the best. With rare exceptions, no one was ever fired for buying RCA and that same adage has been to applied to IBM. Well, today,

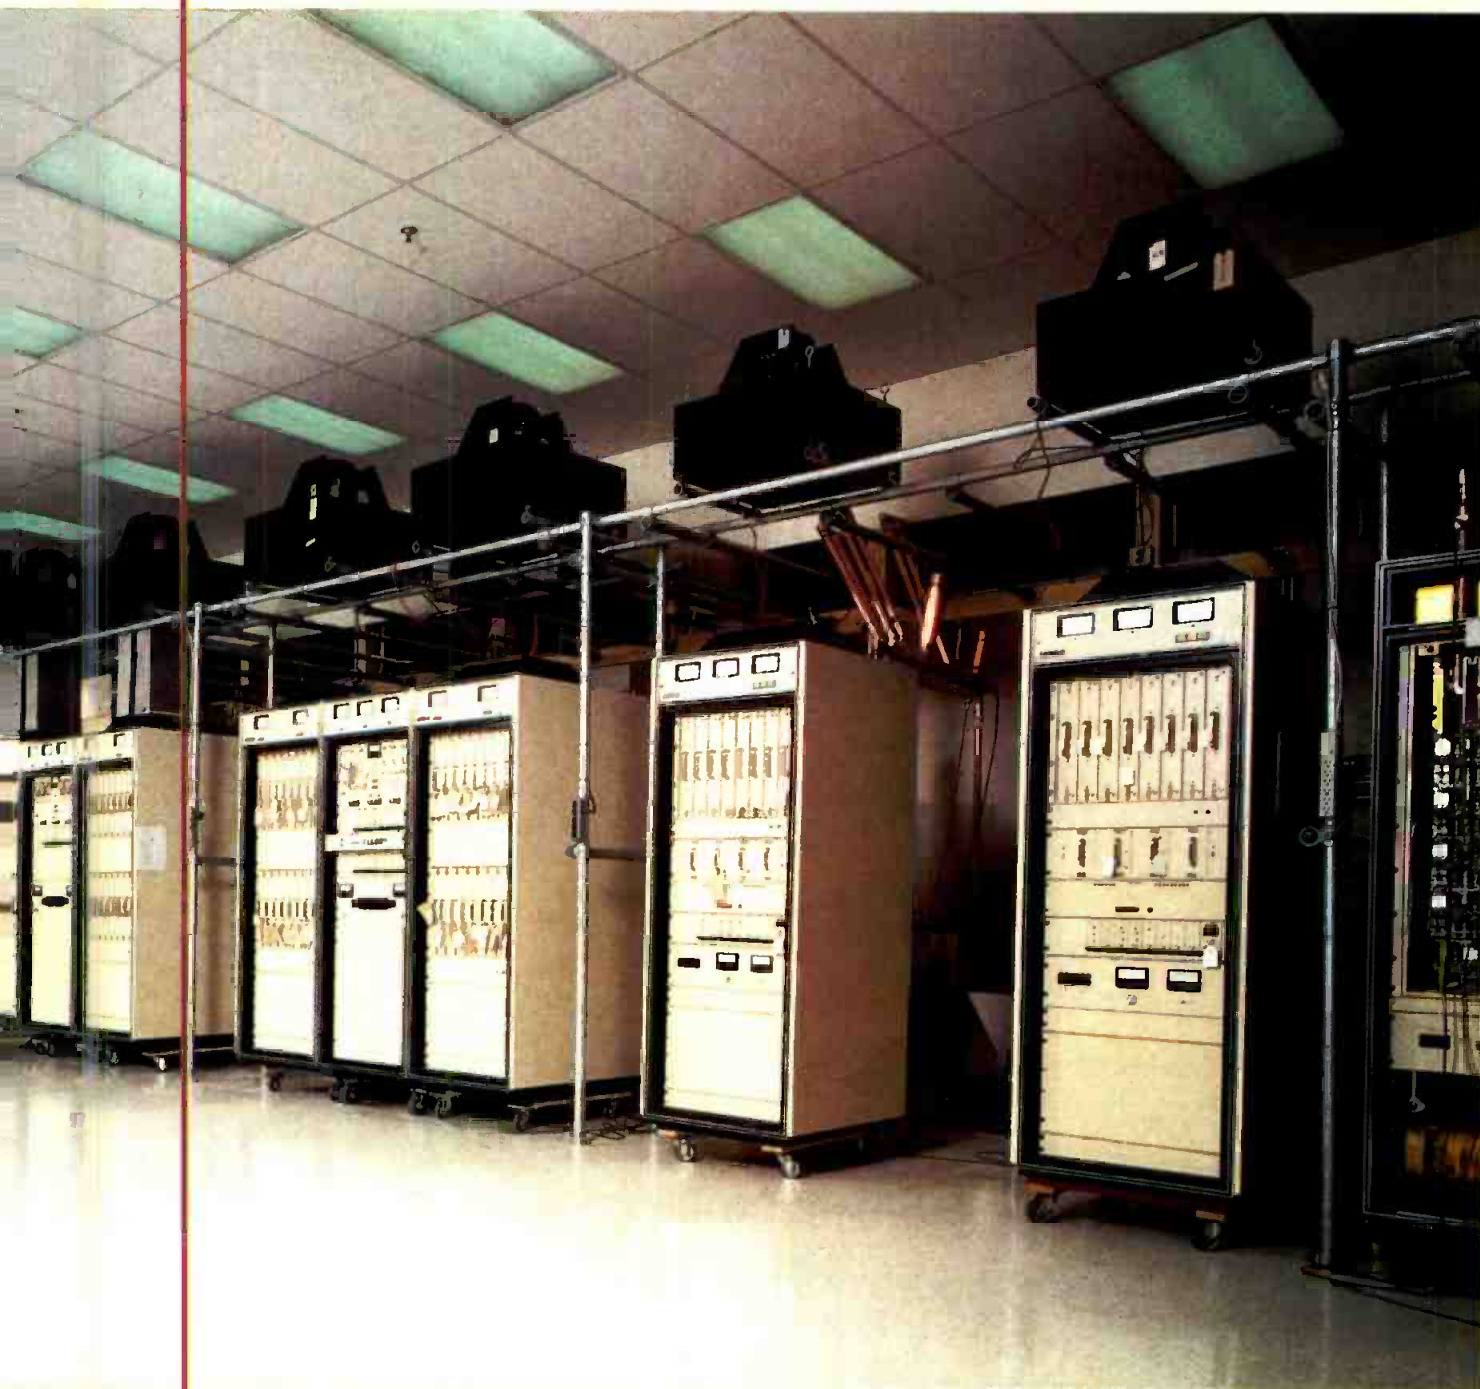

no one is going to buy RCA — they're out of the transmitter business. Otherwise, the adage would be as inappropriate as it is now for IBM.

The reason for all of this is simple. Regardless of a few closed-minded industry curmudgeons, these days, no one makes a bad transmitter. For one thing, the design folks move around from company to company — not as much as salesmen — but they still move around. Many of the skills developed by one company move along to other companies. As an example, years ago, a good design engineer left Harris, where he had been heavily involved in the design of its TV transmitters. He eased

over to RCA where he blended his Midwest engineering skills with the East Coast crowd. The result was the RCA G-line of transmitters. He then went out on his own, along with a couple of guys who were experienced in business management and sales. The result was a company that provided a ton of exciters to upgrade old systems, produced excellent ITFS/MDS transmitters and now is moving on into high power.

Today's market

As a result of all this blending of information, not to be confused with inbreeding, there are no products out there that can be considered really bad.

Therefore, they *all* need to be considered when making a purchase. As always, the first step is to look carefully at the transmitters available. The purpose of this article isn't to pick out a piece of hardware for you, but we will provide a brief overview of what is available. Then, we will look at the other areas of concern in the selection process.

Let's start with Harris. Its solid-state line of VHF transmitters is well-tested in the field, and they are a good example of mature products. Enough units have operated for enough hours to find and

Photo: Larcam transmitters in final testing at the factory.

So you need to buy a transmitter?

eliminate the bugs. For VHF, tubes are essentially gone; however, for UHF, the question still lurks in the shadows. As that comparison has been discussed previously (see "Transmission and Distribution," May 1998, p. 48), let it be sufficient to say that the primary choice

Those who purchased RCA above anything else were said to suffer from "meatball worship."

between solid-state and vacuum devices is a function of power levels and the associated costs.

Harris also has a mature UHF transmitter using the various configurations of IOT. The company has added an excellent solid-state transmitter that will



Testing of solid-state ABE Elettronica TX1000/U which employs LD MOS semiconductors. With a digital modulator, units can work with DVB and ATSC signals.

operate at the higher power levels for DTV. Its only drawback at this time is cost — which is significant — as is everyone else's high-power solid-state approach. It is reasonable to say that the Harris solid-state UHF probably is a good indicator of what most systems will be like in the future; that is, lots of built-in aids for control and troubleshooting, decent efficiency and lots of redundancy. All decent solid-state transmitters will permit module replacement

while on the air. Additionally, they should, as does the Harris system, have multiple independent power supplies to make the overall system as bulletproof as possible.


For UHF, Comark, a Thomcast company, is the real fairy-tale story of achievement. The company is one of the industry leaders, and it has developed its product into a first-class system. Comark's transmitters are oriented toward the use of multiple IOT devices of all sizes and brands. It has spent a great deal of work preparing its transmitters to be capable of changing over from NTSC to DTV with a minimum of equipment replacements.

Larcen has enjoyed success in the VHF market and, since joining with TTC, is coming on strong in the UHF area. Its solid-state VHF line, like the Harris line, is mature. The company has gained experience with its units and offers a good, stable product. Larcen's new DTV units have sophisticated control systems that are built-in; this is becoming the industry norm. The company's UHF transmitters are a substantial redesign of the TTC systems. Again, the high-power units are designed around the various configurations of the IOT.

There are several other companies that, while often smaller, offer some good



The Comark "IOX" transmitter installed at WXIN, Indianapolis.

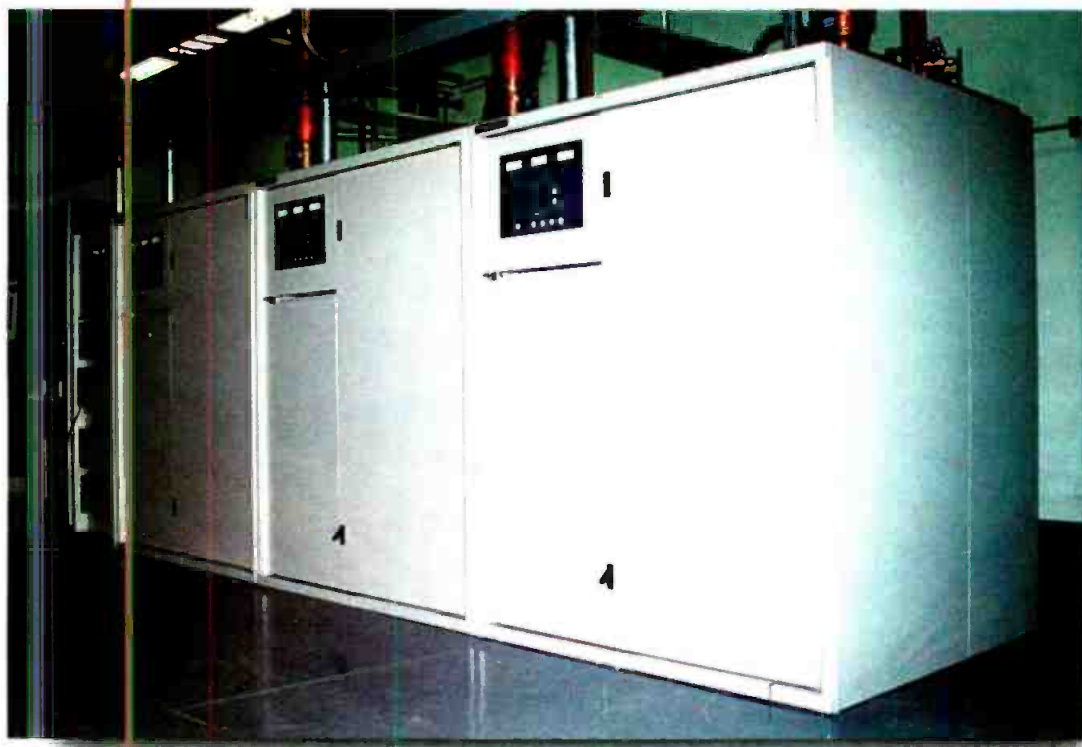

Harris offers a variety of configurations in its Sigma line. Shown here is a three-tube version.

transmitters. A prime example is Advanced Broadcast Systems. Without a lot of hoopla, this company has been building a good, solid transmitter. Primarily high-power and based on IOTs, the Advanced Broadcast Systems' designs have not gone to the compact, shove-it-in-as-little-space-as-possible mode. The company has stayed with large cabinets that feature outstanding serviceability; in other words, you can get inside the units to work on them. The transmitters do have some unique characteristics in their correction circuitry, in that separate correction is applied to each individual IOT. Ask the company salesman to explain this feature further.

Acrodyne, an established company in the translator field, added higher-power transmitters several years ago and now is into the full-power area with the Diacode (for more information, see "Tubes for DTV," p. 94 in this issue.) Acrodyne has grown up admirably and was the first to introduce the Diacode in the U.S. market. While the majority of Acrodyne's experience is in the 1kW through 5kW sizes, the company now has several 10kW and 30kW tube transmitters in the field. Acrodyne's Diacode-based systems have

some distinctive features, including what may be the easiest way to do first adjacent-channel diplexing of NTSC and DTV signals (see "Adjacent-channel DTV/NTSC transmitters using Diacodes," Feb. 1998, p. 124).

The ITS transmitter line has now been integrated into the ADC portfolio. The ITS systems started as translators, LPTV transmitters, MMDS/ITFS equipment and replacement exciter/driver systems. Higher-power equipment has been added to its line. The company's reputation over the years has been one of high-quality products, and ITS definitely

These days, no one makes a bad transmitter.

should be looked at as a real contender in the rush to DTV.

A well-known radio name, Continental, has recently introduced a new solid-state UHF transmitter. While currently only available in the lower-power levels, the plan is to increase to higher-power units. A big feature is that the exciter is fully software controlled. To switch from NTSC to DTV only involves issuing the appropriate instructions to the control-

ler. This feature provides much flexibility especially where it may be used as an auxiliary transmitter.

Other domestic manufacturers that need to be considered include EMCEE and Astre. Finally, there are several international manufacturers that are definitely in the U.S. market for the long haul. Without going into all the names, the European manufacturers such as ABE Elettronica Spa, Elettronica Industriale, Itelco (which recently established offices in the United States) and PESA should definitely be looked at prior to making a decision. In a similar fashion, the Japanese manufacturers have clearly demonstrated excel-

lent products for the U.S. market, such as the solid-state units (UHF and VHF) from NEC. No market evaluation is going to be complete without their consideration.

Making your decision

Once you have gathered information on all the available equipment, there are other considerations to include in the decision-making process. Be careful when dealing with new technology. Today's breakthrough may turn out to be a loser. There is a great deal to be said for staying with well-tested technology — as long as it doesn't cause one to ignore significant advances. In other words, be ready to accept new ideas, but do so with caution. If you are buying something on the cutting edge, insist on higher than

the normal amount of warranty protection from the manufacturer. Be willing to move into new technology but only if the manufacturer provides you with that parachute, while they are gaining experience with the new product.

Next, an important area is customer support. This falls into at least three areas. First, when the transmitter is installed, it is highly recommended that you have the manufacturer perform a

So you need to buy a transmitter?

complete check of the installation before the voltage is turned on for the first time. If the manufacturer determines that the installation is acceptable and that everything is ready for operation, your warranty will not be wiped out if that new IOT is blown out of the cabinet.

Second, no technician should have to learn one of today's sophisticated transmitters, with their microprocessors and exotic amplifiers, without formal training. Be sure that the manufacturer offers classroom training on your proposed transmitter, complete with appropriate written materials.

Finally, you must be able to contact the manufacturer's support personnel when troubles occur. When you are trying to fix that mountaintop transmitter at three in the morning, an answering machine just doesn't cut it. You must *demand* that there be 24-hour-a-day technical assistance available. If in doubt as to the availability of such service, call in the middle of the night and see if someone answers. They might not like being tested in that way, but they won't mind if it turns into a transmitter sale.

Next, don't simply take a salesman's word concerning how well the equipment performs. If they are proud of their systems, they will gladly provide you with a user's list for the exact transmitter you are considering. Call several users and discuss the transmitter in

detail. They should be able to tell you about the problems they have encoun-

tered, if any, and give you a good idea of the overall equipment performance.

After you have narrowed down your selections for your new transmitter, sit down with the corporate bean counter and work out a few details. First, determine the total power draw from the line for each of the prospective transmitters at your power level. Second, find out the life expectancy of the final amplifiers, either solid-state or vacuum and determine the cost of their replacement or repair. For vacuum devices, see if rebuilding is available. For solid-state modules, how much does it cost for factory repair if they are not field-repairable? Now, let your accountant determine how much each transmitter is going to cost you over the next 20 years. At the present time, interest rates are low. As a result, it may be less expensive to come up with a little more money



The WKAR transmitter site in Lansing, MI, is home to this transmitter from Advanced Broadcast Systems.



An Itelco 604K 80kW IOT undergoing final acceptance tests at the factory.

now to buy a more efficient transmitter with lower operating costs over its lifetime. Look at the tax advantages of a fully leased package as compared to an outright purchase. All of these financial concerns can be covered for you by a competent accountant. They involve a number of issues that are non-engineering and vary from station to station,

depending on organizational structure, tax status and available capital. Don't be afraid to seek help in these areas. As an engineer, you aren't expected to walk on water — but the dampness should stop at knee level.

Remember, before you make the final decision, select your purchase based on performance, desired amplifier type,

the reputation of the equipment in the field and the customer support that is attested to by other users. Although brand loyalty is nice, you have to buy the unit that will provide reliable service at a competitive cost over the years. Good shopping. ■

Don Markley is president of D. L. Markley and Associates, Peoria, IL.

A transmitter's real costs

By Steve Epstein, technical editor

The cost of a transmitter over its lifetime is based on a variety of factors, among them, initial purchase price, efficiency, maintenance and residual value. Beyond those factors are financial considerations, such as the cost of money. As engineers, the primary considerations are found in the first sentence. The other items can be discussed with your corporate accountant. One final consideration is the cost of being off-the-air, which is something to discuss with the GM and corporate management. Let's look at the technical issues.

• **Purchase/installation price:** It is fairly easy to get a handle on the purchase price of a transmitter — some companies even list them on their web pages. However, don't forget those little extras that are part of getting that transmitter to your site and powered up; things like delivery, building modifications to get the unit through the door (or the roof), forklift or crane rental, changes in electrical service and even changes in the building's AC requirements. Transmitter manufacturers can be helpful in providing information relative to these costs; they have been through it many times at a variety of sites.

Other issues such as RF plumbing and transmitter cooling must also be considered. These will vary from installation to installation. They will also be different if the new transmitter is a replacement for an old unit or will operate as the primary with the old transmitter as a backup. In the latter case, some switch-over equipment needs to be considered. If this is a replacement, will the changeover result in any off-air time?

• **Transmitter efficiency:** The efficiency calculation provided by manufacturers may only reflect the efficiency of the final stage. What you need to determine is total electrical load relative to the new transmitter. This includes the cost of running the transmitter, pumps if it's liquid cooled, or blowers if it's air cooled, building air conditioners, if needed, and any other devices, such as monitoring systems, that are part of the new transmitter package. Getting a

handle on these costs may be difficult, but like installation costs, the transmitter manufacturers can help.

• **Maintenance costs:** Good preventive maintenance will cost less than corrective maintenance (see "Transmission & Distribution," on p. 48 of this issue). Much of the reason for this is that problems can be caught and dealt with before major damage results. For example, a small leak in a coolant line resulting from a loose clamp can be corrected by tightening the clamp. If the leak increases and the coolant floods the power supply, the off-air time and repair costs will be significant. Preventive maintenance schedules should

include inspection lists, and a timetable for replacement of significant items, such as blowers, PAs and other items affected by time and use. You will also want to determine schedules (both maintenance and cost) for support equipment, such as coolant pumps, heat exchanger motors, AC units, etc. All of these need to be included in maintenance costs as do labor costs for the time required. Finally, many manufacturers have a suggested spare-parts kit. Consider buying the kit along with the transmitter.

• **Residual value:** In light of the FCC rulings, transmitters that can't be modified for use with DTV may have little residual value. DTV-capable transmitters, however, should have some value when they are retired. Speak with the various brokers to determine some approximate values. If all else fails, assume your new transmitter will be worthless at the end of its tour of duty in your facility — that way if you get anything out of it, it's extra.

It has been my experience that the additional cost of a high-quality product is more than offset by reduced maintenance and downtime over the product's life. In the end, you have to decide how much those factors are worth, because you, or your successors, will be the one at the transmitter site at two in the morning — skinning knuckles and shedding blood — not the corporate accountant or the GM. ■

***You have to decide
how much those
factors are worth,
because you, or
your successors, will
be the one at the
transmitter site
at two in the
morning — skinning
knuckles and
shedding blood —
not the corporate
accountant or
the GM.***

Transmission-line trade-offs for DTV

How to feed more power up the same line.

By Bob Leonard





One of the biggest concerns expressed by broadcast engineers at NAB '98 was the constraints imposed by their existing tower on their ability to add DTV capability. Often, it's not the DTV antenna that causes the problem with wind-loading, but the required second run of transmission line that pushes the tower over its load limit.

One approach, of course, is to build a new tower. Tower reinforcing and augmentation services are also available. If these aren't practical, there may be a third option for engineers willing to examine how the actual power handling capabilities of transmission lines are rated. How? First, by understanding the safety factors manufacturers use, and second, using this knowledge to push the envelope and install a smaller line.

This path isn't for everyone, as it may void your transmission line warranty, but all engineering choices involve trade-offs between performance and costs. After looking at the facts, you might well conclude that intentionally running the line so hot that you have to replace it in five years at your own expense is preferable to not broadcasting at all. Besides, the simulcast period won't last forever, and then you'll only need one run of feedline on that tower.

Transmission-line choices

There are three basic transmission line options: waveguide, rigid coaxial line and flexible coax. The windload of waveguide depends on its shape (rectangular or circular) and size, and its size depends on your channel assignment. In all but a few cases, there is only one size of waveguide available for your DTV channel; if its windload is too high, you must use coaxial line. Manufacturer's safety factors are generally higher for rigid coax than for coaxial cable to allow for the possible effects of fine matchers, tuning slugs, etc., so rigid coax and cable will be considered separately. You'll need to pay attention to *average power* handling capability if you will be using the line for broadcasting a single channel, but if you plan to multiplex several channels, you must also consider *peak-power* capability.

The power handling capabilities of coaxial lines are based on two factors: maximum peak power (related to the maximum voltage gradient that can safely be present) and maximum average power, which is determined by the allowable temperature rise of the inner conductor. Average power is the most critical, so let's consider it first.

Average power

The average power rating is determined by the amount of heat created due to line losses. Because the temperature rise on the inner conductor is greater than on the outer conductor, this rating is based on the maximum allowable inner conduc-

tor temperature. For conventional rigid coax sections, the inner conductors are connected by sliding bullet-type connection points. Field experience has shown that — barring improper installation or damage — the typical failure mode is burnout of a bullet from chronic excessive heating. Therefore, for rating purposes, manufacturers select an inner conductor temperature that they feel will result in an acceptable service life. For coaxial cable, which is continuous, heat and related temperature rise are primarily limited by the safe, long-term performance of the dielectric material used to support the inner conductor inside the outer conductor.

If we allow the inner conductor to reach a temperature of 100°C with an ambient temperature of 40°C, as assumed by several rigid-line manufacturers and typical for polyethylene dielectric coaxial cable, then the inner conductor temperature will rise 60°C above ambient. The average power rating can then be calculated from the following equation:

$$P_{avg} = \frac{16.380 * \sigma * D_{OD}}{M_{\alpha} * \alpha} \text{ watts}$$

Equation 1

where

- P_{avg} = average power rating
- D_{OD} = outer conductor outside diameter, in.
- σ = heat transfer coefficient of outer conductor, watts/in², for 60°C rise of inner conductor temperature, per manufacturer's data
- M_{α} = correction factor for attenuation (relative to 20°C), equation 2
- α = attenuation constant, dB/100' at 20°C, per manufacturer's data at channel of interest

One area not normally taken into account is the actual temperature of the inner conductor during operation; the higher inner conductor temperature at rated power results in *higher* attenuation values and consequently lower average power levels for the specified inner conductor temperature. The correction factor for attenuation (M_{α}) is:

$$M_{\alpha} = \sqrt{1 + \sigma_o (T_i - T_o)}$$

Equation 2

where

- T_i = inner conductor temperature, °C
- T_o = inner conductor temperature at standard rating, °C
- σ_o = temperature coefficient of resistance at standard rating

For copper conductors and a standard temperature rating

Transmission-line trade-offs for DTV

for attenuation of 20°C, $\sigma_0 = 0.00393/^\circ\text{C}$. Therefore, if the average power rating is based on an inner conductor temperature of 100°C, during operation at rated power, the attenuation will increase by a factor of 1.146 over its value at 20°C. This calculation isn't typically used in system analysis, but should be considered for marginal DTV configurations.

When Equation 1 is solved using the manufacturer's published attenuation data, P_{avg} may come out slightly different from the published average power rating due to rounding of the attenuation constant. If the difference seen is too large to be accounted for by rounding errors, verify that the correct D_{OD} was used (two actual diameters are in common use for each nominal size — these are given in manufacturer's catalogs) and check to see if the manufacturer included the correction factor for attenuation.

Peak power

As mentioned, the peak power rating is the maximum amount of power that the manufacturer considers safe to apply to the transmission line. It is derived from the maximum voltage gradient between the inner and outer conductors.

The peak power rating, P_{pk} , can be calculated:

$$P_{\text{pk}} = \left(\frac{E_p * 0.707 * 0.7}{SF} \right)^2 \frac{1}{Z_0} \text{ watts}$$

Equation 3

where

E_p is the DC test voltage set by the manufacturer, set at approximately 35% of the theoretical value derived from the field-strength equation.

For most installations, the peak power rating will not be the limiting factor as it is typically much higher than a single transmitter system can generate. A primary concern will be for multiple channel installations where two or more signals are combined in the same transmission line. If the peak voltages from multiple signals of equal power add together in phase, the equivalent peak power rises as the square of the number of carriers. In this case, review voltage

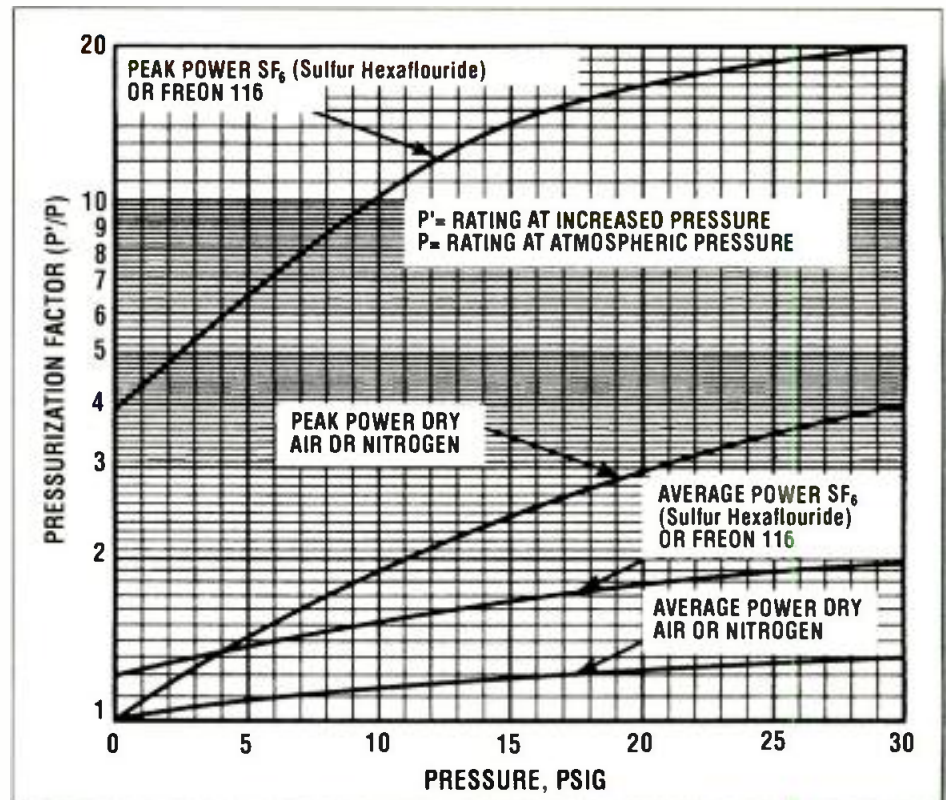


Figure 1. Pressurization factors, 50Ω line. It's easy to pump more through your line, just use more pressure, but, be careful; the loss of pressure or the use of SF_6 gas or Freon 116 carry their own operational cost penalties.

levels and peak power rating before specifying the transmission line.

Manufacturers' ratings

Some manufacturers (Andrew Corporation and MYAT Inc., to name two) published new average and peak-power

ratings for their transmission lines in 1998, so be sure you have the latest data. One thing to watch out for is the standard rating conditions used by each manufacturer, which affect average power rating. Everyone assumes a VSWR of 1.0, an ambient temperature of 40°C


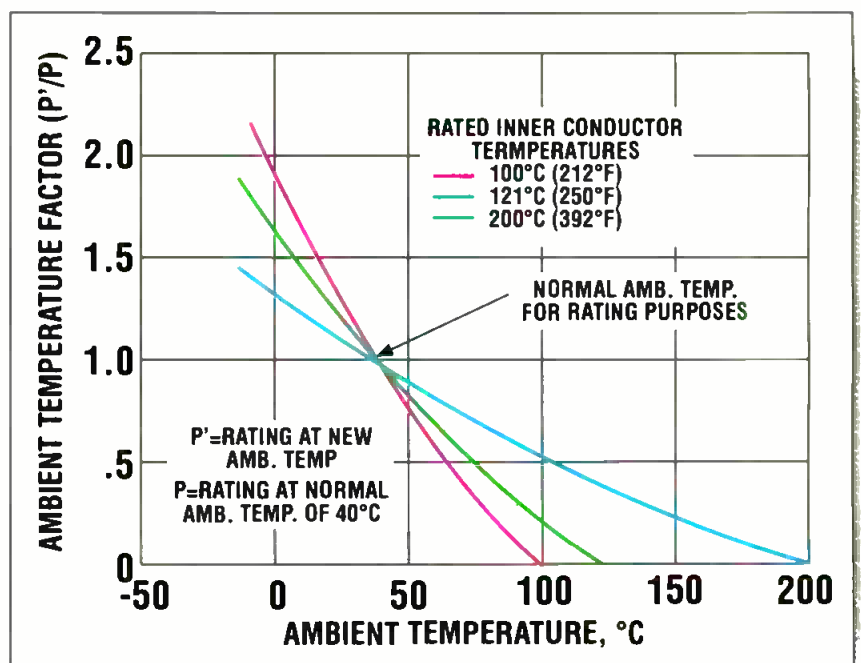


Figure 2. Variation of average power rating with ambient temperature. For cold climates, additional uprating is possible. However, if you're located in a moderate climate where the temperature may exceed 40°C (104°F), derate accordingly.

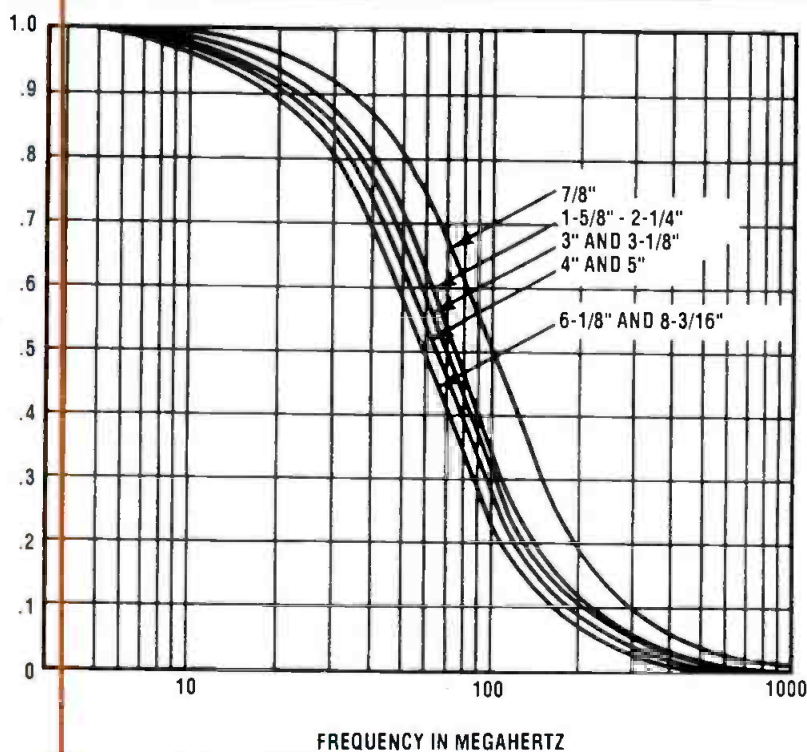

3. Derating factor for average power due to VSWR. High VSWR reduces the power-handling capability of transmission lines.

and no solar load, but three inner conductor temperature conditions — 100°C (212°F), 121°C (250°F) and 120°C (248°F) — pressure conditions — atmospheric and 15psig — have been used by various manufacturers. The higher the inner conductor temperature allowed, the higher the average power rating for the line will be, other things being equal. Higher pressure also increased peak and average power.

of this, long-term operation of coaxial lines at elevated temperatures is not recommended.

- **Uprating average power for higher inner conductor temperature.** As mentioned, manufacturers rate their rigid lines for average power by using different inner conductor temperatures. When the inner conductor is allowed to run

hotter than 100°C, more heat is transferred. The increase in allowable average power follows the same curve for all diameters of 50Ω and 75Ω line.

The uprating factor, P'/P , is 1.04 for an inner conductor temperature of 102°C and 1.38 for an inner conductor temperature of 120°C. If you elect to run the line at one of these higher temperatures, uprate a line rated at 100°C by multiplying the manufacturer's average power rating by the P'/P factor and a line rated at 102°C by the P'/P factor for the new temperature divided by 1.04 (for 120°C, the P'/P factor = 1.33).

A cautionary note: Transmission line that is rated by the manufacturer for operation at 120°C inner conductor temperature has recommended cutback dimensions appropriate for this temperature. If line rated at a lower temperature is to be run at 120°C, or if 120° rated line is to be connected to any existing run (in-building, etc.), cutback dimensions must be increased accordingly, unless you are using a thermally-compensated line with a bellows or corrugated inner conductor, in which case the bullet never moves or is absent entirely. If not sure what dimensions to use, check with the manufacturer.

- **Uprating for increased line pressure and SF₆ gas.** Nearly every manufacturer rates its line for average and peak power at atmospheric pressure. However, be-

Uprating for rigid coax

The average power rating for a safety factor per se, depends on how much bullet associated travel you are allowed. The usual failure mode for bullet-type coaxial lines is bullet from overheating. The station signs off and on after the inner conductor, the bullet will travel each time it increases the amount of rubbing or watchband spring, contact pressure and acceleration of metallic particles. Eventually, enough metal-to-metal contact causes contact melting and line burnout. Because

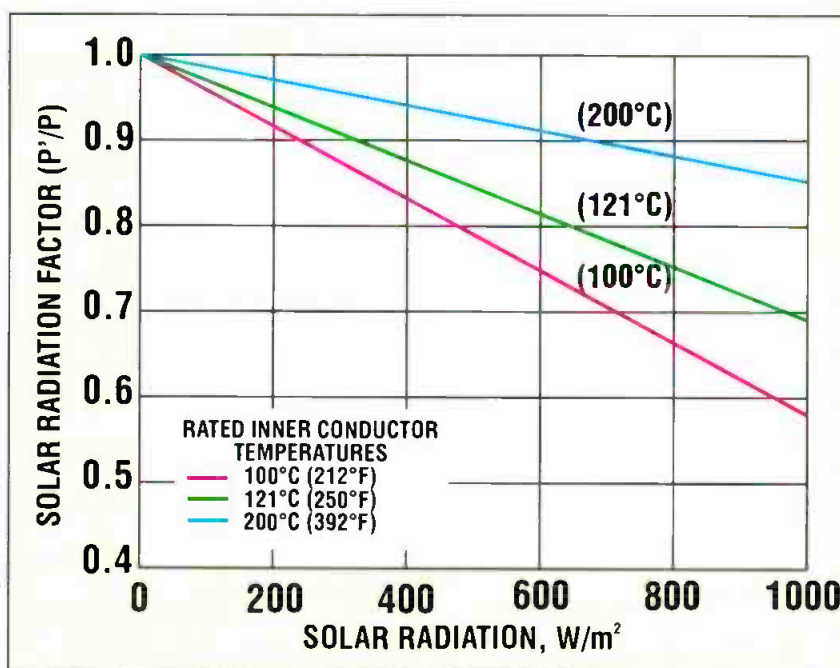


Figure 4. Variation of average power rating with intensity of direct solar radiation. In sunny climates, the bright sun can result in additional line heating, reducing its power-handling capability.

Transmission-line trade-offs for DTV

cause one manufacturer recently published a bulletin including a standard condition of 15psig, check to see what condition is being assumed before uprating. Increasing pressure inside the line increases both the average power and peak power rating as shown in

UPRATING AVERAGE POWER BY INCREASING LINE PRESSURE		
PRESSURE (psig)	P'/P FACTOR, 50 Ohm LINE	P'/P FACTOR, 75 Ohm LINE
0	1.00	1.00
5	1.09	1.08
10	1.16	1.15
15	1.21	1.22
20	1.26	1.28
25	1.31	1.33

Table 1. Average power uprating factors for pressurization with dry air or nitrogen. Increased pressure results in more power-handling capability.

Figure 2 for 50Ω line. By far the biggest improvement is for peak power, but average power also benefits. When the line will be pressurized with dry air or nitrogen, the uprated average power may be calculated from the rating factors provided in Table 1. Using sulfur hexafluoride (SF₆) as a pressurization gas increases average power ratings substantially but this is rarely done anymore because of personnel safety issues and added expense. If SF₆ is an option for you, estimate the P'/P factor from Figure 1.

Warning: Any dense gas can displace air and cause asphyxiation, and voltage breakdown in sulfur hexafluoride can create toxic oxides of fluorine.

- **Uprating/derating average power for lower ambient temperature.** If the ambient temperature for the antenna site is not expected to reach the rating temperature of 40°C (104°F), a further uprating can be made. This is shown graphically in Figure 2. However, if the temperature may *exceed* 40°C, you must derate the adjusted average power similarly.

- **Uprating average power for special emissive coatings.** Another trick that can be done to improve average power capacity is to paint the outside of the outer conductor with high emissivity white paint. (White is required to min-

imize solar absorptivity.) A total emissivity of 0.8 to 0.95 is achievable, compared with 0.04 to 0.07 for bright copper. However, once the copper oxidizes, its emissivity rises to above 0.8. If we assume that we can uniformly coat the outer conductor with paint having a total emissivity of 0.85 and a solar absorptivity of 0.30, average power can be

further uprated by 28% for 50Ω line or 23% for 75Ω line. This technique has been used successfully for transmission line for short-wave stations in rural locations but obviously carries some risk in areas subject to particulate or acid pollution. If this is the only way to get on the air, contact a qualified heat transfer consultant for appropriate emissivity and absorptivity values for various coatings and contact the coating manufacturer for recommended maintenance interval.

A variation of this technique is a new transmission line introduced at NAB '98 that uses a proprietary process to improve the emissivity of the inside of the outer conductor and the outside of the inner conductor. The manufacturer has given no details as to the nature, emissivity or permanence of the treatment, so it is not possible to discuss it. If considering use of this rigid line, compare it with standard line under the same rating conditions to determine what benefits to expect.

- **Uprating peak power by reducing safety factor.** For peak power, uprating depends on how much of the manufacturer's safety factor you are willing to use up. Equation 3 shows that the rigid-line safety factor of two results in 2² in the denominator or a total safety factor of four on peak power. Even this is conservative, because the numerator includes the production test voltage, E_p , which is set at only 35% of its theoretical value. In other words, the actual peak power capacity of a perfect line is 11.4 times higher than rated.

So why are rigid-line manufacturers so

conservative with their peak power ratings? First, manufacturing a perfect line is impossible; the tubing used is not exactly straight, and it always has some allowable warp. There is a certain amount of inner conductor sag in horizontal runs. Elbows are required. Moisture may enter the line. Tuning slugs or fine matcher screws may be incorporated after manufacture to improve system VSWR. Finally, voltage breakdown is a highly variable phenomenon that can occur at widely different values, depending on tiny flaws, such as scratches and dust particles.

Still, a safety factor of 11.4 is probably overkill and relates more to decades-old tradition in the broadcast industry than to hard engineering requirements. Slightly exceeding published peak-power ratings can probably be done without undue risk. Remember, though, that a single failure due to arc-over typically causes permanent damage to the transmission line and loss of signal.

The several uprating factors discussed are essentially independent and can be combined to determine the adjusted power ratings for your situation. But you can't stop here. In the past, broadcast engineers have tended to be rather casual about figuring *deratings* for transmission line, because they allowed plenty of operating margin. If you decide to take your line up to the uttermost limit, though, examine every derating factor.

- **Derating the power-handling capability.** The first step is to look at average and peak power based on modulation and VSWR. The *uprated average power* rating must be derated for VSWR using the derating factor, D.F.:

$$D.F. = \frac{(VSWR)^2 + 1}{2(VSWR)} + \frac{F^1 (VSWR)^2 - 1}{2(VSWR)}$$

Equation 5

F^1 = frequency and line size factor from Figure 3.

The calculation of derating factor is conservative in that it assumes that all reflected power is re-reflected at the transmitter and that absorption of the reflected signal by the attenuation of the line is small. Select F^1 from the applicable curve in Figure 4, calculate D.F., and *divide* into uprated average power.

Uprated peak power must also be derated for the effects of modulation and VSWR. These deratings are calculated as follows:

DTV:

$$P_{\max} < \frac{P_{pk}}{VSWR}$$

Equation 5

Analog TV:

$$P_{\max} < \frac{P_{pk}}{(1 + AU + 2\sqrt{AU}) * VSWR}$$

Equation 6

where

$P_{\max}$ = derated maximum peak power

M = amplitude modulation index (100% = 1)

AU = aural to visual ratio (20% aural: AU = 0.2)

Note: For DTV, $P_{\max}$ should be compared to the +6 dB peak power levels for 8VSB and not the average power of the signal.

- Derating average power for direct solar radiation. Transmission line exposed to direct solar radiation has reduced average power-handling capability due to the additional heat from the sun. The solar radiation derating factor, P'/P, is provided in Figure 4 for solar radiation, in W/m², incident *normal* to the transmission line. As a conservative estimate for moderate climates, an average radiation intensity of 300 W/m² can be used. For hot, dry climates, the solar radiation intensity can exceed 1,000 W/m² at the hottest time of the day. *Provided that absolute maximum temperatures are not exceeded*, the mean value over the day, which is a little less than 400 W/m², is more applicable for solar derating.

To be more precise, you need to look at expected mean solar radiation at the antenna site and the actual angle of incidence. For the United States, the National Meteorological Center has developed a map showing average daily direct normal solar radiation (see Figure 5). The data on this map is expressed in MJ/m²/day, so to convert to direct W/m², you need to multiply by 11.54; e.g.,

an area with an average daily radiation of 10 MJ/m² would have direct solar radiation of 115.4 W/m². Find your antenna site, note the radiation shown (taking the higher value of the lines encompassing your site) and — to be conservative — multiply by 11.54.

You can also reduce the solar load by a factor based on the actual angle of incidence. Your transmission line run will generally have two components, a horizontal run and a vertical run. The horizontal run will in fact receive radiation close to normal incidence if the sun is high in the sky, so you may elect to erect sunshields for it to increase power. In that case, only the vertical run will remain exposed. Estimate the worst-case elevation angle of the sun based on: 1) the latitude of the site, 2) the season, and 3) the time of day. Take the cosine of this angle of incidence, measured from the direction normal to the transmission line, and multiply it by the average daily direct normal solar radiation prior to converting to W/m².

Finally, read the solar radiation factor P'/P from Figure 4 for the inner conductor temperature that you plan to use (the 121°C curve is close enough for 120°C operation) and multiply this P'/P factor by adjusted average power.

- Derating peak and average power for altitude. A final derating — that for altitude — is done even more rarely. As mentioned, most manufacturers rate their rigid line for atmospheric pressure, and that means atmospheric pressure at sea level. This impact is more severe for peak power than for average power. Select the P'/P derating factors from Table 2 for the altitude above sea level, interpolating as necessary, and multiply by the adjusted average power and peak power ratings. Table 2 assumes nominal overpressure in the line, but in fact, you should have some excess pressure.

Coaxial cable

Though solid and foam dielectric ca-

bles are available, most DTV applications will require the use of air dielectric coaxial cable to carry enough power, so air cable is assumed here. Standard rating conditions for cable are similar to those for rigid coaxial line, except that the safety factor on peak power is 2 instead of 4. The main difference is the variety of dielectric materials used: polyethylene, polyolefin and fluoropolymer. The latter two materials have higher operating temperatures and are used to increase the power rating of the cable. Generally, cables are rated for an inner conductor temperature of 100°C for polyethylene dielectric, 121°C for polyolefin, and 150°C for jacketed fluoropolymer (unjacketed fluoropolymer

DERATING AVERAGE POWER AND PEAK POWER FOR ALTITUDE

ALTITUDE, ft above sea level	P'/P AVERAGE POWER	P'/P PEAK POWER
0	1.00	1.00
5,000	0.92	0.83
8,000	0.87	0.73
10,500	0.84	0.66
15,000	0.78	0.55

Table 2. Average power and peak-power derating factors based on altitude. The higher the altitude, the lower the power-handling capability of a transmission line.

dielectric cables, not suitable for TV main feeders, are rated at 200°C). However, one manufacturer published a bulletin last year using average power ratings based on an inner conductor temperature of 115°C for polyethylene dielectric cables, so be sure to verify the standard rating conditions before doing any uprating.

- Uprating average and peak power for higher inner conductor temperature, increased pressure, SF₆ gas and lower ambient temperature. Uprating average power depends on how much shortening of cable life you can tolerate. The average power rating for a cable is set so as to limit the inner conductor temperature to a level that allows a satisfactory life of 20 years (typically). Clearly, running a cable hot enough to cause melting — or even softening — of the dielectric is unacceptable. While the polyethylene materials used in coaxial cables have melting points around 130°C (266°F), the operating temperature needs to be significantly lower than this to limit the

Transmission-line trade-offs for DTV

long-term degradation of the dielectric by oxidation. Even with less than 1% oxygen in the atmosphere, dielectric materials react chemically with it at elevated temperatures, ultimately degrading their electrical and mechanical properties. Dielectric loss increases, and the plastic turns brittle; this can lead to decentering of the inner conductor and line burn-out. Like all chemical reactions, the rate increases substantially with quite modest temperature increases. Typically, the rate of oxidative degradation increases, and lifetime decreases by about a factor of two for each rise in temperature of 10°C (50°F).

So an increase in inner conductor temperature will accelerate oxidation of the dielectric and shorten cable life. You can estimate this effect for a polyethylene dielectric cable from Figure 6. As can be

seen, for a maximum inner conductor temperature of 100°C, oxidation proceeds slowly enough to assure a cable life of approximately 20 years. However, with the inner conductor temperature raised only to 115°C, cable life is cut by almost two-thirds, to 7.1 years. If

Intentionally running the line so hot that you have to replace it in five years may be preferable to not broadcasting at all.

you find five years acceptable, you may be able to crank the power up so that the inner conductor runs at 120°C (however, this is getting into the softening area, so stopping at 115°C is probably a good idea).

Polyolefin dielectric cables should probably be left alone, but fluoropolymer dielectric cables have plenty of margin left at their rating temperature

of 150°C. We tested a sample of our high-power fluoropolymer dielectric five-inch cable at an RF average power of 3318.9kW (over 196% of rated peak power) at 0.5MHz and at 60.3kW (112.5% of rated average power) at 700MHz, Channel 52, without damage to the cable or its jacket. (Note: These RF average power levels are typically 10–20% higher than average powers calculated using a 60Hz test.)

Unjacketed fluoropolymer dielectric cables are actually rated for an inner conductor temperature of 200°C. The limiting factor is bullet travel, rather than temperature; while coaxial cable doesn't have the multiple failure points of rigid coax, there may be rigid line connectors with bullets somewhere in the transmission path (bullets in the connectors for the cable itself should not move because of the cable's corrugations). Estimate the increased power to be obtained from a higher inner conduc-

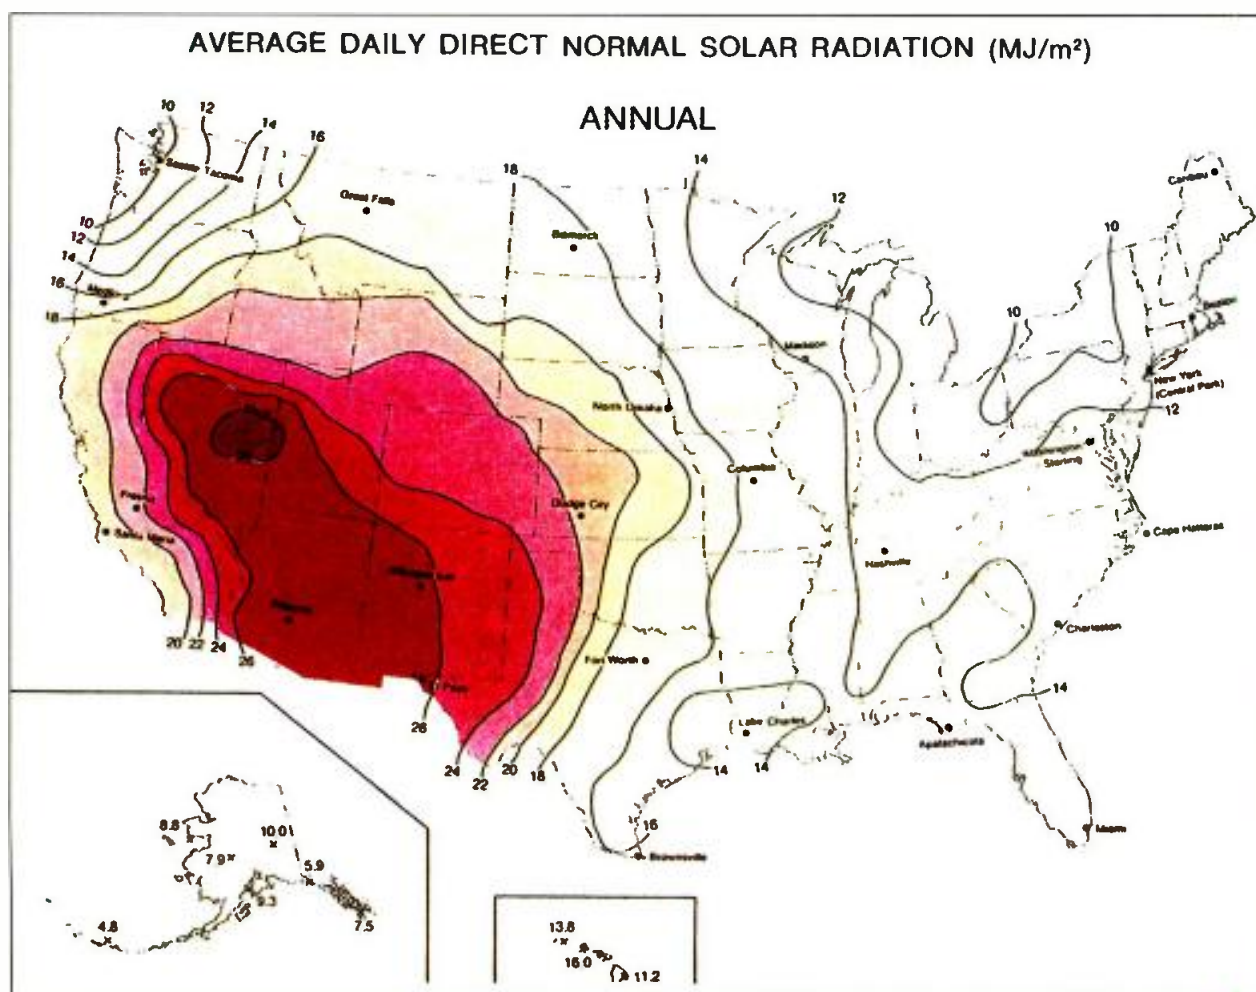


Figure 5. Average daily direct normal solar radiation (MJ/m²). Map courtesy of National Meteorological Center, Washington, D.C.

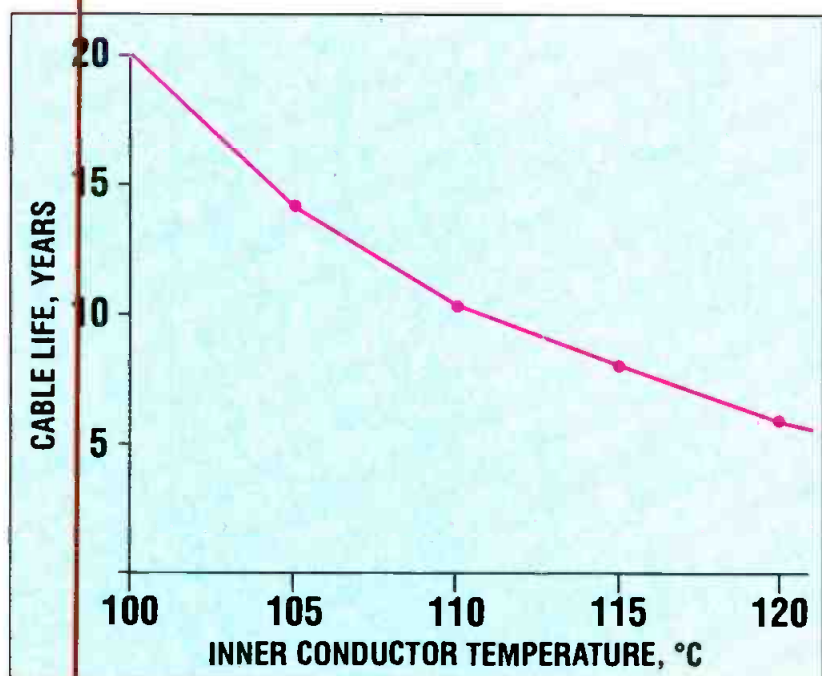


Figure 6. Approximate reduction in cable life based on increased inner conductor temperature. Within some limits, the choice comes down to a trade-off between shortened life and more power-handling capability.

tor temperature by taking the increase over ambient temperature at the new inner conductor temperature divided by the increase over ambient at the rating temperature.

The steps for uprating for increased line pressure, SF₆ gas and lower ambient temperature are identical to those discussed in the rigid line section. See above for guidance on calculating these uprating factors for coax.

- **Uprating peak power by reducing safety factor.** Uprating for peak power depends on how much of the manufacturer's safety factor you are willing to use up. For coaxial cable, however, the peak power safety factor is only two, and the production test voltage is slightly higher than 35% for some cable sizes, so the total safety factor is closer to 5 than 11.4. But experience shows that slightly exceeding published peak power ratings is not too risky. If you overdo it, though, you'll destroy the entire feeder run.

- **Derating for modulation and VSWR, solar radiation, and altitude.** You'll need to derate your power capacity estimates for these factors just as for rigid line. See the sections on rigid line for guidance in calculating the derating factors. You will use Figures 4, 5 and 6 along with equations 5, 6 and 7 to calculate the result.

Is it worth it?

Let's take a real-life DTV example and see if all this engineering knowledge can get us out of trouble. Our example station is located in upstate New York with an ERP for Channel 51, 693.25MHz, of 1MW. We have to install a 25 gain antenna, so we must deliver 40kW to it. We think that we can achieve a VSWR of 1.05. Our transmission line run is 600 feet long total. If it is 70% efficient, the transmitter must deliver 57.1kW into it. Upon checking manufacturer's ratings, this looks like a job for 6¹/₈-inch, 50Ω rigid line.

The problem is our tower will never hold another run of line this big. So let's see if 3¹/₈-inch, 50Ω line might work. It meets the 70% efficiency requirement under rated conditions. Because this line will carry only one channel, peak power is not an issue. The average power rating is a dangerously low 18.6kW for an inner conductor temperature of 100°C and atmospheric pressure.

We'll raise the inner conductor temperature to 120°C, pressurize with 25psig of sulfur hexafluoride, assume an ambient temperature of no more than 35°C, shield the horizontal run and paint the vertical run white. This

puffs our 18.6kW all the way up to 63.96kW, a good start. For 693.25MHz, the F₁ factor is practically zero, so the D.F. derating factor for a VSWR of 1.05 is only 1.0012, cutting average power to 63.88kW. Average daily direct solar radiation is just 10 MJ/m² or 115.4W/m². Applying the cosine of the latitude, about 0.7355, reduces this to 85W/m². This gives us a P/P factor of 0.97 and a derated value of 61.96kW. Finally, our altitude is around 2,500 feet above sea level, so we'll subtract another 4% and arrive at an adjusted average power rating of 59.5kW — higher than needed. (Ignored in this example is the effect of higher attenuation at the hotter temperature on efficiency, that you would need to calculate.)

Does this mean that you can go around substituting three-inch line for six-inch line? Probably not, because your conditions aren't likely to be as favorable as these. Also, any change in operating conditions such as pressure loss, increased VSWR, wind damage or unreasonable heat can result in total failure of the line. Because this means off-air time and damage repair expenses, you probably wouldn't care to push the limits quite this far. But if big line just won't work, you may be able to use 4¹/₁₆-inch rigid line or large diameter coaxial cables — under less severe conditions — in order to get on the air during the first few years of DTV implementation. ■

Cautionary note: Operating a broadcast transmission line above its rated power value may void the warranty. Contact the manufacturer for further information. Neither the author, Andrew Corporation, nor Broadcast Engineering shall be responsible for problems arising from use of the information presented in this article.

Acknowledgments: The author would like to thank Kerry Cozad, Andres Gonzalez, Hugh Nudd and Tom Mikolajewski of Andrew Corporation; and Phil Cindrich, Don Aves and Steve Kolvek of MYAT Inc. for their valuable help in the preparation of this article.

Bob Leonard is product manager, broadcast transmission-line products, at Andrew Corporation, Orland Park, IL. Readers may obtain additional information in the form of two detailed technical papers, "Selecting a Transmission Line for Your Broadcast System," and "New Attenuation and Power Ratings for Broadcast Transmission Lines," by calling Andrew at 1-800-255-1479, extension 372; ask for SP50115 and SP50177.

Understanding HD/SD conversion


Get ready to convert —
almost everything!

By Kenneth Hunold

Nov. 1 is looming large on the horizon for engineers and managers at many TV stations and the networks. That is the date stations in the top 10 markets have volunteered to be on the air broadcasting digital TV signals.

According to most plans, at first there will be only a few hours per week of programming originating in an HD format. What about the rest of the broadcast day? Much of what is broadcast on the NTSC channels will require upconversion to an HD scan rate for broadcast as HD programming.

Photo: Leading program suppliers, like DirecTV, are moving quickly to provide their customers with HD and widescreen services. This photo shows the DirecTV network monitoring center that provides simultaneous signal monitoring and analysis for more than 375 program channels. In the upper right corner, note the use of 16:9 professional monitors. (Facility built by and photo courtesy of Communications Engineering Inc., Newington, VA.)

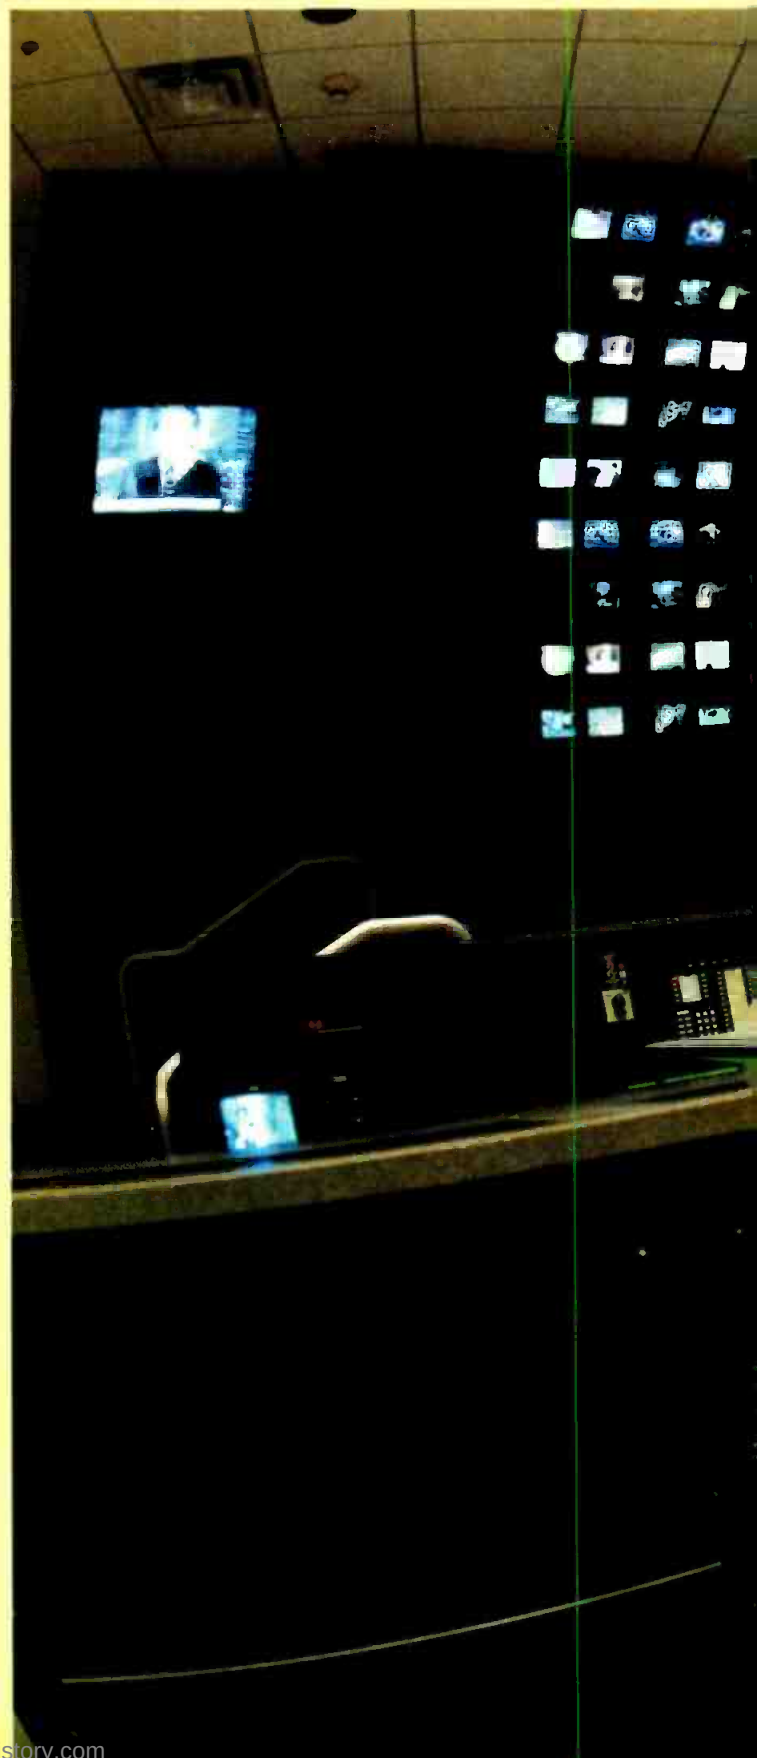

In the future, what about those hours that are being originated in high definition? Surely most HD originated material will end up being broadcast on the NTSC station, requiring another type of conversion.

HDTV doublespeak

Perhaps the first thing to discuss is not technology, but terminology. What are we going to call these conversion devices? It is almost intuitive that converting from a

scanning rate with less scanning lines to one with more scanning lines would be called upconversion, while converting from a format with more scanning lines to one with less would be downconversion. Although technically correct, this explanation can raise some political issues. On this continent, we do not refer to the conversion from 525-line NTSC to 625-line PAL as upconversion. Nor do we consider converting from 625-line to 525-line downconversion. In the interest of political correctness, let's try to



Understanding HD/SD conversion

set some protocols.

Conversions from any of the existing SD line rates (i.e., 525 and 625 total scan lines) to any of the new HD line rates (i.e., 720 or 1080 active scan lines) should be referred to as upconversion. The infamous ATSC Table 3 can help us here. In the interest of avoiding a fight, devices that convert between (or among) HD formats should be called cross converters or simply converters.

Interpolation process

These complex conversions, along with some other more subtle ones, are not trivial. A tremendous amount of engineering effort goes into developing high-end HDTV converters. The most obvious function of upconversion is to increase the number of scanning lines in an image. The almost generic term — line doubler — refers to a device that merely repeats every line to reduce the visible scanning structure on large displays. Most modern upconverters use a more elaborate process of interpolating between scan lines to approximate the image that would have been between the scan lines. This is more in keeping with the philosophy of attempting to display a 525-line image as if it were scanned at a higher line rate. Which is,

after all, what we are attempting to do.

This interpolation is similar to what is done in a 525- to 625-line standards converter. In fact, an HD converter can be thought of as a standards converter on steroids. In both cases, an output scan line must be synthesized from varying portions of the input lines adjacent to it. Depending on the spatial position of the output line relative to the input lines, the output line will look more like the input line above or below it. It could happen that the output line exactly overlaps the input line. Then the solution is

frame must be de-interlaced to return to the original scene that was captured. If the two interlaced fields are combined, an artifact occurs, caused by the temporal offset between the fields. A rigorous treatment of the issues surrounding interlace and progressive scanning is outside the scope of this article, but suffice it to say that building a good de-interlacer is not a trivial process. It is possible that, when converting from interlaced standard definition to interlaced high definition, the odd and even interlaced fields could be interpolated separately, but that ignores the advantage of having the in-between scan lines available in the next field (even with a possible temporal offset).

Once the original frame is recreated, you can theoretically compute the new output frame. But, of course, there is more. Most SD video formats have a 4:3 aspect ratio. All of the HD formats have the wider 16:9 aspect ratio. Artistic decisions must be made about how these two images will be processed. The term aspect ratio converter is a misnomer because aspect ratios cannot be converted. The best that can be done is to accommodate one aspect ratio on another.

Many schemes have been devised to fill a 16:9 frame with a 4:3 image (and vice versa). If true proportions are to be maintained (sometimes referred to

A high-definition converter can be thought of as a standards converter on steroids.

easier — the input line just needs to be passed to the output line (in addition to computing any changes in line length).

Interlacing and frame rates

Central to the issue of comparing input and output scanning functions is recreating the image that was originally scanned. This is where interlace scanning causes problems. In an interlaced system, a temporal difference exists between the two fields because they are not scanned at exactly the same time. To recreate the original scene, an interlaced

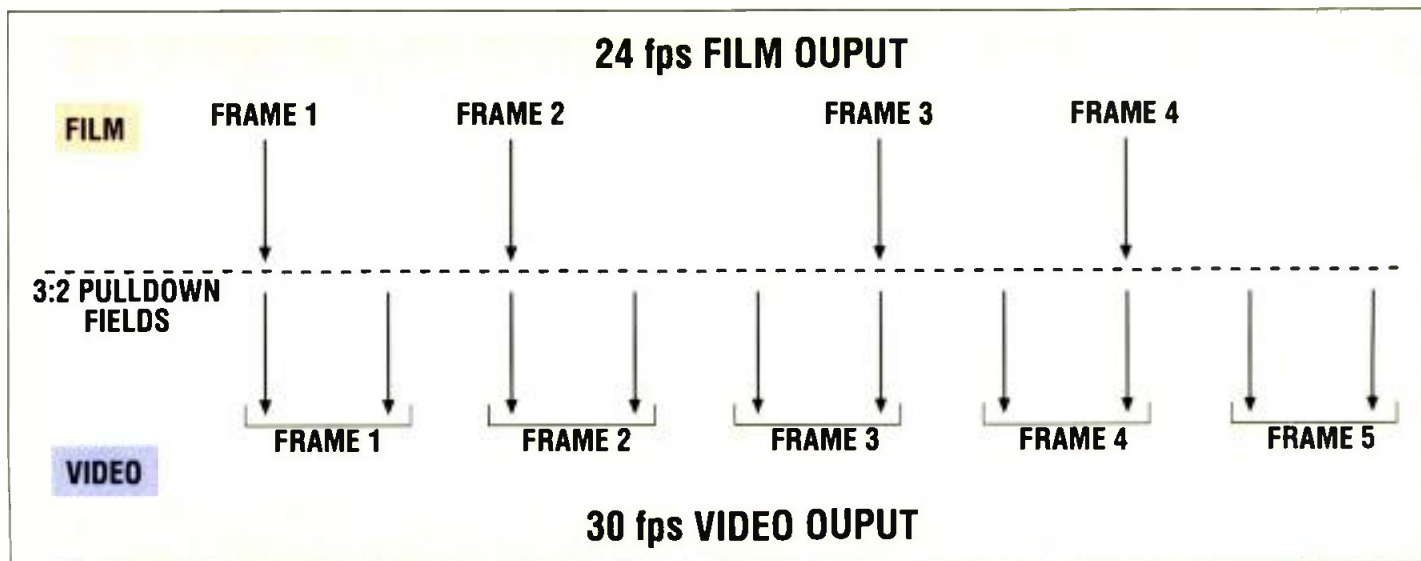


Figure1. Because the frame rates of film and video are not the same, a conversion must be made. The illustration shows how an input rate of film's rate of 24fps is converted to a video output rate of 30fps. The first film frame is held for three video fields and the second film frame is held for two video fields. The sequence is then repeated. This results in four frames of 24fps film producing five frames of 30fps video.



With a large infrastructure of NTSC and a November deadline, the networks are faced with a huge challenge in converting their facilities to HD in a short timeframe. Shown here is an NBC news control room in Washington, DC. Most stations will initially have to rely on NTSC-to-HD upconverters to generate high-definition signals. (The NBC facility built by and photo courtesy of Communications Engineering Inc., Newington, VA.)

as circularity), then the choices range from full height (with side curtains or panels) to full width (with the top and bottom of the image cropped). From the interpolation viewpoint, full height is preferred over full width because full width zooms the image up more, highlighting any interpolator errors as well as emphasizing the lower resolution of the SD source compared to other HD sources.

More for less

Can these images be enhanced or made to look better than they actually are? Within reason, yes, but with an emphasis on the phrase "within rea-

son." Why? Because the images actually aren't really any better. Processes similar to SD image enhancement can be performed, but often more choices of parameters exist. Remember that

HDTV uses different equations than NTSC to create luma and chroma values from RGB signals.

any enhancement will be magnified on a larger display along with the magnified image. This problem might also explain why greatly enhanced SD images do not convert well to HD. What

was thought to be subtle enhancement on an SD image might become objectionable when displayed in HD.

Just as with a camera-originated picture, some compromises must be made based on image content. If the converter has an auto-setting, it is a good place to start. Artistic judgment must be exercised. If you have a video person or a maintenance person who is good at matching and adjusting cameras, let him

adjust any enhancement controls while viewing the output on a good HD monitor.

If the converter is going to operate on a variety of video program types or will



What's not revealed is often most revealing

BY KARE ANDERSON

You never really know people until you see the choices they make. As a broadcast engineer, you've probably found that it's usually not the "technical" challenges but the "people" challenges that determine how well you can do your job. We instinctively pigeonhole people into categories to make the world more understandable, and then we're surprised when a co-worker exhibits a sudden vehemence about a new subject.

You can have fewer surprises, however, when you seek to understand others' less visible, underlying motives, and you may find easier, more satisfying ways of working with them.

Everyone has their own operating manual

To better understand people and find out how to inspire them to take positive action, learn to recognize their unstated hot buttons of high emotion, positive or negative. These are the major rules to a person's "operating manual" — what makes him or her run smoothly, bump into obstacles or simply get stuck. People act quickly and intensely to avoid what they fear. That's because our deepest gut instinct is to survive. We reflexively react to any danger.

To recognize a person's hot buttons, look for changes in their behavior as signals that you are on a hot topic of concern. Facial expression tells others how we feel, and our bodies suggest the intensity of our feelings. Look for the "vital signs" of increased excitement, such as dilated pupils, a higher or thinner voice, rapid blinking, flushed face, rapid and shallow breathing and avoidance of direct eye contact in someone who had looked you in the eye earlier in the conversation. In people who usually move and gesture little, look for rapid body movements. For people who tend to be more animated,

look for the times when they are moving less than usual.

In times of increased concern, women are more likely to move their hands and forearms more. When seated, men tend to show their feelings by twitching one foot when their legs are crossed. In general, in times of conflict or other kinds of tension, women tend to move and talk more; men tend to move and talk less. Psychiatrist Pierre Mornell



wrote a book about this phenomena called *Passive Men and Wild, Wild Women*.

Few people are aware of how dramatically bodies shut down in times of perceived crisis or unfamiliar situations. In times of fear or even mild discomfort, people have diminished hearing. In addition, their peripheral vision and their ability to taste can also decrease.

In "shut-down" situations, people hamper their ability to perform, and others may misinterpret their slowed reactions. You may see the pattern in someone else's hot buttons even though they do not perceive them. In the case of people who are close to you at home or work, it pays to recognize their

unstated warning signs — if you appear safe and familiar to people, they can be more open to hearing you.

Once you recognize what happens when people get upset, you can come closer to understanding their operating manuals. This understanding allows you to present your ideas in ways that address their concerns, either directly or indirectly. Thus, you can influence someone to take action to avoid a perceived danger.

Many times, we are not aware of our underlying fears or concerns. We can go through life in a trance, reacting to earlier patterns, especially negative experiences, without knowing that we are not acting in our best interests.

Questions tell more than answers

We are far more revealing by the questions we ask than the answers we give. We are taught to ask questions to show interest and learn more about another person, but we will learn more deeply and quickly when we get that person to ask us questions. How? Explain something that engages their interest so that they ask questions to learn more. Respond directly, but briefly, to their questions so they are in charge and ask follow-up questions. Note the direction that the other person's questions take.

On average, by the third question, you will know more about the nature of someone's deeper concern or interest than if you had taken charge. Why? Because you don't know what you don't know. Your line of questions will be based on your world view. Their line of questions will reveal their world view. ■

Kare Anderson is a speaker and author. Visit her web site at www.sayitbetter.com.

GENESIS

THE INTERFACE

SYSTEM

comprehensive
control
flexible
solution



Genesis is the most comprehensive range of innovative, high quality interfacing products available from one manufacturer. Currently, more than seventy products offer complete solutions for systems integration. Genesis can house Optical/ Analog/Digital/ Audio/Video interfaces within the same platform. This remarkable range includes...

- Digital Encoders
- Digital Decoders
- Video/Audio ADC's
- Video/Audio DAC's
- Audio/Video Multiplexers
- Audio/Video De-multiplexers
- Audio/Video Synchronisers
- Embedded Audio/Video Synchronisers
- Audio Compressors/Decompressors
- Fibre Optic Drivers/Receivers
- Audio AES Processors
- Data Embedders
- Digital Distribution Amplifiers
- Analog Video Distribution Amplifiers
- Analog Audio Distribution Amplifiers
- Audio/Video Monitoring Amplifiers

...and there's more. If you need control, alarms, inventory management, monitoring and diagnostics, including EDH then TACS (our Technical Assessment and Control System), provides the total integrated solution.

For more information on the Genesis Range and a complete Product Directory just call, fax or www.tekniche.com



CONVERTING THE WORLD

UK/Europe Tel +44 1483 728006 Fax +44 1483 770195
 USA (East) Tel +1 201 784 2288 Fax +1 201 784 3860
 & 1 800 TEKNICHE
 USA (West) Tel +1 818 955 9907 Fax +1 818 955 9908
 Hong Kong Tel +852 2776 0628 Fax +852 2776 0227
 Brazil Tel +55 21 622 1536 Fax +55 21 622 1825

Circle (45) on Free Info Card

Applied Technology

Tubes for DTV

BY GUY CLERC AND MICHEL LANGLOIS

The 1990s will go down in the history of television as marking the advent of digital broadcasting. Thanks to extensive work by many different people, modulation standards have been set, characterization methods defined and quality standards established.

At the same time, Thomson Tubes Electroniques of France has developed a new line of tubes specifically designed for DTV. These new tubes can also be used for analog broadcasts at up to 60kW in common amplification. Thomson Tubes Electroniques' IOTs and Diacrodes now offer the highest power and best linear performance on the market.

Without additional measurements, however, no currently available method allows us to transpose tube capabilities from the analog to the digital environment.

In the meantime, a consensus has emerged concerning the methods used to characterize digital signals. Today, it is possible to measure the intrinsic qualities of electron tubes for 8VSB operation. This article will show how engineers at Thomson Tubes Electroniques developed this approach, what it entails and the initial test results.

Component performance with 8VSB signals

Tube performance in both analog and digital mode is largely determined by two factors: amplitude linearity and phase linearity. Even though these two key parameters remain the same, the methods used to characterize analog and digital signals are radically different (see Table 1).

For analog signals, the sum of the visual + aural signals is imperfectly corrected during the sync pulse, which means this peak envelope power cannot be used as a reference to calculate

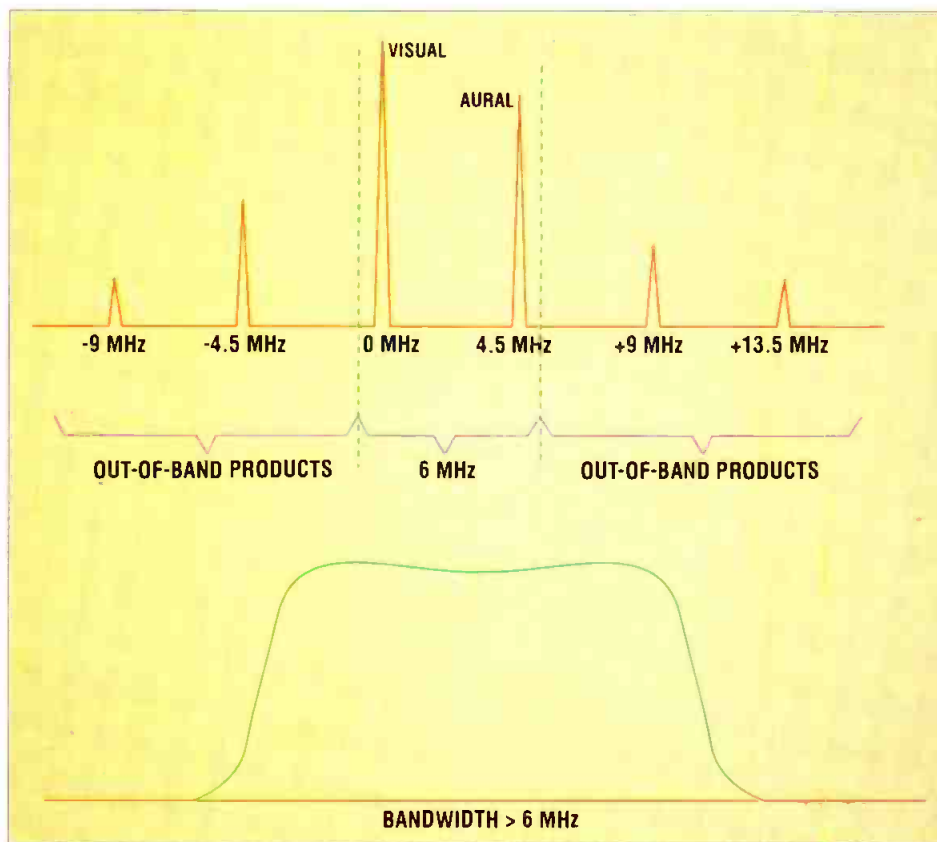


Figure 1. Typical analog measurements ignore the IM that occurs in adjacent channels because proper filtering can eliminate them.

the capabilities of a given component for digital operation.

In general, measurements of analog

signals do not take into account the visual and aural carrier intermodulation in adjacent channels (see Figure 1).

However, with digital signals, out-of-band intermodulation products create a spectrum that is in continuity with the desired spectrum (see Figure 2), making it hard to attenuate these signals. Measurements show how closely the quality of the out-of-band signal (shoulder height) depends on the three parameters that characterize the signal in the channel passband: EVM, SNR and peak/average power ratio.

Shoulder height is currently considered the reference measurement, because it is easy to use and to analyze. Other measurement methods are applied concurrent-


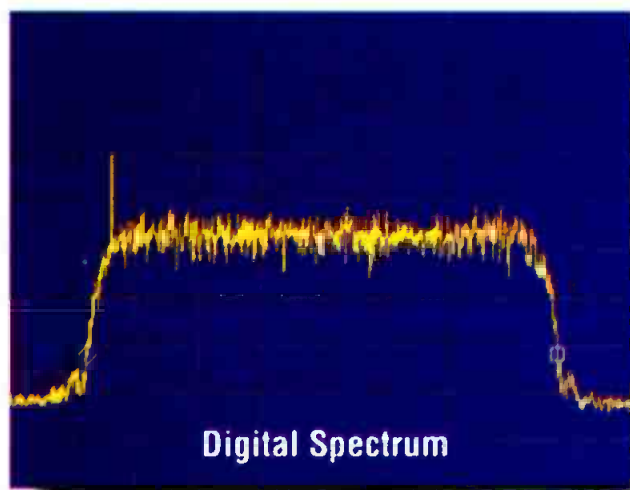


Figure 2. Shoulder height (DTV): With digital signals, out-of-band intermodulation products create a spectrum that is in continuity with the desired spectrum.

Add
\$50,000
Per Month
Income

"the TIME MACHINE"TM

Create Commercial Time

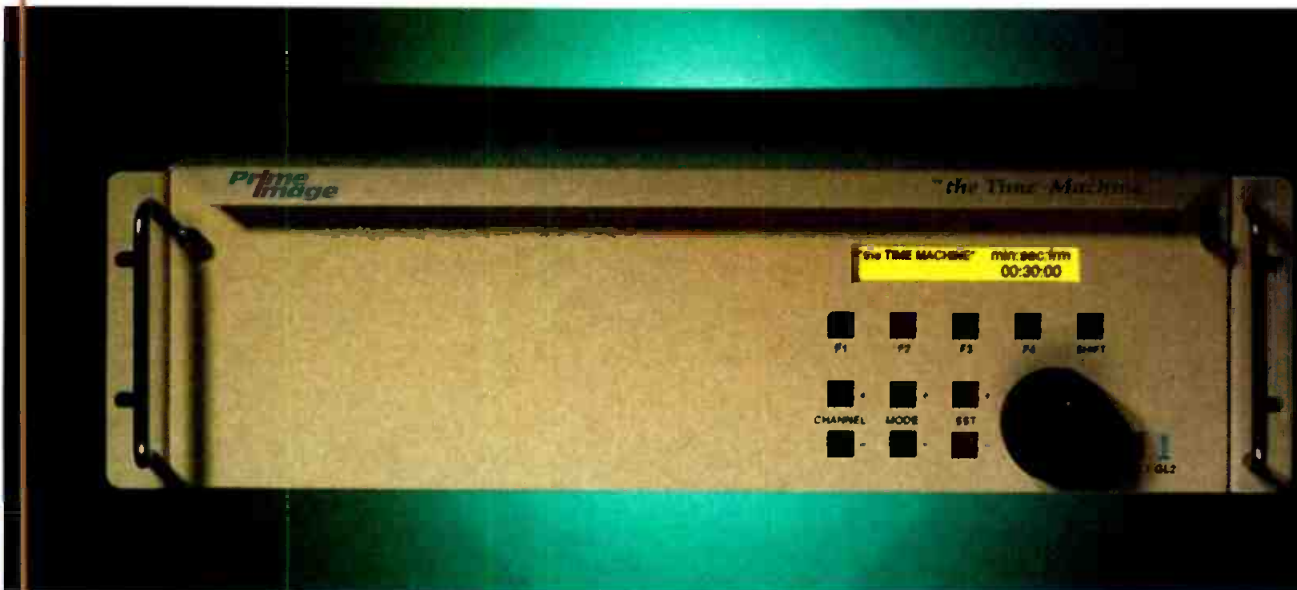

The Time Machine is a new, technological break through product, which reduces program time, to create commercial insertion time. It is a self contained, small 3U rack mountable unit which requires no data compression.

The Time Machine is capable of changing time without changing the pitch (frequency) of the video or audio programming. The Time Machine consists of a main frame which houses the memory and all of the electronics necessary for control of the video and audio-Time Machine storage. A maximum of

30 seconds of video and two channels of time reduction audio is available.

"the TIME MACHINE" **features include:**

- Edit down long programs
- Emergency news break with no program loss
- Adjustable time reduction
- No data compression
- Fully digital
- Solid State

Prime Image[®]

The Digital Video People

662 Giguere Court #C, San Jose, CA 95133 Tel (408)867-6519 Fax (408)926-7294 Service (408)926-5177
primeimagein@earthlink.net•www.primeimageinc.com

Prime Image Europe

Grain House, Mill Court, Great Shelford, Cambridge CB2 5LD, UK Tel (44) 1223 518 802
Fax (44) 1223 518 810 CompuServe 100546,3053

Circle (42) on Free Info Card


www.americanradiohistory.com

GOING FOR THE GOLD - NVISION Receives High Marks for its New eNVoy™ Series of Universal Digital Routing Switches

As a long time leader in the digital audio market, NVISION is bringing its 'customer driven' formula for success to the video market with the ENVOY series of digital video routers. Since 1989, this Grass Valley, California company has earned a solid reputation for providing high quality/high value digital audio, time code and data routers to the television industry.

NVISION routers typically solve problems that have been ignored by other manufacturers. As proof of this statement, NVISION routing switches can be found in almost all of the Hollywood post-production facilities, as well as in major network operation centers around the world, with the majority of these switches operating under other manufacturers' control systems - and the ENVOY should prove to be no exception.

With 1998 seeing the start of DTV transmissions to the home, broadcasting organizations need to build systems that can include multi-channel NTSC, HDTV and surround sound. To accommodate these immediate requirements, the industry needs equipment that has the flexibility to fit today's needs, without being outgrown tomorrow. NVISION has anticipated this need for operational flexibility and has designed the ENVOY series with this in mind.

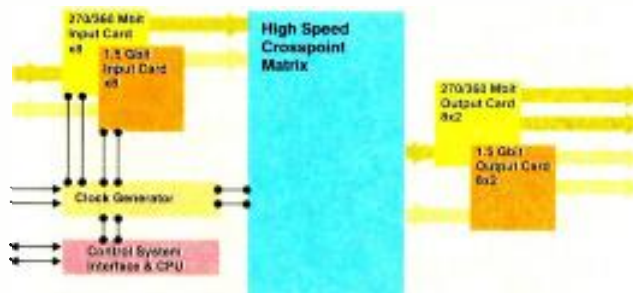

eNVoy™ Series Routing Switch, Block Diagram

At the heart of this new router family is a high speed crosspoint architecture that will handle data rates in excess of 1.5 Gigabits. This structure is combined with various I/O modules to accommodate several data rates. ENVOY users will be able to route any standard rate SDI and HD-SDI signals, within the same switch - at the same time.

This fact, combined with the ability to control the switch from an existing control system, provides incredible power and flexibility.

With the ENVOY series, digital video routing is available at competitive pricing and a compact size: a 128 x 128 frame with dual outputs fits in a mere 16 rack units.

Input and output modules include SDI (143, 177, 270 & 360 Mbits) and HD-SDI (1.5 Gbits) modules. Different I/Os can be included in the same switch, as can dual references to allow simultaneous dual standard 59.94 and 50Hz vertical interval switching. Output options include dual connectors for each destination, to minimize DA requirements.

NVISION's proprietary technology makes this universal digital video switch a reality, and at a remarkably low cost. In addition to these new technologies, NVISION has developed unique circuits for data reclocking, high speed internal interconnect, and cable driving. See Fig 1.

This new router series will enable users to purchase an expandable SDI router that can also have 1.5 Gbit HD added incrementally, as and when required. ■

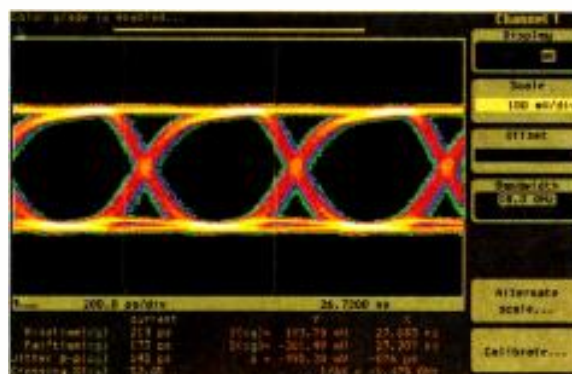



Figure 1. ENVOY 1.5Gbit data output after 75 feet of cable

ENVOY Series Routers

EN6064 11RU frame to accommodate up to 64 x 64 with dual outputs

EN6128 16RU frame to accommodate up to 128 x 128 with dual outputs

EN6256 23RU frame to accommodate up to 256 x 128 with dual outputs

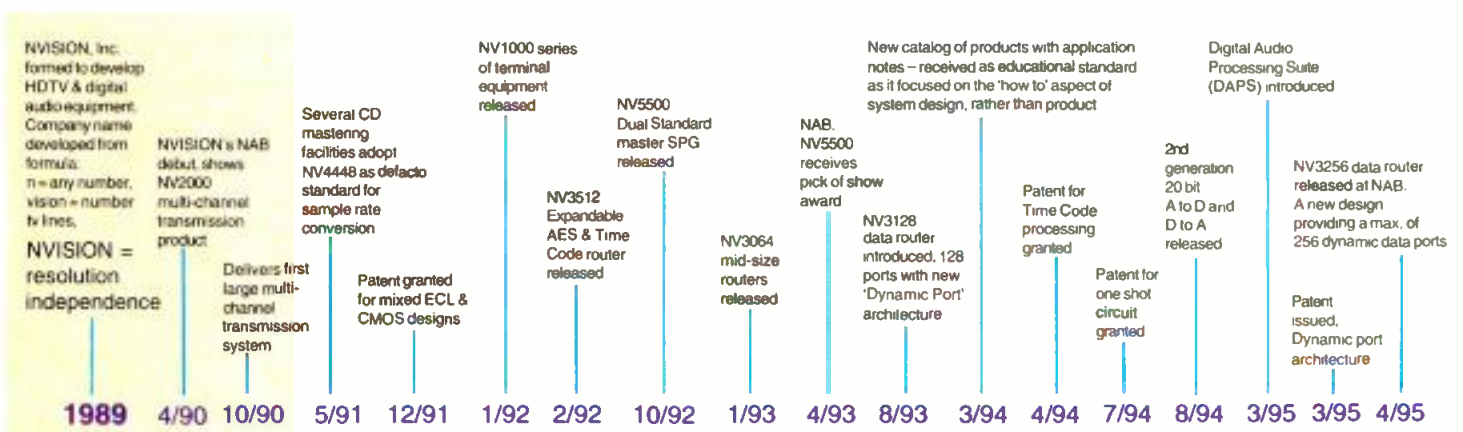

CBS Selects ENVOY for HD-SDI Routing

CBS Network operations center in New York has purchased NVISION equipment for HD-SDI routing and distribution.

Scheduled for installation in September 1998, the initial package includes the ENVOY series 128 x 128 router frame and the 4000 series 1.5 Gbit fiber optic transmission equipment.

The ENVOY router has been chosen to provide the network operations center with an HD-SDI routing layer that will be controlled by a local NVISION panel network. This router is initially loaded as 32² and is expandable to 128² in increments of 8 inputs and 8 outputs. The router will be connected to local HD-SDI sources via coax with longer runs being distributed over 1300nm fiber optic cable.


New 4000 series fiber optic transmitter and receiver modules have been included in this purchase to provide an affordable method of HD-SDI connectivity throughout the facility.

The ENVOY series will provide CBS with room for expansion as well as the ability to add extra SDI layers within the same switch, if desired.

The selection of these new NVISION products provides CBS with an affordable and flexible HD-SDI layer that is easily expanded as needs grow. ■

Green With eNVy™ New Control Technology for the Next Millenium

ENVY, the new router control system under development by NVISION, advances router control to the next generation by providing interfaces and features that will supercede currently available systems. ENVY is being designed to replace current routing control systems for users who require far greater flexibility and operational ease than existing systems provide.

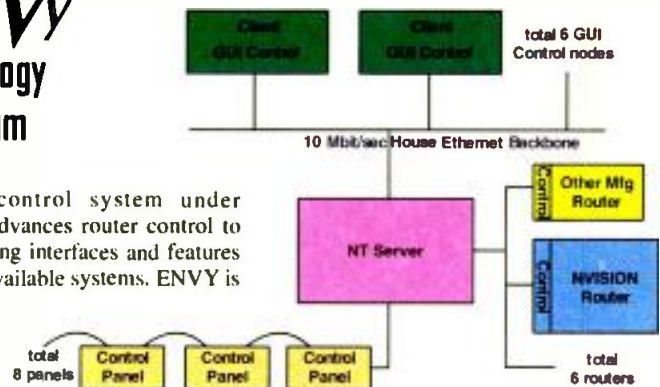

eNVy™ Router Control System (Minimum Requirements)

ENVY Incorporates:

- Easy to understand GUI for configuration using industry standard database.
- Intuitive GUI for control allowing different modes for control and status.
- Easy to use, operator friendly hardware control panels.
- Intelligent routing and conversion through automatic tie lines.
- Standard hardware using Pentium PC technology.
- Standard operating and networking system using Microsoft Windows NT®.
- Controls all NVISION routers and will control many other manufacturers' installed routers.
- ES-Bus serial port for connection to most automation systems.
- Easily expandable for more routers and control interfaces.
- Virtually unlimited router sizes, 2048 inputs x 2048 outputs.

Sierra Design Labs uses NVISION HD-SDI at NAB '98

Sierra Design Labs (SDL), a leading manufacturer of video and audio disk recorders, will utilize NVISION routing at NAB. SDL will be demonstrating new compressed and uncompressed HD disk recorders, as well as their existing SDI machines.

At the show, they will use an NVISION universal video router to switch HD-SDI and SDI signals around the booth. This new NVISION router has the unique ability to allow all SDI data rates and 1.5 Gigabit HD-SDI to be managed within the same switch.

Minimum switch size
Input expansion increment
Output expansion increment
I/O options

8 x 8
8
8 (x2)
SDI input module
HD 1.5 Gbit input module
SDI output module
HD 1.5 Gbit output module

Control System Compatibility


NVISION
NVISION ENVY
Tektronix SMS7000
Philips BTS ES Bus
Pesa
Utah Scientific



NVISION will also provide a 1.5 Gigabit fiber optic link between the SDL booth and their own (both located at the Sands). ■

For more information,
contact: 800-719-1900
www.nvision1.com

NVISION®
Resolution Independence

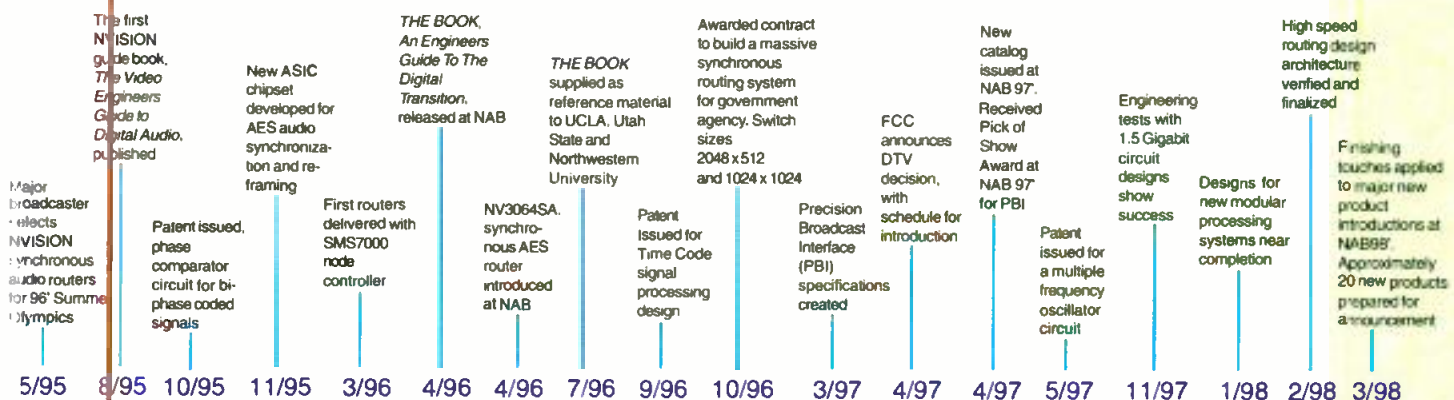

Circle (43) on Free Info Card

www.americanradiohistory.com

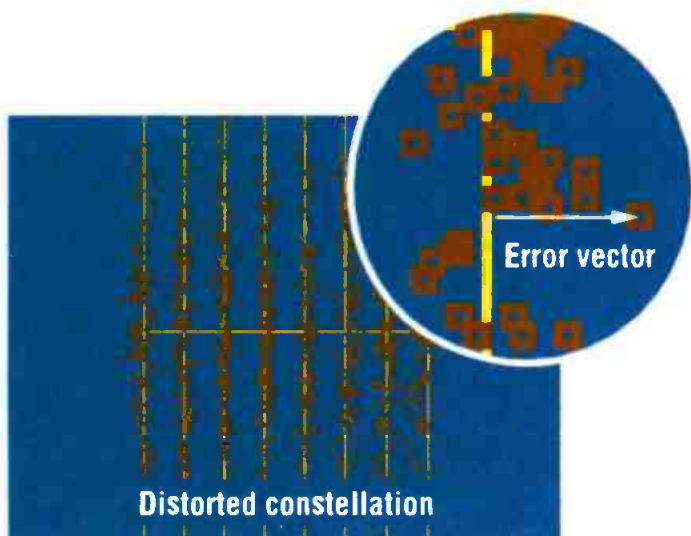


Figure 3. Error vector magnitude (EVM) is the average deviation between the ideal position of a symbol in the I/Q plane and its actual position after amplification.

ly in the current series of tests to provide a basis for comparison.

Error vector magnitude (EVM) indicates the mean deviation between the ideal position of a symbol in the I/Q plane and its actual position after amplification (see Figure 3). A near perfect

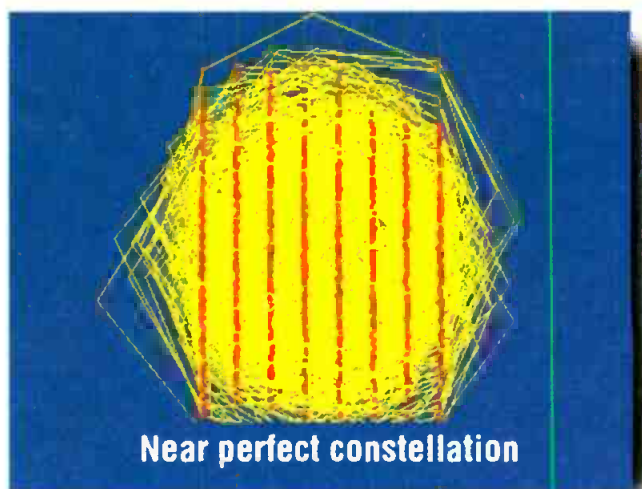


Figure 4. A near-perfect constellation is shown above. A key to this performance is good linearity in the transmitter's amplifier.

circuit's input, shown in Figure 5. The effect is to reduce the passband by generating fast phase rotations. Unfortunately, this makes the correction process less effective. Another approach, developed by TTE for tubes such as the tetrode, Diacrod and IOT, uses a struc-

log operation, is even more appropriate for digital signals.

In designing cavities for its latest-generation tubes (IOT, Diacrod), TTE drew on its long experience with tetrodes to eliminate all metallic parts with floating potential. The output

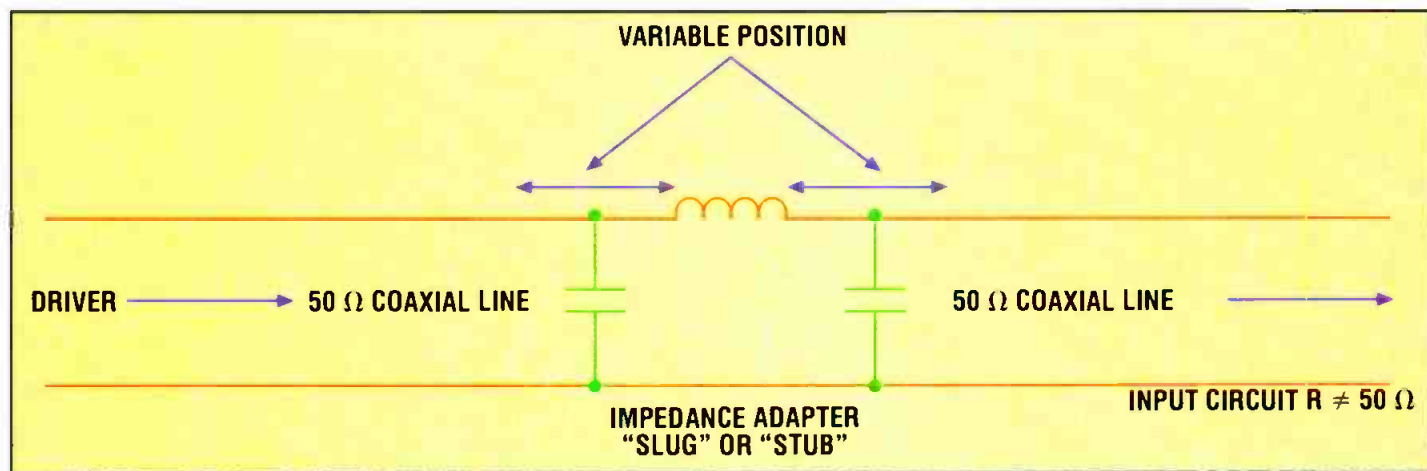


Figure 5. Typical tube input circuits rely on an impedance adapter such as a slug or stub at the circuit's input. Although this helps match the impedance, it also reduces the circuit's passband.

constellation is shown in Figure 4.

The signal-to-noise ratio (SNR) is calculated directly from the EVM measurement because the only source of noise in this type of measurement is the amplifier's non-linearity.

Circuit requirements

To correct for non-linearity, it's usually necessary to use correction. However, the use of a pre-correction signal enlarges the bandwidth of the signal at the input to the final stage. Typical input circuits rely on an impedance adapter such as a slug or stub at the

ture with wideband galvanic coupling at the 50Ω point in the input cavity (Figure 6). This design, although already particularly well suited to ana-

cavities on the IOTs are therefore coupled by a metallic strip at ground potential, which eliminates random trips caused by RF arcing.

PARAMETER	ANALOG SIGNALS	DIGITAL SIGNALS
LINEARITY	INTERMODULATION PRODUCTS	SHOULDER HEIGHT (SEE FIG. 2)
	DIFFERENTIAL PHASE	EVM (ERROR VECTOR MAGNITUDE)
	DIFFERENTIAL GAIN	
	LUMINANCE NON-LINEARITY	SNR (SIGNAL-TO-NOISE RATIO)
CORRECTABLE PEAK POWER	COMPRESSION	PEAK/AVERAGE POWER RATIO
	CROSS-MODULATION	

Table 1. Comparison between typical analog signal parameters against similar digital signal parameters. The measurements that an engineer would make on an analog signal are not applicable with DTV transmissions. This difference requires a new "mind set" when it comes to evaluating DTV transmitter performance.

By the year 2004,
there may be
several intelligent
choices for
digital video servers.


Today there's **one.**

We have more MPEG-2 video
server systems installed than
anyone else in the world. Find
out more about this dramatic
transformation—this SeaChange.



SeaChange International, Inc. www.schange.com
124 Acton Street, Maynard, MA 01754
phone: 1-978-897-0100 fax: 1-978-897-0132
MediaCluster is a trademark of SeaChange International, Inc.
Circle (46) on Free Info Card

The SeaChange Broadcast MediaCluster.™

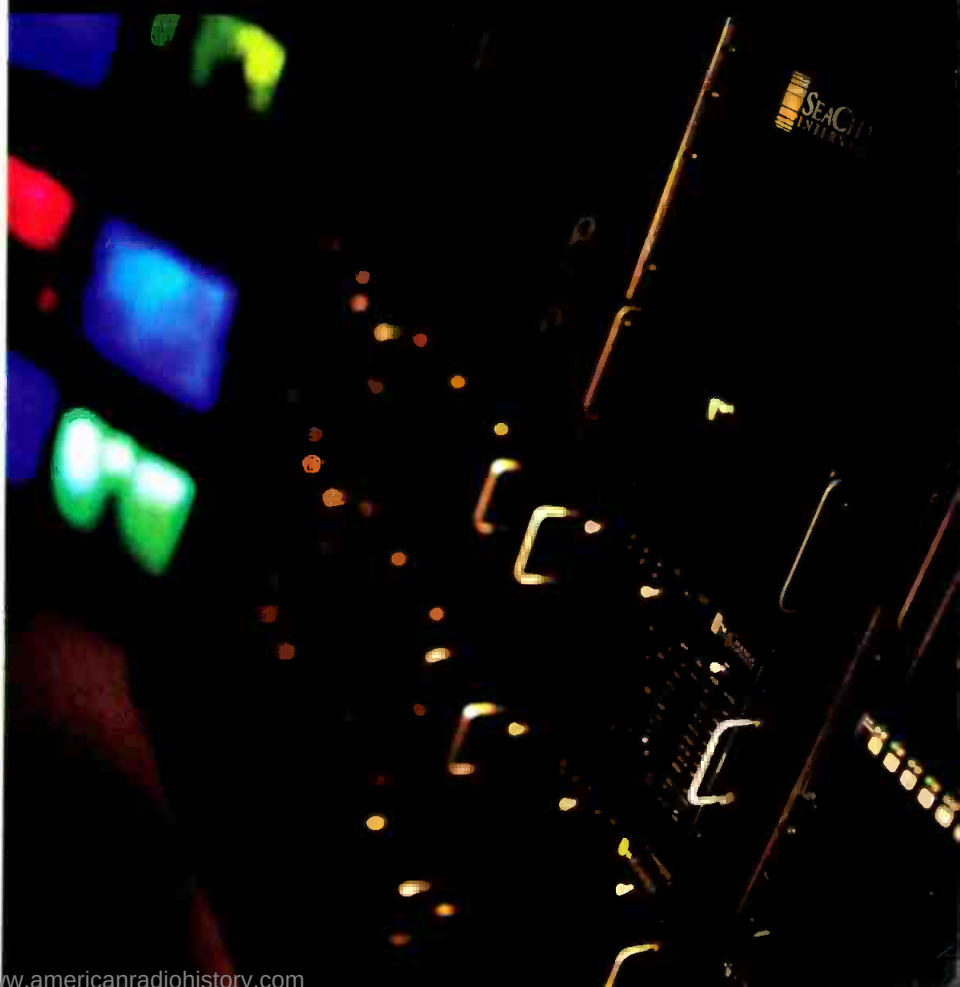

Matthey ELECTRONICS

Available from:

Television Equipment Associates, Inc.

Bill Pegler.

PO Box 499

South Salem, N.Y. 105900499

Tel. 914-763-8893 Fax. 914-763-9158

www.matthey.co.uk



**VIDEO A-D/D-A
CONVERTERS
DISTRIBUTION
AMPLIFIERS**

**AUDIO
MUX/DEMUXES**

**PAL/NTSC
DECODERS**

**FIBRE OPTIC
LINKS**

SDI ROUTERS

Circle (47) on Free Info Card

A test rig for 8VSB digital signal measurements

To determine the DTV power capabilities of various tubes, TTE developed a dedicated test rig. This system comprises a signal generator, which generates random, modulated 8VSB signals at an intermediate frequency, transposed onto the selected channel (for instance, Channel 61 at 755MHz). The signal is amplified by a solid-state stage, operating well under its saturation power level, followed by a tube-type pre-amp stage. The amplification chain was specifically designed to ensure minimum distortion at signal input to the final stage.

The resulting signals can be analyzed at all amplification stages by a vector signal analyzer built into the modulator. The output signal shows the shoulder heights (shown by the markers in Figure 2). After demodulation, the constellation in the I/Q plane can be displayed and three key parameters calculated: error vector magnitude (EVM), signal-to-noise ratio (SNR) and peak/average power ratio.

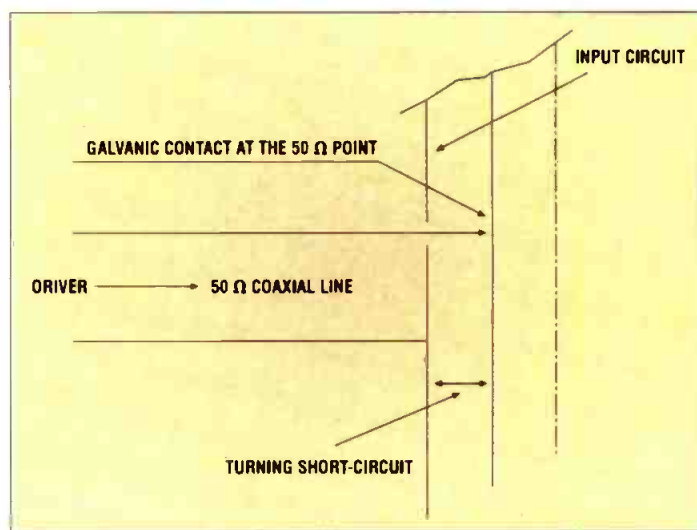


Figure 6. Tubes such as the tetrode, Diacode and IOT rely on a wideband galvanic coupling at the 50Ω point in the input cavity.

By simply changing the type of final amplifier component in the final stage, it's possible to easily measure the digital performance of tetrodes, Diacodes and IOTs.

Uncorrected measurements

The first series of measurements was designed to assess tube performance without correction for tube non-linearity. The power readings for certain tubes (see Table 2) show that correction is not always needed on the final stage. With appropriate correction, however, tubes such as the TH 563 tetrode and the TH 680 Diacode can either deliver more power or provide higher efficiency at a given power level with the same signal quality. The power output of the air-cooled TH 610 Diacode is limited for digital applications solely because of anode dissipation, not because of inadequate linearity.

IOT measurements have been carried out with shoulder levels 5 to 8dB less than the mandatory 35dB shoulder height, which will be easily attained with the corrections in the transmitter. The results of these tests, even without correction, show that Thomson Tubes Electroniques' line of tubes already covers all digital power requirements.



Lifetime
WARRANTY



As if millions
of possible
configurations in our
matrix switchers
weren't enough.

Half-Y

1YDM

1Y-16

4YDM

8Y-XL

At AutoPatch, we only make matrix switchers. So it's no wonder we have a full line of modular, customizable products with millions of possible configurations to match your application. From the simplicity of our *Half-Y* to the unparalleled flexibility of our *8Y-XL*, each AutoPatch product is designed to meet your specific needs.

And our 24 hour AutoAssist phone support guarantees you can get **AUTOASSIST** 24hrs / 800-622-0246 instant technical and installation assistance—day or night.

Affordable, customized products. 24-hour technical support from the best support team in the business. And an exclusive lifetime warranty.* What more reasons would you need?



A Division of XN Technologies, Inc.
2416 Cheney-Spokane Rd.
Cheney, WA 99004-0350
(509) 235-2636
(U.S.) 800-622-0246
Fax (509) 235-2646
www.autopatch.com

© 1998 AutoPatch
* Subject to certain conditions.
See warranty brochure for details.

Circle (48) on Free Info Card

TUBE P/N	TUBE TYPE	NTSC PEAK POWER* (kW)	COOLING	HIGH VOLTAGE (kV)	SCREEN GRID VOLTAGE (V)	ANODE CURRENT I _{A0} AND I _A (A)	AVERAGE DTV POWER (kW)	SHOULDER LEVEL (dB)	E.V.M.	SNR (dB)
TH 563	TETRODE	30	DEIONIZED WATER	9	900	2.5 / 5	10	35.5	1.63	35.7
TH 610	DIACRODE	10	AIR	6	700	1.2 / 3.2	5.5	35	1.95	33.9
TH 680	DIACRODE	60	DEIONIZED WATER	8.5	800	3 / 8.4	22	32	2.46	32
TH 760	IOT	40	WATER	32	-	0.7 / 1.82	19	30	3.25	29.2
TH 770	IOT	60	WATER	34	-	0.7 / 1.85	20	30	2.9	30.2
						0.7 / 2.1	25	27	3.99	27.4

Table 2. Performance characteristics for three types of TTE tubes when operated in the "uncorrected" mode. Note that some tubes don't require correction for DTV operation. However, with appropriate correction, the TH 563 tetrode and the TH 680 Diacrode can deliver more power or provide higher efficiency at a given power level with the same signal quality.

Adjacent channel operation: Advantages of the Diacrode

During the transition period, which could be many years, stations will have to maintain both analog and digital transmitters. There are advantages in being able to transmit both signals with a single device.

The TH 680 Diacrode makes it possible for a single transmitter to simultaneously amplify the two signals when they are in two adjacent channels, i.e., $N/N-1$ or $N/N+1$. The Diacrode's naturally low input and output impedance give it a bandwidth exceeding 12 MHz throughout the UHF band. Figure 7 illustrates the respective input and output signals in an $N/N+1$ configuration.

Table 3 shows the values obtained (without correction) for a Diacrode operating near 750 MHz in the $N/N+1$ configuration. Note the Diacrode's linear performance characteristics. Measured power levels were 25 kW peak of sync in analog and 3.3 kW average in digital, with easy-to-correct signal quality at the output.

As with other tubes, the transmitted power can be increased by using tubes in parallel. For instance, a transmitter using two Diacrodies will simultaneously deliver 50 kW peak of sync in analog and over 6 kW on an adjacent channel for DTV. The power mix may also change over time. In the long run, the analog channel will be eliminated, giving a digital power rating greater than 50 kW. Diacrodies used in this way provide an elegant solution to the problems raised by adjacent channel operation.

The impact of digital technology on tube performance

By their very nature, digital signals



WE'VE GOT SERVICE



DOWN TO A SCIENCE.



Technical Operations will keep you in-production and on-air. With comprehensive equipment service capabilities that are fast, reliable and economical. We provide the service you need - the way you want it: Off-site at one of our professionally staffed service centers, or at a dedicated service shop set-up at your facility. They're the reasons the nation's leading broadcast and cable networks, independent TV stations and production facilities depend on us everyday. *Get your service down to a science* with Technical Operations. For more information call 212-465-1318, outside of NY or NJ call toll free 1-877-420-1600.

TECHNICAL OPERATIONS

Circle (49) on Free Info Card



Take a Look

64 Inputs x 64 Outputs

Extron introduces the Matrix 6400 and 3200 Series Switchers for large-scale routing applications that require a true 64 x 64 matrix. These switchers maintain complete signal integrity, providing a video bandwidth of 230 MHz (-3 dB) when fully loaded. With modular internal busing card slots ready to be filled as needed, the Matrix 6400 and 3200 switchers will grow to accommodate any system— even systems that are still expanding.

The front panel has a large, graphical LCD panel that provides intuitive control over all switching functions. It is so easy, you will forget you ever used a patch bay. Extron's Matrix 6400 and 3200 Series even include an all-new feature called "rooming". Rooming allows each system to function as several independent small matrix switchers, providing all the flexibility you will ever need. Take a look and see for yourself.

The Matrix 6400 Series Switchers provide:

- True 64 x 64 matrix (32 x 32 also available)
- 230 MHz (-3 dB) video bandwidth, fully loaded
- Large, intuitive LCD front panel controller
- Modular design, fully expandable
- Wideband, low res., sync and audio models
- Easily configured for all applications
- Total of 132 presets (100 Rooming/32 Global)
- Simple Instruction Set (SIST™) for RS-232/422
- "Rooming" to organize and manage your system
- Video genlock for seamless composite video switching
- Balanced/unbalanced stereo audio
- Audio breakaway and front panel adjustable gain/attenuation
- Optional internal redundant (backup) power supply
- Optional remote keypads for input and preset selections

Extron Electronics

800.633.9876



EXTRON ELECTRONICS/RGB SYSTEMS, INC.
1230 South Lewis Street, Anaheim, CA 92805
800.633.9876 T 714.491.1500 FAX 714.491.1517
U.S.A.

EXTRON ELECTRONICS, EUROPE
Beeldschermweg 6C, 3821 AH Amersfoort
+31.33.453.4040 FAX +31.33.453.4050
The Netherlands

EXTRON ELECTRONICS, ASIA
41B Kreta Ayer Road, Singapore 089003
+65.226.0015 FAX +65.226.0019
Singapore

EXTRON ELECTRONIC INFORMATION
EXTRONWEB™: www.extron.com
EXTRONFAX™: 714.491.0192
24-hour access—worldwide!

Circle (50) on Free Info Card

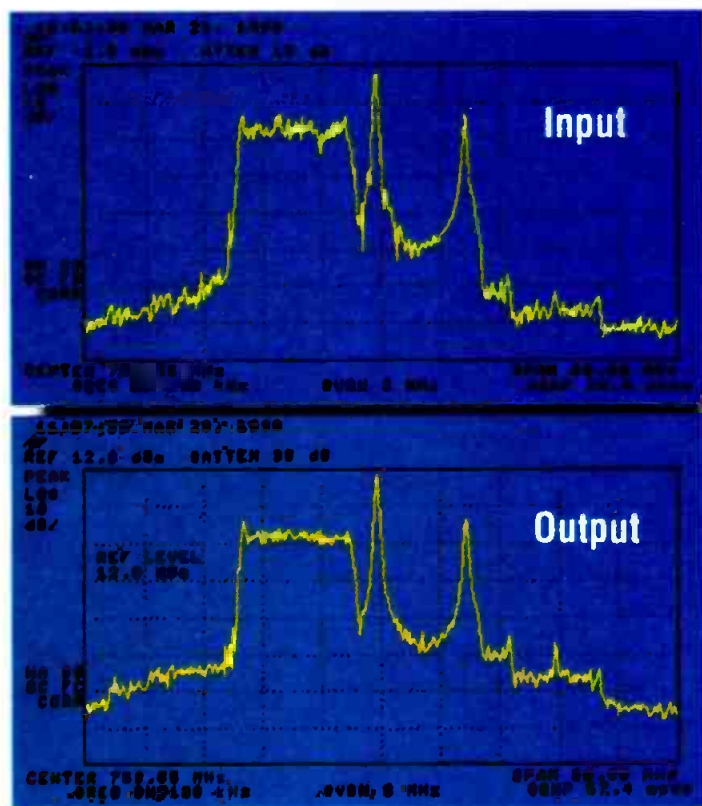


Figure 7. The Diacode's wide bandwidth, typically exceeding 12MHz, results in highly linear operation throughout the UHF band. The figures above illustrate the respective input and output signals in an N/N+1 configuration.

DTV		ADJACENT CHANNELS DTV + NTSC		NTSC	
AVERAGE POWER	22 kW	3 kW	25 kW	60 kW	PEAK POWER PEAK-OF-SYNC
SHOULDERS	-32 dB	-32.5 dB	-13 dB	-10 dB	SOUND
EVM	2.46%	2.4%	5.2%	10%	DIFFERENTIAL GAIN
SNR	32 dB	32 dB	1.3°	2°	DIFFERENTIAL PHASE
			5.4%	10%	LUMINANCE NON-LINEARITY

Table 3. Even when operated in a non-corrected mode, this Diacode, operating in an N/N+1 configuration, shows extremely linear performance. Measured powers were 3.3kW for DTV and 25kW for NTSC.

impact tube performance. Digital signals are characterized by constant average power and very short power peaks. This in turn means that a high-voltage power supply with high internal resistance can be used without causing untoward effects, which are found in analog service. This allows low-value capacitor filtering to be used in DTV power supplies. An additional benefit is that by decreasing the stored energy, simplified protection devices are possible.

When used for digital broadcasting, electron tubes provide constant power, which means lower thermal and mechanical stress during transmitter operation. Thermal and mechanical stress will only occur during transmitter startup and shut-down. These operating conditions contribute to higher transmitter reliability and longer tube life (30% increase can be expected).

The future

This work, which focused on developing high-linearity components for use in DTV, coupled with measurements of non-corrected 8VSB signals, provides data that can be used directly by both equipment manufacturers and broadcasters. The results show that Thomson Tubes Electronique's Diacode and IOT solutions provide a complete range of tubes that are perfectly suited to digital broadcasting at average DTV power ratings from 1kW to 30kW.

Over the next few months, tests will continue and TTE will be recording measurements of corrected DTV signals. This will provide additional data on the power capabilities of these tubes for DTV transmitters. ■

Guy Clerc is technical manager at Thomson Tubes Electroniques, and Michel Langlois is digital applications manager for Thomson Tubes Electroniques, Meudon-LaForet Cedex, France.

DNF
INDUSTRIES

DOES
CONTROL

Building Blocks For Your Specific Applications

Production Switcher Interface	Video Server Controllers	YOUR NEEDS?
PROFILE Controllers	GPI to RS422 Serial Converters	Multi- Machine Control
Fill + Key Clip Control	RS422 Switchers	Editor
VTR Controllers	Slomo Controllers	Video Clip Instant Access

CUSTOMER SERVICE

Field Proven, Award Winning Control Solutions

Call Us: Tel: (818) 252-0198 • Fax: (818) 252-0199
Visit our web site: <http://dnfindustries.com>

Circle (51) on Free Info Card

FOR MORE
information

Circle (241) on Free Info Card

Ready for your

DTV STL?

With the MRC

DAR45

it's as easy as

plug'n'play

While some companies have been talking digital futures, MRC has been:

- integrating the industry's first 2-channel digital STL at the Model HDTV station,
- working with codec and multiplexer manufacturers,
- building alliances with DTV transmitter manufacturers,
- serving on industry committees, and
- developing a full-line of MRC digital microwave solutions.

MRC's digital microwave systems are optimized for DTV transport applications, such as studio-to-transmitter links, satellite backhauls, and intercity relays. And, they're built with all of the ease of installation and high reliability that you expect from Microwave Radio Communications.

Let MRC make your digital microwave the easiest part of your DTV conversion. Call 1-800-490-5700 today.

**CALIFORNIA
MICROWAVE**
MICROWAVE
RADIO
COMMUNICATIONS

20 Alpha Road
Chelmsford, MA 01824
Tel: 1-978-256-3770
Fax: 1-978-256-6225
Email: sales@cm-mrc.com

Step-by-step approach to HD

BY BOB PANK

The TV industry is faced with momentous change in making the move from the current 525/60 NTSC analog to digital services, which include high definition. Two of the greatest questions this change has presented are what picture format to use and when to implement HD. Today, some of those questions are answered as the leading networks announced their intentions for

by Quantel in the last three years is already one step toward the new TV formats. At the tap of a menu box, operation is switched between the 4:3 aspect ratio used today and the 16:9 called for in many of the ATSC's Table 3 video formats. This scheme enables operation with 16:9 video; to see the correct picture, monitors must be set for the new aspect ratio. The signal is essentially no different in nature but is shot and displayed on a wider screen. Changes in the geometry of areas such as DVEs, graphics, text fonts, paint brushes and wipes are implemented to maintain their correct aspect ratio in the wider display.



As facilities move to DTV, the importance of interconnectivity will increase. Shown here is the Quantel Cachebox distribution server, which is DTV and 16:9 ready.

the initial services, but it is clear that both standard definition (SDTV) and HDTV will operate side-by-side for many years. With the uptake of HD by viewers as yet unknown, making the best use of production and post-production equipment requires special attention.

Recognizing the situation, Quantel has devised a scheme to allow the industry to balance real-world economics with the need to change to HD as it unfolds. This is based on the use of existing equipment technology, as well as on two new developments. This step-by-step approach is designed to allow a migration to HD that can go at any pace and make full use of all equipment all of the time.

Step 1: 16:9, 601

The first step, see Figure 1, has already been taken by many broadcasters and post houses using equipment operating with ITU-R 601 4:2:2 component digital coding. Any equipment delivered

Step 2: Up-rez

Pictures produced via the 601 chain represent the highest quality of current television, but this quality is rarely seen because many factors can affect the result. In many instances im-

alog compression of NTSC coding imposes further bandwidth limits, especially in the chroma. No wonder that many who see 601 studio pictures for the first time are so impressed that they think they are already looking at HDTV.

The full potential of 601 currently is best seen from well-shot and well-telecined 35mm film. The film is effectively an oversampled source and produces the sharpest 601 images. When these images are post-produced via a non-compressed 601 chain, the results are excellent — way beyond run-of-the-mill NTSC. The introduction of DTV, with its 480- through 1080-line resolutions, replaces NTSC compression with MPEG-2. Anyone looking at well-produced DVD movie titles (and avoiding the NTSC connection) can already see the excellent quality that MPEG-2 can deliver at modest bit-rates.

Work done back in 1991 with Quantel's HD Paintbox proved the value of good 601 images as sources that could be up-rezed to HD (1,000+ lines) with pleasing results. More recently, images shot on 35mm film, post-produced on

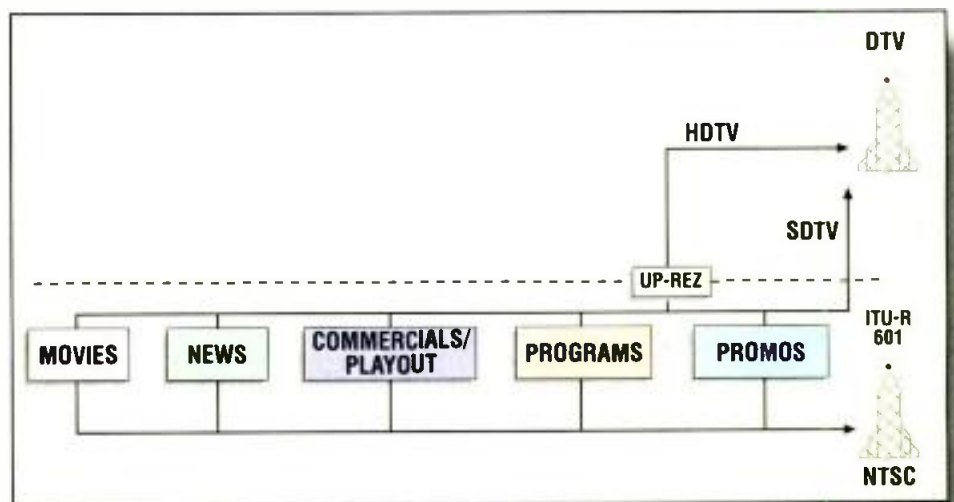


Figure 1. Simulcast where all production is carried out in 601.

age sources such as video may not fully exploit 601's potential to deliver sharp, clear pictures. The use of digital compression may limit frequency response or impose blocking effects, and the an-

601 equipment, up-rezed to 3,000x2,000 and output back to 35mm film via Quantel's Domino have been widely shown in cinemas, where they stand up well against other pure film

Bringing Portable Mixing to the Next Level.

Impressively quiet and with more features than many mixers twice its size, the Shure FP32A set a new standard in field production.

Now comes the FP33. With new high-precision sealed input potentiometers, an improved battery switching circuit, internal headphone level adjustments, and durable 3.5mm jacks, the FP33 takes portable mixing to the next level.

Professional Mixing That Goes Wherever You Do.

The Shure FP33 is a 3-input, 2-output portable mixer specifically designed for:

- Remote audio recording
- Electronic field production
- Electronic news gathering
- Location film production

The FP33 weighs just 3.5 lbs and is about the size of two video cassettes. Providing 8 hours use with just two 9V alkaline batteries — or powered by any 12 to 30 VDC power supply — the FP33 will go wherever you do.

Quiet Enough For DAT.

The FP33 has an exceptionally low self-noise and a wide dynamic range — making it perfect for use with DAT and other digital recording media.

So Many Features In So Little Space.

The new FP33 gives you all the features of the FP32A and more, including:

- Sealed, conductive plastic input potentiometers
- Dynamic range of over 100dB
- 48V phantom, 42V phantom and 12V T (A-B) power
- LED indicators of input levels, output peaks, limiter action, and low battery
- Pop-up pan pots
- Link switch to couple inputs 2 & 3 into a stereo pair
- Mix bus to connect an additional FP33 or FP32A
- Comprehensive headphone monitoring control with MS stereo matrix
- Internal DIP switches for over 4,000 customized set-ups

If you're looking to bring your mixing to the next level, make sure to pick up a Shure FP33 portable stereo mixer.

For the Shure FP dealer nearest you, call 1-800-25-SHURE.





HD applications will increase the need for graphics (and interconnection) functionality. The Paintbox F.A.T. provides both HD and 16:9 feature sets to users.

material.

This example fully validates the next step to HD: up-rez well-produced 601 material to HD (see Figure 2). At NAB this year, Quantel showed results from up-rez at 1080p. The up-rez involves making the best possible use of all the original material. Multipoint bi-cubic interpolation, already applied in print and film resolution systems, was used. Because this process involves vast numbers of calculations to produce high-quality HD images, dedicated hardware is used to give real-time results.

Step 3: Network

During the transition to HD, signals from both normal and high definition will be used to make up programs for both standards. To streamline that process, Quantel has announced that it will introduce a network for video and audio: Clipnet.

To provide infrastructure not only for today's television, but also for HD, Clipnet is standards-independent. And to embrace a broad range of equipment beyond Quantel, it will also connect with computers and other TV equipment. For speed, it must provide a transfer rate at least as fast as ITU-R 601 data: 270Mb/s. Current favored technologies are Fibre Channel and Gigabit Ethernet, and the final choice will be based on performance, cost and industry preference. Although Fibre Channel was used at NAB, no decision is expected until the fall. (Quantel is interested in hearing the views and opinions of its users on this matter.)

Clipnet will lead to a series of new

developments. These developments will take full advantage of the growing body of disk-based equipment used to create new topologies honed to suit new needs and styles of operation. Because this development applies to both today's TV standards and tomorrow's HD, it allows broadcasters and post houses to take early advantage of the technology knowing that it will continue to fit with their future plans.

Clipnet will complement Picturenet (Open), the 100Mb/s Ethernet network for stills and graphics that is already in use. As with Picturenet, Clipnet on Quantel equipment will operate as a totally background task so that all normal operation is fully protected and not interrupted. This point is important for post houses and vital for broadcasters, where on-air or near-to-air operations must continue at all times. Because of the large bandwidth available from the disk systems in Quantel equipment, high

times real-time.

Combining Clipnet with Step 2 allows an up-rez node to be available to any system on the network. Thus, any video produced on any connected machines can be used in HD operations, which allows a station to adopt a soft approach to HD. It can be on-air with HD, yet not be required to commit large sections of capital to a whole raft of HD-native equipment. As HD expands and more HD-native equipment supplies the area directly, the demands on the 601 equipment and the up-rez function can be adapted.

Demands could also develop in the other direction. This HD-original material can be down-rezed to supply the 601 area, thus avoiding the need to duplicate effort and providing outstanding images for 525 viewers.

Step 4: The Full Monty

The final step introduces equipment working directly at HD resolution (see Figure 3). The demonstration at NAB of "The Full Monty" was a technical statement that achieving the largest format of the ATSC digital standard, 1080p (shown running at 60Hz rather than

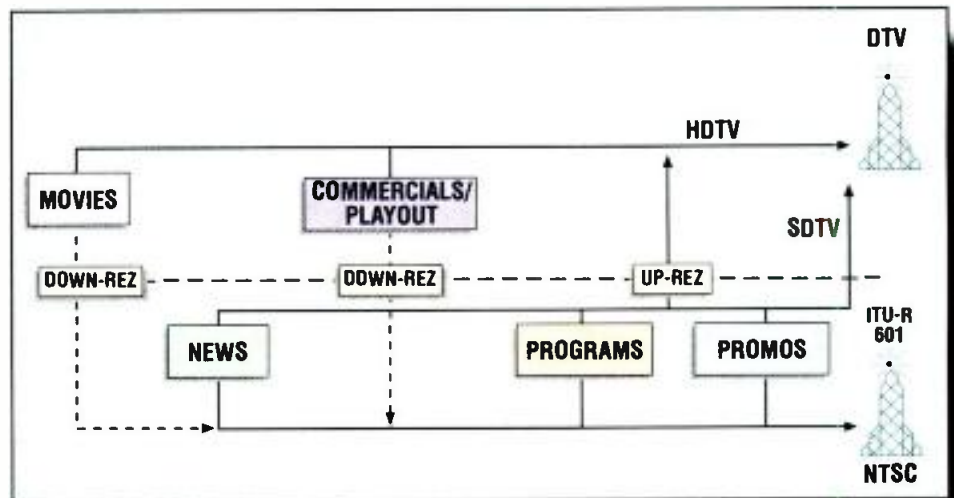


Figure 2. Hybrid production mixing down-rezed native HD and up-rezed 601.

network transfer rates can be sustained even while the equipment is fully operational.

Clipnet will provide transport for a wide variety of signals. Besides operating with full 601 and HD, Quantel equipment also uses DV compression at 25 and 50Mb/s. It is expected that DV25 data will transfer at up to 10

30Hz to reduce flicker on the monitors) is well within Quantel's reach. This fact should be no surprise to those involved with film compositing because the Domino film compositor has been operating at up to 3k x 2k for five years and providing real-time replays.

Monty is a preview of a new technology platform designed for HD. As the

ATSC MONITORING

IF YOU HAVE TO KEEP A CLOSER EYE ON ATSC DEVELOPMENTS, READ ON...

If you want to see the future of Digital TV then it's time you took a look at the new Stream View from Adherent. As you would expect from an active member of ATSC it's ground breaking - with the capacity to automatically monitor more channels than ever before.

The new AT970 Stream View from Adherent:

- real time monitoring of four streams;
- continuous measurement of essential ATSC parameters;
- rack mounting with local or remote control through standard networks;
- comprehensive error reporting, alarm and triggering functions.

Check out the latest product from the people who brought you the MPEG-2 Stream Station.



Remember. Seeing is believing. For further information contact our North American representative Sencore, tel: 1-800-SENCORE or (605) 339-0100. Web: www.sencore.com Web: www.adherent.com

ATSC



Adherent

NEW PRODUCT

Circle (71) on Free Info Card

ATSC defines a number of different production formats, it is essential that any equipment should be able to work with any one of them. It is also clear that

can compose video from any TV source onto one picture — true resolution independence. Thus, the wealth of 525 source material can still be used either

to handle the largest format from Table 3 (1080x1920) with the same speed and flexibility that program makers are already accustomed to with normal resolution Quantel equipment. This way every format is handled fast, maintaining both the creative flow and everything that makes the medium as fast and flexible as it is today.

HD will have a major impact on the broadcast business. Quantel's step-by-step approach aims to make HD practical and creative for all involved with editing, post production and graphics. HD cannot signal the return to outdated production methods or limit operational flexibility. Neither can it obsolete all of today's facilities. Quantel's step-by-step addresses these concerns with a pragmatic approach that balances short-term issues against long-term aims. ■

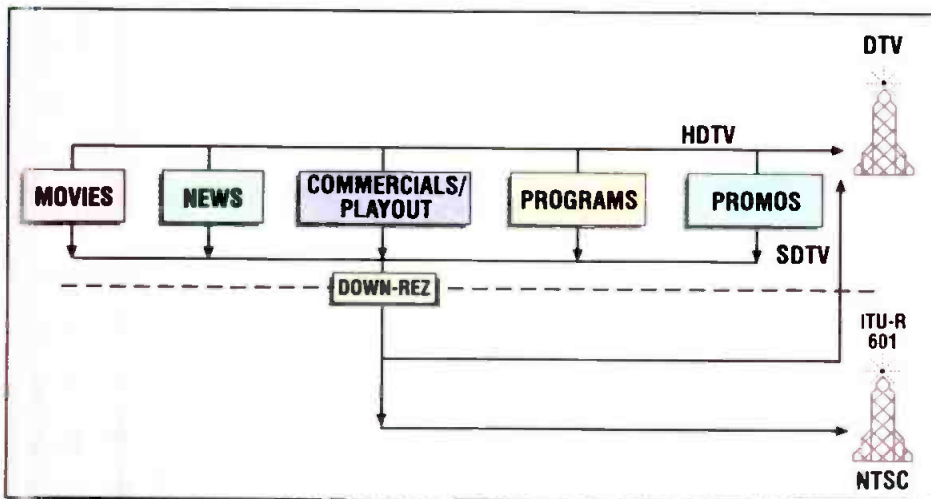


Figure 3. A full HD-production environment with downconversion for SDTV and NTSC.

material will be generated and made available in any of them. To make full use of this versatility, Monty can accept and operate with any TV format, plus normal 525/60, and output as the same or any other format. More than that, it

as elements for composition or at full-screen. If material for a documentary were available on 16mm film, 525/60 D-1, 525/60 Beta SP, 1080i, 720p and 480p, it could all be used directly.

The idea of Monty is to build a system

Bob Pank is technical communications manager, Quantel Ltd., Newbury, UK.

FOR MORE Information
Circle (242) on Free Info Card

Upconversion and digital television

BY ADOLFO RODRIGUEZ

The arrival of digital television (DTV) in the United States has brought high-definition video to the top of the list for many video facilities. One of the many challenges DTV brings is the availability of high-definition program material in the early years. This is where upconversion plays an important role by providing high-definition video from the standard-definition programming available today. Upconversion is also a critical component in any video facility in the long term.

What is upconversion?

Upconversion converts standard 525-line or 625-line video to high-definition line rates. The DTV standard has different high-definition line rates, as illustrated

in Table 1. Upconversion can also include conversion of the aspect ratio from 4:3 to 16:9. interlaced active lines, the active portion of the 525-line video (483 lines) may be de-interlaced, and lines may be repeated as vertically adjacent pairs and then scaled to achieve 1080 active lines, which are re-interlaced. This approach achieves the higher line rates but with compromises. The line repetition may lead to the cascading of artifacts as the video signal is doubled or quadrupled.

A better approach is interpolation technology to achieve the higher number of lines and higher number of horizontal pixels. Horizontal interpolation is used to get from 720 pixels to 1280 or 1920 horizontal pixels. Vertical interpolation is used to get from 483 active lines to 720 or 1080 active lines. Interpolation technology provides the highest accuracy

upconversion by using both spatial and temporal information. This spatial-temporal filtering process creates new picture information rather than simply repeating the information already within the video signal, resulting in greater picture resolution.

How good does upconversion look?

Most people are surprised when they first experience the quality of an upconverted high-definition signal. The expectation is generally that it cannot possibly look as good as a true high-definition signal available from full high-definition production. However, upconversion using interpolation technology delivers an enhanced viewing experience by providing a higher horizontal resolution, a higher line rate, the benefits of component digital video and a 16:9 aspect ratio. It also releases about 40% of the vertical resolution present in the standard-definition signal but not seen in an interlaced display because of the Kell factor effect.

The Kell factor defines the effective vertical resolution perceived by the human visual system when viewing an interlaced video display. A typical Kell factor is 0.7, which, applied to the 525-line system, results in an effective vertical resolution of 338 out of 483 active lines. Using interpolation technology, the resolution of all 483 lines can be used to generate the higher line rate of 1080 or

Format	Horizontal Pixels	Vertical Lines	Picture Rates
1080	1920	1080	60i, 30p, 24p
720	1280	720	60p, 30p, 24p

Table 1. The DTV standard provides several options for broadcasters' transmitted image standards.

ed in Table 1. Upconversion can also include conversion of the aspect ratio from 4:3 to 16:9.

There are several methods used for upconversion, but they all generally include the creation of new pixels to reach the high-resolution line rates. One approach is to use line doubling or line quadrupling technology to get close to the required number of active lines (1080 or 720 in the case of DTV). This line multiplication approach is then combined with a scaling function to obtain the exact number of active lines. For example, to create 1080

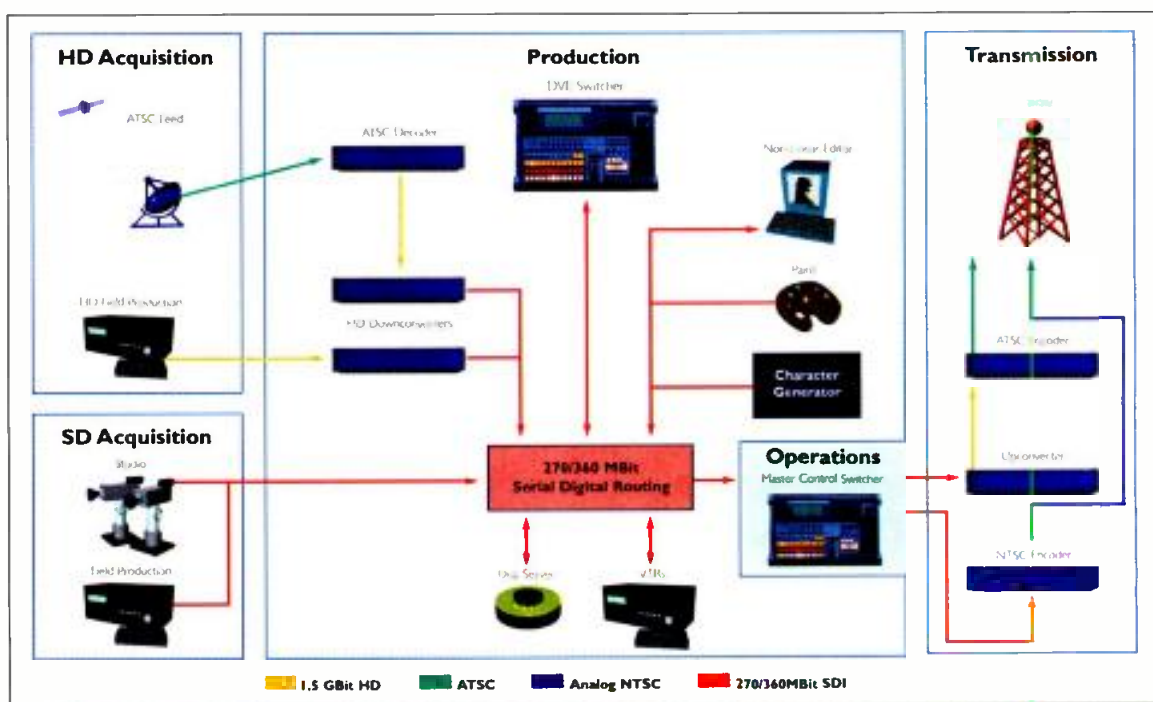


Figure 1. The 601 option affords stations a cost-effective entry point into DTV, while laying the needed digital foundation for future HD origination.

The transmitter the
broadcast industry
has been asking
for is here.

Providing Solutions

The VISIONARY™ UHF IOT transmitter.

VISIONARY™ series transmitters combine ITS Corporation's extensive exciter/driver experience with proven IOT amplifier technology to provide a world class transmitter system. Easily configured for analog or digital broadcasting, the VISIONARY transmitter series is your high power UHF solution for today and tomorrow. Utmost performance and redundancy within a small footprint is the mark of this series. Power levels of 20kW-280kW analog or 12.5kW-100kW digital are available in air or water cooled configurations. Exceptional performance derives from highly stable and low noise carrier generation, precise digital filtering and quadrature vector modulation techniques, and highly linear feedforward amplifiers. The 44MHz IF is compatible with analog, making digital conversion very straightforward.

ITS Corporation's Broadcast group is now the Broadcast Systems Division of ADC Telecommunications. Same RF experts. Same quality solutions. And more....



Broadcast Systems Division

102 Rahway Road
McMurray, PA 15317
USA

www.adc.com/broadcast
broadcast_info@adc.com
TEL 724-941-1500
FAX 724-941-4603

Circle (53) on Free Info Card

720 active lines. This additional 40% of vertical resolution ((483-338)/338 ~40%) provides more resolution to interpolate, which contributes to the enhanced HDTV viewing experience.

Applications of upconversion

In many cases, upconversion can reduce the transition cost to DTV by allowing facilities to leverage off their vast quantities of archived 525-line material. This gives broadcasters the flexibility to start transmitting HDTV immediately by using current infrastructure. For example, a facility would use downconversion to standard definition, add lo-

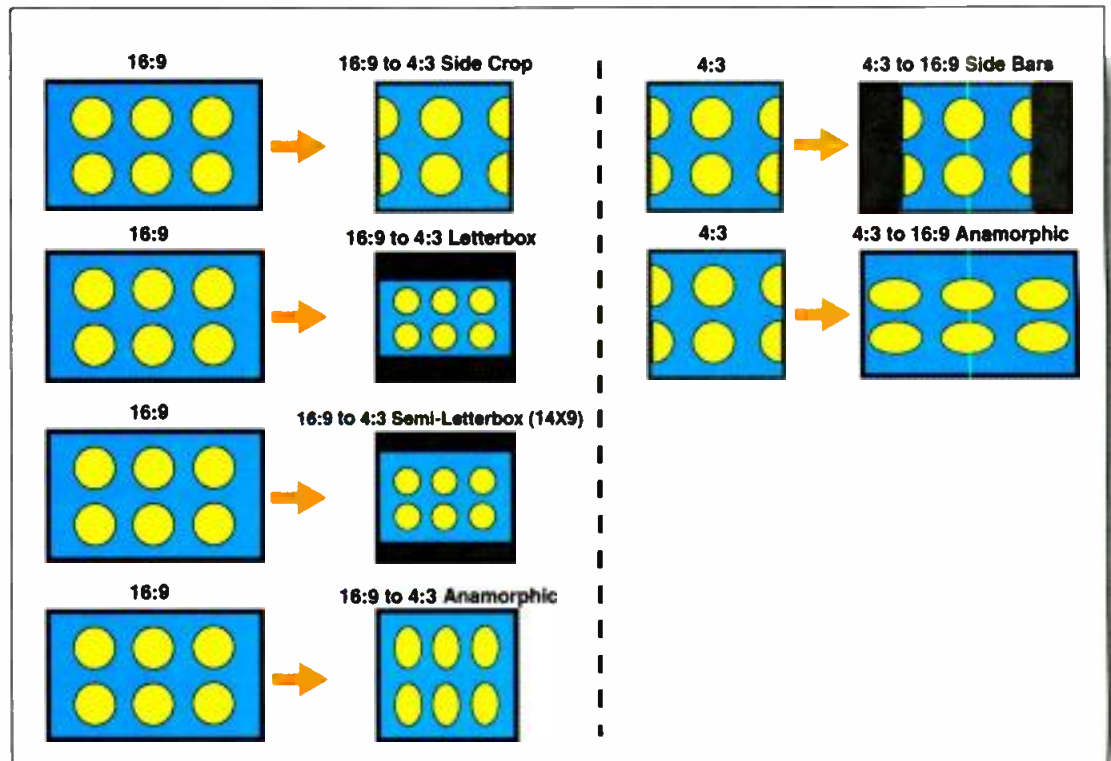


Figure 2. When converting from 16:9 and back, a range of options exists. Engineers need to be sure that the equipment selected to handle this task is capable of artistic decisions that may come from the programming staff.

DIGITAL TELEVISION POP QUIZ

Which transmitter manufacturer has 75 years experience in television transmission?

Which transmitter manufacturer designed and built a 250kW single IOT amplifier?

Which transmitter manufacturer develops its own 100% digital ATSC and NTSC TV exciters?

The answers may surprise you...



Continental Electronics Corporation

214-381-7161 • Fax 214-381-3250

800-733-5011

<http://www.contelec.com/>

Circle (54) on Free Info Card



Feast on Multi-Channel Digital Effects.



Presenting AlladinPro. The Affordable, Digital FX Solution.

AlladinPro is the must-see, digital video effects system that satisfies even the most jaded palate. AlladinPro is a completely integrated system that delivers multi-channel digital effects. You can step up from the best-selling DVE of all time, the Alladin, to the AlladinPro to show people what's really on your mind. And do it rather quickly with our dedicated control panel. Now you can have affordable real-time digital video processing on two DVE channels with key. The powerful StudioTools option even adds a character generator and paint system. StudioTools turns a great DVE into a powerful stand-alone graphics and effects compositing system. Our warp engine pushes even harder; and image effects are always part of the package. Storage? 2,000 still images with key are right at your fingertips. See why AlladinPro is the most appetizing, low-priced NT-based production package of choice for professionals just like you. 1-800-4PINNACLE.



www.pinnaclesys.com

See What You Think.

Circle (72) on Free Info Card

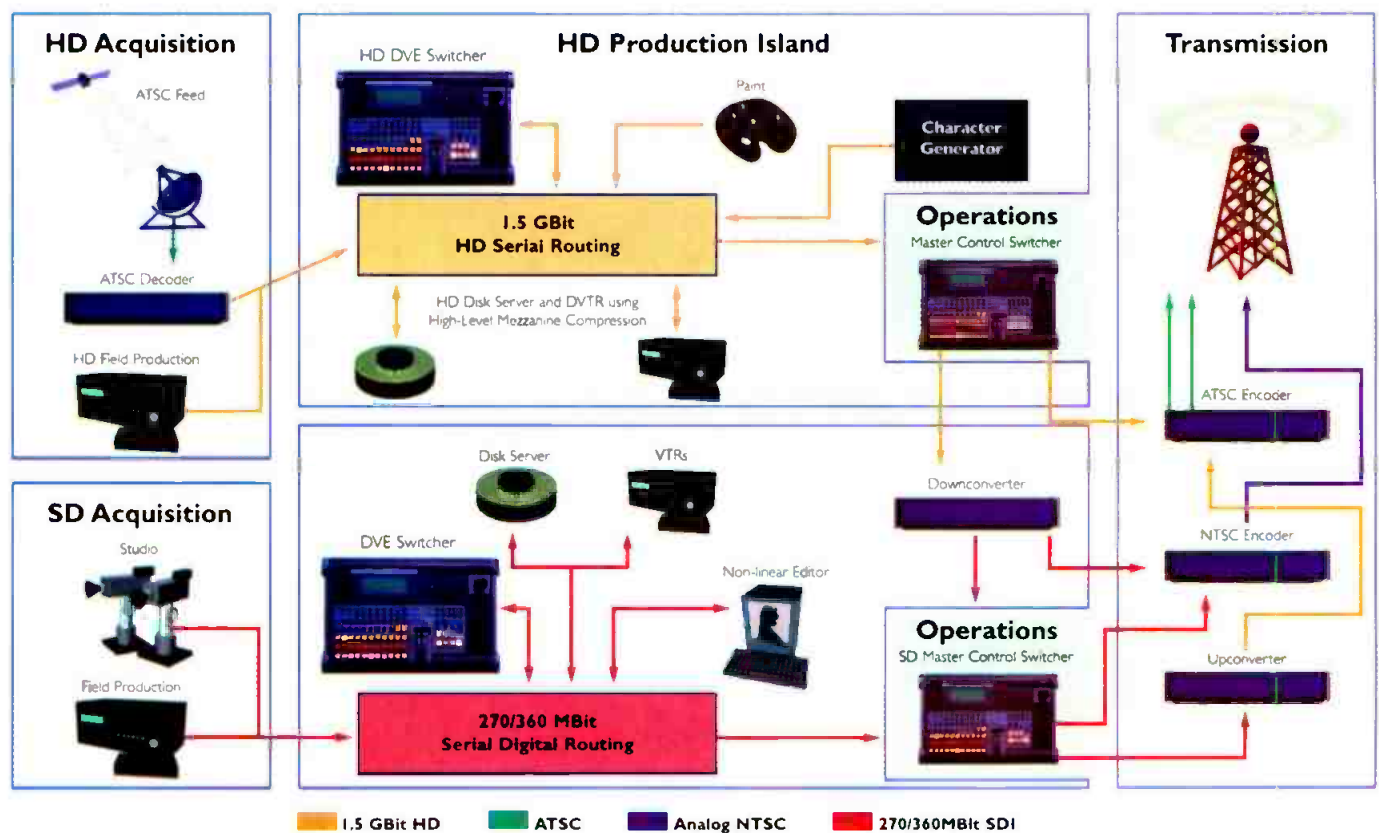


Figure 3. This HD production island approach affords stations a cost-effective way to begin HD transmissions without having to completely rebuild the facility. Legacy equipment, supplemented with up- and downconversion equipment, can greatly reduce the entry cost of beginning HD broadcasts.

cal production and identification, up-convert, then simulcast high-definition and standard definition.

Optimizing upconversion

An up-converter is like a magnifying glass, and any artifact present will be more visible when converted to high

definition. Because upconversion quality is limited to the resolution and quality of the original material, care must be taken when up-converting to high definition. The best upconversion results are obtained by using analog or digital component 4:2:2 signal sources. The use of 4:2:0 or 4:1:1 sampling structure should

be avoided if possible because they can reduce chrominance resolution for use in the interpolation process.

When up-converting from composite (NTSC, PAL, PAL-M or PAL-N), it's important to use a high-quality decoder. The best decoding performance is obtained from an adaptive three-dimen-

The Look of Kino Flo

Kino Flo's innovative **True Match**® Lighting Systems give you the look of quartz or daylight, but without the heat. Controllable, portable and durable, Kino Flos pack a powerful punch, yet run on an energy-lean diet.

For studio or location. Serious light you can stand by.

K I N O F L O

10848 Cantara Street / Sun Valley, CA 91352 / 818-767-6528, Voice 818-767-7517, Fax

Circle (69) on Free Info Card

sional decoder, such as the Snell & Wilcox Golden Gate. Again, the objective is to reduce any decoding artifacts, such as cross-chrominance or cross-luminance, before up-converting. Once these types of artifacts are introduced, they are difficult to remove in a downstream process and will be obvious in the up-converted high-definition video.

Noise is another critical quality consideration when up-converting standard-definition video. Noise is present in all signals and can come from many sources. Many types of video noise are inherent in the video processing or distribution methods employed in TV stations. Video noise can be caused by the electronic processing in a transmission system, crosstalk, dropout, time-base errors in VTRs, and digital errors in digital links. As with decoding artifacts, noise is magnified by the upconversion process, which produces a less than optimal high-definition signal. It is therefore important to reduce this noise before the upconversion process.

This is where a noise reducer plays a vital role in eliminating as much of the noise as possible before converting the video to high definition. Noise reducers usually provide a number of video filters tuned to reduce a particular type of noise. Typical choices include recursive filters, which reduce noise by filtering the video temporally; spatial filters, which filter the video in the spatial domain; non-linear median filters, which remove impulse noise; and linear filters, which remove high-frequency noise.

The best upconversion results require great care in decoding composite video sources and always use noise reduction techniques before upconversion.

Aspect ratio

Not all upconversion and downconversion decisions are quality related. Besides a higher horizontal and vertical resolution, high-definition video also has a different aspect ratio than we are used to seeing in television today. This difference requires some creative production decisions to be made with respect to the viewable area. Using proper filtering, an up-converter or down-converter can pan, scan, re-size, or re-shape the image. For example, converting from 16:9 to 4:3 aspect ratio, the image can be cropped

and put in letterbox or semi letterbox. Conversely, when converting from 4:3 to 16:9 format, the image can be displayed with sidebars or semi sidebars, or it can be anamorphically stretched to fit the new format. Figure 2 summarizes these options.

Upconversion in the long term

The goal of most video facilities is to move to high-definition video production as soon as possible, but to do so in the most cost-effective way. One such method is to design high-definition islands. This approach is illustrated in Figure 3. This design uses an existing video infrastructure equipped with small islands of HDTV production. This method minimizes the initial investment and provides a cost-effective way to build toward full HD capability. The role of upconversion in this scenario is to provide a way to use the large amount of standard-definition archive material most facilities have — and need to use. An added benefit is combining upconversion with standard-definition cameras

for close-up shots in sports and insertion of standard-definition news clips.

A good solution

Upconversion can be a great asset for any facility moving to high-definition video production. In the short term, upconversion (and downconversion) will help get HD signals on the air while high-definition-generated program material grows. Over the long term, upconversion provides a way to deliver quality standard-definition archive material in a high-definition environment. In addition, upconversion also provides some interesting video production options by providing a way to use standard-definition video in special cases, such as close-ups in sports and news acquisition. ■

Adolfo Rodriguez is director of marketing, U.S., Snell & Wilcox, Sunnyvale, CA.

**FOR MORE
Information**
Circle (240) on Free Info Card

Quick Strip!



5 in 1

TS100E COAXIAL CABLE STRIPPER

- 5 strippers in 1 easy to use hand tool
- Rotary knob selects 5 different cable setups
- Replaceable circular steel blade cassettes
- Adjustable cable range: .158" OD to .433" OD
- For all Canare 75Ω BNC, RCA & F Crimp Connectors



REQUEST
NEW
CATALOG 9



531 5th Street • Unit A San Fernando, CA 91340 USA
tel: (818) 365-2446 fax: (818) 365-0479
www.canare.com

Circle (70) on Free Info Card

Video servers

BY THE BE STAFF

The use of video servers is ubiquitous. No matter how small the facility, TV station or production house, servers are now key to an efficient operation. However, just because they are common, doesn't mean they're easy to buy — or to understand. Video servers have their own terminology, and the first step in buying any server is to understand the language.

Video server terminology

- **Primary application:** Many manufacturers will claim that their servers will do everything. It's a news server, a production DDR and an on-air playback server. Don't believe it. While the basic building block may be able to do all of these things, the surrounding systems tailor the server to a task.

For instance, the features of a news server are vastly different than those of a DDR application in a post suite. In one case, you need to handle multiple users, probably with minimal quality. On the other hand, production applications typically serve only one or two clients and do so on a few I/O paths, but perhaps need HD quality.

All this doesn't mean one company's product won't work in a variety of applications. It does mean that the product needs to be configured differently for every type of application. Check and be sure that's possible.

- **Number of I/O channels supported simultaneously:** Like above, be sure the system is tailored to the number of channels you need to serve. This operational feature is highly related to maximum aggregate bandwidth and number of workstations.

- **Number of workstations supported:** How many clients (workstations) do you need to serve. An on-air server has one or two workstations; a news server may have 20 or 30. Determine the quality level that is needed at each location.

- **Maximum aggregate bandwidth:** It's a lot like dividing a pie; the server's total aggregate bandwidth is a resource that

must be divided among its inputs and outputs. For instance, a server bandwidth of 250Mb/s might allow you to handle one video input and four compressed video outputs, but it won't provide dual streams of HD video.

- **Compression encoding:** Motion JPEG used to be the most common compression format. However, as of this year's NAB, most server vendors began offering MPEG encoding with their systems. This allows stations to limit the number of encode/decode processes.

Finally, some servers provide uncompressed recording. This works only for short-format applications. It takes 121GB per hour of video. Try storing 1,000 commercials in an uncompressed format and see how much it costs. However, if you're producing those commercials, you may want to keep all that layering in uncompressed states until the final product is produced; but that may be minutes — not hours — of storage.

- **Range of compression:** Naturally, this relates to the amount of compression used. A 1:1 ratio would be uncompressed, where as 4:1 might be considered a mildly compressed signal. In PPV and NVD applications, 20-30:1 compression levels are common. That works here because the video is never manipulated. It's designed only to be viewed.

- **Output signal interfaces:** Early servers stuck to 601 or NTSC outputs. Today, many offer ATM and Fibre Channel (FC). First, ask what's needed now, then ask whether you'll need to support other types of outputs in your DTV future. Many vendors are offering optional ATM outputs.

- **Support random access:** True random access does not mean playing a clip from one location and the next clip from the next sequentially-stored location. It means playing any clip from any location at any time. The location of the clip is independent from whether or not it can be played sequentially. Production applications often require

this feature.

- **Smallest randomly-accessed clip:** What is the smallest clip that can be played indefinitely? Check this specification carefully. It depends upon the speed of the disk and the amount of onboard memory. In post and editing applications, this is important.

- **Support pre-read:** Only now are server vendors realizing that editors need the ability to handle pre-read. In essence, they're asking the server to "act" like a tape machine. On-air and news servers may not need this feature. Production environments certainly would see this feature as useful.

- **Non-destructive pre-read:** While tape pre-read is destructive, disk pre-read doesn't have to be. The implementation of this feature depends on the vendor.

- **Automation traffic interfaces:** Simply put, most on-air servers will interface to most traffic systems. If you are planning on adding a server into an existing cart machine environment, be sure the vendor will help you with the interfacing.

- **Backup/redundancy:** How much do you want? How much are you willing to pay for? Although disk systems are reliable, they are not infallible. Do you need mirrored systems, dual power supplies, hot-swappable drives? All these are available and only you can decide which are important to your application.

The table

The table on pages 128 and 129 lists key server manufacturers and their products. The goal was to provide, in one compact table, a sampling of server products that are available. Coupled with your set of needs and an understanding of key terms, you're ready to decide which products to consider further. ■

**FOR MORE
Information**

simply circle the appropriate numbers
(see the second column of Table 1 on
pages 128-129) on the Free Information
Card found on page 115.

Windows to the Web



www.stortek.com

StorageTek: StorageTek's MediaVault is a complete storage management system for broadcasters migrating to digital systems. It combines ultra-fast automated tape libraries, ultra-high capacity SD-3 helical-scan cartridge drives and applications-enabling software.



www.pinnaclesys.com

Pinnacle Systems: Pinnacle Systems' broadcast products give professionals the cutting edge tools needed to create dazzling productions faster and more affordably than ever before. These innovative digital video manipulation tools perform a variety of on-air, production, and post-production functions such as the addition of special effects, image management, capture, storage, and play-out, as well as graphics and title creation.



www.e-trim.com

eidria: e-trim is the logging and machine control package for the 3Com PalmPilot and PalmIII series of handheld devices. e-trim provides complete connectivity to most cameras and decks, including RS-422 and LANC (Control-L) devices, as well as LTC timecode feeds - all without any adapters or converters. Simply connect e-trim to your source, mark in and out times to create clips, then HotSync with any Macintosh or Windows computer and your log is ready for import into a variety of editing systems. Questions? www.e-trim.com



www.broadcastengineering.com

Broadcast Engineering: Broadcast Engineering is the only technology-driven online magazine in the industry. Its editorial environment delivers practical, informative articles on digital technology, systems integration, management, how-to installation, and systems and equipment maintenance. It is a package geared toward TV stations, cable/telcom, production, post-production, business TV, satellite and interactive television.



www.nova-sys.com

Nova Systems: A leading manufacturer of signal processing equipment for television broadcast, teleproduction, and industrial video applications. Nova's product line corrects, converts, and distributes video as well as audio signals.

**Your
Web Site
Here**

eric_proffitt@intertec.com

For more information on advertising in the Windows to the Web or on the Broadcast Engineering Web site, contact Eric Proffitt (913) 967-1860 or e-mail at the above address.

Company	Free Information Number	Model	Primary Application	# of I/O channels supported simultaneously	# of workstations supported	Maximum aggregate bandwidth	Compression encoding supported?	Range of compression provided	Support uncompressed HD format signals?	Output signal interfaces supported	# of audio channels and data rates of each?	Support true random access?	Smallest, randomly accessed clip	Support Pre-read for editing?	Destructive-/Non-destructive?	Automation/traffic interfaces	Backup/redundancy provided?
Accorn Inc	450	Axess	On-air	4 per work station	32 maximum	N/A	Uncompressed	N/A	N/A	ITU-R/BT 601 and AES audio	4-track AES, 48kHz	Yes	1 frame	N/A	N/A	Louth, Pro-bel	Zip drive, MO, DLT
ASC	451	VR300	On-air	20/FC-AL, 60/FC Fabric	20/FC-AL, 60/FC Fabric	1Gb/s/FC-AL, 3Gb/s/FC Fabric	M-JPEG 4:2:2	2.3:1 to 30:1	No. It supports mezzanine level HD compression	SDI, composite, analog component, FC, ATM	4 audio ch/video ch, 48kHz AES	Yes	90 frames	No	Non-destructive	All leading systems	RAIDsoft, hot swap drives, dual PS/fans
Avid	452	Media-Server	News	12 video clients and 48 audio/client	12 clients	60Mb/s	JPEG, M-JPEG	AVR 70 and 70H or 110KB/frame	No	FC/SCSI and ATM	48 channels of audio, 44.1kHz and 48kHz	Yes	1 second edits	N/A	Non-destructive	Avid AirPlay MP/beta carts	RAID-3
Celerity Systems	453	CTL-9000	On-air	600 at 3Mb/s per node, multiple nodes supported	600 w/network, 6000 users/node	1.8Gb/s	MPEG (or any binary format)	9Mb/s MPEG-2 to 1.5Mb/s MPEG-1	No	ATM over OC-3 or ATM-25.6	User selectable from 56Kb/s to 384Kb/s	Yes	A single video frame	N/A	N/A	Celerity's Multimedia Interactive Exchange software	RAID
dataDIRECT Networks	454	CDNA	News	1000	1000	up to 20Gb/s	Uncompressed	User selectable	Yes	FC, SCSI (ATM future release)	8 channels	Yes	user selectable	Yes	N/A	yes	
Drastic Technologies	455	VWV series	On air	2, 1x2	24 FC-AL	20Mb/s	M-JPEG	M-JPEG, MPEG-2, DV, DVC, 10-bit	No	FC, SCSI WideBand, Gb	4 channels	Yes	1 frame	Yes	Yes	OVOR/Oodexs/Louth, RS-422	RAID
Digital Video Systems (DVS)	456	Clip-Server-HD360	Production	4	up to 20	1.5Gb/s	HD360 (Panasonic HD-D5)	4:1	Yes	FC, SCSI ATM, 292M	4 or 8, 1Mb/s	Yes	1 frame	Yes	Non-destructive	Louth compatible	RAID-3 option
	457	Clip-Server-Pro	Post Production	4	up to 20	1.5Gb/s	Uncompressed	None	No	601, FC, SCSI, ATM	4 or 8, 1Mb/s	Yes	1 frame	Yes	Non-destructive	Louth compatible	RAID-3 option
	458	Pronto-Vision-S	On-air	2	up to 20	3Gb/s	Uncompressed	None	Yes	292M, FC, ATM	8, 1Mb/s	Yes	1 frame	Yes	Non-destructive	Louth compatible	RAID-3 option
Doremi Labs	459	V1 Server	On-air	24	64	200Mb/s	M-JPEG, MPEG-2 4:2:2	2:1 to 34:1	Yes	FC, SCSI, Ethernet	Up to 8, 48kHz	Yes	1 field	Yes	Non-destructive	Standard Sony gp, Louth	Tape backup
Hewlett-Packard	460	Media-Stream Broadcast Server	On-air	6	N/A		MPEG-2 4:2:0 and 4:2:2		No	FC, 10Base-T	Up to 4, AES/EBU, 48kHz, 16-bit per video channel	Yes on any IBP frame		N/A	N/A	Abit Ltd, Columbine JDS, Computer Engineering, Drake, Louth, Florical, Louth & others	RAID Protection; Redundant PS and fans, rmt diagnostics
	461	Media-Stream Disk Recorder	On-air	5	N/A		MPEG-2 4:2:0 and 4:2:2		No	FC, 10 Base-T	Up to 4, AES/EBU, 48kHz, 16-bit per video channel	Yes on any IBP frame		N/A	N/A	See above	RAID Protection; Redundant PS and fans, rmt diagnostics
Mountain-gate	462	Centra-Vision	Production	Many	Many	Many GB/s	Uncompressed	N/A	N/A	FC	2 analog	Yes	1 field	Yes	Destructive	Full TCP/IP support	RAID-1
Pluto Technologies Int'l	463	Video-SPACE	Production	1	Unlimited	100MB/s	Uncompressed	1:1	No	FC, SCSI; Serial HPPI to come	4, 48kHz, 24-bit	Yes	Back-to-back frames	To come	Destructive	Louth protocol to come	RAID-3 data protection, hot swappable drives, background rebuilds dual PS

	464	Hyper-SPACE High-Definition	Production	1	Unlimited	100MB/s	DCT	1:1	Future release	FC, SCSI, Serial HPI to come	4, 48kHz, 24-bit	Yes	Back to back frames	Under investigation	Louth protocol, to come	RAID-3, hot swappable drives, background rebuilds, dual PS
	465	AirSPACE Multi-channel	News	10/server, more by linking multiple servers via FC	Unlimited	100MB/s	DV	25 or 50Mb	No	FC, SCSI, Ethernet, 10-bit CCIR601	8 per video channel, 48kHz, 16 or 24-bit	Yes	Back-to-back frames	To come	Any system using Video Disk Control Protocol (VDCP) or Pluto API	RAID-3, hot swappable drives, background rebuilds, dual PS
Quantel Ltd	466	Clipbox	Post Production	Up to 14		8 x uncompressed 601	Uncompressed (ITU-R 601) and Grid Compression (M-JPEG based)	Uncompressed and/or 5:1 to 20:1	Yes	SDI (with embedded audio), Network interface pending (Clipnet)	4 audio ch/per port, 48kHz/20-bit sample	Yes	1 video frame	N/A	Open rmt control interface and integral clip management system	RAID storage, field mode replay and fully redundant system disk
	467	Cachebox	On-air	4		> 4x50Mb/s	DVCPR0 (25Mb/s) DVCPR0-50 (50Mb/s)	5:1 (DVCPR0) 3:3:1 (DVCPR0-50)	No	SDI, Network interface pending	DVCPR0: 2ch/port, 48kHz DVCPR0-50: 4 ch/port, 48kHz	Yes	1 video frame	No	Open remote control interface and integral clip management system	RAID storage
SeaChange International	468	Broadcast Media-Cluster	On-air	20 I/O per 5-node cluster, scalable to any number of I/O		Up to 4 MPEG-2 codes at 24Mb/s	MPEG-2, 4:2:2P@ML and 4:2:0 MP@ML, mixable	4Mb/s - 24Mb/s	No	270Mb/s SDI, DVB, Fast Ethernet	2 AES/EBU channels per video I/O	Available early 1999	3 seconds	Editing available early 1999	Louth VDP, Omnibus protocols supported, w/ manual playback	RAID-5
Sony	469	FlexSys/-MAV-70	On-air	Up to 10	Up to 32 with option software	370Mb/s	MPEG-2	4:2:2P@ML and MP@ML from 1.5 to 50Mb/s	Yes, 1080i & 720p at 4:2:2P@HL and MP@HL up to 60Mb/s	Baseband, MPEG2 bit-stream, Fibre Channel, Ethernet 100BaseT	4 ch for SD, 8 ch for HD at 48kHz uncompressed pressed	Yes	2.5 seconds	No	Sony playlist, soon, Louth, Drake, Pro-bel, Florical, Cyradis, MicroFirst	RAID-3 storage, hot swappable PS, fans
Tektronix	470	Profile	On-air	1x2, 1x6, 2x4, 8 out	8	Approx. 250Mb/s	M-JPEG, MPEG 4:2:2P@ML	MPEG: 4Mb/s, 4:2:0 or 4:2:2; M-JPEG: up to 48Mb/s		Fibre Channel, SCSI, ATM with Profile video gateway	16/32 channels total, max 16 audio ch/video @48kHz	Yes	1 frame	Yes	Columbine, Florical, Louth, Drake, Omnibus, Alamar, KEOPS, Pro-bel, Crispin, others	Mirrored systems, data tape backup
Vela Broadcast	471	Rapid Access	On-air	1x5	Multiple	90Mb/s	MPEG-2	1.5 - 15Mb/s	No	Fibre Channel, SCSI, 10BaseT Ethernet, 100BaseT Ethernet	2 and 4 channels, 48kHz@20-bits	Yes	2 seconds	No	Louth, Sony, 9-pin	RAID drives/Dual (hot swappable) power supplies
Vibrant Technologies	472	Impression Com-prompter	News	4	Unlimited	800Mb/s per FC-AL	MPEG-2 4:2:2	1-40Mb/s	No	Fibre Channel, SCSI, ATM	2, 64-384kb/s	Yes	1 frame	Yes	Sony 4:2:2, Louth, Odette, Drake	RAID, NT backup, SCSI, tape

Table 1. This table lists key server manufacturers and their products. The information was supplied by respective vendors in response to a questionnaire supplied by BE staff editors. For more information, circle the appropriate free information number (see second column in table) on the Free Info Card on page 115.

SWITCHABLE SDTV/HDTV RECORDING

Sierra Design Labs HD 1.5Plus: a video disk recording system that allows you to record in standard 601 or uncompressed DTV/HDTV video; using four of Sierra's Quickframe video disk recorders with a new Sierra HD processor, you can record up to 120 minutes of uncompressed




HDTV video — or used separately, each Quickframe unit delivers standard D-1/ITU-R BT601-4 video; in HDTV mode, the HD 1.5Plus is a full-specification DTV recorder featuring record and playback of SMPTE 274M/292M 1920x1080 interlaced signals (1080i), with the ability to switch

to SMPTE 296M 1280x720 progressive scan video (720p); the HD 1.5Plus is available in HD capacities starting in 10-minute increments (four times 15 minutes of SDTV) and requires 16 rack units of space with optional eight-channel audio; 702-831-7837; fax 702-831-5710

Circle (250) on Free Info Card

HIGH-QUALITY VIDEO ENCODER

Optibase MPEG MovieMaker: a powerful, single-board MPEG-1 encoder that allows encoded video and audio to be distributed over LAN, T1/T2, ISDN,

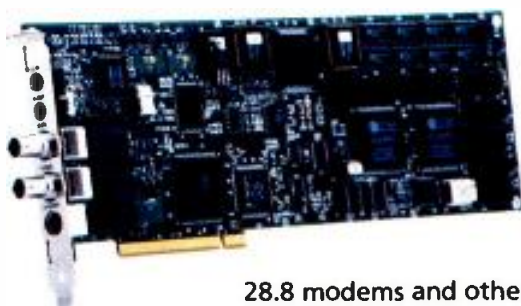

28.8 modems and other communication media; digital filters reduce noise and improve MPEG-1 encoding; variable frame rate encoding allows you to adjust frame rates, and smart muxing removes the jerky motion of low bit-rate frame sampling to provide smooth playback of audio and video; 800-451-5101; fax 408-244-0545; www.optibase.com

Circle (253) on Free Info Card

TEST SYSTEM FOR HDTV

SyntheSys Research BitAlyzerHDTV (model HDVA292): a complete testing solution for high-definition TV signals; the BitAlyzerHDTV offers easy-to-use features by integrating a Windows-NT platform with advanced touchscreen control; it produces real-time error statistics for format errors and includes logic analyzer features for capturing errored data and analyzing it off-line; enhanced diagnostic features include digital waveform display, numeric display and picture mode; the instrument will also support future upgrades; 650-364-1853; fax 650-364-5716; www.synthesysresearch.com



Circle (251) on Free Info Card

ROBOTIC CAMERA TROLLEY SYSTEM

Telemetrics robotic camera trolley system: this enhanced trolley systems features programmable presets, as well as

increased speed and quiet operation; additional benefits include instantaneous setup and shot-recall capabilities; the systems are available in linear, "H" track and vertical configurations and are compatible with the Telemetrics line of pan/tilt mechanisms and controllers, including the TM-CPS control-panel

software; 201-848-9818;

fax 201-848-9819;

www.telemetricinc.com

Circle (252) on Free Info Card



WORKSTATION WITH DUAL-STREAM UNCOMPRESSED VIDEO FOR WINDOWS NT

Intergraph Computer Systems StudioZ GT for SOFTIMAGE/DS: this Intel/windows NT-based workstation delivers dual-stream uncompressed video capability for non-linear production systems; additional enhancements to the new StudioZ GT for SOFTIMAGE/DS feature new display options that allow you to choose between dual 21-inch high-resolution monitors or a single 24-inch monitor; the PCI-based audio processing board supports eight channels of digital I/O and provides up to 16 tracks of simultaneous audio playback, as well as real-time mixing and digital audio effects; 800-763-0242; www.intergraph.com/ics/digitalmedia

Circle (254) on Free Info Card

UNIVERSAL DIGITAL VIDEO ROUTING

Nvision EnVoy series: this series of digital video routing switches features a high-speed crosspoint architecture that will handle data rates in excess of 1.5Gb; this structure is combined with various I/O modules to accommodate several data rates; with Envoy, you can route any standard-rate SDI signals and HD at 1.5Gb, within the same switch at the same time; you can also control the switch from an existing control system; 530-265-1000; fax 530-265-1010

Circle (255) on Free Info Card



DIGITAL MULTITRACK CONSOLE

Solid State Logic Axiom-MT: this digital multitrack console has up to 96 channels and all controls are dynamically automated, including the surround panning on large and small faders; the console features 48 multitrack buses, 12 main mix buses, 12 aux buses and more than 200 mix returns making it ideal for mixing to any format; the audio is kept in the digital domain with precise repeatability of level, EQ and dynamics; 200+ inputs can be controlled from a 48-fader control surface, and, in situations where space is even more limited, smaller frames can be specified; +44 1865 842300; fax +44 1865 842118; www.solid-state-logic.com

Circle (258) on Free Info Card



IOT POWER DEVICES FOR THE DIGITAL TV MARKET

Eimac Division of CPI DX (Digital eXcellence) family: an advanced line of inductive output tubes (IOTs) specifically rated for UHF DTV applications; the family consists of IOTs in liquid and air-cooled versions providing for average power approximately 10kW to 27kW and peak power handling from 40kW to over 110kW; 650-592-1221; fax 650-592-9988; www.eimac.com

Circle (257) on Free Info Card

REAL-TIME DIGITAL VIDEO NETWORKING SOLUTION

Optibase MPEG ComMotion

UDP: an MPEG digital video transmission solution that encodes and sends high-quality MPEG-1 and MPEG-2 streams in real time over a broad range of standard TCP/IP networks; MPEG ComMotion UDP turns a Windows 95/NT PC into a complete transmission system; unicast, multicast and broadcast options allow you to customize videostreams to target a single PC station, a group of virtual stations that share a virtual IP address or to send simultaneously to all client stations; 800-451-5101; fax 408-244-0545; www.optibase.com

Circle (269) on Free Info Card

It *zooms* it
*pan*s
it handles **HDTV**
it outputs *broadcast quality* video.

What more could you ask for in a scan converter?

OK - it's under \$5000—

ZoomConverterHD

new—
from PC Video Conversion



PC Video Conversion
16120 Caputo Drive Suite A Morgan Hill CA 95037
tel 408.779.1280 fax 408.779.7868 email sales@pcvideo.com

Circle (55) on Free Info Card

See us at Siggraph Booth #2908

See us at CEDIA Booth #652

www.pcvideo.com

SMPTE TIME CODE

GENERATOR/READER/INSERTER
ALL IN ONE!!



ES-488

- Continuous size adjustments
2% - 20% screen size
- Continuous position adjustments
Locate anywhere on the screen
- Large LED Display
- 1/30 - 30x play speed
- Jam Sync • User Bits

3 YEAR WARRANTY



(310) 322-2136 FAX (310) 322-8127
142 Sierra St. El Segundo, CA. 90245

Circle (56) on Free Info Card

Plug in to a new type of power supply...

...and power your HMI/MSR lamphead
from standard PAG or Anton Bauer camera
batteries with the Omni Ballast from OpTex.



AVAILABLE IN A
RANGE OF LAMPHEAD
& BATTERY PACKAGES

This innovative and universal ballast unit is compatible with
all major brands of small DC lampheads - 125w, 200w & 270w
HMI/MSR, and can be powered from PAG and Anton Bauer 12V-14V
camera batteries as well as battery belts and boxes.

- Fully dimmable electronic ballast
- Full hot restrike capability
- Safety voltage cut-off limiter
- Battery life indicator
- Lightweight and portable
- Optional mains power supply

Get the power to shine - Contact the OpTex team on +44 (0)181 441 2199.
fax +44 (0)181 449 3646 e-mail info@optextint.com
or read more on www.optextint.com/optext/



US Sales: Bogen Photo Corp. 565 E. Crescent Ave.
PO Box 506, Ramsey, NJ 07446-0506
(201) 818-9500, fax (201) 818 9177



Circle (57) on Free Info Card

PRODUCTS NOW SHIPPING



MPEG-2 VIDEO EDGE DEVICE

Tektronix MS series: this series moves
digital video material between facilities
with higher quality at lower bandwidth; it is suitable
for transmitting contribution-quality video at MPEG-2
4:2:0 or 4:2:2 from a studio to a satellite transmitter,
from an event venue to a studio and/or from one post-
production house to another; the series offers real-
time video streaming over standard networks, includ-
ing the MPEG-2 4:2:2 P@ML and is optimized to main-
tain video and audio quality even through multiple
generations of encoding and decoding; 800-547-8949;
fax 503-627-7275; www.tek.com

Circle (270) on Free Info Card



DUAL-STREAM VIDEO CAPTURE CARD NOW AVAILABLE

Pinnacle Systems ReelTime: a Windows-
based, dual-stream video capture card with onboard
real-time effects available in NTSC and PAL versions;
this comprehensive desktop solution provides 130 real-
time transitions, as well as real-time chroma, luma,
linear keying and titling; it features a scalable architec-
ture that supports Pinnacle Systems' Genie RT option
enabling picture-in-picture motion and hundreds of
digital 3-D effects, including page turns, water ripples,
spheres, hourglass and bumps; composite, Y/C and
component analog I/O interfaces are standard and
optional interfaces include CCIR 601 serial digital and
DV/1394; 650-526-1600; www.pinnaclesys.com

Circle (262) on Free Info Card



NEW SOFTWARE FOR SONY EDITSTATION

**Sony ES-7 EditStation software ver-
sion 1.2:** this new software includes vari-
able audio level settings using graphical "rubber-band"
adjustments on the timeline, a timeline clip editor,
timeline jogging by control-panel job dial, EDL export,
reclip of multiple edit sequences in real time and
inclusion of 38 additional digital effects; the addition-
al features will help editors transition to non-linear;
800-686-SONY; www.sony.com/professional

Circle (263) on Free Info Card



NEW RELEASE OF AVID'S MACINTOSH-BASED DIGITAL VIDEO SYSTEM

Avid Xpress version 2.0: the Avid Xpress
system, formerly MCXpress for Macintosh, is designed
for independent video and multimedia producers; the
new release includes significant enhancements to
graphics and titling, audio, effects, overall editing and
interoperation with third-party products; Xpress ver-
sion 2.0 is available in four new configurations; 978-
640-6789; fax 978-640-1366; www.avid.com

Circle (265) on Free Info Card

The GALLERY

**QUALITY.
RELIABILITY.
EASE OF
OPERATION.**



ENG, SNV and EFP
trucks, vans and trailers

BAF Broadcast Vehicles

TOLL FREE (800) 633-8223

WEB www.bafcom.com

FAX (407) 324-7860 SAT. SPACE (800) 966-3822
E MAIL baf@gate.net WORLDWIDE +(407) 324-8250

Circle (64) on Free Info Card

8-VSB MODULATOR

For HDTV Terrestrial Broadcast System
Conforms to ATSC Specification
All Solid State Construction for High Reliability
Digital Implementation for High Performance
IF or RF Output Options
Accepts MPEG2 Source Input
8-bit Byte Wide Parallel Input Format
Phase Locks Clock to the MPEG2 Source
Clock Lock Indicator
Made in the U.S.A.



KTech Telecommunications, Inc.

15501 San Fernando Mission Blvd.
Suite 100
Mission Hills CA 91345
PH (818) 361-2248 FAX (818) 270-2010
INTERNET: www.ktechtelecom.com
Email: skuh@ktechtelecom.com

Circle (65) on Free Info Card

Multiple Video Windowing Systems & PCI Cards



- Concurrent 4 to 36 Variable Sized Video Windows on XGA Display
- NTSC, PAL, SECAM Non-synchronous Video Source
- Integrated Video Routing Switcher
- Remote Access Control via Ethernet
- Auto Loss of Sync Detection and Visual Alarm
- Brightness, Contrast, Saturation and Hue Adjustment for Individual Window
- Video Source ID and Label
- Windows 95 & NT 4.0 GUI

Avitech International Corp.
Voice: 425-885-3863 • Fax: 425-885-4726

Circle (63) on Free Info Card

**SPLIT
IT!!**

HENRY ENGINEERING

503 Key Vista Drive
Sierra Madre, CA 91024 USA
TEL (626) 355-3656 FAX (626) 355-0077
FAX-on-Demand Doc #103 (626) 355-4210
<http://www.henryeng.com>



USDA is a handy 2-in, 4-out stereo "mini-DA" that can *combine* or split audio signals for distribution. Mix stereo to mono, get *both* stereo and mono outputs from a stereo source. Gain trims for each output. Great specs with lots of headroom. *Keep one on hand!*

**HE HENRY
ENGINEERING**

We Build Solutions.

Circle (66) on Free Info Card

Business

WCTV-TV, Tallahassee FL, and WYMT-TV, Hazard, KY, recently made **Panasonic** equipment purchases valued at over \$1.1 million to convert news operations and commercial production to Panasonic DVCPRO. CBS affiliate WCTV received 58 pieces of DVCPRO equipment, comprised of two AJ-LT75 laptop editing systems, 11 AJ-D700 camcorders, 22 AJ-D750 and AJ-D650 studio editing VTRs and 23 AJ-D640 recorder/players. WYMT, a satellite CBS affiliate, purchased 41 units of DVCPRO gear, including an AJ-LT75, eight AJ-D700 camcorders, eight AJ-D750 and AJ-D650 editing VTRs, 11 AJ-D640 recorder/players and 13 AJ-D230 desktop VTRs.

KNWS-TV of Houston, and KLDT-TV of Dallas selected **JVC's** Digital-S as their digital recording format of choice. The two stations are owned by independent broadcaster, Johnson Broadcasting.

In addition, JVC announced that KNTS-TV, an independent start-up station in the greater Natchitoches, LA region, went on air with the Digital-S equipment as its house videotape format. KNTS is a community-based station affiliated with America One Television and owned by CP-Tel Broadcasting, a subsidiary of CP-Tel Holdings Inc., a local telco and Internet provider.

Philo Television purchased the **Quantel** Editbox digital nonlinear on-line editing system for its San Francisco facility. The Editbox, a complete hardware and software package made in England, is a key component in the \$1

million renovation of Philo Television into a technically advanced, state-of-the-art editing boutique in Northern California. In addition to the Editbox, Philo offers four digital Avid Media Composer systems with both off- and on-line video editing capabilities.

Scitex announced that Brown Bag Films used two StrataSphere systems to create the 39-part TV series, *Twilight Works*. The two Scitex StrataSphere digital non-linear finishing workstations were used to complete the Action Heroes and Femme Fatales series of 30-minute celebrity biographies.

Scitex also announced that the Media-One Cable Company acquired nine StrataSphere systems for its seven New England advertising locations.

360 Systems announced the installation of a Short/cut Personal Audio Editor for use on *The Late Show with David Letterman*. Short/cut joins the production's earlier purchase of three DigiCart/II hard disk audio recorders. Short/cut is a self-contained, two-track digital audio editor with built-in hard disk, speakers, a large waveform display and an optional Zip drive. It offers true cut/copy/paste editing, a scrub wheel and conventional tape transport control.

Avid Technology signed a definitive agreement to acquire the SOFTIMAGE subsidiary of Microsoft Corporation. The acquisition will strengthen Avid's presence in the TV market by allowing Avid to offer its customers comprehensive solutions for TV finishing and will add leading 3-D animation technology to Avid's product line. SOFTIMAGE develops 3-D animation, video production, 2-D cel animation and compositing software solutions for creative professionals.

Sony Electronics has integrated its broadcast, production and professional business into a

seamless organization renamed Sony Broadcast and Professional Group (BPG). The business group is designed to meet the rapidly evolving requirements of the digital TV market, at the same time, BPG's sales operation will now be deployed into three zones.

Tektronix announced that it has a newly formed business unit, VideoTele.com, designed to tap into high-growth networking, telecommunications and broadcasting markets. VideoTele.com is a focused unit within the Tektronix Video and Networking Division and capitalizes on the company's position in the TV broadcast and broadband conferencing industries. It provides video communications products to service providers who can deliver Tektronix' broadcast-quality video as a service through its standard network infrastructure for end-users.

NVision announced that it will supply ABC Broadcast Operations a complete routing system for HD-SDI video, four levels of AES audio, time code and machine control. These routers will be controlled by their existing Tektronix SMS7000 control system. The package includes the new Envoy 6128 1.5Gb digital video routing switch that will be loaded initially for 32x32 operation, but with expansion to 128x128. AES audio will be switched via an NV3512 synchronous audio router and time code via a NV3064. Machine control will be accomplished via an NV3128 dynamic port data router.

The CNN News Group will install a **Tektronix** multichannel Profile system at its Atlanta-based CNN Center Operations. The multimillion-dollar project was designed by the Tektronix System Management Group and CNN to facilitate commercial spot delivery for its seven networks. The project will incorporate numerous Tektronix PDR200 MPEG 4:2:2 Profile video file servers, Profile fiber-channel networking, SGI Origin 2000 servers with shared RAID-



3 storage and an Ampex 812 data tape library system. The CNN News Group's Commercial Centralization Project is an expansion of CNN International's Profile system.

Digital Video Systems Inc. has changed its corporate name to **DVS Digital Video Inc.** The company remains a wholly owned subsidiary of the DVS GmbH of Hannover, Germany, and remains responsible for all sales and support of DVS and MMS products in North America. The DVS Digital Video staff, organizations, operations and customer relationships will remain unchanged.

Quantegy hosted a customer-appreciation party during the NAB convention in



Las Vegas at the Harley Davidson Café. Over 1,000 Quantegy professional media users attended the event. Quantegy is headquartered in Peachtree City, GA, with manufacturing facilities in Opelika, AL, and markets Quantegy and Ampex brand professional audio, video and instrumentation media products.

Solid State Logic announced that its Axiom-MT digital console will be installed in National Mobile Television's (NMT) all-digital HDTV mobile truck. The Axiom-MT, introduced at the recent AES Convention in Amsterdam, is a rugged digital audio platform providing engineers with a familiar work surface while addressing the space requirements of mobile broadcasting. The system will service broadcast audio for the Madison Square Garden Network over the next five years covering Knicks basketball and Rangers hockey games.

Telex has merged with **EV International** and will operate under the name **Telex Communications Inc.** The new company expects to have more than

\$355 million in sales and will employ approximately 3,300 people worldwide to manufacture a complete line of audio, wireless and multimedia communications equipment for its commercial, professional and industrial customers.

Euphonix installed a 104-fader CS3000B for *The Tonight Show With Jay Leno* stage for live-to-tape and on-air broadcast at the Burbank-based studio. The system includes features such as SnapShot Recall, Backstop fader PFL's and HyperSurround planning. NBC required the mixing system's capability to simultaneously broadcast in stereo, 5.1 surround sound or any future DTV or HDTV format.

Silicon Graphics and **Philips Digital Video Systems** announced a strategic alliance to develop mission-critical solutions for the worldwide broadcasting community. Under the terms of the alliance, Philips will integrate specific Silicon Graphics video computing platform software and hardware products into applications and systems that it sells in the broadcasting, cable and news media markets. The first collaboration between the two companies will be Philips' integration of the Silicon Graphics Origin200 server into its NewsBreaker news editor. Philips will also develop asset management applications with Silicon Graphics StudioCentral digital asset management software.

People

Robert Mueller has been named president of Panasonic Broadcast & Digital Systems Company, Secaucus, NJ.



Mel Lambert has been appointed to the newly created position of international marketing director at Otari Corporation, Foster City, CA.

Hewlett-Packard, Palo Alto, CA, has named **Edward W. (Ned) Barnholt**, HP executive vice president and general

manager of the Test and Measurement Organization, to head a newly created Measurement Organization, formed by merging the Test and Measurement Organization and the Measurement Systems Organization.

In addition, **Lewis E. Platt**, HP chairman, president and CEO, will oversee Computer Organization on an interim basis.

Stephen King has been named vice president and general manager of Tektronix' newest business unit, VideoTele.com.

Lawrence S. Brody was elected president and chairman of the board at Communications Engineering Inc., Newington, VA.



The GALLERY

LEIGHTRONIX, INC.

MVP 2000



- MPEG video and audio player with built-in hard drive storage
- Built-in 4x3 video and stereo audio matrix switcher
- PRO-BUS VCR control for up to 16 VCRs
- Stand-alone, full-featured Event Controller operation
- Manageable via network, modem or direct serial connection
- Only one rack unit in height!

Contact **LEIGHTRONIX** for your communications control solution!

- In-house communication networks/CCTV
- Kiosks/information centers ■ LPTV/MATV
- Public/educational/government access cable television

LEIGHTRONIX, INC.

2330 Jarco Drive ■ Holt, MI 48842
517-694-8000 ■ Fax: 517-694-1600
e-mail: info@leightronix.com ■ www.leightronix.com

Circle (58) on Free Info Card



THE PROFESSIONAL'S SOURCE FOR PHOTO,

FOR ORDERS CALL:

800-947-9928

212-444-5028

OR FAX (24 HOURS):

800-947-9003

212-444-5001

Store & Mail Order Hours:

Sunday 10-5

Monday thru Thursday 9-7

Friday 9-2 • Saturday Closed

On the Web: <http://www.bhphotovideo.com>


OUR NEW EXPANDED LOCATION



420 Ninth Avenue

Between 33rd and 34th Streets
New York, N.Y. 10001


Sun. 10-5, Mon. thru Thurs. 9-7
Fri. 9-2, Sat. Closed

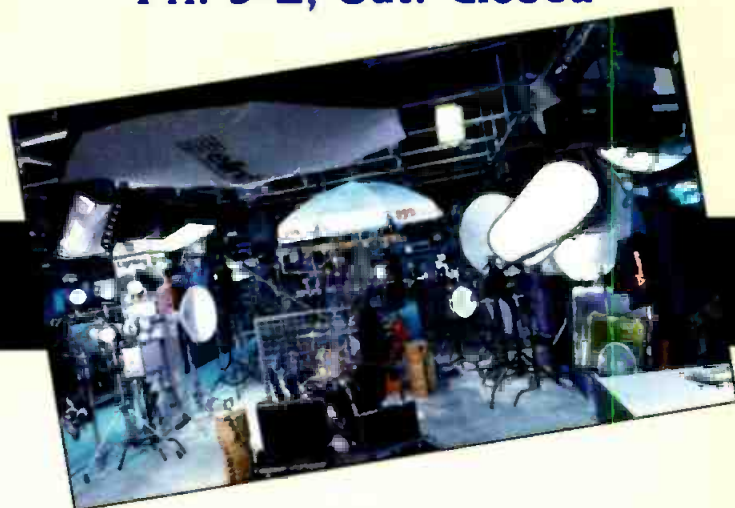

FOR A FREE MONTHLY CATALOG, CALL 800-947-6933, 212-444-6633 OR WRITE

www.americanradiohistory.com

VIDEO and PRO AUDIO



TO INQUIRE ABOUT YOUR ORDER:
800 221-5743 • 212 239-7765
OR FAX 24 HOURS:
800 947-2215 • 212 239-7549

New Address:
420 Ninth Ave. (Bet. 33rd & 34th St.)
New York, N.Y. 10001

SONY

DSR-200A 3-CCD Digital (DVCAM) Camcorder



Combining a compact and lightweight body with the superior picture quality of DSP (Digital Signal Processing) and the DVCAM format, the DSR-200A is the ideal acquisition tool for video journalists, event and wedding videographers, stringers and production houses. 500 lines of horizontal resolution, 48kHz or 32kHz digital audio, three hour record time, and minimum illumination of 3 lux is only the beginning. Other features include 16/9/4:3 capability, Steady Shot, high resolution 1-inch viewfinder, time code operation, time/date superimposition and an IEEE-1394 interface for direct digital output. Offers full automatic as well as manual control of focus, iris, gain, white balance and shutter speed.

- Variable servo 10X optical power zoom lens goes from 5.9 to 59mm in 1.7 to 24 seconds. The manual zoom rocker is continuously variable right up to where the digital 20X zoom begins.
- Sony's Super Steady Shot reduces high frequency camera shake without compromising image quality. SteadyShot uses horizontal and vertical motion sensors that allow it to work accurately while zooming, moving (even shooting from a car), and shooting in low light conditions.
- Has digital effects including audio and video fade, overlap and Slow Shutter.
- Automatic and manual focus, iris, shutter, gain and white balance. All is adjustable in 12 levels from F1.6 to F11, shutter from 1/4 to 1/10,000 of a second in 12 steps. Gain from -30dB to +180dB in 8 steps.
- Zebra Pattern indicator, built-in ND filter.
- Custom Preset function lets you preset, store and recall custom settings for color intensity, white balance (bluish or reddish), sharpness and brightness.
- Stores Photo, Date/Time, Shutter Speed, Iris, Gain and F-stop for easy recall. So if you have to re-shoot, you know your original settings for every scene and frame.

- Records Drop/Non-Drop Frame time code. Time code can be read either as RC time code or as SMPTE time code.
- Has a large 1-inch B&W viewfinder with 550 lines of resolution for easy focusing even in low contrast lighting situations. Separate information sub panel displays time code, battery time, tape remaining and other camcorder functions without cluttering up the viewfinder.
- Records 16-bit/48kHz audio on one stereo track or 12-bit/32kHz with two pairs of stereo tracks (L1/R1, L2/R2), so you can add stereo music or narration.
- One-point stereo electret condenser mic for clear stereo separation. Directivity can be selected from 0°, 90° & 120°.
- Automatic & manual (20-step) audio level record controls. Monitor audio with headphones or from the LCD panel which has an active VU meter.
- XLR input connectors for mics and audio equipment.

DSR-200A Field Package:

- DSR-200A Camcorder • NPA-1000/B Battery Case Adapter
- 3 NP-F930/B 7.2v 4000 mAh Batteries
- AC-V900/B AC Adapter, Triple Battery Charger
- VCT-U14 Tripod Adapter • LC-2000CP System Case



DSR-30 DVCAM Digital VCR

The DSR-30 is an industrial grade DVCAM VCR that can be used for recording, playback and editing. DV standard 4:1:1 sampling digital component recording with a 5:1 compression ratio provides spectacular picture quality and multi-generation performance. It has a Control L interface for editing with other Control L based recorders such as the DSR-200A DVCAM Camcorder or another DSR-30. It also has a continuous auto repeat playback function making it ideal for kiosks and other point of information displays. Other features include high quality digital audio, IEEE-1394 digital interface and external timer recording. The DSR-30 can accept both Mini and Standard DVCAM cassettes for up to 184 minutes of recording time, and can playback consumer DV tapes as well.

- Records 24 digital audio at either 48kHz (16-bit 2 channel) or at 32kHz (12-bit 4 channel).
- Equipped with Control L, the DSR-30 is capable of SMPTE Time Code based accurate editing even without an edit controller. Built-in editing functions include assemble and separate video and audio insert.
- By searching for either an Index point or Photo Data recorded by the DSR-200A camcorder, the DSR-30 drastically cuts the time usually required for editing. The DSR-30 can record up to 135 Index points on the Cassette Memory thanks to its 16K bits capability.
- Audio lock ensures audio is fully synchronized with the video for absolute precision when doing an insert edit.
- Built-in control tray has a jog/shuttle dial, VCR and edit function buttons. The jog/shuttle dial allows picture search at 1/5 to 15X normal speed and controls not only the DSR-30 but also a player hooked up through its LANC interface.
- DV In/Out (IEEE 1394) for digital dubbing of video, audio and data ID with no loss in quality.
- Analog audio and video input/outputs make it fully compatible with non-digital equipment. Playback compatibility with consumer DV tapes allows you to work with footage recorded on consumer-grade equipment. Tapes recorded in the DSR-30 are also compatible with Sony's high-end DVCAM VCRs.

PVM-14N1U/14N2U & 20N1U/20N2U 13-inch and 19-inch Presentation Monitors

With high quality performance and flexibility, Sony's presentation monitors are ideal for any environment. They use Sony's legendary Trinitron CRT and Beam Current Feedback Circuit for high resolution of 500 lines as well as stable color reproduction. They also accept worldwide video signals, have a built-in speaker and are rack mountable. The PVM-14N1U/20N1U are designed for simple picture viewing, the PVM-14N2U and 20N2U add RGB input and switchable aspect ratio. **They Feature:**



- Picture (chrome, phase, contrast, brightness) and setup adjustments (volume, aspect ratio) are displayed as easy-to-read on screen menus.
- Closed captioning is available with the optional BKM-104 Caption Vision Board.
- PVM-14N2U/20N2U Only:
- (Last Input Switch) - Contact closure remote control allows you to wire a remote to an existing system so that the monitor's input can be remotely controlled to switch between the last previously selected input and the current input.
- 4:3/16:9 switchable aspect ratio

PVM-14M2U/14M4U & 20M2U/20M4U 13-inch and 19-inch Production Monitors

Sony's best production monitors ever, the PVM-M Series provide stunning picture quality, ease of use and a range of optional functions. They are identical except that the "M4" models incorporate Sony's state-of-the-art HR Trinitron CRT display technology and have SMPTE C phosphors instead of P22.

- HR Trinitron CRT enables the PVM-14M4U and 20M4U to display an incredible 800 lines of horizontal resolution. The PVM-14M2U and 20M2U offer 600 lines of resolution. M4 models also use SMPTE C phosphors for the most critical evaluation of any color subject.
- Dark tint for a higher contrast ratio (black to white) and crisper, sharper looking edges.
- Each has two composite, S-Video and component input (R-Y-B-Y analog RGB). For more accurate color reproduction, the component level can be adjusted according to the input system. Optional BKM-101C (video) and BKM-102 (audio) for SMPTE 259M serial digital input.

- Beam Current Feedback Circuit
- 4:3/16:9 switchable aspect ratio
- True multi-system monitors they handle four color system signals: NTSC, NTSC 4.43, PAL, and SECAM
- External sync input and output can be set so that it will automatically switch according to the input selected.
- Switchable color temp: 6500K (broadcast), 9300K (pleasing picture). User preset (3200K to 10000K).
- Blue gun, underscan and H/V delay capability
- On-screen menus for monitor adjustment/operation.
- Parallel remote control and Tally via 20-pin connector.

SONY UVW-100B

More affordable than ever, the UVW-100B offers 700 lines of horizontal resolution, 60dB S/N ratio, 26-pin VTR Interface, compact design and ease of operation - making it ideal for field shooting applications.




- Three 12-inch IT Power HAD CCDs with 380,000 pixels attain sensitivity of F11 at 2000 lux (low light is 4 lux).
- S/N ratio of 60dB and 700 lines of resolution.
- Gain-up can be preset in 1dB steps from 1dB to 18dB.
- Auto Iris detects the lighting conditions and adjusts for the proper exposure.
- Clear Scan records computer monitors without horizontal bands across the screen. Shutter speed can be set from 60.4 to 200.3 Hz in 183 steps. Also has a variable high speed shutter from 1/100 to 1/2000 of a second.
- SMPTE LTC time code and UB generator/reader. Rec Run/Free Run. Preset/Regen are easily set. For multi-camera operation, genlock to an external time code is provided.

- Genlock input and built-in color bar generator.
- 26-pin VTR interface for feeding component, composite and S-Video signals to another VTR for simultaneous recording. Start/stop are controlled and external VTR status such as Rec and Tally are shown in the viewfinder.
- Diecast aluminum, 1.5-inch DXF-601 viewfinder is rugged yet comfortable while providing 600 lines of resolution.
- Large diameter eye cup reduces eye strain and simplifies focusing. Dropter adjustments (-3 to 0) compensates for differences in eye sight.
- Zebra level indicators, safety zone and center marker generator. Shows tape remaining and audio levels.
- 8-digit LCD display indicates time data, warning indications and video status. Battery status audio level are also shown in a bar graph meter.
- With Anlon/Bauer Digital Batteries remaining battery power is displayed on the LCD panel and through the viewfinder.
- Weighs 15lb. with viewfinder, battery, tape and lens. Shoulder pad is adjustable, so you maintain optimum balance when using different lenses and batteries.

UVW-1200/UVW-1400A Betacam SP Player • Player/Recorder

The UVW-1200 and UVW-1400A are non-editing VCRs which deliver Betacam SP quality and offer features for a wide range of playback and recording applications. RGB and RS-232 interface make them especially ideal for large screen, high quality video presentation, scientific research and digital video environments.

- Ideally suited for work in computer environments, because RGB signals can be converted into component signals and vice versa with minimum picture degradation.
- 25-pin serial interface allows external computer control of all VCR functions based on time code information. Baud rate can be selected from between 1200 to 38,400 bps.
- Built-in Time Base Stabilizer (TBS) locks sync and subcarrier to an external reference signal as well as providing stable pictures. High quality digital dropout compensator further ensures consistent picture performance.
- Equipped with two longitudinal audio channels.
- Both read LTC Time Code and UB (User Bits). The UVW-1400A also generates LTC and UB (Free-Run/Rec-Run).
- Built-in character generator can display VTR status, time code, self-diagnostic messages, set-up menu, etc.

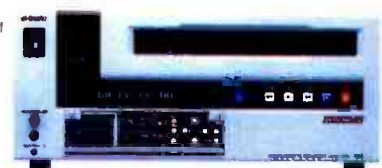

- Auto repeat of entire or a specific portion of the tape.
- Control of jog, shuttle, playback, record, pause, FF and REW with the optional SVRM-100A Remote Control Unit.
- Composite and S-Video as well as component via BNCs which are switchable to RGB output. The UVW-1400A has two switchable sync connectors and a Sync on Green.
- Built-in diagnostic function and hour meter.
- Initial set-up menu for presetting operational parameters. Settings are retained even after power is turned off.

UVW-1600/UVW-1800 Betacam SP Editing Player • Betacam SP Editing Recorder

The UVW-1600 and UVW-1800 are the other half of the UVW series. They offer the superiority of Betacam SP with sophisticated editing features. They feature an RS-422 9-pin interface, built-in TBCs and Time Code operation. Inputs/outputs include component, composite and S-Video. **All the features of the UVW-1200/1400A PLUS—**

- Optional BVR-50 allows remote TBC adjustment.
- RS-422 interface for editing system expansion.
- Two types of component output, via three BNC connectors or a Betacam 12-pin dub connector.

- Frame accurate editing is assured, thanks to sophisticated servo control and built-in time code operation. In the insert mode of the UVW-1800, video, audio Ch-1/2 and time code can be inserted independently or in any combination.

PVW-2600/PVW-2650/PVW-2800 BETACAM SP 2000 PRO SERIES

Whenever versatility and no compromise performance is needed, there is only one choice. Legendary reliability and comprehensive support for its many users has established the PVW series as the standard in broadcast and post production. The PVW Series includes the PVW-2600 Player, PVW-2650 Player with Dynamic Tracking and the PVW-2800 Editing Recorder. They feature built-in TBCs, LTC/VITC time code operation and RS-422 serial interface. They also offer composite, S-Video and component video inputs and outputs. Most important they are built for heavy, every day duty.

- Built-in TBCs and digital dropout compensation assure consistent picture performance. Remote TBC adjustment can be done using the optional BVR-50 TBC Remote Control.
- The PVW-2600, PVW-2650 and PVW-2800 (generates as well) read VITC/LTC time code as well as User Bits. Ext/Int time code, Regen/Preset, or Rec-Run/Free-Run selections.
- Built-in character generator displays time code or CTL data.
- Set-up menu for presetting many functional parameters.



- PVW-2650 Only**
- Dynamic Tracking (DT) playback from -1 to +3 times normal speed.

- Two longitudinal audio channels with Dolby C-type NR.
- Recognizable monochrome pictures at up to 24X normal speed in forward and reverse. Color at speeds up to 10X.
- Two types of component connection: three BNC connectors or a Betacam 12-pin dub connector. They have composite and S-Video signals as well.

- PVW-2800 Only**
- Built-in comprehensive editing facilities
- Dynamic Motion Control with memory provides slow motion editing capability.

UHF WIRELESS MICROPHONE SYSTEMS



Consisting of 5 handheld and bodypack transmitters and 6 different receivers, Sony's UHF is recognized as the outstanding wireless mic system for professional applications. Operating in the 800 MHz band range, they are barely affected by external noise and interference. They incorporate a PLL (Phase Locked Loop) synthesized control system that makes it easy to choose from up to 282 operating frequencies, and with the use of Sony's pre-programmed channel plan, it is simple to choose the correct operating frequencies for simultaneous multi-channel operation. Additional features, like space diversity reception, LCD indicators, reliable and sophisticated circuit technology ensure low noise, wide dynamic range, and extremely stable signal transmission and reception. Ideal for broadcasting stations, film production facilities, and ENG work.

SEVEN DAY CUSTOMER SATISFACTION GUARANTEE

Circle (67) on Free Info Card

www.americanradiohistory.com



THE PROFESSIONAL'S SOURCE FOR PHOTO,

FOR ORDERS CALL:

800-947-9928

212-444-5028

OR FAX (24 HOURS):

800-947-9003

212-444-5001

**MOST ORDERS SHIPPED
WITHIN 24 HOURS**

OVERNIGHT SERVICE AVAILABLE

On the Web: <http://www.bhphotovideo.com>

Panasonic

WJ-MX50
Digital A/V Mixer



- Four input switcher and any two sources can be routed to the program buses. Two-channel digital frame synchronization permits special effects in each A/B bus.
- Combination of 7 basic patterns and other effects creates 287 wipe patterns. External edit control input for RS-232 or RS-422 serial controls. Also has GPI input.
- Wipe boundary effects: soft/border (bold, eight background colors available). Digital effects: strobe, still mosaic, negative, positive, paint, B&W, strobe, trail, and AV synchro.
- Real-time compression - entire source image is compressed inside a wipe pattern.
- Fade-in and fade-out video, audio, titles individually or synchronously faded. Down Stream keyer with selectable sources from character generator or external camera.
- Scene Grabber - moves a pattern while upholding the initially trimmed-in picture integrity.
- Eight separate memories enable instant recall of frequently used effects. 8 preset effects including: Mosaic Mix, Position Stream, Corkscrew, Bounce, Flip, Shutter, Vibrate, and Satellite. Audio mixing capability of 5 sources with 5 audio level adjustments.

Canon

IF+ Series Zoom Lenses

Canon's IF+ family of lenses are engineered to meet the needs of the next generation of broadcasting while meeting the standards of today. Besides having the widest wide angle lens available, the IF+ lens series have wider angles at shorter M.O.D. (Minimum Object Distance), provide higher MTF performance and incorporate Hi-UD glass for reduced chromatic aberration. In addition to superb optics they're all designed with Canon's "Ergonomic Grip" for fatigue-free shooting over an extended time. IF+ lenses are your assurance of unsurpassed quality and performance for today and tomorrow.



J15ax8B

A next generation internal focusing lens with the shortest MOD and widest angle of any standard lens, the J15ax8B IRS/IAS is a standard ENG lens that lets you shoot in tight or restricted areas at the closest minimum object distance ever possible and capture more of the subject. It incorporates all the great features of IF+ lenses including a built-in 2X extender, high MTF performance, Hi-UD glass, square lens hood and Canon's "Ergonomic Grip".

J20ax8B IRS/IAS

Excellent for ENG, sports and production, the J20ax8B IRS/IAS lets you squeeze in shots from 8mm and still take you all the way out to 320mm with its built-in extender. Incorporates all IF+ features, plus is the only lens (besides the J9ax5 28 IRS/IAS) with a Vario-Polar lens hood, enabling rotation of attached filters.



V-16 AND V-20

Camera Stabilization Systems

The V-16 and V-20 allow you to walk, run, go up and down stairs, shoot from moving vehicles and travel over uneven terrain without any camera instability or shake. The V-16 stabilizes cameras weighing from 10 to 20 pounds and the V-20 from 15 to 26 pounds. They are both perfect for shooting the type of ultra-smooth tracking shots that take your audience's and client's breath away instantly adding high production value to every scene. Whether you are shooting commercials, industrials, documentaries, music videos, news, or full length motion pictures, the Glidecam "V" series will take you where few others have traveled.



sachtler

Sachtler quality is available to low budget users. The price of a CADDY system includes the 7-step dampened CADDY fluid head, ultra-light but rugged carbon fiber tripod, lightweight spreader and either a soft bag or cover. The CADDY fluid head features an adjustable pan arm, 7-step adjustment for quick counter balance and the self-locking Sachtler Touch and Go System.

CADDY systems

- CAD 01 Single-Stage ENG Carbon Fiber System:
 - CADDY Fluid Head - ENG Single-Stage Carbon Fiber Tripod
 - SP 100 Lightweight Spreader - Transport Cover 100
- CAD 2A 2-Stage ENG Carbon Fiber System:
 - CADDY Fluid Head - ENG 2-Stage Carbon Fiber Tripod
 - SP 100 Lightweight Spreader - Soft padded ENG Bag

MILLER Fluid Heads and Tripods

Miller 20-Series II Fluid Head

- Dynamic fluid drag control
- Sliding/quick release camera platform
- Weights 4 lbs., handles up to 22 lbs.
- Counterbalance system compensates for nose heavy or tail heavy camera configurations and permits fingertip control of the camera throughout the tilt range
- Includes independent pan and tilt locks, bubble level, dual pan handle carriers and integrated 75mm ball leveling



Miller 25-Series II Fluid Head

- 100mm ball level fluid head
- Robust, lightweight, low profile design
- Quick release camera platform - Weights 7lbs., handles up to 25 lbs.
- Multi-step fluid drag system and integrated counterbalance system provide ultra-smooth, repeatable pan-and-tilt fluid control and finger-tip camera balance for ENG camcorders, industrial CCD cameras or small studio cameras

#601-Lightweight Tripod

- Weights 4.5 lbs., supports up to 30 lbs.
- Minimum height down to 24" maximum height to 57"
- Folds down to 33" - Engineered from thermoplastic moldings, diecast alloy and hard anodized tubular alloy.
- Fast, one turn, captive leg locks
- Includes 75mm (3") ball leveling bowl

#649-2-Stage Tripod

- Two extension sections on each leg. Operates at low levels as well as normal heights without the use of mini legs
- High torsional rigidity, no pan backlash
- Weights 6 lbs., supports 50 lbs. - Very portable, folds to 27"
- Includes 75mm (3") ball leveling bowl

- System 20 #338 - Miller 20 Head, 601 Lightweight Tripod, On Ground Spreader
- System 20 ENG #339 - Miller 20 Head, 649 2-Stage Aluminum, On Ground Spreader
- System 25 #500 - Miller 25 Head, 611 Lightweight Tripod, On Ground Spreader
- System 25 ENG #502 - Miller 25 Head, 641 2-Stage Aluminum, On Ground Spreader

Vinten

Vision SD 12

Pan and Tilt Head with Serial Drag

- The Vision SD 12 head features "Serial Drag" pan and tilt system. System consists of a unique, permanently-sealed fluid drag and an advanced lubricated friction drag. You achieve the smoothest pans and tilts regardless of speed, drag setting and ambient temperature.
- Patented spring-assisted counter-balance system permits perfect "hands-off" camera balance over full 180° of tilt
- Instant drag system breakaway and recovery overcome inertia and friction for excellent "whip pans"
- Consistent drag levels in both pan and tilt axes
- Flick on, flick off pan and tilt camper disc brakes
- Greater control, precision, flexibility and "touch"
- Touch activated, time delayed illuminated level bubble
- Working conditions from as low as -40° up to +60°C
- SD 12 weighs 6.6 lbs. and supports up to 35 lbs.

Vision 12 Systems

Vision 12 systems include #3364-3 SD 12 dual fluid & lubricated friction drag pan/tilt head, single telescoping pan bar & clamp with 100mm ball base.

SD-12A System

- SD-12 pan and tilt head
- 3513-3 Single stage ENG tripod with 100mm bowl
- 3363-3 Lightweight calibrated floor spreader

SD-12D System

- SD-12 pan and tilt head
- 3513-3 Two-stage ENG tripod with 100mm bowl
- 3314-3 Heavy-duty calibrated floor spreader

Vision Two Stage ENG and LT Carbon Fibre ENG Tripods

- The ultimate in lightweight and innovative tripods, they are available with durable tubular alloy (Model #3513) or the stronger and lighter axially & spirally wound carbon fiber construction (Model #3523). They incorporate torque safe clamps to provide fast, safe & self-adjusting leg clamps
- "Torque Safe" requires no adjustment. Its unique design adjusts itself when required, eliminating manual adjustment and maintenance and making for a much more reliable clamping system
- New joint eliminates play and adds rigidity
- They both feature 100mm leveling bowl, fold down to a compact 28" and support 45 lbs.
- #3513 weighs 6.5 lbs. #3523 CF (Carbon Fibre) weighs 5.2 lbs.

VIN-5ST and VIN-10ST

- Compact & lightweight, they maintain Vision performance and quality
- Provide total stability and durability with payloads up to 33 lbs.
- VIN-5ST includes Vision 5SL head, single stage toggle clamp tripod spreader and soft case
- VIN-10ST includes Vision 10SL head, single stage toggle clamp tripod spreader and soft case

Anton Bauer

DIGITAL
Gold Mount Batteries

Acknowledged to be the most advanced battery in the industry, the Logic Series DIGITAL batteries deliver the feature most requested by cameramen: a reliable and accurate indication of remaining battery power.

DIGITAL PRO PACS

The ultimate professional video battery and recommended for all applications. The premium heavy duty Digital Pro Pac cell is designed to deliver long life and high performance even under high current loads and adverse conditions. Its size and weight creates perfect shoulder balance with all camcorders.

- DIGITAL PRO PAC 14 LOGIC SERIES NICAD BATTERY**
14.4v 60 Watt Hours 3 1/8 lbs. Run time: 2 hours @ 27 watts, 3 hrs. @ 18 watts
- DIGITAL PRO PAC 13 LOGIC SERIES NICAD BATTERY**
13.2v 55 Watt Hours 4 3/4 lbs. Run time: 2 hours @ 25 watts, 3 hours @ 17 watts

DIGITAL TRIMPAC

Extremely small and light weight, the Digital Trimpac still has more effective energy than two NP style slide-in batteries. High voltage design and Logic Series technology eliminate the problems that cripple conventional 12 volt slide-in type batteries. The professional choice for applications drawing less than 24 watts.

- DIGITAL TRIMPAC 14 LOGIC SERIES NICAD BATTERY**
14.4 v 43 Watt Hours 2 3/4 lbs.
Run time: 2 hours @ 20 watts, 3 hours @ 13 watts

InterActive 2000 Power/Chargers

QUAD 2702/2401

Four-Position Power/Chargers

The lightest (and slimmest)

full featured four position chargers ever. They can fast charge four Gold Mount batteries and can be expanded to charge up to eight. They allow power from any AC main all in a package the size of a notebook computer and weighing a mere four lbs! The 40 watt 2401 can charge ProPacs in two hours and Trimpacs in one. Add the Diagnostic/Discharge module and the QUAD 2401 becomes an all purpose power and test system. The 70 watt QUAD 2702 bundles all Power/Charger features in the ultimate professional power system.



Dual 2702/2401

Two-Position Power/Chargers

The DUAL 2701 (70 watt) and 2401 (40 watt) are sleek, rugged and economical two position Power/Chargers that have all the features of InterActive 2000 technology including DC camera output and LCD display. The DUAL 2701 will charge any Gold Mount battery in one hour. The DUAL 2401 charges ProPac batteries in two hours and Trimpacs in one. Their compact, lightweight package design makes them the ultimate travel Power/Chargers. They can also be upgraded with the Diagnostic/Discharge Module and/or with the Expansion Charge Modules to charge up to six batteries of any type.



PROFESSIONAL VIDEO TAPES



Professional Grade VHS			
PG-30	2.39	PG-60	2.59
BGR-30	3.59	BGR-60	4.29
ST-30	6.99	ST-60	7.49
Broadcast Grade VHS Box			
H471S S-VHS Double Coated			
PG-120	2.79	BGR-120	4.99
ST-120	7.99		
M221 Hi 8 Double Coated			
Metal Particles		Metal Evaporated	
P630HMP	4.99	E630HME	8.39
P660HMP	6.49	E660HME	10.49
P6120HMP	8.49	E6120HME	13.99
M321SP Metal Betacam (Box)			
05S	17.95	10S	18.49
30S	22.95	60L	31.95
DP121 DVC Pro			
12M (Med)	8.29	23M	9.79
63M	22.49	64L (Lg)	23.99
123L			43.99

maxell

Hi8 Metal Particle (XRM)

P6-120 XRM			
Broadcast Quality Hi8 Metal Particle			
P6-30 HM BQ	5.39	P6-60 HM BQ	6.09
P6-120 HM BQ			7.99
PA PLUS VHS			
T-30 Plus	1.69	T-60 Plus	1.99
T-120 Plus		T-160 Plus	2.09
HGX-PLUS VHS (Box)			
HGXT-60 Plus	2.69	HGXT-120 Plus	2.99
HGXT-160 Plus			3.99

BQ Broadcast Quality VHS (Box)			
T-30 BQ	5.49	T-60 BQ	6.19
T-120 BQ			7.39
BQ Professional S-VHS (In Box)			
ST-31 BQ	7.19	ST-62 BQ	7.99
ST-126 BQ	8.39	ST-182 BQ	17.49

Betacam SP			
B5MSP	15.75	B10MSP	17.75
B30MSP	16.99	B60MSP	27.99
		B90MSP	39.99

Panasonic

Mini DV Tapes			
AV DVM-30	9.99	AV DVM-60	11.99
OVCPRO			
AJ-P12M (Medium)	8.49	AJ-P23M	9.99
AJ-P33M	13.49	AJ-P63M	22.99
AJ-P64L (Large)	24.99	AJ-P94L	34.99
AJ-P123L			44.99

SONY

Hi8 Professional Metal Video Cassettes			
P6-30 HMPX	4.59	P6-60 HMX	7.99
P6-60 HMPX	6.59	P6-120 HMX	11.49
P6-120 HMPX	8.89	P6-120 HMX	15.49
PR Series Professional Grade VHS			
T-30PR	2.39	T-60PR	2.59
T-120PR			2.79
PM Series Premier Grade Professional VHS			
T-30PM	3.49	T-60PM	3.99
T-120PM			4.79
BA Series Premier Hi-Grade Broadcast VHS (In Box)			
T-30BA	3.59	T-60BA	3.99
T-120BA			4.79
MQ Master Quality S-VHS (In Box)			
MOST-30	7.49	MOST-60	7.99
MOST-120			8.39

BRS 3/4" U-matic Broadcast Standard (In Box)			
KCS-10 BRS (mini)	8.29	KCS-20 BRS (mini)	8.99
KCA-10 BRS	8.19	KCA-20 BRS	8.69
KCA-30 BRS	9.69	KCA-60 BRS	13.39
XBR 3/4" U-matic Broadcast Master (In Box)			
KCS-10 XBR (mini)	8.79	KCS-20 XBR (mini)	10.19
KCA-10 XBR	9.29	KCA-20 XBR	10.69
KCA-30 XBR	11.99	KCA-60 XBR	15.69
KSP 3/4" U-matic SP Broadcast (In Box)			
KSP-S10 (mini)	9.59	KSP-S20 (mini)	11.09
KSP-10	10.09	KSP-20	11.59
KSP-30	12.99	KSP-60	16.99
BCT Metal Betacam SP Broadcast Master (Box)			
BCT-5M (small)	12.29	BCT-10M (small)	13.29
BCT-20M (small)	13.99	BCT-30M (small)	14.99
BCT-30ML	21.49	BCT-60ML	23.49
BCT-90ML			34.99

Mini DV Tape			
DVM-30EXM w/Chp	15.99	DVM-60EXM w/Chp	19.95
DVM-30EX "No Chp"	12.99	DVM-60EX "No Chp"	14.99
DVM-30PR "No Chp"	9.99	DVM-60PR "No Chp"	12.99
Full Size DV Tape with Memory Chip			
DV-120MEM	26.95	DV-180MEM	34.95
PDV Series Professional DVCAM Tape			
PDVM-12ME (Mini)	19.50	PDVM-22ME (Mini)	22.95
PDVM-32ME (Mini)	24.95	PDVM-40ME (Mini)	26.95
PDV-64ME (Standard)	34.95	PDV-94ME (Standard)	36.95
PDV-124ME (Standard)	39.95	PDV-184ME (Standard)	49.95
PDVN-64N	27.50	PDVN-124N	34.95
PDVN-184N			43.95

Minimum Shipping USA (Except AK & HI) \$6.95, up to 1 lb. Add 75¢ for each additional lb. For Ins. add 50¢ per \$100. © 1998 B&H Photo - Video. Prices are valid subject to supplier prices. Not responsible for typographical errors.

www.americanradiohistory.com

VIDEO and PRO AUDIO



TO INQUIRE ABOUT YOUR ORDER:
800 221-5743 • 212 239-7765
OR FAX 24 HOURS:
800 947-2215 • 212 239-7549

New Address:
420 Ninth Ave. (Bet. 33rd & 34th St.)
New York, N.Y. 10001

NewTek

Calibar 3-Oz. Pocket-Sized Test Generator

The size of a ball point pen and running on a single battery, Calibar is an NTSC test signal generator that packs a rack mount's worth of test equipment into a battery operated instrument. Calibar is the fastest, easiest and most portable way ever to calibrate video equipment. No patch bay racks. Just one cable. So besides giving you fast, accurate readings in the studio, it's perfect for on-site events or trouble-shooting in the field.

- Designed for studio and field operation, it produces 24 test pattern functions at the touch of a button. 10-bit precision digital-to-analog conversion assures highly accurate signals.
- Calibar's combination of low cost, portability and full-featured operation makes it ideal for broadcast engineers, television production facilities and video post houses.

- Tuck Calibar in your pocket and you're ready to go. Touch the button to generate SMPTE color bars, touch it again to calibrate convergence and so on.
- With the supplied AC adapter, it also functions as a black burst generator.



CHYRON PC-CODI & PC Scribe

Text and Graphics Generator and Video Titling Software

PC-CODI incorporates a broadcast quality encoder and a wide bandwidth linear equalizer for the highest quality, real-time video character generation and graphics display. A video graphics software engine running under Windows 95/NT, PC Scribe offers a new approach and cost effective solution for composing titles and graphics that is ideal for video production and display applications. Combined, they are a total solution for real-time character generation with the quality you expect from Chyron.

PC-CODI Hardware:

- Fully anti-aliased displays • Display and non-display buffers
- Less than 10 nanosecond effective pixel resolution
- 16.7 million color selections • Fast, real-time operations
- Character logo and PCX image transparency
- Variable edges: border, drop shadow and offset
- Full position and justify control of character and row
- User definable intercharacter spacing (squeeze & expand)
- Multiple multicrawl speeds • Automatic character kerning
- User definable tab/template fields
- Shaded backgrounds of variable sizes and transparency
- Software controlled video timing



PC-Scribe Software:

- Number of fonts is virtually unlimited. Also supports most international language character sets. Fonts load instantly and the level of anti-aliasing applied is selectable.
- Adjust a wide range of character attributes. Wide choice of composition tools.
- Character words, rows and fields can color flash
- Character rolls, crawls and reveal modes. Speed is selectable and can be auto timed with pauses. Messages can be manually advanced or put into sequences along with page transitions.
- Multiple preview windows can be displayed simultaneously.
- Transitions effects include: cut, fade, push, wipe, reveal, peel, zoom, matrix, wipe, spiral, split, weave and jitter.
- Import elements to build graphics. This includes OLE objects, INtelligent! RGB and TGA with alpha channel. Scribe also imports and exports TIFF, JPEG, PCX, TGA, BMP, GIF, CLP, ASCII, IMG, SGI, PICT and EPS formats.

PC-CODI and PC-Scribe Bundle \$2995.00



TARGA 1000/MCXpress NT

Professional Video Production Workstation

Incorporating the award-winning TARGA 1000 video card and Avid MCXpress NT non-linear editing software, this fully-configured workstation meets the needs of production professionals, corporate communicators, educators and Internet authors.

TARGA 1000 Features:

- The TARGA 1000 delivers high processing speed for video and audio effects, titling and compositing. Capture, edit and playback full-motion, full-resolution 60 fields per second digital video with fully synchronized CD-quality audio.
- Compression can be adjusted on the fly to optimize for image quality and/or minimum storage space. Has composite and S-video inputs/outputs. Also available with component input/output (TARGA 1000 PRD).
- Genlock using separate sync input for working in professional video suites.
- Audio is digitized at 44.1KHz or 48KHz sampling rates for professional quality stereo sound. Delivers perfectly synchronized audio and video.

MCXpress Features:

- The ideal tool for video and multimedia producers who require predictable project throughput and high-quality results when creating video and digital media for training, promotional/marketing material, local television and cable commercials, CD-ROM and Internet/intranet distribution. Based on Avid's industry-leading technology, it combines a robust editing functionality with a streamlined interface. Offers integration with third-party Windows applications, professional editing features, powerful media management, title tool and a plug-in effects architecture. It also features multiple output options including so you save time and money by reusing media assets across a range of video and multimedia projects.

TARGA 1000/MCXpress Turnkey Systems:

- 300-watt, 6-Bay Full Tower ATX Chassis
- Pentium® ATX Motherboard with 512K Cache
- Pentium® II-300 MHz Processor
- Matrox Millennium II AGP 4MB VRAM Display Card
- 64MB SDRAM 168-Pin (DIMM) S-DRAM
- Quantum® Fireball 6.4GB IDE System Drive
- Seagate Barracuda External 9.1GB SCSI-3 Ultra Wide Capture Drive
- Adapter: AHA-2940UW Ultra Wide SCSI-3 Controller Card
- Teac CD-532E 32X EIDE Internal CD-ROM Drive • 3.5" Floppy Drive
- Altec Lansing ACS-48 3-Piece Deluxe Speaker System
- Viewsonic G771 17-inch (1280 x 1024) Monitor (0.27mm dot pitch)
- Focus 2001A Keyboard • Microsoft® MS Mouse
- Windows NT 4.0 Operating System Software
- Avid MCXpress for Windows NT
- Truevision TARGA 1000 or 1000 Pro Video Capture Card



With TARGA 1000 \$7495.00
With TARGA 1000 Pro (component input/output) \$7995.00



KNOX VIDEO

RS4x4/8x8/16x16/16x8/12x2

Video/Audio Matrix Routing Switchers

Knox's family of high performance, 3-channel routing switchers are extremely versatile, easy-to-use and very affordable. Housed in an ultra-thin rack-mount chassis they accept and route (on the vertical interval) virtually any video signal, including off-the-air and non-timebase corrected video. They also route balanced or unbalanced stereo audio. The audio follows the video or you can route the audio separately (breakaway audio). Each of the switchers offers manual control via front panel operation. They can also be controlled remotely by a PC, a Knox RS Remote Controller, or by a Knox Remote Keypad via their RS-232 port. Front panel LEDs indicate the current routed pattern at all times. Knox switchers are ideal for applications such as studio-feed control and switcher input control, plus they have an internal timer allowing timed sequence of patterns for surveillance applications as well.



- Accept and routes virtually any one-volt NTSC or PAL video signal input to any or all video outputs.
- Accept and route two-volt mono or stereo unbalanced audio inputs to any or all audio outputs.
- Video and audio inputs can be routed independently, they don't need to have the same destination.
- Can store and recall preset cross-point patterns. (Not available on RS12x2.)
- Front panel key-pad operation for easy manual operation.
- Can also be controlled by RS-232 interface with optional RS Remote Controller or Remote Keypad.
- Front panel LED indicators display the present routing patterns at all times.
- An internal battery remembers and restores the current pattern in case of power failure.

- Internal vertical interval switching firmware allows on-air switching.
- Housed in a thin profile rackmount 1" chassis.
- Also except the RS12x2 are available in S-Video versions with/without audio.
- Models RS16x8 and RS16x16 are also available in RGB/component version.
- With optional Remote Video Readout, the RS16x8 and RS16x16 can display active routes on a monitor at remote locations, via a composite signal from a BNC connector on the rear panel.
- The RS4x4, RS8x8 and RS16x16 are also available with balanced stereo audio. They operate at 600 ohms and handle the full range of balanced audio up to +4 dB with professional quick-connect self-locking, bare-wire connectors.

LEADER

Manufacturing test and measurement equipment for over 40 years, Leader Instruments is the standard which others are measured against for reliability, performance, and most important—cost effectiveness.

5860C WAVEFORM MONITOR

A two-input waveform monitor, the 5860C features 1H 1V 2H, 2V 1 s/div and 2V mag time bases as well as vertical amplifier response choices of flat, IRE (100 pass) chroma and DIF-STEP. The latter facilitates easy checks of luminance linearity using the staircase signal. A PIX MON output jack feeds observed (A or B) signals to a picture monitor, and the unit accepts an external sync reference. Built-in calibrator and on-off control of the DC restorer is also provided.

5850C VECTORSCOPE

The ideal companion for the 5860C, the 5850C adds simultaneous side-by-side waveform and vector monitoring. Featured is an electronically-generated vector scale that precludes the need for fussy centering adjustments and eases phase adjustments from relatively long viewing distances. Provision is made for selecting the phase reference from either A or B inputs or a separate external timing reference.



5100 4-Channel Component / Composite WAVEFORM

The 5100 handles three channels of component signals, plus a fourth channel for composite signals. In mixed component / composite facilities. Features are overlaid and parade waveform displays, component vector displays, and automatic bow-tie or "shark fin" displays for timing checks. Menu-driven options select format (525/60, 625/50, and 1125/30 HDTV), full line-select, vector calibration, preset front-panel setups and more. On-screen readout of scan rates, line-select, preset numbers, trigger source, cursor time and volts.

5100D Digital Waveform/Vectorscope

The 5100D can work in component digital as well as component analog facilities (and mixed operations). It provides comprehensive waveform, vector, timing and picture monitoring capabilities. Menu driven control functions extend familiar waveform observations into highly specialized areas and include local calibration control, the ability to show or blank SAV/EAV signals in both the waveform and picture, the ability to monitor digital signals in GBR or YCbCr form, line select (with an adjustable window) memory storage of test setups with the ability to provide on-screen labels, flexible cursor measurements, automatic 525/60 and 625/50 operation and much much more.

5870 Waveform/Vectorscope w/SCH and Line Select

A two-channel Waveform/Vectorscope monitor, the microprocessor-run 5870 permits overlaid waveform and vector displays, as well as overlaid A and B inputs for precision amplitude and timing/phase matching. Use of decoded R-Y allows relatively high-resolution DG and DP measurements. The 5870 adds a precision SCH measurement with on-screen numerical readout of error with an analog display of SCH error over field and line times. Full-raster line select is also featured with on-screen readout of selected lines, a strobe on the PIX MON output signal to highlight the selected line, and presets for up to nine lines for routine checks.

5872A Combination Waveform/Vectorscope

All the operating advantages of the 5870 except SCH is deleted (line select retained), making it ideal for satellite work.

5864A Waveform Monitor

A two-input waveform monitor that offers full monitoring facilities for cameras, VCRs and video transmission links. The 5864A offers front panel selection of A or B inputs, the choice of 2H or 2V display with sweep magnification, and flat frequency response or the insertion of an IRE filter. In addition, a switchable gain boost of X4 magnifies setup to 30 IRE units, and a dashed graticule line at 30 units on screen facilitates easy setting of pedestal level. Intensity and focus are fixed and automatic for optimum display. Supplied with an instruction manual and DC power cable.

5854 Vectorscope

A dual channel compact vectorscope, the 5854 provides precision checkout of camera encoders and camera balance, as well as the means for precise genlock adjustments for two or more video sources. Front panel controls choose between A and B inputs for display and between A and B for decoder reference. Gain is fixed or variable, with front panel controls for gain and phase adjustments. A gain boost of 5X facilitates precise camera balance adjustments in the field. Supplied with a DC power cable.

Designed for EFP and ENG (electronic field production and electronic news gathering) operations, they feature compact size, light weight and 12 V DC power operation. Thus full monitoring facilities can be carried into the field and powered from NP-1 batteries, battery belts and vehicle power. Careful thought has been given to the reduction of operating controls to facilitate the maximum in monitoring options with the operating simplicity demanded in field work.

CORPORATE ACCOUNTS WELCOME

Circle (68) on Free Info Card

Professional Services

HDTV Doesn't have to mean
High Dollar TeleVision™.

Check us out at
www.AstreSystems.com

"Say It Better"

See more than 300 tips
(and related books and tapes)
from "gut instincts" expert,
Emmy-winner and former Wall
Street Journal reporter Kare Anderson at
www.sayitbetter.com

JOHN H. BATTISON P.E.
CONSULTING BROADCAST ENGINEER,
FCC APPLICATIONS AM, FM, TV, LPTV
Antenna Design, Proofs, Fieldwork
2684 State Route 60 RD #1
Loudonville, OH 44842
419-994-3849 FAX 419-994-5419



Curtis Chan
President

1307 Shadow Lane, Suite C P.O. Box 5509, Fullerton, CA 92818-0309
Tel 714 447-4993 Fax 714 578-0284 Tgr 714 506-1157
Email cj_chan@chanandassoci.com

IMMAD ECVS

on line **Intime**

Tel: 973 402 0104
Fax: 973 402 0208
www.immad.com

3 Mars Court
Boonton, NJ
USA
07005

REID BROADCAST COMM. INC.

ED REID - PROJECT ENG. SERVICES
RADIO-FM/AM TV-ANALOG/DIGITAL
P.O. BOX 170476
Arlington, Texas 76003

(817) 496-6142 (FAX) 496-5835
E-MAIL RBCI@NKN.NET

Bill Ferster's NewsWire

Summarizes the important news events in the
worlds of multimedia, video, animation, chips, mass
storage and computers. The NewsWire is sent via
email bi-weekly for \$49 per quarter. Please check
out the web site for sample issues and to subscribe
for 1 month free. www.crosslink.net/~bferster

GILMER & ASSOCIATES, INC.

TECHNOLOGY / MANAGEMENT CONSULTANTS

BRAD GILMER
PRESIDENT

2207 RINGSMITH DR
ATLANTA GA 30345
TEL (770) 414 9952
FAX (770) 493 7421
EMAIL bgilmer@gilnet.com

D.L. MARKLEY

& Associates, Inc.
CONSULTING ENGINEERS

2104 West Moss Ave.
Peoria, Illinois 61604
Phone (309) 673-7511 • FAX (309) 673-8128
www.dlmarkley.com
Member AFCEE

Modern Broadcast Solutions, Inc.

Technical Planning - Implementation - Repairs - DTV

"Over 20 Years of Technical Experience"

Don V. Jones

President

P.O. Box 23007 (704) 882-9554 Voice/Fax
Charlotte, NC 28227-0272 Email: donj@vnet.net

INSPECT • PAINT • REPAIR • RE-GUY • LIGHTING • ANTENNA
FEEDLINES • ANALYSIS • ERECT • DISMANTLE • LINE SWEEPING

HERMAN J. JOHNSTON, PRESIDENT
MOBILE (502) 830-2584 • RES. (502) 830-0880
NATIONWIDE TOWER COMPANY

BROADCAST • C.A.T.V. • MICROWAVE
CELLULAR • PCS • WIRELESS TOWERS

P.O. BOX 1829 • HENDERSON, KY 42419-1829
TEL (502) 869-8000 • FAX (502) 869-8500 • hjnwt@aol.com

NETCOM

STATE OF THE ART ENGINEERING
FOR AUDIO AND VIDEO
ENGINEERING DESIGN • DRAFTING SERVICES
CABLE FABRICATION • PRE-WHIPPED CABLES • PANEL RACKS
SYSTEM INSTALLATION • EQUIPMENT SALES

(201) 837-8424

FAX: (201) 837-8384
1465 PAULSON AVE. TEANECK, NJ 07666

Classifieds

For Sale

<http://www.broadcastexchange.com>

The new way to buy and sell preowned broadcast video gear. Free listings. Online database.

1-888-FAX-GEAR Toll-free 24-hour
Fax-on-Demand

Dial toll-free or call +1.310.442.9491 to have the latest hot list sent to your fax!



**Broadcast
Exchange, Inc.**
Tel: 310-442-9491
Fax: 310-442-9491
email: broadcast@bex.com

FREE 44pg Catalog & 80 Audio/Video Applic.



Video & Audio Dist. Amplifier
RGB Sync Dist. Amplifier
OPAMP LABS INC (213) 934-3566
1033 N Sycamore Av LOS ANGELES CA, 90038
<http://www.opamlabs.com>

WhisperRoom INC

SOUND ISOLATION ENCLOSURES

PH: 423-585-5827
FAX: 423-585-5831

E-MAIL: whisper@lcs.com

Vocal Booths
Broadcast Booths
etc...

WEB SITE:
www.whisperroom.com
116 S. Sugar Hollow Road
Morristown, Tennessee 37813



Circle (101) on Free Info Card

AcousticsFirst™
Toll-Free
Number: **888-765-2900**

Full product line for sound control
and noise elimination.
Web: <http://www.acousticsfirst.com>

**Broadcast
ENGINEERING**

**Broadcast
ENGINEERING**

**Broadcast
ENGINEERING**

BROADCAST PRODUCTS



BECK
ASSOCIATES

16024 Central Commerce Dr.,
Austin, TX 78660
1-888-422-8600
FAX: (512) 670-4390

AESIO Digital/Audio Converter Panel
Provides simple conversion between 110 ohm and 75 ohm audio signals transformer coupled. BNC connectors for 75 ohm coax connections. Removeable terminal block connectors for 110 ohm paired audio cable. 32 positions. Two rack units (3.5')... **\$1,245**

TBC-RMT - TBC Remote Control Unit
Remote control of up to 3 TBC's. For use with JVC, Panasonic and Sony. Purchased with 1, 2, or 3 modules. With 3 modules... **\$960**

SCR-4X8-Serial Machine Control Router
Input/Output Twelve rear mounted DB9-F connectors (four controllers, eight devices). EIA RS-422 send and receive. Controls: Twelve lighted pushbuttons for channel assignment... **\$980**

SCP-10-Serial 422 Patch Panel 10 x 10
passive non-normalling serial data patch panel. Two rack units high. Legend strips and 10 patch cords included... **\$350**

Circle (102) on Free Info Card



Glare-Free Viewfinders!

Hoodman guarantees glare-free monitor images in any environment. Hoods sized to fit 2-inch through 21-inch monitors, viewfinders and teleprompters can be shipped to you today! For more information, call

(310) 379-6391

P.O. Box 816, Hemosa Beach, CA 90254

HOODMAN

Circle (103) on Free Info Card

THE 5D VIRTUAL TELEPORT

Serving USA and Canada
Digital and analog video, data

C Band Transponders
available on GEI

Occasional Space
24hr booking
Worldwide Service
Call 1-800-565-1471

Program Payout and Uplink Facility
located in Ottawa, ON, CAN.

Uplink installed at your location, remote
controlled and monitored from ours

KU Band Transportable
Hire/Lease/Sell

Engineering and Technical Services

Call: Grahame Fournier
1-800-267-1221 x152
email: gfournier@5d.com

TWO FIELDFONES Broadcast quality audio using a P.O.T.S phone line. \$2800 for both or perhaps trade for? Ron Reed: 541-926-5738



Help Wanted

MAINTENANCE ENGINEER FT for maintenance/operation of radio/TV studio; transmitter facilities including terminal/STL equipment; & the mechanical/electrical systems located at those facilities. Send cover letter, resumes to Maintenance Engineer Search, WSKG, PO Box 3000, Binghamton, NY 13902. NO CALLS. EOE/AA.

WTAE-TV

The Hearst-Argyle, ABC affiliate in Pittsburgh, is seeking experienced individuals for the following positions:

TV MAINTENANCE ENGINEER: Ideal candidate would be familiar with small-format tape machines, switchers, audio consoles, studio cameras, ENG, SNG, and automation equipment. Should have strong interest in computers and digital technology. Minimum three (3) years' experience. SBE certification preferred. Code #ME-0527.

TV TRANSMITTER SUPERVISOR: Seeking an experienced transmitter maintenance supervisor to operate and maintain all station transmitter facilities. Minimum four (4) years' experience with STL microwave, VHF and UHF transmitters required. Must have excellent record-keeping skills and a good working knowledge of FCC rules. Should have good mechanical skills. FCC General Class License required. Computer experience and SBE certification preferred. Code #TS-0224.

For consideration, send resume and cover letter including source of referral to the applicable Code #, c/o WTAE-TV, 400 Ardmore Blvd., Pittsburgh, PA 15221. No phone calls, please! EOE.

VIDEO MAINTENANCE ENGINEERING TECHNICIAN

To install, repair, maintain, upgrade & operate electronic equipment used in cable TV broadcasts, including microwave transmission equipment. Test audio & video equipment for proper performance & compliance with FCC regulations, diagnosing & correcting any technical problems or malfunctions. Maintains & calibrates instruments used to test equipment. Determines proper test sequences & conditions & records & analyzes test data. Oversees and trains production crew & technicians in use of test equipment. Provides technical advice on instrumentation & equipment procurement. Oversee & enhance clarity of images produced by microwave transmission. Modifies equipment, including power sources as necessary. Requirements: Bachelors degree in Broadcast Technology or EE. No experience required. Candidate must possess demonstrated expertise using impedance analyzer, Huntron tracker 1000, and Tektronix Pathfinder; and demonstrated expertise using waveform monitor/vectorscope & microwave spectrum analyzer. The expertise required must be sufficient to train technical staff and TV production crew to use listed equipment in production conditions. Job Site location: Norwalk, CT. Sal: \$50,189/yr, OT \$27.14/hr. as required. Work schedule: 6am to 3pm, M-F. Send resume & cover letter documenting minimum qualifications to: Attn: Job Order #3212992, Program Support - 3rd fl., CT Dept. of Labor, 200 Folly Brook Blvd, Wethersfield, CT 06109. Applicants will be required to present proof of legal authority to work in the U.S. EOE.

* Studio Exchange *

Burbank

(818) 840-1351 Fax (818) 840-1354

New and Used Video Equipment

Audio/Video Dealer

Starring

Panasonic & Sony

BUY, SELL, TRADE & CONSIGN

816 N. Victory Blvd.

Burbank, CA 91502

email: studioex@ecom.net

www.studio-exchange.com

WANTED CHIEF ENGINEER Growing UHF station in small midwestern market looking for a high energy individual. We need a person that has hands on experience, but can build a great engineering department. The right person should have experience overseeing building projects, good communication skills and the desire to work as part of the team. Send resume to Owl Engineering, 8899 Hastings St. N.E., Minneapolis, MN 55449

Help Wanted

MAINTENANCE ENGINEER WXIA-TV is looking for a maintenance engineer to provide technical support for all station activities with primary support to news operation and programming. Responsibilities include repairing and installing a wide variety of television broadcast equipment. A minimum of five years broadcast maintenance experience or commensurate education and/or experience in a related field required. Must be able to troubleshoot state of the art electronic equipment to component level with minimal supervision. Familiarity with E.N.G. recording, editing and RF equipment is essential. Applicants should also have a solid working knowledge of PCs and typical PC software. Send resume and salary requirements to: WXIA-TV, Attn: Paul Tanton Engineering Supervisor, P.O. Box 77010, Atlanta, GA 30309. No phone calls please. EOE M/F

MAINTENANCE ENGINEER Full time position available 39 miles from Pittsburgh, PA. Requires ability to repair to component level in all aspects of broadcast plant. Knowledge of current computer operating systems a plus. Send resume and salary requirements to: Sondra Nestor, Human Resources, WTOV-TV, Box 9999, Stuebenville, OH 43952. EOE. No phone calls please!

ENGINEERING SUPERVISOR WTTG is seeking an individual with 5 years exp. in a supervisory position at a television station or production facility to supervise and schedule technicians working under a labor agreement. Additionally, this person will participate in the design and implementation of facility equipment changes including digital TV. Candidate should be well versed in PC operating systems and programs. Experience with UHF transmitter is a plus. We offer a competitive salary and benefits package. Please send your confidential resume to: Mary Talley, VP/HR, WTTG/FOX TV 5151 Wisconsin Ave, NW Washington, DC 20016 re: Eng. Supv. EOE/M/F/D/V.

MAINTENANCE TECHNICIAN WTTG has an excellent opportunity for an experienced Maintenance Technician to work in its Washington, DC digital studio facility. Candidate should have at least 5 years experience in installing, repairing, and maintaining analog and digital audio/video systems, computer proficiency and UHF transmitter experience desirable. We offer competitive wages and benefits. Please send your confidential resume to: Mary Talley, VP/HR, WTTG/FOX TV-5151 Wisconsin Ave. NW Washington, DC 20016 re: Maintenance Eng. EOE/M/F/D/V.

MAINTENANCE TECHNICIAN Requires self starter having experience with Beta, VPR-3, PC's and other studio equipment maintenance. Experience with microwave, satellite, VHF & UHF transmitters, CADD ability and FCC General Class License preferred. Contact Marty Peshka, Director of Engineering, WTNH-TV, 8 Elm Street, New Haven, CT 06510. No phone calls please. EOE.

TV ENGINEERS WANTED for satellite television stations in Charlotte NC, Atlanta GA, Houston TX, Las Vegas NV and St. Louis MO. Provide maintenance and monitoring services and report to national program group. TV rf experience required. Microwave and satellite knowledge very helpful. These positions require approximately 6 hours per month. Monthly retainer plus hourly rate. Local residency required for quick response and monitoring. EOE. For further information contact tvjob@hotmail.com.

BROADCAST MAINTENANCE TECHNICIAN NBC O&O in Miami, FL has an excellent opportunity for a team oriented, hands-on broadcast engineer. The candidate must have experience in component level maintenance on all broadcast video and audio equipment. Send resume to Employee Relations Manager, NBC 6, 316 No. Miami Ave., Miami, FL 33128. NBC 6 is an equal opportunity employer.

FOX27 KDEB has an opening for a full-time Maintenance Engineer with solid electronics background, as well as proficiency in installation, service, repair, and operation of electronic and/or TV broadcast equipment. Excellent benefits, inc. 401k. 3000 East Cherry, Springfield, MO, 65802. EOE

ASSISTANT CHIEF ENGINEER WDWB-TV, WB20, Granite Broadcasting is seeking a strong second for its WB affiliate in Detroit. Requires solid maintenance and RF background, minimum 5-7 years experience. Must be able to work for and lead a team. Previous supervisory experience a plus. No phone calls please. Send resume to: Asst. Chief Engineer, WDWB-TV, HR Dept. - BE, 27777 Franklin Rd. #1220, Southfield, MI 48034. WDWB, Granite Broadcasting is An Equal Opportunity Employer.

MAINTENANCE TECHNICIAN WHAS-TV11, Belo station in Louisville, KY is looking for an experienced technician who likes challenges. You should have 3-5 years experience in installation and maintenance of broadcast equipment. Must work well under pressure as part of a team with heavy emphasis to support a winning news operation. Must be a self-starter requiring minimal supervision while producing high quality results. EOE. Send cover letter and resume to: Cindy Vaughan, HR Director, HR 98-5, WHAS-TV, 520 W. Chestnut St., Louisville, KY 40202.

CHIEF ENGINEER KLTJ-TV has an opening for an engineer to oversee all of its broadcast operations. Responsibilities will include the repair and maintenance of the station's transmitter and studio equipment, so experience with broadcast transmitters is necessary. The successful candidate should also be familiar with DTV technology and computer networking. For consideration send your resume to: Andrew Bless, Station Manager, KLTJ-TV, 1050 Gemini, Houston, TX 77058 or fax to 281-212-1022. Equal Opportunity Employer.

ASSISTANT DIRECTOR OF ENGINEERING Major NYSE group television broadcaster seeks a "hands-on" Assistant Director of Engineering for the group, based in Los Angeles. You will work with and travel to all our major market "O&O's". The ideal candidate will have 5-10 years experience as Chief or Assistant Chief Engineer working in UHF stations. Excellent salary and benefits. Fax resume to (310) 348-3659 - EEO

CRAWFORD COMMUNICATIONS Television Maintenance Engineer. Crawford Communications, the premier post production facility in the Southeast, has opportunity for bright, experienced maintenance engineer. Minimum five years experience with online and offline editing systems. Digital and analog tape transport experience required. Windows experience a plus. Submit resume and salary requirement to: J. Fortner, Chief Engineer, CrawfordCommunications, 5354 Plasamour Dr., Atlanta, GA 30324 or jfortner@crawford.com

CHIEF ENGINEER Newschannel 5 is seeking an experienced technical manager to be responsible for the technical stability of the television station and play a significant role in our transition to digital TV. Should have significant experience in broadcast engineering, including maintenance, News, and production operations. A degree in a technically related field is preferred, but not required. Experience with Capital planning and budgeting is a plus. Send a resume to: General Manager, KALB-TV 5, PO Box 951, Alexandria, LA 71309. Newschannel 5 is a Media General station and an EEO Employer. Pre-Employment Drug-Testing required.

BROADCAST TECHNICIANS The National Digital Television Center is looking for broadcast technicians. The successful candidates will have two plus years experience in component level VTR repair (Beta, Digital Betacam, etc.) and video monitor repair. Tektronix Profile and Alamar automation experience highly desirable. A high level of digital and analog audio and video knowledge and computer skills essential. A drug test and background screen will be required of all successful candidates. Send resumes to: TCI-NDTC, 4100 East Dry Creek Road, Room 118/Attn: Rodney Beelow, Littleton, CO 80122. EOE

TELEVISION BROADCASTING MAINTENANCE TECH MIN QUALS: Assoc deg in electronics or equiv. 4-6 years exp in repair and maint of broadcast equip. Must be flexible. **DESIRED QUALS:** Knowledge of analog and digital equip, SONY vtrs, Alamar automation, Satellite & fiber Transmission systems. CAD exp a plus. An interview will be required of all successful applicants. Special accommodations will be made for any interviewee who requires it. TCI requires a pre-employment drug test. E.O.E. Interested applicants, send resume & salary requirement to: TCI-NDTC, 17 Battery Place, suite 232, NY, NY 10004 Attn: HR. No phone calls accepted!

MAINTENANCE ENGINEER Full time maintenance engineer is wanted by production company in Nashville that produces national television programming. Five years broadcast maintenance experience required. Must be able to troubleshoot at the component level and be computer literate. Salary commensurate with experience. Apply to Steve Anderson, Operations Manager, Jim Owens and Associates, 1525 McGavock St., Nashville, TN 37203.

TV BROADCAST OPERATIONS SUPERVISOR Rochester, New York. Supervise, coordinate, and assign operating personnel for air, audio, videotape editing, remotes and production. Successful applicant will exhibit strong leadership skills, minimum five years television broadcast engineering experience, direct supervisory experience, working knowledge of broadcast rules & regulations, degree preferred. Cover letter and resume to: WXXI Human Resources Dept., PO Box 21, Rochester, New York. WXXI is an equal opportunity employer.

ENGINEERING MAINTENANCE TECHNICIAN Able to install, repair and maintain various types of broadcast equipment including, but not limited to: tape machines; switchers; DVE; video monitors; related terminal gear. Odetics TCS-90 knowledge a plus. Able to work w/video servers and Avid systems. Requires two years experience w/live broadcast/ENG; working knowledge of broadcast systems; willing to work nights/weekends; good driving record. Send resume to: Engineering Department MAC America Communications P.O. Box 5068 Phoenix, Arizona 85010

CHIEF ENGINEER KOLO/TV NewsChannel 8, in beautiful Reno, Nv. has an immediate opening for a Chief Engineer. Strong background in transmitters and RF maintenance, familiar with latest technological advances. Willing to lead facility through the conversion to digital and HDTV. Team leadership, good communicator and teacher. Thorough knowledge of computers and computer based systems; Novell and Microsoft, newsroom and studio systems maintenance. Translator and microwave knowledge helpful. Must be fully versed in FCC regulations. General Class FCC license and/or SBE certification is required. Resume to: Faye H. Kitchel, Human Resources KOLO/TV P.O. Box 10,000 Reno, Nv 89510 EEO

CHIEF ENGINEER ZDTV, Your Computer Channel, based in San Francisco, seeks a seasoned, team-oriented, hands-on engineer to be responsible for the studio and broadcast engineering department. You will be responsible for maintaining and installing technical facilities for the studio, maintenance department and air operations management. You will have excellent technical and managerial skills, plus a thorough knowledge of broadcast equipment including satellite transmission, computer and Internet systems. FCC license and college or technical degree or equivalent needed. At least 10 years' broadcast engineering experience preferred. Please send resume to: ZDTV, Attn: Human Resources/BCE, 650 Townsend St., San Francisco, CA 94103. Email: HR@ZDTV.com, fax: 415-551-4501. No phone calls please. An Equal Opportunity Employer.

Manager, Baseband System Maintenance

Home Box Office (HBO) has an excellent opportunity available for an experienced Baseband System Maintenance Manager to work at our New York City Post Production Facility.

The successful candidate will provide engineering expertise and supervisory direction in television production equipment maintenance, system maintenance, equipment repair, management of broadcast and teleproduction equipment and systems.

Position requires extensive communication with equipment manufacturers, equipment vendors and systems integrators. Additional responsibilities require analysis of maintenance systems and procedures, the development of support equipment and specifications for the proper maintenance and operation of our facility. BSEE plus a minimum of 5 years broadcast engineering management experience including budgets, manpower development, technical knowledge of teleproduction equipment, analysis of system problems pertaining to broadcast equipment and systems integration required.

We offer a competitive starting salary and an excellent benefits package including a 401(k) plan. Please send your resume in confidence with salary requirements to: Home Box Office, 1100 Avenue of the Americas, NY, NY 10036. Attn: CBLLI-H3-12B. Home Box Office, a Time Warner Entertainment Company, is an EOE, M/F/D/V.



SALES ENGINEERS

Are you ready for the DTV Transition?

Thomson Broadcast, a leading provider of professional digital broadcast equipment, has immediate opportunities for experienced sales professionals in the Midwest, West, and Mid-Atlantic areas.

Your qualifications should include a college degree or equivalent, a network of sales contacts, and at least five years experience in the Broadcast or Post Production Industries.

Thomson Broadcast will provide you with the technical training and tools to succeed in the sales of digital broadcast equipment. We invite you to be part of the new Digital TV era.

We offer excellent salaries and benefits and an environment that inspires professional achievement. Please send your resume:

THOMSON BROADCAST, INC.
HR Department
49 Smith Street
Englewood, New Jersey 07631
or fax to: 201-569-1511
EOE/M/F/D/V



ENGINEERS Large post production/video duplication facility in Hollywood is looking for engineers to repair and maintain D1's, digital BC's and D2 VTR's or 3/4 inch and VHS VTR's. Full time positions available now. Salary commensurate with experience. Resume to: Classified Ad Coordinator, Broadcast Engineer, Dept. 792, 9800 Metcalf, Overland Park, KS 66212.

the right clients.
the right location.
the right people.

THE SYSTEMS GROUP

a recognized systems integration firm (design/build), is seeking specialized professionals. Located across the river from Manhattan, we are under contract for several high-profile, DTV facilities serving top markets in broadcast/cable.

System Design Engineers: 5+ yrs experience in systems design and engineering (EE or PE a plus); strong foundation in teleproduction systems, technologies and operations; a solid background in or understanding of manufacturing/integration.

Project Managers: 3+ yrs television systems integration; project planning/implementation; strong interpersonal/creative problem solving skills.

Both positions require advanced proficiency in MS Office/AutoCAD.

We offer a competitive compensation and benefits package: high energy work environment; and an established team of dynamic professionals.

Forward resume/salary requirements to:

TSG Human Resources
317 Newark St, Hoboken, NJ 07030
No calls or faxes please



...the right connection.

DTV ENGINEER - HARRIS/PBS DTV EXPRESS: DESTINATION DIGITAL!

UNIQUE: The HARRIS/PBS DTV Express is a traveling road show, sponsored by Harris Corporation and PBS, that demonstrates DTV (including HDTV) to broadcasters throughout the United States. If you have suitable experience and are interested in working with the latest equipment in a dynamic environment, we would like to hear from you.

POSITION: Immediate opening for a highly motivated experienced broadcast engineer for new mobile broadcast truck and state-of-the-art digital television systems. Requires familiarity with transmitter, video, audio, control, and satellite equipment. Recent station experience a plus. Understanding of current digital broadcast technology and knowledge of the ATSC television standard essential. Must be able to present demonstrations and technical training material to broadcasters. SBE TV Certification or FCC General Class license preferred.

Duties will include hands-on digital television system implementation, testing, and trouble-shooting, management of on-site technical and maintenance programs, DTV demonstrations and presentations, coordination of set-up and tear-down of road show.

TRAVEL: Extensive travel will be required. (Usually the schedule will be three weeks of travel and then one week off.)

DURATION: This will be a position lasting approximately 13 months.

URGENCY: Review of resumes will begin immediately.

RESPONSE: If you are interested, please submit your resume and salary requirements to:

Internet: hdunton@harris.com

Fax: 703-739-8080

Mail: DTV Express - Suite 310

Harris Corporation
1201 E. Abingdon Dr.

Alexandria, VA 22314

Attn: Holly Dunton



Federal Bureau of Investigation



The FBI is seeking experienced audio and video engineers for its forensic analysis program. Work involves high profile national security and criminal cases. Positions are located in rural Virginia at the FBI's Engineering Research Facility in Quantico.

Audio Engineers/Examiners with background in broadcasting and signal processing will perform technical analysis of audio evidence.

Video Engineers/Examiners with background in image processing and video broadcasting will perform technical analysis of video evidence.

Additional responsibilities include providing courtroom presentations, providing expert testimony, and guiding technology research programs. A technical Bachelor's Degree required with advanced degree preferred. Salary is based on education and experience. Send resumes to:

Engineering Research Facility, Attn: Personnel, Quantico, VA 22135.

Candidates must be a US citizen and consent to a complete background investigation, polygraph, and drug test. The FBI is an Equal Opportunity Employer.

AccuStaff Incorporated, the fourth largest staffing agency in partnership with Discovery Television Center-Miami, is seeking the following dedicated professionals to join us...a new, state-of-art digital broadcast facility located in Miami, Florida.

TRANSMISSION ENGINEER

Minimum of 3 years engineering experience with satellite transmission provider, TV transmission facility, or network control/operations center. Knowledge of video, audio and RF signal parameters and quality control standards required, including maintenance of Satellite Uplink Systems. PC literacy required, experience with digital compression systems (Scientific Atlanta Power Vu and/or General Instrument Digicipher preferred). Knowledge of Phillips/BTS master control/routing and Louth Automation systems a plus. Spanish and/or Portuguese a plus. 24/7.

SYSTEMS ENGINEER

Successful candidates will have a primary expertise in either systems, RF, video or audio. Minimum 3 years systems experience including significant experience in ITU-R 601 digital environment. Ability to diagnose to component level, familiarity with test signals and equipment, analytical software, and computer programming. AA degree in electronics or computer systems required. Military or other significant experience/training can be substituted for degree requirements. SBE certification and FCC general class license strongly preferred. Spanish and/or Portuguese a plus.



Send resumes to: **Freddy Carbonell**
Discovery Television Center-Miami
6505 Blue Lagoon Drive, Suite 100
Miami, Florida 33126. Fax: 305-507-1560
E-mail: fernando_carbonell@discovery.com

Equal Opportunity Employer

CNN ENGINEERS

THE WORLD'S NEWS LEADER

Turner Broadcasting System has career opportunities for experienced television engineers. These career positions demand an extensive background in equipment maintenance, digital video and audio, and knowledge of computer systems and networks. Please mail or fax your resume and cover letter to:

Jim Brown
Assistant Vice President
of Engineering Services

Turner Broadcasting System, Inc.
One CNN Center • P.O. Box 105366
Atlanta, GA 30348-5366

Fax: 404-827-1835
Phone: 404-827-1638



TBS is an equal opportunity employer.

ASST. CHIEF ENGINEER KMSS Fox 33 is looking for a technician with 2-5 years experience in repairing and maintaining all aspects of a broadcast facility. Strong rf and computer experience required. SBE certification desired. Send resumes with salary history to Chief Engineer, KMSS-TV, 3519 Jewella Ave, Shreveport, LA 71109 or fax to 318-631-4195. EOE

WE PLACE ENGINEERS TV, POST, SATELLITE, VIDEO



KEYSTONE INT'L, INC.
Dime Bank Bldg., 49 S. Main St.
Pittston, PA 18640, USA

Phone (717) 655-7143
Fax/Resume (717) 654-5765

598

Broadcast ENGINEERING
THE JOURNAL OF DIGITAL TELEVISION

AdIndex

	Page Number	Reader Service Number	Advertiser Hotline		Page Number	Reader Service Number	Advertiser Hotline
Acrodyn Communications	43	32	800-523-2596	Jampro Antennas	70	41	916-383-1177
Adherent Ltd.	119	71	605-339-0100	JVC Professional Products	32-33	11	800-JC-5825
Ampex Systems	67	38	800-752-7590	Kino Flo Inc.	124	69	818-767-6528
Andrew Corp.	64	28	708-349-3300	KTech Telecommunications	133	65	818-361-2248
ASC Audio Video Corp.	148	3	818-843-7004	Leightronix Inc.	135	58	517-694-5589
Audio Precision	13	14	800-231-7350	Leitch Incorporated	23	15	800-231-9673
Autopac	101	48	509-235-2636	Louth Automation	39	31	415-843-3665
Avid Technology	63	27	800-949-2843	Matthey Electronics Ltd.	100	47	914-763-8893
Avitech Int'l.	133	63	425-885-3863	Microwave Radio Corp.	111	59	978-250-1110
BAF Communications Corp.	133	64	407-324-8250	Miranda Technologies Inc.	49	22	514-333-1772
BASFEMI LLC	27	26	888-295-5551	NDS Americas Inc.	29	18	949-725-2554
Beck Associates	141	102	512-388-9777	NVision Inc.	96-97	43	916-265-1000
B&H Photo Video	136-139	67, 68	800-947-9928	Odetics, Inc.	17	6	800-243-2001
Bi-tronics, Inc.	140	101	800-666-0996	Optex	132	57	
Canare	125	70	818-365-2446	Panasonic Broadcast	5		800-528-8601
Canon U.S.A. Broadcast Lens	11	13	800-321-4388	PC Video Conversion Corp.	131	55	408-779-1280
Comark Communications	71	44	413-569-5939	Philips Broadcast TV	7	12	800-962-4287
CommScope Inc.	44	33	800-982-1708	Pinnacle Systems Inc.	123	72	650-526-1600
Communications Specialties	68	39	516-273-0404	Play, Inc.	9		916-631-1865
Continental Electronics	122	54	214-381-7161	Prime Image Inc.	95	42	408-867-6519
CPV/Eima Div.	38	20	415-594-4000	Professional Communications Sys.	51	24	813-888-5353
Digital System Tech.	65	29	626-472-7701	Quantegy Inc.	45	34	770-486-2800
DNF Industries	110	51	818-252-0198	Quantel Ltd.	18-19	7	800-218-0051
Drake Automation Ltd.	53	17	760-631-8021	Scitex Digital Video	60-61	36	888-846-7017
EEV, Inc.	69	40	914-592-6050	SeaChange	99	46	978-897-0100
ESE	132	56	310-322-2136	Shure Brothers Inc.	113	52	800-258-HURE
Extron Electronics	103	50	714-491-1500	Snell & Wilcox Ltd.	35-37	19	408-260-1000
Faroudja Laboratories	15	5	408-735-1492	Snell & Wilcox Ltd.	55-58	35	408-260-1000
Global Microwave Systems	52	25	760-631-8021	Snell & Wilcox Ltd.	104-109	60-62	408-260-1000
Harris Corp./Broadcast Div.	3	4	606-282-4800	Storage Technologies Corp.	31	10	800-STORTEK
Henry Engineering	133	66	626-355-3656	Technical Operations	102	49	
Hewlett Packard	24-25	16	800-452-4844	Tekniche	93	45	888-TEKNICHE
Hewlett Packard	47	21	800-452-4844	Tektronix Inc.	40-41		800-998-3588
Hoodman Corp.	141	103	310-379-6391	Trompeter Electronics	62	37	818-707-2020
Intercom Electronics	21	8		Videotek, Inc.	143	2	800-800-5719
Intertec Publishing	66		800-288-8606	Ward Beck Systems	22	9	416-438-6550
Intrapelex Inc.	54	23	978-692-9000	Wheatstone Corporation	2	1	252-638-7000
ITS Corp.	121	53	724-941-1500	Windows to the Web	127		
				Winsted Corp.	66	30	800-559-6691

Sales Offices

WEST
Duane Heffner
5236 Clodny Ave., Suite 108
Agoura Hills, CA 91301
(818) 707-6476
Fax: (818) 707-2313
E-Mail address:
dheffner@worldnet.att.net

Susan Simon
3046-3 Lakemont Drive
San Ramon, CA 94583
(925) 735-7616
Fax: (925) 735-7626
E-Mail address:
ssimon@pacbell.net

Sue Horwitz
809 South Orange Drive
Los Angeles, CA 90036
(213) 913-9485
Fax: (213) 965-1059
E-Mail address:
76345.2624@compuserve.com

EAST
Josh Gordon
210 President Street, Suite #4
Brooklyn, NY 11231
(718) 802-0488
Fax: (718) 522-4751

EAST/MIDWEST
Joanne Melton
1775 Broadway, Suite 730
New York, NY 10019
(212) 641-5270
Fax: (212) 459-0395

INTERNATIONAL
Richard Woolley
Tony Chapman
P.O. Box 250
Banbury, Oxon OX16 8YJ U.K.
+44(0) 1295 278407
Fax: +44(0) 1295 278408
E-Mail address:
richardwoolley@compuserve.com

JAPAN
Orient Echo, Inc.
Masah Yoshikawa
1101 Grand Maison
Shimomiyabi-Cho 2-18
Shinjuku-ku, Tokyo 162, Japan
(3)+81 3235-5961
Fax: (3)+81 3235-5852

CLASSIFIED ADVERTISING
OVERLAND PARK, KS
Jeff Utter
P.O. Box 12901
Overland Park, KS 66282
(800) 896-9939 (913) 967-1732
Fax: (913) 967-1735

LIST RENTAL SERVICES
Lori Christie
9800 Metcalf
Overland Park, KS 66212-2215
(913) 967-1875
Fax: (913) 967-1897

Broadcast ENGINEERING

EDITORIAL

Brad Dick, Editor
Steve Epstein, Technical Editor
Deanna Rood, Senior Associate Editor
Jennifer Lowe, Group II Editorial Assistant
Tom Cook, Senior Managing Editor
Carl Bentz, Directories Manager

ART

Stephanie L. Kastelan, Senior Art Director

BUSINESS

PRIMEDIA Intertec
Raymond E. Maloney, President and CEO
Cameron Bishop, President
Dennis Triola, Group Publisher
Eric Proffitt, Marketing Coordinator
Kathy Lewis, Advertising Coordinator
Sandra Ferguson, Classified Adv. Coordinator
Doug Coonrod, Corporate Art Director
Barbara Kummer, Circulation Director
Leann Sandifar, Circulation Manager
Customer Service: 913-967-1711 or 800-441-0294

PRIMEDIA Specialty Magazines

James A. Warner, President

PRIMEDIA Inc.

William F. Reilly, Chairman and CEO
Charles McCurdy, President
Beverly C. Chell, Vice Chairman

TECHNICAL CONSULTANTS

Jerry Whitaker, Technical Program Consultant
Eric Neil Angevine, Broadcast Acoustics
John H. Battison, P.E., Antennas/Radiation
John Kean, Subcarrier Technology
Donald L. Markley, Transmission Facilities
Harry C. Martin, Legal
Larry Bloomfield, News Technical Editor

MEMBER ORGANIZATIONS

Sustaining Members of:

- Acoustical Society of America
- Society of Broadcast Engineers
- Society of Motion Picture and TV Engineers
- Society of Cable & Telecommunications Engineers

Member, American Business Press

Member, BPA International

Affiliate Member,

International Teleproduction Society



BROADCAST ENGINEERING is edited for corporate management, engineers/technicians and other management personnel at commercial and public TV stations, post-production and recording studios, broadcast networks, cable, telephone and satellite production centers and networks. Qualified persons include consulting engineers and dealer/distributors of broadcast equipment.

SUBSCRIPTIONS: Non-qualified persons may subscribe at the following rates: United States and Canada; one year, \$55.00. Qualified and non-qualified persons in all other countries; one year, \$70.00 (surface mail); \$130.00 (air mail). Subscription information: P.O. Box 12937, Overland Park, KS 66282-2937.

Authorization to photocopy items for internal or personal use, or the internal or personal use of specific clients, is granted by PRIMEDIA Intertec, provided that the base fee of U.S. \$2.25 per copy, plus U.S. \$0.00 per page is paid directly to Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923. The fee code for users of the Transactional Reporting Service is ISSN 0361-0942/1997 \$2.25+\$0.00. For those organizations that have been granted a photocopy license by CCC, a separate system of payment has been arranged. Prior to photocopying items for classroom use, contact CCC at (508) 750-8400. Organizations or individuals with large quantity photocopy or reprint requirements should contact Cherie Wood, (913) 967-7212. Microfilm copies of *Broadcast Engineering* magazine are available by calling or writing UMI, 300 North Zeeb Rd., P.O. Box 1346, Ann Arbor, MI 48106-1346. Phone: (313) 761-4700 or (800) 521-0600.

©1998 by PRIMEDIA Intertec **PRIMEDIA Intertec**
All rights reserved.

BROADCAST ENGINEERING (ISSN 0007-1994) is published monthly (except semi-monthly in May and December) and mailed free to qualified persons by Intertec Publishing, 9800 Metcalf, Overland Park, KS 66212-2215. Periodicals postage paid at Shawnee Mission, KS, and additional mailing offices. Canada Post International Publications Mail (Canadian Distribution) Sales Agreement No. 0956295. POSTMASTER: Send address changes to *Broadcast Engineering*, P.O. Box 12902, Overland Park, KS 66282-2902. CORRESPONDENCE: Editorial and Advertising: 9800 Metcalf, Overland Park, KS 66212-2215. Phone: 913-341-1300. Edit. fax: 913-967-1905. Advert. fax: 913-967-1904. © 1998 by Intertec Publishing. All rights reserved.

Setting new TV standards

BY PAUL MCGOLDRICK



As expected, the "Video and Broadcast Components" chapter of the *PC 99 System Design Guide* was published near the end of April, allowing for last-minute input from this year's NAB. The final version of the guide will define what PCs will look like and what they will do next year.

There are three different PC definitions: Consumer PC 99, Office PC 99 and Entertainment PC 99. The Consumer PC 99 is going to be an entry-level machine, while the Office PC 99 will be heavy on office applications. The latter one, the Entertainment PC 99, is what everyone will hope to sell — and it is also the one to watch.

You should not be surprised that the document clearly lays out a path to replace any existing ideas of what a TV receiver system is all about. If you were expecting to go out next year to buy that DTV receiver with the separate satellite receiver and the DVD player, have the tranquilizers ready. That's not how Wintel wants it to be. And when you get such large groups of PC manufacturers in agreement, it will happen. Think the PC industry is not ready for this step? Then let's straighten out a few curves here.

This Entertainment version of PC 99 requires the PC to have the following capabilities: playback of MPEG-2 video from DVD, playback of video from DTV broadcasts, analog video input and capture, analog TV tuner, bus mastering of MPEG sources, ability for the CPU to de-multiplex MPEG transport streams, DV decoding and encoding, de-interlacing of SDTV and MPEG-2 playback — without interference from background tasks. Items that are recommended include: digital satellite reception, digital cable reception and ATSC DTV support.

Is there anything inherently difficult about incorporating these features? No. Most are already down to a chip or two. Video capture can be a direct software

function or it can be in one chip from AverLogic. For another \$7, you can buy their de-interlacer as well. Satellite reception down to the decoding stages now only requires two ICs thanks to Broadcom and Philips. There are plenty of decoding ICs to choose from, and there are a number of superchips for interactive digital cable. MPEG-2 decoding is available in a number of single-chip solutions. But wait, now you don't need application-specific hardware at all. For several months, Intel has been quietly shipping a software application to decode MPEG-2 on a Pentium-II.

The document lays out a path to replace any existing ideas of what a TV receiver system is all about.

Although the system specification does not note any specific audio decoding, other than the ability to handle it, there are several Dolby-approved software applications for that. The carry-over PC 98 specs allow for other sources, as well as the mixing and monitoring of them. There is also a continuing pressure to facilitate VBI reception and instructions for 4X oversampling of the VBI data.

The preamble to the chapter (Chapter 15) is one of the best clues as to where Wintel sees the entertainment PC going. Issues include "Increased use of multiple screens and their associated display controllers. This would allow a PC in the den running a word processing application to simultaneously supply a TV in the family room with a DVD movie or TV content." Also, "Gradual separation of receiver functions from display functions. The two will be linked by software

running on the host processor. This allows different MPEG elementary streams, such as video, audio and data, to be sent to the appropriate subsystems within the PC. It also prepares the way for the longer range goal of a video home network."

It is interesting, but not surprising, that the specification does not address the essentially incompatible 1,080i, other than to mention "higher ATSC formats are allowed." This adds to the pressure being put on the declared 1,080i players to change their ways. That is going to be interesting to watch.

If you are in the business of consumer appliances and think that this joint venture between Microsoft and Intel is just a lower-quality entertainment system, think again. The specification goes to great lengths to explain the possible business models with "new revenue opportunities for participating manufacturers." It also stresses that the specifications "add features while introducing PCs to these traditional areas without taking away any TV features. In particular, this means that the PC must meet or exceed the video and audio quality of traditional consumer appliances."

There can be no doubt that this approach, hardly unexpected, will rock the consumer electronics industry, which will evolve as a giant add-on feature industry for Wintel — or it will end up in a continuing legal battle. If it goes the legal route, I personally think it will be a much longer and more expensive battle than the browser wars, and it will be complicated by a sense of patriotism for Wintel.

You can find Chapter 15 of the *0.7 Review Draft of the PC 99 System Design Guide* at Intel's web site: <http://developer.intel.com/design/desguide/index.htm>. It is more friendly than a Word download at Microsoft. ■

Paul McGoldrick is an industry consultant based on the West Coast.

Matrix Routers

by Videotek.



The difference is control!

The entire SDR family of digital and analog matrix routing switchers was designed from an operator's point of view.

The power is in the control, and control is yours to take... by name, by number, by "From" and "To", by input and output, and also by salvos. Identify sources, destinations, and salvos with alphanumeric characters that are easily configured from the front panel, or simply download the information from a PC.



With a wide range of sizes,

types, and levels, the compact and expandable SDR series meets your needs for today and in the future at a surprisingly affordable price.

Take control... contact Videotek for more information on the SDR series and single bus routing switcher family today. **With Videotek, you control the router...it doesn't control you.**

Premium Quality, Intelligent Design, Smart Price...That's Videotek.

VIDEOTEK™
A Zero Defects Company

Five Year Warranty
ISO-9001 Certified

243 Shoemaker Road, Pottstown, PA 19464 Toll Free: (800) 800-5719 (610) 327-2292 FAX: (610) 327-9295
Visit us on the Worldwide Web: www.videotek.com

Circle (2) on Free Info Card

www.americanradiohistory.com

Time is
running
out,
 you make your play,
 hit the air and
score.

Just another day
 in the news game.

Like any sport, news is a competitive game demanding speed and accuracy. Put Leitch on your team and beat the competition to air. Leitch's digital news solutions let you record, edit and play to air faster and easier than ever before.

News can become history quicker than the flash of a red card. You need to play smarter and faster than the competition to win. Leitch's ASC VR300™ news server lets you lead the news game by giving you direct, real-time access to shared Fibre Channel storage. Your squad of producers, editors and journalists will experience the ultimate in team-work, simultaneously recording multiple feeds, editing a story, then instantly playing it to air. You'll suddenly be shaping entire stories you once had to leave in the field, and you'll have them on air before the competition rewinds their tapes.



It's all possible with NEWSFlash™, the world's first Windows NT-based integrated editing system designed specifically for news.



NEWSFlash™, a powerful new editing tool.

Add BrowseCutter™ and you've given your players all the equipment they need—your news journalists will be able to build rundowns, edit scripts, search wires and browse digital video, right from their computer desktops.

Like a solid game plan, Leitch's integrated news system keeps your team in championship form. All you have to do is put the ball in the net. **ASC**

www.leitch.com/asc

For your **FREE** white paper
 "Integrated News Solutions"

CALL (888) 843-7004 (US)
or 1+ (818) 843-7004
 (Worldwide)

Circle (3) on Free Info Card



ENGINEERING THE BIG PICTURE™

International/Canada +1 (416) 445-9640, (800) 387-0233 • USA East (800) 231-9673, USA West (888) 843-7004 • Latin America +1 (305) 884-5484
 Europe +44 (0) 1256-880088 • Australia +61 (2) 9939-3355 • Japan +81 (3) 5423-3631 • Brazil +55 (11) 867-0218

www.americanradiohistory.com