





■ Features :

- True sine wave output (THD<3%)
- High surge power up to 400W
- High efficiency up to 88%
- Fanless design, cooling by free air convection
- Built-in remote ON-OFF control
- Front panel indicator for operation status
- Power ON-OFF switch
- Protections: Bat. low alarm / Bat. low shutdown / Over voltage / Over temp. / Output short / Input reverse polarity / Overload
- Application : Home appliance, power tools, office and portable equipment, vehicle and yacht ...etc.
- 3 years warranty



**SPECIFICATION**

MODEL	TS-200-112□	TS-200-124□	TS-200-148□	TS-200-212□	TS-200-224□	TS-200-248□	
OUTPUT	<b>RATED POWER</b> 200W						
	<b>MAXIMUM OUTPUT POWER</b> 230W for 180 sec. / 300W for 10 sec. / surge power 400W for 30 cycles(typ.)						
	<b>AC VOLTAGE</b> Factory setting set at 110VAC 100 / 110 / 115 / 120VAC selectable by setting button S.W			Factory setting set at 230VAC 200 / 220 / 230 / 240VAC selectable by setting button S.W			
	<b>FREQUENCY</b> 60±0.1Hz 50/60Hz selectable by setting button			50±0.1Hz 50/60Hz selectable by setting button			
	<b>WAVEFORM</b> True sine wave (THD<3%) at rated input voltage						
	<b>AC REGULATION (Typ.)</b> ±3.0% at rated input voltage						
<b>FRONT PANEL INDICATOR</b> Operation status ; Green : normal, Orange(flashing) : remote control OFF, Red : abnormal							
INPUT	<b>BAT. VOLTAGE</b>	12V	24V	48V	12V	24V	48V
	<b>VOLTAGE RANGE (Typ.)</b>	10.5 ~ 15VDC	21 ~ 30VDC	42 ~ 60VDC	10.5 ~ 15VDC	21 ~ 30VDC	42 ~ 60VDC
	<b>DC CURRENT (Typ.)</b>	20A	10A	5A	20A	10A	5A
	<b>NO LOAD CURRENT DRAW (Typ.)</b>	1.25A	0.63A	0.32A	1.25A	0.63A	0.62A
	<b>OFF MODE CURRENT DRAW</b>	≤ 1mA					
	<b>EFFICIENCY (Typ.)</b> Note.1	86%	87.5%	88%	86%	87.5%	88%
<b>BATTERY TYPES</b> Open & sealed Lead Acid							
BATTERY INPUT PROTECTION	<b>FUSE</b>	30A*2	30A*1	15A*1	30A*2	30A*1	15A*1
	<b>BAT. LOW ALARM</b>	11.3±4%	22.5±4%	45±4%	11.3±4%	22.5±4%	45±4%
	<b>BAT. LOW SHUTDOWN</b>	10.5±4%	21±4%	42±4%	10.5±4%	21±4%	42±4%
	<b>BAT. POLARITY</b>	By internal fuse open					
OUTPUT PROTECTION	<b>OVER TEMPERATURE</b>	85°C ± 5°C	80°C ± 5°C	80°C ± 5°C	85°C ± 5°C	80°C ± 5°C	80°C ± 5°C
	Protection type : Shut down o/p voltage, re-power on to recover; by internal RTH1 detect power transistor						
	<b>OUTPUT SHORT</b>	Protection type : Shut down o/p voltage, re-power on to recover					
	<b>OVER LOAD (Typ.)</b>	105 ~ 115% load for 180 sec., 115% ~ 150% load for 10 sec. Protection type : Shut down o/p voltage, re-power on to recover					
<b>GFCI PROTECTION</b>	Optional (Only type F)			None			
<b>FUNCTION</b>	<b>REMOTE CONTROL</b> Open : Normal work ; Short : Remote off						
ENVIRONMENT	<b>WORKING TEMP.</b>	-10 ~ +35°C @ 100% load ; +60°C @ 50% load			-10 ~ +40°C @ 100% load, +60°C @ 50% load		
	<b>WORKING HUMIDITY</b>	20% ~ 90% RH non-condensing					
	<b>STORAGE TEMP., HUMIDITY</b>	-30 ~ +70°C / -22 ~ +158°F, 10 ~ 95% RH					
	<b>VIBRATION</b>	10 ~ 500Hz, 3G 10min./1cycle, 60min. each along X, Y, Z axes					
SAFETY & EMC	<b>SAFETY STANDARDS</b>	Design refer to UL458		None			
	<b>LVD</b>	None			EN60950-1		
	<b>WITHSTAND VOLTAGE</b>	Bat. I/P - AC O/P:3.0KVAC AC O/P - FG:1.5KVAC					
	<b>ISOLATION RESISTANCE</b>	Bat. I/P-AC O/P, AC O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH					
	<b>EMI CONDUCTION&amp;RADIATION</b>	Compliance to FCC class A			Compliance to EN55022 class A, 72/ 245/ CEE, 95/ 54/ CE, E-Mark		
<b>EMS IMMUNITY</b>	None			Compliance to EN61000-4-2,3,8 ENV50204			
OTHERS	<b>DIMENSION</b>	205*158*59mm (L*W*H)					
	<b>PACKING</b>	1.63Kg; 6pcs/10.8Kg/1.44CUFT					
<b>NOTE</b>	1.Efficiency is tested by 200W, linear load at 12V/24V/48V input voltage. 2.All parameters not specified above are measured at rated load, 25°C of ambient temperature.						

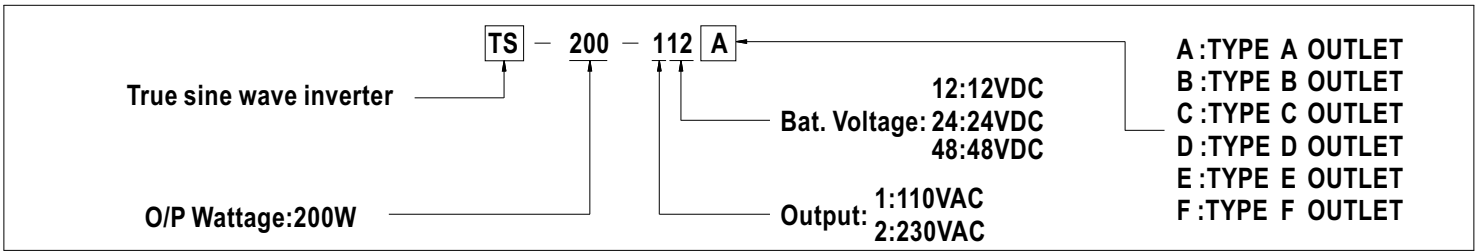

### AC Output Receptacles (optional)



Receptacle type						
	TYPE-A	TYPE-B	TYPE-C	TYPE-D	TYPE-E	TYPE-F
Country	USA	EUROPE	AUSTRALIA	U.K	JAPAN	GFCI
Certificate						

### Mechanical Specification

R.C Connector : JST B-XH or equivalent

Open	Normal work
Short	Remote off

Unit:mm

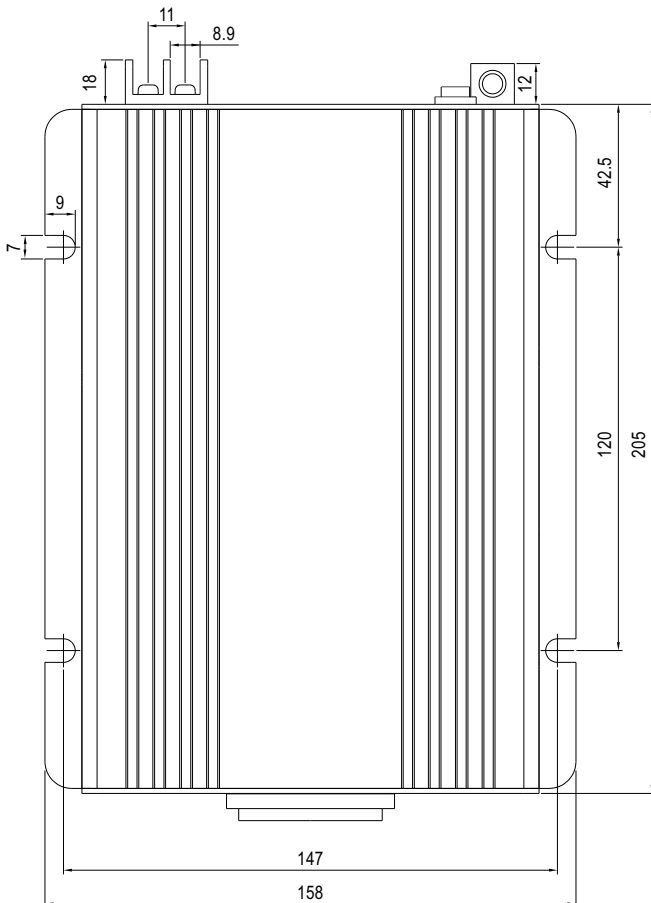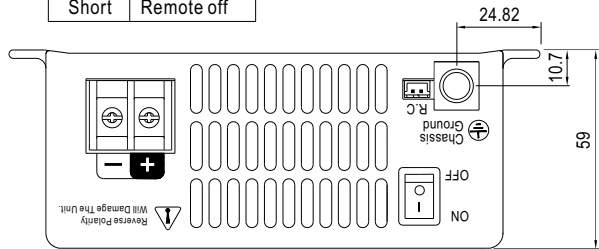

### Derating Curve

