



## Cal. 2317

High Hand series of Cal. 2315



2315



2317

### 1. Basic Specification

Calibre	2317
Ligne	11-1/2"
Total height	4.15mm
Hands	3
Date	○
Day of week	×
Battery life	3 Years

#### < Time Standard >

Type of quartz: Tuning fork type quartz crystal  
 Frequency : 32,768Hz  
 Accuracy : ±20 second / month worn under normal circumstances

#### < Battery >

Type of battery: Silver oxide SR626SW or equivalent

#### < Others >

Driving system: Two-pole stepping motor  
 Jewel : No jewels

#### < Additional Mechanisms >

Quick Date Change by turning crown  
 Second hand stopping at optional position  
 Powercell saving reset mechanism  
 Over-loading compensation device

#### < Balanceable weight of hand >

Minute hand Max. 0.4 μN.m  
 Second hand Max. 0.07 μN.m

### 2. Separated Parts

Calibre	2317
Setting stem	065-299

### 3. Remarks

#### < Setting stem >

Length of movement center to stem end : 20.0mm  
 Thread : Φ0.9mm x 12.38mm

#### < Measurement of time >

The unit time of measurement must be set at "10s" or integer fold value of 10s owing to the DFC system. And the measurement must be carried out in state of a complete watch.

#### < Marking on movement >

NO JEWELS  
 UNADJUSTED  
 (CAL NO.)  
 MIYOTA CO., JAPAN

< Typical clearance >

Mov't - Caseback : minimum 150µm or more


Hands - glass : 300 - 450µm\*

\* Depending and subject to the glass and case structure, and hand length.

< How to set time and date >

Date :  
1. Pull the crown out to the 1st Click Position.  
2. Turn the crown clockwise to set the date.  
\* If the date is set between the hours of around 9:00 PM and 1:00 AM,  
the date may not change on the following day.  
3. After the date has been set, push the crown back to the Normal position.

Time : Pull out the crown to the 2nd click position and turn the crown until the time is set correctly.

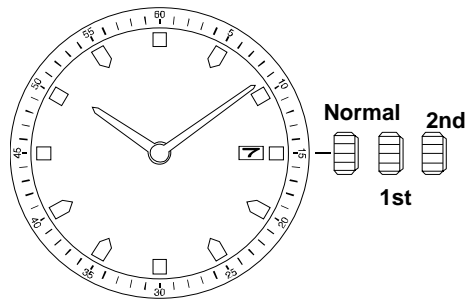

**These specifications might be changed without prior notice.**