

# MIYOTA

## Cal. JP15 / 25

### MULTIFUNCTION



### 1. Basic Specification

Calibre	JP15	JP25
Ligne	12 1/2"	
Overall diameter	Φ28.2 × 26.0 (3H-9H)	
Case fitting diameter	Φ27.6 × 26.0 (3H-9H)	
Total height	4.30mm	
Battery Life	Approx.2years	
Battery	SILVER OXIDE SR621SW or equivalent	

#### < Time Standard >

Type of quartz: Tuning fork type quartz crystal

Frequency : 32,768Hz

Accuracy : ±20 second / month worn under normal circumstances

#### < Balanceable weight of hand >

Minute hand Max. 0.4μN.m

Second hand Max. 0.09μN.m

Other small hands Max. 0.02μN.m

#### < Function >


Date calendar

Day/ 24Hours/ 24Hours Dual time display by means of hands

Powercell Saving Reset Mechanism(PSRM)

Over-loading Compensation Device(OLCD)

Digital Frequency Control(DFC) for time adjustment

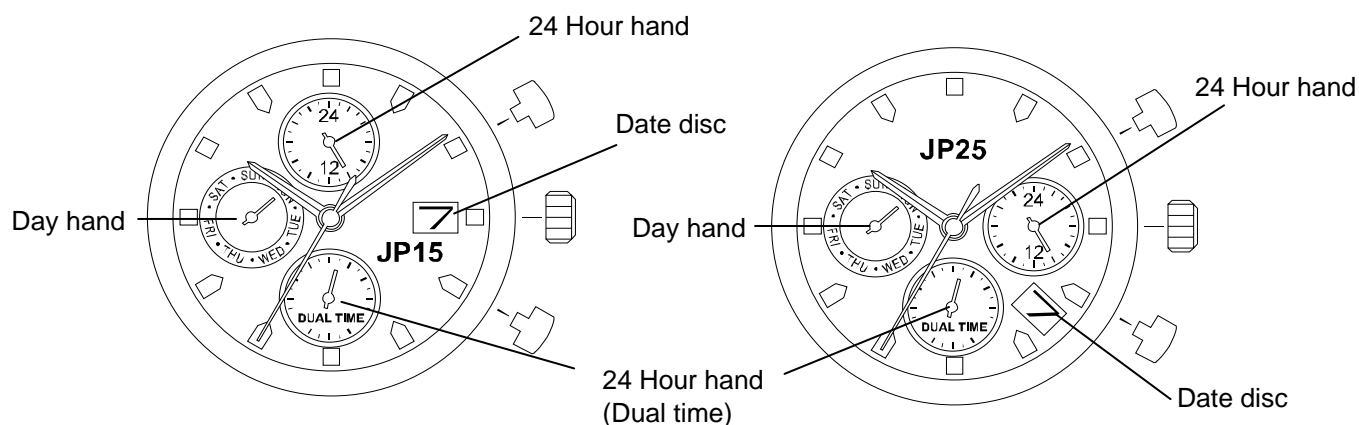

## 2. Separated Parts

Setting stem	065- 505    × 1
Length from movement center to far end of setting stem	20.03mm
Thread	Φ 0.9mm × 11.68mm

## 3. Others

### \* Measurement of time rate

The unit(gate) time of measurement must be set at "10 sec." or integer fold value of 10 sec. Owing to the DFC system, and the measurement must be performed in the form of complete watch.

### \* Marking on movement

JAPAN  
MIYOTA CO.  
( CAL. NO.)  
NO JEWELS

### \* Typical clearance


Mov't - Caseback                    minimum 150 microns

Top of hands - Glass                300 - 400 microns \*

\* subject to the glass, case structure, and the length of hand

## 4. Instruction Manual

### 【Displays and Buttons】

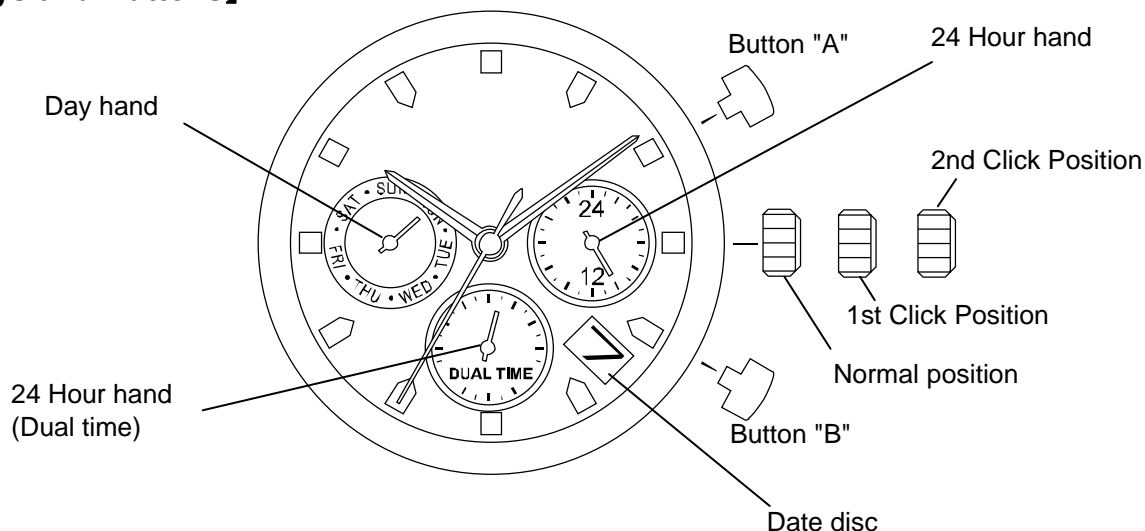

### A) SETTING THE DAY

1. Pull the crown out to the 2nd Click Position.
2. Turn the crown clockwise to set the day.
3. After the day has been set, push the crown back to the Normal position.

\* The day is changed during the period from 0AM to 5AM.

## **B) SETTING THE DATE**

1. Pull the crown out to the 1st Click Position.
2. Turn the crown clockwise to set the date.
  - \* If the date is set between the hours of around 9:00 PM and 1:00 AM, the date may not change on the following day.
3. After the date has been set, push the crown back to the Normal position.

## **C) SETTING THE TIME**

1. Pull the crown out to the 2nd Click Position.
2. Turn the crown clockwise to set hour and minute hands.
3. After the time has been set, push the crown back to the Normal position.

## **D) SETTING THE DUAL TIME**

Press button "A" to set the dual time hand forward in units of 15 minutes.

Press button "B" to set the dual time hand back in units of 15 minutes.

\*The dual time hand can be put rapidly by continuously pressing button "A" or "B".

*These specifications might be changed without prior notice.*

**CITIZEN WATCH CO., LTD.**

Coordinates		
記号	X	Y
GM	0	0
DH11	9359	-9359
DH12	-12271	4958

**miyota**  
ZEN WATCH CO., LTD. TOKYO, JAPAN

F


E

D

C

B

A

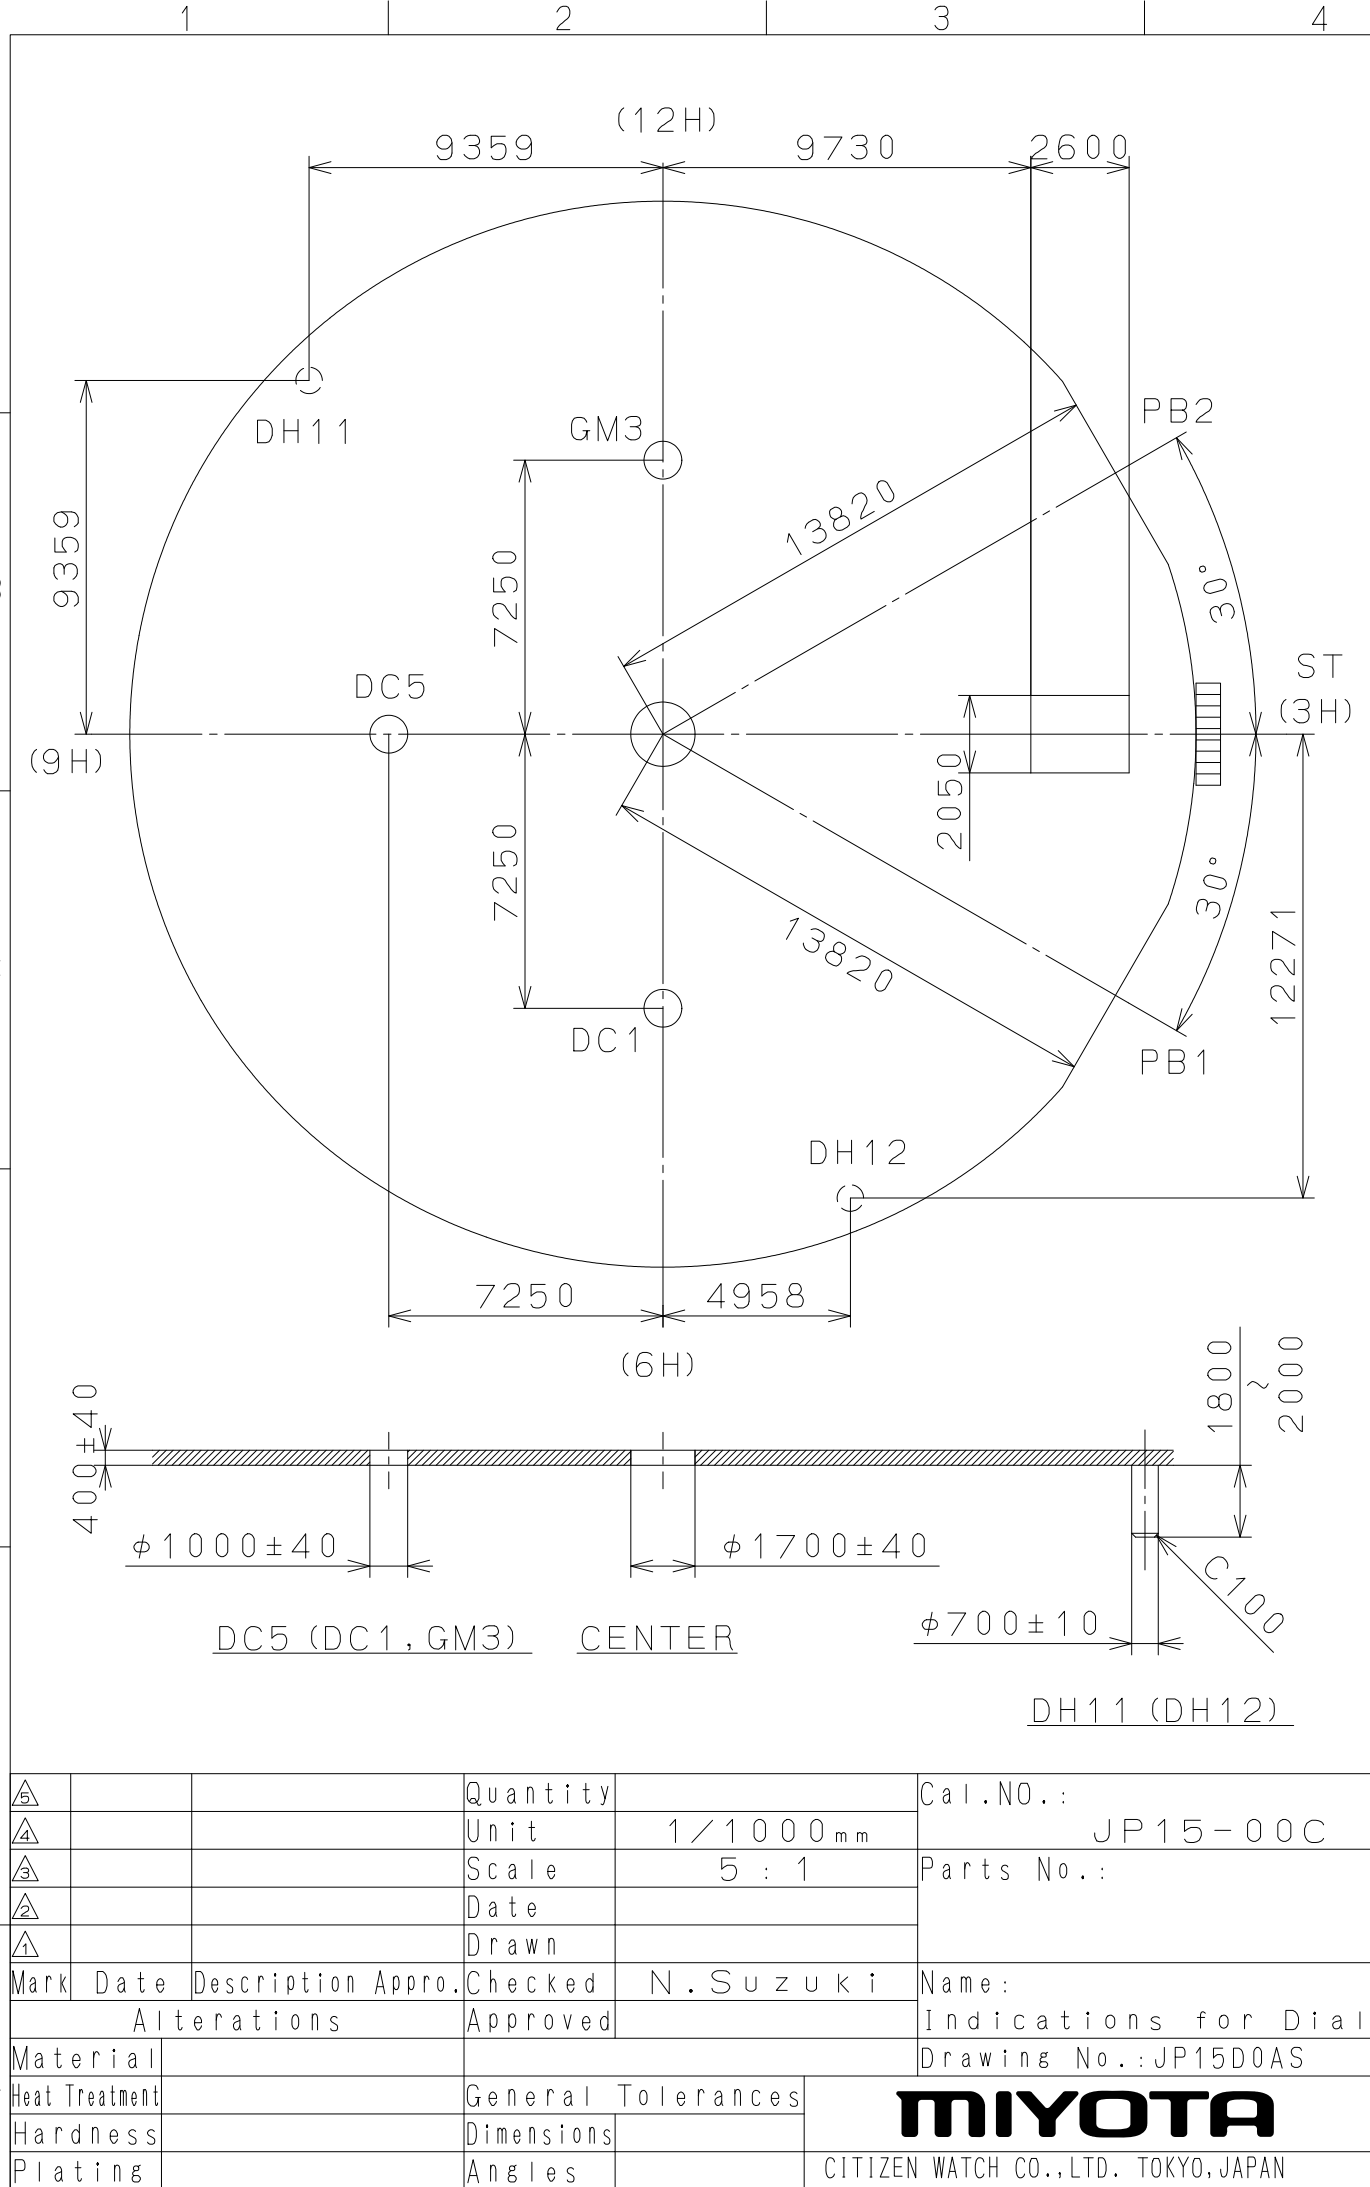


⑤			Quantity		Cal.NO.:
④			Unit	1/1000 <sub>mm</sub>	JP15-00C
③			Scale	5 : 1	Parts No.:
②			Date		
①			Drawn		
Mark	Date	Description	Appr.	Checked N. Suzuki	Name:
Alterations			Approved		Indications for Dial
Material					Drawing No.: JP15D0AS
Heat Treatment			General Tolerances		<b>MIYOTA</b> CITIZEN WATCH CO., LTD. TOKYO, JAPAN
Hardness			Dimensions		
Plating			Angles		

[illegible]

**miyota**  
EN WATCH CO., LTD. TOKYO, JAPAN

This drawing is provisional and subject to our reconfirmation and/or revision without notice.

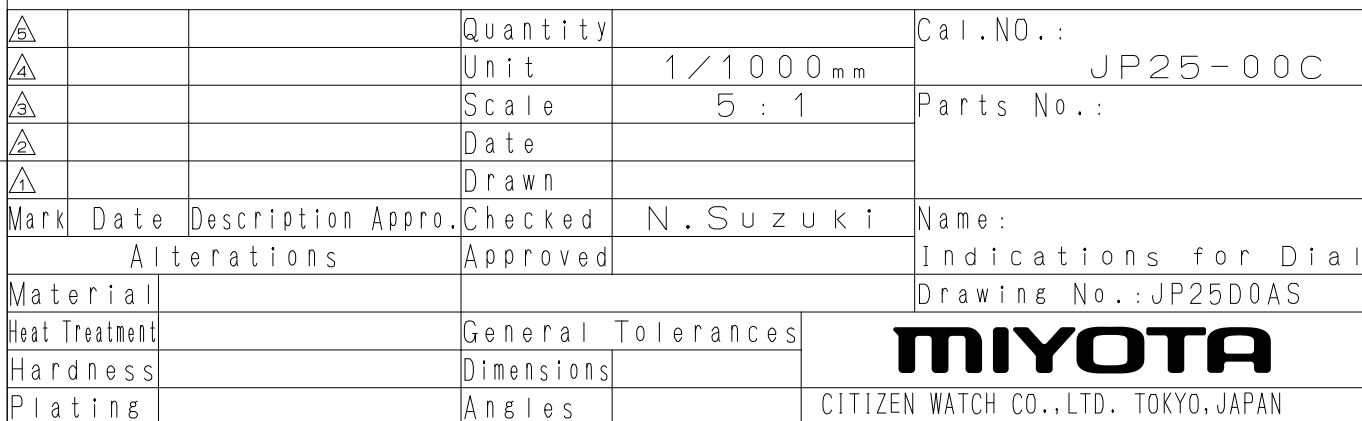

2006/12/25 (07:50:10)

This drawing is provisional and subject to our reconfirmation and/or revision without notice.

A

B

C

D

E

F

S0.9、P=0.225mm

φ500

□380

Section A-A

φ800

11680

1620

18015

A

A

⑤			Quantity		Cal.NO.:
④			Unit	1 / 1000 mm	
③			Scale	20 / 1	Parts No.:
②			Date		065-505
①			Drawn		
Mark	Date	Description	Appr.	Checked	Name:
		Alterations		Approved	SETTING STEM
Material					Drawing No.: 5050S000
Heat Treatment			General Tolerances		<b>MIYOTA</b>
Hardness			Dimensions		
Plating			Angles		
					CITIZEN WATCH CO., LTD. TOKYO, JAPAN