


Application Note APNT-0013 Local Access Receiver

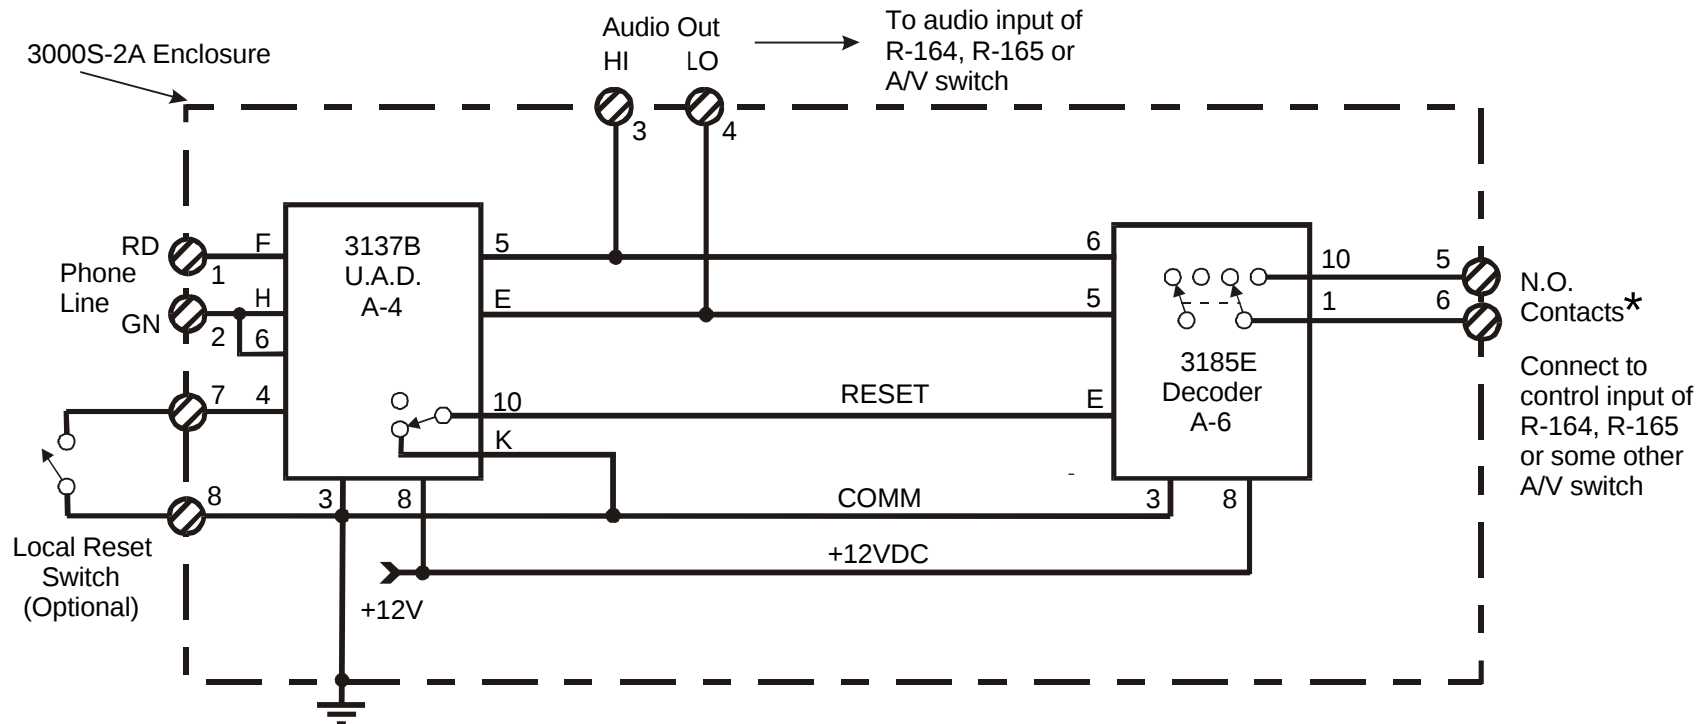

NOTES:

Rack mount enclosure shown allows for addition of more cards. Model 900/22F enclosure may also be used.
For fully wired unit serving 4 to 12 channels see 3000R-173.
Terminals are at TB-1
Audio Out couples phone line audio to R-164/R-165
N.O. Contacts drive R-164/R-165

OPERATION:

For remote operation, UAD connects to phone line after prescribed number of rings
Operator enters correct code to access A/V switch
System disconnects from phone line per selection (time, loop interrupt or both)
or optional use of Model 90417 Dial Tone Detector.