

PRODUCT SELECTION GUIDE

Analog, Digital & Mixed-Signal ICs, Modules,
Subsystems & Instrumentation, DC - 110 GHz



Automotive

Telematics & Sensors

Broadband

Cable Modem, CATV, DBS & VoIP
WiMAX, WiBro, WLAN & UWB

Cellular Infrastructure

GSM, GPRS, CDMA, TD-SCDMA,
WCDMA, UMTS & 4G /LTE

Fiber Optics & Networking

OC-48 to 100G

Microwave & mmWave Communications

Backhaul Radio Links
Multi-Pt Radios & VSAT

Military


C³I, ECM & EW

Space

Payload Electronics

Test & Measurement

Commercial & Industrial Sensors
Test Equipment

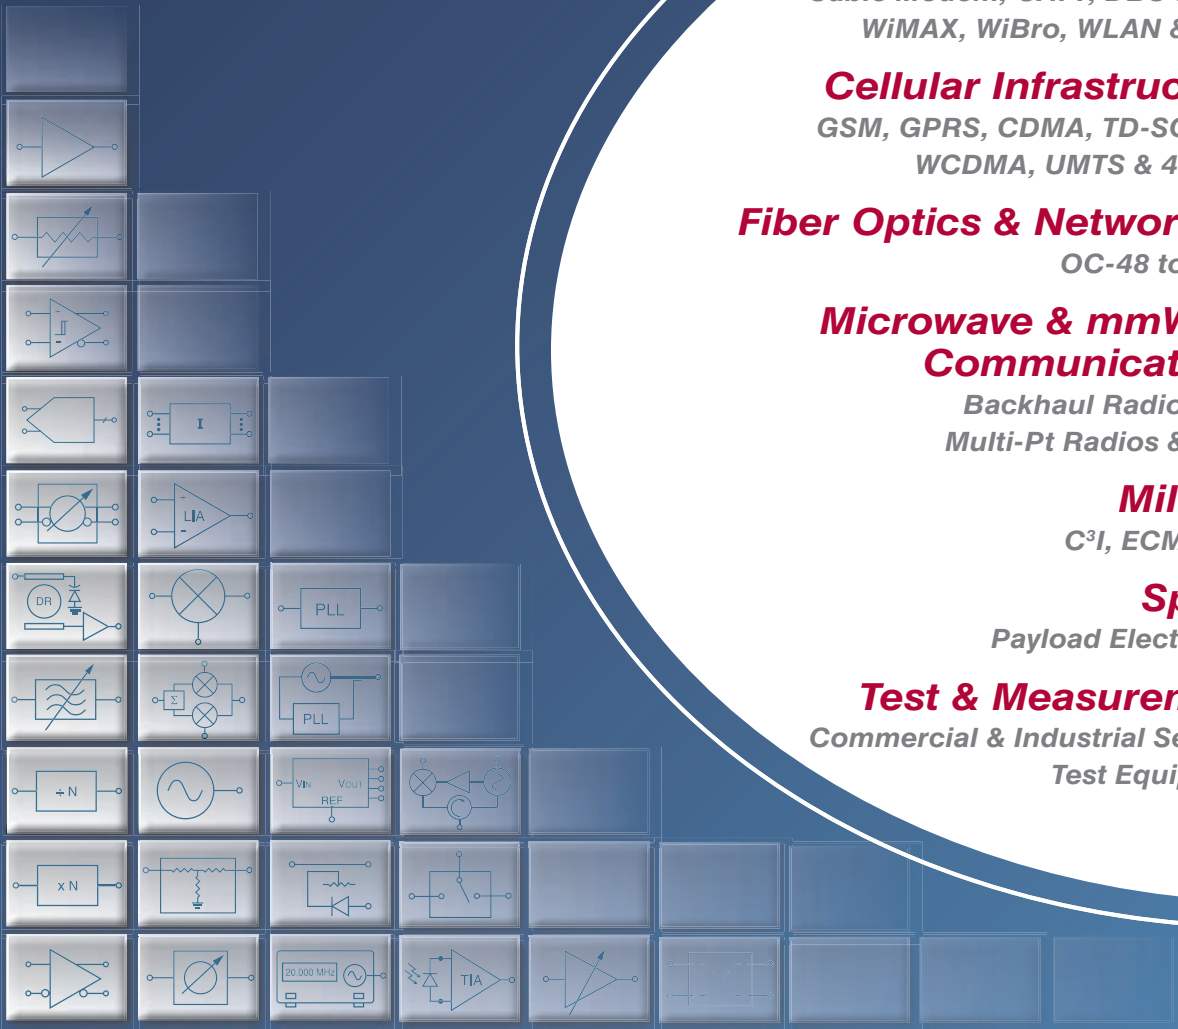

Hittite Microwave Corporation is pleased to introduce our May 2012 Product Selection Guide summarizing over 1025 products including 21 new products. This selection guide organizes Hittite's portfolio by product line. Full specifications for each product are available at www.hittite.com. Click on "My Subscription" to receive the latest product releases.

General Information Page

Customer Support	3
Sales Contact Information	56

New Products.....4

New & Expanded Product Lines

Millimeterwave Transmitter & Receiver ICs	5
Programmable Harmonic Filter	5
GaAs pHMET MMIC 2W Power Amplifier	6
High IP3 Dual Channel Downconverter	6
40 / 100G Optical Modulator Driver	26
Octal 10-Bit Analog-to-Digital Converter	26
Clock Divider & Delay Management IC	34
Clock Generator w/ Integer-N PLL	34

RF & Microwave ICs

Amplifiers	7
Attenuators	11
Automatic Gain Control	12
DC Power Conditioning	12
Filters - Tunable	12
IF / Baseband Processing	13
I/Q Mixers / IRMs	13
I/Q Downconverter / Receivers	13
I/Q Uconverter / Transmitters	14
Mixers	14
Modulators/Demodulators	16
Passives	16
Phase Shifters	17
Power Detectors	17
SDLVAs	18
Switches	18
Tranceivers	19
Variable Gain Amplifiers	19

Analog & Mixed-Signal ICs

Broadband Time Delays	27
Comparators	27
Crosspoint Switch	27
Data Converters	27
DC Power Conditioning	28
DC Power Management	28
High Speed Digital Logic	28
IF / Baseband Processing	30
Interface	30
Limiting Amplifiers	30
Mux & Demux	30
Optical Modulator Drivers	30
Transimpedance Amplifiers	30

Clocks & Timing ICs Page

Clock Distribution	35
Clock Generators	35
PLL with Integrated VCOs	35

LO Frequency Generation ICs

DC Power Conditioning	39
Filters - Tunable	39
Frequency Dividers & Detectors	39
Frequency Multipliers	39
Phase Locked Loop	40
PLL with Integrated VCOs	41
VCOs	41
PLOs	42

Connectorized Modules

Amplifiers	44
Attenuators	44
Dielectric Resonator Oscillators (DROs)	44
Frequency Dividers & Detectors	45
Frequency Multipliers	45
High Speed Digital Logic	45
I/Q Mixers	45
Mixers	45
Phase Shifters	45
SDLVAs	45
Switches	46
Synthesizer Module, MicroSynth®	46
VCOs	46

Instrumentation

Signal Generators	48
-------------------------	----

Market & Application Solutions

Automotive	20
Broadband	21
Cellular Infrastructure	23
Microwave & mmWave Communications, Test & Measurement & Sensors	24
Fiber Optics & Networking	31
Clock Generators for DC Clocking	36
Clocks & Timing	37
LO Generation Applications	43

Military & Space Screening..... 50

Designer's Kits..... 51

Package Information..... 52

Part Number Index..... 53

How to Buy:

Hittite Microwave Corporation offers many convenient ways to order products and/or receive pricing and delivery information. Our order entry/MRP system assures customer sample requests and orders will be entered quickly, tracked easily, and completed accurately on-time.

Direct Sales

• HMC Field Sales Offices:

You may contact our corporate or field sales offices listed on the back cover for assistance in purchasing Hittite products.

• Purchase On-line: www.hittite.com

With Hittite Microwave's E-Commerce capability customers can enjoy the convenience of on-line ordering via a secure shopping cart interface. Products can be purchased using either a MasterCard, Visa, American Express or JCB card. Orders are confirmed within one business day with delivery information. Orders ship within 2 business days of confirmation, based on availability.

• Purchase Orders via HMC Corporate Sales:

You may contact Hittite Microwave directly at (978) 250-3343. Purchase orders can be faxed to (978) 250-3373 or sent via email to sales@hittite.com. There is a minimum purchase order value of \$500.00 (U.S. Dollars).

Worldwide Network of Sales Representatives

You may purchase our products through our network of manufacturer representatives listed on the back cover.

• **European customers may also purchase products in Euros (€) directly from Hittite Microwave Deutschland GmbH (germany@hittite.com).**

• **Japanese customers may also purchase products in Yen (¥) directly from Hittite KK - Japan (japan@hittite.com).**

OUR QUALITY POLICY:

Hittite Microwave Corporation is Committed to:

- Being a supplier of products of the highest quality.
- Advancing state-of-the-art technology to support our products.
- Enhancing our competitive position with superior products.

Hittite's Quality Policy Recognizes

Responsibilities for Every Individual to:

- Take the initiative to promote quality.
- Create an environment where the highest quality standards are maintained.
- Participate in continuous improvement practices.

QUALITY & PRODUCT SUPPORT:

The Quality & Product Support Section of Our Web Site Includes:

- Quality Assurance -
Product manufacturing, qualification & screening flows
- Product Reliability
- Qualification Test Reports

Product Application Support

- Application Engineering Support
- Application Notes
- Mixer Spur Chart Calculator, Parametric Search & PLL Phase Noise Calculator
- Product Cross Reference
- Package & Layout Drawings -
Product outline, PCB land pattern and tape & reel drawings
- Published Papers
- S-Parameter Files

Data Sheets

- Complete product data sheets can be found on our web site.

HMC is ISO 9001:2000, AS9100 and ANSI/ESD S20.20-2007 certified. Every component is backed by every Hittite employee and subcontractor's commitment to total quality, thus providing our customers with products that meet or exceed all requirements, are delivered on-time and function reliably throughout their useful life.

WHAT WE DO

Hittite Microwave Corporation is an innovative designer and manufacturer of high performance integrated circuits (ICs), modules, subsystems and instrumentation for technically demanding digital, RF, microwave and millimeterwave applications covering DC to 110 GHz. The Company's standard and custom products apply analog, digital and mixed-signal semiconductor technologies, which are used in a wide variety of wireless / wired communication and sensor applications for Automotive, Broadband, Cellular Infrastructure, Fiber Optics & Networking, Microwave & Millimeterwave Communications, Military, Test & Measurement and Space markets. We offer over 1025 products across 35 product lines.

RF & Microwave ICs

Amplifiers
Attenuators
Automatic Gain Control
DC Power Conditioning
Filters - Tunable
IF / Baseband Processing
I/Q Mixers/IRMs
I/Q Downconverter/Receivers
I/Q Upconverters/Transmitters
Mixers
Modulators/Demodulators
Passives
Phase Shifters
Power Detectors
SDLVAs
Switches
Transceivers
Variable Gain Amplifiers

Analog & Mixed-Signal ICs

Broadband Time Delays
Comparators
Crosspoint Switches
Data Converters
DC Power Conditioning
DC Power Management
High Speed Digital Logic
IF/ Baseband Processing
Interface
Limiting Amplifiers
Mux & Demux
Optical Modulator Drivers
Transimpedance Amplifiers

Clocks & Timing ICs

Clock Distribution
Clock Generators
PLL with Integrated VCOs

LO Freq. Generation ICs

DC Power Conditioning
Filters - Tunable
Freq. Dividers & Detectors
Freq. Multipliers
Phase Locked Loop
PLL with Integrated VCOs
VCOs
PLOs

Connectorized Modules

Amplifiers
Attenuators
DROs
Freq. Dividers & Detectors
Freq. Multipliers
High Speed Digital Logic
I/Q Mixers
Mixers
Phase Shifters
SDLVAs
Switches
Synthesizer Module,
MicroSynth®
VCOs

Instrumentation

Signal Generators

We design and supply custom analog and digital ICs, modules, subsystems and instrumentation, combining multiple functions for specific requirements. We select the most appropriate semiconductor and package technologies, uniquely balancing digital and analog integration techniques.

Our custom and standard products support a wide range of wireless / wired communications & radar applications for the following markets:



Automotive
Telematics & Sensors



Broadband
CATV, DBS, WiBro, WiMAX,
WLAN, Fixed Wireless & UW



Cellular Infrastructure
GSM, GPRS, CDMA, WCDMA,
UMTS, TD-SCDMA & 4G/LTE



Fiber Optic & Networking
OC-48 to 100G



Microwave & mmWave Communications
Backhaul Radio Links
Multi-Pt Radios & VSAT



Military
C³, ECM & EW



Space
Payload Electronics



Test & Measurement
Commercial / Industrial
Sensors & Test Equipment

AMPLIFIERS - Linear & Power

Frequency (GHz)	Function	Gain (dB)	OIP3 (dBm)	NF (dB)	P1dB (dBm)	Bias Supply	Package	ECCN Code	Part Number
9 - 13.3	2W Power Amplifier	34	42	5.5	33	+6V @ 1400 mA	Chip	3A001.b.2.b	HMC952
9 - 14	2W Power Amplifier	33	43	-	34	+6V @ 1400 mA	LP5G	3A001.b.2.b	HMC952LP5GE
33.5 - 46.5	0.5W Medium Power Amplifier	21	35	-	24.5	+6V @ 500 mA	Chip	3A001.b.2.d	HMC1014
27.5 - 33.5	1W Power Amplifier	24	40	-	29	+6V @ 600 mA	Chip	3A001.b.2.d	HMC1024
29 - 37	2W Power Amplifier	22	42	6	32	+6V @ 1200 mA	Chip	3A001.b.2.d	HMC1029
24 - 43.5	Low Noise Amplifier	23	22	2.3	12	+2.5V @ 70 mA	LP3C	3A001.b.2.d	HMC1040LP3CE

CLOCKS & TIMING

Clock Distribution

Max. Clock Rate (GHz)	Function	Input	Output	Phase Jitter (12 k to 20 MHz)	Rise/Fall Time (ps)	Channel Skew (ps)	Disable Mode	Power Supply (V)	Package	ECCN Code	Part Number
4	Clock Divider & Delay Management	LVPECL, LVDS, CML, CMOS	LVPECL	13 fs RMS	90	300 to 1500	Yes	5 or 3.3	LP3	3A001.a.11.b	HMC988LP3E

Clock Generators

Max. Frequency (MHz)	Function	Typical Phase Jitter (fsRMS)	Phase Noise Floor (dBc/Hz)	Maximum Reference Freq. (MHz)	Typical Power Consumption (W)	Figure of Merit (Frac/Int) (dBc/Hz)	Package	ECCN Code	Part Number
500	Integer Mode PLL (x1, x5, x10)	Defined by VCXO	Defined by VCXO	140	0.0064	-208	MS8	EAR99	HMC1031MS8E

DATA CONVERTERS

Low Power Analog-to-Digital Converters

Sample Rate	Function / Mode	Resolution (bits)	# of Channels	Power Dissipation	SNR (dBFS)	SFDR (dBc)	Package	ECCN Code	Part Number
20/40/50/65 MSPS	Octal Channel	10	8	12/20/25/30 mW / Channel	61.6	81	LP9E	EAR99	HMCAD1104

Ultra High Speed Analog-to-Digital Converters

Input Frequency (GHz)	Function	Sample Rate (Gsp/s)	Resolution (Bits)	ENOB	SFDR (dBFS)	Package	ECCN Code	Part Number
20	3-Bit ADC with 1:2 Demux	26	3	2.9	26	LP9	3A001.a.11.b	HMCAD5831LP9BE

Track-and-Hold Amplifiers

Input Frequency (GHz)	Function	Single Tone THD/SFDR (dB)	Maximum Clock Rate (GS/s)	Output Noise (mV RMS)	Hold Mode Feed-through Rejection (dB)	Package	ECCN Code	Part Number
DC - 18	Track-and-Hold	-65 / 67	4.0	1.65	> 60	LC4B	3A001.a.11.b	HMC661LC4B
DC - 5	Track-and-Hold	-65 / 67	4.0	0.86	> 60	LC4B	3A001.a.11.b	HMC760LC4B

DC POWER MANAGEMENT - Active Bias Controller

Supply Range (V)	Function	VDRAIN Range (V)	IDRAIN Bias Current (mA)	IGATE Drive Current (mA)	VGATE Range (V)	Over/Under IDRAIN Current Alarm	Package	ECCN Code	Part Number
5 - 16.5	Active Bias Controller	5 - 16.5	50 - 1600	-4 to 4	-2.46 to +2.04	Yes	Chip	EAR99	HMC980

FILTERS - Tunable

Programmable Harmonic

Frequency Range (GHz)	Function	Return Loss (dB)	3 dB Bandwidth (GHz)	Stopband Frequency (Rej. >10 dB)	Tuning Response (ns)	Package	ECCN Code	Part Number
0.25 - 3.025	Programmable Harmonic Low Pass	10	1 - 3	1.2 Fcutoff	10	LP3	EAR99	HMC1044LP3E

Band Pass

Frequency Range (GHz)	Function	Return Loss (dB)	3 dB Bandwidth (%)	Low Side Rejection Frequency (Rej. >20 dB)	High Side Rejection Frequency (Rej. >20 dB)	Tuning Response (ns)	Package	ECCN Code	Part Number
9 - 19	Band Pass	9.5	18	0.81 x Fcenter	1.17 x Fcenter	200	Chip	EAR99	HMC897

I/Q Mixers / IRMs

RF Frequency (GHz)	Function	IF Frequency (GHz)	Conversion Gain (dB)	LO / RF Isolation (dB)	IIP3 (dBm)	Package	ECCN Code	Part Number
15 - 33.5	I/Q Mixer / IRM	DC - 3.5	-10	40	22	LC4	EAR99	HMC1042LC4

MIXERS - Downconverter RF ICs & +13 to +14 dB LO Double & Triple Balanced

RF Frequency (GHz)	Function	IF Frequency (GHz)	Conversion Gain (dB)	LO / RF Isolation (dB)	IIP3 (dBm)	Package	ECCN Code	Part Number
0.7 - 3.5	High IP3 Dual Downconverter	0.05 - 0.35	7	55	+25	LP4	EAR99	HMC990LP4E
2 - 18	Double Balance Mixer	DC - 2	-10	35	19	LC3B	EAR99	HMC91048LC3B

OPTICAL MODULATOR DRIVERS

Data Rate Max. (Gbps)	Function	Gain (dB)	Group Delay Variation (ps)	Additive Jitter (ps)	Output Voltage Max. (Vp-p)	Package	ECCN Code	Part Number
32	8Vpp Optical Modulator Driver, SMT Package	32	±7	0.25	8	BGA	EAR99	HMC5850BG


TRANSCEIVERS - New Product Line!

Frequency (GHz)	Function	P1dB (dBm) NF (dB)	Max Gain (dB)	Gain Adjust (dB)	Phase Noise @ 1 MHz Offset (dBc/Hz)	Power Dissipation (W)	Package	ECCN Code	Part Number
57 - 64	60 GHz Integrated Transmitter	12 dBm	38	17	-86	0.8	Chip	5A991.b	HMC6000
57 - 64	60 GHz Integrated Receiver	6 dB	67	65	-86	0.61	Chip	5A991.b	HMC6001

New & Expanded Product Lines


HMC6000 & HMC6001 Millimeterwave Transmitter & Receiver ICs, 57 - 64 GHz

NEW!

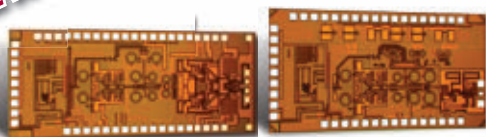

Supports WiGig & IEEE 802.11ad Multi-Gbps Solutions!

Rx Noise Figure & Tx P1dB vs. Frequency (Maximum Gain)

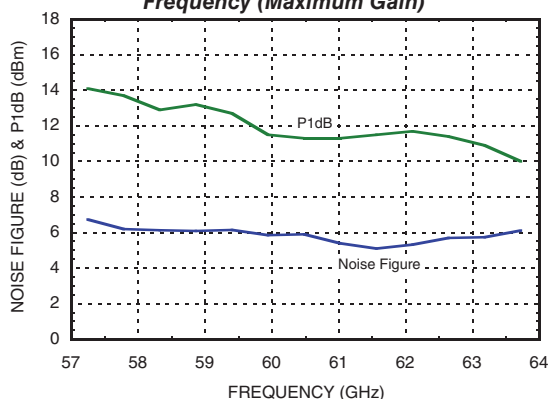


Highly Integrated IC Radio Solutions for Low-Cost 60 GHz Applications!

Features

- ◆ Covers 57 - 64 GHz Frequency Band
- ◆ Complete Baseband to RF Solutions
- ◆ Integrated Frequency Synthesizer
- ◆ Universal Analog I/Q Baseband Interface
- ◆ Up to 1.8 GHz RF Bandwidth

INDOOR Gbps LINKS

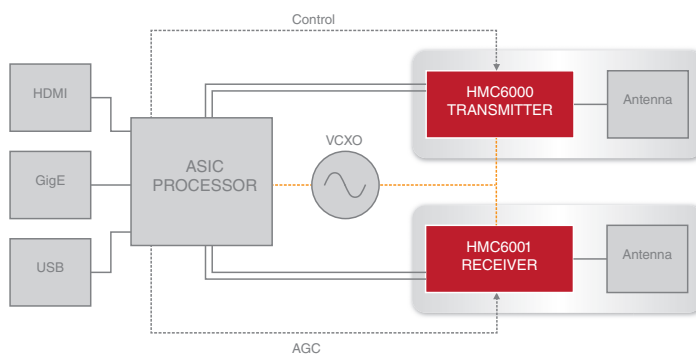


HMC1044LP3E Industry's First Programmable Harmonic Filter Ideally Suited for Multi-Standard, Multi-Carrier Applications

NEW!




HMC1044LP3E for Programmable Harmonic LPF Gain vs. Frequency

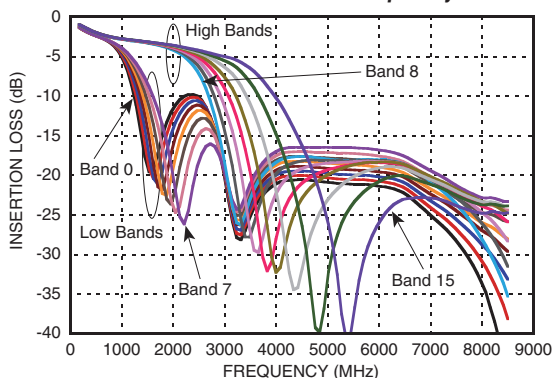

Features

- ◆ Programmable Bandwidth to Track Wideband Sources to 3 GHz
- ◆ 20 dB Typical LO Harmonic Rejection Improves Modulator/Demodulator Sideband/Image Rejection
- ◆ Integrated Filter, No Calibration Required
- ◆ Footprint up to 90% Smaller than Fixed Passive LO Filters

Example of Modulator Sideband Rejection With and Without HMC1044LP3E

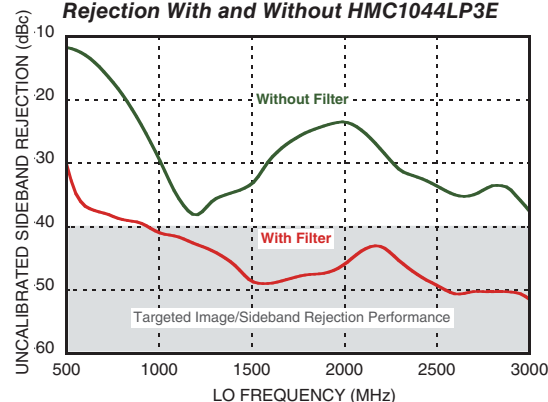

Reduced Harmonic Content Dramatically Reduces Sideband Rejection When Driving Wideband Quadrature Mixers!

HMC952LP5GE GaAs pHEMT MMIC 2W Power Amplifier with Power Detector, SMT, 9 - 14 GHz

NEW!


**Features On Chip
Power Detector!**




Features

- ◆ High P1dB Output Power: +34 dBm
- ◆ High Psat Output Power: +35 dBm
- ◆ High Gain: 33 dB
- ◆ High Output IP3: +43 dBm
- ◆ Supply Voltage: Vdd = +6V @ 1400 mA

P1dB vs Temperature

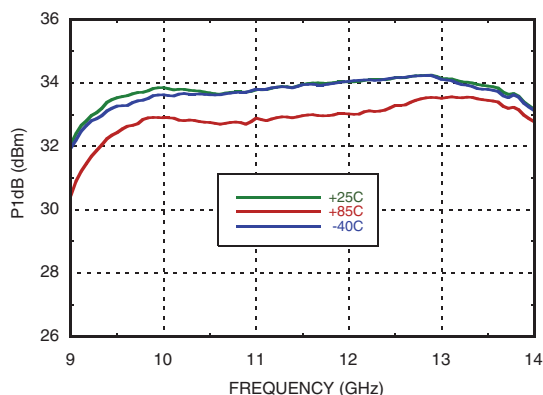

Detector Voltage vs. Frequency & Temperature

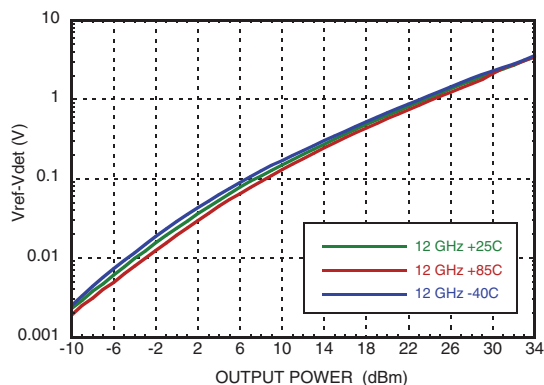

Ideal for High Linearity Microwave Radio, Military SATCOM Applications!

HMC990LP4E Broadband High IP3 Dual Channel Downconverter, 0.7 - 3.5 GHz

NEW!




Features


- ◆ 0.7 - 3.5 GHz Broadband Operation with No External Matching
- ◆ High Input IP3: +25 dBm
- ◆ SSB Noise Figure: 9 dB
- ◆ Power Conversion Gain: 7 dB

Compact Solution, 4 x 4 mm² QFN Package!

Input IP3 vs. High Side LO & Low Side LO @ VGATE = 4.8V

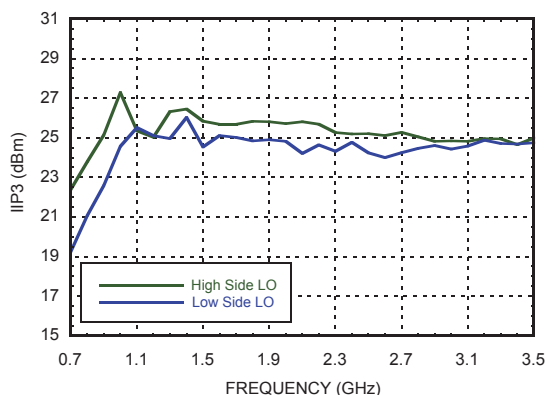

Conversion Gain vs. LO Drive @ VGATE = 4.8V

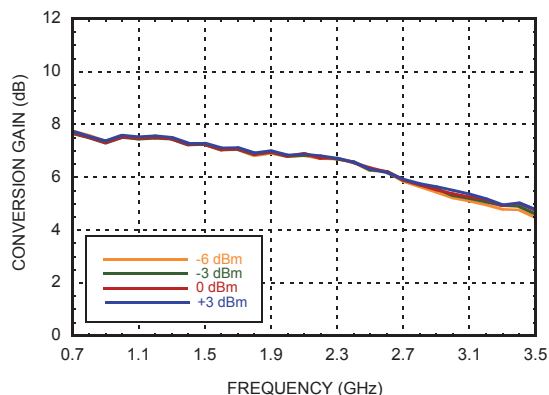

Ideal for Multi-Standard Cellular Base Station and Wideband Radio Link Receivers!

SMT & Chip (Die) Products

AMPLIFIERS

Frequency (GHz)	Function	Gain (dB)	OIP3 (dBm)	NF (dB)	P1dB (dBm)	Bias Supply	Package	ECCN Code	Part Number
Low Noise Amplifiers									
0.175 - 0.66	Low Noise	24	37	0.5	19	+5V @ 90 mA	LP3	EAR99	HMC616LP3E
0.23 - 0.66	Low Noise, Dual Channel	22	37	0.5	19	+5V @ 97 mA	LP4	EAR99	HMC816LP4E
0.3 - 3.0	Low Noise, High IP3	15	37	1.5	22	+5V @ 90 mA	SOT26	EAR99	HMC374E
0.55 - 1.2	Low Noise	16	37	0.5	21	+5V @ 88 mA	LP5	EAR99	HMC617LP3E
0.55 - 1.2	Low Noise, Dual Channel	16	37	0.5	20.5	+5V @ 95 mA	LP4	EAR99	HMC817LP4E
0.6 - 1.4	Low Noise	32	40	0.9	21.5	+5V @ 254 mA	LP4	EAR99	HMC718LP4E
0.7 - 1.2	Low Noise with Failsafe Bypass	16	33	0.9	13	+5V @ 57 mA	LP3	EAR99	HMC668LP3E
0.7 - 2.2	Low Noise	22	36	1.7	24	+5V @ 227 mA	LP3	EAR99	HMC758LP3E
1 - 11	Low Noise	17	30	1.5	18	+5V @ 55 mA	LP4	EAR99	HMC753LP4E [1]
1 - 12	Low Noise	17	28	1.5	19	+5V @ 55 mA	Chip	EAR99	HMC-ALH444 [1]
1.2 - 3.0	Low Noise	26	21	1.3	11.5	+5V @ 21 mA	LP3	EAR99	HMC548LP3E
1.3 - 2.9	Low Noise	34	39	1	21.5	+5V @ 272 mA	LP4	EAR99	HMC719LP4E
1.7 - 2.2	Low Noise	19	36	0.75	20	+5V @ 117 mA	LP3	EAR99	HMC618LP3E
1.7 - 2.2	Low Noise with Failsafe Bypass	17	29	1.4	12	+5V @ 86 mA	LP3	EAR99	HMC669LP3E
1.7 - 2.2	Low Noise, Dual Channel	20.5	35	0.85	21	+5V @ 112 mA	LP4	EAR99	HMC818LP4E
2 - 4	Low Noise	10	36	2.6	21	+6V @ 100 mA	Chip	EAR99	HMC594 [1]
2 - 4	Low Noise	10	36	3	21	+6V @ 100 mA	LC3B	EAR99	HMC594LC3B [1]
2 - 4	Low Noise	20.5	36	3	21	+6V @ 170 mA	Chip	EAR99	HMC609 [1]
2 - 4	Low Noise	20	36.5	3.5	21.5	+6V @ 170 mA	LC4	EAR99	HMC609LC4 [1]
2 - 12	Low Noise	15	25	1.8	13	+4V @ 45 mA	LC4	EAR99	HMC772LC4 [1]
2.1 - 2.9	Low Noise	19	33	0.9	19	+5V @ 95 mA	LP3	EAR99	HMC715LP3E
2.3 - 2.5	Low Noise	19	12	1.7	6	+3V @ 8.5 mA	SOT26	EAR99	HMC286E
2.3 - 2.7	Low Noise	19	29.5	0.75	16.5	+5V @ 59 mA	LP2	EAR99	HMC667LP2E
2.3 - 2.7	Low Noise with Bypass	20	31	1.1	17	+5V @ 74 mA	LP3	EAR99	HMC605LP3E
2.4 - 2.5	Transceiver, Front End	13	10	3	5	+3V @ 24 mA	MS8G	EAR99	HMC310MS8GE
3.1 - 3.9	Low Noise	18	33	1	19	+5V @ 65 mA	LP3	EAR99	HMC716LP3E
3.3 - 3.8	Low Noise with Bypass	19	29	1.2	16	+5V @ 40 mA	LP3	EAR99	HMC593LP3E
3.4 - 3.8	Low Noise with Bypass	16	18	2	7	+3V @ 9 mA	LP3	EAR99	HMC491LP3E
3.5 - 7.0	Low Noise	15.5	28	2.4	16	+5V @ 50 mA	Chip	EAR99	HMC392
3.5 - 7.0	Low Noise	16	30	2.5	16	+5V @ 55 mA	LC4	EAR99	HMC392LC4
3.5 - 7.0	Low Noise	15	28	3	16	+5V @ 65 mA	LH5	EAR99	HMC392LH5
4.8 - 6.0	Low Noise with Bypass	15	26	1.5	14	+5V @ 42 mA	LP3	EAR99	HMC604LP3E
4.8 - 6.0	Low Noise	16.5	31.5	1.1	18.5	+5V @ 73 mA	LP3	EAR99	HMC717LP3E
5 - 6	Low Noise	9	13	2.5	2	+3V @ 6 mA	MS8G	EAR99	HMC318MS8GE
5 - 6	Low Noise	12	10	2.5	9	+3V @ 25 mA	MS8G	EAR99	HMC320MS8GE
5 - 10	Low Noise	20	28	1.7	16	+3.5V @ 80 mA	Chip	EAR99	HMC902
5 - 10	Low Noise	19	28	1.8	16	+3.5V @ 80 mA	LP3	EAR99	HMC902LP3E
5 - 20	Low Noise	13	26	2.2	16	+5V @ 30 mA	Chip	EAR99	HMC-ALH435 [1]
6 - 17	Low Noise	18	25	1.7	14	+3.5V @ 80 mA	LP3	EAR99	HMC903LP3E
6 - 18	Low Noise	19	26	1.6	15	+3.5V @ 80 mA	Chip	EAR99	HMC903
6 - 20	Low Noise	22	20	2.3	10	+3V @ 53 mA	Chip	EAR99	HMC565
6 - 20	Low Noise	21	20	2.5	10	+3V @ 53 mA	LC5	EAR99	HMC565LC5
6 - 26.5	Low Noise	22	18	2.5	10	+3.5V @ 45 mA	LC4	EAR99	HMC963LC4
7 - 13.5	Low Noise	17	24	1.8	12	+3V @ 51 mA	Chip	EAR99	HMC564
7 - 14	Low Noise	17	25	1.8	13	+3V @ 51 mA	LC4	EAR99	HMC564LC4
7 - 17	Low Noise	21	20	1.8	15	+3V @ 65 mA	Chip	EAR99	HMC516
7.5 - 26.5	Low Noise	13	23	2.5	13	+3.5V @ 70 mA	LC4	EAR99	HMC962LC4
9 - 18	Low Noise	20	25	2	14	+3V @ 65 mA	LC5	EAR99	HMC516LC5
12 - 16	Medium Power LNA	23	34	2.5	25	+5V @ 200 mA	LP5	EAR99	HMC490LP5E [1]
12 - 17	Medium Power LNA	27	35	2	26	+5V @ 200 mA	Chip	EAR99	HMC490 [1]
13 - 25	Low Noise	21	13	3.5	5	+3V @ 41 mA	Chip	EAR99	HMC342
13 - 25	Low Noise	22	20	3.5	9	+3V @ 43 mA	LC4	EAR99	HMC342LC4
14 - 27	Low Noise	19.5	-	2.2	17	+4V @ 90 mA	LC4B	5A991.h	HMC504LC4B
14 - 27	Low Noise	18	-	2.5	14	+4V @ 90 mA	Chip	5A991.h	HMC-ALH216 [1]
14 - 27	Low Noise	20	-	2	14	+4V @ 90 mA	Chip	5A991.h	HMC-ALH476 [1]
17 - 26	Low Noise	19	23	2.2	11	+3V @ 65 mA	Chip	EAR99	HMC517
17 - 26	Low Noise	19	23	2.5	13	+3V @ 67 mA	LC4	EAR99	HMC517LC4
17 - 27	Low Noise	25	25	2.2	13	+4V @ 73 mA	LC4	EAR99	HMC751LC4
18 - 31	Low Noise	15	23	3.5	11	+3V @ 75 mA	LC4	EAR99	HMC519LC4
18 - 32	Low Noise	15	23	2.8	12	+3V @ 65 mA	Chip	3A001.b.2.d	HMC519
18 - 40	Low Noise	10	-	3.9	12	+5V @ 45 mA	Chip	3A001.b.2.d	HMC-ALH445

[1] Amplifiers that benefit from Hittite Active Bias Controllers

AMPLIFIERS

Frequency (GHz)	Function	Gain (dB)	OIP3 (dBm)	NF (dB)	P1dB (dBm)	Bias Supply	Package	ECCN Code	Part Number
20 - 32	Low Noise	15	23	3	12	+3V @ 65 mA	Chip	3A001.b.2.d	HMC518
21 - 29	Low Noise	13	19	2.5	8	+3V @ 35 mA	LC3B	EAR99	HMC341LC3B
22 - 26.5	Low Noise	25	-	3	12	+2.5V @ 52 mA	Chip	5A991.h	HMC-ALH311 [1]
24 - 28	Low Noise	25	26	2.5	13	+3V @ 70 mA	LC4	EAR99	HMC752LC4 [1]
24 - 30	Low Noise	13	16	2.5	6	+3V @ 30 mA	Chip	EAR99	HMC341
24 - 32	Low Noise	21	-	2	7	+5V @ 68 mA	Chip	3A001.b.2.d	HMC-ALH364
24 - 36	Low Noise	23	17	2	8	+3V @ 58 mA	Chip	3A001.b.2.d	HMC263
24 - 36	Low Noise	20	18	2.2	8	+3V @ 58 mA	LP4	3A001.b.2.d	HMC263LP4E
24 - 40	Low Noise	12	-	3.5	13	+4V @ 45 mA	Chip	3A001.b.2.d	HMC-ALH244
24 - 40	Low Noise	22	-	2	11	+5V @ 66 mA	Chip	3A001.b.2.d	HMC-ALH369
24 - 40	Low Noise	11.5	-	4	15	+4V @ 60 mA	Chip	3A001.b.2.d	HMC-ALH140 [1]
24 - 43.5	Low Noise	23	22	2.3	12	+2.5V @ 70 mA	LP3C	3A001.b.2.d	HMC1040LP3CE
27 - 33	Low Noise	20	-	3	12	+2.5V @ 52 mA	Chip	3A001.b.2.d	HMC-ALH313 [1]
28 - 36	Low Noise	21	24	2.8	12	+3V @ 82 mA	LP4	3A001.b.2.d	HMC566LP4E
29 - 36	Low Noise	20	23.5	2.8	12	+3V @ 80 mA	Chip	3A001.b.2.d	HMC566
35 - 45	Low Noise	16	-	2	6	+4V @ 87 mA	Chip	3A001.b.2.d	HMC-ALH376
37 - 42	Low Noise	22	-	3.5	12	+2.5V @ 52 mA	Chip	3A001.b.2.d	HMC-ALH310 [1]
57 - 65	Low Noise	21	-	4	12	+2.5V @ 64 mA	Chip	3A001.b.2.f	HMC-ALH382 [1]
71 - 86	Low Noise	13	-	5	7	+2.4V @ 30 mA	Chip	3A001.b.2.f	HMC-ALH508
71 - 86	Low Noise	14	-	5	7	+2V @ 50 mA	Chip	3A001.b.2.f	HMC-ALH509

Broadband Gain Blocks (Listed by P1dB Output Power)

DC - 6	SiGe Gain Block	15.5	22	3	8	+5V @ 25 mA	MP86	EAR99	HMC474MP86E
DC - 6	SiGe Gain Block	15	20	3	8	+3V @ 25 mA	SC70	EAR99	HMC474SC70E
DC - 6	SiGe Gain Block	20	25	2.5	12	+5V @ 35 mA	MP86	EAR99	HMC476MP86E
DC - 6	SiGe Gain Block	19	24	2.5	12	+5V @ 35 mA	SC70	EAR99	HMC476SC70E
DC - 10	HBT Gain Block	15	24	4.5	13	+5V @ 56 mA	Chip	EAR99	HMC397
DC - 10	HBT Gain Block	15	25	4	13	+5V @ 50 mA	Chip	EAR99	HMC405
DC - 6	HBT Gain Block	17	27	6.5	14	+5V @ 50 mA	SOT26	EAR99	HMC313E
DC - 8	HBT Gain Block	12	30	6	14	+5V @ 56 mA	Chip	EAR99	HMC396
DC - 4	HBT Gain Block	15	28	4.5	15	+5V @ 54 mA	Chip	EAR99	HMC395
DC - 8	HBT Gain Block	15	30	5	15	+5V @ 54 mA	SC70	EAR99	HMC311SC70E
DC - 6	HBT Gain Block	14.5	32	4.5	15.5	+5V @ 56 mA	LP3	EAR99	HMC311LP3E
DC - 6	HBT Gain Block	16	31.5	4.5	15.5	+5V @ 54 mA	ST89	EAR99	HMC311ST89E
DC - 4	SiGe Gain Block	24	31	2.5	17	+5V @ 62 mA	SC70	EAR99	HMC478SC70E
DC - 4	SiGe Gain Block	22	32	2	18	+5V @ 62 mA	MP86	EAR99	HMC478MP86E
DC - 4	SiGe Gain Block	22	33	3	18	+5V @ 62 mA	ST89	EAR99	HMC478ST89E
DC - 5	SiGe Gain Block	15	34	4	18	+8V @ 72 mA	MP86	EAR99	HMC479MP86E
DC - 5	SiGe Gain Block	15	34	4	18	+8V @ 75 mA	ST89	EAR99	HMC479ST89E
DC - 5	Dual SiGe Gain Block	15	34	4	18	+8V @ 75 mA	MS8G	EAR99	HMC469MS8GE
DC - 5	SiGe Gain Block	20	33	3.5	19	+8V @ 79 mA	ST89	EAR99	HMC481ST89E
DC - 10	pHEMT Gain Block	14	30	7	20	+5V @ 76 mA	LP2	EAR99	HMC788LP2E
DC - 5	SiGe Gain Block	19	34	2.9	20	+8V @ 82 mA	ST89	EAR99	HMC480ST89E
DC - 5	SiGe Gain Block	20	33	3.5	20	+8V @ 74 mA	MP86	EAR99	HMC481MP86E
DC - 5	Dual SiGe Gain Block	20	34	3.2	20	+8V @ 80 mA	MS8G	EAR99	HMC471MS8GE
DC - 4	HBT Gain Block	21	33	4	21	+5V @ 82 mA	ST89	EAR99	HMC589ST89E
0.2 - 4.0	Low Noise, High IP3, pHEMT Gain Block	13	38	2.3	22	+5V @ 110 mA	ST89	EAR99	HMC639ST89E
0.2 - 4.0	Low Noise, High IP3, pHEMT Gain Block	13	40	2.2	22	+5V @ 155 mA	ST89	EAR99	HMC636ST89E
DC - 1	HBT Gain Block	22	37	2.8	22	+5V @ 88 mA	ST89	EAR99	HMC580ST89E
DC - 4.5	HBT Gain Block	21	35	3.5	22	+8V @ 110 mA	ST89	EAR99	HMC475ST89E
DC - 5	SiGe Gain Block	19	36	4	22	+8V @ 110 mA	ST89	EAR99	HMC482ST89E

CATV Amplifiers

0.04 - 0.96	Low Noise, Dual Output	5	27	3.5	12	+5V @ 120 mA	MS8G	EAR99	HMC549MS8GE
0.05 - 1.0	Low Noise, 75 Ohm	14	39	2.2	19	+5V @ 120 mA	ST89	EAR99	HMC599ST89E
0.04 - 1.0	50 / 75 Ohm Differential Gain Block	16	40	2.5	23.5	+5V @ 270 mA	LP4B	EAR99	HMC770LP4BE
0.05 - 3.0	HBT Gain Block	15	40	3.5	18	+5V @ 88 mA	ST89	EAR99	HMC740ST89E
0.05 - 3.0	HBT Gain Block	20	42	2.5	18.5	+5V @ 96 mA	ST89	EAR99	HMC741ST89E
DC - 1	HBT Gain Block, 75 Ohm	14	38	5.5	21	+5V @ 160 mA	S8G	EAR99	HMC754S8GE

Driver Amplifiers

0.7 - 2.8	HBT Driver Amplifier	18	42	3.8	25	+5V @ 125 mA	ST89	EAR99	HMC789ST89E
0.8 - 3.8	Driver Amplifier	18	30	7.5	17	+5V @ 53 mA	SOT26	EAR99	HMC308E
3.0 - 4.5	HBT Driver Amplifier	21	36	5	23.5	+5V @ 130 mA	MS8G	EAR99	HMC326MS8GE
17.5 - 41	Driver Amplifier	21	27	-	20	+5V @ 295 mA	Chip	3A001.b.2.d	HMC-AUH256

[1] Amplifiers that benefit from Hittite Active Bias Controllers

SMT & Chip (Die) Products

AMPLIFIERS

Frequency (GHz)	Function	Gain (dB)	OIP3 (dBm)	NF (dB)	P1dB (dBm)	Bias Supply	Package	ECCN Code	Part Number
Linear & Power Amplifiers									
0.4 - 2.5	High IP3 Amp, 1/2 Watt	12.5	42	6	27	+5V @ 150 mA	ST89	EAR99	HMC454ST89E
1.6 - 2.2	Medium Power Amplifier	22	40	5.5	27	+3.6V @ 270 mA	QS16G	EAR99	HMC413QS16GE
5 - 6	Medium Power Amplifier	17	38	6	26	+5V @ 300 mA	MS8G	EAR99	HMC406MS8GE
5 - 7	Medium Power Amplifier	15	40	5.5	25	+5V @ 230 mA	MS8G	EAR99	HMC407MS8GE
5 - 18	Medium Power Amplifier	18	28	7	19.5	+5V @ 120 mA	LP3	EAR99	HMC451LP3E
5 - 20	Medium Power Amplifier	22	30	6.5	20	+5V @ 127 mA	Chip	EAR99	HMC451
5 - 20	Medium Power Amplifier	19	30	7	19	+5V @ 114 mA	LC3	EAR99	HMC451LC3
6 - 18	Medium Power Amplifier	15.5	32	4.5	20	+5V @ 95 mA	Chip	EAR99	HMC441
6 - 18	Medium Power Amplifier	17	32	4.5	20	+5V @ 95 mA	LC3B	EAR99	HMC441LC3B
6.5 - 13.5	Medium Power Amplifier	14	29	4.5	18	+5V @ 95 mA	LP3	EAR99	HMC441LP3E
7 - 15.5	Medium Power Amplifier	15	32	4.8	20	+5V @ 95 mA	LH5 Hermetic	EAR99	HMC441LH5
7 - 15.5	Medium Power Amplifier	16	30	4.5	19	+5V @ 90 mA	LM1	EAR99	HMC441LM1
9.5 - 11.5	Medium Power Amplifier	29.5	33	6	27	+5V @ 310 mA	LC4	EAR99	HMC608LC4
12 - 30	Medium Power Amplifier	16	25	7	16	+5V @ 101 mA	Chip	EAR99	HMC383
12 - 30	Medium Power Amplifier	15	25	7.5	16.5	+5V @ 100 mA	LC4	EAR99	HMC383LC4
16 - 33	Medium Power Amplifier	17	33	-	24	+5V @ 400 mA	Chip	5A991.h	HMC-APH596
17 - 24	Medium Power Amplifier	24	34	4	25	+5V @ 250 mA	Chip	EAR99	HMC498
17 - 24	Medium Power Amplifier	22	36	4	25	+5V @ 250 mA	LC4	EAR99	HMC498LC4
17 - 30	Medium Power Amplifier	20	31	-	22	+4.5V @ 400 mA	Chip	5A991.h	HMC-APH196
17.5 - 24	Medium Power Amplifier	14	28	6.5	21.5	+5V @ 85 mA	LM1	EAR99	HMC442LM1
17.5 - 25.5	Medium Power Amplifier	15	28	5.5	22	+5V @ 85 mA	Chip	EAR99	HMC442 [1]
17.5 - 25.5	Medium Power Amplifier	13	27	8	22	+5V @ 84 mA	LC3B	EAR99	HMC442LC3B [1]
21 - 32	Medium Power Amplifier	16	33	5	24	+5V @ 200 mA	Chip	3A001.b.2.d	HMC499 [1]
21 - 32	Medium Power Amplifier	17	34	5	23	+5V @ 200 mA	LC4	3A001.b.2.d	HMC499LC4 [1]
NEW! 33.5 - 46.5	Medium Power Amplifier, 0.5 Watt	21	35	-	24.5	+6V @ 500 mA	Chip	3A001.b.2.d	HMC1014
34 - 42	Medium Power Amplifier	18.5	29	6.5	18	+5V @ 120 mA	Chip	3A001.b.2.d	HMC-ABH264 [1]
34 - 46.5	Medium Power Amplifier	22	34	-	24	+6V @ 250 mA	Chip	3A001.b.2.f	HMC1016
37 - 40	Medium Power Amplifier	20	35	-	26	+5V @ 640 mA	Chip	3A001.b.2.d	HMC-APH510
37 - 45	Medium Power Amplifier	21	32	-	23	+5V @ 475 mA	Chip	3A001.b.2.d	HMC-APH403
50 - 66	Medium Power Amplifier	24	25	-	17	+5V @ 220 mA	Chip	3A001.b.2.f	HMC-ABH241
55 - 65	Medium Power Amplifier	13	25	-	16	+5V @ 80 mA	Chip	3A001.b.2.f	HMC-ABH209 [1]
71 - 76	Medium Power Amplifier	24	-	-	17.5	+4V @ 130 mA	Chip	3A001.b.2.f	HMC-AUH318 [1]
71 - 76	Medium Power Amplifier	13	-	-	20	+4V @ 240 mA	Chip	3A001.b.2.f	HMC-APH633
71 - 86	Medium Power Amplifier	15	-	-	15	+4V @ 130 mA	Chip	3A001.b.2.f	HMC-AUH320 [1]
81 - 86	Medium Power Amplifier	22	-	-	17.5	+4V @ 160 mA	Chip	3A001.b.2.f	HMC-AUH317 [1]
81 - 86	Medium Power Amplifier	12	-	-	19	+4V @ 240 mA	Chip	3A001.b.2.f	HMC-APH634
0.01 - 10	GaN Power Amplifier, 10 Watt	11	47	-	38	+48V @ 1100 mA	Chip	3A001.b.2.b	HMC999
0.1 - 22	Power Amplifier, 2 Watt	12	41	5	31	+15V @ 500 mA	Chip	3A001.b.2.c	HMC998
0.4 - 2.2	Power Amplifier, 1 Watt	21	49	6.5	30	+5V @ 510 mA	ST89	EAR99	HMC452ST89E
0.4 - 2.2	Power Amplifier, 1.6 Watt	20.5	49	6.5	32	+5V @ 725 mA	ST89	EAR99	HMC453ST89E
0.4 - 2.7	Power Amplifier, 2 Watt	16	48	8.5	33	+5V @ 700 mA	LP4	EAR99	HMC921LP4E
0.45 - 2.2	Power Amplifier, 1 Watt	22.5	48	7	30	+5V @ 485 mA	QS16G	EAR99	HMC452QS16GE
0.45 - 2.2	Power Amplifier, 1.6 Watt	21.5	51	6.5	33	+5V @ 725 mA	QS16G	EAR99	HMC453QS16GE
DC - 32	Power Amplifier, 1/2 Watt	14	36	4	28	+10V @ 250 mA	Chip	EAR99	HMC994
1.7 - 2.2	Power Amplifier, 1 Watt	27	46	5	30.5	+5V @ 500 mA	QS16G	EAR99	HMC457QS16GE
2.3 - 2.8	Power Amplifier, 1 Watt	31	45	5	32.5	+5V @ 430 mA	LP4	EAR99	HMC755LP4E
3 - 4	Power Amplifier, 1/2 Watt	21	40	5	27	+5V @ 250 mA	MS8G	EAR99	HMC327MS8GE
3.3 - 3.8	Power Amplifier, 1 Watt	31	45.5	5.8	30.5	+5V @ 615 mA	LP4	EAR99	HMC409LP4E
5.1 - 5.9	Power Amplifier, 1 Watt	20	43	6	30	+5V @ 750 mA	LP3	EAR99	HMC408LP3E
6 - 9.5	Power Amplifier, 1 Watt	21	40	-	30.5	+7V @ 820 mA	LP5	EAR99	HMC590LP5E
6 - 9.5	Power Amplifier, 2 Watt	18	41	-	33	+7V @ 1340 mA	LP5	3A001.b.2.b	HMC591LP5E
6 - 10	Power Amplifier, 1 Watt	25	41	-	31.5	+7V @ 820 mA	Chip	3A001.b.2.b	HMC590
6 - 10	Power Amplifier, 2 Watt	23	43	-	33.5	+7V @ 1340 mA	Chip	3A001.b.2.b	HMC591
7 - 9	Power Amplifier, 2 Watt	26	40	6.5	33.5	+7V @ 1.3A	Chip	3A001.b.2.b	HMC486
7 - 9	Power Amplifier, 2 Watt	22	40	7	32	+7V @ 1.3A	LP5	3A001.b.2.b	HMC486LP5E
9 - 12	Power Amplifier, 2 Watt	20	36	8	32	+7V @ 1.3A	LP5	3A001.b.2.b	HMC487LP5E
NEW! 9 - 13.3	Power Amplifier, 2 Watt	34	42	5.5	33	+6V @ 1400 mA	Chip	3A001.b.2.b	HMC952
NEW! 9 - 14	Power Amplifier, 2 Watt	33	43	-	34	+6V @ 1400 mA	LP5G	3A001.b.2.b	HMC952LP5GE
10 - 13	Power Amplifier, 1 Watt	19	38	-	31	+7V @ 750 mA	Chip	3A001.b.2.b	HMC592
12 - 16	Power Amplifier, 1 Watt	13	34	9	31	+7V @ 1.3A	LP5	3A001.b.2.b	HMC489LP5E
12.5 - 15.5	Power Amplifier, 2 Watt	30	42	-	34.5	+7V @ 1200 mA	Chip	3A001.b.2.b	HMC949

[1] Amplifiers that benefit from Hittite Active Bias Controllers

AMPLIFIERS

Frequency (GHz)	Function	Gain (dB)	OIP3 (dBm)	NF (dB)	P1dB (dBm)	Bias Supply	Package	ECCN Code	Part Number
12.5 - 15.5	Power Amplifier, 4 Watt	28	44	-	36	+7V @ 1200 mA	Chip	3A001.b.2.b	HMC950
12.5 - 15.5	Power Amplifier, 2 Watt	27	40	-	32	+6V @ 1200 mA	LP5	3A001.b.2.b	HMC965LP5E
12 - 16	PA with Power Detector, 3 Watt	27	41	-	34.5	+7V @ 1200 mA	LP5G	3A001.b.2.b	HMC995LP5GE
15 - 27	Power Amplifier, 1 Watt	17	37	-	29	+5V @ 1.44A	Chip	3A001.b.2.c	HMC-APH462
16 - 24	Power Amplifier, 1 Watt	23	41	-	31	+7V @ 790 mA	Chip	3A001.b.2.c	HMC756
16 - 24	Power Amplifier, 1/2 Watt	22	37	-	29	+7V @ 395 mA	Chip	EAR99	HMC757
16 - 24	Power Amplifier, 1/2 Watt	20.5	34.5	-	26.5	+5V @ 400 mA	LP4	EAR99	HMC757LP4E
18 - 20	Power Amplifier, 1 Watt	17.5	38.5	-	30	+5V @ 900 mA	Chip	3A001.b.2.c	HMC-APH478
21 - 24	Power Amplifier, 1 Watt	17	39	-	30.5	+5V @ 950 mA	Chip	3A001.b.2.c	HMC-APH518
22 - 26.5	Power Amplifier, 1/2 Watt	20	33	7	26.5	+5V @ 400 mA	LP4	EAR99	HMC863LP4E
22.5 - 26.5	Power Amplifier, 1 Watt	17	40	-	30	+5V @ 950 mA	Chip	3A001.b.2.c	HMC-APH608
24 - 29.5	Power Amplifier, 1/2 Watt	22	-	-	26.5	+6V @ 360 mA	Chip	EAR99	HMC863
24 - 29.5	Power Amplifier, 1 Watt	27	40	-	29	+6V @ 750 mA	Chip	3A001.b.2.c	HMC864
24 - 31.5	Power Amplifier, 1.5 Watt	22	43	-	34	+5.5V @ 1200 mA	LP5	3A001.b.2.c	HMC943LP5E
27 - 31.5	Power Amplifier, 1/2 Watt	14	37	-	28	+5V @ 900 mA	Chip	3A001.b.2.c	HMC-APH460
27 - 34	Power Amplifier, 1 Watt	17.5	37	-	29	+5V @ 800 mA	Chip	3A001.b.2.d	HMC693
27.3 - 33.5	Power Amplifier, 2 Watt	23	43	-	33	+6V @ 1200 mA	Chip	3A001.b.2.d	HMC906
NEW! 27.5 - 33.5	Power Amplifier, 1 Watt	24	40	-	29	+6V @ 600 mA	Chip	3A001.b.2.d	HMC1024
NEW! 29 - 37	Power Amplifier, 2 Watt	22	42	6	32	+6V @ 1200 mA	Chip	3A001.b.2.d	HMC1029
37 - 40	Power Amplifier, 1 Watt	15	37	-	28	+5V @ 1.08A	Chip	3A001.b.2.d	HMC-APH473
37 - 40	Power Amplifier, 1 Watt	21	38	-	30.5	+6V @ 900 mA	Chip	3A001.b.2.d	HMC968
40 - 43.5	Power Amplifier, 1 Watt	22	38	-	29	+6V @ 900 mA	Chip	EAR99	HMC969

Wideband (Distributed) Amplifiers

DC - 20	Wideband LNA	14	28	2.5	16	+8V @ 60 mA	Chip	EAR99	HMC460 [1]
DC - 20	Wideband LNA	14	29.5	2.5	17	+8V @ 75 mA	LC5	EAR99	HMC460LC5 [1]
2 - 20	Wideband LNA	15	26.5	2.5	15	+5V @ 63 mA	Chip	EAR99	HMC462
2 - 20	Wideband LNA	13	25	2.5	14	+5V @ 66 mA	LP5	EAR99	HMC462LP5E
2 - 20	Wideband LNA with AGC	14	28	2.5	19	+5V @ 60 mA	Chip	EAR99	HMC463 [1]
2 - 20	Wideband LNA with AGC	13	26	3	18	+5V @ 60 mA	LP5	EAR99	HMC463LP5E [1]
2 - 20	Wideband LNA with AGC	14	28	2.5	18	+5V @ 60 mA	LH250	EAR99	HMC463LH250
2 - 20	Wideband LNA	10	-	3.5	10	+2V @ 55 mA	Chip	EAR99	HMC-ALH102
2 - 22	Wideband LNA	16	-	1.7	14	+4V @ 45 mA	Chip	EAR99	HMC-ALH482
DC - 20	Wideband Driver	17	30	2.5	22	+8V @ 160 mA	Chip	EAR99	HMC465 [1]
DC - 20	Wideband Driver	15	28	3	23	+8V @ 160 mA	LP5	EAR99	HMC465LP5E [1]
DC - 35	Wideband Driver	15	-	-	21	+5V @ 200 mA	Chip	3A001.b.2.d	HMC-AUH249
DC - 43	Wideband Driver	14	-	5.4	16.5	+5V @ 180 mA	Chip	3A001.b.2.d	HMC-AUH232
0.5 - 65	Wideband Driver	10	-	-	-	+8V @ 60 mA	Chip	3A001.b.2.d	HMC-AUH312
2 - 35	Wideband Driver	12.5	27	3	18	+8V @ 80 mA	Chip	3A001.b.2.d	HMC562 [1]
5 - 17	Wideband Driver	31	30	8	23	+5V @ 180 mA	Chip	EAR99	HMC633 [1]
5 - 20	Wideband Driver	22	31	7.5	23	+5V @ 180 mA	Chip	EAR99	HMC634 [1]
5 - 20	Wideband Driver	21	29	7.5	22	+5V @ 180 mA	LC4	EAR99	HMC634LC4 [1]
5.5 - 17	Wideband Driver	30	30	8	23	+5V @ 180 mA	LC4	EAR99	HMC633LC4 [1]
18 - 40	Wideband Driver	19.5	29	8	23	+5V @ 280 mA	Chip	3A001.b.2.e	HMC635
18 - 40	Wideband Driver	18.5	27	7	22	+5V @ 280 mA	LC4	3A001.b.2.d	HMC635LC4
DC - 48	Wideband Power Amplifier	12	32	-	22	+10V @ 150 mA	Chip	3A001.b.2.f	HMC1022
DC - 6	Wideband Power Amplifier	14	45	5	29	+12V @ 400 mA	Chip	EAR99	HMC637
DC - 6	Wideband Power Amplifier	13	40	5	29	+12V @ 400 mA	LP5	EAR99	HMC637LP5E
DC - 10	Wideband Power Amplifier	12	41	6	28.5	+12V @ 300 mA	Chip	EAR99	HMC619
DC - 10	Wideband Power Amplifier	12	41	6	28	+12V @ 300 mA	LP5	EAR99	HMC619LP5E
DC - 15	Wideband Power Amplifier	19	35	2	26.5	+8V @ 300 mA	Chip	EAR99	HMC659
DC - 15	Wideband Power Amplifier	19	35	2.5	27.5	+8V @ 300 mA	LC5	EAR99	HMC659LC5
DC - 18	Wideband Power Amplifier	17	32	3	25	+8V @ 290 mA	Chip	EAR99	HMC459
DC - 20	Wideband Power Amplifier	14	36	4	28	+10V @ 400 mA	Chip	3A001.b.2.c	HMC559
DC - 22	Wideband Power Amplifier	14	40	2.5	28	+11V @ 400 mA	Chip	3A001.b.2.c	HMC797
DC - 22	Wideband Power Amplifier	13.5	39	4	28	+10V @ 400 mA	LP5	EAR99	HMC797LP5E
DC - 40	Wideband Power Amplifier	13	33.5	5	22	+10V @ 175 mA	Chip	3A001.b.2.d	HMC930 [1]
0.2 - 22	Wideband Power Amplifier	13	38	3	27	+11V @ 365 mA	Chip	EAR99	HMC907
0.2 - 22	Wideband Power Amplifier	12	36	3.5	26	+10V @ 350 mA	LP5	EAR99	HMC907LP5E

[1] Amplifiers that benefit from Hittite Active Bias Controllers

SMT & Chip (Die) Products

AMPLIFIERS

Frequency (GHz)	Function	Gain (dB)	OIP3 (dBm)	NF (dB)	P1dB (dBm)	Bias Supply	Package	ECCN Code	Part Number
2 - 20	Wideband Power Amplifier	16	30	4	26	+8V @ 290 mA	Chip	EAR99	HMC464
2 - 20	Wideband Power Amplifier	14	30	4	26	+8V @ 290 mA	LP5	EAR99	HMC464LP5E

[1] Amplifiers that benefit from Hittite Active Bias Controllers

AMPLIFIERS - Low Phase Noise

Frequency (GHz)	Function	Gain / NF (dB)	OIP3 (dBm)	10 kHz SSB Phase Noise (dBc/Hz)	P1dB / Psat (dBm)	Bias Supply	Package	ECCN Code	Part Number
2 - 18	Wideband, Low Phase Noise	14 / 4.5	27	-160	15 / 18	+5V @ 64 mA	Chip	EAR99	HMC606
2 - 18	Wideband, Low Phase Noise	13.5 / 5	27	-160	15 / 17	+5V @ 64 mA	LC5	EAR99	HMC606LC5

ATTENUATORS

Frequency (GHz)	Function	Insertion Loss (dB)	Attenuation Range (dB)	IIP3 (dBm)	Control Input (Vdc)	Package	ECCN Code	Part Number
-----------------	----------	---------------------	------------------------	------------	---------------------	---------	-----------	-------------

Attenuators - Analog

0.45 - 2.2	Analog VVA	1.9	0 to 48	20	0 to +3V	MS8	EAR99	HMC473MS8E
0.5 - 6.0	Analog VVA	2.5	0 to 26	35	0 to +5V	LP3	EAR99	HMC973LP3E
DC - 8	Analog VVA	1.5	0 to 32	10	0 to -3V	MS8G	EAR99	HMC346MS8GE
DC - 8	Analog VVA	2	0 to 30	10	0 to -3V	C8	EAR99	HMC346C8
DC - 8	Analog VVA	2	0 to 30	10	0 to -3V	G8 Hermetic	EAR99	HMC346G8
DC - 14	Analog VVA	2	0 to 30	10	0 to -3V	LP3	EAR99	HMC346LP3E
DC - 18	Analog VVA	1.5	0 to 30	10	0 to -3V	LC3B	EAR99	HMC346LC3B
DC - 20	Analog VVA	2.2	0 to 25	10	0 to -3V	Chip	EAR99	HMC346
5 - 26.5	Analog VVA	3.5	0 to 28	32	0 to -3V	LP3C	EAR99	HMC712LP3CE
5 - 30	Analog VVA	2.5	0 to 30	32	0 to -3V	Chip	EAR99	HMC712
5 - 30	Analog VVA	2	0 to 28	28	0 to -3V	LC4	EAR99	HMC812LC4
17 - 27	Analog VVA	1.5	0 to 22	17	-4 to +4V	Chip	5A991.h	HMC-VVD102
20 - 50	Analog VVA	3	0 to 35	33	0 to +3V	Chip	EAR99	HMC985
36 - 50	Analog VVA	1.5	0 to 22	17	0 to +4V	Chip	5A991.h	HMC-VVD106
70 - 86	Analog VVA	2	0 to 14	-	-5 to +5V	Chip	5A991.h	HMC-VVD104

Attenuators - Digital

DC - 5	1-Bit Digital	1	10	50	TTL/CMOS	LP3	EAR99	HMC541LP3E
DC - 10	1-Bit Digital	2	10	54	0 / +3 to +5V	LP3	EAR99	HMC800LP3E
DC - 10	1-Bit Digital	1.5	15	53	0 / +3 to +5V	LP3	EAR99	HMC801LP3E
DC - 10	1-Bit Digital	2.5	20	53	0 / +3 to +5V	LP3	EAR99	HMC802LP3E
0.7 - 4.0	2-Bit Digital	0.5	2 to 6	52	0 / +3V	SOT26	EAR99	HMC290E
0.7 - 4.0	2-Bit Digital	0.9	4 to 12	54	0 / +3V	SOT26	EAR99	HMC291E
DC - 6	2-Bit Digital	0.5	2 to 6	50	TTL/CMOS	LP3	EAR99	HMC467LP3E
0.75 - 2.0	3-Bit Digital	1.8	4 to 28	45	0 / +3V	MS8	EAR99	HMC230MS8E
0.7 - 3.7	3-Bit Digital	1.3	2 to 14	51	0 / +3V	MS8	EAR99	HMC288MS8E
DC - 6	3-Bit Digital	0.7	1 to 7	50	TTL/CMOS	LP3	EAR99	HMC468LP3E
DC - 5.5	4-Bit Digital	0.8	1 to 15	50	TTL/CMOS	LP3	EAR99	HMC540LP3E
DC - 6	4-Bit Digital, Serial & Parallel Control	2.5	3 to 45	50	0 / +5V	LP4	EAR99	HMC629LP4E
0.1 - 30	5-Bit Digital	2.5	0.5 to 15.5	45	0 / +3 to +5V	Chip	EAR99	HMC941
0.1 - 30	5-Bit Digital, Serial Control	5	1 to 31	43	0 / +3 to +5V	LP4	EAR99	HMC1018LP4E
0.1 - 30	5-Bit Digital, Serial Control	4	0.5 to 15.5	45	0 / +3 to +5V	LP4	EAR99	HMC1019LP4E
0.1 - 33	5-Bit Digital	5	1 to 31	43	0 / +3 to +5V	LP4	EAR99	HMC939LP4E
0.1 - 33	5-Bit Digital	4	0.5 to 15.5	45	0 / +3 to +5V	LP4	EAR99	HMC941LP4E
0.1 - 40	5-Bit Digital	3.5	1 to 31	43	0 / +3 to +5V	Chip	EAR99	HMC939
0.7 - 2.7	5-Bit Digital	2.3	1 to 31	54	0 / +3V	QS16	EAR99	HMC274QS16E
0.7 - 3.7	5-Bit Digital, Serial Control	2.1	1 to 31	48	Serial/CMOS	LP4	EAR99	HMC271ALP4E
0.7 - 3.8	5-Bit Digital	2.1	1 to 31	48	0 / +3V	MS10G	EAR99	HMC273MS10GE
0.7 - 3.8	5-Bit Digital, Serial Control	1.5	0.5 to 15.5	52	Serial/CMOS	LP4	EAR99	HMC305ALP4E
0.7 - 3.8	5-Bit Digital	1.5	0.5 to 15.5	52	0 / +3V	MS10	EAR99	HMC306MS10E
0.7 - 3.8	5-Bit Digital	1.3	0.5 to 15.5	48	0 / +3V	MS10	EAR99	HMC603MS10E
0.7 - 3.8	5-Bit Digital	1.3	0.5 to 15.5	48	0 / +3V	QS16	EAR99	HMC603QS16E
DC - 3	5-Bit Digital	2.0	1 to 31	44	0 / -5V	G16 Hermetic	EAR99	HMC335G16
DC - 3	5-Bit Digital	1.3	1 to 31	45	TTL/CMOS	LP3	EAR99	HMC470LP3E
DC - 4	5-Bit Digital	1.9	1 to 31	44	0 / -5V	QS16G	EAR99	HMC307QS16GE
DC - 4	5-Bit Digital	0.7	0.25 to 7.75	50	TTL/CMOS	LP3	EAR99	HMC539LP3E
0.06 - 0.5	6-Bit Digital, Serial & Parallel Control	1.2	0.5 to 31.5	55	0 / +3 to +5V	LP4	EAR99	HMC624LFLP4E

ATTENUATORS

Frequency (GHz)	Function	Insertion Loss (dB)	Attenuation Range (dB)	IIP3 (dBm)	Control Input (Vdc)	Package	ECCN Code	Part Number
DC - 3.8	6-Bit Digital	1.5	0.5 to 31.5	45	TTL/CMOS	LP4	EAR99	HMC472LP4E
DC - 3	6-Bit Digital	3.0	0.5 to 31.5	32	0 / -5V	G16 Hermetic	EAR99	HMC424G16
DC - 4	6-Bit Digital, Serial Control	1.2	0.5 to 31.5	45	Serial/CMOS	LP4	EAR99	HMC542ALP4E
DC - 6	6-Bit Digital, Serial & Parallel Control	1.8	0.5 to 31.5	55	0 / +5V	LP4	EAR99	HMC624LP4E
DC - 6	6-Bit Digital, Serial & Parallel Control	1.8	0.25 to 15.75	55	TTL/CMOS	LP4	EAR99	HMC792LP4E
DC - 13	6-Bit Digital	4.0	0.5 to 31.5	32	0 / -5V	Chip	EAR99	HMC424
DC - 13	6-Bit Digital	3.2	0.5 to 31.5	32	0 / -5V	LH5 Hermetic	EAR99	HMC424LH5
DC - 13	6-Bit Digital	4.0	0.5 to 31.5	32	0 / -5V	LP3	EAR99	HMC424LP3E
2.4 - 8.0	6-Bit Digital	3.5	0.5 to 31.5	40	0 / +5V	Chip	EAR99	HMC425
2.2 - 8.0	6-Bit Digital	3.2	0.5 to 31.5	40	0 / +5V	LP3	EAR99	HMC425LP3E
0.01 - 0.3	7-Bit Digital	3.3	0.25 to 31.75	40	TTL/CMOS	LP3	EAR99	HMC759LP3E

AUTOMATIC GAIN CONTROL

Frequency (MHz)	Function	Gain Control Range (dB)	NF (dB)	OIP3 (dBm)	P1dB (dBm)	Bias Supply	Package	ECCN Code	Part Number
50 - 800	IF Automatic Gain Controller	-10 to +38	6	40	19	+5V @ 215 mA	LP5	EAR99	HMC992LP5E
700 - 3000	RF Automatic Gain Controller	-11 to +32	7.6	46	25	+5V @ 260 mA	LP5	EAR99	HMC993LP5E

DC POWER CONDITIONING - Linear Voltage Regulators

Input Voltage (V)	Function	Output Voltage (V)	Output Current (mA)	Power Supply Rejection Ratio (PSRR) (dB)		Output Noise Spectral Density (nV/√Hz)		Regulated Outputs	Package	ECCN Code	Part Number
				1 kHz	1 MHz	1 kHz	10 kHz				
3.35 - 5.6	Quad High PSRR	2.5 - 5.2	15 - 100	80	60	7	3	4	LP3	EAR99	HMC860LP3E
3.35 - 5.6	Low Noise, High PSRR	1.8 - 5.2	500	80	60	7	3	4	LP3	EAR99	HMC1060LP3E
4.8 to 5.6	Low Noise, High PSRR	1.8 to 5.1	400	60	30	6	3	1	LP3	EAR99	HMC976LP3E

FILTERS - Tunable

Programmable Harmonic

Frequency Range (GHz)	Function	Return Loss (dB)	3 dB Bandwidth (GHz)	Stopband Frequency (Rej. >10 dB)	Tuning Response (ns)	Package	ECCN Code	Part Number
NEW! 0.25 - 3.025	Programmable Harmonic Low Pass	10	1 - 3	1.2 Fcutoff	10	LP3	EAR99	HMC1044LP3E

Band Pass

Frequency Range (GHz)	Function	Return Loss (dB)	3 dB Bandwidth (%)	Low Side Rejection Frequency (Rej. >20 dB)	High Side Rejection Frequency (Rej. >20 dB)	Tuning Response (ns)	Package	ECCN Code	Part Number
1 - 2	Band Pass	10	11	0.8 x Fcenter	1.2 x Fcenter	200	LP5	EAR99	HMC890LP5E
2 - 3.9	Band Pass	10	9	0.9 x Fcenter	1.15 x Fcenter	200	LP5	EAR99	HMC891LP5E
4 - 7.7	Band Pass	15	9	0.9 x Fcenter	1.13 x Fcenter	200	LP5	EAR99	HMC892LP5E
4.8 - 9.5	Band Pass	7	6.5	0.9 x Fcenter	1.1 x Fcenter	200	LP5	EAR99	HMC893LP5E
5.9 - 11.2	Band Pass	7.5	6	0.92 x Fcenter	1.08 x Fcenter	200	LP5	EAR99	HMC894LP5E
6.8 - 12.6	Band Pass	12	10	0.88 x Fcenter	1.1 x Fcenter	200	LP4	EAR99	HMC895LP4E
NEW! 9 - 19	Band Pass	9.5	18	0.81 x Fcenter	1.17 x Fcenter	200	Chip	EAR99	HMC897
9 - 19	Band Pass	9.5	18	0.81 x Fcenter	1.17 x Fcenter	200	LP4	EAR99	HMC897LP4E
10 - 18	Band Pass	11	9	0.89 x Fcenter	1.1 x Fcenter	200	LP4	EAR99	HMC896LP4E
11.5 - 21.5	Band Pass	9	17	0.81 x Fcenter	1.16 x Fcenter	200	LP4	EAR99	HMC898LP4E
18.5 - 37.0	Band Pass	10	18	0.81 x Fcenter	1.20 x Fcenter	200	LP4	EAR99	HMC899LP4E
19 - 38	Band Pass	10	18	0.81 x Fcenter	1.20 x Fcenter	< 100	Chip	EAR99	HMC899

Low Pass

Frequency Range (GHz)	Function	Return Loss (dB)	Cutoff Frequency Range (GHz)	Stopband Frequency (Rej. >20 dB)	Tuning Response (ns)	Package	ECCN Code	Part Number
DC - 4.0	Low Pass	10	2.2 - 4.0	1.25 x Fcutoff	150	LP5	EAR99	HMC881LP5E
DC - 7.6	Low Pass	10	4.5 - 7.6	1.23 x Fcutoff	150	LP5	EAR99	HMC882LP5E

Band Reject

Frequency Range (GHz)	Function	Rejection Band Tuning Freq. (GHz)	Pass Band Insertion Loss (dB)	Stop Band Rejection (dB)	20 dB Bandwidth (%)	Tuning Response (ns)	Package	ECCN Code	Part Number
0.1 - 25	Band Reject	3.6 - 12.2	3	25	8	200	LP5	EAR99	HMC1000LP5E

SMT & Chip (Die) Products

IF / BASEBAND PROCESSING - Dual Baseband Low Pass Filter & Dual Baseband Digital VGA

Dual Baseband Low Pass Filter

3 dB Bandwidth Setting (MHz)	Function	3 dB Bandwidth Accuracy (%)	Gain (dB)	NF (dB)	OIP3 (dBm)	Package	ECCN Code	Part Number
3.5 - 50	Dual Low Pass with ADC Driver	± 2.5	0 / 10	12	30	LP5	EAR99	HMC900LP5E

Please Note: 400 Ohm Reference Impedance Are Shown

Dual Baseband Digital VGA

Frequency (MHz)	Function	NF (dB)	Variable Gain (dB)	OIP3 (dBm)	OIP2 (dBm)	Sideband Supp. (dB)	Magnitude (dB) / Phase (deg) Balance	Bias Supply	Package	ECCN Code	Part Number
DC - 100	Digital, Serial & Parallel Control	6	0 to 40	+30	+65	55	±0.1 / ±1	+5V @ 70 mA	LP4	EAR99	HMC960LP4E

Please Note: 100 Ohm Reference Impedance Are Shown

I/Q MIXERS / IRMs

RF Frequency (GHz)	Function	IF Frequency (GHz)	Conversion Gain (dB)	Image Rejection (dB)	IIP3 (dBm)	Package	ECCN Code	Part Number
3 - 7	I/Q Mixer / IRM	DC - 3.5	-7.5	33	23	Chip	EAR99	HMC620
3 - 7	I/Q Mixer / IRM	DC - 3.5	-7.5	32	22	LC4	EAR99	HMC620LC4
4 - 8.5	I/Q Mixer / IRM	DC - 3.5	-7.5	40	23	Chip	EAR99	HMC525
4 - 8.5	I/Q Mixer / IRM	DC - 3.5	-7.5	40	23	LC4	EAR99	HMC525LC4
5.9 - 12.0	I/Q Mixer / IRM	DC - 1.5	-8	30	18	Chip	EAR99	HMC256
6 - 10	I/Q Mixer / IRM	DC - 3.5	-7	40	22	Chip	EAR99	HMC520
6 - 10	I/Q Mixer / IRM	DC - 3.5	-7	40	23	LC4	EAR99	HMC520LC4
6 - 10	I/Q Mixer / IRM	DC - 3.5	-7.5	40	28	Chip	EAR99	HMC526
6 - 10	I/Q Mixer / IRM	DC - 3.5	-7.5	40	28	LC4	EAR99	HMC526LC4
8.5 - 13.5	I/Q Mixer / IRM	DC - 3.5	-7.5	40	24	Chip	EAR99	HMC521
8.5 - 13.5	I/Q Mixer / IRM	DC - 3.5	-7.5	38	24	LC4	EAR99	HMC521LC4
8.5 - 13.5	I/Q Mixer / IRM	DC - 2	-7.5	35	28	Chip	EAR99	HMC527
8.5 - 13.5	I/Q Mixer / IRM	DC - 2	-7.5	34	28	LC4	EAR99	HMC527LC4
10 - 16	I/Q Mixer / IRM	DC - 3.5	-8	25	25	LC5	EAR99	HMC775LC5
11 - 16	I/Q Mixer / IRM	DC - 3.5	-7.5	35	24	Chip	EAR99	HMC522
11 - 16	I/Q Mixer / IRM	DC - 3.5	-7.5	35	24	LC4	EAR99	HMC522LC4
11 - 16	I/Q Mixer / IRM	DC - 3.5	-8	35	27	Chip	EAR99	HMC528
11 - 16	I/Q Mixer / IRM	DC - 3.5	-8	35	26	LC4	EAR99	HMC528LC4
15 - 23	I/Q Mixer / IRM	DC - 3.5	-8	25	25	LC4	EAR99	HMC523LC4
15 - 23.6	I/Q Mixer / IRM	DC - 3.5	-8	27	25	Chip	EAR99	HMC523
15 - 33.5	I/Q Mixer / IRM	DC - 3.5	-10	40	22	LC4	EAR99	HMC1042LC4
17 - 27	I/Q Mixer / IRM	DC - 3.5	-9	36	20	LC4	EAR99	HMC1041LC4
19 - 33	I/Q Mixer / IRM	DC - 5	-8	25	17	Chip	5A001.h	HMC-MDB172
22 - 32	I/Q Mixer / IRM	DC - 3.5	-10	23	20	Chip	EAR99	HMC524
22 - 32	I/Q Mixer / IRM	DC - 4.5	-10	20	20	LC3B	EAR99	HMC524LC3B
15 - 33.5	I/Q Mixer / IRM	DC - 3.5	-10	30	22	LC4	EAR99	HMC1042LC4
31 - 38	I/Q Mixer / IRM	DC - 3.5	-10.5	17	21	Chip	EAR99	HMC555
35 - 45	I/Q Mixer / IRM	DC - 5	-8	25	17	Chip	5A991.h	HMC-MDB171
36 - 41	I/Q Mixer / IRM	DC - 3.5	-11	18	23	Chip	EAR99	HMC556
55 - 64	I/Q Mixer / IRM	DC - 3	-9	30	16	Chip	5A991.h	HMC-MDB207
26 - 33 RF	Sub-Harmonic, I/Q Mixer / IRM	DC - 3	-11	22	16	Chip	EAR99	HMC404
54 - 64 RF	Sub-Harmonic, I/Q Mixer / IRM	DC - 3	-12.5	30	7	Chip	5A991.h	HMC-MDB218

NEW!

I/Q DOWNCONVERTER / RECEIVERS

RF Frequency (GHz)	Function	IF Frequency (GHz)	Conversion Gain (dB)	Noise Figure (dB)	Image Rejection (dB)	IIP3 (dBm)	Package	ECCN Code	Part Number
5.6 - 8.6	I/Q Downconverter / Receiver	DC - 3	12	2.2	20	2	LP4	EAR99	HMC951LP4E
7 - 9	I/Q Downconverter / Receiver	DC - 3.5	10	2.5	35	1.5	LC5	EAR99	HMC567LC5
9 - 12	I/Q Downconverter / Receiver	DC - 3.5	11	2.2	25	2	LC5	EAR99	HMC908LC5
12 - 16	I/Q Downconverter / Receiver	DC - 3.5	14	2.8	32	-1	LC5	EAR99	HMC869LC5
17 - 20	I/Q Downconverter / Receiver	DC - 3.5	14	2.5	40	0	LP4	EAR99	HMC966LP4E
17 - 21	I/Q Downconverter / Receiver	DC - 3.5	10	3	17	3	Chip	EAR99	HMC570
17 - 21	I/Q Downconverter / Receiver	DC - 3.5	10	3	18	2	LC5	EAR99	HMC570LC5
17 - 24	I/Q Downconverter / Receiver	DC - 3.3	11	2.2	21	2	LC5	EAR99	HMC904LC5
17 - 24	I/Q Downconverter / Receiver	DC - 3.5	15	2.5	25	1	LP4	EAR99	HMC967LP4E
20 - 28	I/Q Downconverter / Receiver	DC - 3.5	14	2.5	21	1	LP4	EAR99	HMC977LP4E
21 - 25	I/Q Downconverter / Receiver	DC - 3.5	11	3	24	5	Chip	EAR99	HMC571
21 - 25	I/Q Downconverter / Receiver	DC - 3.5	10	2	20	5	LC5	EAR99	HMC571LC5
24 - 28	I/Q Downconverter / Receiver	DC - 3.5	8	3.5	20	5	Chip	EAR99	HMC572
24 - 28	I/Q Downconverter / Receiver	DC - 3.5	8	3.5	18	5	LC5	EAR99	HMC572LC5

I/Q UPCONVERTER / TRANSMITTERS

RF Frequency (GHz)	Function	IF Frequency (GHz)	Conversion Gain (dB)	Sideband Rejection (dBc)	OIP3 (dBm)	Package	ECCN Code	Part Number
5.5 - 8.6	I/Q Upconverter / Transmitter w/ VGA	DC - 3	16.5	-30	29	LC5	EAR99	HMC925LC5
10 - 16	I/Q Upconverter / Transmitter w/ VGA	DC - 3	17	-30	14	LC5	EAR99	HMC924LC5
11 - 17	I/Q Upconverter / Transmitter	DC - 2	13	-20	26	LC5	EAR99	HMC709LC5
16 - 21	I/Q Upconverter / Transmitter	DC - 3.5	12	-20	30	LC5	EAR99	HMC710LC5
17.7 - 23.6	I/Q Upconverter / Transmitter	DC - 3.5	15	-35	35	LC5	EAR99	HMC819LC5
21 - 27	I/Q Upconverter / Transmitter	DC - 3.75	12	-20	27	LC5	EAR99	HMC815LC5

MIXERS

RF Frequency (GHz)	Function	IF Frequency (GHz)	Conversion Gain (dB)	LO / RF Isolation (dB)	IIP3 (dBm)	Package	ECCN Code	Part Number
--------------------	----------	--------------------	----------------------	------------------------	------------	---------	-----------	-------------

High IP3 Mixers

0.4 - 0.65	High IP3, 0 LO	DC - 0.25	-9	7	33	MS8G	EAR99	HMC585MS8GE
0.45 - 0.5	High IP3, SGL-END	DC - 0.15	-9.5	20	32	MS8	EAR99	HMC387MS8E
0.5 - 2.7	High IP3, DBL-BAL, +2 LO	DC - 1	-8	28	28	LP4	EAR99	HMC915LP4E
0.7 - 1.0	High IP3, SGL-END	DC - 0.25	-8.5	24	35	MS8	EAR99	HMC399MS8E
0.7 - 1.0	High IP3, DBL-BAL, 0 LO	DC - 0.45	-7	23	32	LP4	EAR99	HMC684LP4E
0.7 - 1.1	High IP3, DBL-BAL, 0 LO	0.05 - 0.25	-7.5	24	40	LP4	EAR99	HMC786LP4
0.7 - 1.2	High IP3, DBL-BAL	DC - 0.3	-9	42	25	S8	EAR99	HMC351S8E
0.7 - 1.5	High IP3, 0 LO	DC - 0.35	-9	20	33	MS8G	EAR99	HMC483MS8GE
0.7 - 1.5	High IP3, DBL-BAL, 0 LO	DC - 0.5	-7.5	24	34	LP4	EAR99	HMC686LP4E
0.8 - 1.2	High IP3, DBL-BAL, 0 LO	DC - 0.3	-8	27	27	LP4	EAR99	HMC551LP4E
1.5 - 3.5	High IP3, DBL-BAL	DC - 1	-8	38	25	MS8	EAR99	HMC316MS8E
1.6 - 3.0	High IP3, DBL-BAL, 0 LO	DC - 1	-8	30	25	LP4	EAR99	HMC552LP4E
1.7 - 2.2	High IP3, SGL-END	DC - 0.3	-8.8	30	36	MS8	EAR99	HMC400MS8E
1.7 - 2.2	High IP3, DBL-BAL, 0 LO	DC - 0.5	-8	30	35	LP4	EAR99	HMC685LP4E
1.7 - 2.2	High IP3, DBL-BAL, 0 LO	DC - 0.5	-8	31	34	LP4	EAR99	HMC687LP4E
1.7 - 2.2	High IP3, DBL-BAL, 0 LO	0.05 - 0.30	-8	30	38	LP4	EAR99	HMC785LP4E
1.7 - 2.4	High IP3, SGL-END	0.05 - 0.3	-9.2	10	34	MS8G	EAR99	HMC485MS8GE
1.7 - 3.0	High IP3, SGL-BAL	DC - 0.8	-9	30	30	MS8	EAR99	HMC304MS8E
1.7 - 4.0	High IP3, DBL-BAL, +4 LO	DC - 1.0	-8	32	25	LP4	EAR99	HMC215LP4E
1.8 - 2.2	High IP3, SGL-END	DC - 0.5	-8.5	25	31	MS8	EAR99	HMC402MS8E
2.0 - 2.7	High IP3, DBL-BAL, 0 LO	DC - 0.45	-7.5	25	31	LP4	EAR99	HMC688LP4E
2.0 - 2.7	High IP3, DBL-BAL, 0 LO	DC - 0.45	-7.5	26	31	LP4	EAR99	HMC689LP4E
2.3 - 4.0	High IP3, +4 LO	DC - 1	-10	15	35	LP4	EAR99	HMC615LP4E
2.4 - 4.0	High IP3, SGL-END	DC - 1	-10	30	34	MS8	EAR99	HMC214MS8E
3.1 - 3.9	High IP3, DBL-BAL, 0 LO	DC - 0.6	-8.5	28	30	LP4	EAR99	HMC666LP4E
6 - 12	High IP3, DBL-BAL	DC - 4	-8	40	30	LC3	EAR99	HMC663LC3
9 - 15	High IP3, DBL-BAL	DC - 2.5	-7.5	40	24	MS8G	EAR99	HMC410AMS8GE

Downconverter RF ICs

NEW!	0.7 - 3.5	High IP3 Dual Downconverter	0.05 - 0.35	7	55	+25	LP4	EAR99	HMC990LP4E
	0.7 - 1.0	Downconverter	0.05 - 0.25	12.5	25	15	QS16	EAR99	HMC420QS16E
	0.7 - 1.0	High IP3, Dual Downconverter	0.06 - 0.5	7.5	16	23	LP6C	EAR99	HMC683LP6CE
	0.8 - 0.96	High IP3 Dual Downconverter	0.05 - 0.3	9	4	26	LP6	EAR99	HMC581LP6E
	0.8 - 1.0	High IP3 Downconverter	0.05 - 0.25	13.8	28	15	QS16G	EAR99	HMC377QS16GE
	0.8 - 2.7	Hi-IP3 Wideband Downconverter	0.001 - 0.6	-1	48	26	LP4	EAR99	HMC334LP4E
	0.9 - 1.6	Hi-IP3 Downconverter with RF Amplifier	0.05 - 0.5	30	45	6	LP4	EAR99	HMC621LP4E
	1.4 - 2.3	High IP3 Downconverter	0.05 - 0.3	9	33	19	QS16G	EAR99	HMC421QS16E
	1.7 - 2.2	High IP3 Downconverter	0.05 - 0.3	11	25	19	QS16G	EAR99	HMC380QS16GE
	1.7 - 2.2	High IP3, Dual Downconverter	50 - 300	9	10	27	LP6	EAR99	HMC381LP6E
	1.7 - 2.2	High IP3, Dual Downconverter	0.06 - 0.4	6	25	25	LP6C	EAR99	HMC682LP6CE
	1.8 - 2.7	High IP3 Downconverter with RF Amplifier	0.05 - 0.65	33	45	11	LP4	EAR99	HMC623LP4E

0 to +7 dBm LO Double & Single Balanced Mixers

0.6 - 1.3	Low LO, DBL-BAL	DC - 0.4	-8	35	15	MS8	EAR99	HMC423MS8E
0.7 - 1.2	0 LO, DBL-BAL	0.25 - 0.45	10	36	23	LP4	EAR99	HMC665LP4E
1.2 - 2.6	Low LO, DBL-BAL	DC - 1	-8	30	15	MS8	EAR99	HMC422MS8E
1.8 - 3.9	+3 LO, DBL-BAL	0.2 - 0.55	9	33	23	LP4	EAR99	HMC622LP4E
3 - 3.8	Low LO, SGL-BAL	DC - 1	-8.5	15	10	SOT26	EAR99	HMC333E

SMT & Chip (Die) Products

MIXERS

RF Frequency (GHz)	Function	IF Frequency (GHz)	Conversion Gain (dB)	LO / RF Isolation (dB)	IIP3 (dBm)	Package	ECCN Code	Part Number
4 - 7	0 LO, DBL-BAL	DC - 2.5	-7	32	15	MS8G	EAR99	HMC488MS8GE
4.5 - 6.0	+7 LO, DBL-BAL	DC - 1.6	-7	30	18	MS8	EAR99	HMC218MS8E
+10 dBm LO Double & Single Balanced Mixers								
0.7 - 2.0	+10 LO, DBL-BAL	DC - 0.3	-9	45	17	S8	EAR99	HMC207AMS8E
0.7 - 2.0	+10 LO, DBL-BAL	DC - 0.5	-9	24	17	MS8	EAR99	HMC208AMS8E
1.5 - 4.5	+10 LO, DBL-BAL	DC - 1.5	-8.5	40	19	MS8	EAR99	HMC213AMS8E
1.7 - 3.0	+10 LO, SGL-BAL	DC - 0.8	-9	30	21	MS8	EAR99	HMC272AMS8E
1.7 - 3.5	+10 LO, SGL-BAL	DC - 0.9	-9	30	21	SOT26	EAR99	HMC285E
4.5 - 8.0	+10 LO, DBL-BAL	DC - 2	-8.2	35	16	C8	EAR99	HMC168C8
5 - 12	+10 LO, DBL-BAL	DC - 4	-7.5	25	17	MS8	EAR99	HMC220AMS8E
7 - 10	+10 LO, DBL-BAL	DC - 2	-9	32	16	C8	EAR99	HMC171C8
+13 to +14 dBm LO Double & Triple Balanced Mixers								
0.7 - 1.2	+13 LO, SGL-BAL	DC - 0.3	-9	26	21	MS8	EAR99	HMC277MS8E
1.7 - 4.5	+13 LO, DBL-BAL	DC - 1	-8	30	20	MS8	EAR99	HMC175MS8E
1.7 - 4.5	+13 LO, Dual Channel	DC - 1.5	-8	-	23	LP5	EAR99	HMC340ALP5E
NEW! 2 - 18	Double Balance Mixer	DC - 2	-10	35	19	LC3B	EAR99	HMC1048LC3B
2.5 - 4.0	+13 LO, DBL-BAL	DC - 2	-9	45	18	C8	EAR99	HMC170C8
4.5 - 9.0	+13 LO, DBL-BAL	DC - 2.5	-8.5	25	21	MS8	EAR99	HMC219AMS8E
6 - 26	+13 LO, DBL-BAL	DC - 10	-9	32	20	Chip	EAR99	HMC773
6 - 26	+13 LO, DBL-BAL	DC - 8	-9	38	22	LC3B	EAR99	HMC773LC3B
7 - 14	+13 LO, DBL-BAL	DC - 5	-7	48	22	Chip	EAR99	HMC553
7 - 14	+13 LO, DBL-BAL	DC - 5	-7	50	22	LC3B	EAR99	HMC553LC3B
7 - 34	+13 LO, DBL-BAL	DC - 8	-11	35	22	LC3B	EAR99	HMC774LC3B
7 - 43	+13 LO, DBL-BAL	DC - 10	-9	35	22	Chip	EAR99	HMC774
9 - 15	+13 LO, DBL-BAL	DC - 2.5	-7.5	40 - 50	17	MS8G	EAR99	HMC412AMS8GE
10 - 15	+13 LO, SGL-BAL	DC - 3	-9	27	16	MS8G	EAR99	HMC411MS8GE
11 - 20	+13 LO, DBL-BAL	DC - 6	-7	46	18	Chip	EAR99	HMC554
11 - 20	+13 LO, DBL-BAL	DC - 6	-7	46	18	LC3B	EAR99	HMC554LC3B
14 - 26	+13 LO, DBL-BAL	DC - 8	-7.5	39	20	Chip	EAR99	HMC260
14 - 26	+13 LO, DBL-BAL	DC - 8	-7.5	38	20	LC3B	EAR99	HMC260LC3B
16 - 30	+13 LO, DBL-BAL	DC - 8	-8	40	21	LC3B	EAR99	HMC292LC3B
17 - 31	+13 LO, DBL-BAL	DC - 6	-8	32	19	LM3C	EAR99	HMC292LM3C
18 - 32	+13 LO, DBL-BAL	DC - 8	-7.5	38	19	Chip	EAR99	HMC292
24 - 32	+13 LO, DBL-BAL	DC - 8	-10	38	19	LC3B	EAR99	HMC329LC3B
24 - 40	+13 LO, DBL-BAL	DC - 18	-8	35	21	Chip	EAR99	HMC560
24 - 40	+13 LO, DBL-BAL	DC - 17	-10	35	21	LM3	EAR99	HMC560LM3
25 - 40	+13 LO, DBL-BAL	DC - 8	-9.5	42	19	Chip	EAR99	HMC329
26 - 32	+13 LO, TPL-BAL	16 - 22	-10	45	22	Chip	EAR99	HMC1015
26 - 32	+13 LO, TPL-BAL	16 - 22	-10	45	23	LC3	EAR99	HMC1043LC3
26 - 40	+13 LO, DBL-BAL	DC - 8	-8	37	19	LM3	EAR99	HMC329LM3
54 - 64	+13 LO, DBL-BAL	DC - 5	-8	30	13	Chip	5A991.h	HMC-MDB169
70 - 90	+14 LO, DBL-BAL	DC - 18	-12	-	-	Chip	5A991.h	HMC-MDB277
+15 to +20 dBm LO Single, & Double Balanced Mixers								
1.8 - 5.0	+15 LO, DBL-BAL	DC - 3	-7	42	18	Chip	EAR99	HMC128
1.8 - 5.0	+15 LO, DBL-BAL	DC - 2	-10	40	18	G8 Hermetic	EAR99	HMC128G8
2.5 - 7	+15 LO, DBL-BAL	DC - 3	-7	48	22	Chip	EAR99	HMC557
2.5 - 7	+15 LO, DBL-BAL	DC - 3	-7	48	22	LC4	EAR99	HMC557LC4
4 - 8	+15 LO, DBL-BAL	DC - 3	-7	40	17	Chip	EAR99	HMC129
4 - 8	+15 LO, DBL-BAL	DC - 3	-8	30	18	G8 Hermetic	EAR99	HMC129G8
4 - 8	+15 LO, DBL-BAL	DC - 3	-7	40	17	LC4	EAR99	HMC129LC4
5.5 - 14	+15 LO, DBL-BAL	DC - 6	-7	45	24	Chip	EAR99	HMC558
5.5 - 14	+15 LO, DBL-BAL	DC - 6	-7	45	24	LC3B	EAR99	HMC558LC3B
6 - 11	+15 LO, DBL-BAL	DC - 2	-7	40	17	Chip	EAR99	HMC130
6 - 15	+15 LO, DBL-BAL	DC - 2	-8.5	35	20	C8	EAR99	HMC141C8 / 142C8
6 - 18	+15 LO, DBL-BAL	DC - 6	-10	25	21	Chip	EAR99	HMC141 / 142
7 - 14	+15 LO, DBL-BAL	DC - 2	-10	35	20	LH5 Hermetic	EAR99	HMC141LH5
14 - 23	+15 LO, DBL-BAL	DC - 2	-10.5	38	18	Chip	EAR99	HMC203
3 - 10	+17 LO, DBL-BAL	DC - 4	-9	55	23	LC3B	EAR99	HMC787LC3B
5 - 20	+20 LO, DBL-BAL	DC - 3	-10	30	25	Chip	EAR99	HMC143 / 144
6 - 20	+20 LO, DBL-BAL	DC - 3	-10	35	23	LC4	EAR99	HMC144LC4
6 - 20	+20 LO, DBL-BAL	DC - 3	-10	35	24	LH5 Hermetic	EAR99	HMC144LH5

MIXERS

RF Frequency (GHz)	Function	IF Frequency (GHz)	Conversion Gain (dB)	LO / RF Isolation (dB)	IIP3 (dBm)	Package	ECCN Code	Part Number
Sub-Harmonic Mixers								
14 - 20	Sub-Harmonic	DC - 3	-10	40	7	LM3	EAR99	HMC258LM3
14 - 21	Sub-Harmonic	DC - 3	-10	40	7	Chip	EAR99	HMC258
14.5 - 19.5	Sub-Harmonic	DC - 3.5	-10	45	5	LC3B	EAR99	HMC258LC3B
17 - 25	Sub-Harmonic	DC - 3	-9	27	10	Chip	EAR99	HMC337
17.7 - 23.6	Sub-Harmonic, Upconverter	DC - 3.5	15	40	13	LC5	EAR99	HMC711LC5
20 - 30	Sub-Harmonic	DC - 4	-9	30	10	LM3	EAR99	HMC264LM3
20 - 31	Sub-Harmonic, Downconverter	0.7 - 3.0	3	28	8	LM3	EAR99	HMC265LM3
20 - 32	Sub-Harmonic	DC - 6	-10	40	13	Chip	EAR99	HMC264
20 - 32	Sub-Harmonic, Downconverter	0.7 - 3.0	3	30	10	Chip	EAR99	HMC265
20 - 40	Sub-Harmonic	1 - 3	-12	24	13	Chip	EAR99	HMC266
21 - 31	Sub-Harmonic	DC - 6	-9	40	13	LC3B	EAR99	HMC264LC3B
24 - 34	Sub-Harmonic	DC - 3	-11	33	13	LC3B	5A991.b	HMC338LC3B
24 - 34	Sub-Harmonic	DC - 4	-10	30	22	LC4	EAR99	HMC798LC4
26 - 33	Sub-Harmonic	DC - 2.5	-9	33	11	Chip	5A991.b	HMC338
33 - 42	Sub-Harmonic	DC - 3	-10	37	10	Chip	EAR99	HMC339

DEMODULATORS - I/Q Demodulator

Input Frequency (GHz)	Function	IF Frequency (GHz)	Conversion Gain (dB)	Noise Figure (dB)	IIP3 / IIP2 (dBm)	Package	ECCN Code	Part Number
0.1 - 4.0	I/Q Demodulator	DC - 0.6	-3.5	15	+25 / +60	LP4	EAR99	HMC597LP4E

MODULATORS - Bi-Phase Modulator

Input Frequency (GHz)	Function	Loss (dB)	Amp / Phase Balance (dB/Deg)	Carrier Suppression (dBc)	Bias Control (mA)	Package	ECCN Code	Part Number
1.8 - 5.2	Bi-Phase	8	0.2 / 2.5	30	+ / - 5	Chip	EAR99	HMC135
4 - 8	Bi-Phase	8	0.1 / 4.0	30	+ / - 5	Chip	EAR99	HMC136
6 - 11	Bi-Phase	9	0.25 / 10.0	20	+ / - 5	Chip	EAR99	HMC137

MODULATORS - Direct Quadrature Modulator

Input Freq. (GHz)	Function	OIP3 (dBm) / Carrier Suppression (dBc)	Modulation Bandwidth (MHz)	Output Noise Floor (dBc/Hz)	Bias Supply	Package	ECCN Code	Part Number
0.02 - 2.7	Direct Quadrature	23 / 42	DC - 700	-162	+5V @ 160 mA	LP4	EAR99	HMC696LP4E
0.05 - 2.8	Direct Quadrature with VGA	25 / 50	DC - 440	-159	+5V @ 120 mA	LP5	3A001.a.11.b	HMC795LP5E
0.1 - 4.0	Direct Quadrature	23 / 42	DC - 700	-159	+5V @ 170 mA	LP4	EAR99	HMC497LP4E
0.1 - 6.0	Direct Quadrature	30 / 40	DC - 700	-160	+5V @ 170 mA	LP4	EAR99	HMC1097LP4E
0.25 - 3.8	Direct Quadrature	14 / 38	DC - 250	-158	+3.3V @ 108 mA	LP3	EAR99	HMC495LP3E
0.45 - 4.0	Direct Quadrature	22 / 43	DC - 700	-165	+5V @ 168 mA	LP4	EAR99	HMC697LP4E
4 - 7	Direct Quadrature	17 / 34	DC - 250	-157	+3V @ 93 mA	LP3	EAR99	HMC496LP3E

MODULATORS - Vector Modulators

Frequency (GHz)	Function	Gain Range (dB)	Continuous Phase Control (deg)	IP3 / Noise Floor (Ratio)	IIP3 @ Max. Gain (dBm)	Package	ECCN Code	Part Number
0.7 - 1.0	Vector	-50 to -10	360	186.5	34	LP3	EAR99	HMC630LP3E
1.8 - 2.7	Vector	-50 to -10	360	186	35	LP3	EAR99	HMC631LP3E
1.8 - 2.2	Vector	-50 to -10	360	185	33	LP3	EAR99	HMC500LP3E

PASSIVES - Fixed Attenuators

Frequency (GHz)	Function	Attenuation Accuracy (dB)	Nominal Attenuation (dB)	Maximum Input Power (dBm)	Chip Size (Mils)	Package	ECCN Code	Part Number
DC - 50	Thru Line	±0.2	0.15	-	17 x 18	Chip	EAR99	HMC650
DC - 50	Thru Line	±0.3	0.15	-	23 x 18	Chip	EAR99	HMC651
DC - 50	Passive	±0.2	2	27	17 x 18	Chip	EAR99	HMC652
DC - 25	Passive	±0.5	2	27	-	LP2	EAR99	HMC652LP2E
DC - 50	Passive	±0.2	3	26	17 x 18	Chip	EAR99	HMC653
DC - 25	Passive	±0.5	3	26	-	LP2	EAR99	HMC653LP2E
DC - 50	Passive	±0.2	4	25	17 x 18	Chip	EAR99	HMC654
DC - 25	Passive	±0.5	4	25	-	LP2	EAR99	HMC654LP2E
DC - 50	Passive	±0.2	6	26	17 x 18	Chip	EAR99	HMC655
DC - 25	Passive	±0.5	6	26	-	LP2	EAR99	HMC655LP2E
DC - 50	Passive	±0.1	10	25	17 x 18	Chip	EAR99	HMC656
DC - 25	Passive	±1.5	10	25	N/A	LP2	EAR99	HMC656LP2E
DC - 50	Passive	±0.4	15	25	17 x 18	Chip	EAR99	HMC657

SMT & Chip (Die) Products

PASSIVES - Fixed Attenuators

Frequency (GHz)	Function	Attenuation Accuracy (dB)	Nominal Attenuation (dB)	Maximum Input Power (dBm)	Chip Size (Mils)	Package	ECCN Code	Part Number
DC - 25	Passive	±2	15	25	N/A	LP2	EAR99	HMC657LP2E
DC - 50	Passive	±0.5	20	25	23 x 18	Chip	EAR99	HMC658
DC - 25	Passive	±2	20	25	N/A	LP2	EAR99	HMC658LP2E

PHASE SHIFTERS - Analog

Frequency (GHz)	Function	Insertion Loss (dB)	Phase Range (deg)	2nd Harmonic Pin = -10 dBm (dBc)	Control Voltage Range (Vdc)	Package	ECCN Code	Part Number
1 - 2	Analog	3.5	400°	-40	0 to +13V	LP5	EAR99	HMC934LP5E
2 - 4	Analog	3.5	480° @ 2 GHz 450° @ 4 GHz	-40	0V to +13V	LP5	EAR99	HMC928LP5E
2 - 20	Analog	4	270° @ 2 GHz 180° @ 20 GHz	-45	0.5 to +11V	LP5	EAR99	HMC935LP5E
4 - 8	Analog	4	450° @ 4 GHz 430° @ 8 GHz	-40	0V to +13V	LP4	EAR99	HMC929LP4E
5 - 18	Analog	4	500° @ 5 GHz 100° @ 18 GHz	-80	0V to +10V	Chip	EAR99	HMC247
6 - 15	Analog	7	750° @ 6 GHz 500° @ 15 GHz	-40	0V to +5V	LP4	EAR99	HMC538LP4E
8 - 12	Analog	3.5	425° @ 8 GHz 405° @ 12 GHz	-35	0 to +13V	LP4	EAR99	HMC931LP4E
8 - 23	Analog	-	500°	-35	2.7 to 3.9V	LC3	3A001.a.11.b	HMC877LC3
12 - 18	Analog	4	405° @ 12 GHz 385° @ 18 GHz	-40	0 to +13V	LP4	EAR99	HMC932LP4E
18 - 24	Analog	4.5	495° @ 18 GHz 460° @ 24 GHz	-37	0 to +13V	LP4	EAR99	HMC933LP4E

PHASE SHIFTERS - Digital

Frequency (GHz)	Function	Insertion Loss (dB)	Phase Range (deg)	IIP3 (dBm)	Control Input (Vdc)	Package	ECCN Code	Part Number
8 - 12	-Bit Digital	5	22.5 to 360	40	0 / -3V	Chip	EAR99	HMC543
8 - 12	4-Bit Digital	6.5	22.5 to 360	37	0 / -3V	LC4B	EAR99	HMC543LC4B
15 - 18.5	5-Bit Digital	7	11.25 to 360	40	0 / -3	Chip	EAR99	HMC644
15 - 18.5	5-Bit Digital	7	11.25 to 360	40	0 / -3	LC5	EAR99	HMC644LC5
1.2 - 1.4	6-Bit Digital	4	5.625 to 360	45	0 / +5V	LP6	EAR99	HMC936LP6E
2.5 - 3.1	6-Bit Digital	4	5.625 to 360	54	0 / +5	Chip	EAR99	HMC647
2.5 - 3.1	6-Bit Digital	4	5.625 to 360	54	0 / +5	LP6	EAR99	HMC647LP6E
2.9 - 3.9	6-Bit Digital	4	5.625 to 360	45	0 / +5	Chip	EAR99	HMC648
2.9 - 3.9	6-Bit Digital	5	5.625 to 360	45	0 / +5	LP6	EAR99	HMC648LP6E
3 - 6	6-Bit Digital	6.5	5.625 to 360	44	0 / +5	Chip	EAR99	HMC649
3 - 6	6-Bit Digital	8	5.625 to 360	44	0 / +5	LP6	EAR99	HMC649LP6E
9 - 12	6-Bit Digital	6.5	5.625 to 360	38	0 / -3	Chip	EAR99	HMC643
9 - 12	6-Bit Digital	7	5.625 to 360	38	0 / -3	LC5	EAR99	HMC643LC5
9 - 12.5	6-Bit Digital	6.5	5.625 to 360	41	0 / +5	Chip	EAR99	HMC642
9 - 12.5	6-Bit Digital	7	5.625 to 360	41	0 / +5	LC5	EAR99	HMC642LC5

POWER DETECTORS - Log Detector/Controllers & RMS Detectors

Frequency (GHz)	Function	Dynamic Range (dB)	RSSI Slope (mV/dB)	RF Threshold Level (dBm)	Bias Supply	Package	ECCN Code	Part Number
50 Hz - 3.0	Log Detector / Controller	74 ±3	19	-66	+3.3V @ 29 mA	LP4	EAR99	HMC612LP4E
0.001 - 8.0	Log Detector / Controller	70 ±3	-25	-61	+5V @ 113 mA	LP4	EAR99	HMC602LP4E
0.001 - 10.0	Log Detector / Controller	73 ±3	-25	-65	+5V @ 103 mA	Chip	EAR99	HMC611
0.001 - 10.0	Log Detector / Controller	70 ±3	-25	-65	+5V @ 106 mA	LP4	EAR99	HMC611LP4E
0.01 - 4.0	Log Detector / Controller	70 ±3	19	-68	+3.3V @ 30 mA	LP4	EAR99	HMC601LP4E
0.05 - 4.0	Log Detector / Controller	70 ±3	19	-69	+3.3V @ 29 mA	LP4	EAR99	HMC600LP4E
0.05 - 8.0	Log Detector / Controller	54 ±1	17.5	-55	+5V @ 17 mA	LP3	EAR99	HMC713LP3E
0.1 - 2.7	Log Detector / Controller	54 ±1	17.5	-52	+5V @ 17 mA	MS8	EAR99	HMC713MS8E
8 - 30	Log Detector	54 ±3	13.3	-55	+3.3V @ 88 mA	LP3	EAR99	HMC662LP3E
1 - 23	mmW Power Detector	56 ±3	14.2	-52	+3.3V @ 91 mA	LP3	3A001.b.2.c	HMC948LP3E
DC - 3.9	RMS Power Detector	60 ±1	37	-69	+5V @ 50 mA	LP4	EAR99	HMC1010LP4E
DC - 3.9	RMS, Single-Ended	72 ±1	35	-68	+5V @ 55 mA	LP4	EAR99	HMC1020LP4E
DC - 3.9	RMS, Single-Ended with Envelope Tracker	70 ±1	35	-68	+5V @ 75 mA	LP4	EAR99	HMC1021LP4E
DC - 3.9	Dual RMS, Single-Ended	70 ±1	38.5	-66	+5V @ 143 mA	LP5	EAR99	HMC1030LP5E
DC - 5.8	RMS Power Detector	40 ±1	37	-69	+5V @ 42 mA	LP4	EAR99	HMC909LP4E

SDLVAs - Successive Detection Log Video Amplifiers

Frequency (GHz)	Function	Dynamic Range (dB)	RSSI Slope (mV/dB)	RF Threshold Level (dBm)	Bias Supply	Package	ECCN Code	Part Number
0.1 - 20	SDLVA	59	14	-54	+3.3V @ 83 mA	LC4B	EAR99	HMC613LC4B
0.5 - 18.5	SDLVA, Extended Range	67	15	-62	+3.3V @ 183 mA	LP4	EAR99	HMC1013LP4E
0.6 - 20	SDLVA	59	14	-54	+3.3V @ 80 mA	Chip	EAR99	HMC913
0.6 - 20	SDLVA	59	14	-54	+3.3V @ 80 mA	LC4B	EAR99	HMC913LC4B
1 - 20	SDLVA with Limited RF Output	55	15	-53	+3.3V @ 153 mA	LC4B	EAR99	HMC813LC4B
1 - 26	SDLVA with Limited RF Output	55	14.5	-53	+3.3V @ 150 mA	Chip	EAR99	HMC813

SWITCHES

Frequency (GHz)	Function	Insertion Loss (dB)	Isolation (dB)	Input P1dB (dBm)	Control Input (Vdc)	Package	ECCN Code	Part Number
-----------------	----------	---------------------	----------------	------------------	---------------------	---------	-----------	-------------

SPST & SPDT Switches

DC - 6	SPST, Failsafe	0.7	25	27	0 / +2.2 to +5V	SOT26	EAR99	HMC550E
DC - 6	SPST, High Isolation	1.4	52	27	0 / -5V	G7 Hermetic	EAR99	HMC231G7
DC - 2.5	SPDT, Reflective	0.4	36	29	0 / -5V	S8	EAR99	HMC239AS8E
DC - 3	SPDT, Reflective	0.4	27	30	0 / +3V	MS8	EAR99	HMC190AMS8E
DC - 3	SPDT, High Isolation	0.7	50	23	0 / +5V	MS8	EAR99	HMC194MS8E
DC - 3	SPDT, Reflective	0.4	28	30	0 / +3V	SOT26	EAR99	HMC197AE
DC - 3	SPDT, Reflective	0.4	28	30	0 / +3V	SOT26	EAR99	HMC221AE
DC - 3	SPDT, Reflective	0.3	31	34	0 / +3 to +8V	SOT26	EAR99	HMC545E
DC - 3.5	SPDT, High Isolation	0.5	45	25	0 / +5V	MS8G	EAR99	HMC284MS8GE
DC - 4	SPDT, Reflective	0.5	28	29	0 / -5V or +5V / 0	Chip	EAR99	HMC240A
DC - 4	SPDT, High Isolation	0.9	65	31	0 / +5V	LP4C	EAR99	HMC349LP4CE
DC - 4	SPDT, High Isolation	0.9	57	31	0 / +5V	MS8G	EAR99	HMC349MS8GE
DC - 4	SPDT, High Isolation	1.1	47	31	0 / +5V	MS8G	EAR99	HMC435MS8GE
DC - 4	SPDT, Differential	0.8	45	35	0 / +3V to	LP4	EAR99	HMC922LP4E
DC - 6	SPDT, High Isolation	1.4	50	26	0 / -5V	G7 Hermetic	EAR99	HMC232G7
DC - 6	SPDT, High Isolation	1.4	43	26	0 / -5V	G8 Hermetic	EAR99	HMC232G8
DC - 6	SPDT, High Isolation	1.4	43	26	0 / -5V	G8 Hermetic	EAR99	HMC233G8
DC - 6	SPDT, High Isolation	1.6	42	25	0 / +5V	MS8G	EAR99	HMC336MS8GE
DC - 6	SPDT, High Isolation	1.4	46	27	0 / -5V	G7 Hermetic	EAR99	HMC607G7
DC - 6	SPDT, High Isolation	0.8	60	35	0 / +3 to +5V	LP4C	EAR99	HMC849LP4CE
DC - 8	SPDT, High Isolation	1.4	50	26	0 / -5V	C8	EAR99	HMC232C8
DC - 8	SPDT, High Isolation	1.5	45	26	0 / -5V	C8	EAR99	HMC234C8
DC - 8	SPDT, High Isolation	1.2	48	23	0 / -5V	MS8G	EAR99	HMC270MS8GE
DC - 8	SPDT, High Isolation	2.0	44	23	0 / -5V	C8	EAR99	HMC347C8
DC - 8	SPDT, High Isolation	2.2	35	23	0 / -5V	G8 Hermetic	EAR99	HMC347G8
DC - 12	SPDT, High Isolation	1.5	55	27	0 / -5V	LP4	EAR99	HMC232LP4E
DC - 14	SPDT, High Isolation	1.7	44	23	0 / -5V	LP3	EAR99	HMC347LP3E
DC - 15	SPDT, High Isolation	1.4	50	26	0 / -5V	Chip	EAR99	HMC232
DC - 15	SPDT, High Isolation	1.7	60	26	0 / -5V	Chip	EAR99	HMC607
DC - 20	SPDT, High Isolation	1.7	45	23	0 / -5V	Chip	EAR99	HMC347
DC - 20	SPDT, High Isolation	1.8	47	23	0 / -5V	LP3	EAR99	HMC547LP3E
DC - 28	SPDT, High Isolation	1.8	47	23	0 / -5V	LC3	EAR99	HMC547LC3
0.1 - 50	SPDT, Reflective	1.9	31	25	0 / -3V	Chip	EAR99	HMC986
55 - 86	SPDT, PIN MMIC	2	30	-	-5 / +5	Chip	5A991.h	HMC-SDD112
0.1 - 2.1	SPDT, 40W, Failsafe	0.4	22	46	0 / +3V to +8V	LP2	EAR99	HMC646LP2E
0.2 - 2.2	SPDT, 10W, Failsafe	0.4	40	> 40	0 / +3 to +8V	MS8G	EAR99	HMC546MS8GE
0.2 - 2.7	SPDT, 10W, Failsafe	0.4	35	43	0 / +3 to +8V	LP2	EAR99	HMC546LP2E
0.824 - 0.894	SPDT, 10W, T/R	0.6	22	> 40	0 / +5V	SOT26	EAR99	HMC446E
DC - 2.5	SPDT, CATV	0.6	58	28	0 / +5V	LP3	EAR99	HMC348LP3E
DC - 3	SPDT T/R	0.5	25	39	0 / +3V to +8V	MS8	EAR99	HMC174MS8E
DC - 3	SPDT, 5W, T/R	0.3	30	39	0 / +3 to +10V	MS8	EAR99	HMC574MS8E
DC - 3	SPDT, 3W, T/R	0.3	30	37	0 / +3 to +10V	SOT26	EAR99	HMC595E
DC - 4	SPDT T/R	0.25	23	39	0 / +3 to +5V	SOT26	EAR99	HMC544E
DC - 4	SPDT, 10W, T/R	0.4	30	40	0 / +3 to +8V	MS8G	EAR99	HMC784MS8GE
DC - 6	SPDT T/R	0.5	27	37	0 / +3 to +5V	MS8G	EAR99	HMC536MS8GE
DC - 6	SPDT T/R	0.6	27	37	0 / +3 to +5V	LP2	EAR99	HMC536LP2E
5 - 6	SPDT T/R	1.2	31	33	TTL/CMOS	MS8	EAR99	HMC224MS8E

SMT & Chip (Die) Products

SWITCHES

Frequency (GHz)	Function	Insertion Loss (dB)	Isolation (dB)	Input P1dB (dBm)	Control Input (Vdc)	Package	ECCN Code	Part Number
Multi-Throw Switches								
DC - 3.5	SP3T	0.5	44	26	TTL/CMOS	QS16	EAR99	HMC245QS16E
DC - 2	SP4T	0.8	32	24	0 / -5V	S14	EAR99	HMC182S14E
DC - 3.5	SP4T	0.5	45	25	TTL/CMOS	QS16	EAR99	HMC241QS16E
DC - 4	SP4T	0.6	47	26	TTL/CMOS	LP3	EAR99	HMC241LP3E
DC - 4	SP4T	0.7	40	25	TTL/CMOS	G16 Hermetic	EAR99	HMC244G16
DC - 8	SP4T	1.8	42	21	0 / -5V	Chip	EAR99	HMC344
DC - 8	SP4T	2.0	45	26	0 / -5V	LC3	EAR99	HMC344LC3
DC - 8	SP4T	1.8	40	21	0 / -5V	LP3	EAR99	HMC344LP3E
DC - 8	SP4T	2.2	32	21	0 / 5V	LP3	EAR99	HMC345LP3E
DC - 12	SP4T	1.8	42	27	0 / -5V	LH5 Hermetic	EAR99	HMC344LH5
DC - 18	SP4T	2.1	42	24	0 / -5V	Chip	EAR99	HMC641
DC - 20	SP4T	2.1	42	23	0 / -5V	LC4	EAR99	HMC641LC4
DC - 20	SP4T	2.3	45	22	0 / -5V	LP4	EAR99	HMC641LP4E
23 - 30	SP4T	2.8	35	25	0 / -3V	LC4	EAR99	HMC944LC4
DC - 3	SP6T	0.8	41	24	TTL/CMOS	QS24	EAR99	HMC252QS24E
DC - 2	SP8T	1.3	30	20	0 / -5V	QS24	EAR99	HMC183QS24E
DC - 2.5	SP8T	1.1	36	23	TTL/CMOS	QS24	EAR99	HMC253QS24E
DC - 3.5	SP8T	1.2	36	24	TTL/CMOS	LC4	EAR99	HMC253LC4
DC - 8	SP8T	2.3	40	23	0 / 5V	LP4	EAR99	HMC321LP4E
DC - 8	SP8T	2.5	25	23	0 / -5V	LP4	EAR99	HMC322LP4E
DC - 10	SP8T	2	38	23	0 / -5V	Chip	EAR99	HMC322
Bypass, Diversity, Matrix & Transfer Switches								
DC - 2.5	Bypass DPDT	0.3	25	23	0 / +5V	MS8	EAR99	HMC199MS8E
5 - 6	DPDT, Diversity	1.2	20	30	0 / +5V	MS8G	EAR99	HMC393MS8GE
0.2 - 3.0	4x2 Matrix	6	44	26	0 / +5V	LP4	EAR99	HMC276LP4E
0.2 - 3.0	4x2 Matrix	6.5	43	22	0 / +3 to +5V	LP4	EAR99	HMC596LP4E
0.7 - 3.0	4x2 Matrix	5.8	33	26	0 / +5V	QS24	EAR99	HMC276QS24E
DC - 8	Transfer	1.2	42	26	0 / +5V	LP3	EAR99	HMC427LP3E

TRANSCEIVERS - New Product Line!


Frequency (GHz)	Function	P1dB (dBm) NF (dB)	Max Gain (dB)	Gain Adjust (dB)	Phase Noise @ 1 MHz Offset (dBc/Hz)	Power Dissipation (W)	Package	ECCN Code	Part Number
NEW! 57 - 64	60 GHz Integrated Transmitter	12 dBm	38	17	-86	0.8	Chip	5A991.b	HMC6000
NEW! 57 - 64	60 GHz Integrated Receiver	6 dB	67	65	-86	0.61	Chip	5A991.b	HMC6001

VARIABLE GAIN AMPLIFIERS

Frequency (GHz)	Function	Gain Control Range (dB)	NF * (dB)	OIP3 * (dBm)	P1dB (dBm)	Bias Supply	Package	ECCN Code	Part Number
0.5 - 6.0	Analog	-35 to 15	7.5	28	21	+5V @ 90 mA	LP5	EAR99	HMC972LP5E
2.3 - 2.5	Analog	-8 to 22	2.5	7	3	+3V @ 9 mA	MS8	EAR99	HMC287MS8E
5 - 12	Analog	22	2	34	23	+5V @ 120 mA	LP4	EAR99	HMC996LP4E
6 - 17	Analog	0 to 23	5	30	22	+5V @ 170 mA	Chip	EAR99	HMC694
6 - 17	Analog	0 to 23	6	30	22	+5V @ 175 mA	LP4	EAR99	HMC694LP4E
17 - 27	Analog	15	3.5	30	24	+5V @ 170 mA	LC4	EAR99	HMC997LC4
0.03 - 0.4	5-Bit digital, Differential Outputs	-4 to 19	5	40	25	+5V @ 240 mA	LP4	EAR99	HMC680LP4E
0.05 - 0.8	5-Bit Digital	-8 to 15	5	35	18	+5V @ 65 mA	LP4	EAR99	HMC628LP4E
0.07 - 4.0	6-Bit Digital, Serial & Parallel Control	-19.5 to 12	4	39	23	+5V @ 150 mA	LP5	EAR99	HMC742LP5E
0.5 - 4.0	6-Bit Digital, Serial & Parallel Control or Latched Parallel Control	-19 to 12.5	4	39	21.5	+5V @ 150 mA	LP5	EAR99	HMC742HFLP5E
0.7 - 1.2	6-Bit Digital, Serial & Parallel Control	-2.5 to 29	0.8	38.5	21	+5V @ 236 mA	LP5	EAR99	HMC707LP5E
0.7 - 2.7	6-Bit Digital	6.5 to 38	4.4	45	25	+5V @ 218 mA	LP5	EAR99	HMC926LP5E
DC - 1	6-Bit Digital, Serial & Parallel Control	-11.5 to 20	4.3	36	20	+5V @ 90 mA	LP5	EAR99	HMC627LP5E
DC - 1	6-Bit Digital, Parallel Control	8.5 to 40	2.8	36	20	+5V @ 176 mA	LP5	EAR99	HMC626LP5E
DC - 1	6-Bit Digital, Serial Control	13.5 to 45	2.7	36	20	+5V @ 176 mA	LP5	EAR99	HMC681LP5E
DC - 6	6-Bit Digital, Serial & Parallel Control	-13.5 to 18	6	33	19	+5V @ 88 mA	LP5	EAR99	HMC625LP5E
0.5 - 6.0	6-Bit Digital, Serial & Parallel Control	-13.5 to 18	6	33	19	+5V @ 88 mA	LP5	EAR99	HMC625HFLP5E
1.7 - 2.2	6-Bit Digital, Serial & Parallel Control	-2.5 to 29	1.0	37.5	21.5	+5V @ 252 mA	LP5	EAR99	HMC708LP5E
DC - 4	Dual 6-Bit Digital, Serial Control	-45 to 18	6	33	18	+5V @ 82 mA	LP6C	EAR99	HMC743LP6CE

* Maximum Gain State


24 GHz FMCW AUTOMOTIVE SENSOR

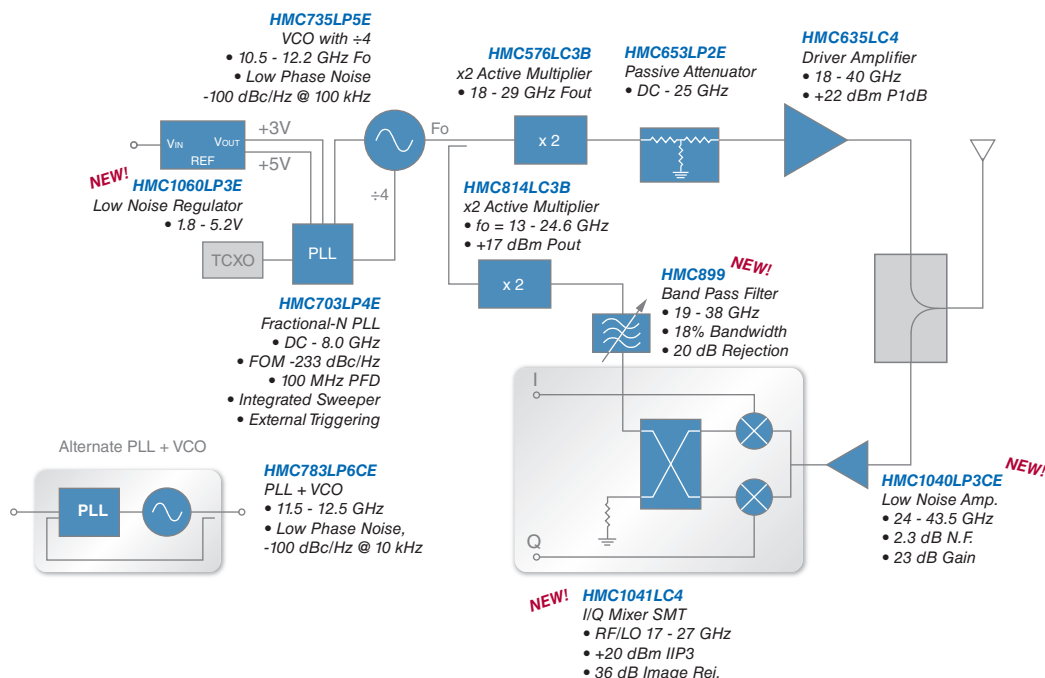

Typical Automotive application is illustrated.

See the full product listing for alternatives to the HMC products shown in each functional block.

GPS, SDARS & DSRC RF FRONT-END FOR TELEMATICS

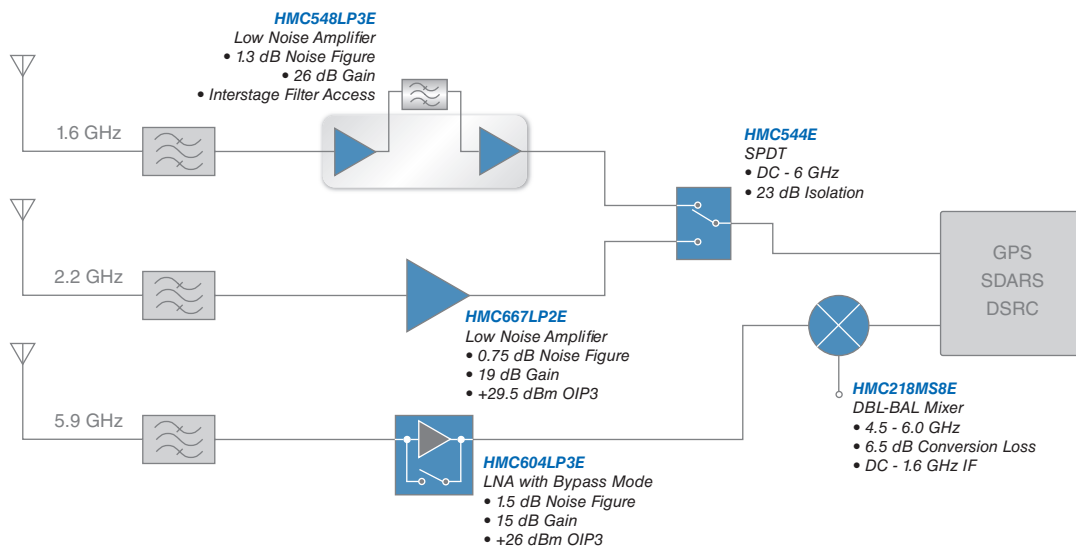

Typical Automotive application is illustrated.


See the full product listing for alternatives to the select HMC products shown in each functional block.

MARKET & APPLICATION GUIDE

Broadband, DC - 11 GHz


CABLE MODEM, CATV, DBS & VoIP SOLUTIONS, 5 - 2150 MHz

Cable Modem Termination System (CMTS)

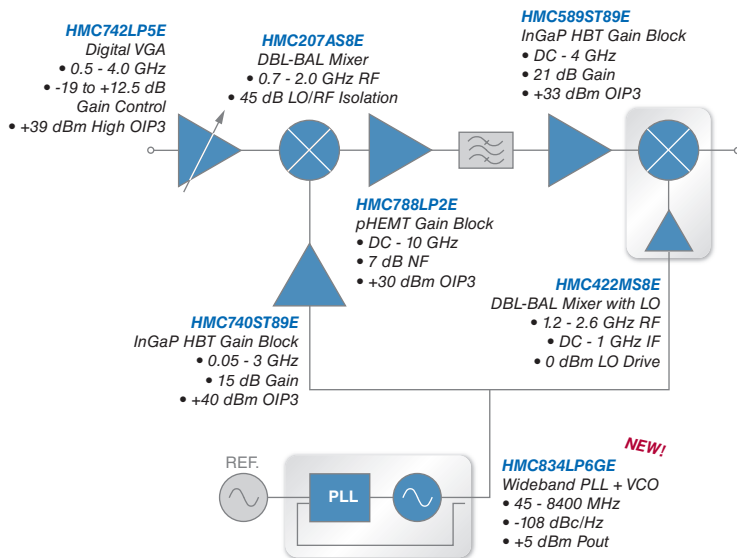


A Selection of SPNT Switches for CATV Filter & Signal Routing

Part Number	Frequency (GHz)	Function	1 GHz Loss / Isolation (dB)
HMC348LP3E	DC - 2.5	SPDT, 75 Ω	0.6 / 58
HMC349LP4CE	DC - 4	SPDT	0.9 / 65
HMC347LP3E	DC - 14	SPDT	1.7 / 44
HMC245QS16E	DC - 3.5	SP3T	0.5 / 44
HMC345LP3E	DC - 8	SP4T	2.2 / 32
HMC252QS24E	DC - 3	SP6T	2.0 / >45
HMC321LP4E	DC - 8	SP8T	2.0 / >45

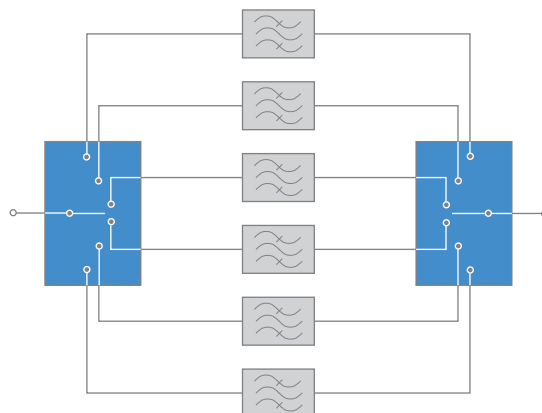

Typical Broadband applications are illustrated. See the full product listing for alternatives to the select HMC products shown in each functional block.

WiMAX & FIXED WIRELESS, 2 - 6 GHz

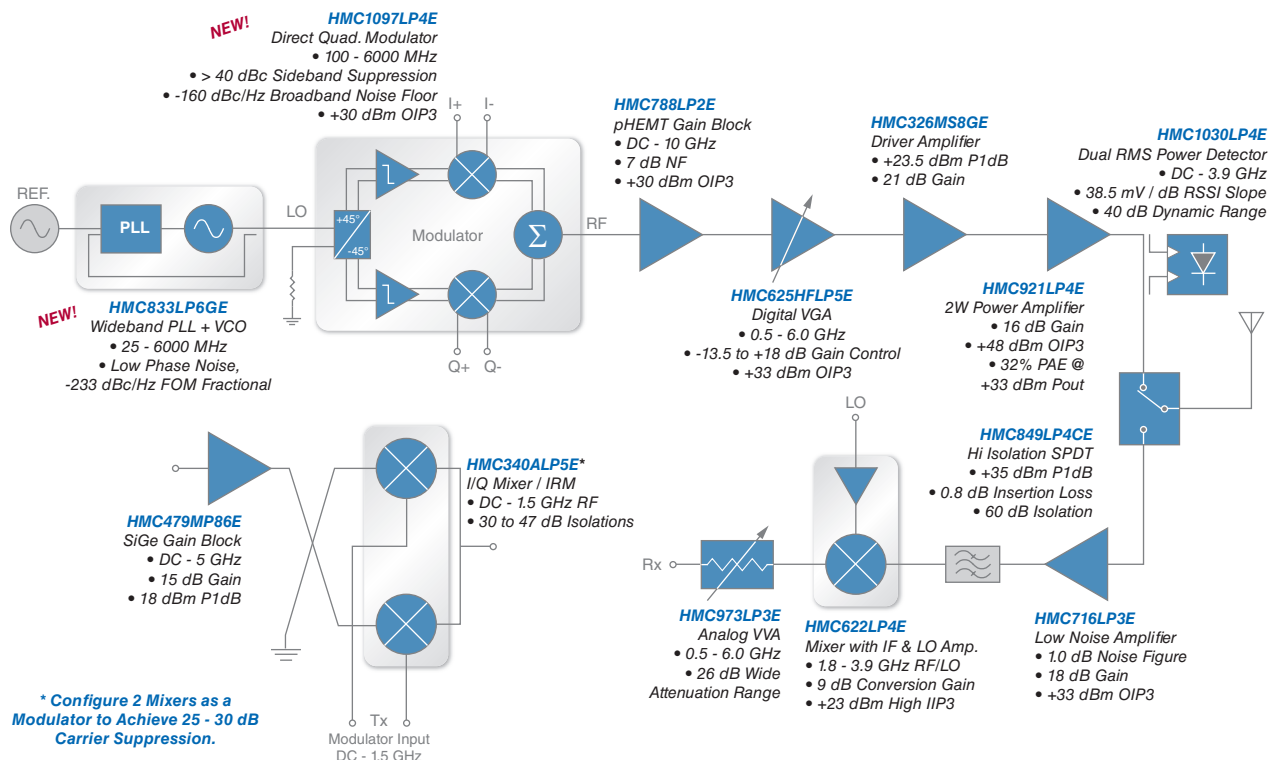


Typical WiMAX / FWA Transceiver is illustrated. See the full product listing for alternatives to the select HMC products shown in each functional block.


MARKET & APPLICATION GUIDE

Cellular Infrastructure, 380 - 2690 MHz

WiMAX / LTE / 4G TRANSMITTER SOLUTIONS

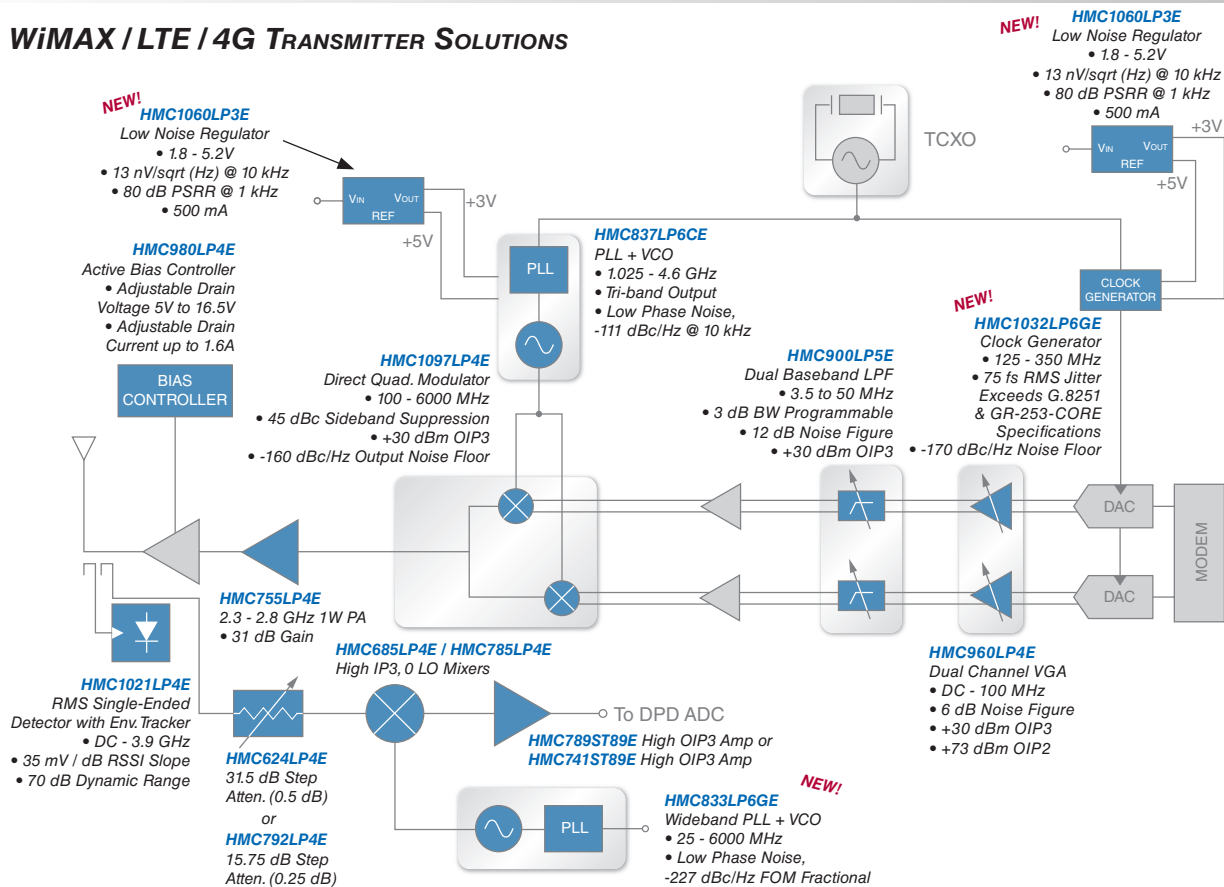


WiMAX / LTE / 4G RECEIVER SOLUTIONS FEATURING HETERODYNE DOWNCONVERSION

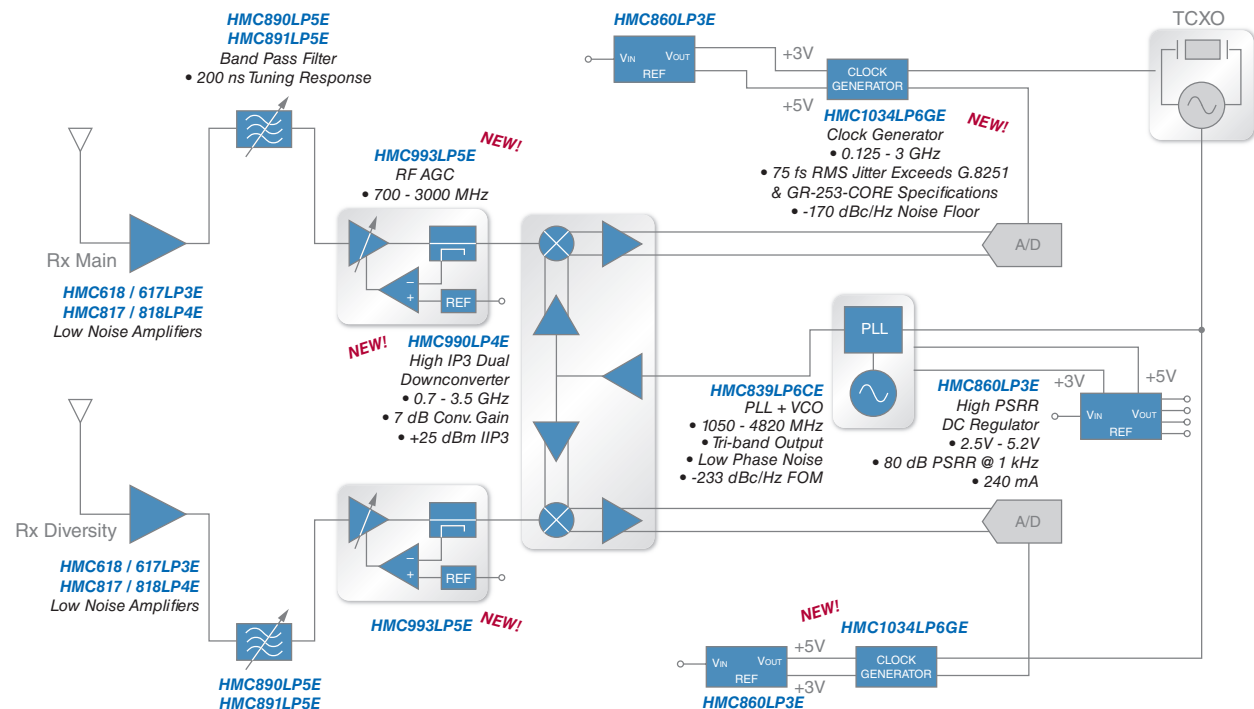

Typical WiMAX/LTE/4G applications are illustrated.
See the full product listing for alternatives to the select HMC products shown in each functional block.


Microwave & mmWave Communications, Test & Measurement & Sensors, 2 - 86 GHz

DOUBLE UPCONVERSION & DIRECT DOWNCONVERSION

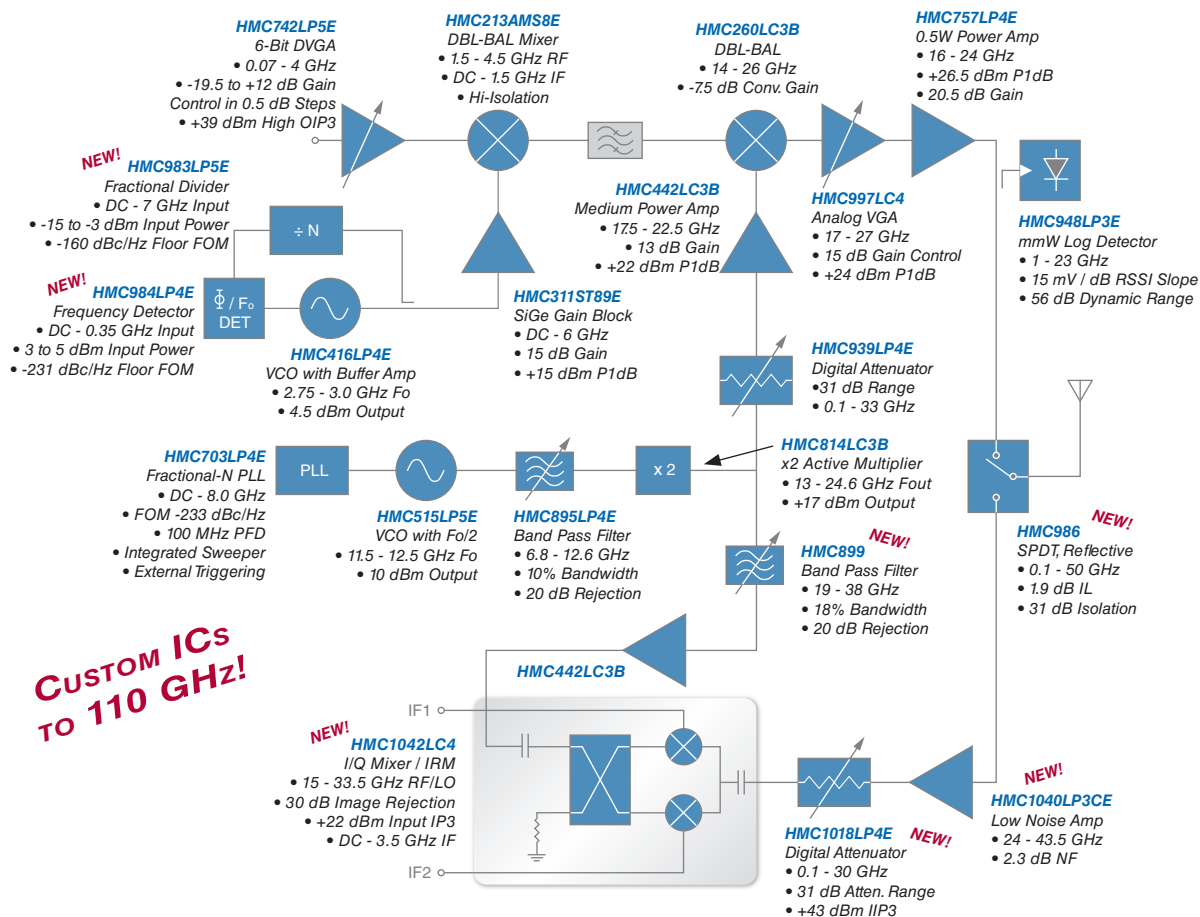


HITTITE'S HIGH FREQUENCY LO SOURCE ALTERNATIVES

PLL & VCO CHIPSET

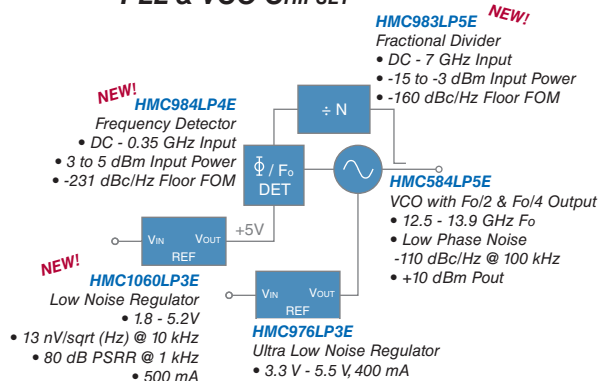

PLL WITH INTEGRATED VCO IC

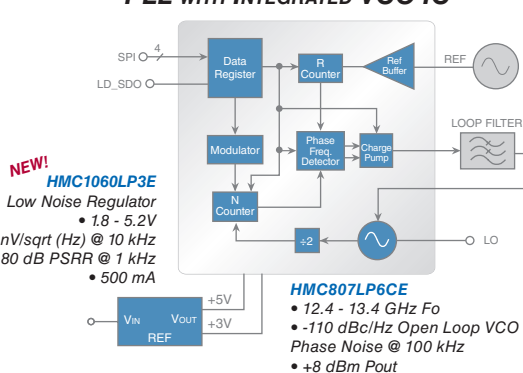


Typical Microwave / Millimeterwave application is illustrated.
See the full product listing for alternatives to the select HMC products shown in each functional block.

Microwave & mmWave Communications, Test & Measurement & Sensors, 2 - 86 GHz


CHIPSETS FOR 6 TO 42 GHz MICROWAVE RADIO BACKHAUL

Features

- ◆ **Integrated IQ TX Upconverter IC with a X2 LO Buffer & a High Linearity Driver Amplifier**
- ◆ **High Linearity 17 - 24 GHz Power Amplifier with 40 dBm OIP3 & 32 dBm Saturated Power**
- ◆ **Low Noise Image Rejection Downconverter IC with a X2 Integrated LO Buffer**
- ◆ **Very Low Phase Noise PLL IC with an Integrated VCO**

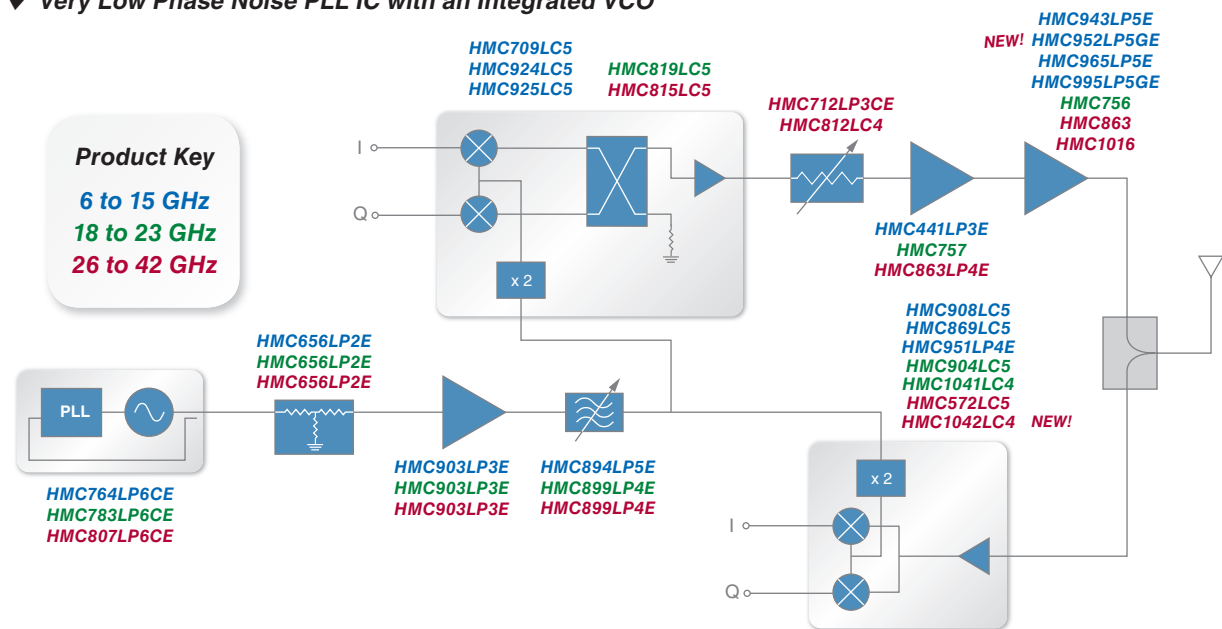

70 / 80 GHz E-BAND RADIO CHIPSET

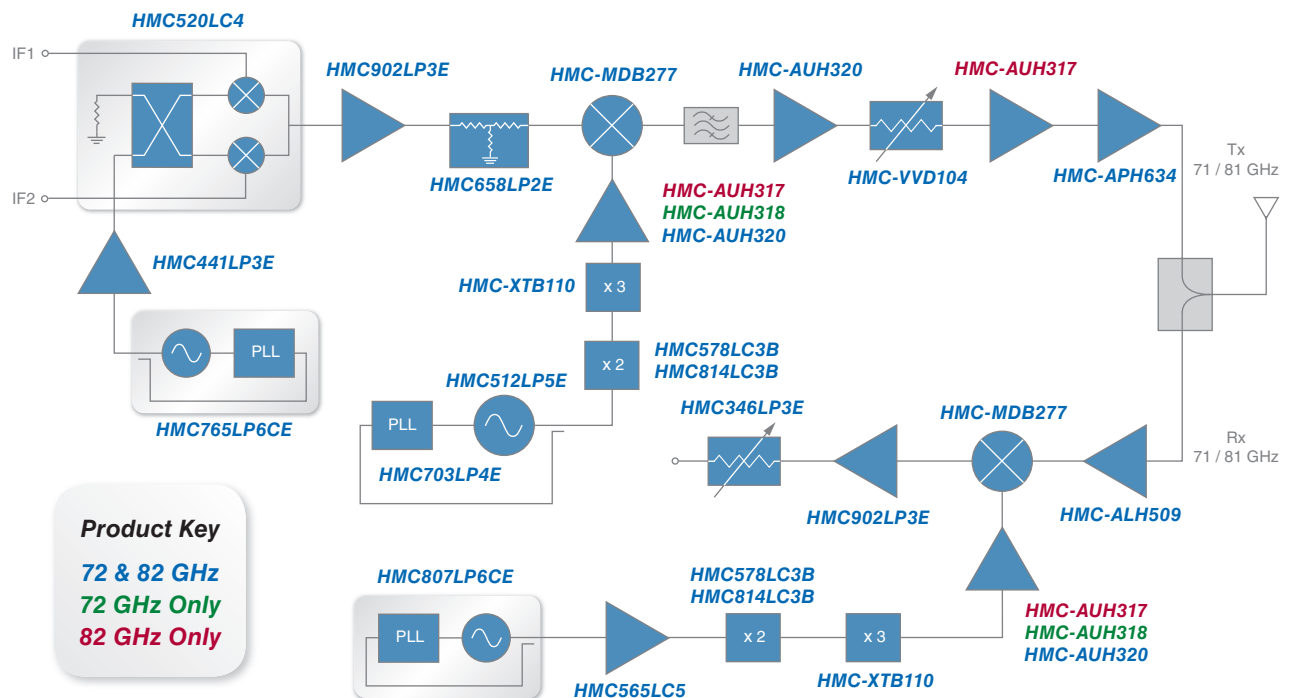

*Typical Microwave / Millimeterwave application is illustrated.
See the full product listing for alternatives to the select HMC products shown in each functional block.*

HMC5850BG 40 / 100G Optical Modulator Driver


NEW!




Features

- ◆ Operational to 32 Gbps:
 - 40 Gbps DQPSK
 - 100 Gbps DP-QPSK (Coherent)
 - 40 Gbps DP-BPSK
- ◆ Low DC Power Dissipation:
 - 1.4W (for 8 Vpp Swing @ 6V Supply)
 - 0.8W (for 6 Vpp Swing @ 5V Supply)
- ◆ Small Package Size: 9.75 x 6 x 3.29 mm
- ◆ Integrated Peak Detect Feature Enables Monitoring & Maintaining Output Swing Stability
- ◆ Integrated Bias-Tee Feature Eliminates External Coil, Simplifies PCB Design & Lowers BOM Cost

21.5 Gbps NRZ Output Eye Diagram @ +6V

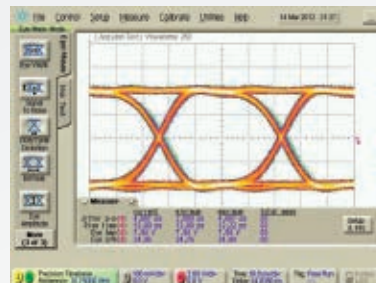

32 Gbps NRZ Output Eye Diagram @ +6V

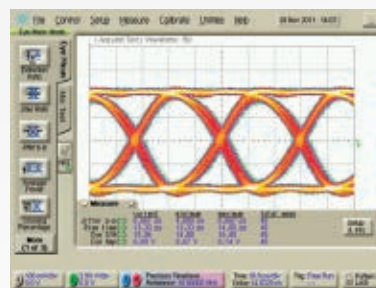

Low Power 40G / 100G Optical Modulator Driver for Long-Haul Applications!
Features Integrated Bias-Tee and Peak Detection Feature!

HMCAD1104 Octal 10-Bit 20/40/50/65 MSPS Analog-to-Digital Converter


NEW!




Features

- ◆ 50 MSPS Maximum Sampling Rate
- ◆ Ultra Low Power Dissipation
 - 12 mW / Channel @ 20 MSPS
 - 20 mW / Channel @ 40 MSPS
 - 25 mW / Channel @ 50 MSPS
 - 30 mW / Channel @ 65 MSPS
- ◆ 61 dB SNR @ 8 MHz Fin
- ◆ Coarse and Fine Gain Control
- ◆ 64 Lead 9 x 9 mm SMT Package

Power Dissipation Per Channel

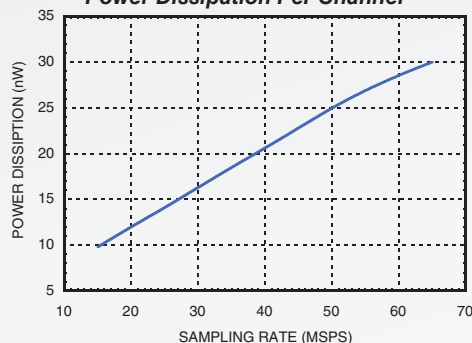

Performance

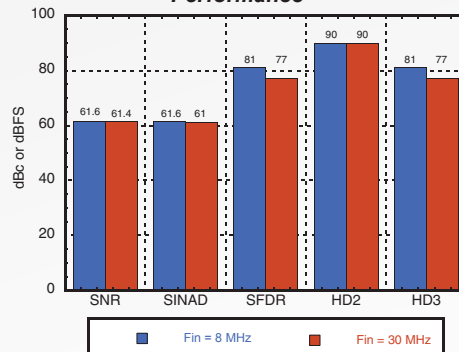

Ideal for ATE, MIMO Antennas & High Speed Data Acquisition!

SMT & Chip (Die) Products

BROADBAND TIME DELAYS - Analog & Digital

Data / Clock Rate (Gbps / GHz)	Function	Rise / Fall (ps)	Deterministic Jitter (ps)	Differential Output Voltage Swing (Vp-p)	DC Power Consumption (mW)	Vcc Power Supply (Vdc)	Package	ECCN Code	Part Number
- / 23	Analog Time Delay	10 / 11	-	0.5 - 0.95	630	+3.3	LC3	3A001.a.11.b	HMC877LC3
32 / 24	Analog Time Delay	14 / 14	6	0.15 - 0.6	1450	+3.3	LC4B	3A001.a.11.b	HMC910LC4B
32 / 24	Analog Time Delay	15 / 14	6	0.8	1600	+3.3	LC4	3A001.a.11.b	HMC911LC4B
28 / 28	5-Bit Digital Time Delay	20 / 18	< 2	0.5 - 1.35	610	-3.3	LC5	3A001.a.11.b	HMC856LC5

COMPARATORS - High Speed Clocked, Latched & Window Comparators

Analog Input B/W (GHz) / Clock Rate (Gbps)	Function	Deterministic Jitter (ps)	Propagation Delay (ps)	Output Voltage Swing (Vdc)	DC Power (mW)	Vcco / Vterm ^[1] Power Supply (Vdc)	Package	ECCN Code	Part Number
10 / 20	Clocked Comparator-RSPECL	<3	120	0.4	150	+3.3 / +1.3	LC3C	3A001.a.11.b	HMC874LC3C
10 / 20	Clocked Comparator-RSCML	<3	120	0.4	130	0 / 0	LC3C	3A001.a.11.b	HMC875LC3C
10 / 20	Clocked Comparator-RSECL	<3	120	0.4	150	0 / -2.0	LC3C	3A001.a.11.b	HMC876LC3C
10 / [2]	Latched Comparator-RSPECL	2	85	0.4	140	+3.3 / 1.3	LC3C	3A001.a.11.b	HMC674LC3C
10 / [2]	Latched Comparator-RSPECL	2	85	0.4	140	+3.3 / 1.3	LP3	3A001.a.11.b	HMC674LP3E
10 / [2]	Latched Comparator-RSCML	2	100	0.4	100	0 / 0	LC3C	3A001.a.11.b	HMC675LC3C
10 / [2]	Latched Comparator-RSCML	2	100	0.4	100	0 / 0	LP3	3A001.a.11.b	HMC675LP3E
10 / [2]	Latched Comparator-RSECL	2	100	0.35	120	0 / -2.0	LC3C	3A001.a.11.b	HMC676LC3C
10 / [2]	Latched Comparator-RSECL	2	100	0.35	120	0 / -2.0	LP3	3A001.a.11.b	HMC676LP3E
10 / -	Window Comparator	2	88	0.4	240	+2 / 0	LC3C	3A001.a.11.b	HMC974LC3C

[1] Vee = -3.0V & Vcci = +3.3V [2] These products are pin for pin compatible

CROSSPOINT SWITCH

Data / Clock Rate (Gbps / GHz)	Function	Rise / Fall Time (ps)	Deterministic Jitter (ps)	Differential Output Swing (Vp-p)	DC Power (mW)	DC Power Supply (Vdc)	Package	ECCN Code	Part Number
14 / 14	2x2 Crosspoint Switch*	21 / 21	2	0.5 - 1.2	345	-3.3	LC5	3A001.a.11.b	HMC857LC5

DATA CONVERTERS

Low Power Analog-to-Digital Converters

Sample Rate	Function / Mode	Resolution (bits)	# of Channels	Power Dissipation [2][3]	SNR (dBFS)	SFDR (dBc)	Package	ECCN Code	Part Number
640 MSPS	High Speed, Single Channel	12	1	490 mW	70	60 / 75 [1]	LP7DE	3A001.a.5.a.4	HMCAD1520
320 MSPS	High Speed, Dual Channel	12	2	490 mW	70	60 / 78 [1]		3A001.a.5.a.4	
160 MSPS	High Speed, Quad Channel	12	4	490 mW	70	60 / 78 [1]		3A001.a.5.a.4	
105 MSPS 80 MSPS	Precision, Quad Channel	14	4 4	603 mW 530 mW	74 75	83 85		3A001.a.5.a.4	
1 GSPS	High Speed, Single Channel	8	1	710 mW	49.8	49 / 64 [1]	LP7DE	3A001.a.5.a.1	HMCAD1511
500 MSPS	High Speed, Dual Channel	8	2	710 mW	49.8	44 / 63 [1]		3A001.a.5.a.1	
250 MSPS	High Speed, Quad Channel	8	4	710 mW	49.8	57 / 70 [1]		3A001.a.5.a.1	
500 MSPS	High Speed, Single Channel	8	1	295 mW	49.8	49 / 65 [1]	LP7DE	3A991.c.1	HMCAD1510
250 MSPS	High Speed, Dual Channel	8	2	295 mW	49.8	59 / 69 [1]		3A991.c.1	
125 MSPS	High Speed, Quad Channel	8	4	295 mW	49.7	60 / 69 [1]		3A991.c.1	
80 MSPS	Octal Channel	13 / 12	8	59 mW / Channel	70.1	77	LP9E	3A991.c.3	HMCAD1102
65 MSPS	Octal Channel	13 / 12	8	51 mW / Channel	72.2	82	LP9E	3A991.c.3	HMCAD1101
NEW! 20/40/50/65 MSPS	Octal Channel	10	8	12/20/25/30 mW / Channel	61.6	81	LP9E	EAR99	HMCAD1104
50 MSPS	Octal Channel	13 / 12	8	41 mW / Channel	72.2	82	LP9E	3A991.c.3	HMCAD1100
40 MSPS	Octal Channel	13 / 12	8	35 mW / Channel	72.2	82		3A991.c.3	
20 MSPS	Octal Channel	13 / 12	8	23 mW / Channel	72.2	82		3A991.c.3	
80 MSPS	Dual Channel	13 / 12	2	102 mW	72	77	LP9E	3A991.c.3	HMCAD1050-80
65 MSPS	Dual Channel	13 / 12	2	85 mW	72.6	81		3A991.c.3	
40 MSPS	Dual Channel	13 / 12	2	55 mW	72.7	81	LP9E	3A991.c.3	HMCAD1050-40
20 MSPS	Dual Channel	13 / 12	2	30 mW	72.2	85		3A991.c.3	

DATA CONVERTERS

Low Power Analog-to-Digital Converters

Sample Rate	Function / Mode	Resolution (bits)	# of Channels	Power Dissipation [2][3]	SNR (dBFS)	SFDR (dBc)	Package	ECCN Code	Part Number
80 MSPS	Single Channel	13 / 12	1	60 mW	72	77	LP6HE	3A991.c.3	HMCAD1051-80
65 MSPS	Single Channel	13 / 12	1	50 mW	72.6	81		3A991.c.3	
40 MSPS	Single Channel	13 / 12	1	33 mW	72.7	81	LP6HE	3A991.c.3	HMCAD1051-40
20 MSPS	Single Channel	13 / 12	1	19 mW	72.2	85		3A991.c.3	
80 MSPS	Dual Channel	10	2	78 mW	61.6	75	LP9E	EAR99	HMCAD1040-80
65 MSPS	Dual Channel	10	2	65 mW	61.6	77		EAR99	
40 MSPS	Dual Channel	10	2	43 mW	61.6	81	LP9E	EAR99	HMCAD1040-40
20 MSPS	Dual Channel	10	2	24 mW	61.6	81		EAR99	
80 MSPS	Single Channel	10	1	46 mW	61.6	75	LP6HE	EAR99	HMCAD1041-80
65 MSPS	Single Channel	10	1	38 mW	61.6	77		EAR99	
40 MSPS	Single Channel	10	1	25 mW	61.6	81	LP6HE	EAR99	HMCAD1041-40
20 MSPS	Single Channel	10	1	15 mW	61.6	81		EAR99	

[1] Excluding Interleaving Spurs.

Ultra High Speed Analog-to-Digital Converters

Input Frequency (GHz)	Function	Sample Rate (Gsp/s)	Resolution (Bits)	ENOB	SFDR (dBFS)	Package	ECCN Code	Part Number
NEW! 20	3-Bit ADC with 1:2 Demux	26	3	2.9	26	LP9	3A001.a.11.b	HMCAD5831LP9BE

Track-and-Hold Amplifiers

Input Frequency (GHz)	Function	Single Tone THD/SFDR (dB)	Maximum Clock Rate (GS/s)	Output Noise (mV RMS)	Hold Mode Feed-through Rejection (dB)	Package	ECCN Code	Part Number
NEW! DC - 5	Track-and-Hold	-65 / 67	4.0	0.86	> 60	LC4B	3A001.a.11.b	HMC760LC4B
NEW! DC - 18	Track-and-Hold	-65 / 67	4.0	1.65	> 60	LC4B	3A001.a.11.b	HMC661LC4B
0.02 - 4.5	Track-and-Hold	-66 / 67	3.0	0.95	> 60	LC4B	3A001.a.11.b	HMC660LC4B

DC POWER CONDITIONING - Linear Voltage Regulators

Input Voltage (V)	Function	Output Voltage (V)	Output Current (mA)	Power Supply Rejection Ratio (PSRR) (dB)		Output Noise Spectral Density (nV/√Hz)		Regulated Outputs	Package	ECCN Code	Part Number
				1 kHz	1 MHz	1 kHz	10 kHz				
3.35 - 5.6	Quad High PSRR	2.5 - 5.2	15 - 100	80	60	7	3	4	LP3	EAR99	HMC860LP3E
3.35 - 5.6	Low Noise, High PSRR	1.8 - 5.2	500	80	60	7	3	4	LP3	EAR99	HMC1060LP3E
4.8 to 5.6	Low Noise, High PSRR	1.8 to 5.1	400	60	30	6	3	1	LP3	EAR99	HMC976LP3E

DC POWER MANAGEMENT - Active Bias Controller

Supply Voltage Range (V)	Function	VDRAIN Voltage Range (V)	IDRAIN Bias Current (mA)	IGATE Drive Current (mA)	VGATE Voltage Range (V)	Over / Under IDRAIN Current Alarm	Low VDD Alarm	Package	ECCN Code	Part Number
4 to 12	Active Bias Controller	4 to 12	20 to 200	-0.8 to 0.8	-2.5 to 2.0	-	-	Chip	EAR99	HMC981
4 to 12	Active Bias Controller	4 to 12	0 to 200	-0.8 to 0.8	-2.5 to 2.5	-	-	LP3	EAR99	HMC981LP3E
5 to 16.5	Active Bias Controller	3 to 15	0 to 500	-4 to 4	-2.5 to 2.5	Yes	Yes	LP5	EAR99	HMC920LP5E
NEW! 5 - 16.5	Active Bias Controller	5 - 16.5	50 - 1600	-4 to 4	-2.46 to +2.04	Yes	-	Chip	EAR99	HMC980
5 to 16.5	Active Bias Controller	5 to 16.5	50 to 1600	-4 to 4	-2.46 to +2.04	Yes	-	LP4	EAR99	HMC980LP4E

HIGH SPEED DIGITAL LOGIC

Data / Clock Rate (Gbps / GHz)	Function	Rise / Fall Time (ps)	Deterministic Jitter (ps)	Differential Output Swing (Vp-p)	DC Power (mW)	DC Power Supply (Vdc)	Package	ECCN Code	Part Number
--------------------------------	----------	-----------------------	---------------------------	----------------------------------	---------------	-----------------------	---------	-----------	-------------

1:2 & 1:4 Fanout Buffers

13 / 13	Fast Rise Time 1:2 Fanout Buffer*	19 / 18	2	0.6 - 1.1	300	-3.3	LP3	3A001.a.11.b	HMC720LP3E
13 / 13	Fast Rise Time 1:2 Fanout Buffer	19 / 18	2	1.1	300	-3.3	LC3C	3A001.a.11.b	HMC724LC3C
13 / 13	Fast Rise Time 1:2 Fanout Buffer*	22 / 20	2	0.6 - 1.2	290	+3.3	LC3C	3A001.a.11.b	HMC744LC3C
28 / 20	1:2 Fanout Buffer*	16 / 15	2	0.6 - 1.1	315	-3.3	LC3C	3A001.a.11.b	HMC850LC3C
45 / 28	1:2 Fanout Buffer*	11 / 11	3	0.4 - 1.2	465	-3.3	LC4B	3A001.a.11.b	HMC842LC4B
13 / 13	1:4 Fanout Buffer*	26 / 25	4	0.6 - 1.4	440	-3.3	LC4B	3A001.a.11.b	HMC940LC4B

SMT & Chip (Die) Products

HIGH SPEED DIGITAL LOGIC

Data / Clock Rate (Gbps / GHz)	Function	Rise / Fall Time (ps)	Deterministic Jitter (ps)	Differential Output Swing (Vp-p)	DC Power (mW)	DC Power Supply (Vdc)	Package	ECCN Code	Part Number
2:1 Selectors									
14 / 14	2:1 Differential Selector*	19 / 20	2	0.5 - 1.3	221	-3.3	LC4B	3A001.a.11.b	HMC858LC4B
13 / 13	2:1 Selector*	22 / 22	2	0.6 - 1.2	250	+3.3	LC3C	3A001.a.11.b	HMC748LC3C
14 / 14	4:1 Selector*	17 / 17	2	0.5 - 1.3	294	-3.3	LC5	3A001.a.11.b	HMC958LC5
AND / NAND / OR / NORs									
13 / 13	Fast Rise Time AND / NAND / OR / NOR*	19 / 18	2	0.6 - 1.1	230	-3.3	LP3	3A001.a.11.b	HMC722LP3E
13 / 13	Fast Rise Time AND / NAND / OR / NOR	19 / 18	2	1.1	230	-3.3	LC3C	3A001.a.11.b	HMC726LC3C
13 / 13	Fast Rise Time AND / NAND / OR / NOR*	22 / 21	2	0.6 - 1.2	230	+3.3	LC3C	3A001.a.11.b	HMC746LC3C
28 / 28	AND / NAND / OR / NOR*	15 / 14	2	0.6 - 1.5	241	-3.3	LC3C	3A001.a.11.b	HMC852LC3C
45 / 25	AND / NAND / OR / NOR*	10 / 10	2	0.2 - 0.9	530	-3.3	LC4B	3A001.a.11.b	HMC843LC4B
Clock Dividers									
- / 26	Clock Divide-by-4*	19 / 19	-	0.8 - 1.8	281	-3.3	LC3	3A001.a.11.b	HMC959LC3
- / 26	Clock Divide-by-8*	19 / 17	-	0.8 - 1.8	520	-3.3	LC3	3A001.a.11.b	HMC859LC3
D-Type Flip-Flops									
14 / 14	Dual D-Type Flip-Flop with Common Clock*	22 / 20	2	0.6 - 1.3	442	-3.3	LC4B	3A001.a.11.b	HMC953LC4B
13 / 13	Fast Rise Time D-Type Flip-Flop*	19 / 17	2	0.7 - 1.3	260	-3.3	LC3C	3A001.a.11.b	HMC723LP3E
13 / 13	Fast Rise Time D-Type Flip-Flop	19 / 17	2	1.1	260	-3.3	LC3C	3A001.a.11.b	HMC727LC3C
13 / 13	Fast Rise Time D-Type Flip-Flop*	22 / 20	2	0.7 - 1.2	264	+3.3	LC3C	3A001.a.11.b	HMC747LC3C
28 / 28	D-Type Flip-Flop*	15 / 14	2	0.7 - 1.3	260	-3.3	LC3C	3A001.a.11.b	HMC853LC3C
43 / 43	D-Type Flip-Flop*	12 / 12	2	0.2 - 0.85	630	-3.3	LC4B	3A001.a.11.b	HMC841LC4B
NRZ-to-RZ Converters									
13 / 13	NRZ-to-RZ Converter	15 / 13	2	0.3 - 1.2	594	+3.3	LC3C	3A001.a.11.b	HMC706LC3C
T Flip-Flops									
26 / 26	T Flip-Flop w/ Reset*	18 / 17	2	0.6 - 1.2	270	+3.3	LC3C	3A001.a.11.b	HMC749LC3C
XOR / XNORs									
13 / 13	Fast Rise Time XOR / XNOR*	19 / 18	2	0.6 - 1.2	230	-3.3	LP3	3A001.a.11.b	HMC721LP3E
13 / 13	Fast Rise Time XOR / XNOR	19 / 18	2	1.1	230	-3.3	LC3C	3A001.a.11.b	HMC725LC3C
13 / 13	Fast Rise Time XOR / XNOR*	21 / 19	2	0.6 - 1.2	240	+3.3	LC3C	3A001.a.11.b	HMC745LC3
28 / 28	XOR / XNOR*	15 / 14	2	0.6 - 1.4	241	-3.3	LC3C	3A001.a.11.b	HMC851LC3C
45 / 28	XOR / XNOR*	11 / 10	3	0.2 - 8.5	512	-3.3	LC4B	3A001.a.11.b	HMC844LC4B

* These products feature programmable output voltage swing.

1:9 Fanout Buffer

Clock Rate (GHz)	Function	Input	Output	Phase Jitter (12 k to 20 MHz)	Rise/Fall Time (ps)	Channel Skew (ps)	Disable Mode	Power Supply (V)	Package	ECCN Code	Part Number
DC - 8	1:9 Fanout Buffer	LVPECL, LVDS, CML, CMOS	LVPECL	8 fs RMS	65	3.1	Yes	3.3	LP5	3A001.a.11.b	HMC987LP5E

IF / BASEBAND PROCESSING - Dual Baseband Low Pass Filter & Dual Baseband Digital VGA

Dual Baseband Low Pass Filter

3 dB Bandwidth Setting (MHz)	Function	3 dB Bandwidth Accuracy (%)	Gain (dB)	NF (dB)	OIP3 (dBm)	Package	ECCN Code	Part Number
3.5 - 50	Dual Low Pass with ADC Driver	±2.5	0 / 10	12	30	LP5	EAR99	HMC900LP5E

Dual Baseband Digital VGA

Frequency (MHz)	Function	NF (dB)	Variable Gain (dB)	OIP3 (dBm)	OIP2 (dBm)	Sideband Supp. (dB)	Magnitude (dB) / Phase (deg) Balance	Bias Supply	Package	ECCN Code	Part Number
DC - 100	Digital, Serial & Parallel Control	6	0 to 40	+30	+65	55	±0.1 / ±1	+5V @ 70 mA	LP4	EAR99	HMC960LP4E

INTERFACE - RF Switch, Attenuator & Phase Shifter Digital Drivers

Bit Rate (Mbps)	Function	Input	Output Voltage (V)	Output Current (mA)	Bias Supply	Package	ECCN Code	Part Number
10	6-Bit Switch Driver / Controller	TTL/CMOS	-5 / +2.2	1	+5V @ 1.5 mA	LP5	EAR99	HMC677LP5E
10	6-Bit Switch Driver / Controller	TTL/CMOS	-5 / +2.2	1	+5V @ 1 mA	G32	EAR99	HMC677G32

LIMITING AMPLIFIERS

Data Rate (Gbps)	Function	Small Signal Bandwidth (GHz)	Differential Gain (dB)	Deterministic Jitter (ps p-p)	Additive Random Jitter (ps rms)	Supply Current	Package	ECCN Code	Part Number
12.5	Limiting Amplifier	11	44	5	0.2	+5V @ 106 mA	LP4	EAR99	HMC750LP4E
12.5	Limiting Amplifier with LOS	9.5	32	-	0.9	+3.3V @ 47 mA	LP4	EAR99	HMC914LP4E
32	Limiting with DC Offset	25	30	5	0.3	+3.3V @ 90 mA	LC3C	EAR99	HMC865LC3C
32	Limiting without DC Offset	25	29	7	0.3	+3.3V @ 85 mA	LC3C	EAR99	HMC866LC3C

MUX & DEMUX

Data / Clock Rate (Gbps / GHz)	Function	Rise / Fall (ps)	Deterministic Jitter (ps)	Differential Output Voltage Swing (Vp-p)	DC Power Consumption (mW)	Vee Power Supply (Vdc)	Package	ECCN Code	Part Number
32 / 16	2:1 Mux*	15 / 15	-	1.25	480	±3.3	LC4B	3A001.a.11.b	HMC954LC4B
28 / 14	4:1 Mux with Adj. Vout	16 / 16	4	0.7 - 1.25	510	-3.3	LC5	3A001.a.11.b	HMC854LC5
45 / 22.5	4:1 Mux*	11 / 12	3	0.25 - 0.9	1782	+3.3	LC5	3A001.a.11.b	HMC847LC5
32 / 16	1:2 Demux with High Speed Invert*	19 / 18	< 3	1.0	644	±3.3	LC4B	3A001.a.11.b	HMC955LC4B
28 / 14	1:4 Demux with Adj. Vout	22 / 22	-	0.45 - 1.14	644	-3.3	LC5	3A001.a.11.b	HMC855LC5
45 / 22.5	1:4 Demux with Adj. Vout	25 / 21	4	0.3 - 1.0	1782	+3.3	LC5	3A001.a.11.b	HMC848LC5

* With Programmable Output Voltage and/or Duty Cycle Control

OPTICAL MODULATOR DRIVERS

Data Rate Max. (Gbps)	Function	Gain (dB)	Group Delay Variation (ps)	Additive Jitter (ps)	Output Voltage Max. (Vp-p)	Package	ECCN Code	Part Number
22.5	8Vpp Optical Modulator Driver	18	±15	0.3	8	LC5	EAR99	HMC870LC5 [1]
22.5	3Vpp Optical Modulator Driver	15	±15	0.3	3	LC5	EAR99	HMC871LC5 [1]
32	3Vpp Optical Modulator Driver, with Peak Detect	14	±5	0.3	3	Chip	EAR99	HMC1050 [1] [2]
32	8Vpp Optical Modulator Driver, with Peak Detect	16	±5	0.3	8	Chip	EAR99	HMC1051 [1] [2]
NEW! 32	8Vpp Optical Modulator Driver, SMT Package	32	±7	0.25	8	BGA	EAR99	HMC5850BG [1] [2]

[1] Drivers that benefit from Hittite Active Bias Controllers


[2] Request Data Sheet: FO@hittite.com

TRANSIMPEDANCE AMPLIFIERS


Data Rate (Gbps)	Function	Transimpedance (kΩ)	Input Overload (mApp)	Small Signal Bandwidth (GHz)	Deterministic Jitter (ps)	Noise (pA/√Hz)	Package	ECCN Code	Part Number
0.1 - 1.0	Low Noise Transimpedance Amplifier	10	20	0.7	< 100	4.6	LP3	EAR99	HMC799LP3E
1 - 10	Transimpedance Amplifier	1.25	3	7.5	< 10	11	Chip	EAR99	HMC690

Baseband and Zero IF Communication

DIRECT CONVERSION RECEIVER WITH DIVERSITY FEATURING THE HMCAD1520 A/D CONVERTER

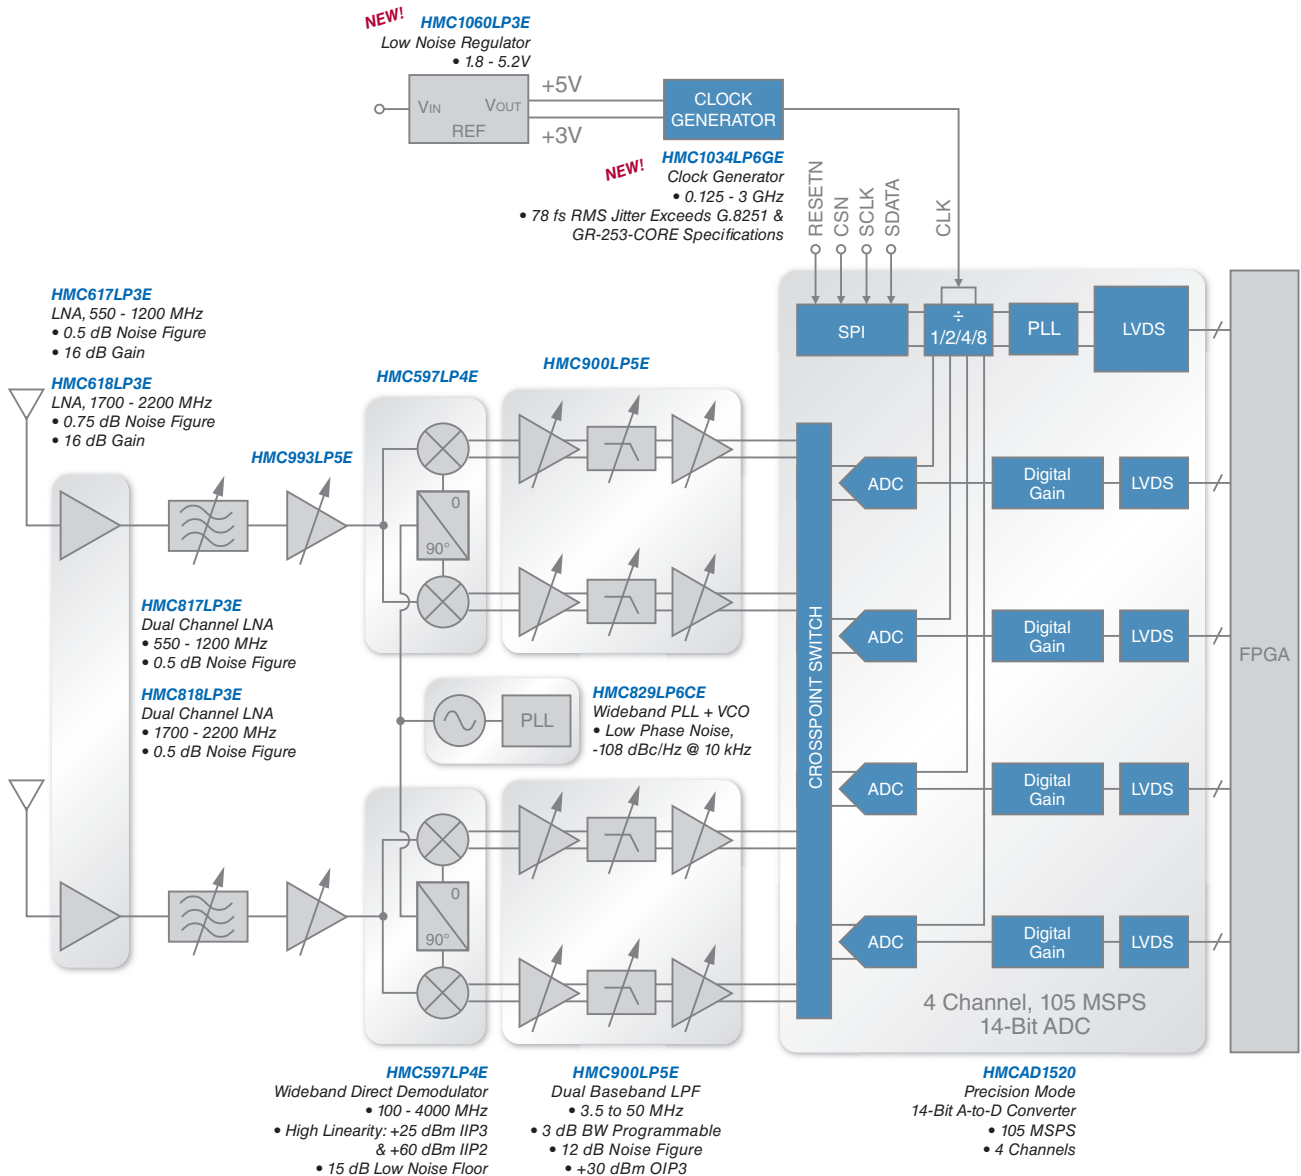


ADC / DAC CLOCK DRIVER CIRCUIT

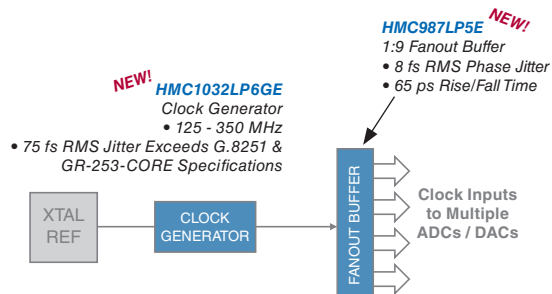


Typical Fiber Optic & Networking applications are illustrated.
See the full product listing for alternatives to the select HMC products shown in each functional block.


100G DWDM TRANSPONDER TRANSMIT PATH

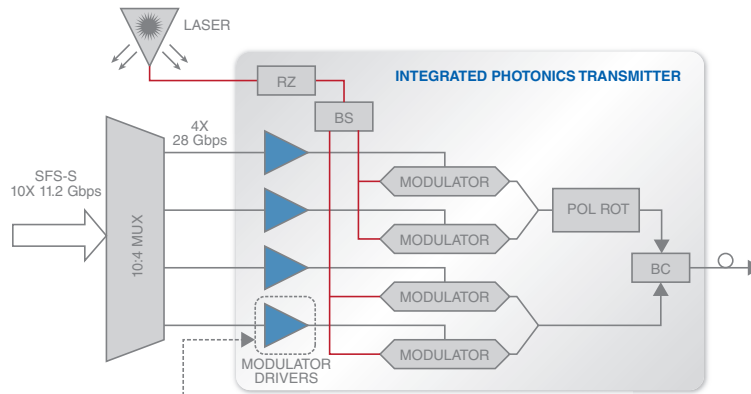

CASCADED CONFIGURATION FOR DRIVING MZ MODULATOR

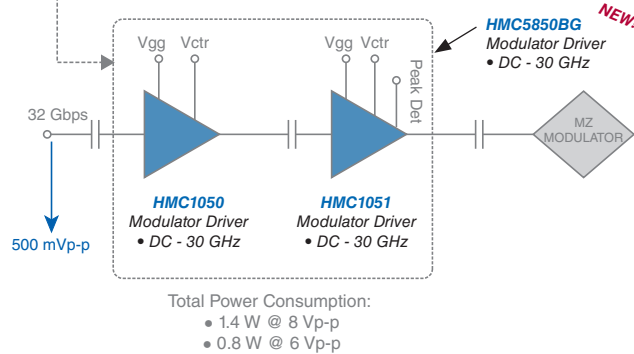


CASCADED CONFIGURATION FOR DRIVING MZ MODULATOR

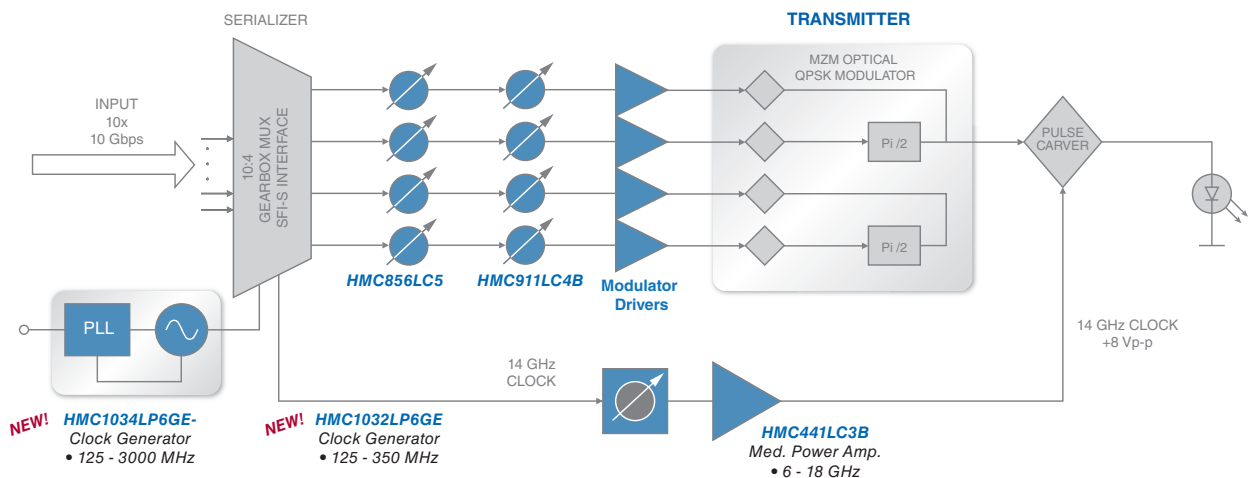


Typical Fiber Optic & Networking applications are illustrated.
See the full product listing for alternatives to the select HMC products shown in each functional block.

Fiber Optics & Networking


TYPICAL SERIAL FIBER OPTIC DATA TRANSMISSION SYSTEM

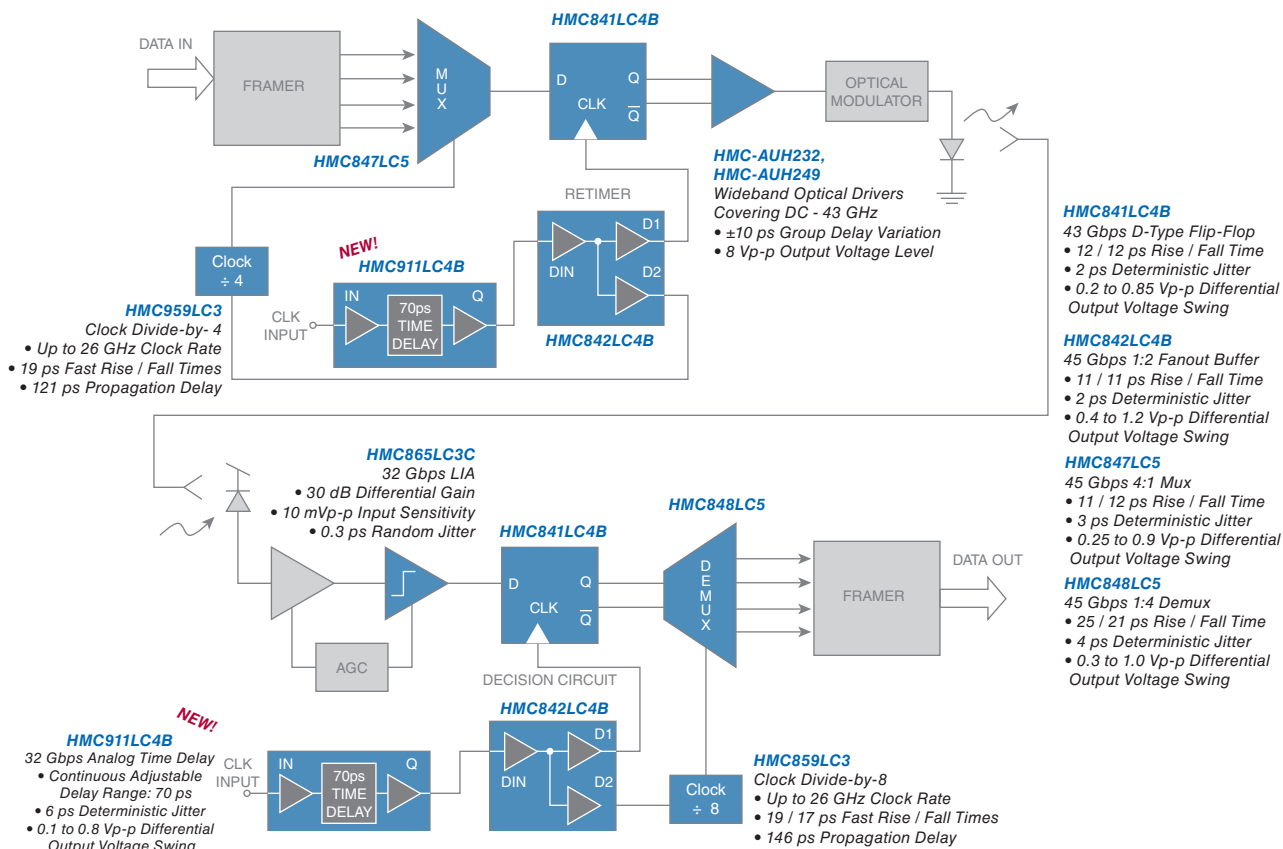

43 GBPS HOGGE PHASE DETECTOR FOR CLOCK & DATA RECOVERY

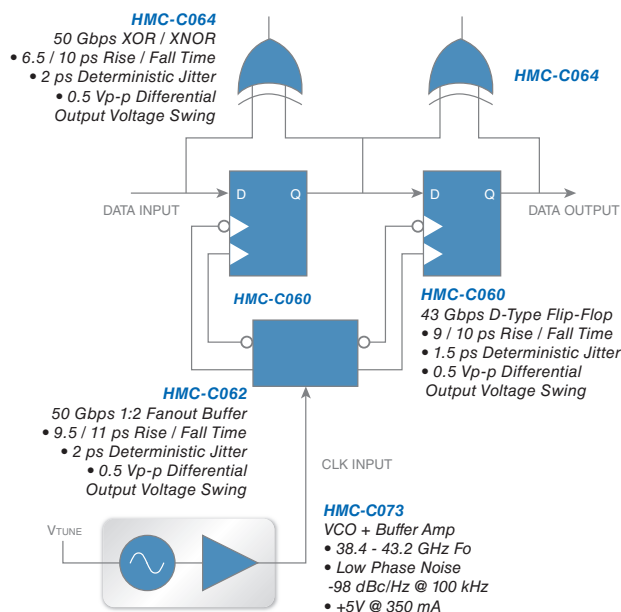

13 GBPS, NRZ-TO-RZ CONVERSION

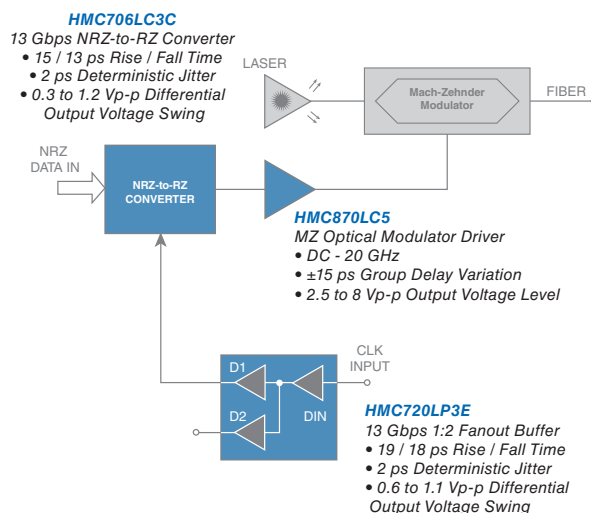

Typical Fiber Optic & Networking applications are illustrated. See the full product listing for alternatives to the select HMC products shown in each functional block.

HMC988LP3E Programmable Clock Divider and Delay Management IC


NEW!




Features

- ◆ Programmable Clock Divide by 1/2/4/8/16/32
- ◆ Delay Adjustment in Multiples of 1/2 Clock Cycles or in 60 Steps of 20 ps (Typ.)
- ◆ -170 dBc/Hz Noise Floor @ 100 MHz Output
- ◆ Up to 4 GHz Operation with 800 mVp-p LVPECL Output
- ◆ 3.3V Operation (or 5V Operation with Optional On-Chip Regulator for Best Performance)

Phase Noise Floor Performance vs. Output Frequency

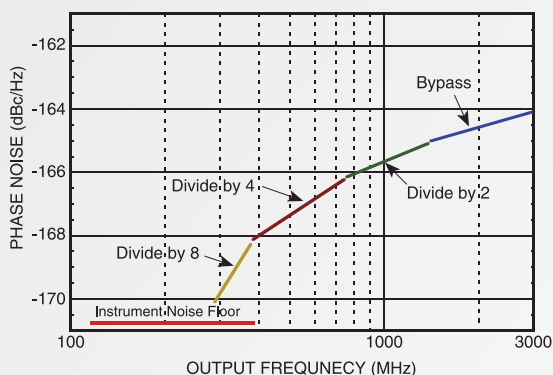

Delay vs. Delay Line Setpoint

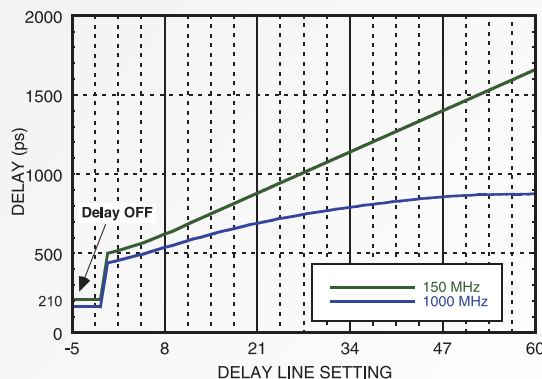

Ideal for Data Converter Sample Clock Phase Adjustment in Basestation, ATE and Networking Applications!

HMC1031MS8E Clock Generator with Integer-N PLL


NEW!



Features

- ◆ Integer-N PLL Clock Generator with External VCO/VCXO
- ◆ Ultra-Low Power Consumption: <2 mA Typical in Normal Operation
- ◆ Output Frequency: Up to 500 MHz
- ◆ Hardware Pin Programmable Reference Clock Multiplication Ratios of x1, x5 and x10
- ◆ Phase Noise Floor (Figure of Merit): -208 dBc/Hz (Typ.)

Typical Closed Loop Phase Noise, HMC1031MS8E as Jitter Attenuator

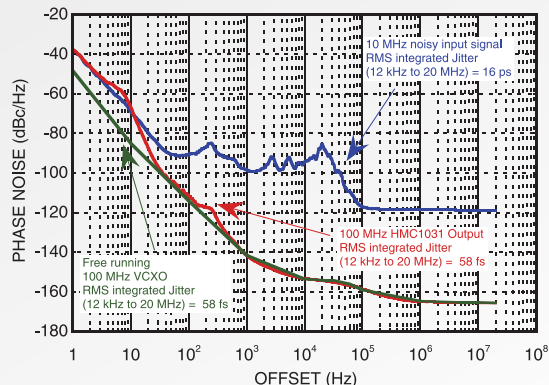

Ultra-Low Power Integer PLL Clock Generator for Jitter Attenuation and Frequency Translation!

SMT & Chip (Die) Products

CLOCKS & TIMING

Clock Distribution

	Max. Clock Rate (GHz)	Function	Input	Output	Phase Jitter (12 k to 20 MHz)	Rise/Fall Time (ps)	Channel Skew (ps)	Disable Mode	Power Supply (V)	Package	ECCN Code	Part Number
NEW!	4	Clock Divider & Delay Management	LVPECL, LVDS, CML, CMOS	LVPECL	13 fs RMS	90	300 to 1500	Yes	5 or 3.3	LP3	3A001.a.11.b	HMC988LP3E
	8	1:9 Fanout Buffer	LVPECL, LVDS, CML, CMOS	LVPECL	8 fs RMS	65	3.1	Yes	3.3	LP5	3A001.a.11.b	HMC987LP5E

Clock Generators

	Max. Frequency (MHz)	Function	Typical Phase Jitter (fsRMS)	Phase Noise Floor (dBc/Hz)	Maximum Reference Freq. (MHz)	Typical Power Consumption (W)	Figure of Merit (Frac/Int) (dBc/Hz)	Package	ECCN Code	Part Number
NEW!	500	Integer Mode PLL (x1, x5, x10)	Defined by VCXO	Defined by VCXO	140	0.0064	-208	MS8	EAR99	HMC1031MS8E
	350	Clock Generator with Fractional-N PLL+VCO	116 / 75	-165	350	0.86	-227 / -230	LP6G	3A001.a.11.b	HMC1032LP6GE
	3000	Clock Generator with Fractional-N PLL+VCO	118 / 78	-165	350	0.86	-227 / -230	LP6G	3A001.a.11.b	HMC1034LP6GE

PLLs with INTEGRATED VCOs - RF & Wideband PLLs with Integrated VCOs

	Frequency (MHz)	Function	Closed Loop SSB Phase Noise @ 10 kHz Offset	Open Loop VCO Phase Noise @ 1 MHz Offset	Pout (dBm)	RMS Jitter Fractional Mode (fs)	Integrated PN Fractional Mode (deg rms)	Package	ECCN Code	Part Number
fo/2										
	665 - 825	Tri-Band RF VCO	-118 dBc/Hz	-148 dBc/Hz	11	180	0.05	LP6C	3A001.a.11.b	HMC822LP6CE
	795 - 945	Tri-Band RF VCO	-123 dBc/Hz	-148 dBc/Hz	10	180	0.06	LP6C	3A001.a.11.b	HMC838LP6CE
	780 - 870	RF VCO	-116 dBc/Hz	-148 dBc/Hz	14	180	0.06	LP6C	3A001.a.11.b	HMC824LP6CE
	860 - 1040	Tri-Band RF VCO	-118 dBc/Hz	-147 dBc/Hz	10	180	0.07	LP6C	3A001.a.11.b	HMC821LP6CE
	990 - 1105	RF VCO	-114 dBc/Hz	-146 dBc/Hz	11	180	0.07	LP6C	3A001.a.11.b	HMC826LP6CE
	1025 - 1150	Tri-Band RF VCO	-123 dBc/Hz	-147 dBc/Hz	12	180	0.07	LP6C	3A001.a.11.b	HMC837LP6CE
	1050 - 1205	Tri-Band RF VCO	-121 dBc/Hz	-146 dBc/Hz	10	180	0.08	LP6C	3A001.a.11.b	HMC839LP6CE
	1095 - 1275	Tri-Band RF VCO	-118 dBc/Hz	-147 dBc/Hz	10	180	0.08	LP6C	3A001.a.11.b	HMC820LP6CE
	1310 - 1415	Tri-Band RF VCO	-121 dBc/Hz	-145 dBc/Hz	10	180	0.09	LP6C	3A001.a.11.b	HMC840LP6CE
fo										
	1285 - 1415	RF VCO	-112 dBc/Hz	-143 dBc/Hz	10	180	0.09	LP6C	3A001.a.11.b	HMC828LP6CE
	1330 - 1650	Tri-Band RF VCO	-112 dBc/Hz	-142 dBc/Hz	6.5	180	0.11	LP6C	3A001.a.11.b	HMC822LP6CE
	1590 - 1890	Tri-Band RF VCO	-118 dBc/Hz	-143 dBc/Hz	7.5	180	0.12	LP6C	3A001.a.11.b	HMC838LP6CE
	1720 - 2080	Tri-Band RF VCO	-112 dBc/Hz	-141 dBc/Hz	6.5	180	0.13	LP6C	3A001.a.11.b	HMC821LP6CE
	1815 - 2010	RF VCO	-112 dBc/Hz	-143 dBc/Hz	7.5	180	0.13	LP6C	3A001.a.11.b	HMC831LP6CE
	2050 - 2300	Tri-Band RF VCO	-117 dBc/Hz	-141 dBc/Hz	10.5	180	0.15	LP6C	3A001.a.11.b	HMC837LP6CE
	2100 - 2410	Tri-Band RF VCO	-115 dBc/Hz	-140 dBc/Hz	7.5	180	0.16	LP6C	3A001.a.11.b	HMC839LP6CE
	2190 - 2550	Tri-Band RF VCO	-112 dBc/Hz	-141 dBc/Hz	6.5	180	0.17	LP6C	3A001.a.11.b	HMC820LP6CE
	2620 - 2830	Tri-Band RF VCO	-115 dBc/Hz	-139 dBc/Hz	9	180	0.18	LP6C	3A001.a.11.b	HMC840LP6CE
2fo										
	2660 - 3300	Tri-Band RF VCO	-106 dBc/Hz	-136 dBc/Hz	-4	180	0.21	LP6C	3A001.a.11.b	HMC822LP6CE
	3180 - 3780	Tri-Band RF VCO	-112 dBc/Hz	-135 dBc/Hz	-4	180	0.24	LP6C	3A001.a.11.b	HMC838LP6CE
	3365 - 3705	RF VCO	-107 dBc/Hz	-135 dBc/Hz	0	190	0.25	LP6C	3A001.a.11.b	HMC836LP6CE
	3440 - 4160	Tri-Band RF VCO	-106 dBc/Hz	-135 dBc/Hz	-4	180	0.27	LP6C	3A001.a.11.b	HMC821LP6CE
	4100 - 4600	Tri-Band RF VCO	-111 dBc/Hz	-135 dBc/Hz	-0.5	180	0.30	LP6C	3A001.a.11.b	HMC837LP6CE
	4200 - 4820	Tri-Band RF VCO	-108 dBc/Hz	-135 dBc/Hz	-4	180	0.31	LP6C	3A001.a.11.b	HMC839LP6CE
	4380 - 5100	Tri-Band RF VCO	-106 dBc/Hz	-135 dBc/Hz	-4	180	0.33	LP6C	3A001.a.11.b	HMC820LP6CE
	5240 - 5660	Tri-Band RF VCO	-109 dBc/Hz	-133 dBc/Hz	-3	180	0.37	LP6C	3A001.a.11.b	HMC840LP6CE

Wideband Continuous Tuning

25 - 3000	Wideband RF VCO	-114 dBc/Hz @ 2 GHz	-141 dBc/Hz @ 2 GHz	5	82 [1]	0.114 @ 2 GHz	LP6G	3A001.a.11.b	HMC830LP6GE
25 - 6000	Wideband RF VCO	-108 dBc/Hz @ 4 GHz	-135 dBc/Hz @ 4 GHz	-4	82 [1]	0.22 @ 4 GHz	LP6G	3A001.a.11.b	HMC833LP6GE
45 - 1050 1400 - 2100 2800 - 4200 Fo	Wideband RF VCO	-108 dBc/Hz @ 4 GHz	-134 dBc/Hz @ 4 GHz	4	82 [1]	0.229 @ 4 GHz	LP6G	3A001.a.11.b	HMC829LP6GE
45 - 1050 1400 - 2100 2800 - 4200 Fo 5600 - 8400	Wideband RF VCO	-102 dBc/Hz @ 8 GHz	-128 dBc/Hz @ 8 GHz	5 2 2 -10	82 [1]	0.43 @ 8 GHz	LP6G	3A001.a.11.b	HMC834LP6GE

[1] RMS Jitter Integration Bandwidth from 12 kHz to 20 MHz


*Please note the DC Power Conditioning Table is in the LO Generation ICs Section.

Please note the DC Power Conditioning Table is in the LO Generation ICs Section.


Clock Generators for Data Converters Clocking

EXTRACT THE BEST SNR PERFORMANCE FROM YOUR DATA CONVERTERS!

- ◆ HMC1034LP6GE achieves <100 fs RMS Phase Jitter in Integer Mode
- ◆ HMC987LP5E, 1:8 LVPECL Fan-Out Buffer Distributes Data Converter Sample Clocks with Only 8 fs RMS Additive Jitter (12 kHz - 20 MHz)
- ◆ HMC988LP3E Clock Divider & Delay Management IC Adjusts Data Converter Sample Clock Windows in 20 ps Resolution and Offers -170 dBc/Hz Phase Noise Floor

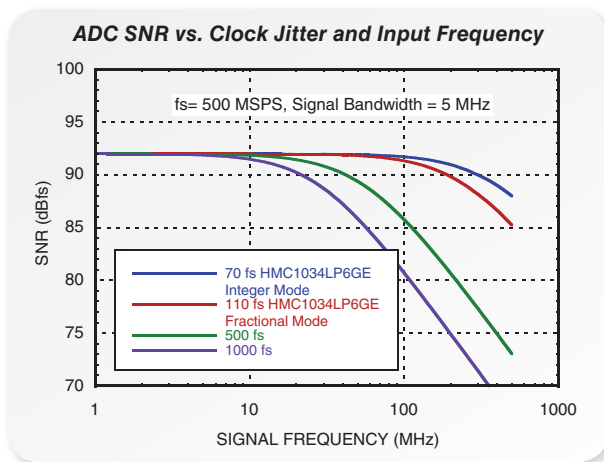

The low phase noise floor of a clock signal as well as its low integrated phase jitter helps to minimize the SNR degradation at high ADC / DAC input frequencies in multi-carrier, multi-acquisition applications. Hittite's Clock & Timing ICs are designed with data converter applications in mind, and work well with Hittite's High-Speed ADC devices.

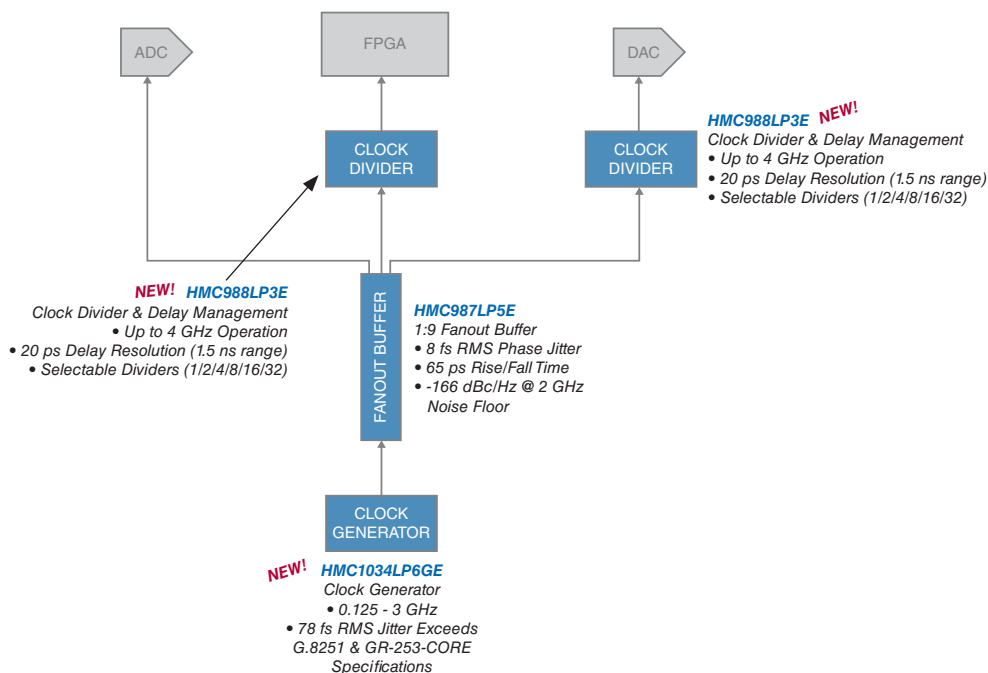


MARKET & APPLICATION GUIDE

Clocks & Timing

FOR BROADBAND, CELLULAR INFRASTRUCTURE AND FIBER OPTIC & NETWORKING


Features

- ◆ Low Noise Floor of -166 dBc/Hz Makes the HMC987LP5E Ideal for Clocking High Performance ADC / DAC & SERDES Devices
- ◆ HMC1031MS8E Ultra-Low Power Integer Mode PLL Enables Jitter Attenuation with 1.6 mA Typical Current Consumption from a Single 3.3V Supply
- ◆ HMC988LP3E Offers Selectable Frequency Division and Clock Delay Management with 20 ps Resolution Up to 1.5 ns Total Delay Range
- ◆ <100 fs Integrated Phase Jitter of the HMC1031LPGE Clock Generator Improves Data Converter SNR

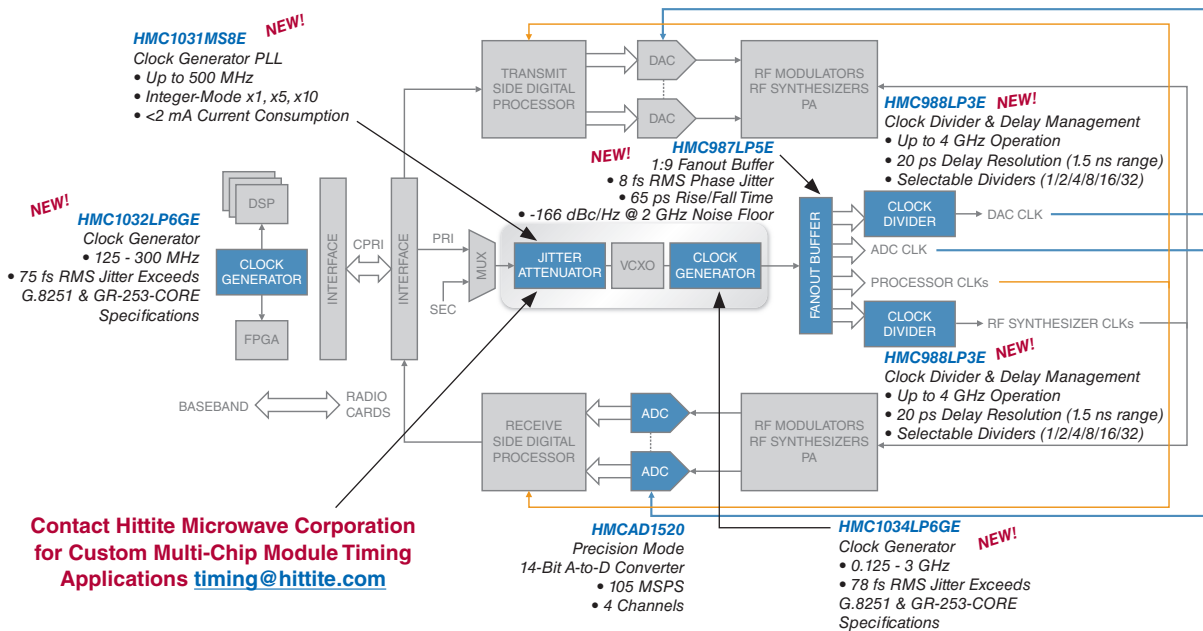

Contact Us: timing@hittite.com

REFERENCE CLOCK SOLUTIONS FOR 100G DP-QPSK

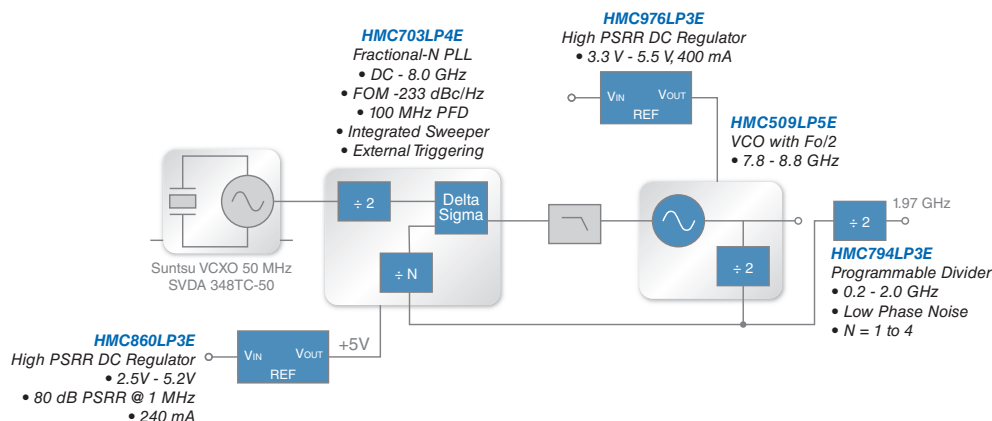

Contact Us: timing@hittite.com

Typical Clocks & Timing ICs applications are illustrated.
 See the full product listing for alternatives to the select HMC products shown in each functional block.

FOR BROADBAND, CELLULAR INFRASTRUCTURE AND FIBER OPTIC & NETWORKING

Features

- ◆ <10 fs 12 kHz - 20 MHz integrated Phase Jitter Performance of HMC987LP5E Enables High Performance Clock Distribution With Negligible Jitter Generation
- ◆ A Flexible Input Interface Allows The HMC987LP5E LVDS, CML & CMOS Inputs to 8 LVPECL Outputs
- ◆ HMC1034LP6GE May Be Used For Clock Generation & Fractional Multiplication With Outputs Up to 3 GHz
- ◆ The HMC1034LP6GE Achieves Industry Leading Phase Jitter of 78 fs RMS


NEW!

HMC1032LP6GE

Clock Generator

- 125 - 300 MHz

- 75 fs RMS Jitter Exceeds G.8251 & GR-253-CORE Specifications

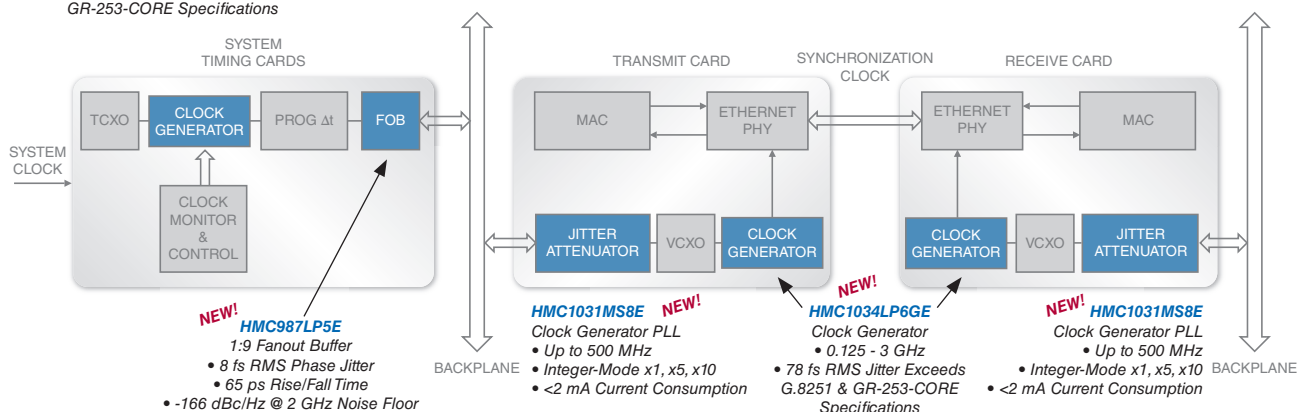

Contact Us: timing@hittite.com

LO FREQUENCY GENERATION ICs



SMT & Chip (Die) Products

DC POWER CONDITIONING - Linear Voltage Regulators

Input Voltage (V)	Function	Output Voltage (V)	Output Current (mA)	Power Supply Rejection Ratio (PSRR) (dB)		Output Noise Spectral Density (nV/√Hz)		Regulated Outputs	Package	ECCN Code	Part Number
				1 kHz	1 MHz	1 kHz	10 kHz				
3.35 - 5.6	Quad High PSRR	2.5 - 5.2	15 - 100	80	60	7	3	4	LP3	EAR99	HMC860LP3E
3.35 - 5.6	Low Noise, High PSRR	1.8 - 5.2	500	80	60	7	3	4	LP3	EAR99	HMC1060LP3E
4.8 to 5.6	Low Noise, High PSRR	1.8 to 5.1	400	60	30	6	3	1	LP3	EAR99	HMC976LP3E

FILTERS - Tunable

Programmable Harmonic

Frequency Range (GHz)	Function	Return Loss (dB)	3 dB Bandwidth (GHz)	Stopband Frequency (Rej. >10 dB)	Tuning Response (ns)	Package	ECCN Code	Part Number
NEW! DC - 9	Programmable Harmonic Low Pass	10	1 - 3	1.2 Fcutoff	10	LP3	EAR99	HMC1044LP3E

FREQUENCY DIVIDERS (PRESCALERS) & DETECTORS

Frequency Dividers & Phase / Frequency Detectors

Input Frequency (GHz)	Function	Input Power (dBm)	Output Power (dBm)	100 kHz SSB Phase Noise (dBc/Hz)	Bias Supply	Package	ECCN Code	Part Number
DC - 8	Divide-by-2	-12 to +12	-6	-148	+3V @ 42 mA	SOT26	3A001.a.11.b	HMC432E
DC - 10	Divide-by-2	-15 to +10	3	-148	+5V @ 83 mA	S8G	3A001.a.11.b	HMC361S8GE
DC - 11	Divide-by-2	-15 to +10	3	-148	+5V @ 105 mA	Chip	3A001.a.11.b	HMC361
DC - 12.5	Divide-by-2	-15 to +10	2	-145	+5V @ 105 mA	S8G	3A001.a.11.b	HMC364S8GE
DC - 13	Divide-by-2	-15 to +10	3	-148	+5V @ 84 mA	G8	3A001.a.11.b	HMC361G8
DC - 13	Divide-by-2	-15 to +10	1	-145	+5V @ 105 mA	Chip	3A001.a.11.b	HMC364
DC - 13	Divide-by-2	-15 to +10	5	-145	+5V @ 110 mA	G8 Hermetic	3A001.a.11.b	HMC364G8
DC - 18	Divide-by-2	-15 to +10	-4	-150	+5V @ 77 mA	LP3	3A001.a.11.b	HMC492LP3E
DC - 7	Divide-by-3	-12 to +12	-2	-153	+5V @ 69 mA	MS8G	3A001.a.11.b	HMC437MS8GE
DC - 4	Divide-by-4	-15 to +10	3.5	-146	+3V @ 13 mA	MS8	3A001.a.11.b	HMC426MS8E
DC - 8	Divide-by-4	-12 to +12	-3	-150	+3V @ 53 mA	SOT26	3A001.a.11.b	HMC433E
DC - 11	Divide-by-4	-15 to +10	-6	-149	+5V @ 68 mA	Chip	3A001.a.11.b	HMC362
DC - 12	Divide-by-4	-15 to +10	-6	-149	+5V @ 68 mA	S8G	3A001.a.11.b	HMC362S8GE
DC - 13	Divide-by-4	-15 to +10	2	-151	+5V @ 110 mA	Chip	3A001.a.11.b	HMC365
DC - 13	Divide-by-4	-15 to +10	7	-151	+5V @ 120 mA	G8 Hermetic	3A001.a.11.b	HMC365G8
DC - 13	Divide-by-4	-15 to +10	2	-151	+5V @ 110 mA	S8G	3A001.a.11.b	HMC365S8GE
DC - 18	Divide-by-4	-15 to +10	-4	-150	+5V @ 96 mA	LP3	3A001.a.11.b	HMC493LP3E
10 - 26	Divide-by-4	-15 to +10	-4	-150	+5V @ 96 mA	LC3	3A001.a.11.b	HMC447LC3
DC - 7	Divide-by-5	-12 to +12	-1	-153	+5V @ 80 mA	MS8G	3A001.a.11.b	HMC438MS8GE
DC - 8	Divide-by-8	-5 to +12	-2	-150	+3V @ 62 mA	SOT26	3A001.a.11.b	HMC434E
DC - 12	Divide-by-8	-15 to +10	-9	-153	+5V @ 70 mA	Chip	3A001.a.11.b	HMC363
DC - 12	Divide-by-8	-15 to +10	4	-153	+5V @ 90 mA	G8 Hermetic	3A001.a.11.b	HMC363G8
DC - 12	Divide-by-8	-15 to +10	-9	-153	+5V @ 70 mA	S8G	3A001.a.11.b	HMC363S8GE
DC - 18	Divide-by-8	-15 to +10	-4	-150	+5V @ 105 mA	LP3	3A001.a.11.b	HMC494LP3E
0.1 - 6.5	Programmable Divider (N = 1 to 17)	-15 to +10	0	-153	+5V @ 200 mA	LP4	3A001.a.11.b	HMC705LP4E
0.1 - 13.0	Programmable Divider (N = 1, 3)	-10 to +10	2	-152	+5V @ 185 mA	LP3	3A001.a.11.b	HMC861LP3E
0.1 - 15	Programmable Divider (N = 1, 2, 4, 8)	-15 to 10	2	-153	+5V @ 105 mA	LP3	3A001.a.11.b	HMC862LP3E
0.2 - 2.0	Programmable Divider (N = 1 to 4)	-2 to +10	10	-160	+5V @ 135 mA	LP3	3A001.a.11.b	HMC794LP3E
0.4 - 6.0	Programmable Divider (N = 1 to 4)	0 to +9	5	-156	+3.3V @ 100 mA	LP3	3A001.a.11.b	HMC905LP3E
DC - 2.2	5-bit Counter, +2 to 32	-15 to +10	4	-153	+5V @ 194 mA	LP4	3A001.a.11.b	HMC394LP4E
0.01 - 1.3	Phase Frequency Detector	-10 to +10	2 Vp-p	-153	+5V @ 96 mA	QS16G	3A001.a.11.b	HMC439QS16GE

Fractional Divider & Frequency Detector

Input Frequency (GHz)	Function	Input Power (dBm)	Output Level (dBm)	Floor FOM (dBc/Hz)	Bias Supply	Package	ECCN Code	Part Number
DC - 7	48-Bit Delta Sigma Programmable Fractional Divider with Sweeper	-15 to -3	0.75 Vp-p to 2 Vp-p into 100 Ohm	-160	+5V @ 1 mA +3V @ 244 mA	LP5	3A001.a.11.b	HMC983LP5E
DC - 0.35	Frequency Detector & Charge Pump	3 to 15	0.02 to 2.5 mA	-231	+5V @ 97 mA +3V @ 27 mA	LP4	EAR99	HMC984LP4E

FREQUENCY MULTIPLIERS - Active

Input Frequency (GHz)	Function	Output Frequency (GHz)	Input Power (dBm)	Output Power (dBm)	100 kHz SSB Phase Noise (dBc/Hz)	Package	ECCN Code	Part Number
3 - 4	x2 Active	6 - 9	0	17	-140	LP4	EAR99	HMC575LP4E
4.0 - 10.5	x2 Active	8 - 21	5	17	-139	Chip	EAR99	HMC561
4.0 - 10.5	x2 Active	8 - 21	5	14	-139	LP3	EAR99	HMC561LP3E
4 - 11	x2 Active	8 - 22	5	12	-134	LC3B	EAR99	HMC573LC3B
4.5 - 8.0	x2 Active	9 - 16	2	15	-140	LP4	EAR99	HMC368LP4E
4.95 - 6.35	x2 Active	9.9 - 12.7	0	4	-142	LP3	EAR99	HMC369LP3E
6.5 - 12.3	x2 Active	13.0 - 24.6	4	17	-136	Chip	EAR99	HMC814

FREQUENCY MULTIPLIERS - Active

Input Frequency (GHz)	Function	Output Frequency (GHz)	Input Power (dBm)	Output Power (dBm)	100 kHz SSB Phase Noise (dBc/Hz)	Package	ECCN Code	Part Number
6.5 - 12.3	x2 Active	13.0 - 24.6	4	17	-136	LC3B	EAR99	HMC814LC3B
9.0 - 14.5	x2 Active	18 - 29	3	17	-132	Chip	EAR99	HMC576
9.0 - 14.5	x2 Active	18 - 29	3	15	-132	LC3B	EAR99	HMC576LC3B
9.5 - 12.5	x2 Active	19 - 25	0	11	-135	Chip	EAR99	HMC448
10.0 - 12.5	x2 Active	20 - 25	0	11	-135	LC3B	EAR99	HMC448LC3B
11 - 23	x2 Active	22 - 46	5	15	-	Chip	EAR99	HMC598
12.0 - 16.5	x2 Active	24 - 33	3	17	-132	Chip	EAR99	HMC578
12.0 - 16.5	x2 Active	24 - 33	3	15	-132	LC3B	EAR99	HMC578LC3B
12.5 - 15.5	x2 Active	25 - 31	3	21	-	LP4	EAR99	HMC942LP4E
13.5 - 15.5	x2 Active	27 - 31	0	9	-132	LC3B	EAR99	HMC449LC3B
13.5 - 15.5	x2 Active	27 - 31	5	20	-128	LC4B	EAR99	HMC577LC4B
13.5 - 16.5	x2 Active	27 - 33	0	10	-132	Chip	EAR99	HMC449
16 - 23	x2 Active	32 - 46	3	13	-127	Chip	EAR99	HMC579
2.66 - 5.33	x3 Active	8 - 16	5	2	-152	LP3	EAR99	HMC916LP3E
1.5 - 2.5	x4 Active	6 - 10	5	2	-148	LP3	EAR99	HMC917LP3E
2.45 - 2.8	x4 Active	9.8 - 11.2	-15	3	-142	LP4	EAR99	HMC443LP4E
2.85 - 3.3	x4 Active	11.4 - 13.2	-15 to +5	7	-140	LP4	EAR99	HMC695LP4E
3.6 - 4.1	x4 Active	14.4 - 16.4	-15	0	-140	LP4	EAR99	HMC370LP4E
14 - 16	x4 Active	56 - 64	2	-6	-	Chip	3A001.b.2.f	HMC-XDH158
1.2375 - 1.4	x8 Active	9.9 - 11.2	-15	6	-136	LP4	EAR99	HMC444LP4E
0.61875 - 0.6875	x16 Active	9.9 - 11	-15	7	-130	LP4	EAR99	HMC445LP4E

FREQUENCY MULTIPLIERS - Passive

Input Frequency (GHz)	Function	Output Frequency (GHz)	Conversion Loss (dB)	1Fo / 4Fo Isolation (dB)	Input Drive (dBm)	Package	ECCN Code	Part Number
0.7 - 2.4	x2 Passive	1.4 - 4.8	15	47 / 38	10 to 20	Chip	EAR99	HMC156
0.7 - 2.4	x2 Passive	1.4 - 4.8	15	47 / 38	10 to 20	C8	EAR99	HMC156C8
0.85 - 2.0	x2 Passive	1.7 - 4.0	15	45 / 40	10 to 20	MS8	EAR99	HMC187AMS8E
1.25 - 3.0	x2 Passive	2.5 - 6.0	15	45 / 45	10 to 20	MS8	EAR99	HMC188MS8E
1.3 - 4.0	x2 Passive	2.6 - 8.0	15	45 / 40	10 to 20	Chip	EAR99	HMC158
1.3 - 4.0	x2 Passive	2.6 - 8.0	15	45 / 40	10 to 20	C8	EAR99	HMC158C8
2 - 4	x2 Passive	4 - 8	13	34 / 40	10 to 15	MS8	EAR99	HMC189AMS8E
4 - 8	x2 Passive	8 - 16	20	45 / 38	10 to 15	Chip	EAR99	HMC204
4 - 8	x2 Passive	8 - 16	17	41 / 40	10 to 15	C8	EAR99	HMC204C8
4 - 8	x2 Passive	8 - 16	17	42 / 50	10 to 15	MS8G	EAR99	HMC204MS8GE
6 - 12	x2 Passive	12 - 24	17	32 / 32	10 to 15	Chip	EAR99	HMC205
10 - 15	x2 Passive	20 - 30	13	30	+13	Chip	5A991.h	HMC-XDB112
12 - 18	x2 Passive	24 - 36	14	50 / 60	11 to 15	Chip	EAR99	HMC331
24 - 30	x3 Passive	72 - 90	19	-	+13	Chip	5A991.h	HMC-XTB110

PHASE LOCKED LOOP - Fractional-N & Integer-N ICs

Frequency	Function	Max. PFD Frequency	Max. Reference Frequency	Figure of Merit (Frac/Int) (dBc/Hz)	Frequency Resolution w/ 50 MHz Ref.	Bias Supply	Package	ECCN Code	Part Number
10 kHz - 8 GHz	Fractional-N with Sweeper	75 MHz	200 MHz	-221 / -227	3 Hz	+5V @ 37 mA +3.3V @ 90 mA	LP6C	3A001.a.11.b	HMC701LP6CE
10 kHz - 14 GHz	Fractional-N with Sweeper	75 MHz	200 MHz	-221 / -227	6 Hz	+5V @ 37 mA +3.3V @ 136 mA	LP6C	3A001.a.11.b	HMC702LP6CE
10 MHz - 8 GHz	Fractional-N	70 MHz	200 MHz	-221 / -226	3 Hz	+5V @ 7 mA +3.3V @ 95 mA	LP4	3A001.a.11.b	HMC700LP4E
DC - 7	Fractional-N with Sweeper	150 MHz	-	-228 / -231	10 Hz	+5V @ 97 mA +3V @ 149 mA	LP5	3A001.a.11.b	HMC983LP5E
DC - 7	Fractional-N with Sweeper	150 MHz	-	-228 / -231	10 Hz	+5V @ 97 mA +3V @ 149 mA	LP4	3A001.a.11.b	HMC984LP4E
DC - 8 GHz	Fractional-N with Sweeper	100 MHz	350 MHz	-230 / -233	3 Hz	+5V @ 6 mA +3.3V @ 52 mA	LP4	3A001.a.11.b	HMC703LP4E
DC - 8 GHz	Fractional-N	100 MHz	350 MHz	-230 / -233	3 Hz	+5V @ 6 mA +3.3V @ 52 mA	LP4	3A001.a.11.b	HMC704LP4E
80 MHz - 7 GHz	Integer-N	1300 MHz	1300 MHz	-233	50 MHz	+5V @ 310 mA	LP5	3A001.a.11.b	HMC698LP5E
160 MHz - 7 GHz	Integer-N	1300 MHz	1300 MHz	-233	50 MHz	+5V @ 310 mA	LP5	3A001.a.11.b	HMC699LP5E
10 MHz - 2.8 GHz	Integer-N	1300 MHz	1300 MHz	-233	50 MHz	+5V @ 250 mA	QS16G	3A001.a.11.b	HMC440QS16GE

LO FREQUENCY GENERATION ICs

SMT & Chip (Die) Products

PLLs with INTEGRATED VCOs - Microwave & RF PLLs with Integrated VCOs

Frequency (MHz)	Function	Closed Loop SSB Phase Noise @ 10 kHz Offset	Open Loop VCO Phase Noise @ 1 MHz Offset	Pout (dBm)	RMS Jitter Fractional Mode (fs)	Integrated PN Fractional Mode (deg rms)	Package	ECCN Code	Part Number
fo/2									
665 - 825	Tri-Band RF VCO	-118 dBc/Hz	-148 dBc/Hz	11	180	0.05	LP6C	3A001.a.11.b	HMC822LP6CE
795 - 945	Tri-Band RF VCO	-123 dBc/Hz	-148 dBc/Hz	10	180	0.06	LP6C	3A001.a.11.b	HMC838LP6CE
780 - 870	RF VCO	-116 dBc/Hz	-148 dBc/Hz	14	180	0.06	LP6C	3A001.a.11.b	HMC824LP6CE
860 - 1040	Tri-Band RF VCO	-118 dBc/Hz	-147 dBc/Hz	10	180	0.07	LP6C	3A001.a.11.b	HMC821LP6CE
990 - 1105	RF VCO	-114 dBc/Hz	-146 dBc/Hz	11	180	0.07	LP6C	3A001.a.11.b	HMC826LP6CE
1025 - 1150	Tri-Band RF VCO	-123 dBc/Hz	-147 dBc/Hz	12	180	0.07	LP6C	3A001.a.11.b	HMC837LP6CE
1050 - 1205	Tri-Band RF VCO	-121 dBc/Hz	-146 dBc/Hz	10	180	0.08	LP6C	3A001.a.11.b	HMC839LP6CE
1095 - 1275	Tri-Band RF VCO	-118 dBc/Hz	-147 dBc/Hz	10	180	0.08	LP6C	3A001.a.11.b	HMC820LP6CE
1310 - 1415	Tri-Band RF VCO	-121 dBc/Hz	-145 dBc/Hz	10	180	0.09	LP6C	3A001.a.11.b	HMC840LP6CE
fo									
1285 - 1415	RF VCO	-112 dBc/Hz	-143 dBc/Hz	10	180	0.09	LP6C	3A001.a.11.b	HMC828LP6CE
1330 - 1650	Tri-Band RF VCO	-112 dBc/Hz	-142 dBc/Hz	6.5	180	0.11	LP6C	3A001.a.11.b	HMC822LP6CE
1590 - 1890	Tri-Band RF VCO	-118 dBc/Hz	-143 dBc/Hz	7.5	180	0.12	LP6C	3A001.a.11.b	HMC838LP6CE
1720 - 2080	Tri-Band RF VCO	-112 dBc/Hz	-141 dBc/Hz	6.5	180	0.13	LP6C	3A001.a.11.b	HMC821LP6CE
1815 - 2010	RF VCO	-112 dBc/Hz	-143 dBc/Hz	7.5	180	0.13	LP6C	3A001.a.11.b	HMC831LP6CE
2050 - 2300	Tri-Band RF VCO	-117 dBc/Hz	-141 dBc/Hz	10.5	180	0.15	LP6C	3A001.a.11.b	HMC837LP6CE
2100 - 2410	Tri-Band RF VCO	-115 dBc/Hz	-140 dBc/Hz	7.5	180	0.16	LP6C	3A001.a.11.b	HMC839LP6CE
2190 - 2550	Tri-Band RF VCO	-112 dBc/Hz	-141 dBc/Hz	6.5	180	0.17	LP6C	3A001.a.11.b	HMC820LP6CE
2620 - 2830	Tri-Band RF VCO	-115 dBc/Hz	-139 dBc/Hz	9	180	0.18	LP6C	3A001.a.11.b	HMC840LP6CE
2fo									
2660 - 3300	Tri-Band RF VCO	-106 dBc/Hz	-136 dBc/Hz	-4	180	0.21	LP6C	3A001.a.11.b	HMC822LP6CE
3180 - 3780	Tri-Band RF VCO	-112 dBc/Hz	-135 dBc/Hz	-4	180	0.24	LP6C	3A001.a.11.b	HMC838LP6CE
3365 - 3705	RF VCO	-107 dBc/Hz	-135 dBc/Hz	0	190	0.25	LP6C	3A001.a.11.b	HMC836LP6CE
3440 - 4160	Tri-Band RF VCO	-106 dBc/Hz	-135 dBc/Hz	-4	180	0.27	LP6C	3A001.a.11.b	HMC821LP6CE
4100 - 4600	Tri-Band RF VCO	-111 dBc/Hz	-135 dBc/Hz	-0.5	180	0.30	LP6C	3A001.a.11.b	HMC837LP6CE
4200 - 4820	Tri-Band RF VCO	-108 dBc/Hz	-135 dBc/Hz	-4	180	0.31	LP6C	3A001.a.11.b	HMC839LP6CE
4380 - 5100	Tri-Band RF VCO	-106 dBc/Hz	-135 dBc/Hz	-4	180	0.33	LP6C	3A001.a.11.b	HMC820LP6CE
5240 - 5660	Tri-Band RF VCO	-109 dBc/Hz	-133 dBc/Hz	-3	180	0.37	LP6C	3A001.a.11.b	HMC840LP6CE
7300 - 8200	Microwave PLL+VCO	-101 dBc/Hz	-140 dBc/Hz	15	196	0.58	LP6C	3A001.a.11.b	HMC764LP6CE
7800 - 8800	Microwave PLL+VCO	-101 dBc/Hz	-140 dBc/Hz	13	193	0.61	LP6C	3A001.a.11.b	HMC765LP6CE
8450 - 9550	Microwave PLL+VCO	-107 dBc/Hz	-138 dBc/Hz	12	93	0.30	LP6C	3A001.a.11.b	HMC767LP6CE
9050 - 10150	Microwave PLL+VCO	-106 dBc/Hz	-140 dBc/Hz	12	82	0.28	LP6C	3A001.a.11.b	HMC769LP6CE
9600 - 10800	Microwave PLL+VCO	-106 dBc/Hz	-140 dBc/Hz	9	83	0.31	LP6C	3A001.a.11.b	HMC778LP6CE
11500 - 12500	Microwave PLL+VCO	-99 dBc/Hz	-134 dBc/Hz	10	181	0.81	LP6C	3A001.a.11.b	HMC783LP6CE
12400 - 13400	Microwave PLL+VCO	-98 dBc/Hz	-132 dBc/Hz	8	175	0.84	LP6C	3A001.a.11.b	HMC807LP6CE
Wideband Continuous Tuning									
25 - 3000	Wideband RF VCO	-114 dBc/Hz @ 2 GHz	-141 dBc/Hz @ 2 GHz	5	82 [1]	0.114 @ 2 GHz	LP6G	3A001.a.11.b	HMC830LP6GE
25 - 6000	Wideband RF VCO	-114 dBc/Hz @ 2 GHz	-135 dBc/Hz @ 4 GHz	-4	82 [1]	0.22 @ 4 GHz	LP6G	3A001.a.11.b	HMC833LP6GE
45 - 1050 1400 - 2100 2800 - 4200 Fo	Wideband RF VCO	-108 dBc/Hz @ 4 GHz	-134 dBc/Hz @ 4 GHz	4	82 [1]	0.229 @ 4 GHz	LP6G	3A001.a.11.b	HMC829LP6GE
45 - 1050 1400 - 2100 2800 - 4200 Fo 5600 - 8400	Wideband RF VCO	-108 dBc/Hz @ 4 GHz	-128 dBc/Hz @ 8 GHz	5 2 2 -10	82 [1]	0.46 @ 8 GHz	LP6G	3A001.a.11.b	HMC834LP6GE

[1] RMS Jitter Integration Bandwidth from 12 kHz to 20 MHz

VOLTAGE CONTROLLED OSCILLATORS* - VCOs with Buffer Amplifiers & Wideband VCOs

Fo Frequency (GHz)	Function	Fo Output Power (dBm)	10 kHz SSB Phase Noise (dBc/Hz)	100 kHz SSB Phase Noise (dBc/Hz)	Bias Supply	Package	ECCN Code	Part Number
2.05 - 2.25	VCO with Buffer	3.5	-89	-112	+3V @ 35 mA	LP4	EAR99	HMC384LP4E
2.25 - 2.5	VCO with Buffer	4.5	-89	-115	+3V @ 35 mA	LP4	EAR99	HMC385LP4E
2.6 - 2.8	VCO with Buffer	5	-88	-115	+3V @ 35 mA	LP4	EAR99	HMC386LP4E
2.75 - 3.0	VCO with Buffer	4.5	-89	-114	+3V @ 37 mA	LP4	EAR99	HMC416LP4E
3.15 - 3.4	VCO with Buffer	4.9	-88	-113	+3V @ 39 mA	LP4	EAR99	HMC388LP4E
3.35 - 3.55	VCO with Buffer	4.7	-89	-112	+3V @ 41 mA	LP4	EAR99	HMC389LP4E
3.55 - 3.9	VCO with Buffer	4.7	-87	-112	+3V @ 42 mA	LP4	EAR99	HMC390LP4E
3.9 - 4.45	VCO with Buffer	5	-81	-106	+3V @ 30 mA	LP4	EAR99	HMC391LP4E
4.45 - 5.0	VCO with Buffer	4	-79	-105	+3V @ 30 mA	LP4	EAR99	HMC429LP4E
5.0 - 5.5	VCO with Buffer	2	-80	-103	+3V @ 27 mA	LP4	EAR99	HMC430LP4E
5.5 - 6.1	VCO with Buffer	2	-80	-102	+3V @ 27 mA	LP4	EAR99	HMC431LP4E
5.8 - 6.8	VCO with Buffer	10	-82	-105	+3V @ 100 mA	MS8G	EAR99	HMC358MS8GE
6.1 - 6.72	VCO with Buffer	4.5	-73	-101	+3V @ 31 mA	LP4	EAR99	HMC466LP4E

VOLTAGE CONTROLLED OSCILLATORS* - VCOs with Buffer Amplifiers & Wideband VCOs

Fo Frequency (GHz)	Function	Fo Output Power (dBm)	10 kHz SSB Phase Noise (dBc/Hz)	100 kHz SSB Phase Noise (dBc/Hz)	Bias Supply	Package	ECCN Code	Part Number
6.8 - 7.4	VCO with Buffer	11	-80	-106	+3V @ 80 mA	LP4	EAR99	HMC505LP4E
7.1 - 7.9	VCO with Buffer	14	-80	-101	+3V @ 85 mA	LP4	EAR99	HMC532LP4E
7.8 - 8.7	VCO with Buffer	14	-80	-103	+3V @ 77 mA	LP4	EAR99	HMC506LP4E
8.6 - 10.2	VCO with ÷4	18	-70	-100	+5V @ 220 mA	LP5	3A001.a.11.b	HMC734LP5E
10.5 - 12.2	VCO with ÷4	17	-75	-100	+5V @ 220 mA	LP5	3A001.a.11.b	HMC735LP5E
13.2 - 13.5	VCO with ÷8	-8	-83	-110	+5V @ 230 mA	QS16G	3A001.a.11.b	HMC401QS16GE
14.0 - 15.0	VCO with ÷8	6	-75	-110	+5V @ 260 mA	QS16G	3A001.a.11.b	HMC398QS16GE
23.8 - 24.8	VCO with ÷16	12	-70	-95	+5V @ 220 mA	LP4	3A001.a.11.b	HMC533LP4E
4 - 8	Wideband VCO	5	-75	-100	+5V @ 55 mA	LC4B	EAR99	HMC586LC4B
5 - 10	Wideband VCO	5	-65	-95	+5V @ 55 mA	LC4B	EAR99	HMC587LC4B
6 - 12	Wideband VCO	1	-65	-95	+5V @ 57 mA	LC4B	EAR99	HMC732LC4B
8 - 12.5	Wideband VCO	5	-65	-93	+5V @ 55 mA	LC4B	EAR99	HMC588LC4B
10 - 20	Wideband VCO	3	-60	-90	+5V @ 70 mA	LC4B	EAR99	HMC733LC4B

* HMC VCOs integrate resonator, negative resistance generator and tuning varactor circuits on-chip. No external components are required.

VOLTAGE CONTROLLED OSCILLATORS WITH Fo/2 OUTPUT

Fo Frequency (GHz)	Fo/2 Frequency (GHz)	Function	Fo Output Power (dBm)	10 kHz SSB Phase Noise (dBc/Hz)	100 kHz SSB Phase Noise (dBc/Hz)	Bias Supply	Package	ECCN Code	Part Number
VCOs with Fo/2									
6.65 - 7.65	3.325 - 3.825	VCO with Fo/2	13	-90	-115	+5V @ 230 mA	LP5	EAR99	HMC507LP5E
7.3 - 8.2	3.65 - 4.1	VCO with Fo/2	15	-90	-116	+5V @ 240 mA	LP5	EAR99	HMC508LP5E
7.8 - 8.8	3.9 - 4.4	VCO with Fo/2	13	-90	-115	+5V @ 250 mA	LP5	EAR99	HMC509LP5E
9.05 - 10.15	4.525 - 5.075	VCO with Fo/2	13	-88	-115	+5V @ 265 mA	LP5	EAR99	HMC511LP5E
14.5 - 15.0	7.25 - 7.5	VCO with Fo/2	9	-80	-105	+4.2V @ 150 mA	LP4	EAR99	HMC736LP4E
14.9 - 15.5	7.45 - 7.75	VCO with Fo/2	9	-80	-105	+4.2V @ 150 mA	LP4	EAR99	HMC737LP4E
VCOs with Fo/2 & ÷4									
8.45 - 9.55	4.225 - 4.775	VCO with Fo/2 & ÷4	13	-92	-116	+5V @ 315 mA	LP5	3A001.a.11.b	HMC510LP5E
9.5 - 10.8	4.75 - 5.4	VCO with Fo/2 & ÷4	11	-85	-110	+5V @ 350 mA	LP5	3A001.a.11.b	HMC530LP5E
9.6 - 10.8	4.8 - 5.4	VCO with Fo/2 & ÷4	9	-85	-111	+5V @ 330 mA	LP5	3A001.a.11.b	HMC512LP5E
10.43 - 11.46	5.215 - 5.73	VCO with Fo/2 & ÷4	7	-85	-110	+3V @ 275 mA	LP5	3A001.a.11.b	HMC513LP5E
10.6 - 11.8	5.3 - 5.9	VCO with Fo/2 & ÷4	11	-82	-110	+5V @ 350 mA	LP5	3A001.a.11.b	HMC534LP5E
11.1 - 12.4	5.55 - 6.2	VCO with Fo/2 & ÷4	9	-83	-110	+5V @ 350 mA	LP5	3A001.a.11.b	HMC582LP5E
11.17 - 12.02	5.585 - 6.01	VCO with Fo/2 & ÷4	7	-87	-110	+3V @ 275 mA	LP5	3A001.a.11.b	HMC514LP5E
11.5 - 12.5	5.75 - 6.25	VCO with Fo/2 & ÷4	10	-83	-110	+5V @ 200 mA	LP5	3A001.a.11.b	HMC515LP5E
11.5 - 12.8	5.75 - 6.4	VCO with Fo/2 & ÷4	11	-80	-110	+5V @ 350 mA	LP5	3A001.a.11.b	HMC583LP5E
12.4 - 13.4	6.2 - 6.7	VCO with Fo/2 & ÷4	8	-83	-110	+5V @ 260 mA	LP5	3A001.a.11.b	HMC529LP5E
12.5 - 13.9	6.25 - 6.95	VCO with Fo/2 & ÷4	10	-81	-110	+5V @ 330 mA	LP5	3A001.a.11.b	HMC584LP5E
13.6 - 14.9	6.8 - 7.45	VCO with Fo/2 & ÷4	7	-82	-110	+5V @ 260 mA	LP5	3A001.a.11.b	HMC531LP5E
14.25 - 15.65	7.125 - 7.825	VCO with Fo/2 & ÷4	9	-80	-107	+5V @ 350 mA	LP5	3A001.a.11.b	HMC632LP5E
VCOs with Fo/2 & ÷16									
20.9 - 23.9	10.45 - 11.95	VCO with Fo/2 & ÷16	9	-65	-95	+5V @ 200 mA	LP4	3A001.a.11.b	HMC738LP4E
23.8 - 26.8	11.9 - 13.4	VCO with Fo/2 & ÷16	8	-64	-93	+5V @ 200 mA	LP4	3A001.a.11.b	HMC739LP4E


PHASE LOCKED OSCILLATOR

Fo Frequency (GHz)	Function	Fo Output Power (dBm)	10 kHz SSB Phase Noise (dBc/Hz)	100 kHz SSB Phase Noise (dBc/Hz)	Bias Supply	Package	ECCN Code	Part Number
14.7 - 15.4	Phase Locked Oscillator	9	-80	-110	+5V @ 340 mA +12V @ 28 mA	LP4	3A001.a.11.b	HMC535LP4E

for LO Generation Applications

HITTITE'S HIGH FREQUENCY LO SOURCE ALTERNATIVES


PLL & VCO CHIPSET

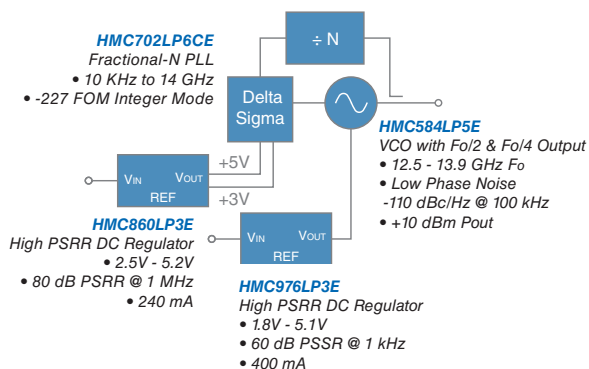

**Improves VCO Phase Noise
up to 14 dB @ 100 kHz Offset**


Contact Us: PLL@hittite.com

PLL WITH INTEGRATED VCO IC

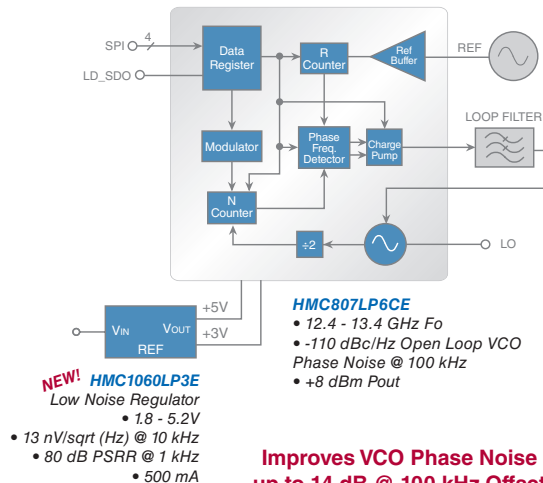


**Improves VCO Phase Noise
up to 14 dB @ 100 kHz Offset**

KA BAND PHASE LOCKED OSCILLATOR FEATURING HITTITE'S DC POWER CONDITIONING & FREQUENCY GENERATION COMPONENTS

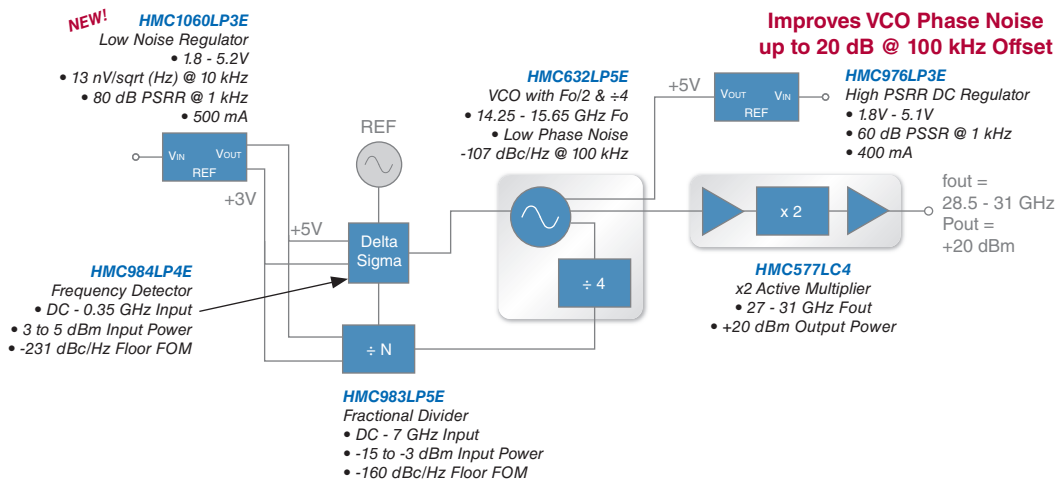


USING HMC1044LP3E AS AN LO HARMONIC FILTER TO IMPROVE MODULATOR/DEMODULATOR SIDEBAND/IMAGE REJECTION

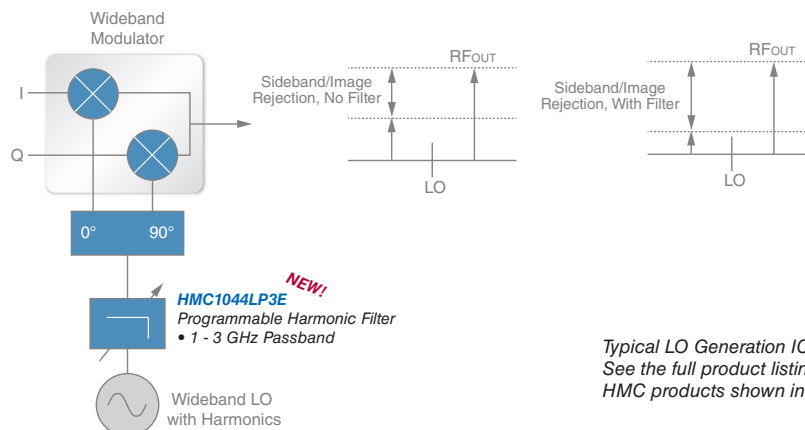

Typical LO Generation IC applications are illustrated.
See the full product listing for alternatives to the select
HMC products shown in each functional block.

Robust, High Performance RF to Light Solutions

Our hermetic module product line spans a wide range of popular product types including amplifiers, attenuators, DROs, high speed digital logic, frequency multipliers, MicroSynth® integrated synthesizers, mixers, phase shifters, prescalers, SDLVAs, switches & VCOs. Utilizing our standard MMIC products, we take advantage of our world-class design, manufacturing and quality expertise. Hittite can also up-screen modules for high-reliability/military specification applications. Contact us to discuss your custom module requirements.

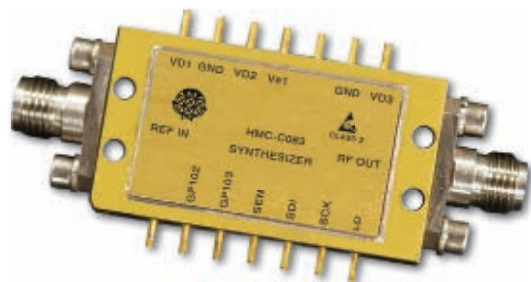

Features:

- ◆ Off-The-Shelf Availability
- ◆ Hermetically Sealed
- ◆ Internal DC Power Regulation
- ◆ Field Replaceable Connectors
- ◆ Military & Space Upscreening
- ◆ Customization Offered

AMPLIFIERS

Frequency (GHz)	Function	Gain (dB)	OIP3 (dBm)	NF (dB)	P1dB (dBm)	Bias Supply	Package / Connector	ECCN Code	Part Number
1 - 12	Low Noise	16	30	1.8	16	+6V @ 60 mA	C-10B / SMA	EAR99	HMC-C059
1.8 - 4.2	Low Noise	26	26	0.7	15.5	+8V @ 112 mA	C-10 / SMA	EAR99	HMC-C045
5 - 9	Low Noise	22.5	25	1.75	15	+12V @ 105 mA	C-10 / SMA	EAR99	HMC-C048
29 - 36	Low Noise	20	22	2.9	11	+3V @ 80 mA	C-10 / 2.92 mm	3A001.b.4.c	HMC-C027
2 - 20	Wideband LNA	15	25	2.5	14	+12V @ 65 mA	C-1 / SMA	EAR99	HMC-C001
2 - 20	Wideband LNA	14	26	2	18	+12V @ 60 mA	C-2 / SMA	EAR99	HMC-C002
2 - 20	Wideband LNA	14	27	2	16	+8V @ 75 mA	C-2B / SMA	EAR99	HMC-C022
7 - 17	Wideband LNA	22	25	2	14	+8V @ 93 mA	C-1 / SMA	EAR99	HMC-C016
17 - 27	Wideband LNA	18	25	3	14	+8V @ 96 mA	C-1B / 2.92 mm	EAR99	HMC-C017
0.01 - 20	Wideband Driver	16	33	3	23	+12V @ 195 mA	C-3 / SMA	3A001.b.4.f	HMC-C004
0.01 - 20	Wideband Driver	15	30	3	23	+12V @ 225 mA	C-3B / SMA	3A001.b.4.f	HMC-C024
2 - 35	Wideband Driver	12	29	3	18	+11V @ 92 mA	C-10 / 2.92 mm	3A001.b.4.c	HMC-C038
0.01 - 6.0	Single Stage Power Amplifier, 1 Watt	13	40	5	29.5	-5V @ 5 mA +15V @ 450 mA	C-17 / SMA	EAR99	HMC-C074
0.01 - 6.0	Two Stage Power Amplifier, 1 Watt	24	42	5	29.5	-5V @ 5 mA +15V @ 740 mA	C-17 / SMA	EAR99	HMC-C075
0.01 - 15	Wideband Power Amplifier, 1/2 Watt	12	36	4	28	+11V @ 360 mA	C-10B / SMA	3A001.b.4.f	HMC-C036
0.01 - 15	Wideband Power Amplifier, 1/2 Watt	12	36	4	28	+11V @ 360 mA	C-12 / SMA	3A001.b.4.f	HMC-C037
2 - 20	Wideband Power Amplifier	15	34	4	26	+12V @ 310 mA	C-2 / SMA	3A001.b.4.f	HMC-C003
2 - 20	Wideband Power Amplifier	15	34	4	26	+12V @ 310 mA	C-2B / SMA	3A001.b.4.f	HMC-C023
2 - 20	Wideband Power Amplifier	31	33	3	26	+12V @ 400 mA	C-3B / SMA	3A001.b.4.f	HMC-C026
17 - 24	Wideband Power Amplifier	22	33	3.5	24	+8V @ 250 mA	C-10 / 2.92 mm	EAR99	HMC-C020
21 - 31	Wideband Power Amplifier	15	32	5	24	+8V @ 215 mA	C-10 / 2.92 mm	3A001.b.4.c	HMC-C021
0.8 - 2.0	Power Amplifier, 10 Watt	43	56	12	40	+12V @ 6.5A	C-7 / SMA	EAR99	HMC-C013

AMPLIFIERS - Low Phase Noise

Frequency (GHz)	Function	Gain / NF (dB)	OIP3 (dBm)	10 kHz Phase Noise (dBc/Hz)	P1dB / Psat (dBm)	Bias Supply	Package / Connector	ECCN Code	Part Number
1.5 - 5.0	Low Phase Noise	14 / 4.5	26.5	-171	17 / 22	+7V @ 170 mA	C-16 / SMA	EAR99	HMC-C077
2 - 18	Low Phase Noise	13.5 / 5	22.5	-160	15 / 18.5	+5V @ 80 mA	C-1 / SMA	EAR99	HMC-C050
3 - 8	Low Phase Noise	9 / 6	33	-168	22 / 25	+7V @ 300 mA	C-16 / SMA	EAR99	HMC-C079
6 - 12	Low Phase Noise	11 / 4.5	34	-176	20 / 22	+7V @ 170 mA	C-16 / SMA	EAR99	HMC-C072
7 - 11	Low Phase Noise	9 / 6	33	-170	22 / 25	+7V @ 300 mA	C-16 / SMA	EAR99	HMC-C076

ATTENUATORS - Analog & Digital

Frequency (GHz)	Function	Loss (dB)	Attenuation Range (dB)	IIP3 (dBm)	Control Input (Vdc)	Package / Connector	ECCN Code	Part Number
DC - 20	Analog VVA	5.5	35	10	-5	C-10 / SMA	EAR99	HMC-C053
DC - 13	6-Bit Digital, Serial Control	3.6	0.5 to 31.5	32	Serial/CMOS	C-6 / SMA	EAR99	HMC-C018
DC - 13	6-Bit Digital	3.2	0.5 to 31.5	38	0 / +5V	C-6 / SMA	EAR99	HMC-C025

DIELECTRIC RESONATOR OSCILLATORS (DRO)

Frequency (GHz)	Function	Output Power (dBm)	10 kHz SSB Phase Noise (dBc/Hz)	100 kHz SSB Phase Noise (dBc/Hz)	Frequency Drift (ppm/°C)	Bias Supply	Package	ECCN Code	Part Number
8.0 - 8.3	Dielectric Resonator Oscillator	14.5	-122	-140	2	+6 to +15V @ 125 mA	C-18 / SMA	EAR99	HMC-C200

Robust, High Performance RF to Light Solutions

FREQUENCY DIVIDERS (PRESCALERS)

Input Freq. (GHz)	Function	Input Power (dBm)	Output Power (dBm)	100 kHz SSB Phase Noise (dBc/Hz)	Bias Supply	Package / Connector	ECCN Code	Part Number
DC - 18	Divide-by-2	-15 to +10	-4	-150	+5V @ 75 mA	C-1 / SMA	3A001.a.11.b	HMC-C005
DC - 18	Divide-by-4	-15 to +10	-4	-150	+5V @ 93 mA	C-1 / SMA	3A001.a.11.b	HMC-C006
0.5 - 8	Divide-by-5	-15 to +10	-1	-155	+5V @ 80 mA	C-1 / SMA	3A001.a.11.b	HMC-C039
DC - 18	Divide-by-8	-15 to +10	-4	-150	+5V @ 98 mA	C-1 / SMA	3A001.a.11.b	HMC-C007
0.5 - 17	Divide-by-10	-15 to +10	-1	-155	+5V @ 152 mA	C-1 / SMA	3A001.a.11.b	HMC-C040

FREQUENCY MULTIPLIERS - Active

Input Freq. (GHz)	Function	Output Freq. (GHz)	Input Power (dBm)	Output Power (dBm)	100 kHz SSB Phase Noise (dBc/Hz)	Package / Connector	ECCN Code	Part Number
3 - 5	x2 Active	6 - 10	3	17	-140	C-10 / SMA	EAR99	HMC-C031
9.0 - 14.5	x2 Active	18 - 29	3	16	-132	C-10 / 2.92 mm	EAR99	HMC-C032
12.0 - 16.5	x2 Active	24 - 33	3	17	-132	C-10 / 2.92 mm	EAR99	HMC-C033
16 - 23	x2 Active	32 - 46	3	13	-130	C-10 / 2.92 mm	EAR99	HMC-C034
4.0 - 10.5	x2 Active	8 - 21	6	14	-142	C-10 / SMA	EAR99	HMC-C056

HIGH SPEED DIGITAL LOGIC

Data / Clock Rate (Gbps / GHz)	Function	Rise / Fall Time (ps)	Deterministic Jitter (ps)	Differential Output Swing (Vp-p)	DC Power (mW)	Vee Power Supply (Vdc)	Package / Connector	ECCN Code	Part Number
50 / 30	1:2 Fanout Buffer	9.5 / 11	2	0.5	455	-3.3	C-13 / 1.85 mm	3A001.a.11.b	HMC-C062
50 / 25	AND / NAND / OR / NOR	9 / 10	2	0.5	560	-3.3	C-13 / 1.85 mm	3A001.a.11.b	HMC-C065
43 / 43	D-Type Flip-Flop	9 / 10	1.5	0.5	580	-3.3	C-13 / 1.85 mm	3A001.a.11.b	HMC-C060
50 / 25	D-Type Flip-Flop Double Edge Triggered	9 / 11	1.5	0.5	690	-3.3	C-13 / 1.85 mm	3A001.a.11.b	HMC-C061
50 / 25	XOR / XNOR	6.5 / 10	2	0.5	550	-3.3	C-13 / 1.85 mm	3A001.a.11.b	HMC-C064

I/Q MIXERS

RF / LO Frequency (GHz)	Function	IF Frequency (GHz)	Conversion Gain (dB)	Image Rejection (dB)	IIP3 (dBm)	Package / Connector	ECCN Code	Part Number
4 - 8.5	I/Q Mixer / IRM	DC - 3.5	-7.5	35	23	C-4 / SMA	EAR99	HMC-C009
6 - 10	I/Q Mixer / IRM	DC - 3.5	-7.5	35	25	C-4 / SMA	EAR99	HMC-C041
8.5 - 13.5	I/Q Mixer / IRM	DC - 2	-8	28	25	C-4 / SMA	EAR99	HMC-C042
11 - 16	I/Q Mixer / IRM	DC - 3.5	-9	30	28	C-4 / SMA	EAR99	HMC-C043
15 - 23	I/Q Mixer / IRM	DC - 3.5	-8	30	25	C-4 / 2.92 mm & SMA	EAR99	HMC-C044
20 - 31	I/Q Mixer / IRM	DC - 4.5	-10	24	22.5	C-4B / 2.92 mm & SMA	EAR99	HMC-C046
30 - 38	I/Q Mixer / IRM	DC - 3.5	-10.5	15	19	C-4 / 2.92 mm & SMA	EAR99	HMC-C047

MIXERS

RF Frequency (GHz)	Function	IF Frequency (GHz)	Conversion Gain (dB)	LO/RF Isolation (dB)	IIP3 (dBm)	Package / Connector	ECCN Code	Part Number
7 - 14	+13 LO, DBL-BAL	DC - 5	-7	48	20	C-11 / SMA	EAR99	HMC-C049
11 - 20	+13 LO, DBL-BAL	DC - 6	-7	43	18	C-11 / 2.92 mm & SMA	EAR99	HMC-C051
16 - 32	+13 LO, DBL-BAL	DC - 8	-8	35	19	C-11 / 2.92 mm & SMA	EAR99	HMC-C014
23 - 37	+13 LO, DBL-BAL	DC - 13	-9	35	19	C-11 / 2.92 mm & SMA	EAR99	HMC-C035
24 - 38	+13 LO, DBL-BAL	DC - 8	-8.5	35	20	C-11 / 2.92 mm & SMA	EAR99	HMC-C015

PHASE SHIFTERS - Analog

Frequency (GHz)	Function	Insertion Loss (dB)	Phase Range (deg)	2nd harmonic Pin = 10 dBm (dBc)	Control Voltage Range (Vdc)	Package / Connector	ECCN Code	Part Number
6 - 15	Analog	7	750° @ 6 GHz 450° @ 15 GHz	40	0V to +5V	C-1 / SMA	EAR99	HMC-C010

PHASE SHIFTERS - Digital

Frequency (GHz)	Function	Insertion Loss (dB)	Phase Range (deg)	IIP3 (dBm)	Control Voltage Range (Vdc)	Package / Connector	ECCN Code	Part Number
8 - 12	4-Bit Digital	7	22.5 to 360	38	0V to +5V	C-6 / SMA	EAR99	HMC-C055

SDLVAs - Successive Detection Log Video Amplifier

Frequency (GHz)	Function	Dynamic Range (dB)	RSSI Slope (mV / dB)	RF Threshold Level (dBm)	Bias Supply	Package / Connector	ECCN Code	Part Number
1 - 20	SDLVA	59	14	-67	+12V @ 86 mA	C-10 / 2.92 mm	EAR99	HMC-C052
2 - 20	SDLVA with Limited RF Output	50	45	-45	+12V @ 370 mA -5V @ 20 mA	C-21 / SMA	EAR99	HMC-C078

SWITCHES - SPST, SPDT & SP4T

Frequency (GHz)	Function	Insertion Loss (dB)	Isolation (dB)	Input P1dB (dBm)	Switching Speed (ns)	Package / Connector	ECCN Code	Part Number
DC - 20	SPST, Hi Isolation	3	100	23	8.5	C-9 / SMA	EAR99	HMC-C019
DC - 18	SPDT, Hi Isolation	2	55	27	3	C-14 / SMA	EAR99	HMC-C058
DC - 20	SPDT, Hi Isolation	2	40	23	5	C-5 / SMA	EAR99	HMC-C011
DC - 20	SP4T, Hi Isolation	3	40	24	14	C-15 / SMA	EAR99	HMC-C071

SYNTHESIZED MODULES - MicroSynth®


Frequency (GHz)	Function	Min. Step Size Resolution (Hz)	Reference Frequency (MHz)	SSB Phase Noise @ 100 kHz Offset (dBc/Hz)	Output Power (dBm)	Bias Supply	Package	ECCN Code	Part Number
2 - 6	MicroSynth® Synthesizer	0.6	10	-93	17	+20V @ 7 mA +6V @ 330 mA	C-20 / SMA	EAR99	HMC-C083
5.5 - 10.5	MicroSynth® Synthesizer	1.2	10	-92	21	+20V @ 20 mA +6V @ 300 mA +3.6V @ 100 mA	C-20 / SMA	EAR99	HMC-C070

VOLTAGE CONTROLLED OSCILLATORS

Frequency (GHz)	Function	Output Power (dBm)	10 kHz SSB Phase Noise (dBc/Hz)	100 kHz SSB Phase Noise (dBc/Hz)	Bias Supply	Package / Connector	ECCN Code	Part Number
4 - 8	Wideband VCO	20	-75	-95	+12V @ 185 mA	C-1 / SMA	EAR99	HMC-C028
5 - 10	Wideband VCO	20	-64	-93	+12V @ 195 mA	C-1 / SMA	EAR99	HMC-C029
8 - 12.5	Wideband VCO	21	-59	-83	+12V @ 195 mA	C-1 / SMA	EAR99	HMC-C030
38.4 - 43.2	VCO	13	-74	-98	+5V @ 350 mA	C-19 / 2.4 mm	EAR99	HMC-C073

Hittite Microwave Can Offer Any Of Our Die Or SMT IC Products In A Connectorized Module.
Full Specifications for Each Product Are Available at www.hittite.com.


MILITARY RADAR RECEIVER SOLUTION

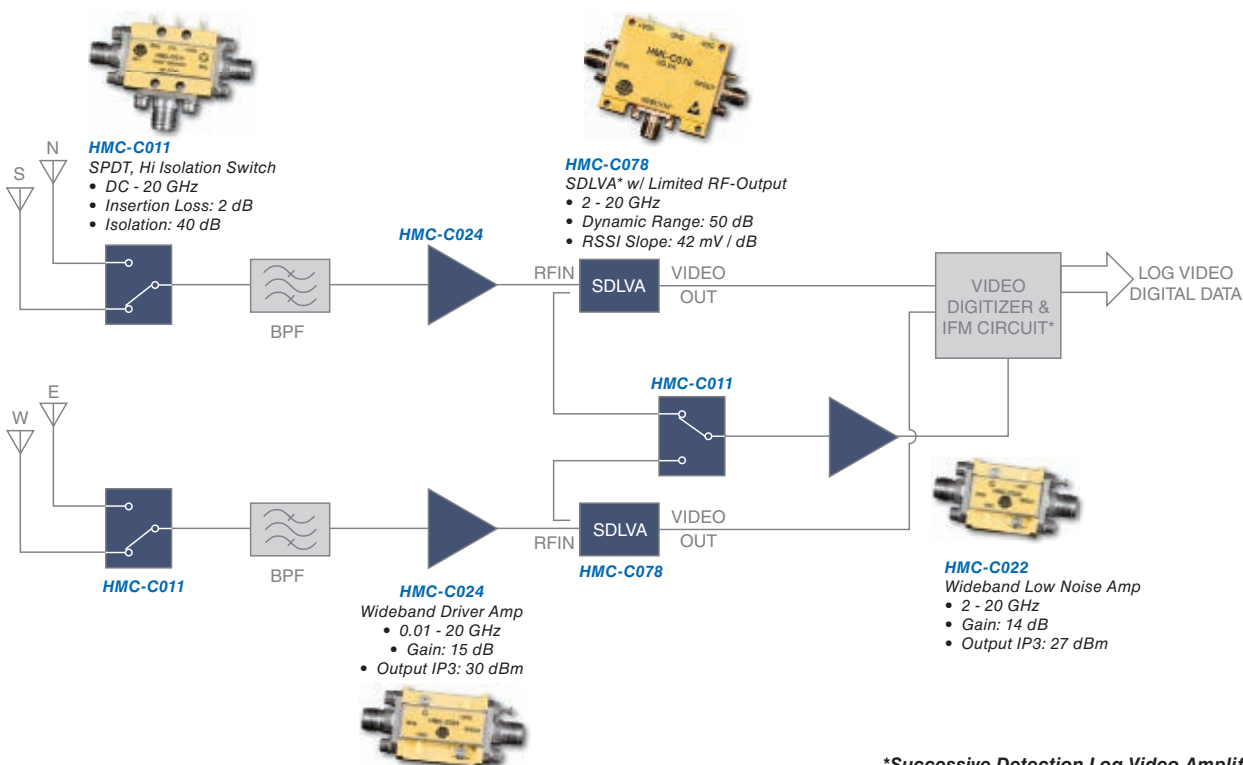


*Successive Detection Log Video Amplifier

Robust, High Performance RF to Light Solutions


ULTRA LOW NOISE PHASE LOCKED OSCILLATOR (PLO), TEST EQUIPMENT SOLUTION

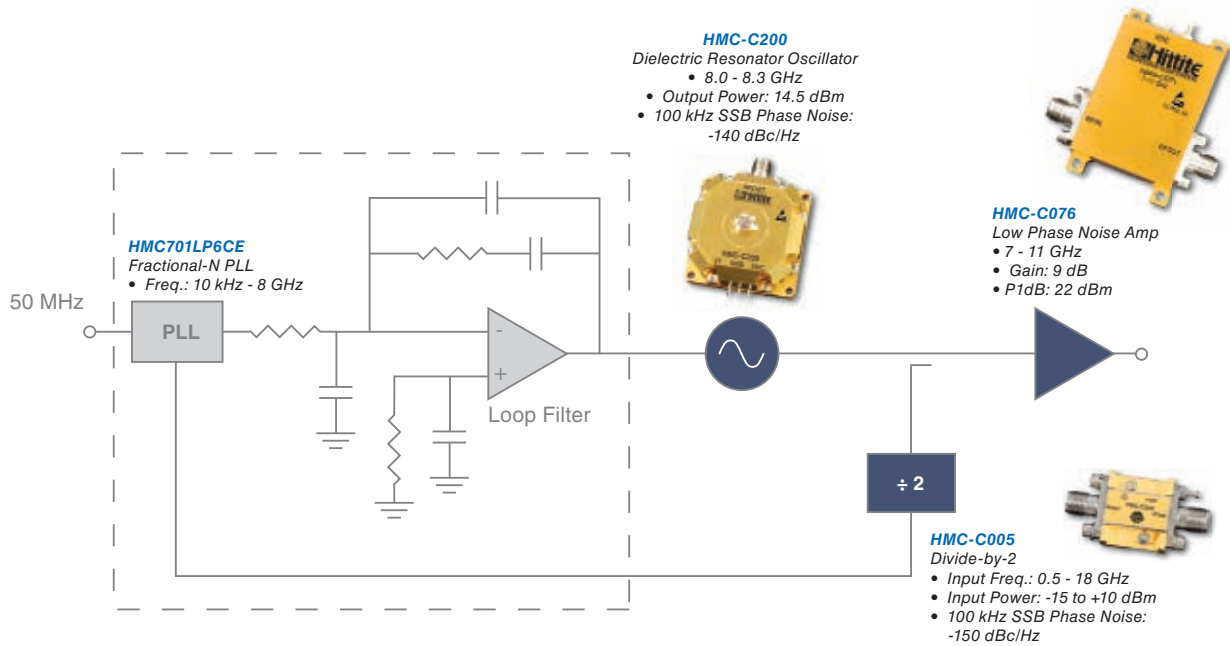

X-BAND MILITARY DOWNCONVERTER SOLUTION

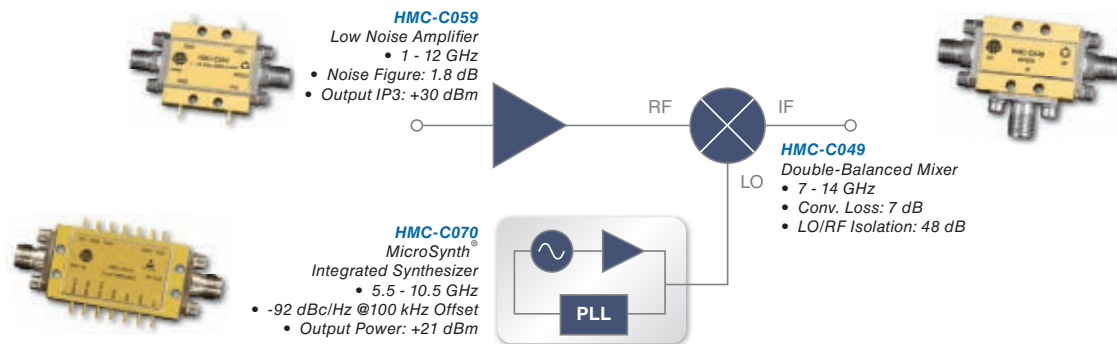


PULSED 0.5W C-BAND MILITARY & TEST EQUIPMENT SYNTHESIZER SOLUTION

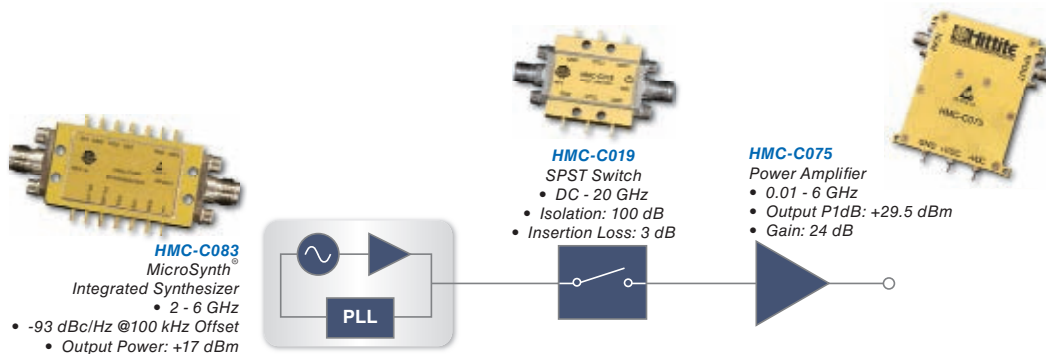

Expanded Signal Generator Family to 70 GHz

\$3,998

HMC-T2000
700 MHz to 8 GHz

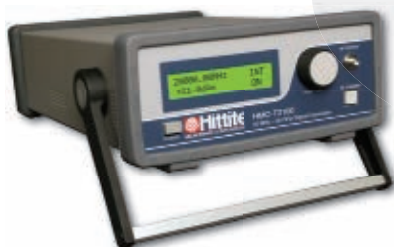

\$7,998

HMC-T2100
10 MHz to 20 GHz



\$14,998

HMC-T2220B
10 MHz to 20 GHz
Battery Powered

Our Signal Generator Products

- ◆ **Wide Frequency Range:** 10 MHz to 70 GHz
- ◆ **Versatile:** High Output Power Simplifies Test Set-Ups
- ◆ **Efficient:** Fast Frequency Switching Below 500 μ s
- ◆ **Flexible:** Manual or USB / GPIB / Ethernet Control



\$9,998

HMC-T2220
10 MHz to 20 GHz

Visit Us at www.tm-hittite.com!

HMC-T2240
10 MHz to 40 GHz



\$19,498

Performance

- ◆ High Output Power: +20 dBm @ 40 GHz
- ◆ Excellent 10 GHz SSB Phase Noise: -98 dBc/Hz @ 10 kHz Offset
- ◆ Spurious: < -65 dBc @ 10 GHz
- ◆ Resolution: 0.1 dB & 1 Hz
- ◆ Fast Switching: 500 μ s

HMC-T2270
10 MHz to 70 GHz



\$34,998

Performance


- ◆ Output Power: +3dBm @ 70 GHz
- ◆ Excellent 70 GHz SSB Phase Noise: -79 dBc/Hz @ 10 kHz Offset
- ◆ Spurious: < -65 dBc @ 10 GHz
- ◆ Resolution: 0.1 dB & 1 Hz
- ◆ Fast Switching: 500 μ s

Expanded Signal Generator Family to 40 GHz


SIGNAL GENERATORS - Precise RF Signal Generation for ATE & Lab Environments

Frequency (GHz)	Function	Frequency Resolution	Maximum Power Output (dBm)	100 kHz SSB Phase Noise (dBc/Hz)	Spurious (dBc)	Switching Speed Steps (μ s)	Package	ECCN Code	Part Number
0.7 - 8.0	Signal Generator	1 MHz	+17 @ 1 GHz +10 @ 8 GHz	-87 @ 4 GHz	< -45	200	Rack Mountable / Benchtop	EAR99	HMC-T2000
0.01 - 20	Signal Generator	10 kHz	+25 @ 1 GHz +22 @ 20 GHz	-93 @ 10 GHz	< -27	300	Rack Mountable / Benchtop	EAR99	HMC-T2100
0.01 - 20	Portable Signal Generator	1 Hz	+28 @ 1 GHz +24 @ 20 GHz	-99 @ 10 GHz	< -57	300	Portable / Benchtop	EAR99	HMC-T2220B
0.01 - 20	Signal Generator	1 Hz	+28 @ 1 GHz +24 @ 20 GHz	-99 @ 10 GHz	< -57	300	Rack Mountable / Benchtop	EAR99	HMC-T2220
0.01 - 40	Signal Generator	1 Hz	+30 @ 1 GHz +20 @ 40 GHz	-99 @ 10 GHz	< -52	500	Rack Mountable / Benchtop	EAR99	HMC-T2240
0.01 - 70	Signal Generator	1 Hz	+29 @ 1 GHz +3 @ 70 GHz	-118 @ 1 GHz -79 @ 70 GHz	< -46	500	Rackmountable / Benchtop	3A002.d.3.f	HMC-T2270

TWO TONE THIRD ORDER INTERCEPT TEST SET-UP

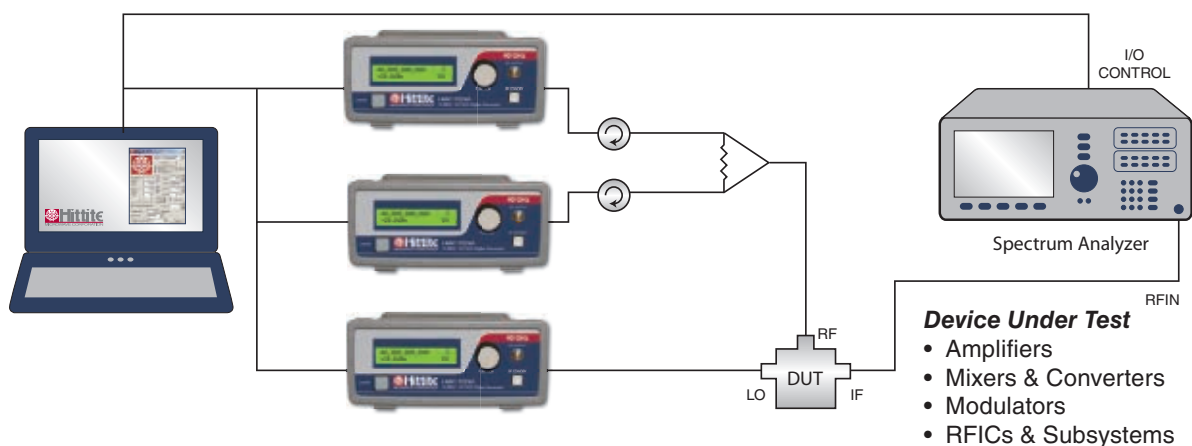

EFFICIENT MIXER CONVERSION LOSS, ISOLATION & MxN SPURIOUS TEST SET-UP

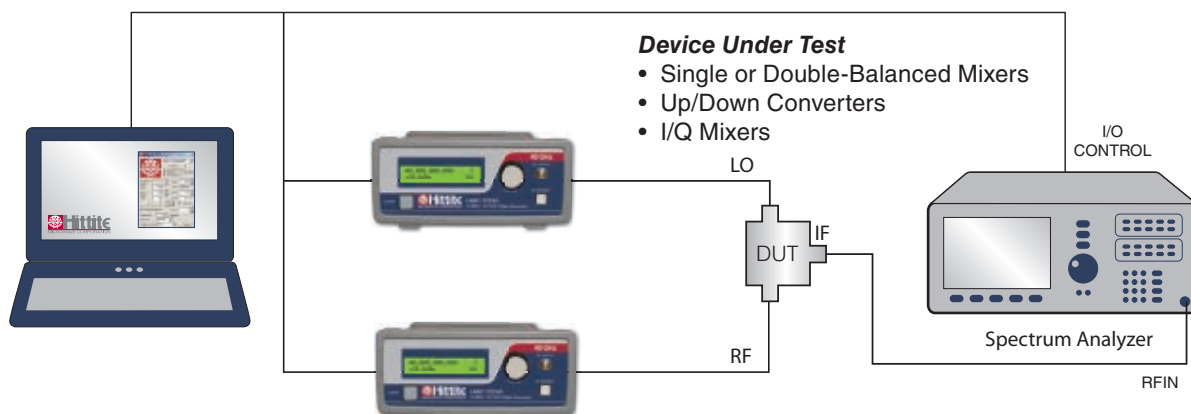


Contact Us Today with Your Custom Test Instrumentation Requirements at TE@hittite.com!

Visit our Instrument Web Site at www.tm-hittite.com.

MILITARY LEVEL COMPONENTS, MODULES & SUBSYSTEMS

- Class B screening on standard & custom product die and SMT packaging.
- Design, production & screening of highly integrated MIC sub-assemblies for major defense OEMs.
- Military & Space Upscreening to Customer Specifications.

Military Solution Inquiries: MIL@hittite.com

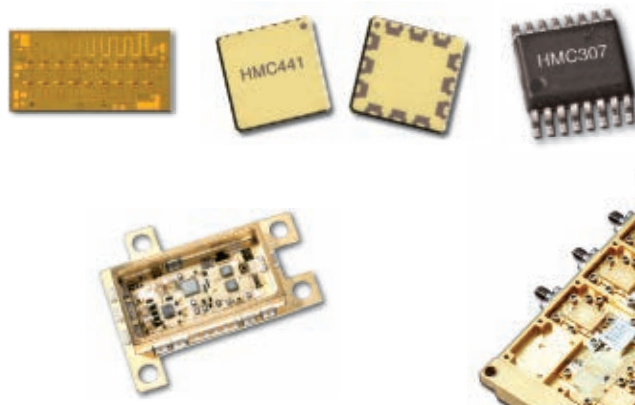

Class B Screening & Qualification

- VI to Method 2010B & 2017H
- Bond Pull & Die Shear Test
- Solderability Test
- High Temp Burn-In Test
- Vibration Stress Test
- Temp Cycle Stress Test
- Constant Acceleration Stress Test
- Fine & Gross Hermeticity Test
- Serialized Test Data
- ESD Characterization

SPACE LEVEL COMPONENTS, MODULES & SUBSYSTEMS

Class S Screening & Qualification

- VI to Methods 2010A & 2017K
- Temp Cycle Stress Test
- High Temp Burn-In & Life Test
- Wafer Lot Acceptance Test
- Bond Pull & Die Shear Test
- SEM Inspection
- Metal & Glass Thicknesses
- Serialized Test Data
- Qualification Report

- Class S screening on standard & custom product die and SMT packaging.
- Military & Space Upscreening to Customer Specifications.
- Qualified by major spacecraft OEMs worldwide.
- Over 45,000 S-Level components currently operational on dozens of commercial, scientific & military spacecraft.

Space Solution Inquiries: SPACE@hittite.com



FET Channel SEM




Serialized Die
in GEL-PAK



Hermetic
SMT Package



Hermetic Modules



Chip (Die)

**Contact Us Today With Your High Reliability
Mixed-Signal RF, Microwave & Millimeterwave Requirements!**

Evaluation Boards & ICs Reduce Design Cycle Time

7 DESIGNER'S KITS AVAILABLE TO CHOOSE FROM!





- ◆ Gain Blocks DC - 6 GHz, HMC-DK001
- ◆ Linear Driver Amplifiers 0.4 - 2.5 GHz, HMC-DK002
- ◆ High IP3 Mixers 0.45 - 4.0 GHz, HMC-DK003
- ◆ Digital Attenuators DC - 6 GHz, HMC-DK004
- ◆ SPDT Switches DC - 12 GHz, HMC-DK005
- ◆ Passive Attenuator Chips DC - 50 GHz, HMC-DK006
- ◆ Serial/Parallel USB Interface Kit, HMC-DK008

Design engineers can order pre-packaged MMIC Designer's Kits which enable them to quickly assess which Hittite product is the best choice for their application. The end result is a design that goes to layout more quickly and with fewer subsequent changes.

Each Hittite Designer's Kit contains an assembled & tested connectorized evaluation board, 5 to 10 ICs of each part and the latest Hittite CD-ROM catalog.

Designer's Kit	Kit Contents			
	ICs		Eval Boards	
Gain Blocks DC - 6 GHz HMC-DK001	HMC474MP86E HMC476MP86E HMC313E HMC311ST89E HMC478MP86E HMC478ST89E	HMC479MP86E HMC479ST89E HMC481ST89E HMC480ST89E HMC481MP86E HMC482ST89E	104217 – HMC313E 110161 – HMC478ST89E 107490 – HMC481MP86E	
Linear Driver Amps 0.4 - 2.5 GHz HMC-DK002	HMC454ST89E HMC450QS16GE HMC413QS16GE	HMC452ST89E HMC453ST89E HMC457QS16GE	107749 – HMC454ST89E 108349 – HMC450QS16GE 105000 – HMC413QS16GE	108712 – HMC452ST89E 108718 – HMC453ST89E 106043 – HMC457QS16GE
Hi-IP3 Mixers 0.45 - 4.0 GHz HMC-DK003	HMC387MS8E HMC483MS8GE HMC399MS8E HMC316MS8E HMC400MS8E HMC485MS8GE	HMC402MS8E HMC214MS8E HMC478ST89E HMC481ST89E HMC480ST89E	110161 – HMC478ST89E 105188 – HMC485MS8GE	106334 – HMC399MS8E 101830 – HMC400MS8E
Digital Attenuators DC - 6 GHz HMC-DK004	HMC291E HMC468LP3E HMC274QS16E HMC271ALP4E HMC273MS10GE	HMC305ALP4E HMC306MS10E HMC470LP3E HMC472LP4E	103372 – HMC291E 107302 – HMC468LP3E 104976 – HMC274QS16E 108782 – HMC271ALP4E 103393 – HMC273MS10GE	108782 – HMC305AMS10E 103393 – HMC306MS10E 107006 – HMC470LP3E 107010 – HMC472LP4E
SPDT Switches DC - 12 GHz HMC-DK005	HMC221AE HMC284MS8GE HMC349MS8GE HMC232LP4E HMC544E	HMC595E HMC574MS8E HMC784MS8GE HMC536MS8GE	101675 – HMC221AE 107662 – HMC349MS8GE 107723 – HMC232LP4E	104124 – HMC574MS8E 104124 – HMC784MS8GE 105143 – HMC536MS8GE
Passive Attenuators DC - 50 GHz HMC-DK006	HMC650 HMC651 HMC652 HMC653 HMC654	HMC655 HMC656 HMC657 HMC658		
Serial/Parallel USB Interface Kit HMC-DK008	The HMC-DK008 Serial/Parallel Interface Designer's kit enables users to interface with Hittite's family of digital attenuators, interface and variable gain amplifiers.			
EKIT01-HMC6383	Programmable Direct Conversion Receiver, 700 to 3000 MHz. Hittite's HMC6383 features unparalleled receiver flexibility and industry leading performance			

Available Plastic, Ceramic, Hermetic SMT & Connectorized Module Packages

 MP86 "Micro-P" 5.21 x 5.08 x 1.57 mm	 SC70 2.15 x 2.1 x 0.9 mm	 SOT26 2.8 x 2.9 x 1.2 mm	 ST89 4.50 x 4.14 x 1.54 mm	 MS8 / MS8G 4.9 x 3.0 x 1.0 mm	 MS10 / MS10G 4.9 x 3.0 x 1.0 mm
 S8 / S8G 6.0 x 4.9 x 1.6 mm	 S14 6.0 x 8.7 x 1.6 mm	 LP2 "DFN" 2.0 x 2.0 x 1.0 mm	 LP3 "QFN" 3.0 x 3.0 x 1.0 mm	 LP4 / LP4B / LP4C "QFN" 4.0 x 4.0 x 1.0 mm	 LP5 "QFN" 5.0 x 5.0 x 1.0 mm
 LP6 / LP6C "QFN" 6.0 x 6.0 x 1.0 mm	 LP6H "QFN" 6.0 x 6.0 x 1.0 mm	 LP7D "QFN" 7.0 x 7.0 x 1.0 mm	 LP9 "QFN" 9.0 x 9.0 x 1.0 mm	 QS16 / QS16G 6.0 x 4.9 x 1.5 mm	 QS24 6.0 x 8.7 x 1.6 mm
 BGA 9.75 x 6.0 x 3.29 mm	 LC3 / LC3B / LC3C 3.0 x 3.0 x 1.0 / 1.45 mm	 LC4 / LC4B 4.0 x 4.0 x 1.0 / 1.2 mm	 LC5 5.0 x 5.0 x 1.0 mm	 LM1 / LM3 5.1 x 5.1 x 1.1 mm	 C8 7.4 x 5.1 x 2.4 mm
 G7 Hermetic 16.1 x 17.3 x 1.7 mm	 G8 Hermetic 10.2 x 4.6 x 1.8 mm	 G16 Hermetic 10.4 x 10.4 x 1.7 mm	 G32 Hermetic 16 x 16 x 1.96 mm	 LH250 Hermetic 6.35 x 6.35 x 1.27 mm	 LH5 Hermetic 5.0 x 5.0 x 1.0 mm
 C-1 / C-1B 35.31 x 17.78 x 7.38 mm	 C-2 / C-2B 38.1 x 17.78 x 7.38 mm	 C-3 / C-3B 40.89 x 17.78 x 7.38 mm	 C-4 41.66 x 36.32 x 8.50 mm	 C-5 41.66 x 26.8 x 8.79 mm	 C-6 45.34 x 17.27 x 8.50 mm
 C-9 44.45 x 21.59 x 8.76 mm	 C-10 / C-10B 46.63 x 21.59 x 8.50 mm	 C-11 41.66 x 26.8 x 8.64 mm	 C-12 107.6 x 43.0 x 43.0 mm	 C-13 39.43 x 47.12 x 11.42 mm	 C-14 41.91 x 29.85 x 9.65 mm
 C-15 59.69 mm DIA x 9.14 mm	 C-16 48.0 x 48.26 x 14.10 mm	 C-17 68.5 x 66.0 x 14.2 mm	 C-18 38.10 x 47.62 x 26.67 mm	 C-19 27.31 x 25.15 x 5.84 mm	 C-20 53.59 x 19.05 x 6.22 mm
 C-21 38.10 x 33.53 x 5.84 mm					

E or  = RoHS Compliant.

For more information on our "Green" component program, please contact earthfriendly@hittite.com for details on our RoHS Compliant products or see the RoHS Compliant Components link on our web site.

PART NUMBER INDEX

Part #	Page#	Part #	Page#	Part #	Page#	Part #	Page#	Part #	Page#
HMC128	15	HMC274QS16E	11	HMC380QS16GE	14	HMC462	10	HMC528LC4	13
HMC128G8	15	HMC276LP4E	19	HMC381LP6E	14	HMC462LP5E	10	HMC529LP5E	42
HMC129	15	HMC276QS24E	19	HMC383	9	HMC463	10	HMC530LP5E	42
HMC129G8	15	HMC277MS8E	15	HMC383LC4	9	HMC463LH250	10	HMC531LP5E	42
HMC129LC4	15	HMC284MS8GE	18	HMC384LP4E	41	HMC463LP5E	10	HMC532LP4E	42
HMC130	15	HMC285E	15	HMC385LP4E	41	HMC464	11	HMC533LP4E	42
HMC135	16	HMC286E	7	HMC386LP4E	41	HMC464LP5E	11	HMC534LP5E	42
HMC136	16	HMC287MS8E	19	HMC387MS8E	14	HMC465	10	HMC535LP4E	42
HMC137	16	HMC288MS8E	11	HMC388LP4E	41	HMC465LP5E	10	HMC536LP2E	18
HMC141 / 142	15	HMC290E	11	HMC389LP4E	41	HMC466LP4E	41	HMC536MS8GE	18
HMC141C8 / 142C8	15	HMC291E	11	HMC390LP4E	41	HMC467LP3E	11	HMC538LP4E	17
HMC141LH5	15	HMC292	15	HMC391LP4E	41	HMC468LP3E	11	HMC539LP3E	11
HMC143 / 144	15	HMC292LC3B	15	HMC392	7	HMC469MS8GE	8	HMC540LP3E	11
HMC144LC4	15	HMC292LM3C	15	HMC392LC4	7	HMC470LP3E	11	HMC541LP3E	11
HMC144LH5	15	HMC304MS8E	14	HMC392LH5	7	HMC471MS8GE	8	HMC542LP4E	12
HMC156	40	HMC305LP4E	11	HMC393MS8GE	19	HMC472LP4E	12	HMC543	17
HMC156C8	40	HMC306MS10E	11	HMC394LP4E	39	HMC473MS8E	11	HMC543LC4B	17
HMC158	40	HMC307QS16GE	11	HMC395	8	HMC474MP86E	8	HMC544E	18
HMC158C8	40	HMC308E	8	HMC396	8	HMC474SC70E	8	HMC545E	18
HMC168C8	15	HMC310MS8GE	7	HMC397	8	HMC475ST89E	8	HMC546LP2E	18
HMC170C8	15	HMC311LP3E	8	HMC398QS16GE	42	HMC476MP86E	8	HMC546MS8GE	18
HMC171C8	15	HMC311SC70E	8	HMC399MS8E	14	HMC476SC70E	8	HMC547LC3	18
HMC174MS8E	18	HMC311ST89E	8	HMC400MS8E	14	HMC478MP86E	8	HMC547LP3E	18
HMC175MS8E	15	HMC313E	8	HMC401QS16GE	42	HMC478SC70E	8	HMC548LP3E	7
HMC182S14E	19	HMC316MS8E	14	HMC402MS8E	14	HMC478ST89E	8	HMC549MS8GE	8
HMC183QS24E	19	HMC318MS8GE	7	HMC404	13	HMC479MP86E	8	HMC550E	18
HMC187MS8E	40	HMC320MS8GE	7	HMC405	8	HMC479ST89E	8	HMC551LP4E	14
HMC188MS8E	40	HMC321LP4E	19	HMC406MS8GE	9	HMC480ST89E	8	HMC552LP4E	14
HMC189MS8E	40	HMC322	19	HMC407MS8GE	9	HMC481MP86E	8	HMC553	15
HMC190MS8E	18	HMC322LP4E	19	HMC408LP3E	9	HMC481ST89E	8	HMC553LC3B	15
HMC194MS8E	18	HMC326MS8GE	8	HMC409LP4E	9	HMC482ST89E	8	HMC554	15
HMC197E	18	HMC327MS8GE	9	HMC410MS8GE	14	HMC483MS8GE	14	HMC554LC3B	15
HMC199MS8E	19	HMC329	15	HMC411MS8GE	15	HMC485MS8GE	14	HMC555	13
HMC203	15	HMC329LC3B	15	HMC412MS8GE	15	HMC486	9	HMC556	13
HMC204	40	HMC329LM3	15	HMC413QS16GE	9	HMC486LP5E	9	HMC557	15
HMC204C8	40	HMC331	40	HMC416LP4E	41	HMC487LP5E	9	HMC557LC4	15
HMC204MS8GE	40	HMC333E	14	HMC420QS16E	14	HMC488MS8GE	15	HMC558	15
HMC205	40	HMC334LP4E	14	HMC421QS16E	14	HMC489LP5E	9	HMC558LC3B	15
HMC207AMS8E	15	HMC335G16	11	HMC422MS8E	14	HMC490	7	HMC559	10
HMC208AMS8E	15	HMC336MS8GE	18	HMC423MS8E	14	HMC490LP5E	7	HMC560	15
HMC208MS8E	15	HMC337	16	HMC424	12	HMC491LP3E	7	HMC560LM3	15
HMC213MS8E	15	HMC338	16	HMC424G16	12	HMC492LP3E	39	HMC561	39
HMC214MS8E	14	HMC338LC3B	16	HMC424LH5	12	HMC493LP3E	39	HMC561LP3E	39
HMC215LP4E	14	HMC339	16	HMC424LP3E	12	HMC494LP3E	39	HMC562	10
HMC218MS8E	15	HMC340LP5E	15	HMC425	12	HMC495LP3E	16	HMC564	7
HMC219MS8E	15	HMC341	8	HMC425LP3E	12	HMC496LP3E	16	HMC564LC4	7
HMC220AMS8E	15	HMC341LC3B	8	HMC426MS8E	39	HMC497LP4E	16	HMC565	7
HMC220MS8E	15	HMC342	7	HMC427LP3E	19	HMC498	9	HMC565LC5	7
HMC221E	18	HMC342LC4	7	HMC429LP4E	41	HMC498LC4	9	HMC566	8
HMC224MS8E	18	HMC344	19	HMC430LP4E	41	HMC499	9	HMC566LP4E	8
HMC230MS8E	11	HMC344LC3	19	HMC431LP4E	41	HMC499LC4	9	HMC567LC5	13
HMC231G7	18	HMC344LH5	19	HMC432E	39	HMC500LP3E	16	HMC570	13
HMC232	18	HMC344LP3E	19	HMC433E	39	HMC504LC4B	7	HMC570LC5	13
HMC232C8	18	HMC345LP3E	19	HMC434E	39	HMC505LP4E	42	HMC571	13
HMC232G7	18	HMC346	11	HMC435MS8GE	18	HMC506LP4E	42	HMC571LC5	13
HMC232G8	18	HMC346C8	11	HMC437MS8GE	39	HMC507LP5E	42	HMC572	13
HMC232LP4E	18	HMC346G8	11	HMC438MS8GE	39	HMC508LP5E	42	HMC572LC5	13
HMC233G8	18	HMC346LC3B	11	HMC439QS16GE	39	HMC509LP5E	42	HMC573LC3B	39
HMC234C8	18	HMC346LP3E	11	HMC440QS16GE	40	HMC510LP5E	42	HMC574MS8E	18
HMC239AS8E	18	HMC346MS8GE	11	HMC441	9	HMC511LP5E	42	HMC575LP4E	39
HMC240A	18	HMC347	18	HMC441LC3B	9	HMC512LP5E	42	HMC576	40
HMC241LP3E	19	HMC347C8	18	HMC441LH5	9	HMC513LP5E	42	HMC576LC3B	40
HMC241QS16E	19	HMC347G8	18	HMC441LM1	9	HMC514LP5E	42	HMC577LC4B	40
HMC244G16	19	HMC347LP3E	18	HMC441LP3E	9	HMC515LP5E	42	HMC578	40
HMC245QS16E	19	HMC348LP3E	18	HMC442	9	HMC516	7	HMC578LC3B	40
HMC247	17	HMC349LP4CE	18	HMC442LC3B	9	HMC516LC5	7	HMC579	40
HMC252QS24E	19	HMC349MS8GE	18	HMC442LM1	9	HMC517	7	HMC580ST89E	8
HMC253LC4	19	HMC351S8E	14	HMC443LP4E	40	HMC517LC4	7	HMC581LP6E	14
HMC253QS24E	19	HMC358MS8GE	41	HMC444LP4E	40	HMC518	8	HMC582LP5E	42
HMC256	13	HMC361	39	HMC445LP4E	40	HMC519	7	HMC583LP5E	42
HMC258	16	HMC361G8	39	HMC446E	18	HMC519LC4	7	HMC584LP5E	42
HMC258LC3B	16	HMC361S8GE	39	HMC447LC3	39	HMC520	13	HMC585MS8GE	14
HMC258LM3	16	HMC362	39	HMC448	40	HMC520LC4	13	HMC586LC4B	42
HMC260	15	HMC362S8GE	39	HMC448LC3B	40	HMC521	13	HMC587LC4B	42
HMC260LC3B	15	HMC363	39	HMC449	40	HMC521LC4	13	HMC588LC4B	42
HMC263	8	HMC363G8	39	HMC449LC3B	40	HMC522	13	HMC589ST89E	8
HMC263LP4E	8	HMC363S8GE	39	HMC451	9	HMC522LC4	13	HMC590	9
HMC264	16	HMC364	39	HMC451LC3	9	HMC523	13	HMC590LP5E	9
HMC264LC3B	16	HMC364G8	39	HMC451LP3E	9	HMC523LC4	13	HMC591	9
HMC264LM3	16	HMC364S8GE	39	HMC452QS16GE	9	HMC524	13	HMC591LP5E	9
HMC265	16	HMC365	39	HMC452ST89E	9	HMC524LC3B	13	HMC592	9
HMC265LM3	16	HMC365G8	39	HMC453QS16GE	9	HMC525	13	HMC593LP3E	7
HMC266	16	HMC365S8GE	39	HMC453ST89E	9	HMC525LC4	13	HMC594	7
HMC270MS8GE	18	HMC368LP4E	39	HMC454ST89E	9	HMC526	13	HMC594LC3B	7
HMC271LP4E	11	HMC369LP3E	39	HMC457QS16GE	9	HMC526LC4	13	HMC595E	18
HMC272AMS8E	15	HMC370LP4E	40	HMC459	10	HMC527	13	HMC596LP4E	19
HMC272MS8E	15	HMC374E	7	HMC460	10	HMC527LC4	13	HMC597LP4E	16
HMC273MS10GE	11	HMC377QS16GE	14	HMC460LC5	10	HMC528	13	HMC598	40

Part #	Page#	Part #	Page#	Part #	Page#	Part #	Page#	Part #	Page#
HMC599ST89E	8	HMC665LP4E	14	HMC757LP4E	10	HMC874LC3C	27	HMC985	11
HMC600LP4E	17	HMC666LP4E	14	HMC758LP3E	7	HMC875LC3C	27	HMC986	18
HMC601LP4E	17	HMC667LP2E	7	HMC759LP3E	12	HMC876LC3C	27	HMC986LP4E	12
HMC602LP4E	17	HMC668LP3E	7	HMC760LC4B	4, 28	HMC877LC3	17, 27	HMC987LP5E	29, 35
HMC603MS10E	11	HMC669LP3E	7	HMC764LP6CE	41	HMC881LP5E	12, 13, 29	HMC988LP3E	4, 35
HMC603QS16E	11	HMC674LC3C	27	HMC765LP6CE	41	HMC882LP5E	12	HMC990LP4E	4, 14
HMC604LP3E	7	HMC674LP3E	27	HMC767LP6CE	41	HMC890LP5E	12	HMC992LP5E	12
HMC605LP3E	7	HMC675LC3C	27	HMC769LP6CE	41	HMC891LP5E	12	HMC993LP5E	12
HMC606	11	HMC675LP3E	27	HMC770LP4BE	8	HMC892LP5E	12	HMC994	9
HMC606LC5	11	HMC676LC3C	27	HMC772LC4	7	HMC893LP5E	12	HMC995LP5GE	10
HMC607	18	HMC676LP3E	27	HMC773	15	HMC894LP5E	12	HMC996LP4E	19
HMC607G7	18	HMC677G32	30	HMC773LC3B	15	HMC895LP4E	12	HMC997LC4	19
HMC608LC4	9	HMC677LP5E	30	HMC774	15	HMC897	4, 12	HMC998	9
HMC609	7	HMC680LP4E	19	HMC774LC3B	15	HMC897LP4E	12	HMC999	9
HMC609LC4	7	HMC681LP5E	19	HMC775LC5	13	HMC898LP4E	12	HMC1000LP5R	12
HMC611	17	HMC682LP6CE	14	HMC778LP6CE	41	HMC899	12	HMC1010LP4E	17
HMC611LP4E	17	HMC683LP6CE	14	HMC783LP6CE	41	HMC899LP4E	12	HMC1013LP4E	18
HMC612LP4E	17	HMC684LP4E	14	HMC784MS8GE	18	HMC902	7	HMC1014	4, 9
HMC613LC4B	18	HMC685LP4E	14	HMC785LP4E	14	HMC902LP3E	7	HMC1015	15
HMC615LP4E	14	HMC686LP4E	14	HMC786LP4	14	HMC903	7	HMC1016	9
HMC616LP3E	7	HMC687LP4E	14	HMC787LC3B	15	HMC903LP3E	7	HMC1018LP4E	11
HMC617LP3E	7	HMC688LP4E	14	HMC788LP2E	8	HMC904LC5	13	HMC1019LP4E	11
HMC618LP3E	7	HMC689LP4E	14	HMC789ST89E	8	HMC905LP3E	39	HMC1020LP4E	17
HMC619	10	HMC690	30	HMC792LP4E	12	HMC906	10	HMC1021LP4E	17
HMC619LP5E	10	HMC693	10	HMC794LP3E	39	HMC907	10	HMC1024	4, 10
HMC620	13	HMC694	19	HMC795LP5E	16	HMC907LP5E	10	HMC1029	4, 10
HMC620LC4	13	HMC694LP4E	19	HMC797	10	HMC908LC5	13	HMC1030LP5E	17
HMC621LP4E	14	HMC695LP4E	40	HMC797LP5E	10	HMC909LP4E	17	HMC1031MS8E	4, 35
HMC622LP4E	14	HMC696LP4E	16	HMC798LC4	16	HMC910LC4B	27	HMC1032LP6GE	35
HMC623LP4E	14	HMC697LP4E	16	HMC799LP3E	30	HMC911LC4B	27	HMC1034LP6GE	35
HMC624LP4E	11	HMC698LP5E	40	HMC800LP3E	11	HMC913	18	HMC1040LP3CE	4, 8
HMC624LP4E	12	HMC699LP5E	40	HMC801LP3E	11	HMC913LC4B	18	HMC1041LC4	13
HMC625HFLP5E	19	HMC700LP4E	40	HMC802LP3E	11	HMC914LP4E	30	HMC1042LC4	4, 13
HMC625LP5E	19	HMC701LP6CE	40	HMC807LP6CE	41	HMC915LP4E	14	HMC1043LC3	15
HMC626LP5E	19	HMC702LP6CE	40	HMC812LC4	11	HMC916LP3E	40	HMC1044LP3E	4, 12, 39
HMC627LP5E	19	HMC703LP4E	40	HMC813	18	HMC917LP3E	40	HMC1048LC3B	15
HMC628LP4E	19	HMC705LP4E	39	HMC813LC4B	18	HMC920LP5E	28	HMC1050	30
HMC629LP4E	11	HMC706LC3C	29	HMC814	39	HMC921LP4E	9	HMC1051	30
HMC630LP3E	16	HMC707LP5E	19	HMC814LC3B	40	HMC922LP4E	18	HMC1060LP3E	12, 28, 39
HMC631LP3E	16	HMC708LP5E	19	HMC815LC5	14	HMC924LC5	14	HMC1097LP4E	16
HMC632LP5E	42	HMC709LC5	14	HMC816LP4E	7	HMC925LC5	14	HMC5850BG	4, 30
HMC633	10	HMC710LC5	14	HMC817LP4E	7	HMC926LP5E	19		
HMC633LC4	10	HMC711LC5	16	HMC818LP4E	7	HMC928LP5E	17	HMCAD1040-40	28
HMC634	10	HMC712	11	HMC819LC5	14	HMC929LP4E	17	HMCAD1040-80	28
HMC634LC4	10	HMC712LP3CE	11	HMC820LP6CE	35, 41	HMC930	10	HMCAD1041-40	28
HMC635	10	HMC713LP3E	17	HMC821LP6CE	35, 41	HMC931LP4E	17	HMCAD1041-80	28
HMC635LC4	10	HMC713MS8E	17	HMC822LP6CE	35, 41	HMC932LP4E	17	HMCAD1050-40	27
HMC636ST89E	8	HMC715LP3E	7	HMC824LP6CE	35, 41	HMC933LP4E	17	HMCAD1050-80	27
HMC637	10	HMC716LP3E	7	HMC826LP6CE	35, 41	HMC934LP5E	17	HMCAD1051-40	28
HMC637LP5E	10	HMC717LP3E	7	HMC828LP6CE	35, 41	HMC935LP5E	17	HMCAD1051-80	28
HMC639ST89E	8	HMC718LP4E	7	HMC829LP6GE	35, 41	HMC936LP6E	17	HMCAD1100	27
HMC641	19	HMC719LP4E	7	HMC830LP6GE	35, 41	HMC939	11	HMCAD1101	27
HMC641LC4	19	HMC720LC3C	28	HMC831LP6CE	35, 41	HMC939LP4E	11	HMCAD1102	27
HMC641LP4E	19	HMC720LP3E	28	HMC833LP6GE	35, 41	HMC940LC4B	28	HMCAD1104	4, 27
HMC642	17	HMC721LP3E	29	HMC834LP6GE	35, 41	HMC941	11	HMCAD1510	27
HMC642LC5	17	HMC722LP3E	29	HMC836LP6CE	35, 41	HMC941LP4E	11	HMCAD1511	27
HMC643	17	HMC723LP3E	29	HMC837LP6CE	35, 41	HMC942LP4E	40	HMCAD1520	27
HMC643LC5	17	HMC724LC3C	28	HMC838LP6CE	35, 41	HMC943LP5E	10	HMCAD5831LP9BE	4, 28
HMC644	17	HMC725LC3C	29	HMC839LP6CE	35, 41	HMC944LC4	19		
HMC644LC5	17	HMC726LC3C	29	HMC840LP6CE	35, 41	HMC948LP3E	17	HMC-ABH209	9
HMC646LP2E	18	HMC727LC3C	29	HMC841LC4B	29	HMC949	9	HMC-ABH241	9
HMC647	17	HMC732LC4B	42	HMC842LC4B	28	HMC950	10	HMC-ABH264	9
HMC647LP6E	17	HMC733LC4B	42	HMC843LC4B	29	HMC951LP4E	13	HMC-ALH102	10
HMC648	17	HMC734LP5E	42	HMC844LC4B	29	HMC952	4, 9	HMC-ALH140	8
HMC648LP6E	17	HMC735LP5E	42	HMC847LC5	30	HMC952LP5GE	4, 9	HMC-ALH216	7
HMC649	17	HMC736LP4E	42	HMC848LC5	30	HMC953LC4B	29	HMC-ALH244	8
HMC649LP6E	17	HMC737LP4E	42	HMC849LP4CE	18	HMC954LC4B	30	HMC-ALH310	8
HMC650	16	HMC738LP4E	42	HMC850LC3C	28	HMC955LC4B	30	HMC-ALH311	8
HMC651	16	HMC739LP4E	42	HMC851LC3C	29	HMC958LC5	29	HMC-ALH313	8
HMC652	16	HMC740ST89E	8	HMC852LC3C	29	HMC959LC3C	29	HMC-ALH364	8
HMC652LP2E	16	HMC741ST89E	8	HMC853LC3C	29	HMC960LP4E	13, 29	HMC-ALH369	8
HMC653	16	HMC742HFLP5E	19	HMC854LC5	30	HMC962LC4	7	HMC-ALH376	8
HMC653LP2E	16	HMC742LP5E	19	HMC855LC5	30	HMC963LC4	7	HMC-ALH382	8
HMC654	16	HMC743LP6CE	19	HMC856LC5	27	HMC965LP4E	10	HMC-ALH435	7
HMC655	16	HMC744LC3C	28	HMC857LC5	27	HMC966LP4E	13	HMC-ALH444	7
HMC655LP2E	16	HMC745LC3C	29	HMC858LC4B	29	HMC967LP4E	13	HMC-ALH445	7
HMC656	16	HMC746LC3C	29	HMC859LC3C	29	HMC968	10	HMC-ALH476	7
HMC656LP2E	16	HMC747LC3C	29	HMC860LP3E	12, 28, 39	HMC969	10	HMC-ALH482	10
HMC657	16	HMC748LC3C	29	HMC861LP3E	39	HMC972LP5E	19	HMC-ALH508	8
HMC657LP2E	17	HMC749LC3C	29	HMC862LP3E	39	HMC973LP3E	11	HMC-ALH509	8
HMC658	17	HMC750LP4E	30	HMC863	10	HMC976LP3E	12, 28, 39	HMC-APH196	9
HMC658LP2E	17	HMC751LC4	7	HMC863LP4E	10	HMC977LP4E	13	HMC-APH403	9
HMC659	10	HMC752LC4	8	HMC864	10	HMC980	4, 28	HMC-APH460	10
HMC659LC5	10	HMC753LP4E	7	HMC865LC3C	30	HMC980LP4E	28	HMC-APH462	10
HMC660LC4B	28	HMC754S8GE	8	HMC866LC3C	30	HMC981	28	HMC-APH473	10
HMC661LC4B	4, 28	HMC755LP4E	9	HMC869LC5	13	HMC981LP3E	28	HMC-APH478	10
HMC662LP3E	17	HMC756	10	HMC870LC5	30	HMC983LP5E	39, 40	HMC-APH510	9
HMC663LC3	14	HMC757	10	HMC871LC5	30	HMC984LP4E	39, 40	HMC-APH518	10

PART NUMBER INDEX

Part #	Page#	Part #	Page#
HMC-APH596	9	HMC-C033	45
HMC-APH608	10	HMC-C034	45
HMC-APH633	9	HMC-C035	45
HMC-APH634	9	HMC-C036	44
HMC-AUH232	10	HMC-C037	44
HMC-AUH249	10	HMC-C038	44
HMC-AUH256	8	HMC-C039	45
HMC-AUH312	10	HMC-C040	45
HMC-AUH317	9	HMC-C041	45
HMC-AUH318	9	HMC-C042	45
HMC-AUH320	9	HMC-C043	45
HMC-MDB169	15	HMC-C044	45
HMC-MDB171	13	HMC-C045	44
HMC-MDB172	13	HMC-C046	45
HMC-MDB207	13	HMC-C047	45
HMC-MDB218	13	HMC-C048	44
HMC-MDB277	15	HMC-C049	45
HMC-SDD112	18	HMC-C050	44
HMC-VVD102	11	HMC-C051	45
HMC-VVD104	11	HMC-C052	45
HMC-VVD106	11	HMC-C053	44
HMC-XDB112	40	HMC-C055	45
HMC-XDH158	40	HMC-C056	45
HMC-XTB110	40	HMC-C058	46
		HMC-C059	44
HMC-C001	44	HMC-C060	45
HMC-C002	44	HMC-C061	45
HMC-C003	44	HMC-C062	45
HMC-C004	44	HMC-C064	45
HMC-C005	45	HMC-C065	45
HMC-C006	45	HMC-C070	46
HMC-C007	45	HMC-C071	46
HMC-C009	45	HMC-C072	44
HMC-C010	45	HMC-C073	46
HMC-C011	46	HMC-C074	44
HMC-C013	44	HMC-C075	44
HMC-C014	45	HMC-C076	44
HMC-C015	45	HMC-C077	44
HMC-C016	44	HMC-C078	45
HMC-C017	44	HMC-C079	44
HMC-C018	44	HMC-C083	46
HMC-C019	46	HMC-C200	44
HMC-C020	44		
HMC-C021	44	HMC6000	4, 19
HMC-C022	44	HMC6001	4, 19
HMC-C023	44		
HMC-C024	44	HMC6383	51
HMC-C025	44		
HMC-C026	44	HMC-T2000	49
HMC-C027	44	HMC-T2100	49
HMC-C028	46	HMC-T2100B	49
HMC-C029	46	HMC-T2220	49
HMC-C030	46	HMC-T2220B	49
HMC-C031	45	HMC-T2240	49
HMC-C032	45	HMC-T2270	49

Connecting Our World Through Integrated Solutions

Order On-line at: www.hittite.com



Americas

Hittite Microwave Corporation USA Corporate Headquarters

Phone: 978-250-3343
Fax: 978-250-3373
sales@hittite.com

Eastern - North America

Boston, MA
Phone: 978-270-3167
usa-east-north@hittite.com

Philadelphia, PA
Phone: 978-337-1226
usa-east-south@hittite.com

Central (North) - North America

Chicago, IL
Phone: 312-485-8730
usa-north@hittite.com

Central (South) - North America

Dallas, TX
Phone: 817-727-7146
usa-south@hittite.com

Western - North America

Los Angeles, CA
Phone: 626-961-5602
usa-west@hittite.com

Mexico, Central & South America

Dallas, TX
Phone: 978-250-3343 x1250
southamerica@hittite.com

Europe, Middle East & Africa

Hittite International Limited International Headquarters

Phone: +353-21-240-7996
Fax: +353-21-240-7997
sales@hittite.com

United Kingdom, Ireland, Spain, Portugal, Greece & Turkey

Hittite Microwave Europe Limited
Phone: +44-7811-267418
Fax: +978-250-3373
europe@hittite.com

France, Italy & Benelux

Hittite Microwave Deutschland GmbH
Phone: +44-7811-267418
Fax: +978-250-3373
europe@hittite.com

Northern Europe

Hittite Microwave Nordic AB
Phone: +46-761-763969
nordic@hittite.com

Central & Eastern Europe

Hittite Microwave Deutschland GmbH
Phone: +49-8031-97654
Fax: +49-8031-98883
germany@hittite.com

Africa

Hittite Microwave Egypt
Phone: +202-275-46812
Fax: 978-250-3373
egypt@hittite.com

Asia & Pacific

Australia & New Zealand

Hittite Microwave Corporation
Phone: 978-250-3343
Fax: 978-250-3373
ausnz@hittite.com

India

Hittite Microwave India
Phone: +91-40-44311254
Fax: +91-40-44311100
india@hittite.com

Republic of Korea

Hittite Microwave Asia Co., Limited
Phone: +82-2559-0638
Fax: +82-2559-0639
korea@hittite.com

Peoples Republic of China

Hittite Microwave Co., Limited
Shanghai Office
Phone: +86-21-6209-8809
Fax: +86-21-6209-6730
china@hittite.com

Shenzhen Office

Phone: +86-755-3322-2116
Fax: +86-755-3322-2117
shenzhen@hittite.com

Beijing Office

Phone: +86-10-6485 9219
Fax: +86-10-6485 0377
beijing@hittite.com

Japan

Hittite KK
Phone: +81-3-5652-5772
Fax: +81-3-5652-6694
japan@hittite.com

Sales Representatives

Americas

Brazil:
Vermont Rep. Com. Ltda
+55 11 3728-6655

Canada:
Repwave
Calgary, Ottawa & Montreal:
+613-270-9811
Toronto:
+647-883-7360
Vancouver:
+604-929-8541

Mexico
Quad State Sales and Marketing
918-499-1711

Central & South America
Hittite Microwave Corporation
978-250-3343 x1250

USA North East & Mid-Atlantic;

CT, MA, ME, NH,
So. NJ, RI & VT:
Microwave Marketing Specialist
978-392-0110

Western NY:

Zimmerman Sales
585-381-3186

So. CT, Metro LI & No. NJ:
Comp Tech
973-832-4545

Eastern PA & So. NJ
Omega Electronic Sales, Inc.
215-244-4000

Western PA
Schilling Associates, Inc.
765-457-7241

DC, DE, MD, VA & WV:
Vincent Pirro Electronics
410-489-9554

USA Mid-West;

IA
Essig & Associates
319-363-8703

AK, KS, LA, W. MO, OK, TX:
Quad State Sales & Marketing
918-499-1711

IL & WI:
TEQ Sales
847-742-3767

IN, KY, MI & OH:
Schilling Associates, Inc.
765-457-7241

NE:
HMC Central (North) - North America
312-485-8730

MN, ND, SD & W. WI:
Matrix Design Technology
952-400-1070

USA South East;

AL, FL, GA, MS, NC, SC & TN:
Precision Marketing Inc.
954-752-1700

USA South West;

AZ & NM:
Saguaro Technical Sales, Inc.
480-947-3724

AR:

HMC Central (South) - North America
817-727-7146

USA West;

CO, ID, MT, UT & WY:
Innovation Sales
303-652-3030

No. CA & NV:
Custom & Wireless Sales
408-371-0222

So. CA:
Acetec
858-784-0900

OR & WA:
Sea-Port Technical Sales
425-702-8300

Europe, Mid-East & Africa

Germany, Austria, Poland, Switzerland
MEV Elektronik Service GmbH
49 5424 2340-28

Czech Republic, Estonia, Hungary,
Latvia, Lithuania, Slovakia:
Hittite Microwave Deutschland GmbH
+49 8031-97654

Belgium, Luxembourg:
Nijkerk Electronics N.V.
+32 3 544 70 66

Bosnia Herzegovina, Bulgaria,
Croatia, Macedonia, Romania,
Serbia Montenegro & Slovenia
IC Elektronika
+386(0) 1 568-01-18

Denmark
Acte A/S
+45 46 900 400

Netherlands:
Nijkerk Electronics B.V.
+31 20 504 14 24

Norway & Sweden:
Hittite Microwave Nordic AB
+46-761-763969

Finland:
LKC OY
+358-400-460-646France:

France:
L-TEQ Microwave
+33-1-3007-7780

Greece:
Hittite Microwave Europe Limited
+44-7811-267418

United Kingdom & Ireland:
Firefly Technology Ltd.
+44-1256-884980

Italy:
Special-Ind SPA
+39-02-6074741

Norway:
Bredengen AS
+47-2100-9100

Russia
Radiant-Elcom Ltd.
+7(495) 725-0404

Spain & Portugal:
Altaix Electronica S.A.L
+34-91-636-39-39

South Africa:
RF Design Laboratory CC
+27-21-555-8400

Turkey:
EMPA Electronics
+90 (212) 465-71-99

Asia & South Pacific

Australia & New Zealand:
Braemac
+61-8-8275-0100

China & Hong Kong:
Gateway Tech Co., Ltd.
+0755-8608-1010
Secom Telecom Co., Ltd.
+86-755-25155888

Wai Tat Electronics Ltd.
+852-2799-7393

India:
Syratron
+91-802-5591107/5591031

Indonesia, Malaysia,
Philippines & Singapore
MEDS Technologies, Pte., Ltd.
+65-6453-8313

Japan:
Daito Electron Co., Ltd
+81-3-3237-1471

Rikei Corporation (only FO & HSL)
+81-3-3345-2150

Korea:
EZ Hightech
+82-031-382-6500

JS Commtech
+82-2-574-6100

Makus
82-2-3490-9526

Taiwan R.O.C.:
Bandtek International Co., Ltd.
+886-2-2657-2615

Instrumentation Sales Representatives

North America

CT, MA, ME, NH, RI & VT:
PAT Associates
401-783-9598

NJ, NY & E.PA:
Tera Technologies
888-449-2799

AZ, CO, ID, MO, NM, UT & WY:
Technologies West RMS
602-312-3789

CA & NV:
Tritek Solutions
949-609-0560

OR & WA:
Tritek Northwest
949-609-0560

Europe

Belgium, Luxembourg & Netherlands:
AR Benelux B.V.
+31-172-423-000

Finland, Lithuania, Latvia & Estonia:
Caltest Oy
358 9 530 607 0

Greece:
Vector Technologies, LTD
+30-210-68-58-008

Italy:
Giakova srl
+39-023-3512100

Russian Federation:
Radiant-Elcom Ltd.
+7(495) 725-0404

Spain:
AFC Ingenieros, S.A.
+34 91 365 44 05

Sweden
RF Partner AB
+46-31-475100

Turkey:
Spark Olcum Teknolojileri Ltd. Sti
+90 (312) 466 821

United Kingdom:
MCS Test Equipment LTD
08453 62 63 65

Asia

China:
WAT-COM Technologies
86-755-86233486

Taiwan R.O.C.:
T&E Communication
886-2-82211258

Japan:
Farad
+82-3-5261-3091

© 2012, Hittite Microwave Corporation, All Rights Reserved.

2 Elizabeth Drive • Chelmsford, MA 01824 • 978-250-3343 tel • 978-250-3373 fax

Boston • Cork • Hyderabad • London • Munich • Seoul • Shanghai • Stockholm • Tokyo