


Application Note APNT-0014 Two Source Remote Audio Monitor

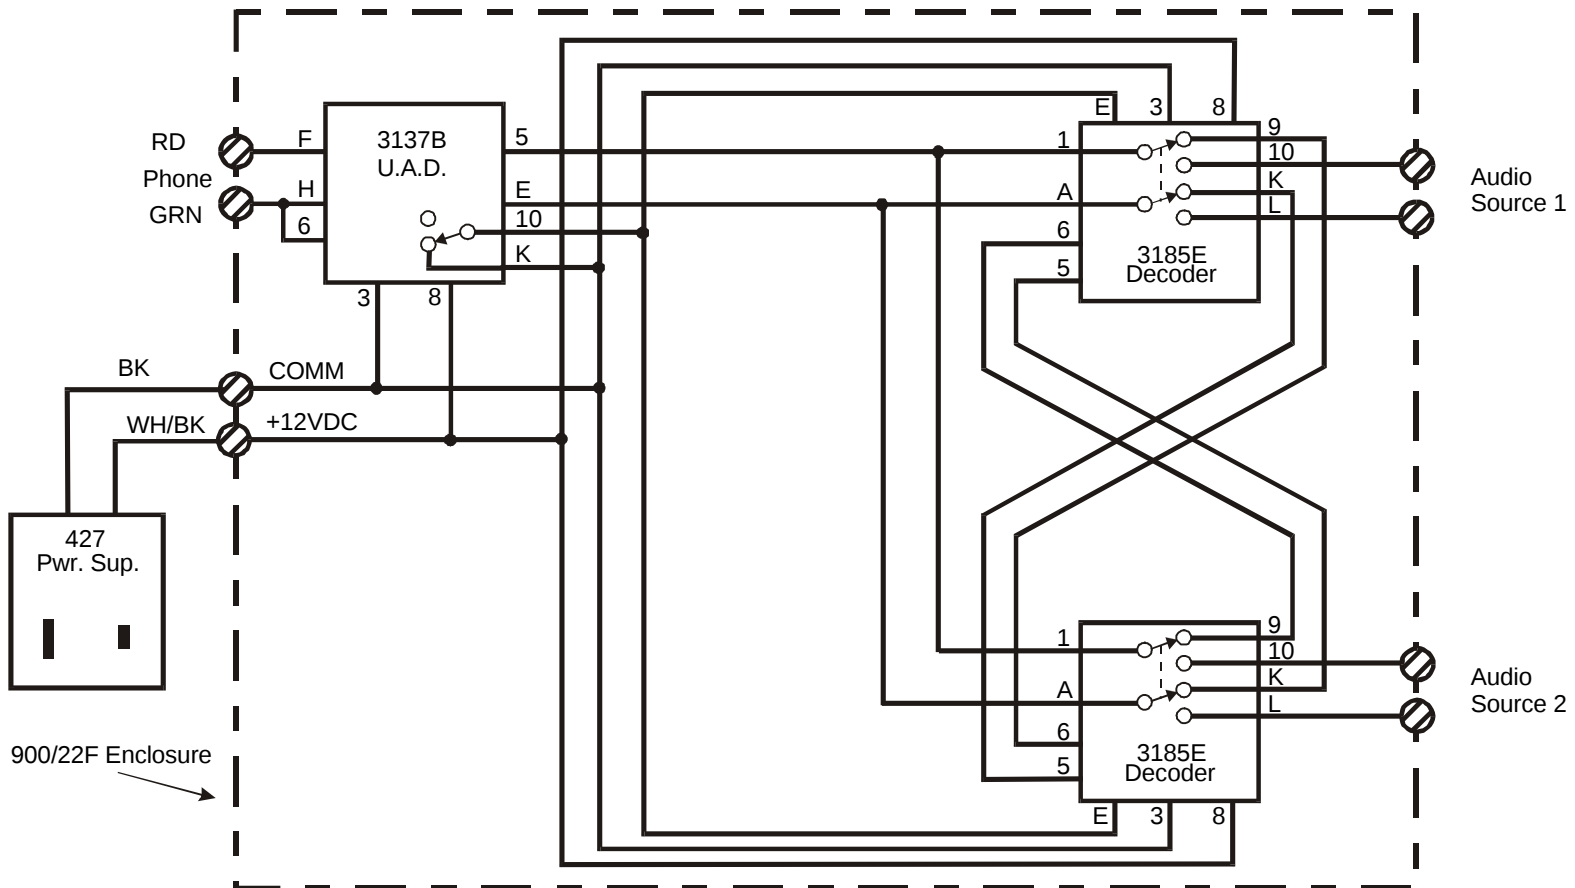

OPERATION:

UAD connects to phone line after prescribed number of rings.
Operator enters correct codes to complete bi-directional audio path to Source 1 or Source 2.
Monitor disconnects from phone line per selection (time, loop current interrupt or both)
or optional use of Model 90417 Dial Tone Decoder.
Decoders reset upon disconnect providing maximum security.