



Molecular Crystals and Liquid Crystals

Publication details, including instructions for authors and subscription information:

<http://www.tandfonline.com/loi/gmcl20>

Static Configuration of the Super In-Plane Switching Liquid Crystal Director on the Electrode

Joun-Ho Lee^{a, b}, Seong-Wook Choi^c, Kyung-Mi Kim^c,
Gi-Dong Lee^c, Hyun Chul Choi^a, Seung Hee Lee^d
& Jae Chang Kim^b

^a LG Philips LCD, Gumi-city, Kyungbuk, Korea

^b Department of Electronics Engineering, Pusan National University, Busan, Korea

^c Department of Electronics Engineering, Dong-A University, Busan, Korea

^d School of Advanced Materials Engineering, Chonbuk National University, Chonbuk, Korea

Version of record first published: 22 Sep 2010

To cite this article: Joun-Ho Lee, Seong-Wook Choi, Kyung-Mi Kim, Gi-Dong Lee, Hyun Chul Choi, Seung Hee Lee & Jae Chang Kim (2007): Static Configuration of the Super In-Plane Switching Liquid Crystal Director on the Electrode, *Molecular Crystals and Liquid Crystals*, 478:1, 99/[855]-105/[861]

To link to this article: <http://dx.doi.org/10.1080/15421400701735707>

PLEASE SCROLL DOWN FOR ARTICLE

Full terms and conditions of use: <http://www.tandfonline.com/page/terms-and-conditions>

This article may be used for research, teaching, and private study purposes. Any substantial or systematic reproduction, redistribution, reselling, loan, sub-licensing, systematic supply, or distribution in any form to anyone is expressly forbidden.

The publisher does not give any warranty express or implied or make any representation that the contents will be complete or accurate or up to date. The accuracy of any instructions, formulae, and drug doses should be independently verified with primary sources. The publisher shall not be liable for any loss, actions, claims, proceedings, demand, or costs or damages whatsoever or howsoever caused arising directly or indirectly in connection with or arising out of the use of this material.



Static Configuration of the Super In-Plane Switching Liquid Crystal Director on the Electrode

Joun-Ho Lee

LG Philips LCD, Gumi-city, Kyungbuk, Korea; Department of Electronics Engineering, Pusan National University, Busan, Korea

Seong-Wook Choi

Kyung-Mi Kim

Gi-Dong Lee

Department of Electronics Engineering, Dong-A University, Busan, Korea

Hyun Chul Choi

LG Philips LCD, Gumi-city, Kyungbuk, Korea

Seung Hee Lee

School of Advanced Materials Engineering, Chonbuk National University, Chonbuk, Korea

Jae Chang Kim

Department of Electronics Engineering, Pusan National University, Busan, Korea

In this work we investigate dynamic behavior of the LC director including the defect nucleation and the LC director field on the shape of the electrode using the Q-tensor method in the Super IPS cell. In general, the Q-tensor method can model the defect dynamics in a liquid crystal director field in addition to electrical behavior of the LC director.

Keywords: defect; fast Q-tensor; liquid crystal; super-IPS

This work was support in part by LG Philips LCD and this research was supported by a grant (F0004132-2006-22) from the Information Display R&D Center, one of the 21st Century Frontier R&D Program funded by the Ministry of Commerce, Industry and Energy of the Korean Government.

Address correspondence to G.-D. Lee, Department of Electronics Engineering, Dong-A, University, Busan, 604-714, Korea. E-mail: gdlee@dau.ac.kr and H.-C. Choi, LG Philips LCD, 642-3 Jinpyung-dong, Gumi-city, Kyungbuk, 730-350, Korea. E-mail: chc4321@lgphilips-lcd.com

1. INTRODUCTION

The super-in plane switching (S-IPS) mode [1] has been widely used to various applications because of their excellent optical performance. In the early days, main issue of the S-IPS mode is how to increase the transmittance. So, the investigation is active about relations between the operating voltage and liquid crystal (LC) bulk area. Recently, To increase contrast ratio over 1:600, polarizer film, backlight sheet, color filter resin, taper angle of electrode, and rubbing conditions have all been investigated [2]. Especially, using the compensative film achieve the wide viewing angle, even though in the diagonal direction just like the true wide- IPS (TW-IPS) [3].

However, S-IPS mode has to apply multi-domain structures in a single pixel to their superior optical performance. Through multi-domain structures, we can easily get the wide viewing angle property, but multi-domain structures have also disadvantages. Precisely, multi-domain structures exhibit disclinations because of the spatial LC director field which has high elastic distortion energy due to the multi-domain effect.

Sometimes, disclinations cause a decrease of the optical transmittance of the multi-domain LC cell. Therefore, an understanding of the dynamic behavior of the LC director field has become important for advanced LC modes such as the S-IPS mode and the Patterned-VA (PVA) [4] mode.

In this work we investigate especially parts of the electrode's edge, electrodes patterned just like a "V" shape and around boundary of the multi-domain. From the result of simulation, the Q-tensor method [5] is similar to the real panel. Generally, LC dynamics are very unstable around the edge of the electrode, so that we can easily find the unstable disclinations. It is possible to control LC dynamics around the edge the electrode using different electrode shape. From experimental results we reveal, when we use the Q-tensor method we can design effective electrodes in the S-IPS mode.

2. OBSERVATIONAL RESULTS OF REAL PANAL

Figure 1 shows the photograph of the S-IPS cell. The liquid crystal with positive dielectric anisotropy ($\Delta n = 0.0846$ at $\lambda = 589 \text{ nm}$, $\Delta \epsilon = 8.4$) from Merck was used in our experiments and simulations. The width of the electrodes was $3.5 \mu\text{m}$, the distance between the electrodes was $11 \mu\text{m}$, and the electrode angle was 70° . The pre tilt angle generated by the rubbing is 2° . The two glass substrates were then assembles to provide a cell gap (d) of $3.4 \mu\text{m}$. Two polarizers are

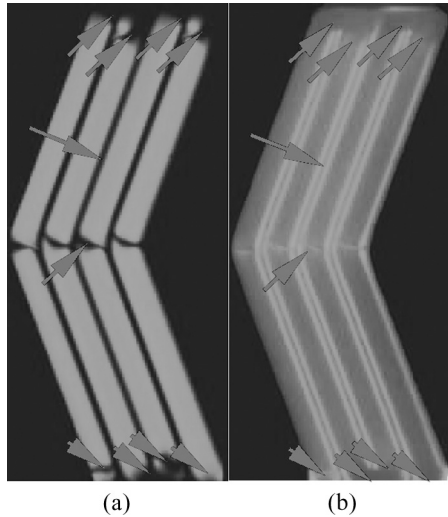


FIGURE 1 Photograph of the super-IPS cell in the bright state: (a) with transmissive mode, (b) with reflective mode.

oriented to cross each other and one of them is aligned parallel to the rubbing direction.

Red arrows indicate disclination areas. We observed three types of disclinations. First is the disclination is around the edge of the electrode. Second is the disclination is on the electrode. And the last is the generated disclination at boundary of the multi-domain which located in middle area of the S-IPS cell. We found disclinations cause a decrease of the optical transmittance of the S-IPS cell because areas of the disclination were duskier than other areas at the white state.

3. SIMULATION AND EXPERIMENTAL RESULTS

Normally, conventional super-IPS cells do not have defect trap at the edge of the electrode, so we can observe unstable dynamic behavior because high strain energy can be stored in the very small area. Figure 2 shows the nucleated defect on the edge of the electrode.

In general, edge of the electrode can easily make the nucleation of the defect because the generated defect due to competition of the strain energy from the edge of the electrode move to upper right side by applying the voltage. Figure 2(a) and (b) shows microscopic photographs of the LC cell when applied voltage is 8 V and 10 V, respectively.

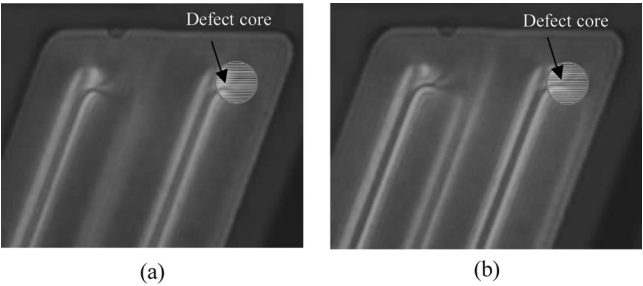


FIGURE 2 Photograph of the generated defect cores around edge of the super-IPS LC cell: (a) with applied voltage of 8 V, (b) with applied voltage of 10 V.

Figure 3 shows the 3-dimensional modeling of the LC director field around the edge from the simulation by using fast Q-tensor method. We found the defect core moves to upper right side by applying the voltage. As a matter of fact the same result from when we observe the real panel. Figure 3(a) shows us the simulation result when

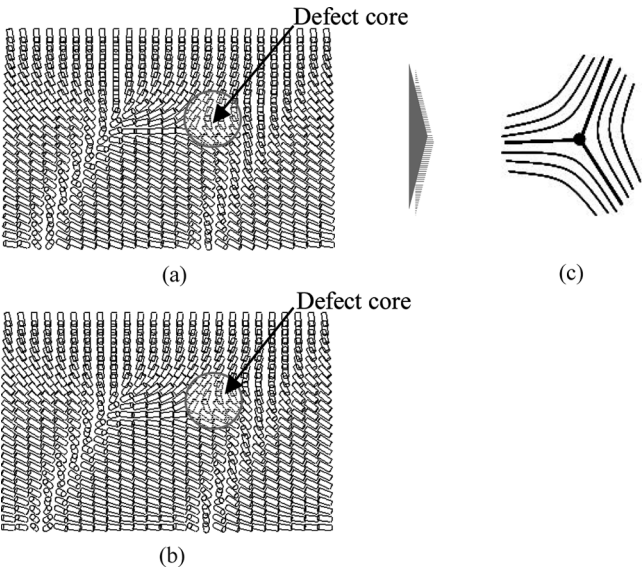


FIGURE 3 Modeling of the LC configuration on the edge of the electrode in super-IPS LC: (a) When the applied voltage is 8 V, (b) When the applied voltage is 10 V, (c) cartoon of the modeling of the nucleated defect.

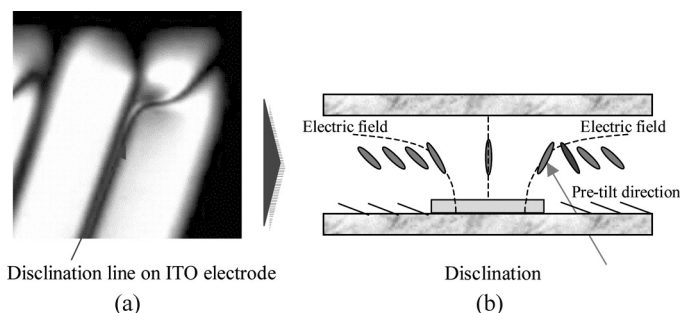


FIGURE 4 The Disclination line on the electrode of the S-IPS cell: (a) Photograph of the disclination line on the electrode, (b) Cartoon of the electric field direction on the electrode.

applied the V_{pp} 8 V. Figure 3(b) shows us the simulation result when applied the V_{pp} 10 V. Figure 3(c) shows the LC director configuration can be modeled to defect with Frank index $n = -1$ and strengths $s = -1/2$ [6].

Figure 4(a) shows the photograph of the disclination line on the electrode. Figure 4(b) shows the electric field's direction with LC directors. The LC director stands up by following the vertical electric field in the middle of the electrode, so the defect nucleation has not been found. However, the LC director of the edge of the electrode moves to the electric field's direction. And then the LC directors of the bulk area have been affected by the pre-tilt's direction. Accordingly, the LC director field of two kinds of areas are competed each other. The LC director field has the defect nucleation by stored strong elastic energy in the case of the edge around the electrode.

Figure 5 shows the Modeling of the LC configuration on the electrode in super-IPS LC cell. From Figure 5(a) to Figure 5(d) are modeling of the LC configuration each layer when we parted 10 layers from the LC layer. As the result of simulation, LC directors on the electrode stand up by following the vertical electric field according to the defect nucleation has not been found at lower LC layers. However, LC directors on the electrode has twisted by following the horizontal electric field defect nucleation by stored strong elastic energy at upper LC layers.

Figure 6 (a) shows the photograph of the boundary of the multi-domain in the middle area. We observed the disclination line which shape just like "S". Reverse rubbing makes "S" shape curve. The disclination on the upper electrode is caused by the small light-leakage. On the contrary, the disclination on the lower electrode is caused by

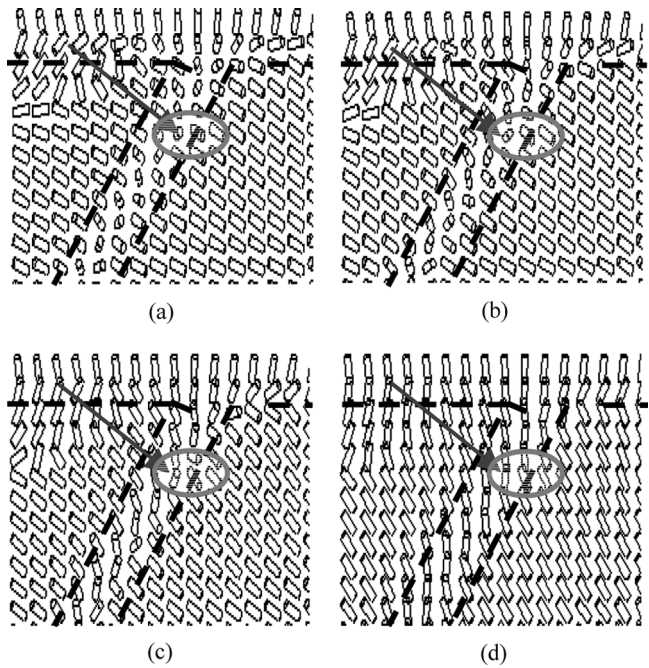


FIGURE 5 Modeling of the LC configuration on the electrode in super-IPS LC cell: (a) director modeling of the sixth layer, (b) director modeling of the seventh layer, (c) director modeling of the eighth layer, (d) director modeling of the ninth layer.

the large light-leakage. Figure 6(b) shows the Modeling of the LC configuration around boundary of the multi-domain in the middle area. It also shows the distribution of the director around boundary

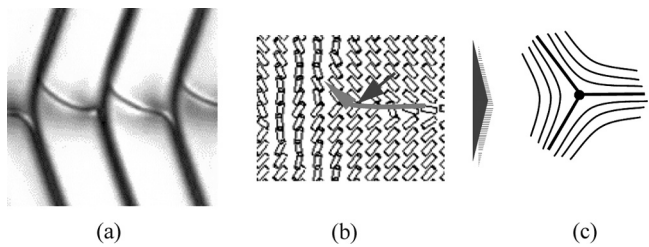


FIGURE 6 Photograph with Modeling of the LC director in the middle area of the super-IPS LC cell: (a) Photograph of the disclination line in the middle area, (b) Modeling of the LC configuration around boundary of the multi-domain in the middle area, (c) Cartoon of the modeling of the defect.

of the multi-domain. For that reason, we investigate the LC director configuration can be modeled to defect with Frank index $n = -1$ and strength $s = -1/2$ [6]. That is Figure 6(c).

4. CONCLUSION

We observed three types of disclinations on the S-IPS LC cell. First is the disclination around the edge of the electrode. Second is the disclination is on the electrode. And the last is generated around boundary of the multi-domain which located in middle area of the S-IPS cell. Also we modeled three types of disclinations by using the Q-tensor method. For better optical characteristics of the LC cell, various structure of the LC cell should be considered because the defect, which is generated by the non-uniform voltage distribution by structure of the electrode, may cause the unpredictable optical loss because of generated defects.

REFERENCES

- [1] Masahito Oh-e, Katsumi Kondo. (1995). *Applied Physics Lett.*, 67, 3895.
- [2] Yeo, S. D., Oh, C. H., Lee, H. W., & Park, M. H. (2005). *SID05 Digest*, p. 1738.
- [3] Joun-Ho Lee, Jin-Ho Kim, Chung-sun Lim, Sung-O Mun, Chang-Ho Oh, Jae Chang Kim, & Gi-Dong Lee (2005). *SID05 digest*, p. 92.
- [4] Kim, S. S. et al. (2004). Super-PVA Sets New State-of-the Art for LCD-TV, *SID Symposium Digest*, 35, 60–763.
- [5] Mori, H., Gartland, E. C., Kelly, J. R., & Bos, P. J. (1999). *Jpn. J. Appl. Phys.*, 38, 135–146.
- [6] Stewart, Iain W. (2004). *The Static and Dynamic Continuum Theory of Liquid Crystals*, Taylor & Francis: London and New York.