

practical Wireless

DXPERTISE WITH DEVEREUX

Mike G3SED Shares His Camel Trophy
Radio Adventures

THE PW DAVENTRY

Build a 7MHz Receiver - Part 2

PW QRP CONTEST RESULTS

How Did You Fare This Year?

ANTENNA WORKSHOP

And All The Regular Favourites

LEICESTER
SHOW
Bumper Issue

TEX'S TREAT

Trying The Yaesu FT-10R ▶

A 'SMART' LOOK

At The Yaesu FT-8500
Mobile ▼



ISSN 0141-0857



11 >

9 770141 085020



NEW
Dual Band HT

Dual Band Handheld **FT-51R**

Only one Dial/Volume knob
required for easier use.

The First Dual Band HT with **WINDOWS!**

Three dual receive configurations VHF/VHF, UHF/UHF, or VHF/UHF with main band frequency on right or left side. Flexible programming allows transmit on main or sub band.

An 8 character alpha-numeric user help menu scrolls operation instructions in the bottom of the large, backlit display.

MH-29A2B
LCD Display Mic
with Remote
Functions.
(Optional)

The new FT-51R Dual Band HT is state-of-the-art, and easy to use!

So easy, you won't need an operating manual. Its exclusive, scrolling instruction menu located in the large, backlit display "window", guides you through total operation while simultaneously viewing the main display window.

You'll like some of the other new, exclusive features, too. Like Spectrascope™. This unique feature displays real time, continuous scanning of activity on adjacent frequencies in VFO mode or 8 of your favourite

"I can see two frequencies and alpha-numeric all at the same time."

"Scrolling instructions tell me what to do next!"



Digital battery voltage readout displays condition of battery in use. Scan skip function allows individual memory channel lock-out during scanning mode.

FT-51R
2 1/4"W x 4 1/4"H x 1 1/4"D
(2 Watt version shown.)

memories. A cloning feature duplicates favourite channels to another FT-51R.

A digital battery voltage display, five power output levels, the largest backlit dual band HT keypad made, Smart Mute™, two VFOs on both VHF and UHF, as well as available 2 Watt and 5 Watt versions, round out the exciting FT-51R. Plus, the optional MH-29A2B Display Microphone allows you to control volume and also access Memory, VFO, Call Channel, Band Selection and scanning functions. All of this in world's smallest dual band HT radio!

See the FT-51R with "windows" at your Yaesu dealer today!

"I use the Spectrascope to find new contacts faster."

"Yaesu did it again!"

Specifications

- Frequency Coverage
VHF RX: 110-180 MHz
TX: 144-146 MHz
UHF RX: 420-470 MHz
TX: 430-440 MHz
- Spectrascope™ Display
- Scrolling User Help Menu
- Alpha-Numeric 8 Character Display
- Up/Down Volume/Squelch Controls & Display
- Selectable Sub-Band TX Mute
- Automatic Tone Search (ATS)
- Digital Battery Voltage Display
- AM Aircraft Receive
- Scanning Light System (SLS)
- 120 Memory Channels (80 w/Alpha-Numeric)
- Large Backlit Keypad & Display
- Automatic Repeater Shift (ARS)
- Multiple Scanning Modes
- 3 Selectable Scan Stop Modes with Scan Skip
- User selectable lock function w/15 combinations
- Automatic Power Off (APO)
- TX/RX Battery Savers Built-in
- Handy Cloning Feature
- 5 Selectable Power Output Levels
- Message system with CW ID
- Selectable RX Smart Mute™
- Cross-Band & One-Way Repeat Functions
- DTMF Paging/Coded Squelch Built-in

Accessories

Consult your local dealer.

YAESU

Performance without compromise.™

YAESU UK LTD. Unit 2, Maple Grove Business Centre, Lawrence Rd., Hounslow, Middlesex, TW4 6DR

Specifications subject to change without notice. Specifications guaranteed only within amateur bands. Some accessories and/or options are standard in certain areas. Check with your local Yaesu dealer for specific details.

practical Wireless

NOVEMBER 1995 (ON SALE OCTOBER 12)
VOL. 71 NO 11 ISSUE 1064
NEXT ISSUE (DECEMBER)
ON SALE NOVEMBER 9

EDITORIAL & ADVERTISEMENT OFFICES

Practical Wireless
Arrowsmith Court
Station Approach
Broadstone
Dorset BH18 8PW
☎ (01202) 659910
(Out-of-hours service by answering machine)
FAX (01202) 659950

PW's Internet address is:
@pwpub.demon.co.uk You can send
mail to anyone at PW, just insert their
name at the beginning of the address,
e.g. rob@pwpub.demon.co.uk

Editor

Rob Mannion G3XFD

Technical Projects Sub-Editor

NG ("Tex") Swann G1TEX

Production/News

Donna Vincent G7TZB

Editorial Assistant

Zoë Shortland

Art Editor Steve Hunt

Page Layouts Jon Talbot & Marcus Hall

Advertisement Manager

Roger Hall G4TNT

PO Box 948

London SW6 2DS

☎ 0171-731 6222

Mobile (0585) 851385

FAX 0171-384 1031

Advert Sales and Production (Broadstone Office)

Lynn Smith (Sales),

Ailsa Turbett G7TJC (Production)

☎ (01202) 659920 - 9.30am - 5.30pm

FAX (01202) 659950

CREDIT CARD ORDERS

☎ (01202) 659930

(Out-of-hours service by answering machine)

FAX (01202) 659950

Front Cover Photograph courtesy of: Lee Farrant

Copyright © PW PUBLISHING LTD. 1995. Copyright in all drawings,
photographs and articles published in *Practical Wireless* is fully protected
and reproduction in whole or part is expressly forbidden. All reasonable
precautions are taken by *Practical Wireless* to ensure that the advice and
data given to our readers are reliable. We cannot however guarantee it and
we cannot accept legal responsibility for it. Prices are those current as we
go to press.

Published on the second Thursday of each month by PW Publishing Ltd.,
Arrowsmith Court, Station Approach, Broadstone, Dorset BH18 8PW. Tel:
(01202) 659910. Printed in England by Southampton (Web Offset) Ltd.
Distributed by Seymour, Windsor House, 1270 London Road, Norbury, London
SW16 4DH. Tel: 0181-679 1899, Fax: 0181-679 8907, Telex: 8812945. Sole Agents
for Australia and New Zealand - Gordon and Gotch (Asia) Ltd., South Africa -
Central News Agency. Subscriptions INLAND £22, EUROPE £25, OVERSEAS
(by ASP £27, payable to PRACTICAL WIRELESS, Subscription Department,
PW Publishing Ltd., Arrowsmith Court, Station Approach, Broadstone, Dorset
BH18 8PW. Tel: (01202) 659930. PRACTICAL WIRELESS is sold subject to the
following conditions, namely that it shall not, without written consent of the
publishers first having been given, be lent, re-sold, hired out or otherwise
disposed of by way of trade at more than the recommended selling price
shown on the cover, and that it shall not be lent, re-sold, hired out or
otherwise disposed of in a mutilated condition or in any unauthorised cover
by way of Trade, or affixed to or as part of any publication or advertising,
literary or pictorial matter whatsoever. *Practical Wireless* is
Published monthly for \$45 per year by PW Publishing Ltd.,
Arrowsmith Court, Station Approach, Broadstone, Dorset
BH18 8PW. Royal Mail International, c/o Yellowstone
International, 27 Burleigh Court, Hackensack, NJ 07601. UK
Second Class Postage paid at South Hackensack. Send USA
address changes to Royal Mail International, c/o Yellowstone
International, 2375 Pratt Boulevard, Elk Grove Village, IL
60007-5837. The USPS (United States Postal Service) number
for *Practical Wireless* is: 007075.



CONTENTS November

9 EDITOR'S KEYLINES

Rob G3XFD outlines his thoughts on the style of
reviews carried in *PW*.

9 COMPETITION CORNER

Why not try your hand at our Wordsearch
competition this month - you could win a
subscription.

10 RECEIVING YOU

Readers have the chance to air their views.

12 NEWS '95

New products, information and views to keep
you up-to-date.

16 SUBS CLUB

This month you could save over £80 on an Alinco
DJ-S1EZA and this offer is open to non-
subscribers as well.

16 RADIO DIARY

Why not visit one of the many radio rallies - our
list will help you decide.

17 A COMPREHENSIVE COLLECTION

Rob Mannion G3XFD takes a look at series of
valve books.

17 ERRORS & UPDATES

Some amendments to the 'Key Project' originally
published in the June issue.

18 NOVICE NATTER

Elaine Richards G4LFM shares some more of the
'natterings' she's received this month.

20 CLUB SPOTLIGHT

Is your club 'spotlighted' this month?

25 REVIEW - THE YAESU FT-8500 DUAL-BAND TRANSCEIVER

Leighton Smart GW0LBI likes a challenge, so we
asked him to try out a mobile rig where all the
controls are on the microphone!



30 DXPERTISE WITH DEVEREUX

Mike Devereux G3SED shares his experiences of
being on the other end of a DX pile-up.

33 THE HIGH FLYER

Victor Goom G4AMW describes a simple DX
antenna.

35 CHASING THAT DX

Chris Page G4BUE says it's not difficult to break
the 100 countries barrier when DXing.

40 THE ST BRANDON DXPEDITION

Paul Fry G0FUS and Jacky Mandary 3B8CF unravel
the background behind a 3B7 DXpedition.

42 THE LEICESTER AMATEUR RADIO & COMPUTER SHOW FLOOR PLAN

Come and meet the *PW* and *SWM* teams at the
Leicester Show on October 20 & 21st.

46 REVIEW - THE YAESU FT-10R HAND-HELD TRANSCEIVER

Tex Swann G1TEX is given the chance to review
the latest hand-held from the Yaesu stables.

50 ANTENNA WORKSHOP

John Heys G3BDQ talks about the fact and fiction
surrounding tuned feeders.

52 PRACTICAL WIRELESS 1995 144MHZ QRP CONTEST RESULTS

Neil Taylor G4HLX presents the results of *PW*'s
own 'fun' contest.

56 THE PW DAVENTRY 7MHz RECEIVER PART 2

Dave Howes G4KQH describes the constructional
and assembly stages of the receiver.

62 BOOK BONANZA

The *PW* Book Service Department offers you the
chance to buy two popular publications at very
special prices.

63 EQUIPMENT SPECIFICATIONS

Ian Poole G3YWX begins to unravel and explain
the mysteries behind transmitter specifications.

64 HF FAR & WIDE

Leighton Smart GW0LBI's report shows there's
been a lot of activity on the h.f. bands recently.

68 VALVE & VINTAGE

Ben Nock G4BXD helps out in the 'wireless shop'
looking after the valved, vintage and military
equipment.

70 VHF REPORT

David Butler G4ASR takes a look at long
distance communications on the v.h.f. bands.

72 BITS & BYTES

Mike Richards G4WNC has details of more
Internet sites to look out for as well as all
the latest news.

73 BROADCAST ROUND-UP

Peter Shore rounds-up the latest broadcast
band news.

74 PACKET PANORAMA

Roger Cooke G3LDI has some disturbing
news for packet users.

75 BARGAIN BASEMENT

79 BOOK SERVICE

Place a book order for over £20 this month and
you receive a free copy of 25 Simple Shotwave
Broadcast Band Aerials.

83 ENDNOTES

News of what's coming in your favourite amateur
radio magazine next month.

84 ADVERTISERS INDEX

SMC, ARE & REG WARD

37 years and still Number 1

THIS MONTHS SPECIALS

FT-1000

Yaesu's flagship HF Transceiver

**only
£2899**



**save
£1100**

(not to be confused with the FT-1000MP Economy Model)

Rexon VHF/UHF HANDI'S

RL-102 VHF 138-174MHz

only £139

**save
£50**

RL-402 UHF 410-470MHz

only £149

**save
£50**



(both supplied C/W cell case antenna & hand strap)

HF TRANSCEIVERS

KENWOOD

TS-950SDX	list £3995	our price £3495
TS-870S	list £2399	our price £2199
TS-850S	list £1809	our price £1579
TS-850SAT	list £1959	our price £1699
TS-450S	list £1499	our price £1299
TS-450SAT	list £1649	our price £1439
TS-50S	list £1059	our price £929



YAESU

FT-1000	list £3999	our price £3399
FT-1000MP	list £2849	our price £2549
FT-990	list £2399	our price £2039
FT-990/DC	list £2099	our price £1779
FT-900	list £1399	our price £1189
FT-900AT	list £1599	our price £1359
FT-840	list £959	our price £819

ICOM

IC-775DSP	list £3699	our price £3239
IC-736	list £1969	our price £1719
IC-738	list £1649	our price £1439
IC-729	list £1325	our price £1175
IC-706	list £1195	our price £PHONE
IC-707	list £889	our price £775
IC-706	list £1195	our price £1075



VHF TRANSCEIVERS

ICOM

IC-820H	list £1795	our price £1569
IC-275H	list £1495	our price £1395
IC-281H	list £449	our price £399
IC-2000H	list £369	our price £329
IC-2340H	list £689	our price £599

KENWOOD

TS-790E	list £1959	our price £1699
TM-255E	list £949	our price £829
TM-455E	list £1059	our price £925
TM-733E	list £739	our price £645
TM-251E	list £419	our price £359
TM-702E	list £579	our price £519

YAESU

FT-736R	list £1999	our price £1699
FT-8500	list £749	our price £659
FT-5200	list £729	our price £619
FT-5100	list £679	our price £579
FT-2500M	list £399	our price £339
FT-2200	list £419	our price £355



VHF/UHF HANDI'S & PORTABLES

YAESU

FT-11R	list £324	our price £275
FT-41R	list £369	our price £315
FT-51R	list £529	our price £449
FT-416G	list £369	our price £249
FT-290R2	list £599	our price £509
FT-690R2	list £649	our price £549
FT-790R2	list £749	our price £625

ICOM

IC-Z1E	list £529	our price £459
IC-2GXE	list £255	our price £225
IC-2GXET	list £279	our price £229
IC-T22E	list £259	our price £229
IC-T42E	list £269	our price £269
IC-W31E	list £469	our price £419

KENWOOD

TH-79E	list £479	our price £419
TH-22E	list £254	our price £219
TH-42E	list £289	our price £249
TH-28E	list £319	our price £279
TH-48E	list £369	our price £319

STANDARD

C188	sale offer price	£169
------	------------------	------

On some items supplies are limited at our offer prices


BRAND NEW YAESU UHF COMERCIAL TRANSCEIVERS SUITABLE FOR CONVERSION FOR 70cm PACKET

Single channel ONLY £79



SMC-545LIN/B

2 channel ONLY £89

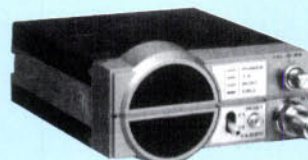

SMC-1045L2(B)

All sets supplied W/O mics. Mics are normally priced at £29. However, these are available for £10 if purchased with the transceiver. All sets supplied with conversion details XTAL specs. Matching base station power supply console only £29 (only when purchased with the transceivers).

SMC-307L1

Single channel xtal transceiver suitable for conversion to 4m 3watt output



only £49

W/O NICAD

All discounts are based on recommended retail prices.

CARR A = £2.50

CARR B = £5 (Handi's)

CARR C = £9.50 (Mobiles)

CARR D = £13.50 (Base Stations)

CARR E = £16.50

Cushcraft Antennas are one of the best range currently available. They offer superb performance, innovative design, excellent build quality and outstanding value for money.

HF Antennas

R5	10/12/15/17/20 vertical	£295.00
R7	10 thru to 40m vertical	£389.00
AV-3	14-21-28MHz vertical 4.3m long	£89.00
AV-5	3-5-7-14-21-28MHz vertical 7.4m long	£159.00
AP8A	8 Band Vertical	£199.00
APR18A	Radial Kit	£49.00
40-2CD	2-ele 40m Yagi	£469.00
A3S	14-21-28MHz Yagi	£349.00
A3WS	12/17m 3-ele Yagi	£275.00
A103	30m Extension A3WS	£115.00
204CD	4 ele 20m Yagi	£469.00
154CD	4 ele 15m Yagi	£279.00
D4	Dipole 10/15/20/40m	£249.00
D3W	Dipole 12/17/30m	£189.00
A4S	3-4 ele Yagi 10/15/20m	£439.00

VHF Antennas

AR-270	2/70 Dual Band Vertical 1.13m long	£65.00
AR-270b	2/70 Dual Band Vertical 2.3m long	£89.00
AR2	2m Vertical 1.2m long	£35.00
AR6	6m Vertical 3.1m long	£59.00
A148-10S	2m 10-ele Yagi 13.2 dBd	£65.00
A144-20T	2m 10-ele Cross Yagi 12.2 dBd	£99.00
13B2	13-ele 2m Yagi	£99.95
17B2	17-ele 2m Yagi	£189.00
A50-3S	3-ele 6m Yagi	£75.95
A50-5S	5-ele 6m Yagi	£149.00
A50-6S	6-ele 6m Yagi	£229.95
424B	24-ele 70cms Yagi	£115.00
22XB	2m 22-ele Yagi c/w polarization switching	£229.00
738XB	70cms 38-ele Yagi c/w polarization switching	£199.00

AEA TNC's and Data Modems

PK12 – A new VHF TNC that offers superb performance and simplicity of operation.
ONLY £119.00 INC Carr B

PK12/100K – 100k Mail Drop Memory Upgrade **£47.00 Carr A**

PK232/MBx – An old favourite that still offers state of the art performance.
BETTER VALUE THAN EVER AT ONLY £299.00 INC Carr C

PK900 – Deluxe multimode data terminal
ONLY £459.00 INC Carr C

PK96 – 9600 Baud packet TNC with 14K of mail drop memory. **£189.00 INC Carr B**

PAK WIN – Windows based S.W. programme
ONLY £79.00 INC Carr A



HOKUSHIN ANTENNAS

HS-702S	2M/70CM Whip BNC	£12.50
HS430	5 1/2 Wave Whip BNC	£8.50
88F	2M 8/8 Wave Mobile Whip	£16.50
VM-727RS	2M/70CM Mobile Whip	£32.00
HS-727SS	2M/70CM Mini Mobile Whip	£17.00
EX104B	2M/70CM Mini Mobile Whip	£22.50
SMC12SE	12M Mobile Whip	£16.50
SMC15SE	15M Mobile Whip	£16.50
SMC17SE	17M Mobile Whip	£16.50
HF3	12/17/30 Base Vertical	£59.00
28HS2HB	10M 2EL ZL Beam	£65.00
HS-GP62	2 X 3/4 Base Colinear	£65.00
GP23	3 X 3/4 Base Colinear	£39.00
SQ44	2M SWISS QUAD	£45.00
WX1	2M/70CM Base Colinear	£75.00
WX2N	2M/70CM Base Colinear	£99.00
WX4N	2M/70CM Base Colinear	£129.00
WX6S	2M/70CM Base Colinear	£189.00

HOKUSHIN MOBILE ANTENNA MOUNTS

GCCA	Gutter Clip & Cable	£19.50
SOCA	4M Cable Assembly	£11.50
SOCAL	6M Cable Assembly	£12.50
HS-TMK	HD Boot Mount & Cable	£19.50
EM-B7	Mini Hatch Mount & Cable	£29.00
BM3	Mini Mount	£14.00
BSD	Bumper Strip Mount	£12.00
FB4N	Cable Assembly Low Loss 'N'	£14.50
SFA-4N	Cable Assembly Very Low Loss 'N'	£25.00
GCD	Gutter Mount	£9.00

SEE YOU AT THE LEICESTER SHOW STAND S8
At this years show we have limited stocks of some of our monthly specials. If you missed one of our offers it could be your lucky day



ANTENNAS

HF	Carr.		
714X-3	3-4 ele Yagi 15-20-40m 3Kw PEP	£1369	E
CD218	3 ele Yagi 10-15 1.5Kw PEP	£289	D
CD318JR	4 ele Yagi 10-15-20m 750w PEP	£439	D
CD318	4 ele Yagi 10-15-20m 2Kw PEP	£539	D
CD318B	5 ele Yagi 10-15-20m 2Kw PEP	£589	D
CD318C	6 ele Yagi 10-15-20m 2Kw PEP	£899	D
CL10	5 ele Yagi 10m 2Kw PEP	£299	D
CL15	5 ele Yagi 15m 3Kw PEP	£450	D
CL4B-4	3 ele Yagi 40m 4Kw PEP	£1375	E
CV730V-1	V-Dipole 10-15-20-40m 1Kw PEP	£199	D
CY103	3 ele Yagi 10m 2Kw PEP	£179	D
CY104	4 ele Yagi 10m 2Kw PEP	£239	D
CV48	40m Vertical 2Kw PEP	£275	D
AD385	40/80m Switch box for CV48	£69	B
CLP5130-1	Log periodic, 50-1300MHz, 25 element, LE 3.0m B 2.0m	£299	C
CLP5130-2	Log periodic, 105-1300MHz, 20 element, LE1.4m B 1.4m	£199	C
CLP5130-3	Log periodic, 90-220MHz, 12 element, LE 1.6m B 1.7m	£169	C
CL6DX	6m 6 element yagi 13dbi, B 5.8m	£199	D
CL6DXX	6m 7 element yagi 14dbi, B 7.2m	£219	D
CL6DXZ	6m 8 element yagi 14.5dbi, B 9.5m	£199	D

MORSE KEYS

HK702	Straight key, 1Kg adjustable tension and contacts	£46.00	B
HK706	Straight key, 0.5Kg adjustable tension and contacts	£29.00	B
HK707	Straight key, 0.5Kg similar 706 with cranked arm	£35.00	B
HK808	Straight key 2.5Kg deluxe marble plinth	£110.00	B
HK711	Straight key, knee mounting	£36.00	B
HK802	Deluxe straight key, bearing less solid brass construction	£82.00	B
HK803	Brass high deluxe telegraph key c/w base plate	£77.00	B
HK804	Brass high deluxe telegraph key w/o base plate	£82.50	B
MK702	Single lever paddle 1.0Kg	£34.00	B
MK704	Squeeze key 0.15Kg	£42.00	B
MK706	Squeeze key 0.7Kg	£34.00	B



ANTENNA ROTATORS

G-400	Medium duty rotator	£199.00
G-400RC	R/C version of G-400	£239.00
G-600RC	H/D version of G-400RC	£339.00
G-450XL	New medium duty model	£269.00
G-650XL	New H/D version of G-450XL	£369.00
G-800SDX	450° deluxe model	£419.00
G-1000SDX	H/D version of G-800SDX	£479.00
G-2700SDX	H/D rotator 450°	£899.00
G-500A	Elevation rotator	£279.00
G-5400B	AZ/EL rotator	£519.00
G-5600B	AZ/EL rotator H/D	£599.00
RC5-1	Medium duty create	£329.00
RC5-3	Medium duty + preset	£439.00
RC5A-3	H/D v/speed + preset	£659.00
RC5B-3	V H/D v/speed + preset	£989.00
GS038b	Lowes clamp G-400, 800, 1000	£25.00
GSQ38G	Lowes clamp G-600	£25.00
MC /2	Lowes clamp create	£49.95
GS-050	Rotary bearing up to 1 1/8 mast	£29.00
GS-065	Rotary bearing 2" mast	£45.00
CK46	Create rotary bearing 2" mast	£57.00

Rotators carr D. Accessories carr B

Showroom/Mail Order 9.30-5pm, 9-1pm Sat. Tel: (01703) 251549.

SMC Ltd HQ Southampton: S M House, School Close Chandlers Ford Ind Estate, Eastleigh, Hants SO5 3BY. Tel: (01703) 255111 Fax: (01703) 263507

ARE Communications: 6 Royal Parade Hanger Lane, Ealing, London W5A 1ET. Tel. 0181-997 4476 9.30am - 5.30pm Monday-Friday 9.30am - 1.00pm Saturday

Reg Ward & Co: 1 Western Parade, West Street, Axminster, Devon EX13 5NY. Tel. (01297) 34918 9.00am - 5.15pm Tues-Sat

SMC (Northern): Nowell Lane Ind. Estate, Nowell Lane Leeds. Tel. (0113) 235 0606 9.30am - 5.00pm Monday-Friday 9.00am - 1.00pm Saturday

SMC Birmingham: 504 Alum Rock Road, Alum Rock, Birmingham B8 3HX. Tel. 0121-327 1497 9.00am - 5.00pm Tuesday - Friday 9.00am - 4.00pm Saturday

Carriage: Base Antennas £9.50. Mobile Antennas £5.00. Station Accessories £5.00

SUMMER 1995 CATALOGUE



The Summer '95 edition has 280 pages packed with over 4000 products and now with news and features including a full construction project.

- ▶ The computer section is greatly increased with new ranges of equipment and accessories for PCs including:
 - Mother boards, CPUs and SIMMs
 - CD ROM drives and hard drives
 - Sound cards, I/O cards, disc drive cards and video cards
 - Mice, trackballs and joysticks
 - Power supplies and cases
- ▶ Feature project for an EPROM programmer
- ▶ New 20MHz 'scope from Leader, training systems from Flight and an extended range of mobile phone batteries and accessories from Uniross
- ▶ Latest addition from Velleman kits including a video digitiser card
- ▶ 280 pages, 26 sections, over 4000 products from some of the worlds finest manufactures and suppliers
- ▶ Available at most large newsagents, from 13th April, or directly from Cirkit
- ▶ **Send for your copy today!**

£1.95
+ 30p p&p

Cirkit



Cirkit Distribution Ltd

Park Lane · Broxbourne · Hertfordshire · EN10 7NQ
Telephone: 01992 448899 · Fax: 01992 471314

BUY SMART

SG-230 Smartuner®


Antenna Coupler

SSB, AM, CW & DATA

You can't buy a smarter tuner than this. An automatic antenna coupler so intelligent it precisely tunes any length antenna - 8 to 80 ft - in the HF band.

The Smartuner® automatically evaluates and switches 64 input and 32 output capacitance combinations, plus 256 inductance combinations in a "pi" network. The amazing result is over a half-million different ways to ensure a perfect match for your transceiver. And the most intelligent feature of all is that the Smartuner remembers the chosen frequency and tuning values, and will automatically reselect those values - in less than 10 ms, each time you transmit on that frequency.

The SG-230 Smartuner®.
Buy smart.

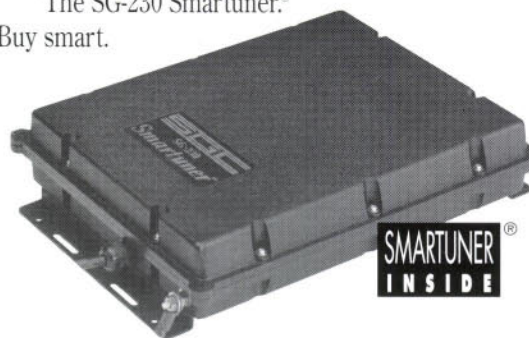

MICROPROCESSOR CONTROLLED • NON-VOLATILE MEMORY
WATERPROOF • B.I.T.E. INDICATOR • 1.8 TO 30 MHZ RANGE
10 TO 150 WATTS INPUT POWER • 10ms RETUNING TIME
8 to 80 ft. ANTENNA (all types)

SGC

NO COMPROMISE
COMMUNICATIONS



SGC INC. SGC BUILDING P.O. BOX 3526 BELLEVUE, WA 98009
TEL. (206) 746-6310 FAX: (206) 746-6384

**For all its class-leading
features, there's something
missing.
Interference.**



Kenwood's TS-870S gives you something called an Intelligent Digital Enhanced Communications System.

Or to put it another way, you can talk to someone halfway round the world and it'll feel like they're in the room with you.

If you've never tried a digital HF transceiver before, you won't believe just how well the TS-870S can find a signal that's almost buried in noise. And because it's made by Kenwood, reliability can be taken for granted, too.

Features? High frequency DSP for post-IF signal processing, high-speed PC control, automatic antenna tuner, a built-in K1 LogiKey for a full range of CW operations features, 100 memory channels...and that's just a taste. Your nearest dealer has the full specification.

Best of all, the TS-870S gives you all this at a price that's amazing value. So you can talk to the world without getting any interference. Even from your bank manager.

KENWOOD

For more information on the TS-870S phone 01923 212044.

THE BANDIT



PHONE US FOR PRICES ON ALL K

The JPS ANC4 is one of the most impressive products that we have sold for a long time. It connects between your transceiver and the antenna and nulls out all local noise including computer and TV timebase hash. You have to hear it to believe it!

Call or write to us for a copy of an independent review.



only **£189**

LOOKING FOR AN HF ANTENNA BEFORE WINTER?

WE STOCK A LARGE RANGE:-

Chelcom Verticals
Chelcom wire antennas
Cushcraft Verticals
Hygain Beams
Hygain Verticals
Butternut Verticals
Hygain rotators
Emoto rotators
Yaesu rotators

Ask for our HF antenna pack

VHF SWR METER

125-525MHz. 5/20/200W

£69.95

Average and PEP reading



NEW! Hygain DX77

Advanced Vertical Windom.

10-40m including WARC.

NO RADIALS. 29 feet high.

only **£275**

SEND FOR A LEAFLET

THE NEW KENWOOD TS870S

is now in stock

- Fully DSP at IF stage
- Built in RS232 control
- Auto ATU as standard
- Built in K1 LogiKeyer
- Successor to the famous TS850



Phone for best price

Vårgårda Radio AB

Call us on (01629) 580800
and we will send you full details of the
top quality v.h.f. antennas from
Vargarda of Sweden.

ADI 2m and 70cm hand-helds
IN STOCK NOW

NEEDLESS TO SAY, ALL ITEMS ARE SOLD WITH THE FULL WARRANTY AND FAMOUS LOWE BACKUP. ALL PRICES INC VAT. NEXT DAY DELIVERY £10 EXTRA. VISA/MASTERCARD WELCOME. CASH EVEN WELCOMER! CHEQUES AS WELL.

BERKSHIRE

3 Weavers Walk
Northbrook Street
Newbury
Tel: (01635) 522122

NORTH EAST

Mitford House
Newcastle Int. Airport
Newcastle Upon Tyne
Tel: (01661) 860418


WALES & WEST

79/81 Gloucester Rd
Patchway
Bristol
Tel: 0117-931 5263

SOUTH EAST

High Street
Handcross
West Sussex
Tel: (01444) 400786

SEE US AT THE LEICESTER SHOW



Lowe
Chesterfield Road, Matlock,

PHONE FOR
A COPY OF OUR
GREAT WEEKLY
SECOND-HAND
LIST

IS BACK

KENWOOD AND YAESU TRANSCEIVERS

We now stock GPS!

Latest GPS2000 personal navigator from Magellan.

- Smaller than a 2m handheld
- Tracks up to 12 satellites
- 15 metre accuracy
- 17 hour battery life

You'll be lost without it!

only £199



NEW FROM YAESU – THE FT1000MP



- Enhanced DSP
 - Collins filters
 - Auto seeking notch filter
 - Built-in Auto ATU
- Phone for best price**

NEW

2M linear amp bargain

- Up to 5W in
- 80W out
- GaS fet pre amp
- SSB or FM

only £139

VIRTUAL CYBERSPACE CLEARANCE SALE

Look at our WWW site (address below) for our super clearance list of bits and pieces

SHOPPING FOR A NEW RIG?

PHONE US FOR BEST
PRICES ON ALL
REPUTABLE BRANDS

Call at your local Lowe shop for Watson aerials

TRIED & TESTED

The WEP300 is a really well styled clip-on earphone that goes round your ear - not in it!

ONLY £9.95.

Call us for a leaflet.

Lowe Electronics are sole UK distributor for Kantronics, the world leaders in packet equipment. See the Kantronics range on demo at your nearest Lowe shop.

THE FAMOUS MANSON EP925 - BACK IN STOCK

Ring us for details.

- * 3-15V d.c.
- * 25A
- * 30A peak
- * Cooling fan
- * Full metering



Buy the best - forget the rest!

All this for only **£99.95**

**KENWOOD
MAIN
DEALER**

**ALINCO
STAR
DEALER**



YORKSHIRE

12 Station Road
Crossgates
Leeds
Tel: 0113-232 8400

SOUTH WEST

117 Beaumont Road
St. Jude's
Plymouth
Tel: (01752) 257224

EAST ANGLIA

152 High Street
Chesterton
Cambridge
Tel: (01223) 311230

SEE US ON THE WEB!



orders@lowe.demon.co.uk
info@lowe.demon.co.uk
<http://www.demon.co.uk/lowe/index.html>

Lowe Electronics

Derbyshire DE4 5LE Tel: (01629) 580800 Fax: (01629) 580020

01702
206835

Waters & Stanton

Spring 1996 Catalogue 128 Pages £1.50

Our Spring 1996 catalogue will be published in November. 128 pages packed with Ham Radio products and accessories plus interesting articles and technical information.

To order by post:
Send £2 in stamps, cheque or quote credit card number

DX-70 HF + 6M Transceiver



100 Watts of pure brilliance! If you are serious about a compact HF mobile then this has to be your choice. FREE built-in narrow filters for SSB and CW. No wasted money on mediocre 2 metre performance - just pure engineering genius - phone for the colour brochure. List Price £1,095



DJ-G5 2m / 70cms



Includes a host of exciting features. You get CTCSS built-in, 200 memories as standard and a wideband receiver covering 108-174 / 420-470 / 800-950MHz. You'll love its compact size and its electronic vol. / squelch controls. Send today for full details of tomorrow's handheld.

Retail **£479**

*£179 based on PX deals
Between £200 to £300 for your old dual bander. Up to £200 for your old single bander. Your old handheld could be worth more than you think. Call for a quote.

Examples:

TH-78 Good condition & complete £300
DJ-580E Good condition & complete £280



DR-610 2M & 70CMS
50 Watts 2m 35 Watts 70cms
AM/FM Wideband Receive
120 memories CTCSS



The best dual band mobile we know of. Extremely compact and very easy to use.

ICOM IC-706 HF to 2 Metres



A nice little rig that does everything - you'll have to read the handbook though because there aren't many knobs on the front - if you want everything in one box go for this - if you want the best in hf compact mobile and operate CW, go the DX-70.

Yaesu FT-1000MP



Kenwood TS-870



WATSON Power Supplies

3 Amps to 30 Amps - All EMC tested!



W-3A 3 Amp 12V current/volt protected **£22.95**
W-5A 5 Amp 12V current/volt protected **£29.95**
W-10A 10 Amp 12V current/volt prote **£49.95**
W-10AM 10 Amp 3 - 15V variable **£59.95**



W-20AM 20A variable twin meters **£89.95**
W-30AM 30A variable twin meters **£119.95**



The Ones Tuned For the UK Bands!

No other range offers the same value or the performance!

Mobile Models

W-285 2m 5/8th 3.4dB 200W **£15.95**

W-770HB 2m/70cm 3/5.5dB 200W **£24.95**



Hatch/Trunk Mount W-3HM




Thumb wheel adjustable black stainless steel

5 metre cable kit W-3CK



Low loss 5D cable with 30cm PTFE pigtail PL259/SO-239


Base Station 2m/70cms Fibre Glass - 2" Mast fittings

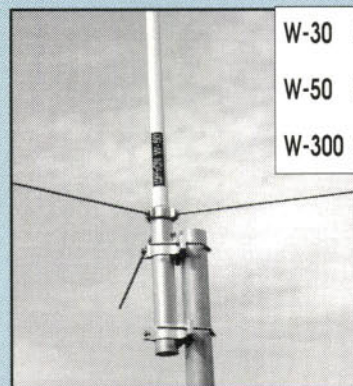

W-30 £39.95
W-50 £54.95
W-300 £69.95

W-30 2m/70cms 3/5dB 1.15m **£39.95**
W-50 2m/70cm 4.5/7.2dB 1.8m **£54.95**
W-300 2m/70cm 6.5/9dB 3.1m **£69.95**

Price Match



YAESU MASTER DEALER
KENWOOD
Main Dealer
ICOM

We'll match or beat our competitors advertised prices on genuine new UK stock. Just give us a call and quote their current advert and magazine - it's that simple! G3QJVG0PEP

Shop and Mail Order; 22, Main Rd., Hockley, Essex. SS5 4QS Tel: (01702) 206835 Fax: 205843
VISA Branch Shop: 12, North Street, Hornchurch, Essex. RM11 1QX Tel: 01708 444765 **ACCESS**
MAIL ORDER To Hockley - 24 Hour Answerphone and Fax. Open 6 Days 9am - 5.30pm

EDITOR'S Keylines

In his 'RY' letter, basically speaking, **Russell Ware G7PRD** takes *PW* to task in the way we (and other magazines) undertake equipment reviews. And, although I cannot think of a way to (fairly) implement Russell's idea, I think his suggestions (see 'Receiving You' under 'Comparative Reviews') are interesting.

To 'set the scene', I'd better outline my thoughts on the style of reviews in *PW*. Firstly, in practice, equipment reviews can only be the **opinion** of the reviewer. The opinions formed are backed up by the information (mostly in the form of specifications) provided by the manufacturer. These can either reinforce the reviewer's own measurements or can be used unchallenged and marked 'Manufacturer's Specifications'. (Incidentally, wherever possible we check the specifications, but due to the very short time equipment is available for review, this may not be possible).

Comparative Reviews

If 'comparative reviews' are to be done...surely it must be a comparison to a 'standard receiver or transmitter'? And, I think that a transceiver review which only compares specifications (boring and un-helpful) or the reviewer's experiences on another transceiver, can only be helpful **if the reader is familiar** with the comparison equipment.

The nearest I get to comparing one transceiver against another, is by doing so with equipment

from the same manufacturer because they tend to use the same techniques and methods.

In my opinion, comparing equipment 'from the same stable' provides a fair comparison and provides a 'standard' of sorts. However, at the 'top end' of the market nowadays standards are becoming so high that comparison (specifications wise) are starting to become meaningless. So, it's back to opinions again!

I've often been challenged on our review policy during club visits. Fortunately, although readers may doubt the way we carry out reviews, they do not doubt our integrity. Reviewers (including myself) **never** have pressure applied 'to do a good review' and in all honesty I can firmly state that I've **never** been approached in an underhand or dishonest way even though our reviewer's comments and opinions have been disputed by suppliers/dealers.

Manufacturers (and their dealers) often disagree with what we say, but to be fair...they never say 'you must not print that'. However, to be fair in return, I've provided the 'reply panel' facility which some manufacturers/dealers use occasionally in our reviews. Occasionally, someone suggests we

adopt the review approach used in the motoring press. However, in my mind that technique is flawed (when applied to radio equipment reviews) for the following reasons: **A**, many more drivers can (and have) tried 'basic' cars and can easily compare them by driving. They can also get reasonable access to many other vehicles for 'test drives' and can often have them on trial for a day or so. **B**, it's easier (in my opinion!) to evaluate a car! You quickly find out if it 'feels right' for you, corners well, is quiet or noisy or economical (or otherwise).

An Opinion

Having stated my reasons for not using the 'comparison approach', it's still obvious that when it comes to making a decision, we have to rely on an opinion, whether it be our own or that of a magazine review author. But if **you** feel we **should** provide a comparison, please write to me and suggest a 'standard' comparison transceiver (or separates) we could use in reviews. I'll be very interested to see readers' suggestions!

Finally, we really do our utmost to be critical and honest in our reviews, but would appreciate any suggestions or ideas to improve them. In this case we need **your opinions**!

I'm pleased to say I'm visiting the Stockport Club in November, to provide a special talk. I wonder if the 'questions & answer' session afterwards will focus on *PW* reviews?

Rob Mannion G3XFD

COMPETITION CORNER WORDSEARCH

E V Z N D S A N U T K Z V G F W
U E Z D X E R Z N S P L X N M N
L T T J G K H Q D S E Y D I S O
J P A C K E T A X Q W A B T Y I
I U D C I Z V P F R D C Y A Z T
A A K J H E Y M E P P S S R W I
M C N P N V Y T D V L E V E P D
A L K T Y K S X X G F U K P D E
R T R E E E N W I G U C Z O C P
O Y D U C N E C O T B I H D P X
N R F I D I N T N R D Z W T D D
A Q E K O P Q A O M K Z U F M Y
P L G S W G O R E L Y S S D I B
W B S Y L A P T L Y R Q H H X Z
E K X Q R P G A U B Y I O O O T
U U E C B C D X K W P E A U P W

Wordsearch rules:

Twelve different words have been hidden in the letter grid. They have been printed across (forwards or backwards), up and down, diagonally, but they are always in a straight line without odd letters between. You can use the letters in the grid more than once for different words. Once you have found all 12 words, mark them on the grid and send it, along with your name and address (photocopies accepted with the corner flash) to our editorial address, marked 'Competition Corner' Wordsearch November 1995.

Name.....
Callsign.....
Address.....
Postcode.....

Send your entry (photocopies acceptable with corner flash) to: **Wordsearch Competition, November 1995, PW Publishing Ltd., Arrowsmith Court, Station Approach, Broadstone, Dorset BH18 8PW.** Editor's decision on the winner is final and no correspondence will be entered into.

FIRST PRIZE: A year's subscription to *Practical Wireless* or a £20 book voucher.

SECOND PRIZE: A six month subscription to *Practical Wireless* or a £10 book voucher.

☐ SUBSCRIPTION ☐ VOUCHER

Entries to reach us by Friday November 17 1995.

Words To Find:

ANTENNA
DXER
LEICESTER
PACKET
QRP
WORKSHOP

DAVENTRY
DXPEDITION
OPERATING
PANORAMA
SHOW
YAESU

Please send your letters to the Editorial offices in Broadstone. Reader's letters intended for publication in 'Receiving You' must be original and not be duplicated. Letters are accepted on the understanding that they have only been submitted to *Practical Wireless*. Please ensure that your letter is clearly marked 'for publication in Receiving You' and that it has not been submitted to other magazines. We reserve the right to edit or shorten any letter. The views expressed in letters are not necessarily those of *Practical Wireless*.

RECEIVING *You*

The Star Letter will receive a voucher worth £10 to spend on items from our Book or other services offered by *Practical Wireless*. All other letters will receive a £5 voucher.

STAR LETTER

Aerials & Antennas

Dear Sir

The first thing I learnt on John Beaumont G3NGD's RAE course was that radio enthusiasts use aerials. It is the insect world that use antennas. I have often wondered why it is only Waters & Stanton who sell aerials in *PW*. Then, in September's issue, I found the answer in the article 'Wooding's World' (nice chap Mike Wooding. I had the pleasure of sharing a few pints with him at the BATC Convention last year!).

It appears that it is all the fault of the Editor. I hold up my hands in disbelief! Was it not the Editor in 'Keylines' of that same issue that was complaining of the misuse of the bands "by 'pirates' and child-like legitimate operators". In 'Keylines' of November last year, the complaint was of the national press's misuse of the terms 'radio amateur' and 'radio ham'.

In his last paragraph, he says, and I quote, "We hope that our fellow journalists in the media will take notice and in the future at least attempt to provide accurate reports and avoid misleading their readers, viewers or listeners". After glancing at one of my copies of *PW* my wife has given me a book on Coleoptera and a subscription to *Scorpion Breeding For Fun*.

Seriously, it's a case of using words that journalists think will attract attention rather than using the correct one, for example, sophisticated, who first misused that one. In my dictionary it means 'all that is false!' and don't tell me that aerial is an old fashioned term, because the title of the magazine has not yet been changed to 'User Friendly Radio'. I will still buy *PW* and of course enjoy its contents. After translation that is!

John R. Ranson G7NND
Cheshire

Editor's defence: I plead guilty John...with mitigating circumstances! 'Antenna and antennas' are the style adopted on *PW* and *SWM* long before I joined and (apart from the historical articles in the magazine) we avoid the term 'aerial'. It's down to choice and that's what *PW* chose! Dick Ganderton G8VFH rushed off to get the dictionary and points out (correctly) that insects use *Antennae* (they always have two unless they've had an accident!) whereas *PW* uses 'Antenna and Antennas'. However, if anyone does meet an insect suitably equipped and on an amateur band...well try a QSO!

Candler Morse & Safety

Dear Sir

In July, I had an unfortunate accident when my Achilles tendon snapped and I have had my foot in plaster ever since. As I have a lot of spare time and being fairly immobile, I decided that it was now or never for passing the Morse test.

Since being licensed, I have made many attempts at the code. I remember and have used the records produced by G3HSC which you mentioned in your article in *PW* in the June Morse special issue. The Candler System is not dead either!

Although I do not have a machine as you described, I am working from a set of five written lessons written by Walter H. Candler! I use these in conjunction with my old Acorn Electron computer and a BBC basic Morse programme (on tape).

I am progressing and am very grateful to Charles G0VAE who locally has QSOs four nights a week with Roger G7UDR transmitting a wide variety of Morse practices which I have listened to. At the weekends, Frank G3FIJ takes over (two Elmer Nominees?). I am hoping to take the test in October.

On a different note, Elaine Richards wrote about safety in the March issue of *PW*. This cannot be understated and her article brought back sad memories of the father of a boy I was at school with, who died when solder went into his eyes and caused a blood clot with complications. Thanks for an interesting and varied magazine.

John Sones G8JBK
Colchester

Editor's comment: Best of luck with your leg and Morse test (in that order John). And perhaps a timely reminder that readers are welcome to nominate potential 'Elmers' by writing direct to Elaine Richards (details in 'Novice Natter').

Pirate Cards & Software

Dear Sir

Ref: 'Amateur Radio Image' (*PW* September) Whilst I respect Andy Emmerson's views expressed in his letter on the subject of 'pirate' cards and software on sale at recent rallies, we have to be careful in other respects also. Are we to take it that the RSGB and all other rally organisers will ban the sale of blank video and audio tapes on the grounds

they can be used illegally to tape record copyrighted music?

Similarly, should all scanning type equipments be completely removed from sale as they can be used to receive information that can be subsequently used in illegal activities, or even perhaps against the interests of national security?

Should Andy and myself

not be allowed to purchase h.f. transmitters if we hold only a v.h.f. licence? Should Class A licence holders not be allowed to buy h.f. transmitters with general coverage type transmit stages because it would be illegal to use them on those non-amateur frequencies?

And to come back to Andy's point about theft, should all BBSs be

immediately shut down because we now have the ability to download files of shareware that we might not register, but continue to use, as much a form of theft as any?

Mel Evans GM6JAG
Edinburgh

Editor's reply: Your comments please readers!

Brilliant Morse

Dear Sir

Over the years I have read, with interest, the words of those for and those against the Morse code. I do not wish to spark off any more arguments on the subject, but I felt to write this letter because of one of the most common reasons that those against the code give for its abolition, i.e. it's out-of-date and no longer has a place in the field of communication!

Imagine how surprised I was, whilst watching the recent BBC1 TV series about the life aboard HMS *Brilliant*, to see two of the world's most sophisticated warships communicating with each other not by Data-link or Satellite, not even by good old s.s.b., but by the 'old fashioned', 'out-

dated' Morse lamp!

It seems that even today in the 'high-tech', super sophisticated, digitally encoded world of ours that the only way to ensure complete secrecy when communicating between two ships at close range in secure waters by Morse code. Food for thought?

**Chris Carrington
GO1YZ**

Derby

Editor: I was also fascinated to hear all those Morse 'idents' from navigational beacons in the weapons control room on the HMS *Brilliant* series. Chris, Morse lives eh? (But I still couldn't read the lamp Morse, even when I slowed the video down. It's definitely an acquired skill!).

Scanners

Dear Sir

First of all I would like to thank you for producing such a great publication. I have been a reader of *PW* for about 17 months and a licensed radio amateur for about 12 months. The reason I write is in response to Mr Adam Page's (Radio Amateurs in the Press). Is it really illegal to use a radio scanner as Adam calls it? I find it very difficult to believe that when I use my MVT-7100 to listen to the h.f. bands and on 50, 70, 144 and 430MHz that I am in fact doing anything 'dodgy'.

I also find it totally unbelievable that everybody who has purchased a general coverage receiver, bought one just to listen to the police. I am sick to death with people with this kind of attitude, and even more so when I get stopped by the police, who take one look at my Icom IC-2340 and ask 'is that a scanner sir?' followed by a half hour examination of my car.

I really do think that people like Mr Page should think before saying things like 'nobody uses them (scanners) legally'.

Regarding his point about multi-modes CBs, would Adam prefer a radio amateur to convert one of these units for legal 28MHz or even transverting purposes? Or perhaps someone who has not learnt about EMC and other important topics included in the RAE, to be used on 25 to 28+MHz which most multi-mode CBs are capable of doing?

**M. Langford G7TDP
West Midlands**

Penny Pinching

Dear Sir

Have I missed something? Did the antenna guru's guru, Dr. John Kraus of Ohio State University change his callsign? The antenna named after him, using his callsign is the W8JK not the 'W8KJ' as in 'Pascoe's Penny Pinchers' (see *PW* August '95 p. 42). Otherwise, Dick Pascoe's article was a great job. 'Penny pinching' is something I had to learn as a youthful antenna builder....and still keep up the habit.

Thanks for carrying my two antenna books in your mailorder operation (*Joe Carr's Receiving Antenna Handbook* and *Practical Antenna Handbook* - 2nd Edition). Both are scheduled for new

editions in 12-18 months and will have a software diskette included.

I've included preliminary version of the software is my Antlers for Windows 2.00. A diskette is enclosed. I hope you find it interesting!

**Joe Carr K4IPV
USA**

Editor's reply: Sorry we got it wrong Joe! It's good to see that *PW* is read by antenna (or should that be 'aerial'?) enthusiasts on the other side of the Atlantic. We hope to review your new book and software soon.

Pirates & The Media

Dear Sir

The comments in the September issue of *PW* about pirates and the media who call anyone who uses radio equipment in a 'newsworthy' manner a 'radio ham', made interesting and timely reading. In my opinion, it is high time that the full weight of the law be applied to all who illegally use transmitting and receiving equipment.

The Wireless Telegraphy Act specifies that one may listen only to transmissions from 'authorised broadcasting stations and licensed radio amateurs'. This therefore excludes eavesdropping on cordless and portable telephones, police,

ambulance and fire services, ships, aircraft, etc.

Yet scanners are easily bought and used nefariously, other receivers specifically refer to 'airband'. As for transmitters, licensed amateurs are restricted in the r.f. power they may emit, yet one sees advertisements for linear amplifiers rated in kilowatts. Since these are on sale, presumably they are sold and used.

Why, oh why is it illegal to listen to non-authorised transmissions and to transmit with too-high power, is it permitted for shops to stock and sell, and for the buyers to own such equipment? It is

illegal for an ordinary citizen to own a gun without a licence and it is illegal for a shop to sell that gun to someone without a licence (or the ammunition for that matter), so why not have similar legislation as regards radio equipment?

It is useless having laws if they are not enforced. In days of yore amateur radio stations in Britain were frequently inspected by a Post Office official who arrived, without notice, to check that all was as it should be. Not so now, it seems, as my station was last inspected on July 6 1971!

**Walter Farrar G3ESP
Pontracft**

Comparative Equipment Reviews

Dear Sir

Having read *Practical Wireless* for some time, I feel compelled to write regarding what I feel is a major omission from the contents. Perhaps you may choose to include this letter in 'Receiving You' to discover if any other amateurs share my view?

We live in a society where most magazines dealing with technologically based hobbies, for example photography, hi-fi, computers, video, etc., make comparative tests of the available equipment. This type of report seems to be totally absent from

the amateur radio press.

Given the current flurry of new radios, particularly mobiles, which are offering all kinds of new features and much greater design variety, it would assist anyone considering such a substantial financial outlay if there were articles which directly compared their merits and failings.

I'm sure an article comparing, say the Kenwood TS-50, Yaesu FT-900, Icom 706 and Alinco DX70 would make very interesting reading! Most prospective buyers of a new radio equipment must currently be basing their decisions on

hearsay, salesman's patter, glossiness of brochures, etc. Why not step in and provide this valuable service for your readers?

**Russell Ware G7PRD
Stockport**

Editor: I think your suggestion is interesting, but would be very difficult to implement Russell! But rather than take up valuable space in 'Receiving You' I'm going to use my own allocation in 'Keylines' to reply. Please join me there after you've read the other letters of course!

Send in your news, photographs and product information to Donna Vincent G7TZB at the editorial offices in Broadstone.

NEWS '95

Callbook Software

The **GOLOV/G4LUE Amateur Radio Software** company of Barnsley have recently updated their UK callbook on disk to version 3, using data from the Radiocommunications Agency up to August 1 1995.

The GOLOV/G4LUE callbook includes details of 62000 UK amateurs and Novices, WAB information, European repeaters, beacons, mailboxes and nodes. A copy of version 3 of the GOLOV/G4LUE callbook will cost you **£12.50 plus £1.50 P&P** for new users or **£9.95** inclusive of P&P for registered users.

For more information contact **Ernie Bailey** on (0836) 748958 or **Nigel Horne** on (01226) 247753. E-mail: njh@smsltd.demon.co.uk

Morse At Martin's

Martin Lynch and his 'Mob' will, for the fourth time, be holding their annual Open Day. The event takes place on November 18 at their showroom at **140-142 Northfield Avenue, Ealing, London W13 9SB** and is being co-sponsored by Kenwood UK and the full range of Kenwood products will be on display, including the new DSP TS-870S.

For the first time at his Open Day, Martin will be offering visitors the chance to pay for and take a 12w.p.m. Morse Test on Demand thus enabling them to gain their Class A Licence. (Two passport sized photos required for identity). Also on offer throughout the day will be the chance to

buy radio equipment and accessories at very special prices, together with a wide spread of **free** food and drink for all visitors to enjoy.

Martin will be throwing open the doors to his showroom at 9.30am on November 18 and won't be closing them again until 6pm, giving you plenty of time to browse, pick-up a bargain, enjoy the food and perhaps take and pass your Morse!

So, if you're looking for a day-out why not do as Martin says and "Remember, Remember the 18th of November"? Go along to the Martin Lynch showroom and see what bargains you can find.

For more information contact Martin Lynch on **Tel: 0181-566 1120** or **FAX: 0181-566 1207**.

Young Amateur Of The Year

The Young Amateur of the Year Award for 1995 has been awarded to 16 year old **Leroy Kirby GW0ULC** from Cardigan, Dyfed.

Leroy was presented with his award together with the first prize of £300 by Roger Louth, the Radiocommunications Agency's Director of Mobile Services at the Radio Society of Great Britain's HF Convention on September 10 1995.

In addition to the first prize, Leroy also received a certificate signed by Ian Lang, the President of the Board of Trade. He was also invited on a conducted tour of the

Radiocommunication Agency's Monitoring centre at Baldock in Hertfordshire.

Leroy is an active member of his local amateur radio emergency service and has done much to promote radio through the Scout movement and more recently through the Air Training Corps. He also been involved in running a number of Special Event stations, including two which have been linked to the Jamboree on the Air.

Leroy's main area of interest is in packet radio. He has helped to set-up a new local Bulletin Board System as well as acting as the remote systems manager for a while.

The runners-up prize for Young Amateur of the Year was awarded to 15

year old **Charles Banner G7UBA** from Birmingham. Charles was also presented with his prize of £50 and an invitation to visit the Radiocommunication Agency's Monitoring centre at Baldock.

Charles is a GB2RS newsreader and has been involved in setting-up a number of Special Event stations. He is also currently helping to run a Novice licence training course and is assistant secretary of his school's amateur radio society.

The staff of *Practical Wireless* would like to extend their congratulations to Leroy and Charles and wish them all the best as ambassadors for amateur radio.

Electronics And Beyond

Maplin Electronics have recently launched their new 1996 catalogue entitled *Electronics And Beyond*. This full colour guide to the Maplin range of electronic products contains 1200 pages featuring over 3500 new products.


Maplin have completely revised the catalogue's layout so that it now includes a selection of fascinating facts sprinkled throughout its pages. Also included are 'life-style' products ranging from caravanning to navigation to an extensive range of computer products.

Electronics And Beyond features new products in every section and a new section entitled 'Education and Science' includes lasers, meteorological equipment, weather station, motors, gears, switches and gadgets. The catalogue also includes £50 of money saving vouchers with every copy.

Copies of Maplin's *Electronics And Beyond* are available for **£2.95** from Maplin stores, as well as many newsagents or by mail order for **£3.45** from **Maplin Electronics, PO Box 3, Rayleigh, Essex SS6 8LR. Tel: (01702) 554161**.



President of the RSGB Clive Trotman GW4YKL (centre) pictured with (L-R) Charles Banner G7UBA and Leroy Kirby GW0ULC at the Young Amateur of the Year presentation at the RSGB's HF Convention.

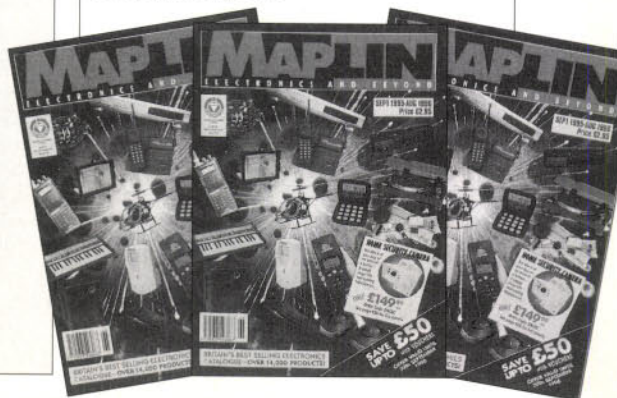

Tonna Visit

Back in July Waters & Stanton Electronics had a visit from **Frank Tonna F5SE** son of the founder (**F9FT**) of Tonna Electronique, the well known antenna manufacturer. Waters & Stanton, who have made a success of promoting the Tonna brand in the UK, are Tonna's largest customer and report that the range is well received in the amateur world because of its high quality and competitive pricing.

If you'd like details of the full Tonna range of products available you should contact Waters & Stanton on **(01702) 206835**.

(L-R) Jeff Stanton G6XYU, Frank Tonna F5SE and Peter Waters G30JV outside Waters & Stanton's head office on a very warm afternoon in July (note the shorts).



Open Forum

An Open Forum meeting will take place on October 28 at 2pm at Highland Region Council Local Authority Emergency Operations Centre, off MacIntosh Road, Inverness. The meeting will be open to anyone with an interest in Amateur radio and will be attended by Clive Trotman GW4YKL President of the RSGB, Peter Kirby G0TWW General Manager of the RSGB together with members of the RSGB Council.

Full details and directions are available from **Elaine Shread GM7TZZ, RSGB Liaison Officer, 15 Hardie Court, Aberchirder, Huntly, Aberdeenshire AB54 5TG. Tel: (01466) 780739.**

Competition Winners

August 1994 Cushcraft Competition

Winner: Rev. T. J. Walker G0TWE, Lincoln.
Runners-up: Manuel Laranjeira Veiga CT1AVR, Portugal; P. D. Bonson, Berkshire; B. W. Le Grys G3GOT; G. G. Millican, Northumberland; A. E. Collis, Devon.

September 1994 Spot The Difference

Winner: J. G. Van Gelder PA3ANF, Netherlands.
Runner-up: I. M. Thomson, Fife.

October 1994 Wordsearch

Winner: R. Makepeace, Essex.

Runner-up: D. Bancroft G3SAF, St. Albans.

November 1994 Spot The Difference

Winner: V. G. Saunderson G7PHJ, Cornwall.
Runner-up: T. Blewitt, Worcester.

December 1994 Wordsearch

Winner: John F. Piggott, Mid Glamorgan.
Runner-up: M. Williams, Lincolnshire.

January 1995 Spot The Difference

Winner: Brian A Goddard, Glos.

Runner-up: Chris Turner G7SJE, Kent.

February 1995 Wordsearch

Winner: P. Miseldine G7SQS, Peterborough.
Runner-up: J. Jones, Wiltshire.

March 1995 Spot The Difference

Winner: K. McIntosh, Dunbar.
Runner-up: G. G. Millican, Northumberland.

May 1995 Wordsearch

Winner: Ron Thayne, Cleveland.
Runner-up: T. Ibbittson, Wakefield.

Rutland Arrays

On September 1 this year Rutland Arrays was bought out by **G & P Engineering** of Virginia USA. The G & P Company specialise in design and engineering and have over 20 years working in the r.f. and satellite communications field.

Rutland Arrays was started and built-up by Thomas Rutland K3IPW in 1988 and the company became well respected for their designs, quality and service. Unfortunately K3IPW became a silent key earlier this year.

William Gamble of G & P

Engineering states that he will "continue Tom's work and give my assurance to the amateur community that the quality and service will remain". Even though G & P Engineering now owns Rutland Arrays the name will stay on the complete product line and the manufacturer of 50MHz, u.h.f. and v.h.f. antennas will continue.

To find out more about the range of Rutland Arrays you should contact **G & P Engineering, 109 Finch Court, Stephens City, VA, USA 22655-2461. Tel: 1-540 869 4530 or FAX: 1-540 869 5116.**

New 'M' Calls

As from April 1 1996 anyone applying for a full Amateur Radio Licence will receive a new 'M' callsign. This has been bought about because the 'G' series is rapidly running out of suitable combinations.

Existing 'G' callsign holders will be unaffected by the introduction of the 'M' series and will not be able to change to an 'M' call. Even where a licence has lapsed the holder of the 'G' callsign will still be able to apply for its re-issue.

Reservations for the new 'M' callsigns will be accepted from October 2 1995 while reservations for 'G' callsigns will continue to be accepted until March 31 1996. Reservations for callsigns should be made in writing to **Subscription Services Ltd. (SSL), PO Box 884, Bristol BS99 5LF.**

Enquiries regarding the new 'M' callsign series should be made to **Radiocommunication Agency's Amateur Radio Unit on 0171-215 2171.**

Southern Scanning & Shortwave Shop

Southern Scanning & Shortwave (SS&S) who held their official launch in January of this year have informed the 'Newsdesk' of the official opening of their new shop. **The Shortwave Shop, 18 Fairmile Road, Christchurch, Dorset BH23 2LL** will be opened on November 1 1995 at 2pm by **Rob Mannion G3XFD**. The telephone number for the shop will be **(01202) 490099**.

The Shortwave Shop will be open from 10.30am - 6pm Tuesdays to Saturdays, a late night will be held on Wednesdays when the shop will be open

from 2 - 8pm.

In the last year Southern Scanning & Shortwave have added Yaesu and Icom to their Kenwood dealership and can now supply most leading makes of new and used equipment available to the Amateur, s.w.l. and scanner enthusiast including air and marine band equipment. They also intend to extend their range to include a selection of starter kits and construction projects for the beginner as well as a range of components.

Another new venture for SS & S will be the addition of the Southern CB Centre which will be based at The Shortwave Shop and will offer a range of new and used CB equipment currently available in the UK.

Scandinavian Teleprinters Group

The **Scandinavian Amateur Radio Teleprinter Group (SARTG)** has appointed **Ingemar 'Smudge' Lundegard G3GJW** as the SARTG contact for the UK. Smudge is QTHR and can be contacted by 'phone or FAX on (01474) 853366 - preferably between 8 & 10pm.

HAYDON COMMUNICATIONS

H.F. TRANSCEIVERS & RECEIVERS

KENWOOD



TS-870S	New HF DSP.....	LOWEST IN UK
TS-450SAT	Special offer.....	£1099
TS-450	Special offer.....	£949
TS-50S	£1059	£Phone
R-5000	Comm receiver £1059	£869

YAESU



FT-1000 MP (DC)	New HF (EDSP).....	LOWEST IN UK
FT-1000 MP (AC)	New HF (EDSP).....	LOWEST IN UK
FT-990 DC	+ 2 free filters.....	£1599
FT-840	£949	£719
FRG-100	Comm rec £599	£449.95


ICOM

IC-706	£1199 + free PSU.....	£1099
IC-738	£1649	£1349
IC-775 DSP	£3699	£3099

ALINCO

DX-70 + free 30 amp PSU	£1099.....	£999
-------------------------	------------	------

HF ACCESSORIES



VC-300
300w ATU
£89.95

VC-300 DLP 300W ATU with dummy load

£129.95

STAR BUY P-2512

An incredible power supply!
25-30 amp cont. variable volts (3-15).
Dual meters (VS and amps).
Over voltage protected.



BIRTHDAY SPECIAL £79.95

TIMEWAVE AUDIO FILTERS

TIMEWAVE DSP-59 PLUS	£299.00	£275.00
TIMEWAVE DSP-9 PLUS	£239.00	£225.00
DATONG FL-3	£149.95	£139.95
MFJ-784B	£249.95	£229.95

RECEIVERS

DRAKE R-8A	New £1295	£1195
AOR 3030	£699	£639
NRD-535	£1699 1 ONLY.....	£1299

VHF/UHF HANDHELD TRANSCEIVERS



KENWOOD TH-79E

2m/70cms +
Ext Rx ~~£479~~..... **£379**

TH-28E	2m + Ext Rx £329	£269
TH-22E	2m £255	£215
TH-42E	70cms £269	£245

YAESU

FT-51R	2m 70cms £529	£395.95
FT-11R	2m £329	£239.95
FT-23R	2m Special offer £299	£199.95

ICOM

IC-Z1	2m 70cms det. front £529	£399.95
IC-T21	2m + wideband Rx £329	£229.95

ALINCO

DJ-G5	2m 70cms £479	£419.00
DJ-180	2m £229	£199.99
DJ-480	70cms £269	£239.00

ACCESSORIES

SPEAKER MICS (P&P £1.00)

MS-107	Fits Alinco/Yaesu/Icom.....	£14.99
MS-107 'K'	Fits Kenwood.....	£14.99
CT-221	Eartalker-Al/Ya/Ic.....	£24.99
CT-221 'K'	Eartalker-Kenwood.....	£24.99

HANDHELD AMP (P&P £2.00)

NB-30W	2m-1½ input/op up to 30W.....	£44.95
--------	-------------------------------	--------

SPEAKERS ETC (P&P £1.00)

TSA-6201	Deluxe spkr + vol Contl.....	£14.99
EP-300	Deluxe "over ear" ear piece.....	£9.95



MOUNTS (P&P £2.00)

MA-339 Mobile holder

Suitable for h/helds.....	£9.95
Q5-200 Air vent h/held holder.....	£9.99
Q5-300 Desk top + plug & socket holder.....	£19.99

HANDHELD ANTENNAS (P&P £1.00)



DB-770 'H' 2m/70cm. Tx
(3.4/5.5dB) BNC Telescopic (wideband Rx)

~~£24.95~~ **£19.95** **SPECIAL OFFER**



T-2602 2m/70cm/23cm. Tx (wideband
Rx) (2/3/5.5dB gain). Flexible antenna (14" long
BNC). Superb. **£22.95**

VHF/UHF MOBILES

KENWOOD TM-733



2m/70 + ext Rx £780	£599	SAVE £150
TM-251E	2m + ext Rx £419	
TM-451E	70cm + ext £459	
TM-255E	2m multimode.....	LOWEST IN UK
TM-455E	70cms multimode.....	
TS-790	2m/70 base.....	

YAESU

FT-8500M	New 2/70 £749	£639
FT-290RII	3m multi £599	£449
FT-2500	2m 50W £399	£319

ICOM

IC-200H	New 2m £389	£329
IC-820H	2/70 base £1795	£1499

ALINCO DR-130

SPECIAL PURCHASE!

2m FM mobile 50W
~~£369~~



£289.95		
DR-150	2m + ext Rx (9600Pk) £399	£339
DR-430	70cms (35W) £379	£349
DR-M06	6m (10W) £359	£299
DR-610	2m/70cms £729	£629

SWR METERS (P&P £4.00)



RS-402

125-525MHz (200)
FWD/REV/AVE/PEP

PWR + full SWR indication and meter
illumination. ~~£69.95~~

£59.95

SX-200	Diamond 1.8-200MHz £85	£74.95
SX-400	Diamond 140-525MHz £109	£84.95

TSA-6601

144-44MHz (60W) pocket
PWR/SWR meter

£34.95 (P&P £1.00)

TSA-6602 VHF/UHF ant matcher ~~£34.95~~ (P&P £1.00)

AEA PRODUCTS

PK-232 MBX	£229	£269
PK-12	£189	£109

COAX SWITCHES (P&P £2.00)

CX-401	4 way (SO-239).....	£39.95
CX-401 'N'	4 way (N TYPE).....	£49.95
CX-201	2 way (SO-239).....	£16.95
CX-201 'N'	2 way (N-type).....	£21.95

NB: ALL PRICES INCLUDE VAT

★ Outside office hours 0850 586313 ★ Mail Order: Same Day Despatch ★

SALES PHONE - 0181-951 5781/2

132 High Street, Edgware, Middlesex HA8 7EL
Close to Edgware underground station (Northern Line). Close to M1, M25, A406.




Fax: 0181-951 5782



★ OPEN:-
MON-FRI 10-6PM SAT 10-5PM



DELIVERY (UK MAINLAND) 24HR £10 / 48hr £7.50

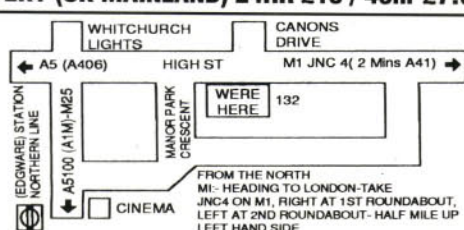



**WE'RE CELEBRATING OUR BIRTHDAY!
HUGE REDUCTIONS DURING OCTOBER.**

SEE YOU AT LEICESTER STAND NO E6

**SEE THE VIDEO AT THE LEICESTER SHOW ON OUR STAND - SHOWING ALL DAY
NEW OPTO-SCOUT VERS 3.1. SEE BEFORE YOU BUY!!**

We have a VHS Video demo tape showing the Opto-Scout being used to its full potential. This video is available on **FREE LOAN**, all we require is £10 deposit (refundable) + £2 P&P and we'll send you a copy. You return the tape when you've watched it and we'll refund your £10. (Provided the tape is returned undamaged). Alternatively - order a Scout from us and we'll deduct the £10 and you can have the video on us. NB:- it is an **offence** to copy this tape for any reason.



**OPTO
SCOUT - 3.1**

Latest mini frequency finder from Optoelectronics. It will capture & memorise up to 400 frequencies that can be recalled directly into the AR-8000. Supplied with Ant, Nicads & Charger.

RRP
£399



**NEW
OPTO
CUB**

ICD pocket freq finder.

• 8 sel. gate times

• digital filter • capture/hold fac'y.
Supplied with Nicads/Charger/Ant
& belt clip. RRP

£139



OPT-3300

A miniature H/held counter. Covers 1MHz-2.8GHz. Supplied with Ant, Nicads & Charger. RRP **£139**.

SPECIAL OFFER

£109.95



**DB-32
NEW**

The ultimate wideband Tx 2m/70cm Rx 30-1200MHz Antenna BNC fitting 1 1/2" long - it works superbly.

£29.95

SCANNERS FROM £100 - £1500

AOR - THE ULTIMATE RANGE

AR-2700	£299	£259.95
AR-8000	£449	£379.95
Optional voice recorder for 2700		£39.95
Soft case for 8000/2700		£17.95
CU-823 Comp I/Face		£99.95
SW-8000 S/ware for 8000		£49.95
AR-3000A	£899	£899.95
AR-3000A plus	£1099	£999.95
AR-SDU5000	£799	£719.95
ABF-125 Airband filter		£28.50

SPECIAL OFFER AR-3000A
display model 1 only ~~£995~~ **£849.95**

AOR & OPTOELECTRONICS!

Scout Reaction Tune

Now In Stock

Connect the Scout to the AR-8000/2700 and the scanner will tune to any signal received on the scout. For further advice **CALL US**.

**BUY THE AR-8000 &
OPTO SCOUT TOGETHER
RRP £849 OUR PRICE £739**

Includes modification to AR-8000 + connection lead. THE COMPLETE PACKAGE.

OTHER

HANDHELD SCANNERS

MVT-7100	£419	SPECIAL OFFER	£335
MVT-7000	£349	SPECIAL OFFER	£259
VT-225	£299	SPECIAL OFFER	£229
PRO-44	£179	SPECIAL OFFER	£119.95
R-1 ICOM	£499	SPECIAL OFFER	£379.95

BASE SCANNERS

PR-2036	New £349	SPECIAL OFFER	£249
PR-2035	£349	SPECIAL OFFER	£279
MS-1000	£299	SPECIAL OFFER	£229
R-7100	£149	SPECIAL OFFER	£119.95
MVT-8000	£419	SPECIAL OFFER	£335

EX-DEMO/SECONDHAND EQUIPMENT

FT-990DC	As new	£1429.00
FRG-100	As new	£429.99
FT-ONE	As new	£749.99
IC-735	As new	£749.99
FT-747GXII	As new	£549.99
TS-850SAT	Ex demo	£1549.99
FT-840	Ex demo	£649.99
TS-120S	100W HF	£349.99

+ LOADS MORE

FT-51R	2m h/has new	£199.95
TH-78E	As new	£349.95
TH-79E	As new	£369.95
2SRE	2m + scanner	£299.95
TH-27	2m as new	£199.99
FT-23R	2m VGC	£169.99
TH-215	2m as new	£199.99
DJ-180	As new	£169.99
TR-3600	70cms as new	£199.99

+ LOADS MORE

(all handhelds include Nicads/charger)

FT-290RII + FL-2025	as new	£499.95
TM-451E	As new	£329.99
PCS-7000	2m (50W)	£199.99
MCL-1100	Easy reader & monitor	£289.99
TM-733	2m/70	£549.99
DR-130	2m (50W)	£219.99
TM-255	2m all mode	
	as new	£759.99

+ LOADS MORE

MVT-7100	Ex demo	£299.95
VT-225	As new	£219.95
R-5000	As new	£799.95
R-1	As new	£29.95
AIR-7	As new	£179.99
AR-2000	VGC	£199.99
MVT-7000	VGC	£229.99
AR-8000	As new	£359.99

Most scanners supplied with Nicads/Charger

**WHEN EVERYONE AROUND US ARE PUTTING PRICES UP,
WE ARE PUTTING PRICES DOWN!**

Due to the vast quantity of antennas purchased by **YOU** from us, we have managed to negotiate a better deal from the factory. Unlike others - we are passing this saving on to you. Keep it up and we may get even better next year!!!

**TAIWAN SERENE
BASE ANTENNAS**

(P&P £6.50) OUR PRICE

TSB-3315	GF	144/70, 8.5/11dB (5.4m)	£129.95
TSB-3301	GF	144/70, 6.5/9dB (3m)	£64.95
TSB-3302	GF	144/70, 4.5/7.2dB (1.7m)	£49.95
TSB-3303	GF	144/70, 3/6dB (1.1m)	£34.95
TSB-3002	AL	144MHz, 6.5dB (2.8m)	£34.95
TSB-3001	AL	144MHz, 3.4dB (1.4m)	£29.95
V-2000	GF	6m/2m/70cm, 2.1/6.2/8.4dB (2.5m)	£119.95

ACCESSORIES

P&P £1.00 on the following

TSA-6001N Duplexer (+Coax) 2/70	£24.95
TSA-6003 Duplexer (Sockets) 2/70	£19.95



Bring your voucher to Leic's show & save even more money!

**HIGH QUALITY
MOBILE ANTENNAS**

P&P £4.50

DB-7900	144/70 cms, (5/7.6dB) 1.5m	£49.99
DB-770M	144/70 cms, (3/5.5dB) 1m	£22.95
DB-1304	144/70 cms, (2.15/3.8dB) .41cms	£19.95
DB-EL2E	144MHz, 1/4ths, 4.5dB (1.8m)	£29.95
DB-285	144MHz, 1/4ths, 3.4dB (1.3m)	£13.95

ACCESSORIES

P&P £2.50 on the following

MT-1301	H/Duty Mag Mnt + Coax	Top Quality	£24.95
MT-3302	H/Duty Hatch/Trunk Mnt	Top Quality	£24.95

SEE US AT THE LEICESTER SHOW

**£5.00 OFF ANY
BASE/MOBILE
ANTENNA!**

SUBS A 'Handy' CLUB Special Offer!

Get going on 'Two' With This Month's Combined Subs Club
& Readers' Offer of the
Alinco DJ-S1EZA 144MHz Hand-Held Transceiver
This compact rig won't be heavy on your purse or in the pocket!

**Subscribers
Price
£199.95
inc. VAT & P & P**



Alinco are well known for offering competitively priced equipment, and just look at what's on offer: 144MHz f.m. transmission and reception.

Just look what you get in the DJ-S1EZA package: Maximum 5W output (at 13.8V), 40 memory channels, digital signal display and memory functions (can receive a 'two digit' message and display it at a later time at the operator's convenience, triple stage selective power setting (High, Medium, low), Pager and Code Squelch.

Other features include: DTMF Keypad, Tone-encoder, Tone Burst (for repeater working), half duplex working, six channel steps (5, 10, 12.5, 15, 20 and 25kHz), dial control reverse function, Beeper on/off, autolight off, DTMF manual output, reverse function, auto-dialler, DTMF signal monitor.

Normally the DJ-S1EZA would cost you **£289** plus P&P but PW Subscriber Club Members can get theirs for the special price of

£199.95 including VAT & P&P.

Non-subscribers can also take advantage of this offer and get their DJ-S1EZA for **£215 including VAT & P&P** and they'll receive a year's subscription to PW absolutely **FREE!!**

The DJ-S1EZA special offer price includes NiCad battery pack, battery charger and keypad.

All P&P prices apply to UK, overseas readers please contact the PW Post Sales Department for postage prices.

Offer open until November 10 1995 (UK), November 24 1995 (overseas).

To take advantage of this offer just fill in the details on the Order Form on **page 78** of this issue. Alternatively call **Michael** on our **Credit Card Hotline** on **(01202) 659930** and quote **SCPW11** to place your order.

**Non-Subscribers
£215
inc. VAT & P & P
+ FREE
subscription!!**



October 15: The North Monaghan Hobby Radio & Computer Exhibition will be held at Cupids Nightclub and Restaurant, Smithborough, County Monaghan.

Proceedings start at 11.30am and continue until 5.30pm. All the usual retailers will be in attendance along with a large display of computer equipment and a Bring & Buy. Refreshments will be available all day in the adjoining restaurant along with full facilities for QSLing via the brewery! Admission is £2 and half price for all under fourteen. Talk-in will be on S22 from 10.30am. Facilities will be provided for disabled access. **Stephen Hand GI7UIM (08) (013657) 51479** evenings or **Ken O'Reilly GI7UIP (08) (013657) 38955** daytime.

***October 20/21:** Leicester ARS is being held at the Granby Halls, Leicester. Doors open at 10am each day (9.30am for disabled visitors). All the usual facilities. **Frank G4PDZ (01533) 871086.**

***November 4-5:** The Eighth North Wales Radio & Electronics Show is being held at the Aberconwy Conference & The Bew Theatre, Llandudno. The show opens at 10am, both days. **B. Mee GW7EXH (01745) 591704.**

November 12: The 5th Great Northern Hamfest (formerly the Barnsley Amateur Radio Rally) will take place at the Metrodome leisure complex in Barnsley Town Centre. Doors open at 11am. The venue is all on one level, (2 halls this year) with excellent disabled facilities. The event will feature all the usual trade stands covering amateur radio, computers (hardware and software), electronics, components and kits, clubs, repeater groups, Novice and specialist interest groups plus a large Bring & Buy. This year there will be Morse tests on demand from 12noon to 3pm (candidates must bring the appropriate documentation). A variety of refreshments are also available. For further details contact **Ernie Bailey G4LUE (01226) 716339** (home) or **(0836) 748398** (mobile).

November 12: Martlesham Radio Society will be hosting another Microwave Round Table event at BT Laboratories, near Ipswich, Suffolk. The event will commence at 10am and will include round table sessions testing facilities (including 24GHz Noise Figure measurements) and a Bring & Buy. This year the event is

RADIO Diary

expecting participants from several European countries including DB6NT and DC0DA who will augment the lecture programme with a microwave update. For BT Labs security requirements, all access is by advance booking only. MRS Secretary on **(01473) 644285** or for tickets, send an s.a.s.e to **Roy Smith G0RRC, Lykkebo, The Street, Burstall, Ipswich, Suffolk IP8 3DN.**

November 12: The 7th Midland Amateur Radio Society, Birmingham, Radio & Computer Rally is being held at the Stockland Green Leisure Centre, Slade Road, Erdington, Birmingham. Doors open 10am to 4pm. Admission is £1, children free. There will be a free Christmas draw, trade stands, local clubs, special interest exhibits, refreshments and a large, free car park. **Peter Haylor G6DRN (0121) 443 1189.**

November 19: The Bishop Auckland Radio Amateurs' Club will be holding its annual radio rally at the Newton Aycliffe Leisure Centre. Doors open at 10.30am for disabled visitors and 11am for everyone else. Further info. from **Mike Shield (01388) 766264.**

***November 26:** The Bridgend & District Amateur Radio Club will be holding its 9th Amateur Radio & Computer Rally at the Bridgend Recreation Centre in Bridgend. The rally will have all the usual amateur radio and computer dealers, a Bring & Buy, RSGB Morse test on demand (two passport size photos must be produced). Doors open at

11am, 10.30am for disabled visitors. Admission is £1. Further details from **Maurice GW0JZN (01656) 864579** or **Don GW3RVG (01656) 860434.**

December 3: The SDX Cluster Support Group will be holding a Radio, Electronics & Computer Rally in the Maryhill Community Centre, which is located just along from junction 17 of the M8 motorway and is located on major public transport routes. Doors open at 10.30am for disabled visitors and 11am to 4.15pm for everyone else. Entrance fee is £2 for disabled, UB40 holders and £2.50 for all other visitors (children under 14 accompanied by a parent free of charge). There will be many traders, club stands, lectures and demonstrations. Further information can be obtained from **John Dundas GM0OPS**, Rally Organiser, on **0141-638 7670.**

***December 3:** The Verulam Amateur Radio Club are holding their rally at the Watford Leisure Centre, which is located less than five minutes drive from the Junction of the M1 and M25 motorways. Trading will be from 10am to 4pm. **(01923) 222284.**

December 3: The Thames Valley Electronics Rally is being held at Kempton Park, Race Course, Sunbury-on-Thames, Middlesex. Doors open 10.30am to 4.30pm (10am free entry to the Bring & Buy stand). Major manufacturers and retailers, accessory supplies, antenna supplies, Bring & Buy stall, computers and component retailers and specialist groups. Admission for adults £1.50, OAPs £1 and children under 14yrs free. **(01494) 450504.**

If you're travelling a long distance to a rally, it could be worth phoning the contact number to check all is well, before setting off.

The Editorial staff of PW cannot be held responsible for information on Rallies, as this is supplied by the organisers and is published in good faith as a service to readers.

If you have any queries about a particular event, please contact the organisers direct.

Editor

A Comprehensive Collection - The Radio Valve Guides 1 to 5

Rob Mannion G3XFD looks at a series of valve books which have recently been added to the PW Book Service list.

The PW Editorial team are forever being asked 'Where can I buy a radio valve guide book' by readers. The enquiries come in by letter, telephone and during our various rallies and shows.

Well, I'm pleased to report another success for 'valve and vintage' enthusiasts by bringing you the news that we're now carrying the newly republished series of books entitled *A Comprehensive Radio Valve Guide* (1, 2, 3, 4, and 5) and the additional book (which compliments the series) *Handbook of Radio, TV, Industrial Transmitting Tube & Valve Equivalents*.

Originally published by Bernard Babani between 1951 and 1963, the clearly printed facsimiles editions (smaller than the originals) are now being produced by **Geoff Arnold G3GSR** of G. C. Arnold Partners. The books are packed with all the information the valve user requires and contain all the valve base pin-outs very close to the technical information. They all come very highly commended by me as they are extremely useful and very reasonably priced. My personal advice to valve enthusiasts is that they buy the complete set as they will prove to be extremely useful and versatile.

G3XFD

Radio Valve Guide Book 1

The first book in the A5-sized series covers the characteristics and base connections for British and American valves from the years 1934 to 1951. It also contains information on voltage and current stabilisers, rectifiers and post-Second World War British TV tubes and a guide on how to use the whole series. 55 pages. **£2.95.**

Radio Valve Guide Book 2

The second book covers British, European and American valves from the years 1951-1954. 42 pages. **£2.95.**

Radio Valve Guide Book 3

The third in the series covers British, European and American valves from the years 1954 to 1956. 40 pages. **£2.95.**

Radio Valve Guide Book 4

The 4th book in the series covers British, European, American, USSR and Japanese valves from 1956 to 1960 (with Russian valve index). 46 pages. **£2.95.**

Radio Valve Guide Book 5

The 5th book in the series covers British, European, American, USSR and Japanese valves from 1960 to 1963. 44 pages. **£2.95.**

Handbook of Radio, TV, Industrial & Transmitting Tube & Valve Equivalents

This book complements the whole series and as the name suggests, provides much information on equivalent valve types. Of particular interest to the collector and historian, the book also has a comprehensive Government (CV) to commercial equivalent guide. There are also guides to civilian equivalents for American Armed Forces types, and British Royal Air Force and Royal Navy valves. 60 pages. **£2.95.**

Errors & Updates

The Key Project, pages 33-37 June 1995

There were a couple of unfortunate mistakes that crept into the electronic keyer project. On the circuit diagram drawing, **Fig. 1** on page 33, the captions for the two switches were swapped over.


Please change S1 to S2 and S2 to S1, this corrects the problem connected with the overlay drawing **Fig. 8**. Also on the circuit diagram, the socket on the right-hand side near C4 should be labelled 'SK1'. On the overlay diagram **Fig. 8** the arrowed line marked 'Key' should be marked as 'To SK1 inner'.

Again, on the overlay drawing **Fig. 8**, please swap the orientation of capacitor C1 so that the '+' sign is on the left-hand side of it (and not the right as at present). Also on the subject of capacitors. The polarised capacitor (low right-hand side) shown as C5 is actually called Copt on the circuit diagram.

A slightly more serious problem is the addition of a wire link that shorts out the timing resistors R1 and 2. Remove the link shown in the part overlay diagram here.

Some readers may have been undecided as to which way up (or down) the two diodes D1 and 3 (both shown mounted vertically) are fitted. Both diodes D1 and D3 are to be mounted, as shown, but with their cathodes (banded end) down.

My apologies for these mistakes Ed.

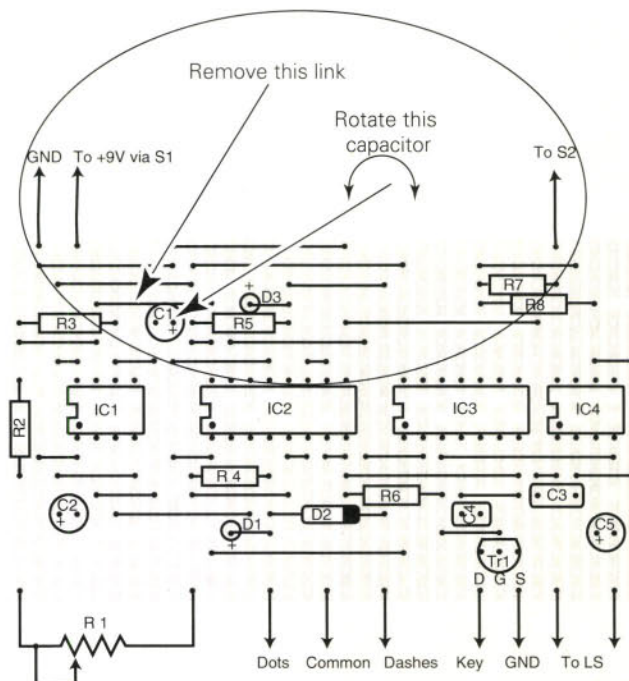

NOVICE *Natter*

DX Report News

Bob Nadolny WB2YQH has sent me some extracts from the 59(9) DX Report which I mentioned in the September issue. 'The Study Hall' is a section within the 59(9) DX Report aimed at the newcomer to DXing or contesting.

Bob has kindly said that I could reprint the extracts in this column. So, this month I've chosen a couple of interesting subjects.

Where do I find the DX in this pile-up? When tuning across the band and you hear the thunder of the pile-up calling a station, and you don't hear the DX station, does that mean you have no propagation?

Not at all! Most DX stations will work 'split frequency' to allow their signal to be on a clear frequency.

Try listening a few kHz above and below the pile-up for a station giving callsigns and reports. That is probably the DX station.

Now listen a bit longer for their callsign, so you know who you are calling. Then join the pile-up and hope you make it through.

Remember to set your rig to split frequency v.f.o. Good luck and see you in the pile-ups!

Making the contact may be easier than getting the QSL card someone once said. There are all kinds of variables that affect getting the valued piece of paper from the DX station. Providing the correct return postage is one of the main keys to receiving the card.

There are three types of return postage, the American Dollar (often referred to as the 'Green Stamp'), the International Reply Coupon (IRC) and the country's postage. There are benefits and disadvantages in some cases.

One disadvantage for instance, is that in countries such as India and Pakistan it is illegal to possess the 'Green Stamp'. The IRCs are

For Radio Beginners of all Ages.

*Elaine Richards G4LFM, PO Box 1863,
Ringwood, Hants BH24 3XD.*

*Elaine Richards G4LFM shares some more of the
'Natterings' she's received from 'novices' this
month.*

theoretically good in any country belonging to the International Postage Union. However, some countries refuse to accept IRCs. South Africa and Lesotho are two examples.

In other countries where there are small post offices, only allow small amounts of IRCs to be exchanged at one time. The foreign postage stamps available from vendors provide you with the correct amount of postage, making it easy for the DX station to insert your card in the envelope and mail it.

Many thanks to Bob and 59(9) DX Report for this information.

Like Father Like Son

I've been passed a letter from **Steve Appleyard G3PND**. He passed his RAE back in 1961 when he was just 16 years old.



Will G7VGF (ex 2E1DJB) in the shack he shares with G3PND.

Steve even designed and built his first transmitter and had many QSOs using it along with a BC348 receiver. By 1964 he had become a Radio Officer in the Merchant Navy and his interest in amateur radio lapsed.

The transmitter Steve built was subsequently given to a young amateur in Steve's home town of Grimsby. Following his Merchant Navy career, he studied further and joined the Marconi Company on the Design of Marine Communication and navigation systems.

Two years ago his 15 year old son, Will developed an interest in amateur radio (unprompted by Steve). Will got his Novice licence **2E1DJB** and rekindled his dad's own interest.

So on December 4 1993 Steve had his first QSO for almost 30 years! Mind you, he didn't build his transmitter this time, he bought a second-hand Yaesu!

Between Steve and Will they have also bought 144 and 430MHz rigs, so Will's bedroom/shack resembles Steve's of 32 years earlier!

The circle has been fully completed now, since Will has passed the RAE and received his callsign **G7VGF** at the age of 17.

I wonder how many others have a story like this? My dad has had the callsign **G1DAD** for a while and it's probably his fault I got interested in radio!

Licence Revisions

There have been a couple of changes to the amateur radio licences that you should be aware of. They affect all types of licence.

The first of these changes is that the Radiocommunications Agency will now publish the names of those whose licences have been revoked. A licence can be revoked when the Agency feels the holder either has or will not keep to the terms of the licence.

The second change is that if you want your details withheld from the callbook then no matter who publishes the callbook, whether on disk or on paper, this will happen. The Agency won't release your details to anyone wishing to publish a list. Previously, the Agency released your callsign and the first part of your postcode, now only the callsign will be released.

It's a sad fact that more and more radio amateurs feel unhappy with their details appearing in publications. The trouble is that many have a lot of money tied up in their hobby and don't necessarily want others to know where the station is.

Then there are others who don't appreciate people calling on them unexpectedly just because they are licensed. I've been told a story about a couple of amateurs who plan their holiday route depending on the addresses of other licensed amateurs, so they can have coffee stops and meals!

It is only a story, but.... I just thought I'd put a case for those of us who have come out of the callbook for one reason or another.

Buying Old Radios

Have you ever thought about buying one of those old (and real) radios, you know the ones in wooden cases. Trouble is they hardly ever work and need a bit of work on them.

If you enjoy renovating things like this you can often see them at car boot sales and so are reasonable to come by. Then the fun starts, where to go to get the bits and the information to mend it.

The PW Editorial Office

Low Power Operating (QRP)

Although Novice amateurs are in essence QRP operators, I think it's worth spending a little time explaining the virtues of QRP. Although it's seen by some as a lower form of amateur radio, QRP is in fact one of the areas where good results are directly related to operator skill rather than buying power!

When you're only starting with a watt or two of r.f., you have to be extremely careful to make sure every last milliwatt gets



radiated. Because of this, you will find that the best QRP operators go to great lengths to ensure that all parts of the station are optimised for maximum efficiency.

Whereas the amateur with 100W plus of r.f. may be able to tolerate a poor antenna, the QRP operator needs to select the most efficient antenna, given the space available. This almost inevitably involves much experimentation with home-made antenna systems.

The great thing about most home-built antennas is that they are very cheap - you just need a reel of wire and a few insulators. If you're not sure where to start, a look at the *FW Book Service* will reveal a wide range of books dealing with just about every type of wire antenna.

Of course, the antenna system cannot be considered in isolation and care also has to go into ensuring the feeder and, most importantly, the matching to the transmitter is also right. This often involves the use of antenna tuning units, though there is much debate on this point among QRP enthusiasts.

The low powers and predominant use of c.w. as a transmission mode for QRP also results in very simple transmitter designs - just right for home construction. If you have an interest in building your own equipment then QRP is the ideal place to start.

Much of the circuitry is very straightforward and the use of low powers minimises any safety problems. A particularly

good place to start is with one of the many kits that are available from *FW* advertisers.

I have a Lake DTR7 7MHz unit that has given me many hours a pleasure over the years. Keyed continuous wave (c.w.) using Morse is chosen as the prime operating mode both for simplicity of construction and because it's one of the more efficient modes in terms of converting all the transmit power into usable information.

So, in addition to becoming expert in using all the transmit power effectively, the good QRP operator also masters c.w. And is able to reliably extract signals from amongst the noise.

So how far can you work with such low powers? Well, given the right conditions you can work the world. However, you will find that you can reliably work into Europe on a regular basis with many other countries when conditions are right.


The skill comes in choosing the right band for the time of day so you can take advantage of any enhanced propagation conditions. So, yet another skill you will develop is to be able to interpret propagation data and select the optimum band and time of day for the country you want to work.

The skills that you develop as a QRP operator are not only fun in their own right, but the attention to detail it teaches is worth several S points no matter what power you end up using.

If you're interested in learning more about QRP, I would strongly recommend you join the G-QRP club run by the Rev. George Dobbs G3RJY. Full details can be obtained by sending a s.a.e. to Rev. George Dobbs G3RJY, St Aidans Vicarage, 498 Manchester Road, Rochdale, Lancs OL11 3HE.



Kits like the DTR7 and the QRP Sprint are ideal for QRP operators who enjoy home-brewing.

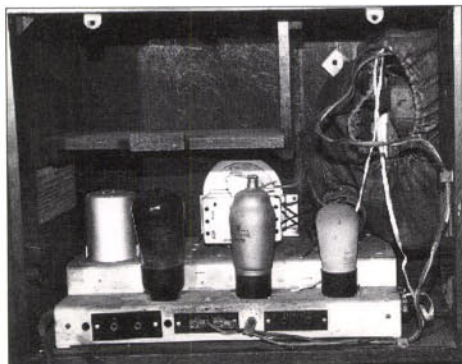

Radios like this could make a good club restoration project for the winter.

have given me a huge pile of catalogues from Savoy Hill Publications. There are lists of manuals, components, bakelite baseboards and all kinds of interesting bits and pieces. These lists are available free of charge from **Savoy Hill Publications, Seven Ash Cottage, Seven Ash, Easter Close Cross, Nr. Combe Martin, North Devon EX34 0PA.** How about making a radio

restoration your club project for the winter?

That's all I've got room for this month so until next time cheerio, and don't forget to keep sending your letters to the address at the top of the column.

Elaine G4LFM

Flat Holm Island Expedition

Back on August 26 1995, a party of 12 amateurs (7 GWs and 5 DLs from Passau in Bavaria) went to Flat Holm Island in the Bristol Channel. The event was to commemorate nearly 100 years since Marconi made his first ever radio transmission across water.

The joint expedition was also the Barry Amateur Radio Society's celebration of 50 years of peace with Germany, so a group of the society's friends from the Passau Radio Club in Bavaria were asked to join in the expedition also.

The joint DXpedition was a great success and both club's had a great time working together. The callsign used was GB5FI. Nearly 4,000 QSOs were worked in three days, which was pretty good going as due to the bad weather, the club were unable to land on the island for 24 hours!

However, with great team effort, the club landed at 8pm on Saturday evening and all hands set about building the station in the middle of the Bristol Channel. A 2-element mini beam on h.f. was put up and on the lower bands there was a Butternut vertical for 3.5 & 7MHz using a massive copper ground mat that was laid down many years ago for a marine beacon, (the beacon has gone), but the ground mat remains!

The 'Top Band' antenna was a simple half-wave dipole, but the club used pure silver wire, which was bought at a mobile rally. The G trader never knew that the wire was silver, but the GWs knew, wonderful wire for antennas! But, you have to hire Securicor on field days!

CLUB Spotlight

*Send your information to the
'Club Spotlight' newshound
Zoë Shortland at the PW Offices.*

The Manager GW0ANA set the team a target of DXCC in three days. Both club's managed this, 106 countries in three days and the cheers from the team were 5&9+40.



Joint GW & DL Flat Holm Mayor's Civic Reception, South Glamorgan. Back row (L to R) Deputy Mayor Councillor A. Ernest, GW3WBU, GW0PUP, Clive Trotman GW4YKL RSGB President, Lady Mayor, Mayor Councillor C. Dunkley, XYL of GW0PUP, GW4LFV, XYL of GW0ANA. Front row (L to R) DL9RCF, DL9RDZ, GW0ANA, DL8RBL, DL8RBV.

The Barry Amateur Radio Society like to do something new, radio wise, from this famous island every year. And this year, they made the first ever Pactor transmission from Flat Holm Island to the USA. So, in true spirit of Marconi, it was another successful experiment, particularly as a German invented Pactor!

The club thought it appropriate that Alois DL8RBL should be the first to transmit, followed by Glyn Jones GW0AN (Chairman of the BARS) to mark the occasion.

Swindon's History

The Swindon & District Amateur Radio Club can trace its origins to before the Second World War, but the club as it is known today, was inaugurated in August 1955 i what was then the Connaught

Restaurant in Cromwell St. It has met at several other venues since, including The Cold Harbour Public House, Oakfield School and, most recently Rowborough Farm in South Marston.

Since November 1994, the club has taken up residence at the **Community Centre, Savernake Street in the Eastcott Hill area of Old Town**. The activities of the club have always been centred on amateur radio, supporting a broad range of members' interests, both in the field of construction and operating. The club has two active callsigns G3FEC and G8SRC.

Membership to the SDARC is open to anyone interested in radio and allied subjects. New members, whatever their experience in amateur radio, are always welcome as are visitors who are considering the hobby. If you are uncertain about joining, you are welcome to come along as a visitor to see just what the SDARC programme offers.

Those considering preparing for the Radio Amateurs Examination (RAE), will always find experienced operators and skilled technicians to provide support and advice. Those working towards their Class A licence can count on experienced Morse operators, who are always willing to provide slow

The Bridgend & District Amateur Radio Club meet on the 1st and 3rd Wednesdays of the month at Club Brynmenyn, Brynmenym, Nr., Bridgend. Further details on the club can be obtained from **Alun GW7KYT on (01656) 721574** or **Maurice GW0JZN on (01656) 864579**.

The **Thornbury & District Amateur Radio Club** meet every Wednesday night at 7.30pm at the United Reform Church Hall, Rock St., Thornbury. Novice RAE, RAE & Morse classes are run according to demand. Further details from **Peter G4OST** (Secretary) on **(01454) 612689**.

speed Morse transmission for practice purposes.

The Swindon & District Amateur Radio Club meet at the above address where weekly Thursday meetings are held from 7 to 9pm. These well-supported evenings include a fortnightly programme of talks (beginning at 8pm) alternating with informal 'natter & operating' evenings. For more details, contact **Den G7PDV** on **(01793) 822705**

Wednesdays At Wirral

The **Wirral & District Amateur Radio Club** meet every 2nd and 4th Wednesday of each month at the **Irby Cricket Club, Irby Mill Road, Irby, Wirral** at 8pm and every 1st and 3rd Wednesday at various locations. Everybody with an interest in amateur radio is welcome to attend any club event as a guest.

A few up and coming events are: October 18 - D&W at the Saughall Massie Hotel, 25th - ATV Night with Bob G4NCI and Andy G7HUD, November 1 - Ten Pin Bowling at Bromborough, 8th - Train driving by Brian G4ZQP.

Further information on any aspect of the club can be obtained by contacting **Bob Smith G4NCI** on **0151-606 8989**.

Brighton Back On Air

Following an extraordinary general meeting, the **Brighton & District Amateur Radio Society** now has a new committee. The committee aims to revitalise the Society.

Considerable interest has already been shown in getting the Society back on the air, both at Society meetings and at

Field Day events. A 144MHz station has recently been purchased by the Society and it is hoped that an h.f. station will follow.

Interest has also been shown in 'Foxhunting' and a simple receiver for this is under design in the hope that a hunt can be arranged for the autumn.

The Society meet at 7.45pm in the Steward's Rooms at Brighton Racecourse. These are usually on the first and third Wednesdays of the month, although these dates sometimes have to be changed to avoid clashing with race meetings.

Further information can be obtained from the new Secretary, **Paul Fellingham G7FJC** who can be contacted at **26 Fitch Drive, Lower Bevedean, Brighton, East Sussex BN2 4HX**.

Combined Special Event Station

The opening of a permanent Special Event Station GB2BP at Bletchley Park on Sunday December 3 1995 will be run jointly by the Bletchley Park Museum Trust and the **Milton Keynes and District Amateur Radio Society**. The outgoing President of the RSGB, Clive Trotman GW4YKL, has kindly agreed to open the station and this event will be covered by Anglia Television for transmission on their Anglia Today programme and BBC East has also expressed an interest.

A couple of years ago the Milton Keynes & District Amateur Radio Society were approached by the Bletchley Park Trust to look after the radio affairs for the Museum. In return, the Society now enjoy free club premises at Bletchley Park.

At present, the Museum is only open on weekends as it is still in the initial stages, but it is hoped that it will expand in the near future and become an international attraction and enjoy the same status as other National Museums. As a result of this, the Society have successfully applied for the permanent Special Call GB2BP.

It is envisaged to run an up-to-date modern station utilising as many aspects of the hobby as possible in conjunction with a vintage station using Second World War equipment, much of

which is already on site. It is hoped to encourage the public with 'hands on' experience, thus promoting and encouraging people into the hobby.

The Milton Keynes & District Amateur Radio Society are actively seeking sponsorships from manufacturers and traders, and if you would like to ask further questions or you have any queries, do not hesitate to contact the club secretary **Verdun Webley G0RKV, QTHR**.

Attention All Club Secretaries

The *PW* Book Service Department has put together a special deal offering discounts on book orders received from radio clubs. If your club places an order for books from our comprehensive selection on titles that totals over £50 we will give you a **10% discount** and **free post and packing!**

To take advantage of this offer please use the order form towards the back of this issue, making sure that it is the club secretary who places the order and that the name of your club is stated.

So, don't delay, take your copy of *PW* along to your next club meeting and get your members to start making a list of those books they've been meaning to buy, but never quite got round to.



National First

Poole Radio Society, organisers of the first National Novice Contest, operating from Povington Hill in Dorset. (L to R) Geoff 2E1CSR, Colin G6MXL, Brian G4WCJ, John G4XGM and Peter G3BLN.

Changes For Stockport



Stockport Radio Society has recently changed its meeting place from the Dialstone Centre to **T.S. Hawkins, Stockport Sea Cadet Corps HQ, Pear Mill Industrial Estate, Stockport Road West, Lower Bredbury, Stockport**, where it will continue its programme of meetings on the second and fourth Wednesdays of the month, commencing at 7.30pm.


Formal and informal evenings of the **Norfolk Amateur Radio Club** are held at the Norman Centre, Bignold Road, off Drayton Road, between Asda and the Mile Cross Roundabout, Norwich. On November 1 there is a surplus equipment sale and on the 8th it's night on the air, construction QRP and Morse practice.

Further information from **Chris Howett G4ILR**.

Non-Event Celebration

Celebrations to mark the 150th anniversary of the opening of the Scarborough to York railway line has been in the planning stage for many months, with a week-long carnival arranged, centred around the Railway

exceptionally hot British weather, Railtrack ruled that steam locomotives would not be allowed to operate due to the risk of sparks setting fire to the tinder dry countryside and therefore cancelled the entire event! (anyone want to

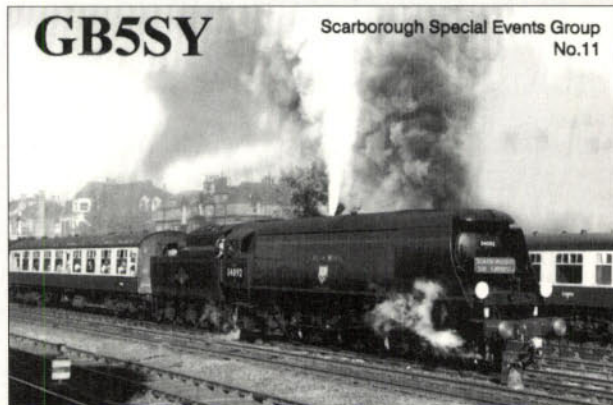

Station. Many famous steam locomotives were scheduled to carry passengers (and the town council) on commemorative runs between the two towns, and the **Scarborough Special Events Group** was organised to operate 'GB0SY' as part of the celebrations, with 1000 souvenir QSL cards printed, ready for distribution.

One week before the event, as a result of the

buy 1000 QSL cards?)

Fortunately, the Society managed to persuade the Council that the anniversary should still be commemorated and the outcome was 1000 satisfied customers on the air, and unexpected local press coverage as being the only Group who celebrated the non-event!

See Us At
The
Leicester
Show!

NEVADA

Icom IC-706



New and unique all-mode mobile transceiver with ultra wide band receiver plus 2m and 6m all mode! 100 watts on HF + 6m and 100W on 2m.....£Call

Alinco DX-70



For those of you who feel they don't need 2m in their HF rig this is the ideal choice. We've tried it here in the showrooms and its good!.....£1095..£995

Yaesu FT1000 MP



The very latest HF radio from Yaesu. Nevada can offer the very best deals and after sales service, call Paul or Lloyd now for further information.

Kenwood TS870



As Kenwood main dealers we can offer the very best deal on this new radio. Why not Part X your old set. . . and pay the balance by 3 post dated cheques. . .interest free!

We offer excellent part exchange deals and our Post-Dated Cheque Scheme!

Call us for honest advice on these new radios - we will be pleased to help!



Magnetic Loop Antennas

Our DRAE magnetic loops use high quality semi rigid 13mm Japanese Ultra Low loss cable for the radiating element, making loft mounting & portable operation possible.

Packs easily away into the car boot. Fibreglass construction ensures full weatherproofing.

- (3 - 30) MHz Coverage
- Remotely Tuned
- 200W PEP Power

- Flexible for Loft Mounting & Portable Operation
- Low Visual Profile



Model ML80

Freq: 7 - 30 MHz (continuous)
Diameter: 80cms
Price:.....£169.95 (P&P 5 £5.75)

Model ML170

Freq: 3 - 10.3 MHz (continuous)
Diameter: 1.7 mtrs
Price:.....£189.95 (P&P £6.75)

ML1 Control Unit - Not Supplied

Optional 2 way control unit allows remote tuning & switches between 2 loops.....£24.95



High Power ATU Components

Variable capacitors

TC 250 250pf @ 7.8 KV
Price.....£24.95

TC 500

250 + 250pf @ 7.8 KV.....£34.95

TC 26 Roller Coaster

Silver plated wire
1 - 30µH @ 500 Watt
Price.....£39.95

Control Knob

A professional graduated control knob. 6 cm outer diameter with 6mm shaft.£3.57

TC48 Turns Counter

Dial indicates 1 unit for 1 rev of counter. 48 turns maximum. 1/4" drive shaft.....£19.95



Military Spec Components

Manufactured for government & military applications but suitable for the Amateur radio enthusiast who wants the very best.

Baluns - For outdoor antenna use

MSB 200 200W 1:1.....£23.95

MSB 200 200W 6:1 (for windoms).....£23.95

MSB 2K 2 KW 1:1.....£34.95

MSB 5K 5 KW 4:1.....£39.95

MSR 70 Roller Coaster

Ceramic former, silver plated wire, fully geared drives 0.8 - 70µH 1KW. 193 x 97 x 86 mm

Price.....£59.95



Wire Antennas

DRAE wire antennas use the very best quality

components and "Flex Weave" wire with 168 strands of 36 gauge solid copper woven to give high strength and flexibility. This wire won't kink, unfold or rust. DRAE antennas are guaranteed to give years of outstanding performance

G5RV.....Full size (80 - 10 mtrs).....£45.00

G5RV.....Half size (40 - 10 mtrs).....£35.00

GW40.....Windom (40 - 10 mtrs).....£55.00

GW80.....Windom (80 - 10 mtrs).....£65.00

EFW.....End Fed Wire (s/waves).....£59.95

DLB.....Long Wire Balun.....£39.95

Flex Weave Wire.....74p per metre

G5RV Plus Antennas

For the perfectionist a G5RV that uses 450 ohm ladderline/balun for coax feed.

G5RV Plus Full size (80 - 10 mtrs).....£75

G5RV Plus Half size (40 - 10 mtrs).....£65



New Military Style 35ft Telescopic Masts

MSM 35 - Manufactured to military specifications an ideal support for wire & lightweight VHF beams.

- Seven sections 65mm bottom section 20mm top section
- Base plate
- 1 set guys/ground stays
- Spring loaded locking pins
- Weight 9.9kg

Price.....£139.95 + p&p £10



GAP Verticals

We are pleased to be appointed distributors for these super Verticals from the USA.

Using an elevated feed system and no traps, coils or transformers these antennas dramatically reduce losses so more RF radiates into the air! Gap Verticals do not require tuning just assemble the antenna & your ready to go with full band coverage (at less than 2:1 SWR).

- Eliminates most earth loss
- No traps, coils, transformers
- Requires no radials

Challenger DX

Cvrs:- 2, 6, 10, 12, 15, 20, 40, 80 Mtrs.
Height:- 31.5 ft.....£259

Titan DX

Cvrs:- 10, 12, 15, 17, 20, 30, 40, 80 Mtrs.
Height:- 25 ft.....£289

Eagle DX

Covers 10, 12, 15, 17, 20, 40 Mtrs.
Height:- 21.5 ft.....£269

Voyager DX

Covers 20, 40, 80, 160 Mtrs
Height 45 ft.....£399

AKD

A range of British made low cost transceivers - that offer outstanding value for money. At these prices we just can't keep up with the demand!



AKD 2001.....2mtr 25/5W FM.....£193

AKD 4001.....4mtr 25/5W FM.....£193

AKD 6001.....6mtr 25/5W FM.....£193

AKD 7003.....70cm 3W FM.....£193

AKD WA2.....VHF Wavemeter.....£32.95

AKD WA3.....VHF Wavemeter.....£32.95

AKD HPF1.....High Pass TVI Filter.....£8.50

AKD BB1.....Braid Breaker Filter.....£8.50

Microwave Modules

Well known for their reliability and rugged design these amplifiers are back!



144-30LS.....2m, 30W + P/Amp.....£99.95

144-100LS 2m, 100W + P/Amp.....£199.95

144-100S.....2m, 100W + P/Amp.....£179.95

432-30LS 70cm, 25/30W + P/Amp.....£169.95

432-50S.....70cm, 50W + P/Amp.....£169.95

70-100S.....4m, 100 W + P/Amp.....£179.95

50-100LS.....6m, 100 W + P/Amp.....£199.95

50-100S.....6m, 100 W + P/Amp.....£179.95

Yaesu Master Dealer

YAESU

FT2500m - A superb 2m

Mobile transceiver offering exceptional selectivity & sensitivity with a punch packing 50W output. This month we can offer it at a massive £70 saving...RRP £399.....£329



FT11R.....RRP £324.....£Call

FT41R.....RRP £369.....£Call

FT51R.....RRP £529.....£Call

FT290RII.....RRP £599.....£Call

FT736R.....RRP £1999.....£Call

FT790 RII.....RRP £749.....£Call

FT900.....RRP £1399.....£Call

FT990DC.....RRP £2399.....£Call

FT5100.....RRP £679.....£Call

Kenwood

TH-48E.....RRP £369.95.....£335

TH-79E.....RRP £479.95.....£432

TM-255E.....RRP £949.....£695

TS-50S.....RRP £1059.95.....£955

TS-450SAT.....RRP £1649.95.....£1485

TS-850SAT.....RRP £1959.95.....£1765

Alinco

DJ-580 Twin Band Handie

- 5 Watts
- AM Airband RX
- Full Duplex (repeater)
- Receives to 950 MHz

only 3 left at this crazy price.....£369



DR130E 2m mobile

- 50 Watts
- CTCSS fitted
- 20 memories
- Extended RX

Special "one off" price.....£299

DJ-G5.....New Model.....£479

DX70.....New HF + 6.....£995

DRM06.....6M Mobile.....£299

DJ480E.....70cm H/Held.....£239

DJ180E.....2M H/Held.....£199



On The Internet?

E Mail Us at:-

lloyda@aladdin.co.uk

or point your www browser at:-

http://www.ee.port.ac.uk/~arrow_1



USE YOUR CREDIT CARDS FOR
SAME DAY DESPATCH




ORDER HOTLINES:

TEL: (01705) 662145
FAX: (01705) 690626

Pay By Three Post-Dated Cheques

On Any Item Over £100 In Value

Simply divide the price into 3 equal payments. Write 3 cheques dated in consecutive months starting with today's date. Write your telephone no., cheque card no. & expiry date on the back of each cheque. Post them to us, enclosing your name and address & we will (subject to status), send your goods immediately.

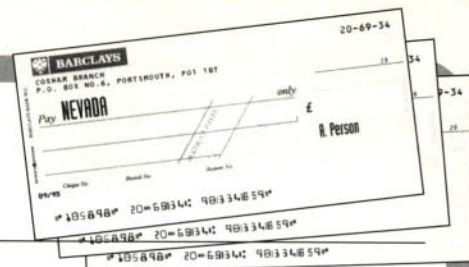

Icom 707



If you are new to HF this is the radio for you. Transmits on all ham bands plus general coverage receive. 32 memories, pre-amp, attenuator and RIT. £829...£690

Yaesu FT 840



Compact 100W HF transceiver with general coverage receiver. 100 memory channels, twin VFO's and 10 mtr FM repeater shift. Few only at...£959...£699

Drake R8A



A world class communications receiver for those who can afford the very best. Supplied with all filters fitted as standard and far more features than we can list here...£1295

Hurry - We have only a few radios at these crazy prices!

AEA Data Products

We are pleased to welcome Lloyd Arrow G1JAR. As one of the countries leading Data Experts Lloyd will be able to help and assist you with all the aspects of Digital Comm's.

PK-12

1200 bps VHF, Packet TNC unit.



Features include GPS Firmware, 18K Mailbox Standard (32K RAM) expandable, Forward & Reverse forward messages, Special easy command set for beginners, Gateway Firmway...£119.00

PK-232MBX

Multi mode Data



Controller. Modes inc: Packet, AMTOR/SITOR, Morse Code, Baudot, & ASCII. RTTY, WEFAK, NAVTEX, PACTOR & TDM reception. Now supports gateway facilities with both ports handling HF & VHF...£299.00

Software

Skyview Fax H.F. RTTY, FEC, CW + Fax...£139

Skyview Synop VMO RTTY...£149.95

Sky Call Windows Based Call Book...£19.95

IC-RX Computer cont. Icom TX/RX's...£44.95

Vectronics

A range of high quality accessories imported by us direct from the USA.

HFT1500 - A 3K

Watt (PEP) ATU, with all the extras. 4 way ant. switching, roller inductor, SWR/PWR meter, Balun for open wire feeders and Peak reading digital meter. Price...£349



VC300DLP - Our

most popular ATU. 300W (PEP), Dummy load, VSWR meter, 3 way ant. switch & Balun for open wire feeders...£129.95



PM30 - Displays Peak or

Average forward power, reflected power & SWR simultaneously. 1.8 - 60 MHz Pwr 3Kw (in 2 ranges)...£69.95



VC300M - New

mobile ATU covers all bands. Dual meter reads Power and SWR simultaneously. Can be used at home or in the car...£89.95



AOR Scanners

AR 8000 Plus OPTO Scout

Let the OPTO Scout tune your AR 8000 to the captured frequency instantly! The Scout will capture & memorise up to 400 frequencies that can be recalled directly into the AR 8000.



Special Offer

AR8000 + Modification + Scout

RRP £923...Our Price £795

AR8000

Why not Part Exchange your old handheld or pay by 3 post dated cheques for this new handheld that features

- 500 kHz - 1900 MHz
- Computer control
- Data clone
- 1000 memories

Price...£449...£389

AR3000A

Base scanner covers 100 KHz - 2036 MHz receives AM/FM/SSB plus many more features including computer control...£999...[Special] £899



New From OPTO

OPTO 3300 - A new miniature H/Held counter that's very sensitive.

- 1 MHz - 2.8 GHz
- 10 Digit LCD Display
- Hold Switch Locks Display



- Good Sensitivity
- Supplied c/w Ant, NiCads & Chargers

Special Offer...£159.95...£139.95

OPTO Scout V.3.1

- 10 MHz - 2.8 GHz
- 400 Memories
- Reaction Tune of RX
- Digital Filter & Auto Capture
- 16 Segment Bargraph for Signal Level
- Software Supplied For PC Upload/Down
- Supplied c/w Ant, NiCads & Charger
- Use the Opto Scout to reaction tune your AR8000 Scanner - call for details.



Special Offer...£449.95...£399.00

Receivers

Lowe HF250

A superb new receiver from Lowe built in the UK to high standards. Covers 30 KHz to 30 MHz with a host of features...£799



HF-225...Receiver...£499

D-225...Synchronous DET...£45.95

HF-150...Receiver...£399.00

PR150...Pre selector...£205.00

SP150...Spkr c/w filter+meter...£189.00

Yaesu

FRG-100...Shortwave RX...£499.00

FRG-9600...VHF RX...£575.00

Kenwood

R5000...Competition class...£945.00

Icom

IC-702 DC...HF RX 12 Volt...£746.00

IC-R7100 DC...25-2000 MHz...£1225.00

Sangean ATS803A

Still the most popular shortwave receiver under £120.



Covering LW, MW & Shortwave with

SSB reception. With free P&P

& World band radio guide!...£119.95

Sangean ATS 818

One of the best beginners portable receivers available! With SSB reception it receives S/wave



(150 KHz - 30 MHz), + FM Stereo. Free this

month - World band radio guide + 240V

AC mains adaptor.

Price...£159.95 (p&p £4.75)

Advanced Digital Audio Filters

- From Timewave USA

- New V3.1 For Voice, CW & Data modes

These filters really help you pull the weak station out of the noise and QRM by simultaneously reducing noise up to 20dB and heterodynes up to 50dB. Using 3rd generation 16 bit processing that provides razor sharp audio for SSB, CW and Data modes.



DSP-9 - Push button selectable noise filter, notch filter, SSB & CW filters

100, 200 500 Hz, 1.6, 2.0, 2.4 KHz bandpass for CW/SSB with AGC...£189

DSP-9 Plus - Push button selectable, noise, notch, SSB & CW filters.

Prog CW centre freq., HF data filters.SSB 1.6, 2.0, 2.4 KHz CW 100, 200 & 500 Hz.

All modes with AGC...£239

DSP-59 Plus - All modes with AGC. Hundreds of CW & bandpass filters allow

you to select almost any filter combination. Inc. all data filters in DSP9+ plus SSTV,

EME & WEFAK...£299

Quality Used Equipment

All Safety Tested &

Guaranteed For 3 Months

Alinco DJ-580...Twinband...£299

Alinco DR-112...2m FM mobile...£225

FDK Multi 700EX...2m FM Handie...£175

Icom 720A...HF Trans. PSU...£695

Icom IC2E...2m Handie...£100

Icom IC4E...70cm Handie...£115

Icom IC-240...2m mobile...£145

Icom IC-736...HF+ 6m base...£1595

Icom IC-P4E...70cms...£195

Icom PS15 P.S.U...As new...£155

Kenpro KT 22...2m Handie...£95

Kenwood AT230...ATU's (x2)...£175

Kenwood R1000...S/wave RX...£325

Kenwood R2000...+ VHF fitted...£495

Kenwood TM 451E...Ex demo model...£375

Kenwood TS-120S...Mobile HF...£450

Kenwood TS-140S...Gen Cov HF...£695

Kenwood TS180S...HF S/State...£475

Kenwood TS680S...HF + 6m...£795

Kenwood TS-830S...Classic HF...£595

Kenwood TS-130V...HF...£395

Rexon RL102...2m H/Held...£165

Sommerkamp FT690 6m m/mode...£295

Standard C500...Choice of 2...£225

Standard C528...Twinband...£325

Swan 100 MX...H.F Mobile...£345

Tentec Corsair II...V.G condition...£849

Tono TT40...70cm TX...£199

Trio TS830/S...Average cond...£575

Yaesu FRG7...+ Digital display...£225

Yaesu FT101ZD...Choice of 2...£495

Yaesu FT-102...Base HF...£595

Yaesu FT-107M...+ Matching PSU...£575

Yaesu FT221R...2m M/M Base...£245

Yaesu FT-707...HF Tx/Rx...£475

Yaesu FT-727R...Dualband...£295

Yaesu FT736...2m/70cm...£1095

Yaesu FT901 DM...Line up...£629

Yaesu FT757GX...HF Gen Cov...£545

Yaesu FT790 mk1...70cm m/m...£365

Yaesu FTV901R...With Fitted 2m...£175

Wanted For Cash

Your good quality used Amateur & Shortwave equipment.

Call Lloyd G1JAR now on our hotline.

(01705) 662145

SHOWROOMS:- 1A MUNSTER ROAD, PORTSMOUTH PO2 9BS

MAIL ORDER:- 189 LONDON ROAD, PORTSMOUTH PO2 9AE

From the USA to the UK...

Subscribe to *Monitoring Times*® and *Satellite Times*®

Monitoring Times is the most comprehensive monthly radio hobby magazine in the industry, covering all that's new in shortwave broadcasting, scanning equipment, amateur radio, news, computers and much much more.



**If it's on the Radio,
It's in Monitoring Times.**



Satellite Times is the newest star in space, covering commercial, military, scientific, governmental and personal communications. If you're interested in satellites, you'll love this bi-monthly magazine.

**If it's in Orbit
Satellite Times Covers It.**

Mail this subscription form to: PW Publishing Ltd., Freeport, Arrowsmith Ct. Station Approach, Broadstone, Dorset BH188 PW.

Subscription Rates include speedy Air Mail Service!

☐ 1 year *Monitoring Times* £34 (12 issues)

☐ 1 year *Satellite Times* £28 (6 issues)

Name _____

Address _____

Postcode _____

Telephone _____

I enclose cheque/PO (Payable to PW Publishing Ltd.) £ _____

Or Charge to my Access/Visa Card the amount of £ _____

Card# _____

Valid from _____ Thru _____

Signature _____

Tel _____

Credit Card orders taken on (01202) 659930

FAX orders taken on (01202) 659950

EASTCOMM

Europe's Largest Amateur Radio Showroom

Cavendish House, Happisburgh, Norfolk. NR12 0RU

OPEN: MON-FRI 9.00-5.30, SAT 9.00-4.00 (Closed 18-20 October) FAX 01692-650925.

VISA
ACCESS
SWITCH
AMEX
DELTA
FINANCE

SEE YOU AT

LEICESTER

OCTOBER 20th & 21st Stand S22

Tel: 01692-650077

ALL PRICES INCLUDE MAINLAND U.K. DELIVERY

"Mosley USA...a better antenna!"

Look at the trap assemblies for instance....

Mosley's advanced designs mean only 1 trap assembly for 2 bands. A 3 element Mosley beam for 10/15/20m only has 6 trap assemblies. Other makes have 12!

So a Mosley beam is stronger, with less wind loading.

BEAMS Junior Series 1.2kW

TA-31-JR-N 10/15/20M 1 element £189.00

TA-32-JR-N 10/15/20M 2 element £299.00

TA-33-JR-N 10/15/20M 3 element £349.00

TA-33-JR-N-WARC 10/12/15/17/20 4 element £479.00

BEAMS M Series 2.5kW

TA-31-M # 10/15/20M 1 element £229.00

TA-32-M # 10/15/20M 2 element £399.00

TA-33-M # 10/15/20M 3 element £509.00

TA-33-M-WARC # 10/12/15/17/20M 4 element £859.00

TA-34-XL # 10/15/20M 4 element £809.00

TA-34-XL-WARC 10/12/15/17/20M 5 element £899.00

TA-53-M-WARC # 10/12/15/17/20M 4 element £769.00

For the new 30 page catalogue send 4 x 19p stamps.

Please mark your envelope 'MOSLEY'.



PW 8/95
R'COMM 10/94
REVIEWS
J.CQ 8/94
QST 5/95

For more information on the RF1 send 4 x 19p stamps. Please mark your envelope 'RF1'

RF1 ANTENNA ANALYSER

The pocket-sized RF Analyst has revolutionised antenna checking. Connected to any antenna it instantly reads out Impedance/SWR/Inductance/Capacitance from 1.2 to 35MHz.

£159.95 (Protective Case £14.95)

YOU TAKE PRIDE IN YOUR MORSE CODE, SO YOU DESERVE A VIBROPLEX KEY



ORIGINAL PRESENTATION £229.00

ORIGINAL DELUXE £149.00

ORIGINAL STANDARD £129.00

IAMBIC PRESENTATION £189.00

IAMBIC DELUXE £139.00

IAMBIC STANDARD £119.00

SINGLE PADDLE DELUXE £139.00

SINGLE PADDLE STANDARD £109.00

For more information on Vibroplex keys send 4 x 19p stamps. Please mark your envelope 'VIBROPLEX'

DELTA Coax Switches

A New Standard in Lightning Surge Protection



REVIEWS
PW 8/95

Delta 2 (2 Way, UHF connectors, 500MHz, 2kW) £69.95

Delta 2N (2 Way, N connectors, 1300MHz, 2kW) £79.95

Delta 4 (4 Way, UHF connectors, 500MHz, 1.5kW) £89.95

Delta 4N (4 Way, N connectors, 1300MHz, 1.5kW) £99.95

Cartridge (replacement cartridge for all switches) £10.95

Σ SIGMA

BALUNS

SPB-1 1:1 Voltage Type, 3-35MHz, 1kW £29.95

SPB-1C 1:1 Current Type, 1.5-55MHz, 3kW £32.95

SPB-4 4:1 Voltage Type, 3-35MHz, 1kW £32.95

TRAPS (2 needed for dipole, 1 for sloper)

ST-10 28MHz, 600W £29.95

ST-12 24MHz, 600W £29.95

ST-15 21MHz, 600W £29.95

ST-17 18MHz, 600W £29.95

ST-20 14MHz, 600W £29.95

ST-30 10MHz, 600W £31.95

ST-40 7MHz, 600W £31.95

ST-80 3.5MHz, 600W £31.95

TRAP DIPOLES

SD-32 20/15/10m, 2 Trap, 27ft £83.95

SD-42 40/20/15/10m, 2 Trap, 55ft £89.95

SD-52 80/40/20/15/10m, 2 Trap, 105ft £103.95

SD-162 160/80m, 2 Trap, 208ft £125.95

SD-34 20/15/10m, 4 Trap, 24ft £142.95

SD-44 40/20/15/10m, 4 Trap, 47ft £147.95

SD-54 80/40/20/15/10m, 4 Trap, 97ft £161.95

SD-56 80/40/20/15/10m, 6 Trap, 82ft £219.95

SD-68 160/80/40/20/15/10m, 8 Trap, 154ft £297.95

SD-610 160/80/40/20/15/10m, 10 Trap, 148ft £349.95

For information on the full range of Sigma aerials send 4 x 19p stamps. Please mark your envelope 'SIGMA'.

PERSONALISED WORLD CLOCKS

A 9" dia. clock finished with YOUR CALLSIGN printed on the face. A valuable aid to HF operators.

£39.95

INC. WORLD-WIDE DELIVERY

REVIEWS
J.CQ 12/94

(STATE CALLSIGN & AREA OF WORLD YOU OPERATE FROM)

REVIEWS
PW 7/95

The Yaesu FT-8500

Regular PW contributor Leighton Smart GW0LBI goes mobile with a friend to try out the newly introduced Yaesu FT-8500 dual-band v.h.f./u.h.f. mobile transceiver.



The FT-8500 dual - band mobile transceiver with accompanying 'Smart Controller'.

When I was asked to review this new transceiver from Yaesu, I must admit I viewed the task with a certain degree of trepidation! But I like a challenge!

The story was that it was one of the more unusual transceivers to emerge from the Yaesu stable in recent years. This is because apart from one control on the rig's front fascia, the transceiver's entire array of controls are on the microphone!

The fascia of the rig, which is detachable, is almost completely taken up by the very large display. Despite only having used transceivers with the controls in the 'normal' place where one would expect to find them...I decided to accept the challenge.

So, I determined to take a totally objective view of Yaesu's new dual-band v.h.f./u.h.f. mobile transceiver. After all, it would probably be the only time I'd get the opportunity to operate one, and it would give me my first chance at operating on the 430MHz band!

Mobile In Mind

The FT-8500 transceiver is designed with the mobile operator in mind. And despite not being a car owner, I didn't want to try out the rig from my home QTH.

As my home is in the valleys of south east Wales, with its hills being great r.f. barriers at v.h.f. and u.h.f., I really wanted to 'do it justice' by operating it while mobile and then preferably from the top of a hill, in order to get reports from a greater distance than just down the road in the next village!

I enlisted the help of my friend **Dave Griffiths GW0JUI**. Dave was kind enough to immediately assist me with the task of reviewing this rig from within the comfort of his vehicle!

Furthermore, having no antenna for the 430MHz band, I made a quick 'phone call to **Sandpiper Communications** in Cwmbach. They very kindly loaned me a dual-band 'mag mount' antenna for the review.

The first thing that struck me upon opening the FT-8500's box was the microphone. In

actual fact, it's not called a 'microphone', but a 'Smart Controller' (This I think sums it up more accurately!).

Smart Controller

The 'Smart Controller', which is illuminated, contains all the controls for this little rig. And the microphone is there! It's of the condenser type and is located under a very small grill.

Directly below is the direct entry keypad. There's also the **DTMF Paging** button, and the **CTSS Tone** button.

Turning the unit around, I was faced with an array of controls. These included separate **Volume** and **Squelch** controls for both 144 and 430MHz and the **Repeater Shift** button for transmit offset for repeater operation. Then there was the **VFO/Memory** and **Scan** buttons, plus the **CNTL** (Control) button enabling me to switch from one band to the other.

One feature that I considered quite a novelty, for myself at least, was the three axis 'joystick' type control. This allows frequency changing of both kHz and MHz and channel selection.

There's also a **Mute** button which allows you to mute the audio from both of the channels or bands in use and a **Home** button. This enables the operator to return to their original frequency during scanning.

The **SPA** button (to my surprise) turned on the 'Spectra Analyser'. This allows the operator to view activity above and below the selected frequency!

In reality, the **SPA** feature means that the operator, while listening to another station, could 'see' other stations working above or below the operating frequency. They can get a good idea of activity levels on the band without having to tune around!

On the right-hand side of the Smart Controller lies the p.t.t. switch, and below this is a small **Toneburst** switch for repeater operation. Directly below the toneburst switch I discovered the **MONI** button, which enables the operator to open the squelch to monitor

weaker stations.

There's also the **LOW** button, for switching in one of the three power levels. These are 5, 10, and 50W on 144MHz, and 5, 10, and 35W on 430MHz. Lastly, there's the **PWR** switch, which is below the **LOW** button and doubles as a normal **On/Off** switch and as a control for switching from main to sub channels.

Small Unit

I must admit that I found the number of buttons and controls on such a small unit very off putting at first glance. I'm the type who prefers controls that I can get my fingers around!

However, upon further investigation, I discovered that using the MEK-2 Microphone Extension kit, I could connect a separate microphone to the rig in parallel with the Smart Controller. This would enable me to use a standard microphone, while mounting the Smart Controller on the dashboard, to be used only in controlling the transceiver, thereby making it more convenient to use while in a parked car.

Another accessory which came with the rig was a 'Separation Kit'. This kit enables the operator to install the rig itself in the boot of the car. With this, the fully detachable front fascia of the rig can be mounted on the car's dashboard, along with the Smart Controller, extension speaker and microphone if you wish.

Incidentally, the lead connecting the Smart Controller to the Yaesu FT-8500 is detachable from both the rig and the control unit. I found the connections at each end very small and somewhat fragile-looking, and I wondered if such connections would stand up to the 'rough and tumble' of mobile operation. Only time will tell.

The Transceiver

Upon inspection of the 'transceiver section' of the FT-8500, it seemed that I had gone from one extreme to the other! The rig itself has

OCTOBER ISSUE

**A Simple 2 Valve VHF Radio -
Part 2 of 2**

**International Air Tattoo '95 -
SWM Staff Report**




Stand up the Real Listener

**How The Wartime 'Y' Stations
Operated**

Mods. To Saisho R700D Portable

**Review - Sony Visual World Band
Reciever CRF-V21**

The Easy Dipole

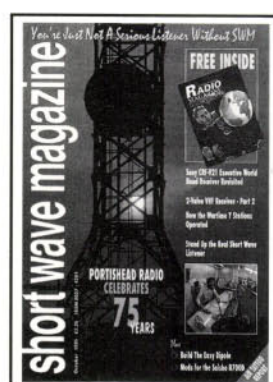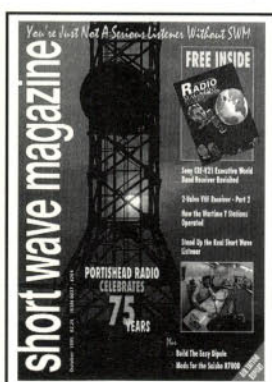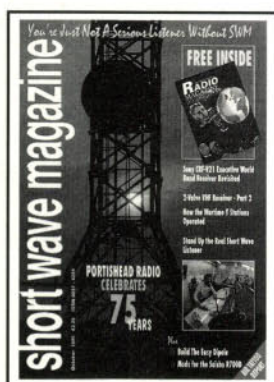

**Inside - FREE TELECOM 95
International Radio Magazine**

PLUS

Regular reports on every aspect of Short Wave Listening each Month

COMING IN NOVEMBER

**Review - Yupiteru MVT-7200
Scanner
There's Life in the Old Dog Yet!
International Short Wave
Broadcasting**

**R1155 External PSU and AF
Stage
Radio Austria International
Timewave DSP-59+ A User's
Perspective**

WXSAT Special

On Sale October 26, 1995

The dual-band antenna supplied by Sandpiper Communications.



only one control, along with a transmit indicator and a 'Auto Dimmer Photo Sensor' (this reduces the l.c.d. 'backlighting' automatically, according to the amount of light present at the time of operation.

The single rotary control on the main transceiver is multi-purpose. These include the **On/Off** switch, and a **Tuning** control for the **VFO** and **Memory** channels.

The rig is very compact, it only measures just 140 x 40 x 180mm, including the rear mounted fan and front control knob. The casing has a attractive black sheen finish, with the orange-yellow l.c.d. display providing a pleasant contrast to the eye.

The FT-8500's speaker is mounted under the top cover. I always find this more suitable to the operator than mounted within the bottom casing, and this provides 2W of audio output.

Connections on the rear of the FT-8500 are an 'N' type antenna connector at the end of 24cm of coaxial cable, a 13.8V supply lead with connector for the d.c. supply, a DATA jack for Packet operation and Computer Control (with the optional FIF - 232C Interface Box), and two 3.5mm mini 'phone jacks which enable the operator to connect two separate external speakers for both v.h.f. and u.h.f. reception while in dual-band listening mode.

The Handbook

I took some time to read through the handbook of the FT-8500, which was produced in both Spanish and English. The English section of the book is some 74 pages long, well written, taking the reader in stages from installation through to basic and advanced operation, and up to menu programming and custom settings.

It soon became apparent that this little transceiver contained a host of interesting features. Some of which, such as computer control, are more suited to base station operation rather than mobile operation, but nevertheless, I am sure that many amateurs will find them of interest.

The feature which most caught my attention was the 'Spectra Analyser' which I've already briefly mentioned. It's found within the lower section of the l.c.d. display.

As I've said...I was impressed! With the 'spectrum analyser' feature the operator is able to monitor activity above and below the main operating frequency. This can be either by a 'single sweep' or a 'continuous sweep'.

Pressing the **SPA** button for half a second

gives a single sweep for activity, while pressing for longer than half a second gives a continuous sweep. This enables the operator to constantly view activity within variable frequency limits within the bands.

The analyser appears on the l.c.d. display in the form of a bar graph with the main operating frequency at the centre.

This facility will also operate in the **MR** (Memory Recall) mode, thus allowing the operator to monitor activity on their chosen preset memory channels.

While using this set at home on receive the SPA facility came into its own! I found myself watching the activity above and below my receive frequency, then QSYing to any channel where I 'saw' activity on the Spectra Analyser.

Memory Channels

There are 112 programmable memory channels on the FT-8500. These are made up of 100 normal memories subdivided into 10 memory banks, and six 'special purpose' memories for each band.

Each memory doesn't only hold the desired frequency. They can also store other details such as repeater shift, CTSS tones, and split memory operation, for use with crossband working for example.

Although the rig has a Dual Tone Multi Frequency (DTMF) encoder/decoder for selective calling and paging purposes, I was unable to use it. This is because I knew of no one locally with the same facility.

However, I can see the potential for DTMF particularly within multi operator households, where an amateur may wish to be in communication with another member of the family. Likewise, the facility could be used by DX operators, wishing to notify other local DXers of specific openings on other bands via a v.h.f. or u.h.f. or paging/selective calling network.

On The Air

To get on the air Dave GW0JUI and I installed the FT-8500 in his car immediately upon obtaining the dual-band vertical antenna from Chris at Sandpiper Communications.

I only operated the rig at the lower setting for the most part of our transmissions. This was possible because despite working mobile from within the deep Cynon valley I was able to access the 144MHz repeater GB3WW situated west of Swansea due to the 'window' at the northern end of the valley. Contact was maintained on this repeater until we were at a higher location, when I asked for audio reports and other comments from station we worked.

I received favourable comments on the audio from stations working through the repeater. These ranged from "crisp and clear" to "nice and loud, fully quietening".

The received audio on the FT-8500 was quite good. Although I did consider that the small speaker was not really adequate, particularly if there was a high level of engine noise within the car itself.

I found that I had to turn the transceiver's volume control up to very nearly full volume in order to get a comfortable level of audio in the car. But this is not really a problem, as I would imagine that most serious mobile operators would normally use an external speaker.

I must admit that I did not expect good transmitted audio reports, due to the diminutive size of the actual microphone in the 'Smart Controller'. It measures just 5mm across, and 2mm in height, and I assumed therefore that I would have to speak very loudly into this tiny aperture in order to be heard!

But that was not the case, and I was requested to 'back off a little' on the microphone, as I was being received far too loudly!

During our tests on 144MHz, I decided to switch on the Spectra Analyser. And as we were receiving GB3WW on 145.775MHz, I was able to 'see' activity on the GB3BC frequency of 145.750MHz.


Later, Dave and I parked the car on Mynydd Gelligear, a spot near my home QTH on higher ground, where we tried 430MHz. After scanning the band, we found **Maurice GW1MWR/GW0JZN** (he has both 'A' and 'B' Class licences!) and **John GW0HNK** chatting away and joined them in QSO.

Dave did most of the transmitting on 430MHz, and again reports on signal and audio quality were requested from both stations. As on 144MHz, good reports were received from both stations, despite some 'white noise' which appeared on the band from somewhere.

Abundance Of Facilities

I must admit to have taken a liking to the 'rig section' of the FT-8500 and the abundance of facilities incorporated. These, such as the Spectra Analyser, and Dual Band Receive,

Leighton Smart GW0LBI and Dave Griffiths GW0JUI (in car) trying the FT-8500 on a breezy Welsh hillside.

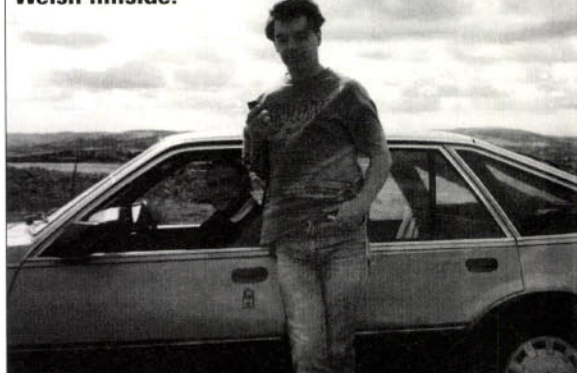

along with the smart appearance and its compact size rather appeals to me.

In operation, the reports and comments received indicate that the signal and audio qualities are more than adequate, with the same going for the receiver. I didn't notice any spurious signals whilst receiving, and no overloading of the rigs 'front-end' was apparent, although to be fair the level of activity was low when I was operating.

However, I couldn't get used to the Smart Controller at all. I found it complicated to use, particularly when actually on the move. I found that the number of controls on the controller were far too numerous for my liking, especially as the controls were on both sides of the unit. This led to some confusion during actual mobile operation.

Perhaps using the MEK-2 Microphone Extension Kit, where the Smart Controller is used **only** as a control unit, and with a separate microphone attached, could be an improvement. But I must confess that I don't like the idea of having all the controls detached from the rig's main body.

Having said that, the Yaesu FT-8500 may be the answer to many mobile operators, especially those with limited room under the dashboard. But I fear that having so many controls on such a small unit may detract from the usefulness of the rig itself which has a wealth of excellent facilities and functions.

I'm grateful to **Sandpiper Communications of Unit 5, Cwmbach Industrial Estate, Aberdare, Mid Glamorgan CF44 0AE. Tel: (01685) 870425** for the loan of the antenna, and to **Dave Griffiths GW0JUI** for his valuable assistance and mobile facilities!

Finally, my thanks for the loan of the review transceiver, which is available for **£749**, go to **Yaesu UK Ltd., at Unit 2, Maple Grove Business Centre, Lawrence Road, Hounslow, Middlesex TW4 6DR.**


PW

After seeing a copy of the Leighton Smart GW0LBI review, Barry Cooper G4RKO of Yaesu UK Ltd. sent us the following comments:

Leighton Smart's review gives a good flavour of the many facilities of the FT-8500. If he had been able to keep the radio longer (yes, we do ask for them back!) I am sure he would have discovered a whole raft of secondary features that can be accessed using the joy-stick control on the Smart Controller. These include such things as Battery Voltage indicator, CTCSS encode/decode, Memory Alpha tagging, extensive messaging facilities and CWID.

Yaesu is very aware of the safety aspects of using a transceiver when mobile and the provisions within the *Highway Code*. To this end, we strongly recommend that the Smart Controller is **not used** as a mobile microphone and that the MEK-2 kit is installed with a headset or boom-microphone. for hands-free operation. The Smart Controller can then be positioned in its holder to avoid leaning across the car to change bands, etc.

Barry Cooper G4RKO

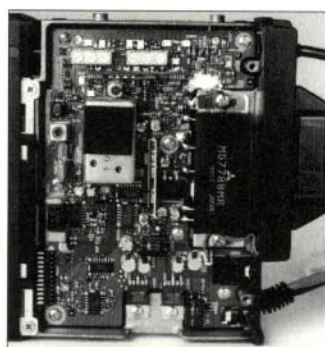

Internal view of the FT-8500.

The 'Smart Controller' (incorporating microphone) used on the FT-8500. Thanks to the PW Art Department we can show you both sides of this formidable-looking unit!

Manufacturer's Specifications

General

Frequency Range:

144 -146MHz & 430 -440MHz (plus non-amateur and airband coverage)

Channel Steps:

5, 10, 12.5, 15, 20, 25, & 50kHz

Frequency Stability:

±10 ppm from 20 to + 60°C. (v.h.f.)

Repeater Shift:

±5 ppm from - 5 to + 50°C. (u.h.f.)

Emission Type:

±600kHz & ±5MHz (Programmable)

Supply Voltage:

F3 (G3E) F2

Current Consumption:

11.7 - 15.9V d.c.

Receive current

<1 A.

Transmit current (Max)

v.h.f. (High power) 11.5A, u.h.f. 9A v.h.f.

(Mid power) 6A, u.h.f. 5A v.h.f.

Low power) 4.5 A, u.h.f. 4 A

Operating Temp Range:

-20 to +60°C.

Case size:

(w.h.d.)140 x 40 x 160 mm w/o knobs.

Weight:

(approx)1.1kg

Transmitter

Output (High):

50W (v.h.f.), 35W (u.h.f.)

Mid:

10W (v.h.f.) 10W (u.h.f.)

Low

5W (v.h.f.) 5W (u.h.f.)

Modulation System:

Variable Reactance

Max. Deviation:

±5kHz

Spurious Emissions:

> 60 dB below carrier

Microphone Type:

2kΩ condenser

Receiver

Circuit Type:

Double conversion superheterodyne

Intermediate frequencies:

1st 45.05MHz, 2nd 455kHz (v.h.f.)

1st 58.525MHz & 455kHz (u.h.f.)

(For 12 - dB SINAD) < 0.18µV (Main)

Sensitivity

< 0.25µV (Sub)

Selectivity:

(-6/-60dB)12/24 kHz

Image Rejection:

Better than 70 dB

Squelch Sensitivity:

Better than 0.13µV

Audio output:

2W into 8Ω for 5% THD


Audio output Impedance:

4 to 16Ω (8Ω internal speaker)

THE 1996 RSGB CALL BOOK

Did you miss out on your copy last year?

**Then make sure you get yours from the
RSGB Stand at the Leicester Show**

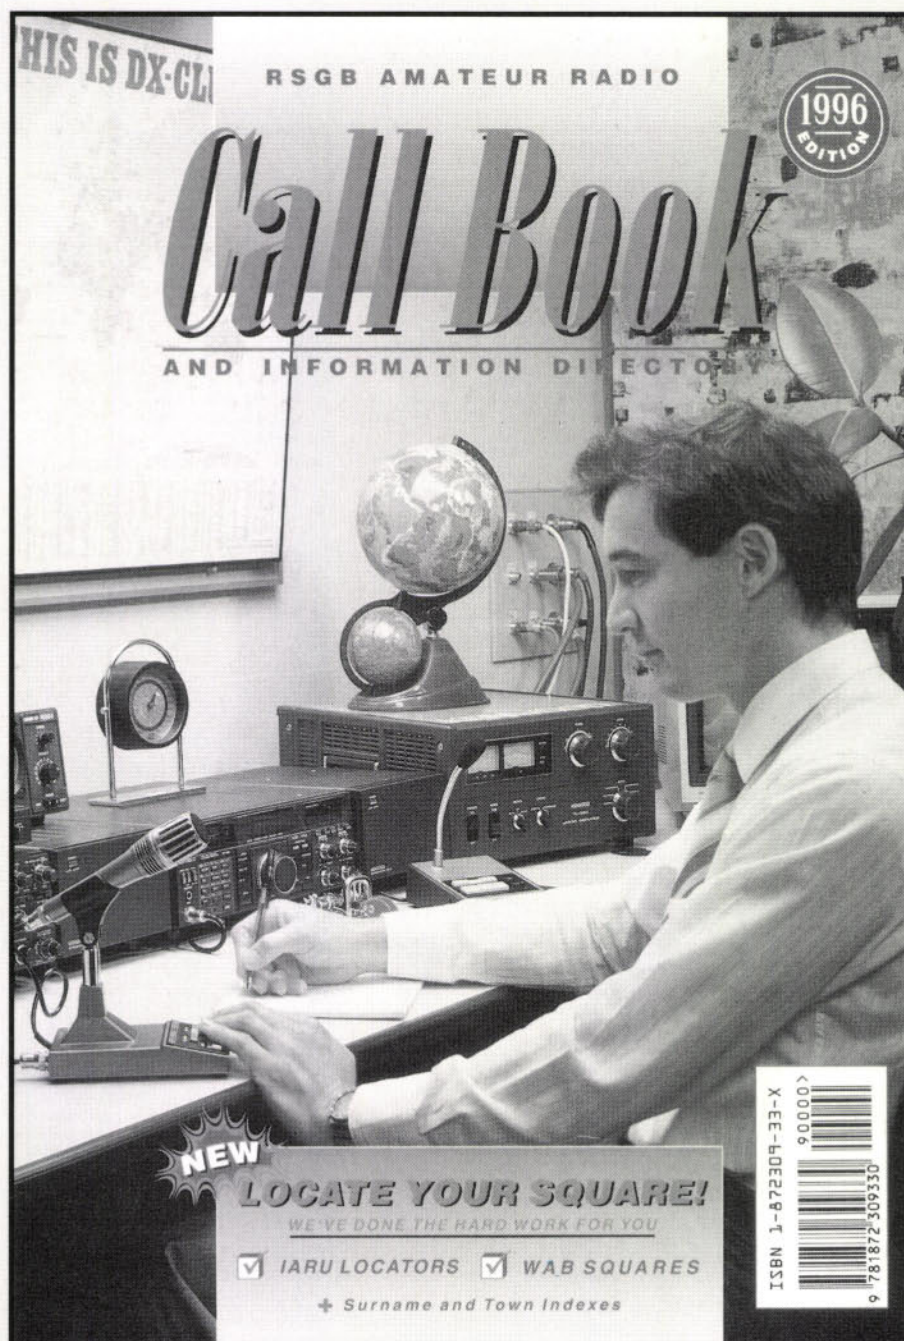

YOU CAN NOW SEARCH:

*by Callsign, Postcode
and Surname, and we
have even more fac-
ilities for you in this
year's super edition.*

*Callsigns listed in-
clude GOWJF; G7VOT;
2E0AMO and 2E1EIZ.*

RETAIL PRICE:

£11.23

plus £1.00 P&P

RSGB MEMBERS

*see RadCom
for offer
price.*

**The new RSGB Call Book will be available for the first time at Leicester.
Orders received prior to this date will be posted after the show.**



**Radio Society of Great Britain, Lambda House,
Cranborne Road, Potters Bar, Herts EN6 3JE**

DXpertise With Devereux

Mike Devereux G3SED asks have you ever wondered what it's like to be on the other end of a DX pile-up? After 30 years of operating in the UK, Mike found out what it's like and takes time off from his Nevada Communications business to share the experience!



Mike Devereux G3SED....at the other end of the DX!

My chance to find out what it's like at the other end of the DX came out of the blue one morning in a surprise telephone call from **Richard G4CVI**. "SMC have just landed the communications contract for Camel Trophy" he announced excitedly, "do you want to join the comms team"? Quite honestly I had never heard of Camel Trophy let alone why they would want comms equipment!

Richard went on to explain that Camel Trophy was a gruelling, four-wheel drive, off road adventure expedition held each year in remote parts of the world. He needed a team of five experienced people to install and operate commercial communications facilities including h.f. radio, Satcoms, Satnavs, v.h.f. and airband radio.

It was then Richard told me he felt there may even be an opportunity to mount an Amateur DXpedition. "Imagine" he added, "we can get paid...and play Amateur Radio". I thought it was a great idea and volunteered on the spot!

Exciting And Tough

The call from G4CVI was almost five years ago now, and since that time we have travelled and operated in some of the most exciting and toughest terrain in the world. We've travelled to the Jungles of Sabah Malaysia, to the spectacular falls at Iguazu, Northern Argentina, in the remote Atacama Desert of northern Chile and experienced the searing heat of Belize Central America.

It's funny, but once you are on the DXpedition trail, opportunities seem to come your way. It was **Geoff GJ4ICD** who in 1994 invited me to be part of the UK Six Metre group's expedition to Amman, Jordan, where we activated JY for the first time on 50MHz. When the band was closed I would operate the h.f. bands with my special callsign JY8ED.

Don't be misled though....while these events are enjoyable to take part in, they require months of meticulous planning and more health jabs than I care to remember! It can be a dangerous business stuck in the middle of a tropical jungle with tarantulas, scorpions, fer de lance snakes and all sorts of other 'creepy crawlies' - yes, I got to see them all!

The Team

For the Camel Trophy events the Amateur team comprises **Richard G4CVI**, **Paul G4CCZ**, **Andy**

G4PIQ, **Richard G8SVC** and myself **Mike G3SED**. We take around seven tons of equipment...including an 80ft trailer-mounted tower.

For h.f. operation we have two Yaesu FT-1000s an FT-900 with an Alpha 86 amplifier for good measure. Wire dipoles are used for 1.8/3.5MHz, and the main h.f. bands are catered for with a Create 714X monster beam. It has **three** elements for 7MHz and **five** elements for 14/21MHz!

A 3-element Cushcraft A3WS beam covers the WARC bands. For 50MHz we use a Yaesu FT-650 with a 6-element NBS yagi.

Operation From Malaysia

My first DX operation was from Sabah Malaysia as G4SMC/9M6. It was early afternoon when I decided to take a quick listen on 7 and 3.8MHz for any local activity. But both bands were completely dead - apart from S9 static!

It's strange how operating from Europe you become accustomed to the strong commercial and amateur signals audible during the day. In Malaysia there were just a few weak heterodynes and nothing else. I quickly discovered that this was the norm in Tropical regions - even 14MHz was relatively quiet during the day.

Once the sun began to set however, it was a different matter! The 7MHz band sprang into life with VKs audible several hours before dusk. And 14MHz would open to Europe about an hour before sunset and remain open for about five hours.

I think it's a fantastic experience to hear British stations from the other side of the world for the first time and compare their signal strengths. The 'boys with the beams' were certainly very strong. Stations including **G3FPQ**, **GM3POI** and **G3PCG** were amongst the loudest I heard...but they had some close rivals from unexpected quarters!

Strong Signal

Roger G3YRO surprised me when he called during a massive 14MHz pile-up with a strong signal on his 82m long wire antenna. His signal was only one S-point below the strongest Gs with beams.

The Camel communications vehicle set up in the Atacama Desert in Northern Chile.

Photo by Lee Farrant.





A 'swimming' LandRover on the Camel Trophy 1992 in Guyana.

Photo by Lee Farrant.

Presumably his antenna had a major lobe in the direction of Sabah, Malaysia, my QTH at the time.

The G5RV must be the most popular antenna in the UK. This must be so, judging by the number of stations I have worked using them whilst on my travels! These antennas put out consistent signals on all bands - but always several S-points below the loudest stations.

I found that even in the largest pile-ups my friends and fellow countrymen stood out, although they may be the weakest of signals. I can only assume the brain recognises these familiar call signs and gives them the equivalent of a 10dB boost!

Being confronted with an enormous pile-up for the first time is exhilarating. But controlling a wall of signals that may spread more than 15kHz across the band is another matter.

To overcome the problems I favoured working split frequency. This was so that I could be heard above

those people who insisted on calling continuously, regardless of who I was working.

Infectious Calls

Pile-ups are infectious, and some people give calls just because they hear others doing so. Then after working you they ask for your call sign!

I found many American operators insist on giving their name and QTH both spelt phonetically. This is fine for normal QSOs but it really slows things down for the others anxious to work a rare country for the first time.

The Japanese are superb operators. Despite their huge numbers they would always stop calling and wait patiently if requested to do.

The really slick operators would 'tail-end' giving their call sign just once at the end of my previous QSO. If done properly this procedure can be very effective and significantly increase the rate of contacts. The golden rule is to always **listen** first and understand what's happening before calling.

The I.f. bands are tough from the exotic locations near to the equator, there's S9 plus static being present almost 24 hours a day. However, I've always had a special interest in 1.8 and 3.8MHz so, I was determined to make a special effort on these bands.

"I talked to the trees, but they wouldn't listen to me!" Mike G3SED operating a Yaesu FT-77 high in the jungle of Mount Kinabalu, Sabah, Malasia.

Photo by Richard Diamond.



Northern Chile

When I arrived in Mejillones, northern Chile (CE1) I was delighted to find that Paul G4CCZ, and Nick G3K0X had been busy. They'd already erected an 'inverted vee' and sloping dipole for 3.8MHz at 30m high on our trailer

mounted tower, just a short distance from the sea.

I decided that the best time to work back to the UK was probably at my sunset. But when I got to the radio around 1600 local time and tuned around 3.795MHz to find just S9 static and no signals!

I listened around the top of the 3.5MHz band for the next hour without hearing a thing. Then just after 1700 I began to hear a weak signal in the noise - it was John G4PKP running a DX net. Slowly over the next 30 minutes or so his signal built to strength eight.

It was a particularly busy time for the Camel comms team, who were passing traffic to the convoy out in the Atacama desert. All I could do was to sit patiently and wait until they had finished before I could call in.

Time was ticking away and the opening was nearly over. I could not contain myself any longer. With my voice in a whisper, so as not to interfere with the others, I called John G4PKP.

To my surprise G4PKP came straight back with a strength eight report. But to my horror preceded to announce to the net that I must be a 'pirate' because he did not recognise my voice!

Just at that moment Richard G4CVI began to transmit on our commercial h.f. link rendering me helpless to respond to John's accusation. I sat there silently, in complete frustration for nearly 20 minutes until in a normal voice I was able to call John again, and convince him that I was genuine!

It was interesting to see that the sloping dipole showed some 6dB gain over the inverted Vee on the UK path at sunset. However, the 'sloper' did suffer from local noise pick-up.

'Top band' has proved to be the hardest band of all to work from these exotic locations. A combination of high static on 1.8MHz, locally generated noise and commercial interference have tested my ears to the limit.

From Jordan

When I operated from Amman in Jordan as JY8ED, I tried to use a sloping 1.8MHz dipole that Nick G3K0X had installed on top of the Marriot Hotel a week before my arrival. Unfortunately though the antenna was picking-up tremendous local noise together with an S9 plus broadcast harmonic on 1.835MHz. The combination made DX working impossible at the bottom end of the band.

It's in difficult situations that the determined DXer learns to improvise. With the help of Paul G4CCZ I hastily constructed a 'magnetic' loop antenna for receiving using parts 'borrowed' from the Hotel.

We used an old chair, a length of low loss Satellite TV coaxial cable, some poles and 'Gaffa' tape. A hasty trip round the electronics shops in Amman yielded a 750pF broadcast variable for tuning...and we were in business!

Working quickly we assembled the loop on the hotel roof. Then tuned and rotated it until we could null out the broadcast harmonic and most of the noise.

Although still difficult, the loop helped. We managed to work more than 100 Gs and other Europeans on what had been an impossible band.

Modest Equipment

Unlike the Camel Trophy DXpeditions, operating as JY8ED I had just modest equipment for the h.f. bands. The transceiver was an Icom IC-736 running 100W into a simple Windom 44m long wire

antenna mounted on the roof of the Marriot Hotel.

Since operating from many large international Hotels around the world, I've learnt that correct positioning of wire antennas for the l.f. bands is essential for good results. Most have flat roofs that are strewn with air conditioning equipment, lightning conductors, TV antennas, connecting cables and lift shafts.

The cluttered roofs tend to detune the antennas and cause noise or interference pick-up. The most effective solution (if possible) is to run sloping dipoles or Windoms from the top of the Hotel down into the grounds.

In Jordan the Windom antenna, although more than 60m above ground, had been installed just 4m above the roof by the previous v.h.f. team members. Its close proximity to the roof detuned the antenna and gave poor performance.

When I arrived I re-sited the Windom some 12m or so above the top of the Hotel roof with the help of a long pole. There were some anxious moments as I climbed on top of the Hotel lift shaft 70m above the ground to erect the antenna, but the results made it worthwhile! Paul G4CCZ and I worked more than 3,000 stations in over 200 countries during the few days we had for h.f. operation.

Invaluable Tool

The lap-top computer is an invaluable tool for DXpeditions. It serves as a log book, a propagation predictor, antenna designer, c.w. keyer and more.

The 'Miniprop' HF propagation prediction program by W6EL has been used frequently while on DXpeditions to identify when bands will open. By entering the current Sunspot number or solar flux, the location and date, the program predicts openings with remarkable accuracy.

I remember in Belize while operating V31RD, Miniprop had predicted 14MHz would probably open to Europe for just one hour around 0430 local time and it was right. If I had not seen it on the computer I would have missed this unexpected opening!

Geoclock, is another useful programme. It shows the 'greyline' terminator in real time, on a map of the world (ideal for the l.f. bands). And for h.f. it's used to give beam headings to all parts of the world.

New Friends

Travelling the world with amateur radio I've met and made many new friends from all walks of life. For example, in Jordan Paul G4CCZ and I were privileged to meet **His Royal Highness Prince Raad Ibn Zeid JY2RZ** who was keenly interested in our operation with the UK six metre group.

Another Jordanian amateur, **Mohammed Balbisi JY4MB**, Secretary of the Royal Jordanian Amateur Radio Society was very helpful. He spent a tremendous amount of his personal time to show us the sights of Jordan and ensure that we had everything we needed.

We have had fantastic co-operation from the Ministries responsible for licensing in the many countries we visited. With their permission it has been possible to provide and install 50MHz beacons in 9M6, V31, and JY.

The 1996 operation for Camel Trophy will be from Kalimantan Borneo with the HQ station




located at Pontianak on the West coast. Look out for us then and good DX!

PW

Richard G4CVI enjoying and working a 50MHz 'pile-up' from Camel Headquarters in Sabah.

On the roof of the Marriot Hotel in Aman, Jordan. Pictured (left to right) Tom DL7AV, Paul G4CCZ, Mike G3SED. Note the 'take off' to the UK!

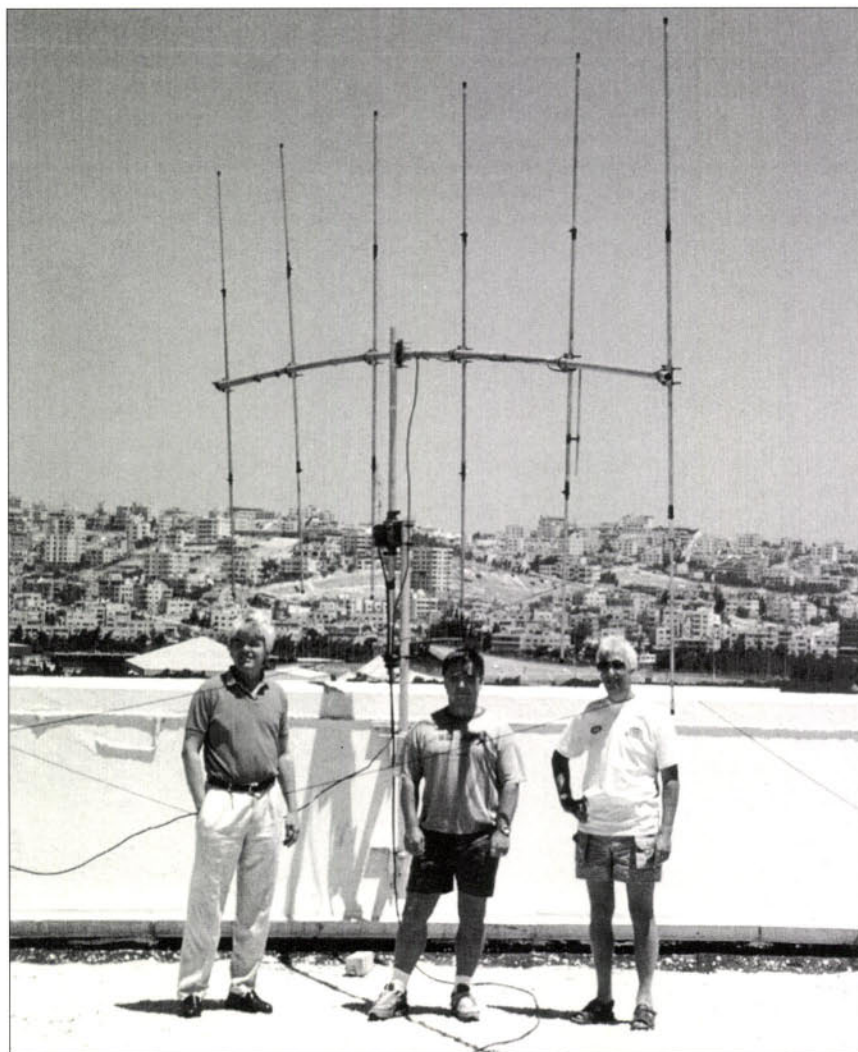

The High Flyer

Victor Goom G4AMW describes his 'High Flyer' shortened dipole antenna for the 18MHz band. The array uses an innovation which the author describes as an 'Indocap'.

The 'High Flyer' is a featherlight antenna that can be easily erected high in the air. And mounted at 12m and above I know from experience it will really perform.

An innovation (which I've called an 'Indocap') appears in my design. And I can prove practically that it works, I can also prove theoretically that it doesn't!

Working the world with a very small antenna is now possible. With the prototype antenna mounted at 12m I've worked stations from New Zealand to California.

The drawings, **Figs. 1 to 3** illustrate the project stage-by-stage. The four stand-offs can be taken from the pattern on the drawings. They should be cut and drilled, then secured with self tapping screws to the 660mm support, made from white Nylon material as shown.

For the two elements take a length of 8mm aluminium tubing (or 10mm if available), cut two lengths 825mm and two lengths 72mm. Drill 3mm holes about 12mm from the end of each of the longer lengths. These will take the 50Ω input at the centre of the antenna.

Next, using the two shorter lengths of tube, make two cuts (to form a cross) approximately 25mm on each tube. This will be pressed in to grip the tuning rods.

The two tuning rods are made from 330mm lengths of 4mm aluminium rod. These should now be inserted into the shorter sections of tubing. (File off any protective coating first!).

The Coils

For the coils you should first cut two 200mm lengths off the white plastic 15mm diameter tube. Then start winding the enamelled wire in a clockwise direction 25mm from the end of the tube then tape

down, leaving a short end of wire.

When you have 60 turns on the former, again tape down. Then strip the wire and solder to the end of the screen of the miniature coaxial cable (**note: the centre of the coaxial cable is not connected to anything**).

Then, wind on in the same direction 12 turns of the miniature coaxial cable. And again tape down, then solder a short length of stripped wire to the screen at this end of the miniature coaxial for connecting up.

Now take the prepared two pairs of coils on the flexible plastic tube and push the aluminium tube section into each end. The next steps in construction require the use of a small vice and drill.

At the coaxial cable end of the coil former there should be about 70mm free. Push the larger diameter tube in this end as far as the free distance (as per diagram). Then drill a 2mm hole 12mm from the end of the white plastic tube.

Next, place two washers on a 15mm long self-tapping screw and screw it into the hole. The stripped wire at the end of the coaxial cable can now be fixed to this point.

The tuning rods can be pushed into the empty end of the coil section and once again secured using 12mm self tapping screws. Repeat this procedure with the other coil element. The antenna can then be assembled with reference to the drawing, and the tuning rods adjusted to tune it on frequency.

Simple Secret

The simple and elementary secret of the 'High Flyer' antenna has taken me years to

figure out. I've always thought that there must be a way to reduce the size of h.f. antennas. In this regard, mobile antenna and magnetic loops seem to work better than their size would indicate.

With vehicles, on one hand there's the enormous capacitance of the car and on the other, a very large high voltage capacitor. And if you look at the dipole with very little capacitance you would say that the current really had no place to go. But if a way could be found to put some capacitance at the

Shopping List

Material Required

(All from major DIY outlets)

8mm (or 10mm) aluminium tube	3m
4mm aluminium rod	1m
15mm white plastic tube	1m
25 x 18mm white plastic bar	1m
10mm flexible clear plastic tube	1m
12mm kitchen chopping board	one
50Ω miniature coaxial cable	1m
Copper wire	50gm
bobbin of 0.71mm (22s.w.g.)	
enamelled copper wire (Maplins)	
Heat shrink sleeving	1m


ends of the dipole, a high Q, high current, but very short antenna could be made.


So, this was my problem, or to put it more accurately, to 'empty' one side of a capacitor while the other was being 'filled'. A number of ideas were tried with wires running through the elements, but no way could I phase them to stop them cancelling out to some degree.

Then I remembered a basic fact. Current going one way round a coil induced current in an adjacent coil to go the other way. So, here was the simple answer!

Put two windings in the current sections at each end of the antenna feeding either side of the capacitors, then when one plate was going positive, the other side would

Fig. 1: Overall diagram of the 'High Flyer' shortened dipole for 18 and 21MHz built by G4AMW.

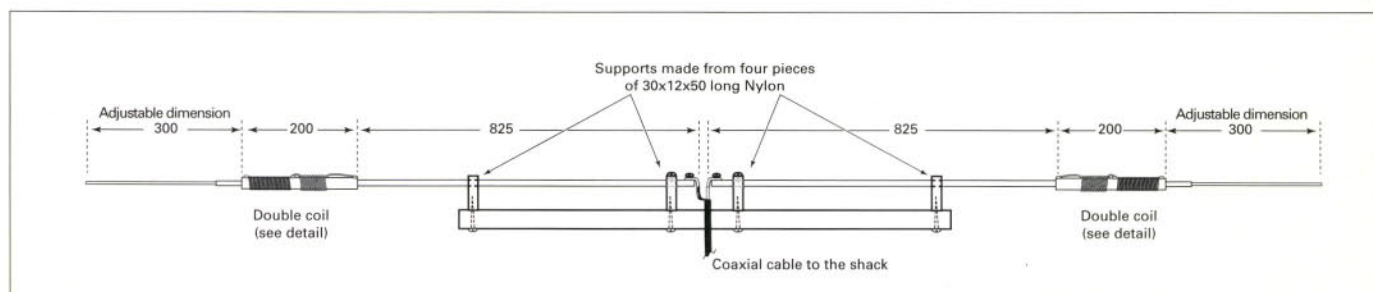

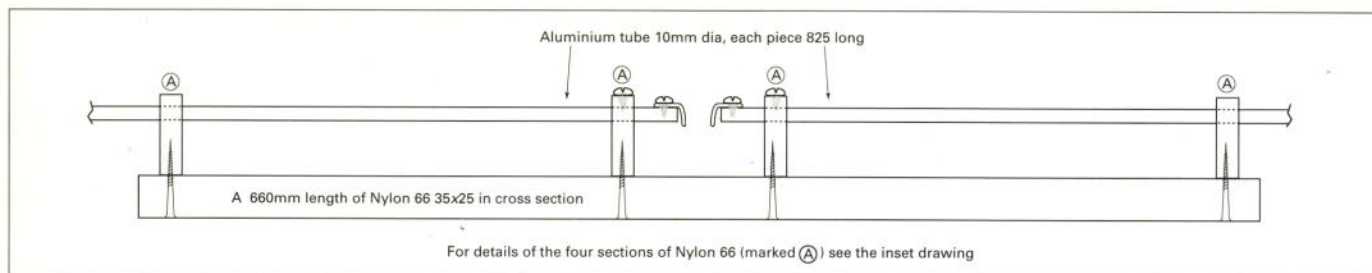

have the current induced out of it by the other winding.

Initially this did not work because of the inherent capacity of the coils was too large. I reduced this high capacitance by using wire with a thick plastic sleeve.

Then, to my considerable satisfaction, I found that with the aid of two variable capacitors, it was possible to tune the antenna over 3MHz and indeed proved the theory did work.

Other Antennas

I then made a number of other antennas using this principle and adjusting the amount and position of the capacity and noting that the inherent capacity of tightly coupled coils did the same job. This seemed to give a 'coiled spring effect', as the current moved one way it builds up opposite potential in the adjacent coil giving a reciprocal 'sling shot effect'.

The 'High Flyer' uses a short length of miniature coaxial cable to do duty as the inductive capacitor ('Indocap'). This is placed in the 'current' section of the antenna.

In my opinion the 'Indocap' introduces a whole new ball game into the design of shorter antennas. I have worked into VK using a 3.660m long antenna. And I've worked virtually world-wide with the 'High Flyer' on 18MHz and the longer version on 7MHz.

Please understand that this is an **experimental antenna**. And although it has now been up a few months, I don't know what wind pressure it will stand. Enjoy your DX and I hope you too have good 'High Flying' days!

PW

Fig. 3: Detailed diagram showing coil details and also illustrating the author's 'Indocap' coaxial cable innovation (see text for G4AMW's statements on the 'Indocap').

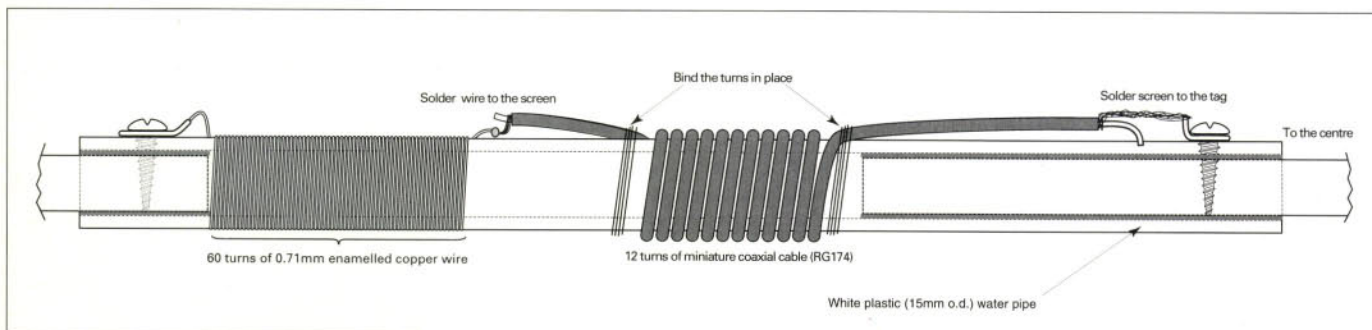


Fig. 2a: Close-up diagram illustrating construction methods used by G4AMW.

Fig. 2b: Shows a detailed view of the element mounting block (see text).

We asked Clive Hardy G4SLU to confirm the theories and design of the 'High Flyer' by building a version for the 21MHz band. Here's what he thinks:

Although Vic G4AMW has designed his antenna for 18MHz I thought it would be an interesting exercise to build one for 21MHz. I scaled every physical dimension down by 14%, making the outer element 200mm and the tuning stubs 240mm long (they slide into the outer element). The actual lengths of the elements and the insulated section are slightly different from the above to allow for mechanical connection. For the inner parts of the dipole I used 12.7mm* aluminium tubing and a dipole centre obtained from a local antenna manufacturer. The 15mm plastic tubing was from B&Q, as was the 10mm tubing used for the tuning stubs.

(*The suppliers describe it as 1/2 inch tubing, and sell it by the inch! - Europe? Never 'eard of it mate!)

Softened in boiling water, the plastic tubing can be fairly easily forced over the aluminium tube. The tuning stubs are held firmly with a hose clip. I cut four slots about 15mm long in the end of the outer elements, two of which I filed to about 3 mm wide, which allowed the ends to deform and the jubilee clips to do their jobs. I cut part of the plastic tubing away with a craft knife so that the self tapping screws hold the wire of the coils directly to the aluminium elements.

Tuning Positioning: I had initially 'guesstimated' the position of the tuning stubs. This gave a v.s.w.r. of about 10:1. Now, should I shorten or lengthen the antenna? Here I must drift off of the main subject for a few moments and mention the MFJ-259 HF/VHF SWR Analyser, borrowed from G1TEX (and very reluctantly returned!).

With the help of that piece of the MFJ antenna analyser unit I tuned the antenna to the middle of the 21MHz band in a few minutes. The MFJ-259 is a delight to use. It makes tuning antennas so simple, and it saved me a lot of time. Anyone who experiments with antennas really should think seriously about getting an antenna analyser.

But, back to the antenna. Eventually I ended up with an overall length for the antenna at 21MHz of about 2.4m overall.

I also found that my 21MHz version would also tune to 18MHz. The overall length at 18MHz is about 2.720m. I found that the 2:1 v.s.w.r. bandwidth was a little over 200kHz.

Performance testing: This was carried out on both 18 and 21MHz which proved that the antenna worked. Comparisons were made with wire antennas at different locations, but as the conditions were far from even similar for each antenna, the results cannot be given any credence. However, I worked all over Europe on 21MHz and Richard G0RSN (he's got 18MHz equipment) also managed a QSO down into Central Africa.

My knowledge of antenna radiation theory is insufficient for me to make any comment on the 'whys and wherefores' of the design. But I have tried a couple of changes which I suspect that most people reading this far down the article have already considered.

The modifications I tried were, joining the inner and outer of the coaxial cable. This produced no change in the resonant frequency of the antenna.

Joining the outer of the coaxial cable to the inner and the inner only to the 22s.w.g. coil increased the resonant frequency of the antenna by about 750kHz. Make of that what you will.

G4SLU

Chasing That DX!

Breaking The 100 Barrier

Chris Page G4BUE reminds us that DX-chasing has been around since amateur radio started. Then he sets out to encourage everyone...saying that you too can become a DXer!



Chris Page, G4BUE, at his operating position. The main rig is a Ten-Tec Omni VI behind the keyboard used for computer logging with Shacklog. Below the computer screen is the DX Edge and to right is a Ten-Tec Argonaut 535 QRP transceiver. Next to that is a Yaesu FT-840, back-up and /P rig, and on the extreme right is a Yaesu FT-726R for 50 and 144MHz. An Ameritron AL-1200 amplifier is on the right of the shelf above and the other boxes are filters, antenna switches, packet radio t.n.c., rotator control, keyers, etc. The lap-top computer on the right of the desk is permanently logged into the GB7DXS node of the UK DX PacketCluster system.

The term DX means different things to different people. But it's generally agreed that whatever it is, it is more difficult to work. This article is intended to get you started and help you work it easier.

In 1945 the American Radio Relay League (ARRL) started the DXCC programme. The basic certificate is awarded for confirmed QSOs with 100 countries on the DXCC Countries List (including 'deleted' countries), and certificates are available for different modes and bands.

Endorsements are issued for subsequent countries and when you are within ten of the total 'current' countries (326), you go on the 'Honor Roll' and in the annual listings in QST, the journal of the ARRL.

For many amateurs DXing is working their first 100 countries, then their second 100, breaking the 300 barrier, making the 'Honor Roll' and finally 'working them all' or becoming 'Top of the Honor Roll'.

Why Chase DX?

Enthusiastic DXers are sometimes asked why they chase DX. When asked, my answer is the same as the climber who's asked why he wants to climb a mountain - 'because it's there'!

Some amateurs say they cannot become DXers because they don't have mega-power or mega-bucks. But their answers are excuses, not reasons, because you don't need either! Amateurs have worked 300 countries with QRP (5W or less), and others with 100W and simple wire antennas.

Far more important than power and money is the ability to listen, with antennas and knowledge of propagation coming second and third. Only antennas need cost money, so nobody who wants to...has an excuse not to become a DXer!

Working your first 100 countries is reasonably easy if you simply vary your operating times and bands to take advantage of openings to different parts of the world. After this it gets more difficult and you then need to become a good listener.

Listen And Listen

Established DXers are often asked to give three pieces of advice to the newcomer and they reply 'listen, listen and listen again'!

You must listen to the station you want to work before you call! This may be stating the obvious but you need to make sure you can hear the DX station if they answer you.

You'll look silly if they call you and you don't respond because you haven't heard properly. Or even worse, you do respond but the station called someone else!

You must listen to instructions given by the DX station, such as asking for calls from a certain continent, country or call area only. The DX stations often have only brief openings to some parts of the world and want to use them to give amateurs in those areas a chance of working them.

The technique can seem frustrating. But on other occasions it's satisfying when a Pacific DX station asks a JA pile-up to QRX while they listen for Europe.

Often, DX stations often work by numbers, e.g. asking for calls only with a particular number in the callsign, and then moving on to the next number. Murphy's Law usually dictates you come across the DX station just after they've moved on to the number above yours!

My advice is that you listen to how many QSOs the DX station makes before moving to the next number. Then you can estimate when they will be back on your number.

Some DX stations may work 'split', in other words listening on a different frequency to their transmit frequency. You must also work split by listening to the DX station on one v.f.o. and using the other, or RIT, for your transmit frequency.

There are then two techniques. One is to find a reasonably clear frequency where the DX station is listening, stay on it and call each time the DX station says 'QRZ'. This is known

as 'calling blind' and is generally best when the DX station is jumping from one listening frequency to another, after announcing something like 'QX 14200-14210'.

Tail Ending

The other technique is 'tail-ending'. I prefer this method, especially when the DX station says something like 'QX 14200 up' or just 'up' on c.w.

You should listen to find the station working the DX station. This can be very difficult amongst the QRM of the pile-up especially if the skip is wrong.

After the QSO, you should call on the same frequency as the other station and if you're lucky the DX station will answer you. If they call another station then you must quickly find that station's transmit frequency.

If the frequency is the same as the one you called on then the other station probably has a stronger signal than yours, and you should call again after the QSO.

Sometimes, the next station will be slightly higher or lower in frequency than the one before. This indicates the DX station is slowly moving higher or lower after each QSO, in which case you move your transmit v.f.o. slightly higher or lower before you call.

Tail-ending keeps transmissions (and therefore QRM) to a minimum. Several DXers treat it as an additional sport to see how few calls they make to work the DX station.

The ultimate is to call just once. Although it may have taken them some time (often upwards of an hour) to pick the frequency on which to call, with the rest of the time spent tuning and listening

Split Frequency

Often, DX stations work 'split' to keep their transmit frequency clear so we can hear them better. We also hear stations calling on the frequency, sometimes accidentally using the wrong v.f.o., but more often it's because they are not listening!

In addition to advertising their poor operating by not listening, they 'wake up' the 'policeman'! Policemen are those operators who spend their time saying 'Split' on s.s.b. and 'Up' on c.w. on the DX station's transmit frequency each time someone transmits there.

The 'policemen' usually cause far more QRM than the offending station. This is because someone else (who cannot hear the original station) accuses the policeman of causing QRM.

Then someone else accuses that station of causing QRM and so we go on. Meanwhile, the DX station continues trying to work the pile-up oblivious to the commotion on his transmit frequency and wondering why their transmissions are not being heard, often resulting in the DX station going QRT.

The best advice is to **never** transmit on the DX station's transmit frequency (even if another station starts transmitting there). They usually quickly realise that something is wrong and QSY, either because they are not answered and/or they cannot hear the stations being worked by the DX station.

Self Discipline

Everything I've mentioned about listening so far can be achieved by learning and self discipline. But a good receiver with some form of filtering, especially on c.w., can further enhance your listening ability.

The debate on the best receiver is as diverse as the debate on the best car, best football team, etc. Everyone has a different opinion.

The newcomer should consider all the receivers within his or her price range. They should also listen to the opinions of those with similar operating styles and preferences. Finally, the newcomer should choose the receiver they feel is best for their use.

My main receiver is a Ten-Tec Omni VI, which I believe is the best for c.w. DXing on the l.f. bands. Working c.w. is my particular interest, but I would not choose the Omni VI if I used s.s.b. most of the time.

QRP Techniques

Keen QRP DXers are aware of the techniques used by their QRO colleagues, and they have a few extra of their own. When you give away

several S-points by using only 5W, you must find ways of making them up if you are to compete in the pile-ups.

If you are new to DXing and have a QRP DXer living close to you or at your local club make friends! They can help you a great deal because they can give you a lot of advice on technique.

For example, I found when unsuccessfully calling contest DX stations with QRP, that if I moved the v.f.o. 100Hz or so, I often got through. If still unsuccessful I moved 100Hz in the opposite direction.

The slight change in frequency makes the difference. It's the difference between being in the clear and heard, and being buried by the

on the h.f. band that the maximum usable frequency (m.u.f.) is rising or falling through. This is more so when the m.u.f. is falling, and are able to work DX stations easier than when you can a little later or earlier.

Efficient Antenna

However good an operator's listening ability and receiver is, an efficient antenna helps even further. Note that I said efficient as opposed to big!

Not everyone can put up beams **but everyone** can put up an efficient antenna. No DXer or QRPer must ever be content with an antenna that just 'works'.

Your antenna has to work to its maximum efficiency. This is true whether it's a TH7 at 20m or, and perhaps more so, a half-size G5RV strung at 7m between the house and a garden tree.

An efficient antenna also improves your transmitted signal. This fact is something well known to QRPers who cannot afford to waste any of their precious r.f.!

If a choice has to be made between purchasing an amplifier or a better antenna, then choose the antenna. The amplifier only improves transmitted signals.

An efficient antenna requires sound design and construction. It also needs good quality low-loss coaxial cable (or open-wire feeder) and connectors, an efficient and well constructed a.t.u. (if used) and perfect matching and adjustment.

I've spent hours adjusting antennas to get them working to their maximum efficiency. Amateurs with more antenna knowledge than me might say this desire for perfection is unnecessary as the difference, if any, it makes is so minimal that it doesn't matter.


The experts may be right, but I have found another advantage in trying for perfection in that I am convinced it does make a difference...in my confidence! And I believe confidence enables people to achieve more things than anything else.

'Playing' with antennas has contributed to the confidence I now have to go into pile-ups using QRP in the belief I will get through.

Once their antenna is working to its maximum efficiency, most QRP DXers remove all unnecessary accessories from the line between the transmitter and the antenna. Don't forget that every antenna switch, s.w.r. bridge, etc., has some attenuation.

Knowledge Helps


Knowledge of propagation helps identify the bands, days and times of day when it is easier to work DX. And to this end I keep a daily record of the WWV solar flux and 'A' and 'K' figures.

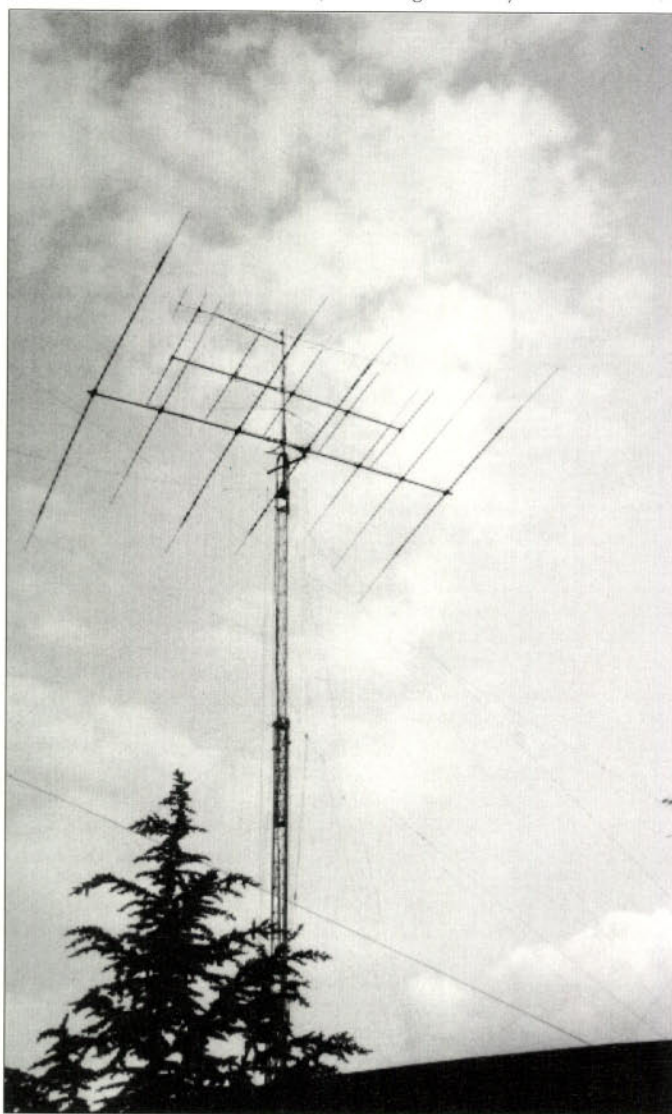

Outside the single tower (a guyed Strumech P60) supports a Hy-Gain TH7 yagi for 14, 21 and 28MHz at approximately 18m. There's also a home brew 5-element yagi for 50MHz above and a Várgadá 9-element yagi for 144MHz on top. A delta loop for 18MHz and an inverted vee for 24MHz hang from the tower. In the back garden is a four-square vertical array for 7MHz (which also loads on 10MHz), and there are also two top loaded phased verticals for 3.5MHz and an inverted L at approximately 14m high for 1.8MHz.

QRM generated by the contest.

I've also found that you appear to obtain some enhancement in signal strength by being

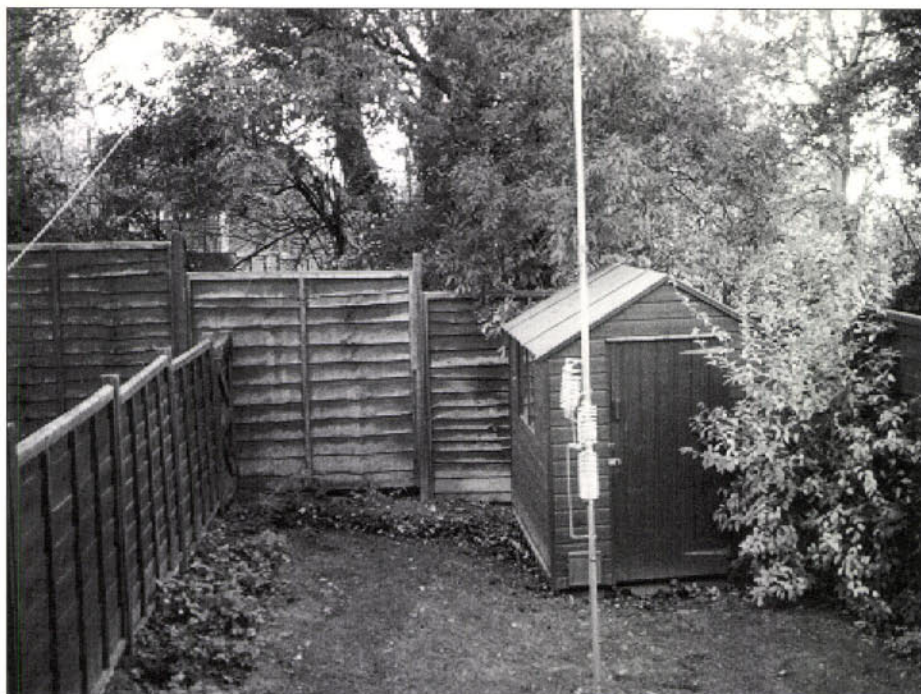

The garden of the QTH at Hastings used on weekdays for two years by G4BUE. The 'postage stamp' sized back garden was just big enough to put up a Butternut HF6V vertical antenna, (3.5, 7, 10, 14, 21 and 28MHz) which with 100W from a TS-440 enabled Chris to keep up his DXing.

By identifying the flux highs and lows in the 27 day cycle, I can forecast when the next high will occur and the likelihood of improved conditions. Rising K indexes usually mean good north/south paths on the l.f. bands and similarly these can be forecast.

The figures can be obtained by listening to WWV on 10 or 15MHz at 18 minutes past each hour. They're also available from the DX PacketCluster.

'Grey-line DXing' on the l.f. bands is well known and documented as is the contest advice to generally work the highest h.f. band open. And to help, 'The DX Edge' is a cheap (£12) simple device that enables you to identify the grey line and see what parts of the world are in daylight and darkness.

Contests

Contests increase DX activity. This is so because individuals and groups travel to 'rare'

countries for major contests like the CQ WW and WPX Contests, and on the Sunday often run out of stations to work.

So, Sundays are the time for QRPers and DXers with simple antennas to work them. Their ears are tuned to detect the weakest signal as they want every QSO. They're also generally good QSLers and they want you to work them in the next contest!

The DXpeditions

The DXpeditions can be the only way of working some countries. They are usually QRV for several days and unless you are one of the 'big guns', it's best to wait for the pile-ups to reduce a little.

You can find what DXpeditions are on by reading the DX columns of the monthly magazines, or subscribing to a weekly DX bulletins like the *DX News Sheet* published by the RSGB.

Although Chris doesn't want to 'blow his own trumpet' here..I'm going to do it for him by mentioning the fact he Edits the DX News Sheet and does a good job too! Editor.

Accuracy Essential

Accuracy is absolutely essential in DX operating. If your signal is several S-points down from others because you are using QRP or simple wire antennas, you cannot afford to make mistakes. On c.w. this not only means sending accurate code, but well spaced code.

Every QRPer knows

Murphy's Rule No.1: If you send your callsign three times making only one mistake, and the other station only copies your call once, it will be the one in which you made the mistake!

Because you may be a weaker station, don't send very slow c.w., thinking it makes up for it. Listen to a DX or contest station working a pile-up. They'll working to a rhythm and if you call them at a slower speed then you'll break their rhythm.

In addition to making it more difficult for the DX station to copy you, you'll slow down their rate and won't be popular, something to remember if you want their QSL card later!

Accuracy on s.s.b. is also important. Use clear phonetics that cannot be confused with other words or letters. Remember that phonetics which sound clear to English speaking amateurs may not be so clear to those whose natural language is other than English.

DX PacketCluster

The DX PacketCluster has taken some of the skill away from DXing. Not only can you now find out what DX stations are active, but receive messages on a computer screen giving their exact frequency at the time they are operating.

However, you still need to listen and use an efficient antenna if you want to be sure of working them. Well that's it, my summary of advice. All you've got to do is get on the band and hunt that DX. Enjoy yourself and I wish you the best of luck and good DX! **PW**




The ARRL 'Honor Roll' awarded to Chris Page G4BUE. This trophy is mounted on a polished wooden plaque and plays tribute to G4BUE's efforts and success in DXing.

Contact Addresses

Further information on the 'Honor Roll', etc., from **The DXCC Desk, ARRL HQ, 225 Main Street, Newington, CT 06111, USA.**

Further details on the RSGB's *DX News Sheet* and the 'The DX Edge' device are available from **the Sales & Marketing Dept., RSGB, Lambda House, Cranborne Road, Potters Bar, Herts EN63JE.**

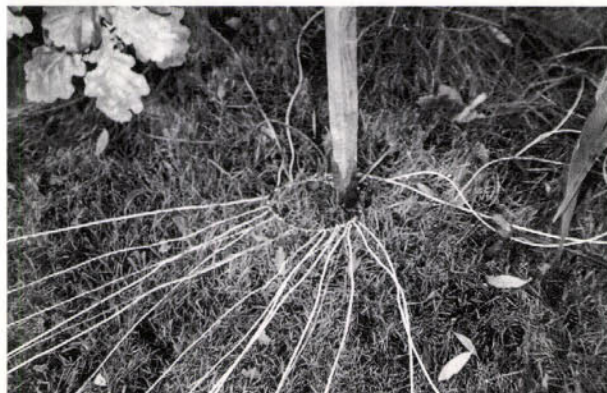

SATURDAY 18TH NOV

MARTIN LYNCH'S OPEN DAY

Last year nearly a thousand people poured through the door and grabbed tens of thousands of pounds worth of equipment at virtually trade price.

ICOM IC-2350H

Seems the boys at ICOM JAPAN must be working flat out with all the recent flurry of new models! If you are



**Only £649.00,
or £69 deposit and
12 payments of £48.33**

impressed with the IC-775DSP and the IC-706, check out this NEW DUAL BANDER.

Not just another dual band mobile, but ICOM's engineers have paid particular attention to the ever increasing problem with cross-modulation -

rendering a lot of current dual banders useless in today's RF laden atmosphere. No, they haven't hi-jacked all the paging transmitters up and down the country, (wouldn't be a bad idea though), instead they've used their RF knowledge to introduce a very clever RF attenuator linked to the squelch control. If the squelch is rotated past the 12 o'clock position, the RF attenuator is advanced until more than 10dB is introduced at full rotation. It works too!

TX out: 50W 144-35W 432. Coverage: 118-174-400-470

Simultaneous RX both bands Full Crossband duplex Built in duplexer 110 channel memory.

NEW FT-290RDX

We are now able to offer the new FT-290RMK2, with a muTek optimised filter supplied & fitted FREE OF CHARGE, a saving of £79!! The improvement to the receive performance is incredible. Better still, it's available on FREE FINANCE!



**Deposit £95,
12 payments of
£42.00.
Total: £599.00
FREE FINANCE
NOVEMBER ONLY.**

SPECIAL OFFER KENWOOD TS-450SAT



Bulk purchase of your favourite "midi" sized HF transceiver has enabled us to offer them on a spectacular money saving offer. The TS-450SAT is despite its size, a full feature 100W all mode HF transceiver, including a built in AUTO ATU, IF Shift and much more. The list price is £1649.00 but we are offering 10 pieces at only £1195 including FREE DELIVERY, saving a massive £450.00!!

Furthermore, it is available on FREE FINANCE at £196.00 deposit and 12 payments of £83.25

SAVE A MASSIVE £450.00

AEA PRODUCTS

- PK-12 Low cost budget VHF TNC now with FREE software..... **£119.95**
- PK-96 The easy way to get on 9k6 baud packet..... **£189.95**
- PK-232MBX All mode Data controller - the bench mark..... **£299.95**
- PK-900 The best selling commercial grade controller..... **£449.95**



'RADIO READY' PCs



In January 1995, Peacock Computers appointed MARTIN LYNCH as their sole retailer of "RADIO READY" PCs for the Amateur Radio market. Buying a PEACOCK PC from Martin Lynch ensures that the system is configured for your application, making it simple to employ as an ever important accessory in the modern radio shack. If you have wanted to buy a PC, but are

bewildered at the market with lots of terminology that makes you feel like a beginner to Amateur Radio, then contact MARTIN LYNCH for advice on how and why you should have a PEACOCK PC in your shack - TODAY! All systems include a full WARRANTY and are compatible with the entire range of AEA, KAM and other Packet and Data Decoding products.

SPECIAL OFFER!

For a limited period we are offering the ultimate in performance PENTIUM PC, and giving away a free multimedia pack including a 16-bit Soundblaster, Speakers and Quad-Speed CD - free of charge!

Pentium P90 PC

Take Mini Tower, 90MHz Pentium Processor
840 Hard Disk, 8Mb RAM
256K Cache, 1Mb PCI
14" SVGA, Dos, WFWG, Mouse, Keyboard.
Includes Windows 95 demo.

RRP £2239.00 Discounted to **£1899.00**

CONTACT STEVE
JELLY - OUR
DATA COMMS
EXPERT FOR FULL
INFORMATION

Now in it's FIFTH YEAR, our yearly extravaganza is upon us again, thing is can we top last year for the most people ever seen at one time in NORTHFIELDS AVENUE?

Kenwood UK are 'Co-Hosting' this year's event and the team from Watford will be on hand all day Saturday. Top personnel from Yaesu, Icom and Alinco will also be in attendance, including the Short Wave and PW crew with their excellent range of books. Make sure you visit the best one day event of 1995 - MARTIN LYNCH will actually forking out with Kenwood UK for all the FREE food and drink available all day.

**The doors are open from
9.00 to 6.00**

**Don't forget MORSE TESTS ON
DEMAND at Lynch's open day!**

MODEL MULTITRAP

NEW

Built exclusively for MARTIN LYNCH, the new wire antenna is trapped for 80 through to 10 metres, uses heavy gauge multi strand plastic-sheathed wire, heavy duty 1 kW traps and totals only 20 metres in length. The "MULTITRAP" is a fan type design, having 2 "legs" either side of the dipole centre. It's very easy to instal, takes minuets to tune, guaranteeing an SWR of less than 1.5:1 on spot frequencies throughout the entire 5 bands. A far better alternative to the old G5RV antenna.

SPECIFICATIONS

Impedance: 52 Ohm
Overall length: 20m
Power Handling: 1kW

Max SWR: 1.5:1
Weight: 2.5Kg
Input socket: SO239

Introductory price:

£69.95 p&p £7.50

Microwave Modules

Compare performance to cost with similar Linear Amplifiers from Tono, Mirage and others and you'll see just how competitive Microwave Modules '95 really is!

AMPLIFIERS

MML432-30 30W O/P 1 OR 3W I/P	£169.95
MML432-50 50W O/P 10W I/P	£169.95
MML432-100 100W O/P 10W I/P no pre amp	£399.95
MML220-80-10 80W O/P 10W I/P	£179.95
MML144-200 200W O/P 3/10/25W I/P	£339.95
MML144-100-10 100W O/P 10W I/P	£179.95
MML144-100-3 100W O/P 3W I/P	£199.95
MML144-30LS 30W O/P 1/3W I/P	£99.95
MML70-30-3 30W O/P 3W I/P	£99.95
MML70-100-10 100W O/P 10W I/P	£179.95
MML70-100-25 100W O/P 10W I/P	£179.95
MML50-30-3 30W O/P 3W I/P	£99.95
MML50-100-25 100W O/P 25W I/P	£179.95
MML50-100-10 100W O/P 10W I/P	£179.95
MML50-100-3 100W O/P 3W I/P	£199.95

TRANSVERTERS

MMT50-28 10M to 6M, 10W	£199.95
MMT70-28 10M to 4M, 10W	£199.95
MMT144-28 10M to 2M, 10W	£199.95
MMT220-28 10M to 1.5M, 10W	£199.95
MMT432-28 10M to 70CM, 10W	£199.95

HEIL SOUND

Heil Proset-5 Professional Quality Boom Headset, dual padded earphones, flexible mic boom, includes HC-5 "Full range" insert for superb speech quality. Requires AD-1 cable ADAPTOR for KENWOOD/ICOM. **£119.95 incl. VAT**

Heil Proset-4 Identical to Proset-5, but includes HC-4 "DX" microphone insert. Ideal for punching through the pileups. **£119.95 incl. VAT**

Heil HC-4 Replacement microphone insert for existing fist or base microphones. With 10dB peak at 2KHZ and the low end rolled off sharply at 500HZ, (12DB per octave), the HC-4 is the ultimate DX mic insert. **£28.95 incl. VAT**

Heil HC-5 Identical to HC-4, but High Articulation, offering superb SSB quality, rolls off sharply under 350HZ and above 3100HZ, peaking at 2.4KHZ. "Hi-Fi" SSB Audio. **£28.95 incl. VAT**

Heil AD-1/KY Adapter leads to interface the proset Headset/boom microphones to 8 pin Yaesu, Icom or Kenwood transceivers. **£11.95 EACH**

IF YOU DON'T WANT TO TAKE ADVANTAGE OF MY FREE FINANCE AND WOULD RATHER PAY CASH, CHEQUE, CREDIT CARD OR TRADE-IN, THEN CALL 0181 - 566 1120 TODAY FOR EXPERT ADVICE. I promise you the best overall deal in the U.K. Get ringing, or you'll miss the bargains!

*Please NOTE prices & monthly payments are based on 17.5% VAT & no more price increases!
E&OE. £10 p&p on all major items.

Martin Lynch is a licensed credit broker. Full written details are available on request.



**OPENING HOURS
MON-SAT
9.30 - 6.00**

Late night Thursday by appointment

FAX: 0181 - 566 1207

AFTER HOURS: 0973 339 339

B.B.S.: 0181 - 566 0000

**140-142 NORTHFIELD AVENUE
EALING, LONDON W13 9SB**

0181 - 566 1120

A DAY TO REMEMBER

PAY ATTENTION! READ THIS...

BARGAIN or BANGER?

You know the scene. Been down to the local store and seen a rig the sales guy says you can't live without. All you can think about is that really clean, (well, it was a bit dirty and marked but HE said it'll clean up OK - ONCE YOU GET IT HOME), YOU'VE got to have it. How many owners has it had? "Search me" says the really nice salesman. (Have you noticed how nice people are when they want your money?) Has it been serviced? "Yeh, the bloke who owned it did, I think". Has it got all the bits? "Yeh, somewhere".

YOU GET THE PICTURE. BUYING A RADIO OR A CAR, WE'VE ALL BEEN THERE.

You can't hold on any longer, you ring up and spew your credit card out like a machine gun. Can I have it tomorrow? What about yesterday replies the salesman!

4 weeks later it turns up. In the light that "really clean" radio looks like its been left in a shed for 10 years. (Funny that, in the dimly lit shop it looked quite good). The handbook is all torn and pages are missing. The lead is damaged because the bozzo who packed it "threw" the radio on top of the plug before it was dispatched. The accessories are noticed because of their absence.

STILL SOUNDS FAMILIAR? IT GETS WORSE.

Just when you think it couldn't get any bleaker, you tell yourself the book isn't really that important. The lead you can borrow off the only other radio in the shack, (you didn't want to use both anyway), the dirt and grime ground into the cabinet that Domestos TRIPLE STRENGTH won't shift and the paint missing doesn't really effect the value. (OH YOU DON'T THINK SO?!!), and who needs ALL the case screws, anyway? You finally pluck up the courage to plug it in. It doesn't work. Then your nightmare really begins.

I WON'T GO ON. MOST OF YOU ARE ALREADY FIDGETING ABOUT IN YOUR CHAIR. I DON'T BLAME YOU EITHER.

Buying MAIL ORDER, especially if its used, can be real trouble. Retailers in any market place "pop up" and will try and sell you their "BARGAIN". Only when you fork out, get it delivered and the above happens the "RISK" of buying from a less "REPUTABLE" outfit becomes a reality. Yes, you have legal rights. You are usually protected by the credit card company for a start. You are protected by the Trading Standards. But do you really want the hassle? It all takes time and worry. Time that you could have spent ENJOYING your hard earned cash playing with your NEW TOY from a respected dealer.

Whilst other retailers went bust or sold out because of their lack of effort in the CUSTOMER CARE DEPARTMENT, or just plain gave it all away permanently, (a little profit does pay for the engineers, Quality Control, Salesmen who actually know what they're talking about). MARTIN LYNCH continues to make his customers No. 1.

WHEN YOU BUY FROM MARTIN LYNCH

- ✓ The chance of 5 years warranty
- ✓ Workshops on site for repairs
- ✓ Competitive prices - permanently
- ✓ The largest choice of new & used amateur radio equipment in Europe

MARTIN LYNCH
G4HKS

THE AMATEUR RADIO EXCHANGE CENTRE



Make a note in your diary - that's Saturday 18th November

ALINCO DJ-G5

Currently our best selling Dual Band Handie. Simple to use, beautifully built.

£479, £79 deposit and 12 payments of only £33.33, ZERO INTEREST

KENWOOD TS-850S

With the introduction of the new DSP TS-870S, we have a limited selection of its best selling predecessor, the ever so popular TS-850S as "trade-ins"

For those of you that don't have to have the very latest in techno wizardry, the TS-850S, introduced almost 5 years ago, has sold in thousands since its



introduction. Due to the new model being announced we have a limited selection of nearly new TS-850's all offered with a "better than new" warranty of a whole FIFTEEN MONTHS. At only £1295 for a TS-850SAT (with tuner) and £1195 without, this represents a massive saving of almost £700 off RRP.

Please call before placing an order. Finance also available.

SAVE £700 OFF NEW RRP!

ICOM IC-775DSP

We've sold the '775 for some six months now. Thirty have found their way into top DX'ers homes, through MARTIN LYNCH alone. They didn't buy because old LYNCHY was the cheapest. (They didn't pay anything like full whack, either). They bought the ICOM FLAGSHIP from a company that understands HF equipment. From a company that sponsors (for no commercial gain) the RSGB HF Convention. Each Year. If you want to speak to any of the 30 satisfied owners who bought their IC-775DSP from MARTIN LYNCH then call him personally. With the owners permission he'll put you in contact. Then you too will be convinced that the extra £50 or £100 quid off LYNCH's price may not be cost effective at all. Perhaps it was the FIVE YEAR WARRANTY, who knows. If you're serious or just curious call MARTIN direct on 0181 566 1120.



ALINCO DX-70

If you want a mobile size HF transceiver with 6 metre operation as well then look towards the DX-70 from Alinco. 100 watts and general coverage, the new transceiver "surprised the world" as quoted by Chris Lorek, G4HCL.



DX-70 at only £1095 on FREE FINANCE, £96 deposit and 12 payments of only £83.25. ZERO APR.

YAESU FT-990AC

FREE YAESU FILTER OFFER WORTH OVER £178!!

Or DC, if you want it with an internal PSU as well as an AUTO tuner then we can oblige. The FT-990 is acclaimed as the THOROUGHbred in its class. Our massive purchasing power still allows me to offer them to you at pre price level increases and even more discount! Then, YAESU UK go and throw in two optional filters FREE. Whatever next? Dinner with MISS YAESU UK, Shirley? Surely not.

AC model: RRP £2399. LYNCHY PRICE: £1849.00
DC model: RRP £2099. LYNCHY PRICE: £1599.00

LIMITED STOCKS - PHONE BEFORE PLACING ORDER

YAESU FT-736R

Still the reigning ALL MODE QUAD BAND CHAMPION.

Call for the latest profit bashing price! 0181 566 1120



NEXT TIME YOU WANT TO BUY A NEW OR USED RIG OR ACCESSORY THINK MARTIN LYNCH FIRST. HIS REPUTATION IS HIS WATCHDOG. ASK ON THE RADIO ABOUT HIS QUALITY OF SERVICE NEXT TIME YOU'RE ON. WE THINK YOU'LL BE PLEASED WITH THE RESPONSE.

KENWOOD TS-870S



FREE FINANCE & FIVE YEARS WARRANTY!

First in the country with stocks, MARTIN LYNCH is offering the new ALL DIGITAL transceiver on an introductory 50/50 purchase plan and giving away FIVE YEARS WARRANTY FREE OF CHARGE!

TS-870S £2399.00 - WITH FREE 5 YEAR WARRANTY

DEPOSIT 50% £1199.00 (or your trade in's as part payment)

Balance £1200.00

12 monthly payments of only £100.00. INTEREST FREE ZERO APR. offer ends November 1995.

YAESU FT-1000MP

And in the blue corner.....

I just love how all three of the top players bring out new models - at the same time!



Don't complain. It fuels my second hand selection with trade-in's and gives you a great choice. The FT1000MP is the only HF transceiver to sport DSP and good old COLLINS filters, just like your uncle used to use in his famous "S" Line. The result is audio that sounds "alive" and attracts more queries when demonstrated at the London Showroom, than raffle ticket holders around the Yaesu stand at Leicester!

FT-1000MP RRP £2849.00.

Additional filters valued at £468.00, THROWN ON FREE! or FIVE YEARS WARRANTY - YOU CHOOSE, ITS A TOUGHY!

ICOM IC-706

The only company able to offer the RSGB one for review? Being the largest ICOM dealer in the U.K. (along with Yaesu and the others), does have its advantages. They are in stock. No cuddly toys. No free this or that. Just a FREE FIVE YEAR WARRANTY thrown in!



CALL THE SALES DESK FOR YOUR TAILOR MADE FINANCE DEAL.

The St Brandon DXpedition

To be born lucky enough to live and work on the paradise island of Mauritius is one thing, but to have St Brandon included in your work schedule is something else! Jacky (Seewoosanker) Mandary 3B8CF and Paul Fry G0FUS (Seewoosanker) Mandary 3B8CF and Paul Fry G0FUS unravel the background behind a 3B7 DXpedition.....

The St Brandon group of islands, (Cargados-Carajos Archipelago) are located north east of Mauritius, at a distance of approximately 400 kilometres at 16-17° south and 59-60° east, in DX zone 39. The whole group occupies an area of 900 square miles and consists of many islands and islets ranging in size from less than a quarter of a mile square up to four miles square.

In 1810, the Isle de France, which had been under French rule, was taken and occupied by the British and subsequently renamed Mauritius. St Brandon is actually a collection of islands from within a larger group known as the 'Lesser Dependencies of Mauritius'. These islands are administered from Mauritius and a link is kept between them by ship.

The Dependencies

Since 1921 the dependencies have remained the same, Chagos Archipelago, Agalega & St Brandon. All these islands lie south of the Equator, north of the Tropic of Capricorn, in total having a land mass of 47 square miles. The Chagos Archipelago consists of six groups of islands, the largest of which is Diego Garcia.

Agelaga consists of a north island and a south island. The St Brandon group consists of varying sized islands, inasmuch that during certain times of the year, some may be totally submerged, especially in the cyclonic season.

Principal Islands identifiable on a journey through the group are Frigate Island (the most southerly), Pearl Island (the most westerly), Albatross Island (the most northerly and the most inaccessible, the largest and the most fertile), Turtle Island, Lavocaire Island (former HQ of the group in the eighteenth century), Raphael Island (the current HQ), Shark and Cocos Islands, North Island, Siren Island, Poulailleur and Puits-a-Eau Islands.

Extreme Damage

The whole group of islands have, over the years, suffered extreme damage during the cyclone season, especially in 1947. This when an island called Avocaire, which had a small population of fisherman, was totally submerged.

The main industry of the group is fishing and the most profitable grounds lie in the Grand Carreaux. Navigationally, the island group is treacherous and many lives have been lost in the past, with ships disappearing without trace, others floundering on the coral reefs.

The French, when in occupation of Mauritius, set-up their great naval blockade against the British. They harassed the trade routes so much around the islands, that the final sea battle to take Mauritius is one of the most memorable in British and French history. The fact that the British Navy suffered tremendous losses in the process of taking the island proved the urgency of the matter, as the Fleet was practically annihilated during the battle.

Raphael Island

The 3B7 DXpedition was conducted wholly from Raphael Island, the focal point of the group. It houses a meteorological station, shop, hospital, administrative office and small residence, a fishery processing plant and not forgetting the Overseas Telecommunication Services Satellite Installation for telephone, FAX and telex systems.

This brief description of Raphael Island may not appear unduly spectacular. That's until the dimensions of the island are revealed as being only two hundred and fifty by one

hundred and fifty metres in size. A good drive with a golfclub should clear the island and land in the sea! All radio amateur activity takes place on Raphael, as it is the capital of the group, with all the essential amenities at hand, including the diesel generators supplying power to the island.

Hectic Life

Jacky (Seewoosanker) Mandary 3B8CF lives in the house he built himself, in a quiet cul-de-sac off the main Vacoas Road, near Victoria Hospital at Quatre Bornes on Mauritius Island. The huge Caudos hill lies so near to his QTH that it is possible to pick out Jacky's house from the summit.

Jacky lives a fairly hectic life, compared to many Mauritians, who by far prefer to sit back in the shade and gossip the time away. When not working, Jacky's idea of relaxation is to work harder! He is currently busy adding a first floor extension to his house, increasing the space available, possibly to house the deluge of QSL mail for the 3B7 DXpedition!

On this paradise island, Jacky lives with his wife Shakil, two sons, Kevin and Ashwin and daughter Varisha. Besides his keen enthusiasm for amateur radio, he adores spending time with his delightful family, playing the classical guitar and reading.

continued on page 45

Jacky (Seewoosanker) Mandary 3B8CF.



The Leicester Amateur Radio Show
Committee

Invite you to the

**Amateur Radio, Electronics
and Computer Show**

at the
**Granby Halls,
Leicester**

on Friday & Saturday 20th & 21st October

Friday 10.00 am – 6.00 pm

Saturday 10.00 am – 5.00 pm

Admission

ADULTS £1.50

Concessions for
Children and O.A.P.s

Enquiries to Frank
G4PDZ on
0116-287 1086



NOW EVEN
BIGGER AND
BETTER

MORE THAN A
HUNDRED
EXHIBITORS

BRING & BUY

LEICESTER

Sales Hall

1/2	Gemini Electronics
3	Taurus Electronics
4	Harwood Trading
5	Amstrutt
6	L.M.W. Electronics
6a	Lake Electronics
7	K.M. Publications
8	South Midlands Communications
9	JPE
10	Timestep
11	Sandpiper Communications
12	Weirmead
13	Display Electronics
14	Strumech Engineering
15	Waters & Stanton
16	Telford Electronics
17	Mutek
18/19	JMG Electronics
20	Officeland
21	J.A.B. Electronics
22	Eastern Communications


22a	QRP Components	45
23	H. Morgan Smith	46
24	Satellite Surplus	47
25	Martin Lynch	48
26	Barenco	49
27	J. Birkett	49a
28/29	R. J. Holderness	50
30	Syon Trading	51
31	Capital Products	52
32	Electrocomp	53
32a	Wilson Valves	53a
33	Mainline Electronics	54
34	Dataphone	54a
35	Nevada	55
36	L & S Components	56
37	A1 Electronics	57
38	J & P Electronics	58
39	Len Cooke	59/60
40	M & B Radio	61
41	ARE Communications	62
42	S.G.S. Electronics	63
43	Brial Services	64
44	Coltec Electronics	

Exhibition Hall

1	RSGB
2	Icom (UK)

3/4 Practical Wireless & Short Wave Magazine

5	Linear Amp UK
6	Haydon Communications
7	2J Sounds
8	Microgenius
9	Venus Electronics
10	Siskin Electronics
11	Howes Communications
12	Poole Logic
13	Trio-Kenwood
14	Alan Hooker
15	Videoquip
16	Lowe Electronics
17	Yaesu
18	Tennamast
19	Field Electrics
20	R.A. Kent
21	Mailtech
22	
23	Rich Electronics
24	R & D Electronics
25	U B M

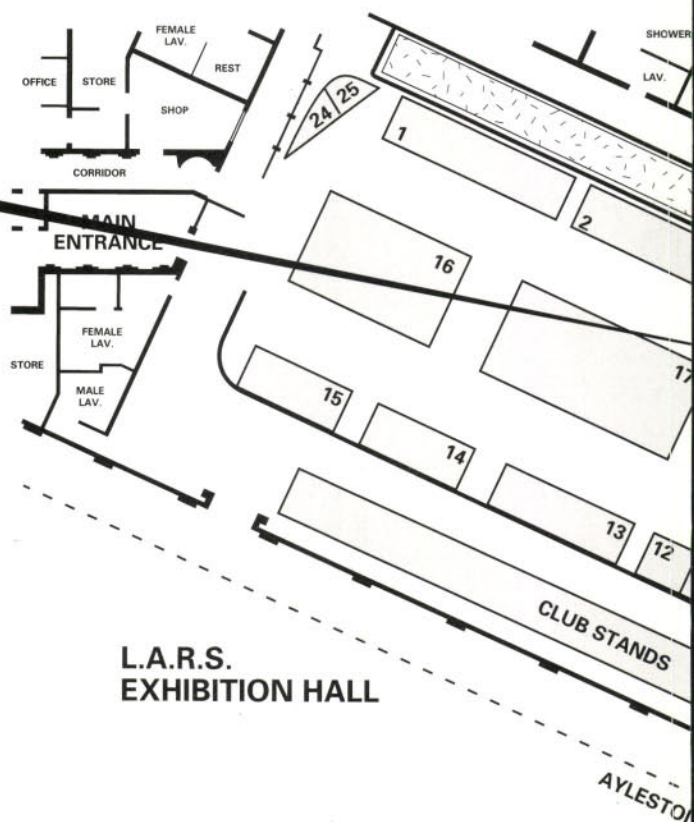

Details correct at time of going to press.

ER 1995

Tables


A.J. Paddon
(R.A.S.) Nottingham
Computer Junk Shop
Oasis Computers
Giacommelli
Westlake
Radiotronics

Ham Radio Products
PTV Electrical
Kanga Products

Amateur Radio Communications
Strikalite
Eagle Antenna Co.
3R Cardware
S.E.M.
G.C. Arnold & Partners
Badger Boards
RN Electronics
Dee Comm
Radio Shack
Loutronnics

Bonex

L.A.R.S. SALES HALL

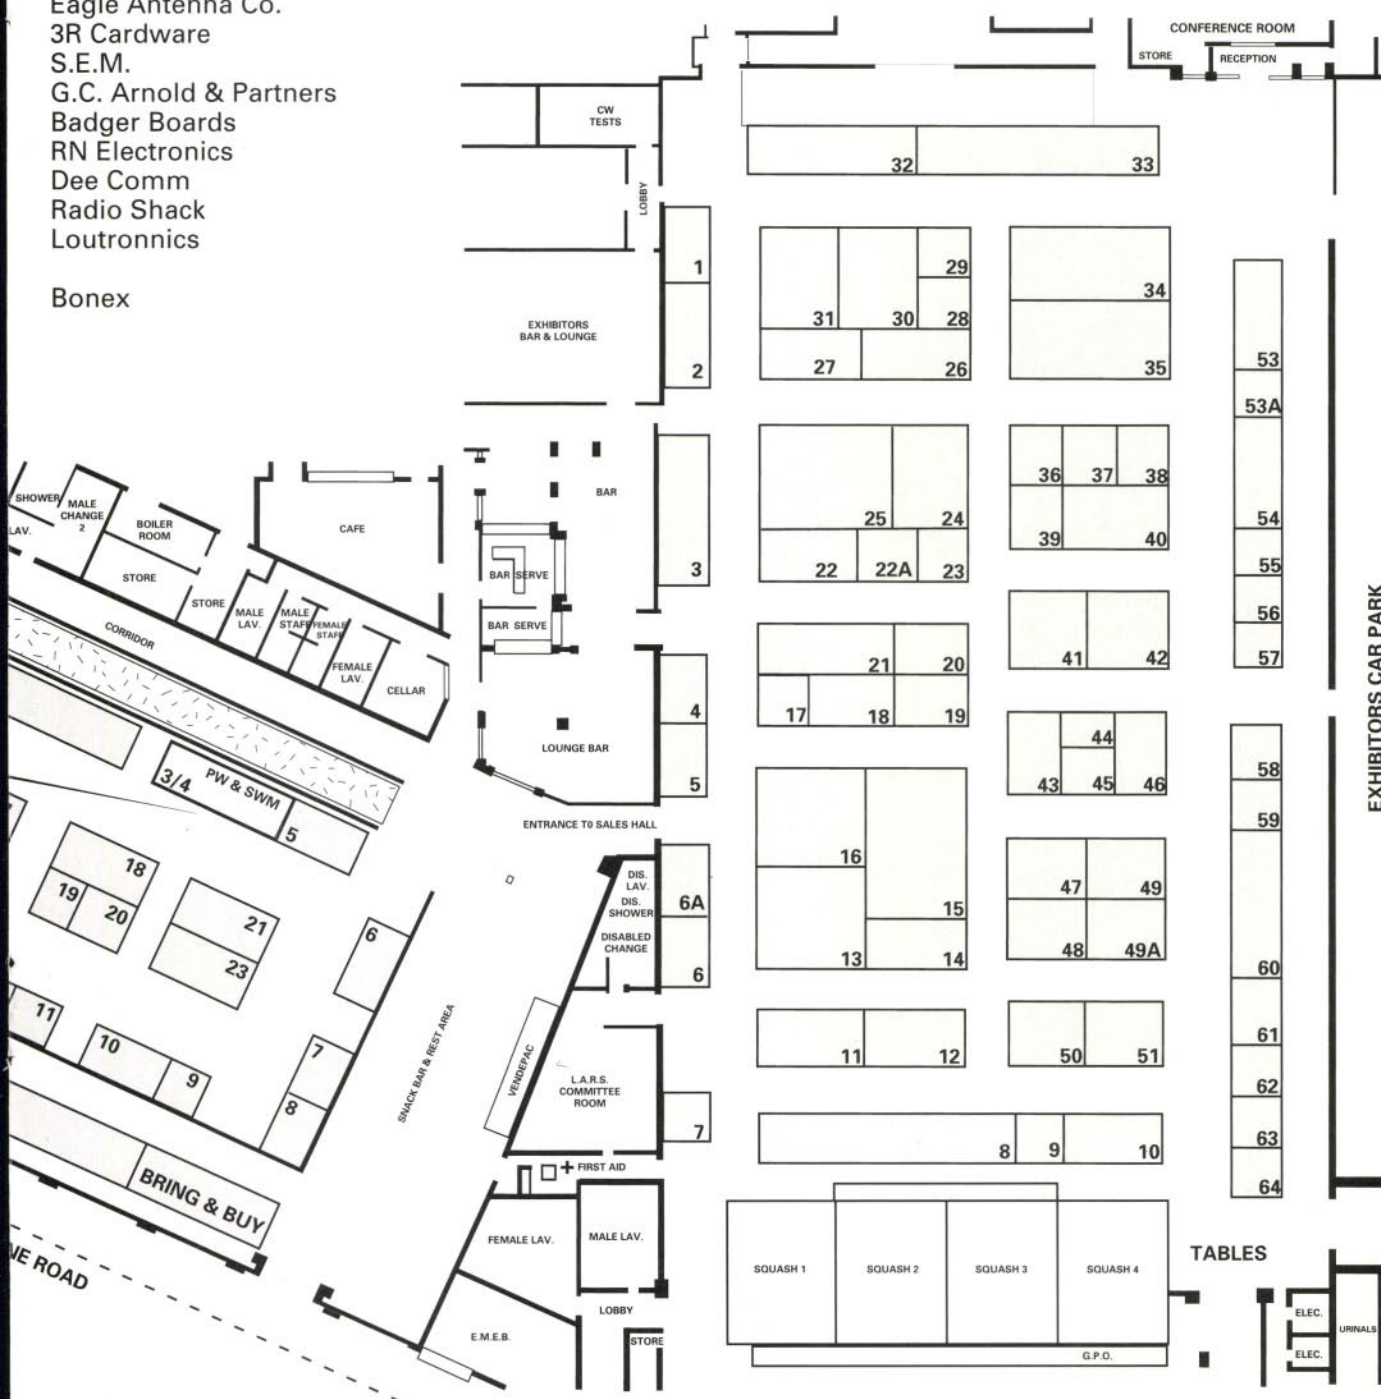

LEICESTER SHOW

October 20 & 21
Granby Halls, Leicester

short wave ^{practical} wireless
magazine

BUY YOUR COPY OF THE
NEW AND UPDATED
**'OUT OF
THIN AIR'**
EVEN BETTER & BIGGER
THAN BEFORE

Exhib. Hall
STAND 3

Get Your Copy of
**'THE TOP SECRET
INTERNATIONAL
CONFIDENTIAL
FREQUENCY LIST'**
First Edition
Available at
the Show

**BITS & BYTES
& DECODE
CLINIC**
Mike Richards
G4WNC
On hand to
answer all your
questions

**SPECIAL SHOW
SUBSCRIPTION OFFER**



**Free Mug with every
Practical Wireless
Subscription**

**DISCOUNTED
& DAMAGED
BOOKS**

A wide selection
of radio related
books at reduced
prices



Arrowsmith Court, Station Approach, Broadstone, Dorset BH18 8PW
Telephone: (01202) 659910 Facsimile: (01202) 659950

continued from page 40

Table 1

St Brandon DXpedition

1967	Don Miller, Bill Rindone and Larry Page
1968	VQ8CDB
1969/70	VQ8CFB
1970	3B7DA
1980	3B8CD/3B7 & 3B8DO/3B7
1981	3B7CF
1991	3B8CF/3B7

Station Set-Up

Jacky is a meteorological technician employed by the Mauritius Meteorology Department to service the satellite installations dotted around the dependencies of Mauritius. It was after a period of this servicing work that he returned to St Brandon (Raphael Island) to set-up the station he was to operate under the call sign 3B8CF/3B7.

The operation commenced on September 6 1991 and lasted until October 9 1991. During this period, Jacky worked over 20,000 QSOs on s.s.b., c.w. and RTTY modes. Frequencies used ranged from 3.5 to 28MHz and included the WARC bands.

The DXpedition was the first one to use WARC and RTTY from this location. Jacky enthusiastically admits to having had a lot of

fun during the period, but his sleep pattern was severely disturbed!

The schedule he tried to maintain was basically designed to enable as many amateurs, world-wide as possible, to benefit from the rare call sign.

Station equipment included a Kenwood TS-440S with an FD4 dipole (Windom) and for RTTY a Tono 7000 computer system.

Rare Callsigns

It had been 22 years since Jackie's first operation from the St Brandon group, under the call sign VQ8CFB, which took place between September 1969 and May 1970. Since 1967, there have been six DXpeditions from the group. These are as shown in **Table 1**.

I am sure that many of the amateurs who read this article will join with me in thanking Jacky for his enthusiasm and hard work in activating the rare callsigns in the Indian Ocean around his beloved Mauritius. Like me, I've no doubt they wish him and his family the

very best of luck and goodwill for the future.

Mountains of Mail

For those unsure as to how to QSL for QSOs with Jacky, please send direct a self-addressed envelope, with sufficient return postage, (preferably dollar bills, greenbacks) to: **Jacky Mandary, 6 Shastri Road, Candos, Quatre Bornes, Mauritius, Indian Ocean.**

Having seen the mountains of mail he normally receives during my last visit in 1986, I suggest you please spare a thought and make his life easier. He too is a family man and likes to spend some time with his! By following the correct QSL procedure, cards can be despatched so much faster.

For those interested in further reading about this historically fascinating area: *'Limuria' the lesser dependencies of Mauritius*, by Robert Scott (Oxford, University Press) ISBN 0837180589, will serve to complete one's studies. Although it is possible to obtain the book prices at approximately £30, a good reference library should be able to trace a copy in stock.

PW

Off The Shelf & On The Air


Rob Mannion G3XFD looks at some books available from the PW Book Service which can help you on the air, get a good antenna and chase that DX!

In line with our special articles on DX this month and knowing that PW readers enjoy a good 'browse' I've looked at some interesting books. The books I've selected are aimed at giving you operating information, DX details and antenna ideas.

Cubical Quad Antennas (3rd Edition)

By William Orr W6SAI and Stuart Cowan W2LX


This ever popular book is now in its 3rd edition and provides an up-date on all you need to know on cubical quad antennas. In my opinion this book is 'the' standard reference source dealing with one of the most suitable (for home-brewing anyway!) directional antenna systems for h.f. Thoroughly recommended. 112 pages. £7.50.

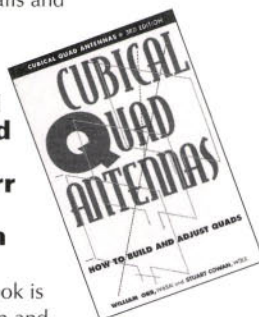

The Complete DX'er


By Bob Locher W9KNI

This is an unusual book to say the least! Although it sets out to be a 'handbook' or manual, in effect it's written almost completely in a narrative style. Because of the 'chatty' narrative approach (it's almost as though you're looking over the author's shoulder as he's writing!) the reader forgets it's a text book. Interesting reading and very helpful. Providing an illuminating view of amateur radio from the American perspective, anyone reading this book (it's almost like a printed 'documentary') will pick up a host of tips on DX working and have an enjoyable read. Unusual read, packed with tips and anecdotes, ideal informal introduction. 204 pages. £7.95.

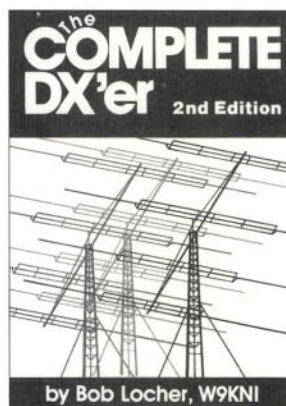

The ARRL Operating Manual

As its name suggests, this book is a manual. But in fact, it's more than just a manual as it also provides a great deal of information for anyone starting off in the hobby. It may be American orientated, but any operator or listener will find the information useful and I personally find it a good quality and comprehensive reference source (You'll find the American 'county' list useful if you're like me and find their 'counties' puzzling!). A very unusual (but helpful) feature is the printing of the various awards/certificates in full colour. Recommended. Approx. 1000 pages. £12.95.

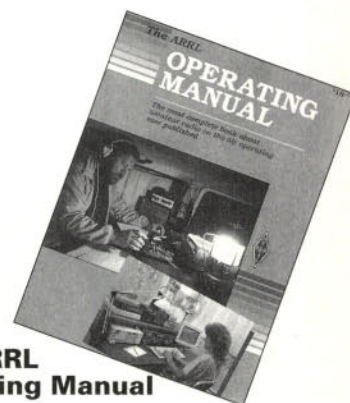

Tex's Treats

The Yaesu FT-10R

'Tex' Swann G1TEX, PW's multipurpose v.h.f./u.h.f. operator takes a holiday with a new handheld.

Many readers think that, because we work for Practical

Wireless we spend each and every day 'playing' with all the most modern up-to-date radios and radio related toys. Nothing could be farther from the truth! It's many months since I last had my hands on modern rig (other than for testing or photography). So imagine my delight at being asked to review the new FT-10R handheld transceiver from Yaesu.

Two To Play

My pleasure was even greater when I discovered that I was to have two of them. And have them to play with over my holiday period!

I come from Cumberland (now known as Cumbria or more usually as The Lake District) and I planned on heading home and doing some walking.

With walking in mind, I didn't want a difficult-to-use, or heavy hand-held rig. Gravity has a great effect on me, and I didn't want any more load than necessary!

With each radio weighing in at about 325g both were more than acceptable as luggage even for me.

Both versions of the rig are, with the exception of the keypad, identical. So I'll mention differences as they have significance and describe the 16-key pad version.

Comfortable To Use

The FT-10R is a small hand-held that fits neatly in the hand. It's a bulky looking set that feels comfortable to use one-handed. All the 29 options (26 with only the six-key pad version) may be activated by pressing (and holding for one second) the rotary selector switch.

The extra options available on either the keypad or menu (or both) are concerned with tone squelch and messaging, the paging mode and the digital voice recorder mode.

Record Audio

The Yaesu FT-10R can be set up to record up to 20 seconds of audio from an incoming call. So you could talk with your friends and still

listen out for your callsign, knowing that you can break off the conversation at a convenient time.

No longer will you have to demand quiet so that you can hear the rest of the call after your own callsign. Combine this recording with tone paging and you could even check on calls after being away from the rig.

Oh yes! You can also record up to 20 seconds of sounds to be replayed over air, or via the internal speaker. If you section the time available into two segments, one segment may be used to get the rig to answer automatically by transmitting the recorded sounds, on being paged.

You can even make your set respond with a perfect Morse identification of your callsign. Merely set the **CWID** on and set up a series of up to six alphanumeric characters as the callsign.

Selective Calling

A facility that is being fitted to many new hand-held transceivers is the use dual-tone multi-frequency (DTMF) for selective calling of others on the same frequency. You may use up to nine different three-digit codes.

The three digit codes may be either for an individual or a group of individuals. If you're using this system for individuals, then on being called by the calling station the code is automatically displayed. The DTMF system may also be combined with the paging facilities of the rigs.

The paging facilities available on this rig are excellent. Even to the level that each rig has the ability of autochecking that the other rig of a pair is still within range and contactable!

Every 25 seconds (settable) the rig will transmit a short burst with a Digital Code Squelch (DCS). These tones activates the second rig to answerback on receipt. Of course, both rigs must be on the same frequency and be using the same DCS tones!

System Similar

The DCS system is similar to continuous tone coded sub-audible squelch (CTCSS) and the sets can use this method of squelch. If you don't know which CTCSS tones are being used you can always get the set to scan the incoming signal and display for you the tones it finds in the audio.

As well as this rather clever scanning technique, the FT-10R has a multiplicity of received frequency scanning modes. These various scanning modes are becoming almost obligatory on a hand-held whatever the cost or manufacturer.

Scanning a range of frequencies may be done by one of several methods. You can set



upper and lower frequency limits, scan the whole band, or scan a series of memorised frequencies. The set will pause for a set time or wait until the carrier drops before resuming scanning.

Up to 99 memories are available (on the six-key version, only one bank of 28 is available) with two special ones labelled **PL** and **PU**. These two special memories are used for the scanning lower and upper limits, when scanning a reduced range of frequencies.

Each of the available memories may be named. When named, a four character alphanumeric 'tag' can be assigned to each memory location.

The name given to the memory then appears in the window instead of the frequency. So you could give each working frequency a channel number and identity.

Memories may be locked out of a scan, or even hidden from display. When using only memories for transmission and reception, and if you have named each memory, then only the assigned name and the memory number is shown on the display.

It couldn't be simpler for an operator. But more of this later.



Close up view of the SMA type antenna base socket, and the base of the antenna itself on the Yaesu FT-10R (see text for comments).

What Can It Do?

Many of the problems about reviewing modern hand-helds is that the list of what-it-can-do are becoming extremely long and complex. It's often far easier to say what it **won't** do!

So with what it won't do in mind I don't think it can make the tea first thing in the morning. (Or at least I haven't managed to find that in the handbook yet!).

Almost all of the functions of the FT-10R are activated by pressing the rotary knob on the top panel for about one second. After a beep, this knob is used to select the one of 29 (26 on the six-key version) functions.

Another short press shows the present state of the function or takes you further into other menus. Pressing the p.t.t. returns you to normal operation.

Various Repeaters

I took the transceivers with me when I travelled to Cumberland and used them into various repeaters on the way. The 2.5W of r.f. output managed reasonable well from its own antenna (my son was driving so there were no safety considerations (at least not from the radio point of view!)).

And it was now that I found my first problem. The antenna is not fitted with (what seems to have become the standard) a BNC plug and socket. It's fitted with an SMA style plug and socket so I was unable to put the rig onto an external antenna for evaluation.

As I was unable to use a bigger antenna, I have to say that it performed at least as well as

I would expect from within the car. But I suggest that you look after your antenna, you cannot easily drop into your local radio shop and pick up a replacement.

With its two battery saving systems in effect the 6V 650mAh battery packs were in use throughout the day on the way. In several repeater areas on the way up I enjoyed periods of conversation.

All the QSOs were using high power (2.5W) and the FT-10Rs were on full receive all day. So then, you can perhaps imagine my surprise the following morning, after leaving it on all night, to find sufficient power in the battery to monitor and fire up the local repeater several times.

'Local' Repeater

By the way, up in Cumbria My 'local' repeater was GB3GD on Snaefell on the Isle Of Man some 100 or more kilometres distant! Mind you I did have to walk into the open grounds of a school's football pitch to get a Q4 signal into the box.

I have to say at this point that the reports of the audio on transmission were all complementary. I also found throughout the day, under changing level of traffic noise, that the audio from the internal speaker belied its tiny size.

Walking in the open hills behind the town about 20 kilometres inland from the coast, the 'GD repeater was a solid signal with no problems at all for access. So, I for one can recommend 'GD if you're walking in the western sides of the Cumbrian hills.

The FT-10R fits either hand beautifully, being small and compact with all controls accessible to a left or right-handed user. But it was in the hills that I found one other slight problem with the layout of the rig

It was when using the rig in my right hand, I found that with my fingers a little numb from the prevalent wind once or twice I inadvertently switched the rig off. The 'press-on' 'press-off' power button fell very inconveniently under the third finger of my right hand.

Cured Problem

Changing to the rig left-handed use cured the switch-off

problem. The only other criticism I have about the set is in relation to its small size and the position of the microphone.

I for one am not happy at having 2.5W of 144MHz r.f. being radiated about 50mm from my eye. On a 12V supply this could be potentially 5W of r.f. floating about close to your eyes.

There is no identified problem with this amount of r.f. energy so close to the sensitive eye. But I keep my 'overs' down to a minimum when using a rig this small and so close to my face.

The comment I've made is a problem with size of modern rigs, not just a dig at one particular one. Perhaps a solution to my worries with this otherwise ideal rig, would have been to locate the microphone closer to the bottom of the rig. There's space for it there, as the battery pack fits onto the back of the rig, not underneath as on many others.

Recharging the batteries was very easy. I had the Yaesu NC-50 rapid charger on loan that seemed to take only a couple of hours to drop from rapid to trickle charge.

Make A Clone

The FT-10R had a speciality, it can make a clone of itself. No... you don't get a never-ending supply of FT-10Rs (as you do when you buy a pair of breeding rabbits). In this case the memories and other parameters can be passed onto a second FT-10R.

The 'cloning' is the one item I said I would return to. And when used in conjunction with

Tex Swann G1TEX on the air. He has concerns on the level of r.f. output from small hand-held transceivers which are held close to the face and near the eyes in use (see text).



the simplified display (using memory retained frequencies) a whole series of virtually identical FT-10Rs could be created in a few minutes.

Imagine how much easier the 'cloning' could make organising nets for wide area RAYNET exercises. Or at the larger rallies where it's difficult to organise a variety of interlocking user nets on an already well occupied band!

Anyone taking over a set at a location would need the minimum of net information. The radio would, in effect, be the net information. Changeover of operators is now very simple and quick.

The Question

Now of course I've come to the \$64,000 question! Would I keep it or even consider buying the FT-10R?

Bearing in mind my normal lack of enthusiasm for hand-helds with lots of facilities (not always as easy to use as a couple of well placed switches or knobs) I found I actually liked the FT-10R and found it easy to use. Even without the manual.

Some of the characters on the display are a bit on the small size but I can live with that. The answer to the \$64,000 question has to be an unqualified yes!

My thanks go to Yaesu UK Ltd., Unit 2, Maple Grove Business Centre, Lawrence Road, Hounslow, Middlesex TW4 6DR for the loan of the FT-10R which is available for (starting price) £269 to £339 depending on keyboard option.

PW

After seeing a copy of the Tex Swann G1TEX review, Barry Cooper G4RKO of Yaesu UK Ltd. sent us the following comments:

I am pleased that Tex enjoyed reviewing the two versions of the FT-10R. Although not mentioned in the review, the FT-10R and its 70cm stablemate, the FT-40R (which is available for £289 to £359 depending on keyboard option), are both available with four keypad options. Each of the keypads can be fitted by the user (ie. you can upgrade!) and offer increasing functionality. Tex mentions the SMA antenna mount which was used to save space and meet the moisture resilience necessary to meet the US MIL spec. requirements. If you wish to connect an antenna fitted with a BNC socket, Yaesu provide a SMA - BNC converter as a standard accessory.

Barry Cooper G4RKO



Photograph illustrating the choice of keyboards available on the FT-10R (see text).

Manufacturer's Specifications

General

Frequency range	144.000-145.995MHz
Channel Steps	5, 10, 12.5, 15, 20, 25 and 50kHz
Repeater Shift	±600kHz (or programmable in 50kHz steps)
Emission Type	F3 (f.m)
Supply Voltage	3.5 - 12V d.c.

Current Consumption

Auto power off	150µ A
Standby (saver on)	13mA
Receive (500mW a.f.)	200mA with 9.6V supply 50mA with 9.6V but squelched)
Transmit (2.5/5W)	1.2A
Antenna	SMA based helical-wound rubber covered
Case Size (whd)	57 x 123 x 26mm (with FNB-40)
Weight	325g (approx with FNB-40 antenna and belt clip)

Receiver

Sensitivity	17.7MHz and 455kHz
Adjacent Channel Selectivity	<0.16µV (12dB SINAD)
Intermodulation	>70dB
Audio Output	>70dB 500mW into 8Ω with 9.6V 10% t.h.d.)

Transmitter

Power Output	5, 2.5 and 1W and 100mW (with 9.6V supply) 2.5, 2.5, 1W, and 100mW (with 6V supply)
Frequency Stability	±10p.p.m
Modulation	±5kHz (variable reactance) (May be set to ± 2.5kHz by user)
Noise (f.m.)	-40dB (@1kHz)
Spurious emissions	>60dB below the carrier
Transmit distortion	<5% (@ 1kHz and ±3kHz deviation)
Microphone	2kΩ condenser type.
CTCSS Tones	39 tones in the range 67 to 250.3Hz
DTMF Tones	697, 770, 852 or 941Hz
(paired with)	1209, 1336, 1447 or 1633Hz

C.M.HOWES COMMUNICATIONS

Mail Order to: Eydon, Daventry,
Northants. NN11 3PT
☎ 01327 260178



GREAT PROJECTS TO BUILD!

CLEAN UP YOUR RECEPTION with this DUAL BANDWIDTH AF FILTER for £29.80!

- Reduce noise and interference! • Sharp SSB/Speech filter with faster roll-off than IF crystal filters! • 300Hz bandwidth CW filter • Printed and punched front panel • All aluminium case
 - Simply connects between radio and external 'speaker or 'phones • Suits all general coverage receivers and transceivers • ASL5 Kit plus HA50R hardware: £29.80 (plus P&P).
- Read the review in the June issue of RadCom!



Multi-Band SSB/CW RECEIVER KIT

The DXR20 covers 20, 40 & 80M bands plus any other HF frequency with optional plug-in modules. The photo shows the receiver built with DXR20 and DCS2 ("S meter") kits and HA20R hardware pack (case etc.). Excellent performance and compatible with many of our transmitter and accessory kits. Optional bands include 160, 30, 15 & 10 Meters.

Reviewed in the May issue of RadCom – "...dependable results, fine design..."

DXR20 electronics kit: £39.90. HA20R hardware pack: £28.90

PROJECTS FOR EVERYONE WITH HOWES KITS!

Please send an SAE for a catalogue/data sheet or give us a ring to discuss the details of the kits and optional hardware packs. Kits are also available as assembled and tested modules at extra cost. Not all kits are listed!

ACTIVE ANTENNA KITS

AA2	150kHz to 30MHz	£8.90
AA4	25 to 1300MHz Compact	£19.90
AB18	High Performance VHF Airband	£18.80
SPA4	Scanner Pre-amp, 4 to 1300MHz	£15.90

RECEIVER KITS

MW1	Medium Wave + 160M inc. H/W	£29.90
DcRx	Single band 20, 40 or 80M	£16.90
DXR10	10, 12 & 15M SSB/CW	£27.50
TRF3	5.7 to 17MHz TRF	£15.50

TRANSMITTER KITS

CTX40	40M QRP CW inc. crystal	£15.50
CTX80	80M QRP CW inc. crystal	£15.50
AT160	80 & 160M AM/DSB/CW	£39.90
MTX20	20M 10W CW inc. crystal	£29.90
HTX10	10 & 15M SSB Exciter 50mW	£49.90
HPA10	10 & 15M 10W Power Amp	£39.90

TX TYPE ATU KITS

CTU30	30W HF & 6M with balun	£39.90
CTU150	150W 1.8 to 30MHz	£49.90

ACCESSORY KITS

AP3	Auto Speech Processor	£16.80
MA4	Mic Amp with active filter	£6.20
CM2	Electret Mic with VOGAD	£13.50
CSL4	SSB & CW Filter for DcRx etc.	£10.50
DCS2	"S Meter" for DC receivers	£10.90
DFD4	Add-on Digital Readout	£49.90
DFD5	Digital Frequency Counter	£54.90
ST2	Side-tone/Practice Oscillator	£9.80
SWB30	SWR/Power indicator/load	£13.90
XM1	Crystal Calibrator LF to UHF	£16.90

HARDWARE PACKS

Hardware packs contain custom made case, knobs, nuts and bolts etc. for the projects. There is not enough space to list them all here, but we have hardware to build transceivers, receivers and for most accessory kits. Please enquire for details.



Top Value SWL ATU

The HOWES CTU8 SWL ATU covers medium and shortwave bands (500kHz to 30MHz). Increases wanted signals by providing impedance matching, and at the same time reduces spurious signals and interference with "front end" selectivity for the receiver. Kit contains case and all parts. Top value general coverage receiving Antenna Tuning Unit.

Reviewed in December Shortwave Magazine – "Recommended for all s.w.l.s"

Kit: £29.90 Fully assembled, ready to use: £49.90

PLEASE ADD £4.00 P&P, or £1.50 P&P for electronics only kits.

HOWES KITS contain good quality printed circuit boards with screen printed parts locations, full, clear instructions and all board mounted components. Sales, constructional and technical advice are available by phone during office hours. Please send an SAE for our free catalogue and specific product data sheets. Delivery is normally within seven days.

73 from Dave G4KQH, Technical Manager.

"How on earth do I get the cat system working with my radio?"



For years the subject of CAT interfacing for most popular Transceivers and Receivers has been somewhat of a nightmare for most except for those "in the know". At Siskin we've tried to come up with a solution that will make CAT interfacing painless and fun, it's aptly named the Siskin Multi-CAT. One simple, robust, stylish, compact unit that will work with most Kenwood, Icom and Yaesu Transceivers and Receivers.

Features include:

- Durable Die-cast compact case (stove enamelled "sheen black" professional finish)
- Supports Icom, Yaesu and Kenwood Transceivers/Receivers which are "CAT-Ready"
- Supplied with one easy to use PC software program suite that takes care of all three radio brands
- May be used with most other popular PC CAT programs such as LogEQE, Turbolog etc.,
- Supplied COMPLETE with ready-made computer and transceiver cables and manual
- British Made (designed and manufactured BY Siskin Electronics on site)
- Wide range of accessory cables available from Siskin
- Backed up by Siskin's unbeatable Customer support service including Evening Help-Line

Minimum requirements are an IBM PC or compatible with EGA or VGA Graphics plus one floppy drive and one free serial (COM) port end of course a radio with a CAT socket!

Available now
£59.95
plus £4 P&P.

Siskin Electronics Ltd.
Unit 1A, Hampton Lane, Blackfield,
Nr. Southampton SO45 1NE
Tel: 01703 243400 Fax: 01703 847754




READ BARCODES FOR £29.50

HEWLETT PACKARD HP71B

As easy to use as a calculator but as powerful as a computer.

BARCODE READER

Smart wand
– Automatically recognises and decodes all major bar-code standards.

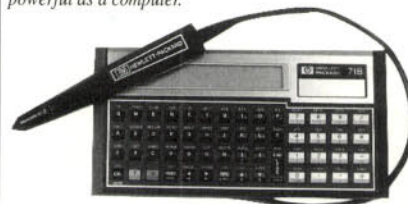

Special offer!
Buy 2 kits for
£59.00

- A powerful set of basic functions, statements, and operators – over 230 in all – many larger computers don't have a set of basic instructions this complete.
- Advanced statistics functions enabling computations on up to 15 independent variables.
- Recursive subprograms and user defined functions.
- An advanced internal file system for storing programs and data – the HP71 has continuous memory – when you turn the computer off it retains programs and data.
- A keyboard that can be easily customised for your specific application.
- HP-IL Interface pre-installed to create a system that can print, plot, store, retrieve and display information. Control or read instruments or speak to other computers, 5000 bytes/sec. Built in ROM includes 46 separate commands. Interface to HP-IL, HP-1B, RS232C, GPIO or series 80. Includes connection cables. These are second user

systems ex DHSS are fully tested and working but have no programming.
(THAT IS UP TO YOU)

HP71B.....	£29.95
Bar-code reader.....	£12.95
AC Power supply.....	£4.95
(works from batteries normally)	
Keyboard overlay.....	£1.00
(Limited quantities)	
Unknown program memory module	£3.00
(Limited quantities)	
Complete kit of HP71B, Bar-code reader and power supply	£39.50

(Prices include VAT – delivery next day £3.00 for UK)
(Currently selling in USA for > \$500)

INTERCONNECTIONS LTD

Unit 51, InShops, Wellington Centre,
Aldershot, Hants GU11 5DB
Tel: (01252) 341900 Fax: (01293) 822786

It's John Heys G3BDQ turn in the workshop this month. John talks about the facts and fiction of tuned feeders, before giving some practical advice on feedlines for antennas.

Antenn

There are many centre fed antenna designs which will allow operation on more than one band. They cannot be fed with a low impedance coaxial cable, for the feed point impedance will vary greatly over the different bands. This variation means that a tuned feeder must be used between an antenna and a balanced a.t.u. or matching unit.

A distinction must be made between the use of a 'flat' line which has a characteristic impedance which matches the antenna feed impedance and a tuned line which has 'standing waves' along its length.

A tuned feedline will have points along its length of either high r.f. current or high voltage. The actual positions being dependent upon the antenna length and the frequency being used. A balanced tuned feeder can be of any characteristic impedance and may be open wires or one of the slotted ribbon feeders with impedances of 450, 300Ω or less.

Low Losses

Balanced feeders, can give low losses, when used with a balanced antenna. They radiate very little r.f. if the spacing between the conductor wires is small in terms of wavelength. With a spacing of 150mm, the radiation loss will represent only one thousandth part of an 'S' unit at 14MHz. This means that a tuned feedline with 600mm spacing could be used on the 3.5MHz band. The actual spacing need not be constant along the length of the feeder.

The feeder in use at my QTH connects to a 27m top doublet and the feedline's 30m length is made up from an assortment of lines having different characteristic impedances. Have a look at Fig. 1 and you'll see what I mean. The set-up works perfectly from 29 to 3.5MHz

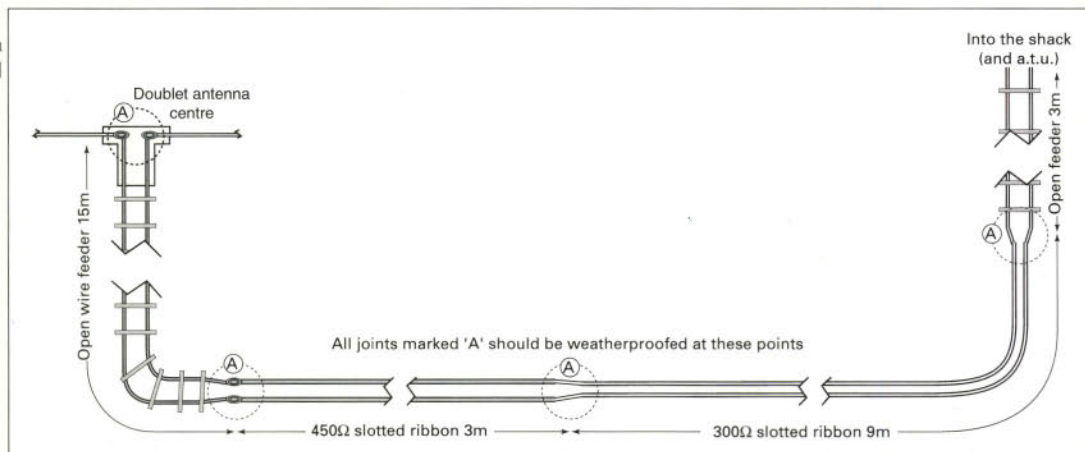


Fig. 1: How John G3BDQ, used different types of feeder for his Doublet Antenna.

and shows little loss.

A balanced open wire feeder system will have an attenuation factor no more than 0.1dB per 30m of length. Losses in the 300 and 450Ω type of slotted line

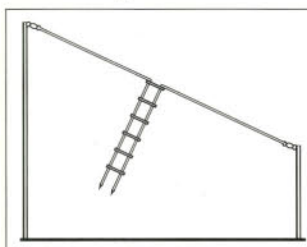


Fig. 2a: Feeder imbalance caused by a sloping antenna (one side nearer ground).

with a polyethylene dielectric will be greater (but they should still be less than 1dB per 30m at 14MHz).

A doublet antenna is no more than an open wire transmission

line, with part of its wires pulled away at right angles at the top. There will be hardly any radiation from the parallel wires in the feeder but the two equal lengths at the top, will carry in phase r.f. currents and will radiate.

The actual lengths of the doublet wires do not matter providing the top is at least $\lambda/2$ long at the lowest operating frequency. A $\lambda/4$ length top can be used, but there will be some drop in efficiency. Nevertheless, such a short doublet can still give good results.

Balance Required

A balance system is required when using a Doublet antenna and feeder system. Both antenna wires must be electrically equal and equidistant from the ground, buildings, etc. The feeder must also fall away from

the antenna top for at least $\lambda/4$ as shown in Fig. 2.

A neon bulb may be used close to the a.t.u. as a rough guide to balance. Hold the tube against each feeder wire in turn, and judge the light output. Don't worry unduly if a perfect balance cannot be achieved.

A feedline imbalance means that there will be some feeder radiation, but this shouldn't be a problem. Severe feeder line imbalance can cause TVI. One cure to give a better balance can be to lengthen or shorten one of the doublet top wires by a few centimetres.

Practical Tips

Now to the practical tips. If you decide to use commercial feeder such as the slotted types, it will have a high wind resistance and will move in the slightest breeze. This can result in metal fatigue where the wires join the antenna.

An antenna 'T' centre piece fashioned from Perspex or similar material at the antenna centre may be used to hold the feedline firmly. Then the feeder wires can be connected to the doublet legs without the strain. Rubber sealant must be used at the feeder ends to stop moisture penetrating and causing corrosion.

I find that the wider spaced 450Ω feeder is much stronger

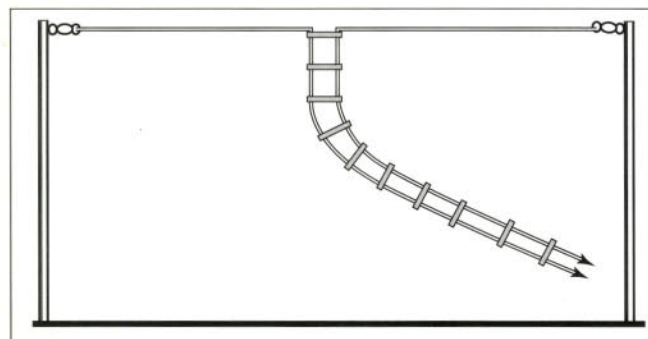


Fig. 2b: Feeder imbalance caused by the feeder not dropping vertically.

a Workshop

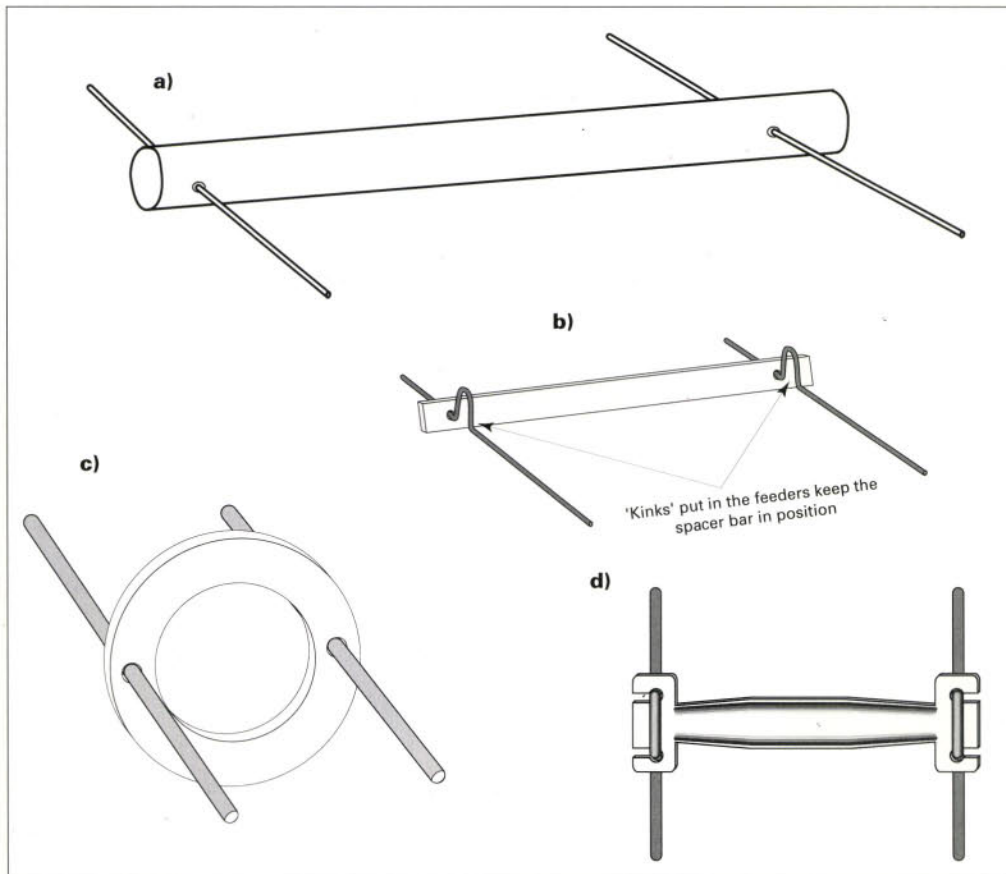


Fig. 3: Four kinds of feeder spreaders: a) Nylon or similar rod. b) Flat strips of Perspex or similar material (wire kinks to prevent slipping). c) Long leakage paths are provided by plastic ring spreaders. d) A commercially manufactured plastic spreader.

than the 300Ω variety. And it performs better in the wet.

Making Your Own

Making your own open wire line can be a bit of a 'fag', but it is well worth the effort. Although I cannot recommend using insulated stranded wire to make your own.

Several amateurs I know have had problems with insulated multi-strand wires. Frequent movement of the feeder may cause a conductor to break. These breaks are usually hidden by the insulation. Then it's very difficult to locate the fault.

My preference is for 18s.w.g. enamelled copper wire. It's lightweight, easy to handle and not prone to oxidation. Both feeder wires must be of equal length. I find it's a good idea to

use a single length of wire doubled in half, rather than trying to measure two equal lengths.

Spacers or spreaders will be needed to complete your feeder line. These should be positioned 400-450mm apart to stop the wires bending in and touching. The actual spreaders should be made of good moisture shedding plastic material with a high resistance at r.f.

The spreaders need not be all exactly the same length, for the line impedance is not critical. Nylon rod, about 7mm diameter can be obtained from Maplin and other mail order firms. Or flat spreaders can be fashioned from plastic cut-offs instead.

The circular ring form of insulator will provide an excellent long leakage path, but they are hard to find. There are

commercial spacers made from a black ultra-violet resistant material that I've found very satisfactory and easy to use.

The commercial spreaders clip into position and don't involve drilling or securing. Home-brew spacers can be held in position by blobs of a water proofglue (as hot-melt glue guns). A method not involving glue is to kink the wires below the spreaders or by tying onto the line with thin wires.

Little Used

You may have, in your scrapbox, a length of the now little used 75Ω impedance twin feeder. This will work very satisfactorily as a balanced twin feeder. The fact that its nominal impedance is low will not affect its operation as a tuned line.

The low impedance twin feeder has conductors (usually of enamelled copper) about 1mm apart. But the Polyethylene material in which they are embedded gives the feeder a remarkable puncture voltage of about 50kV. This means that it can be used safely with transmitter powers of at least 100W.

Tuned feeders must never run close to metal pipes, guttering or even brickwork. They should be spaced from such objects by at least as far as the distance between the conductor wires. Where possible, both wires must be parallel to nearby objects to maintain balance.

The feeder can be bent, but sharp bends are best avoided, especially when the angle will be sharper than 90°. A gradual curve is the ideal when changing feeder line direction.

Using a neon bulb to check balance has been mentioned. But another way to do this is to have a couple of flashlight bulbs, each connection for a few centimetres in parallel with each feeder wire.

The twin bulb technique will only work when the transmit power is 20W or more. But it's a cheaper option than having r.f. current meters in each feeder leg.

Balun Warning

Finally, I should warn against the use of step-down (usually 4:1) baluns. They should only be used when a 'flat' properly terminated transmission line is used, i.e. when the load (antenna) impedance matches the characteristic impedance of the feeder.

Unfortunately, many advertisements for the sale of a.t.u.s say that they include a balun to allow the use of 'balanced feeders'. They fail to mention that they will be unsatisfactory with tuned feeder where there may be a wide variation of impedance and reactance.

PW

Practical Wireless 1995 144MHz QRP Contest

Once again our dedicated adjudicator Neill Taylor G4HLX presents the results of PW's own 'fun' 144MHz contest, which without all his hard work we'd all miss!

The winners of the 13th annual PW 144MHz QRP Contest were the group known as 'Four Pack'. They had been runners-up in the 1992 event. 'Four Pack' joined 93 other groups and individuals who enjoyed a good day of low power v.h.f. activity on June 18. Plenty of stations managed to work some good distances, even though propagation conditions were un-exceptional.

Winning Group

The winning group comprising 'Four Pack' were **K. Johnson G8NTD**, **P. Daines G6PHJ**, **M. Ryder G0CDA** and **E. Gedvilas G8XVJ**. Operating with the callsign **G3CKR/P** from a high spot near Leek in Staffordshire (IO93 square), they contacted stations in an impressive 34 locator squares.

The group achieved their impressive result with an amazing array of antennas, comprising four 9-element and four 18-element yagis, most of them at 20m above ground! These were connected to an SSB Products LTS2 transverter, driven by a TS-930 transceiver. As well as the coveted Winners Cup, they will receive the special prize of a TH-22E 144MHz hand-held transceiver donated by **Trio-Kenwood UK Ltd.**

Second Place

Not far behind the winners, in second place were the **Hereford VHF Contest Group GW1VDF/P**, who had been the winners in 1993. In contrast to the winners G3CKR/P, they used only a single antenna, a 13-element long yagi.

The group's elevated site at around 610m a.s.l. in Radnor Forest, Powys (IO82 square) helped GW1VDF/P to achieve their total of 33



Under supervision of Wynn GW8AWT, Welsh Novice operators and 2W1BPS

(wearing headphones and XYL of Wynn!) and 2W1CSI operating at their 300m a.s.l. site in mid-Wales from the comfort of their venerable 1960s Volkswagen motor caravan.

locator squares. They will be rewarded with the runners-up prize, which this year is a Solar Panel Array donated by **Bob Keyes GW4IED** of **Key Solar Products.**

In third place is the leading single operator, **Matthew Cabban G1WPF/P**. Mathew achieved a very good score operating from Brown Clee Hill in Salop (IO82 square).

You can see the details of the other leading stations, both single and multi-operator, in the tables. One unusual feature this year is the appearance within the top ten single operators of two EI and one GI station. Perhaps there was a boost in conditions over the Irish Sea this year.

Leading Scottish Station

The leading Scottish station, the **Cockenzie & Port Seton Amateur Radio Club G0CLN/P**, operated from the Lammermuir Hills in Berwickshire. They have been presented with **The Tennamast Trophy 'In Memoriam to Frank Hall GM8BZX'** (see 'News '95' PW October) by Frank's widow **Beth Hall.**

Certificates will be sent to winners and runners-up in single and multi-operator categories, leading stations in G, GW, GM, GI and EI, and leading stations in each locator square (see list).

Congratulations To All

Congratulations to all certificate winners, and thanks to all 94 groups and individuals who entered and made the contest the success that it was.

My thanks also go to **G4IQM** and **GM0JCN/P**, who sent in checklogs. Since Martin GM0JCN/P appears to have been the only station at a good portable site in IO87 square, his presence on the band

Leading Stations

Overall Winner	Four Pack	G3CKR/P
Runners Up	Hereford VHF Contest Group	GW1VDF/P
Leading Single Operator	Matthew Cabban	G1WPF/P
Runner-up Single Operator & leading fixed station	Lee Adams	G4RKV
Leading English Station	Four Pack	G3CKR/P
Leading Welsh Station	Hereford VHF Contest Group	GW1VDF/P
Leading Scottish Station	Cockenzie & Port Seton ARC	GM0CLN/P
Leading N. Ireland Station	Peter Lowrie	GI7JYK/P
Leading Eire Station	Declan Lennon	EI9HQ/P

was appreciated by the 48 stations who worked him.

If you sent an s.a.e. in with your contest entry, you will shortly receive the full detailed results list. Anyone else who would like a copy of this should send an s.a.e. to the PW offices.

Alternatively, look on your local packet BBS for bulletins from G4HLX (use the command L< G4HLX) as I shall post the full results list on the BBS network shortly after the publication of this issue. If you have access to the Internet, you should point your Web browser at <http://www.rmplc.co.uk/eduweb/sites/ntaylor/pwqrp.html>, where you will also find the full results.

Continued on page 54

Practical Wireless 144MHz QRP Contest 1995

Pos.	Callsign	Points	Pos.	Callsign	Points
1	G3CKR/P	9486	48	G7AXE/P	918
2	GW1VDF/P	9075	49	GW1CXX/P	874
3	G1WPF/P	8608	50	GX6WWR/P	840
4	G1ORC/P	5512	51	G0FCA/P	826
5	G4RKV	5425	52	G0VYJ/P	825
6	G1WOR/P	5096	53	G4IJE	812
7	G8DDY/P	5046	54	G7OMO/P	798
8	GW1IKN/P	3564	55	G7PBT	750
9	G7OC/P	3528	56	G0CRW/P	684
10	G7AQU/P	3465	57	G6GLR	676
11	G0OVA/P	3058	58	G0RRR	675
12	G1POS/P	3040	59	G1JGE/P	658
13	G4RSE/P	2961	60	GW6JNE	649
14	G0PCX/P	2921	61	G1WYC	645
15	G4RUL/P	2622	62	G0DLR	590
16	GW8ZRE/P	2340	63	G3MPD/P	585
17	G4ZTR	2300	64	G4CW/P	561
18	G0ROO	2277	64	G4SSD	561
19	GI7JYK/P	2178	66	GX0ECR/P	547
20	G3BPK/P	2090	67	EI6ETB/P	533
21	G1YRC/P	1980	68	G2HR/P	496
22	G6OI/P	1972	68	G3NPB	496
23	EI9HQ/P	1911	70	G2FKO/P	482
24	EI6ARB/P	1760	71	G8XHW/P	481
25	G4IDF/P	1683	72	GV4AHO/P	456
26	G8NJA/P	1620	73	G3LNR	440
27	G3VEF/P	1615	74	EI/GI7UIP/P	396
28	GM0CLN/P	1552	74	G7MMQ	396
29	G6OUT/P	1530	76	G0VSA	360
30	G7SKM/P	1512	77	G0TMT	308
31	GW7LQD/P	1485	78	PE1EWR	297
32	G7NNN/P	1442	79	G8IFU	290
33	G0PJY/P	1411	80	G4STB	243
34	G4NVM/P	1368	81	GM4YEQ/P	234
35	G7SPT/P	1360	81	G7NRO/P	234
36	G7PLR/P	1320	83	GWONCN	207
37	G1WKS/P	1296	84	G7TEJ	203
38	GW4SZV/P	1281	85	G0PZR/P	180
39	G0GZI	1254	86	G7KNQ	162
40	GM0VRP/P	1200	87	G8UKZ	144
41	G6SRC/P	1088	88	G4WBC/P	115
42	G7NBP/P	1079	89	G7JTX	105
43	G7HHK/P	1072	90	G7CBT/P	104
44	G4SRS/P	1050	91	EI9HR/P	102
45	G0ADH/P	1040	92	GM0URD	36
46	GW7EVG/P	975	93	GV8AWT/P	35
47	GM7SXI/P	966	94	G0SUQ	33

0% APR MADNESS

TAKE 12, 18 OR 24 MONTHS INTEREST FREE

SUMMER PACKAGE DEALS 0% APR

WRITTEN QUOTATIONS AVAILABLE ON REQUEST, WEEKLY PRICES ARE APPROXIMATE

AOR 3000A

Plus with SDU 5000
RRP £1,898.00 deposit £189.20 24 x £71.20
ONLY £16.43 A WEEK!

AOR 8000

with Opto Scout
RRP £898.95 deposit £90.15 24 x £33.70
ONLY £7.77 A WEEK!

HAND-HELD SCANNER 0% APR MADNESS

TRIDENT TR 2400
RRP £349
All mode
1kHz-999MHz
Deposit £37
12 x £26
ONLY £6.00 A WEEK!

TRIDENT TR 1200
RRP £279
500kHz-1300MHz
with a gap
Deposit £27
12 x £21
ONLY £4.84 A WEEK!

UNIDEN BC250XLT
RRP £299
68-1300MHz
Deposit £29
12 x £22.50
ONLY £5.19 A WEEK!

YUPITERU MVT 7000
RRP £349.95
200kHz-1300MHz
Deposit £37.95
12 x £26
ONLY £6.00 A WEEK!

YUPITERU MVT 7100
RRP £419.95
All mode
1kHz-1650MHz
Deposit £41.95
12 x £31.50
ONLY £7.27 A WEEK!

AOR AR2700
RRP £299
500kHz-1300MHz
Deposit £29
12 x £22.50
ONLY £5.19 A WEEK!

AOR AR8000
RRP £449
All mode
500kHz-2036MHz
Deposit £44
12 x £33.75
ONLY £7.78 A WEEK!

BASE SCANNER RECEIVERS: 0% APR

ICOM ICR7100 DC

RRP £1449
25MHz-2000MHz
Deposit £153
24 x £54
ONLY £12.46 A WEEK!

MVT 8000

RRP £469
100kHz-1300MHz
Deposit £46
12 x £35.25
ONLY £8.13 A WEEK!

PRO 2035

RRP £349.95
Deposit £37.95
12 x £26
ONLY £6 A WEEK!

PRO 2036

RRP £349.95
Deposit £37.95
12 x £26
ONLY £6 A WEEK!

SHORTWAVE - WORLDWIDE - DX RECEIVERS

KENWOOD R5000
RRP £1059.95
500kHz-30MHz
Deposit £105
24 x £39.75
ONLY £9.17 A WEEK!

LOWE HF250
RRP £799
30kHz-30MHz
Deposit £79
18 x £40
ONLY £9.23 A WEEK!

LOWE HF150
RRP £419
30kHz-30MHz
Deposit £41
12 x £31.50
ONLY £7.27 A WEEK!

ICOM R72DC
RRP £895
100kHz-30MHz
Deposit £89.50
18 x £44.75
ONLY £10.32 A WEEK!

YAESU FRG100
RRP £559
500kHz-30MHz
Deposit £55
18 x £28
ONLY £6.46 A WEEK!

COASTAL COMMUNICATIONS

— MEETING YOUR DEMANDS!! —

19 Cambridge Road - Clacton-on-Sea - Essex CO15 3QJ

Monday - Saturday 9am - 5pm Wednesday 9am - 2pm Tel: (01255) 474292 Fax: (01255) 476524

QSL COMMUNICATIONS

UNIT 6, WORLE INDUSTRIAL CENTRE, COKER ROAD,
WORLE, WESTON-SUPER-MARE BS22 0BX
TEL: (01934) 512757 (0850) 707257 FAX: (01934) 512757

WE ARE UK APPOINTED DEALERS FOR ALL MAJOR BRANDS INCLUDING

YAESU, KENWOOD, ICOM, AOR, ALINCO.

PHONE US NOW WITH YOUR REQUIREMENTS FOR THE BEST DEAL POSSIBLE

MICROWAVE MODULES

LINEARS WITH SWITCHED PRE AMPS

MML 432-30LS 25-30W O/P OR 3W I/P...£169.95
MML 432-50S 50W O/P 10/15W I/P.....£169.95
MML 144-100S 100W O/P 10W I/P.....£179.95
MML 144-100LS 100W O/P 1 or 3W I/P.....£199.95
MML 144-30LS 30W O/P 1 OR 3W I/P.....£99.95
MML 70-100S 100W O/P 10W I/P.....£179.95
MML 50-30LS 30W O/P 1 or 3W I/P.....£99.95
MML 50-100S 100W O/P 10W I/P.....£179.95
MML 50-100LS 100W O/P 1 OR 3W I/P...£199.95

TRANSVERTERS

MMT 70-28 10MTR TO 4MTR 10W...£199.95
MMT 144-28 10MTR TO 2MTR 10W...£199.95
MMT 432-28 10MTR TO 70CM 10W...£199.95

**QSL CARDS SEND LARGE S.A.E. FOR
SAMPLES AND PRICE LIST**



TRANSCEIVERS

70CMS = £193
2MTRS = £193
4MTRS = £193
6MTRS = £193

**PART EXCHANGE WELCOME
ON NEW AND SECONDHAND
EQUIPMENT**

**EARTH RODS 4FT LONG, ADJUSTABLE BRASS FIXING
SOLID COPPER £10.99, COPPER PLATED STEEL £8.99, P&P £2.50**



**ACE MH1 HEADSET
£12.99 INC P&P**

END OF SEASON SALE

MICROSET LINEAR + PREAMP

RU70 70CMS 0.8-3W IN 15-20W OUT.....£117
RU45 70CMS 3-15W IN 45W OUT.....£159
RV45 2M 3-15W IN 45 W OUT.....£89
SR100 2M 4-25W IN 100W OUT.....£149
VUR30 2M/70CMS 1.6W IN 20/30W OUT.....£229

TOROIDAL TRANSFORMER 29AMP

PRIMARY 240V SECONDARY 2 PAIR 18V.....£39

WE ARE 1 MILE FROM JUNCTION 21, M5 AND HAVE OUR OWN LARGE CAR PARK

Continued From Page 52



A clear 'take off' for G8XHW/P, also operating from the comfort of a motor caravan!

Dry And Bright

During the contest, most parts of the UK enjoyed dry and bright weather. However, some groups who set-up portable stations on the Saturday evening found that they were doing so in the rain.

The main problem facing those who had taken to the hilltops was that well-known enemy of antenna masts...the wind. "The wind was about 40m.p.h. at times" said **GM7SX1/P** "and the boom developed a bend"! ("Can I now transmit round corners"?).

A number of other stations reported problems with the breeze, but it wasn't a universal difficulty. For example **G17JK/P** remarks "the weather was brilliant and a better day couldn't have been wished for, especially the lack of wind".

The good weather may have been a blessing for those portable on the hill tops, but not necessarily for those who stayed at home! This is shown by **G3LNR** who reports that "good weather brought out the hedge clippers and grass cutters, causing long spells of QRN".

Another comment on the effects of the weather comes from the winners, **G3CKR/P**: "thanks to the recent rain the sheep muck was the correct consistency to allow us to go home with fashionable platform shoes"! (Oh well, it's supposed to bring good luck!).

Propagation Conditions

Nothing exceptional seems to have occurred with the propagation conditions. Despite some spells of sporadic-E on the days before and after the contest, the only sign of it on the day itself was the one that got away at **GW1VDF/P**.

"When we were working **Frank PE1EWR**", **GW1VDF/P** tell us, "we had two French stations rag-chewing 'come up' on frequency. Then we were called by an **SP6!!!** We had no reply from him after working Frank, and presume he was on sporadic E".

So for this year's contest, the best word for the conditions was probably 'mediocre', which is just as **G3NPB** describes them! Nevertheless he says that the **PW** QRP Contest is "still the highlight of my year's operating. Fortunately the locals rallied round and I worked 48 Cornish stations. That must be some sort of record".

QRP Surprise


For those who are new to QRP operation on v.h.f. there's always a surprise at how far they can work. Especially on a day when there's plenty of activity from good sites around the UK, despite the mediocre conditions.

There are still surprises, even for those more experienced, "it still amazes me how far contacts can be made with QRP and a good site, three contacts over 500km, 13 over 400km" says **G1WPF/P**, this year's leading single operator.

As usual, I've been delighted to find the newcomers who have been 'bitten' by the **PW** contest 'bug', and vowing to come back for more, like **E16ETB/P** who said "this is the first time we entered, you'll hear us on next year for definite".

*Note: I hope to make an announcement very soon to further encourage keen EI entrants to the **PW** contest. Watch this space! Editor.*

Clearly a lovely day for the crew at G0PJY/P with (left to right) Mike G0ROT, Dave G7MVF, Peter G0PJY and Graham G7SUR.

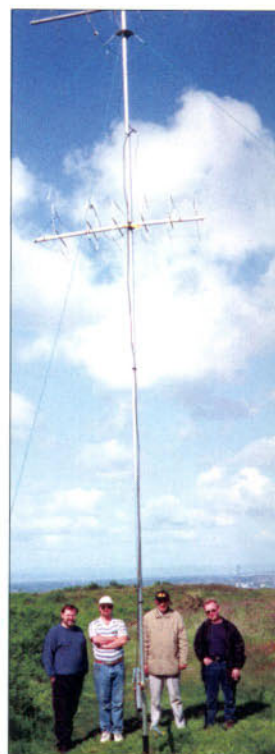

It's also pleasing to report that one feature of this contest that has remained over the years is the generally good operating practices. Commenting on this fact **GM7SX1/P** notes "how polite everyone was - it's a real pleasure to work stations like that".

The **Stroud Radio Society G4SRS/P**, had a disappointment over their plans for the day. "We were hoping to conduct the **PW** contest from Steephelm Island in the Bristol Channel but due to severe weather conditions the skipper of the boat taking us to the island refused to land us on the island and all sailings for that day were cancelled. We were bitterly disappointed, after months of preparation. An alternative site on dry land turned out to be far inferior".

Backpackers' Contest

One aspect of the contest which was different this year, was the second leg of the 'Backpackers' 144MHz contest run by the **RSGB** being scheduled for the same day. There ought to have been some synergy between the two events, since they are both suitable for small highly portable low-power stations.

However, the difficulty facing anyone who

Leading Stations using a single antenna

Pos	Name	Call sign	Antenna
2	Hereford VHF Contest Group	GW1VDF/P	13-ele Cushcraft
8	The Two Musketeers Cymraeg	GW1IKN/P	8-ele Jaybeam
9	John Rudd & Kevin Porter	G7OCJ/P	10-ele Maspro
10	Frank Carter	G7AQU/P	19-ele
11	Tony Crake & Colin Potter	G0OVA/P	19-ele DL6WU (home-brew)
12	Jon Page	G1POS/P	14-ele MET
13	South Essex ARS (SEARS)	G4RSE/P	19-ele MET
14	Erewash Valley ARS	G0PCX/P	16-ele
15	Alastair Turner & Peter Hutchinson	G4RUL/P	10-ele DL6WU (home-brew)
16	Dave Hewitt	GW8ZRE/P	7-ele ZL-special

Leading multi-operator stations

Pos	Name	Call	Score	QSO	Squ	Loc	Ant	a.s.l.(m)	TX/RX
1	Four Pack	G3CKR/P	9486	279	34	IO93AD	4x 9Y+ 4x18Y	465	LTS2+TS-930
2	Hereford VHF Contest Group	GW1VDF/P	9075	275	33	IO82JG	17+13Y	610	TR-751E
4	Oldham Radio Club	G1ORC/P	5512	212	26	IO93BJ	2x9Y	635	FT-290R
6	Worthing & District ARC	G1WOR/P	5096	196	26	IO90TV	17Y	240	IC-275
8	The Two Musketeers Cymraeg	GW1IKN/P	3564	162	22	IO81LS	8Y	420	FT-290R
9	John Rudd & Kevin Porter	G7OCJ/P	3528	147	24	IO92XA	10Y	455	FT-290R2
11	Tony Crake & Colin Potter	G0OVA/P	3058	139	22	IO91GI	19Y	295	TR-751E
13	South Essex ARS (SEARS)	G4RSE/P	2961	141	21	JO01EN	19Y	55	IC-271E
14	Erewash Valley ARS	G0PCX/P	2921	127	23	IO93IC	16Y	135	FT-726
15	Alastair Turner & Peter Hutchinson	G4RUL/P	2622	114	23	JO00EX	10Y	190	IC-251E

Leading Stations in each locator square

Square	Name	Call sign	No. entrants in square
IO62	Warren Daly & Michael Kiely	EI6ETB/P	2
IO63	Declan Lennon	EI9HQ/P	2
IO64	Ken O'Reilly	EI/GI7UIP/P	1
IO70	Poldhu Amateur Radio Club	G3MPD/P	5
IO71	Aberporth YMCA ARC	GW4SZV/P	3
IO74	Peter Lowrie	GI7JYK/P	1
IO80	Torbay Amateur Radio Society	G8NJA/P	3
IO81	The Two Musketeers Cymraeg	GW11KN/P	5
IO82	Hereford VHF Contest Group	GW1VDF/P	9
IO83	Dave Hewitt	GW8ZRE/P	6
IO84	David Andrew & Michael Dent	G6OUT/P	3
IO85	Cockenzie & Port Seton ARC	GM0CLN/P	3
IO86	Menstrie Morse Group	GM0VRP/P	2
IO90	Worthing & District ARC	G1WOR/P	4
IO91	Tony Crake & Colin Potter	G0OVA/P	6
IO92	John Rudd & Kevin Porter	G7OCI/P	9
IO93	Four Pack	G3CKR/P	7
IO94	York Radio Club	G1YRC/P	5
JO00	Alastair Turner & Peter Hutchinson	G4RUL/P	1
JO01	Lee Adams	G4RKV	14
JO02	Roy Smith	G0RRC	3
JO11	Frank Laanen	PE1EWR	1

No neighbours to worry about for G7NRO/P!



thought they might send their log into both contests was the different starting time. By the time the problem was recognised it was too late to change the start time of either event.

Fortunately the RSGB VHF Contests Committee agreed to accept logs in which the serial numbers did not start at 001. This allowed operators to use part of their logs for the day as an entry to the Backpackers' contest.

As it turned out on the day, the problems caused by the coincidence of the two contests were few. And **GI7JYK/P** summarises it well "On the whole both the *PW* and Backpackers' contests ran smoothly and sorting out the duplicates from the Backpackers' contest at the end was the only real headache. It didn't really lead to the chaos most contesters would have imagined".

Also commenting on the problems of two contests **G6OUT/P** said that "it made things rather long winded having to give a county on each contact"! One other problem was encountered by **GW8ZRE/P**, whose "hill top site was invaded by a station for the Backpackers' contest! But we managed to co-exist". Sharing a hill top with another contest station on the same band is quite a feat, and could only be done in a QRP event!

The RSGB Backpackers' contests are to be continued at the same time of year. However, I'm pleased to say that we have already co-ordinated our events for 1996.

Both the *PW* 144 MHz QRP Contest, and a leg of the RSGB 144MHz Backpackers' contest will take place on **Sunday 16 June 1996**. This time we will have the start times coinciding: **0900UTC**, the normal time for the *PW* event.

And in this leg of the Backpackers' contest there will be no county multiplier (so no need to exchange county names in addition to everything else). I am very grateful to **David Johnson G4DHF**, and the rest of the **RSGB VHF Contests Committee**, for their co-operation over this important matter.

Contest Duration

The discussions which led to the arrangements for 1996 caused me to re-consider the duration of the *PW* QRP Contest. It was set at eight hours back in the early 1980s, when the level of activity in v.h.f. contests was generally higher than today (we



It looks a 'Cold 'un' at Oldham! The hardy crew at the Oldham RC's station G1ORC/P.

received 234 entries for the 1984 event and the winners worked 470 stations).

In recent years, most operators have probably found that the end of the afternoon begins to become a little tedious as the rate of contacts falls rather low. And while I was thinking about all this, a comment came in from **G0ADH/P**.

The comment and appeal from **G0ADH/P** was for an hour to be chopped off the duration of the contest: "By the time I have taken my antenna down, packed everything into the car,

driven home, unloaded the car, and had dinner, there is very little time left of the evening to take the *XYL* out to pacify her for my not doing all the jobs which I should have done during the day"!

Accordingly, it's my intention to reduce the 1996 *PW* 144MHz QRP Contest to seven hours, **0900 - 1600UTC**, unless I receive strong opposition to the idea before February when the rules are prepared for publication.

So, if you have any views on the reduction in hours for next year let me know. Write to me at: **46 Hunters Field, Stanford in the Vale, Faringdon, Oxfordshire SN7 8LX**, or E-mail to **ntaylor@mplc.co.uk** The Backpackers' contest, by the way, will end at 1300UTC that day.

Start Planning

Next June may seem a long time off if you are reading this as the nights are drawing in for autumn, but it's never too early to start planning! You can start gathering together a group of operators, selecting the equipment you might use and antenna systems to assemble.

Drawing up a shortlist of potential portable sites can be done early, too. Then maybe you can try them out during the spring.

Look out for the contest details and rules in *PW* next year, but in the meantime note the date in your diary: **16 June 1996, 0900 - 1600UTC**.

Finally, thanks again to all who supported the contest this year, by sending in an entry or just by coming on the air on the day. Hope to hear you all again next year.

Neill G4HLX

'Thank you'

The *PW* Editorial team would like to say a very special 'Thank you' to Neill Taylor G4HLX for his hard work organising the contest. Neill has been the driving force behind the event for 13 years and I hope he'll be there for many more! Thanks Neill, and we also hope to have some encouraging news for EI and GI entrants soon.

Rob Mannion G3XFD

Leading single operator stations

Pos	Name	Call	score	QSO	Squ	Loc	Ant	a.s.l.(m)	TX/RX
3	Matthew Cabban	G1WPF/P	8608	269	32	IO82QL	2x9Y	455	IC-251E
5	Lee Adams	G4RKV	5425	175	31	JO01OI	2x9Y	35	IC-275E
7	Peter Thompson	G8DDY/P	5046	174	29	IO90JO	2x11Y	225	FT-221R
10	Frank Carter	G7AQU/P	3465	165	21	IO92AH	19Y	90	TR-9000
12	Jon Page	G1POS/P	3040	160	19	IO92CA	14Y	300	FT-480R
16	Dave Hewitt	GW8ZRE/P	2340	117	20	IO83JA	7Z	560	TR-751E
17	John Lemay	G4ZTR	2300	100	23	JO01KW	2x9Y	55	TS-850 + transverter
19	Peter Lowrie	GI7JYK/P	2178	99	22	IO74DT	9Y	150	FT-290R
23	Declan Lennon	EI9HQ/P	1911	91	21	IO63WC	2x13Y	?	FT-290R
24	John O'Sullivan	EI6ARB/P	1760	80	22	IO63VF	8Y	440	FT-290R

In the second and final part of the PW Daventry project, designer Dave Howes G4KQH describes the constructional and assembly stages of the receiver.

The PW Daventry 7MHz Receiver Part 2



The Daventry's p.c.b. assembly is quite straightforward in concept. There's no coil winding or any special procedures, other than to observe static handling precautions with the dual-gate MOSFETS (BF981).

However, there are quite a lot of parts to fit and solder! So, it's important that your soldering equipment is in good working order and that you have good quality solder for the job.

You'll need a soldering iron with a fine pointed tip. It also needs a fair amount of power behind it to make good joints on the ground plane connections on the top of the board.

You can buy the p.c.b. for this project ready made, or a complete kit of parts (see addresses at the end of the article). So I won't go into details of how to make a p.c.b. here. However, you can make your own from the drawings if you prefer.

The Assembly

Once you have your p.c.b. and all the parts for the project, I suggest you start the assembly of the p.c.b. module by fitting the terminal pins first. This is followed by the resistors, diodes, inductors, capacitors, crystal filter, crystal and then finally the rest of the semiconductors.

It's **very important** to keep all component leads as short as possible. And it's also important, where there's provision for soldering


a component lead to both a track under the board and the ground plane on top, that the connections are **soldered on both sides** of the p.c.b.

The inductors come before the capacitors in the

assembly list because it's a little tricky to solder some inductor's screening cans to the ground plane once the capacitors are in place. These cans can be hard to solder properly at the best of times, and it's worth scraping the can with a sharp knife on the area you are going to solder.

Some decoupling capacitors in the i.f. amplifier section of the circuit have their earth lead soldered directly to the ground plane only. These components have a p.c.b. hole for only

Continued on page 58 ►

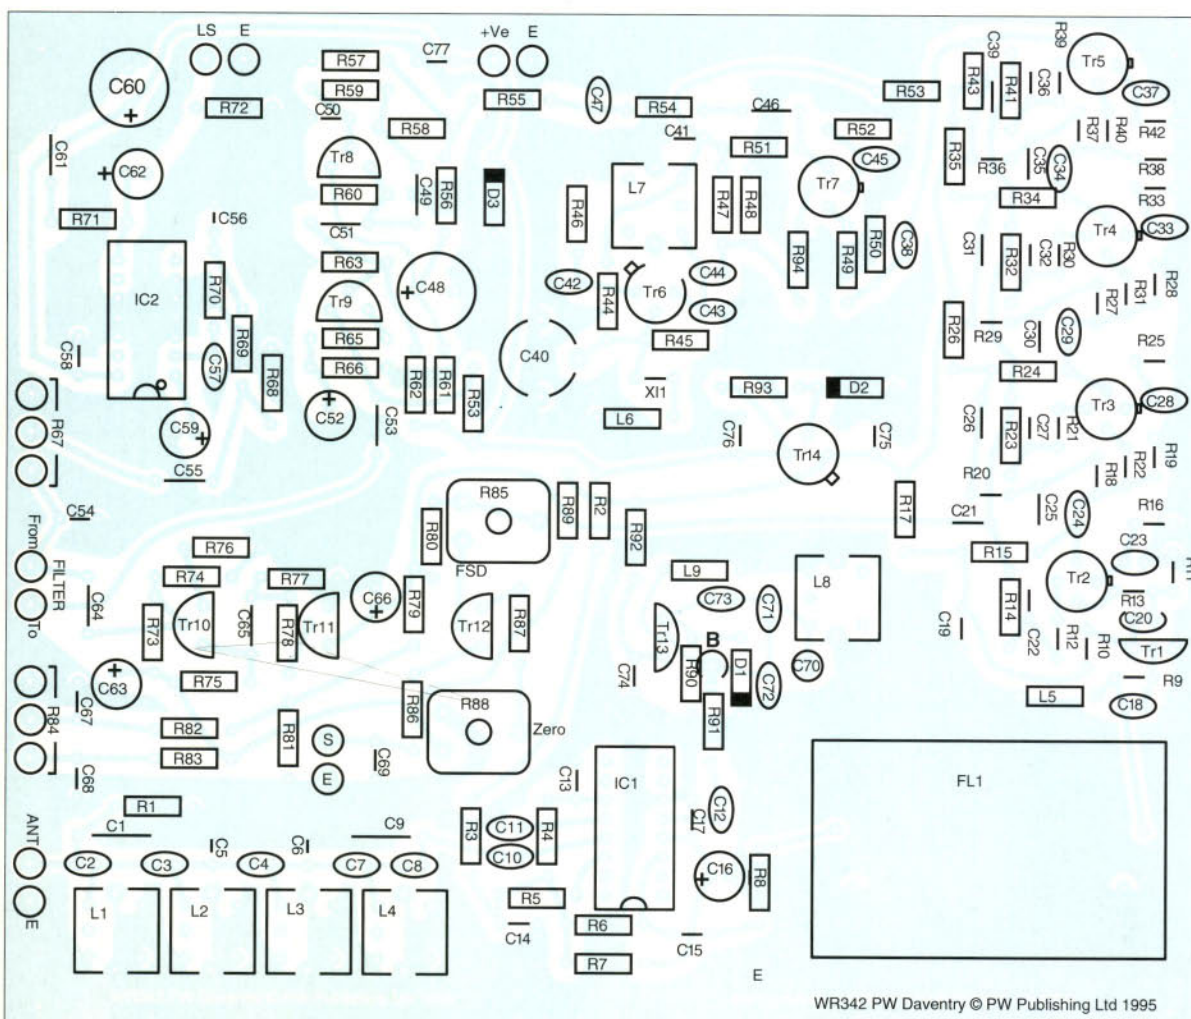

Editorial note:

Errors & Updates on Part 1 of the PW Daventry project (published in the October issue).

Please refer to page 30, Figs. 3 and 5.

In Fig. 3, XL2 is in fact XL1. In Fig. 5, C64 should be 100nF.

Our apologies for these errors. Editor.

Fig. 3: Component overlay diagram for the Daventry receiver p.c.b.

WR342 PW Daventry © PW Publishing Ltd 1995

ALTRON TOWERS AND MASTS QUALITY AT A GOOD PRICE

- ★ Telescopic, tiltover
- ★ Fixed
- ★ Static, mobile
- ★ 4.5m and 3m section modules for low retracted height
- ★ Fully galvanised to BS729

Over 50 models available from 3m – 30m telescopic and 60m fixed including the popular and proven SM30 and CM35 masts. Design windloads based on CP3 CHAP V pt 11 1972 (38 m/s minimum 85 mph) and BS8100 1986.

Used by such professional bodies as: BT; Home Office; DTI; British Aerospace; British Gas; the Police; Hutchinson Telecommunication; Motorola and Marconi.

Also available are the highly anti-corrosive, precision manufactured strong, portable ALI masts and towers.

AQ6-20 'Space Saver'

- compact 4 bander with 2, 3 or 4 elements. 6, 10, 15 & 20m.
- Unique fully sealed coils • Hi 'Q' close coupled capacity hat loaded yagi with optimised performance
- Ideal for small spaces • Full specification sheet available.
- 2 Ele £161 • 3 Ele £236
- 4 Ele £310

Send large SAE for full details or phone for quote.
UNIT 1, PLOT 27, CROSS HANDS
BUSINESS PARK, CROSS HANDS
DYFED, S. WALES, SA14 6RE
Tel. 01269 831431 Fax 01269 845348

**ALTRON
COMMUNICATIONS
EQUIPMENT LTD**



DATONG
ELECTRONICS LIMITED


Clayton Wood Close
West Park
Leeds LS16 6OE
Tel: 0113 274 4822
Fax: 0133 274 2872

For products you can rely upon to give amazing results

For information on **Active Antennas, RF Amplifiers, Converters, Audio Filters, the Morse Tutor and Speech Processors** send or telephone for a free catalogue and selective data sheets as required.

All our products are designed and made in Britain.

Orders can be despatched within 48 hours subject to availability.

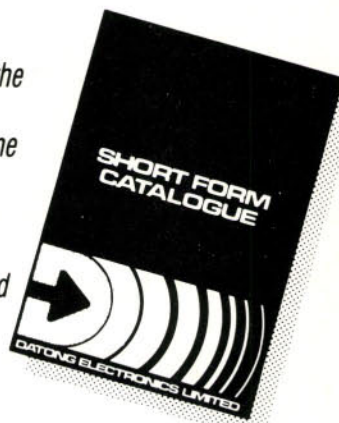

— VISA AND ACCESS WELCOME —



Communications Centre (Photo Acoustics Ltd.)

TWO-WAY RADIO • AMATEUR RADIO • AUDIO VISUAL • SALES & SERVICE

58 High Street, Newport Pagnell, Bucks MK16 8AQ. Tel: (01908) 610625 FAX: (01908) 216373

(email:100304.71@compuserve.com)



This is it. The SG-2000 HF-SSB. With 644 ITU and ham frequencies – including SITOP text channels – permanently etched into memory. Plus 100 user programmable frequencies and easy Weather-fax connections. A real power-house that produces a full 150 watts. The SG-2000 HF-SSB. Afloat or ashore, on the job or on the road, this is what you want. Call us. H REMOTE HEAD FACILITY H RS-232 CONTROLLABLE

TRADE ENQUIRIES WELCOME
on SG-2000 and SG-230

£1799.00

Carriage: £15.00

SG-230 Smartuner®

Antenna Coupler **£399.00**

SSB, AM, CW & DATA
You can't buy a smarter tuner than this. An automatic antenna coupler so intelligent it precisely tunes any length antenna – 8 to 80ft – in the HF band. The Smartuner® automatically evaluates and switches 64 input and 32 output capacitance combinations, plus 256 inductance combinations in a "pi" network. The amazing result is over a half-million different ways to ensure a perfect match for your transceiver. And the most intelligent feature of all is that the Smartuner® remembers the chosen frequency and tuning values, and will automatically reselect those values – in less than 10ms, each time you transmit on that frequency.

The SG-230 Smartuner®.

Buy Smart.



SMARTUNER®
INSIDE

SECOND-HAND EQUIPMENT

Kenwood TS-440SAT C/W matching PS-50 PSU & MC-80A desk mic. This unit is in excellent condition and comes with a 3 month warranty£995.00
Icom IC-251E 2m Multimode Base Station. (Excellent radio)£499.00
Daiwa LA2035 30w 2m linear£51.63
Daiwa PS-30XII 30 amp power supply, variable voltage. (As New)£119.00
Kenwood TH-75E 2m/70cms dualband handheld C/W Nicad pack, aerial, charger & manual. (3 months warranty)£275.00
Icom IC-751 160-10m, 10W HF transceiver, general coverage receive. This unit is 12V operated and is in good condition. (3 months warranty)£629.00
Yaesu FT-209R 2m handheld complete. (3 months warranty)£149.00
PK-232 Terminal unit£195.00
Yaesu FT-290RI 2m multimode c/w mobile bracket, box and manual£249.00
Icom IC-02E 2m handheld C/W nicad, charger, aerial, manual & box. (3 months warranty)£170.00
Drae SSTV receiver Receive SSTV pictures from around the world£75.00
Kenwood TH-201A 2m 25W mobile transceiver C/W mic & mobile bracket & speaker. (3 months warranty)£185.00
Kenwood TM-255E SUPERB 2m multimode, 40w output, this unit is complete and as NEW£799.00
Kenwood TS-50S HF mobile transceiver, general coverage receive. This unit is complete and in mint condition£725.00
AMP Supply 1.5Kw 160-10 metre HF linear. This is as NEW and has a full 12 months warranty£1100.00

AUTHORISED AGENTS FOR KENWOOD, ICOM, YAESU & ALINCO. FULL SERVICE FACILITIES AVAILABLE

SPEND UP TO £1,200 INSTANTLY WITH A PHOTO ACOUSTICS LTD. CREDIT CHARGE CARD

PART EXCHANGE WELCOME, ASK FOR KERRY G6IZF OR ANDY G4YOW

RETAIL SHOWROOM OPEN MONDAY - FRIDAY 9.30 - 5.30, Saturday 9.30 - 4.30

Goods normally despatched within 24 hours. Please allow 7 banking days for cheque clearance. Prices correct at time of going to press - E&OE



► Continued from page 56
one lead. Make especially certain that these capacitor's leads are as short as possible.

Bench Testing

Once the p.c.b. module has been assembled and checked, you can start the bench testing. This is a good tip...because it's much easier to sort out any constructional errors before the board is fitted into the case.

First, carry out a basic mechanical alignment of the preset controls and coils to get them to roughly the right settings. The positions are shown in **Table 1**.

Please note, you must use the correct insulated trimming tool for the variable inductors. This is essential. **Do not** attempt to turn them with anything else, or you may well end up having to replace them with new ones – this is not that easy to do, and you will still have to buy the correct tool!

Next wire the **IF** and **AF** gain control potentiometers to the p.c.b. with short leads. Then link the terminal pins for the optional filter together, and connect a loudspeaker.

If you now connect up a power supply – making certain it's connected the right way round, then the receiver board should come to life. On adjusting the **AF** gain control, R67, you should be able to hear some hiss from the loudspeaker.

The b.f.o. coil, L7, now needs to be adjusted for maximum oscillation. An easy way

to do this is to listen for the oscillation a few kHz below 10.7MHz with another receiver. Alternatively, you can use a small pick-up loop near the stage to drive an oscilloscope or other sensitive detector.

With the b.f.o. output maximised, now place a finger on each of the i.f. transistors (Trs 2, 3, 4, 5 and 6) to inject some spurious signals into the i.f. strip. (You should be able to hear some broadcast signals breaking through when you do this).

The nearer the input stage you place your finger (lower number transistor) the stronger the breakthrough should be. This is a crude test to indicate that the a.f. and i.f. stages are functional.

If all seems well, remove the power and connect up the S-meter. Reconnect the power, turn R84 to the end of its travel that gives the lowest reading on the meter, then adjust R88 to zero the meter.

The response to turning R84 is very slow (it's affected by the a.g.c. recovery delay). So wait a few seconds after adjusting it for the meter to move.

When the meter is zeroed, turn R84 to the other end of its travel and adjust R85 for full scale deflection on the meter. The S-meter is now nominally aligned.

If everything seems satisfactory so far, then listen for the v.f.o. signal with another receiver, or other detector. This will probably be oscillating somewhere around 18 to 18.5MHz with L8 core set as recommended and without


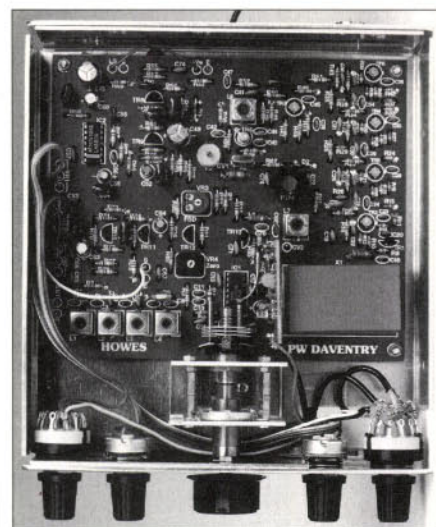


Fig. 1: Inside view of the completed prototype PW Daventry showing main component lay-out and controls. (see text).

a tuning capacitor (C70) being connected.

You could now try connecting an antenna to the antenna terminals and see if you can hear any signals. To do this, you'll need a decent antenna at this point because the r.f. input filter is probably not 'on the nose' yet.

Putting your finger on C70, C72 or on the L8/C73 junctions will alter the v.f.o. frequency a little. It may even enable you to resolve a signal if you are very lucky!

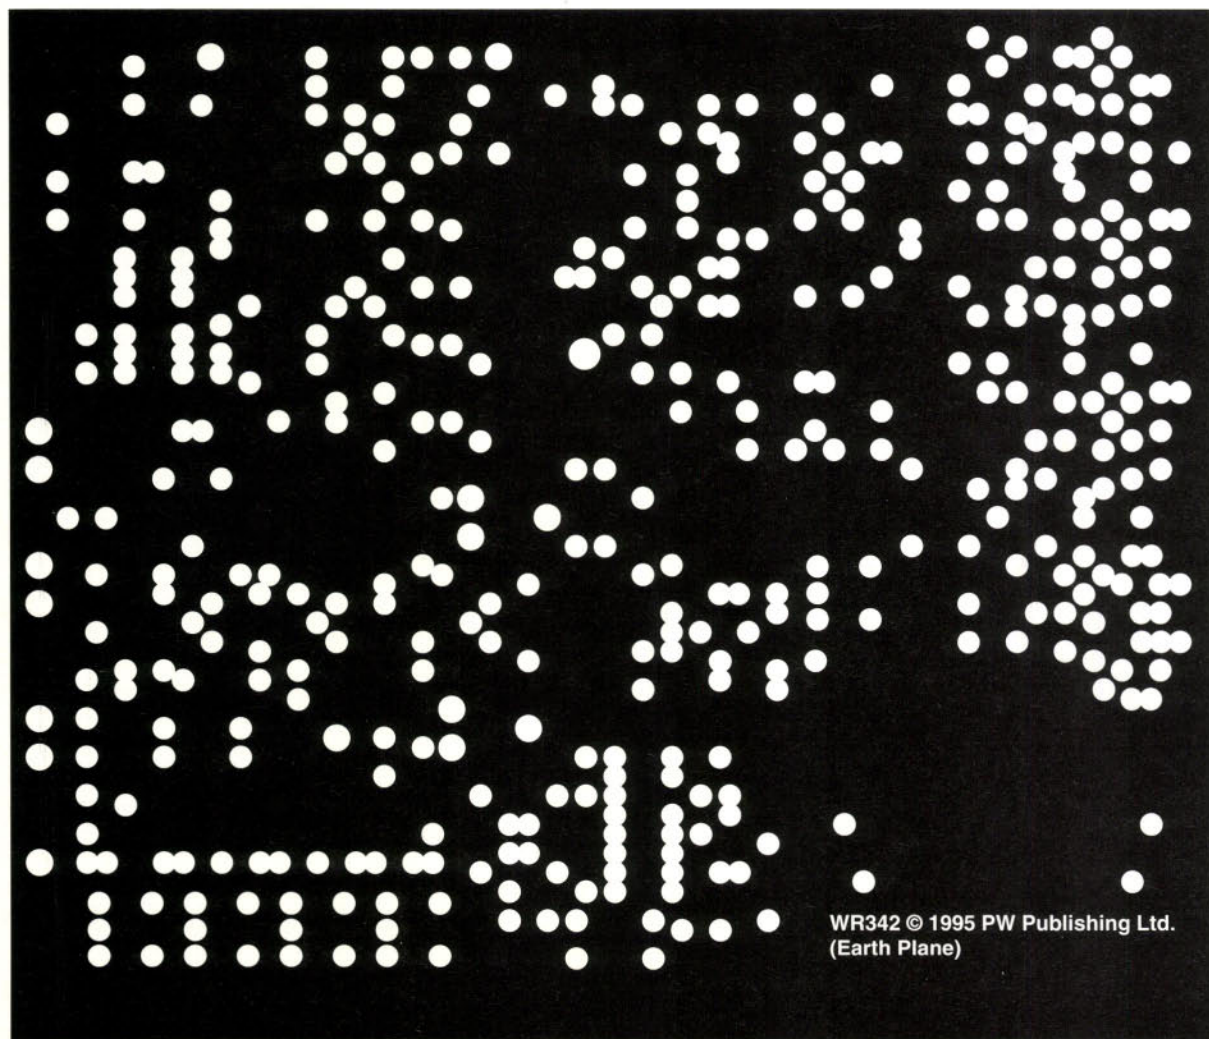

WR342 © 1995 PW Publishing Ltd.
(Earth Plane)

Fig. 4: Ground-plane details for the p.c.b.

But, without the tuning capacitor connected and the p.c.b. 'naked' on the bench it won't be a usable receiver yet. Despite this it should be apparent if the receiver seems to be working, or else needs some further soldering and

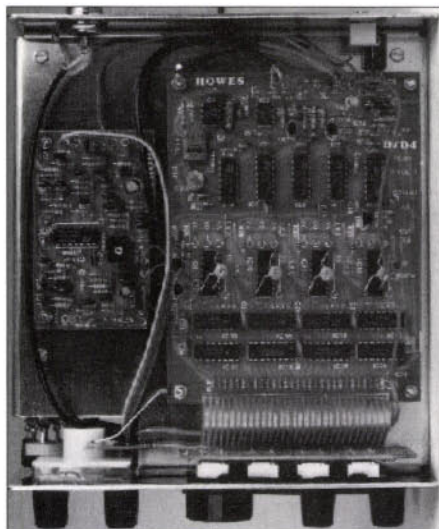


Fig. 2: Topside view of the PW Daventry prototype. This receiver incorporates a digital frequency read-out option which is available as a separate kit. (See panel at end of article for details on the various kit options which are available direct from C. M. Howes).

assembly checking.

Once your tests indicate that the module is functioning, it can be installed in a case. Then you should wire the module up properly to its controls and connectors.

Aluminium Case

I decided to build the prototype for the PW Daventry into an aluminium case that I had to hand (as used for some other projects in the Howes Kits range). This size case enabled the installation of a couple of additional p.c.b.s to 'jazz up' the receiver to make it a little more up-market.

The boards I used provide digital frequency read-out and additional a.f. filtering. But, if you prefer to keep the project as simple as possible, then there is no need to add these extra facilities, the receiver works fine without them. However, the extra selectivity and an accurate frequency display will add to the appeal of the receiver.

A simpler case can be used if these optional items are omitted. The prototype's case has a central chassis with the receiver p.c.b. mounted below it, and the optional extras above.

If Tex Swann G1TEX the PW photographer does his stuff, the layout should be clear from the photographs. (He did, and they are! Editor!).

The chassis provides the screening between

the digital display and the receiver. There's no trace of any pick-up of the digital circuitry audible in the receiver. Indeed with the antenna disconnected, there is no audible trace of any spurious signal over the 7 to 7.1MHz frequency range in the prototype.

The p.c.b.s are mounted in the case on M3 bolts with nuts and washers used to space them off the chassis. To obtain the correct fixing hole locations, the p.c.b.s were simply positioned in their correct places and the chassis marked through their fixing holes with a felt tip pen.

When I had done the marking out however, it turned out that one of the digital display's front fixing holes was under the mounting position for the tuning capacitor bracket. So a countersunk head bolt had to be used to get me out of trouble!

However, a second attempt at drilling one of the bracket's fixing holes was needed. It was too close to this countersunk fixing, so it ended up offset slightly to the left of my original intention.

Apart from the little problems mentioned, everything went together easily. Pretty good for a first prototype!

In my experience, it's always the mechanical bits that don't fit that cause the biggest problems in any design project. Sorting out the electronics can sometimes cause the odd headache – but if it won't fit in the box you are really in deep trouble!

Continued on page 61 ►

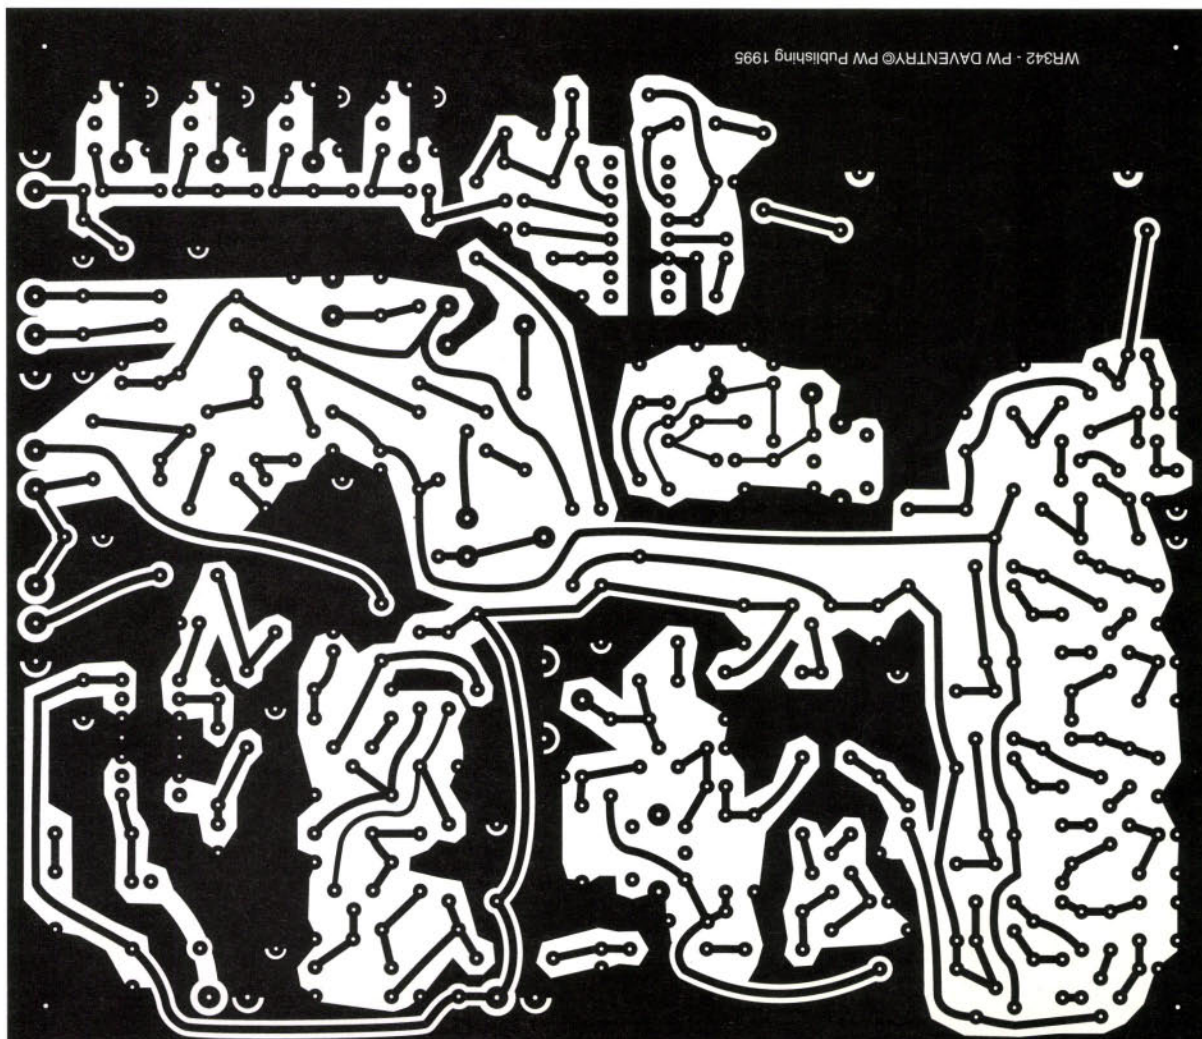


Fig. 5: Printed circuit track design for the Daventry project.

RST LANGREX SUPPLIES LTD RST
PHONE 0181 684 1166 FAX 0181 684 3056
DISTRIBUTORS OF ELECTRONIC VALVES TUBES AND SEMICONDUCTORS AND I.C.S.
1 MAYO ROAD • CROYDON • SURREY CR0 2QP
24 HOUR EXPRESS MAIL ORDER SERVICE ON STOCK ITEMS

AZ31	5.00	EL91	3.00	PY500A	4.00	6BA7	5.00	6SK7	3.00
CL33	10.00	EL95	2.00	PY800	1.50	6BE6	1.50	6SL7GT	4.50
DY86/7	1.50	EL360	18.50	PY801	1.50	6BH6	2.50	6SN7GT	4.50
E88CC Mull	8.50	EL509	10.00	QOV02-6	12.00	6BJ6	2.25	6SS7	3.00
E180F	3.50	EM34	15.00	QOV03-10	5.00	6BN6	2.00	6U8A	1.50
E810F	22.00	EM81	4.00	QOV03-10 Mull	15.00	6BQ7A	3.50	6V6GT	4.25
EAB8C0	2.00	EM84	4.00	QOV03-20A	15.00	6BR7	6.00	6X4	3.00
EB91	1.50	EM87	4.00	QOV06-40A Mull	30.00	6BR8A	4.00	6X5GT	2.50
EBF80	1.50	EN91 Mull	7.50	QV03-12	8.00	6BS7	6.00	12AT7	3.00
EBF89	1.50	EY51	2.50	U19	10.00	6BW6	4.50	12AU7	3.00
EBF89	1.50	EY86	1.75	UABC80	1.50	6BW7	1.50	12AX7	3.50
EBL31	15.00	EY88	1.75	UBF89	1.50	6BZ6	2.50	12AX7A GE.	7.00
ECC33	3.50	EZ80	3.50	UCH42	4.00	6C4	2.00	12BA6	2.50
ECC35	7.50	EZ81	3.50	UCH81	2.50	6C6	5.00	12BE6	2.50
ECC81	3.00	GY501	3.00	UCL82	2.00	6CB6A	3.00	12BH7A GE	6.50
ECC82	3.00	GZ32 Mull	8.50	UCL83	3.00	6CD6GA	5.00	12BY7A GE	7.00
ECC83	3.50	GZ33	6.00	UF89	4.00	6CL6	3.75	12E1	15.00
ECC85	3.50	GZ34 GE	7.50	UL41	12.00	6CG7	7.50	12HG7 12GN7	6.50
ECC88 Mull	6.00	GZ37	6.00	UL84	3.50	6CH6	5.00	30FL1/2	1.50
ECQ31	2.00	KT61	10.00	UY41	4.00	6CWH4	8.00	30P19	2.50
ECF80	1.50	KT66 China	10.00	UY85	2.25	6D6	5.00	300B(PR)	110.00
ECH35	3.50	KT88 China	12.00	VR105/30	2.50	6DQ5 GE	17.50	572B	70.00
ECH42	3.50	N78	9.00	VR150/30	2.50	6DQ6B	12.50	805	50.00
ECH81	3.00	OA2	2.70	Z759	25.00	6EA8	1.85	807	5.75
ECL80	1.50	OB2	2.70	Z803U	25.00	6EH5	3.50	811A	18.50
ECL82	3.00	OC3	2.50	ZD21	3.50	6F6	3.50	812A	65.00
ECL83	3.50	OD3	2.50	ZB28	20.00	6F07	7.50	813	27.50
ECL86 Mull	3.50	PCF80	2.00	4CX250B STC	55.00	6GK5	5.00	833A	85.00
ECL800	25.00	PCF82	1.50	5R4GY	6.00	6H6	3.00	866A	25.00
EF37A	3.50	PCF86	2.50	5U4G	5.75	6HS6	4.95	872A	20.00
EF39	2.75	PCF801	2.50	5V4G	4.00	6J5	3.00	931A	25.00
EF40	5.00	PCF802	2.50	5Y3GT	2.50	6J6	3.00	2050A GE	10.00
EF41	3.50	PCL82	2.00	5Z3	4.00	6J7	4.00	5751	6.00
EF42	4.50	PCL83	3.00	5Z4GT	2.50	6J86A GE	19.00	5763	10.00
EF80	1.50	PCL84	2.00	6AH6	4.00	6JE6C	20.00	5814A	5.00
EF85	1.50	PCL85	2.50	6AK5	1.50	6JS6C GE	17.50	5842	12.00
EF86	7.50	PCL86	2.50	6AL5	1.00	6K6GT	3.00	6080	7.50
EF91	2.00	PCL805	2.50	6AM6	2.00	6K7	4.00	6146B GE	15.00
EF92	2.00	PD500	6.00	6AN5	5.00	6K8	4.00	6550A GE	20.00
EF183	2.00	PL36	2.50	6AN8A	4.50	6L6G	8.50	6883B GE	16.00
EF184	2.00	PL81	1.75	6A25	3.25	6L6GCSYL	12.50	7025 GE	7.00
EL32	2.50	PL82	1.50	6AR5	25.00	6L6GC Siemens	7.50	7027A GE	17.50
EL33	10.00	PL83	2.50	6AS6	3.00	6L6GC GE	12.50	7199	12.00
EL34 Siemens	8.00	PL84	2.00	6AS7G	9.50	6L7	3.50	7360	25.00
EL36	4.00	PL504	2.50	6AT6	2.00	6LQ6/6JE6C	20.00	7581A	15.00
ELL80	25.00	PL508	5.50	6AU5GT	5.00	6Q7	4.00	7586	15.00
EL41	3.50	PL509	6.00	6AU6	2.50	6RH8B/6KN8	12.00	7587	23.00
EL81	3.00	PL519	6.00	6AW8A	4.00	6SA7	3.00	7866	15.00
EL84	2.25	PL802	4.00	6B7	4.00	6SC7	3.00	8417GE	20.00
EL84 Mull	6.00	PY81	1.50	6B8	4.00	6SG7	2.50		
EL86	2.75	PY88	2.00	6BA6	1.50	6SJ7	3.00		

Prices correct when going to press

OPEN TO CALLERS MON-FRI 9AM - 4PM. CLOSED SATURDAY
 QUOTATIONS FOR ANY TYPES NOT LISTED.
 OVER 6000 TYPES AVAILABLE FROM STOCK.
 OBSOLETE ITEMS A SPECIALITY.
 TERMS C W O / VISA / ACCESS
 P&P 1-3 VALVES £2.00, 4-6 VALVES £3.00 ADD 17.5% VAT TO TOTAL INC P+P

NINTH NORTH WALES RADIO RALLY

AND ELECTRONICS FAIR

Two day event to be held in North Wales at the

ABERCONWAY CONFERENCE CENTRE, LLANDUDNO

on

Saturday/Sunday 4th & 5th November 1995
10.00am - Teatime

Bring and Buy at ground floor level in the New Theatre.

Raffles, snack bars, etc.

146 stalls including RSGB Book stall, many Club Stands, Computers, Components, Radio Electronics, 27/234MHz, Satellites, Data Transmission, TV and lots more.

Bring the family for the weekend. Ample accommodation at low winter rates. One hour from Manchester via dual carriageways all the way to the rally.

Ample free parking. Talk-in on S22 and SU8

Admission £1.50
 (Children under 14, free)



14th October
Rochdale QRP Convention

20/21st October
Leicester Show
 (Stand S22A)

VISIT US FOR THE BEST IN:

Kits: C M Howes, Wood & Douglas, Oak Hills Research

Keys: Bencher, Jones, Kent, plus Tutors and Keyers, and a selection of used keys and paddles

QRP: Index Labs. "QRP Plus" HF Tcvt - IN STOCK also TEN-TEC and used QRP rigs

G3TUX

The QRP Component Company
 PO Box 88, Haslemere, Surrey GU27 2RF
 TEL: 01428 641771 FAX: 01428 661794



PW PCB SERVICE

PRACTICAL WIRELESS PCB SERVICE

Printed Circuit Boards for *Practical Wireless* constructional projects are available from the Practical Wireless PCB Service.

The boards are made in 1.5mm glass-fibre and are fully tinned and drilled. When ordering PCB's please state the article title, magazine cover date and the board number.

Mark your envelope **Practical Wireless PCB Service.**

Cheques to be crossed and made payable to: **Badger Boards.**

Please print your full name and address in block capitals and do not enclose any other *Practical Wireless* correspondence with your order.

Please allow 28 days for delivery.

Send orders and remittances to:

Badger Boards, 80 Clarence Rd, Erdington, Birmingham B23 6AR.
Tel: 0121-384 2473

Table 1 (Alignment)

These are the mechanical settings of the preset components taken from the prototype receiver.

Part	Adjustment
L1, L2, L3 & L4	Core 3mm below top of screening can
L7	Core 1mm below top of screening can
L8	Core 2.5mm below top of screening can
R85	Set half way
R88	Turned one third clockwise
C40	Vanes one third meshed

► Continued from page 59

Tuning Capacitor

For the tuning on the Daventry, I used a 50pF air-spaced variable capacitor driven by an in-line reduction drive with about a 30:1 ratio. This capacitor connects across C72 to reduce the frequency swing of the circuit. A terminal is provided on the board for connection of a much smaller value capacitor or tuning diode if you wish to use electronic tuning. (*Editorial note perhaps a v.h.f. varicap diode with approximately 2 to 10pF swing would be adequate. G1TEX.*)

On testing the prototype, I pulled off some of the capacitor's vanes until I achieved the tuning range I wanted. The v.f.o. was finally set to tune the receiver from 7 to 7.1MHz with about 5kHz extra at each end of the range.

Setting the tuning coverage involved pruning the capacitor until it had three moving vanes and three fixed ones (it started out with six moving and seven fixed). This procedure is best done after the receiver has been fully wired and tested in its case.

With the ball-drive used, the tuning rate is around 8kHz per turn, which is quite slow. So, an 8:1 'vernier' type tuning dial would work quite well if you fancy an alternative arrangement.

Final Alignment

Once everything is wired up in the case, and it all seems to be working, then you should carry out the final alignment of the receiver to maximise the performance.

Use another receiver or a frequency counter with a high impedance probe to set C40 for the specified u.s.b. carrier frequency for your crystal filter (hold the probe near Tr6). Then align the v.f.o. coil (L8) so that the receiver tunes from approx. 7 to 7.1MHz.

Use a signal generator or crystal calibrator to set the v.f.o. tuning. But if you are using a digital readout in your project, then you can read the frequency directly.

To align the r.f. front-end filter, tune the receiver to a steady signal at about 7.05MHz and simply tune L1, L2, L3 and L4 for maximum signal strength. The S-meter alignment is carried out as detailed above.

Your receiver can now be air tested to see how it performs in practice. It should give a good account of itself and give clearer reception than many more expensive factory made receivers. Who said '40' was too noisy to hear anything?

PW

Shopping List For The PW Daventry

Resistors

Carbon Film 0.125W

100Ω	8	R12, 13, 21, 22, 30, 31, 39, 40
220Ω	1	R16
470Ω	1	R9
680Ω	3	R25, 33, 42
2.2kΩ	4	R10, 20, 29, 36
10kΩ	3	R19, 28, 38
82kΩ	1	R11
100kΩ	3	R18, 27, 37

Carbon Film 0.25W

2.2Ω	3	R2, R3, R71
10Ω	2	R89, 92
47Ω	4	R8, 53, 61, 83
100Ω	8	R14, 17, 23, 26, 32, 35, 49, 94
150Ω	3	R5, 6, 65
330Ω	2	R91, 93
390Ω	1	R4
470Ω	4	R46, 52, 66, 76
560Ω	1	R7
1.0kΩ	4	R41, 54, 55, 87
1.8kΩ	2	R58, 59
2.2kΩ	6	R15, 24, 34, 43, 51, 60

3.3kΩ	2	R45, 86
4.7kΩ	4	R63, 69, 70, 75
10kΩ	8	R1, 44, 48, 50, 64, 68, 72, 74

33kΩ	3	R47, 77, 81
47kΩ	1	R57
56kΩ	2	R56, 62
100k	6	R73, 78(a.o.t.), 79, 80, 82, 90

Miniature preset (horizontal mounting)

5kΩ	1	R88 (a 4.7kΩ type may be used)
-----	---	--------------------------------

2.2MΩ 1 R85

Variable (rotary panel mounting)

5kΩ	1	R84 (linear)
5k	1	R67 (logarithmic)

Capacitors

Plate ceramic (NPO)

2.2pF	3	C3, 4, 7
-------	---	----------

Plate ceramic (N150)

47pF	4	C2, 5, 6, 42
68pF	1	C8
120pF	1	C71
150pF	1	C43

Disc Ceramic

22pF	1	C73
100pF	1	C44

1nF	20	C10, 11, 12, 18, 20, 22, 23, 24, 27, 28, 29, 32, 33, 34, 36, 37, 38, 45, 47, 57
10nF	13	C15, 19, 21, 25, 26, 30, 31, 35, 39, 54, 67, 68, 69
100nF	9	C13, 14, 17, 41, 58, 74, 75, 76, 77

Mylar

10nF	1	C56
22nF	1	C50
100nF	8	C46, 49, 51, 53, 55, 61, 64, 65

Polystyrene 2.5%

120pF	1	C9
330pF	2	C1, 72

Film Trimmer (horizontal mounting)

65pF	1	C40
------	---	-----

Variable C804 type

50pF	1	C70
------	---	-----

Electrolytic 25V working (radial lead)

22μ F	4	C16, 52, 59, 66
100μ F	3	C60, 62, 63
470μ F	2	C48, 60

Semiconductors

1N4004	1	D3
1N4148	1	D1
2N3053	1	Tr14
BC307B	1	Tr12
BC550C	4	Tr8, 9, 10, 11
BF245A	2	Tr1, 13
BF981	5	Tr2, 3, 4, 5, 7
BSX20	1	Tr6
BZX55C10	1	D2 (10V Zener diode)
LM380N	1	IC2
SL6440C	1	IC1

Inductors

Axial (10%)

8.2μ H	1	L6
220μ H	2	L5, 9

Toko shielded type 10K

K1731	2	L7, 8
K4921	4	L1, 2, 3, 4

Miscellaneous

One 10.7MHz (30pF parallel) for XL1, one 10.7MHz 2.4kHz bandwidth filter with 200Ω Z_{in} and Z_{out} (Howes part No. XFL6-10.7-2.4). One TO5 size heatsink and mounting pad (for Tr14), a case to house the unit, connecting wire, terminal pins, plugs and sockets, a 6:1 (or 36:1) slow motion drive. You will also need a frequency display, knobs other items to suit your own version of the project.

Kits For the PW Daventry Project

Dave Howes has informed us that the retail prices for the kits for the PW Daventry will be as follows:

DAV40 Electronics kit: priced at **£69.90**. This is the electronics kits with p.c.b. and all board mounted components including crystal filter plus the control potentiometers. The r.f. attenuator is **not** included.

SHS1 Moving coil S-meter: Price **£8.90** scaled as shown in Daventry article photographs.

HA40R basic hardware pack: Price **£27.90** (not as per photograph, no digital read-out provision or r.f. attenuator) but including 8:1 slow-motion drive,

50pF tuning capacitor, knobs, sockets, nuts and bolts, etc. Size and styling to match other Howes receiver hardware packs. (for comparison purposes, see DXR20/HA320R kits in the C. M. Howes advert).

CA40M Deluxe hardware pack: Price **£59.90** Dave Howes informs us that this hardware pack (as per article photographs) including high reduction ball drive, display bezel, knobs etc., will be available if there is enough demand.

Please contact **Dave Howes G4KQH at C. M. Howes Communications, Eydon, Daventry, Northamptonshire NN11 3PT, Tel: (01327) 260178** regarding for any enquiries regarding the kits for the Daventry project.


BOOK BONANZA

The PW Book Service Department offers you the chance to buy two popular publications at very special prices.

Worked All Corners Of The World?

Looking For A New Challenge?

Ever Considered Working The World Via Satellite?

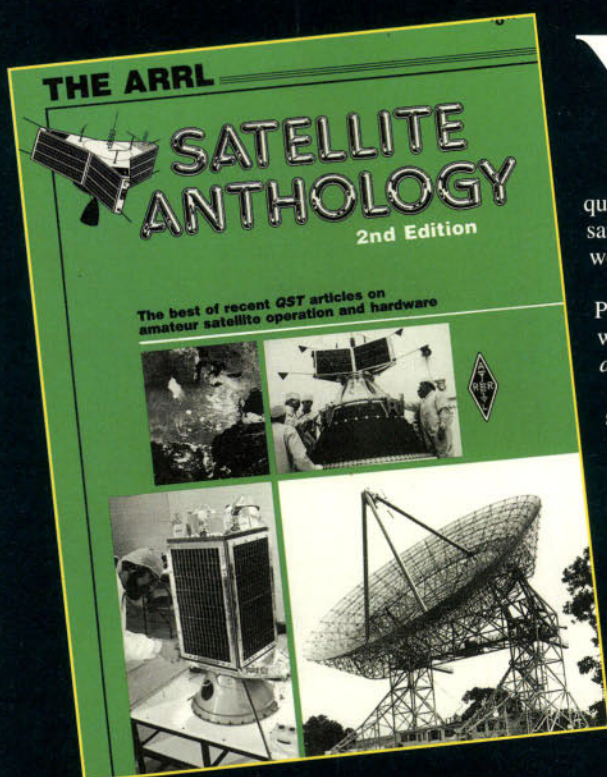

You may not have thought of satellite operation because you considered it too expensive, or too difficult. You don't know where to look for information about how to work via satellites, but were afraid to ask.

The Satellite Anthology 2nd Edition can answer many of the above questions. There are 84 large pages packed with information about the way satellites work, what frequencies they use, what is the challenge of satellite working and other topics.

Find out how the present satellites are constructed, or what advantages Phase 3C satellites will bring to the amateur communications. This book is a wealth of information. Now there's no need to feel left out when *perigee* and *apogee* pop up in conversations.

Find out all you may need to know about satellite working with this special offer. *The Satellite Anthology 2nd Edition* from the ARRL is available to *Practical Wireless* readers for the special price of only **£2.95 + £1 P&P (£1.75 P&P overseas)**.

Stocks of *The Satellite Anthology 2nd Edition* are limited and are going fast, so get your order in today, or you may miss the next satellite!


The PW Book Service have recently received first shipments of the 1996 edition of *Passport To World Band Radio* ready for you to read. This book has over 340 pages of news, views and reports of radios and radio stations from around the world.

There are a further 200 pages in the section called 'The Blue Pages'. The Blue Pages are ideal for identifying station by looking up the frequency and the time of transmission.

When you've found out who you're listening to, you get additional information about the station. Find out what power is being used, what other times of days should you hear it. Find out much more information from the one line entry.

Get your copy of the 1996 *Passport To World Band Radio* hot-off-the-press, for **£14.50 with free P&P in the UK** (overseas readers P&P rates available on application).

CAN YOU AFFORD TO BE WITHOUT THIS BOOK?

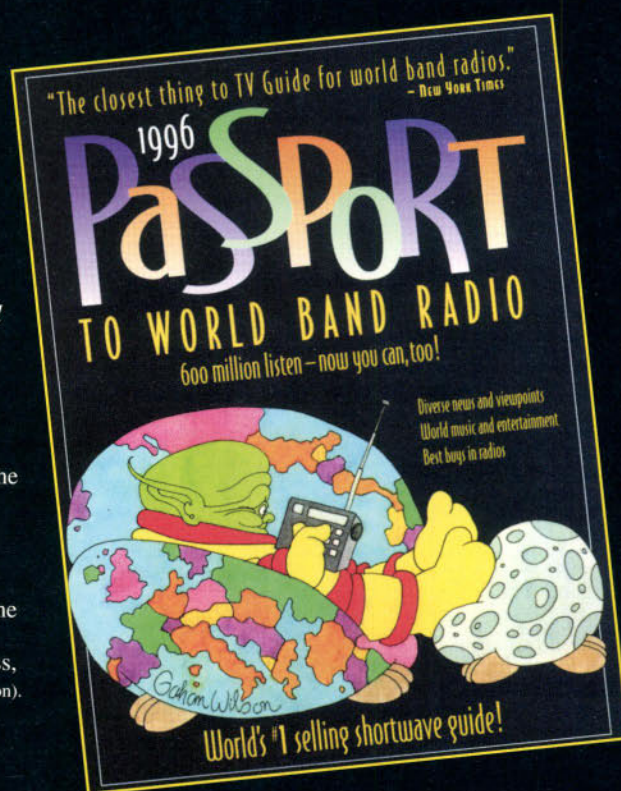

To order either of the books mentioned here please use the Order Form on page 78 of this issue or call our Credit Card Hotline on (01202) 659930 to place your order.

EQUIPMENT

SPECIFICATIONS

Ian Poole G3YWX, begins to unravel and explain the mysteries behind transmitter specifications.

One of the most basic parameters for any transmitter is its output power. Its main purpose is to generate a radio frequency signal which can be radiated by the antenna, and the size of this signal is

today, this was not the case many years ago. As a result it was decided that the best way to measure the capability of a transmitter was to measure the power entering the final amplifier stage. This was very much easier because ordinary test meters

transmission the only point which can be measured is the peak power of the envelope of the signal being transmitted, i.e. the peak envelope power (p.e.p.). This can be related to the power of an ordinary a.m. transmitter. When fully modulated i.e. with 100% modulation the voltage peak of the signal rises to twice that of the normal level as shown in Fig. 2.

If the voltage doubles then the power will rise four fold. In other words a 150W a.m. transmitter will have a peak power input of 4 x 150W, or 600W. Assuming an efficiency of 66%, this gives a peak envelope output power of 400W.

Expressed In Decibels

Apart from measuring power directly in watts, the term dBW is now seen quite often. In fact, the power levels mentioned in the licence are all referred to in terms of dBW and not directly in watts.

Although dBW may not be quite as easy to use, its concept is quite straightforward. It's simply the measured power expressed in decibels relative to 1W.

To give an example, a power of 10W is 10dB increase on 1W, and so it can be described as a level of 10dBW. Similarly a power of 400W is 26dB above 1W and this means it can be expressed as 26dBW.

Sometimes the term dBm may be

seen. This is exactly the same as dBW except that the ratio is expressed as a comparison with a milliwatt.

Naturally dBm is used for lower power levels, and may be used for intermediate stages in the set, or for specifying levels for components like mixers. For example the drive levels for the ports may be +12dBm.

That's it for this month, don't forget if there are any specification mysteries you'd like unravelled drop me a line via the PWEditorial Office and I'll do my best to solve them.

As Ian says, some power meters are not very accurate. However, they are a good indication of what r.f. power is available. And you can make your own power meter.

For low power transmitters the following circuit will work quite well up to at least 144MHz and 10W of power. But RL must be able to stand the maximum power and may be made from multiple resistors.

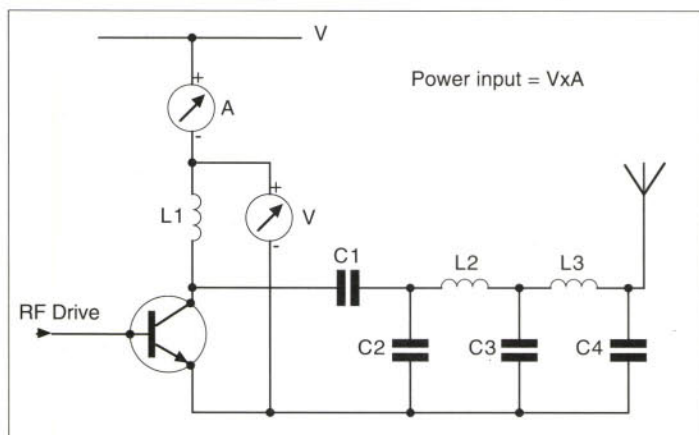
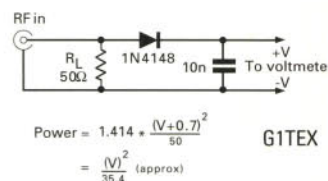


Fig. 1: Measuring the input power to the final amplifier stage.

of fundamental importance.

There is an enormous variety of transmitter output powers. At the low end of the scale are the h.f. QRP sets and the v.h.f./u.h.f. handie talkies running just a few watts.

At the other end there are the high power systems running the full legal limit of 400W. However, there are a number of ways in which this power can be expressed, and this can often lead to some confusion.

Input And Output Power

The most obvious way of measuring the power of a transmitter is to place a power meter on its output. Unfortunately, it's not always easy to measure the power output in this way.

Power measurement cannot be done using an ordinary test meter because of the frequencies involved. Instead, a special power meter must be used.

Today many s.w.r. meters give a power reading, but this is not always very accurate, typically only within about 10%. Even meters like Bird ThruLines are only specified to give an accuracy of ±5%.

Although it's easy to obtain a reasonably accurate power meter

could be used and accurate results obtained.

The power entering the final amplifier is simply the d.c. voltage times the d.c. current supplying the stage as shown in Fig. 1. Being so much easier to measure the input power used to be the quantity which was specified in the transmitting licence. A maximum 10W input was the limit on 'Top Band' (1.8MHz), and 150W input on the other h.f. bands, etc.

Naturally the output power is dependent on the input power. As a rule of thumb it's often possible to have an efficiency of up to 66%. With this efficiency a radio frequency amplifier with 100W input power will generate 66W of a radio frequency signal.

Peak Envelope Power

The 'power in' method of measuring the input power of a transmitter was quite satisfactory for c.w. or a.m. transmissions. But, when s.s.b. came along it was not possible to measure the steady direct current input to the last amplifier because the input power level varied according to the level of the audio.

To measure an s.s.b.

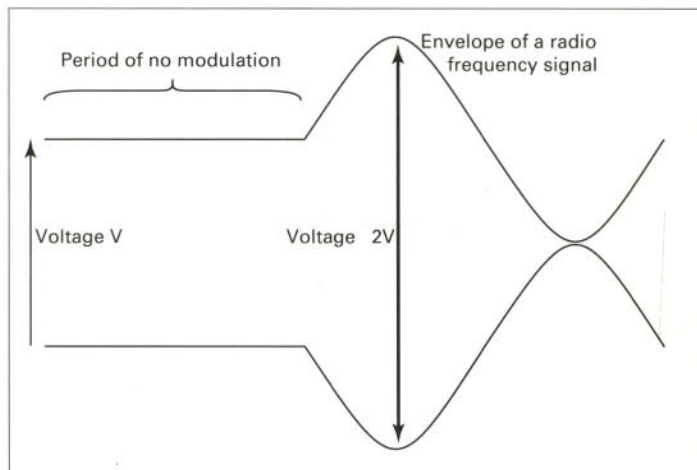


Fig. 2: An a.m. signal with 100% modulation.

END

LEIGHTON SMART GWOLBI

HF FAR & WIDE

Leighton Smart GWOLBI provides his monthly report on what's happening on the h.f. bands and judging by the number of reports this time...there's a lot happening on h.f.!

At the time of writing, (August) the hot weather has given no indication that it is going to let up. As a result, many of our reporters have taken refuge in the relatively cooler temperatures of their respective stations, and have produced a large amount of DX reports for the column.

Conditions seem to be very patchy according to our reports. This is as usual for the summer months, but reasonable propagation has been reported on the bands below and including 14MHz, particularly from the evening onwards.

The 7MHz band has been quite productive in the early mornings, particularly on c.w. So listening or operating on this band from 0400UTC onwards may pay good dividends.

It seems that the 'summer doldrums' can provide some good DX. And I guess that our reporters know just where and when to look!

Andaman Island

Professor Oshan Fernando 4S70F in Sri Lanka has sent information on VU2JPS (Port Blair, Andaman Island). This station is now active around 14.200MHz s.s.b. with VU2AU co-ordinating traffic from mainland India. He operates almost every day at around 0300 and 0900UTC.

As for himself, Oshan is also busy. He's active around 14.225MHz s.s.b. and 14.020MHz c.w. from 1130UTC onwards.

Your Reports

This month we have no less than 15 reporters, so without any further ado, and in order to save space, I'm going into your reports starting with the 1.8MHz band.

'Top Band' has been affected very heavily recently with high levels of atmospheric noise, 'static crashes' and so on. They can cause S-meter needles jump to full scale!

However, **Eric Masters GOKRT** in Worcester Park, Surrey, has been busy. Using his QRP Plus and a modified W3EDP wire antenna, 26 metres long, Eric managed to work GX4SGL (Feltham Sea Cadets club station in Middlesex), and G2HS also in Middlesex, both on 5W s.s.b. at around 1945UTC.

On c.w., Eric had his best DX so far on 1.8MHz. This was when he worked LA5FHA (Norway) at 2251, and SM6PXI Gotene, (Sweden), at 2301, again on 5W.

John Heys G3BDQ near Hastings has found conditions on the higher bands to be very poor generally. But he turned up on 1.8MHz during daylight hours (at 1048UTC) to work G3ZGC in Newbury, G3RZN/M and 'the Cobweb Antenna man' Steve G3TPW in York. All on s.s.b. with 30W.

John says that 1.8MHz can offer good contacts during daylight hours with stations all over England (and all over Wales, John!) providing locally generated electrical noise is not too high. Sunday mornings seem to be very popular for rag chewing on this band, usually around 1.933MHz.

The 3.5MHz band

Dave Griffiths GW0JUJ in Pontypridd, Wales, has been trying out the 'DX section' of the 3.5MHz band for the first time. He reports working (to his great satisfaction) Bill VK6ACY (Australia), 56 at 2301UTC, and Juan LU9VAJ in Rio Negro (Argentina) at 2200. Dave uses a Kenwood TS-440 transceiver at 100W on 3.5MHz, into an 80m long wire.

Short wave listener **Dennis Sheppard** in Earl Shilton, Leicestershire, using a KW2000 and a 20m sloping wire antenna reports hearing our very own Rob G3XFD, working EI7BA in Cork (Republic of Ireland) on s.s.b. on 3.734MHz. Dennis reports Rob's audio as sounding somewhat muffled. Get it sorted Rob! (*All fixed Leighton! Editor*).

Incidentally, Dennis has been trying h.f. RTTY for the first time. He lists hearing GM3KHH working G3EFY via this mode at 1451UTC.

Eric GOKRT has been busy here as well on 3.5MHz. He logged QSOs with Tony 2E0AIR in Cambridge at 1658UTC, G0PEM at 0700 during the RSGB low power contest, and Paul LA6CAA (Norway) at 0021, all with QRP c.w.

The 7MHz Band

John G3BDQ, using a doublet antenna on the 7MHz band, has stuck

entirely to c.w. due to the poor conditions on the bands. He lists contacts with JH6QZW (Japan) at 2106, SV9/DJ0MBT (Crete) at 2117, 7X2ZV (Algeria), through a huge pile up at 2052, and A7IEZ (Qatar), at 2056UTC. John managed all with a maximum power output of 80W.

Keen s.w.l. **Charlie Blake RS96034** in Milton Keynes uses an NRD 525 receiver and 11m sloping wire. He listened extensively around his usual monitoring frequency of 7.065MHz, and reports s.s.b. reception of VE3YJ Canada, in QSO with G3NL at 0515UTC, VK7AZ (Australia) working F3RT in France, Donald LA0EP (Norway) working Colin G4FZJ at 06.34, OE6MBG Austria, working ZL2APW (New Zealand) at 0504. Later Charlie heard HB9IAM (Switzerland) in contact with XE0EWC in Mexico. He also logged HB9FAD working Gil, GOAOR at 0500, and IK1LOC Italy (who had very distorted audio) working G00WT at 0507UTC.

From the Isle of Sheppey in Kent comes another 'early bird' - **Ted Trowell G2HKU** who has been very active on 7MHz. Using all c.w. from his Ten Tec Omni V rig at 70W plus G5RV and HF6 vertical antennas to work some very nice DX.


Ted has listed 3V8AS (Tunisia), ZL2AGY New Zealand, VK2ZC and VK3MR in Australia. Ted mentions that VK3MR is 86 years of age and he remembers first working him 50 years ago.

At the other end of the age scale, Ted worked K04IO Washington DC in the USA. The operator is just 12 years old, and was using a Yaesu FT-747 and R7 vertical antenna.

Finally, for this band, Ted reports contacts with FY5YE (French Guiana), and FM5DJ (Martinique Island). All contacts took place around 0500UTC.

Carl Mason GW0VSW in Skewen, West Glamorgan, has had a few contacts on 'Forty' recently. Carl used his Icom 737A transceiver at 50W and a G5RV dipole.

Carl lists s.s.b. contacts with DA0RAF (Germany) at RAF Bruggen at 1057UTC, (QSL via G0TQJ), TM7XX (France) at 1222. He also worked PA6WSJ, the special call for the World Scout Jamboree, in Dronton,

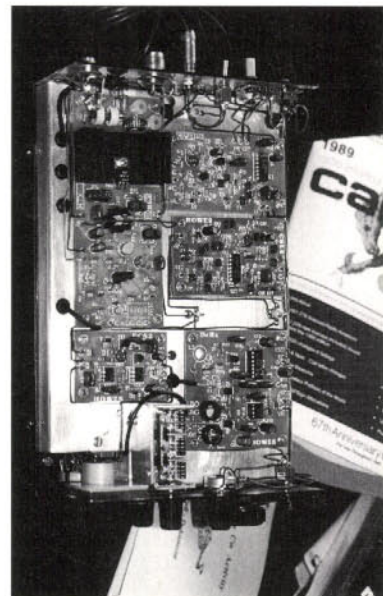

Gordon Foote G7NCR uses a Howes Communications d.c. RX for his s.w.l. activities (see text).

Netherlands at 1329, and while on c.w. Carl reports CT1ETT/P (Portugal) on the Algarve, at 0555UTC.

The 14MHz band

Again the 14MHz band has been the most productive band, as our reporters show. And I'll start off with **Steve Locke GW0SGL** in Mountain Ash, Mid Glamorgan.

Steve recently acquired a Kenwood TS-940 rig. And running 100W s.s.b. into a TH7 beam antenna at 20m has reported contacts with HZ1TA (Saudi Arabia), at 1644 (QSL via OE6EEG), JT1BG (Mongolia) in Ulan Bator, at 1707, 4S7EA Sri Lanka at 1845.

He also worked 9M8FC (Malaysia) at 1816 and Bob ZS5BL in Durban, South Africa at 1715. (Bob operates on 14.164MHz every evening at 1815UTC). Also logged club station 3V8BB (Tunisia) at 1726, and 9G1BG Ghana, at 1803, (QSL via G4XTA) 5A1A (Libya), at 2314, 9L1PG (Sierra Leone) in Freetown with a 59 +10db signal at 2049, and D3T (Angola), at 2313UTC (QSL via ON5NT).

Steve says he has found conditions variable, with propagation reasonably good after 1530UTC to the East, with Africa coming in well after 1700. For some reason, he found propagation to the West not so good this month. He also mentions T88A 'Principality of Seborga', and wonders about its legitimacy and/or

DXCC status. Any information on this anyone?

Oshan Fernando 4S70F in Moratuwa, Sri Lanka, (briefly mentioned already) reports for the first time. Oshan logged s.s.b. contacts with TT8NU (Chad), 9U/F5FHI (Burundi), 9N1RHM (Nepal), 9K2TA (Kuwait), HZ1AB (Saudi Arabia). He also worked A71DX (Qatar), VK9XI (Christmas Island), VK9CJ (Cocos Keeling Island), and a c.w. contact with 3W5FM (Vietnam).

Our 'Yeovilian' DXer, **Don Mclean G3NOF** has a station comprising a Kenwood TS-940 100W transceiver and a 3-element beam. He indicates that conditions have again been patchy but some good openings have been apparent.

Don says that the best times for DX have been in the evenings, from around 1600UTC onwards. Little DX has been heard during the mornings and early afternoons. His large 14MHz s.s.b. log includes HC8KU (Equador), at 2314UTC (QSL via DK5VP), PJ7/K2GSJ (Leeward Islands) at 2207, T88A (Seborga) at 2256 (QSL via 11RBJ), VP5/KN4UG (Turks & Caicos Islands) at 2030, 3V8BB Tunisia at 2044, (QSL via G0UCT - QSL info varies with different operators), 9G1RY (Ghana), at 1946 (QSL via PO Box 932, Accra, Ghana), and 9L1PG (Sierra Leone), at 1715UTC (QSL via NW8F).

Dave GW0JUU reports success with his new TH3 beam antenna on 14MHz by listing 100W s.s.b. contacts with HK4QIM (Colombia) at 2231UTC, TI7DBS (Costa Rica), at 2329, ZS2BL (South Africa), at 1710, AP2MH (Pakistan), at 1730, XJ1CWI (Pictou Island) at 2308, AH8A in Poa Poa (American Samoa) at 0757, Y11RS (Iraq) in Baghdad at 1748, and finally VE7GAS/VP9 (Bermuda), at 2300UTC.

No less than four logs were received this month from **Gordon Foote G7NCR** in Bristol, of which here is only a small selection due to space limitations. Gordon uses a Howes d.c. RX receiver, shown in **Fig 1**, on this band with a 20m end fed wire antenna.

The 'cream' of Gordon's reception reports on 14MHz are CP2AA (Bolivia) at 1840UTC, ZS6LAW (South Africa) in QSO with F5PFP at 1915, and SM6FJY (Sweden) working G0JRR at 1832.

Gordon also logged ET3AA (Ethiopia) in contact with HA5BAW (Hungary) at 1643, TU5BC (Ivory

Coast) working IT9BLB at 1815 and 9K2MU Kuwait, in QSO with G0DDL at 1747.

'Aeronautical Mobile' WD5JYP/AM flying to the USA, working Reg G0DEF in Sheffield at 1845 was also logged by Gordon along with YE50RI (Sumatra) Indonesia, working GW3AHN at 1745, and Z32RC Macedonia (QSL to PO Box 60, Stip, Macedonia) in QSO with Roy G0JAP at 1806UTC.

New reporter **Jeff Morgan GW4AYJ** of Swansea uses a Kenwood TS-850 rig and a TH3 3-element yagi at 17m. Jeff reports s.s.b. contacts on this band mostly between 1900 and 2100UTC with P40AN (Aruba Island) V21PI (Antigua & Barbuda), 9J2BO (Zambia), J24FZ (Djibouti), VU2AG (India), SU2MT (Egypt), 5X1F (Uganda), Y11EB (Iraq), and AP2JZB in Pakistan.

Another new reporter, s.w.l. **Len Stockwell** from Grays in Essex reports reception of 4X4NC (Israel) at 1851UTC, 4S7RF (Sri Lanka) in QSO with HA1CW at 1432, 8S3BG (Sweden) working 9A1BHI (Croatia), and 9A1ST Croatia working GM3UDJ at 1510UTC all with a Drake R4C receiver and a full size G5RV dipole at 7m.

Up north, (north Wales that is!) **David Ian Wright GW0VML** in Wrexham has been having a whale of a time on the bands, working some new countries. Although there's no details of equipment or the power used, he reports contacts with 7X2VXK (Algeria), at 1507UTC, SV5TS (Dodecanese Islands) at 1056, 3V8BB (Tunisia), at 1151, TA2XP (Turkey), at 1446, JY74X (Jordan) at 1636 (QSL via JY6ZZ), 9L1PG Sierra Leone at 1629 (QSL via NW8F), and SV1DHU/P (Greece), at 1845 (QSL via SV1CIB).

Finally for 14MHz there's s.w.l. **David Henry** of Aberdeen with a detailed log for late July/early August. David notes reception of OD5NJ (Lebanon) at 2308UTC (QSL via Box 70647 Beirut), 6Y5AR (Jamaica) at 2355 during the 'Caribbean Net' on 14.147MHz, ED1PAL (Pancha Island) at 2332 (QSL via EA5AEN).

David also logged JY1 King Hussein of Jordan operating the JY74Z Mount Nebo station. Special QSLs signed by King Hussein will be sent in response to reports sent to: JY6ZZ, The Royal Jordanian Amateur Radio Club, Box 2353, Amman,

Jordan. He also heard XT2CH (Burkina Faso) at 2258, and S92SS (Sao Tome & Principe) at 1720UTC, all using a Trio R1000 receiver and an indoor 20m wire antenna.

The 18 & 21MHz bands

Now it's time to look at the 18 and 21MHz bands. And 'Fifteen' has started to show some signs of life of late, perhaps it's a sign of better things to come as the summer draws to a close?

Don G3NOF has been digging out some juicy s.s.b. DX on 18MHz in the form of contacts with AP2JZB (Pakistan), at 1257UTC, D44BS (Cape Verde Islands), at 1814, HV4NAC (The Vatican State in Rome), at 1243, HK0EFU (San Andreas Island), (QSL via PO Box 464, San Andreas Island), KP2/AA1BU (US Virgin Islands) at 2106, XE3VD (Mexico) at 2300, 5A1A (Libya), at 1819 (QSL via PO Box 78665, Tripoli, Libya), 5N0GC (Nigeria), 8P6DA (Barbados), at 2308, 9Q2L (Zaire), at 1951 (QSL via PA3DMH) and 9J2JOCV (Zambia), at 1837 (QSL via JH8BKL), while on 21MHz he hooked up with VP8CRT in the Falkland Islands.

Ted G2HKU reports 18MHz s.s.b. contacts with J28JA Djibouti, (QSL via F2BU), and OD5/SP7LSE Lebanon, around 1500, W1AW (the ARRL Headquarters station in the USA), EL2NB (Liberia), A92Q (Bahrain), 4Z4SZ (Israel), and LU5GPL (Argentina), again around 1500UTC.

John G3BDQ lists c.w. contacts with SU2MT (Egypt), at 1447UTC, 9U/F5FHI (Burundi), at 1513, OH0/DL1RNW (Aland Island) at 1349 on 18MHz, with OY1G (Faroe Islands), at 1323, and 3V8BB (Tunisia) at 1353UTC on 21MHz.

Back to Jeff GW4AYJ who reports 21MHz s.s.b. contacts with CX6BC (Uruguay), CE6BTN (Chile), LU4HAL Argentina, ZP1XCP (Paraguay), and 9J2BO Zambia, all at

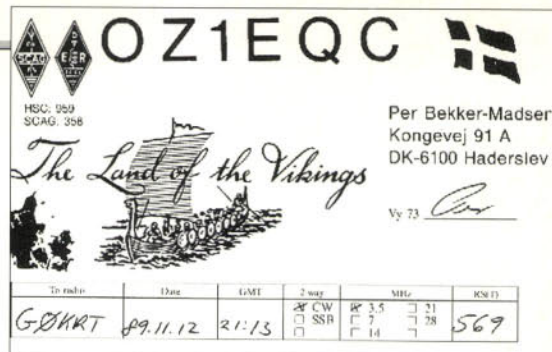


Fig. 2: An attractive design QSL card earned by GOKRT's QRP c.w. operations (see text).

around 2000UTC.

Finally, Eric GOKRT reports that his QRP reached out to YU1KJ (Serbia), at 1500, UA3RG (Russia) at 2030, and KZ1H (USA) at 2035UTC for his first US QRP contact on 18MHz.

The 24MHz Band

Just a couple of reports this month for the very under-used 24MHz band. But remember it can throw up a few surprises from time to time!

Don G3NOF dug up D3T (Angola) at 16.18UTC (QSL via ON5NT), S92SS (Sao Tome & Principe), at 1713 (QSL via PO Box 522, Sao Tome), UA2FCI Kaliningrad, at 1645 (QSL via Box 215 Kaliningrad) and 8S3BG (Sweden).

Eric GOKRT in Surrey on the other hand, reports low power contacts with DL6UNF Germany, at 1757, and EA2COV Spain, at 1953UTC.

The 28MHz band

At long last the 28MHz band has started to provide some of the longer distance contacts it's famous for! Jeff GW4AYJ reports mid-day s.s.b. QSOs with KS1L, WY2V, and KN2T all in the USA, as well as VE3XQ (Canada), and S50HQ (Slovenia) for a sole European contact.

Listener Dennis Sheppard reports sideband reception of Mike C31HK (Andorra), working DL5ARX in Germany at 0952, and the Jordanian Mount Nebo special event station JY74Z working HA4XW on 28.500MHz at 1633UTC.

Sign Off

That wraps it up for this month and it's time to sign off. My thanks to our reporters for their invaluable assistance with the column. Without your regular input it would not be possible!

Again, reports please (don't forget to provide the important full details on your equipment, antennas, times and modes), (and photographs!) and any other information for the column by the 15th of the month to: **Leighton Smart GW0LBI**, 33 Nant Gwyn, Trelewis, Mid Glamorgan, Wales CF46 6DB. Tel: (01443) 411459. Cheerio until next time.

END

Practical Wireless Listening & Operating Watch List

(All times in UTC).

Charlie Blake RS96034 listens: 0500-0700 on 7.061MHz s.s.b. with an NRD 525 RX/sloping wire antenna.

Gordon Foote G7NCR listens: 1730-19.30 & 2030-2200 (weekdays) and 1430-16.30 (weekends) 14.250MHz s.s.b. using Howes d.c. RX/long wire antenna.

Steve Locke GW0SGL operates: 2000-2100 (Sundays) 14.250MHz s.s.b. using Kenwood TS-940/TH7 beam.

Don Mclean G3NOF operates: 0930 Saturdays 3.685MHz s.s.b., and 0930 3.665MHz s.s.b. using Kenwood TS-950/trap dipole antenna.

Leighton Smart GW0LBI operates: 2000-2200 1.949MHz s.s.b. using Yaesu FT-747/and 70m long wire antenna.

Rob Mannion G3XFD listens and operates: (weekdays & weekends) 1800-18.30 3.7MHz 100w s.s.b. & 3.530/3.560MHz QRP c.w. using a KW2000B/Trio TS-120V/trap dipole/long wire and vertical antenna. Also 2300 on either 3.530 7.025MHz (c.w.) or 3.7MHz s.s.b. Occasionally on 7.025MHz c.w. between 0100-0200UTC.

To join the PW 'Listening Watch' send your details direct to **Leighton Smart GW0LBI**.

AERIAL ROTOR FOR ONLY £49.95!



AR300XL Aerial Rotor, Control Unit and Optional Alignment Bearing

Rotor unit type AR300XL and control consol. Continuous indication of beam heading. Clamps to 2in (52mm) max. mast and takes 1 1/2in (38mm) max. stub mast. 'Offset' type mounting. Vertical load carrying 45kg.

Special offer £49.95 plus £4.95 p&p. AR1201 alignment (support) bearing. Allows greater/higher head loads. Fitted above rotor. £18.95.

Plus full range of Revco Discones, air/marine antennas, rotators. * Multi-standard TVs & VCRs * Satellite Equipment * Signal Strength Meters * TV DXing Equipment * Masthead Amplifiers * Filters * Accessories

LATEST CATALOGUE

Send £1 for our latest glossy 34 page catalogue, which you will receive back by return of post.



AERIAL TECHNIQUES

11 Kent Road, Parkstone, Poole, Dorset BH12 2EH.
Tel 01202 738232
Fax: 01202 716951

THE VINTAGE WIRELESS LISTING

Published regularly, containing 100s of out of print, old and collectible wireless and TV books and magazines, and now incorporating 'The Vintage Hardware List' that contains for sale - vintage domestic radios, communications receivers, audio equipment, valves, vintage components, etc. Send six 1st class stamps for current catalogue or £3.75 for the next four catalogues.

NEW BOOKS

Eddystone Communications Receiver Data 1950-1970. A facsimile reprint of the circuit diagrams, general descriptions and some service notes for sets from 1950-1970. 50 pages. £9.50 incl. p+p.

Radar. P. S. Hall (et al.) An absorbing and informative study by authors from The Royal Military College of Science. Covers the origin and development and operation of military radar from Chain Home to Patriot, etc. Numerous photos and illustrations of equipment and its principles of operation. 170pp. Published by Brassey's Weapon Technology series at £25. Our price £12.50 p+p £2.50.

Jane's Radar and Electronic Warfare Systems 1990 - 1991. A vast volume (2nd Edition). Giving technical details of the world's radar systems, electronic warfare equipment, electronic counter measures (ECM). Ground, naval and airborne. Brand new. Published at over £100. Special offer £35 + £5 postage. (Overseas postage extra).

Jane's Radar and Electronic Warfare Systems 1990 - 1991. A vast volume (2nd Edition). Giving technical details of the world's radar systems, electronic warfare equipment, electronic counter measures (ECM). Ground, naval and airborne. Brand new. Published at over £100. Special offer £35, p+p £5. (overseas postage extra).



Chevet Supplies Limited

Dept PW, 157 Dickson Road, Blackpool FY1 2EU
Phone: 01253 751858 Fax: 01253 302979



J. BIRKETT

SUPPLIERS OF ELECTRONIC COMPONENTS

RF Power Transistors 2N5641 @ £7, 2N5642 @ £9, 2N5643 @ £14, 2N4040 @ £7.50, 2N4127 @ £8, 2N4429 @ £5, 2N5589 @ £6, BLY53A @ £8.50, BLY89A @ £8.95, £16 pair, PT31983 @ £7.
Block Paper Capacitors 10uF 370 VAC @ £3, 4uF 600vV @ 1.50, 1uF 600vV @ £1.
ZB34 Diode 400PIV 30amp @ £1.50.
UHF Power Amplifier 900MHz with pin switch, mitsubishi module M67701, no details @ £10 (P&P £2.50).
Aircraft Instrument Frequency Meter 115V, 300 to 500 cycles @ £1.50.
VHF Aircraft Transmitter a.m. type Marconi type 6400MA, 20 channel with valves 6AK5, EF91, 5686, QOV06-40A, coax change over relay @ £13 (P&P £6.50).
VHF Aircraft Transmitter-Receiver 10 channel with crystals, 21 valves, 1985 series, some info. @ £30 (P&P £2.50).
VHF-UHF Amphenol 500Q Coaxial Change Over Relay 24V ex-equipment @ £5.00.
Ferrite Rods 7 x 3/8in @ £1.50, two hole ferrite block @ 25p, FX1115 beads, 10 for 60p.
FETS 2N3819 @ 35p, MPF 102 @ 45p, J304 @ 25p, J230 @ 20p, BFW11 @ 30p, BFW12 @ 30p, dual gate MOS fets like 40673 @ 80p, BF981 @ 4 for £1.20.
Semco RF Capacitors 1000pF, 300pF both 75p each.
VHF Aircraft Transmitter a.m. type 6400MA Marconi 20 channel with valves 6AK5, EF91, 5686, QOV06-40A, Coax Change Over Relay @ £13 (P&P £6.50).
Air Spaced Variable Capacitors 15 + 15pF @ £3.50, 10 + 10 + 20pF @ £2.50, 200 + 3—pF @ £3.50, 300 + 400pF @ £3.50, 365 + 365 + 365pF @ £4.95, 500 + 500 + 500pF @ £8.95.
Ceramic Disc Capacitors 1kW 3.9, 4.7, 6.8, 9.1, 12, 15, 22, 27, 33, 39, 47, 51, 82, 120pF, all at 15p each, 2500pF 7.5kV @ 50p.
ACCESS, SWITCH and BARCLAYCARD accepted. P&P £1 under £10. Over Free, unless otherwise stated.

C.M. HOWES KITS. Available by post and for callers.



25 The Strait
Lincoln LN2 1JF
Tel: 520767

Partners J.H. Birkett
J.L. Birkett

From The U.K.

Tel: 001-203-666-6227

Fax: 001-203-667-3561



LENTINI COMMUNICATIONS, INC.

AMATEUR • SHORTWAVE • SCANNERS • COMMERCIAL
TWO-WAY • MARINE

DAILY EXPORT TO THE U.K.

YAESU, KENWOOD, ICOM, STANDARD, ALINCO

Martin Cook, N1FOC/GOTPO Sales

21 Garfield Street, Newington, Connecticut 06111-2834 U.S.A.

Visa & Mastercard Accepted

G6XBH G1RAS G8UUS

VISIT YOUR LOCAL EMPORIUM

Large selection of New/Used Equipment on Show

AGENTS FOR: YAESU • ICOM • KENWOOD • ALINCO
Accessories, ReVex/Diamond range of SWR/PWR, Adonis Mics,
Mutek products, Barenco equipment, MFJ products.

WE SPECIALIZE IN ALL TYPES OF PLUGS, ADP, ETC

★ ERA Microreader & BP54 Filter, SEM Products ★

★ Full range of Scanning Receivers ★

AERIALS, Tonna, Maspro, plus full range of base/mobile antennas.

BRING YOUR S/H EQUIPMENT IN FOR SALE

JUST GIVE US A RING

Radio Amateur Supplies


3 Farndon Green, Wollaton Park, Nottingham NG8 1DU
Off Ring Rd., between A52 (Derby Road) & A609 (Ilkeston Road)
Monday: CLOSED. Tuesday-Friday 9.00am to 5.00pm. Saturday 9am to 4pm

G6XBH G1RAS G8UUS Tel: 0115-928 0267

R.A.S. (Nottingham)

R.A.S. (Nottingham)

NEW! TU3 Antenna Tuner

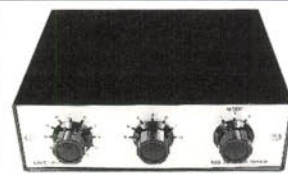

★ Ideal for receivers with a long wire Antenna on the H.F. bands, 1-30MHz.

★ Versatile! The touch of a switch gives any one of 3 different arrangements.

★ Quality case - black with printed aluminium front & back facias. Measuring only 170-140-50mm.

★ Kit complete with ALL components and hardware including pre-punched case and panels.

Price £44 Plus £4.00 P & P

Ready made £54 Plus £4.00 P & P

Send SAE for details of our full range of kits or call 0115 938 2509



LAKE ELECTRONICS

7 MIDDLETON CLOSE, NUTHALL, NOTTINGHAM NG16 1BX

(Callers by appointment only)



OSC MODULE. Marconi small unit 30c/s to 550Kc direct cal with fine tune o/p var 0 to 2v mains with circ. £32. RADIO KIT. Incl Sorno CQM630 boot mt RT 68/88 Megs FM 10 watt 12v plus accs kit C/Bx cables Ae etc. good cond with info, supplied with crystal module for 3 chan (12 chan unit). £48. ARC-52 A/C UHF T/Rx. 225/400 Mc/s in 100Kc chan 20 watts AM with control box, most of info, for 24v DC. £85. Control box only £24.50. COAX LEADS. BNC 50 ohm RG58 8ft NEW 2 for £4.50. COUPLERS SPINDLE. Insul & flex 3/4" NEW 10 for £6.50. UHF Tx SUB ASS. Nom freq 1.1Gz as 3x 2C39 valves in cavities £32. CHASSIS ASS. Spare C42 Tx PA & Amp unit with part Rx & Cal unit nom freq 36/60 Mc/s with circ. £28. CONDS PHOTO FLASH. 215 Uf at 2.5Kv Pk rapid discharge. £25. FREQ DIVIDERS. Rcal mains will extend range of freq counters up to 600 Mc/s as 10 & 100 divide 10 Mill /V I/P tested with book. £34.50. BEACONS. Sarbe Mk.5 as beacon on 243 Mc/s & two way RT on 282.2 Mc/s reqs 12v sets only no Ae. £28 per pair. TURRET ASS. Osc unit with 5 coils 3/300 Mc/s (9 posis) with circ & valve. £17.50. RTTY & DATA LINK T.S. Two part unit see list. £65. H.U.DS MK.3A With int EHT unit req 400c/s. £65. PUMP. Water fluid 110v max flow 50L/min 1/2" BSP 60 watts new. £48.

ABOVE PRICES ARE INCLUSIVE GOODS EX EQUIP UNLESS STATED NEW.

A. H. SUPPLIES

Unit 12, Bankside Wks, Darnall Road, Sheffield S9 5HA
Tel: 0114-244 4278

WANTED: SECONDHAND GEAR

★ TOP CASH OFFERED ★

TEL: 01708 374043

Call Dave G3RCQ Mobile: 0850 320134

G3RCQ Electronics

SPECTRUM COMMUNICATIONS

Factory and Shop at Unit 6b Poundbury West Estate, Dorchester, Dorset DT1 2PG. Phone and Fax 0305 262250

Opening times: 9-1 2-5 Tue-Fri, 9-1 Sat. Closed Sun & Mon.

A WIDE RANGE OF QUALITY KITS & READY BUILT MODULES

TRANSVERTERS

25W output, >15dB RX gain	Boxed kit	Boxed built
28MHz 10-500mW drive version, TRC2-10L, TRC4-10L, TRC6-10L	£138.00	£187.50
0.1-10mW drive version. TRC2-10bL, etc.	£145.75	£203.50
144MHz 2.5W drive version, TRC6-2iL, TRC4-2iL available built only,	£145.75	£203.50
50MHz 2.5W drive version, TRC2-6iL, TRC4-6iL,	£145.75	£203.50

LINEAR AMPLIFIERS

3W in 24W out, RF switched

50MHz TA6S1, 144MHz TA2S1	£56.25	£70.50
As above plus preamp TARP6S, TARP2S	£72.75	£98.25

SPEECH PROCESSOR

Amplitude and frequency processor SP444E	£26.25	£40.00
--	--------	--------

RECEIVE PREAMPS

20dB gain, 100W handling

RP2S, RP4S, RP6S, RP10S	£28.50	£39.00
Masthead versions RP2SM, RP6SM	£39.50	£49.00

TRANSMIT TONES

	PCB kit	PCB built
1750Hz repeater toneburst, AT1750	£5.00	£7.50
Piptone, like APOLLO beep, PT1000S	£7.00	£10.50
Keytone, morse dah-di-dah, KT1000	£10.25	£17.50

COMMUNITY BROADCAST EQUIPMENT

87.50-108MHz synthesized 0.8W transmitter CTX100V	£185.00
0.5W in, 25W out broadcast amplifier TA100C3	£110.00
87.50-108MHz 'Slim Jim' style aerial	£30.00
48.475MHz 1W link transmitter LTX48	£180.00
48.476MHz link receiver LRX48	£150.00
0.5W in, 25W out link amplifier TA50C3	£110.00
199.7MHz 800mW link transmitter LTX200	£200.00
199.7MHz link receiver LRX200	£150.00

PLUS MANY OTHER KITS FOR AMATEUR AND CB RADIO

VAT & P&P inclusive prices. Send SAE for free Full Catalogue.



Most advertisements are legal, decent, honest and truthful. A few are not, and, like you, we want them stopped.

If you would like to know more about how to make complaints, please send for our booklet: 'The Do's and Don'ts of Complaining'. It's free.

The Advertising Standards Authority.

We're here to put it right.

ASA Ltd., Dept. Z, Brook House, Torrington Place, London WC1E 7HN.

This space is donated in the interests of high standards of advertising

Practical Wireless, November 1995



SureData

PO Box 314, Edgware, Middx HA8 6ED
Tel/Fax 0181 905 7488 (24 hours)



Second User PCs



♦ I have a large range of 386 and 486 second user PCs ideal for amateur radio, student or family.

♦ If you want a new PC, Monitor, System Unit, Hard Drive, Mother Board.

♦ Give me a call and I'll be pleased to advise you as to the best system configuration and price to meet your needs and pocket.

♦ If you already have a PC and want to upgrade it phone me for a quote.

♦ 73's JOHN G3TLU

SOFTWARE FOR THE RADIO AMATEUR

Europe's leading distributor of Amateur Radio, Engineering and Communications Shareware/PD programs for the PC - 100's of related program disks - FREE CATALOGUE

Transmit and Receive

SSTV - FAX - RTTY - CW - AMTOR

This BRITISH communications interface for the PC is built into a 25 way 'D' Connector. Comes complete with Interface cable & 3 software packages. As featured in HRT, PW & Ham Radio Japan. Only £49.99 plus postage

VENUS ELECTRONICS

26 Pevensey Way, Frimley Green, Camberley
Surrey GU16 5YJ Tel/Fax: 01252 837860

Adapt-A-Mast

- Lifts to 25ft • Wall mounting
- Complete with all brackets, cable and winch
- Accepts 2in stub mast • Adaptable to tilt-over
- Available bare steel or hot dip galvanised BS729
- Simple four bolt installation

Call (01505) 503824


or write to

TENNAMAST SCOTLAND

81 MAINS ROAD
BEITH, Ayrshire KA15 2HT



Also Eurocard

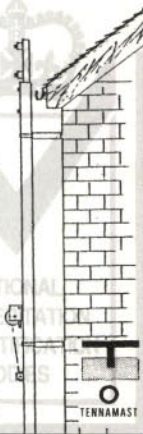

SERVICE MANUALS & TECHNICAL BOOKS

Available for most equipment, any make, age or model.
Return the coupon for your free catalogue

Mauritron Technical Services (PW)

8 Cherry Tree Road, Chinnor, Oxon OX9 4QY.

Tel: 01844 351694 Fax: 01844 352554

Please Forward your latest catalogue for which I enclose 2 x 1st class stamps or £3.50 for the complete service manuals index on PC disc plus catalogue.

NAME

ADDRESS

.....POSTCODE.....

Photocopy this coupon if you do not wish to cut the magazine



Valve & Vintage

Ben Nock G4BXD, although already busy writing for the magazine, has agreed to 'help out' in the PW 'wireless shop'. So, we've found him just the job...looking after the valved and vintage amateur radio equipment and military radios!

I was most pleased to be asked to contribute to 'Valve & Vintage'. My interest in valved and vintage items are only surpassed by my interests in the British hop growing industry and the final product in the pint (not metric) glass!

Hopefully I can share a bit of my enthusiasm with you and show that the valve is not totally dead! In fact, in the words of Eddy VE3CUL... "Real radio still glows in the dark". I think that's an apt slogan for this column!

To start off, I'm going to look at one of the nicest looking older receivers often seen at the rallies - the Heathkit RA-1 amateur bands receiver. It's a very pleasing, straightforward set supplied, both as a kit of parts and an assembled receiver, in the 1960s by the Daystrom Company in Gloucester.

Six Bands

The RA-1 has a six band coverage of the 1.8, 3.5, 7, 14, 21 and 28MHz amateur bands. It provides the user with a.m., c.w. and s.s.b. reception.

An internal crystal calibrator was fitted. And it was also provided with a half lattice crystal filter in the i.f. amplifier chain. This ensured a high degree of accuracy and a fairly good selectivity factor given the average price of these sets.

The RA-1 uses eight valves and had a quoted sensitivity of $2\mu\text{V}$ for 10dBs/n ratio or better. On the specifications Heathkit quoted 40dB or better image rejection.

On the audio side, the receiver had an internal 3Ω speaker, and there was a useful 2W of audio output available. Headphone output,

to match 600Ω , was available via a jack socket.

Dimensions of the receiver are approximately $13 \times 11 \times 6$ in and it weighs in at 18lbs. Mains power consumption is 50W.

If bought originally as a kit, the RA-1 components would have included 65 capacitors, 48 resistors, the valves, the ready-built 'front-end', nuts bolts, the familiar green & white case, wire and dial string. In fact everything needed to complete the kit was provided by



Fig. 1: The Heathkit RA-1 amateur bands only communications receiver.

Heathkit.

Large Dial


The large illuminated, rectangular tuning dial provides an 'easy-to-read' analogue frequency scale which is some 5in long. A two speed slow-motion drive arrangement allows both speedy sweeping across a band and also the gentle tuning required to

resolve s.s.b. transmissions.

It must be said though that the tuning on the RA-1, while being adequate for the time of manufacture, is now dated. It lacks the smoothness that operators have all come to expect in modern equipment with digital displays.

On the front panel, the AF and RF gain controls provide adjustment. There's also the main tuning control knob, the **Band Switch**, **Noise Limiter** control, **BFO On/Off** switch, **USB/O/LSB** switch, **AVC On/Off** switch. Additionally, there's a push to **Calibrate** switch, a **Calibrate**

Fig. 2 Annotated photograph showing locations of inductors and capacitors referred to in Table 1 for alignment of the 'Electroniques' ready-built 'front-end' in the Heathkit RA-1. Photograph shows the underside of the unit, (the inductors to be adjusted are accessible from the corresponding locations on the upper side). Please note the instructions (and warning regarding L3, 4, 5 and 6) in Table 1.

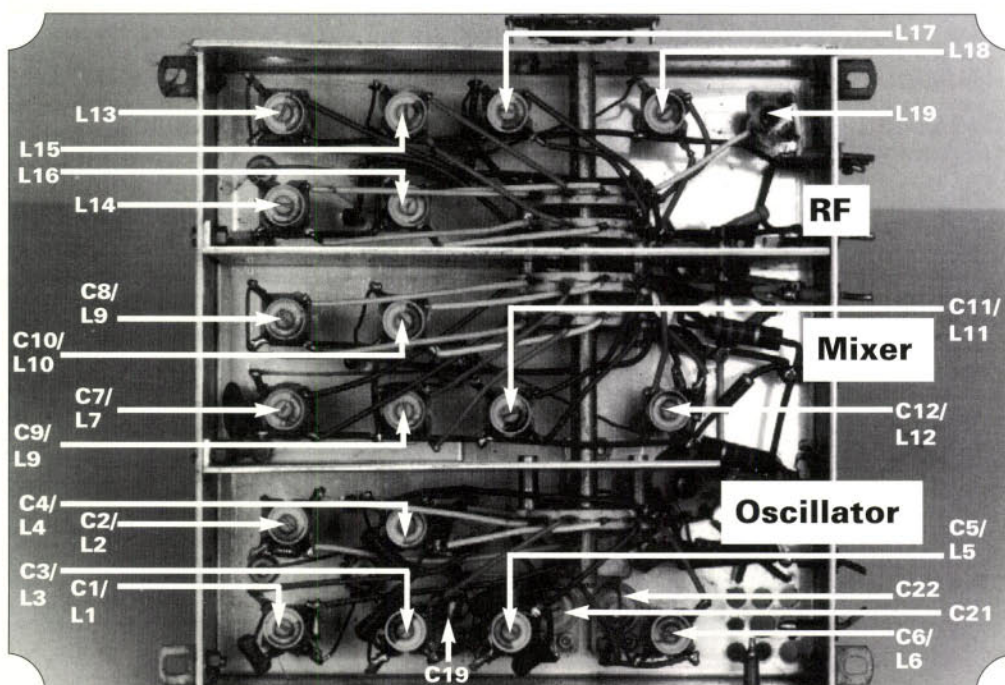

Adjustment and finally an Antenna Trimmer.

The RA-1's headphones socket is mounted on the front panel for easy access. Other features including **S-Meter Adjust**, and the 75Ω antenna input socket, and the speaker terminals, are mounted on the rear panel of the receiver case.

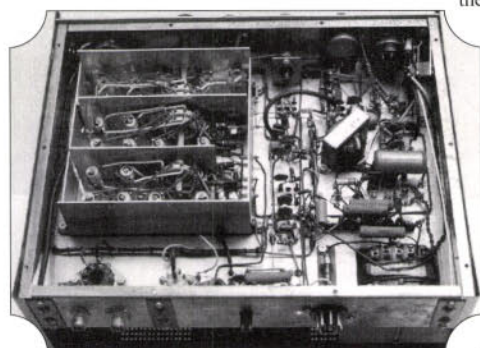


Fig. 3: Underside view of the RA-1 chassis. The 'Electroniques' r.f. 'front-end' (supplied as a ready-built and aligned unit) can be seen dominating the left-hand side of the photograph.

Nice Feature

A further nice feature is that the knobs are big enough. They're laid out well, so as to be easy to operate. There's no fiddling with 'teeny weeny' little things cramped so close together only infants of six months and under can reach them!

Heathkit also included provision for muting the receiver, when used with a transmitter for example. And in the past, I've used this receiver with several transmitters, such as the KW 'Vespa', with quite good results.

There is also provision for attaching a device called a 'Q' multiplier to the i.f. stages to increase the selectivity and gain. Although I have never had one of these they're quite simple in operation and work by having a stage which can be brought into controlled oscillation (or just before 'the threshold' of oscillation) dramatically improving selectivity and gain.

An 8-pin octal plug on the rear of

the RA-1 provides for the a.c. input and d.c. h.t. and heater 'take off'. This was a useful feature for supplying v.h.f. and u.h.f. converters and other accessories in the days when they too were valved.

Crystal Calibrator

The crystal calibrator unit, (although the adjust and push switch were already ready fitted to the main receiver) came as an optional extra. It was mounted inside the set.

In effect the crystal calibrator consisted of a small unit housing a 6AU6 valve and a 100kHz crystal with associated components. It was plugged into a holder mounted on the receive chassis.

Front -End

The ready-built and aligned 'Electroniques Quailpack' 'front-end' unit used on the RA-1 was provided with an r.f. amplifier stage using an EF183 valve. The mixer uses an ECH81 as the mixer and combined local oscillator.

A further EF183 was employed as the 1st i.f. amplifier. An ECF82 triode pentode is used as the combined 2nd i.f. amplifier and beat frequency oscillator (b.f.o.) with the triode section of the valve acting as oscillator.

Noise limiting on the RA-1 is provided by an EB91 double-diode valve. An ECL86 triode-pentode is used as both audio preamplifier and output stage.

Power is provided by an EZ81 rectifier valve and voltage stabilisation is carried out by an OA2. (Fortunately, all the valves used in the RA-1 are still available today at rallies or through specialist suppliers).

Semiconductors do appear in this

predominately valved design! They appear in the shape of two OA81 semiconductor diodes which are used as audio detector and automatic volume control (a.v.c.) rectifier.

Intermediate Frequency

The local oscillator on the RA-1 runs on the high side of the antenna frequency to produce a 1.621MHz intermediate frequency. For example, tuning the receiver to 3.6MHz, the oscillator will be on 5.221MHz.

A pair of quartz crystals form what's termed a 'half lattice' filter. This is in circuit between the mixer output and the first i.f. amplifier.

Used as the main or even backup receiver, the RA-1 is very easy to operate and tune. In use the b.f.o. is switched between upper sideband (u.s.b.) and lower sideband (l.s.b.) thus making it easier for newcomers to resolve s.s.b. signals.

The crystal filter provides good selectivity, even on the crowded 7MHz band. And although the RA-1 does lack the newer WARC bands (10, 18 and 24MHz) with the supply take-off at the rear, a small one or two valved converter could easily be built to provide this facility.

Aligning The Receiver

Aligning the receiver requires a calibrated signal generator capable of providing an amplitude modulated (a.m.), signal and a few plastic trimming tools. The correct tool should be used as this will reduce the risk of breaking the coil cores and causing further hassle!

The RA-1 alignment can be done by 'ear'. Alternatively it can be carried out by measuring the voltage across the speaker terminals with the speaker connected.

During the various steps or stages of alignment, the dial should be placed at the required spot. Then the oscillator brought into line by adjusting the L (inductor or coil) or C (trimming capacitor). The diagram, Fig. 2, indicates the relative position of each inductor and capacitor in the 'Electroniques' front end.

The output of the signal generator should be progressively reduced to avoid overloading the set and to give you the best 'peak' on each adjustment. Repeat the alignment at each end of each band until no further improvement can be obtained. (see Table 1).

There was a similar general coverage receiver, the RG-1, which

was available around the same time as the RA-1. Both sets used virtually the same components and were identically styled.

General Coverage

The RG-1 employed the general coverage version of the Electroniques' front-end to provide 500kHz to 30MHz tuning, employing a much larger three section variable capacitor rather than the much lower value 'bandspread' version used in the 'amateur bands' only unit.

Despite being on the market for 30 years, the RA-1, and the RG-1 for that matter, make ideal introduction receivers. They are suitable for beginners to the hobby whilst not costing the more normal 'second mortgage'.

I must provide one word of caution though! As the sets were mainly bought as kits (around £40 in the late 1960s) the state of the second-hand purchase does rely a lot upon the soldering skills of the original builder. But having provided the warning, I think any major faults should have been solved long ago.

Personally I think the RA-1 does look very nice on the shack shelf. I've had hours of fun with this set, it's a receiver you can feel at ease with without being intimidated by dozens of knobs and functions.

Although Daystrom, the UK subsidiary of Heathkit, has ceased manufacturing amateur radio equipment all is not lost. A company called Cedar Electronics, Tel: (01242) 602402, may be able to help by having the odd spares for the RA-1.

Interesting Items

In future editions of 'V&V', when it's my turn to 'man the shop', I hope to cover some of the more unusual and interesting items of amateur and military equipment. And of course this will be done along with the better known valved equipment.

And of course I'll be most pleased to hear from anyone with an interest in the vintage aspect of radio. I would also welcome photographs and details of anything you would like to share with other enthusiasts.

Contact me directly on packet radio via GB7BBS, #28.GBR.EU or on the 'landline' on (01562) 743253. So, I'm looking forward to meeting you again when it my turn to open up the 'shop' in the February issue.

Table 1

Band	Sig Gen Setting	Alignment Details	
		Osc. Adjust	Mixer & r.f. adjust
1.8MHz	1.7MHz	L1	L7 and L13
	2MHz	C1	C7 and antenna trim
3.5MHz	3.5MHz	L2	L8 and L14
	4MHz	C2	C8 and antenna trim
7MHz	7MHz	C19	L9 and L15
	7.3MHz	C3	C9 and antenna trim
14MHz	14MHz	C20	L10 and L16
	14.4MHz	C4	C10 and antenna trim
21MHz	21MHz	C21	L11 and L17
	21.5MHz	C5	C11 and antenna trim
28MHz	28MHz	C22	L12 and L18
	30MHz	C6	C12 and antenna trim

* Note: The cores of L3/4/5 and 6 must not be adjusted.

VHF REPORT

This month David Butler G4ASR takes a look at long distance communications on the v.h.f. bands and how you can join in the 'DXfun'.

Contacting stations in far-away places 'working DX' is one of amateur radio greatest challenges. Especially if you choose to do it on the v.h.f., u.h.f. or s.h.f. bands.

When these bands open up for DX they can produce some truly exotic signals. It can be truly fascinating! If you start to get interested you could soon be hearing the raspy sound of signals reflected back from an aurora. Then there's the stunning strength of Sp-E signals or the startling bursts of s.s.b. or high speed c.w. scattered from meteor trails.

And one day, if you really go for it, you could be hearing your own signals echoing back from the moon. The sky's **not** the limit with v.h.f.!

To work DX to a great extent you're very much dependent on prevailing conditions. Propagation is by far the most important factor effecting whether you can work a particular station or not.

If there is no propagation path open to that station, the sad fact is that site, equipment and operating skill are all to no avail. On the other hand, when the band is wide open, people can work all kinds of DX with minimal equipment.

So be aware of the various propagation modes. And make good use of them when they occur.

Uncluttered Horizon

Another important factor on the v.h.f., u.h.f. and s.h.f. bands is your location...a clear, uncluttered horizon is far more important than absolute height. Even if you live in a poor site, don't despair!

Choose your band and propagation mode appropriately. Remember that the lower v.h.f. bands (50 and 70MHz) are less affected by a screened location.

If your site really is in a bottomless pit you may still be able to work the world using amateur satellites or even moonbounce. A quiet environment with enough space for the antenna is more important for these modes of propagation.

The 50MHz Band

One of the easiest v.h.f. bands on which to work DX is the 50MHz

band. Antennas can be relatively small and you don't need lots of power either.

I've already mentioned that the most important feature that enables DX to be worked on any band is the existence of suitable propagation. At this point in the sunspot cycle the best DX opportunities on the 50MHz band comes via Sp-E.

Unfortunately the Sp-E mode only occurs for about three months in the summer and about two weeks in the winter. So for the rest of the year, apart from occasional auroral openings, the band can remain fairly quiet.

Of course the real DXer knows that troposcatter and meteor scatter can fill in the gaps. But it takes a fair bit of dedication at both ends of the path to succeed in these modes.

Ionospheric F2-layer propagation is used by h.f. operators to contact stations around the world. When all the factors are favourable the maximum usable frequency (m.u.f.) extends to 50MHz and occasionally to 70MHz.

Under the m.u.f. conditions are favourable the 50MHz band resembles that at 28MHz. Sometimes signals can be very strong because ionospheric absorption is lower at v.h.f. Factors that determine the level of F2-layer ionisation are the solar cycle, the season of the year and the time of day.

Solar Cycle

The best time for F2-layer propagation is during the peak of the 11-year solar cycle, commonly known as sun spot maximum. Regrettably I must inform you that you have a few years to wait, as sunspot minimum is forecast to take place during the summer of 1996.

The good news however, is that astronomers at the California Institute of Technology say they have identified the first new sunspot group in the next sunspot cycle.

Early in the 11-year cycle, sunspots appear rarely and at relatively high solar latitudes of around 30 to 35°. The spots then increase in number and appear at lower latitudes until sunspot maximum is reached.

After the peak in activity the number of sunspots slowly decline.

They then appear ever closer to the sun's equator until they reach a relatively quiet phase called sunspot minimum.

The sun has been in a quiet period through much of 1994-95 with a few spots showing up near the equator. The new sunspot group which became visible on August 12 appeared at a solar latitude of 21° and its magnetic polarity was opposite to that seen over the last decade.

Scientists reported that they were expecting an early beginning to solar cycle 23, but not this early. (Incidentally, there's always an overlap period during which spots from both the old cycle and the new cycle appear).

The month of the sunspot minimum is the month in which the smoothed 12-month running average sunspot number (counting sunspots from both cycles) is a minimum. Sunspots in the new cycle however should rapidly become more common and reach a high level of activity in 1998 or 1999.

So there's plenty of time to get your 50MHz equipment ready for the real DX!

Season Good

I mentioned earlier that Sp-E occurs in the summer. This year the season was particularly good with openings virtually every day during much of May, June and July.

I'm pleased to record that I actually predicted this would happen (April issue) and is based on the fact that Sp-E seems to be more prevalent during the period of sun spot minimum. So theoretically next year could be even better.

A report from **Geoff Fowle 2E1CSR** shows what can be accomplished on the 50MHz band with low power and a small antenna. He reports that he's had incredible results running less than 3W into a home-made dipole only 3m above ground.

This year was Geoff's first Sp-E season and he was very pleased to work a total of 19 countries. Some of his DX contacts, both on s.s.b. and c.w. I'm pleased to say, included HV3SJ, IA5/OESD, OY9JD, 4U0ITU and 4X1IF.

Some other European and

African DX as reported by the UK DX Cluster this summer included: G4AFJ/TF/M, CN2JA, D44BC, EH8BPX, EH9IE, HV4NAC, OX3LX, S0RASD, S07URE, 4U/KC0PA, 4K6D, 5T6E and 5T5BN.

The Cape Verde activity, from the QTH of D44BC (HK76), was organised and run by **Geoff Brown GJ4ICD**. In total he worked twenty-six DXCC countries including contacts with FG5BG and V44KA0.

It's expected that D44BC will continue where Geoff left off. That's because a TS-60 transceiver and 50MHz antenna were left for future operation.

Transatlantic Openings

Last time, I took a look at transatlantic openings on the 50MHz band and presented some theories about how they occur. This year's results surpassed all expectations with a total 18 days when the path to North America opened up. (And that was just to the UK!)

According to **Emil Pocock W3EP** the 50MHz band was open to Europe on no less than 37 occasions during the summer! For those that missed them the UK transatlantic openings occurred on June 7, 12, 13, 16, 18, 19, 20, 21, 22, 27, July 2, 3, 4, 5, 6, 7, 8 and 10.

Although there were many openings, signals were generally fairly weak and most activity was therefore carried out on c.w. During these openings only the better equipped stations got consistent results.

So, those running low power and a small antenna had a frustrating time trying to make it across. In previous years, the transatlantic signals have been very loud and much of the activity has been on s.s.b.

Openings were widespread with every call area in the USA, apart from W6 and W7, being worked at some time or other. Stations in Canada, VO, VE1, VE3 and VE9, were also contacted as were FP5EK, KP4EIT, KP4EOR, YV4AB, YV5ZZ and ZF1DC.

The distances involved were fairly long. For example, in an opening on July 3 between 1330-1630UTC, I contacted 20 USA

stations at distances up to 7000km.

One of the best openings occurred on July 7 when North Americans were worked for over 12 hours. The opening extended from Venezuela in the south and Greenland in the north and was probably the biggest 50MHz transatlantic Sp-E event of the decade.

Records Of Openings

Incidentally I've kept records of 50MHz transatlantic openings from the UK since 1984. Contacts have been made every year except in 1986 when no stations were heard.

My data indicates that the best conditions during the recording period occurred in the summers of 1987, 1988 and 1995. Between 1984-1995 a total of 25 openings were observed in the month of June and 14 during July.

Meteor Scatter

The meteor scatter (m.s.) mode of communication works by scattering v.h.f. signals from the ionised trails of meteors. Although the reflections, or bursts, are generally quite short, contacts can be made with similar enthusiasts up to 2200km away.

The best time for m.s. is during a major shower. One of these showers, the Perseids, occurred recently during August.

In a previous issue I predicted that the peak of this year's shower would occur between 1500-1800UTC on Saturday August 12 and 0400-1000 on Sunday August 13. This assumption was based on the fact that the earth intercepts the shower orbit every 365.25 days.

So, by simply adding six hours to the date and time of the previous year's radio peak, a fairly accurately prediction for maximum meteor activity can be made. From reports received it seems that this year's Perseids shower was not particularly good and the maximum was difficult to find.

However, many operators suggested that reflections were quite good during the afternoon of August 12 and during the early morning of August 13. Some good DX was worked on the 144MHz band from the UK.

Among the stations noted on the s.s.b. calling frequency were CT1WW, EA3DUY, ER/LZ1KW, HA3UU, HB9FAP/P, I8MPQ, LA8KV, LY3BF, LZ2UU, OH1AYQ, OK1KF, SM3JLA, SP9EWU, S50C, YU1VG and 9A1CCY.

Interestingly Ray James **GM4CXM** (I075) reports that on August 12 his packet radio system received a burst from an IW3 station. Nothing surprising about that **except** that it was on 433.650MHz!

Ray was using a 13-element Yagi beaming in the correct direction so it may have been possible. Did anyone else have similar results with their packet radio equipment?

Moonbounce Contest

You've still got time to participate in this year's ARRL e.m.e. 'moonbounce' contest. The second leg of the contest will be held during the weekend November 4-5 and provides a great opportunity to work some of the larger e.m.e. stations.

The annual contest attracts a lot of interest and often stimulates DXpeditions and other special stations. It can be particularly interesting to the first-time listener although it has to be noted that the hurly-burly of a contest is not necessarily the best way to start your e.m.e. activity.

The accepted operating procedures are often shortened between stations with good signals. And this may cause confusion to anyone not fully conversant with the correct procedures.

If you want to cut corners with e.m.e. procedures you need to be an experienced 'moonbouncer' and require no lessons from me. But if you're a beginner or you want to be absolutely sure of making the contact, then stick to the procedures. Details of these can be found in *The VHF/UHF DX Book* (ISBN 0-9520468-0-6).

Fighting Chance

If you can get at least 100W of c.w. at the antenna (note at the antenna!) and have a sensitive receiver you'll be in with a fighting chance of making your first contact via the moon. Of course much depends on the antenna and I don't recommend you use anything less than a yagi with a boom length of 3λ at 144MHz.

On the 430MHz band, because of the higher path loss, a simple array of four 6λ Yagis should be sufficient. Incidentally some of you may not be conversant with the idea of measuring boom lengths in wavelengths.

The symbol λ (Lambda) indicates wavelength. So a Yagi with a boom length of 3λ on the 144MHz band is 3 x 2m long or 6m long.

In the other example given the 430MHz Yagis will be 6 x 70cm or 4.2m long. Finally, don't waste your valuable antenna gain, receiver sensitivity and transmit power by using poor coaxial cable! Use a hardline cable such as Andrews LDF4-50 (or LDF5-50) and keep it as short as possible with a minimum number of connectors as possible.

Radio Telescope

Last month, I mentioned that the Toronto VHF Society will be active in the e.m.e. contest with a 46m diameter radio telescope dish antenna. The group, using the



You could 'bank' on good results if you had e.m.e. access to Jodrell Bank radio telescope!

callsign VE3ONT, will be operating on 144.100 and 432.050MHz.

On both bands they will be listening for replies up to 10kHz higher in frequency. In order to maximise your chances of making a QSO make use of the entire receive window.

In previous years the best weak-signal successes have been well away from their transmit frequency. On the 144MHz band the group plan to be QRV from 2135UTC on November 4 to 0910 on November 5 and again on the same day between 2205-2400.

Operation on the 430MHz band is scheduled between 0000-0805UTC on November 4. However, you should note one important fact. If you live in the UK the moon will be **below the horizon** for much of this time!

At my QTH (and for most of the UK for that matter) the moon sets at 0330UTC on November 4 and rises again at 1530. It will then remain visible for e.m.e. communication until it sets at 0430 on November 5. At 1600UTC it rises again allowing another eight hours of contest activity before the end of the competition at 2400.

If you send me an s.a.e. I'll provide you with a list of azimuth and elevation bearings for use during the e.m.e. contest. Don't forget to give me your full six figure locator. And

for good measure I'll throw in a copy of the relevant e.m.e. procedures. I can also accept requests via packet radio and the Internet.

Deadline Time

Deadline time again. And if you've made any DX QSOs recently or just wish to pass on any news...please let me know about it.

As usual send details (to reach me by the end of the month) to: **Yew Tree Cottage, Lower Maescoed, Herefordshire HR2 0HP**. You can also contact me via packet radio @ **GB7MAD**, the **DX Cluster @ GB7DXC** or the **Internet davebu@mdlhr1.igw.bt.co.uk**. Alternatively you can telephone me on **(01873) 860679**.

Cheerio for now and Good DX on v.h.f. and u.h.f.!

END

BITS & BYTES - COMPUTING IN RADIO

Mike Richards G4WNC has all the latest computing news and views for you including details of Internet sites to look out for.

Many of you who wrote to me during August with either questions or orders will have suffered much longer delays than usual. This was due to an unfortunate clash between my holidays, publishing deadlines and a particularly healthy response to the readers special offers!

As a result we were inundated with mail which took us into early September to deal with. So, by the time you read this, normal service should have been resumed. I hope I didn't cause too much inconvenience - we'll have to plan our break differently next year!

Demon Service

Demon Internet of Finchley have been a major supplier of dial-up Internet service and have become best known for their low-cost full access at just £10 per month. The only snag with the service was the rather cumbersome software that was supplied to IBM PC users.

Demon have now corrected the shortcoming with the launch of a brand new Windows software package. The package comes complete with a built-in dialler and the important applications such as Netscape WWW browser, mail, news, FTP and TelNet.

The use of a fully integrated package with a simple start-up means that all the family can get on the Internet. Put this together with the new weekend 'phone rates and the Internet really starts to become attractive.

In addition to the new software, Demon have also launched a new glossy magazine for its customers. As well as covering Demon related topics, the magazine provides lots of tips and information for UK Internet users. It looks as though they're shaping up to give CompuServe some stiff competition.

For more details contact **Demon Internet Limited** at Gateway House, 322 Regents Park Road, Finchley, London N3 2QQ. Tel: 0181-371 1234 or E-mail: internet@demo.net

Interference Filters

Hugh Galt EI2IH of Shankill has recently returned to amateur radio

after an absence of 25 years. Unfortunately, Hugh is plagued by severe QRM particularly on the 1.8 and 3.5MHz bands.

The source of the interference is his 10 year old burglar alarm. He's taken a number of steps to reduce the noise on the higher bands by using ferrite clamps on the sensor leads. However, this has had little effect on 1.8 and 3.5MHz.

He's considered replacing the alarm system, but all the neighbours have the same system so he would be left with their noise. Other than wanting general help, he asks if a d.s.p. based audio filter is likely to help.

Although elimination at source is always the preferred way to overcome interference problems, a d.s.p. filter should help, particularly as Hugh's main interest is c.w. working. Modern d.s.p. filters can produce very narrow bandwidths with minimal ringing that can cut through a lot of the noise.

The noise reduction can be further enhanced by using a d.s.p. filter with a denoise algorithm. This will provide a significant random noise reduction whilst leaving the coherent tone of the c.w. signal intact.

The trick is to try before you buy, preferably in your home location - but you need a friendly local dealer to do that. If anyone else has suffered and cured interference from intruder alarms perhaps you'd write to me with the details.

Internet News

The Internet continues to expand at an amazing rate and readers have sent in a number of interesting locations for you to explore. I'm also busy putting together my own home page on the BBC Networking Club's WWW site - details later.

Those with a particular interest in d.s.p. work should find the DSP WWW home page very useful. This can be found at

<http://www.dspnet.com/welcome.html> My thanks to Derrick Darlow for finding this one.

Wayne Dillon G0JJQ from Stanmore is a regular user of the Internet to support his radio activities and has sent in details of his favourite sites. One very good starting point

that provides links to many other pages is the Yahoo entertainment, amateur radio page this can be found at:

<http://www.yahoo.com/yahoo/Entertainment/radio/amateur-radio/>

If you're a keen DXer then the DX info page is a must. This provides details of PacketCluster spots, DX mailing lists and full details of forthcoming DXpeditions. The location for this site is

<http://ve7tcp.ampr.org/DX/>

This same site is packed with other amateur radio information including an archive of ARRL DX Newsletters. These are to be found in the directory <http://bulletins/dxnl>

If you're out of bookshelf space for all those call books there's another WWW site that contains a mass of QSL information. The location is <http://www.systemtechnik.tu-ilmeneau.de/ham/ham.html> Other interesting sites to watch out for are:

EI5DI home page (SuperDuper contest log and other programs):

<http://www.iol.ie/~okanep/>

GJ4ICD's Ham Radio Pages

(general info):

<http://user.itl.net/~equinox/>

KA9FOX home page (contest and DX information):

<http://www.infoanalytic.com/ka9fox>

On-Line Amateur Radio

Magazine:

<http://www.amateurradio.com/index.html>

QRP Radio Home Page:

<http://www.acs.ncsu.edu:80/HamRadio/HF/grp/>

If you have any details on particularly good sites please E-mail me the details.

That's it this month, however if you're planning to attend the Leicester Amateur Radio Show over the weekend of October 20 & 21st why not call at the PW stand where I'll be running a combined 'Bits & Bytes' & 'Decode' Clinic? So until then 'happy computing' and keep sending your letters to me Mike Richards G4WNC, 'Bits & Bytes', PO Box 1863, Ringwood, Hants BH24 3XD. CompuServe: 100411, 3444; Internet: mike.richards@bbcnc.org.uk

Special Offers

This month I've made some changes to the way I distribute software for special offers. The present system is proving very time consuming as I have to custom build each disk with the required software.

I've also had problems with reader's supplying faulty or unformatted disks or just not enough disks. So, I've put together a set of four disks with the most popular software combinations.

To speed things up, I will now supply the disks! Please allow up to two weeks for delivery.

IBM PC Software (1.44Mb disks):

Disk 1 (Order Code **DK1**) - JVFAX 7.0, HAMCOMM 3.0 and WEFAX 3.0

Disk 2 (Order Code **DK2**) - DSP Starter plus Texas device selection software.

Disk 3 (Order Code **DK3**) - Ultrapak 2.1 and NuMorse

Disk 4 (Order Code **DK4**) - Mscan 1.3 and 2.0

Printed Literature:

Beginners Utility Frequency List (Order Code **BL**)

Complex Signals Utility Frequency List (Order Code **AL**)

Decode Utility Frequency List (Order Code **DL**)

FactPack 1 - Solving Computer Interference Problems (Order Code **FP1**)

FactPack 2 - Decoding Accessories (Order Code **FP2**)

FactPack 3 - Starting Utility Decoding (Order Code **FP3**)

FactPack 4 - JVFAX and HAMCOMM Primer (Order Code **FP4**)

FactPack 5 - On the Air with JVFAX and HAMCOMM (Order Code **FP5**)

FactPack 6 - Internet Starter (Order Code **FP6**)

For the printed literature just send a self addressed sticky label plus 50p per item (£1.50 for four, £2.50 for 7 and £3.00 for 9). For software send £1.00 per disk (£1.75 for 2, £2.50 for 3 or £3.00 for all 4) and a self addressed sticky label (don't forget I provide the disk!).

END

BROADCAST

ROUND-UP

Peter Shore rounds-up all the latest news from the broadcasting world.

Wayne Dillon G0JJQ has written to me from Stanmore in Middlesex with news of two computer programs he thought might be of interest to readers of *PW*. Wayne told me that he is a keen amateur operator, but also enjoys listening to the broadcast bands, and had been looking for a computer program to help him keep a log of international radio stations.

Wayne logged into the ARRL bulletin board and found two programs which might fit the bill. One runs under DOS and produces report sheets which can be sent off to broadcasters as a reception report which should qualify for a QSL card.

The other is a Windows-compatible program which is an international radio database that can also control a radio set with the right interface (which includes Icom, Kenwood and Yaesu models at the moment). While the demonstration version is free, to get a copy with all the relevant data costs US\$25.00.

Wayne suggests this may represent good value, though. For more information, contact Wayne via E-mail at w.dillon@ic.ac.uk or via snail mail at Flat 1, 31 Stanmore Hill, Stanmore, Middlesex HA7 3DS.

Broadcast News

On to the broadcast news now. Long wave enthusiasts may have noted the return of RadioRopa to the frequency of 261kHz. That is the old Radio Volga and Radio Russia channel which entertained Soviet troops until their withdrawal, a couple of years ago, from the former GDR.

The long wave channel is operational from 0400 to 2100UTC. And you can also hear the station on short wave on either 5.975 or 5.98MHz.

Now some news for satellite listeners. Radio Netherlands is using two audio subcarriers on the RTL 5 television channel on Astra.

The Radio Netherlands Transponder 60 on 10.963GHz is carrying English and Dutch from the station. Try English on 7.74MHz at 0030, 0430, 1830 and 2030UTC and 7.92MHz at 0430, 0730, 1930 and 2230UTC.

Radio Sweden has moved its

audio service on Astra from transponder 26 to transponder 33 following the change of TV service on 26. The ZDF TV at 10.964 now has Radio Sweden in English and other European languages at 7.38MHz. Meanwhile, traditional radio listeners can tune to Stockholm at 1615, 1730, 2030 and 2130UTC on either 1179kHz medium wave or on 6.065MHz short wave.

Radio Norway's weekly English programme, *Norway Now*, can be heard in Europe at 1300 on 15.34 and 9.59MHz, at 1800 on 15.22, 13.805 and 5.96MHz, and 1314kHz medium wave.

Radio Norway transmitters relay

Deutsche Welle and the BBC World Service, was evacuated when it looked as though the volcano was about to blow its top.

The station HCJB in Ecuador has stopped transmitting on single sideband. Budget cuts forced the ending of the service at the beginning of September which until then operated on 15.54 and 21.455MHz.

The station received reports from almost every part of the world for its s.s.b. transmissions. It's a shame that what could have been seen as a good marketing exercise for the station has been dropped.

The Voice of America's (VoA)

weekly *Communications World* has a new presenter following the departure of **Gene Reich** to WorldSpace, a satellite communications company based in Washington. **Kim Elliott**, the VoA audience research officer, is hosting for the time being, so listen out at 2130 on Saturday on 6.04, 9.76, 9.77, 15.205MHz and the upper sideband channel of 19.379MHz.

Iran is increasing its international broadcasting, with a reported Serbo-Croat service started in August. There is a daily transmission at 1630-1700 on a new out-of-band

frequency of 7.07MHz (slap in the middle of the 7MHz amateur band), and at 1800 on 11.715 and 9.65MHz.

Religious Stations

A new religious station launched a few weeks ago, WGTG in McCaysville, Georgia, is on the air on 7.355MHz. At the time of writing had been heard on Friday, Saturday and Sunday between 1300 and 2200UTC.

The WGTG Station owner, **David**

Frantz, said in an interview on Radio Netherlands' Media Network that he planned to increase to seven day a week tests from his 50kW transmitter soon. The station's address is **WGTG, PO Box 1131, Copperhill, Tennessee 37517, USA**.

Meanwhile, WYFR is reported to be in financial trouble. The station is run by **Mr Harold Camping** who claims the world ended in 1994. That must be the reason he is apparently not paying his staff, but why he sees the need to continue broadcasting if none of us exists anymore defeats me...

A third religious station to be heard on the short wave bands out of the US is WJCR in Kentucky. It operates in English and Chinese on 7.49 and 13.595MHz using 50kW transmitters. The station runs 24 hours-a-day, and can be reached at **PO Box 91, Upton, Kentucky 42784, USA**.

Burma Jamming

Jamming has affected broadcasts into Burma after the release this summer of the opposition leader **Aung San Suu Kyi**. The BBC World Service Burmese programmes are suffering interference, according to Bush House, as are broadcasts from the Democratic Voice of Burma relayed from Norway. That station has extended its evening transmission at 1430, running now for 45 minutes instead of 25. The channels used by the station are 11.85, 9.725 and 7.135MHz.

That's all I've got for you this month so, until next month keep listening and sending your letters to me via the PW Editorial Office.



neighbouring Denmark's external service, currently in Danish only. But from the start of 1996, Danmarks Radio plans to reintroduce English for listeners overseas, the first time the station has broadcast in another language since the 1960s. Watch out for more details in this column.

An erupting volcano forced international transmitters off the air on the Caribbean island of Montserrat in August. The Caribbean Relay Company, operated jointly by

END

PACKET PANORAMA

This month Roger Cooke G3LDI returns to the computers of yesteryear, before bringing some disturbing news for packet users.

Some time ago, on a reader's behalf, I asked for information about using the Sinclair Spectrum computer for packet radio. From the replies, it would seem that there are quite a few amateurs doing just that!

I received a letter from **J & P Electronics Ltd.**, regarding their mention in the September column. Apparently, they can offer a whole range of programs for the Spectrum, and in addition they can offer the modem.

The cost of the packet modem with watchdog timer including free software for the Spectrum is £75.00. It's also available with a printer port for £85.00. J & P Electronics can also supply programs for the Commodore 64, VIC-20, BBC-B, Atari ST/STE, Amiga 500/600 and others. The Spectrum has been around for a number of years now, but like the BBC-B, there are still many, possibly thousands, being used.

The strange commands referred to in the original reader's request, could possibly be the remote commands, starting with a double forward slash pair '//'. For example:

```
//L Lists messages *
//R name Read named file *
//S subject Send message to mailbox*
//. After sending message to mailbox,
next transmission must be //, to close
file *
//I Read information file
//J Read last 16 stations heard
//R H Read Help File (This list of
remote commands) *
//D Disconnect
```

Commands marked with a * are for microdrive versions only.

Law of Defamation

The use of the laws of defamation have been creeping into packet radio recently. Whilst I was in Australia last year, I was reading an amateur radio journal and came across an article which I think bears comment here.

I would imagine that most sysops are totally tired of the sick individuals who use the BBS and packet system as a wall, putting their vile rubbish out as bulletins, usually from a pirated

callsign. We will continue to suffer this barrage of rubbish, until we do something about it ourselves.

We must police the network with a series of personally issued passwords, M-filters, reject files and so on. Until that day comes, there will always be messages to trap and kill daily.

I am not a lawyer, so please excuse the lack of legal jargon and references. But looking at it purely from a layman's point of view, we are in a more invidious position than we realise. The media, newspapers, radio and television publish countless expressions of opinion from a diverse range of people.

If a person feels that their reputation has suffered as a result of such publicity, they sue for damages, usually with amounts looking like telephone numbers! In doing so, both the publisher of the title and author of the article are normally sued, the author for writing it and the publisher for publishing it.

It is not even necessary for the person's name to be mentioned if the description or identification of him or her is sufficient to enable people to recognise who is being spoken or written about. Thus it is common for people who try to defame without identifying any particular individual by name to find themselves being sued.

Defamatory Words

The law presumes that, if defamatory words are spoken or written and published, what is written is false unless the person sued proves to the contrary. So, the normal onus of proof - whereby a person is deemed to be innocent until proven guilty - is effectively reversed because the person doing the suing goes into court with a presumed good reputation and the onus is on the person sued to show that this is undeserved.

By allowing systems automatically to send on messages that they receive, the damage can be done without the sysop even knowing about it, as we all know. This means that an amateur in such

a situation could be liable for prosecution even though he was not the instigator of the message.

Defamation is spoken of in the text books as being like a strict liability. Because the negligence has little to do with liability, it is in fact irrelevant that a publication accidentally defames, so long as the person intentionally published.

Where a bulletin board or repeater is allowed to publish without supervision a court could find that the publication was intentional. This would be a very dangerous situation for the average sysop, even with a lottery win to back him up!!

Now I come to the nub of this preamble. According to a report in the *Sydney Morning Herald*, a West Australian man was awarded Australian \$40,000 damages after a message libelling him was found on a computer bulletin board. This is believed to be the first time a successful defamation action has been taken in Australia over material published on an electronic mail system.

Apparently, an anthropologist working in the Kimberley region sent a message to a world-wide science related network of bulletin boards. This message alleged sexual misconduct as well as professional misbehaviour, reflecting on the academic competence, of a Dr. David Rindos. Dr. Rindos was, at the time, at the University of Western Australia's department of Anthropology.

The judge hearing the case commented about the slurs, before going on to say that the nature of the remarks was such that they are likely to be repeated. He also said that any rumours of a like kind, circulating previously, were likely to gain strength from the new publication. Quotes from this case are courtesy of the WIA.

Profound Implication

This case has profound implications, not just for telephone-accessed computer bulletin board networks, but for the amateur packet radio network, too. Items, articles or bulletins sent as 'electronic mail' are 'published' by the computer network system, just as



With the Australian story this month, 'Packet Panorama' has a real British Commonwealth flavour, made even stronger when Roger Cooke G3LDI tells us he's persuaded Canadian friend Dave VE7IM onto packet! Roger G3LDI is pictured (far right) at VE7IM's QTH during his 1994 visit. Others in the picture (left to right) are Suzanne, XYL of VE7IM, Jean, XYL of VE7PL (Fred VE7PL is behind the camera) and the new packeteer himself VE7IM @ VE7FMY.#NVI.BC.CAN.N.

surely as printed journals.

The issues and implications are complex, and the legal arguments tortuous, but BBS sysops, and the whole amateur community, will have to come to grips with the situation sooner or later. I know it has been stated that the originator should bear the responsibility, but is this enough to protect the sysop?

I think we need a legal ruling on culpability. Hopefully the DCC will be actively engaged in producing such a ruling!

Let's hope this will make people think twice before putting digits to keyboards. I don't suppose for one minute it will stop the average hooligan that crawls around the network.

But as sysops, we must be more vigorous with our editing and ensure that comments on our BBS stay legitimate. Political or religious comment or questions about the integrity of others have no place in the amateur segment of the r.f. spectrum.

On that low note I'll say, see you next time. As usual, I may be contacted as follows:

On Packet: G3LDI @ GB7LDI.#35.GBR.EU
By Email: (with thanks via) mtaylor@uk.mdis.com
By Telephone: (01508) 570278.
On Snail mail: The Old Nursery, The Drift, Swardston, Norwich, Norfolk NR14 8LQ.

END

BARGAIN BASEMENT

Write your advertisement clearly in BLOCK CAPITALS - up to a maximum of 30 words plus 12 words for your address - and send it together with your payment of £3.00 (cheques payable to PW Publishing Ltd.), or subscriber despatch label and corner flash to: **Zoe Shortland, PW Bargain Basement, Arrowsmith Court, Station Approach, Broadstone, Dorset BH18 8PW.**

Subscribers must include the despatch label bearing their address and subscription number to qualify for their free advert.

Adverts published on a first-come, first-served basis, all queries to **Zoe Shortland on (01202) 659910.**

Advertisements from traders, or for equipment that is illegal to possess, use or which cannot be licensed in the UK, will not be accepted. No responsibility will be taken for errors.

For Sale

934MHz CommTel NPR934 and 934 pre-amp, £225. 144MHz rig, Kenwood TR-7625, £150. Dave G7TEC, Leamington Spa. Tel: (01926) 425220.

Advance signal generator, 2 to 4GHz and heterodyne frequency meter, 100 to 400MHz, £100 for both o.n.o. All issues of *PW* and *SWM* from 1989 to 1995. Offers? Peter Werba G7FXO, Tanglin, 47 Ulwell Road, Swanage, Dorset BH19 1LG. Tel: (01929) 425805.

AEA PK232MBX TNC, practically new, complete with all leads and instruction manuals, PC-Packratt 2 Ver. 5.5A, PK-FAX and PC-Packratt for Windows Ver 2. Original cost, £370, yours for, £270. Tel: Surrey 0181-390 2407 (answerphone).

Brand new boxed RCA AR88D wave change switch, £25. D. Tapsell, Reading. Tel: (01734) 475103.

Collectors: Ex BBC Skelton Marconi frequency synthesisers, 0-27MHz range, 19in rack style 8.5in high, 58.5lbs, only 14 units, fair to good condition, working, £250 o.n.o. each, complete but non worker, £150 o.n.o. each. Buyer collects. Tel: Norfolk (01502) 678246.

Complete 50MHz station. Yaesu FT-690R all-mode with case and strap, as new, mic/modules, 6m linear amp, 100W, brand new, 6m low-pass filter, new, all boxed, total value £550, accept, £400. Derek, Warks. Tel: (01789) 297158.

Cushcraft R5 MkII h.f. vertical, as new, £170 o.n.o. Tait T520

lowband f.m. mobile (70MHz) 2ch programmable (diode matrix), £40, several available. Tel: Kilsyth (01236) 824781 after 6pm.

Drake TR7 transceiver, noise blanker, 300Hz, 1.8Hz filters, manual, PS7 p.s.u., astatic microphone, £750. Remote v.f.o. RV75, £75. Workshop manual, £15, boxed. Tel: Hemyock (01823) 680778.

Eddystone EB35 h.f./v.h.f./l.w./m.w. receiver, nice with book and boxed, two owners, £90. Buyer collects. Bernie, Suffolk. Tel: (01842) 812487 evenings.

FRG-8800 with v.h.f. converter and FRT-7700 a.t.u., g.w.o., £425. TS-140S, c.w. filter, p.s.u. PS430, mic MC43S, g.w.o., £600. Kenwood desk mic MC80, as new, £35. All o.n.o., cash and carry. G4MNB, QTHR. Tel: Swindon (01793) 826325.

FT-767GX (h.f. + 50, 144 and 430MHz), H-Mic, Comet GP-15 triband antenna, Comet CFX-514 triplexor and coax, all v.g.c., £1200 o.v.n.o. Mike, London. Tel: 0171-482 1461.

Garex v.h.f. airband pre-amp, 118-137MHz, 16dB gain, £15. *RSGB Callbook* 1995 edition, £7. R532 Signal airband receiver with books and mains transformer, £90. All plus post. Frank, Warwick. Tel: (01295) 670749.

Hameg 20MHz oscilloscope HM203-7, as new with probes and service manual, £350. Tel: Cornwall (01872) 580215.

Howes AT160 a.m., d.s.b., c.w. TX kit PCB MA4 mic amp, assembled by Howes crystal hardware, reason for sale, cost, £109, accept, £75 o.n.o. Tel: Bedfordshire (01234) 720591.

Icom IC-745 h.f., £695. AOR AR2002 scanner, £245. ADI 70cms hand-held, £125. AEA PK232, £145. BNOS LPM432-10-50 linear, £110. Tel: Ruislip (01895) 676919.

JRC NVA-319 speaker, £95. Global AT-2000 tuner, £50. Datong FL3 filter, £80. ICS FAX software and interface, £20. All plus postage. Dave, Fife. Tel: (01383) 824634 after 1800 hours.

Kenwood 180S, £350 o.v.n.o. Trio 440S, built-in a.t.u., full coverage, £725 or part exchange for Yaesu 747. Must collect. John, Derbyshire. Tel: (01283) 221870.

Pye transceivers, Olympics, £25 (3 off), Reporters, £20 (4 off), Westminster, £10 (3 off), Base station (170MHz), £50. Racals RA17 MkI (scarce), £120. MkII, £75. 17L, £125. AR88LF, £110. AR88D, £150. All working. Tel: Yorkshire (01482) 869682.

R1157 communications receiver, ex. RAF WWII, original, g.w.o., Leak Stereo 70, not working. Vintage valve data books, 1920s wireless magazines, 1950s service manuals, about 70 valves. Offers. Tel: Sussex (01323) 638836.

Rexon/Albrecht RL402 430MHz hand-held plus NiCads, charger, dry cell case, two months old, ideal rig for Novice, etc., boxed, with manual, as new, £155 inc. P&P and ins. Simon G14NBO, QTHR. Tel: (01247) 459864.

Trio 9000 144MHz multi-mode transceiver, g.c., manual and boxed, prefer buyer inspects/collects, £260 o.n.o. Barry G4LKF, Corby. Tel: (01536) 260598.

Yaesu FRG-7700 receiver. Yaesu FRG-9600 receiver. Datong FL3 filter inc. p.s.u. Datong indoor antenna. All good condition, £450 the lot, will split. Gary, Reading. Tel: (01734) 869288 or days (01734) 758822.

Yaseu FT-726 144MHz h.f. 10-12-15, boxed, manual, v.g.c., £650. No offers. Yaesu 400RC rotator with bottom bracket, £125. No offers. Martin G0MVP, Worthing. Tel: (01903) 690518 after 8pm.

Wanted

FT-767 with 2/6/70 or Icom 736, must be good condition. Tel: Tyne & Wear 0191-455 7806 after 6pm.

Morse practice oscillator, one valve or two valve, as marketed by Webbs Radio, London in the 1940s. James Dennis, Bristol. Tel: (01934) 833265.

Racal SA28 counter, MA98, TX PA, R206, R201, R308, WS33, No. 53 TX ET4336 TX, R236, C50. Peter Werba G7FXO, Tanglin, 47 Ulwell Road, Swanage, Dorset BH19 1LG. Tel: (01929) 425805.

Yaesu FT-404, crystal controlled, 430MHz hand-held transceiver, working. G7PWH, Haywards Heath. Tel: (01444) 441460 after 8.30pm please.

If you are selling equipment via 'Bargain Basement' it is in your interest to ensure cheques have been 'cleared' by the bank before parting with your equipment. If in doubt about cheque clearance times and bank fees for 'express' cheque clearance, or for returning un-paid ('bounced') cheques, you are advised to consult your bank.

When advertising equipment for sale, you should clearly state in your advert whether equipment is professionally built or 'home-brewed' or modified. **You are also advised to insure equipment against damage during transit (details available from the Post Office or carrier of your choice).**

The Publishers of *Practical Wireless* also wish to point out that it is the responsibility of the buyer to ascertain the suitability of goods offered for purchase.

Whilst prices of goods shown in advertisements are correct at the time of going to press, readers are advised to check both prices and availability of goods with the advertiser before ordering from non-current issues of the magazine.

DISCLAIMER

DISCLAIMER

Some of the products offered for sale in advertisements in this magazine may have been obtained from abroad or from unauthorised sources. *Practical Wireless* advises readers contemplating mail order to enquire whether the products are suitable for use in the UK and have full after-sales back-up available.

The publishers of *Practical Wireless* wish to point out that it is the responsibility of readers to ascertain the legality or otherwise of items offered for sale by advertisers in this magazine.

For Sale

VINTAGE SERVICE DATA, circuits & manuals – for: HiFi, Military, Radio, Television & car radio up to the 1060's. Free brochure. Savoy Hill Publications, "Seven Ash Cottage", Seven Ash, Combe Martin, North Devon. EX34 0PA. Tel: (01271) 882665.

TRANSCEIVER PRC 316 HF, AM, CW, watts output with headphones and boom microphone and manual last few. £105. Megger crank handle type 500v. £45. All prices include P&P send large SAE for list. C.P. Surplus, 56A Worcester Street, Wolverhampton WV2 4LP. Tel: (01902) 203115.

24cm ATV EQUIPMENT, transmitters, Pre-Amps, Antennas. SAE G81KP, 1 Melstock, Weymouth, Dorset DT3 6JX.

TECHNICAL MANUALS, AR88, CR100, R210, HR0. £5 each. Circuits £1.50. Hundreds available. SAE list. Bentley, 27 De Vere Gardens, Ilford, Essex IG1 3EB. Tel: 0181-554 6631.

JAPANESE GAAS-FET, RF power module, microwave TR's and devices for communication and industrial use. T.YOSHIHARA OSAKA 564, JAPAN, Cable: TYOSHIHARA SUITA.
FAX: 816-338 3381.

TRANSCIVER P.R.C. 316 H.F.A.M.C.W. Watts output with headphones and boom microphone and manual last few. £105.00 Megger crank handle type 500V £45.00. All prices include P&P send large S.A.E. for list. C.P. Surplus 56a Worcester Street Wolverhampton WV2 4LL. Tel: 01902 20315

ICOM IC-R7000 Scanner Receiver and Dressler
Active Antenna £525 Tel: (01256) 56524

TEL: 0181-684 1166. FAX: 0181-684 3056.

SCIENTIFIC SHAREWARE

Business, Leisure, Engineering, CAD, DTP, Maths, Stats, Chemistry, Education, Electronics, Ham Radio, Esoteric, Medical, Raytracing, Programming & languages, Tools, Utilities, WP, Editors, Comms, Special applications, Esoteric, Novelty, Astronomy & hundreds more.

Send £2.50 (voucher provided refundable on first order) or

**PDSL, Winscombe House, Beacon Road,
Croyborough, East Sussex TN61 1JL**

Tel: (01892) 663298 FAX: (01892) 667473

WANTED FOR CASH Valve or solid state communication receivers Pre-1980. Preferably working and in good condition. Non working sets considered also domestic valve radios. Items of Government surplus wireless equipment and obsolete test equipment. Pre-1965 wireless and audio components and accessories. Pre-1975 wireless and TV books and magazines. Also, most valves wanted for cash. Must be unused and boxed. CBS, 157 Dickson Road, Blackpool, FY1 2EU. Tel: (01253) 751985 or Fax: (01253) 302979.

WANTED high gain ferrite rod aerials must be half inch in diameter no more or less. Must be six inches long or more. Contact Peter Tankard on Sheffield 0114 2343030 any time.

The prepaid rate for classified advertisements is 42 pence per word (minimum 12 words), box number 70p extra. Semi-display setting £13.90 per single column centimetre (minimum 2.5cm). Please add 17.5% VAT to the total. All cheques, postal orders, etc., to be made payable to the PW Publishing. Treasury notes should always be sent by registered post. Advertisements, together with remittance should be sent to the Classified Advertisement Dept., Practical Wireless, Arrowsmith Court, Station Approach, Broadstone, Dorset BH18 8PW. Tel: (01202) 659920, Fax: (01202) 659950

Category heading:

[illegible]

PYE VHF Commercial Transmitter Receiver and Antenna FOR SALE.
Tel: (01608) 661711 Birmingham.

ICOM IC-215 Transceiver VGC in original box c/w charger. £110 ONO. Tel/Fax: (01908) 566692.

COMPLETE 2M STATION, TR-9130 Transceiver with Rotator, Kenwood SW-200B SWR, Kenwood SP-230 Speaker, Pre-Amplifier, PSU's, QUAD, Co-Axial Switches, Atari 520STFM with Monitor, Printer etc. All items BOXED or NEW CONDITION.
Tel: (01734) 331082.

Valve and Transistor Radio Enthusiasts: Books on collecting list, Old Time Supplies, P.O. Box 209, Banbury, Oxon OX15 5DP.

Bosch KF 83X 20W 4m f.m. Mobile. 10 Channels 70.250-70.475 for f.m. or 70.3125-70.4875 for packet or 78.100 for ATC. G.W.O. £80 each. Contact Les Tel: (01246) 200096. Office Hours.

Morse

TAKE THE STRAIN OUT OF LEARNING TO SEND AND RECEIVE MORSE. Works with any PC compatible. ONLY £8.99 from **SHOESTRING SOFTWARE**, 78 Carmarthen Road, Swansea SA1 1HS
(FREE DEMO AND CATALOGUE AVAILABLE, 3.5" DISKS ONLY).

Receivers

B.F.O. KITS Resolves single side-band on almost any radio, £16.49. H. CORRIGAN, 7 York Street, Ayr KA8 8AR.

RAE Video

RAE "THE VIDEO" The definitive learning aid for the exam! A full three hour VHS video based on the highly successful training course developed by Chris Budd G0LOJ.

This unbeatable package comes complete with a detailed course study booklet, packed with key learning points, facts and diagrams for instant reference and easy revision. Only £22.50 plus £2 post & packing or available to callers.

Send cheque or postal order to:

TRICORN MARKETING LTD

31 Berkeley Square

Bristol BS8 1HP.

Tel: 0117-921 5390.



CommSlab Ltd

READY BUILT COMMUNICATION DEVICES FROM STOCK

(Devices for IBM compatible PCs)

µ-MODEM Allmode Baycom, Hamcomm and JVFAX compatible modem. Complete with AF cable/plug and software. Near matchbox sized! Full Tx/Rx for SSTV, FAX, CW, RTTY, AMTOR and PACKET. **£89.95**

PKTCOMM Enhanced Baycom compatible modem. Assembled and housed in a quality aluminium case. This is NOT a kit. **£44.95**

RSD116 Our popular JVFAX & HAMCOMM compatible modem. Built into a std 25 way 'D'. SMD tech. Leads and Tech Help docs supplied. **£19.95**

RTX05MOD Enhanced Serial port. Ideal for BPQ users and where additional ports are required. 9 selectable IRQs and 8 COM port addresses! **£28.95**

PO Box 19, Erith, Kent DA8 1LK
TEL: 01322 330830 FAX: 01322 334904

ELECTRONICS VALVES & SEMICONDUCTORS


Phone for a most courteous quotation

081-743 0899
Fax: 081-749 3934

We are one of the largest stockists of valves etc, in the U.K.

COLOMOR (ELECTRONICS) LTD.

170 GOLDHAWK ROAD
LONDON W12 8HJ



YAESU, ICOM, AOR etc.

SALES & SERVICE Holdings of Blackburn Ltd. Inc. 1952, Yaesu Agents since 1972. G3LL 40+ years in electronics. Best prices for callers (try us with cheque or 'real money' if you want to bargain) only xyl and self to pay so we can afford to give good prices - valves and CW filters for old Yaesu eg. Phone, normally open Tues, Wed, Fri and Sat. Lunch 12.00-1.30 but phone first we enjoy a few holidays!

G3LL HOLDINGS, AMATEUR ELECTRONICS
45 JOHNSTON STREET, BLACKBURN, BB2 1EF
(0254) 59595

ESSEX AMATEUR RADIO SERVICES

G7VVKC

ALAN

THE BEST

8.00am

01268 752522

8.00pm

WANTED

AMATEUR RADIO EQUIPMENT COMPLETE STATIONS BOUGHT

We will collect your equipment and pay you cash within a 150 mile radius, or we have a FREE collection service countrywide

SEE US AT THE RALLIES

BUY • SELL • PART EXCHANGE
• NEW • SECOND HAND

• ANYTHING CONSIDERED • OPEN ALL HOURS

"Just a small Family Business that wants to stay small"

RING NOW: We think you'll be surprised!

4 NORTHERN AVENUE, BENFLEET, ESSEX SS7 5SN

SAE for List • Callers By Appointment Only

£30 WORTH OF VOUCHERS

CATALOGUE WAS £2.50 NOW FREE

Only the cost of a stamp or a phone-call

THINK COMPONENTS - THINK CRICKLEWOOD

LARGE RANGE OF COMPONENTS AND ACCESSORIES FROM THE FAR EAST TO THE WESTERN HEMISPHERE INCLUDING:

RESISTORS
CAPACITORS
INDUCTORS
TOOLS
TEST EQUIPMENT
BENCHMARK

TRANSISTORS
CONDUCTORS
ICS
PLUGS
SOCKETS

Cricklewood Electronics

PLEASE SEND ME A COPY OF THE 1995 CRICKLEWOOD CATALOGUE.

Name.....

Address.....

.....

.....

.....

.....PW

Cricklewood Electronics Ltd, 40-42 Cricklewood Broadway, London NW2 3ET. Tel: 0181-450 0995 Fax: 0181-208 1441

ORDER FORM

FOR ALL MAIL ORDER PURCHASES IN PRACTICAL WIRELESS

SUBSCRIPTIONS

PRACTICAL WIRELESS - 1 YEAR

☐ £22.00 (UK) ☐ £25.00 (Europe) ☐ \$45* (USA) ☐ £27.00 (Rest of World)

SPECIAL JOINT SUBSCRIPTION WITH SHORT WAVE MAGAZINE (1 YEAR)

☐ £42.00 (UK) ☐ £47.00 (Europe) ☐ \$80* (USA) ☐ £51.00 (Rest of World)

* \$ cheques only please.

Please start my subscription with the issue.

SUBS CLUB/READER OFFER Page 16

☐ I am a PW Subscriber please send me Alinco DJ-S1EZA 144MHz f.m. Transceiver(s) @ £199.95 inc. VAT & P&P (UK).....£

My Subscriber Number is.....

☐ I am a PW Reader please send me Alinco DJ-S1EZA 144MHz f.m. Transceiver(s) @ £215.95 inc. VAT & P&P (UK) and my FREE PW subscription.£

Overseas readers please apply for postage rates.

BINDERS

☐ Please send me PW Binder(s)
@ £5.50 each.....£

Postal charges: £1 for one, £2 for two or more (UK & overseas surface).

BOOKS

☐ Please send me the following book/s,

.....£
.....£
.....£
.....£
.....£

☐ My book order totals over £20 excluding P&P, please send me my FREE copy of 25 Simple Shortwave Broadcast Band Aerials (BSPW11)

Postal charges.

UK: £1 for one, £2 for two or more.....£

Overseas:

£1.75 for one, £3.50 for two or more.....£

NEW FASTER NEXT DAY SERVICE (UK)

(For orders received a.m.) £3.75.....£

GRAND TOTAL£

We have re-designed our Order Form to accommodate the new Cardcharge service for Subscribers. This enables Subscribers to save a lot of hassle by using their credit card to pay for their subscription on an automatic annual renewal basis. To take advantage of this service complete the special Cardcharge form at the foot of this page and we will take care of the rest.

CREDIT CARD ORDERS TAKEN ON (01202) 659930
between the hours of 8.30 am - 4.30 pm Outside these hours your order will be recorded on an answering machine.

FAX ORDERS TAKEN ON (01202) 659950

Or please fill in the details ticking the relevant boxes, a photocopy will be acceptable to save you cutting your beloved copy!

To: PW Publishing Ltd., FREEPOST, Arrowsmith Court, Station Approach, Broadstone, Dorset BH18 8PW.

PAYMENT DETAILS

Name

Address

.....Postcode

Telephone No.

I enclose cheque/PO (Payable to PW Publishing Ltd.) £

\$

Or

Charge to my Access/Visa Card the amount of £

\$

Card No.

Valid fromto.....

SignatureTel:.....

Orders are normally despatched by return of post but please allow 28 days for delivery. Prices correct at time of going to press. **Please note:** all payments must be made in Sterling.

CREDIT CARD ORDERS TAKEN ON (01202) 659930
FAX ORDERS TAKEN ON (01202) 659950

Use this part of the Order form **only** if you want to use Cardcharge to pay for your subscription. If you want to take out a subscription, or order other items and want to pay by conventional methods, please use the main part of the Order Form.

CARDCHARGE AUTHORITY (for subscriptions only)

To

I authorise you, until further notice in writing, to charge mycard unspecified amounts in respect of.....(yearly magazine subscription)

as and when they become due

Visa/MasterCard account number

Expiry date

Name (as on credit card).....

Full Address.....

.....

.....

.....Postcode.....

Merchant reference: 6940936

Signature

Date

This authority may be cancelled by writing to PW Publishing Ltd. at any time.

BOOK SERVICE

The books listed have been selected as being of special interest to our readers. They are supplied direct to your door. Many titles are overseas in origin.



TO ORDER: PLEASE USE THE ORDER FORM ON PAGE 78 OR TELEPHONE
THE CREDIT CARD HOTLINE ON (01202) 659930 (24 HOURS)

LISTENING GUIDES

Airband

AIR BAND RADIO HANDBOOK 5th Edition

David J. Smith

Air band radio listening enables you to listen-in on the conversations between aircraft and those on the ground who control them, and is an increasingly popular and fascinating hobby. A new chapter on military air band has been added. The author, an air traffic controller, explains more about this listening hobby. 190 pages. £8.99

AIR & METEO CODE MANUAL 14th Edition

Joerg Klingenfuss

Detailed descriptions of the World Meteorological Organisation Global Telecommunication System operating FAX and RTTY meteo stations, and its message format with decoding examples. Also detailed description of the Aeronautical Fixed Telecommunication Network amongst others. 358 pages. £20.00

AIRWAVES 95

The Complete HF/VHF/UHF Aviation Frequency Directory

Much of the more obscure (especially military) information is made accessible in this volume. Not only are facilities/activities listed, giving their frequencies, but also there are reverse lists - when the frequency is known, the allocated user can be found.

Airways sectors are listed so much more clearly than in the Supplements. The main transponder code groups are included. In fact, the book covers all the way from h.f. up to u.h.f. 100 pages. £7.95

AIRWAVES EUROPE

This spirally bound book is published in a similar format to *Airwaves 95* and contains over 5000 aviation frequencies. There are v.h.f./u.h.f. civil and military airband frequencies given for 38 countries and their dependencies in east and west Europe. A must for airband enthusiasts both in the UK and Europe. 124 pages. £9.50

CALLSIGN 95

The Civil & Military Aviation Callsign Directory

Intended for the aircraft and radio enthusiast to use as a stand alone reference, or as a partner to *Airwaves 95*. Over 5300 military and 3000 civil callsigns are covered in detail. 108 pages. £7.95

FLIGHT ROUTINGS 1995

Compiled by T.T. & S.J. Williams

This guide was produced with the sole aim of assisting airband listeners to quickly find details of a flight, once they have identified an aircraft's callsign. Identifies the flights of airlines, schedule, charter, cargo and mail, to and from the UK and Eire and overflights between Europe and America. 140 pages. £6.50

HIGH IN THE SKY

Davis Barker & McKenzie

This new edition comprises ten sections. The first seven sections are an introduction of radios, antenna and radio communications, information about airways, sections covering v.h.f. and h.f. aeronautical communications, and a brief look at ACARS. The majority of the book is taken-up by section eight, which lists all known Selcalls in three different sequences (by airline/operator, by Selcall and by registration). The 9th section is devoted to Selcalls used by executive jets; these are separate, since these Selcalls are not always fixed. Mostly re-written this volume contains the all-important frequency listings for the aeronautical networks, airlines, the military and the commercial networks. 166 pages. £6.95

THE AIRCRAFT JARGON BOOK

Ron Swinburne

Designed to give the newcomer some guidance on what to expect from Airband and how to extract the most from listening to it. This guide is essential reading for those not involved in the aviation industry. It gives a valuable insight to many aspects of aviation. Explained are the principles of Airband reception, aircraft instrumentation, radio services, weather navigation, etc. and air traffic control, to list but a few. Read this book and you could well be hooked. 72 pages. £6.95

UNDERSTANDING ACARS 2nd Edition

Aircraft Communications Addressing and Reporting System

Ed Flynn

Here is the information you need to understand and decode the Aircraft Communications Addressing and Reporting System, otherwise known as ACARS. Deals with the equipment needed as well as message format and type. 80 pages. £9.95

WORLDWIDE AERONAUTICAL COMMUNICATIONS FREQUENCY DIRECTORY 2nd Edition

Robert E. Evans

This book covers aeronautical radio communications, voice and digital, within the range of h.f. and v.h.f./u.h.f. frequency bands. Commercial, military and paramilitary operations are included. Divided into logical sections, it provides useful information and frequencies on almost anything and everything airband. 260 pages. £19.95

Broadcast

A GUIDE TO THE WORLD'S RADIO STATIONS BP355

Peter Shore

As in 'Broadcast Round-up', his column in *PW*, Peter Shore has laid this book out

in world areas, providing the listener with a reference work designed to guide around the ever-more complex radio bands. There are sections covering English language transmissions, programmes for DXers and s.w.l.s. Along with sections on European medium wave and UK f.m. stations. 266 pages. £5.95

POP WENT THE PIRATES

Keith Skues

A very comprehensive history of Pirate Radio. Thanks to *Pop Went The Pirates* the whole era of people seeking to provide a popular alternative radio service, under quite considerable opposition, will be remembered. I don't suppose we will ever see or hear the like of it again. £15.95

Datamodes

GUIDE TO FAX RADIO STATIONS

15th Edition

Joerg Klingenfuss

The new edition of this super reference book covers the world's facsimile stations, their frequencies and methods of working. There is a section covering the equipment needed to receive FAX over the radio. To give you an idea of what is available there are many pages of off-air received FAX pictures. 392 pages. £20.00

GUIDE TO UTILITY STATIONS

13th Edition

Joerg Klingenfuss

This book covers the complete short wave range from 3 to 30MHz together with the adjacent frequency bands from 0 to 150kHz and from 1.6 to 3MHz. It includes details on all types of utility stations including FAX and RTTY. There are 19549 entries in the frequency list and 3590 in the alphabetical callsign list plus press services and meteorological stations. Included are RTTY & FAX press and meteo schedules. There are 11800 changes since the 10th edition. 534 pages. £30.00

POCKET GUIDE TO RTTY AND FAX STATIONS

Bill Laver

A handy reference book listing RTTY and FAX stations, together with modes and other essential information. The listing is in ascending frequency order, from 1.6 to 26 MHz. 56 pages. £3.95

RADIOTELETYPE CODE MANUAL 13th Edition

Joerg Klingenfuss

This book gives detailed descriptions of the characteristics of telegraph transmission on short waves, with all commercial modulation types including voice frequency telegraphy and comprehensive information on all RTTY systems and c.w. alphabets. 96 pages. £14.00

Frequency Guides

1995 Super Frequency List

Joerg Klingenfuss

This new CD-ROM has been designed for use with IBM PCs or clones running Windows 3.1. The CD-ROM comes complete with its own viewing software and includes 14000 frequencies that have been extracted from the *Klingenfuss Guide to Utility Stations*. This frequency listing is supplemented by 1000 abbreviations and 1200 formerly active frequencies. As this list was last updated in January 95 it's well up-to-date. £20.00

FERRELL'S CONFIDENTIAL FREQUENCY LIST 9th Edition

Compiled by Geoff Hallihey


Spirally bound, this easy-to-use reference book covers 1.6 - 28MHz in great depth, all modes and utility services, with new reverse frequency listing showing every known frequency against each callsign, who's using what frequency and mode, what's that callsign? 544 pages. £17.95

PASSPORT TO WORLD BAND RADIO 1996

This book gives you the information to find and enjoy the world of broadcast band listening. It includes features on different international radio stations, receiver reviews and advice as well as the hours and language of broadcast stations by frequency. The 'blue pages' provide a channel-to-channel guide to world band schedules. 528 pages. £14.50

SHORT WAVE INTERNATIONAL FREQUENCY HANDBOOK

This book contains a comprehensive frequency listing covering 400kHz - 30MHz



PW BOOK SERVICE



(01202) 659930 (24 HOURS)

Internet orders: bookstore@pwpub.demon.co.uk

For every book order received between October 12 and

November 8 that totals £20 or more

excluding P&P, the customer will receive a

FREE COPY OF 25 SIMPLE SHORTWAVE BROADCAST BAND AERIALS.

If ordering by telephone please quote **BSPW11** to qualify for this offer. So, don't delay, browse through our book list and order those books today!

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

25 Simple Shortwave Broadcast Band Aerials

P. W. HALL

and is packed with everything from the basics of short wave listening to explaining FAX and RTTY. In this updated version there are many new broadcast and utility stations listed. 188 pages. £12.95

UK SCANNING DIRECTORY 4th Edition

This spiral bound book lists over 20000 UK spot frequencies from 25MHz to 1.6GHz. Articles on scanning in the UK. 335 pages. £17.50

WORLD RADIO TV HANDBOOK 1995

Country-by-country listing of l.w., m.w. & s.w. broadcast and TV stations. Receiver test reports, English language broadcasts. The s.w.l.'s bible. 608 pages. £15.95

General

EAVESDROPPING ON THE BRITISH MILITARY

Michael Cannon

For the very first time a book has been published showing how to monitor British Military communications. All you need is a short wave receiver, lots of time and patience, and this secret world will open up to you, providing many hours of enjoyment. Also included is the largest British military callsign list ever to be published. 166 pages. £17.50

THE COMPLETE SHORT WAVE LISTENER'S HANDBOOK 4th Edition

Hank Bennett, Harry Helms & David Hardy

This book is a comprehensive guide to the basics of short wave listening. Everything you need to get started as an s.w.l. is explained in a clear and easily understood manner. Receivers, antennas, frequencies, propagation, Q-codes, etc. are all covered. 321 pages. £17.95

SHORT WAVE COMMUNICATIONS

Peter Rouse GU1DKD

Covers a very wide area and so provides an ideal introduction to the hobby of radio comms. International frequency listings for aviation, marine, military, space launches, search and rescue, etc. Chapters on basic radio propagation, how to work your radio and what the controls do, antennas and band plans. 187 pages. £4.50

Satellite

AN INTRODUCTION TO AMATEUR COMMUNICATIONS SATELLITES

BP290. A. Pickard

This book describes several currently available systems, their connection to an appropriate computer and how they can be operated with suitable software. The results of decoding signals containing such information as telemetry data and weather pictures are demonstrated. 102 pages. £3.95

AN INTRODUCTION TO SATELLITE COMMUNICATIONS BP326

F. A. Wilson

A simple, (with the minimum of mathematics) beginner's book covering satellite communications in a practical way. It provides a handy basic reference source on this complex subject and is aimed at up-dating someone who is familiar with radio communications. 230 pages. £5.95

ARRL SATELLITE ANTHOLOGY

The best from the Amateur Satellite News column and articles out of 31 issues of QST have been gathered together in this book. The latest information on OSCARs 9 through 13 as well as the RS satellites is included. Operation on Phase 3 satellites (OSCAR 10 and 13) is covered in detail. 97 pages. £5.95

NEWNES GUIDE TO SATELLITE TV

Derek Stephenson

This book, the 3rd edition, is a hard bound volume, printed on high quality paper. The author is a satellite repair and installation engineer and the book covers all information needed by the installation engineer, the hobbyist and the service engineer to understand the theoretical and practical aspects of satellite reception with dish installation and how to trouble-shoot when picture quality is not up to anticipated reception. Mathematics has been kept to a minimum. 371 pages. £18.95

SATELLITE EXPERIMENTER'S HANDBOOK 2nd Edition

Martin Davidoff K2UBC

The book is divided into four main sections - History, Getting Started, Technical

Topics and Appendices. It provides information on spacecraft built by and for radio amateurs. In addition, it discusses weather, TV-broadcast and other satellites of interest to amateurs. 313 pages. £14.50

SATELLITE TELEVISION

A layman's guide
Peter Pearson

Pictures from space, that's what satellite television is all about. Orbiting satellites, 35000km high, receive TV signals from stations on the earth and re-transmit them back again. This book explains all you need to know to set up your own satellite TV terminal at home, dish and accessories, cable and tuner.
73 pages. £10.00

SATELLITE TELEVISION INSTALLATION GUIDE

5th Edition
John Breeds

A practical guide to satellite television. Detailed guide-lines on installing and aligning dishes based on practical experience.
76 pages. £15.00

WEATHER SATELLITE HANDBOOK

5th Edition
Dr Ralph E. Taggart W8BDQT

This book explains all about weather satellites, how they work and how you can receive and decode their signals to provide the fascinating pictures of the world's weather. Plenty of circuit diagrams and satellite predicting programs.
192 pages. £14.50

WRTH SATELLITE BROADCASTING GUIDE

1995 Edition. Bart Kuperus

This brand new publication, written by one of the experts from the respected World Radio TV Handbook, will be a great help to everyone interested in the world of satellite radio and television. Featuring over 300 pictures and graphics. All the information you need to know about installing your own satellite system.
366 pages. £15.95

Scanning

AN INTRODUCTION TO SCANNERS AND SCANNING BP311

I. D. Poole

This book is ideal for anyone wanting to know what scanning is, and how it works. There are also chapters on radio in general, covering antennas, radio waves and how they travel, types of transmissions, broadcasting and amateur radio. All in all a superb starter book.
152 pages. £4.95

SCANNER BUSTERS

D.C. Poole

This guide to the methodology of beating the electronic ban on Scanning, deals with the subject of scrambling and encryption systems. The author explains in simple terms how p.m.r. works, the new digital cellular radio telephone systems, spread spectrum, frequency hopping and emergency services communication. How to get more from your scanner and a list of frequencies to listen to are also covered. It is a great reference for both new scanner owners and veterans alike.
64 pages. £4.95

SCANNERS 2 INTERNATIONAL

Peter Rouse GU1DKD

The companion book to the best selling *Scanners* provides even more information on the use of v.h.f. and u.h.f. communications bands. It gives details on how to construct accessories to improve the performance of scanning equipment. The book is international in its scope and contains frequency allocations for all three ITU regions, including country-by-country variations.
261 pages. £9.95

SCANNERS 3 PUTTING SCANNERS INTO PRACTICE. New Edition 4th Revision

Peter Rouse

This is the fourth revised and completely updated edition of *Scanners*, the complete v.h.f./u.h.f. radio listeners' guide and contains everything you need to know to put your scanner to better use. There is vastly more information than ever before on frequency listing, in particular actual frequencies used by coastal stations, airfields and emergency services. Also for the first time h.f. (short wave) bands, as many scanners now cover these frequencies.
271 pages. £9.95

SCANNING SECRETS

Mark Francis

The mysteries of monitoring explained. Advice on buying and operating your scanner. Where to listen and how to gather obscure frequencies. The myths and folklore exposed. All the information need to unlock the potential of your scanner.
280 pages. £16.95

AMATEUR RADIO

Antennas & Transmission Lines

25 SIMPLE AMATEUR BAND AERIALS BP125

E. M. Noll

63 pages. £1.95

25 SIMPLE INDOOR AND WINDOW AERIALS BP136

E. M. Noll

50 pages. £1.75

25 SIMPLE SHORT WAVE BROADCAST BAND AERIALS BP132

E. M. Noll

63 pages. £1.95

25 SIMPLE TROPICAL AND MW BAND AERIALS BP145.

E. M. Noll

54 pages. £1.75

AERIAL PROJECTS BP105

Practical designs including active, loop and ferrite antennas plus accessory units.
96 pages. £2.50

ALL ABOUT VERTICAL ANTENNAS

W. I. Orr W6SAI & S. D. Cowan W2LX

Covers the theory, design and construction operation of vertical antennas. How to use your tower as a vertical antenna and compact vertical designs for restricted locations. All about loading coils and a.t.u.s.
192 pages. £7.50

AMATEUR EXPERIMENTER'S GUIDE

Peter Dodd G3LDO

Although written for radio amateurs, this book will be of interest to anyone who enjoys experimenting with antennas. You only need a very basic knowledge of radio

PW BOOK SERVICE



(01202) 659930 (24 HOURS)

Internet orders: bookstore@pwpub.demon.co.uk

& electronics to get the most from this book. Chapters include details on measuring resonance, impedance, field strength and performance, mats and materials and experimental antennas.
200 pages. £8.90

ANTENNA IMPEDANCE MATCHING (ARRL)

Wilfred N. Caron

Proper impedance matching of an antenna to a transmission line is of concern to antenna engineers and to every radio amateur. A properly matched antenna as the termination for a line minimises feed-line losses. Power can be led to such a line without the need for a matching network at the line input. There is no mystique involved in designing even the most complex multi-element networks for broadband coverage.
195 pages. £14.50

ANTENNAS AND TECHNIQUES FOR LOW-BAND DXING (ARRL)

John Devoldere ON4UN

This unusual book will be of particular interest to 1.8, 3.5 and 7MHz operators as it's packed with information on antennas and operating tips for 'Top Band to Forty' fans. There are chapters on low band propagation, operating techniques, equipment and for the computer minded there's a chapter on newly-available low band software.
393 pages. £14.50

ANTENNAS FOR VHF AND UHF BP301

I. D. Poole

Antennas are a very important part of any receiver or transmitter and in this book the author gives a general background to antenna operation as well as describing antennas that are suitable for v.h.f. and u.h.f. operation. Chapters include Basic Concepts, Feeders, The Dipole, Aerial Measurements and Practical Aspects. There is something of use for everyone with an interest in antennas in this book.
104 pages. £4.95

ARRL ANTENNA BOOK 17th Edition

This volume now in its 17th edition contains essential information regarding propagation and constructional details of just about every type of antenna known to man. Included is a 3.5" diskette contain in PC programs for Yagi analysis, propagation forecasting, transmission line analysis and other. A definite must.
732 pages. £19.95

ARRL ANTENNA COMPENDIUM Volume One

Fascinating and hitherto unpublished material. Among the topics discussed are quads and loops, log periodic arrays, beam and multi-band antennas, verticals and reduced size antennas.
175 pages. £9.50

ARRL ANTENNA COMPENDIUM Volume Two

Because antennas are a topic of great interest among radio amateurs, ARRL HQ continues to receive many more papers on the subject than can possibly be published in QST. Those papers are collected in this volume.
208 pages. £9.50

ARRL ANTENNA COMPENDIUM Volume Three

Edited by Jerry Hall K1TD

As the title suggests, this book is the third in the continuing series on practical antennas, theory and accessories produced by the ARRL. The book reflects the tremendous interest and activity in antenna work, and provides a further selection of antennas and related projects you can build.
236 pages. £9.50

ARRL ANTENNA COMPENDIUM Volume Four

The fourth volume in the ever popular series contains 38 previously unpublished articles, covering a wide range of antenna related topics - all the way from the maths intensive, heavyweight discussions to fun antennas for specific purposes, such as a balloon supported Field Day loop.

For the first time in the series there is a disk included with the book, which contains source data used to model many of the antennas. In short, there's something for virtually every antenna enthusiast.
204 pages. £14.50

BEAM ANTENNA HANDBOOK

W. I. Orr W6SAI & S. D. Cowan W2LX

Design, construction, adjustment and installation of h.f. beam antennas. The information this book contains has been compiled from the data obtained in experiments conducted by the authors, and from information provided by scientists and engineers working on commercial and military antenna ranges.
268 pages. £7.50

BUILD YOUR OWN SHORTWAVE ANTENNAS 2nd Edition

Andrew Yoder

This practical handbook puts at your fingertips the information you need to build your own short wave antennas. Clear diagrams and photographs show how to construct a variety of inexpensive antennas and masts.
208 pages. £14.95

CUBICAL QUAD ANTENNAS 3rd Edition

William Orr W6SAI & Stuart Cowan W2LX

Sub-titled 'How To Build And Adjust Quads' this book has been rewritten and brought up to date again. The theory of how quad antennas work in easy digestible form. See how to make quad antennas for bands between 10 and 50MHz.
109 pages. £7.50

EXPERIMENTAL ANTENNA TOPICS BP278

H. C. Wright

Experimenting with antennas is a great way to learn. With this author's approach it's also informative and enjoyable.
70 pages. £3.50

G-QRP CLUB ANTENNA HANDBOOK

Compiled and edited by P. Linsley G3PDL & T. Nicholson KA9WRI/GWOLNQ

This book is a collection of antenna and related circuits taken from Sprat, the G-QRP Club's journal. Although most of the circuits are aimed at the low-power fraternity, many of the interesting projects are also useful for general use. Not intended as a text book, but offers practical and proven circuits.
155 pages. £6.99

HF ANTENNA COLLECTION (RSGB)

Edited by Erwin David G4LOI

This book contains a collection of useful and interesting h.f. antenna articles, first published in the RSGB's *Radio Communication* magazine, between 1968 and 1989, along with other useful information on ancillary topics such as feeders, tuners, baluns, testing and mechanics for the antenna builder.
233 pages. £10.99

HF ANTENNAS FOR ALL LOCATIONS (RSGB)

Les Moxon G6XN

This book provides a reference source for all h.f. antenna work, whether it be for fixed, mobile or using test equipment. In effect it is a manual on antenna work, with useful tips, projects and ideas. 322 pages. £13.99

INTRODUCTION TO ANTENNA THEORY BP198

H. C. Wright

This book deals with the basic concepts relevant to receiving and transmitting antennas, with emphasis on the mechanics and minimal use of mathematics. Lots of diagrams help with the understanding of the subjects dealt with. Chapters include information on efficiency, impedance, parasitic elements and a variety of different antennas. 86 pages. £2.95

PRACTICAL ANTENNAS FOR NOVICES

John Heys G3BDQ

In this guide, written especially for newly qualified holders of the UK novice licence, John Heys describes in detail how to build simple but efficient antennas for each of the Novice bands up to 434MHz, as well as useful ancillary equipment to ensure that they are working correctly. A complete chapter is devoted to the safety and common-sense aspects of installing and using a transmitting antenna. This book will be invaluable not only to Novices, but also to any beginning amateur looking for easy-to-build antenna systems that really work.
52 pages. £5.99

PRACTICAL ANTENNA HANDBOOK 2nd Edition

Joseph J. Carr

As the name suggests, this book offers a practical guide to everything to do with antennas, from h.f. to microwaves. It also has sections on propagation, transmission lines, antenna fundamentals and a helpful introduction to radio broadcasting and comm-unication. The book neatly balances a practical approach with the minimum of mathematics, good diagrams and a lively text.
437 pages. £23.95

PRACTICAL WIRE ANTENNAS RSGB

John Heys G3BDQ

Many radio enthusiasts have to be content with wire antennas. John Heys' practical approach to wire antennas provides plenty of ideas and projects to help get the best out of a simple system. A helpful book, and good reference source.
100 pages. £8.50

RADIO AMATEUR ANTENNA HANDBOOK

W. I. Orr W6SAI & S. D. Cowan W2LX

Yagi, Quad, Quagi and LPY beam antennas as well as vertical, horizontal and sloper antennas are covered in this useful book. How to judge the best location, DX antenna height, ground loss and radials.
188 pages. £7.50

RECEIVING ANTENNA HANDBOOK

Joe Carr

Your receiver is only as good as your antenna. This book is a complete guide to high performance receiving antennas. It is a comprehensive examination of antennas intended specifically for receiving purposes. An essential addition to your technical library, the listeners' antenna bible.
189 Pages. £17.50

SIMPLE, LOW-COST WIRE ANTENNAS FOR RADIO AMATEURS

W. I. Orr W6SAI & S. D. Cowan W2LX

Efficient antennas for Top Band to 2m, including 'invisible' antennas for difficult station locations. Clear explanations of resonance, radiation resistance, impedance, s.w.r., balanced and unbalanced antennas are also included.
188 pages. £7.50

W1FB'S ANTENNA NOTEBOOK (ARRL)

Doug DeMaw W1FB

This book provides lots of designs, in simple and easy to read terms, for simple wire and tubing antennas. All drawings are large and clear making construction much easier. There is no high-level mathematics in this book, just simple equations only when necessary to calculate the length of an antenna element or its matching section.
123 pages. £6.95

YAGI ANTENNA DESIGN

Dr James L. Lawson W2PVP

This book is a polished and expanded version of a series of articles first published in *Ham Radio* following on from a series of lectures by the author, who was well-known as the expert on Yagi design. Chapters include simple Yagi antennas, loop antennas, effect of ground, stacking and practical antenna design.
210 pages. £10.95

Beginners (inc RAE)

AMATEUR RADIO FOR BEGINNERS (RSGB)

Victor Brand G3JNB

An ideal book for the absolute beginner to the amateur radio hobby. Well illustrated and an interesting read. 65 Pages. £3.50

AN INTRODUCTION TO AMATEUR RADIO BP257

I. D. Poole

This book gives the newcomer a comprehensive and easy to understand guide through amateur radio. Topics include operating procedures, jargon, propagation and setting-up a station. 150 pages. £3.50

AN INTRODUCTION TO THE ELECTROMAGNETIC WAVE BP315

F. A. Wilson

This little book deals effectively with a difficult abstract subject - the invisible electromagnetic wave. Aimed at the beginner, the book with its basic approach to electromagnetics, antennas, waves, propagation and constraints is a good starting point, complete very simple but clear diagrams and the minimum of mathematics.
122 pages. £4.95

THE BEGINNER'S HANDBOOK OF AMATEUR RADIO 3rd Edition

Clay Laster W5ZPV

This book is a good practical introduction to amateur radio. A variety of constructional projects are included to give the beginner experience in designing and building an amateur radio station. Even includes valves.
398 pages. £17.95

ELECTRONICS SIMPLIFIED - CRYSTAL SET CONSTRUCTION BP92

F. A. Wilson

Especially written for those who wish to take part in basic radio building. All the sets in the book are old designs updated with modern components. It is designed

for all ages upwards from the day when one can read intelligently and handle simple tools.
72 pages. £1.75

ETI BOOK OF ELECTRONICS

Dave Bradshaw
Published in association with *Electronics Today International* magazine, this book is both a theoretical and practical introduction to electronics. It clearly explains the theory and principles of electronics and each chapter includes a project for the beginner to make. The projects a loudspeaker divider, continuity tester, 'brown-out' alarm, freezing alarm, mini-amplifier and burglar alarm.
208 pages. £10.95



HOW TO PASS THE RADIO AMATEURS' EXAMINATION (RSGB)

Clive Smith G4FZH and George Benbow G3HB
The background to multiple choice exams and how to study for them with sample RAE paper for practice plus maths revision and how to study for the exam. The majority of this book is given to sample examination papers so that candidates can familiarise themselves with the examination and assess their ability.
88 pages. £7.99

RAE MANUAL (RSGB)

G.L. Benbow G3HB
The latest edition of the standard aid to studying for the Radio Amateurs' Examination. Updated to cover the latest revisions to the syllabus. Takes the candidate step-by-step through the course.
127 pages. £7.99

RAE REVISION NOTES (RSGB)

G.L. Benbow G3HB
If you're studying for the Radio Amateurs' Examination, this book could be useful. It's a summary of the salient points of the Radio Amateurs' Examination Manual, the standard textbook for the exam. It's A5 size, and therefore can be carried with you wherever you go. Easy-to-read, it's divided into 13 chapters with topics like receivers, power supplies, measurements, operating procedures, licence conditions and a summary of the formulae all dealt with.
92 pages. £4.99

REVISION QUESTIONS FOR THE NOVICE RAE (RSGB)

Esde Tyler G0AEC
In effect Esde Tyler's book could be considered as being a training manual for the NRAE. Answers are supplied and the book provides a useful reference source.
60 pages. £5.00

THE NOVICE LICENCE STUDENT'S NOTEBOOK

John Case GW4HWR
This is the recommended course book for anyone taking the Novice Licence. Covering all aspects of amateur radio and electronics it would be useful to anyone starting out in amateur radio. Every left hand page is for your own notes of explanation.
124 pages. £5.99

SHORTWAVE RADIO LISTENING FOR BEGINNERS

Anita Louise McCormick K8KGI
This book provides all the hands-on information you need to get off to a quick start in short wave listening. An excellent introductory guide, it describes in easy-to-understand non-technical terms how short wave radio works, available equipment and where to find it, what stations can be heard and how to become a licensed radio amateur.
176 pages. £9.95

TRAINING FOR THE NOVICE LICENCE A MANUAL FOR THE INSTRUCTOR (RSGB)

John Case GW4HWR
Aimed at the Novice licence instructor this manual provides the syllabus and an excellent framework textbook to help novice, instructor and beginner alike. An excellent basic reference work.
101 pages. £6.50

W1FB'S HELP FOR NEW HAMS (ARRL)

Doug DeMaw W1FB
This book covers everything from getting acquainted with new equipment to constructing antennas, station layout, interference and operating problems to on-the-air conduct and procedures.
155 pages. £8.95

Callbooks

RADIO AMATEUR CALLBOOK INTERNATIONAL LISTINGS 1995

73rd Edition
The only publication listing licensed radio amateurs throughout the world. Also includes DXCC Countries list, standard time chart, beacon lists and much more.
Over 1400 pages. £20.95

RADIO AMATEUR CALLBOOK NORTH AMERICAN LISTINGS 1995

73rd Edition
Listings of US amateurs (including Hawaii). Also contains standard time chart, census of amateur licences of the world, world-wide QSL bureau, etc.
Over 1400 pages. £20.95

Computing

AN INTRODUCTION TO COMPUTER COMMUNICATIONS BP177

R. A. Penfold
Details of various types of modem and their applications, plus how to interconnect computers, modems and the telephone system. Also networking systems and RTTY.
72 pages. £2.95

ELECTRONIC PROJECTS FOR YOUR PC BP320

R. A. Penfold
102 pages. £3.95


HOW TO EXPAND, MODERNISE AND REPAIR PCs AND COMPATIBLES BP271

R. A. Penfold
Recently revised, this book has seven chapters dealing with IBM PC/ATs or 'clones'. Starting with an overview of PCs and hardware, before describing upgrading disks, video and memory. Three chapters cover repairs, building a PC from bits, and recent developments. A good grounding in PCs.
166 pages. £5.95

INTERFACING PCs AND COMPATIBLES BP272

R. A. Penfold
86 pages. £3.95

PW BOOK SERVICE



(01202) 659930 (24 HOURS)

Internet orders: bookstore@pwpub.demon.co.uk

NEWNES COMPUTER ENGINEER'S POCKET BOOK Third Edition

Michael Tooley
An invaluable compendium of facts, figures, circuits and data which is indispensable to the designer, student, service engineer and all those interested in computer and microcomputer systems. This enlarged third edition covers a vast range of subjects at a practical level, with the appropriate explanatory text.
256 pages. £12.95

PCs MADE EASY. Second Edition

James L. Turley
A friendly, comprehensive introduction to every personal computer - including Macs! This book is packed with valuable tips on every aspect of computer technology available today and will help you to get comfortable with your computer - fast.
438 pages. £15.95

EMC

INTERFERENCE HANDBOOK

William R. Nelson WA6FGG
How to locate & cure EMI for radio amateurs, CBers, TV & stereo owners. Types of interference covered are spark discharge, electrostatic, power line many 'cures' are suggested.
250 pages. £9.50

THE RADIO AMATEUR'S GUIDE TO EMC (RSGB)

Robin Page-Jones G3JWI
This paperback book provides essential information and reading for anyone who has an EMC (interference) problem. With the help of the well-illustrated text and techniques, much of the mystery from the troublesome world of electromagnetic compatibility is removed.
117 pages. £7.99

Historical

1934 OFFICIAL SHORT WAVE RADIO MANUAL

Edited by Hugo Gernsback
A fascinating reprint from a bygone age with a directory of all the 1934 s.w. receivers, servicing information, constructional projects, circuits and ideas on building vintage radio sets with modern parts.
260 pages. £11.60

THE BRIGHT SPARKS OF WIRELESS (RSGB)

G. R. Jessop G6JP
This hardback book is well illustrated with some excellent photographs. It pays tribute to and takes a good look at the personalities behind the early days of amateur radio and the equipment they used. A good read.
90 pages. £12.50

WORLD AT THEIR FINGERTIPS (RSGB)

This book comprehensively covers the fascinating history, techniques, equipment used and personalities behind amateur radio from the very beginnings of the hobby to the late 1960s. John Clarricoats G6CL.
307 pages. £6.00

Maps and Log Books

AMATEUR RADIO LOGBOOK (RSGB)

This standard spirally bound amateur radio log book has 100 pages and is marked out with the format required in the UK. There are columns for date, time (UTC), frequency, power (in dBW), station worked/called, reports, QSL information and remarks. £3.00

NORTH ATLANTIC ROUTE CHART

This is a five-colour chart designed for the ATC in monitoring transatlantic flights. Supplied folded.
740 x 520mm. £6.50

QTH LOCATOR MAP OF EUROPE

This comprehensive map of the European call sign area has now been updated and enhanced. This well thought out, coloured map covers from N. Africa to Iceland and from Portugal in the west to Iran in the east. Folds to fit into the 145 x 240mm clear envelope.
1080 x 680mm. £5.95

RADIO AMATEURS MAP OF THE WORLD

This a brightly coloured map clearly showing call sign prefixes for the world and is up-to-date with recent European boundary changes. Supplied folded in a clear plastic wallet.
980 x 680mm. £5.95

RECEIVING STATION LOG BOOK (RSGB)

£3.50

Microwaves

ARRL UHF/MICROWAVE EXPERIMENTER'S MANUAL

Various Authors
A truly excellent manual for the keen microwave enthusiast and for the budding 'microwaver'. With contributions from over 20 specialist authors. Chapters covering techniques, theory, projects, methods and mathematics. 446 pages. £14.50

MICROWAVE HANDBOOK RSGB

Volumes 1, 2 and 3. Edited By M. W. Dixon G3PFR
Approximately 350 pages (each volume). Vol. 1 costs £9.99. Vol. 2 and 3 cost £14.99 each.

Morse

INTRODUCING MORSE

Collected Articles from PW 1982-1985 48 pages. £1.25

Operating and Handbooks

AMATEUR RADIO TECHNIQUES RSGB

Pat Hawker G3VA
Anyone who enjoys Pat Hawker's 'Technical Topics' in *Radio Communications* will enjoy this book. An amateur radio manual itself, this paperback book, the 7th edition, can only be bettered by a new edition. A truly excellent reference source with a practical bias. 368 pages. £9.50

ARRL HANDBOOK FOR RADIO AMATEURS 1995

This is the 72nd edition of this handbook and contains the best information from previous issues. New for this edition is some information on feedback-loop design for power supplies, a new gel-cell charger project, updates on antenna systems and new coverage of baluns, propagation programs are compared and colour SSTV and telephone FAX machines are also covered. Finally there's a new section on 'for the workbench' with new projects for the reader to build. 1214 pages. £19.95

ARRL OPERATING MANUAL

Another very useful ARRL book. Although written for the American amateur, this book will also be of use and interest to the UK amateur. Topics covered range from short wave listening through operating awards to repeaters, operating and satellites. 684 pages. £12.95

ARRL SPREAD SPECTRUM SOURCEBOOK

Many readers thought an article about spread spectrum communications in the April 1993 PW a spoof, but this book shows the reality of the technique. The ten chapters contain descriptions of the basic theory, the designs, and the techniques involved, and there are basic transceiver building blocks for your experimentation. 360+ pages. £14.50

COMPLETE DX'ER

Bob Locher
This book covers equipment and operating techniques for the DX chaser, from beginner to advanced. Every significant aspect of DXing is covered, from learning how to really listen, how to snatch the rare ones out of the pile-ups and how to secure that elusive QSL card. 204 pages. £7.95

HINTS AND KINKS FOR THE RADIO AMATEUR

Edited by Charles L. Hutchinson and David Newkirk
A collection of practical ideas gleaned from the pages of *QST* magazine. Plenty of projects to build, hints and tips on interference, c.w. and operating and snippets of information from amateurs who've tried and tested the idea. 129 pages. £8.95

MARINE SSB OPERATION

J. Michael Gale
How do you stay in touch when you sail off over the horizon and into the blue? What you need is a single sideband radio, a marine s.s.b. This book explains how the system works, how to choose and install your set and how to get the best out of it. There is also a chapter on amateur radio with the emphasis on the increasingly important maritime mobile nets. 96 pages. £10.95

MARINE VHF OPERATION

J. Michael Gale
A v.h.f. radio/telephone is essential equipment for any sea-going boat, but what can you do with it? Who can you call, and how do you make contact? Which channel do you use, and why? What is the procedure for calling another boat, calling the family through the telephone system, or making a distress call? This book will tell you. 48 pages. £7.95

RADIO COMMUNICATION HANDBOOK (RSGB)

6th Edition
Dick Bidolph G6PDG
This long awaited new edition has been extensively up-dated and is full of diagrams and photographs. This book is a complete handbook/reference work and project book all rolled into one. The final innovation is that the necessary p.c.b. templates for the featured projects are provided at the end of the book making them much easier to work from when making your own p.c.b.s. 750 pages. £20.00

SETTING UP AN AMATEUR RADIO STATION BP300

I. D. Poole
Ian Poole G3YWX provides a helpful guide for anyone setting up an amateur radio station and covers: station design, construction, antenna, equipment, lay-out and the construction and use of basic test equipment, and helpful 'on the air' operating hints. 81 pages. £3.95

Packet

PRACTICAL GUIDE TO PACKET OPERATION IN THE UK

Mike Mansfield G6AWD
Introduces the concept of packet radio to the beginner. Problem areas are discussed and suggestions made for solutions to minimise them. Deals with the technical aspects of packet taking the reader through setting up and provides a comprehensive guide to essential reference material. 220 pages. £9.95

PACKET: SPEED, MORE SPEED AND APPLICATIONS (ARRL)

There is a lot to see, learn and do with packet. You don't need to be a 'guru' to join in the fun. This collection of articles and updates from ARRL, *Computer Networking Conference Proceedings*, TAPR's *Packet Status Register*, *QEX*, *QST* and the *ARRL Handbook* promises an exciting ride for both packeteers and future packeteers. Hang onto your seat and start-up your modem! 144 pages. £12.95

YOUR GATEWAY TO PACKET RADIO

Stan Horzepa WA1LOU
What is packet radio good for and what uses does it have for the 'average' amateur? What are protocols? Where, why, when? Lots of the most asked questions are answered in this useful book. It included details of networking and space communications using packet. 278 pages. £8.95

YOUR PACKET COMPANION

Steve Ford WB8IMY
This American book goes to considerable lengths to explain in simple terms how the radio amateur can get going on packet, how it works and what the various systems are. There are chapters dealing with assembling a packet station, sending and receiving packet mail and exploring advanced networking systems. Your Packet Companion goes a long way to explain some of the mysteries of packet radio. 170 pages. £5.95

Propagation

AN INTRODUCTION TO RADIO WAVE PROPAGATION BP293

J.G. Lee
How does the sun and sunspots affect the propagation of the radio waves which are the basis of our hobby? They affect the ionosphere, but differing frequencies are

treated differently. Find out how to use charts to predict frequencies that will be the most profitable. What effect will noise have on the signal? Find out with this book. 116 pages. £3.95

LOW PROFILE AMATEUR RADIO - OPERATING A HAM STATION FROM ALMOST ANYWHERE (RSGB)

Jim Kearman KR1S

This book delves into the techniques of being a 'hidden Ham'. There are chapters on specialised equipment, operating techniques and antennas to name but a few. If you have a fascination for spy type radio equipment or like the idea of having a complete h.f. or v.h.f. rig built in a suitcase, then this little American book is for you. 124 pages. £5.95

SPACE RADIO HANDBOOK (RSGB)

John Branegan GM4IHJ
236 pages. £12.50

QRP

G-QRP CLUB CIRCUIT HANDBOOK

Edited by Rev. G. Dobbs G3RJV

This paperback book has been compiled from circuits published in the G-QRP Club journal *Spart* from the years 1974 to 1982. Essentially it's a collection of circuits and projects covering everything from receivers, transmitters, antennas and accessories together with set QRP test equipment. This book is aimed at the keen constructor and provides all the information required to build the host of projects described. 96 pages. £8.50

QRP CLASSICS (ARRL)

Edited by Bob Schetgen

Operating QRP is fun. The equipment is generally simple and easy to build, but often performs like more sophisticated commercial equipment. Some QRP Field Day stations operate a full 27 hours on a car battery - it's the perfect equipment for emergency communication when the power fails. Extracts from QST and the ARRL Handbook. 274 pages. £9.95

W1FB's QRP NOTEBOOK (ARRL)

2nd Edition. Doug De Maw W1FB

The new improved and updated 2nd edition of this book, covers the introduction to QRP, construction methods, receivers and transmitters for QRP. This workshop-notebook style publication, which is packed with new designs for the keen QRP operator, also covers techniques, accessories and has a small technical reference section. 175 pages. £7.95

GETTING THE MOST FROM YOUR MULTIMETER BP239

R. A. Penfold

This book is primarily aimed at beginners. It covers both analogue and digital multi-meters and their respective limitations. All kinds of testing is explained too. No previous knowledge is required or assumed. 102 pages. £2.95

HANDS-ON GUIDE TO OSCILLOSCOPES

Barry Ross

Covers all aspects of oscilloscope use. This book is aimed at the novice and assumes a minimum of previous knowledge and should be of use to engineers, scientists and electronic enthusiasts alike. If you have an oscilloscope this book is a must. 228 pages. £17.95

HOW TO USE OSCILLOSCOPES & OTHER TEST EQUIPMENT BP267

R. A. Penfold

Hints and ideas on how to use the test equipment you have, to check out, or fault find on electronic circuits. Many diagrams of typical waveforms and circuits, including descriptions of what waveform to expect with particular faults, or distortion in audio amplifiers. 104 pages. £3.50

MORE ADVANCED TEST EQUIPMENT CONSTRUCTION BP249

R. A. Penfold

A follow on from Test Equipment Construction (BP248) this book looks at digital methods of measuring resistance, voltage, current, capacitance and frequency. Also covered is testing semi-conductors, along with test gear for general radio related topics. 102 pages. £3.50

MORE ADVANCED USES OF THE MULTIMETER BP265

R. A. Penfold

This book is primarily intended as a follow-up to BP239. Getting the most from your Multi-meter. By using the techniques described in this book you can test and analyse the performance of a range of components with just a multi-meter (plus a very few inexpensive components in some cases). The simple add-ons described extend the capabilities of a multi-meter to make it even more useful. 96 pages. £2.95

PRACTICAL TRANSMITTERS FOR NOVICES

John Case GW4HWR

This book contains a selection of 'easy to build' transmitter designs which are suitable for the UK Novice bands (including microwaves). Although the book is primarily aimed at Novices it should also interest any amateur who is building transmitters for the first time. Chapters include: Methods of construction, Amplifiers and Filters. Tools and how to use them and Suppliers of components and many more. 126 pages. £9.00

TEST EQUIPMENT FOR THE RADIO AMATEUR

Clive Smith G4FZH

In its 3rd edition, this book provides many up-to-date test equipment project designs for the radio amateur, complete with p.c.b. template (in the rear of the book). Areas covered include: current and voltage measurements, oscilloscopes, frequency, r.f., antenna and transmission line measurements. 170 pages. £9.00

VHF

ALL ABOUT VHF AMATEUR RADIO

W. I. Orr W6SAI

Written in non-technical language, this book provides information covering important aspects of v.h.f. radio and tells you where you can find additional data. If you have a scanner, you'll find a lot of interesting signals in the huge span of frequencies covered, 100-300MHz & 50, 420, 902 & 1250MHz bands. 163 pages. £5.50

AN INTRODUCTION TO VHF/UHF FOR RADIO AMATEURS BP281

I.D. Poole

An excellent book to go with the new Novice or full call sign. Nine chapters and an appendix deal with all aspects and frequencies from 50 to 1300MHz. Topics include propagation, descriptions of the bands, antennas, receivers, transmitters and a special chapter on scanners. 102 pages. £5.50

VHF UHF MANUAL (RSGB)

G. R. Jessop G6JP

The 4th edition of this well known book is in paperback form. Packed with

information for the world of radio above 30MHz. It covers everything, from v.h.f./u.h.f. radio history and theory and propagation to projects and techniques. An excellent reference source. Approximately 1000 pages. £10.50

ELECTRONICS

50 (FET) FIELD EFFECT TRANSISTOR PROJECTS BP39

FG Rayer

50 circuits for the s.w.l., radio amateur, experimenter or audio enthusiast using f.e.t.s. Projects include r.f. amplifiers and converters, test equipment and receiver aids, tuners, receivers, mixers and tone controls. 104 pages. £2.95

A REFERENCE GUIDE TO BASIC ELECTRONICS TERMS BP286

F. A. Wilson

As its title suggests, this book covers the basic terms involved in electronics and with its short, clear and precise explanations is a helpful guide and useful textbook for the beginner and anyone preparing for an examination. 472 pages. £5.95

A REFERENCE GUIDE TO PRACTICAL ELECTRONICS TERMS BP287

F. A. Wilson

A reference guide laid out in alphabetic order with an index, this book provides a useful source for the experienced and beginner alike. 431 pages. £5.95

AUDIO ELEMENTS OF ELECTRONICS - BOOK 6 BP111

F. A. Wilson

This book studies sound and hearing, and examines the operation of microphones, loudspeakers, amplifiers, oscillators, and both disk and magnetic recording. Intended to give the reader a good understanding of the subject without getting involved in the more complicated theory and mathematics. 308 pages. £3.95

BEGINNERS GUIDE TO MODERN ELECTRONIC COMPONENTS BP285.

R. A. Penfold

This book covers a wide range of modern components. The basic functions of the components are described, but this is not a book on electronic theory and does not assume the reader has an in-depth knowledge of electronics. It is concerned with practicalities such as colour codes, deciphering code numbers and suitability. 166 pages. £3.95

CIRCUIT SOURCE BOOK 1 - BP321

R. A. Penfold

Written to help you create and experiment with your own electronic designs by combining and using the various standard 'building block' circuits provided. Deals with filters, amplifiers, voltage comparators, etc. 182 pages. £4.95

CIRCUIT SOURCE BOOK 2 - BP322

R. A. Penfold

Complimentary to Circuit Source Book 1, helps you create and experiment with your own electronic designs by combining and using the various standard 'building block' circuits provided. Covers signal generation, power supplies and digital electronics, etc. 214 pages. £4.95

FILTER HANDBOOK - A Practical Design Guide

Stefan Niewiadomski

A practical book, describing the design process as applied to filters of all types. Includes practical examples and BASIC programs. Topics include passive and active filters, worked examples of filter design, switched capacitor and switched resistor filters and includes a comprehensive catalogue of pre-calculated tables. 195 pages. £30.00

NEWNES AUDIO AND HI-FI ENGINEER'S POCKET BOOK Second Edition

Vivian Capel

A concise collection of practical and relevant data for anyone working on sound systems. The topics covered include microphones, gramophones, compact discs, tape recording, high quality radio, amplifiers, loudspeakers and public address. 210 pages. £10.95

NEWNES ELECTRONICS ENGINEER'S POCKET BOOK

Keith Brindley

This convenient sized volume is packed with information which everyone involved in electronics will find indispensable. This book is an invaluable compendium of facts, figures and formulae. Managers, designers, students and service personnel will find it useful at all stages in electronics processes. 306 pages. £10.95

POWER SUPPLY PROJECTS BP76

R. A. Penfold

This book gives a number of power supply designs including simple unregulated types, fixed voltage regulated types and variable voltage stabilised designs. 89 pages. £2.50

PRACTICAL ELECTRONIC FILTERS BP299

Owen Bishop

A useful introduction to the complex world of filters and their design where the author avoids the mathematical approach. The theory of filters, their design and a information on dozen or so practical projects are provided. 189 pages. £4.95

PRACTICAL ELECTRONICS HANDBOOK

Ian Sinclair

"The best value handbook on electronics you can buy", so claims the sleeve notes of the 4th edition. They're not far off the mark either. The volume covers a wide range of disciplines. These include passive and active discrete components, i.c.s both analogue and digital including A/D and D/A. Microprocessor and systems. Much reference data is also included. A book worthy of space in your library. 439 pages. £13.95

TEST EQUIPMENT CONSTRUCTION BP248. R.A. Penfold

Describes, in detail, how to construct some simple and inexpensive, but extremely useful, pieces of test equipment. Stripboard layouts are provided for all designs, together with wiring diagrams where appropriate, plus notes on their construction and use. 104 pages. £2.95

W1FB's DESIGN NOTEBOOK (ARRL)

Doug DeMaw W1FB

This book is aimed at the non-technical amateur who wants to build simple projects

and obtain a basic understanding of amateur electronics. Your workshop does not need to be equipped like an engineering lab to be successful as an experimenter. Don't let a lack of test equipment keep you from enjoying the thrills of experimentation. 195 pages. £8.50

Data

ARRL ELECTRONICS DATA BOOK

Doug DeMaw W1FB

Back by popular demand, completely revised and expanded, this is a handy reference book for the r.f. designer, technician, amateur and experimenter. Topics include components and materials, inductors and transformers, networks & filters, digital basics and antennas and transmission lines. 260 pages. £8.95

ELECTRON TUBE LOCATOR

George H. Fathauer

Published by Antique Electronic Supply (Arizona)

A spirally bound (opening flat) style book, this should prove to be of great interest to valve collectors, historians and anyone trying to identify particular valves. The author provides a comprehensive list of American and British Service valves and 'civilian' equivalents and the valve base details are provided, with description of valve type and although there's no comprehensive valve characteristic information, the filament voltages and currents are given in a clear and precise style. Ideal for the researcher and collector. 350 pages. £19.95

ESSENTIAL CHARACTERISTICS (TUBES & TRANSISTORS)

(Original Publishers General Electric)

Re-published by Antique Electronic Supply (Arizona)

This stiff covered, novel-sized paperback facsimile book is printed on good paper and is packed throughout with information, and connection details (base pin charts) on receiving valves, special purpose valves, cathode ray tubes, thyatrons, vidicons and many others (including semiconductor). Highly recommended as a valve reference book. 475 pages. £9.95

FURTHER PRACTICAL ELECTRONICS CALCULATIONS & FORMULAE BP144

F. A. Wilson 450 pages. £4.95

NEWNES PRACTICAL RF HANDBOOK

Ian Hickman

This book provides an easy-to-read introduction to modern r.f. circuit design. It's aimed at those learning to design r.f. circuitry and users of r.f. equipment such as signal generators and sweepers, spectrum and network analysers. 320 pages. £16.95

PRACTICAL ELECTRONICS CALCULATIONS AND FORMULAE BP53

F. A. Wilson

Written as a workshop manual for the electronics enthusiast, there is a strong practical bias and higher mathematics have been avoided where possible. 249 pages. £3.95

PRACTICAL ELECTRONIC DESIGN DATA BP316

Owen Bishop

In essence this book is a helpful collection of designer's 'building block' circuits, information, connection data and back-up information complete with an index. 327 pages. £4.95

RADIO AMATEUR AND LISTENER'S DATA HANDBOOK

Steve Money

This is a unique collection of useful and intriguing data for both the traditional and modern radio amateur as well as the high-tech listener. Familiar radio topics are covered - abbreviations and codes, symbols, formulae and frequencies - while the newer features of the hobby radio world - decoding, airband, maritime, packet, slow scan TV, etc. are also dealt with 240 pages. £14.95

RCA RECEIVING TUBE MANUAL

(Original Publishers Radio Corporation Of America)

Re-published by Antique Electronic Supply (Arizona)

This novel-sized stiff covered paperback book is absolutely fascinating for anyone interested in valves! In reality it's a designer's handbook with potted details, characteristic curves, information and descriptions of typical applications for each valve listed. It's even got a section showing receiver circuits and applications. Excellent reading and reference. 384 pages. £9.95

RCA TRANSMITTING TUBES

(Original Publisher Radio Corporation of America)

Re-published by Antique Electronic Supply (Arizona)

This is a stiff covered paperback novel-sized book. And if you've got an interest in transmitting with valves...this is a useful reference source for valves up to 4kW input. The RCA authors have included some interesting practical circuits using their valves, including some for s.s.b., v.h.f. and others. Highly recommended reference source. 318 pages. £9.95

Projects

COIL DESIGN AND CONSTRUCTION MANUAL BP160

B.B. Babani 106 pages. £2.50

HOW TO DESIGN AND MAKE YOUR OWN PCBs BP121

R. A. Penfold

The purpose of this book is to familiarise the reader with both simple and more sophisticated methods of producing p.c.b.s. The emphasis of the book is very much on the practical aspects of p.c.b. design and construction. 66 pages. £2.50

MORE ADVANCED POWER SUPPLY PROJECTS BP192

R. A. Penfold

The practical and theoretical aspects of the circuits are covered in some detail. Topics include switched mode power supplies, precision regulators, dual tracking regulators and computer controlled power supplies, etc. 92 pages. £2.95

PROJECTS FOR RADIO AMATEURS AND SWLS BP304

R. A. Penfold

This small book covers the construction and use of radio frequency and intermediate frequency projects, and audio frequency projects. Under the first heading ideas include a crystal calibrator, an antenna tuning unit, a wave trap, a b.f.o. and other useful projects. On the audio side projects include a bandpass filter, a by-pass switch, a c.w./RTTY decoder and many other practical ideas and suggestions for the home constructor. 92 pages. £3.95

SHORT WAVE SUPERHET RECEIVER CONSTRUCTION BP276

R. A. Penfold

A general purpose receiver to build, from antenna to audio, described in understandable English. 80 pages. £2.95

SIMPLE SHORT WAVE RECEIVER CONSTRUCTION BP275

R. A. Penfold

Before discussing projects and techniques, the author provides essential information on theory, propagation, receiver designs and techniques. Finally, the author provides design for and describes the construction of practical receivers. 88 pages. £3.95



(01202) 659930 (24 HOURS)

Internet orders: bookstore.pwpub.demon.co.uk

ENDNOTES

Like everyone else on the *PW* Editorial team I have my share of sub-editing to do. I always enjoy the job (I wouldn't work in journalism if I didn't!) but occasionally I have an exceptionally fascinating article to work on. This month that job was 'subbing' G3SED's 'DXpertise With Devereux'.

Mike's article on his adventures with the Camel Trophy Team was a fascinating read and a joy to prepare. In particular, I felt I could share Mike's thrill at hearing old friends from the UK when he was in exotic DX locations. I hope you enjoyed his article as much as I did!


Altogether, I think this month's selection of DX related articles have proved most interesting. And now that Chris Page G4BUE has offered his advice on 'Breaking The 100 Barrier' to get that coveted 'Honor Roll'...perhaps you'll be encouraged to have a go!

On to a personal note now, and it's in the form of a 'thank you' to the many readers who responded to my comments on my interests in railways (including trams!). And although my idea for a 'railway' Net isn't going to get off the ground, many readers wrote to me on the subject.

I was also contacted by old friends from the British Rail Amateur Radio Society, of which I'm proud to say that I was a founding member. They reminded me of their activities and Nets. So, if you're interested in joining an existing Net where railways are the core subject, drop me a line.

And don't forget, if you ever want to join me (whenever I can get on the band!) I can often be heard on around 3.720MHz (\pm QRM) anytime (UK 'clock' time) after 7pm. I'd be delighted to work friends old and new.

The times I'm on the band should also satisfy those stations who were concerned I would 'interfere' with their own specialised 'Net'. They've no need to worry...my aim is to encourage the hobby, not to cause bad feeling. By the time I appear (if I do!) they've finished for the evening.

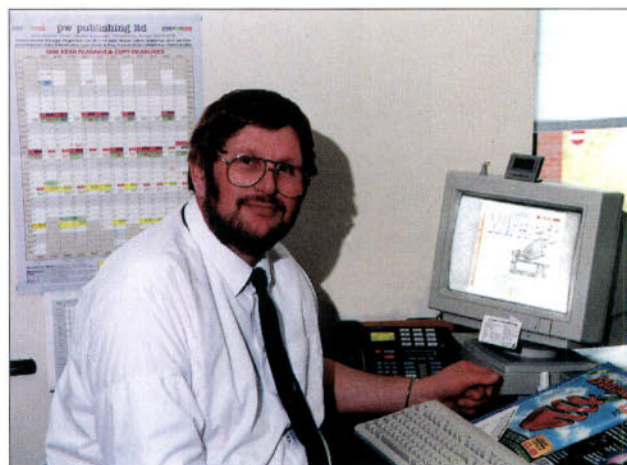

Finally on railways & radio I'd like to especially thank Ben Nock G4BXD for the superb photographs he sent me of the locomotives on the Welshpool & Llanfair Railway in Wales, and also Bruce McCartney GM4BDJ for the (autographed) copy of his book *The Railway To Langholm*. Thanks Bruce (the illustrated story of this Scottish Borders Railway is fascinating!).

Bruce McCartney also sent photographs of narrow gauge railways he saw on a visit to Lithuania. There was a great deal of Amateur Radio interest and I suggest that if you've had an interesting holiday, exchange visit or organised tour abroad meeting other enthusiasts, your story could make an interesting article for *PW*.

The more we meet our friends abroad, the more truly international our hobby becomes. So, before you go on holiday again, ask us for a *PW Author's Guide*...and you could share your holiday experiences with other readers and further extend the hand of friendship.

Next month, as the dark evenings draw in, *PW* is spending some time on the workbench and using/building some interesting test equipment. So, dust off that multimeter and prepare your bench. We're going to be busy!

Rob G3XFD

PW SERVICES

Queries:

Practical Wireless,
PW Publishing Ltd.,
Arrowsmith Court,
Station Approach,
Broadstone,
Dorset BH18 8PW.

We will always try to help readers having difficulties with *Practical Wireless* projects, but please note the following simple rules:

- 1: We **cannot** deal with technical queries over the telephone.
- 2: We **cannot** give advice on modifications either to our designs, to commercial radio, TV or electronic equipment.
- 3: All letters asking for advice **must** be accompanied by a stamped self-addressed envelope (or envelope plus IRCs for overseas readers).
- 4: Make sure you describe the problem adequately, with as much detail as you can possibly supply.
- 5: Only one problem per letter please.

Back Numbers

Limited stocks of many issues of *PW* for past years are available at £2.00 each including post and packing. If the issue you want is not available, we can photocopy a specific article at a cost of £1.50 per article or part of article. Over the years, *PW* has reviewed many items of radio related equipment. A list of all the available reviews and their cost can be obtained from the Editorial Offices at Arrowsmith Court, Station Approach, Broadstone, Dorset BH18 8PW for a large stamped self-addressed envelope.

Binders

PW can provide a choice of binders for

readers' use. Plain blue binders are available, each holding 12 issues of any similar A4 format magazine. Alternatively, blue binders embossed with the *PW* logo in silver can be supplied. The price for either type of binder is £5.50 each (£1 P&P for one, £2 for two or more). Send all orders to PW Publishing Ltd., FREEPOST, Arrowsmith Court, Station Approach, Broadstone, Dorset BH18 8PW.

Constructional Projects

Components for *PW* projects are usually readily available from component suppliers. For unusual or specialised components, a source or sources will be quoted. Each constructional project is given a rating to guide readers as to the complexity.

Beginner: A project that can be tackled by a beginner who is able to identify components and handle a soldering iron.

Intermediate: A fair degree of experience of building radio or electronic projects is assumed, but only basic test equipment will be needed to complete any tests and adjustments.

Advanced: A project likely to appeal to the experienced constructor. Access to workshop facilities and test equipment will often be required. Definitely not for the beginner to attempt without assistance.

Mail Order

All items from *PW* are available Mail Order, either by post or using the 24hr Mail Order Hotline (01202) 659930. Payment should be by cheque, postal order, money order or credit card (Mastercard and Visa only). All payments **must** be in sterling and overseas orders **must** be drawn on a London Clearing Bank.

COMING NEXT MONTH IN DECEMBER'S PW!

COME AND JOIN PW IN THE SHACK NEXT MONTH WHEN WE OPEN THE DOORS TO OUR 'WORKSHOP & TEST EQUIPMENT SPECIAL'.

REVIEW

You can't miss this 'display'! - Richard Newton G0RSN reviews the Alinco DJ-191 144MHz hand-held transceiver. It's Alinco's answer to easier hand-held operating.

'Start Here....' Elaine Richards G4LFM takes a break from 'Novice Natter' to help you set up a workshop.

Mike Rowe G8JVE has some further ideas on the popular *PW* Robin frequency Counter



Workshop Worries? - No Problem! - Ben Nock G4BXD says that being 'disabled' shouldn't put you off home-brewing and describes his own techniques to encourage you to get busy on the bench.

DON'T MISS IT! - ON SALE NOVEMBER 9 - PLACE YOUR ORDER TODAY!

YOUR LOCAL DEALERS

SURREY
Chris Rees
G3TUX
The QRP Component Company
 PO Box 88 Haslemere Surrey GU27 2RF
 Tel: (01428) 641771
 Fax: (01428) 661794
Stockists of:
 ✓ Howes Kits ✓ Jones Keys
 ✓ Vargarda Aerials
 ✓ Bits n' pieces! © Lists

MID GLAMORGAN
SANDPIPER COMMUNICATIONS
 Unit 5, Enterprise House, Cwmbach Industrial Estate, Aberdare, Mid Glamorgan CF44 0AE
 Tel: (01685) 870425
 Fax: (01685) 876104
 A full range of transmitting & receiving antennas available for the amateur commercial market.

YORKSHIRE
 YAESU
 ICOM
 Kenwood
Alan Hooker
Radio Communications
 42, Netherhall Road, Doncaster
 Tel: (01302) 325690
 Open Mon-Sat 10-5 pm
 Closed Thursdays

LONDON
Locate Communications Ltd
 23 BOUSFIELD ROAD, NEW CROSS, LONDON SE14 5TP
Independent Radio Engineers
 We can maintain any of the following systems:- amateur radio equipment, mobile radio systems and IBM PC/Clone computers
 Tel: 0171-732 8319
 Fax: 0171-652 5796

KENT
WANTED
 We BUY and SELL quality used Amateur Radio's
 Send an SAE for our list or telephone for a quote on your unwanted equipment.
 COLLECTION & DELIVERY SERVICE AVAILABLE.
KP Trading, Seaview House
 Crete Road East, Folkestone CT18 7EG
 Tel/Fax 01303 891106
 (KP Trading is a subsidiary of KANGA PRODUCTS)

SCOTLAND
JAYCEE ELECTRONICS LTD
 20 Woodside Way, Glenrothes, Fife KY7 5DF
 Tel: (01592) 756962 (Day or Night)
 Fax No. (01592) 610451
 Open: Tues-Fri 9-5; Sat 9-4
 KENWOOD, YAESU & ICOM APPROVED DEALERS
 A good stock of new and secondhand equipment always in stock

KENT
KANGA PRODUCTS
For QRP kits
 A variety of kits for RECEIVERS, TRANSMITTERS & TEST GEAR.
 Send an A5 SAE for a free copy of our catalogue
 Seaview House, Crete Road East
 Folkestone, CT18 7EG
 Tel/Fax (01303) 891106 0900 - 1900 Only

SCOTLAND
TENNAMAST
SCOTLAND
 Masts from 25ft - 40ft
 Adapt-A-Mast
 (01505) 503824
 81 Mains Road, Beith, Ayrshire, KA15 2HT

NORTHWEST
ARC Ltd.
Everything for the radio amateur under one roof!
 36 Bridge Street, Earlestown, Newton-le-Willows, Merseyside WA12 9BA
Tel: 01925 229881
Fax: 01925 229882

C.B. RADIO
RETAIL
 SEND LARGE STAMPED ADDRESSED ENVELOPE FOR INFORMATION OR £2.99 FOR CATALOGUE
TRADE
 MANUFACTURERS/IMPORTERS OF ALL MOONRAKER PRODUCTS
 TRADE ENQUIRIES WELCOME. **MOONRAKER**
 MOONRAKER (UK) LTD, UNIT 12, CRANFIELD ROAD UNITS, CRANFIELD ROAD, WOBURN SANDS, BEDFORDSHIRE MK17 8QR
 TEL (01908) 281705 FAX (01908) 281706

AVON/SOMERSET
QSL COMMUNICATIONS
 We stock all makes of equipment for the Amateur and Listener.
 Part Exchange Welcome
 Unit 6 Worle Industrial Centre, Coker Road, Worle, Western-Super-Mare BS22 0BX
 Tel/Fax: (01934) 512757

SOUTHAMPTON
SMC Ltd
 Main Dealer for: Yaesu, Kenwood, Icom AOR & Cushcraft
 SM House, School Close, Chandlers Ford Industrial Estate, Eastleigh, Hampshire SO5 3BY
 Tel: (01703) 255111
 Fax: (01703) 263507

The international group for all **WEATHER SATELLITE enthusiasts**

RIG publishes a quarterly journal containing many images from space, some in colour. Orbital elements and predictions. Articles about the interpretation of weather images, equipment construction and software and all the news of weather satellites.
RIG supplies (to members only): receivers etc. at a discount, shareware of relevant programs, images on disk and CD-ROM.
 Send for free Information Pack (UK readers SAE please) to:-
 RIG-P4, PO Box 142, RICKMANSWORTH, Herts WD3 4RQ, England.

ELECTRONICS VALVES & SEMICONDUCTORS
 Phone for a most courteous quotation
081-743 0899
Fax: 081-749 3934
 We are one of the largest stockists of valves etc, in the U.K.
COLOMOR (ELECTRONICS) LTD.
 170 GOLDHAWK ROAD
 LONDON W12 8HJ

Index to Advertisers

Aerial Techniques	66	J Birkett.....	66	QRP Component Co.	60
AH Supplies.....	66	Kenwood.....	5	QSL Comms	53
Altron Comms.....	57	Lake Electronics	66	Quartslab	77
Chevet Books	66	Langrex Supplies	60	RAS Nottingham.....	66
Cirkit.....	4	Leicester ARS	41	RSGB.....	29
Coastal Comms.....	53	Lentini Comms.....	66	SGC	4
Colomor Electronics	77	Lowe Electronics.....	6/7	Short Wave Magazine	26
Cricklewood Electronics.....	77	Maplin Electronics.....	cover iv	Siskin Electronics.....	49
Datong Electronics.....	57	Martin Lynch	38/39	SMC Ltd	2/3
EARS	77	Mauritron Technology	67	Spectrum Comms.....	67
Eastern Comms.....	24	Monitoring Times	24	Suredata	67
Haydon Comms	14/15	Nevada Comms	22/23	Tennamast	67
Holdings Amateur Electronics.....	77	North Wales Radio Rally	60	Venus Electronics.....	67
Howes, CM	49	PCB Service	60	Waters & Stanton	8
Icom UK	cover iii	Photo Acoustics	57	Yaesu UK.....	cover ii
Interconnections	49	PW Publishing.....	44		

IC-775DSP

The whole world's going digital and ICOM are no exception... read on

There can be no doubt as to the amazing clarity of digital audio, well ICOM have now introduced this technology into their latest HF transceiver, and boy what a result!:

- Excellent SSB Tx signals that analog simply cannot compete with are produced by signal control at modulation stage.
- Digital noise-reduction at demodulation stage gives crystal clear signals, digital technology working for the serious DX'er.
- Twin Passband tuning shifts centre frequencies on 455kHz and 9MHz separately or together.
- CW Reverse mode flips carrier point from USB to LSB..
- Manual IF Notch gives great frequency characteristics and attenuation of more than 45dB.
- Manual Audio Peak Filter.
- Noise Blanker and adjustable AGC.
- 200 watts output power from MOS-FET finals.
- Newly developed mixer-less PLL to improve DDS system.
- 1Hz tuning, 3 grade selectivity high performance Rx and much more!



ICOM manufacture a full range of base-stations, mobiles and handheld transceivers and receivers to cover all popular Ham frequencies... and beyond. No matter what your requirements, ICOM have the radio for you.

For the full picture and details of your local authorised Icom dealer contact:
Icom (UK) Ltd. Sea Street Herne Bay Kent CT6 8LD.

General Operator: 01227 743000. Sales & Service: 01227 741741. Fax: 01227 741742.

With over 14,000 products the new Maplin Catalogue is now bigger than ever



THE EIFFEL TOWER

Built in 1889 by Alexandre Gustave Eiffel, the Eiffel Tower is 984 feet high and gives an unrivalled view of the whole of Paris.




THE NEW MAPLIN CATALOGUE

Built for 1996 by Maplin, the new catalogue is almost 1,200 pages long and gives an unrivalled view of the whole world of electronics.

Now Only £2.95



JUST LOOK AT THESE SUPERB EXAMPLES!

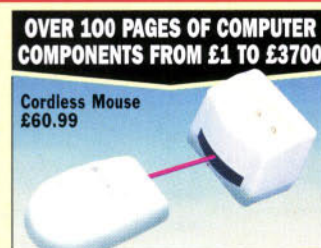

Get your copy now from WHSMITH, John Menzies and Maplin stores nationwide
Or order direct NOW on 01702 554161

Catalogue Mail order Price £3.45 (inc p&p). Prices refer to the 1996 Maplin Catalogue and are inclusive of VAT.
All items are subject to availability. E&OE. Maplin Electronics, P. O. Box 3, Rayleigh, Essex, England SS6 8LR.