

**This camera manual library is for reference and historical purposes, all rights reserved.**

**This page is copyright by mike@butkus.org M. Butkus, N.J.**

**This page may not be sold or distributed without the expressed  
permission of the producer**

**I have no connection with any camera company**

**If you find this manual useful, how about a donation of \$3 to: M. Butkus, 29 Lake Ave., High Bridge, NJ 08829-1701 and send your E-mail address too so I can thank you. Most other places would charge you \$7.50 for a electronic copy or \$18.00 for a hard to read Xerox copy. These donations allow me to continue to buy new manuals and maintain these pages. It'll make you feel better, won't it?**

**If you use Pay Pal, use the link below. Use the above address for a check, M.O. or cash. Use the E-mail of butkusmi@ptd.net for PayPal.**



**[back to my "Orphancameras" manuals /flash and light meter site](#)**

**Only one "donation" needed per manual, not per multiple section of a manual !**


**The large manuals are split only for easy download size.**

# PHOTOGRAPHIC TECHNIQUES




## EXPOSURE METERING SYSTEMS


### Matrix Metering and 75/25 Center-Weighted Metering

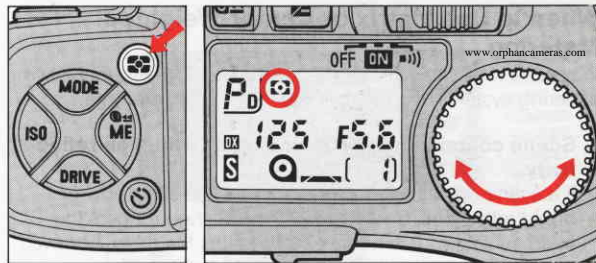Nikon N8008 features two types of exposure metering systems, Matrix and Center-Weighted. In Matrix Metering, the meter automatically provides the main subject with correct exposure in any lighting situation, without having to use manual exposure compensation. The Matrix Metering sensor consists of five segments and determines scene brightness by dividing the scene into five areas, analyzing each area for (1) brightness and (2) scene contrast. According to these key data, the scene is classified into one of 25 matrix "boxes", each containing one or more algorithm patterns. Depending on other scene information, the N8008 chooses the appropriate algorithm. For times when you want to do it yourself, select Center-Weighted Metering. This overrides Matrix Metering and concentrates 75% of the meter's sensitivity in the center of the viewfinder, outlined by a 12mm circle.



### Metering System Selection

1. Slide main switch to ON or .
2. While pressing metering mode button, rotate command dial.
3. Confirm Matrix Metering mark  or Center-Weighted Metering mark  appears in the LCD panel.

For lenses without built-in CPU, the metering system is automatically set to Center-Weighted. If set to Matrix Metering,  blinks.

## When to Use Matrix or Center-Weighted Metering

In scenes with both very bright and very dark areas, these two metering systems produce varying results. For example:

### 1. Scene containing the sun or scenes with high reflectivity

If a scene contains highlights, such as the sun, snow or bright reflections, Center-Weighted Metering renders the main subject as a silhouette. With Matrix Metering, however, the light value of darker parts is evaluated, resulting in an overall well-balanced exposure.


### 2. Outdoor backlit subject

With Center-Weighted Metering, a backlit subject or scene with people against a bright sky and/or clouds may lead to an underexposed shot. With Matrix Metering, however, the camera automatically gives more exposure to dark subjects to ensure a correct overall exposure.

### 3. Front-lit subject against dark background

If a brightly lit off-center subject is positioned against a dark background, Center-Weighted Metering places too much emphasis on the dark center of the picture. So although the background is correctly exposed, the main subject will be overexposed. Matrix Metering, however, automatically integrates a dark background with a bright subject to ensure the best overall exposure.

Scene containing the sun

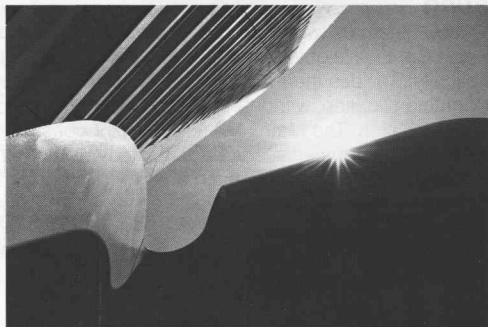

Matrix Metering



Center-Weighted Metering

**Outdoor backlit subject**



**Matrix Metering**



**Center-Weighted Metering**

**Front-lit subject**



**Matrix Metering**



**Center-Weighted Metering**

#### 4. Small dark subjects against a bright background

A subject significantly smaller than any of the Matrix Metering sections may not be recognized and integrated into the automatic exposure evaluation. For such subjects, use AE Lock or Center-Weighted Metering with manual exposure compensation.



Center-Weighted Metering (w/AE Lock)



Matrix Metering



Center-Weighted Metering (w/o AE Lock)

## 5. Sunset scenes

When you want to emphasize a dramatic sunset but don't want Matrix Metering to lighten the scene for a dark foreground subject, use AE Lock or Center-Weighted Metering.



Matrix Metering






Center-Weighted Metering



# EXPOSURE COMPENSATION

## In Automatic Exposure Modes

### AE (Auto Exposure) Lock Lever

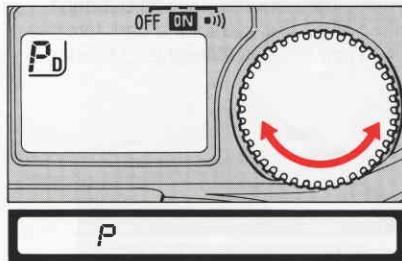


1. Set exposure mode to Programmed (PD, P, PH), Shutter-Priority Auto (S) or Aperture-Priority Auto (A).

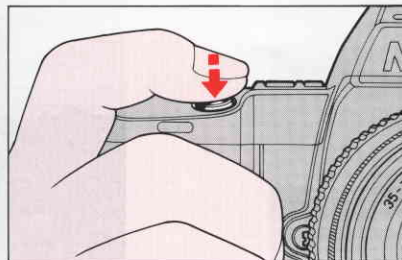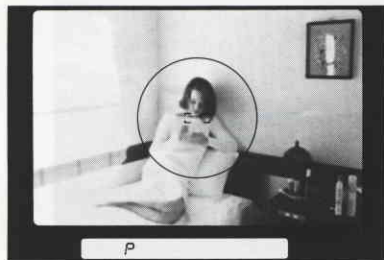


2. Center main subject inside viewfinder or move in closer.


3. Lightly press shutter release button, and confirm shutter speed and aperture in the viewfinder.

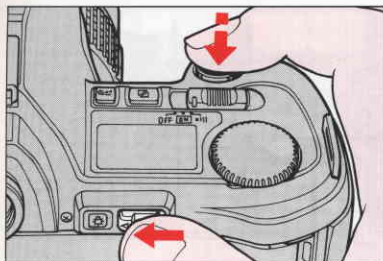

4. While lightly pressing shutter release button, slide AE Lock lever and hold in.

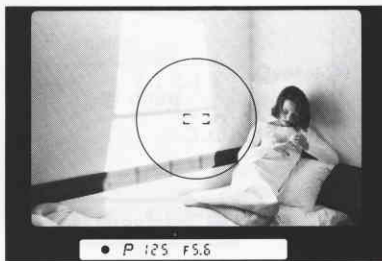


5. Recompose and shoot.

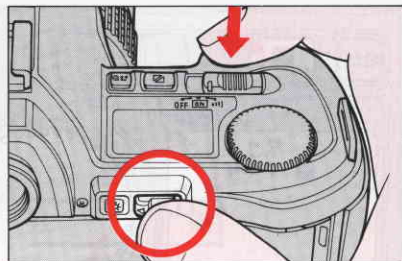

- In Single Servo AF mode, before releasing shutter, be sure to refocus by briefly removing your finger from shutter release button and lightly pressing again to reactivate autofocus function.
- Center-Weighted Metering system is recommended.
- When using AE Lock lever, beeper does not sound for exposure.



## Exposure Compensation Button

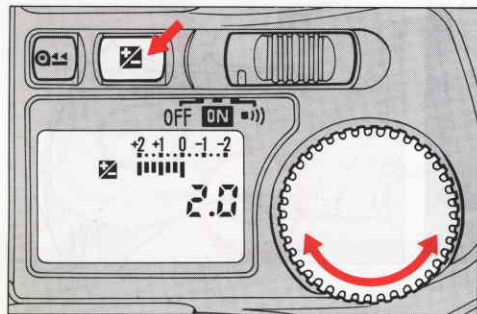

2.0 +2.0 1.0 0.0 -1.0 -2.0

Using the exposure compensation button, you can compensate exposure within the range of  $\pm 5\text{EV}$ .

While pressing exposure compensation button, rotate the command dial to set desired compensation value. The following display appears in the LCD panel and viewfinder:

☒ mark

Electronic Analog Display with indications from  $-2$  to  $+2$  EV in 1/3 steps


Compensation value (from  $-5$  to  $+5$  EV in 1/3 steps)

- ☒ mark stays on during compensation, but compensation value and Electronic Analog Display disappear after you remove finger from exposure compensation button. To confirm compensation value, press button again.
- Once set, exposure compensation remains fixed until set again.
- Exposure compensation can also be achieved by setting film speed manually. See page 21.

(In Center-Weighted Metering)













Without compensation




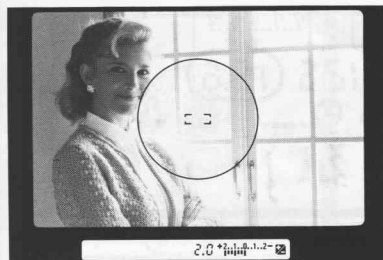


+2EV compensation

Examples:






## In Manual Exposure Mode

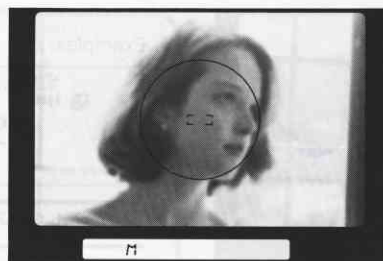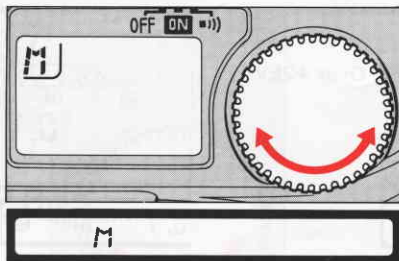

1. Set exposure mode to Manual (M).



2. Center main subject inside viewfinder, and lightly press shutter release button.

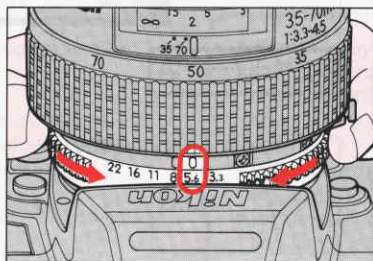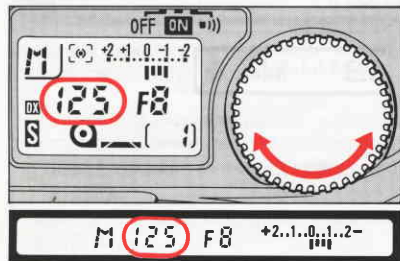

3. Adjust shutter speed and aperture until the Electronic Analog Display indicates 0 or desired exposure.




4. Confirm shutter speed and aperture in the viewfinder.

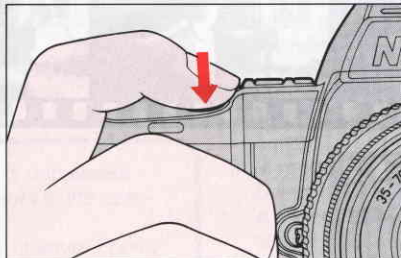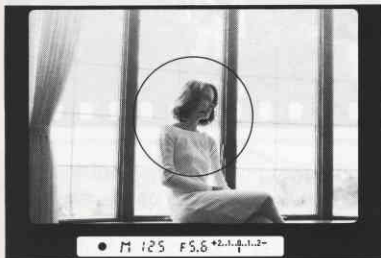


5. Recompose and shoot.

## Auto Exposure Bracketing

By attaching the optional Nikon Multi-Control Back MF-21 to the N8008 you can take advantage of auto exposure bracketing to produce a variety of exposures for the same subject, each one suiting specific needs and/or tastes. This lets you shoot up to 19 continuous frames, each with a different exposure. For details, see the MF-21 instruction manual.

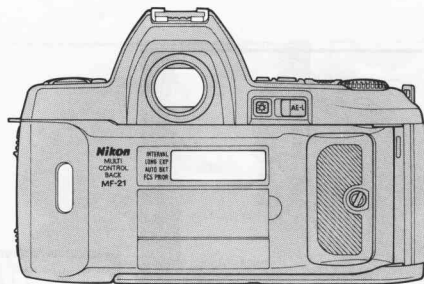

## DEPTH-OF-FIELD PREVIEW BUTTON

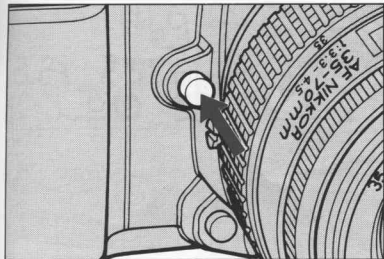

When a lens with an automatic diaphragm is used, the viewfinder image is viewed with the lens at maximum aperture. By depressing the depth-of-field preview button however, the lens is stopped down to the aperture set, enabling you to examine depth of field before shooting. The viewfinder image normally darkens as the aperture gets smaller. Those portions of the picture that appear in focus when the button is pushed down are in the zone of sharpest focus.

While the depth-of-field preview button is depressed, shutter speed disappears and F-- appears in the aperture position. Shutter locks. Depth of field can only be previewed in Aperture-Priority Auto (A) or Manual (M) exposure modes.

## Stop-Down Exposure Metering

### For lenses without automatic diaphragm

When the automatic diaphragm ring does not couple with the meter coupling lever of the camera, such as when using a PC-Nikkor or bellows attachment, focusing should be done with the lens wide open while exposure measurement and shooting must be done with the lens stopped down.

#### In A mode:

Take a shot with the lens stopped down. With a PC-Nikkor, correct exposure must be determined before **shifting**. To do this, first use the AE Lock, then the lens can be shifted to take the shot.

#### In M mode:

Stop down the lens to determine the correct exposure, then take the shot.

### For lenses with fixed aperture

Because aperture is fixed when using Reflex-Nikkor lenses, for photomicrography or for telescopic photography, it is impossible to change the exposure by varying the aperture.


#### In A mode:

Take the shot by simply depressing the shutter release button.

#### In M mode:


Select the appropriate shutter speed for correct exposure. If a correct exposure cannot be obtained, use either an ND filter (if the scene is too bright) or supplementary illumination (if too dark).

## SELF-TIMER

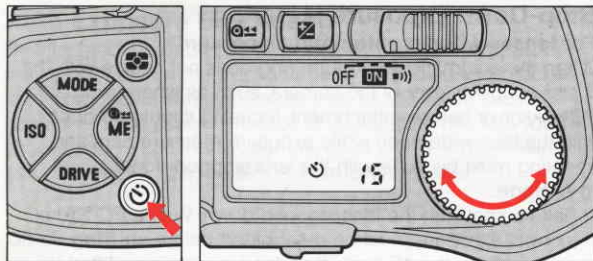


Using the self-timer activates autofocus and auto exposure operation.

1. Slide power switch to ON or ).
2. While pressing self-timer button , rotate command dial to set desired timer duration.  
Timer duration can be selected between 2 to 30 seconds in one second increments.
3. Confirm self-timer mark and timer duration in the LCD panel.

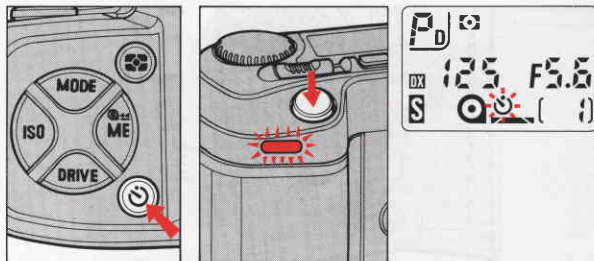


4. Compose picture and confirm focus and exposure.
5. While pressing self-timer button, fully depress shutter release button.  
Self-timer LED starts blinking, beeper will sound (if set) and self-timer indicator blinks. For the final two seconds, the blinking LED and beeper speed up, telling you to get ready.

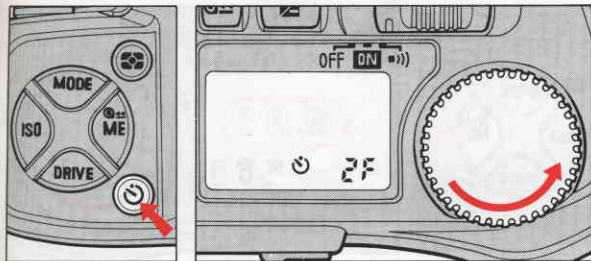

## Two-Shot Self-Timer

It is possible to take two consecutive self-timer pictures. While pressing the self-timer button, rotate the command dial counterclockwise until "2F" appears at the timer duration position in the LCD panel. In consecutive self-timer shooting, the shutter is released for the first shot after approx. 10 sec., and the second shot is taken 5 sec. later.

- To cancel self-timer after activating, press self-timer button again.
- In self-timer operation, shutter is released whether subject is in focus or not, even in Single Servo Autofocus mode.
- In self-timer operation, when focus mode is set to either Single Servo Autofocus or Continuous Servo Autofocus, lightly pressing the shutter release button activates autofocus operation.
- Exposure is locked when self-timer operation starts.
- In Programmed, Shutter-Priority, or Aperture-Priority Auto exposure mode, use eyepiece cover DK-8 (provided) to prevent stray light from entering the viewfinder and affecting exposure.






- Regardless of film advance mode setting, continuous-frame shooting is not possible (except for two-shot self-timer operation).




## MULTIPLE EXPOSURE PHOTOGRAPHY

Multiple exposures are created by taking pictures of different subjects or successive pictures of one subject on the same frame. Up to 9 exposures can be set, using a variety of exposure techniques.

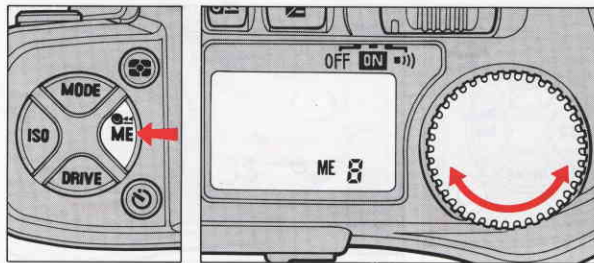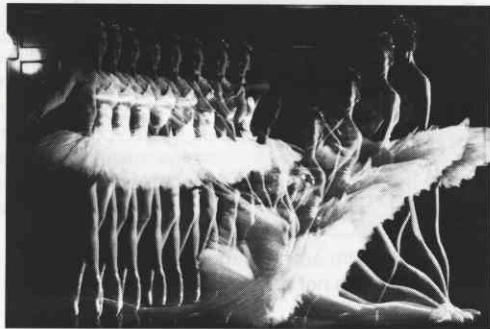

1. Slide power switch to ON or .
2. While pressing multiple exposure button (ME), rotate command dial to set desired number of exposures.
3. Confirm multiple exposure indication "ME" and number of exposures in LCD panel.

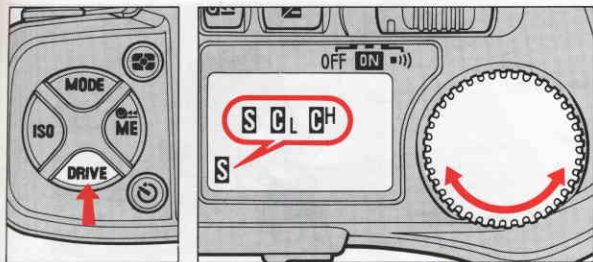


4. While pressing film advance mode button, rotate command dial to select S, CL or CH.

**ME-S:** For single exposure at one shutter release.


**ME-C (CH or CL mode):** For multiple exposures at a single shutter release.

Compose picture, confirm focus and exposure, and fully depress shutter release button. The exposures number indication in the LCD panel counts down with each exposure.

"ME" mark blinks during multiple exposures.




- In ME-C mode, exposures are taken continuously as long as the shutter release button is fully depressed. To stop shooting, remove finger from the button.
- When multiple exposure is complete, film automatically advances to next frame and multiple exposure is cancelled.
- To cancel multiple exposure midway, while pressing the multiple exposure button, rotate the command dial until no number shows. Film advances when you remove finger from the button.

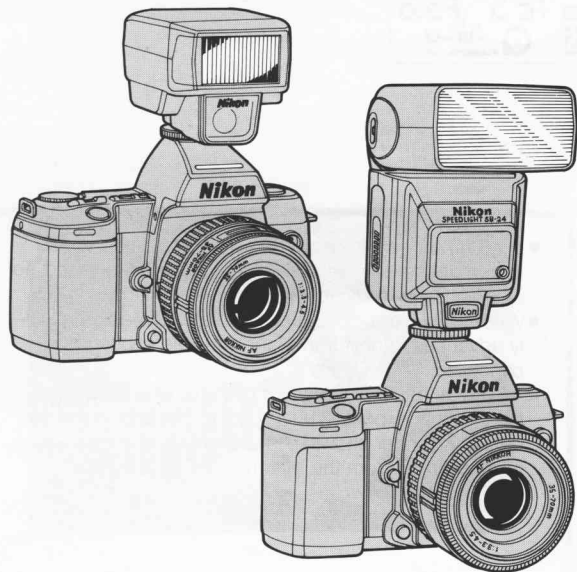

Matrix Balanced Fill-Flash in daylight



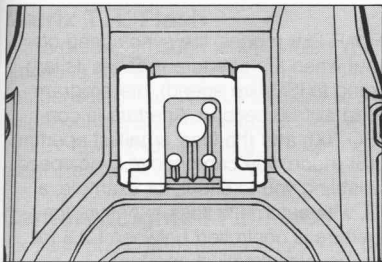

Matrix Balanced Fill-Flash at night



The Nikon N8008's accessory shoe lets you directly mount a wide range of Nikon dedicated electronic speedlights, including SB-24, SB-23, SB-22, SB-20, SB-18, SB-16B and SB-15. Each unit takes full advantage of the N8008's fine tuned cybernetic controls, which automatically synchronize the camera's shutter and lens aperture to provide precisely controlled exposures. This means you can perform Cybernetic Sync Flash in TTL mode in every flash shooting situation, for beautiful, naturally balanced foregrounds and backgrounds with a truly professional look.

Cybernetic Sync Flash lets you choose any of the four different flash categories shown, matching your speedlight TTL mode with the appropriate metering system and exposure mode.

<div></div>		Speedlight setting	SB-24 at TTL 	SB-23/22/20/ 18/16B/15 at TTL	SB-24 at TTL 
Metering system	Exposure mode				
Matrix Metering	PD/P/PH/S/A	Matrix Balanced Fill-Flash			Matrix TTL Flash
	M				
Center- Weighted Metering	PD/P/PH/S/A	Center-Weighted Fill-Flash			Center- Weighted TTL Flash
	M				

## Matrix Balanced Fill-Flash

When taking flash pictures, although the subject is usually well illuminated, background lighting can vary dramatically. This is especially true when the main subject is very close, and the background is relatively dark or only moderately bright.

Matrix Balanced Fill-Flash balances both the subject and background illumination, automatically. How? Matrix Metering adjusts for the background and the TTL flash exposure level, so the flash illumination is balanced and won't overpower the foreground subject. This creates a natural and pleasing effect, filling in harsh shadows and bringing out subject detail without losing the correct background exposure.

This system operates automatically: based on a combination of general scene brightness and contrast, the exposure value for the background is determined by one of five computation methods: Low-Brightness Weighted, Center-Segment, Average, High-Brightness Weighted, or Very-High-Brightness Weighted. Flash exposure value is controlled in a similar way. The combination of ambient light and flash light is balanced to produce a natural and pleasing effect.

In Programmed Auto (PD, P, PH) modes, the sync speed of 1/250 sec. has priority, but when the aperture reaches its largest limit (variable according to ISO film speed), the program line fixes the shutter speed at 1/60 second. Aperture is controlled between f/4 (at ISO 100) and the lens' smallest aperture. In Shutter-Priority Auto (S) mode, you can choose sync speeds from 1/250 to 30 sec., enabling you to shoot, for example, a city-scape of night lights, with automatic flash exposure for foreground subjects. Aperture is controlled between f/2.8 (at any ISO film speed) and the lens' smallest aperture.

In Aperture-Priority Auto (A) mode, you select aperture and the camera selects a suitable sync speed, within a range of 1/60 to 1/250 sec. (at any ISO film speed).

With Manual (M), you control both aperture and shutter speed while the flash exposure is determined by scene brightness and contrast, with Matrix Balanced Fill-Flash control throughout. In S and M modes, when you select a shutter speed faster than 1/250 sec. and then turn the flash unit ON, the N8008 automatically shifts to 1/250 sec.

## Matrix TTL Flash

In this mode, although Matrix Metering ensures the background is correctly exposed, the flash level is not automatically compensated. Matrix TTL Flash lets you manually select flash output compensation (on the SB-24) at levels from 1 EV higher to 3 EV lower than standard TTL flash output, for greater personal creativity.

## Center-Weighted Fill-Flash

For flash photography in ordinary TTL, or to emphasize detailed background areas, use Center-Weighted Fill-Flash. In this mode, when value measured by center segment is within controlled shutter speed/aperture range, flash output compensation is automatically set 2/3 EV lower than standard TTL flash output, for natural fill-flash photography. (If the value is less than that of the controlled range, standard TTL flash without compensation is selected.)





## Center-Weighted TTL Flash

For Center-Weighted Metering without automatic flash output compensation, choose Center-Weighted TTL Flash. This mode lets you choose your own desired level of compensation (on the SB-24), from +1 to -3 EV.


Nikon speedlight SB-24 lets you take advantage of a special photographic technique called rear-curtain sync flash. For details, see page 68.

## Shutter Speed/Aperture and Flash Mode Combinations for Each Exposure Mode

**In Matrix Metering** (With 50mm f/1.4 lens at ISO 100)

Speedlight  Expo- sure mode	SB-24					SB-23/22/20/18/16B/15	
	Front-curtain sync			Rear-curtain sync		TTL	Non-TTL auto Manual
	TTL 	TTL 	Non-TTL auto Manual	TTL 	TTL 		
<b>PD P PH</b>	1/60–1/250 f/4–f/16 (1)	1/60–1/250 f/4–f/16 (1)	P, FEE blink Shutter locks Select A or M	30″-1/250 f/4–f/16 (1)	30″-1/250 f/4–f/16 (1)	1/60–1/250 f/4–f/16 (1)	P, FEE blink Shutter locks Select A or M
<b>S</b>	As set (3) f/2.8–f/16 (2)	As set (3) f/2.8–f/16 (2)	S, FEE blink Shutter locks Select A or M	As set (3) f/2.8–f/16 (2)	As set (3) f/2.8–f/16 (2)	As set (3) f/2.8–f/16 (2)	S, FEE blink Shutter locks Select A or M
<b>A</b>	1/60–1/250 As set	1/60–1/250 As set	1/60–1/250 As set (4)	30″-1/250 As set	30″-1/250 As set	1/60–1/250 As set	1/60–1/250 As set (5)
<b>M</b>	As set (3) As set	As set (3) As set	As set (3) As set (4)	As set (3) As set	As set (3) As set	As set (3) As set	As set (3) As set (5)

 : Matrix Balanced Fill-Flash (background correctly exposed; TTL flash level automatically compensated)

 : Matrix TTL Flash (background correctly exposed; standard TTL flash)

- (1) Maximum usable aperture varies according to film speed in use; minimum aperture is the smallest aperture of the lens in use.
- (2) Maximum usable aperture is f/2.8; minimum aperture is the smallest aperture of the lens in use.
- (3) When set from 1/250 to 1/8000 sec., the shutter is automatically set to 1/250 sec.
- (4) Recommended background exposure is displayed. Extra flash level compensation not possible.
- (5) Recommended background exposure is displayed. Normal flash control.


**Note:** When N8008 shifts from Matrix to Center-Weighted metering, Matrix Balanced Fill-Flash becomes Center-Weighted Fill-Flash (only center segment data is considered; flash level automatically compensated by  $-2/3$ EV within controlled shutter speed/aperture range; if less than this range, standard TTL flash is automatically selected), and Matrix TTL Flash becomes Center-Weighted TTL Flash (only center segment data is considered; standard TTL flash selected).

- Usable film speed for TTL flash photography is ISO 25-1000; for non-TTL flash photography, it is 6-6400.
- For details on speedlight operation, see the speedlight instruction manual.
- Use Nikon Speedlights. Other units may damage the camera's electrical circuit due to incompatible voltage requirements, electric contact alignment or switch phase.
- When using a special speedlight with a time-lag provision or when using a speedlight with a long flash duration (i.e., Nikon Repeating Flash SB-6 at 1/2 or full output or Medical-Nikkor 120mm f/4), adjust shutter speed down to 1/125 sec. or slower.
- When using a speedlight that does not allow automatic sync speed setting, set the camera's exposure mode to Manual.




## Matrix Balanced Fill-Flash Operation


The following instructions are for Matrix Balanced Fill-Flash shooting in Programmed (PD, P, PH) mode, the easiest way for normal shooting. For other exposure or TTL modes, or for non-TTL auto and manual flash shooting, see your speedlight instruction manual.

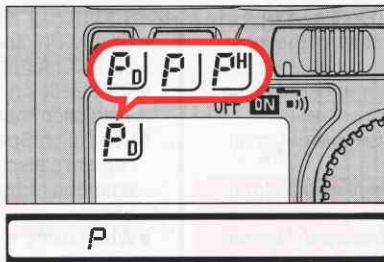


1. Set the N8008 to P DUAL, P or P HI mode.

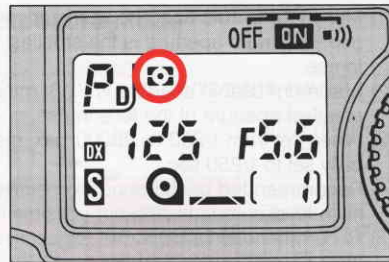


2. Set the N8008 to Matrix Metering system.

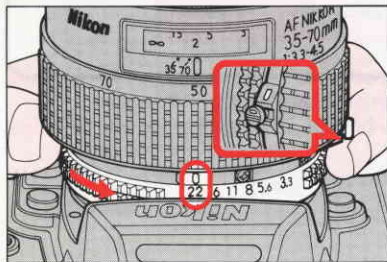


3. Set lens to its minimum aperture (largest f-number).

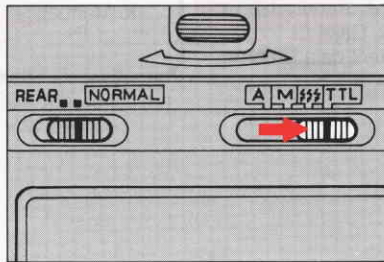

4. Set speedlight's mode selector to TTL. (With SB-24, set flash sync mode selector to NORMAL.)


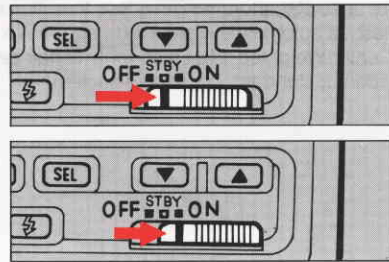


5. Turn the speedlight on. (With SB-24, TTL mark appears in the LCD panel.)

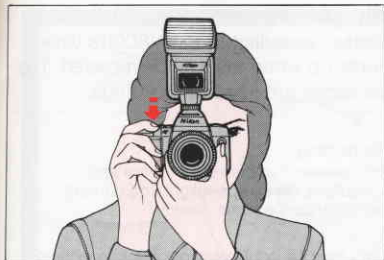

6. Look inside the viewfinder and lightly press the shutter release button. (With SB-24, angle of coverage is automatically adjusted.)

- When ready-light comes on but ambient light is insufficient for autofocus operation, AF illuminator turns on to start autofocus operation.

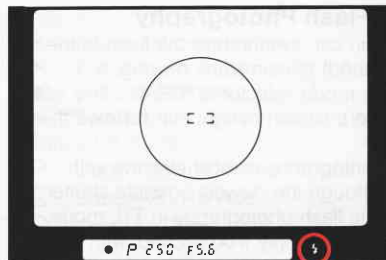

7. With the ready-light and in-focus indicator LCD on, as long as you have none of the following warning indications, you can shoot.

<b>HI appears:</b>	Overexposure alert.
<b>F-- appears:</b>	Non-CPU lens is used. Exposure mode is automatically set to A, and metering system to Center-Weighted.
<b>FEE appears:</b>	Lens is not set to minimum aperture. Shutter locks.

- If the ready-light blinks for a few seconds after shooting, move closer to the main subject or select a wider aperture by setting the camera to A or M exposure mode. For flash shooting distance range, see the speedlight instruction manual.

## Rear-curtain Sync Flash Photography

When using the SB-24, you can synchronize the flash to the instant when the rear (second) curtain starts moving. Set the SB-24's flash sync mode selector to "REAR". This lets you turn available light into a stream of light that **follows** the flash illuminated subject.

Rear-curtain sync flash photography is most effective with slower shutter speeds. Although the slowest possible shutter speed for front-curtain sync flash photography in TTL mode, with camera at PD, P, PH or A, is only 1/60 second, with rear-curtain sync flash photography, you can slow the shutter down to 30 seconds, depending on background.


## Ready-Light Warnings

When using Nikon dedicated speedlights, the N8008's viewfinder ready-light LED lights up when the flash is recycled. The following ready-light indications are used for warnings:

<b>Before shooting:</b> <b>⚡ disappears</b> <b>⚡ blinks</b>	Recharging Poor connection between camera and speedlight. (Keep speedlight and camera electrical connections clean.)
<b>After shot:</b> <b>⚡ blinks</b>	Light may be insufficient for correct exposure; confirm shooting distance range.




Rear-curtain sync



Front-curtain sync

# VIEWFINDER INFORMATION

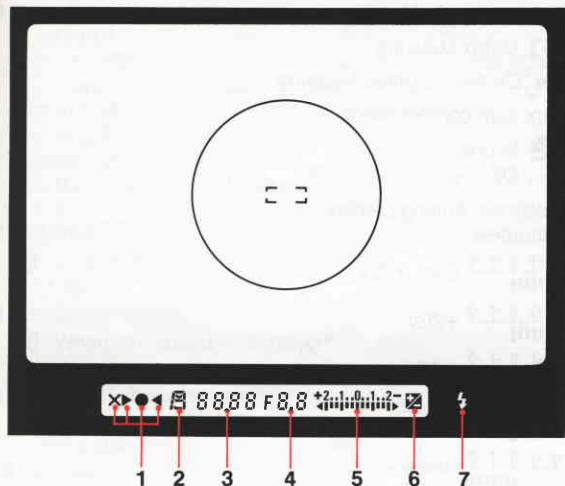

## 1 Focus

- ✕ Focus-not-possible alert
- ▶ Focus-to-right arrow – for too distant subject
- In-focus indicator
- ◀ Focus-to-left arrow – for too near subject

## 2 Exposure mode

- P Dual Program/Normal Program/High-speed Program
- S Shutter-Priority Auto
- A Aperture-Priority Auto
- M Manual

## 3 Shutter speed/film speed

Same as LCD panel.

## 4 Aperture/exposure compensation value

Same as LCD panel.


## 5 Electronic Analog Display

Same as LCD panel.

## 6 Exposure compensation mark

Same as LCD panel.

## 7 Ready-light LED

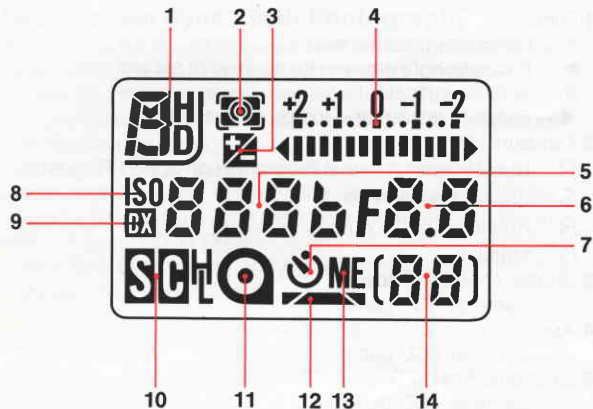

## 1 Exposure mode

- P** Dual Program
- S** Shutter-Priority Auto
- A** Aperture-Priority Auto
- M** Manual
- P<sup>H</sup>** High-speed Program
- P** Normal Program

## 2 Exposure metering system

- Matrix Metering
- Center-Weighted Metering

## 3 Exposure compensation

- In use
- Off

## 4 Electronic Analog Display

Examples:

Over +2EV

+2EV

±0EV

-2/3EV

Below -2EV

## 5 Shutter speeds

buLb-30"-15"-8"-4"-2"-1"-2-4-8-15-30-60-125-250-500-1000-2000-4000-8000

## Alert indications

HI, Lo, Err

## Film speeds

6-8-10-12-16-20-25-32-40-50-64-80-100-125-160-200-250-320-400-500-640-800-1000-1250-1600-2000-2500-3200-4000-5000-6400

## 6 Aperture settings

F1-F1.4-F2-F2.8-F4-F5.6-F8-F11-F16-F22-F32-F45-F64

\* An intermediate figure may appear in the case of a lens' maximum aperture value.

### Alert indications

FEE, F--, HI, Lo

### Exposure compensation values

0.0-0.3-0.7-1.0-1.3-1.7-2.0-2.3-2.7-3.0-3.3-3.7-4.0-4.3-4.7-5.0

## 7 Self-timer



In operation

— Off

## 8 Film speed setting

**ISO** When film speed is displayed

— Not displayed

## 9 DX-coded film speed setting



DX position selected

— Not selected

## 10 Film advance mode



Single



Continuous Low



Continuous High

## 11 Film installation



Installed

— Not installed

## 12 Film advance and rewind



Correctly loaded



Loading now



Rewinding

## 13 Multiple exposure



In operation

— Off

## 14 Frame counter

[E]-[0]-[1]-[2]-[3]-[4]-.....-[24]-.....-[36]-.....-[72]-.....-[99]

Self-timer duration

2-3-4-.....-28-29-30-2F

Number of multiple exposures

2-3-4-.....-8-9

Nikon N8008 is designed for autofocus photography with AF Nikkor lenses. However, most other Nikon lenses can be used for standard photography according to the conditions listed in the following chart.

## Lens Compatibility Chart

	Focusing		Exposure mode				Metering system	
	Autofocus	Manual w/electronic range finder	Programmed Auto	Shutter-Priority Auto	Aperture-Priority Auto	Manual	Matrix Metering	Center-Weighted
AF Nikkor lenses	○	○	○	○	○	○	○	○
AI-P type Nikkor lenses	<sup>1</sup> △	<sup>1</sup> △	○	○	○	○	○	○
AI-type Nikkor lenses (including AI-S)	<sup>1</sup> △	<sup>2</sup> △	×	×	○	○	×	○
AI-modified Nikkor lenses	×	<sup>2</sup> △	×	×	○	○	×	○
Medical-Nikkor 120mm f/4	×	○	×	×	<sup>5</sup> ×	<sup>5</sup> △	×	○
Reflex Nikkor lenses	×	×	×	×	<sup>6</sup> ○	<sup>6</sup> ○	×	○
PC-Nikkor lenses	×	×	×	×	<sup>7</sup> △	<sup>7</sup> △	×	○
Teleconverters TC-16A	<sup>1</sup> ○	<sup>3</sup> △	×	×	<sup>8</sup> △	<sup>8</sup> △	×	○
Teleconverters (except TC-16A)	×	<sup>4</sup> △	×	×	<sup>8</sup> △	<sup>8</sup> △	×	○
Bellows Focusing Attachment PB-6	×	×	×	×	<sup>9</sup> △	<sup>9</sup> △	×	○
Auto Extension Rings	×	<sup>4</sup> △	×	×	○	○	×	○

○ Compatible

△ Compatible as per conditions

×

## ACCESSORY COMPATIBILITY

- 1 With maximum effective aperture of f/5.6 or faster when using TC-16A Autofocus Converter.
- 2 With maximum aperture of f/5.6 or faster. (Unless PC-Nikkor lenses are **shifted**.)
- 3 Manual focusing not possible.
- 4 With maximum effective aperture of f/5.6 or faster.
- 5 With shutter speed set to 1/125 sec. or slower. Flash necessary.
- 6 Aperture cannot be selected.
- 7 Exposure determined by presetting lens aperture. Exposure must also be determined before **shifting**; in A mode, use AE Lock lever before shifting.
- 8 If maximum aperture of master lens is faster than aperture selected, exposure compensation is necessary. See instruction manual.
- 9 Shutter should be released after exposure is measured by stopping down PB-6.

The following accessories cannot be used with the Nikon N8008.

- \* Close-up Attachments PK-1 — 3, PN-1, K-2, BR-2
- \* Body Cap BF-1
- \* Eyepiece Accessories for F3HP/F3T

- PK-1, PK-11, BR-4 and K-1 Rings cannot be mounted directly on AF Nikkor lenses.
- Filters with a large exposure factor may affect the camera's Matrix Metering. Use Center-Weighted Metering.
- Polarizing filters cannot be used for autofocus or auto exposure; use circular polarizing filter only.
- Special filters, such as soft focus filters, cannot be used for autofocus or for manual focus with electronic range finder.




# INTERCHANGEABLE FOCUSING SCREENS

In addition to the advanced B-type BriteView screen supplied with the N8008, two other interchangeable optional screens are available to match your subject.


**Type E:** Clear Matte/Fresnel with focusing brackets and grid.  
Suited for copying and architectural photography.

**Type J:** Clear Matte/Fresnel with micropism.


Be sure not to touch the focusing screen or reflex mirror with your fingers.

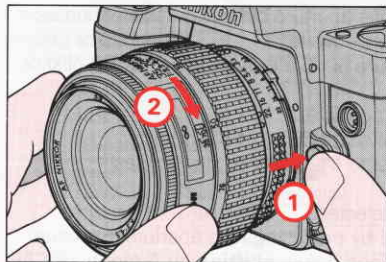


1. Remove the lens.

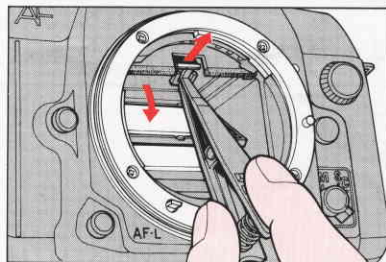


2. Slip the tip of the special tweezers (provided with optional screens) under the focusing screen release latch and pull outward to spring open the holder.

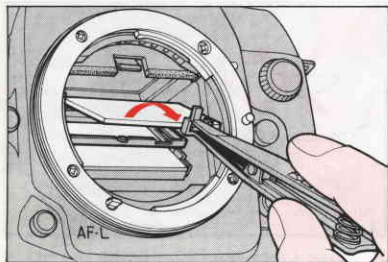


- 3.** Remove the screen by grasping the small tab with the tweezers.

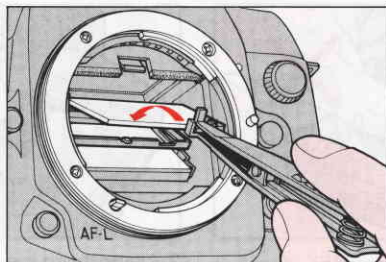


- 4.** Carefully position the replacement screen in place, making sure the flash side is facing down.

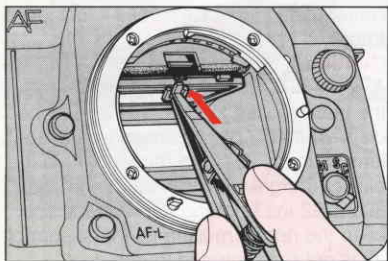


- 5.** Using the tweezers, push the front edge of the holder upward until it clicks into place. An improperly placed focusing screen causes unreliable focus information in the viewfinder.

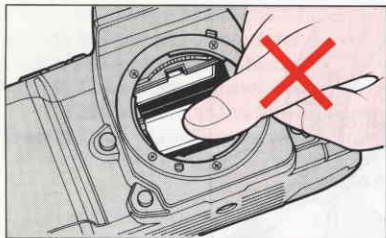


1. Never touch the reflex mirror or focusing screen. Remove dust with a blower brush.

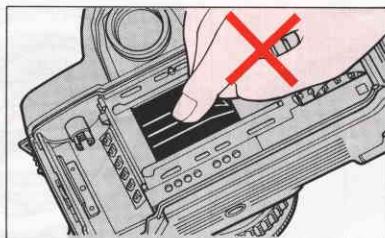


2. Never touch the shutter curtains.

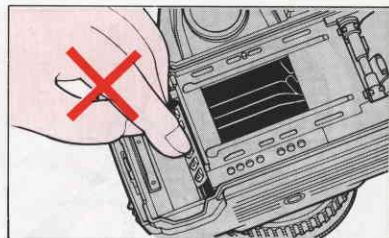

3. Never touch the DX contacts. Keep clean with blower brush.

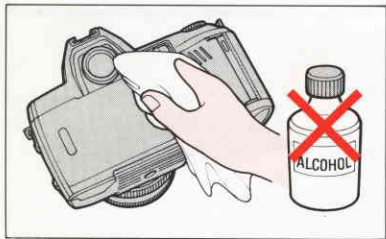

7. Clean the viewfinder eyepiece with a soft, clean cloth. Do not use alcohol.

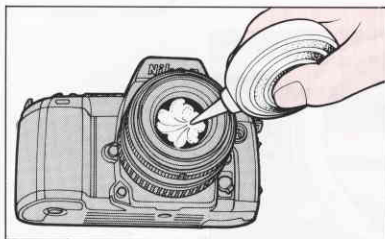


8. Clean glass surfaces such as the lens with a blower brush; avoid using lens tissue as much as possible. To remove dirt and smudges, use soft cotton moistened with pure

alcohol and wipe in a spiral motion from center to periphery. Be careful not to leave traces.

### Caution

A spray gun-type blower may damage the glass if used to clean the lens, especially when ED glass is used for the front lens element. To avoid damage, hold the blower upright with its nozzle more than 30cm (12 in.) from the lens surface and keep the nozzle moving so the stream of air is not concentrated in one spot.

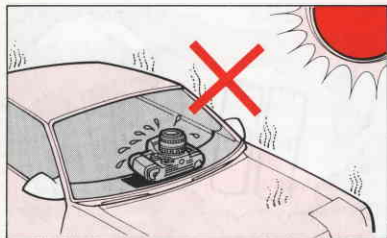


4. Do not leave the camera in an excessively hot place.



5. Keep the camera away from water or excessive moisture. When using the camera near water, guard against splashes, especially salt water spray.



6. If the camera malfunctions, take it immediately to an authorized Nikon dealer or service center.

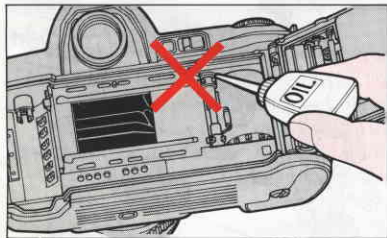


9. Do not lubricate the camera.




10. Store the camera in a cool, dry place away from naphthalene or camphor (moth repellents). In a humid environment, store the camera inside a vinyl bag with a desiccant to keep out dust, moisture and salt.




Note, however, that storing the leather case in a vinyl bag may cause the leather to deteriorate.

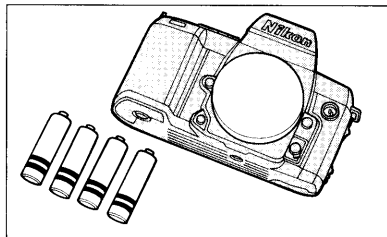


1. When not using the camera for a long period, remove batteries.

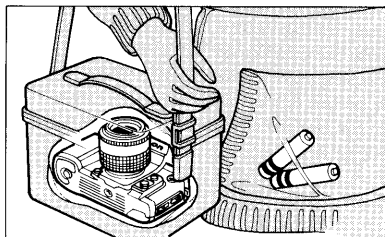


2. Battery power falls off in extremely cold temperatures — make sure batteries are new and keep the camera body wrapped in something warm.

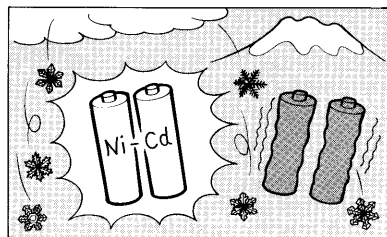


3. For better performance in cold temperatures, use Ni-Cd batteries.

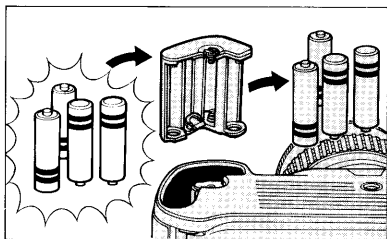

4. When replacing batteries, be sure to replace all batteries at the same time. Always use fresh batteries of the same brand.

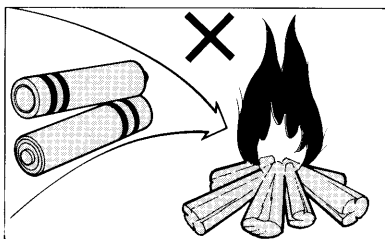

5. Do not throw used batteries into a fire.

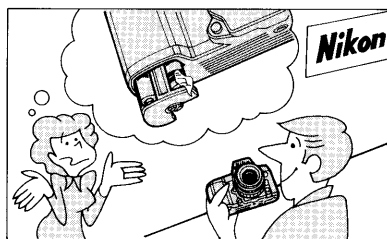

6. If the battery chamber is contaminated by battery leakage, take the camera to an authorized Nikon dealer.

# SPECIFICATIONS

<b>Type of camera</b>	Integral-motor autofocus 35mm single-lens reflex	<b>Metering range</b>	EV 0 to EV 21 at ISO 100 with f/1.4 lens
<b>Picture format</b>	24mm x 36mm (standard 35mm film format)	<b>Exposure modes</b>	Programmed auto (PD, P, PH), shutter-priority auto (S), aperture-priority auto (A) and manual (M) modes
<b>Lens mount</b>	Nikon F mount	<b>Programmed auto exposure control</b>	Both shutter speed and aperture are set automatically; flexible program in one EV step possible
<b>Lens</b>	AF Nikkor lenses, and Nikon lenses with Nikon F mount (with limitation) available	<b>Shutter-priority auto exposure control</b>	Aperture automatically selected to match manually set shutter speed
<b>Focus modes</b>	Autofocus, and manual focus with electronic range finder	<b>Aperture-priority auto exposure control</b>	Shutter speed automatically selected to match manually set aperture
<b>Autofocus</b>		<b>Manual exposure control</b>	Both aperture and shutter speed are set manually
<b>Autofocus detection system</b>	TTL phase detection system using Nikon advanced AM200 autofocus module	<b>Shutter</b>	Electromagnetically controlled vertical-travel focal-plane shutter
<b>Autofocus detection range</b>	Approx. EV minus 1 to EV 19 (at ISO 100)	<b>Shutter release</b>	Electromagnetic shutter by motor trigger
<b>Autofocus actuation method</b>	Single servo and continuous servo	<b>Shutter speeds</b>	Lithium niobate oscillator-controlled speeds from 1/8000 to 30 sec.; stepless in PD, P, PH or A mode; one EV steps in S or M mode; electromagnetically controlled long exposure at B setting
<b>Autofocus lock</b>	Possible by lightly pressing shutter release button in Single Servo AF mode or by using AF Lock button	<b>Viewfinder</b>	Fixed eyelevel pentaprism high-eyepoint type; 0.75X magnification with 50mm lens set at infinity; 92% frame coverage
<b>Electronic range finder</b>	Available in manual focus mode with an AF Nikkor and other AI-type Nikkor lenses with a maximum aperture of f/5.6 or faster	<b>Eyepoint</b>	Approx. 19mm
<b>Exposure metering</b>	Two types of exposure metering systems — Matrix Metering and Center-Weighted	<b>Eyepiece cover</b>	Model DK-8 prevents stray light from entering viewfinder
<b>Exposure meter switch</b>	Activated by lightly pressing shutter release button; stays on for approx. 8 sec. after lifting finger from button		

<b>Focusing screen</b>	Nikon advanced B-type BriteView screen with central focus brackets for autofocus operation	
<b>Viewfinder information</b>	The following LCD indications appear: focus indicators, exposure modes, shutter speeds/film speeds, aperture/exposure compensation value, electronic analog display, exposure compensation mark; ready-light LED; viewfinder display is illuminated automatically or by pressing the viewfinder illumination button	picture blur in PD, P, PH or A mode; (2) when lens is not set to the smallest aperture setting in PD, P, PH or S mode; (3) when non-DX-coded film, damaged film or film with an unacceptable DX-code is loaded; (4) such as torn or damaged film during film advance
<b>LCD information</b>	The following indications appear: exposure modes, metering types, exposure compensation, electronic analog display, shutter speeds/film speeds, aperture/exposure compensation value, film speed setting, DX-coded film speed setting, film advance mode, film installation, film advance and rewind, self-timer, multiple exposure, frame counter/self-timer duration/number of multiple exposure	<b>Auto exposure lock</b> Available via sliding the AE Lock lever while the meter is on <b>Film speed range</b> ISO 25 to 5000 for DX-coded film; ISO 6 to 6400 for manual setting <b>Film speed setting</b> At DX position, automatically set to ISO speed of DX-coded film used; with non-DX-coded film, ISO speed is set manually <b>Film loading</b> Film automatically advances to first frame when shutter release button is depressed once <b>Film advance</b> In S (Single-frame) shooting mode, film automatically advances one frame when shutter is released; in CH (Continuous High) or CL (Continuous Low) shooting mode, shots are taken as long as shutter release button is depressed; in CH mode, shooting speed is approx. 3.3fps, and in CL, approx. 2.0fps (in Continuous Servo Autofocus or manual focus mode, with new batteries at normal temperatures, and a shutter
<b>Electronic beeper</b>	With power switch at <b>II</b> ), beeper sounds in the following cases: <b>operation signals;</b> (1) at end of film roll; (2) when film rewinding is complete; (3) during self-timer operation; <b>alert signals;</b> (1) for over- or underexposure and possible	

<b>Frame counter</b>	speed faster than 1/125 sec.) Accumulative type; counts back while film is rewinding
<b>Film rewind</b>	Automatically rewinds by pressing film rewind button and multiple exposure/film rewind button; approx. 10 sec. per 24-exposure roll; stops automatically when film is rewound
<b>Self-timer</b>	Electronically controlled; timer duration can be selected between 2 to 30 sec. in one sec. increments; blinking LED indicates self-timer operation; two-shot self-timer is possible; cancellable
<b>Exposure compensation</b>	Possible using exposure compensation button within $\pm 5$ EV range in 1/3 EV steps
<b>Multiple exposure</b>	Up to 9 exposures can be set
<b>Depth-of-field preview button</b>	Provides visual verification of depth of field; can be previewed in A or M mode
<b>Reflex mirror</b>	Automatic, instant-return type
<b>Camera back</b>	Hinged back; exchangeable with Nikon Multi-Control Back MF-21 or Data Back MF-20
<b>Accessory shoe</b>	Standard ISO-type hot-shoe contact; ready-light contact, TTL flash contact, monitor contact
<b>Flash synchronization</b>	1/60 to 1/125 sec. in PD, P, PH or A mode; in S or M mode, shutter fires at speed set, and when set from

<b>Flash ready-light</b>	1/250 to 1/8000 sec., shutter is automatically set to 1/250 sec.; down to 30 sec. shutter is available by using SB-24 in rear-curtain sync Viewfinder LED lights up when Nikon dedicated speedlight is ready to fire; blinks to warn of poor camera/speedlight connection or insufficient light for correct exposure
<b>Autofocus</b>	Possible with Nikon Autofocus Speedlights SB-24, SB-23, SB-22 or SB-20
<b>Power source</b>	Four AA-type batteries

**Number of 36-(24-)exposure film rolls per set of fresh batteries (approx.)\***

For Continuous Servo Autofocus with AF Nikkor lens covering the full range from infinity ( $\infty$ ) to the closest distance and back to infinity ( $\infty$ ) before each shot

<b>Batteries</b>	At 68°F	At 14°F
<b>Alkaline-manganese (LR06)</b>	120 (180)	20 (30)
<b>Manganese</b>	40 (60)	5 (7)
<b>NiCd (KR-AA)</b>	80 (120)	25 (35)

\* Using AF Nikkor 50mm f/1.8 or AF Nikkor 35–70mm f/3.3–4.5, with film advance mode at CH and a shutter speed of 1/125 sec. or faster.



**Checking  
battery power**

Battery power is sufficient if shutter speed and aperture indications appear in the LCD panel and viewfinder by lightly pressing shutter release button, and remain on for approx. 8 sec. after finger is removed from the button; insufficient if these indications turn off immediately after finger is removed from the button; if LCD blinks and shutter locks, batteries are exhausted; if no data appears and shutter does not operate, batteries are exhausted or improperly loaded

**Dimensions (W x H x D)** 6.0 x 4.0 x 2.6 in.  
(153.6 x 102.5 x 67.5mm)

**Weight (body only)** Approx. 24.5 oz. (695g)

With fresh alkaline batteries at normal temperature (68°F).  
Specifications and designs are subject to change without notice.

For multiple flash photography using Nikon Speedlights, if the electric current in the synchro circuit exceeds a certain level, you may not be able to take a second shot after taking the first shot. Take care that the combined total of the coefficients (numbers shown in parenthesis below) for all of the speedlight's used at any one time does not exceed 20 at 68°F (13 at 104°F).

SB-24 (1) SB-23 (4) SB-22 (6) SB-21 (4) SB-20 (9)  
SB-19 (2) SB-18 (16) SB-17 (4) SB-16 (4) SB-15 (4)  
SB-14 (1) SB-12 (1) SB-11 (1)

If you are unable to take a second shot, disconnect master speedlight from the N8008, or turn each of the speedlights off and on once.

In certain cases, due to static electricity or poorly loaded batteries, the N8008's microcomputer may turn the camera off, even with fresh, properly installed batteries. For the same reason, film may not advance properly, or the film loading indication may start blinking before you come to the end of the film. In each of these cases, to resume operation, simply slide the power switch to OFF and turn on again, or remove batteries and install again.

Your Nikon camera requires precise electronic and mechanical matching between component products such as lenses and electronic flash. Nikon brand lenses and electronic flash units are made to Nikon's factory specifications and will operate properly and in accordance with the Nikon Limited Warranty provided. Damage to your Nikon product, as a result of malfunction or improper connections, caused by the use of non-Nikon brand products, **is not covered under the terms of the Nikon Limited Warranty and will void the Nikon warranty.**

Nikon cannot be held responsible for malfunction resulting from the use of the camera other than as specified in this manual.