

SECTION 5


PARTS LIST

SAFETY PRECAUTION

Parts identified by the  symbol are critical for safety. Replace only with specified part numbers.

5.1 PACKING AND ACCESSORY ASSEMBLY <M1>

The instruction manual to be provided with this product will differ according to the destination.

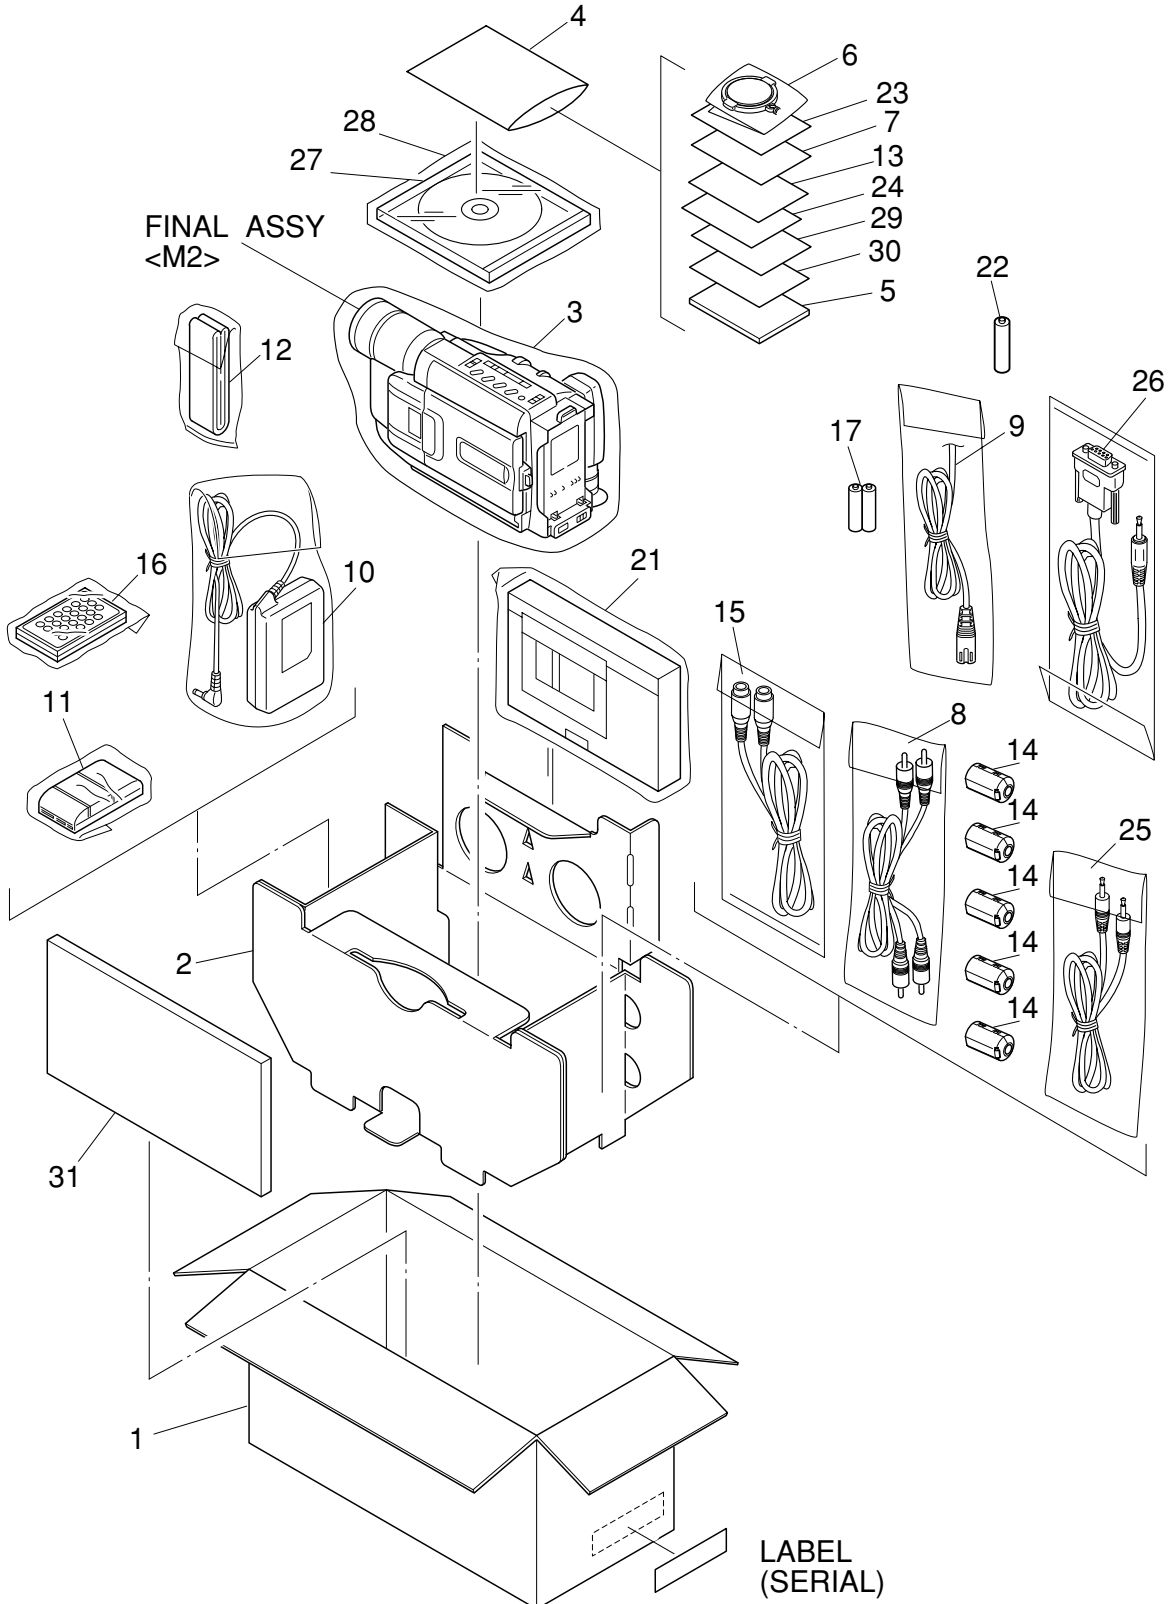


#	△ REF No.	PART No.	PART NAME, DESCRIPTION


PACKING AND ACCESSORY ASSEMBLY <M1>

1	LY32179-004A	PACKING CASE,27EA
	LY32179-005A	PACKING CASE,77EA
2	LY32065-001A	CUSHION
3	LY30023-002A	POLY BAG
4	QPA02003506	POLY BAG
△ 5	LYT0675-001B	IB(EN),77EA
△	LYT0683-001A	IB(EN),27EA
6	LY41538-002B	LENS CAP
7	BT-56001-2	WARRANTY CARD
8	PEAC0362-150	CABLE ASSY(AUDIO/VIDEO)
△ 9	QMPH020-190-JR	POWER CORD
△ 10	LY20688-007A	AC ADAPTER,AP-V10EA
△ 11	YQ10629E	BATTERY PACK,BN-V11U
12	LY20186-001A	SHOULDER STRAP
13	BT-56002-2	SER.NET CARD
14	QQR0491-002	CORE FILTER,X4 27EA
	QQR0491-002	CORE FILTER,X5 77EA
15	QAM0004-003	S CABLE,S-VIDEO CABLE
16	LY20543-002A	REMOTE CONTROL UNIT,RM-V716U,77EA
17	—	AAA(R03)BATTERY,FOR RCU,X2 77EA
21	YQ31963A-3	CASSETTE ADAPTER
	or YQ31963B-3	CASSETTE ADAPTER
22	—	AA(R6)BATTERY,FOR CASS.ADAPTER
△ 23	LYT0309-001B	IB(SOFT)(EN),77EA
24	YU30843-4	SOFT WARE PERM.,77EA
25	PEAC0428-150	CABLE ASSY(EDITING),77EA
26	QAM0084-001	PC CONNECTION CABLE,77EA
27	LY32210-007A	CD ROM,77EA
28	LY30023-010A	POLY BAG,77EA
29	LYT0309-004A	SHEET(INSTALL),77EA
30	LYT0378-003A	SHEET(AGREEMENT),77EA
31	LY43032-001A	SPACER(PACKING),77EA

- **INSTRUCTIONS**
- EN ENGLISH

5.2 FINAL ASSEMBLY <M2>

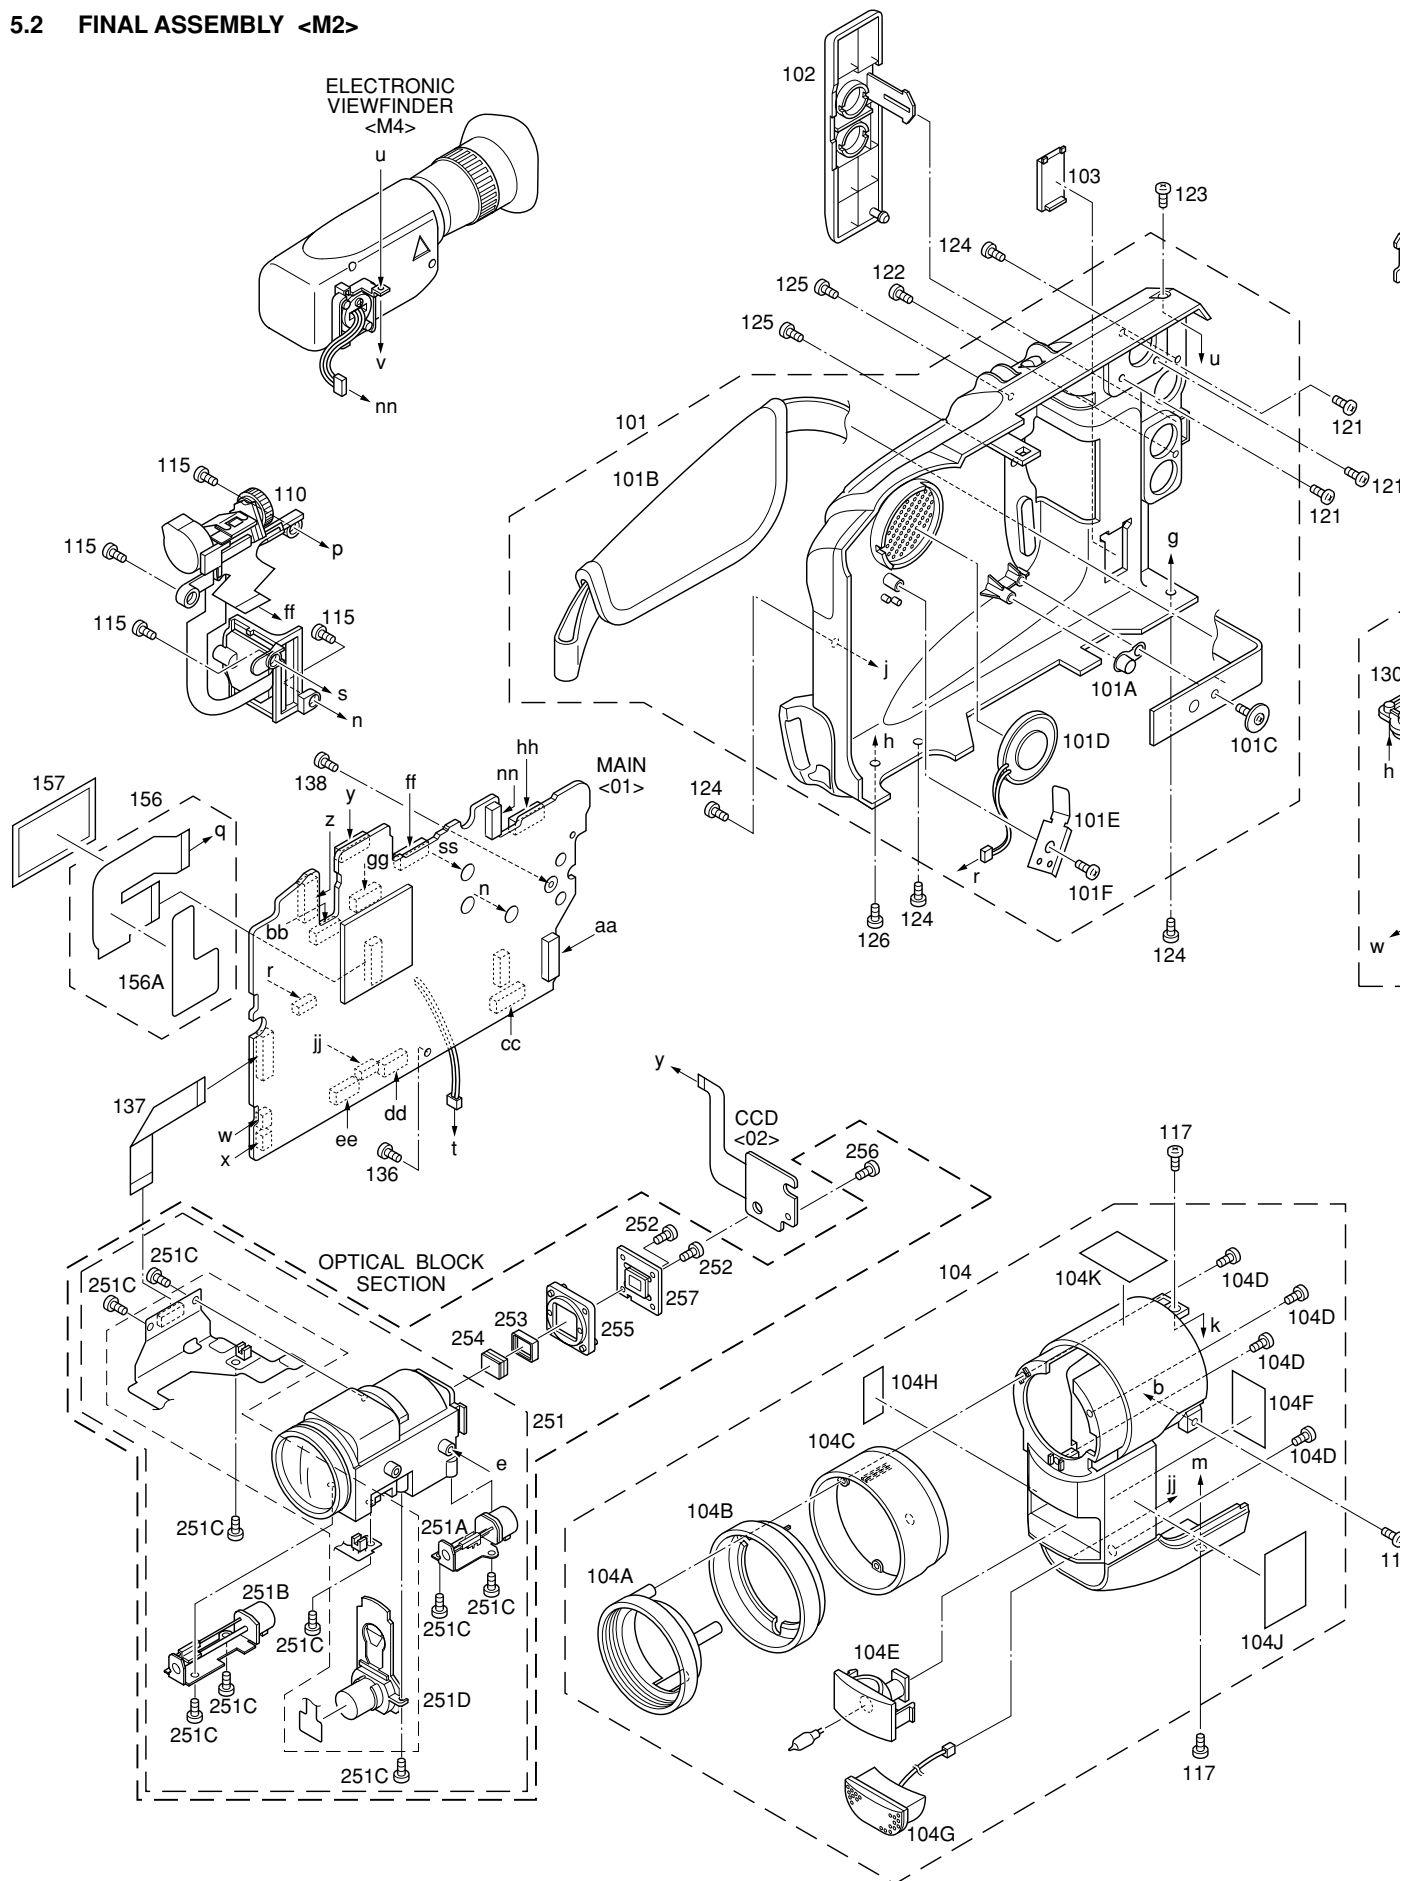

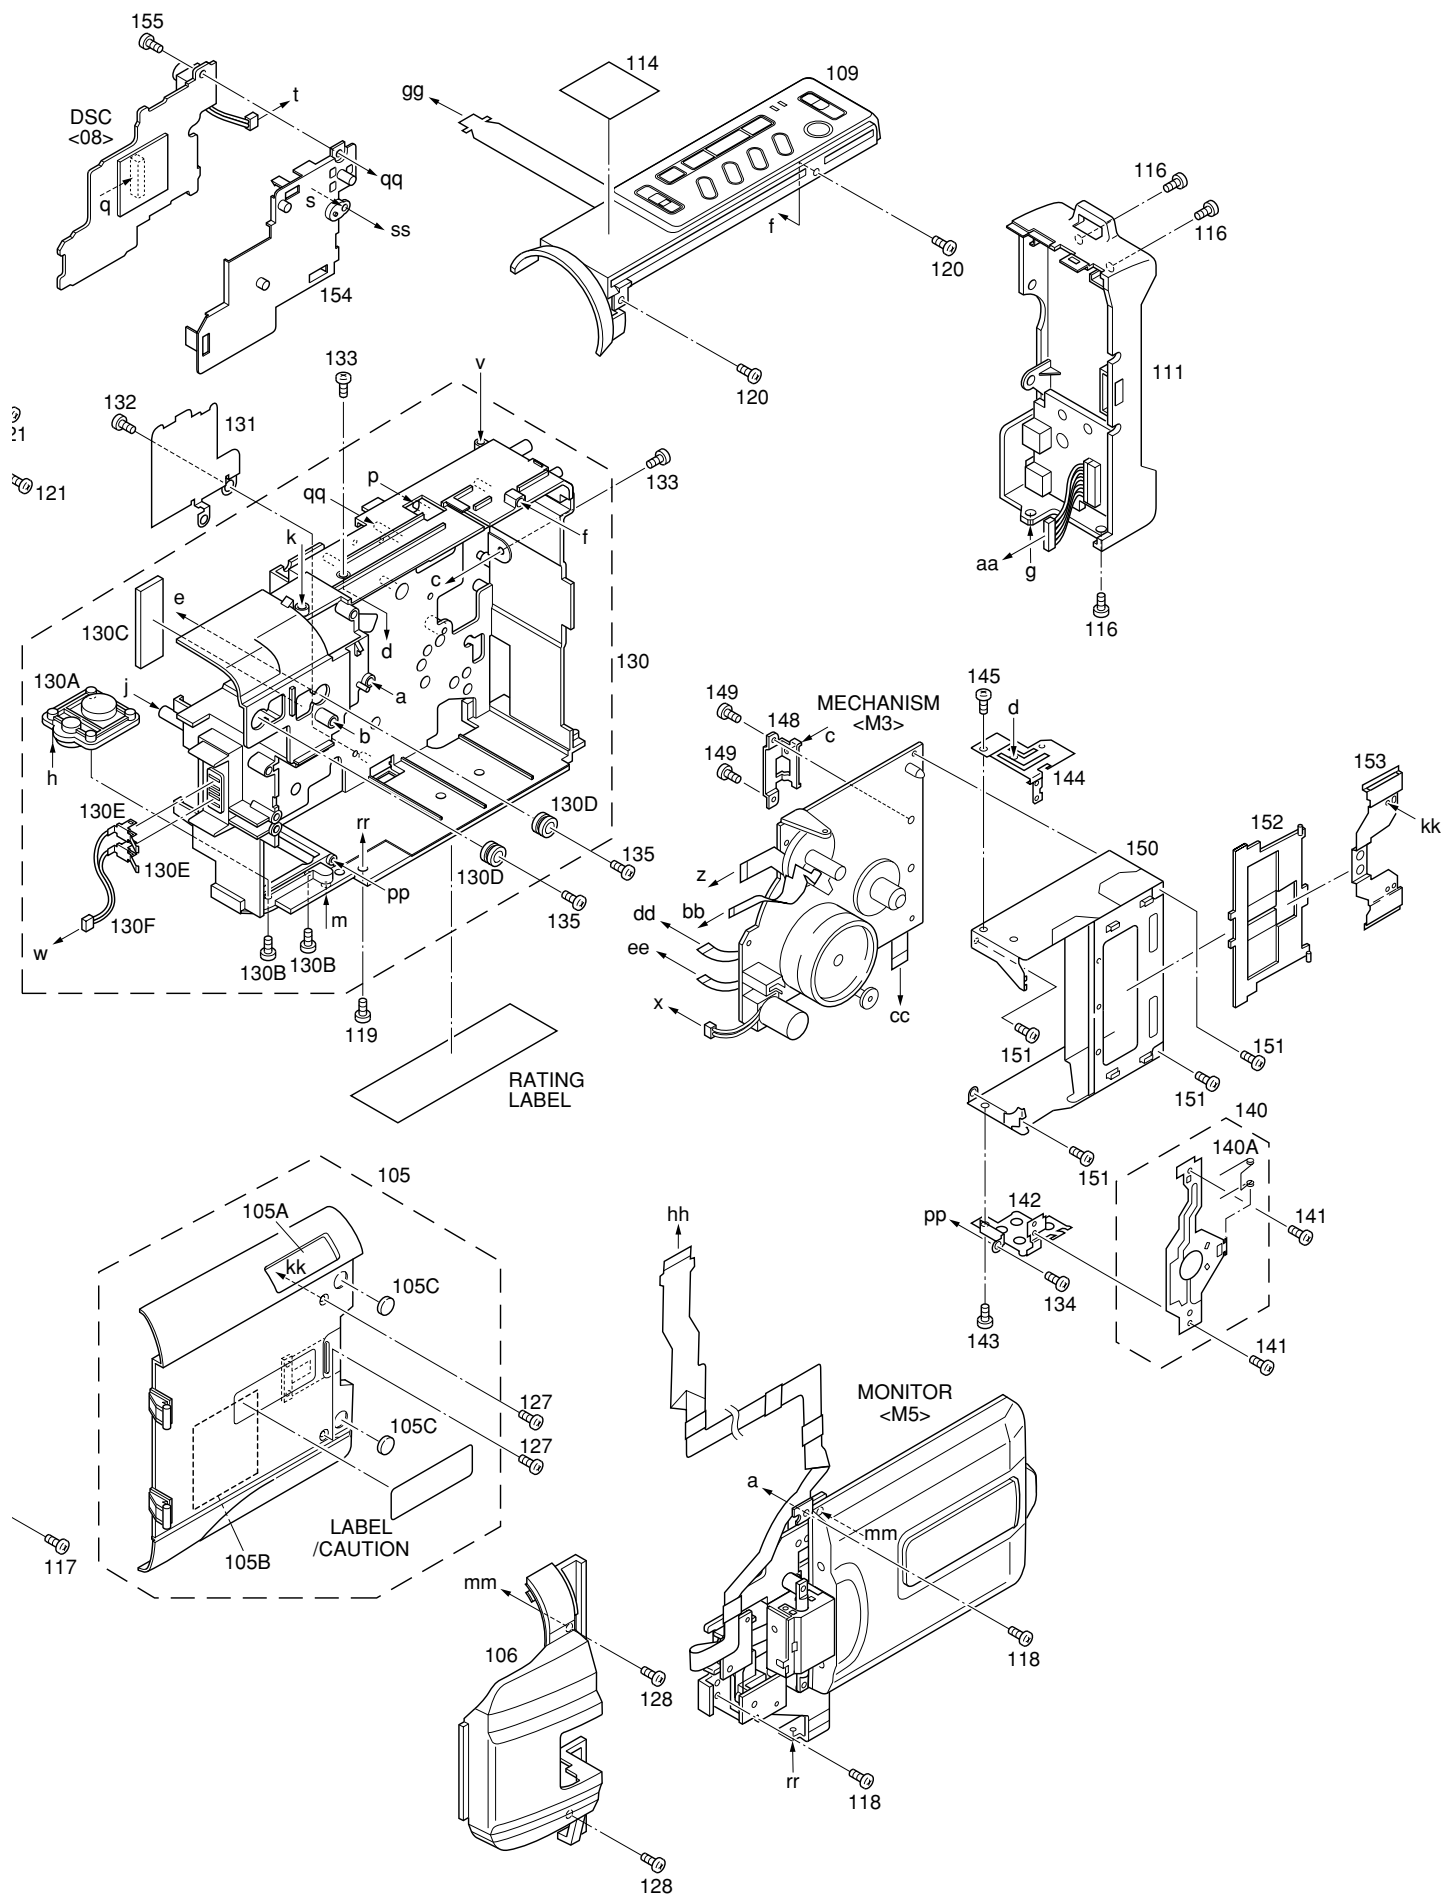

# △ REF No.	PART No.	PART NAME, DESCRIPTION

FINAL ASSEMBLY <M2>		
101	LY20684-008A	LOWER CASE ASSY,27EA
	LY20684-009A	LOWER CASE ASSY,77EA
101A	LY40081-001A	CAP
101B	LY20682-001A	GRIP BELT
101C	LY30018-003A	SPECIAL SCREW
101D	QAS0061-001	SPEAKER
101E	LY42764-001B	HOLDER(SPEAKER)
101F	QYSLSF2050Z	SCREW
102	LY31945-001C	COVER(JACK)
103	LY31946-001A	COVER(JIG)
104	LY20683-014A	FRONT COVER ASSY
104A	LY31937-001A	HOOD
104B	LY31938-001A	COVER(HOOD)
104C	LY31936-001A	RING
104D	QYSLSF2060D	SCREW,X4
104E	LY32040-001A	DC LIGHT
104F	LY30029-0B4A	SPACER(A)
104G	LY32043-001A	MICROPHONE
104H	YQ44341-6	CAUTION LABEL
104J	LY32058-002A	STICKER(A)
104K	LY32060-002A	STICKER(C)
105	LY20694-002A	CASS.COVER(M)ASSY
105A	LY42883-001A	MARK
105B	LY40559-001A	SHIELD SHEET
105C	LY40076-001A	SPACER,X2
106	LY10257-010A	UPPER CASE(M),27EA
	LY10257-011A	UPPER CASE(M),77EA
109	LY20614-002B	TOP OPE UNIT,27EA
	LY20614-005B	TOP OPE UNIT,77EA
110	LY20613-001A	ZOOM UNIT
111	LY20615-001A	REAR UNIT,77EA
	LY20615-004A	REAR UNIT,27EA
114	LY32061-001A	STICKER(D),27EA
	LY32061-004A	STICKER(D),77EA
115	QYSLSF2060D	SCREW,X4
116	QYSLSF2060D	SCREW,X3
117	QYSLSF2060D	SCREW,X3
118	QYSLSF2060D	SCREW,X2
119	QYSLSP2030D	SCREW
120	QYSLSF2060D	SCREW,X2
121	QYSLSF2050Z	SCREW,X3
122	QYSLSF2060D	SCREW
123	QYSLSF2060D	SCREW
124	QYSLSF2060D	SCREW,X4
125	QYSLSF2060D	SCREW,X2
126	QYSLSF2060D	SCREW
127	QYSLSP2030D	SCREW,X2
128	QYSLSP2030D	SCREW,X2
130	LY20678-001A	FRAME ASSY
130A	YQ31843	BASE
130B	QYSLSF2060D	SCREW,X2
130C	LY30029-0A4A	SPACER(A)
130D	LY41082-001A	CUSHION(OP),X2
130E	YQ43810-1-1	CONTACT(LIGHT),X2
130F	WJM0167-001A	E-SI C WIRE C-F
131	LY42758-001A	S.CASE(MAIN)
132	QYSPSTU1725M	SCREW
133	LY41173-001A	SPECIAL SCREW,X2

# △ REF No.	PART No.	PART NAME, DESCRIPTION
134	QYSLSF1750D	SCREW
135	LY30018-050A	SPECIAL SCREW,X2
136	LY42981-001A	SPECIAL SCREW
137	WJT0039-001A	E-CARD WIRE,OP-MAIN CN15
138	QYSLSF2060D	SCREW
140	LY31790-001A	FRONT FRAME ASSY
140A	YQ44144-1-1	TAPE GUIDE
141	SPSH1725M	SCREW,X2
142	LY31807-001A	SIDE BRACKET L
143	LY42722-003A	SCREW
144	LY31806-001A	SIDE BRACKET R
145	LY42722-003A	SCREW
148	LY31816-001A	BRACKET(MECHA)
149	LY42722-003A	SCREW,X2
150	LY31808-001A	CASS.HOUSING ASSY
151	LY42722-003A	SCREW,X4
152	LY30176-001A	CASS.COV.INSIDE
153	LY31956-001A	BRACKET(C.COV.)
154	LY20645-001A	HOLDER(DSC P.),77EA
155	QYSLSF2060D	SCREW,77EA
156	LY42875-001A	FPC(DSC)ASSY,77EA
156A	LY42876-001A	S.SHEET(DSC FPC),77EA
157	YU40341	INSULATOR,77EA
- OPTICAL BLOCK SECTION -		
251	LY30948-003A	OP BLOCK ASSY
251A	PTY30948-002	FOCUS MOTOR
251B	PTY30948-321	ZOOM MOTOR
251C	PTY30151-016	SCREW,X9
251D	PTY30948-006	IRIS MOTOR UNIT,INCL.FPC
252	QYSPSGU2080Z	SCREW,X2
253	LY31441-001A	SPACER RUBBER
254	LY41370-001A	OPTICAL LPF
255	LY20086-001A	CCD SPACER
256	LY30018-072A	SPECIAL SCREW
257	LYH40018-004A	CCD BASE ASSY

5.3 ELECTRICAL PARTS LIST

▲ REF No. PART No. PART NAME, DESCRIPTION

MAIN BOARD ASSEMBLY <01>

PW	YB10310EY-02	MAIN BOARD ASSY,27EA
	YB10310EZ-02	MAIN BOARD ASSY,77EA
IC101	UPD703039-027	IC(MICRO C ROM)
	or UPD70F3040-027	IC(MICRO C ROM)
IC102	TC7S86FU	IC(DIGITAL)
	or SN74AHC1G86K	IC
	or MC74VHC1G86DF	IC
IC104	AT25080N-10SC-X	IC
	or X25170S8I-2.5-X	IC
	or 25LC080-I/SN-X	IC
IC105	M62367GP	IC
IC106	IC-PST9327U-X	IC
IC107	RS5C314	IC
▲ IC1601	BD6630KV	IC
IC1801	PIC-26043S	IR DETECT UNIT,77EA
IC2001	MC74AC04DT	IC
IC2401	NJM2149V-X	IC
IC3001	JCY0130	IC
IC3002	SN74AHC1G04K-X	IC
IC3501	HA118224F	IC
IC4001	JCY0149	IC
IC4002	TMS4C2973-28-X	IC
IC4003	UPD6467GR-506-X	IC(MICRO C ROM)
IC4201	UPC358G2/5/-W	IC
IC4202	BA10324AF-XE	IC
IC4251	BA10358F-XE	IC
IC4501	UPD16835G3	IC
IC5201	HD49326BF	IC
IC5202	JCY0098	IC
IC6001	FA3698F	IC
IC7002	MN5814	IC
IC7006	BA4558F	IC
IC7007	TC7S04FU	IC(DIGITAL),27EA
	or SN74AHC1G04K	IC,27EA
	or MC74VHC1G04DF	IC,27EA
IC7008	SN74LV4052APW	IC
Q101	2SA1774/RS/-X	TRANSISTOR
Q102	DTC144EE	TRANSISTOR
Q103	2SC4617/QR/-X	TRANSISTOR
Q104	DTC144EE	TRANSISTOR
Q105	2SA1774/RS/-X	TRANSISTOR
Q110	DTC144EE	TRANSISTOR
Q111	DTC114EE	TRANSISTOR
Q112	DTC114EE	TRANSISTOR
Q113	2SC4097/QR/-X	TRANSISTOR
Q2001	DTA114TE	TRANSISTOR
Q2007	PUMX1	PAIR TRANSISTOR
	or HN1C01FU/G/-X	PAIR TRANSISTOR
	or UMX1N	PAIR TRANSISTOR
Q2008	PUMT1	PAIR TRANSISTOR
	or HN1A01FU/G/-X	PAIR TRANSISTOR
Q2021	DTC144EE	TRANSISTOR
Q2022	DTC144EE	TRANSISTOR
Q2023	2SC4617/QR/-X	TRANSISTOR
Q2071	2SC4617/QR/-X	TRANSISTOR
Q2401	DTC144EE	TRANSISTOR
Q3002	PUMX1	PAIR TRANSISTOR

▲ REF No. PART No. PART NAME, DESCRIPTION

	or UMX1N	PAIR TRANSISTOR
	or HN1C01FU/G/-X	PAIR TRANSISTOR
Q3003	2SC4097/QR/-X	TRANSISTOR
Q3006	DTC144EE	TRANSISTOR
Q3501	HN1C01FU/G/-X	PAIR TRANSISTOR
Q3502	HN1C01FU/G/-X	PAIR TRANSISTOR
Q3505	DTC144EE	TRANSISTOR,B,C
Q3901	HN1A01FU/G/-X	PAIR TRANSISTOR
Q4201	2SC4617/QR/-X	TRANSISTOR
Q4251	RPM-22PB	PHOTO TRANSISTOR
Q4501	DTC114EE	TRANSISTOR
Q4701	PUMX1	PAIR TRANSISTOR
	or HN1C01FU/G/-X	PAIR TRANSISTOR
Q4702	2SC4617/QR/-X	TRANSISTOR
Q4703	PUMX1	PAIR TRANSISTOR
	or HN1C01FU/G/-X	PAIR TRANSISTOR
Q4704	PUMT1	PAIR TRANSISTOR
	or HN1A01FU/G/-X	PAIR TRANSISTOR
Q4705	2SC4617/QR/-X	TRANSISTOR
Q4706	2SC4617/QR/-X	TRANSISTOR
Q4707	2SC4617/QR/-X	TRANSISTOR
Q4711	PUMX1	PAIR TRANSISTOR
	or HN1C01FU/G/-X	PAIR TRANSISTOR
Q4712	PUMT1	PAIR TRANSISTOR
	or HN1A01FU/G/-X	PAIR TRANSISTOR
Q4713	PUMX1	PAIR TRANSISTOR
	or HN1C01FU/G/-X	PAIR TRANSISTOR
Q4714	PUMT1	PAIR TRANSISTOR
	or HN1A01FU/G/-X	PAIR TRANSISTOR
Q4715	PUMX1	PAIR TRANSISTOR
	or HN1C01FU/G/-X	PAIR TRANSISTOR
Q6101	SSM6J07FU	MOS FET
Q6106	HN1C01FU/G/-X	PAIR TRANSISTOR
Q6107	SSM3J05FU	MOS FET
Q6201	SSM6J07FU	MOS FET
Q6301	CPH3304	MOS FET
Q6306	SSM3K02F	MOS FET
Q6307	2SC4617/QR/-X	TRANSISTOR
Q6308	CPH3101	TRANSISTOR
Q6401	SSM6J07FU	MOS FET
Q6501	SSM6J07FU	MOS FET
Q6601	CPH3305	MOS FET
Q6608	DTC144EE	TRANSISTOR
Q6621	HN1C01FU/G/-X	PAIR TRANSISTOR
Q6622	2SA1577/QR/-X	TRANSISTOR
Q6701	FX802	TRANSISTOR
Q6702	2SC4097/QR/-X	TRANSISTOR
Q6801	2SA1577/QR/-X	TRANSISTOR
Q6811	2SB1121/TU/-X	TRANSISTOR
Q7003	PUMX1	PAIR TRANSISTOR
Q7011	PUMX1	PAIR TRANSISTOR
Q7013	PUMX1	PAIR TRANSISTOR
Q7015	PUMX1	PAIR TRANSISTOR
Q7017	2SC4617/QR/-X	TRANSISTOR
Q7018	2SA1774/QR/-X	TRANSISTOR
Q7019	2SC4617/QR/-X	TRANSISTOR
Q7020	2SA1774/QR/-X	TRANSISTOR
Q7022	DTC144EE	TRANSISTOR,27EA
▲ D101	SB007W03Q	SB DIODE
D102	UDZS7.5B	ZENER DIODE
D105	1SS355	DIODE

# ▲ REF No.	PART No.	PART NAME, DESCRIPTION		# ▲ REF No.	PART No.	PART NAME, DESCRIPTION	
D106	1SS355	DIODE		R149	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W
D107	SB007W03Q	SB DIODE		R150	NRSA63J-222X	MG RESISTOR	2.2kΩ, 1/16W
D501	MA8068	ZENER DIODE		R151	NRSA63J-222X	MG RESISTOR	2.2kΩ, 1/16W
D502	MA8068	ZENER DIODE		R152	NRSA63J-474X	MG RESISTOR	470kΩ, 1/16W
D3001	DAN222	DIODE		R153	NRSA63J-474X	MG RESISTOR	470kΩ, 1/16W
D5201	1SS355	DIODE		R158	NRSA63J-474X	MG RESISTOR	470kΩ, 1/16W
D6001	CRS03	SB DIODE		R159	NRSA63J-474X	MG RESISTOR	470kΩ, 1/16W
D6101	CRS03	SB DIODE		R160	NRSA63J-474X	MG RESISTOR	470kΩ, 1/16W
D6106	1SS357	SB DIODE		R161	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W
D6201	CRS03	SB DIODE		R162	NRSA63J-472X	MG RESISTOR	4.7kΩ, 1/16W
D6301	CRS03	SB DIODE		R163	NRSA63J-221X	MG RESISTOR	220Ω, 1/16W
D6401	CRS03	SB DIODE		R164	NRSA63J-472X	MG RESISTOR	4.7kΩ, 1/16W
D6501	CRS03	SB DIODE		R166	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W
D6601	1SS383	SB DIODE		R167	NRSA63J-183X	MG RESISTOR	18kΩ, 1/16W
D6616	UDZS6.8B	ZENER DIODE		R168	NRSA63J-562X	MG RESISTOR	5.6kΩ, 1/16W
D7002	MA365	VARI CAP DIODE		R170	NRSA63J-333X	MG RESISTOR	33kΩ, 1/16W
D7004	RB471E	SB DIODE		R171	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W
R101	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W	R172	NRSA63J-151X	MG RESISTOR	150Ω, 1/16W
▲ R104	NRSA63J-102X	MG RESISTOR	1kΩ, 1/16W	R173	NRSA63J-0R0X	MG RESISTOR	0Ω, 1/16W
R105	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W	R174	NRSA63J-0R0X	MG RESISTOR	0Ω, 1/16W
R106	NRSA63J-561X	MG RESISTOR	560Ω, 1/16W	R175	NRSA63J-105X	MG RESISTOR	1MΩ, 1/16W
R107	NRVA63D-153X	CMF RESISTOR	15kΩ, 1/16W	R176	NRSA63J-221X	MG RESISTOR	220Ω, 1/16W
R108	NRVA63D-243X	CMF RESISTOR	24kΩ, 1/16W	R180	NRSA63J-331X	MG RESISTOR	330Ω, 1/16W
R109	NRVA63D-183X	CMF RESISTOR	18kΩ, 1/16W	R182	NRSA63J-222X	MG RESISTOR	2.2kΩ, 1/16W
R110	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W	R183	NRSA63J-222X	MG RESISTOR	2.2kΩ, 1/16W
R111	NRSA63J-273X	MG RESISTOR	27kΩ, 1/16W	R184	NRSA63J-222X	MG RESISTOR	2.2kΩ, 1/16W
R112	NRSA63J-331X	MG RESISTOR	330Ω, 1/16W	R188	NRSA63J-222X	MG RESISTOR	2.2kΩ, 1/16W
R113	NRSA63J-562X	MG RESISTOR	5.6kΩ, 1/16W	R190	NRSA63J-331X	MG RESISTOR	330Ω, 1/16W
R114	NRSA63J-821X	MG RESISTOR	820Ω, 1/16W	R191	NRSA63J-0R0X	MG RESISTOR	0Ω, 1/16W
R115	NRSA63J-101X	MG RESISTOR	100Ω, 1/16W	R192	NRSA63J-105X	MG RESISTOR	1MΩ, 1/16W
R116	NRSA63J-102X	MG RESISTOR	1kΩ, 1/16W	R195	NRSA63J-0R0X	MG RESISTOR	0Ω, 1/16W
R118	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W	R504	NRSA63J-221X	MG RESISTOR	220Ω, 1/16W
R119	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W	R505	NRSA63J-331X	MG RESISTOR	330Ω, 1/16W
R120	NRSA63J-273X	MG RESISTOR	27kΩ, 1/16W	R1601	NRV142F-R33X	CMF RESISTOR	0.33Ω, 1/4W
R121	NRSA63J-273X	MG RESISTOR	27kΩ, 1/16W	R1602	NRV142F-R33X	CMF RESISTOR	0.33Ω, 1/4W
R122	NRSA63J-393X	MG RESISTOR	39kΩ, 1/16W	R1603	NRSA63J-154X	MG RESISTOR	150kΩ, 1/16W
R123	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W	R1604	NRSA63J-102X	MG RESISTOR	1kΩ, 1/16W
R124	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W	R1605	NRSA63J-102X	MG RESISTOR	1kΩ, 1/16W
R125	NRSA63J-273X	MG RESISTOR	27kΩ, 1/16W	R1606	NRSA63J-102X	MG RESISTOR	1kΩ, 1/16W
R126	NRSA63J-153X	MG RESISTOR	15kΩ, 1/16W	R1607	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W
R127	NRSA63J-221X	MG RESISTOR	220Ω, 1/16W	R1608	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W
R128	NRSA63J-102X	MG RESISTOR	1kΩ, 1/16W	R1609	NRSA63J-333X	MG RESISTOR	33kΩ, 1/16W
R129	NRSA63J-102X	MG RESISTOR	1kΩ, 1/16W	R1610	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W
R130	NRSA63J-105X	MG RESISTOR	1MΩ, 1/16W	R1612	NRSA63J-392X	MG RESISTOR	3.9kΩ, 1/16W
R131	NRSA63J-105X	MG RESISTOR	1MΩ, 1/16W	R1613	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W
R132	NRSA63J-105X	MG RESISTOR	1MΩ, 1/16W	R1614	NRSA63J-333X	MG RESISTOR	33kΩ, 1/16W
R133	NRSA63J-105X	MG RESISTOR	1MΩ, 1/16W	R1615	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W
R134	NRSA63J-105X	MG RESISTOR	1MΩ, 1/16W	R1617	NRSA63J-183X	MG RESISTOR	18kΩ, 1/16W
R135	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W	R1618	NRSA63J-154X	MG RESISTOR	150kΩ, 1/16W
R136	NRSA63J-474X	MG RESISTOR	470kΩ, 1/16W	R1619	NRSA63J-471X	MG RESISTOR	470Ω, 1/16W
R138	NRSA63J-333X	MG RESISTOR	33kΩ, 1/16W	R1620	NRSA63J-684X	MG RESISTOR	680kΩ, 1/16W
R139	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W	R1621	NRSA63J-102X	MG RESISTOR	1kΩ, 1/16W
R140	NRSA63J-753X	MG RESISTOR	75kΩ, 1/16W	R1622	NRSA63J-224X	MG RESISTOR	220kΩ, 1/16W
R141	NRSA63J-334X	MG RESISTOR	330kΩ, 1/16W	R1623	NRSA63J-223X	MG RESISTOR	22kΩ, 1/16W
R142	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W	R1624	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W
R143	NRSA63J-105X	MG RESISTOR	1MΩ, 1/16W	R1625	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W
R144	NRSA63J-221X	MG RESISTOR	220Ω, 1/16W	R1626	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W
R145	NRSA63J-222X	MG RESISTOR	2.2kΩ, 1/16W	R1628	NRSA63J-0R0X	MG RESISTOR	0Ω, 1/16W
R146	NRSA63J-474X	MG RESISTOR	470kΩ, 1/16W	R1629	NRSA63J-0R0X	MG RESISTOR	0Ω, 1/16W
R147	NRSA63J-472X	MG RESISTOR	4.7kΩ, 1/16W	R1630	NRSA63J-0R0X	MG RESISTOR	0Ω, 1/16W
R148	NRSA63J-0R0X	MG RESISTOR	0Ω, 1/16W	R1631	NRSA63J-122X	MG RESISTOR	1.2kΩ, 1/16W

# ▲ REF No.	PART No.	PART NAME, DESCRIPTION		# ▲ REF No.	PART No.	PART NAME, DESCRIPTION	
R1632	NRSA63J-153X	MG RESISTOR	15kΩ, 1/16W	R4007	NRVA63D-392X	CMF RESISTOR	3.9kΩ, 1/16W
R1633	NRSA63J-683X	MG RESISTOR	68kΩ, 1/16W	R4008	NRVA63D-272X	CMF RESISTOR	2.7kΩ, 1/16W
R2001	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W	R4009	NRVA63D-152X	CMF RESISTOR	1.5kΩ, 1/16W
R2002	NRSA63J-332X	MG RESISTOR	3.3kΩ, 1/16W	R4010	NRVA63D-122X	CMF RESISTOR	1.2kΩ, 1/16W
R2003	NRSA63J-102X	MG RESISTOR	1kΩ, 1/16W	R4011	NRVA63D-152X	CMF RESISTOR	1.5kΩ, 1/16W
R2004	NRSA63J-681X	MG RESISTOR	680Ω, 1/16W	R4012	NRVA63D-122X	CMF RESISTOR	1.2kΩ, 1/16W
R2005	NRSA63J-272X	MG RESISTOR	2.7kΩ, 1/16W	R4013	NRVA63D-152X	CMF RESISTOR	1.5kΩ, 1/16W
R2006	NRSA63J-102X	MG RESISTOR	1kΩ, 1/16W	R4014	NRVA63D-122X	CMF RESISTOR	1.2kΩ, 1/16W
R2011	NRSA63J-101X	MG RESISTOR	100Ω, 1/16W	R4036	NRSA63J-0R0X	MG RESISTOR	0Ω, 1/16W
R2012	NRSA63J-101X	MG RESISTOR	100Ω, 1/16W	R4037	NRSA63J-102X	MG RESISTOR	1kΩ, 1/16W
R2021	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W	R4038	NRSA63J-101X	MG RESISTOR, 77EA	100Ω, 1/16W
R2022	NRSA63J-334X	MG RESISTOR	330kΩ, 1/16W	R4201	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W
R2023	NRSA63J-820X	MG RESISTOR	82Ω, 1/16W	R4202	NRSA63J-563X	MG RESISTOR	56kΩ, 1/16W
R2024	NRVA63D-183X	CMF RESISTOR	18kΩ, 1/16W	R4203	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W
R2025	NRSA63J-823X	MG RESISTOR	82kΩ, 1/16W	R4204	NRSA63J-331X	MG RESISTOR	330Ω, 1/16W
R2026	NRSA63J-0R0X	MG RESISTOR	0Ω, 1/16W	R4205	NRSA63J-105X	MG RESISTOR	1MΩ, 1/16W
R2027	NRSA63J-102X	MG RESISTOR	1kΩ, 1/16W	R4206	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W
R2028	NRSA63J-102X	MG RESISTOR	1kΩ, 1/16W	R4207	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W
R2029	NRSA63J-0R0X	MG RESISTOR	0Ω, 1/16W	R4208	NRSA63J-472X	MG RESISTOR	4.7kΩ, 1/16W
R2030	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W	R4209	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W
R2031	NRSA63J-332X	MG RESISTOR	3.3kΩ, 1/16W	R4210	NRSA63J-105X	MG RESISTOR	1MΩ, 1/16W
R2032	NRSA63J-270X	MG RESISTOR	27Ω, 1/16W	R4211	NRSA63J-243X	MG RESISTOR	24kΩ, 1/16W
R2051	NRSA63J-102X	MG RESISTOR	1kΩ, 1/16W	R4214	NRSA63J-472X	MG RESISTOR	4.7kΩ, 1/16W
R2071	NRSA63J-473X	MG RESISTOR	47kΩ, 1/16W	R4215	NRSA63J-683X	MG RESISTOR	68kΩ, 1/16W
R2072	NRSA63J-562X	MG RESISTOR	5.6kΩ, 1/16W	R4216	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W
R2402	NRSA63J-332X	MG RESISTOR	3.3kΩ, 1/16W	R4217	NRSA63J-102X	MG RESISTOR	1kΩ, 1/16W
R2403	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W	R4218	NRSA63J-102X	MG RESISTOR	1kΩ, 1/16W
R3001	NRSA63J-105X	MG RESISTOR	1MΩ, 1/16W	R4219	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W
R3002	NRVA63D-471X	CMF RESISTOR	470Ω, 1/16W	R4220	NRSA63J-152X	MG RESISTOR	1.5kΩ, 1/16W
R3004	NRVA63D-333X	CMF RESISTOR	33kΩ, 1/16W	R4221	NRSA63J-334X	MG RESISTOR	330kΩ, 1/16W
R3006	NRVA63D-561X	CMF RESISTOR	560Ω, 1/16W	R4222	NRSA63J-154X	MG RESISTOR	150kΩ, 1/16W
R3007	NRVA63D-183X	CMF RESISTOR	18kΩ, 1/16W	R4223	NRSA63J-333X	MG RESISTOR	33kΩ, 1/16W
R3008	NRSA63J-393X	MG RESISTOR	39kΩ, 1/16W	R4224	NRSA63J-223X	MG RESISTOR	22kΩ, 1/16W
R3009	NRSA63J-272X	MG RESISTOR	2.7kΩ, 1/16W	R4251	NRSA63J-182X	MG RESISTOR	1.8kΩ, 1/16W
R3010	NRSA63J-332X	MG RESISTOR	3.3kΩ, 1/16W	R4252	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W
R3014	NRSA63J-681X	MG RESISTOR	680Ω, 1/16W	R4253	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W
R3015	NRSA63J-332X	MG RESISTOR	3.3kΩ, 1/16W	R4254	NRSA63J-684X	MG RESISTOR	680kΩ, 1/16W
R3016	NRSA63J-332X	MG RESISTOR	3.3kΩ, 1/16W	R4255	NRSA63J-222X	MG RESISTOR	2.2kΩ, 1/16W
R3018	NRSA63J-271X	MG RESISTOR	270Ω, 1/16W	R4256	NRSA63J-824X	MG RESISTOR	820kΩ, 1/16W
R3023	NRSA63J-331X	MG RESISTOR	330Ω, 1/16W	R4257	NRSA63J-822X	MG RESISTOR	8.2kΩ, 1/16W
R3027	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W	R4258	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W
R3028	NRVA63D-472X	CMF RESISTOR	4.7kΩ, 1/16W	R4259	NRSA63J-683X	MG RESISTOR	68kΩ, 1/16W
R3029	NRSA63J-0R0X	MG RESISTOR	0Ω, 1/16W	R4262	NRSA63J-302X	MG RESISTOR	3kΩ, 1/16W
R3030	NRSA63J-561X	MG RESISTOR	560Ω, 1/16W	▲ R4501	NRSA63J-6R8X	MG RESISTOR	6.8Ω, 1/16W
R3034	NRSA63J-220X	MG RESISTOR	22Ω, 1/16W	▲ R4502	NRSA63J-6R8X	MG RESISTOR	6.8Ω, 1/16W
R3038	NRSA63J-392X	MG RESISTOR	3.9kΩ, 1/16W	▲ R4503	NRSA63J-6R8X	MG RESISTOR	6.8Ω, 1/16W
R3501	NRSA63J-221X	MG RESISTOR	220Ω, 1/16W	▲ R4504	NRSA63J-6R8X	MG RESISTOR	6.8Ω, 1/16W
R3502	NRSA63J-102X	MG RESISTOR	1kΩ, 1/16W	R4505	NRSA63J-271X	MG RESISTOR	270Ω, 1/16W
R3504	NRSA63J-102X	MG RESISTOR	1kΩ, 1/16W	R4507	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W
R3505	NRSA63J-102X	MG RESISTOR	1kΩ, 1/16W	R4508	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W
R3506	NRSA63J-102X	MG RESISTOR	1kΩ, 1/16W	R4514	NRSA63J-223X	MG RESISTOR	22kΩ, 1/16W
R3507	NRSA63J-101X	MG RESISTOR	100Ω, 1/16W	R4515	NRSA63J-182X	MG RESISTOR	1.8kΩ, 1/16W
R3508	NRSA63J-153X	MG RESISTOR	15kΩ, 1/16W	R4702	NRSA63J-750X	MG RESISTOR	75Ω, 1/16W
R3901	NRSA63J-100X	MG RESISTOR	10Ω, 1/16W	R4703	NRVA63D-561X	CMF RESISTOR	560Ω, 1/16W
R3902	NRSA63J-101X	MG RESISTOR	100Ω, 1/16W	R4704	NRVA63D-271X	CMF RESISTOR	270Ω, 1/16W
R3903	NRSA63J-182X	MG RESISTOR	1.8kΩ, 1/16W	R4705	NRVA63D-471X	CMF RESISTOR	470Ω, 1/16W
R4001	NRSA63J-113X	MG RESISTOR	11kΩ, 1/16W	R4706	NRSA63J-681X	MG RESISTOR	680Ω, 1/16W
R4002	NRSA63J-123X	MG RESISTOR	12kΩ, 1/16W	R4707	NRSA63J-122X	MG RESISTOR	1.2kΩ, 1/16W
R4003	NRSA63J-153X	MG RESISTOR	15kΩ, 1/16W	R4708	NRSA63J-104X	MG RESISTOR	100kΩ, 1/16W
R4004	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W	R4709	NRSA63J-332X	MG RESISTOR	3.3kΩ, 1/16W
R4006	NRVA63D-103X	CMF RESISTOR	10kΩ, 1/16W	R4710	NRSA63J-332X	MG RESISTOR	3.3kΩ, 1/16W

# ▲ REF No.	PART No.	PART NAME, DESCRIPTION		# ▲ REF No.	PART No.	PART NAME, DESCRIPTION	
R4711	NRSA63J-151X	MG RESISTOR	150Ω,1/16W	R6307	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W
R4712	NRVA63D-561X	CMF RESISTOR	560Ω,1/16W	R6309	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W
R4713	NRSA63J-681X	MG RESISTOR	680Ω,1/16W	R6310	NRSA63J-152X	MG RESISTOR	1.5kΩ,1/16W
R4714	NRSA63J-122X	MG RESISTOR	1.2kΩ,1/16W	R6311	NRSA63J-473X	MG RESISTOR	47kΩ,1/16W
R4715	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W	R6403	NRSA63J-473X	MG RESISTOR	47kΩ,1/16W
R4716	NRVA63D-621X	CMF RESISTOR	620Ω,1/16W	R6404	NRSA63J-302X	MG RESISTOR	3kΩ,1/16W
R4717	NRVA63D-222X	CMF RESISTOR	2.2kΩ,1/16W	R6406	NRSA63J-183X	MG RESISTOR	18kΩ,1/16W
R4718	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W	R6407	NRSA63J-823X	MG RESISTOR	82kΩ,1/16W
R4719	NRSA63J-222X	MG RESISTOR	2.2kΩ,1/16W	R6503	NRSA63J-243X	MG RESISTOR	24kΩ,1/16W
R4721	NRVA63D-750X	CMF RESISTOR	75Ω,1/16W	R6504	NRSA63J-332X	MG RESISTOR	3.3kΩ,1/16W
R4722	NRVA63D-680X	CMF RESISTOR	68Ω,1/16W	R6506	NRSA63J-223X	MG RESISTOR	22kΩ,1/16W
R4723	NRVA63D-680X	CMF RESISTOR	68Ω,1/16W	R6507	NRSA63J-823X	MG RESISTOR	82kΩ,1/16W
R4735	NRSA63J-332X	MG RESISTOR	3.3kΩ,1/16W	R6603	NRVA63D-683X	CMF RESISTOR	68kΩ,1/16W
R4736	NRSA63J-332X	MG RESISTOR	3.3kΩ,1/16W	R6604	NRVA63D-392X	CMF RESISTOR	3.9kΩ,1/16W
R4737	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W	R6605	NRSA63J-274X	MG RESISTOR	270kΩ,1/16W
R4738	NRSA63J-332X	MG RESISTOR	3.3kΩ,1/16W	R6606	NRSA63J-272X	MG RESISTOR	2.7kΩ,1/16W
R4739	NRSA63J-332X	MG RESISTOR	3.3kΩ,1/16W	R6612	NRSA63J-823X	MG RESISTOR	82kΩ,1/16W
R4741	NRVA63D-152X	CMF RESISTOR	15kΩ,1/16W	R6613	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W
R4743	NRVA63D-153X	CMF RESISTOR	15kΩ,1/16W	R6614	NRSA63J-472X	MG RESISTOR	4.7kΩ,1/16W
R4744	NRVA63D-222X	CMF RESISTOR	2.2kΩ,1/16W	R6616	NRSA63J-392X	MG RESISTOR	3.9kΩ,1/16W
R4745	NRSA63J-471X	MG RESISTOR	470Ω,1/16W	R6622	NRVA63D-104X	CMF RESISTOR	100kΩ,1/16W
R4746	NRVA63D-222X	CMF RESISTOR	2.2kΩ,1/16W	R6623	NRVA63D-473X	CMF RESISTOR	47kΩ,1/16W
R4747	NRVA63D-471X	CMF RESISTOR	470Ω,1/16W	R6624	NRSA63J-273X	MG RESISTOR	27kΩ,1/16W
R5201	NRSA63J-243X	MG RESISTOR	24kΩ,1/16W	R6625	NRSA63J-822X	MG RESISTOR	8.2kΩ,1/16W
R5202	NRSA63J-220X	MG RESISTOR	22Ω,1/16W	R6626	NRVA63D-563X	CMF RESISTOR	56kΩ,1/16W
R5204	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W	R6627	NRVA63D-363X	CMF RESISTOR	36kΩ,1/16W
R5212	NRSA63J-101X	MG RESISTOR	100Ω,1/16W	R6701	NRSA63J-680X	MG RESISTOR	68Ω,1/16W
R5213	NRSA63J-101X	MG RESISTOR	100Ω,1/16W	R6702	NRSA63J-221X	MG RESISTOR	220Ω,1/16W
R5214	NRSA63J-101X	MG RESISTOR	100Ω,1/16W	R6704	NRVA63D-472X	CMF RESISTOR	4.7kΩ,1/16W
R5215	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W	R6706	NRZ0058-R20X	MG RESISTOR	0.2Ω,1/2W
R5216	NRSA63J-100X	MG RESISTOR	10Ω,1/16W	R6707	NRS016J-121X	MG RESISTOR	120Ω,1W
R5217	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W	R6708	NRS016J-121X	MG RESISTOR	120Ω,1W
R5218	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W	R6709	NRS016J-121X	MG RESISTOR	120Ω,1W
R5220	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W	R6710	NRVA63D-823X	CMF RESISTOR	82kΩ,1/16W
R6001	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W	R6711	NRVA63D-333X	CMF RESISTOR	33kΩ,1/16W
R6002	NRSA63J-333X	MG RESISTOR	33kΩ,1/16W	R6712	NRSA63J-222X	MG RESISTOR	2.2kΩ,1/16W
R6003	NRVA63D-912X	CMF RESISTOR	9.1kΩ,1/16W	R6713	NRSA63J-562X	MG RESISTOR	5.6kΩ,1/16W
R6004	NRVA63D-471X	CMF RESISTOR	470Ω,1/16W	R6801	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
R6005	NRVA63D-183X	CMF RESISTOR	18kΩ,1/16W	R6803	NRVA63D-223X	CMF RESISTOR	22kΩ,1/16W
R6006	NRSA63J-472X	MG RESISTOR	4.7kΩ,1/16W	R6804	NRVA63D-103X	CMF RESISTOR	10kΩ,1/16W
R6008	NRVA63D-183X	CMF RESISTOR	18kΩ,1/16W	R6810	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
R6009	NRSA63J-224X	MG RESISTOR	220kΩ,1/16W	R6811	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
R6010	NRSA63J-473X	MG RESISTOR	47kΩ,1/16W	R6813	NRVA63D-104X	CMF RESISTOR	100kΩ,1/16W
R6011	NRSA63J-473X	MG RESISTOR	47kΩ,1/16W	R6814	NRVA63D-683X	CMF RESISTOR	68kΩ,1/16W
R6012	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W	R6820	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
R6015	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W	R6961	NRSA63J-223X	MG RESISTOR	22kΩ,1/16W
R6016	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W	R7009	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
R6019	NRSA63J-222X	MG RESISTOR	2.2kΩ,1/16W	R7010	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
R6020	NRSA63J-224X	MG RESISTOR	220kΩ,1/16W	R7021	NRSA63J-0R0X	MG RESISTOR,77EA	0Ω,1/16W
R6103	NRVA63D-223X	CMF RESISTOR	22kΩ,1/16W	R7029	NRSA63J-0R0X	MG RESISTOR,77EA	0Ω,1/16W
R6104	NRVA63D-103X	CMF RESISTOR	10kΩ,1/16W	R7031	NRSA63J-474X	MG RESISTOR	470kΩ,1/16W
R6106	NRSA63J-333X	MG RESISTOR	33kΩ,1/16W	R7032	NRSA63J-223X	MG RESISTOR	22kΩ,1/16W
R6107	NRSA63J-222X	MG RESISTOR	2.2kΩ,1/16W	R7033	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W
R6108	NRVA63D-153X	CMF RESISTOR	15kΩ,1/16W	R7035	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W
R6109	NRVA63D-103X	CMF RESISTOR	10kΩ,1/16W	R7040	NRVA63D-333X	CMF RESISTOR	33kΩ,1/16W
R6110	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W	R7042	NRVA63D-123X	CMF RESISTOR	12kΩ,1/16W
R6203	NRVA63D-103X	CMF RESISTOR	10kΩ,1/16W	R7043	NRVA63D-123X	CMF RESISTOR	12kΩ,1/16W
R6204	NRVA63D-103X	CMF RESISTOR	10kΩ,1/16W	R7044	NRVA63D-432X	CMF RESISTOR,77EA	4.3kΩ,1/16W
R6303	NRVA63D-183X	CMF RESISTOR	18kΩ,1/16W		NRVA63D-752X	CMF RESISTOR,27EA	7.5kΩ,1/16W
R6304	NRVA63D-472X	CMF RESISTOR	4.7kΩ,1/16W	R7045	NRVA63D-103X	CMF RESISTOR	10kΩ,1/16W
R6306	NRS12BK-R47W	MG RESISTOR	0.47Ω,1/2W	R7046	NRSA63J-103X	MG RESISTOR,27EA	10kΩ,1/16W

# ▲ REF No.	PART No.	PART NAME, DESCRIPTION		# ▲ REF No.	PART No.	PART NAME, DESCRIPTION	
R7049	NRSA63J-680X	MG RESISTOR	68Ω, 1/16W	C112	NEA70JM-226X	E CAPACITOR	22μF, 6.3V
R7050	NRSA63J-680X	MG RESISTOR	68Ω, 1/16W	C113	NCB31EK-103X	CAPACITOR	0.01μF, 25V
R7051	NRSA63J-680X	MG RESISTOR	68Ω, 1/16W	C114	NCB31EK-103X	CAPACITOR	0.01μF, 25V
R7057	NRSA63J-0R0X	MG RESISTOR	0Ω, 1/16W	C115	NCF31EZ-104X	CAPACITOR	0.1μF, 25V
R7067	NRSA63J-223X	MG RESISTOR, 27EA	22kΩ, 1/16W	C116	NCB31EK-103X	CAPACITOR	0.01μF, 25V
	NRSA63J-682X	MG RESISTOR, 77EA	6.8kΩ, 1/16W	C118	NCF31EZ-104X	CAPACITOR	0.1μF, 25V
R7068	NRSA63J-223X	MG RESISTOR	22kΩ, 1/16W	C119	NCB31EK-103X	CAPACITOR	0.01μF, 25V
R7069	NRSA63J-223X	MG RESISTOR	22kΩ, 1/16W	C120	NCB31EK-103X	CAPACITOR	0.01μF, 25V
R7070	NRSA63J-223X	MG RESISTOR	22kΩ, 1/16W	C121	NCF31EZ-104X	CAPACITOR	0.1μF, 25V
R7071	NRSA63J-223X	MG RESISTOR	22kΩ, 1/16W	C122	NCF31EZ-104X	CAPACITOR	0.1μF, 25V
R7072	NRSA02J-122X	MG RESISTOR, 77EA	1.2kΩ, 1/10W	C123	NDC31HJ-100X	CAPACITOR	10pF, 50V
	NRSA02J-182X	MG RESISTOR, 27EA	1.8kΩ, 1/10W	C124	NDC31HJ-100X	CAPACITOR	10pF, 50V
R7073	NRSA02J-331X	MG RESISTOR, 27EA	330Ω, 1/10W	C125	NCB31EK-103X	CAPACITOR	0.01μF, 25V
	NRSA02J-821X	MG RESISTOR, 77EA	820Ω, 1/10W	C126	NDC31HJ-120X	CAPACITOR	12pF, 50V
R7074	NRSA63J-103X	MG RESISTOR	10kΩ, 1/16W	C127	NCB31CK-333X	CAPACITOR	0.033μF, 16V
R7077	NRVA63D-682X	CMF RESISTOR	6.8kΩ, 1/16W	C128	NCB21CK-474X	CAPACITOR	0.47μF, 16V
R7083	NRSA63J-105X	MG RESISTOR	1MΩ, 1/16W	C129	NCB31CK-333X	CAPACITOR	0.033μF, 16V
R7086	NRVA63D-123X	CMF RESISTOR	12kΩ, 1/16W	C131	NCF31EZ-104X	CAPACITOR	0.1μF, 25V
R7091	NRVA63D-123X	CMF RESISTOR	12kΩ, 1/16W	C132	NCF31EZ-104X	CAPACITOR	0.1μF, 25V
R7093	NRVA63D-223X	CMF RESISTOR	22kΩ, 1/16W	C133	NCF31EZ-104X	CAPACITOR	0.1μF, 25V
R7096	NRVA63D-123X	CMF RESISTOR	12kΩ, 1/16W	C134	NCF31EZ-104X	CAPACITOR	0.1μF, 25V
R7110	NRSA63J-105X	MG RESISTOR	1MΩ, 1/16W	C1201	NCB31HK-102X	CAPACITOR	0.001μF, 50V
R7112	NRVA63D-332X	CMF RESISTOR	3.3kΩ, 1/16W	C1202	NBE20JM-106X	T CAPACITOR	10μF, 6.3V
R7114	NRVA63D-223X	CMF RESISTOR	22kΩ, 1/16W	C1205	NCB31EK-153X	CAPACITOR	0.015μF, 25V
R7116	NRVA63D-332X	CMF RESISTOR	3.3kΩ, 1/16W	C1206	NBE20JM-106X	T CAPACITOR	10μF, 6.3V
R7118	NRVA63D-223X	CMF RESISTOR	22kΩ, 1/16W	C1601	NCB31EK-103X	CAPACITOR	0.01μF, 25V
R7120	NRVA63D-332X	CMF RESISTOR	3.3kΩ, 1/16W	C1602	NCB21CK-224X	CAPACITOR	0.22μF, 16V
R7122	NRVA63D-223X	CMF RESISTOR	22kΩ, 1/16W	C1603	NCB31CK-223X	CAPACITOR	0.022μF, 16V
R7124	NRVA63D-103X	CMF RESISTOR	10kΩ, 1/16W	C1604	NCB31CK-223X	CAPACITOR	0.022μF, 16V
R7127	NRVA63D-103X	CMF RESISTOR	10kΩ, 1/16W	C1605	NCB31CK-223X	CAPACITOR	0.022μF, 16V
R7128	NRVA63D-103X	CMF RESISTOR	10kΩ, 1/16W	C1606	NCB31CK-104X	CAPACITOR	0.1μF, 16V
R7129	NRVA63D-103X	CMF RESISTOR	10kΩ, 1/16W	C1607	NCB31CK-104X	CAPACITOR	0.1μF, 16V
R7130	NRVA63D-103X	CMF RESISTOR	10kΩ, 1/16W	C1608	NCB31CK-683X	CAPACITOR	0.068μF, 16V
R7131	NRVA63D-103X	CMF RESISTOR	10kΩ, 1/16W	C1609	NCB31CK-104X	CAPACITOR	0.1μF, 16V
R7132	NRVA63D-103X	CMF RESISTOR	10kΩ, 1/16W	C1610	NCB31CK-104X	CAPACITOR	0.1μF, 16V
R7139	NRVA63D-911X	CMF RESISTOR	910Ω, 1/16W	C1611	NCB31CK-104X	CAPACITOR	0.1μF, 16V
R7142	NRSA63J-0R0X	MG RESISTOR, 77EA	0Ω, 1/16W	C1612	NDC31HJ-331X	CAPACITOR	330pF, 50V
R7143	NRSA63J-0R0X	MG RESISTOR, 27EA	0Ω, 1/16W	C1613	NCB21CK-334X	CAPACITOR	0.33μF, 16V
R7213	NRSA63J-0R0X	MG RESISTOR	0Ω, 1/16W	C1614	NBE41AM-226X	T CAPACITOR	22μF, 10V
RA101	NRZ0038-222X	NETWORK RESISTOR	2.2kΩ	C1615	NCB31HK-681X	CAPACITOR	680pF, 50V
RA102	NRZ0038-222X	NETWORK RESISTOR	2.2kΩ	C1616	NCB21CK-474X	CAPACITOR	0.47μF, 16V
RA103	NRZ0038-222X	NETWORK RESISTOR	2.2kΩ	C1617	NCB31HK-152X	CAPACITOR	0.0015μF, 50V
RA104	NRZ0038-222X	NETWORK RESISTOR	2.2kΩ	C1618	NBE21AM-106X	T CAPACITOR	10μF, 10V
RA105	NRZ0038-473X	NETWORK RESISTOR	47kΩ	C1619	NCB31CK-223X	CAPACITOR	0.022μF, 16V
RA106	NRZ0037-331X	NETWORK RESISTOR	330Ω	C1620	NCB31HK-472X	CAPACITOR	0.0047μF, 50V
RA107	NRZ0034-102W	NETWORK RESISTOR	1kΩ	C1621	NBP41CM-106X	T CAPACITOR	10μF, 16V
RA108	NRZ0034-102W	NETWORK RESISTOR	1kΩ	C2001	NBE20JM-106X	T CAPACITOR	10μF, 6.3V
RA109	NRZ0038-474X	NETWORK RESISTOR	470kΩ	C2002	NFV41HJ-183X	MPPS CAPACITOR	0.018μF, 50V
RA4001	NRZ0034-100W	NETWORK RESISTOR, 77EA	10Ω	C2003	NDC31HJ-331X	CAPACITOR	330pF, 50V
RA4002	NRZ0034-100W	NETWORK RESISTOR, 77EA	10Ω	C2004	NBE20JM-226X	T CAPACITOR	22μF, 6.3V
RA4003	NRZ0034-100W	NETWORK RESISTOR, 77EA	10Ω	C2005	NCB21CK-105X	CAPACITOR	1μF, 16V
C102	NCF31EZ-104X	CAPACITOR	0.1μF, 25V	C2021	NCB31EK-103X	CAPACITOR	0.01μF, 25V
C103	NBE41AM-106X	T CAPACITOR	10μF, 10V	C2022	NBE20JM-156X	T CAPACITOR	15μF, 6.3V
C104	NCB31EK-103X	CAPACITOR	0.01μF, 25V	C2023	NBP21CM-105X	T CAPACITOR	1μF, 16V
C105	NCB31CK-104X	CAPACITOR	0.1μF, 16V	C2024	NCB31HK-102X	CAPACITOR	0.001μF, 50V
C106	NCF31EZ-104X	CAPACITOR	0.1μF, 25V	C2025	NCB30JK-105X	CAPACITOR	1μF, 6.3V
C107	NCB31EK-103X	CAPACITOR	0.01μF, 25V	C2026	NCB31HK-222X	CAPACITOR	0.0022μF, 50V
C108	NBE21AM-225X	T CAPACITOR	2.2μF, 10V	C2027	NCB30JK-474X	CAPACITOR	0.47μF, 6.3V
C109	NBE41AM-106X	T CAPACITOR	10μF, 10V	C2028	NCB30JK-105X	CAPACITOR	1μF, 6.3V
C110	NDC31HJ-101X	CAPACITOR	100pF, 50V	C2029	NCB30JK-105X	CAPACITOR	1μF, 6.3V
C111	NEA70JM-226X	E CAPACITOR	22μF, 6.3V	C2031	NCB31CK-104X	CAPACITOR	0.1μF, 16V

# ▲ REF No.	PART No.	PART NAME, DESCRIPTION		# ▲ REF No.	PART No.	PART NAME, DESCRIPTION	
C2032	NCB31HK-472X	CAPACITOR	0.0047μF,50V	C4049	NDC31HJ-100X	CAPACITOR	10pF,50V
C2033	NBE20JM-475X	T CAPACITOR	4.7μF,6.3V	C4051	NDC31HJ-221X	CAPACITOR	220pF,50V
C2034	NCB31CK-104X	CAPACITOR	0.1μF,16V	C4201	NEA71HM-225X	E CAPACITOR	2.2μF,50V
C2035	NBE20JM-226X	T CAPACITOR	22μF,6.3V	C4202	NCF31EZ-104X	CAPACITOR	0.1μF,25V
C2036	NBE20JM-106X	T CAPACITOR	10μF,6.3V	C4203	NCB31CK-104X	CAPACITOR	0.1μF,16V
C2037	NBE20JM-226X	T CAPACITOR	22μF,6.3V	C4205	NCB31EK-103X	CAPACITOR	0.01μF,25V
C2038	NCB30JK-474X	CAPACITOR	0.47μF,6.3V	C4206	NCB31CK-104X	CAPACITOR	0.1μF,16V
C2051	NCB31EK-103X	CAPACITOR	0.01μF,25V	C4207	NCB31EK-103X	CAPACITOR	0.01μF,25V
C2071	NBE20JM-106X	T CAPACITOR	10μF,6.3V	C4208	NCB31CK-104X	CAPACITOR	0.1μF,16V
C2072	NCB31HK-222X	CAPACITOR	0.0022μF,50V	C4209	NCF21CZ-105X	CAPACITOR	1μF,16V
C2401	NEA70GM-476X	E CAPACITOR	47μF,4.0V	C4210	NCF21CZ-105X	CAPACITOR	1μF,16V
C2402	NCB30JK-105X	CAPACITOR	1μF,6.3V	C4251	NEA71HM-335X	E CAPACITOR	3.3μF,50V
C2403	NBE20JM-475X	T CAPACITOR	4.7μF,6.3V	C4252	NCB31CK-104X	CAPACITOR	0.1μF,16V
C3002	NCB21CK-105X	CAPACITOR	1μF,16V	C4253	NCB31EK-153X	CAPACITOR	0.015μF,25V
C3003	NCB21CK-105X	CAPACITOR	1μF,16V	C4254	NCB31EK-153X	CAPACITOR	0.015μF,25V
C3004	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C4256	NEA71CM-106X	E CAPACITOR	10μF,16V
C3005	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C4503	NEA70JM-107X	E CAPACITOR	100μF,6.3V
C3006	NDC31HG-100X	CAPACITOR	10pF,50V	C4504	NCF31EZ-104X	CAPACITOR	0.1μF,25V
C3007	NDC31HG-100X	CAPACITOR	10pF,50V	C4505	NDC31HJ-330X	CAPACITOR	33pF,50V
C3009	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C4506	NCB31HK-102X	CAPACITOR	0.001μF,50V
C3011	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C4507	NCB31HK-102X	CAPACITOR	0.001μF,50V
C3012	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C4508	NCB31HK-102X	CAPACITOR	0.001μF,50V
C3013	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C4509	NCB31HK-102X	CAPACITOR	0.001μF,50V
C3014	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C4510	NCB31CK-104X	CAPACITOR	0.1μF,16V
C3015	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C4511	NCF31EZ-104X	CAPACITOR	0.1μF,25V
C3017	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C4701	NBE20JM-106X	T CAPACITOR	10μF,6.3V
C3019	NCB31EK-103X	CAPACITOR	0.01μF,25V	C4702	NCF31EZ-104X	CAPACITOR	0.1μF,25V
C3020	NCB31EK-103X	CAPACITOR	0.01μF,25V	C4703	NBE20JM-106X	T CAPACITOR	10μF,6.3V
C3027	NCB31EK-103X	CAPACITOR	0.01μF,25V	C4704	NCB21CK-105X	CAPACITOR	1μF,16V
C3028	NCB31EK-103X	CAPACITOR	0.01μF,25V	C4705	NDC31HJ-820X	CAPACITOR	82pF,50V
C3033	NCB31CK-104X	CAPACITOR	0.1μF,16V	C4706	NDC31HJ-150X	CAPACITOR	15pF,50V
C3037	NDC31HJ-100X	CAPACITOR	10pF,50V	C4707	NCB21CK-105X	CAPACITOR	1μF,16V
C3506	NCB31EK-103X	CAPACITOR	0.01μF,25V	C4708	NDC31HJ-820X	CAPACITOR	82pF,50V
C3507	NCB31EK-103X	CAPACITOR	0.01μF,25V	C4709	NDC31HJ-150X	CAPACITOR	15pF,50V
C3508	NCB31EK-103X	CAPACITOR	0.01μF,25V	C4710	NCB31EK-103X	CAPACITOR	0.01μF,25V
C3509	NDC31HJ-221X	CAPACITOR	220pF,50V	C4711	NCB21CK-105X	CAPACITOR	1μF,16V
C3510	NCB31CK-104X	CAPACITOR	0.1μF,16V	C4715	NCB21CK-105X	CAPACITOR	1μF,16V
C3512	NCB10JK-106X	CAPACITOR	10μF,6.3V	C4719	NCB31EK-103X	CAPACITOR	0.01μF,25V
C3513	NCB31CK-223X	CAPACITOR	0.022μF,16V	C5203	NCB10JK-106X	CAPACITOR	10μF,6.3V
C3514	NCB21CK-105X	CAPACITOR	1μF,16V	C5207	NCB31EK-103X	CAPACITOR	0.01μF,25V
C3515	NCB31EK-103X	CAPACITOR	0.01μF,25V	C5208	NCB31EK-103X	CAPACITOR	0.01μF,25V
C3516	NDC31HJ-100X	CAPACITOR	10pF,50V	C5209	NCB31EK-103X	CAPACITOR	0.01μF,25V
C3902	NCB31EK-103X	CAPACITOR	0.01μF,25V	C5210	NCF31EZ-104X	CAPACITOR	0.1μF,25V
C3903	NDC31HJ-3R0X	CAPACITOR	3pF,50V	C5211	NCB21CK-105X	CAPACITOR	1μF,16V
C4006	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5212	NCB21CK-105X	CAPACITOR	1μF,16V
C4008	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5213	NCB31HK-332X	CAPACITOR	0.0033μF,50V
C4009	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5214	NCB31EK-103X	CAPACITOR	0.01μF,25V
C4010	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5218	NCF31EZ-104X	CAPACITOR	0.1μF,25V
C4012	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5219	NBP21CM-685X	T CAPACITOR	6.8μF,16V
C4014	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5221	NCB11EK-105X	CAPACITOR	1μF,25V
C4017	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5222	NCB31CK-104X	CAPACITOR	0.1μF,16V
C4019	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5223	NCF31EZ-104X	CAPACITOR	0.1μF,25V
C4022	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5225	NCF31EZ-104X	CAPACITOR	0.1μF,25V
C4024	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5227	NCB31CK-104X	CAPACITOR	0.1μF,16V
C4028	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5228	NCF31EZ-104X	CAPACITOR	0.1μF,25V
C4029	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5229	NCB11EK-105X	CAPACITOR	1μF,25V
C4030	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5230	NCB21EK-104X	CAPACITOR	0.1μF,25V
C4036	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C5232	NDC31HJ-100X	CAPACITOR	10pF,50V
C4040	NCB21CK-105X	CAPACITOR	1μF,16V	C5233	NDC31HJ-100X	CAPACITOR	10pF,50V
C4044	NCB21CK-105X	CAPACITOR	1μF,16V	C5234	NDC31HJ-100X	CAPACITOR	10pF,50V
C4048	NCB10JK-106X	CAPACITOR	10μF,6.3V	C5235	NDC31HJ-100X	CAPACITOR	10pF,50V

# ▲ REF No.	PART No.	PART NAME, DESCRIPTION		# ▲ REF No.	PART No.	PART NAME, DESCRIPTION	
C5236	NDC31HJ-100X	CAPACITOR	10pF,50V	C7001	NCB31EK-103X	CAPACITOR	0.01μF,25V
C5237	NDC31HJ-100X	CAPACITOR	10pF,50V	C7002	NBE20JM-106X	T CAPACITOR	10μF,6.3V
C6002	NEA71CM-106X	E CAPACITOR	10μF,16V	C7013	NCB30JK-105X	CAPACITOR	1μF,6.3V
C6004	NCF21CZ-105X	CAPACITOR	1μF,16V	C7019	NDC31HJ-121X	CAPACITOR	120pF,50V
C6005	NCB21CK-105X	CAPACITOR	1μF,16V	C7020	NDC31HJ-151X	CAPACITOR	150pF,50V
C6006	NCF21CZ-105X	CAPACITOR	1μF,16V	C7021	NBP41EM-475X	T CAPACITOR	4.7μF,25V
C6007	NCB21CK-105X	CAPACITOR	1μF,16V	C7022	NCB31EK-103X	CAPACITOR	0.01μF,25V
C6009	NDC31HJ-820X	CAPACITOR	82pF,50V	C7023	NCB31EK-103X	CAPACITOR	0.01μF,25V
C6010	NCB21CK-224X	CAPACITOR	0.22μF,16V	C7024	NBP41EM-475X	T CAPACITOR	4.7μF,25V
C6011	NCB21CK-104X	CAPACITOR	0.1μF,16V	C7025	NCB31EK-103X	CAPACITOR	0.01μF,25V
C6012	NCB21CK-224X	CAPACITOR	0.22μF,16V	C7026	NBE20JM-106X	T CAPACITOR	10μF,6.3V
C6013	NCB31EK-473X	CAPACITOR	0.047μF,25V	C7028	NCB31EK-103X	CAPACITOR	0.01μF,25V
C6014	NCB31EK-473X	CAPACITOR	0.047μF,25V	C7029	NCB31CK-104X	CAPACITOR,27EA	0.1μF,16V
C6015	NCB31EK-473X	CAPACITOR	0.047μF,25V	C7030	NCB31EK-103X	CAPACITOR	0.01μF,25V
C6016	NCB31EK-473X	CAPACITOR	0.047μF,25V	C7031	NDC31HJ-220X	CAPACITOR	22pF,50V
C6017	NCF21CZ-105X	CAPACITOR	1μF,16V	C7032	NCB31CK-104X	CAPACITOR	0.1μF,16V
C6101	NCB21CK-105X	CAPACITOR	1μF,16V	C7033	NCB21CK-334X	CAPACITOR	0.33μF,16V
C6102	NCB10JK-106X	CAPACITOR	10μF,6.3V	C7034	NDC31HJ-331X	CAPACITOR	330pF,50V
C6105	NCB31HK-102X	CAPACITOR	0.001μF,50V	C7035	NDC31HJ-330X	CAPACITOR	33pF,50V
C6106	NCF21CZ-105X	CAPACITOR	1μF,16V	C7036	NCB31CK-104X	CAPACITOR	0.1μF,16V
C6107	NCF21CZ-105X	CAPACITOR	1μF,16V	C7037	NDC31HJ-330X	CAPACITOR	33pF,50V
C6108	NCF21CZ-105X	CAPACITOR	1μF,16V	C7038	NCB31EK-103X	CAPACITOR	0.01μF,25V
C6110	NCB31HK-152X	CAPACITOR	0.0015μF,50V	C7039	NBP41CM-106X	T CAPACITOR	10μF,16V
C6201	NCB21CK-105X	CAPACITOR	1μF,16V	C7042	NCB31EK-103X	CAPACITOR	0.01μF,25V
C6202	NCB10JK-106X	CAPACITOR	10μF,6.3V	C7045	NDC31HJ-100X	CAPACITOR	10pF,50V
C6203	NEA70JM-476X	E CAPACITOR	47μF,6.3V	C7046	NDC31HJ-100X	CAPACITOR	10pF,50V
C6205	NCB31HK-472X	CAPACITOR	0.0047μF,50V	C7047	NDC31HJ-100X	CAPACITOR	10pF,50V
C6210	NCB31EK-103X	CAPACITOR	0.01μF,25V	C7048	NBE20JM-106X	T CAPACITOR	10μF,6.3V
C6301	NCB11CK-225X	CAPACITOR	2.2μF,16V	C7051	NCB31EK-103X	CAPACITOR	0.01μF,25V
C6302	NCB10JK-106X	CAPACITOR	10μF,6.3V	C7052	NBE20JM-106X	T CAPACITOR	10μF,6.3V
C6303	NEA70JM-226X	E CAPACITOR	22μF,6.3V	C7053	NCB31EK-103X	CAPACITOR	0.01μF,25V
C6305	NCB31HK-561X	CAPACITOR	560pF,50V	C7054	NBP41EM-475X	T CAPACITOR	4.7μF,25V
C6307	NEA71CM-106X	E CAPACITOR	10μF,16V	C7057	NCB31EK-682X	CAPACITOR,27EA	0.0068μF,25V
C6308	NBE20JM-106X	T CAPACITOR	10μF,6.3V	C7059	NBP41EM-475X	T CAPACITOR	4.7μF,25V
C6310	NCB31HK-102X	CAPACITOR	0.001μF,50V	C7060	NCB11CK-225X	CAPACITOR	2.2μF,16V
C6401	NCB21CK-105X	CAPACITOR	1μF,16V	C7064	NCB11EK-105X	CAPACITOR	1μF,25V
C6402	NCF21CZ-105X	CAPACITOR	1μF,16V	C7065	NCB11EK-105X	CAPACITOR	1μF,25V
C6406	NCB31CK-683X	CAPACITOR	0.068μF,16V	C7066	NCB11EK-105X	CAPACITOR	1μF,25V
C6410	NCB21CK-474X	CAPACITOR	0.47μF,16V	C7067	NCB31CK-104X	CAPACITOR	0.1μF,16V
C6501	NCB21CK-105X	CAPACITOR	1μF,16V	C7069	NCB31EK-103X	CAPACITOR	0.01μF,25V
C6502	NCF21CZ-105X	CAPACITOR	1μF,16V	L101	NQL034K-330X	COIL	33μH
C6506	NCB21CK-224X	CAPACITOR	0.22μF,16V	L501	NQR0129-002X	FERRITE BEAD	
C6510	NCB31CK-104X	CAPACITOR	0.1μF,16V	L1601	NQL38DK-100X	COIL	10μH
C6601	NCB11CK-225X	CAPACITOR	2.2μF,16V	L1602	NQL144K-100X	COIL	10μH
C6602	NCF21CZ-105X	CAPACITOR	1μF,16V	L2001	NQL144K-101X	COIL	100μH
C6603	NCB11CK-475X	CAPACITOR	4.7μF,16V	L2003	NQL034K-470X	COIL	47μH
C6605	NDC31HJ-331X	CAPACITOR	330pF,50V	L2021	NQL144K-470X	COIL	47μH
C6606	NCF21CZ-105X	CAPACITOR	1μF,16V	L2051	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
C6607	NCB11EK-105X	CAPACITOR	1μF,25V	L2052	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
C6610	NCB31EK-103X	CAPACITOR	0.01μF,25V	L2071	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
C6616	NCB21CK-105X	CAPACITOR	1μF,16V	L2072	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
C6622	NCB21CK-105X	CAPACITOR	1μF,16V	L2401	NQL144K-470X	COIL	47μH
C6700	NCB31HK-272X	CAPACITOR	0.0027μF,50V	L3002	NQR0006-001X	FERRITE BEAD	
C6701	NCF21CZ-105X	CAPACITOR	1μF,16V	L3003	NQR0129-002X	FERRITE BEAD	
C6702	NCB41CK-106X	CAPACITOR	10μF,16V	L3502	NQL38DK-220X	COIL	22μH
C6711	NCB21HK-472X	CAPACITOR	0.0047μF,50V	L3503	NQL085J-5R6X	COIL	5.6μH
C6802	NCF21CZ-105X	CAPACITOR	1μF,16V	L4005	NQL38DK-220X	COIL	22μH
C6805	NCB31HK-102X	CAPACITOR	0.001μF,50V	L4201	NQR0006-001X	FERRITE BEAD	
C6810	NCB31EK-103X	CAPACITOR	0.01μF,25V	L4501	NQR0006-001X	FERRITE BEAD	
C6812	NCF21CZ-105X	CAPACITOR	1μF,16V	L4502	NQL034K-220X	COIL	22μH
C6820	NCB31HK-102X	CAPACITOR	0.001μF,50V	L4701	NQL38DK-220X	COIL	22μH

# ▲ REF No.	PART No.	PART NAME, DESCRIPTION	
L5201	NQL38DK-470X	COIL	47μH
L5202	NQL38DK-220X	COIL	22μH
L5203	NQL38DK-220X	COIL	22μH
L6001	NQL52EM-100X	COIL	10μH
L6002	NQL52EM-100X	COIL	10μH
L6101	NQL52EM-390X	COIL	39μH
L6106	NQL144K-101X	COIL	100μH
L6107	NQL144K-101X	COIL	100μH
L6201	NQL52EM-470X	COIL	47μH
L6301	NQL52EM-390X	COIL	39μH
L6306	NQL52EM-470X	COIL	47μH
L6401	NQL52EM-470X	COIL	47μH
L6501	NQL52EM-470X	COIL	47μH
L6601	NQL52EM-221X	COIL	220μH
L6602	NQL144K-221X	COIL	220μH
L6606	NQL144K-220X	COIL	22μH
L6701	NQL52EM-100X	COIL	10μH
L7001	NQL38DK-220X	COIL	22μH
L7005	NQL38DK-220X	COIL	22μH
L7006	NQL38DK-220X	COIL	22μH
L7007	NQL38DK-220X	COIL	22μH
L7008	NQL38DK-220X	COIL	22μH
L7009	NQL38DK-220X	COIL	22μH
L7010	NQL085J-4R7X	COIL	4.7μH
L7012	NQL144K-100X	COIL	10μH
X101	NAX0251-001X	CRYSTAL RESONATOR	
X102	NAX0325-001X	CRYSTAL RESONATOR	
X3001	QAX0596-001	CRYSTAL RESONATOR	
WR1	WJV0039-001A	E-PRIMARY WIRE, JUMP WIRE	
WR2	WJM0180-001B	E-SI C WIRE C-F,77EA	
WR3	YU40017-025-1	THIN WIRE,JP2005-SD2,77EA	
▲ J101	QAB0022-001	LI BATTERY	
J504	LY31356-002A	JACK UNIT	
J505	QND0068-001	S JACK	
CN1	QGF0507F3-10X	FFC/FPC CONNECTOR	
CN2	QGF0507F3-14X	FFC/FPC CONNECTOR	
CN3	QGF0505F2-18X	FPC CONNECTOR	
CN4	QGA1201F2-06X	CONNECTOR	
CN5	QGF0507F1-11X	FPC CONNECTOR	
CN7	QGF0507F3-11X	FFC/FPC CONNECTOR	
CN8	QGA1201C2-02X	CONNECTOR	
CN12	QGA1201F2-05X	CONNECTOR	
CN13	QGF0507F3-14X	FFC/FPC CONNECTOR	
CN15	QGF0507F1-22X	FPC CONNECTOR	
CN16	QGF0305F1-33X	FPC CONNECTOR	
CN18	QGF0507F3-12X	FFC/FPC CONNECTOR	
CN19	QGF0301F1-39X	FPC CONNECTOR,77EA	
CN22	QGF0507F3-14X	FFC/FPC CONNECTOR	
CN25	QGB0506L1-30X	CONNECTOR	
CN27	QGA1201C2-02X	CONNECTOR	
CN28	QGA1002F1-13X	CONNECTOR	
▲ F6001	NMFZ007-2R0X-K	FUSE	T2.0A
▲ F6002	NMFZ010-R50X-A	FUSE	T0.5A
SD1	LY42914-001A	SHIELD PLATE	
SD2	LY42845-001A	SHIELD SHEET,77EA	
OT1	LY30016-049A	SPACER-A,FOR WR1	
OT2	LY30029-0B6A	SPACER(A),FOR LI BATTERY	

# ▲ REF No.	PART No.	PART NAME, DESCRIPTION	

DSC BOARD ASSEMBLY <08> (SXM77EA)			
PW	YB20898A	DSC BOARD ASSY	
IC8001	JCY0076B	IC	
IC8002	M32000D3FP	IC	
	or M32000D4AFP	IC(MICRO C ROM)	
	or M32000D4BFP	IC(MICRO C ROM)	
IC8003	TC58FVT16FT0/79	IC(MICRO C ROM)	
IC8006	MAX3221CAE	IC	
IC8007	TC7WU04FU	IC(DIGITAL)	
R8002	NRSA63J-101X	MG RESISTOR	100Ω,1/16W
R8003	NRSA63J-101X	MG RESISTOR	100Ω,1/16W
R8004	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W
R8005	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W
R8006	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
R8007	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
R8012	NRSA63J-472X	MG RESISTOR	4.7kΩ,1/16W
R8014	NRSA63J-100X	MG RESISTOR	10Ω,1/16W
R8015	NRSA63J-100X	MG RESISTOR	10Ω,1/16W
R8016	NRSA63J-100X	MG RESISTOR	10Ω,1/16W
R8017	NRSA63J-100X	MG RESISTOR	10Ω,1/16W
R8018	NRSA63J-100X	MG RESISTOR	10Ω,1/16W
R8019	NRSA63J-100X	MG RESISTOR	10Ω,1/16W
R8020	NRSA63J-100X	MG RESISTOR	10Ω,1/16W
R8021	NRSA63J-100X	MG RESISTOR	10Ω,1/16W
R8022	NRSA63J-100X	MG RESISTOR	10Ω,1/16W
R8023	NRSA63J-100X	MG RESISTOR	10Ω,1/16W
R8024	NRSA63J-100X	MG RESISTOR	10Ω,1/16W
R8025	NRSA63J-100X	MG RESISTOR	10Ω,1/16W
R8026	NRSA63J-100X	MG RESISTOR	10Ω,1/16W
R8027	NRSA63J-105X	MG RESISTOR	1MΩ,1/16W
R8029	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
R8030	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
C8001	NCB31CK-104X	CAPACITOR	0.1μF,16V
C8002	NBE20JM-106X	T CAPACITOR	10μF,6.3V
C8003	NCB31CK-104X	CAPACITOR	0.1μF,16V
C8005	NCB31CK-104X	CAPACITOR	0.1μF,16V
C8006	NCB31CK-104X	CAPACITOR	0.1μF,16V
C8007	NCB31CK-104X	CAPACITOR	0.1μF,16V
C8008	NCB31CK-104X	CAPACITOR	0.1μF,16V
C8009	NCB31CK-104X	CAPACITOR	0.1μF,16V
C8010	NCB31CK-104X	CAPACITOR	0.1μF,16V
C8011	NCB31CK-104X	CAPACITOR	0.1μF,16V
C8012	NCB31CK-104X	CAPACITOR	0.1μF,16V
C8013	NCB31CK-104X	CAPACITOR	0.1μF,16V
C8014	NBE50JM-107X	T CAPACITOR	100μF,6.3V
C8015	NCB31CK-104X	CAPACITOR	0.1μF,16V
C8016	NCB31CK-104X	CAPACITOR	0.1μF,16V
C8017	NCB31HK-102X	CAPACITOR	0.001μF,50V
C8018	NCB31CK-104X	CAPACITOR	0.1μF,16V
C8019	NCB31CK-104X	CAPACITOR	0.1μF,16V
C8020	NCB31CK-104X	CAPACITOR	0.1μF,16V
C8021	NCB31CK-104X	CAPACITOR	0.1μF,16V
C8022	NCB31CK-104X	CAPACITOR	0.1μF,16V
C8023	NCB31CK-104X	CAPACITOR	0.1μF,16V
C8024	NCB31CK-104X	CAPACITOR	0.1μF,16V
C8025	NBE50JM-107X	T CAPACITOR	100μF,6.3V
C8026	NCB31CK-104X	CAPACITOR	0.1μF,16V
C8032	NCB31CK-104X	CAPACITOR	0.1μF,16V

#  REF No.	PART No.	PART NAME, DESCRIPTION		#  REF No.	PART No.	PART NAME, DESCRIPTION
C8033	NCB31CK-104X	CAPACITOR	0.1μF,16V			
C8034	NCB31CK-104X	CAPACITOR	0.1μF,16V			
C8035	NCB31CK-104X	CAPACITOR	0.1μF,16V			
C8036	NCB31CK-104X	CAPACITOR	0.1μF,16V			
C8037	NCB31CK-104X	CAPACITOR	0.1μF,16V			
C8038	NBE20JM-106X	T CAPACITOR	10μF,6.3V			
C8040	NDC31HJ-270X	CAPACITOR	27pF,50V			
C8041	NBE20JM-106X	T CAPACITOR	10μF,6.3V			
C8042	NBE20JM-106X	T CAPACITOR	10μF,6.3V			
C8043	NBE20JM-106X	T CAPACITOR	10μF,6.3V			
C8044	NBE20JM-106X	T CAPACITOR	10μF,6.3V			
L8001	NQL024J-100X	COIL	10μH			
L8002	NQL034K-150X	COIL	15μH			
L8003	NQL024J-100X	COIL	10μH			
L8004	NQL024J-100X	COIL	10μH			
L8005	NQR0129-002X	FERRITE BEAD				
X8001	NAX0354-001X	RESONATOR				
WR1	WJM0179-001B	E-SI C WIRE C-F,JP8001/JP8002				
J8001	QNS0181-001	2.5 JACK				
CN8001	QGF0301F1-39X	FPC CONNECTOR				