


SECTION 5 PARTS LIST

SAFETY PRECAUTION

Parts identified by the ⚠ symbol are critical for safety. Replace only with specified part numbers.

5.1 PACKING AND ACCESSORY ASSEMBLY <M1>

The instruction manual to be provided with this product will differ according to the destination.

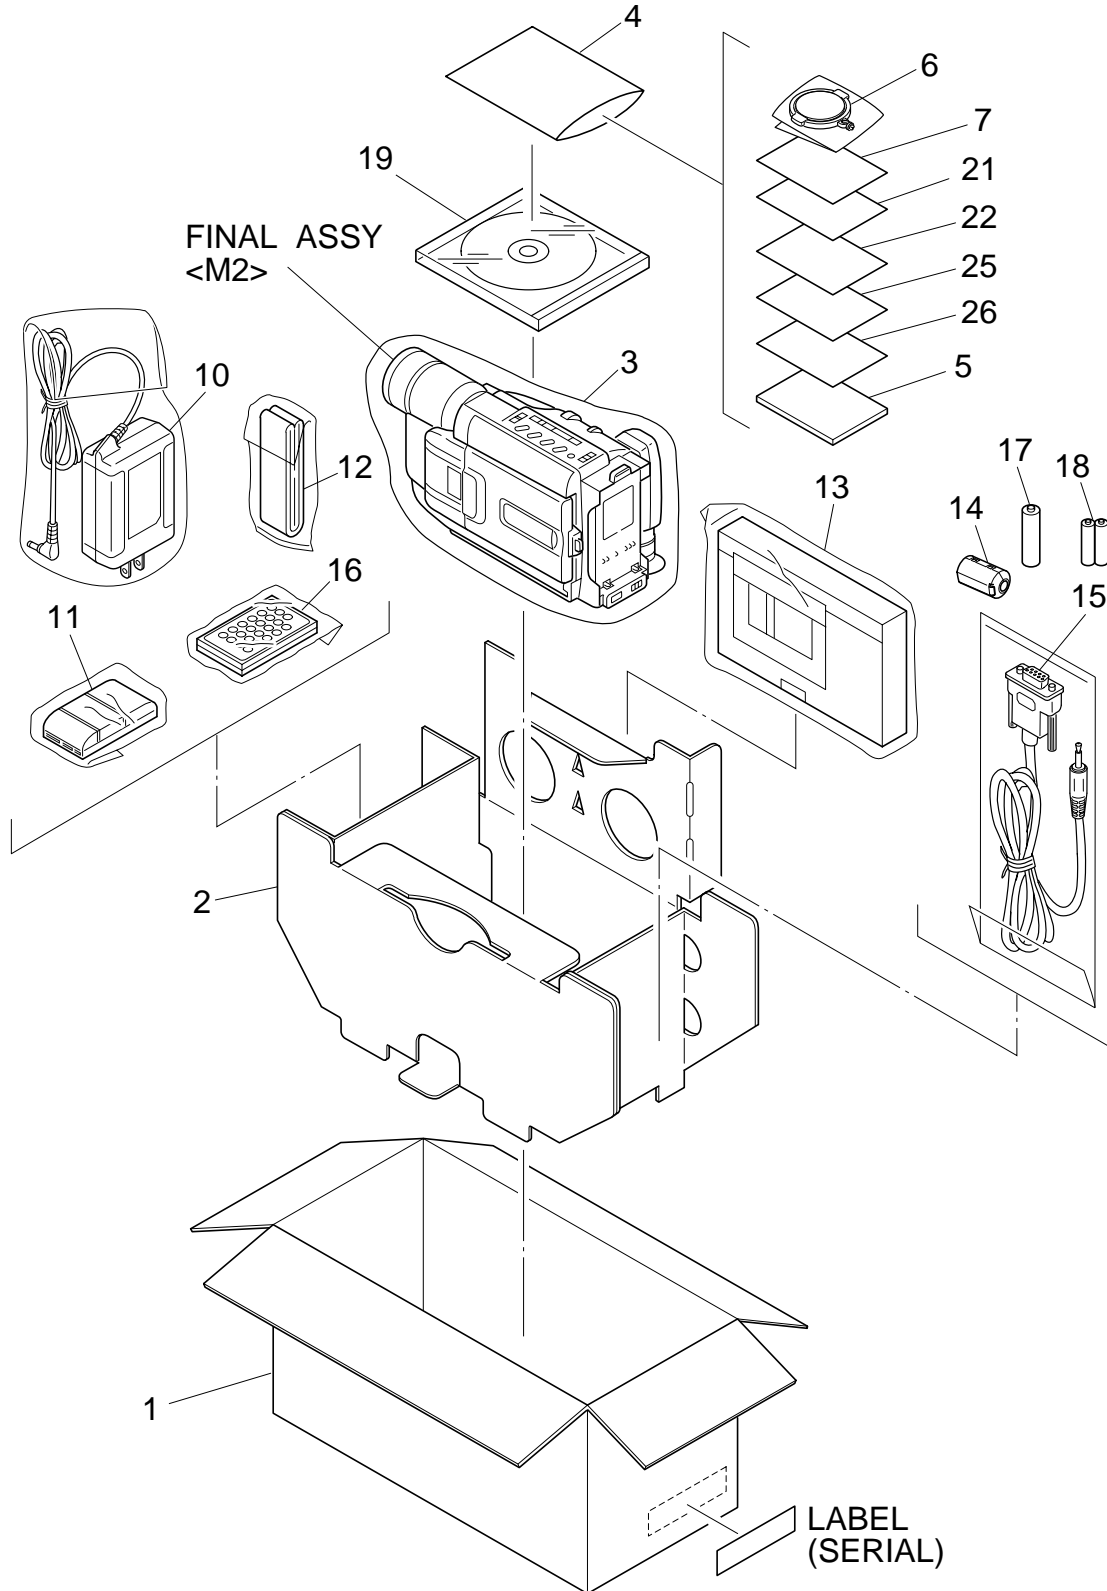

#	△ REF No.	PART No.	PART NAME, DESCRIPTION


PACKING AND ACCESSORY ASSEMBLY <M1>

1	LY32179-004A	PACKING CASE,A
	LY32179-005A	PACKING CASE,B,C,D
2	LY32065-001A	CUSHION
3	LY30023-002A	POLY BAG
4	QPA02003506	POLY BAG
△ 5	LYT0692-001B	IB(EN),A
△	LYT0705-001B	IB(EN),B,C
△	LYT0721-001B	IB(FR),C
△	LYT0778-001A	IB(EN),D
6	LY41538-002B	LENS CAP
7	BT-51020-2	REGIST.CARD,A,B,D
	BT-52004-1	WARRANTY CARD,C
△ 10	LY20739-001A	AC ADAPTER,AP-V10U
△ 11	YQ10629A	BATTERY PACK,BN-V11U,B,C,D
△	LY31199-001A	BATTERY PACK, BN-V20BU,A
12	LY20186-001A	SHOULDER STRAP
13	YQ31963A-3	CASSETTE ADAPTER
	or YQ31963B-3	CASSETTE ADAPTER
14	QQR0491-002	CORE FILTER,B,C,D
15	QAM0084-001	PC CONNECTION CABLE,B,C,D
16	LY42129-001A	REMOTE CONTROL UNIT,RM-V715U,B,C,D
17	—	AA(R6)BATTERY,FOR CASSETTE ADAPTER
18	—	AAA(R03)BATTERY,FOR RCU,X2 B,C,D
19	LY32210-007A	CD ROM,B,C,D
21	BT-20071B	SER.NET CARD,C
22	YU30843-4	SOFT WARE PERM. B,C,D
△ 25	LYT0309-001B	IB(SOFT)(EN),B,C,D
26	LYT0309-004A	SHEET(INSTALL),B,C,D

• **INSTRUCTIONS**
 EN ENGLISH
 FR FRENCH

MODEL	MARK
GR-SXM335U	A
GR-SXM730U	B
GR-SXM730UC	C
GR-SXM735U	D

5.2 FINAL ASSEMBLY <M2>

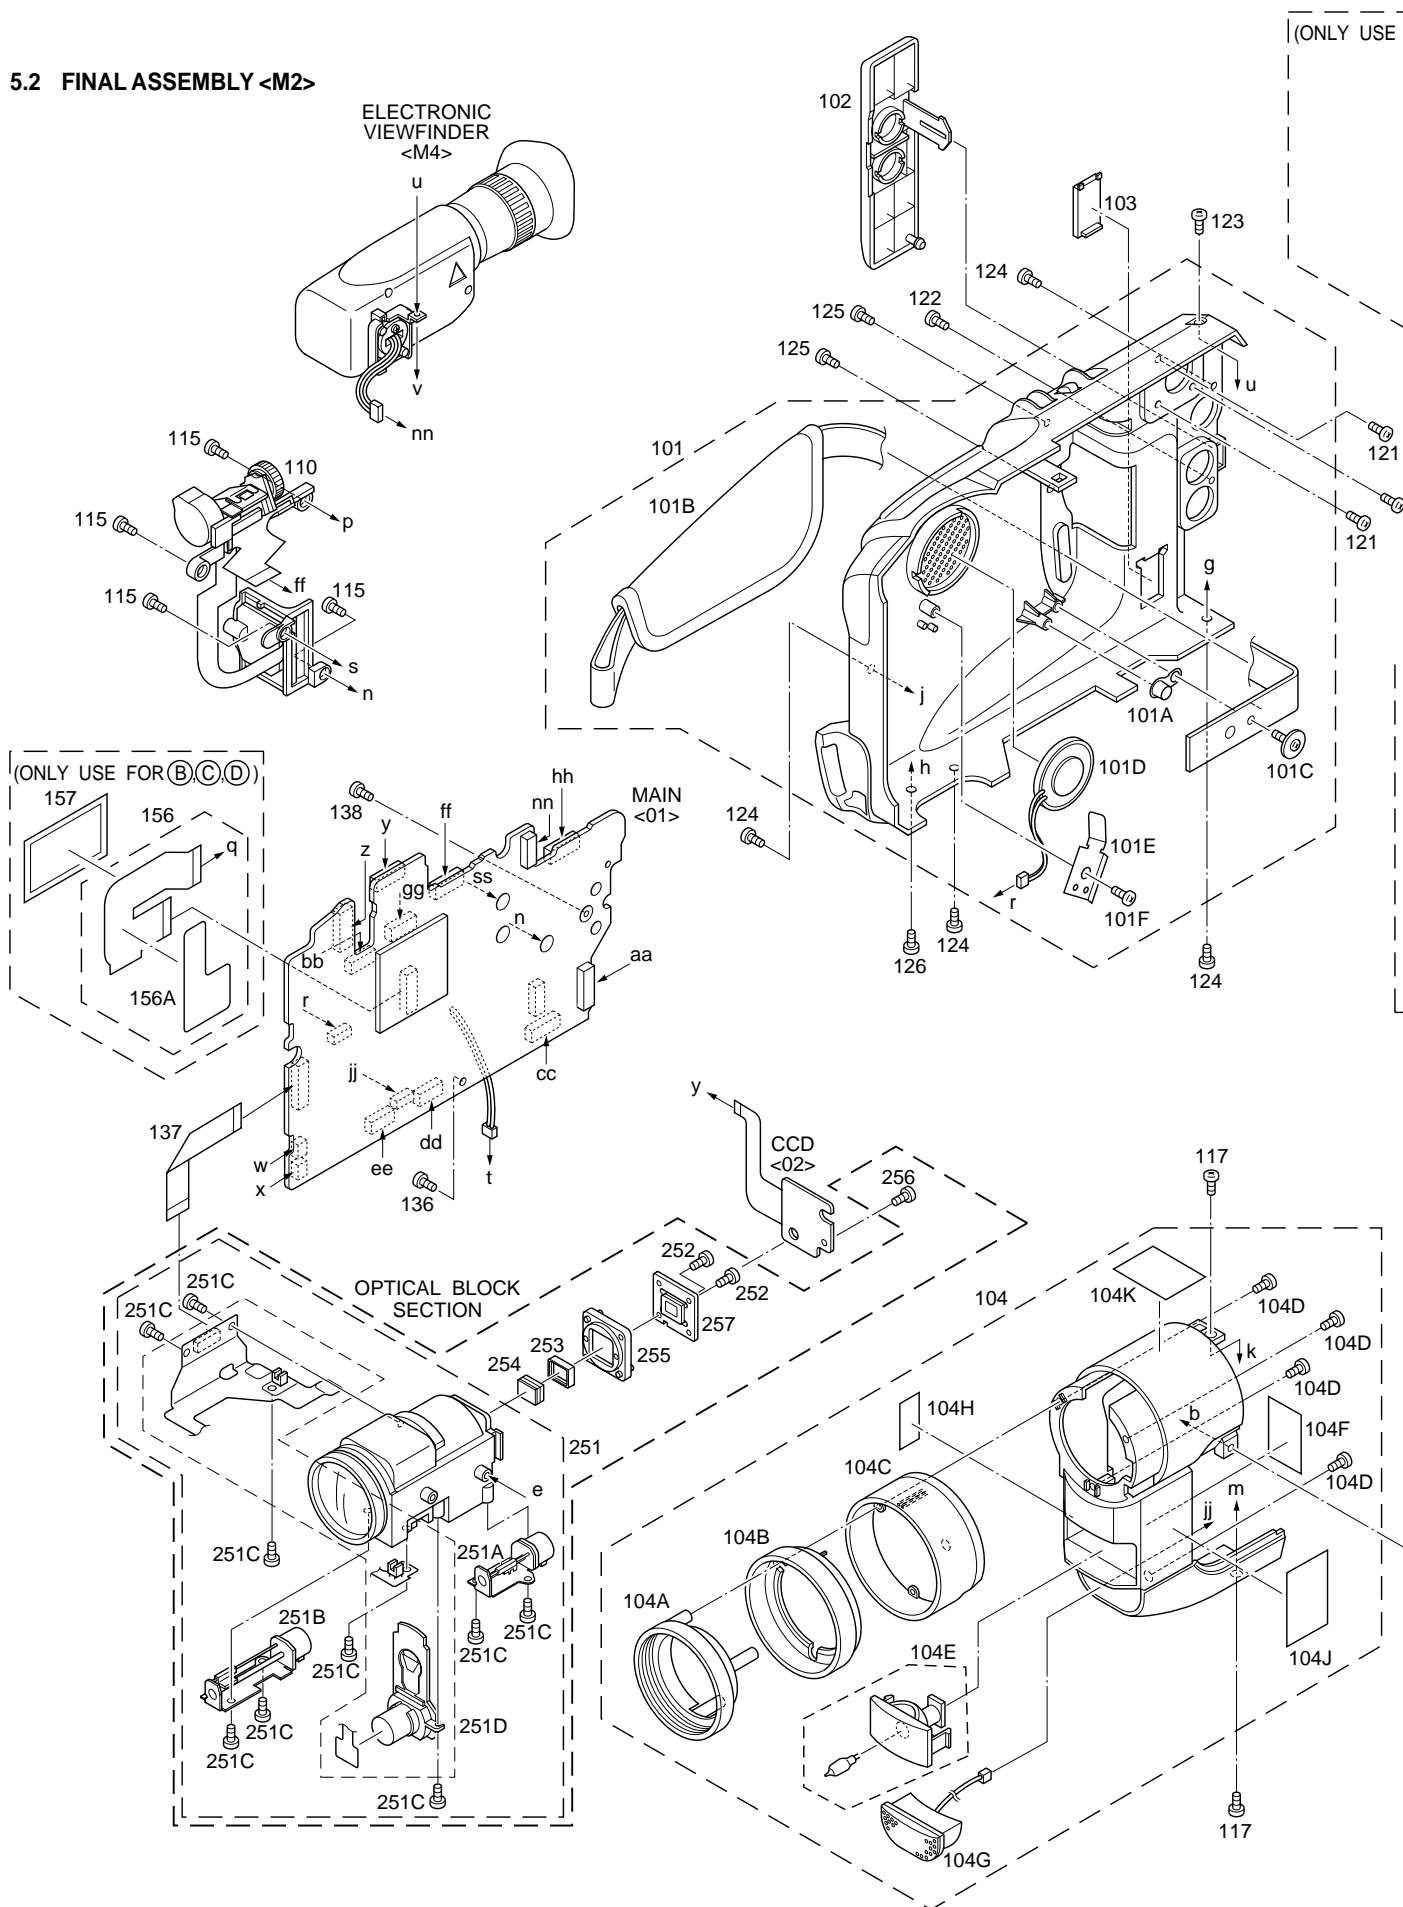

#	△	REF No.	PART No.	PART NAME, DESCRIPTION

FINAL ASSEMBLY <M2>				
101			LY20684-008A	LOWER CASE ASSY,A
			LY20684-009A	LOWER CASE ASSY,B,C,D
101A			LY40081-001A	CAPACITOR
101B			LY20682-001A	GRIP BELT
101C			LY30018-003A	SPECIAL SCREW
101D			QAS0061-001	SPEAKER
101E			LY42764-001B	HOLDER(SPEAKER)
101F			QYSLSF2050Z	SCREW
102			LY31945-001C	COVER(JACK)
103			LY31946-001A	COVER(JIG)
104			LY20683-005B	FRONT COVER ASSY,A
			LY20683-015A	FRONT COVER ASSY,B,C,D
104A			LY31937-001A	HOOD
104B			LY31938-001A	COVER(HOOD)
104C			LY31936-001A	RING
104D			QYSLSF2060D	SCREW,X4
104E			LY32040-001A	DC LIGHT
104F			LY30029-0B4A	SPACER(A)
104G			LY32043-001A	MICROPHONE
104H			YQ44341-6	CAUTION LABEL
104J			LY32058-002A	STICKER(A)
104K			LY32060-003A	STICKER(C)
105			LY20694-002B	CASS.COVER(M)ASSY,B,C,D
			LY20694-004B	CASS.COVER(M)ASSY,A
105A			LY42883-001A	MARK
105B			LY40559-001A	SHIELD SHEET
105C			LY40076-001A	SPACER,X2
106			LY10257-036A	UPPER CASE(M),B,C
			LY10257-037A	UPPER CASE(M),D
			LY10257-039A	UPPER CASE(M),A
109			LY20614-008B	TOP OPE UNIT,B,C,D
			LY20614-012B	TOP OPE UNIT,A
110			LY20613-001A	ZOOM UNIT
111			LY20615-005A	REAR UNIT
114			LY32061-004A	STICKER(D),B,C,D
			LY32061-005A	STICKER(D),A
115			QYSLSF2060D	SCREW,X4
116			QYSLSF2060D	SCREW,X3
117			QYSLSF2060D	SCREW,X3
118			QYSLSF2060D	SCREW,X2
119			QYSLSP2030D	SCREW
120			QYSLSF2060D	SCREW,X2
121			QYSLSF2050Z	SCREW,X3
122			QYSLSF2060D	SCREW
123			QYSLSF2060D	SCREW
124			QYSLSF2060D	SCREW,X4
125			QYSLSF2060D	SCREW,X2
126			QYSLSF2060D	SCREW
127			QYSLSP2030D	SCREW,X2
128			QYSLSP2030D	SCREW,X2
130			LY20678-001A	FRAME ASSY
130A			YQ31843	BASE
130B			QYSLSF2060D	SCREW,X2
130C			LY30029-0A4A	SPACER(A)
130D			LY41082-001A	CUSHION(OP),X2
130E			YQ43810-1-1	CONTACT(LIGHT),X2
130F			WJM0167-001A	E-SI C WIRE C-F,MAIN CN4
131			LY42758-001A	S.CASE(MAIN)

#	△	REF No.	PART No.	PART NAME, DESCRIPTION
132			QYSPSTU1725M	SCREW
133			LY41173-001A	SPECIAL SCREW,X2
134			QYSLSF1750D	SCREW
135			LY30018-050A	SPECIAL SCREW,X2
136			LY42981-001A	SPECIAL SCREW
137			WJT0039-001A	E-CARD WIRE,OP-MAIN CN15
138			QYSLSF2060D	SCREW
140			LY31790-001A	FRONT FRAME ASSY
140A			YQ44144-1-1	TAPE GUIDE
141			SPSH1725M	SCREW,X2
142			LY31807-001A	SIDE BRACKET L
143			LY42722-003A	SCREW
144			LY31806-001A	SIDE BRACKET R
145			LY42722-003A	SCREW
148			LY31816-001A	BRACKET(MECHA)
149			LY42722-003A	SCREW,X2
150			LY31808-001A	CASS.HOUSING ASSY
151			LY42722-003A	SCREW,X4
152			LY30176-001A	CASS.COV.INSIDE
153			LY31956-001A	BRACKET(C.COV)
154			LY20645-001A	HOLDER(DSC P),B,C,D
155			QYSLSF2060D	SCREW,B,C,D
156			LY42875-001A	FPC(DSC) ASSY,B,C,D
156A			LY42876-001A	S.SHEET(DSC FPC),B,C,D
157			YU40341	INSULATER,B,C,D
- OPTICAL BLOCK SECTION -				
251			LY30948-003A	OP BLOCK ASSY
251A			PTY30948-002	FOCUS MOTOR
251B			PTY30948-321	ZOOM MOTOR
251C			PTY30151-016	SCREW,X9
251D			PTY30948-006	IRIS MOTOR UNIT,INCL.FPC
252			QYSPSGU2080Z	SCREW,X2
253			LY31441-001A	SPACER RUBBER
254			LY41757-001A	OPTICAL LPF
255			LY20346-001A	CCD SPACER
256			LY30018-072A	SPECIAL SCREW
257			LYH40018-006A	CCD BASE ASSY

MODEL	MARK
GR-SXM335U	A
GR-SXM730U	B
GR-SXM730UC	C
GR-SXM735U	D

5.3 ELECTRICAL PARTS LIST

△ REF No. PART No. PART NAME, DESCRIPTION

MAIN BOARD ASSEMBLY <01>

PW	YB10310UY	MAIN BOARD ASSY,A
	YB10310UZ	MAIN BOARD ASSY,B,C
	YB10310VA	MAIN BOARD ASSY,D
IC101	UPD703039-029	IC(MICRO C ROM)
	or UPD70F3040-029	IC(MICRO C ROM)
IC102	TC7S86FU	IC(DIGITAL)
	or SN74AHC1G86K	IC
	or MC74VHC1G86DF	IC
IC104	AT25080N-10SC-X	IC
	or X25170S8I-2.5-X	IC
	or 25LC080-I/SN-X	IC
IC105	M62367GP	IC
IC106	IC-PST9327U-X	IC
IC107	RS5C314	IC
△ IC1601	BD6630KV	IC
IC1801	PIC-26043S	IR DETECT UNIT,B,C,D
IC2001	MC74AC04DT	IC
IC2401	NJM2149V-X	IC
IC3001	JCY0130	IC
IC3002	SN74AHC1G04K-X	IC
IC3501	HA118224F	IC
IC4001	JCY0149	IC
IC4002	TMS4C2973-28-X	IC
IC4003	UPD6467GR-506-X	IC(MICRO C ROM)
IC4004	MM1385NN-X	IC
IC4201	UPC358G2/5/-W	IC
IC4202	BA10324AF-XE	IC
IC4251	BA10358F-XE	IC
IC4501	UPD16835G3	IC
IC5201	HD49326BF	IC
IC5202	JCY0098	IC
IC6001	FA3698F	IC
IC7001	CXD3518R	IC,D
IC7002	MN5814	IC
IC7005	BA4558F	IC,D
IC7006	BA4558F	IC
IC7007	TC7S04FU	IC(DIGITAL),A,D
	or MC74VHC1G04DF	IC,A,D
	or SN74AHC1G04K	IC,A,D
IC7008	SN74LV4052APW	IC
Q101	2SA1774/RS/-X	TRANSISTOR
Q102	DTC144EE	TRANSISTOR
Q103	2SC4617/QR/-X	TRANSISTOR
Q104	DTC144EE	TRANSISTOR
Q105	2SA1774/RS/-X	TRANSISTOR
Q110	DTC144EE	TRANSISTOR
Q111	DTC114EE	TRANSISTOR
Q112	DTC114EE	TRANSISTOR
Q113	2SC4097/QR/-X	TRANSISTOR
Q2001	DTA114TE	TRANSISTOR
Q2007	PUMX1	PAIR TRANSISTOR
	or UMX1N	PAIR TRANSISTOR
	or HN1C01FU/G/-X	PAIR TRANSISTOR
Q2008	PUMT1	PAIR TRANSISTOR
	or HN1A01FU/G/-X	PAIR TRANSISTOR
Q2021	DTC144EE	TRANSISTOR
Q2022	DTC144EE	TRANSISTOR

△ REF No. PART No. PART NAME, DESCRIPTION

Q2023	2SC4617/QR/-X	TRANSISTOR
Q2071	2SC4617/QR/-X	TRANSISTOR
Q2401	DTC144EE	TRANSISTOR
Q3002	PUMX1	PAIR TRANSISTOR
	or UMX1N	PAIR TRANSISTOR
	or HN1C01FU/G/-X	PAIR TRANSISTOR
Q3003	2SC4097/QR/-X	TRANSISTOR
Q3006	DTC144EE	TRANSISTOR
Q3501	HN1C01FU/G/-X	PAIR TRANSISTOR
Q3502	HN1C01FU/G/-X	PAIR TRANSISTOR
Q3505	DTC144EE	TRANSISTOR
Q3901	HN1A01FU/G/-X	PAIR TRANSISTOR
Q4201	2SC4617/QR/-X	TRANSISTOR
Q4251	RPM-22PB	PHOTO TRANSISTOR
Q4501	DTC114EE	TRANSISTOR
Q4701	PUMX1	PAIR TRANSISTOR
	or UMX1N	PAIR TRANSISTOR
	or HN1C01FU/G/-X	PAIR TRANSISTOR
Q4702	2SC4617/QR/-X	TRANSISTOR
Q4703	PUMX1	PAIR TRANSISTOR
	or UMX1N	PAIR TRANSISTOR
	or HN1C01FU/G/-X	PAIR TRANSISTOR
Q4704	PUMT1	PAIR TRANSISTOR
	or HN1A01FU/G/-X	PAIR TRANSISTOR
Q4705	2SC4617/QR/-X	TRANSISTOR
Q4706	2SC4617/QR/-X	TRANSISTOR
Q4707	2SC4617/QR/-X	TRANSISTOR
Q4711	PUMX1	PAIR TRANSISTOR
	or HN1C01FU/G/-X	PAIR TRANSISTOR
	or UMX1N	PAIR TRANSISTOR
Q4712	PUMT1	PAIR TRANSISTOR
	or HN1A01FU/G/-X	PAIR TRANSISTOR
Q4713	PUMX1	PAIR TRANSISTOR
	or UMX1N	PAIR TRANSISTOR
	or HN1C01FU/G/-X	PAIR TRANSISTOR
Q4714	PUMT1	PAIR TRANSISTOR
	or HN1A01FU/G/-X	PAIR TRANSISTOR
Q4715	PUMX1	PAIR TRANSISTOR
	or HN1C01FU/G/-X	PAIR TRANSISTOR
	or UMX1N	PAIR TRANSISTOR
Q6101	SSM6J07FU	MOS FET
Q6201	SSM6J07FU	MOS FET
Q6301	CPH3304	MOS FET
Q6306	SSM3K02F	MOS FET
Q6307	2SC4617/QR/-X	TRANSISTOR
Q6308	CPH3101	TRANSISTOR
Q6401	SSM6J07FU	MOS FET
Q6501	SSM6J07FU	MOS FET
Q6601	CPH3305	MOS FET
Q6608	DTC144EE	TRANSISTOR
Q6621	HN1C01FU/G/-X	PAIR TRANSISTOR
Q6622	2SA1577/QR/-X	TRANSISTOR
Q6701	FX802	TRANSISTOR
Q6702	2SC4097/QR/-X	TRANSISTOR
Q6801	2SA1577/QR/-X	TRANSISTOR
Q6811	2SB1121/TU/-X	TRANSISTOR
Q7001	PUMX1	PAIR TRANSISTOR,D
Q7003	PUMX1	PAIR TRANSISTOR
Q7005	PUMX1	PAIR TRANSISTOR,D
Q7011	PUMX1	PAIR TRANSISTOR
Q7013	PUMX1	PAIR TRANSISTOR

#	△	REF No.	PART No.	PART NAME, DESCRIPTION		#	△	REF No.	PART No.	PART NAME, DESCRIPTION	
		Q7015	PUMX1	PAIR TRANSISTOR				R141	NRSA63J-334X	MG RESISTOR	330kΩ,1/16W
		Q7017	2SC4617/QR/-X	TRANSISTOR				R142	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W
		Q7018	2SA1774/QR/-X	TRANSISTOR				R143	NRSA63J-105X	MG RESISTOR	1MΩ,1/16W
		Q7019	2SC4617/QR/-X	TRANSISTOR				R144	NRSA63J-221X	MG RESISTOR	220Ω,1/16W
		Q7020	2SA1774/QR/-X	TRANSISTOR				R145	NRSA63J-222X	MG RESISTOR	2.2kΩ,1/16W
		Q7022	DTC144EE	TRANSISTOR,A,D				R146	NRSA63J-474X	MG RESISTOR	470kΩ,1/16W
△		D101	SB007W03Q	SB DIODE				R147	NRSA63J-472X	MG RESISTOR	4.7kΩ,1/16W
		D102	UDZS7.5B	ZENER DIODE				R148	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
		D105	1SS355	DIODE				R149	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W
		D106	1SS355	DIODE				R150	NRSA63J-222X	MG RESISTOR	2.2kΩ,1/16W
		D107	SB007W03Q	SB DIODE				R151	NRSA63J-222X	MG RESISTOR	2.2kΩ,1/16W
		D3001	DAN222	DIODE				R152	NRSA63J-474X	MG RESISTOR	470kΩ,1/16W
		D5201	1SS355	DIODE				R153	NRSA63J-474X	MG RESISTOR	470kΩ,1/16W
		D6001	CRS03	SB DIODE				R158	NRSA63J-474X	MG RESISTOR	470kΩ,1/16W
		D6101	CRS03	SB DIODE				R159	NRSA63J-474X	MG RESISTOR	470kΩ,1/16W
		D6106	1SS357	SB DIODE				R160	NRSA63J-474X	MG RESISTOR	470kΩ,1/16W
		D6201	CRS03	SB DIODE				R161	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W
		D6301	CRS03	SB DIODE				R162	NRSA63J-472X	MG RESISTOR	4.7kΩ,1/16W
		D6401	CRS03	SB DIODE				R163	NRSA63J-221X	MG RESISTOR	220Ω,1/16W
		D6501	CRS03	SB DIODE				R164	NRSA63J-472X	MG RESISTOR	4.7kΩ,1/16W
		D6601	1SS383	SB DIODE				R166	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W
		D6616	UDZS8.2B	ZENER DIODE				R167	NRSA63J-183X	MG RESISTOR	18kΩ,1/16W
		D7001	MA365	VARI CAP DIODE,D				R168	NRSA63J-562X	MG RESISTOR	5.6kΩ,1/16W
		D7002	MA365	VARI CAP DIODE				R170	NRSA63J-333X	MG RESISTOR	33kΩ,1/16W
		D7004	RB471E	SB DIODE				R171	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W
		R101	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W			R172	NRSA63J-151X	MG RESISTOR	150Ω,1/16W
△		R104	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W			R173	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
		R105	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W			R174	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
		R106	NRSA63J-561X	MG RESISTOR	560Ω,1/16W			R175	NRSA63J-105X	MG RESISTOR	1MΩ,1/16W
		R107	NRVA63D-153X	CMF RESISTOR	15kΩ,1/16W			R176	NRSA63J-221X	MG RESISTOR	220Ω,1/16W
		R108	NRVA63D-243X	CMF RESISTOR	24kΩ,1/16W			R180	NRSA63J-331X	MG RESISTOR	330Ω,1/16W
		R109	NRVA63D-183X	CMF RESISTOR	18kΩ,1/16W			R182	NRSA63J-222X	MG RESISTOR	2.2kΩ,1/16W
		R110	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W			R183	NRSA63J-222X	MG RESISTOR	2.2kΩ,1/16W
		R111	NRSA63J-273X	MG RESISTOR	27kΩ,1/16W			R184	NRSA63J-222X	MG RESISTOR	2.2kΩ,1/16W
		R112	NRSA63J-331X	MG RESISTOR	330Ω,1/16W			R188	NRSA63J-222X	MG RESISTOR	2.2kΩ,1/16W
		R113	NRSA63J-562X	MG RESISTOR	5.6kΩ,1/16W			R190	NRSA63J-331X	MG RESISTOR	330Ω,1/16W
		R114	NRSA63J-821X	MG RESISTOR	820Ω,1/16W			R191	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
		R115	NRSA63J-101X	MG RESISTOR	100Ω,1/16W			R192	NRSA63J-105X	MG RESISTOR	1MΩ,1/16W
		R116	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W			R195	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
		R118	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W			R1601	NRV142F-R33X	CMF RESISTOR	0.33Ω,1/4W
		R119	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W			R1602	NRV142F-R33X	CMF RESISTOR	0.33Ω,1/4W
		R120	NRSA63J-273X	MG RESISTOR	27kΩ,1/16W			R1603	NRSA63J-154X	MG RESISTOR	150kΩ,1/16W
		R121	NRSA63J-273X	MG RESISTOR	27kΩ,1/16W			R1604	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
		R122	NRSA63J-393X	MG RESISTOR	39kΩ,1/16W			R1605	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
		R123	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W			R1606	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
		R124	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W			R1607	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W
		R125	NRSA63J-273X	MG RESISTOR	27kΩ,1/16W			R1608	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W
		R126	NRSA63J-153X	MG RESISTOR	15kΩ,1/16W			R1609	NRSA63J-333X	MG RESISTOR	33kΩ,1/16W
		R127	NRSA63J-221X	MG RESISTOR	220Ω,1/16W			R1610	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W
		R128	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W			R1612	NRSA63J-392X	MG RESISTOR	3.9kΩ,1/16W
		R129	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W			R1613	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W
		R130	NRSA63J-105X	MG RESISTOR	1MΩ,1/16W			R1614	NRSA63J-333X	MG RESISTOR	33kΩ,1/16W
		R131	NRSA63J-105X	MG RESISTOR	1MΩ,1/16W			R1615	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W
		R132	NRSA63J-105X	MG RESISTOR	1MΩ,1/16W			R1617	NRSA63J-183X	MG RESISTOR	18kΩ,1/16W
		R133	NRSA63J-105X	MG RESISTOR	1MΩ,1/16W			R1618	NRSA63J-154X	MG RESISTOR	150kΩ,1/16W
		R134	NRSA63J-105X	MG RESISTOR	1MΩ,1/16W			R1619	NRSA63J-471X	MG RESISTOR	470Ω,1/16W
		R135	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W			R1620	NRSA63J-684X	MG RESISTOR	680kΩ,1/16W
		R136	NRSA63J-474X	MG RESISTOR	470kΩ,1/16W			R1621	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
		R138	NRSA63J-333X	MG RESISTOR	33kΩ,1/16W			R1622	NRSA63J-224X	MG RESISTOR	220kΩ,1/16W
		R139	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W			R1623	NRSA63J-223X	MG RESISTOR	22kΩ,1/16W
		R140	NRSA63J-753X	MG RESISTOR	75kΩ,1/16W			R1624	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W

#	△	REF No.	PART No.	PART NAME, DESCRIPTION	#	△	REF No.	PART No.	PART NAME, DESCRIPTION
R1625			NRSA63J-104X	MG RESISTOR 100kΩ, 1/16W	R3903			NRSA63J-182X	MG RESISTOR 1.8kΩ, 1/16W
R1626			NRSA63J-104X	MG RESISTOR 100kΩ, 1/16W	R4001			NRSA63J-113X	MG RESISTOR 11kΩ, 1/16W
R1628			NRSA63J-0R0X	MG RESISTOR 0Ω, 1/16W	R4002			NRSA63J-123X	MG RESISTOR 12kΩ, 1/16W
R1629			NRSA63J-0R0X	MG RESISTOR 0Ω, 1/16W	R4003			NRSA63J-153X	MG RESISTOR 15kΩ, 1/16W
R1630			NRSA63J-0R0X	MG RESISTOR 0Ω, 1/16W	R4004			NRSA63J-103X	MG RESISTOR 10kΩ, 1/16W
R1631			NRSA63J-122X	MG RESISTOR 1.2kΩ, 1/16W	R4006			NRVA63D-103X	CMF RESISTOR 10kΩ, 1/16W
R1632			NRSA63J-153X	MG RESISTOR 15kΩ, 1/16W	R4007			NRVA63D-432X	CMF RESISTOR 4.3kΩ, 1/16W
R1633			NRSA63J-683X	MG RESISTOR 68kΩ, 1/16W	R4008			NRVA63D-272X	CMF RESISTOR 2.7kΩ, 1/16W
R2001			NRSA63J-104X	MG RESISTOR 100kΩ, 1/16W	R4009			NRVA63D-152X	CMF RESISTOR 1.5kΩ, 1/16W
R2002			NRSA63J-332X	MG RESISTOR 3.3kΩ, 1/16W	R4010			NRVA63D-122X	CMF RESISTOR 1.2kΩ, 1/16W
R2003			NRSA63J-102X	MG RESISTOR 1kΩ, 1/16W	R4035			NRSA63J-0R0X	MG RESISTOR 0Ω, 1/16W
R2004			NRSA63J-681X	MG RESISTOR 680Ω, 1/16W	R4037			NRSA63J-102X	MG RESISTOR 1kΩ, 1/16W
R2005			NRSA63J-272X	MG RESISTOR 2.7kΩ, 1/16W	R4038			NRSA63J-101X	MG RESISTOR, B,C,D 100Ω, 1/16W
R2006			NRSA63J-102X	MG RESISTOR 1kΩ, 1/16W	R4201			NRSA63J-103X	MG RESISTOR 10kΩ, 1/16W
R2011			NRSA63J-101X	MG RESISTOR 100Ω, 1/16W	R4202			NRSA63J-563X	MG RESISTOR 56kΩ, 1/16W
R2012			NRSA63J-101X	MG RESISTOR 100Ω, 1/16W	R4203			NRSA63J-103X	MG RESISTOR 10kΩ, 1/16W
R2021			NRSA63J-103X	MG RESISTOR 10kΩ, 1/16W	R4204			NRSA63J-331X	MG RESISTOR 330Ω, 1/16W
R2022			NRSA63J-334X	MG RESISTOR 330kΩ, 1/16W	R4205			NRSA63J-105X	MG RESISTOR 1MΩ, 1/16W
R2023			NRSA63J-151X	MG RESISTOR 150Ω, 1/16W	R4206			NRSA63J-103X	MG RESISTOR 10kΩ, 1/16W
R2024			NRVA63D-133X	CMF RESISTOR 13kΩ, 1/16W	R4207			NRSA63J-104X	MG RESISTOR 100kΩ, 1/16W
R2025			NRSA63J-823X	MG RESISTOR 82kΩ, 1/16W	R4208			NRSA63J-472X	MG RESISTOR 4.7kΩ, 1/16W
R2026			NRSA63J-0R0X	MG RESISTOR 0Ω, 1/16W	R4209			NRSA63J-104X	MG RESISTOR 100kΩ, 1/16W
R2027			NRSA63J-102X	MG RESISTOR 1kΩ, 1/16W	R4210			NRSA63J-105X	MG RESISTOR 1MΩ, 1/16W
R2028			NRSA63J-102X	MG RESISTOR 1kΩ, 1/16W	R4211			NRSA63J-243X	MG RESISTOR 24kΩ, 1/16W
R2030			NRSA63J-104X	MG RESISTOR 100kΩ, 1/16W	R4214			NRSA63J-472X	MG RESISTOR 4.7kΩ, 1/16W
R2031			NRSA63J-332X	MG RESISTOR 3.3kΩ, 1/16W	R4215			NRSA63J-683X	MG RESISTOR 68kΩ, 1/16W
R2032			NRSA63J-270X	MG RESISTOR 27Ω, 1/16W	R4216			NRSA63J-103X	MG RESISTOR 10kΩ, 1/16W
R2051			NRSA63J-102X	MG RESISTOR 1kΩ, 1/16W	R4217			NRSA63J-102X	MG RESISTOR 1kΩ, 1/16W
R2071			NRSA63J-473X	MG RESISTOR 47kΩ, 1/16W	R4218			NRSA63J-102X	MG RESISTOR 1kΩ, 1/16W
R2072			NRSA63J-562X	MG RESISTOR 5.6kΩ, 1/16W	R4219			NRSA63J-104X	MG RESISTOR 100kΩ, 1/16W
R2401			NRSA63J-392X	MG RESISTOR 3.9kΩ, 1/16W	R4220			NRSA63J-152X	MG RESISTOR 1.5kΩ, 1/16W
R2402			NRSA63J-332X	MG RESISTOR 3.3kΩ, 1/16W	R4221			NRSA63J-334X	MG RESISTOR 330kΩ, 1/16W
R2403			NRSA63J-103X	MG RESISTOR 10kΩ, 1/16W	R4222			NRSA63J-154X	MG RESISTOR 150kΩ, 1/16W
R3001			NRSA63J-105X	MG RESISTOR 1MΩ, 1/16W	R4223			NRSA63J-333X	MG RESISTOR 33kΩ, 1/16W
R3002			NRVA63D-471X	CMF RESISTOR 470Ω, 1/16W	R4224			NRSA63J-223X	MG RESISTOR 22kΩ, 1/16W
R3004			NRVA63D-273X	CMF RESISTOR 27kΩ, 1/16W	R4251			NRSA63J-182X	MG RESISTOR 1.8kΩ, 1/16W
R3006			NRVA63D-561X	CMF RESISTOR 560Ω, 1/16W	R4252			NRSA63J-103X	MG RESISTOR 10kΩ, 1/16W
R3007			NRVA63D-153X	CMF RESISTOR 15kΩ, 1/16W	R4253			NRSA63J-103X	MG RESISTOR 10kΩ, 1/16W
R3008			NRSA63J-393X	MG RESISTOR 39kΩ, 1/16W	R4254			NRSA63J-684X	MG RESISTOR 680kΩ, 1/16W
R3009			NRSA63J-272X	MG RESISTOR 2.7kΩ, 1/16W	R4255			NRSA63J-222X	MG RESISTOR 2.2kΩ, 1/16W
R3010			NRSA63J-332X	MG RESISTOR 3.3kΩ, 1/16W	R4256			NRSA63J-824X	MG RESISTOR 820kΩ, 1/16W
R3014			NRSA63J-681X	MG RESISTOR 680Ω, 1/16W	R4257			NRSA63J-822X	MG RESISTOR 8.2kΩ, 1/16W
R3015			NRSA63J-332X	MG RESISTOR 3.3kΩ, 1/16W	R4258			NRSA63J-104X	MG RESISTOR 100kΩ, 1/16W
R3016			NRSA63J-332X	MG RESISTOR 3.3kΩ, 1/16W	R4259			NRSA63J-683X	MG RESISTOR 68kΩ, 1/16W
R3018			NRSA63J-271X	MG RESISTOR 270Ω, 1/16W	R4262			NRSA63J-302X	MG RESISTOR 3kΩ, 1/16W
R3023			NRSA63J-331X	MG RESISTOR 330Ω, 1/16W	△ R4501			NRSA63J-6R8X	MG RESISTOR 6.8Ω, 1/16W
R3027			NRSA63J-103X	MG RESISTOR 10kΩ, 1/16W	△ R4502			NRSA63J-6R8X	MG RESISTOR 6.8Ω, 1/16W
R3028			NRVA63D-472X	CMF RESISTOR 4.7kΩ, 1/16W	△ R4503			NRSA63J-6R8X	MG RESISTOR 6.8Ω, 1/16W
R3029			NRSA63J-0R0X	MG RESISTOR 0Ω, 1/16W	△ R4504			NRSA63J-6R8X	MG RESISTOR 6.8Ω, 1/16W
R3030			NRSA63J-561X	MG RESISTOR 560Ω, 1/16W	R4505			NRSA63J-271X	MG RESISTOR 270Ω, 1/16W
R3034			NRSA63J-220X	MG RESISTOR 22Ω, 1/16W	R4507			NRSA63J-103X	MG RESISTOR 10kΩ, 1/16W
R3038			NRSA63J-392X	MG RESISTOR 3.9kΩ, 1/16W	R4508			NRSA63J-103X	MG RESISTOR 10kΩ, 1/16W
R3501			NRSA63J-0R0X	MG RESISTOR 0Ω, 1/16W	R4514			NRSA63J-223X	MG RESISTOR 22kΩ, 1/16W
R3502			NRSA63J-102X	MG RESISTOR 1kΩ, 1/16W	R4515			NRSA63J-182X	MG RESISTOR 1.8kΩ, 1/16W
R3504			NRSA63J-102X	MG RESISTOR 1kΩ, 1/16W	R4702			NRSA63J-820X	MG RESISTOR 82Ω, 1/16W
R3505			NRSA63J-102X	MG RESISTOR 1kΩ, 1/16W	R4703			NRVA63D-561X	CMF RESISTOR 560Ω, 1/16W
R3506			NRSA63J-102X	MG RESISTOR 1kΩ, 1/16W	R4704			NRVA63D-272X	CMF RESISTOR 2.7kΩ, 1/16W
R3507			NRSA63J-0R0X	MG RESISTOR 0Ω, 1/16W	R4705			NRVA63D-562X	CMF RESISTOR 5.6kΩ, 1/16W
R3508			NRSA63J-153X	MG RESISTOR 15kΩ, 1/16W	R4706			NRSA63J-681X	MG RESISTOR 680Ω, 1/16W
R3901			NRSA63J-100X	MG RESISTOR 10Ω, 1/16W	R4707			NRSA63J-122X	MG RESISTOR 1.2kΩ, 1/16W
R3902			NRSA63J-101X	MG RESISTOR 100Ω, 1/16W	R4708			NRSA63J-104X	MG RESISTOR 100kΩ, 1/16W

#	△	REF No.	PART No.	PART NAME, DESCRIPTION	#	△	REF No.	PART No.	PART NAME, DESCRIPTION
R4709			NRSA63J-332X	MG RESISTOR 3.3kΩ,1/16W	R6307			NRSA63J-104X	MG RESISTOR 100kΩ,1/16W
R4710			NRSA63J-332X	MG RESISTOR 3.3kΩ,1/16W	R6309			NRSA63J-103X	MG RESISTOR 10kΩ,1/16W
R4711			NRSA63J-121X	MG RESISTOR 120Ω,1/16W	R6310			NRSA63J-152X	MG RESISTOR 1.5kΩ,1/16W
R4712			NRVA63D-561X	CMF RESISTOR 560Ω,1/16W	R6311			NRSA63J-473X	MG RESISTOR 47kΩ,1/16W
R4713			NRSA63J-681X	MG RESISTOR 680Ω,1/16W	R6403			NRSA63J-473X	MG RESISTOR 47kΩ,1/16W
R4714			NRSA63J-122X	MG RESISTOR 1.2kΩ,1/16W	R6404			NRSA63J-302X	MG RESISTOR 3kΩ,1/16W
R4715			NRSA63J-0R0X	MG RESISTOR 0Ω,1/16W	R6406			NRSA63J-183X	MG RESISTOR 18kΩ,1/16W
R4716			NRVA63D-511X	CMF RESISTOR 510Ω,1/16W	R6407			NRSA63J-823X	MG RESISTOR 82kΩ,1/16W
R4717			NRVA63D-222X	CMF RESISTOR 2.2kΩ,1/16W	R6503			NRSA63J-243X	MG RESISTOR 24kΩ,1/16W
R4718			NRSA63J-104X	MG RESISTOR 100kΩ,1/16W	R6504			NRSA63J-332X	MG RESISTOR 3.3kΩ,1/16W
R4719			NRSA63J-222X	MG RESISTOR 2.2kΩ,1/16W	R6506			NRSA63J-223X	MG RESISTOR 22kΩ,1/16W
R4721			NRVA63D-680X	CMF RESISTOR 68Ω,1/16W	R6507			NRSA63J-823X	MG RESISTOR 82kΩ,1/16W
R4722			NRVA63D-680X	CMF RESISTOR 68Ω,1/16W	R6603			NRVA63D-683X	CMF RESISTOR 68kΩ,1/16W
R4723			NRVA63D-680X	CMF RESISTOR 68Ω,1/16W	R6604			NRVA63D-392X	CMF RESISTOR 3.9kΩ,1/16W
R4735			NRSA63J-332X	MG RESISTOR 3.3kΩ,1/16W	R6605			NRSA63J-274X	MG RESISTOR 270kΩ,1/16W
R4736			NRSA63J-332X	MG RESISTOR 3.3kΩ,1/16W	R6606			NRSA63J-272X	MG RESISTOR 2.7kΩ,1/16W
R4737			NRSA63J-104X	MG RESISTOR 100kΩ,1/16W	R6612			NRSA63J-823X	MG RESISTOR 82kΩ,1/16W
R4738			NRSA63J-332X	MG RESISTOR 3.3kΩ,1/16W	R6613			NRSA63J-104X	MG RESISTOR 100kΩ,1/16W
R4739			NRSA63J-332X	MG RESISTOR 3.3kΩ,1/16W	R6614			NRSA63J-472X	MG RESISTOR 4.7kΩ,1/16W
R4741			NRVA63D-152X	CMF RESISTOR 1.5kΩ,1/16W	R6616			NRSA63J-102X	MG RESISTOR 1kΩ,1/16W
R4743			NRVA63D-223X	CMF RESISTOR 22kΩ,1/16W	R6622			NRVA63D-104X	CMF RESISTOR 100kΩ,1/16W
R4744			NRVA63D-222X	CMF RESISTOR 2.2kΩ,1/16W	R6623			NRVA63D-473X	CMF RESISTOR 47kΩ,1/16W
R4745			NRVA63D-681X	CMF RESISTOR 680Ω,1/16W	R6624			NRSA63J-273X	MG RESISTOR 27kΩ,1/16W
R4746			NRVA63D-222X	CMF RESISTOR 2.2kΩ,1/16W	R6625			NRSA63J-822X	MG RESISTOR 8.2kΩ,1/16W
R4747			NRVA63D-681X	CMF RESISTOR 680Ω,1/16W	R6626			NRVA63D-563X	CMF RESISTOR 56kΩ,1/16W
R5201			NRSA63J-243X	MG RESISTOR 24kΩ,1/16W	R6627			NRVA63D-363X	CMF RESISTOR 36kΩ,1/16W
R5202			NRSA63J-220X	MG RESISTOR 22Ω,1/16W	R6701			NRSA63J-680X	MG RESISTOR 68Ω,1/16W
R5204			NRSA63J-0R0X	MG RESISTOR 0Ω,1/16W	R6702			NRSA63J-221X	MG RESISTOR 220Ω,1/16W
R5212			NRSA63J-101X	MG RESISTOR 100Ω,1/16W	R6704			NRVA63D-472X	CMF RESISTOR 4.7kΩ,1/16W
R5213			NRSA63J-101X	MG RESISTOR 100Ω,1/16W	R6706			NRZ0058-R20X	MG RESISTOR 0.2Ω,1/2W
R5214			NRSA63J-101X	MG RESISTOR 100Ω,1/16W	R6707			NRS016J-121X	MG RESISTOR 120Ω,1W
R5215			NRSA63J-104X	MG RESISTOR 100kΩ,1/16W	R6708			NRS016J-121X	MG RESISTOR 120Ω,1W
R5216			NRSA63J-100X	MG RESISTOR 10Ω,1/16W	R6709			NRS016J-121X	MG RESISTOR 120Ω,1W
R5217			NRSA63J-104X	MG RESISTOR 100kΩ,1/16W	R6710			NRVA63D-823X	CMF RESISTOR 82kΩ,1/16W
R5218			NRSA63J-0R0X	MG RESISTOR 0Ω,1/16W	R6711			NRVA63D-333X	CMF RESISTOR 33kΩ,1/16W
R5220			NRSA63J-0R0X	MG RESISTOR 0Ω,1/16W	R6712			NRSA63J-222X	MG RESISTOR 2.2kΩ,1/16W
R6001			NRSA63J-104X	MG RESISTOR 100kΩ,1/16W	R6713			NRSA63J-562X	MG RESISTOR 5.6kΩ,1/16W
R6002			NRSA63J-333X	MG RESISTOR 33kΩ,1/16W	R6801			NRSA63J-102X	MG RESISTOR 1kΩ,1/16W
R6003			NRVA63D-912X	CMF RESISTOR 9.1kΩ,1/16W	R6803			NRVA63D-223X	CMF RESISTOR 22kΩ,1/16W
R6004			NRVA63D-471X	CMF RESISTOR 470Ω,1/16W	R6804			NRVA63D-103X	CMF RESISTOR 10kΩ,1/16W
R6005			NRVA63D-183X	CMF RESISTOR 18kΩ,1/16W	R6810			NRSA63J-0R0X	MG RESISTOR 0Ω,1/16W
R6006			NRSA63J-472X	MG RESISTOR 4.7kΩ,1/16W	R6811			NRSA63J-102X	MG RESISTOR 1kΩ,1/16W
R6008			NRVA63D-183X	CMF RESISTOR 18kΩ,1/16W	R6813			NRVA63D-104X	CMF RESISTOR 100kΩ,1/16W
R6009			NRSA63J-224X	MG RESISTOR 220kΩ,1/16W	R6814			NRVA63D-683X	CMF RESISTOR 68kΩ,1/16W
R6010			NRSA63J-473X	MG RESISTOR 47kΩ,1/16W	R6820			NRSA63J-102X	MG RESISTOR 1kΩ,1/16W
R6011			NRSA63J-473X	MG RESISTOR 47kΩ,1/16W	R6961			NRSA63J-223X	MG RESISTOR 22kΩ,1/16W
R6012			NRSA63J-103X	MG RESISTOR 10kΩ,1/16W	R7002			NRSA63J-102X	MG RESISTOR,D 1kΩ,1/16W
R6015			NRSA63J-104X	MG RESISTOR 100kΩ,1/16W	R7003			NRSA63J-103X	MG RESISTOR,D 10kΩ,1/16W
R6016			NRSA63J-104X	MG RESISTOR 100kΩ,1/16W	R7004			NRSA63J-333X	MG RESISTOR,D 33kΩ,1/16W
R6019			NRSA63J-222X	MG RESISTOR 2.2kΩ,1/16W	R7005			NRSA63J-103X	MG RESISTOR,D 10kΩ,1/16W
R6020			NRSA63J-224X	MG RESISTOR 220kΩ,1/16W	R7007			NRVA63D-473X	CMF RESISTOR,D 47kΩ,1/16W
R6021			NRSA63J-102X	MG RESISTOR 1kΩ,1/16W	R7008			NRVA63D-913X	CMF RESISTOR,D 91kΩ,1/16W
R6022			NRSA63J-102X	MG RESISTOR 1kΩ,1/16W	R7009			NRSA63J-0R0X	MG RESISTOR,D 0Ω,1/16W
R6023			NRSA63J-102X	MG RESISTOR 1kΩ,1/16W	R7021			NRSA63J-0R0X	MG RESISTOR 0Ω,1/16W
R6103			NRVA63D-223X	CMF RESISTOR 22kΩ,1/16W	R7029			NRSA63J-0R0X	MG RESISTOR 0Ω,1/16W
R6104			NRVA63D-103X	CMF RESISTOR 10kΩ,1/16W	R7031			NRSA63J-474X	MG RESISTOR 470kΩ,1/16W
R6203			NRVA63D-103X	CMF RESISTOR 10kΩ,1/16W	R7032			NRSA63J-223X	MG RESISTOR 22kΩ,1/16W
R6204			NRVA63D-103X	CMF RESISTOR 10kΩ,1/16W	R7033			NRSA63J-104X	MG RESISTOR 100kΩ,1/16W
R6303			NRVA63D-183X	CMF RESISTOR 18kΩ,1/16W	R7035			NRSA63J-103X	MG RESISTOR 10kΩ,1/16W
R6304			NRVA63D-472X	CMF RESISTOR 4.7kΩ,1/16W	R7040			NRVA63D-333X	CMF RESISTOR 33kΩ,1/16W
R6306			NRS12BK-R47W	MG RESISTOR 0.47Ω,1/2W	R7042			NRVA63D-123X	CMF RESISTOR 12kΩ,1/16W

# ▲ REF No.	PART No.	PART NAME, DESCRIPTION	# ▲ REF No.	PART No.	PART NAME, DESCRIPTION
R7043	NRVA63D-123X	CMF RESISTOR 12kΩ, 1/16W	RA103	NRZ0038-222X	NET RESISTOR
R7044	NRVA63D-432X	CMF RESISTOR,B,C 4.3kΩ, 1/16W	RA104	NRZ0038-222X	NET RESISTOR
	NRVA63D-752X	CMF RESISTOR,A,D 7.5kΩ, 1/16W	RA105	NRZ0038-473X	NET RESISTOR
R7045	NRVA63D-103X	CMF RESISTOR 10kΩ, 1/16W	RA106	NRZ0037-331X	NET RESISTOR
R7046	NRSA63J-103X	MG RESISTOR,A,D 10kΩ, 1/16W	RA107	NRZ0034-102W	NET RESISTOR
R7049	NRSA63J-680X	MG RESISTOR 68Ω, 1/16W	RA108	NRZ0034-102W	NET RESISTOR
R7050	NRSA63J-680X	MG RESISTOR 68Ω, 1/16W	RA109	NRZ0038-474X	NET RESISTOR
R7051	NRSA63J-680X	MG RESISTOR 68Ω, 1/16W	RA4001	NRZ0034-100W	NET RESISTOR,B,C,D
R7058	NRSA63J-0R0X	MG RESISTOR 0Ω, 1/16W	RA4002	NRZ0034-100W	NET RESISTOR,B,C,D
R7061	NRVA63D-183X	CMF RESISTOR,D 18kΩ, 1/16W	RA4003	NRZ0034-100W	NET RESISTOR,B,C,D
R7062	NRVA63D-334X	CMF RESISTOR,D 330kΩ, 1/16W	C102	NCF31EZ-104X	CAPACITOR 0.1μF,25V
R7067	NRSA63J-223X	MG RESISTOR,A,D 22kΩ, 1/16W	C103	NBE41AM-106X	T CAPACITOR 10μF,10V
	NRSA63J-682X	MG RESISTOR,B,C 6.8kΩ, 1/16W	C104	NCB31EK-103X	CAPACITOR 0.01μF,25V
R7068	NRSA63J-223X	MG RESISTOR 22kΩ, 1/16W	C105	NCB21CK-224X	CAPACITOR 0.22μF,16V
R7069	NRSA63J-223X	MG RESISTOR 22kΩ, 1/16W	C106	NCF31EZ-104X	CAPACITOR 0.1μF,25V
R7070	NRSA63J-223X	MG RESISTOR 22kΩ, 1/16W	C107	NCB31EK-103X	CAPACITOR 0.01μF,25V
R7071	NRSA63J-223X	MG RESISTOR 22kΩ, 1/16W	C108	NBE21AM-225X	T CAPACITOR 2.2μF,10V
R7072	NRSA02J-122X	MG RESISTOR,B,C 1.2kΩ, 1/10W	C109	NBE41AM-106X	T CAPACITOR 10μF,10V
	NRSA02J-182X	MG RESISTOR,A,D 1.8kΩ, 1/10W	C110	NDC31HJ-101X	CAPACITOR 100pF,50V
R7073	NRSA02J-331X	MG RESISTOR,A,D 330Ω, 1/10W	C111	NEA70JM-226X	E CAPACITOR 22μF,6.3V
	NRSA02J-821X	MG RESISTOR,B,C 820Ω, 1/10W	C112	NEA70JM-226X	E CAPACITOR 22μF,6.3V
R7074	NRSA63J-103X	MG RESISTOR 10kΩ, 1/16W	C113	NCB31EK-103X	CAPACITOR 0.01μF,25V
R7077	NRVA63D-682X	CMF RESISTOR 6.8kΩ, 1/16W	C114	NCB31EK-103X	CAPACITOR 0.01μF,25V
R7078	NRVA63D-822X	CMF RESISTOR,D 8.2kΩ, 1/16W	C115	NCF31EZ-104X	CAPACITOR 0.1μF,25V
R7079	NRSA63J-0R0X	MG RESISTOR,D 0Ω, 1/16W	C116	NCB31EK-103X	CAPACITOR 0.01μF,25V
R7083	NRSA63J-105X	MG RESISTOR 1MΩ, 1/16W	C118	NCF31EZ-104X	CAPACITOR 0.1μF,25V
R7085	NRVA63D-822X	CMF RESISTOR,D 8.2kΩ, 1/16W	C119	NCB31EK-103X	CAPACITOR 0.01μF,25V
R7086	NRVA63D-123X	CMF RESISTOR 12kΩ, 1/16W	C120	NCB31EK-103X	CAPACITOR 0.01μF,25V
R7088	NRVA63D-223X	CMF RESISTOR,D 22kΩ, 1/16W	C121	NCF31EZ-104X	CAPACITOR 0.1μF,25V
R7090	NRVA63D-822X	CMF RESISTOR,D 8.2kΩ, 1/16W	C122	NCF31EZ-104X	CAPACITOR 0.1μF,25V
R7091	NRVA63D-123X	CMF RESISTOR 12kΩ, 1/16W	C123	NDC31HJ-100X	CAPACITOR 10pF,50V
R7093	NRVA63D-223X	CMF RESISTOR 22kΩ, 1/16W	C124	NDC31HJ-100X	CAPACITOR 10pF,50V
R7095	NRVA63D-822X	CMF RESISTOR,D 8.2kΩ, 1/16W	C125	NCB31EK-103X	CAPACITOR 0.01μF,25V
R7096	NRVA63D-123X	CMF RESISTOR 12kΩ, 1/16W	C126	NDC31HJ-120X	CAPACITOR 12pF,50V
R7098	NRVA63D-223X	CMF RESISTOR,D 22kΩ, 1/16W	C127	NCB31CK-333X	CAPACITOR 0.033μF,16V
R7099	NRVA63D-103X	CMF RESISTOR,D 10kΩ, 1/16W	C128	NCB21CK-474X	CAPACITOR 0.47μF,16V
R7100	NRVA63D-103X	CMF RESISTOR,D 10kΩ, 1/16W	C129	NCB31CK-333X	CAPACITOR 0.033μF,16V
R7101	NRVA63D-103X	CMF RESISTOR,D 10kΩ, 1/16W	C131	NCF31EZ-104X	CAPACITOR 0.1μF,25V
R7102	NRVA63D-103X	CMF RESISTOR,D 10kΩ, 1/16W	C132	NCF31EZ-104X	CAPACITOR 0.1μF,25V
R7103	NRVA63D-103X	CMF RESISTOR,D 10kΩ, 1/16W	C133	NCF31EZ-104X	CAPACITOR 0.1μF,25V
R7110	NRSA63J-105X	MG RESISTOR 1MΩ, 1/16W	C134	NCF31EZ-104X	CAPACITOR 0.1μF,25V
R7112	NRVA63D-332X	CMF RESISTOR 3.3kΩ, 1/16W	C1201	NCB31HK-102X	CAPACITOR 0.001μF,50V
R7114	NRVA63D-223X	CMF RESISTOR 22kΩ, 1/16W	C1202	NBE20JM-106X	T CAPACITOR 10μF,6.3V
R7116	NRVA63D-332X	CMF RESISTOR 3.3kΩ, 1/16W	C1205	NCB31EK-153X	CAPACITOR 0.015μF,25V
R7118	NRVA63D-223X	CMF RESISTOR 22kΩ, 1/16W	C1206	NBE20JM-106X	T CAPACITOR 10μF,6.3V
R7120	NRVA63D-332X	CMF RESISTOR 3.3kΩ, 1/16W	C1601	NCB31EK-103X	CAPACITOR 0.01μF,25V
R7122	NRVA63D-223X	CMF RESISTOR 22kΩ, 1/16W	C1602	NCB21CK-224X	CAPACITOR 0.22μF,16V
R7124	NRVA63D-103X	CMF RESISTOR 10kΩ, 1/16W	C1603	NCB31CK-223X	CAPACITOR 0.022μF,16V
R7127	NRVA63D-103X	CMF RESISTOR 10kΩ, 1/16W	C1604	NCB31CK-223X	CAPACITOR 0.022μF,16V
R7128	NRVA63D-103X	CMF RESISTOR 10kΩ, 1/16W	C1605	NCB31CK-223X	CAPACITOR 0.022μF,16V
R7129	NRVA63D-103X	CMF RESISTOR 10kΩ, 1/16W	C1606	NCB31CK-104X	CAPACITOR 0.1μF,16V
R7130	NRVA63D-103X	CMF RESISTOR 10kΩ, 1/16W	C1607	NCB31CK-104X	CAPACITOR 0.1μF,16V
R7131	NRVA63D-103X	CMF RESISTOR 10kΩ, 1/16W	C1608	NCB31CK-683X	CAPACITOR 0.068μF,16V
R7132	NRVA63D-103X	CMF RESISTOR 10kΩ, 1/16W	C1609	NCB31CK-104X	CAPACITOR 0.1μF,16V
R7139	NRVA63D-911X	CMF RESISTOR,A,B,C 910Ω, 1/16W	C1610	NCB31CK-104X	CAPACITOR 0.1μF,16V
R7142	NRSA63J-0R0X	MG RESISTOR,B,C 0Ω, 1/16W	C1611	NCB31CK-104X	CAPACITOR 0.1μF,16V
R7143	NRSA63J-0R0X	MG RESISTOR,A,D 0Ω, 1/16W	C1612	NDC31HJ-331X	CAPACITOR 330pF,50V
R7212	NRSA63J-0R0X	MG RESISTOR 0Ω, 1/16W	C1613	NCB21CK-334X	CAPACITOR 0.33μF,16V
R7213	NRSA63J-0R0X	MG RESISTOR 0Ω, 1/16W	C1614	NBE41AM-226X	T CAPACITOR 22μF,10V
RA101	NRZ0038-222X	NET RESISTOR	C1615	NCB31HK-681X	CAPACITOR 680pF,50V
RA102	NRZ0038-222X	NET RESISTOR	C1616	NCB21CK-474X	CAPACITOR 0.47μF,16V

#	△	REF No.	PART No.	PART NAME, DESCRIPTION		#	△	REF No.	PART No.	PART NAME, DESCRIPTION	
C1617			NCB31HK-152X	CAPACITOR	0.0015μF,50V	C3903			NDC31HJ-3R0X	CAPACITOR	3pF,50V
C1618			NBE21AM-106X	T CAPACITOR	10μF,10V	C4006			NCF31EZ-104X	CAPACITOR	0.1μF,25V
C1619			NCB31CK-223X	CAPACITOR	0.022μF,16V	C4008			NCF31EZ-104X	CAPACITOR	0.1μF,25V
C1621			NBP41CM-106X	T CAPACITOR	10μF,16V	C4009			NCF31EZ-104X	CAPACITOR	0.1μF,25V
C2001			NBE20JM-106X	T CAPACITOR	10μF,6.3V	C4010			NCF31EZ-104X	CAPACITOR	0.1μF,25V
C2002			NFV41HJ-183X	MPPS CAPACITOR	0.018μF,50V	C4012			NCF31EZ-104X	CAPACITOR	0.1μF,25V
C2003			NDC31HJ-331X	CAPACITOR	330pF,50V	C4014			NCF31EZ-104X	CAPACITOR	0.1μF,25V
C2004			NBE20JM-226X	T CAPACITOR	22μF,6.3V	C4017			NCF31EZ-104X	CAPACITOR	0.1μF,25V
C2005			NCB21CK-105X	CAPACITOR	1μF,16V	C4019			NCF31EZ-104X	CAPACITOR	0.1μF,25V
C2021			NCB31EK-682X	CAPACITOR	0.0068μF,25V	C4022			NCF31EZ-104X	CAPACITOR	0.1μF,25V
C2022			NBE20JM-106X	T CAPACITOR	10μF,6.3V	C4024			NCF31EZ-104X	CAPACITOR	0.1μF,25V
C2023			NBP21CM-105X	T CAPACITOR	1μF,16V	C4028			NCF31EZ-104X	CAPACITOR	0.1μF,25V
C2024			NCB31HK-122X	CAPACITOR	0.0012μF,50V	C4029			NCF31EZ-104X	CAPACITOR	0.1μF,25V
C2025			NCB30JK-105X	CAPACITOR	1μF,6.3V	C4030			NCF31EZ-104X	CAPACITOR	0.1μF,25V
C2026			NCB31HK-222X	CAPACITOR	0.0022μF,50V	C4036			NCF31EZ-104X	CAPACITOR	0.1μF,25V
C2027			NCB30JK-474X	CAPACITOR	0.47μF,6.3V	C4040			NCB21CK-105X	CAPACITOR	1μF,16V
C2028			NCB30JK-105X	CAPACITOR	1μF,6.3V	C4044			NCB21CK-105X	CAPACITOR	1μF,16V
C2029			NCB30JK-105X	CAPACITOR	1μF,6.3V	C4048			NCB10JK-106X	CAPACITOR	10μF,6.3V
C2031			NCB31CK-104X	CAPACITOR	0.1μF,16V	C4049			NDC31HJ-100X	CAPACITOR	10pF,50V
C2032			NCB31HK-472X	CAPACITOR	0.0047μF,50V	C4051			NDC31HJ-221X	CAPACITOR	220pF,50V
C2033			NBE20JM-475X	T CAPACITOR	4.7μF,6.3V	C4052			NCB21CK-105X	CAPACITOR	1μF,16V
C2034			NCB31CK-104X	CAPACITOR	0.1μF,16V	C4053			NCF31EZ-104X	CAPACITOR	0.1μF,25V
C2035			NBE20JM-226X	T CAPACITOR	22μF,6.3V	C4201			NEA71HM-225X	E CAPACITOR	2.2μF,50V
C2036			NBE20JM-106X	T CAPACITOR	10μF,6.3V	C4202			NCF31EZ-104X	CAPACITOR	0.1μF,25V
C2037			NBE20JM-226X	T CAPACITOR	22μF,6.3V	C4203			NCB31CK-104X	CAPACITOR	0.1μF,16V
C2038			NCB30JK-474X	CAPACITOR	0.47μF,6.3V	C4205			NCB31EK-103X	CAPACITOR	0.01μF,25V
C2051			NCB31EK-103X	CAPACITOR	0.01μF,25V	C4206			NCB31CK-104X	CAPACITOR	0.1μF,16V
C2071			NBE20JM-106X	T CAPACITOR	10μF,6.3V	C4207			NCB31EK-103X	CAPACITOR	0.01μF,25V
C2072			NCB31HK-222X	CAPACITOR	0.0022μF,50V	C4208			NCB31CK-104X	CAPACITOR	0.1μF,16V
C2401			NEA70GM-476X	E CAPACITOR	47μF,4.0V	C4209			NCF21CZ-105X	CAPACITOR	1μF,16V
C2402			NCB30JK-105X	CAPACITOR	1μF,6.3V	C4210			NCF21CZ-105X	CAPACITOR	1μF,16V
C2403			NBE20JM-475X	T CAPACITOR	4.7μF,6.3V	C4251			NEA71HM-335X	E CAPACITOR	3.3μF,50V
C2404			NCF31EZ-104X	CAPACITOR	0.1μF,25V	C4252			NCB31CK-104X	CAPACITOR	0.1μF,16V
C3002			NCB21CK-105X	CAPACITOR	1μF,16V	C4253			NCB31EK-153X	CAPACITOR	0.015μF,25V
C3003			NCB21CK-105X	CAPACITOR	1μF,16V	C4254			NCB31EK-153X	CAPACITOR	0.015μF,25V
C3004			NCF31EZ-104X	CAPACITOR	0.1μF,25V	C4256			NEA71CM-106X	E CAPACITOR	10μF,16V
C3005			NCF31EZ-104X	CAPACITOR	0.1μF,25V	C4502			NBE21AM-106X	T CAPACITOR	10μF,10V
C3006			NDC31HG-100X	CAPACITOR	10pF,50V	C4504			NCF31EZ-104X	CAPACITOR	0.1μF,25V
C3007			NDC31HG-100X	CAPACITOR	10pF,50V	C4505			NDC31HJ-330X	CAPACITOR	33pF,50V
C3009			NCF31EZ-104X	CAPACITOR	0.1μF,25V	C4506			NCB31HK-102X	CAPACITOR	0.001μF,50V
C3011			NCF31EZ-104X	CAPACITOR	0.1μF,25V	C4507			NCB31HK-102X	CAPACITOR	0.001μF,50V
C3012			NCF31EZ-104X	CAPACITOR	0.1μF,25V	C4508			NCB31HK-102X	CAPACITOR	0.001μF,50V
C3013			NCF31EZ-104X	CAPACITOR	0.1μF,25V	C4509			NCB31HK-102X	CAPACITOR	0.001μF,50V
C3014			NCF31EZ-104X	CAPACITOR	0.1μF,25V	C4510			NCB31CK-104X	CAPACITOR	0.1μF,16V
C3015			NCF31EZ-104X	CAPACITOR	0.1μF,25V	C4511			NCF31EZ-104X	CAPACITOR	0.1μF,25V
C3017			NCF31EZ-104X	CAPACITOR	0.1μF,25V	C4701			NBE20JM-106X	T CAPACITOR	10μF,6.3V
C3019			NCB31EK-103X	CAPACITOR	0.01μF,25V	C4702			NCF31EZ-104X	CAPACITOR	0.1μF,25V
C3020			NCB31EK-103X	CAPACITOR	0.01μF,25V	C4703			NBE20JM-106X	T CAPACITOR	10μF,6.3V
C3027			NCB31EK-103X	CAPACITOR	0.01μF,25V	C4704			NCB21CK-105X	CAPACITOR	1μF,16V
C3028			NCB31EK-103X	CAPACITOR	0.01μF,25V	C4705			NDC31HJ-820X	CAPACITOR	82pF,50V
C3033			NCB31CK-104X	CAPACITOR	0.1μF,16V	C4706			NDC31HJ-150X	CAPACITOR	15pF,50V
C3037			NDC31HJ-100X	CAPACITOR	10pF,50V	C4707			NCB21CK-105X	CAPACITOR	1μF,16V
C3506			NCB31EK-103X	CAPACITOR	0.01μF,25V	C4708			NDC31HJ-820X	CAPACITOR	82pF,50V
C3507			NCB31EK-103X	CAPACITOR	0.01μF,25V	C4709			NDC31HJ-150X	CAPACITOR	15pF,50V
C3508			NCB31EK-103X	CAPACITOR	0.01μF,25V	C4710			NCB31EK-103X	CAPACITOR	0.01μF,25V
C3510			NCB31CK-104X	CAPACITOR	0.1μF,16V	C4711			NCB21CK-105X	CAPACITOR	1μF,16V
C3512			NCB10JK-106X	CAPACITOR	10μF,6.3V	C4715			NCB21CK-105X	CAPACITOR	1μF,16V
C3513			NCB31CK-223X	CAPACITOR	0.022μF,16V	C4719			NCB31EK-103X	CAPACITOR	0.01μF,25V
C3514			NCB21CK-105X	CAPACITOR	1μF,16V	C5203			NCB10JK-106X	CAPACITOR	10μF,6.3V
C3515			NCB31EK-103X	CAPACITOR	0.01μF,25V	C5207			NCB31EK-103X	CAPACITOR	0.01μF,25V
C3902			NCB31EK-103X	CAPACITOR	0.01μF,25V	C5208			NCB31EK-103X	CAPACITOR	0.01μF,25V

# ▲ REF No.	PART No.	PART NAME, DESCRIPTION		# ▲ REF No.	PART No.	PART NAME, DESCRIPTION	
C5209	NCB31EK-103X	CAPACITOR	0.01μF,25V	C6510	NCB31CK-104X	CAPACITOR	0.1μF,16V
C5210	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C6601	NCB11CK-225X	CAPACITOR	2.2μF,16V
C5211	NCB21CK-105X	CAPACITOR	1μF,16V	C6602	NCF21CZ-105X	CAPACITOR	1μF,16V
C5212	NCB21CK-105X	CAPACITOR	1μF,16V	C6603	NCB11CK-475X	CAPACITOR	4.7μF,16V
C5213	NCB31HK-332X	CAPACITOR	0.0033μF,50V	C6605	NDC31HJ-331X	CAPACITOR	330pF,50V
C5214	NCB31EK-103X	CAPACITOR	0.01μF,25V	C6606	NCF21CZ-105X	CAPACITOR	1μF,16V
C5218	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C6607	NCB11EK-105X	CAPACITOR	1μF,25V
C5219	NBP21CM-685X	T CAPACITOR	6.8μF,16V	C6610	NCB31EK-103X	CAPACITOR	0.01μF,25V
C5221	NCB11EK-105X	CAPACITOR	1μF,25V	C6616	NCB21CK-105X	CAPACITOR	1μF,16V
C5222	NCB31CK-104X	CAPACITOR	0.1μF,16V	C6622	NCB21CK-105X	CAPACITOR	1μF,16V
C5223	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C6700	NCB31HK-272X	CAPACITOR	0.0027μF,50V
C5225	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C6701	NCF21CZ-105X	CAPACITOR	1μF,16V
C5227	NCB31CK-104X	CAPACITOR	0.1μF,16V	C6702	NCB41CK-106X	CAPACITOR	10μF,16V
C5228	NCF31EZ-104X	CAPACITOR	0.1μF,25V	C6711	NCB21HK-472X	CAPACITOR	0.0047μF,50V
C5229	NCB11EK-105X	CAPACITOR	1μF,25V	C6802	NCF21CZ-105X	CAPACITOR	1μF,16V
C5230	NCB21EK-104X	CAPACITOR	0.1μF,25V	C6805	NCB31HK-102X	CAPACITOR	0.001μF,50V
C5232	NDC31HJ-100X	CAPACITOR	10pF,50V	C6810	NCB31EK-103X	CAPACITOR	0.01μF,25V
C5233	NDC31HJ-100X	CAPACITOR	10pF,50V	C6812	NCF21CZ-105X	CAPACITOR	1μF,16V
C5234	NDC31HJ-100X	CAPACITOR	10pF,50V	C6820	NCB31HK-102X	CAPACITOR	0.001μF,50V
C5235	NDC31HJ-100X	CAPACITOR	10pF,50V	C7001	NCB31EK-103X	CAPACITOR	0.01μF,25V
C5236	NDC31HJ-100X	CAPACITOR	10pF,50V	C7002	NBE20JM-106X	T CAPACITOR	10μF,6.3V
C5237	NDC31HJ-100X	CAPACITOR	10pF,50V	C7003	NBE20JM-335X	T CAPACITOR,D	3.3μF,6.3V
C6002	NEA71CM-106X	E CAPACITOR	10μF,16V	C7004	NCB31HK-332X	CAPACITOR,D	0.0033μF,50V
C6004	NCF21CZ-105X	CAPACITOR	1μF,16V	C7005	NCB31EK-103X	CAPACITOR,D	0.01μF,25V
C6005	NCB21CK-105X	CAPACITOR	1μF,16V	C7006	NDC31HJ-390X	CAPACITOR,D	39pF,50V
C6006	NCF21CZ-105X	CAPACITOR	1μF,16V	C7007	NCB31HK-102X	CAPACITOR,D	0.001μF,50V
C6007	NCB21CK-105X	CAPACITOR	1μF,16V	C7008	NCB31EK-103X	CAPACITOR,D	0.01μF,25V
C6009	NDC31HJ-820X	CAPACITOR	82pF,50V	C7012	NCB31CK-104X	CAPACITOR,D	0.1μF,16V
C6010	NCB21CK-224X	CAPACITOR	0.22μF,16V	C7013	NCB30JK-105X	CAPACITOR	1μF,6.3V
C6011	NCB21CK-104X	CAPACITOR	0.1μF,16V	C7019	NDC31HJ-121X	CAPACITOR	120pF,50V
C6012	NCB21CK-224X	CAPACITOR	0.22μF,16V	C7020	NDC31HJ-151X	CAPACITOR	150pF,50V
C6013	NCB31EK-473X	CAPACITOR	0.047μF,25V	C7021	NBP41EM-475X	T CAPACITOR	4.7μF,25V
C6014	NCB31EK-473X	CAPACITOR	0.047μF,25V	C7022	NCB31EK-103X	CAPACITOR	0.01μF,25V
C6015	NCB31EK-473X	CAPACITOR	0.047μF,25V	C7023	NCB31EK-103X	CAPACITOR	0.01μF,25V
C6016	NCB31EK-473X	CAPACITOR	0.047μF,25V	C7024	NBP41EM-475X	T CAPACITOR	4.7μF,25V
C6017	NCF21CZ-105X	CAPACITOR	1μF,16V	C7025	NCB31EK-103X	CAPACITOR	0.01μF,25V
C6101	NCB21CK-105X	CAPACITOR	1μF,16V	C7026	NBE20JM-106X	T CAPACITOR	10μF,6.3V
C6102	NCB10JK-106X	CAPACITOR	10μF,6.3V	C7028	NCB31EK-103X	CAPACITOR	0.01μF,25V
C6105	NCB31HK-102X	CAPACITOR	0.001μF,50V	C7029	NCB31CK-104X	CAPACITOR,A,D	0.1μF,16V
C6106	NCF21CZ-105X	CAPACITOR	1μF,16V	C7030	NCB31EK-103X	CAPACITOR	0.01μF,25V
C6107	NCF21CZ-105X	CAPACITOR	1μF,16V	C7031	NDC31HJ-220X	CAPACITOR	22pF,50V
C6110	NCB31HK-152X	CAPACITOR	0.0015μF,50V	C7032	NCB31CK-104X	CAPACITOR	0.1μF,16V
C6201	NCB21CK-105X	CAPACITOR	1μF,16V	C7033	NCB21CK-334X	CAPACITOR	0.33μF,16V
C6202	NCB10JK-106X	CAPACITOR	10μF,6.3V	C7034	NDC31HJ-331X	CAPACITOR	330pF,50V
C6203	NEA70JM-476X	E CAPACITOR	47μF,6.3V	C7035	NDC31HJ-330X	CAPACITOR	33pF,50V
C6205	NCB31HK-472X	CAPACITOR	0.0047μF,50V	C7036	NCB31CK-104X	CAPACITOR	0.1μF,16V
C6210	NCB31EK-103X	CAPACITOR	0.01μF,25V	C7037	NDC31HJ-330X	CAPACITOR	33pF,50V
C6301	NCB11CK-225X	CAPACITOR	2.2μF,16V	C7038	NCB31EK-103X	CAPACITOR	0.01μF,25V
C6302	NCB10JK-106X	CAPACITOR	10μF,6.3V	C7039	NBP41CM-106X	T CAPACITOR	10μF,16V
C6303	NEA70JM-226X	E CAPACITOR	22μF,6.3V	C7041	NBE21AM-106X	T CAPACITOR,D	10μF,10V
C6305	NCB31HK-561X	CAPACITOR	560pF,50V	C7042	NCB31EK-103X	CAPACITOR	0.01μF,25V
C6307	NEA71CM-106X	E CAPACITOR	10μF,16V	C7045	NDC31HJ-100X	CAPACITOR,A,B,C	10pF,50V
C6308	NBE20JM-106X	T CAPACITOR	10μF,6.3V	C7046	NDC31HJ-100X	CAPACITOR,A,B,C	10pF,50V
C6310	NCB31HK-102X	CAPACITOR	0.001μF,50V	C7047	NDC31HJ-100X	CAPACITOR,A,B,C	10pF,50V
C6401	NCB21CK-105X	CAPACITOR	1μF,16V	C7048	NBE20JM-106X	T CAPACITOR,A,B,C	10μF,6.3V
C6402	NCF21CZ-105X	CAPACITOR	1μF,16V	C7051	NCB31EK-103X	CAPACITOR	0.01μF,25V
C6406	NCB31CK-683X	CAPACITOR	0.068μF,16V	C7052	NBE20JM-106X	T CAPACITOR	10μF,6.3V
C6410	NCB21CK-474X	CAPACITOR	0.47μF,16V	C7053	NCB31EK-103X	CAPACITOR	0.01μF,25V
C6501	NCB21CK-105X	CAPACITOR	1μF,16V	C7054	NBP41EM-475X	T CAPACITOR	4.7μF,25V
C6502	NCF21CZ-105X	CAPACITOR	1μF,16V	C7056	NCB21CK-104X	CAPACITOR,D	0.1μF,16V
C6506	NCB21CK-224X	CAPACITOR	0.22μF,16V	C7057	NCB31EK-682X	CAPACITOR,A	0.0068μF,25V

# △ REF No.	PART No.	PART NAME, DESCRIPTION		# △ REF No.	PART No.	PART NAME, DESCRIPTION	
C7058	NCB31CK-104X	CAPACITOR,D	0.1μF,16V	CN2	QGF0507F3-14X	FFC/FPC CONNECTOR	
C7059	NBP41EM-475X	T CAPACITOR	4.7μF,25V	CN3	QGF0505F2-18X	FPC CONNECTOR	
C7060	NCB11CK-225X	CAPACITOR	2.2μF,16V	CN4	QGA1201F2-06X	CONNECTOR	
C7061	NCB11CK-475X	CAPACITOR,D	4.7μF,16V	CN5	QGF0507F1-11X	FPC CONNECTOR	
C7062	NCB11CK-475X	CAPACITOR,D	4.7μF,16V	CN7	QGF0507F3-11X	FFC/FPC CONNECTOR	
C7063	NCB11CK-475X	CAPACITOR,D	4.7μF,16V	CN8	QGA1201C2-02X	CONNECTOR	
C7064	NCB11EK-105X	CAPACITOR	1μF,25V	CN11	QGF0507F1-20X	FPC CONNECTOR,D	
C7065	NCB11EK-105X	CAPACITOR	1μF,25V	CN12	QGA1201F2-05X	CONNECTOR,A,B,C	
C7066	NCB11EK-105X	CAPACITOR	1μF,25V	CN13	QGF0507F3-14X	FFC/FPC CONNECTOR	
C7067	NCB31CK-104X	CAPACITOR	0.1μF,16V	CN15	QGF0507F1-22X	FPC CONNECTOR	
C7069	NCB31EK-103X	CAPACITOR	0.01μF,25V	CN16	QGF0305F1-33X	FPC CONNECTOR	
L101	NQL034K-330X	COIL	33μH	CN18	QGF0507F3-12X	FFC/FPC CONNECTOR	
L1601	NQL38DK-100X	COIL	10μH	CN19	QGF0301F1-39X	FPC CONNECTOR,B,C,D	
L1602	NQL144K-100X	COIL	10μH	CN22	QGF0507F3-14X	FFC/FPC CONNECTOR	
L2001	NQL144K-101X	COIL	100μH	CN25	QGB0506L1-30X	CONNECTOR	
L2003	NQL034K-470X	COIL	47μH	CN27	QGA1201C2-02X	CONNECTOR	
L2021	NQL144K-470X	COIL	47μH	CN28	QGA1002F1-13X	CONNECTOR	
L2401	NQL144K-470X	COIL	47μH	△ F6001	NMFZ007-2R0X-K	FUSE	T2.0A
L3002	NQR0006-001X	FERRITE BEAD		△ F6002	NMFZ010-R50X-A	FUSE	T0.5A
L3003	NQR0129-002X	FERRITE BEAD		SD1	LY42845-001A	SHIELD SHEET,B,C,D	
L3502	NQL38DK-220X	COIL	22μH	OT1	LY30016-049A	SPACER-A,FOR WR1	
L4201	NQR0006-001X	FERRITE BEAD		OT2	LY30029-0B6A	SPACER(A),FOR LI BATTERY	
L4501	NQR0006-001X	FERRITE BEAD					
L4502	NQL034K-220X	COIL	22μH				
L4701	NQL38DK-220X	COIL	22μH				
L5201	NQL38DK-470X	COIL	47μH				
L5202	NQL38DK-220X	COIL	22μH				
L5203	NQL38DK-220X	COIL	22μH				
L6001	NQL52EM-100X	COIL	10μH				
L6002	NQL52EM-100X	COIL	10μH				
L6101	NQL52EM-390X	COIL	39μH				
L6106	NQL144K-101X	COIL	100μH				
L6107	NQL144K-101X	COIL	100μH				
L6201	NQL52EM-470X	COIL	47μH				
L6301	NQL52EM-390X	COIL	39μH				
L6306	NQL52EM-470X	COIL	47μH				
L6401	NQL52EM-470X	COIL	47μH				
L6501	NQL52EM-470X	COIL	47μH				
L6601	NQL52EM-221X	COIL	220μH				
L6602	NQL144K-221X	COIL	220μH				
L6606	NQL144K-220X	COIL	22μH				
L6701	NQL52EM-100X	COIL	10μH				
L7001	NQL38DK-220X	COIL	22μH				
L7002	NQL085J-8R2X	COIL,D	8.2μH				
L7005	NQL38DK-220X	COIL	22μH				
L7006	NQL38DK-220X	COIL	22μH				
L7007	NQL38DK-220X	COIL	22μH				
L7008	NQL38DK-220X	COIL	22μH				
L7009	NQL38DK-220X	COIL	22μH				
L7010	NQL085J-4R7X	INDUCTOR	4.7μH				
L7012	NQL144K-100X	COIL,A,B,C	10μH				
X101	NAX0251-001X	CRYSTAL RESONATOR					
X102	NAX0325-001X	CRYSTAL RESONATOR					
X3001	QAX0565-001	CRYSTAL RESONATOR					
WR1	WJV0039-001A	E-PRIMARY WIRE,JUMP WIRE					
WR2	WJM0180-001B	E-SI C WIRE C-F,JP4001/JP4002,B,C,D					
WR3	YU40017-025-1	THIN WIRE,JP2005-SD1,B,C,D					
△ J101	QAB0022-001	LI BATTERY					
J504	LY31356-002A	JACK UNIT					
J505	QND0068-001	S JACK					
CN1	QGF0507F3-10X	FFC/FPC CONNECTOR					