



A HOWARD W. SAMS PUBLICATION



JANUARY 1967/75 cents

Broadcast Engineering

*the technical journal
of the broadcast-
communications industry*



FROM **RIKER**...ANOTHER NEW PLANT

RESearch

IMaGination

KNowLEDGE

ENGINEERING

RELIABILITY

...AND THAT SPELLS **VIDEO** PERFECTION



Riker Video Industries continues to grow and we thank YOU for making it possible. Even now our new plant is "bursting at the seams" with new concepts and new products to further revolutionize Video Broadcasting.

RIKER MAKES THEM ALL:

SYNC EQUIPMENT • SPECIAL EFFECTS • VIDEO PROCESSING AMPLIFIERS • DISTRIBUTION EQUIPMENT • VIDEO TEST EQUIPMENT • VIDEO SWITCHING EQUIPMENT • AUTOMATED PROGRAMMING SYSTEMS FOR SWITCHERS • VIDEOTAPE DROPOUT COMPENSATORS •

RIKER VIDEO INDUSTRIES, INC

100 Parkway Drive So. Hauppauge, New York 11787 • Phone 516 543 5200



...thinking always of tomorrow

Atlanta • Los Angeles • Detroit
Dallas • Washington, D.C.

Circle Item 1 on Tech Data Card


Now...



COLOR



with COHU'S new solid-state
VIDEO ENCODER*

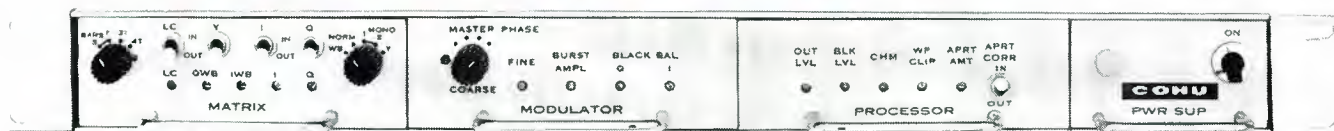

EXCEEDS ALL NTSC AND FCC SPECS

ACCEPTS RGB OR RGBM INPUTS

PROVIDES THREE-LINE OUTPUTS

HAS RGBM-LUMINANCE CORRECTION

IS 1-3/4" HIGH (IN 19-INCH RACK)

PURCHASE ORDERS MAY BE PLACED DIRECTLY WITH THE COHU
ENGINEERING REPRESENTATIVE IN YOUR AREA-OR
CALL BOB BOULIO IN SAN DIEGO.

Box 623
San Diego, California 92112
Phone 714-277-6700
TWX 910-335-1244



Circle Item 2 on Tech Data Card

publisher
Howard W. Sams

general manager
Donald W. Bradley

editor
William E. Burke

managing editor
James M. Moore

associate editor
Harold E. Hale

regional editors
George M. Frese, Northwest
Howard T. Head, Wash., D.C.
Robert A. Jones, Midwest
Allen B. Smith, North Central
Martin J. Taylor, Southwest
and Latin America

research librarian
Bonny Howland

production
Esther M. Rainey, *Manager*
Paul A. Cornelius, Jr., *Photography*

circulation
Pat Osborne, *Manager*

advertising sales offices
Hugh Wallace, *Sales Manager*

central and midwestern
Roy Henry
Howard W. Sams & Co., Inc.
4300 West 62nd St.
Indianapolis, Ind. 46206
291-3100

eastern
Gregory C. Masefield
Howard W. Sams & Co., Inc.
3 West 57th St.
New York 19, New York
MU 8-6350

southwestern
C. H. (Jake) Stockwell
C. H. Stockwell Co., 4916 West 64th St.
Mission, Kansas, RA 2-4417

western
LOS ANGELES OFFICE
G. R. (Jerry) Holtz
The Maurice A. Kimball Co., Inc.
2008 West Carson St., Suites 203-204
Torrance, California, 90501
320-2204
SAN FRANCISCO OFFICE
The Maurice A. Kimball Co., Inc.
580 Market St., Room 400
San Francisco 4, California
EX 2-3365

foreign
LONDON W.C. 2, ENGLAND
John Ashcraft, Leicester Square
WHITEHALL 0525
AMSTERDAM
John Ashcraft, Herengracht 365
Telefoon 24 09 08
PARIS 5, FRANCE
John Ashcraft, 9 Rue Lagrange
ODEON 20-87
TOKYO, JAPAN
International Media Representatives,
Ltd., 1, Kotohiracho, Shiba,
Minato-Ku, Tokyo
(502) 0656

Copyright © 1967
by Howard W. Sams & Co., Inc.
BROADCAST ENGINEERING is published
monthly by Technical Publications, Inc., an
affiliate of Howard W. Sams & Co., Inc. Edi-
torial, Circulation, and Advertising head-
quarters: 4300 West 62nd Street, Indianapolis,
Indiana 46206. SUBSCRIPTION PRICES:
U.S.A. \$6.00, one year; \$10.00, two years;
\$13.00, three years. Outside the U.S.A., add
\$1.00 per year for postage. Single copies are
75 cents, back issues are \$1.00.

the technical journal of the broadcast-communications industry

Broadcast Engineering

Volume 9, No. 1

January, 1967



CONTENTS

Features

A Telephone System for On-The-Air Use *Wayne Jones* 11

One station's approach to the requirements of listener-participation programs is presented.

What You Should Know About ESSA 16

This report outlines the activities of a government agency of which broadcasters should be aware.

Symbol Standardization 18

Efforts are being made within the industry to standardize schematic symbols.

1966 Annual Index 30

Departments


Book Review 8, 39 Engineers' Tech Data 59

Washington Bulletin 37 Advertisers' Index 61

News of the Industry 50 Classified Ads 62

New Products 54

Schematic diagrams are vital to the technical phases of broadcasting and all electronics industries. Our cover scene calls attention to the report beginning on page 18.

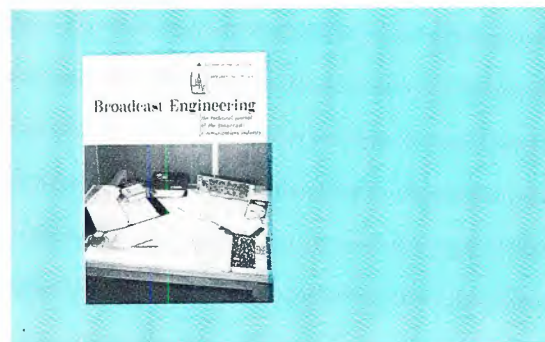

What's new in Reelsville, man?

One repeater of an intercity color TV relay system that uses no tubes, no filaments, no high voltages, no mechanical relays.

Microwave Associates' all-solid-state MA-2A relay system owned by WTWO Terre Haute, relays both NBC and ABC programming from Indianapolis to Danville to Reelsville to Farmersburg near Terre Haute through a single feed line antenna system. More than that. The antenna system was already up there, with conventional klystron equipment. But when the second network came aboard, it was add another tube system with antennas, or change over to a solid-state system diplexed into the existing antennas. WTWO opted for the new technology.

Color was one of the big reasons. In the MA-2A, the color-determining characteristics are controlled by highly stabile semiconductor devices and solid-state circuitry. The system is completely free of the drift and degradation that is associated with thermionic components.

Money was another reason. Paralleling the existing system with new tube equipment, new antennas, new feed lines, rigging costs — would have been expensive. More than they cared to spend for equipment some consider obsolete.

Reliability was still one more reason. Solid-state reliability. Sooner or later, tubes mean trouble. The ultimate solution is obvious. The MA-2A has no tubes.

What's new in Reelsville is also new at Rattlesnake Mountain, Washington; North Pole, New York; Bozrah, Connecticut and other famous places. Should it be near you?

Model	Band MHz	*Nominal RF Power	Nominal RCVR Noise Figure		Allocation
			without preamp	with preamp	
MA-2A	1990-2110	2 watts	10 dB	5 dB	TV Auxiliary broadcast STL, remote TV pickup, intercity relay
MA-7A	6875-7125	.5 watt	12 dB	5.5 dB	TV Auxiliary broadcast STL, remote TV pickup, intercity relay

Also available at other frequencies in the 1300 to 2300 MHz band for international allocation requirements.



MICROWAVE ASSOCIATES

Burlington, Massachusetts


Offices: Burlington, Mass.; 9911 Inglewood Ave., Inglewood, Cal.

Hyde House, Edgware Rd., London NW9, England

Subsidiary: Microwave Associates, Ltd., Luton, Beds, England

Circle Item 3 on Tech Data Card

www.americanradiohistory.com

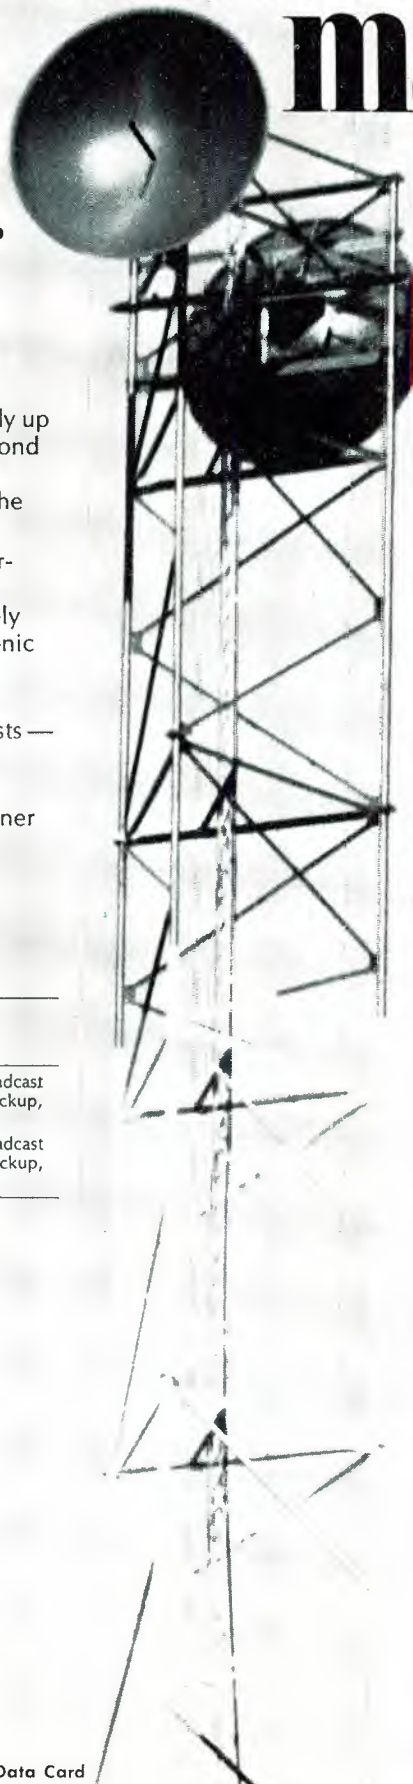



MARK 10 VISUAL MADE ORTHICON ZOOM camera


*the preferred black-and-white camera for
studio and field . . . preferred by quality-conscious
broadcasters throughout the country . . .*

Here's the "new concept" zoom camera that set the industry standard for 3" image orthicons. The Visual Mark 10 Zoom Camera combines the utmost in production flexibility with superior pictures and low operating expense. Major groups, leading independents, and educational broadcasters have specified the Mark 10 for


- crisp, snappy, live pictures
- built-in 10-to-1 zoom lens
- solid-state electronics
- long-life 3" ELCON I.O. tube
- improved S/N and high sensitivity
- simple camera setup and long, stable operation!



VISUAL ELECTRONICS CORPORATION
356 west 40th street • new york, n.y. 10018 • (212) 736-5840

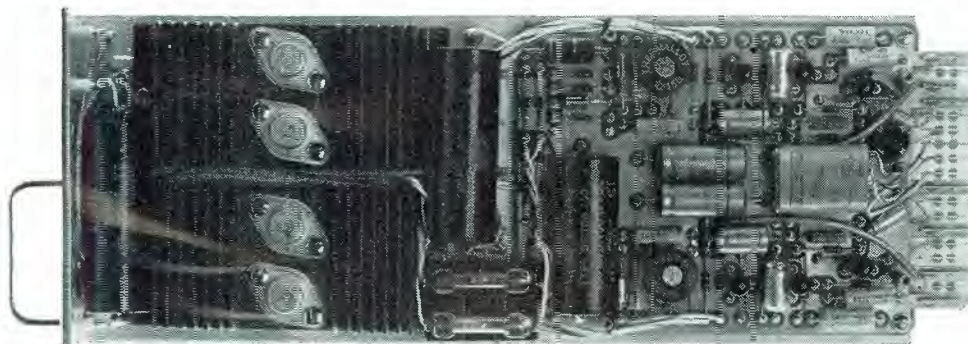

AA-601 Plug-in Audio Distribution Amplifier Module (with cover removed) — self contained, solid state design. Each module provides up to 6 outputs (60 in a 5¼" frame) at +24 dbm, 600 ohms balanced.

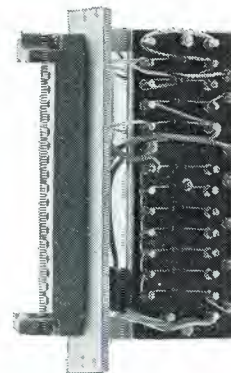

Connector Assembly mounted on rear of rack frame determines input/output configuration and provides all connection terminals needed.

The Audio Equivalent Of A Video Distribution Amplifier—Avoids Cross-Talk — Provides High Quality Performance and On-Air Reliability

AUDIO DA

- HIGH ISOLATION BETWEEN OUTPUTS AVOIDS CROSSTALK — 60 db or better across entire audio band width, balanced or unbalanced.
- ADVANCED, HIGH-RELIABILITY. SOLID-STATE CIRCUITRY — minimizes possibility of failures that interrupt or degrade audio.
- RESPONSE ± 0.25 db 30-15,000 CYCLES — less than 0.5% harmonic distortion.
- INPUT MATCHING OR BRIDGING, BALANCED OR UNBALANCED, 600 or 150 OHMS.
- WIDE VARIETY OF OUTPUT NUMBER/IMPEDANCE/LEVEL CONFIGURATIONS AVAILABLE.

See this, and many other new exciting Ward products at the NAB Convention




WARD ELECTRONIC INDUSTRIES


142 CENTRAL AVE., CLARK, N. J. 07066 (201-382-3700)

Circle Item 5 on Tech Data Card

start with **SUPER SOUNDS FAIRCHILD**

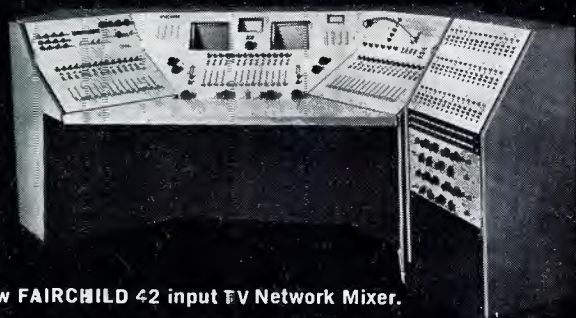

New FAIRCHILD 42 input TV Network Mixer.

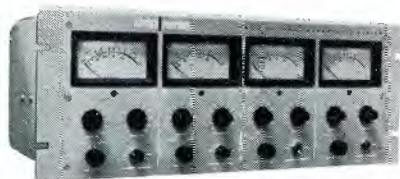

FAIRCHILD MASTER TAPE IMPROVEMENT SYSTEM

FAIRCHILD MTIS with "focused-gap" head design reduces bias-induced noise to a point where it is no greater than 2 db than the noise of virgin or bulk-erased tape. FAIRCHILD MTIS has an S/N ratio of 72 db on one track of a 4-track 1/2" tape. FAIRCHILD MTIS increases the recording level by 4 db over present standards, with the lowest harmonic, intermodulation, and cross-modulation distortion of only .5%. Only the FAIRCHILD MTIS comes in a compatible, convertible package allowing you to update your present tape transports to the highest quality "state of-the-art" recording standards.




FAIRCHILD CONAX

The world-accepted standard to control high frequency spillovers due to pre-emphasis. Maintain high levels even with brass and crashing cymbals in FM and recording.

THE REVERBERTRON

The new compact reverberation system which gives your station that real big voice. With the Reverbertron you can have that Carnegie Hall effect as close as the gain control on the Reverbertron. And there's the added plus of an increase in apparent loudness of your station sound due to reverberation, as originally described by Dr. Maxfield.



FAIRCHILD COMPACT COMPRESSOR MODEL 663

Allows creation of those up tight levels that contribute materially to presence and loudness combined with overload protection. The FAIRCHILD Model 663 Compact Compressor produces no distortion despite the amount of compression used... no thumps, no noise. The 663 provides adjustable release time and up to 20 db of compression. Model 663NL comes with unity gain and additional gain if needed with +18 dbm output.




FAIRCHILD PROGRAM EQUALIZER MODEL 664NL



An ideal no loss equalizer for broadcast and recording. The FAIRCHILD Model 664NL allows the production of the "hot, solid commercial" sound standard with major recording studios; transforms any conventional console into 'Big Board sound'. 1 1/2" x 5 1/4" high unit provides equalization up to 10 db at 4, 6, 8, 10, or 15 KHZ and low end equalization up to 10 db. Rolloffs also provided. The Model 664NLB has equalization at 2, 3, 4, 5, and 7.5 KHZ for motion picture demands. The FAIRCHILD Program Equalizer contains equalization plus 18 dbm amplifier output. Put life into your sound with the FAIRCHILD Equalizer.

FAIRCHILD LIMITER MODEL 670

Fast attack Stereo Limiter (50 microseconds) with low distortion and absence of thumps. Sum and difference limiting position eliminates floating stereo image. Includes regular channel A and B limiting. Dual controls, dual meters provided. Used throughout the world. Flexible release times make it indispensable in stereo recording and broadcasting.



Book Review

How to Build Speaker Enclosures: Alexis Badmaieff and Don Davis; Howard W. Sams & Co., Inc., Indianapolis, 1966; 144 pages, 5 1/2" x 8 1/2", soft cover: \$3.25.

In this book, it is stated, "Regardless of the quality of your sound-reproducing equipment, the quality of the final sound output is only as good as your speaker enclosures." The statement is substantiated by an analysis, both graphical and mathematical, of the effects different enclosure types, materials, and construction have on the sounds emanating from the speaker-drivers.

The volume begins with an evaluation of the five basic enclosure types: finite baffle, infinite baffle, bass reflex, horn projectors, and combination units. This is followed by an analysis of driver units, with statements regarding their limitations and the effects of changing sizes and types.

Next, speaker and enclosure placement are considered, with particular emphasis on phasing, efficiency, and equalization, both electronically and mechanically. This involves discussion of phasing and crossover networks, and how they are best related to individual components.

In the work are photographs, graphs, curves, and construction plans (including material lists) for many examples and combination units. Information in the book is sufficient to permit an individual to design the changes required for adapting any specific unit to the particular room or driver unit with which it will be employed.

Concluding chapters deal with crossover networks and how their design is achieved. Graphs and charts indicate frequency and power demands of various orchestral groups, and for the "coil winders" there is sufficient information to permit construction of networks in the workshop or home. The chapter dealing with constructing and testing describes the materials, tools, and methods by which the most satisfactory results can be obtained. Testing techniques, from simple arrangements to elaborate professional set-ups, are then presented.

This book has been written for a wide range of readership and essentially requires little more knowledge than what a speaker is. Source material is from those who manufacture both enclosures and speakers of the professional type. The authors are engineers who have been engaged in the design of enclosures and speakers for commercial manufacture.

FAIRCHILD

RECORDING EQUIPMENT CORPORATION
10-40 45th Ave., Long Island City 1, N. Y.

HOW CAN
A MICROPHONE
SO GLAMOROUS...

BE SO RUGGED?

It's lovely to look at, delightful to hold . . . and rugged as can be. Small wonder that Shure's new SM60 omnidirectional dynamic microphone was an instant success with both producers and engineers in advance field and studio tests and on subsequent programs with requirements as divergent as outdoor football telecasts and posh variety shows.

There are at least four big reasons why:

BEAUTY: Lustrous, non-glare matte metallic finish, classic simplicity of line, and tailored-to-the-hand dimensions add up to stunning good looks and superior handability.

STRENGTH: The case front is machined steel! You can drop it right on its nose with no danger of case dents or

damage to the internal structure. (In actual lab tests we drop the SM60's over and over from a height of 6 feet.)

PERFORMANCE: Built-in wind and "pop" filter eliminates or minimizes breath and wind noise. *Windscreen and front end instantly removable for cleaning.* Smooth and natural sound for both voice and music. Goes from stand to hand instantly.

ECONOMY: Priced competitively with conventional "workhorse" microphones. Why not check one out now? See your Shure Professional Products Distributor or contact Mr. Robert Carr, Manager of Professional Products Division, Shure Brothers, Inc., 222 Hartrey Ave., Evanston, Ill. 60204 — Phone 312 - 328-9000.

SHURE

SM60


OMNIDIRECTIONAL DYNAMIC MICROPHONE

OTHER SHURE PROFESSIONAL MICROPHONES . . . FOR SUPERIOR AUDIO




MODEL SM5
CARDIOID BOOM DYNAMIC

Because its cardioid directional pattern is uniquely uniform with frequency and symmetrical about its axis, the SM5 is singularly independent of the effects of environment. Even in extreme shooting situations (such as with tight sets, low ceilings, hard walls, low microphone angles, traffic or air-conditioner noise and rumble and changing distance) the SM5 minimizes sound coloration and ambient noise pickup.



MODEL SM76
3/4" OMNIDIRECTIONAL DYNAMIC


Ideal for interviews and audience participation, yet unusually smooth wide range response (40-20 KC) for critical music reproduction. Instantly detachable from stand. Steel case with Cannon connector.



MODEL SM50
OMNIDIRECTIONAL DYNAMIC

Self-windscreened and pop-free for news, sports, remotes, and interviews. Also ideal for many studio and control room applications. Comfortably balanced for hand or stand use. Natural response.

Circle Item 7 on Tech Data Card

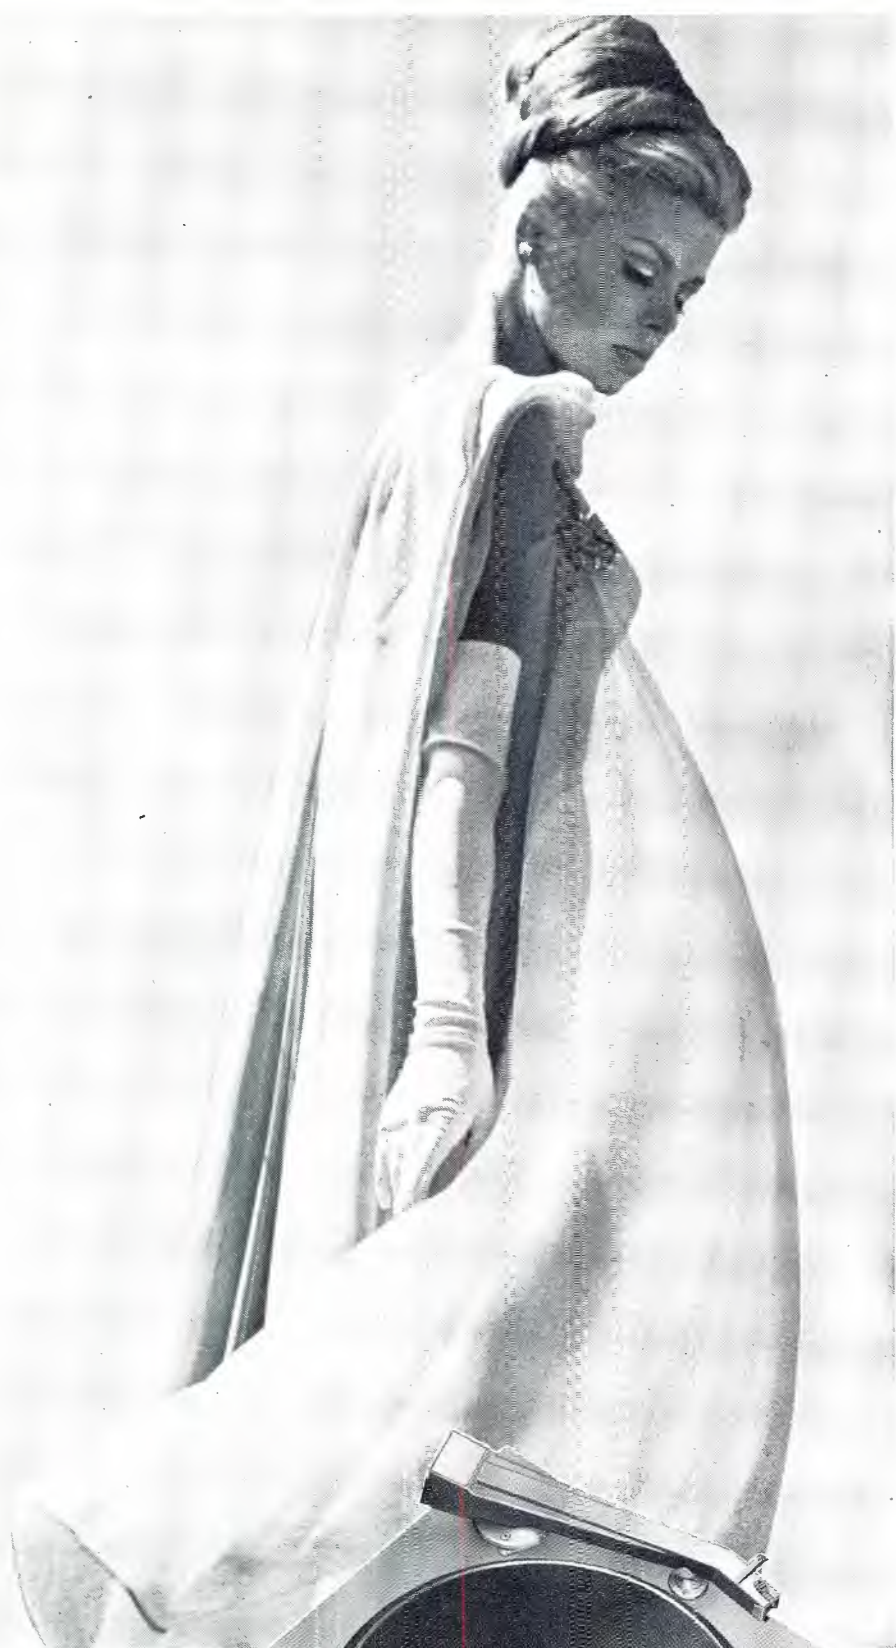

Smooth as silk with a GATES turntable

Quality reproduction of today's technically advanced recordings calls for new Gates 12" or 16" transcription equipment

Both turntable models achieve new lows in rumble, wow and flutter – without sacrificing quick cue-up and with years of reliability.

Perfect for stereo. All Gates turntables have a unique inner-hub drive, smooth-as-silk speed change and silent illuminated rocker off-on switch.

After all, Gates pioneered with the very first turntables for broadcasting 40 years ago. Truly, the soundest sound in broadcasting is the new sound of Gates.

Write today for our new Turntable Guide

12" or 16" models available.



GATES
HARRIS
INTERTYPE
CORPORATION

GATES RADIO COMPANY
QUINCY, ILLINOIS 62301, U.S.A.
A subsidiary of Harris-Intertype Corporation

Circle Item 4 on Tech Data Card

A TELEPHONE SYSTEM FOR ON-THE-AIR USE

By Wayne Jones*—A large amount of telephone on-the-air programming requires an elaborate installation.

Since its opening in December, 1959, Montreal radio station CKGM has featured daily "open line" programs, inviting listeners' opinions, via their home telephones, on various topics. CKGM engineers, therefore, have spent considerable time developing the most functional and flexible system for airing the calls, keeping in mind the necessity for the best possible on-air sound, and for previewing the program (and when warranted, deleting objectionable material) during an actual broadcast.

Numerous installations have been tested during the past five years, but until now, all have been only partially satisfactory, while some left much to be desired. Most systems consisted of a key-set telephone, with the announcer using a handset, an operator's headset, and most recently, a simple speakerphone arrangement.

The telephone equipment was connected to the broadcast console through a standard recorder connector supplied by the telephone company. This system, however, had several disadvantages. The announcer, at times, had to contend with both his regular on-air headset and the cumbersome telephone headset. His voice would often feed through the telephone, via the recorder connector, into the console, causing an objectionable filter effect. The effect could be reduced if the announcer positioned his mouthpiece away from his mouth and if the operator "rode levels" on the telephone mixer at the console. The operator also had to close this mixer completely whenever the announcer selected lines, in order to prevent the loud click from sounding on the air.

During programs, an operator answers and screens all calls before the announcer takes them on the

air. Although visual indication was provided to the announcer in the form of steady or flashing lamps on his key set, it was often difficult for him to discern which line to take next. Occasionally, he would take a call on the air while it was being screened by the operator. Also, as the lines used for this program appeared on other sets throughout the station, a call on the air could be interrupted by an unsuspecting party elsewhere in the station.

To solve these and other problems, the following system was developed and installed in cooperation with the Bell Telephone Company of Canada.

The new system had to satisfy several conditions:

1. The announcer should not have to wear any headsets other than his normal broadcast headset.
2. There should be no objectionable filter effect in the announcer's voice while using the telephone; that is, the output provided by the telephone company should contain only the distant party's voice and not the announcer's.
3. Some means must be provided whereby a call already on the

air could not be interrupted, and conversely, the announcer should not be able to put on the air a line in use off-air, for example, a call being screened by the operator.

4. The equipment must be silent in operation, both mechanically and electrically; *i.e.*, switches should not click, and it should be possible to leave the console mixer position for the telephone open while the announcer is selecting lines.
5. The equipment must be easy to operate and not allow "on-air" errors.
6. The equipment must be flexible. It should allow restricted conferencing and other special effects as the need arises.
7. The operator should retain overall control of the system and, from his position in the control room, be able to supervise its operation.
8. The equipment must be provided with a backup system in case the main system fails.
9. The aesthetic appearance of the studio must be maintained. Preferably, the equipment should be "built-in."

*Engineering Department, CKGM, Montreal, Quebec.

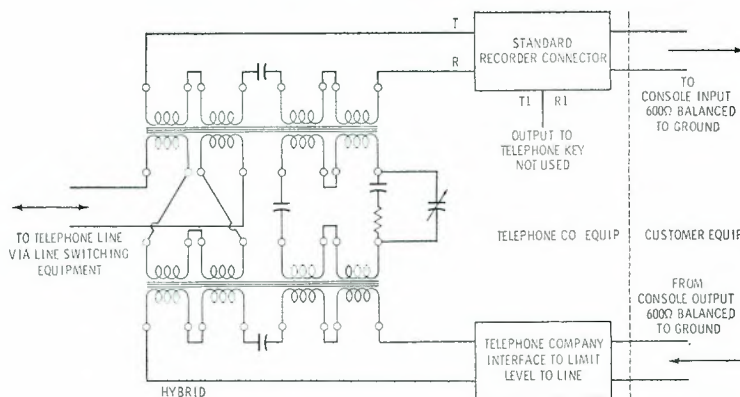


Fig. 1. A simplified schematic of the hybrid circuit used at Montreal's CKGM.

10. A 1400-Hz beep to the caller every 15 seconds, as required by law, must be supplied to inform the caller that his conversation is being recorded and/or broadcast.

The telephone systems that evolved may be divided into two sections: the equipment used to connect the telephone line to the broadcast equipment, and the line-selecting, or switching, system.

Telephone Equipment

The initial work evolved around a basic speakerphone system. This unit is the familiar "hands-free" telephone supplied by the telephone company for commercial and private use.

Basically the speakerphone system is composed of four items: a control unit containing plug-in amplifier cards; a microphone, or transmitter, with a built-in preamp; a speaker; and a power transformer. The telephone line is connected to the control unit, where it is split by a hybrid coil into a transmit and a receive circuit. The transmit circuit consists of a series of amplifiers fed by a microphone, and the receive section is a series of amplifiers feeding a speaker. Because the hybrid is not 100% efficient, feedback would result if it were not for a unique feature of the speakerphone, its voice switching circuitry. Whenever sound above threshold level is presented to the microphone, the receive path is switched off and the transmit path is switched on, almost instantaneously. Because of this feature, information presented to the microphone appears

on the telephone line and not at the speaker. The speakerphone is incorporated into the console by using the control-unit receive channel to feed the console. Thus the filter-effect problem is solved; that is, the announcer's voice feeds the console only by means of the broadcast microphone and not by way of the telephone microphone.

The use of this voice switching circuitry is the key to the new system. An additional modification to the standard system was the inclusion of two transmitters, rather than the conventional single transmitter. This was found necessary to maintain an adequate transmit level to the caller when more than one person was present in the studio.

To provide a greater control of the transmit level and to make up for the loss which occurs when two microphones are used in parallel, a variable-gain amplifier was inserted in the transmit path.

The voice switching circuitry causes another effect: The announcer's voice always takes precedence over the telephone caller. If both are speaking, the caller will not be heard. This may or may not be desirable in all applications, but it is helpful if the line is noisy.

Normally, speaker gain on the speakerphone is adjusted by means of a volume control on the transmitter chassis. This control was removed and relocated in the control unit. Adjustment of this control, and variable-gain amplifiers in the transmit path, permits the voice switching threshold to be varied over a

limited range. In the "on-air" studio, it was found desirable to add a relay which operates simultaneously with the studio microphone on/off relay. This mutes the speakerphone speaker in the studio. At the same time, the relay transfers the speaker output to the telephone input on the console. Thus, the telephone output appears at the console only when the announcer's microphone is on. There is a slight leak from the transmitter to the control unit output and, if this switch were not made, the announcer's voice, via this telephone link, could appear on the air in spite of the fact that his announce microphone is off. The action of the muting relay permits the announcer to converse with callers prior to going on the air without fear of the call going on the air—even if the operator has neglected to close the telephone pot.

In an early trial, the speaker was not muted with the announcer's microphone so that the announcer could hear the caller without using his headset. It was found that this was not desirable, because the operator could not cut an unwanted caller off the air by simply closing the telephone "pot." The caller would come through the announcer's microphone. The speaker in the recording room is not muted, however, because immediate cutoff is not necessary.

An alternate to the speakerphone method is the use of a 4-wire terminating set. This device, basically a hybrid circuit, is used by telephone companies in toll circuits to change 2-wire lines to 4-wire lines.

A simplified schematic of the hybrid is shown in Fig. 1. By connecting the repeating coils as shown, it is possible to separate the two-direction (transmit and receive) pair into two single-direction pairs. This means that a signal presented to the transmit input will appear only on the telephone line and not at the receive output. Conversely, the receive output will contain only signals coming from the telephone line. This is accomplished by setting up a carefully balanced bridge circuit and nulling out the transmit signal from the receive section. The balancing network containing the vari-

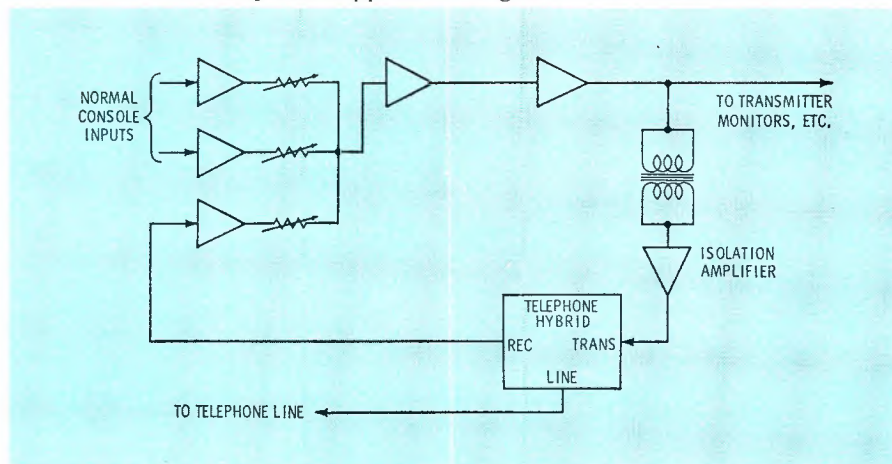


Fig. 2. Input from console to the hybrid is fed through isolation transformer.

able capacitor is used to balance the bridge against the telephone line. An optimum value is selected because each line has different capacitive, resistive, and inductive characteristics. These parameters are a function of line length, cable type, intermediate equipment in the line, and the equipment at each end of the line.

As might be expected, the isolation between transmit and receive sections is not perfect. The leakage is, however, low enough to make the hybrid very useful in our application. No discussion of actual values in decibels will be given here because so many variables are involved.

In order to connect the radio-station equipment to the telephone-company equipment, an interface is required. On the receive portion of the hybrid, this interface takes the form of the standard recorder connector. This provides the isolation necessary and supplies a 1400-Hz beep at 15-second intervals to the caller as well. This is possible because the hybrid is not 100% ef-

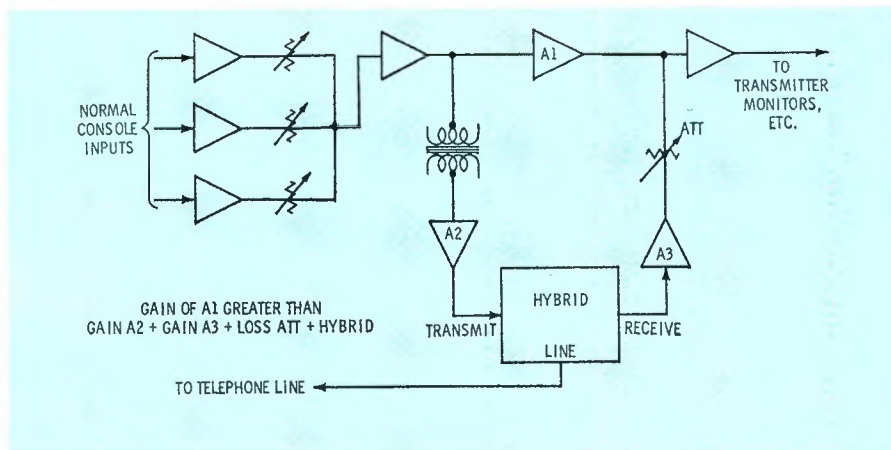


Fig. 3. Better method for connecting hybrid involves opening console circuit.

ficient, and the beep presented to the receive leg is fed back to the caller.

The interface inserted in the transmit leg is used to insure that the customer will not feed the telephone line with too much level, which would interfere with other circuits in adjacent cable pairs. The interface also provides the correct impedance match to the customer equipment.

The hybrid is connected to the console as shown in Fig. 2. Oscilla-

tion will take place if the gain of the console, a function of the telephone-pot setting, is equal to or greater than the loss between the transmit and receive sections. In practice, the loss should be sufficient to allow a satisfactory level from the caller. A somewhat better method of connection is shown in Fig. 3. It involves breaking into the internal circuitry of the console and could present problems in consoles with high-impedance, unbalanced circuitry.

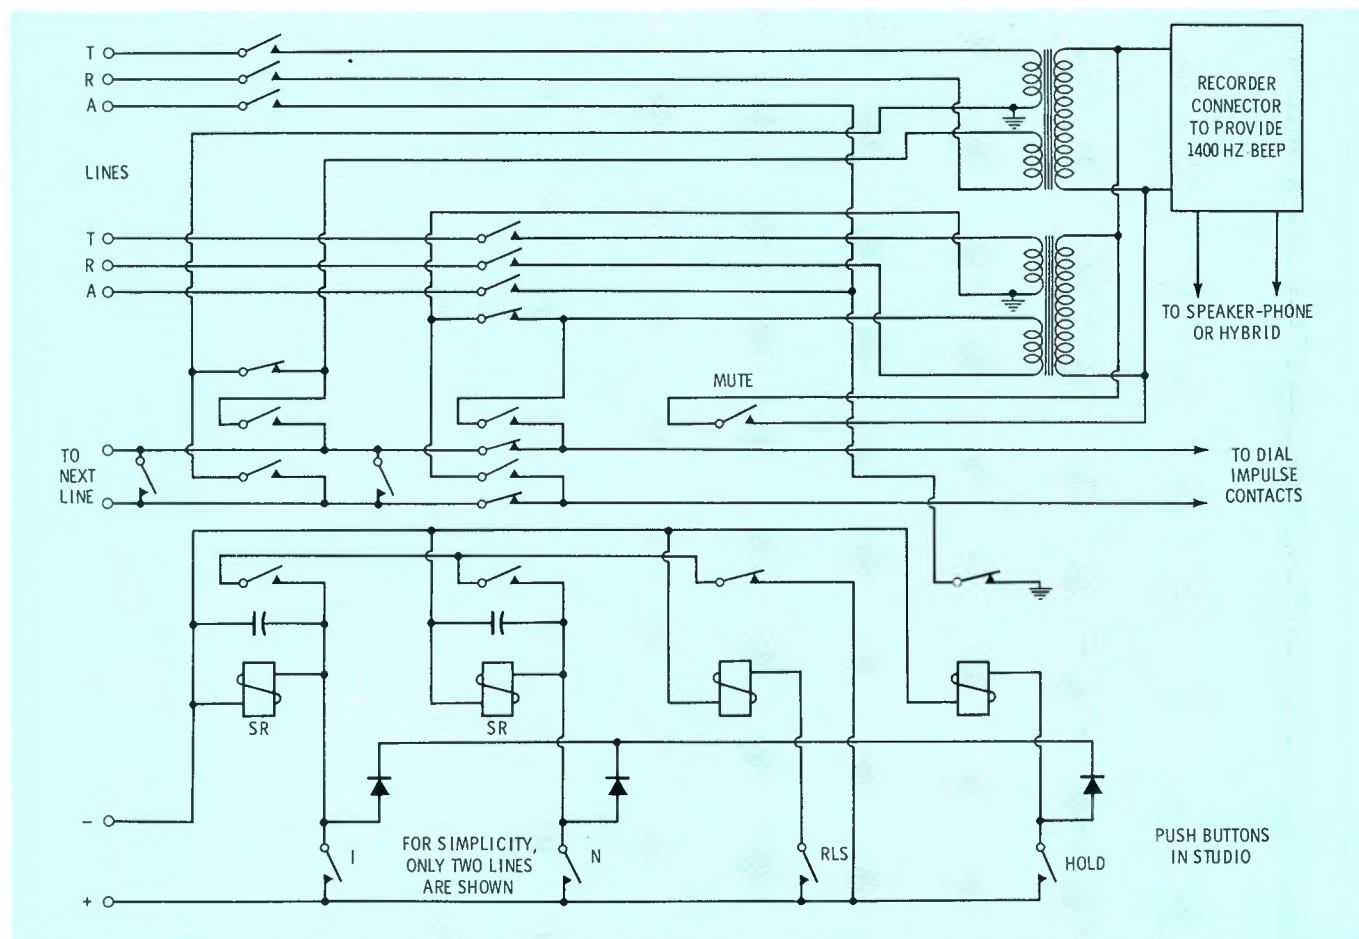


Fig. 4. Basic circuit of CKGM switching system shows only two line inputs for simplicity in explanation of operation.

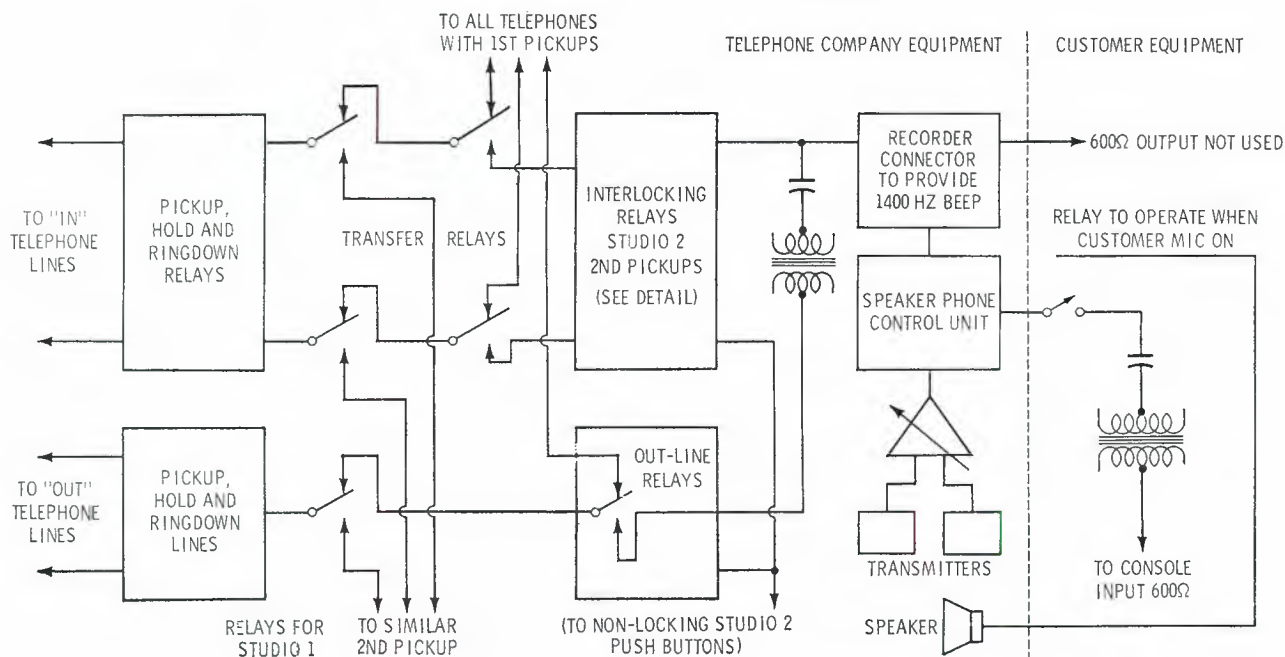


Fig. 5. Functional diagram of switching arrangement in Fig. 4. indicates relationship of various system elements.

We use the former method at CKGM. It is used in conjunction with an alternate back-up system to the speakerphone. It is also valuable in other ways; because it feeds anything going through the console to the telephone line, the announcer need not be in an adjacent studio to be heard by the telephone caller (as is true of the speakerphone system). He may be "on remote." Thus, although a particular program may be on location, all the telephone facilities of the studio are retained without the use of telephone equipment

at the remote location. Since various telephone contests, etc., form an integral part of our daily format, this feature is very desirable.

It is difficult to indicate which of the two systems, the speakerphone or the hybrid, is better. The speakerphone is cheaper and easier to connect to the console, but the hybrid provides better quality to and from the caller and the other advantages enumerated.

The Switching System

Several switching arrangements

are possible. Our primary system is similar in operation to the ordinary key-telephone set in that push buttons are used to select lines. (See Figs. 4 and 5.)

Figs. 6 and 7 show that the studio equipment consists of built-in, flush-mounted call directors. Six lines are associated with our system, four for receiving calls and two for placing outgoing calls. Each of the four incoming lines appears at two separate pickup buttons, a first pickup and a second pickup. The first pickup operates conventionally;



Fig. 6. ON AIR studio arrangement shows all components.



Fig. 7. Close-up of the flush-mounted call director unit.

that is, the button locks and is used in conjunction with a standard telephone handset. In practice, this pickup is used by the operator (who is equipped with an identical call director) to answer and screen the calls. If a call is to be used, the line is placed on "hold," and a transfer button is pushed. This excludes the line from all first pick-ups and transfers it to the second pickups. The second pickups appear at the studio call directors on non-locking, momentary-action push buttons. This type of button differs from a regular button in that it operates silently.

The reason for the transfer action is the prevention of interference with a line which is "on-air." In addition, the announcer cannot put a line on the air prematurely; the operator must first transfer it.

We wished to have a conferencing circuit incorporated into the system. While the regulatory tariffs of the telephone company are

"sticky" on this point, they do provide it as a standard accessory to a PBX and conferencing circuit, which allows a maximum of two outside trunks and three internal stations to be bridged in a conference.

The circuit provides for capacitive coupling of the lines. Since no amplifiers are used in the circuitry, transmission is not guaranteed between the two outside trunks. If one or both of the outside parties is at a considerable distance from the circuit, transmission between these parties will suffer. We were willing to tolerate this disadvantage, however, and a circuit similar to the one provided for the PBX was incorporated.

Any two lines may be bridged by simultaneously pushing the pickup buttons associated with the particular lines. The objective is to allow the moderator to converse with two people simultaneously, and it is seldom necessary for the two callers to

converse between themselves. Therefore, the nonamplified conferencing does fall within the telephone-company tariffs.

Normally the four incoming lines are jammed, and an alternate method for placing outgoing calls had to be provided. Two out lines were incorporated in the system in a manner different from the in lines. As before, they appear on first pickups, but these lines may be placed on the air by simply pushing a single, momentary-action button instead of by using a transfer button. This action excludes the line from all first pickups and connects it, via the telephone dial, to the speaker-phone. If the line is vacant (normally the case because these are unlisted lines), pushing the button will put dial tone on the speaker-phone, and a call may be dialed. By using the second out line, a sec-

• Please turn to page 40.

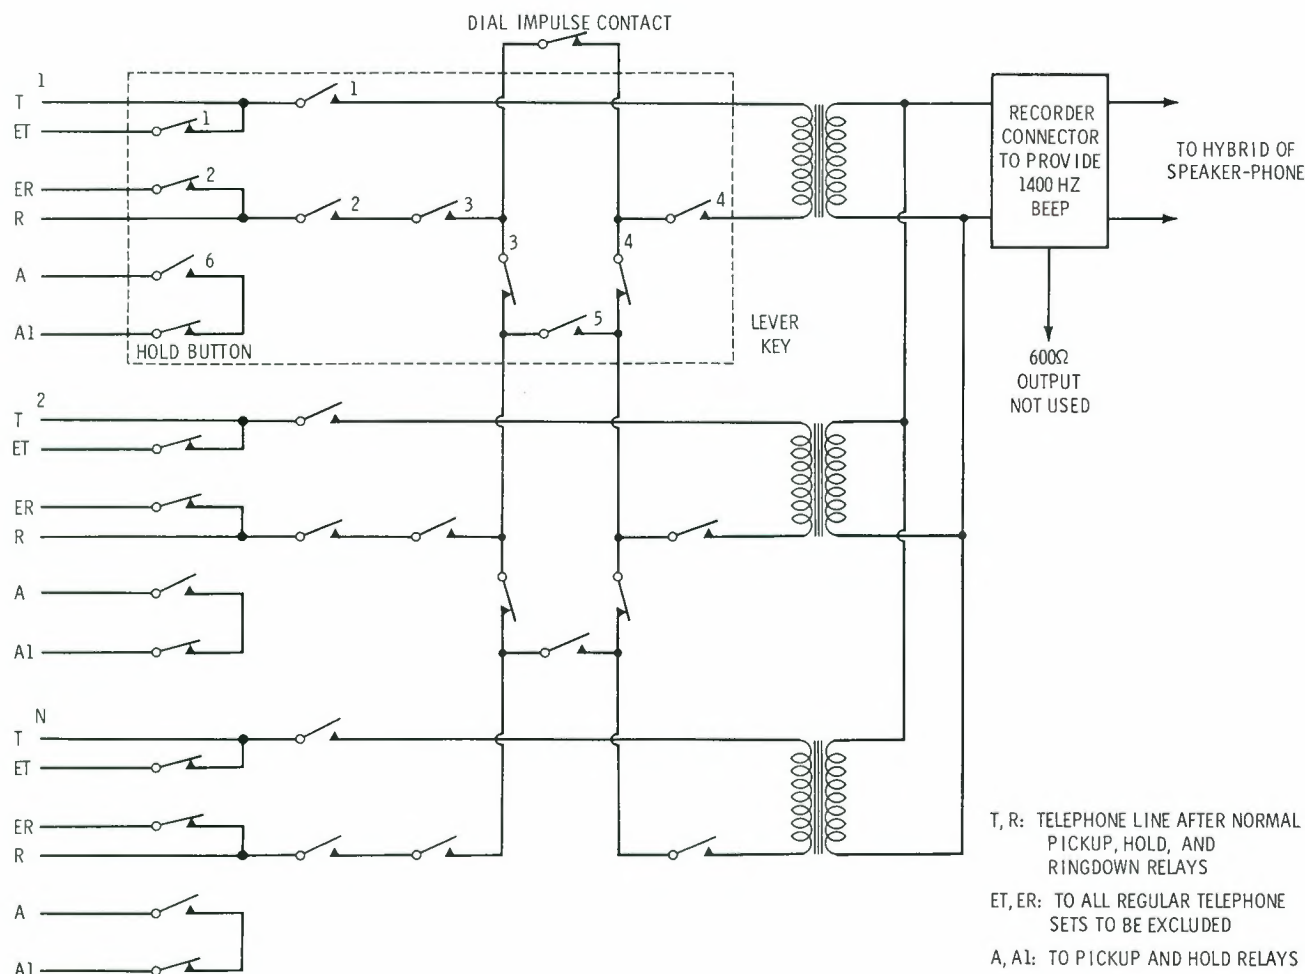


Fig. 8. Alternate switching method is simpler to construct, does not require relays, but is not as smooth in operation.

WHAT YOU SHOULD KNOW ABOUT ESSA

Although not always in the spotlight, the work of this agency is important to broadcasters.

When broadcasters think of government agencies, the set of initials that comes to mind first is bound to be "FCC." This is only natural, since any regulatory agency is certain to make its presence known to the people whose activities it regulates. There are, however, other government agencies which are not of a regulatory nature but which do carry on activities related to broadcasting, and therefore of interest to broadcast engineers and technicians. Such an agency is the Environmental Science Services Administration (ESSA).

What Is ESSA?

Although ESSA itself is less than two years old, its component parts have long histories of service within the government. In July 1965, ESSA came into being within the Department of Commerce when the Weather Bureau and the Coast and Geodetic Survey were brought together into one agency. In October of the same year, they were joined by the former Central Radio Propagation Laboratory of the National Bureau of Standards.

The mission of ESSA is to study our natural environment and, in so far as possible, to predict its behavior. The President has described ESSA as providing "... a single national focus to describe, understand, and predict the state of the oceans, the state of the upper and lower atmosphere, and the size and shape of the earth."

A simplified chart of the organization of ESSA is shown in Fig. 1. The function of the Weather Bureau—observing, reporting, and forecasting the weather—is well known to all broadcasters, for broadcast stations have traditionally served as a vital link in disseminating weather information to the public. Likewise, most broadcast technical persons are familiar with the nautical and aeronautical charts prepared by the Coast and Geodetic Survey. Activities of this arm of ESSA also include measurements of the gravity, magnetic field, size, and shape of the earth. The Survey maintains a series of reference markers throughout the United States for use in mapping, surveying, and other projects.

Other work relates to earthquake studies, warnings of seismic sea waves, and oceanographic studies.

Perhaps less well known are the Environmental Data Service and the National Environmental Satellite Center. The Environmental Data Service functions as a central agency for receiving, storing, and disseminating information on the physical environment from all over the world. It serves commerce, industry, and the general public.

The National Environmental Satellite Center, as its name suggests, has as its function the planning and operation of environmental satellite systems. Data from satellites is collected and analyzed to learn more about our environment.

The four Institutes for Environmental Research carry on studies of the earth, the atmosphere, and space. Research by the Institute for Earth Sciences involves geomagnetism, seismology, geodesy, and related earth sciences. The Institute for Oceanography studies the ocean and its relationship to the total environment. The Institute for Atmospheric Sciences studies the behavior of the atmosphere so that weather forecasting can be improved and weather control ultimately may become possible.

Of most direct import to the broadcast industry are the activities of the Institute for Telecommunication Sciences and Aeronomy, and these will be the subject of the remainder of this report.

The Work of the ITSa

Although the ITSa became a part of the newly created ESSA in 1965, its predecessors date back to 1909. In that year, the National Bureau of Standards first undertook the study of radio-wave propagation. Four years later, the first NBS Radio Section was formed.

As the science and industry of



Many activities of ESSA are conducted in this building in Boulder, Colorado.

telecommunications advanced, so did the studies of propagation by the NBS. Its research led to the development of such systems and devices as the aircraft radio beacon and the ILS landing system.

In 1942, the Radio Section became part of the Interservice Radio Propagation Laboratory, which was set up within the NBS at the request of the combined Chiefs of Staff of the United States Armed Forces. After World War II, the functions of this Laboratory were taken over by the Central Radio Propagation Laboratory (CRPL), which became a Division of the Bureau in 1946. In 1964, the CRPL was designated one of the four research institutes of the NBS, and in 1965 it was transferred from the NBS to ESSA and renamed the Institute for Telecommunication Sciences and Aeronomy.

The new name is one which more fully describes the areas of responsibility of the organization. The primary mission of the Institute is support of the nation's telecommunications activity—an activity representing an annual expenditure on the order of \$20 billion.

From the primary mission has evolved a second one, study and forecasting of periods of solar activity and disturbance of the ionosphere. Thus aeronomy, the science of the upper atmosphere, becomes a natural and essential part of the work and name of the Institute.

ITSA Laboratories

For carrying out its missions, the ITSA is divided into four Laboratories, each of which pursues a specialized field of research.

Ionospheric Telecommunications Laboratory

The work of this Laboratory has to do with long-distance communication by way of the ionosphere. Activities to which the research is related include AM broadcast, navigational systems, and over-the-horizon radar and communications systems.

The Laboratory conducts a number of research programs and furnishes consulting and advisory services to industry and government. In general the research encompasses four broad areas.

The first area of study is the prediction of attenuation and phase delay of signals having frequencies below about 1.5 MHz. Quantities of interest include frequency, direction of propagation, latitude, time of day, season, electrical constants of the earth, and the ionospheric parameters on which predictions can be based. Related studies are concerned with the effects of abnormal ionospheric conditions on propagation at these frequencies.

Other research is directed toward determining the effects of the atmosphere and the terrain on signals transmitted by forward and back-scattered ionospheric propagation. Parameters of interest in this case are amplitude, phase, time delay, and angles of arrival.

Ionospheric predictions are of vital importance to many users of radio communications, both military and civilian. This service is a third area of involvement of the

Ionospheric Telecommunications Laboratory. In this connection, a network of ionosonde observatories is employed to observe the state of the ionosphere. A facility at Long Branch, Illinois provides experimental transmissions to other ITSA and agency users.

The fourth area of research is communications technology. Its objective is stated as "... the development of information for improving telecommunications, and the utilization of the radio frequency spectrum." Specific research includes antennas, information transmission, and frequency utilization. Information obtained is useful in the design and evaluation of equipment and systems for telecommunications.

Tropospheric Telecommunications Laboratory

This Laboratory, as its name implies, is concerned with propagation

• Please turn to page 44.

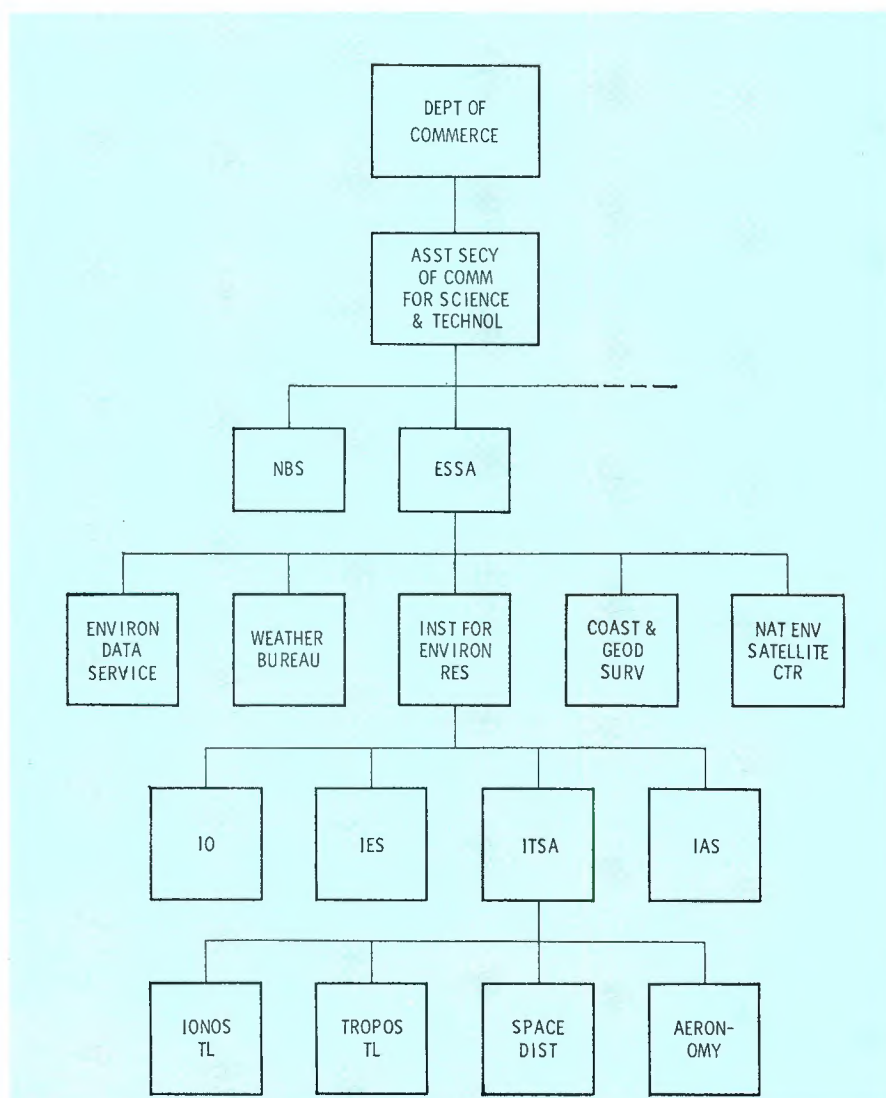


Fig. 1. Simplified chart shows organizational features of ESSA and the ITSA.

SYMBOL STANDARDIZATION

As a publisher in the electronics industry, Howard W. Sams & Co., Inc., has a vital interest in the standardization of schematic symbols. There is at present an industry-wide program to accomplish this. For many years now, each manufacturing company and sometimes, we suspect, each individual draftsman, had a different concept as to the proper method of symbolization.

The Electronic Industries Association (formed by participating electronics manufacturing concerns), in cooperation with the American Standards Association, has now published a list of graphical electronic symbols with the objective of simplification of symbols, reduction of drafting time, and a better understanding of schematics by all technicians.

We are reproducing a portion of the list as an aid to the technician. We feel that if all manufacturers and publishers were to adopt these symbols as standard, the time spent by technicians in interpreting symbols could be reduced greatly.

The Howard W. Sams & Co., Inc., is adopting these standard symbols in all of its publications.

Definitions and Interpretation of Symbols

Symbol—A symbol is the aggregate of all its parts, but to improve readability, parts of a symbol, such as a multi-section capacitor, may be separated.

Orientation of Symbol—The orientation of a symbol on drawing, including a mirror image, does not alter the meaning of a symbol.

Arrow Heads—Unless otherwise noted, no significance is placed on open or closed arrowheads.

Angles of Lines—Generally, the angle at which a connecting line is brought to a graphical symbol has no particular significance unless otherwise noted.

Width of Lines—The width of the line does not affect the meaning of a symbol.

List of Symbols

1. Adjustability & Variability

(a) Coils



(b) Potentiometers—arrowhead parallel to symbol indicates direction of clockwise rotation viewed from knob, actuator, or mounted end.


(c) Capacitors—arrowhead indicates variability.

3. Antenna


3.1 General




3.1.1 Dipole



3.1.2 Loop



3.1.3 Folded dipole



3.1.4 Ferrite antenna



3.1.5 Mono-pole



RCA
NEW
LOOK



AUDIO SYSTEMS... SOUND THE RIGHT NOTE!





Completely transistorized... with modular construction and automatic operating features

RCA audio is the right choice for the bright sound!

AUDIO FOR AM, FM, TV

RCA's pioneering in space-age electronics has paved the way for a whole new generation of audio equipments. There's a complete line of cartridge tape equipment—and reel-to-reel recorders, new Universal turntable, audio relay switcher. Also a new line of audio amplifiers and an automatic programmer.

CONSOLETTES FOR FLEXIBILITY

Choice of four consolettes—from a four-mixer, 20-input equipment to the very versatile deluxe console for dual channel and FM stereo use. They all use plug-in chassis for custom-tailoring to needs and flexibility in operation.

TAPE RECORDERS WITH AUTOMATIC CUEING

Cartridge tape equipments have plug-in tape decks for versatility. They include tone-cue operation—a stop cue, end-of-message cue, and trip cue. And now, even the reel-to-reel types include these cue features, assuring semi-automatic operation between recorders. All these tape equipments are available in both monaural and stereo types.

AUTOMATIC PROGRAMMING


Designed to program fifteen events from any 18 program sources. Number of events may be increased with ease by adding these Programmers in series.

THE "NEW LOOK" IN AUDIO

This is the audio equipment with the RCA "New Look". It costs less to install and less to operate . . . provides highest flexibility. You would expect the best from RCA with its years of experience in radio and television.



Plug-in chassis give flexibility to consolettes.

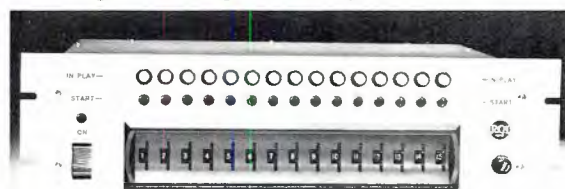

Automatic programmer handles 15 events from 18 different audio sources.




Cartridge tape features cue tone operation.

For further information about these RCA "New Look" equipments write RCA Broadcast and Television Equipment, Building 15-5, Camden, N.J. Or call your RCA Broadcast Representative.



The Most Trusted Name in Electronics

4. Arrester gap or spark gap



7. Battery

The long line is always positive, but polarity may be indicated in addition.

7.2 One cell



7.3 Two cells



7.3.1 Multiple cells



8. Capacitor

8.1 General—If it is necessary to identify the capacitor electrodes, the curved element shall represent the outside electrode in fixed paper-, mica-, ceramic-, and plastic-dielectric capacitors; the moving element in adjustable and variable capacitors; and the low-potential element in feedthrough capacitors.



8.1.1 Polarized capacitor (electrolytic)



8.1.2 When multiple-section, electrolytic capacitors are diagrammed, each section must be identified with the appropriate symbol to correspond with the identifier used on the actual part.



8.1.2.1 Nonpolarized electrolytic capacitor.



8.1.2.2 Multiple sections in common container.



8.1.3 Adjustable or variable capacitor.




8.1.4 Adjustable or variable capacitors with mechanical linkage of units.



8.1.5 Feedthrough capacitor.



11. Circuit breaker

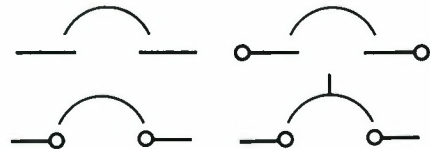

13. Circuit returns

The rake symbol may be used to indicate accessible metal ground, earth ground, the chassis, or where chassis ground is different or isolated. The other symbols may indicate ground, chassis ground, or B—.



16. Coil, relay



18. Connector—disconnecting device.

18.1 Female contact, commonly used for a jack or receptacle (usually stationary).



18.2 Male contact, commonly used for a plug (usually movable).



18.3 Separable connectors (shown engaged).



18.6 Communication (telephone) type connector.


18.6.1 Two-conductor jack.



18.6.2 Two-conductor plug.



18.6.3 Three-conductor jack with two break contacts (normals) and one auxiliary make contact.



18.6.4 Three-conductor plug.



18.8 Connectors of the type commonly used for power-supply purposes (convenience outlets and mating connectors).

18.8.1 Female contact.



18.8.2 Male contact.



18.8.3 Two-conductor nonpolarized connector with female contacts.



18.8.4 Two-conductor nonpolarized connector with male contacts.



18.8.5 Two-conductor polarized connector with female contacts.



18.8.6 Two-conductor polarized connector with male contacts.




18.9.1 Phono-type connector plug.




18.9.2 Phono-type jack.



18.9.3 Wire end of female socket (cap)

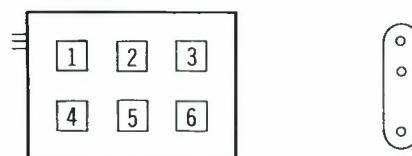

18.9.4 Pin end of male plug.

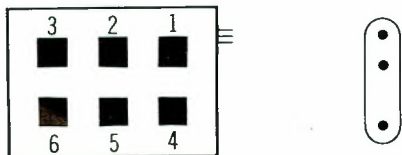

25. Core

25.1 General or air core

If it is necessary to identify an air core, a note should appear adjacent to the symbol of the inductor or transformer.

25.1.2 Adjustable core.



25.2.1 Laminated core.



25.2.2 Powdered-iron core.



25.3 Core of electromagnet.



31. Delay line.



36. Fuse.

36.1 General.



36.2 Special types



* Indicate type by note: e. g., wire, link, etc.

42. Inductor.

42.1 General

Use symbols as shown unless otherwise indicated or required by special considerations.




42.2 If it is desired especially to distinguish magnetic-core inductors.




42.3 Tapped, air core.



42.4 Adjustable inductor; arrowhead points in direction of adjustment location. Bottom of coil is at mounted end.




42.4.1 Adjustable inductor, air-core; arrowhead indicates movable tap. Unless noted, coil mounting end not specified.



42.7 Saturable-core inductor (reactor).

Polarity marks may be added to direct-current winding. Explanatory words and arrow are not part of the symbol shown.



44. Lamp.

44.1 Ballast lamp (tube)

The primary characteristic of the element within the circle is designed to vary nonlinearly with the temperature of the element.



44.2 Lamp, fluorescent.



44.3 Lamp: glow, cold-cathode, neon.




44.4 Lamp, incandescent.



48. Meter—instrument.

Note—The asterisk is not a part of the symbol. Always replace the asterisk by one of the following letter combinations, depending on the function of the meter or instrument, unless some other identification is provided in the circle and explained on the diagram.

DB or DBM	DB (decibel) meter
MA	Milliammeter
O	Ohmmeter
R	Recording meter
T	Tuning meter
V	Voltmeter
VOM	Volt ohmmeter
VTVM	Vacuum tube voltmeter
VU	Volume indicator, audio level meter
W	Wattmeter



46. Machine, rotating.


51. Microphone.

46.2 Generator.



51.1 Ultrasonic microphone or transducer.

* Indicate type by note: ceramic, crystal, dynamic, etc.

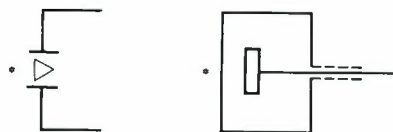

46.3 Motor.




51.2 Audio-frequency microphone.

* Indicate type by note.




46.12.1 Alternating current reversible motor.

56. Oscillator, signal generator, or unspecified alternating-current source.

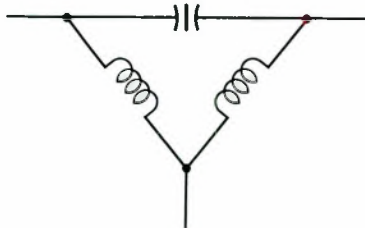

46.12.2 Alternating-current clock motor with time switch.

58. Wiring.



58.5 Crossing of paths or conductors not connected. The crossing is not necessarily at a 90° angle.



46.12.3 Phono motor.

58.6.2 Junction of connected paths, conductors, or wires.




58.8.1 Shielded single conductor.



58.8.3 Two-conductor cable.



58.8.4 Shielded two-conductor cable, shield grounded.



61. Pickup head.

61.1 General.




61.2 Magnetic recording head.

* Indicate by letter: RECORD, PLAYBACK, ERASE.



61.6 Stereo pickup.



62. Piezoelectric unit.



64. Receiver-earphone, headphone.

64.2 Headset, double.



64.3 Headset, single.



65. Rectifier, semiconductor.


65.1 General.

Note: Triangle points in direction of forward (easy) current as indicated by a DC ammeter, unless otherwise noted adjacent to the symbol. Electron flow is in the opposite direction.

65.2 Semiconductor rectifier.



65.2.2 Silicon controlled rectifier (SCR).




66. Relay.

Fundamental symbols for contacts, mechanical connections, coils, etc., are the basis of relay symbols and should be used to represent relays on complete diagrams.

66.2 Relay coil.



66.3 Relay contacts.



BREAK



MAKE




TRANSFER

68. Resistor.


68.1 General.



68.2 Tapped resistor.



68.3 With adjustable contact.



68.8.1 Symmetrical varistor, voltage-sensitive resistor, etc.

* Indicate variable by letter
V voltage
I current
L light
T temperature



73. Semiconductor devices.

73.9.1 Semiconductor diode.



73.9.2 Capacitive diode.




73.9.3 Breakdown (Zener) diode.



73.9.5 Tunnel diode.




73.10.1 PNP transistor.



73.10.1.1 Transistor element connected to envelope.



73.10.2 NPN transistor.



73.10.3 Unijunction transistor.



75. Speaker.



ELECTROSTATIC SPEAKER

76. Switch.

Fundamental symbols for contacts, mechanical connections, etc., may be used for switch symbols. The standard method of showing switches is in a position with no operating force applied. For switches that may be in two or more positions and for switches that may be operated by some mechanical device, clarifying notes may be necessary to explain position shown and position at which actuation starts.


76.1 Single throw, general.



76.2 Double throw, general.



76.2.1 Two-pole, double-throw switch.



76.6 Push button.

76.6.1 Circuit closing (make).



76.6.2 Circuit opening (break).



76.6.3 Two circuit (transfer).



“...CBS Volumax performs flawlessly. Please do not invent any more until we wear these out. At the present rate of deterioration, we will need to replace them by 2015 A.D.”

This is what station WRNC in Raleigh, North Carolina, said about our equipment. They own both the Audimax Automatic Level Control and the Volumax Automatic Peak Controller. Station WIGS in Gouverneur, New York, wrote, “Enclosed find check for Volumax 400. You couldn’t get it back from us for twice the price . . .” KLIN in Lincoln, Nebraska, purchased Audimax. They told us, “It is an engineer’s dream for absolute level control”. WAYB in Waynesboro, Virginia, tells us, “Purchased a Volumax and we are tickled to 99 and 44/100% modulation with it . . . Congratulations on a fine product”. Station KHOW in Denver, Colorado, said, “It was surprising to receive equipment that exceeded specifications”.

There isn’t enough space here to include all the letters we’ve received praising Audimax and Volumax. But judge for yourself. Like all CBS Laboratories equipment, they’re available for a 30-day free trial. Audimax \$665. Volumax \$665. FM Volumax \$695. Write to us, or better yet call The Professional Products Dept. directly — Collect. Telephone (203) 327-2000. Maybe you’ll be in our next ad.



CBS LABORATORIES

Stamford, Connecticut. A Division of
Columbia Broadcasting System, Inc.


Circle Item 8 on Tech Data Card

76.12 Selector or multiposition switch.

76.12.1 General.



76.12.4 Segmental contact.

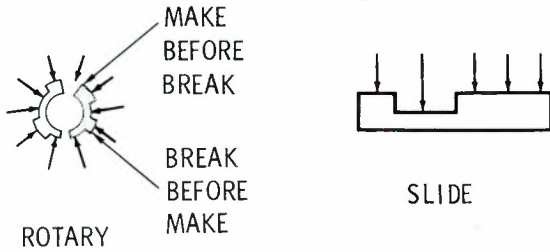

79. Test point, recognition symbol.


79.1 General.

Used to emphasize test-point location.



79.2.1 Test-point recognition for test jack and circuit terminal.

* Reference designation. Not part of symbol.

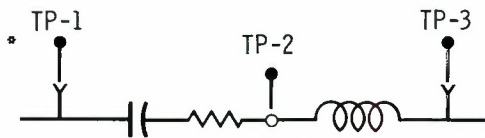

84. Thermistor.

"T" indicates that the primary characteristic of the element within the circuit is a function of temperature.

84.1 General.




86. Transformer.


86.1 General.




86.2 Magnetic-core transformer.




86.2.1 Shielded transformer.



86.2.2 Transformer with magnetic core and shield.




86.3 One winding with adjustable inductance.



86.4 Each winding with separately adjustable inductance.



86.6 With taps, single phase.



86.7 Autotransformer, single phase.





If You Haven't Seen the Polychrome Camera, You're Missing the Finest Color in Television

*Not to mention the most advanced
live color camera on the market*

Here's why...

① Choice of pickup tubes. Some broadcasters prefer the four-Plumbicon* type camera. Others lean toward the IO-Vidicon tube complement. May even be that the best answer is still to be developed. Makes no difference with the Tarzian Polychrome camera. It accommodates any present or contemplated pickup tube. How's that for flexibility? And you avoid costly obsolescence, too.

② Color fidelity. Exceptional. Original optical design delivers superior color performance—limited only by the capability of existing pickup tubes. Separate luminance channel assures excellent color and monochrome results.

③ Design. Rugged magnesium housing trims size and weight down to what you'd expect to find only with monochrome equipment. Viewfinder is removable for added mobility and accessibility. Bold contemporary styling and textured door panels mark a fresh departure from old fashioned, bulky look.

④ Electronics. All camera and processing circuitry is fully transistorized with plug-in module construction throughout.

More? There's plenty. Like 10:1 zoom lens. Looks built-in, but detaches readily. Powered zoom, focus and remote iris for smooth control. The list is nearly endless.

Exciting? You bet it is. Why waste time. Call today—collect. We're anxious to fill you in on the details. Area Code is 812/332-7251. That's Sarkes Tarzian, Inc., Broadcast Equipment Division, Bloomington, Indiana.

* Reg. T. M. of N. V. Philips Co., Holland



Symbol of Excellence in Electronics

Broadcast Engineering

1966 ANNUAL INDEX

ALLOCATIONS

Channels	
—clear, assignments	Aug 13
—TV, sharing with land mobile	W Sep 53

AM

Antennas, directional, unwanted nulls	Jun 20
Applications, pending, list	L Nov 6
Channels, clear	W Jan 26
—proposals expected	W Jan 51
Frequency, finding	Aug 12
MEOV Rule, proposed	W Sep 54
Mexican treaty, negotiations for	W Sep 54
Policy questions	W Oct 55
Power, minimum, increase	W Feb 37
Presunrise power-reduction system	Jul 15
Proof-of-performance, audio, transmission set for	Mar 31
Signal variations	Aug 16
Stations	
—daytime, presunrise operation of	W Dec 31
—resisting of	W Jan 25
	W May 53

ANTENNAS

Grounding	Feb 24
KCSM broadcast center	May 26
Towers, grounding for	

lightning	Nov 11
	Dec 26

ANTENNAS, AM

Current indicating meters, linearizing	May 48
Directional, feed parameters	May 18
Ground systems	Dec 33
—maintenance of	May 30
Presunrise power-reduction system	Jul 15

ANTENNAS, DIRECTIONAL

AM	
—unwanted nulls	Jun 20
—feed parameters	May 18
Inspection requirements for AM	W Oct 56
MEOV Rule, proposed	W Sep 54

ANTENNAS, FM

Chrysler Building, on	Jul 12
Field strength, predicting for	Aug 30

ANTENNAS, TV

Beam tilting for ITFS	Nov 26
Beamwidth, vertical, requirements for ITFS	Nov 23
Mountaintop, KBYU-TV	Nov 34
Movement for maximum wind load	Dec 24
Polarization, to reduce	

interference	Dec 18
Positioning, ITFS	Dec 22

ASSOCIATIONS & CONFERENCES

AES	
—Annual Convention	Sep 46
—Spring Convention, high-lights of	Aug 23
Canada, Central, Broadcasters Convention	
—1965	Feb 16
—1966	N Sep 58
Daytime Broadcasters Meet	Jun 62
IEEE Broadcast Symposium	W Sep 54
Mexico, broadcasters meet in	Jan 17
NAB Convention, 1966	
—engineering sessions	Apr 45
—news of	Feb 58
—preview	Mar 51
—review	Apr 37
NAEB Convention, highlights of	Jan 23
NCTA Convention	
—preview	Jun 33
—products at	Sep 38
—technical sessions	Sep 28

SMPTE

—anniversary, 50th	N Sep 62
—Conference	N Mar 103

AUDIO EQUIPMENT

Alarm, dropout	E Dec 38
----------------	----------

NOTE: The letter E indicates "Engineers' Exchange," L indicates "Letters to the Editor," N indicates "News of the Industry," and W indicates "Late Bulletin From Washington."

Amplifiers, transistorized	Apr 10
Arms and cartridges	Jan 21
Bridging unit, variable loss	E Nov 50
Cartridge tape machines, modification to	E Jun 56
Disc playback, reducing distortion in	Nov 36
Equalization, cartridge preamplifier	Nov 37
Equalizers, turntable	Jan 22
Grounding of	Feb 19
Microphones —choosing and using	Jun 13
—professional	Sep 18
.....	Oct 24
—correction	Nov 6
—ribbon, repair to	E Aug 43
Monitors	E Apr 65
Networks, combining	Sep 16
Patch Panels	Apr 25
Preamplifiers, turntable	Jan 22
Proof-of-performance —small-budget equipment for	Jun 16
—transmission set for	Mar 31
Remote amplifier, redundant	Nov 18
Solid-state, servicing	Jul 18
—corrections	Sep 6
.....	Oct 6
Switcher modification	E Aug 42
Transmission set, fixed T-pad (corrections)	L Aug 6
Turntables —care and testing of	Jan 20
—cartridge care	Mar 43
—switch modification	E May 68

AUDIO MEASUREMENTS

Proof-of-performance —small-budget equipment for	Jun 16
—transmission set for	Mar 31
Records, audio test	Nov 37

AUTOMATION

Hardware	Feb 11
Indicators	Feb 11
Programmer	Feb 11
Switchers	Feb 11
Television, for Station Break	Feb 11
Timing systems	Feb 11
.....	Feb 46

BOOK REVIEWS

<i>Basic Microwaves</i>	Jun 30
<i>Communications Electronics Circuits</i>	Aug 33
<i>Electronics</i>	Dec 29
<i>Lightning Protection Code 1965</i>	Jan 50
<i>North American Radio-TV Station Guide, 3rd Edition</i>	Feb 32
<i>Oscilloscope Measuring Technique</i>	Sep 50
<i>Transistors: Principles and Applications</i>	May 56

BUILDING DESIGN & CONSTRUCTION

Flooring, modular	Dec 15
Floor plans, radio stations	Mar 21
—correction	L Apr 10
KCSM Broadcast Center	May 26
Lightning, effects on	Dec 34
Studios, WTMJ	Dec 14

CAMERA EQUIPMENT & OPERATION

Color, modification in 3-V	E May 70
TV, live color	Oct 11
Waveform, inexpensive	Aug 24

CATV

Bureau	W Sep 54
Copyright	W Jul 33

FCC

—data for	W Jun 51
—jurisdiction over	W Apr 52
—regulations, new	Jun 32
Future, NCTA reviews	W Aug 36
Importation ban, San Diego —order	W Sep 53
—order stayed	W Oct 55
Leaseback tariffs	W Dec 31
Microwave, 18 GHz, substitution for cable	W Jan 51
.....	W Oct 55
NCTA Convention, preview of	Jun 33
Origination, local	W Oct 56
Program requirements	W Feb 38
Survey	N Dec 43
Task force	W Oct 55

COLOR TV

Basics of	Jan 18
Cameras —live	Oct 11
—modification to	E May 70
Football, broadcasting	Mar 16
Lighting for	Jan 19
.....	Jun 24

COMPONENTS & MATERIALS

Conductors, surface area/ resistance ratios	Feb 23
Inductors, momentary shorts in	E Feb 6
.....	L Aug 6
Switch, function, repair	E Jul 40

CONSTRUCTION & MODIFICATION

Alarm —audio dropout	E Dec 38
—signal failure	E Aug 44
Amplifier, remote, redundant	Nov 18
Antenna-current measurement, audio killer for	E Jun 54
Bridging unit, variable loss	E Nov 50
Broadcasts, remote, pickup from PA output	E Oct 53
Camera, waveform, inexpensive	Aug 24
Chopper, modulation, modifications	E Jan 48
.....	Oct 48
—correction	Sep 70
Eraser, tape, junk-box	Jul 30
Flasher-beacon repair, emergency	E Jun 54
Generator, sine/square-wave	E Nov 48
Grounding	Feb 17
Impedance measurement, comparison	E Jul 42
Line checker	E Dec 40
Microphones, ribbon, repair of	E Aug 43
National Electrical Code	Nov 40
Patch panel	Apr 25
Presunrise power-reduction system	Jul 17
Proof-of-performance, audio, trans- mission set for	Mar 32
—kits for	Jun 16
Stepper voltage, increasing low	E Oct 52
Switches, audio, modifications to	E Aug 42
Transmission set, fixed T-pad (corrections)	L Aug 6

Tube socket, 866A	E Jul 44
-------------------------	----------

EBS

Failsafe, interruption for	E Jun 58
Monitors for	L Jun 6

EMERGENCY OPERATIONS & EQUIPMENT

Alarm, signal failure	E Aug 44
Gas-powered FM station (electric utility standby)	Mar 14

ENGINEERING THEORY

Antennas, AM —directional —feed parameters	May 18
—nulls, unwanted	Jun 20
—presunrise power reduction	Jul 15
Signal variations	Aug 16

ENGINEERS' EXCHANGE

Alarm, signal failure	Aug 44
Antenna current readings, audio killer for	Jun 54
Beacon-flasher repair, emergency	Jun 54
Cartridge machines, protection from voltage surges	Dec 36
Cartridge, turntable, maintenance	Aug 43
Chopper, modulation, modifications	Jan 48
Diodes replace 6H6 and 6AL5	Dec 41
EBS, failsafe, interrupting for tests	Jun 58
Filament supply, emergency	Aug 44
Impedance measurement, comparison	Jul 42
Microphone, ribbon, repair	Aug 43
Monitor, tower-light, remote	Dec 40
Socket, 866A, modification to	Jul 44
Switcher, audio, modification	Aug 42
Switch, function, repairing	Jul 40
Tape-cartridge machine, ATC, modification to	Jun 56
Telephone lines, modification to	Jun 58
Transmitters, neutralization of	Jan 44
Tube testing, shortcut to	Jul 40
Wire, locating in cable	Jul 46

ETV

Instructional Television Fixed Service (ITFS)	Sep 12
—applications	Sep 14
—channels	Sep 12
—Committee representatives	Sep 15
—cost, system	Sep 14
—equipment —manufacturers	Sep 15
—selection for	Dec 20
—installation, system	Dec 22
—measurement, system	Dec 22
—rules	Oct 56
KCSM broadcast center	May 26
Level, signal, 2500-MHz	Oct 38
System, statewide	Nov 14

FAA

Flasher-beacon repair, emergency	E Jun 54
Towers, marking and lighting	Mar 26
.....	Apr 21

FACILITIES

Building plans, radio station	Mar 21
-------------------------------------	--------

FM, stereo stations, directory of	May 38
Maintenance	Apr 28

FCC

Applications	
—ITFS authorizations, for	Sep 14
—pending, list	L Nov 6
Call-letter notification	W Sep 54
CATV	
—Bureau	W Sep 54
—leaseback tariffs, to investigate	W Dec 31
—regulations for	Jun 32
Commercial practices, licensees must report	W Dec 32
Commissioner vacancy	Jun 52
Element 3, revised examination for	N Feb 54
Fines	W Mar 93
.....	W Apr 53
.....	W Oct 56
Frequency, AM, finding	Aug 12
License renewals, public may participate	W May 53
MEOV Rule, proposed	W Sep 54
Overmodulation, FM	Feb 14
—corrections	L Jul 6
Remote control rules, relaxation of for	
AM and FM	Sep 54
Satellite relay, office for	W Oct 56
Stations, daytime AM, presunrise operation of	W Dec 31
STL, new rules for TV	W Oct 56
Subscription TV, inquiry into	May 53
Towers, marking and lighting	Mar 90
.....	Apr 21
US-Mexico Agreement	Jul 21
Want ad operation authorized	W Aug 35

FM

Antenna on Chrysler Building	Jul 12
Applications, pending, list	L Nov 6
Building plans	Mar 21
Field strength, predicting	Aug 30
Gas-powered station	Mar 14
Interference, third-harmonic, Oklahoma City case	W Sep 54
Multiplex, use of, for land-mobile	W Jan 25
Overmodulation	Feb 14
Proof-of-performance, Audio, transmission set for	Mar 31
Stereo and multiplex monitors, new rules for	Jul 33
Stereo stations, directory of	May 38
Transmitters, modern design of	Apr 15

GROUNDING

AC Power	Feb 18
Antenna, AM, maintenance of	May 30
Antennas and transmitters	Feb 24
Audio frequency	Feb 19
Buildings, for lightning	Dec 34
Copper conductors, resistance of	Feb 19
DC	Feb 17
Equipment in RF fields	Feb 28
General	Feb 17
Radio frequency	Feb 23
Removing the Mystery From (corrections)	L Jul 6
Resistance, system	Dec 26
Towers for lightning	Nov 11
.....	Dec 26
Video frequency	Feb 22

INTERNATIONAL

Canada, Central, broadcasters meet	Feb 16
Micronesia, radio broadcasting in	Apr 19
Mexico	
—broadcasters meet in	Jan 17
—treaty with U.S., AM	Jul 21
—new	W Apr 53
.....	W Aug 36
.....	W Sep 54

LICENSES

Operator, Element 3 revised	N Feb 54
Station, applications, late renewal	W Feb 37

LIGHTING

Beacon-flasher repair, emergency	E Jun 54
Color TV, for	Jan 19
—show	Jun 24
Fixtures, quartz-iodine lamps, for	Jan 15
—converting for	Jan 16
Quartz-iodine	Jan 14
Studio, WTMJ	Dec 14
Temperatures, color, Kelvin	Jan 18
Tower	Mar 26
.....	Apr 21
—monitor for remote reading	E Dec 40

MAINTENANCE

Audio	
—equipment, solid-state	Jul 18
—corrections	Sep 6
.....	Oct 6
—patch panels, labeling	Apr 26
Cable location	E Jul 46
Cartridges	
—disc playback	Mar 43
—turntable	E Aug 43
Condensation in transmitter, protection from	E Nov 52
Difficulties	Mar 13
Filament supply, emergency	E Aug 44
Function switch repair	E Jul 40
Ground systems, AM	May 30
Lightning protection, fusing for	E Nov 52
National Electrical Code	Nov 40
Records, test	Nov 37
Shop, equipping	Apr 28
Socket, 866A, modification to	E Jul 44
Towers, painting and galvanizing	Apr 54
Tube-test short-cut	E Jul 40
Video, pulse-cross display, interpreting	May 16

MANAGEMENT

Investment Tax Credit on Equipment	Mar 50
Promotions, conduct of	W Apr 52

MATCHING NETWORKS

Antenna, AM	
—directional, feed parameters	May 18
—power-reduction system, presunrise	Jul 15
Combining/splitting	Sep 16

MEASUREMENTS

Antenna	
—AM directional, unwanted	

nulls	Jun 20
—current	
—audio killer for	E Jun 54
—indicators, AM, linearizing	May 48
Camera, inexpensive waveform	Aug 24
C/N, for ITFS systems	Dec 24
Field strength, FM	Aug 30
Frequency-measuring services	May 34
Hertz, definition of	May 34
ITFS systems, on	Dec 22
Signal variations	Aug 16
Use of, in AM frequency searches	Aug 14
Vertical Interval Test Signals	Aug 20
Video quality	Oct 44
VSWR	
—FM antenna, Chrysler Building	Jul 13
—ITFS systems, in	Dec 22

METERS

Antenna current indicators, linearizing	May 48
Impedance measurement	E Jul 42
Maintenance, for	Apr 26

MICROPHONES

Choosing and using	Jun 13
Professional	Sep 18
.....	Oct 26
—correction	Nov 6
Ribbon, repair to	E Aug 43

MICROWAVE

Antenna	
—movement for maximum wind load	Dec 24
—positioning	Dec 22
Beam tilting for ITFS	Nov 26
Beamwidth, vertical, requirements for ITFS	Nov 23
CATV, 18-gHz for	W Oct 55
C/N ratios	
—2500-MHz systems	Nov 21
—combining	Dec 19
ERP, computation of	Nov 23
Fading, 2500-MHz systems	Nov 21
Fresnel-zone clearance	Oct 36
ITFS equipment, manufacturers	Sep 15
Level, signal, 2500-MHz	Oct 38
Repeaters, active, C/N ratios with	Dec 19
VSWR in ITFS systems	Dec 22

MISCELLANEOUS

Broadcasting, Forty-Five Years of	L Jan 6
Consulting Author dinner	Apr 48
Radio shows, recordings of old	L Dec 6
Safety in finding shorts	L Aug 6
Satellite, ABC, proposed	May 54

MODULATION

Overmodulation, FM	Feb 14
—correction	L Jul 6
Percentage of, FM, determining	Feb 15
—FCC method	Feb 44

MONITORS

Audio	E Apr 65
EBS, for	L Jun 6
Proof-of-performance, small budget, equipment for	Jun 16
Stereo and multiplex, new rules for	W Jul 33



Don Ellington has a stubborn streak. Try to set up a shipping schedule on an upcoming Memorex video tape product before Don has given it his okay. Can't be done. Not with any number of previous approvals — from lab performance trials, field tests or production line checks. Don's job is to make sure, beyond all doubt, that when you screen a reel of a new Memorex video tape, it will look as good on the monitor as it does on paper. It's no job for a yes-man.

MEMOREX
Precision Magnetic Products

Santa Clara, Calif. Branch Offices in Boston, New York, Philadelphia, Washington, Atlanta, Orlando, Dayton, Chicago, Detroit, St. Louis, Dallas, Denver, Los Angeles, San Francisco, Honolulu.
Offices and Affiliates in London, Cologne, and Paris. Distributors in Japan, Canada, India, Australia, and New Zealand.

Circle Item 9 on Tech Data Card

Video, adjustment and calibrationMay 66

PADS

Combining/splitting, audioSep 16
Transmission set, fixed
T-pad (corrections)L Aug 6

PROOF OF PERFORMANCE

Audio, inexpensive equipment
forJun 16
ITFS systemsDec 22
Transmission set
—direct readingMar 31
—fixed T-pad (correction).....L Aug 6
Transmitter
—ITFSDec 24
—TV (corrections)L Jan 6

PROPAGATION

AM frequency, findingAug 12
C/N ratio, 2500-MHz systems.....Nov 21
Curves, new, for FM and TV.....Feb 37
Fading, 2500-MHz systems.....Nov 21
Field strength, FM,
predictingAug 30
Fresnel-zone clearancesOct 36
Level, signal, 2500-MHz.....Oct 38
Polarization, use of, to reduce
InterferenceDec 18
Presunrise power reduction.....Jul 15
Repeaters
—active, C/N ratios with.....Dec 19
—STL, passiveMay 13
Signal variationsAug 16

RADIO

Micronesia, broadcasting in.....Apr 19
FM-SW SimulcastsN Sep 58
KCSM broadcast centerMay 28
Shows, recordings of old.....L Dec 6
Studios, WTMJDec 14

RECORDING, AUDIO

Angle, vertical cuttingNov 37
Cartridges, pickupNov 36
Equalization, cartridge
preamplifierNov 37
Distortion, disc playback,
reducingNov 36
Pressure, stylusNov 37
Records, testNov 37
Tracking, playbackNov 36
Turntables
—care and testing of.....Jan 20
—requirements for playback.....Nov 54

RELAYS

Turntable switches, for.....E May 68

REMOTE PICKUP

Amplifier, redundantNov 18
PA output, from.....E Oct 53

SAFETY

Gradient, voltage, dangerous.....Dec 28
Towers, nearDec 26

SEMICONDUCTOR APPLICATIONS

Audio equipment, servicing.....Jul 18
—correctionSep 6
.....Oct 6
Diodes replace 6H6 and 6AL5.....E Dec 41
Voltage surges, diode change
to protect cartridge machines

fromE Dec 36

SPECIFICATIONS AND STANDARDS

CATV, FCC Regulations for.....Jun 32
HertzMay 34
National Electrical CodeNov 40
Towers, marking and lighting.....Mar 26
.....Apr 21
US-Mexico AgreementJul 21
Vertical-interval test signals.....Aug 20

STL

Passive-repeaterMay 13
TV, for AM and FM use.....W Oct 56

SWITCHING EQUIPMENT

Audio
—modifications toE Aug 42
—patch panelsApr 25
Function switch repair.....E Jul 40

TAPE CARTRIDGE EQUIPMENT & OPERATION

Automatic, cuing for play-
back (corrections)L Jan 46
Modification to ATC units.....E Feb 50
.....E Jun 56
Voltage surges, protection
fromE Dec 36

TELEPHONE LINES

Checker forE Dec 40
Modification toE Jun 58

TELEVISION

Antenna
—mountain topNov 34
—movement for maximum wind
loadDec 24
—positioningDec 22
Automation for station breaks.....Feb 11
Beam tilting for ITFS.....Nov 26
Beamwidth, vertical, require-
ments for ITFSNov 23
Cameras, color, live.....Oct 11
Channels, sharing with land
mobileW Dec 32
Chopper, solid-state,
revisitedOct 48
C/N
—measurements, ITFSDec 24
—ratiosNov 21
—combiningDec 19
Equipment, ITFS, selection.....Dec 20
ERP, computationNov 23
Fading, 2500-MHz systems.....Nov 21
FM interference toW Mar 93
Football, broadcasting in
colorMar 16
Installation, ITFS systems.....Dec 22
KCSM broadcast centerMay 26
Lighting
—color show, forJun 24
—quartz-iodineJan 14
—WTMJ, atDec 16
Measurements on ITFS systems.....Dec 22
Mobile services, test of
channel sharing withW Aug 35
Polarization, to reduce
interferenceDec 18
Program form, newW Dec 31
Proof-of-performance,
transmitter (corrections).....L Jan 6
Pulse-cross display, inter-
pretingMay 16
Quality, video, measurement.....Oct 44

Repeaters, active, C/N
ratios withDec 19
Satellite TV relay, way
opened forW Sep 54
STL, passive repeaterMay 13
Studio, round, WTMJDec 14
Subscription, FCC inquiry.....W May 53
Switcher, computer controlled.....Dec 14
Systems, 2500-MHzSep 13
Test signals, vertical interval.....Aug 20
—correctionsNov 34
Translator Rules relaxed.....W Oct 56
VSWR in ITFS systems.....Dec 22

TEST EQUIPMENT & INSTRUMENTS

Camera, inexpensive waveform.....Aug 24
Frequency, measurementMay 34
Generator, sine/square-wave.....E Nov 48
Impedance measurement, com-
parisonE Jul 42
Insulation tester, use of.....L Aug 6
Kits, audio proof-of-
performanceJun 16
Maintenance, forApr 26
Measuring video quality, for.....Oct 44
Oscilloscopes, neutralizing
withE Apr 65
Proof-of-performance, audio,
small-budget equipment for.....Jun 16
Vertical-interval test signals.....Aug 20
—correctionsNov 34

TOOLS

Maintenance shopApr 25

TOWERS

Beacon-flasher repair, emer-
gencyE Jun 54
Grounding for lightningNov 11
.....Dec 26
Marking and lighting.....Mar 26
.....Apr 21
Lights, monitor for remote
indicationE Dec 40

TRANSLATORS

FM, experimental tests
authorizedW Jul 34
Maximum power waiver.....W Mar 94
Rules relaxedW Oct 56

TRANSMITTERS

FM
—excitersApr 15
—designApr 15
—manufacturersApr 17
—power ratingsApr 17
ITFS, selection for.....Dec 20
NeutralizationE Jan 44
—scope, withE Apr 65
Proof-of-performance, ITFS.....Dec 24
Visibility ofW Jan 26

VIDEO EQUIPMENT

Chopper, solid-state,
modifications toE Jan 48
.....Oct 48
GroundingFeb 22

VIDEO MEASUREMENTS

Pulse-cross display, inter-
pretingMay 16

WIRING

Patch PanelsApr 25
Towers, NEC applications.....Mar 92



D-150 is a professional omni-directional microphone with high sensitivity and linear full-range response. It is ruggedly designed for hard use, and is attractive and inconspicuous because of its unusually small diameter. For public address, studio and on-location recording . . .

TECHNICAL DATA

Frequency range	30-20,000 cps.
Frequency response	± 3 db
Directional characteristics	Omni-directional
Sensitivity	- 55 db
Impedance	200 ohm
Connections	Cannon XLR
Dimensions	5 $\frac{3}{4}$ " long x $\frac{5}{8}$ " diameter
Weight	4 ounces

The remarkably small diameter of the capsule used in both these microphones has been developed without sacrifice of the sensitivity characteristics found in our finest professional dynamic microphones. This is another significant development from the research laboratories of AKG.

Send today for data sheets and prices.



D-109 is an attractively styled Lavalier microphone . . . a smart, practical choice for inconspicuous use. Among other features—simple raising or lowering of the Lavalier attachment cleverly attenuates the frequency response curve to specific applications.

TECHNICAL DATA

Frequency range	50-15,000 cps.
Directional characteristics	Omni-directional
Sensitivity	- 56 db
Impedance	200 ohm
Dimensions	2 $\frac{3}{4}$ " long x $\frac{5}{8}$ " diameter
Weight	1 $\frac{1}{2}$ ounces

MADE IN AUSTRIA BY AKG GMBH.



NORTH AMERICAN PHILIPS COMPANY, INC.
Professional Products Division, 100 East 42nd St., New York, N. Y. 10017

YOU WON'T FIND A PANIC BUTTON ON A MAGNECORD!




When Magnecord engineered a long list of safety factors into their professional line of tape recorder/reproducers . . . they engineered the emergencies out! A sturdy die-cast mainplate, supporting the transport in every model, insures precise location of internal parts under the roughest operating conditions. Rigid die-cast head mounts eliminate alignment problems. Professional quality hysteresis synchronous

capstan motor and individual reel drive motors are heavy duty models, and the capstan shaft assembly is re-inforced for extra strength and longer life.

While you are taping, safe-guard operating features protect your thinnest tapes. With Magnecord you get top-notch performance and superb fidelity to keep your taping facility operating at maximum capacity, even after years of constant use. Ask a broadcaster who uses one . . . Magnecords are built to take it!

Write now for the full story on the complete line of durable quality Magnecord tape instruments.

Magnecord 8+ Reels now available from Audiotape®. See your local dealer.



MAGNECORD MODEL 1021

Fully transistorized professional tape recorder/reproducer for monaural operation. For use in main or production control room.



MAGNECORD MODEL 1022

Fully transistorized professional tape recorder/reproducer two channel (stereo) for use in main or production control room.



MAGNECORD MODEL 1028

Professional quality 2 channel (stereo) tape recorder/reproducer for recording master tapes. (10½" reel capacity) Available in ½- or ¼-track.



MAGNECORD MODEL 1048

Professional 2 channel (stereo) recorder/reproducer for use in main studio, production studio or conference recording. (10½" reel capacity) Model 1048 is available in ½- or ¼-track.



Magnecord

® DIVISION OF THE
TELEX CORPORATION

P. O. Box 1526 / Tulsa, Oklahoma 74101

MANUFACTURER OF TELEX HEADSETS
AND OTHER FINE ACOUSTIC DEVICES

January 1967

We interrupt this magazine to bring you. . .

Late Bulletin from Washington

by Howard T. Head

Government Enters Dispute Over CATV vs. Rooftop Antennas

By a 4 to 3 vote, the FCC has denied a request by the Springfield (Massachusetts) TV Broadcasting Corporation for the issuance of a cease-and-desist order against a CATV operator in Ware, Massachusetts. The broadcasting firm had complained that the CATV operator, in its advertising for new customers, was offering a reduction in CATV installation costs if the subscriber would consent to removal of the rooftop antenna. In denying the request, the Commission emphasized that its refusal to issue an order did not constitute approval of this practice, but rather reflected its view that promotional activities of this nature were outside the scope of its authority. However, the FCC has referred the complaint to the Federal Trade Commission, which does have jurisdiction over matters of this nature, for whatever action the FTC may deem appropriate.

Commissioners Robert E. Lee, UHF's strongest supporter; Kenneth E. Cox; and Nicholas Johnson dissented.

Proposed Educational FM Changes

The Commission has proposed numerous changes in its Rules governing the allocation and operation of noncommercial educational FM broadcast stations. At present, these stations, which operate on FM Channels 201-220 inclusive (88 MHz - 92 MHz), are assigned on the basis of allocation standards much more flexible than those governing commercial FM stations. The Commission now proposes to establish three classes of educational FM stations -- Class A, B, and C -- corresponding to the classes of commercial FM stations. Existing 10-watt educational FM stations would be required either to conform to minimum Class A facilities, or to surrender their licenses.

Also proposed is a Table of Assignments which would make advance provision for educational FM channels in cities of various sizes. These would range from a single channel for cities with population under 50,000, to five channels for cities having a population of one million or more.

The Commission's Notice also expresses concern over interference to the reception of television Channel 6 (82 MHz - 88 MHz) from the operation of educational FM stations in the lower part of the band. Although the proposal contemplates protecting regular television broadcast stations on Channel 6 from FM interference, Channel 6 television translators would not be given such protection.

Land Mobile Services Continue to Seek Additional Frequencies

Pressures continue to mount from various land-mobile radio service users for additional frequency assignments. Proposals under consideration range from tests of sharing VHF television channels (see December 1966 Bulletin) to the

outright re-allocation of one or more television channels; the lower UHF channels appear to be most vulnerable in the latter regard.

In a recent Department of Commerce report, the Department's Telecommunications Science Panel has reviewed the increasing spectrum congestion, and proposed the establishment of a long-range program to review present technology and spectrum allocation, and to make plans for the future. A new organization, with an annual budget ranging somewhere between \$10 and \$50 million dollars, would be set up within the Commerce Department. In a counter-proposal, the FCC, with the tacit support of the White House Director of Telecommunications Management, has proposed a more modest study program (annual budget only \$2 million) to be undertaken by the Commission.

Decision on Propagation Curve Case Expected Shortly

The Commission is expected to decide shortly whether to amend the curves of field strength vs. distance now contained in the Commission's Rules for FM and television broadcasting (see June 1966 Bulletin). Although there is general agreement that the present UHF television curves are in substantial need of revision, most engineers believe that new FM and VHF television curves proposed by the Commission differ so little from previous curves that a change would be unwarranted. Some engineers have insisted that the proposed new VHF curves are a poorer fit to the data than the present ones.

Consulting engineers have also supported a proposal made to the Commission by the licensee of a UHF television station in Ohio for a change in the Rules governing the calculation of distances to contours. The present Rules require that these distances be calculated not on the basis of radiation toward the contour, but instead using radiation in the horizontal plane, which in most instances is well above the surface of the earth. The consequence of this Rule has been that stations employing very high antenna gains and beam tilt, with narrow vertical beams tilted as much as 2° below the horizontal plane (principally UHF stations), find themselves obliged to calculate contour distances on the basis of effective radiated powers only a fraction of the actual maximum power. The proposed change in this Rule, together with new field-strength curves, would bring about considerable improvement in the accuracy of contour prediction for UHF stations.

Short Circuits

The Commission has recognized the term "Hertz" as a synonym for "cycles per second"; the new usage is not mandatory, but Hz and c/s may now be used interchangeably . . . The Commission has removed all FM and television channel assignments from the "radio quiet zone," an area of approximately 4,000 square miles in Virginia and West Virginia centered roughly on two radio telescopes at Sugar Grove and Green Bank, West Virginia -- only exceptions were a television station already operating on Channel 3, and a special educational television station with a highly directional antenna on Channel 51 . . . The Commission has made final its proposal to relax the Rules for the identification of television auxiliary stations (see December 1965 Bulletin). . . The Commission has refused to waive its carrier-current Rules to permit radiation in excess of the carrier-current requirements along a Pennsylvania highway in a proposal to provide traffic and scenic information.

Howard T. Head . . . in Washington

BOOK REVIEW

Basic Electricity for Electronics; Robert G. Middleton and Milton Goldstein; Holt, Rinehart and Winston, Inc., New York, 1966; 694 pages, 6" x 9", hard cover; \$9.95.

The authors have produced an instructive text which ranges from electrons and electricity, to electrical laws, circuits analysis, magnetism, reactance, meters, tubes, semiconductors, filters, and network theorems. Extensive appendixes, a bibliography, answers to the problems, and an index complete the book.

Numbered headings identify major topics in the text, and a chart-type summary and questions conclude each chapter. The book is adequately illustrated with line drawings, charts, graphs, schematic diagrams, and photographs.

If he studies this book thoroughly, the reader should be rewarded with a good understanding of basic electricity as it applies to electronics. The coverage of mathematics is not extensive; basic algebra will suffice for all computations.

TV ENGINEERING PLACEMENT ALL EMPLOYER PAID FEES

CHECK AREA OF INTEREST

Director of Eng. ☐
Xmtr supervisor ☐
Video tape technician ☐
Studio supervisor ☐
Xmtr technician ☐
Studio technician ☐
Allied fields ☐
Other ☐

Name

Address

Salary Desired



RADIO-TV
EMPLOYMENT AGENCY Call: AC 312/337-7075

645 N. Michigan Ave. Chicago, Ill. 60611

PLEASE INCLUDE A RESUME

FROM YOUR CARTRIDGES



**JOA gives you MORE
CARTRIDGE PERFORMANCE
... that's practical!
MORE ENGINEERING TIME
... that's economical!**

Let JOA Cartridge Specialists recondition and rebuild your worn cartridges and keep your engineering personnel "engineering."

—JOA will inspect, service and reload your cartridges with ANY LENGTH tape

NO MINIMUM

NO EXTRA CHARGE FOR—

(a) FOAM TEFLON-FACED PRESSURE PADS

(b) replacement of minor parts

(c) VISIBLE SPLICE

**ALL cartridges PRETESTED under actual broadcast conditions
48-hour Processing**

Need NEW CARTRIDGES fast? JOA will ship immediately . . . from stock . . . any size Fidelipac, precision manufactured NAB cartridge.


**JOA—the cartridge service of authority—serving the broadcast industry.
phone or write**



Cartridge Service
P. O. Box 3087
Philadelphia, Pa. 19150
Area Code 215, TUrner 6-7993

Circle Item 13 on Tech Data Card

SERIES 700 BY TAPECASTER

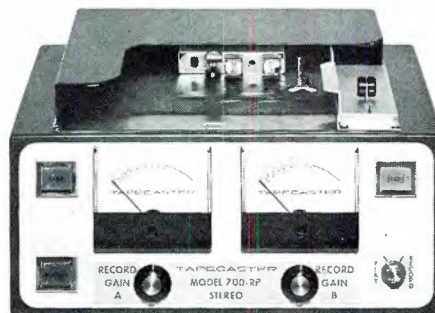

COMPARE TAPECASTER WITH ANY OTHER CARTRIDGE MACHINE ON THE MARKET.

COMPARE **SPECIFICATIONS**
PERFORMANCE
QUALITY AND WORKMANSHIP


ONLY TAPECASTER OFFERS ALL SILICON SOLID STATE DESIGN

TAPECASTER ELECTRONICS

Box 662, 12326 Wilkins Avenue
Rockville, Maryland 20851, Area Code 301 942-6666

Circle Item 12 on Tech Data Card

Model AA-200

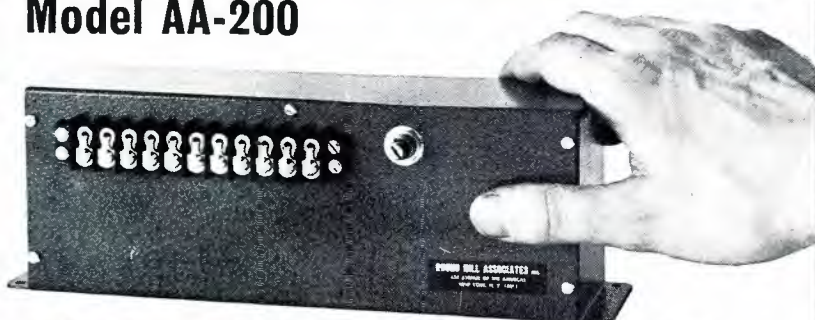

SOLID STATE AUDIO AMPLIFIER

Frequency Response:

±1db, 20 to 20,000 cycles at 100MW

±2db, 20 to 35,000 cycles at 100MW

Harmonic Distortion:

Less than 1%, 20 to 20,000 cycles at 100MW

Less than 2%, 20 to 20,000 cycles at 200MW

Input:

50 to 150 ohms balanced (mu metal shielded, permalloy core transformer)

2,000 or 100,000 ohms unbalanced

Gain:

70db, 50 ohm input, 8 ohm load

65db, 2,000 ohm input, 8 ohm load

Output: 500 and 8 ohms

(grain oriented transformer)

Circuit: 7 transistors, 1 thermistor

Controls: Locking volume control

Connections: Barrier strip

Power Supply: 9 volts DC, 100 MA
(accessory power supply available — Round Hill Model PS-200)

Construction: Brown enameled steel case

Size: 9"L x 2 3/4"W x 3 1/4"H

Weight: 28 ounces

Price: **\$34⁵⁰** Including complete Technical Data and Schematic
Send check or money order — we pay postage.

ROUND HILL ASSOCIATES INC.

A MILO ELECTRONICS SUBSIDIARY

434 Avenue of the Americas, New York, N. Y. 10011

Model PS-200



SOLID STATE POWER SUPPLY

An all-transistor general purpose power supply, the Round Hill Model PS-200 is particularly suited for use in applications requiring a stable, well-filtered DC source. It employs Zener referenced voltage regulation, and delivers 9 volts DC at loads up to 200 MA with complete dead short protection. A locking screwdriver-adjusted programming potentiometer permits the output voltage to be adjusted over a one-volt range.

Input Voltage: 105-125 volts AC,
60 cycles, 5 watts

Regulation: Line + load 5 MV

Ripple: Under full load 10 MV, peak to peak

Output Voltage: 9 volts DC

(adjustable over 1 volt)

Maximum Load Current: 200 MA

Controls: Locking programming control

Connections: Barrier strip

Construction: Brown enameled steel case

Size: 9"L x 2 3/4"W x 3 1/4"H

Weight: 44 ounces

Price: **\$24⁵⁰** Including complete Technical Data and Schematic
Send check or money order — we pay postage.

ROUND HILL ASSOCIATES INC.

A MILO ELECTRONICS SUBSIDIARY

434 Avenue of the Americas, New York, N. Y. 10011

Circle Item 17 on Tech Data Card

both studios are completely interchangeable, both electrically and physically, in the event of failure of either.

Conclusion

It is hoped that this article will aid the broadcaster planning an "open-line" program or one wishing to modify his facilities for this type of programming. The telephone equipment is a mutual project of the telephone company and the broadcaster. Careful analysis of needs by both should result in a flexible, functional, and reliable system. ▲

Editor's note: A new recorder connector, which supplies the filtered 1400-Hz beep in the caller direction only, has been developed especially for on-the-air applications for the Western Electric Company, and bears the part number KS-19645. It must be ordered through the local telephone company with the order number USOC-RCZ.

Give your tapes and mats a clean start!



New AE-100 Automatic Degausser erases 12" or less tape reel or up to 100 CUE-MAT* mats in 50 seconds.

The AE-100 is motor driven and completely automatic. It provides uniform, complete erasure for 1/4" tapes and mats without the guesswork of other degaussers. Shuts itself off automatically. Load it. Start it. Forget it.

What's more, the AE-100 is compact, lightweight, and practically priced. Ask your distributor or write Ampex Corporation, 401 Broadway, Redwood City, Calif. 94063.

*TM-Ampex Corporation

AMPEX

Circle Item 16 on Tech Data Card

BROADCAST ENGINEERING


How does this 7 FOOT MONSTER help solve your sound problems?

 The giant microphone shown here is the biggest microphone in captivity! The Model 643 is also the most directional microphone sold today. It helped E-V win the first Academy Award for microphone design in 22 years.

But beyond this, the 643 has been one of our most effective field research tools, offering a far-reaching insight into the nature of directional microphones, and their applications.

An obvious result of 643 research is our unique Model 642. Same E-V Cardiline™ principle*, but only 18 inches long. It reaches up to twice as far as any other broadcast unidirectional microphone to give you better long distance pickups than were dreamed possible a few years ago.

And this same basic research stimulated the development of our new Model 668 cardioid microphone. It uses the Continuously Variable-D® cardioid principle (a creative development from our exclusive Variable-D patent*) to provide smoother cardioid action—plus more versatility—than any other boom microphone you can use.

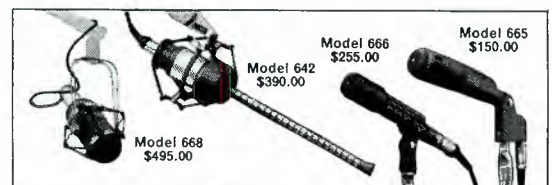

But let's not ignore the most popular professional cardioid microphone of all, the Model 666. Here's where the Variable-D principle got its start. And since the introduction of our seven foot laboratory, the 666—and its companion, the 665—has been further refined to offer better performance and value than ever before.

From such startling microphones as the 643, come continuing basic improvements—and the tools you need to solve your most difficult sound problems. Only E-V provides this kind of design leadership. E-V microphones in your studio will give you a big head start toward better sound. After all, we're at least seven feet ahead of everybody!

ELECTRO-VOICE, INC.

Dept. 171V, 638 Cecil St., Buchanan, Michigan

Electro-Voice
SETTING NEW STANDARDS IN SOUND

Circle Item 18 on Tech Data Card

8-Channel FAULT ALARM SYSTEM

- All solid state
- Single line operation
- Electronic commutator for simultaneous display
- Plug-in modules
- Write for technical bulletin #216 describing The MODEL SCS-1

MOSELEY
ASSOCIATES, INC.
135 NOGAL DRIVE
SANTA BARBARA, CALIFORNIA
(805) 967-0424

Circle Item 21 on Tech Data Card

Mounting and positioning equipment for cameras and space-age instruments



GENERAL PRECISION LABS Closed Circuit TV Camera on PS-34 Pedestal Stand with Model HD head. Model HD head features internal torsion spring to prevent camera dumping during extreme forward and backward tilts.

The PS-34 makes possible an infinite number of applications for mounting and positioning. It has "floating action," which means the actual weight of the camera is perfectly counterbalanced by a sturdy spring—just a touch and the camera automatically "floats" to the level you desire—stays there.

D & S offers the most complete line of stands and tripods. When standard models will not meet the requirement, we design and manufacture special tripods to order. Send us your specs.

For more information write: Dept.

DAVIS & SANFORD

24 Pleasant St., New Rochelle, N. Y.

Circle Item 20 on Tech Data Card

ESSA

(Continued from page 17)

through the lower atmosphere, or troposphere. Familiar examples of signals propagated by this means are TV and FM broadcasting.

The Laboratory's Consultation and Advisory Division is responsible for conducting and coordinating research and providing consultation on tropospheric propagation. As with the ionospheric research, an important aspect of the studies is prediction of transmission characteristics.

The research programs of this Laboratory include the following: The Tropospheric System Performance program area consists of studies of various modulation techniques and their effects on the performance of telecommunications systems. Optical Propagation and Laser Communications has as its purpose the evaluation of the optical-frequency portion of the spectrum for communications use. Data Reduction and Instrumentation provides specialized facilities to serve these functions. Electronic Interference Environment has to do with studying the characteristics and effects on communications of natural

and man-made noise and other extraneous signals. Millimeter Wave Propagation is concerned with how waves of these lengths are affected as they travel through the troposphere. Tropospheric Propagation Predictions is a program aimed at learning how to predict the effects of the troposphere on communications systems. Spectrum Utilization Research seeks efficient use of frequencies affected by the troposphere and the terrain. Radio Meteorology has as its purpose the determination of how propagation depends on meteorological phenomena. Tropospheric Physics deals with the effects of the troposphere on waves at frequencies of 300 MHz and above; it includes studies of tropospheric refraction and signal phase modulation caused by the propagation medium. Atmospheric Spectroscopy concerns properties of the atmosphere relative to the transmission and emission of radiant energy; special attention is given to the infrared frequencies.

Space Disturbances Laboratory

As space exploration increases, so does the need for better knowledge of conditions in space as they affect both safety and communica-

RCA is looking for a broadcast engineer who likes to write

We've an unusual opportunity for a broadcast engineer with a well-rounded technical background and the ability to write clearly, concisely, interestingly.

As associate editor of our house magazine, you will write about new broadcast products and the operation of equipment in TV stations. You'll interview station personnel, advise them on the preparation of manuscript and edit their copy. You will also work with our design and merchandising activities in the introduction and promotion of new products. Knowledge of sales promotion and printing production would be most helpful. This is a career position offering good starting salary and full range of benefits.


Please send a complete resume to:

Mr. C. F. Zangardi
RCA Broadcast and Communication
Products Division
Bldg. 3-2
Camden, New Jersey 08102



An Equal Opportunity Employer

not just color... COLOR

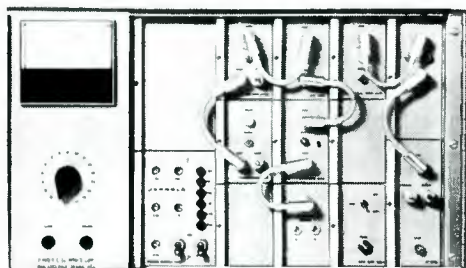

with new Jerrold 440 solid-state microwave

For your STL and other microwave applications, color transmission demands excellent differential phase and gain characteristics. New Jerrold 440 Solid-State Microwave, with differential phase of ± 0.25 degree and differential gain of ± 0.25 db, is the equipment to specify.

Compact, ultra-stable, with solid-state design and high-output klystron—the 440 Series by Jerrold is without a doubt the finest microwave gear available from any manufacturer at any price. We'll prove it—write today for complete technical data.

Features of Jerrold 440 (6-8 GHz)

1-watt (min.) transmitter output • Vapor-stabilized transmitter klystron • Frequency stability $\pm 0.005\%$ • Solid-state receiver and local oscillator • 12 MHz baseband, flat within ± 0.25 db • Individually self-contained power supplies • Modular construction throughout • Compact—only 10½ in. high.



**JERROLD
ELECTRONICS
CORPORATION**

Communications Systems Division
401 Walnut Street, Phila., Pa. 19106

Circle Item 22 on Tech Data Card

January, 1967

tions. Research is conducted by this Laboratory to establish the nature of space disturbances, with emphasis on those associated with solar activity.

A second program area is called Space Environment Forecasting Services. Short- and long-term forecasts are made of geomagnetic activity, solar flux, solar flare probability, and HF radio propagation conditions. In preparing the forecasts, much solar and geophysical information is collected and analyzed. Important information is disseminated periodically.

Aeronomy Laboratory

As was mentioned earlier, aeronomy is the science of the upper atmosphere, and the work of this Laboratory supports the activities of the Ionospheric Telecommunications and Space Disturbances Laboratories. Some of the program areas include Geomagnetism, Sun-Earth Relationships, Ionospheric Structure Studies, Ionospheric Direct Measurements (using rockets and satellites), Consult and Advisory (to provide technical information

and advice for government, industry, and universities), and Atmospheric Collision Processes. Still other areas are Instrumentation Research for Aeronomy, Laboratory Plasma Macroscopic, Ionosphere and Exosphere Studies by Scatter Radar, Equatorial Studies (of phenomena either existing only at or most easily studied near the magnetic equator), Upper Atmosphere and Space Physics, Optical Studies of the Airglow and Aurora, and Radio Transmission Properties of the Ionosphere and Exosphere. This impressive list gives some idea of the scope of the ITSA commitment to research.

ITSA Facilities and Resources

A scientific activity of the magnitude described here requires facilities and resources of comparable extent. These the ITSA has.

First is its staff of engineers, scientists, and supporting personnel. There are nearly 500 full-time and 100 part-time or temporary staff members. Over half of the full-time staff are professional personnel, and of this group about 13% have PhD



"DUAL RELIABLE" AM BROADCAST TRANSMITTERS



FOR STATIONS REQUIRING THE FOLLOWING FEATURES NOT AVAILABLE IN CCA STANDARD DELUXE TRANSMITTERS:

- BUILT-IN OPERATING STANDBY TRANSMITTER
- ANTICIPATED OFF AIR TIME — 5 SECONDS MAX.
- CONSTANT ELECTRONIC MONITORING SYSTEM
- AUTOMATIC SWITCHOVER TO HALF POWER
- ALL COMPONENTS — INCLUDING TUBES — OPERATE @ 50% RATING
 - 100% SPARE PARTS
- MINIMUM MAINTENANCE — 5 MINUTES PER WEEK
- 10,000 HOUR MINIMUM AVERAGE TUBE LIFE ANTICIPATED AT SUPER CONSERVATIVE OPERATION



Pictured on the left is the monitoring, combining and automatic switching cabinet of the CCA AM-5000DX, 5KW Dual Reliable Transmitter. This cabinet constantly monitors the audio and RF of two independent 2.5KW transmitters and combines their outputs to provide 5KW output. In the unlikely event of a fault, the defective transmitter will be instantly turned off and the second transmitter will automatically feed the antenna. This reduction to half power will have negligible effect on station coverage.

CONTACT CCA FOR DETAILS ON OUR "DUAL RELIABLE" AND DELUXE AM AND FM BROADCAST TRANSMITTERS.



CCA ELECTRONICS CORPORATION
GLOUCESTER CITY, NEW JERSEY
(609)-456-1716


"TRANSMITTERS ARE OUR BUSINESS"

Circle Item 23 on Tech Data Card

COLOR PROBLEMS?

These color processing accessories by TELEMET could solve most of your everyday color transmission problems—quickly and easily—during program time.

“ON AIR” ADJUSTMENTS

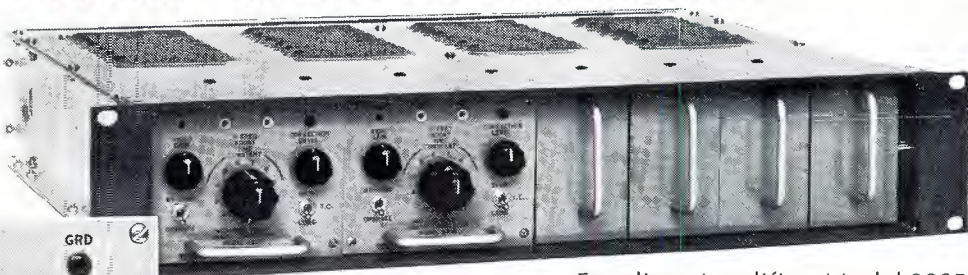

Equalizer Amplifier, Model 3205-B2



- STREAKING (tilt) positive or negative, low- and mid-frequency phase correction.
- BOOST chroma from program to program.
- EQUALIZE up to 2,000 feet of 75 ohm cable.
- PREVIEW and BYPASS facilities.

MATCH PHASE OF 3.58 MHz SUBCARRIER



3.58MHz Phase Shifter—DA, Model 3248-A1



- Four identical isolated outputs, phase adjustable 0° through 360° with respect to input.
- Four-volt peak-to-peak output.
- Coarse and fine phase adjustments.
- Built-in power supply.

Write for Complete Specifications



TELEMET COMPANY

185 DIXON AVENUE, AMITYVILLE, N.Y. • PHONE (516) 541-3600

Circle Item 24 on Tech Data Card

degrees. About twice that number have MS degrees. A number of graduate and undergraduate college students are employed on a part-time basis.

To finance the ITSA operations last year, some \$5.5 million was appropriated directly by Congress. Additionally, another 7 million (approximately) was transferred from other government agencies, such as the Department of Defense and NASA.

The majority of the ITSA's activities is centered in the main building of the Boulder, Colorado, Laboratories of the National Bureau of Standards. The NBS facility occupies a 217-acre campus donated to the federal government by the citizens of Boulder. Other Colorado facilities are the Table Mountain Field Site near Boulder, and the Fritz Peak Airglow Observatory near Rollinsville.

Not all research can be conducted in one locality, however, and the ITSA maintains field sites from Point Barrow to Antarctica; other sites throughout the world are op-


erated for the ITSA under contract. One of the world's largest radar antennas—covering 22 acres—is located at the Jicamarca Radar Observatory near Lima, Peru.

Conclusion

When one visits or reads about ESSA and the ITSA for the first time, it is difficult to comprehend the scope of the work that is being done. In talking to the ITSA scientists and engineers, however, one philosophy seems to stand out: The electromagnetic spectrum is a natural resource, and the efforts of these people are directed toward conservation of that resource.

Every ITSA project is related in some way to some form of electromagnetic communication. Part of this work potentially could have profound effects on broadcasting. These effects will not be felt tomorrow, perhaps not for years, perhaps never, but the necessary knowledge will be available for those who make decisions. Basically, that is the priceless product of ESSA—knowledge. ▲

For only \$550 your old Ampex 300/350 will be up-to-date in 1982 with new Lang Record/Playback Electronics!



**MODEL
LRP**

CHECK THESE ADVANCED FEATURES:

- ALL SOLID STATE • COMPATIBLE WITH EXISTING HEADS • LOW NOISE • HIGH RELIABILITY • FRONT PANEL SWITCHING OF MIC. AND LINE • RECORD ALIGNMENT CONTROLS ON FRONT PANEL • PLUG-IN CONSTRUCTION
- BUILT-IN MICROPHONE PREAMPLIFIER • HIGH OUTPUT RECORD ELECTRONICS • LOW DISTORTION LINE AMPLIFIER • SAFE/RECORD SWITCH • MONITOR JACKS • COMPACT SIZE.

FREQUENCY RESPONSE:

- ± 2 db 30-18 KHZ at 15 ips
- ± 2 db 50-15 KHZ at 7½ ips
- ± 2 db 50-7.5 KHZ at 3¾ ips

FOR COMPLETE DETAILS AND NEW LANG CATALOG WRITE...

LANG ELECTRONICS INC.
507 FIFTH AVENUE, NEW YORK, N.Y. 10017

For all your audio needs — LOOK TO LANG!

Circle Item 25 on Tech Data Card



Swabs are for babies; S-200 is for cleaning tape heads (even while tape is running)

If you've been cleaning tape heads with a twist of cotton on a toothpick—stop. Save time and do a better job with S-200 Magnetic Tape Head Cleaner. S-200 is a formulation of Freon TF® with other fluorocarbons in convenient aerosol cans. It thoroughly cleans tape heads, guides and helical scan slip rings in seconds, can be applied to running tape without interfering with

transmission. And heads stay clean longer. Users report over twice as many passes of tape between cleanings with S-200 than with swabs. S-200 Magnetic Tape Head Cleaner is recommended by leading tape manufacturers. Available in 6 and 16-oz. cans.

Write on letterhead for literature and free sample.

®Du Pont trademark



**miller-stephenson
chemical co., inc.**

Route 7, Danbury, Conn.

Circle Item 26 on Tech Data Card



Is there a swing to Norelco
Just ask these busy people
Better yet, ask the

Circle Item 27 on Tech Data Card

www.americanradiohistory.com



Scenes from North American Philips Company, Inc., Studio Equipment Division manufacturing facility, Mt. Vernon, N.Y.

3-tube Plumbicon* color cameras? who build them. people who are buying them.

Here's a partial list of stations now using the Norelco cameras. Ask them—at our expense—why they chose Norelco cameras. Call or write us. If you're in the market for a new color camera, we'll pay for your trip to one of these stations, subject of course to availability of their technical personnel to show and tell you the reasons for their choice.

STATION	EAST	LOCATION
WNHC-TV	New Haven, Conn.	
WNEW-TV	New York	
REEVES SOUND STUDIOS	New York	
SPORTS NETWORK	Rutherford, N.J.	
SOUTH		
WAGA-TV	Atlanta, Ga.	
WJBF-TV	Augusta, Ga.	
WCYB-TV	Bristol, Va./Tenn.	
WKRQ-TV	Mobile, Ala.	
WSPA-TV	Spartanburg, S.C.	
WBTV (Remote Unit)	Charlotte, N.C.	
MIDWEST		
WFIE-TV	Evansville, Ind.	
WFRV-TV	Green Bay, Wisc.	
WISH-TV	Indianapolis, Ind.	
WEST		
KABC-TV	Los Angeles, Cal.	
KTTV	Los Angeles, Cal.	
KXTV	Sacramento, Cal.	

Two major networks and dozens of stations now use Norelco 3-tube color cameras. Over a hundred of these "new generation" cameras are on the air today. And, just to keep up with orders, we've had to triple production personnel and quadruple the number of our factory test stations in less than a year.

Why the swing to Norelco 3-tube cameras? The big reason is superior performance through state-of-the-art innovations. *Item:* A sharper picture in both color and monochrome than with any 4-tube camera; Norelco's "contours out of green" system for both vertical and horizontal aperture correction provides that. *Item:* Lower noise, more detail in dark or shadowed areas with Norelco's superior gamma circuitry. *Item:* No lag because our beam split system is highly efficient; also, the light is split 3 ways, not 4. *Item:* Maximum stability and reliability because the Norelco 3-tube camera is inherently simpler (which also means fewer controls, less set-up time).

Briefly, that's why they're swinging to the Norelco camera. For technical details, call our sales representative, Visual Electronics. Or call us. Be a swinger.

Norelco STUDIO EQUIPMENT
DIVISION
NORTH AMERICAN PHILIPS COMPANY, INC.
900 South Columbus Avenue, Mount Vernon, New York 10550

NEWS OF THE INDUSTRY

AES

The annual awards banquet of the Audio Engineering Society was held in the Barbizon Plaza Hotel, New York, on October 13. The banquet climaxed the annual East Coast convention, at which records for attendance and number of papers read (104) were broken. Highlighted in the papers were endless-loop and reel-to-reel tape cartridges, tape recording, and reproduction.

The John H. Potts Memorial Award was given to John E. Volkman, RCA Laboratories, in recognition of "... his elegant application of acoustic principles in the development of large-scale loudspeakers and sound systems."

Lawrence J. Scully, president, Scully Recording Instruments Corp., received the Emil Berliner Award for "... his many contributions to the art of cutting disc records, especially improvements and innovations in precision lathes."

The Audio Engineering Society Award, reserved for the person who

has helped most in the advancement of the Society, went this year to Donald J. Plunkett, president of Fairchild Recording Equipment Corp., "... in recognition of time and effort contributed to problems large or small, national or local."

IEEE

A call for papers has been issued for the International Electronics Conference, sponsored by the Canadian Region of the IEEE. The Conference is to be held next September 25, 26, and 27 in the Automotive Building, Exhibition Park, Toronto. Nonmembers are welcome.

Twenty-minute papers on electronics and related subjects are sought. Deadlines are as follows: Title and 100-word abstract, including author name(s), company affiliation, and telephone number—March 15, 1967; a 500-word summary, or equivalent material suitable for reviewing the paper—March 15, 1967; for accepted papers only, a two-page digest of the paper—June 23, 1967.



YOU ONLY NEED THIS MUCH PANEL SPACE FOR TECH LAB'S NEW 1" VERTICAL ATTENUATOR

(actual size)

Here's the smallest vertical attenuator made in the U.S.A. ... another first from Tech Labs, pioneers in vertical attenuators since 1937.

It uses little panel space ... only 1" wide x 6" long. It provides quick change of levels on multiple mixers and assures long, noise-free life. Units are available in 20 or 30 steps with balanced or unbalanced ladder or "T", or potentiometer circuits. Standard Db per step is 1.5, others on order. Impedance ranges are 30 to 600 ohms on ladders or "T's" and up to 1 megohm on pots.

Don't wait, send for complete data today! **Need Video or Audio Rotary Attenuators?**

All Tech rotary attenuators are precision made for extended noise-free service. Many standard designs available and specials made to your specs. Send for literature today.



TECH LABORATORIES, INC.

Bergen & Edsall Bldgs., Palisades Park, N.J. 07650
Tel: 201-944-2221 • TWX: 510-230-9780

Circle Item 29 on Tech Data Card



SCA SOLID STATE RECEIVER

Dayton Electronic Products Company • 117 E. Helena St. • Dayton, Ohio 45404 • 513/461-4951

Circle Item 28 on Tech Data Card

BROADCAST ENGINEERING

Collins could sell FM transmitters for 20% less



BUT then they wouldn't be the best in the world

All Collins transmitters could be sold for less.

- Corners could be cut on transformers (narrowing safety margins for continuous operation).
- Less shielding could be used against spurious radiation (sacrificing some degree of stability).
- Standards on components, wiring, cabling and switches could be lowered.
- Collins' rigid testing could be bypassed.
- Meeting proper load conditions could be left to luck.
- Money devoted to research and development could be saved.
- Collins' 2-year warranty could be cut to the 1-year period of other manufacturers.

All these compromises could lower the price—as well as the *quality, performance* and *reliability* of the product—about 20%. But then Collins transmitters wouldn't be known for their careful engineering, conservatively-rated components, and precision manufacturing techniques.

Collins gives the broadcaster a discount in the form of quality and service. And that's worth a lot more than 20%.

For technical information on any FM transmitter ranging from 250w to 20kw, contact Collins Radio Company, Broadcast Communication Division, Dallas, Texas. Area Code 214, AD 5-9511.

COMMUNICATION / COMPUTATION / CONTROL



COLLINS RADIO COMPANY / DALLAS, TEXAS • CEDAR RAPIDS, IOWA • NEWPORT BEACH, CALIFORNIA • TORONTO, ONTARIO
Bangkok • Beirut • Frankfurt • Hong Kong • Kuala Lumpur • Los Angeles • London • Melbourne • Mexico City • New York • Paris • Rome • Washington • Wellington

Circle Item 30 on Tech Data Card

Advanced, Solid State

Spotmaster

Super B Series

MEETS OR EXCEEDS ALL NAB SPECIFICATIONS AND REQUIREMENTS




And Here's the New Economy King **COMPACT 400-A**



Don't let their low price fool you. New, solid state SPOTMASTER Compact 400's are second only to the Super B series in performance and features. Available in both playback and record-playback versions, these Compact models share the traditional SPOTMASTER emphasis on rugged dependability.

Top Quality Tape Cartridges



Superior SPOTMASTER tape cartridges are available in standard timings from 20 seconds to 31 minutes, with special lengths loaded on request. In addition, Broadcast Electronics offers a complete selection of blank cartridges, cartridges for delayed programming and heavy duty lubricated bulk tape. Prices are modest, with no minimum order required.

Introducing the Super B, today's truly superior cartridge tape equipment.

New Super B series has models to match every programming need—record-playback and playback-only, compact and rack-mount. Completely solid state, handsome Super B equipment features functional new styling and ease of operation, modular design, choice of 1, 2 or 3 automatic electronic cueing tones, separate record and play heads. A-B monitoring, biased cue recording, triple zener controlled power supply, transformer output . . . all adding up to pushbutton broadcasting at its finest.

Super B specs and performance equal or exceed NAB standards. Our ironclad one-year guarantee shows you how much we think of these great new machines.

Write, wire or call for complete details on these and other cartridge tape units (stereo, too) and accessories . . . from industry's largest, most comprehensive line, already serving more than 1,500 stations on six continents.



BROADCAST ELECTRONICS, INC.

8800 Brookville Rd., Silver Spring, Md.
Area Code 301 • JU 8-4983

Summaries and abstracts should be sent to:

Dr. Rudi de Buda
Technical Program Chairman
International Electronics Conference
1819 Yonge Street
Toronto 7, Canada

SMPTÉ

Color television broadcasting will be the subject of a technical conference to be held January 27 and 28 in the Rackham Memorial Building at the Engineering Society of Detroit. Major technical papers will be presented by representatives of networks, manufacturers, and broadcasters.

The Detroit Section (Michigan-Ohio) will be host for the conference, which is sponsored by the Detroit, Toronto, Rochester (N.Y.), and Chicago Sections of the Society in cooperation with the University of Michigan. Program chairman is Fred Remley, University of Michigan Center, Ann Arbor. Further information about the conference can be obtained from Howard W. Town, N.E.T., Inc., 2715 Packard Road, Ann Arbor, Michigan.

Specific areas of discussion are to be: colorimetry, color film reproduction, color video tape, color staging and lighting, color live camera operation, color remote production, and color film recording. A list of proposed papers follows.

Video Tape Recording Standards— —Why They Are Important to You —Charles Anderson

Specialized Techniques for Producing 35 mm Color Slides for Television —David Corley

Color Television Mobile Units — P. Corio and G. Hurtubise

Conversion of Television Plant System Facilities From Monochrome to Color—I. S. Rosner and N. Gorchoff

Color Conversion of Television Studio Facilities—N. R. Grover

Video Switching—Irv Moskowitz

Video Testing—George Petrilak

High Efficiency, High Intensity Luminaries for Color Television Lighting—S. F. Quinn


Engineering Economics of Color Conversion of VTR Machines—F. Rees and F. Bonvouloir

Color Film Reproduction—Canadian Telecasting Practices Committee, G. Robitaille

Contours-out-of-Green as Applied to a Color Camera System—Charles E. Spicer.

Color Fidelity in Camera Systems— Joseph F. Wiggin

THIS IS WHAT
QUALITY LOOKS LIKE.
OVER 40 TV STATIONS
IN THE U.S. KNOW HOW
IT PERFORMS

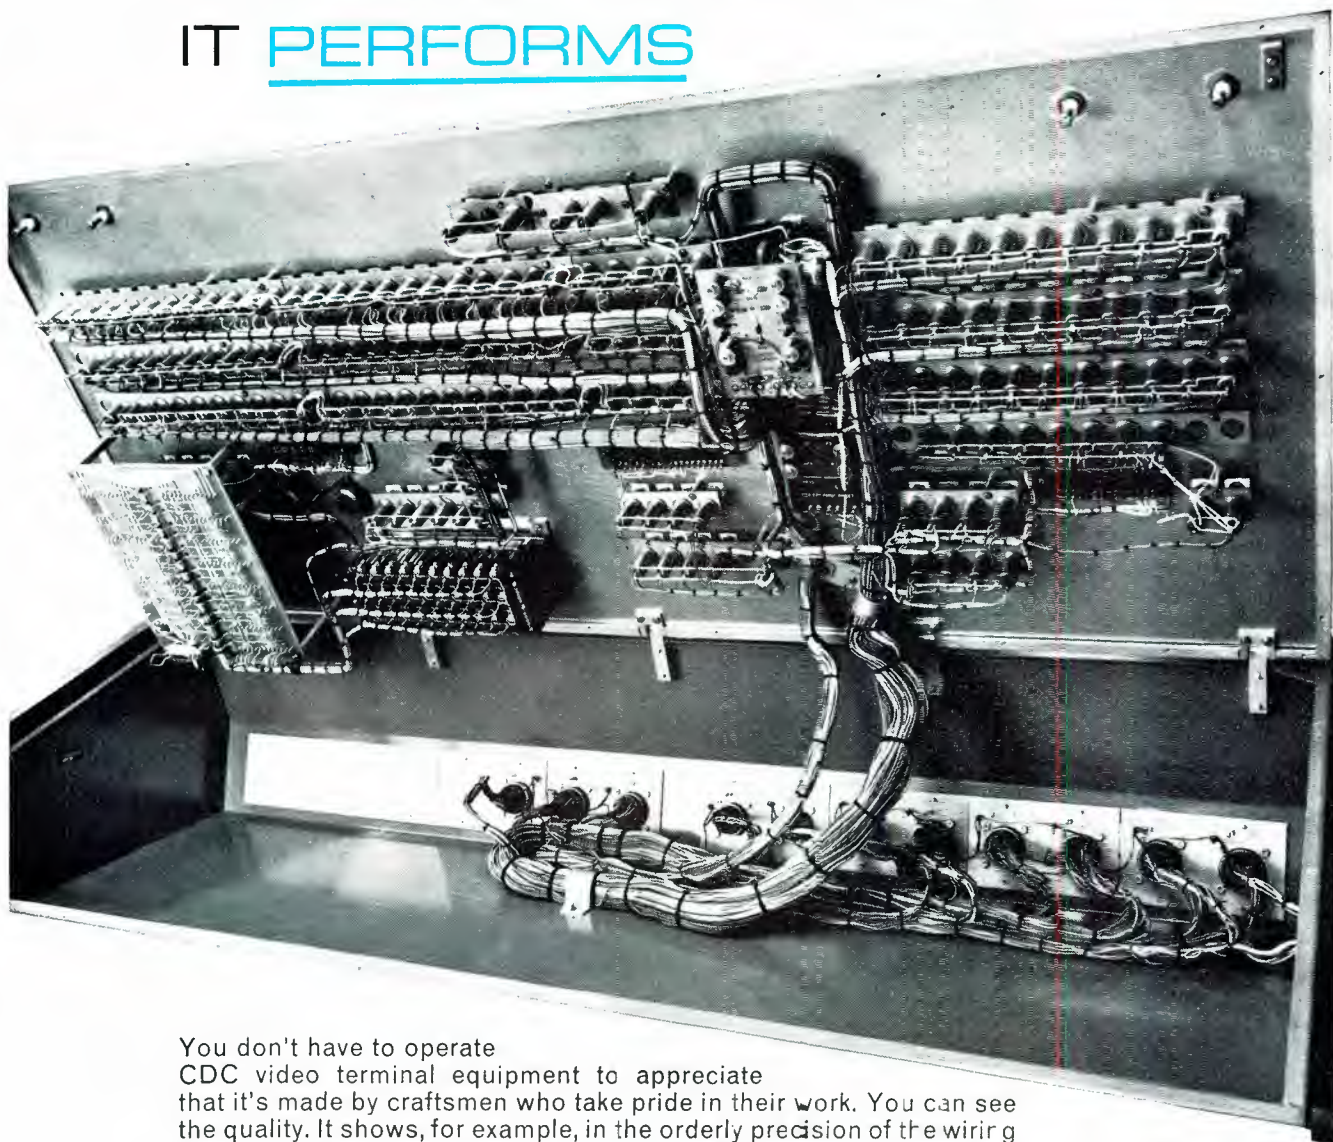

You don't have to operate CDC video terminal equipment to appreciate that it's made by craftsmen who take pride in their work. You can see the quality. It shows, for example, in the orderly precision of the wiring—a far cry from the usual helter-skelter tangle. Every piece of CDC equipment is a precise, skilled interpretation of the most sophisticated designs in the industry. Naturally, quality of product is reflected in quality of performance. CDC custom-designed equipment meets or exceeds the most stringent performance specifications.

CDC video terminal equipment is crafted in Canada, sold and serviced in the United States by our own people. Over 40 TV stations in the U.S. have installed it in the past year alone. Ask any one* of them how they feel about it. Then we're pretty sure you'll want to see us.

*Closest installation to your area supplied on request



CENTRAL DYNAMICS CORPORATION

HEAD OFFICE: 903 Main St., Cambridge, Mass. 02139

Circle Item 32 on Tech Data Card



Leadership
PERFORMANCE




MODEL SX 724

ELECTRONIC ADVANCES

- ⊞ Performance as yet unequalled
- ⊞ Two years proven Solid State circuitry
- ⊞ Extremely low noise electronics
- ⊞ Etched circuit modules

TRANSPORT ACHIEVEMENTS

- ⊞ Patented Electro-Magnetic Brakes never need adjusting
- ⊞ Complete head accessibility
- ⊞ Precision Construction
- ⊞ Low Wow and Accurate Timing

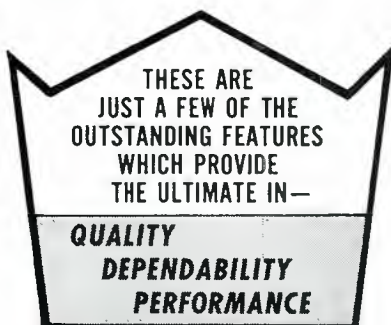

MODEL SS822

Write to Crown International
Box 1000, Dept. BE-1
Elkhart, Indiana 46514

MADE ONLY IN AMERICA

Circle Item 35 on Tech Data Card

NEW PRODUCTS

For further information about any item, circle the associated number on the Tech Data Card.



Color Pulse Generator
(50)

A color pulse generator, Model 314A, has been developed by **Video-metrics, Inc.** It produces the modulated 20T-pulse test signal for meas-


urement of luminance-chrominance gain ratio and envelope delay. It also produces a sine-squared T-pulse and window. The unit (top of photo) will operate in either a full-field or vertical-interval mode.

The color pulse test signal combines a modulated color subcarrier having sidebands of approximately 1/2 MHz with a low-frequency sine-squared pulse of 2.5 μ sec half-amplitude width. Gain or delay variations between low and high frequencies (luminance-chrominance) produce waveform distortions to the test signal which are observable and measurable using existing oscilloscopes.

The Model 314A generator is completely solid-state and contains its own regulated power supply. The unit measures 3 in x 8 in x 12 in and may be used as is, rack mounted in a 3 1/2-in high rack mounting frame, or mounted in a special carrying case. A companion EIA sync generator, Model 308 (center of photo), is available for portable or remote operation.

SPOTMASTER

RS-25



Tape Cartridge Racks

RM-100



... from industry's most comprehensive line of cartridge tape equipment.

Enjoy finger-tip convenience with RM-100 wall-mount wood racks. Store 100 cartridges in minimum space (modular construction permits table-top mounting as well); \$40.00 per rack. SPOTMASTER Lazy Susan revolving cartridge wire rack holds 200 cartridges. Price \$145.50. Extra rack sections available at \$12.90.

Write or wire for complete details.

Spotmaster
BROADCAST ELECTRONICS, INC.
8800 Brookville Road
Silver Spring, Maryland

Circle Item 34 on Tech Data Card

Unsurpassed!!!



NEW... LANG SOLID STATE PROGRAM EQUALIZER

Unsurpassed in design, performance and versatility, the new LANG SOLID STATE PROGRAM EQUALIZER PEQ-2 incorporates the finest features found in quality equalizers,

PLUS THESE EXCLUSIVE FEATURES...

- Eight low boost shelf frequencies • Four low droop shelf frequencies • Eight high boost peak frequencies • Six high droop shelf frequencies • Frequency select switches and equalization controls for all boost and droop functions • All controls and switches may be used simultaneously • Low frequency peak boost by use of boost and droop controls • Equalization "on" lamp indicates when equalization is taking place • Engraved stainless steel panel blends harmoniously with other equipment • Plug-in transistor amplifier and power supply cards • Compact size: 3 1/2"x19".

For complete details and new Lang Catalog write:

LANG ELECTRONICS INC.
507 FIFTH AVE., N.Y. 17
For all your audio needs — Look to Lang!

Circle Item 33 on Tech Data Card

BROADCAST ENGINEERING

IS YOUR VIDEO ON THE LEVEL?

Solid State Color STABilizing AMPlifier

with A.G.C. model VI-500



Ultra Stable Circuitry
through complete and accurate
temperature compensation

AUTOMATIC VIDEO LEVEL CONTROL

Maintains video peaks constant to a preset level, with reference to blanking.

CLAMPING

Sync tip clamps remove hum, tilt and other low frequency disturbances.

SYNC LEVEL

Sync level is maintained at a constant amplitude despite large variations in input.

EQUALIZATION

Accurately compensates for losses in up to 1000 feet of coaxial cable.

REMOTE CONTROLS

Automatic/Manual video gain
Sync Level
White Clip
Chroma Control
By-pass switch

WHITE CLIP

Adjustable sharp white clip remains fixed with respect to blanking.

CHROMA CONTROL

Chroma response continuously adjustable ± 4 db. from unity.

WHITE STRETCH

Stretch adjustments provide a high degree of flexibility to compensate for transmitter characteristics.

NON-COMPOSITE COLOR OUTPUT

Mono. or Color non composite output board in lieu of white stretch is available at additional cost.

APPLICATION

Wherever there is video and you want to assure:

- Constant levels • Constant clean sync • Elimination of tilt, hum and low frequency disturbances.

Price for the VI-500 \$1,750.00 Remote controls \$150.00 . . . Have you placed your order yet?

GOOD ENGINEERING IS VITAL



Write for complete information and specifications.

VITAL INDUSTRIES

3614 SOUTHWEST ARCHER ROAD
GAINESVILLE, FLORIDA—PHONE 372-7254

Circle Item 36 on Tech Data Card



New Solid State REMOTE AMPLIFIER Goes Anywhere

Here's a light weight solid state Remote Amplifier that's always ready to go! This 2 channel, 3 input amplifier weighs only six pounds. Operates over 30 hours on just two 9 volt transistor radio batteries. Built-in 1 KC oscillator. Head-phone jack and gain control.

Model RA-5

\$225, including carrying case & batteries

Optional AC Power Supply available at \$29.95




SPARTA ELECTRONIC CORPORATION


5851 Florin-Perkins Rd.
Sacramento, California 95828
Phone (916) 452-5353

Circle Item 38 on Tech Data Card


NEW FROM **EMCEE**



**1KW
TRANSLATOR**
UHF



**1KW
TRANSMITTER**
UHF



**1 WATT
TRANSISTORIZED
TRANSLATOR**
VHF ONLY

Send for full details . . . now

EMCEE

Electronics Missiles and Communications Inc.

160 EAST THIRD STREET, MT. VERNON, NEW YORK 10550

TELEPHONE: (914) 668-3012

Circle Item 37 on Tech Data Card



Small-Space Fader With Unbalanced Bridged-T Network

(51)

A flat-fronted stud fader designed for use on existing and new studio consoles in broadcasting and recording applications is being produced by **Painton** of England. Designated type FM-1, the unit occupies $\frac{3}{4}$ in. of panel width and extends $2\frac{5}{8}$ in. below the panel surface. Unbalanced bridged-T networks are in stock, and the first model offered has input and output impedances of 600 ohms. with a tapered attenuation in a maximum of 30 steps, plus off position. Cue lighting and switches are built in. External connection is made with a miniature plug and socket arrangement in the rear. Connector contacts are of the low-noise type, gold finished for reliability and long service.




Camera Pod

(52)

A lightweight camera pod is now

available from **Leopold Enterprises, Inc.** The unit, designed to free a cameraman's movements, includes a hand-adjusted device which tilts the camera 30° upward or downward, permitting the operator's back to remain upright.

Quick release for both the camera and the harness is included, and provision has been made for a built-in power supply. List price of the "Leo-Pod" is \$177.50.

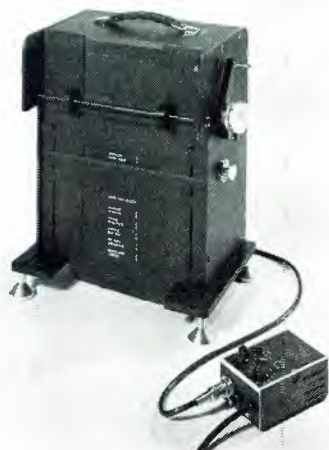

Moving Title Display

(53)

A new model of the Q-Tv "Graf-

ic" Q-Crawl eliminates polarity reversal and utilizes white-on-black typing. Stop frame action is optional. The unit can be used to present stock-market quotations, football scores, and other information in a vertical manner.

Transfer Recording Channel

(54)

Westrex, a division of **Litton Industries**, is now manufacturing a record-



NOW IS THE TIME TO BUY

Miratel
TRANSISTORIZED
MONITORS

DATED: DEC. 15, 1966


\$125⁰⁰

**TRADE IN...FOR ANY OLD
TUBE TYPE VIDEO MONITORS
ON THE NEW PROFESSIONAL
"TPB-SERIES" MONITORS**

One used tube-type set for one new monitor



MODELS
TPB14M and TPB17M

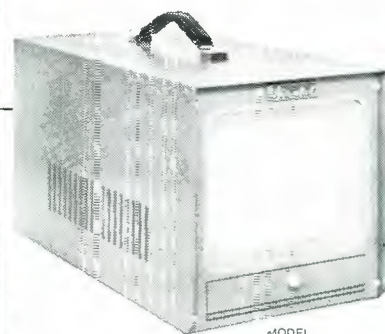

MODEL
TPB8M

DELIVERY FROM STOCK!

MIRATEL ELECTRONICS

- First with solid state monitors
- First with large screen solid state monitors — 14", 17", 23", 27"
- First with both professional and general purpose solid state transistor monitors
- More transistor monitors in use than all other monitor manufacturers

HURRY! OFFER GOOD FOR 90 DAYS! WRITE OR CALL COLLECT FOR DETAILS!

Miratel

3624 RICHARDSON STREET
NEW BRIGHTON
ST. PAUL, MINNESOTA 55112
(612) 633-1742



**YOU CAN GET MORE
FROM YOUR CARTRIDGES**



**JOA gives you MORE
CARTRIDGE PERFORMANCE
... that's practical!
MORE ENGINEERING TIME
... that's economical!**

Let JOA Cartridge Specialists recondition and rebuild your worn cartridges and keep your engineering personnel "engineering."

—JOA will inspect, service and re-load your cartridges with ANY LENGTH tape

NO MINIMUM

NO EXTRA CHARGE FOR—

- (a) FOAM TEFLON-FACED PRESSURE PADS
- (b) replacement of minor parts
- (c) VISIBLE SPLICE

ALL cartridges PRETESTED under actual broadcast conditions 48-hour Processing

Need NEW CARTRIDGES fast? JOA will ship immediately . . . from stock . . . any size Fidelipac, precision manufactured NAB cartridge.

JOA—the cartridge service of authority—serving the broadcast industry. phone or write



Cartridge Service
P. O. Box 3087
Philadelphia, Pa. 19150
Area Code 215, Turner 6-7993

Circle Item 39 on Tech Data Card

Circle Item 40 on Tech Data Card

KEEP TOMORROW'S NEEDS IN MIND TODAY WITH BELAR

ADD-ON MONITOR SYSTEM



The Belar ADD-ON MONITORING SYSTEM allows the broadcaster to fulfill his monitoring requirements as the needs arise. The basic unit is the FMM-1 Frequency and Modulation Monitor for monaural use, and when requirements call for SCA, add the plug in SCAM-1 SCA unit. And for stereo the FMS-1 Stereo unit completes the system.

Today's monitoring requirements make this system a must.

BELAR ELECTRONICS LAB.
Delaware & Montrose Avenues
Upper Darby, Pa. 19082

THE ADD-ON IS COMPLETE

Pilot Frequency
38 KC Suppression
L+R Crosstalk
L-R Crosstalk
AM Noise or Inc. AM

The FMS-1 monitors and measures:

Total Modulation
L+R Modulation
L-R Modulation
Pilot Amplitude
Left or Right Channel

A stereo station must—the Belar FMS-1 monitors the 19 KC pilot frequency as well as all the modulation characteristics of FM stereo. The advanced solid-state circuitry guarantees that all FCC performance requirements for stereo monitors are exceeded so that precise, accurate proof-of-performance measurements can be made for the finest in stereo broadcasting.

FCC TYPE APPROVED

ing channel built specifically to transfer the output of a high-quality magnetic tape reproducer to the company's 3D StereoDisk recorder. Known as the Westrex 2300, the new system consists of a stereo limiting amplifier with fast attack time, variable release time, and low distortion and noise; variable high-pass and low-pass filters; variable program equalizers; 20-step, 600-ohm balancing attenuator; 30-step, ganged recording attenuators; mono-stereo capability; and a complete monitoring and playback system.

Zoom Lens

(55)

A 10 x 9.5 Angenieux Zoom Lens for 16-mm motion picture cameras is now available from **Zoomar International, Inc.**

The new lens offers apertures from F/2.2 to F/22 and focal lengths 2.5 through 95 mm. This optic offers the advantage of short minimum focusing distances (29" from subject to film plane) and substantial depth of field, even at full aperture. When focused at the 29" minimum distance, objects only 22" from the film plane will be at the forward limit of the depth-of-field range.

Another valuable feature is the choice of either a 4:1 zoom crank or a new zoom lever. Models are also available with viewfinders.

Accelerated Film Service

(56)

Acme Film & Videotape Laboratories, Hollywood, has inaugurated an accelerated service in response to numerous requests for what amounts to "crash" delivery schedules. The extra-expedited service on transfers, dupes, and 16-mm prints is intended to cut days off normal lab delivery time. ▲



CUSTOM 12"
also available in
STANDARD 12" or 16"

No QRK Professional Turntable ever stands still...for long!

Each QRK is ruggedly built, tediously tested and timed to exceed N.A.B. Specs. Then it's guaranteed for one full year against any slip-up in material or manufacture. Despite all that, should something ever break, foul-up or wear out — a phone call to us will put the part on a plane same day. Don't settle for less. Install QRK.



See your dealer today or call or
write us for complete information.

QRK ELECTRONIC PRODUCTS
2125 N. Barton — Fresno, California

Engineers' TECH DATA

ANTENNAS & TRANSMISSION LINES

70. MOSELEY ASSOCIATES—Information describes Model ICU-2 isocoupler for mounting 150-172 MHz base-station antenna on standard broadcast tower.

AUDIO EQUIPMENT

71. ATLAS SOUND—Catalog 566-67 contains illustrations and descriptions of speakers, microphone stands, and accessories for commercial sound applications.
72. COLLINS—A 16-page brochure, "A New Approach to Audio Systems," concerns audio systems including stereo and mono speech consoles, audio control console, and mixer add-on unit.
73. HARTLEY PRODUCTS—Literature gives information on full-range 10-inch coaxial speaker for monitoring use.
74. MARANTZ—Sheet has data on solid-state power amplifier available as one-channel Model 14 and two-channel Model 15.
75. QUAM-NICHOLS—General Catalog No. 66 lists replacement speakers for sound systems, radio-TV, and other uses.
76. SPARTA—Product brochure includes prices of Sparta tape cartridge and audio console equipment.


COMPONENTS & MATERIALS

77. DIALIGHT—Catalog L-161F is a 16-page digest of information on incandescent and neon indicator lights.
78. INTERNATIONAL ELECTRONICS—Offer includes specifications and curves for Mullard 6076/QY5-3000A transmitting tube, and folder which lists complete IEC/Mullard special-purpose tube range including the 10M series.
79. MOSSMAN—Catalog 110-61 and supplementary data sheets contain specifications of push-button, lever, and turn switches.
80. SIGMA—Literature is concerned with heat-shrinkable protective coverings for sealing cable connections.
81. SPRAGUE—Short-form Catalog C-559 provides listing of electronic components for industrial, military, and commercial applications.
82. TEXWIPE—Leaflet includes sample "Foam-Swabs" for cleaning tape heads or other areas where noncontamination is essential.

MISCELLANEOUS

83. DENSON—32-page flier 966-A1 lists new, used, and surplus electronic equipment.
84. KEMLITE—Descriptive literature covers condenser-discharge flashtubes for photography, stroboscopy, laser and maser pumping, and other scientific applications.
85. MAGNE-TRONICS—Information relates to background music and motivational sound. Franchise and sale-promotion ideas are explained.
86. TEXAS ELECTRONICS—Specification sheets describe meteorological instruments for use by broadcast stations and CATV systems.

For a top job in broadcasting . . . get a
FIRST CLASS FCC LICENSE
...or your money back!

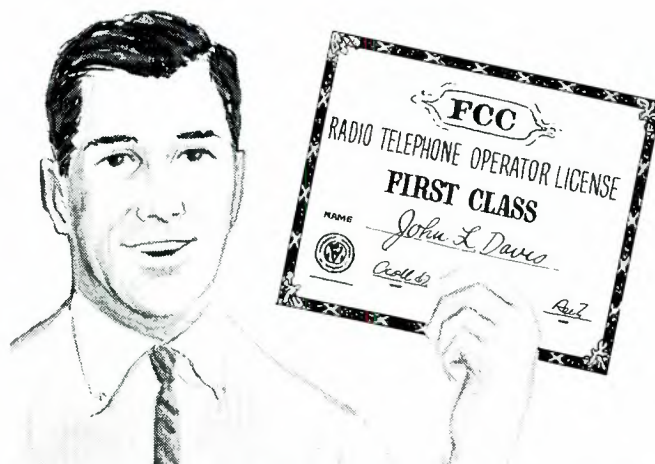

YOUR key to future success in electronics is a First-Class FCC License. It will permit you to operate and maintain transmitting equipment used in aviation, broadcasting, marine, microwave, mobile communications, or Citizens-Band. Cleveland Institute home study is the ideal way to get your FCC License. Here's why:

Our electronics course will *quickly* prepare you for a First-Class FCC License. Should you fail to pass the FCC examination after completing your course, you will get a *full refund* of all tuition payments. You get an FCC License . . . or your money back!

And only CIE offers you new, up-to-the-minute lessons in all these subjects: Logical Troubleshooting, Microminiaturization, Single Sideband Technique, Pulse Theory and Application, Boolean Algebra, and many more.

You owe it to yourself, your family, your future to get the complete details on our "proven effective" Cleveland Institute home study. Just send the coupon below for FREE book or write to Cleveland Institute of Electronics, 1776 E. 17th St., Dept. BE-34, Cleveland, Ohio 44114.

NEWS FOR VETERANS

New G. I. Bill may entitle you to Government-paid tuition for CIE courses if you had active duty in the Armed Forces after Jan. 31, 1955. Check box in coupon for complete information.



MAIL COUPON TODAY FOR FREE BOOK

CIE Cleveland Institute
of Electronics
1776 East 17th Street, Cleveland, Ohio 44114

Please send me your FREE book, "How To Get A Commercial FCC License."

Name _____ (please print)
Address _____
City _____ State _____ Zip _____
Occupation _____ Age _____

☐ Veterans check here for GI Bill information

Accredited Member National Home Study Council
A Leader in Electronics Training . . . since 1934

BE 34

EIMAC

Power Tube Applications Engineering Opportunities

Openings exist for qualified engineers to fill power tube marketing and applications engineering positions in the San Francisco Bay Area.

Positions require:

- 3-5 years experience in power tube engineering, electronic or radio equipment design, or broadcast engineering, and a desire to enter marketing at a high technical level.
- BSEE or equivalent degree.
- Sound technical background.

Responsibilities:

- Customer technical assistance with equipment design.
- Liaison between EIMAC and customer engineering staffs.
- New product planning and development of marketing programs.
- Technical and commercial support of field sales force.
- Negotiation of product requirements and specifications.
- Some travel in U.S. and Canada.

We feel that providing customers with applications engineering assistance, service, and personal attention is the best way to market our quality power grid tube products.

For further information call
Dick Reidburn (415) 592-1221
or send resume in confidence



EIMAC

301 Industrial Way, Department B
San Carlos, California 94070
An Equal Opportunity Employer, M & F

Circle Item 44 on Tech Data Card

MOBILE RADIO & COMMUNICATIONS

87. MOSLEY ELECTRONICS—1967 catalog lists line of Citizens-band antennas.

POWER DEVICES

88. HEVI-DUTY — Bulletin supplies data on line-voltage regulator using saturable-core reactor.

RECORDING & PLAYBACK EQUIPMENT

89. AMPEX—Eight-page brochure No. A063 describes features of solid-state AG-300 audio recorder for making master tapes. Brochure No. V008 contains information on portable VR-660 video tape recorder for broadcast and closed circuit television use.
90. AUDIO DEVICES — Audiodiscs® recording blanks, Audiotape® magnetic recording tape, and Audiopak® continuous-loop cartridges are subjects of literature.
91. GATES—Brochure illustrates and provides specifications on transcription turntables and accessories.
92. VIKING OF MINNEAPOLIS — Literature about Model 230 tape transport with RP120 amplifier is offered.

REFERENCE MATERIAL & SCHOOLS

93. CLEVELAND INSTITUTE OF ELECTRONICS—Pocket-size plastic "Electronics Data Guide" includes formulas and tables for: frequency vs wavelength, dB, length of antennas, and color code.
94. HAYDEN BOOKS—Catalog contains list of texts, professional books, and references for scientists, engineers, and students.

TEST & MEASURING EQUIPMENT

95. HEWLETT-PACKARD—Application Note AN 77-2 explains how a vector voltmeter can be used to make high-resolution frequency comparisons quickly.
96. SECO—New test-equipment folder features Model 107-C voltage-regulated tube tester.
97. TRIPLETT—Catalog No. D-66-1 shows line of panel meters, shunts, and portable instruments.
98. VITRO—Subjects of leaflet are Nems-Clarke phase monitors, spectrum display monitor, field-intensity meters, FM re-broadcast receiver, and RF and video jack panels.


TOOLS & SAFETY DEVICES

99. AIR SPACE DEVICES—Brochure STC5-65-10M illustrates applications of "SAF-T-CLIMB" for safety in climbing structures.

VIDEO EQUIPMENT

100. CLEVELAND ELECTRONICS — A 52-page quick-reference step-down die-cut catalog covers complete information on vidicon, Plumbicon®, and image-orthicon deflection components.
101. COLORADO VIDEO — Data sheet gives specifications and general description of Model 601-A laboratory sync generator.
102. GRANGER ASSOC.—Technical-data sheet contains information about infrared-sensitive TV system with 600-line vertical and horizontal resolution.
103. TELEVISION ZOOMAR—Literature describes Model 10x40C 10-to-1 zoom lens for image-orthicon cameras.
104. TROMPETER—Patching and delegate switching systems for broadcast and video distribution are covered in literature.
105. VITAL—Data sheets give specifications of Model VI-500 stabilizing amplifier, Model VI-10A video distributing amplifier, and Model VI-20 pulse-distribution amplifier.

SPOTMASTER

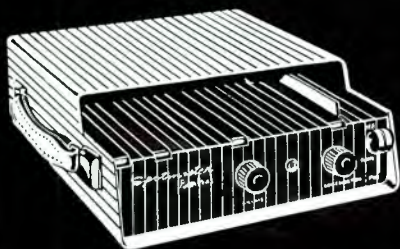

PortaPak I Cartridge Playback Unit

Your time salesmen will wonder how they ever got along without it! Completely self-contained and self-powered, PortaPak I offers wide-range response, low distortion, plays all sized cartridges anywhere and anytime. It's solid state for rugged dependability and low battery drain, and recharges overnight from standard 115v ac line. Packaged in handsome stainless steel with a hinged lid for easy maintenance, PortaPak I weighs just 11½ lbs. Vinyl carrying case optional. Write or wire for full information.



Spotmaster

BROADCAST ELECTRONICS, INC.
8800 Brookville Road
Silver Spring, Maryland

Circle Item 47 on Tech Data Card

ROHN®

Tall in the tower field

CATV • microwave • communications
• broadcast • home TV • amateur . . . whatever your needs, ROHN offers you these distinct advantages:
UNUSUAL STRENGTH . . . REMARKABLE DURABILITY . . . COMPLETE VERSATILITY . . . OUTSTANDING SERVICE . . . FUNCTIONAL DESIGN . . . ATTRACTIVE APPEARANCE

From computer-assisted engineering and design, through the quality controlled manufacturing processes — ROHN builds these advantages into all ROHN towers. ROHN also warehouses complete lines of towers, lighting, microwave reflectors and accessories and provides turnkey tower erection throughout the world.

Representation and Distribution Worldwide



ROHN® Home Office
P.O. Box 2000, Peoria, Illinois 61601
Ph. 309/637-8416 TWX 309/697-1488

Circle Item 46 on Tech Data Card

January, 1967

Advertisers' Index

Ampex	42
Belar Electronics Lab.	58
Broadcast Electronics, Inc.	52, 54, 61
CBS Laboratories, Div of CBS, Inc.	27
CCA Electronics Corp.	45
Central Dynamics Corp.	53
Cleveland Institute of Electronics	59
Cohu Electronics, Inc.	3
Collins Radio Co.	51
Crown International	54
Dayton Electronic Products Co.	50
Davis and Sanford	44
Eimac Div. of Varian Assoc.	60
Electronics, Missiles and Communica- tions, Inc.	56
Electro-Voice, Inc.	43
Fairchild Recording Equipment Corp.	8
Gates Radio Co.	10
International Nuclear Corp.	Cover 3
Jerrold Electronics Corp.	45
JOA Cartridge Service	39
Lang Electronics, Inc.	47, 54
Lenkurt Electric Co., Inc.	41
Magnecord, Div. of Telex Corp.	36
Memorex Corp.	33
Microwave Assoc.	5
Miller-Stephenson Chemical Co., Inc.	47
Miratel Electronics, Inc.	57
Moseley Assoc., Inc.	44
Norelco	35, 48, 49
QRK Electronic Products	58
RCA Broadcast & Communication Products Div.	19, 20
RCA Electronic Components & Devices	Cover 4
RCA	44
Riker Video Industries, Inc.	Cover 2
Rohn	61
Round Hill Assoc., Inc.	42
Rust Corp.	57
Sarkes Tarzian, Inc.	29
Shure Bros., Inc.	9
Sparta Electronic Corp.	56
Tapecaster Electronics	39
Tech Laboratories, Inc.	50
Telemet Co.	46
Texwipe Co.	40
Visual Electronics Corp.	6
Vital Industries	55
Ward Electronic Industries	7
Wilkinson Electronics, Inc.	61

Replace Mercury Vapor Tubes Directly with



WILKINSON Silicon Rectifier Stacks! Because...

- ☐ Only non-encapsulated WILKINSON Silicon Rectifiers can be repaired in seconds with low-cost replacement diodes!
- ☐ Exclusive "GO, NO GO" indicator automatically warns when the reverse leakage of any diode is in excess of 50 microamps.
- ☐ Only WILKINSON Silicon Rectifiers are available in a complete tube replacement range of from 866 to 857B.
- ☐ WILKINSON Silicon Rectifiers function in ambient temperatures of from — 85 F to +158 F.
- ☐ No more filament heat and consequent filament burnout . . . lower power cost and reduced hum, too.
- ☐ No warm up time is necessary . . . instantaneous operation!
- ☐ Just plug in WILKINSON Silicon Rectifiers . . . no re-wiring is necessary.
- ☐ Only WILKINSON Silicon Rectifiers are fully guaranteed and have a safety margin well in excess of tube rating.

For complete details write today to:

WILKINSON ELECTRONICS, INC.

1937 MACDADE BLVD. WOODLYN, PA. 19094
TELEPHONE (215) 874-5236 874-5237

Circle Item 45 on Tech Data Card

Professional Services

VIR JAMES
CONSULTING RADIO ENGINEERS
Applications and Field Engineering
345 Colorado Blvd.
Phone: (Area Code 303) 333-5562
DENVER, COLORADO 80206
Member AFCCE

JAMES C. McNARY
Consulting Engineer
National Press Bldg.

Washington 4, D. C.
Telephone District 7-1205
Member AFCCE

AMPEX HEAD ASSEMBLY RECONDITIONING SERVICE for all Ampex professional model recorders. This professional service features precision relapping of all heads for maximum head life. Your assembly is thoroughly cleaned and guides are replaced as required. Price includes optical and electrical inspection and complete testing on Ampex equipment in our plant. Full track or half track assemblies . . . \$35.00. One to two day service. "Loaner" assemblies available if necessary. LIPPS, INC., 1630 Euclid Street, Santa Monica, California 90404. (213) EX 3-0449. tf

VIDEO TAPE RECORDER AUDIO HEAD ASSEMBLY SERVICE

Precision relapping of all heads and supporting posts, including cleaning and testing. Ampex head assembly with "cue" tracks, \$75.00 complete. RCA units also relapped. One to two day service. LIPPS, INC., 1630 Euclid St., Santa Monica, Calif. 90404. (213) EX 3-0449. tf

Classified

Advertising rates in the Classified Section are ten cents per word. Minimum charge is \$2.00. Blind box number is 50 cents extra. Check or money order must be enclosed with ad.

The classified columns are not open to the advertising of any broadcast equipment or supplies regularly produced by manufacturers unless the equipment is used and no longer owned by the manufacturer. Display advertising must be purchased in such cases.

EQUIPMENT FOR SALE

CO-AXIAL CABLE Helix, Styroflex, Spiroline, etc. Also rigid and RG types in stock. New material. Write for list. Sierra-Western Electric Co., Willow and 24th Streets, Oakland, Calif. Phone 415 832-3527 5-66-tf

Television / Radio / communications gear of any type available. From a tower to a tube. Microwave, transmitters, cameras, studio equipment, mikes, etc. Advise your needs—offers. Electrofind Co., 440 Columbus Ave., NYC. 212-EN-25680. 8-64 tf

COMMERCIAL CRYSTALS and new or replacement crystals for RCA, Gates, W. E., Billey, and J-K holders; regrounding, repair, etc. BC-604 crystals; also service on AM monitors and H-P 335B FM monitors. Nationwide unsolicited testimonials praise our products and fast service. Eidson Electronic Company, Box 96, Temple, Texas. 5-64 tf

NEW QRK TURNTABLES, all models available, will take any equipment in trade, regardless age or condition. Audiovox, 4310 S.W. 75 Ave., Miami, Florida. 9-66-4t

OBSOLETE TUBES—80% discount — 6SD7, 7E6, 19V8, 1616, DF91, 6C8, 6J7, 6L7, 12K8, 14H7, 14R7. Large variety of other obsolete numbers. List free. H. Goldman, 28 Joseph, Bethpage, N.Y. 11714 10-66-6t

Trim 504 Audio Patch cords \$4.00. Audio jack panels for 19" racks, 10 pair \$8.95. Repeat coils 500-500 ohm flat to 20kc \$4.00 —Relay racks and equipment cabinets. Write for list. Gulf Electro Sales, Inc., 7031 Burkett, Houston, Texas. 4-66-tf

"AUDIO EQUIPMENT — Whatever your needs, check us first. New and used. Ampex, Altec, AKG, EV, Fairchild, Neumann, Langevin, Rek-O-Kut, Uher, Viking. Send for equipment list." Audio Distributors, Inc., 2342 S. Division Ave., Grand Rapids, Michigan 49507 6-66-6t

Audio Equipment bought, sold, traded. Ampex, Fairchild, Crown, McIntosh, Viking. F. T. C. Brewer Company, 2400 West Hayes Street, Pensacola, Florida. 3-64-tf

Everything in used broadcast equipment. Write for complete listings. Broadcast Equipment and Supply Co., Box 3141, Bristol, Tennessee. 11-64-tf

FREQUENCY MONITOR SERVICE for A.M. monitors including G.R., RCA, Gates, Doolittle, W. E., etc. Frequency change and other services. Reasonable prices, prompt service. Call or write before shipping. Eidson Electronic Co., Temple, Texas. 9-66-tf

RADIO AND TELEVISION STATIONS for sale in all parts of United States. Qualified buyers may receive further details by writing to Inter-Media Communications Corporation, 246 Fifth Avenue, New York, New York 10001. 1-67-12t

EMERGENCY POWER GENERATOR, International Harvest Model U-21, 30kw, 3-phase, 60 cycle. 90.4 amperes. 240 volts. Only slightly used. WKYN, Paducah, Kentucky. 10-67-1t

For Sale: Fairchild Stereo Conax for FM control of modulation. \$350. KPEN, 1001 California, San Francisco, California. 1-67-2t

EQUIPMENT WANTED

We need used 250, 500, 5K & 10K Watts AM Transmitters. No Junk. Broadcast Equipment and Supply Co. 1314 Iturbide St., Laredo, Texas 78040. 3-66-tf

EMPLOYMENT

FREE PLACEMENT for TV and Radio Chief Engineers and both studio and transmitter engineers. All fees paid by the station. Send resume to: Nationwide Broadcast Personnel Consultants, 645 North Michigan Avenue, Chicago, Illinois or call: 312-337-7075. 9-66-1t

Job Headquarters for all Radio and Television Engineers. Immediate openings exist in 9 western states and elsewhere for qualified engineer and technical personnel. All categories from trainees to experienced transmitter maintenance, chief, assistant chief, live color video maintenance and technical operations. Send us your complete resume now. The AMPS Agency, 3974 Wilshire Blvd., Los Angeles, California 90005. Telephone DU 8-3116. By Broadcasters — For Broadcasters 11-tf

WANTED: Technicians for RCA closed circuit television—systems planning — color television — video tape — TV cameras — maintenance — sales engineers etc. RCA representative, 143-08 94th Avenue, Jamaica, New York, 212-297-3336 9-66-tf

Prominent Hollywood independent film and general recording facility seeks crackjack engineer; small secured stock investment buys 10% interest for right man. Box 38027, Hollywood, California, 90038. 1-67-1t

PROJECT ENGINEERS

Project Engineers, all levels for challenging assignments in the design of audio, video & control facilities for color TV studios. BSEE and minimum of 2 years experience, preferably in broadcasting, required.

Location: CBS Headquarters Building, midtown Manhattan

Please send resume and salary requirements, to:

WILLIAM JR. REILLY, JR.
Personnel Dept.

COLUMBIA BROADCASTING SYSTEM, INC.

51 W 52 St., N.Y., N.Y. 10019
12-66-3t

TELEVISION ENGINEERS

We are interested in contacting Station Engineers capable of design or field engineering. Excellent opportunities in TV Development Engineering and Systems Engineering with Sarkes Tarzian, Inc., Broadcast Equipment Division.

TV station engineering experience required, BSEE or equivalent desirable. Send resume of experience, or call, Mr. Biagio Presti, Broadcast Equipment Division, Sarkes Tarzian, Inc., Bloomington, Indiana, Area Code 812, 332-7251.



Symbol of Excellence
in Electronics

SALES ENGINEER

A Canadian manufacturer of competitive, high quality, high performance Video Studio equipment has established a U.S. Subsidiary.

We seek experienced, capable and enterprising Sales Engineers for the United States Market.

Top financial rewards for the right men.

Please direct resumes and enquiries to: Mr. Paul Gyrsting, 403 Main St., Cambridge, Mass., U.S.A. or Telephone Collect: (617)—547-8826 (Cambridge), (514)—697-0810, (Montreal).



CENTRAL DYNAMICS CORPORATION



How to turn an ordinary color television set into a highly useful monitor for \$195.00.

Money-saving engineering ideas are what put International Nuclear in business. Pre-testing the ideas by in-station use is what guarantees you of the practicality of the ideas. Take the TVM2 Video Modulator pictured above, for example. This self-powered, printed circuit unit (completely transistorized) accepts

composite monochrome or color signals and feeds the signals into the IF circuit of any TV receiver, at a frequency of 45.75 megacycles. The TVM2 is simple to install.

If you're interested in saving money, spend \$195.00.

Write or wire or phone collect:
 Ray Weiland, President
INTERNATIONAL NUCLEAR CORPORATION
 608 Norris Avenue
 Nashville, Tennessee
 615 — 254-3365



Another big difference: the re-designed image section provides reduced distortion and freedom from "ghosts." These new tubes are available singly or as matched sets—a trio of 8673/S or 8674/S types for color service... types 8673 and 8674 for black and white. Main construction difference is in the target-to-mesh spacing. The closer-spaced 8673 enhances S/N ratio for quality performance under sufficient illumination. The 8674 has greater sensitivity under limited illumination. For complete information about the new RCA Bialkali Photocathode Image Orthicons, ask your RCA Broadcast Tube Distributor.



A vintage television set with a wooden cabinet. The screen shows a cartoon clown with a large red nose, wearing a top hat and a striped awning. The TV has a small control panel on the right side. The image is in black and white with a high-contrast, graphic style.

For black & white pick-up,
If you're now using . . . You can replace with:

7293A	
7293A/L	8674

**AVAILABLE FROM YOUR RCA
BROADCAST TUBE DISTRIBUTOR**