

12-5 578 1
TROY JONES
WVA INC
70LK ST
LEHURG VA 2450

BROADCAST **engineering**

April, 1976/75 cents


The VTR Revolution Continues

page 26



- *Small Market Workshop*
- *Transmitter Cures*
- *Sliding Into Accuracy*
- *Is U.S. TV Inferior?*

smart switcher

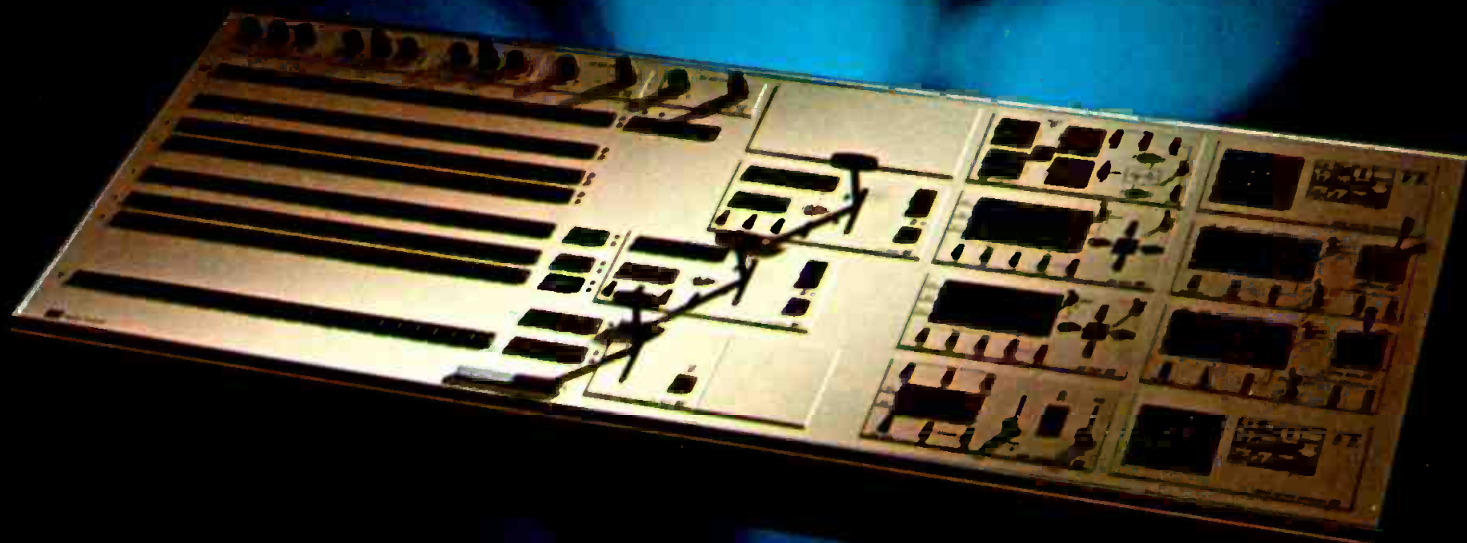

**CDL has just raised the standard
for video production switchers. Again.**

The CD-480 is the first totally new full scale production switcher from CDL in 7 years. It offers every wanted feature, from superb Chroma Keying to Rotating Wipes with Colored Borders and Soft Edges.

We applied unique technology to create an operator's "dream". A *single* CD-480 Effects Amplifier can perform production sequences that are not possible even on a conventional *triple* M/E switcher.

The CD-480 is not just a new switcher, but a completely modular production system.

Call us!

**CD-480
gives you the
competitive
advantage!**




CENTRAL DYNAMICS LTD

Canada: 147 Hymus Blvd., Montreal, Que. H9R 1G1 ■ 514-697-0811
U.S.A. 230 Livingston Street, Northvale, N.J. 07647 ■ 201-767-1300
Chicago: 312-991-4720 ■ Los Angeles: 213-789-0574

For More Details Circle (1) on Reply Card

www.americanradiohistory.com

Automated Processes created these NEW AUDIO AMPLIFIERS.

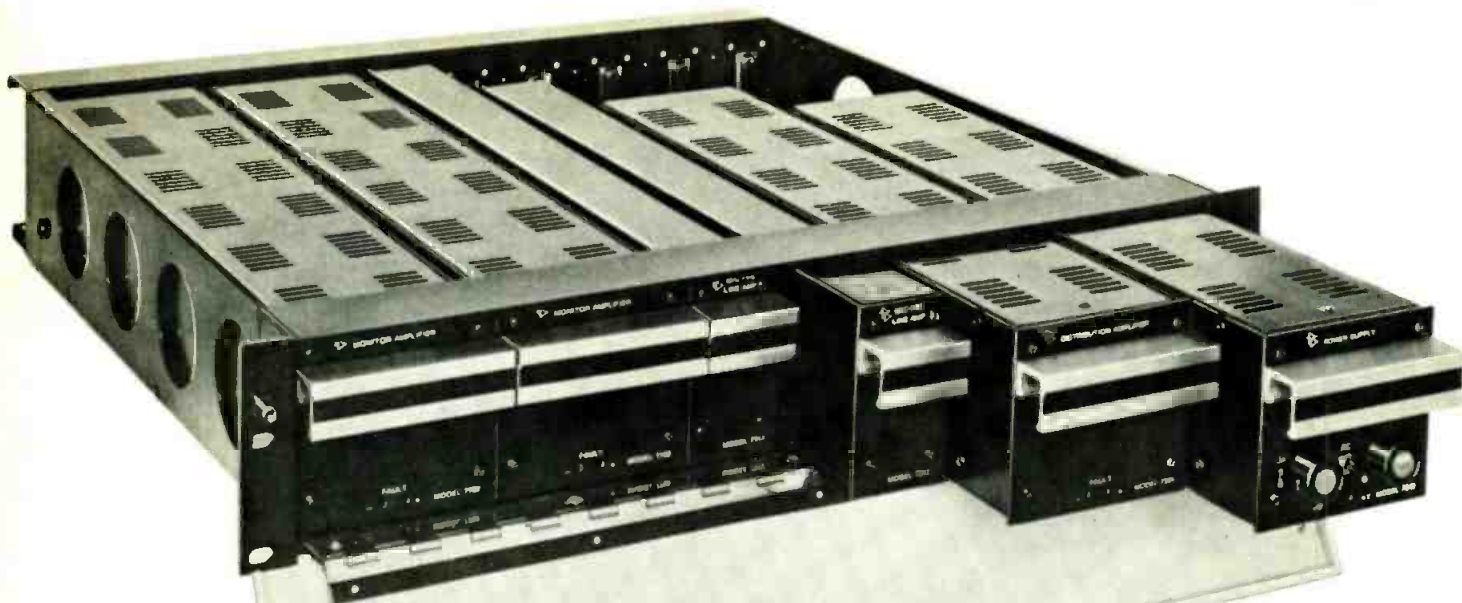

WILL YOUR PRESENT AMPLIFIERS MEET THESE SPECS?

From the leading U.S. manufacturer of audio consoles comes a new series of audio amplifiers with the most advanced specifications and unexpected features available anywhere.

Designed at the request of a major broadcasting network, these modular amplifiers will replace their present audio facilities and are specified into all their new installations. This series of Automated Processes' Audio Amplifiers will outperform any competitive audio equipment!

CHECK THESE SPECS:

All amplifier modules provide transformer isolated inputs and outputs. Each amplifier may be pre-set for the desired gain by means of strapping on mating connectors. In addition, some are equipped with voltage controlled amplifiers which permit remote level control and muting, as well as remotely controlled limiting.

Reliability and safety features include: short circuit and overload protection; automatic current limiting.

MIC-PRE/LINE AMPLIFIER, Model 7312

- Internal voltage-controlled amplifier.
- Remote DC control of output level and muting.
- Remotely controllable internal limiter.

Gain Range: 20 dB to 54 dB, microphone strapping
10 dB loss to 24 dB gain, line strapping

Maximum Input Level: 0 dBm, microphone
+30 dBm, line

Maximum Output: +30 dBm, continuous sine wave

Frequency Response: ± 0.5 dB, 30 Hz to 20 kHz

Distortion: Less than .5% T.H.D. at full output, typically .05% at normal operating levels.

Maximum Output Noise: 100 dB below full output, 20 kHz bandwidth

DISTRIBUTION AMPLIFIER, Model 7326

- Six transformer-isolated outputs capable of driving six 150 ohm loads to +30 dBm simultaneously.

Gain Range: 10 dB loss to 30 dB gain
Maximum Input Level: +30 dBm

Maximum Output: +30 dBm (all 6 outputs simultaneously)

Maximum Output Noise: 100 dB below full output, 20 kHz bandwidth

Output Isolation: Greater than 50 dB, 50 Hz to 15 kHz

Frequency Response: ± 0.5 dB, 30 Hz to 20 kHz

Distortion: Less than .5% T.H.D. at full output, typically .05% at normal operating levels.

MONITOR AMPLIFIER, Model 7702

- 20 watts of sine wave power into 150 ohm, 8 ohm, or 25 volt loads.
- Internal voltage-controlled amplifier permits remote DC control of audio level and muting.

Gain Range: 32 dB to 60 dB

Maximum Input Level:

High Gain Strapping: 0 dBm

Low Gain Strapping: +30 dBm


Maximum Output: +43 dBm (20 watts) continuous sine wave

Maximum Output Noise: 85 dB below full output

Frequency Response: ± 0.5 dB, 30 Hz to 20 kHz

Distortion: Less than .5% T.H.D. at full output, typically .05% at normal operating levels.

Change to the very best... contact us for further details and prices.



AUTOMATED PROCESSES, INC.

789 PARK AVENUE, HUNTINGTON, NEW YORK 11743 • 516-427-6024

For More Details Circle (4) on Reply Card

BROADCAST engineering.

The journal of the broadcast-communications industry

April, 1976 Volume 18, No. 4

- 26 **The 20-year VTR Revolution.** In the first of a 2-part series, BE's Video Editor retraces the history of quad recorders which began, officially, in Chicago 20 years ago. **Joe Roizen.**
- 32 **Sliding Into Accuracy.** The author explains how slides are used at WOR-TV for camera alignment. **Joseph Kaspar.**
- 36 **Help! I've Got A Problem.** A modification on the ACR-25 gives an audible alarm capability that warns operators that there is a problem. **Elmer Schorle.**
- 40 **Small Market Radio Is Alive And Doing Well.** BE visits a small market station in Illinois and confirms that the backbone of American radio is doing a lot more than surviving. **Dennis Ciapura.**
- 46 **Small Market Workshop.** The author talks about the common problems of transmitters and tells what to do until the doctor comes. This is part of a continuing series of articles that will deal with the "how-to" aspects of this market. **Peter Burk.**
- 50 **Is U.S. Television Inferior?** A comparison of U.S. television with European systems. Discusses differences and speculates on how U.S. TV can be improved. **Ron Whittaker.**

About The Cover

Our cover photos were taken during our visit with small market station WRMS, Beardstown, Ill. Article begins on page 40. Cover photos by Dennis Ciapura.

Departments

Direct Current	4
Industry News	8
SBE Journal	16
Blue Bananas	24
People In The News	58
New Products	61
Zoom In	64
Ad Index	71
Classified Ads	72

EDITORIAL

Ronald N. Merrell, *Director*
Carl Babcoke, *Technical*
Pat Finnegan, *Maintenance*
Howard T. Head, *FCC Rules*
Robert A. Jones, *Facilities*
Walter Jung, *Solid State*

Rainelle Harris, *Editorial Assistant*
H. G. Roesler, *Cartoonist*
Dudley Rose, *Graphic Designer*
Joe Roizen, *Video*
Archer Taylor, *CATV*
Dennis Ciapura, *Audio Editor*

CIRCULATION

Evelyn Rogers, *Manager*

ADVERTISING

Mike Kreiter, *Director*
Gloria Parmenter, *Production*
Regional Advertising Sales Offices on
Advertisers' Index page.



Broadcast Engineering is published monthly by Intertec Publishing Corp., 1014 Wyandotte Street, Kansas City, Missouri 64105. Telephone: (913) 888-4664.

Broadcast Engineering is mailed free to qualified persons engaged in commercial and educational radio and television broadcasting. Non-qualified subscriptions in the U.S. are \$6.00 one year, \$10.00 two years, \$13.00 three years. Outside the USA add \$1.00 per year to cover postage. Single copy rate 75 cents. Back Issues rate \$1.00. Adjustments necessitated by subscription termination at single copy rate.

Controlled Circulation postage paid at Indianapolis, Indiana.




Robert E. Hertel, *Publisher*

INTERTEC PUBLISHING CORP.
Subsidiary of HOWARD W. SAMS & CO., INC.

Copyright, 1976, Intertec Publishing Corp. All Rights Reserved: Material may not be reproduced or photocopied in any form without written permission of Publisher.

1600 SERIES SWITCHING SYSTEMS ARE AVAILABLE IN STANDARD CONFIGURATIONS FOR ALMOST ANY APPLICATION—IN NTSC, PAL, AND PAL-M VERSIONS

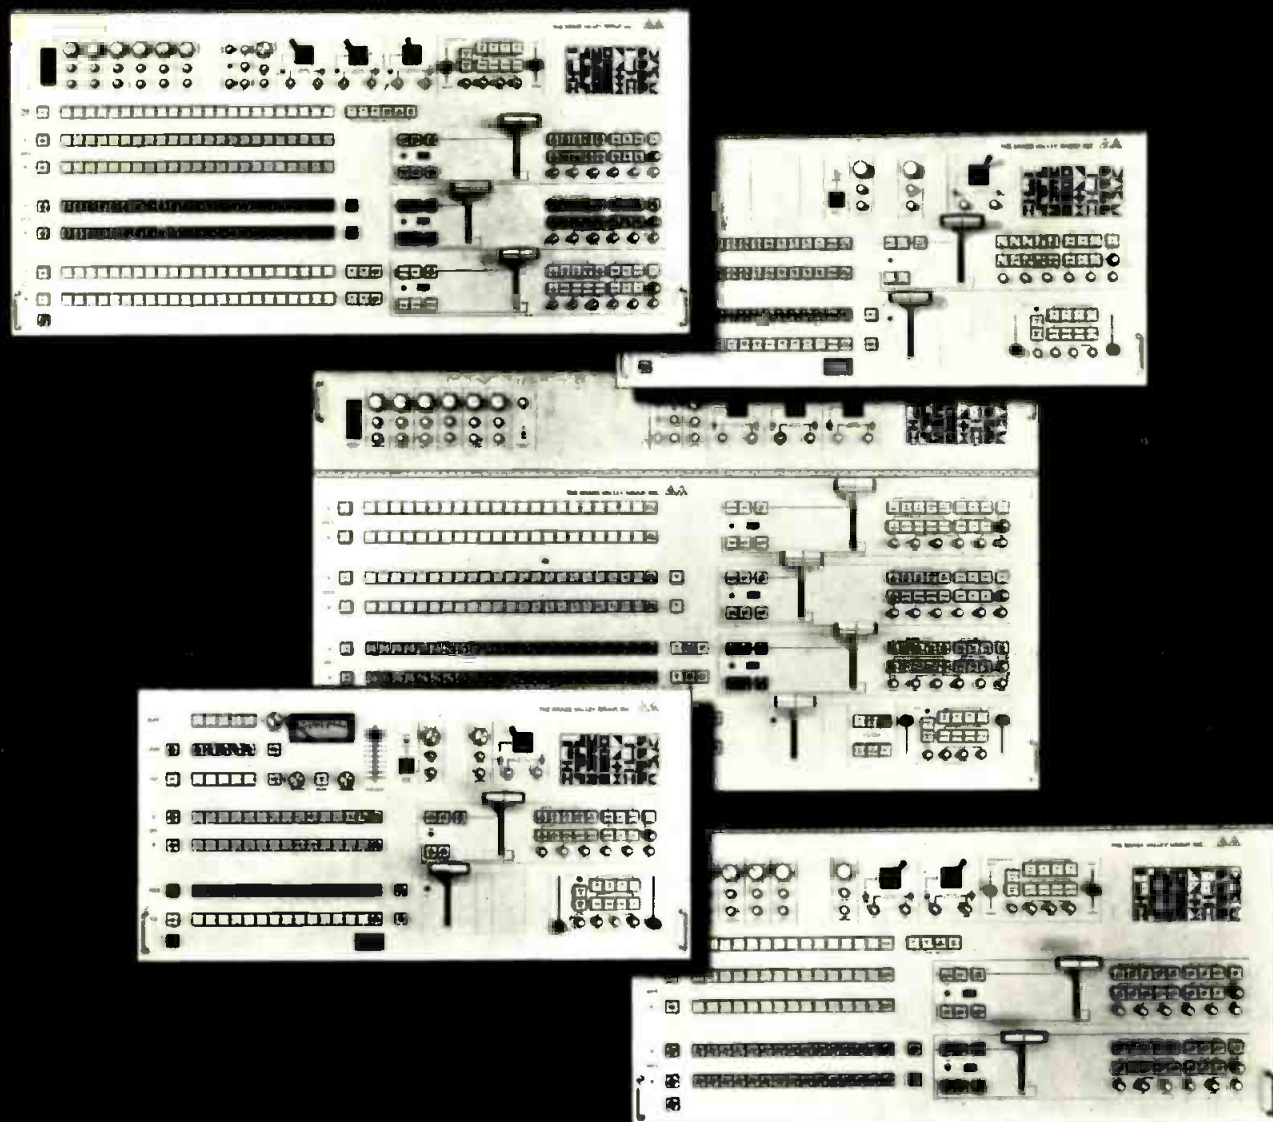

THE GRASS VALLEY GROUP, INC. 
A TEKTRONIX COMPANY

Station Plaza East
GREAT NECK, NY 11021
(516) 487-1311

4419 Van Nuys Blvd, Ste 307
SHERMAN OAKS, CA 91403
(213) 990-6172

1644 Tullie Cir, NE
ATLANTA, GA 30329
(404) 634-0521

P.O. Box 482
MABANK, TX 75147
(214) 887-1181

810 W Bristol Street
ELKHART, IN 46514
(219) 264-0931

DIRECT CURRENT FROM D. C.



April, 1976/By Howard T. Head and Harold L. Kassens

AM Antenna Sampling System Standards Adopted

The Commission has adopted new technical regulations establishing standards for the design and installation of sampling systems for AM directional antennas. The action brings to a close a proceeding instituted approximately three years ago.

The new regulations, first of their kind, describe the requirements of the sampling system in considerable detail. In addition to the existing requirement that the antenna (phase) monitor be type-accepted, specifications are established with respect to the type and length of sampling line, together with the fittings to be used with it and the routing of the line between towers and transmitter. The details of the sampling loops are spelled out and the circumstances under which current transformers may be employed in lieu of sampling loops are prescribed.

The new requirements will apply to all construction authorized after March 18, 1976. Existing stations are not required to rebuild their sampling systems, but for those who do on an optional basis, the licensee will be exempted from routine reading and logging of antenna base currents, and making monitor point readings more frequently than once a month.

FM Interference to TV Channel 6 Still a Problem

The Commission continues to grapple with problems involving FM broadcast interference to TV Channel 6 on a case-by-case basis. In a recent case in New England, the Commission authorized an educational FM station to shift to a lower frequency and increase power notwithstanding protests of interference to the Channel 6 TV station. The educational FM band, beginning at 88 MHz, is immediately in frequency above TV Channel 6 between 82 and 88 MHz.

The problem continues to grow as public agencies encourage the construction and expansion of public radio in the educational portion of the FM band immediately above the TV channel. In the New England case, the Commission conditioned the grant on non-interference to TV reception, requiring the FM permittee to establish that no interference was being caused to Channel 6 reception, and to install filters wherever such interference might occur.

(Continued on page 6)

We in the West welcome **Challenge**



Sparta was asked, "Can you make a console which does more, in less space, better, than you've ever built before?"

Our response was the Western double-barrel above — the 3000-Series consoles!

Model 3310 Monaural 10-Mixer Console

- Dual-channel, with noiseless DC switching, identical Program and Audition metered busses.
- Oversize mixer knobs controlling precision step attenuators, On/Off remote mixer control.

- Large illuminated VU meters (4-1/2"), and heavy duty lever switches.
- Interchangeable low- and line-level input cards, the latter with three input sensitivities switch selectable.
- Intercom... Send/Mix selection feeds remote lines or mixer... one-motion complete accessibility... bridging input... all active circuits plug-in, IC.

Model 3410 Stereo 10-Mixer Console

- All features of the 3310...and MORE!
- 'Pan Pot' to position audio source across stereo field.
- Metered mono output.

**They do more . . . in less space . . . better . . . less expensively
than any other broadcast console!**



5851 Florin-Perkins Road, Sacramento, Ca. 95828 (916) 383-5353

For More Details Circle (5) on Reply Card

DIRECT CURRENT FROM D.C.

(Continued from page 4)

The Commission has two proceedings pending which if acted on could largely eliminate the need for case-by-case consideration of such proposals. A proposal in Docket 14185 issued almost ten years ago provides for a table of allocations for non-commercial FM stations. Action on this proposal was delayed for a time pending concurrence of the Canadian and Mexican authorities, but this has since been received. Likewise, a proposal in Docket 19183 inquiring into a wide variety of interference complaints, including this one, has lain without action for almost five years.

Inquiry Into TV Captioning for Deaf Expanded

The Commission has issued proposed rules which would permit the encoding of a signal on Line 21 of the TV raster to permit specially-designed TV receivers to display captions associated with the program. The system, developed by the Public Broadcasting Service (PBS), would provide visual captions for viewers with serious hearing impairments. PBS has said that over 13 million persons in the U.S. would benefit from the system.

The pending proposal would be applied on a voluntary rather than a mandatory basis. It is in addition to a concurrent proposal to require the captioning of emergency information notifications on all such messages on a mandatory basis.

Short Circuits


The Commission has eliminated rule provisions permitting the use of the International Digisonics Code (IDC) on TV commercials... An experimental authorization has been issued for AM operation on 530 kHz (see 7/75 and 12/72 D.C.) for the Walt Whitman Bridge across the Delaware River at Philadelphia...The proposal to expand the Class D Citizens Band from 23 to 50 channels has run into a snag because ten pairs of channels would have a frequency difference of 455 kHz, the AM standard I.F. ...The Commission has reminded TV licensees that the color burst should be deleted for monochrome transmissions except for brief inserts...A proposal has been made for a 10 kW station to operate on 160 kHz in the Washington, D.C. area to provide helpful information for Bicentennial visitors...The Commission has proposed relaxation of TV receiver tuner accuracy above Ch. 70 from +1 kHz to +2 kHz ...NAB has petitioned the Commission to permit 100 MHz in the 6 GHz band to be used on a shared basis with common carriers so as to provide ENG circuits...Don't sing it, Sam: The Commission has urged licensees not to sing or hum the weekly EBS test message, stating with stuffier-than-usual language that "musical rendition or alteration of the EBS test announcement does not adhere to the seriousness of the EBS program."

MCMARTIN



BA-25K shown


**AM
TRANSMITTERS**
1000W • 2500W

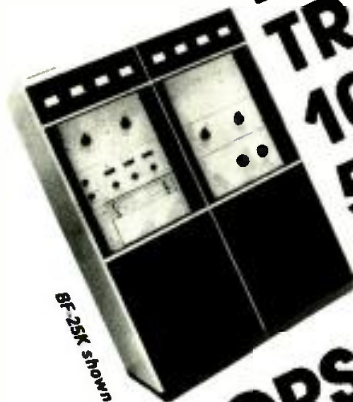

BF-25K shown

**FM
TRANSMITTERS**
10W • 1000W • 3500W
5,000W • 10,000W
27,500W • 55,000W

**MONITORS • AM Modulation
FM Frequency/Modulation
mono
stereo
sca**

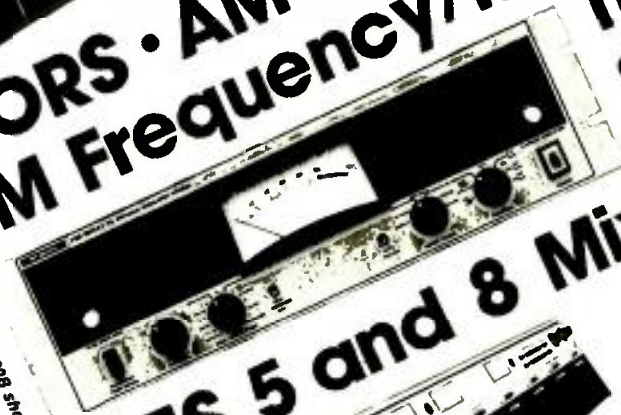

TBR-3500B shown

CONSOLES 5 and 8 Mixers



B-300 console shown

**FM Relay and SCA Receivers
RF Amplifiers
Power Amplifiers**

1956 twenty years serving the broadcast industry 1976

McMartin Industries, Inc. • 4500 South 76th St. • Omaha, Nebraska 68127 • (402) 331-2000 • Telex 48-485

For More Details Circle (6) on Reply Card

April, 1976

Station ID's With Names, Too

The Commission has amended its rules concerning station identification announcements to permit the insertion of a licensee's name between the station call sign and the city of license.

The action was in response to a petition by Straus Communications, Inc., seeking relaxation of Section 73.1201(b)(1) of the rules.

Straus contended that no purpose was served by literal adherence to the provisions of Section 73.1201(b)(1) which required that in station identification announcements, the station's call sign shall be "immediately followed by the name of the community or communities specified in its license as the station's location."

KGMI, Inc. supported Straus' petition, but also proposed that the FCC permit an insertion such as XXX "the sound of" anytown in the station identification announcements.

The Commission said that inclusion of the licensee's name in the identification would aid, not hinder,

the informational purposes of these announcements. Moreover, it pointed out that grammatically, insertion of the licensee's name between the call letters and location would provide for a better flow than the licensee's name being mentioned after station location.

It said, however, insertion of a phrase like "the sound of" as KGMI sought, was material that has no function in terms of station identification, and would likely result in confusion. Moreover, it posed a problem in terms of Commission policy prohibiting inclusion of promotional material in these announcements.

In response to a petition by William E. Loucks seeking a requirement that the state as well as the city of license be required in station identification announcements, the FCC said such a requirement had not been shown to be necessary, but it encouraged such announcements in instances where they might be useful in avoiding confusion.

Drug Panels Are Planned

The Federal Communications Commission, in cooperation with the Federal Trade Commission, announced recently that three panels exploring the possible impact of televised over-the-counter drug advertisements on children, adolescents, and adults, are scheduled for May 20 and 21, 1976, at the FCC (1919 M Street, Northwest, Washington, D.C. 20554) to provide the agency staffs with information and guidance in future research projects. Each of these panels will consist of selected individuals whose names will be subsequently announced.

Two of the three panels will discuss existing research while indicat-

ing directions for future research on (1) the question of cause and effect relationships between televised over-the-counter drug advertisements and the misuse of such products by young children, and (2) similar questions concerning the role of televised over-the-counter drug advertisements and the illicit use of restricted drugs by elementary school children, adolescents, and adults. The third panel, in addition to discussing research needs, will consider various actions that could be taken by broadcasters, advertisers, manufacturers, Congress, various governmental entities, schools, and the general public should action be deemed appropriate.

The Commission has adopted rules setting minimum standards for the installation and maintenance of sampling systems for antenna monitors at standard broadcast stations employing directional antennas.

(Sampling systems deliver samples of tower currents to antenna monitors which provide indications for the radio operator of the relative phases and amplitudes of the currents in the elements of a directional array of an AM station. The information is needed to ensure proper maintenance of the radiation pattern in order to minimize interference to other stations.)

The new rules, which become effective March 18, will apply to new stations, stations making major changes and stations incapable of maintaining their directional antennas in adjustment, where some portion of the difficulty can be attributed to inadequacies in the monitoring system.

The action terminated a rule-making proposal begun February 21, 1973, to determine what constituted the basic elements of an adequate sampling system and the feasibility of promulgating minimum standards for its design and installation.

The Commission noted that on January 10, 1973, in Docket 18471, it adopted rules providing for the type approval of antenna monitors and established June 1, 1977, as the date by which all standard broadcast stations employing directional antennas will have to abandon obsolete monitors of questionable accuracy and be equipped with stable, accurate and easily manipulated instruments of modern design.

The Commission said the current proceeding was the final step toward ensuring that the performance of directional antennas will be adequately monitored.

The rules adopted govern the design and installation of sampling systems and relax certain logging requirements for those stations employing sampling systems meeting the minimum standards prescribed.


(Ten minutes in the life of a pulse count news editor)




"And now for the 6:..."



"And now for the 6:00 O'clock..."



"And now for the 6:00 O'clock ne..."



"And now for the 6:02 O'clock news?"



CMX editing systems are committed to SMPTE time code editing because it is fast and accurate (± 0 frame). There are no differences between preview and record. With CMX, you no longer have to "punch and pray". You can edit with precise syllable and frame control.



Keep your pulse under control with
CMX time code editing.

cmx systems

AN ORROX COMPANY
3303 Scott Boulevard, Santa Clara, CA 95050
Phone: (408)988-2000 Telex: 910-338-0554

SALES AND SERVICE—New York: (212)371-1122,
Los Angeles: (213)980-7927, Dallas: (214)242-2690

For More Details Circle (7) on Reply Card

FCC releases FM study results

On December 4, 1975, the Commission formally reopened the rule-making proceeding concerning the use of clear channels in the standard broadcast band. This action was taken with the expressed intention of seeking a final resolution of this issue with due regard to present-day conditions and current Commission policies.

To facilitate these efforts the Commission recently contracted the Office of Telecommunications (OT) to carry out a study of coverage areas for all FM stations currently operating in the continental United States. This study was done in order to determine the number and location of residents in this country who do not enjoy primary aural

service during the nighttime hours.

The Office of Telecommunications was instructed to develop two sets of coverage maps; the first designating station contours at a signal strength of 1 mv/m and the second designating contours at a signal strength of 50 uv/m. Both sets were developed using the Commission's standard propagation model.

The OT study now has been completed. The results indicate there are approximately 150 counties, with a total population of less than 2 million persons, located beyond the reach of FM stations. Additionally, the results indicate that all such counties are located in the western half of the U.S. These findings are based on the assumption that a signal strength of 50 uv/m is sufficient to assure adequate reception of FM service. Maps designating the coverage of FM stations now are available for public inspection in the Commission's public reference room at 1919 M Street, N.W., Washington, D.C. 20554. They may be viewed during normal business hours (i.e. 8 A.M. to 4:30 P.M., Monday thru Friday). It is hoped that the availability of this information will facilitate the Commission's efforts to determine the best possible use of clear channel frequencies.

FM channel study available

The Research and Standards Division of the FCC's Office of Chief Engineer has released a report "FM Broadcast Channel Frequency Spacing".

Written by Harry Fine and George Sharpe, the report studies the effect of reducing the adjacent channel frequency offset from the currently used 200 kHz to 150 kHz and to 100 kHz. The analysis shows that both the 100 kHz offset, with a receiver filter, and the 150 kHz offset, with no filter, are more efficient in population and area coverage efficiency than the 200 kHz offset for both stereophonic and monaural operation.

A limited number of copies of the report—FCC/OCE RS 75-08—are available for public distribution in Room 7202, 2025 M Street, N.W., Washington, D.C. 20554.

Spotmaster® CART MACHINES THE RUGGED ONES


SERIES 3000

- Auto release deck — massive, quiet operating air damped solenoid.
- Low power consumption — less than 45 watts.
- PHASE-LOK III head bracket — minimizes stereo phasing problems.
- Full range of mono and stereo models for A, B and C size carts.



SERIES 4000

- All the same solid features as the SERIES 3000 with added standard features — microphone inputs, dummy head in record position (on playback models) and many others.
- New styling for the discriminating broadcaster.
- Additional optional features include internal fault/splice detector.



SERIES 5000

- Modular design with fold down front panel and slide out direct drive decks.
- Auto release decks — massive, quiet operating air damped solenoids.
- PHASE-LOK III head brackets — minimize stereo phasing problems.
- Separate electronics for each deck on 2 PC cards.



OVER 40 CART MACHINE MODELS. ALSO AUDIO CONSOLES, AUDIO PROCESSORS, AND STUDIO ACCESSORIES.

BROADCAST ELECTRONICS INC.

— A FILMWAYS COMPANY —

8810 BROOKVILLE ROAD, SILVER SPRING, MD. 20910
PHONE: 301-588-4983 TWX: 710-825-0432
CABLE: "SPOTMASTER"



IT'S DECADE TWO

...and the company whose innovations over the past 10 years revolutionized color television cameras in the U.S. and throughout the world, now puts its 3-Plumbicon picture and a beam-splitter prism into the most exciting new lightweight camera value on the market.

The PHILIPS LDK-11. Full broadcast quality for both ENG and commercial production!

With the LDK-11 no longer must broadcasters or production companies sacrifice picture quality or operational features for portability. Broadcasters started using the LDK-11 in January, 1976 and the reactions have been outstanding. A typical report from one of the first stations to get delivery... "the field pictures look as if they were shot in our studio!"


Battery or AC powered and with full production control either remotely or at the backpack, the LDK-11 has all the key Philips engineering features that make it like no other comparable camera in the world. These features include Philips famed 3-Plumbicon* tube picture, beam-split prism with bias light and Philips linear matrix for superb colorimetry. Also included are H & V contours, auto iris, auto white balance, genlock sync generator, switchable gain and gamma, built-in color bars, remote VTR and zoom controls, and two audio channels.

All this and more add up to the

utmost flexibility and economy for ENG, local remote and studio production...without compromise. And the LDK-11 is available now!

Send for more information. Or, better still, have your Philips representative set up a demo for you. But do it today before you get TKO'd into anything else. Broadcast Products, Philips Audio Video Systems Corp., 91 McKee Drive, Mahwah, New Jersey 07430. (201) 529-3800.

PHILIPS®

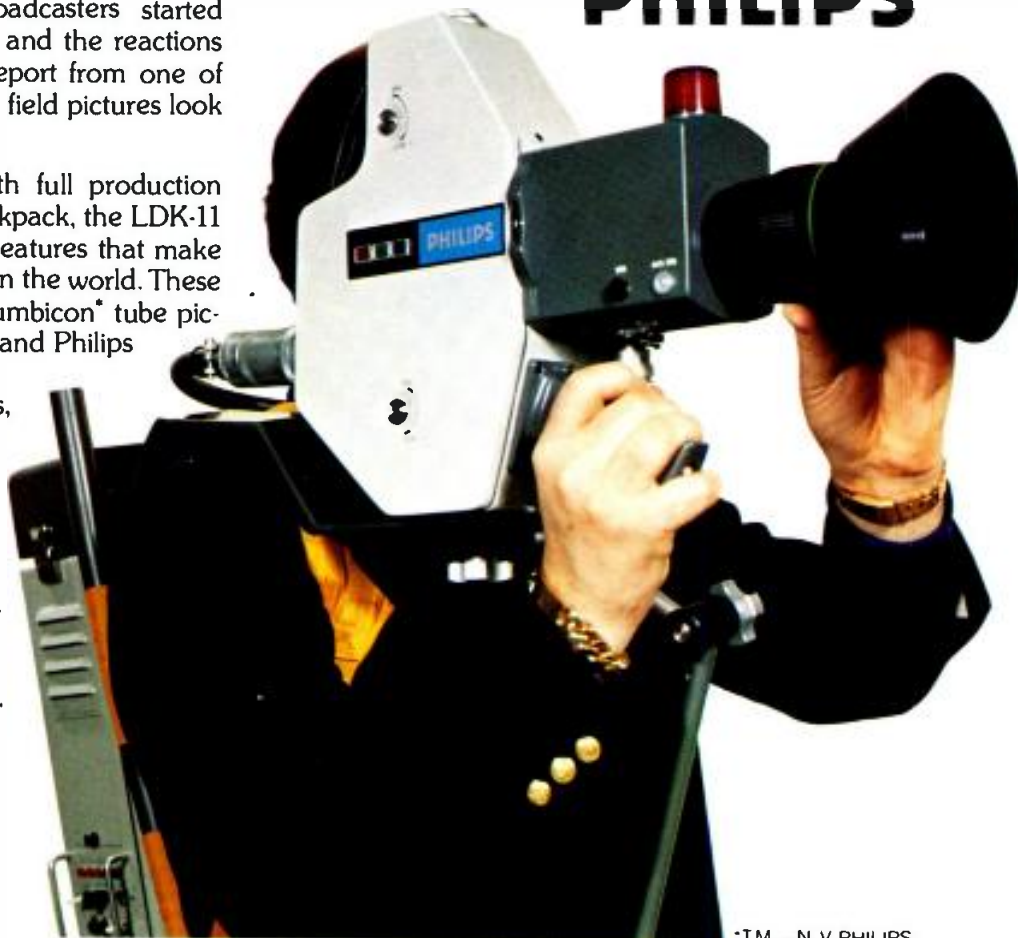

*TM N V PHILIPS

the little mother



dbx new 160 compressor/limiter

She's got a compression ratio you can set anywhere from 1:1 to infinity. And she's got a very low distortion figure even at high compression ratios. You can set her threshold from -38 to +12 dBm, and her two red LEDs let you know whether she's above or below threshold. Her meter range is from -40 to +20 dB, and you can set her meter zero at any line level between -10 and +10 dBm. Her illuminated meter is switchable to read input, output, or gain change.

She uses true RMS level detection, which you know is more reliable and accurate than other methods. Her dynamic range is enormous and her noise contribution practically negligible. Her output is automatically ground loop compensated and she is protected against turn-on and turn-off transients. She is beautifully packaged and small enough that you can take her with you wherever you go. Or you can bolt her into the rack where she'll give you a lifetime of faithful service.

You're going to love this little mother, especially when you learn her price. She costs only \$300.00, which is a lot less than you pay for those other mothers. She's available now at your dbx professional equipment dealer's. For complete spec information including the little mother's measurements, circle reader service card or contact:

dbx dbx, Incorporated
296 Newton Street
Waltham, Mass. 02154
617/899-8090

For More Details Circle (10) on Reply Card

Jazzed up EBS Needs clarification

Occasionally the Commission receives reports of broadcast stations transmitting Weekly Off-The-Air Monitor Tests (73.961(c)) in a "Jazzed Up" or singing manner.

With the advent of the new two-tone EBS Attention Signal, the use of singing or "Jazzed Up" Test Announcement Procedures must be clarified.

The Emergency Broadcast System was established to provide an emergency network capability for the President to communicate with the public during emergency situations and, in some instances, may be activated for the benefit of state and local officials in connection with severe weather and other types of day-to-day emergencies. Part 73.961(c) of the Commission's rules state, "Weekly Off-The-Air Monitor Tests will be conducted by all AM, FM and TV broadcast stations once each week between the hours of 8:30 AM and local sunset. These tests will be conducted in accordance with procedures set forth in the EBS Checklist furnished to all broadcast stations."

While the above regulation, along with the procedures set forth in the EBS Checklist, does not specifically prohibit the addition of any music, humming, background noise, etc., to the test message, the Commission is of the opinion that any form of a musical rendition or alteration of the EBS Test Announcement does not adhere to the seriousness of the EBS program.

The Commission wishes to emphasize the importance of the EBS, wherein it provides the general public with a reliable medium with which to acquire accurate and concise information, in case of any emergency situation.

The Commission urges broadcast stations to voluntarily refrain from transmitting EBS Test Announcements in any of the above mentioned formats.

**Send Your
Operating Tips To
Station-To-Station**

CANON ANNOUNCES THE ULTIMATE STUDIO LENS



	PV18x12B2 (for 1 1/4"/25mm Plumbicon*)	P18x16B2 (for 1 1/4"/30mm Plumbicon)
Focal length with 1.5x range extender	12-216mm	16-288mm
with 2x range extender	18-324mm	24-432mm
Maximum relative aperture	1:1.6 (f=12-172mm) 1:2.0 (f=216mm)	1:2.1 (f=16-230mm) 1:2.7 (f=288mm)
Zoom ratio	18x	18x
Image format covered	12.8 x 9.6mm; 16.0mm dia.	17.1 x 12.8mm; 21.4mm dia.
Minimum object distance from front vertex	0.7m (27.6")	0.7m (27.6")
Object dimension at minimum object distance: Wide:	103.2 x 77.4cm; 129.0cm diameter	
Tele:	5.3 x 4.0cm; 6.7cm diameter	
Back focal distance	62.65mm (in air)	78.08mm (in air)
Glass compensation	69.2mm (BK7)	70.2mm (BK7)
Wavelength range for color correction	400-700nm	400-700nm
Weight	23kg (approx. 50lbs.)	23kg (approx. 50lbs.)
Dimensions	466.5mm length x 284mm width x 260.5mm height	
Focus and Zoom control	Manual, with plug-in interchangeable servos	
Range extender control	Plug-in servo/manual	

*TM N.V. Philips of Holland

The new Canon 18x series for major broadcast cameras. With the best relative aperture, superior wide angle and shorter M.O.D. Choice of manual or servo focus and zoom. Built-in servo/manual operated 1.5x and 2x extenders. And interchangeable, plug-in servo modules, for easier service. All at a competitive price.

Judge for yourself. Compare the specifications below. Factor in Canon's nationwide service and comprehensive loaner program. And see a demonstration.

For more information, please write or call:

Canon®

Canon U.S.A. Inc. Head Office: 10 Nevada Drive, Lake Success, N.Y. 11040 (516) 488-6700 • 140 Industrial Drive, Elmhurst, Ill. 60126 (312) 833-3070 •
123 Paulding Avenue East, Costa Mesa, Ca. 92626 (714) 979-6000
Canon Optics & Business Machines, Canada, Ltd., 3245 American Drive, Mississauga, Ontario L4V 1B8, Can.
Canon Amsterdam N.V., Industrial Products Division De Boelelaan 8, Amsterdam, Netherlands

© 1975, Canon U.S.A. Inc.

For More Details Circle (11) on Reply Card

April, 1976

13



Harris' superb new TC-80 features full automatics, and add-on Triax.

The deluxe TC-80 live color camera redefines "top-of-the-line", with unmatched picture quality, real operating convenience, super-stable mechanics, easiest setup... and add-on Triax.

This is the first American-built camera with add-on Triax... buy it now, or simply add it later in the field! No camera modifications required.

A full complement of automatics is standard in the TC-80,

including white balance, black balance, centering, and a unique automatic iris. Fewer operator adjustments for better picture quality.

All setup and operating controls are away from the camera head, and are brought up on the CCU front panels with knobs. No screwdrivers are needed.


Use either standard or anti-comet tail Plumbicon* camera tubes... without modifications. And a wide variety of lenses may

be employed, from the largest 34-to-1 to 10-to-1, or even smaller.

Prism, lens, tubes, yokes can all be changed and interchanged easily, without realignment.

There's much more. Write Harris Corporation, Broadcast Products Division, 123 Hampshire Street, Quincy, Illinois 62301.

*Reg. T.M. of N.V. Philips of the Netherlands

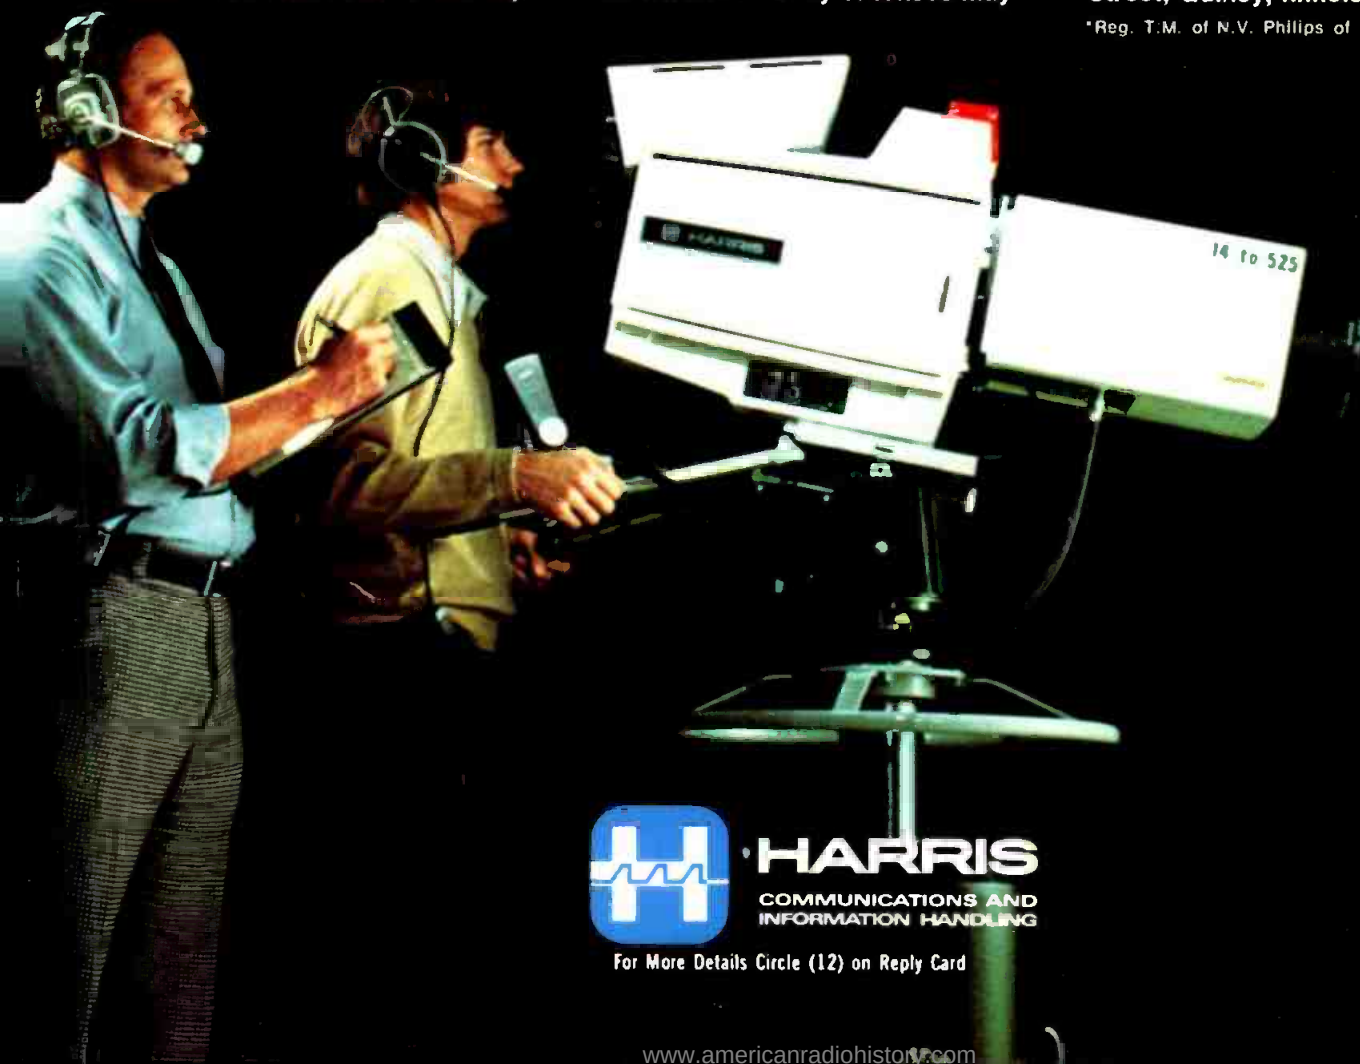

HARRIS

COMMUNICATIONS AND
INFORMATION HANDLING

For More Details Circle (12) on Reply Card



Certification Program

There will be no blanket mailing of the Certification application packets to the membership. Engineers interested in taking the exam should simply write to the National office and request an application form. Similarly, all candidates who want to be Certified under the Grandfathering Provision should make the same request. Consideration for extending the Grandfathering Provision past the previously designated June, 1976, cutoff date, will be taken up at the SBE Board meeting in Chicago during the NAB Convention. Please look in your post-convention copy of *The Signal* and the May SBE

column in *Broadcast Engineering* for that decision. The SBE address is: P.O. Box 88123, Indianapolis, Indiana 46208, attention: Vince Flanders, Certification Secretary.

Attention, All Members

There are many among you who may be eligible for an upgrade in membership. If, for instance, you are an Associate Member and have received your First-Class license (or the equivalent), or perhaps hold Member status and are eligible to become a Senior Member, contact Vince Flanders. He will send an application form, which will be reviewed, upon receipt, by the Admissions Committee, and will then mail a new certificate indicating your new grade of membership. There is no charge for this procedure unless you are a Student Member and upgrade to a Member standing. Then you must pay the difference in membership fees.


In both the SBE Directory and the new SBE stationery, the address

Notice!
SBE Application
Form
Is Printed On
Page 23
For Your Convenience

for *The Signal* office in Washington, D.C., is listed incorrectly. Please note that it should read 2000 N Street, N.W., etc., not 200 N Street. There is, indeed, a 200 N Street in that city, and the homeowners may not be interested in your newsletter correspondence.

Assistant Secretary Vincent Flanders announces that the printer in New York mailed both the special issue of *The Signal*, and the SBE directory during the second week in February, and members should have received them by now.

(Continued on page 20)

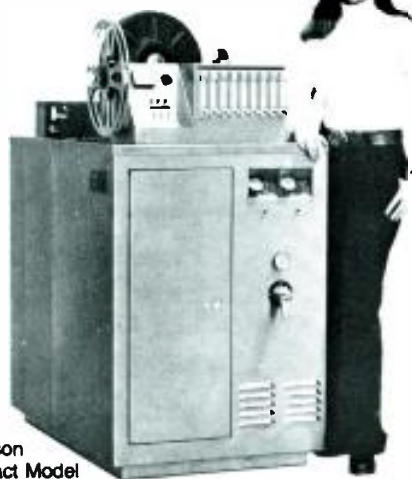

Jamieson
Compact Model

Jamieson No.1 in TV!

Why is the Jamieson Processor No. 1 in TV?

The best answer is from someone who owns one. Someone you know owns a Jamieson. Probably a lot of people you know. Why not ask them about it? The best way to get an unbiased appraisal of its performance. Or ask us ... we'll be more than happy to tell you about the Jamieson Processors and give you references.

JAMIESON'S ADVANCED DESIGN TECHNOLOGY FEATURES

- Film advance virtually tension-free. The demand top-overdrive film transport uses no clutches, floating rollers or film sprockets.
- Smaller machines take only half the floor space.
- Solution volumes reduced 15 times over open-tank designs.
- Temperature in primary solutions is controlled to an accuracy of a few hundredths of a degree.
- The elliptical shape of the tube protects the film and provides high induced turbulence.



JAMIESON FILM COMPANY
a division of Kreonite, Inc.

6911 FOREST PARK ROAD • DALLAS, TEXAS 75235
PHONE: 214-350-1283 • TELEX: 73-0932

Please send information on Jamieson Processors and a list of some users.

Name _____ Title _____
Firm _____ Phone _____
Address _____ City _____
State _____ Zip _____ JAMIESON FILM COMPANY
BE-4 6911 Forest Park Rd. Dallas, TX 75235

For More Details Circle (13) on Reply Card

BROADCAST ENGINEERING



One of the things RCA does best is help keep your lights lit.

With tubes — camera, receiving and power. SK replacement semiconductors along with a complete stock of RCA exact replacement parts.

RCA's new Distributor and Special Products Division can supply them all. And more.

It's certain to make all your

broadcast and broadcast maintenance needs much simpler to meet. With a minimum of panic and a maximum of efficiency.

Our new division was set up to make your life a lot easier, and to keep you "on-air" more dependably. It's ready to start doing it. Now.

For full information, check with your RCA Distributor or contact RCA Distributor and Special Products Division, Bldg. 206-2, Cherry Hill Offices, Camden, New Jersey 08101.

In Canada, contact RCA Limited, Distributor and Special Products Division, Sainte Anne-de-Bellevue, P.Q.

RCA

**Distributor and
Special Products Division**

For More Details Circle (14) on Reply Card

Ampex AVR-3. The

Two decades ago, Ampex introduced the first videotape recorder, and now Ampex opens a new generation of VTR capability with the all-new AVR-3, the machine that thinks for itself.

You'll want an AVR-3 for a couple of basic reasons: for the "intelligent" way it does an outstanding job for you, and for the superb pictures it makes. In any broadcast band it delivers superior picture quality. With Super High Band Pilot you have the most foolproof record/playback technology available.

"Intelligent." What does it mean? It's a lot of things, such as automatic sensing and switching of speeds and bands. It's an all-new optional Edit Controller for teleproduction capabilities that once seemed impossible. It's fast, efficient, gentle tape handling. And much more.

There isn't anything in the world like an AVR-3. It produces unequalled pictures; it protects you against errors in playback settings; it provides the easiest and best editing you've ever known; it's going to give you longer service life than any other VTR you've ever owned. AVR-3 is the best recording investment on the market.

Super high band pilot **The Mouthful** **That Becomes An Eyeful.**

How does a VTR compensate for signal irregularities introduced during the recording phase? In the past, those corrections were made on the basis of "average" information. In the

new AVR-3, with Super High Band Pilot, signal correction is triggered on a continuous basis. Color velocity errors and equalization variables are "seen" and corrected before they can be displayed. The result? Perfect pictures. You can see the difference.



First "Intelligent" VTR



With Super High Band Pilot, you'll get a picture at 7½ inches per second that's virtually as good as you've learned to expect from 15 ips High Band. Half the tape speed means half as much tape. It's a money saver.

Recording options

When you order your AVR-3, you'll be able to choose one of the following pairs of recording bands: Super High Band Pilot/High Band; High Band/Low Band Color; Low Band Color/Low Band Monochrome. And no matter which pair of bands you specify, you'll get both 15 ips and 7½ ips speed capability.

"Intelligent"

Putting the Brain to Work.

The first thing you'll notice about your new AVR-3 is the way it "knows" how a given videotape was recorded. It'll automatically sense the recording speed and the band you used, and will switch to the right playback configuration. Intermixing tapes won't be a problem, because the AVR-3 always knows how to sort them out.

The second feature you'll notice is the way your AVR-3 handles tape. Punch up a fast shuttle, and AVR-3 programs the acceleration from a gradual start to speeds up to a flying 375 ips. Then, as the tape approaches end-of-reel (or a cue point), the

program takes over again, producing a smooth deceleration curve to a precise, dead stop. You'll never damage a tape as you run it back and forth, time after time, on an AVR-3.

Editing

If You Can Imagine It, You Can Accomplish It.

The standard AVR-3 editor permits manual insert and assemble edits. If your needs are simple, you can stop right here.

The optional Edit Controller takes you the rest of the way. Using either time code or tape timer information, it includes search capability. This feature gives you separate video and audio edit points, and the keyboard control allows you to move or enter edit points at will.

There's more. An optional color framer eliminates *all* color ambiguities between edited segments. A time code generator and reader and a character generator are other handy options.

Housekeeping and computer control

What else does the AVR-3 IQ do to make your life easier? Once the video and audio edit points are keyed in, Edit Controller takes over the housekeeping. It automatically computes and controls pre-roll addresses, acceleration/deceleration profiles, synchronizing information, and all switching


necessary for precise edits. An optional computer interface lets you work with any external editing system, such as the fully computerized Ampex EDM-1.

Economics

Good at First, Better Every Year.

Even the basic AVR-3 model will outperform most previous top-of-the-line VTRs. And no matter how you equip your AVR-3, it'll cost less than you'd expect and then pay for itself with many years of reliable, professional service.

Complete technical data and performance specifications are now available in our AVR-3

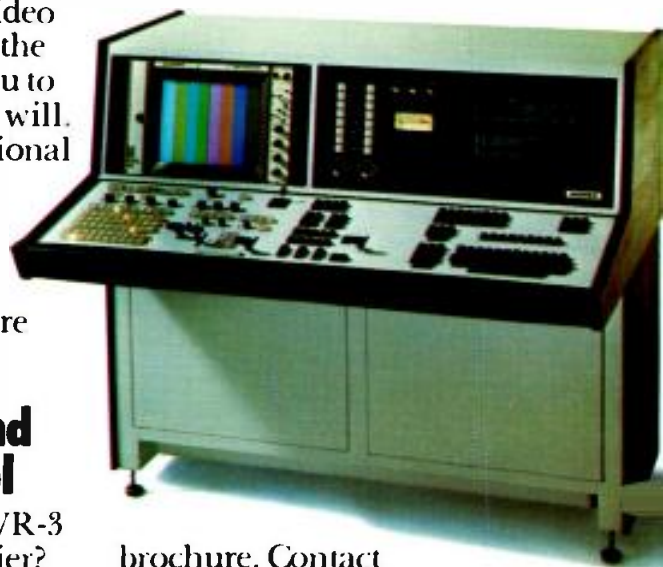

brochure. Contact your Ampex Video Sales Engineer, or write us for your free copy.

AMPEX

Ampex Corporation
Audio-Video Systems Division
401 Broadway, Redwood City
California 94063, (415) 367-2011

For More Details Circle (15) on Reply Card

SBE Membership Application

This month's issue of *Broadcast Engineering* contains a copy of the SBE membership application. Even if you already belong, you may want to clip it out to pass on to a friend who may be interested in joining. At the same time, why not acquaint him with the objectives of the Society of Broadcast Engineers:

(1) to share and increase knowledge in the field of broadcast engineering, and to promote the advancement of this, and related, sciences; (2) to establish standards of professional education, training, and competence for broadcast engineers, and to professionally recognize the achievement of these standards; (3) to stimulate interest in broadcast engineering, and to encourage the exchange of ideas among its practitioners; (4) to create a working alliance with other organizations affiliated with broadcasting, with

emphasis on the interests of the listener; and, (5) to hold meetings for learning and discussing professional advances, and to promote additional activities which fulfill the purposes of this Society.

SBE CHAPTER MEETINGS

Chapter 9: Phoenix, Arizona

Chapter 9 met February 24 at 7:00 p.m. at KAET in Tempe. Pete Bernstein and Kaas Vanderkyle of Amperex demonstrated a complete setup of the Plumbicon tube. (Leon Anglin, Chairman, SBE, P.O. Box 615, Phoenix, Arizona 85001, (602) 285-7333).

Chapter 11: Boston, Mass.

The Boston SBE Chapter met on Wednesday, February 18, at Microwave Associates in Burlington, Mass. Following an organizational meeting, Mr. Dan McCarthy and Mr. Frank Miani gave a test demonstration of a multi-hop microwave video and audio system. (Bob Molloy, Chairman, 66 Bellevue Street, Manchester, New Hampshire 03103, (603) 669-1250).

Chapter 15: New York, N.Y.

On February 12, members of Chapter 15 met to hear Mr. Leonard Kahn of Kahn Communications, Inc., Freeport, New York. Mr. Kahn spoke on AM stereo, using a conceptual approach in his discussion which included a practical demonstration of the system. A question-and-answer period followed. (John Lyons, Chairman, WWRL, 41-30 58th Street, Woodside, New York 11377, (212) 335-1600).

Chapter 16: Seattle, Wash.

The Seattle Chapter held a special evening meeting on February 11 to give everyone plenty of time to tour the KSTW-TV studios. Members reported that the facility was indeed impressive.

Also, Chapter organizers are working on a Regional Convention. Tentative dates are May 26-27, at the Sherwood Inn in Seattle. Among the early participants scheduled are: Ampex, IVC, RCA, and several well-known local distribu-

No other tape cartridge machine can do so much for so little



Recorder/reproducer \$775

PD II SERIES

At last—a machine that records and plays mono tapes in the "A" size cartridge, stops automatically on the 1kHz cue tone and—offers you longer life, less maintenance and better performance than any other cartridge machine at an economy price.

Compare for yourself

- ☐ ITC's famous air-damped solenoid with Teflon coated plunger assures super-quiet operation.
- ☐ Deck is milled from a solid block of ½ inch thick aluminum. It won't warp... presents the same flat, stable surface to cartridges every time. Assures correct azimuth of heads.
- ☐ Heavy-duty micro adjustment head assembly with adjustable tape guides. Designed for easy, accurate adjustments.
- ☐ Direct-capstan, 450 RPM, hysteresis-synchronous drive motor—with an electrolyzed shaft—minimizes wow and flutter. Eliminates need for rubber belts and separate flywheel assembly.
- ☐ New trim-line design lets you place three units side-by-side in a 19 inch rack. Each unit is only 5¾ inches wide, 5¼ inches high and 15 inches deep.
- ☐ Features latest solid state components, even for switching applications. No relays. Printed circuit cards plug in.



Reproducer
\$550



Call us and we'll prove it to you

For complete information call us collect at 309/828-1381. You'll be talking to experienced broadcasters who not only know what ITC equipment can do—but know what you want it to do.

INTERNATIONAL TAPETRONICS CORPORATION

P.O. Box 241 • 2425 South Main St., Bloomington, IL 61701

112-0001

For More Details Circle (16) on Reply Card

(Continued on page 22)

TINER COMMUNICATIONS SERVICE, INC.

We want you as a regular customer!
We are anxious as ever to serve you in your tower and antenna needs with our COMPLETE SYSTEM SERVICE

TOWER ERECTION • GROUNDING SYSTEMS • TOWER RELAMPING
• ANTENNA ERECTIONS • TOWER PAINTING (5-year-guarantee)
• ICE SHIELDS • FABRICATION • LIGHTING COMPONENTS & WIRING • CHEMICAL ACID TREATMENT FOR RUSTY GUY WIRES

and our specialty **TOWER INSPECTIONS**



We can offer you the most complete tower, antenna inspection available at a cost only slightly higher than you are probably paying now for only relamping. Our tower inspections are not a hit and miss system. We use a complete 10 page Inspection Report booklet, with a checklist for each area on the tower. The actual inspections are performed by experienced tower men using the highest quality equipment for vertical alignment and guy tension measurements.

The Inspection Report Booklet will include photos of trouble spots on your tower, with full explanations and cost estimates on repair.

CERTIFICATES OF INSPECTION are issued along with the Inspection Report.

FROM OUR SATISFIED CUSTOMERS

"I would like to compliment you and your tower crew on the fine workmanship and coordination during the installation of our Gates 12-Bay FM antenna. The care and handling of this expensive piece of equipment made a great impression on all of us here at KRNT."

Charles F. Quentin (signature)
Chief Engineer
KRNT RADIO
Des Moines, Iowa

"Your inspection report is quite complete and tells me a lot more than any other inspection I have ever had on the tower in twenty years."

Keith K. Ketcham (signature)
Chief Engineer
WOI AM-FM-TV
Ames, Iowa

"The inspection reports arrived yesterday. They give a very good picture of the condition of the 2000 ft. tower, as well as the condition of our 300 ft. TV translator towers. A most complete and professional job! I am sure insurance companies would be happy to share such a report."

Alvin H. Smith (signature)
Chief Engineer
KTIV
Sioux City, Iowa

"It is a source of comfort for both myself and my chief engineer to know that we can count on you for fast service and a satisfactory job when the occasion arises."

Dick Painter (signature)
General Manager
KYSM
Mankato, Minnesota

Tiner COMMUNICATIONS SERVICE, INC.

P.O. Box 3827, Des Moines, Iowa 50322 (515) 278-5501

For More Details Circle (17) on Reply Card


THE COMPLETE VIDEO-AUDIO ROUTING SYSTEM

**...only Datatek
has all these features:**

- Choice of matrix building blocks—12 x 10 (breakaway audio), 20 x 10, 20 x 15, 30 x 10 or 30 x 15
- Independent, simple and flexible control facility for each bus
- Front access operational adjustments (input and output gain, frequency response, cable equalizing) with modules in normal operating position (not on an extender)
- All connections are plug-in
- Front access video, audio and power test points
- Four section continuously adjustable cable equalizers on *both* inputs and outputs
- Plug-in matrix PC boards are all front mounting and vertically oriented for unrestricted air flow
- Crosspoint latch feedback tallies (BCD) and source (camera) tallies brought out as standard
- Simple expansion facilities (video, audio, control, tally and power connectors) provided as standard
- Soft clamp provided for video inputs
- Differential (hum bucking) bridging video inputs with high return loss
- Two video outputs and two +24dBm (150 or 600 ohms) balanced audio outputs per bus
- Multi-reference vertical interval or random switching facilities for each bus
- Rear access audio level systemizing pad facilities
- Highest quality non-proprietary multi-source components used throughout

D
DATATEK
CORP.

1166 W. Chestnut St.
Union, N.J. 07083 (201) 964-3656

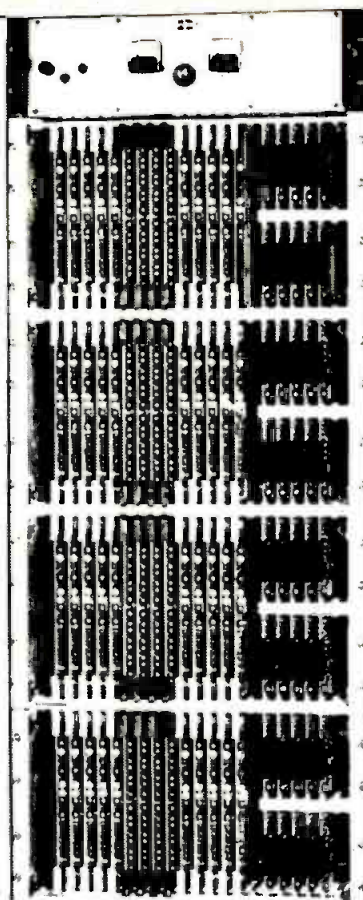

SBE

(Continued from page 20)

tors. (Bob Ingalls, Chairman, 5441-187th Avenue, N.E., Redmond, Washington 98052, (206) 543-7774).

Chapter 17: Minneapolis/St. Paul, Minnesota

On February 17, SBE members and their guests met in the Rarig Center at the University of Minnesota to hear Mr. Robert Seaburg, field engineer for Tektronix, give a demonstration of the Tektronix 1440 Automatic Video Corrector. Mr. Seaburg also brought two 650 picture monitors, a VTR deleter-inserter, a R146 sync. generator, a 1480R waveform monitor, and a R520A vectorscope for members to inspect at the meeting. (Lance Raygor, Chairman, Route 1, Box 337, Chisago City, Minnesota 55013, (612) 373-4807).

Chapter 20: Pittsburgh, Penn.

Members of Chapter 20 invited Mr. Terry Lloyd, of Time and Frequency Technology, Inc., to their regular noon meeting on February 19. Mr. Lloyd gave a slide presentation on their new two-tone EBS system which complies with the FCC Rules which just went into effect April 15. (Jim Hurley, Chairman, WTAE-TV, 400 Ardmore Blvd., Pittsburgh, Pennsylvania 15230, (412) 242-4300).

Chapter 22: Central New York

The February program for Chapter 22 featured a presentation by Bob Griffiths, of Telemet, who spoke on the parallel development of TV broadcasting and test equipment. Also, Mr. Alex Kwartiroff, Telemet director of engineering, discussed the application and use of TV demodulators and brought along one of their newer devices—a synchronous detector for TV demodulators.

In March, Mr. Terry Lloyd, of TFT, conducted an evening program on EBS: its purposes, interconnection, and operational procedures, plus a view of the TFT EBS gear.

Tentative scheduling shows that Chapter 22 invited Ampex to their April meeting to cover the subject of video data storage, and in May, Tektronix will present the evening's

(Continued on page 70)



SOCIETY OF BROADCAST ENGINEERS, INC.
P. O. Box 88123 Indianapolis, Indiana 46208

Application For:

- ☐ New Member
☐ Student Member
☐ Associate Member
☐ Change in Grade
☐ To Member
☐ Sr. Member

Check Preferred
Mailing Address:

NAME _____ TITLE OR OCCUPATION _____

() ADDRESS _____ CITY & STATE _____ ZIP _____

EMPLOYER _____ CITY _____ STATION _____

() ADDRESS _____ CITY _____ STATE _____ ZIP _____ PHONE _____

FCC LICENSES _____ OTHER TECHNICAL SOCIETIES _____

Please complete all blanks. Should you require more space please use other side of this application.

EMPLOYMENT RECORD: most recent first		Station or kind of business	Time Employed		Position or Duties
a. Employer	b. Address		From	To	
1	a. _____ b. _____				
2	a. _____ b. _____				

Total Years of Responsible _____ Field of _____ Radio _____ Television _____
Engineering Experience: _____ Activity: _____ Other _____

EDUCATION:

TYPE OF SCHOOL	NAME AND ADDRESS OF SCHOOL	COURSE	NUMBER OF YRS. COMPLETED	GRADUATE? DEGREES?	LAST YEAR ATTENDED
College					
Trade or Mechanical					
Corresp. or Night					

Two references familiar with your work:

	Name	Address	Occupation
1.	_____	_____	_____
2.	_____	_____	_____

Enclose \$15.00 (or \$7.50 for bona fide students). No action taken without Dues.

Signed _____ Date _____ 19 ____

I agree to abide by the Constitution and By-Laws of the Society if admitted.

ADMISSIONS COMMITTEE ACTION: _____ Date _____ Approved for Grade _____

Action Deferred for More Information _____ Candidate Notified _____

Chairman's Signature _____ Entered in Records _____

Be Sure To Sign

From BLUE BANANAS to SAG TAILS

Blue Bananas welcomes a twist or two from Edd (that's right, Edd) Monskie, the CE at WRBJ, St. Johns, Michigan. Edd writes that during his stay at WBST-FM, Muncie, Indiana, one of the newscasters fell into the old outcue trap.

One of the newscasters didn't remember to stay quiet after giving the outcue to his newscast. After giving the cue to the operator, he said to himself but out loud, "That was the _____ newscast I've ever done," only to discover that the board operator had left the mic on and his passing thought became a slice off the old blue banana.

One time I was helping co-anchor a half-hour newscast with a voluptuous blond. Her low, sexy voice almost equalled her physical appearance. The outcue of the news was pre-written with the names filled into blank spaces.

During the course of the news, our order was mixed up, so she ended up concluding the program, which was my ending. It ended with her saying, "I'm Edd Monskie with...." She finished the news exit professionally without even flinching, while another engineer and I were literally rolling on the floor with laughter.

Of course the wire services slip on the old peels, too. One wire summary told of how a Senator from Florida was being indicted for accepting \$10,000 worth of "brides".

Edd ends with a recent live, slippery short spot that should have been "Spartan Pot Pies" but went on the air as Spotan Part Pies.

The Trouble Is...

Closed mics that come open in the night have always been a source of trouble. A simple way to cut down this possible problem is to tie indicator lights to the switching circuits.

Girls, Girls, Girls, Yes, We Had Girls!

Our next item in the Blue Banana bunch comes from Danville, Illinois. We'll let Bud Sunkel tell his own story. It goes something like this:

This was in the late 1940's, early 1950's...when RADIO was RADIO. When PERSONALITY meant more than TIME AND TEMPERATURE, "and get it all said in ten seconds or less". I was the Sign-on, morning Personality DJ on WDAN, Danville, Illinois.

In those days, after a three hour DJ stint, you were bushed...you had to work, new material, some research, because people either listened or turned it off...with radio there was no "grey" it was black or white...you had ears and imagination...no tube to look at. But also in those days, in a small market station, and small staff, the "personal-



ity" man became a staff announcer for the balance of an eight hour work day.

In time, after my show, I found that during the 9 a.m. CBS news, I could catch up my program log... put away my records, wash my coffee cup, and be free to do one of two things...listen to Arthur Godfrey for 90 minutes and Oxydol on Stella Dallas, or go to where the action was...and the office girls, up in the carpet rooms. They all came in at 8:30 a.m. but by the time they removed snowboots, coats, combed

hair, updated last night's activity... they were ready for work by 9:00 a.m. too. Also, by this hour, Management had "hit the streets" apologizing for my errors of the morning...or the local doughnut shop...personally I didn't care, as long as they got on their way to permit me to be a "big man" with the girls in the front office. Arthur Godfrey was good for 28 minutes, 30 seconds per session, and with practice, I could ricochet off the walls and make it from the front office to the control room in 3.4 seconds...some of my handprints are still imbedded on the walls of WDAN.

Also, back in those days, holidays were celebrated on the actual anniversary of the event...such as Memorial Day...remember? Eleventh month...eleventh day...eleventh hour.

So at 10:00 a.m. my time, 11:00 EASTERN TIME I rejoined Arthur Godfrey and started my mad dash, obstacle course back to the carpeted front office while Arthur Godfrey was saying...

"How-Areya. How-r-ya....Since this is Memorial Day, what say we pause for 60 seconds in memory of this important day, and each of us, in his own way, take one minute of silence to say a prayer"...At this time, I started part two of a hot new joke, and only heard the dead, cold silence coming from the speaker in the hall...CBS must have gone dead. In my normal, or better speed, I got back to the Control Room to break in on the silence and blurt out.... "We have lost our network...please stand by.. we will return to Arthur Godfrey as soon as technical difficulties are corrected"...Music up and under....

Also, last visit to front office...no more mad dashes...and ya know, I found out, by necessity, Arthur Godfrey did do a pretty good show....I heard every one from that day on....

Send your Blue Banana to Blue Bananas, The Editor, Broadcast Engineering Magazine, 1014 Wyandotte, Kansas City, Mo. 64105.



FM BROADCAST TRANSMITTERS

FCC TYPE ACCEPTED



**DEPENDABLE AND EFFICIENT, WITH INNOVATIVE
DESIGN FEATURES FOR TODAY'S BROADCASTER**

For months we've been shipping transmitters—100 alone to the CBC in Canada. Now our 3, 5, 12 and 20 KW FM transmitters are FCC type accepted—and we're taking orders and shipping to U. S. broadcasters. Applications are currently on file for lower and higher power FM transmitters, and a full range of AM transmitters. Exciting things are happening at CSI!

- New design features increase efficiency, provide greater reliability, and reduce maintenance.
- All RF stages in separate shielded compartments.
- Sliding shorting contacts for tuning and loading. All tuning and loading adjustments from front panel.
- Grounded grid zero bias triode output stage for stability without neutralization.
- Solid state phase lock loop exciters.
- Output power directly adjustable from front panel without changing tuning or loading.
- Low voltage control circuitry for personnel safety. Provision for remote control standard. Control relays are front panel mounted for easy adjustment and replacement.

CSI ELECTRONICS INC.

2607 RIVER ROAD, CINNAMINSON, N.J. 08077

TELEPHONE 609-786-1060 • TELEX 831679

MANUFACTURERS OF AM AND FM BROADCAST TRANSMITTERS

Video Tape Recorders: A never ending revolution

Part 1 of a 2-part series/By Joe Roizen

The annals of science and industry are littered with the writings of two types of people, the thinkers and the doers. While conception obviously predates construction, there is no shortage of instances where the conception alone, although recorded in some periodical, is not reduced to practice and someone else, either simultaneously or at a later date, finally creates the device in question.

Video recording also had its thinkers and a diligent search of old patents and long forgotten books yields a few of these early concepts. It almost seems as if one searched far enough, one could find a crude drawing made by Leonardo da Vinci proposing a means of committing images to a medium.

The earliest chronological proposal for the use of magnetic recording to store pictures was found by the author in a book titled, "Handbuch der Bildtelegraphie und des Fernsehens" which was published in Germany in 1932, and which describes a series of schemes for picture telegraphy proposed by Dr. Fritz Schroeter, professor at the Berlin Technischen Hochschule and a director of Telefunken. The illus-

trations in the book quite clearly resemble present day transverse and helical scanning formats which are used currently for video recording on tape.

Some of these proposals date back to the late twenties, a period during which the British patent office also issued a patent to Boris Ritcheouluff of London who designed a picture recorder of considerable ingenuity based on the Valdemar Poulsen machine developed in Denmark at the turn of the century.

In 1938, an Italian inventor by the name of Luigi Marzocchi filed a patent application for a variety of rotary head recorders which were clearly intended for sound recording and so labelled in the patent. Nevertheless, the drawings are so amazingly similar to the arcuate and transverse video recording concepts which came later that the company which held the rights to Marzocchi's invention were prompted to consider legal action against Ampex after they commercialized their VTR.

Even as the Ginsburg group were developing the transverse recorder, a German engineer by the name of Eduard Schueller, working in Hamburg for Telefunken, filed for a patent on the 30th of June 1953 covering a two head helical recorder that is almost identical in concept to a few of the machines that were later produced in America, Japan and Germany.

There was an air of normal conviviality among the 200 station owners and managers attending the CBS television affiliates meeting that preceded the opening of the National Association of TV Broadcasters convention in the Conrad

Hilton Hotel in Chicago. As the delegates filed into the Normandy Lounge to listen to their headquarters manager, William Lodge deliver the annual report, they had no inkling that this April 14, 1956 meeting would expose them to one of the most unusual technical developments which would significantly alter television from that day forward.


It was not out of the ordinary at such gatherings to have a camera pointed at the podium and a few monitors set up in the room so as to convey the aura of television. If any of those in attendance noticed an unfamiliar high pitched whine, they probably assumed that it was due to a faulty fluorescent lamp or some external machinery.

Bill Lodge made his prepared presentation with what seemed like a pregnant pause at the end. Suddenly, the monitors in the room were showing what must have seemed to the audience as an impossibility, for they were looking at an instant playback of the Lodge speech, with an image clarity indistinguishable from the original they had seen a few minutes earlier. There was a hushed silence as those in the room tried to relate this assault on their senses, with their a priori knowledge that TV images could not be immediately repeated by any known device.

As the impact of what was happening before them sank in, the silence was broken by an equally sudden roar of applause, cheers, whistles, and stamping of feet. The curtain behind the podium opened to reveal a large gray console that looked like a gargantuan audio tape recorder, with overgrown reels of tape on its horizontal top plate.

This article is the first part of a 2-part series giving special insight into the history of VTR's, a history that began to unfold twenty years ago this month.

This series is a condensation of a paper Mr. Roizen delivered at the Sir Isaac Schoenburg Memorial Lecture for the Royal Television Society.

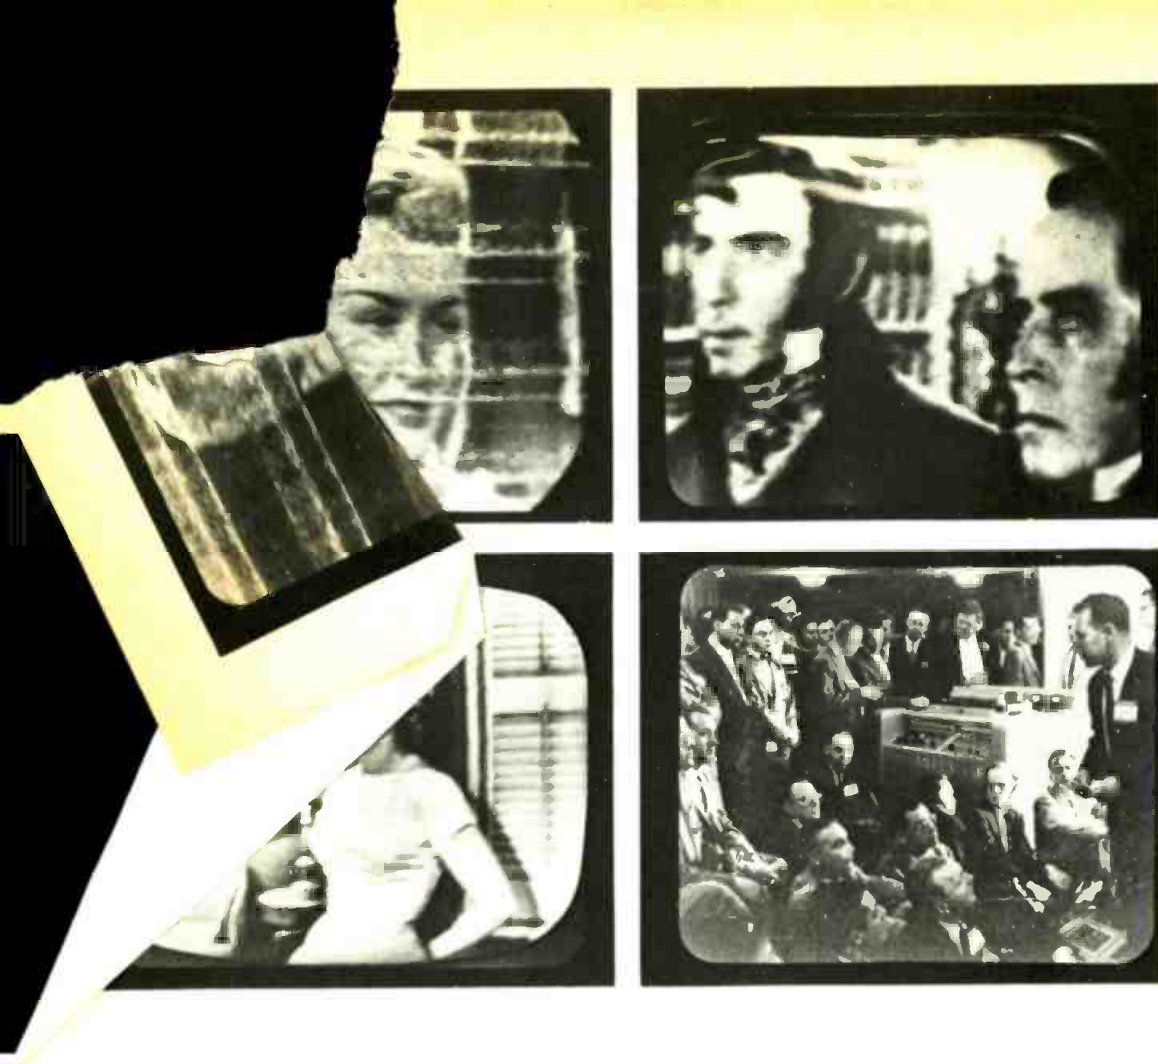

This set of photographs represents some very early pictures coming from tape. The upper left is from the first FM system, and there is plenty of distortion evident from banding effects. At top right is a better result obtained with an improved blanking switcher and better heads. Bottom left is the quality of the image coming from the first NAB machine in 1956. Bottom right wasn't really on any screen, but it does depict the setting 20 years ago when the VRX-1000 was introduced at the Conrad Hilton.

Hovering over this whirring magnetic monster, with looks of obvious relief, were a few of the engineers responsible for developing it.

With the presentation over, the normally staid and dignified executives from television stations all over the country crowded in around the VTR, trapping the operating personnel against the machine, while they pushed, elbowed and stood on chairs to get a glimpse of this latest video marvel.

The VTR crew, who just a few minutes earlier were holding their breath in the fond hope that this hastily assembled contraption of infinite electro-mechanical complexity would perform on cue, were now busily answering questions from excited interrogators who were naturally curious about performance, price and availability.

The prearranged plan had been to record the output of the monochrome camera covering Bill Lodge up to a certain cue point, then the machine was rewound and put into the "play" mode just as Lodge's comments ended. There was no available monitor for the team behind the curtain to check the playback before punching it up on the

TV screens in the other part of the room. As a result, they had to operate on the blind faith that everything was working well. That short silence at the beginning of the playback seemed like an eternity to Ginsburg, Dolby, Anderson and Pfost, four of the key members of the Ampex engineering team.

All the hardships, the concentrated efforts, the endless hours of work, and the frequent disappointments were suddenly swept away in the euphoria of success which triggered off an avalanche of videotape recorders that now permeate the entire television world and represent a billion dollar plus industry.

In the four days following, this small California-based company wrote orders for \$4,000,000 worth of their magnetic miracle, which represent one of the most expensive recording devices ever made selling at approximately \$50,000. Nevertheless, its obvious benefit to TV operations, at least in the program delay category, was sufficiently attractive to warrant the huge investment that the major networks hastily committed in order to equip themselves with VTR's.


A Calculated Risk

Taking a calculated risk, the company's founder, Alexander M. Poniatoff, followed the advice of his two top technical aides, Walter Selsted and Myron Stolaroff, and sponsored a research program to pursue the rotary head approach to video recording. The gamble paid off and videotape recording was launched into an ever expanding sphere of television importance and utility.

The story behind this scientific breakthrough is a fascinating one on a variety of counts. On the technical side, the diversity of opinion in the engineering community as to how to achieve video recording on a magnetic medium was very great. Large organizations, such as RCA, the BBC and others, were sufficiently convinced of the viability of the high speed, longitudinal approach that they were committing considerable sums of money to explore feasibility.

Before delving into the personal histories of the individuals involved and the contributions they made, it might be well to review the prior art in existence up to that revelation in Chicago in 1956.

This is a very early shot illustrating the segmented scan aspects of quad VTR's. The venetian blind effect is one of the many geometrical errors that were to become familiar to maintenance engineers. Skewing, scalloping and quadrature were new words added to the electronic lexicon.

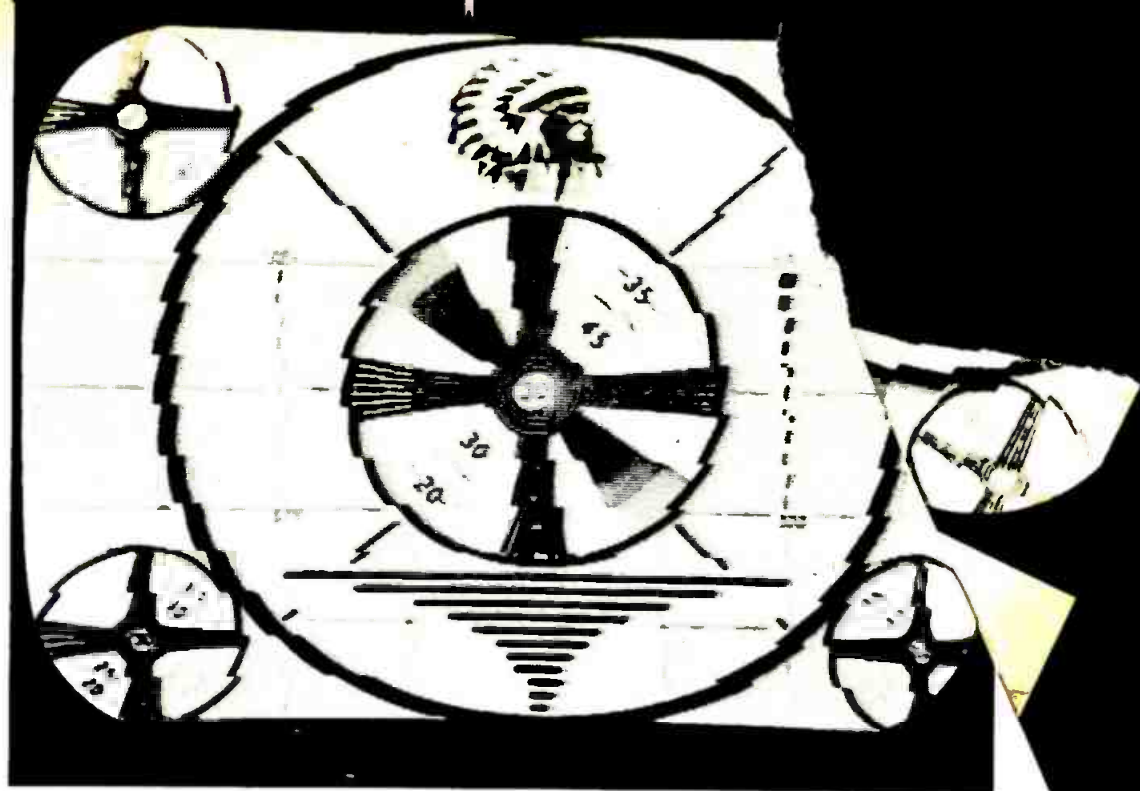

Extending Known Principles

While all of these esoteric prognostications had technical merit, they were too far ahead of existing tape and head technology to warrant much attention from serious experimenters in the field. Instead, the major efforts at that time (late forties, early fifties) were directed toward extensions of the known principles of magnetic audio recording by extrapolating those operating parameters into the region of video signals.

Four such known projects were going on, the best publicized one being at the RCA laboratories in New Jersey. Under the direction of Dr. Harold Olson, a man with an excellent reputation in the field of acoustics, a team of researchers built and demonstrated a series of longitudinal, high speed VTR's that made monochrome and color pictures.

RCA Innovations

The first laboratory prototype shown publicly in 1953 used tape one-half inch wide and ran at 30 feet/sec. There were five tracks on the tape and a 7,000 foot reel ran for 4 minutes. Subsequently, the tape speed was lowered to 20 feet/sec. and the playing time raised to 15 minutes. RCA felt confident enough with this advanced machine

to make some program demos at NBC in late 1955.

The RCA system reduced the incoming color video signal into its RGB elements, each of which went on a separate track, as did the synchronizing information. The fifth track carried the audio signal which was recorded in FM with a carrier and deviation of 90 kHz and plus/minus 15 kHz respectively. The stationary magnetic heads of one micron gap width could handle frequencies up to 1.5 MHz.

The RCA machine had many innovations that became fairly standard on subsequent VTR's. Tape tension servos, eddy current brakes, luminance/chrominance separation and sync reinsertion, familiar techniques today, were all part of these early recorders.

Clear across the country, in a well equipped lab on Sunset Blvd. in Los Angeles, another VTR project was under way, under the sponsorship of Bing Crosby. The famous singer's early relationship with the Ampex audio recorder and its rapid rise in popularity must have given him the idea that a similar breakthrough in video would be tremendously profitable. With the help of his brother (who was also his business manager), they set up Crosby Enterprises and hired John Mullin to head up a group of engineers who were to

pursue yet another technical approach.

The basic theory was to use division multiplexing with 10 channels covering the split up of the desired video frequency range. A bandwidth of 17 kHz per channel produced a cumulative spectrum of 1.7 MHz, adequate for monochrome reproduction. Sync was recorded on an eleventh track to avoid the distortion effects of the band separation filters.

By 1952 Crosby Enterprises were inviting broadcasters in to look at credible results of off air black and white recordings. There were, however, some severe picture impairments that would require much improvement before the recorder could be considered acceptable to broadcasters. After transverse video recording was introduced, the Crosby project was acquired by the 3M Company as their Mincom Division and was put to other recording tasks in the instrumentation field.

The BBC also saw the potential advantage of a vision magnetic recorder, and in 1952 assigned Dr. Peter Axon to lead a long-term effort in this direction. The machine was called VERA (Vision Electronic Recording Apparatus) and was quite different from its contemporaries. Many of the developments achieved in this re-

S-3000 Digital Framestore Synchronizer

Would take a wall full of equipment to handle the job DFS-3000 does in just 8.75 inches of rack space. In fact, every synchronous treatment needed for the full spectrum of NTSC compatible broadcast activities is literally at your fingertips in this light, rugged, fully portable system that goes anywhere.

Just check this list of available features:

- Two complete fields of store for full broadcast versatility.
- Infinite window TBC corrects time base errors on any VTR including ENG.
- Look Ahead Velocity Compensator cleans up color vectors on direct color VTR's for truer color presentation across entire picture.
- Video Compressor enables producer to insert second live image in any quadrant of screen.
- Joystick Control allows compressed picture to be positioned *anywhere* on screen.
- Broadcast Quality SPG permits synchronizer to be used as station reference.
- Memory Analyzer ensures system integrity.

- Frame or Field Freeze for special effects.
- Remote Control Panel for production flexibility.
- Synchronous clean-up of non-synchronous switches eliminates picture tearing and rolling.

All these features, and broadcast quality too, are packaged complete with power supply and analog circuitry in this fully modular system that weighs less than 60 lbs. Even more significant, power consumption is a mere 250 VA, keeping heat problems to a minimum.

For information on our demonstration program, call or write George Grasso, MCI, P.O. Box 10057, Palo Alto, CA. 94303. Phone: (415) 321-0832.



Micro Consultants, Inc.
DISTRIBUTOR FOR QUANTEL LIMITED

We pack more in here...



so you do less out there

This picture shows the first use of an Ampex VTR for an on-air broadcast of the Douglas Edwards news show.



corder served as departure points for subsequent helical VTR's that were developed later.

The half-inch tape moved at 16 feet/sec. and a 21-inch diameter reel gave 15 minutes of playing time. VERA was capable of a 3 MHz bandwidth, a significant achievement for its era in longitudinal recording. The fundamental approach was to separate the video signal into two bands: the first for all low frequencies up to 100 kHz, the second from 100 kHz to 3 MHz. Low frequencies were recorded by FM techniques while the highs were applied to the tape in AM form. The carrier of 700 kHz was modulated upward for sync pulses and downward for peak whites (the opposite of most present systems) and was deviated by plus/minus 300 kHz.

In playback, the two separate frequency bands were combined to produce an image good enough to put on the air in 1958. VERA had many unique features, among the most notable being heads made of ferrite cores clad with permalloy with a gap width of 0.5 microns and a closed loop tape drive system which held tape speed to 0.04% by locking to an external sync generator and comparing the sync off tape

with the reference source.

The BBC terminated the project when it became evident that the transverse approach, introduced by Ampex, would become the standard of the industry. As a matter of fact, Dr. Axon also recognized this potential and shortly after became Ampex's managing director of their Reading operation.

The Japanese Develop DESSAN

While little information was coming out of Japan in those days, it later became evident that several Japanese organizations were also experimenting with videotape recording. The longitudinal effort was called the DESSAN project and was named after an artistic technique which did the broad brush background first (i.e., low frequencies) and filled in the detail later (high frequencies).

In 1953, Toshiba was experimenting with crude helical scan systems, which five years later evolved into both single and dual head prototypes. The presentation of the first Japanese paper by Norikazu Sawazaki of Toshiba on helical recording, at the 1960 SMPTE meeting in Los Angeles, stirred up quite a controversy about the relative merits of basic VTR

formats which is still going on. It also caused Ampex to rush to completion an ill-fated two inch helical recorder (the VR8000) which was shipped in heavily sealed, locked boxes to the following NAB convention in Chicago. Flying different aircraft, Ginsburg and Maxey had the only keys to the locks. It was to be demonstrated only if a competitive broadcast recorder, with a helical configuration, was shown. There were none and the black crates were returned to Redwood City unopened.

Lest anyone wonder at this cloak and dagger scenario, it should be explained that fortunes were made or lost on Ampex stock, often as a result of rumor or innuendo. When Dr. William Glen of General Electric announced the first thermoplastic recorder, which he claimed would challenge the videotape position in television, the mere possibility caused a run on the market which took several years of subsequent evidence that the process was impractical for Ampex stock to recover.

Videotape recording had become big business, and like its counterparts in other high technology fields, it needed constant R & D to keep it ahead of the game. □

Tomorrows audio consoles here today!



THE BIGGEST ADVANCE OF AUDIO CONTROL IN THE LAST 15 YEARS . . .

Noiseless input select switches. Noiseless audition / off / program select switches. Noiseless audio mixers. Noiseless cue switching. Do these things make any sound at all? You bet! Probably the cleanest sweetest low distortion sound you've heard from any audio console regardless of price. Not only that but these babies are loaded with features that: (1) you will only find in consoles selling for 5 to 10 times more; (2) you'll only find in these consoles . . . period.

From our exclusive illuminated Touch Pad audio select switching, thru our, "better

than a VU meter", solid state light emitting meters, to the highly reliable & noiseless method of audio control. That's not all. Prices that are almost unbelievably low (compared to what you're used to) and performance that takes second place to none.

Want more? OK, how about RAMKO's exclusive SIMUL-Q or our full range gain select on each input, or the cue and monitor mute select patch boards on each channel (except the last one). The plug in amplifier cards or the RF suppression.

Call collect or write today. You'll find it both an exciting and profitable adventure!

MODELS & PRICES

SC-5M Single Channel, mono	. \$ 605
DC-5M Dual Channel, mono	. \$ 742
DC-5MS Dual Channel, stereo	. \$ 979
DC-8M Dual Channel, mono	. \$1,199
DC-8MS Dual Channel, stereo	. \$1,760

RAMKO RESEARCH

3516 C LaGRANDE BLVD.
SACRAMENTO, CA 95823
Telephone (916) 392-2100

For More Details Circle (21) on Reply Card

A painless slide into accuracy

By Joseph Kaspar/Maintenance Supervisor, WOR-TV, New York.

Why is it that no radio station would dare to go on the air without first thoroughly checking its output with VU meters, analyzers, and other assorted test instruments? Yet many smaller TV stations think nothing of starting their daily programming without giving a second thought to the qualitative output of their cameras by checking them against a calibrated source.

One of the most effective test aids used by engineers and technicians to set up their television cameras is the precision test slide. These slides are designed to provide all basic measurement information necessary for consistently meeting performance standards for both color and monochrome TV systems.

Patterns provided by the test slides are used as a reference in adjustment and performance testing by introducing a known standard and interpreting the results obtained. This is similar to the time-honored method for calibrating electronic test instruments by checking them against secondary standards, which themselves are checked periodically against primary standards.

Test slides and patterns have

been part of our daily routine from the beginning—and we've been in TV from its inception. They make it possible for WOR-TV to meet its performance standards—without which we could not survive as a major New York station.

The station's three small field cameras are also checked each morning before being turned over to the news crews. The test set-up consists of a color monitor, a rack-mounted Tele-Measurements test pattern illuminator, wave form monitor, and associated equipment.

I have found that four slides are sufficient to meet our needs for normal preventive and corrective maintenance. The four patterns we use at WOR-TV are Tele-Measurements' color registration slide, a custom high-resolution slide, a custom linear gray scale slide, and a color fleshtone slide. The slides are stored in the space provided on the illuminator front panel.

The three studio cameras are also checked each morning on an easel under actual studio illumination, using test pattern charts. The critical task of balancing the cameras is accomplished at the control monitor by a member of the video crew. With the four test slides and charts, the normal daily check-out of a camera will take about 10 to 15 minutes.

WOR-TV broadcasts baseball and football games regularly from Shea Stadium, and special techniques have been developed to check out the field camera used at the ball park. Fixed locations, such as the center field scoreboard, provide reference points for aligning cameras, but in general, the procedures are the same as those employed for working with the studio cameras.

Test slides are available in a variety of patterns, which provide reference standards for virtually all

color and monochrome equipment needs. At WOR-TV the four most widely used are the patterns for setting resolution, linearity ball, registration, and gray scale. A description of how each test slide is used follows.

Resolution Test Pattern TM-102 is standard reference for measuring resolution, testing for streaking, interlace, shading, scanning linearity and aspect ratio and was originally developed for the Retma chart of 1956. Resolution is the total number of white-to-black transitions that a camera can distinguish across a predetermined area. The higher the ability of the camera to resolve, the greater the apparent focus or sharpness of reproduced image.

Limiting resolution is measured by observing the wedges of the pattern on a high-quality monitor and noting the reading at the point where lines are no longer discernible. The slide provides horizontal and vertical wedges with resolution of 200 to 800 lines. Center and corner resolution are measured separately. Vertical wedges provide the measurement of horizontal resolution, which is a function of pick-up capability, video amplifier band pass, and beam spot density. The horizontal wedges measure vertical resolution—a function primarily limited by the number of scanned lines provided in the system. This is normally 525 lines at a 30-frame per second rate.

Shading and gray scale responses are determined by displaying on a wave form monitor the mid-scale gray background and shading scale or chips around the center resolution wedges. When uniformly illuminated, the pattern will be seen as a flat background on the wave-form monitor at line and field rates. The gray scale provides a guide to measure the ability of the camera to differentiate shades from

Reference standards mentioned in this article are available as follows:

1. IEEE Standard 202 from I.E.E.E., 345 East 47th Street, New York, N.Y. 10017.
 2. EIA Standard for Broadcast Television RS-170 from E.I.A., 2001 Eye Street, N.W., Washington, D.C. 20006.
 3. EIA Standard for Closed Circuit Television RS-330 from E.I.A., 2001 Eye Street, N.W., Washington, D.C. 20006.
 4. "Specification for Gray-Scale Operational Alignment" from Tele-Measurements, Inc., 145 Main Avenue, Clifton, New Jersey 07014.
-


Next time you want to tote a lot of light, tote a Mini King!

ours: theirs:

Performance at 10 ft. with 1kW 3200°K lamp. Doors 200° open.	133 f.c.*	64 f.c.*
light control	4 way removable barndoors	2 leaf reflectors
price	\$64.00	\$65.00

*Photometric data in room with black walls and ceiling (test it yourself and see).

For more
information
contact:
Berkey Colortran
Department BE-476
1015 Chestnut St.
Burbank, CA
91502, U.S.A.
Tel. 213 843-1200
Telex: 677252
or contact:
Berkey Colortran U.K.
Department BE-476
P.O. Box 5, Burrell Way
Thetford, Norfolk
IP24 3RB, England
Tel. Thetford 2484
Telex: 851812944

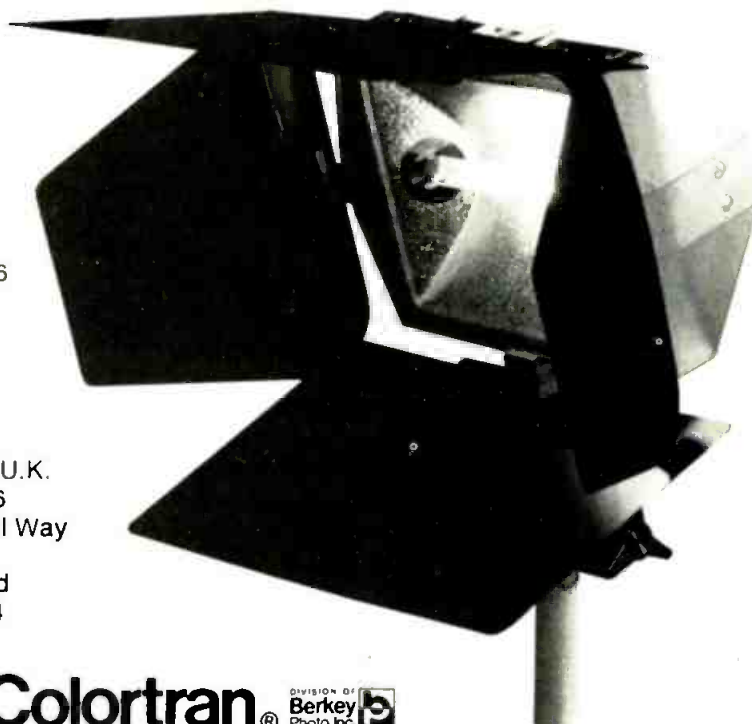

Berkey Colortran® DIVISION OF **Berkey** Photo Inc. 



The author checks out one of WOR-TV's cameras with a rack-mounted test pattern system. The Akai camera on the tripod is focused on the test pattern, projecting it onto a color monitor screen for comparison. Monitor also shows black-and-white picture and waveform.

This is a standard resolution test pattern for measuring resolution and checking for streaking, interlace and scanning linearity. The pattern was developed originally for the RETMA chart of 1956.

black or white. Accurate measurement of linear transition should be made, using a response chart approximating that of the pick-up tube characteristics.

Interlace errors are indicated by a displacement of the line bursts outside of the central pattern and by intersecting lines in the central area of the pattern. On modulator-equipped cameras, beam alignment may be adjusted by using the center concentric circles and varying the beam alignment to achieve minimum ringing on heating action. A tail of white or black on the top and bottom bars of the chart is a sign of streaking or smearing. This condition indicates a frequency response problem in the camera system. Linearity may be checked by observing the symmetry of circles on the pattern on a monitor

of known performance characteristics.

Distortion Testing


The linearity ball pattern is used to accurately measure the geometric distortion of camera sweeps. The distortion may be quantitatively determined, regardless of the characteristics of the monitor used for display, by following this test procedure.

With the camera positioned on the ball pattern, superimpose a cross-hatch generator producing a line pattern of 315 kHz horizontally and 900 kHz vertically over the camera output, and observe on a monitor. If all the lines intersect in the white center area of the "donuts," the linearity is within 1% of the picture area. If the lines intersect anywhere in the black area, the linearity is within 2%.

Should the lines cross outside the circle, the distortion is more than 2%, which is higher than that acceptable according to EIA standards RS-170 and RS-330.

When adjusting color cameras, set up the green, the luminance, or the recommended reference channel using the aforementioned method. Then match the other colors to it, using the registration pattern.

The registration pattern is used for adjusting the coincidence of images on multi-tube color cameras. Once the reference channel linearity has been properly set-up, the other channel is superimposed over it and adjusted to match it, following the camera manufacturer's recommended alignment procedure. Registration should be observed on a high-quality monochrome monitor with an approximately 17-inch dis-

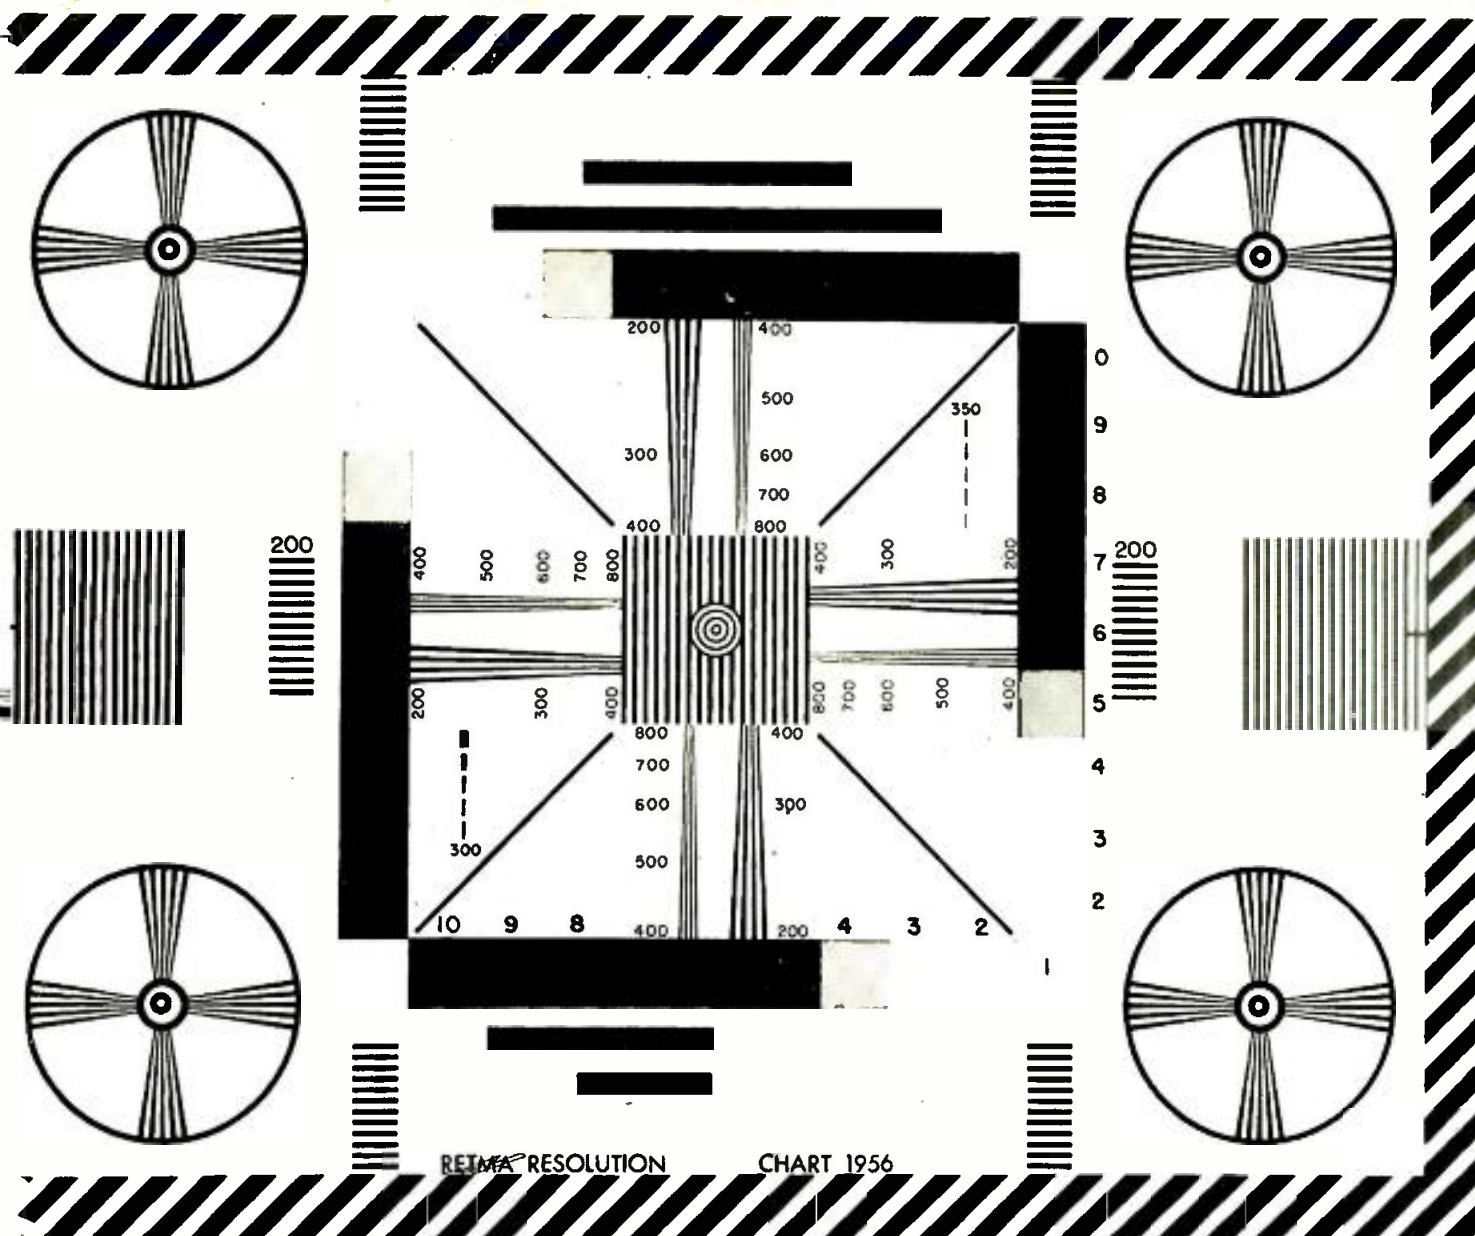

play. If the camera has provision for inverting the reference channel, it will make critical matching easier to accomplish.

The gray scale pattern checks the light-to-signal transfer characteristics of television camera pick-up and processing. The pattern will reproduce a pair of crossing stair-steps on a waveform monitor, corresponding to the response of predetermined reflectance density of textured chips. By selecting the appropriate scale progression for the pick-up response of the tube, an accurate determination of gamma, gain, black level, and color tracking can be made.

Tele-Measurement test-pattern slides are available in two sizes. The 2" x 2" size is for use with film chains, slide projectors or direct-coupled equipment. The 8" x

10" size is employed with test pattern illuminators. The latter provides for critical camera testing without need for support lighting. The test patterns also are available on 18" x 24" paper charts for use under normal scene lighting.

Accurate Pattern Placement

Positioning accuracy is important when adjusting or performance-testing the TV camera system. The camera optical axis must be perpendicular to the plane of the test pattern. The distance from the camera to the test pattern is a function of the test pattern format and the focal length of the lens.

Unless specified otherwise in the camera manufacturer's instructions, a simple test method is to reduce the monitor sweep so that the raster

edges are visible, and then under-scan the camera to allow the circular edges of the tube to be viewed on the screen. Set the image size on target using the normal lens or focal length, if equipped with camera zoom.

If necessary, truck the camera to adjust the image size so that the outer corner of test pattern touches the pickup edge. Finally, adjust the camera sweeps to fill the screen horizontally and vertically using standard alignment procedure.

Precision test slides with an illuminator or diascope should be part of test "tools" in every TV broadcast station, CCTV studio, and college TV training facility. It assures meeting performance standards with easy-to-use test methods that will save much time for both the operator and engineer.



This photo shows the "audiolarm" mounted on the ACR-25 left control panel.

HELP! I've Got A Problem

By Elmer T. Schorle, Jr.

Equipment manufacturers supplying broadcasters most often fill the basic need for that type of gear very well, but sometimes those using the equipment come up with minor additions, or modifications that tend to further improve an item, as it interfaces with their particular plant or system of operation. Were the manufacturer to try to anticipate the variety of alterations that might make his product fit each individual installation, and incorporate each, price and complexity would quickly become burdensome.

Ampex's ACR-25 Videocassette Recorder is one item that has in-

corporated what would at first seem every feature imaginable to our needs, for now and the future, with it's many automatic functions, random access programming, and ability to interface with complete automation systems. But even it, in day-to-day use, started thoughts towards little changes to help it either become easier to service, or more adaptable to the use we had for it.

I had previously documented the addition of LED indicators aiding diagnosis of mechanical switch performance (March issue of BE) which quickened trouble-shooting. The following is another alteration which tended to improve reliability and adaptability, as the ACR-25 fit into our system of operation, and which others might find useful.

Calling For "HELP"

Often the ACR-25 is called on to perform in a relatively unattended state, once it has been loaded, programmed, and assigned to the "on air line" automation systems. If something malfunctions, it will go into a "Test" mode, with lamps signifying the trouble. Unfortunately, nearby personel may not become aware that trouble exists until too late when nothing appears at an appointed time.

To alert operators to the fact that the ACR-25 needs attention, and has gone to the test mode, we have added an Audio-alarm to each of our machines. The alarm emits a beeping tone when there's trouble. This simple system has saved many air spots when alerted

YOU ASKED FOR IT. AND HERE IT IS.

Announcing the first COMPLETE FM Proof Manual ever offered.


Here's everything you need to comply with the FCC's annual proof-of-performance test. Every procedure, every detail is spelled out *step-by-step* in simple, concise language—all reviewed by the FCC. You save time, money, headaches—and you're sure of doing it right the first time.

Broadcast Engineering's FM Proof-of-Performance Manual includes *all* required logging forms for pulling *both* mono and stereo proofs. A complete chapter on FCC Rules. Dozens of helpful troubleshooting tips and time-saving measurement and logging techniques. Detailed procedures on how to *pre-test* your station before pulling the Proof. And more.

Your FM Proof Manual shows you

- how to prepare the test equipment
 - how to connect the test equipment
 - an efficient method of measurement and a look at the performance requirements
 - how to use the data summary sheet and evolve the graphs
 - how to comply fully with FCC rules and standards
- PLUS...you get individual *replaceable* forms for completing the equipment performance tests.

All this in one package. And all for \$6.95

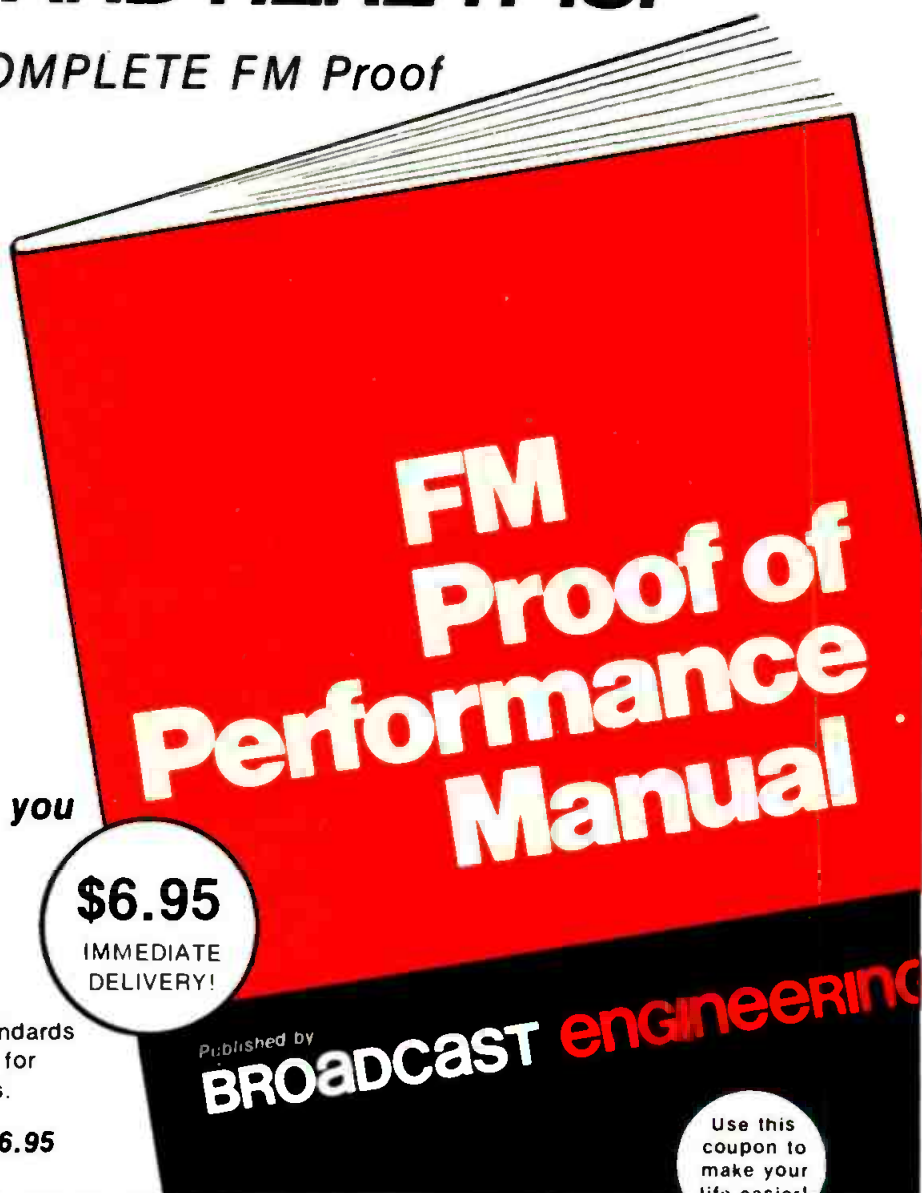

Use this coupon to make your life easier!

SPECIAL OFFER!

Order Both Manuals AND SAVE!



ONLY \$12 for both!

Over 1,000 AM Manuals now in use

Volume discounts available on request.

BROADCAST engineering®

1014 Wyandotte St., Kansas City, Mo. 64105

- ☐ Please send me _____ copies of the FM Proof-of-Performance Manual @ \$6.95 each
- ☐ Please send me _____ copies of the AM Proof-of-Performance Manual @ \$6.95 each
- ☐ Please send me _____ sets of the FM and AM Proof-of-Performance Manuals @ \$12 for BOTH.

☐ My check or money order is enclosed

☐ Please bill me


Name _____

Address _____

City _____

State _____ ZIP _____

NOTE: Broadcast Engineering pays the postage on all orders!

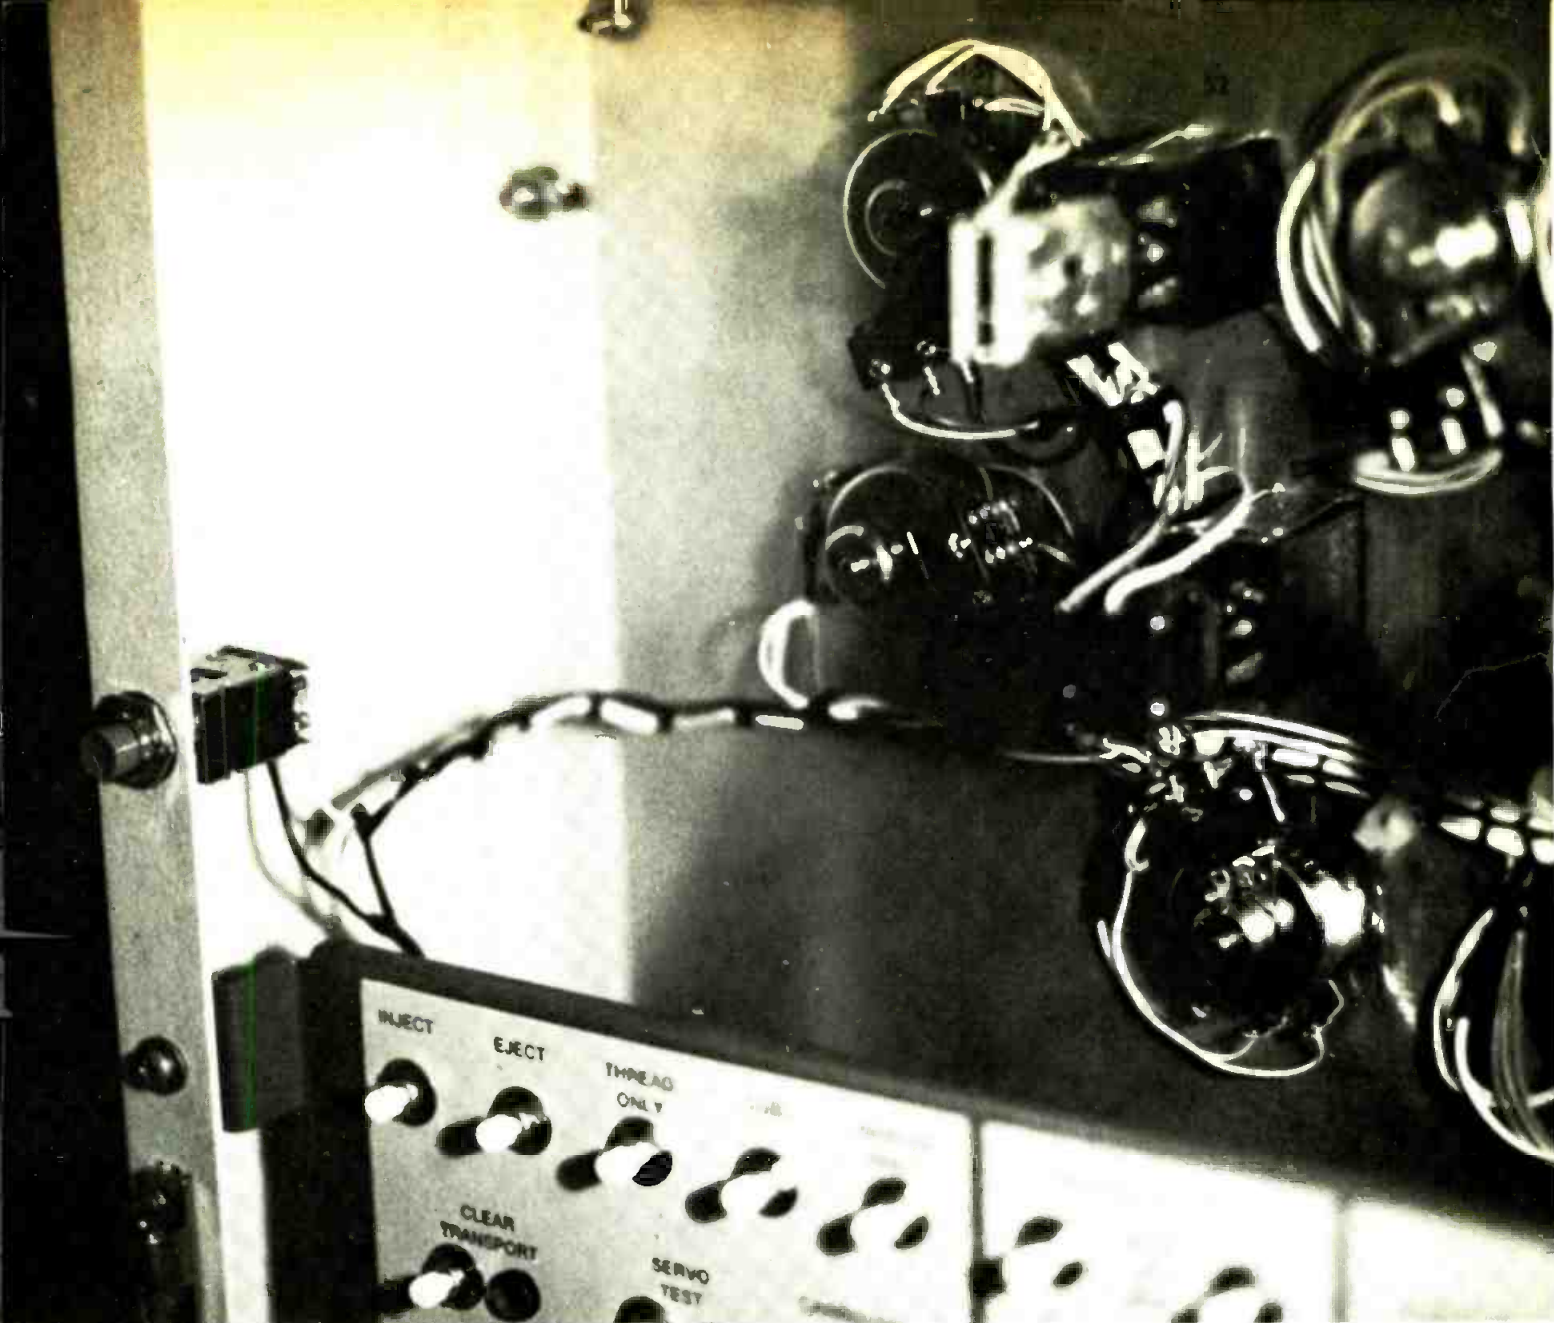

This view shows the alarm muting switch on the door edge near the test panel.

operators quickly rendered aid to correct a mis-thread or other fault. Several 3- and 4-spot breaks have been completed by quick thinking technicians while still in the "Test" mode, after being called by the alarm.

Equipment Requirements

The equipment required is one Audiolarm beeper (#AL-175, Floyd-Bell Assoc. Inc.), one Microswitch #2PB11 (same as a VR2000 brake release switch, Ampex #120-057), and one 6-32 machine screw 1" long, with matching nut.

Our alarm is mounted in a 1-1/8" round hole, centered below the tape speed pushbutton, on the

ACR-25 left secondary control panel. (See accompanying photograph). The alarm will operate from a logic level signal, or 28 volts, but since wiring was more easily facilitated with the 28 volt source, the logic level leads were clipped and sealed with shrinkable tubing, and connections made to the screw tie points of the alarm. The alarm is connected parallel to the lamp in the TEST push button on the Test Control Panel, with the positive wire routed through the normally open contacts of the microswitch.

This switch (see photograph) is mounted on the rear edge of the control panel door, and serves to mute the alarm when the operator opens the door to gain access to the

Test panel (it being very hard to think with that noise in your ear).

Connections #1 and #2 on the Test lamp/push button are used, with #2 the plus voltage source.

Finally, the machine screw is placed in a tapped and threaded hole in the ACR-25 center panel, positioned to actuate the switch when the control panel door is closed. The secondary panel front dropping cover can be left in place, as the alarm seems to echo louder with it closed than open, and can be heard throughout our operating area.

It is but a simple addition, but it has paid it's way many times by calling immediate attention to problems. □

For Better Program-Audio Back-Haul



Now there's Farinon's New 4.5-MHz Aural Carrier

It's the newest option available with the FV41 FM Transmission Channel System.

It gives you crystal-controlled frequency stability of ± 200 Hz, to help maintain precise 4.5-MHz picture/sound carrier separation, along with the low distortion, low noise and excellent frequency response of the FV41 system. And, it includes low-pass filtering to clean up the spectrum above 4.2 MHz before putting your audio signal on it. That's typical of Farinon's attention to detail.

A natural companion-piece is Farinon's SS12000 Baseband Microwave, the easy-to-install, dependable system with the 9-dB re-

ceiver noise figure that has become the competitive standard. It's also the system that allows proof-of-performance testing with a standard 550-MHz counter instead of an expensive 13-GHz counter.

Or, put your back-haul on Farinon's fine FV Heterodyne Microwave. Either way, for details on Better Back-Haul, contact . . .

Farinon Electric, 1691 Bayport Ave.,
San Carlos, California 94070, U.S.A.
Tel. (415) 593-8491. Telex 34-8491.

In Canada: Farinon Electric of Canada, Ltd.,
657 Orly Ave., Dorval, P.Q. H9P 1G1, Canada.
Tel. (514) 636-0974. Telex 05-82-1893.

Farinon

For More Details Circle (23) on Reply Card

Small Market Radio Is Alive And Doing Well

By Dennis Ciapura

This is the story of a radio station in a small town with a big heart. In a way, it's the story of several thousand radio stations that dot this great land of our's and really represent American radio.

If you work in a small market, this story may have a familiar ring, for your station probably has a lot in common with WRMS. While the super-stations in the major metro hubs may serve millions of people in one fell swoop, it's the thousands of little stations that bring radio to most of the country.

It's always interesting to take a look at the big stations and see what's newest, biggest, tallest or just about any other kind of "est" that big radio folk delight in, but let's spend a little time in reality and see what makes good old hot dog, apple pie and Chevrolet's radio click.

On a beautiful stretch of the Illinois River about 75 miles south of Peoria, sits the town of Beardstown Illinois, population 6100. Like many Illinois towns, Beardstown shares in the Lincoln heritage and is proud of it's history. The famous Duff Armstrong murder trial in which Lincoln won his first important case as a young lawyer, took place in Beardstown and the courthouse/museum commemorates the event.

The town's name comes from its founder, Thomas Beard, a German immigrant who settled there over one hundred and fifty years ago. It

is in this setting that Beardstown Broadcasting, WRMS AM/FM makes its radio home. WRMS AM went on the air in 1959 with 500 daytime watts from a two tower directional antenna system. For many years this facility was the town's only radio station, but in December of 1975 WRMS FM signed on and nighttime radio service was initiated in Beardstown.

The importance of the addition of the FM to the town is best reflected in the fact that the station has covered over 60 basketball games alone during the season just past. Since most of these games are played after local sundown, the AM never had an opportunity to provide the town with what, in this part of the country, is an important community service.

The new FM is a class "A", radiating 3 kw at 300' HAAT, and gets out very well over the flatness of the central Illinois geography. The station's studios are located right on Main Street, not far from the river and across the street from the Beardstown Post Office. Although the main industry in the community is agriculture, several large businesses are operating in the area, like Oscar Mayer and Trinity Steel, which have plants there, as well as many others like Bohn Aluminum, and Alton Box Board. Kent and Critic feeds are made there, and the Illinois Glove Company is busy making guess what.

It seems a happy blend of quiet

agriculture and modern industry on mile #88 of the Illinois River, providing between one and two hundred thousand dollars a year in radio revenue. While those figures may look more like monthly income for major market operators, it's quite possible to run a nice community oriented radio business within the framework of that income and that's really the story behind the scenes at WRMS.

A great part of the efficiency that has helped WRMS grow is based on a multi-talented staff. The station operates with a full time staff of four people and a part time complement of four. Just about everybody at the station has an FCC license and does something on the air as well as performing some management or administrative function. It sounds hectic, and often is, but each staff member is afforded an opportunity to grasp "the big picture" and get a real feel for what makes radio work.

Station manager, John Conner, has a First Class FCC ticket and is the sales manager, head of the news department and sports director. These are not merely titles, but functional descriptions of what John actually does. He is on the air with live newscasts several times a day and handles the play-by-play for the sportscasts, and quite well we might add, along with selling ads and sponsorship and supervising the day-to-day operation of the station.

John started with WRMS when



The studio building of WRMS is in the heart of Beardstown. That's Main Street, of course.

still in high school at age 16, in a pioneer vocational work/study program at Beardstown High. John was the first of the vocational students in the new program and worked at the radio station in the morning while attending classes in the afternoon.

He went on to study for his First Class license and has worked full time at WRMS ever since. John was promoted to station manager in 1972 and has steadily increased the station's business with a program of community involvement and an intelligent sales effort.

The chief engineer is Art Zeeck, a busy fellow with 64 years under his belt and electrons in his blood. Art joined the staff in 1970 and like most of the staff, handles an air shift as well as his engineering duties. Art is one of a couple of guys in town who can be called upon for advice on just about anything electrical or electronic in nature and seems willing to give anybody in town a hand. He is also a volunteer member of the Beardstown rescue squad which has grown into quite an efficient emergency unit.

Art's primary function is to supervise four part time and one full time operator who are working under provisional permits while they study for their permanent FCC tickets. He also maintains the AM and FM transmitters as well as the studio equipment on Main Street. The transmitters and antennas for AM and FM are at separate loca-



Inside the WRMS studios there's an atmosphere of station pride and community service. It may be relaxed, but it's serious business for the Conners, shown here working out the details of another day on the air. Susan Pilger, looking on, also handles an air shift.

Kevin Sager brightens up the morning show. In the WRMS production studio, Brenda Carlock punches a cartridge in and begins her day.



tions; the AM about a mile south of town and the FM about 5 miles north near Frederick. There's just enough travel between facilities to keep things busy.

June Conner, John's wife, is the station book-keeper and traffic supervisor as well as salesperson. She is also the public affairs direc-

tor and makes a point of covering any important town meetings and functions to represent the station. Two girls on a work/study program from Beardstown High, Brenda Carlock and Susan Pilger, help June in the office as well as working on the air.

Kevin Sager is the fourth full

time staffer and is the station's mid-morning and afternoon man. Kevin, 23, along with Bruce Boston, a Beardstown High junior, and Mike Yost, a senior, form the balance of the air staff.

The AM and FM simulcast an up-tempo rock/MOR format in the daytime, while the FM runs sports

Video-Type by 3M.

DIRECTOR: Edgar
VIDEO-TYPE BY:
John Young & 3M

.....
SMOKING...THE
PUBLIC HAZARD!
.....

Shown above is Datavision "Piper Roman", using Upper and Lower Case Fonts, 28sl.



Today, more Datavision D-3000 Character Generators are bought for their character quality...than their low cost.

Now supplied with multiple type fonts at no extra charge. OPTION A — Piper Roman (a classic serif face), Regular Caps, 28sl and Small Caps, 20sl; plus Upper and Lower Case, 28sl. OPTION B — Video Gothic (a modern san-serif face), Regular Caps, 28sl and Small Caps, 20sl; plus Upper and Lower Case, 28sl. OPTION C — Both Piper Roman and Video Gothic faces in Regular Caps, 28sl and Small Caps, 20sl. FEATURES: • GRAPHIC ARTS CHARACTERS • 4-PAGE MEMORY • 2-CHANNEL DISPLAY • CHARACTER EDGING • OPTIONAL 1,000 PAGE MEMORY • & MORE.

Get the facts and a free on-site demonstration. Call or write today. Datavision Video Products, 3M Company, 15932 Shady Grove Road, Gaithersburg, MD 20760. Phone: 301-948-0460.

Datavision Video Products **3M**
MINCOM DIVISION COMPANY



remotes and easy listening music in the evening. This varied format gives the station the diversified programming necessary for a small community and the announcers experience with several types of air work.

The studios are equipped with mono Gates equipment with enough

flexibility to allow for expansion. The station is looking forward to installing stereo gear in the near future as a continuation of the station's policy of turning economic expansion back into increased service to the community.

The studio and AM gear is the original station equipment from

1958, but in typical farm country frugality, has been meticulously maintained and kept serviceable. The FM transmitter is a new CCA 3000D, which was installed in December of 1975. The addition of new stereo studio and transmitter equipment will bring the FM side right up to the state of the art. In a

For mono, stereo . . . AM, FM, TV

ONLY FIDELIPAC® GIVES YOU A CHOICE




MODEL 300

The most popular NAB cartridge . . . performance and price make it the mono broadcaster's first choice.



MODEL 350

For use in stereo machines with inadequate tape guidance. The precision is provided by adjusting the cartridge.



MASTER CART

For the modern stereo broadcaster satisfied with nothing less than the ultimate in performance.

AND, for extended play, there's Fidelipac's Models 600 and 1200. For details, contact your Fidelipac Distributor or



FIDELIPAC®

109 Gaither Drive • Mt. Laurel, NJ 08057
(609) 235-3511

© Trademark

For More Details Circle (25) on Reply Card

There's no one system for every communications problem



We turn on voice messages when dependable voice communications are critical. That's when David Clark Company's Communications Systems offer reliable solutions.


Because your communications problems vary, so do our Intercom Systems, modules and headsets. We'll tailor a system to solve your every voice message problem. Our compatible modules provide the building blocks for custom intercom installations.

From missile sites to theaters, large construction jobs to remote oil drilling sites, TV studios to shipyards, our Intercom Systems help you hear while suppressing ambient noise.

For more information, call or write today.

from "the quiet people" at

David Clark COMPANY
INCORPORATED
370 Franklin St., Worcester, Mass. 01604

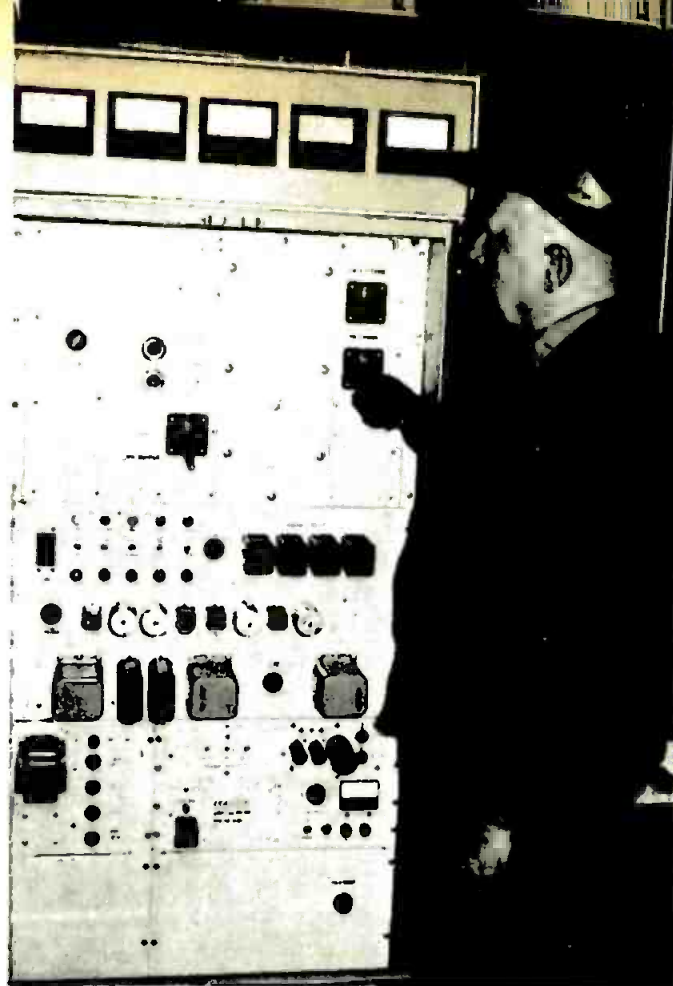

Chief Engineer Art Zeek tunes up the new FM transmitter, and the day is officially underway. Throughout WRMS, there is a professional, yet personal approach to broadcasting that is the hallmark of any successful station.

town like Beardstown, programming and technical improvements do not go unnoticed for long because of the one-to-one relationship between the station and the community, and that provides a real incentive for the station to make improvements whenever possible.

Large market residents often think of small towns as places where people grow up on farms and then move to the big city leaving the old home town to the dogs. This is largely untrue of course. Mrs. Conner's folks, the Carls, are proud to point out that their grandchildren are the seventh generation

brought up in the community. Small towns with good transportation (Beardstown has river, railroad, highway and air) are always attractive places for new industry and just plain nice places to work.

Too many engineers and announcers turn away from small markets because they can't see beyond the bucks to where the values lie. In this Bicentennial year, we think it's particularly appropos to take a second look at the small business aspects of our broadcast industry and the American spirit of individualism that still abounds there. □

How About Your Station

BE went to Beardstown to spend a day with a small market station. Too often we think only of the giants. At WRMS we found a successful station, a proud dedicated staff and a reminder that small market is alive and doing well.

For More Details Circle (26) on Reply Card

SBE

(Continued from page 22)

program. (Gary Hartman, Chairman, WSYR, 1030 James Street, Syracuse, New York 13203, (315) 474-3911).

Chapter 26: Chicago, Illinois

Chicago SBE members met February 18 at WTTW, Channel 11. First, Mr. Don Mesquita, of TFT, gave a review of the new EBS Rules and the equipment needed to comply on April 15. He also showed some of the manufacturing steps necessary to ensure long life and reliability of current electronic equipment.


Mr. Larry Ocker, chief engineer at Chicago's PBS educational station, WTTW, then invited everyone to tour the facility and to enjoy the refreshments. He spoke of the changes that took place when the production people wanted to convert to stereo programming by using a local FM station along with WTTW. The audio fax had to be extensively revamped both in the studios and the VTR room. Audio Design was chosen as the supplier for the new stereo console, and their representative, Bob Bloom, was present to speak from the vendor's point of view, on their design concepts, and how WTTW's problem was solved. Mr. Al Skierkiewicz and John Kenamer, of the WTTW staff, talked about the new concepts from the maintenance and mixers' position, and how the operational aspects were handled. VTR excerpts of some of the shows done with the new setup were shown, utilizing the big-screen projection unit. (Bob Churchill, Chairman, SBE, 121 W. Wacker Drive, Chicago, Illinois 60601, (312) 729-5215).

Chapter 32: Tucson, Arizona

Mr. Terry Lloyd from Time and Frequency Technology, Inc., presented an informative program with slides on the subject of EBS. He explained the interconnections and operational procedures of EBS and the manufacturing techniques adopted by TFT for producing EBS equipment, including 100% I.C.

(Continued on page 68)

Send only
the best.

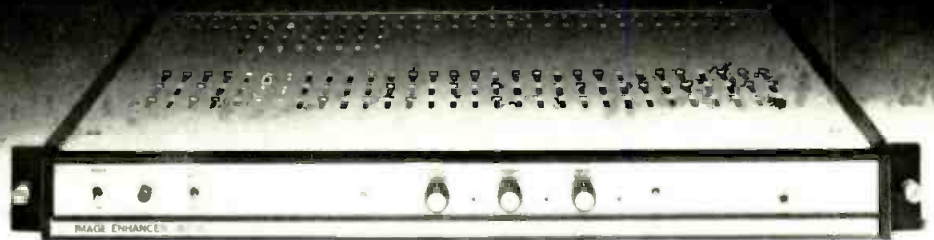

Thomson-CSF Laboratories Mark IV Image Enhancer is preferred by most TV stations. Because it sharpens both vertical and horizontal detail. And improves picture resolution as well as color fidelity. The Mark IV, with unique "crispended-comb" filter, separates chrominance from luminance, providing sharper contrasts with more defined picture detail. Available for all monochrome and color cameras. Now from Thomson-CSF Laboratories.




THOMSON-CSF LABORATORIES, INC.

37 Brownhouse Road, Stamford, Connecticut 06902
(203) 327-7700/TWX (710) 474-3346

For More Details Circle (27) on Reply Card

PERFECT TIMING

Low Cost ESE Right On Timers

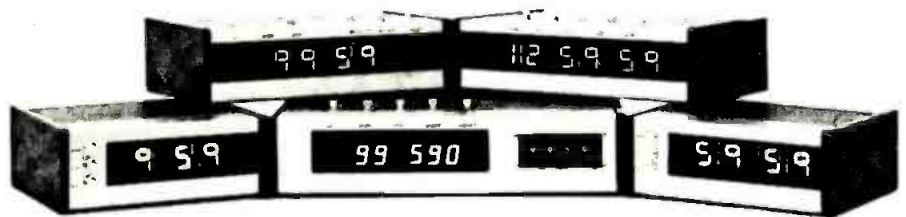

- | | |
|---|----------|
| ES-300: Four digit incandescent display, one hundred minute timer (99:59) with six controls: Count Up, Count Down, Min-Set, Sec-Set, Stop, Reset. | \$168.00 |
| ES-301: Identical to ES-300 except with planar, gas discharge display. | \$185.00 |
| ES-302: Equivalent to ES-301 plus fast-set lever wheel programming. | \$238.00 |
| ES-400: Three digit ten minute timer (9:59) with Start, Stop, Reset. | \$ 98.00 |
| ES-510: Four digit sixty minute timer (59:59) with Start, Stop, Reset. | \$125.00 |
| ES-500: Six digit, twelve hour combination clock/timer with five controls: Start, Stop, Reset, Fast Advance, Slow Advance. | \$150.00 |

STANDARD OPTIONS AVAILABLE: Kit; Slave; BCD Output; Remote Connector; 6' Remote Cable and Pushbutton Set; 220V A.C., 50Hz; 9" or 19" Front Panel 3½" high; 3 Wire Cord and Molded Plug. Tenths of seconds are available on all timers except the ES-500. Relay Contact Closure at Zero and/or Stop at Zero available on ES-300, 301, and 302. Crystal Timebase available for ES-500. Custom options and special orders available.



WRITE, WIRE OR CALL TODAY

505½ Centinela Avenue • Inglewood, California 90302 • (213) 674-3021

What To Do Until The Doctor Comes

By Peter Burk/Chief Engineer, WQUA, Moline, Ill.

Whenever the transmitter circuit breaker makes a dull thud, it's usually accompanied by another dull thud...right in the engineer's stomach!

The transmitter has the nearly singular ability to keep us off the air for long periods of time. As a result, we sometimes approach transmitter problems differently than we would other equipment. Maybe it's because the transmitter is bigger than we are, physically. While we can't completely eliminate transmitter troubles, we can substantially reduce them, and as a fringe benefit, reduce the number of bromos consumed by the engineer.

Our patient, the transmitter, needs a number of things to remain healthy. First, a good physical fitness program, including a good diet, plenty of fresh air, and frequent check-ups. Second, someone to diagnose its minor ailments and prescribe remedies before the problems become serious, and third, a

well prepared trauma center to take care of emergencies. Since we as engineers don't usually have a fully staffed transmitter medical center to handle these functions, we have to be prepared to handle all of these elements ourselves.

Let's talk briefly about the first requirement—a good physical fitness program. Respiratory ailments can be avoided by making sure that the transmitter gets plenty of fresh air. While a jog around the antenna farm each morning might seem appropriate, a more practical solution is to make sure that air flow through the transmitter is adequate. Make sure that cooling intakes are not restricted and that the exhaust air duct runs straight from the transmitter where possible. **Exhaust fans should be provided with an interlock so that failure will not be allowed to cause potentially disastrous heat buildup in the transmitter.** A manometer installed across the air filter will allow you to monitor the condition of the filter.

Check Now....

Avoid Problems Later

Next on our physical fitness program is a healthy diet. Feeding the transmitter nice clean AC will reduce gastro-intestinal problems, both for the transmitter and for the engineer. If you use three-phase power, insist that the power company provide you with closed delta or wye connections....**never** open delta! Each leg on any power feed should be fitted with surge protectors. Lightning is definitely toxic to your transmitter's body.

Your regular transmitter check-ups will help you spot problems before they become serious. Keep accurate records on all of the transmitter's vital signs, including a frequent calculation of efficiency. A good barometer of tube aging is the amount of drive necessary to maintain output. Monitor final filament

voltage and maintain slightly below manufacturer's ratings for as long as possible to extend the life of the tube.

Make your proof of performance work for you. The performance of a properly maintained transmitter will **not** deteriorate from one year to the next. Any drop in performance should be investigated, even if the numbers still meet FCC specs.

Monitors are as susceptible to failure as any other piece of electronic equipment. Since we depend on them to know what our transmitter is doing, they should be returned to the factory every couple of years for recalibration.

There are some areas where over-maintaining does more harm than good. Tube rotation, for instance, probably does more to reduce socket life than it does to increase tube life.

Troubleshooting The Transmitter

Our second area of concern, the area we'll devote the most attention to here, is troubleshooting. Before we can put the transmitter "under the knife", we certainly have to know where to make the incision. Fortunately, exploratory surgery is usually not too painful, and the fatality rate is next to nothing. Developing a good, logical approach to solving transmitter problems will save many hours of lost air time.

Approach each problem with the attitude that the transmitter was healthy once before and it'll be healthy again. You can be almost certain that the problem is a faulty component. Don't pick a time when the transmitter is down to design a new version of the circuit that's causing trouble. Get it working the way it was designed to work first. Remember, if it worked once, it'll work again.

The first problem is to define the

HIGH GRID CURRENT:
NO BIAS
EXCESSIVE RF DRIVE
LOW PLATE CURRENT
HIGH PLATE CURRENT:
LOSS OF BIAS OR DRIVE
PLATE CIRCUIT DETUNED
TUBE SOFT
INCREASED SCREEN VOLTAGE
LOW GRID CURRENT:
LOW DRIVE
LOW FILAMENT EMISSION
INCREASED PLATE CURRENT
LOW PLATE CURRENT:
LOW EMISSION
LOW SCREEN VOLTAGE
EXCESSIVE BIAS

Figure 1 Typical symptoms and possible causes.

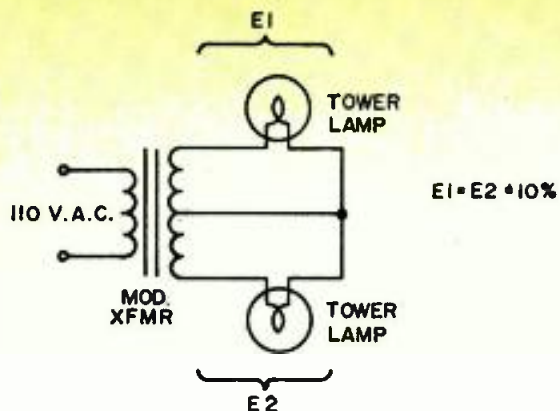


Fig. 2 A method of checking a modulation transformer for shorted turns.

About the Author

This article is based on a paper presented last month at an engineering session during the NAB annual convention in Chicago. BE wishes to thank the NAB and Peter Burk for their interest in serving the needs of small market radio.

BE extends an invitation to all size stations to submit material that will help further the professionalism of the broadcast industry.

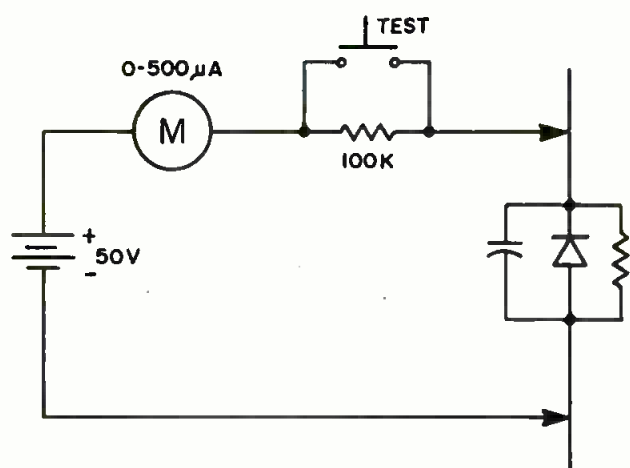


Fig. 3 Circuit for checking high voltage diode stacks.

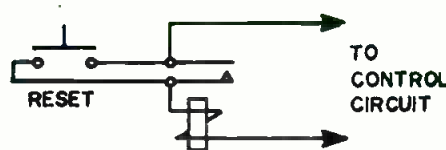


Fig. 4 Latching relay for troubleshooting intermittents.

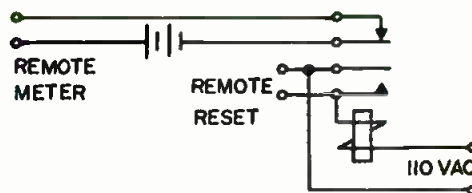


Fig. 5 Power failure detector for remote transmitter sites.

problem. How often have you gone digging into the box not knowing what you were really looking for? The meters on the transmitter were put there for just that purpose. They give you a chance to diagnose the problem before you open the doors on the transmitter. In order to effectively use these tools, you'll have to know what the normal indications are. If you haven't already done so, make a card that you can post right by the transmitter that has all of the parameters listed. Then you can instantly spot anything unusual. In fact, logging the lower stage parameters daily is not a bad idea. This will let you spot trends that indicate an impending disaster.

When you do spot something unusual, apply a little basic theory to determine the probable cause (Fig.

1). For example, a change in grid drive indicates a problem in a lower stage or possibly a bias problem in the indicated stage. If the drive to the buffer or driver falls off slowly over a period of time, better think about tube replacement. Of course, lack of drive doesn't always mean low emission. The interstage tuning should be checked.

If the tuning capacitor doesn't seem to have much effect, you might have a few turns shorted in the coil. One thing to be cautious of here; most tuning capacitors will rotate continuously. If something in the coupling network is off resonance, you may see a fairly normal peak in drive to the next stage at the point where the capacitor is at minimum or maximum capacitance, even though you're far from resonance. To eliminate this false indica-

tion, put a mark on the front panel that coincides with the point where the capacitor is fully meshed. If apparent resonance is achieved at this point, or 180 degrees from it, suspect a problem in the coupling network.

An increase in oscillator plate current indicates that possibly the stage is not oscillating. A simple tool for making a quick check here is a transistor radio. You should be able to follow the signal from the oscillator, through the buffer, and into the driver.

If the transmitter won't stay on, it's a little harder to make the meters tell you anything. You still don't have to shoot randomly into the dark, however. Use a logical approach to isolate the stage that's causing the breaker to trip. Usually the first step is to remove the load

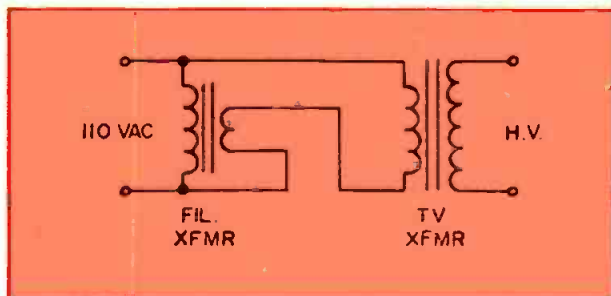


Fig. 6 Buck/boost transformer for adjusting voltage. Polarity of transformer determines increase or decrease.

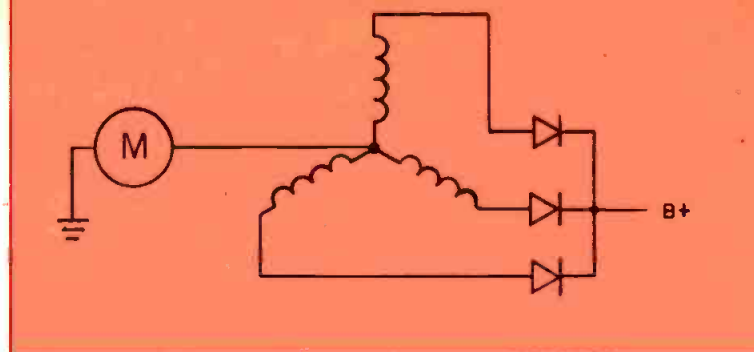


Fig. 7 Emergency 3-phase half-wave rectifier. Voltage will be approximately 50% of normal.

from the supply. Exercise care so you won't create further problems, though. Running a tetrode or pentode with screen voltage and no plate voltage is a good way to destroy the tube. Once you've confirmed that the supply itself is okay, disconnect each segment of the load until the breaker will stay in. Then you can make DC checks to guide you to the trouble.

A Plan Of Attack

Unfortunately, not all component failures are as simple as dead shorts or complete open circuits. As an example, modulation transformers will occasionally develop a short across just a few turns. Here's a simple way to check the transformer using parts that you have on hand at the transmitter. Connect a

tower lamp across each side of the primary to provide a load and connect 110 volt AC to the secondary. Measure the voltage across each lamp; they should be within ten percent of each other (Fig. 2).

If you have narrowed your problem down to a power supply, use the same logical approach to find the defective component. Break the supply into three parts: transformer, rectifier, and filter. Divide the faulty area into still smaller units until you find the defective component.


Don't allow yourself to rationalize that a component is probably okay just because it's located in a spot that's hard to reach. This sounds very basic, but for some reason, when we're under pressure, we frequently throw basic logic out the

window and end up taking three times as long to find the problem, trying to take shortcuts. I cannot over-emphasize the time tested, sure-fire approach of dividing the circuit into progressively smaller units until the defective component surrenders.

Rectifying The Problem

If your transmitter uses encapsulated diode stacks, remember that you can't check them for opens with an ohmmeter. More often than not, however, a stack will short and that you can readily check with the ohmmeter.

If you want to keep a better watch on the condition of encapsulated rectifiers, measure the voltage drop across a brand new stack.

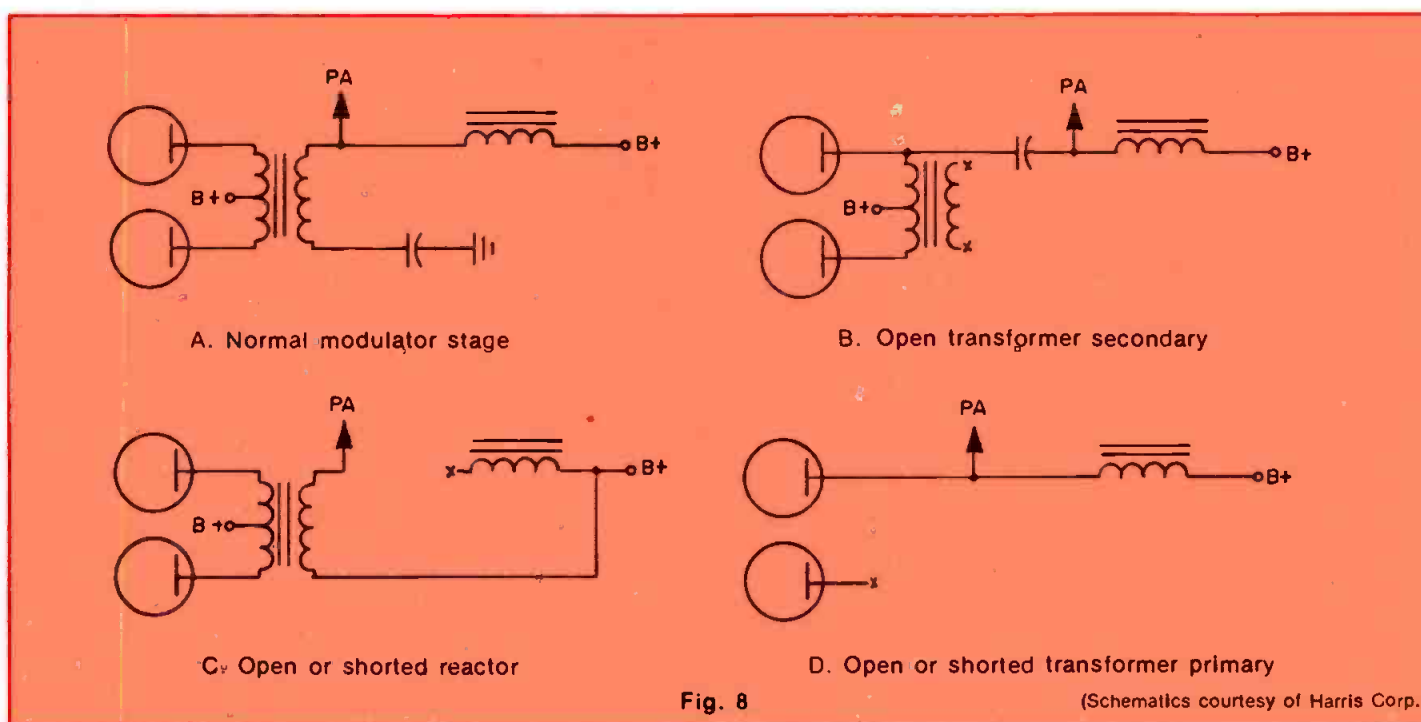

Then you can go back any time and read the drop across the ones in the transmitter. If the drop is lower, one or more of the diodes in the stack has shorted.

If your transmitter uses high voltage stacks made up of many individual diodes, it's not a bad idea to check them once in a while. Sometimes a few diodes in the stack will short, leaving the stack operational, but subject to premature failure. Figure 3 shows a simple circuit that can be used to check each diode without taking the stack apart. If the cell under test is shorted (or connected with reverse polarity) the meter will read full scale. When the switch is pressed, a good cell will read about 100 microamps. Anything above this indicates a degraded cell. With the connections reversed, anything under full scale indicates poor forward conduction or an open cell. If you don't have a spare stack on hand, a small investment in a handful of diodes would be a good idea. Don't forget to keep some appropriate value bypass caps and equalizing resistors on hand, too. If you find yourself rebuilding a stack in the middle of the night, having fresh components with nice, long leads will speed the task along considerably.

One solution for mercury vapor rectifier problems is to replace them with solid state units. In addition to improved life and freedom from arcbucks, you have eliminated the rectifier filament transformer—just another source of "ooze" in an older transmitter. If you're still using mercury vapors, have a spare set all cooked in and stored vertically, ready to install. That initial 30 minute ionization period seems like hours if the transmitter is off the air.

For some reason, most engineers treat meters as if they were sacred cows. They are just another component in a transmitter and subject to the same failures as any other component. Let's look at several ways we can confirm that those wagging needles are telling the truth.


Most transmitters have sample voltages brought out for use with remote control systems. The sample is generally taken from the same point as the local meter, but scaled down to something under five volts. If you measure the voltage at this point with a good VOM, you can compute the ratio between the VOM and the local transmitter meter. If you later suspect the plate voltmeter, just check the remote sample point with the same VOM

and you'll know for sure.

You can check an RF ammeter by putting another meter in series with it. If the readings aren't within four percent of each other, at least one of them is in error.

Next Month

Next month we'll continue this discussion with deeper search into the circuitry and how to put a hex on Murphy's Law.

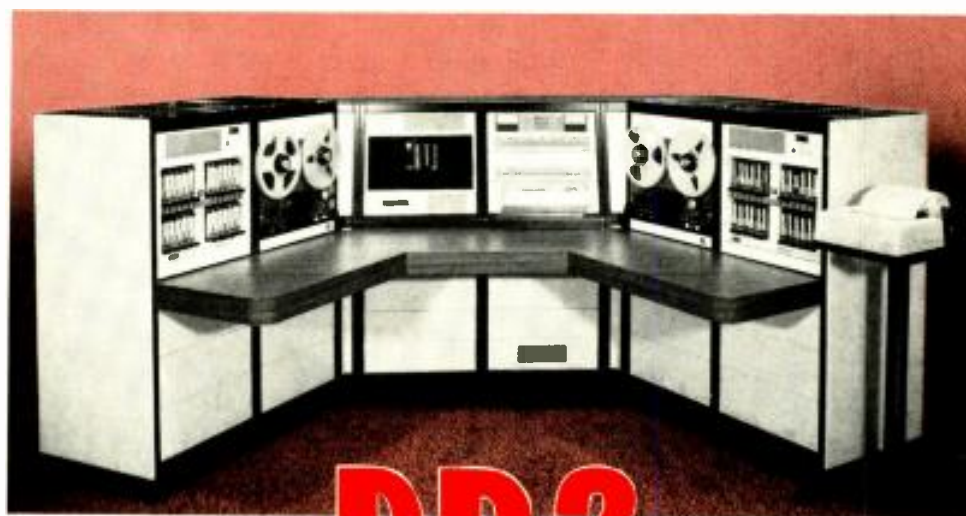

DP-2

all new automation system from

It's here! The all-new DP-2. Microprocessor controlled, it offers more custom features than any other unit available today... features such as 8,000 event capacity; built-in external function control; automatic record of network; automatic transmitter logging option; mag tape, paper tape and solid state storage facilities; interfacing to business computers; sub-routines in any size; video readouts and programming; and up to forty audio channels.

The DP-2 is available in low-boy console with desk as shown or in standard racks. It's versatile and inexpensive... and it's from the people who invented computer assisted broadcasting—SMC. It's loaded with features that will "hype" your station's air sound and profits.

Get all the facts on the new DP-2 system for yourself. Return the attached coupon today for more information.



Systems Marketing Corporation
1005 W. Washington Street
Bloomington, Illinois 61701
309-829-6373

*Broadcast Automation—
our only business*

YES I want to know more about DP-2. Send complete information and have your Representative call me.

Name

Station

Address


Zip Phone (area code)

75-105

For More Details Circle (29) on Reply Card

Is U.S. Television Technically Inferior?

By Ron Whittaker

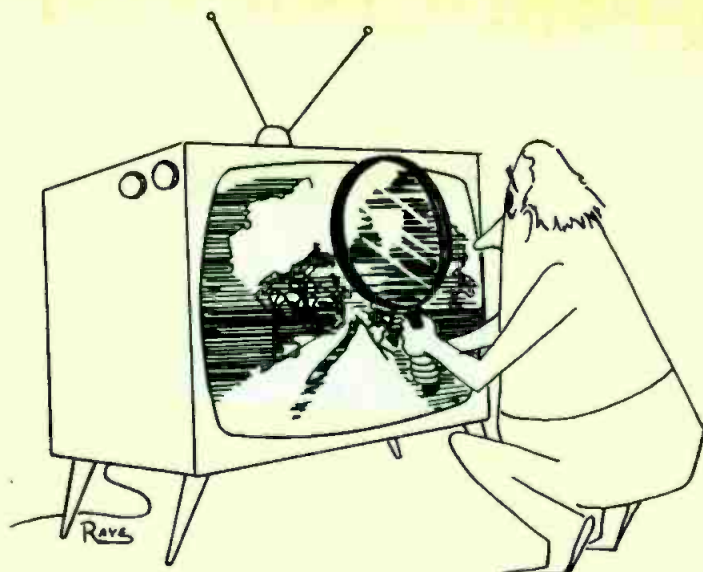

What do you mean 525 lines?
I can only count 480!

It is not uncommon for someone to return to the U.S. from a trip abroad and remark, "Their television pictures seemed sharper and clearer than ours, and their sound seemed better than what I'm used to over here."

The question of whether the U.S. is "stuck" with an inferior technical system of television by today's world standards is a legitimate one, since it is well known that historically we got into the television business rather early. In fact, it was in 1941 that the National Television System Committee (NTSC) recommended the standards for U.S. television to the FCC. This was only two years after U.S. television was publically "unveiled" at the World's Fair. Since that time, there have been some very significant breakthroughs in TV technology—breakthroughs that have subsequently been available for incorporation in TV systems adopted by other countries.

From the standpoint of the number of countries in the world using the various TV systems, the U.S.-NTSC system could actually be considered a "minority system." The majority of countries are on some type of 625 line system.

World Television Systems

Although there are actually 14 separate technical approaches to broadcast television used in the world, just a few systems serve the vast majority of countries. The basic differences in the systems lie in the number of lines, the channel

width (RF bandwidth), the type of modulation used for audio and video and the approach to handling color information.

The number of lines ranges from 405 used in the United Kingdom for their black and white broadcasts, to 819 lines used by one TV service in France. The channel width ranges from 5 to 14 MHz. Audio is FM in most systems. (AM television audio is generally associated with national systems that are being phased out, but France is a major exception here.) Both positive and negative modulation of video are used, but like the U.S., most national systems use negative modulation. Three approaches to handling color information are used—the U.S.-NTSC, the German Phase Alternate Line (PAL) system and the French Séquentiel Couleur À Mémoire (SECAM) system.

The U.S. system of 525 lines, 30 frames per second (60 fields) is shared by Canada, Mexico, Latin America, Japan, Peru, Panama, the Philippines, Puerto Rico and South America.

Most of the rest of the world is on the 625 line, 25 frame system. Whereas the U.S. system uses a combined audio and video bandwidth of 6 MHz, the 625 system uses both a 7 and 8 MHz bandwidth, depending upon the country. France's 819 line system, with a bandwidth of 14 MHz, is capable of very high resolution, but its incompatibility with the rest of Europe has presented such a problem that it is being replaced by the 625 line

European standard. (Both of France's systems use amplitude modulated sound.)

The Communist countries almost all use the 625 line system with a 8 MHz bandwidth. The 405 line system used in the United Kingdom for black and white broadcasting, is phasing itself out with the growth of color there, which is broadcast by the 625 line, 8 MHz system. Although it might be nice to assume that a country's TV standards were based purely on technical needs and quality considerations, in actual fact, political considerations have been a major factor with many countries.

Two basic systems have emerged as major world systems—the 525 line, 60 field system of NTSC, and the 625 line, 50 field system using one of the PAL approaches to color. These are the two systems most often compared.

525 Lines Vs. 625 Lines

Against one of the newer 625 line systems, it would appear that the United States is coming off "second best" in TV picture quality because of the fewer scanning lines and the narrower bandwidth (6 MHz vs. 8 MHz). Studies, in fact, indicate that, under many conditions, the 625 line approach, in general, produces pictures with more apparent detail. However, comparisons are extremely difficult because of a profusion of complicating factors all along the line. Studies on TV picture sharpness comparisons go back over ten years, and the proce-

Old-New Reel Time Recorder

Telex/Magnecord series 1400 broadcast quality recorder/reproducer. An old name that spells reliability. A new design for today's state of the art.

- The Old. Telex/Magnecord products are still made in the USA so parts and service are always available. The series 1400 is still built on a solid die cast aluminum main frame for reliable operation around the clock. It's still available in full, half and

quarter track configurations, has fail safe differential brakes and accepts 8 1/4 inch reels. It also still comes with three motors—but then, that's touching on the new.

- The New. A brushless d.c. servo drive with a crystal oscillator control reference so accurate it virtually eliminates program timing errors. New, three speeds: 3 3/4 - 7 1/2 - 15 ips. New catenary head block for straight tape loading, the convenience of one hand cueing and the bi-level illumination of push button controls. New DTL logic controls eliminate EMI and provide fast, spill

proof tape handling gentle enough for half mil tape. And new electronics, clean to 60 dB S/N at all speeds.

- If you're looking for a real time, reel recorder with old name reliability but designed for today's demands, you'll find it in the Telex/Magnecord series 1400. For complete information please write:



PRODUCTS OF SOUND RESEARCH
TELEX
COMMUNICATIONS, INC.

9600 ALDRICH AVE. SO. • MINNEAPOLIS, MINN. 55420 U.S.A.
Europe: 22, rue de la Legion-d'Honneur, 93200 St. Denis, France
Canada: Telak Electronics, Ltd., Scarborough, Ontario

dures which have been developed for controlling variables and trying to objectively evaluate an essentially subjective thing like picture sharpness have become incredibly complex. (Are you most affected by vertical resolution or horizontal resolution? What is the relative amount of image blur of the 25 frame and the 30 frame systems when it comes to a moving subject? What about color sharpness versus luminance sharpness? What about the system's ability to handle contrast and a thing called "modula-

tion transfer function?" What viewing distance are you considering?... etc., etc.)

"Copping out" of a discussion of all these (important) issues and dropping down somewhere near the "bottom line," it can be stated that repeated subjective comparisons of the two systems rather consistently point to a slight superiority in the 625 line system for reproducing image details.

It must be kept in mind at the same time, however, that a "price"

is paid for this slight but significant increase in picture resolution. The extra one or two megahertz of RF bandwidth means that fewer stations could be accommodated in an existing television spectrum space. For countries with a limited number of TV stations on the air, this is not a problem, but with countries such as the U.S. or Japan this compromise of bandwidth for stations would be significant. Also, as the number of lines goes up, the complexity of the associated electronics increases.

All things being equal, a 625 line TV system will be able to resolve (horizontal resolution) about 100 more lines than a 525 line system. As will be explained later, a great many things get in the way of consistently experiencing this greater resolution capability, however—at least from the standpoint of a home viewer.

But, for a moment, continuing the 525-625 comparison, it might be helpful to refer to a study in Raymond Wilmotte's analysis in "Technological Boundaries of Television," distributed by the National Technical Information Service of the U.S. Department of Commerce. In a simulated comparison of a 525 and 625 line system at a distance of about three feet from a 20 inch wide TV monitor, subjects rated a 525 line picture as "poor" in sharpness and a 625 line picture as "fair." As viewing distance increased, however, the difference in relative perceived sharpness was reduced. At a distance of about 6 feet both systems were judged as "good," although the 625 line system was still recognized as being superior. At 12 feet the difference between the two systems was perceived as being even less significant, but subjects still gave the image sharpness of the 625 line system a slightly better rating.

Practical Quality Comparisons

Comparisons which take place under conditions that are more "laboratory" than "home" leave out some very basic intervening variables. Once you trace what happens to TV picture quality on a set owned by "Mr. Average American," some really depressing things become apparent. And here is where the quality of the U.S.

(Continued on page 57)

You Have a Right To Expect More from Scully's Family of Recorders.



And look what you get with Scully's 280B/284B series. One to four tracks. Plus these important features:

- Optional DC capstan servo
- Motion direction sensing logic
- Innovative low-noise electronics
- Functionally illuminated controls
- Optional 14" reel capability
- Reproduce-only version (285B)
- Variable speed accessory with L.E.D. speed read-out

For multi-channel application, Scully has the 284B-8, one inch 8-track master recorder with DC servo and 14" reels. You'll solve a lot of recording problems at once with the versatile Scully family.

Sales, service and replacement parts are available from over 200 world-wide distributors.

Get the facts. Write, Telex or phone:

► **Scully | Metrotech**

Division of Dictaphone

475 Ellis Street
Mountain View, California 94043
(415) 968-8389 TLX 34-5524

Scully and Metrotech are trademarks of Dictaphone Corporation, Rye, New York

For More Details Circle (64) on Reply Card

U.S. Color

(Continued from page 52)

system until rather recently really took a back seat.

The weakest link in the whole TV quality chain is the home receiver. For starters, many consumer sets do not even take advantage of the full video bandwidth resolution broadcast by U.S. television stations. The reason mostly comes down to cost-cutting considerations.

The same, of course, can be said of the quality of audio associated with a typical home receiver. Although the FM audio signal may meet FCC standards and be "flat" from 50 to 15,000 Hz when it is broadcast, by the time it is filtered through a low-grade TV audio section and a four-inch speaker, the resulting quality leaves a great deal to be desired.


Unfortunately, it seems that most TV set owners are only concerned about TV audio when it is not there! And, understandably, manufacturers are not willing to put themselves at a price disadvantage by upgrading audio sections if the typical buyer cannot recognize or appreciate the difference, or—and here is another aspect of the problem—if a great percent of the programming contains a rather restricted audio quality to start with (due to old optical film tracks, poor network relay quality, etc.)

Since audio fidelity is generally not stressed in U.S. television productions, hooking your hi-fi system up to an early (relatively pure) section of your set's audio system may provide you with audio information that you may subsequently decide is better off being "lost" in a poor audio system. (Why is it that combination hi-fi and TV systems typically don't route the TV sound through the full-range amplifier and speakers?)

NTSC Vs. PAL

As originally proposed, the PAL system of color was seen as an improvement in the NTSC system, and not as a completely new approach. The basic idea is to correct for hue error in TV pictures (resulting from phase distortion) by a phase error compensation method of switching alternate scanning lines through a shift of 180 degrees. In effect, a NTSC color signal is

(Continued on page 59)

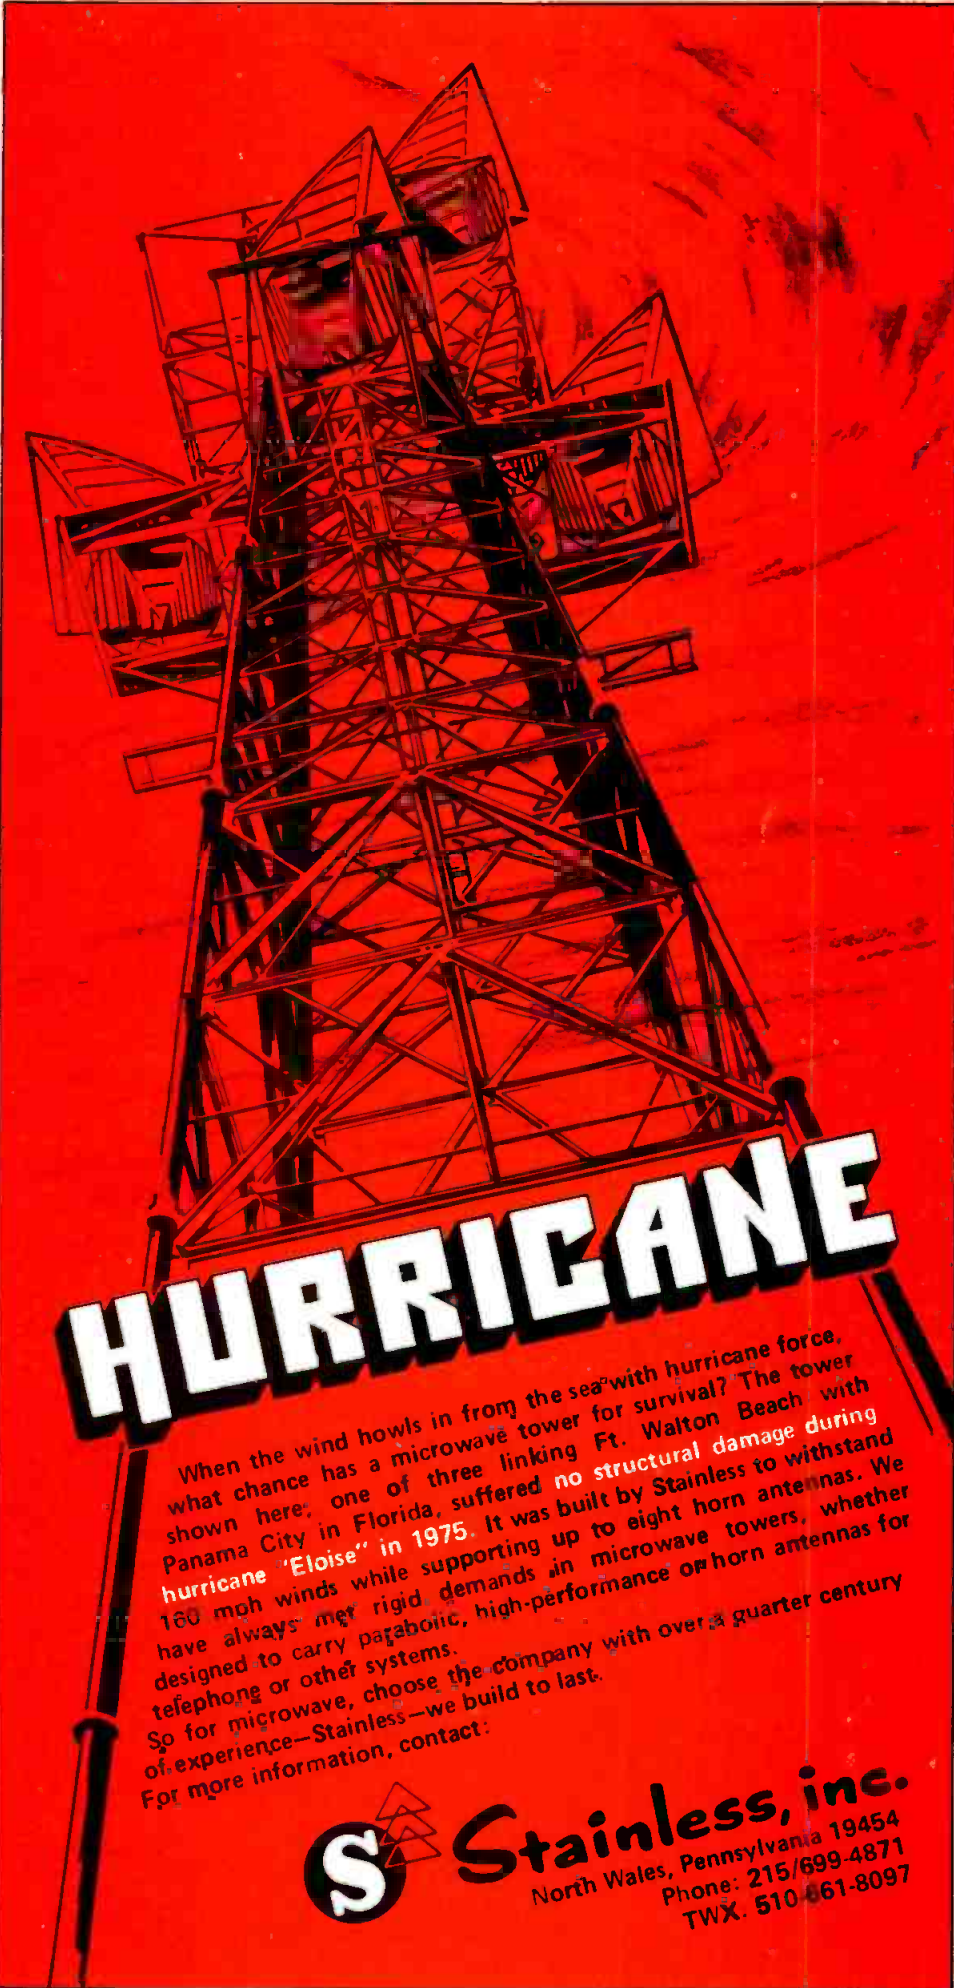

HURRICANE

When the wind howls in from the sea with hurricane force, what chance has a microwave tower for survival? The tower shown here, one of three linking Ft. Walton Beach with Panama City in Florida, suffered no structural damage during hurricane "Eloise" in 1975. It was built by Stainless to withstand 160 mph winds while supporting up to eight horn antennas. We have always met rigid demands in microwave towers, whether designed to carry parabolic, high-performance or horn antennas for telephone or other systems. So for microwave, choose the company with over a quarter century of experience—Stainless—we build to last.

For more information, contact:

S Stainless, inc.
North Wales, Pennsylvania 19454
Phone: 215/699-4871
TWX: 510-661-8097

THE WILKINSON AM2500B 2.5 KW AM BROADCAST TRANSMITTER

FEATURES

- Solid State Modulator Driver
- Solid State Exciter
- Only One Tube Type - (4) 4-1000A
- Variable Vacuum Capacitor Tuning
- Motorized Variable Capacitor Loading
- Low Distortion, High Level Modulation
- Accessible Drawer Construction
- Solid State Timing Circuits
- Self-Testing Silicon Power Supplies
- Automatic Recycle
- Simplified PA Tuning - Only two controls
- Double Duty Plate & Modulation Transformers
- Pretuned at Customer's Frequency
- Power Cutback (optional)
- Designed for Remote Control
- Ample, Roomy Cabinet for Ease of Service
- Completely Metered
- Uses Standard Parts with Original Maker Numbers



WILKINSON
ELECTRONICS, INC.

701 CHESTNUT ST. TRAINER, PA. 19013
TELEPHONE (215) 497-5100

PEOPLE IN THE NEWS

The National Association of Broadcasters has announced the election of 18 prominent broadcasters from throughout the nation as members of its Board of Directors.

Elected to the Radio Board were:

District 2—(New Jersey and New York) William O'Shaughnessy, president, WVOX AM-FM, New Rochelle, N.Y.

District 4—(North Carolina, South Carolina and Virginia) Carl V. Venters, Jr., president and general manager, WPTF/WQDR, Raleigh, N.C.

District 6—(Arkansas, Louisiana, Mississippi and Tennessee). Len Hensel, vice president and general manager, WSM AM-FM, Nashville, Tenn.

District 8—(Indiana and Michigan). John R. Anderson, president and general manager, WCCW AM-FM, Traverse City, Mich.

District 10—(Iowa, Missouri and Nebraska). R. M. McKune, president and general manager, KTTR/KZNN, Rolla, Mo.

District 12—(Kansas and Oklahoma). Pat Murphy, vice president and general manager, KCRC AM-FM, Enid, Okla.

District 14—(Colorado, Idaho, Montana, New Mexico, Utah and Wyoming). Wayne Cornils, president and general manager, KFXD AM-FM, Nampa, Ida.

District 16—(Arizona and Southern California). Jack Willis, vice president and general manager, KHEP AM-FM, Phoenix, Ariz.

Class "A" (markets of 500,000 population or more). David G. Scribner, president, Doubleday Broadcasting, KHOW AM-FM, Denver, Colo.

Class "B" (markets with populations between 100,000 and 500,000). Herbert W. Hobler, president, WHWH/WPST, Princeton-Trenton, N.J.

Class "C" (markets with populations between 15,000 and 100,000). Dick Painter, general manager, KYSM AM-FM, Mankato, Minn.

Class "D" (markets with populations below 15,000). Jack S. Younts, president and general manager, WEEB, Southern Pines, N.C.

(Thirteen Radio Board directors—nine from odd-numbered districts and four at-large—have another year to serve. The remaining five directors are appointed to represent national radio networks.)

Results of the Radio Board election were certified by a three-member committee made up of Gordon Peil, WKYS(FM), Washington, D.C., chairman, and Bruce Houston, WEAM, Falls Church, Va., and Charles Macatee, WMAL, Washington.

Business-Industry

Since last month's column, we've received word of more changes within the broadcasting community. ...For instance, at Television Research International,

(Continued on page 60)

U.S. Color

(Continued from page 57)

transmitted in one line and a "mirror image" of the signal in the next line. The eye then averages the two lines and perceives the separate lines as combined (averaged) color information. Unwanted phase shifts caused by VTR problems, multipath reception or whatever then affect the two opposite signals so that the errors cancel each other. The net effect is a picture with extreme chroma stability. The process requires high speed electronic switching circuitry, which increases the cost of receivers about four percent.

This super-simplified explanation does not really do justice to the basic PAL process. And there are actually three forms of PAL currently in use. Some of the newer versions have a color signal that is totally stable and durable under extremely adverse reproduction and transmission conditions.


But even the Germans who developed PAL have a great respect for the NTSC idea. Walter Bruch of

Telefunken was quoted as saying that the NTSC solution to televising color "certainly belongs to the outstanding physical and technical masterpieces of the century."

However, until recent developments resulted in the addition of

added circuits to U.S. receivers to help stabilize color balance, the NTSC color system was rather fragile and unstable. PAL and SECAM were both considered to represent superior broadcast techniques.

(Continued on page 63)

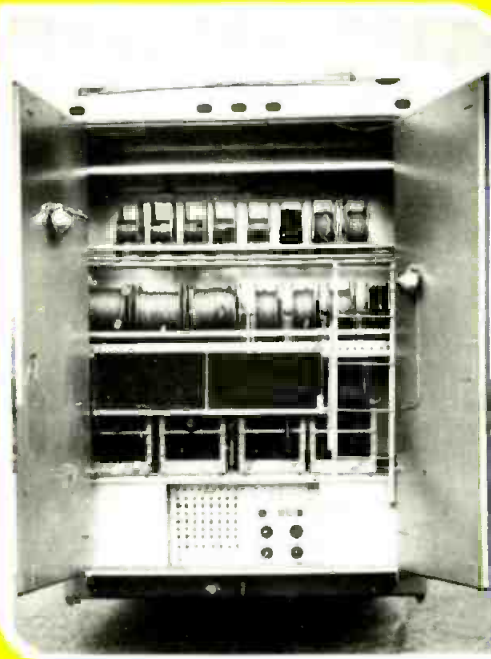

WRAP IT TO GO

Microphone cable, coaxial cable, power cable. Wrap 'em on Hannay reels to go wherever your mobile equipment must go. Hannay reels make cable handling faster, easier and safer to help you set up sooner and stow the cable quickly when the show is over. Choose the reels you need from a wide range of standard and custom models. Send for complete information on Hannay Reels for broadcast cable.



HANNAY REELS

CLIFFORD B. HANNAY & SON, INC., WESTERLO, NEW YORK 12183

For More Details Circle (36) on Reply Card

On the Air®

with a full range of high reliability

TV TRANSLATORS


TV TRANSMITTERS

TV AMPLIFIERS

@j *acrodyne*
industries, inc.

21 Commerce Drive • Montgomeryville, Pa. 18936
(215) 368-2600 TWX 510-661-7265

For More Details Circle (50) on Reply Card

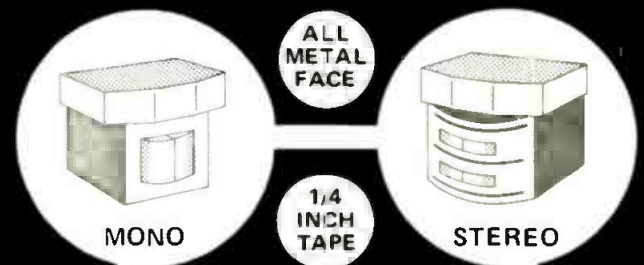

Scully

FLUTTER BAR
RECONDITIONING

AMPEX

NON POPPING GATE
SPRING MODIFICATION

Magnacord

FOR OLDER MODELS:
POLE PIECES
CAPS W/GUIDES
REPLACEMENT HEADS

DIRECT REPLACEMENT HEADS

MMI HEADS EQUAL OR EXCEED
ORIGINAL EQUIPMENT SPECS.

SEND US YOUR ASSEMBLY. We will ultrasonically clean everything — install new heads if yours cannot be relapped — replace any worn or missing minor hardware — adjust — test — ship back PRE-PAID your assembly (not some other).

36 HOUR SERVICE — LOANERS AVAILABLE

INSTALL YOURSELF. Buy MMI heads with complete written and pictorial instructions.

MINNEAPOLIS MI MAGNETICS, INC.
8125 PLEASANT AVE. SE. MINNEAPOLIS, MINN. 55420
(612) 884-7353

For More Details Circle (51) on Reply Card

OUT OF SYNC AGAIN!

Not with
VACC's model 100

Introducing: VACC's NEW Model 100 NTSC Color Sync Generator

You know that horrible feeling. . . when your master sync generator has drifted out of spec. . . or has just failed.

You'll never have to live thru that again if you have a VACC model 100 as a spare. NTSC stability is guaranteed to be 10 Hz of 3.579545 Mhz over a SIX MONTH DURATION. Unique MOS/LSI technology improves reliability by drastically reducing components. All outputs (H & V drive, composite blanking & sync, burst-flag, and subcarrier) are digitally controlled to eliminate drift from temperature and aging.

There's only one NTSC color sync generator that has that kind of long-term stability which retails for \$700; it's the new VACC model 100. Nothing else even comes close. There's more we can tell. Circle the bingo card and mail today, or call (303)-667-3301.

Video Aids Corporation of Colorado

Manufacturer's of:
Editor-programmers
Party-Lines
Gen-Lock Sync Gen's.
Cross-pulse Gen's.
Burst-Phase Meters
De-Mod & Monitor Kits



VIDEO AIDS corporation of colorado
112 West 4th Street, Loveland, Colorado 80537
phone (303) 667-3301

For More Details Circle (38) on Reply Card

People

(Continued from page 58)

Inc., **Harold C. Blakeslee** assumes his company's presidency....A background in radio and broadcasting has resulted in **Edward M. Corse** being appointed staff engineer at LPB Inc.

The newly formed Beaucraft Division of UMC Electronics has chosen **Charles E. Collett** as its manager of sales and marketing while **Cindy Guzzo** fills a similar position of marketing manager at Pacific Recorders and Engineering Corporation.

Bill Kneidler has recently received word of his appointment to general manager of Unimedia.... Several states away in Omaha, Nebraska, **McMartin Industries** has given the responsibility of central sales manager to **Tom S. Butler**.

An election at Conrac Corporation resulted in **Frederick S. Wonham** being chosen their board director....Videodetics of Anaheim, California, announces that **Ron Coleman** has joined the company as national marketing manager with special emphasis on Learning Resources Products....And in this same area, the new director of marketing at CCA Electronics is **A. W. (Bill) Trueman**.

The Federal Communications Commission has seen some changes in personnel recently as **Arthur Bernstone**, chief of the Rules and Standards Division, retired and **Alan R. McKie** assumed the job of deputy executive director.

INTRODUCING



**VERY
LOW COST**

TRANSIT CASES

ECONOMIC: These plastic cases are cheaper than wood crates when the cost is amortized. Prices start at \$30.49 ea.

INDESTRUCTIBLE: Made of high-density polyethylene giving very high impact resistance.

PROTECTIVE: Custom foam cushioning is available for your delicate equipment.

SUPER TOUGH: They withstand 100 trips by air and meet Air Transport Assn. Specification 300-CAT-1.

VARIETY: 56 standard sizes
THREE GRADES: 1) rain-tight 2) air-tight 3) military (vapor seal).

**THERMODYNE
INTERNATIONAL
LTD.**

12600 YUKON AVE
HAWTHORNE
CALIFORNIA 90250
(213) 679-0411



For More Details Circle (39) on Reply Card

BROADCAST ENGINEERING

NEW PRODUCTS

High Performance TBC

Consolidated Video Systems, Inc. has introduced the CVS 520 high performance digital time base corrector. The CVS 520 is designed to handle segmented (Quads, IVC 9000, etc.) and non-segmented (Helical, U-Matic, etc.) video signals principally for broadcast and other high level studio systems. The CVS 520 utilizes a 9 bit, 4 times subcarrier, PCM digital sampling technique.

Specifications include: Signal-to-noise greater than 60 dB; Differential phase less than 2°; Differential gain less than 2%.

The CVS 520 standard features include: Line by line velocity correction in all color modes; Automatic direct/heterodyne color switching; Video level meter; Built-in drop-out compensator; Built-in adjustable proc amp; Front panel primary and secondary controls; and the active video portion of the last 8 lines of vertical blanking may be individually selected to pass vit, vir, and other test signals.

For More Details Circle (82) on Reply Card

Framestore Synchronizer

A new Digital Framestore Synchronizer (DFS-3000) has just been announced by MCI (Micro Consultants, Inc.), national distributor of the product. Manufactured by Quantel, Ltd. of Caterham, England, the DFS-3000 is capable of storing 2 complete fields of video. The unit is capable of synchronizing any video source including VTR inputs. The source may be local or remote, fed by line or satellite.

For More Details Circle (65) on Reply Card

Digital Clocks/Timers

Pacific Recorders and Engineering announces the new Digitimer II family of clocks. Two standard master clocks, the DT-2M (reads in minutes and seconds) and the DT-2T (reads in minutes, seconds and tenths) have four pushbuttons on the front panel that control

(Continued on page 62)


Get 27 Handles on Your EQ Problems

27 precise vertical equalizer controls on the Model 527-A front panel show graphically the 40 Hz to 16 kHz equalization you introduce to create the sound you want. Each of the 527-A's precision equalizers is centered on a standard ISO 1/3 octave frequency, providing the engineer/producer with a creative tool which gives him total command of the entire audio spectrum for contouring or correction. The versatile 527-A also doubles as a "room equalizer" for correcting deficiencies in monitor or sound system response, using the controls as attenuators for system peaks.

Whether your interest is live performance amplification, live recording, re-recording, mastering, or broadcast production, the 527-A is an indispensable creative tool.

So, get a handle on your EQ problems. Get a 527-A from your UREI dealer.


UREI
QUALITY
OF COURSE

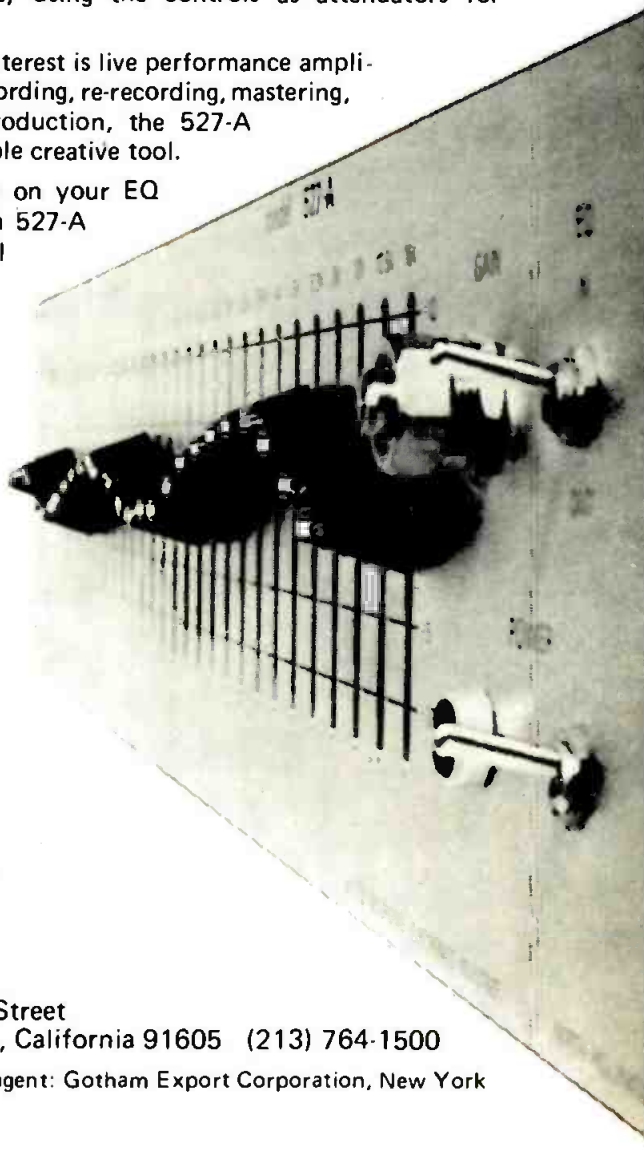

11922 Valerio Street
No. Hollywood, California 91605 (213) 764-1500
Exclusive export agent: Gotham Export Corporation, New York

For More Details Circle (40) on Reply Card

remote pickup broadcast systems

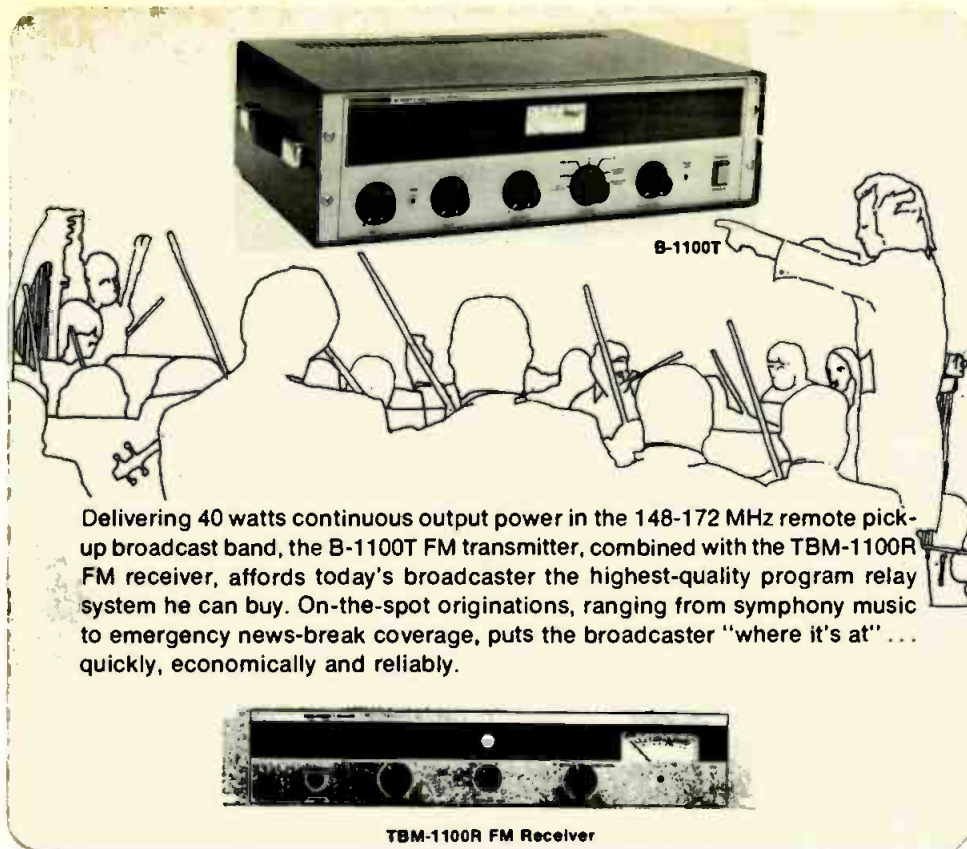

Delivering 40 watts continuous output power in the 148-172 MHz remote pickup broadcast band, the B-1100T FM transmitter, combined with the TBM-1100R FM receiver, affords today's broadcaster the highest-quality program relay system he can buy. On-the-spot originations, ranging from symphony music to emergency news-break coverage, puts the broadcaster "where it's at" ... quickly, economically and reliably.




TBM-1100R FM Receiver

McMartin

4500 South 76th Street • Omaha, Nebraska 68127 • (402) 331-2000 • telex 048-485

For More Details Circle (41) on Reply Card

MODEL 7200 chroma keyer

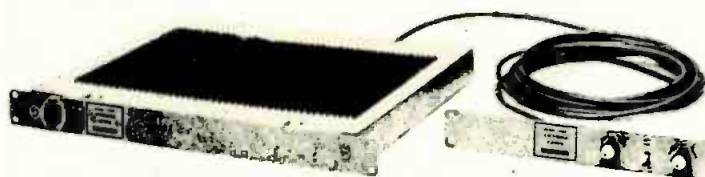

- Produces chroma-keyed output from two encoded video inputs
- Comb Filter
- Zero chroma delay
- Sync adding capability for non-composite inputs
- Remote control panel includes vertical-interval key on/off switch

DYNASCIENCES

video products

Township Line Road, Blue Bell, PA. 19422
Tel.: (215) 643-0250 / Telex: 84-6358

A SUBSIDIARY OF **Whittaker**

For More Details Circle (42) on Reply Card

timing functions.

Both master clocks have complete remote control capability and up to ten master clocks can be paralld. Each clock can drive as many as ten DT-2S slave units (DT-2S reads minutes and seconds) placed up to fifty feet away.

The unique member of the Digitimer family is the DT-2C. A digital timer with a clock face. The DT-2C reads in minutes and seconds, digitally, in the center of a simulated clock face. Replacing the sweep hand on the clock face are 60 illuminated LED's. As the seconds tick off, so do the LED's allowing the viewer to see how many seconds have elapsed. This illuminated sweep second hand provides a unique, yet functional way to give talent a visual idea of time. The DT-2C can be used as a single timer, or can be used as a slave from either the DT-2T or DT-2M.

For More Details Circle (66) on Reply Card

Edit Decision Lister

Time Tech Corp. announces the low-cost answer to the problem of



**NOTHING TO
BURN OUT!**

**SOLID STATE
RECTIFIER TUBES**

Replace vacuum and gas rectifiers with filamentless, dependable EDI SOLID-TUBE® silicon solid-state rectifiers for all these advantages: No filament or transformer. Greater reliability. Constant output. Long life. No warm up. No heat. Proved in use. Meets or exceeds tube ratings. Lower cost. Full range of replacements.

Write for a complete list of equivalent tube types, general information, and costs. Application advice also available.

edi **SEND TODAY**
electronic
devices inc.

21 GRAY OAKS AVE., YONKERS, N.Y. 10710
(914) 965-4400. TWX 710 560-0021

For More Details Circle (80) on Reply Card

BROADCAST ENGINEERING

U.S. Color

(Continued from page 59)

ques, even though they resulted in some loss of vertical resolution. The latest NTSC receiver technology now makes possible color stability which definitely rivals the best of the PAL systems.

Quality and the U.S. Consumer

The television system in the United States is highly responsive to the preferences of consumers, probably more so than in any other country. As a greater awareness develops for uncompromising audio and video quality in television, the industry will undoubtedly respond. But a television viewer who is not motivated (or does not know enough) to adjust the contrast or color balance on his set to bring into the general ballpark of NTSC intentions, is not going to lead a campaign to upgrade technical quality. (How many homes of non-broadcast friends have you visited where you were just itching to get up and fix a badly adjusted TV set?) For many people, television is still some sort of an enigma.

The writer has an aunt (with a master's degree) who has lived in a particular area for several years and only recently found out the "U" on her VHF dial can be used to get three UHF stations in her area. She had just always assumed that these stations weren't available for some reason. She even had been watching several VHF stations in monochrome because she did not understand the mysteries of the fine tuning knob. For such people the new automatic frequency and chroma circuitry will make all the difference in the world (once they buy new sets).

U.S. broadcasting, being in a competitive commercial environment.
(Continued on page 67)

Products

(Continued from page 62)

having to hand-write all of the pertinent information for each edit decision during a pre-edit preview session. The editor can concentrate on the material and not be distracted by manually writing SMPTE time, type of edit (Audio/Video), Reel Number of the source material and whether the edit point is a Start or Stop.

The Model 9510 Edit Decision Lister records all of this information automatically when an edit point is selected "on the fly" and neatly formats the list on a standard ASR-33 teletype. A tape recorder remote keyboard on the control panel of the unit allows control of the previewed material

For More Details Circle (69) on Reply Card

Limiter, Bridging Amplifiers

ITI Electronics, Inc. is now making available to broadcasters, two amplifiers which are useful in

the control and monitoring of audio signals. These amplifiers have gained a good reputation for reliability and performance in the telephone industry, and are part of a complete line of amplifiers used to fill a variety of functions in telephony.

The ITI-TLC 222 Limiter Amplifier provides control of level. It employs an LED/photo-diode feedback which assures fast attack and low distortion in its leveling action. The TLC 222's integrated circuit gain stage has been chosen for its

(Continued on page 65)

DIGITAL BROADCASTING

...the future is **now!** and
CHYRON leads the way in
TV-AM-FM SYSTEMS...

- CHYRON II HIGH RESOLUTION GRAPHIC GENERATOR
- CHYRON IIIA TITLING SYSTEMS
- DIGITAL STILL FRAME STORAGE UNITS
- DIGITAL AUDIO SPOT STORAGE UNITS
- DYNAMIC MONTAGE GRAPHIC SYSTEMS
- EBU/SMPTE SUBTITLING SYSTEMS


For complete information write:

CHYRON

TELESYSTEMS DIVISION OF CHYRON CORPORATION

223 Newtown Road, Plainview, New York 11803 • (516) 249-3296

Audio Distribution...

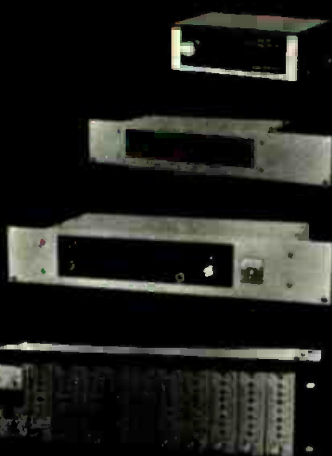

...made easy!

Six different audio DA's designed to solve all of your distribution problems.

From our table top 1 in/6 out to our powerful 20 in/80 out. Stereo or mono operation, output metering, individual level controls and balanced inputs and outputs are just a few of the many features found in these superb DA's. Performance? Response — 10 Hz - 20 KHz ± 0.5 db; Dist. — 0.1%; Output level — +20 dbm max; Signal/Noise — -90 db; Channel separation — 80 db. Quality? All RAMKO products are backed by our 10 day free trial and 2 year warranty. They have to be good to do that.

Call collect or write today!

Models & Prices

DA-6/E 1x6 (table top)	\$ 145
DA-6R/E 1x6 (rack)	\$ 165
DA-6BR/E 1x6 (rack, indiv. cont.)	\$ 179
DA-6RS/E 2x12 (rack)	\$ 239
DA-16BR/E 2x16 (rack, meter, etc.)	\$ 295
DA-2080 up to 20x80 (rack)	\$325 - \$1,675

RAMKO RESEARCH

3516 C LaGrande Blvd.
Sacramento, California 98523
Telephone (916) 392-2100

64 For More Details Circle (48) on Reply Card

Zoom in!

(This column will feature ASTVC personalities who, from time to time, will tell their stories of interesting events or incidents taking place while telecasting or taping in the studio or on location. This story is sent to us by Al Camoin, NBC cameraman and a member of the board of ASTVC.)

Air date:
March 9, 1976...

"A couple of very interesting events occurred on my recent trip to California to tape the GO show. This special was based on stunt men and how their stunts are performed.

We chose Lake Piru, Ventura County, as our main location for the taping. We had our normal first day jitters, but everything was going

(Continued on page 66)

TEKTRONIX*



Why?

Tektronix makes great *waveform monitors*. But they're a case of overkill in non-broadcast applications where the more than satisfactory UAP WM31 at

only \$725 allows you to s-t-r-e-t-c-h that tight budget. (The \$500 you save will almost pay for another WM31). Besides, WM31's sensational single-line/single-field sweep not only centers the display on the screen where it belongs (sorry about that, Tek) but gives you the same width of display on a 3-inch CRT that you get in the (off-center) half of the expensive 5-inch tube (touché!). WM31 also lets you see *all* the synch (*twice*, at that!) instead of $\div 2$ circuitry. We must be doing something right. Get the details and see why.

*Tektronix, Inc., trademark

Ultra Audio Products

BOX 921 BEVERLY HILLS, CALIF. 90213
(213) 276-2726

For More Details Circle (47) on Reply Card

MARTI...

The Name to Remember . . .

RADIO REMOTE PICKUP 150 - 450 MHZ



RPU Transmitter
\$975.00 (150 MHZ)
\$1145.00 (450 MHZ)

FEATURES: • All Solid-State • Direct FM Modulator • Broadcast Quality — Continuous Duty • Four Audio Mixing Channels • Plug-in Modular Construction • I.F. Crystal Filter • Taut Band Meters

Radio Remote Pickup Equipment is versatile, dependable and an entree to profitable radio broadcasting. That is the acclaim given to Marti RPU Equipment by American Radio Broadcasters. "How did we ever operate a radio station without it?", is the comment most often heard after equipment has been purchased and put into service.

The progressive minded, community spirited broadcaster, can find many uses for Remote Pickup Equipment. He will do many more remotes than he is presently doing, simply because the equipment is available at a moment's notice. To coin an old cliché, "It doesn't cost — it pays."

Add Color to Your Remotes . . .

PORTABLE BROADCAST REMOTE PICKUP TRANSMITTER

Model RPT-1
\$495.00 (150 MHZ)

FEATURES: • Portable operation on internal rechargeable nickel-cadmium battery. Total weight only 5 1/4 lbs. • All Solid-State • Built-in battery charger • Dual frequency operation (One crystal included) • Meter indicates battery condition and modulation • Whip antenna mounted directly on unit • Broadcast-quality Compressor/Limiter handles toughest remote pickup conditions • Two microphone inputs (one push-to-talk) and one Hi-Level input each with individual mixing gain control

COMPLETE LINE OF ACCESSORIES AVAILABLE

MARTI Electronics, Inc.
Box 661 • Cleburne, TX 76031 • 817/645-9163

For More Details Circle (46) on Reply Card

Products

(Continued from page 63)

low-noise characteristics. This combination of good limiting action, low noise and low distortion is ideal for demanding applications in the broadcast industry.

The ITI-TLC 666 Bridging Amplifier provides monitoring capability. Its input impedance of 100K ohms assures that a bridging connection will not alter the transmission characteristics of the line, introduce noise, or diminish the level of signals being monitored.

For More Details Circle (70) on Reply Card

Remote TV Antenna

Nurad, Inc., has developed a new circularly polarized transmit antenna called the Goldenrod. The Goldenrod, to which Nurad has given the designation Model 20 HE1, is approximately equivalent in performance to a two-foot parabolic antenna with feed, but presents far less wind loading, is much easier to handle and store, and less susceptible to damage from handling. As such, it is well suited for use as a transmit-antenna complement to Nurad's Quad Polarized 2 GHz Receive Antenna System that is now being employed by over fifty metropolitan stations in their remote TV broadcast operations.

For More Details Circle (71) on Reply Card

Tape Velocity Indicator

Pacific Recorders and Engineering has announced the availability of their TVI (Tape Velocity Indicator), a digital variable speed ($\pm 33\%$) for use with the MCI JH-110, JH-100, and JH-114 tape recorders.

Ten-turn vernier speed control provides the fine adjustment capability to shave time off a "61 second" spot, sharpen a flat, compensate for off-speed tapes, and accomplish any number of special effects, such as flanging and delay. Front panel button switching selects between fixed (crystal) and variable speed.

For More Details Circle (72) on Reply Card

angénieux service corporation of california
13381 BEACH AVE. VERNICE, CALIF. 90791 • (713) 821-5080
FACTORY SERVICE CENTERS
REPAIRS • PARTS
ACCESSORIES
angénieux service corporation of new york
1500 OCEAN AVE. BOHEMIA, N.Y. 11716 • (516) 567-2424



For More Details Circle (35) on Reply Card

For Tape Heads Head for TABER

At Taber you get precision work, quality results and low price ... unmatched by any other audio head manufacturer.

TABER professional audio heads are available in full track through 16 track configurations including 1/4" 4 channel for your Ampex 440 series and Scully 280 series recorders.

TABER provides expert and prompt reconditioning service for all audio head configurations.

Loaner assemblies are available.

For heads, head for Taber ... the best source available.

Send for free brochure.




TABER

Manufacturing & Engineering Company
2081 Edison Ave. • San Leandro, Ca. 94577 • (415) 635-3831

For More Details Circle (44) on Reply Card

contact ALLIED before you buy or trade

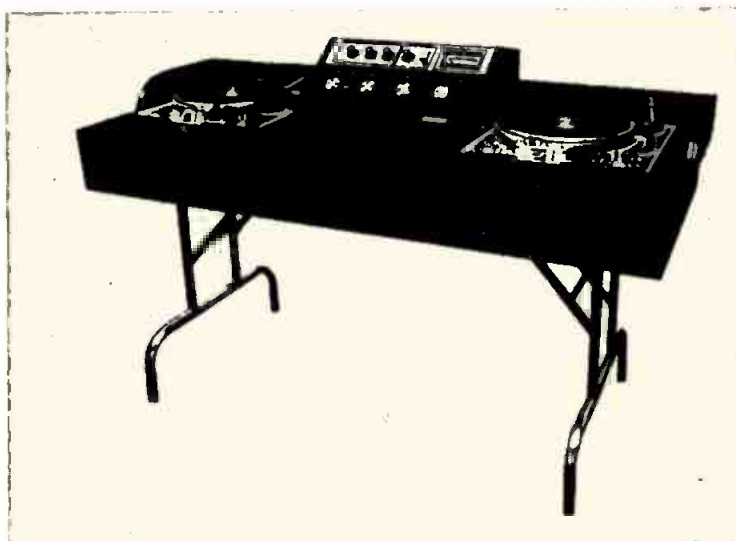

\$1275.⁰⁰


IF YOU ARE NOT RECEIVING OUR MONTHLY CATALOG CALL OR WRITE

317- 962-8596

ALLIED BROADCAST EQUIPMENT
124 South 6th Street
Richmond, Indiana 47374

For More Details Circle (45) on Reply Card

System 90... the first micro-computer program automation controller!

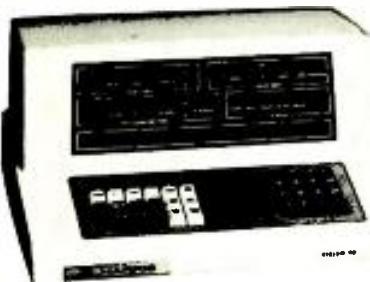

Now, Harris micro-computer technology offers you:

- 15 exclusive features
- Extremely versatile format control
- Easiest operation
- More "brain power" per dollar

There's much more, and we'd like to tell you all about it. Write Harris Corporation, Broadcast Products Division, 123 Hampshire Street, Quincy, Ill. 62301.



HARRIS
COMMUNICATIONS AND
INFORMATION HANDLING

For More Details Circle (60) on Reply Card

Zoom In

(Continued from page 64)

well. The next shot was to involve two stunt cars and a motor cycle. The cycle was to race through a dirt gully while our car was chasing the other on a paved road. At a particular point, the cycle was to cross between the two racing cars.

The cameraman at the taping that day was Bob Keyes who was stationed on the road at the crossover point. Bob was using the hand-held "90". I, with a PCP 70, was positioned on a hill overlooking the entire stunt. Tape was rolling as the cars sped towards us....Suddenly, the unexpected happened! The cycle was a second or two late at the crossover and the second car had to swerve to avoid colliding with the cycle which was now airborne.

At that point the accident happened. The second car was now in an uncontrolled skid and Bob and our Mobile Unit were in its path!

It all happened in seconds. The car hit Bob and then collided with the Compact Mobile Video Unit.

You can imagine the panic. Everyone ran to see how Bob was. When I got there, I saw Bob lying under the car.

Roger Harbaugh, acting as camera assistant, was also lying on the embankment. Bob was hurt, but we didn't know how badly. Roger was shaken, but OK. Fortunately, the unit manager had arranged for an ambulance to stand by for the entire taping and so Bob was immediately taken to the hospital.

Later, we were told about Bob's injuries. X-rays revealed several cracked ribs and minor bruises but otherwise he was all right. Our prayers were answered. The amaz-

ing Bob, cameraman that he is, came back two days later to finish his job...."

Take 2!...

JIM SCHOONMAKER
at WCIX...
(Miami, Fla.)

(What are some of the typical "chores" that ASTVC members find themselves involved with at their various stations throughout the USA? Jim Schoonmaker relates his day.)

"Ops personnel at CIX work in both the studio and ON-AIR ops since all breaks are reel-to-reel (film and VTR). Thus, there is a four-person on-air crew: switcher, audio/log-keeper, projectionist, and tape operator.

People tend to move around among the different jobs, including running camera in the studio. I do audio, projection, and some camera. I'd like to get into tape (I've already done some of that) and then switch.

On-the-air ops are very harried because every break is local, but if you can handle things here, another station would be no problem."

(Thanks for your report, Jimmy. If it's any comfort to you, the Nightly News control room seems to be "slightly harried" from time to time...so you see, you're in good company.)

Take 3!...

NEW ADDRESS!...

Please take note of the mailing address for applications, inquiries, etc. Send them to: BOX 296, Sparkill, New York 10976. Articles for the column should continue to be sent to: BOB ZWECK, Room 670, NBC, RCA Bldg., NYC 10020.

Electric Rain Gauge

Model 525

Now you can report minute-by-minute rainfall amounts and not get wet! This new, low cost, remote-reading gauge shows announcer rainfall accumulations in 1/100 inch increments. Transmitter can be located several hundred feet away and is completely automatic—needs no service or attention. Ask for Spec. Sheet, Model 525. Free.

Also, a complete line of
Texas Weather Instruments
Electronics, Inc.
P. O. Box 7225B (214) 631-2490
Dallas, Texas 75209



For More Details Circle (49) on Reply Card

BROADCAST ENGINEERING



Jack Hansen, WFMJ, Frederick, Md.

Directional Antenna Monitoring Simplified

With the Model AM-19D (210) Digital Antenna Monitor, accuracy is assured and operating cost savings are realized. Now antenna phase angle and loop current ratio readings can be taken by lesser grade operators. The easy-to-read numeric readout provides exact readings and eliminates interpretation errors common with conventional meters. Resolution is 0.1° for phase angle and 0.1% for current ratio.

Contact us now on this and other FCC type approved Antenna Monitors.

POTOMAC INSTRUMENTS

932 PHILADELPHIA AVE.

SILVER SPRING, MARYLAND 20910 (301) 589-3125

U.S. Color

(Continued from page 63)

ment, has not had the luxury of consistently going with "top of the line" equipment and being able to justify the engineering hours required for an uncompromising engineering regimen. In the majority of other countries TV quality standards were initially set by a public-funded television system that did not find itself in a strict cost-competition situation.

The Future of U.S. Quality

There are already some signs that U.S. consumers are becoming much more concerned with video and audio quality. The public awareness about hi-fi audio equipment in radio and recordings is testimony to the fact that a large percent of the public can recognize the desirability of a higher quality and even be willing to pay for it.

Once this generation of color receivers saturate the consumer market and viewers become accustomed to a stable color picture, something will have to be offered to entice potential buyers to upgrade their receivers. A number of im-

provements are still needed to reflect the full quality potential of the NTSC system.

It will probably be at about this time that a 1,000-plus line, high resolution, jumbo screen television system will be introduced. Already two rather promising approaches to greatly shrinking the RF bandwidth required for the broadcast (or cablecast) of high resolution video have been unveiled. The emerging popularity of video projection systems will undoubtedly accelerate the need for a high resolution system. A television system with over 1,000 lines would provide the same resolution as average 35mm motion picture film, such as used at your local motion picture theater. Or, to put it another way, a system with 1,000-1,050 lines would make it possible to focus a high resolution camera (we've got those too) on this page and viewers at home would be able to read every word. A high number of lines such as this, coupled with the supporting bandwidth capability, effective in-

(Continued on page 69)

For More Details Circle (52) on Reply Card

Accurate Field Strength Measurements Can Be Easy

With the Model FIM-21, electromagnetic field strengths can be measured to within 2% across the entire 535 to 1605 KHz AM band. And to intensity levels as low as 10 μ V/m. Its integral shielded antenna in the cover, front panel speaker, large illuminated mirrored meter, and ganged oscillator/receiver tuning, make it easy to operate in the field. An optional telescoping stand adds convenience. It's also a versatile instrument — use it as a tuned voltmeter for RF bridge measurements.

Contact us now for complete details on our line of field strength meters.



POTOMAC INSTRUMENTS

932 PHILADELPHIA AVE.

SILVER SPRING, MARYLAND 20910 (301) 589-3125

For More Details Circle (53) on Reply Card

SBE (Continued from page 45)

screening and testing with computerized circuit-board testing. (H. J. "Bart" Paine, Chairman, Chief Television Engineer, University of Arizona, College of Medicine, Tucson, Arizona 85724. (602) 882-6644).

Chapter 36: San Diego, Calif.

Chapter 36 met on Thursday, February 26, at KCST in San Diego to meet Mr. John Baumann of Broadcast Communication Devices,

Inc. He reported on a new convergence editing system for video and acquainted members with other equipment made by Optec Engineering. (Bill Montgomery, Secretary/Treasurer, SBE, 6841 Convoy Court, San Diego, California 92111, (714) 556-8080).

Chapter 37: Washington, D.C./Northern Virginia

SBE members in the greater metropolitan area held a joint

meeting in February with the Audio Engineering Society at the WTTG studios in Washington, D.C.

Central Florida

One of the more recent, soon-to-be-chartered Chapters held its meeting in February at the Channel 24 studio in Orlando. Mr. Terry Lloyd, of TFT, and Mr. Dick Cunningham, of BCS Associates, Inc., held a slide show and seminar on EBS. A discussion period followed. (John Weyrick, Chairman, 5765-F Kingsgate Drive, Orlando, Florida 32809. (305) 857-3729).

When accuracy Counts...Count on Belar for AM/FM/TV MONITORS




BELAR
AM MODULATION MONITOR

BELAR CALL ARNO MEYER (215) 687-5550
ELECTRONICS LABORATORY, INC.
LANCASTER AVENUE AT DORSET, DEVON, PA. 19333 • BOX 826 • (215) 687-5550

For More Details Circle (54) on Reply Card

Whatever your film chain, EEV can wrap up your Vidicon needs.

We have the tubes you need, when you need them. We can send matched sets—or singles selected for appropriate color channels. Full technical back-up service available. For technical data and details of our very competitive prices, contact us now.

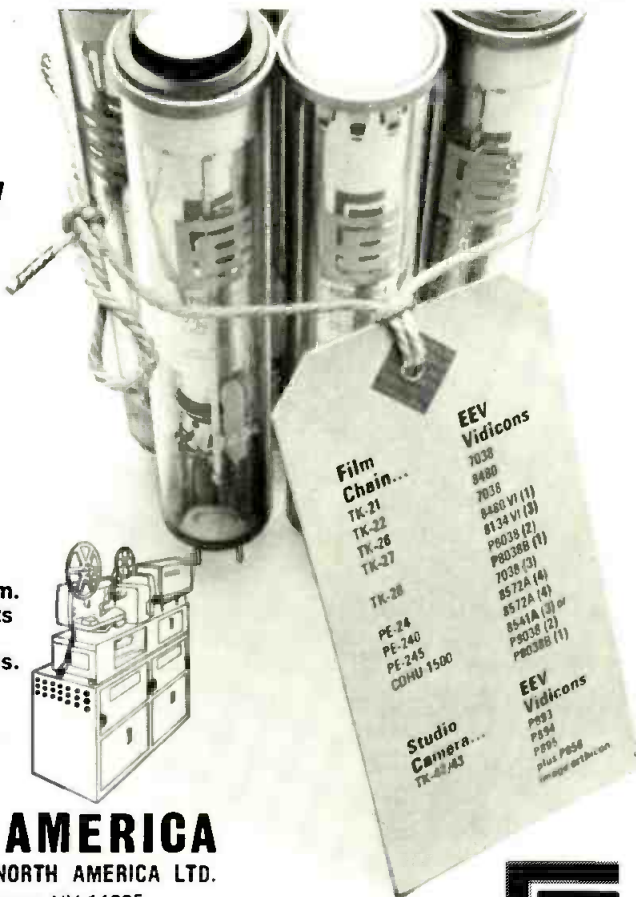

EEV NORTH AMERICA

ENGLISH ELECTRIC VALVE NORTH AMERICA LTD.

1 American Drive • Cheektowaga, NY 14225
(716) 632-5871 • TWX: (710) 523-1862
67 Westmore Drive • Rexdale, Ontario M9V 3Y6
(416) 745-9494 • Telex: 06 965864
A member of the GEC-English Electric Group of Companies



For More Details Circle (55) on Reply Card

WATCH WHAT YOU HEAR



Great sound is in sight with the Amber Audio Spectrum Display. The Amber 4550 produces a graphic representation of spectral energy content in real time; objective visual analysis zeros in on your target sound. The 4550 provides greater transmission, production, and maintenance control, and even gives you a good look at what the competition is up to. Two independent memories accumulate information for before and after observations. Compact and low cost, easy to set up and easily used by non-technical personnel. Set your sights on winning sound with the Amber 4550 Audio Spectrum Display. Write for more information.

amber

AMBER ELECTRO DESIGN LTD
1064 chemin du Golf
MONTRÉAL QUÉBEC CANADA
H3E 1H4
(514) 769 2739

Exclusive export agent Gotham Export Corporation, New York.

For More Details Circle (56) on Reply Card

QUALITY TALKS FOR WENE

Endicott, New York



Continental's new 5/10 kW AM transmitter is setting records for acceptance. It has performance and efficiency, with the cleanest sound around. Listen to Continental: quality talks.

Continental
Electronics

CONTINENTAL ELECTRONICS MFG. CO.
BOX 17040 DALLAS, TEXAS 75217

For More Details Circle (57) on Reply Card

U.S. Color

(Continued from page 67)

terlacing, etc., would render the scanning lines almost invisible, even for a screen measured in feet at a close viewing distance. Under these conditions television would no longer be basically a "close-up medium," since the eye would be able to select details or small areas from the large screen to concentrate on, much the same as it does in theatre or in "real life."

Possibly, just as the United States pioneered the way for color television in the world, we can also introduce a practical high resolution television system which would again be the basis for a world standard in the coming decades. And, maybe this time political egos, or whatever, can be pushed aside for an internationally compatible system which will facilitate the exchange of programming between the countries of the world. Could engineers make possible international channels of communication where diplomats and politicians have failed? ☐

FUJINON BCTV LENSES*



- | | | |
|--|--------------------------|--|
| 1. Complete Field Zoom
(Pictured above)
With 1.5x and 2.5x
servo operated built-in
extenders. | 1 1/2"
22x25
f:2.2 | 1"
22x18
f:1.8 |
| 2. Wide Angle Lens
Compact and shortest
M.O.D. with built-in 2x
extender. | 10x15
f:2.8 | 10x11
f:2.1 |
| 3. Studio Standard
High transmission,
aberration free, short
M.O.D. multi-range
lens. | 16x17
f:2.1 | 16x13
f:1.6 |
| 4. Low Cost Field Zoom
Available with 1.5x and
2.5x add-on extenders. | 14x37.5
f:2.2 | 14x29.5
f:1.8 |
| 5. Low Cost Studio
Standard
High quality, compact
lens with normal range. | | K10x16
f:2.0 |
| 6. ENG Lenses
(Pictured below)
Extreme light gather-
ing power with ideal
ranges of zoom and
focusing. | 1"
K7x11
f:2.0 | 3/4"
A10x10
f:1.9
A7x9
f:1.4
A6x12.5
f:2.0 |
| Extreme Width Angle
Fixed Focus Lens. | KF9A
f:1.8/9mm | AF6A
f:1.4/6mm |

Special and Exclusive:

- | | |
|--|--|
| 7. Rota-Version
Image rotation and
inversion optical
system. | Mounted between
3pbo 1 1/4" color
camera and zoom
lens. |
|--|--|




*All Fujinon BCTV Lenses have Electron Beam Coating, the world's most advanced lens coating process. EBC makes our lenses the almost perfect transmitters of light. Thus, our zoom lenses' ability to transmit light remains remarkably constant from wide angle to telephoto.

FUJINON

Fujinon Optical, Inc., 420 West End Avenue
New York, N.Y. 10024 Phone: (212) 724-9834

For More Details Circle (59) on Reply Card

it bench mark cartridge machines

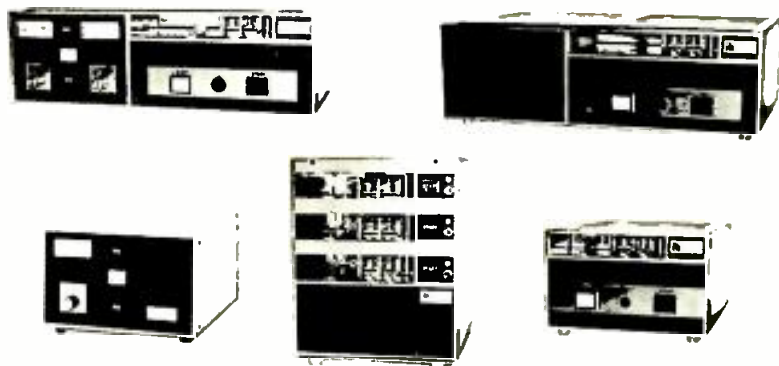

Measure all others against us

Other cartridge machines are copies of ITC's, but won't perform like ITC's. The differences are inside. Design innovations, master workmanship and superb customer services are ITC marks of leadership in quality cartridge equipment. We'll prove it with our famous 30-day guarantee of satisfaction. Write. Or phone us collect: 309-828-1381.

it INTERNATIONAL TAPETRONICS CORPORATION
2425 SOUTH MAIN ST., BLOOMINGTON, ILLINOIS 61701

Marketed in Canada exclusively by McCurdy Radio Industries Ltd., Toronto, Ontario


Form 113-0004

© 1975 by ITC

For More Details Circle (58) on Reply Card

April, 1976

69

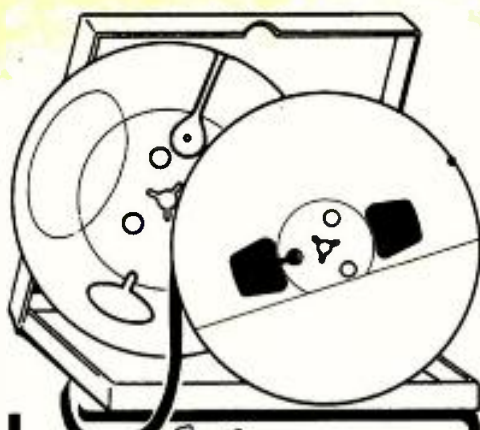

complete supplies for reel to reel audio recording

TAPE

AMPEX and Scotch
all professional grades
on reels or on hubs

EMPTY REELS

all sizes, widths
and hub types

BOXES

for all reels, in various colors

LEADER, TIMING & SPLICING TAPES

Top Quality Competitive Pricing
Immediate Shipment
Call or Write for our Catalog



recording supply corp.
1291 RAND RD - DES PLAINES, IL 60018
312/297-0955

For More Details Circle (62) on Reply Card

V-LOCK HELICAL for BROADCAST



The VS-1000 is an accessory especially designed for 1/2" and 3/4" helical VTRs. Requiring no modification to the VTR, it will V-lock virtually any machine now on the market.

- UPGRADES VTR to true V-lock
- IDEAL companion to any TBC
- TRUE V-LOCK never requires adjustment of V-phase
- HOOKS-UP in just seconds
- TAPE PLAYER becomes an economical broadcast source
- ELIMINATES heterocolor moiré
- IMMUNE to power line frequency changes

oregon magnetics

P.O. Box 13374 (503) 233-8295
Portland, Oregon 97213

For More Details Circle (63) on Reply Card

advertisers' index

Acrodyne Industries, Inc.	59
Aderhold Construction Company	70
Allied Broadcast Equipment	65
Amber Electro Design	68
Amplex Corporation	18, 19
Angenieux Corp. of America	65
Automated Processes, Inc.	1
Belar Electronics Laboratory, Inc.	68
Berkey Colortran	33
Broadcast Electronics, Inc.	10
Broadcast Engineering	37
CMX Systems	9
CSI Electronics, Inc.	25
Canon Video	13
Central Dynamics	Cover 2
Chyron Telesystems	63
David Clark Communications	44
Comprehensive Service Corporation	CE-4
Continental Electronics Mfg. Co.	69
dbx, Inc.	12
Datatek Corporation	22
Datavision, Inc.	42
Ditch Witch Trenchers	CE-3
Dynair Electronics, Inc.	Cover 3
Dynasciences Corporation	62
ES Enterprises	45
Electronic Devices	62
English Electric Valve North America	68
Farinon Electric	39
Fidelipac	43
Fujinon Optical	69
The Grass Valley Group	3
Clifford B. Hannay & Son, Inc.	59
Harris Corporation	14, 15, 66
International Tapetronics Corp.	20, 69
Jamieson Film Company	16
McMartin Industries, Inc.	7, 62
Marti Electronics	64
Micro Consultants	29
Minneapolis Magnetics, Inc.	59
Opamp Labs, Inc.	70
Oregon Magnetics	70
Phillips Audio Video Systems	11
Potomac Instruments, Inc.	67
RCA Distributor and Special Products	17
Ramko Research	64, 31
Recording Supply Corporation	70
Scully/Metrotech	52
Shure Brothers, Inc.	Cover 4
Sparta Electronics Corporation	5
Spotmaster	10
Stainless, Inc.	57
Systems Marketing Corporation	49
Taber Manufacturing	65
Telex Communications, Inc.	51
Texas Electronics, Inc.	66
Thermodyne International Ltd.	60
Thomson-CSF Laboratories, Inc.	45
Tiner Communications Service, Inc.	21
UREI	61
Ultra Audio Products	64
Unimedia	16
Video Aids Corp. of Colorado	60
Wilkinson Electronics, Inc.	58

BUILD A BETTER STUDIO

Call Aderhold Construction Company. A complete construction management team of architects, builders, engineers and designers. No problem too large or too small. 404/233-5413.



Aderhold Construction Company

3384 Peachtree Rd. NE / Atlanta, Georgia 30326

For More Details Circle (90) on Reply Card

FREE CATALOG & AUDIO APPLICATIONS



CONSOLES
KITS & WIRED
AMPLIFIERS
MIC, EQ, ACN,
LINE, TAPE, DISC,
POWER
OSCILLATORS
AUDIO
TAPE BIAS
POWER SUPPLIES

OPAMP LABS, INC.
4033 N. SYCAMORE AVE
LOS ANGELES, CALIF. 90038
(213) 934-1888

For More Details Circle (91) on Reply Card

PROFESSIONAL SERVICES

VIR JAMES

CONSULTING RADIO ENGINEERS
Applications and Field Engineering
Computerized Frequency Surveys
345 Colorado Blvd.
Phone: (Area Code 303) 333-5562
DENVER, COLORADO 80206
Member AFCCE

RALPH E. EVANS ASSOCIATES

Consulting Telecommunications Engineers
AM-FM-TV-CATV-ITFS
3500 North Sherman Boulevard

MILWAUKEE, WISCONSIN 53216
PHONE: (414) 442-4210 Member AFCCE

SMITH and POWSTENKO

Broadcasting and Telecommunications
Consultants

2000 N. Street, N.W.
Washington, D. C. 20036
(202) 293-7742

Joseph & Donna Roizen VIDEO CONSULTANTS

International TV Systems
Marketing/Technical Writing
800 Welch Rd., Suite 354
Palo Alto, Ca. 94304
Tel: (415)326-6103

LIGHTNING ELIMINATION ASSOCIATES CONSULTING ENGINEERS LIGHTNING RELATED PROTECTION

strikes - surges - transients, etc.

ROY B. CARPENTER, JR. - DIRECTOR
9102 Firestone Blvd., Downey Ca. 90241
(213) 923-1268 Cable: LEAINC

MIDWEST ENGINEERING ASSOCIATES

Consulting Engineers
6934 A N. UNIVERSITY
PEORIA, ILLINOIS 61614
(309) 692-4233

James Tiner, President

TINER COMMUNICATIONS SERVICE, INC.

"We Specialize in Towers"
Complete Tower and Antenna
Installation and Service

P.O. Box 3827, 15201 Hickman Road
Des Moines, Iowa 50322 (515) 278-5501

P. H. LEE ASSOCIATES, INC.

Over 36 Years in Communications
And Broadcast Engineering

AM-FM-TV Frequency Measurements
P.O. Box 1575
Thousand Oaks, Calif. 91360
(805) 492-5055 (213) 889-7769

PROFESSIONAL SERVICES

**TELECOMMUNICATIONS
AND
BROADCAST CONSULTANTS**

Tabcon Inc.

Sales / Programing / Management / Engineering
Field Services

4425 East 31st St
Tulsa, Okla. 74135

918-742-5410

W. H. BRADLEY, P.E.

*Consulting Radio Engineer
Engineering Applications
& Field Engineering*

Phone: 918-245-5444
300 West 41 Street,
SAND SPRINGS, OKLAHOMA, 74063

DAWKINS ESPY

Consulting Radio Engineers
Applications/Field Engineering
P.O. Box 3127 Olympic Station 90212
Beverly Hills, California
(213) 272-3344

CLASSIFIED

Advertising rates in Classified Section are 25 cents per word, each insertion, and must be accompanied by cash to insure publication.

Each initial or abbreviation counts a full word. Minimum classified charge, \$2.00.

For ads on which replies are sent to us for forwarding (blind ads), there is an additional charge of \$3.00 per insertion, to cover department number, processing of replies, and mailing costs.

Classified columns are not open to advertising of any products regularly produced by manufacturers unless used and no longer owned by the manufacturer or a distributor.

TRAINING

FIRST PHONE in six to twelve weeks through tape recorded lessons at home plus one week personal instruction in Boston, Philadelphia, Detroit, Atlanta, Kansas City, Seattle or Los Angeles. Our twentieth year teaching FCC license courses. Bob Johnson Radio License Preparation, 1201 Ninth, Manhattan Beach, Calif. 90266, Telephone 213-379-4461. 8-75-1f

GET YOUR FIRST TO GET THERE FIRST! DON MARTIN SCHOOL OF COMMUNICATIONS/ Since 1937, training Broadcasters for Broadcasting! 1st Phone training using latest methods and completely equipped Transmitter studio. Call or write for details and start dates. Don Martin School, 7080 Hollywood Blvd., 5th floor, Hollywood, CA 90028. Call (213) 462-3281 or (213) 657-5886. 8-75-1f

PASS FCC EXAMS with Ameco books. Each book contains FCC questions plus simplified answers plus FCC-type exams and answers. 3rd class includes broadcast endorsement \$1.00. 2nd class \$2.25, 1st class \$1.50. Free catalog. Ameco Publishing, 275G Hillside Ave., Williston Park, N.Y. 11596. 8-72-1f

PASS FCC first and second class exams with new 21-lesson, 450-page course. Starts with basic electricity. Over 600 FCC-type, multiple-choice questions and sample exams included. No previous technical knowledge required. Commercial Radio Operator Theory Course, #15-01. Only \$5.95. Ameco Publishing, 275G Hillside Ave., Williston Park, N.Y. 11596. 8-72-1f

TRAINING (CONT.)

EARN YOUR ELECTRONICS DEGREE by correspondence, G. I. Bill approved. For free brochure, write Grantham School of Engineering, Information Desk, 2000 Stoner Avenue, Los Angeles, Calif. 90025. 8-72-1f

BROADCAST ENDORSEMENT and third phone preparation on cassettes. Illustration book includes current FCC-type exams. Radio License Preparation, 1201 Ninth, Manhattan Beach, Calif. 90266. 8-75-1f

SERVICES

COMMERCIAL RADIO MONITORING CO. Precision frequency measurements since 1932. Local and mobile service covering entire midwest plus. Test instruments, counters, monitors repaired and certified. Lee's Summit, Mo. 64063. (816) 524-3777. 9-74-1f

SPOTMASTER PARTS—24 hour service. Repairs and rebuilding of your Spotmaster equipment. Franchised Spotmaster repair service. 90 day warranty. COMMUNICATION MEDIAS/BROADCAST COMPONENT DISTRIBUTORS, P.O. Box 54, Allentown, Pa. 18105, 215-437-0607. 6-75-12f

ONE STOP FOR ALL YOUR PROFESSIONAL AUDIO REQUIREMENTS. Bottom line oriented. F.T.C. Brewer Company, P.O. Box 8057, Pensacola, Florida 32505. 7-71-1f

HELIX-STYROFLEX. Large stock—bargain prices—tested and certified. Write for price and stock lists. Sierra Western Electric, Box 23872, Oakland, Calif. 94623. Telephone (415) 832-3527. 1-73-1f

BUILD YOUR OWN TV AND RADIO PRODUCTION EQUIPMENT. Easy, inexpensive, (mostly IC). Plans or kits: Special Effects Generator, Automatic Logger, Vertical Interval Video Switcher, Solid State Lighting Board, Preset Audio-Video Board, Preset Lighting Board, Crystal Controlled Wireless Mikes with Matching receivers. Subsonic Tone Control for audio tapes, 8MM SOF Cameras and Projectors, Distribution Amplifiers (Sync. Video, Audio), Audio Control Boards (Studio & Remote) Proc-Amp with compensation and regeneration for adapting Helical Scan VTR's to broadcast standards. PLUS specialized correspondence courses in TELEPHONE Engineering (\$39.50), and Integrated Circuit Engineering (\$49.50). Plans from \$5.95 to \$15. SUPER CATALOG plus years update of new devices Air Mailed \$1.00. Don Britton Enterprises, P.O. Drawer G, Waikiki, Ha. 96815. 5-74-24f

CAMERA TUBES...ALL TYPES EXCEPT ORTHICONS CAN NOW BE RECONDITIONED AT AN UNBELIEVABLE PRICE, LEAD OXIDE TYPES \$300.00, VIDICONS FROM \$35 TO \$200.00. ALL RECONDITIONED TUBES COME WITH 500 HOUR WARRANTY. FOR DETAILS WRITE: RODONCO ENGINEERING, CAMERA TUBE DIV., 4020 STAPLETON DR., BLOOMINGTON, IND. 47401. 8-75-1f

STILL LOOKING for good Cartridge Rebuilding? Quit looking—we're here! Rocky Mountain Cartridge, Box 1676, Pueblo, Colo. 81004. 4-76-1f

FREQUENCY MEASURING SERVICE—WE'RE #2 —MONITOR REPAIRS—MOBILE UNIT—covers Northern 3/4 Ill., Eastern Iowa, Eastern Minn., Southern 3/4 Wis., Western Mich., and Western Ind., monthly. Radio Aids, 528 Ravine Ave., Lake Bluff, Illinois 60044, (312) 234-0953. 2-74-1f

WANTED

WANTED: All surplus broadcast equipment especially clean A.M. & F.M. transmitters, capacitors, 112 Clark & Potomac Phase monitors, Field Strength Meters, etc. High prices. All custom duties paid. Surplus Equipment Sales at 2 Thorncliffe Pk. Dr., Unit 28, Toronto 17, Ont., Canada (416) 421-5631. 1-76-1f

WANTED: Pre-1926 radio equipment and tubes. August J. Link, Surcom Associates, 305 Wisconsin Ave., Oceanside, Ca. 92054, (714) 722-6162. 3-76-1f

WANTED (CONT.)

WANTED: WX2 or 120 series FS meter in good condition. Contact Chris Hood, 11 E. Prospect Avenue, Pittsburgh, Pa. 15205, 412-921-2943. 3-76-2f

WANTED: Approximately 470' of 7/8" Helix. May be new or used as long as in serviceable condition. C. Barney Scholl, 32 Shenango St., Sharon, Pa. 16146. 4-76-1f

EQUIPMENT FOR SALE

EMPIRE NF105W, interference intensity meter, 4 plug-ins, \$1500.00. **ROHDE-SCHARTZ FMV** deviation meter, \$1000.00; **JERROLD 704B,** \$200.00 (904) 587-5263. 3-76-2f

SPOTMASTER, FIDELIPAC, RUSSCO, ROH, ELECTRO-VOICE, OTARI, RAMKO, SCOTCH, STANTON, NORTONICS, SHURE, SENNHEISER, TELEX, MAGNECORD, and VIKING are all items distributed and serviced by COMMUNICATION MEDIAS/BROADCAST EQUIPMENT DISTRIBUTORS, P.O. Box 54, Allentown, Pa. 18105. 215-437-0607. "Sudden Service" our specialty. 6-75-12f

MOTORS FOR SPOTMASTERS

NEW Paps hysteresis synchronous motor HSZ 20.50-4-470D as used in series 400 and 500 machines. Price \$49.00 each prepaid, while they last. 90 day warranty. Terms check with order only, no COD's. Not recommended for Tapecaster series 600 or 700.

TAPECASTER TCM, INC., Box 662
Rockville, Maryland 20851

1-72-1f

FOR SALE: Television STL System Raltheon KTR 2-7 GHZ dual link for audio and video complete with ant., trans. line, and 8' X 12' reflector. Also TR 22 High band color video tape machine. Write **WXON-TV,** P.O. Box 2020, Southfield, MI, 48075 or call 313-355-2901. 11-75-1f

SPOTMASTER EQUIPMENT AND PARTS now in Texas from Sales Southwest, 4002 Houston Highway, Victoria, Texas 77901. 512-578-4323. 11-75-1f

FULL LINE TUNING and phasing components available, including contractors, also large supply separate contacts for E. F. Johnson contractors. Write: Geleco Electronics, Ltd., #2 Thorncliffe Park Drive, Unit 28, Toronto 17, Canada. Phone: (416) 421-5631. 2-75-1f

MICA AND VACUUM transmitting capacitors. Vacuum relays. Large stock; immediate delivery. Price lists on request. **SURCOM ASSOCIATES,** 305 Wisconsin Ave., Oceanside, Ca 92054, (714) 722-6162. 3-76-1f

WHATEVER YOUR EQUIPMENT NEEDS—new or used—check us first. We specialize in broadcast equipment. Send \$1.00 for our complete listings. Broadcast Equipment & Supply Co., Box 3141, Bristol, Tenn. 37620. 3-75-1f

MAGNECORD PT6-A RECORDERS. Rebuilt units and new and used Magnecord, Telex, Viking, and Spotmaster parts. Huge supply, lowest prices. **REBUILT CARTRIDGE TAPE EQUIPMENT.** Spotlessly clean and thoroughly tested. 30 day moneyback guarantee. **ONE YEAR** warranty. **REPAIR AND RECONDITIONING SERVICES** for cartridge equipment by factory trained technicians. Send for complete information: **AUTODYNE,** Box 1004, Rockville, Md. 20850, (301) 762-7626. 8-75-1f

BROADCAST CRYSTALS for AM, FM or TV transmitters. frequency change, repair or replacement of oven types. Also new vacuum types for RCA, Gates, Collins, etc. transmitters. Quality products, reasonable prices and better delivery! Don't be without a spare crystal. Frequency change and service for AM and FM frequency monitors. Over 30 years in the business. **Eidson Electronic Co.,** Box 96, Temple, Texas, 76501. Phone (817) 773-3901. 12-74-1f

USED RCA TR-22B VTR—High Banded with Editor, DOC, Compressor, used Headwheel panel, Auto guide and Cue. Low hours, no problems. Call **Lowell Shore,** 616-775-3478. 4-76-2f

EQUIPMENT FOR SALE (CONT.)

GE PE-250 Color Camera, GE TY-106B helical antenna ch. 22, Collins stereo console 212S-1, more items on list. S. R. Cathrall, WEZF-TV, Box 22, Burlington, Vermont 05401, (802) 655-3663. 4-76-3t

SELF SUPPORTING pipe mast, six sections. Two each—20' x 24" diameter, 20' x 19 1/2" diameter, 23' x 15" diameter with base and de-icing. Bognor B4UAM transmitting antenna, Channel 79. 120' of Andrew 3-1/8" Heliax transmission line. Purchaser to dismantle and remove from present site on 17-floor office block. Bids should be submitted to Mr. F. T. Klinkhammer, Channel SeventyNine Ltd., 99 Queen St. E., Toronto, Ontario. 4-76-1t

350 FT. IDECO self-supporting, heavy-duty, galvanized, triangular steel tower. Dismantled, with two beacons, clearance lights, photo electric controls and flasher, bolts and nuts. Bundled, ready to ship, \$35,000.00. Have prints, (608) 784-7373, William Bruring, WWLA, La Crosse, Wisconsin 54601. 4-76-4t

SONY MV 10,000 high band, two-inch helical scan videocorder with CVS 500 time base corrector. Machine has only 120 hrs on it. Also: IVC 960CD one inch color video recorder with complete edit functions. We are now accepting offers. Premore Productions, 9336 West Washington Boulevard, Culver City, Ca. 90230 (213) 870-6011. 4-76-1t

DIMMER—Brand new, untouched Century 6-circuit Remote-Control 2-scene-preset "Dimmy" \$995. Soundesign, Box 921, B.H., California 90213. 4-76-1t

GATES TRANSMITTERS: (2), HFL 20,000, Serial No. 75270, M-6534, frequency 3-28MC, carrier power 20,000 watts PLP, RF line input 50 ohms: 208 volts, 3Ph, 60 cycle input. Vacuum Tube Industries, Box 358, Canton, Mass. 02021, (617) 828-1650. 4-76-1t

NEW SPARTA 680 Exciter, list price \$2,350 - only \$1,800. Telephone (813) 391-9994 for details. 4-76-1t

CHANNEL 80 ANTENNA and 400' guyed tower. Exc. Cond. Will trade for? 312-357-1211. 4-76-3t

SPOT MASTER AUDIO CONSOLE. Never used. 5BES200 (5-mixer, stereophonic)—\$1700.00; ITA 5000-A-FM Transmitter (5KW). Solid State with AEL-2202 A-FM Exciter and AEL-2213 Stereo Generator, also Mosley 67KC Sub Carrier, including (2) Good 4CX 5000 A Tubes and (1) 4CX 250 Tube. Complete package—\$8300.00; Spot Master BETM200 Pre-amp (Used less than 40 hours)—\$45.00; UTC Plate Transformer CG310 (brand new)—\$385.00; Craig 4350 Scanning Monitor Receiver (new, with 5 crystals), \$210.00; (2) Shure Volcegates M625 (used less than 10 hours), \$60.00 each; (2) Gates 16" Turntables (good condition)—\$90.00 each; (2) Bogen MXM Mixers—\$40.00 each; (2) Rectilinear #12 Speaker—\$60.00 each; (2) Rectilinear Lowboys—\$100.00 each. All prices net. FOB Hempstead, NY. Telephone (516) 485-9200. 4-76-1t

SPECTRUM ANALYZER: HP8551B/HP851B. Excellent condition. Analyzer covers 10MHz to 43GHz. Recently calibrated and aligned. Complete with manuals—\$4900. Contact S. Koppelman; EMCEE, Box 116, White Haven, Pa. 18661; 717-443-9675. 4-76-1t

TELEVISION BROADCAST EQUIPMENT mounted in flexible bus: 3 Marconi Mark IV camera chains with associated equipment, sync generator (dual), MK4, cue and communication unit. Tektronix waveform monitor RM529. Conrac monitors: 14-inch, 4 CNA-8's; 9 lenses—1-3/8" to 12". Manuals for everything. With or without vehicle. Texas Electronics Exchange, 906 West Jefferson, Dallas, Texas 75208, (204) 942-2940. 4-76-1t

LOGGING SYSTEM, complete, English text with two teletypes, digital clock, encoder & decoder, prints hours, minutes, seconds and AM-PM. Nearly new \$4,800.00. Belar FM RF amplifier, new condition, \$275.00. Moseley RPL-2, \$475.00. Hewlett Packard Counter, Mod. 524, with time interval and 100 mc. plug in's, \$495.00. KSRN, Reno, Nevada 89501, 702-786-1045. 3-76-3t

EQUIPMENT FOR SALE (CONT.)

A FEW COMPETITIVELY PRICED used Revox A77 decks available. Completely reconditioned by Revox, virtually indistinguishable from new and have the standard Revox 90 day warranty for rebuilt machines. Satisfaction guaranteed. Example, A77 with Dolby, \$675, plus shipping. Write requirements to ESSi, Box 854, Hicksville, N.Y. 11802 (516) 921-2620. 10-75-6t

GATES EXECUTIVE, 10 channel simulcast solid state console, new stereo line amplifiers, \$2500; complete Marti M-3 Dual STL with transmitter remote control, turned to 943.15 mhz and 942.85 mhz, includes: antenna transmission line, spare tubes and crystals, \$2500; Spectraonics Compil-miter, \$275; Collins PB 150 Mono playback cartridge machine, \$150; Fairchild Conax FM limiter \$50; McMartin TBM-2000 FM SCA Monitor and relay receiver, \$100; Marti SCG-67 Sub Carrier Generator, \$75; 12" Microtrak tonearm, \$45; 4-72" Equipment racks, make offer. Call Ray Thomson, Chief Engineer, KDKB (602) 833-8888. 4-76-1t

SITUATION WANTED

ENGINEER-ANNOUNCER with First Phone, AM & FM combo experience, maintenance at directional AM. Technical school graduate, military electronics experience, CET. Seeking permanent employment in broadcast engineering or comboman position near central Indiana. Age 30. Send name and address with info on position. Kenneth R. Garvick, R.R. #1, Box 304-M, Pittsboro, Indiana 46167. 4-76-1t

HELP WANTED

TECHNICAL HELP—needed immediately, experienced engineers for TV remotes, Slo-Mo, VTR editing, Transmitter and ES operation. Send resume and salary requirements to P.O. Box 7817, Atlanta, Georgia 30309. 4-76-1t

ENGINEERS with first phone for southwestern VHF, studio and transmitter. Experienced or beginner, but must have equivalent of trade school or military training. Paid holidays, vacation, retirement plan and other benefits. Send brief resume with past earnings history and present salary requirements to Chief Engineer, KOAT-TV, P.O. Box 4156, Albuquerque, NM, 87106. 4-76-1t

TV SYSTEM ENGINEER WANTED. Graduate engineer, experienced in Microwave and CATV systems to work in system planning and installations for largest MDS operator. Approximately 25% travel. Contact Microband Corporation of America, 176 Broadway, New York, New York 10038. 4-76-2t

MOVE UP from your present job in broadcast engineering. We handle all engineering jobs and openings coast to coast. Send full resume confidentially now. The AMPS Agency, 6331 Hollywood Blvd., Suite 623, Los Angeles, Calif. 90028. Tel: (213) 462-7301. 8-73-1t

PART-TIME SUPERVISION: MATV installations your city. \$200.00 day possible. Melvin Cohen, 1620 N. Federal Highway, Boynton Beach, Fla. 33435. 4-76-9t

ELECTRONIC TECHNICIAN—operation and maintenance of Norelco, Ampex and CDL equipment preferable. Opening available immediately at full service Mid-west quad tape facility. Send resume and date available to: Dept. 350, Broadcast Engineering, 1014 Wyandotte St., Kansas City, Mo. 64105. 4-76-2t

MANAGEMENT ENGINEERING ASSISTANT to join staff of public television Engineering Department. Must have three to five years professional experience in engineering management position. Require excellent digital logic experience along with top technical skills and demonstrated administrative ability in union shop. Resumes only to Jay Rayvid, WQED-TV, 4802 Fifth Avenue, Pittsburgh, Pennsylvania 15213. WQED is an equal opportunity employer. 4-76-1t

HELP WANTED (CONT.)

ASSISTANT ENGINEER (COLLEGE INSTRUCTIONAL TV DEPT.). Full-time permanent non-exempt position. Experienced. Installs & repairs TV and other electronic equipment. Modifies custom made electronic equipment. 40-hour week. Ideal working conditions with loads of benefits. For interview (212) 969-8000, extension 373, St. John's University, Queens. 4-76-1t

TELEVISION CHIEF ENGINEER

—Responsible for designing, installing, and maintaining all UNI television facilities (including a recently completed color production/distribution system). Five or more years of closed circuit color experience, including switching, optical projecting, and helical VTR's. Position requires FCC first class Radio-Telephone License, completion of a two year technical school in electronics, and five years of television experience or any combination of related training and experience totaling seven years. Salary range is \$13,322 to \$16,308 depending on training and experience. All applicants must apply before May 3, 1976.

All interested applicants should apply directly to:

STAFF PERSONNEL OFFICE
UNIVERSITY OF NORTHERN IOWA
CEDAR FALLS, IA 50613

An Equal Opportunity/Affirmative Action Employer

Minorities may identify yourselves for purposes of Affirmative Action

The Good Neighbor is you.




Red Cross.

Belong.

Ad

A Public Service of This Magazine & The Advertising Council COUNCIL

How to select a ROUTING SWITCHER!...

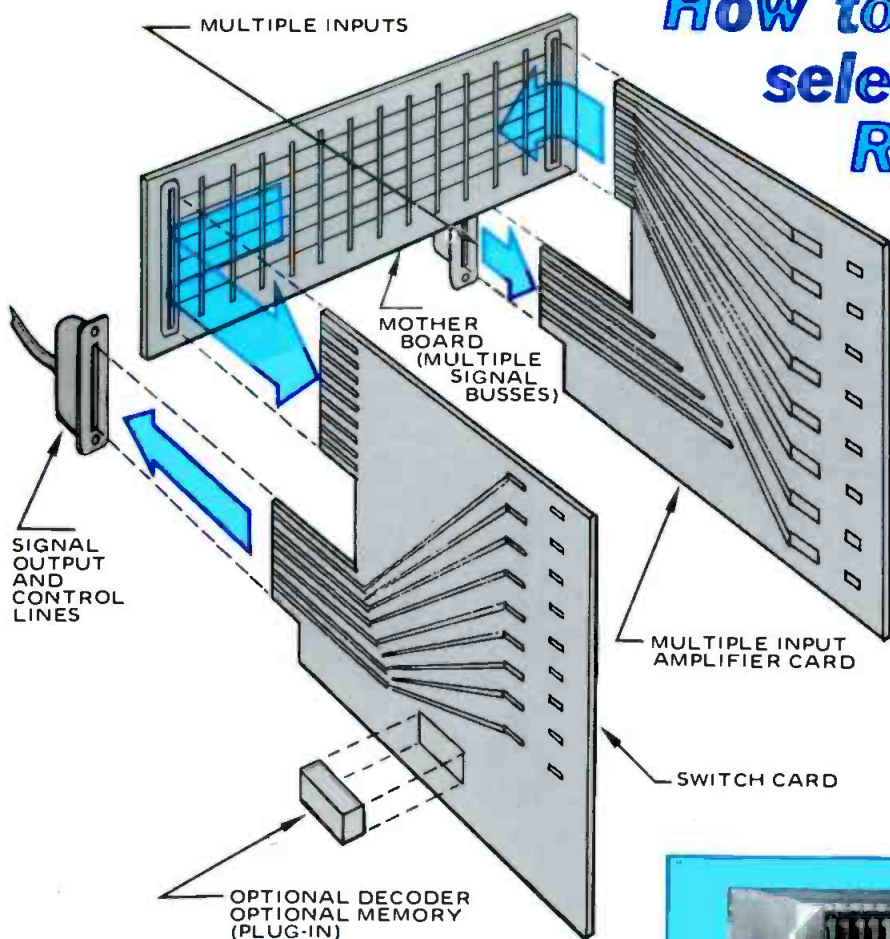


- Select for
PERFORMANCE
- Select for
COST EFFECTIVENESS
- Select for
RELIABILITY
- Select for
EXPANDABILITY
- Select for
RELIABLE SOURCE

Select DYNAIR





SERIES 8100 AUDIO SWITCHER

Frequency Response ± 0.15 dB (20 Hz to 20 kHz) — Harmonic Distortion less than 0.15% — Hum and Noise 85 dB below maximum output — Crosstalk better than 70 dB

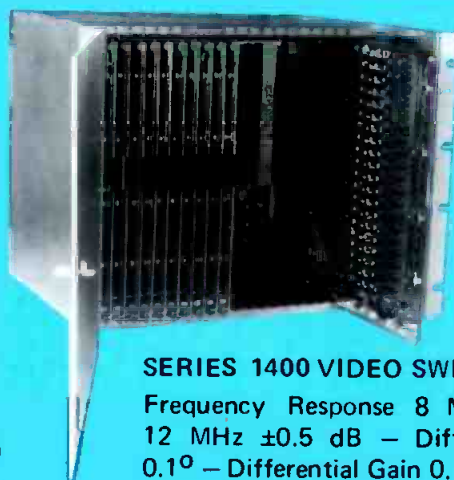

SERIES 1400 VIDEO SWITCHER

Frequency Response 8 MHz ± 0.1 dB, 12 MHz ± 0.5 dB — Differential Phase 0.1° — Differential Gain 0.1% — Crosstalk better than 60 dB

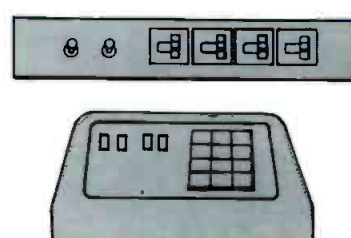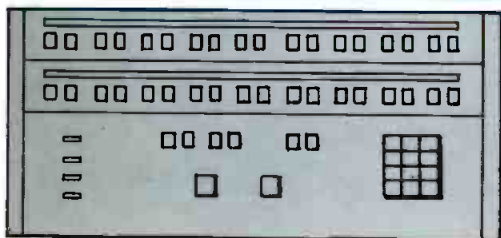


Pushbuttons to computers control our switches. Specify from an inventory of standard controls, describe your desired control, or invent your own. Our crosspoints are addressed discretely or with BCD so flexibility comes naturally. **DO IT YOUR WAY!**

DYNAIR ELECTRONICS, INC.

6360 FEDERAL BLVD., SAN DIEGO, CA. 92114
PHONE: (714) 582-9211; TWX: (910) 335-2040



For More Details Circle (2) on Reply Card

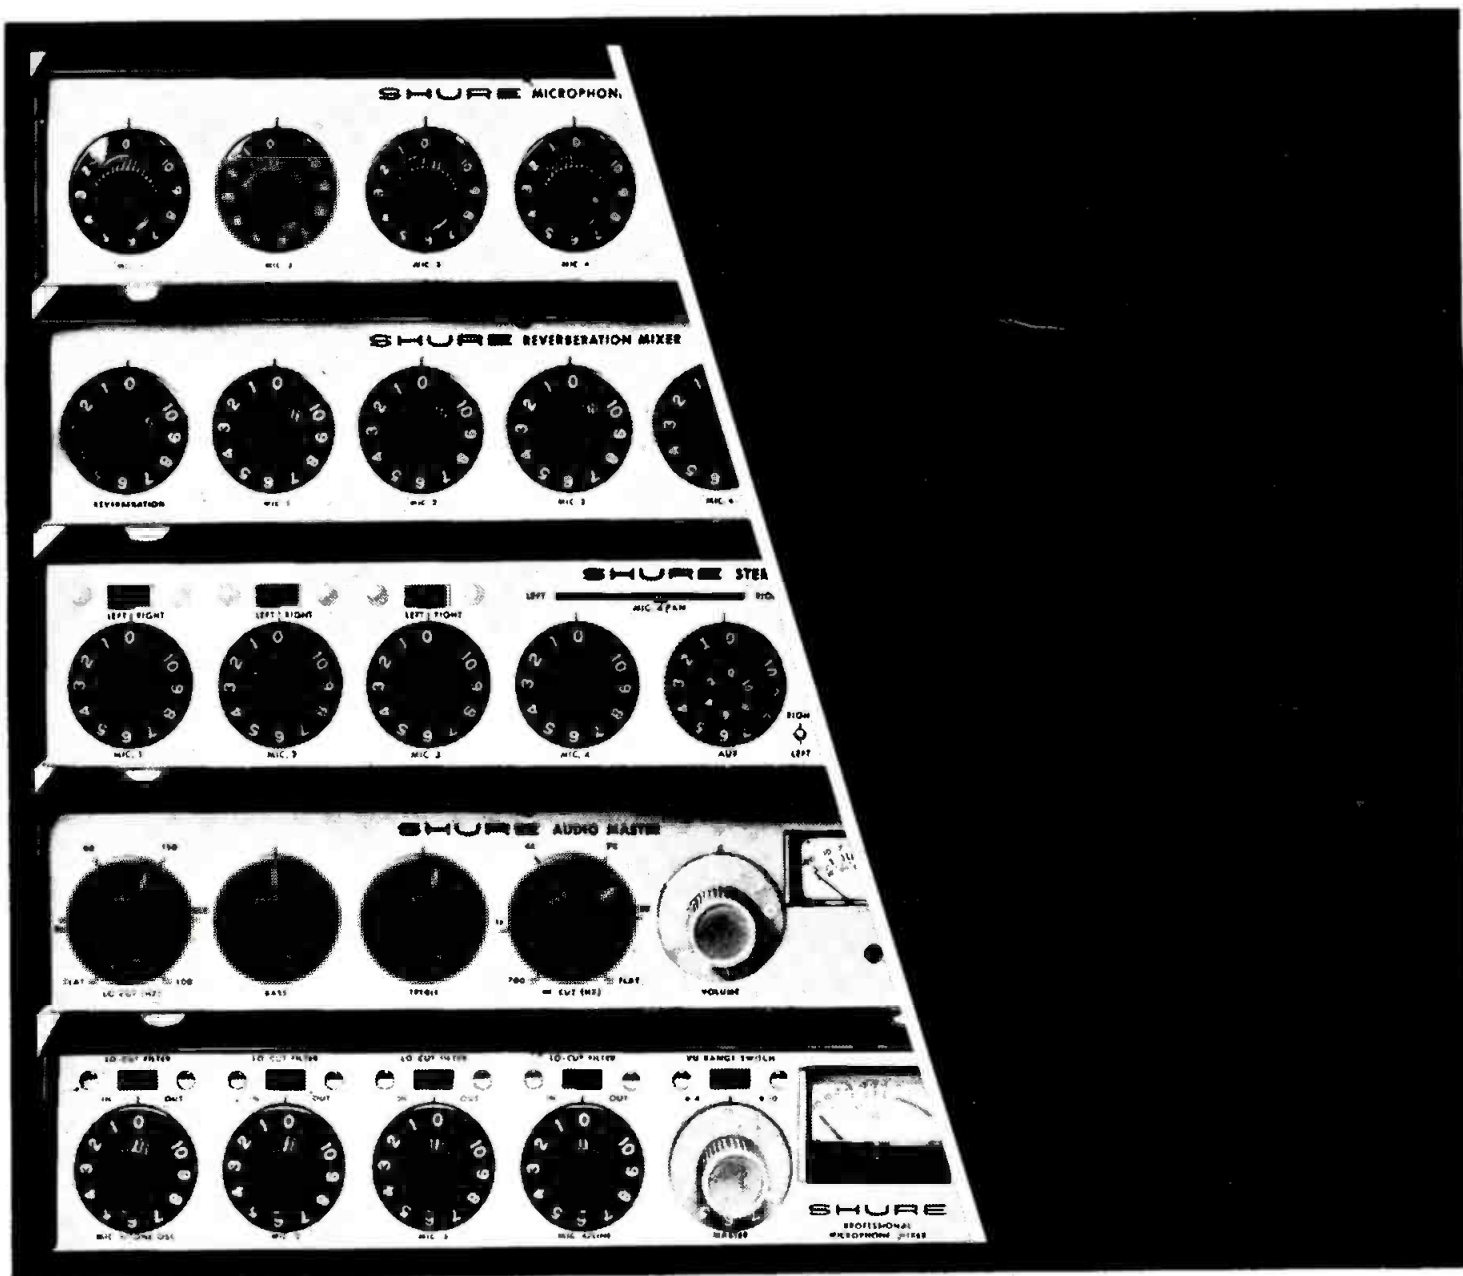

Rack 'em up.



For studio, broadcasting, recording, or public-address, Shure audio control components offer more features and more performance, dollar for dollar, than similar equipment. And—just as important—Shure audio components are easier to work with. Their compact size and versatility equip them for an extremely wide variety of audio control applications—and built-in input-output flexibility means quick set-up anywhere. For a permanent installation or a component system that can be adapted to meet any need, Shure has the right combination. To obtain a copy of the Shure catalog, see your dealer or write:

Shure Brothers Inc.
222 Hartrey Ave., Evanston, IL 60204
In Canada: A. C. Simmonds & Sons Limited



Manufacturers of high fidelity components, microphones, sound systems and related circuitry.

For More Details Circle (3) on Reply Card