# BROADCAST. July 1986/\$3

A08002----HOVPL0380 XXXXX BE
F10519862082685 30A 001

BE
OLH- TV PROD
38 PLYMOUTH DR
CHERRY HILL
NJ 08034

Maintaining video quality


Folded unipole AM antenna

www.americanradiohistory.com

# SUPERSTATION, AFFILIATE OR INDEPENDENT... ADM MAKES YOUR CHANGE TO STEREO EASY

When you're making the transition to stereo TV, make the move to ADM. In addition to stereo, you can have the traditional ease of operation, reliability and quality available only with ADM consoles.

ADM's top of the line BCS has proven to be a best seller at major networks, affiliates and independents. The console features input pre-selection and bussing, dual cue, group mute and Slidex. VCA control of all main program paths provide superior stereo tracking... making ADM your logical choice.

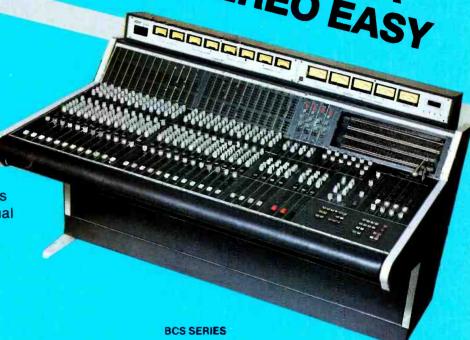

For any broadcaster who needs ADM quality at a price that will be gentle on your equipment budget, the S/TV fills the bill.

With the ADM five year warranty on parts and labor you can buy it and forget it. It will handle your stereo needs now and in the future. Call us, we like to make life easier for our friends.





1626 E. Big Beaver Road, Troy, Michigan 48084

Phone: (313) 524-2100 • TLX 23-1114

Circle (1) on Reply Card

www.americanradiohistory.com

# The Midwest Edge

**Advanced Satellite News Vehicles** from The Leader in Mobile Television Communications

From 4-wheel-drive ENG units to 45-foot mobile production vans - Midwest has built more broadcast vehicles than anyone. And as a leader in the RF industry, we've supplied hundreds of satellite systems across the country. Midwest is using this experience to produce the most efficient, versatile Satellite News Vehicles available. All engineering and construction are done under one roof, allowing the fastest delivery in the industry. And with over 30 offices, Midwest has the most complete service network offered by any Satellite News Vehicle supplier.

The S-25 is equipped to handle any situation, with onboard power, editing and microwave communications capabilities. The 2.4M antenna's deployment system is in full compliance with the latest FCC radiation regulations. And the unique antenna stowage system virtually eliminates snow and ice accumulation. The SCR-25 communications package, developed by Midwest, utilizes Bandedge digital carriers which allows encrypted communications between a remote or base station and the ability to access any satellite, any transponder, any frequency. Stay on the leading edge of competition, with a Satellite News Vehicle from the leader in broadcast communications - Midwest.






S INTHEREN





Contact Midwest for information on our complete line of Satellite News Vehicles



Dayton, OH 513-435-3246 Indianapolis, IN 317-872-2327 Cleveland OH 216-447-9745 Detroit, MI 313-689-9730

Nashville, TN 615-255-2801 Louisville, KY 502-491-2888

Lexington, KY 606-277-4994

Charleston, WV 304-768-1252

615-687-9515 Bristol, TN 615-968-2289

Atlanta, GA 404-875-3753 Virginia Beach, VA 804-464-6256

Baltimore, MD 301-665-9323

Miami, FL 305-592-5355

Washington, D.C. 301-577-4903

Tampa, FL 813-B85-9308


Orlando, FL 305-398-1885 New Orleans, LA 504-542-5040

Communications Corp.


One Sperti Drive Edgewood, KY 41017 800-543-1584 (in KY 606-331-8990) Circle (3) on Reply Card

# **Contents**

July 1986 Volume 28 Number 7



Page 22

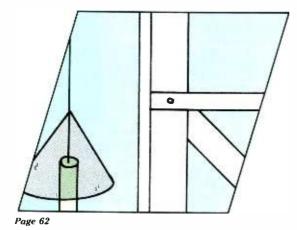

Page 74

# BROADCA

### VIDEO EMPHASIS ISSUE:

The requirements placed upon engineers and technical managers at video production and TV broadcast facilities are continually increasing. Tough competition and an everwidening choice of program sources mandate that every program segment-down to 10-second promos-must be of top technical quality. This month, we discuss how to do just that.

# Video Waveform Monitoring

By Margaret Feisel, Tektronix

Since their introduction nearly 20 years ago, waveform and vector monitors have become an essential part of every TV production or transmission facility. This article provides a comprehensive summary of how to read the displays and what they mean.

### **36** Sync Processing and Distribution

By Michael Guess, Grass Valley Group In order for a video plant to operate reliably, the timing of synchronization signals must be properly matched. The author examines how to accomplish this task.

# Understanding SC/H Phase

By David Jurgensen, Magni Systems

When an edit or video switch is made, there is usually a 50-50 chance that the subcarriers of the video signals will be truly in phase, unless the video system has been properly SC/H phased. This article discusses the need for proper SC/H phasing and how it can be achieved.

# The Folded Unipole Antenna

By John H. Mullaney, Mullaney Engineering The design and application of the folded unipole antenna for AM broadcasting.

# Integrating AM and FM Antenna Systems

By Lewis M. Owens, Radio Engineering Services How to design an AM directional array incorporating a tall tower for FM broadcasting.

# Special Report: Directions in Video Editing

By Steve Smith, Ampex

A look at the relative merits and applications of linear vs. random access editing.

### ON THE COVER

Building toward improved video signal quality requires a knowledge of the waveforms and test instruments of television. ()ur cover illustrates waveform and vector displays of the SMPTE color-bar test pattern, in addition to SMPTE bars as a video component signal. The use of video test instruments to monitor and measure stereo audio also is illustrated. (Photo courtesy of Tektronix.)

### **DEPARTMENTS**

- News
- Editorial
- FCC Update 8
- 10 Strictly TV
- 12 re: Radio
- Satellite Technology Circuits
- 18 Troubleshooting
- 20 Management for Engineers
- 84 Field Report: Modulation Sciences Sidekick
- Field Report: Gentner SPH-4 94
- 108 Station-to-Station
- 120 SBE Update
- 121 People
- 122 Business New Products 124

14

# HITACHI INVENTS THE FIRST I'VTR THAT WATCHES ITSELF SO YOU DON'T HAVE TO.

The revolutionary Hitachi HR-230 1" VTR has the most advanced real-time, self-diagnostic capabilities ever perfected.

In either the record or playback mode, a computer inside the HR-230 monitors 49 different performance parameters second by second. And then stores this information within the memory for recall at a later time—not just with numbers and symbols, but in words.

This means no more errors slip by when your operator is not there. And there's no more need for hit-or-miss spot checking.

The Hitachi HR-230 has a unique quick-threading tape path, incorporating retracting entrance and exit guides, main erase head, as well as a scanner air system that protects tapes.

It recues a 30-second segment in 3.5 seconds. It has a

fast/slow motion range that provides real-time reverse and field/frame still motion. Plus programmable time compression up to 20%, with 0.1% accuracy.

A unique, concealed foldout control panel groups editing functions and separates edit controls from the main control panel.

In short, it's the ultimate 1" for networks, affiliates or teleproduction companies. Don't consider your next 1" purchase without looking into

it. Ccntact Hitachi Denshi America, Ltd., Broadcast and Professional Division, 175 Crossways Park West, Woodbury, NY 11797. (516) 921-7200 or (800) 645-7510. Hitachi Denshi, Ltd. (Canada), 65 Melford Drive, Scarborough, Ontario M1B 2G6. (416) 299-5900.



**@** Hitachi

Circle (4) on Reply Card

www.americanradiohistory.com



# Legal group studies standards procedures

The SMPTE Presidential Advisory Council, established in 1985 under the auspices of Harold J. Eady, SMPTE president, has cited the efforts of a task force formed to study and analyze the society's standards procedures.

The task force is an initial step in achieving more timely domestic and international industry standards. It is composed of legal representatives from the manufacturing and broadcasting companies that comprise the council. The force's prime purpose is to determine if there are more expedient methods available to SMPTE engineering technology committees for developing standards. It will also discuss how SMPTE could enhance its role in the motion picture and TV industries.

The first meeting was held in New York on March 18. It was held at the offices of Wencer, Murase and White, the legal counsel for SMPTE, and acquainted council legal representatives with the standards procedures of the society's engineering technology committees.

At an April 12 meeting in Dallas, issues discussed included the society's respon-

sibility to the CCIR; the need for a composite digital video standard; and forming groups to study digital small-format recording and cart machines.

# SMPTE conference sessions in the making

Jack Spring of Eastman Kodak has been appointed program chairman for the 128th technical conference and equipment exhibit of the Society of Motion Picture and Television Engineers (SMPTE). The conference and exhibit will be held Oct. 24-29, at the Jacob K. Javits Convention Center in New York.

Francis J. Haney of ABC-TV is program vice chairman. Grant P. Ireland, Allied Film & Video, and Michael T. Fisher, ABC-TV, are the topic chairmen. Ireland and Fisher will be responsible for the solicitation of technical papers within the categories of film and television, respectively.

The theme for the conference is Too ay's Technology—Tomorrow's Reality? Topic sessions are being formed and the committee is arranging a session on high-definition television. A session devoted to archiving also is planned. This session would consider some of the

restoration work undertaken by individuals, institutions and corporations.

# CCIR postpones HDTV standard action

At its 16th plenary assembly in Dubrovnik, Yugoslavia, the International Radio Consultative Committee (CCIR) postponed action on a proposed 1,125 line/60Hz single worldwide HDTV studio standard. The proposal was supported by the United States, Canada and Japan. The 1,125/60 standard has, however, been incorporated into CCIR's report on HDTV, making it the only recognized parameter.

The CCIR is a body of the International Telecommunications Union (ITU), an organization affiliated with the United Nations. During its second session on HDTV, the CCIR approved the report of an ad hoc HDTV group. This approval included three significant steps toward HDTV standardization.

First, the 1,125/60 proposal was confirmed, making it an annex to report 801, the CCIR's only report on HDTV.

Second, the marketplace acceptance of HDTV systems based on the 1,125/60

Continued on page 121

# **BROADCAST**engineering

Editorial and advertising correspondence should be addressed to: P.O. Box 12901, Overland Park, KS 66212-9981 (a suburb of Kansas City, MO); (913) 888-4664. Telex: 42-4156 Intertec OLPK. Circulation correspondence should be sent to the above address, under P.O. Box 12937.

### **EDITORIAL**

Jerry Whitaker, Editor
Carl Bentz, TV Technical Editor
Brad Dick, Radio Technical Editor
Dan Torchia, Group Managing Editor
Paula Janicke, Associate Editor
Dawn Hightower. Associate Editor
Pat Blanton, Directory Editor

### ART

Todd Meyers. Graphic Designer

### **EDITORIAL CONSULTANTS**

Fred Ampel, Audio Miguel Chivite, International Nils Conrad Persson, Electronics Tom Cook, Video Mel Lambert, Professional Audio

### BUSINESS

Cameron Bishop. Group Vice President
Duane N. Hefner. Publisher
Stephanie Fagan. Promotions Manager
Cynthia Sedler. Marketing Coordinator
Dee Unger. Advertising Supervisor
Mary Birnbaum, Advertising Coordinator

Advertising sales offices listed in classified section.

# **ADMINISTRATION**

R. J. Hancock, President John C. Arnst, Circulation Director JoAnn DeSmet, Circulation Manager Kevin Callahan, Art Director Dee Manies. Reader Correspondent

# TECHNICAL CONSULTANTS

Eric Neil Angevine, Broadcast Acoustics
John H. Battison, Antennas/Radiation
Blair Benson, TV Technology
Dennis Ciapura, Radio Technology
Dane E. Ericksen, Systems Design
Howard T. Head, FCC Rules
Wallace Johnson, FCC/Bdct. Engineering
John Kean, Subcarrier Technology
Donald L. Markley, Transmission Facilities
Harry C. Martin, Legal
Robert J. Nissen, Studio/Communications
Hugh R. Paul, International Engineering
Art Schneider, A.C.E., Post-production
Elmer Smalling III. Cable/Satellite Systems
Vincent Wasilewski, Communications Law

### **MEMBER ORGANIZATIONS**

Acoustical Society of America Society of Broadcast Engineers

Member, Association of Business Publishers Member, Business Publications Audit of Circulation



BROADCAST ENGINEERING is edited for corporate management, engineers/technicians and other station management personnel at commercial and educational radio and TV stations, teleproduction studios, recording studios, CATV and CCTV facilities and government agencies. Qualified persons include consulting engineers and dealer/distributors of broadcast equipment.


SUBSCRIPTIONS: BROADCAST ENGINEERING is mailed free to qualified persons within the United States and Canada in occupations described above. Non-qualified persons may subscribe at the following rates: United States and Canada; one year, \$25.00. Qualified and non-qualified persons in all other countries; one-year, \$30.00 (surface mail); \$108.00 (air mail). Back issue rates, \$5, except for the Buyers' Guide/Spec Book, which is \$20. Rates include postage. Adjustments necessitated by subscription termination at single copy rate. Allow 6-8 weeks for new subscriptions or for change of address. Second class postage paid at Shawnee Mission, KS.

BROADCAST ENGINEERING, Volume 28, No. 7 (USPS 338-130) is published monthly (except in the fall, when two issues are published) by Intertec Publishing Corporation, 9221 Quivira Road, P.O. Box 12901, Overland Park, KS 66212. Second Class Postage paid at Shawnee Mission, KS and additional mailing offices. POSTMASTER: Send address changes to BROADCAST ENGINEERING, P.O. Box 12983, Overland Park, KS 66212.

Photocopy rights: Permission to ohotocopy for internal or personal use is granted by Intertee Publishing Corporation for libraries and others registered with Copyright Clearance Center (CCC), provided the base fee of \$2.00 per copy of article is paid directly to CCC, 21 Congress St., Salem, MA 01970. Special requests should be addressed to Cameron Bishop, group vice president. ISSN 0007-1794-\$2.00 + \$0.00.

©1986. All rights reserved

• INTERTEC

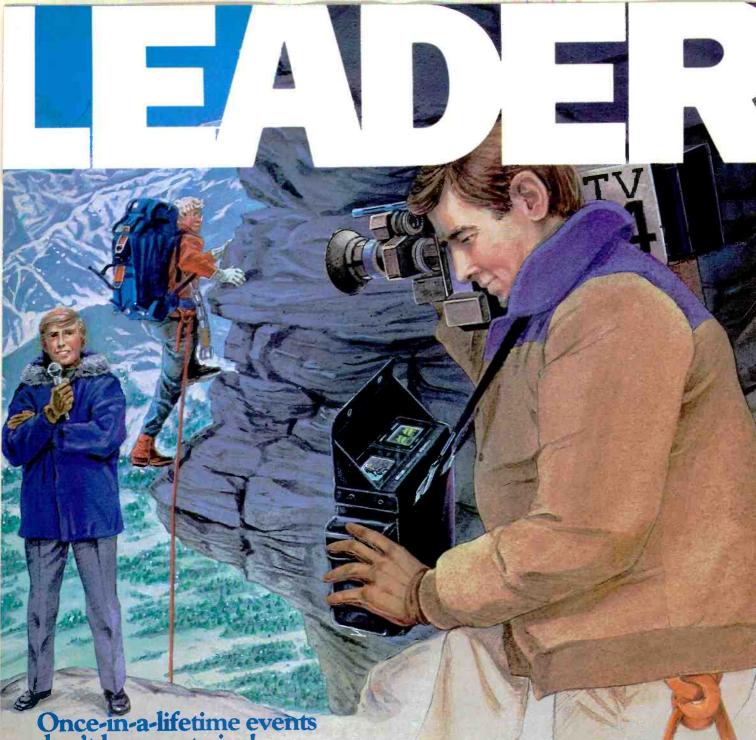

Once-in-a-lifetime events don't happen twice!

This 8-lb EFP/ENG Monitor confirms your field productions are perfect, first time, every time!

The LVM-5863A Color/ Audio/Waveform Monitor confidence tests camera and VCR performance anywhere. Shows you the overall production quality immediately...with full color (NTSC) and sound. LVM-5863A lets you be

sure all your productions are technically and artistically correct before you leave the location. The LVM-5863A confirms white balance sync and burst levels. Its 2H and 2V waveforms show both line and field rate signals. A switchable IRE filter makes it easy to check peak video. And for

accurate verification of setup and black balance, switch on the 4x magnifier. With all this, the LVM-5863A is easy to use since controls are kept to a minimum.

# It goes anywhere.

Lightweight and small, the LVM-5863A is easy to hand carry or to mount in trucks, vans or helicopters. Requiring only 12 Vdc, it can use a readily available, self-contained battery (Sony NP-1 or equivalent) or

external power sources such as vehicles and EFP battery belts.

# Quickly pays for itself.

The LVM-5863A eliminates the risk of time-wasting, cost-increasing, missed or poor-quality shots.

For product information Circle 6 on Reply Card

(800) 645-5104

In NY State (516) 231-6900

latest Test Instrument Catalog with over

Request an evaluation sample, our

100 outstanding products, the name and address of your nearest "Select" Leader Distributor, or additional information. For professionals difference.

380 Oser Avenue, Hauppauge, New York 11788 Regional Offices: Chicago, Dallas, Los Angeles, Boston, Atlanta In Canada call Omnitronix Ltd. (514) 337-9500

For product demonstration Circle 5 on Reply Card

LVM-5863A

# Editorial |

# Politics 1, Technology O

 ${f A}$ sk a given number of people for a solution to a problem and you will probably get as many different answers, ranging from the practical to pie-in-the-sky schemes. That's what happened when the question of quadraphonic FM was posed, and the HDTV question seems to have met the same fate.

Thirteen years worth of research and discussion evolved into the proposed HDTV production system that went to the CCIR plenary session in May. Smooth sailing had been predicted for the plan as late as October 1985.

Then suddenly, in 11th-hour dissension, yea votes became nays, as talks moved from engineering circles to economically and politically oriented meetings. Even before HDTV was tabled at the CCIR session, a new study group was organized for further investigation of HDTV as a system from production to reception. A new timetable notes 1988 as the tentative deadline for new or revised proposals for improved TV imaging for the world.

Will the 1,125/60 HDTV system remain tabled until 1988? Or will predictions made by speakers at the 1985 international conference in Montreux, Switzerland, come true? Those predictions were that various systems of limited or no compatibility would be developed and used. The overall result would be a situation that might be even more complex than our tripartite world of NTSC, PAL and SECAM.

Can politics and economics control what is touted as the biggest thing in television since color? Apparently yes, but there are several other factors that require consideration

The desire for a worldwide system of improved imaging has been stated as a major goal in picking an HDTV standard. Indeed, the CCIR study group is mandated to find solutions to concerns about the 1,125/60 NHK system. Even the Japanese have agreed to reconsider that system in light of European objections to the 60Hz-based approach. Nonetheless, the possibility of one standard diminishes as time passes.

Such analysis is no doubt a good idea. But what of those companies that have made sizable investments in research? With a marketable product now in existence, can those companies afford to sit back and wait? From that premise, the need for compatibility rests not with today's TV systems, but with the existing 1,125/60 equipment that will be in use in two years.

National economies must be protected. If a new technology should come from another country, then either licensing fees must be paid to the originating country (or its companies) or the equipment must be imported. If consumers consider the new technology as must-have, one method of import control is through high duties. That will mean consumers will pay exorbitant prices to purchase an HDTV receiver.

National pride also must be considered. How can a country be proud if the research and design teams of its TV equipment manufacturers succumb to designs from another country? Political ideology is inextricably linked to the outcome of this international quandary.


With these factors established at the start, the new study group can expect a difficult task in finding a universal HDTV format. It must satisfy users of both 50-field and 60-field systems and ideally offer some compatibility with current NTSC, PAL and SECAM equipment. The format should meet certain requirements desired by the film community, particularly in the area of gamma transfer characteristics.

Frequency allocations for eventual transmission of HDTV programming present additional problems. In the United States, a move is afoot to reassign some unused UHF TV channels to 2-way land mobile and cellular radio communications. Those channels could conceivably provide a terrestrial wideband transmission channel for HDTV. Satellite channels are no less in demand and may become even more sought after because of failures in the U.S. and European space agencies' programs.

In light of all the problems facing HDTV standards work, do we really need it? There is no general public outcry for the service. In fact, it would appear that only a limited portion of the broadcast industry is deeply concerned. Perhaps the best idea is, for now, to simply write off over-the-air HDTV as a clever, but impractical concept. Let it join quadraphonic sound, which died from indecision, and AM and TV stereo, now both shrouded in legal controversy.

Let's work instead to glean the maximum quality from current TV broadcast signals. Then, someday, it just may be possible to find a system that will be acceptable to the world. Then again, maybe not. But meanwhile, we will have enjoyed the fruits of our efforts with today's working systems. 1:(:\(\))))]

# STUDIOS • POST PRODUCTION • MOBILE UNITS MASTER CONTROL • MICROWAVE • FIBER OPTICS

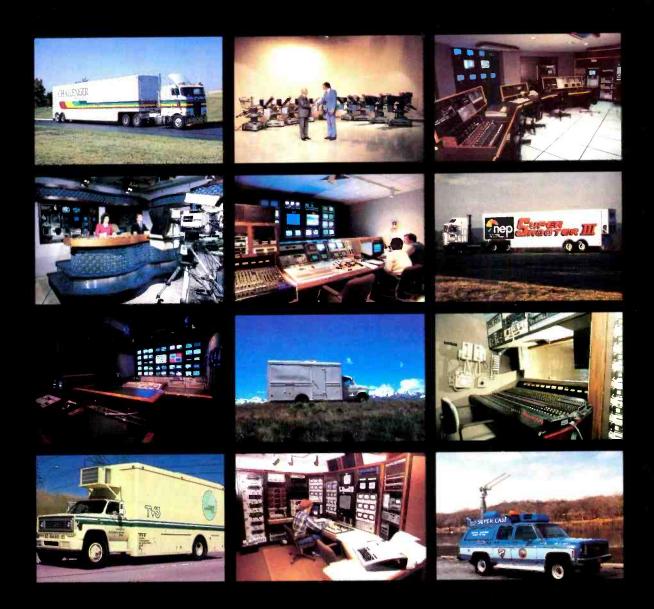

If your future plans include an individual component, a turnkey system, or something in between, we can develop your ideas into a complete television facility.

# LERRO

3125 N. Broad St., Philadelphia, Pa. 19132 215 - 223-8200 Contact Bob McTamney

www.americanradiohistory.com

# FCC update

# FCC modifies quarterly list requirements

By Harry C. Martin

The FCC has changed its recordkeeping requirements regarding issueresponsive programming.

Under the revised rule, licensees are required to list, on a quarterly basis, the programs that have provided the station's most significant treatment of community issues in the preceding three months. Previously, quarterly program listings had to include five to 10 of the most significant community problems and a listing of illustrative responsive programming.

The basic differences between the old and the new standards are that a list of issue-oriented programs that are illustrative, without regard to significance, will no longer suffice; and that the requirement that a minimum of five to 10 issues be listed has been eliminated.

However, the commission noted that licensees whose quarterly listings of issue-responsive programming include significant programming directed to five to 10 community issues would likely be able to demonstrate compliance with FCC public service standards.

This rule change was made in response to a directive from the U.S. Court of Appeals for the District of Columbia Circuit in connection with the court's review of radio deregulation. The rule was made applicable to television for consistency. The first listing subject to the new standard was due to be placed in the public file on or before July 10.

# Review of FM technical rules terminated

The FCC has terminated its review of FM technical and operational rules by eliminating the following rules that it considered unduly burdensome or inhibiting:

- •FM stereophonic sound transmission quality standards;
- •standards that limit development of new methods of FM stereophonic transmission;
- •standards regarding FM main-channel signal degradation caused by SCAs;
- •FM transmission system safety requirements and electrical properties requirements; and
- •non-commercial educational FM regula-



tions that were duplicated elsewhere in the rules.

This deregulation became effective June 9.

### First come, first served

The commission has changed its processing standards for commercial FM applications in one important respect. This change, made effective in late May, applies to situations in which all of the applications filed within a window filing period are rejected for technical defects.

Under the previous procedure, the first acceptable application filed after a mass rejection would receive the grant. Under the new procedure, the commission will specify a future date—seven days from the release of a public notice—on which new applications may be filed on a first come, first served basis. No new applications will be accepted for tender before the release of this public notice. Applications received between the date of release of the public notice and the seventh day thereafter will be treated as if received on the seventh day.

This procedural change was made to ensure fairness to all potential applicants. Previously, applicants had to be prepared to refile on a moment's notice in order to have a chance to compete.

# EEO rules not applicable to broadcast networks

The commission has refused to extend its Equal Employment Opportunity rules to broadcast networks and multipleowner headquarters.

The ruling arose in connection with denial of a petition for reconsideration filed by the National Black Media Coalition. In November, when the commission decided to open a rulemaking for revision of its EEO rules, it denied the NBMC's original request to extend the reach of the EEO rules to networks and headquarters.

At that time, the agency said it would consider NBMC's proposal in the context of its broader rulemaking. In seeking reconsideration, NBMC argued that the issues being studied by the FCC in the rulemaking do not relate to networks

and headquarters operations. The commission disagreed, saying it would take up the matter once the nature and scope of broadcast licensees' basic EEO obligations have been determined.

### Recent forfeiture actions

The commission has issued a notice of apparent liability for a forfeiture of \$10,000 to an Oregon FM station for violation of the main studio rule and another rule that requires local program originations.

In another forfeiture action, a Colorado station faces a \$3,100 fine for failing to fence in its antenna tower, install an operable EBS receiver and generator, conduct weekly EBS tests, cease using remote control within three hours after a malfunction, have a licensed operator on duty, and have an issues-programs list in its public inspection file.

In spite of ongoing deregulation, the FCC continues to vigorously enforce rules that still are on the books.

# Clarification of report on remote control

In April's "FCC Update" it was reported that remote-control operations using a telephone-controlled ATS system would violate FCC rules if the system lacks a fail-safe mechanism that can detect the failure of the telephone line to the transmitter necessary to terminate operations. This statement may be misleading. The FCC does not require that ATS systems have such a fail-safe mechanism in situations in which the licensee maintains a separate, redundant circuit by which transmitter operations can be terminated.

# **Duplication deleted**

In late March, the FCC deleted section 73.242 of the rules limiting duplication of programming on AM and FM stations that are co-owned in the same market.

The rule provided that for either station of an AM/FM combination licensed to a community of more than 25,000, the FM could not devote more than 25% of the average program week to duplicate programming. The commission's deregulation in this area is designed to foster expanded hours of operation and to give full discretion to AM/FM owners with regard to program duplication.

Martin is a partner with the legal firm of Reddy, Begley & Martin, Washington, DC.

# One touch and you'll know it's Grass Valley Group.



The solid Grass Valley Group touch. The exceptional Grass Valley Group service. The reliability only Grass Valley Group can offer. We call it the Horizon Routing System. You'll just call it terrific.

Grass Valley Group®

A TEKTRONIX COMPANY

# Strictly TV

# HDTV: what it means

By Ben Crutchfield

An interesting question faces the TV broadcast industry today. What, if anything, should be done about high-definition television? We have lived with the NTSC color system for 30 years, and it almost seems to be a law of nature. We have improved the system from camera to receiver gradually over the years, so that the pictures we deliver today are vastly better than those of 20 or even 10 years ago.

Critics, particularly European critics, used to refer to NTSC as never twice the same color. Now they are trying to defend systems that have no significant advantages as well as the disadvantage of 50Hz flicker.

# New TV system considerations

Meanwhile, improvements to NTSC continue. Sophisticated filters and digital processing at both the transmitting and receiving ends improve the quality of the pictures. Add multichannel sound and it is hard to imagine how things could be any better, until you see HDTV.

A design objective for the 1,125-line HDTV system was to be as good as high-quality 35mm film. There may be technical debates as to whether that objective has been met or exceeded, but subjectively, most people, including video engineers, agree that HDTV looks better. HDTV has the 3-dimensional quality of 35mm film without grain.

Of several systems in various stages of development, the most highly developed is the product of 15 years of work in the laboratories of the Japanese Broadcasting Network (NHK). The system uses 1,125 scanning lines, with a 60Hz field rate and 2:1 interlace. The picture has a 3x5.3 (or 9x16) aspect ratio. Luminance bandwidth is 20MHz, while two color component signals use another 10MHz. Color information, kept separate from luminance, avoids the NTSC crosstalk.

# New TV studio concept

This system has been proposed as a world standard for video production. Note that this is proposed as a *production standard*. So far no one has suggested distributing 30MHz signals by any current means.

Interest in HDTV is growing among production people as a possible alternative to film as the production medium. There is no processing, allowing viewing

Crutchfield is project director for Advanced TV Terrestrial Broadcast Products, a joint project of the NAB and Association of Maximum Service Telecasters.



and editing of the tape to proceed almost as soon as a scene is shot. A wide range of special effects can be set up quickly, because there is no need to print and process film, including intermediate stages such as the *traveling matte*. When completed, the program would, for the foreseeable future, be converted to film or NTSC tape for distribution.

## **Exploring definition**

In broadcast, however, what can we do with a program source for which the video alone takes up five times the bandwidth of our current channel allocations? The answer lies in bandwidth compression techniques. It seems that although the wide bandwidth of information is needed to produce a finished HDTV program, the viewer does not need as much data to see an HDTV picture.

The human eye and brain constitute a sophisticated system for processing information. Various subsystems process different stimuli in different ways and at different rates. Researchers have studied reactions to motion, color, brightness, lines and edges.

How the eye reacts to motion is one of the easier concepts to understand. Basically, the eye is less sensitive to the detail of a moving object. The immediate implication of this is that we do not need to transmit as much information about a part of a picture that is moving, relative to the rest of the picture. In a shot of a person running, with the camera head locked, the eye would be satisfied with less detail of the person than of the scenery. Because the scenery would change little, we do not need to retransmit all of the background information in every frame.

In fact, most information in television or motion pictures changes very little from frame to frame. Exceptions are *cut* transitions, but the eye takes longer than one frame to adjust to the new picture, reducing the need to transmit a full high-definition first frame after the cut. In experiments with transmissions of *changing information only*, pictures have been produced with some motion using the bandwidth of an audio signal.

On a practical level, several systems offer the possibility of broadcasting HDTV. At present none are completely compatible with NTSC and none are within 6MHz, nor does it appear likely that a means exists to transmit HDTV quality within the NTSC 6MHz boundaries. One culprit is the method in which color was added in the 1950s. We are, it seems, approaching the limits of improvements to the existing system.

Impressive evidence shows that an HDTV signal can be transmitted within as little as 8MHz to 12MHz, by taking advantage of what is known about eye and brain information-processing methods. Development and implementation of such a system would mean that our existing, terrestrial broadcast system could take advantage of the major improvement offered by HDTV and maintain technical competitiveness with the other mediums that are not bandwidth restricted.

### Demos verify theories

Demonstrating the feasibility of such systems is a top priority of the NAB and the Association of Maximum Service Telecasters (MST). This demonstration is important for two reasons.

First, for many broadcasters, advanced TV systems are still laboratory curiosities. People need to know more about these systems, particularly regarding their potential use by broadcasters and by competing media.


Second, it is essential that Congress and the FCC be persuaded not to preclude, through changes in UHF spectrum allocations, the broadcast delivery of advanced television. This is an urgent matter, because the FCC is currently considering a major proposal to allow land mobile services to share parts of the UHF TV spectrum.

NAB and MST are preparing a series of demonstration broadcasts for the Washington, DC, area and, possibly, for other cities. The first system to be demonstrated will be MUSE, developed by NHK. NHK has conducted a broadcast test of this system in Japan using FM, but the test being planned will use vestigial sideband AM to conserve spectrum. NHK is supporting the project with equipment and engineering expertise. In addition, other manufacturers have offered cameras and recorders.

What is MUSE? The acronym stands for multiple sub-Nyquist sampling encoding. The system transmits 1,125-line HDTV in only 8.1MHz.

# FIELD PRODUCTION

# A special job demanding specialized products.

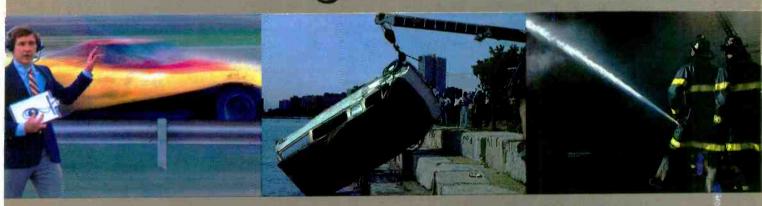

# For your audio needs: a growing line of compact, easy-to-use FP amps and mixers.

Shure FP products are built specifically for ENG. EFP, film, and video work. They're not general audio products that "might" work on remotes. And no one offers as wide a selection with this kind of built-in ruggedness and reliability.



For Stereo Remotes. The FP32 Stereo Mixer is comparable in sign and features to our famous FP31. Its stereo capability, light weight, easy-to-use controls and convenient shoulder harness make it the first choice of field crews. Our FP42 Stereo Mixer simplifies mic cueing, so important in situations like sports remotes. Plus it enables

you to easily mix down stereo in your post production booth. It offers all the features of the popular M267 plus stereo capability and a stereo headphone amp.



The Industry Standards. The FP31 is Shure's original field production mixer. Thousands bet their audio on it worldwide. The FP16, a one-by-six distribution amp with transformer balancing and link jacks, outperforms all competition. It's also ideal as a portable press bridge.



For Long Yardage Situations. The FP11 Mic-to-Line Amp provides freedom from noise in long line situations, with up to 84 dB of ga:n in 15 6-dB steps. It converts any mic to line level and includes an invaluable limiter circuit. The FP12 Headphone Bridging Amp is a must for shotgun and boom operators. It keeps them on target without need for a return line. It's ideal for multiple headphone feeds, troubleshooting, and as an intercom.

For more information on the entire FP line, call or write Shure Brothers Inc., 222 Hartrey Avenue, Evanston, IL 60202-3696. (312) 866-2553.



Circle (8) on Reply Card

# re: Radio

# The FMX system

By Emil Torick

**D**uring the past three months, we have looked at the theory behind FMX. We found that FMX appears to resolve the reduced signal-to-noise ratio problem encountered by stations broadcasting in stereo through the addition of a second subchannel (S'). This signal is transmitted in quadrature with the standard stereo subchannel (S). As we finish our discussion of FMX, let's see how effective the system can be on a practical basis.

Because the system relies on companding for its operation, there is the possibility of errors developing in the receiver. As discussed last month, crosstalk is the major concern. Because crosstalk is program-related, it can add to or subtract from the conventional signal components.

A negative phase error greater than 10° may cause the apparent stage width to be narrowed. In effect, this tends to reduce the audio's stereophonic image. If the phase error is positive, the crosstalk will be out of phase and may contribute to an apparent widening of the stage width, an effect sought by some broadcasters who use additional gain in the S channel of their transmissions. In actual practice, neither effect is likely to be noticed. Because the re-entrant compres-

Torick is vice president, audio technology, for CBS,

sion characteristic effectively limits program peaks in the S' channel, the crosstalk from significant program transients that dominate the psychoacoustic localization process is minimized.

The audio effect is a function both of the amount of compression (gain) of the S' channel and the misalignment of the receiver with respect to proper 38kHz phase.

# System effectiveness

One benefit of the FMX system is improved S/N, but the main benefit to broadcasters may be the extended range of a station's signal. In strong signal areas, the monophonic and stereophonic S/N in most receivers is greater than 70dB and little improvement can be expected. For stereo reception with less than 60dB S/N, the service offers im-


Figure 1. As the map shows, the coverage with FMX-equipped receivers is almost equal provement to the full capability of the

Initial tests were conducted in cooperation with Connecticut public radio station WPKT. The station transmits with an ERP of 19kW and features both music and talk programming. Figure 1 compares the station's reception contours for a received S/N of 60dB for conventional stereo, mono and FMX.

Except for a small area in a mountainous area of the western sector, the stereophonic service extends all the way out to the monophonic contour. Although theory predicts an approximate tripling in the coverage area for non-directional transmissions, the WPKT tests showed an even greater improvement. In this case, the extended 60dB stereo service area quadrupled from approximately 1,200 square miles to 4,800 square miles.

With the emphasis on AM stereo, improvements in the FM broadcast service seem to have taken a back seat. However, the FMX system may now provide additional help to the FM broadcaster attempting to meet the challenge being mounted by AM stereo. In any case, the potential for expanding the useful coverage area of a station's stereo signal through the FMX system is worth investigating.

Editor's note: This material was adapted from an Audio Engineering Society paper presented by Torick at the 70th AES convention, Oct. 12-16, 1985. Torick presented an update on the latest field tests of FMX at the 1986 NAB convention. A copy of his paper is

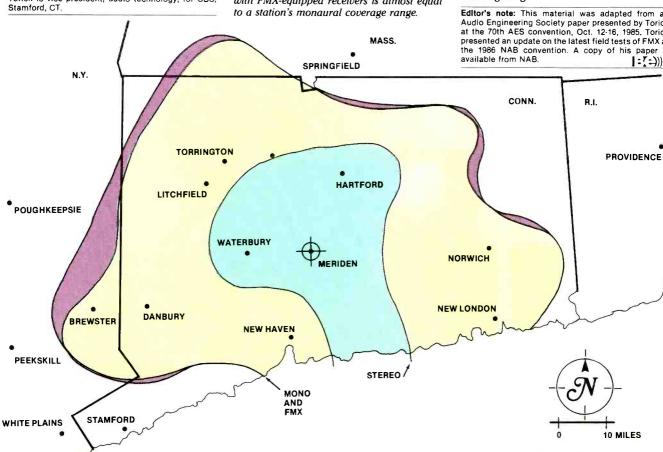

w.americanradiohistory.com

# SEE HOW WE STACK UP.



CRL offers much more than just another limiter for your AM or FM station.

We provide you with any combination of multiband AGC's, four channel processors, and preemphasizing limiter/clippers for your stereo or mono needs.

Because of this, it's no wonder we have been stacked up against the best known audio processors in the industry...and won!

All of our AGC's use multiband, patented circuitry, which avoid noise pull-up during pauses, and automatically correct errors in levels and tonal balance.

Using 6db/octave filters for precision shaping and altering of program material, our 4 channel processors will give you a powerful increase in loudness and still retain musical quality.

Our multiband limiter/clippers use patented low pass clipping filters to provide the final absolute peak and band width control. Our adjustable preemphasis circuits allow you to achieve the maximum in fidelity on typical receivers.

Hear for yourself why CRL has become a leader in audio processing. Call us now, toll free, at 800-535-7648, and we'll arrange for your CRL

dealer to give you a free trial so you can see for yourself how we stack up.



THE PROCESSING SPECIALISTS

Circuit Research Labs, Inc.

2522 West Geneva Drive, Tempe, Arizona 85282

(602) 894-0077

(800) 535-7648

# Satellite technology

# Analyzing antenna types

### By Elmer Smalling III

The antenna system is one of the most important components of an earth station or SNG van. Although these antennas may look similar at first glance, there are three different types of *dishes*, each with its own peculiar characteristics. In order of popularity, they are:

- · prime focus reflector antenna;
- · Cassegrain reflector antenna; and
- offset feed reflector antenna.

Many people refer to the large reflector of an earth-station system as the antenna. This is not correct. The antenna itself is a small element or portion of waveguide located within the feed assembly. The more visible reflector may be 400 to 1,000 times larger than the actual antenna element.

### Prime focus

The prime focus antenna system is the most common type of satellite earth-station antenna system. It consists of a large surface reflector with a parabolic shape. The antenna, which may be less than an inch long, and the associated low-noise amplifier (LNA) are located at the focal or prime focus point of the reflector. The two items may be supported in front of the reflector on a large buttonhook or at the apex of a support tripod.

The parabolic reflector shape ensures that all portions of the impinging signal wavefront reach the apex or antenna at the same time. Furthermore, all parallel rays that strike the inside face of the parabolic curve will be directed toward the focal point to achieve the most signal gain.


There are two general drawbacks to the prime focus system. First, the antenna support structures, either the buttonhook or the LNA/feed support tripod, cause some signal blockage. Second, the LNA and other feed equipment are not easily accessible.


# Cassegrain


The Cassegrain antenna derives its name from an optical telescope design that uses primary and secondary mirrors. The Cassegrain reflector goes a step further than the prime focus type. Instead of a tiny microwave antenna at the focal point, a small convex reflector focuses the incoming signal energy from the main reflector back down to the antenna

Smalling, **BE**'s consultant on cable/satellite systems, is president of Jenel Systems and Design, Dallas.









and LNA located at the hub or apex of the parabola.

The secondary subreflector has a hyperbolic shape that, along with the parabolic shape of the large reflector surface, causes all reflected signals to have identical length paths to or from the antenna. It is important that all signal paths to or from the antenna be the same length so that they will arrive at the antenna at the same time *in phase*.

The Cassegrain style has advantages over the prime focus type. First, the antenna and LNA are mounted at the hub of the large reflector, making them more accessible. Second, any spillover signal that reaches the large reflector comes from the area of the small subreflector and the sky. While a prime focus system allows reflections from the ground to reach the antenna, the Cassegrain system avoids these sources of possible interference. The spillover generated noise of the Cassegrain system is, therefore, much lower. The presence of the subreflector structure does create more signal blockage than with the prime focus design.

The equivalent focal length of the Cassegrain antenna system is longer than for an equivalent diameter prime focus. As a result, the cross polarization is less. Cross polarization occurs when signals, which are purposely transmitted in the vertical or horizontal planes, cross back and interfere with each other.

The subreflector may be elliptical in shape, in which case the system is called a *Gregorian* reflector. The Gregorian system allows a system design with a smaller focal length and may be used when system package size is critical.

## Offset

Offset antennas are popular in SNG applications. These systems may have a single or double reflector design. In some cases, the antennas do not incorporate parabolic reflectors, which would ensure that all impinging waves are in perfect phase. As a result, the shape of the reflector for offset antennas must be carefully designed to achieve a constant phase condition across the reflector.

Spherical reflector surfaces are a popular alternative for offset systems, because the spherical shape allows for multiple focus points or feeds without astigmatism. As such, spherical reflector systems are used when antenna systems must communicate with multiple satellites over the geostationary arc.

Offset reflector designs do not have to suffer from blockage by subreflector and/or LNA support spars, because the support arms are not in line with incoming signals. These systems are easily folded and stored, making them more applicable to portable operations. In addition, the feed point and LNA are located near the base of the antenna and are easily accessible.

# ONE LESS ALLIGATOR

The Broadcast Engineer works with time-line responsibilities few of us will ever experience. He knows that equipment problems can wreck production schedules.

That's why the Otari BII audio machine is so widely used for broadcast, news editing, and production.

Three speed operation, front panel record calibrations, a microprocessor controlled tape counter with LED display, and variable speed control, coupled with "bulletproof" reliability and high level product support all add up to one less alligator snapping at your heels. From Otari: The Technology You Can Trust.

Contact your nearest Otari dealer for a demonstration, or call Otari Corporation, 2 Davis Drive, Belmont, CA 94002 (415) 592-8311 Telex: 910-376-4890



# Synchronous AM in FM systems

By Jerry Whitaker, editor

he output spectrum of an FM radio transmitter or TV aural transmitter contains many sideband frequency components, theoretically an infinite number. Pairs of sideband components are spaced from the carrier by multiples of the modulating frequency. The total RF power output of the transmitter remains constant with modulation, but the distribution of power into the sideband elements changes with the modulating waveform. Power at the carrier frequency is reduced by the amount of power shifted to the sidebands.


The practical considerations of transmitter design and frequency allocation make it necessary to restrict the bandwidth of all FM broadcast signals. Bandwidth restriction brings with it the undesirable side effects of distortion in the demodulated output of a receiver, phase shifts through the transmission chain and the generation of synchronous AM components. In actual practice, a signal of acceptable quality can be transmitted through the bandwidth allocated to an FM broadcast station or TV aural channel. This process, however, requires tradeoffs in performance. The key to this effort is the design of a system that takes advantage of all available bandwidth, while preserving the maximum spectral purity possible.

# **Bandwidth limiting**

In most medium- and high-power FM and TV aural transmitters, the primary out-of-band filtering is performed in the output cavity of the final stage. Previous stages in the transmitter (the exciter and IPA) are designed to be broadband, or at least more broadband than the PA output. The goal is to limit the bandwidth of the transmitter RF signal at one stage only. In this way, control over system bandwidth can be tightly maintained, and the tradeoffs required in any practical FM system can be optimized. If, on the other hand, more than one narrowband stage exists within the transmitter, adjustment for peak efficiency and performance can be a difficult proposition.

The following factors can affect the bandwidth of an FM or TV aural transmitter:

- •the total number of tuned circuits in the system:
- •the amplitude and phase response of the total combination of all tuned circuits in the RF path;
- •the amount of drive to each RF stage (saturation effects); and



 the non-linear transfer function within each RF stage.

Although generally the domain of the transmitter design engineer, the following techniques can be used to improve the bandwidth of a given system:

- Maintain wide bandwidth until the final RF stage. This can be accomplished through the use of a broadband exciter and broadband (usually solid-state) IPA.
- •Minimize the number of interactive tuned networks within the system. Through proper matching network design, greater bandwidth and simplified tuning can be accomplished.
- •Use a single-tube design (for mediumand high-power transmitters) or a broadband, complete solid-state design (where practical). The objective here is to maintain wide bandwidth until the last possible point in the RF chain.

Bandwidth affects the gain and efficiency of any FM RF amplifier stage. The bandwidth is determined by the load resistance across the tuned circuit and the output or input capacitance of the RF stage. Because grid driven PA tubes typically exhibit high input capacitance, the PA input circuit generally has the greatest effect on bandwidth limiting in an FM transmitter.

The grid circuit can be broadened through resistive swamping in the input circuit, or through the use of a broadband input impedance matching network. One approach involves a combination of series inductor and shunt capacitor circuit elements implemented on a printed circuit board. (See Figure 1.) In this design, the inductors and capacitors are etched into the copperclad laminate of the PC. This approach provides the necessary impedance transformation from a  $50\Omega$  solid-state driver to a high-impedance PA grid in a series of small steps, rather than more conventional L, pi or tee matching networks.

### Synchronous AM

As the bandwidth of an FM transmission system is reduced, synchronous amplitude modulation increases for a given carrier deviation (modulation). Synchronous AM is generated as tuned circuits with finite bandwidth are swept by the frequency of modulation. The amount of synchronous AM generated is dependent on tuning, which determines (to a large extent) bandwidth, and deviation from the carrier frequency. Figure 2




Figure 1. A broadband impedance matching network designed to couple the  $50\Omega$  output of a solid-state driver to a high-impedance PA tube grid.




Figure 2. The generation of synchronous AM in a bandwidth-limited FM system. Note that minimum synchronous AM occurs when the system operates in the center of its passband.

= MODULATING FREQUENCY

illustrates how synchronous AM is generated through modulation of the FM carrier.

Next month, look for more on the synchronous AM problem and how it can be minimized.

Bibliography

"Testing Television Mendenhall, Geoffrey N. Transmission Systems for Multichannel Sound Compatibility." Broadcast Electronics, Quincy, IL,

ershberger, David, and Robert Weirather. "Amplitude Bandwidth, Phase Bandwidth, Inciden-Hershberger, tal AM, and Saturation Characteristics of Power Tube Cavity Amplifiers for FM." Harris Corporation, Quincy, IL, 1982.

Mendenhall, Geoffrey N. "A Systems Approach to Improving Subcarrier Performance." 1986 NAB Engineering Conference Proceedings. 1:(:-))))



A free guide from the company with the broadest, most experienced customer base in the industry: 150 stereo TV stations on-theair. A guide that's worth looking into.

Included are:

☐ **Application Notes:** Helpful installation and setup hints. How BTSC Stereo works. Connecting the stereo generator to exciters. Modifying RCA exciters. Monitors, demodulators, and stereo decoders. Feeding stereo over microwave discrete or composite.

☐ New Orban Stereo Television System brochure: Details on the OPTIMOD-TV Audio Processor, Studio Chassis Accessory, TV Stereo Generator, SAP and Pro Generators.

Hease send me your free Orban Guide to it stereo. Ch 94 101 Whease send the your free Orban Guide to The Stereo. ☐ Automatic Stereo Synthesizer: How it can provide your station with a convincing sense of ambience and spaciousness from mono source material. Automatic recognition and switching between mono and stereo. Automatic correction of phase-reversal.

☐ List of Orban Stereo TV Stations On-the-Air.

☐ Complete pricing and ordering guide.

To get your own free Orban Guide to Stereo TV, send in the coupon, circle the reader service card, or call us direct: (800) 227-4498 or (415) 957-1067.

Orban Associates Inc.

645 Bryant Street, San Francisco, CA 94107

orban

TO EASY STEREO TV

INSTALLATION.

Circle (11) on Reply Card

# **Troubleshooting**

# Using power tubes

By Jerry Whitaker, editor


Maintenance of the air-handling system for the PA stages of a broadcast transmitter is a relatively simple but extremely important part of routine plant maintenance. Regularly check the condition of all ducts, boots and blower cages inside the transmitter. A unit that has been in operation for a number of years can suffer from reduced air-system efficiency because of the collection of microdust on the blades and cage of a blower or along the sides of a discharge duct or boot.

A convenient method for checking the efficiency of a transmitter cooling system over a period of time involves documenting the back pressure that exists within the PA cavity. This measurement should be made with a manometer, a simple device that is available from most HVAC suppliers. The connection of a simplified manometer to a transmitter PA input compartment is illustrated in Figure 1.

Be extremely careful when using the manometer to ensure that the water in the device is not allowed to backflow into the PA compartment. Do not leave the manometer connected to the PA compartment when the transmitter is on the air. Make the necessary measurement of PA compartment back pressure and disconnect the device. Seal the connection point with a subminiature plumbing cap or other hardware.

By charting the manometer readings, it is possible to accurately measure the performance of the transmitter cooling system over time. Changes resulting from the buildup of microdust may be too gradual to be detected except through back pressure charting. Be certain to take the manometer readings during periods of calm weather. Strong winds can result in erroneous readings because of pressure or vacuum conditions at the transmitter air intake or exhaust ports.

Deviations from the typical back pressure value, either higher or lower, could signal a problem with the air-handling system. Decreased PA input compartment back pressure could indicate a problem with the blower motor or a buildup of dust and dirt on the blades of the blower assembly. Increased back pressure, on the other hand, could indicate dirty PA tube anode cooling fins



or a buildup of dirt on the PA exhaust ducting to the outside. Either condition is cause for concern.

## Blower maintenance

A transmitter suffering from reduced air pressure into the PA compartment should be serviced as soon as possible. Failure to restore the cooling system to proper operation could lead to premature failure of the PA tube or other components in the input or output compartments. Blower problems in a transmitter do not improve with time. They always get worse.

Failure of the PA compartment airinterlock switch to close reliably may be an early indication of impending coolingsystem trouble. Such failures could be caused by normal mechanical wear or vibration on the switch assembly. Or, they may signal that the PA compartment air pressure is dropping. In such instances, documentation of manometer readings will show whether the trouble is caused


by the failure of the air-pressure switch or a decrease in the output of the airhandling system.

# Warm-up/cool-down

The recommended warm-up period between application of filament-on and plate-on commands should be followed closely. Most transmitter manufacturers specify a warm-up period of about five minutes. The minimum warm-up time should be two minutes. Some units include a time delay relay to prevent the application of a plate-on command until a predetermined warm-up cycle. Do not defeat these protective circuits. They are designed to extend PA tube life.

Most transmitter manufacturers also specify a recommended cool-down period between the application of plateoff and filament-off commands. This cool-down, generally about 10 minutes, designed to prevent excessive temperatures on the PA tube surfaces when the cooling air is shut down. Large vacuum tubes contain a significant mass of metal, which stores heat quite effectively. Unless cooling air is maintained at the base of the tube and through the anode cooling fins, excessive temperature rise can occur. Again, the result can be shortened tube life or even catastrophic failure because of seal

Most tube manufacturers suggest that cooling air continue to be directed toward the tube base and anode cooling fins after filament voltage has been removed to further cool the device. Unfortunately, however, few transmitter control circuits are configured to allow

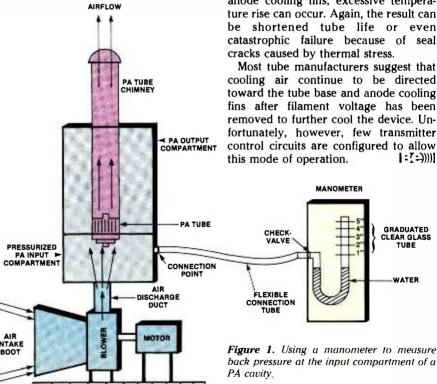

Broadcast Engineering July 1986

# Dealers choice!



JVC's CR-850U Editing VCR. It's the one video dealers choose when selecting VCRs for 3/4" editing. On-line systems. A-B roll sys-

On-line systems. A-B roll systems. Off-line systems. Remote vans. Rental departments. Newsroom editing. Computer graphics. Animation systems... Just a few of the applications where customers need the best, and dealers choose the CR-850U to make sure they get it.

Why the CR-850U? Excellent cicture quality: the result of an ncreased S/N ratio, Y-688 dubbing, special noise reduction circuitry. Fast, accurate editing: the benefit reaped from the direct drive tape transport system and the separate SMPTE time code address track.

The new front load, rack-mount design with parallel and serial remote control capability allow easy interface with existing and new edit systems. Built-in self

Circle (12) on Reply Card

diagnostic circuits with front panel test points speed maintenance and adjustments.

Dealers' choice, yes! But the odds are always in your favor, whatever your application, with the JVC CR-850U.

See your JVC Professional Video Dealer today or, for literature call toll-free:

# 1-800-JVC-5825

JVC COMPANY OF AMERICA Professional Video Communications Division 41 Slater Drive Elmwood Park, NJ 07407 JVC CANADA, Scarborough, Ontario



# Management for engineers

# Managing the management transition

By T. Lowell Landrum, Ph.D.

As you look over your career, you probably can point to events that strongly influenced it and perhaps even changed the direction you originally intended to go. If you're a broadcast engineer who unexpectedly became a manager, you would probably point to whatever it was that catapulted you into management.

A love of electronics is usually the reason engineers enter the radio or TV field. Yet, as they demonstrate their electronics skills, many of them are rewarded with promotions that take them out of electronics and place them into supervisory or management positions.

The transition from electronics specialist to people manager is often accompanied by a sense of awe, and perhaps, fear. After all, you've spent years developing electronics-related skills, not managerial techniques. The thought of having to begin developing supervisory skills—interacting with people instead of tending to equipment on a full-time basis—is more than just a little frightening.

For a large number of broadcast engineers, chances are that they have never received any kind of managerial training. Knowing how to manage others effectively comes naturally for some, but for many, a sudden promotion to management takes them from a position in which they were comfortable and knowledgeable to one in which they are unprepared to handle the tasks ahead. They lack the tools to get the job done.

## Jigsaw puzzle management

Let's assume that you have been recently promoted to a supervisory position. Furthermore, let's assume that you are one of the lucky ones because your company decides to send you to school to learn some management techniques. What will you encounter as you return to the classroom?

The first thing you might learn is that there are different management philosophies. One of them is called *jigsaw puzzle management*. Under this philosophy, you compare the functions and skills of management to the pieces of a puzzle. Each piece of the puzzle

represents a particular skill that will be necessary for you to master in order to perform your job.

Like the pieces of a jigsaw puzzle, every skill is locked into several others, and when certain skills fall into place, others will follow. When you are able to put all the pieces together, you become a complete picture of a manager. This is the picture you will portray to your subordinates, peers and supervisors on a day-to-day basis. The managerial jigsaw puzzle includes these pieces, or skills:

- •Planning. You must be able to plan not only daily activities, but also short- and long-range projects. The effective manager knows the importance of developing work plans. These plans must be flexible so that they can be reshaped as situations change.
- •Organizing. This means more than simply having the right material at the right time. Effective organization includes assigning people to positions of responsibility for which they are suited. You should not grab the first available person for a task. It may be that a particular person is inappropriate or untrained for the project. Good managers organize the work so that people are used to their best advantage.
- •Motivating. This is an often misunderstood term because, in reality, people motivate themselves. A manager must learn what will make staff members motivate themselves. Understanding that different things motivate different people and tailoring the incentive to the individual are the keys to successful motivation.
- •Communicating. More complex than you might think, communication is more than talking or writing to each other; it is developing an *understanding* of what is needed to accomplish a job *before* it is started. As a manager, you cannot solve problems, train people or delegate tasks without effective communication.

# Leadership styles

There are many leadership styles and just as many names for them, such as: deserter, missionary, autocrat, bureaucrat, developer and executive. More im-

portant than the names of the modes of leadership, however, is that a manager is able to borrow something from each style. Leaders who cannot shift from one leadership style to another, depending on the situation at work, will face difficulties on the job.

A manager must be sensitive to the particular needs of employees. If an individual's job-related needs go unfulfilled, that person's frustration can lead to poor performance, ineffectiveness and a vast range of problems that can also affect the rest of the staff. The style of leadership plays a role in how managers meet, or fail to meet, the needs of a staff.

Group behavior is perhaps one of the more important areas about which managers need to know. People play many different roles in an attempt to be recognized or accepted by a group. Such roles as informal leader, enforcer, clown, guard or house lawyer are often taken on by employees within a staff. Understanding how these roles are typically acted out can help managers deal with them.

### Other skills

There are a myriad of other managerial skills that you must develop and constantly improve in order to be an effective supervisor. These include delegating, managing time, training personnel, handling conflicts and coping with job stress.

Developing the skills to be a good manager takes both time and effort. If you work for a company that recognizes the value of training and is willing to send you to seminars to improve your management skills, take advantage of this opportunity. On the other hand, it may be that you will have to read and study on your own to learn about becoming an effective manager. Although it is usually not as enlightening as a classroom experience, it can help you to broaden your perspective and lead you to some solutions.

Supervising others might seem a little like hocus pocus, especially at first, when a broadcast engineer goes from the absolute science of electronics to the not-so-absolute area of management. Just remember, you didn't learn all you know about electronics all at once.

1:(:-))))]

Landrum is executive vice president for the Center for Management Institutes, Lafayette, IN.



More than 800 on-air BMX consoles have been installed in hundreds of stations since their introduction in 1979. For these stations, it didn't make good sense to compromise their operations with a "lookalike" BMX. Taking big chances with shortcuts to save a few bucks rarely does.

Today, it still doesn't make much sense to settle for less than the best — that is, if on-air quality and smooth, reliable operations are your goals. And that's precisely where a PR&E console fits into your station.

Our BMX Series now has two models, the original Series II and the new Series III. Both have the quality you expect. Both offer the same legendary operational ease. Both are fully modular consoles which can be easily configured to accommodate any station's operations.

The BMX Series II is the same affordable "combo" board many competitors have tried to duplicate but never equalled.

The new BMX Series III offers additional features and more flexibility; we refer to it as our "turbo" version.

Either way, there's now two great choices for a bulletproof on-air BMX console. And, two ways to get a great deal on the features and performance you need — without compromising the quality you want.

Contact us now for all the technical details on both.

With a PR&E console, you'll get a lot more than just a great deal. You'll get the real value of a genuine BMX.

# Hands Down, the # I Choice.

Pacific Recorders & Engineering Corporation 2070 Las Palmas Drive Carlsbad, California 92008 (619) 438-3911 Telex: 181777



# Video waveform monitoring

By Margaret Feisel

# Waveform and vector monitors tell a story about video signal quality that a picture monitor can't.

signals is necessary to avoid confusion

Someday, you may be able to walk into a TV studio, flip a single switch and instantly send perfect TV signals throughout the facility. Today's studios, however, simply don't work that way. Equipment malfunctions, signals become distorted and a good deal of adjustment is required. Because of these problems, the waveform monitor and vectorscope are necessities at every video facility. Both instruments have existed for more than 20 years, but new models with new features are still being introduced. They continue to provide the best method of getting the necessary information to you. They let you see the signals.

Waveform and vector monitors are specialized oscilloscopes adapted for the video environment. The waveform monitor is much like a traditional oscilloscope, operating in a voltage vs. time mode. Its time base triggers automatically on sync pulses in the TV signal, producing line- and field-rate sweeps. Filters, clamps and other circuits process the video signal for specific monitoring needs.

The vectorscope operates in an X-Y voltage vs. voltage mode to display chrominance information. It decodes the signal in much the same way as a TV monitor or receiver to extract color information.

The two instruments serve separate, distinct purposes as they sit side by side in a rack, monitoring the same signal. Some newer models combine functions, packaging both monitor types on one chassis with a single CRT. Others have a communications link between two separate instruments.


Beyond basic signal monitoring, the instruments provide a means to identify and analyze signal aberrations. If the signal is distorted, these instruments allow a technician to learn the extent of the problem and to locate the offending equipment.

# **Basic waveform measurements**

Waveform monitors are used to evaluate the amplitude and timing of video signals and to show timing relationships between two or more signals. The familiar color-bar pattern is the only signal required for these basic tests.

A word of caution about the color-bar

and possible inaccurate measurements. All color bars are not created equal. Some generators offer a choice of 75% or 100% amplitude bars. Although sync, burst and setup amplitudes remain the same for the two color-bar signals, peak-to-peak amplitudes of high-frequency chrominance information and low-frequency luminance levels change. The saturation of color, a function of chrominance and luminance amplitudes, remains constant at 100% in both modes. The 75% bar signal has 75% amplitude with 100% saturation. In 100% bars, amplitude and saturation are both 100%.



**Figure 1.** Color bars on a waveform monitor, 75% amplitude, 100IRE white, 2H sweep.

Chrominance amplitudes for 100% bars exceed the maximum amplitude that should be transmitted. Therefore, 75% amplitude color bars, with no chrominance information exceeding 100IRE, are the standard amplitude bars for NTSC. In the 75% mode, a choice of 100IRE or 75IRE white reference level may be offered. Figure 1 shows 75% amplitude bars with a 100IRE white level. Either white level can be used to set levels, but operators must be aware of which signal has been selected. SMPTE bars have a white level of 75IRE as well as a 100IRE white flag.

For a waveform monitor to make precise evaluations of signals, the monitor itself must be functioning properly. It should be periodically taken to a service center for calibration. The internal calibration signal for precise gain and sweep adjustments should be used regularly.

Select the calibration signal on the front panel and, if necessary, adjust the vertical gain calibration control until the square wave signal is exactly 140IRE

units in amplitude. (Some instruments may require settings of 100IRE units. Consult the manual.)

If the signal is also a sweep calibrator, adjust the horizontal calibration control so that the square wave crosses the graticule base line at the major division marks. Figure 2 shows a typical calibrator signal. The adjustments are generally done with a screwdriver; don't confuse calibration controls with variable gain knobs.

Another preliminary consideration is the dc restorer setting. The dc restorer normally should be *on*, to stabilize the display from variations in average picture level (APL). Some instruments offer slow or fast dc restorer speeds. The slow speed maintains an average dc level, but permits the observation of low-frequency abnormalities, such as 60Hz hum. The fast speed removes most of the hum.

Most waveform monitors have filters that process the signal in order to display certain components. The *flat* response is best for basic monitor functions, because it displays the entire signal. In Figure 1, a flat response has been selected. The




Figure 2. A waveform monitor calibrator signal.



Figure 3. Chroma filter response with color bars. 2H sweep.

Feisel is a design engineer for Tektronix, Beaverton,

chroma response filter removes luminance and displays only chrominance, as shown in Figure 3. The low-pass filter removes chrominance, leaving only lowfrequency luminance levels in the display. (See Figure 4.)

The IRE filter was originally designed to average out high-level, fine-detail peaks on a monochrome TV signal, aiding the operator in setting brightness levels. The IRE response removes most, but not all, of the chrominance. Even so, the IRE mode can be useful for observing luminance levels, as shown in Figure 5.




Figure 4. Low-pass filter response with color bars, 2H sweep.



Figure 5. IRE filter response with color bars, 2H sweep.

### Video amplitudes

The overall amplitude of the video signal is an important parameter to monitor. Deviations from the nominal 1V signal, expressed in IRE units or as percentages, are referred to as insertion gain or loss. Any equipment in the video path may change the gain, with the errors cascading to result in severe picture impairments. Even small changes in brightness can be perceived by the human eye.

The insertion gain errors, whether too large or too small a signal amplitude, may eventually manifest themselves as signal distortions. It is, therefore, important for each piece of equipment to accurately transfer a 1V signal at its input to a 1V signal at the output. Insertion gain is measured at the output of every active device in the signal path.

To check overall amplitude, position the displayed waveform vertically, until the blanking (back porch) level overlays the 0IRE graticule line. A vertical scale on the graticule divides the standard 1V video signal display into 140IRE units-100IRE above the base line and 40IRE below. The white level should come just to the 100IRE or 75IRE mark, depending on the color bars used.

Sync should extend to -40IRE, while setup (the black part of the color bars) should be at 7.5IRE. Setup and peak white are generally the only luminance levels checked with the color-bar signal. A linearity signal can be used to check intermediate luminance levels, but linearity is usually not considered necessary for basic insertion gain evaluation.

Some chrominance checks should be part of an insertion gain measurement procedure. Check (and adjust) the burst amplitude, making certain that it is 40IRE peak to peak, centered on the OIRE mark. Verify that peaks of chrominance on the first and second 75% signal bars reach the 100IRE line. A vectorscope is better suited to precisely evaluate chrominance amplitudes and will be discussed later in this article.

# Sync pulses

The duration and frequency of the TV system sync pulses also must be monitored. Horizontal sync width should be watched closely. Most waveform monitors have 0.5 µs or 1 µs per division magnification (MAG) modes, which help to verify that H-sync width is between 4.4 µs and 5.1 µs, when measured at the -4IRE point. On waveform monitors with good MAG registration, sync appearing in the middle of the screen in the 2-line mode remains centered when the sweep is magnified.


It is a good idea to check the rise and fall times of sync and the widths of the front porch and entire blanking intervals. Examine burst and count the cycles. There should be between eight and 11 cycles of subcarrier.

Check the vertical interval for correct format and measure the timing of the equalizing pulses and vertical sync pulses. The acceptable limits for these parameters are shown in the most recent FCC pulse width specification, reproduced in Figure 6.

### System timing

The sync pulses of all signals must be in the same phase at the point in the studio at which they are combined. If they are not properly timed, the viewer will see a horizontal shift when the program switches from one source to another. Even though all signals are locked to the house reference, timing errors arise as signals travel through different cable lengths, delaying one with respect to the other. Therefore, timing delay for each piece of equipment must be adjusted to bring all signals into coincidence at the switcher.

To compare signal timing adjustments, connect a waveform monitor at the output of the switcher. Select the external reference with the house reference (probably blackburst) signal connected to the






Figure 6. FCC pulse-width requirements as of March 14, 1985.

external reference input. First, select this reference signal on the switcher and display it on the waveform monitor in the 2H MAG sweep mode. Adjust the horizontal position control on the waveform monitor to place the 50% amplitude point of the leading edge of sync on one of the horizontal axis graticule marks. (Do not change this horizontal position knob setting until system timing is finished.) Now, switch through the video sources one by one, adjusting each source so that the leading edge of sync falls on the same graticule mark as the reference signal.


Why time to the blackburst house reference? The truth is that black really does not need to be phased, if it is never to be a program input. Any signal could be brought up first and other signals matched to it. However, something has to be the reference and blackburst is a handy place to start.

### Monitoring


The procedures described thus far are performed with test signals before anything goes on-air. During editing or broadcasting, set the waveform monitor in the 2H sweep mode. Keep an eye on it in case levels need adjustment. If something goes drastically wrong with the picture, check the waveform monitor first. Has sync or burst disappeared? Are the amplitudes correct? The waveform monitor will provide clues to the nature of the problem.

Some waveform monitors have a dual filter mode, enabling the video operator to observe luminance levels and overall amplitudes at the same time. In this mode, the instrument switches between the flat and low-pass filters. With a 2H sweep selected, the display on the left is low-pass filtered, while information to the right is unfiltered. The line select Continued on page 26

# Introducing the 3D-ILLUSTRATOR BOSCH the paint system of the future — from BOSCH

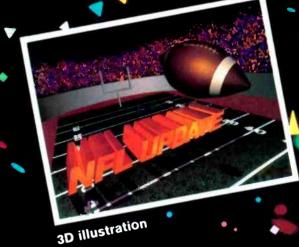



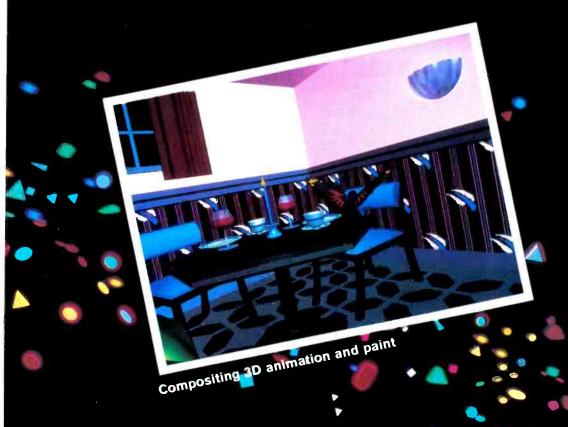

# Reach into the future with the FGS-4000

Bosch introduces a new concept for your graphics studio, integrating all your graphic needs into one system.

The 3D Illustrator, a new software feature for the FGS-4000, brings the world of paint into the third dimension. This paint system combines all the conventional features expected from a quality paint system, then goes beyond by adding three-dimensional capabilities. The artist can actually build the objects required for the painting, position them into the scene, and add up to 16 colorable light sources to illuminate the scene, just as a photographer would in a studio. This gives the artist the freedom to quickly generate many variations by changing the point of view or the position of the lights. Other tools at the artist's fingertips include stenciling, cut and three-dimensional paste, magnification for touch-up, color or luminance only paint, text manipulation in three-dimensional space, and automated rotoscoping. This innovative approach opens the door to innumerable possibilities.

The 3D Instrator can be purchased as a stand alone three-dimensional paint system, and upgraded at any time to the FGS-4000 three-dimensional animation system. Bosch leads the way in providing solutions to your graphics needs—today and tomorrow.



# BOSCH

Robert Bosch Corporation Video Equipment Division

2300 South 2300 West
P.O. Box 30816
Salt Lake City, Utah 84130-0816
(801) 972-8000 Telex: 38-8352 SLC
Circle (13) on Reply Card

Continued from page 23 mode (which will be discussed in more detail) is another useful feature for monitoring live signals.

# Basic vectorscope measurements

The vectorscope displays chrominance amplitudes, aids hue adjustments and simplifies matching relative burst phases of multiple signals. These functions require only the color-bar test signal.

To evaluate and adjust the chrominance in the TV signal, observe color bars on the vectorscope. The vectorscope should be in its calibrated gain position. Adjust the vectorscope phase control to place the burst vector at the 9 o'clock




Figure 7. Color bars on a vectorscope.



# FREEZE FRAME BROADCASTING

Colorado Video offers three urique solutions to the effective, low cost delivery of visual information:

- Subcarrier transmission of "still-frame" color images in 8 seconds over a 10 kHz channe. Use FM radio, television or satellite.
- Vertical interval multiplexing in a conventional television signal.
- Time division multiplexing of single frames into a normal TV program (or mix four separate programs onto a single channel with slightly reduced motion reproduction).

Selective addressing may be used to allow special routing to individual locations. Computer image storage and retrieval provides exceptional programming convenience.

Call us for more information.

# Colorado Video Inc.

Box 928 Boulder, Colorado 80306 USA (303) 444-3972 TWX 910-940-3248 COLO VIDEO BDR

Circle (14) on Reply Card

position, and note the vector dot positions with respect to the six boxes marked on the graticule. If everything is well adjusted, each dot will fall on the crosshairs of its corresponding box, as shown in Figure 7.

### Chrominance amplitudes

The chrominance amplitude of a video signal determines the correct intensity or brightness of color. If the amplitudes are correct, each color dot falls on the crosshairs in the corresponding graticule box. If vectors overshoot the boxes. chrominance amplitude is too large; if they undershoot, it is too small.

The boxes at each color location can be used to quantify the error. In the radial direction, the small boxes indicate a  $\pm 2.5$ IRE deviation from the standard amplitude. The large boxes indicate a ±20% error. Adjust chrominance amplitude on the signal source to get as close to zero error as possible.

### **Hue control**

The hue control on TV equipment changes the phase of the color burst with respect to the rest of the signal. If it is improperly adjusted, viewers will not see true colors. Even small hue errors are undesirable, because very slight skin tone variations are noticeable. When the hue control is adjusted, the burst will remain in the 9 o'clock position as the other dots rotate around it, falling into their boxes. Again, the graticule boxes indicate the extent of the error in the circumferential direction. The small boxes represent ±2.5° error, while the large boxes indicate  $\pm 10^{\circ}$ .

# **Burst phasing**

A vectorscope can be used to make sure that signals from various sources have the same phase of burst. If all burst signals are not properly phased, color shifts will occur when switching between sources. This adjustment is related to sync timing with a waveform monitor and is done in much the same way.

Connect the test instrument at the output of the switcher and select the external reference on the vectorscope. Switch up the reference signal first and use the vectorscope phase control to set the burst at 9 o'clock. (Do not move the phase control until burst phasing is finished.) Then, switch up each source, adjusting the phase control on the source until its burst vector is also at 9 o'clock.

# Monitoring

Vectorscopes are primarily setup tools and are less useful than waveform monitors for watching live video. Burst can be distinguished, but the picture information is usually a blur. An exception to this is the use of a vectorscope to match the tints in backgrounds.

### Other capabilities

The functions discussed thus far are

# NEW FROM ARRAKIS SYSTEMS 5000 SERIES

The First No-Compromise Modular Radio Console...



...At A Down-To-Earth Price: 16 Channels, Under \$10,000.

# THE FEATURES YOU WANT-

- 16 Modular Stereo Channels.
- Program, Audition and Mono Mixdown Balanced Outputs.
- Telephone Mix-Minus Buss.
- Full Monitoring Facilities.
- Remote Equipment Start/Stop.
- Remote Module Control.
- Standard Digital Clock and Timer.
- Optional EQ and Effects Modules.

# THE DEPENDABILITY YOU NEED-

- DC Controlled No Audio On Pots.
- Rugged Modular Construction.
- Penny & Giles Slide Faders.
- ITT Schadow Switches.
- NE5532 IC Module Design.
- External Regulated Power Supply.
- Superb Audio Performance Specs.
- Most Important, Arrakis Systems Designed-in Ultra Reliability!

For features, performance, price and reliability,

NOBODY BUILDS CONSOLES LIKE ARRAKIS.

Call (303) 224-2248

Circle (15) on Reply Card

arakis Systems, INC

ARRAKIS SYSTEMS INC. 2609 RIVERBEND COURT FORT COLLINS, CO 80525

the common uses for vector and waveform monitors and are routinely performed in most studios. There are additional uses, however, that require an instrument with a more advanced feature set, a more skilled operator or both. Some of these involve identifying problems, while others are precise measurements to quantify equipment aberrations.

Other test signals, including modulated staircase or multiburst, are required for many of these tests. It is important to take a good look at how these signals appear immediately after they come out of the generator. Knowing what the undistorted waveform looks like simplifies the identification of distortions.

### Line select


Some models of waveform monitors and vectorscopes have line select capability. They can display only one or two lines out of the entire video frame of 525 lines. (In the normal display all of the lines are overlaid on top of one another.) The principal use of this single line feature is to monitor VITS signals. VITS allows in-service testing of the transmission system, because precise evaluation of signal quality is possible with test signals.

A full-field line selector generally drives a picture monitor output with an intensifying pulse. The pulse causes a single horizontal line on a picture monitor to be highlighted. This indicates where the line selector is within the frame and correlates the waveform monitor display with the picture.

# Linear distortion: frequency response

Frequency response refers to the TV system's capability to respond uniformly to signal components of different frequencies and is generally evaluated with a waveform monitor. Different signals are required to check the various parts of the frequency spectrum. If the signals are all faithfully reproduced on the waveform monitor after passing through the video system, it is safe to assume that there are no serious frequency response problems.

At very low frequencies, look for externally introduced distortions, such as



**Figure 8.** A 2-field sweep on a waveform monitor, showing ac mains hum distortion.

power-line hum or power-supply ripple, and distortions resulting from inade-quacies in the video equipment itself. Low-frequency distortions will probably appear on the TV screen as flickering or slowly varying brightness. Low-frequency interference can be seen on a waveform monitor if the dc restorer is operating in the slow mode and a 2-field sweep is selected. Sine wave distortion from ac power-line hum is quite evident in Figure 8.

A bouncing APL signal can be used to detect distortion in the system itself. Vertical shifts of the blanking and sync levels indicate the possibility of low-frequency distortion.

Field-rate distortions appear as a difference in shading from the top to the bottom of the picture. A field-rate 60Hz square wave is best for measuring field-rate distortions. Distortion occurs as tilt in the waveform in 2-field mode with the dc restorer off. If a 60Hz square wave is not available, a window signal can also be used.

Line-rate distortions manifest themselves as streaking, shading or poor picture stability. To detect errors of this nature, look for tilt in the bar portion of a pulse-and-bar signal. The waveform monitor should be in the 1H or 2H mode with the fast dc restorer selected for the measurement.

The multiburst signal is used to test the high-frequency response of a system. The multiburst, shown in Figure 9, includes packets of discrete frequencies within the TV passband, with the higher frequencies toward the right of each line. The highest frequency packet is at about 4.2MHz, which is the upper frequency limit of the system. The next packet to the left is near the color subcarrier frequency (3.58MHz) and is used to check the chrominance transfer characteristics.




Figure 9. Undistorted multiburst, 2H sweep.

The remaining packets are distributed down to 500kHz. The most common distortion is high-frequency rolloff, seen on the waveform monitor as reduced amplitude packets for the higher frequencies (see Figure 10). The TV picture exhibits loss of fine detail and color intensity when this type of distortion is present. High-frequency peaking, appearing on the waveform as higher amplitude packets at the higher frequencies, causes



Figure 10. Multiburst signal exhibiting high-frequency rolloff.

ghosting on the picture.

# Non-linear distortion: differential phase

Non-linear, or level-dependent, distortions are another type of picture impairment. One non-linear distortion is differential phase (d $\Theta$ ), which is present if a change in luminance level produces a change in the chrominance phase. If the distortion is severe enough, TV viewers will note that the hue of an object changes as its brightness changes. A modulated staircase or ramp is used to measure this. Either signal places chrominance of uniform amplitude and phase at different luminance levels. Figure 11 shows a 100IRE modulated ramp. Because dO may change with changes in APL, several measurements of this distortion are necessary to fully evaluate system response. Measure d $\Theta$  at the center and at the two extremes of the APL range available on the test signal generator.



Figure 11. A 100IRE modulated ramp, 2H sweep.



**Figure 12.** Differential phase of 5° on vectorscope.

# "The neer, owner resident were

Bob Liftin Engineer, Owner, President Regent Sound.

The PCM-3324 Digital Audio Multi-Channel Recorder is the first Sony product to incorporate the DASH format.
So it can interface with already existing equipment and will be compatible with future developments in audio.
And its reputation is spreading fast for being a

well-built, well-designed piece of machinery.

Or, in the words of Mr. Liftin, "I took it out of the crate, set it up and got it running. And my coffee was still hot."

We couldn't have said it better **SONY.** ourselves. Professional Audio

© 1986 Sony Corporation of America. SONY is a trademark of Sony.

To measure  $d\theta$  on a vectorscope, increase the gain control until the vector dot is on the edge of the graticule circle. Use the phase shifter to set the vector to the 9 o'clock position. Phase error will appear as circumferential elongation of the dot. The vectorscope graticule has a scale marked with degrees of dO error. Figure 12 shows a do error of 5°.

More information can be obtained from a swept R-Y display, which is a feature of waveform monitor and vectorscope systems. If one or two lines of demodulated video from the vectorscope are displayed on a waveform monitor. differential phase appears as tilt across the line. In this mode, the phase control




Figure 13. Differential phase of 5° on waveform monitor.

should be adjusted to place the demodulated video on the base line. which is equivalent in phase to the 9 o'clock position on the vectorscope. Figure 13 shows a d⊖ error of 5°; the amount of tilt is measured against a vertical scale

This mode is useful in troubleshooting. By noting where along the line the tilt begins, it is possible to figure out at what dc level the problem starts to manifest itself. In addition, field-rate sweeps enable the operator to look at do over the field.

A variation of the swept R-Y display may be available in some instruments for precise measurement of differential phase. Highly accurate measurements can be made with a vectorscope that has a precision phase shifter and a doubletrace mode. This method involves nulling the lowest part of the waveform with the phase shifter, then using a separate calibrated phase control to null the high end of the waveform. A readout in tenths of a degree is possible.

# Non-linear distortion: differential gain


Differential gain (dG), another nonlinear distortion, refers to a change in chrominance amplitude with changes in luminance level. That is, the vividness of a colored object will change when the brightness of the scene changes. The modulated ramp or modulated staircase is also used to evaluate this impairment. Again, make the measurement on signals with different APL levels.

To measure differential gain with a vectorscope, set the vector to the 9 o'clock position and use the variable gain to bring it to the edge of the graticule circle. Differential gain error appears as a lengthening of the vector dot in the radial direction. The dG scale at the left side of the graticule can be used to quantify the error. Figure 14 shows a dG error of 10%.

Differential gain can also be evaluated on a waveform monitor by using the chroma filter and examining the amplitude of the chrominance from a modulated staircase or ramp. Put the waveform monitor in 1H sweep and use the variable gain to set the amplitude of the chrominance to 100IRE. If the



Figure 14. Differential gain of 10% on a vectorscope.

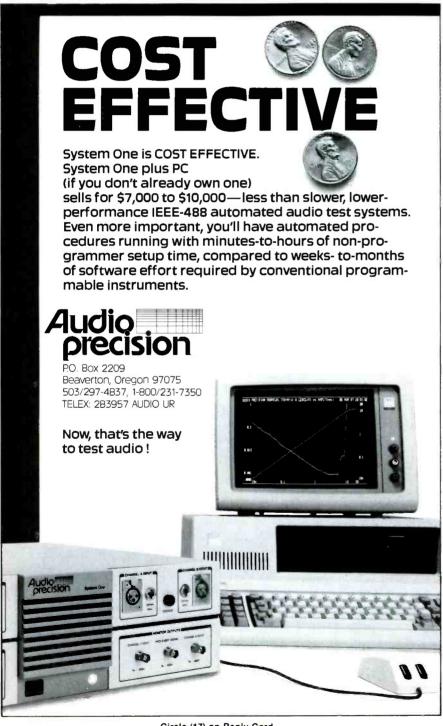

Circle (17) on Reply Card

# THE FIRST INTELLIGENT BROADCAST COLOR MONITOR



BARCO INDUSTRIES' new CVS professional broadcast monitor is microprocessor-based to make it intelligent in operation and easy to use.

It has both a digital and an analog bus for maximum flexibility. P us four "open" slots that let you plug in today's options and those yet to come. As new features do come along, you'll be able to add them through software - no hardware changes!

All CVS functions are controlled from the front of the monitor or from a remote keyboard. An optional master remote permits control of a series of monitors.

WE PUT THE FUTURE IN THE PICTURE.



You can also store, and automatically call up, either calibrated presets or your own preferred presets.

Like our best master control monitors, the CVS has Automatic Kinescope Biasing (AKB) to maintain color and black level stability.

The CVS also generates more internal test patterns than any other monitor. They include white field, cross hatch and color bars.

The CVS is available in both 14 inch and 20 inch versions, and provides outslanding picture quality in any TV standard.

For complete specifications, contact your local BARCO INDUSTRIES Dealer or BARCO INDUSTRIES, 170 Knowles Drive, Suite 212, Los Gatos, CA 95030. Phone: (408) 370-3721.

BARCO INDUSTRIES is a member of the ACEC-group Circle (18) on Reply Card chrominance amplitude is not uniform across the line, there is a dG error. The reduced chrominance amplitude at the right side of Figure 15 is an example of dG distortion. With the gain normalized




Figure 15. Differential gain of 10% on waveform monitor.

to 100IRE, the error can be expressed as a percentage.

Finally, dG can be precisely evaluated with a swept display of demodulated video. This is similar to the single trace R-Y methods for differential phase. The B-Y signal is examined for tilt when the phase is set so that the B-Y signal is at its maximum amplitude. The tilt can be quantified against a vertical scale.

### K-factor

The lines and small boxes near the top of the waveform monitor graticule are K-factor or quality constant scales. The K-factor system is another means to quantify signal degradation. A series of subjective viewer reaction tests generated data that correlated the relative degradation of the picture to a measured amount of all the distortions observed on a sine<sup>2</sup> pulse-bar signal. From the results of those tests, the K-factor established quality standards for TV signals from slight to severe picture degradation.

The K-factor markings line up horizontally with the pulse-bar portion of the FCC composite signal when the waveform monitor is set for a 1H sweep. The dashes and solid lines on the graticule represent  $\pm 2\%$  and  $\pm 4\%$  K-factor, respectively. A 5% K-factor distortion is said to be detectable by skilled observers, while 3% is not noticeable.

# ICPM

Modern TV receivers use a method known as intercarrier sound to reproduce audio information. Sound is recovered by beating the audio carrier against the video carrier, producing a 4.5MHz IF signal, which is, in turn, demodulated to produce the sound. From the interaction between the audio and video portions of the signal, certain distortions in the video at the transmitter can produce audio buzz at the receiver. Distortions of this type are referred to as incidental carrier phase modulation or ICPM.

The advent of stereo audio for televi-


sion has increased the importance of measuring this parameter at the transmitter, because the buzz is more objectionable in stereo broadcasts. It is generally suggested that less than 3° of ICPM be present.

ICPM is measured with a high-quality demodulator with a synchronous detection mode and an oscilloscope, operated in a high-gain X-Y mode. Some waveform and vector monitors have such a mode. Video from the demodulator is fed into the Y input of the scope and quadrature out is fed to the X input terminal. Low-pass filters make the display easier to resolve.

An unmodulated 5-step staircase signal produces a polar display, which is shown in Figure 16, on a special graticule developed for this purpose. Note that the bumps all rest in a straight vertical line, if there is no ICPM in the system. Tilt indicates an error, as shown in Figure 17. The graticule is calibrated in degrees per radial division for differential gain settings. Adjustment, although not measurement for the error, can be done without a graticule.



Figure 16. A waveform display showing no ICPM distortion.



**Figure 17.** A waveform display showing 5° ICPM distortion.

### And so on...

This discussion of capabilities of waveform and vector monitors is by no means all-inclusive. Special test signals and measurement techniques have been developed to evaluate chrominance-to-luminance delay, group delay and many other parameters. Some instruments have the capability to look at SC/H phase. Instructions for performing these measurements and more detailed infor-

mation on techniques already discussed can usually be found in your monitoring equipment manuals.

# An effective test plan

Waveform and vector monitors are useful instruments, but the effectiveness of test and measurement procedures depends heavily upon the people who operate them. Someone must decide which parameters need to be evaluated and what the acceptable limits are for each one. Someone must select the test equipment initially. And finally, someone must be responsible for making those measurements on a routine basis.

Whether these functions are performed by one person or by members of a large staff, their judgment is important. There are no hard and fast rules, no pat answers. Technical people involved in television are always trying to get the best picture for the viewer while staying within a budget and meeting FCC requirements. In spite of this common goal, each facility will have different test and measurement requirements.

The first concern, and probably the most difficult one, is deciding what to measure and how much error to tolerate. Most facilities will want to make the checks discussed in this article, but it is impossible to generalize much further. Deciding on acceptable limits is not easy. Is 5° of dG too much? It may be perfectly acceptable for a transmitter site, while a dG of 1° may be objectionable in the studio. The operators of each facility must decide for themselves and it is, therefore, a good idea to learn how various impairments affect the picture.

The choice of test and measurement equipment is usually based on the feature set required, the cost, and personal preferences of the operators. When only a few models were available, a clear line could be drawn between monitoring equipment and measurement equipment. Although some instruments are still clearly one or the other, that line has blurred considerably in recent years. Many newer models fall in between. making it necessary to analyze the instruments feature by feature to find the best fit. Keep in mind the experience and technical skills of those who will operate the equipment most frequently, and try to find an appropriate user interface.

Finally, make sure that all of the checks and setup procedures are performed regularly by a competent operator. Good equipment and a welldefined system checkout procedure will be effective only if they are used. The person performing the check must be able to recognize when something is wrong, even if someone else must be called to fix the problem. A good waveform monitor and vectorscope, when combined with some basic skills on the part of the operator, can help achieve the goal of delivering consistently high-quality video. 1:(:-)))]



David Peters, Assistant Engineer KGLT Radio Station, Bozeman, Montana.

# THE EIMAC 5CX1500B FOR LONG LIFE, QUALITY AND ECONOMY

Varian EIMAC has been in the business of broadcasting for over 50 years, producing durable, reliable and long-lasting tubes that a non-profit radio station like KGLT in Bozeman, Montana, can afford,

# Longevity

KGLT engineers use the EIMAC 5CX1500B tube in their transmitter, reporting a life span of 18-19 months-approximately 13,000 hours of service!

# **Quality and Savings**

This would be impressive under ideal conditions, but KGLT operates under rugged and adverse mountain-top conditions. Just as important is the 40% cost

savings attributable to the 5CX1500B's extended life.

In FM broadcasting, EIMAC tubes are customer-proven.



EIMAC's 5CX1500B broadcasting tube in KGLT radio station's transmitter.

Circle (19) on Reply Card

Varian EIMAC offers a 5,000hour warranty on 5CX1500B tubes.

For more information, contact:

Varian EIMAC 1678 South Pioneer Road Salt Lake City, Utah 84104 Telephone: 801-972-5000



This September, Panasonic will deliver the 1/2" format that's every inch a broadcast quality system.

MI

Panasonic introduces the M-II format. It's the first metal particle cassette-based system with features that allow single-format broadcasting from field pickup right through editing and on-air broadcast.

One format, one system. M-II single-format capabilities eliminate the time, cost and performance degradation of format conversion. So the same compact ½" cassette that's used in the field can be loaded right into the studio recorder or cart machine.

Advanced component analog design. With the introduction of M-II, the broadcast industry finally has a component format that will set a design standard throughout the world.

1" picture quality on ½" cassettes. By using separate heads, independent recording tracks and metal particle tape, M-II's performance rivals that of the 1" C Format even through multiple generations.

**Four-channel audio.** Delivered with provisions for stereo as well as high-fidelity audio.

**90-minute recording and playback.** M-II's cassette provides up to 90 minutes of operation. Compare that to the conventional 20-minute cassette, and you'll find yourself shooting four times longer before having to stop to reload. And M-II plays back four times longer in the original format.

Full editing capabilities. Whether it's video and audio editing, audio split editing, automatic pre-roll or speed trimming for matched frame edits, M-II is the one for all.

**System interfacing.** Standard edit control interface and video signal format combine to enable ready connection with virtually all systems in use today.

**Ideal for automation.** M-II can be used in cart machines and program delays for automated down link recording.

Panasonic reliability. Recognized as a leader in professional electronics, Panasonic performance and dependability are at the heart of the M-II system.

**Built-in economy.** No expensive format conversions or extra space required for extra equipment makes M-II an investment that will pay for itself.

To discover the ½" format that's about to turn all others into recorded history, call 1-201-348-7671. Or write: Panasonic Broadcast Systems, One Panasonic Way, Secaucus, NJ 07094.

#### Panasonic Broadcast Systems



# Sync processing and and distribution

By Michael Guess

### The most critical aspect of teleproduction facility design is system timing.

Without sync and timing information, a video signal will produce nothing but gibberish on the CRT. Even with scrambled signals, the remnants of normal timing information are present, although they may be encoded as data. As long as a means to reconstitute sync at the display exists, television works.

#### Video basics

Light passing through the optical system creates a pattern of electrical charges on the target of the camera pickup tube. Inside the tube, an electron beam scans the target to complete an electrical circuit through the charges on the target. A varying density of electrons, which represents the light and dark pattern, flows from the target to form the video signal.

To accurately reproduce the scene, scanning must occur in an organized way. In the camera and TV receiver, an electron beam scans across the target and CRT screen, moving horizontally. At the same time, the electron beam gradually moves downward. Once it reaches the bottom, the beam returns to the top of the screen.

A complete picture contains 525 lines, scanned alternately or *interlaced*. During the first pass, the beam scans odd-numbered lines; during the second pass, even lines are traced. Each scan or pass of the scene is a field of 262.5 lines; two fields form a frame. Because fields are scanned in a rapid sequence of 60 per second, the viewer perceives the illusion as a completed picture.

#### Sync basics

To create a picture, the camera and

Guess is a marketing specialist for Grass Valley Group, Grass Valley, CA. This article was adapted from the GVG publication, NTSC Studio Timing: Principles and Applications. receiver must be synchronized, scanning the same part of the scene at the same time. As the beam reaches the right end of a horizontal line, it returns to the left side of the screen. Called horizontal retrace, the return is coordinated with the horizontal sync pulse. Similarly, after 262.5 lines are traced, the beam returns to the top, signaled by the vertical sync pulse. During retrace times, blanking turns the beam off, so that nothing is picked up by the camera tube or written on the TV CRT screen.

Each line of video contains a *horizon-tal blanking period*, which includes the sync pulse and reference color burst. In

the vertical sync interval, however, normal horizontal information is deleted. *Equalizing pulses* are used instead to cause video fields to begin at the proper points for interlace. *Vertical serrations* keep the horizontal sync circuitry from drifting away from the correct horizontal frequency.

#### System basics

To mix video signals, all signals must arrive at the video mixer, or central combining point, synchronously. That is, the scanning sequence of every source must start, and stay, in time. Otherwise, the picture will roll, jump, tear and/or have

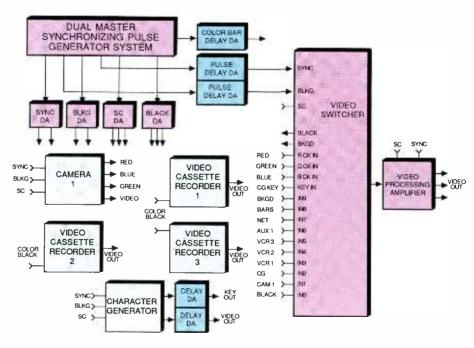


Figure 1. A small video production system using cumulative delay to achieve system timing.

# EIGHT QUESTIONS YOU SHOULD ASK WHEN BUYING WEATHER RADAR.


Where does the data come from? The National Weather Service is now fully operational with a series of radar transmitters called RRWDS: it's their primary precipitation detection tool. The Alden C2000R is the color radar display system which allows its subscribers to access any of these RRWDS transmitters, on a direct line or dial-up basis.

## 2. What if I only want three or four sites?

With the Alden system, there's no need to pay for access to the whole country if you only need data from a few radars. You specify the sites you want, and we program your auto-dialer phone to receive these sites. You pay only for the sites you need.

Will I get busy signals?
Probably not. The system is designed so multiple users can call simultaneously. And because we know who has access to each radar, we can expand the system as subscribers increase.

**What about service?**• Of course the transmitters are maintained by on-site government technicians. And for Alden equipment, we maintain a nationwide

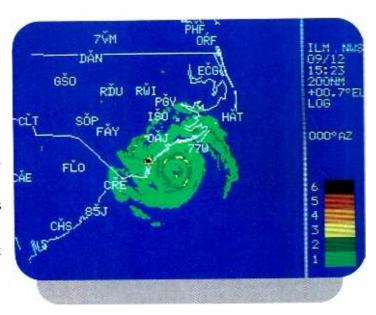

service network for reliable operation.

**5.** What features are included? The Alden C2000R has a number of built-in features that are costly options in other radar display systems. Zoom, range rings, sweep line, NTSC/RGB

Alden Electronics, 127 Washington Street, Westborough, MA 01581, (617) 366-8851		
	nformation on:	□ C2000R/S
Name		
Title		
Company		
Street		
City	State	Zip

compatibility, time lapse and level flashing are included in the standard C2000R. And there's no hookup charge to connect to any radar.

6. Are there options?

You can add additional memory, clutter blanker, alarm, customized backgrounds—even a high-resolution printer for color print or transparency. And for a surprisingly small additional cost, you can convert the C2000R

to the C2000R/S, which lets you receive color weather graphics from private data bases.

**7.** Can we afford it?

The Alden C2000R is far less expensive than other similarly equipped radar display systems. If you don't need all the features of the C2000R, the cost is even less for our C2000M radar monitoring system. If you've looked at weather display systems in the past, you will be pleasantly surprised at the cost, lease or purchase, of an Alden system.

How do I find out more?

Just fill in the coupon, or call Alden, and we'll be happy to set up a demonstration.

Add weather graphics capability at a surprisingly low cost with our C2000R/S



Circle (21) on Reply Card

incorrect colors as the signals are combined. Careful system timing assures that all video signals at the input of the video switcher are synchronous.

The *sync generator* provides a reference by which all events and/or signals are timed. Establishing and maintaining precise timing involves a number of variables.

Defining advance or delay between video signals requires that one signal be defined as a reference. Advance (or negative time delay) is not possible, but with video frame synchronizers, video advance appears possible. In reality, the synchronizer introduces a delay to achieve an apparent advance.

#### Planning basics

In facility design, timing requirements must be defined according to information on equipment specification sheets. Most modern source equipment locks to color black with an integral sync generator. Timing adjustments in the local generator must have sufficient range to meet system requirements.

Not all equipment can lock to color black. Some older video devices require separate horizontal and vertical drive pulses to synchronize scanning circuits. Sync, blanking and subcarrier are normally necessary. All of these drive pulses must be timed according to the path length of the reference video device.

Normally the device with the longest path length is taken as the reference device. Delays are then introduced in all other devices through coaxial cable or equivalent lumped delay lines.

Two approaches prevent excessive lengths of delay cabling. Delay lines may be used, either as variable or fixed delay amounts. A more flexible method is to use a source synchronizing generator to drive a video source. This secondary generator locks to color black from the master sync generator. Adjustments to the secondary unit allow the source to be properly timed.

Most production switchers require sync, blanking and subcarrier. Some have a limited adjustment range of horizontal delay, but require advanced pulse drives. Subcarrier phasing is typically an integral adjustment for color timing of the switcher.

#### Delay basics

Video, pulse and subcarrier distribution occurs through coaxial cable. Coax has an inherent delay of approximately 1.5ns per foot, depending upon the type of cable used. The amount of delay must be considered in the system design. Although the amount of coaxial delay may be desired, coax introduces frequency response losses that increase with cable length and signal frequencies.


Distribution amplifiers introduce inherent delays that vary with the model and range from 25ns to 70ns. Cable equalization adjustments will also affect delay, suggesting that equalization must be set prior to system timing. DA delay adjustments often include bandwidth compensation and are superior to coax or passive delay lines. Some pulse DAs allow adjustment of up to  $4\mu s$  and include pulse regeneration circuits to eliminate distortion.

Processing amplifiers have a fixed electrical length, even when regenerated sync and color burst are adjustable. Switchers also introduce a path length delay. Particularly in multiple control facilities, these delays must be considered when the system is designed.

If a device feeds two or more switchers, lines going directly to the final switcher must include an additional delay equal to the electrical length of switchers or other devices that also feed the final switcher. The length of switcher systems may vary from 50ns for small routers to 700ns for large production systems. Rather than cable delays, automatic delay DAs or isophasing amplifiers can correct errors of up to  $\pm 15$ ns. Multiple channels, each with several outputs, will maintain a subcarrier phase accuracy to within 1°.

#### Example one


There are two methods by which timing can be achieved. One accumulates delay. The second uses secondary sync generators to achieve time coincidence.

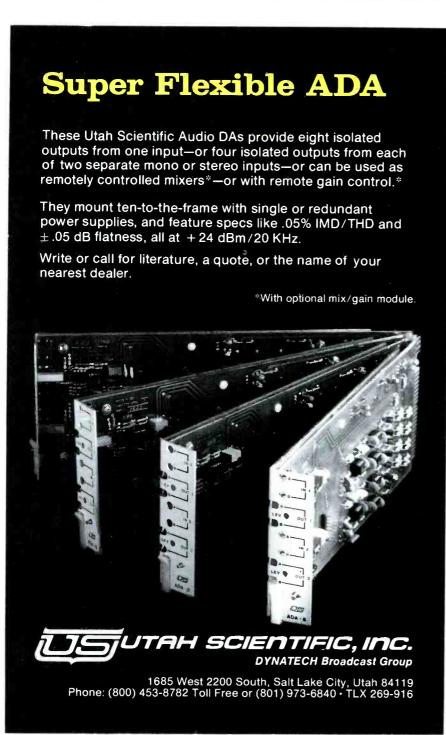

#### BY POPULAR DEMAND - ANOTHER "48 SPECIAL"

## **EVOX** PR99 Limited to Hi-Speed Model 13506 7.5/15 ips ONLY!

We have only 48 to sell at a special price. Which one do you want us to reserve for you?

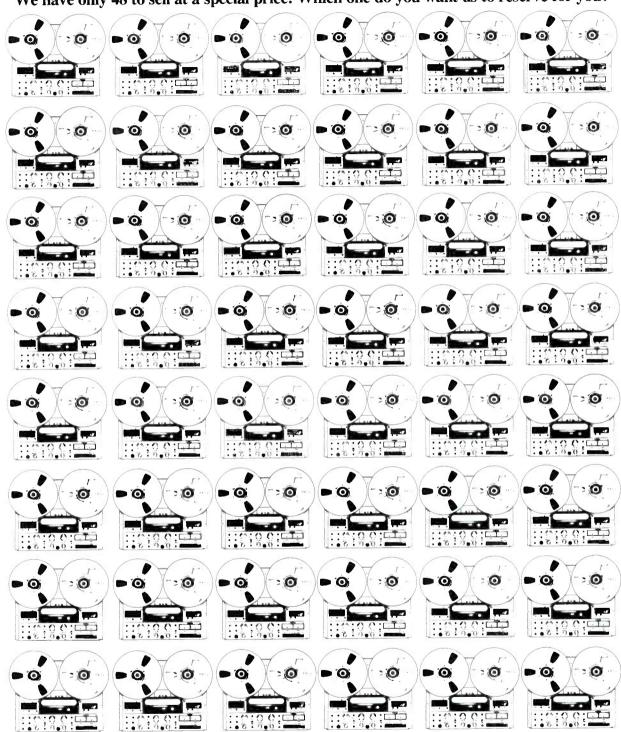

#### CALL WITH YOUR ORDER TODAY!

ATLANTA, GA (404) 964-1464

(818) 843-5052

CHICAGO, IL (312) 794-0224

DALLAS, TX (214) 423-8667

RICHMOND, IN LOS ANGELES, CA (317) 962-8596

SEATTLE, WA (206) 838-2705 **Broadcast Equipment** P.O. BOX 1487 • RICHMOND, IN 47375

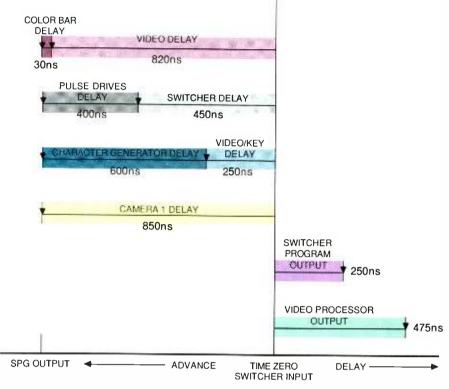


Figure 2. Timing requirements of equipment in Figure 1, plotted relative to time zero at the switcher input.

Consider a small system with cumulative delay. (See Figure 1.) One camera, one character generator and three VCRs—each with a TBC—make up the system. Each TBC is synchronized with color black from the master sync generator and includes timing adjustments for the VCRs.

Video sources to be mixed, keyed or used in multiple source effects must be exactly in time at the switcher input. In this example, the switcher input is designated as the zero timing point. (See Figure 2.) Now assume the camera to have 850ns delay from its composite sync input to its composite video output, representing the longest signal path in the system. Signals from the sync generator will drive the camera directly.

To sync the camera with switcher black or a color background generator, sync and blanking drives to the switcher must be delayed by 400ns with adjustable delay DAs. The switcher subcarrier control handles subcarrier phasing.

Bringing the character generator into time may be accomplished through delayed drive pulses or in the video and key outputs of the character generator. The system shown in Figure 1 uses video delay DAs for the video and key outputs. This arrangement provides both timing and multiple outputs.

The color-bar source is integral to the sync generator. Because the delay

## You provide the vibration









## The Schwem Gyrozoom® 60/300 will stabilize it









One of the torture tests we gave the Schwem Gyrozoom 60/300 Image Stabilizer Lens was an improvised dolly shot using an ordinary office chair. The chance you'll ever want to do that is remote. Still, it's nice to know it's possible.

You're more likely to use the Schwem Gyrozoom 60/300 for conventional handheld applications like snowmobiles, toboggans and skydiving. Or even boats, motorcycles and golf carts. In fact, almost anywhere that vibration threatens to ruin the shot. The Gyrozoom 60/300 fits most ½3" ENG/EFP cameras and eliminates virtually all image vibration.

Consider the creative possibilities. Tripod quality images on location because practically anywhere you can put a camera you can stabilize the image with a Schwem Gyrozoom 60/300.

Call Schwem today for a free demonstration. (800) 228-1333-242 or (415) 935-1226. 3305 Vincent Road, Pleasant Hill, CA 94523.














#### **INNOVATIVE & AFFORDABLE** SYSTEMS ENGINEERING

- Production Facilities
- Broadcast Facilities
- Mobile Systems

CENTRO CORPORATION, (619) 560-1578, 9516 CHESAPEAKE DRIVE, SAN DIEGO, CALIFORNIA 92123 See Us at RTNDA Booth #319

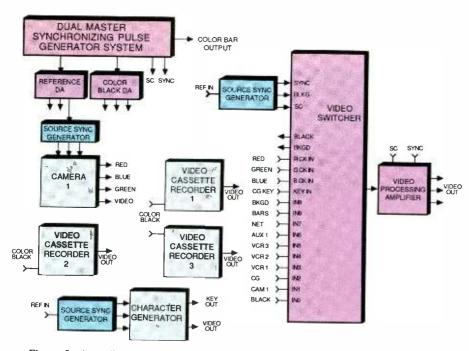

**Figure 3.** A small video production system using source synchronizing generators to achieve system timing.

through the bar generator is only 30ns, 820ns delay must be introduced in the bar signal between the generator and switcher input.

Drives for the video processing system come from DAs feeding the switcher. Integral adjustments in the proc-amp have sufficient timing range for both sync and subcarrier.

#### Correcting color phase

If the master sync generator is SC/H phased, a specific relationship exists between the leading edge of the horizontal

sync pulse and the zero crossing of subcarrier. Ideally, an SC/H phase meter is available to adjust the camera encoder. Phasing can be done without a meter, however.

First, the leading edge of the color bar and camera sync pulses are adjusted for coincidence with the color-bar delay DA. Then the camera subcarrier phase is adjusted to match that of the color bar.

The switcher color background and camera sync and blanking are timed, followed by a subcarrier adjustment with the switcher phasing control. The character generator and titling key outputs are also set with reference to the camera sync and subcarrier, followed by adjustment of TBC controls for the VCRs.


#### Example two

In the simple system described previously, master and source sync generators are replaced by delay units to simplify SC/H phasing (see Figure 3). Color black drives each TBC/VTR. A reference DA provides sync information to the source sync systems for the camera, titler and switcher. The master generator also provides a color-bar signal.

Each device is SC/H phased to its source sync generator. Then, only adjustments to the secondary generators are needed to achieve total system timing. The camera is advanced by 850ns.

## PACO Ni-Cad BATTERY PACK

## PACO HIGH POWER CELL GIVES YOU:

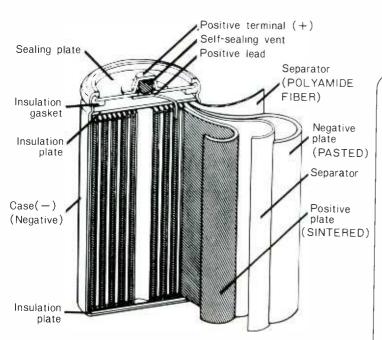

- ■HIGH POWER OF 4.4Ah(1C RATE)
- ■NO INTERNAL SHORT CIRCUIT PROBLEMS
- ■DEPENDABLE CONSISTENCY AND LONG LIFE

#### PACO PRODUCTS

 BATTERY PACK
 DP-1240(12V4.4An)
 (DIRECT REPLACEMENT FOR SONY BP-90)

● QUICK CHARGER KD-220

BATTERY DEMEMORIZER
 KD-120







\*\*AVAILABLE SOON DP-11(13.2V1.7Ah)DIRECT REPLACEMENT FOR SONY NP-1

## PACO ELECTRONICS U.S.A., INC.

714 WEST OLYMPIC BLVD., SUITE 706, LOS ANGELES, CA 90015 TEL-213-747-6540 / TLX-756923 / FAX-213-747-3731

Circle (26) on Reply Card



## YOU TALKED AND WE LISTENED

The Centro NETWORKER is the result of extensive research into your network news requirements.

- Unparalleled Centro quality in an attractive affordable package.
- Available in a rugged standard package with many options for your specific requirements.
- 2.3 meter dish with 49.5 Dbi gain and selectable-adjustable vertical and horizontal polarization from inside the vehicle.
- Three year unlimited mileage, limited chassis warranty and serviceable in over 4,500 locations throughout the United States.
- Engineered, designed and constructed to meet your most demanding Satellite News Gathering requirements.




CENTRO CORPORATION

9516 CHESAPEAKE DRIVE SAN DIEGO, CALIFORNIA 92123

(619) 560-1578

See the NETWORKER at RTNDA Booth #319

Circle (27) on Reply Card

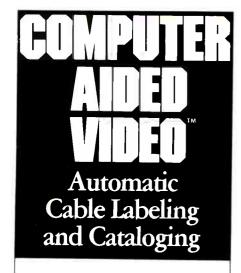

If you have ever had to label a few hundred cables, you know what a time-consuming and irritating job it is. No more.

Whenever you add, replace, or change a cable in your system, Comprehensive's CABLETRAK™ software automatically prints out labels for both ends of the cable and updates your cable inventory.

CABLETRAK™ will also tell you what cables are attached to a particular piece of equipment, their wire type, length, and any notes you may have made.

If you are building a studio, CABLETRAK™ will print out sublists for your installation crews.

If you don't have time to label and keep track of every cable in your system, let CABLETRAK™ do it for you.

For more information call Comprehensive toll-free at 1-800-552-2CAV.

#### **CABLETRAK**<sup>TM</sup>





148 Veterans Drive Northvale, New Jersey 07647 (201) 767-7990

Circle (28) on Reply Card Broadcast Engineering July 1986

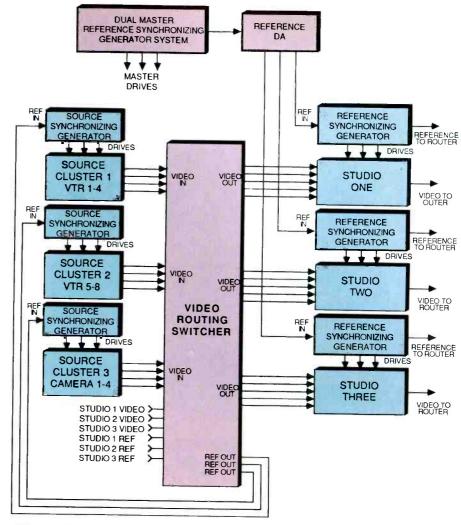


Figure 4. Application of source synchronizing generators allows flexible source-cluster and studio timing for any interlinking of facilities.

Appropriate sync advance times for the titler and switcher are made with separate secondary sync units.

The reference signal can be color black or encoded subcarrier. By using encoded subcarrier, a continuous sine wave of 3.579545MHz avoids jitter that might result if the reference were always regenerated from the short burst signal. Group delay, which results when several frequencies pass through coax cable, does not occur with the single frequency. Inverting two cycles of subcarrier during field one of color frame one provides positive color frame identification for the source generators.

#### Complex systems

Several systems, such as that of example two, can be combined into a multiple studio complex. In this case, a master reference sync generator drives reference sync generators, which in turn control source sync units. Each studio has access to a cluster of video sources as well as other router-assignable sources. All clustered sources are timed together. (See Figure 4.)

An output reference signal from each studio provides a key to time any cluster of equipment assigned to that studio. At the same time, a studio and its cluster of sources may become a source for another studio. Through a phase preset system, an assortment of equipment configurations may be stored and recalled.

Designing a complex studio facility in this manner has advantages. First, sync system redundancy avoids total system failure, which can occur even with dual generators and auto-changeover. Each level of the sync hierarchy is protected, because loss of a reference drive causes individual generators to go to a freerunning mode. The second advantage is that additional sources may be integrated into the system without requiring a major redesign.

#### Planned success

As the complexity of TV production increases, the combining of local and remote sources with effects, stills and tape becomes more prevalent. In order to create effective video without chroma phase and horizontal luminance shifts, proper timing is essential. Only with careful planning of the timing network can complex systems be made workable.

#### The Abekas A53-D Digital Special Effects System

The innovative tradition of Abekas continues with the A53-D-the most cost-effective, high-quality three-dimensional effects system available today.

In single or dual channel configuration, the A53-D gives you a full array of three-dimensional features. These include: perspective and 3D rotation, variable rotation axes and 3D locate, field/frame freeze and full manipulation of frozen pictures, variable border and background, crop and aspect change, A/B switching and GPI control, and smooth linear motion and trajectory with variable tension.

The A53-D makes good sense for both live broadcast and post-production applications. For broadcasting, the A53-D offers a simple-to-use control panel with fast access to 24 on-line effects. For post-production, the system's extensive programming features and precise control let you create intricate effects limited only by your imagination.


You can digitally interface the A53-D to the highly acclaimed Abekas A62 digital disk recorder. This unique duo gives you the ability to composite unlimited layers of manipulated video without generation loss.

Let the A53-D add a whole new dimension to your bottom line. with unmatched price and performance. For details, contact: Abekas Video Systems, Inc., 353A Vintage Park Drive, Foster City, CA 94404 (415) 571-1711.

## Abekas

Now Anything is Possible

Circle (29) on Reply Card

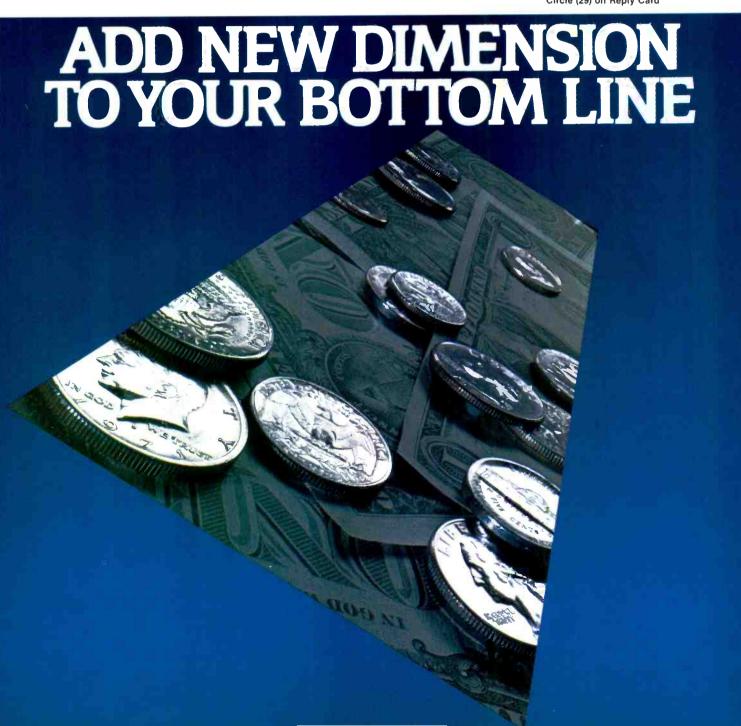

## Understanding C/H

By David Jurgensen

When sync and subcarrier are properly adjusted, quality live and edited video productions become a matter of course.

Controversy surrounds SC/H phase, but until someone finds another method to determine color frame, the confusion probably will continue. Just what is SC/H phasing? Why is it necessary? How does it relate to color framing? This article looks at the subject of SC/H (subcarrier to horizontal) phase in terms of three areas of interest: the SC/H phase and color frame of the signal, the monitoring equipment and the input detection of color frame by gen-locked equipment.

#### Color framing

The sync-to-subcarrier relationship, vertical sync and the number of lines per field determine a 4-field sequence for the NTSC system. (In PAL the SC/H relationship defines an 8-field sequence.) The horizontal sync in NTSC is related to the color subcarrier by a factor of 455/2. This gives 227.5 subcarrier cycles between horizontal sync pulses. The same phase of subcarrier, or burst, with respect to sync repeats every other line.

Because there are an odd number of lines (525) in two fields, and the subcarrier-to-sync phase is a 2-line sequence, the first two fields are different from the second two fields. That is, the phase of burst with respect to sync will be different on a particular line of the first two fields relative to the same line of the next two fields. This results in the 4-field sequence. When combining signals, the appropriate fields (one of four) must be identified and matched. Matching of color fields between two signals is called color framing.

Field one of the 4-field sequence can be identified by measuring the phase of

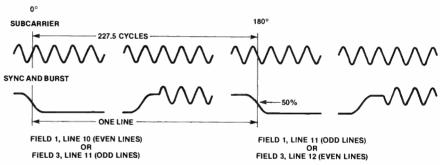



Figure 1. Determining SC/H phase through subcarrier countdown to sync.

burst relative to the leading edge of sync (SC/H phase) on a selected line or lines. The proposed RS-170A standard (1977) specifies the relationship on line 10, field one to be 0° phase. Figure 1 shows the relationship between sync and subcarrier and indicates the correct phasing for field one vs. three on selected lines.

Field one or three vs. two or four is determined by the vertical sync. (In PAL, the 2-field sequence can be identified by the vertical sync; the 4-field sequence by the V-axis switching of burst; and the 8-field sequence by the SC/H phase relationship.)

There are several difficulties in determining color frame without SC/H phase and color frame monitoring equipment. Some of these are that:

•Sync and burst do not occur on the

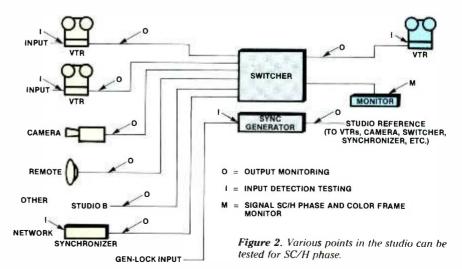

Jurgensen is director of engineering for Magni Systems, Beaverton, OR.

## Realistic reverb at a realistic price.



And not just reverb, but a full range of studio effects. All very controllable. All in the new Yamaha REV7 digital reverb. And

all for only \$1,395.\*

How did we do it? By analyzing the early reflections and subsequent reverberations of actual environments to see what gives reverb its natural character and richness. And then using specially developed LSIs to handle this immense amount of information and the high processing speeds required to effectively simulate natural reverb.

The REV7 has 30 factory preset programs permanently stored in its ROM. These presets include large and small hall, vocal plate, gated reverb, reverse gate, early reflections and stereo effects such as chorus, flanging, phasing and echo.

And each of the presets incorporates up to seven user-programmable parameters which can be edited and then stored

in RAM.

For even greater realism, you can alter the reverb time of the HI and LOW frequency ranges in proportion to the MID range (RT60) and simulate the dampening qualities of absorptive materials in a room. So the sound can be as live or as dead as you want.

Programming is easy because of the REV7's logical front panel layout which gives you instant access to all functions and

the LCD readout panel which tells you at a glance the name of the program and the edit parameter selected.

So besides the 30 presets, you can store up to 60 of your own programs in the REV7's RAM. All available for recall from the front panel or the hand-held remote.

The REV7 features electronically balanced XLR input and output connectors. And balanced TRS phone jacks which will accept standard phone plugs. Both stereo and mono inputs can be connected producing, in either case, a simulated stereo reverb output.

There's even a three-band semi-parametric EQ so you can fine-tune the sound of your reverb to work in any environment. And, of course, MIDI compatibility.

Realistically speaking, there's no finer digital reverb at the price on the market today than the REV7. Available now at your Yamaha Professional Audio dealer.

For a catalog explaining all the features and capabilities of the REV7 digital reverb, write: Yamaha International Corporation, Professional Audio Division, P.O. Box 6600, Buena Park, CA 90622. In Canada, Yamaha Canada Music Ltd., 135 Milner Ave., Scarborough, Ont. M1S 3R1.

\*Suggested U.S.A. retail price. Prices will vary in Canada.



signal at the same time.

•The phase of sync with respect to burst may not be exactly 0° or 180° (SC/H phase error).

 Correctly identifying field one of the 4-field sequence on each of two different signals doesn't ensure that the relative color framing is correct. These field identifications are relative to themselves. Because there may be delay differences

between signals, correct color framing can be determined only when comparing one signal to another or to a reference. It should be possible to make this comparison with up to 1/2-field delay difference between signals.

 Timing jitter may not allow phase lock or trigger circuits to follow SC/H phase. Color frame cannot be identified without accurately determined SC/H phase.

#### Studios and SC/H phasing

There are a number of areas in the studio where SC/H phase and color frame monitoring are important. Some of these are shown in Figure 2. Other points are shown that may require testing for correct color frame input detection.

It is important that the SC/H phasing of the studio reference signal is correct. An offset of the studio reference SC/H phase may cause offsets in other equipment locked to that reference.

Color framing becomes critical when signals are to be edited. If a signal is not color framed, the VTR may not accept the edit or there may be a disruption in the signal if the edit is accepted.

Color framing is also important in switchers. Burst phases have to be matched to avoid color shifts during a switch. If burst phase is matched but color frame is not, sync will be off by ½-subcarrier cycle (140ns). This offset will cause a horizontal jump in the picture as the signals are switched.

#### VTRs and SC/H phasing

Two of the more commonly used videotape recorders in the studio today are the type C reel and the U-matic cassette formats. Among many other differences, these VTRs also process the signal differently.

Type C machines process color and luminance together, so that color framing and SC/H phase can be measured throughout the VTR video path. Editing will be inconsistent if SC/H phasing is incorrect, or edits may be locked out if color framing is in error.

There are three points to check; the input, the demod output and the TBC output. Even though the demod output is an important point to check phasing, be aware that many SC/H monitors will not work on this signal because of the inherent VTR time base jitter.

The U-matic videotape recorders separate chrominance from luminance so the two are no longer locked together. The SC/H phase relationship is continually varying. As a result, signals from these VTRs cannot be broadcast directly because the FCC requires chrominance to be coherent to sync (or luminance). A TBC is needed to re-establish or relock chrominance and sync. The SC/H and color framing then becomes important at the TBC output.

#### Defining SC/H phasing

It is important to define and measure SC/H phase, because color framing cannot be determined if the SC/H phase of a signal is too far from 0°. The proposed RS-170A standard specifies that the limits

Continued on page 52



## The alternative to our "double isolation" headsets.

The Shure SM1 and SM2 Headsets isolate you from sound in two exclusive ways.

First, these headsets use extra-large, pillow-soft ear pads for superior noise isolation and comfort. Second, they feature a noise-reducing mic, with a precision cardioid polar pattern, to leave background noises where they belong...in the background. The mic's tailored frequency response insures outstanding voice reproduction.

Other features include: an all-metal boom and double-braced, all-metal headband for greater durability and comfort; a patented boom mount for total mic position flexibility; detachable cable; and a stylish matte chrome and black finish that looks great "on camera".

The SM2 is a dual-ear headset, the SMI — single. For complete information, write or call Shure Brothers Inc. 222 Hartrey Avenue, Evanston, IL 60202-3696. (312) 866-2553.





## THE TEKTRONIX SPG-170A. ITS FEATURES AND VALUE CAN'T BE MATCHED.

Introducing the new Tektronix Master Sync Generator, the SPG-170A. It has the features you need in an RS-170A sync generator... all in an affordable, 1¾-inch package. Just plug it in, set and forget it. You can't do better than that!

All SPG-170A signals are digitally generated to pro-

vide excellent SCH and timing accuracy. Included are digital genlock, high stability internal reference and digitally generated black burst.

With the SPG-170A, outputs are always color framed correctly—regardless of input signal SCH phase.

The SPG-170A's sync timing controls enable you to advance or delay subcarrier and pulse outputs relative to the black burst output. This

eliminates the need for separate delay lines.

Offered as options...an exclusive audio tone output for setting program levels, in addition to color bars with 12 character I.D. and tape leader countdown.

Don't settle for less. Get the full story from your Tektronix representative. Ask for a demonstration and see why we say the SPG-170A's features and value can't be matched!


**Behind the Scenes** in Quality Television.




Tektronix CHAMMETHOLD REFLERGE

Circle (32) on Reply Card

Copyright 1986, Tektronix, Inc. All rights reserved: TZG-066

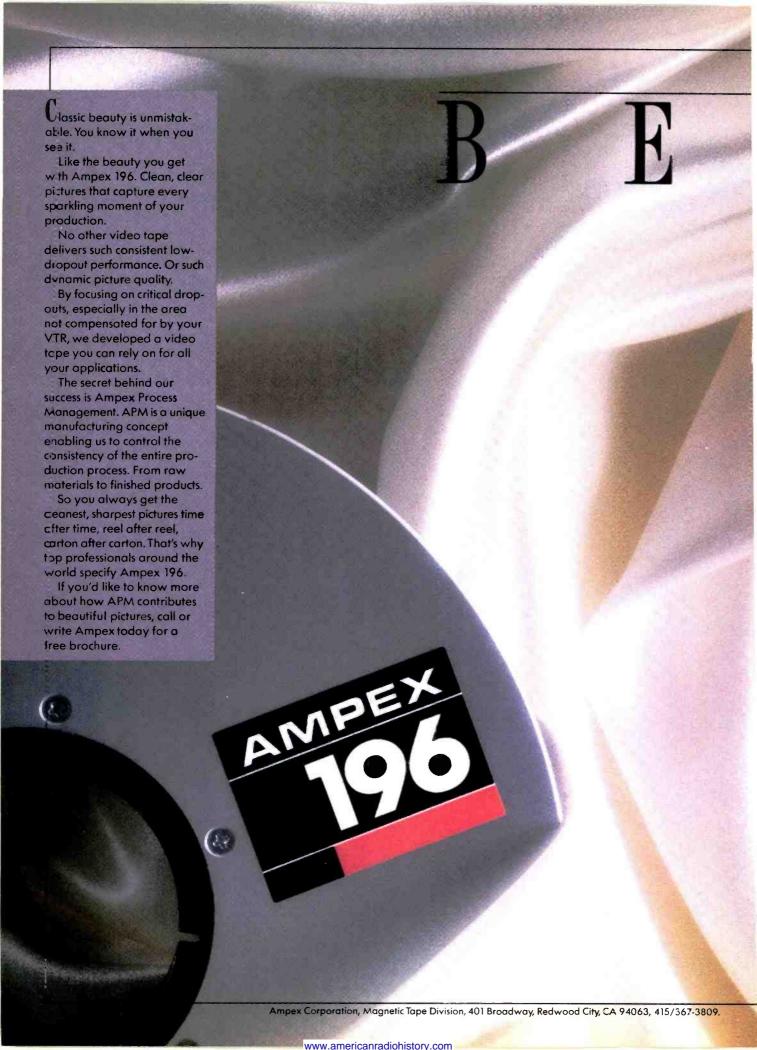

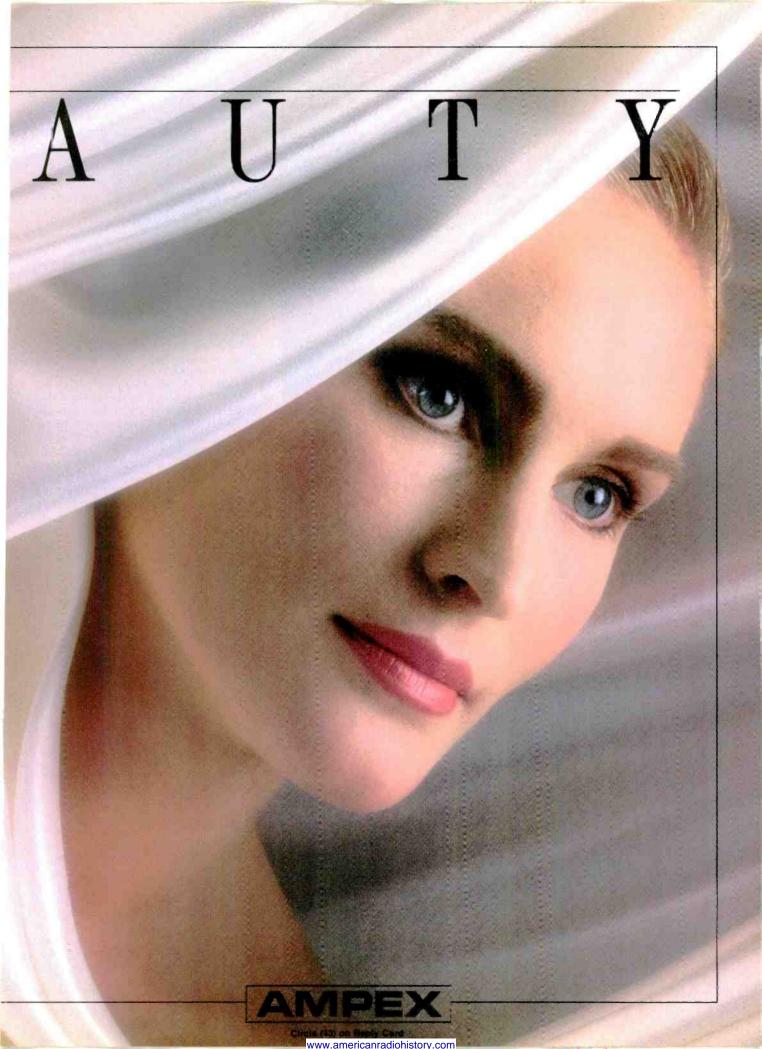

Continued from page 48

on signal SC/H phase should be held to within +40°. This means that the signal sync-to-subcarrier phase should be 0°  $\pm 40^{\circ}$  on one line and  $180^{\circ} \pm 40^{\circ}$  on the next. Line 10, field one, for example, should have a subcarrier-to-sync phase of 0° +40° to make frame detection reliable.

The 40° limit on signals allows equipment input detection to be off SC/H

phase by up to 50° before the indeterminate state is reached at a total of 90°. If the signal SC/H phase were allowed to go to 90°, it would be impossible to determine color frame because 90° is halfway between the two color frames. See Figure 3.

#### Signals with SC/H phase problems

When the SC/H phase of signals is not close to 0° or 180°, color frame detec-




Figure 3. Recommended SC/H phasing of signals falls into the  $\pm 40^{\circ}$  sector to the left of the diagram.

tion circuits in TV processing equipment sometimes give unexpected color framing results. These detection circuits should be able to make the correct determination of color frame as long as the SC/H phase of the input signal is within the recommended  $+40^{\circ}$ . (See Figure 3.)

For a better understanding, consider four examples of different SC/H phase errors that may result in random color frame detection:

#### Example 1:

One input signal is at 0° SC/H phase and the second signal is at 100°. The second signal is in opposite color frame and 80° off from its correct SC/H phase. Figure 4 shows a vector representation of the SC/H phase of the two signals along with an SC/H phase scale.





Figure 4. Frame offset is shown. One signal with correct SC/H falls to the left, while the improperly phased signal appears to the right side of the circle.

An SC/H phase monitor should indicate a framing error with the equivalent SC/H vectors on opposite sides of the vertical axis. Gen-lock detection circuitry should determine that the signals are in different color frames. A frame error may not be indicated, however, if the detection circuitry is in error by only 10° (only 7.5ns timing error on sync or approximately 10mV offset in 50% point of sync detection). Example 2:

One signal is at  $+80^{\circ}$  SC/H phase and

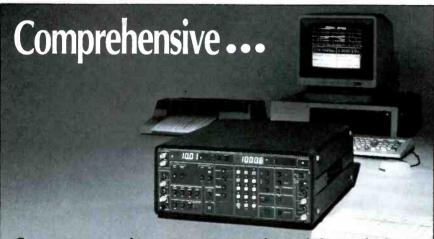

Contemporary audio testing practices demand that audio measurement equipment offer a comprehensive range of capabilities. The multitude of world measurement standards, diversity of industry practice and the flexibility required in the lab can overtax most audio analyzers. Add to this the higher performance demands of the new digital audio techniques and you clearly need a lot of horsepower.

The Amber 5500 Programmable Audio Measurement System answers the call. With the most comprehensive facilities, state-ofthe-art performance, computer interface and ATE speed, the 5500 meets the challenge. Whether you test communication receivers, studio broadcast equipment, Hi-Fi pre-amplifiers or telephone channels, the Amber 5500 is a winner.

The 5500 measures absolute and relative level, three kinds of distortion, weighted and unweighted noise, frequency and crosstalk - and 3 to 10 times faster than other systems. Distortion below 0.001% and noise lower then 1uV are typical of its performance capabilities.

Ask for our "comprehensive" technical brochure and meet the challenge.

Amber also makes one of the most popular portable high performance audio measurement systems - the 3501. Half the weight and size of comparable instruments, the 3501 has one of the best reliability records in the industry.





Amber Electro Design Inc. 4810 Jean Talon West Montreal Canada H4P 2N5 Telephone (514) 7354105 Telex 05-827598 US Toll free 800-361 3697

Circle (34) on Reply Card

It takes a unique graphics look to stand out from today's lookalike news productions. So we've built some unique graphics tools into our new ESS-3 Still Store that you won't find anywhere else.

The ESS-3 lets you compose an unlimited number of elements, all with the fidelity of first generation video. You can cut and paste, key and drop shadow irregular shapes, and program your own dissolves, cuts and wipes. And with its var-

iable compression you can insert over-the-shoulder stills—without a digital video effects unit.

If you're bored with your titles simply scan in your own typefaces; then resize, compress, color and dropshadow to achieve your own new look.

And, to make your news preparation fast and effortless, the ESS-3 displays 12 stills at one time for you to browse through and edit. Compare *that* to any description-only

Circle (35) on Reply Card

index system.

So if you want to jazz up your news, and get the signal quality that comes only from Ampex, get the complete story on the new ESS-3.

Atlanta (404) 491-7112 Chicago (312) 593-6000 Dallas (214) 960-1162 Los Angeles (818) 240-5000 New York/New Jersey (201) 825-9600 San Francisco (415) 367-2296 Washington, D.C. (301) 530-8800

#### **AMPEX**

Ampex Corporation • One of The Signal Companies






Figure 5. SC/H offset is shown. Both signals have the same color frame, but there is a 160° difference in SC/H phase.

a second signal is at  $-80^{\circ}$  (see Figure 5). Even though these signals are  $160^{\circ}$  apart in phase, they are theoretically in the same color frame (that is, on the same side of the vertical axis). Gen-locked equipment may exhibit the same problems as if the two signals were not color framed, however, because there is a sync timing difference of approximately 125ns between the two signals.

Switching between these signals may cause a horizontal jump in the output signal, the typical result when signals are incorrectly color framed. Switching from a 0° SC/H phased signal to either of these signals should not cause the color frame to switch.




Figure 6. Frame offset is shown, but with only a 20° difference in SC/H phase.

#### Example 3:

One signal is at 80° SC/H phase and the second signal is at 100° (see Figure 6). The signals are not color framed even though there is only 20° SC/H phase difference between them. An SC/H monitor should indicate a color frame error and an SC/H error of 80°. Genlocked equipment will give random results in framing, depending on the accuracy of detection. Again, 10° is approximately 7.5ns sync time error or about 10mV error in detecting the center of sync. Switching to either of these signals from a correctly phased signal may cause a frame switch.

Some SC/H phase monitoring equipment indicates only the difference in


SC/H phase between two signals. The resultant display would be at 20° for the signals in Figure 6. This display doesn't indicate that both signals are off SC/H phase and improperly color framed. Switching between these two signals may cause a frame jump.

Example 4:

The signal is varying in SC/H phase field to field or over the field. Such an SC/H variation may cause signal jitter or inconsistent color framing results in some equipment.

#### Causes for SC/H errors

One major cause of SC/H errors is the incorrect setting of video outputs. A maladjustment of the studio reference output may add to any error on the outputs of equipment, such as a TBC that is locked to the reference. There are a number of other causes and also some indications on the signal that there may be a problem. (See Figure 7.) Several examples follow:

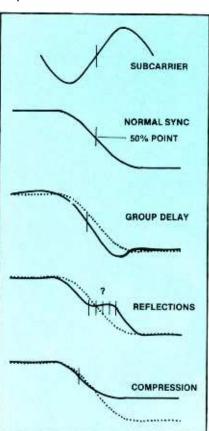

**Figure 7.** Signal distortions may result in SC/H phase errors.

•A video signal passing through a lowpass filter or video delay line with excessive group delay will result in an SC/H error. This group delay will show on the 2T pulse signal as an apparent asymmetrical preshoot and overshoot. Figure 8 shows the results of an improperly adjusted filter, as displayed on a monitor in the *waveform-SC/H* mode.




Figure 8. This display of 2T pulse shows the effect of group delay error from an improperly adjusted filter with a resulting SC/H phase offset of 18° (displayed on a Magni Systems 1527 monitor in the waveform and SC/H display mode).


- •A mismatch in a termination in the system will create reflections and cause a step in the sync waveform. The change in shape of the sync will produce an SC/H error. The step can be seen on a bar test signal. A 25mV step can cause a 10° to 30° offset in SC/H phase, depending on sync rise time and the duration of the step.
- •Sync compression can offset SC/H phasing. Sync compression often changes with the average picture level (APL), causing a variation in SC/H phase. Depending on the response time to APL, this phase variation may occur during a field or over many fields. Sync variations caused by compression can be measured by changing the APL of a test signal.

Crosstalk between signals into sync can cause the sync shape to change in a number of ways that may affect SC/H phase. As a rule, the closer the distortion is to the center of sync and the higher the amplitude, the more likely that SC/H phase monitoring equipment will not give the same results as actual equipment in operation.

#### Monitoring equipment

There are several types of monitoring equipment that measure and display the SC/H and color frame in different ways. The display may be a bar graph, a degree readout, a picture monitor display, a vector dot or other CRT scales.

When deciding on the equipment needed for a facility, consider the following questions: Does it have the accuracy needed? Will it make the measurements where they are needed? Is it self-checking? Is it easy to use? Does the dis-

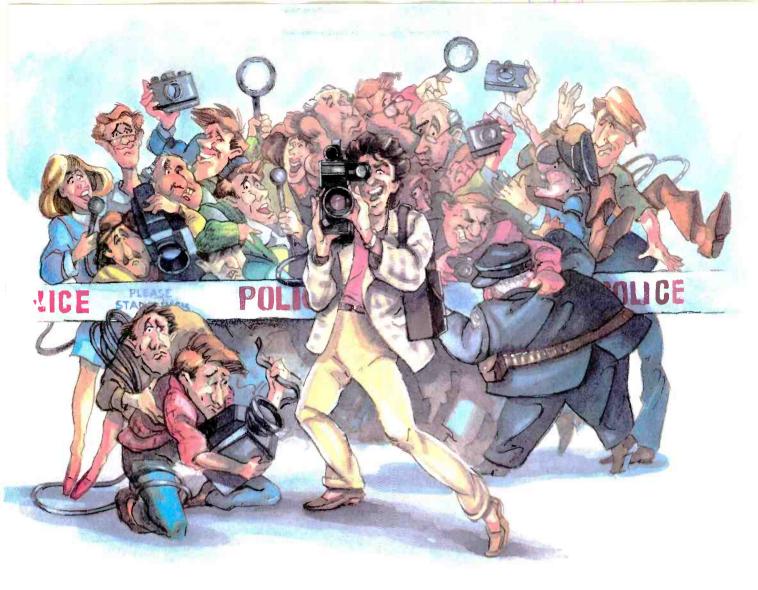

## THE SP-3A. THE SURVIVOR JUST GOT BETTER.

Many thought it was impossible. Now the SP-3A has a built-in variable speed electronic shutter. You can stop or slow down fast action. And what a change that's made! This new shutter has a range of 1/60th to 1/2000th a second. The shutter speed is right in the view-

finder. You can option the SP-3A for triax or multi-core applications, and use it with an integral M-2. Beta® or 8mm format VTRs.

The SP-3A is still the same durable workhorse it has always been. Surviving in African deserts or hurricane gales in Virginia. Getting broadcast images under the worst of conditions.

NEC has taken a reliable sure shot, the SP-3A, and turned it into a stop shot. But that's

not all. It costs only \$14,500

(head only).

So take another look at The Survivor. There is absolutely nothing like it on the market today. What you see will stop you. Right in your tracks.

Beta® is a registered trademark of Sony Corp.



play interfere with other measurements? Will it solve color framing problems throughout the studio?

Features of the SC/H and color frame monitoring equipment must be determined to match the monitoring equipment to its application in the studio. Most SC/H monitors will not work on the VTR demod output because of time base jitter. Some monitors require accurate matching of timing between signals to correctly indicate color framing. Some will not display sync to show possible distortions. These are only a few examples of possible limitations in monitoring equipment now available.

#### Input SC/H phase detection

Up to this point, only the signal SC/H phase and its measurement have been considered. Another cause of color framing errors is the input color frame detection of processing equipment such as VTRs, synchronizers, TBCs and genlocked sync generators. The detection may not be centered at 0° SC/H phase or the equipment may not recognize that the color frame has changed.

As stated in the definition of SC/H phase, 40° error in the signal allows up to 50° error in input detection before reaching the 90° undefined point of ambiguity. Some hysteresis at about 90° must be designed into the input lock of equipment so that changes in input SC/H phase will not cause frame hopping.

These offsets will add together. For example, a wrong color frame determination is initially made, the input signal SC/H phase is off by  $40^{\circ}$ , the input detection is off by  $35^{\circ}$  and the hysteresis is  $\pm 20^{\circ}$ . The detection of the wrong color frame will not be corrected because these offsets add to more than  $90^{\circ}$ .

The fact that the input detection may drift more than the output SC/H phasing indicates the importance of testing the input SC/H phase centering. If there are intermittent framing errors, drift may be a source of the problem. The equipment should switch to the correct color frame any time the input signal is within 40° of correct SC/H phase.

#### Problems in detection

Adding to other errors in detection,


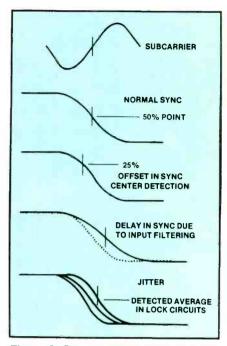


Figure 9. Detection errors result from improperly adjusted equipment or from time base instabilities caused by VTRs.



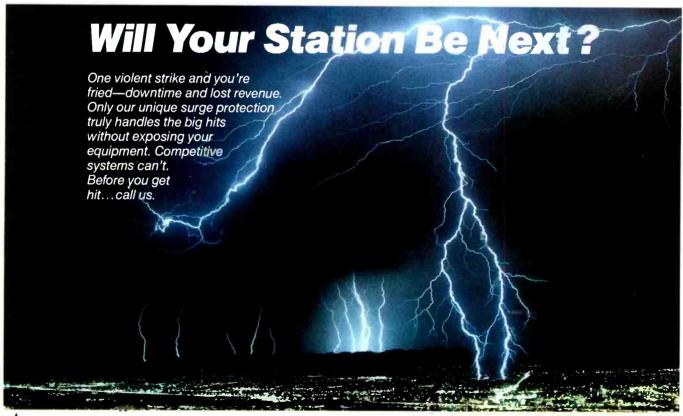

12516 Lakeland Road, Santa Fe Springs, CA 90670 • TWX 910-586-1381 (in CA) (213) 944-0916 • (outside CA) (800) 654-8087

## Look Into Our 8000 Series Master Control Switchers

### You Can Operate It With The Same Common Sense You Used To Bury It.



Model 8020 also available in 12 input rack mount version)

#### FIVE YEAR WARRANTY

We back our reputation for standout customer service with toll free technical assistance lines and one of the strongest warranties in the industry. Our dealers are worldwide, call for the one nearest you.

#### 8000 Series Features

#### EASY TO OPERATE

Logical control layout minimizes potential for operator error.

#### FIELD UPGRADEABLE TO STEREO

Stereo is coming on strong. We keep you prepared so you can easily upgrade.

#### EXTERNAL SERIAL CONTROL

You can save now but still be prepared for the future.

#### MACHINE CONTROL

Intergroup's reliable machine control system interfaces with VTR's and film islands and features sophisticated time display.

It's also field upgradeable.



Model 8001

### **INTERGROUP**

"Creativity You Can Depend On"



INTERGROUP VIDEO SYSTEMS, INC. P.O. Box 1495 / Gainesville, FL 32602-9990 (800) 874-7590 / In Florida (904) 335-0901 / TWX 810-825-2307

Circle (38) on Reply Card

there are some signal differences that may contribute to the problem, but will not show on an SC/H phase monitor. See Figure 9.

If the equipment is not detecting the center of sync properly, sync amplitude and rise time changes will affect the SC/H phase centering (or color frame detection). An offset error of 30mV in determining center of sync (approx-

imately 10% of sync) will give approximately 30° change in SC/H phase detection centering as the rise time changes between 100ns and 250ns. A change in sync amplitude will produce similar results depending on sync rise time and the amount of amplitude change.

If incorrect filtering is used in the input circuits, the phase centering will change with rise time of sync.

Timing jitter in the signal may cause an offset because of loop responses in genlock circuits

When a smooth or gradual change in SC/H phase occurs, some equipment will not change color framing, even though there is an offset of hundreds of degrees. If there is a noise burst, color framing may not recover until an abrupt change in sync occurs.

#### **Testing input detection**

There are few instruments for testing input detection of color frame. Some tests can be done by offsetting the SC/H phase or color frame of several different signal outputs and patching these signals together through a switcher to simulate switched offsets.

A programmable generator is a convenient method to check such circuits because all parameters can be varied easily. A change in sync amplitude will test sync center detection. Sync rise time variations will test input filtering. Jitter will test lock circuits.

To check SC/H detection centering, vary the SC/H phase until the equipment switches color frame. Then, change the SC/H phase back until the color frame switches back. The offset in detection centered at 0° is equal to the offset of the switching angles from symmetrical around 90°. This test may be repeated for each of the sync variations mentioned here.

To adjust centering, set the signal to switch between 40° and 140° and back. Adjust the equipment under test so that it reliably switches color frame as the signal is switched. Fine-adjust to a center of range that will switch reliably. The 100° shift (80ns) in sync should cause a 180° (140ns) shift in the output.

In some equipment, the phases are additive so that the 80ns less the 140ns leaves a net shift of 60ns in sync when the color frame is switched. If the signal SC/H phase is switched between 0° and


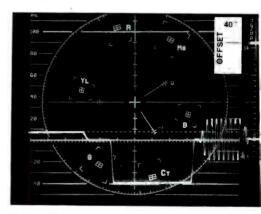


Figure 10. Display of a video signal with a programmed 40° SC/H error.

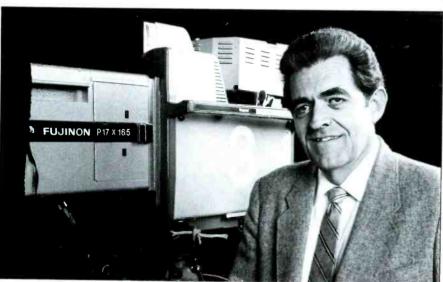

## "From day one every piece of Ikegami equipment from VCC has worked right out of the box." Buck Evans, KHJ Television

"In running a large Los Angeles based TV station, we don't have time for production breakdown or monitor failure. VCC has made it their business to provide us with the finest broadcast television equipment the industry has to offer. Our Ikegami HK 322s, like all our equipment from VCC, have worked all the time, from day one."

Whether you need a small piece of equipment or a large custom made system, Video Communication Corporation's full service staff of video professionals are ready to define

and meet all your broadcast needs. We sell only brands that are manufactured to the strictest specifications and state-of-the-art standards, to guarantee you a trouble free production. At VCC, we feature a full line of Ikegami cameras and camera support making us the #1 choice of many of today's leading broadcasters, like Buck Evans.


You will be impressed with the top quality care, service and equipment VCC offers your facil-

ity. Write or call for your VCC Product Roster!

### **Broadcast Television Equipment Specialists**

NORTHERN CALIFORNIA: 314 Martin Ave. • Santa Clara, CA 95050 • (408) 988-2968 SOUTHERN CALIFORNIA: 2514 Ontario St. • Burbank, CA 91504 • (818) 954-0150

Circle (39) on Reply Card

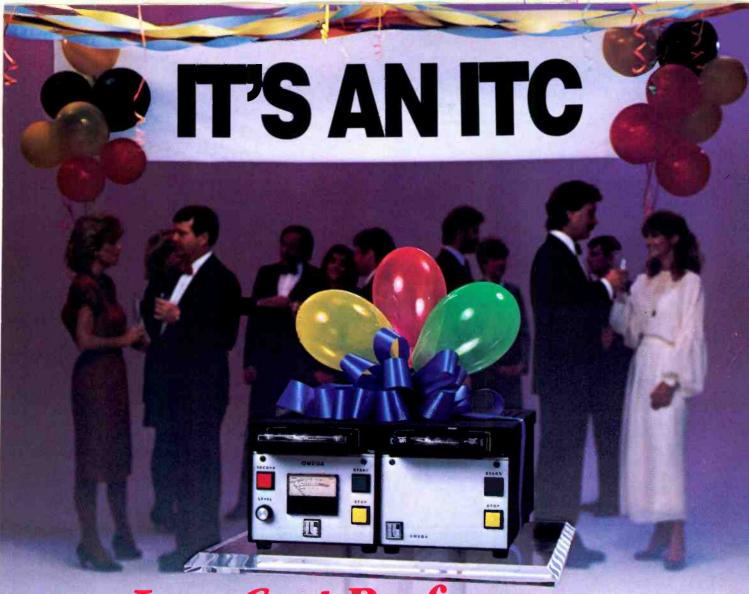

Low Cost Performance

OMEGA cartridge machines embody ITC quality at an affordable price with features to delight everyone ... including low-cost stereo performance.

OMEGA cartridge machines have simple, clean electronics for clear, accurate audio reproduction with the features you need. Microprocessor technology brings you many operational flexibilities with easy, economical maintainability. A crystal referenced DC servo motor provides audibly less wow and flutter, reduced heat and selectable speed operation.

OMEGA mono reproducers are field upgradeable to stereo while OMEGA mono recorders

have a selectable 1 kHz cue tone defeat and include a built-in microphone preamp. With direct microphone input and ITC's "FB-1" telephone answering interface, your facility can offer automatic dial-in information or perform a wide variety of news-room and research functions.

CALL US TODAY to discuss financial options on ITC's complete line of cartridge machines.

99B Cartridge Machines, "The Best"

DELTA Cartridge Machines, "Today's Most Popular Cartridge Machines"

OMEGA Cartridge Machines,

"Affordable Performance You Can Trust"

When newer technology emerges, it will come from International Tapetronics Corporation/3M, "The Leader in Reliability and Service."

In the U.S., call toll-free **800-447-0414**, or collect from Alaska or Illinois **309-828-1381**. In Canada, call Maruno Electronics, Ltd. **416-255-9108**. In most countries outside the United States and Canada, information on ITC equipment can be obtained through local distributors.

International Tapetronics Corporation/3M 2425 South Main Street PO. Box 241 Bloomington, Illinois 61702-0241



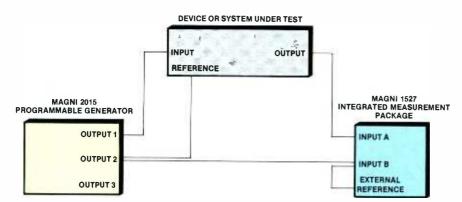


Figure 11. A test system configuration using a programmable signal generator and SC/H phase measurement package.

180°, there would be no residual offset in sync when the color frames switch.

Test the system response time by switching color frame and checking the time required for the system to recover. Some equipment will switch within one field and others will take several fields.

Figure 10 shows a programmed offset at the output of a programmable generator when displayed on an SC/H phase monitor. Figure 11 shows an SC/H

phase and color frame test setup to check both outputs and inputs. Example:

When the signal output is set to +40° SC/H phase, the equipment being tested should remain in the same color frame. Change the output SC/H phase to  $+140^{\circ}$ and check that the gen-locked equipment changes color frame. The output sync shifts by 80ns and the equipment output sync should shift by 140ns (1/2-cycle of subcarrier) or recognize a color frame error.


Now change the generator back to +40° and check that the equipment changes back to the original color frame. A second output from the generator can be set to provide a continuous 0° SC/H phase for a reference.

#### Steps to success

In order to produce consistently highquality video, it is advantageous to make sure that the production facility equipment is all SC/H phased. In checking the phase condition of the facility, there are four steps to SC/H and color frame testing:

- •Determine the signal SC/H phase.
- •Compare signals to determine color framing.
- •Acquire the SC/H phase and color frame monitoring equipment.
- •Check equipment input detection circuitry.

The correct SC/H and color frame monitoring equipment, along with equipment to test color frame detection, can improve the productivity of any studio.

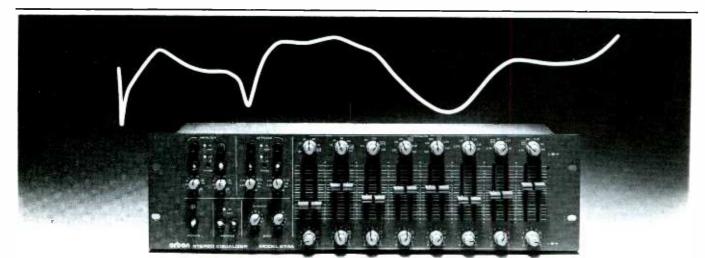

## The indispensible curvebender.

"A one-of-a-kind problem solver"—that's what critics and users have said about Orban's 672A (Mono)/ 674A (Stereo) Graphic Parametric Equalizers.

The equalizer's continuously variable center frequency, bandwidth, and boost/cut and tunable highand lowpass filters make the 672A/674A a superior replacement for conventional graphic equalizers. notch filters, and high- and lowpass filter sets. And this versatility is delivered with pure musicality that's easy on the ears-and at a price that, by comparison to the units it replaces, is easy on the budget.

The 672A/674A will quickly become the centerpiece of your production room. Contact your local dealer for a demo of Orban's indispensible curvebender.

Orban Associates Inc. 645 Bryant St., San Francisco, CA 94107 (415) 957-1067 Telex: 17-1480

Circle (41) on Reply Card



## UNWANTED FRAME GRABBING STOPS HERE



DFS-3000N Digital Frame Synchronizer

If your video synchronizer lets you down on a noisy feed, you need the new Leitch DFS-3000N. This digital frame synchronizer incorporates input processing circuitry that uses the latest in digital auto-correlation techniques to prevent intermittent frame grabbing or switching to black. Only Leitch offers this capability.

Now you know one of the features of the Leitch DFS-3000N. But the advantages don't stop there. Neither should you. Write or call (toll free) for further information.

In U.S.A. 1-800-231-9673 In Canada 1-800-387-0233



Pragressive Concepts in Television Technology

Leitch Video of America, Inc. 825k Greenbrier Circle Chesapeake, VA 23320 (804) 424-7920

Circle (42) on Reply Card

Leitch Video International Inc. 10 Dyas Road, Don Mills Ontario, Canada M3B 1V5 (416) 445-9640

## The folded unipole antenna

By John H. Mullaney, P.E.

#### The folded unipole antenna offers several advantages for stations with inefficient arrays or deteriorating ground systems.

 $\mathbf{T}_{ ext{he}}$  folded unipole antenna has been around for a long time. Yet many engineers are not familiar with its design. Even so, the unipole AM antenna offers a number of advantages, making it worth consideration by stations that have old and inefficient arrays, deteriorating grounding systems or that simply would prefer to have a grounded tower. These advantages are especially important when the station wants to add an FM antenna or reduce the problems associated with lightning and ungrounded

Compared to both series-fed vertical and toploaded antennas, the unipole offers several specific benefits. The unipole has greater radiation resistance. For those stations concerned about AM improvement, the folded unipole antenna provides greater system bandwidth than does a series-fed antenna. The folded unipole antenna's base impedance can be varied, making coupling and bandwidth easy to control. Conversely, the base impedance for a series-fed antenna cannot be easily changed.

For those installations that suffer from instability in inclement weather, the folded unipole can be a real blessing. The antenna maintains its operating characteristics in most types of weather with




Figure 1. The folded unipole antenna can be thought of as a 1/2-wave folded dipole antenna perpendicular to the ground and cut in half.

Mullaney is a consulting engineer and president of Mullaney Engineering, Gaithersburg, MD.

few of the problems found in some series-fed installations.

Unipole theory

The folded unipole antenna is really a grounded vertical structure with one or more conductors folded back parallel to the side of the structure. It can be visualized as a half-wave folded dipole perpendicular to the ground and cut in half. (See Figure 1.) This design makes it possible to provide a wide range of resonant radiation resistances by varying the ratio of the diameter of the folded-back conductor in relation to the tower. Toploading can also be used to widen the antenna bandwidth.

The folded unipole antenna could be called a modification of the standard shunt-fed system. Instead of a slant wire that leaves the tower at an approximate 45° angle (as used for shunt-fed systems), the folded unipole antenna has one or more wires attached to the tower at a predetermined height. The wires are supported by standoff insulators and run parallel to the sides of the tower down to

The tower is grounded at the base. The folds, or wires, are joined together at the base and driven at this point through an impedance matching network. Depending upon the type of folded unipole antenna used, the wires may be connected to the tower at the top and/or at predetermined levels along the tower with shorting stubs.

The folded unipole can be used on tall (130°) towers. However, if the unipole is not divided into two parts, the overall efficiency or unattenuated field intensity will be considerably lower than the normally expected field for the electrical height of the tower. (See related article, "Tall Towers," page 68.) For shorter towers, however, the folded unipole design is less involved.

Calculating the impedance and operating characteristics of a folded unipole antenna is quite complex and will not be covered here. Instead, this article will examine some of the other important aspects of the system.

Most broadcast folded unipole antennas use three folds on tower widths from

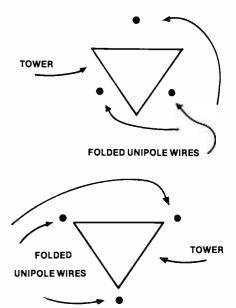


Figure 2. The folds of the antenna are arranged either near the legs of the tower or near the faces of the tower.

15 inches to 48 inches. The folds are arranged either near the apexes of the triangle of the tower or near the sides of the tower, as shown in Figure 2.

The various equations related to folded unipole antennas reflect the number of factors that affect the antenna's impedance. Not apparent from the equations, however, are the structural and environmental problems that can be encountered. For instance, the spacing of the folds from the tower can cause a windloading problem. Furthermore, the accumulation of ice on the bottom of the fold wires and in the strain insulators can cause the VSWR to increase, detuning the transmitter as the base impedance changes.

These problems can be addressed by a triangular brace on the top of the tower cross-arm at the termination of the folds. (See Figure 3.) The arm's spacing should not exceed four times the tower's width or side dimension. The best way to keep ice from building up around the base insulator termination is through the use of a shield-shaped funnel made from copper or sheet metal. This can be used to cover

## THIS IS THE ONE.



## THIS IS THE ONLY.



The nature of ENG and EFP business demands that you have one and only one chance to capture an event the moment it happens.

And when you're talking one and only, you're thinking Sony. The Sony Betacam system is the one to record with, and Sony's Betacam BCT series cassette is the only one to record on. Our exclusive VIVAX'\* magnetic particles, special binder system, new surface treatment and anti-static shell are all specifically designed to ensure the highest level of durability and reliability. And most of all, the best audio and video signal performance possible.

Your Sony Professional Tape Dealer will be glad to give you all the impressive facts and figures on Betacam BCT series cassettes. But the most important fact is: No Sony recorder should have to tape on anything less than Sony tape.





Proud supplier of tape for the Goodwill Games

Circle (43) on Reply Card

Sony is a registered Trademark of Sony Corporation. The One and Only, Betacam and VIVAX are Trademarks of Sony Corporation.




Figure 3. The top brace supports the entire weight of the folds, which are anchored near the base

the top of the strain insulator.

The funnel not only protects the strain insulators from ice accumulation, but also acts as a corona shield. These funnels should be approximately four to eight inches in diameter.

#### **Ground system losses**

If you compare a series-fed antenna with a folded unipole antenna of the same height and similar ground system, you'll find that the unattenuated field efficiency is identical. However, if a seriesfed system is many years old and suffering from a deteriorated ground system. the results may be quite different.

In cases in which the ground system

has deteriorated from weather, chemical action or vehicle traffic, the folded unipole antenna can provide an increase in unattenuated field intensity. This occurs because the antenna currents divide in accordance with the impedance of the line portion and the tower. Therefore, less current flows in the ground resistance portion of the system, resulting in higher efficiency.

The folded unipole antenna is not a panacea to eliminate ground systems, but it does have the capability to work with a deteriorated ground system. The overall tower height determines the maximum efficiency you can expect from an antenna system and the folded unipole antenna can only work within these limits.

#### Bandwidth and coupling

Bandwidth and RF coupling to an antenna go hand in hand regardless of the method used to excite the system. All elements between the transmitter output circuit and the antenna must be analyzed, first by themselves, then as part of the system bandwidth. In any transmission system, the total system bandwidth, not only the bandwidths of individual components, is of primary concern.

The antenna's bandwidth depends upon its base impedance and the rate at which its reactance changes with frequency. The antenna bandwidth is considered to be the frequency band within which the power is equal to or greater than one-half the power at resonance. It is expressed in equation form as follows:

$$\Delta f = \underline{Ra}$$

$$\underline{dx}$$

$$df$$

Where:

f =bandwidth in kilohertz between half-power points

Ra = measured antenna resistance in ohms

= slope of reactance curve at the resonant

frequency

The effective bandwidth doubles when the generator is matched to the antenna circuit. The Q of a folded unipole antenna can be determined from the equation:

$$Q = \frac{f_o}{\Delta f}$$

Where:  $f_o = operating frequency in$ kilohertz

 $\Delta f$  = bandwidth of antenna in kilohertz

Antenna bandwidth is the difference in frequency between two points at which the power output of the transmitter drops to one-half the midrange value. The points are called half-power points. A half-power point is equal to a VSWR of 5.83:1, or the point at which the voltage

Continued on page 68

# Play Only Is Hard Work

Radio automation can be tough on a tape transport. That's why you should equip your system with the hard-working Revox PR99 Playback Only.

The PR99 is Swiss-engineered and German-built to perform smoothly and reliably. Hour after hour. Day after day. Year in and year out.

Revox reliability is no accident. It is based on a solid die-cast chassis, heavy-duty reel motors, a servo capstan motor, and contactless switching. In the Studer Revox tradition, every part is assembled and checked with meticulous precision.


The PR99 Playback Only also offers front panel controls for repro level, EOM stop delay time, and treble EQ for low and high speeds. A front panel light indicates presence of EOM signal. Audio, status, and remote signals are carried through a single multipin connector, so you can replace playback units in a matter of minutes. The PR99 Playback Only is available in 3.75/7.5 or 7.5/15 ips tape speed combinations.




Studer Revox America 1425 Elm Hill Pike, Nashville, TN 37210 (615) 254-5651

One more thing: this rugged machine also goes to work for less money. It has a suggested list price lower than the primary competition.


If you're looking for a playback unit that thrives on hard work, look closely at the Revox PR99 Playback Only. Call or write today for more information and the location of your nearest Revox Professional Products Dealer.

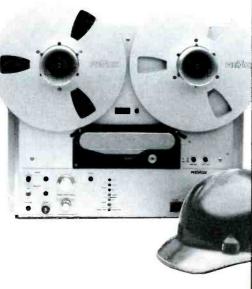

## 23 GHz? Simplex



## to Duplex

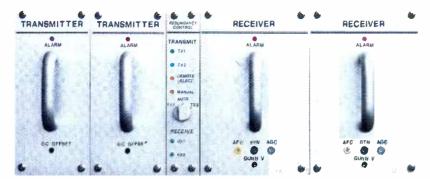

## doesn't have to be Complex.


Meet our newest Microstar,<sup>™</sup> an affordable, expandable 23 GHz STL. Planning to grow? Microstar's

simple plug-in modules let you expand from simplex to duplex transmission, and add protection, much easier than any other radio.

Need versatility? Microstar 23 lets you combine
T1 communications with your video or aural
transmission. And since Microstar is the only
23 GHz STL to meet EIA standard RS-250-B,
it's the only radio that won't degrade your


signal. Best of all, the Microstar 23, like the 2, 7, and 13 GHz Microstars, is competitively priced.

So if there's a 23 GHz STL in your future, take a good look at Microstar 23. There's really no comparison. Contact Harris Broadcast Microwave, 967 Stierlin Road, Mountain View, California 94043. (415) 969-9100 Telex 17-2584.

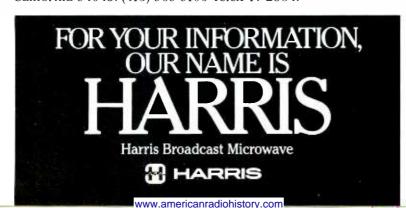





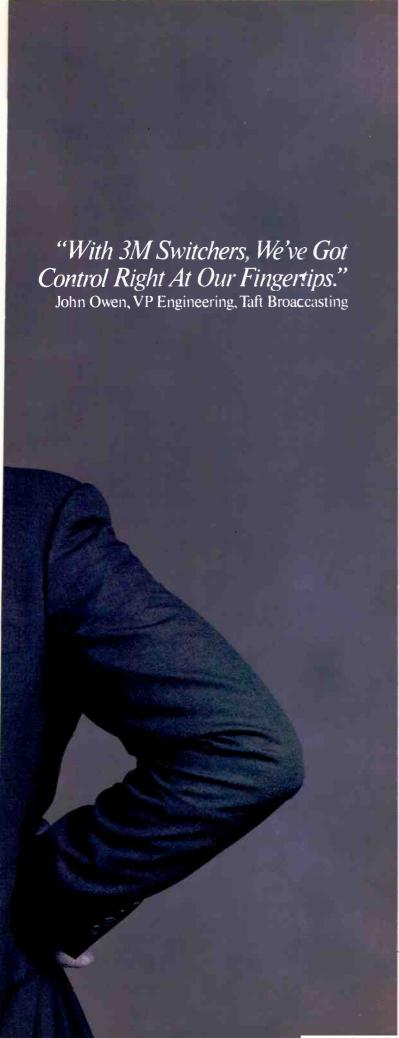

When you've got your finger on the pulse of a dozen stations scattered across the country, you can't simply install routing switcher equipment and then hope for the best.

You have to be sure it's the best.

With the best specs in the industry. With keyboard controls that are fast and easy to use. And software that's as flexible as it is friendly.

That's why John Owen, VP of Engineering for Taft Broadcasting, chose 3M Series H Routing Switchers when six of Taft's stations recently underwent plant redesigns.

"We wanted to quadruple our capacity, and the Series H provided the means of doing it. This system is expandable and has excellent flexibility while providing clean signal switching. It was a major improvement.

"The Series H is based on a primary switching matrix increment of 16 x 16, so you can install a switching frame configured for initial needs, and have room for a good deal of

expansion later on.

"We have a concept at Taft that is somewhat different from most. We look at routing systems for more than distribution from point to point. We try to use the system creatively, and we use it for quality control as well as switching diversity. We believe we are on the leading edge of technology, and we wanted equipment that best reflected that.

"If you want to be one of the premier broadcasting groups, you'll be working closely with a lot of different component companies. 3M took the time to listen when we talked about switchers and was right here in the trenches every step of the way. If I were doing it again, I'd look to 3M in a minute."

More information about 3M Series H Routing Switchers, switching systems, machine control systems and master controls is right at your fingertips as well. Just call toll free: 1-800-328-1684 (in Minnesota 1-800-792-1072).

3M Broadcasting & Related Products Division



Continued from page 64

response drops to 0.7071 of the midrange value.

In broadcasting, equal power in the sidebands is desirable. Because power is proportional to the square of the amplitude of modulation, power is equal to one-fourth that of the unmodulated carrier. In actual practice, a sideband VSWR of less than 1.2:1 within the bandwidth of the program content would be preferable.

#### A typical situation

The following example should provide a better idea of how a folded unipole antenna design can be used to improve a station's signal. The information was obtained from an actual operating station, so the problems and solutions represent real-life situations.

The station was operating with 1kW at 730kHz with a non-directional antenna system. The 300-foot series-fed tower was unstable, especially during inclement weather. The antenna system was more than 18 years old and the ground system was in questionable condition.

Over the years, several buildings had been built on top of the ground system, causing it to further deteriorate. A sidemounted FM antenna had been installed near the top of the AM tower, thereby requiring the use of a coaxial isolation transformer. A preliminary study indicated that it was not possible to replace

the ground system. The station wanted to know if a folded unipole antenna

might help solve the coverage problem. The first step in any redesign is to fully

#### Tall towers

The fact that  $50\Omega$  or some other usable drive point can be obtained on a tall tower does not necessarily make the tower an efficient radiator. For this discussion, consider anything over  $130^{\circ}$  a tall tower.

Generally, an AM station that increases its tower height by locating on an FM tower is not allowed to operate with the efficiency that would be expected from the taller tower. The FCC requires that the station reduce the input power to the antenna so that it will produce the same unattenuated field efficiency for which it is presently licensed. This requirement is based on a mutual assumption that the station's efficiency has not changed.

Unfortunately, in a majority of the cases in which an AM station has moved to a tall FM tower, the station finds that it has increased its bandwidth, but with a noticeable reduction in signal level. The move often causes instability too. Some stations even find that the AM signal appears on the FM carrier at plus or minus the AM frequency.

The installation of a folded unipole antenna is a complex process, especially on a tall tower. Although the math indicates that a series-fed tower can usually be modified, there are a few tricks of the trade that must be followed.

Often, the folds on tall tower installations have been run either to the top of the tower or just below the FM antenna. This may not be the best solution. Sometimes, it's better to use an upper and lower set of folded unipole antennas. In these cases, the bottom section would start at the base, going up approximately 90° where the folds are bonded to the tower.

On some tall towers a second set of folds would start at the top and go down the tower to approximately the 90° point. Here, the top three folds would be connected and tuned through a variable vacuum capacitor connected to the tower. The upper section tends to couple into the lower folded unipole, so some adjustment may be required. This capacitor would then be tuned by remote control to obtain maximum field strength. After the maximum field intensity is obtained through this adjustment, the station power can be adjusted to the licensed unattenuated field intensity.

Folded unipoles can also be used to detune tall towers if reradiation is a problem. Detailed information on this process is available from the author. Write John H. Mullaney, P.E., 9049 Shady Grove Court, Gaithersburg, MD 20877

"For the same price in 10x1 Routing Systems, I'll take GVG every time."



When you can invest in a superior system for the same price as most 10 x 1 routers — Grass Valley Group makes it nearly impossible to look anywhere else.

Add the industry's longest list of options and you've got the most responsive and dependable  $10 \times 1$  Routing System available today.

Call today and ask about the best configuration for *your* facility.

THE GRASS VALLEY GROUP, INC \*— P.O. Box 1114 — Grass Valley, Ca. 95945 USA — Telephone (916) 273-8421 — TRT 160432 — OFFICES. New York (201) 845-7988; District of Columbia (301) 622-6313; Atlanta (404) 493-1255; Chicago (219) 264-0931; Minneapolis (612) 483-2594; Dallas/Fort Worth (817) 483-7447; Los Angeles (818) 999-2303; San Francisco (415) 968-6680.

Grass Valley Group®
A TEKTRONIN COMPANY
STRENGTH YOU CAN RELY ON



#### FINISH UP ON TIME WITHOUT SACRIFICING QUALITY.

You want it quick and you want it good. In today's competitive post-production audio/visual scene, the rewards go to those who can produce results that are quick and good. That's why TASCAM designed the MS-16 1" 16-track recorder—to bring together top-notch audio quality plus premium features that streamline production and move you ahead of schedule.

Quality reproduction starts with the heads, and TASCAM has three decades of design experience behind the MS-16's new micro-radii heads. They bring "head bumps" under control and ensure flat frequency response. And unlike most tape machines, the MS-16 record/sync and playback heads are identical in performance. Because sync response equals repro response on the MS-16, you can make critical EQ and processing decisions on overdubs or punch-ins without having to go back and listen a second time. You get what you want sooner and with fewer headaches.

The MS-16 cuts down on the time you spend locking up with other audio and video machines as well. A 38-pin standard SMI'TE/EBU interface affords speedy, single-cable connection with most popular synchronizers and editing systems. It's the easy, efficient way to get the most out of today's sophisticated synchronization equipment. The MS-16's new Omega Drive transport is tough enough to stand up to long days of constant shuttling... while handling tapes with the kid-glove kindness they deserve.

Record/Function switches for each track allow effortless, one-button punch-ins. Input Enable allows instant talkback during rewinds, fast forwards and cue searches. These features speed you through sessions and let you concentrate on the project at hand...not on your tape machine.

Take a closer look at the MS-16. See your TASCAM dealer for a demo or write us for more information at 7733 Telegraph Road Montebello, CA 90640.

THE TASCAM MS-16 SIXTEEN TRACK



#### TASCAM THE SCIENCE OF BRINGING ART TO LIFE.

Circle (48) on Reply Card

## IGM...

### **POSITIVELY SUPERIOR**

IGM-SC and IGM-EC ...the Ultimate System Controllers

#### IGM-SC

- Sophisticated
- Unlimited Programming
- Easy Operation
- IBM PC Controlled
- Full Live Assist
- Highest Audio Specs.

#### IGM-EC

- Economical
- Syndicator & Satellite **Programming**
- Easy Operation
- Computer Controlled
- Backed by IGM Service

understand the characteristics of the current system. The base impedance was measured and carefully documented. A series of four radials, every 90° from the tower, were marked out and fieldstrength measurements were taken at 10 locations along each radial.

#### Modifying the tower

Based on the results of the measurements, the station's antenna system was found to have a low unattenuated field efficiency. The station decided to use a 3-wire folded unipole antenna to improve the efficiency.


The first step was to reduce the transmitter power to 500W so the riggers could install the three folds on the tower. The tower had a 36-inch face, making the installation fairly straightforward. The riggers were warned to be careful and to not allow the folds to come into contact with the tower during the installation process. The folds were spaced 24

Call us at (206) 733-4567

282 West Kellogg Road Bellingham, Washington 98226

IBM and IBM PC are trademarks of International Business Machines Corporation

Circle (49) on Reply Card

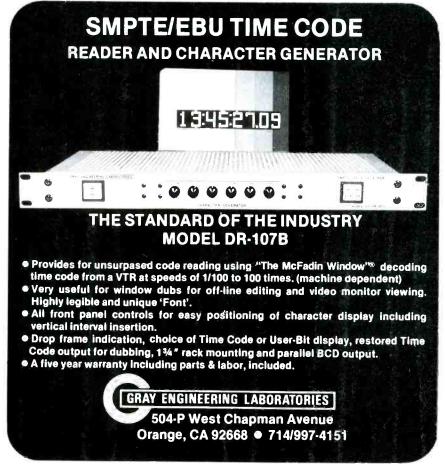

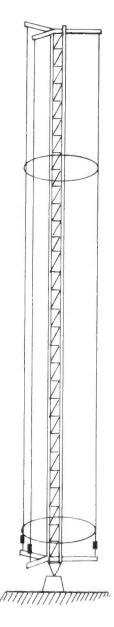


Figure 4. A 3-wire folded unipole installation.

### Our Smart Little Switch Now Has The Self-

### CONTROL

### Of A Yoga Enthusiast

In 1979, our "Smart Little Switch" led the industry. At the time, this 10 x 10 switch had things pretty well under control. With its HDTV performance and component capability at NTSC prices, it soon had risen to become our fastest selling product. Today, it's still the source of considerable peace of mind on the part of users. Now we've teamed the Smart Little Switch with our new Series 1 Controls and are achieving far greater levels of self-control. With a wide range of options, users can add big system features to any Series 10 ever built. Just connect our PCA-904A Control containing one of its many software programs to the comm line and you have X-Y control of the entire matrix — in one rack unit. Insert a different program and you have sequential control that even remembers what you do for the time you do it. That's not all. Select from our growing library of software programs, in combination with Series 1 Controls, and you can achieve such big system features as: • Batch switching from a VDT or computer, or simply from 20 push buttons, each programmed for a different batch . Dedicated twobus control in a single rack unit . Long distance computer control via modems. How's that for control? Using our new Series 1 Controls, there's no end to the system well-being that can be achieved if you put your mind to it. Why not Lotus Position your Series 10 for higher levels of control. If you're not a Series 10 user, with a little serious meditation you could be. To order, control yourself and call: 800-854-2831 NA. • 619-263-7711 CA.

Leaders in Signal



Switching and Control







5275 Market Street, San Diego, California 92114

Circle (51) on Reply Card

July 1986 Broadcast Engineering 71

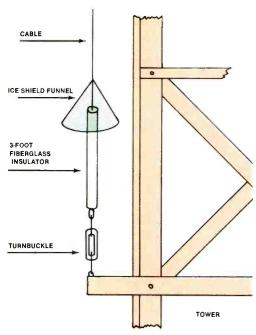


Figure 5. The lower ends of each fold are insulated with a fiberglass rod and protected with a funnel-shaped ice shield.

inches out from the tower face and run from the 300-foot level to the tower base. (See Figure 4.)

After sign-off, three pieces of 4-inch copper strap were installed across the base insulator and soldered to the ground system and tower. The lighting

chokes and FM isolation transformer were removed and the FM transmission line was bonded to the tower every 20 feet. The lighting system neutral wire also was bonded to the base of the tower and again at the obstruction lamp level. The three folds were then bonded to the top of the tower.

At the base, the folds were terminated with 3-foot fiberglass strain insulators, as shown in Figure 5. Because the station is located in snow country, funnels were placed on top of the insulators to prevent ice from detuning the system. The three fold wires were then bonded together and a single wire was run from the tower to the coupling house.

The folded unipole antenna design had a characteristic impedance of  $50\Omega$ , so the folds were shorted to the tower at 160 feet from the top of the tower. The design stage predicted an impedance of  $50+j122\Omega$ . The actual measured impedance was  $50+j135\Omega$ . The distance between the coupling house and the tower accounted for the additional inductive reactance.

After modifications were completed, it was time to again measure the field intensity. The same 10 points along all four radials were checked, and the results were encouraging, showing an increase of approximately 11% in field intensity. The station sounded louder, had better frequency response, and to the listener,

seemed to have broader tuning. The change from a series-fed to folded unipole antenna was a success for this station.

The folded unipole antenna is a useful device for many stations. It can solve problems in a relatively inexpensive manner, often making construction work unnecessary. The grounded nature of the folded unipole tower is a real advantage to stations that are plagued by lightning or that plan to install an FM antenna. For many installations, the folded unipole antenna is equivalent to or better than an identical height series-fed antenna.

#### Bibliography

Mullaney, John H., P.E. "The Folded Unipole Antenna for AM Broadcast." *Broadcast Engineering*, January 1960.

Raines, J.K., P.E. "Folded Unipole Studies." *Think Book Series*, Multronics, 1968-1969.

Howard, George P. "The Howard AM Sideband Response Method." Radio World, August 1979.

Raines, J.K., P.E. "Unipol," a Fortran program for designing folded unipole antennas. Gaithersburg, MD: Mullaney Engineering, 1970.

Mullaney, John J., and George P. Howard. "SBNET," a Fortran program for analyzing sideband response and design of matching networks.

Westberg, J.M. "Effect of 90° Stub on Medium Wave Antennas." NAB Engineering Handbook, 1985.

Mullaney, John H., P.E. "The Consulting Radio Engineer's Notebook." Gaithersburg, MD: Mullaney Engineering, 1985.

# Simply We Have Your Expandable at any time Console! Solution Solution 9000

### 7000

Our premier consoles are designed for simplicity and reliability. The 7012 and 7012A consoles continue to be today's choice, allowing broadcasters excellent sound quality with efficient VCA control, all at a cost well below what others charge for less. 12 channels, 22 inputs, full stereo, with your choice of metering functions. Clearly an excellent console for today's broadcast needs.



### 7512A


This console continues the **Howe** tradition of simple-to-operate, reliable products, but adds features to make the operator's job even easier. These include: remote control for machines, a clock and timer, 2 talkback circuits, and much more. Comprehensive operator control and superior sound quality make the **7512A** an exceptional choice.

The latest in the legacy of quality consoles from **Howe**, the **9000** is available from 8 to 22 channels tailored to your needs. There is no costly mainframe, but full modular capability is built in. 3 inputs per channel, mix-minus on all channels, sealed membrane switches for channel and machine control, and unmatched audio performance. These features and more combine to give the broadcaster outstanding flexibility.

Circle (52) on Reply Card

howe audio productions, inc.

2300 Central Avenue • Suite E • Boulder, CO 80301 (303) 444-4693 • For more information (800) 525-7520

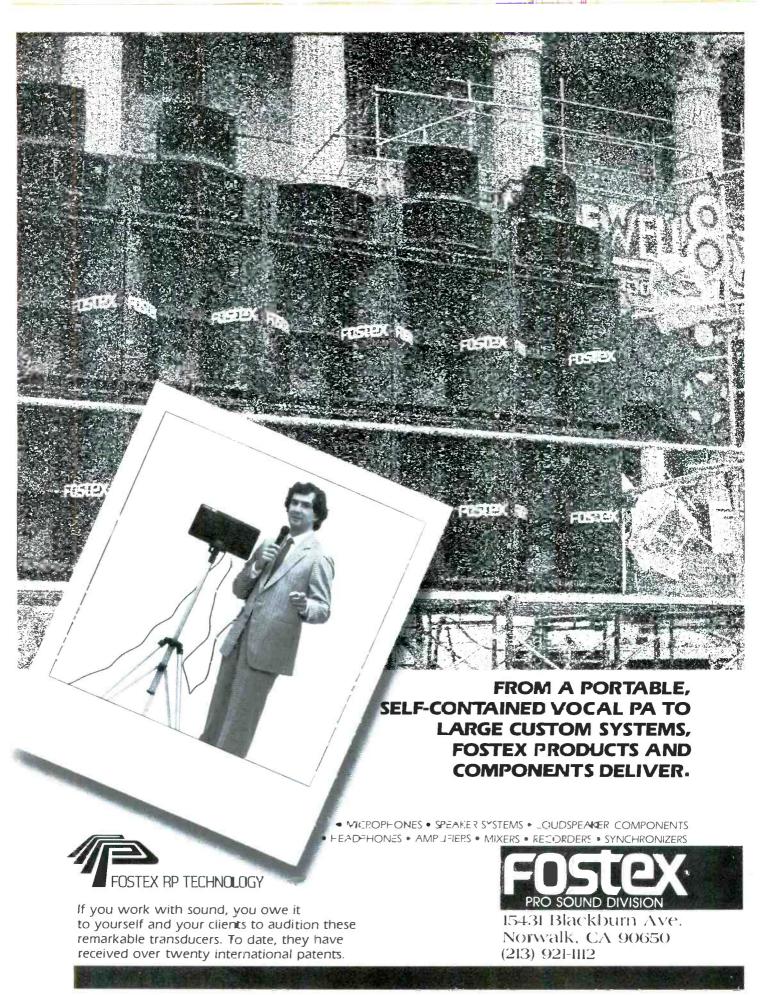

# Integrating AM and FM antenna systems

By Lewis M. Owens

A tall tower can be incorporated into an AM directional array to provide better coverage for your FM station.

However, you must plan carefully.

 ${f W}$ ith the rise in FM station popularity, the second-cousin relationship between AM and FM installations is changing. In the early days of FM, stations typically stressed the coverage of the AM facility over the FM. Today, however, stations are interested in maximizing FM coverage. This process often requires replacing typically short AM towers with much taller towers to provide the needed height for the FM signal. Incorporating these tall towers into an AM directional array requires planning and construction because such tall towers are often electrically far too long for efficient AM radiation.

There are various methods available to electrically *shorten* an AM/FM tower. One key lies in being able to use a physically long (tall) structure and, in some installations, detune the upper portion so the AM signal "thinks" the tower is really much shorter than it is.

#### Field efficiency

The FCC rules provide a convenient chart that allows you to determine the approximate effective field at one mile based on antenna height. The chart, shown in Figure 1, is predicated upon a power of 1kW. The field intensity is the inverse distance value measured at one mile.

From the chart, you can see that maximum field intensity is achieved when a tower has a height equal to 0.625 wavelength, (or, as it is more commonly expressed, 5/8-wavelength.) It would appear, according to the chart, that optimum efficiency would be obtained from a tower exactly 5/8-wavelength tall. Unfortunately, towers are affected by a number of factors and the predicted dimension is usually somewhat different than the actual physical structure.

Owens is an engineering consultant and owner of Radio Engineering Services, Lexington, KY.

### Influencing factors

Some of the factors that can influence the electrical length of a tower are more obvious than others. Side-mounted or top-mounted FM antennas and tower lighting chokes are obvious influencing factors.

Another factor involves the physical width of the tower. For example, a tower



The top section of the 660-foot tower after the FM antenna was mounted.

having a face width of 48 inches and height of 400 feet would have a 1% W/H ratio. That is, the width is 1% of the electrical height. Don't confuse this factor with the effective tower diameter. The effective diameter can be precisely determined only for a solid pole antenna. A


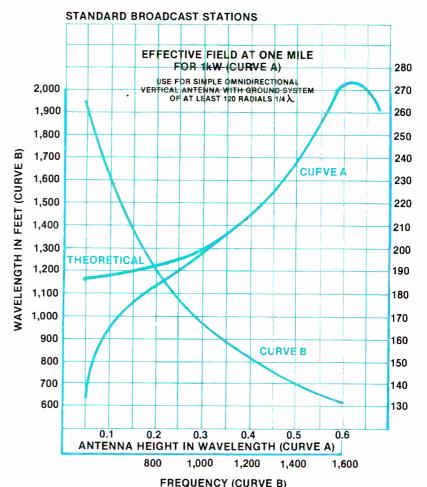


Figure 1. Effective field intensity at one mile (FCC Figure 8).

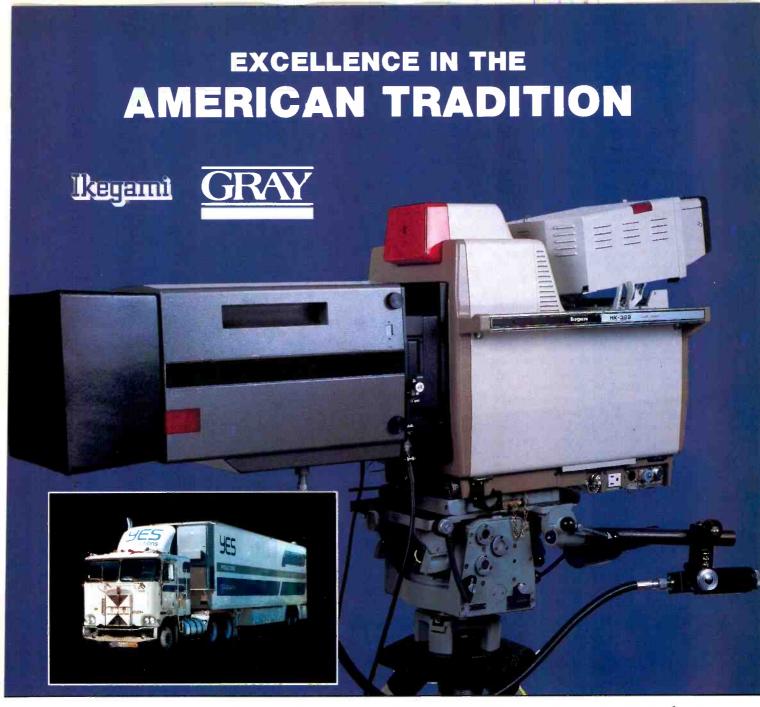

American business tradition is characterized by unsurpassed excellence in service, reliability and quality. True to this tradition, Gray does it the old-fashioned American way—we do it right the first time!

Teamed with quality cameras from Ikegami, Gray offers the finest equipment and over a decade of video engineering expertise. Call your local Gray office for excellence in service, reliability and quality.

ALBANY, GA (912) 883-2121 ATLANTA, GA (404) 956-7725 BATON ROUGE, LA (504) 928-1171 BIRM.NGHAM, AL (205) 942-2824 CINCINNATI, OH (513) 896-1011 FT. WALTON BEACH, FL (904) 651-8546 FT. LAUDERDALE, FL (305) 523-3637 GAINESVILLE, FL (904) 332-2436 HUNTSVILLE, AL (205) 881-5840 KNOXVILLE, TN (615) 588-7161 N. LITTLE ROCK, AR (501) 758-3234 MEMPHIS, TN (901) 525-1135 MIAMI, FL (305) 591-3637 MOBILE, AL (205) 476-2051 NASHVILLE, TN (615) 883-9175 NEW ORLEANS, LA (504) 733-7265 (504) 733-7290 ORLANDO, FL (305) 896-7414 ST. PETERSBURG, FL (813) 823-6840 TAMPA, FL (813) 885-1411

### GRAYCOMMUNICATIONS C D N S U L T A N T S · I N C

404 SANDS DR. ALBANY, GA 31705 [912] 883-2121 TWX # 810-781-5110

self-supporting tower would create a worst-case situation.

A less obvious factor would be the height of the top beacon or lightning rod. Using the previous example, a 48-inch lightning rod would add 1% to the electrical height. Another common factor is the influence of FM or TV transmission lines mounted on the AM tower. These lines are often mounted on standoff insulators for the first 1/4-wavelength of the tower. Isocouplers and communications antennas also can affect the electrical length of the tower.

You know that many factors can affect the operating height of an AM tower, but how do these elements come into play in real-life situations?


#### Tall tower No. 1


An FM station was operating from its AM tower site by using one of the directional antenna towers. The 6-bay antenna was side-mounted on a 300-foot (69°) tower that was part of a parallelogram array. The center of radiation was only 279 feet. Even worse, the 36-inch face of the AM tower caused severe distortion in FM coverage. Errors of  $\pm 6dB$  in the horizontal and  $\pm 8.5 dB$  in the vertical patterns were leaving large coverage holes in the market the station was attempting to serve.

In order to improve the coverage without relocating the FM tower, it was decided to increase the height of one of the AM-DA towers from 69° to 152°. This was the maximum height practical guying would permit. The final design mounted the FM antenna on a 60-foot pole located on top of a new guyed tower. The unguyed pole allowed us to optimize the FM antenna, providing  $\pm 2.25$ dB horizontal and  $\pm 1.46$ dB vertical circularity.

#### First results

After the new tower was completed, the FM antenna, transmission line and isocoupler were installed. As adjustments began on the new antenna system, a problem was noted. The new 150° tower self-impedance was  $710+j238\Omega$ , much higher than expected. It seemed that the tower wanted to operate at more than 152°. After a close inspection of the selfimpedance curve, it was discovered that

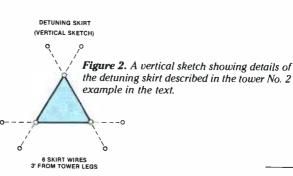

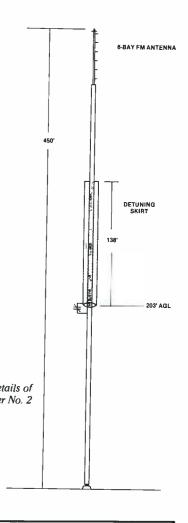

### A SIGHT OR SORE EA



If ears could talk, they'd scream for SONEX. The only patented acoustic foam with a specially sculptured anechoic design can replace traditional studio materials for a fraction of the cost. SONEX absorbs sound,


controls reverb, eliminates stray reflections, and kills standing waves. What's left is true sound. Your ears know. Listen to them. Simple to apply and economical to buy, SONEX blends with almost any decor and looks clean, sharp, professional. Call or write us for all the facts and prices.

SONEX is manufactured by Illbruck and distributed exclusively to the pro sound industry by Alpha Audio.

2049 West Broad Street Virginia 23220 (804) 358-3852 Richmond, Virginia 23220

**Acoustic Products for the Audio Industry** Circle (55) on Reply Card

### High-quality telephone remotes.

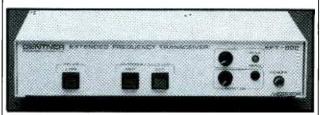

### At an affordable \$849.

Introducing Gentner's NEW EFT-900 Extended Frequency Transceiver.

- Improves phone line quality with frequency extension, Aphex® enhancing and sharp filtering.
- Internal telephone coupler, mic preamp and headset amps eliminate the need for other equipment.
- Mic or Line input; Aux Line input.
- Easy hook-up and operation.
- Low Cost only \$849 each.

The Clear Choice.

### ENGINEERING COMPANY, INC.

540 West 3560 South Salt Lake City, Utah 84115 (801) 268-1117

Circle (56) on Reply Card

### EVERY SECOND COUNTS!!



THE ASACA ACL-6000C RANDOM **ACCESS AUTOMATIC VIDEO CART** SYSTEM IS THE MOST SOPHISTICATED AND VERSATILE **CART SYSTEM IN THE WORLD TODAY** 

- ▶ 600 ½" Cassette Capacity
- ▶Sophisticated Bar Code Reader/ Identification System
  - ▶Side Door Load/Eject System for Last Minute Changes and Complete User Safety
    - ▶State-of-the-Art Software Designed by Dubner Computer Systems
    - ►Software Support and Modification by Dubner Computer Systems
    - ▶The ACL-6000C is Controlled by a Charles River Universe 6835 Computer
      - ▶SMPTE Time Code is Utilized for **Precise Cueing**
- ▶The ACL-6000C is Capable of Multiple Segments on Cassettes for Total **Programming Automation and Library**

▶The ACL-6000C is Capable of Stand Alone Remote Control Operations or May Be Interfaced With a Station Automation System

▶Complete Flexability Using Either Sony Betacam or Panasonic M-II Formats

ASACA/SHIBASOKU

CORP. OF AMERICA

12509 Beatrice Street, Los Angeles, California 90066 213-827-7144/800-423-6347/Telex-182089

Circle (57) on Reply Card

the tower indicated operation near 180°.

A number of 1kW NDA measurements revealed that the tower's radiation was approximately 215mV/m at one mile. The antenna coupling units (ATU) were adjusted to the theoretical antenna base operating impedances and desired phase shifts and installed. To speed up the DA tuning process, the plate-modulated transmitter was used instead of the pulsemodulated unit. The older platemodulated transmitter was less sensitive to common point impedance changes.

The tall tower continued to be a problem with the daytime pattern tune-up. The tower base operating impedance was more than  $1,000+j200\Omega$ , instead of the anticipated  $250-j200\Omega$ . A base operating impedance of  $1,700 + j400\Omega$ was selected. After field-modification of the tower's ACU, the entire array responded properly to final adjustments.

The final array adjustments showed the ACU input impedance well within 10% of the desired  $65\Omega$ , with a maximum of  $\pm i8\Omega$  reactance for both daytime and nighttime patterns. Just as important, VSWR remained within 1.15:1 over ±10kHz, relieving our concern about system bandwidth with the higher-thandesired impedance transformation ratio of the ACU at the 152° tower.

### Tower No. 2

A second installation provided a dif-

ferent set of problems. The AM station operated on 1,570kHz with 5kW daytime using two wide-spaced 115° towers. One of these towers had a side-mounted FM antenna with a bazooka FM transmission line arrangement. The other tower was 86° tall, top-loaded to 115°.

Because of the need to increase the height of the FM antenna, the decision was to replace the 115° tower with a 255° tower. The installation, therefore, required that the structure (tower height) above 115° be detuned from the lower section of the tower. This process would permit the use of the extra height of the tall tower for maximum FM coverage and still maintain the 115° height needed by the AM array.

The detuning skirt shown in Figure 2 was designed to be just under 1/4-wavelength long. The advantage of this approach was that a variable capacitor could be used to make final tuning adjustments. The detuning skirt consisted of six cables running parallel to the tower legs.

In order to prevent any possible resonance from the base of the detuning skirt to the top of the tower, a simple 1-conductor detuning arrangement was also installed from the top of the tower to the main detuning skirt.

The self-impedance measurements turned out to be close to the predicted values for the 115° antenna and the non-

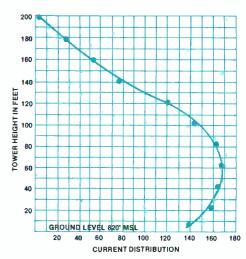


Figure 3. Current distribution curve for the 115° section of the tower.

directional field-intensity readings were correct. The current distribution for the 115° tower is shown in Figure 3.

The system has been in operation for several years now without problems. One of the major benefits of the installation is its stable operation. As these two examples show, tall towers can be incorporated into a directional antenna array. The process requires careful planning and usually a lot of field-intensity measurements. However, given the advantages of locating the FM antenna at an existing AM site, it's worth it. [=\( \frac{1}{2} \)))]

## With our Automatic Remote Control System your transmitter — and your personnel — will operate with increased efficiency

Have you ever wondered if your night operator will remember to switch patterns at sunrise? to periodically check critical levels? ... the correct transmitter restart sequence? You'll never have to worry if Potomac Instruments' RC16 + is on the job. Because it'll do all these tasks for you. Plus a lot more. Automatically.

With its microprocessor based control logic, the basic RC16+ provides 16 telemetry channels with automatic out-of-tolerance alarms and remote raise/lower controls:

plus 16 status channels. The automatic functions — pat tern shift, transmitter restart, power control - are preprogrammed in accordance with station license requirements and controlled with an accurate master clock.

The RC16+ is also expandable. In 16 channel increments, up to a total of 64 channels. With the remote video display option your chief engineer can get a detailed readout of all measured parameters. It's updated every 30 seconds and connects to any standard telephone. The optional plug-in automatic logger provides a permanent record of all transmitter activity. Log intervals, sequence, and alarm flags are user-selectable.

And, best of all, the RC16 + is cost effective. No other unit on the market offers these features and capabilities at this low price.

.....\$4,995.00 Basic System ... Remote Video Display Unit

932 PHILADELPHIA AVE. SILVER SPRING, MD 20910 (301) 589-2662

Circle (58) on Reply Card

### THE NEW TSM-60 WAVEFORM MONITOR & VSM-60 VECTORSCOPE



### Simply the Best.

Prove it, you say? Frankly, we welcome the opportunity.

**Performance:** In frequency response tests, the TSM-60 Waveform Monitor is *flat to 10 MHz* and is as accurate at 20 MHz as most others at 5!

**Features:** The TSM-60, with its impressive array of standard features, is the only waveform monitor to offer *both* Line Select and selectable 1H/2H Display Modes.

**Delivery:** You don't have to wait months or even weeks for a waveform monitor or vectorscope.

Videotek sets the industry standard by consistently delivering in just *days!* 

**Support:** If you ever need an answer or technical backup, you can count on us. Our "Distinguished Video Industry Service Award" attests to that.

Value: Compare Performance vs. Cost of the TSM-60 and VSM-60 to any others in our field, and you'll find none better.

Need more proof? If so, we invite you to personally evaluate the TSM-60 Waveform Monitor and VSM-60 Vectorscope in your own facility. Contact your Authorized Videotek Dealer or the Videotek office nearest you, and we will arrange for you to prove to yourself what we mean by Simply the Best.





### Directions in video editing

**By Steve Smith** 

### The technology and applications for random access editing exist. Now, the education starts.

The editor of a half-hour videotaped sitcom is in a quandary. Which version of a scene will produce the biggest laugh? After viewing three edits of the scene, there's no question as to which one delivers the right timing.

In the post-production suite, a client is undecided how his \$125,000, 30-second spot should *feel*. If he could just *see* three or four different versions back to back, he could make a decision.

The director of a major motion picture doesn't have time to wait for rushes before doing a rough edit of a critical scene. An off-line, real-time edit of the videotaped footage can resolve critical scene construction issues—now.

#### Why random access?

These scenarios exemplify the power and freedom of true *what if?* editing. Such capabilities have become real with emerging random access editing system technologies. As the name implies, random access editing gives TV post-production producers and film editors the capability to select segments of video and to orchestrate them into a play list. The editor can view the sequence in real

time as tentatively constructed.

Changes in order, length and segment selection can be made at will without committing a single edit to tape or film. The time-consuming task of re-editing a sequence to make the slightest change is avoided. Once all permutations of a sequence have been explored, a computerized edit decision list (EDL) is created. Then, using the studio's on-line editing system, a conforming edit is performed from the master video reels or negative film, exactly as specified by the random access system EDL.

The speed of random access, combined with a freedom to explore creative possibilities, could revolutionize film and videotape editing and should improve the creative caliber of the final product.

#### An idea revisited

As avant-garde as it may seem in 1986, the concept of random access editing predates the 1972 introduction of the CMX model 600 disk editing system. Analog technology gave the system a 20-minute capacity of monochrome video. A light pen on a monitor identified segments for storage on 16 large magnetic disk drives. The CBS-Memorex joint venture was commercially unsuccessful for a variety of reasons. Interest in random access editing waned in favor of the linear systems prevalent today.

With the advances in recording technology, however, interest in random access systems has been renewed. Three approaches showing promise are:

- · laser/optical disk-based systems,
- multiple tape deck/controller systems, and
- laser or computer disk-based audio systems.

There are three primary applications for random access editing:

- Tape to tape: programs shot on tape and released on tape, such as sitcoms and ENG. Random access would be used for off-line editing. The tape is first transferred to a disk or tape system, edit decisions are made and an edit list is created. Finally, the program is edited in the suite with the on-line system.
- Film to tape: This use is best illustrated by commercials. Typically, commercials are shot on film for optical quality and released on tape. The random access editor for this application would emulate a film flat-bed. Manipulation is done in the video mode, allowing the editor to perform dissolves and to see the tentative edits being performed. When an edit list is finalized, on-line editing of the piece is set to tape.
- Film-tape-film: Motion pictures are shot on film and released on film. The editing process may be enhanced with a random access disk or tape-based system. Real-time preview of scenes enables filmmakers to make specific choices on how the different takes fit together.


In addition, a number of filmmakers use *video assist*. A video camera is tied beside the film camera to provide instant recorded images of the scene as it was captured on film. The video scenes can be edited on location with a random access system, providing an instant feel for how the scene will appear. By the time the film is processed and the rushes reviewed, many scene and take decisions can already be made.

### Stumbling blocks

The creative potential of random access editing systems would seem to make them the method of choice over today's off-line linear systems. Yet, the industry

Continued on page 83

Smith is senior product manager of editing systems for Ampex Corporation, Redwood City, CA.

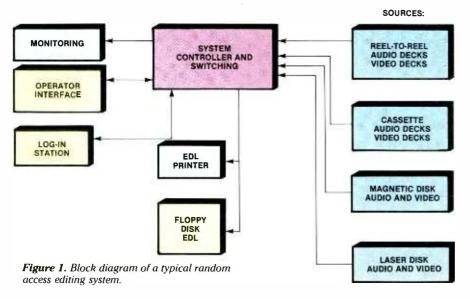

### YOU DON'T HAVE TO REMODEL TO ADD ON

lundreds of Background and oreground colors can be stored in Resident Memory for use at any time.....



With some character generators the cost for additional features is the cost of a new character generator. The Laird 1500 is expanded through software updates. The operating system and 70 fonts are loaded by two 3½" disk drives. This unique feature allows you to add options anytime, without having to scrap your entire system. Priced at \$7,695 the Laird 1500 is designed to expand with your horizons.

### NEW ADD ON FEATURES FONT COMPOSE

Creates new fonts by resizing and editing any of the existing 70 fonts. \$495

### DATA TABLET

Logos, drawings and fonts can be traced into the 1500 with an electronic stylus. Speeds the editing process when used in conjunction with Font Compose. \$1,495

### **CAMERA ENTRY**

Digitises art work and graphics instantaneously for editing and colorizing. (Requires separate B&W video camera and copy stand) \$1,995

### STANDARD FEATURES

- ☐ 16 resident fonts
- ☐ 70 font library
- ☐ High resolution characters (35ns, 1508 pixel x 485 scans)
- □ Proportional spacing
- ☐ 16 tab stops
- ☐ Vertical and horizontal flip
- ☐ Selectable roll and crawl rate
- Multiple angle italics
- ☐ Title Mode
- $\hfill\square$  Flash and underline
- ☐ Up to 100 pages of internal memory
- □ Dual channel operation
- ☐ Four quadrants of drop shadow
- □ Center, right and left justify
- □ Character tuck and overlap
   □ 65,536 resident colors
- ☐ Insert and delete editing
- ☐ Eight edge intensities
- □ Character Attributes

\*User's choice of broadcast or industrial encoder required for color operation.



LAIRD TELEMEDIA INC.º


WEST 2424 South 2570 West Salt Lake City, Utah 84119 (801) 972-5900 MIDWEST Three Dallas Communications Complex 6314 N. O'Connor Suite N38 LB160 Irving, Texas 75039-3510 (214) 869-7693

Circle (60) on Reply Card

Suite 100 North Birmingham, Alabama 35243 (205) 870-0967

#1 Perimeter Park South

www.americanradiohistory.com

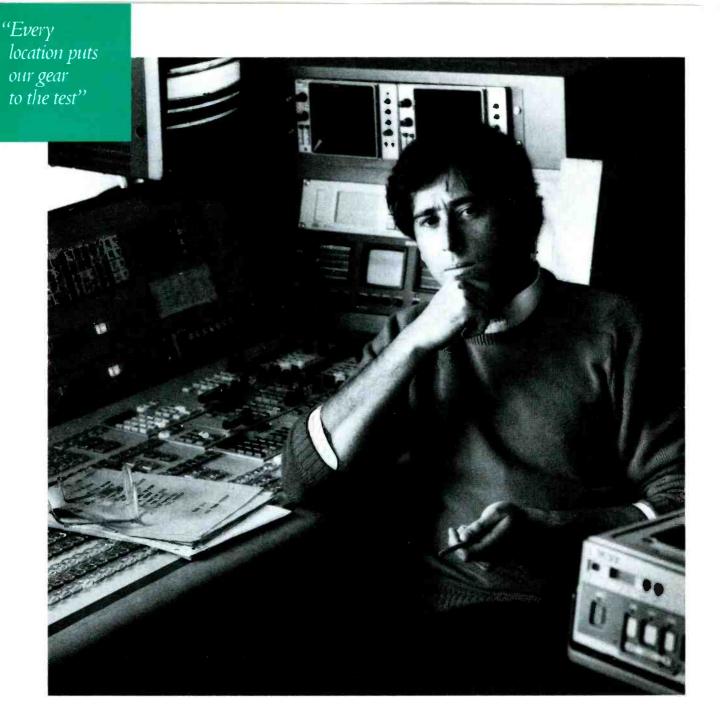

"The only constant when you're on location is that everything changes. No matter where we go, the production site is unforgiving and the production staff is demanding. This really puts our gear to the test.

Fortunately we have great equipment to get us through. Especially the RTS 802 Master Station intercommunication system. It covers all our intercom needs with 12 conference-line channels, camera iso, squawk, IFB, and

more. We depend on this kind of versatility."

The Series Intercom products cover a wide range of production requirements they pass the test in the field or in the studio.

Call or write for details.

### RTS SYSTEMS

N C O R P O R A T E D

THE FIRST NAME IN INTERCOMMUNICATIONS

Circle (61) on Reply Card

Continued from page 80

has not taken serious notice. The reasons fall into three familiar areas; price, functionality and integration.

Of the few existing commercial systems, all are expensive and are designed for specific applications. To bring these systems to a broader market would require that they successfully compete as replacements for flat-beds and off-line studio systems. Significant price reductions also would be required for any notable market penetration.

Still in their infancy, these systems have deficiencies that limit their appeal. The lack of ISO or multicamera editing capabilities make these systems inappropriate for TV program editing, in which multiple cameras record the scene and the tapes are synchronized during the editing process. In multiple tape deck systems, machine control is limited to consumer format VCRs that are not compatible with studio recorders. This makes on-line editing impossible.

The capacity of laser disk recorders limits their application primarily to commercials unless multiple recorders are linked. A multihead laser disk unit with A/B roll preview capability from a single disk can lessen this drawback. As with consumer tape formats, laser disk video quality is unsuitable for on-line editing. Like tape-based systems, the laser disk approach currently cannot control graphics or effects that must be added during on-line editing.

In short, various pieces of the random access editing puzzle exist, but they have not formed a completely integrated system. Ideally, such a system would consist of a laser disk recorder, tapebased system and random access audio system. It must be capable of providing on-line and off-line editing and integrate easily into an existing facility.

When further developed, both laser disk and tape technologies will have a place in the market and will coexist with linear editors. Laser disk recorders now store a 30-minute segment of information on a single disk and are ideal for commercial production. Tape-based systems, especially when made compatible with existing studio machines, have much greater versatility.

#### To market

A major barrier to market acceptance of random access editing is that the industry is unaware of its tangible economic and creative benefits. To compound matters, the competitive industry environment plays a major role in the adoption of new technology. Customer demand and the pressures of competition have a direct impact on the equipment purchased. Existing editing tools in film and video are effectively meeting today's daily requirements. The opportunity for market growth will come as facilities replace aging off-line editors and flat-bed film systems.

Over the next five years, random access systems will improve and the number of manufacturers will increase. We can expect significant random access inroads into the market. Ultimately, however, the development of the random access editor market will be dictated by the industry. As with any revolution, it's a matter of time.

### Hardware for random access

Laser disk technology is currently the medium of choice for long-play random access. Thirty minutes of video can be recorded on a single laser disk. Equipment is somewhat limited because ODC Corporation, Cerritos, CA, is currently the only company to manufacture a LaserVision-compatible, real-time laser disk recorder. However, several companies do provide tape-todisk transfers.

Spectra Image, of Hollywood, CA, has the largest disk-based off-line random access editing facility using the ODC unit. This one-of-a-kind facility was designed and built by Spectra Image for sitcom and episodic use.

EditDroid, from the Droid Works, uses optical disks as a source medium. Designed for the feature film editor, this system concentrates more on the front end of the post-production process by using an electronic log-in station. The editor chooses up front which variation of the scene and take to edit. With editing choices completed, an industry standard EDL is produced.

The videotape concept, introduced by Montage Computer, was a multimachine controller for up to 17 consumer Beta format VCRs and borrowed greatly from film-style editing to emulate a flat-bed film editor. The system gave access to any portion of four and one-half hours of film or tape information with little or no delay. Primarily used for commercials and feature films, the system received high marks from film notables such as Sidney Lumet and Alan Alda. Montage, unfortunately, recently ceased operations.

A new tape-based entry in random access editing has been reported at work in Hollywood for episodic material. A light pen and touch-screen system controls consumer VHS VCRs as a source medium. The system has a 1-hour capacity and is easy to use, because its script-based process is familiar to film editors.

There is also a need to integrate random access audio systems with video. There are several such audio systems now available, storing audio data on Winchester-type computer disk drives or laser disks. These systems allow access to, and editing of, individual tracks of digitized audio. With them, audio may be placed in any relationship with video. In conjunction with a random access video system, the editor builds an edit using virtually any audio or video material on the system.

1:(:-)))]

### **New Class A** Winner



Continental's Type 814B 4.3 kW FM Transmitter uses the Type 802A Exciter to deliver a crisp, clean signal.

With an output of 4,300 watts, it has plenty of power reserve for Class A operation on a 2bay antenna system. It's solid-state except for one 4CX3500A Tetrode in the final amplifier. A built-in harmonic filter is just one of many outstanding operating benefits. For a brochure, call (214) 381-7161. Continental Electronics, a Division of Varian Assoc., Inc. PO Box 270879 Dallas, Texas 75227.

Transmitters 1 to 50 kW AM and to 60 kW FM, FM antennas, studio & RF equipment  $\,$  ©1986 Continental Electronics/6213  $\,$ 





Circle (62) on Reply Card

### 'IDEO D A

ES 207



 $4.7" \times 3.7" \times 2.2$ 

### RF IMMUNE! **GOES ANYWHERE**

1 x 4 or 1x5

Gain-Adjustable from .5 to 1.5 Volts

**Equalization**-Compensates

for 1000' of RG-59/U

Response-.5dB at 10MHz


Propagation Delay-100Nsec

142 SIERRA ST EL SEGUNDO CALIFORNIA 90245 (213) 322-2136



Circle (63) on Reply Card

### Field report

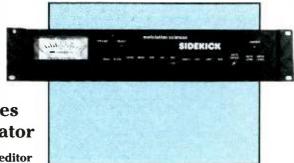

### Modulation Sciences Sidekick SCA generator

By Brad Dick, radio technical editor

A current topic of interest among FM broadcasters is the implementation and use of subcarriers for various purposes. New FCC rules allow a station to use additional subcarrier services while increasing modulation to as much as 110%. With this rule change, broadcasters can now operate in stereo with two separate subcarrier services and not sacrifice significant loudness in the main channel. Even with these technical changes, however, there still remains one major stumbling block in adding new services to an FM channel: the quality of subcarrier equipment.

To accommodate the potentially numerous subcarrier services, Modulation Sciences has introduced the Sidekick, an integrated generator and audio processor. The Sidekick contains all of the necessary hardware to allow stations to begin transmitting aural subcarrier services on any desired frequency. The unit is an integrated assembly, including a crystal-controlled generator, modulation monitor, audio processor and transmitter tuning aid. With this equipment, installing a subcarrier service is straightforward and easy.

#### General description

The unit is contained in a small racksized cabinet 3½ inches high. The front panel contains a meter for reading AM synchronous noise, broadband audio gain reduction, high-frequency gain reduction and peak subcarrier deviation (modulation). Front-panel user controls include input level adjust, injection and mute level controls, high-frequency limiting, limiting/compression balance, noise output level and sensitivity adjustments. No back-panel controls or adjustments are necessary, which simplifies installation and operation.

One thing that has stood in the way of quality subcarrier transmission has been the lack of quality audio processing. In order to provide the necessary peak control for program audio and to maintain high-average modulation, the audio processing must be designed specifically for subcarrier signals and conditions. The audio frequency response must be limited to avoid crosstalk into the mainchannel audio. The audio level in the subcarrier channel must also be kept as high as practical to mask crosstalk from the main channel into the subcarrier.

Most stations, when faced with adding a subcarrier, simply use an old main-channel FM limiter tied to the generator input. These limiters are usually several years old and designed for  $75\mu s$  operation.

### Performance at a glance

- +1dB 70Hz to 4kHz
- Noise level 65dB below 5kHz deviation with 150μs pre- and deemphasis
- Accepts input signals from -30dBm to +10dBm
- Flexible user controls for audio processing
- Optional 0μs, 75μs or 150μs preemphasis
- Operating frequency changeable through internal strapping
- Built-in transmitter tuning aid

The unit solves these problems with a well-thought-out approach. The block diagram in Figure 1 illustrates the major elements of the generator. The input circuits contain both low- and high-pass filters to prevent out-of-band energy from upsetting the compressor and limiter circuits. After filtering, the signal is fed to a compressor for general level control. Audio then passes to the highfrequency limiter circuits. As in the compressor, front-panel adjustments allow the operator to tailor the sound of the signal as needed. Finally, the audio signal is safety-controlled by a broadband limiter that sets an instantaneous deviation limit by removing peaks exceeding a preset threshold.

The generator carrier frequency is crystal-controlled and adjustable by changing straps on an internal circuit card. The unit is capable of operating on any authorized subcarrier frequency. Even if a change in frequency is needed later, new crystals are not required.

The Sidekick provides inputs for telemetry as well as companding or encryption boards. The mother board is

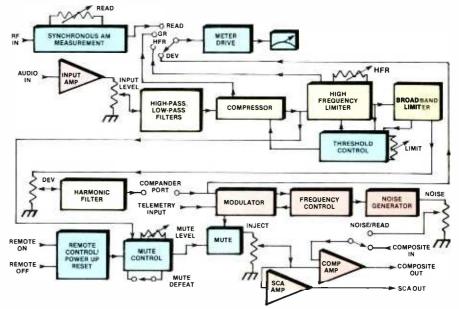


Figure 1. Block diagram of the Sidekick subcarrier generator.

Dick was director of engineering at KANU/KFKU, Lawrence, KS, when he prepared this report.

### The modular system for a transitional world . .



BC1115 Mono Mic-Line Input Module.

MTS, SAP, AFV, S-buss are now standard terms in today's audio world. Broadcasting techniques and systems are changing daily. Not since the introduction of color have the production, post-production and broadcast facilities faced such rapid changes in technology, and in day-to-day operational methods. Each facility and operator has a different requirement for systems and hardware.

Audio consoles for broadcast from other manufacturers have just been adaptations of their On-air or record consoles, or maybe they offered some custom modules to try to match a specific need. Obviously, this is not the best way — especially in a dynamically changing environment.

AMEK has applied their years of experience as console system builders to the problem.

The result is the BCII, AMEK's response to the needs of the contemporary broadcaster. The BCII is modular, both inside and out, with 3 different frame sizes offering up to 32 modules in any combination (16 positions in a 19" rack), offering almost limitless configurations. Stereo and mono inputs, electronically balanced in and out, and standard features such as AFV, 6 busses and the famous AMEK EQ sound set the AMEK BCII apart.

Keeping with AMEK's openended systems approach, the BCII is factory or field fittable with VCAs (mono or stereo), and all of the logic and control functions appear on "D" connectors with full CMX® and S-buss support available. The BCII gives you AMEK quality in a user customizable system at an affordable price. The BCII is truly the modular system for our

transitional world.








AMEK BCII 8/4/2

Distributed by:

AMEK CONSOLES INC., 10815 Burbank Blvd., North Hollywood, CA 91601 Tel: 818-508-9788 Telex: 662526 AMEK USA AMEK SYSTEMS AND CONTROLS LTD, Islington Mill, James St., Salford M3 5HW U.K. Tel: 061-834-6747 Telex: 668127 AMEK G




wired for the companding feature and merely requires the addition of the card and changing a few circuit board straps. The message card, as the company calls it, allows a user to easily adapt to any type of service that may come along.

From a maintenance standpoint, it would have been helpful if the printed

Actual demodulated composite baseband showing two subcarriers at 67kHz and 92kHz.

Interior view of the Sidekick generator.

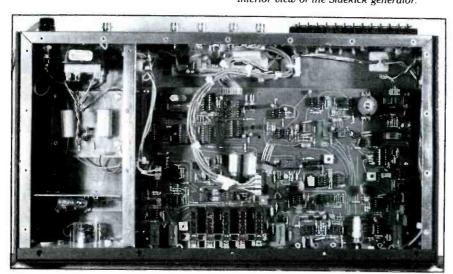

circuit boards had the component numbers silk-screened onto the board. The circuit is fairly complex and a screened board with component numbers would assist troubleshooting.

One point of caution: The manual indicates the unit should be returned to the factory for service; for many stations this might be difficult. In our tests, we did have one need to call the factory for assistance. Our request for help was treated promptly and the unit was returned to service that day. The unit is complex and modern test equipment will be needed if the station plans on performing its own maintenance.

### Tuning for performance

A unique method is used to adjust the transmitter for best subcarrier performance. Those engineers familiar with subcarrier transmission may remember the disappointment felt when first tuning on a new generator only to hear severe crosstalk from the main channel. The problem usually was because of improper transmitter tuning. Some transmitter manuals tell you to peak each stage of the transmitter. Although this may result in maximum efficiency, it also can spell disaster for subcarrier signals by narrowing the transmitter bandwidth.

One measure of how well a transmitter Continued on page 90



DON'T MISS THE 128th SMPTE TECHNICAL CONFERENCE AND EQUIPMENT EXHIBIT AT THE BRAND NEW JACOB K. JAVITS **CONVENTION CENTER** IN NEW YORK CITY FRIDAY, OCTOBER 24, 1986 **THROUGH** WEDNESDAY, OCTOBER 29, 1986


For information, write or call:



SMPTE Conference Dept. 595 W. Hartsdale Ave. White Plains, NY 10607 (914) 761-1100

TELEX: 910-576-2740 | Circle (65) on Reply Card



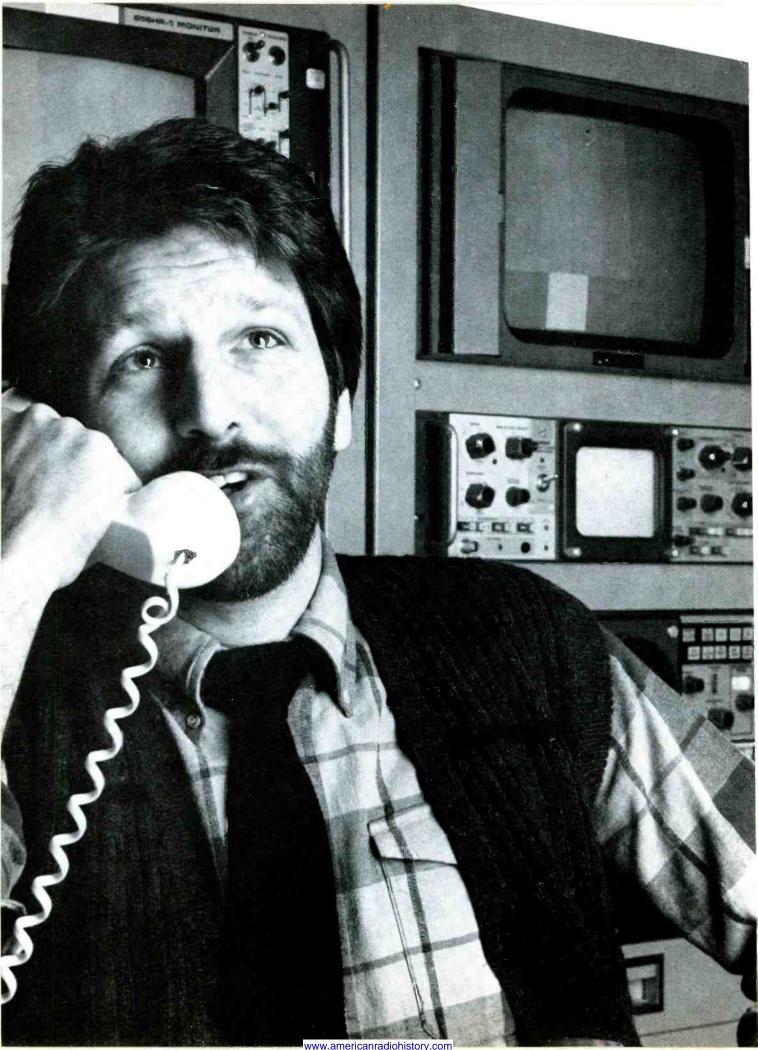

### "Hello, Sony? Merry Christmas. We need help."

(408) 946-9219.

This line is always open.

It connects you with Sony Broadcast National Emergency Technical Assistance. A computerized paging network linked to Sony field engineers across the continental U.S..

One call assures that a qualified Sony engineer will get back to you in minutes.

Not hours, not days.

Minutes.

It's only one of the extensive technical support services that come with every Sony Broadcast product. Services that include regional and dedicated technical assistance lines, 24-hour emergency parts service, and the most complete, centralized parts inventory in the industry—everything from systems modules to the humblest faceplate screw.

Round-the-clock technical support. One reason why Sony Broadcast has such a high percentage of repeat customers.

They know that the Sony Standard works.

Nights, weekends and holidays, too. **SONY** 

Continued from page 86

will pass subcarrier signals is the synchronous AM noise reading. This measurement should not be confused with the typical AM noise measurement made with the modulation monitor. The AM noise measurement required by the FCC uses a  $75\mu s$  de-emphasis circuit and effectively filters out the high-frequency components of synchronous AM noise.

To tune the transmitter, simply depress the *noise* button on the front panel and adjust the wideband-noise generator output level for 100% modulation. This noise signal is generated internally and substituted for the normal stereo generator signal when in this test mode.

Then, press the *read* button and adjust the transmitter for a minimum noise reading. The intent of this procedure is to broaden transmitter bandwidth. By slightly offsetting the resonant frequencies of successive stages (stagger tuning), transmitter bandwidth is broadened. The manual warns that some transmitters may not operate at rated efficiency when tuned in this manner. In such cases it will be necessary to properly determine the new efficiency factor after completing the tuning procedure.

A point of caution is in order. As we found out by accident, be sure your operators don't press the noise button during normal operations. Wideband

noise at 100% modulation is not something an audience appreciates.

#### On-air tests

The unit arrived at KANU tuned to 92kHz. After obtaining a temporary test authorization from the FCC, we demonstrated the unit's capabilities at the spring meeting of the Kansas Association of Broadcasters. Using our standard setup for 67kHz plus the Sidekick, we were able to demonstrate dual subcarrier operation at the meeting.

The audio processing used in the KANU 67kHz radio reading service is quite sophisticated. Audio is passed through a 3-band AGC processor, a fast 150µs limiter and finally a safety clipper circuit and low-pass filter. The average modulation is high, but provides excellent quality. The audio quality comparison between the Sidekick and our 67kHz system was different, but not greatly so.

The average increase in loudness was approximately 3dB to 4dB. According to the manufacturer, most operators can expect to see 10dB or more increase in loudness. To get an idea of how much improvement most stations would notice, we substituted an older mainchannel limiter for the 67kHz processor and compared it to the unit operating at 92kHz. Not only was the loudness difference quite apparent, but the difference in the sound quality was tremendous. A station using any old type of audio processing should expect to notice a real improvement in its subcarrier operations by simply replacing the generator and processor with the

During the test, two different programs were transmitted to the audience of station managers and engineers. Many remarked on how clean the 92kHz signal sounded. Turning the 67kHz carrier on and off produced no difference in the sound of the 92kHz signal and a similar check on the 92kHz signal did not affect the sound of the 67kHz program.

#### Measured performance

Several tests were conducted on the test bench in an attempt to measure the performance. The frequency response of three different subcarrier generators is shown in Figure 2. The upper trace is the frequency response of an older generator. The middle is the measured response of a current subcarrier generator. The lower is the Sidekick's frequency response. Notice how the unit's frequency response runs right out to 10kHz and the other generators fall off at various lower frequencies.

As shown in the top photo on page 86, a composite-baseband signal shows all components for monaural, stereo, 67kHz and 92kHz signals. The 92kHz signal skirts drop off nicely and do not interfere with the 67kHz signals. No noticeable crosstalk was detected in the 67kHz

Tired of going through contortions, not to mention half the contents of your tool box, to assemble a simple audio connector?

Then go for this: the Neutrik® Ag X series XLR cable connector. Assembly is so simple, you won't have to finnagle with so much as a set-screw.

X series connectors consist of just four parts. So you can count them...and just about assemble them...with one hand. In fact; you can save up to 50% in assembly time.

Of course, that wouldn't mean much if X series connectors didn't also perform. Their compact bodies mate perfectly with standard XLR connectors. An improved self-retention locking system means even better connections. They handle larger O.D. cables. And you can select a satin nickel or black chrome finish and either gold or silver contacts.

All in addition to conniption-free assembly.

Now. Wondering what to do with your free hand? Use it to call or write for more information... naturally. Kulka Smith, Inc., Sales Dept., 1913 Atlantic Ave., Manasquan, NJ 08736. (201) 223-9400. TLX: 244536.

## Neutrik®X Series connectors connectors without conniptions.



Circle (68) on Reply Card



Patchbays are a good idea, but they're not really cost-effective for small studios because they give you more jacks than you need.

But now, ADC's exclusive Video/Audio Modular Patchbay (VAMP) lets you custom-design your own bay. Our VAMP saves you money, because you can buy the exact number of video and/or audio circuits you need, and add circuits as your needs change. It saves time—to order modules, just call your local ADC distributor for fast delivery. And it saves space by letting you combine audio and video patching in a single bay.

VAMP audio modules feature ADC's exclusive QCP punchdown insulation displacement contacts for fast, durable terminations with no soldering or wire-stripping.

Video modules come with ADC's S.J2000 self-normalling jacks or a pair of CJ2011 single coax jacks. Each VAMP chassis holds up to 20 modules; mix or match audio and video modules to suit your needs.

For flexible audio and video patching with no wasted space or unnecessary costs, revamp your system—with ADC's VAMP.

New SAILS makes circuit designation a breeze.

Our exclusive Self-Adhesive Identification Labeling System (SAILS) makes circuit labeling easy and efficient. Each VAMP chassis comes with a sheet of form feed, computer-printable adhesive-backed labels. The unique polyester label material won't smear or yellow, is easy to write or type on and removes cleanly without tearing.

SAILS are over ½" wide, providing ample room for circuit designation.



The Panel of Experts

Telecommunications

49()() West 78th Street. Minneapolis, Minnesota 55435

Call (612) 893-3010 for the name of your nearest ADC distributor.

Circle (69) on Reply Card

www.americanradiohistory.com

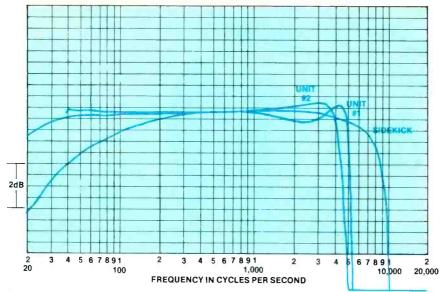


Figure 2. Measured frequency response of three representative subcarrier generators.

audio passband when the 92kHz signal was operating.

#### **Modulation levels**

Some stations express concern about the loss of main-channel audio with the addition of subcarriers. Under the FCC rules, a station can add two subcarriers, each operating at 10% injection, and modulate up to 110%. With this arrangement, the experts predict about a 1dB

loss in main-channel loudness. With only one SCA and the appropriate increase in total modulation, the loss is only about 0.5dB. It's doubtful this small difference would be critical, even in a competitive situation. If the station management expresses concern about this loss, tests can be performed with a simple audio pad switched in and out of the main audio channels to stimulate the loss in main-channel loudness.

Other concerns about subcarrier signals affecting main-channel audio are really moot points. With the advent of PLL receivers and better designs, receiver whistle problems have almost been eliminated. Stations that have been using subcarriers for many years can document the reduction in the number of complaints as listeners replace obsolete equipment with modern components.

Some operators may want to consider using their subcarrier channels for digital purposes. This particular version of the Sidekick is not designed for data use. The audio-processing section is not needed, and other parameters become important when data are transmitted. Stations interested in data transmission may want to look at generators specifically assigned for data transmission.

The Sidekick is an effective device. The integrated generator and audio processor provide the means for a quality subcarrier service.

Editor's note: The field report is an exclusive BE feature for broadcasters. Each report is prepared by the staff of a broadcast station, production facility or consulting firm.

In essence, these reports are prepared by the industry and for the industry. Manufacturer's support is limited to providing loan equipment and to aiding the author if support is requested in some area.

It is the responsibility of Broadcast Engineering to publish the results of any piece tested, whether positive or negative. No report should be considered an endorsement or disapproval by Broadcast Engineering magazine.



### COMREX EXTENDER—\$495!

Finally there's a frequency extender that's really affordable. And, it's a Comrex. Frequency extension is a way to send broadcast-quality program over a standard telephone line. It's an encode/decode system that restores the lower frequencies that the phone can't handle.

We've been building these systems for years, but a lot of people who should have been using them simply couldn't afford them. That's why we developed the Basic extender. Each component (encoder and decoder) sells for \$495, so your complete system is less than \$1,000.

The Comrex Basic may not offer some of the "extras" available on our other models. What it does offer is a distinct improvement in program quality sent over telephone lines.

Call Comrex for a demo tape, at **1-800-237-1776**. Or write Comrex Corporation, 60 Union Avenue, Sudbury, MA 01776. Tel (617)443-8811. TWX 710-347-1049.



**BUILT FOR BROADCAST** 

### Tracking down the sound Audio Analyzer UPA



### the high notes of our audio specialist:

- frequency range 10 Hz to 100 kHz, 3 Hz to 300 kHz (-3 dB)
- voltage range <10 μV to 300 V with 1 μV resolution
- distortion <0.003 to 100 % or -90 to 0 dB
- wow & flutter 0.003 to 5 %

Audio Analyzer UPA is the intelligent answer when you need a system-capable psophometer with integrated frequency counter. With options you can turn it into a complete audio test setup, with weighting filters for every application.

Write or call for full details of UPA Audio Analyzer



Rohde & Schwarz-Polarad, Inc., 5 Delaware Dr., Lake Success, N.Y. 11042 Tel: 516-328-1100 TWX: 510-223-0414

Circle (71) on Reply Card

### Field report I



### Gentner SPH-4 telephone interface

By Michael A. Golchert

The use of telephones in radio broadcasts is not new. For years, radio stations have used telephones for everything from news reports and talk shows to sports broadcasts. One would think that because the telephone is so important to many stations, everyone would know how to obtain the best audio from the telephone. That is not the case.

Last year, our station added a talk show to the format. Because the engineering department was concerned about carrying a call-in show with adequate voice quality, we suggested the station purchase a telephone interface unit. At first, there was objection to purchasing new equipment. After all, can't you just hook the telephone to the console? When the news department also expressed an interest in improving the quality of its recordings, station management decided to seriously consider solutions to the telephone interface problem.

#### **Options**

Fortunately, we had sufficient time to conduct a thorough investigation of the available products that would meet our needs. Basically, we needed an interface that would allow us to route a single caller to the air for discussions with the air talent. We did not need conferencing options or other complex functions, but we did need an interface with a shoutdown function so the host could control the program. Because we act as the heart of the Hilltopper Sports Network serving Western Kentucky University, we wanted an interface that would also allow us to clean up the sound of the network's sports broadcasts.

We soon discovered that most of the interface equipment fell into three price ranges: \$140-350, \$450-750 and more than \$1,000. Based on our needs, we decided to purchase the Gentner SPH-4 telephone interface. We felt that it offered all the features we wanted, without extra cost options that we didn't need.

Golchert is assistant chief engineer for WDNS-FM and WKCT-AM, Bowling Green, KY.

#### Installation

The connections to the telephone interface, as shown in Figure 1, are all straightforward, with one exception. For those stations without multichannel consoles, the creation of a *mix-minus* feed may pose a problem. The mix-minus feed is the audio that is fed back to the caller. This feed contains all of the broadcast audio *except* the caller's voice.

Although there are a number of ways to create the mix-minus audio, most of them require an additional audio channel in the console or an outboard amplifier. To keep the installation as easy and inexpensive as possible, we decided to use an old Collins tube-type remote amplifier. I'll admit it looks strange to see the old mixer placed next to modern broadcast equipment. For our purposes, however, it works nicely. The amplifier provides the line-level mixminus audio needed to drive the interface for coupling back to the caller. This configuration allows us to premix all of the audio except the spots before transmission to the main console on a remote input.

### Performance at a glance

- Frequency response: send input to mix output ±0.2dB 20Hz-20kHz; telephone input to system output ±2dB 300Hz-3,200Hz
- System hum and noise: -60dB or lower
- Distortion: 1% THD maximum
- Caller-control range: 0dB to -50dB maximum override, internally expandable
- Squelch sensitivity: adjustable to 30dB below normal send level
- Squelch release time: 100ms-400ms, adjustable
- Speaker dimming: 0dB-22dB, internally adjustable

### Connecting the phone

The most time-consuming part of the installation process centered on connecting the interface to the telephone system. The process involved disassembling the telephone to find the call director output. This is the output from the telephone push-button assembly. We also had to locate the A-lead contact on the call director output. The manual suggests that you simply look around inside the telephone for these connections. However, do you have any idea of how many combinations of connections are possible on a standard 5-line key telephone? After many wrong guesses, the correct connection points were located inside our phone. (For more infor-


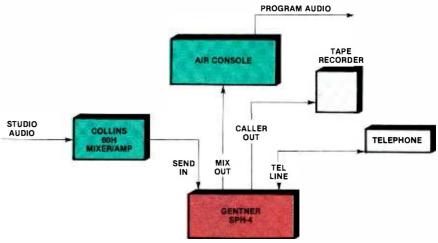


Figure 1. Interconnecting the SPH-4 is easy and straightforward.

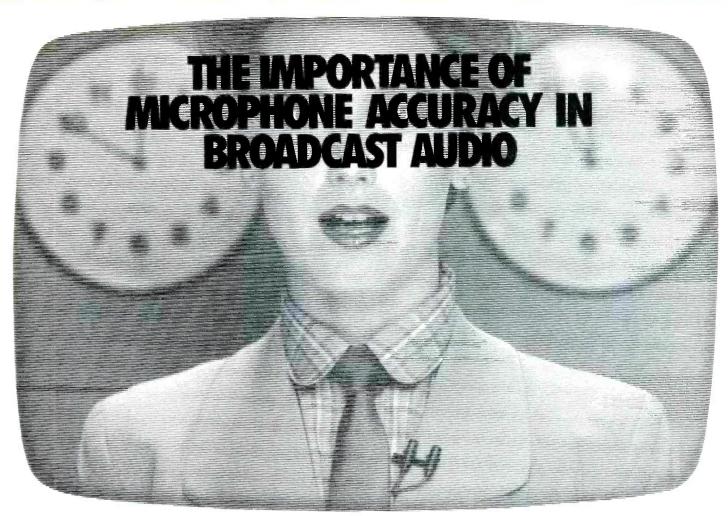

A distinctive voice remains as important to a successful broadcast announcer as a recognizable visual presence. Microphones are the critical first step in the broadcast audio chain. Acting as a highly accurate sound "lens," they must be sensitive enough to faithfully transmit all of the subtle personal nuances and inflections that distinguish one announcer's voice from another.

Today's sophisticated broadcast productions demand more from microphones. Differences in relative mic performance are more readily apparent, and an inferior microphone stands out like the proverbial sore thumb.

In the most basic sense, any microphone need only capture the sound source exactly and convert it to electrical energy — no more, no less. Obviously, microphones necessarily have different characteristics based on differing transduction technologies and designs. But at Beyer, we believe that the superiority of a microphone is in large part based on how accurately it transduces the source material — with no excuses based on

size or applications.


In broadcast, Beyer's concept of "accuracy" means the difference between a microphone that can focus in on a specific voice and produce a totally realistic, professionally acceptable performance, and a mic that simulates a performance by only capturing the bare outline or "silhouette" of an announcer's voice. We've dedicated the most complex and sophisticated technology in existence to reinforce the truth of this basic premise.

Sensitive and natural-sounding, the MCE5 picks up the "whole truth" of audio broadcast sound because of an unusually wide frequency range (20Hz to 20kHz) and exceptionally fast transient response for any mic, let alone one that is virtually invisible on camera. Because the MCE5 has a uniform omnidirectional pickup pattern, mic placement is not critical and the announcer's head can move without going "off mic." Handling noise is kept to an absolute minimum so the MCE5 picks up the voice, not the rustling sounds of the announcer's expensive silk tie.

The MCE5 is available in various terminations for the widest range of broadcast applications including wireless. Underscoring our longterm commitment to the broadcast industry, the MCE5 is one of a family of reliable Beyer broadcast products designed for ENG, EFP and Film/Radio/Video studio production. It has been widely adopted by discerning broadcast engineers in the U.S. and Europe.

For those engineers who feel that announcers' voices should be as recognizable as their faces, the Beyer MCE5 proves that this level of accuracy exists in a lavalier design.

Beyer Dynamic Inc., 5-05 Burns Avenue, Hicksville, NY 11801.

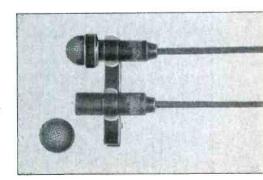

Circle (72) on Reply Card

### Exclusive, triple patented dynamic cap and coil analyzing . . . guaranteed to pinpoint your problem every time or your money back



with the all new LC75 "Z METER 2" **Capacitor Inductor Analyzer** Patented

The "Z METER" is the only LC tester that enables you to test all capacitors and coils dynamically - plus, it's now faster, more accurate, and checks Equivalent Series Resistance (ESR) plus small wire high resistance coils.

Eliminate expensive part substitution and time-consuming shotgunning with patented tests that give you results you can trust every time. Test capacitor value, leakage, dielectric absorption, and ESR dynamically; with up to 600 volts applied for guaranteed 100% reliable results — it's exclusive — it's triple patented.

Save time and money with the only 100% reliable, in- or out-of-circuit inductor tester available. Dynamically test inductors for value, shorts, and opens, automatically under "dynamic" circuit conditions.

Reduce costly parts inventory with patented tests you can trust. No more need to stock a large inventory of caps and coils. The "Z METER" eliminates time-consuming and expensive parts substituting with 100% reliable LC analyzing.

Turn chaos into cash by quickly locating transmission line distance to opens and shorts to within feet, in any transmission line or cable.

Test troublesome SCRs & TRIACs easily and automatically without investing in an expensive second tester. The patented "Z METER 2" even tests SCRs, TRIACs, and High-Voltage Diodes dynamically with up to 600 volts applied by adding the new SCR250 SCR and TRIAC Test Accessory for only \$148 or FREE OF CHARGE on Kick Off promotion.

To try the world's only Dynamic LC Tester for yourself, CALL TODAY, **WATS Free**, 1-800-843-3338, for a FREE 15 day Self Demo.



Call Today Wats Free 1-800-843-3338

### SENCORE

3200 Sencore Drive Sioux Falls, SD 57107 605-339-0100 In SD Only

innovatively designed with your time in mind.

Circle (73) on Reply Card

mation on telephones, see the related article, "How the Phone Works," page 99.)

We use only two of the SPH-4 outputs. The balanced  $600\Omega$  output feeds the main console. The unbalanced output, which contains only the caller's audio. feeds a tape recorder in the newsroom. This feature allows the news department to record actualities with ease and provides a real improvement in audio quality. A balanced caller audio output and a high-level speaker feed also are available.

### Adjustment

The initial setup and adjustment posed a few problems for us. It took some time to properly adjust the null control. We were finally able to obtain a trans-hybrid of approximately 22dB. The interface contains a test generator for use in the nulling process. However, using the generator only caused some problems later on.

Setting the send level was difficult. After a lot of experimentation, we discovered that the proper level for the send input was -17dBm. The squelch control also was difficult to adjust. The control is a multiturn pot and sets the level where the speaker squelch circuit takes effect. The exact level needed is more a matter of trial and error, rather than any exact scientific setting. Because several departments wanted to use the interface, a compromise had to be struck in all of the settings. Finally, after a lot of test calls and different adjustments, we decided on the proper settings for these controls in our environment. Once everything was set up, the system performed beautifully.

### Advantages

The improvements in the sound quality provided by the telephone interface are immediately obvious to even the untrained listener. The typical telephone line background noise is eliminated, providing a clean audio signal. The device couples the full spectrum studio audio and the filtered caller audio onto the output bus. Although the difference between studio and caller audio is noticeable, there is no longer the drastic quality difference typical of many stations.

The caller's audio level is adjustable on the front panel. This feature ensures that every caller is mixed with studio audio at the proper level. The interface also incorporates a shout-down feature. When activated, the caller's audio is ducked under the studio audio. This makes it easy for a host to control any conversation, no matter how long-winded or boisterous the caller may be.

### Agile Omni, the industry's most advanced receiver designed by the most relied upon name in the business...Standard.

other receiver.
Standard designed it for cable TV operators, broadcasters, CATV, SMATV, and business and special teleconferencing networks—now and in the future.

An onboard microprocessor permits selection of any band available from domestic satellites, including the 32-channel ANIK C2. Channel tuning provides direct reading of the transponder-assigned channel number and a format control permits selection of six frequency band formats-24-channel C-band, SBS/ **USAT** and Spacenet already installed. Select channel and format, and the microprocessor controls frequency, channel spacing, transponder bandwidth, audio

frequency and bandwidth, and antenna and video polarity—automatically.

Omni's flexible design can handle up to three separate subcarriers including stereo programming or data. Omni also will accept descrambling modules—eliminating the need for expensive add-on descramblers.

For CATV and SMATV applications, severe microwave terrestrial interference is minimized by optional internal SAW notch filters, automatically programmed to switch in. A 30 MHz low DG/DP LC bandwidth filter is standard, and a second internally installed optional filter of 18, 22, 26, or 36 MHz bandwidth can be controlled by the microprocessor, or manually switched.

Standard's proven RF

loop-thru circuitry and blockdown conversion technology combine, with better image rejection and lower differential gain and phase, to provide excellent video performance. C/N threshold is an impressive 6.5 dB at the wide 30 MHz bandwidth.

Agile Omni is an affordable, flexible receiver designed to keep you in business, a commitment Standard backs with its unique 5-year warranty program. Contact us for further information.



P.O. Box 92151 Los Angeles, CA 90009-2151 Toll free 800/243-1357 (In Calif. 800/824-7766, ext. 275)

Engineered to a new Standard




#### Performance


The unit's distortion is specified to be 0.1%. Because of the phase shifting network used in the hybrid, I was unable to verify this figure. The frequency response did meet the manufacturer's specifications. However, it appears that the frequency response is dependent on the incoming level. With the send level we use, -17dBm, the unit's frequency response does not meet the specifications. It is, however, acceptable for our application. The main reason we are not using a higher send level is that it would require external padding before the input to our main console and the newsroom recorder.

The telephone interface has been in service for almost a year with no problems. All of the ICs used in the device are socket-mounted, so if they fail, replacement will be easy. The back panel contains a multiple connector for those installations that require remote-control operation. The audio inputs and outputs are available on the connector.

Although the unit is exceptionally easy

Figure 2. Block diagram of the Gentner SPH-4.

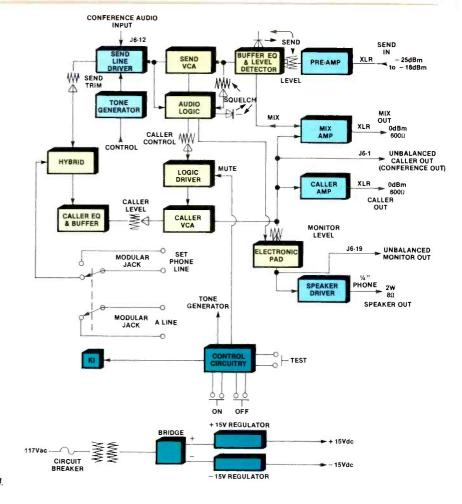

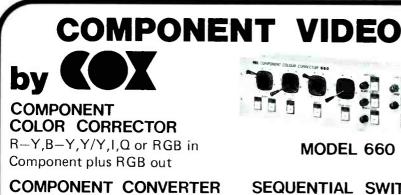

Model 732 RGB to R-Y,B-Y,Y Model 733 R-Y,B-Y,Y to RGB

3 converter boards in 1 frame

MODEL 660

### SEQUENTIAL SWITCHER

Model 127 - Provides parade display of components on standard waveform monitor

**EXCLUSIVE NORTH AMERICAN DISTRIBUTOR** 

### broadcast video systems

1050 McNicoll Avenue, Agincourt, Ontario M1W 2L8 Telephone (416) 497-1020 Telex 065-25329

Circle (75) on Reply Card

Want more information on advertised products? Use the Reader Service Card.



Circle (76) on Reply Card

to use, I believe there is one minor design flaw that could be easily corrected. The caller control that is used to shout down callers also contains a test generator. If the control is rotated completely counterclockwise into the detent position, a 1,200Hz sine wave is placed on the output bus. The tone is normally used for alignment purposes. On several occasions, this tone has been inadvertently activated during a recording or live program. I believe this function would be better served by a toggle switch on the back panel.

Our staff is happy with the SPH-4 telephone interface. Once users are properly trained to use the device, few operational problems occur. The improvement in our telephone recordings and talk programming has been noticed by listeners. Given the price/performance ratio of the interface, we made a good choice.

Editor's note: The field report is an exclusive BE feature for broadcasters. Each report is prepared by the staff of a broadcast station, production facility or consulting firm.

In essence, these reports are prepared by the industry and for the industry. Manufacturer's support is limited to providing loan equipment and to aiding the author if support is requested in some area.

It is the responsibility of Broadcast Engineering to publish the results of any piece tested, whether positive or negative. No report should be considered an endorsement or disapproval by Broadcast Englneering magazine.

### How the phone works

Although every engineer uses the telephone, few really understand how it works. A simple way to define the telephone line is to refer to it as a 2-way, 2-wire transmission line. These two wires act as both transmission and reception paths.

The two wires used in the telephone path are called the tip and ring, abbreviated T and R. These names originated in the early days of telephone technology when operators used patch cords to tie calls together. Tip and ring referred to the physical position on the patch plug of the two signals. Because the tip was the part most likely to be touched by the operator, it was made the grounded part of the plug. The term ring, in this usage, has nothing to do with the ringing mechanism of the telephone.

When the customer's telephone line (tip and ring) finally connects at the central office (C.O.), the 2-wire system is converted to a 4-wire system. Although they are thought of as a single path, in reality, two separate 2-way links are involved in each call. After passing through a hybrid, the two separate audio signals are connected to either a transmitter or receiver, as appropriate. The process is repeated at each end of the telephone calling locations.


Control voltages


The C.O. places a dc voltage on the tip and ring leads of each telephone. This dc voltage is usually provided by a trickle-charged battery. The battery keeps the telephone system working during power outages. The battery voltage varies from 20Vdc to approximately 48Vdc with the tip and ring in an on-hook (no load) condition. This voltage provides the required dc for the carbon mics. Some modern electronic

phones also use this dc voltage to power their internal circuitry.

When someone calls, a ring voltage of 105Vac is coupled to the two wires leading to your phone and in turn, the ringer in the telephone. When you pick up the handset, the switch-hook disconnects the ringer and connects the telephone network to the telephone line. This process is known as terminating the line. Anytime a dc path of  $600\Omega$  or less is connected across the tip and ring, the line will be terminated and the call will be answered.

When the call is completed, the reverse sequence occurs. After the C.O. senses a disconnect (a change in the load on the tip and ring) it usually reverses the dc voltage on the line. Some systems simply provide a dial tone without dc reversal. This change stops the long distance billing and gives the caller a dial tone.

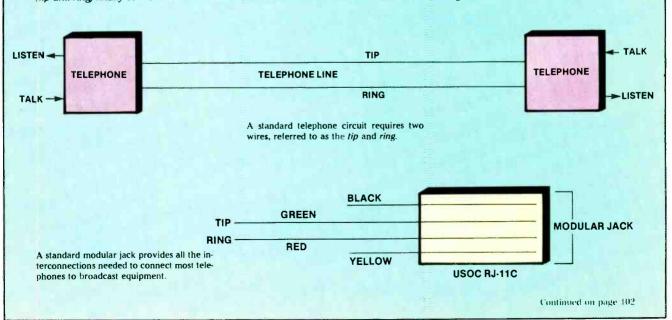

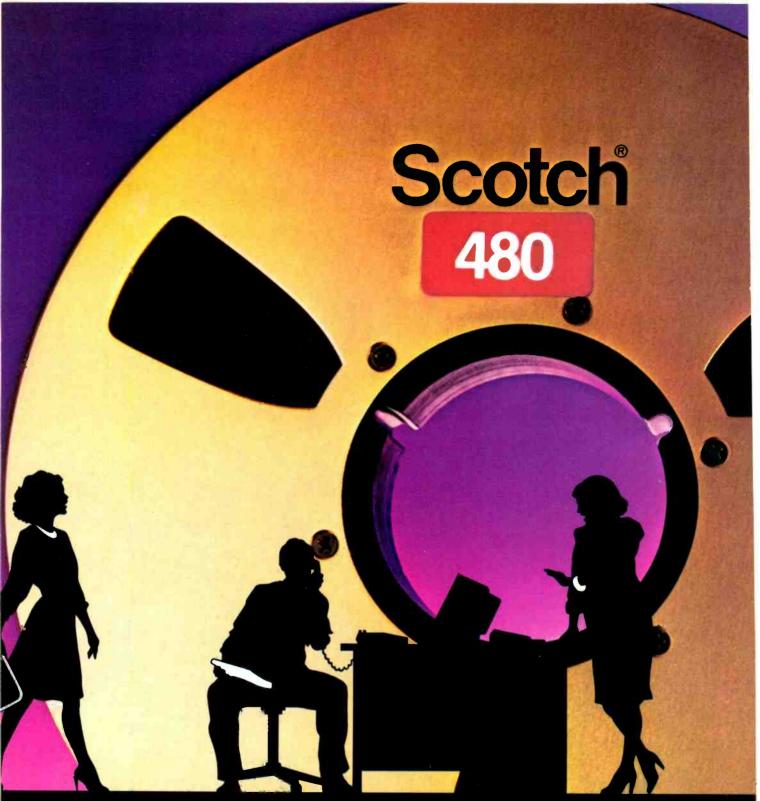

One Tape for True Picture and Sound.

To all those who have to get it on the air without fail, you need a tape you can turn to without fear. 3M 480 1" Videotape. Designed to deliver exceedingly low video dropout levels—and extremely high audio ficelity. To give you a true picture—and true sound.

# TO THOSE WHO ARE ON THE LINE TO GET IT ON THE AIR, ONE TAPE IS TRUE.



One Tape Stands True.

Getting you on the air without fail...that's what we've been doing since we invented videotape 30 years ago.

That's why we stand by you-with the largest support force in the field.


And we stand behind you-with some of the most advanced research in the industry. All to keep our standing—as number one in the world of the pro.

Scotch MEDIA PRO

NUMBER ONE IN THE WORLD OF THE PRO

Circle (77) on Reply Card

3M

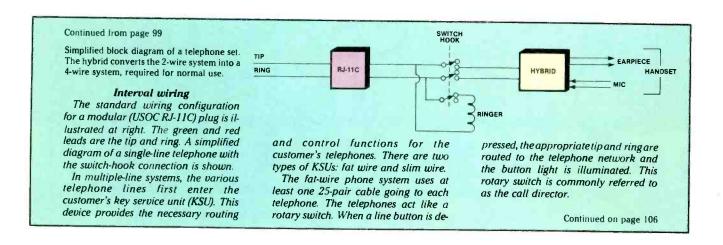



■ Your station spent a lot of money for that supersophisticated microphone, not to mention George Goldenthroat's salary and benefits. So, does it make sense to underwhelm your audience with mediocre mic processing?

Our Model 400 microphone processor offers a preamp section superior to that found in your on-air audio console. After all, we revolutionized the industry by introducing low noise, low distortion, transformerless preamp technology way back in 1977. There's an on-board 3-band E.Q. section to emphasize your on-air personality's performance. For dramatic dynamic range control, a compressor is included with a "smart" interactive expander to cancel noise level artifacts. For further enhancement of your signal, other processing effects, such as delay or reverb, may be inserted in the signal path via balanced line-level patch points. And, sibilance problems will never lead to listener fatigue, because they are handily eliminated with the Model 400's de-esser.

All of the Model 400's controls are user-friendly and can be readily comprehended. Gain reduction and true vu metering offer visual confirmation of dynamics processing, as it takes place. The 400 is designed to be interfaced into your system in a matter of minutes.

So ... BE VOCAL ... DEMAND THE BEST ... Demand the Model 400 Mic Processor from . . .

VALLEY PEOPLE INC. • P.O. Box 40306 • 2817 Erica Place • Nashville, TN 37204 • (615) 383-4737 • TELEX 3785899 • NASH AUDIO VALLEY PEOPLE INTERNATIONAL • C/O Gotham, AG, Regensdorf Switzerland • Telex 59222 gothm ch, Tele 0041-1-840-1044



Provide impressive on-air sound for even the most discriminating listener at an unbelievable price/performance relationship.

### The Best of Both Worlds

The ITC "Component System" combines the quality of digital source material with *all* the operational flexibilities of an all-cart format. Simply record from a compact disc onto a ScotchCart®II broadcast cartridge using a 99B master recorder with ELSA, then play back on a DELTA reproducer!

### Separately, These ITC Components are Impressive, Together They're Awesome!

Cartridge, tape and machines have been designed by a single manufacturer to compliment each other like never before and produce uncompromising audio quality.

- 1. 99B Master Recorder—Loaded with features
- 2. ELSA—A patented automatic cartridge preparation system
- DELTA Reproducer—Outstanding audio performance in a reliable, mid-priced cartridge machine

4. ScotchCart®II Broadcast Cartridge—Capable of frequency response equalling professional reel-to-reel performance

Allow ITC's "Component System" to provide your facility with the operational flexibilities of an all-cart format while you offer your listeners impressive onair sound they are sure to love.

When newer technology emerges, it will come from International Tapetronics Corporation/3M, "The Leader in Reliability and Service."

Call today to discuss financial options and the unbelievable price/performance benefits of the ITC "Component System." In the U.S., call toll-free 800-447-0414, or collect from Alaska or Illinois 309-828-1381. In Canada, call Maruno Electronics, Ltd. 416-255-9108. In most countries outside the U.S. and Canada, information on ITC equipment can be obtained through local distributors.

### International Tapetronics Corporation/3M

2425 South Main Street P.O. Box 241 Bloomington, Illinois 61702-0241



## MAC



AG-6810 VHS Hi-Fi video recorder. Perfect for entertainment or hi-fi dubbing. Dynamic range is greater than 80dB.

### BROADCASTING



AG-6300 High performance VHS recorder and editing source deck. Twoframe editing accuracy. Inputs for time base corrector.

### HOSPITAL



AG-6300MD Designed for medical applications.

VHS recorder conforms to UL-544 standards. Ext. sync in. Time code connectors.



AG-6200 High performance, general purpose VHS recorder. 34-pin parallel remote interface.



AG-6200E Multi-format VHS recorder for worldwide use. DAL COOK and 4.43 MHz, NTSC. 14-step dial search.



AG-6100 VHS playback deck. 14-step Auto-repeat

### PANASONIC HAS A PROFESSIONAL VIDEO DECK FOR EVERY PROFESSION.

From medicine to music. From New York to London. Whether it's industrial training, hi-fi sterec duplicating or international business communications, there's a Panasonic® 6000 Series VHS deck designed to meet your specific professional needs.

For long-term stability, all 6000 Series professional decks have a sturdy aluminum die-cast chassis. And a heavy-duty head structure to deliver virtually noiseless video images for special effects.

The 6000 Series also includes all the inputs and ouputs professionals demand. Like 8-pin video connectors for direct single connection to a monitor. BNC connectors

for easy interface with other video components. And time code connectors for advanced editing applications. Plus versatile remote control capabilities for a host of applications.

Still, with all the 6000 Series has going for it, Panasonic knows a professional deck is only as good as the professional support behind it. That's why you'll find regional offices each with a staff of engineers to assist you with matching components for your specific system. And technical service for installation and instruction. So whatever profession you're in, take a look at the video decks designed for your profession. The Panasonic 6000 Series.

For more information, call your nearest Panasonic regional office. Northeast: (201) 348-7620. Midwest: (312) 981-4826. Southeast: (404) 925-6835. Southwest: (214) 257-0763. West: (714) 895-7200. Northwest: (206) 251-5209.


Panasonic Industrial Company


Circle (80) on Reply Card


A slim-wire phone system (usually referred to as a digital system) accomplishes the same task with four or fewer pairs of wires. A microprocessor in the electronic key service unit (EKSU) electronically provides the same functions described previously. When a line is requested by the telephone, the telephone sends a digital signal to the microprocessor telling it what line to route to the phone. If the line is available, the EKSU switches the tip and ring to the phone.

Most telephone interface devices can be interconnected to either type of telephone system. Before you purchase a system, contact the manufacturer to find out if optional interfaces or couplers may be required. Some telephone interface units are universal and may not require any additional couplers, but check to be sure.


A digital slim-wire telephone system usually accomplishes the same task with four or fewer pairs of wire.

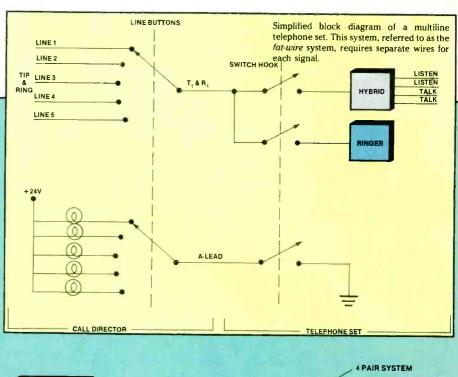




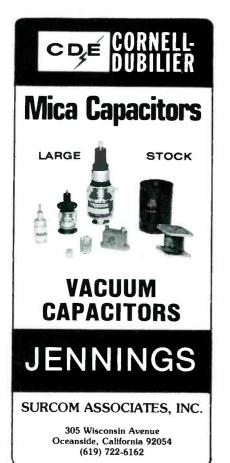






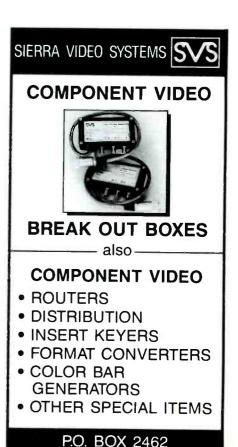

(916) 273-9331 Circle (102) on Reply Card

GRASS VALLEY, CA 95945

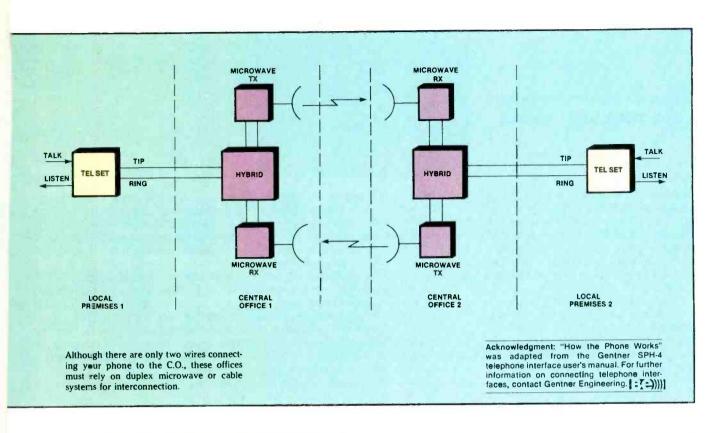

# THE PERFORMANCE CRITERIA . . . MODEL TSG-375 SMPTE BARS FOR TODAY'S TELEVISION SYSTEM 24 test signals for rapid and critical system measurements. Complete RS-170A Sync Generator for accurate system timing. Countdown Generator, Source I.D. & safe areas for production use. SIGMA ELECTRONICS INC. **SPECIFY SIGMA** 1184 ENTERPRISE ROAD, P.O. BOX 448 EAST PETERSBURG, PA 17520-0448 (717) 569-2681

# Station-to-station

## Remote control system operates unattended

By P. Michael Zeimann

Recent FCC rule changes have drastically altered the way broadcast engineers look at remote control. In the past, most stations relied on dedicated hardwired loops between the transmitter and studio sites. Transmitters even had (and still have) failsafe interlocks to turn the carrier off if the loop failed.

Today, deregulation is the key word. Stations have more freedom to develop remote-control systems that meet their particular needs. Stations are still required to monitor the transmitter and be able to turn it off if something goes wrong, but it isn't always necessary to pay the telephone company for a dedicated loop to the transmitter site.

#### Alternative solution

Our station, WKDN-FM, needed to modernize its remote-control system. We also wanted to incorporate some computerlike features. Although there are systems available that provide computer features such as automatic logging and alarm indications, they were too expensive for us.

Personal computers are now common equipment in broadcast stations. They are no longer the mystery device they used to be. Many engineers know how to program them, and even more importantly, interface them to the real world.


We decided to use this technology and develop our own computer-based remote-control system. The system is designed around a Commodore 64 computer and its related equipment. Almost any computer can be used as long as you understand the principles of interfacing.

In addition to the computer, we needed an interface device. The Innovative Technology 1020 interface board provided the missing link for our system.

#### Features

The remote-control system performs many functions. It monitors and controls our station's transmitter and provides a printed log of transmitter readings and alarm conditions. It also monitors various functions such as overmodula-

Ziemann is station manager for WKDN-FM, Camden,



tion, tower lights, building security and the EBS receiver. The system provides both audible and visual indications when any monitored function is out of tolerance. And, more importantly, it allows WKDN off-premises unattended studio operation from midnight to 6 a.m.

The computer remote-control system meets all of the requirements of the FCC. By using a dial-up telephone line and a modem, the off-premises terminal can access the transmitter (by way of the TFT remote control) at any time.

It's important to note that this system is not an automation system. It functions only as a real-time remote-control system. All programming is controlled by another device at the studio.

#### System function

The host computer (studio) calls the offpremises control point (terminal) every two hours. After the call is completed, the host computer reports on readings and status conditions at the transmitter. This sequence takes place automatically. The off-premises terminal operator does not need to take any action if no alarms occur at the transmitter.

If an alarm occurs, however, the host computer immediately calls the terminal computer and reports it. The terminal operator is immediately notified by an audible warning and display on the computer screen. The operator can reset the alarm or take other precautionary or corrective action.

The computer system automatically performs many scanning functions each minute, thereby ensuring timely transmission of important information back to the studio. The host computer continually monitors and controls the transmitter and prints a record of readings and alarm conditions. Any reading exceeding a preset limit, either high or low, activates

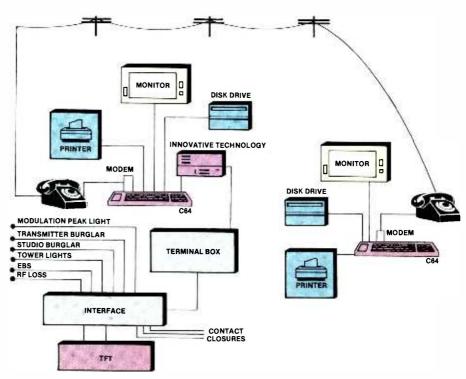


Figure 1. The WKDN transmitter can be controlled from an off-premises location through the use of an inexpensive computer.



Hector Munoz, Distribution Services Manager

# "Our purpose is to keep you on the air.

Our extensive inventory of broadcast tubes, RF transistors and related components ensures delivery of the product to you on time—even if I have to run the package to the airport myself. Last year our company made over 7500 overnight deliveries, so we take emergencies seriously!"



\$30 Million Inventory— 98% Same Day Shipment



Technical knowledge to help you save time and money by choosing the right component.



PRODUCTS: Cathode Ray Tubes • Diodes • Klystrons • Monitor Tubes • Plumbicon® Tubes • Receiving Tubes • RF Ceramic Capacitors • RF Transistors • Saticons • Solid State Replacements • Transmitter/Power Tubes • Tube Sockets • Accessories • TV Linear Devices • Vacuum Capacitors • Vidicons • Vistacons

MANUFACTURERS: Acrian \* Amperex \* Cetron \* EEV \* Eimac \* GE \* Hitachi \* ITT \* ITT Jennings \* Machlett \* National \* PhiHips \* RCA \* Raytheon \* Thomson CSF \* Varian \* Westinghouse

## 800-323-1770

Circle (82) on Reply Card

# Richardson Electronics, Ltd.

**Broadcast Division**—Calvert Electronics, Inc.

Convenient Sales Offices: Franklin Park, IL • Woodland Hills, CA • Belmont, CA • Dallas, TX • Norwell, MA • Rockville Centre, NY • East Rutherford, NJ • Winter Park, FL • Brampton, Ontario, Canada • Lincoln, England • Gennevilliers, France

www.americanradiohistory.com

# The SSL Stereo Video System

#### The Practical Standard For MTS Production

Before and beyond the transmitter, Multichannel Television Sound is an art. In the studio and post-production suite, the creative use of stereo can do as much or more than lighting, lensing, colour and video effects to give depth, impact and immediacy to the television picture. It quite literally adds an entirely new dimension to the viewing experience.

In stereo, television is a whole new ball game — or newscast, or series, or advert, or sitcom, or special. Because stereo is both natural and compelling, the programming possibilities are as broad as the imagination and skills of today's sound designers. Technical limitations and the constraints of time are the only obstacles. And that's where SSL can help.

Our SL 6000 E Series Stereo Video System handles complex MTS production with unrivalled ease and efficiency. Designed to simultaneously speed and enhance all aspects of television audio production,



the SL 6000 E Series makes innovative stereo programming practical on a daily basis.

Only SSL has triple stereo mix buses for stereo music, dialogue and effects, plus rapid mix-minus matrixing for Second Audio Program creation. Only SSL provides compressor/limiters, parametric equalizers, expanders and noise gates on every channel - plus balance and image width controls for all stereo sources. And only



SSL provides such time-saving operational features as patchfree audio subgrouping and pushbutton signal processor routing. For post-production efficiency, even the multitrack electronics remotes are built right in. And that's just the new line standard equipment!

Options include Total Recall<sup>™</sup> – an SSL exclusive, completely independent of the audio path, which allows any operator to recreate the most intricate console setups for any programme with rapid accuracy, week after week. Programmable dynamic stereo equalisation and panning may also be added, along with

Figure 2. Block diagram of the control system. The only complex device is the Innovative Technology interface board.

an alarm and is printed on the log.

All important readings and alarms are displayed in color on the host CRT for easy viewing. The log is automatically printed at regular intervals and a selfcorrecting clock permits programmable

As a final backup, during hours of unattended operation, the host computer continually resets a watchdog timer connected to a Sensaphone. If the computer crashes for any reason, or is unable to access the off-premises terminal, the Sensaphone first calls the off-premises remote-control location and then local station personnel.

#### Design

In order to implement this project, the station's normal remote-control system must be capable of external control. In other words, the computer system actually controls the remote control. If your remote control cannot provide this feature, alternatives must be investigated.

The basic system diagram is shown in

Figure 1. Wiring is not critical, but observe good grounding practice. You will need to construct a rack-mounted interface box. Mount this as close to the remote control as possible to avoid lightning-induced transients. If the computer is located more than five feet away, you should use another terminal box and shielded cable. (See Figure 2.)

Because of the product-specific nature of the interface, no schematic drawing is shown. However, armed with information from your remote-control manufacturer and the Innovative Technology schematic, you should be able to interface the system to your remote control.

#### How it works

The key to the system is the capability of the regular remote-control system to be controlled by another device. In our case, the TFT 7610 remote control provides both BCD latched outputs and TTL level inputs. This permits the computer to control the remote-control unit. The Innovative Technology board converts the control signals from the Commodore


to standard TTL level signals for the 7610.

Information from the transmitter site is communicated back to the studio over telephone lines. The remote control outputs the readings on the back panel for connection to the IT board and the computer. This connection allows the computer to read all of the necessary transmitter readings through the 7610.

When the computer needs to control the transmitter, it does so by outputting a signal to the IT board. The IT board converts these signals into standard TTL levels, which are communicated to the remote control for implementation.

After the hardware is assembled, you will need to tackle the software problem. The BASIC program is several hundred lines long. A simplified flow chart is shown in Figure 3. For a requested Ennis Foundation donation of \$5, a complete hard copy of the program is available from the Society of Broadcast Engineers, 7002 Graham Road, Suite 118, Indianapolis, IN 46220.

The program also is available as an

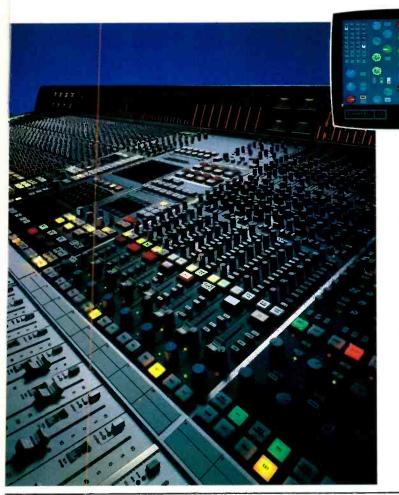


multi-repeatable Events Control, Automatic Dialogue Replacement, and centralised command of up to five synchronised audio and video machines. All of this is thoroughly integrated with the SSL Studio Computer the world's number one choice for mixing automation.

Best of all, the SSL Stereo Video System is not a hasty revamp of an old mono design. Nor is it an experimental project in search of a guinea pig. It is a practical, reliable international standard for advanced television audio production - proven in well over half a million hours of network and independent studio and mobile operation in Great Britain, Japan, Germany, Scandanavia, Australia, Canada and all across the United States.

Take advantage of our experience. Call or write today for a free 40 page colour brochure describing the operation and applications of the SL 6000 E Series Stereo Video System. If your station or facility is contemplating an upgrade to full MTS production capabilities, we'll be happy to arrange a complete demonstration. And be sure to ask about our training programmes.

# **Solid State Logic**

Begbroke, Oxford, England OX5 1RU • (08675) 4353 200 West 57th Street • New York, New York 10019 • (212) 315-1111 6255 Sunset Boulevard • Los Angeles, California 90028 • (213) 463-4444 Circle (83) on Reply Card

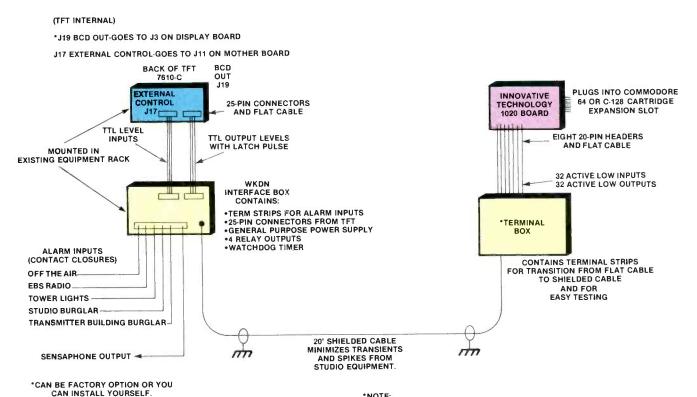

SHIELDED CABLE AND TERMINAL BOX IS NOT
NECESSARY IF COMPUTER IS LOCATED WITHIN APPROXIMATELY
5 FEET OF TFT REMOTE UNIT. FLAT CABLE FROM INNOVATIVE TECHNOLOGY BOARD COULD GO DIRECTLY TO THE INTERFACE BOX.

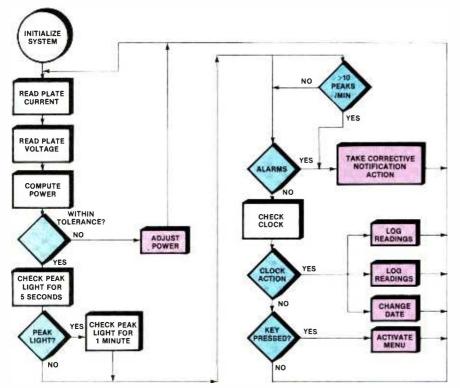



Figure 3. The computer program flow chart is simple. However, the actual control sequence and error checking routines require detailed programming.

ASCIII file from the Broadcasters Database (BDB). If you have a membership in BDB, the file can be downloaded directly into your computer. You can contact BDB at 3935 Westheimer, Suite 305, Houston, TX 77027; 713-623-4011. If you download the program from BDB, it will in turn notify SBE for donation purposes. Your support of these programs helps ensure that they will continue to be made available to BE readers.

The system works effectively for our station. It permits us to provide our audience with 24-hour operation without the expense of hiring full-time personnel just to monitor the transmitter. In our case, sister station WFME, Newark, NJ, is the off-premises terminal location and monitors our air signal and computer alarms with another C64 computer and modem. You may wish to make similar arrangements when implementing this type of system.

Editor's note: Zeimann presented a paper on the implementation of this remote-control system at the 1986 NAB engineering conference. Copies of the *Pro*available from the NAB Science and Technology Office, 1771 N Street NW., Washington,

## **HOW WOULD YOU LIKE THIS IN YOUR SWITCHER?**

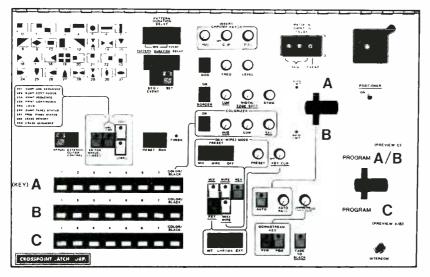

**Model 6109** 

32 PATTERNS PATTERN MODULATOR **RGB CHROMA KEYER** TRUE POSITIONER TWO FADER ARMS **DOWNSTREAM KEYER FADE TO BLACK** \$7240

with options for SECOND CHROMA KEYER (RGB or Encoded) STEREO AUDIO MIXER **GENLOCK SYNC GENERATOR** 

AND THE ABILITY TO UPDATE AT ANY TIME TO A POWERFUL PROGRAMMABLE AND EDITOR CONTROLLABLE SWITCHER WITH DISC STORAGE?

400 EVENT REGISTERS IN 100 PROGRAMMABLE SEQUENCES.

ALL ANALOG FUNCTIONS CAN BE PROGRAMMED FOR SMOOTH SIMULTANEOUS CHANGE.

CROSSPOINT LATCH CORP.

95 PROGRESS STREET • UNION, N J. 07083 USA Country Code 1 • (201) 688-1510 • TELEX 132850

# SHOOT IT.

Take your best shot with Thomson Betacams, studio cameras and field cameras.

# SHAPE IT.

Create your best ideas on Vidifont Character Generators/Paint and Graphics Systems.

# SCANIT.

Digitize, process and store your best slides on the Thomson TTV 2710 slide scanner.

# PICTURE ITALL. WITH THOMSON.


ATHOMSON-CSF BROADCAST, INC.

37 Brownhouse Road Stamford CT 06902-6303

Tel: (203) 965-7000 TWX: (701) 474-3346

Circle (85) on Reply Card

www.americanradiohistory.com

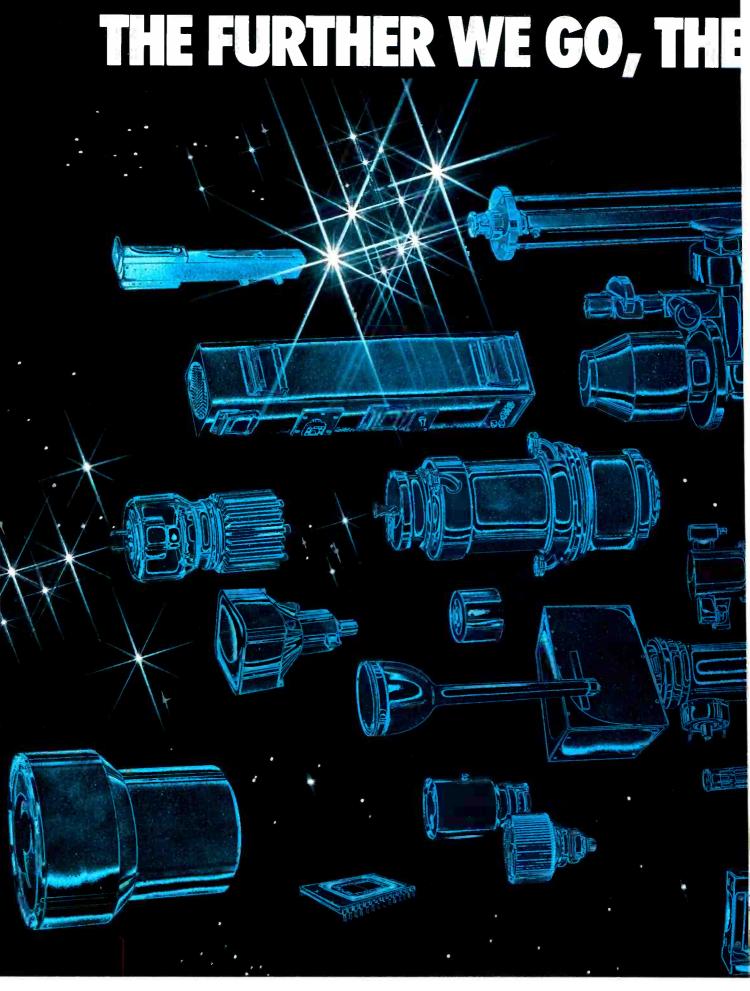

Belgique : BRUXELLES Tel. (32-2) 648 64 85 Tx 23 113 THBXL B Brazil: SAO PAULO Tel (55-11) 542 47 22 Tx (011) 24 226 TCSF BR Canada: MONTREAL-QUEBEC Tel (1-514) 288 41 48 Tx 5 560 248 TESAFI MTL

Deutschland : MÜNCHEN. Tel. (49-89) 78 79-0 Tx 522 916 CSF D España: MADRID Tel (34-1) 405 16 15 Tx 46 033 TCCE E France: BOULOGNE-BILLANCOURT Tel. (33-1) 46 04 81 75 Tx THOMTUB 200 772 F



Our customers worldwide know that working in partnership with Thomson-CSF Electron Tube Division is a surefire way of attaining their goals - no matter how tough they may be.


With a commitment to research that keeps us right at the leading edge of technology, Thomson-CSF experience makes sure our products stay ahead. For innovation, performance and solid reliability.

In radio and television, telecommunications, military and civil aviation, as well as a wide range of scientific and medical applications, Thomson-CSF know-how gets your systems moving. Fast.



THOMSON ELECTRON TUBES AND DEVICES CORPORATION 550 Mount Pleasant Avenue DOVER, NEW JERSEY 07801 Tel.: (201) 328-1400 - TWX: 710987 7901














Circle (86) on Reply Card

# SBE Update

#### The NFCC shapes up

By Bob Van Buhler

he National Frequency Coordination Committee (NFCC), referred to in last month's "SBE Update," is taking shape. Elections were held at the group's first meeting. The following persons were elected to key positions: Jerry Plemmons (Outlet Communications), chairman; Bob Van Buhler (WBAL, Baltimore), vice chairman; Ed Williams (NAB department of science and technology), secretary; and George Thomas (Mutual Broadcasting System), treasurer.

The council adopted an organizing structure and appointed subcommittees including one on databases and one on procedures and policy. Another committee will develop a nationwide calling frequency and a video source identification signal to assist in local coordination. The officers also formed a charter and bylaws committee, which will develop the procedural aspects of the new council.

Timing of the next meeting depends on the progress made by the subcommittees. A meeting may be held this month. Representatives of all major networks, Radio and Television News Directors Association (RTNDA), NAB and the National Cable Television Association attended the first meeting.

#### SBE on-line

SBE has been working at the national level to improve communications with its membership. One part of this improvement includes a cooperative arrangement with CompuServe to include SBE in the Broadcast Professional's Forum (BPFORUM).

Gerry Dalton of the Dallas chapter and SBE's National Frequency Coordination chairman has been named as chairman of the electronic communications committee. A portion of his duties includes acting as SBE system operator (Sysop) for liaison with CompuServe.

SBE has an area within the BPFORUM to upload meeting information, newsletters, private conferences and communications exchanges with members. The system allows members to leave specific messages and questions for individual board members.

The current SBE filings with the FCC will be included in the on-line information. The SBE area also will include a list of Part 74 frequency coordinators.

Most SBE members will be able to sign on through a local access number,

thereby avoiding long distance charges. If you haven't subscribed to Compu-Serve, consider doing so. You can subscribe by checking the appropriate box on the back of your SBE membership renewal card. If you have already renewed your SBE membership, or need additional information, call the national office at 317-842-0836.

#### Membership growth

Many chapters have already realized the importance of the personal touch in membership stability and growth. There will always be those in the chapter who will forget to pay their annual dues and gradually they become ashamed and neglect to show up at the meetings. The chapter chairman can help prevent this from happening.

An essential element in keeping current members in the fold is accurate information. The chapter's chairmen and secretaries have an obligation to know the renewal status of each of its members. They also need to let members know when their memberships have lapsed. Sometimes, it is necessary for the chairman to call the members and let them know that participation is important. The personal touch usually suffices in drawing people back to the meetings.

Chapters may find it effective to appoint a membership and fellowship chairman. This person can be responsible for new members and help them feel at ease at their first meeting. Membership and fellowship chairmen also are the ones who make a telephone call to the members who have not paid their dues. These chairmen also can obtain feedback from the members on meeting plans and national SBE issues. Often a phone call is all that is necessary to keep a member active.

The most successful chapter in obtaining new members last year was chapter 47 in Los Angeles. This chapter enjoyed a growth of 19 new members during the year. Other chapters with 15 or more new members for 1985 include chapter 46 in Baltimore, chapter 16 in Seattle, chapter 15 in New York and chapter 9 in Phoenix.

#### 1987 SBE national convention

With the 1986 national convention in St. Louis already well planned and successfully booked, the SBE national office is soliciting proposals for hosting the 1987 and later conventions.

Other chapters and chapter groups are invited to make their proposals as soon as possible. The prospective host must have the ability to contract a 250-booth area for exhibits and demonstrate the organizational structure to properly execute the convention. The financial resources to secure reservations and accomplish advance printing also are necessary. These costs are estimated at about \$10,000.

#### SBE tape library

The SBE offers individual chapters several tutorial videotapes that make good monthly programs. The tapes include programs on signal-to-noise ratio measurements, linear and non-linear distortion and field time VIRS. These particular tapes were produced by Tektronix. Other tapes include a lighting seminar by Colortran and line measurements and IM distortion from Hewlett-Packard.

There is no fee for the use of these tapes, but the chapter must pay postage both ways. If needed, the tapes can even be duplicated for delayed use by your chapter. If you are interested in using any of these materials, contact the national office. If you have similar training materials, please let us know. Offers and suggestions can be directed to Bob Van Buhler at 301-338-6567.

#### Sustaining membership

Local chapters have been given an opportunity to participate in the SBE sustaining membership project. A mailing has gone out to each of the SBE chapter chairmen with a list of sustaining membership candidates. The chapter chairman is requested to make the personal contact needed to help secure the new SBE sustaining member.

As of April, a total of 84 manufacturers, distributors and consultants were supporting SBE through sustaining membership.

An additional 194 group broadcasters and 1,537 manufacturers and distributors were requested to support SBE last month. Because of the size of our membership, we are an important element to each of these groups of companies. If you are willing to help with this project, contact Joe Manning at KAET-TV, 602-965-3506.

Van Buhler is chief engineer for WBAL-AM and WIYY-

#### News

Continued from page 4

parameter was noted by adding the following to the report: "Progress in HDTV technology and component design has resulted in HDTV production equipment now being available from sources in several countries. Also, a number of HDTV production facilities using certain parameter values given in the annex are in operation in various parts of the world.'

Third, technical experts were urged to complete HDTV studies before the CCIR's final meeting in 1989. To achieve this, the expert study group will schedule a meeting on HDTV in 1988.

Finally, noting the views of several countries using the 625 line/50Hz broadcast systems, the CCIR added: "There is also a need for the HDTV studio standard to accommodate future broadcasting systems compatible with existing scanning standards."

Delegates from 75 nations attended the plenary. Leading the opposition to the 1,125/60 parameter were France, the Netherlands, West Germany and Great Britain. Some European receiver manufacturers were concerned about the potential impact of the proposed standard. They intend to study and possibly develop alternative systems to compete with the 1,125/60 standard developed by NHK, the national Japanese broadcasting service. [:[:])))]



Richard Abbenante has joined Broadcast Systems, Austin, TX, as Western regional sales manager. He previously spent 26 years with RCA Broadcast Systems.

Benton Everett and Brent Bullock have been assigned positions with Quanta, Salt Lake City. Everett is Midwest regional sales manager. He is responsible for promoting character generators, the Quantapaint electronic video paint series and Dimension, a 3-D modeling and animation system. Bullock has been reassigned to the Western region as regional sales manager. He joined Quanta in January of 1984 as sales manager for the Midwest region.

Dot Warshawsky has been named Mid-Atlantic sales manager for Richardson Electronics, Franklin Park, IL. She is responsible for design and implementation of a marketing program targeted at

current and potential accounts from Delaware to Virginia, as well as assisting the other district sales managers on distributor accounts.

Daniel P. Marchetto has been promoted to OEM sales engineer for Shure Brothers, Evanston, IL. He is responsible for OEM customers, as well as developing new accounts and opportunities in the various OEM markets.

Mark Terry has been named director of marketing for New England Digital, White River Junction, VT. He is responsible for the supervision and coordination of advertising and marketing.

Michael A. Pirrone has joined COM-SAT International's marketing and sales division, Washington, DC. He is responsible for sales of international broadcast services. Pirrone will operate out of the company's New York City office. [:[:])))]

#### Photo credit

We mistakenly left off the photo credit for our May Transmission Systems Special Issue cover. The cover photograph, a dramatic view of a Klystrode, was taken by Pete Nuding of Pete Nuding Photography, Mountain View, CA.




Circle (90) on Reply Card



Circle (91) on Reply Card

Want more information on advertised products? Use the Reader Service Card.

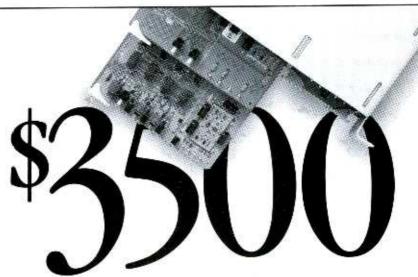

## How can Grass Valley Group sync so low?

Our revolutionary new integrated circuit — The SPG Gate Array — gives the 9520 Master Reference Synchronizing Generator the industry's most astonishing price/performance ratio

The 9520 accommodates precision timebase options, dual test signal and source ID options, and a backup power supply. And that means superior master-generator features, precision, accuracy and performance

The 9520 is only one of our landmark 9500 Series Sync Generators

### Grass Valley Group®


A TEKTRONIX COMPANY

STRENGTH YOU CAN RELY ON

The Grass Valley Group, Inc., P.O. Box 1114, Grass Valley, CA 95945 (916) 273-8421 OFFICES: New York (201) 845-7988;
District of Columbia (301) 622-6313, Atlanta (404) 493-1255, Chicago (219) 264-0931; Minneapolis (612) 483-2594;
Dallas/Fort Worth (817) 483-7447; Los Angeles (818) 999-2303; San Francisco (415) 968-6680

# Wipe out recorded



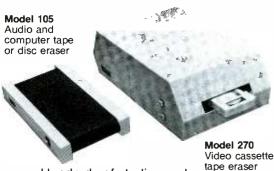

Hundreds of studios and production facilities nationwide save on tape cost without sacrificing recording integrity by using a Garner magnetic tape eraser. Garner outperforms all others in depth of erasure, speed of operation, dependability and durability. The complete line includes erasers for 1" high-coercivity video tape, video cassettes, audio tape and computer media.

> Write or call our toll-free number for a free brochure.

Toll-Free 800-228-0275



4800 N. 48th St., Lincoln, NE 68504, (402) 464-5911 TELEX 438068

Circle (93) on Reply Card

# Business

#### Fuji Photo Film opens new headquarters

Fuji Photo Film USA, New York, has opened its corporate headquarters in Elmsford, NY. The address is Taxter Corporate Park, 555 Taxter Road, Elmsford, NY 10523. The telephone number is 914-789-8100.

#### **BAF** purchases Scientific-Atlanta components

Scientific-Atlanta, Atlanta, has received an order from BAF Communications for broadcast quality video components. The purchase included model 7555 video exciters, model 9630 receivers, model 418A protection switches and dehydrators. BAF will use the equipment to outfit transportable uplinks for satellite news gathering applications. The components will be integrated into mobile uplinks.

#### Grass Valley receives Andrew order

The Grass Valley Group, Grass Valley, CA, has received the largest single order for its Ten-X 10x1 routing switcher from the Andrew Corporation. The routing switcher will be used to switch video and stereo audio via an RS-232 serial interface from satellite downlinks to major TV networks.

#### Bayly makes name change

Bayly Engineering Limited, Ajax, Ontario, has changed its name to AEG Bayly. The address remains the same.

#### Shintron and Chroma Digital reach agreement

Shintron, Cambridge, MA, and Chroma Digital Systems, Santa Clara, CA, have reached an agreement whereby Shintron has acquired Chroma Digital's assets, including inventories, know-how and technology under development. The products will be manufactured at Shintron's Cambridge plant. Shintron will honor the remainder of Chroma Digital's existing warranty policies and obligations.

#### Gentner makes delivery to Conus Communications

Gentner Engineering Company, Salt Lake City, has announced the delivery of a second communications system to Conus Communications, Minneapolis.

#### Studer and Philips form venture

Willi Studer A.G. and N.V. Philips Gloeilampenfabrieken have formed a joint venture for the research and development of compact disc-related professional studio systems. The venture is intended to exploit the synergism attained by cooperation of the two companies in R&D resources, as well as expertise in product engineering. The venture will not affect independent developments by both companies in the magnetic tape recording and optical disc mastering systems.

#### Sony receives orders, delivers equipment

Sony Broadcast has received orders from TVi, London, for five Betacart machines. TVi is the first company in the United Kingdom to use the machines for on-air transmission.

RTP, the Portuguese radio and TV network, has ordered 13 BVW-3AP Betacam cameras, 15 BVW-40P recorders, 12 BVW-10P players, seven BVW-20P portable players, seven CCU-300PL camera remote-control units, a range of monitors and more than 25 sets of wireless microphones.

Sony Professional Products is producing its PCM-3000 series DASH 1/4-inch format digital audio recorders at its Ft. Lauderdale, FL, facility. The first 15 units were delivered to the NHK broadcast network in Japan last September. The shipment was part of an order for more than 25 recorders.

#### A.F. Associates holds rep position

A.F. Associates, Northvale, NJ, has been reappointed the exclusive North American representative for the British-made AVS 6500 standards converter.

#### Transtar chooses Wegener SCPC

The Transtar radio network has chosen the series 1600 SCPC syslem from Wegener Communications, Norcross, GA, to transmit network programming to its format 41 and oldies channel affiliates. The system will be used for stereo audio, cuing signals, addressing and distributing network information to radio stations from the Transtar radio uplink.

#### Kahn and Totsu sign marketing agreement

Kahn Communications, New York, and Totsu Company, Tokyo, have signed a marketing agreement whereby Totsu will exclusively market KCI broadcast products to Japanese government and commercial broadcast stations.

#### Networks approve Dalsat systems

Dalsat, Plano, TX, has announced network approval of its satellite news gathering vehicles for use by network affiliates. ABC and CNN have already approved the satellite news gathering systems.

#### **Enterprise Systems acquires Kaman Broadcasting**

Enterprise Systems Group, Dallas, has signed an agreement to purchase the assets of Kaman Broadcasting Systems, Colorado Springs, CO. Kaman Broadcasting specializes in computer services for the broadcast industry with a customer base of more than 50 TV and radio stations in the United States, Canada and Mexico. The company will continue to be based in Colorado Springs.

#### **AKG** acquires Ursa Major

AKG Acoustics. Stamford, CT, has announced the acquisition of Ursa Major, Boston. AKG acquired all assets and trademarks, establishing a new digital products division. In addition to the R&D activities undertaken by the parent company in Vienna, Austria, the Boston-based facility will become AKG's second R&D center for digital product development.

#### **Delta Electronics installs system**

Delta Electronics, Alexandria, VA, has announced that Radio Mundial, Rio de Janiero, Brazil, has installed a Delta C-Quam AM stereo system. This installation follows the Brazilian government's decision to make the C-Quam system the AM stereo standard. Radio Mundial, the first station to install the system, is part of the Globo Network.

#### Radio Systems becomes distributor

Radio Systems, Edgemont, PA, has been appointed the exclusive distributor of two subcarrier FM radio receivers, imported by Uni-Band, a group of SCA station operators. Model RF-42 is a portable, battery operated radio, and model RF-92 1:(:4))))] is a tabletop receiver with a pre-amp output.

#### **ISOLATION** WITHOUT DEGRADATION The Best Audio Transformer

- Wide bandwidth
- No overshoot or ringing
- Flat group delay
- Low hysteresis distortion

jensen transformers

10735 Burbank Blvd. • North Hollywood, CA 91601 (213) 876-0059 Closed Fridays Visitors by appointment only.

Circle (104) on Reply Card



#### **CART'EM UP ON AUDIOPAK AA-4!**

Sales - Service Broadcast Cartridge Service (714) 898-7224

Circle (95) on Reply Card



Circle (96) on Reply Card



#### How can you get a free 9500 Series **Timing Conversion** Slide Rule?

Just drop us a note on your business card or letterhead, telling us what type of facility you work in, what sync generator is currently in use there, and how long you've had your current

equipment. Return it to:

Grass Valley Group P.O. Box 1114, Department 9500 Grass Valley, CA 95945

and we'll send you your FREE Timing Conversion Slide Rule!

**Grass Valley Group®** 

A TEKTRONIX COMPANY

STRENGTH YOU CAN RELY ON

The Grass Valley Group, Inc., P.O. Box 1114, Grass Valley, CA 95945 (916) 273-8421 OFFICES: New York (201) 845-7988; District of Columbia (301) 622-6313, Atlanta (404) 493-1255; Chicago (219) 264-0931; Minneapolis (612) 483-2594; Dallas/Fort Worth (817) 483-7447; Los Angeles (818) 999-2303; San Francisco (415) 968-6680.



#### **Broadcast systems**

Panasonic Broadcast Systems has introduced the following products:

- The AK-3090/AK-3091 coax or triax cable adapter for the AK-30 handheld camera with separation distances of up to 6.600 feet between the camera and the remote base station.
- The AG-6400 VHS hi-fi portable recorder/player is designed for field recording. The unit has dual VU meters, a dynamic range of greater than 80dB, less than 0.005% wow and flutter and an audio response of 20Hz to 20kHz.
- The AG-155 professional VHS CCD camcorder features color pictures produced by a 1/2-inch CCD pickup element and a piezo auto focusing system, which consists of a microprocessor and a special controlled lens.
- The VP-7722P audio analyzer has a 0.0001% distortion factor, with a 10Hz to 110kHz frequency range and 20 channel inputs. The analyzer measures distortion factor, signal-tonoise ratio, ac level and intermodulation distortion.

Circle (350) on Reply Card

#### Presentation system

A.F. Associates has unveiled the Pegasus 5150 commercial presentation system, which allows playback of prerecorded composite reels and/or individual spot material. It also allows the user to make late changes in running order and supports multiple playback sources.

Circle (351) on Reply Card

#### Power amps, communications link

Raycom Group has introduced the following products:

- •Microwave power amplifiers which couple broadbandedness with high-power output. One model covers both the 2GHz and 2.5GHz auxiliary broadcast bands in a single broadband unit while another covers both the 6.5GHz and 7GHz bands in a single unit. A third model covers the 13GHz band and features output power options of 2.5W or 5W.
- •Sky-Link, a satellite communications link that provides mobile uplink vehicles with four independent audio channels.

Circle (352) on Reply Card

#### Tripod, fluid head, microphone fishpole

Gitzo has announced the following products:

- •The 563LM Reporter Fisher is a 5-section fishpole, with an outside diameter of five inches and two soft handgrips, and has a range from  $2\frac{1}{2}$  feet to  $10\frac{1}{2}$  feet.
- •The 480 fluid head offers an adjustable counterbalance for cameras up to 30 pounds, as well as 100% fluid tilt, the fluid having a silicone base for operating under extreme temperatures.
- •The Mini Tele Studex is a 4-section tripod with a leg diameter of 11/2 inches, extending from zero inches to 63 inches and supporting cameras up to 100 pounds.

Circle (353) on Reply Card

#### TV program delay system

Hubbard Communications has announced the HCD-500 TV program delay system, which will delay any incoming program from three minutes to two hours. The system incorporates the field-tested electronics of the HCC-55 cart system.

Circle (354) on Reply Card

#### Video, audio switchers

HEDCO has introduced the Hedline series of self-powered 4-input, 1-output video and audio switchers which offer remote control and AFV operation. The video unit features looping inputs, vertical interval switching and full broadcast

specifications with 30MHz bandwidth. The audio switcher has two balanced outputs plus a monitoring phone jack on the front panel. Signal-to-noise ratio is greater than 100dB with response at  $\pm 0.1$ dB 20Hz to 20kHz.

Circle (355) on Reply Card

#### Wireless receiver, 2-way radio

Nady Systems has introduced these products:

- The EasyTalk PRC-4H is a handheld 2-way radio using the 49MHz band. The radio has FM operation and a dual conversion superheterodyne receiver and provides communication for a range of up to one-fourth to one-half mile. It is housed in a light case with belt clip and a 9V battery provides power.
- The 501 VR is a portable wireless receiver on the VHF highband for use with the 501 or 701 VHF wireless transmitter. The mini-receiver is for video production or stage monitor use.

Circle (356) on Reply Card

#### Time compressor/expander

Lexicon has introduced the 2400, a stereo audio time compressor/expander incorporating a time-code reader and reference output. The unit is designed for use on both polyphonic music and voice, and employs digital signal processing algorithms to provide mono compatibility and stereo imaging. It is designed to change the running time of video, film or audio program material while maintaining the original audio pitch.

Circle (357) on Reply Card

#### PC compatible ENR system

Comprompter has introduced the ENR-PC, an IBM-PC compatible news production and prompting system. It features the same functions available in its Apple-based systems in a PC version. The system features menu-selected functions, onscreen prompts, split-screen scriptwriter/word processor. automatic word wrap and line endings, catalogue displays, electronic prompting, computerized archiving and a built-in modem/terminal script transfer program.

Circle (358) on Reply Card

#### Component downstream kever/RGB chromakever

Shintron has introduced the DK3/CK3 component downstream keyer/RGB chromakeyer combination. The keyers use a super-linear extra wideband to perform key and program-preset fades; generates independent video keys and performs drop shadows in eight directions.

Circle (359) on Reply Card

#### Clipping protection devices

MCG Electronics has introduced the following products:

- The Surge-Master Avalanche 2100A series prevents damage to extra-sensitive equipment by clamping ac line transients directly at the equipment input. The unit consists of matched diodes to directly shunt transients around the sensitive load in less than 1ns.
- Mini Surge-Master 600 series ac power line protector provides 2,250 joules/phase absorption capability for 120Vac to 480Vac single phase or wye service panels. It features a triple redundant, modular approach.

Circle (360) on Reply Card

#### Satellite data decoder

The Chesapeake Group has introduced the SDD-10 station data decoder. It permits identifying individual stations and

groups of stations with a unique code so that messages can be sent to them. The unit accepts FSK data from many sources.

Circle (361) on Reply Card

#### Multi-element antenna

Spatial Communications has announced the Microtenna-ME, a multi-element antenna for reception of multichannel television at distances greater than 10 miles from the transmitting antenna site. It features a 4-element antenna with integrated block downconverter. The array provides an additional 6dB of antenna gain.

Circle (362) on Reply Card

#### Edit suite audio mixer

Graham-Patten Systems has developed model 608, an 8-input, edit suite audio mixer. It offers edit system control of source selection, preview functions and transitions. It also may be operated manually as a conventional audio mixer or with a combination of manual and edit system control.

Circle (363) on Reply Card

#### Audio correction device

Titus Technological Laboratories has introduced The Last Word, a microprocessor-based stereo audio correction device to correct audio problems. It is a unity gain in-line device that monitors any stereo source and will correct automatically or manually. The unit provides metering of the inputs monitoring the left and right input channels on 20dB VU meters, and monitoring the L+R and the L-R on 40dB VU meters.

Circle (364) on Reply Card

#### Steadi-film system

The Steadi-Film Corporation has introduced the Steadi-film system, which eliminates film weave in film-to-tape transfer. The system is a pin-registered telecine gate that retrofits to a Rank Cintel Mark III and operates under its own microprocessor-control unit.

Circle (365) on Reply Card

#### Digital multimeter

John Fluke Manufacturing has announced the 8060A digital multimeter, a handheld, microcomputer-controlled 4½-digit test instrument. It measures frequency to 200kHz and relative and decibel measurements with almost any impedance. Dc voltage is measured in ranges from 200mV to 1kV full scale at an input impedance of  $10m\Omega$ . Ac voltage is measured in ranges from 200mV to 750V true rms.

Circle (366) on Reply Card

#### Stabilizing lens accessories

Schwem Technology has announced three Gyrozoom 60/300 image stabilizer lens accessories. The wide-angle attachment reduces focal length by 5X. It's rated at f/6.2 with a 3-inch minimum operating distance. The remote-control system provides remote control of focus, stabilization, iris and zoom. The travel bag has separate compartments to hold the wide-angle attachment and lens cables.

Circle (367) on Reply Card

#### Switcher with editor control

Crosspoint Latch has introduced the 6119 production switcher with editor control. It features five inputs, three buses, full colorizer, fade to black, soft, hard or bordered edges, 12 wipes, joystick, two keying levels, test mode and a blanking processor.

Circle (368) on Reply Card

#### Filter, cover, discharger and multicharger

Perrott Engineering Labs has introduced these products:

- · A dichroic filter designed in Pyrex for daylight color correction from a tungsten Halogen source is mounted in a metal holder for use on the Perrott minilight on-camera portable light.
- Cozies are quilted, thermally insulated, battery operated warming covers for cameras and VTRs.
- The PE 138 NP Betacam battery discharger is designed to discharge and exercise Betacam batteries.
- The PE 868 multicharger is capable of overnight charges of up to eight Perrott PE-90s or equivalents, simultaneously and independently.

Circle (369) on Reply Card

#### Wireless microphone system

Telex Communications has announced its wireless microphone system, designed for ENG broadcast and remote video production markets. The system consists of the ENG-4 4-channel receiver and WT-400 2-channel transmitter. The ENG-4 has a small monitor earphone and 1-wave antenna. The WT-400 is a 2-channel selectable transmitter to be used with a Telex WLM-200 miniature lapel microphone.

Circle (370) on Reply Card

#### Audio and video products

Ampex has introduced the following products:

- Ampex 198 and 199 ½-inch VHS and Beta videocassettes for the M format feature high-energy, cobalt-modified gamma ferric oxide and an antistatic agent.
- 467 professional U-matic digital audio cassettes for PCM converters feature a cross-linked copolymer oxide binder and can be used in all digital U-matic systems with standard factory adjustment.
- ATX-100 digital repositioner with zoom consists of control keyboard, computer system and a signal system.
- Ampex ADO component input/output kit adds capabilities to standard composite ADO systems. It consists of three boards and allows user to choose between composite and component input and outputs.

Circle (371) on Reply Card

#### Videotape editor, automation system and optimizer

CMX has introduced the following products:

- The CMX 3100 computer-assisted videotape editor features multiple EDL files, expanded EDL memory, autoclean, matchcut calculate, learn keys, short-cut wipe and dissolve, and an enhanced, easy-to-use switcher memory.
- The CASS 1 computer-aided sound sweetener is an integrated time code-based audio editing and audio console automation system that controls up to six audiotape recorders and 15 additional sources. The system features a fader memory system and the CRT graphics show fader levels.
- The EDL Optimizer provides list cleaning, sorting, text editing and look back through multiple generations of EDL and auto assembly.

Circle (372) on Reply Card

#### Semi-automatic distortion meter

Leader Instruments has introduced the LDM-171 semiautomatic distortion meter. It features automatic nulling that eliminates manual tuning; S/N measurement; ac signal level measurement; high-pass filter; and monitor output terminals.

Circle (373) on Reply Card

## IN SEARCH OF EXCELLENCE.

Long before it was a popular management theory, broadcasters were searching for excellence. Excellence of Sound.

The search is still on, but the goal is now within the reach of every FM broadcaster.


The 695 is an exciter without equal . . . in quality sound . . . in versatility . . . and in value. Any type of distortion you can name (THD, TIM, IMD) is less than .025 percent. This isn't an environmentally controlled lab figure, but rather one that is measurable over the operating temperature range of the equipment. Moreover, noise is so low that it's virtually impossible to measure.

QEI's 695 offers features that the competition has never even dreamed of. A peak counter with LED display, modulation measurements on the front panel, and a measurements grade linear demod built in. It is synthesized, has wideband circuitry, a 3-color LED bar graph for modulation display, a 10-position meter, and many other features that are best described in our new brochure.

For more information on QEI and the 695 Exciter just write or call us. You'll see why our search for excellence has produced the best value on the market today.

## **QEI** Corporation

One Airport Drive □ P.O. Box D Williamstown, NJ 08094 □ (609) 728-2020

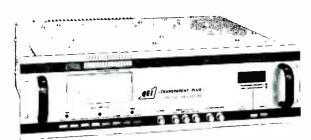

Circle (98) on Reply Card

#### Oscilloscopes and spectrum analyzers

Hewlett-Packard has introduced the following products:

•The HP8570A benchtop analyzer covers RF signals from

• The HP8570A benchtop analyzer covers RF signals from 10MHz to 22GHz. It features built-in peak-search, and resolution bandwidth, video bandwidth and sweep time are adjusted automatically.

•The 8567A RF analyzer has a 10kHz to 1.5GHz range. An FFT function for close-in amplitude modulation and Gaussian noise power density are measured with built-in functions.

•The HP5180T/U and HP5183T/U digitizing oscilloscopes feature automatic test routines and provide digital waveform storage from which they can process waveform data to supply frequency, rms, volts, peak-to-peak, pulse and frequency spectra. They feature a 2,048 x 2,048 vector display.

Circle (374) on Reply Card

#### Studio monitors and amplifier

JBL has introduced the following products:

• A line of studio monitors deliver frequency response beyond 27kHz. The 2-way 4406 features a 170mm polypropylene woofer; the 2-way 4408 has a 200mm fiber cone woofer; the 3-way 4410 has a 125mm midrange transducer and a 250mm laminate construction woofer; the 3-way 4412 has a 300mm woofer and a 75mm diameter ribbon wire copper voice coil.

• The 6215 power amplifier features 35W into  $8\Omega$ , 45W into  $4\Omega$  and 90W into  $8\Omega$ , mono-bridge mode. It uses a low transient intermodulation design, is housed in a heavy-gauge steel chassis, and features complementary devices in all predriver, driver and output stages.

Circle (375) on Reply Card

## Frame synchronizer, changeover system and test generator

Leitch Video has introduced the following products:

• The DFS-3000N is a compact NTSC digital frame synchronizer with noise immunity, RS-170A zero SCH output, RS-232C remote control ports, field or frame freeze, three switching modes, VIR corrector, auxiliary video input and four output system phase presets.

The CDA-5500 automatic changeover system for the CSD-5300N master lock system driver monitors time code, impulse drive RS-232C outputs, and audible and visual alarm indicators.

• The TTG-2500N stand-alone digital test set generator contains an NTSC sync generator, produces 22 test signals, has sync, blanking, subcarrier and trigger outputs and an internal temperature-compensated crystal oscillator.

Circle (376) on Reply Card

#### Video triax connector

Lemo has introduced the  $75\Omega$  video triax connectors, which accommodate cable diameters from 8mm to 15mm. The connectors are self-latching with quick connect/disconnect gold-plated contact connectors.

Circle (377) on Reply Card

#### Color pattern generators

Video Aids of Colorado has announced the PG-2PC color pattern generator. It features full-field and split-field color bars, full-field blue gun, cross-hatch and blackburst.

Circle (378) on Reply Card

#### SCPC receiver and IF processor

AVCOM has introduced two products:

• The SCPC-2000 receiver with phase-locked microwave oscillator and multiplier system receives signals from satellites operating in the 3.7GHz to 4.2GHz band.

The SCPC-500 IF processor block converts signals on

transponders 1-24 to an intermediate frequency of 50MHz to 550MHz. A microwave oscillator allows unattended reception over long periods of time without significant drift.

Circle (379) on Reply Card

#### Computer graphics system and paint package

Cubicomp has introduced enhancements for its PictureMaker system:

- · Video image capture, video control and digital matting allow the system to act as a turnkey unit with live-action video and 3-D computer graphics.
- The PictureMaker/20 is designed for off-line video production and graphics. Enhancements include user interface features, cross-sectional modeling, curve smoothing and 20 new fonts.
- True Color Paint, a 16-bit true-color paint package, enables users to display 65,000 colors in a single image and uses a pop-up palette. Colors can be blended and images can be tinted and shaded.

Circle (380) on Reply Card

#### Noise reduction unit

Dolby Laboratories has introduced the model 390 C-type noise reduction unit, which provides noise reduction for the two tracks of 34-inch videotape recorders. Features include electronically balanced concentric input/output level controls, S/N reduction of 20dB, and spectral skewing and antisaturation techniques. Noise reduction identification has been added to the model 350 noise reduction unit. It responds to subaudio frequency carrier and an NRI tone is generated along with the program.

Circle (381) on Reply Card

#### Camera cover and battery pack

CVR Products has introduced two broadcast products:

- The Rain CVR video camera cover is made of lightweight, waterproof nylon. It is adjustable and provides access to camera controls.
- The BP90-type battery pack for the Sony BVW-3 Betacam works with 3.5Ah to 4Ah BP90-type batteries instead of the 1.5Ah NP1 batteries. It mounts in place of the tripod mount and mates to the tripod plate-locking system.

Circle (382) on Reply Card

#### **Broadcast color monitor**

Barco Industries has introduced the CVS, a professional broadcast color monitor that uses a microprocessor-based design and plug-in modularity. The monitor has a digital and an analog bus and four open slots for plug-in modules. Functions are controlled by touch-activated membrane switches on the front of the monitor. Any and/or all functions can be made available at a remote keyboard

Circle (383) on Reply Card

#### **Communication towers**

Aluma Tower Company has introduced trailer-mounted communication towers. They are available with up to 100 feet height and can be provided with a manual crank mechanism or 12V winch operation. They come complete with 2-inch ball hitch, spring suspension and taillights.

Circle (384) on Reply Card

#### Automatic synthesizer

Orban has introduced the 275A automatic stereo synthesizer. The synthesizer is a stereo in/stereo out device, incorporating two methods of automatic recognition. Singlechannel recognition looks for the absence of audio on one channel and will crossfade to synthesize stereo from the re-

## **OUR FM** MONITOR DESERVES A SECOND GLANCE.

BUT IT DOESN'T NEED IT.

Engineers look twice when they first see our 691 Stereo and SCA Monitor. But when they start to use it, they find the 691's meters are easily tracked in a single glance. Like everything else about the 691, its measurement displays are very well thought out.

A color-coded system ties together the associated displays, switches, and jacks for a particular function or test. Select your test by pushing a color-coded button and simply read the results on all of the indicators. It's as easy as it sounds.

Other benefits of the 691 include over 40 proof-of-performance and signal quality measurements. Add a scope and use the 691 as a spectrum analyzer . . . or get a vector display of L/R phasing. Perform a Bessel-Null calibration in minutes. Measure clipped composite accurately and quickly.

The 691 can now be optionally ordered to measure two SCAs. There are marry other features . . . write or call for complete information.

### **QEI** Corporation

One Airport Drive P.O. Box D Williamstown, NJ 08094 [ (609) 728-2020



maining channel. Mono-stereo recognition analyzes certain correlation characteristics of a 2-channel input to decide when to synthesize and automatically crossfades between synthesis or bypass.

Circle (385) on Reply Card

#### Telephone line enhancement

Gentner Engineering Company has introduced the Teleprocessor, which uses Aphex enhancing along with upper and lower band equalization adjustments to maximize telephone line quality. The unit works in conjunction with a telephone hybrid or frequency extension equipment. It also maintains average send audio down the telephone line.

Circle (386) on Reply Card

#### Zero loss video delay fills

Matthey has introduced its PC card that can be equipped with any amount of delay in the 10ns through 1,830ns range. A thick film video amplifier compensates for flat loss and provides 1Vp/p output signal. Five nanoseconds trim is frontpanel adjustable.

Circle (387) on Reply Card

#### Stereo field-production mixer

Shure Brothers has announced the FP42 stereo mixer. designed for professional stereo remote broadcast and field production applications. The mixer provides users with two outputs and four inputs, all switchable for mic- or line-level operation. Each input channel includes a level control, center detented stereo pan-pot, and a pull-pot cuing feature.

Circle (388) on Reply Card

#### Wireless mic system

Cetec Vega has introduced the following products: •The Pro 1-B professional wireless microphone that includes

the T-37 bodypack transmitter and R-31A receiver. •The Pro 1-H professional wireless microphone that features the T-36 handheld transmitter and the R-31A receiver.

Circle (389) on Reply Card

#### Ku-band satellite antenna

Nurad has developed a Ku-band satellite antenna for SNG operations. It is six feet wide and features an offset feed for low sidelobes and high directivity. The fiberglass reflector is honeycomb-reinforced to be lightweight and is painted with a silver coating for reflectivity.

Circle (390) on Reply Card

#### Phone remote audio mixer

Telfax Communications has introduced the TFX-131B phone remote unit, a miniature 4-channel audio mixer. It features built-in 2-way telephone circuitry and up to four mics, two high-level feeds and four headphones can be connected. Features include push-button dialing, built-in rechargeable Ni-cad battery pack, 1kHz test-tone oscillator and 6-pin accessory interface jack for external processors.

Circle (391) on Reply Card

#### Camcorder aluminum cases

RMS Electronics has introduced the VCM-1838 and VCM-1627 Camcorder aluminum cases. They will protect Camcorders, VHS and Beta video cameras and accessories. Each case comes with a padded handle and shoulder strap.

Circle (392) on Reply Card

#### Video interface and audio recorder

Mitsubishi has introduced the following products:

 An interface that allows communications to the intelligent digital faders from video editing systems. It contains protocol information that allows real time automation control of fader level and mute commands.

• The X-86 2-channel digital audio recorder comes in three versions. Features include 14-inch reels, razor blade and electronic editing, punch-in/out, 9.6kHz sync input, auto locator, RS-232C/422 communications port, and EBU interface.

Circle (393) on Reply Card

#### Video cart machine

BSI has announced its second generation DC-80 automatic video cart machine with software-based control, up to 24 transports, stereo audio, automatic cue recording, Q-Mod anti-head clogging system, 2-second preroll, CRT display, auto cue, hard-copy logging and auto eject. It provides CRT displays at the machine and at remote-control points.

Circle (394) on Reply Card

#### Heads and tripods

Innovative Television Equipment has introduced four fluidtype pan-and-tilt heads with companion tripods and accessories. The Cartoni-manufactured camera support equipment features lightweight and compact counter-balanced fluid-type heads with multistop drag controls.

Circle (395) on Reply Card

#### Portable distribution center

Union Connector has introduced the portable distribution center. The 100A single phase input supplies six 20A and one 60A breaker-protected circuits with indicator lights.

Circle (396) on Reply Card

#### Compact editing console

The Winsted Corporation has introduced a compact editing console for 1/2-inch and 3/4-inch frontloading VCRs. The console is 28 inches deep and shelves adjust vertically.

Circle (397) on Reply Card

#### **Delay systems**

ART has introduced its PD3 professional delay system, a 16-bit linear device. It features 64kHz sampling rate; 20kHz bandwidth; 1 input, 3 outputs; barrier strip terminal and 14-inch phone jacks; and separate recessed front-panel controls. Output delays are adjustable in 1ms to 225ms steps.

Circle (398) on Reply Card

#### B/W CCD camera

VSP Labs has announced the SC series solid-state cameras. The series uses a frame transfer CCD with 610x485 array size, has 500 TV line resolution and H and V drive sync.

Circle (399) on Reply Card

#### Remote automated machine network

Avtec Industries has introduced Ramnet, a remote automated machine network for video communications companies and multi-user training facilities which controls routing switchers and VCR functions through IBM PC computers and compatibles. The system automatically schedules and programs up to 255 VCR/VTR and routing switcher events for a full year from remote locations.

Circle (400) on Reply Card

#### **Betacam videocassettes**

Fuji Magnetic Products Division has announced the H321B Beta format ½-inch videocassette. Improvements include an increase of +1.0dB in the audio output and audio S/N, high video S/N, and an ABS-resin shell. Features include duroback coating and an anti-static leader. [=\[=\])))]

Circle (401) on Reply Card

# Professional services

VIR JAMES P.C. CONSULTING ENGINEERS

Applications and Field Engineering Computerized Frequency Surveys

3137 W. Kentucky Ave. – 80219 (303) 937-1900

**DENVER, COLORADO** Member AFCCE & NAB

#### STEIGER, HURRAY & ASSOCIATES INC. CONSULTING ENGINEER SERVICES

6816 Westview Drive Cleveland, OH 44141 (216) 526-7187

#### **EVANS ASSOCIATES**

CONSULTING TELECOMMUNICATIONS ENGINEERS AM-FM-TV-CATV-ITFS-LPTV SATELLITE 216 N. Green Bay Road Thiensville, Wisconsin 53092 Phone: (414) 242-6000 Member AFCCE

# FCC ON-LINE DATABASE

P.O. Box 30730

Bethesda, MD 20814 1-800-368-5754 (301) 652-8822

#### D. L. MARKLEY

& Associates, Inc. CONSULTING ENGINEERS

206 North Bergan Peoria, Illinois 61604 (309) 673-7511 Member AFCCE

#### Radiotechniques

RADIO CONSULTING ENGINEERS

STATION DESIGN AND SERVICE ELECTRONIC PRODUCT DESIGN

Edward A. Schober, P.E. 402 Tenth Avenue, Haddon Heights, NJ 08035 (609) 546-1841

#### **TEKNIMAX**

**TELECOMMUNICATIONS** 

DENNIS R. CIAPURA PRESIDENT

#### **SMITH and POWSTENKO**

Broadcasting and Telecommunications Consultants

2033 M Street N.W., Suite 600 Washington, D. C. 20036 (202) 293-7742

#### **BLAIR BENSON**

**Engineering Consultant** TV Systems Design and Operation

> 23 Park Lane Norwalk, CT 06854 203-838-9049

> > Robert J. Nissen

#### LAWRENCE L. MORTON ASSOCIATES 21671 SUPERIOR LANE

#### LAWRENCE L. MORTON, E.E.

AM • FM • TV APPLICATIONS • FIELD ENGINEERING ANTENNA BROADBANDING FOR AM STERED

(714) 859-6015

#### T & G OPTICS, INC.

71-01 INGRAM STREET FOREST HILLS, NY 11375 COMPLETE REPAIR SERVICE FOR COLOR TELEVISION CAMERA BEAMSPLITTER OPTICS, LENSES, COATINGS, MULTIPLEXER MIRRORS, FILTERS AND PROJECTORS: WRITE OR CALL GERALD PINCUS (718) 544-8156 twenty four hour service with pleasure

#### THE NISSEN GROUP, INC.

Communications Technology Consultants

32 Ridge Drive • Port Washington, New York 11050 (516) 944-5477

#### John Aalto, P.E.

Consulting Engineer

TELEVISION PRODUCTION AND POST PRODUCTION SYSTEMS DESIGN AND PROJECT MANAGEMENT

(818) 784-2208

4534 Van Noord Avenue Studio City, CA 91604

#### SELLMEYER & KRAMER, INC. CONSULTING ENGINEERS

J.S. Seilmeyer, P.E., S.M. Kramer, P.E. AM FM TV MDS ITFS LPTV CATV
APPLICATIONS • FIELD ENGINEERING P.O. Box 841 Mckinney, TX 75069 (214) 542-2056

#### ERIC NEIL ANGEVINE, P.E.

consultant in acoustics

specializing in broadcast studio acoustics

910 Lakeridge Drive 405-624-6043

Stillwater, OK 74075 405-372-3949

#### ATT: CHIEF ENGINEERS

broadcast video maintenan

#### LUNAR VIDEO LTD

FAST TURNAROUND ON ENG, EFP. EDIT SYSTEMS, MONITORS, TEST EQUIP SONY, JVC, PANASONIC, TEKTRONIX – UPS & AIR FREIGHT. PU/DEL DAILY.

138 E. 26th St, NYC

(212) 686-4802

#### Consultation Services

Lightning - Power Conditioning - Grounding Over 40 years experience, work guaranteed

Roy Carpenter

Lightning Eliminators and Consultants 13007 Lakeland Rd Santa Fe Springs CA 90670 (213) 946-6886 TWX 910-586 1381

#### Why not run your business card here? Only \$65 per insertion.

Frequency discounts available. Call 913/888-4664

Why not run your business card here? Only \$65 per insertion. Frequency discounts available.

Call 913/888-4664

Why not run your business card here? Only \$65 per insertion. Frequency discounts available. Call 913/888-4664

Why not run your business card here? Only \$65 per insertion. Frequency discounts available. Call 913/888-4664

Why not run your business card here? Only \$65 per insertion. Frequency discounts available. Call 913/888-4664

Why not run your business card here? Only \$65 per insertion. Frequency discounts available. Call 913/888-4664

Why not run your business card here? Only \$65 per insertion. Frequency discounts available. Call 913/888-4664

# Ad index

Page Number	Reader Service Number	Advertiser Hotline	Page Number	Reader Service Number	Advertiser Hotline
Abekas Video Systems 45	29	415/571-1711	Lerro Electrical Corp		215/223-8200
ADC Telecommunications,			3M Tape Div 100-101		.800/792-1072
Inc		612/893-3010	3M Broadcast & Related		
ADM Technology, Inc IFC Alden Electronics		313/524-2100	Products	46	800/328-1684
Allied Broadcast Equipment 39		617/366-8851 314/962-8596	Midwest Communications Corp1	2	800/543-1584
Alpha Audio		804/358-3852	National Video Service		415/846-1500
Amber Electro Design Inc 52		514/735-4105	NEC America Inc		800/323-6656
Amek Consoles Inc		815/508-9788	Opamp Labs Inc 121	91	213/934-3566
Ampey Corp. (AVSD)		415/367-2911	Orban Associates Inc		800/227-4498
Ampex Corp. (MTD)50-51 Arrakis Systems, Inc27		415/367-3809 303/224-2248	Orban Associates Inc 60		800/227-4498
Asaca/Shibasoku Corp.	13	303/224-2240	Otari Corp	10	415/592-8311
America77	57	800/423-6347	Engineering21		619/438-3911
Audio Precision	17	800/231-7350	Paco Electronics USA,		
Audio Services Corp121		800/231-7350	Inc	26	213/747-6540
Barco Industries, Inc		408/370-3721	Panasonic 104-105		201/348-7336
Beyer Dynamic Inc		516/935-8000 801/972-8000	Panasonic		201/348-7336
Broadcast Cartridge Service	15	50 1/9/ 2-0000	Polyline Corp		312/297-0955 301/589-2662
Inc	95	714/898-7224	QEI126		609/728-2020
Broadcast Video Systems			QEI127		609/728-2020
Ltd		416/697-1020	Richardson Electronics		
Centro Corp		619/560-1578	Inc	82	800/323-1770
Centro Corp		619/560-1578 800/535-7648	Rohde & Schwarz Sales Co. (USA) Inc	71	E16/220 1100
Colorado Video Inc		303/444-3972	RTS Systems, Inc		516/328-1100 818/843-7022
Comprehensive Video 44		201/767-7990	Schwem Technology		415/935-1226
Comrex Corp	89 (	617/443-8811	Sencore96		800/843-3338
Continental Electronics Mfg.	00	24.400.4 = 4.5.4	Sharp Electronics Corp 87		201/265-5548
Co		214/381-7161 201/688-1510	Shure Brothers Inc		312/866-2553
Dynair Electronics Inc		619/263-7711	Shure Brothers Inc		312/866-2553 916/273-9331
ESE83		213/322-2136	Sigma Electronics Inc 107		717/569-2681
Fostex Corp. of America 73	53	213/921-1112	Solid State Logic110-111		212/315-1111
Garner Industries124		300/228-0275	Sony Corp. of America		
Gentner Engineering Co., Inc 76		301/268-1117	(A/V & Pro Aud)	16	
Grass Valley Group, Inc		916/273-8421 916/273-8421	Sony Corp. of America (Broadcast)		
Grass Valley Group, Inc		916/273-8421	Sony Mag. Tape Div	43	
Grass Valley Group, Inc 68		916/273-8421	Standard Communications 97		800/243-1357
Gray Communications			Standard Tape Laboratory,		
Consultants, Inc	54 9	912/883-2121	Inc		415/786-3546
Gray Engineering Laboratories70	50 7	14/997-4141	Studer Revox America Inc 64 Surcom Associates Inc 106		615/254-5651
Harris Broadcast Microwave 65	45	14/33/-4141	Tascam Division TEAC Corp.	100	619/722-6162
Hitachi Denshi America Ltd 3	4 8	300/645-7510	of America 69	48	213/726-0303
Howe Audio		300/525-7520	Tektronix Inc		800/452-1877
IGM Communications		206/733-4567	Thomson-CSF Broadcast 117		203/965-7000
Intergroup Video Systems Inc57 International Tapetronics	38 8	300/874-7590	Thomson-CSF/DTE118-119	86	0001450 0700
Corp./3M	110 8	300/447-0414	Utah Scientific Inc		800/453-8782 818/954-0150
International Tapetronics			Valley People, Inc		615/383-4737
Corp/3M103	100 8	300/447-0414	Varian		415/592-1221
Jensen Transformers, Inc 123		13/876-0059	Videotek, Inc		602/997-7523
JVC Company of America 19		800/582-5825	Ward-Beck Systems Ltd BC		416/438-6550
Kulka-Smith Div. N.A. Philips 90 Laird Telemedia		201/223-9400 301/972-5900	Wheatstone Broadcast	2	202/202 222
Lea Dynatech Inc		213/944-0916	Group		203/393-0887 800/328-2962
Leader Instruments Corp5		00/645-5104	Yamaha International	00	0001020-2302
Leitch Video of America, Inc 61	428	04/424-7290	Corp	30	

Advertising rates in Classified Section are \$1.50 per word, each insertion, and must be accompanied by

payment to insure publication.

Each initial or abbreviation counts a full word. Minimum classified charge, \$35.00.

For ads on which replies are sent to us for forwarding (blind ads), there is an additional charge of \$35.00 per insertion, to cover department number, processing of replies, and mailing costs.

Classified columns are not open to advertising of

any products regularly produced by manufacturers unless used and no longer owned by the manufacturer or distributor.

#### **TRAINING**

**ELECTRONICS DEGREE** by correspondence. Earn Associate, then Bachelor's. NHSC accredited. Free catalog. Write Grantham College of Engineering, Dept. EE-5, 10570 Humbolt St., Los Alamitos, 90720.

**FCC GENERAL RADIOTELEPHONE** operators license through cassette recorded lessons at home plus one seminar in Boston, Washington, Philadelphia. Our twentieth year teaching FCC license courses. Bob Johnson Radio License Preparation, 1201 Ninth, Manhattan Beach, Calif. 90266, Telephone (213) 379-4461. 8-81-tfn

#### **WANTED TO BUY**

HIGHEST PRICES for 112 Phase Monitors, vacuum capacitors and clean, one kw or greater powered AM and FM Transmitters. All duty and transportation paid. Surplus Equipment Sales, 2 Throncliffe Park Dr., Unit 28, Toronto, Canada M4H 1H2, 416-421-5631.

**WANTED:** B & K substitution box, model number #2902. Please state condition & price. John P. Caputo, G.P.O., Post Office Box 3175, Brooklyn, N.Y. 11202.

WANTED: WW-II German and Japanese radio equip ment. Unused US Navy and Signal Corps radio equipment before 1943. Pre-1923 radio equipment and tubes. August J. Link, Surcom Associates Inc., 305 Wisconsin Ave., Oceanside, CA 92054, (619) 722-6162. 7-86-tf

#### FOR SALE

RCA COLOR TELECINE SYSTEM, New/unused. To include: TK-66, color camera, TP-66, 16mm telecine projector, TP-7, 35mm slide projector, TP-55B, camera multiplexer. Write to: P.O. Box 23555-273, San Diego, 1-86-tfn

RCA BTF-1E 1KW FM transmitter and Phelps-Dodge HP 1000-3 3 bay antenna with cables. Excellent for a new Class A station. (312) 545-2121 after 6 PM CDT

REMOTE TRUCK: 1975 Dodge Explorer Motorcoach, air-conditioned, 1" recorders HR200, HR100, Sony 3/4"; (3) cameras (2-FP40, 1-SK80), Switchers, Special effects, generators, scopes, power generator, all audio and video equipment needed to operate remote. Any reasonable offer. Call (305) 656-7771. SAUL GRIMES

RCA TR 600A 2" VTRS WITH HEADS, like new - Mint! 3 machines - under 140 hours. Perfect condition. 8K each or all 3 for \$22,500. Must sell, call now, make offer. Trades considered. Pictures available. 303/399-6444 days, 303/366-8222 eves.

DEALER DEMO SK-97 FOR SALE. Hitachi Broadcast Computer Set Up Camera, LOC Plumb Tube, Canon J13X9 Lens, FULL FACTORY WARRANTY, \$33,000.00. RU-97 and BU-97 also available. Call Bill Trussell (800)

COPPER! For all your broadcast needs. #10 ground radials; 2, 4, 6, 8" strap, flyscreen, counter poise mesh 317-962-8596. Ask for copper sales. 7-86-6t

FOR SALE: R.C.A., BRAND NEW from factory. 16 mm Telecine Projectors, TP-66 with R/C and lens. Call Mr. Frank N. Bovino, S.B. Video, 201-343-6944. 7-86-11

FOR SALE - switcher - JVC - KM 2000 - SEG - Excellent cond. (212) 807-8504

AUDIO EQUIPMENT. Gates cart machine with record amp-mono \$200.00; RCA cart machine-mono \$100.00; 2 Russco turntables with Gray arms \$120.00/pc; 2 Russco Mark V turntables with Gray arms \$350.00/pc; Yamaha 16 X 2 audio board \$1500.00; ElectroVoice 635A \$50.00; mic cables with XLR \$20.00/pc; 2 BE series 3000 Stereo cart machines—play only \$500.00/pc. ASK FOR LYMAN 317-875-9026



#### **SERVICES**

ONE STOP FOR ALL YOUR PROFESSIONAL AUDIO REQUIREMENTS. Bottom line oriented. F.T.C. Brewer Company, P.O. Box 8057, Pensacola, Florida 32506.

TRANSMITTER TUBES REPROCESSED - Save 40 to 50%, 3CX2500, 4CX5000, 4CX15000 and many others. Write for details, FREELAND PRODUCTS CO., Rt. 7, Box 628, Covington, LA 70433. (504) 893-1243 or (800)

#### **EMPLOYMENT OPPORTUNITIES**

**WE PLACE** 

#### TV and Video Engineers

**COAST TO COAST** 

[All Levels, But Not Operators] ALL FEES PAID BY EMPLOYERS

Phone/Resume

#### KEY SYSTEMS

479 Northampton Street Kingston, PA 18704

Phone Alan Kornish at (717) 283-1041

#### **HELP WANTED**

HELP WANTED: TV BROADCAST ENGINEERS. Experience with all TV Broadcast equipment, Minimum 5 years experience. FCC general class license required. Also, needed Audio remix and Maintenance engineers. Four years minimum experience. Send resume to: Jimmy Swaggart Ministries, Darell Wyatt, Chief Engineer, P.O. Box 2550, Baton Rouge, Louisiana 70821-2550. Phone (504) 768-3472.

PRODUCTION/MAINTENANCE engineer in Kotzebue, Alaska needed. Low pressure, excellent benefits. Minimum two years in maintenance engineering, A.S. degree or military training, strong digital microprocessor background. Send resumé to NW Artic Television, Box 51, Kotzebue, AK 99752. 6-86-2t

CHIEF ENGINEER needed for KCRG-TV & AM, Cedar Rapids, Iowa. Must be aggressive, innovative manager with excellent supervisory skills and superior technical expertise. We are a heavily equipped VHF ABC affiliate. Applicants should send a history of their successful management record to the VP/Gen. Mgr. KCRG-TV, Second Avenue @ Fifth St., S.E., Cedar Rapids, IA 52401. EOE. 7-86-1t

MAINTENANCE SUPERVISOR: If you are a takecharge person with 5 or more years of experience in the maintenance of audio and radio frequency broad cast equipment, can organize a maintenance pro gram, manage people and are ready to advance to the Maintenance Supervisor of a major market radio station please send us your resume. Minimum qualifications include good interpersonal skills, a knowledge of digital and analog circuitry diagnosis, trouble-shooting, alignment and repair of equipment including studio audio, STL, RPU and control circuitry, a valid FCC general telephone and auto drivers license are required. Qualified individuals are invited to send their resume to: Personnel Department, WOR Radio -110AM, 1440 Broadway, New York, NY 10018. An Equal Opportunity Employer.

CHIEF ENGINEER FOR SMALL MARKET television station in Butte, Montana. Hunting and fishing aradise. Send resume to General Manager, KXLF-TV P.O. Box 3500, Butte, Montana 59702.

KUHT-TV MASTER CONTROL SWITCHER: KUHT-TV, Channel 8, a major market public television station and licensee of the UNIVERSITY OF HOUSTON, needs master control switcher/tape/transmitter operators. Applicants should have appropriate FCC license and at least two years experience in a similar position. KUHT is equipped with state-of-the-art equipment and broadcasts a full daily schedule at maxi mum power with many programs in MTS stereo. A degree or associate degree in electronics a plus. Please send resume to: KUHT-T, 4513 Cullen Boulevard, Houston, Tx. 77004. Attention: Mr. Al. Leverick, Chief Engineer. E.O.E.

#### **Product Design Engineer**

Orban is hiring electronic engineers to design new products for both our pro audio and broadcast markets.

Ideal candidates should have:

- -BSEE or equivalent with specific expertise in audio signal processing, filter design, modern analog circuit techniques, and high-quality audio circuit design.
- -Imaginative mind that can help define new products for professional audio and broadcast applications.
- -Critical listening skills.
- —Familiarity with microprocessor and other digital design techniques.
- -Experience in a manufacturing environment, coupled with an understanding of production and cost restraints on product design.

Please send a copy of your resume to:



J. Hodge, Personnel Manager Orban Associates Inc. 645 Bryant Street San Francisco, CA 94107 (415) 957-1063

#### TELEVISION / SATELLITE **ENGINEER**

Voluntary Hospitals of America, Inc. (VHA), a progressive national health care service organization, is rapidly expanding. We are seeking a Television/Satellite Engineer to assist the Manager of Technical Operations in the operation of the VHA Satellite Network, which will include the planning, operation and maintenance of all reception and broadcast equipment for the Corporate organization and member organizations

Qualified candidates will possess the

- Minimum of 2 years of college educa-
- tion or equivalent technical education First Class or General FCC license preferred
- Minimum of 5 years experience in the broadcast, industrial or corporate television engineering field required
- Satellite systems experience preferred Excellent communication and interper sonal skills required.
- Ability to work in an environment with multiple projects and meet deadlines

We offer a competitive salary and a comprehensive benefits package in a challenging, high growth environment. For immediate consideration, please forward our resume and salary history in con-

Attn: E. Sullivan **Human Resources Department** Voluntary Hospitals of America, Inc. P.O. Box 160909 • Irving, Texas 75016

erica, Inc

#### **HELP WANTED**

WPAT JOB OPPORTUNITY—WPAT HAS AN OPENING FOR THE FOLLOWING POSITION: Technical Supervisor. New York station has opening for highly qualified technical supervisor. Maintenance experience required for all phases of broadcasting. Contact Kenneth Stout, WPAT AM/FM, 1396 Broad Street, Clifton, New Jersey, 07013. 201-345-9300. AN EQUAL OPPORTUNITY EMPLOYER. 7-86-11

KOVR-TV, SACRAMENTO, is looking for a dynamic self-starter to act as our primary ENG Maintenance Engineer. Must be famillar with ENG cameras and Sony 3/4" VTRS and be able to work well with a competitive news department in the 20th market. SBE certification a plus. Contact Bob Hess, 916-927-1313 or direct correspondence to C/E, KOVR-TV, 1216 Arden Way, Sacramento, CA 95815. EEO M/F.

MAINTENANCE TECHNICIAN - KRIV-TV, Houston, is seeking qualified studio and transmitter technicians. Must have minimum of three years experience and a FCC license. Send resume to: KRIV-TV, P.O. Box 22810, Houston, Tx. 77227. Attn: Wendell Wyborny, VP/CE, E.O.E.

TV MAINTENANCE ENGINEER: The Christian Broadcasting Network, Inc. has an immediate opening for a TV Maintenance Engineer for their Middle East TV Station. The qualified candidate should have 3-5 years solid TV engineering experience using studio and field transmitter equipment, FCC commercial radio/telephone license or Certified Electronic Technician Certificate required. Must have demonstrated problem-solving skills in electronic field engineering. If you feel this opportunity is part of God's plan for you, forward your letter of introduction, resume and salary history, in confidence, to: The Christian Broadcasting Network, Inc., Employment Department - Box ME, CBN Center Virginia Beach, VA 23463.

MAINTENANCE ENGINEEER: Leading television production/post production facility in San Francisco seeks experienced maintenance engineer with strong Broadcast maintenance background. Experience on GVG 300, Quantel paintbox, Quantel Encore, Ampex ADO, Sony BVE 5000 preferred. Good starting salary, medical, dental. Resumes only to Ed Granlund, C.E., Varitel Video, 350 Townsend St., #250, San Francisco, CA 94107.

REMOTE ENGINEER – Opening for highly motivated individual with desire to travel. Six years experience in television engineering capable of making component level repairs. Client relations very important. Systems designs helpful. State of the art equipment used on entertainment and sporting events, coast to coast. Grass Valley, Ampex, Sony, Ikegami, Chyron, Abekas and Quantel. Competitive salary and benefits. Relocation required. Serious applicants only. Dept. 668, Broadcast Engineering, P.O. Box 12901, Overland Park, KS 66212. 7-86-1t

# Buy a Station and Go

Special sealed bid sale (By the City of New York)

Now you can buy FM Radio and UHF TV transmitters (formerly operated as WNYC).

Interested parties should contact: Gordon Shaw—212-669-8548 City of New York Department of General Services Division of Municipal Supplies One Centre Street New York, New York 10007

Sealed bid opening August 27, 1986 City of New York **Department of General Services** 

#### TRADE MAGAZINE VIDEO TECHNICAL EDITOR

Broadcast Engineering, the number one technical publication in the broadcast field, has an excellent expansion opportunity for a TV/video expert. This person will write articles on technical aspects of television. edit materials from outside contributors and offer technical assistance and expertise to other publications within the Intertec electronics group. Candidates must have extensive experience and knowledge of video engineering. A technical degree is preferred. We offer a competitive salary and continuing growth potential. Send a complete resume with cover letter and salary requirements to: Employment Manager, INTERTEC PUBLISHING CORP., P.O. Box 12901, Overland Park, Kansas 66212.

# BROad

## Advertising sales offices

CHICAGO, ILLINOIS Tom Nilsen Phone: (312) 887-0677

(312) 887-0684 15 Spinning Wheel Rd.

Ste 430 Hinsdale, IL 60521

NEW YORK, NEW YORK

Joe Concert

Phone: (212) 682-6630

(212) 682-6631 Josh Gordon

Phone: (212) 687-5076 (212) 687-5077

630 Third Ave., Eighth Floor New York, NY 10017

SANTA MONICA, CALIFORNIA

Herbert A. Schiff Phone (213) 393-9285 Jason Perlman Phone (213) 458-9987 Schiff & Associates 1317 Fifth St., Ste 202

Santa Monica, CA 90401

www.americanradiohistory.com

NORWOOD, AUSTRALIA Hastwell, Williamson, Rouse Pty. Ltd. P.O. Box 419 Norwood 5067, Australia

Phone: 332-3322 Telex: AA.87113

LONDON, ENGLAND

Nicholas McGeachin Suite 460, Southbank House, Black Prince Rd London SE1 7SJ Telex: 295555LSPG

Telephones: 01-582-7522 01-587-1578

TOKYO, JAPAN

Harukı Hirayama EMS, Inc. Sagami Bldg., 4-2-21, Shinjuku Shinjuku-ku, Tokyo 160, Japan (03) 350-5666 Cable: EMSINCPERIOD



Felex: 2322520 EMSINC.I

1986. All rights reserved.

# Multiple Choice:


#### What do you need in an audio console?

Every application is different; what are your requirements? Should the input section be stereo or mono, mic or line? What kind of outputs and subgrouping do you need? Is a matrix mix important? Do you require mix-minus capabilities? What about metering, timers, tape remotes, mainframes, future expansion?



TV-80 Television Master

So whatever your application, stereo or multitrack production, television master control, on-air, video edit, or mobile installation, consult WHEATSTONE.

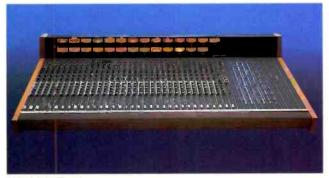

3224 Multi-Track



A-500 Radio On-Air

WHEATSTONE consoles give you all the choices. Our sales engineers listen to your requirements, then work with you and plan your console from the first module to the last VU meter. The result is custom-configured equipment built specifically to your needs.

The truth is, there's only one choice when specifying broadcast equipment: QUALITY. There's simply no room in broadcast for cutting corners; when you're on-the-air the phrase "Time is Money" takes on real meaning.

SP-5 Stereo Production




# **QUALITY**

There's No Better Choice.





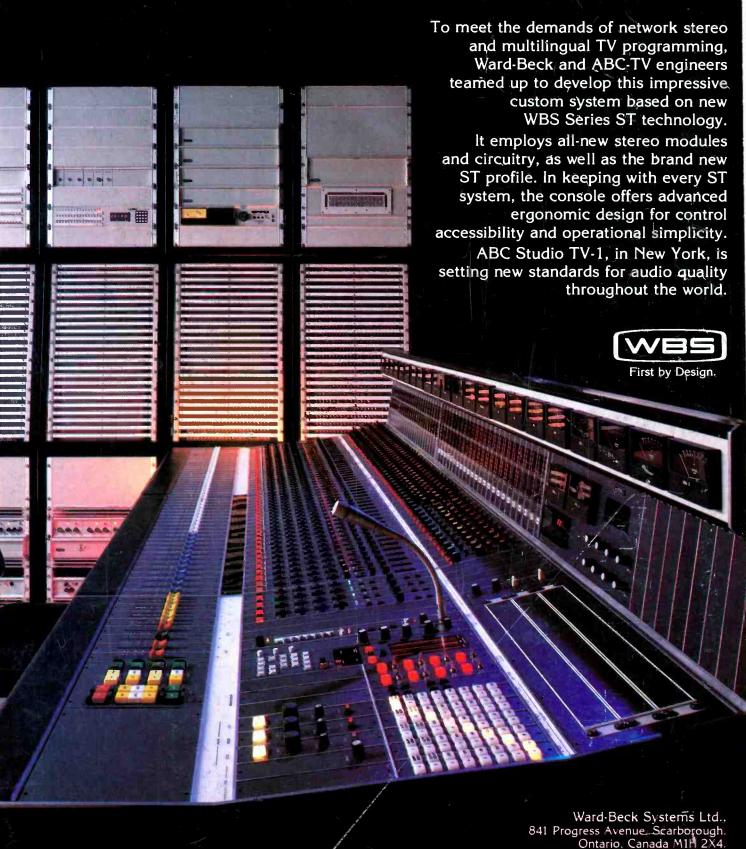

Tel: (416) 438-6550. Tlx: 065-25399.