

BROADCAST[®] engineering

AN INTERTEC PUBLICATION

November 1987/\$3

Maintenance special issue

498100-----UNELN100 XXXXX BEG
F1C83087000000 22 8 1
TERRY LENERLCK DJR
KUCW FM
UNIV CF WASH DC DC
SEATTLE WA 98195

Video Measurements

Channel A OFF-AIR

Bar Amplitude	96.7 IRE	
Chroma-Lum Delay	-54 ns	**
Chroma-Lum Gain	76.4 %	**
2T Pulse K-Factor	11.2 % Kf	
Pulse/Bar Ratio	89.6 %	**

Violated Limits
Lower Upper

The FCC's
new role
p. 87

- **DESIGNED TO PERFORM**
- **BUILT TO LAST**
- **PRICED TO SELL**

THE ADM RM1083 COMPACT AUDIO MIXER

The ADM RM1083 is a self-contained, rack-mountable mixer designed for both mobile and fixed installations. It offers the most needed audio console features not generally found in a portable audio mixer, such as eight inputs that are switchable between microphone and line source, transformer coupling, phase reversal, 30 db of gain adjustment and a high pass filter. A three band equalizer with carefully chosen frequencies optimizes your audio performance for either a mobile or fixed application.

Designed with stereo in mind, the RM1083 provides panning on each input with in/out switching, a line up oscillator bus assignment, eight direct outputs, transformer coupled main and auxiliary outputs and a host of other features make the RM1083 the most versatile rack-mounted mixer available today.

Built with traditional ADM quality, the RM1083 will handle the roughest mobile or fixed use and still deliver the top performance the commercial broadcaster has learned to expect from ADM. The RM1083 is backed by our exclusive five year warranty, as are all ADM products.



Contact ADM, your regional manager or audio distributor.

ADM[®]

ADM Technology, Inc.
1626 E. Big Beaver Road, Troy, Michigan 48084
Phone: (313) 524-2100 TLX 23-1114
Circle (1) on Reply Card

Cross-Country Communication



With the antenna
that works!

In Brownsville,

In Seattle,

In Miami,

Everywhere!



Midwest combines its mobile production unit experience with the latest antenna technology to bring you the S-23, a mobile satellite communications system that enables you to uplink a story from virtually anywhere

The S-23 incorporates a Vertex 2.6M antenna with 50db gain into a unit that is spacious enough for full production capability, yet has excellent weight distribution and a wide GVW safety margin.

An integral deployment and positioning system ensures antenna accuracy, even in heavy weather. You

can choose from a variety of equipment configurations and several domestic and foreign chassis models.

Call for specifications and antenna patterns on the S-23, S-18, S-1 Fly-away or any of our mobile satellite communications systems.

The Midwest S-23. The mobile satellite communications system that works. Everywhere.

2.6M Vertex Antenna

- >50db Gain at 14.25 GHz
- >35db Cross Polar Isolation
- Meets 29-25 log θ FCC 2° Spacing Curves




MIDWEST
Communications Corp.

One Sperti Drive
Edgewood, KY 41017
606-331-8990

Circle (3) on Reply Card

Contents


November 1987 • Volume 29 • Number 11

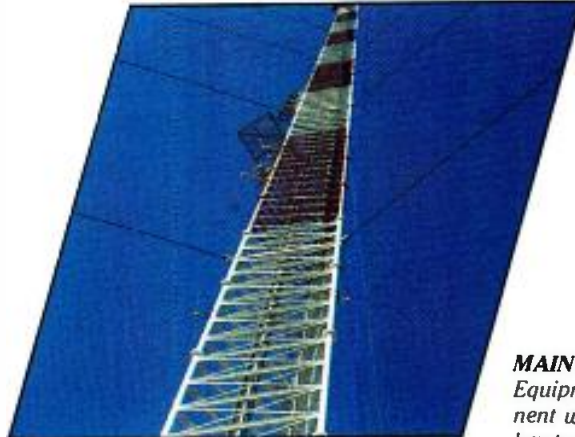

Page 30



Page 42

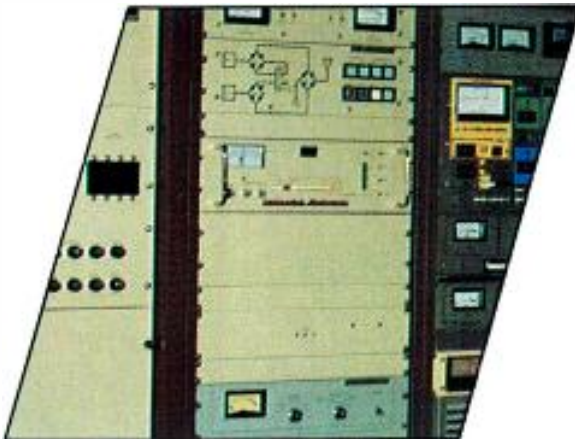

Page 72

BROADCAST engineering

MAINTENANCE SPECIAL REPORT:

Equipment failure is inevitable, whether from routine component wear or from outside forces, such as severe weather. The key to preventing problems is to know your equipment. Our 4th annual Station Maintenance Special Report will examine areas of equipment reliability and maintainability.

22 4th Annual Station Maintenance Special Report

By Jerry Whitaker, editorial director

When a problem occurs, the maintenance engineer is in the hot seat.

26 Controlling ac Line Disturbances

Transient overvoltages represent the greatest single threat to equipment reliability.

• The Scope of the Problem

Transient protection is a good news, bad news situation. First, the bad news

• Facility-Protection Methods

Effective transient control requires attention to all elements in the broadcast plant.

• Circuit-Level Applications

Equipment reliability can be increased by building transient protection into broadcast hardware.

87 The Commission is Watching

By Brad Dick, radio technical editor

Fewer regulations may mean tougher enforcement.

94 Using Digital Oscilloscopes

By Ed Caryl, Tektronix

Today's digital scopes can be powerful tools for the broadcast technician.

106 Testing Stereo Audio for Mono Compatibility

By Mike Coleman, Tektronix

If you want to broadcast quality stereo television, you need to know what your audio system is doing.

ON THE COVER

As broadcast equipment becomes more complex, the requirements for sophisticated monitoring gear for system evaluation and troubleshooting also increases. Our cover this month, features a composite waveform display showing, in part, the display screen of a VM-700 TV system analyzer. (Photo courtesy of Tektronix.)

DEPARTMENTS

- 4 News
- 6 Editorial
- 8 FCC Update
- 10 Strictly TV
- 12 re: Radio
- 14 Satellite Technology

- 16 Circuits
- 18 Troubleshooting
- 20 Management for Engineers
- 122 Applied Technology: Binaural sound
- 136 Field Report: JVC CR-850U videocassette recorder
- 142 SBE Update
- 144 New Products

ONLY HITACHI

Hitachi waveform monitors and vectorscopes get a great reception from broadcast professionals.

Because they get...

...6" rectangular CRTs with internal graticule in both Waveform Monitor V-079 and Vectorscope V-069.

With our Waveform Monitor they get...

...lines 9 through 22 of field 1 or 2, for observation of VIR, VIT and Teletext signals... guaranteed flat response: $\pm 1\%$ over 25Hz-3.6MHz range, and $+1\%/-2\%$ over the 3.6-6MHz range... frequency response selection: FLAT, IRE, CHROMA, DIFF GAIN... horizontal axis sweep selection: 2V, 2V MAG, 2H, or $1\mu\text{sec}/\text{div}$... RGB display, YRGB optional... DC restore... fine adjustment of horizontal-axis position.

And with our Vectorscope they get...

... $\pm 1^\circ$ vector phase accuracy... two loop-thru inputs and a loop-thru external sync input... independent selection of chrominance and sync signals... vector measurement of input A sub-carrier... calibration of input sensitivity to 1V full scale or 75% or 100% saturation, variably controllable 0.5-5 times... non-synced circle, for self-check of gain balance and quadrature phase... differential gain and phase measurements.



For more information call

516-921-7200. Or write Hitachi Denshi America, Ltd., 175 Crossways Park West, Woodbury, NY 11797.

In Canada: Hitachi Denshi, Ltd., 65 Melford Dr., Scarborough, Ontario M1B2G6. Tel: 416-299-5900.



Both screens shown actual size.

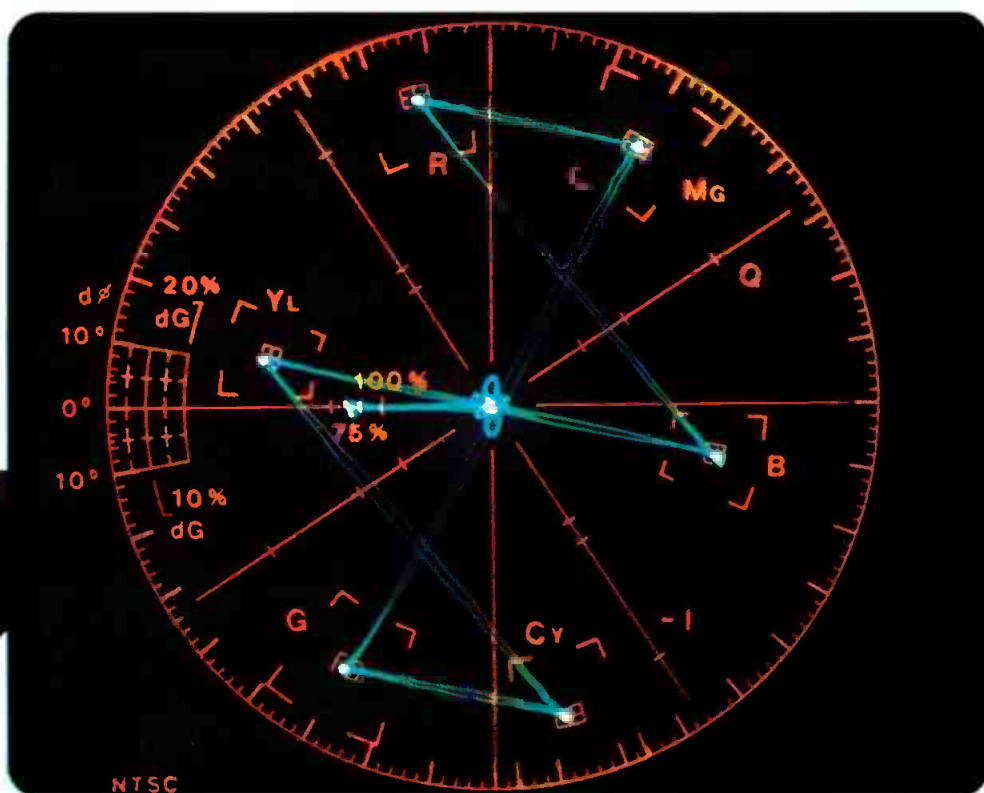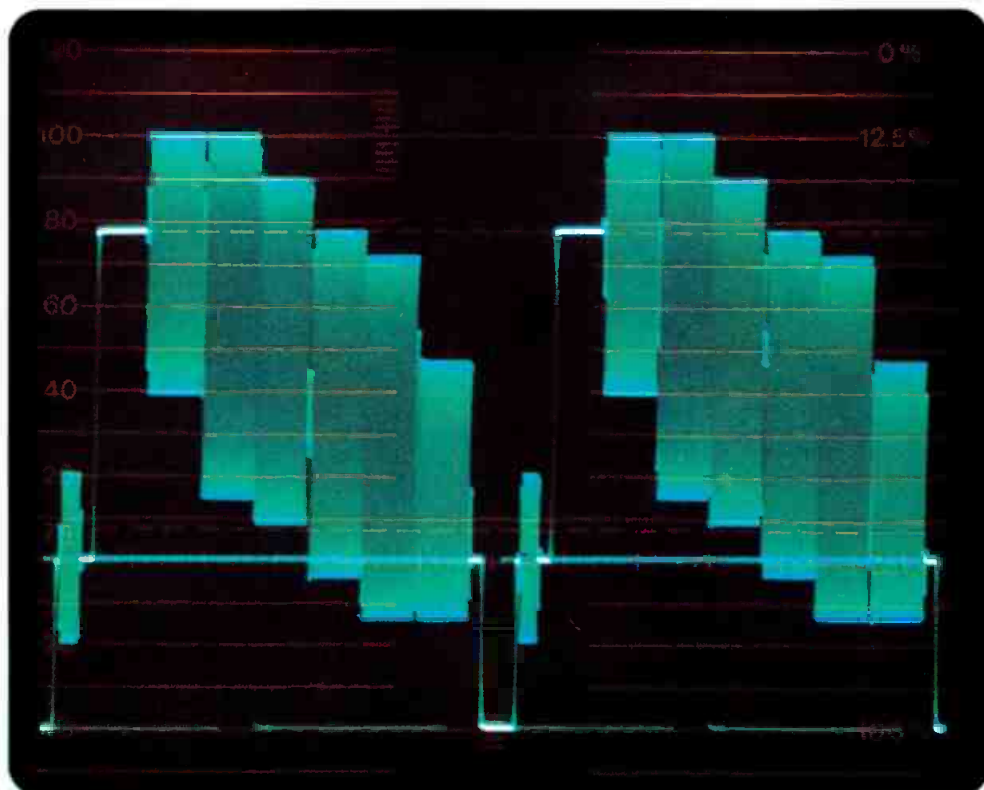

Hitachi Waveform Monitor V-079 & Vectorscope V-069
(Also available: Models V-099 & V-089)

Circle (4) on Reply Card

NAB forms HDTV technology center

Edward O. Fritts, president, National Association of Broadcasters, has announced the formation of the Broadcast Technology Center to bring high-definition television to reality for terrestrial broadcasters.

The announcement was made at the Association of Maximum Service Telecasters' Special Conference on HDTV. The center will be under NAB Technologies, the association's subsidiary formed earlier this year. Thomas Keller, NAB senior vice president, Science and Technology Department, will head the center.

Ben Crutchfield, the department's HDTV project director will work with Keller and other additional staff, which will include engineers and support personnel.

The center will be housed in new facilities, which will include a laboratory and

the necessary electronic and computer equipment.

Some of the funding will come from the \$700,000 already allocated by the NAB for HDTV research. The remainder will come from broadcasters through direct investment, as limited partners, and through earmarked contributions to the NAB for the center's activities. A major industry campaign to provide sufficient financing with an expected budget of approximately \$2 million per year, will be mounted soon.

SMPTE releases study on film rate

A Society of Motion Picture and Television Engineers (SMPTE) study group formed in 1985 to examine a change in the motion-picture frame rate from 24- to 30-frames per second has submitted a report to the society's standards committee. The group was organized under the society's standards committee.

The report, which includes the results of a number of tests and demonstrations, concludes that a 30-frame-per-second rate standard would bring far more advantages than disadvantages to the motion-picture and TV industries.

The 30-frame-per-second rate refers to the number of images photographed by a motion-picture camera and imprinted on a strip of film and is compatible with both the NTSC and the proposed 1,125-line/60-field HDTV standards. Filming at 30-frames per second also would enhance theatrical presentation. Many TV commercials and virtually all music videos are photographed at that rate.

Concentrating its attention on how 30-frame-per-second filming could benefit theatrical presentation, the group established test criteria and generated a series of demonstration films. Three test results were reflected in the report.

The group compared movies photographed at 30-frames per second with

Continued on page 140

BROADCAST engineering

Editorial and advertising correspondence should be addressed to: P.O. Box 12901, Overland Park, KS 66212-9981 (a suburb of Kansas City, MO); (913) 888-4664. Telex: 42-4156 Intertec OLPK. Circulation correspondence should be sent to the above address, under P.O. Box 12937. RAPIDFAX: 913-888-7243.

EDITORIAL

Jerry Whitaker, *Editorial Director*
Brad Dick, *Radio Technical Editor*
Carl Bentz, *Technical and Special Projects Editor*
Paula Janicke, *Staff Editor*
Dawn Hightower, *Associate Editor*
Tom Cook, *Senior Managing Editor*
Lisa Martin, *Editorial Assistant*
Darren Sextro, *Editorial Assistant*
Pat Blanton, *Directory Editor*

ART

Kristi Sherman, *Graphic Designer*

EDITORIAL CONSULTANTS

Fred Ampel, *Audio*
Nils Conrad Persson, *Electronics*
Ned Soseman, *Video*
Michael Heiss, *Consulting Editor*

BUSINESS

Cameron Bishop, *Group Vice President*
Duane N. Hefner, *Publisher*
Stephanie Hanaway, *Promotions Manager*
Cynthia Sedler, *Promotions Coordinator*
Dee Unger, *Advertising Supervisor*
Mary Birnbaum, *Advertising Coordinator*

ADMINISTRATION

R.J. Hancock, *President*
Doug Riemer, *Circulation Vice President*
Jane J. Powell, *Circulation Manager*
JoAnn DeSmet, *Circulation Fulfillment Manager*
Barbara Clare, *Reader Correspondent*

TECHNICAL CONSULTANTS

Eric Neil Angevine, *Broadcast Acoustics*
John H. Baltison, *Antennas/Radiation*
Blair Benson, *TV Technology*
Dennis Ciapura, *Radio Technology*
Dane E. Ericksen, *Systems Design*
Howard T. Head, *European Correspondent*
Wallace Johnson, *FCC/Bdct. Engineering*
John Kean, *Subcarrier Technology*
Donald L. Markley, *Transmission Facilities*
Harry C. Martin, *Legal*
Robert J. Nissen, *Studio/Communications*
Hugh R. Paul, *International Engineering*
Art Schneider, *A.C.E., Post-production*
Elmer Smalling III, *Cable/Satellite Systems*
Vincent Wasilewski, *Communications Law*

MEMBER ORGANIZATIONS

SUSTAINING MEMBERS OF:

- Acoustical Society of America
- Society of Broadcast Engineers
- Society of Motion Picture and TV Engineers

Member,

Association of Business Publishers

ABP

Member,

Business Publications

BPA

Audit of Circulation

SUBSCRIPTIONS: BROADCAST ENGINEERING is mailed free to qualified persons within the United States and Canada in occupations described here. Non-qualified persons may subscribe at the following rates: United States and Canada: one year, \$25.00. Qualified and non-qualified persons in all other countries: one year, \$30.00 (surface mail); \$108.00 (air mail). Back issue rates, \$5, except for the Buyers' Guide/Spec. Book, which is \$20. Rates include postage. Adjustments necessitated by subscription termination at single copy rate. Allow 6-8 weeks for new subscriptions or for change of address. Second class postage paid at Shawnee Mission, KS.

BROADCAST ENGINEERING Volume 29, No 11 (USPS 338-130) is published monthly (except in the fall, when two issues are published) by Intertec Publishing Corporation, 9221 Quivira Road, P.O. Box 12901, Overland Park, KS 66212. Second class postage paid at Shawnee Mission, KS, and additional mailing offices. POSTMASTER: Send address changes to BROADCAST ENGINEERING, P.O. Box 12983, Overland Park, KS 66212.

Photocopy rights: Permission to photocopy for internal or personal use is granted by Intertec Publishing Corporation for libraries and others registered with Copyright Clearance Center (CCC), provided the base fee of \$2.00 per copy of article is paid directly to CCC, 21 Congress St., Salem, MA 01970. Special requests should be addressed to Cameron Bishop, group vice president. ISSN 0007 1794 \$2.00 + \$0.00.

© 1987. All rights reserved.


Advertising offices listed on page 151.

INTERTEC
PUBLISHING CORPORATION

**WHEN LOOKING FOR THE LATEST TECHNOLOGY
IN UHF AND VHF TRANSMITTERS...**

Comark's recent track record of technological innovations is unmatched by any other US manufacturer. This impressive history of recognized advancements demonstrates our commitment to the future. A commitment backed by continuing substantial investments in research and product development activities.

Incorporating new technology into today's products is your assurance that the Comark transmitter purchased now will still be current in the year 2000.

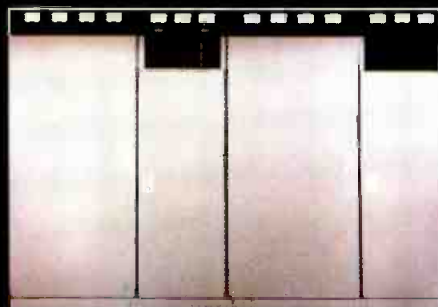

COMARK COMMUNICATIONS, INC.
A Thomson-CSF Company

Route 309 & Advance Lane • Colmar, PA 18915
(215) 822-0777 • Telex: 846075

Circle (5) on Reply Card

www.americanradiohistory.com

Protecting the bottom line

The broadcast industry lives on technology. It thrives on electronic gadgets. Without competent engineering support, however, our electronic tools of the trade are of little value. Education for engineering personnel is, therefore, critically important, if, for no other reason than to protect the *bottom line*.

A broadcast engineer's most basic responsibility is equipment maintenance. It also is a responsibility that requires continuing education to keep pace with technology. This is ideally recognized by some method of certification of technical competence.

Although the first class FCC license is dead and buried, the concept of technical certification of radio and TV engineering personnel remains a high priority with broadcasters across the country.

It is our belief that the single most important industry-wide program designed to recognize technical competence with format certification and to encourage continuing education is the Society of Broadcast Engineers' certification program.

When the commission threw in the licensing towel in 1981, the SBE's program became the only game in town. First conceived in 1973, the effort was designed to provide a method whereby technical personnel could be evaluated by their peers.

The society doesn't claim that an engineer can't be qualified unless certified. Quite the contrary. Under the certification program, applicants need sufficient on-the-job experience to even take the examinations for the higher levels of certification.

The SBE has structured the examination and requalification process so that it is practically impossible to obtain—or retain—SBE certification without being actively involved in broadcasting. A major component of recertification involves education, either through continuing education unit (CEU) credits, attendance at major engineering conferences, authoring technical papers or other activities that demonstrate you are continuing to keep pace with technology.

Therein lies the major benefit to the individual of having SBE certification. It proves to the industry that you have a measure of experience, and that you have been able to use that experience and your technical expertise to pass an industry-recognized examination.

Much concern has been expressed in recent years about the lack of young people entering the broadcast engineering profession. Our industry has let this situation develop by failing to actively recruit talented engineering personnel from colleges and universities, and then failing to pay those engineers competitive salaries with the semiconductor and aerospace industries.

Broadcasters can correct this problem by recognizing that we all live—or die—by technology. And in the final analysis, every station's bottom line is directly affected by the competence of the line engineers who operate and maintain the production, distribution and transmission equipment.


The best way to protect that bottom line is for management to encourage continuing education and certification through the SBE's program, and to then pay their engineers a competitive salary.

Now, some six years after the official demise of the first class license, the broadcast industry has a standard by which we can measure technical competence. That standard is the SBE certification program.

SBE certification gives engineers a goal they can work toward. Moreover, according to the last three salary surveys conducted by **Broadcast Engineering**, personnel who have taken the time and trouble to gain certification are being rewarded for their efforts with bigger paychecks.

The equipment that broadcasters use is becoming increasingly complex, and this hardware requires competent technical personnel to keep it running. The need for trained engineers has never been greater. Our industry must look seriously at this issue, if only to protect the bottom line.

PURE PROGRAMMABLE POWER

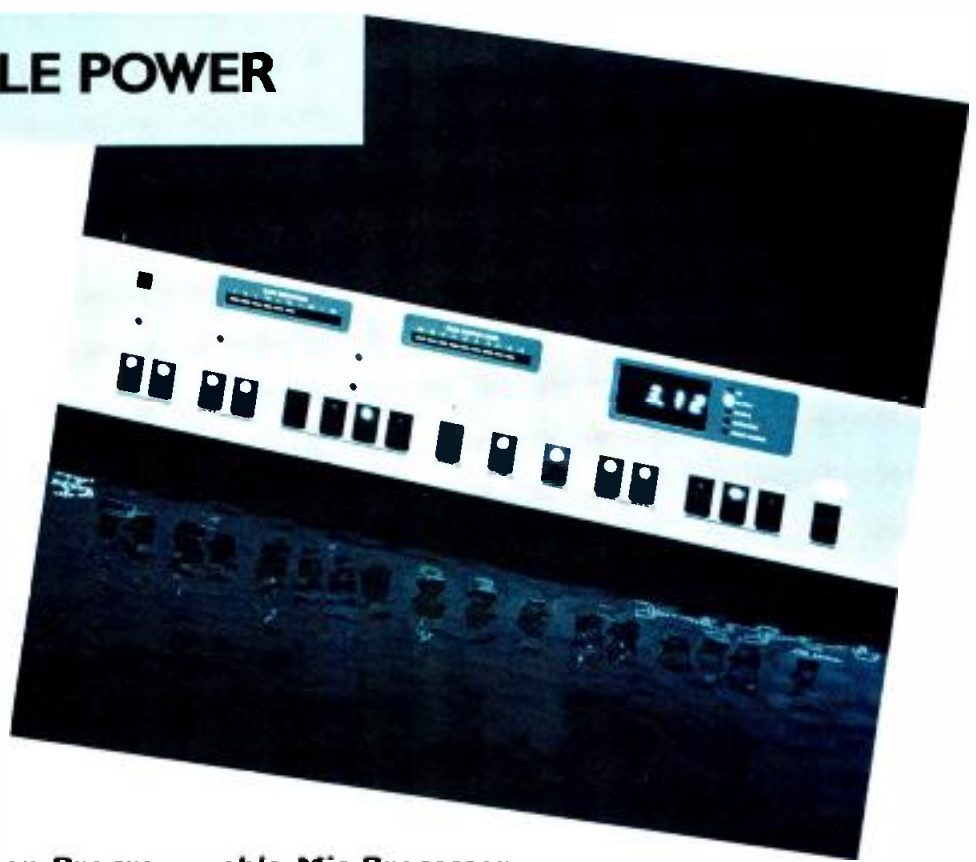

Introducing the new Orban Programmable Mic Processor

- 3-band parametric equalizer with "constant-Q" design and full notch filtering capability
- Smooth, transparent compressor with adjustable release time
- Noise gate (attenuates control room noise by up to 25dB) and compressor gate (prevents noise rush-ups during pauses)
- De-esser controls excessive sibilance

And it's programmable.

- 32 memory registers store complete control setups for instantaneous recall
- Effects send and return (with programmable return gain) simplifies integration of external reverb or other processors
- Built-in connectors for remote control, MIDI, and future serial interfaces
- Optional second-channel slave for dual-mono or stereo operation (Model 787A/SL)
- Standard line-level input; optional Jensen transformer mic preamp with 48V phantom powering
- Security lockout code prevents unauthorized tampering with presets

Orban's powerful, new 787A Programmable Mic Processor provides an efficient way to optimize the sound of your DJ and newsroom mics and then recreate these setups every day for maximum punch on the air.



The 787A combines clean-sounding, Orban-quality analog processing with the control and programmability made possible by contemporary digital technology.

Complete settings can be stored in any of 32 different memory registers for instantaneous recall at the beginning of each airshift, or in a different studio at some later date. The 787A is also the perfect tool for processing commonly-used talent in video and film post-production work.

Call or write today to find out more about Orban's powerful new Programmable Mic Processor, an efficient and consistent way to optimize your mic channel and talent for maximum impact on the air.

Orban Associates Inc.

645 Bryant St., San Francisco, CA 94107 (415) 957-1067 Telex: 17-1480 FAX: (415) 957-1070

FM technical rules are amended

By Harry C. Martin

The FCC has amended its FM station classification system by adding to the minimum and maximum power and antenna-height requirements a *reference distance* for each class reflecting the expected distance to the 1mV/m (60dBu) contour, rounded to the nearest kilometer. Under the new rules, stations are classified according to their maximum power restrictions, power/height combinations and new reference distances.

The commission proposed rule changes in April 1986 to clarify and simplify the allocation rules, particularly those affected by the creation of new station classes in Docket 80-90, and to expedite processing of FM station applications.

The first area of concern was the classification of stations not fitting into the basic classification system, which is based on antenna height and power. In this connection, the commission did not adopt its originally proposed *index* system, which would have employed a mathematical formula based on maintaining as a constant, the maximum predicted distance to the 1mV/m contour. Instead, the new reference-distance system will be used to classify a station if its class cannot be determined by its power or by its power/height combination. Overheight stations will be classified according to where their particular reference distances fall in relation to preset *class contour distances* for the six classes of FM stations. As in the past, antenna height may exceed the class maximum, now termed reference height, if the station's power is reduced. However, power cannot exceed the class maximum, regardless of the distance to the 1mV/m contour.

Also amended were rules allowing technical modifications to certain short-spaced FM stations. The table of mileage separations governing modifications to grandfathered short-spaced FM stations has been eliminated. Under the new rules, a grandfathered station may modify its facilities as long as its 1mV/m contour is not extended toward the station with which it is short-spaced. Also,



second and third adjacent-channel stations are now included in the commission's policy permitting short-spaced stations to increase their facilities pursuant to a mutual agreement.

Predictions of coverage methods have been modified to require calculations based on the maximum ERP of the main lobe regardless of orientation. This refinement is necessary because the previous method of predicting coverage, based only on the horizontally radiated power of the FM antenna, is not an accurate indicator of coverage when applied to the higher and more complex antennas of today's FM stations.

With regard to the proposed modifications of intermediate frequency (IF) separations for station Classes B1, C1 and C2 to ensure no overlap of the 30mV/m contour, no action was taken. This issue will be the subject of a future proceeding.

Proposed rules for non-licensed RF devices

In another action, the commission proposed changes in Part 15 of its rules to create a new general class of RF devices with increased frequencies of operation and no restrictions on usage, bandwidth or type of modulation. Established nearly 50 years ago, the rules for non-licensed use of RF devices allowed operation using low-level RF signals and did not require individual licensing, as long as no harmful interference to licensed services was caused, and the device did not generate field-strength emissions exceeding a certain level.

The proposed rules are an attempt to restore the technical flexibility originally foreseen for non-licensed devices. The current regulations, based on a general field-strength standard, have been amended over the years to permit operation on higher frequencies by specific devices. The inconsistent Part 15 standards are the result. Furthermore, improvements in equipment and changes in frequency allocations of authorized radio services have brought about the need for revision of standards for protection against interference to licensed radio services.

Although the proposed rules attempt

to eliminate unnecessary and exceedingly restrictive technical regulations, in some cases they would be more restrictive than those now contained in Part 15. To avoid hardship, the commission has proposed a grandfather period, usually to last 10 years, during which manufacturers may continue production of existing devices.

The commission's proposal also includes RF device kit authorization procedures. No changes are proposed for other RF device authorization procedures.

Cable rule proposals and changes

The commission initiated a rulemaking to revise the signal availability standard of its cable TV rules and, simultaneously, amended several rules implementing the Cable Communications Policy Act of 1984.

Cable systems will continue to be considered as facing effective competition, which frees them from local rate regulations on the basis of the availability of three Grade B or significantly viewed signals. However, the proposal would alter the assessment of the significant viewing standard by basing it on viewership data in individual cable communities. Previous studies had to be made on a countywide basis. County viewership data would continue to be used to establish a threshold standard for viewership, but community data will be used in making final determinations in contested cases.

The commission counts a signal as available as long as its Grade B signal covers a substantial portion of the cable community. A 75% bench mark for substantial community coverage is being proposed now.

The agency also is requesting suggestions for alternatives to the current method of establishing the basis for waiver of its coverage-based effective competition standards. In this connection, the commission is seeking less expensive, but reliable methods of field-strength measurement. It suggested permitting cluster measurements instead of mobile runs currently required, for measuring signal strength. I:~(=)))

Martin is a partner with the legal firm of Reddy, Begley & Martin, Washington, DC.

One touch and you'll know it's Grass Valley Group.



The solid Grass Valley Group touch. The exceptional Grass Valley Group service. The reliability only Grass Valley Group can offer. We call it the Horizon Routing System. You'll just call it terrific.

Grass Valley Group®

A TEKTRONIX COMPANY

THE GRASS VALLEY GROUP, INC. — P.O. Box 1114 — Grass Valley, CA 95945 USA — Telephone (916) 273-8421 — TRT: 160432
OFFICES: New York (201) 845-7988; District of Columbia 301 622-6313; Atlanta (404) 493-1255; Chicago (219) 264-0931;
Minneapolis (612) 483-2594; Dallas Fort Worth (817) 483-7447; Los Angeles (818) 999-2303; San Francisco (415) 968-6680.

Circle (7) on Reply Card

www.americanradiohistory.com

By Carl Bentz, technical and special projects editor

As an engineer, I can't help but ask myself, "How did this happen?" It takes little thought to reach a conclusion. I like to think of myself as a conscientious engineer (and magazine editor now) with a concern for quality. Each one of you, I'm sure, feels the same way. We've never said, "That's good enough," when in our minds we knew that it could be better if we didn't have to give in to the force that really controls a broadcast opera-

Several critics of BE's positive comments about S-VHS felt that the pictures "stunk." And that could be—not every demo goes as planned. But, not everyone sees television as engineers watch it in the control room on an \$8,000 precision monitor from a distance of several feet. Across the living room from the television, say 12 to 15 feet or more, how much of the snow shows? Yes, snow. Every part of a transmission system has potential to introduce video noise (snow) and, unless properly maintained, even your half-million-dollar transmitter, installed just last year, may be producing a blizzard. STLs, DAs, exciters and home TV tuners may destroy what you cre-

Yes, we as magazine editors are no longer in the trenches. We don't have to keep a transmitter on the air, register a camera or fix a VTR tracking problem. (Frankly, sometimes we miss it, and, at the same time, we are sorry that some of you are saddled with that responsibility.) We are in a position to help monitor the industry and tell what we see. When we signed on to this tour of duty at **BE**, we pledged to ourselves not to be the pot that calls the kettle black, unless it is. The fact is, what we have recently observed, if it isn't black, is certainly a dark gray.

The Abekas A42 Digital Still Store

The Abekas A42 is used daily at television stations and production facilities all across the United States and Canada. With over 450 machines delivered, the A42 has proven to meet the performance and reliability demands of a wide variety of customers. Networks such as ABC, CBC, CNN, HLN, and NBC. Major independents like KCOI, WWOR, and WTBS. Post production houses like Action Video, One Pass, and Unitel. Mobile trucks

such as Clearwater, Greene Crowe, and Northwest Mobile. Rental houses like All Mobile Video, Bexel, Video Rentals.

In short, the A42 has become the clear choice of all those who want to juggle thousands of pictures with cost-effective ease.

The A42 Digital Still Store offers a wide variety of operating advantages, including: on-line hard disk storage of up to 1050 frames/2100 fields... advanced digital signal processing... outstanding multi-generation capa-

bility for graphics composition... digital tape cartridge for cost-effective off-line storage... optional library system for sophisticated management of both on-line and off-line pictures... single or dual channel configurations.

To find out why the A42 has become the most popular still store, contact: Abekas Video Systems Inc., 101 Galveston Drive, Redwood City, CA 94063. (415) 369-5111.

Abekas

Video Systems Inc.
Now Anything is Possible.

Circle (8) on Reply Card



The most popular still store

Know your DA

By John Battison, P.E.

We ended last month's column with a comment on careless logging. However, there are other real causes of antenna-monitor reading errors. If you have inherited an antenna system that is not properly documented, you should first check the original construction permit application and form 302 that were filed when the station first went on the air.

This information, together with all later filings should give the whole story. In many cases, this material is not available because of ownership changes and various engineers who have lost the material. Before you can be sure that the DA you have just inherited is working properly, you must first know how it is supposed to work. So, where do you find the data?

Locate the data

Various services in Washington will pull a station's files and make a copy of them for you. The cost can range from \$30 to \$60, depending on the time required to find the material and the number of pages to be copied. These services are usually well worth the cost.

As you read the material, check your installation against it and note any differences. There will be many differences in most stations. We'll assume that the antenna monitor is working properly, but the readings do not match those of the licensed parameters. Change the tower inputs and determine if you still get the same readings on different towers. You must, of course, make allowances for the tower parameters.

A cause of varying antenna-monitor readings that seems to be surfacing recently is sampling line problems. Most consulting engineers specify the sampling lines to be of equal length. This practice eliminates one potential error source. The sampling line length is, therefore, controlled by the distance to the farthest tower. The closer towers will then have excess line.

The commission requires that all sampling lines be stored and subjected to the



same climatic and temperature conditions. This generally means burying the lines outside, or preferably indoors in a temperate area. If you observe antenna-monitor reading variations during extreme temperature change, be prepared to check the location of the excess lines. The commission will usually accept antenna-phase monitor readings within $\pm 3^\circ$ and a ratio within 5% of the license value. Some stations may be required to maintain tolerances of ± 10 or 1%; these systems are known as *critical arrays*.

Careless logging

Careless logging is a problem at many stations. Typical logging errors include recording phase angles and base currents that are consistently outside tolerances and for which no corrective action appears to have been taken. When this happens, it's time to perform a skeleton proof of performance.

In some cases, if proper attention had been paid to log keeping during the preceding years, a costly license renewal delaying proof of performance would not now be required.

In fact, much of the consulting engineer's work is frequently due to carelessness and inattention to detail on the part of log keepers and the people who are responsible for ensuring that proper log entries are made.

On the other hand, such items as widely varying phase and current ratios on a particular tower usually indicate that changes have taken place in either the power supplied to the tower or the phase-monitor system.

Example

Such readings also might be caused by the problem I found at one station. This station had trouble obtaining consistent antenna-monitor and common-point current readings. Everything at the transmitter looked good, so I visited the tower bases. The reference tower was inspected first.

In the undergrowth at the base of the tower, I found the ATU cabinet. It had tilted, and the legs had rusted away. The cabinet was resting against the reference tower. Much of the time there was no

firm contact. But, when the wind blew, the cabinet sometimes made a good contact with the tower. If the operator happened to be taking a reading at that time, then, of course, the readings were incorrect. Resetting the legs and securing the ATU cabinet cured the problem.

Know the rules

Some stations still do not maintain an up-to-date set of the FCC's rules and regulations. Although the commission no longer updates its old rules or provides them in a bound edition, they are available from other services.


There are four ways to obtain a set of the commission's rules and regulations. You can order a set of the Code of Federal Regulations, issued annually by the Government Printing Office. Order No. 47 CFR Parts 0-19, which contains part 17 tower regulations and No. 47 CFR Parts 70-79, which contains parts 73 and 74. The cost is \$34.

Updated subscription services are available from three companies: Pike & Fischer, Rules Service Company and the Broadcast Service Bureau. These companies regularly update copies of the rules so you are sure to be informed about recent rule changes.

The commission expects stations to have a reasonably up-to-date copy of the rules on hand. Don't let the minor cost of obtaining them cause your station to be cited for an infraction of commission regulations.

Battison, PE's consultant on antennas and radiation, owns John H. Battison & Associates, a consulting engineering company in Columbus, OH.

THE NEW CRL IS *Digital Friendly*

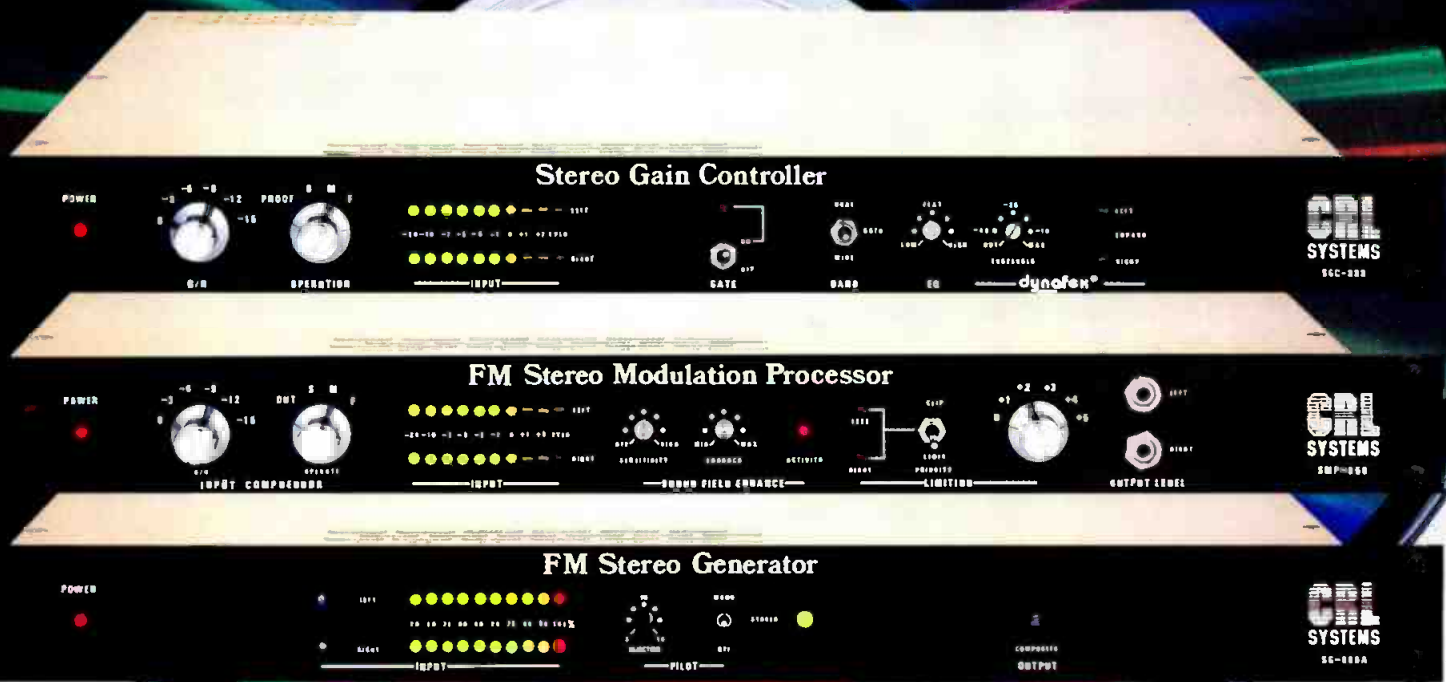

The Third Generation "800" Series

Since the first Compact Discs became available over three years ago, CRL engineers have been working to perfect circuits that would make it possible to get that exciting digital sound through the transmission system to your listener's receivers.

Our totally new **STEREO GAIN CONTROLLER** was designed for digital. It has to be heard to be appreciated. It includes Dynafex® noise reduction for a S+N/N ratio greater than 80 dB!

The new **STEREO MODULATION PROCESSOR** uses our exclusive transfer function limiter for maximum transient quality and impact. Add to that, the new Stereo Soundfield Enhance circuit for maximum separation, and a new filter design for superb baseband protection.

Top it off with our newest version **SG 800A STEREO GENERATOR** with high resolution digital modulator and you have the loudest, most transparent "on air" sound yet! We call it **DIGITAL FRIENDLY**.

For a **DYNAMIC** sound that will thrill your audience and intimidate your competition call now to audition these great new processors on our **SATISFACTION GUARANTEED** sale plan. It's just \$4995 for a limited time. . .

800-535-7648

lex® is a registered trademark of Circuit Research Labs, Inc.

**THE
PROFESSIONAL'S
CHOICE**



CRL Systems
2522 West Geneva Drive
Tempe, Arizona 85282
(800) 535-7648 (602) 438-0888
TELEX: 350464 CRL TMPE. UD.
FAX (602) 438-8227

Circle (9) on Reply Card

www.americanradiohistory.com

Satellite user's conference

By Elmer Smalling III

This year's annual satellite user's conference was held at the Infomart Center in Dallas. The event included more than 60 exhibitors of satellite paraphernalia and services as well as many papers and symposiums over the 3-day session.

Because the shuttle program has been discontinued and the backlog of military payloads and those, other than commercial satellites, that are slated for launch when the space shuttle project gets back on track, American ventures will have to rely on launching services, such as the European Arienne, the Chinese "Long March" and Japanese facilities for some time to come.

Manufacturers of satellites and space vehicles will be gearing designs to very wideband communications. These systems allow for reconfiguration by on-board software for large area or spot transmission or switched-beam data transmission. This scheme is used for the proposed advanced communications technology satellite (ACTS) being designed by TRW. The ACTS system will include TDMA digital transmission at rates from 4.8kbps to multiple T-1 (6Mbps) using 110Mbps beams, a satellite-borne switching matrix, Ka-band transmission, satellite-to-satellite laser transmission and a generation of new transmitters and receivers permitting bit-error rates as low as 10^{-6} . This technology should produce ripples that will affect broadcasters in the near future with an increase in the amount of digital transmission.

On the second day of my visit, many more exhibits were present than potential buyers. Most of the exhibits were directed at Ku-band and VSAT applications with at least two exhibitors touting launch vehicles. More European services were at this conference than at previous ones—probably because of the problems with NASA's launch capabilities.

Most of the exhibits dealing with terminals and transmission featured digital gear rather than analog video equipment. SCPC and TDMA encoders are available with data rates up to 100Mbps



along with equipment for the newest communications buzz topic—*cellular data*. Systems that tie a personal computer to VSAT (very small aperture terminals) networks were shown, in the hopes that every office will be made into a mini-teleport.

If shows such as this are a barometer of the popularity of technology, C-band is becoming less popular. Of the 60-plus exhibits at the show, only a few mentioned C-band, and then only in the context of C-band/Ku-band applications.

New to the market

Two products stood out as being new and within the reach of most satellite communicators. One was a novel method for deicing antennas, long cable or waveguide runs, using a cable that heats up as the temperature gets lower. The cable appears similar to TV twin-lead with two conductors, separated by about 1/2-inch, in a poly jacket. The cable can be wrapped around horizontal runs of coax lines or waveguide, which might collect ice. It also can be fitted on the back of a dish antenna to prevent ice or snow accumulation.

The product contains a chemical substance that changes its electrical resistance with a change in temperature. The colder the temperature, the warmer the cable. As the resistance lessens between the two conductors, current flows to generate heat over the length of the cable. This simple system eliminates thermostats, controls, blowers and other elements that need attention. The deicing cable is available to operate at voltages (12V, 120V and 240V) that would normally be present at antenna sites.

The second new product shown by many of the exhibitors was the molded or stamped Ku-band off-set feed VSAT antenna. These antennas are made by processes similar to those used for home C-band dishes. The gains, apertures and illumination efficiencies are good, especially when the cost is considered. This new, inexpensive breed of offset-fed Ku-antennas is available in sizes from 0.4 meters to 3 meters. Many include simple pole-mounting units making installation easy. Most are at least 1.3 meters in di-

ameter, thus meeting the FCC transmission requirements. The popularity of low-cost VSAT antennas will depend on the ease with which they can be pointed and mounted on the ground or on buildings.

In addition to the hardware exhibits, teleconferencing service companies were present. The relative ease of installation of VSAT antennas and the availability of many new lines of portable terminal equipment have caused service vendors to treat VSAT locations as simple LAN nodes. These service companies offer the small business conferencing and data communications with desirable features, such as high-baud rates and inexpensive use rates.

Leasing SCPC links has become an economical way to teleconference and has created much activity on many old and tired transponders. Many digital video transmission systems were shown because these systems require large transponder bandwidths and high data rates (at least 45Mbit data rates for a marginally acceptable signal or 88Mbits for high-quality video). Lower data rates require complicated algorithms that compromise some aspects of a full-motion video picture and require expensive encoding and decoding equipment. Delta coding and predictive coding are at the forefront of digital-video bandwidth compression-encoding schemes.

Smalling, BE's consultant on cable/satellite systems, is president of Jenel Systems and Design, Dallas.

Editor's note: If you have a particular subject in the realm of satellite communications in which you are interested, or one that you would like explained or investigated in future columns, please write to **Broadcast Engineering**, P.O. Box 12901, Overland Park, KS 66212-9931.

Doing it right Doing it now



***Odetics
delivers cart machines
not empty promises***



Call toll free 800-243-2001 or 714-774-2200

Circle (10) on Reply Card

www.americanradiohistory.com

Inside digital technology

By Gerry Kaufhold II

Microprocessors are changing the way we use and maintain broadcast hardware. Although many different microprocessors are available today, the fundamental mode of operation can be modeled by the Z-80 microprocessor. The Z-80 has become a de facto standard for use in products that control machines in real time.

This month we will continue our examination on how the Z-80 operates. (Figure 1 of last month's column shows a typical pinout for the Z-80.)

Address and data

System control signals work in conjunction with the address lines and data lines to transfer information to and from the Z-80. The address lines set up a valid memory address on the bus.


The address bus is used for three functions: acquiring instruction operation codes from read-only memory (ROM); writing to or reading from read-write memory (RAM); and performing system input/output cycles. Typical I/O operations include the following:

- When a 16-bit address appears on the address lines, and both the MREQ and RD signals go low at the same time as M-1, then an OPCODE FETCH reads a valid Z-80 instruction from memory into the OPCODE decoder of the Z-80.
- When a 16-bit address appears on the address lines, and RD and MREQ both go low, data is read from memory into the Z-80.
- When a 16-bit address appears on the address lines, and WR and MREQ both go low while RD remains high, then data is written from the Z-80 into the selected memory location.

For input/output cycles, only the lower eight address lines are active. The upper eight lines duplicate the address selected by the lower eight. When IORQ goes low along with either RD or WR, an input/output cycle occurs.

The Z-80 family

The Z-80 family of integrated circuits

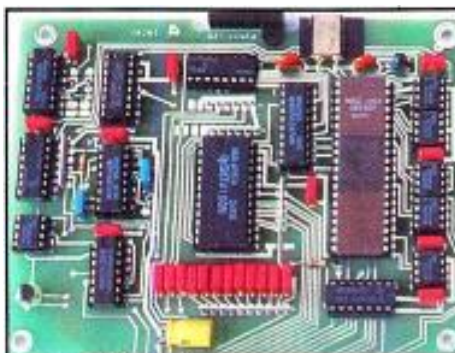

includes special chips that directly connect to the Z-80 and use input/output cycles for their control. These ICs include:

- a serial input/output chip that connects to video terminals or telephone modems.
- parallel input/output chip that connects to parallel printers.
- direct memory access (DMA) controller that connects to floppy disk drives.
- counter-timer chip that provides timing signals.

Memory refresh

Two types of volatile random access read-write memory are available for use with a Z-80 system: *static* RAM and *dynamic* RAM. Static RAM memory cells comprise flip-flop circuits. Because flip-flops have two stable states, one (1) or zero (0), static RAMs will store information as long as power is applied. Static RAMs have rapid access but dissipate a large amount of energy (relatively speaking) and cannot be integrated with as many bits of storage per integrated circuit as other types of memory devices.

Dynamic RAM memory cells comprise field-effect transistors (FETs), which store a charge on the capacitance of the gate element. Dynamic RAMs run cooler than static RAMs and can be integrated many times more densely than static RAMs. Because dynamic RAMs store information on capacitive elements, they must be continually recycled or refreshed.

Charges stored in dynamic RAMs are recycled by a refresh circuit. This circuit counts through the memory space and reads the contents of each address. The circuit then rewrites the data back, thus refreshing the stored charge of each memory cell.

Refresh timing

Whenever dynamic RAM memory cells are used by the microprocessor, the cells must be available for memory access cycles from the system bus. The dynamic RAM refresh circuits must be synchronized to avoid causing delays to the microprocessor.

The Z-80 provides a signal called REFRESH, which is *active low*, and

which signals to the dynamic RAM refresh circuits that the bus is clear.

In addition to providing the active low refresh signal, the Z-80 also increments its address counter onto the system address bus, and eliminates the need for the dynamic RAM refresh circuits to have a binary counter.

This complicated feature of the Z-80 is called *automatic dynamic RAM refresh*. It is one of the reasons why the Z-80 is so popular among designers of microprocessor systems.

An unfortunate side effect of automatic dynamic RAM refresh is that the address bus becomes very busy. For the technician trying to analyze a Z-80-based computer system, it might appear that a lot of extraneous signals are flying around.

When using a multiple-channel logic analyzer to view signals on a Z-80 system, it is important to remember that the Z-80 performs automatic dynamic RAM refresh continually. Depending on the capabilities of the logic analyzer, there may be ways to define the triggering setup so that the automatic dynamic RAM refresh signals will not be displayed, even though the signals are running all the time.

For those users who are limited to the use of an oscilloscope, the parallel system bus in a Z-80-based computer system may be nearly impossible to troubleshoot in the field.

If you thought automatic dynamic RAM refresh muddled up the waters, next month we will look at *interrupts*.

Kaufhold is an independent consultant located in Tempe, AZ.

Audio processing for AM improvement.



In the several years since its introduction, OPTIMOD-AM Model 9100A has become one of the most-often used tools for improving AM audio.

Now there is a new opportunity for AM improvement. Over a year ago, the National Radio Systems Committee brought broadcasters, equipment manufacturers, and receiver manufacturers together to talk about a voluntary national transmission standard that would make wideband high-fidelity AM radios practical.

Today, after hundreds of hours of discussion and study, the standard finally exists that will allow receiver manufacturers to increase and flatten their frequency response without risk of increased interference. But for them to do this, broadcasters must implement the standard: a "modified 75 μ s" pre-emphasis specification brightens up the sound on older radios while minimizing interference to adjacent stations, while a sharp-cutoff 10kHz low-pass filter specification protects the second adjacencies by limiting occupied bandwidth.

Receiver manufacturers have stated their willingness to replace their current AM receiver designs (with their telephone-quality fidelity) with AM receivers having full 10kHz frequency response—but *only* if and when the NRSC standard is fully adopted by broadcasters. For the NRSC standards to be successful, broadcasters must change over *quickly*. If the new high-fidelity receivers generate complaints of interference caused by stations not complying with the new standard, the receiver manufacturers will revert back to the present low fidelity 3kHz designs! *Everyone* will lose.

Orban was the first to propose and implement AM pre-emphasis and low-pass filtering, and we were heavily involved in the Committee work and research. We strongly endorse the new NRSC standard. It's good engineering *and* good business, and we are making it easy for all OPTIMOD-AM owners to comply.

Introducing the new Model 9100B:

It complies fully with the NRSC standard while retaining the features that have made OPTIMOD-AM Model 9100A the choice of so many stations concerned about competing with FM. The 9100B increases coverage, improves source-to-source consistency, and yields superb quality on both voice and music. And, the new standard allows us to make the new OPTIMOD-AM even louder!

Like its predecessor, the new 9100B can be configured to operate optimally in mono, C-QUAM® stereo, or Kahn stereo. Mono units can be field-upgraded to stereo by simply plugging in additional cards.

For owners of OPTIMOD-AM Models 9100A and the older 9000A:

We underscore our commitment to the new standard with low-cost Field Upgrade Kits to add the NRSC-standard pre-emphasis and filtering. They are available through your authorized Orban Broadcast Products Dealer.

To find out more about the NRSC standard, and about Orban's *new* 9100B OPTIMOD-AM, or the Upgrade Kits for the 9100A and 9000A, please call or write.

Why not copy this ad for others at your station who would like to know what's in store for AM radio.

Orban Associates Inc.

645 Bryant Street, San Francisco, CA 94107 USA
Telephone (415) 957-1067 or (800) 227-4498 Telex 17-1480

orban

Circle (11) on Reply Card

Maintaining switching power supplies

By Gerry Kaufhold II

The key to troubleshooting switch-mode power supplies lies in understanding how they operate. Despite their apparent complexity, when viewed as individual circuits operating within one system, troubleshooting is easier.

In last month's column, we presented a simplified block diagram of a switching power supply (Figure 1). The four major elements of the system are:

- the ac-line input stage.
- regulated output supply.
- low-voltage power supply.
- the system control unit.


Refer to Figure 1 in last month's column as we continue our examination of how a switching power supply operates, and how to service it when a failure occurs.

Control stage

Input to the control stage (section D) is taken from one of the dc output lines and fed to an error amplifier through an isolating device. This signal may be derived from a *sense winding* of the transformer or via an opto-isolator. The error amplifier compares this feedback voltage against a known reference. The pulse-width modulator varies the on and off times of the power transistor and thereby determines the output voltage of the supply.

The base drive circuitry that feeds the control pulses to Q1 can become quite involved and accounts for much of the complexity of a line-operated, switch-mode power supply. Instead of applying an excess of drive current to push Q1 into heavy saturation, modern power-supply designs act as tuned circuits. In order to obtain maximum efficiency during the turn-on and turn-off periods, base drive current must follow the characteristics of the power-handling devices used (the switching transistor and inductor).

When troubleshooting such supplies, use an oscilloscope camera (one that is operating properly, if available) to photograph the base drive waveform of the unit under test. Some power-supply

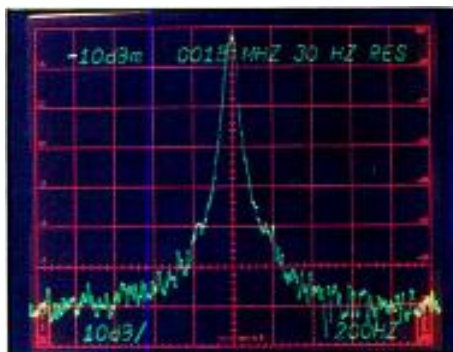

maintenance manuals also provide waveforms for reference.

Planning for maintenance

Whenever new equipment is purchased, incoming inspection tests should be performed and the results documented before the equipment is installed. This is especially true for equipment that contains a switching power supply or any switching-regulator circuitry.

Unfortunately for broadcast engineers, most equipment that contains a switching supply will not include a schematic diagram or a theory of operation description, because the supply is an OEM (original equipment manufacturer) module that the broadcast manufacturer specified for production.

Many OEM switching power-supply units contain proprietary circuit designs, custom integrated circuits or other parts that are not readily identifiable. Furthermore, some switching power-supply modules are potted in epoxy and simply cannot be repaired. This is particularly frustrating to a maintenance engineer who knows that a supply can be fixed, but must return it and pay for factory repairs because of inadequate documentation.

Photocopying this series of articles and keeping them along with the equipment manuals would make good sense. Also, attaching a table of test results to each copy of the equipment technical manuals will help when you try to determine what to do with a failed switching power supply.

Incoming inspection

The importance of verifying the operation of equipment before installing it in a broadcast plant cannot be overstated. Even though it is often tedious, there is no better way to train yourself on how to use and repair equipment than to go through the gear carefully while it is new and operating properly. Furthermore, station management should insist that all new equipment be verified for proper operation immediately upon receipt.

Begin the tests by inspecting the power supply. This portion is often neglected because engineers assume they know how a power supply works. But power-

supply technology is on the move, just like video editing, automation systems, cameras and everything else. You might be surprised to find yourself behind the times in power-supply design.

Get out your oscilloscope and DVM. Power up the supply and take readings of waveforms and voltages at all available test points. Set up the equipment to operate as it will be used when installed.

Troubleshooting a supply

Problems may eventually occur with any design of switching power supply and the best way to prepare for trouble is to understand how the circuit works and to stock the necessary spare parts. It is unrealistic to have a replacement part for every component in a power supply. You might just as well buy another supply to put on the shelf. However, by analyzing what parts may be prone to failure, a logical decision on what spare parts to stock can be made.

Begin by looking at the primary power-handling devices including:

- ac rectifier diodes.
- power transistors.
- switching-supply filter capacitor(s).
- control-system integrated circuit(s).
- switching-supply inductor.

Power semiconductor devices generally fail in either an open or short circuit. They are usually easy to spot during troubleshooting of the system. The transistors are chosen for fast turn-on, high-voltage breakdown characteristics and current switching capability.

Diodes used for the switching sections of a switching power supply are chosen for their capability to handle large forward currents and for fast-switching speeds from full-forward conduction to cutoff. Neither high-current capacity nor reverse recovery speed can be measured with a DVM diode checker.

The best preparation for troubleshooting is to order a stock of direct replacement power transistors and diodes. Be cautious when using general-purpose replacement semiconductors in a switching supply.

Kaufhold is an independent consultant located in Tempe, AZ.

**ON THE HEELS OF THE
CURRENT BUDGET CRUNCH,
JVC VALUE HELPS POLISH
YOUR IMAGE WITHOUT
SELLING YOUR SOLE.**



JVC[®]

**ALWAYS A STEP AHEAD...
TO KEEP YOU A STEP AHEAD.**

Circle (12) on Reply Card

www.americanradiohistory.com

Managing upward

By Brad Dick, radio technical editor

Many people dream of moving up the corporate ladder or moving into another career field. They often seek higher positions for both money and prestige. Others simply want to make a lateral move into another field. The important element here is not whether the move is up or over, but whether the move is part of an overall plan.

Fill in the following blank. I want to be _____ (name a position you would like to have). Now that you've identified the position you really want, what are you going to do about it?

Career planning

If you want to be successful in your career, it is important to know where you're going. Thirty years ago, people expected to remain in the same job for a lifetime. By the age of 30 or so, people were expected to have selected a job they liked (or could tolerate) and remain in that position or field until retirement. Today, much more career movement is tolerated and even expected.

Work toward the goal

After you've set your goal, it's important to begin working toward it. Step one is to give more than 100% effort. No one is going to promote a person who is not working to capacity. If you want a promotion, get noticed by working hard.

Step two is to train your successor. A mistake often made by supervisors (and others) is to assume that they are the only ones capable of doing their job. Consequently, they don't train anyone else to fill in. Then when it comes time for promotions, they are often overlooked. These supervisors have figuratively "dug themselves into a hole."

You can avoid such a problem by finding someone qualified to take your place. Don't view this person as a threat, but rather as an important element in your plan to get promoted. A willing successor also can help reduce your workload, thus freeing you to complete those special tasks, which may get you noticed.

Move over

Although promotions usually involve upward mobility, every career move



need not be up the corporate ladder. In some instances, it may be more advantageous to move laterally. Let's examine a couple of instances where this might be true.

If your boss is firmly entrenched in the position, and has no desire to move, it's probably better for you to attempt a lateral move. Attempting to take your supervisor's job is risky at best. The drawbacks of losing such a quest are obvious.

In such a case, it's generally best to move around your supervisor by transferring to another department. Although this may seem like a lot of trouble, this tactic has an important advantage. A lateral move often allows you to acquire new skills, which may be needed later. For instance, if you want to be director of engineering at a TV station, you will need more than maintenance skills to be successful. Ask yourself what duties at the station would develop or emphasize your managerial skills.

A lateral move also can shift you into a different market. A person's range of experience is sometimes as important as depth of experience. For instance, someone who has held a variety of positions or worked in various environments may have an advantage over someone who has held the same job in the same company for many years.

Socialize

Socializing with various company groups cannot be overemphasized. This doesn't mean that you have to be the life of a party. It means that you need to meet the people who are important to your future. Group sports activities are excellent ways to make friends outside your normal working area.

If possible, also contact them on company time. Learn how they do their jobs, the language they use and their terms and issues. You need to be able to discuss and identify the key elements if you want to move into another area.

Asking for the promotion

Some of the same concerns we discussed when asking for a raise also apply to asking for a promotion. Be sure you

have a current resume and that your supervisor is fully informed about your previous work.

Make your request at the appropriate time. Your company should be in good financial condition and you should have trained your successor. Choose a time when your boss is likely to be in a good mood and has time to discuss your request. If your supervisor is dealing with other important issues, wait for a better time. Review our discussions on identifying your boss's characteristics. (See July's column.) Use that knowledge to your advantage.

Present your case for a promotion much the same as you would when asking for a raise. Don't demand an immediate response, but let your supervisor give the proposition careful consideration.

Success

After you receive that well-deserved promotion, don't relax on the job. A number of people may have been involved in granting you that job and they may be looking closely at how you perform in the new position. Redouble your efforts and show that you appreciate the opportunity to advance and are willing to give that extra effort.

Nex: time you begin to feel trapped in your position, look around. There may be some exciting new opportunities in your own back yard. Even if your chances for advancement are limited within your company, the steps you take to get noticed can be applied outside to other organizations.

NEW FROM ARRAKIS SYSTEMS

5000 SERIES

**The First No-Compromise
Modular Radio Console...**



...At A Down-To-Earth Price: 16 Channels, Under \$10,000.

THE FEATURES YOU WANT —

- 16 Modular Stereo Channels.
- Program, Audition and Mono Mixdown Balanced Outputs.
- Telephone Mix-Minus Buss.
- Full Monitoring Facilities.
- Remote Equipment Start/Stop.
- Remote Module Control.
- Standard Digital Clock and Timer.
- Optional EQ and Effects Modules.

THE DEPENDABILITY YOU NEED —

- DC Controlled — No Audio On Pots.
- Rugged Modular Construction.
- Penny & Giles Slide Faders.
- ITT Shadow Switches.
- NE5532 IC Module Design.
- External Regulated Power Supply.
- Superb Audio Performance Specs.
- Most Important, Arrakis Systems Designed-in Ultra Reliability!

For features, performance, price and reliability,


NOBODY BUILDS CONSOLES LIKE ARRAKIS.

Call (303) 224-2248

Circle (13) on Reply Card

ARRAKIS SYSTEMS INC. 2609 RIVERBEND COURT FORT COLLINS, CO 80525



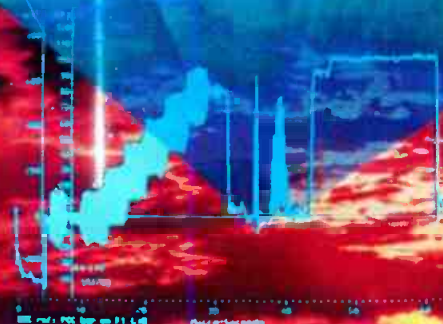

Video Measurements

Channel A OFF-AIR

				Violated Limits	
				Lower	Upper
Bar Amplitude	96.7	IRE			
Chroma-Lum Delay	-54	ns	**	-50	50
Chroma-Lum Gain	76.4	%	**	60.0	120.0
2T Pulse K-Factor	11.2	% Kf			
Pulse/Bar Ratio	89.6	%	**	94.0	106.0

4th annual station maintenance special

When a problem occurs, the maintenance engineer is in the hot seat.

Everyone at a broadcast station accepts the fact that, from time to time, equipment will fail. No piece of equipment is perfect, and no operator is perfect. Problems will occur because of routine component wear, operator error or outside forces such as lightning or other forms of severe weather. We all accept that these things are possible. But, when the inevitable comes, everybody's view of the situation changes.

Whether failures at a broadcast plant are minor or catastrophic, they evoke strong emotions from most of the people connected with the on-air product. Radio and TV broadcasting is an equipment-based profession. The end-product of any station is vulnerable to dozens of potential failure points that can delay a program, ruin an afternoon's work or lose a historic event that cannot be recreated.

Such is broadcasting, and such are the reasons behind our obsession with equipment reliability. Yes,

equipment can break, but it must not break.

Enter the maintenance department. The job of a maintenance engineer at a broadcast station can be compared to that of an airline pilot. The pilot's job has been described as "hours of boredom punctuated by moments of sheer terror." For engineers, the boredom is the routine maintenance of cleaning equipment, making measurements, checking possible failure points, filling out reports and processing other paperwork. The terror occurs when something breaks.


Even the most rational and patient producer, director or engineering VP can be transformed instantly into a wild-eyed bundle of nerves when confronted with an equipment failure. By the time the maintenance engineer gets to the scene, the job ahead involves both an electronic and human element.

This month, in our 4th annual Station Maintenance Special Report, we

examine vital areas of equipment reliability and maintainability. Our report includes the following articles:

- "Controlling ac Line Disturbances" page 26
- "The Commission is Watching" 87
- "Using Digital Oscilloscopes" . . 94
- "Testing Stereo Audio for Mono Compatibility" . . . 106

The key to preventing problems is to understand what can cause a system to fail. The key to troubleshooting a problem after it has occurred is to know your test equipment. We examine both of these important topics this month.



Jerry Whitaker,
editorial director



1

Controlling ac line disturbances

Transient overvoltages represent the greatest single threat to equipment reliability.

Transient disturbances are what headaches are made of. Whatever you call them—spikes, surges or power bumps—they can take you off the air and leave you with a complicated and expensive repair job.

During my years as a chief engineer, I held my breath every time a lightning storm rolled into town. Every time the lights flickered at the studio, I froze. Sound familiar?

Ensuring that the equipment at your station receives clean ac power has always been important. But now, with microcomputers being integrated into a wide variety of broadcast products, the question of ac power quality is more critical than ever. The high-speed logic systems prevalent today can garble or

lose data because of power-supply disturbances or interruptions, causing problems to show up on air or even causing your transmitter to crash. And if the on-air problems aren't enough, there's the usually difficult task of equipment troubleshooting and repair that follows a utility-system power fault.

Protection against transient disturbances is a science that demands attention to detail. This work is not inexpensive. It is not something that you can do overnight. You will, however, wind up paying for transient protection one way or another, either *before* you have problems or *after* you have problems. In the world of transient protection, there is truly no such thing as a free lunch.

Lightning provides the most dramatic demonstration of the damage potential of over-voltage disturbances at a broadcast plant. Equally damaging transients can, however, be generated by utility-company switching or distribution-system faults. (Photo courtesy of Visual Horizons/FPG.)



Piecing it together

You know better than anyone how much it really takes to produce one quality video signal. And when it comes to planning your move to Component Analog Video, you understand the importance of having all the right pieces in all the right places.

MAGNI knows that big needs don't always go along with big budgets, the kind that allow you to duplicate every piece of composite-standard equipment you own. That's why our 1515 Signal Generator and 500 Series Waveform Monitors and Vectorscopes are designed to do double duty. 500 Series units offer up to six inputs — two full sets of component channels, six composite channels, or any combination you need. The MAGNI 1515 gives you CAV signals in Betacam™, M-II™, Industrial M-II™,

S-VHS or SMPTE formats, plus GBR signals, plus composite NTSC signals.

Isn't there room in your CAV blueprints for equipment that can do the job now, as well as tomorrow? Discover MAGNI. And save yourself a little time at the drawing board.

MAGNI

MAGNI SYSTEMS, INC.
9500 SW Gemini Drive
Beaverton, OR 97005 USA
(503) 626-8400
(800) 237-5964
FAX (503) 626-6225
TLX 650-2769743MCI

Betacam is a trademark of Sony Corporation. M-II is a trademark of Matsushita Industrial Electric Ltd.

Circle (210) on Reply Card

www.americanradiohistory.com



"Hello, Sony? Merry Christmas. We need help."

(201) 833-9533.

This line is *always* open.

It connects you with Sony Broadcast National Emergency Technical Assistance. A computerized paging network linked to Sony field engineers across the continental U.S..

One call assures that a qualified Sony engineer will get back to you in minutes.

Not hours, not days.

Minutes.

It's only one of the extensive technical support services that come with every Sony Broadcast product. Services that include regional and dedicated technical assistance lines, 24-hour emergency parts service, and the most complete, centralized parts inventory in the industry—everything from systems modules to the humblest faceplate screw.

Round-the-clock technical support. One reason why Sony Broadcast has such a high percentage of repeat customers.

They know that the Sony Standard works.

Nights, weekends and holidays, too. **SONY**

Broadcast Products



Sony Broadcast Products Company, 1600 Cluett Avenue, Edison, New Jersey 07656
© 1987 Sony Corporation of America. Sony is a registered trademark of Sony Corporation.

Circle (16) on Reply Card

www.americanradiohistory.com



The scope of the problem

Transient protection is a good news, bad news situation. First, the bad news.


Every electronic installation requires a steady supply of clean power in order to function properly. The ac power line into a broadcast plant is, in fact, its lifeblood. It is also, however, a frequent source of equipment malfunctions and component failures. The first step in solving the problem is to find out how bad it is.

Assessing the threat

The utility company feed into a broadcast plant contains not only the 60Hz power needed to run the facility, but also a variety of voltage abnormalities. These disturbances cause different types of problems for different types of equipment.


Figure 1 shows the four major classifications of short-term, ac-voltage disturbances. The generally accepted definitions for these disturbances are:

- *Voltage surge*—An increase of 10% to 35% above the normal line voltage for a period of 16ms to 30s.
- *Voltage sag*—A decrease of 10% to 35% below the normal line voltage for a period of 16ms to 30s.
- *Transient disturbance*—A voltage pulse of high energy and short duration impressed upon the ac waveform. The overvoltage pulse may be one to 100

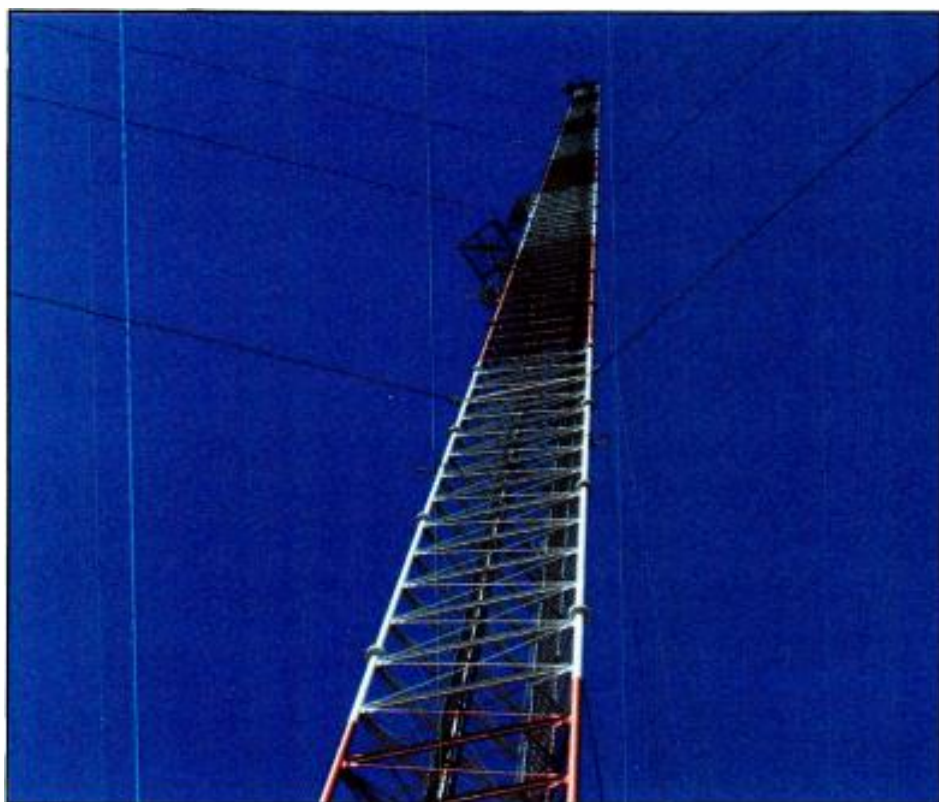

Broadcast towers make excellent lightning rods. Only through proper grounding and surge suppression can you protect sensitive equipment from damage.

Richardson Electronics, Ltd. **We're Plumbicon® People**

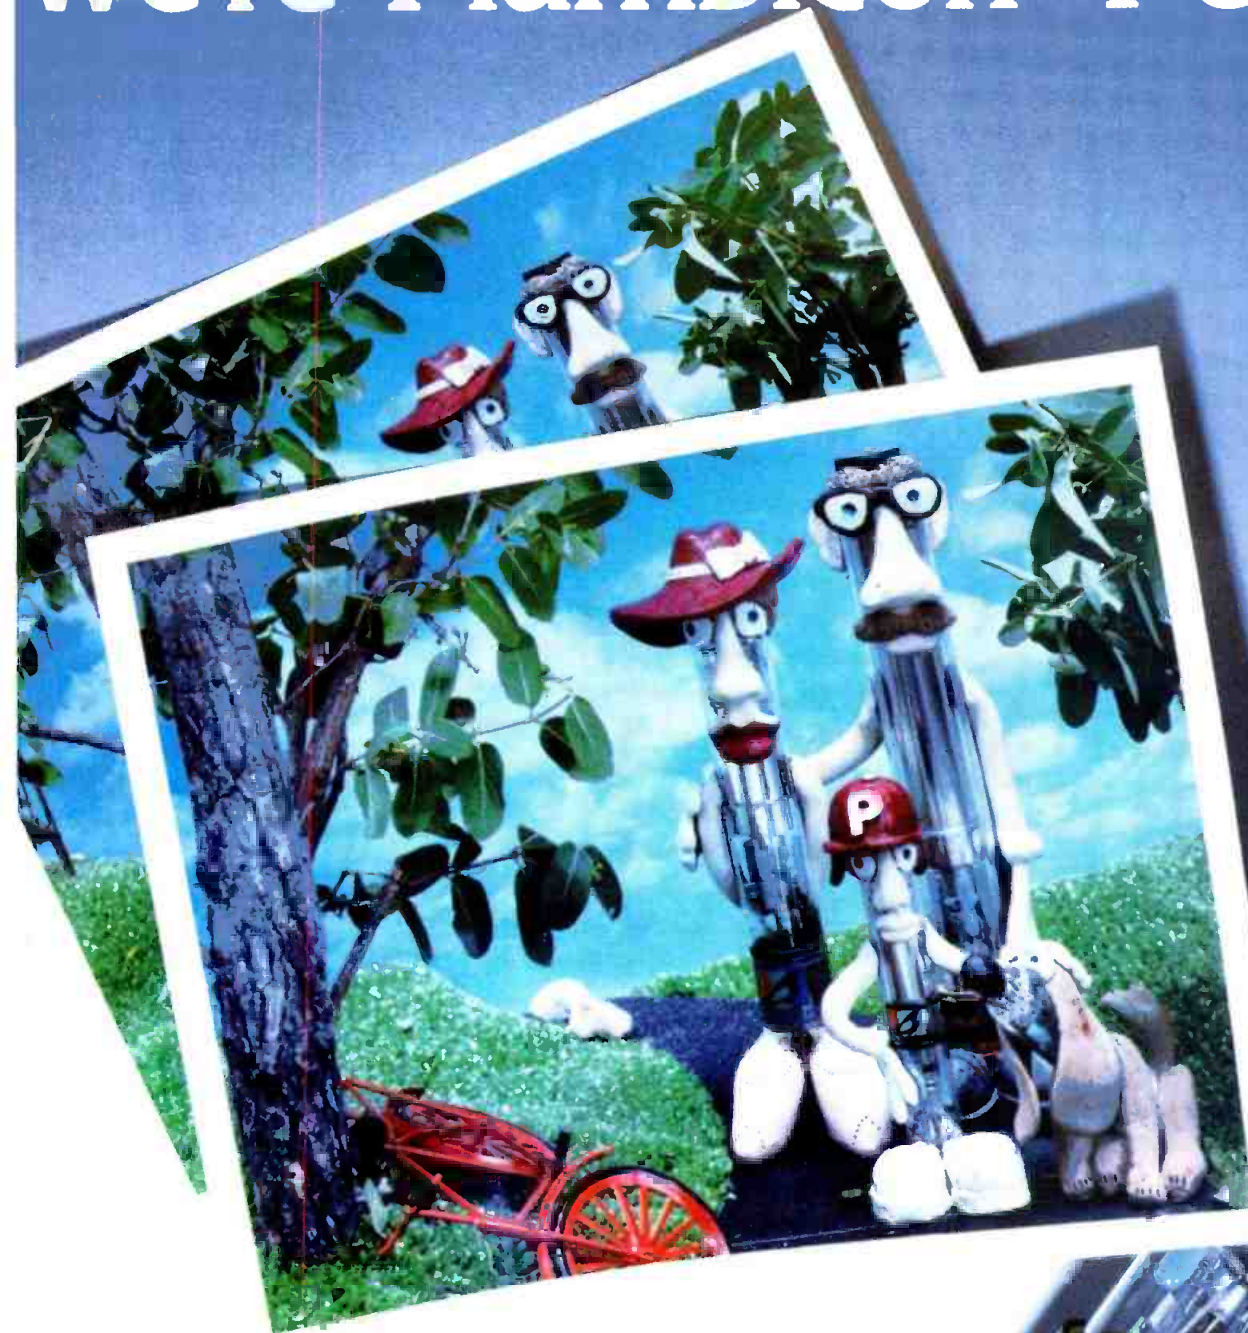

See us at SBE National
Convention, booths 401, 402

When you think of the Plumbicon tube, think of us — Richardson Electronics. Be part of the happy family where same day shipments, great prices and technical factory backups are a part of everyday service. We stock replacements for all cameras, wherever they are made; and all warranty replacements are handled quickly and efficiently.

**Master stocking distributor for the Plumbicon tube,
Richardson Electronics — We're Plumbicon People.**

■ Richardson Electronics, Ltd. □ 40W267 Keslinger Rd. □ LaFox, IL □ 60147 □ (800) 323-1770 □ (312) 232-6400 □ Fax: (312) 232-1071 □ Telex: 283461 ■ Broadcast Division □ Brooklyn, NY □ (800) 221-0860 □ (718) 646-6300 ■ Eastern: (800) 645-2322, (800) 221-0860 ■ Southeastern: (800) 348-5580 ■ Northeastern: (617) 871-5162 ■ Central: (800) 323-1770 ■ Western: (800) 348-5580 ■

Circle (17) on Reply Card
www.americanradiohistory.com

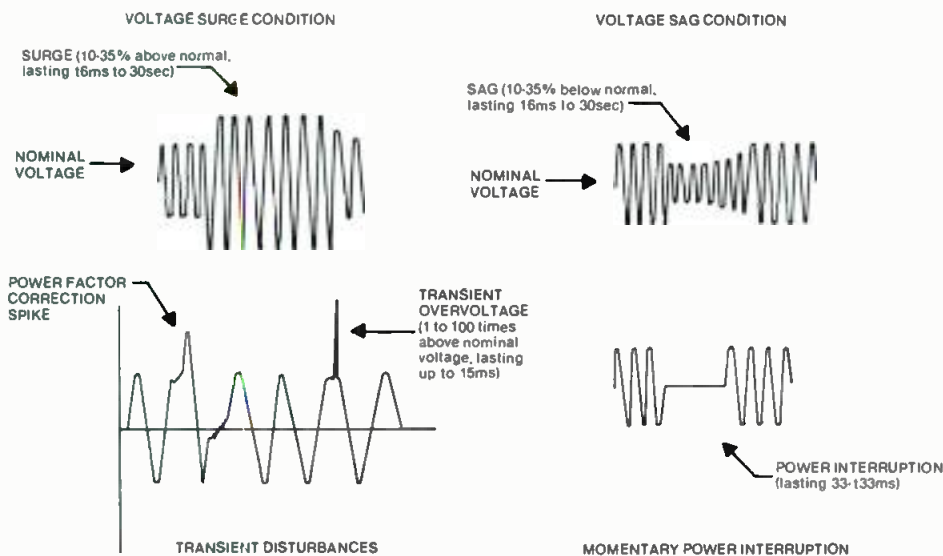


Figure 1. The four basic classifications of short-term power-line disturbances.

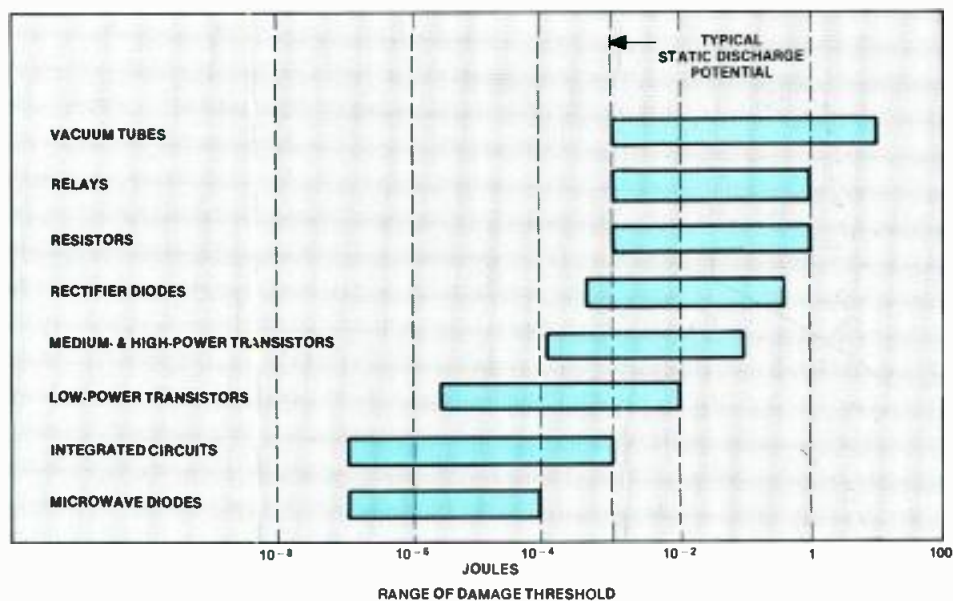


Figure 2. An estimation of the susceptibility of common electrical devices to damage from transient disturbances. The vertical line marked "static discharge" represents the energy level of a discharge that typically can be generated by touching a piece of equipment after walking across a carpeted floor. (Reference 1.)

DEFINITION	TYPE 1 Transient and oscillatory overvoltage	TYPE 2 Momentary undervoltage or overvoltage	TYPE 3 Power outage
CAUSES	Lightning, power network switching, operation of other loads	Power system faults, large load changes, utility company equipment malfunctions	Power system faults, unacceptable load changes, utility equipment malfunctions
THRESHOLD*	200 to 400% of rated RMS voltage or higher (peak instantaneous above or below rated RMS)	Below 80-85% and above 110% of rated RMS voltage	Below 80-85% of rated RMS voltage
DURATION	Spikes 0.5 to 200µs wide and oscillatory up to 16.7ms at frequencies of 200Hz-5kHz and higher	From 4 to 60 cycles depending on type of power system distribution equipment	From 2 to 60 seconds if correction is automatic; from 15 minutes to 4 hours if manual

*The approximate limits beyond which the disturbance is considered to be harmful to the load equipment.

Table 1. The types of voltage disturbances identified in the Key report.

times the normal ac potential and may last up to 15ms. Rise times can measure as short as 1ns.

- **Momentary power interruption**—A decrease to zero voltage of the ac power-line potential, lasting from 33ms to 133ms. (Longer-duration interruptions are considered power outages.)

Voltage surges and sags occasionally result in operational problems for equipment on-line, but automatic protection or correction circuits generally take appropriate actions to ensure that there is no equipment damage. Such disturbances can, however, garble computer system data if the disturbance *transition time* (the rise or fall time of the disturbance) is sufficiently fast. System hardware also may be stressed if there is only a marginal power-supply reserve or if the disturbances are frequent.

Momentary power interruptions can cause a loss of volatile memory in computer-driven systems and place severe stress on hardware components, especially if the ac supply is allowed to surge back automatically without *soft-start* provisions. Successful system reset may not be accomplished if the interruption is sufficiently brief.

Although voltage sags, surges and momentary interruptions can cause operational problems for equipment used today, the possibility of complete system failure because of one of these mechanisms is relatively small. The greatest threat to the proper operation of broadcast equipment rests with transient overvoltage disturbances on the ac line.

Transients are difficult to identify and difficult to eliminate. Many devices commonly used to correct sag and surge conditions, such as ferroresonant transformers or motor-driven autotransformers, are of limited value in protecting a load from high-energy, fast rise-time disturbances on the ac line. If not attenuated, these brief pulses, which sometimes last only a few microseconds, can destroy semiconductors, disturb logic operations or latch up microcomputer routines.

In the computer industry, the majority of unexplained problems resulting in disallowed states of operation actually are caused by transient disturbances on the utility feed. With the increased use of microcomputers in broadcasting, this warning cannot be ignored. The threat to broadcast facilities is compounded because microcomputers are being used at critical stages in the transmission chain, including program-automation equipment and transmitter-control systems.

Because of the high potential that transient disturbances typically exhibit, they not only cause data and program errors but also can damage or destroy electrical components. This threat involves sensi-



OVER 5 DECADES OF



EXCELLENCE



EIMAC 1934-1987

Supporting Broadcasting for over 50 years

Decades of quality and dependability from Varian EIMAC.

EIMAC's tradition of high quality and dependability was firmly established in 1934 and continues on in 1987. Stringent manufacturing standards and controls, plus EIMAC's exclusive, long-term warranty reduces transmitter downtime and eliminates excessive operating overhead.

EIMAC backs its quality products with the industry's most comprehensive warranty program:

Warranty time for each EIMAC tube type is specified in writing and runs from the industry standard of 1,000 hours or 12 months to as high as 10,000 hours and 24 months.

Specific warranties for some popular tube types are:

4CX5000A 10,000 hours/24 months
4CX10,000D 10,000 hours/24 months

4CX15,000A 10,000 hours/24 months
4CX35,000C 10,000 hours/24 months
3CX2500A3 5,000 hours/12 months
4CX1500A 5,000 hours/12 months
5CX3000A 5,000 hours/12 months

Fourteen other EIMAC types have these extended use-time warranties. Specific warranties for each tube type are available from the Varian EIMAC worldwide sales organizations.

In all cases, EIMAC tubes are 100% warranted to be free of manufacturing defects. And, don't forget, EIMAC has a "carcass credit" return program for real savings on replacement tubes.

Compare EIMAC's long record of outstanding performance. We guarantee EIMAC products will be here tomorrow for today's applications.

More information is available on EIMAC tubes and warranty program from Varian EIMAC, or any Electron Device Group worldwide sales organization. See your distributor or contact Varian EIMAC today.

Varian EIMAC
301 Industrial Way
San Carlos, California 94070
Telephone: 415-592-1221

Varian EIMAC
1678 S. Pioneer Road
Salt Lake City, Utah 84104
Telephone: 801-972-5000



Type of disturbance	UPS system and standby generator	UPS system	Secondary spot network ¹	Secondary selective network ²	Motor-generator	Shielded isolation XFMR	Suppressors, filters, lightning arresters	Solid-state line-voltage regulator
1	All source transients	All source transients	None	None	All source transients	Most source transients	Most transients	Most source transients
	No load transients	No load transients			No load transients	No load transients		No load transients
2	All	All	None	Most	Most	None	None	Some depending on response time of system
3	All	All outages shorter than battery supply discharge time	Most	Most	Only brown-outs	None	None	Only brown-outs

NOTES:
1. Dual power feeder network.
2. A dual power feeder network using a solid-state switch to select which line is fed to the load.

Table 2. The types of systemwide protection equipment available to broadcasters and the ac line abnormalities that each approach is capable of handling.

tive integrated circuits and many other common devices, such as capacitors, transformers, rectifiers and power semiconductors. Figure 2 illustrates the vulnerability of common components to high-energy pulses. What's more, the effects of transient disturbances on electronic devices are often cumulative, resulting in gradual deterioration and, ultimately, catastrophic failure.

Protection alternatives

Most utility companies make a good-faith attempt to deliver clean, well-regulated power to their customers. Most disturbances on the ac line are beyond the control of the utility company. Large load changes imposed by customers on a random basis, power-factor correction switching, lightning and accident-related system faults all combine to produce an

environment in which tight control over ac power quality is, at best, difficult to maintain. Therefore, the responsibility for ensuring ac power quality must rest with the user of the sensitive equipment.


The selection of a protection method for a given facility is as much an economic question as it is a technical one. A wide range of power-line conditioning and isolation equipment is available. A logical decision about how to proceed can be made only with accurate, documented data on the types of disturbances typically found on the ac power service to that facility. This data can be gained from a power-quality survey, available from a number of consulting firms and power-conditioning companies. The typical procedure involves installing a sophisticated voltage-monitoring unit at the site for several weeks. During that time, data is collected on the types of disturbances the load equipment is likely to experience.

The type of monitoring unit used is of critical importance. It must be a high-speed system that stores disturbance data in memory and delivers a print-out of the data on demand. Slow-speed chart recorders, used by many utility companies, are too slow and lack sufficient sensitivity to accurately show short-duration



The choice of the professionals...



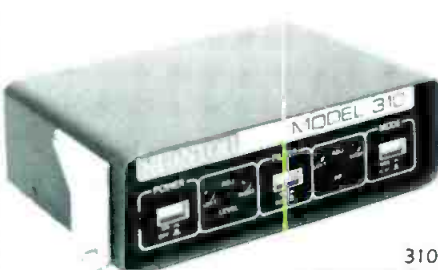

**310B
PROFESSIONAL
PHONO PREAMPLIFIER/EQUALIZER**

... Interfaces magnetic phono cartridges for optimum calibration of audio systems. Available with balanced or unbalanced output.



PBR ANNOUNCER'S EARPHONE ...
Ideal for on camera studio work and remote coverage.

The
**Dynaphase
30M/SR** is a shoulder rest single cup headphone that provides the ultimate in convenience, comfort and superb sound quality. Made to rest on either your left or right shoulder, or shoulder rest can be detached and used as a single cup hand-held monitor.



680EL ... Delivers sound excellence and stands up to backcueing, vibrations and mishandling.

Stanton is the company with a total commitment to quality and reliability—producing products for the Recording Industry, the Broadcast Industry and the Professionals in Audio.



STANTON

THE CHOICE OF THE PROFESSIONALS™

200 Terminal Dr., Plainview, NY 11803



500AL ... For heavy duty on-the-air use with wide tracking force range.

Circle (19) on Reply Card

Video Graphic Courtesy of:
Abel Image Research/Cinecommunications,
Malaysia/KHK/Needham, Malaysia



NOW, A 1-INCH VIDEO TAPE THAT LOOKS GREAT TO EDITORS. AND ENGINEERS.

Introducing 1-inch EASTMAN Professional Video Tape, EVT-2000 (Broadcast Quality). With the durability to satisfy the toughest editor, and the signal characteristics to brighten the eyes of the most demanding engineer.

The latest advances in binder technology have produced a highly durable video tape that runs smoothly and withstands the ravages of heavy editing and still-framing without increasing headwear.

New EASTMAN Professional Video Tape, EVT-2000, is formulated to deliver clean, crisp, brilliant pictures and excellent audio performance. Chrominance and luminance are superior. Dropouts are minimal.

EVT-2000 is recommended for production, post production, and heavy editing, while our economical EVT-1000 video tape is suggested for duplicating and syndication.

EASTMAN Professional Video Tape, EVT-2000, is available in

C-format lengths from 34 to 188 minutes and B-format lengths from 34 to 126 minutes.

For details, write to Eastman Kodak Company, Dept A3067, 343 State Street, Rochester, NY 14650. Or call toll free 1 800 44KODAK (1 800 445-6325), Ext 864.



EASTMAN KODAK COMPANY
Motion Picture and
Audiovisual Products
Division.

Eastman

EVT-2000

PROFESSIONAL VIDEO TAPE (BROADCAST QUALITY)

© Eastman Kodak Company, 1986

Circle (20) on Reply Card

Basis of comparison ¹	UPS system and standby generator	UPS system	Dual power feeders	Motor-generator	Shielded isolation XFM ²	Suppressors, filters, lightning arresters	Solid-state line-voltage regulator
Installation and equipment costs	\$1500 to \$2000 per kVA	\$1100 to \$1500 per kVA	Installation cost will vary greatly depending on site	\$250 to \$400 per kVA	\$50 to \$150 per kVA	\$1 to \$10 per kVA	\$250 to \$280 per kVA
Maintenance costs	\$2000 to \$4000 per year	\$1100 to \$3000 per year	None	Less than \$1000 per year	None	None	Less than \$1000 per year
Operating efficiency ²	80-85%	80-85%	100%	80-90%	Up to 98%	100%	90-98%

NOTES:
¹ A power conditioning system rated for approximately 25kVA is assumed.
² Efficiency applies to the ac power conditioning equipment only. Losses in environment support systems are not taken into account.

Table 3. The approximate cost of systemwide protection equipment installation and operation. Equipment prices can vary considerably depending on the hardware chosen.

voltage disturbances. Chart recorders can confirm the presence of long-term surge and sag conditions (of 10s or more), but provide almost no useful data on transients.

The protection equipment chosen must be matched to the problems that exist on the line. Using inexpensive basic protectors may not be much better than operating directly from the ac line. Conversely, the use of a sophisticated protector designed to shield the plant from every conceivable power disturbance may not

be economically justifiable.

Purchasing the transient-suppression equipment is only one element in the selection equation. Consider the costs associated with site preparation, installation and maintenance. Also consider the operating efficiency of the system. Protection units that are placed in series with the load consume a certain amount of power and, therefore, generate heat. These items may not be significant, but they should be taken into account. Prepare a complete life-cycle cost analysis of

the protection methods proposed. The study may reveal that the long-term operating expense of one system outweighs the lower purchase price of another.

Dollars and sense

The amount of money a broadcaster is willing to spend on protection from utility-company disturbances generally depends on the engineering budget and how much the station has to lose. Spending \$25,000 on systemwide protection for a major-market station, where spot rates can run into the hundreds or thousands of dollars, is easily justified. At small- or medium-market stations, justification is not so easy.

Electronic equipment's susceptibility to failure because of disturbances on the ac power line has been studied by many organizations. The bench mark study to date was conducted by the Naval Facilities Engineering Command (Washington, DC). The far-reaching program, directed from 1968 to 1978 by Lt. Thomas Key, identified three distinct categories of recurring disturbances on utility-company power systems. As shown in Table 1, it is not the magnitude of the voltage, but the duration of the disturbance, that determines the classification.

The Industry Constant

"Over the past 40 years, transmitter manufacturers have come and gone. Continental Electronics takes pride in its staying power and commitment to the broadcast industry. In good times or in bad, dedication to our customers has not and will not waiver. You can rely on our products and service . . . they're a constant at Continental."



Tom Yingst, President



Continental Electronics



a Division of Varian Associates, Inc. PO Box 270879 Dallas, Texas 75227 Ph: (214) 381-7161 Telex: 73-398 varian

Consistency

Delivering beautiful pictures is only half of what you need from your video tape. The other half is doing it consistently, time after time. That's why Ampex 196 stands alone.

The reason is Ampex Process Management. APM is an innovative manufacturing concept, using advanced proprietary tools to enable us to control the consistency of the entire production process. From raw materials to finished products. No other video tape delivers such consistent performance, reel after reel.

APM combines a management commitment with statistical process control techniques to monitor every step in the manufacturing process. As a result, Ampex is able to produce a video tape of unmatched consistency. Which means you get the cleanest, sharpest pictures production after production.

If you'd like to know more about how APM contributes to the consistency of Ampex 196, call or write today for a free brochure. Ampex Corporation, Magnetic Tape Division, 401 Broadway, Redwood City, CA 94063. 415-367-3809.

AMPEX

Circle (22) on Reply Card



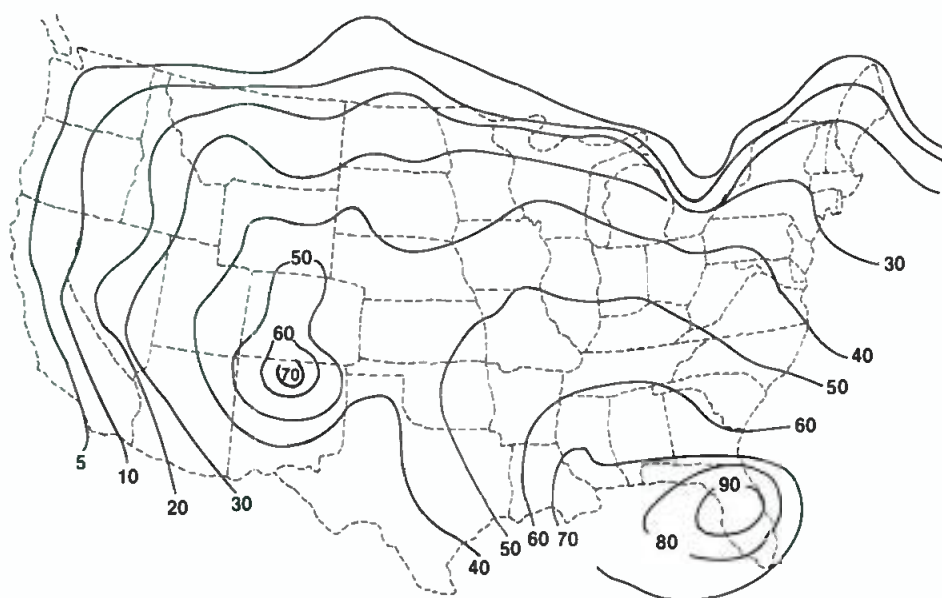


Figure 3. The Isokeraunic map of the United States, showing the approximate number of lightning days per year.

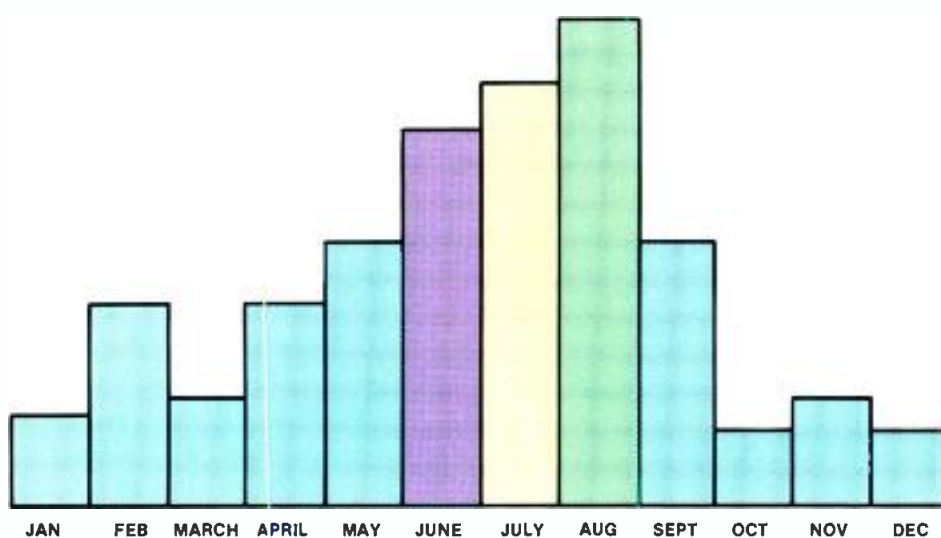


Figure 4. The relative frequency of power problems in the United States, classified by month. (Reference 1.)

In the study, Key found that most equipment (in this case, computer) failure caused by ac line disturbances occurred during bad weather. According to a report on the findings, the incidence of thunderstorms in an area may help to predict failures.

The type of power-transmission system used by the utility company also affects the number of disturbances observed on power-company lines. For example, an analysis of utility-system problems in Washington, DC, Norfolk, VA, and Charleston, SC, showed that underground power-distribution systems experienced one-third fewer failures than

overhead lines in the same areas.

Tables 2 and 3 show the options available to station engineers to protect sensitive broadcast equipment from ac line disturbances. Approximate costs for that protection also are listed. Because each installation is unique, conduct a thorough investigation of the station's needs before purchasing equipment.

Assessing the lightning hazard

As identified by Key in his Naval Facilities study, the extent of lightning activity in an area significantly affects the probability of equipment failure caused by transient activity. The threat of a light-

ning strike to a facility is associated with the installation and its location. The geographic location, type and character of the facility, size of the plant and character of the lightning strike all are important factors.

The *Keraunic number* of a geographic location represents the likelihood of lightning activity in that area. Figure 3 shows the *Isokeraunic map* of the United States, which estimates the number of lightning days per year in various areas of the country. On the average, 30 storm days occur per year across the continental United States. This number does not fully describe the lightning threat because many individual lightning strikes occur during a single storm.

The structure of a facility has a significant effect on the lightning threat to equipment operation. Higher structures tend to collect and even trigger lightning strikes. Because storm clouds tend to travel at specific heights above the earth, conductive structures in mountainous areas more readily trigger lightning activity.

The *plant exposure factor* is a function of the size of the facility and the Isokeraunic rating of the area. The larger the physical size of an installation, the more likely it is to be hit by lightning during a storm. The longer a transmission line (ac or RF), the more lightning strikes it is likely to receive.

The character of a lightning strike covers a wide range of voltage, current and rise-time parameters. Making an accurate estimate of the damage potential of a strike is difficult.

A direct hit to a utility power line causes a high-voltage, high-current wave to travel away from the point of the hit in both directions along the power line. The waveshape is sawtooth with a rise time measured in microseconds or nanoseconds. The pulse travels at nearly the speed of light until it encounters a significant change in line impedance. At this point, it is reflected back down the line in the direction from which it came.

This action creates a standing wave containing the combined voltages of the two original pulses. A high-energy wave of this type can reach potential sufficient to arc over to another parallel line, a distance of about eight feet on a local feeder (typically 12kV) power pole. Not surprisingly, such energy can have devastating effects on electronic equipment.

The relative frequency of power problems appears to be seasonal in nature. As shown in Figure 4, most problems are noted during June, July and August. These high problem rates can be traced to increased thunderstorm activity and heavy, unpredictable air-conditioning loads in the summer months. [1:~:))]]

**Wouldn't it be great
if somebody built total
switching/control systems
that were expandable,
fully integrated,
and guaranteed
for ten years?**

**Somebody
does.**



UTAH SCIENTIFIC

We've supplied some of the biggest custom routing, master control, machine control, and station automation systems in the business. All fully integrated—all with Utah's ten-year warranty. Start small and easily expand. Start big and enjoy the confidence of a single source with a history of quality and reliability.

Call today for more information.

UTAH SCIENTIFIC, INC. • 1685 West 2200 South, Salt Lake City, Utah 84119
(801) 973-6840, Toll-Free 1-800-453-8782
DYNATECH Broadcast Group

Circle (23) on Reply Card




Facility-protection methods

Effective transient control requires attention to all elements in the broadcast plant.

Proper grounding of equipment and structures at a broadcast facility is basic to protection against ac line disturbances. This applies whether the source of the disturbance is lightning, power-system switching activity or a fault in the distribution network. Regardless of the protection approach, all protective devices and systems require a solid, low-impedance earth ground to operate properly. Grounding is important at both the studio and the transmitter plant. Probably the greatest challenge to proper grounding is a mountain-top transmitter.

Typical installation

The grounding arrangement for a remotely located grounded-tower (FM or TV) transmitter plant generally follows the guidelines shown in Figure 5. The tower and guy wires are grounded using 10-foot-long, copper-clad ground rods. The antenna is bonded to the tower, and the transmission line is bonded to the tower at the point where it leaves the structure and begins the horizontal run into the transmitter building. Before entering the structure, the line is bonded to

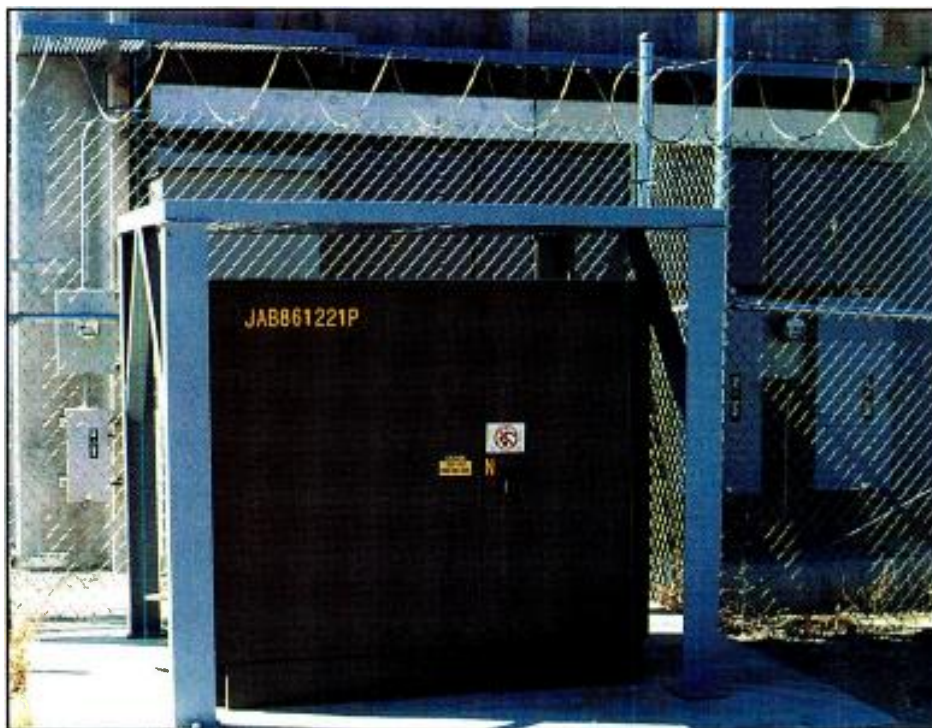

Most of the transient disturbances in a plant will come from the utility-company ac power line. Take precautions to stop these disturbances from entering your facility.

BUILT FOR THE DEMANDS OF PRODUCTION.



In the production business, quality plus speed equals success.

That's why the TASCAM ATR-60 Series is engineered for those who make their living with recorders. All five share a design philosophy stressing function over flash; an overriding concern for performance without complication; a thoughtful integration of features which respond to the needs of the professional.

—On every ATR-60, the deck plate won't flex. Ever. So you won't be compensating for flex-induced phase or wow and flutter in post production.

—The unique Omega Drive puts less stress on your tape, so the cumulative tension of a thousand start/stop passes won't reach your tape.

—Heads designed and man-

ufactured by TASCAM means Sync frequency response equals Repro, so you don't have to rewind and change modes to make critical audio decisions.

—Sync Lock and the most responsive servo control in the business will keep you working instead of waiting for a machine to lock up.

—Time Code Lock keeps code coming from the Sync head, regardless of the audio monitor mode, so your synchronizer won't get confusing double messages when modes are switched.

—Input Enable/Disable allows you to monitor any source without repatching or changing mixer settings, avoiding a common cause of aborts.

—Long cable runs don't bother a TASCAM ATR-60, since +4 dBm, +8 dBm and even +10 dBm levels are available.

There are five ATR-60 recorders: the ATR-60-2T (IEC Standard) Center Track Time Code; ATR-60-2N/2D Quarter-inch Mastering; ATR-60-2HS Half-inch High Speed Mastering; ATR-60-4HS Half-inch 4-Track High Speed Mastering or Multitrack; and the ATR-60-8 Half-inch Production Quality 8-track.

To see, hear and feel them, visit your nearby TASCAM dealer, or call TASCAM for the name of the dealer nearest you.

Production is a demanding business. And the ATR-60's are built to meet the demand.

Pure Performance
TASCAM
TEAC Professional Division

7733 Telegraph Rd. • Montebello, CA 90640
Telephone: (213) 726-0303

The design goal of this arrangement is to strip all incoming lines of damaging overvoltages before they enter the facility. One or more lightning rods are mounted at the top of the tower struc-

The grounding configuration shown in Figure 5, although commonly found at many installations, has built-in problems that can make it impossible to provide adequate transient protection to equipment at the site. Look again at the Figure 5 example. To equipment inside the

The utility ground surely will have a lower inductance to the current surge than will the antenna ground, but the antenna probably will exhibit a lower resistance to ground than the utility side of the circuit. Therefore, the surge current will be divided between the two grounds, placing the transmission equipment *in series* with the surge suppressor and the antenna ground system. A transient of sufficient potential will damage the transmission equipment.

Bulkhead panel

The bulkhead panel size depends on the spacing, number and size of the coaxial lines entering the building through the plate. The panel should be made of copper or brass. Do not use steel, unless it is stainless steel (18-8 type or the equivalent). To provide a weatherproof point for mounting transient-suppression devices, you can modify the bulkhead so that you have a subpanel, as shown in Figure 7. The subpanel, attached so that it protrudes through an opening in the wall, creates a secondary plate on which suppressors are mounted and grounded. To handle the currents that may be experienced during a lightning strike, the

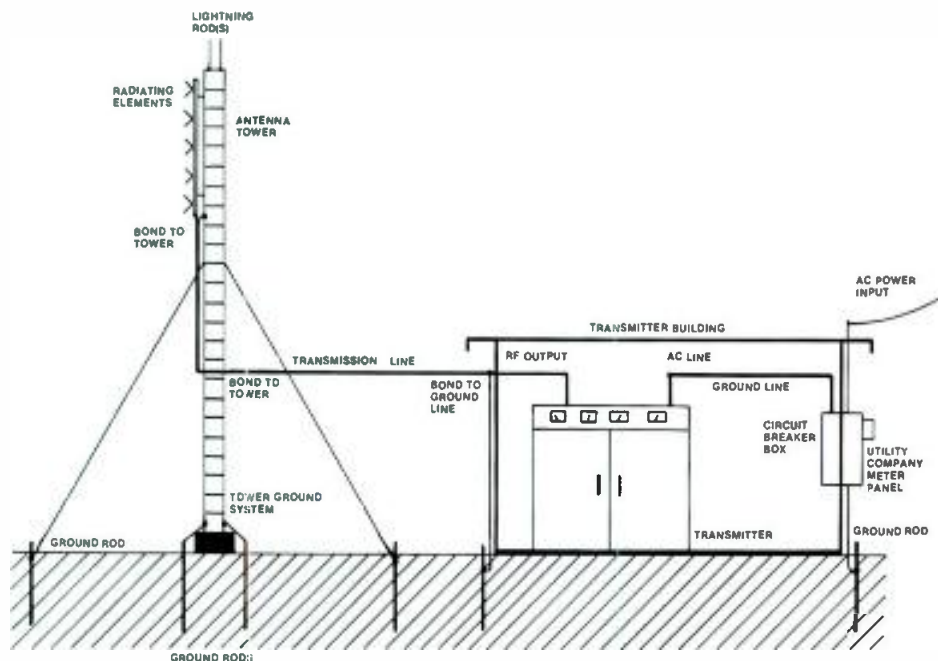


Figure 5. The typical, but not ideal, grounding arrangement for a transmission facility using a grounded tower. A better configuration involves the use of a bulkhead panel through which all cables pass into and out of the equipment building.


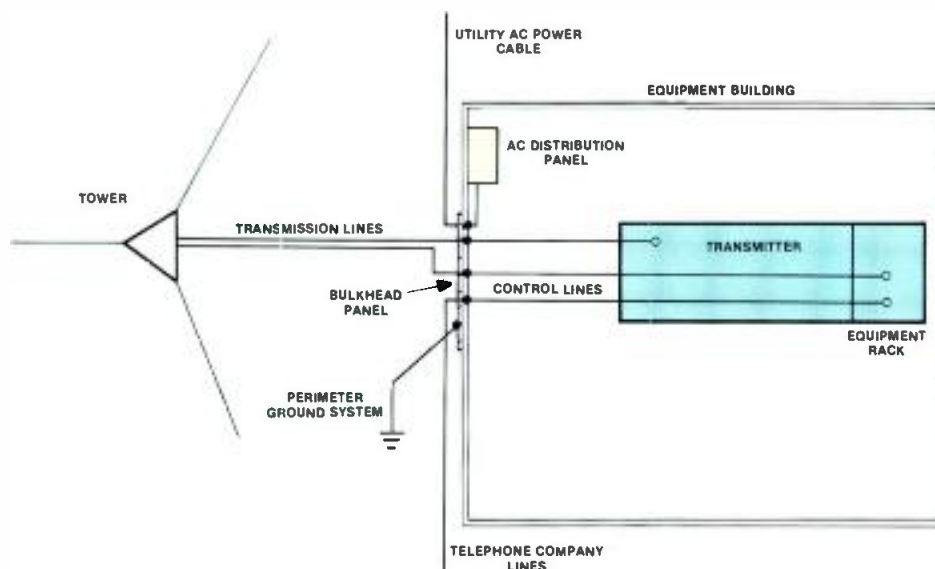


Figure 6. The basic design of a bulkhead panel for a transmission facility. (Reference 2.)

From inspiration, to installation...

With Centro, your next broadcast, teleproduction or post-production facility can capitalize on years of experience. Working with Centro's expert staff, you receive the finest design, engineering, fabrication, and installation services. We can help you carefully plan, budget, schedule and complete your project. With meticulous attention to every detail, Centro can put your new or renovated facility on-line, on time and within budget.



CENTRO
CORPORATION

369 Billy Mitchell Road
Salt Lake City, Utah 84116
(801) 537-7779



© 1987 - Centro Corporation

Circle (25) on Reply Card

www.americanradiohistory.com

bottom-most subpanel flange (which joins the subpanel to the main bulkhead) must have a total surface-contact area of at least 0.75 square inches per transient suppressor.

Because the bulkhead panel will carry significant current during a lightning strike or ac line disturbance, it must be constructed of heavy material. The recommended material is 1/8-inch C110 (solid copper) 1/2 hard. This type of copper stock weighs nearly 5 1/2 pounds per

square foot and sells for about \$2.25 per pound. Installing a bulkhead is an expensive job, but one that will pay dividends for the life of the facility. Use 18-8 stainless-steel mounting hardware to secure the subpanel to the bulkhead.

Because the bulkhead establishes the central grounding point for all equipment in the building, it must be tied to a low-resistance (and low-inductance) perimeter ground system. Ideally, the bulkhead panel will extend down the side of

the building and tie into the perimeter ground below grade level. This will result in the lowest resistance and inductance to earth ground.

Checklist for proper grounding

Follow a logical series of steps to ensure that the needed protection can be achieved at the broadcast plant:

1. Install a bulkhead panel to provide mechanical support, electrical grounding and lightning protection for coaxial cables entering the equipment building.

2. Install an internal ground bus using No. 2 or larger solid-copper wire. (At transmission facilities, use copper strap that is at least three inches wide.) Form a "star" grounding system. At larger installations, form a "star-of-stars" configuration. Do not allow ground loops to exist in the internal ground bus. Connect the following items to the building internal ground bus: chassis racks and cabinets of all equipment and all auxiliary equipment (chargers, switchboards, conduits, metal raceway and cable trays).

3. Install a tower earth-ground array by driving ground rods and laying radials as required to achieve a low earth-ground impedance at the site.

4. Connect outside metal structures to the earth-ground array (towers, metal fences, metal buildings and guy anchor points).


5. Connect the power-line ground to the array. Follow local electrical code.

6. Connect the bulkhead to the ground array through a low-inductance and low-resistance bond.

Do not use soldered-only connections outside the equipment building. Crimped, brazed and *exothermic* (Cald-welded) connections are preferable. For a proper bond, all metal surfaces must be clean, any finish must be removed to bare metal and surface preparation compound must be applied (where necessary). Protect all connections from moisture by appropriate means (sealing compound and heat-sink tubing).

The ac wiring system

Most transient disturbances a facility will experience enter the plant through the utility-company ac power line. Effective transient suppression, therefore, begins with proper installation of the ac power-system wiring. Arrange with the local utility to have a separate transformer feed your facility. This may cost more initially, but it will reduce the chance for transient disturbances from nearby operations to affect your equipment. Do not allow the placement of noisy loads on the broadcast facility power line. Devices such as arc-welders, heavy electrical motors, elevators and other large loads can create an electrical environment that

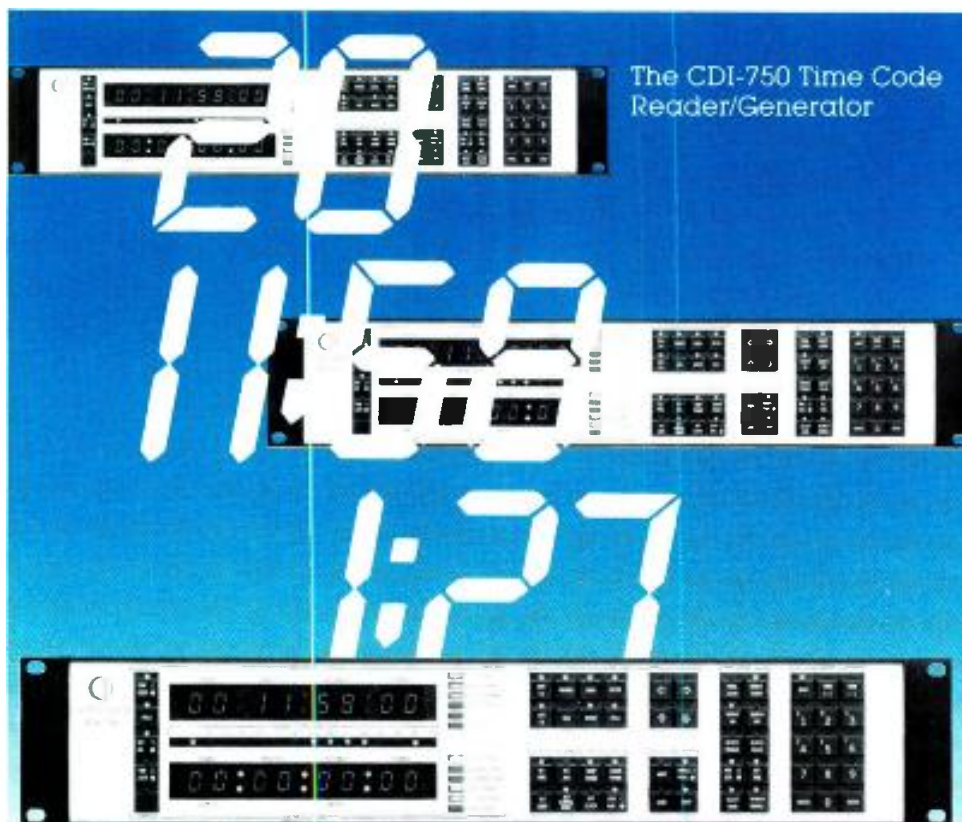

The CDI-750 Time Code Reader/Generator

More
than just
a matter
of time

The CDI-750 is a full function reader, generator, character inserter and programmable 16-event controller all rolled into one. In addition to simultaneously generating and reading time code, this intelligent microprocessor-based instrument offers a programmable jam sync mode, built-in time of day clock, and an RS-232/422 computer interface. And with front panel controls, the CDI-750 is an easy unit to operate, affording the user greater flexibility.

Fully compatible with the Shadow II™ and Softouch,™ this system's state-of-the-art software controls make it readily adaptable to future needs.

Each unit carries a 3 year warranty.

For more details contact Cipher Digital today. Call (800) 331-9066.



cipher digital, inc.

P.O. BOX 170 FREDERICK, MD 21701
(301) 695-0200 TELEX 272065

Timely today, consistent with tomorrow.

Circle (26) on Reply Card

Centro is the key.

Centro Corporation. Worldwide systems integration specialists in building the finest broadcast, teleproduction and post-production facilities. In short, turning ideas and dreams into reality.



369 Billy Mitchell Road
Salt Lake City, Utah 84116
(801) 597-7779

Circle (27) on Reply Card

© 1987 - Centro Corporation

is prone to equipment malfunctions.

It should be noted, however, that because transient disturbances, by definition, are high frequency, they will capacitively couple from the primary to the secondary of a typical utility-company transformer. Simply installing a dedicated transformer that is not equipped with a special Faraday shield (utility transformers generally do not have such shields) will provide little protection from equipment damage. Installation of a dedicated utility-company transformer, however, will permit you to establish your own facility ground system in-

dependent of other users.

Insist that all ac wiring within the broadcast facility be performed by an experienced electrical contractor, and *always fully within the local electrical code*. Figure 8 shows a typical service-entrance panel, with the neutral line from the utility company tied to ground and to the ground rod at the meter panel. Where permitted by the local code, this should be the only point at which neutral is tied to ground in the ac distribution system.

Figure 9 shows a 3-phase power-distribution panel. Note that the neutral and

ground connections are kept separate. Most ac distribution panels give the electrical contractor the ability to lift the neutral from ground by removing a shorting screw in the breaker-panel chassis. Insulate the neutral lines from the cabinet. Bond the ground wires to the cabinet for safety. Always run a separate, insulated green wire for ground. Never rely on conduit or other mechanical structures to provide ac system ground to electrical panels or equipment.

A single-phase power-distribution panel is shown in Figure 10. Note that neutral is insulated from ground and that the insulated green ground wires are bonded to the panel chassis.

Conduit runs often are a source of noise. Corrosion of the steel-to-steel junctions can act as an RF detector. Conduit-feeding sensitive equipment usually will contact other conduit runs powering noisy devices, such as elevators or air-conditioners. Where possible, eliminate this problem by using PVC pipe, Romex or jacketed cable.

However, if you are stuck with metal pipe, send the noise to the power ground rods instead of your equipment by isolating the green ground wire from the conduit with a ground-isolating (orange) receptacle. In a new installation, isolate the conduit from building metal structures or other conduit runs. Consult your local electrical code or an experienced electrical contractor before installing or changing any ac power system wiring.

The installation and wiring of equipment racks also must be carefully planned. Bond adjacent racks together with bolts, and clean the contacting surfaces by sanding down to bare metal. Install an ac receptacle box at each rack. Isolate the conduit from the rack. Isolate the power ground from the receptacle box. (One alternative to the isolated-ground receptacle is the use of an insulated bushing between the conduit and the receptacle box.) Mount a vertical power strip inside the rack to power the equipment. (The power strip doesn't need to be insulated from the rack). Additionally, bond the rack to the bulkhead ground or the green ground wire in the receptacle box.

Mount equipment in the rack using normal metal mounting screws. If your facility is located in a high-RF field, clean the rack rails and equipment-panel connection points to ensure a good electrical bond. Power the equipment from the vertical power strip using standard 3-prong grounding ac plugs. *Do not defeat the safety ground connection*. Equipment manufacturers use this ground to drain transients.

Before implementing any type of ac
Continued on page 52

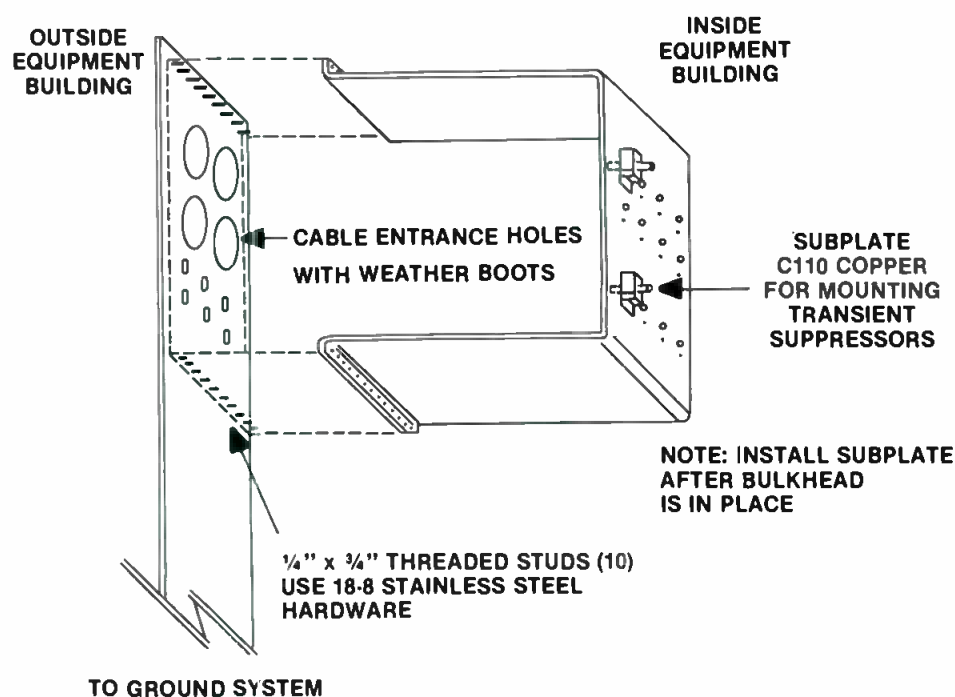


Figure 7. The addition of a subpanel to a bulkhead as a means of providing a mounting surface for transient-suppression components that is not exposed to outside elements. (Reference 2.)

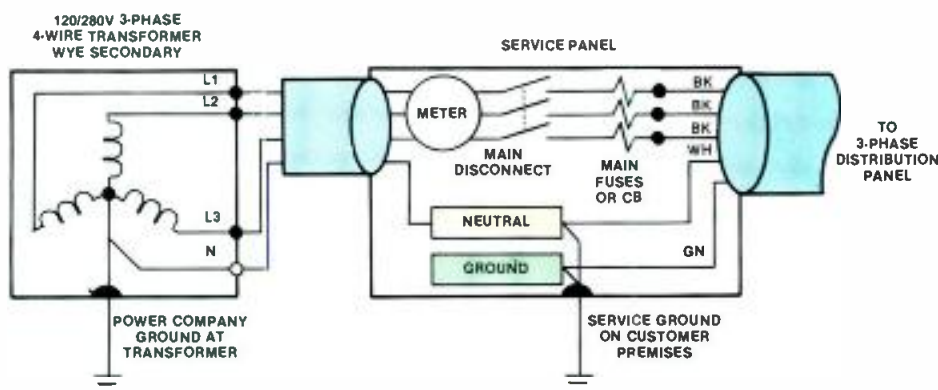


Figure 8. The recommended connection method for a 3-phase utility-company service panel. (Reference 3.)

Ampex Reader Service

Please print. Note that all information is required for response.

☐ Mr
☐ Mrs

Name ☐ Ms. (first) _____ (last) _____

Title (check closest box) ☐ Corporate or General Manager ☐ Financial Manager
☐ Engineering Manager/Director ☐ Technical Manager/Director ☐ Facilities Director
☐ Production Manager/Director ☐ Operator ☐ Editor ☐ Artist ☐ Other

Company _____

Address _____

City _____ **State** _____ **Zip** _____

Phone () _____ **Ext** _____

- ☐ Please have a Sales Engineer call me immediately. I need price and delivery information.
- ☐ Please send me additional information on the Ampex Vista Switcher.
- ☐ Please send me an Ampex full line brochure.

Please send me information on the following Ampex products:

Type C Video Tape Recorders: ☐ VPR 3 ☐ VPR 5 ☐ VPR 6 ☐ VPR 80
☐ Zeus Advanced Video Processor

AVC Series Production Switchers: ☐ Century ☐ AVC Std ☐ 4100

Betacam SP: ☐ Recorders ☐ Cameras ☐ Camcorders

☐ **ACE** Editors ☐ **ADO** Special Effects ☐ **AVA** 2D Graphic and Paint System

☐ **ESS** Image Storage and Composition System ☐ **ACR-225** Automatic Spot Player

Please check the single block under each heading that best describes you:

Business Classification: ☐ Broadcast ☐ Cable ☐ Community Access TV
☐ Production ☐ Post Production ☐ Education ☐ Corp/Ind ☐ Government
☐ Other _____

Purchase Authority: ☐ Recommend ☐ Specify ☐ Approve ☐ None

Plan to Purchase: ☐ Immediately ☐ Within 3 mos ☐ 3 to 6 mos

☐ 6 to 12 mos ☐ No Purchase Planned (Information only)



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES


BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 23773 REDWOOD CITY, CA

POSTAGE WILL BE PAID BY ADDRESSEE

Ampex Corporation

Audio-Video Systems Division
3892 Sacramento Street, #1
San Francisco, CA 94118-9905




**Complex layering,
creative transitions and
digital effects control
take a powerful switcher...**

42" —

19"

12"

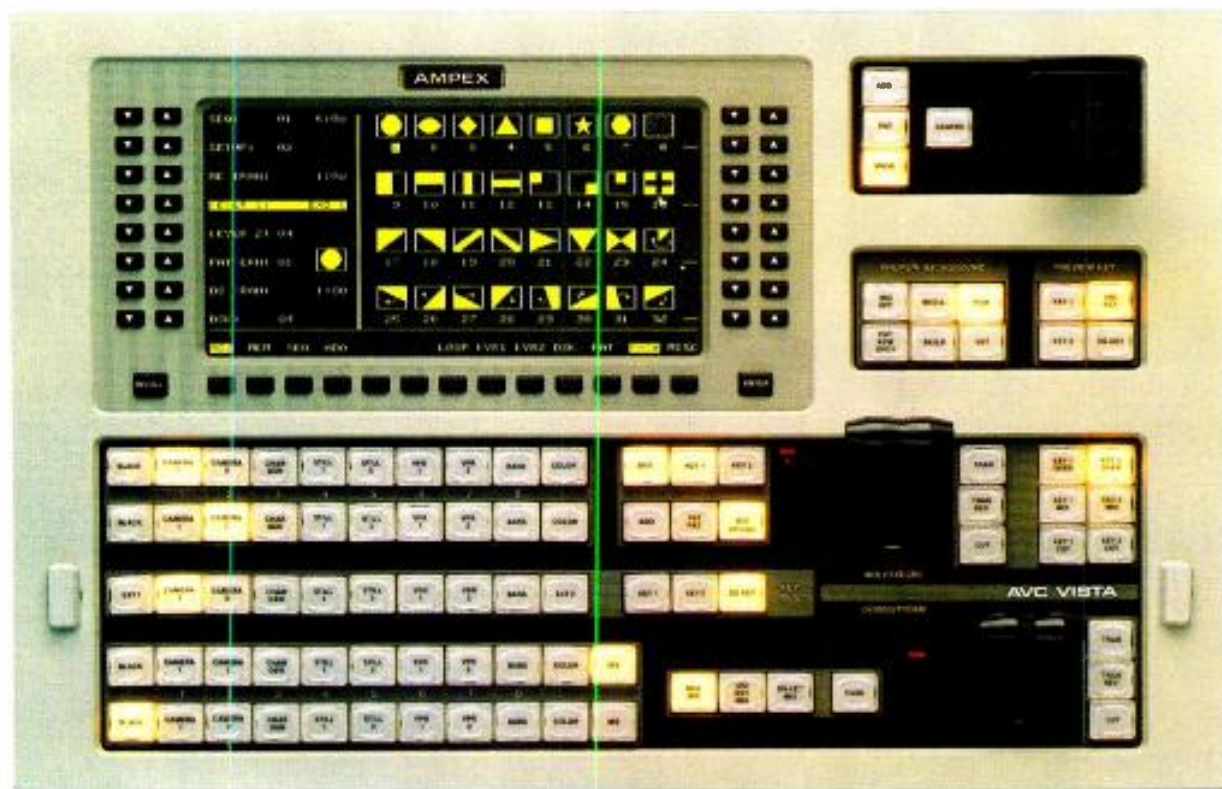

One. Introducing Vista.TM

The new Vista switcher will absolutely change the way you look at switchers.

Vista gives you all the power and ease-of-use of a "big" switcher, in a third the space and at *half* the price.

First of all, you get four keyers and twelve busses with full program preset mix capability.

That makes complex layering and sophisticated production easier. You don't have to make multiple passes, and fewer generations means you'll get cleaner pictures.

Revolutionary electro-luminescent display

The Vista switcher has a revolutionary display that simplifies your most complicated production tasks. It puts the information you need about operating status and memory setups right in front of you, so you'll always know where you are.



And few switchers of *any* size have a memory like Vista. It stores 24 complete panel set-ups and 24 sequences for fast, easy recall of any combination of switcher operations.

Unprecedented digital effects control

When it comes to inserting and manipulating ADOTM or other digital effects, the Vista switcher virtually doubles your capability. Effects that take two M/Es with ordinary switchers require only one on Vista, thanks to our new DigiLoopTM effects circuit.

So compare. You'll find big power no longer has to mean big size *or* big bucks.


You can get a Vista switcher brochure by filling out and mailing the attached card.

Or better yet, give us a call today.

AMPEX

Atlanta (404) 491-7112 Chicago (312) 593-6000
Dallas (214) 960-1162 Los Angeles (818) 365-8627
New Jersey (201) 825-9600
(In New York (212) 947-8633)
San Francisco (415) 367-2202
Washington D.C. (301) 530-8800
Canada (416) 821-8840

25"

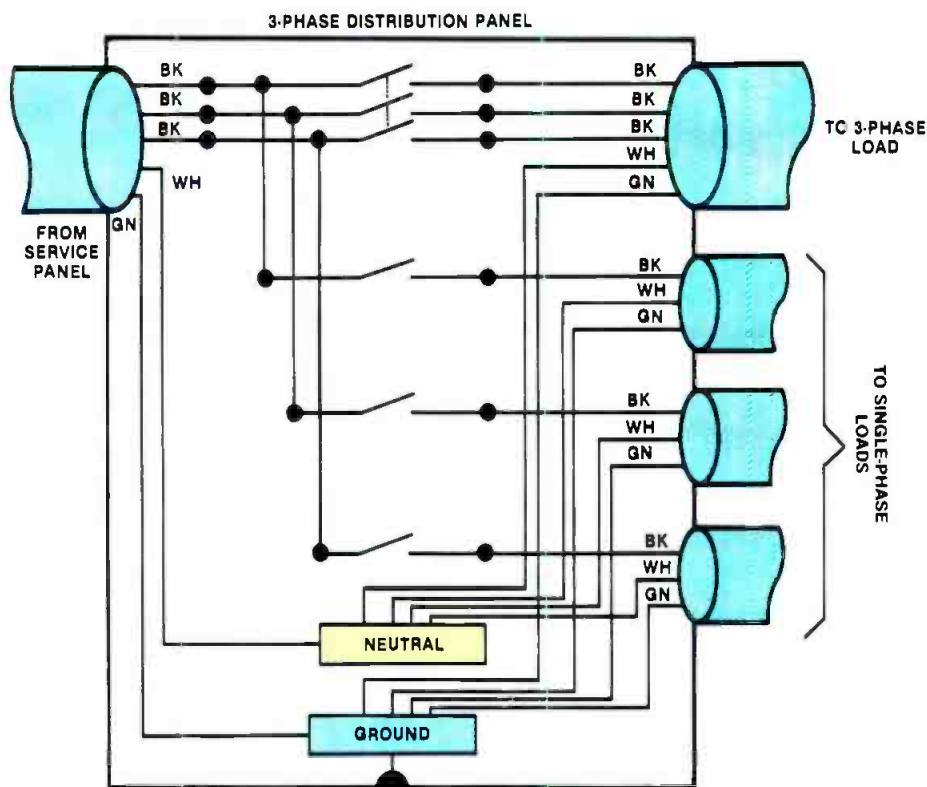

Continued from page 48
power-system changes, review the entire project with a qualified electrical contractor.

Discrete device protection

A broadcast facility can be protected from transient disturbances in two basic ways: the *systems* approach or the *discrete device* approach. Table 2 (see page 34) outlines the major alternatives available for the systems approach to transient suppression:

- UPS (uninterruptible power supply) system and standby generator.
- UPS stand-alone system.
- Secondary ac spot network.
- Secondary selective ac network.
- Motor-generator unit.
- Shielded isolation transformer.
- Solid-state line-voltage regulator/filter.

The systems approach offers the advantages of protection engineered to a particular application and need, and (usually) high-level factory support during system design and installation. However, it costs more. Many facilities cannot justify spending \$5,000 or more for a sophisticated protection system. For such in-

Vanguard Series™

Stereo Broadcast Consoles

Performance, Value and Reliability through Innovative Technology

- Full Featured On-Air Performance
- Reliable VCA Faders and Electronic Switching
- Serviceable Plug-in Circuit Boards
- Quick Punch Block Installation
- RF Protection that Works!

BC12DSL
12 Mixers • 24 Inputs
Dual Stereo Outputs
\$4995

BC8DSR/L
8 Mixers • 12 Inputs
Dual Stereo Outputs
\$3195


Call or write NOW for free detailed color brochure.

AUDIO TECHNOLOGIES, INC.
328 Maple Avenue, Horsham, PA 19044 • (215) 443-0330

Our World
Of Audio DAs
Is Growing...

DATATEK

Now TWO Stereo Audio DAs Available From Datatek!

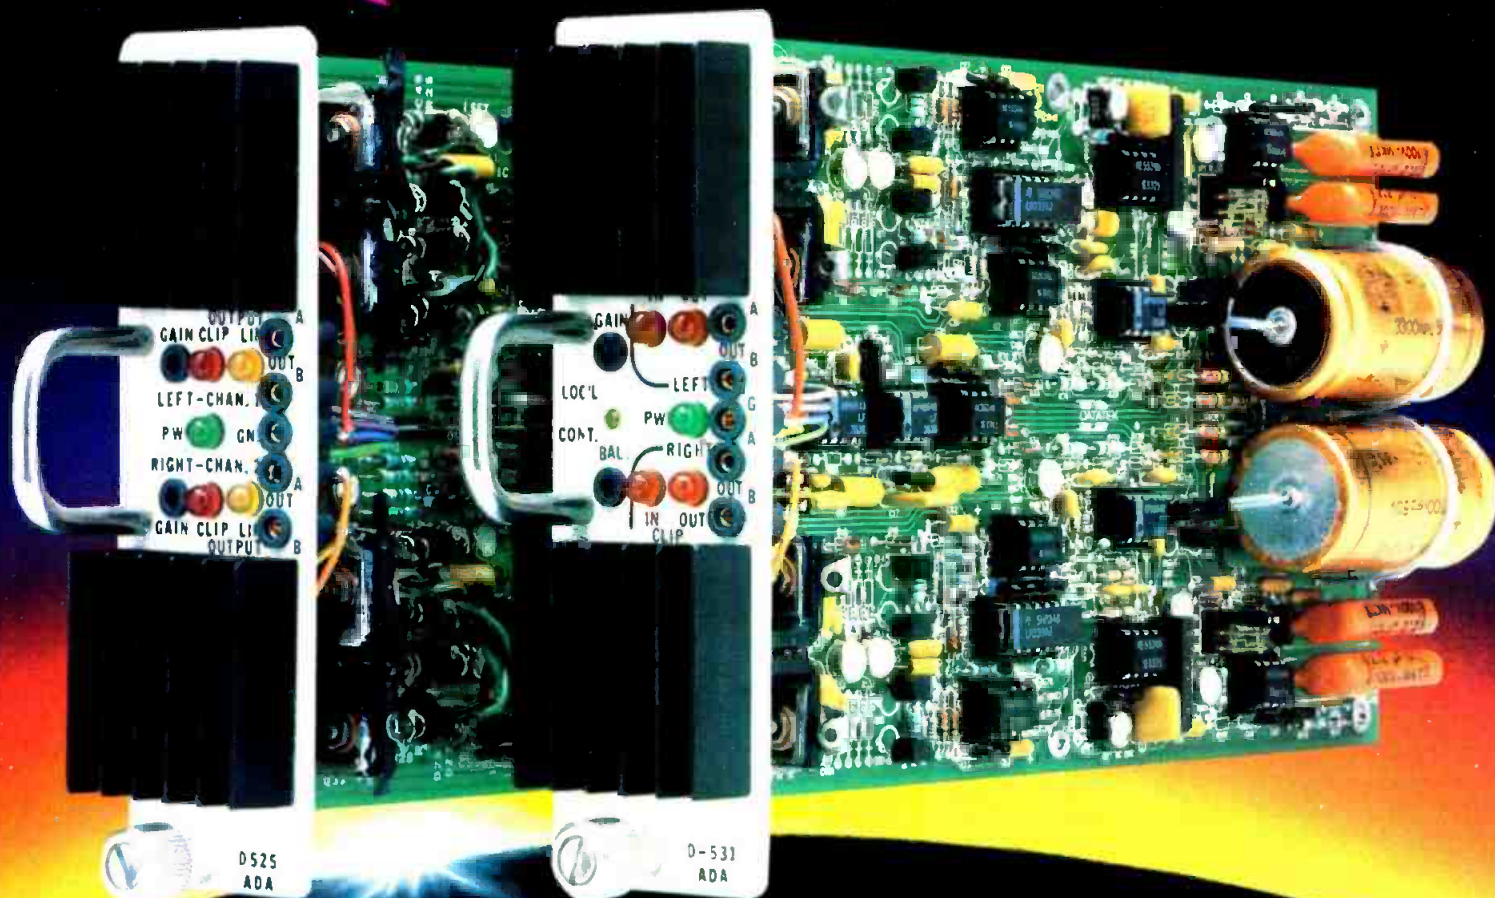

D-525 DUAL CHANNEL/STEREO AUDIO DA

- Two isolated channels for use in stereo or dual distribution amplifier applications
- Used for one stereo input and 6 balanced stereo outputs, one monaural input with 12 outputs, or 2 monaural inputs with 6 balanced outputs each
- 0.05% max. distortion at +27 dBm

D-531 STEREO AUDIO DA WITH REMOTE GAIN

- Local and/or remote control of gain and balance, with accurate tracking over the gain range
- Six balanced stereo outputs with 0.05% max. distortion at +27 dBm
- Two balanced mono sum (L + R) outputs at up to +28dBV available simultaneously with stereo outputs

*For a descriptive
brochure and
further information
call or write:*

DATATEK
CORP.



For Excellence In Antennas

- A complete line of TV and FM Broadcast Antennas
- Modern 7,000 ft. test range facilities
- Innovative Engineering Careful construction
- Two Year Warranty on Product and Workmanship



With over 1500 delivered, we've helped more stations penetrate their market.

FCC Directionals
Pattern Studies
Multi-Station Arrays
Full Scale Measurement

JAMPRO ANTENNAS, Inc.
6939 Power Inn Road
Sacramento, CA 95828
(916) 383-1177 TELEX 377321

Circle (30) on Reply Card

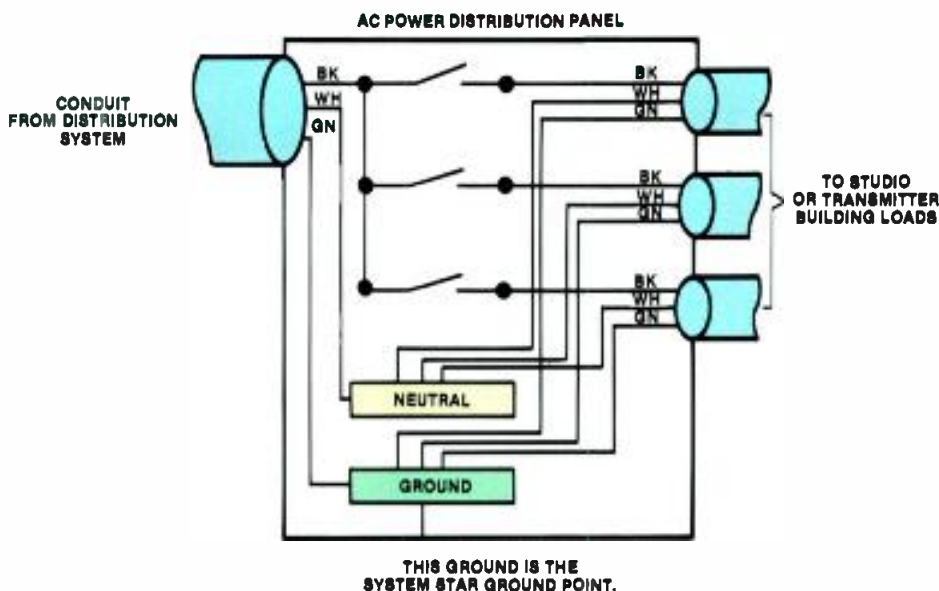


Figure 10. Arrangement of the neutral and green-wire ground system for a single-phase ac distribution panel. (Reference 3.)

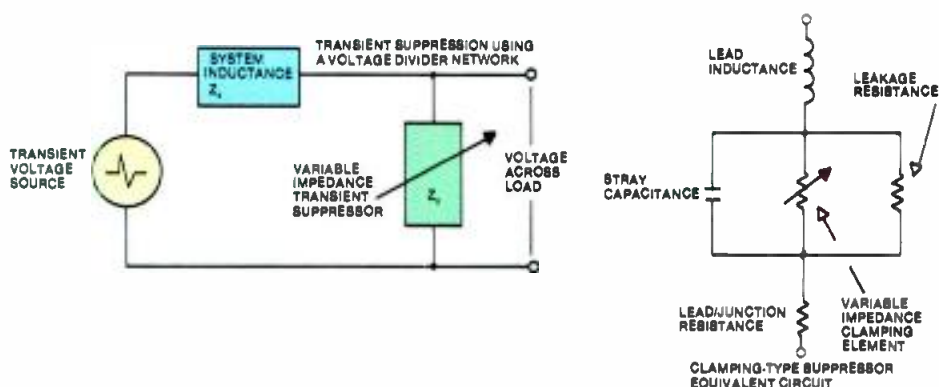


Figure 11. The mechanics of transient suppression using a voltage-clamping device.

stallations, the only alternative is to apply discrete protection devices at critical points in the ac power system.

In the business of transient protection, you get what you pay for. Discrete devices are less expensive and usually provide less protection compared with a sophisticated systems approach. It is unrealistic for a user to expect a group of discrete transient suppressors to do the job of a much more expensive systems design. However, properly applied discrete devices can prevent equipment damage from all but the most serious transient disturbances. The key to achieving this level of performance lies in understanding and properly applying discrete protection devices.

The performance of the discrete transient-suppression components available

Continued on page 58

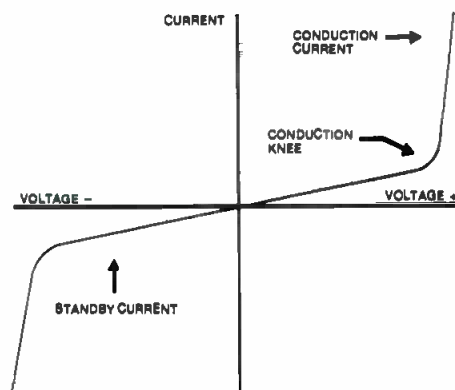


Figure 12. The voltage-vs.-current curve for a typical bipolar voltage-clamping device. The component is designed to be essentially invisible in the circuit until the applied positive or negative potential reaches or exceeds the conduction knee of the device.



1/60 sec.

1/2000 sec.

Put more thrill in your stills

Action video with film clarity from the CCD camera with electronic shutter

When the action heats up and the sun beams down, put your finger on the electronic shutter of the SP-3A. It stops the action at speeds up to 1/2000 second—fast enough to give you stunning slow motion or freeze frames with the clarity of 35mm slides.

The SP-3A incorporates an electronic shutter function in its CCD chip design. Five shutter speeds give you the flexibility to record any action with outstanding results. The CCD chip works wonders with dynamic resolution.

Don't worry about burn-in, comet-tailing or smear. Shoot into the sun with impunity. Kick in the black stretch func-

tion and get all the detail in backlit scenes. Indoors or out, good light or bad, the SP-3A performs to the most exacting professional requirements.

THE NEW ENG/EFP STANDARD

The compact, lightweight SP-3A stands up to tough on-location assignments. It's the



CCD camera of choice for one of the largest network news organizations in the USA.

As a camcorder, the SP-3A accepts either Betacam or M-II 1/2" format integral VTRs. You can also configure it for standard NTSC output or remote control via multi-core or triax cable.

Betacam is a registered trademark of Sony Corp.

Make sure you're equipped to take your best shot on every assignment. Use the SP-3A CCD broadcast camera with five-speed electronic shutter. For more information, call NEC today.

NEC America, Inc.
Broadcast Equipment Division,
1255 Michael Drive, Wood Dale, Illinois 60191
Tel: 312-860-7600

C&C

Computers and Communications

Circle (63) on Reply Card

NEC

The only name you need to know



No matter what kind of business you're in, when it comes to answering all your video needs, there's only one name you need to know: *Panasonic*.® And one number you need to call: 1-800-553-7222. Once you do, you'll see that *Panasonic* offers you one of the largest selections of video components and accessories. But it's what's behind our product line that really sets us apart.

Take our dealer network. There are over 300 authorized *Panasonic* Professional/Industrial dealers throughout the country. Each with the expertise and technical know-how to help you select and design the video system that's just right for you.

Just as important and equally impressive is our nationwide service network. Each of our service centers is staffed by technicians who've gone through

for all your industrial video needs.



intensive training programs on the repair and maintenance of every professional/industrial video product we sell.

So whether you're into video production, post-production, training, or sales demonstration, when it comes to video, it's easy to see just how much Panasonic Professional/Industrial Video can do for your business.

Panasonic

Professional/Industrial Video

Call Panasonic Industrial Company at 1-800-553-7222 for more information and your nearest Panasonic Professional/Industrial Video dealer.

Circle (32) on Reply Card

www.americanradiohistory.com

Continued from page 54

to the broadcast engineer has greatly improved in the past 10 years.

The variety of reasonably priced devices now available makes it possible to exercise tight control over unwanted

voltage excursions and allows the complicated electronic equipment being manufactured today to work as intended. Much of the credit for transient-suppression work goes to the computer industry, which has been dealing with the problem

for more than two decades.

Types of devices

Transient-suppression hardware can be divided into three categories: *ac filters*, *crowbar devices* and *voltage-clamping components*.

The simplest type of ac power-line filter is a capacitor placed across the voltage source. The impedance of the capacitor forms a voltage divider with the impedance of the source, resulting in the attenuation of high-frequency transients. This simple approach has definite limitations in spike-suppression capability and may introduce unwanted resonances with inductive components in the ac power-distribution system.

The addition of a series resistance will reduce the undesirable resonant effects, but it also will reduce the capacitor's effectiveness in attenuating a transient disturbance.

Crowbar devices include gas tubes (also known as spark-gaps or *gas-gaps*) and semiconductor-based *active crowbar* protection circuits. Although these devices and circuits can shunt a substantial amount of transient energy, they are subject to *power-follow* problems.

Once a gas tube or active crowbar pro-

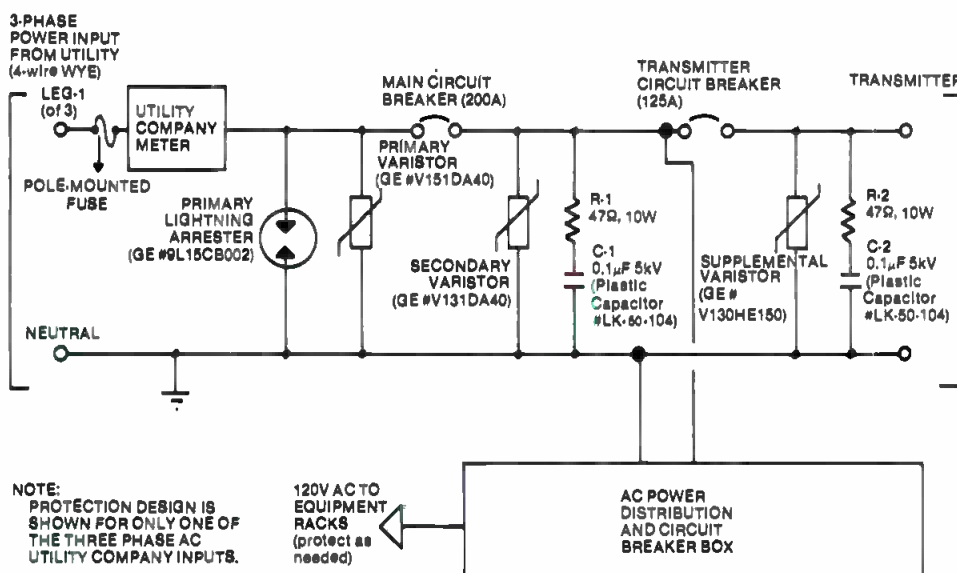


Figure 13. The application of transient-suppression components to a systemwide protection plan. Install such hardware with extreme care, and only after consultation with the local utility company and an electrical contractor.

QUALITY LAPSES?



Get fast relief with Eastman professional video tape.
Call your Kodak representative or
phone 1 800 445-6325, Ext 801.

© Eastman Kodak Company, 1987

Eastman
Professional Video Tape

Circle (33) on Reply Card

SOME THINGS NEVER CHANGE.... JUST GET BETTER



AUDIO DAs

- ° ONE INPUT, SIX TRANSFORMER OR DIFFERENTIAL BALANCED OUTPUTS
- ° MASTER GAIN CONTROL PLUS INDIVIDUAL CONTROLS ON EACH OUTPUT
- ° MAXIMUM HEADROOM
- ° FIELD-PROVEN RELIABILITY
- ° COMPATIBLE WITH EXISTING SYSTEMS
- ° SUPPORTED BY A LARGE SELECTION OF CONTROL/BUFFER/INTERFACE MODULES AND POWERED RACK ENCLOSURES

THE BROADCASTER'S CHOICE
INTERCOM, DISTRIBUTION, MONITORING SYSTEMS

—ROH—
A DIVISION OF ANCHOR AUDIO, INC.

913 West 223rd. Street Torrance, CA 90502
(800)262-4671 In CA:(213)533-5984
Telex:9102 400 141 Fax:(213)533-6050

Circle (34) on Reply Card

LEADER



Once-in-a-lifetime events don't happen twice!

This 8-lb EFP/ENG Monitor confirms your field productions are perfect, first time, every time!

The LVM-5863A Color/Audio/Waveform Monitor confidence tests camera and VCR performance anywhere. Shows you the overall production quality immediately...with full color (NTSC) and sound. LVM-5863A lets you be sure all your productions are technically and artistically correct before you leave the location. The LVM-5863A confirms white balance, sync and burst levels. Its **2H and 2V waveforms** show both line and field rate signals. A switchable IRE filter makes it easy to check peak video. And for



LVM-5863A

accurate verification of setup and black balance, switch on the **4x magnifier**. With all this, the LVM-5863A is easy to use since controls are kept to a minimum.

It goes anywhere.

Lightweight and small, the LVM-5863A is easy to hand carry or to mount in trucks, vans or helicopters. Requiring only 12 Vdc, it can use a readily available, self-contained battery (Sony NP-1 or equivalent) or external power sources such as vehicles and EFP battery belts.

Quickly pays for itself.

The LVM-5863A eliminates the risk of time-wasting, cost-increasing, missed or poor-quality shots.

Call toll-free
(800) 645-5104
In NY State
(516) 231-6900


Request an evaluation sample, our latest Test Instrument Catalog with over 100 outstanding products, the name and address of your nearest "Select" Leader Distributor, or additional information.

For professionals who know the difference.
LEADER
Instruments Corporation

380 Oser Avenue, Hauppauge, New York 11788
Regional Offices:
Chicago, Dallas, Los Angeles, Boston, Atlanta
In Canada call Omnitronix Ltd. (514) 337-9500

For Product Demonstration Circle (204) on Reply Card

For Product Information Circle (205) on Reply Card

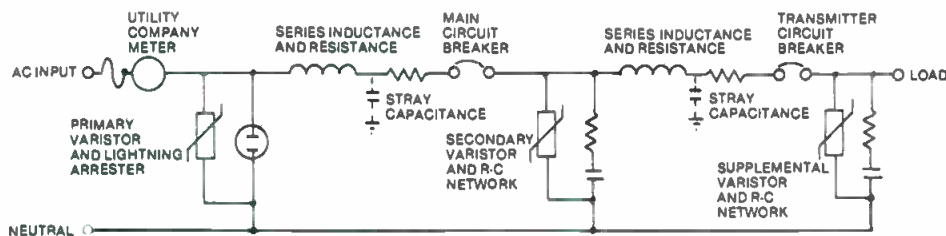

NOTE:
ONLY ONE AC
PHASE IS SHOWN
FOR SIMPLICITY.

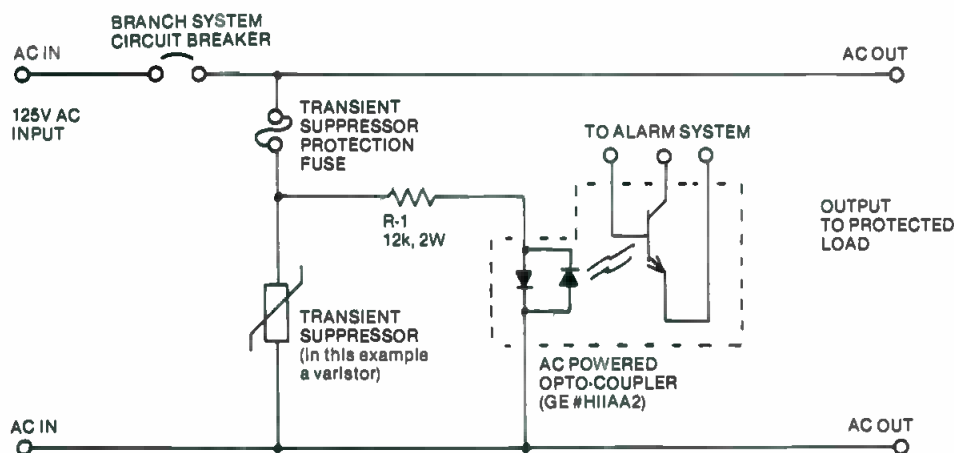


Figure 14. The use of ac system series inductance and resistance to aid transient suppressors in controlling line disturbances. This technique is known as staging.

tection circuit has fired, the normal line voltage and the transient voltage are shunted to ground. This power-follow current may open protective fuses or circuit breakers if a method of extinguishing the crowbar clamp is not provided.

Voltage-clamping devices are not subject to the power-follow problems common in crowbar systems. Clamping devices include selenium cells, zener diodes and varistors of various types.

Zener diodes, using improved silicon rectifier technology, provide an effective voltage clamp for the protection of sensitive electronic circuitry from transient disturbances. On the other hand, power dissipation for zener units is usually somewhat limited (compared with other suppression methods).

Selenium cells and varistors are differ-

Figure 15. An open-fuse alarm circuit for a fused transient suppressor.

DROPOUTS?



Get fast relief with Eastman professional video tape.
Call your Kodak representative or
phone 1 800 445-6325, Ext 801.
© Eastman Kodak Company, 1987

Eastman
Professional Video Tape

**Do You Want
To 'Talk' Audio?**

**AESNET
ON
COMPUSEVE**

**John Hoffman
Net
Administrator
76703, 1036**

Circle (38) on Reply Card



BTS LDK 6A. The computer camera that leaves you in control of every situation

The LDK 6A is the computer camera that gives you more time to concentrate on what's important—creativity.

All camera functions are controlled automatically by Total Computer Control monitoring well over 1000 settings. This allows tubes to be changed minutes before on-air.

Full automatic set-up is achieved by pressing one button only ensuring perfectly registered pictures again and again.

Digital correction of scans, shading and dynamic focus at an optimal 49 points in the picture achieves the highest standard of picture quality. And the same high standard is maintained throughout the whole life of the Plumbicon tubes—the computer system adjusts automatically for aging. Anti-comet tail or dynamic beam control circuits ensure excellent highlight handling. On-line diagnostics warn of potential problems before they become a fault that results in costly downtime. The LDK 6A is complemented by the compatible portable production camera—the LDK 54A.

Both are compatible with COACH, the remote-control and monitoring system for the LDK 6A family of triax cameras. COACH provides you with a very powerful maintenance facility linking cameras in any location to your engineering base.

You can rely on LDK 6A, the computer camera that keeps everything under control.

For more information contact

BTS Inc.

P.O. Box 30816

Salt Lake City, Utah 84130-0816

Phone: (801) 972-8000.



Sales and Service Headquarters

900 Corporate Drive

Mahwah, New Jersey 07430

Phone: (201) 529-1550.

"Customer Satisfaction Is Our Satisfaction"

BTS Broadcast
Television
Systems

A joint company of Bosch and Philips

Circle (38) on Reply Card

Regional Sales Offices

New York City
(201) 529-1550

Midwest
(312) 803-8060

Northeast
(207) 283-0777

Allegheny
(201) 529-1550

Mid-Atlantic
(703) 461-0188

Southeast
(904) 492-1600

Southwest
(512) 335-1481

Great Plains
(507) 334-1891

Northern California
(818) 766-8184

Southern California
(818) 766-8184

Intermountain
(801) 972-8000



One, two, three o'clock, four o'clock log. The Dictaphone 5600 Veritrac® logger lets you log . . . log . . . log around the clock.

It's a complete broadcast recording retrieval system that lets your radio station keep its entire broadcast day on the record. In one dependable unit you get around-the-clock verification that you're running your advertisers' spots on schedule and meeting all your FCC requirements. Should you require proof, just play back your log around the clock. And it's all there on tape.

The 5600 Veritrac logger. A classic from Dictaphone.

For more information, fill in the coupon, or call toll-free: QBE-117

1-800-342-8439

Mail to: Dictaphone Corporation,
120 Old Post Road, Rye, NY 10580-0648

Name _____
Title _____ Phone _____
Company _____
Address _____
City _____ State _____ Zip _____

Dictaphone® and Veritrac® are registered trademarks of Dictaphone Corporation, Rye, N.Y. ©1987 Dictaphone Corporation



A Pitney Bowes Company
Circle (39) on Reply Card

ent in construction, but act similarly on a circuit exposed to a transient overvoltage. Figure 11 illustrates the variable non-linear impedance exhibited by a voltage-clamping device. It also shows how these components can reduce transient overvoltages in a particular circuit.

The voltage-divider network established by the source impedance (Z_s) and the clamping device impedance (Z_c) attenuates voltage excursions at the load. It should be understood that the transient suppressor depends upon the source impedance to aid the clamping effect. A protection device cannot be fully effective in a circuit that exhibits a low source impedance because the voltage-divider ratio is reduced proportionately.

A typical voltage-vs.-current curve for a voltage-clamping device is shown in

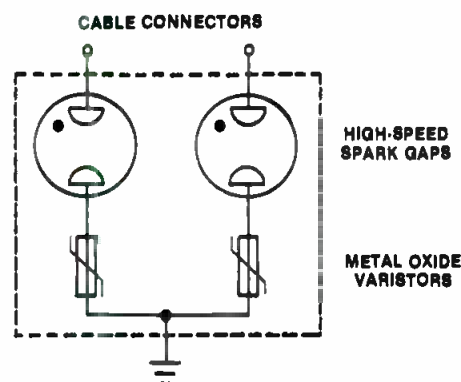


Figure 16. A hybrid voltage-protection device incorporating a gas tube spark gap and varistor in each suppression element. The design goal is to extend the life of the varistor. (Reference 4.)

Figure 12. When the device is exposed to a high-voltage transient, the impedance of the component changes from a high-standby value to a low-conduction value, clamping the voltage at a specified level.

Selecting a protection device

Selecting a transient-suppression device for a particular application is a complicated procedure that must take into account the following factors:

- The steady-state working voltage, including normal tolerances.
- The transient energy to which the device is likely to be exposed.
- The voltage-clamping characteristics required in the application.
- Circuit-protection devices (such as fuses or circuit breakers) present in the system.
- The consequences of protection-device failure in a short-circuit mode.
- The sensitivity of the load equipment to transient disturbances.

Most transient-suppression equipment manufacturers offer detailed application handbooks. Consult such reference data whenever you plan to use a protection device. The specifications and ratings of suppression components are not necessarily interchangeable from one manufacturer to another.

Carefully weigh the addition of transient-suppression devices to a piece of equipment or ac power-distribution system. Make allowances for operation of the circuit under all conditions.

Power protection

Transient-protection methods for a broadcast facility vary considerably depending on the size and complexity of

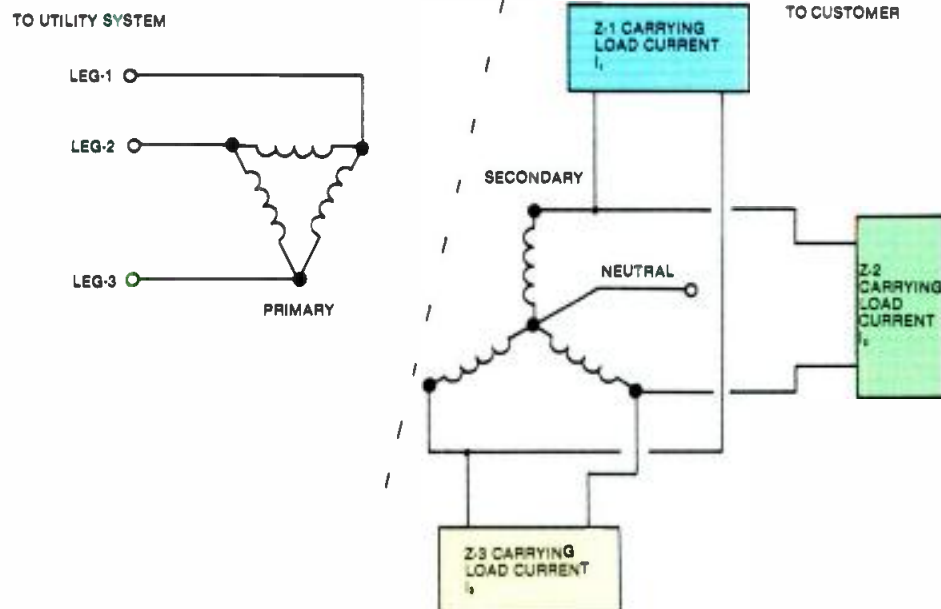


Figure 17. The Delta-Wye transformer configuration for utility-company power distribution.

9-BIT VERSION
NOW AVAILABLE



UNWANTED FRAME GRABBING STOPS HERE



DFS-3000N Digital Frame Synchronizer

If your video synchronizer lets you down on a noisy feed, you need the new Leitch DFS-3000N. This digital frame synchronizer incorporates input processing circuitry that uses the latest in digital auto-correlation techniques to prevent intermittent frame grabbing or switching to black. Only Leitch offers this capability.

Now you know one of the features of the Leitch DFS-3000N. But the advantages don't stop there. Neither should you. Write or call (toll free) for further information.

In U.S.A. 1-800-231-9673
In Canada 1-800-387-0233

LEITCH

Progressive Concepts in Television Technology

Leitch Video of America, Inc.
825k Greenbrier Circle
Chesapeake, VA 23320
(804) 424-7920

Leitch Video International Inc.
10 Dyas Road, Don Mills
Ontario, Canada M3B 1V5
(416) 445-9640

Circle (40) on Reply Card

www.americanradiohistory.com

the plant, the sensitivity of equipment at the facility and the extent of transient activity on the primary power lines.

Figure 13 shows one possible approach to transient suppression for a broadcast facility. Lightning arresters are built into the 12kV to 208V 3-phase pole-mounted transformer. The service drop comes into the meter panel and is connected to a *primary lightning arrester* (General Electric Company No. 9L15CB002) and a *primary varistor* (GE No. V151DA40).

The circuit shown in Figure 13 is duplicated three times for a 3-wire Wye (208V phase-to-phase, 120V phase-to-neutral) power system.

The primary arrester and varistor are placed at the service drop input point to protect the main circuit breaker and power-system wiring from high-voltage transients that are not clipped by the lightning arrester at the pole or by the varistors later in the circuit path.

The primary varistor has a higher maximum clamp voltage than the varistors located after the main breaker, causing the devices downstream to carry most of the clamp-mode current when a transient occurs (assuming low system inductance). If the main circuit breaker opens during a transient disturbance, the varistor at the service drop entrance will

keep the spike voltage below a point at which it could damage the breaker or system wiring.

Placing overvoltage protection before the main service breaker may be considered *only* when the pole-mounted transformer feeds a single load and when the transformer has transient protection of its own, including lightning arresters and primary-side fuses. *Consult the local power company before you place any spike-suppression devices ahead of the main breaker.*

Transient protection immediately after the main breaker consists of a *secondary varistor* (GE No. V131DA40) and a capacitor (0.1 μ F at 5kV) between each leg and neutral. A 47 Ω 10W series resistor protects the circuit if the capacitor fails. It also reduces the resonant effects of the capacitor and ac distribution-system inductance.

The varistor clips overvoltages as previously described, and the resistor-capacitor network helps eliminate high-frequency transients on the line. The capacitor also places higher capacitive loading on the secondary of the utility-company step-down transformer, reducing the effects of turn-on spikes caused by capacitive coupling between the primary and the secondary of the pole- or surface-

mounted transformer.

As an extra measure of protection, a *supplemental varistor* (GE No. V130-HE150) and RC snubber are placed at the primary power input to the transmitter. Transient suppressors are placed as needed at the ac power distribution and circuit-breaker box.

Staging

The transient-suppression system shown in Figure 13 uses a technique known as *staging* of protection components. An equivalent circuit of the basic system is shown in Figure 14. The staging approach takes advantage of the series resistance and impedance of the ac wiring system of a facility to aid in transient suppression.

When appreciable inductance or resistance exists in an ac distribution system, the protection components located at the utility-company service-drop entrance (the primary suppressors) will carry most of the suppressed-surge current in the event of a lightning strike or major transient disturbance. The varistors and RC networks downstream (the secondary and supplemental suppressors) are rated for clamp voltages lower than the primary protection devices. With the assistance of the ac circuit series resistance


It's 3:55 a.m. Do you know what your transmitter is doing?


Now your transmitter can alert you to problems by phone—anywhere, anytime with the VRC-1000 Remote Control. A preprogrammed, synthesized voice quotes parameters; you make adjustments right on your Touch-Tone® phone. Or, you can dial from any-

where for fast trouble-shooting capability.

- VDT and printer options
- Full automatic commands
- Fully secure
- Automatic alarm reporting and correction

GENTNER Patent Pending
RF PRODUCTS DIVISION

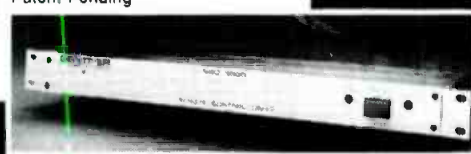

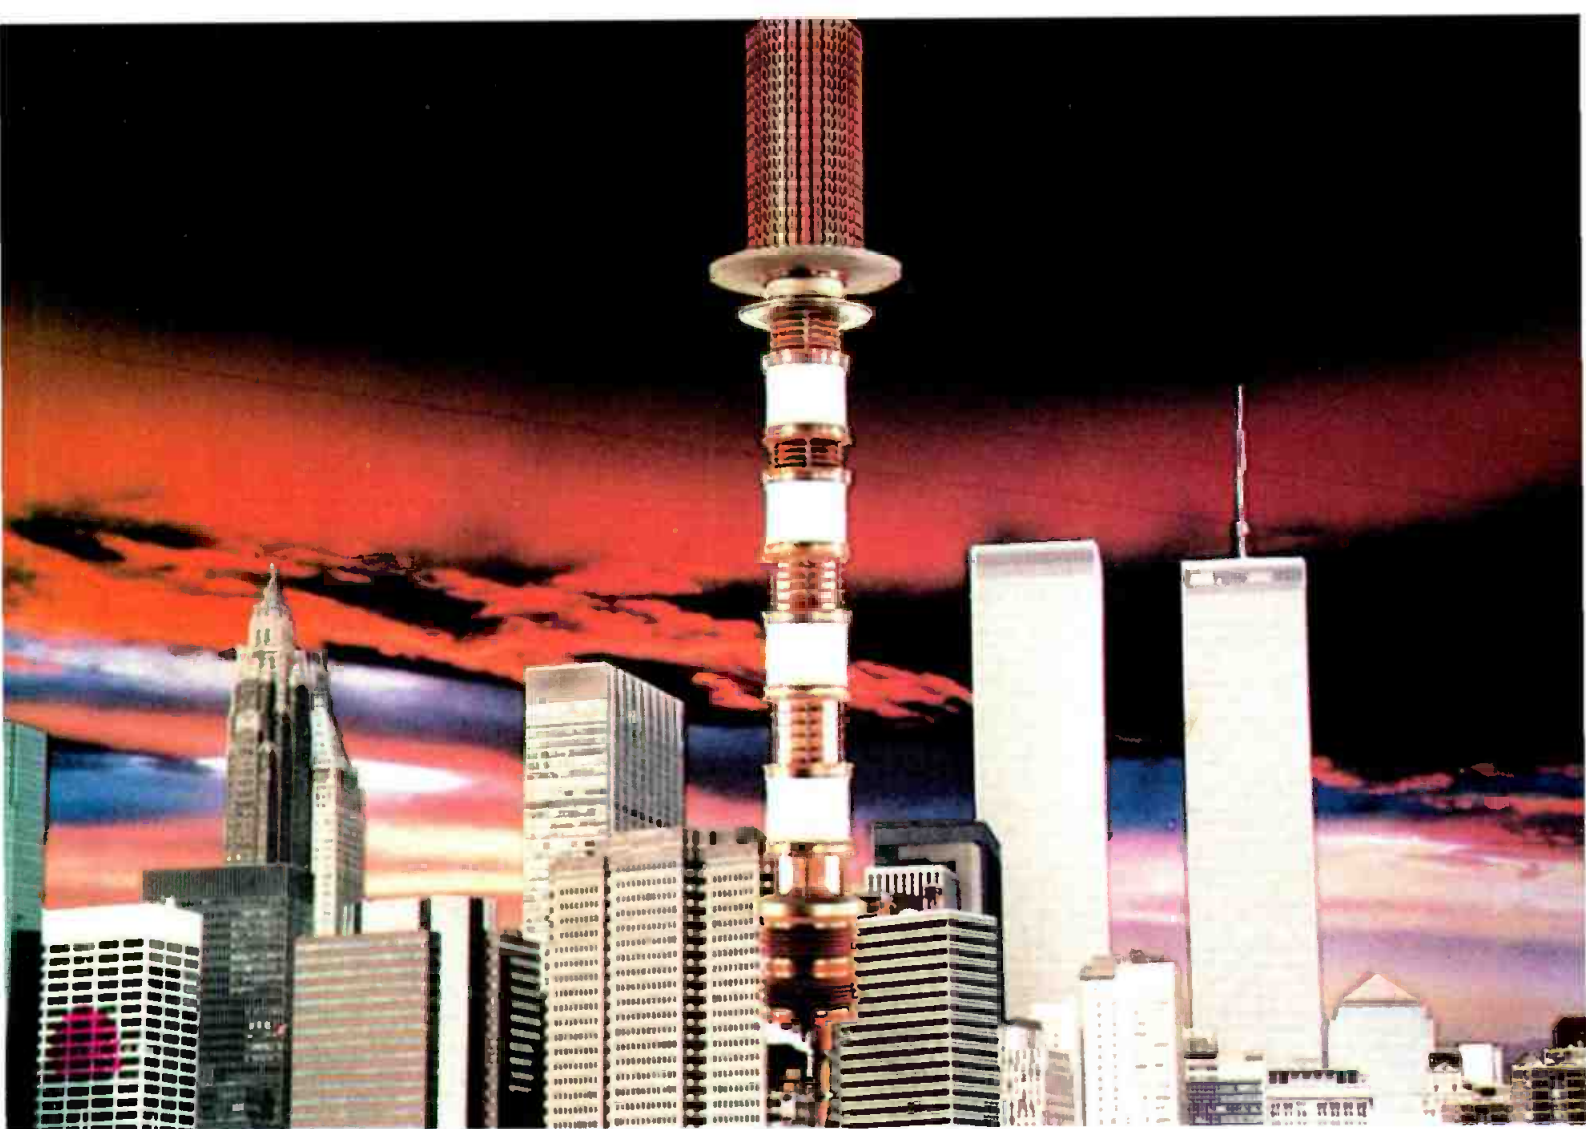

“Our Klystrons have tested tough in the field and proven to lower operating costs”

Rugged Amperex klystrons get you on the air, and keep you on longer, at a lower cost. Amperex UHF klystrons are built with more than three decades of design, production and proven field experience that broadcasters have come to rely on.

Performance data shows that our unique alumina ceramic-to-metal construction adds significantly to the life of our tubes. Actual station records show Amperex klystrons having average operating lifetimes exceeding 32,000 hours and peak lifetimes in excess of 80,000 hours.

Amperex klystrons reduce your operating costs. The advanced, low voltage, Annular Beam Control design allows you to operate with efficiencies in excess of 65%. Cooling costs are also reduced by giving you a choice of a highly effective vapor cooling, vapor condensation or water cooling system.


By using an innovative external cavity design there is at least a 40% savings in tube replacement cost, com-

pared to internal cavity klystrons, since only the tube is replaced.

With Amperex klystrons you select tubes with output power up to 64kW. Any one tube can cover the entire UHF range of 470MHz to 860MHz.

When you want the “tough tubes”, choose the Amperex klystrons with proven “on-the-air” performance.

Ask about our new YK1270 air cooled klystron with an output power of 16.5 kW vision or 11 kW combined.

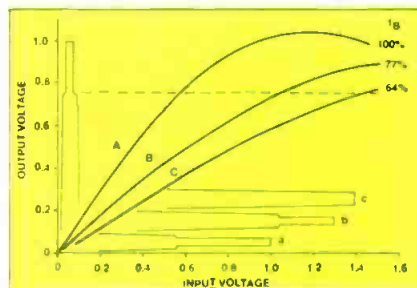

KLYSTRON OUTPUT VOLTAGE VERSUS INPUT VOLTAGE (RELATIVE VALUES)

800-227-1613

Thinking of new installations, retrofiting, improving on-the-air performance or reducing operating costs? Call Peter Fochi at the above toll free number for complete information.

Amperex® Electronic Corporation

A NORTH AMERICAN PHILIPS COMPANY

230 Duffy Avenue, Hicksville, NY 11802

Phone: 516/931-6200 TWX: 510/221-1839 WATTS: 1-800-227-1613

Circle (42) on Reply Card

Cheer Thrills

Videotek's new "no-frills" waveform monitor keeps value-minded engineers happy.

Get back to basics with the new TSM 50, the most affordable 5" waveform monitor you're likely to find anywhere.

Right from the box, this economical, "no-frills" unit is ready to go to work. With two selectable inputs; switchable FLAT, IRE or CHROMA filtering and bandwidths up to 6 MHz for almost every application. It's built to be reliable and designed to get the job done right.

Don't pay for bells and whistles you don't need. See your Videotek dealer for the happy details today.



VIDEOTEK
INC.

Designed for real needs.
Priced for real budgets.

243 Shoemaker Road, Pottstown, Pennsylvania 19464
(215) 327-2292 TWX 710-653-0125 FAX (215) 327-9295

Circle (101) on Reply Card

DATUM 5300 ITP



Intelligent Time Processor

The 5300 ITP provides SMPTE/EBU time code support for any video application. The unit is expandable, with configurations ranging from a basic LTC reader/generator to a full-function processor with VITC and character insertion.

- Microprocessor Based
- NTSC and PAL Formats
- Dub or Jam Sync Modes
- Parallel BCD Time Outputs
- User Bit Outputs
- Character Inserter Option
- VITC Reader/Gen Option
- Expandable Design
- Low Power Requirements
- Compact, Modular Design

For more information on this and other DATUM video products, call or write.

datum inc Timing Division

1363 S. State College Blvd., Anaheim, CA 92806-5790
(714) 533-6333

Circle (102) on Reply Card

and impedance, they exercise tight control over voltage excursions.

Staged suppression design also protects the system from exposure caused by a transient-suppression device that becomes ineffective. The performance of an individual suppression component is more critical in a system that is protected at only one point than it is in a system protected at several points. The use of staged suppression also helps prevent transients generated by load equipment from being transmitted to other sections of a facility, because suppressors can be located near offending loads.

Do not place transient suppressors of the same type in parallel to gain additional power-handling capability. Even suppressors that are identical in part number have specified tolerances, so devices placed in parallel will not share the suppressed-spike current equally.

Design cautions

Install transient suppressors at the utility service entrance with extreme care and only after consulting an experienced electrical contractor and the local utility company's engineering department.


Although the addition of transient protection to an ac feed is vital to the long-term survival of the equipment downstream, the action of surge-suppression devices can cause one or more of the fuses at the service-drop transformer to open, creating a *single-phasing* condition. Positive protection against continued operation under such a condition is necessary if transient-protection devices are installed at the service entrance of a facility.

Protection-device failure is rare, but it can occur, causing damage to the system unless the consequences of the failure are taken into account. Before installing a surge-limiting device, examine what would happen if the device failed in a short circuit (which is generally the case).

Check for proper fusing on the protected lines, and locate transient-limiting devices in sealed enclosures to prevent damage to other equipment or injury to people if a device failure occurs.


In the failure mode, current through the protection device is limited only by the source impedance. High currents can cause the internal elements of the device to melt and to result eventually in an open circuit. However, the high currents often cause the component package to rupture, expelling package material in both solid and gaseous forms.

A transient suppressor must be fused if the line on which it is operating has a circuit breaker (or fuse) rating beyond the point that would provide protection against package rupture of the suppressor. Selecting the fuse is a complicated

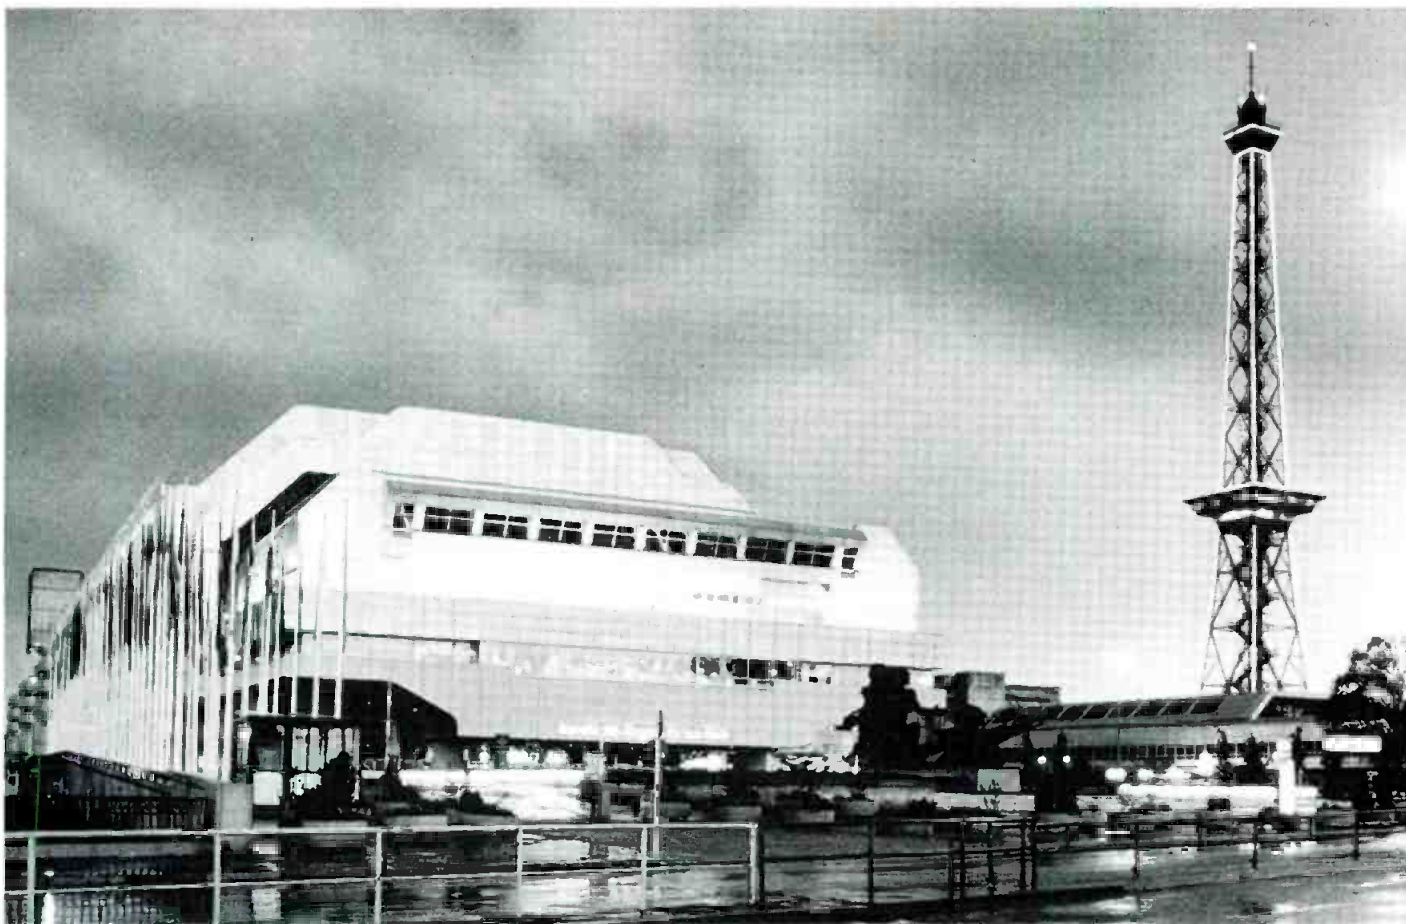

On the Air with AEG.

First-class technological achievements are a tradition at AEG. These successes are based on well-founded experience, since AEG can look back on 80 years of proven transmitter design experience. Moreover, AEG has been building broadcasting transmitters since 1923, and today it is one of the leading manufacturers offering innovative expertise in broadcasting.

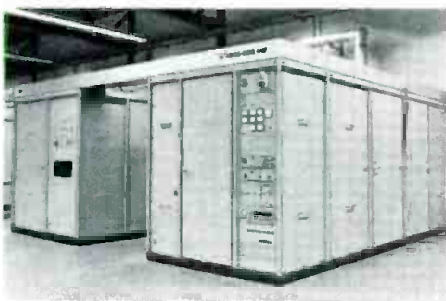

Modern high-power transmitters with ratings from 100 to 600 kW, a new program of long, medium and short wave broadcasting transmitters and more than 80 Pantel transmitters throughout the globe represent ultra-modern engineering perfection. Pantel is a PDM method of modulation having high overall efficiency. Significant savings of energy are achieved by using DAM (dynamically controlled amplitude modulation) conveniently applicable to Pantel transmitters. AEG supplies on a turn-key basis complete broadcast transmitting stations that guarantee high operational reliability, economic operation and long life. Further advantages are full remote-control facilities suitable for unattended operation, and compact mechanical design. In addition to the high-power transmitters, AEG also supplies complete broadcast transmitting stations for VHF FM and Band IV/V television including suitable antenna systems satisfying all directivity and gain requirements. Of course, maintenance and thorough technical training by experts are considered natural elements of the total AEG service.

AEG Aktiengesellschaft
Kommunikationstechnik
Sickingenstrasse 20-28
D-1000 Berlin 21
Telephone: (030) 34 63-0
Telex: 181819
Telefax: (030) 34 63 2419

Please send me further information on high-power transmitters from AEG:

Name _____

Company _____

Address _____

K1 WAK 3742 E

AEG

Circle (43) on Reply Card

www.americanradiohistory.com

procedure involving an analysis of the transient energy that must be suppressed, the rupture current rating of the suppressor and the time delay of the fuse. Transient-suppressor manufacturers can provide guidance on fuse selection.

The monitoring circuit shown in Figure 15 can be used to alert maintenance personnel to an open fuse. This provision is important for continued safe operation of sensitive load equipment.

Lead length is another important factor to consider when installing surge-suppression components. Use heavy, solid wire (such as No. 12 of minimum length) to connect protection devices to the ac lines. Avoid sharp bends. If possible, maintain a minimum bending radius of eight inches for interconnecting wires. Long leads act as inductors in the presence of high-frequency transients and as resistors when high-current surges are being clamped.

Give careful attention to proper heat-sink design when installing transient-suppression devices. Some suppressors require an external heat-sink to meet their published specifications. Failure to provide an adequate heat-sink can result in premature device failure.

Spike-suppression components fail when subjected to transients beyond their peak current/energy ratings. They also can fail when operated at steady-state voltages beyond their recommended values.

Examine the manufacturer's product literature for each discrete protection device that you are considering. Many com-

panies have applications engineering departments that can assist in matching their product lines to your needs.

Consider using hybrid protection devices that provide increased product lifetime. For example, a varistor normally exhibits some leakage current. This leakage can lead to device heating and eventual failure. Hybrid devices are available that combine a varistor with a gas-filled spark-gap device to hold the leakage current to zero during standby operation, extending the expected product lifetime. During a transient, the spark gap fires and the varistor clamps the pulse in the normal way. (See Figure 16.)

Utility-company interfacing

Most utility-company connections in the United States are the standard *Delta-Wye* type, as shown in Figure 17. This transformer arrangement usually is connected with the Delta side facing the high voltage and the Wye side facing the load. This arrangement provides good isolation of the load from the utility and retards the transmission of transients from the primary to the secondary. The individual 3-phase loads are denoted by Z1, Z2 and Z3. They carry load currents as shown.

When using a Wye-connected system, it is important that the building's neutral lead be connected to the midpoint of the transformer windings. The neutral line provides a path for the removal of harmonic currents that may be generated in the system because of rectification of the secondary voltages.

Some utility connections, however, use the *Open-Delta* arrangement shown in Figure 18. Customers often encounter problems when operating a sensitive 3-phase load from such a connection because of the system's poor voltage-regulation characteristics during varying load conditions. The Open-Delta configuration also is subject to high third-harmonic content and transient propagation. The three loads and their respective load currents are shown in the diagram.

Other primary power connection arrangements are possible, such as *Wye-to-Wye* or *Delta-to-Delta*. Like the Delta-to-Wye configuration, these systems are not susceptible to the problems that can be experienced with the Open-Delta (or V-V) service.

The Open-Delta system can develop a considerable imbalance between the individual phases in either voltage or phase, or both. Such an occurrence can introduce a strong 120Hz ripple frequency in 3-phase power supplies, which are designed to filter out a 360Hz ripple. The possible effects of this 120Hz ripple include increased noise in the supply and possible damage to protection devices across power-supply chokes.

Depending on the loading of an Open-Delta transformer arrangement, high third-harmonic energy can be transferred to the load, producing transients of up to 300% of the normal voltage. These transients can severely strain rectifiers, capacitors and inductors in the power supply as well as add to the supply's output noise.

Phase-to-phase balance

The phase-to-phase voltage balance of a utility company line is important to a broadcast facility, not only because of the increased power-supply ripple an imbalance may cause, but also because of the heating effects that may result. Even simple 3-phase devices such as motors must be operated from a power line that is well-balanced (preferably within 1%).

Studies have shown that a line imbalance of only 3.5% can produce a 25% increase in the heat generated by a 3-phase motor. A 5% imbalance can cause a 50% increase, which is potentially destructive. Similar heating also can occur in the windings of 3-phase power transformer used in broadcast equipment.

Phase-to-phase voltage balance can be measured accurately over several days with a slow-speed chart recorder. The causes of unbalanced operation usually are large single-phase power users on the 12kV distribution line. Uneven currents through the utility-company power-distribution system will result in uneven line-to-line voltages at the customer's service-drop entrance.

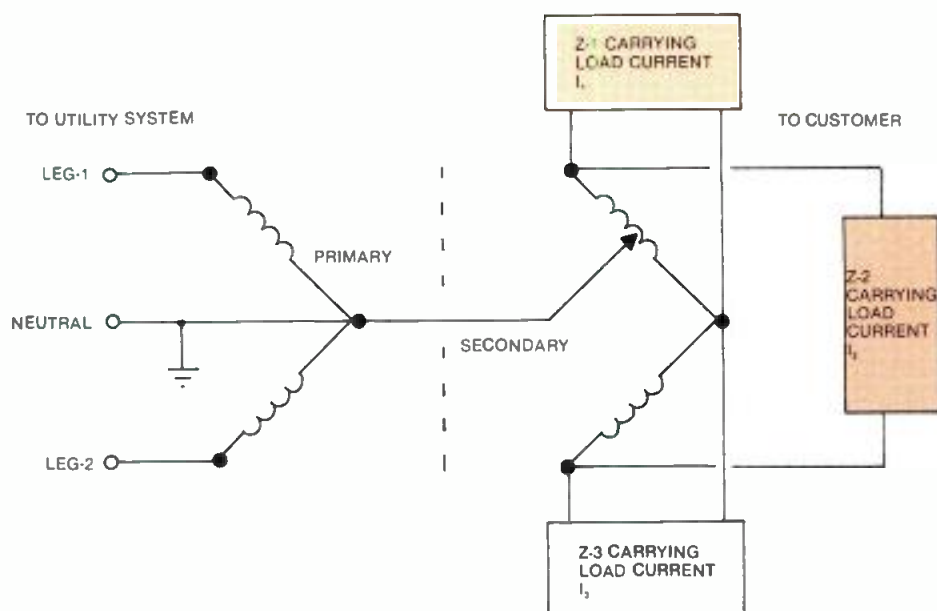


Figure 18. The Open-Delta (or V-V) utility-company service connection. Use of this configuration is not recommended because of the system's poor voltage regulation, high third-harmonic content and transient disturbance propagation characteristics.

Direct-to-Disk™

DIGITAL MULTITRACK RECORDER

Already proven in leading studios throughout the world, the Direct-to-Disk Multitrack Recorder is now available in stand-alone, remote operated 4, 8, and 16-track units.

Powerful new software provides fast, flexible **automated editing** features unavailable with conventional tape-based multitracks, such as individual track offsets, auto fly-ins, and multiple loops on every track.

The terminal screen gives a complete, easy-to-read visual display of all track information.



Using a mouse you identify splice points with microsecond precision on the display, instructing the computer to digitally crossfade from section to section.

Unhappy with that edit? Splice points and crossfade times can be adjusted with **ten microsecond accuracy**. Or you can define a completely different set of edit points.

Because you never disturb your original tracks, Direct-to-Disk editing is completely **non-destructive**. You can construct dozens of different edits from the same material and A/B each one. Bounce again and again with no loss of fidelity.

Even punch-in without erasing. The computer records and logs each move, and can instantly retrieve any pass for comparison.

With Direct-to-Disk, audio information is recorded and stored on a network of reliable, high-speed winchester hard disk drives, which offer not only **superior audio fidelity** and data

integrity compared to tape, but superior performance. And because winchester disks are a **random access medium**, rewind, fast-forward, auto-locate and SMPTE lock are instantaneous.



With variable digital sampling rates of up to **100 kHz, 16-bit resolution**, 0.04% distortion and 96 dB signal-to-noise ratio, Direct-to-Disk offers by far the best fidelity of any multitrack on the market today.

The stand-alone Direct-to-Disk is based on the same hard disk storage and proprietary processing technology that has



made the Synclavier® the industry standard for reliable performance in the studio and on the road. And like the Synclavier, the Direct-to-Disk system is modular and **software updateable**.

As new features become available, you upgrade simply by loading in a floppy disk.



There is only one totally integrated disk-based digital audio recording and editing system for today's music produc-

tion and audio post-production requirements—the Direct-to-Disk Multitrack Recorder.

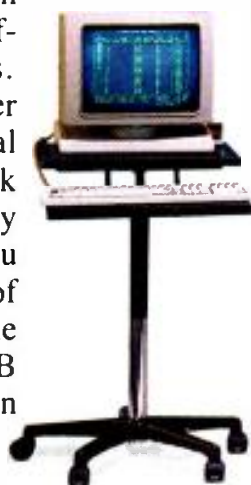

**New England
Digital™**

White River Jet., Vermont 05001
(802)295-5800

NEW ENGLAND DIGITAL OFFICES New York (212) 977-4510 Los Angeles (213) 651-4016 Chicago (312) 266-0266

AUTHORIZED DISTRIBUTORS Nashville (615) 327-4343 Toronto (416) 868-0528 England 44-1-202-3366 France 33-1-48-76-1144 Japan 03-354-3317 West Germany 49-7131-4801

Synclavier, Direct-to-Disk and The Tapeless Studio are trademarks of New England Digital. Product specifications are subject to change without notice. Copyright 1987 New England Digital.

Circle (44) on Reply Card

**SUPER VHS.
A PERFECT FIT...EVERYTIME.**



S-VHS. It's the single system solution so versatile yet so affordable, you can virtually walk through any assignment without the hassle of format switching and equipment changes.

Finding a value-packed solution for a marketplace that demands higher and higher levels of technical performance is actually nothing new for us at JVC. After all, JVC lit the spark that started a video revolution with the development of VHS over a decade ago — and S-VHS is a direct descendant of that proven technology.

With S-VHS, we've taken advantage of all the advances accumulated over the 10 years since JVC first introduced VHS — advances in video heads, video circuitry and video tape — and refined them.

One of the refinements is in the area of resolution. JVC's engineers have designed the S-VHS system to deliver a major increase in resolution — over 400 lines.

In short, when it comes to picture

FINALLY! THE UNIVERSAL FORMAT THAT TAKES YOU FROM ACTION, TO EDITING, TO DUPLICATION WITHOUT MISSING A STEP.



quality, S-VHS is in a class by itself.

Another reason to take a closer look at JVC's S-VHS VCRs is compatibility. You can automatically record and play conventional VHS tapes on S-VHS. That means you can put all the benefits of S-VHS to work for you without going through the work and expense of converting your current VHS tape library.

Plus, S-VHS from JVC stays sharp, generation after generation.

Add it all up, and you'll see that when it comes to giving you straight answers about what S-VHS means to you, there's just one place to call — your S-VHS authority — JVC.

S-VHS from JVC.

The flexible format you can slip right into.

For literature or a demonstration, call toll free: 1-800-JVC-5825.

JVC Professional Products Company,
41 Slater Drive, Elmwood Park, NJ 07407.

JVC

**ALWAYS A STEP AHEAD...
TO KEEP YOU A STEP AHEAD.**

Circle (45) on Reply Card



Circuit-level applications


Equipment reliability can be increased by building transient protection into broadcast hardware.

The design of any piece of electronic equipment is a complicated process that is the domain of design engineers, *not users in the field*. Many manufacturers are now building transient protection into their products. This work is welcomed because effective transient suppression is a *systems problem* that extends from the utility-company ac input to the circuit boards in each piece of equipment. Although progress has been made, more work needs to be accomplished on circuit-level transient suppression.

Case histories

Some low-voltage power supplies used in broadcast equipment are, at best, only adequate. All too often, power to an expensive piece of equipment is derived from a circuit that has virtually no transient overvoltage protection. This type of supply certainly will work, but it falls short of the "state of the art," and is less than the industry should expect from professional equipment.


Figure 19 shows the recommended transient protection for a typical low-voltage series-regulated power supply. MOV1, 2 and 3 clip spikes on the incom-

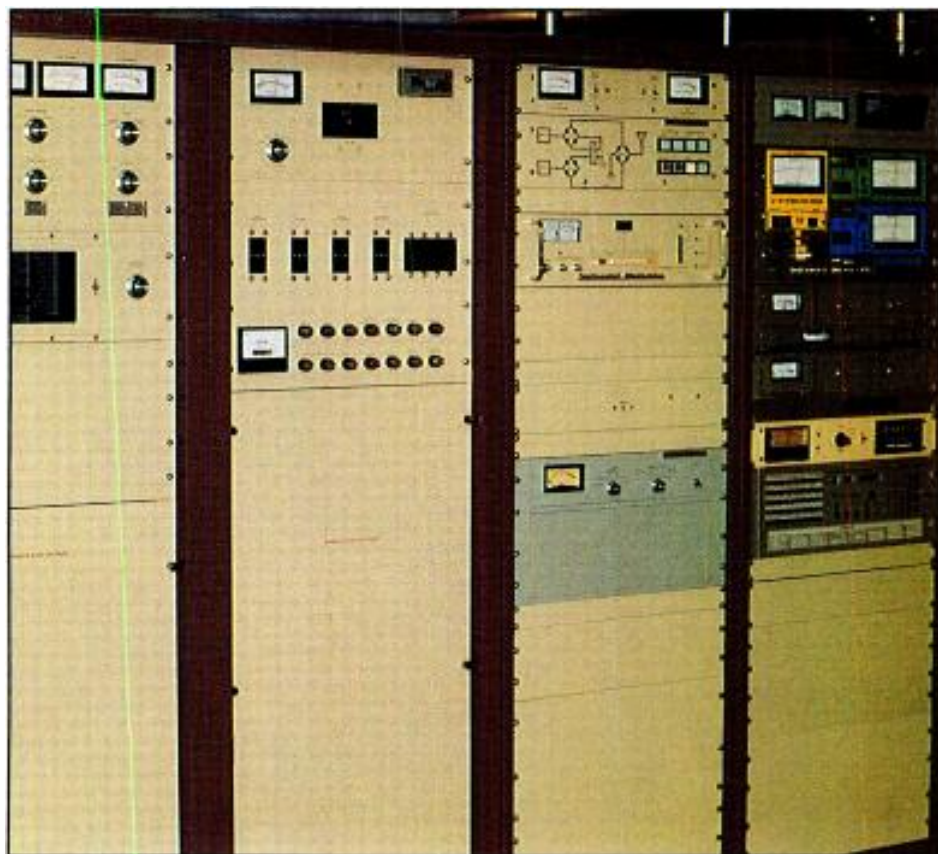

Acknowledgment: The author wishes to thank Roger Block, president of PolyPhaser Corporation, Gardnerville, NV, and Howard Mullinack of Orban Associates, San Francisco, for their help in preparing this report.

They don't make 'em like they used to. And that's probably a good thing! Broadcast equipment today is much more sophisticated than the gear in use 20 or even 10 years ago. This increased sophistication, however, requires a greater level of attention to transient suppression.

Our Real-Time Analyzer is so revolutionary, people spend all day listening to the test signal.

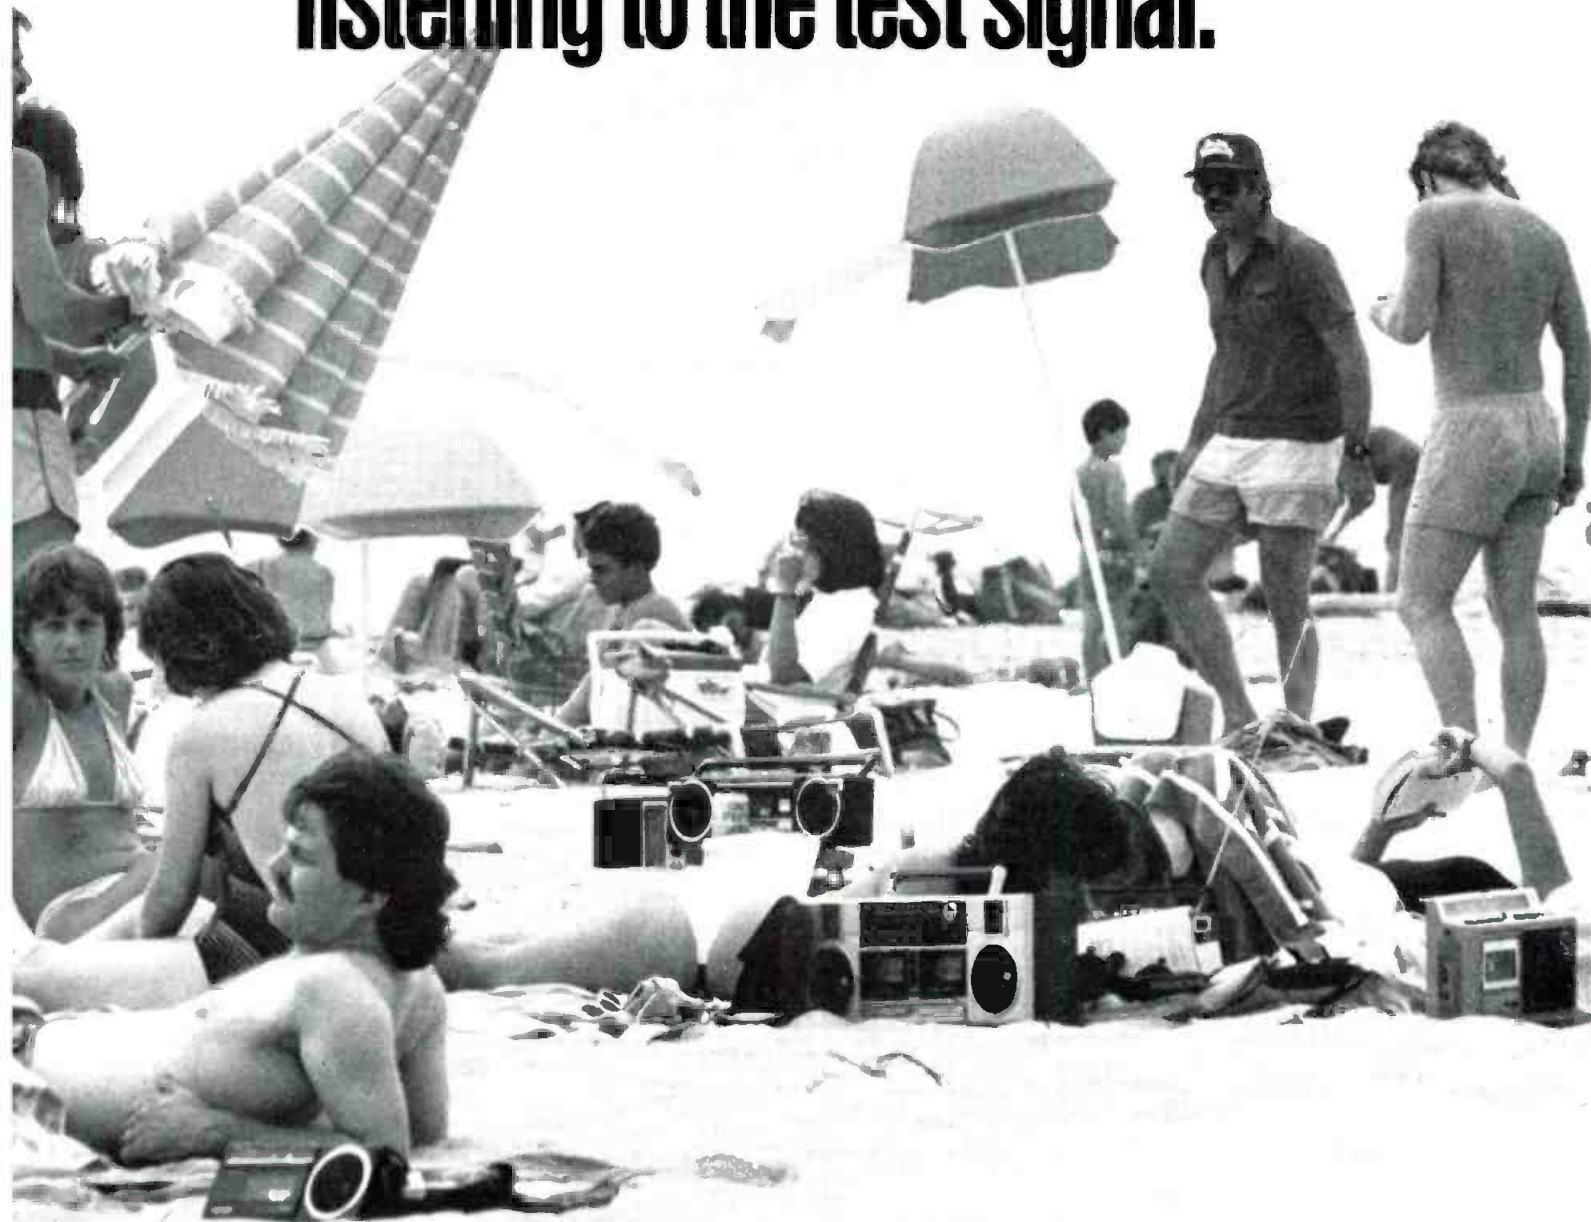

Unlike any other test instrument, the new dbx RTA-1 lets you measure frequency response with actual broadcast programming as the test signal. In depth, in detail, and while you're on the air – not just during costly down time.

In other words, the dbx RTA-1 is capable of telling

you virtually everything you need to know about the frequency response of any transmitter, link, studio equipment, or anything in between. Even if 50,000 people happen to be tuned in.

Use the RTA-1 to see, for the first time, the true effects of signal processing and noise reduction during broadcasting. Pinpoint problem areas and troubleshoot components. You can even use the RTA-1 in monitoring your proof of performance – or anyone else's.

Of course, the RTA-1 has other capabilities too (would you expect any less from the makers of the world's leading signal-processing systems?). You can store, recall and manipulate up to 16 curves. You can hold peaks, isolate 1/3-octave bands, and average program signal over any period. You can even measure the old-fashioned way, using the RTA-1's stereo pink-noise generators. And we should also point out the RTA-1's compatibility with equalizers, PCs, color monitors and printers; its menu-driven microcomputer architecture; its two mike and six line inputs, its preamps, its phantom power supplies.

Call 1-800-525-7000 x D252 for an analysis of our real-time analyzer, including a Broadcaster's Information Packet. In the meantime, you and your listeners can sit back and enjoy the test signal.

A division of BSR NA Ltd., 71 Chapel St., Newton, Mass. 02195

dbx

Circle (48) on Reply Card

NOTES:
1. MOV-1 AND MOV-2 ARE GE MOV #V130LA20B.
2. MOV-3 IS A GE MOV #V62A10.
3. COMPONENT VALUES NOT SHOWN ARE VOLTAGE-DEPENDENT.
TYPES ARE SELECTED ACCORDING TO SYSTEM DESIGN.

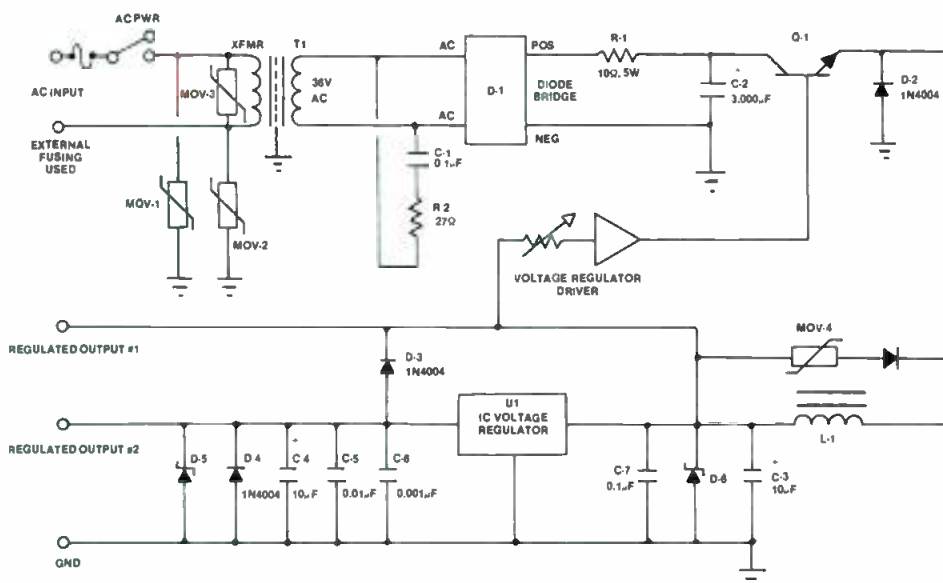


Figure 19. The recommended transient overvoltage protection for a low-voltage power supply. A circuit such as this will survive well in the field despite frequent transient disturbances.

FIGURE (A). RELAY TRANSIENT SUPPRESSION.

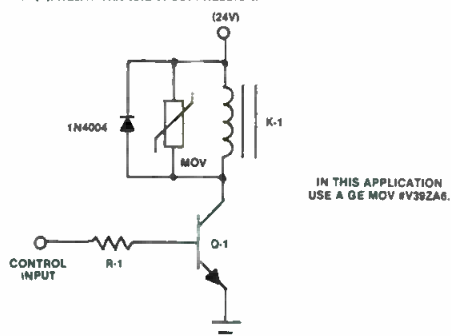


FIGURE (B). SWITCH ARCING SUPPRESSION.




FIGURE (C). SCR TRANSIENT SUPPRESSION.

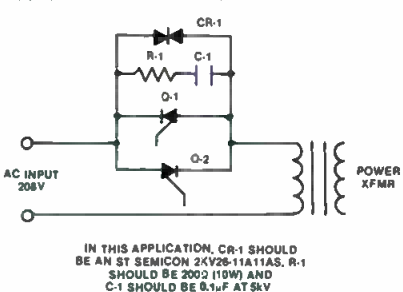


FIGURE (D). TELCO LOOP TRANSIENT CLIPPING.

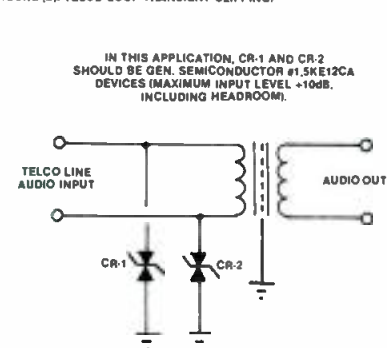


Figure 20. Transient-suppressor applications for several common circuit configurations.

ing ac line, and C1 aids in shunting turn-on, turn-off and fault spikes on the secondary of T1. Resistor R1 protects diode bridge D1 by limiting the amount of current through D1 during turn-on, when

capacitor C2 (the main filter) is fully discharged. MOV4 protects series regulator Q1 and the load from damage because of transients generated by fault conditions and load switching. The varistor is

chosen so that it will conduct current when the voltage across L1 is greater than would be encountered during normal operation. Diode D2 protects Q1 from back-EMF kicks from L1.

Three-terminal integrated-circuit voltage-regulator U1 is protected from excessive back-current because of a short circuit on its input side by diode D3. Capacitors C3, 4, 5, 6 and 7 provide filtering and protect against RF pickup on the supply lines. Diode D4 protects U1 from back-EMF kicks from an inductive load, and zener diode D5 protects the load from excessive voltage in case U1 fails (possibly impressing the full input voltage onto the load). D5 also protects U1 from overvoltages caused by spikes generated through inductive load-switching or fault conditions. D6 performs a similar function for the input side of U1.

Figure 20 shows additional circuit-level applications for transient suppressors. Any transistor that switches an inductive load must be provided with transient protection, as shown in Figure 20(a). Protection also is required for switches that control an appreciable amount of power, as illustrated in Figure 20(b). The use of a spike suppressor across switch or relay contacts will greatly extend the life of the switching elements.

SCR control of the power input to a large transformer is common in transmitter equipment today, and some form of protection is vital to long-term reliability. The surge protector shown in Figure 20(c) will clip spikes generated by the transformer during retarded-phase operation.

Transient suppression often is desirable on telephone company audio or data loops. The spike-clipping devices shown in Figure 20(d) are selected based on the typical audio voltage levels (including headroom) used on the line.

For maximum protection of microcomputer equipment, transient suppression must be designed into individual circuit boards. Figures 21(a) and (b) illustrate typical applications of on-the-board spike suppression. The devices used are General Semiconductor DQA/DQB series DIP TranZorbs. Four individual TranZorb devices are included in each DIP package, making it possible to conveniently place them on crowded printed circuit boards. Figure 21(c) shows an application of transient suppression in a voltage-follower circuit, common in many analog data-acquisition systems. Note the use of suppression devices at the power-supply pins of the circuits shown in Figures 21(a) through (c).

Figure 21(d) illustrates an alternative to the transient-protection arrangement shown in Figure 20(d). The Figure 21 cir-

Continued on page 78

**Announcing the Pro Series
S-VHS video production
system—by any standard
of measurement in
a class by itself.**

Panasonic





The Panasonic Pro Series 400-line high-resolution video production system.

In this S-VHS System, dot interference has been completely eliminated. The luminance and chrominance signals are output separately. This gives S-VHS video signals extremely clear color gradations and truly brilliant colors. All this—without sacrificing upward compatibility with standard VHS.



Improved Cost/Performance.


Equipment:

Upgrade your system even as you cut your costs: lower equipment/operating costs. Higher 400-line resolution.


VCR FORMAT COMPARISON*			
Edit VCR	VHS	3/4	Pro Series
List Price \$	4,400	8,000	5,900
Max Rec Time (Min)	120	60	120
ENG Rec Time (Min)	120	20	120
Tape Cost \$	9	40 Studio 30 ENG	20
Resolution In Color Mode	240 +	260 +	400 +
S/N (In color mode)	45dB +	46dB +	47dB +

System Simplification:

Typical 3/4" 2-hour playback system—costly, complicated components.

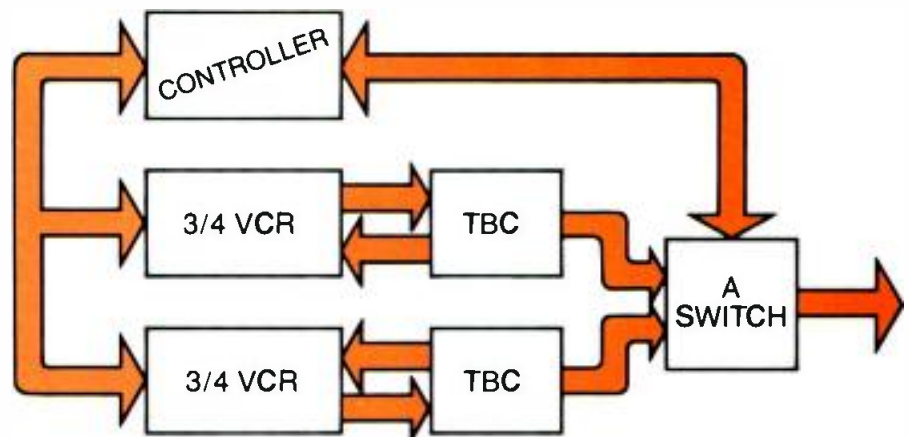


Panasonic Pro-Series S-VHS 2-hour playback system—requires no controller, only 1 TBC, only 1 VCR.

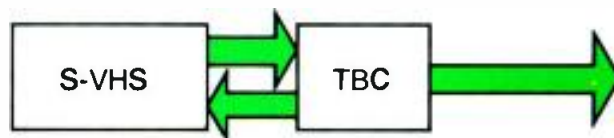

Lower Tape Running Costs:

It takes six 3/4" 20-minute cassettes to equal the ENG recording time of one S-VHS cassette.

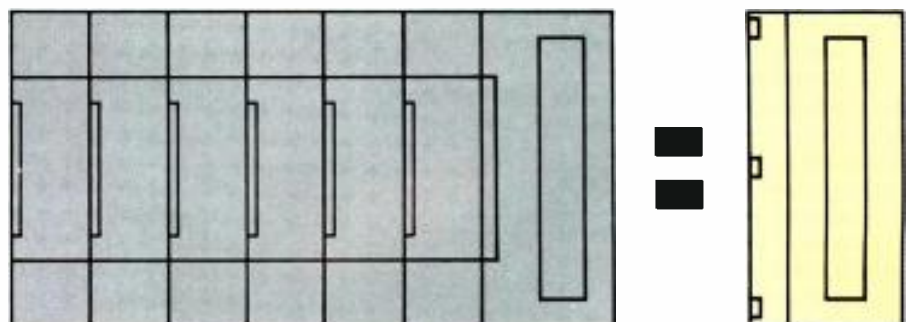

Panasonic
Professional/Industrial Video

*Based on
Panasonic Edit Machines

Call Panasonic Industrial Company at 1-800-553-7222 for more information and the name of your nearest Panasonic Professional/Industrial Video Dealer.

Circle (51) on Reply Card

www.americanradiohistory.com

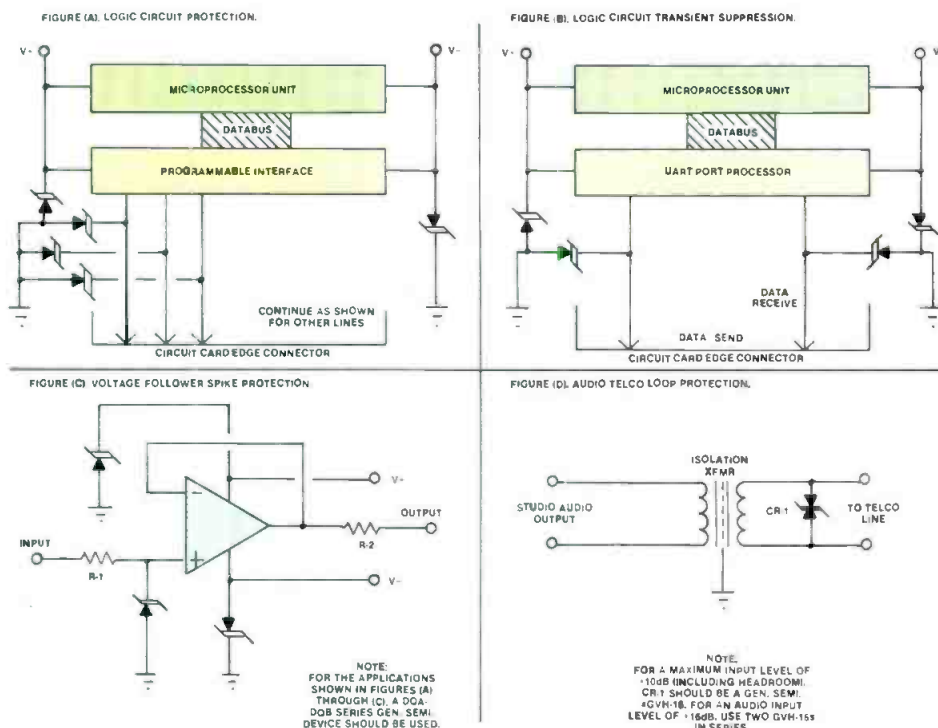


Figure 21. Application of transient-suppression devices to microcomputer, analog voltage sampling and audio circuits.

Continued from page 74

cuit prevents the introduction of noise into high-quality audio program lines because of common-mode imbalances that may result from transient suppressors being tied to ground. The use of a low-capacitance suppressor (as specified) ensures minimum capacitive loading on the telco circuit.

The traditional protection element used for telephone company lines is the *gas tube*, which has been used for many years to replace the older carbon buttons that became noisy with time. The gas tube (and its carbon predecessor) protects central office personnel if a high-voltage power line comes in contact with a telephone cable. Protection of customer equipment is of secondary importance.

For balanced telco lines, critical transient considerations include both the above-ground voltage of the two conductors (the *common-mode voltage*) and the voltage between the two conductors (the *differential-mode voltage*). When individual clamping devices are used on each conductor, as shown in Figure 20(d), one device will inevitably clamp before the other. This action can create a significant

We Guarantee...

We guarantee that our camera tripod plates and VTR/Camera Cables will last longer than other manufacturers'... or we will replace them at No Charge.

ENG crews and maintenance supervisors report that TSM camera tripod plates and VTR/Camera Cables last 2 to 4 times longer than other makes.

Quick Release Tripod Mounts. Rugged, reinforced construction with positive locking... plus extra holes for optimum balance. Models shown are for Ikegami and Sharp cameras. Models for other cameras available soon.

VTR/Camera Cables. Heavy duty *pull, twist* and *bend* strain relief design at connectors. Crews like cable flexibility and long life. Available for Ikegami, RCA, Sharp, Hitachi

and Sony cameras and popular portable VTRS. **Mono-Brace** increases stability when using long focal length or heavy lenses. Perfect prescription for back pain.

Mic and Light Adapters for Ikegami cameras. The TSM-MLA is a simple solution for combo mounting of shotgun mic and light.

BCTV Zoom and Focus Controls. Smooth 2 speed Zoom control clutch prevents end stop damage. Focus control has drag adjustment. Drive cables have dust seals.

Call or write for complete details and inquire about our Warranted Lens Repair service.

TSM

TOTAL SPECTRUM MANUFACTURING INC.

20 Virginia Avenue, West Nyack, NY 10994
(914) 358-8820



INTRODUCING FOTOVIX® PRO


The perfect film video processor for video and broadcast production, law enforcement and security work, fire departments, laboratories, medical, publishing, newspapers, advertising and public relations, education, sales training, real estate, used car and boat sales, etc.

Flexible—Handles negative (generates positive image) and positive film, color and black-and-white.

Quick and easy—To set up and view the image all you need is a monitor or TV set. Just hook up Fotovix and you're ready to go.

Manipulate the image—Zoom in up to 6X and use the Fotovix Editor to crop the image to see only what interests you. Use the built-in pointer to key in on important details. Discover details you may not have known existed.

Color correct—Adjust color and brightness to view the image with greater clarity.

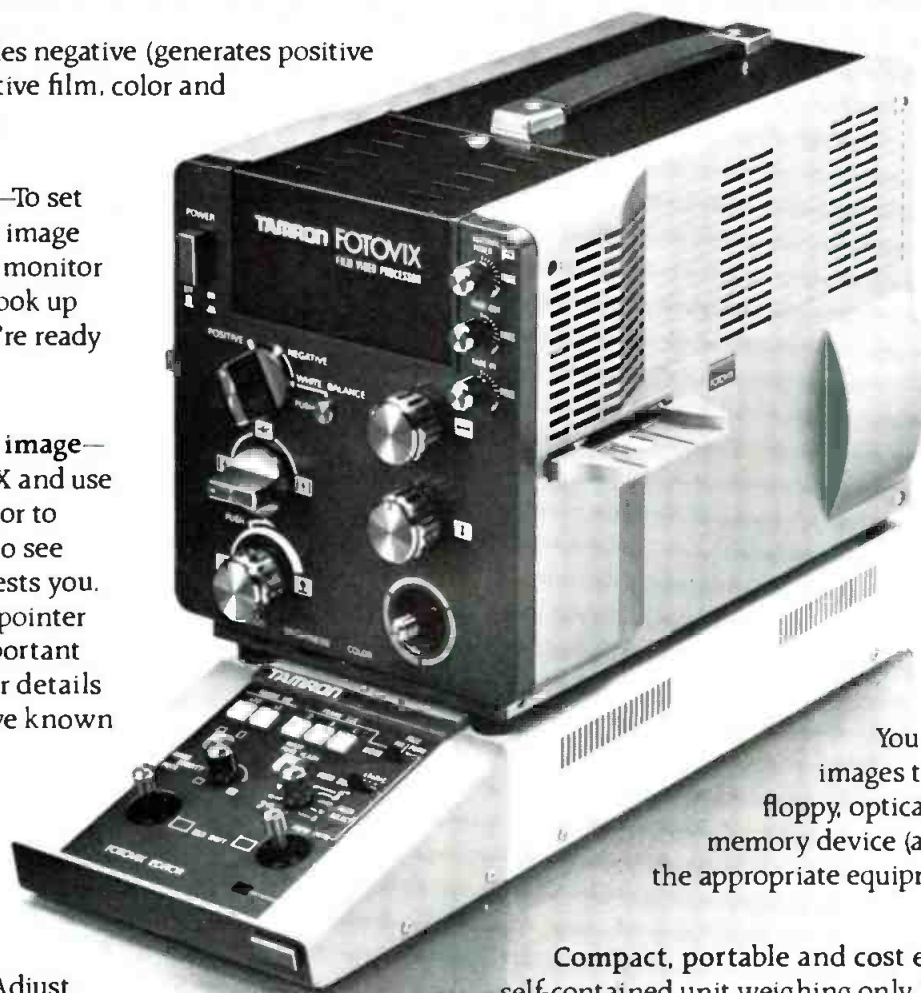

Genlock—Fotovix Pro's Genlock capability lets you integrate and review multiple images on a single monitor by use of an SEG (Special Effect Generator) or a switcher.

Instant proof prints—Just add a video printer and make color or black-and-white prints of what is on the monitor. Perfect for making on-the-spot records for review or distribution.

Easy image storage—You can easily transfer Fotovix images to videotape, still video floppy, optical laser disc or computer memory device (after digitizing) by adding the appropriate equipment.

Compact, portable and cost effective—Fotovix is a neat, self-contained unit weighing only 13 pounds that can be easily carried and installed anywhere. Nothing else available anywhere near the price offers Fotovix' level of image quality and versatility.

**TAMRON®
FOTOVIX® PRO**

differential voltage that can damage sensitive equipment on the telco line.

The best solution is to install a 3-element gas tube. The device has a common gas chamber with two gaps, one on each side of the grounded electrode. When one side of the line reaches the ionization potential, both sides fire simultaneously to ground.

Figure 22 illustrates the application of device staging to a broadcast transmitter

high-voltage power supply. As detailed previously for line-voltage ac distribution systems, the staging approach uses the series resistance and inductance of interconnecting wiring to assist in suppressing transient disturbances. The Figure 22 circuit includes two sets of varistors, primary and secondary units. The secondary set is rated for a lower clamp voltage, and, together the varistor groups exercise tight control over dis-

turbances entering the transmitter from the ac utility company input.

Additional transient-suppression devices (CR1 through CR3) and three sets of RC snubbers (R1/C1 through R3/C3) clip transients generated by the power transformer during retarded-phase operation. On the transformer secondary, three groups of RC snubbers (R4/C4a-b through R6/C6a-b) provide additional protection to the load from turn-on/turn-off spikes and transient disturbances on the utility line.

The transient-suppression applications presented here are intended only as examples of ways to build protection into equipment to increase reliability. *Do not attempt to modify existing equipment to provide increased transient-suppression capabilities.* Such work is the domain of the equipment manufacturer. Transient suppression must be engineered into products during design and construction, not added on later in the field.

Device application problems

Building transient-suppression capability into a product is not as easy or straightforward as it might appear. Misapplication of a suppressor can *reduce* equipment reliability, not increase it.

For example, Figure 23 shows two transient-suppression arrangements that should be avoided. In 23(a) the relay contacts of K1 are protected by three spike suppressors. Although this is an acceptable application of the devices, the possibility of suppressor failure always must be considered. The usual failure mode is a short circuit. This being the case, a failure of any two of the three devices shown will cause a single-phasing condition, probably damaging the motor.

A better arrangement is shown in Figure 23(b). Device failure in this configuration will open the circuit breaker, shutting down the system but not destroying the motor. Figure 23(c) shows what appears to be a safe application of a surge suppressor, but when power is applied, the filament transformer-Variac combination can generate turn-on spikes that appear "amplified" at the primary of the Variac because of the step-up action from the secondary to the primary. With the filtering resistors and inductors in the line, the primary will ring at point "A" from the spikes generated in the secondary. Depending on the component values involved, CR1 could be destroyed by these normally occurring transients. An appropriate location for CR1 is shown in Figure 23(d).

Another example of an inappropriate transient-suppression application is shown in Figure 24. Diagram 24(a) shows a protection device placed across the high-voltage-on button of a broadcast

WE HAVE SOME OF THE BEST CONNECTIONS IN THE COMMUNICATIONS BUSINESS

If you're in the telecommunications, audio or video broadcast industry, you should get to know Trimm. We have a complete line of audio telephone jacks, plugs, jack panels, patch cords, terminal blocks, as well as a broad line of coaxial jacks, plugs, fuse panels and related components.

Connect up with Trimm. Call or write for our catalog.




TRIMM INC.

A DIVISION OF NEWTON INSTRUMENT COMPANY

400 West Lake St., P.O. Box 489, Libertyville, Illinois 60048
Phone 312-362-3700, Telex 728452, Fax 312-680-3888

Circle (61) on Reply Card

LENCODE

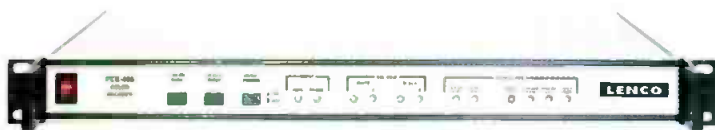

PCE-466
Professional broadcast quality encoder.



CCE-850
Self-contained utility encoder.



PCD-473
State-of-the-art professional broadcast decoder.



EN-15
Perfect for CGA card output VCR recording. PC type encoder board.



EN-10
Designed to work with graphics boards outputting analog RGB. Requires external sync generator.




DC-20
PC type decoder board.

The word for high-performance studio and computer resident encoders and decoders. For RGB to recordable NTSC composite video...Lencode it!

The Lencoders, from Lenco. Pioneers in state-of-the-art encoding technology since 1973, and still on the cutting edge of innovation.

Lencoder. Get the word.
Write or call today for detailed information and prices.

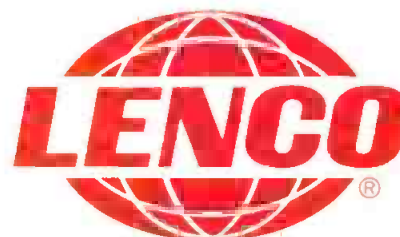

300 N. Maryland St.
Jackson, MO 63755 U.S.A.
Phone: 314-243-3147
FAX: 314-243-7122
Telex No: 910-760-1382

Circle (54) on Reply Card

www.americanradiohistory.com

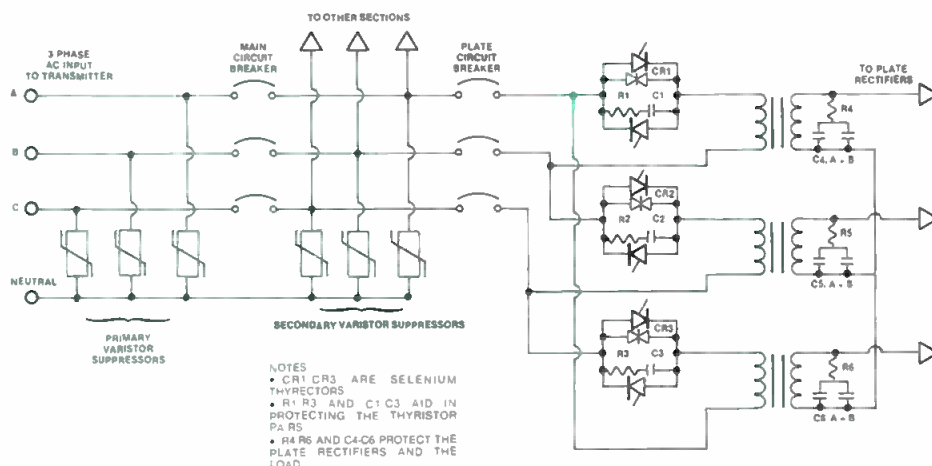


Figure 22. The use of ac system series inductance and resistance to aid transient suppressors in controlling line disturbances in a broadcast transmitter high-voltage power supply.

transmitter. Although this arrangement will extend the life of the switch contacts (especially if the button is switching 120Vac or 208Vac), failure of the device could prevent the transmitter high-voltage supply from being turned off in the event of an overload. Serious equipment

damage could result. Figure 24(b) shows a preferable transient-suppression arrangement, in which the protection device is placed across the relay coil. Failure of the device in this configuration would shut down the transmitter and prevent any further damage.

It is important to choose the correct application of a transient-suppression device and to select one capable of carrying the transient energy that will be present in the circuit as well. This point is illustrated by the application shown in Figure 20(d) for telco audio or data loops. In the circuit, two General Semiconductor No. 1.5E12CA protection devices are tied between ground and the telco loop. The devices used will clip at about +20dBm, more than the maximum audio level expected on the line.

In an actual application of several pairs of these devices, however, it was found that, after several months of service, some of the suppressors began to fail. Those failures surfaced because of continual overstressing of the components caused by telephone company fault conditions. Voltages normally used in the dial-up telco network typically run about -48V and could destroy the specified protection devices, depending on where the crossed lines occurred. The symptom noticed on the telco loops was increased noise, a result of the unbalanced condition created by the failure (in a short-circuit mode) of one of the transient suppressors.



DPS-185 Test Signal Generator

The DPS-185 meets the requirement of providing 32 selectable test signals on two independent channels at a reasonable price. Seven-segment digital displays permit easy recognition of the signals generated. The DPS-185 is a price/performance breakthrough in a single, space-saving rack unit. This rugged, compact test generator simplifies maintenance, alignment and service procedures.

120 Middlefield Road, Scarborough, Ontario
Canada M1S 4M6 (416) 299-6888 Telex 065-25344

- Thirty-two test signals
- Two independent outputs per channel
- Seven auxiliary outputs
- Genlockable
- RS-170A specs
- Dedicated color black outputs

**Scientific
Atlanta**

Digital Video Systems Division

Circle (46) on Reply Card

Mica Capacitors

LARGE STOCK


VACUUM CAPACITORS

JENNINGS

SURCOM ASSOCIATES, INC.

305 Wisconsin Avenue
Oceanside, California 92054
(619) 722-6162

Circle (47) on Reply Card

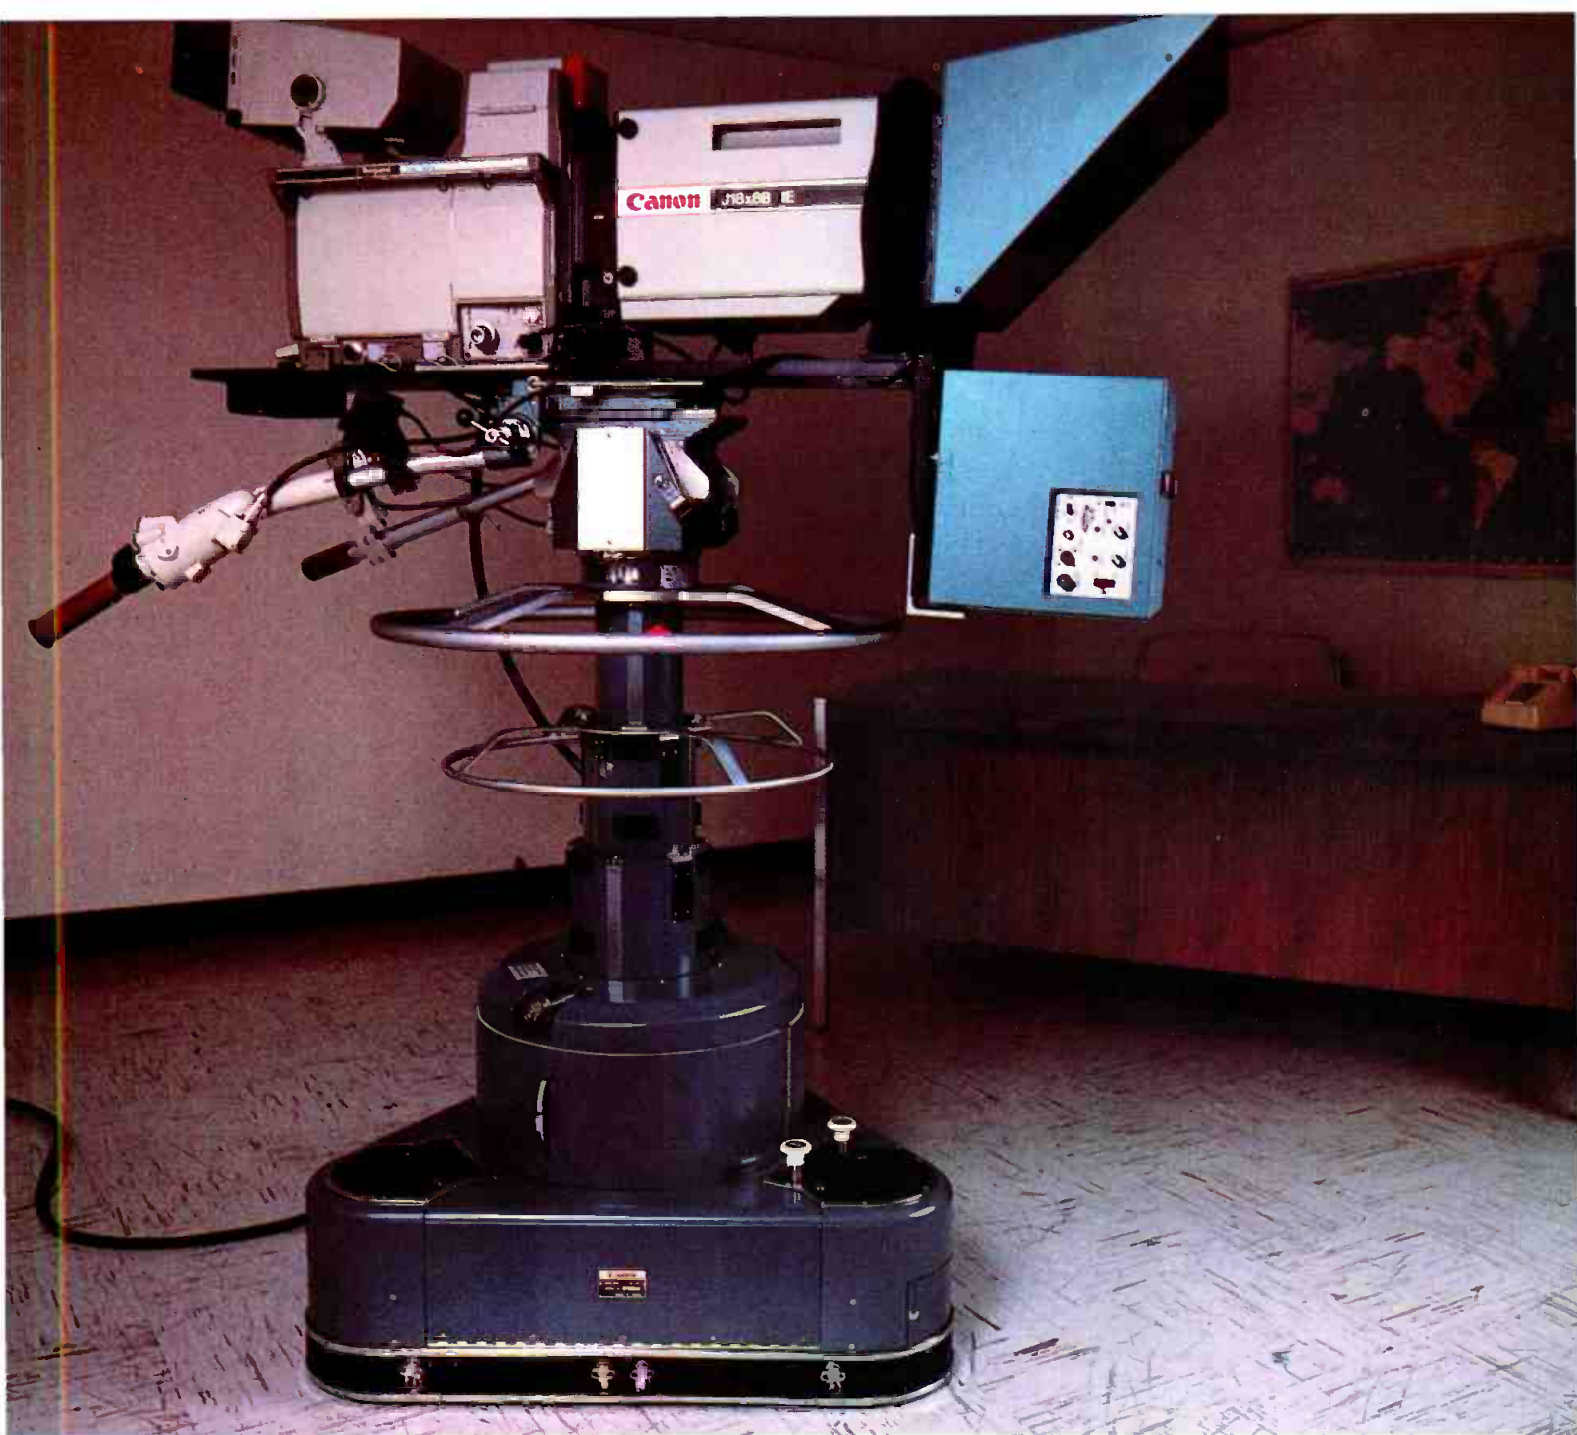

Canon Puts You on a Pedestal

Canon professional support equipment is right at home in the world's most sophisticated studios. Finely finished, rugged and sturdy, yet designed for fluidity of movement, the Canon MC-200 and MC-300 pedestals can handle any camera/lens combination—teleprompters, too!

Canon pedestals are counterbalanced with unique energy cassettes that make set-up a breeze and eliminate the frequent adjustments and servicing necessary with systems dependent on compressed

gas. Their very short mounting height enhances low-angle shooting, and they offer the flexibility of 23-60 inch elevations.

Find out more about the quality and value in the entire line of Canon support equipment, including tripods and cam heads. All are sold, backed and serviced by the same people that made Canon the number one name in broadcast lenses. When we offer to put you on a pedestal, it's not a lot of hot air!

Canon

Optics Division

Canon USA, Inc., Head Office: One Jericho Plaza, Jericho, NY 11753 (516) 933-6300. Dallas Office: 3200 Regent Blvd., Irving, TX 75063 (214) 830-9600
Chicago Office: 100 Park Blvd., Itasca, IL 60143 (312) 250-6200. West Coast Office: 123 Paulmarino Avenue East, Costa Mesa, CA 92626 (714) 979-6000
Canon Canada, Inc., 6390 Dixie Road, Mississauga, Ontario L5T1P7, Canada (416) 678-2730

© 1987 Canon USA, Inc.

Canon
LENS 123456 7
CANON USA
Financing is available through
with the Canon Credit Card. For details
on purchasing Canon devices and services
Available only in U.S.

Circle (56) on Reply Card

www.americanradiohistory.com

FIGURE (A). APPLICATION NOT RECOMMENDED.

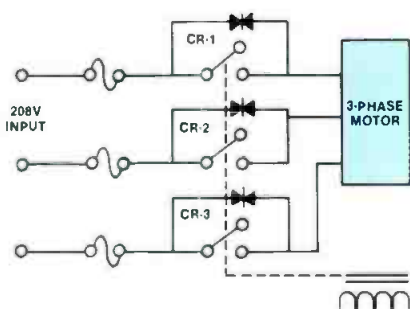


FIGURE (B). RECOMMENDED APPLICATION.

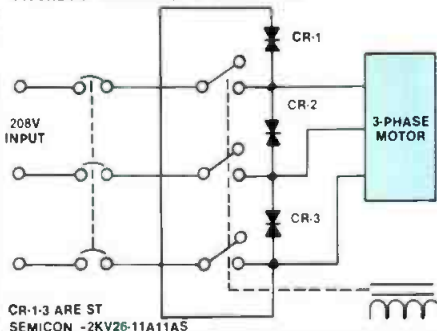


FIGURE (C). APPLICATION NOT RECOMMENDED.

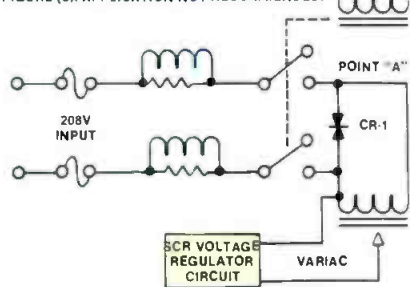


FIGURE (D). RECOMMENDED APPLICATION

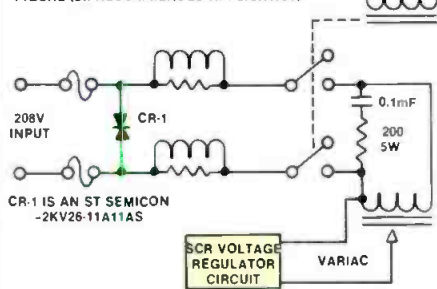


Figure 23. Transient-suppression circuit arrangements that should be avoided (a) and (c), and the alternate configurations that provide fail-safe operation (b) and (d). The application of any transient-suppression component must be considered carefully, keeping in mind the various modes of operation and the possibility of protection-device failure.

sors between a given line and ground.

The problem in this application was not with the protection device, but with the telephone company, which repeatedly crossed dial-up network voltages onto audio loops. In light of this situation, the dissipation rating of the protection device must be increased to deal with the failure modes that were observed to occur at the facility.

Plan ahead

Transient disturbances are a fact of life. The power quality in the United States is not improving. With increased loading and diminished reserves in some areas, it is becoming worse. Broadcasters will have to pay the bill for transient disturbances one way or the other—either for protection hardware or for equipment maintenance after the fact.

There is nothing magical about effective transient suppression. Disturbances on the ac line can be suppressed if the protection method applied has been designed carefully and installed properly. Whether the protection method your station chooses involves a systems approach or discrete devices at key points

See the best.



Hear the best.

HOTRONIC AF 72 Frame Synchronizer with

- 16 bit automatic matching digital stereo or monaural audio delay
- Accepts the overwhelming noisy satellite feed
- Full bandwidth freeze field/freeze frame (field 1 or 2 selectable) and freeze 2 frames for perfect image

... And detailed technical specifications are available.

Sheer perfection of the broadcast image through technological innovation and sophistication. Supreme quality and value priced substantially below the competition.



HOTRONIC, INC.
1875 S. Winchester Blvd.
Campbell, CA 95008 408/378-3883

AMBER

Your TOTAL SOLUTION for Automated Audio Testing



Amber offers the only GPIB based total automated test system package for audio, broadcast and communications testing. The package includes the Amber model 5500, a GPIB Programmable Audio Measurement System with state-of-the-art performance, comprehensive measurement capability, fast operation and modular expansion. Amber AudioCheck™ software runs on any IBM XT/AT compatible computer and can program complete sequences of tests including sweeps, testing against limits, control of other GPIB instruments, storage and retrieval of tests and data and output of hard copy on printers and plotters.

A fully professional system, the Amber 5500 has stereo balanced inputs and outputs and "16-bit digital" performance (distortion to below 0.001% / -100dB, noise below -120dBm/1μV). The 5500 is comprehensive — it can measure THD + N, two kinds of IMD, quantizing distortion, wide band and narrow band level with four selectable bandwidths, crosstalk, frequency and phase. Other options add even more capability. An easy to use smart front panel and non-volatile memory for instrument setups facilitate bench-top operation. A wide selection of noise weighting filters and detectors allows measurement to virtu-

ally any standard including ANSI, DIN, CCIR, IEEE and others.


The Amber system is fast. Fast to set up and fast to run. Complex test sequences can be programmed in just minutes using the easy to use AudioCheck™ software program. Intuitive pop-up menus with simple keyboard or mouse selection, resident sample files and context sensitive help screens take the expense and risk out of custom programming. Whether its a sophisticated family of curves for R & D purposes, a complex product test procedure or a simple Go/No-Go acceptance test, technicians not familiar with programming can be in business just hours after installation.

AudioCheck™ offers unparalleled flexibility in screen and hard copy output. Text, user prompts, bar graphs,



Amber also makes one of the most popular portable high performance audio measurement systems — the 3501. Half the weight and size of comparable instruments, the 3501 has one of the best reliability records in the industry and was the recent winner of a US Navy requirement for over 400 instruments.

DEMO DISK AVAILABLE An AudioCheck™ demonstration disk and manual with all features except GPIB commands are available for your evaluation. System requirements: MS-DOS computer with 640k RAM and CGA monitor card. Send \$10 for your copy.

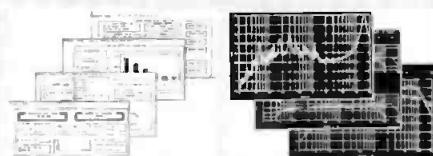

XY graphs and messages can be intermixed. Hard copy reports on dot matrix printers or multi-color pen plotters can incorporate all of these attributes. Linear and log sweeps with easy selection of range and parameters, even sophisticated asynchronous, reciprocal and adaptive sweeps with complex settling algorithms are just a few keystrokes.

The Amber system uses universal standards such as IEEE-488 and MS-DOS. You can easily integrate other GPIB instruments into the system like RF generators, programmable power supplies, switch matrices, digital multimeters and function generators (although you'll find the modular and expandable 5500 remarkably complete by itself). Your test data is saved on disk in industry standard formats for easy export to your data base, spread sheet, statistical analysis and scientific analysis programs.

Let us show you how easy and powerful the Amber Total Solution is. Call or write for our brochure.

Amber Electro Design Inc.
4810 Jean Talon West
Montreal Canada H4P 2N5
Telephone (514) 735 4105
Telex 05-827598
US Toll free 800-361 3697

amber

Now get the same
service and equipment
on this coast...



as you do on this coast.



East Coast or West Coast. Now the same complete selection of sophisticated video equipment you've come to expect from Camera Mart/New York is yours to rent or buy from CMTV/Burbank.

The same great service, too. So now, you can have the best of both coasts.

*We've been big in video since
it was small.*

The Camera Mart, Inc.
SALES • SERVICE • RENTAL

456 West 55th St. NY 10019
(212) 757-6977 Telex: 275619/FAX (212) 582-2498
1900 W. Burbank Blvd., Burbank, CA 91506 (818) 843-6644

Circle (37) on Reply Card

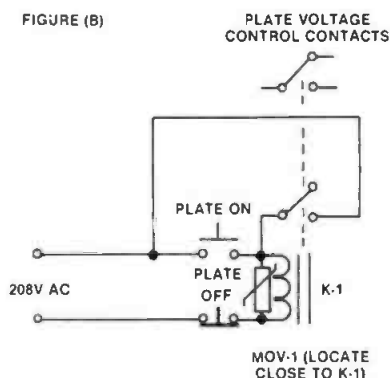
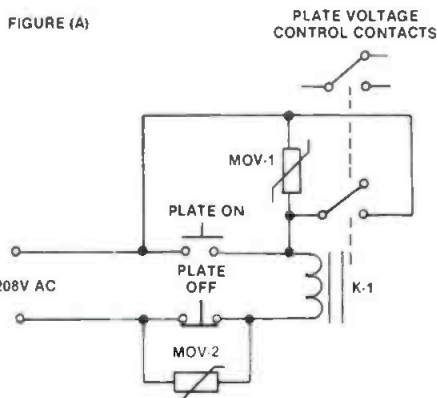


Figure 24. A transient-suppressor application that should be avoided (a), and the proper method (b) of suppressing switch contact arcing in a transmitter control system. In any application, the consequences of protection-device failure (generally in a short circuit) must be considered.

in the broadcast plant, the time and money spent incorporating protection into your facility will yield a good return on investment.

Bibliography

1. Hill, Mark. "Computer Power Protection." *Broadcast Engineering*, April 1987.
2. Block, Roger. "How to Ground Guy Anchors and Install Bulkhead Panels." *Mobile Radio Technology*, February 1986.

3. Mullinack, Howard G. "Grounding for Safety and Performance," October 1986.
4. EEV. "EMP Protection Device Applications Handbook."
5. Harris Corporation. "The Susceptibility of the Open Delta Connection to Third Harmonic Disturbances."
6. Block, Roger. "The Grounds for Lightning and EMP Protection." PolyPhaser Corporation, Gardnerville, NV.
7. Key, Lt. Thomas. "The Effects of Power Disturbances on Computer Operation." IEEE Industrial and Commercial Power Systems, conference paper, Cincinnati, OH, June 7, 1978.

Hear the great wireless sound.

Consider the size
advantages...

Cetec Vega's R-33 PRO PLUS wireless microphone receiver mounts inconspicuously on a camera. Or on a tiny corner of your sound cart. Or in your pocket. Or on your belt, providing you with program-quality headset audio.

With the R-33 you have a wide choice of transmitters...any Cetec Vega DYNEX® II bodypack or handheld. A full complement of useful accessories is included.

The R-33 provides 8 hours of operation on a single 9-volt battery. Audio is studio-quality (e.g., over 100 dB S/N).

All this, in a rugged package less than 12 ounces, and only 3/4 x 3-1/4 x 5-5/8 inches (HWD). Available in two colors... PRO Brown/Cream or Camera Black.

Cetec Vega

...the professional's wireless
9900 Baldwin Place
El Monte, CA 91731-2204
(818) 442-0782

Circle (62) on Reply Card

2

The commission is watching

By Brad Dick, radio technical editor

Fewer regulations may mean tougher enforcement.

"Hi, I'm from the FCC and I'm here to help you."

FCC engineers probably don't greet station engineers and managers quite this way, but in this era of relaxed restrictions, it doesn't seem as far-fetched as it once might have. With deregulation, unregulation or reregulation (whatever you want to call it), the commission has assumed a quieter role. Of course there are rules to be followed, but far fewer than before. The number of field inspections also has been greatly reduced. However, some stations have found out the hard way that inspections still take place, and

violations still bring fines.

Out with the old

The relaxation of regulations, which means fewer logging and inspection requirements, has caught some stations off guard. Many smaller stations no longer have full-time engineers. Consequently, a potentially troublesome technical matter might go unnoticed and eventually wind up as a problem that results in a violation notice. Even larger stations are not immune to the long arm of the commission.

The reduction of logging and inspection requirements is generally welcomed

by the industry. Logs, for the most part, are a thing of the past. The required technical inspection is another task that engineers aren't sorry to see eliminated. Many of the deregulatory changes are simply reflections of modern technology. When was the last time your FM transmitter drifted in frequency by more than 100Hz? How about the transmitter power level? Is it automatically controlled? Today's equipment is just more stable and reliable than when many of the old rules were implemented.

Even so, stations must continue to meet the remaining applicable FCC requirements. One drawback to fewer regulations seems to be that the commission is now strongly enforcing the remaining ones. The emphasis is on compliance. It is more important than ever to know the rules and to follow them carefully.

A matter of policy

To stress the importance of following the rules still in effect, the commission issued a memorandum in December 1985 that outlines a basic policy for field offices in the issuance of violation notices. The policy also suggests specific fines for certain violations.

The memorandum outlines a tiered enforcement program for rule violation of Parts 73 and 74. Under the policy, a *notice of radio station conditions* (FCC form 790) is issued for minor technical matters. This first-level notification concerns

TABLE 1. SAFETY VIOLATIONS

1. All tower lights out, FAA not notified within 30 minutes as required. 17.56, 17.48, 73.1213 (\$2,000)
2. Majority of tower lights out and/or loss of top flashing beacon, FAA not notified within 30 minutes. 17.56, 17.48, 73.1213 (\$1,000)
3. Tower lights not observed at least once each 24 hours. 17.47, 73.1213 (\$500)
4. Temporary warning lights not present/operational during construction. 17.45, 73.1213 (\$1,000)
5. Tower not properly painted, e.g. not the required color bands. 17.50, 73.1213 (\$750)
6. High RF voltage at antenna base, hot base at antenna towers not enclosed, damaged fence allowing entry. 73.49 (\$1,000)
7. High-voltage equipment not protected so as to prevent injury to operating personnel, damaged interlock, exposed wiring. 73.49, 73.317(b) (\$750)
8. Failure to conduct EBS tests. 73.961 (\$300)
9. EBS monitor receiver and/or tone generator not operational or not installed. 73.932 (\$1,000)

infractions that are not as serious as rule violations, but are likely to become violations or cause problems if left uncorrected. A notice also can be issued for minor technical rule violations that have little potential for adverse effects on others or on signal quality. No licensee response is required for this notification.

The second, and more serious, level is the *official notice of violation* (FCC form 793). This notification requires a response from the licensee. It may be issued when the technical violations are more serious than those for which a form

790 would be issued, but are not specifically designated in the policy statement and do not fall under the general categories of safety, interference-harm actual/potential or service quality violations. A notice of violation also can be issued for other specific technical rule violations designated by the mass media bureau.

The third, and most serious, notification level is the *notice of apparent liability* (NAL). This notice is issued for the willful or repeated violation of:

- Specific technical rules detailed in the

memorandum.

- Technical rule violations more serious than would be appropriate for issuance of form 790 and which fall into the general categories of safety, interference-harm actual/potential, or service quality violations.

- The specific administrative and non-technical rule violations described in the policy statement.

Pay up

The process of fining a station can be
Continued on page 92

TABLE 2. INTERFERENCE-HARM ACTUAL/POTENTIAL

1. Overpower operation, frequency tolerance, excessive modulation resulting in interference, spurious and/or harmonic emission. 74.636, 74.661, 73.1560, 73.1545, 73.1570, 73.44, 73.317, 73.687 (\$1,000 to \$2,000)

• Examples:

Output power grossly exceeding the authorized power. (\$1,000)

Where numerous complaints occur or where deliberate or malicious interference occurs or where significant harm is caused. (\$1,500 to \$2,000)

2. Failure to cease operation by remote control when a malfunction occurs in the remote-control system. 73.1410 (\$300)

3. Failure to ensure correct calibration of remote antenna base, common point and extension meters, e.g. meter readings are grossly out of tolerance from licensed parameters. 73.57, 73.1550 (\$300)

4. AM directional antenna systems tolerance, e.g. base and sample currents are grossly out of tolerance from licensed parameters. 73.62 (\$600 to \$1,500)

• Examples:

Discrepancy in AM directional parameters (as evidenced by more than 5% deviation of actual base and antenna monitor currents from licensed values) resulting from significant misreading of meters, e.g. wrong scale. (\$600)

AM directional parameters grossly exceeding licensed values due to improper equipment installation. (\$1,500)

5. Failure to make field strength measurements quarterly at the monitoring point locations for stations not having an approved sampling system. 73.61 (\$600)

6. Terms of authorization, e.g. operating non-directional when directional is required, failure to change power at sunset and sunrise, for an extended period of time. 73.1745 (\$1,000)

7. Station operating under post-sunset authority. *Docket No. 82-538*

• Examples:

Operating 50% over power. (\$1,000)

Operating one-half hour or longer after the station was required to sign off under the post-sunset authority. (\$1,000)

TABLE 3. ADMINISTRATIVE AND NON-TECHNICAL

1. Failure to maintain or have a complete public inspection file. 73.3526 (\$300)

2. Failure to have a licensed operator on duty. 73.1860 (\$200)

3. Willfully or repeatedly incorrect on entries, e.g. readings repetitively logged when the meter is defective. 73.1800 (\$1,000)

4. The commission has reduced or eliminated the logging requirements detailed in a Report and Order dated August 12, 1983, Docket No. 82-537. However, it has maintained some logging requirements, and forfeitures will be imposed for failure to log the following:

- Tower lighting operation. 17.49, 73.1213 (\$300)

- Experimental Broadcast Stations in Part 74. 74.181 (\$300)

- AM broadcast stations operating without commission-approved antenna systems. 73.1820 (\$600)

- Situations involving interference or deficient technical operation. FCC may require special technical records to be maintained, as necessary, to resolve special problems. 73.1835, 74.19 (\$600)

- Tests of the emergency broadcast system. 73.1820 (\$300)

5. Repeated failure to reply with assurance of correction/repair for violations listed on *notice of apparent liability. Section 308(b) of the Communications Act of 1934, as amended* (\$1,000)

6. Failure to identify the station in the manner and at the times specified. 73.1201 (\$500)

7. Minor technical, administrative and operation rules where the forfeiture penalty will result for repeated violation subsequent to initial violation where Form 790 notification occurred.

• Examples:

Failure to have available the EBS checklist. 73.908 (\$300)

Failure to have available the EBS authenticator word list. 73.910 (\$300)

Defective meters, improper scale/range, all powers. 73.1215 (\$300)

Failure to have available a copy of the most recent antenna resistance or common point impedance. 73.1225 (\$500)

Station and/or operator(s) license(s) not posted. 73.1230 (\$200)

Failure to designate a chief operator (agreement not available or posted with operator license or in station records). 73.1870 (\$500)

Introducing the New Generation of Wireless Microphones from HME.



All New RF Link. All New Switching Diversity. All New Packaging. And *Unbeatable Sound.*

HME's new Series 50 is so advanced that anything else is a compromise.

Here's just a few highlights:

A completely new RF link greatly improves the capture ratio for dropout-free performance under the most demanding conditions. Our new state-of-the-art noise-free switching diversity system has broken the price/performance barrier.

There's a new, rugged ABS body on the hand-held models, along with an advanced internal antenna with superb radiation characteristics. The new dual-frequency body pacs give you top

performance under physical as well as electrical abuse.

HME's new NRX II™ noise reduction system has to be heard to be believed. It's the only noise reduction system designed *expressly* for wireless microphones. And it's available only in HME's New Generation Series 50, both hand-held and body pac.

See your HME dealer for the final shock:

You'll find HME's Series 50 price *below* every other professional system. That's because we're sure every thinking professional will standardize on it.

And why not. There's nothing even close.




HME ELECTRONICS, INC.

6675 Mesa Ridge Road
San Diego, CA 92121
(619) 535-6060

**HME's New Series 50 Wireless Microphone—with NRX II™
No Equal. Nothing Close.**

Circle (66) on Reply Card

**When
it's time to
move up
from
U-matic,
move up
to
U-matic.**

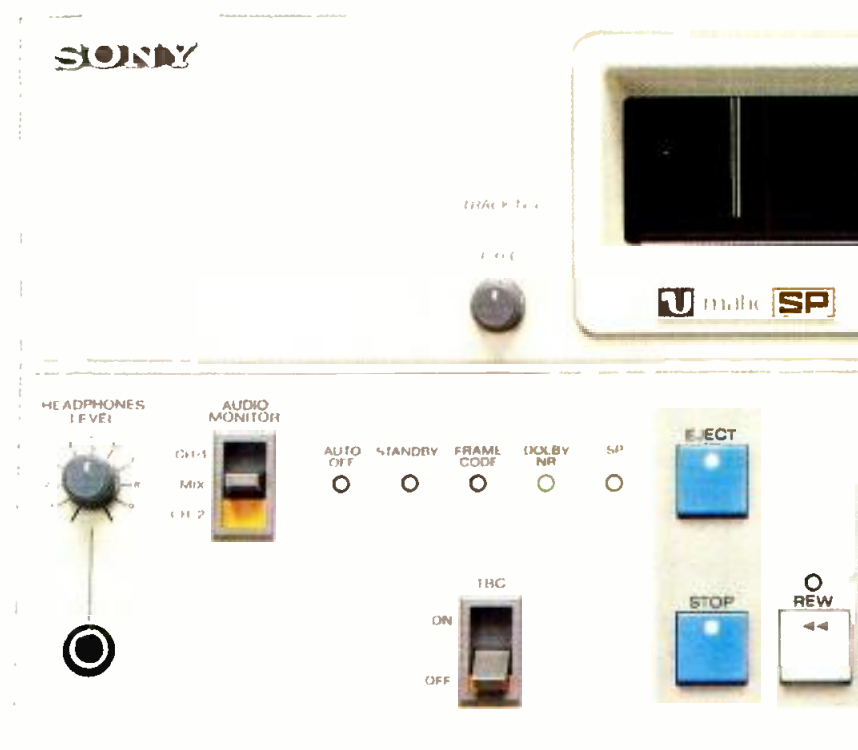

Some video experts would have you believe that the only way to upgrade your video equipment is to throw it all out and start over.

At Sony, it's a different story. And you'll see why when you see the new TYPE VII and TYPE IX series of U-matic players and recorders.

Not only are they compatible with your existing U-matic equipment,



they offer performance that until now you could only get at twice the price.

The first improvement you'll notice is in the picture. Both the VP-9000 player and the VO-9600 player/recorder incorporate SP "superior performance" technology. This means you get an outstanding 330 lines of resolution.

It also means you can make copies without making compromises. With SP, third generation tapes look as good as first generation conventional U-matic. And sound even better. Because every word is heard through Dolby C noise reduction systems.

Playback is also more precise. A 33-pin parallel remote control comes standard on the VP-7000 as well as on the TYPE IX models. Even more impressive is a new system of absolute address called Frame Code. It assigns a number to each frame in your video which you can then locate automatically. With no guesswork.

In fact, with an RS-232C computer interface, you can preset your players and recorders to start and stop on certain frames or rewind and playback at certain times. So you can conveniently automate programming, insert commercials, or set up point-of-purchase displays.

What's even more convenient about the new U-matics is the price. Never before have Sony VTRs offered you so much for so little.

And since these new models are compatible with conventional U-matics, they'll fit into your facility as easily as they fit into your budget.

To learn more about TYPE VII and IX, or to attend a Sony video workshop, please write to Sony, P.O. Box 6185, Department U-1, Union, NJ 07083.

With U-matic, moving up to a new standard in video could be as simple as opening a box and plugging it in.

SONY

Professional Video

Circle (15) on Reply Card

A Good Reason To Call RTS When You're In The Business Of Recording On Tape.

RTS SYSTEMS
PROGRAMMABLE REFERENCE
TONE GENERATOR
MODEL 927

TABLE 4. SERVICE QUALITY

1. TV pulse and reference levels. (\$500)
2. FM stereo parameters. (\$500)
3. SCA parameters. (\$500)
4. AM audio performance requirements. (\$500)
5. Excessive AM or FM modulation. (\$500)

Continued from page 88

quite lengthy. If, upon inspection, the engineer in charge issues a NAL, the station has 30 days to respond to the notice. The NAL specifies the fine that could be levied for the cited violation.

The station can request a review of the NAL prior to the issuance of a *notice of forfeiture* (NOF). The field supervisor will review the NAL and inform the station of the determination. A higher-level review can be requested if a NOF is issued. At this point, the fine can be reduced or even canceled.

If a NOF is issued, the station has several options. The station can appeal the decision to the field engineer or chief of the field operations bureau. At this stage, if the NOF is judged to be correct, the station is ordered to pay the fine. If the station decides to pursue the matter, the commission may file a civil suit for collection of the fine. The process then passes to the courts. Both the FCC and the station present their cases before a U.S. District Court judge, who then issues a ruling. If the court rules against the station, an order for civil collection of the fine is issued.

Monetary fines are not always levied. Other administrative sanctions may be applied as deemed appropriate.

What's the cost?

Specific fines to be levied are listed in the FCC memorandum. Only in those cases involving mitigating circumstances may fines be adjusted by the field offices. However, the engineer in charge may increase or decrease the fine, with justification. The amount doubles for a second offense.

The listed violations are broken down into four categories: safety (see Table 1), interference-harm actual/potential (Table 2), administrative and non-technical areas (Table 3) and service quality (Table 4).

Each table lists specific rule violations, the applicable FCC regulation number for each and the fine to be levied. Some are further broken down with examples and appropriate fines. This material was taken from the December 1985 memorandum issued by the chief of the mass media bureau.

||:~:~|||

Our Model 927 Programmable Reference Tone Generator adds a new dimension to tape recording quality assurance.

Operating in a *stereo* mode, it is user programmable with discrete tones, pink noise, noise reduction tones, phase check, stereo I.D. and more.


We think the 927 can improve your audio business. Please call or write for descriptive literature.

PROFESSIONAL INTERCOMMUNICATIONS • PROFESSIONAL AUDIO PRODUCTS

Circle (68) on Reply Card

RTS SYSTEMS
INCORPORATED

1100 West Chestnut Street • Burbank, California 91506 • Telephone 818 840 7119 • Telex 94855 • Telefax 818 842 4921

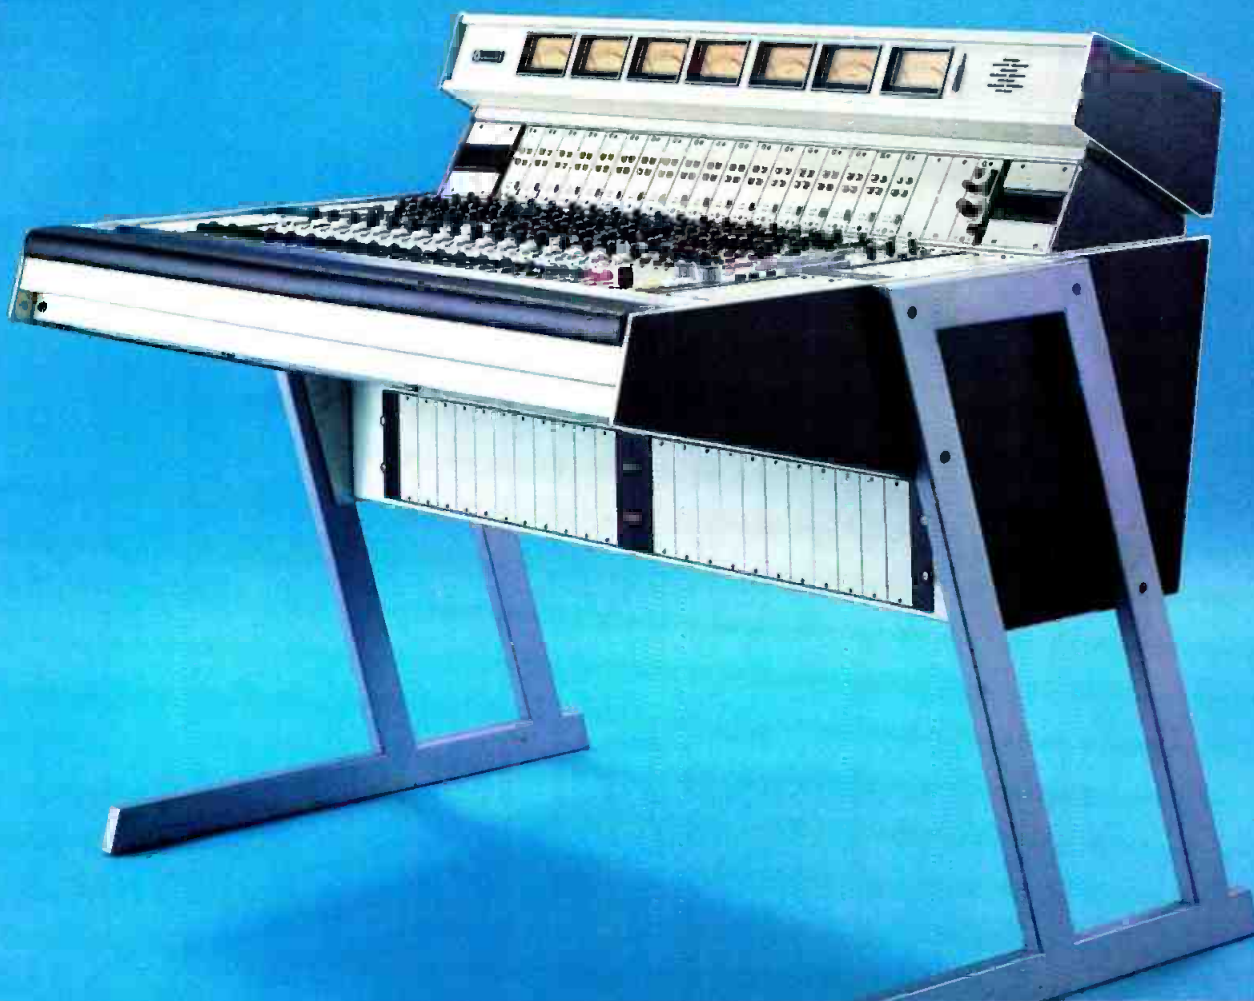

High Definition Stereo Audio

For the complete picture

The 310 Series Audio Production Console has been specifically designed to complement the latest audio and video technology. It's the only console in its class, offering mono or stereo inputs with VCA sub-grouping, with or without equalization, output submastering, audio-follow-video capability, a comprehensive user-programmable logic system and a wide range of accessories for custom tailoring to your specific requirements.

Call 1-800-638-0977 for further information.



auditronics. inc.

3750 Old Getwell Rd.
Memphis, TN 38118 USA
Tel: (901) 362-1350
Telex: 533355

Circle (69) on Reply Card

3

Using digital oscilloscopes

By Ed Caryl

Today's digital scopes can be powerful tools for the broadcast technician.

Maintaining the video and non-video circuits in a broadcast station today presents a wide range of technical

Caryl is a technical communications manager with Tektronix, Beaverton, OR.

challenges. Only a variety of test and measurement instruments can solve the problems a technician will face. Special needs require special instruments. Recent advancements in digital technology have made the digital oscilloscope a


viable competitor with traditional analog scopes. Both types, however, have their strong points and weak points. The selection and use of a digital scope requires a full understanding of its operation and specifications.

In a typical TV plant, maintenance work requires the following test and measurement equipment:

- A waveform monitor for making quick and easy video-signal level and timing measurements.
- A vectorscope for displaying, in familiar polar coordinates, video-signal phasing.
- An analog oscilloscope for displaying high-repetition-rate signals—video and non-video—in real time, in the studio or in a mobile unit.
- A digital scope for storing waveforms in local memory or sending them to another unit for analysis or comparison.

You probably are familiar with the many advantages of waveform monitors, vectorscopes and analog oscilloscopes. You may be less familiar with the advantages and unique features of new digital scopes for special video and non-video signal measurements. Figure 1 summarizes the advantages and capabilities of these four major waveform test and measurement tools for television.


All these tools are evolving. For exam-

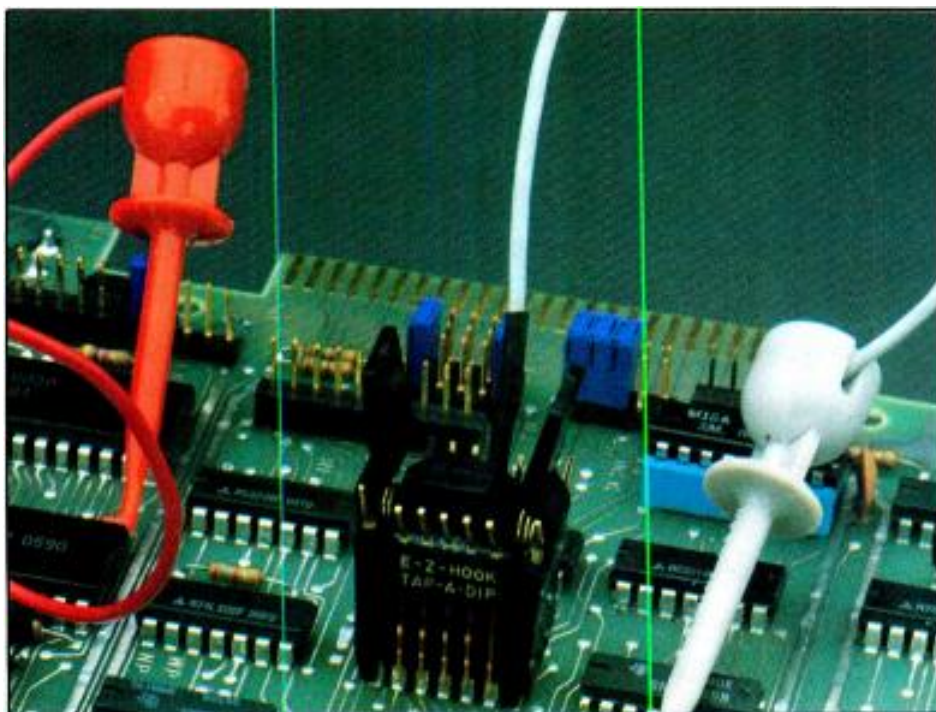

EEV KLYSTRONS

SO MUCH MORE TO OFFER

*The most comprehensive range of
External Cavity UHF TV Klystrons*

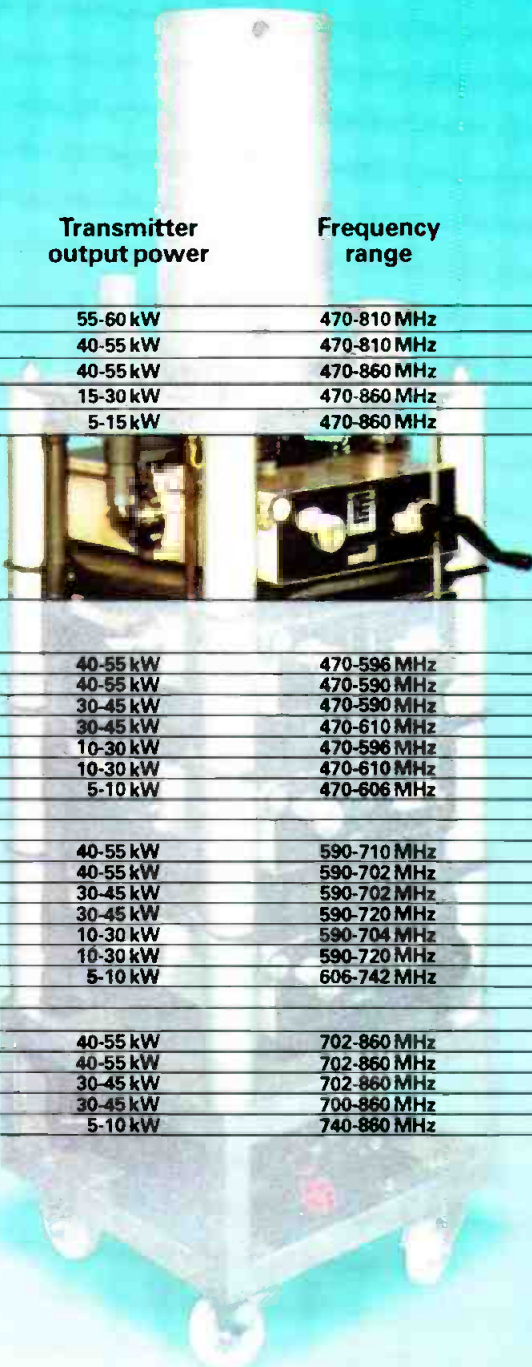

	Transmitter output power	Frequency range	Typical Sync efficiency
WIDEBAND SERIES			
K3672BCD	55-60 kW	470-810 MHz	44% to 48%
K3572BCD	40-55 kW	470-810 MHz	43% to 46%
K3272WBCD	40-55 kW	470-860 MHz	42% to 45%
K3271BCD	15-30 kW	470-860 MHz	42% to 47%
K3270BCD	5-15 kW	470-860 MHz	42% to 47%

STANDARD SERIES

Low Band

K3276HBCD	40-55 kW	470-596 MHz	38% to 43%
K3382BCD	40-55 kW	470-590 MHz	38% to 42%
K3217HBCD	30-45 kW	470-590 MHz	40% to 42%
K3282BCD	30-45 kW	470-610 MHz	30% to 40%
K3230BCD	10-30 kW	470-596 MHz	40% to 42%
K376L	10-30 kW	470-610 MHz	34% to 40%
K370/W series	5-10 kW	470-606 MHz	29% to 35%

Mid Band

K3277HBCD	40-55 kW	590-710 MHz	38% to 43%
K3383BCD	40-55 kW	590-702 MHz	38% to 42%
K3218HBCD	30-45 kW	590-702 MHz	40% to 42%
K3283BCD	30-45 kW	590-720 MHz	30% to 40%
K3231BCD	10-30 kW	590-704 MHz	40% to 42%
K377L	10-30 kW	590-720 MHz	38% to 45%
K371/W series	5-10 kW	606-742 MHz	32% to 35%

High Band

K3278HBCD	40-55 kW	702-860 MHz	38% to 43%
K3384BCD	40-55 kW	702-860 MHz	38% to 42%
K3219HBCD	30-45 kW	702-860 MHz	40% to 42%
K3284BCD	30-45 kW	700-860 MHz	30% to 40%
K372/W series	5-10 kW	740-860 MHz	32% to 35%

AVAILABLE TODAY

EEV Klystrons

USA: EEV Inc., 4 Westchester Plaza, Elmsford, NY 10523, USA Telephone: 914 592 6060 Telex: 6818096 Fax: 914 592 8342
 UK: EEV, Waterhouse Lane, Chelmsford, Essex CM1 2QU, England Telephone: (0245) 261777 Telex: 99103 Fax: (0245) 50424
 CANADA: EEV Canada Ltd, 67 Westmore Drive, Rexdale, Ontario M9V 3Y6 Telephone: 416 745 9494 Telex: 06 989363 Fax: 416 745 0618

Circle (70) on Reply Card

www.americanradiohistory.com


Figure 1. A quick comparison of TV studio test and measurement equipment (a), and a detailed look at the advantages and features of four major types of TV measurement equipment (b).

ple, vectorscopes and waveform monitors now are available in portable, even battery-powered, packages. Combined waveform monitors and vectorscopes also are available. Analog scopes are adding capabilities formerly found only in digital scopes, such as automatic amplitude and time measurement.

Digital scopes for special needs

New digital scopes offer advanced features that allow maintenance engineers to handle special problems that were difficult, or even impossible, to solve in the past. In the engineer's tool kit, digital scopes can be a welcome addition to the proven value of waveform monitors, vectorscopes and analog scopes. Figures 2 and 3 illustrate the major scope technologies.

After a digital scope has digitized a test signal, it can store the waveform in memory or send the waveform to another device. Local (in-scope) storage

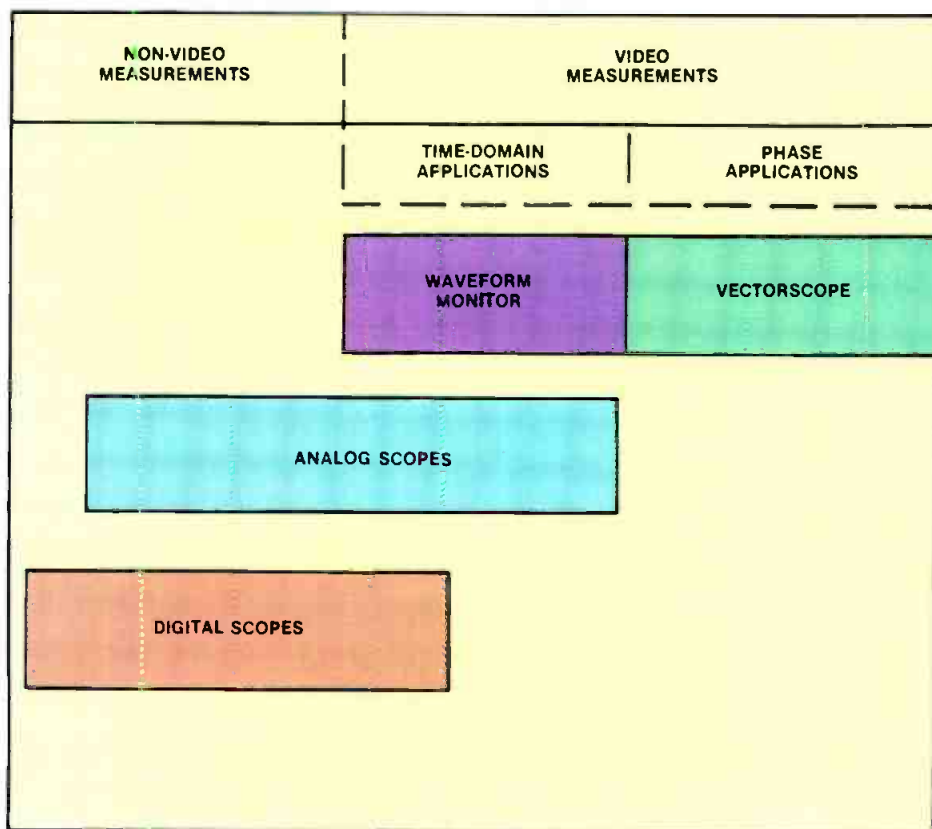

Think of it as a REV7

For the past few years, audio professionals have been praising Yamaha's REV7 digital reverb to the skies. So there was incredible pressure to make its successor even better than expected.

Introducing the REV5. Representing a breakthrough in the sound barrier for reverb. And a collective sigh of satisfaction from the overachieving design engineers at Yamaha.

Because not only is the REV5 matured in

capabilities, it's improved in sonic quality as well.

We added more DSP chips to boost the REV5's processing power, creating smoother reverb sounds and multi-effect combinations. Full bandwidth extends reverb to 20 KHz.

In addition to master analog EQ, the REV5 has three-band parametric, programmable digital EQ. So when you make individual EQ settings, they're recalled with each program.

TEST AND MEASUREMENT TOOL	MAJOR ADVANTAGES	EXAMPLE UNIQUE CAPABILITIES
WAVEFORM MONITOR	Allows quick, easy visual checks of video signals; dedicated to video measurements.	Front-panel and display graticule are optimized for specific TV measurements.
VECTORSCOPE	Provides a high-resolution vector display of chrominance phase and amplitude.	Demodulates color video, and displays phase and amplitude of chroma components.
ANALOG SCOPE	Measurement versatility provides a video and non-video general-purpose tool.	High display rate allows user to see infrequent changes in high-repetition-rate signals.
DIGITAL SCOPE	Can apply signal averaging to reduce signal noise for more exact measurements. Can display low-repetition-rate signals at normal brightness.	Captures, stores, and transfers waveforms. Envelope mode allows measuring peak-to-peak noise and chroma levels.

allows you to save a known-good waveform at one test site, acquire a possibly faulty waveform at another site and compare the two on-screen for a quick pass/fail test. With battery-backed memory, portable digital scopes can store a complete set of comparison waveforms for months. (See Figure 4.)

Digital scopes can make some special measurements that analog scopes cannot make unless they use *microchannel plate* (MCP) display technology. MCP is an electron-multiplier device located behind the screen phosphor. The MCP amplifies cathode ray tube (CRT) beam current, producing a high CRT writing rate.

A digital scope allows you to display—at full brightness—the waveform of a low-repetition-rate signal, such as single lines or parts of lines at the color field rate.

Video maintenance today typically includes checking many digital signals, such as digital effects, computer-generated video and digital video switching pulses. These operations use complex signals and single pulses that may occur only once per frame or once per color field. Pulses such as VCR servo control signals, which are a few nanoseconds wide and occur 15 to 30 times per second, are difficult to see on almost



with a sonic boom.

And when you don't have the time to make many decisions, there are 30 preset programs, plus nine unique preset combination programs. Sixty user-memory slots let you save your custom effects.

And even though a lot of the features are new, using the REV5 won't be. Because the format is the same as the REV7 you're used to using.

Check with your friendly Yamaha Professional Audio dealer about the new REV5. Once you hear

it, you may find it difficult to come back down to earth. Yamaha Music Corporation, Professional Audio Division, P.O. Box 6600, Buena Park, CA 90622. In Canada, Yamaha Canada Music Ltd., 135 Milner Avenue, Scarborough, Ontario M1S 3R1.



YAMAHA®
Engineering Imagination™

Circle (71) on Reply Card

BROADCAST THE NEWS WITHOUT THE NOISE.

The new SM84 Lavalier Mic.

A super-cardioid pick-up pattern enables the new SM84 Condenser Microphone to reject unwanted background noise without compromising audio quality. So even if there's activity near your reporter or newscaster, the only thing the viewers hear is the news. The SM84 also provides greater gain before feedback than other lavalier condenser mics.

The microphone's tailored frequency response provides professional sound that's unusual in chest-mount applications. The 730 Hz filter compensates for chest resonance, while the high-frequency boost provides flatter, more natural response. The 12dB/octave low-end rolloff (below 100Hz) reduces room noise


and other low-frequency signals. In addition, excellent shielding yields low RF interference and hum pickup.

Easy to use.

The mic runs on phantom power or a standard 9-volt battery. The unique side-exit cable minimizes "cable hiding" problems. And universal mounting clips are included to handle virtually all attachment requirements.

Plus, it's built with Shure's legendary emphasis on ruggedness, reliability and performance.

*Shure Brothers Inc.,
222 Hartrey Ave.,
Evanston, IL 60202-3696
(312) 866-2553.*



When background noise isn't a factor, consider the SM84 Omnidirectional Lavalier Microphone.

Note: mics shown actual size.

SHURE®

THE SOUND OF THE PROFESSIONALS®...WORLDWIDE

any analog scope. They can be viewed easily, however, on a digital scope.

Vertical interval test signal (VITS) and vertical interval reference signal (VIRS) waveforms occur at the frame rate. These signals are difficult to see on most analog scopes. (MCP analog scopes are the exception to this rule.) Triggering on individual lines in a field is another barrier for most scopes in video applications. However, an analog or digital scope with advanced TV triggering capabilities can use VITS and VIRS to troubleshoot or adjust video equipment using the broadcast video signal. Figure 5 shows an example waveform.

Some analog and digital scopes can trigger on a specific line in a specific field. The readouts at the top of the digital scope display of Figure 5 show that the scope is triggering on the horizontal sync pulse negative edge of line 70 in field 2.


A digital framing pulse occurs 29 μ s into line 70, field 2, so the user has delayed time base B by 29.3 μ s into line 70 to display the pulse for detailed examination. The upper trace (channel 1) shows a digital framing pulse. The user has set the cursors to measure the pulse width (73.500ns). Because of its low repetition rate, this narrow TTL pulse would not be visible on analog scopes that don't use MCP technology.

Digital scopes can end another headache—the need to continuously watch a display for an intermittent error or failure. You may need to watch a waveform for interference hits in the transmission system. You also may need to look for arcs within various stages of the transmitter, high-power filters, transmission line or broadcast antenna.

Consider the following example. You are using a scope that has a "baby-sitting" feature. First you display the normal waveform, then you build an envelope of limits around the target waveform. A spike on the test waveform or drift beyond the specified limits causes the scope to store the data in memory or to document it on a printer or plotter.

While the scope baby-sits the signal, you can attend to more challenging tasks or simply finish your work at a reasonable hour. Figure 6 shows a baby-sitting example. The screen display illustrates the horizontal sync pulse and the rising edge of the VITS on line 17, field 2. (To simplify the display, this example shows a black-and-white signal.) The envelope around the signal sets acceptable amplitude limits above and below the expected values. If the test signal exceeds the envelope, the scope captures the waveform, stores it and outputs it to a printer.

You have another choice, too. You can send a waveform from the scope to com-

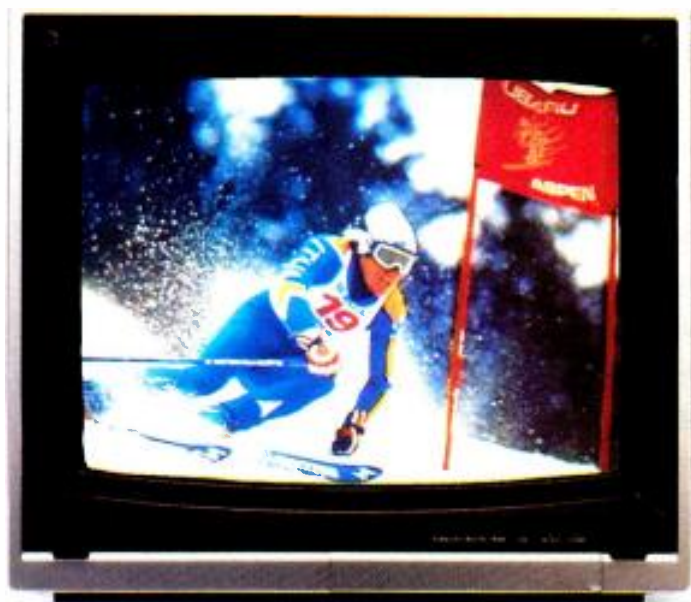

Freeze.

Frame.

Introducing the fastest, easiest way to get quality prints and slides from video.

Now you can capture the moment, freeze it, and frame it. All with the touch of a button. With the FreezeFrame Video Image Recorder from Polaroid.

FreezeFrame produces sharp, instant color prints and color or black and white 35mm slides from virtually any video source. And it delivers a finished picture that is far superior in quality and resolution to direct screen photography or thermal video



System includes Video Image Recorder, control console, and print film camera adapter. 35mm camera adapter optional.

image recorders.

FreezeFrame can be used in broadcast, production and advertising to proof, edit, storyboard, or reference.

It can also be used to pull a print off a just-breaking news story.

The FreezeFrame system includes a Video Image Recorder, control console, and print film camera/adaptor. And the system connects easily to video cameras, professional VCR's, laser disc players and computer graphics systems. It's fast, easy and at \$1,899,* very affordable.

To find out how FreezeFrame can help you, and to learn all about our 21 day satisfaction guarantee, call toll-free 800-343-5000, 8 a.m. to 8 p.m. Eastern Time.

Or fill out and return the coupon. We'll give you the full picture and show

you just how easy it can be to capture the moment on FreezeFrame.

For more information, mail this coupon to Polaroid Corporation, Dept. 671, P.O. Box 5011, Clifton, NJ 07015.

☐ Please send more information.

☐ I'd like a demonstration.

BE 11/1

Name _____

Title _____

Company/Institution _____

Address _____

City _____ State _____ Zip _____

Telephone _____

Video Source _____

Application _____

 **Polaroid**


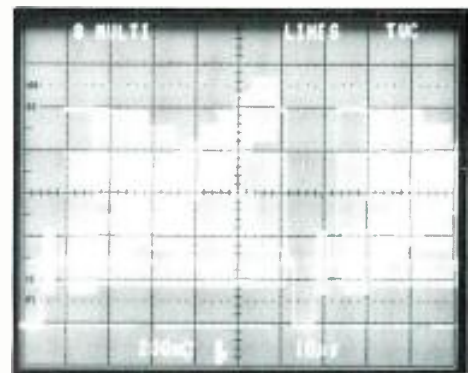


Figure 2. Simplified block diagram of an analog oscilloscope (a). The display shown in (b) is from an analog scope triggered on all TV lines. It illustrates three waveforms: color burst, a staircase and red bar. The photo demonstrates the analog scope's capability to display a waveform from any point in a TV system. (At the top of the screen, the readouts reveal that the front-panel setup for this display was saved in the eighth setup, the setup was named MULTI, the scope is triggering on all TV lines and the TV clamp is on.)

Don't settle for that colors a shotgun mic off-axis sound.

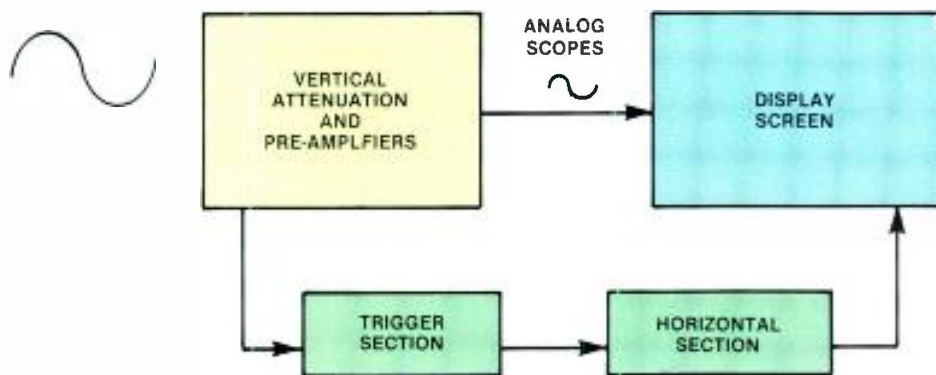

The new lightweight Shure SM89 eliminates coloration up to 30° off-axis. Thanks to its new Accu-Port™ design, the off-axis response of the SM89 is smooth and natural, free of the peaks and dips caused by the comb-filter characteristic of most shotgun mics. So off-axis sound is much easier to control and equalize.

The SM89 also features a newly designed condenser cartridge for improved sensitivity. Plus a built-in rolloff filter that eliminates low frequency noise problems, and controls proximity effect in close-up work.

The durable aluminium design is 30-40% lighter than other models. The low noise amp also can be powered from 11 to 52 VDC phantom power and separates from the capsule for field repair.

For more information, write or call Shure Brothers Inc., 222 Hartrey Ave., Evanston, IL. 60202-3696 (312) 866-2553. G.S.A. Approved.



Circle (74) on Reply Card

puter memory or to another peripheral device. At your leisure, you can recall the waveform for re-examination, comparison to other waveforms or identification of long-term performance trends.

Automating test procedures

Programmable signal generators and digital scopes can be integrated into computer-controlled systems that automate and speed maintenance procedures. For example, a controller, scope and companion test-generator program allow maintenance engineers to generate—without writing any code—a test procedure for a wide variety of broadcast hardware, such as the servo section of a video recorder.

Such automated test procedures combine two sources of troubleshooting knowledge: the manufacturer's recommendations contained in the service manual and your own experience working with the equipment. With the proper test procedure stored on a PC (the controller), an engineer who is less experienced with a given piece of equipment can follow the troubleshooting routine step by step, attach the scope probes to the proper test points, and let the program make the pass/fail and branch decisions.

Still another dimension that digital scopes can add to automated test systems is the capability to transfer captured waveforms to the PC for display or analysis.

The most advanced digital (and analog) scopes allow you to create test sequences on the scope front panel. You don't need a controller, and you can store a large

Now In Operation Around The World...
9600 SERIES — WE DELIVER!!

WE WOULD LIKE YOU TO ASK US SOME TOUGH QUESTIONS

If the only foolish question is the one
you didn't ask, then don't be foolish
when buying your mid-sized video
production switcher.

Ask for the 9600 Series System
Integration Guide from
INTERGROUP.

We have excellent answers for your
toughest questions!

It will change your standard
for comparison!



A.S.A.P. \$40K?
*VERIFY THE PRICE!!
GET BACK TO
ME -
TODAY



FOR INFORMATION CONTACT:

INTERGROUP

2040 N.W. 67TH PLACE
GAINESVILLE, FLORIDA 32606 U.S.A.

1-800-874-7590
(904) 335-0901
TWX 810-825-2307

Circle (75) on Reply Card

www.americanradiohistory.com

QUESTIONS (GET DELIVERY
FOR INTERGROUP INFO.)

1. WHAT IS M⁴-KEY? IS IT REAL
100% USER TRANSPARENT?
2. "285 KEY MEMORY REGISTE
MIS-PRINT?? (THAT'S A LOT
MEMORY.)
3. "PAMS" IS SO LOGICAL!
(WHY DOESN'T
HAVE IT

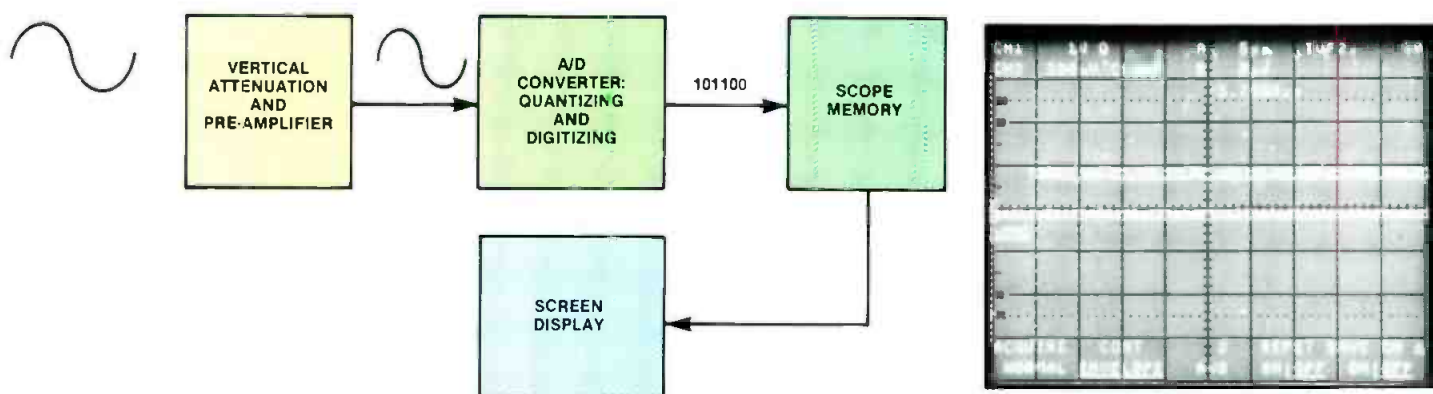


Figure 3. Simplified block diagram of a digital oscilloscope (a). The display shown in (b) is from a digital scope set to measure part of line 70, field 2. The upper trace (channel 2) shows the video component of the signal. The lower trace (channel 1) reveals, in the scope's envelope mode, a digital framing pulse peak (lower center). A unique feature of digital scopes, this mode shows waveform maximum and minimum points (peaks).

number of steps (up to 200 is not uncommon). Each step consists of a front-panel setup or scope action or both. The setup can be complete for a particular measurement, including presetting measurement cursors. The setup may include acquiring a waveform and sending it to a printer or plotter.

This level of automation improves

throughput, increases repeatability, reduces drudgery and minimizes the potential for operator error. Figure 7 shows an example system designed using standard programmable video test and measurement instruments. An IEEE standard 488 GPIB (general-purpose interface bus) cable connects the instruments to the PC.

Limitations

In some digital scope applications, aliasing may occur. (See Figure 8.) Aliasing results from undersampling; the scope acquires too few sample points to accurately capture the signal being measured. Chroma bursts often are aliased in digital scope displays of video waveforms.

The answers to a radio engineer's pressing audio problems:



YES,

YES.

The Sound Technology Programmable Audio
Transmission Test Set.
Fast. Precise. Comprehensive. Practical.

HIGHER
TECH

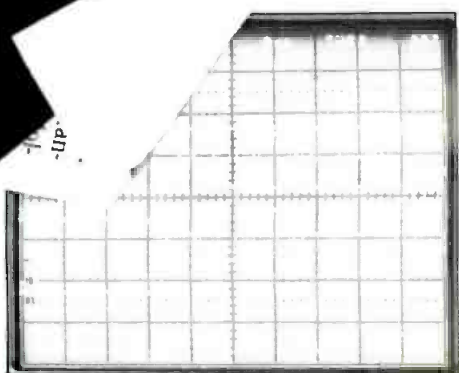


Figure 4. A digital scope has the capability to store and redisplay a waveform. The display shown here compared a stored reference waveform (REF 2) in the lower trace with a real-time sync and burst waveform from line 257, field 2, in the upper trace.

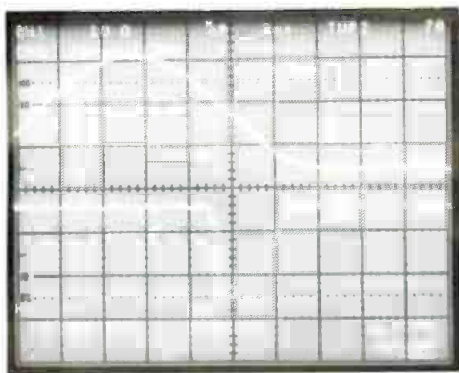


Figure 5. A digital scope display showing the capability of triggering on a specific line in a specific field. Note that the digital scope can display a waveform of low repetition rate at full brightness.

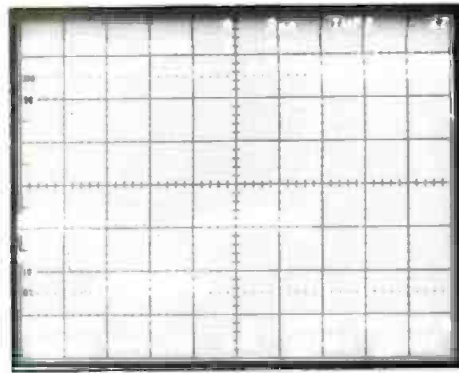


Figure 6. A display showing a user-defined envelope of test limits around a real-time waveform.

In some applications, the problem with aliasing is that the operator is unaware it is occurring. Scopes with advanced features offer an easy way to check for aliasing. In one approach, the *envelope mode* records the minimum and maximum values at each point, providing an outline of the true waveform. This information alerts the operator that aliasing is

occurring on the displayed waveform.

Two techniques prevent aliasing. Digital scopes that use *vector* displays interpolate between sample points and connect them with straight lines (vectors). Increasing the scope sweep speed more directly reduces aliasing because more sample points are displayed.

Key digital scope specifications

Many of the key specifications for digital oscilloscopes are similar in nature to those for analog units. However, several of the following specs, unique to digital scopes, are important to consider during the selection process.

- **Bandwidth and sampling rate:**

These two specifications are related.

The answers to a television engineer's pressing audio problems:



YES,

YES.

The Sound Technology MTS Stereo Audio
Generator/Analyzer Test Set is
Fast, Precise, Comprehensive, Practical

HIGHER
TECH

SOUND
TECHNOLOGY
1400 Bell Avenue
Campbell, California 95008
415/375-6000 Telex 351147

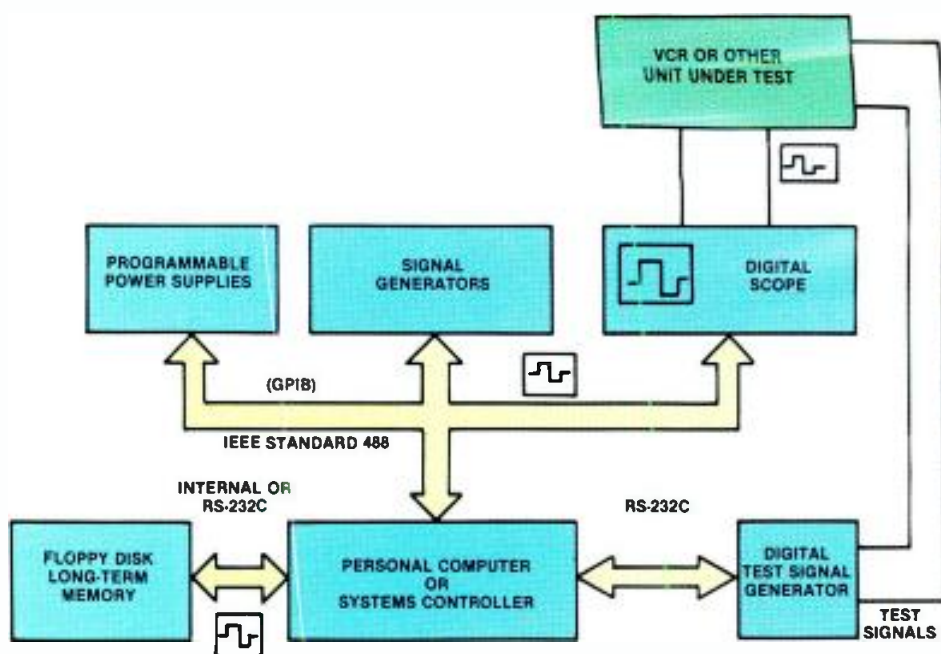


Figure 7. A simplified block diagram of a PC-based, modular automated test system that uses a digital scope for waveform acquisition, processing and transfer.

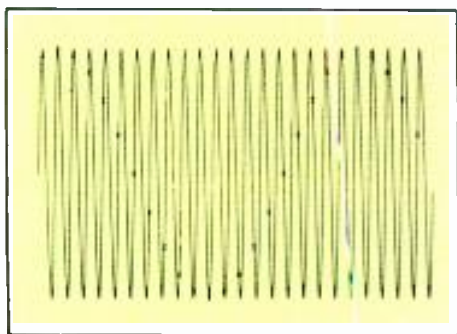


Figure 8. An illustration of the problem of aliasing in digital oscilloscopes. Aliasing can be thought of as an optical illusion. If the scope takes too few samples to accurately define the applied signal frequency, the user can see a waveform that apparently has a lower frequency.

but not identical, digital scope parameters. *Bandwidth* is the range of frequencies a scope can acquire and display with less than 3dB attenuation. Digital scope manufacturers specify bandwidths for two conditions, *repetitive* and *single-shot* (single-event) acquisitions.

For repetitive acquisitions, the bandwidth often is called *analog bandwidth* or *equivalent-time bandwidth*. This specification is the bandwidth of the scope's analog signal path.

Single-shot bandwidth is the bandwidth of the scope when it makes only one acquisition, whether the test signal is repetitive or single-event. This specification depends on three factors:

1. The sample rate of the instrument.
2. The type of interpolation used to reconstruct the signal.
3. The number of coefficients used to perform the interpolation.

• **Useful storage bandwidth (USB):**

USB is a valuable way to observe the capability of a digital scope to display sine waves. USB is the maximum digitizing rate divided by the number of samples the scope needs in order to properly display a sine wave.

The digitizing rate is the number of samples that the scope acquires per second (a common number is 100 megasamples/second). The number of samples needed to display a sine wave depends on the type of interpolator the scope uses. (An interpolator adds data words between the sample points.)

• **Averaging and smoothing:**

These two waveform processing techniques make signal viewing easier. Averaging works on multiple acquisitions of samples of the signal under test. This feature numerically averages the vertical (voltage) values for each time point on the waveform over the number of acquisitions chosen by the user. Averaging reduces random noise in repetitive signals and increases effective resolution.

Smoothing reduces noise on single-shot acquisitions of the signal under test. Smoothing firmware examines several points at once on an acquisition, then processes the set of values to reduce noise.

Selecting an oscilloscope

The selection of an oscilloscope—ana-

log or digital—should be based on all of the pertinent facts have been examined, and the cost vs. benefit approach have been studied. When making such a purchase, consider the following recommendations:

• **Define your application.** Digital scopes are appropriate for many non-video applications in a TV broadcast facility. They also are well-suited for some special video needs.

• **Examine your needs.** What kinds of non-video measurements will you be making? Single-shot or repetitive? At what frequencies? How faithfully do you need to reproduce the signal? What is the required accuracy and resolution?

• **Know whether the scope is user-friendly.** Capitalize on your familiarity with analog scopes. Some digital scopes have front-panel designs similar to popular analog units. Others combine analog (non-storage) and digital (storage) features in one unit. Find a unit that you are comfortable operating. Familiar operation can make your maintenance work more efficient.

• **Study the specs.** Take time to understand the key specifications of the units you are considering. For digital scopes, the terms sample (digitizing) rate and useful storage bandwidth may be new to you.

• **Look for easy-to-use features.** Digital or analog scopes with advanced features cut drudgery, save time and improve results simply because they are easier to use. For example, on some scopes, you can attach probes to a test point for an automatic display of several cycles of an unknown non-video signal. The scope sets itself up at the touch of one button. Another example is the capability to select specific measurements from an on-screen menu. The scope makes the measurements automatically and displays the numerical results alongside the waveform.

• **Consider the video applications.** Look for scopes designed to work with video. Some digital scopes have options that enhance the unit's performance when it displays a video waveform. An effective digital scope for video applications should include:

1. A sync separator capable of triggering the scope on any line in either field.
2. Backporch clamp circuitry.
3. The capability to work with traditional standards (NTSC, PAL and SECAM) and non-traditional video standards (HDTV, PC displays & other non-standard displays).

The choice of an oscilloscope for maintenance work is one that you—and the other technicians in your facility—will have to live with for a long time. Make the selection carefully.

GVG Sync Generators. Performance you can rely on. Time and time again.

Whatever your studio timing needs, GVG has an integrated family of solutions. From modules to master reference sync generators, GVG timing products give you high performance, at an affordable price.



9520 MASTER REFERENCE SYNC GENERATOR


The top of the line Model 9520 is the master sync generator for your facility. It accepts *two* optional Test Signal Generators. *SC/H phase is correct for all operating conditions.*

\$3,500

**9505 SOURCE
SYNC GENERATOR**
SC/H phase and color framing are always correct with the economical Model 9505 source sync generator. Like other GVG sync generators, the 9505 features an optional Test Signal Generator module.



Starting
at **\$1,800**

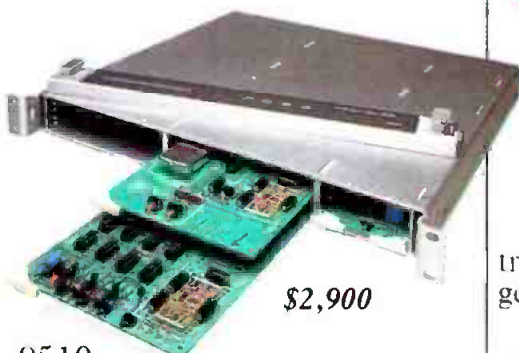

9510 REFERENCE SYNC GENERATOR

The 9510 reference sync generator is a versatile reference sync generator in a one rack unit package, with *absolute SC/H phase accuracy*. Options include a TSG module and a unique *Phase Pre-Set* that stores 16 phase settings in non-volatile memory.

\$2,900


9550 AUTOMATIC CHANGEOVER SWITCH

Select automatic or manual transfer between two master sync generators.



\$2,000

The Model 9550's switch mechanism is rated for more than 100,000 operations.

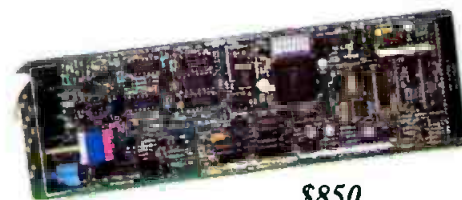

\$850

STM-85N SOURCE TIMING MODULE

Here's a new single-module timing tool that plugs into any GVG 8500 Video DA tray. It decodes encoded subcarrier signals producing retimed sync, blanking, subcarrier, V1, and color black. Of course, *SC/H phase is always correct.*



\$1,500

SCB-100N SYNC/COLOR BAR GENERATOR

The SCB-100N is your perfect solution for professional video or "off line" broadcast. Like our other sync generators, it gives you the performance you would expect from higher priced equipment.

The Model SCB-100N gives you a *fully SC/H phased sync pulse generator*, SMPTE color bar generator, and audio tone generator, all in one rack-unit.

Make time today to get the facts on the integrated family of GVG sync generators and timing equipment. For details, call the Grass Valley Group office nearest you.

Grass Valley Group®

A TEKTRONIX COMPANY

THE GRASS VALLEY GROUP, INC.® — P.O. Box 1114 — Grass Valley, CA 95945 USA — Telephone (916) 478-3000 — TRF: 160432
OFFICES: New York (201) 845-7988; District of Columbia (301) 622-6313; Atlanta (404) 493-1255; Chicago (219) 264-0931; Minneapolis (612) 483-2594; Dallas/Fort Worth (817) 483-7447;
Los Angeles (818) 999-2303; San Francisco (415) 968-6680. A TEKTRONIX COMPANY

Circle (77) on Reply Card

www.americanradiohistory.com

4

Testing stereo audio for mono compatibility

By Mike Coleman

If you want to broadcast quality stereo TV, you need to know what your audio system is doing.

One of the most misunderstood problems with TV stereo audio is monaural compatibility. Producing a stereo program that is compatible with mono TV sets is critically important, because mono listeners greatly outnumber stereo listeners—and they will for many years to come.

Mono listeners hear the sum of the left and right channels. But a good mono sum results from good left and right audio only if both channels are processed identically. You can't check each channel in isolation and expect an acceptable mono sum to result.

Consider this example: Figures 1(a) and 1(b) show the frequency-response

plots of a stereo audio system. Everything looks all right, and you might expect good mono. But look at Figure 1(c). It shows the frequency-response plot of the monaural sum of this system, which has a pronounced high-frequency rolloff. This particular problem is caused by a 30 μ s delay in the left channel. The frequency-response curve in Figure 1(c) was generated using common broadcast equipment, and it is typical of the problems broadcasters face with processing equipment in the audio chain.

You can observe and measure compatibility problems in two ways. Because the mono listener hears the sum of the left and right channels, you can add them in a test environment and make measurements directly on the resulting signal. This is easy to do and eliminates

any guesswork. The other way is to indirectly monitor the mono sum by feeding the same signal to both channels and observing the phase relationship between the channels at the output. Each technique has its place in TV station operation.

The summing amplifier

Making measurements on mono frequency response is simple if you have a summing amplifier. You can either purchase one or use the circuit shown in Figure 2 to make one. The output of the summing amplifier is what the mono listener hears. The plot in Figure 1(c) was made by measuring the output of a summing amplifier while sweeping the frequency of the left and right audio channels.

Coleman is a hardware/software engineer with the TV division of Tektronix, Beaverton, OR.


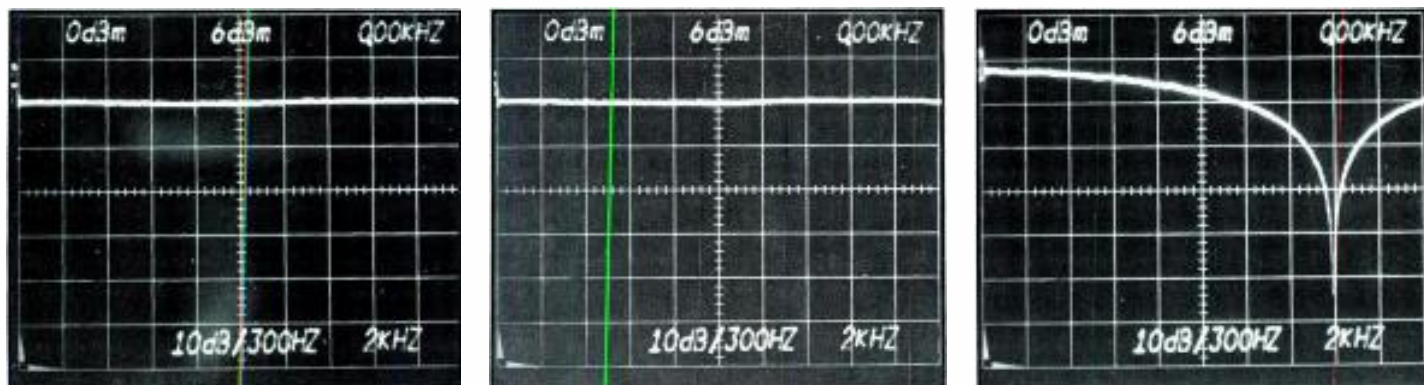


Figure 1. The frequency-response plots of a stereo audio system. Oscilloscope photo (a) shows left-channel amplitude vs. frequency. Photo (b) shows right-channel amplitude vs. frequency. Both plots seem perfect until the signals are summed to mono, shown in scope photo (c). Note the deep notch caused by a phase differential between the right and left channels. (Horizontal scale = 2kHz/div, beginning with 0kHz on the far left side of the display. Vertical scale = 10dB/div.)

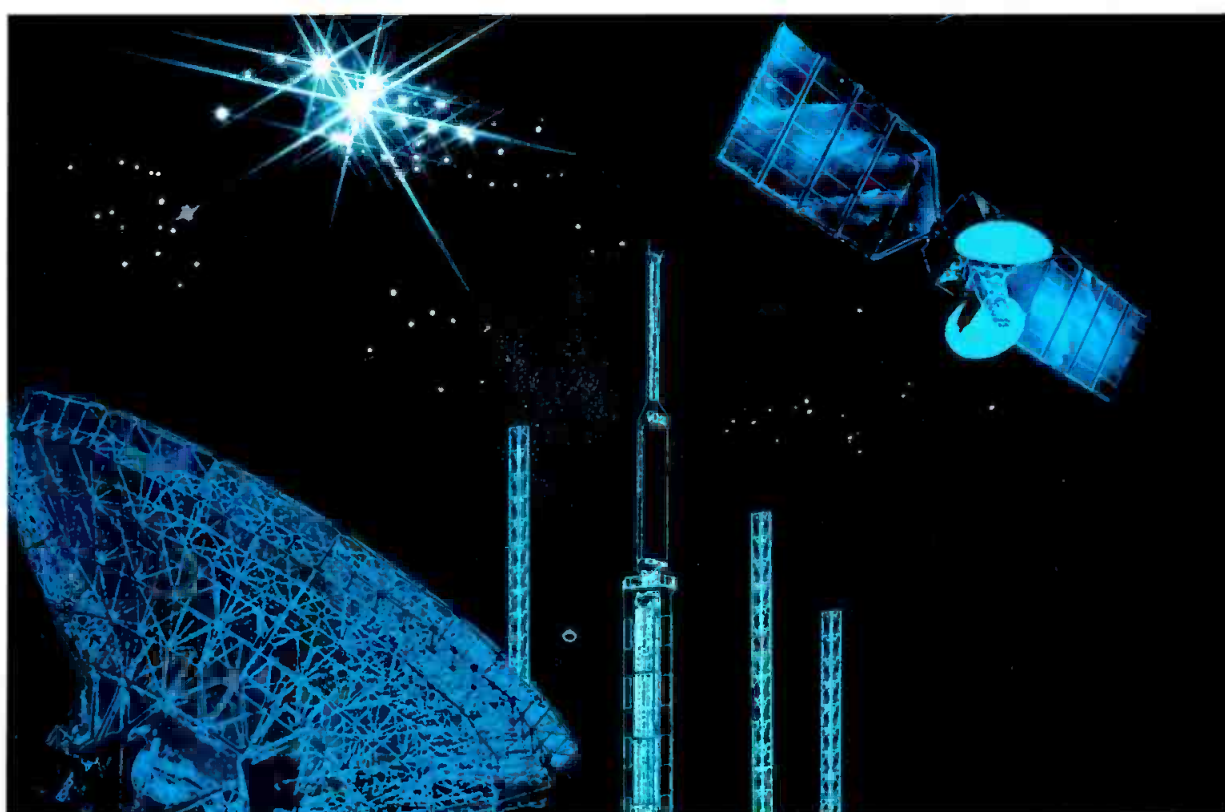

THE FURTHER WE GO, THE FURTHER YOU GO.


At Thomson-CSF we've been pioneers in developing the use of high-power tetrodes in transmitters for more than 70 years.

Over the years we've stayed ahead with such developments as Pyrobloc® grids and the Hypervapotron® cooling system.


We offer: A complete line of tubes for radio broadcasting applications from FM to the most powerful SW and LW transmitters – the quality of our 500-600 kW tubes has been amply demonstrated in 15 years of service in over forty transmitters worldwide.

A complete line of power grid tubes and their associated cavities for UHF/VHF TV transmitters. Thanks to their efficiency, reliability and tight tolerances, systems makers can offer their customers substantially more cost-effective products.

Earth station tubes up to 18 GHz (1.5 kW) or to 3.35 kW (6 GHz).



High efficiency space TWTs (including 50 W and 100 W Ku-band for next generation DBS Satellites).



High power radio broadcasting tetrodes up to 1.2 MW.



A complete line of klystrons and TWTs for ground stations and space TWTs for direct broadcasting satellites (DBS) designed to last for at least a decade.

And we also produce high-resolution image pick-up tubes and devices (CCDs), and high-luminosity CRTs for top range professional applications.

In radio and television, telecommunications, military and civil aviation, as well as in a wide range of scientific and medical applications, Thomson-CSF know-how gets your systems moving. Fast.


The world's most powerful tubes for radio and TV broadcasting.

Circle (78) on Reply Card

UHF and VHF tetrodes up to 50 kW. FM tetrodes up to 100 kW.



Matched cavities for best results.



THOMSON-CSF
ELECTRON TUBES

THOMSON ELECTRON TUBES
AND DEVICES CORPORATION
550 Mount Pleasant Avenue
P.O. Box 6500
DOVER, NEW JERSEY 07801.
Tel.: (201) 328-1400. TWX: 710987 7901.

Belgique: BRUXELLES
Tel. (32 2) 648 64 85
Tx 23 113 THBXL B

Brazil: SAO PAULO
Tel. (55 11) 542 47 22
Tx (011) 2-276 TCSF BR

Canada: MONTREAL QUEBEC
Tel. (1 514) 288 31 48
Tx 5560 248 TESAFI MTL

Deutschland: MÜNCHEN
Tel. (49 89) 78 79 0
Tx 572 916 CSF D

España: MADRID
Tel. (34 1) 405 16 15
Tx 46 033 ECCE E

France: BOULOGNE-BILLANCOURT
Tel. (33 1) 46 04 81 75
Tx THOMTUB 200 772 F

Italia: ROMA
Tel. (39 6) 639 07 48
Tx 670 683 THOMTE I

Japan: TOKYO
Tel. (81 3) 264 63 46
Tx 2374 241 THCSF J

Sverige: TYRESÖ
Tel. 146-81 742 0210


United Kingdom: BASINGSTOKE
Tel. (44 256) 29 155
Tx 858 865 TESAFI G

U.S.A.: DOVER
Tel. (1 201) 328 1400
TWX 710987 7901

WHAT HAS 5 VTR'S,
2 ROBOTS,
3 ROTARY LIBRARIES,
1,184 CASSETTES,
A COMPUTER,
THE ABILITY TO PLAY
15-SECOND SPOTS
BACK TO BACK
CONTINUOUSLY,
IS AVAILABLE NOW,

AND IS SURE TO TURN
THE BROADCAST INDUSTRY
UPSIDE DOWN?

ANSWER: THE MII M.A.R.C. SYSTEM CART MACHINE.

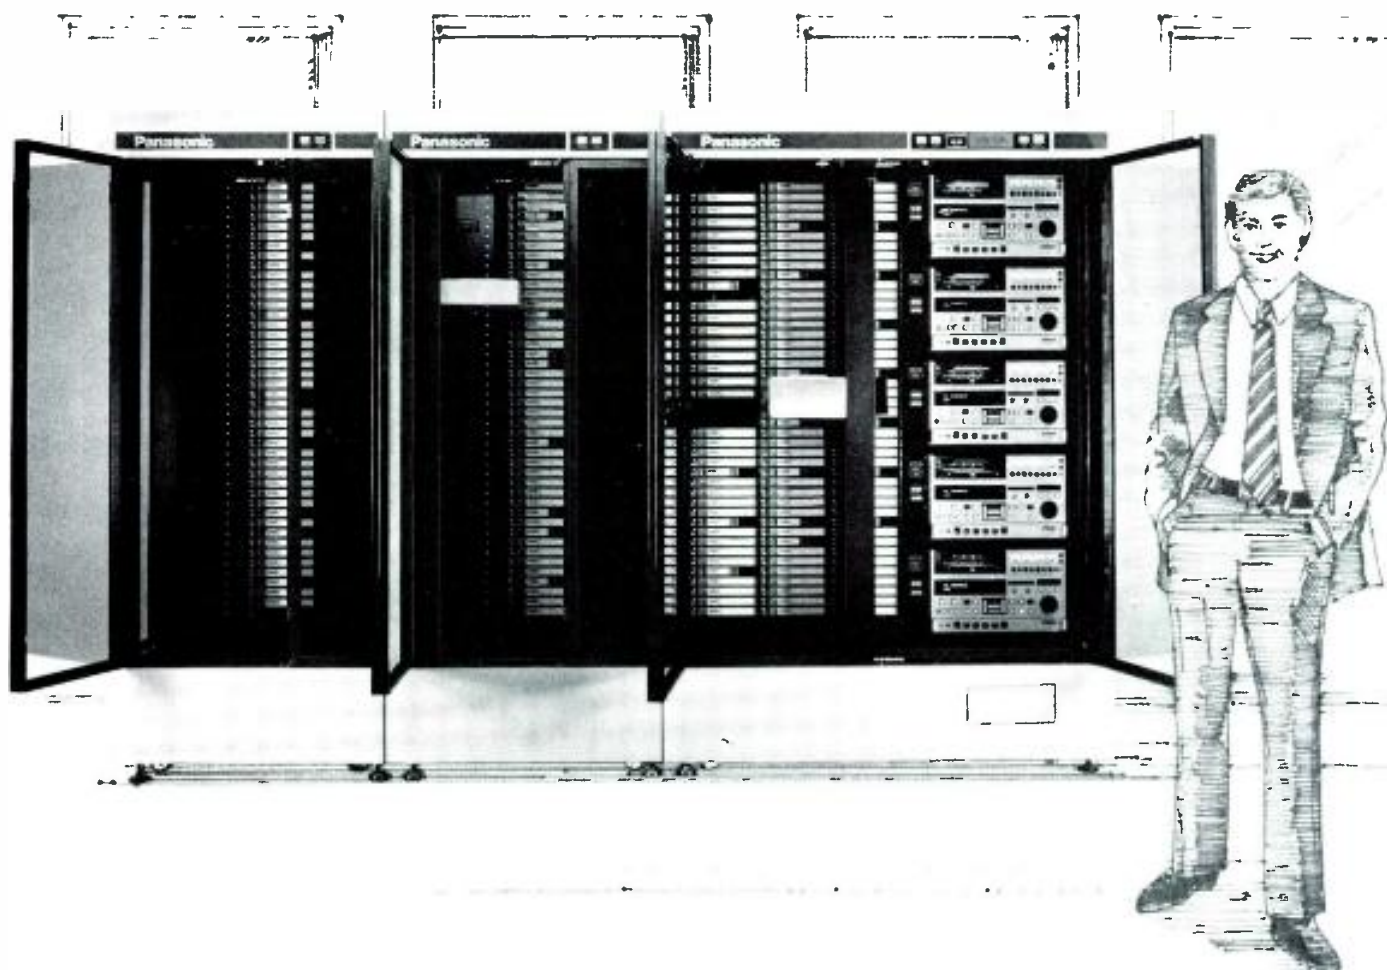

It's probably the most technologically advanced cart machine ever created. So advanced, we doubt the competition will have anything like it for a long while to come.

But the really impressive thing is: **it's available now.**

So give us a call if you'd like a demonstration, or to be put on our priority delivery program.

Remember, if you're looking for high broadcast quality, overall cost reductions and the finest support programs in the industry, look into MII from Panasonic.

The broadcast system that makes business sense.

MIIPanasonic
Broadcast Systems Company

For more information, call 1-201-348-7671.

WE BUILD STRONG TOWERS

While Express Tower Co. (EXCO) specializes in the design, engineering and construction of guyed towers in the 1,000-foot and above range, they have to be built right — and stand up to the toughest conditions.

For example, we're building a 995-ft. tower that will support a 46-ft., high-power UHF television antenna for KLTJ-TV, Channel 57, near Houston, Texas. It will also support a 12-bay FM antenna. And the tower is designed to withstand wind velocities in excess of 160 mph and to meet EIA-222-D specifications.

For complete tower services, including maintenance, repair, painting and replacement of antenna and transmission lines, contact Dyke Dean, our marketing director. Tell him your construction requirements and we'll build you a tower strong enough to meet or exceed *your* needs!



**EXPRESS
TOWER CO., INC.**

Star Route East
P.O. Box 37
Locust Grove, OK 74352
918/479-6484
Telex No. 62295660

Quality from the ground up.

Circle (80) on Reply Card

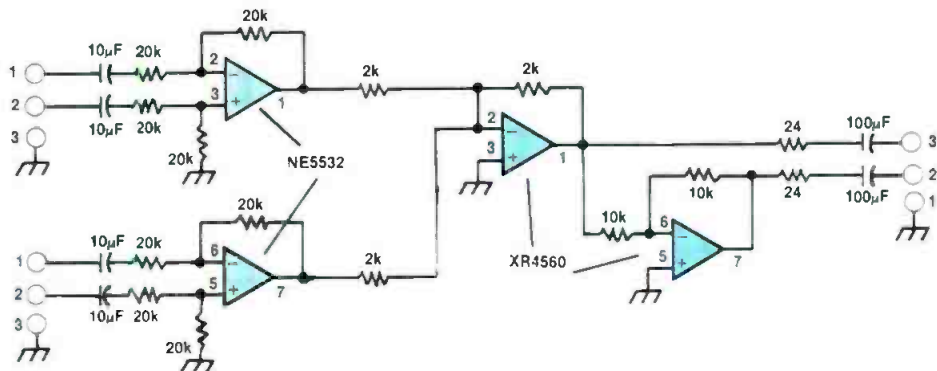


Figure 2. An active summing amplifier circuit used to check the mono compatibility of two audio channels.

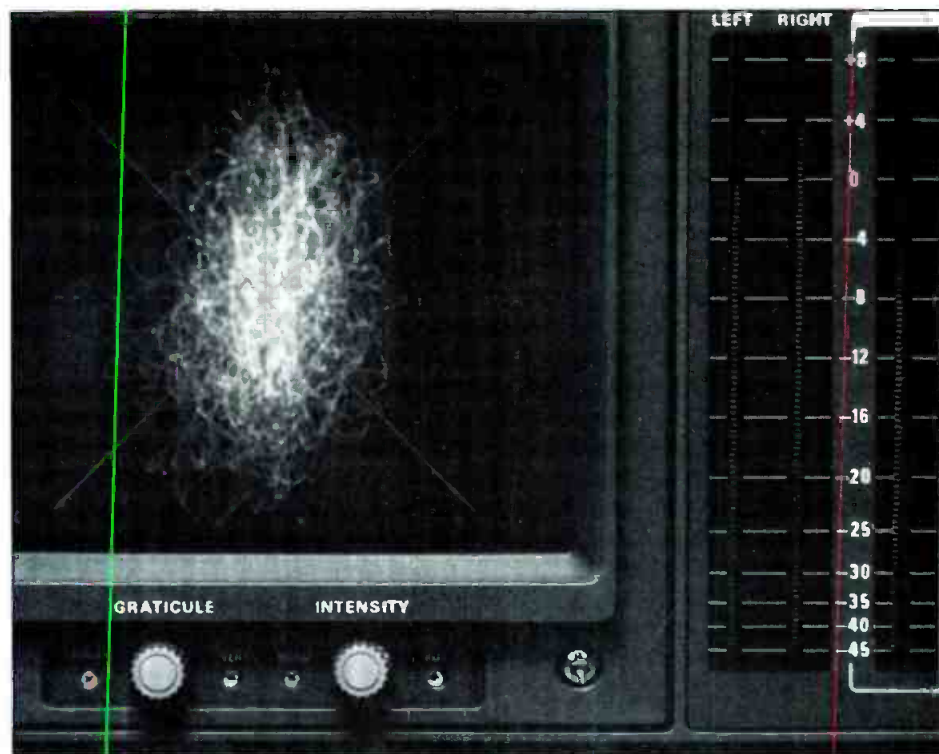


Figure 3. Front-panel controls and display for a stereo audio waveform monitor featuring left, right and sum amplitude readouts.

Continued from page 106

The audio vectorscope

Probably the most important piece of TV stereo test equipment is the audio vectorscope. The display on the instrument is a *Lissajous pattern*. It relates the amplitude and phase of the left and right channels. With experience, you can learn much about audio signals at your plant just by observing the pattern on this instrument.

Some audio vectorscopes also have meters for left, right and sum or difference levels. This combination of metering and pattern display is useful for monitoring and locating compatibility problems quickly. See Figure 3.

Continued on page 114

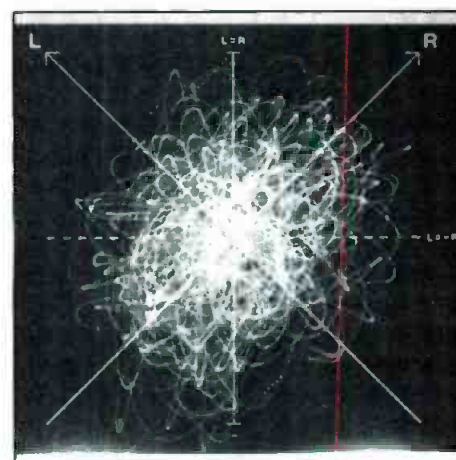


Figure 4. Audio vectorscope display for stereo programming of symphonic music. Note that little correlation exists between left and right audio channels.

B R O A D C A S T I N G

PERFORMANCE



KBPI-FM, 105.9 Denver, Colorado
A Sandusky station. Laurie Richardson, D.J.
Lynn Osburn, Chief Engineer. Studio design
furniture, and Series 10000 Console by
Howe Technologies.



Broadcasting Performance

is enhanced by HoweTech's complete line of consoles which possess unmatched sonic quality, described by many as the best in the industry! Consoles of all sizes, elegantly housed, assure easy installation, maintenance, and operation.

Broadcasting Performance

is guaranteed when a HoweTech Phase Chaser (patent pending) is on line, correcting and eliminating phase errors, regardless of source, enabling you to trans-

mit a perfect stereo signal for the appreciation of your listeners, and permitting you to boast of the quality of your signal, and the sophistication of your engineering staff.

Broadcasting Performance

is improved when your air talent function at their best. HoweTech designs and builds studios and studio furniture. HoweTech's *custom production* approach to design and fabrication, coupled with ergonomic and architectural planning from an inter-

nationally known industrial design firm, bring to your project beauty, functional efficiency, cost effectiveness, flexibility, and originality.

Broadcasting Performance

improves when you call Terry Sweeney or Doug Sutherland at Howe Technologies. 1-800-525-7520!


Howe Technologies Corporation

2300 Central Avenue
Boulder, Colorado 80301
303 444-4693

Circle (81) on Reply Card

www.americanradiohistory.com

“WHEN OUR TRANSMITTER STOPPED...EXCEPT TH

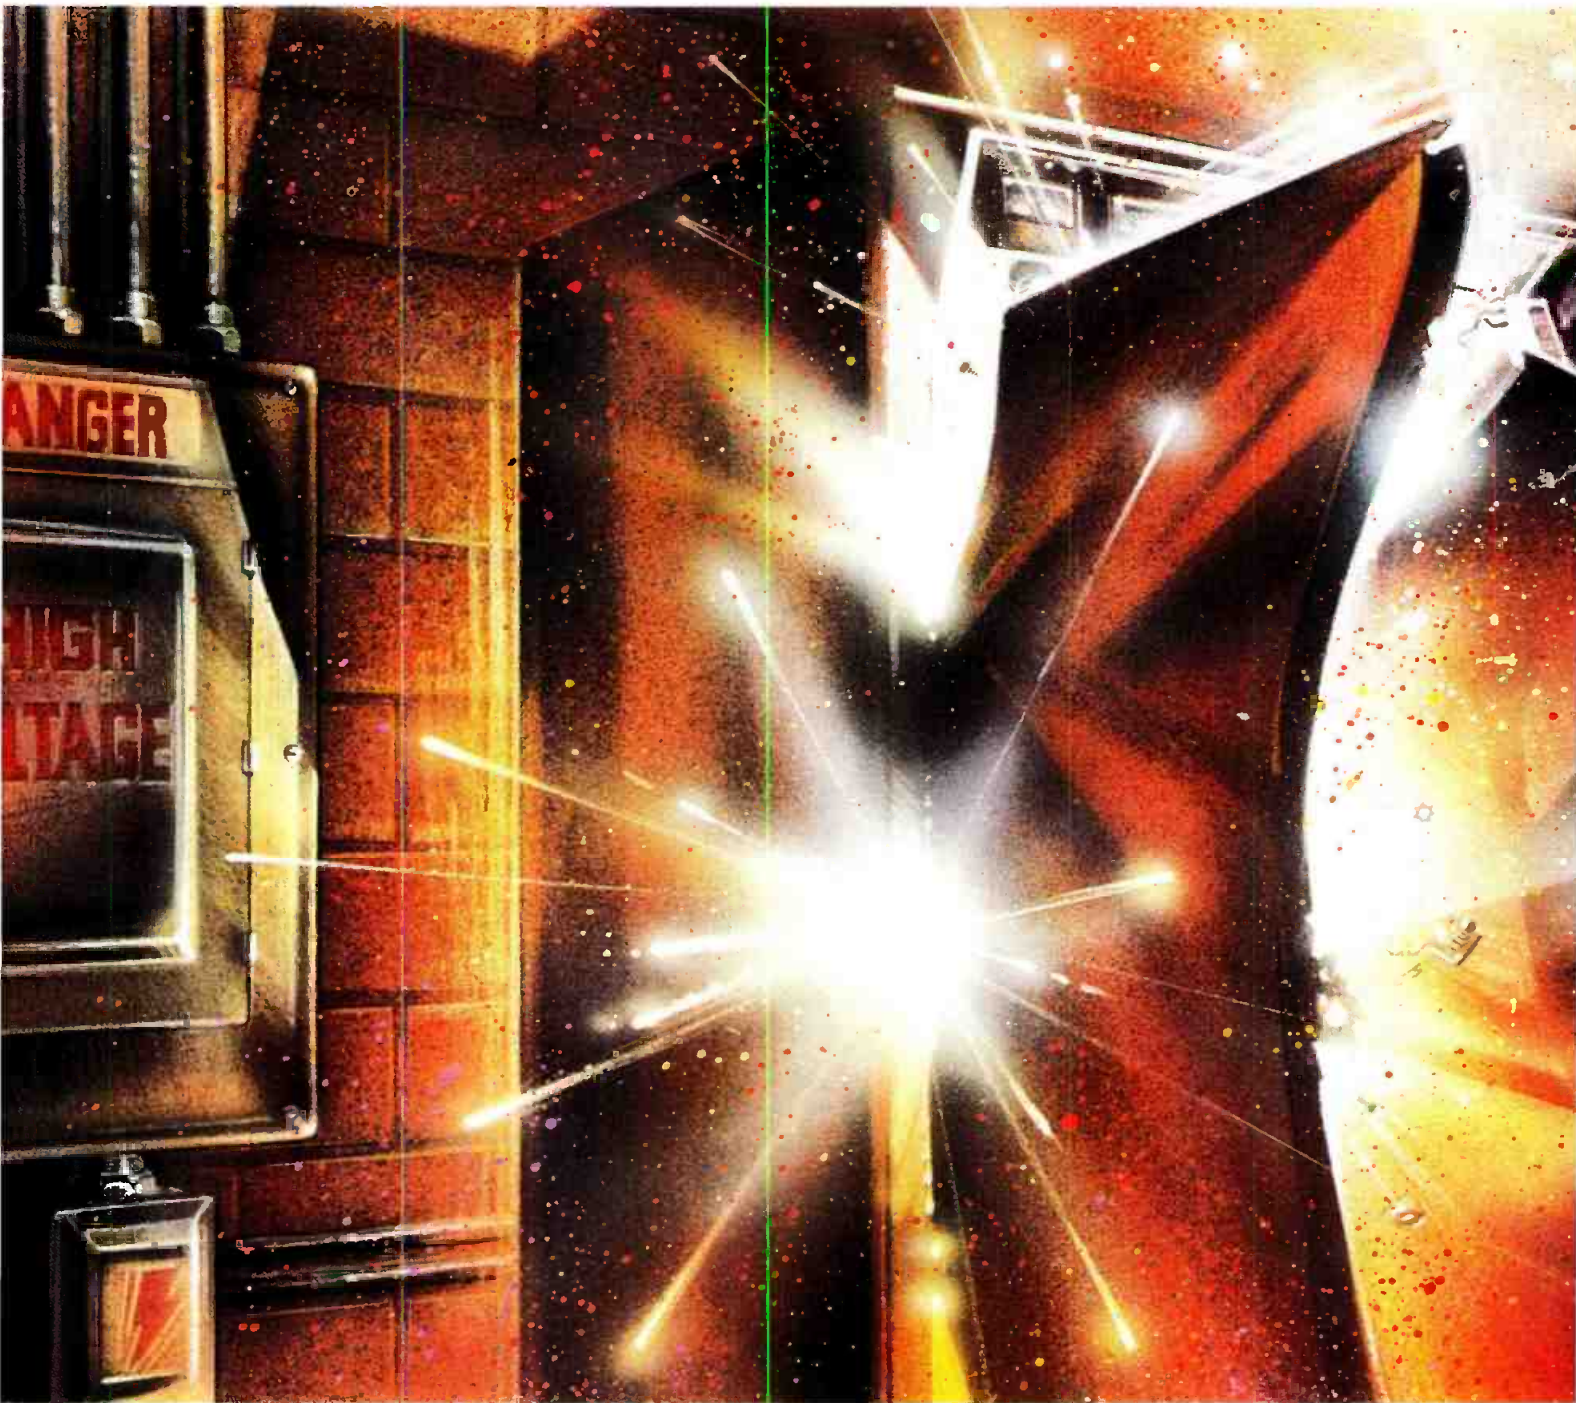

Chattanooga. January 26, 19
WTVG's transmitter — from a H
competitor — exploded. Doors
blew away. Quarter-inch-thick st
steel melted. And Channel 9 we
off the air.

Working through the night i
subzero weather, Director of En
neering and Broadcast Operatio
Manager Dennis Brown and his
staff would bring the station to l
power in 18 hours. But less pow

BLEW UP, EVERYTHING EXPENSES"

F. Lewis Robertson
Vice President/General Manager,
WTVB



I meant less revenue. They needed a replacement fast . . . in days rather than 30 weeks. Says down with a smile, "We knew if anyone could, Harris could."

The day after the accident, a Harris rep was on site. Assessing damage. Identifying needs. Rolling up the sleeves to pitch in. And F. Lewis Robertson gave the go-ahead, a new Harris transmitter was in place and operating just 30

days after the order. Channel 9 was back on the air at full power . . . with a picture viewers felt was better than ever!

At Harris, we understand the special pace and requirements of the broadcast industry. We've responded fast and effectively to our customers' needs for over 65 years. Supplying a full line of transmitters, antennas, control systems, and other high-quality communications products.

So when your signal goes up in smoke, depend on Harris to put you back on the air. For the full story, and your free *On The Air* poster, call us today TOLL FREE:

1-800-4-HARRIS, extension 3003.

 **HARRIS**

Circle (82) on Reply Card

Continued from page 110

The compatibility question

Now that you have a device for observing stereo audio, you can see more easily why TV stereo presents such a challenge for mono compatibility. Figure 4 shows a pattern typical of symphonic music. The

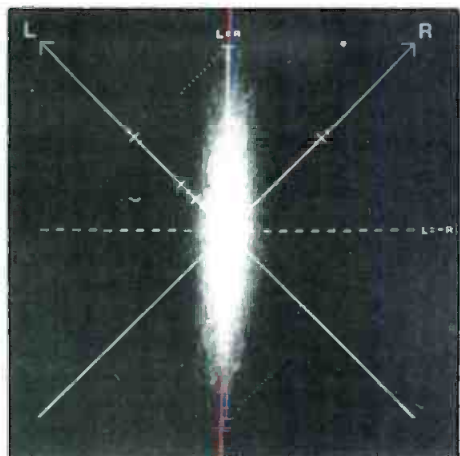


Figure 5. Audio vectorscope display configured as in Figure 4, but with programming typical of most stereo dramas or comedy shows. Note the high correlation between left and right audio channels.

pattern is almost circular, with little correlation between channels.

Figure 5 illustrates a pattern from a typical stereo entertainment program. Note that the stereo signal looks almost like mono. The channels are highly correlated. Most of the dialogue is in the center, and the music and sound effects have limited separation.

TV stereo audio is mixed this way to match the small size of the average TV screen. Your viewers don't want gunshots in the kitchen and car crashes in the bedroom! Because the material in both channels is so similar, any phase or delay errors result in some cancellation of the mono sum.

So the first rule of mono compatibility is this: Highly correlated stereo audio

demands identical processing in each channel in order to sum to acceptable mono.

Ensuring mono compatibility

The biggest potential problem facing broadcasters who are converting to stereo is wiring polarity error. If the polarity of one channel is reversed with respect to the other anywhere along the audio chain, most of the correlated (center) audio information will disappear from the mono sum. Because a station could have hundreds of audio wiring connection points, your plant probably has some built-in polarity errors. The penalty for inverted polarity was not too great in the monaural past, but that's not the case today.

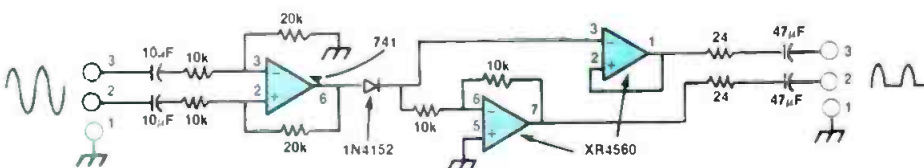


Figure 6. A sine-wave clipper circuit used to generate a test signal for checking polarity inversion in a stereo plant.

You'll meet your match with our

EDITING CONSOLES

No matter what VTR equipment you use, Winsted offers Editing Consoles to match your requirements! Our designs are based on consultations with professional users like yourself.

You've chosen your VTR equipment carefully, to meet your specific needs. Now choose the Editing Consoles that fit your equipment - quality consoles from Winsted.

For our free full-color FULL-LINE CATALOG call us toll free:

800-447-2257
TELEX: 510-601-0887

Winsted

10901 Hampshire Ave. So.
Minneapolis, MN 55438

FAX: 612-944-1546

Circle (83) on Reply Card



NIGHTLINE

TIME: 02:00:00 a.m.
PLACE: Swedish Telecom,
Malmö, Sweden

..... Seconds later

The link to Stockholm has been checked for phase, level, crosstalk, THD and noise. Even a spectrum analysis has been performed - fully automatically, thanks to the

RE201 Dual Channel Audio Analyzer.

Meanwhile 55 other RE201's tested another 55 transmission links and transmitters all over Sweden. These testing sequences are part of the SOVIM project, a fully automatic test system, used for testing the complete distribution and contribution radio link network in Sweden.

Swedish Telecom has chosen the RE201 Dual Channel Audio Analyzer for this application due to its speed, FSK signaling capability (Frequency Shift Keying), complete range of audio testing, built-in spectrum analysis, and the instrument's ability to fulfill CCITT recommendation O 33 for automatic testing of international transmission lines.

How do you check your links?

Do you want to know more about the RE201 Dual Channel Audio Analyzer and RE INSTRUMENTS' comprehensive product line including:

- RDS Coders and Generators
- FM/PM Stereo Coders and Generators
- Synthesized Signal Generators
- Component Test Equipment
- Car Stereo Test Systems

Please contact

RE INSTRUMENTS CORPORATION
31029 Center Ridge Road, Westlake, Ohio 44145
Telephone (216) 871-7617 Telefax (216) 871-4303

re

Circle (84) on Reply Card

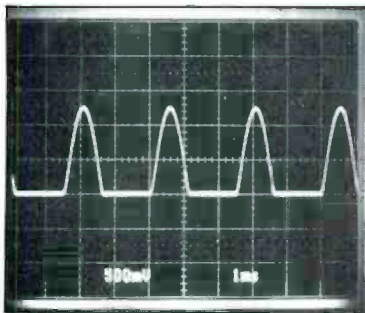


Figure 7. The output waveform of the sine-wave clipper circuit shown in Figure 6. When checking for polarity inversion in a stereo facility, keep in mind that two polarity inversions will yield a waveform that appears to be correct, but is not.

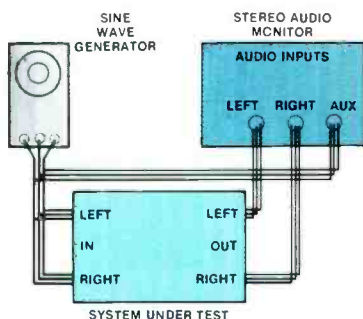


Figure 8. Test setup for checking the relative phase of two audio channels in a unit under test. Check for phase errors in all equipment through which the audio signals will pass.

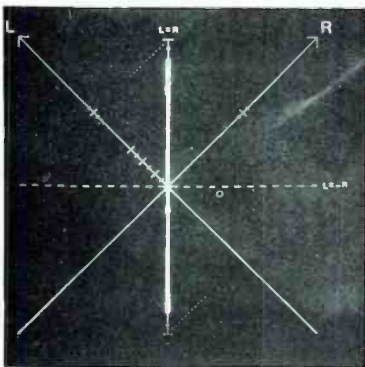


Figure 9. The ideal display from a relative-phase check of two audio channels, configured as described in Figure 8. The display is a vertical line indicating (on this type of monitor) two signals matched in amplitude and phase.



GLOBAL SUPPORT FOR GLOBAL COMMUNICATIONS

C-Band, Ku-Band and D.B.S. High Power TWT Amplifier Systems

For Video, Voice and Digital Communications
50-3000 Watt



Designed exclusively for satellite earth station use, MCL's High Power TWT Amplifier Systems meet the demand and discriminating stringent requirements for maximum signal purity and uncompromising reliability. All MCL amplifiers share commonality in operation, design and mechanical layouts to facilitate interchangeability and to minimize maintenance and repair. MCL equipment is designed upon worldwide to operate at optimum efficiency . . . even in the most remote, unattended locations and under the most adverse conditions.

MCL offers a host of C-Band, Ku-Band, and D.B.S. High Power TWT Amplifier Systems featuring:

- Double Drawer Amplifiers (300 to 750 C, Ku and D.B.S. Band)
- Single Drawer Amplifiers (50-300W Ku; 75-700W C-Band)
- Single Cabinet Amplifiers (2.5K-Ku; 3KW-C-Band)
- Special Tube/Helix Protection Measures
- Amplifier Performance Readout/Control
- High Voltage Component Protection
- Build-in "Remote" Capability

Turn to MCL for high quality, competitively priced satellite communications equipment of truly unequalled performance . . . guaranteed.

Technical specifications and details on the complete line of MCL C-Band, Ku-Band, and D.B.S. High Power TWT Amplifier Systems may be obtained by writing or calling MCL today. Simply request your complimentary copy of MCL's New, comprehensive Brochure #6008.







MCL

MCL, INC.
501 S. Woodcreek Road
Bolingbrook, IL 60439
312-759-9500 TWX 910-683-1899

Manufacturers of TWT and Klystron Amplifiers for Satellite Communications.
24-Hour Sales and Technical Support for Immediate Service Worldwide.

Circle (85) on Reply Card

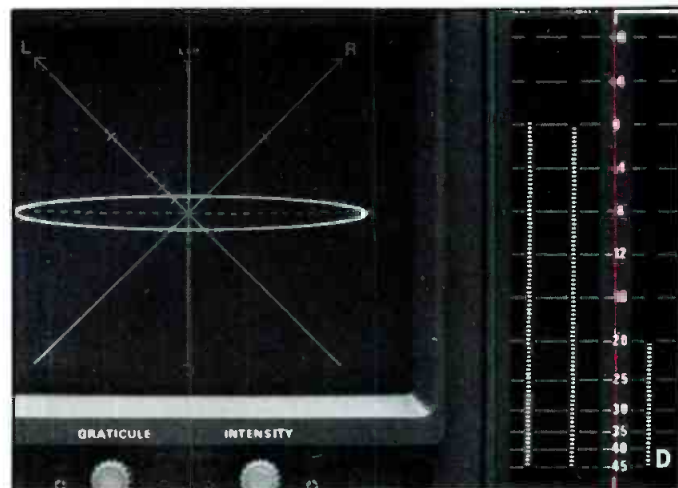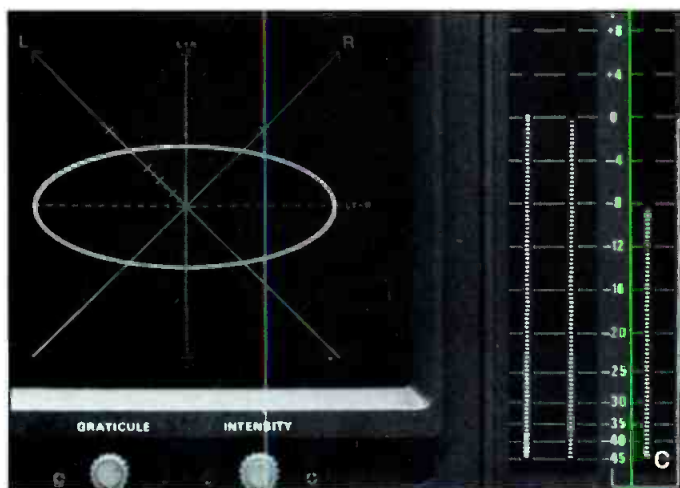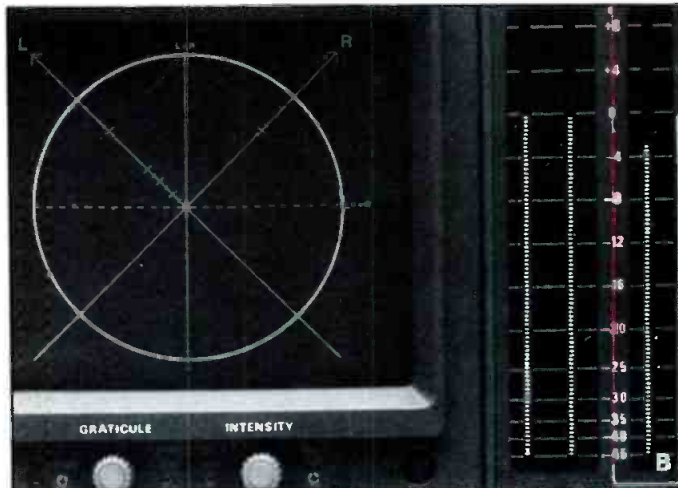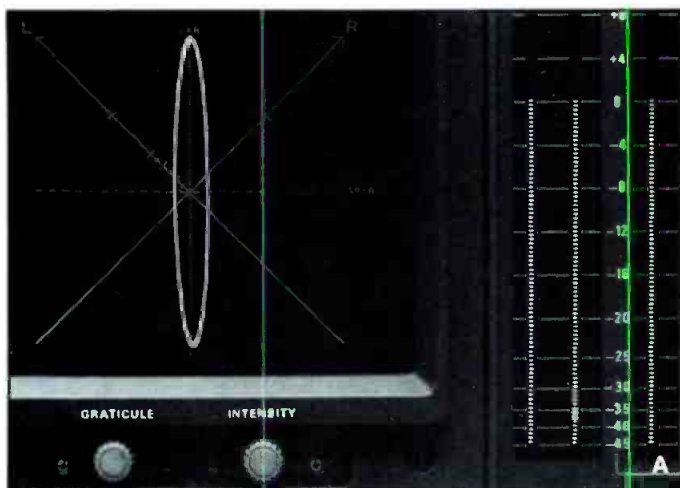

STOP GROUND-LOOP HUM!

VIDEO HUM STOP COIL...HSC 1

Will ELIMINATE HUM and other INTERFERENCE in Video Lines caused by differences in Ground Potential.

- For Color and Black and White.
- FLAT-DC to 6.5 MHz.
- No Low-Freq. or Hi-Freq. Roll-off.
- No Differential Phase Distortion.
- No Differential Gain Distortion.
- No Envelope Delay.
- Passive Device - Failure Free-Low Price.
- Small Compact Package 4" x 4" x 2-1/4".


ELIMINATES HUM AND INTERFERENCE:

IN STUDIO

- Between Buildings
- On long runs in Buildings
- Between Studio and Transmitter
- On Incoming Telco circuits
- On Outgoing Telco circuits

IN FIELD

- Betw. Remote Truck and Telco
- Betw. Remote Truck and Microwave
- For Intertruck Hookup
- For VTR Units
- For Monitoring Lines



NEW!

\$190
F.O.B.
N.Y.



Available on
10 day free trial

AUDIO-VIDEO ENGINEERING COMPANY
65 Nancy Blvd., Merrick, N.Y. 11566
Tel. (516) 546-4239


Circle (97) on Reply Card

Live Assist and more!

CABS delivers an integrated Computer Aided Broadcasting System from Library Maintenance to Analysis of Aired Events.

- Music and commercial library management
- Sophisticated programming and scheduling criteria
- Live assist with full control of audio peripherals

- Announcer information, live tags and schedule enquiry
- Analysis of formats, aired events and their relationship to station ratings.

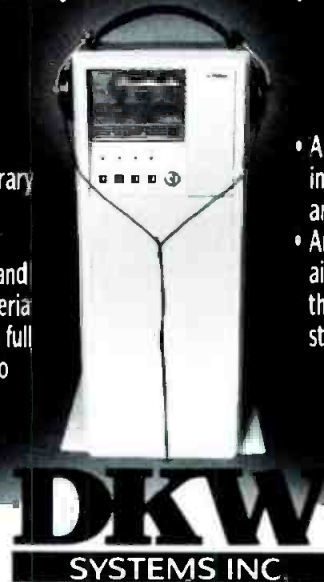

DKW SYSTEMS INC.
#730, 9919-105 Street
Edmonton, Alberta Canada T5K 1B1
(403) 426-1551

SMALL WONDER - WE WORK 24 HOURS EVERY DAY WITHOUT A BREAK!

Circle (87) on Reply Card

TAPE MACHINE TESTING AND LOTS MORE!

Figure 10. Audio waveform displays for a stereo channel with varying degrees of relative-phase error. Photo (a) shows a phase differential of approximately 10°. Photo (b) shows a phase differential of approximately 45°, with sum-channel audio response down 3dB. Photo (c) shows a phase differential of approximately 135°, with sum-channel audio response down 9dB. Photo (d) shows a phase differential of approximately 190°, with sum-channel audio response down 21dB. Note that two audio signals perfectly matched in amplitude and 180° out of phase with respect to each other will result in cancellation when summed to mono.

Here's a technique for locating wiring polarity errors. Apply a clipped sine-wave test signal to the input of your system, one channel at a time. The circuit shown in Figure 6 will convert your house sine-wave tone into what you need. Figure 7 shows how the signal should appear on an oscilloscope. Use this signal to probe along both audio signal paths. With the scope connected to the positive phase of the line, the half sine wave should point up. If it points down, the polarity has been inverted.

It is important to check the wiring at any point where a new connection is made. Two polarity errors will cancel each other until a patch is made or until the audio system is modified (for whatever reason). Dual polarity errors compound the difficulty of preserving monophonic compatibility during the rapid pace of a typical broadcast day.

Some stations carry this testing procedure further and check (and rewire as necessary) all audio-processing equipment to eliminate input-to-output polarity inversion. When all polarity errors have been removed from the facility, you can be assured that the audio system will function properly when equipment is removed or replaced.

Phase errors

Now that you have found and corrected your polarity errors, let's turn to the second type of compatibility problem: phase errors. As illustrated in Figure 1, zero relative-phase error (ideally) is needed between the left and right channels in order to accomplish satisfactory mono TV sound.

Phase is simply a way of describing delay in other terms. When one channel has a bit more delay than the other, and the same signal is sent down both channels, the delay can be measured through observation of the relative phase of the audio at the other end.

This point is made so that you will consider all the possibilities for phase (delay) errors that might exist in your plant and

Tape machine testing is just part of Audio Precision System One's repertoire. For tape, System One does:

- response on stereo machines—or multi-tracks to 192 tracks
- distortion across the entire spectrum
- wow and flutter, rotational and scrape
- MOL
- SOL
- separation (worst-case crosstalk on multi-tracks)
- azimuth adjustments
- phase vs frequency
- gap scatter on multi-tracks
- spectral analysis of noise

ANALOG TAPE: System One tests VTRs, ATRs, reel-to-reel, cart, cassette formats—two or three head—using tapes you make or standard reference tapes, even with voice between tones.

DIGITAL TAPE: System One's -100 dB (0.001%) distortion levels make it the selection of the leading manufacturers of digital recording systems. Try measuring the -85 to -90 dB distortion 16-bit PCM systems with a test set with -75 dB residuals!

AND LOTS MORE: Audio Precision's System One tests all audio equipment in your inventory—compact disc players, consoles, power amps, distribution amplifiers, switchers, transmitters. Even acoustical tests on loudspeakers and microphones.

Features such as:

- three forms of imd including transient
- complete, automatic custom test procedures created without knowledge of programming languages
- fast on-screen graphic or tabular results
- low-cost graphic hard copy via dot matrix printers

make System One the most powerful choice in audio testing.

Call or write Audio Precision today for complete technical data and prices on System One.


Audio precision

P.O. Box 2209, Beaverton, OR 97075
503/627-0832 1-800/231-7350



Circle (88) on Reply Card

Figure 11. Audio spectrum-analyzer display of amplitude vs. swept frequency in a stereo audio system summed to mono. Note the deep cancellation that occurs at 5kHz and 15kHz. Discrete mono compatibility spot checks that did not include those frequencies could give a false indication that the system under test was operating properly. The notches shown were caused by a delay of approximately 100 μ s in one of the stereo channels. (Horizontal scale = 2kHz/div, beginning with 0kHz on the far left side of display. Vertical scale = 10dB/div.)

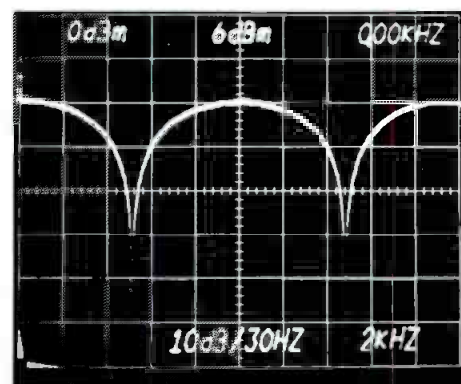

in the distribution system that delivers audio to your facility. Phase errors between stereo channels create errors in the mono frequency response.

Identifying phase errors

Detecting phase errors requires a high-quality audio generator and an audio vectorscope. Figure 8 shows how to con-

nect the output of the audio generator to both channels of the system under test. You can observe the outputs on an audio vectorscope as you vary the frequency of the generator.

Ideally, the response at all frequencies will be similar to the display shown in Figure 9. The display should be a vertical line indicating equal and in-phase left and right signals. Any phase error will show up as an ellipse on the audio vectorscope. If your scope also has metering, you can watch the sum amplitude to make sure it stays constant throughout the audio range. Note that some audio vectorscopes display 0° differential phase by a straight line at a 45° angle relative to vertical. The vectorscope display used in this article has 0° differential phase referenced as shown in Figure 9.

Figures 10(a-d) tie all this together. The mono frequency response of a system is shown along with audio vectorscope photos taken at critical differences in relative phase. These displays clearly illustrate the relationship between phase errors and monaural frequency response. Note that the left and right audio-level bars show good amplitude response in their respective channels, but the sum bar is influenced significantly by the relative phase between channels.

For a quick check of your system or of a remote feed, supply a swept frequency to both channels at one end, and observe the maximum phase excursion at the other end. An even faster check can be accomplished with a pair of discrete frequencies. If you use this test, choose the frequencies with care. Consider the response shown in Figure 11. If your tones were at 400Hz and 7kHz, you would not notice the notches present at 5kHz and 15kHz.


Because these tests are simple, they should help you to quickly locate and observe the common stereo audio problems that affect mono compatibility. These techniques will put you well on your way toward producing good stereo and good mono sound. |:~:~)))))

EXTEND YOUR LEVEL OF SUCCESS

The ATS-100 Stereo (dual channel) Extended Range Audio Meter is a self-contained audio measuring system. Dual "VU" meters provide precision visual monitoring. Peak Program Meters offer simultaneous level and peak monitoring.

The ATS-100 input sensitiv-

ity allows for a wide range of levels, from -60 to +30 dBm, and a visual indicator is provided for accurate phase measurement. The reliable, fully solid state amplifier and power supply, coupled with advanced micro-processor control, is assembled in a compact 3 1/2" rack mount frame.

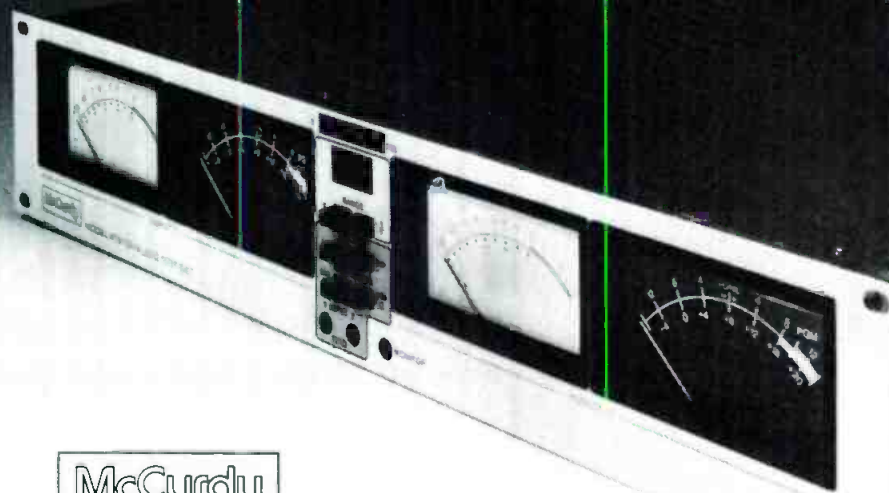

McCurdy

McCurdy Radio Industries

108 Carnforth Road, Toronto, Ontario
Canada M4A 2L4 Tel: (416) 751-6262
Telex: 06-963533 Telefax: (416) 751-6455
1051 Clinton Street, Buffalo, New York 14206
Tel: (212) 772-0719

Circle (89) on Reply Card



25000J
FM Transmitter

300J
FM Transmitter

Model X
FM Exciter

Silverline UHF
TV Transmitter

Silverline UHF
TV Transmitter

1000W UHF
TV Transmitter

100W UHF
TV Transmitter

FOR BROADCASTING EXCELLENCE... SOLID, POWERFUL, TELEVISION AND RADIO EQUIPMENT

High Power UHF TV Transmitters

TTC's Silverline UHF TV Transmitters provide the ultimate in picture quality, reliability and efficiency. These transmitters are designed that way, without compromise.

All new state-of-the-art design utilizes CMOS logic for control functions. Silverline multiple klystron transmitters maximize reliability by offering total redundancy. Each multiple klystron transmitter includes two or more amplifier cabinets, control circuits, high voltage contactors, beam supplies, cooling systems and exciters.

Low Power TV Transmitters

TTC offers a full line of outstanding UHF translators and transmitters, with an ultra-stable design that assures high quality, trouble-free operation.

For 100 Watt UHF TV, TTC offers a durable solid state translator-transmitter designed for worry-free unattended operation in remote and hostile environments.

The TTC XL1000 has become the best selling 1000 Watt UHF transmitter in the world. Long-term reliability, performance, advanced capabilities, and versatility for use with UHF, VHF, satellite, or video inputs provide you with assurance of lasting quality.

FM and AM Radio Transmitters

TTC has established a longstanding track record for producing highly reliable and durable FM and AM radio transmitters—combining unsurpassed value and performance.

A complete line of transmitters is manufactured including units with a power output of as low as 30 Watts and ranging upward to 40,000 Watts.


Featuring clean uncomplicated designs incorporating refinements developed from over twenty years of proven performance in radio stations worldwide, today's TTC radio transmitters provide unmatched price-performance value.

For product literature or further information, call or write:

TELEVISION TECHNOLOGY CORPORATION
P.O. Box 1385 • 2360 INDUSTRIAL LANE • BROOMFIELD, COLORADO 80020 USA
(303) 465-4141 • TWX: 910-938-0396 TTC ARDA • FAX (303) 469-9728

Circle (90) on Reply Card

**“...so I looked
competition bo**

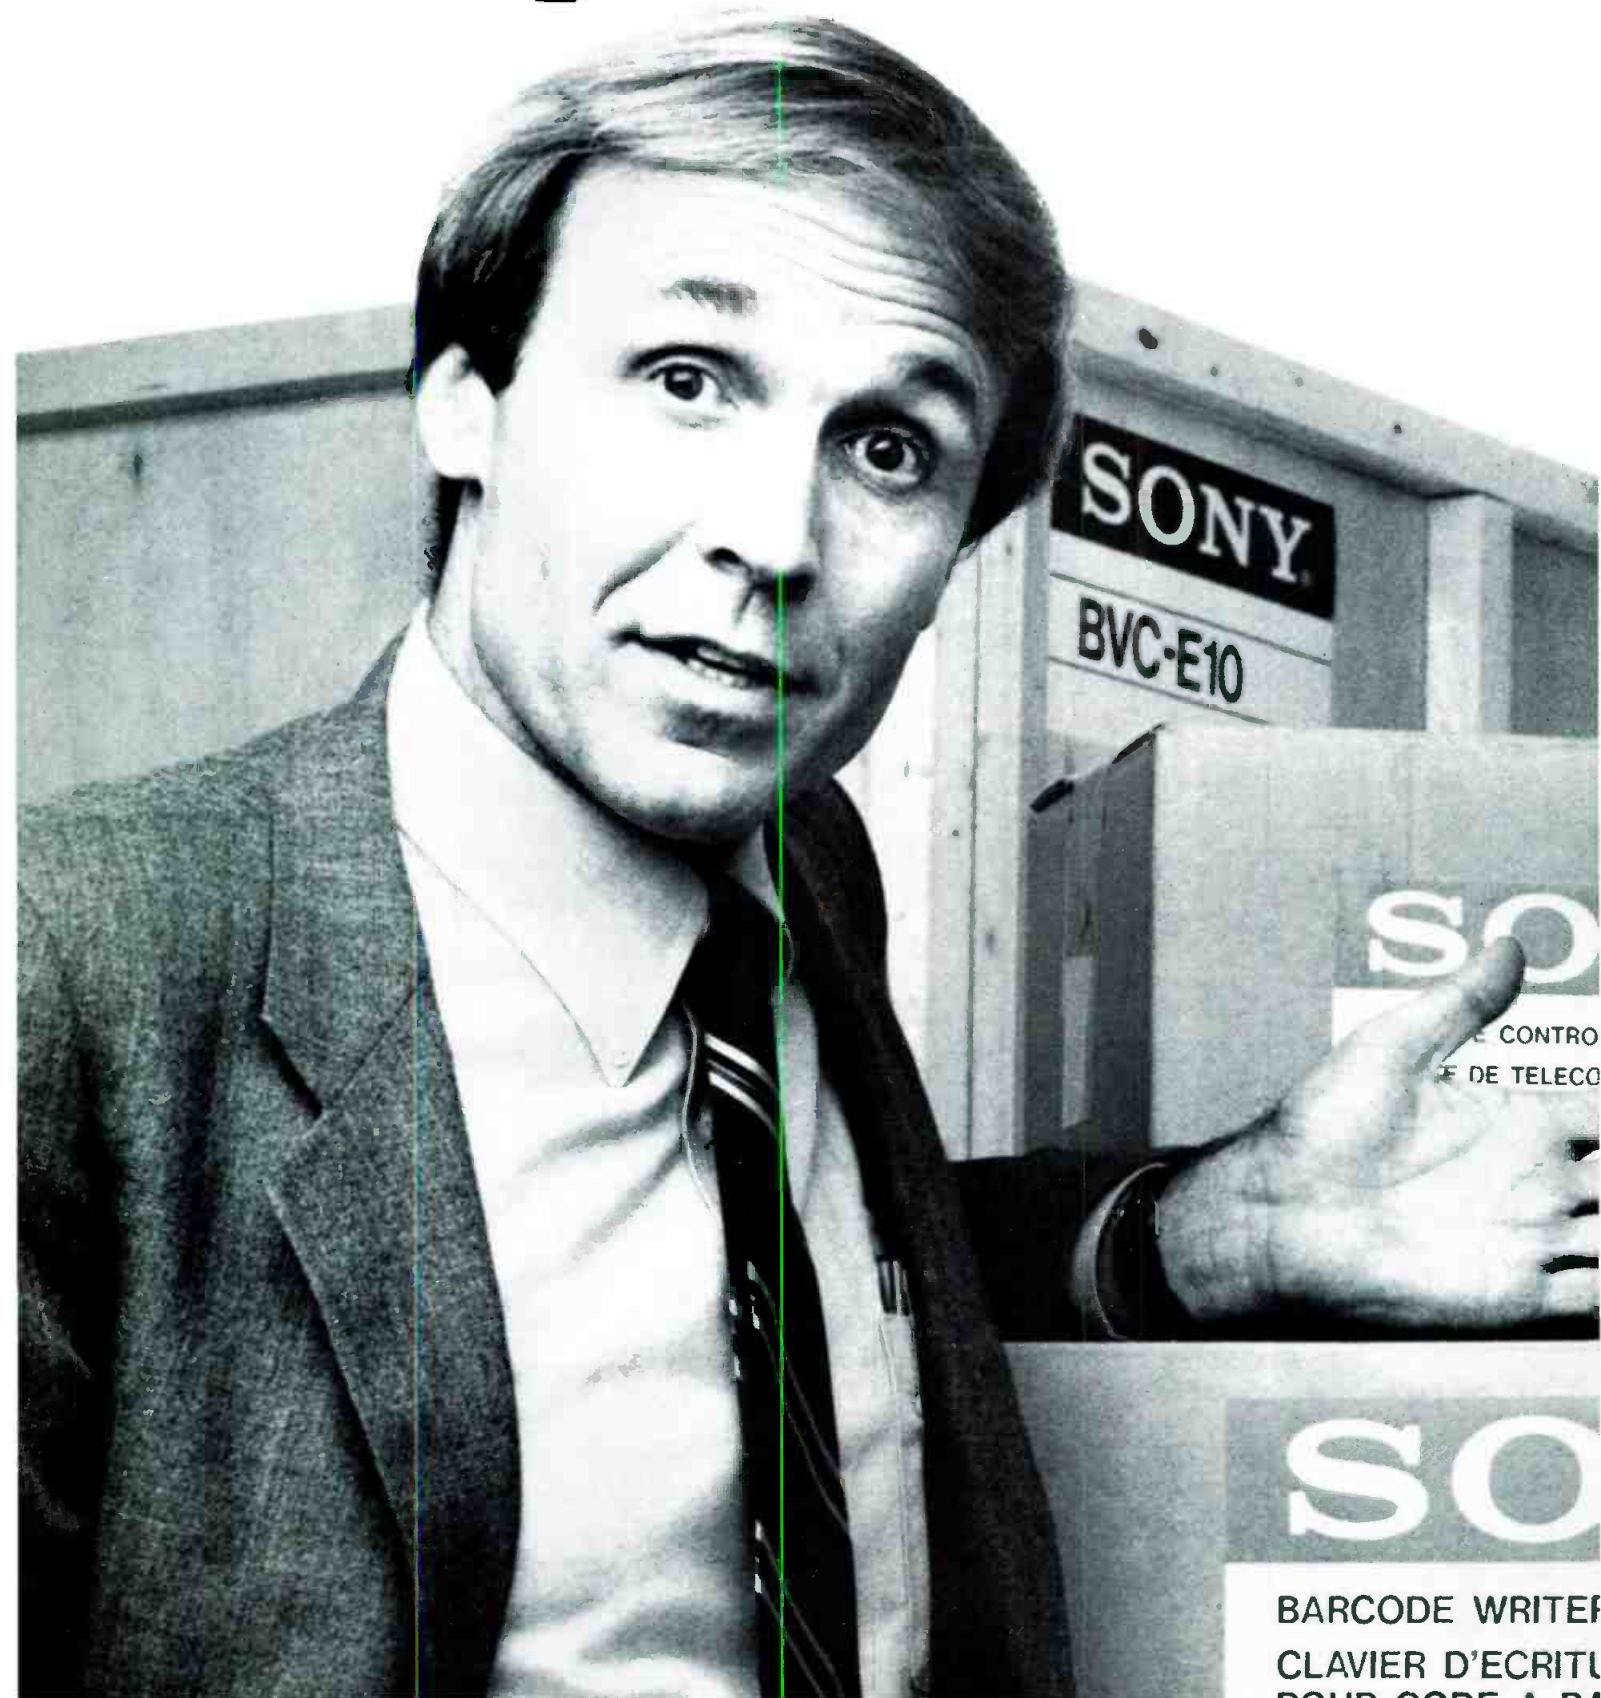

**BARCODE WRITER
CLAVIER D'ECRITURE
POUR CODE A BARRE**

at what the ught: Betacart, Betacart, Betacart."

Over one hundred and fifty Betacart™ systems have been delivered throughout the United States.

For names of stations in your area enjoying impeccable spot and news automation, contact your Sony Broadcast representative. Or call Sony Broadcast at 800-635-SONY.

SONY

Broadcast Products


Circle (91) on Reply Card



Binaural sound: Expanding on the image

By Claus Wittrock, M.Sc.E.E.

A variety of methods now exist for adding stereo sound transmissions to traditional terrestrial TV broadcasting around the world. These methods are in-

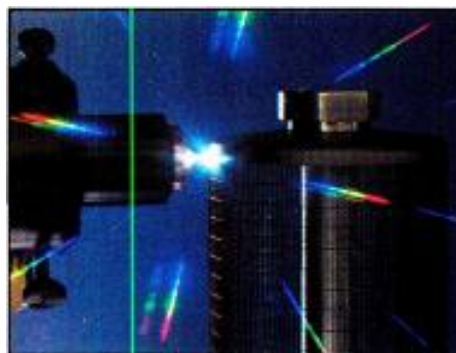

fluenced by a lack of bandwidth, by the amount and complexity of information carried in a TV transmission and by their compatibility with existing standards and

norms. Consequently, all known stereo systems are compromises between the desire for improving audio performance and the limitations the terrestrial broadcast system imposes.

The key concerns are minimum disturbances of adjacent channels, minimum increases in stress on transmission equipment and no degradation of quality when existing monophonic TV receivers receive the signal. Stereo performance, therefore, has to be achieved either within the traditional sound system or by an additional sound carrier. Sound-in-sync methods, or other ways of carrying stereo information within the video signal, require either extended bandwidth or complex packing, which is based upon digital reduction of the information and is equivalent to a loss of compatibility with existing terrestrial broadcast systems.

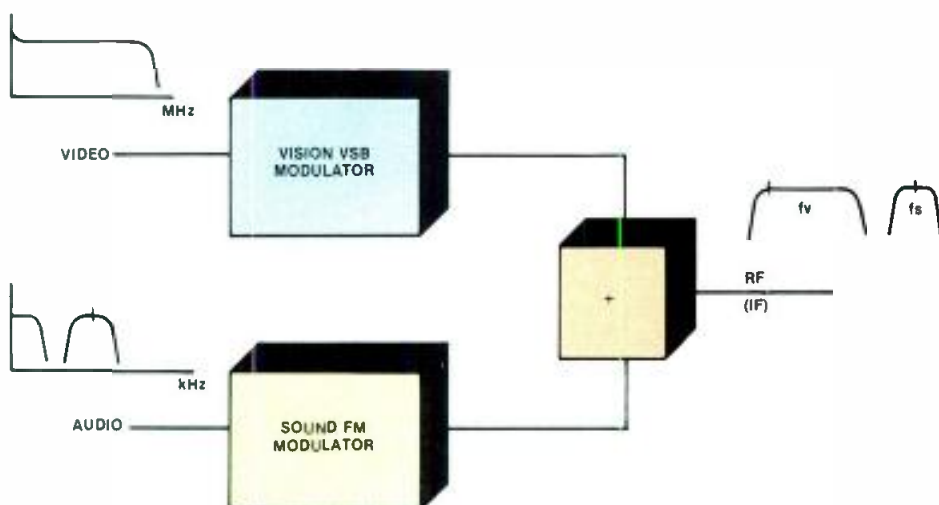


Figure 1. The general plan of single-sound carrier systems.

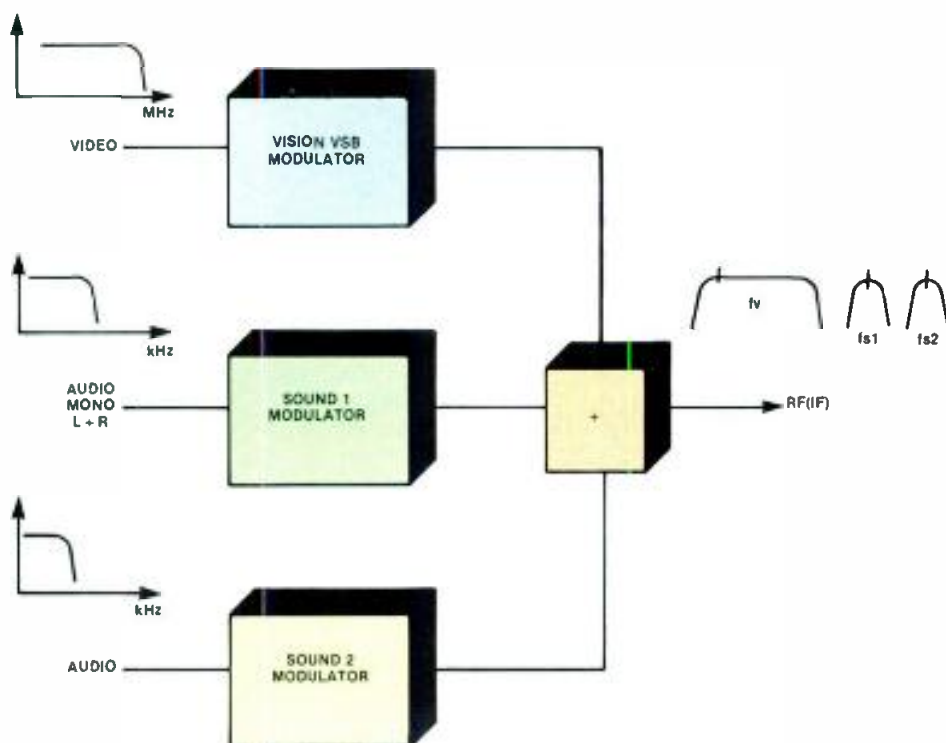


Figure 2. The general plan of dual-sound carrier systems.

Principles for stereo sound

In light of the constraints already noted, stereo quality must be obtained either through modification of the audio signal before transmission or by the addition of another carrier near one of the edges of the channel bandwidth allocated for the transmission. When analyzing the principles that have been described, we can classify them either as single-sound carrier (Figure 1) or dual-sound carrier (Figure 2) systems.

The first single-sound carrier BTSC variation is in operation in the United States and Canada. It features stereo and a second language and data transmission. The audio processing required in the transmitter and receiver is relatively complex (see Figure 3). The spectrum of the encoded audio signal is shown graphically in Figure 4. The BTSC companding scheme (compression during encoding, expansion in the receiver decoder) is based upon the Zenith/dbx processing circuit and makes use of both amplitude and frequency companding. The latter is implemented by using a level-controlled pre-emphasis curve.

Wittrock is development manager, RF TV products, Philips Professional Television, Copenhagen, Denmark.

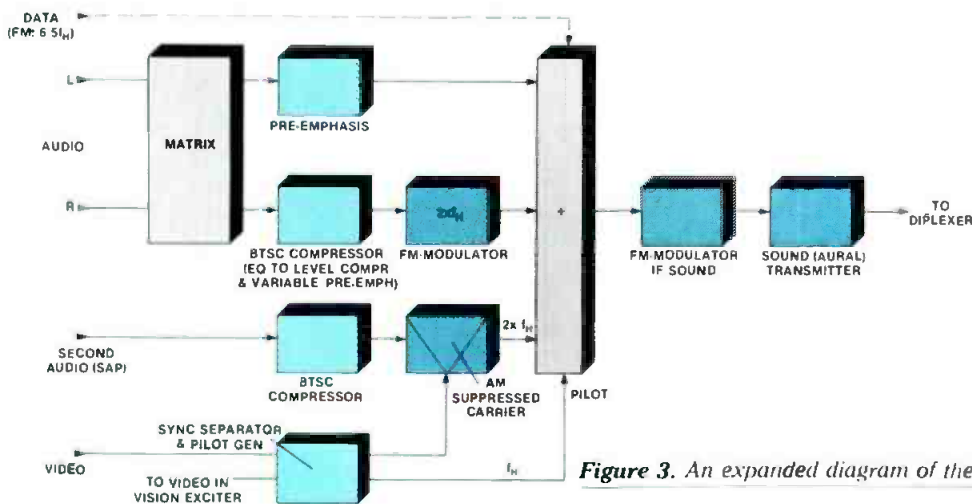


Figure 3. An expanded diagram of the BTSC variation of the single carrier.

A second variation of the single-sound channel approach is in use in Japan. (See Figure 5.) Although the FM-FM design has no direct facility for a second language, a low crosstalk level theoretically allows the left and right channels to carry two different languages.

Two basic principles also are found in the dual-carrier systems. The Institute für Rundfunktechnik (IRT) developed an analog variation, while the British Broadcasting Corporation (BBC) moved to a digital approach. The IRT system is in use in Germany, Holland and Austria and is being considered for implementation in Australia and Korea. (See Figure 6.) An identification signal at 54kHz is AM-modulated with a low-frequency signal to indicate a mode of mono, stereo or independent 2-channel (language) transmission.

The BBC's system operates with a digitally converted audio signal that is companded, interleaved and quadrature phase-shift modulated on the second carrier. Developed originally for England, the BBC approach has been accepted in Finland, Denmark, Norway and Sweden, although some modifications have been made. (See Figure 7.) The Nordic alteration features VHF (CCIR system B) operation, using an intercarrier frequency of 5.85MHz instead of 6MHz and other filters in the quadrature phase-shift keying (QPSK) modulator as a compromise between bandwidth and Eye height.

A closer look at QPSK

Of these systems, the BBC approach probably is the most difficult to understand, mainly because it is digital. Initially, the left and right signals are sampled at 32kHz. The resolution of the A/D conversion is 14-bit (maximum) digital word equal to an overload limit placed 12dB above the reference level, which indicates average peak program level. During baseband compression, the 14-bit word is reduced to 10 bits.

In this scheme, a group of 64 samples makes up a frame, while 32 samples comprise a block. Mono samples are placed in odd-numbered frames for language or channel 1, while those for language 2 are encoded into even-numbered frames.

When There's No Room For Compromise...

We have the Solution...

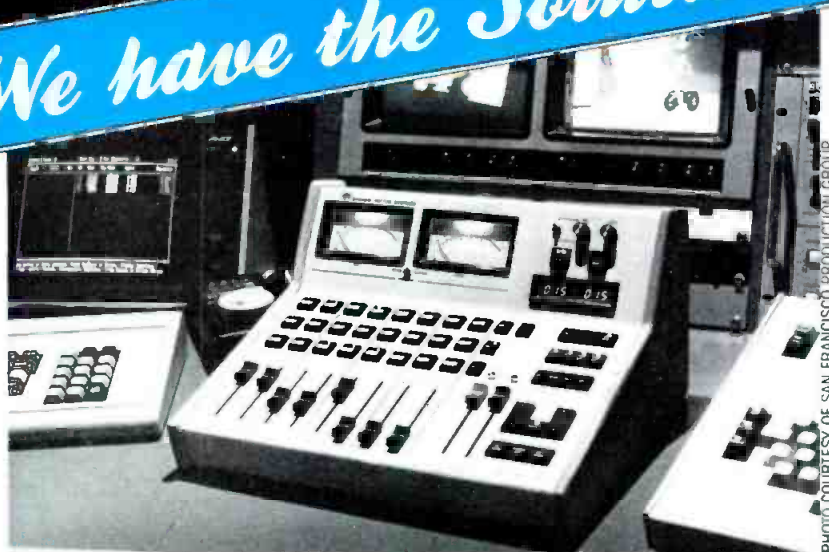


PHOTO COURTESY OF SAN FRANCISCO PRODUCTION GROUP

AN AUTOMATED AUDIO MIXER WITH A TRACK RECORD FOR RELIABILITY AND COMPATIBILITY.

The Model 608 Edit Suite Audio Mixer incorporates the features of our larger mixers into a smaller package, at a significant cost savings, without sacrificing quality or ease of operation.

Audio sources are controlled with the 608 in much the same way as video sources are controlled using a production switcher. This concept allows you to edit audio quickly, along with video or separately, using the same editing system.

Our proven editor interface, supported by most major edit system manufacturers*, allows hands-free control of audio mixing right from the editor. Yet, at any time the mixer may be operated manually or with a combination of manual and editor control.

The Model 608 has eight inputs, each with its own fader, with separate inputs for the record VTR and tone. Outputs are stereo for both the program channels and built-in preview switcher.

Call us for a complete brochure.

* mixers are currently in use worldwide with the following editing systems: Ampex Ace, CMX, Calaway, Convergence, Grass Valley Group, PALTEX, and other systems capable of operating a video switcher.



GRAHAM-PATTEN SYSTEMS, INC.

P.O. Box 1960, Grass Valley, CA 95945

Inside CA: (800) 422-6662 • Outside CA: (800) 547-2489

TWX 910-333-6065 • FAX: 916-273-7458

Circle (92) on Reply Card

November 1987 *Broadcast Engineering* 123

NEW! Wireless Clear-Com



6 Beltpacks— No Wires!

FCC Approved

- ▲ Clear-Com quality audio
- ▲ Extends range of wired system with up to six wireless transceivers
- ▲ Full-duplex, high band operation
- ▲ Developed for the professional user
- ▲ Exceptional RF performance — virtually transparent from the wired system

CONTACT YOUR
CLEAR-COM DEALER.
OR CALL/WRITE:

Clear-Com
Intercom Systems

1111 17th Street
San Francisco, CA 94107
415-861-6666

Circle (93) on Reply Card



RACKMOUNT STEREO AUDIO MONITORING ASSEMBLY

☐ 1 ea. VU-III Stereo Monitoring Panel	\$240.00
☐ 1 ea. MM-I Self Powered Mikromonitor	\$179.95
☐ 1 ea. RM-I Rack Mount Kit	\$ 75.00
☐ 1 ea. XL18MF Interconnect Cable	\$ 19.00
☐ Total Regular Price	\$513.95

★ Limited Introductory
Package Price

\$440.00

+ tax and shipping if applicable

MIKROLAB
VIDEO INCORPORATED

4121 Redwood Ave., Suite 215. LOS ANGELES, CALIFORNIA 90066
(213) 306-0120

Circle (94) on Reply Card

SAVE TIME

For fast, accurate service, please remove the Peel-Off Label (which is used to address your magazine) and affix it to the Reader Service Card, the Address Change Card, or to any correspondence you send us regarding your subscription.

Statement of Ownership, Management and Circulation (Act of August 12, 1970; Section 3685, Title 39, United States Code).

- 1A. Title of publication: Broadcast Engineering
- 1B. 338-130
2. Date of filing: Sept. 25, 1987
3. Frequency of issue: Monthly except in the fall, when 2 issues are published.
- 3A. Number of issues published annually: 13
- 3B. Annual subscription price: _____
4. Complete mailing address of known office of publication (Street, city, county, state, zip code): 9221 Quivira Road, Overland Park, Johnson County, KS 66215.
5. Location of the headquarters or general business offices of the publisher (not printers): 9221 Quivira Road, Overland Park, Johnson County, KS 66215.
6. Names and complete addresses of publisher, editor, and managing editor. Publisher (Name and Address): Duane N. Hefner, 9221 Quivira Road, Overland Park, KS 66215. Editor (Name and Address): Jerry Whitaker, 9221 Quivira Rd., Overland Park, KS 66215. Managing Editor (Name and Address): Tom Cook, 9221 Quivira Road, Overland Park, KS 66215.
7. Owner (If owned by a corporation, its name and address must be stated and also immediately thereunder the names and addresses of stockholders owning or holding 1 percent or more of total amount of stock. If not owned by a corporation, the names and addresses of the individual owners must be given. If owned by a partnership or other unincorporated firm, its name and address, as well as that of each individual must be given. If the publication is published by a nonprofit organization, its name and address must be stated.) Intertec Publishing Corp., a Macmillan Inc., company, 9221 Quivira Road, Overland Park, KS 66215.
8. Known bondholders, mortgagees, and other security holders owning or holding 1 percent or more of total amount of bonds, mortgages or other securities (If there are none, so state): Macmillan Inc., 866 Third Ave., New York, NY 10022.

Frames are numbered in groups of eight with a control bit C_n . (See Figure 8.)

The compression process is implemented by finding the maximum sample value in a block. This value leads to one of five possible degrees of compression. A 3-bit scale factor word (R_2, R_1, R_0) is associated with each block carrying information for the expander in the receiver. Using 2's complement terminology for high-amplitude values, the bits (10 out of the 14) are taken from the most significant positions of the word. If the value is positive, it might be represented as 0, 1, x, x, x, x, x, x, x, x. Thus, 1, 0, x, x, x, x, x, x, x, x would indicate a negative value.

For stereo, one block of left samples and one block of right samples are mixed

EXPANDED CONTROL

Touch-Tone® Remote Control Systems



For versatile, cost-effective control and monitoring of unattended sites, using DTMF commands. Accessible from any Touch-Tone® telephone, microwave or two-way radio. Multiple options permit expandability for diverse control applications.

■ Remote Control Systems ■ Functional Building Blocks ■ Telephone Couplers

Part of the complete line of state-of-the-art remote control systems from Monroe Electronics.



MONROE ELECTRONICS, INC.

100 Housel Avenue, Lyndonville, NY 14098
Phone 716-765-2254 • Telex 75-6662 • Easylink 625-47-850

Circle (95) on Reply Card

	Average No. Copies Each Issue During Preceding 12 Months	Single Issue Nearest To Filing Date
A. Total No. Copies Printed (Net Press Run)	40,203	41,310
B. Paid Circulation		
1. Sales through dealers and carriers, street vendors and counter sales	-	-
2. Mail subscriptions	35,696	35,905
C. Total Paid Circulation	35,696	35,905
D. Free Distribution (including samples) by mail, carrier delivery or other means	2,230	2,179
E. Total Distribution (Sum of C and D)	37,926	38,084
F. Copies Not Distributed		
1. Office use, left-over, unaccounted spoiled after printing	2,277	3,226
2. Return from News Agents	-	-
G. Total (Sum of E and F should equal net press run shown in A)	40,203	41,310

I certify that the statements made by me above are correct. (Signature of editor, publisher, business manager, or owner.)

DUANE HEFNER
Publisher

into one frame in such a manner that the samples follow one another successively. Naming the left samples A and the right samples B, we may represent the subgroup of 16 samples as:

$$A_1, B_1, A_2, B_2, \dots, A_n, B_n, \dots, A_{15}, B_{15}, A_{16}, B_{16},$$

where A_n (or B_n) consists of a representative group, such as $a_{n0}, a_{n1}, a_{n2}, \dots, a_{n9}, P_n$, where n_0 is the least significant and n_9 is the most significant of the bits in the compressed data. P_n , at the end of the compressed form of the word, is a parity bit in principle, but, it is modified with the scale factor bits, following a specific pattern equal to (for sample number $1(+3n)$): the parity bit modified with scale factor R_2 , sample 2 with R_1 , and



You
can measure...

with the best monitor and the most accurate test set.

The FMM-2/FMS-2 series monitors provide an even greater degree of precision measurement than ever before... You can measure S/N below 90 dB, You can measure crosstalk below 85 dB, You can measure separations of better than 70 dB, You can measure frequency response to better than 0.25 dB, You can measure distortions to lower than 0.01%, and much more... Our uncluttered panels and autoranging voltmeters make these measurements a dream.



BELAR CALL ARNO MEYER (215) 687-5550
ELECTRONICS LABORATORY, INC.
LANCASTER AVENUE AT DORSET, DEVON, PENNSYLVANIA 19333

Call or write for more information on Belar AM, FM, Stereo, SCA and TV monitors.

Circle (96) on Reply Card

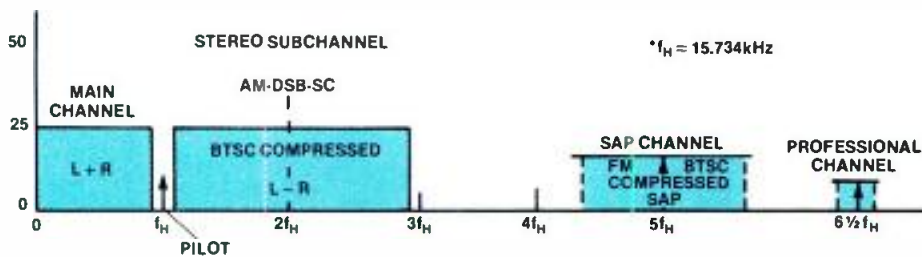


Figure 4. The energy spectrum of the BTSC audio signal.

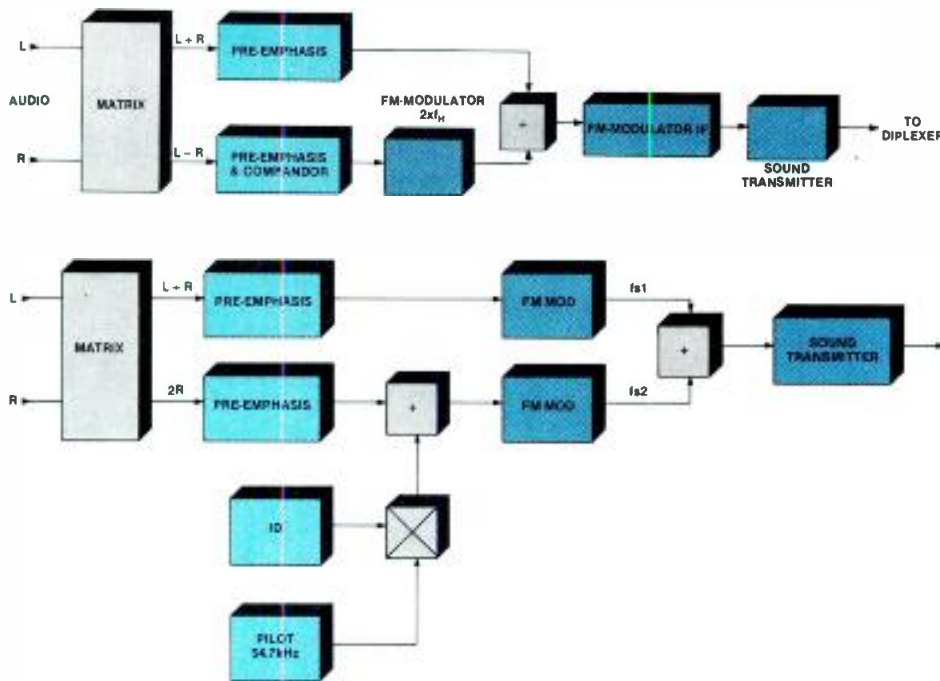


Figure 5. The FM-FM variation of the single-carrier system.

Figure 6. The analog dual-carrier sound system.

sample 3 with R_0 and so on, until sample 55 of the frame. Samples 55 to 64 carry only parity information in the P bit. The interleaving process is performed on every frame. A frame alignment word (FAW) is added plus a number of control bits and data channel information.


When all parts are assembled, the final frame can be represented by Figure 8. Transmission of the matrix begins with the first row, then the second row and so on. The method minimizes the effect of multiple-bit errors on the received signal.

Of the control bits, C_0 is 0 for the first eight frames and 1 for the next eight. The other C bits carry information about the audio mode—mono, stereo, dual

Continued on page 130

SMPTE/EBU Time Code Reader & Character Generator

Model DR-107B

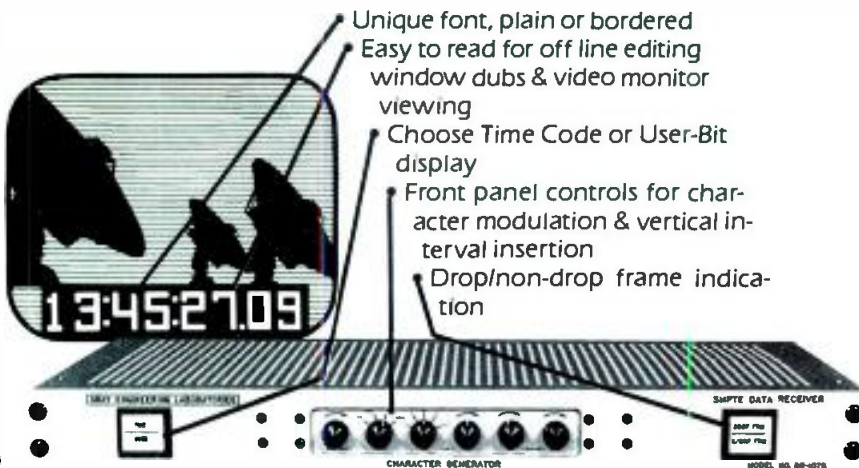

- Unique font, plain or bordered
- Easy to read for off line editing window dubs & video monitor viewing
- Choose Time Code or User-Bit display
- Front panel controls for character modulation & vertical interval insertion
- Drop/non-drop frame indication

Superior code reading using "The McFadin Window®"
Reads 1/100 to 100 times play speed (machine dependent)
Restored Time Code output for dubbing
Parallel BCD output
1 3/4" Rack mounting
5-Year warranty including parts and labor

GRAY ENGINEERING LABORATORIES
504-P West Chapman Avenue
Orange, CA 92668
714-997-4151

Circle (57) on Reply Card

FREE 32pg Catalog & 50 Audio/Video Applic.
PWR SUPP. CO.
PHONO, MIC, TRANS, ACM, TAPE, VIDEO, LINE, OSC
Stereo/Mono Pwr Ampl.
8-in/2-out, 12-in/4-out, 16-in/4-out
Video & Audio Dist. Ampl., TV Audio & Recd Prod Consoles
OPAMP LABS INC (213) 934-3566
1033 N Sycamore Av LOS ANGELES CA, 90038

Circle (58) on Reply Card

PRECISION MAGNETIC TEST TAPES
STL
Standard Tape Laboratory, Inc.
26120 Eden Landing Road #5, Hayward, CA 94545
(415) 786-3546

Circle (59) on Reply Card

NEW! AEC-1 10 x 1 Routing Switcher \$995!
Broadcast Quality ■ 30 MHz Video BW
1-800-782-2321
Adrienne Electronics Corporation
11994 MARJON DRIVE, NEVADA CITY, CA 95959

Circle (60) on Reply Card

Want more information on advertised products?
Use the Reader Service Card.

NEW. HERE. NOW.



NEW A14x9ERM

NEW A18x8.5ERM

Offering you higher performance, reliability and value, Fujinon's newest and finest ENG lenses are available now.

The new A18x8.5ERM gets you in closer and takes you out farther. It gives you two focal ranges — 8.5mm to 153mm and 17mm to 306mm — by flipping the built-in 2X extender lever. The F1.7 maximum aperture is flat to 116mm and only drops to F2.3 at the full 153mm tele position. About half an inch longer than ordinary ENG lenses, the new A18x8.5ERM's combination of range, features, and performance are making it the new world standard for electronic news gathering.

The new A14x9ERM, lighter and more compact, outperforms its predecessors and the competition. It's less than 1.4kg with the flexibility of a built-in 2X extender. MOD is 0.8m. And it provides an F1.7 maximum aper-

ture from 9mm to 103mm (F2.0 at 126mm).

Both new lenses offer performance improvements including higher MTF with significant reductions in distortion and longitudinal chromatic aberration. Images are sharper and brighter throughout the zoom ranges. Color and focus tracking are right on. Both lenses also offer macro focusing, weatherized construction, and such Fujinon options as miniaturized, built-in pattern projectors, front-mounted wide and tele adapters, manual and servo hand controls for studio use, and push-button shot boxes for programming multiple focal positions and zoom speed.

They're new. They're here. And they're available now. To learn more about Fujinon's new ENG lenses, you'll get more information or a demonstration by calling the Fujinon location nearest you.

Circle (99) on Reply Card

FUJINON INC. 10 High Point Drive, Wayne, N.J. 07470
SOUTH 2101 Midway, Suite 350, Carrollton, Texas 75006
MIDWEST 3 N. 125 Springvale, West Chicago, Ill. 60185
WEST 118 Savarona Way, Carson, Calif. 90746

(201) 633-5600 Telex 6818115
 (214) 385-8902
 (312) 231-7888
 (213) 532-2861 Telex 194978



FUJINON

There and Back With My Ikegami HL-79

By Ken Jobson, WTN Camerman

As a hardened cameraman of many years, I consider myself fortunate that UPITN/WTN has provided for my professional use, an Ikegami HL-79 video camera which produces quality images often under the most adverse conditions, is electronically reliable, robustly constructed and designed in such a way that it relates to the operator's body. The camera after all, is only a device which facilitates the recording of images seen by the human eye and therefore becomes an (electronic) extension of the human body.

I have very strong emotional feelings about all of 'my' electronic cameras — all Ikegami's.

Using Ikegami cameras has given me tremendous professional satisfaction and, I hope, established my reputation as a cameraman who will go to extreme lengths in order to capture 'the shot'. My Iky's have been taken from me at gunpoint, survived several car crashes, travelled in helicopters, tanks, armored cars, innumerable jeeps, fire engines, on camels, rowing boats to battleships, have been stolen, have boiled in midday sun in the Sudanese desert and chilled on the ski slopes of Lebanon, have witnessed the most appalling degrees of human inspired destruction, a fighter falling to the ground one meter in front of the camera as he was hit in the stomach by a sniper's bullet, glamorous fashion models on the catwalk, the Prince who loves playing polo, a famous parrot now alas no longer with us renowned for his voluntary impressions of incoming shelling, hundreds of correspondent standuppers, the happiness at weddings and the sorrow of bereaved relatives, the innocent child at play and another innocent child staring into infinity from his hospital bed wondering why that phosphorous bomb exploded in his house. My Iky's have never let me down on any of these shoots. But one incident, which demonstrates the remarkable characteristics of Ikegami cameras, will remain firmly in my mind forever.

Location: Main street in Bhamdoun (pronounced without the 'B') an attractive mountain town in central Lebanon on a sunny afternoon. We had just finished taping the totally deserted street (or so we thought) and locked up shop fronts, when the distinct crackle of automatic gunfire could be heard breaking the eerie silence. It took perhaps five to ten seconds for us to realize those bullets were coming at us. As my soundman and I both took independent evasive action, the Ikegami HL-79 and video recorder

both fell from our shoulders onto the pavement. The Iky laying on its side (and as I realized minutes later, my finger had touched the roll button as it fell out of my hand) was now happily recording the sound of incoming bullets hitting the surrounding shop fronts. Our cries in Arabic that we were press and the gunmans order in English "Get out, get out," were followed by another burst of gunfire. Carefully, I crawled across the pavement and uprighted the still rolling Iky, pointing it in the direction of its crew who were to be seen crouching behind a sand heap for shelter. Minutes later, thinking our ordeal was over, I bent down to press the stop button, when an M-16 bullet tore through my right neck muscle. It was only the sudden feeling of wetness down my back that made me aware that something was seriously wrong. I was hit. Once again I flung myself down behind the gravel pile, as the gunman fired at least another twenty bullets at us. The firing then ceased, and I was put into the back of a car and taken to an Israeli medical unit, who treated the wound, gave me a pain killer injection and hot coffee. Later at the American University Hospital in Beirut, doctors gave me a local anesthetic, cleaned the wound internally (very painful), x-rayed, took blood pressure, etc.



The bullet which miraculously missed my spinal cord by two millimeters has left two holes three inches apart in the back of my neck. Subsequent viewing of the video reveals twenty five recorded gun shots at us before I was hit. Plus approximately twenty shots as I lay bleeding. I was very happy not to be going home as a waybill number. And today while the memories linger, my work as it must, goes on.



**Ikegami
Celebrates 10,000
HL-79's Sold
Worldwide With
Their Latest
Direct Dockable
Versions
—and welcomes
your memorable
HL-79 stories.**

Since its introduction, the HL-79 series cameras have been sold to over 10,000 users worldwide making it the most popular camera of all time. The latest HL-79 (shown above) is the direct dockable version of the HL-79. Totally flexible, the camera can be used as a stand-alone, one piece with on-board VCR (Beta or MII), or a remote using multicore or triax. It is versatility at its best. Features include selectable gain, SMPTE color bar generator, high S/N ratio, and much more.

For more information call your regional Ikegami office for the dealer near you.

If you have a fascinating HL-79 story to tell, please send it to our Maywood, N.J. office. We may use it in an upcoming ad.

Ikegami

Ikegami Electronics (USA), Inc. 37 Brook Avenue, Maywood, NJ 07607
East Coast: (201) 368-9171 West Coast: (213) 534-0050 Southeast: (813)
884-2046 Southwest: (214) 869-2363 Midwest: (312) 834-9774 Hawaii:
(808) 946-5955

Circle (100) on Reply Card

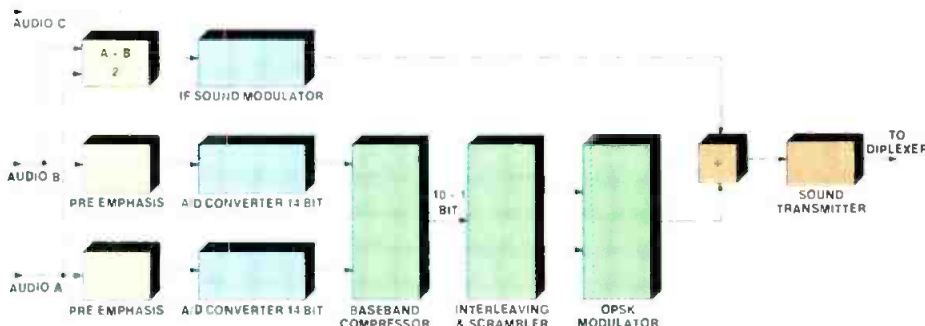


Figure 7. The sound transmitter side of a digital dual-carrier system.

Studer Revox PR99 MKII

The Audio Production Machine



If you're serious about audio production, you'll want to work on a truly professional open reel recorder. And if you want reliability, precision and sonic excellence in one machine, you'll use a tape deck from the world's most respected name in audio recording: Studer Revox.

The Revox PR99 MKII packs a full load of production features into a compact recorder. Features like an LED real-time counter for exact elapsed tape time in hours, minutes and seconds. An Address Locate button to automatically search-and-cue to any pre-selected address point. A true Zero Locate feature to return the tape to the zero counter location—EXACTLY! Also auto Repeat to continuously replay a tape segment of any length, and built-in variable speed control to raise or lower pitch up to 7 semitones.

Other PR99 MKII features include: • Die-cast chassis and head block for absolute alignment stability • Self-sync • Input mode switching • Front panel microphone inputs • Balanced "X" inputs and outputs • Swiss/German craftsmanship and precision. Options include monitor panel, remote control, steel roll-around console, and portable carry case.

As for sound quality, we think you'll find the Revox PR99 MKII sonically superior to anything else in its price range. But that's for your ears to decide. Audition the Revox PR99 today at your Revox Professional Products Dealer.

STUDER REVOX

Studer Revox America, Inc., 1425 Elm Hill Pike, Nashville, TN 37210. (615) 254-5651

Continued from page 126

language, data or the digital-system second channel carries an audio signal different from carrier 1.

The interleaved frame is finally scrambled by a specific bit sequence that is easily removed during reception. Nonetheless, a dispersed energy pattern is ensured for all levels. With this principle, the carrier of sound carrier 2 is always modulated, and cross modulation patterns in video are less visible. The QPSK modulator places the bit sequence on the carrier, taking two bits at a time. (See Figure 9.)

The principle in the modulation is differential phase-shift encoding. Information is carried by the value of a shift in carrier phase relative to the last stable condition. For example, 00 indicates no phase shift, while 01 is 90° shift. The rise time of phase transients is determined by low-pass filters in the QPSK modulator to set the necessary bandwidth limitation.

System performance

Evaluating the stereo performance must include the reception portion of the system. A typical standard receiver is illustrated in Figure 10. An intercarrier design is used to suppress phase noise from its own front-end. A quasi-split carrier system is used to obtain maximum quality despite video modulation. The notch between vision and sound carriers suppresses video frequencies at subharmonics to the intercarrier.

All of the stereo implementations described here must pass such a receiver system. Consequently, the behavior of the vision part of the transmitter plays an important role. Because intercarrier frequency f_i is $[f_{\text{vision}} - f_{\text{sound}}]$, the sound quality will depend accordingly upon phase stability of the vision modulator and the vision transmitter. A real split-carrier receiver is realizable, but would be too costly for a commercial TV receiver.

Tests and measurements

The existence of a number of different stereo aural TV systems places special demands upon test equipment to determine the performance of the systems. For the engineers who must make the performance measurements, the ideal



The Only Antenna Positioner That Does The Whole Job.

The trouble with most satellite antenna positioners is that they only do half the job.

But our new MAPS 4 not only provides you with over 260 satellites and polarity presets for virtually unlimited programming access, it finishes the job that other systems only start.

Exclusive automatic peaking

The MAPS 4 not only drives the antenna to the correct position, our exclusive auto-peaking fine-tunes the alignment, so you are assured of optimum reception every time you reposition. Accuracy like this is only possible with the Microdyne MAPS 4. Once you've seen it work, you'll wonder how you ever got along without it.

There are other great features too, such as our non-volatile memory that protects you from power outages and interrupts, our remote control capability, and the alarm that lets you know about a problem with an audible tone as well as a warning light.

Rock-solid performance and stability

Of course the MAPS 4 system includes the Microdyne/AFC reflectors known worldwide for their superior design and performance characteristics. Their rugged construction ensures the stability you need when the weather turns rough—times when lesser equipment shows its weakness.

The mounts are also fast. The MAPS 4 system scans the entire satellite arc in less than two minutes, putting any satellite

within your reach. The system is compatible with either C- or Ku-band satellites, and is available with either a polar or elevation-over-azimuth mount.

Competitive price

The Microdyne MAPS 4 is the most advanced satellite antenna positioning system available, yet it is very affordable. Especially when you consider that you're getting the time-tested Microdyne name for quality and reliability. So, don't settle for a positioning system that does only half the job. Call us today at (904) 687-4633 and get one that does the whole job.



Microdyne Corporation

491 Oak Road • P.O. Box 7213
Ocala, FL 32672 • TWX: 810-858-0307

FAW	5 CONTROL BIT $C_0 - C_4$	11 ADDITIONAL DATABITS	704 BITS OF INTERLEAVED SOUND DATA, 16 BIT
1, 2, 3, 4, 5, 6, 7, 8	9, 10, 11, 12, 13	14, 15, 16, 17, 18, 19, 20, 21, 23, 24	25, 69, 113 685
			26, 70, 114 686
			27, 71, 115 687
			28, 72, 116 688
		44 BITS (4 x 11 BIT COMPANDED SAMPLES)	- - - -
			- - - -
			- - - -
			68, 112, 156 -

Figure 8. The digital frame structure of the BBC/Nordic system.

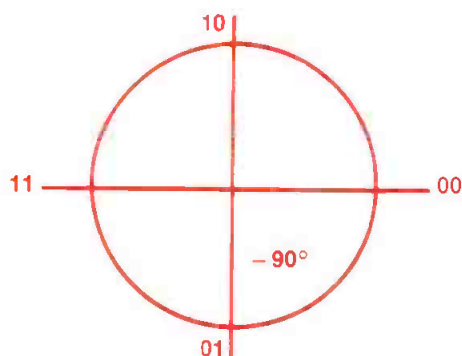


Figure 9. QPSK modulation phase-shift diagram.


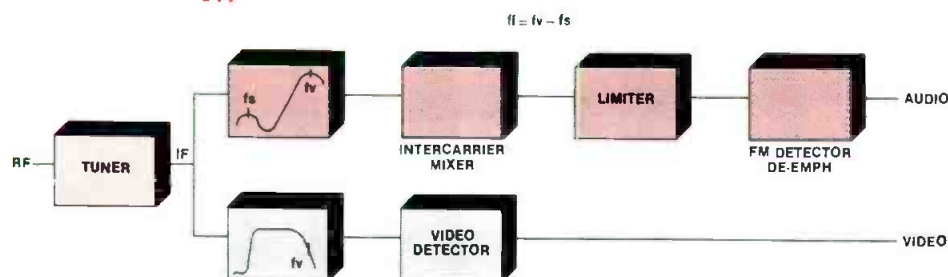


Figure 10. The general plan of a quasi-split-carrier receiver.

test setup will involve as few pieces of equipment as possible. For the manufacturer of the test equipment, a flexible, multistandard, modular approach is desirable. The following description outlines a number of factors for consideration in the design of a stereo system test unit.

At the heart of the test system is a TV-IF modulator that can be adjusted to meet the various CCIR standards basic frequencies and parameters (See Figure 11.) In principle, all single-carrier systems can be supported by providing an audio input capable of 150kHz bandwidth. This modulator includes all signal processing, such as modulation and bandpass profiling, for stereo systems de-

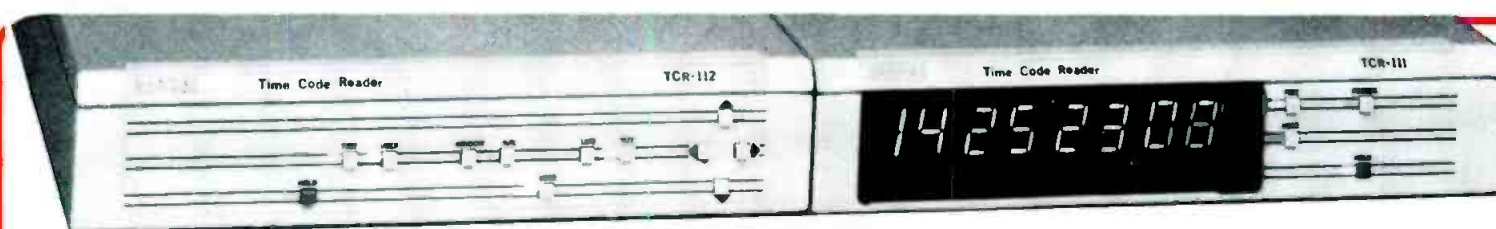

Two new Time Code Readers from skotel

AVAILABLE
...NOW.

All new... from front panels to advanced reader and error checking electronic circuits. Enhanced full reader features and performance... read from 1/40 up to 80X play speed... small, smart packaging designed for desk or rack mount (1/2 rack width).

For all those who told us... "All I want is an LTC reader with a video display for window dubs."

It's the TCR-112 at \$1350. (F.O.B. Destination)

- Simultaneous display of Time and User bits.
- 4 character heights... highly legible font.
- Positionable over full raster.

For those who say... "I only need an LED display."

It's the TCR-111 at \$1100. (F.O.B. Destination)


- Large green LEDs for visual comfort.
 - Reshaped code output (also TCR-112).
 - Dual standard SMPTE/EBU (also TCR-112).
- Call or write for name of your nearest dealer and our latest Product Guide.

Skotel... for 10 years a pioneer of VITC, color field ID, User bit and video display applications.

Skotel Corporation, 1445 Boul. Provencher
Brossard, Que., Canada J4W1Z3
(514) 465-8990 In U.S. 1-800-361-4999

Circle (104) on Reply Card

ECONOMY ROUTING SWITCHERS SERIES AFV-10B-X

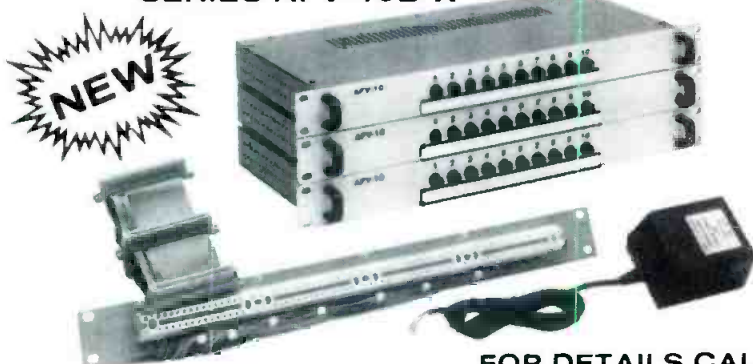

- Available From 10X2 - 10X5
- Stereo Audio Follow Video
- Balanced Inputs & Outputs
- Broadcast Specifications
- Unique Design
- Simple Construction
- Two Year Warranty
- Affordable. Priced From 795.00

H.M. DYER Electronics, Inc.

48647 Twelve Mile Road Novi, Michigan 48050
(313) 349-7910

FOR DETAILS CALL

Circle (105) on Reply Card

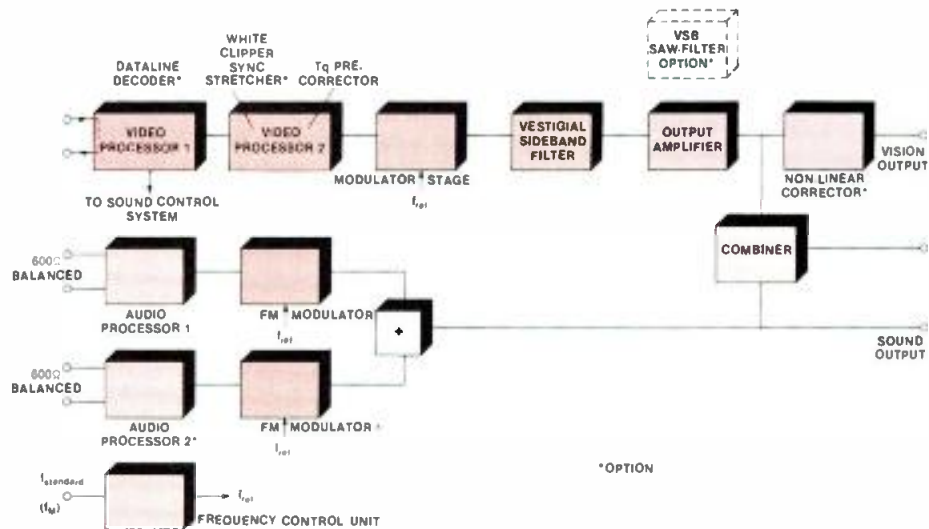


Figure 11. A block diagram of the stereo audio TV-IF modulator.

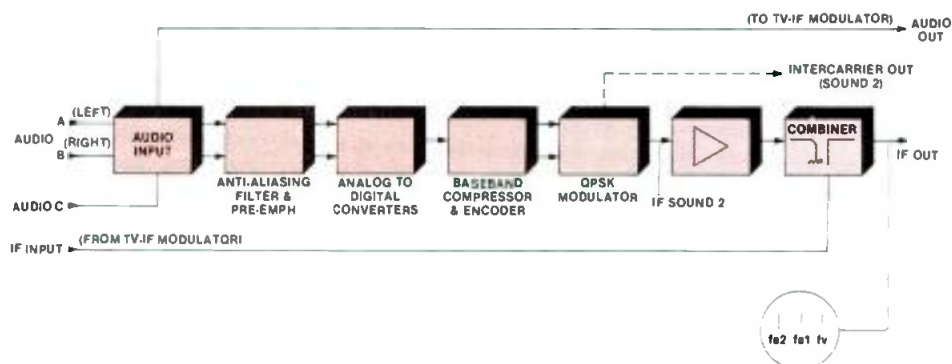


Figure 12. A block diagram of the digital sound modulator.

NEMAL
your stocking distributor for:

KINGS
BROADCAST PRODUCTS

CALL FOR SHIPMENT TODAY
*RF CONNECTORS & ADAPTERS
*TRIAx CONNECTORS
*PATCH PLUGS/CORDS
*CRIMPING TOOLS
*JACK FIELDS

CALL US AT 1-800-327-5999 (US) OR 1-800-522-2253 (FL) OR 305-893-3924 (INTL) FOR YOUR COPY OF OUR 36 PAGE CABLE AND CONNECTOR SELECTION GUIDE AND THE KINGS BROADCAST CATALOG.

NEMAL ELECTRONICS INC.
12240 N.E. 14TH AVE. N. MIAMI, FL 33161
FAX (305) 895-8178 TELEX 6975377
TELEPHONE (305) 893-3924

Franchised distributor for Kings, Amphenol, Alpha, Belden, & Cablewave
-Offices in New York and Florida-

Circle (106) on Reply Card

See us at AES, Booth 316

WHATCHA-MA COLLET.

What the heck's a COLLET?
Just the best designed, most dependable and stylish general purpose knob in the world. That's what.

If you want a knob that will never break, melt, corrode, or shake loose; a knob with exquisite tactile feel; a balanced, sculptural, classic knob, then you want Selco's COLLET knobs.

Let us impress you. Our COLLET'S matte-finish, precision-molded 94V-2 nylon body is permanently bonded to a solid brass collar. This retains a machined, split-base threaded bushing, also solid brass, that slips over your control shaft and tightens from the front with a special brass nut. Finally, a nylon cap in one of seven decorator colors snaps on the front.

Simply superior. Not even a set screw mars its elegant exterior. And Selco's COLLETS come in a full range of sizes and types, with all the accessories, too.

If you're a discriminating designer who wants the respect of his most demanding customers, then furnish your equipment with Selco's COLLETS. The only thing modest about them is the price. As low as 39 cents each in OEM quantities.

Send for our full-color catalog and a sample knob today. You'll collet fantastic!

selco
PRODUCTS CO.

7580 Stage Rd. • Buena Park, CA 90621 • Phone (213) 921-0681, (800) 25-SELCO • Telex 655457.

Circle (107) on Reply Card

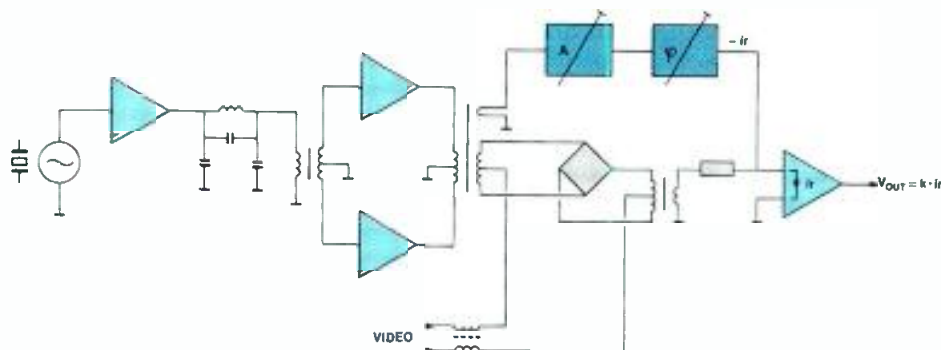


Figure 13. The plan of a vision modulator stage for low ICPM, residual carrier and spurious response.

TAKE IT ON THE ROAD. SEE WHAT IT WILL DO.



Shok-Stop™ cases are tough. Hit the road with them once, and you'll know exactly what we're talking about.

Built like no other, Shok-Stop cases can take a beating that would turn other cases into so much scrap metal and sawdust. The Shok-Stop's rugged high density polyethylene shell, with its unique ribbed design, absorbs virtually all impact shock. The little remaining vibration reaching the interior is instantly overcome by the high density custom fitted foam. And, your very valuable extremely sensitive broadcast equipment is left totally unharmed.

Shok-Stop cases are water tight, scuff resistant and are the only field repairable cases on the market today. They can be ordered with optional EMI/RFI shielding and pressure release valves.

So, the next time you hit the road for one of those knock-down drag-out sessions, remember to pack it all in the toughest transit cases made.

The Shok-Stop from Thermodyne.



**THERMODYNE
INTERNATIONAL LTD**

20850 Alameda St., Long Beach, CA 90810 (213) 603-1976

Circle (108) on Reply Card

signal from an external digital sound modulator that includes the complex digital-encoding circuitry, such as all analog-to-digital conversion, companding, interleaving and scrambling.

Another approach to the test system would be to include the QPSK module in the digital sound-modulator package, all as a separate package from the TV IF modulator. (See Figure 12.) If this design is followed, the combining of the carrier 2 with Vision+Sound 1 or just Sound 1 is handled on an IF basis through a transformer coupler in the digital unit. Certain flexibilities of operation are provided by the separated-units approach, including stand-alone use. When required for specific tests, a synthesizer circuit in the digital sound modulator provides an intercarrier frequency output.

In the visual portion of the TV IF modulator, special consideration should be given to incidental carrier phase modulation (ICPM), as this factor is a primary area of concern in stereo operation. Ideally, the modulator unit will produce no measurable ICPM values. Balanced amplifiers in all filter networks can alleviate much of the distortion despite complex load impedances. (See Figure 13.)

Mixing stages often are characterized by excessive residual carrier. By using a balance to the mixer with amplitude and phase compensation summed into the mixer output, remnants of the residual carrier can be kept low. Low-pass filtering in the driving circuit suppresses any high-order harmonics from the frequency source.

Ideal filters for shaping and bandpass profiling are unrealistic, even today. Through computer-aided design, however, it is possible to develop filter networks with optimum amplitude and group delay characteristics in terms of pulse response. This approach should be used in functions such as the vestigial sideband filter. The design found from computer optimization will include LC techniques as well as surface acoustic wave (SAW) filters, combined with balanced mixer methods to produce the least possible low ripple and tilting in frequency ampli-

tude and group delay.

Finally, the multichannel conversion portion of the test unit must be able to develop any possible output frequency within common TV transmission bands. In order to do this without the introduction of significant spurious signals, particularly within VHF, UHF and typical CATV spectra, a multiple (triple) conversion is practical and recommended.

Metering growing demands

Transmissions of television with multiple audio channels have received favorable viewer responses with all four current system types. One reason for this is that the psychoacoustical phenomenon of the spatially enlarged audio field

places the viewer more within the action. Another reason is that equipment required for stereo operation is all quite new and has not been excessively readjusted or ignored. A third reason is that stations beginning stereo operation logically will have performed an audio proof of performance on the transmission system. Fourth, by and large, the stereo audio sound with the program typically will have been produced on new generation equipment.

If stereo and multiple channel is to remain a favored transmission mode, engineers must be aware of how these systems work, and they must be given the tools to maintain the system at a peak performance level.

Bibliography

- EIA Television Bulletin No. 5 "Multichannel TV Sound BTSC-recommended Practice," July 1985.
- British Broadcast Corporation. "Specification of a Standard for UK Stereo with Television Transmission." BBC Engineering, 1986.
- Ely, S. R. "Progress and International Aspects of Digital Sound." IBC Convention, 1986.
- Scheeberger, G. "Strungen des Differenz trger-Tonephags durch Phasenmodulation des Bildtrgr." Rundfunk Technische Mitteilungen, 1986.
- Wittrock, C. "Stereo Performance." IRE Convention, June 1987.
- Ibid. "Hi-Fi Sound Aspects." IBC Convention, 1984.
- Diensel, S. "Stereophonic Sound and Two Languages in Television." IBC Convention, 1980.

Editor's note: The test modulator system described in this article is based upon design criteria used by Philips Elektronik Industri A/S, Copenhagen, in developing the PM 5680 TV-IF modulator, the PM 5690 multichannel converter and the PM 5687 digital sound coder.

1:~))))))

MODULAR AUTOMATION

We use the same components and methodology to build a wide variety of automation systems:

*Video Tape Sequencing
Net Delay
Spot Insertion
Full Automation
Remote Control
Video Segment Retrieval
Multi-Media Control*

----- Why Modular? -----

*Low Cost
High Reliability
Easy Expansion and Change*

Excellence in Video Control Systems Since 1975

THE ENGINEERING LAB

(619) 758-7743

Circle (109) on Reply Card



DS-600 DIGITAL STORE

**DIGITIZE, STORE AND RETRIEVE
COMPLETE CONTROL PANEL
SETTINGS OF COLOR
CORRECTORS, SWITCHERS,
TBC's, ETC.**

- 1000 page memory
- 32 functions per page
- Any existing stored set up can be instantly copied to other pages in memory
 - 12 bit digitizing
- Recall resolution of .025%
 - 20V DC input range
 - Full battery backup
 - Local or GPI control

broadcast video systems ltd.

40 West Wilmot Street, Richmond Hill, Ontario L4B 1H8
Telephone: (416) 764-1584 Telex: 06-964652 Fax: (416) 764-7438

Circle (110) on Reply Card

JVC CR-850U videocassette recorder

By Jay Ankeney

The JVC CR-850U frontloading ¾-inch videocassette editing recorder represents the company's commitment to the future of the ¾-inch videotape medium. The VCR offers several technical innovations that should make it a serious competitor for this segment of the market.

Construction

The deck is built on a diecast chassis and can be rack-mounted. The machine is quiet, partly because the deck's operation is controlled by direct-drive mechanisms, which eliminate much of the mechanical noise. The machine's direct-drive system eliminates all belts and tension arms that control the transport system. Once the U-matic arm has wrapped the tape around the upper tape drum, the direct-drive transport keeps the capstan constantly engaged while in play, search, jog and still modes. Electronic, rather than mechanical, stress sensors maintain constant tape tension. Even the skew adjustment is electronic, instead of manual.

Primary motion and tape controls are located in the center of the front panel. Large, illuminated buttons are used to direct the machine's operation. A large, bidirectional, variable-speed search control dial is located to the right of the motion controls. The editing controls are located to the left of the motion control knobs.

A dual-purpose meter, located in the upper left corner displays both tracking and video levels. During playback it displays the RF-tracking level, and in the record mode it measures the incoming video level. The front panel also contains two audio VU meters. Concentric level-control knobs allow the operator to adjust both record and playback levels.

The VCR provides two composite video inputs and one Y-688 input. A similar complement of outputs is provided on the back panel.

Selectable features

Switches mounted along the lower front panel provide access to other user



Performance at a glance

- Luminance response: 260 TVL color mode
- S/N ratio: 49dB I./47dB C
- Video headswitch in: vertical interval
- Search speeds: 20× rev/15× fwd
- Audio response: 50Hz-15kHz
- Audio: -20/+4dBs, 10kΩ
- Audio S/N: 48dB

features. One switch provides a choice of line or dub inputs, another switch allows the machine to be used as a miniswitcher between the A and B video inputs.

For ease in maintenance, several test points are accessible without having to remove the VCR from the rack. These test points include: drum pulse, RF and video levels and both audio channels.

A unique feature is the deck's 7-position Y-frequency response control, which permits the incremental boost or attenuation of luminance detail in the 3MHz range.

The remainder of the lower panel houses switches that control several optional features: video AGC, color or monochrome input processing, audio limiters, frame servo control, sync source and memory control.

LED display

Centered on the front panel is an 8-digit LED display that shows hours, minutes, seconds and frames. The data is normally obtained from the CTL pulse. An independent timer also is available so edit points can be determined by duration.

When coupled with optional SA-K11 time-code reader/generator and character inserter, the address track is displayed on the front-panel display. The optional reader/generator also allows the No. 2 video output to provide convenient burned-in window time code. In addition, when blacking tapes, the desired time-code starting numbers can be loaded from the front panel. Or, the time-code generator can be used to assemble edits in the *jam sync* mode. The SA-K11

time-code reader/generator can even work with user bits, which makes the reader/generator the one major option I recommend for use with the deck.

The right side of the LED panel contains a diagnostic warning panel. Microprocessors inside the VCR continually monitor the various circuits. If any problems are detected, warning lights are illuminated on the front panel. Monitored circuits include: servo lock, horizontal phase, lack of control track and presence of address-track time code. When an internal circuit error is detected, a 2-digit diagnostic code is displayed on the diagnostic panel. The service manual lists the error codes and probable causes. Such information makes resolving a problem much easier.

Signal processing

The VCR provides several video noise-reduction circuits, both for luminance and chrominance signals. The luminance signal benefits from a correlating noise-cancelling circuit, which delays the video signal by one line and compares it to the original. This helps eliminate random noise. The luminance signal also passes through a dropout compensation circuit. This circuit detects the transient signal dips in the FM-circuitry area and corrects them after demodulation in the video section. This means there is virtually no delay in the DOC process.

Signal linearity is crucial to proper video processing. To address this need, the VCR uses low-distortion FM amplifiers. In addition, each video head is provided with an independent amplifier and equalization signal, which is custom matched for that channel.

A direct automatic-phase control circuit (APC) compensates for unavoidable mechanically induced phase errors. See Figure 1. The circuit uses a horizontal discriminator that compares the jitter on the horizontal sync and shakes or tracks the 4.27MHz oscillator to eliminate velocity errors and stabilize the chroma signal.

Head switching occurs in the vertical interval at 2H before vertical sync. Through line replacement, the resulting noise is removed from the picture. Other

Ankeney is a videotape editor at KTTV-TV, Los Angeles.

Only Canon Gives You

this...



and this...

and this!

J8 x 6 BIE: 6mm Wide, 96mm Telephoto, 11" M.O.D.!

Once again, superior Canon optical technology gives you greater flexibility and capability than ever before. The incredible Canon J8 x 6 BIE lens provides the wide-angle coverage you need in tight situations and its built-in 2X extender gives you 96mm—when you need to get closer.

Better still, even with the 2X extender, you can get as close as you want, since your M.O.D. is an amazing eleven inches, even at 96mm! The Canon J8 x 6 BIE, it gives you more.



Specifications:

Focal length: 6-48mm, (12-96 w/extender)

Max. Relative Aperture: f1.7 (6-33mm), f1.9 at 48mm
f3.4 (12-66mm), f3.8 at 96mm

Angular Field of View: 72.5° at 6mm, 10.5° at 48mm
36° at 12mm, 5.2° at 96mm

Minimum Object Distance: 11"

Canon

Optics Division
Canon USA, Inc., Head Office: One Jericho Plaza, Jericho, NY 11753 (516) 933-6300
Dallas Office: 3200 Regent Blvd., Irving, TX 75063 (214) 830-9600
Chicago Office: 100 Park Blvd., Itasca, IL 60143 (312) 250-6200
West Coast Office: 123 Paulmarino Avenue East, Costa Mesa, CA 92626 (714) 979-6000
Canon Canada, Inc., 6390 Dixie Road, Mississauga, Ontario L5T1P7, Canada (416) 678-2730
© 1986 Canon U.S.A., Inc.



Enjoy easy extended payments
with the Canon Credit Card. Ask for details
at participating Canon dealers and retailers.
Available only in US.

Circle (111) on Reply Card

www.americanradiohistory.com

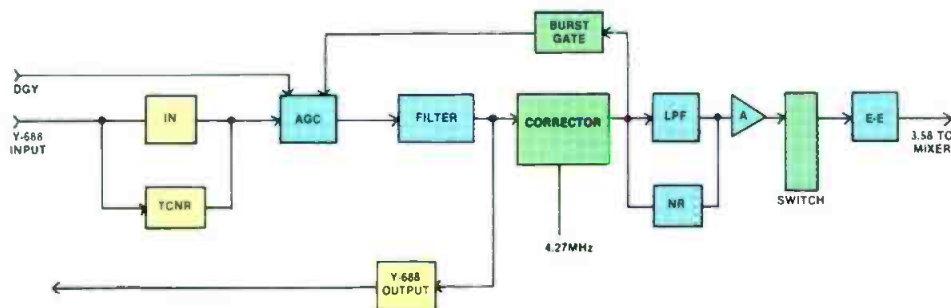


Figure 1. The automatic phase-control circuit maintains the correct phase during both playback and record by tracking the 4.27MHz oscillator with the horizontal sync jitter.

chroma noise, which may be added by the address-track time code is removed by additional noise-canceling circuitry.

To eliminate luminance/chrominance delay, individual record, playback and E-to-E adjustments permit the color to be precisely aligned with the Y signal. In the dub mode, (with Y-688 signals) a 75Ω input impedance is used for improved signal-to-noise ratio. This impedance can be changed if desired through an internal dip switch.

The video output is not bandlimited. The composite video signal contains as much high-frequency information as the unlimited RF output. This aspect may allow some newer TBCs to provide better performance without having the ex-

tra cost of adding a Y-688 input.

Versatile interfacing

One of the machine's more important features is the ease with which it can be interfaced with numerous editing systems. At this year's NAB, the CR-850U was successfully interfaced to 11 different editing systems.

Much of the flexibility is due to sophisticated control software. The software can be customized by setting dip switches within the machine. This feature allows the VCR to be programmed to meet the requirements of outboard systems.

Edit-timing dip switches allow the machine to set offsets of +2 to -1 frames for the requirements of different

edit controllers. Another dip switch permits setting preroll times to 3, 5, 7 or 10 seconds. The VCR also can be programmed to abort an edit when the control track is not present on the tape during video inserts.

The timer can be programmed to count up or down to meet the need of auxiliary equipment. In the ON position, timer one always counts in positive numbers, as required by many equipment manufacturers. When the switch is set to the OFF position, negative numbering is used, as required for some JVC equipment.

The video record/play and Y/C processor boards provide several user-settable dip switches. One switch permits

AT LAST! STEREO FIELD MIXING COMES OF AGE!

**Professional Net
Only \$1295**

Until you try the new AT4462, you'll never fully realize what other mixers put you through, just to get a stereo signal on tape, on film, or on the air. Because simply adding pan pots or another output to a mono mixer is not enough for today's stereo.

Field Tested and Refined

We went to network and independent broadcast engineers, and leading film and A/V audio people to learn your problems and needs first-hand. And we returned again and again to test our solutions. These tough critics agree that the new AT4462 sets up far faster, provides better signal control, and results in better audio...even in the hands of inexperienced personnel.


**NEW AT4462
STEREO FIELD MIXER
WITH EXCLUSIVE
MODU-COMM™**

Introducing Modu-Comm™

The AT4462 is designed for the real world. For instance, let's assume you're doing a simple sports remote. You set up microphones for the sportscaster and the color announcer, plus a stereo mike for the ambient crowd noise. Normally you would also have to run a

**For name of
nearest A-T Sound Specialist
CALL 1-800-992-ATUS (2887)**

In the rack-mount configuration, the CR-850U is easy to locate in almost any setting.

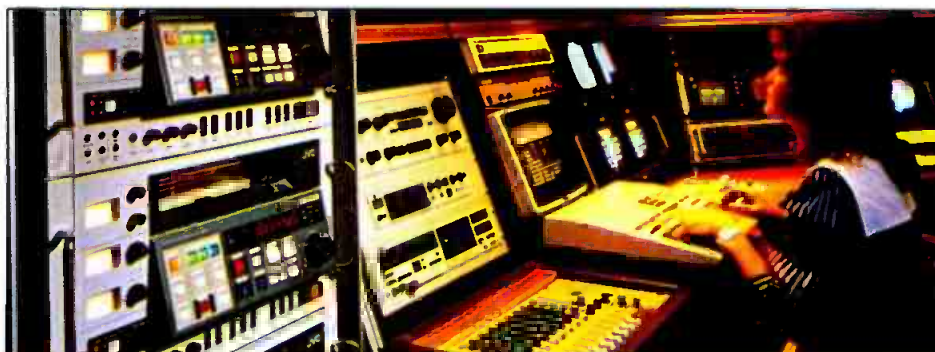

changing the nominal 75Ω input impedance to match the requirements of some TBCs. Other switches allow selecting several noise-canceling circuits.

The interface board contains a switch that allows the VCR to send out its own internal ID command through the RS-422 port to determine the ballistics default on individual edit controllers.

The software contained within the machine can be easily updated to accommodate new equipment. This feature, in conjunction with the user-settable control switches, allows the machine to work with a wide variety of equipment. Because the software is contained within a ROM, which can be changed by the user, the machine can be reprogrammed

to meet the demands of tomorrow's equipment.

Comments

I found the machine performed well when interfaced to both the CMX and Videomedia editing systems. It was responsive and capable of locking up within the first few seconds of preroll. When coupled with the optional SA-K11 time-code reader/generator and character inserter, the machine's second video output provides the editor with easily readable tape locations.

My checks indicate that the video path lives up to the deck's specifications, with clean vertical interval switching and a 47dB color S/N.

I have used the JVC CR-850U for many hours and find it to be a welcome addition to my work. It is quiet and provides excellent tape-handling and signal processing. The machine is certainly worth considering for those instances where top-quality ¾-inch production is needed.

Editor's note: The field report is an exclusive BE feature for broadcasters. Each report is prepared by the staff of a broadcast station, production facility or consulting firm.

In essence, these reports are prepared by the industry and for the industry. Manufacturer's support is limited to providing loan equipment and to aiding the author if support is requested in some area.

It is the responsibility of **Broadcast Engineering** to publish the results of any piece tested, whether positive or negative. No report should be considered an endorsement or disapproval by **Broadcast Engineering** magazine.

! : (-)))))

wired or wireless feed to the sportscaster for his cue phone.

But with the AT4462 and Modu-Comm, cue is fed through the announcer's mike cable already in place. Add a small accessory decoder to the end and plug both the cue phone and the microphone into the same cable. Cue can be program, an outside line, or "talk over" from the mixer. No extra wires, no crosstalk, and no change in audio quality! Nothing could be simpler or more efficient.

Now, No-Fuss Stereo

Actual stereo mixing is equally straightforward. The sportscaster and the color announcer in our example appear on separate pannable inputs so they can be centered as desired in the sound field. The stereo crowd pickup goes to a stereo input, with clutch-ganged controls for one-hand level control. And there's a second stereo input for another mike or line level source

(a second field mike perhaps, or for pre-show interviews on tape).

True Stereo Limiting Plus LEV-ALERT™

Adjustable limiters can operate in tandem, or individually as you prefer. And our Lev-Alert system can give you peak level audible tone warnings in your headphones when you can't watch the VU meters. Trust Lev-Alert to keep your standards high...even when it isn't easy!

Take A Close Look

When you examine the new AT4462



audio-technica®

1221 Commerce Drive, Stow, OH 44224 • (216) 686-2600

you'll see a host of other features to help you do your job: Cue on every channel...Separate headphone amplifier...Phantom power for all types of mikes...Three-frequency tone oscillators...Slate mike...Supplied carrying strap and protective case...Powered either by internal 9-volt batteries or any external 12-18 VDC supply, any polarity.

A New Era in Stereo Begins

We've made the new AT4462 a working tool that helps you and your staff take full advantage of the production values stereo has to offer. And a hands-on test will quickly prove it. To learn how the AT4462 can help you create better audio every day, call or write us now.

True 600Ω Stereo/Mono Outputs Mic/Line Level Out Mic/Line Switch on All Inputs 20 dB Pad on All Inputs

MODU-COMM™ Line Level Adjust


Limiter Level Adjust

External 12-18VDC Either Polarity

Cue on Each Input

Two Mono Inputs with Pan Controls

Slate Mic with Frequency-Selectable Tone

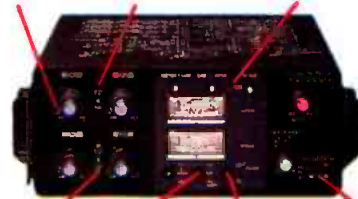

Phantom 12V Power for All Inputs All Inputs and Outputs Transformer-Coupled Flat/Lo Cut Filter on All Inputs 9V Internal Batteries (3) Strap Bracket Protects Face Headphone Outputs (2) MODU-COMM™ External Mic/Line Inputs Bus In/Out Two Stereo Inputs with Dual-Clutch Controls LEV-ALERT™ for Audible or Visual Peak Level or Limiting Warning Stereo Limiter Switchable to Dual Mono MODU-COMM™ Full Duplex Communication over Existing Mic Lines

Circle (112) on Reply Card

www.americanradiohistory.com

News

Continued from page 4

movies shot at 24 frames per second. A reduction in flicker, screen granularity and stroboscopic effects were observed. The films also were shown to audiences who concurred that the 30-frame-per-second productions were better quality.

Some technical considerations involved in a large-scale conversion to the higher frame rate were addressed, namely the need to alter motion-picture cameras, projectors and some post-production equipment. However, the group concluded that all modern cameras are capable of operating at the 30-frame-per-second rate in crystal sync. With regard to projectors, advanced technology has made them capable of being operated at the higher frame rate.

NRSC announces AM standards proposal

Additional voluntary standards to further reduce interference on the AM band were proposed by the National Radio Systems Committee (NRSC), at the Radio '87 Conference.

The standards would mask unwanted radio-frequency emissions and complement the NRSC standards being imple-

mented by AM stations to improve their audio and adhere to a uniform 10kHz bandwidth. Currently, undesired RF emissions from AM stations can cause interference to other stations on nearby frequencies. However, stations that implement and properly operate with NRSC's current audio and bandwidth standards are likely to be in compliance with the new proposed RF standards without making further modifications.

Citing a 1986 NAB technical report on AM overmodulation showing that "meeting Federal Communications Commission overmodulation limits is no guarantee of a clean signal," the NRSC proposal tightens out-of-band emission limitations for AM stations and assures an absence of "splatter" AM interference. The NRSC has established a 6-month public comment period.

NATAS honors award winners

Emmy statuettes for outstanding achievement in engineering development were presented by John Cannon, NATAS president, at the 10th annual National Academy of Television Arts and Sciences' Engineering and Scientific Awards Ceremony held in September.

The winners included:

- *Color Systems Technology* in recognition of its engineering contributions to the development of the technology for the conversion on videotape of original black-and-white images into color.
- *Colorization* in recognition of its engineering contributions to the development of the technology for the conversion on videotape of original black-and-white images into color.
- *Dubner Computer Systems* in recognition of its engineering contributions to the development of the technology for the conversion on videotape of original black-and-white images into color.
- *National Aeronautic and Space Administration* for its pioneering efforts in research of the application of Ku-band satellites for terrestrial communication.
- *Public Broadcasting Service* for its leadership and contributions in helping to develop more efficient UHF transmitter technology.
- *Society of Motion Picture and Television Engineers* for its recognition of the need for a component digital videotape recording standard, development of a recording system based on the worldwide standard for digital component sampling and cooperation with the EBU to provide the basis for a world standard for digital component videotape recording. [:-?(-:))]]]

Total Audio Control, Yet Very Affordable!



When the engineers at Superstation WGN-TV were ready for an audio rebuild, a product search led them to the Benchmark System 1000 DAs. With all the potential pitfalls in the audio chain, control was a key issue. The MTX-02 stereo control daughter board gave them complete control of output format on the stereo DAs. Remote selection between Left only, Right only, Mono mix, Discrete Stereo (normal and reversed channels), or Matrix stereo for M/S-mic ENG playback-decoding are all on the stereo DA! Remote right channel polarity inversion is the icing on the cake. WGN uses this combination with every VTR. "I have complete control," says Rick Craig, Project Engineering Supervisor. "No matter what production brings in, we can handle it." WGN even makes their SAP selections via daughter boards.

Discover the power of the daughter board. The MTX-02 is just one of four audio controllers. Find out how the finest DA system can also be the most cost effective.

Benchmark
the measure of excellence™

Call **NOW** 800-BNCHMRK, in NY 315-452-0400

BENCHMARK MEDIA SYSTEMS INC.
3817 Brewerton Rd. North Syracuse, NY 13212

Want To Talk Broadcasting?

SBENET ON COMPUSERVE

John Hoffman
Net
Administrator
76703, 1036

Circle (113) on Reply Card

Something you'll never have to do...



...if you own a Grass Valley switcher.

Whether you are in a live or post production environment, the moment of truth comes when the lever arm is finally moved. Peace of mind is knowing that your



Grass Valley Group switcher won't let you down.

There are four switcher

families with many possible configurations in the Grass Valley line up. From the now legendary Model 300, to the compact, yet extremely powerful Model 100, there are no better switchers anywhere. Every system has the quality, reliability and performance that professionals around the world know that they can expect from Grass Valley Group.

So, uncross your fingers and call us today. Let us

know your requirements, and we will offer a switcher tailored to satisfy your every need.

Grass Valley Group®

A TEKTRONIX COMPANY

 THE GRASS VALLEY GROUP INC.

P.O. Box 1114, Grass Valley, CA 95945 USA
Telephone (916) 478-3000
TRT: 160432

OFFICES: New York (201) 845-7988; District of Columbia (301) 622-6313; Atlanta (404) 493-1255; Chicago (219) 264-0931; Minneapolis (612) 483-2593; Dallas/Fort Worth (817) 483-7447; Los Angeles (818) 999-2303; San Francisco (415) 968-6680; GVG International Ltd. (UK) +44-962-843939; Grass Valley Group Asia (HK) +852-3-7396632

Model 100 Family Circle (200) on Reply Card
Model 200 Circle (201) on Reply Card

300 Series Circle (202) on Reply Card
1680 Series Circle (203) on Reply Card

Coordination software now available

By Bob Van Buhler

The latest version of the SBE's national coordinator software is now available for use by coordinators. The latest edition, version 1.01, incorporates several corrections and additions the committee felt were necessary. The software is available on disk to the national frequency coordinating council (NFCC) recognized frequency coordinators.

If you are interested in obtaining a copy, it can be downloaded in XMODEM BINARY format from CompuServe. Look

Van Buhler is chief engineer for WBAL-AM and WIYY-FM, Baltimore.



for file NFCC2.ARC/binary. All previous versions of the Clipper dBASE compiler, provided by the NFCC, should be replaced with this new version.

Gerry Dalton, national coordination chairman, and the NFCC subcommittee developed this software for the all-industry committee as a part of the society's contribution to the project. Members also are writing and editing a coordination manual for the NFCC. The NAB has agreed to print the publication, which should be ready in 1988.

The NAB has hosted all of the council's meetings, either at its Washington headquarters or by providing meeting rooms at the NAB convention each spring. The NFCC meets at least three times a year and comprises many broadcast companies and those individuals interested in spectrum management.

A well-coordinated papal visit

Coordinators across the country worked long and hard to assure effective spectrum management during the Pope's visit. An enterprising group from Chapter 53 spent many hours planning for his Miami visit. This event probably received more national attention because it was the first major event in his U.S. tour.

Tom Beauchamp, chief engineer of WTVJ-TV, Miami, worked from June until the visit, putting together an on-line frequency coordination database and keeping the files updated. The result of his continual calling and coaxing to many users and nearby stations was a complete frequency listing, which helped produce a successful visit.

Ralph Beaver, Tampa, FL, coordinator, and Don Anglin, combined the information with their own frequency-coordination data, which assured that local conflicts did not result. The final spectrum usage plan was published on CompuServe, Sept. 2, by Henry M. Seiden.

Check in on CompuServe

The CompuServe Broadcast Professional Forum (BPForum) is a potential source of valuable information for all engineers. A recent check of the files revealed the text changes of the society's

FCC filings, copious amounts of frequency-coordination data and the new Clipper compiler for frequency coordination. Some other interesting files include chapter newsletters for Milwaukee, Seattle and Little Rock, AR.

Communication within the society would be enhanced greatly if all chapters uploaded their monthly newsletters and meeting announcements. Some chapters find it difficult to come up with interesting programs. Being able to access other chapter newsletters could be a great source of programs and program sources. BPForum also is a good place to post information concerning the availability of manufacturers who provide programs, and to what areas they might be able to travel.

The NFCC's national frequency coordinator's list also is published on the BPForum. Because the list is updated regularly, you know the file you download is the most recent (and correct) version.

The national board of directors often uses the BPForum as a means of communicating with the membership. Richard Rudman, past president, often has filed informative texts concerning SBE positions and responses on a variety of topics. A good example is his reply to a magazine editorial, which criticized the SBE certification program.

The procedure for downloading or browsing through the data libraries is simple. The process is menu-driven, so just select the desired action from the available options. Table 1 lists the menus and response used for a typical computer.

Give it a try. There is a lot of useful information in the SBE area. The forum provides a convenient way to communicate with other broadcast engineers and to receive up-to-date information on a wide variety of topics.

After entering CompuServe, type: (user responses in italics)	
go BPForum	
BPForum FUNCTIONS	
1 (L)	Leave a message
2 (R)	Read messages
3 (CO)	Conference mode
4 (DL)	Data libraries
5 (B)	Bulletins
6 (MD)	Member directory
7 (OP)	User options
8 (IN)	Instructions
Enter choice !DL7 (you can also enter 4 and CR)	
DL 7 - SBENET	
1 (DES)	Description of data library
2 (BRO)	Browse through files
3 (DIR)	Directory of files
4 (UPL)	Upload a new file
5 (DOW)	Download a file
6 (DL)	Change data library
7 (T)	Return to function menu
8 (I)	Instructions
Enter choice !read DL7.CAT	
The system will then scroll through the file, providing information on each of the programs/files available in this data library.	

Table 1. The above table shows what your computer terminal will display on CompuServe once you issue the command: go BPForum.

!:-)))))

Withstanding The Test of Time



Like the proud, serene monuments of another age, Neve stands alone as manufacturers of the most enduring, reliable broadcast recording consoles in the industry. It takes the same kind of ingenuity, vision and advanced technology to be the architects of a line of products that range from 8 input stereo remote consoles to 96 input, 48 bus production consoles, standard and custom designed. And all with the same pristine performance.

Unique Formant Spectrum Equalization and comprehensive Dynamics, together with the acclaimed sound of Neve, produces the facilities and benefits for the finest broadcast consoles around the world.

Neve . . . Wonder of the World of Sound



Neve

Rupert Neve Inc.
A Siemens Company


RUPERT NEVE INC., BERKSHIRE INDUSTRIAL PARK, BETHEL, CONNECTICUT 06801, U.S.A.
TELEPHONE: (203) 744-6230. TELEX: 96 9683. FACSIMILE: (203) 792-7863.
NY: TEL. (212) 956-6464 • CA: TEL. (213) 874-8124 FACSIMILE: (213) 874-1406 • TN: TEL. (615) 385-2727 TELEX: 78 6569
NEVE ELECTRONICS INTERNATIONAL LIMITED, MELBOURN, ROYSTON, HERTS SG8 6AU, ENGLAND
TELEPHONE: ROYSTON (0763) 60776. TELEX: 81381. CABLES: NEVE. CAMBRIDGE. FACSIMILE: (0763) 61886

Circle (115) on Reply Card.

Storage system, video center and videotape truck

The *Winsted Corporation* has introduced the following products:

- The TapeCube videotape storage system can store any brand of 1/2-inch Beta-size tape cassettes without covers in less space, in any cabinet or open wall area. The system is an injection-molded ABS plastic cube that accommodates five 1/2-inch Beta cassettes. The cube attaches to an aluminum extrusion hanger bar that fastens to any open wall space, or can be added to an existing hanger system. Pressure-sensitive vinyl labels on both the cube and cassettes provide identification.
- A/V carts are available in 34-inch heights with two or three shelves, and in 54-inch heights with three or four shelves. It is constructed of welded steel. It is finished in shadow gray baked enamel with chrome legs. All models feature 4-inch swivel casters (two locking).
- A programming videotape truck is equipped with eight aluminum hanger bars to accommodate the TapeCubes, 1/2-inch and 3/4-inch tape shelves, and hanger cases for Sony, Ampex and 3M tapes. A stand-up work surface is provided, with adjustable height in 1-inch increments. The truck moves on 4-inch dual wheel casters.

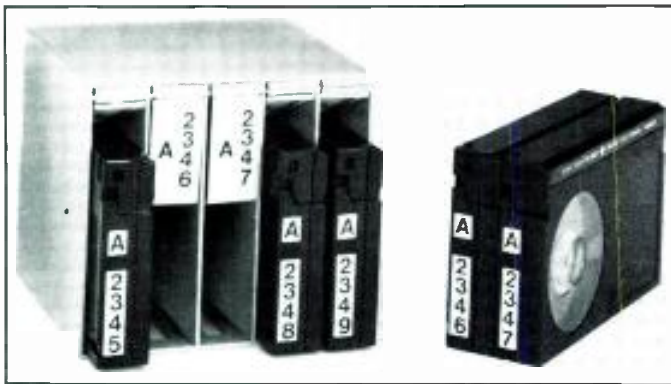

TapeCube storage system

Circle (350) on Reply Card

Fiber-optic repair kit

Jensen Tools has introduced the JTK-63, a comprehensive tool kit for work with fiber optics. It contains all the tools and materials needed to repair and terminate high-quality, ready-to-use fiber cable. The kit is recommended for use with SMA Amphenol 905- and 906-type connectors or other compatible SMA styles and for terminating a wide variety of single and bundled optical fiber cable. It contains tools and supplies for cleaving, stripping, polishing, buffing, crimping and inspection, plus heat gun, lapping film, epoxy, wash bottles, beakers, tissue wipes and an instruction guide. The tools and supplies are foam-protected within a polyethylene case.

Circle (351) on Reply Card

RF pulse reflectometer

TLH Heucke has announced the model 858 selective RF pulse reflectometer. It locates and measures reflections in transmitter antennas. The instrument is portable and can be used for the checking and aligning of (stacked) VHF/UHF sound and TV antenna systems and receiving-antenna networks. The distance to and reflection from each reflection point are shown on an LCD. The reflectometer is based on the transmitted pulse-modulated RF carrier signal and the selective receiver for time-domain measuring of the reflections. The selective measurement technique with the limited spec-

trum of the short (100ns) $\cos^2$ -shaped RF pulses and low VSWR of the built-in wideband directional coupler enable precise attenuation and return loss measurements up to 42dB. A high amplitude of minimal +19dBm of the RF pulses eliminates problems with interference signals. Both the reflections and the transmitted pulse are simultaneously shown on a CRT screen. Features include a zero-setting, XY-recorder output, ac and 12Vdc-20Vdc supply.



Circle (352) on Reply Card

Wireless microphone series

HM Electronics has announced the 50 series of wireless microphones. The series features a dual-frequency body-pac and a switching-diversity receiver. The NRX-II noise-reduction system is optimized for wireless mic applications. Other features of the wireless mic series include mic-mute and power-switch lockouts and operator selectable RF frequency selection on the body-pac system.



Circle (353) on Reply Card

Time base corrector

Broadcast Systems Design has introduced the TBC501, a new design for time base correction, incorporating after-the-fact white balance, horizontal enhancement and pixel-by-pixel dropout compensation. Based on its sampling rate, the product offers increased bandwidth, low residual error and eliminates chroma shimmer. The dub in/out capability makes it suitable for Super VHS applications.


Circle (354) on Reply Card

Transponder selector

Designer Electronics has introduced the SA-257A transponder selector. It is designed for the Scientific-Atlanta DAT-32 digital audio receiver. The transponder crystal switch turns the DAT-32 into a dual transponder receiver with electronic switching control. The selector plugs directly into the downconverter. The user need only to wire 15V from the back of the downconverter and to supply a control voltage to switch from one network to another on different transponders.

Circle (355) on Reply Card

The new standard of dependability: VHF TV transmitters from NEC.

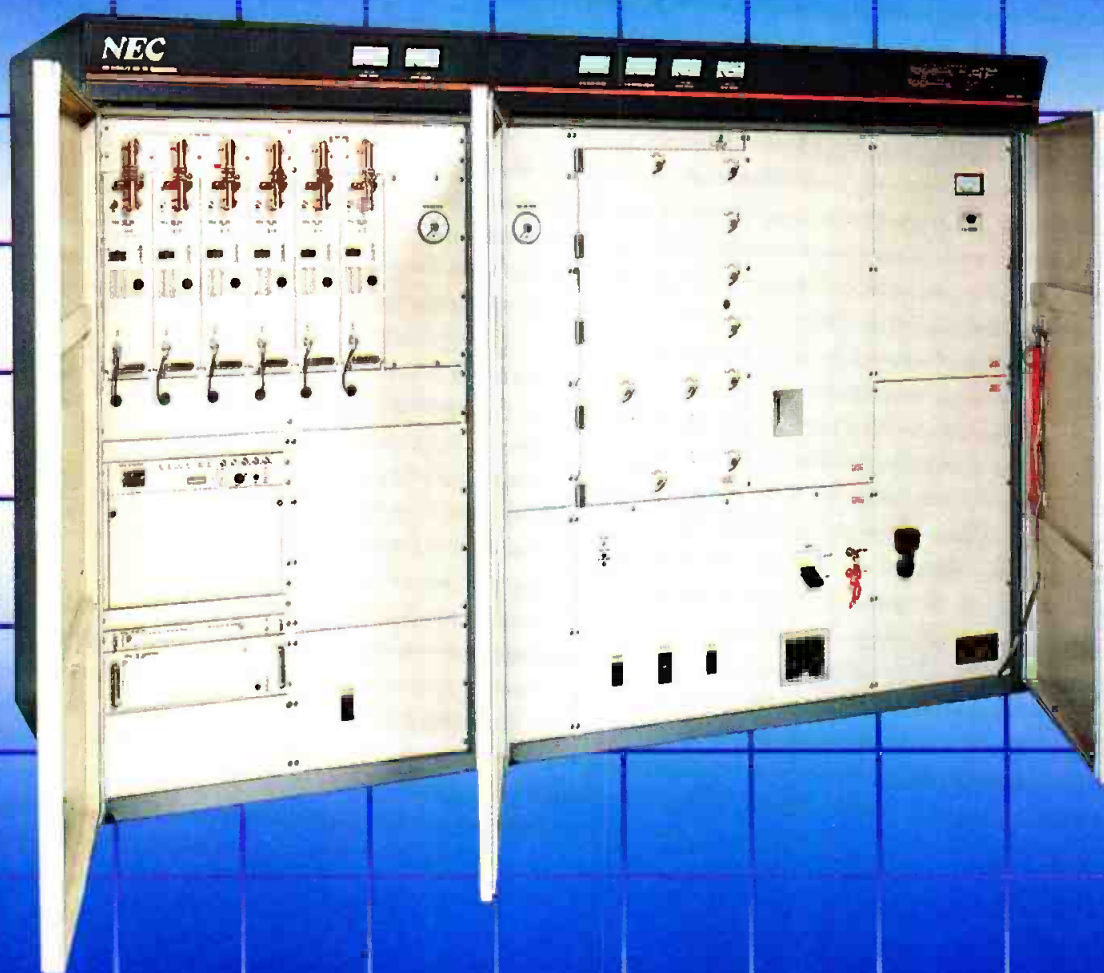

35kW high-band and 30kW low-band models meet your needs for the next decade.

High power transmitters are a major investment. You have to work with them, maintain them, and profit from them over the years. Our PCN-1400 Series transmitters reward your investment. Because they give you over a decade's worth of daily dependability, easy maintainability and superior performance.

SINGLE-UNIT, HIGH-PERFORMANCE EXCITER.

Our hybrid IC technology slashes component count by 30%—thereby boosting reliability, making it

possible to build all modules into a single unit. Design refinements include sophisticated circuits to correct linearity, and stereo capability without modification.



HIGH-POWER TRANSISTOR PA.

The solid state PA uses high-power, high-gain transistors newly developed by NEC.

The aural section is 100% solid state. There's only one tetrode in the final video amp.

The PCN-1400 Series gives you a wide choice of models from 500W to 35kW, high or low channels. And all models up to 10kW are 100% solid state.

30 YEARS EXPERIENCE, 1,600 INSTALLATIONS.

NEC has installed over 1,600 transmitters in 30 years. We back our customers with 24-hour service. So take the risk out of your next investment. Call NEC and find out about the new standard of dependability in TV transmitters.

NEC America, Inc.
Broadcast Equipment Division,
1255 Michael Drive, Wood Dale, Illinois 60191
Tel: 312-860-7600.

C&C

Computers and Communications

Circle (116) on Reply Card

NEC

OUR FM MONITOR DESERVES A SECOND GLANCE.

BUT IT DOESN'T NEED IT.

Engineers look twice when they first see our 691 Stereo and SCA Monitor. But when they start to use it, they find the 691's meters are easily tracked in a single glance. Like everything else about the 691, its measurement displays are very well thought out.

A color-coded system ties together the associated displays, switches, and jacks for a particular function or test. Select your test by pushing a color-coded button and simply read the results on *all* of the indicators. It's as easy as it sounds.

Other benefits of the 691 include over 40 proof-of-performance and signal quality measurements. Add a scope and use the 691 as a spectrum analyzer . . . or get a vector display of L/R phasing. Perform a Bessel-Null calibration in minutes. Measure clipped composite accurately and quickly.

The 691 can now be optionally ordered to measure two SCAs. There are many other features . . . write or call for complete information.

QEI Corporation

One Airport Drive □ P.O. Box D
Williamstown, NJ 08094 □ (609) 728-2020

Call Toll Free (800-334-9154)



Circle (117) on Reply Card

Time base corrector and color corrector

Fortel has introduced the following products:

- The Turbo 2 time base corrector for PAL format for use with ¾-inch video recorders uses dub processing and is compatible with Sony SP machines as well as other ¾-inch machines. It accepts highband or lowband inputs, automatically detecting and switching for either. The unit also will handle dynamic tracking signals to allow DT play and provides pictures during high-speed shuttle. Other features include noise reduction, infinite window TBC, field or frame freeze with interpolation and horizontal enhancement.
- The WORKLINE series DHP 625 time base corrector provides signal processing for ½-inch and ¾-inch PAL composite video signals. It features infinite window correction, field and frame freeze, dropout compensation, high-speed shuttle, horizontal enhancement and noise reduction.
- The CC-2 color corrector provides broadcast-quality control of video color in all common component formats. Component operation is provided for RGB or Y, R-Y, B-Y for use with Beta and M-II formats. Plug-in PC boards permit reconfiguration for either 525 or 625 standards. The unit includes black, white and gray color-balance adjustment, black-and-white gamma control, standard proc-amp controls and independent hue, saturation and luma adjustments for each of the six color derivative vectors.



Circle (356) on Reply Card

SIERRA VIDEO SYSTEMS COMPONENT VIDEO

(ie: RGB) WHERE ALL VIDEO BEGINS & ENDS.
TO PRODUCE & RECORD IN COMPONENT VIDEO



- ALLOWS CRAWL FREE KEYS
- WIDE TIMING FLEXIBILITY- NO SUBCARRIER TIMING TO DEAL WITH
- NATURAL ENVIRONMENT OF COMPUTER GRAPHICS
- AVAILABLE NOW
- COMPATIBLE WITH HDTV, DIGITAL & FUTURE FORMATS

**OUR PRODUCTS PROVE
OUR COMMITMENT TO
COMPONENT VIDEO**

- ROUTERS (VIDEO & AUDIO)
- FORMAT CONVERTERS
- INSERT KEYS/ MIXER
- DISTRIBUTION EQUIPMENT
- SIGNAL GENERATORS
- BETACAM™ & MII™ ACCESSORIES

FOR MORE INFORMATION WRITE OR CALL
P.O. BOX 2462 GRASS VALLEY CA. 95945 (916) 273-9331

Circle (211) on Reply Card

Professional services

VIR JAMES P.C.
CONSULTING ENGINEERS
Applications and Field Engineering
Computerized Frequency Surveys
3137 W. Kentucky Ave.—80219
(303) 937-1900
DENVER, COLORADO
Member AFCCE & NAB

International Map Service
PO Box 19037 Denver, Colorado 80219

1-800-426-TOPO (8676)

Topographic
Geological

Aviation
BLM Surface

EVANS ASSOCIATES

CONSULTING TELECOMMUNICATIONS ENGINEERS
AM-FM-TV-CATV-ITFS-LPTV SATELLITE
216 N. Green Bay Road
Thiensville, Wisconsin 53092
Phone: (414) 242-6000 Member AFCCE

FCC ON-LINE DATABASE
dataworld®
Allocation/Terrain Studies
AM • FM • TV • LPTV • ITFS
P.O. Box 30730
Bethesda MD 20814
(301) 652-8822 1-800-368-5754

D. L. MARKLEY
& Associates, Inc.
CONSULTING ENGINEERS
2401 West Moss Ave.
Peoria, Illinois 61604
(309) 673-7511
Member AFCCE

CHIPS DAVIS
LEDE DESIGNS, INC.
**Acoustics for Stereo
Facility Design
Consultation**
(415) 459-2888

TEKNIMAX
TELECOMMUNICATIONS

DENNIS R. CIAPURA
PRESIDENT

11385 FORESTVIEW LN.
SAN DIEGO CA 92131 (619) 695-2429

SMITH and POWSTENKO
Broadcasting and Telecommunications
Consultants

2033 M Street N.W., Suite 600
Washington, D. C. 20036
(202) 293-7742

BLAIR BENSON

Engineering Consultant
TV Systems Design and Operation
23 Park Lane
Norwalk, CT 06854
203-838-9049

BROADCAST SYSTEMS GROUP

EDIT SYSTEM SUPPORT
• Engineering
• Consultation
• Systems Support
• Technical Training
• New Product Development

808 BLANKS
P.O. Box 65 Brookhaven, LI New York 11719
(516) 286-1252

JOHN H. BATTISON PE.
CONSULTING BROADCAST ENGINEER,
FCC APPLICATIONS AM, FM, TV, LPTV
Antenna Design, Proofs, Fieldwork
890 Clubview Blvd. North
Columbus, Ohio 43085
614/888-3364

Robert J. Nissen
THE NISSEN GROUP, INC.
Communications Technology Consultants
32 Ridge Drive • Port Washington, New York 11050
(516) 944-5477

COMMUNICATIONS INC.
• Radio and Television System Design
• Transmitter and Studio Installation
• Microwave and Satellite
Engineering and Installation
12 North Willow St.
Montclair, NJ 07042
201-746-9307

**MAILING LABELS
AM, FM & TV
CALL
dataworld®**
1-800-368-5754

ERIC NEIL ANGEVINE, P.E.
consultant in acoustics
specializing in broadcast studio acoustics

910 Lakeridge Drive Stillwater, OK 74075
405-624-6043 405-372-3949

ATT: CHIEF ENGINEERS
broadcast video maintenance
LUNAR VIDEO LTD.
FAST TURNAROUND ON ENG. EFP, EDIT
SYSTEMS, MONITORS, TEST EQUIP, SONY, JVC,
PANASONIC, TEKTRONIX—UPS & AIR FREIGHT,
PULDEL DAILY
CALL
COLLECT
138 E. 26th St, NYC (212) 686-4802

Consultation Services
Lightning • Power Conditioning • Grounding
Over 40 years experience, work guaranteed

Roy Carpenter
President

Lightning Eliminators and Consultants
13007 Lakeland Rd., Santa Fe Springs, CA 90670
(213) 946-8886 TWX 910-586-1381

PATCHPRINTS Video Tie Lines
In 1 2 Aus 1 2 Mon A B
Custom Patch Bay Labeling for the Audio/Video Industries
By
PATCH BAY DESIGNATION COMPANY
Div. of Glendale Rubber Stamp & Printing Co., Inc.
CHARLIE SCHUFER
P.O. Box 6278, Glendale, CA 91205
4742 San Fernando Road
Glendale, CA 91204 Telephone
(818) 241-5585

ENG SERVICE Bill Nelson
Chief Engineer
V T R Associates, Inc.
Prompt TURNAROUND on
1/4" editors, color ENG cameras.
3023 Holiday Drive, S.W. Phone
Huntsville, AL 35805 (205) 533-0571

**UNUSED
CALL LETTERS
CALL
dataworld®**
1-800-368-5754

**TOWER DESIGN AND
FABRICATION, INC.**
TOWERS, ANTENNAS, STRUCTURES
New Tall Towers, Existing Towers
Studies, Analysis, Design Modifications,
Inspections, Erection, Etc.
Rt. 1, Box 33AA,
Sturgeon, MO 65284 (314) 687-3932

Buying Service For Broadcasters
Our Buying Power Will Save
Your Company Significant Dollars
22 Years Broadcast Equipment Purchasing Expertise
(212) 541-6611
BUYGROUP LIMITED
1775 Broadway, NY, NY 10017

Engineering Consultant

• Video Systems Design
• Computer Graphics
• Automation
• Editing
• Production

Gene De Santis
181 Long Hill Rd.
Little Falls, NJ 07424
201-256-8141

MAILING LABELS AM, FM & TV
*Personalized to Manager, Engineer
or Program Director.
*Pre-sorted by Zip Code.
*Market selection.
*Accurate.
*\$40.00 per 1,000
StationBase
P.O. Box 24092
Phoenix, AZ 85282
(206) 385-3029 or (602) 899-8916

New! Inexpensive Center Track Time-Code for Non-TC Audio Machines.



Now you can make your 2-track machines synchronizer-ready for a fraction of the cost of a new machine. Otari's new TC-50 Time Code/FM Processor is primarily designed for the Otari BII or Mark III-2, but it is also adaptable to most 4-head-position 1/4" tape recorders.

So if your older machines have just been gathering dust, or if you're looking for a way to get synchronizer-ready performance at low cost when you buy a new machine, the TC-50 is the answer. From Otari; Technology You Can Trust.

Contact your nearest Otari dealer, or Otari at (415) 592-8311.

OTARI

© Otari 1987

Circle (215) on Reply Card

ISOLATION WITHOUT DEGRADATION The Best Audio Transformer

- Wide bandwidth
- No overshoot or ringing
- Flat group delay
- Low hysteresis distortion

jensen transformers
INCORPORATED

10735 Burbank Blvd. • North Hollywood, CA 91601
(213) 876-0059

Visitors by appointment only. Closed Fridays

Circle (214) on Reply Card

Rare & Hard-to-Find

Professional video supplies & accessories for recording, production & broadcasting at the best prices in America — the industry's most unique catalog!

Call or write now for your free copy:

MarkerTM
Technologies of America

145 Ulster Ave. • Saugerties, NY (USA) 12477
800-522-2025 • in NY 914-246-3036

Circle (213) on Reply Card

up to **65% OFF**

Call Toll-Free: 1-800-426-3938
(In Iowa, 1-800-272-6459)

■ More than 400 stage, studio and projector lamps from G.E., Sylvania and Wiko in stock.
■ 12-hour turnaround guaranteed.
For free price list write: Box 10,
702 E. Washington, Washington, IA 52363
Since 1964

Sellers

Circle (217) on Reply Card

AUDIO FOLLOW VIDEO MONITOR SWITCHERS

MODEL MS-6 SERIES

- VCR Monitoring
- Monitor Selectors
- Time code follow video
- Machine control delegate
- Switchers available up to 18 positions—16 levels

Jem-Fab Corp.

"The Electronics Construction Company"
574 Sunrise Hwy • Baldwin, N.Y. 11510
(516) 867-8510 • (516) 867-8511

Circle (218) on Reply Card

Classified

Advertising rates in Classified Section are \$1.50 per word, each insertion, and must be accompanied by payment to insure publication.

Each initial or abbreviation counts a full word. Minimum classified charge, \$35.00.

For ads on which replies are sent to us for forwarding (blind ads), there is an additional charge of \$40.00 per insertion, to cover department number, processing of replies, and mailing costs.

Classified columns are not open to advertising of any products regularly produced by manufacturers unless used and no longer owned by the manufacturer or distributor.

TRAINING

ELECTRONICS DEGREE by correspondence. Earn Associate, then Bachelor's. NHSC accredited. Free catalog. Write Grantham College of Engineering, Dept. EE-5, 10570 Humbolt St., Los Alamitos, CA 90720. 8-82-tfn

FCC GENERAL RADIOTELEPHONE operators license through cassette recorded lessons at home plus one week seminar in Boston, Washington, Detroit or Philadelphia. Our twentieth year teaching FCC license courses. Bob Johnson Radio License Preparation, 1201 Ninth, Manhattan Beach, Calif. 90266. Telephone (213) 379-4461. 8-81-tfn

SERVICES

ONE STOP FOR ALL YOUR PROFESSIONAL AUDIO REQUIREMENTS. Bottom line oriented. F.T.C. Brewer Company, P.O. Box 8057, Pensacola, Florida 32506. 7-71-tf

TRANSMITTER TUBE REBUILDING SINCE 1941: 3CX2500, 4CX5000, 4CX15000 and many others. Write for details. FREELAND PRODUCTS INC., Rt. 7, Box 628, Covington, LA 70433. (504) 893-1243 or (800) 624-7626. 6-79-tfn

FOR SALE

RCA COLOR TELECINE SYSTEM, New/unused. To include: TK-66, color camera, TP-66, 16mm telecine projector, TP-7, 35mm slide projector, TP-55B, camera multiplexer. Write to: P.O. Box 23555-273, San Diego, CA 92123. 1-86-tfn

TRANSMITTERS. Need a standby transmitter? M/W? Want to get on the air but can't afford state-of-the-art equipment? Have a look at these tried-and-true oldies, then give us a call. Most are still in service and scheduled to be replaced by the end of 1987 or early 1988. As is, where is: TV/CBE/25KW/4TTC90D1S, C/W RCA/CTM-10 EXCITER; 5TX/S/TV/RCA/2KW/TT-2BH; TV/RCA/250W/TTL-200H; TENS IN PARALLEL/FM/RCA/BTF-20D; AM/10KW/GATES/BC-10P; AM/40W/MCCURDY/IRT-3; 3 UNITS/M/W/RATHEON/KTR2/7GHZ. Canadian Broadcasting Corporation, 7925 Cole St., Luc Road, Montreal, Quebec, H4W 1R5, Canada, Tel. 514-485-5583, Attn: D. Ultaro. 10-87-21

SEALED BIDS WILL BE RECEIVED until 9:00 A.M., Thursday, December 3, 1987 for the "Sale of Used G.E. TV Transmitter". For more information contact Mr. Jim Moore, KOMU-TV Station, Highway 63 South, telephone (314) 442-1122, University of Missouri—Columbia, Columbia, Missouri 65211. 10-87-21

TEKTRONIX TEST EQUIPMENT 521A Pal Vectorscope \$3000, 1481R Pal WFM \$3000, 1430 Random Noise \$1500, 1480C WFM \$3000. (818) 352-6619. 10-87-21

COPPER!#8 & #10 ground radials; 2, 3, 4, 6, 8" strap; flyscreen; ground screen. 317-962-8596. Ask for copper sales. 11-87-61



Don't Lose Your Head!
Check Head Wear On All Video Formats
With Our Head Profusion Gauge

Other Gauges For VCR Repair...
✓ Dial Torque Gauge ✓ Tape Tension Gauge
✓ Spindle Height Gauge

TENTEL

1501 East Ave. • Campbell, CA 95008

(800) 538-6894
(408) 379-1881

Circle (216) on Reply Card

Routing switcher

Adrienne Electronics has introduced the AEC-1, a 10x1 wideband video and stereo audio routing switcher. Standard features include 30MHz video bandwidth, dc restored video, two audio channels, breakaway switching, crosspoint memory and broadcast-quality specifications. Options include a third audio channel for SAP or time code, remote-control panels, a serial interface, RGB/component switching, input expansion to 100x1 and output cable equalization and customization.

Circle (357) on Reply Card

Computerized audio console

Richmond Sound Design has introduced the Command/Cue 4096 computerized audio console. The console may be configured into many sizes of theater sound effects matrix systems. It may be used in conjunction with live P.A. mixers running mics while the computer is running taped effects and presetting levels. The console is a modular card frame system that is controlled by software specially designed on the Amiga computer system. The DCA-8 card is used for the level matrix and has eight digitally controlled attenuators with 60 1.5dB steps. The DMF-8 card is used for master input levels and is identical to the DCA-8, but with 240 0.395dB steps. Each card has a signal noise ratio of more than 100dB and total harmonic distortion of less than 0.03%. The DAP-8 card has eight patented digital auto pans. The pans will fade up, down or crossfade levels.


Circle (358) on Reply Card

Contactless De-Soldering and Soldering

with the Leister-Labor "S" Hot Air Tool

Electronic Temperature Adjustment from 20 to 600°C.
Electronical Air Volume Adjustment from 1 to 150 litres per minute.

For contactless de-soldering and soldering of SMD and DIP components in 2-4 seconds.

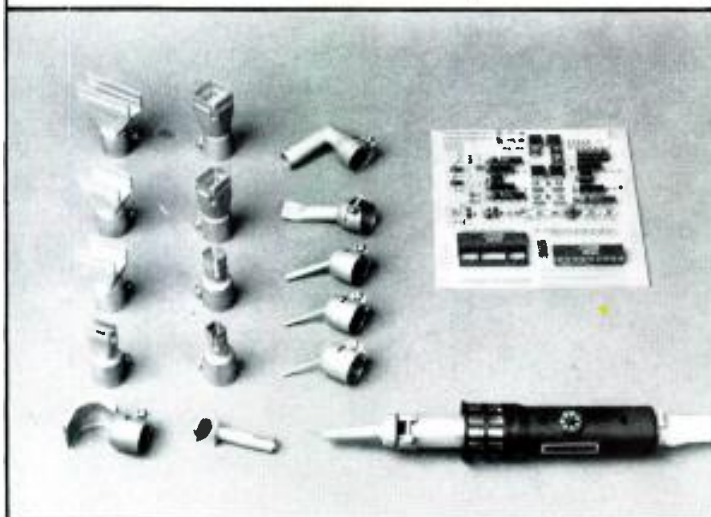

ASK FOR FREE BROCHURE UW 107

Brian R. White Co. Inc., 313 Henry Station Road
Ukiah, CA 95482 phone: (707) 462-9795
Farmingdale, NJ 07727 phone: (201) 938-2700

Circle (212) on Reply Card

Perfect Timing

MASTER CLOCK SYSTEMS



MASTER CLOCK SYSTEMS

If seeing the same time on all your clocks is important, select **ES 192E-Line** frequency timebase, for only \$376.

If a guaranteed accuracy of three seconds per month is what you want, choose **ES 160**—\$1250.

How about one second per month? **ES 160/1**—\$1450.

Or National Bureau of Standards accuracy! **ES 199** is synchronized to Radio Station WWV to provide a Master with unquestioned accuracy. \$1687 with receiver and antenna.

ESE Master Clock Systems are simple to install. All Masters have a Serial Time Code output, able to drive twenty slave displays without buffering. Slaves range in size from .4" LED to 2" LED displays, priced from \$183 to \$520.

IF YOU ALREADY HAVE A SYSTEM AND WANT TO EXPAND IT, get the **ES 167B** Serial Time Code Generator (\$169), then add any number of our low cost slaves.

Many, many options and accessories are available. Ask us about them. Our brochure tells the whole story, but not for long. We keep adding new products.



Write, Wire or Call: (213) 322-2136
142 SIERRA STREET • EL SEGUNDO, CALIFORNIA 90245

Circle (118) on Reply Card

Fiber-optic transmission system and teleproduction unit



87 EZ-LINK transmission system

Grass Valley Group has introduced the following products:

- The Series 87 EZ-LINK fiber-optic transmission system for distribution of video and audio signals features LED and laser transmitters for distribution up to 8km. An FM square wave carrier eliminates video distortion due to optical system nonlinearities and delivers signal-to-noise performance of 60dB. Frequency response of 10MHz provides compatibility with standard NTSC or PAL baseband video. The system can be configured in an 8-module rack-mount tray or a 2-module

wall-mount version.

- The IPS-100 full-capability teleproduction unit accommodates four VTRs via RS-422 serial control. It features JOG-PAD, a touch-pad for editor control. Other features include an edit controller, a model 100 production switcher, an AMX-170 audio mixer and sync and pulse generators with test signal—all incorporated into a single chassis.

Circle (361) on Reply Card

Satellite news van

DALSAT has announced the Roadrunner, a small, lightweight satellite news van. It features an Andrew 2.3 meter antenna. The air-transportable vehicle measures 21 feet long and 8 feet 6 inches tall. It can be equipped with redundant satellite electronics, communications, video and audio processing, edit and microwave systems.

Circle (362) on Reply Card

Laser video system

Artel Communications has introduced an addition to its SL3000 broadcast video system. The T3065 is a low-power laser transmission system. It is designed to transmit EIA 250B standard audio-video signals up to 25km over a single mode fiber. The unit uses a low-power 1,300nm laser as its optical source. The system is designed to make broadcast video available for medium distances on single mode fiber.

Circle (363) on Reply Card

||:~:~))||

SONEX CONTROLS SOUND.



With its patented anechoic foam wedge, SONEX absorbs and diffuses unwanted sound in your studio. And it can effectively replace traditional acoustic materials at a fraction of the cost. SONEX blends with almost any pro audio decor and looks

clean, sharp, professional. Check into this attractive alternative for sound control. Call or write us for all the facts and prices.

SONEX is manufactured by Illbruck and distributed exclusively to the pro sound industry by Alpha Audio.

Alpha Audio.
2049 West Broad Street


Richmond, Virginia 23220 (804) 358-3852

Acoustic Products for the Audio Industry

Circle (119) on Reply Card

AC POWER PROTECTION

FREE CATALOG

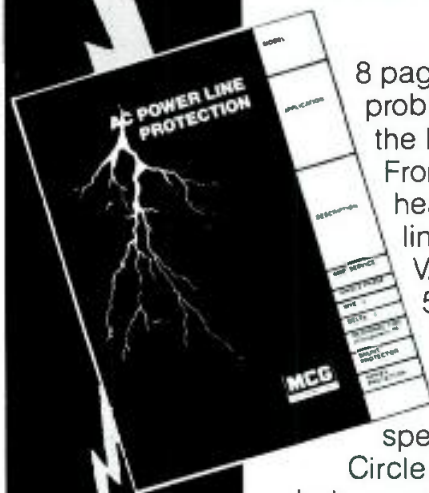

8 pages. The problems, the causes, the MCG solution. From plug-in to heavy duty power line protectors. 120 VAC to 480 VAC, 5A to 5000A, 1 phase, 3 phase delta, wye, etc. Applications, specs, prices.

Circle the number below or call.

MCG
ELECTRONICS INC.

MCG Electronics, Inc.
12 Burt Dr., Deer Park, NY 11729
(516) 586-5125

Circle (120) on Reply Card

1983 FORD ECONOLINE 350 EFP Van, less than 3,000 miles. With two Honda EV-4000 Generators, dual air cond. system. Hitachi HR-200 with Microtime 2525, Hitachi HR-211 with HST/sio-mo. Ikegami color monitors, 3 Hitachi SK-91 cameras with base stations, 12:1 Fuji glass, 600' cable. Also Ramsa audio, Quanta Q-7B CG, Clearcom 4 channel ICM, A/V Patchbays, full Tek and Hitachi waveform and vector monitoring. **READY TO ROLL!** Make offer. Steve Coulam, KDVR-TV, 100 Speer Blvd., Denver, CO 80203 (303) 831-8831. 11-87-11

RCA TP-66 proj. "NEW" \$14K ea.; \$25K pair. SIMBER BROADCAST SERVICES, INC., 609-435-1091. 11-87-11

KEGAMI HL-83 2nd GENERATION 13-1 x 2 Canon lens. Low hours. \$8000/OBO. Intermedia, 1-800-553-8336. 11-87-11

WANTED TO BUY

HIGHEST PRICES for 112 Phase Monitors, vacuum capacitors and clean, one kw or greater powered AM and FM Transmitters. All duty and transportation paid. Surplus Equipment Sales, 2 Throncliffe Park Dr., Unit 28, Toronto, Canada M4H 1H2, 416-421-5631. 3-86-tfn

WANTED: WW-II German and Japanese radio equipment. Unused US Navy and Signal Corps radio equipment before 1943. Pre-1923 radio equipment and tubes. August J. Link, Surcom Associates Inc., 305 Wisconsin Ave., Oceanside, CA 92054, (619) 722-6162. 7-86-11

WANTED TO BUY: Quick cash for TV studio equipment. We buy tripods, camera pedestals, lights, dimmers, drapes, prompters. What do you have? 312/365-5666. 11-87-11

EMPLOYMENT SERVICES

WE PLACE ENGINEERS

ALL CATEGORIES FOR TV, PRODUCTION, VIDEO, CATV (EXCLUDING OPERATORS)

America's Leading Source for a Decade

TV STATIONS PRODUCTION FACILITIES CORP TV MFG CATV

For information phone or write Mark Kornish



key systems

479 Northampton Street
Kingston, PA 18704

Employer
Paid Fees

(717) 283-1041

Advertising sales offices

CHICAGO, ILLINOIS

Tom Nilsen
Telephone: (312) 435-2361
Telefax: (312) 922-1408
55 East Jackson
Ste. 1100
Chicago, IL 60604

NEW YORK, NEW YORK

Diane Gottlieb-Klusner
Telephone: (212) 702-3404
Telefax: (212) 702-7802
Josh Gordon
Telephone: (212) 702-3405
Telefax: (212) 702-7802
866 Third Ave.
New York, NY 10022

SANTA MONICA, CALIFORNIA

Herbert A. Schiff
Telephone: (213) 393-9285
Telefax: 213/393-2381
Jason Perlman
Telephone: (213) 458-9987
Telefax: 213/393-2381
Chris Woodbury-Leonard
Telephone: (213) 451-8695
Telefax: 213/393-2381
Schiff & Associates
501 Santa Monica Blvd., Ste. 504
Santa Monica, CA 90401

NORWOOD, AUSTRALIA

Hastwell, Williamson, Rouse Pty. Ltd.
P.O. Box 419
Norwood 5067, Australia
Telephone: 332-3322
Telex: AA87113

LONDON, ENGLAND

Nicholas McGeachin
Intertec Publishing Corp.
Roseleigh House
New Street
Deddington
Oxford OX5 4SP
England
Telephone: (0869) 38794
Telefax: (0869) 38040
Telex: 837469 BES G

TOKYO, JAPAN

Haruki Hirayama
EMS, Inc.
Sagami Bldg., 4-2-21, Shinjuku
Shinjuku-ku, Tokyo 160, Japan
Telephone: (03) 350-5666
Cable: EMSINCPERIOD
Telex: 2322520 EMSINCJ

HELP WANTED

FIELD ENGINEERS AND VIDEO TECHNICIANS: La-Kart Corp. is looking for experienced field engineers and technicians to join its expanding operations in Newton, Mass. La-Kart Corp. manufactures television automation products including AL's, the Automated Library System. Applicants must know television maintenance (including VTR's, VCR's and computer editors) and be knowledgeable about microcomputers and memory products. Send a resume to La-Kart Corp., 287 Grove Street, Newton, MA 02166, Attn: Engineering Manager. EOE. 11-87-11

**Want more information
on advertised products?
Use the
Reader Service Card.**

RADIO AND TV BROADCAST TECHNICIAN for studio and transmitter maintenance. Must have 5 years experience in cameras, videotape machines and transmitter repair. Salary USD22,000 to USD28,000 P/A — commensurate with ability. Write: The Operations Manager, Bermuda Broadcasting Co., Ltd., P.O. Box HM 452, Hamilton HM BX Bermuda. 11-87-11

SENIOR MAINTENANCE ENGINEER opening in upstate New York. Large facility loaded with the newest state-of-the-art equipment. Must be capable of troubleshooting studio equipment to the component level. Experience in maintaining digital and microprocessor-based equipment required. UHF experience a plus. Send resume and salary history to: WXXI Personnel Dept., P.O. Box 21, Rochester, NY 14601. EOE. 11-87-11

THIS IS IT! If you can lead television Chief Engineers and interface with top management, if you possess boundless energy and heavy RF experience, we need to talk. Excellent opportunity for hands on, highly qualified leader. EOE. Respond to Dept. 686, Broadcast Engineering, P.O. Box 12901, Overland Park, KS 66212. 11-87-11

TV BROADCAST ENGINEER needed with FCC First Phone license or TV SBE certification. Heavy TV broadcast equipment maintenance experience required. Contact Mervin Ainsworth CE, WKTV, Box 2, Utica, NY 13503. EOE. 11-87-11

FIELD PRODUCTION ENGINEER: Respected, client-oriented Los Angeles video facilities company requires key engineer with strong systems/video/maintenance background. Single and multiple camera location production demands a thorough knowledge of Ikegami 79EAL and EC-35 cameras, all field/studio recording formats, ultimate, video switchers, and audio equipment. Send resume to Tom Harvey, Starfax, Inc., 654 Hawthorne St., Glendale, CA 91204. (818) 244-3600. 11-87-11

CHIEF ENGINEER needed for Miami Christian UHF Station. Strong on transmitters. Contact Ben Miller, Vice President, Engineering, Trinity Broadcasting Network, 714-665-2145. EOE. 11-87-41

HELP WANTED (CONT.)

RADIO ENGINEERING MAINTENANCE SUPERVISOR FOR RAPIDLY EXPANDING Christian Science Monitor international broadcasting operation. Will supervise staff, maintain equipment and inventory; participate in design, purchase and installation of new equipment. Requires degree in Electrical Engineering or equivalent level of work experience. Must be motivated to get things done by building a quality maintenance team. Send resume to Maria Parrott, Christian Science Publishing Society P-818, One Norway St., Boston, MA 02115. 11-87-11

TELEVISION MAINTENANCE ENGINEER to participate in the international growth of The Christian Science Monitor television operation. Will ensure efficient, quality production readiness with emphasis on audio systems and equipment; offer maintenance, installation and technical operations support; maintain inventory; and recommend purchase of new equipment. Must have 2-year technical degree and 3-4 years experience. Send resume to Maria Parrott, Christian Science Publishing Society P-818, One Norway St., Boston, MA 02115. 11-87-11

WORLD WRESTLING FEDERATION needs for its soon to be completed major post production/syndication facility in Stamford, CT.

MAINT. ENG. — Must be fully familiar with Grass Valley 300-Switcher, Sony 1" VTR, studio cameras. Must have design capability and be able to grow with the facility.

SR. V.T. EDITOR — At least 5 years experience in creative editing of weekly syndicated programming.

Send resume & salary requirements to:

Director of Personnel
Titan Sports, Inc.
P.O. Box 3857
Stamford, CT 06905

RADIO FREQUENCY SYSTEMS ENGINEER. Will ensure optimum performance of transmission, reception and distribution of rapidly growing Christian Science Monitor international radio network systems. Includes uplinks/downlinks; RF; CATV; microwave; and fiber optics. Will perform system design and documentation; install and maintain equipment. Must have 2-year technical degree in radio frequency or microwave technology, or equivalent work experience, plus 2-3 years applied experience. 1st Class FCC lic. preferred. Send resume to: Maria Parrott, Christian Science Publishing Society P-818, One Norway St., Boston, MA 02115. 11-87-11

CHIEF ENGINEER for 5000 watt directional AM and 100KW FM. Must have experience. Send resume to: Paulette Lundberg, KWMT, Box 578, Fort Dodge, Iowa 50501. 11-87-11

VIDEO MAINTENANCE ENGINEER: Image Transform is seeking an experienced telecine engineer for the evening shift. A working knowledge of the RANK Mk3 telecine is required, as well as experience in the maintenance of high speed digital post production equipment. The position involves construction of in-house custom video processing equipment, as well as responsibility for routine day to day maintenance. The ability to work with an advanced, self motivated engineering team is essential. Call or send resume to Image Transform, Inc., 4142 Lankershim Blvd., North Hollywood, CA 91602, Attn: Vice President/Engineering. 818/985-7566. 11-87-11

CHIEF ENGINEER: Major Florida 100 KW FM is seeking a top notch Chief Engineer with a strong desire to be a key member of a high energy Rock & Roll station with the best equipment and sound in town. Minimum 3 years hands-on broadcast experience with an emphasis state-of-the-art audio. SBE certification a plus. Please send resume and cover letter to: Broadcast Engineering, P.O. Box 12901, Dept. 687, Overland Park, Kansas 66212. 11-87-11

	Page Number	Reader Service Number	Advertiser Hotline		Page Number	Reader Service Number	Advertiser Hotline
Abekas Video Systems	11	8	415/571-1711	Leader Instruments Corp.	59	204,205	800/645-5104
ADM Technology, Inc.	IFC	1	313/524-2100	Leister, Karl-Electro-			
Adrienne Electronics Corp.	126	60	800/782-2321	Gerätebau	147	212	707/462-9795
AEG Corp. Aktiengesellschaft	67	43	416/683-8200	Leitch Video of America	63	40	804/424-7290
Alpha Audio	148	119	804/358-3852	Lenco Electronics	81	54	314/243-3147
Amber Electro Design Inc.	85	31	514/735-4105	MCG Electronics	148	120	516/586-5125
Ampere Corp. (Klystron Div.)	65	42	401/762-3800	Magni Systems, Inc.	27	210	503/626-8400
Ampex Corp. (AVSD)	49		415/367-2911	Marker Technologies of America	150	213	800/522-2025
Ampex Corp. (AVSD)	50-51		415/367-2911	MCL, Inc.	115	85	312/759-9500
Ampex Corp. (MTD)	37	22	415/367-2911	McCurdy Radio Industries	118	74	416/751-6262
Arrakis Systems, Inc.	21	13	303/224-2248	Microdyne Corp.	131	103	904/687-4633
Audio Precision	117	88	800/231-7350	Midwest Communications Corp.	1	3	800/543-1584
Audio Technologies Inc.	52	28	215/443-0330	Mikrolab	124	94	213/306-0120
Audio-Technica U.S., Inc.	138-139	112	215/443-0330	Monroe Electronics, Inc.	125	95	312/358-3330
Audio-Video Engineering Co.	116	97	516/546-4239	NEC Corp.	145	116	800/323-6656
Auditronics, Inc.	93	69	901/362-1350	NEC Corp.	55	63	800/323-6626
Belar Electronics Laboratory Inc.	125	96	215/687-7550	Nemal Electronics Inc.	133	106	305/893-3924
Benchmark Media Systems	140	113	315/452-0400	Neve, Inc.	143	115	203/744-6230
Broadcast Video Systems Ltd.	135	110	416/764-1584	New England Digital	69	44	212/977-4510
BTS Broadcast Television Systems	61	38	801/972-8000	Odetics, Inc.	15	10	800/243-2001
Camera Mart, Inc.	86	37	212/757-6977	Opamp Labs Inc.	126	58	213/934-3566
Canon USA Inc., Broadcast Lens	137	111	818/840-0993	Orban Associates Inc.	17	11	800/227-4498
Canon USA Inc., Broadcast Lens	83	56	818/840-0993	Orban Associates Inc.	7	6	800/227-4498
Centro Corp.	47	27	619/560-1578	Otari Corp.	150	215	415/592-8311
Centro Corp.	45	25	619/560-1578	Panasonic Broadcast Systems Co.	108-109	79	201/348-7336
Cetec Vega	86	62	818/442-0782	Panasonic Industrial Div.	76-77	51	201/348-7620
Cipher Digital, Inc.	46	26	301/695-0200	Panasonic Industrial Div.	75	50	201/348-7620
Circuit Research Labs, Inc.	13	9	800/535-7648	Panasonic Industrial Div.	56-57	32	201/348-7620
Clear-Com Intercom Systems	124	93	415/861-6666	Polaroid Corp.	99	73	800/225-1618
Comark	5	5	215/822-0777	QEI	146	117	800/334-9154
Continental Electronics, Div. of Varian	36	21	214/381-7161	Rank Cintel	IBC	2	312/297-7720
Datatek, Inc.	53	29	201/654-8100	RE Instruments	114	84	216/871-7617
Datum Inc.	66	102	714/533-6333	Richardson Electronics Ltd.	31	17	800/323-1770
dbx	73	48	800/525-7000	ROH	58	34	800/262-4671
Dictaphone Corp.	62	39	800/431-1708	RTS Systems, Inc.	92	68	818/843-7022
Digital Video Systems Div.	82	46	416/299-6888	Selco Products Co.	133	107	800/257-3526
DKW Systems Inc.	116	87	403/426-1551	Shure Brothers Inc.	98	72	312/866-2553
EEV, Inc.	95	70	914/592-6050	Shure Brothers Inc.	100	89	312/866-2553
Eastman Kodak Co.	60	36	212/930-7500	Siemens-Neve	143	115	203/744-6230
Eastman Kodak Co.	58	33	212/930-7500	Sierra Video Systems	146	211	916/273-9331
Eastman Kodak Co.	35	20	212/930-7500	Sitler's Inc.	150	217	800/426-3938
Engineering Lab, Inc.	135	109	619/758-7743	Skotel Corp.	132	104	514/465-8990
ESE	147	118	914/592-6050	Sony Corp. of America (AV Pro Video)	90-91	67	800/662-SONY
Express Tower Co.	110	80	918/479-6484	Sony Corp. of America (Broadcast)	120-121	91	800/662-SONY
Fujinon Inc.	127	99	914/472-9800	Sony Corp. of America (Broadcast)	28-29	16	800/662-SONY
Gentner	64	41	801/268-1117	Sound Technology	102-103	76	408/378-6540
Graham-Patten Systems Inc.	123	92	800/547-2489	Standard Tape Laboratory, Inc.	126	59	415/786-3546
Grass Valley Group, Inc.	9	7	916/273-8421	Stanton Magnetics	34	19	212/445-0063
Grass Valley Group, Inc.	141	200,202	916/273-8421	Studer Revox America Inc.	130	64	615/254-5651
Grass Valley Group, Inc.	141	203,204	916/273-8421	Surcom Associates Inc.	82	47	619/722-6162
Grass Valley Group, Inc.	105	77	916/273-8421	Tamron Industries, Inc.	79	53	516/883-8800
Gray Engineering Laboratories	126	57	912/883-2121	TASCAM Div. TEAC Corp. of America	43	24	213/726-0303
H.M. Dyer Electronics, Inc.	132	105	313/349-7910	Television Technology Corp.	119	90	303/465-4141
Harris Corp. (Florida)	112-113	82	800/442-7747	Tentel	150	216	800/538-6894
Hitachi Denshi America Ltd.	3	4	800/645-7510	Thermodyne International Ltd.	134	108	213/603-1976
HM Electronics	89	66	619/578-8300	Thomson -CSF/DTE	107	78	
Hotronic, Inc.	84	49	408/292-1176	Total Spectrum Manufacturing, Inc.	78	52	914/358-8820
Howe Technology Corp.	111	81	800/525-7520	Trimm Inc.	80	61	312/362-3700
Ikegami Electronics Inc.	128-129	100	201/368-9171	Utah Scientific Inc.	39		800/453-8782
Intergroup Video Systems, Inc.	101	75	800/874-7590	Utah Scientific Inc.	40-41	23	800/453-8782
JamPro Antennas Inc.	54	30	916/383-1177	Varian	33	18	415/592-1221
Jem-Fab Group Inc.	150	218	516/867-8510	Videotek, Inc.	66	101	602/997-7523
Jensen Transformers Inc.	150	214	213/876-0059	Ward-Beck Systems Ltd.	BC		416/438-6550
JVC Company of America	19	12	800/582-5825	White Co., Inc.	147	212	707/462-9795
JVC Company of America	70-71	45	800/582-5825	Winsted Corp.	114	83	800/328-2962
JVC Company of America	24-25	14	800/582-5825	Yamaha International Corp.	96-97	71	

the World's First
4:2:2 Telecine



The no hassle broadcast telecine

ADS 1 Advanced Digital Scanner

With ADS 1, Rank Cintel has applied its unique film-scanning experience to the specific needs of the broadcaster.

Developed in close co-operation with the British Broadcasting Corporation (BBC), this CCD multiplexed broadcast-telecine is designed for easy 'on-air' operation and transfer of film to tape prior to transmission.

The incorporation of solid-state imaging technology is an example of Cintel's continuing development philosophy.

Latest component technology, cost-conscious design and modern manufacturing techniques have been

exploited, without compromising performance and reliability. The result is a telecine system which is technically advanced while at the same time being economical to operate. That is not all, ADS 1 also features a unique electronic dirt and scratch concealment system. Add all this together and you have the ideal broadcast-telecine package.

**Take the hassle out of film
broadcasting — call us at
268-8911-2-3 (914)**



Rank Cintel Inc. Head Office U.S.A.
P.O. Box 710,
704 Executive Blvd.,
Valley Cottage,
New York,
10989-9998, U.S.A.
Tel: 268-8911-2-3 (914)
Fax: 268-5939 (914)



Rank Cintel Inc.

Circle (2) on Reply Card

West Coast Sales and Service
13340 Saticoy Street,
North Hollywood,
California 91605, U.S.A.
Tel: 765 7265 (818)
Telex: 182694 RPI LSA
Fax: 765 3315 (818)

Ward-Beck's Ubiquitous ST!

No matter what size the market - Chicago to Shreveport, New York to Seoul, Vancouver to Greenville - the versatility of Ward-Beck's ST Stereo Console is unsurpassed.

Flexible 24, 36 or 48 channel configurations can meet every need and fit every budget.

Available features... • 4-BAND EQ • INTEGRAL ROUTING SWITCHER • CENTRAL MICROPROCESSOR CONTROLLER • PROGRAMMING KEYBOARD • ALPHA-NUMERIC DISPLAYS • PEAK MONITOR/ANNUNCIATOR • AUDIO-FOLLOW-VIDEO INTERFACE.

Talk to us! Discover how affordable Super-Quality can be!



First by Design



Ward-Beck Systems Ltd., 841 Progress Ave., Scarborough, Ontario, Canada M1H 2N4 Tel: 416/438-6550 Tlx: 065-25399