

BROADCAST[®] engineering

April 1987/\$3

Automation in broadcasting special report

ac line
protection
methods
p. 88

- **DESIGNED TO PERFORM**
- **BUILT TO LAST**
- **PRICED TO SELL**

THE ADM RM1083 COMPACT AUDIO MIXER

The ADM RM1083 is a self-contained, rack-mountable mixer designed for both mobile and fixed installations. It offers the most needed audio console features not generally found in a portable audio mixer, such as eight inputs that are switchable between microphone and line source, transformer coupling, phase reversal, 30 db of gain adjustment and a high pass filter. A three band equalizer with carefully chosen frequencies optimizes your audio performance for either a mobile or fixed application.

Designed with stereo in mind, the RM1083 provides panning on each input with in/out switching, a line up oscillator bus assignment, eight direct outputs, transformer coupled main and auxiliary outputs and a host of other features make the RM1038 the most versatile rack-mounted mixer available today.

Built with traditional ADM quality, the RM1083 will handle the roughest mobile or fixed use and still deliver the top performance the commercial broadcaster has learned to expect from ADM. The RM1083 is backed by our exclusive five year warranty, as are all ADM products.




Contact ADM, your regional manager or audio distributor.



ADM Technology, Inc.
1626 E. Big Beaver Road, Troy, Michigan 48084
Phone: (313) 524-2100 TLX 23-1114
Circle (1) on Reply Card

Cross-Country Communication

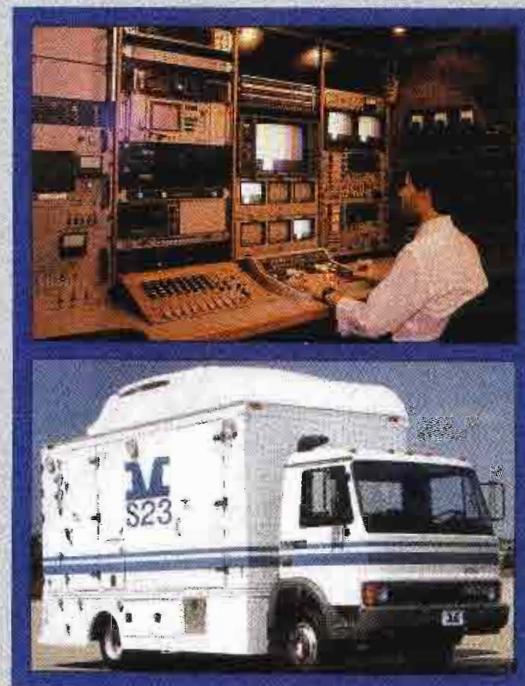

With the antenna
that works!

In Brownsville,
In Seattle,
In Miami,

Everywhere!

Midwest combines its mobile production unit experience with the latest antenna technology to bring you the S-23, a satellite news vehicle that enables you to uplink a story from virtually anywhere.

The S-23 incorporates a Vertex 2.6M antenna with 50db gain into a unit that is spacious enough for full production capability, yet has excellent weight distribution and a wide GVW safety margin.

An integral deployment and positioning system ensures antenna

accuracy, even in heavy weather. You can choose from a variety of equipment configurations and several domestic and foreign chassis models.

Call for specifications and antenna patterns on the S-23, S-18, S-1 Fly-away or any of our mobile satellite news systems.

The Midwest S-23. The mobile satellite news system that works. Everywhere.

2.6M Vertex Antenna

- >50db Gain at 14.25 GHz
- >35db Cross Polar Isolation
- Meets 29-25_{log} FCC 2° Spacing Curves



MIDWEST
Communications Corp.

One Sperti Drive
Edgewood, KY 41017
606-331-8990

Circle (3) on Reply Card

Contents

April 1987 • Volume 29 • Number 4



Page 26

BROADCAST engineering

AUTOMATION IN BROADCASTING:

Computers are changing the day-to-day operation of radio and TV stations across the country. Advancements in technology and reductions in cost have brought the power of the computer to virtually every area of a broadcast facility. This month we examine the computerization of broadcasting in four detailed reports.

26 Planning for TV Automation

By Don Edvalson, BTS, Salt Lake City
Management wants it, engineering must live with it. Successful automation is a detail-oriented science.

44 Serial Data Control Systems

By Waldemar S. Wisniewski, HEDCO, Grass Valley, CA
A guide to popular serial data communication formats for remote-control applications. Related articles examine:

- **Comparing Standards** (page 48)
- **Remote Control with the ESBUS**

By Douglas A. Hurrell, Alamar Electronics, Campbell, CA (page 74)


76 Planning for Engineering Automation

By Joseph P. Geerling, KWMU-FM, St. Louis
An electronic assistant may be the key to operating an engineering department efficiently.


88 Computer Power Protection

By Mark Hill, ITC/3M, Bloomington, IL
Don't let your computer-driven broadcast equipment suffer damage from power-line disturbances. A related article focuses on:

- **UPS vs. Standby** (page 94)

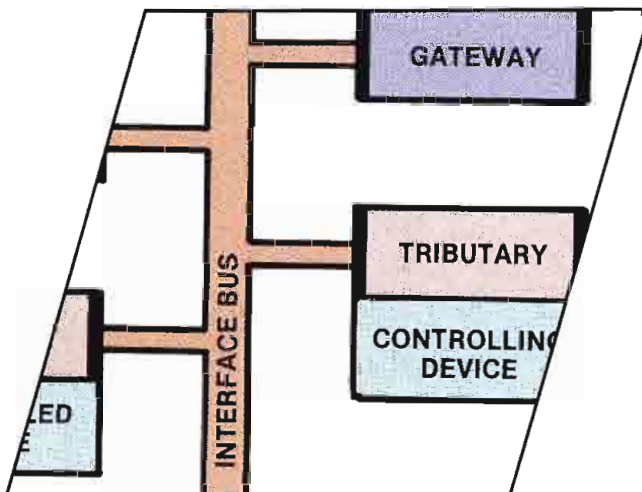

Page 44

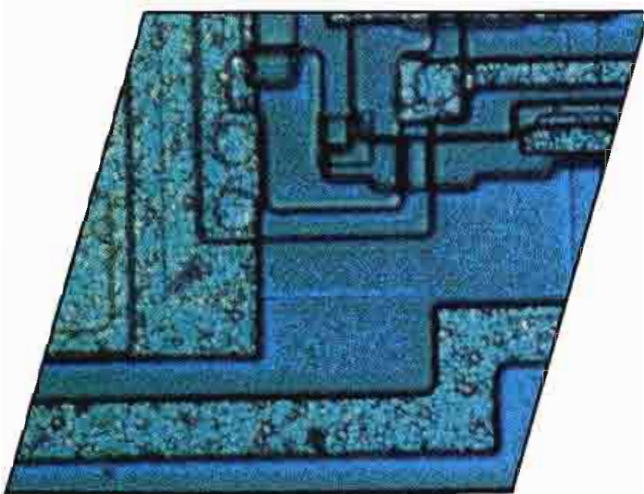

Page 88

ON THE COVER

The primary benefit of automation is easy and efficient interchange of information. The floppy disk has, more than any other single medium, provided the means for moving data from one computer to another. Our cover this month illustrates the advancing pace of computerization in broadcasting. (Photo courtesy of DuPont Company, Wilmington, DE.)

DEPARTMENTS

4	News	20	Management for Engineers
6	Editorial	98	Field Report: Media Touch 2005
8	FCC Update	106	Applied Technology: Utah Scientific Dynabus
10	Strictly TV	114	Station-to-Station
12	re: Radio	116	SBE Update
14	Satellite Technology	118	People
16	Circuits	122	Business
18	Troubleshooting	126	New Products

AL never met a tape he didn't like.



AL'S is an Automated Library System where all tapes are welcome. Beta, Beta SP, M, M2, U-matic or Digital 19mm formats -- you name it. AL'S can handle it. And in numbers enough to make even a station manager smile. 500, 1000, 1500. How big is your library? AL'S can handle it.


You want to mix formats? AL mixes it up with the best of them. Any combination of tape formats is a piece of cake for AL. Full length programming or commercials -- you mix them up any way you want to. AL'S never been one to play favorites. AL'S will even play news tapes quickly along with all your others.*

AL is top drawer, high tech digital technology -- but he's no snob. Plain and simple, out of the box, stock VTRs suit AL just fine. Why take a chance on prima donna machinery?

Why take a chance, period? Your tape library couldn't be in hands more capable than AL's.

For more information -- or, for an audience with AL himself, call us at: (617) 244-6881. *Optional

**Automated
Library
System**
LaKart Division
287 Grove Street
Newton, MA 02116

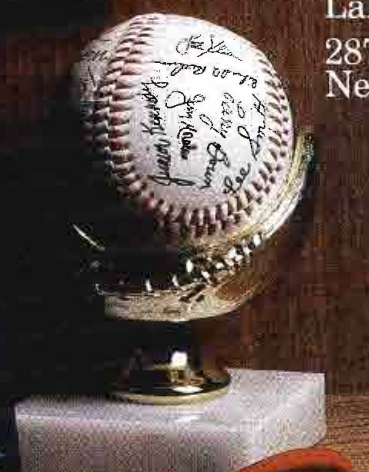

LAKE
The Systems Company

Circle (4) on Reply Card

www.americanradiohistory.com

SBE group views Klystrode transmitter

A history-making event took place at Comark, Southwick, MA, on Feb. 12. The first public demonstration of an operating Klystrode TV transmitter was performed for the benefit of members from the Connecticut Valley SBE Chapter 14. This marked the first time an operating Klystrode was viewed and examined by members of the broadcast industry.

The transmitter model, CTT-U-60SK, was operating at more than 60kW peak output power while meeting all broadcast linearity requirements.

The advantage of the Klystrode over the klystron tube is its Class B mode of operation. This mode automatically modulates the beam power required by the tube as a function of RF drive. The 60kW Klystrode final amplifier operated during the demonstration required only 52kW of beam power to deliver 60kW peak RF output at 50% APL.

There were more than 30 attendees at the first public Klystrode demonstration including non-SBE members.

Comark held operating demonstrations of the transmitter at the NAB show.

ABC Radio tests data system

ABC Radio Network has begun testing a digital, satellite-delivered data system. It is the first major radio network to use a high-speed, digital data delivery system for its affiliates.

Instantaneous data communications to affiliates will permit easier access to the audio services delivered across the network's 19 15kHz audio channels. The network also will be able to develop new products using data that will help affiliates to program their stations.

The system will be able to address each affiliate individually and also will be able to feed information simultaneously to the line-up.

The test of the satellite-delivered data service began in February with affiliate WABC in New York. The system will be fully tested by late spring and implementation with affiliates will begin in the second half of 1987.

SMPTE issues call for papers

A call for papers for the program of the 129th technical conference and equipment exhibit of the Society of Motion Picture and Television Engineers has been issued.

The conference and exhibit will be held Oct. 30 to Nov. 4, at the convention center in Los Angeles.

Papers are being sought on the subjects of motion-picture and TV technology for presentation at the conference. Those interested in presenting a paper should send their name, address, title of proposed paper and a 100-word abstract

Continued on page 120

BROADCAST engineering

EDITORIAL

Jerry Whitaker, *Editorial Director*
Brad Dick, *Radio Technical Editor*
Ned Soseman, *TV Technical Editor*
Carl Bentz, *Special Projects Editor*
Paula Janicke, *Associate Editor*
Dawn Hightower, *Associate Editor*
Dan Torchia, *Group Managing Editor*
Alisa Carter, *Editorial Assistant*
Ramona Vassar, *Group Editorial Assistant*
Pat Blanton, *Directory Editor*

ART

Kristi Sherman, *Graphic Designer*

EDITORIAL CONSULTANTS

Fred Ampe, *Audio*
Nils Conrad Persson, *Electronics*
Tom Cook, *Video*
Mel Lambert, *Professional Audio*

BUSINESS

Cameron Bishop, *Group Vice President*
Duane N. Hefner, *Publisher*
Stephanie Fagan, *Promotions Manager*
Cynthia Sedler, *Promotions Coordinator*
Dee Unger, *Advertising Supervisor*
Mary Birnbaum, *Advertising Coordinator*

ADMINISTRATION

R. J. Hancock, *President*
Doug Riemer, *Circulation Director*
JoAnn DeSmet, *Circulation Manager*
Dee Manies, *Reader Correspondent*
Kevin Callahan, *Art Director*

Editorial and advertising correspondence should be addressed to: P.O. Box 12901, Overland Park, KS 66212-9981 (a suburb of Kansas City, MO) (913) 888-4664. Telex: 42-4156 Intertec OLPK. Circulation correspondence should be sent to the above address, under P.O. Box 12937.

TECHNICAL CONSULTANTS

Eric Neil Angevine, *Broadcast Acoustics*
John H. Battison, *Antennas/Radiation*
Blair Benson, *TV Technology*
Dennis Ciapura, *Radio Technology*
Dane E. Erickson, *Systems Design*
Howard T. Head, *European Correspondent*
Wallace Johnson, *FCC/Bdct. Engineering*
John Kean, *Subcarrier Technology*
Donald L. Markley, *Transmission Facilities*
Harry C. Martin, *Legal*
Robert J. Nissen, *Studio/Communications*
Hugh R. Paul, *International Engineering*
Art Schneider, *A.C.E., Post-production*
Elmer Smalling III, *Cable/Satellite Systems*
Vincent Wasilewski, *Communications Law*

MEMBER ORGANIZATIONS

Acoustical Society of America
Society of Broadcast Engineers

Member,
Association of Business Publishers
Member,
Business Publications
Audit of Circulation



SUBSCRIPTIONS: BROADCAST ENGINEERING is mailed free to qualified persons within the United States and Canada in occupations described above. Non-qualified persons may subscribe at the following rates: United States and Canada: one year, \$25.00. Qualified and non-qualified persons in all other countries: one year, \$30.00 (surface mail); \$108.00 (air mail). Back issue rates, \$5, except for the Buyers' Guide/Spec Book, which is \$20. Rates include postage. Adjustments necessitated by subscription termination at single copy rate. Allow 6-8 weeks for new subscriptions or for change of address. Second class postage paid at Shawnee Mission, KS.

BROADCAST ENGINEERING Volume 29, No. 4 (USPS 338-130) is published monthly (except in the fall, when two issues are published) by Intertec Publishing Corporation, 9221 Quivira Road, P.O. Box 12901, Overland Park, KS 66212. Second Class Postage paid at Shawnee Mission, KS and additional mailing offices. POSTMASTER: Send address changes to BROADCAST ENGINEERING, P.O. Box 12983, Overland Park, KS 66212.

Photocopy rights: Permission to photocopy for internal or personal use is granted by Intertec Publishing Corporation for libraries and others registered with Copyright Clearance Center (CCC), provided the base fee of \$2.00 per copy of article is paid directly to CCC, 21 Congress St., Salem, MA 01970. Special requests should be addressed to Cameron Bishop, group vice president. ISSN 0007-1794 \$2.00 + \$0.00.

©1987. All rights reserved.

Advertising offices listed on page 135.

INTERTEC
PUBLISHING CORPORATION

Yamaha's newest musical instruments.

For years, Yamaha has been making musical instruments that allow performers to express what they feel. Our new line of MZ Series professional dynamic microphones continues this tradition.

The three-layer laminated beryllium film used in the diaphragms of the MZ102Be, MZ103Be and MZ105Be offers greater control over piston movement for heightened presence and accuracy throughout the entire frequency range.

Throughout the entire line, a superior acoustic damping system makes use of a mesh screen and photo-silkscreen technology. The benefits are extraordinary long-term stability and absolute uniformity. This uniformity can be especially important when matching pairs of mics for stereo.

A tight cardioid pattern provides excellent off-axis rejection for superior feedback suppression.

To reduce handling noise, all MZ mics have a unique three-point floating suspension system. And a special windscreen with three times the impact resistance of conventional types. So you know it can take a pounding.

We even use gold-plated audio connectors.

But when you listen to Yamaha MZ mics, you hear more than the result of advanced technology. You hear a one-hundred-year tradition of making music.

For complete information, write Yamaha International Corporation, Professional Audio Division, P.O. Box 6600, Buena Park, CA 90622.



YAMAHA®

Engineering Imagination

Circle (5) on Reply Card



Gold-plated Connectors

Three-point Suspension System

Acoustic Resistors

Protective Grill

Beryllium Diaphragm ("Be" models)

People make it work

Automation. From union meetings to coffee-shop talk, no single word sparks more emotion from broadcast engineers. As the cash value of broadcast property continues to climb at rates disproportionate to other segments of the economy, owners and managers have found themselves obligated to generate profits commensurate with the ever-increasing value of their property.

In this age of takeovers and buy-outs, raising profitability is a difficult challenge in the face of shrinking advertising revenues, increasing competition, accelerating equipment requirements and escalating expenses. The rapidly changing economic climate of local broadcasting compels station owners and managers to carefully evaluate, or re-evaluate, current automation technology, its ramifications and its effect on the bottom line.

The Manifest Destiny of local TV broadcasting is the optimized minimization of delivery overhead. More money must be budgeted toward the production and purchase of appealing programming that can successfully compete with the entertainment alternatives that are eroding the once captive local TV audience.

Typically, financial reviews seem to focus on one of the larger slices of the local broadcaster's budgetary pie: the on-going, non-revenue-producing operations payroll. Fortunately, the trend to increase profitability by reducing expensive professional staffing requirements comes at a time when many established TV stations are experiencing a peak of turnover.

For years, managers have looked to automation to provide the ticket to reducing the necessary technical skills required for routine station operations. Some have found success with automation. Others have attempted it only to abandon it. What's the mutual secret of those who've succeeded? Discipline.

One station's automation system is another station's sequencer. At one extreme are some who feel that a fully automated station must include controlling the HVAC system, the lock on the back door and the coffee pot. Then there are others that believe automation is necessary only for on-air playback assembly. Most managers' expectations fall somewhere in between. Today, there are many automation products on the market that can fulfill the range of management requirements. The question is, is management prepared to meet the requirements of the *system*?

The double-edged sword of automation, which promises improved profitability and a more consistent on-air look on one side, threatens management with serious problems on the other. These are not necessarily hardware or software problems, but *system* problems, and the system includes people.

Traditionally, a manual master control was relied upon by all departments as the filter for a multitude of seemingly minor discrepancies that could be identified and corrected before a mistake was actually aired. With automation, the computer doesn't watch the program; it only follows instructions. It is each department's responsibility to provide master control with accurate, verified information for computer entry and on-air execution.

The computer probably won't recognize competing products scheduled in the same break, mistimed segments, news bulletins or any of the other predictably unpredictable surprises that pepper the broadcast day. Poor split-second judgment by a master control operator can rob a station of revenue faster than you can say "production assistant" while leaving viewers and sponsors wondering, "What's the problem?"

The lifeblood of automation is well-organized implementation, meticulous discipline and result-oriented supervision. Each department must work with engineering operations to ensure that program segments, spots and IDs are in-house ahead of time, and timed accurately to the frame. Success depends upon the honesty of operator discrepancy reports, and management's commitment to follow up discrepancies without intimidation, ensuring that discrepancies do not recur.

The dream of eliminating skilled operators by automation is an illusion. Automation simply allows the redistribution of engineering talent within a station away from routine operating positions, and provides control for employee growth as demands on technical operators and engineers continue to grow.

!:-?~))))]

THE NEW OPTIMOD®-AM 9100B

Audio processing for AM improvement.



In the several years since its introduction, OPTIMOD-AM Model 9100A has become one of the most-often used tools for improving AM audio.

Now there is a new opportunity for AM improvement. Over a year ago, the National Radio Systems Committee brought broadcasters, equipment manufacturers, and receiver manufacturers together to talk about a voluntary national transmission standard that would make wideband high-fidelity AM radios practical.

Today, after hundreds of hours of discussion and study, the standard finally exists that will allow receiver manufacturers to increase and flatten their frequency response without risk of increased interference. But for them to do this, broadcasters must implement the standard: a "modified 75 μ s" pre-emphasis specification brightens up the sound on older radios while minimizing interference to adjacent stations, while a sharp-cutoff 10kHz low-pass filter specification protects the second adjacencies by limiting occupied bandwidth.

Receiver manufacturers have stated their willingness to replace their current AM receiver designs (with their telephone-quality fidelity) with AM receivers having full 10kHz frequency response—but *only* if and when the NRSC standard is fully adopted by broadcasters. For the NRSC standards to be successful, broadcasters must change over *quickly*. If the new high-fidelity receivers generate complaints of interference caused by stations not complying with the new standard, the receiver manufacturers will revert back to the present low fidelity 3kHz designs! *Everyone* will lose.

Orban was the first to propose and implement AM pre-emphasis and low-pass filtering, and we were heavily involved in the Committee work and research. We strongly endorse the new NRSC standard. It's good engineering *and* good business, and we are making it easy for all OPTIMOD-AM owners to comply.

Introducing the new Model 9100B:

It complies fully with the NRSC standard while retaining the features that have made OPTIMOD-AM Model 9100A the choice of so many stations concerned about competing with FM. The 9100B increases coverage, improves source-to-source consistency, and yields superb quality on both voice and music. And, the new standard allows us to make the new OPTIMOD-AM even louder!

Like its predecessor, the new 9100B can be configured to operate optimally in mono, C-QUAM® stereo, or Kahn stereo. Mono units can be field-upgraded to stereo by simply plugging in additional cards.

For owners of OPTIMOD-AM Models 9100A and the older 9000A:

We underscore our commitment to the new standard with low-cost Field Upgrade Kits to add the NRSC-standard pre-emphasis and filtering. They are available through your authorized Orban Broadcast Products Dealer.

To find out more about the NRSC standard, and about Orban's *new* 9100B OPTIMOD-AM, or the Upgrade Kits for the 9100A and 9000A, please call or write.

Why not copy this ad for others at your station who would like to know what's in store for AM radio.

Circle (6) on Reply Card

OPTIMOD is a registered trademark of Orban Associates Inc.
C-QUAM® is a registered trademark of Motorola, Inc.

www.americanradiohistory.com

FCC examines call letter restrictions

By Harry C. Martin



The FCC is proposing the elimination of most of its long-standing restrictions with respect to the assignment and use of call letters by broadcast stations. The proposed changes are as follows:

- **K and W assignments.** The commission is proposing to eliminate the current requirement that call signs beginning with the letter K be assigned only to broadcast stations located west of the Mississippi River and those with the letter W be assigned only to stations east of the Mississippi. These restrictions would be eliminated in all broadcast services, including LPTV.

- **Conforming call letters.** Under current rules, only commonly controlled stations in different broadcast services (AM and FM) can be assigned identical basic call letters. The commission is proposing to permit any licensee to request any call letters not assigned to another station in its own service, except within the same market.

- **Procedures upon changes of ownership.** Under current rules, a licensee seeking a new call sign must request a call letter change and, at the same time, relinquish its existing call sign. A relinquished call sign is not available for use by any other licensee until the effective date of the call letter change. It is then assigned to the first applicant who requests it. The commission is proposing to amend its rules to permit an exception to this first-come-first-served policy in instances where an existing broadcaster wishes to transfer a long-standing call sign to a new facility in the market. There will be no change in the commission's policy allowing call sign swaps between commonly owned stations licensed to the same city.

New rules for booster stations

The commission is proposing to allow increases in the output power of on-channel FM booster stations and to eliminate the restriction that such stations rebroadcast only signals received

over the air. The commission also is proposing the establishment of a TV broadcast booster station service. The specifics are:

- **FM boosters.** Currently FM booster stations are limited to 10W of power. Under the proposal, operating power at higher levels would be permitted as long as the 1mV/m service contour of the primary FM station is not expanded or interference to other stations is caused. Co-channel stations would be protected by subjecting boosters to a requirement that the signal of any co-channel station must exceed the signal of the booster by 20dB at all points within the 1mV/m predicted contour of the co-channel station.

The commission also proposed eliminating the restriction that FM boosters broadcast only over-the-air signals. This would allow FM licensees to feed signals to boosters by whatever technical means they wish, and to use aural broadcast auxiliary facilities for this purpose.

- **Establishment of TV boosters.** The commission also proposed establishing a new broadcast booster service that would provide the service equivalent to FM boosters. Under the proposed rules, the licensee of a full-service TV station would be authorized to operate on-channel booster stations to simultaneously retransmit the primary station's signal to areas within its predicted Grade B contour that are not receiving Grade B quality signals directly over the air.

The operating power and location of such boosters would be limited only to the extent that they not provide Grade B or higher level service beyond the predicted Grade B contour of the primary TV station or increase interference to other TV stations. Initially, the commission would authorize these boosters only at low power levels, as is the case for TV translators and LPTVs.

Because the proposed booster service essentially would represent a technical expansion of the TV station being rebroadcast, it would limit ownership of TV boosters to the licensees of stations being rebroadcast and exempt such licensees from the competitive applications process.

LPTV and TV translator rules amended

In rule changes affecting the LPTV and TV translator services, the commission has imposed a limit of five applications per filing window on a single applicant or entity having a 1% or greater interest in an application filed during the window period. There will be no cap on major change applications filed by authorized stations during a specified window period. This rule change is designed to discourage the mass filings of speculative applications that have clogged LPTV processing for the past several years.

The commission also has changed its rules to permit the licensee or permittee of an LPTV or TV translator station displaced by a new full-powered station or by a land mobile operator, to specify operation on a different output channel without competition. To make the switch, the displaced station must show that there are no pending applications on the new channel and that its operations would not interfere with any other pending applications or protected primary services. The commission has adopted the same displacement standards for LPTV and TV translator stations forced to change channels due to cable headend or output converter interference.

It is expected that a nationwide filing window, on all channels, will be opened as soon as the commission can modify its application forms so they give sufficient information to ensure compliance with the 5-application cap.



Filing fees imposed

Effective April 1, the commission began collecting filing fees for nearly all broadcast applications.

Fees for applications for new TV, AM and FM stations are \$2,250, \$2,000 and \$1,800, respectively. The fee for filing a minor change application for a radio or TV station is \$500. Fees for filing applications for the assignment or transfer of AM, FM or TV stations are \$500 per station. The filing fee for pro forma assignments and transfers is \$70. A complete list of Mass Media Bureau fees was published in BE's June 1986 issue.

1-7-88

Martin is a partner with the legal firm of Reddy, Begley & Martin, Washington, DC.

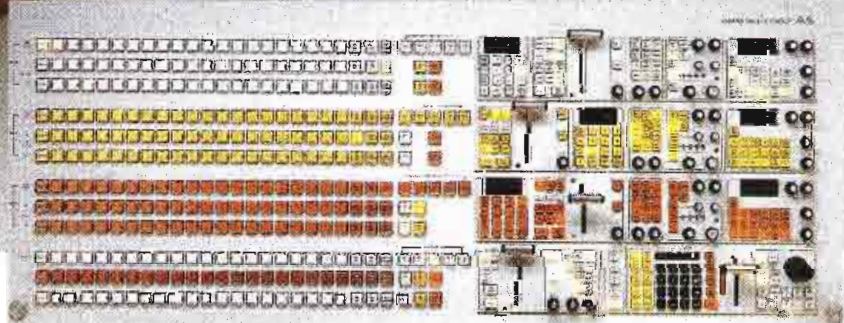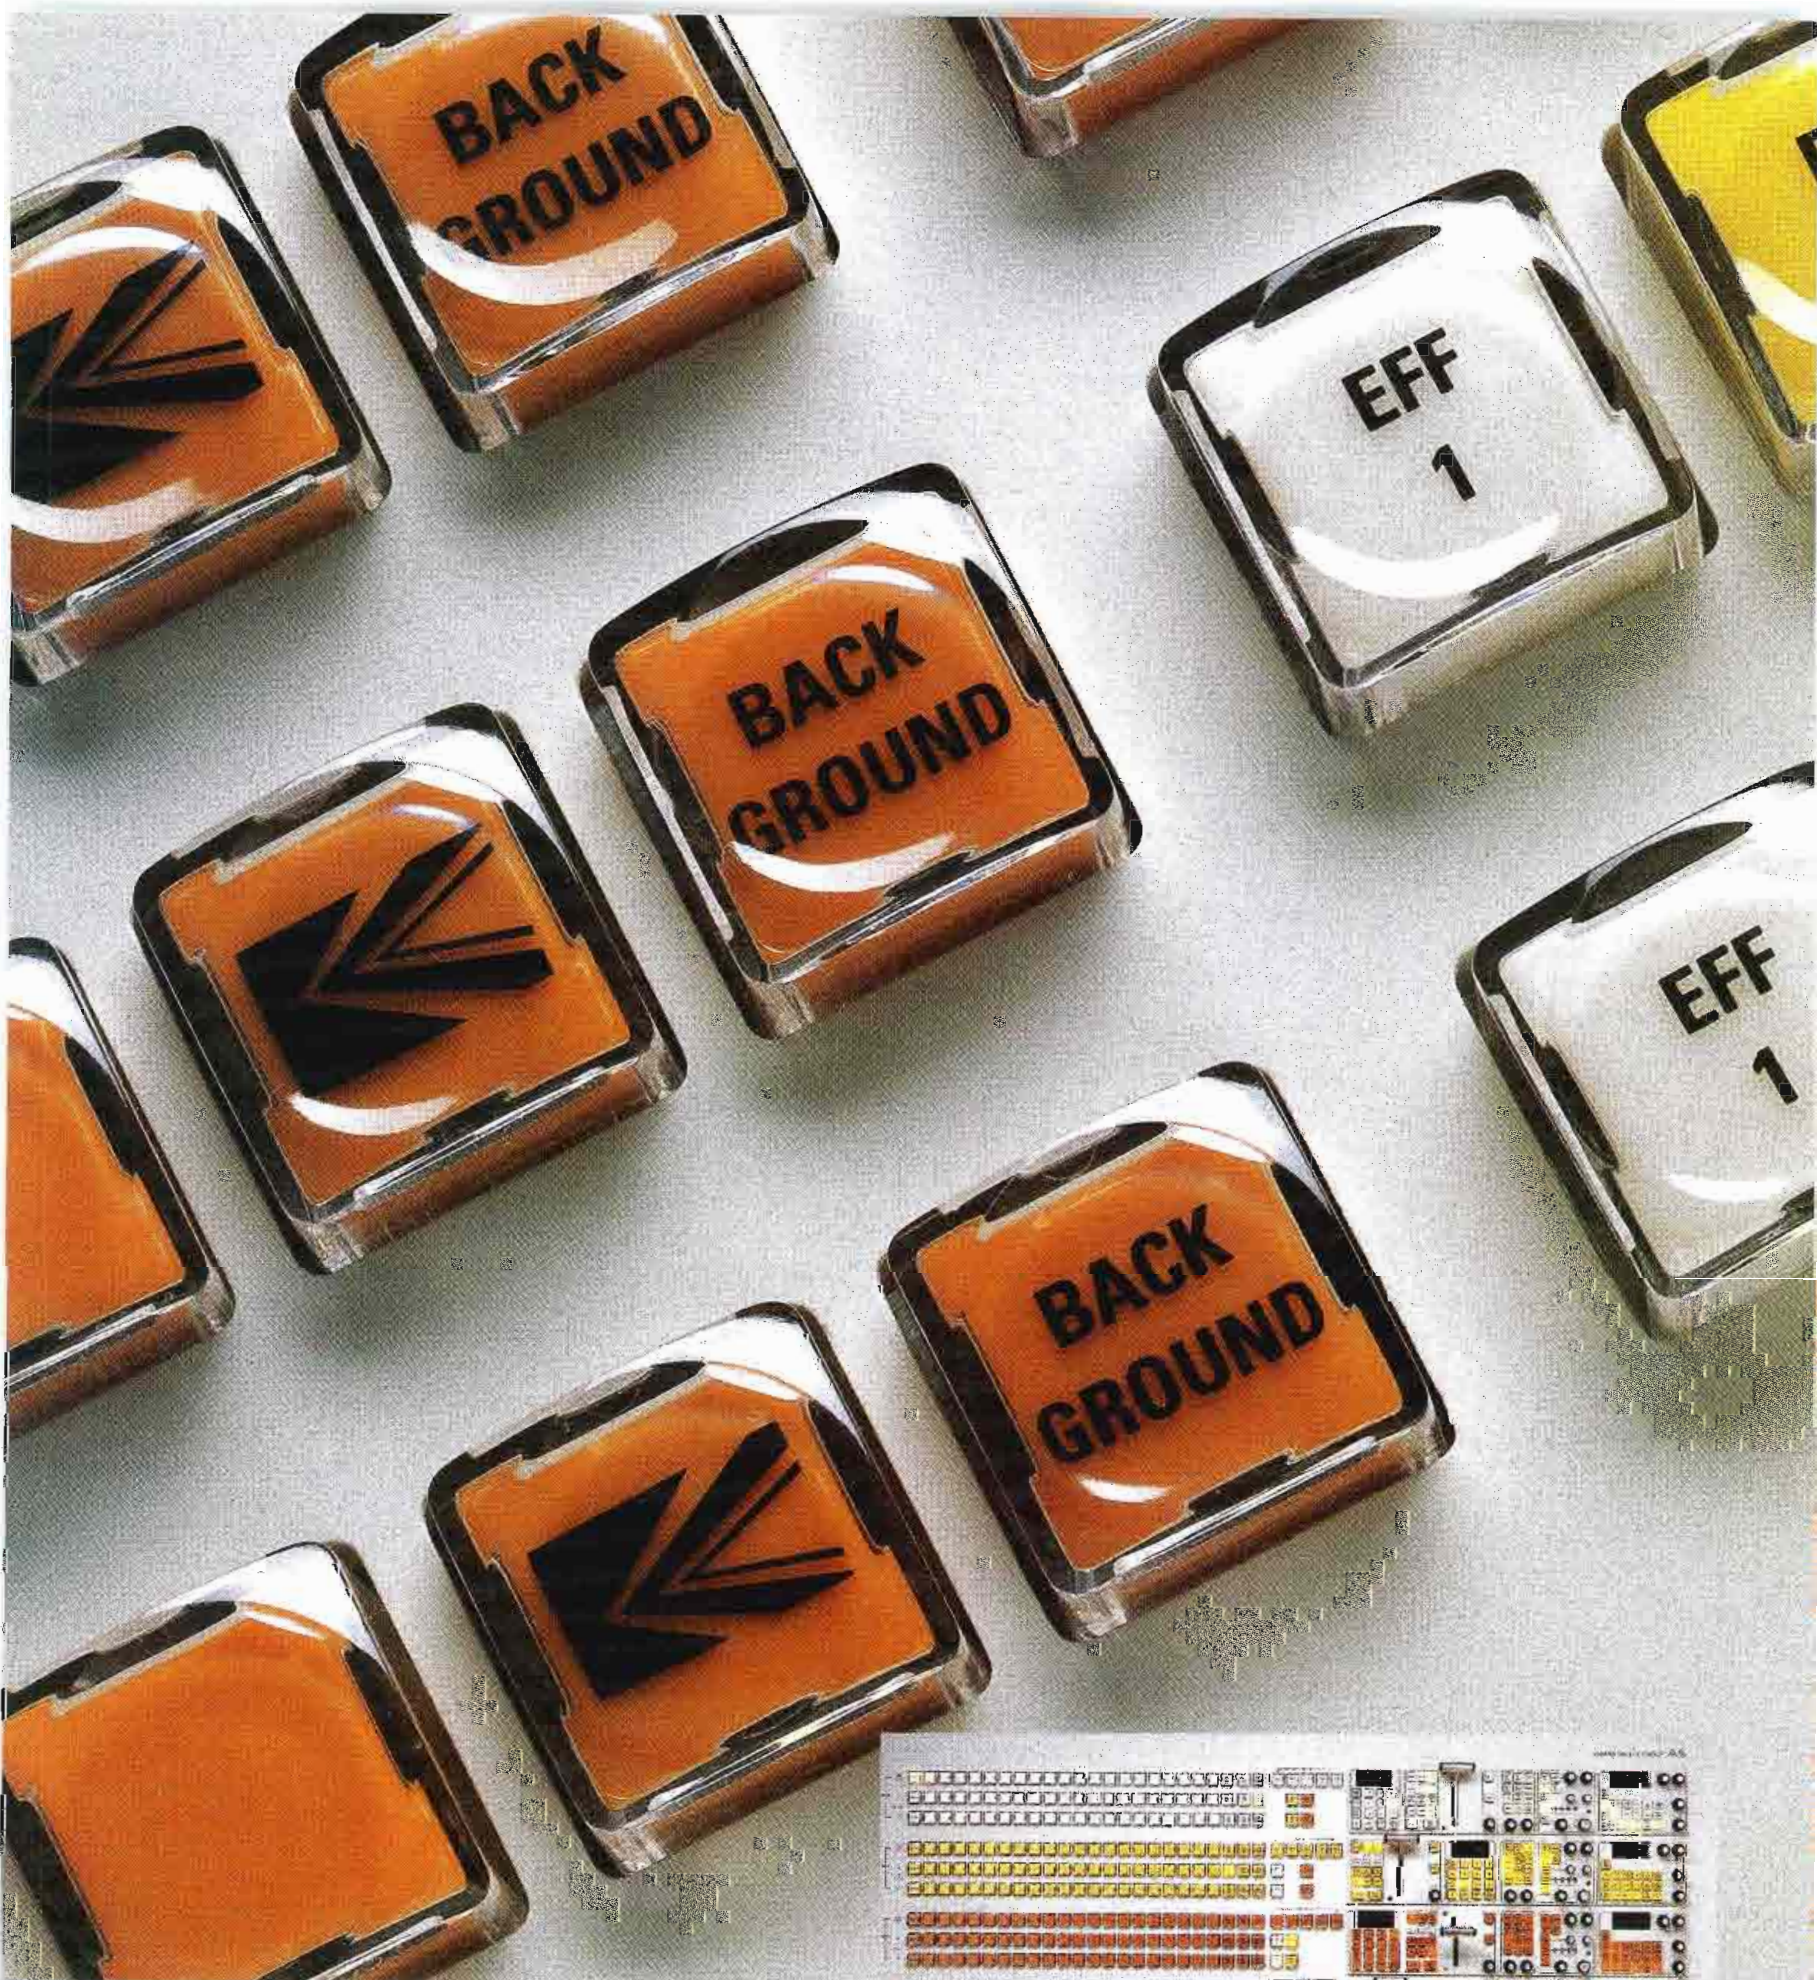

**AN INVESTMENT IN THE MODEL 300
IS AN INVESTMENT IN THE FUTURE.**

We're constantly working to make the world's best production switcher even better, with an ongoing program of enhancements.

When we add new features to the 300, we make those same features available to every owner with convenient field updates.

The Model 300. The best, and built to stay that way.

Grass Valley Group®

STRENGTH YOU CAN RELY ON

THE GRASS VALLEY GROUP, INC.® — P.O. Box 1114 — Grass Valley, CA 95945 USA — Telephone (916) 273-8421 — TRT: 160432 OFFICES: New York (201) 845-7988; District of Columbia (301) 622-6313; Atlanta (404) 493-1255; Chicago (219) 264-0931; Minneapolis (612) 483-2594; Dallas/Fort Worth (817) 483-7447; Los Angeles (818) 999-2303; San Francisco (415) 968-6680. A TEKTRONIX COMPANY

Circle (7) on Reply Card

www.americanradiohistory.com

In answer to that....

By Carl Bentz, special projects editor



Broadband communications systems, such as CATV and CCTV, have definite advantages compared with broadcast television for interactive audience response measurements. Conceivably, the cable that connects every viewer's television to a central location can carry signals in both directions. CATV subscribers should be able to respond electronically from their living rooms.

Two-way communications on CATV systems have been under way for at least 15 years. Some early experiments in home-bound education, shopping services and the early morning coffee klatsch were remarkable, albeit sometimes flawed, when the Voice of America leaked into the cable.

In a wired medium, two different RF signals can be directed to their own amplifiers through bandpass filtering and frequency separation. CATV uses forward signals of standard channels 2-3, 5-6 and 7-13. Those systems with a full schedule of satellite programs also use midband (between 6 and 7), superband (above 13) and some sub-band (below 2) channels. However, there is still a good deal of spectrum below 50MHz for numerous narrowband, non-video reverse carriers.

In some locations, cable systems, now with better signal security through improved coaxial cable and connectors, are aiding cities in controlling automotive traffic flow. A stream of digital information moves between terminals at each traffic light and a central controller computer. Such digital signaling is used by the cable company, linking subscriber terminals and the CATV accounting computer for pay-per-view and other special subscriber services.

Although numerous locations are tied to the CATV hub point by a single, highly branched conductor, broadcasters have had to rely on multiple telephone lines and enough people or computers to answer them. That could change if results of an experiment currently in the planning stages are successful.

The idea behind *TV Answer* is relatively simple. During a TV program, yes/no questions are given to viewers through normal on-screen video, VBI encoding or

audio. Viewers respond through a unit that transmits yes responses back to the TV station on VHF radio frequencies. The equipment required at the station includes a computer to control the system, to interrogate the remote transmitters and to tally responses. In the viewer's home is a modified receiver and VHF transmitter. At the station, a receiver with a high-gain antenna receives return transmissions and directs them to the computer for counting.

You might wonder how more than a few in-home units could be individually identified (for a correct tally), in as much as they essentially could respond at the same time. The problem would seem compounded as all responses are transmitted on the same frequency. The solution to that problem is one of the parts of the system that allows almost a million responses per minute to be logged.

After the question is presented on the air, the interrogation process begins. The computer begins to encode a 2-bit signal into a 0.01H portion of every active video line immediately after the color burst. On most receivers, the 0-1 bits will not be visible on typically overscanned CRTs. The decoder device looks for the 0-1 bit signal on a specified video line that is uniquely assigned to that decoder. Each decoder has been preassigned a specific line number, allowing a sequential interrogation of all units to proceed.

Connected to the decoder is a response device with a single button. If the button is pressed, a yes response will be given. If the button is not depressed, a no answer is assumed for that unit.

Reception of the 0-1 bits also enables and initiates a transmission from the 20W ERP solid-state transmitter that is built into the response unit. The transmission, according to the application to the FCC for an experimental license, is best considered a NON-type emission. Although the signal from the transmitter is a single pulse, it is filtered and shaped to reduce the number of harmonics that would typically be generated by fast rise and fall time pulses.

In order to derive an accurate count of responses, a special timing system is put into play. Theoretically, responding

transmitters could be placed in locations that would result in more than one response being received at the same time. Such a coincidence in two or more responses would probably result in an error in the tally. However, if an idea modified from radar range validation is applied, such conflicts can be solved.

The database in the computer will know where each of the units are placed. Therefore, upon the generation of an interrogation enable pulse for unit M, a valid reception window is opened. The length of the window, for any unit, is determined from the known distance to the unit and, therefore, a time delay experienced by a TV signal transmitted to that location and the additional time required for the radio signal to return. If a pulse is received within that window, it is considered valid. If no pulse is received, the response is considered negative.

Although limited modification would actually be required to install the necessary decoder in a television, the equipment planned for use in this experiment is a modified VCR. The remote-control unit will include the yes response button. Also packaged in the VCR case is the 20W transmitter and its input-filtering circuit.

The license application requests a 500kHz bandwidth for the experiment. It is known that pulses consist of an infinite bandwidth of frequencies. With filtering and shaping circuits, the required bandwidth is reduced to 200kHz, although it is doubled by modulating an RF carrier. Accuracy of the crystals controlling the radio carriers will demonstrate an estimated ± 100 parts per million (22kHz at 220MHz). Adding the variance of carriers caused by crystals and the RF envelope, the absolute band requirement is estimated at 422kHz.

This system provides some interesting possibilities for the broadcaster. Not only could it allow almost immediate ratings to be determined, it could be used as a means of taking opinion polls. Also, depending upon how well the identity of each pulse can be determined, it could be used for shop-at-home programming.

The schedule for the experimental operation of *TV Answer* is uncertain, but the FCC has given approval. [:-:~)]]]



The mic mixer you would have designed yourself—The Shure M267.

In the space of just two years, the Shure M267 has become one of the most well-known and widely used mixers in the broadcast industry. One look at it will tell you why.

The M267 gives you the improvements you've told us were most important. Every channel has a mic line level switch for maximum flexibility. There's also a built-in limiter to keep the M267 from overloading at critical moments. The unit contains a built-in battery pack that utilizes three standard 9-volt batteries.

Simplex (phantom) power and a peak LED are standard, too.

The M267 oscillator provides a clean 1 kHz tone, and is located on the front of the unit for simple access. The headphone output is also on the front and includes a level control. IC design, along with active gain controls, provides greater headroom and quieter operation.

For location work or even studio post-production, the M267 carries on Shure's reputation for reliability and ruggedness.

For more information on Shure's complete line of mixers, call or write Shure

Brothers, Inc., 222 Hartrey Avenue, Evanston, IL 60202, (312) 866-2553.

SHURE®

BREAKING SOUND BARRIERS

Circle (8) on Reply Card

www.americanradiohistory.com

MTS PROCESSING and A SUPERIOR GENERATOR FOR LESS



THAN MOST OTHER GENERATORS

The TVS-3002 Limiter/generator combines a state-of-the-art digitally synthesized MTS generator with new generation limiter-AGC circuitry to provide a complete, stand-alone stereo television audio system.

Through the use of unique circuit designs and packaging concepts, this one box system contains all that's needed to get you on the air in stereo **quickly and easily**.

The heart of the TVS-3002 is a time proven digitally synthesized subcarrier modulator that develops a digital approximation of the subcarrier and pilot frequencies. This system greatly relieves the filter requirements following the modulator, significantly improving the stereo separation specification.

To complete the system, the TVS-3002 includes the following additional features.

- L/R or L + R/L - R Inputs
- > 20 dB Leveling AGC Range
- Unique Program Controlled Stereo Sound Field Enhancement circuitry
- CRL's Exclusive Variable Transfer Function Pre-emphasis Limiting
- Factory dbx® Encoding
- Improved dbx® Noise Reduction that reduces noise floor transmission by up to 20 dB over other existing generators
- On-Board Bessel Tone Calibration Generator
- Add the TVS-3002 Multiband Audio Controller for the ultimate in audio control and stereo generation.

Before you spend more and get less, we encourage you to contact CRL for further information and arrange for a demonstration of the NEW GENERATION MTS systems.

**A
GENERATION
AHEAD**



CRL Systems

2522 West Geneva Drive
Tempe, Arizona 85282
(800) 535-7648 (602) 438-0888
TELEX: 350464 CRL TMPE. UD.

Circle (9) on Reply Card

dbx is a registered trademark of dbx, Inc.

www.americanradiohistory.com

Advantages of SCPC satellite services

By Elmer Smalling III

Unlike video, which requires a bandwidth of at least 6MHz, high-quality audio signals require 100 times less bandwidth for FM transmission, normally 60kHz. Audio signals transmitted over satellites can be computer data or high-fidelity audio originated by one of many satellite networks or radio news-gathering units. Although thousands of non-broadcast, narrowband telephone calls are distributed by satellite, their transmission (by common carriers) is not within the scope of this column.

It is important to understand the difference between SCPC (single channel per carrier) and subcarrier systems. SCPC systems consist of a discrete modulated



carrier transmitted over a satellite transponder. One transmission mode for audio is a subcarrier system where the signal is transmitted using a carrier that is locked to a video carrier much the same as the sound portion of a TV signal (see Figure 1). The SCPC carrier (see Figure 2) is generated separately from any other signals using the transponder and must be received in a like manner. To detect (receive) the audio from a subcarrier system, the receiver must be locked to the video carrier.

As an example of the two kinds of transmission modes, the audio subcarrier for transponder No. 6 on F3 is at 6.8MHz and is identified as such. If it was an SCPC signal it would be called a 3826.8MHz signal transmitted through satellite F3. Tuning out from the video carrier on a standard satellite TV receiver you may discover up to eight or nine separate audio subcarrier services in addition to the audio for the accompanying video. These subcarriers may be located at the following frequencies:

AUDIO SUBCARRIER

Audio for video	6.8MHz
Service No. 1 left	5.40MHz
Service No. 1 right	5.94MHz
Service No. 2 left	5.58MHz
Service No. 2 right	5.76MHz
Service No. 3 mono	6.435MHz
Service No. 3 left	7.38MHz
Service No. 3 right	7.56MHz
Service No. 4 mono	7.69MHz
Service No. 5 mono	7.78MHz
Service No. 6 mono	7.87MHz

Any one of these hypothetical subcarriers (there are many possible configurations) may be received using a standard, tunable satellite receiver. SCPC signals can be received only with a special SCPC receiver that is normally tuned to a single carrier. To tune more than one carrier you must use additional receiver cards or special FM receivers capable of tuning the frequency range of the transponder on which the SCPC is transmitted.

Single carrier per channel systems do not require a video carrier and, therefore, many can share the entire transponder bandwidth of 36MHz to accommodate up to 1,200 narrowband telephone signals or 100-plus high-fidelity audio discrete channels (carriers). Most of the radio networks and those transmitting analog data employ SCPC transmission. Westar III alone handles more than 130 SCPC broadcast quality signals on five of its transponders.

Advantages of SCPC transmission:

- SCPC does not require the great bandwidth of a video carrier and, therefore, sky sector (satellite) lease costs are far less than for a video transponder and attendant subcarriers.
- The antenna required for SCPC systems is usually one-third the size of a TV TVRO unit.
- Higher fidelity is possible using SCPC because of reduced demodulation loss and less distortion due to main carrier video and other subcarriers.

SCPC has a big future on the Ku- and Ka-bands where antenna sizes will allow comfortable rooftop antennas and set-top tuners for hundreds of audio services. This satellite service may some day replace the existing use of VHF radio for audio program distribution.

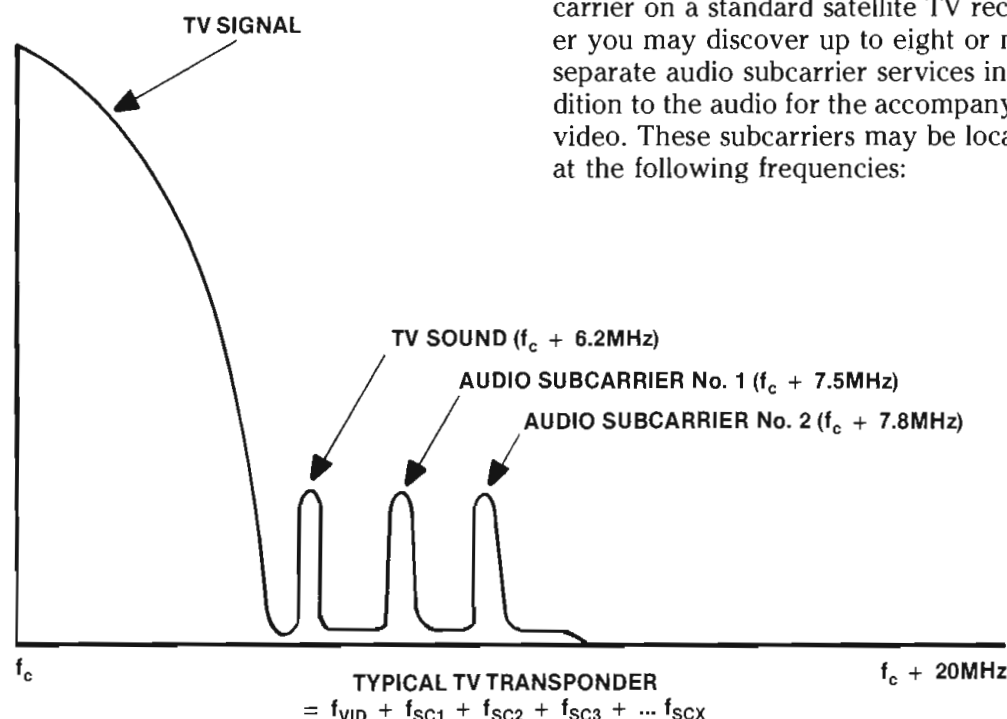


Figure 1. The SCPC carrier is generated independently from other signals on the same transponder.

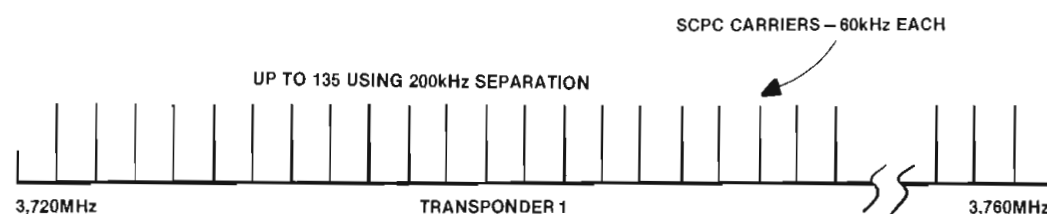


Figure 2. Audio subcarriers, locked to a video carrier, may contain a number of channels per transponder carrier.

TAKE YOUR BEST SHOT

Otari's ARS-1000 Automated Radio Station Reproducer has taken just about everything that broadcast operation has thrown at it. From continuous day after day operation in hot, dusty corners — to cigarette smoke and coffee spills, an ARS performs automation tasks flawlessly and faithfully.




Born from Otari's line of heavy duty duplicating and loading equipment that moves tape at up to 480 ips, the ARS-1000 is engineered for continuous use, simple operation, and ease of maintenance.

Bulletproof? Of course not. But it is the kind of equipment that frees you to get involved in the real challenges of today's new, dynamic radio. Because you're not constantly fixing something that shouldn't have broken in the first place. From Otari: The Technology You Can Trust.

Contact your nearest Otari dealer for a demonstration, or call Otari Corporation, 2 Davis Drive, Belmont, CA 94002 (415) 592-8311 Telex: 910-376-4890

OTARI®

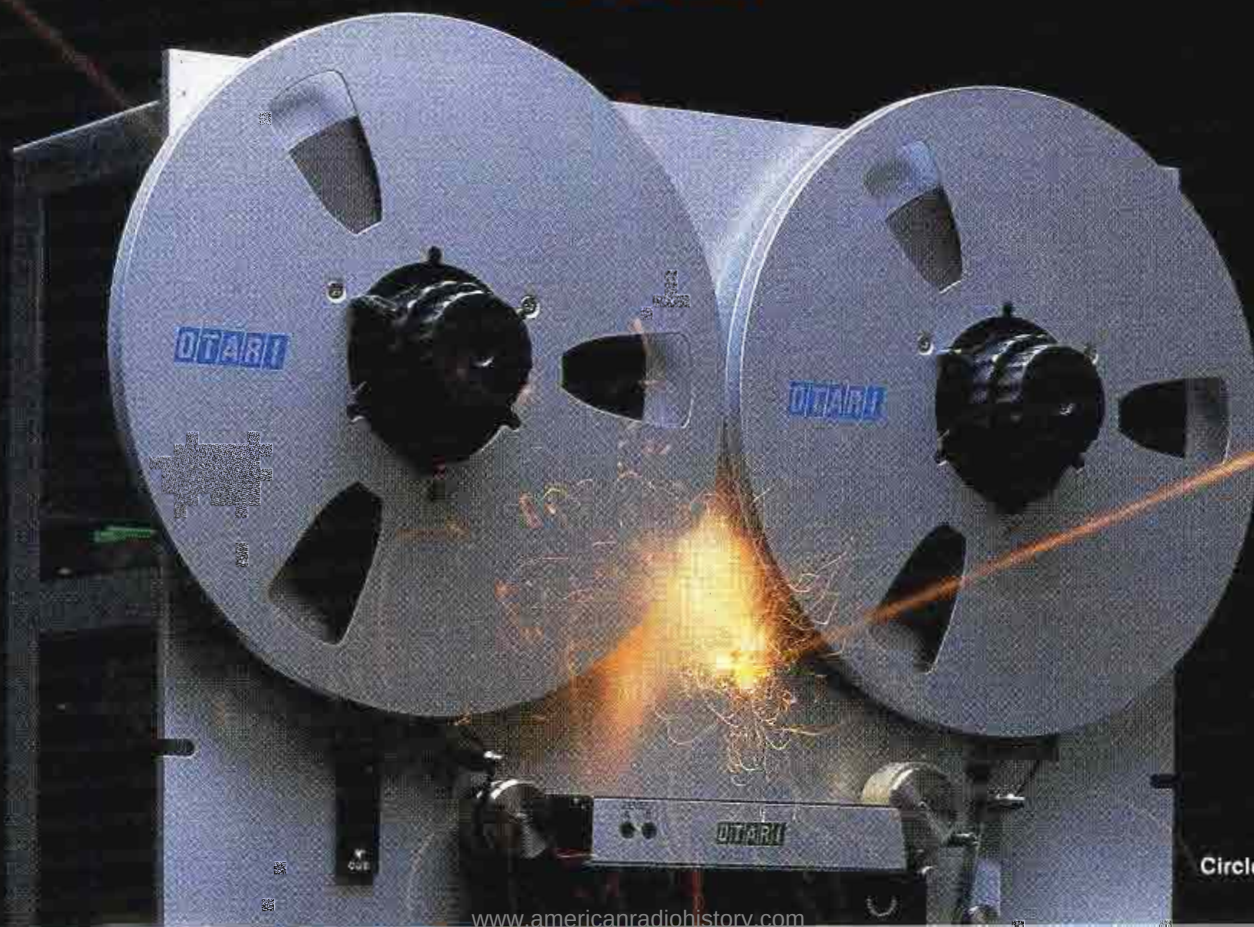

© Otari 1984

Circle (10) on Reply Card


Inside digital technology

By Gerry Kaufhold II

Many factors affect the timing of signals in a digital circuit. The master clock frequency sets the upper limit on how fast signal transitions can occur. *Divide-by* circuits, made up of flip-flops, reduce the clock rate for use by decoders, which develop and then distribute timing signals that are synchronized with the master clock.

As timing pulses travel down printed circuit paths and pass through buffer ICs and edge connectors, part of their energy is dissipated. This causes rise times to stretch, and reflected energy from previous pulses causes overshoots, undershoots and adds distortion, similar to timing errors in a TV plant.

At the destination gate, a timing signal has an effect only after it goes above (or

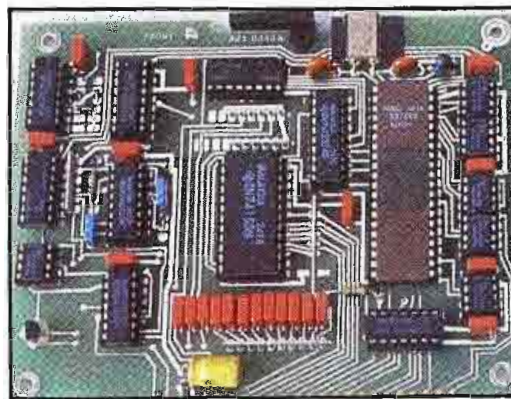

below) the switching threshold of the transistors that form the input of that circuit. For a system using a 5V supply, CMOS logic recognizes anything above 3.5V as a high-level logic 1, and TTL recognizes anything above 2V. The width of a pulse may depend on the logic threshold.

Determining that the transition of a timing signal is arriving at the correct time and at the proper voltage level is trickier than might first be expected. Adding to the complexity is the interdependence of many signals that must perform together for the entire circuit to operate properly.

Oscilloscopes and digital timing

Dual-trace oscilloscopes are easy to use, convenient and readily available. Because digital timing signals occur in sync with the master clock, it is a good idea to use the master clock (or a divided-down version of it) as external sync for the scope. Although two signals can be viewed, only a few hundred microseconds of each can be seen.

If the *chop* mode is selected, portions of the signal can be viewed and the timing of the two signals, relative to each other, will be correct. However, if the rate-of-change of the signals under test is above the chopping frequency of the scope, some signal transitions will be lost. Because most oscilloscopes chop at a slow rate compared to the duration of timing signals, the *chop* mode may not be adequate for viewing most timing signals.

If the *alternating trace* mode is selected, the situation illustrated in Figure 1 may occur. Many uninitiated digital technicians make the mistake of incorrectly interpreting the waveforms they see in the *alternating trace* mode. There really isn't anything about signal A or B that can be determined from the setup in Figure 1, other than that a signal is present. Nothing relating to timing can be verified accurately.

What about voltage threshold levels? Using an analog scope requires looking very closely at the graticule and then making a judgment call about which point of the waveform actually causes

the destination circuit to operate. What would be the case if the timing problem occurred only when a particular chip was being accessed—how would the scope be triggered?

Logic analyzers

Logic analyzers solve the voltage threshold problem by actually providing a CMOS- or TTL-level threshold circuit right at the inputs of the data acquisition probes. By connecting the clock input of the logic analyzer to the master clock, all subsequent timing signals will be viewed in sync with the clock of the device under test. The logic analyzer will display the transitions of the digital signal exactly as the circuit under test will use them.

Unlike the oscilloscope that can display signals only while they are occurring, logic analyzers store the data so it can be analyzed carefully. Many of today's logic analyzers provide for storing important triggering setups, so that tests can be semi-automated or keyed to specific types of problems. By repeatedly experimenting with the triggering scheme, a technician can zero in on a problem and then save the final setup.

Not only is this process effective for troubleshooting, but having a logic analyzer in-house can be an excellent learning tool. Many technical colleges use logic analyzers in their core courses in digital electronics. Broadcast engineers, through SBE, might contact a school and schedule a visit to see logic analyzers in action. Considering the amount of broadcast equipment that contains digital circuits, learning about logic analyzers can be a useful and enjoyable excursion.

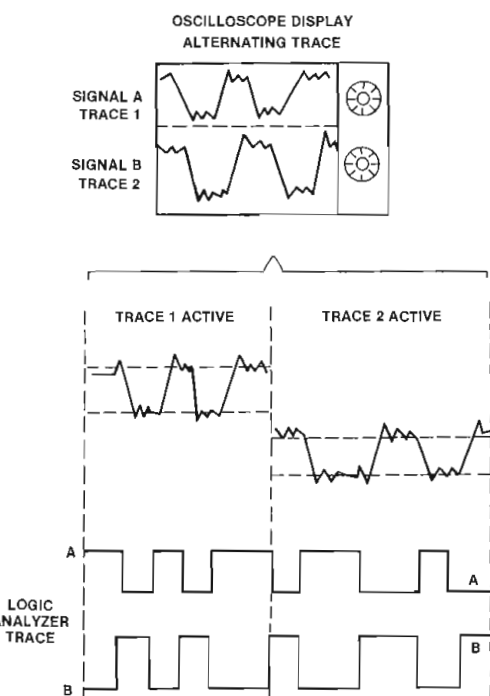


Figure 1. Although the logic analyzer provides accurate timing of displays of two digital signals, the dual-trace oscilloscope erroneously shows signal B to be a slightly delayed version of signal A.

Our first TV Stereo Generator was very good. Our second is great.



**The Orban 8182A/SG TV Stereo Generator.
Our first TV Stereo Generator.**



**The Orban 8185A TV Stereo Generator.
Our second-generation stereo generator.**

Our first-generation stereo generator is used by more stereo television stations than all other makes combined.

Now, Orban introduces a new *second-generation* generator, with significantly improved versatility, setup ease, and measured performance.

Our *new* second-generation stereo generator is designed to supply the best possible results regardless of your choice of audio processors. For non-Orban processors, it includes separate balanced left and right inputs, flat or pre-emphasized. For Orban's OPTIMOD-TV Audio Processor, a multi-pin interconnect permits interleaving the stereo generator's low-pass filters with the audio processor's circuitry, yielding the brightest sound and lowest distortion.

Our *new* second-generation stereo generator includes a built-in Bessel null calibration tone that's not dependent upon the accuracy of a local crystal—it locks to station sync. Just switch on the tone, adjust the BASEBAND OUTPUT control for carrier null, and maximum separation is ensured!

Our *new* second-generation stereo generator uses our new Hadamard Transform Baseband Encoder™. It's a switching encoder using digital techniques to approximate a sine-wave multiplier. Most performance specs are so good that they can't be reliably measured. And the new Hadamard Transform Baseband Encoder has even better stability than our already excellent analog encoder.

In our *new* second-generation stereo generator, the steep low-pass filters, which guarantee excellent high-frequency response coupled with the industry's best rejection of non-linear crosstalk, have been phase-corrected for constant group delay from 30 to 12.5kHz.

Subjectively, this should make the most ardent audiophiles happy. Objectively, the 8185A has far fewer overshoots to light the peak flashers and possibly overload your exciter.

Improved noise reduction circuitry results in even better separation measurements with both swept-sinewave and dynamic program.

There's also true peak-reading metering of input, circuit, and composite output levels for easy setup and verification of proper operation, and an easy-to-follow Installation and Operation Guide is included.

Our *new* second-generation stereo generator still comes with the best manual in the business, and with the experience and expert assistance of Orban Customer Service, just like our first-generation stereo generator did.

For a brochure on the *new* 8185A TV Stereo Generator, to arrange a demo through an Orban Television Products Dealer, or if you have any questions, please call:

Orban Associates Inc.

645 Bryant Street, San Francisco, CA 94107 USA
Telephone (415) 957-1067 or (800) 227-4498 Telex 17-1480

orban

Circle (11) on Reply Card

Plan for changes in DMM design

By Rey P. Harju

General trends in electronic manufacturing will bring some significant changes in hand-held digital multimeters (DMMs). Some of these changes are appearing already and some are just on the horizon. Begin taking advantage of these trends now by reviewing your plans for specifying, purchasing and repairing DMMs for the next few years.

Areas of change

The current trend toward smaller and less expensive electronic equipment, including portable test instruments, is expected to continue. A trade-off for this convenience and economy might be reduced repairability, especially in the field.

Another major trend is toward further large-scale circuit integration and compact packaging. Silicon-foundry chip technology is making it feasible for manufacturers to develop more custom designs and to offer a wider variety of products.

Small, compact DMM circuits are being made possible through surface-mount assembly of printed circuit boards (PCBs). This technique uses a single reflow solder operation to fuse solder tails of components to preformed puddles of solder on the PCB. This eliminates the need to machine through holes in PCBs, a high-cost, precision process.

Advanced DMM circuitry

The basic functions of tomorrow's DMMs will not differ radically from products available today. Yet, future refine-

ment of existing designs may result in instruments that appear quite different.

DMM circuitry comprises five basic stages: input protection, switching, input conditioning, analog-to-digital conversion, measurement and display.

The input protection stage of the DMM is designed to prevent electrical overloads from damaging subsequent stages of the instrument. Replacing the conventional spark-gap high-voltage input protection is the metal oxide varistor (MOV). When an MOV reaches the voltage breakdown point, its characteristics change from a resistor to a conductor, shunting the overload to ground. The MOVs currently found in some professional and heavy-duty DMMs can handle overloads of several thousand volts. Watch for MOVs to be used more extensively in DMMs.

In the DMM's switching stage, the user typically selects the measurement function and range by push-button or rotary switch. Because a mechanical switch in any electronic device is a common source of error, or even failure, future DMM designs should incorporate all-electronic, microprocessor-controlled switching. However, eliminating mechanical switching entirely may not be feasible. Look for touchpads of sealed, flexible plastic or conductive rubber.

The analog inputs of a DMM are sampled digitally by a microprocessor. Measurement is performed typically by one IC chip in a dual-slope integration process, which is accurate and repeatable. Look for custom LSI CMOS IC designs to bring true rms measurement to DMMs.

In most of today's DMMs, display control is integrated with A/D and measurement functions in a single microprocessor chip. In the future, display control may be implemented in a separate chip. This will allow the display controller to be customized for each model. The user would be able to choose from a variety of display formats, perhaps by keying selections on a touchpad.

For example, a numeric reading might be converted to a bar-graph display, as is done on some DMMs today to simulate d'Arsonval movement. With the increased capabilities of a separate display controller, bar graphs can be rendered more accurately and with finer gradations.


Longer battery life

The useful life of DMM batteries has grown longer in recent years. This is due primarily to lower working voltages within the meter as a result of LCDs and the use of CMOS chip technology for the internal microprocessor. Today's state-of-the-art DMMs may expect about 2,000 hours of service from batteries but in the near future, battery lifetime could be about 4,000 hours.

Increased battery life should follow the introduction of lithium batteries to the industrial marketplace. The technology is not new, but the toxicity of lithium has been a barrier. New battery designs are intended to prevent the chemicals from leaking out, even if the case is damaged.

Increased sensitivity

A related improvement in DMM performance will accompany a trend toward lower working voltages. Many DMMs apply test voltages of 3Vdc to 4Vdc in component test mode. Test voltages in this range can cause diode switching in the circuit being tested, perhaps activating a device accidentally. When dealing with microcircuitry, it is desirable to use test voltages in the millivolt range. Improved DMM sensitivity will make it practical.

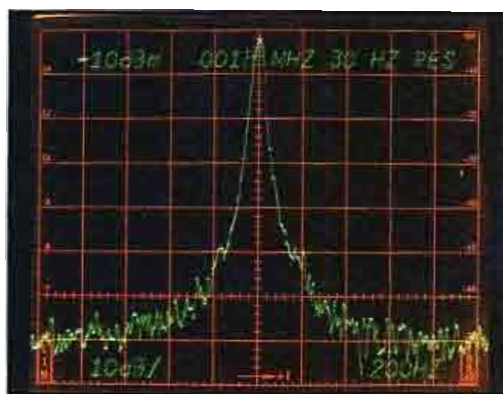

Harju is new business manager for Beckman Industrial, Brea, CA.

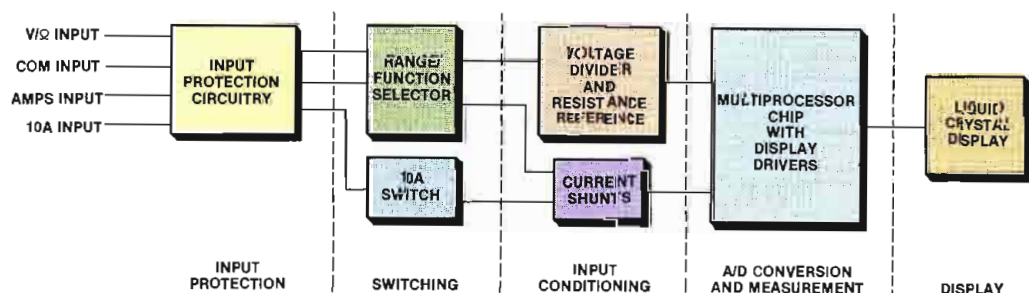


Figure 1. Simplified block diagram of a DMM. True rms conversion, if provided, is handled in the multiprocessor.

Editor's note: This article was adapted from "The Future of DMMs," which appeared in the March 1987 issue of *Microservice Management* magazine, an Intertec publication.

Compatibility



Prove it yourself. Choose the editing controller that's best for your needs. Then complete the editing system with JVC's CR-850U... compatible with virtually every editing controller on the market.

A/B roll editing. Single frame edits for animation. Cuts-only editing for news or post-production. All with proven

reliability, speed, accuracy, and picture quality you've come to expect.

So when it comes to state of the art editing, see what the CR-850U can do for you. Ask your JVC Professional Video Dealer to demonstrate it. For a catalog, call toll-free

1-800-JVC-5825.

JVC COMPANY OF AMERICA, PROFESSIONAL VIDEO COMMUNICATIONS DIVISION, 41 SLATER DRIVE, ELMWOOD PARK, NJ 07407 JVC CANADA, SCARBOROUGH, ONTARIO

JVC®

© 1987 JVC Company of America

Circle (12) on Reply Card

www.americanradiohistory.com

Management

You'll find a balance by combining theories

By Brad Dick, radio technical editor

Are you a *Kissy-Face Huggy Bear* (KFHB) or a *Stupid Son of a Bear* (SSOB)? We all know of supervisors or managers who are befitting of these labels, which represent two extremes of management style. The KFHB is concerned primarily with people, and the SSOB, with task.

These two popular labels are the results of two opposing management theories developed in the early 1960s by Douglas McGregor. His theories, which have become known as theory X and theory Y, deal with the spirit of human nature, motivation and the manager. Each theory is based on its own assumptions about human nature.

Some theory X assumptions are that people:

- are basically lazy creatures, do not like work and complete tasks only when forced;
- avoid responsibility and would rather be told what to do;
- lack creativity and should not be involved in the decision-making process;
- become motivated only when their basic survival needs are threatened; and
- must be closely supervised.

Some theory Y assumptions are that people:

- enjoy work because it is an activity employing the same elements as play;
- need to feel they are in control of elements of the organization's goals;
- can creatively control themselves in their jobs if given the opportunity; and
- should be allowed to participate in the goal-setting process.

Leadership style

A leadership style based on theory X assumptions about human nature might be called the *task master* philosophy. A theory X style manager is concerned only with production. This type of manager decides who makes the decisions. A task master may attempt to manage employees through physical force, power or moral authority coupled with monetary compensation.

On the contrary, a manager who bases a leadership style on theory Y assumptions emphasizes participation and communication as motivational tools. A theory Y manager allows input, probably



talks with the workers about decisions and looks for ways to integrate the employees' goals with the company's goals.

As you study these leadership styles, keep in mind that neither is completely right or wrong. The truth about what motivates a person lies between these two assumptions. Although the majority of managers say that they believe in theory Y management, most company policies, rules and procedures are based on the control of human behavior through theory X practices.

Managerial grid

The grid shown in Figure 1, developed by Robert Blake and Jane Mouton, may help to explain the range of management styles available. The horizontal axis scales the degree of concern for task. The vertical axis measures concern for people. The SSOB could be placed at the 9/1 coordinate position on the managerial grid. This type of manager treats workers as commodities, as if they were machines. The KFHB, at the opposite end of the spectrum, could be placed at the 1/9 coordinate position. This manager would place importance on good fellowship and a country-club atmosphere in the workplace.

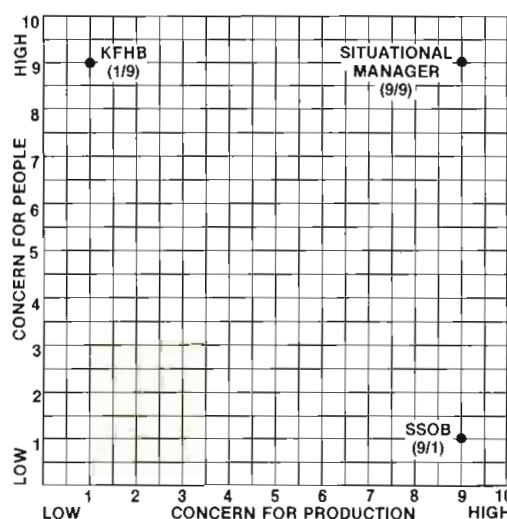


Figure 1. Are you people-oriented or task-oriented? The managerial grid provides a visual representation of a supervisor's attitude toward the work as well as the people who perform it.

Your style

You may not see yourself as either of these types of leaders; instead, you might think of yourself as a mixture of the two styles. If you are really brave, ask your subordinates where they would place you on the managerial grid.

Theory Y management practices may, in the long run, be more effective in promoting employee support. However, this is not to say that theory Y is always the best approach. A combination of theory X and theory Y principles, appropriately applied, can result in the best overall organizational operation. The term often used to describe a person with such skills is *situational manager*. This person recognizes that productivity results from a successful integration of tasks and human elements.

Reader feedback

The December "Management" column about Kate, the tardy videotape operator, and Jim, her supervisor, drew many reader responses. Most of you who responded agreed that Jim made several mistakes in handling the situation.

His first mistake was in not dealing promptly with her tardiness. The second was his failure to maintain proper records of each meeting. Readers emphasized the importance of thorough documentation in dealing with any personnel problems. In regard to the lawsuit Kate later brought against the station, one reader said, "Jim's company got exactly what it deserved."

Others suggested that the station was partly at fault for not providing employee handbooks to its workers. Companies should provide such manuals, and should require new employees to sign a statement acknowledging receipt of the manual. This procedure might be helpful at your station.

If you are in a supervisory position, consider carefully what can happen when an employee is terminated. There may be more than just the employee's future on the line.

NEW FROM ARRAKIS SYSTEMS

5000 SERIES

**The First No-Compromise
Modular Radio Console...**



...At A Down-To-Earth Price: 16 Channels, Under \$10,000.

THE FEATURES YOU WANT —

- 16 Modular Stereo Channels.
- Program, Audition and Mono Mixdown Balanced Outputs.
- Telephone Mix-Minus Buss.
- Full Monitoring Facilities.
- Remote Equipment Start/Stop.
- Remote Module Control.
- Standard Digital Clock and Timer.
- Optional EQ and Effects Modules.

THE DEPENDABILITY YOU NEED —

- DC Controlled — No Audio On Pots.
- Rugged Modular Construction.
- Penny & Giles Slide Faders.
- ITT Shadow Switches.
- NE5532 IC Module Design.
- External Regulated Power Supply.
- Superb Audio Performance Specs.
- Most Important, Arrakis Systems Designed-in Ultra Reliability!


**For features, performance, price and reliability,
*NOBODY BUILDS CONSOLES LIKE ARRAKIS.***

Call (303) 224-2248

Circle (13) on Reply Card

ARRAKIS SYSTEMS INC. 2609 RIVERBEND COURT FORT COLLINS, CO 80525



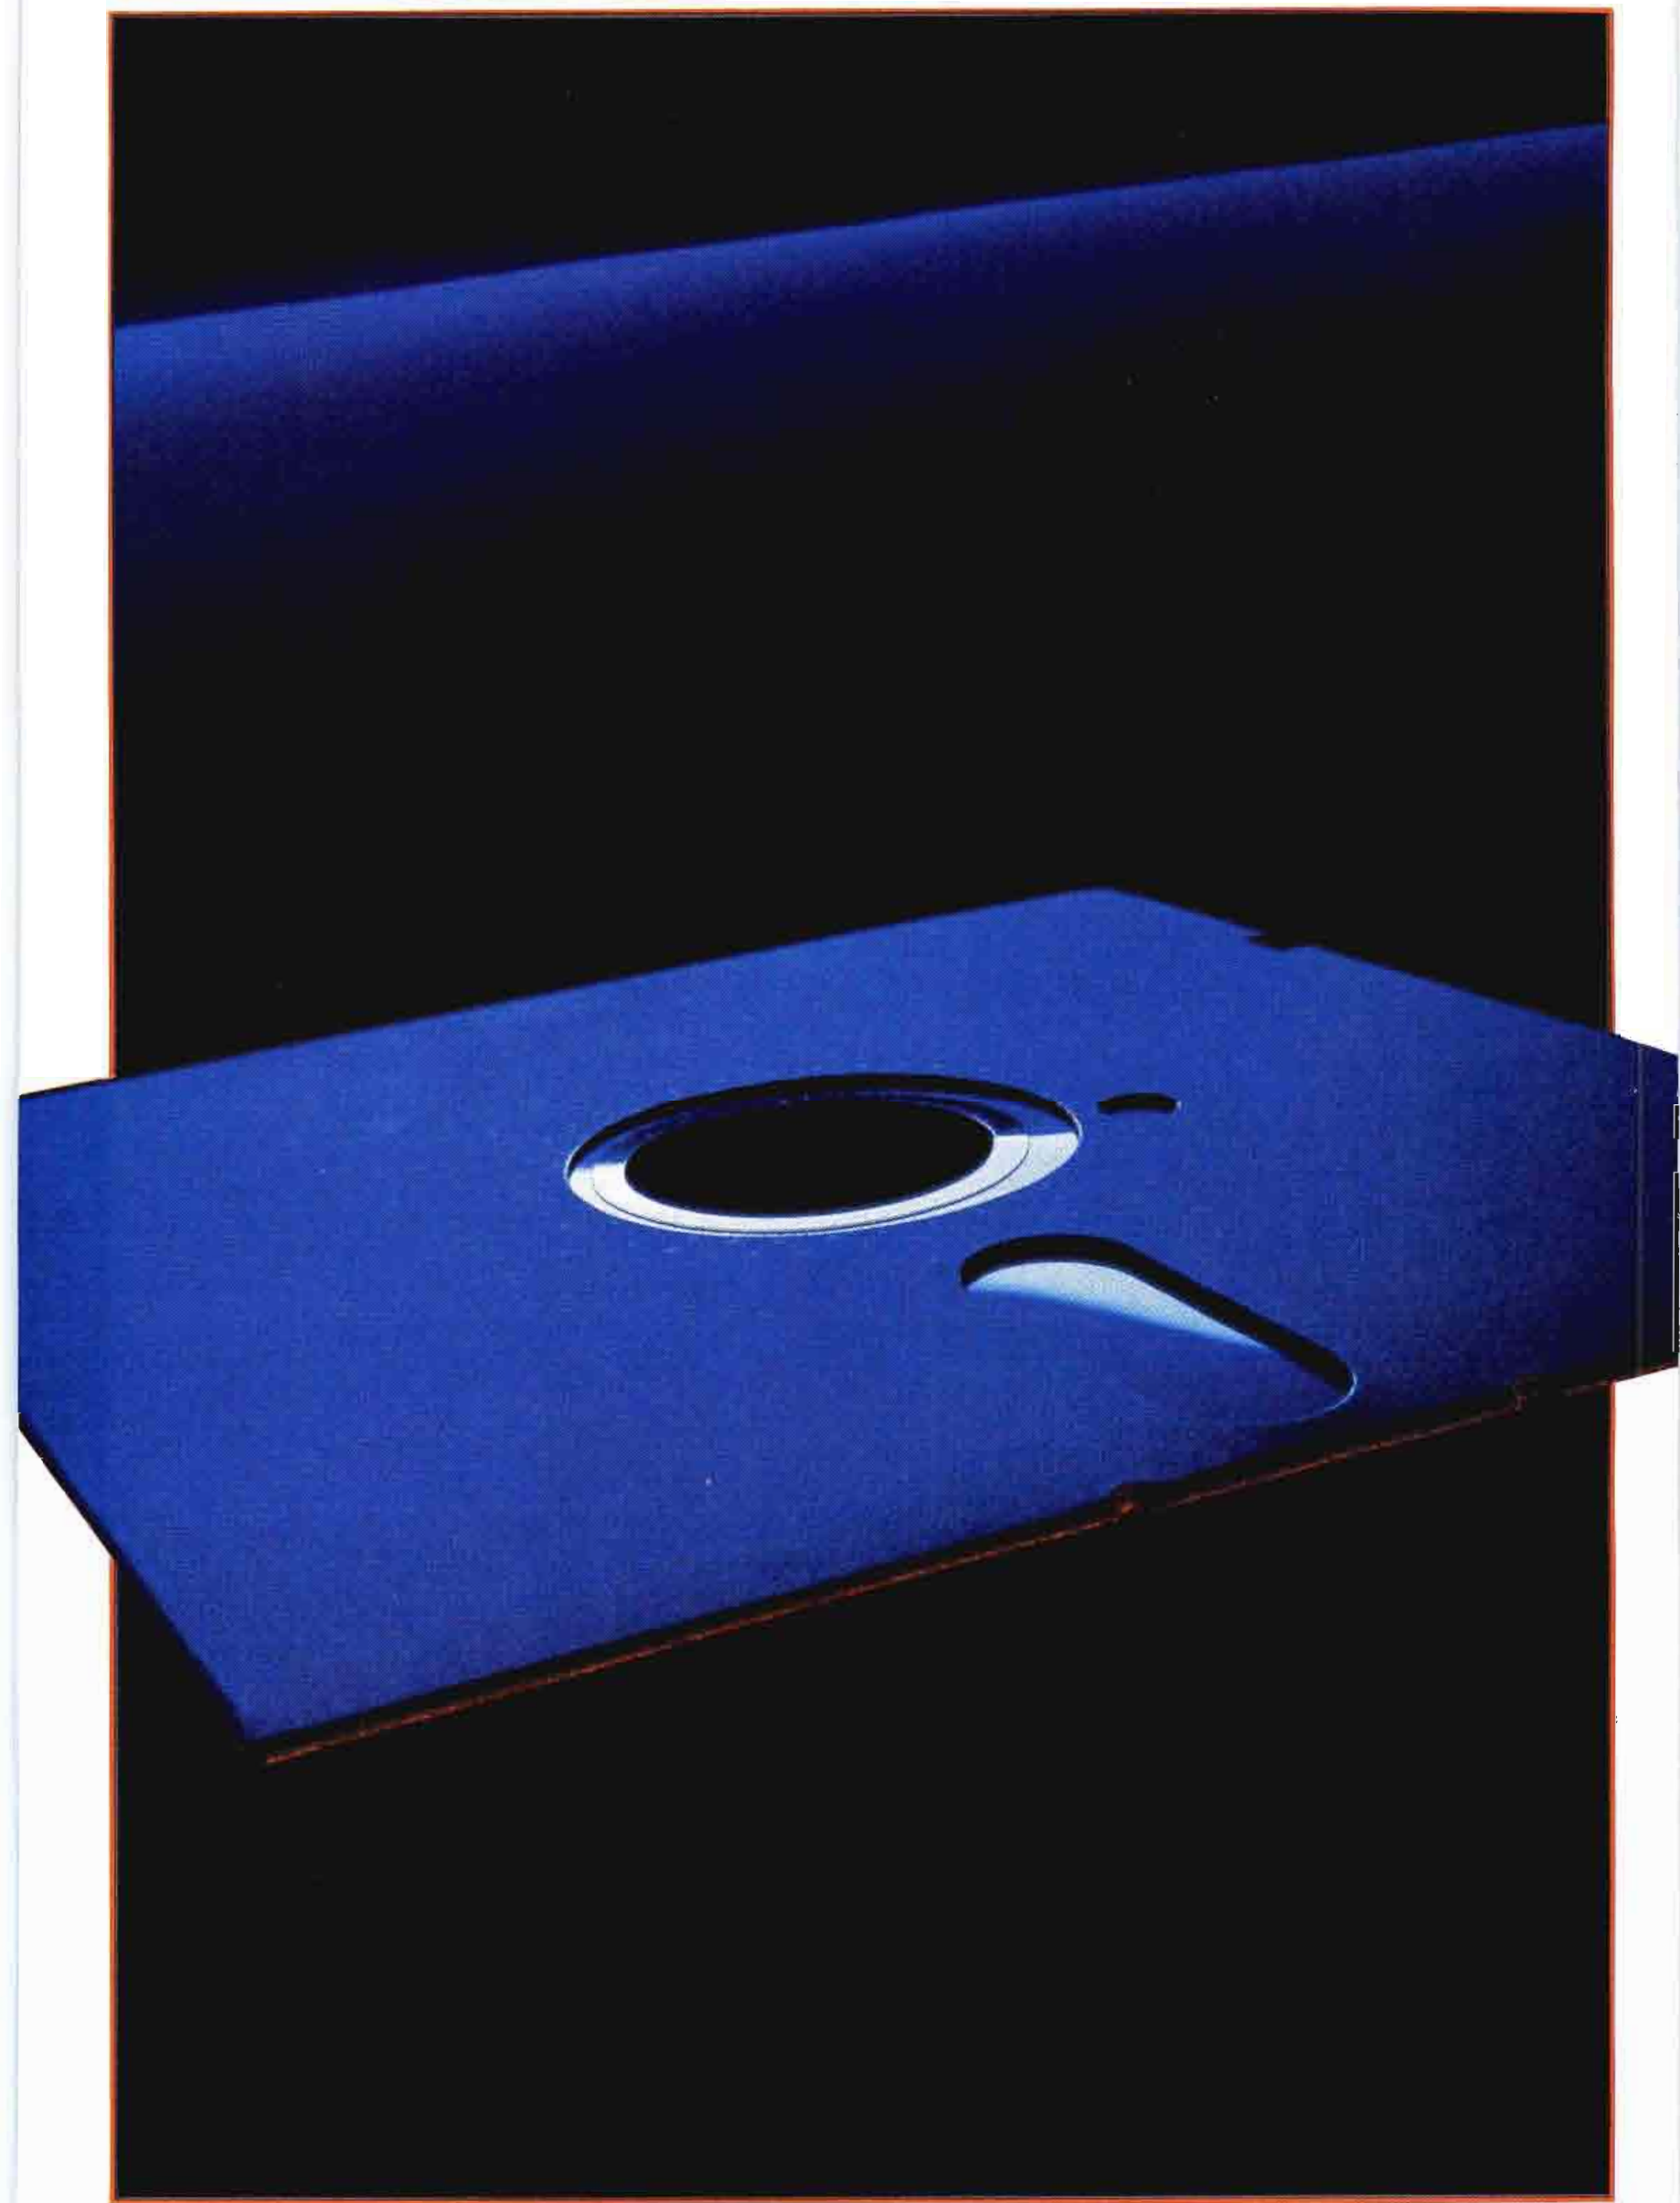

Automation in broadcasting

special report

When you get right down to it, radio and TV automation is nothing particularly new. Sure, you'll say that the computer revolution brought about by the exponential growth of the personal computer has led to advancements in hardware and software that make implementation into broadcast facilities practical and affordable. No argument there. But consider this.

The first issue of **Broadcast Engineering**, published in May 1959, contained a fascinating article titled, "A Building Block to Television Program Automation." It described an automation system for TV master control. The electromechanical monster ran VTRs, film chains, an audio-video switcher and related equipment to completely automate spot breaks. The "high-tech" system included mechanical switches and lights, relays (lots of relays!) and an interesting device called the *beam switch tube* (a neat little component that never quite made it into general circulation).

The need to bring the many varied elements of a broadcast station together into a more manageable configuration through the use of automation has been known for a long time. By and large, the needs of the industry have remained constant over the past two or three decades. The *technology*, however, has changed drastically.


Stations today are looking to automation as a way to reduce operating costs and improve program quality. Advancements in technology for the com-

puter, aerospace and consumer industries have made a significant impact on radio and TV broadcasting. Spin-off technologies have permitted the introduction of sophisticated, affordable automation equipment that would have been impossible (or at least cost-prohibitive) 10—or even five—years ago. Plus, fluid market conditions and new economic realities have changed the way many broadcasters view automation. The options are numerous and growing each year.

The following series of articles examines *Automation in Broadcasting*: where the industry is today and where it is going in the future.

- "Planning for TV Automation" Page 26
- "Serial Data Control Systems" Page 44
 - "Comparing Standards"
 - "Remote Control With the EBus"
- "Planning for Engineering Automation" Page 76
- "Computer Power Protection" Page 88
 - "UPS vs. Standby"

The only way to plan for the future is to understand the technology that will shape it. I hope this special report will help you decide how to proceed with automation at your facility.

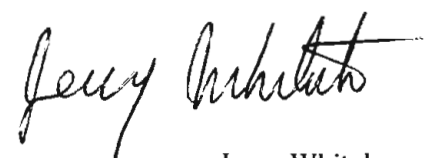

Jerry Whitaker,
editorial director


Meet our b

Half-inch has just advanced a mile. Your suggestions and our experience were combined to create a superior form of Betacam®. Betacam SP™.

It delivers improved picture signal-to-noise. Four channels of high quality audio. And choices.

For great performance choose economical oxide tape. For superior performance choose metal particle tape.

Sony Communications Products Company, Broadcast Products Division, 1600 Queen Anne Rd., Teaneck NJ 07666. © 1987 Sony Corporation of America.

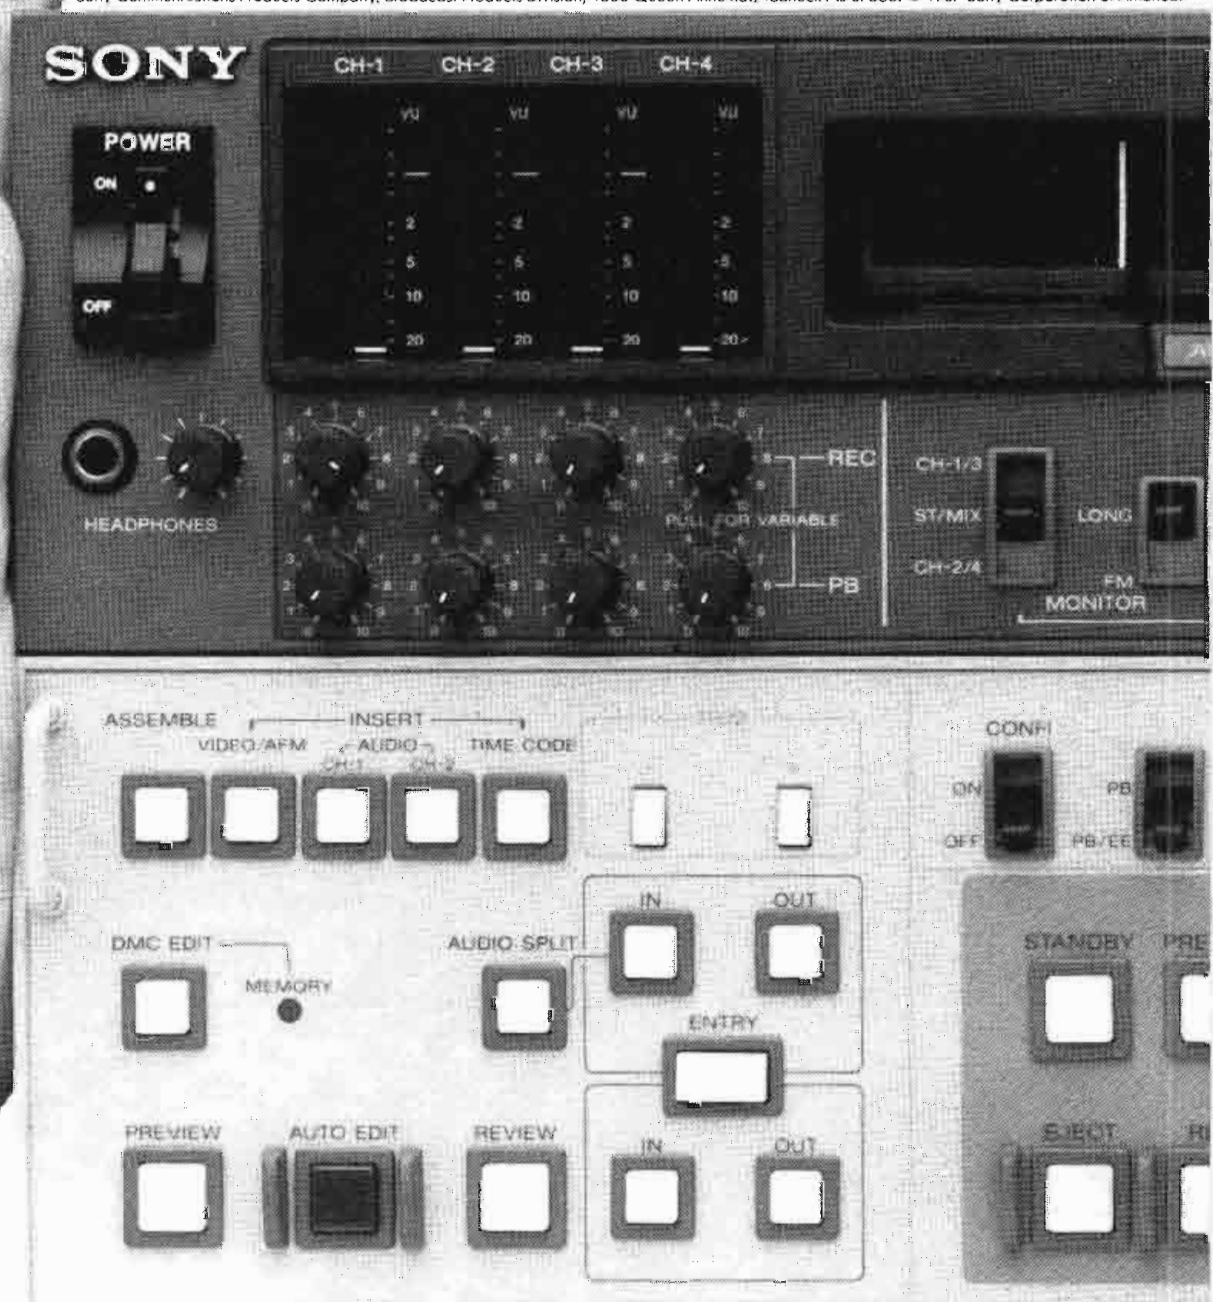

etter half.

And if you already own Betacam, you have the option of upgrading at your own speed. Because Betacam and Betacam SP are compatible. And that's a choice even your accountant will love.

For more information on the new line of Betacam products, contact your Sony Broadcast representative. Or call Sony at (201) 833-5231.


SONY
BROADCAST



Circle (14) on Reply Card

Sony and Betacam are registered trademarks and Betacam SP a trademark of Sony Corporation.



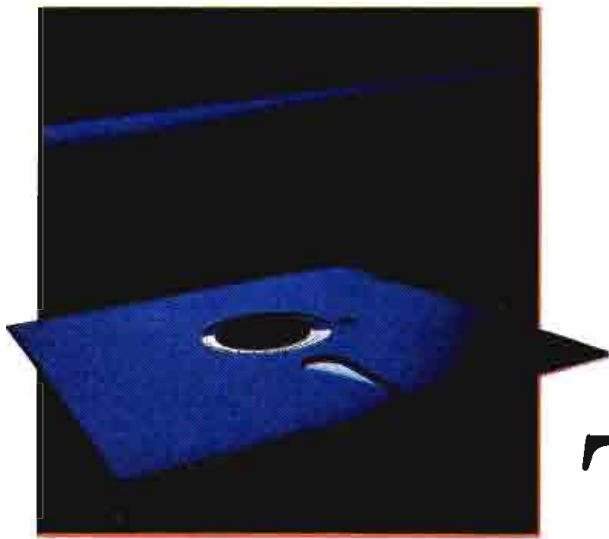

Planning for TV automation

By Don Edvalson

**Management wants it, engineering must live with it.
Successful automation is a detail-oriented science.**

Despite perceived advantages and great expectations, there is probably no other major commitment that is put off and avoided more than a station automation system. This is largely because the automation system must be interfaced to nearly everything else in the station, making the selection and installation of a system an overwhelming task. In addition, there are many questions about what a TV automation system can and cannot do, what features are desirable or important, and what effect automation will have on staffing and personnel.

Interfacing to the operator

The bottom line is that an automation system's entire purpose is to assist the operator. If it does not do this, it has failed. The failure to provide a good human interface is probably the biggest single problem with most automation systems of the past. How many times have you looked at an automation system and had no idea how to operate it? This is a sure sign of an improperly designed human interface.

A well-designed automation system is easy to use. An operator should be comfortably using the system within a few minutes after sitting down at the terminal for the first time. If this is not the case, something is wrong with the system, not with the operator.

Prompting is one of the most important considerations. Any human interface that requires you to know that you are supposed to push a Control-H or some other obscure key is more difficult to use than it should be. All user entries should come either as the result of a prompt ("Enter the source name, then hit return"), a labeled function key, or an on-screen labeled soft-key. The operator

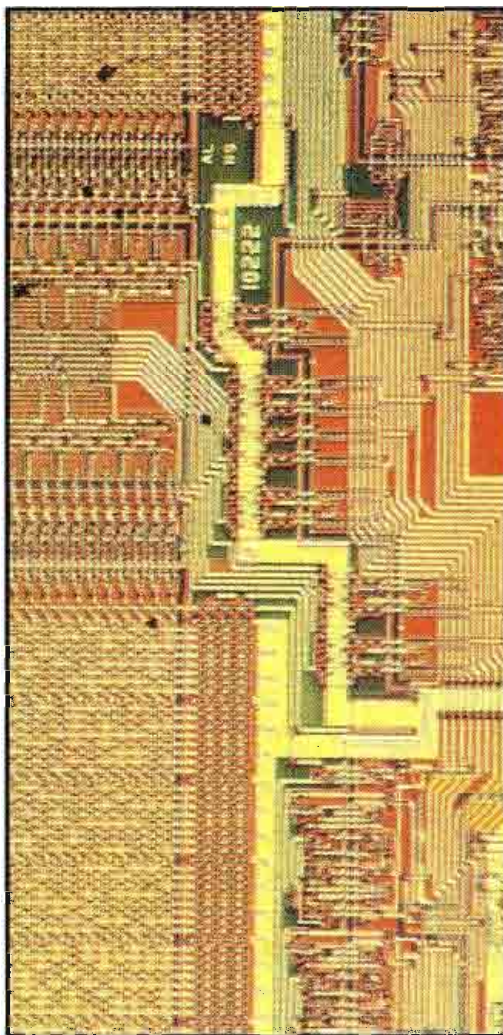


Photo by Timothy Scheffer

The microprocessor is changing the way broadcast stations are operated. Intelligent controllers can provide full automation, live-assist or business system interface.

should not have to remember that Control-I means "cursor up" or that Control-D means "delete event."

Another significant factor is terminal design. Computer terminals have changed tremendously in the past three to five years. These changes in terminal design are the result of many studies in the area of operator efficiency and

fatigue. The same things that make a terminal design good for word processing or data entry make it good for an automation system. For example, keyboards should be as flat as possible and should have properly placed keys that do not require excessive actuation force. The keyboard should have dedicated cursor and editor keys and a dedicated numeric keypad. The screen should be non-glare and have the highest resolution possible.


Some systems provide monochrome video outputs and use standard monitors in place of high-resolution terminals. This should be avoided because usually there is not enough resolution in standard 525- or 625-line video to make quality characters at the size required. Also, flicker and the lack of resolution may cause considerable operator fatigue.

The use of color terminals can substantially impact operator efficiency. High-resolution RGB color displays allow the use of color while maintaining character quality. The presence of color greatly enhances what can be displayed on the screen. Important information can be displayed in magenta or red, and less significant information can be displayed in dark blue or green. This helps the operator to quickly and efficiently observe and correct problem conditions.

Modern data entry methods such as the mouse and touch screen benefit cursor movement and pointing. It is usually best for both to be available. A mouse is the easier, faster pointing method for the seated operator who is working with the system much of the time. A touch screen is more useful to the standing, occasional user, such as a VTR operator.

Finally, the automation system should be designed to assist everyone in the facility, not just the master control operator. For example, many automation systems provide only a list of upcoming events. This screen is valuable to the

Edvalson is product manager for BTS Broadcast Television Systems, Salt Lake City.

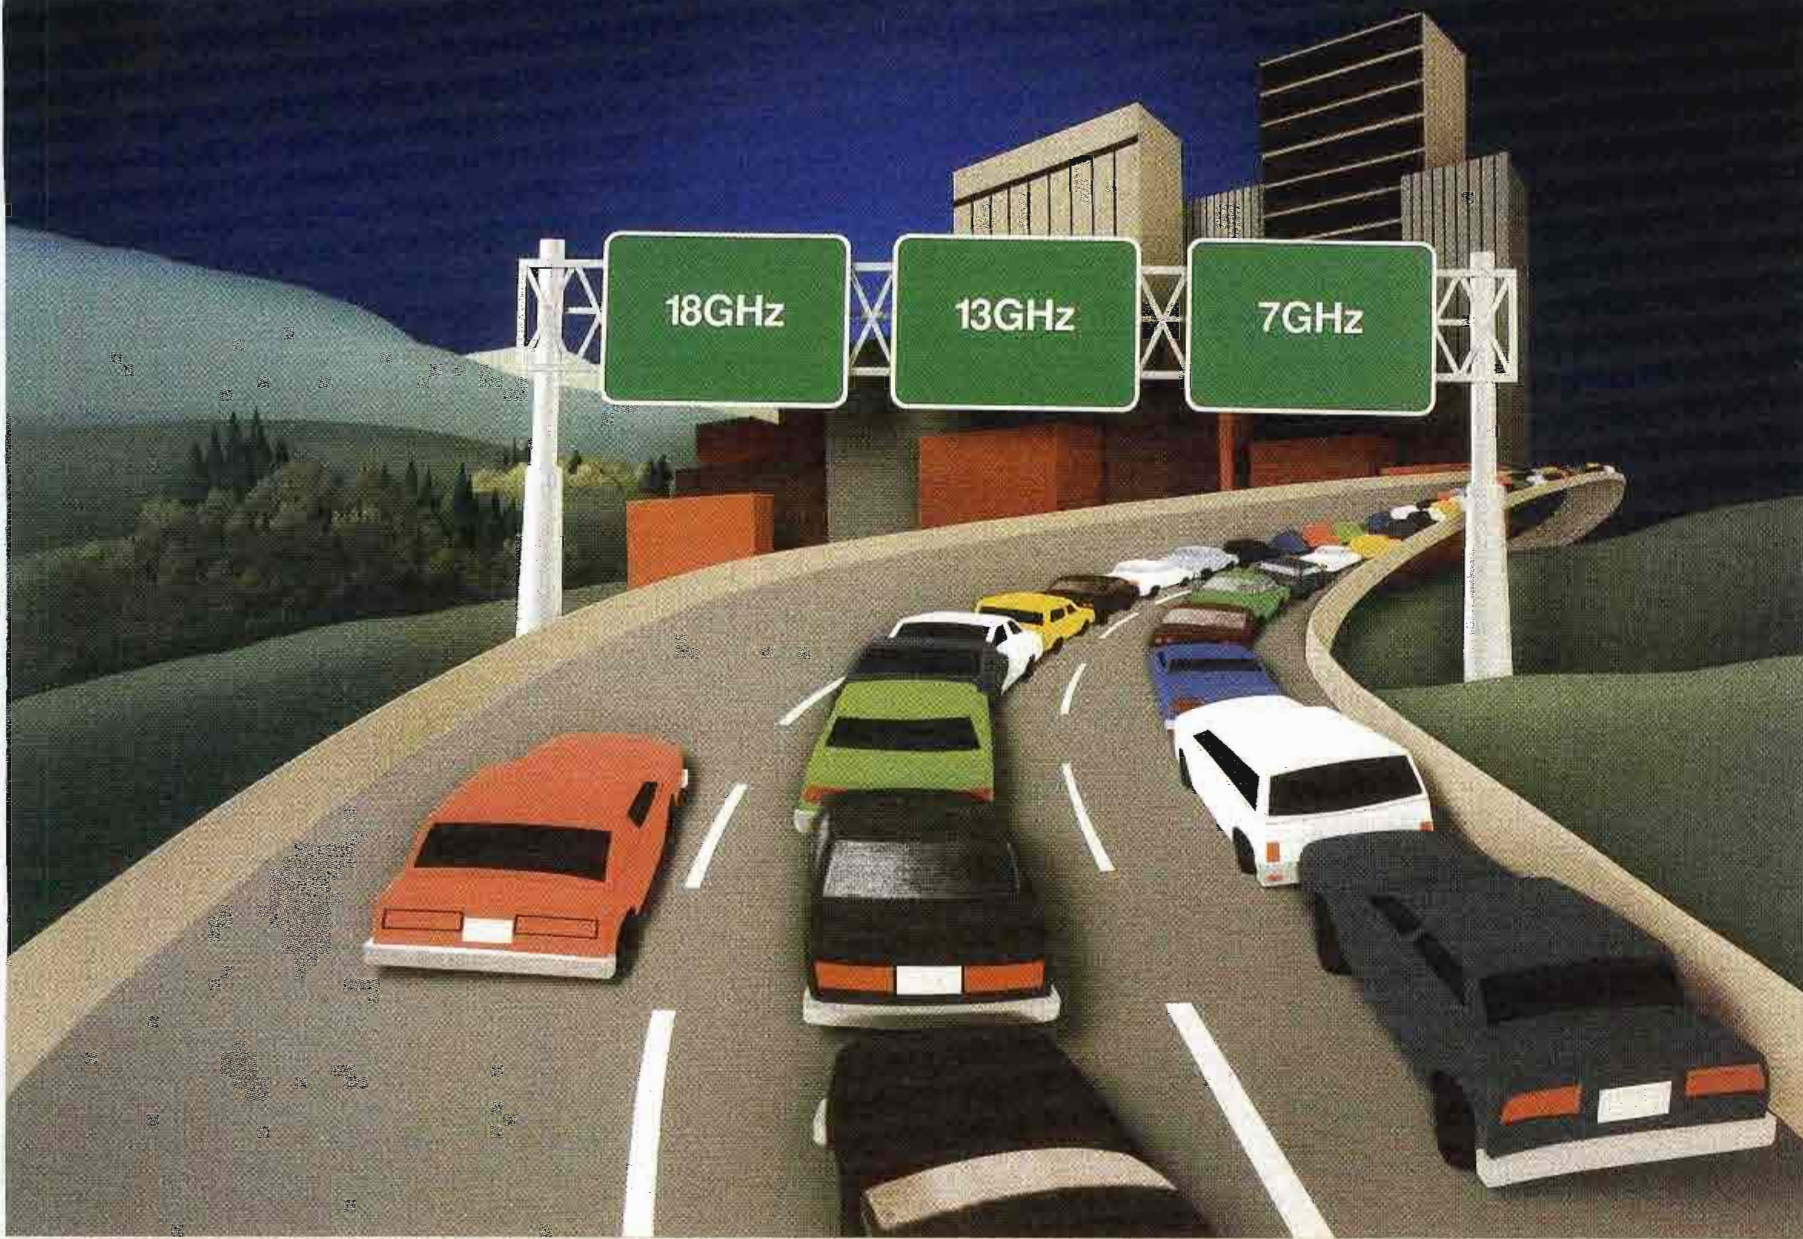

Beat the traffic.

M/A-COM opens up a new lane for broadcasters with our new 18GHz microwave system.

If you've been looking for an open frequency at 7 or 13GHz, you're not alone. In many areas, they simply aren't available: there's too much traffic and not enough spectrum.

M/A-COM's new 18GHz microwave system gives you another option: a wide-open band which the FCC has assigned to broadcast. It gives you 50% better link availability (or 40% longer range) than 23 GHz, and none of the congestion of the lower frequencies.

The MA-18CC is a fully-featured microwave system, designed to meet or exceed all RS-250B short-haul performance

specifications. It is field tunable, and a single gunn oscillator covers a wide selection of frequencies so spare parts can be kept to a minimum.

For over 20 years M/A-COM MAC has specialized in providing microwave radio equipment to broadcasters. Every unit

with our name on it is built in our own factory, so we not only control the quality, but we know how to service it.

For more information on how you can streamline your microwave needs, contact M/A-COM MAC, Inc., 5 Omni Way, Chelmsford, MA 01824, (617) 272-3100.



Circle (16) on Reply Card



For Excellence In Antennas

- A complete line of TV and FM Broadcast Antennas
- Modern 7,000 ft. test range facilities
- Innovative Engineering Careful construction
- Two Year Warranty on Product and Workmanship



With over 1500 delivered, we've helped more stations penetrate their market.

FCC Directionals
Pattern Studies
Multi-Station Arrays
Full Scale Measurement

JAMPRO ANTENNAS, Inc.
6939 Power Inn Road
Sacramento, CA 95828
(916) 383-1177 TELEX 377321

master control operator and, in fact, is just what that person should be looking at. However, the list is not nearly as useful to the VTR operator. The automation system should provide a special display, tailored to the needs of the VTR operator, that indicates which machines are in use, which are available, and which need tape loaded or recuing. Similar displays and reports should be available for use by traffic personnel, the videotape librarian and in other departments.

The master control switcher interface

The first and foremost job of a station automation system is to control the master control switcher. This can be done in one of several ways, depending on the switcher involved. Some master control switchers provide an RS-232 or RS-422 serial port (see Figure 1). These

switchers are easy to control, assuming the protocol used by the serial port provides enough control of the switcher. Ideally, all switcher functions that can be controlled from the switcher front panel also should be controllable from the automation port. If this is not the case, the automation system cannot adequately control the switcher, and added manual intervention will be necessary.

Some master control switchers don't have a serial port for automation. These switchers usually are interfaced with a box of relays and opto-isolators that connects into the multiconductor line between the control panel and the electronics (see Figure 2). This approach is more expensive and less reliable than the serial port. The relay box is a potential failure point that doesn't exist with a serial interface. Also, because the relay box is between the control panel and the electronics, relay failure can cause control of the switcher to be lost both from automation and from the front panel, making it impossible to control the on-air signal.

Regardless of the method used to connect to the switcher, the most important element of the master control interface is the automation software. It is imperative that the software fully utilize all of the features of the master control switcher. If the automation system cannot control everything normally controlled by the front panel, important functionality may be lost, and excess manual intervention

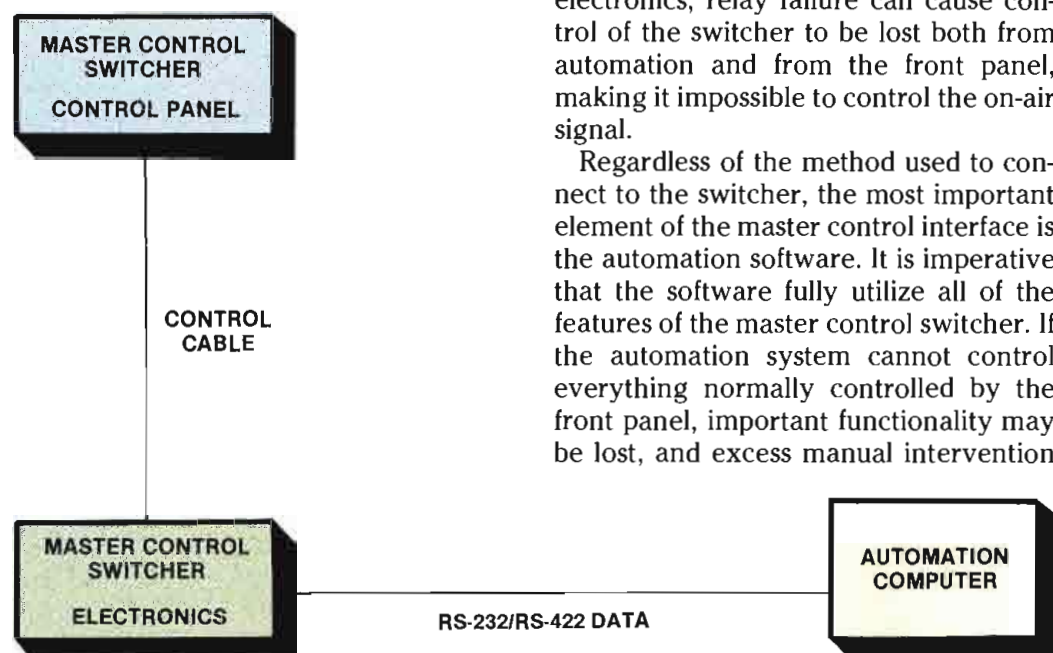


Figure 1. A master control switcher with a serial port is the easiest to automate.


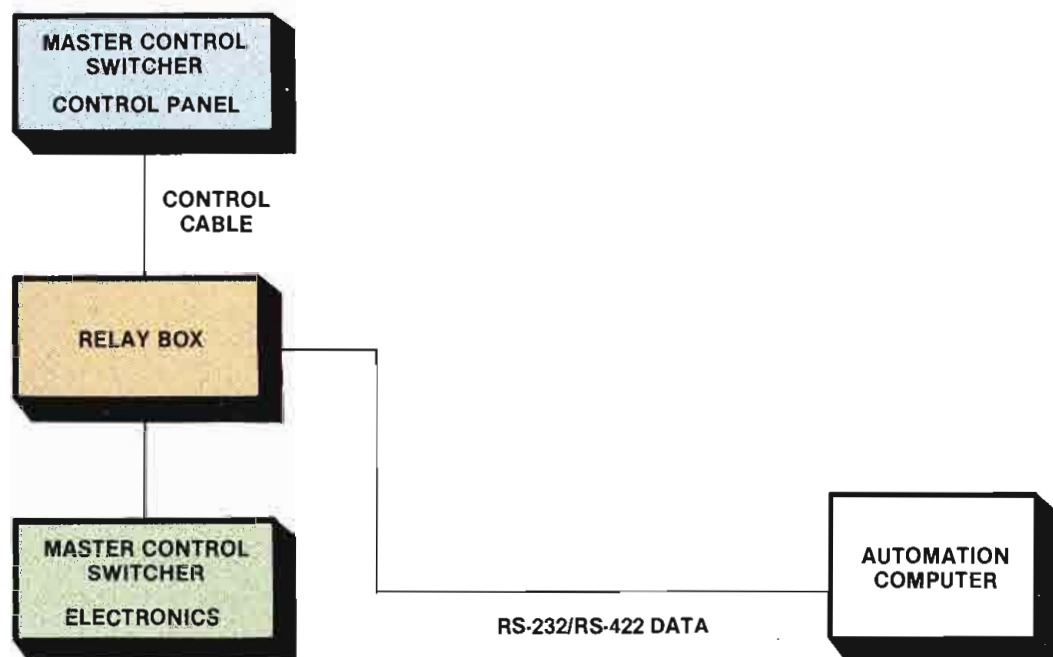


Figure 2. A master control switcher without a serial port requires a relay box.

**NOW!
25 Inputs**

25 x 1 Video/Stereo Audio Switcher

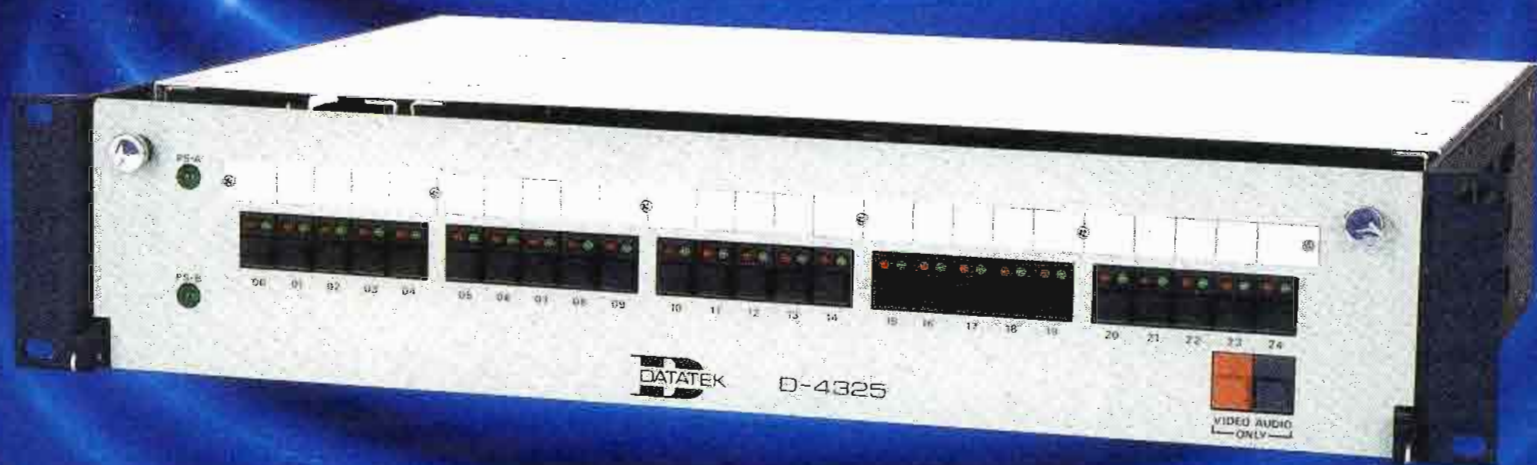

DATATEK

Datatek's new D-4325 Video/Stereo Audio Switcher Features:

- Program line quality video and audio performance
- Two Video and two full performance audio outputs per channel
- Wide Video bandwidth; high audio output level capability
- Video cable equalizing and vertical interval video switching
- Only two rack units utilize optimum space
- Local or remote control panels provide unsurpassed flexibility—remote control over coax line
- RS-232/422 control standard
- Wire per crosspoint and binary parallel port control available
- All control arrangements are fully operable in parallel
- Expansion provisions are included

*For a descriptive
brochure and
further information
call or write:*

DATATEK
CORP.


1121 Bristol Road, Mountainside, NJ 07092
1-800-882-9100 • 201-654-8100 • TELEX 833-541

**WHEN LOOKING FOR THE LATEST TECHNOLOGY
IN UHF AND VHF TRANSMITTERS...**

Comark's recent track record of technological innovations is unmatched by any other US manufacturer. This impressive history of recognized advancements demonstrates our commitment to the future. A commitment backed by continuing substantial investments in research and product development activities.

Incorporating new technology into today's products is your assurance that the Comark transmitter purchased now will still be current in the year 2000.

**COMARK
IS HERE**

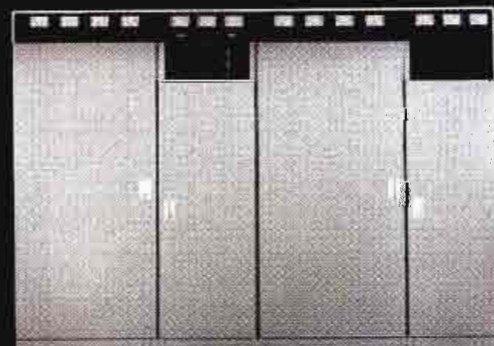

COMARK COMMUNICATIONS, INC.
A Thomson-CSF Company

Route 309 & Advance Lane • Colmar, PA 18915
(215) 822-0777 • Telex: 846075

Circle (19) on Reply Card

www.americanradiohistory.com

BROADCASTING Aug. 18, 1986

"Both COMARK and Thomson-LGT made news at the NAB..."
"COMARK introduced a 60 kw UHF transmitter with a KLYSTRODE..."

"...Thomson-LGT introduced a 30 kw SOLID-STATE VHF Transmitter..."

"Comark...first domestic source for BCD/ABC beam current pulsing systems."

COMARK

LEADING THE INDUSTRY IN TECHNICAL INNOVATIONS

BM/E June 1986 NAB Show-In-Print

"...the principal advance reported at this NAB was the long-awaited commercial realization of the KLYSTRODE TUBE design in a production transmitter from COMARK."

"COMARK is first US manufacturer to build production transmitters specifically designed for and featuring wide band external cavity KLYSTRON amplifiers."

BROADCAST ENGINEERING- May 1986 Transmission Systems Special Issue

"High-performance Klystrons, Klystrodes and solid-state RF amplifiers are reducing operating costs and improving broadcast transmitter quality."

"COMARK was the 1st domestic manufacturer to design and produce no-tuning solid-state exciter/driver for use with Klystron transmitting systems."

may be required.

The machine control interface

The next most important function of the automation system is to control the machines being used on-air. The minimum acceptable level of control is the capability to start machines. However,

the more machine control flexibility a system provides, the more useful it will be. For example, the capability to set a cue point, stop the machine and then to search back to that cue point makes possible the automatic recuing of a machine during a break. This frees the VTR operator from having to recue the

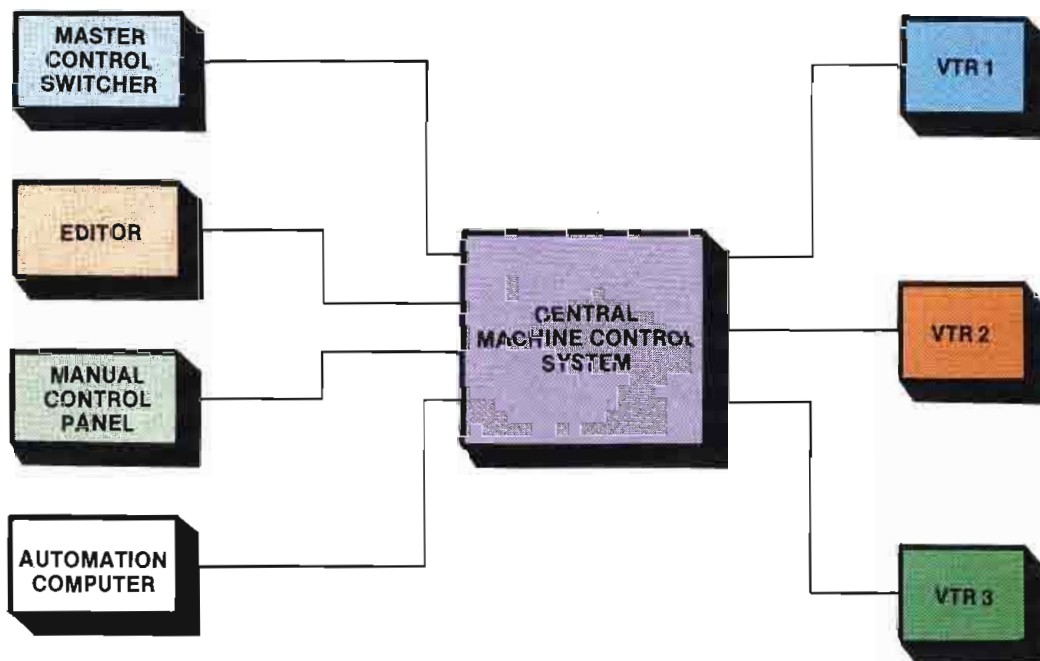


Figure 3. The automation system's machine control must be integrated with the machine control functions of other equipment in the plant.

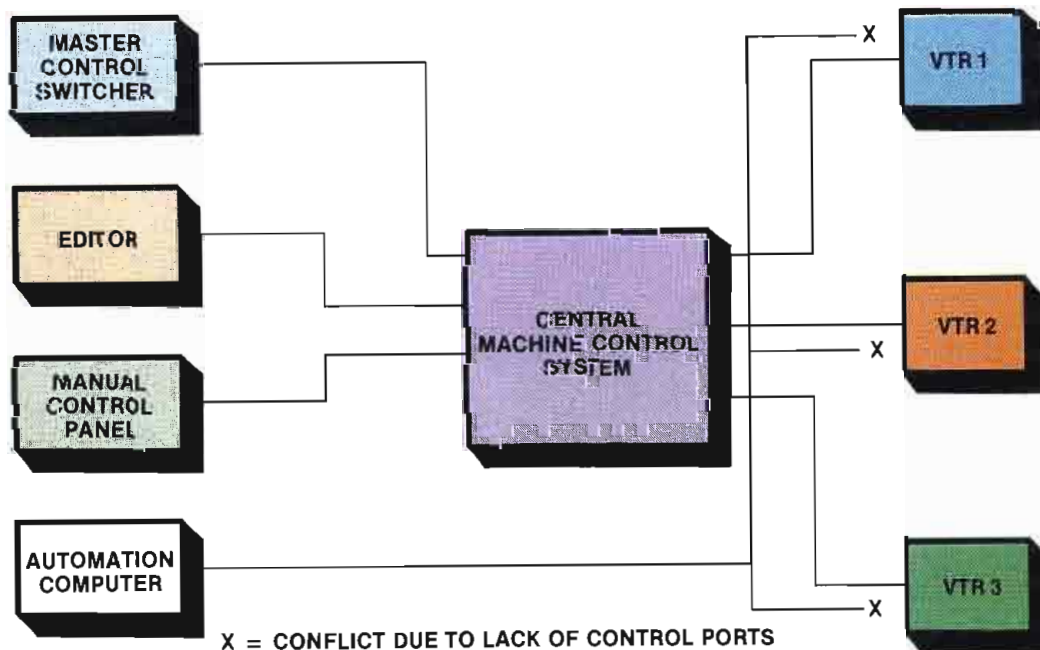


Figure 4. An automation system without a central machine control system requires dedicated machines.

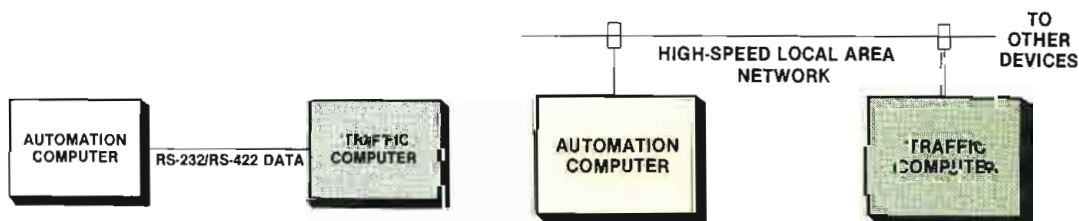


Figure 5. Traffic may be included in the automation system with simple serial interconnection.


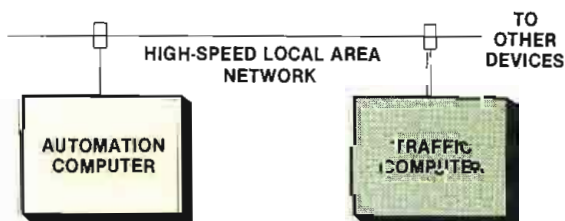


Figure 6. A high-speed network also may be used to interface traffic with automation.

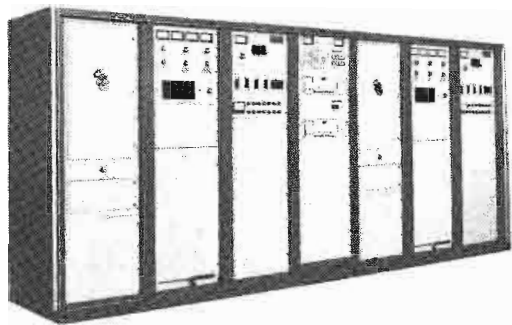

**A First
For The
Industry**

70,000 watts FM

Continental's new 817R-5 combines two proven 816R-5 35 kW transmitters to offer broadcasters many operating advantages. The 817R-5 uses husky components and is built to give many years of dependable service. The first 817R-5 has been shipped to KABL, San Francisco. For product data, call your local Continental Sales Manager.

- SCR power control
- Automatic RF power output control
- Automatic SWR circuit protection
- SWR output power foldback
- Remote control interface
- AC power failure recycle
- Grounded screen amplifier
- 802A exciter

Transmitters: 1 to 50 kW AM and to 70 kW FM, antennas, studio & RF equipment © 1986 Continental Electronics/6322



Continental Electronics

a Division of Varian Associates, Inc. PO Box 270879 Dallas, Texas 75227 Ph: (214) 381-7161 Telex: 73-398 varian



Circle (20) on Reply Card

program machines during breaks.

Another important aspect of machine control is status reporting. An automation system that doesn't check for proper machine status is "running blind" and must assume that a machine rolls when it is told to. A system that observes and reports machine status can warn an operator if a machine fails to roll.

Finally, the issue of machine control integration is important to a TV facility. The automation system's machine control must be integrated with the machine control functions of other equipment in the plant (see Figure 3). For example, the master control switcher must preroll the machines when running manually, editors need to control the machines, and there are usually manual control panels in production control rooms and other places throughout the facility.

If the automation system is not part of an integrated machine control system, it would be difficult to provide the necessary control of the machines from all of the required locations (see Figure 4). This is particularly true with the newer, serially controlled machines. An automation system that uses an existing machine control system is much easier to install and operate than one that provides relay closures to be connected to each machine.

The traffic interface

For an automation system to be fully effective, it must be interfaced to the station traffic or business system so it can receive schedules and return logs without retyping by an operator. This interface can be accomplished in several ways. One way is to use floppy disks or other removable media. Another is to use a serial port such as an RS-232 line between the two (see Figure 5). A high-speed Ethernet-type network also can be used (see Figure 6).

Each of these methods has advantages and disadvantages. The floppy disk or tape method is usually the least preferred because it requires the operator to physically move media and to deal with both computer systems. The network approach is probably the best method because of its speed and reliability, but few traffic systems support this kind of interface.

Regardless of the method used to connect the automation computer to the traffic computer, the interface software makes the difference between a system that is easy to use and one that is not. The automation system should do as much of the busy work of the transfer as possible. The operator should not have to deal with the details of operating either computer to make the transfer. The automation system should extract the information it needs from the traffic

Continued on page 36

NEW DIGITAL BELTPACK featuring R.M.K.*



- ▶ Smaller
- ▶ Lighter
- ▶ Higher Output
- ▶ Electronic Switching
- ▶ Compatible with existing Clear-Com

* Kills all open mics from any remote location.

For more information on new features and models, contact your local dealer or:



Clear-Com
Intercom Systems

1111 17th Street
San Francisco, CA 94107 • 415-861-6666
Export Division: P.O. Box 302
Walnut Creek, CA 94596 • 415-932-8134
Telex: 176340 CLEAR-COM WNCK

Circle (21) on Reply Card

Rapid Transit


That describes Utah Scientific's new SMC-1 Machine Control System. Using our DYNABUS™ High Speed Data Network, it operates at over 50 times the speed of "ES BUS" systems and interfaces to a wide variety of machines—parallel, "Sony Serial," ES BUS, etc.

SMC-1 control panels are modular, allowing you to mix fifteen-function, ten-function, and dual five-function modules. They are also self-assigning so that modules can select any machine by entering the machine name in the display window.

Machine delegation is also provided. It allows the operator to restrict control of a machine to a single control area or to multiple areas.

Perhaps the most important feature is the intrinsic system reliability provided by the DYNABUS network. With fail-safe bus connections and extensive self-diagnostics, and with no central processor as a potential failure point, it is unmatched for safe, dependable control.

Call or write today for more information on the new SMC-1 Machine Control System.

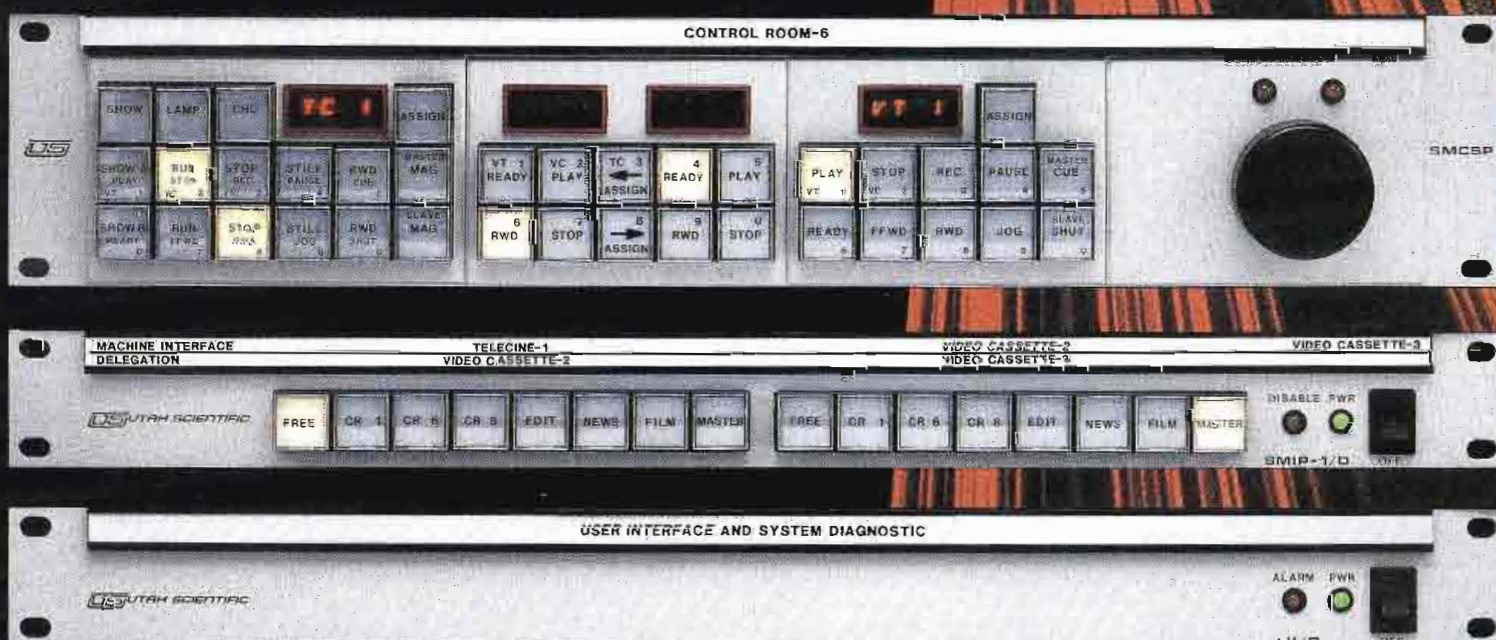

US UTAH SCIENTIFIC, INC.
DYNATECH Broadcast Group

Circle (22) on Reply Card

1685 West 2200 South, Salt Lake City, Utah 84119
(801) 973-6840 · Toll Free 1-800-453-8782
TLX: 269-916 · FAX: 8019730255

Gotcha.

If the price doesn't grab you the features will. But first, let's talk price.

The new Sony BVH-3000 costs about a third less than its predecessor, the BVH-2000. So now you can get true one-inch quality without breaking the bank.

One of the ways we did it was by using Sony-developed LSIs. A breakthrough that not only cuts the number of parts but helps make room for new innovations.



Like a revolutionary air threading system that automatically takes the @#!\$#!! out of tape handling. An easy to use color framer. And a built-in TBC with a choice of two low-cost, high-performance processor boards.


Of course there's more, but the big news is that you pay less. For the full story, get a hold of your Sony Broadcast representative. Or call Sony at (201) 833-5231.

SONY®
BROADCAST

Circle (23) on Reply Card




The very best at producing nothing.

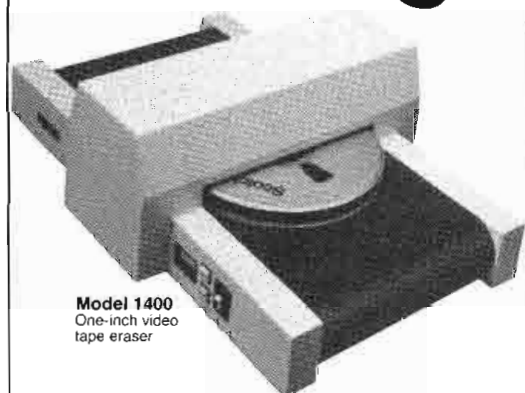

Garner outperforms all others in depth of erasure, speed of operation, dependability and durability. That's why the top professionals of the AV industry select Garner.

To find out more about what thousands of tape specialists already know, write or call our toll-free number for a free brochure.

Model 105
Audio and
computer tape
or disc eraser

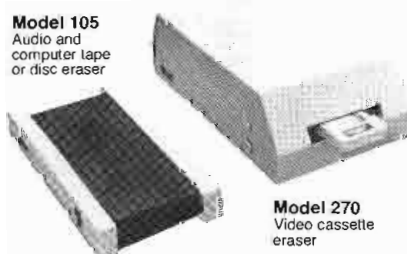

Model 270
Video cassette
eraser

Toll-Free 800-228-0275

garner industries

4200 N. 48th Street/Lincoln, NE 68504
(402) 464-5911/Telex 438068

Continued from page 32

log, ignore any unneeded information, and ask the operator for any essential information that is not present.

The storage capacity of the system is another factor to consider. It is desirable for the automation system to store several days worth of schedules and logs so there will be a backup in the event of a traffic system failure. Many stations keep a skeleton schedule in the automation system for a full week. This skeleton is a typical schedule for each day of the week, and can be edited manually if the day's actual schedule is not available from the traffic system.

Storage of logs allows as-run logs to be

saved until the traffic system is operating again. The alternative is to manually enter logs into the traffic system from the printed listing. Considering that most traffic personnel do not work weekends or holidays, this storage capacity can be a real asset when no one is in the traffic department.

The automated cart machine interface

In the last two years a new breed of automated cart machine has been introduced. These machines can do more than those of the past and it is essential that an automation system take advantage of these capabilities. A system should be capable of interfacing to these

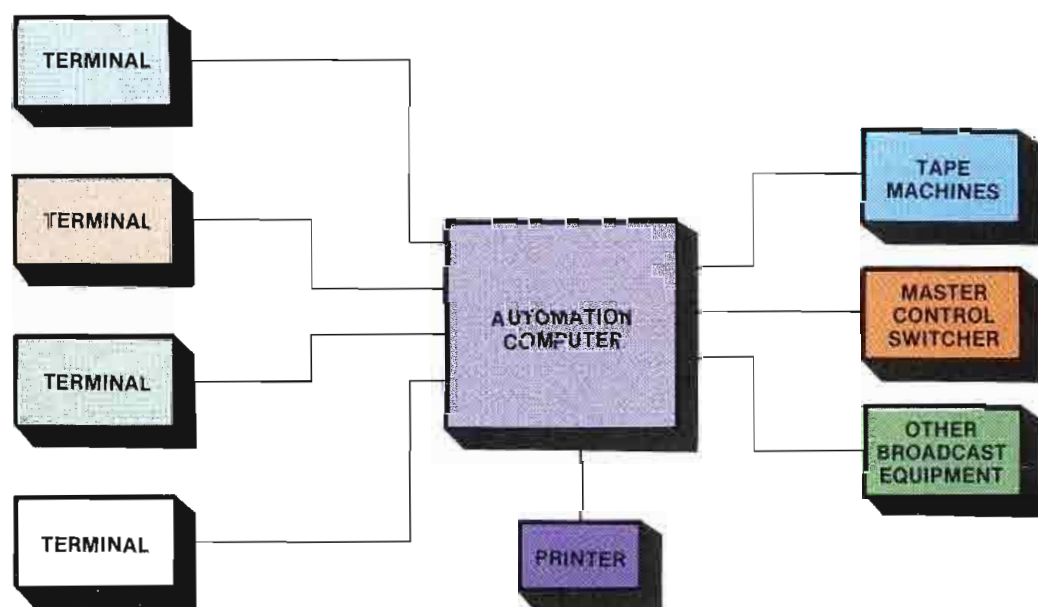


Figure 7. Some systems use a central CPU and remote terminal hardware configurations.

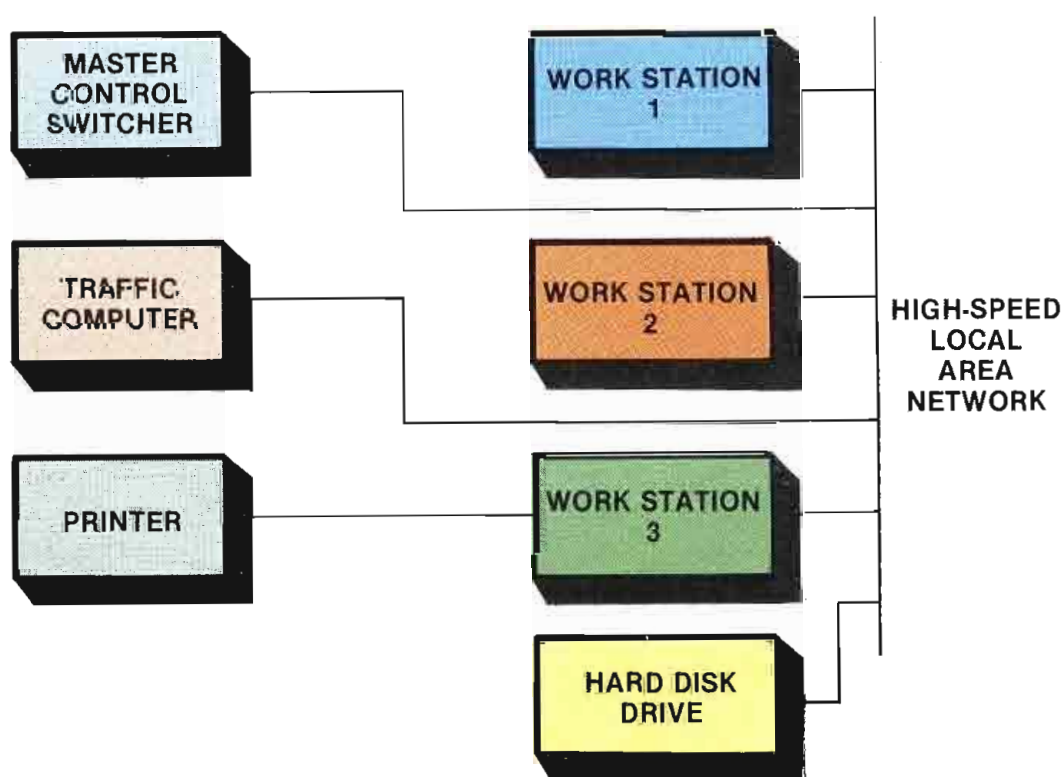


Figure 8. The traditional network-based hardware configuration approach.

Circle (24) on Reply Card

Top Notch for Your Bottom Line

A top-notch performer, the new Studer A807 has the features and sound quality you need for demanding production applications. And, as the lowest-priced Studer, it also looks good on your bottom line.

The Fruits of "Trickle-Down" Technology. Over the past five years Studer has developed a whole new generation of micro-processor-controlled ATRs. Now, with the A807, budget-minded pros can find this new technology in a compact, ingeniously engineered package.



A Summary of Top-Notch Features:

- Digital setting and storage of audio alignment parameters
- Tape shuttle wheel
- Zero locate, autolocate, start locate, and loop functions
- Multiple timer modes
- Programmable keys for additional locator addresses, fader start ready, or lifter defeat
- Backspace (momentary rewind to play), library wind, varispeed, and reverse play
- Three tape speeds
- Microphone input with phantom powering
- Complete monitoring facilities
- RS 232 port for external computer control
- ...and the list goes on!



Sonically Superior. For superior high frequency dynamics the A807 audio electronics incorporate advanced phase compensation and Dolby HX Pro.™ You won't sacrifice the top end of your sound to enjoy a great bottom-line price.

Tough Stuff. The A807 is 100% Studer, with a die-cast chassis and head-block, rugged AC spooling motors, and a new brushless DC capstan motor. Manufactured with Swiss precision, this ATR is designed to get the job done faithfully—even in adverse outdoor remote assignments.

Suit Yourself. The rack-mountable A807 may be ordered with optional wooden side panels and handles, or in a roll-around console with padded armrest. A wide range of remote controls and options make it suitable for practically any application.

To find out more about this new top-notch performer, call or write for complete information and the name of your nearest Studer Professional Products dealer.



STUDER REVOX

STUDER REVOX AMERICA, INC.
1425 Elm Hill Pike, Nashville, TN 37210 (615) 254-5651



The ENG-4 Receiver is supplied with a small monitor earphone and a 1/4 wave antenna that mounts vertically or at a right angle.

It's a small wonder!

Big FOUR CHANNEL receiver and TWO CHANNEL transmitter packed into the smallest packages ever.

The system is designed for ENG broadcast and remote video production and operates in the VHF band between 165-216 MHz. There are 14 standard computer selected frequencies available from Telex. The receiver's simple rotary dial allows quick channel changes in the field. Spring-loaded battery compartment pops up so battery "sled" can be taken out and replaced instantly with a spare—reducing battery change downtime to just seconds. For more information on this "small wonder" write or call today.



ENG-4
Antenna can
be mounted at
a right angle

WT-400
is supplied with
belt-pack carrying
case not shown
here

ENG-4

WT-400

TELEX®

TELEX COMMUNICATIONS, INC.
9600 Aldrich Ave. So., Minneapolis, MN 55420 □ (612) 887-5550

machines serially and directly downloading schedules and play lists into them. Information about machine status and carts not present should be reported back to the automation system and, in turn, back to the operator. Play lists should be updated automatically when the schedule is edited at the automation system. Ideally, the only operator interface to the cart machine would be to load or unload carts as instructed by the system.

The automation hardware

Because computers have changed so much in the past five years, so should the computer hardware used for automation systems. It is important that automation systems use modern hardware with an up-to-date design. For example, hard disks have become reasonably priced, and an automation system without a 50Mb to 100Mb hard disk may not have sufficient storage capacity for the needed schedules and logs. Eight- and 16-bit processors have been replaced by 32-bit machines, which are much faster and, often, no more expensive. It also is important to have sufficient memory in the system to store current lists and schedules.

In general, evaluate the hardware being used in the same way you would any other computer equipment purchase and don't settle for hardware that you wouldn't buy for general use.

The computer should use a standard, industry-recognized operating system. Examples include UNIX, VMS, MS-DOS and several others. Automation systems that do not use a standard operating system are difficult to modify and maintain. If the utilities for maintaining the computer system are missing, disk backups and other similar functions will be difficult. These utilities always are present with standard operating systems, but usually are missing otherwise.

A final and important consideration is the hardware configuration. Some systems use a main CPU and remote terminals (see Figure 7). Others use remote work stations, tied together by a network of some kind. At first glance, the network approach seems to be more reliable, but may not be. The reason is that, generally, the master control switcher is connected to one work station, the traffic system to a second, and system printers to a third (see Figure 8). This means that if the work station controlling the master control switcher fails, the system is down and the other work stations don't do any good.

Similarly, if any one of the others fails, the functions associated with that work station are lost, and the other work stations can't replace them. Also, the hard disk has to tie into the network, and wherever it ties in is a potential severe failure point. Without the hard disk, the

Circle (26) on Reply Card

PHASE TRAK 90TM

The Stereo Solution for Every Cartridge



Continuous
Electronic
Phase
Correction




The PHASE TRAK 90's LED "phase eye" display shows phase correction activity as it happens.

Just imagine: A cartridge machine that could automatically correct phase errors in the playback audio of any cartridge—regardless of what equipment was used to record it originally. No encoding. No matrixing. Just instant, accurate phase correction every time a cartridge is played.

Sound impossible? Then meet the new PHASE TRAK 90 from Broadcast Electronics!

At the heart of the PHASE TRAK 90 is a revolutionary non-encoding phase correction circuit. (Patent pending.) Whenever a cartridge is played it continuously checks and corrects the phase relationship of the right and left channel playback audio.

But phase correction is only one of the unique features of this new machine. The PHASE TRAK 90 also offers built-in, non-encoding noise reduction, an FSK decoder, digital cue detection, automatic "hot tape" sensing, an optional timer and more. Its superb signal to noise and frequency response characteristics ensure audiophile performance with every cartridge.

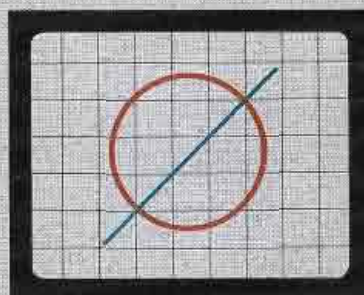

Red circle: Typical Lissajous pattern, right and left channel audio 90 degrees out of phase.

Green diagonal: Typical Lissajous pattern after PHASE TRAK 90 phase correction. Right and left channel audio in perfect phase.

Contact your Broadcast Electronics distributor today or call:

217-224-9600

PHASE TRAK 90TM is a trademark of Broadcast Electronics




**BROADCAST
ELECTRONICS INC.**

4100 N. 24th ST., P.O. BOX 3606, QUINCY, IL 62305-3606, (217) 224-9600, TELEX: 250142
Circle (27) on Reply Card

www.americanradiohistory.com

DATUM 5300 ITP

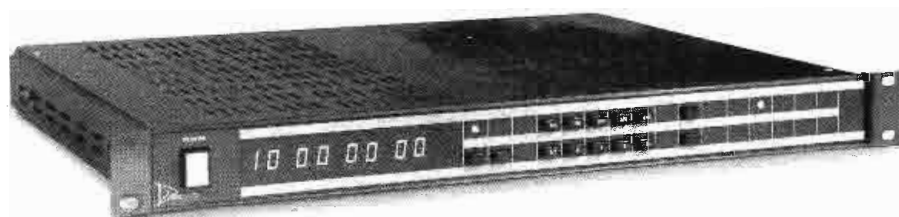

Intelligent Time Processor

The 5300 ITP provides SMPTE/EBU time code support for any video application. The unit is expandable, with configurations ranging from a basic LTC reader/generator to a full-function processor with VITC and character insertion.

- Microprocessor Based
- NTSC and PAL Formats
- Dub or Jam Sync Modes
- Parallel BCD Time Outputs
- User Bit Outputs
- Character Inserter Option
- VITC Reader/Gen Option
- Expandable Design
- Low Power Requirements
- Compact, Modular Design

For more information on this and other DATUM video products, call or write.


datum inc Timing Division

1363 S. State College Blvd., Anaheim, CA 92806-5790
(714) 533-6333

Circle (28) on Reply Card

SMPTE/EBU Time Code Reader & Character Generator

Model DR-107B

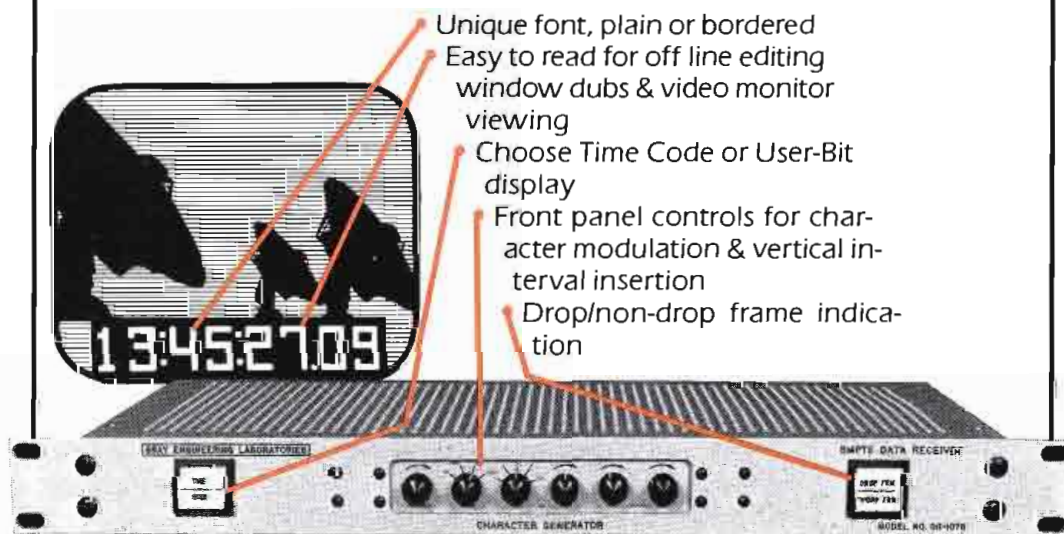

GRAY ENGINEERING LABORATORIES
504-P West Chapman Avenue
Orange, CA 92668
714-997-4151

- Superior code reading using "The McFadin Window®"
- Reads 1/100 to 100 times play speed (machine dependent)
- Restored Time Code output for dubbing
- Parallel BCD output
- 1 3/4" Rack mounting
- 5-Year warranty including parts and labor

Circle (29) on Reply Card

system is down.

Finally, any work station can take the network down, again shutting down the system. It is possible for a networked system to increase the number of failure points rather than decrease them. This can be prevented by proper network design, by making the master control switcher and the disk drives actual network nodes instead of connecting them to a work station (see Figure 9). So far, however, this approach is not well supported.

Large computers and operating systems often have difficulty executing events with split-second accuracy. They often are supplemented by a small computer running some kind of a real-time executor, usually locked to a house master clock system (see Figure 10). The main computer sends events to the small one ahead of time, and the small one actually executes them. This can substantially increase switching accuracy.

In general, be sure the hardware architecture used makes sense, has a minimum of failure points, and features sufficient memory, CPU, disk and operating system capacity for your application.

Automation system software

An automation system's software is what makes it operate. It must be properly written and documented. Nearly all modern automation systems are written in the C programming language. This language is powerful and it is structured, meaning that it encourages good programming practices. It also is extremely transportable and available on nearly all machines. An automation system written in a simple language, such as Basic, or in assembly language is not likely to provide the power and flexibility required.

Be sure to find out about software update policies. Software always contains bugs, and the manufacturer should be willing to provide new releases and updates of the software as the bugs are fixed and new features are added. Know the policies of the vendor on new software releases. Some do not provide any ongoing releases; others provide them regularly; and some offer updates as part of a maintenance agreement at an additional cost. Make sure that you know the details of what you do and do not get with your system.

Controlling the rest of the station

All automation systems control the on-air signal. Most provide some additional features. An automation system that can control your central house routing switcher and start and stop your machines can take care of recording incoming feeds, playing back tapes for outgoing feeds, dubbing, network delays and many other routine tasks. It is desirable to maintain these events in a

The Abekas A53-D Digital Special Effects System

The innovative tradition of Abekas continues with the A53-D—the most cost-effective, high-quality three-dimensional effects system available today.

In single or dual channel configuration, the A53-D gives you a full array of three-dimensional features. This includes: perspective and 3D rotation, variable rotation axes and 3D locate, field/frame freeze and full manipulation of frozen pictures, variable border and background, crop and aspect change, A/B switch-

ing and GPI control, and smooth linear motion and trajectory with variable tension.

The A53-D makes good sense for both live broadcast and post-production applications. For broadcasting, the A53-D offers a simple-to-use control panel with fast access to 24 on-line effects. For post-production, the system's extensive programming features and precise control let you create intricate effects limited only by your imagination.

You can digitally interface the A53-D to the highly acclaimed Abekas A62 digital disk recorder.

This unique duo gives you the ability to composite unlimited layers of manipulated video without generation loss.

Let the A53-D add a whole new dimension to your bottom line, with unmatched price and performance. For details, contact: Abekas Video Systems, Inc., 101 Galveston Drive, Redwood City, CA 94063. (415) 369-5111.

Abekas

Video Systems, Inc.


Now Anything is Possible

ADD NEW DIMENSION TO YOUR BOTTOM LINE



Circle (30) on Reply Card

www.americanradiohistory.com

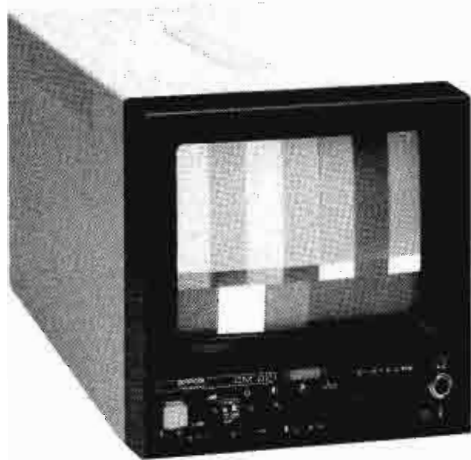

Compact. Professional. Full performance 9" color monitor

The CM 22 from Barco Industries is the only full performance, 9" monitor with color temperature and black level stabilization, plus RGBS, as standard features. It's also portable, and can be line or battery operated. So, it's equally at home in the studio, out in a network van or at a local shoot.

Typical applications include previewing of video sources; combined data and video requirements (RGB fast insert); and ENG, EFP or other outside uses where high quality and compact size are important.

- High resolution
- Composite video and RGBS inputs
- Preset front panel controls for hue, brightness, chroma and contrast
- Automatic Kinescope Biasing (like our most expensive master monitors) for color temperature and black level stability
- Comb filter, switchable to notch
- AC or DC operation (12 VDC)
- Built-in speaker
- Blue only, pulse cross, underscan and other standard broadcast monitor features
- Modular, all active and passive components on plug-in boards

For complete details, contact your local authorized dealer or Barco Industries, Inc., 170 Knowles Drive, Suite 212, Los Gatos, CA 95030. Phone: (408) 370-3721.

BARCO INDUSTRIES INC.

BARCO INDUSTRIES, Inc. is a member of the ACEC group. © Barco Industries, Inc., 1986

Circle (59) on Reply Card

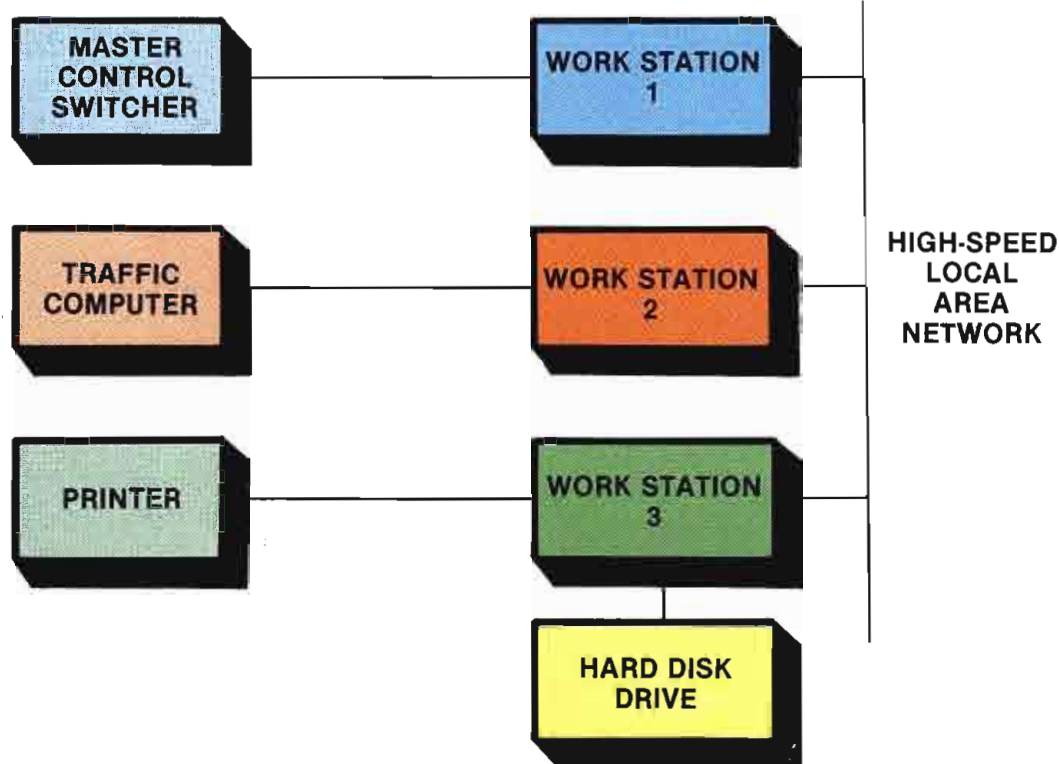


Figure 9. An alternative to the traditional approach has fewer failure points, but is not as well supported.

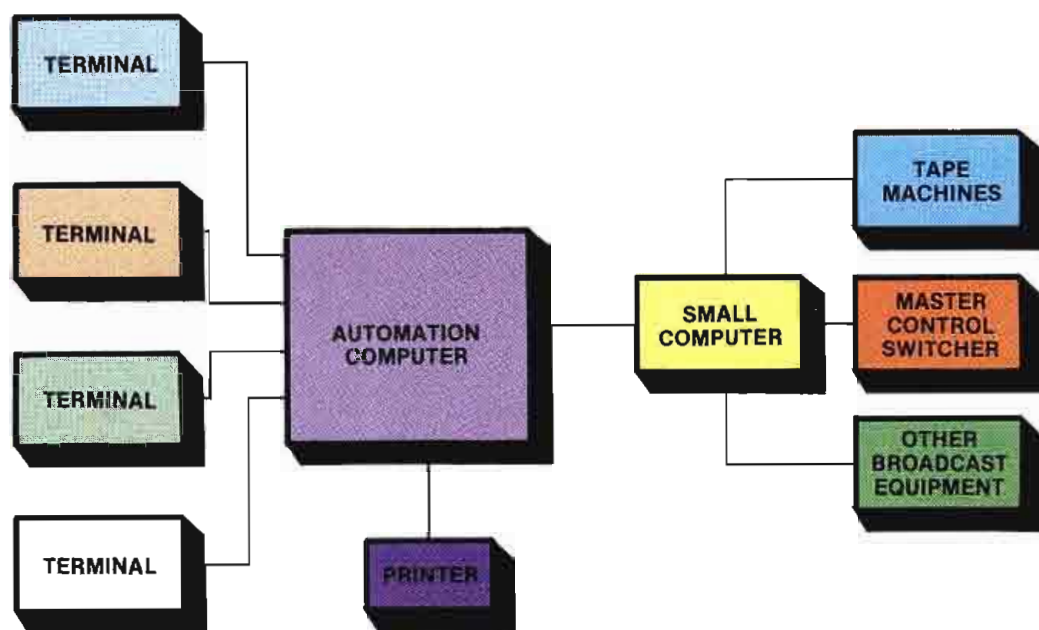


Figure 10. A small computer locked to the master house clock can increase switching accuracy.

separate schedule from the on-air events so that they don't get in the way of the master control operator. The maintenance of separate schedules also protects the on-air events from someone who is editing the non-on-air schedule. These facilities can be extremely useful and, in fact, some stations have purchased automation systems just for these features, and do not control their on-air feed from automation.

Know what you're getting

A modern TV automation system can

be a great asset to your facility. It can help to increase efficiency, limit make-goods, and to improve switching precision. It can assist operators and allow them to more ably do their jobs. However, there is a wide range of features and quality available, and often price has little to do with system quality. It is important for you to know what you are getting, confirm that it meets your needs, and then properly install it and integrate it into your operation. By doing this you can ensure the maximum benefit from your new automation system. I:-7-)))))

Today's tougher audio requirements
demand a new choice

Telex *Pro Series* 6120 XLP

A new duplicator with 8X speed
and tougher specs.

Improved frequency response plus less distortion and crosstalk are just a few of the technical gains achieved in the new Telex Pro Series duplicator. This means that you'll make duplicates that are **true to the master** than with any comparable tape duplicator on the market today.

Yes, here's a system with all the advantages of the famous 6120 high speed duplicator plus enhanced specifications. Features that made the 6120 popular such as compact size, unlimited expandability, track select, audio level monitors and easy one-button operation remain distinct Telex advantages. But, by developing the 6120XLP with 8X speed, Telex gives you the advantage of improvements in many **important professional specifications** such as distortion, frequency response, speed accuracy and crosstalk. And, the new cassette transport speed allows you to duplicate directly from 15 ips open reel masters for the ultimate in quality and convenience.

The Pro Series 6120 uses a newly developed, highly effi-



New XL LIFE cassette head.

cient **XL LIFE™** cassette head featuring ultra-hard physical characteristics for **extra long life** (10X normal) plus a satin smooth surface that resists excessive oxide build-up preventing the need for frequent maintenance. Its advanced engineering, precision design and painstaking manufacturing techniques contribute immensely to the Pro Series improved specs including an **unmatched frequency range** of 50 to 13KHz. For further technical details and the name of your nearest 6120 dealer, call or write Telex Commu-

tations, Inc., 9600 Aldrich Ave. So., Minneapolis, MN 55420.

Up to 12 months to pay with no interest!

The entire Telex 6120 duplicator series is available with special **NO INTEREST** financing through participating Telex dealers. Yes, with only 10% down and up to 12 months to pay, you could be eligible for special **NO INTEREST** financing. Think of it! You could pay for your 6120 out of the savings or income generated.



TELEX®

Call Toll Free in U.S. 800-828-6107 • In Minnesota Call (612) 887-5531

Circle (31) on Reply Card



Serial data control systems

By Waldemar S. Wisniewski

Here's a guide to popular serial data communications for remote-control applications.

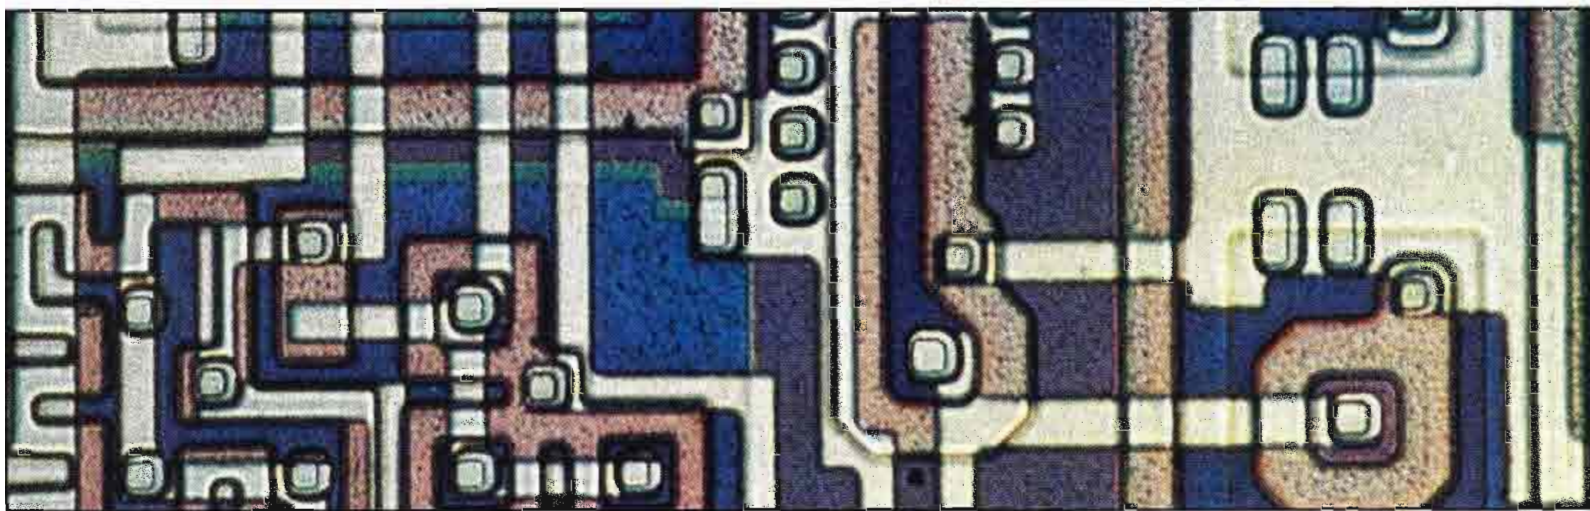


Photo by Timothy Scheffer

Integrated circuit technology is pushing the broadcast industry ahead in ways that would have been considered only science fiction a decade ago. A key element in this technological revolution is exchange of data between separate controllers and source machines.

Traditionally, the broadcast industry has controlled video and audio cross-point matrices by means of single line control schemes using familiar wire-per-crosspoint control panels. As switching systems become larger, or smaller switchers are incorporated into an integrated switching network, the wire-per-crosspoint approach becomes unacceptably complex.

The current proliferation of microprocessors and affordable personal computers has allowed the manufacturers of switchgear components to use digital computers to control the actual cross-point operations of a large switching system. However, because the crosspoint array may be separated from the actual control site by a distance of many meters, a means of communicating between the switching matrices and the control console must be developed. Before control techniques can be explored, the meaning of *digital communications* must be explained.

Digital data

Digital data are derived from the binary system based upon a state that is either on or off. Each element of this binary system is termed a *bit*, and has a

state signified as 1 for on or 0 for off. As with any numbering or communications system, several basic elements must be combined to make meaningful data terms. The most common arrangement of bits in a digital system is a collection of eight bits to form what is termed a *byte*. The byte is the most easily handled data packet in most computers and has become the de facto standard of the digital communications and control field.

The position of each bit within a byte is significant to the meaning or value of the byte. According to convention, when the elements of a byte are listed, the *least significant bit* (LSB) is written on the right, as shown in Figure 1. The bit positions gain place-holder values in powers of two in the same manner the digits in the familiar decimal system gain in powers of 10.

The effective value of the digit can be determined by adding the place-holder values of all digits that are 1s. There are two notable exceptions to this rule. In systems that support negative numbers, the *most significant bit* (bit 7) indicates the sign of the byte; a 1 indicates a negative value. In this case, the remaining seven bits indicate the actual value in a *twos complement* form. In this convention, the equivalent positive value of the byte is complemented (1s are set to 0s, and 0s set to 1s) and 1 is added to the


result to form the byte representing a negative number. This gives a numeric range of -128 through $+127$ (an unsigned byte ranges from 0 through 255).

The second significant exception to the meaning of bit positions in a byte is the convention of encoding text-type data into a binary format. This encoding follows the ASCII (*American Standard Code for Information Interchange*) standard established by the EIA (*Electronic Industries Association*). In this convention, each distinct pattern established by the least significant seven bits represents a specific character or control function. The eighth bit is often used as a *parity* bit for error detection, which is discussed at another point in this article.

It is frequently convenient or necessary to combine bytes to form larger numbers. Two common combinations are encountered. The 16-bit result of combining two bytes is termed a *word* with an unsigned range of 0 to 65,535, or a signed range of $-32,768$ to $+32,767$. When four bytes are combined, this forms the 32-bit *long word* with an unsigned range of 0 to 4,294,967,295 or a signed range from $-2,147,483,648$ to $+2,147,483,647$.

Because writing eight digits to represent each byte becomes tiresome and confusing, the use of base 16 (the hexadecimal system of 0 to 9, A to F) often is

Wisniewski is senior design engineer at HEDCO, Grass Valley, CA.

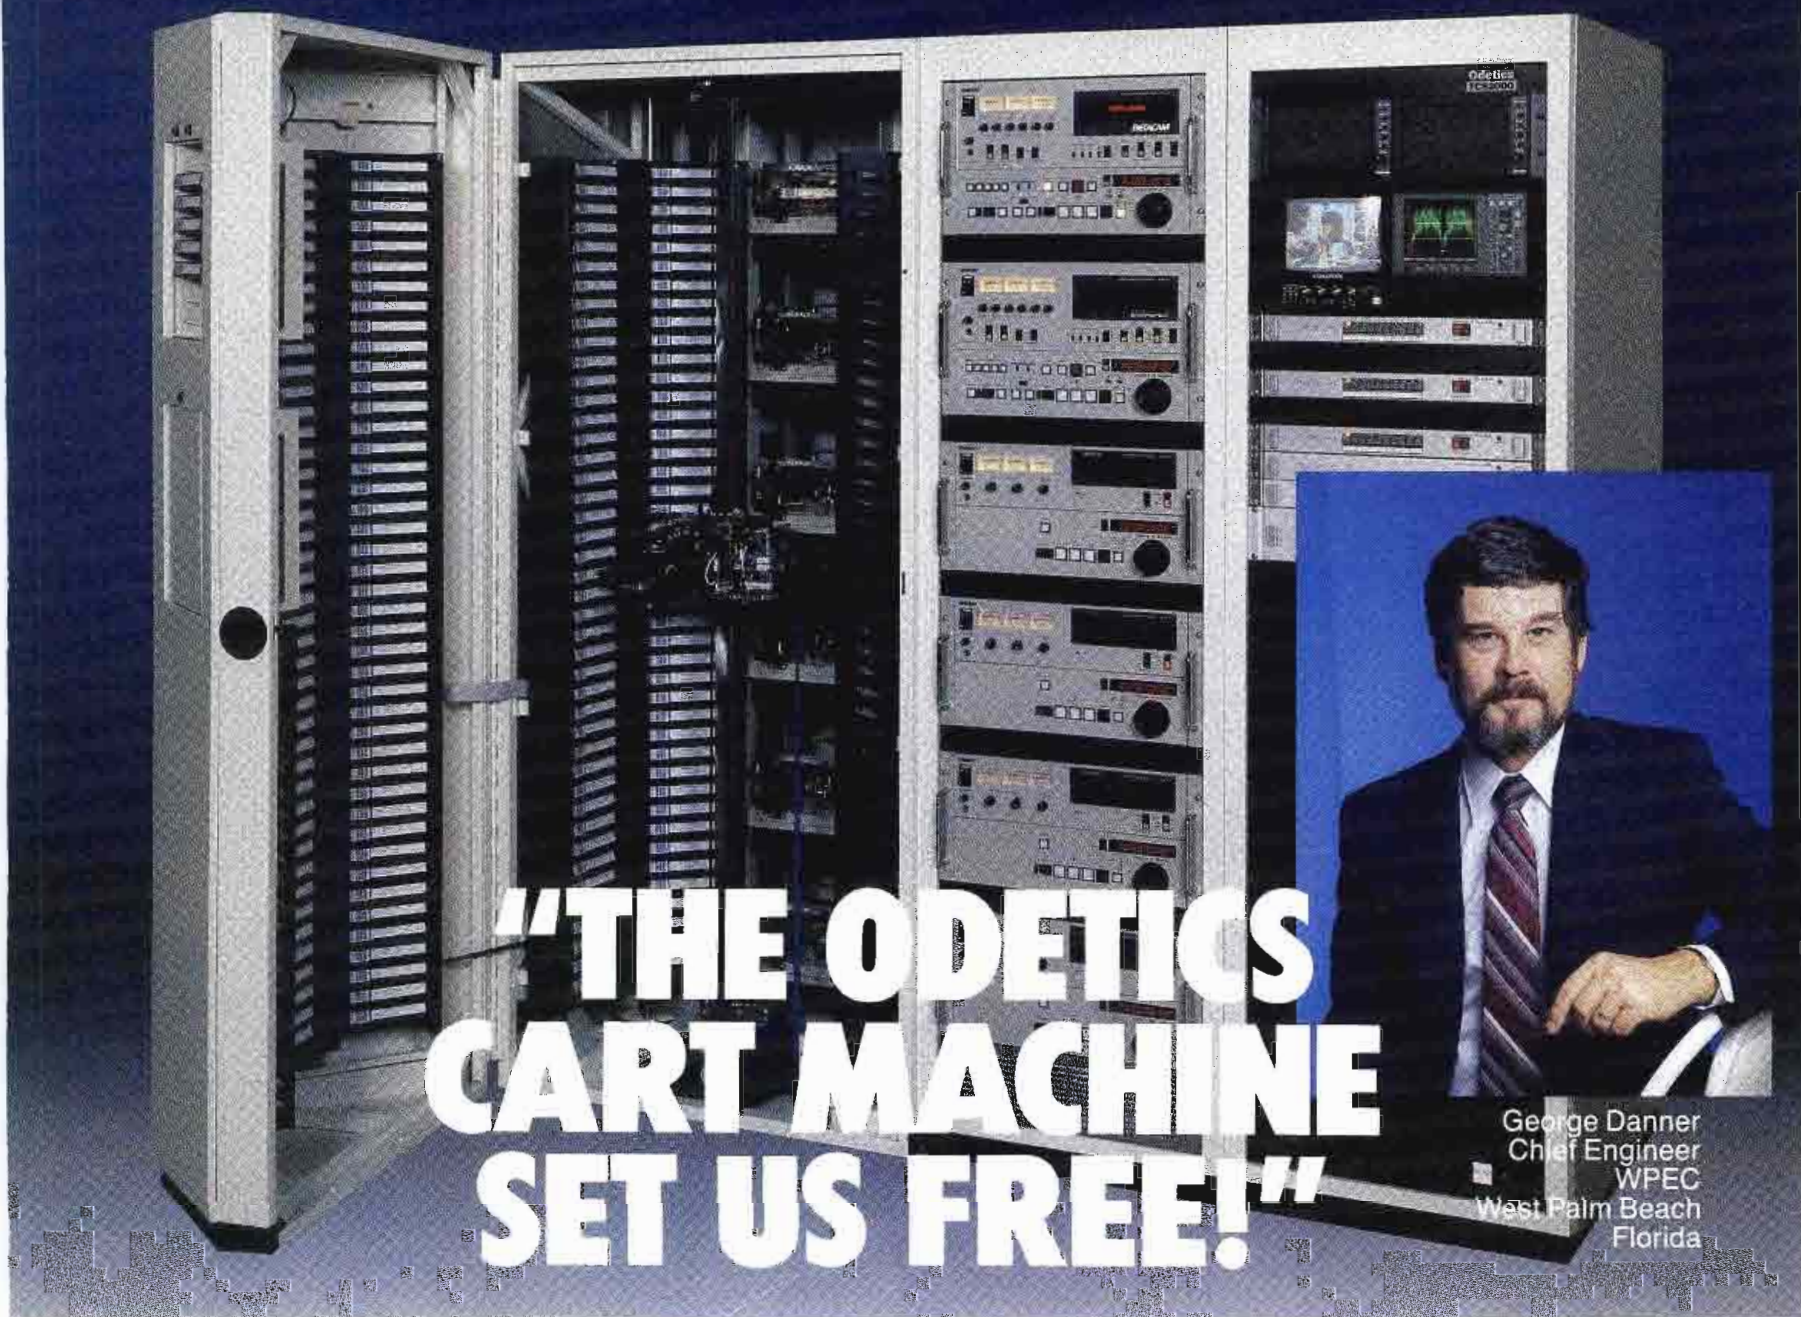

"THE ODETICS CART MACHINE SET US FREE!"

George Danner
Chief Engineer
WPEC
West Palm Beach
Florida

Now that the engineers at WPEC are free from the routine of continually handling carts, they have more time to be engineers.

As George explains:

"We air about 300 to 450 carts per 24 hour period. Before we installed the Odetics Cart Machine, our engineers had to devote a better part of their shift to filing carts and monitoring the programming system. With the Cart Machine working for us, we spend a lot less time handling carts. It means that for the first time we're free to keep a closer watch on station operations and attend to other responsibilities."

The Cart Machine can automatically manage, record and play-to-air all forms of spots and programs. Besides reducing cart handling time at WPEC, The Cart Machine's reliability allows the station to operate without dub reels. The Cart Machine even makes it simple to air the new 10 and 15 second spots.

Transfer of the daily program schedules from the traffic department is smoother because the Cart Machine interfaces with traffic computers and automatically downloads the schedules. Armed with a 65,000 cart database and 1,600 event look-ahead feature, The Cart Machine can automatically preplan spot play lists hours or even days in advance of airing.

The Cart Machine is available in your choice of small formats.

Call now and start streamlining your station operations with The Cart Machine.



The Cart Machine from Odetics

1515 S. Manchester Ave.
Anaheim, CA 92802-2907

Call toll free 800-243-2001
In California call 800-238-4422
or 714-774-2200

employed to represent the bits into groups of four (called *nibbles*). In this way, a byte can be written with two hexadecimal digits, a word with four, and a long word with eight.

Parallel data transmission

Originally, the transfer of digital data was performed in a parallel manner. In this transmission format, all bits of a data packet are presented to the target device at the same time with control lines used to indicate the presence of the data packet and the direction of transmission.

This technique is inherently efficient and fast and is the transmission format of choice within computer and microprocessor systems. A parallel transmission scheme allows the system to determine the address of the data or unit of interest, the actual data or command involved, and the function required within one operation whose time period is often less than 1 μ s.

The efficiency and speed of a parallel system is not obtained without penalty. The primary objection to using a parallel approach in remote control is the

number of wires required to effect the system. A typical microprocessor bus may need 50 to 100 or more wires to operate. Even simple and less efficient schemes require a minimum of 16 wires. When the installation of cables of 25 or more pairs is considered, a parallel system rapidly becomes cost-ineffective if several remote-control sites are needed. Even if cable costs were ignored, the operational speed of today's processors severely limits the distance over which parallel systems can operate.

The reliable operational distance of a typical microprocessor bus system is measured in centimeters due to the transmission line and delay requirements encountered at these speeds (some systems operate at up to 10 million data transfers per second). Even the popular IEEE-488 GPIB (*general-purpose instrumentation bus*) is not reliable beyond 10 meters and still requires the use of a 24-wire cable.

Serial data transmission

The need of the broadcast industry to remotely control switching systems is accommodated by the use of serial data transmission. Serial data transmission is accomplished by presenting the data to the target one bit at a time until all the data have been transferred. This technique, originally developed for the teletype communications network, is similar in approach to the telegraph systems of the 19th century. Each databit is presented in its own time slot, and when all bits composing the desired data packet (most commonly a byte) have been received, the data packet is processed by the target in the normal parallel mode.

The major advantage of this approach is that the communication system requires few wires to implement (typically two wires with a maximum of eight in an extremely high-speed system). This is a boon when a major installation must be cabled.

The main drawback in a serial data transmission system implementation is the time required to assemble the received bitstream into a meaningful packet. Some of the faster systems typically operate at one million bits per second. Many more commonly used applications reach only 1,200 or 9,600 bits per second. Although this loss of efficiency is equivalent to two orders of magnitude as compared to parallel systems, serial transmission overcomes this loss in the distances over which the system can be applied.

Even the simplest systems routinely operate over a distance of 100 meters, while sophisticated systems can operate over several kilometers. It is this effective operational distance, coupled with the reduced cabling costs, that make a

Main story continues on page 52



Presents The Moseley PCL-606/C

Totally Transparent


You're scrupulous about quality. You're running compact discs mastered on digital equipment. You've bought the best console you can afford. Your processing equipment is state-of-the-art. Your RF plant is clean as a whistle. Don't compromise now! Deliver your signal with the only STL that's totally transparent. The composite stereo PCL-606/C. Or the mono PCL-606. Find out why Moseley STLs outsell all others in every major market. For best service and price call.

TOLL FREE ORDER AND
INFORMATION NUMBER
1-800-426-8434



BROADCAST • SUPPLY • WEST
7012 • 27th St. West • Tacoma, WA 98466 • 1-800-426-8434

Circle (33) on Reply Card

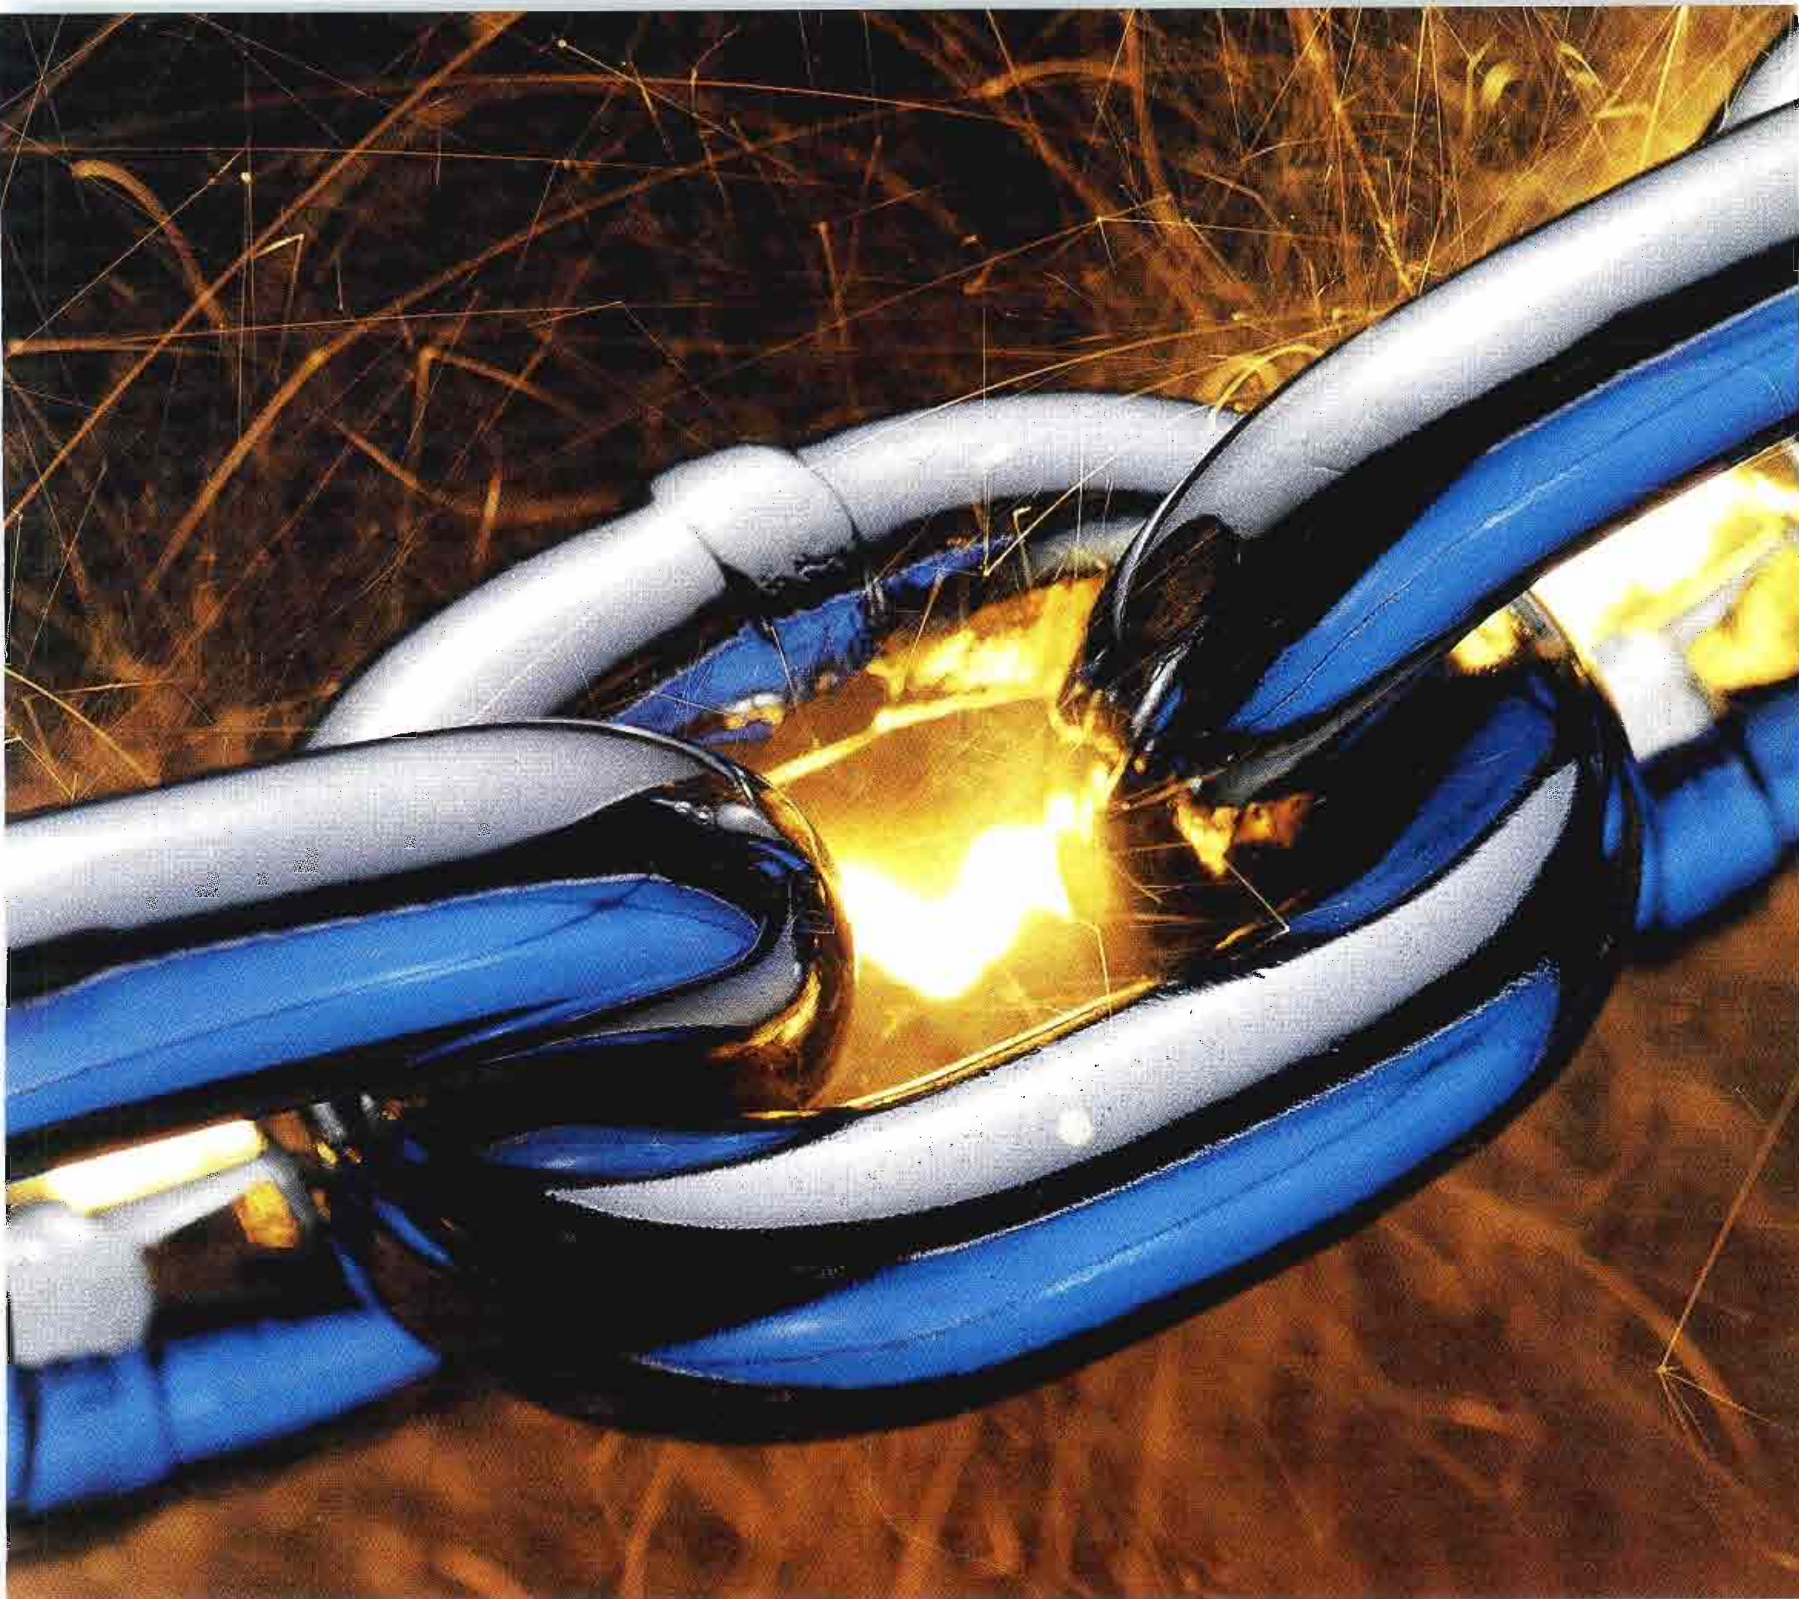

BTS Forges A New Link *to its chain of switcher products*

BTS forges a new link to its chain of distribution switching equipment by introducing the most advanced television automation system available today.

This BTS system gives you total automated control combined with ease of operation by using state of the art computer technology.

The new BTA-2300 automation system, the TAS/TVS-2000 Distribution Switcher, the MCS-2000 Master Control Switcher and TCS-1 Machine



Control link directly to your existing equipment, eliminating the need for non-standard control systems, special interfaces or custom black boxes.

WGBH-TV, PBS, the Armed Forces Radio & Television Service (AFRTS) and over 2,000 other


Circle (18) on Reply Card

users have linked up with BTS distribution switching equipment. Let us send you our free booklet, "The Switcher Network." Write or call today. BTS Broadcast Television Systems, PO Box 30816, Salt Lake City, UT 84130-0816, (801) 972-8000.

"Customer satisfaction is our satisfaction"

BTS Broadcast
Television
Systems
A joint company of Bosch and Philips

Comparing standards

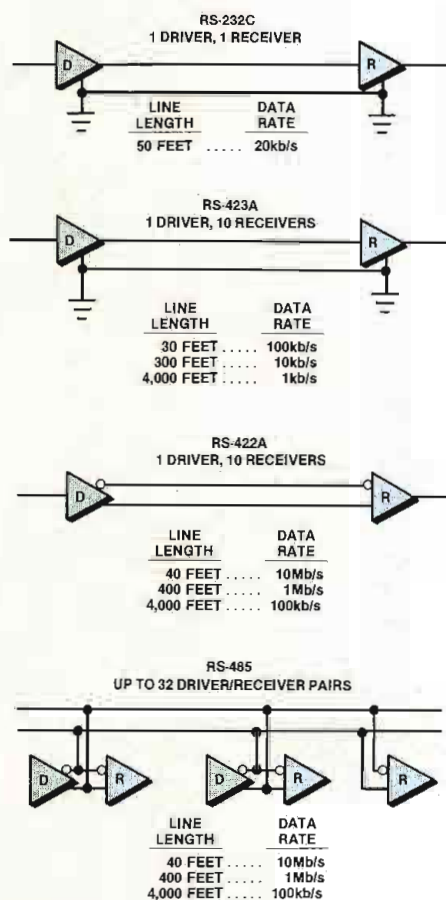

Configurations of popular EIA interfaces.

Only RS-232 defines all aspects of asynchronous serial data communications typically used with data terminals and modems. It specifies a controlling device (DCE) connected to an operating device (DTE) via a dedicated data link. The data are transmitted in an asynchronous manner with a leading *start* bit (a *space*), followed by five to eight databits, transmitted least

significant bit first. The data information is optionally followed by a parity bit, and the packet is completed with one or two *stop* bits (a *mark*). When the data link is idle, the line is maintained in a marking state. All bits use NRZ encoding.

RS-422, RS-423 and RS-485 specify only the electrical characteristics of the transmission environment.

PARAMETER	RS-232C	RS-423A	RS-422A	RS-485
MODE OF OPERATION	SINGLE-ENDED	SINGLE-ENDED	DIFFERENTIAL	DIFFERENTIAL
NUMBER OF DRIVERS AND RECEIVERS ALLOWED	1 DRIVER 1 RECEIVER	1 DRIVER 10 RECEIVERS	1 DRIVER 10 RECEIVERS	32 DRIVERS 32 RECEIVERS
MAXIMUM CABLE LENGTH (FEET)	50	4,000	4,000	4,000
MAXIMUM DATA RATE BITS/SECOND	20k	100k	10M	10M
MAXIMUM COMMON-MODE VOLTAGE	± 25V	± 6V	6V - 0.25V	12V 7V
DRIVER OUTPUT	± 5V MIN ± 15V MAX	± 3.6V MIN ± 6.0V MAX	± 2V MIN	± 1.5V MIN
DRIVER LOAD	3kΩ TO 7kΩ	450Ω MIN	100Ω MIN	60Ω MIN
DRIVER SLEW RATE	30V/μs MAX	EXTERNALLY CONTROLLED	NA	NA
DRIVER OUTPUT SHORT-CIRCUIT CURRENT LIMIT	500mA TO VCC OR GRD	150mA TO GRD	150mA TO GRD	150mA TO GRD 250mA TO 8V or 12V
DRIVER OUTPUT RESISTANCE (HIGH Z STATE)	POWER ON NA	POWER ON NA	POWER ON NA	POWER ON 120kΩ
	POWER OFF 300Ω	POWER OFF 60kΩ	POWER OFF 60kΩ	POWER OFF 120kΩ
RECEIVER INPUT RESISTANCE	3kΩ TO 7kΩ	4kΩ	4kΩ	12kΩ
RECEIVER SENSITIVITY	± 3V	± 200mV	± 200mV	± 200mV

Comparison of popular EIA circuit standards.

INTRODUCING TWO NEW BULK ERASERS THAT WILL WIPE OUT YOUR VIDEO TAPE LIBRARY.



Data Security's Type II — the revolutionary bulk eraser for 1500 Oe metal particle video tape.

The new Sony Betacam SP and Panasonic MII are using an advanced 1500 Oe metal particle video tape that presents a new challenge to degaussing equipment. For rerecording integrity, tape manufacturers specify a minimum erasure level of -60dB on tape saturated with a square wave signal of 25kHz at 30ips. At best, conventional erasers will erase to only -40dB.

Data Security's new Type II is the only eraser on the market which will erase this signal to manufacturers' specifications. And then some. The Type II actually erases 1500 Oe metal particle video tape more than -80dB.

This powerful new bulk eraser has recently been approved by the National Security Agency for declassification of high energy tape and it has just become available to the broadcast video industry. So you can now use and reuse the advanced new high quality tape media on the market.

And wipe out expensive tape replacement costs.

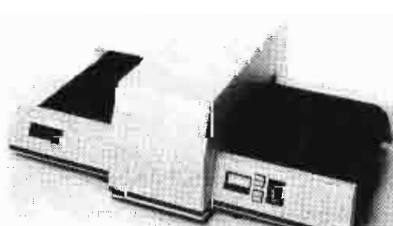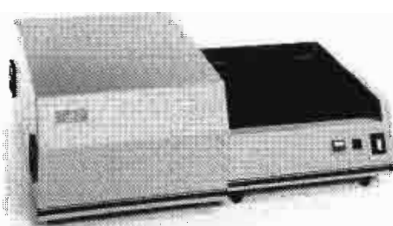

The TC-14 — today's most cost-efficient eraser of conventional 700 Oe magnetic tape.

In a 15 second cycle, this machine will completely erase long wave audio and control tracks, along with short wave video tracks on conventional cobalt ferric oxide high energy tape. A typical video signal is wiped out to -90dB.

The TC-14 accommodates reels up to 14 inches. And the conveyor belt for this eraser enables you to fully automate your degaussing stations. This transport system provides for a variety of tape formats with no adapters or adjustments.


The TC-14 offers you the best of conventional technology at the lowest price available.



DATA SECURITY, INC.

2801 N. 27th Street Lincoln, NE 68521 1-800-225-7554

Stations looking to automate, look to IGM.

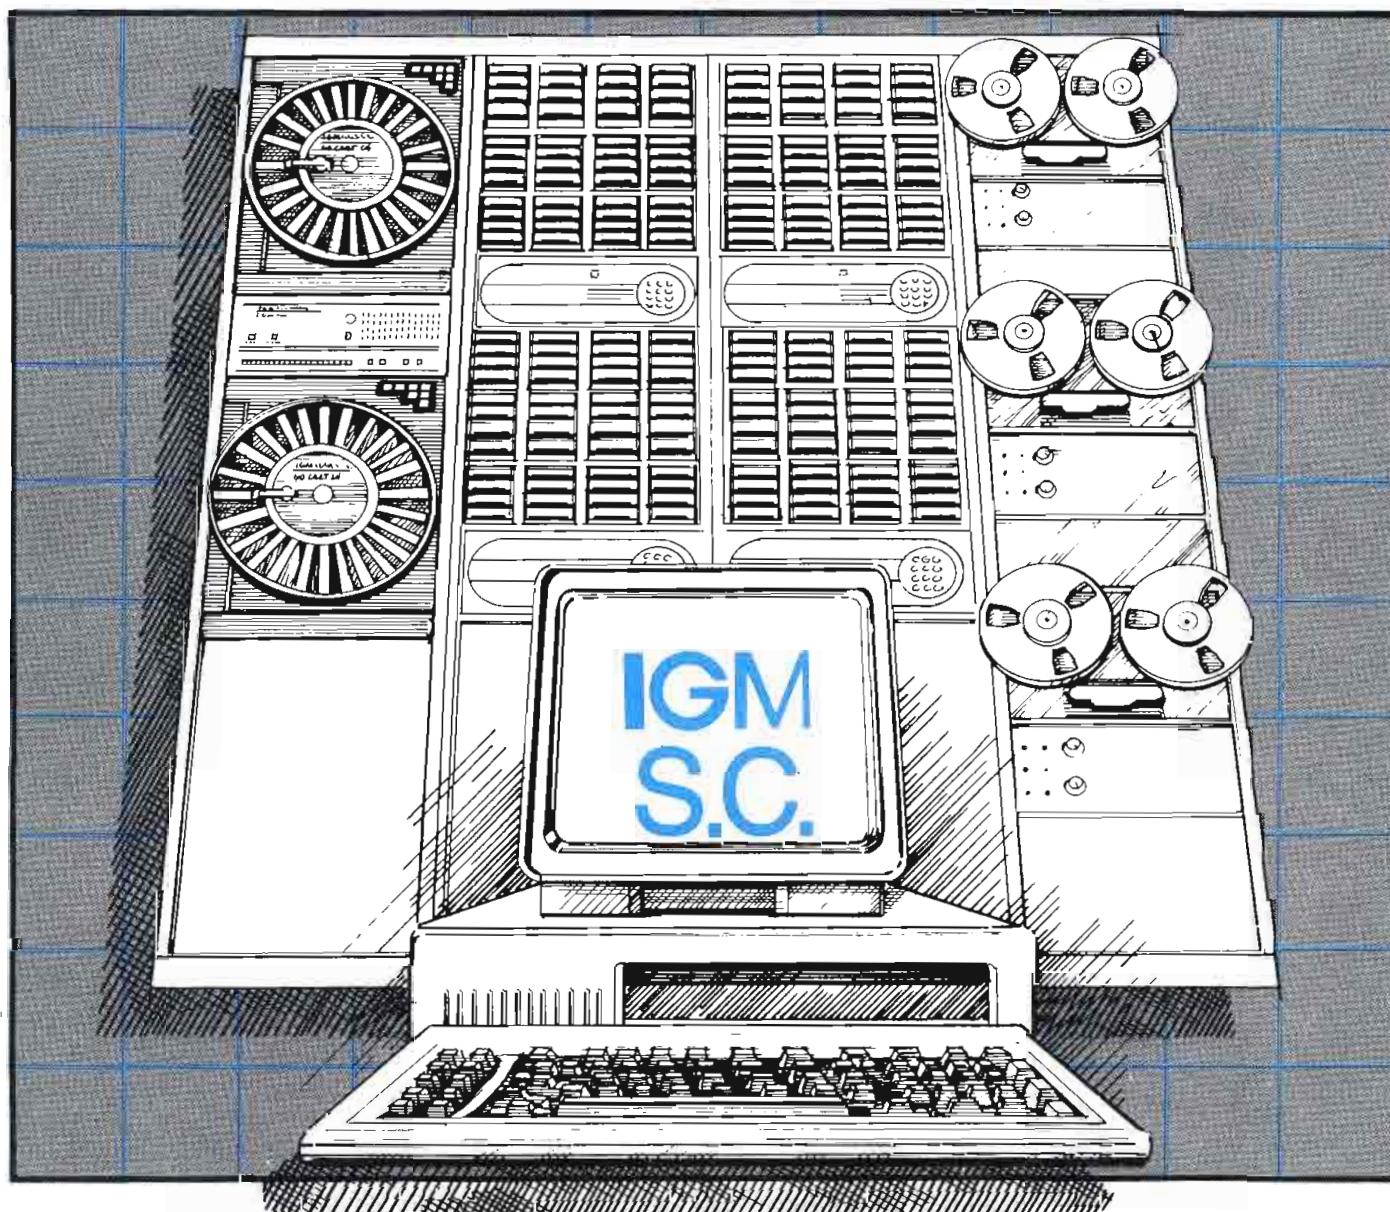

When you are thinking of using a program automation system, a number of questions come to mind. How do I handle network news? How many events of memory do I need to handle any format? How will this work with my billing system? With over 20 years of experience, IGM can help you determine how best to add automation to your operation. The broadcast industry has counted on IGM to build automation systems for all kinds of operations, from small radio stations to network operations.

We can build a program automation system for your station using an IBM-PC or compatible as the brain to

control the IGM-SC or IGM-EC automation controllers. Depending on your specific application, you can add the IGM GoCart and Instacart to handle your commercials and announcements or, if you need reel-to-reel machines or other cart machines, we can include the Studer-Revox PR-99 and Fidelipac cart machines in your system.

For information on how you can use automation successfully, call

800-628-2828 Ext. 578

IGM COMMUNICATIONS

282 West Kellogg Road

Bellingham, Washington 98226

(206) 733-4567

Circle (36) on Reply Card

www.americanradiohistory.com

THE
HARRIS CONNECTION
WILL KEEP YOU ...



Here's What Broadcasters Say About THE HARRIS CONNECTION:

VHF-TV

Joseph A. Carriere, President
Caprock Telecasting, Roswell, NM/Lubbock, TX:

"When a studio fire wiped us out, our Harris sales manager was on the scene in six hours and we were back on the air in 10 days!"

Our VHF equipment from Harris gives us the best quality money can buy. And Harris really stands behind its products.

Over the years, Harris has treated us very well. Other manufacturers may make good equipment, but not all can give the kind of support we get from Harris."

KNOB, FM-RADIO

John R. Banoczi, General Manager
Anaheim, CA:

"When it came time to buy a 35 kW transmitter, we found that Harris had the right product with the right features at the right price — so we went with the Harris FM-35K."

Besides — Harris has an excellent reputation for backing and servicing the products it sells."

KCOB, AM-RADIO

John Carl, General Manager
Newton, IA:

"Our SX-1A, 1 kW AM transmitter performs as advertised. It gives us a stand-out presence on the dial — especially in our fringe areas."

And Harris's SunWatch has completely solved our PSA/PSSA power scheduling problems. I don't know how a station could do it otherwise.

When we've needed service, Harris has always come through."

WEAT, AM-RADIO

Bert Brown, Chief Engineer
West Palm Beach, FL:

"Most AM broadcasters who have upgraded their facilities in this part of the state have gone with Harris SX transmitters. As you are well aware, this is a lightning prone area of the country, and our SX-5A has performed well above our expectations in the area of maintenance and downtime."

We chose Harris for its professional service and support. I have a good rapport with Harris people."

WSTQ, FM-RADIO

Al Moll, General Manager
Streator, IL:

"Before we switched to Harris, we were barely on the air with a poor signal. Our FM-3.5K, 3.5 kW transmitter makes us a stand-out on the dial."

KHBS, UHF-TV

Don Vest, Director of Engineering
Sigma Broadcasting, Fort Smith, AR:

"KHBS is our first Harris installation, and I'm very glad I did it."

What impresses me most about Harris is the service and parts support. In 19 years of broadcasting, it's the most cooperative and helpful in the industry.

Harris knows how to treat its customers. Harris is going to win!"

WOMA, FM-RADIO

Dale Eggert, General Manager
Algoma, WI:

"Our FM-3.5K, 3.5 kW transmitter has operated flawlessly since our sign-on last November."

And our Harris representative not only helped us put our equipment package together, but stayed on duty after the sale to see that we met our critical air date!"

WKNO, VHF-TV

Pat Lane, Chief Engineer
Memphis, TN:

"Before I ordered our two new transmitters, I tested three service departments. Harris was the only one with an engineer on duty at 10:30 p.m., the Fourth of July. With the others I got a recording and an answering service."

What impresses me most about Harris is the attitude and the people."

Find out today how The Harris Connection can keep your station ON THE AIR . . .


. . . and we'll send you your free, full-color ON THE AIR poster. An up-to-the-minute symbol of our industry's rich tradition.

Just call us TOLL FREE at 1-800-4-HARRIS, ext. 3002. Or write: Harris Corporation, Broadcast Division, Marketing Department, P.O. Box 4290, Quincy, IL 62305. Our poster supply is limited, so act today.



HARRIS

Circle (37) on Reply Card

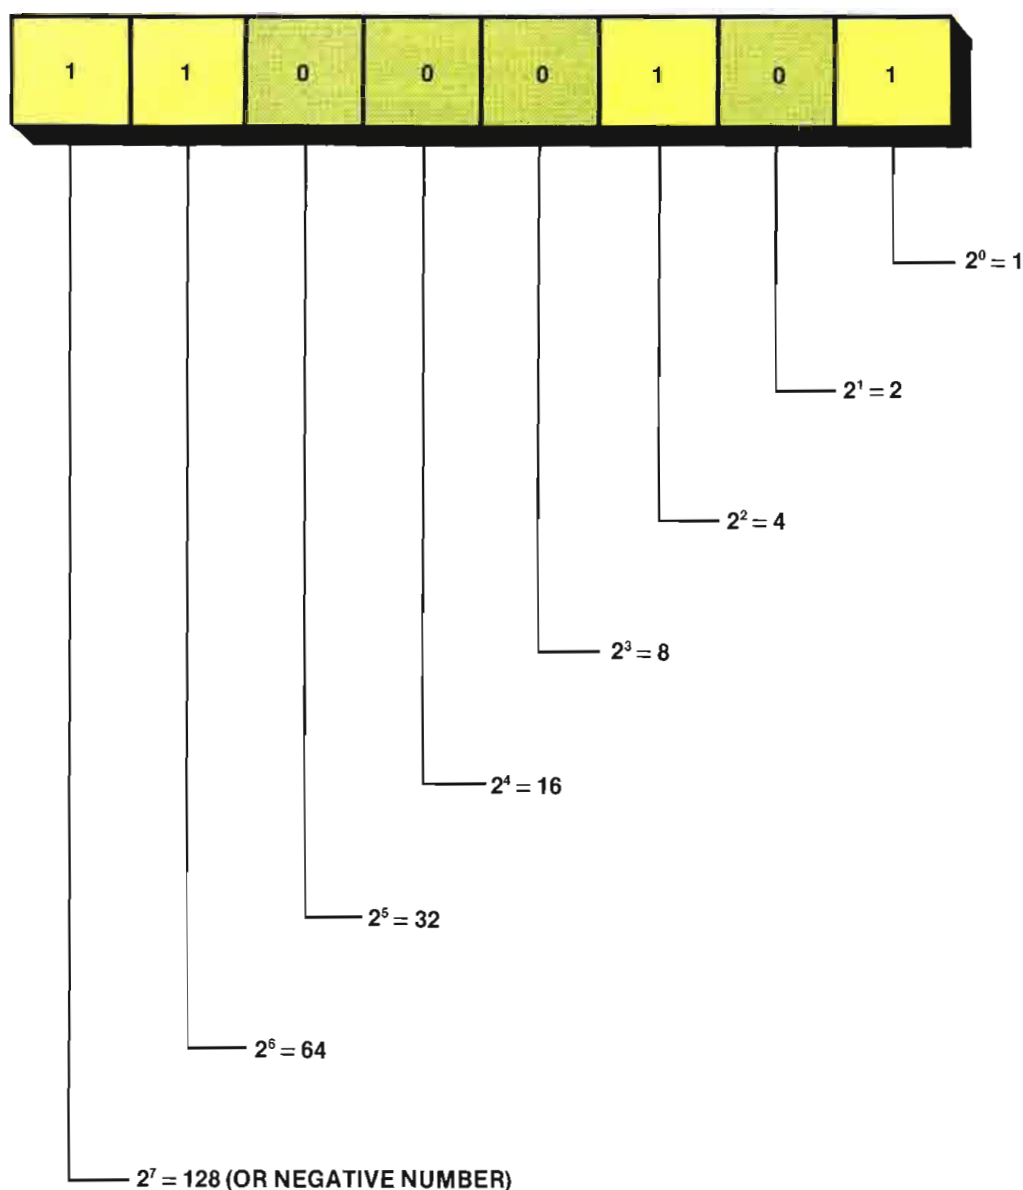

EXAMPLE: 11000101 = 197 UNSIGNED
 = -57 SIGNED
 = "E," EVEN PARITY

Figure 1. Bit positions in a byte gain place-holder values by powers of two.

Continued from page 46

serial data communications system attractive in the control of broadcast switchgear.

Principles of serial data transmission

Several items must be considered when attempting to implement a serial data transmission system. The first of these is the type of data link to be used. Once the basic serial data communications link is selected, the actual means of controlling the serial datastream must be determined. Although these two decisions are treated separately in this discussion, the choice of one often will dictate the other.

There are four common types of data links. The simplest form of serial communications is the dedicated data link (see Figure 2). In this approach, one set of lines is used to connect two locations. Usually, one location is the controller (termed data circuit-terminating equip-

ment, or DCE) and the other is a data terminal (called data terminal equipment, or DTE); often, however, both ends of the data link are given equal status.

The only major concern in this type of system is whether the individual devices possess sufficient processing power to transmit and receive data at the same time (*full duplex*) or must transmit and receive data on a time-sharing basis (*half-duplex*). Because only two devices can operate in this manner, the use of dedicated data links typically is limited in broadcast switchgear to the connection of an external computer or master control console.

The star connection

A second type of data link is the *star* connection, as shown in Figure 3. In this system each remote device is connected to the central unit via a dedicated data link. Although the central unit can be a switching exchange such as a data router, most often it is the processor of

the primary switching matrix or a separate computer. The main advantage of this technique is that all remote devices can be active simultaneously within the limitations of the central unit.

Two primary limitations exist with the star approach. Because each unit is using a dedicated data link, the operation of one unit is hidden from the balance of the system unless the central unit rebroadcasts the operation, thus tying up the other data links during the rebroadcast time.

The second limitation consists of remote unit logistics. If a remote unit must be moved, its associated data link must be moved with it. In many installations, this means abandoning the existing cable and running another cable to the new location.

However, the star connection has a definite application in situations in which current system operation is not important to the remote site and the remote sites are essentially permanent. An example of this type of situation would be a teleconference.

The loop

Another type of data link is the loop approach (see Figure 4). In this approach the system controller also is connected to the first device in the system. The next device is connected to the first. This daisy-chaining is continued until the last device is connected.

The last device is then connected to the system controller. The system controller initiates a message to the first device. This unit then passes the initial message down the daisy-chain and adds its own data (if any) to the end of the serial stream. This process is repeated until the final modified serial datastream is received by the system controller.

Although it is quite simple to implement, the loop approach is limited in a broadcast environment. As with the star data link, only the system controller is aware of the entire system operation while the remote units are blind to downstream operations. Unlike the star system, however, the loop approach allows a remote unit to be relocated and reinserted anywhere in the loop. The danger in applying the loop data link in a multi-unit control scheme is that if a remote unit fails, or is removed without closing the loop, the entire system is put out of service.

The party line

By far the most popular multidevice data link is the *party line* (see Figure 5). In this approach, all devices are connected to a common serial bus. The limitations and advantages of this system are determined by the actual party line usage (not that a party line is half-duplex by definition).

Precision motion control... from start to finish.

New!

**MultiController
is available with
the New HS-110P
Studio Camera
Pan/Tilt Head.**

Designed for cameras and accessories weighing up to 250 lbs. Provides broadcast quality motion control with 18 arc second repeatability.

**Practice, learn, fine tune,
recall and execute!**

- MultiController operates the programmable high speed HS-100P head and will accurately and repeatedly execute your most creative camera shots... adding new artistic dimensions to your productions.
- The controls are carefully placed and designed to provide the proper feel and responsiveness. When a shot is recalled, the camera is positioned to its new location with all the skill and finesse of an experienced camera operator.
- Stored camera motions are "learned" through the manual controls which remain "live" so motions may be fine tuned (edited) in either the rehearse or recall modes.
- MultiController operates up to 4 cameras (from a single panel) and up to 5 miles from the HS-100P head.
- Discover how MultiController can expand your production capabilities. Call or write for complete details.

Circle (38) on Reply Card



TSM

**TOTAL SPECTRUM
MANUFACTURING INC.**

20 Virginia Avenue, West Nyack, NY 10994
(914) 358-8820

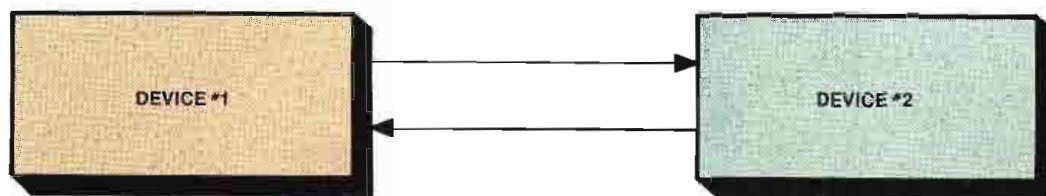


Figure 2. The dedicated data link is the simplest form of data communications.

Three primary communication techniques currently are used. All of them share the advantages of reduced cabling and device position independence, and,

because communication is performed over a common data line, all devices can monitor the system operation. However, each technique has its own distinct ad-

vantages and disadvantages.

Polling

The first party line technique is termed *polling*. This type of system contains a single control unit similar to that used in both the star and loop implementations. The central control unit polls each remote unit in turn to determine whether data communications are required by that unit. If a positive response is encountered, the required data transfer function is performed, then the central unit polls the next remote unit.

This approach has the advantage of being the easiest to design and implement. The main disadvantages of a polled system are the time lost polling non-active units and that the data link can have only one system controller.

A modification of the polling approach is *token passing*. In this application, the current system controller relinquishes system control by passing a *token* or software command to another system controller. This new system controller operates the bus in the normal polling manner until the token is passed to another controller.

This is the simplest implementation of multiple controllers on a single serial communications bus. Because the token will be passed to another controller, each controller can be designated to optimize bus usage and reduce time spent polling non-active units.

Two major disadvantages are encountered in using a token-passing scheme. If a controller does not service a specific remote unit during the time it has the token, communications with that remote unit are postponed until another controller is established. This can be a serious limitation if the remote unit is requesting a crosspoint operation that must be acted upon immediately. The second disadvantage is that if the controller that has the token fails, the system becomes inoperative unless some form of bus monitor is used.

The most efficient use of a party line data link is through the use of a *collision detection* scheme. In this approach, all devices on the party line have equal access to the serial databus. When one device must communicate with another, it monitors the bus to verify that no other device is currently transmitting and then transmits its data. Because all devices monitor the serial databus, the intended device receives the message. If more than one device attempts to use the bus at the same time, a *collision* occurs, and the data transmitted are meaningless.

In the collision detection scheme, a transmitting unit monitors the actual data placed on the bus. If the bus data differ from the data being sent, a collision is assumed and the transmission is aborted.

Continued on page 58



Shure's SM83 Lavalier Mic makes everyone look good.

On-camera talent likes the omnidirectional SM83 condenser mic's mid-range dip, because it gives male and female voices a smoother, more natural sound.

Sound engineers appreciate the SM83's tailored frequency response because it requires less equalization, and its low-frequency rolloff quiets on-air rumble and clothing noise.

Set directors are impressed with the SM83's neat appearance and side-entry cord because it disappears behind clothing. *Production assistants* enjoy the SM83's mounting versatility. A single clip works vertically or horizontally. A double clip holds two mics. A universal mount can be sewed, pinned or taped to clothing.

Repair technicians love the SM83's easily accessible cartridge (just unscrew the cap), and that cable replacement requires only a screwdriver and needle nose pliers. (No soldering).

Field crews appreciate that the SM83's electronic pack is powered by a standard 9-volt battery or a mixer's phantom supply.

For more information on Shure's entire line of professional microphone products, call or write Shure Brothers Inc., 222 Hartrey Ave., Evanston, IL 60202-3696 (312) 866-2553. Available under G.S.A.



SHURE®

Breaking Sound Barriers for over 60 years™

Circle (58) on Reply Card

AT LAST! THE AFFORDABLE TOTAL AUTOMATION SYSTEM.

You've heard that before, right? But the quotation you received was out-of-sight. Outrageous. And everything you needed was an extra-cost option! No more!

Enter Rational Broadcast Systems — with a true, time-proven, real-time, automation system you can really afford. The Rational choice features an ultra-reliable 32-bit minicomputer, from fully-functional entry level solutions to the most expansive systems. 24-hour operation. A data base that reorganizes itself to maximize productivity. And automatic backup so you don't lose any data — anytime.

Get instantaneous real-time updates and ad hoc inquiry providing complete control of information at your fingertips.

Integrate billing. Tape inventory with bar code validation. Report writer. Use your existing PCs as on-line terminals as well as for networking and file transfer.

Cost? You've heard others quote double Rational's price for systems that can't touch our breadth and versatility.

And Rational Broadcast Systems includes total installation, documentation and training.

Look into the total automation system you've always wanted, from the company with over 25 years of systems experience. Write or call Rational Broadcast Systems, 2306 Church Road, Cherry Hill, New Jersey 08002. Telephone: 609/667-7300.

Or circle the number.



Rational Automation System installed at the Pennsylvania Public Television Network, Hershey, PA.

RATIONAL

It's not only our name — it's our approach to your business!

Circle (93) on Reply Card

Consistency

Delivering beautiful pictures is only half of what you need from your video tape. The other half is doing it consistently, time after time. That's why Ampex 196 stands alone.

The reason is Ampex Process Management. APM is an innovative manufacturing concept, using advanced proprietary tools to enable us to control the consistency of the entire production process. From raw materials to finished products. No other video tape delivers such consistent performance, reel after reel.


APM combines a management commitment with statistical process control techniques to monitor every step in the manufacturing process. As a result, Ampex is able to produce a video tape of unmatched consistency. Which means you get the cleanest, sharpest pictures production after production.

If you'd like to know more about how APM contributes to the consistency of Ampex 196, call or write today for a free brochure. Ampex Corporation, Magnetic Tape Division, 401 Broadway, Redwood City, CA 94063. 415-367-3809.

AMPEX

Circle (41) on Reply Card



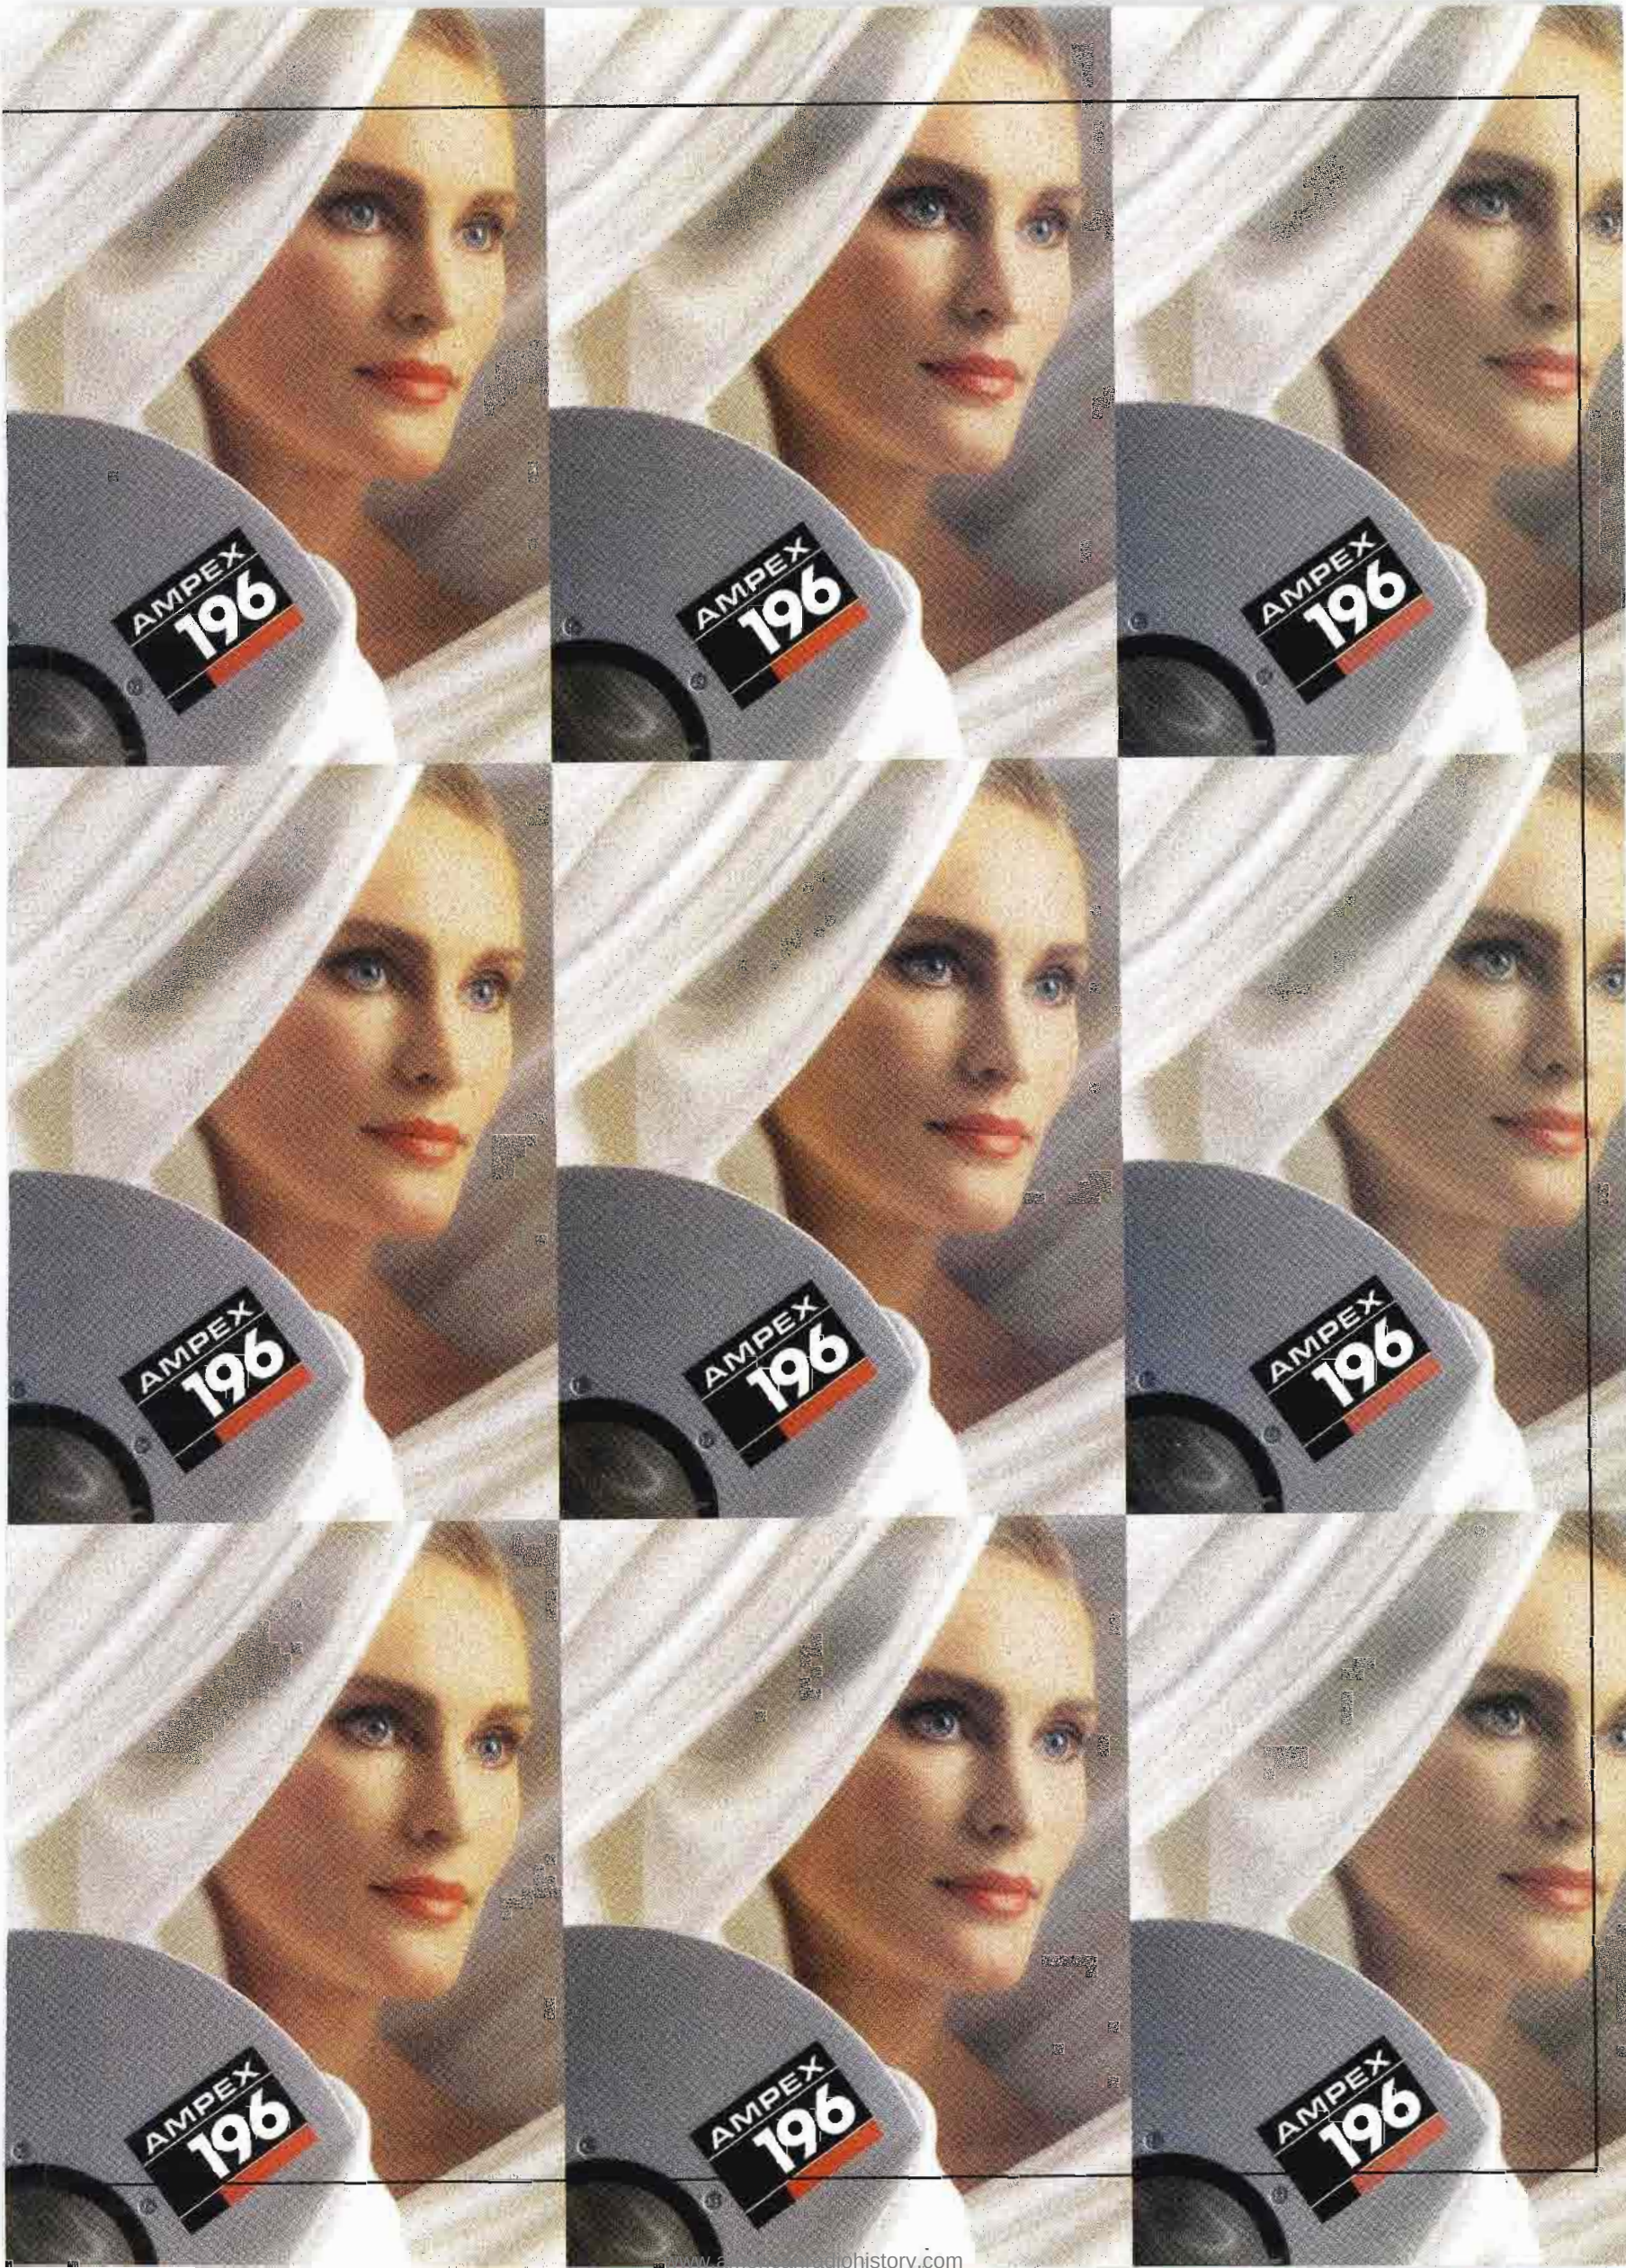

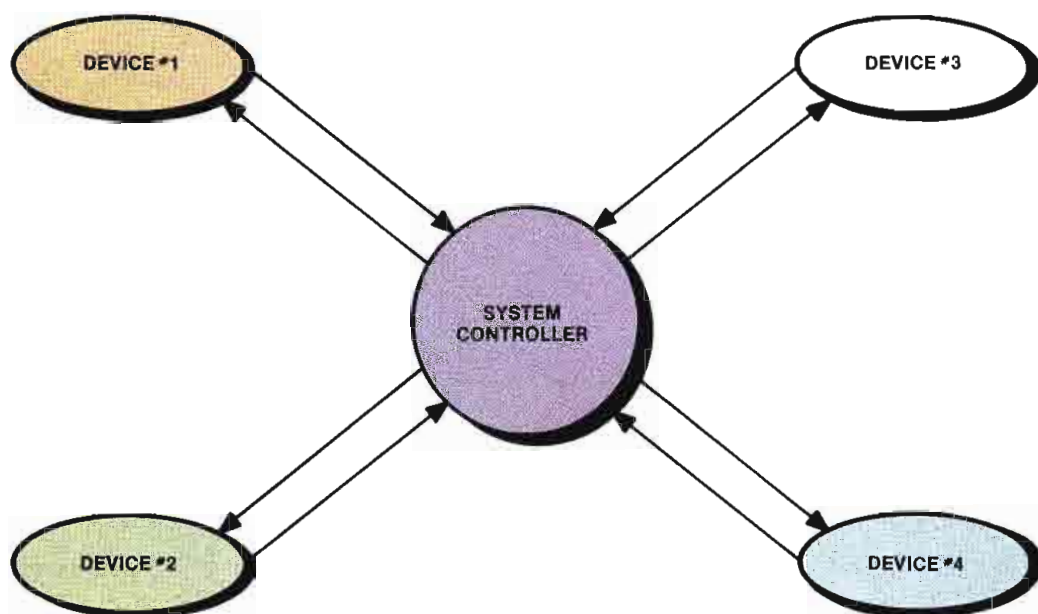


Figure 3. The star data link is characterized by dedicated data links between each remote device and the central unit.

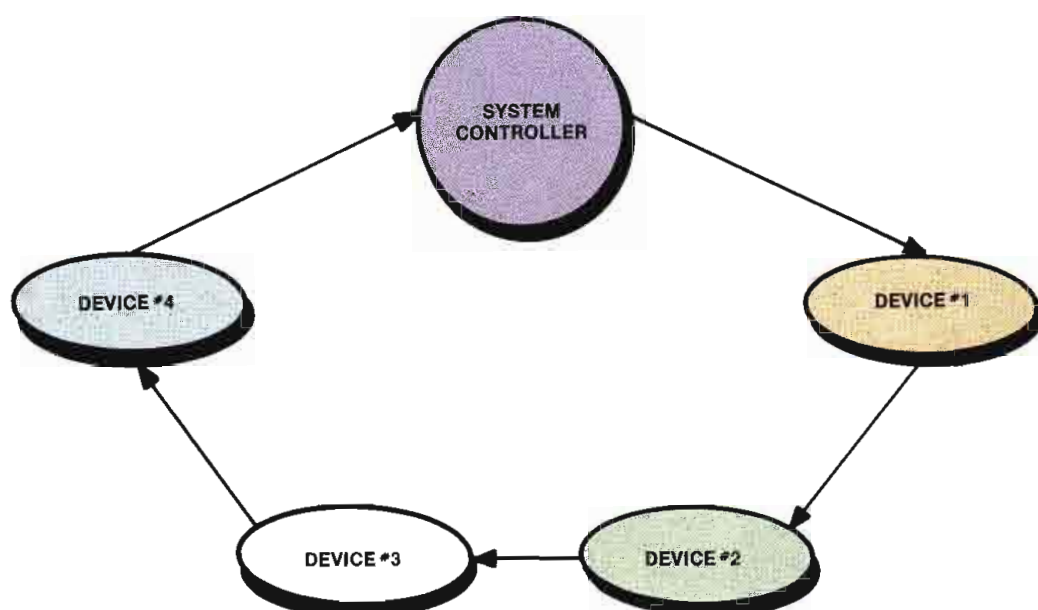


Figure 4. The loop data link is simply a double-ended daisy-chain.

Continued from page 54

A pseudorandom amount of time passes before the unit attempts to use the bus. This pseudorandom time prevents the continual bus-crashing that would occur with fixed wait periods.

The use of a collision detection technique optimizes the bus usage, reduces response time to a system communications request and allows for device removal without disabling the system operation. The costs for these advantages are increased device complexity necessary to detect and respond to a bus collision and extensive system planning to account for independent unit accesses to the serial data link.

Control of the serial datastream

The simplest way to control the data flow of a serial stream is to use a synchronous clocking scheme. In this approach, two wires are used in each data direction. One contains the actual

databits being transmitted, and the other line is used to inform the receiver when the databit is valid. The advantages of this technique are that its speed is greater than any serial control approach and that the communication rate is system-independent because the transmitter lets the receiver know when the data are valid.

Although of major benefit in star or loop systems, a fully synchronous approach is not always the technique of choice in a broadcast switchgear control environment. Because a separate clock line is required for both directions of communications, five to eight wires are required to implement this technique. The requirement of a separate clock line also precludes the use of a fully synchronous system in a party line data link.

Several techniques have been devised to transmit synchronous serial data without a separate clock line. All of them require the system to assume a fixed

clock rate and encode the clocking information into the actual datastream. Although these encoding approaches make the communications rate application-dependent, they remove the requirement for separate clocking lines and allow for use of a party line data link. Most effective multiple-device serial control systems use some form of encoded-clock synchronous technique.

An extremely popular means of transmitting serial data is to use an asynchronous technique. The most common protocol used is the EIA RS-232 standard for information exchange. This data format is asynchronous only in the timing of each data packet; the individual bits are located by an assumed clocking rate (thus an asynchronous serial data communications rate is application-dependent).

The datastream is used to synchronize the timing clock by going from the idle *mark* state (typically a 1) to the *space* state for a 1-bit time period. The balance of the serial data packet of up to eight databits follows, least significant bit first. An optional parity bit may be included after the data packet. The end of transmission for the packet is set by a stop bit that remains in the mark state for one (or optionally, two) bit periods.

Although the asynchronous technique is inefficient due to the overhead of the start and stop bits, it is the easiest to implement in dedicated data links and is universally employed under the RS-232 protocols in interfacing computers, modems or data terminals to broadcast switchgear.

After the type of serial data communications has been decided there is usually confusion about what else to specify in order to implement the system. Often, buzz words such as RS-232 or RS-422 are used as a description of a serial data system. In order to complete the specification of the communications system, the data-encoding technique, system electrical characteristics and the actual data-handling protocols must be firmed.

Data encoding

Data encoding refers to the actual means of defining a 1 and a 0 condition of a serial databit. The need to include the clocking information in the datastream has caused the emergence of several different encoding schemes (see Figure 6).

The original encoding is called *NRZ* (non-return to zero). In this technique, a stream of data that contains 1s remains in the mark state until a 0 is encountered. The datastream then stays in the space condition until another 1 occurs.

This is the easiest design to implement. However, unless a separate clocking line is supplied, the time slots of the in-

COLORFUL SOLUTION!

Video Studio



Studio - Coblevision - Woodbury, N.Y.



If your problem is finding an affordable video paint system that meets all your color needs, then Chyron has the best solution. The CHAMELEON.



The Chyron Chameleon is a true video paint system, with its own tablet and pen and a removable 10 megabyte hard disk. Other valuable features include: an easy-to-use icon system, 256 on-line colors, and 768 x 482 resolution which is 40% higher than most other available systems.

Yet with all this the Chameleon is far more reasonably priced than you might expect.

To learn more about this creative, problem-solving video-graphic paint system, call or write for our free brochure.

It tells you how to get great reds and yellows for very little green.

CHYRON

Video Products Division
Member of the Chyron Group
265 Spagnoli Road, Melville, NY 11747
Tel. (516) 249-3018

Circle (42) on Reply Card


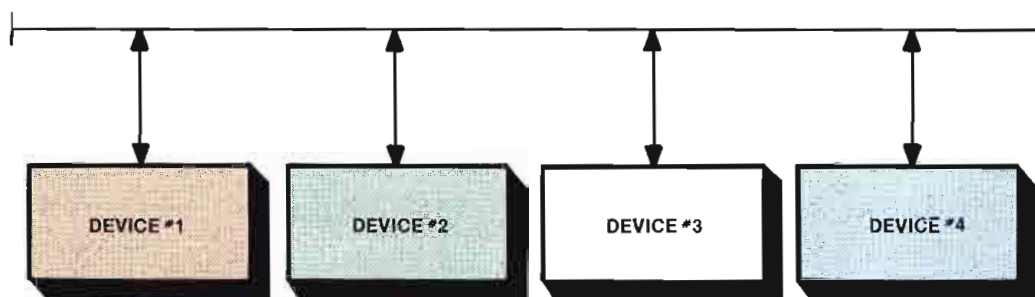


Figure 5. The party line data link is the most popular multidevice data link. All devices are connected to a common serial bus.

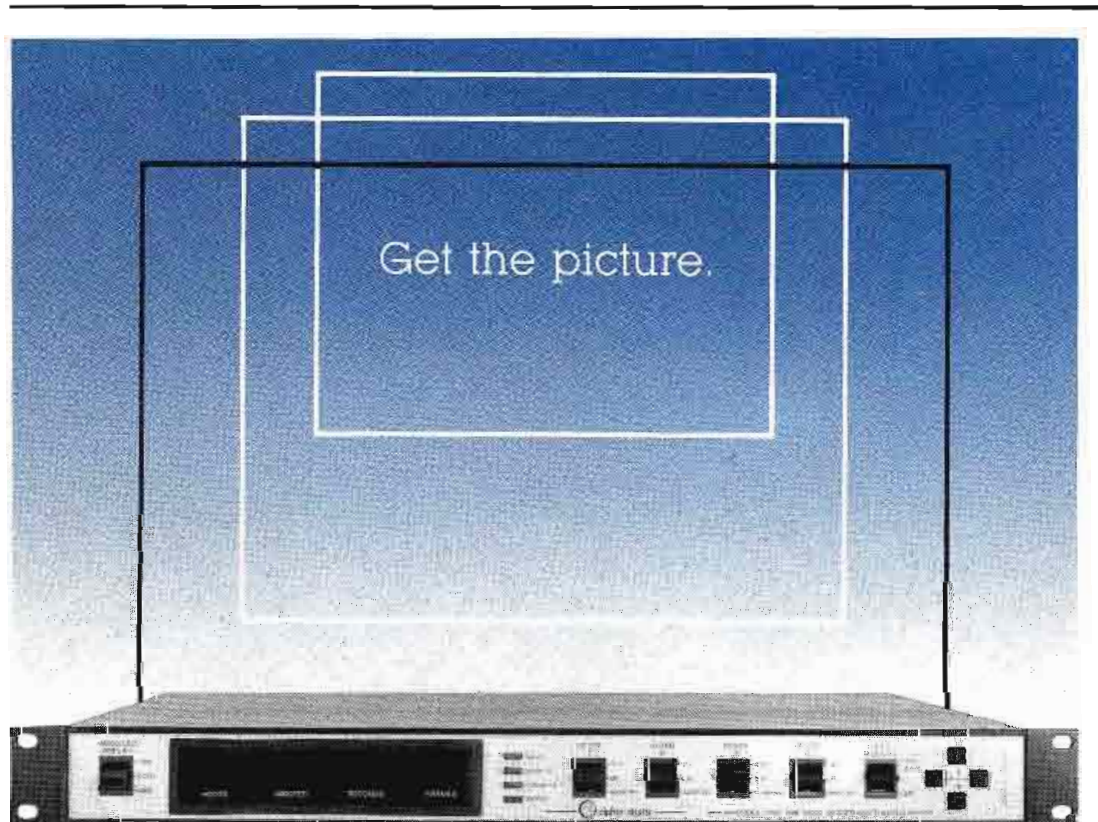

The CDI-700A Time Code Reader, with Quad Video Character Inserter, is easy to operate and brings affordability to video production and post production editing, and it's backed by Cipher Digital's reputation for dependability and 3 year warranty.

An important advantage of this microprocessor-based Time Code Reader is its ability to generate burned-in work prints for production from multiple synchronous video sources, thereby minimizing error by precisely identifying every video frame.

For more details contact Cipher Digital today. Call (800) 331-9066.



cipher digital, inc.
P.O. BOX 170/FREDERICK, MD 21701
(301) 695-0200 TELEX: 272065

Timely today, consistent with tomorrow.

Circle (43) on Reply Card

dividual bits are unknown. Even with the assumed clocking of the asynchronous encoding specified by RS-232, only a few bits (typically less than 12 to 15) can be accommodated before the time slot for subsequent bits becomes uncertain without packet resynchronization. Despite this limitation, the NRZ encoding, combined with the additional specifications of EIA standard RS-232, remains the technique of choice for dedicated data links and is the only serious alternative for communicating with standard data terminals or modems.

The advent of cassette tape units for external data storage posed a problem that could not be solved by NRZ data encoding. Because magnetic media is used to store data on tape, the stored data require some form of alternating field to be read by the pickup heads.

This requirement led to the development of the *bi-phase* encoding technique (sometimes referred to as Manchester I). This encoding scheme uses a state transition at the time boundary of each bit in the datastream. The direction of this transition (whether mark to space, or space to mark) is insignificant because this technique monitors only state transitions rather than the actual mark or space states of NRZ. Because the data rate is assumed by the system, the approximate times of these transitions are known and the receiver can synchronize easily with the serial datastream.

To determine the presence of a 0 or 1 state of the current databit, the receiver monitors any transition at the middle of the bit time slot. A transition at this time indicates that the bit is a 1, while the lack of a transition indicates a 0.

The bi-phase technique has the advantage of offering clocking information within the datastream as well as an encoding that has no effective dc component while the datastream is active (a requirement of magnetic or transformer-coupled serial data systems). The primary disadvantage of the bi-phase encoding is the difficulty in decoding the transmitted datastream.

To relieve some of the decoding problems of bi-phase, the technique has been updated to what is now termed Manchester II (commonly referred to simply as "Manchester"). This encoding technique is similar to bi-phase. Only state transitions are used to extract the clocking information and to determine the value of the databit. The main difference is that the transition in the Manchester II approach occurs at the mid-bit interval. If the bit is a 1, the transition is from mark to space; otherwise the transition is from space to mark.

This approach shares all the benefits of bi-phase (clocking information and no dc component) and is easier to generate and decode. Manchester II encoding is the

9-BIT VERSION
NOW AVAILABLE



UNWANTED FRAME GRABBING STOPS HERE



DFS-3000N Digital Frame Synchronizer

If your video synchronizer lets you down on a noisy feed, you need the new Leitch DFS-3000N. This digital frame synchronizer incorporates input processing circuitry that uses the latest in digital auto-correlation techniques to prevent intermittent frame grabbing or switching to black. Only Leitch offers this capability.

Now you know one of the features of the Leitch DFS-3000N. But the advantages don't stop there. Neither should you. Write or call (toll free) for further information.

In U.S.A. 1-800-231-9673
In Canada 1-800-387-0233



Progressive Concepts in Television Technology

Leitch Video of America, Inc.
825k Greenbrier Circle
Chesapeake, VA 23320
(804) 424-7920

Leitch Video International Inc.
10 Dyas Road, Don Mills
Ontario, Canada M3B 1V5
(416) 445-9640

Circle (44) on Reply Card

www.americanradiohistory.com

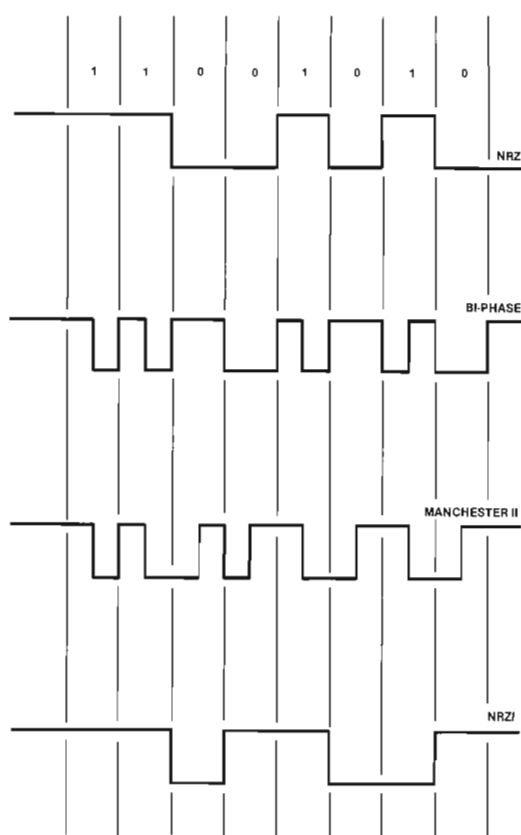


Figure 6. Typical data-encoding formats.

technique of choice in modern transformer-coupled serial communications systems using a party line data link.

A fourth encoding scheme has been

developed for *high-level data link control* (HDLC) applications. The *non-return to zero inverting* technique (NRZI) maintains the basic advantages of the NRZ encoding while presenting clock synchronization information at sufficient intervals. In NRZI, the clock rate is assumed and the datastream maintains its current mark or space state as long as the data-bits are 1s. Whenever a 0 is encountered, the stream changes to the opposite state. This transition defines the location of 0s in the datastream as well as providing a bit boundary for clock resynchronization in long datastreams.

This encoding technique, however, must be reserved for use with the HDLC/SDLC (synchronous data link control) communications protocols, because only these protocols guarantee a sufficient number of 0s within any datastream to provide adequate clock resynchronizing transitions.

Baud rate

The term *baud rate* often is used in defining the data transmission rate of a serial data link. Because baud rate is actually the maximum possible transitions rate, this term is correct when applied to bit rates of NRZ and NRZI encoding. However, the maximum transitions rate in bi-phase or Manchester II encoding is

twice the actual data transmission rate (hence the baud rate is twice the bit rate). Unless NRZ or NRZI encoding is used, the transmission rate should be specified in bits per second rather than baud.

Electrical characteristics

The electrical characteristics of a serial data link are fairly easy to describe, because they are well defined in industry-established standards. Following are descriptions of the four standards commonly encountered in the broadcast industry:

The most familiar of all serial data communications standards is RS-232, established by the EIA (see Figure 7). Although its use is limited to dedicated data links, this is the only standard commonly used in the broadcast industry that defines all aspects of implementing a serial data link (except for the data rate). As noted previously, RS-232 specifies NRZ encoding. A mark state (1) is established at -5Vdc to -15Vdc while a space state (0) is set at +5Vdc to +15Vdc.

The undefined region between -5Vdc to +5Vdc is used as a buffer to reduce the effects of electrical noise on the serial datastream. This noise can originate from motors, power wiring, lighting equipment or other electrical equipment

ALAMAR UPDATE

ALAMAR ADDS REMOTE CONTROL TO AUTOMATION LINEUP

Alamar Leads in Net Delay/Program Playback

KSPR, Springfield, Mo., and WPWR-TV, Aurora, Ill., are the 25th and 26th North American installations of Alamar's MC-1050 Television Sequencer Systems. Broadcasters, cable systems and program originators are finding the MC-1050 the most cost-effective way to automate one-to-six independent program channels while using the general purpose record/play channel for network delay.

In the CATV field Montgomery County (Md.) Television has purchased the MC-1050, with Alamar's Schedule Manager, for its community access cable system.

As with all Alamar automation systems the SMPTE/EBU bus interface is one reason for the MC-1050's growing acceptance.

Auto-Cart Delivers Affordable Automated Programming

Auto-Cart, Alamar's newest moderately-priced VTR Sequencer, is now installed at WYZZ-TV, Bloomington, Ill., where the compact single channel system is used for commercial insertion and program playback. Auto-Cart prices begin at \$7995.

Holiday Inn Uplink Orders New RCMP Remote Panels

Hi-Net, Holiday Inn's commercial insert and movie playback joint venture in Memphis, Tenn., has purchased Alamar RCMP Remote Control Panels to handle remote access of all machines including VTRs and switchers.

Software Solutions for Media, Scheduling and Traffic

Alamar's Media Manager is a software program that offers TV news departments and production facilities a comprehensive, inexpensive way to catalog film and videotape programming. The Schedule Manager creates daily logs and downloads them to the MC-1050. And the Traffic Manager lets the MC-1050 download files from

existing in-house traffic systems. All software is IBM XT/AT compatible. It adds up to real hardware and software automation and integration. And it's all from Alamar. The company is headquartered at 36 Railway Avenue, Campbell, Calif., 95008. Telephone is (408) 866-9373.

Technology So Advanced



We Created A Dynasty of 30, 40, 60, and 100 MHz. Switches

DYNASTY. The only switches that make obsolescence a thing of the past. Now, ask yourself, "Why"?

- Why can DYNASTY offer 30 MHz performance at 10 MHz prices?
- Why does DYNASTY offer backward compatibility?
- Why does DYNASTY have unique "Adjustment Free" modules?
- Why can DYNASTY upgrade my existing system to 100 MHz?
- Why can you field upgrade DYNASTY without special tools?
- Why does DYNASTY use custom PCB Baluns?
- Why can DYNASTY expand to 1000 x 1000?

- Why does DYNASTY use proprietary Laser Trimmed Hybrids?
- Why does DYNASTY require no special ventilation?
- Why can DYNASTY switch Computer Graphics signals?
- Why does DYNASTY reduce maintenance costs and system down-time?
- Why does DYNASTY grow with my future switching needs?
- Why can DYNASTY offer 100 MHz performance at about only twice the price of 10 MHz switches?
- Why is DYNASTY the only switch for you?

DYNASTY challenges you to get the answers to the questions that

will decide your switching future. DYNASTY meets your switching needs, for today AND tomorrow. Take the DYNASTY challenge and get the answers that you need to hear. Only from DYNASTY.

DYNASTY. Celebrating 30 years of "Value-Innovation" in switching technology.

**NATIONALLY CALL
1-800-854-2831
IN CALIFORNIA CALL
1-619-263-7711**

DYNASTY
Signals The Start of an Era
DYNASTY Electronics, Inc.
5275 Market Street
San Diego, CA 92114

Circle (45) on Reply Card

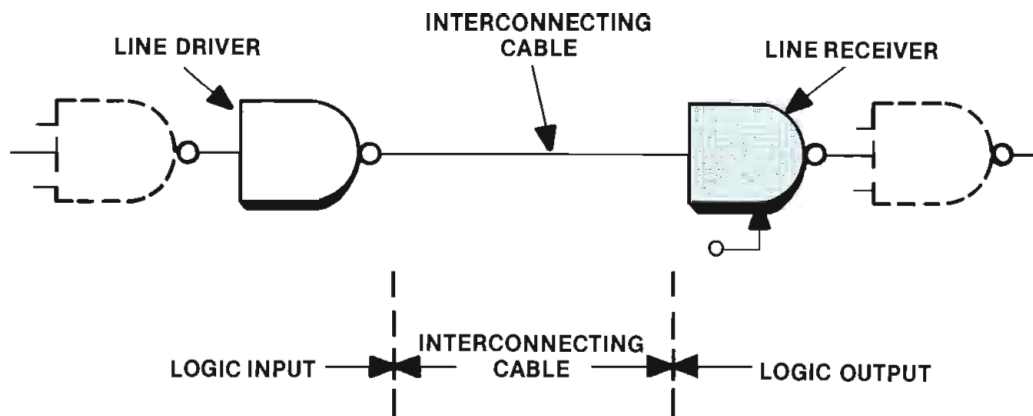


Figure 7. The most familiar of all serial data communications: RS-232.

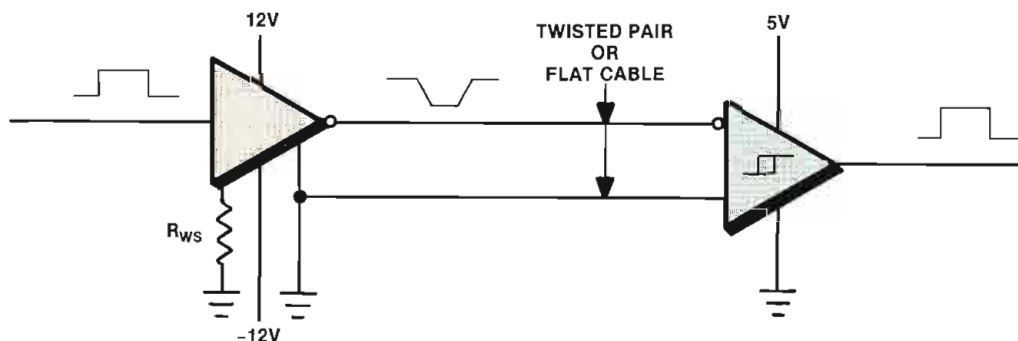


Figure 8. RS-423 communications forms a link between RS-232 and RS-422.

operating in the vicinity of the data link. Three items limit the application of RS-232 in high-speed serial data com-

munications. Because the specification limits the rate of change from one state to another (called *slew rate*) to reduce

noise radiation from the cable, the data rate is limited to 19,600 baud. This rate is too slow for most multidevice serial links. The nature of the RS-232 standard does not allow for party line data links, thus limiting RS-232 to dedicated or star data connections. The third limitation is distance. Although installations occasionally have RS-232 cable runs in excess of 50m, the standard specifies a maximum length of 15m.

Other standards

EIA standard RS-423 (see Figure 8) forms a link between RS-232 and RS-422. Like RS-232, this standard establishes a single-ended data link, a link that is effected with only one active wire and a signal return line such as a coaxial cable. The receivers are typically identical to those used in implementing RS-422 data links. Multiple receivers can be used, greater transmission speed is attainable and longer cable can be used. Data rates up to 100 kilobaud are possible with 50m of cable. More than 1km of cable can be used if the transmission rate is kept below 10 kilobaud.

The fact that the output of the driver is bipolar (a mark is -3Vdc to -6Vdc, while a space is +3Vdc to +6Vdc) complicates driver design. Standard inte-

Continued on page 68

HERE'S ALL YOU NEED TO USE OUR COUPLERS

It's easy to put your audio on the phone with Comrex® broadcast couplers. Just plug in the standard connectors and you're ready to go.

Two models are available. The Comrex TCB-2A auto-answer coupler makes "listen lines" a snap. The TCB-1A manual coupler lets you send or receive program without interfering with normal phone use.



Built specifically for broadcast, both are FCC registered. And both provide clean audio and the dependability you expect from Comrex.

Comrex also makes frequency extenders to turn raw dial lines into broadcast quality. For more information on any Comrex product, call toll-free 1-800-237-1776. Or write Comrex Corporation, 65 Nonset Path, Acton, MA 01720. Tel. (617) 263-1800. TWX 710-347-1049.



Circle (46) on Reply Card

COMREX

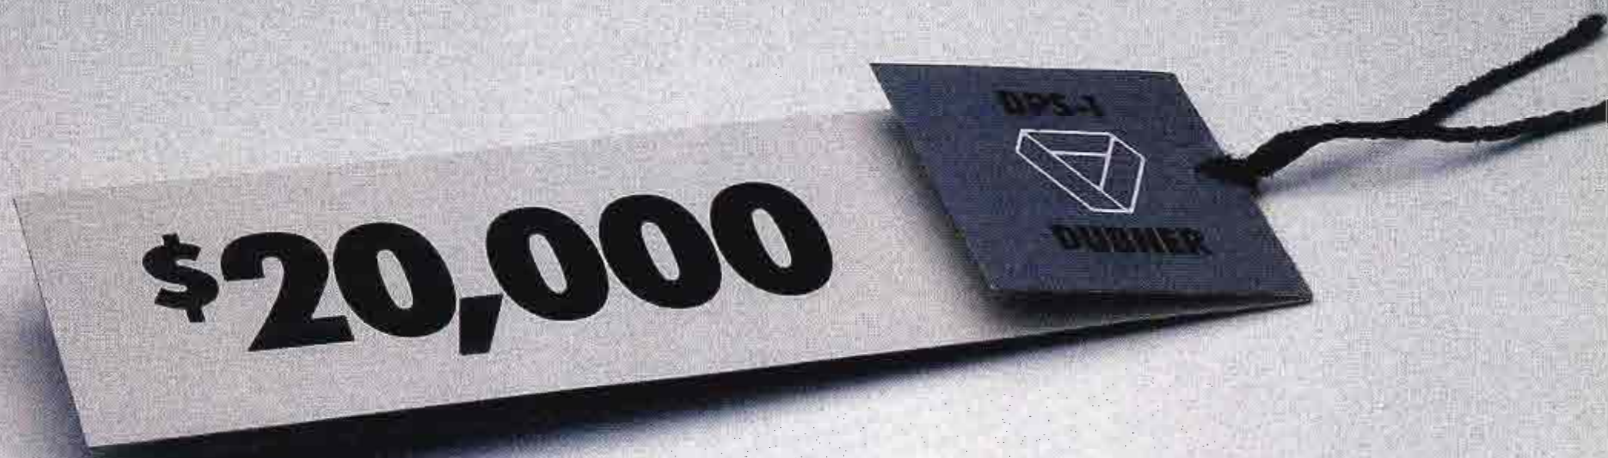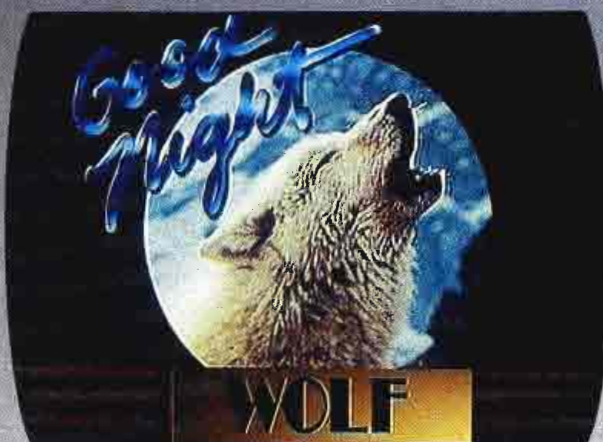

The only Painter that can display these kinds of graphics.

Dubner's DPS-1 Painter can store, paint and manipulate a frame of real video. All this and more for \$20,000.

Designed to meet the needs of broadcast, teleproduction, corporate and industrial users, the Painter also features: anti-aliased brushes, fonts and stencils; color and contrast correction; air,

solid, wash, fuzz, averaging, chalk, chrome, pattern and correcting brushes in 32 sizes with 100 transparency levels; millions of colors; X, Y, Z perspective mapping; 4-way color ramping; keying; posterizing; embossing; mosaic, magnify.

For more information on the DPS-1 Painter, call your authorized dealer.



DUBNER

DUBNER COMPUTER SYSTEMS, 6 Forest Avenue, Paramus, NJ 07652 USA (201) 845-8900 TWX 133-184 OFFICES: District of Columbia (301) 622-6313; Atlanta (404) 493-1255; Chicago (219) 264-0931; Minneapolis (612) 483-2594; Dallas/Fort Worth (817) 921-9411; Los Angeles (818) 999-2303; San Francisco (415) 968-6680. A Grass Valley Group Company.
(Top row, bottom left graphics) Courtesy of Advanced Video Services. Artist: Martin Pisano. (Bottom right graphic) Courtesy of TSC Video Post and Transfer. Artist: Randy Tede.

Circle (47) on Reply Card



Freeze.

Introducing the fastest, easiest way to get quality prints and slides from video.

Now you can capture the moment, freeze it, and frame it. All with the touch of a button.

With the new FreezeFrame Video Image Recorder from Polaroid.

FreezeFrame produces sharp, instant color prints and color or black and white 35mm slides from virtually any video source. And it delivers a finished picture that is far superior in quality and resolu-

tion to direct screen photography or thermal video image recorders.

If you use video, you need FreezeFrame.

FreezeFrame has hundreds of uses for anyone who uses video in their profession. It can be used in broadcast, production and advertising to proof, edit, storyboard or reference. It can be used to pull a

print off a just-breaking news story, or for color correcting a proof. It can even help in film-to-video transferring. Medical professionals can use FreezeFrame for diagnostic

recording, patient referral or teaching. And it's the easiest way to get slides or prints for presentations or training.

FreezeFrame can improve your image.
FreezeFrame



System includes Video Image Recorder, control console, and print film camera/adaptor. 35mm camera/adaptor optional.



Frame.

connects easily to video cameras, professional VCR's, laser disc players and computer graphics systems.

You can preview and even improve the video image because FreezeFrame has a full range of image enhancing controls including tint, contrast, color, sharpness, brightness and raster fill. And if you're shooting prints, FreezeFrame uses a new color print film specially developed for use with video imaging.

New FreezeFrame from

Polaroid. It's fast, easy, and at \$1,899*, very affordable.

To find out how FreezeFrame can help you, call toll-free 800-225-1618, 9 a.m. to 6 p.m. Eastern Time.

Or fill out and return the coupon. We'll give you the full picture and show you just how easy it can be to capture the moment on FreezeFrame.



Polaroid

For more information, mail this coupon to Polaroid Corp., Dept. 671, P.O. Box 5011, Clifton, NJ 07015.

☐ Please send more information.

☐ I'd like a demonstration.

BE 4/1

Name _____

Title _____

Organization _____

Address _____

City _____

State _____ Zip _____

Telephone _____

Video Source _____

Application _____

Circle (48) on Reply Card

*Suggested list price. "Polaroid" ® "FreezeFrame"™ © 1987 Polaroid Corporation

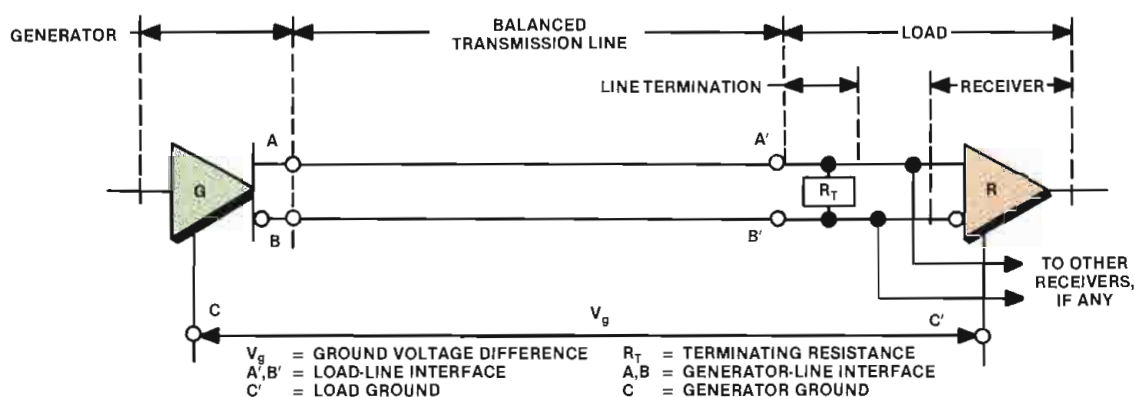


Figure 9. The RS-422 data link is ideally suited for use at a broadcast plant.

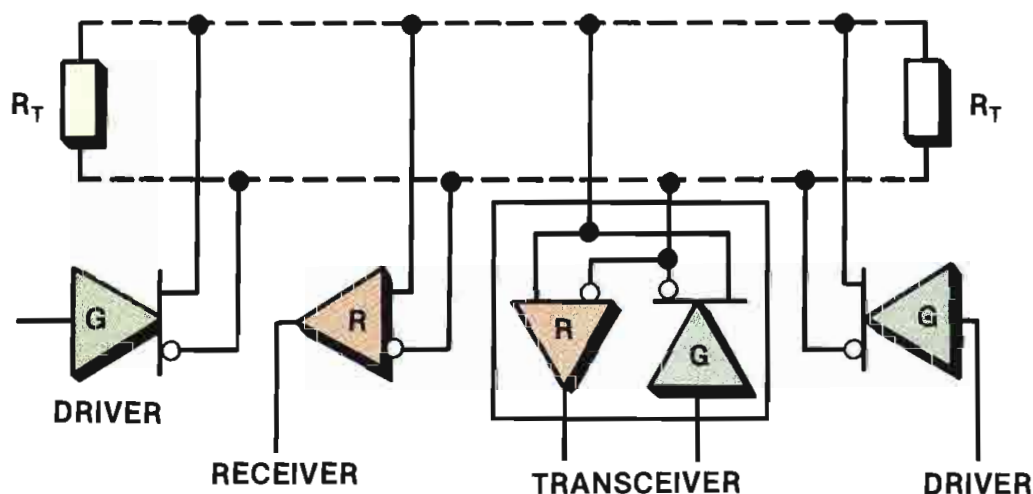


Figure 10. RS-485 is an EIA standard that addresses the party line environment.

Continued from page 64

grated circuits are available for RS-232 and RS-422 drivers. This often negates any advantage gained by using RS-423.

Whenever electrically noisy environments are encountered, the RS-422 standard should be applied to the data link. This type of data link uses a balanced twisted-pair cable (one in which both lines are actively driven) that is terminated in its characteristic impedance (100Ω for most data cable), as shown in Figure 9. Although the output is specified at -2Vdc to -6Vdc for a mark and +2Vdc to +6Vdc for a space, driving both lines to opposite voltage rails allows the system to operate from normal 5V logic power supplies.

Because one line is at the logic "low" voltage, and the other line is at the logic "high," the net output between the lines is a bipolar signal that is twice the voltage present on either line. This configuration is extremely tolerant of external electrical noise. Any noise is equally present in both lines while the receiver monitors the voltage difference between the lines ($\pm 200\text{mV}$ is the monitored voltage band). This allows for RS-422 serial links to operate reliably at 100-kilobaud rates at distances of more than 1km and at 1 Megabaud up to 100m. These long cable lengths, high data rates and high noise

You can measure...
with the best monitor and the most accurate test set.

The FMM-2/FMS-2 series monitors provide an even greater degree of precision measurement than ever before... **You can measure** S/N below 90 dB, **You can measure** crosstalk below 85 dB, **You can measure** separations of better than 70 dB, **You can measure** frequency response to better than 0.25 dB, **You can measure** distortions to lower than 0.01%, and much more... Our uncluttered panels and autoranging voltmeters make these measurements a dream.

BELAR CALL ARNO MEYER (215) 687-5550
ELECTRONICS LABORATORY, INC.
 LANCASTER AVENUE AT DORSET, DEVON, PENNSYLVANIA 19333
 Call or write for more information on Belar AM, FM, Stereo, SCA and TV monitors.

Circle (71) on Reply Card

THE DELTA PEDESTAL

TAKE THE STUDIO ON LOCATION

matthews
 STUDIO EQUIPMENT, INC.


(818) 843-715 * (212) 691-4720
 2405 EMPIRE AVE., BURBANK, CA 91504
 TELEX 691599 MATTHEW.

equipment

MACHINEWEG 22 * PHONE - (2945) - 3988
 1394 AV NEDERHORST DEN BERG, HOLLAND.
 TELEX: 10254 GRIMA NL.

Circle (72) on Reply Card

Strong as Sony.

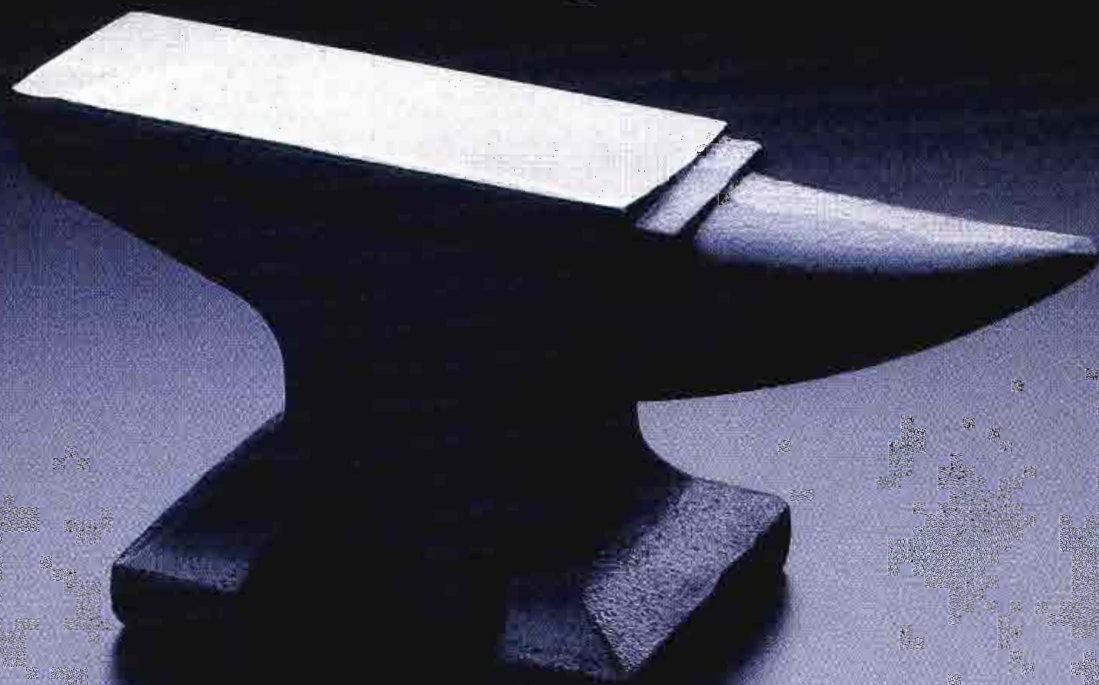

Introducing the tougher U-matic tapes from the inventors of tough tape.

Now U-matic® users have an even tougher new class of videocassette: Sony BRS and the extraordinary Sony XBR.

Both are produced in the U.S. with a dramatically improved Vivax™ formulation. And both have the new Sony anti-static shell and Carbonmirror™ back coating for a new level



of durability, runability and especially, fewer dropouts.

Thanks to Sony's latest advances in manufacturing and quality control, the new Sony XBR U-matic videotape promises the finest performance achievable.

You can count on "strong as steel" performance with both new Sony XBR & BRS... edit after edit after edit.

And that's why they're the only U-matic videotapes you can treat like a Sony.

SONY
THE ONE AND ONLY.

© 1987 Sony Corporation of America. Sony, Vivax, U-matic, Carbonmirror and The One and Only are trademarks of Sony.Circle (49) on Reply Card

immunity make RS-422 ideal for a high-speed serial data communications link.

According to the standard, RS-422 does not allow for more than one driver on a communications bus. This could be a major drawback. Many applications circumvent this limitation by using drivers that can be disconnected electrically from the circuit, thus allowing a party line data link to be implemented. A serious flaw with this approach is that if power is removed from a driver on the data link, the driver may short-circuit the bus and render the system inoperative.

As party line serial data systems have become extremely popular, the EIA has established the RS-485 standard, which addresses a party line environment (see Figure 10). This implementation is similar to an RS-422 application with several notable differences.

Multiple drivers and receivers may be connected to one data link (32 of any mix). Because multiple drivers present the possibility that more than one driver may accidentally be active at the same time, this type of fault will not destroy any transmitters. When power is re-

moved from a transmitter, that unit is electrically disconnected from the data link. The party line is terminated at both ends in its characteristic impedance to prevent signal degradation, so an RS-485 driver is more robust than a corresponding RS-422 driver.

This standard is sufficiently popular that integrated circuits are available from several manufacturers to implement receivers, transmitters, transceivers and bus repeaters. In fact, a greater range of types of circuits exists for RS-485 than for RS-422.

Transmission error detection

There are many sources of transmission errors in a high-speed serial data communications network. External or internal electrical noise spikes can mimic unwanted logic states. Faulty cables or connectors can cause bit dropouts or, in the case of a party line, multiple transmitters may be active at the same time.

There are three common techniques used in testing for serial data transmission errors: *parity*, *checksum* and *cyclic redundancy check*. Depending upon the probabilities of data transmission errors, these techniques can be used alone or in combinations.

The simplest error-detecting technique is incorporating an extra bit with each byte or word transmitted. This bit, called a *parity bit*, is used to set the total number of 1s in a bitstream to either an even amount (even parity) or to an odd amount (odd parity). Typically, if the data are transmitted as true binary bytes (all eight bits are significant), the parity bit is added to the datastream immediately following the related byte or word. If ASCII data are being sent, the parity bit traditionally is included as the eighth (most significant) databit of each transmitted byte.

The use of parity bits has the distinct advantage of determining a transmission error on a byte-by-byte basis, but this gain is offset by the added bit per transmitted byte. Another shortcoming of this technique is its failure to detect errors occurring in two (or any even number of) monitored databits.

When blocks of data are sent, a checksum can be added to verify proper transmission. A checksum is a byte determined by adding the equivalent unsigned value of each byte in the serial datastream. Unlike the parity technique, the checksum method can detect multiple-bit errors in a byte. However, errors in two or more bytes can cancel their effective contribution to the checksum and remain unprotected. This method, especially when used in conjunction with parity bits, usually reduces the possibility of undetected multiple-bit errors to an acceptable level.

When it is imperative that a trans-

NEW!

THE STEREO TV PROBLEM SOLVER by ADM...

The NEW ADM RM1010 switching matrix offers solutions to many of the problems associated with stereo audio. The RM1010 accepts a stereo input and redistributes it in the proper stereo format.

Stereo and Monaural are front panel selectable. And, the phase of the left channel can be reversed, which solves the "monaural sum" problem associated with "out-

of-phase" stereo program material. A stereo monitor circuit, stereo analog metering, a line level output with level control and a front panel stereo headphone jack permit precise level control and output balancing.

The RM1010... another example of the quality, reliability and performance that makes it possible for ADM to offer the exclusive 5 year warranty on parts and labor.




Contact ADM, your regional manager or audio distributor.

ADM[®]

ADM Technology, Inc.
1626 E. Big Beaver Road, Troy, Michigan 48064
Phone: (313) 524-2100 TLX 23-1114

Circle (39) on Reply Card

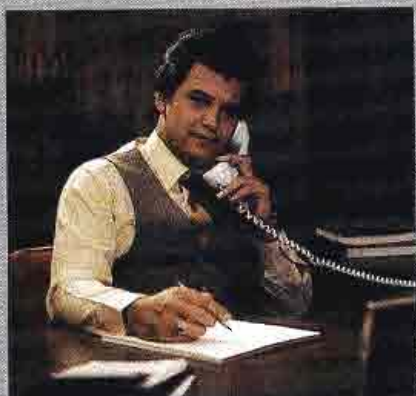

**Hector Munoz,
Distribution Services
Manager**

"Our purpose is to keep you on the air."

Our extensive inventory of broadcast tubes, RF transistors and related components ensures delivery of the product to you on time—even if I have to run the package to the airport myself. Last year our company made over 7500 overnight deliveries, so we take emergencies seriously!"



***\$30 Million Inventory—
98% Same Day Shipment***



***Technical knowledge to
help you save time and
money by choosing the
right component.***



PRODUCTS: Cathode Ray Tubes ■ Diodes ■ Klystrons ■ Monitor Tubes ■ Plumbicon® Tubes ■ Receiving Tubes ■ RF Ceramic Capacitors ■ RF Transistors ■ Saticons ■ Solid State Replacements ■ Transmitter/Power Tubes ■ Tube Sockets ■ Accessories ■ TV Linear Devices ■ Vacuum Capacitors ■ Vidicons ■ Vistacons
MANUFACTURERS: Acrian ■ Amperex ■ Cetron ■ EEV ■ Eimac ■ GE ■ Hitachi ■ ITT ■ Jennings ■ Machlett ■ National ■ Philips ■ RCA ■ Raytheon ■ Thomson ■ CSF ■ Varian ■ Westinghouse



800-323-1770

Circle (51) on Reply Card

Richardson Electronics, Ltd.

Broadcast Division—Calvert Electronics, Inc

Convenient Sales Offices: Franklin Park, IL ■ Woodland Hills, CA ■ Belmont, CA ■ Dallas, TX ■ Norwell, MA ■ Rockville Centre, NY ■ East Rutherford, NJ ■ Winter Park, FL ■ Brampton, Ontario, Canada ■ Lincoln, England ■ Gennevilliers, France

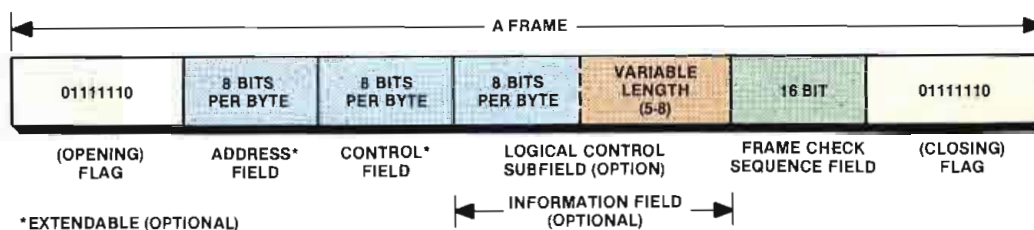


Figure 11. HDLC (high-level data link control)/SDLC (synchronous data link control) communications protocol.

mission error be detected, a cyclic redundancy check (CRC) word rather than a checksum is appended to the datastream.

This technique generates a binary word via a polynomial rather than simple addition. The possibility of an error remain-

ing undetected using a CRC word is extremely small. Obviously, this check work is fairly complex to derive. It is fortunate that integrated circuits are available to automatically generate and verify the CRC. Many communications ICs incorporate this feature internally.

Communications protocols

The key aspect of any serial data communications system is to deliver meaningful information from one point to another. The actual communications protocols determine how the individual units of the system will interact with the other units it operates. There is no firmly established, complete set of protocols, unfortunately, that addresses the needs of a high-speed serial data link as would be required by the broadcast industry.

There are several standards that specify what general format is to be followed and can be used as a guideline. As an example of some items that should be considered in a communications protocol, the HDLC/SDLC conventions are described as follows:

The HDLC (high-level data link control) and the SDLC (synchronous data link control) are effectively the same for this discussion and will be referred to as HDLC. The HDLC protocols specify only the data format of the serial data; they do not specify the electrical characteristics of the data link or the encoding technique, except that asynchronous encoding is inherently disallowed.

A typical HDLC datastream is shown in Figure 11. To indicate a valid datastream in progress, a *flag* byte is transmitted. This byte has a unique binary format of 01111110. The second byte of the stream is the address of the device being referenced. Following this is the byte used to determine the actual command involved. The specific additional data required are transmitted after the command byte. (Note: HDLC is a bit-oriented protocol and is adaptable to any data field width).

Completing the transmitted packet (called a frame) is a 16-bit CRC word. An additional *frame* byte is used to indicate the actual end of the data frame. To prevent transmitted data from mimicking a frame byte, any serial data sequence of five 1s forces a 0 to be inserted into the datastream. The extra 0 is automatically removed at the receiver. It is this zero insertion that makes HDLC ideal for NRZI encoding.

The HDLC protocol indicates the needed data in the order they would be used. The address field indicates which device must monitor the balance of the message. The command indicates the course of action that must be followed and the pertinent data follow with a powerful error-detection scheme incorporated in the transmission.

Hearing out of focus?



Solved: stereo phase errors

How? By using the Howe Audio 2300 Phase Chaser you can correct phase errors in stereo signals which cause problems in mono compatibility and stereo imaging.

The 2300 Phase Chaser detects and corrects phase inversion, time delay and channel dropout. Additional features include a clip indicator, 180° phase inversion

indicator, phase error indicator scaled in millisecond, bypass switch, XLR input/output connections and 1 3/4" X 19" rack mount.


For more information contact Howe Audio, 2300 Central Avenue, Suite E, Boulder, Colorado, 80301, (800) 525-7520.

See us at NAB, booth #2832.

 **HOWE**

Circle (115) on Reply Card

The World's First
4:22 Telecine

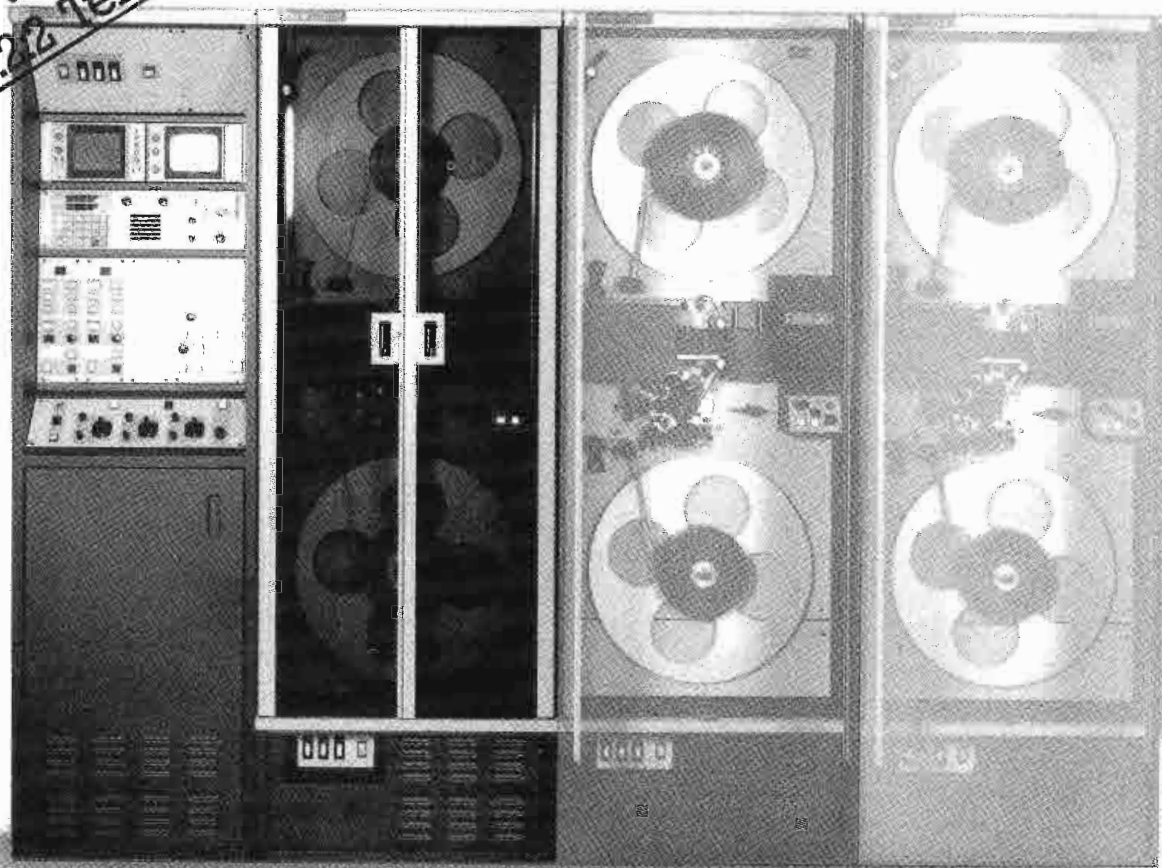

The no hassle broadcast telecine

ADS 1 Advanced Digital Scanner

With ADS 1, Rank Cintel has applied its unique film-scanning experience to the specific needs of the broadcaster.

Developed in close co-operation with the British Broadcasting Corporation (BBC), this CCD multiplexed broadcast-telecine is designed for easy 'on-air' operation and transfer of film to tape prior to transmission.

The incorporation of solid-state imaging technology is an example of Cintel's continuing development philosophy.

Latest component technology, cost-conscious design and modern manufacturing techniques have been

exploited, without compromising performance and reliability. The result is a telecine system which is technically advanced while at the same time being economical to operate. That is not all, ADS 1 also features a unique electronic dirt and scratch concealment system. Add all this together and you have the ideal broadcast-telecine package.

**Take the hassle out of film
broadcasting — call us at
914-353-1914.**



Rank Cintel Inc. East Coast
New York 10994, U.S.A.
260 North Route 303, West Nyack,
Tel: 914-353 1914 Telex: 726441




Rank Cintel

Rank Precision Industries Inc. 411 East Jarvis Avenue, Des Plaines, Chicago, Illinois 60018, U.S.A. Tel: 312-297 7720 Telex: 646998 Fax: 312-6990581

West Coast
13340 Satcoy Street, North Hollywood,
California 91605, U.S.A.
Tel: 818-765 7265 Telex: 182694 RPI LSA
Fax: 818-765 3315

Circle (52) on Reply Card

7000et



415 East St. Elmo Rd. • P.O. Box 3610 • Austin, Texas 78764 • 512-444-1961 • 800-531-5412 • TELEX 767119

ACOUSTIC SYSTEMS
MODULAR STUDIOS
for broadcast control,
production,
recording,
on-air

Remote control with the ESBUS

By Douglas A. Hurrell

The broadcast industry has long been searching for a set of standards for the remote control of broadcast equipment. Now that digital control logic and microprocessors have become commonplace in broadcast equipment, it is no longer necessary to contend with relay closures and unusual voltage swings to remotely control a VTR or switcher.

These microprocessors provide each interface with a certain amount of "intelligence" of its own. This use of distributed intelligence offers a number of benefits to the broadcaster. Each set of broadcast hardware has its own idiosyncrasies and smart controllers can receive standard "vanilla" messages that will allow even vintage broadcast equipment the luxury of remote control. In addition, this distributed intelligence provides a high degree of resilience because failures generally are confined to one piece of equipment.

Manufacturers in increasing numbers started using serial RS-422 as an interface medium for remote control. Serial communications provided an easier method of remote control at generally lower cost with better error message response characteristics. Although RS-422 was a common hardware means of communication, everyone seemed to be talking a different language (protocol), and sometimes even at a different rate of speed (baud).

SMPTE created a committee in 1978 to work toward a remote-control standard. In 1979, the European Broadcast

Union (EBU) undertook a similar task. In 1981, the two groups joined efforts and have produced a complete architecture for remote control of TV systems, known as the *ESbus*.


The *ESbus* is an applications-oriented bus that has gained wide acceptance within the broadcast community. It consists of a series of basic functional units that form a network. Each piece of broadcast equipment includes or is connected to a *tributary*. The tributary can be either a *controlling* device, such as a control panel or automation system, or a *controlled* device, such as a VTR or switcher. Each tributary has its own distinct address, and is responsible for detecting error messages and delivering control messages to and from the controlled equipment.

The *bus controller* supervises each tributary on a regular basis to determine whether any further communications are necessary. The *interface bus* is an RS-422 hardware interconnect that carries the messages between tributaries and the bus controller at 38.4kb/s. A *gateway* is available to interconnect each local network to the *interconnection bus* so that messages may be transferred among tributaries on different networks.

The ESBUS

The *ESbus* was structured according to the principles established by the International Standards Organization (ISO). Four layers are specified for the *ESbus*:

- *Electrical/mechanical*: The lowest layer specifying the electrical and mechanical characteristics of the commu-

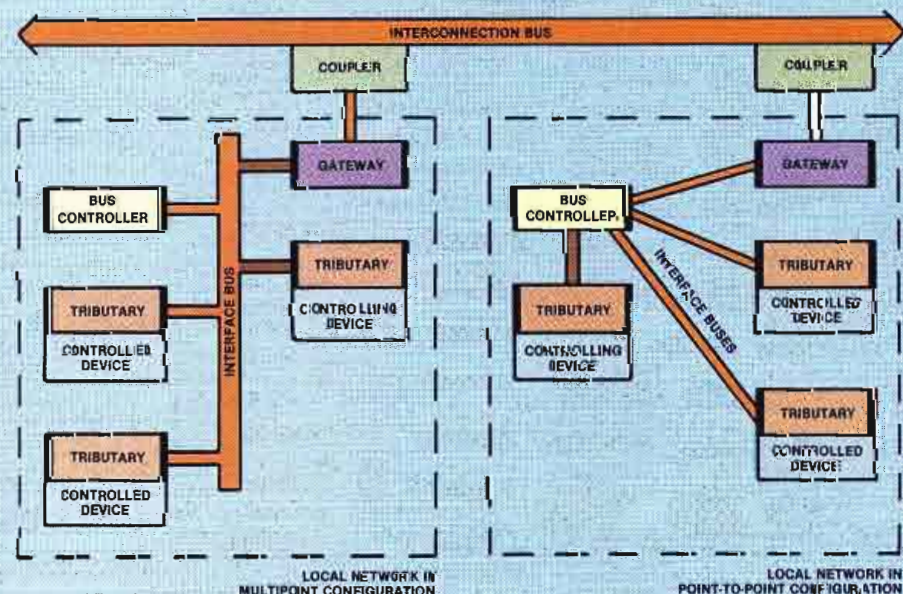

Typical ESBUS interconnection does not specify couplers or controlled devices. Only the elements outlined in heavy lines are within the scope of the specification.

Hurrell is president of Aamar Electronics, Campbell, CA.

nications channel.

- **Supervisory:** This layer provides access to the communications channel and guarantees error-free delivery of messages.

- **System service:** This layer provides routing of messages among tributaries, identification of the type of equipment connected to a tributary, and the blocking/deblocking of long messages.

- **Virtual machine:** This layer responds to control messages in a defined manner regardless of the type of physical equipment connected to the tributary. An important feature of this layer in the EBus is the capability to execute control messages on a system time line.

Detailed information regarding these layers is available in the following documents from SMPTE:

- ANSI/SMPTE 207M—Electrical and Mechanical Specifications
- SMPTE RP-113—Supervisory Protocol
- SMPTE RP-139—Tributary Interconnect (system service)
- SMPTE RP-138—Control Message Architecture (virtual machine)

The EBU has approved and published a single specification for all four layers of the system, EBU Tech. 3245—Specification of a Remote Control System for Broadcasting Equipment.

Manufacturers have adopted a number of different technologies to address the issues of remote control and automation. The EBus has received international acceptance with the inclusion of the EBU and Eastern bloc countries.

Broadcasters must carefully determine whether the control equipment (such as remote panels or automation controllers) answers the overall needs of their particular applications. The control bus determines only the way in which a command gets from point A to point B. The decision regarding implementation of a specific control bus is secondary to that of control equipment but has far-reaching implications regarding flexibility and the capability for future expansion.

As the manufacturing community closes ranks around this industry standard, more and more broadcasters are integrating with the EBus.

1:1-)))

UPGRADE YOUR ENG SYSTEM WITH MII



If you use 1/2", 3/4" or any combination, switch to MII and get high performance and overall cost reductions.

The MII Broadcast System is designed to enhance your ENG operations. With product like the AU-400 Camera Recorder that offers a combination of performance and capabilities never before available on 1/2".

Like multi-generation capability, playback through the view-finder, 4-channel audio, on-board time code generator/reader with selectable user bits and over 20 minutes of recording time on a compatible compact cassette. Even 90 minutes of operation with the MII Field Recorder, Field Editing and Studio VTR's. Plus performance of such high quality it can be used as an alternative to 1" C.

And with MII you have low maintenance and training costs. Tape consumption is dramatically reduced. Units are small and lightweight. Cassettes and parts inventory are interchangeable. And MII equipment is 100 percent compatible, so you can interface MII with your present system.

What's more, product is available now.


Find out how you can improve your production quality and cut your overall costs with the Panasonic MII Broadcast System.

For more information call
(201) 348-7671.



Panasonic
Broadcast Systems

Circle (53) on Reply Card

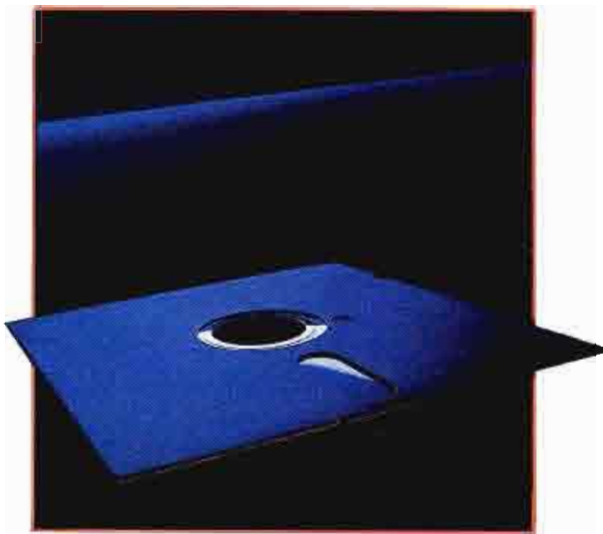

Planning for engineering automation

By Joseph P. Geerling

An electronic assistant may be the key to operating an engineering department efficiently.

Most engineers probably would like to have an assistant. Convincing the station manager to hire one, however, is a completely different matter. After all, don't assistants cost a lot of money, occasionally call in sick, want vacations and even question your decisions? Believe it or not, an assistant may be available who has none of these shortcomings.

Bringing this new assistant to your station would be quite inexpensive, compared with what it would cost to keep most full-time personnel on the payroll. This assistant will not catch a cold, ask for time off or criticize your judgment. In fact, this assistant is almost guaranteed to follow your commands right down to the letter.

High-tech help

By now you probably have realized that the assistant we're talking about is not another human being. Rather, many engineering functions can be met by a computer and appropriate software.

Today's engineer is faced with increasing time demands. The station manager wants a budget report. The program director wants to know whether it's possible to carry a live remote from a city 35 miles away. Finally, you have your own set of needs that might include correspondence, documentation on projects or even preparing graphs and charts.

Computers may be helpful for many of these everyday tasks. Computers can become a powerful typewriter, providing

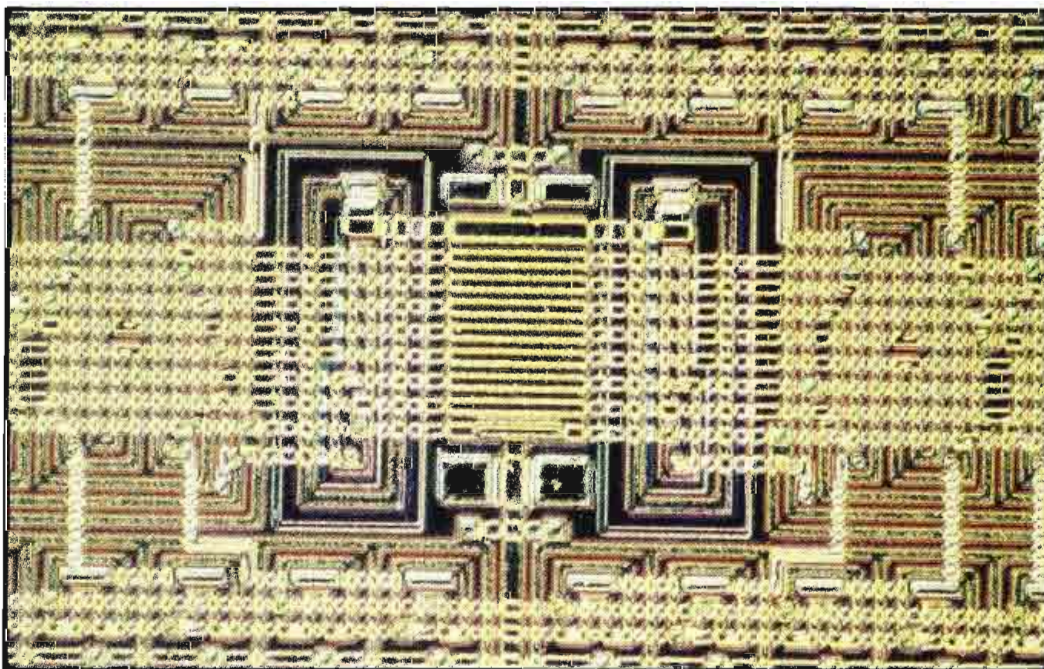


Photo by Timothy Scheffer

Few industries have affected the design of broadcast equipment more than the semiconductor industry. Integrated circuits have revolutionized broadcast hardware, making it smaller, lighter and more reliable.

Geerling is chief engineer at KWMU-FM, St. Louis.

printouts of reports, memos, graphs and mailing labels. They can calculate with lightning speed. When coupled with a spreadsheet program, computers can help examine any number of variables within a project. A database program provides storage and quick retrieval of information. Want the database sorted by fields? Need a special report consisting of only part of the database information? With today's programs, these tasks are easy to accomplish.

Integrated programs

Computer application software is available in two general formats: stand-alone and integrated. A stand-alone program is designed to function by itself. It performs a task without trading information with other programs. In fact, it may not be able to easily exchange data with other programs.

Although many stand-alone programs may be feature-laden and low in cost, the inability to work in tandem with other programs can be a disadvantage. For instance, suppose you have developed a database of names and addresses and want to develop a form letter. If the database lacks a sophisticated word processor or cannot easily exchange the information with one, you may have to manually enter the data into the letters.

An integrated program offers several functions: word processing, spreadsheets, graphics and telecommunications together in the form of subprograms.

The difference between using an integrated program and using separate programs for each function lies in the ease with which data can be shared by the various subprograms. For example, with an integrated program, you can easily create a budget and play "what if" games to examine different possibilities. Portions of the information can then be graphed and included in a report. The entire document can be transmitted later to almost anywhere via the telephone. To accomplish the same task with stand-alone programs typically requires copying the information to each subprogram. Integrated programs eliminate this need.

Choosing a program

There are five basic subprograms engineers should look for in an integrated software package. Each program plays a vital role. The *spreadsheet* or worksheet performs calculations and "what ifs." The *graphics* program translates the data into charts or graphs. The *word processor* creates letters and reports, which can include the charts or graphs. The *database* can sort and store huge amounts of information for mailings, diagnostics or reports. The *communications* program facilitates the transfer of information to other computer systems.

STANDARDIZE YOUR EFP SYSTEM WITH MII



If you use 1/2", 1" or any combination, switch to MII and get high performance and overall cost reductions.

The MII Broadcast System was designed to enhance your EFP operations. With product like the AU-500 Field Recorder that offers a combination of performance and capabilities never before available on 1/2".

Like over 90 minutes of recording time even in the field, multi-generation capability, field color playback, 4-channel audio, on-board time code generator/reader with selectable user bits and TBC connection. The Field Recorder also accepts compact cassettes from the MII Camera Recorder. Plus MII's performance is of such high quality it can be used as an alternative to 1" C.

And with MII you have low maintenance and training costs. Tape consumption is dramatically reduced. Units are small and lightweight. Cassettes and parts inventory are interchangeable. And MII equipment is 100 percent compatible, so you can interface MII with your present system.

What's more, product is available now.

Find out how you can improve your production quality and cut your overall costs with the Panasonic MII Broadcast System.

For more information call (201) 348-7671.



Panasonic
Broadcast Systems

Circle (55) on Reply Card

CASP will
Charge & Analyze

ANY Battery and Faster

New software in Christie Electric Corp's CASP make it instantly compatible with ANY battery. CASP is now the only truly universal charger/analyzer/sequencer/power supply.

One software program will accommodate ANY battery. You will never need software updates or custom software to be able to service *any* manufacturers' product.

CASP will charge & analyze ANY battery in *Record Time*.

ANY MANUFACTURER *Faster*

- Anton/Bauer
- Alexander
- Christie
- Frezzolini
- Pag
- Panasonic
- PEP
- Perrott
- Sanyo
- Sony
- and ALL others

ANY Battery and Faster



CHRISTIE
ELECTRIC CORP.

20665 Manhattan Pl.
Torrance, CA 90501 USA
213-320-0808 800-421-2955
TWX 910-349-6260

Circle (56) on Reply Card

Engineering Formulas and Conversions Worksheet					
Convert Power to dBk	Power in	dBk			
Enter Power in	100,000	20			
Enter dBk	3,981	6			
Wavelength	Frequency (MHz)	Feet	Meters		
	97.1	10.13	3.09		
Free Space Attenuation	Frequency (GHz)	Distance (mi)	Atten (dB)	Dist (km)	
	0.9515	8	114.23	5.0	
Coax Cable Attenuation	Tx Length =	215	Rcv Length =	60	
		Tx Atten	Rcv Atten	Total	Efficiency
AT 950 MHz	LDF4-50 1/2"	5.59	1.56	7.15	19.28
	LDF5-50 7/8"	3.23	0.90	4.12	38.68
	LDF7-50 1- 5/8"	1.94	0.54	2.48	56.56
	Tx Length =	465	Rcv Length =	0	
		Tx Atten	Rcv Atten	Total	Efficiency
AT 100 MHz	HJ7-50 1-5/8"	1.05	0.00	1.05	78.59
	HJ8-50 3"	0.70	0.00	0.70	85.16
	HJ11-50 4"	0.51	0.00	0.51	88.89
STL Path Evaluation					
Tx Power Out (watts)	10.00				
Tx Antenna Gain (dBi)	22.00	6 foot grid			
Receive Antenna Gain (dBi)	13.50	existing			
TOTAL Gain	75.50				
Tx cable loss	3.23	7/8 inch			
Recv cable loss	1.56	existing			
Connector Loss	0.50				
Path Loss	114.23				
Other Losses	0.00				
Grazing Factor	1.75				
TOTAL Losses	121.26				
		dB	µV		
Effective Received Signal	-45.76	1151.4			
Min Sig for 60dB S/N	74.95	40.0			
Fade Margin	29.18				
dB to µV	71.47	59.7			
µV to dB	83.47	15			

Figure 1. A spreadsheet, such as the one shown here, can contain complex formulas and data. This one allows an STL path analysis to be performed in a couple of minutes.

Account	Description	January		February		March	
		Budgeted	Actual	Budgeted	Actual	Budgeted	Actual
1212	Tube Expense	0.00	0.00	1750.00	1732.00	0.00	0.00
1213	Transmr Bldg Maint	75.00	68.00	75.00	68.00	75.00	68.00
1214	Equip Parts and Supplies	50.00	161.00	50.00	27.00	50.00	72.00
1215	Tape Expense	120.00	55.00	120.00	240.00	120.00	110.00
1218	Publications	28.00	28.00	28.00	28.00	28.00	28.00
1220	Computer Expense	17.00	0.00	17.00	18.00	17.00	0.00
1223	Tower Expense	0.00	0.00	0.00	0.00	325.00	275.00
1224	Paging	19.00	19.00	19.00	19.00	19.00	19.00
1229	Misc	50.00	65.00	50.00	32.00	50.00	78.00
1235	Travel & Entertainment	0.00	18.00	0.00	0.00	0.00	27.00
1236	Conventions & Seminars	0.00	0.00	0.00	0.00	600.00	575.00
1237	Van Expense	256.00	262.00	256.00	227.00	256.00	232.00
TOTALS		\$615.00	\$676.00	\$2,365.00	\$2,391.00	\$1,540.00	\$1,484.00
		Deviation:	61.00	Deviation:	26.00	Deviation:	(56.00)

Figure 2. Budgets and financial reports are natural applications for spreadsheets.

When selecting an integrated software package, the most important thing to keep in mind is the program's capability to perform your specific tasks. Your local computer dealer can suggest appropriate programs, and should be able to arrange

for a hands-on software demonstration.

Perform a few simple tests. Try typing a short letter that will be merged with a mailing list. Then, using a database program containing multiple names and addresses, see how complex it is to create

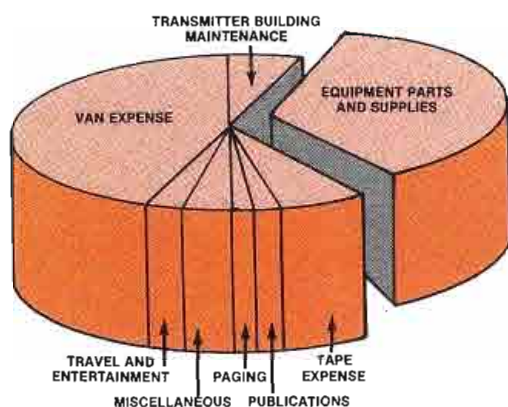


Figure 3. This pie chart pictorially depicts the data contained in the spreadsheet shown in Figure 2.

customized form letters. Try entering numbers and calculations into the spreadsheet. Note how the spreadsheet recalculates the totals when one of the variables is changed. Finally, print out a copy of the spreadsheet, just to see how it looks.

Keep in mind that your computer system is a tool and must be viewed as a complete package. Just as a socket set is useless without its ratchet, an integrated program must have all the tools to do its job. An extra disk drive, a letter-quality printer with extra-wide paper capability and a modem may be required to take full advantage of the program's capabilities.

Purchasing an integrated program instead of separate stand-alone programs may save money and increase efficiency because of the ease of transferring data between the functions. Although integrated packages often require more memory and disk space than individual programs, the benefits usually outweigh these disadvantages.

The program's capabilities, not the brand of computer or software, are the critical considerations in choosing a system. Some programs can exchange database, spreadsheet and text information among different types of computers. This means that if your station already has a computer system, you may be able to share that information.

Applications

Figure 1 shows a section of a spreadsheet used to evaluate an STL path. Formulas and figures are entered into each cell, and cells in the spreadsheet can be interrelated. Because the value of one cell can be dependent upon the values of other cells, many possibilities can be examined. For instance, what happens if you use a larger antenna and smaller coax? If you change the desired cell values (in Figure 1) for antenna gain and coax loss, within a second or two the program will recalculate the results based upon these new parameters.

Loan amortizations, budgets, load cal-

SUBSTITUTE YOUR STUDIO VTR'S WITH MII



If you use 1", switch to MII and get high performance and overall cost reductions.

The MII Broadcast System was designed to enhance your studio production. With product like the MII AU-650 Studio VTR that offers a combination of performance and capabilities never before available on 1/2".

Like over 90 minutes of recording time, multi-generation capability, on-board TBC and time code generator/reader with selectable user bits, editing functions, variable speed playback including slow and still, Dolby*-C noise reduction, and 4-channel audio. The Studio VTR also accepts compact cassettes from the MII Camera Recorder. Plus MII's performance is of such high quality it can be used as an alternative to 1" C.

And with MII you have low maintenance and training costs. Tape consumption is dramatically reduced. Units are small and lightweight. Cassettes and parts inventory are interchangeable. And MII equipment is 100 percent compatible, so you can interface MII with your present system.

What's more, product is available now.

Find out how you can improve your production quality and cut your overall costs with the Panasonic MII Broadcast System.

For more information call (201) 348-7671.



Panasonic
Broadcast Systems

*Dolby is a trademark of Dolby Laboratories, Inc.

Circle (57) on Reply Card

Future remote-control systems

It's just starting to happen. Microprocessor-based remote-control systems are beginning to demonstrate their potential in the broadcast industry. Although today's remote-control systems may seem feature-limited, they already have come a long way toward providing expanded features in controlling broadcast sites.

A wish list

Here is a list of additional features broadcast remote-control manufacturers might consider:

- It is unlikely that any single manufacturer could develop a comprehensive system that could not be enhanced by the addition of other vendors' accessories. Therefore, future remote-control systems must be complete systems. That is, these systems should possess all the components necessary to run a remote site, yet be expandable with accessories and software developed by independent vendors and engineers.
- Future remote-control systems should be able to communicate with a separate PC or dumb terminal using simple ASCII codes. Special terminals should not be required to send and receive data or to access subprograms.
- The remote control's communications interface should allow the station to use an auto-answer modem for periods when the normal control link is lost or when the system will be checked from other remote locations (such as an engineer's home).
- Future systems also should include security codes permitting only authorized access.
- Tone control and voice synthesis response are two areas that could be developed and improved upon by independent vendors.
- Tomorrow's control system must be able to take constant snapshots of all conditions and securely store the data in case of a failure. These readings should be stored in a non-volatile memory and be available for printout or transmission via modem.
- Status and analog channels should be expandable to fit the needs of many stations. Such flexibility could help reduce the concern a station might have about future growth.

Microprocessor technology is now capable of handling multiple monitoring and decision-making tasks. When broadcast remote-control systems begin taking full advantage of this technology, they finally will address the engineer's goals of reliable operation, positive control and comprehensive reporting.

FM Performance Data Sheet				FM Noise		-72
Test Date: Dec 8, 1985				AM Noise		-50
All response data in dB				L Ch Noise		-61.5
All distortion data in percent				R Ch Noise		-60.5
				Tests by: JG		
Freq	Left Channel			Right Channel		
100%	Gen Out	Resp Dev	Dist	Gen Out	Resp Dev	Dist
50	29.2	3.4	0.55	29.4	3.6	0.42
100	28.4	2.6	0.40	28.4	2.6	0.32
400	25.8	0	0.33	25.8	0	0.38
1000	26.7	0.9	0.40	26.7	0.9	0.50
5000	35.3	9.5	0.45	35.2	9.4	0.42
10000	42.5	16.7	0.70	42.1	16.3	0.80
15000	45.9	20.1	1.35	45.4	19.6	1.40
50%						
50	36.2	-3.7	0.46	36.4	-3.8	0.42
100	35.3	-2.8	0.41	35.3	-2.7	0.40
400	32.5	0	0.30	32.6	0	0.30
1000	33.6	-1.1	0.34	33.7	-1.1	0.39
5000	42.3	-9.8	0.63	42.1	-9.5	0.68
10000	49.6	-17.1	1.75	49	-16.4	1.50
15000	52.9	-20.4	1.50	52.3	-19.7	1.70
25%						
50	44.5	-3.5	0.72	36.4	-10.6	0.74
100	43.5	-2.5	0.61	35.3	-9.5	0.60
400	41	0	0.53	32.6	-6.8	0.55
1000	42	-1	0.62	33.7	-7.9	0.57
5000	50.5	-9.5	1.35	42.1	-16.3	1.40
10000	58	-17	2.55	49	-23.2	2.50
15000	61	-20	>3	52.3	-26.5	>3

Figure 4. Proof-of-performance data entered into a spreadsheet can be used for written documentation or charts.

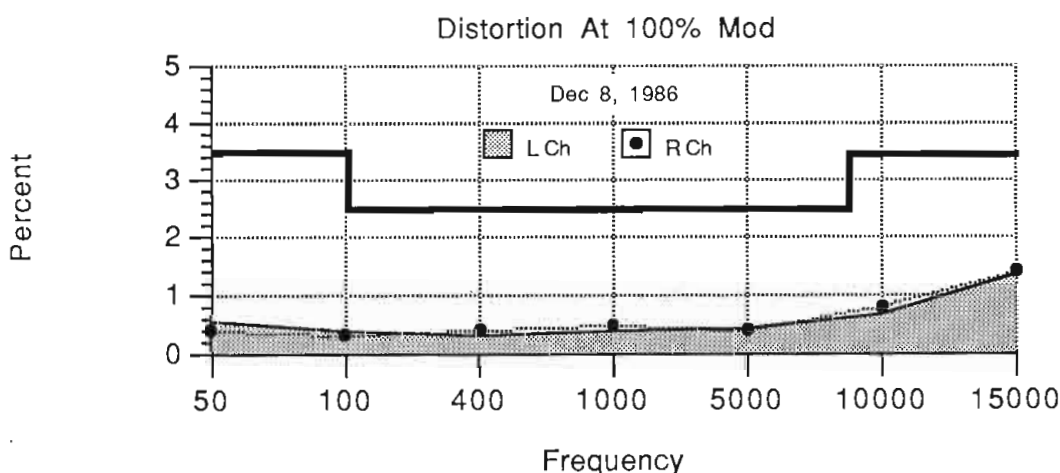



Figure 5. This graph was developed using the values from the spreadsheet in Figure 4. Such a chart has a great deal of visual impact.

culations, distance between two coordinates and other routine engineering calculations can be included on one spreadsheet if desired. As you use the spreadsheet (often called a worksheet), you will

discover new applications.

Figure 2 shows how monthly budgeted and actual expenses might be displayed on a worksheet. The pie graph in Figure 3 is based on the data in Figure 2. Graphs

ADD 4 NEW STUDIOS FOR DIGITAL AUDIO POST-PRODUCTION... WITHOUT BUILDING A SINGLE WALL

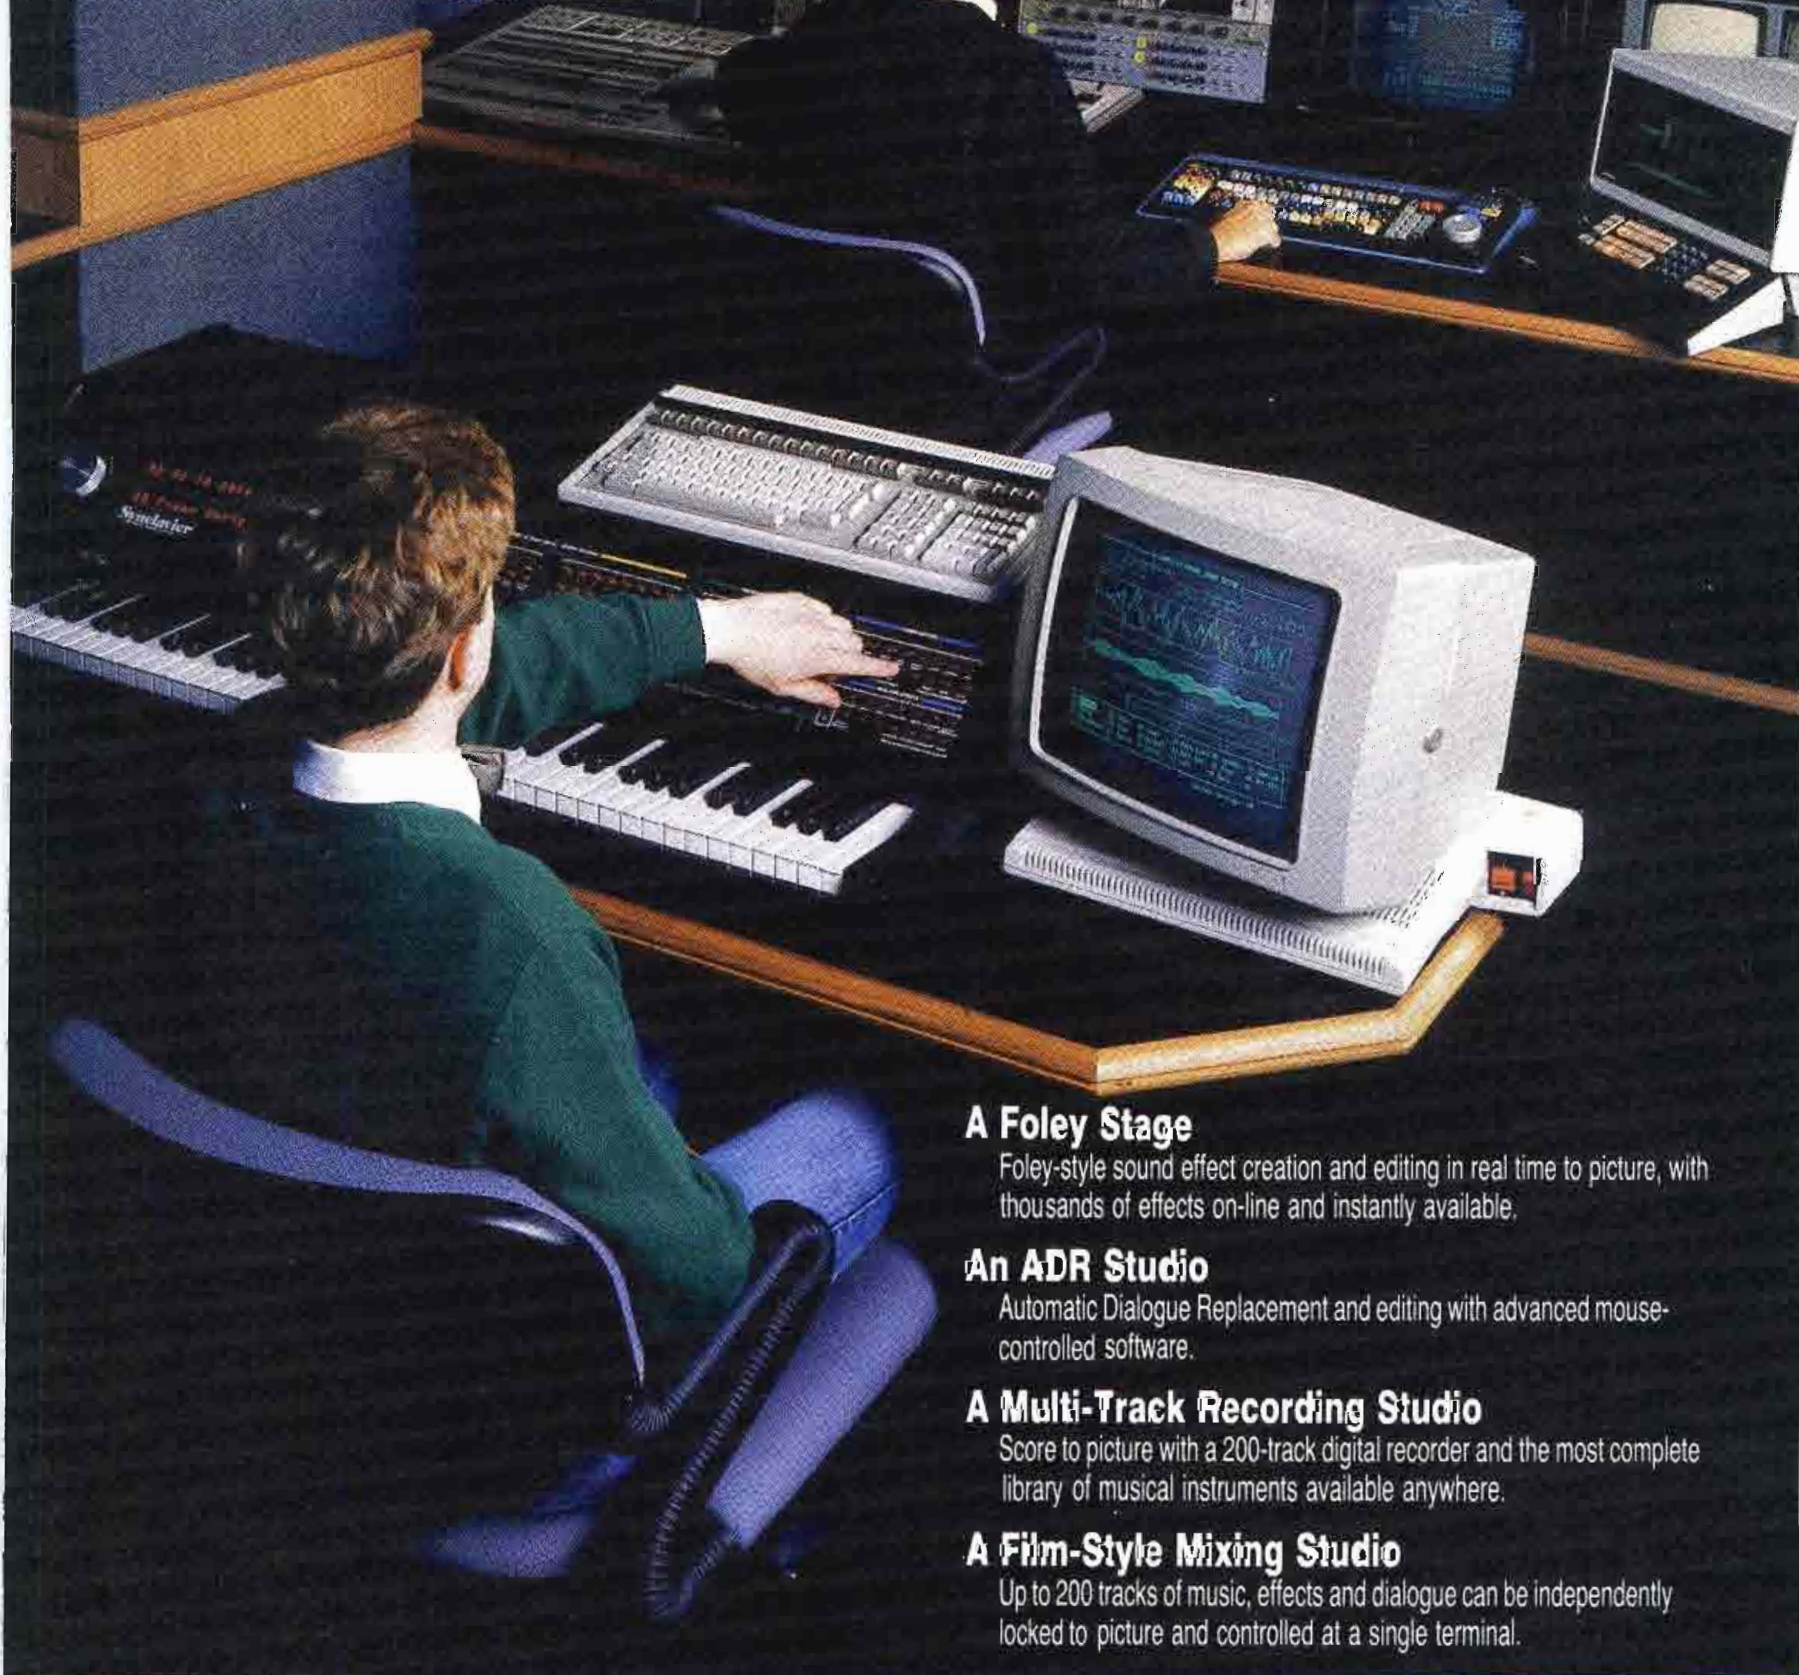

A Foley Stage

Foley-style sound effect creation and editing in real time to picture, with thousands of effects on-line and instantly available.

An ADR Studio

Automatic Dialogue Replacement and editing with advanced mouse-controlled software.

A Multi-Track Recording Studio

Score to picture with a 200-track digital recorder and the most complete library of musical instruments available anywhere.

A Film-Style Mixing Studio

Up to 200 tracks of music, effects and dialogue can be independently locked to picture and controlled at a single terminal.



The Tapeless Studio™

Featuring the Synclavier® Digital Audio System and Direct-to-Disk™ Multi-Track Recorder

The single workstation solution for today's demanding stereo post-production audio requirements.

Circle (60) on Reply Card


New England Digital White River Jct., VT, 802-295-5800 NY 212-977-4510 LA 213-651-4016

Authorized Distributors - Nashville 615-327-4343 London 202-4366 Tokyo 341-4660 Toronto 416-868-0528

www.americanradiohistory.com

Dear Tom,

Below is the distortion graph from last year with the audio chain adjusted for normal operation. Their were no switches in bypass or proof. The distortion measurements were made with the KLTH test equipment consisting of the AT-51 test set and the model 691 monitor.

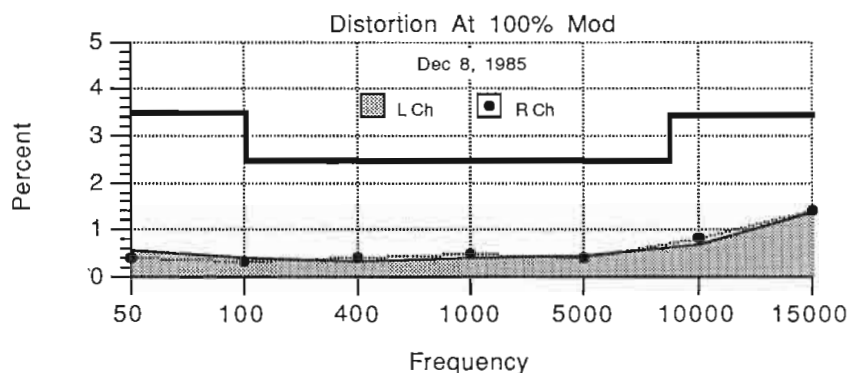

If you wish I could send you the results of the upcoming tests over the modem so you can review them before I leave on my vacation. I'll be out of town for five days. Randy and Marc will stand by for me.

You will also find the datasheets and serial number information on all the KLTH equipment enclosed.

Looking forward to your next visit.

Sincerely,

Joseph P. Geerling

Figure 6. Merging text and graphics can create professional-looking correspondence.

are especially useful when they highlight good performance.

Another example is the spreadsheet data in Figure 4. In this case, the proof-of-performance results were entered into the spreadsheet. The graph shown in Figure 5, based on the spreadsheet data, was developed within a few minutes. Once you've produced a graph such as this, you can drop it into a letter or memo, as shown in Figure 6. In another three to five minutes you also could send a copy to your boss.

Perhaps you would like to send this memo to potential clients or fellow engineers. Using a program's sort feature, you can be as selective as you wish. Assuming the information is contained in the database, the letter could be sent to all managers and CEs at FM radio stations in the states of Missouri, Illinois and Kansas that don't have computers and have been in business since 1980. The program's sort feature will select only those records meeting the desired criteria. The program can then merge the letter with the selected database records, and personalized letters will begin print-

Continued on page 86

SOLUTIONS

MODULA, MINI MODULA, AND SUPPORT EQUIPMENT from BSM Broadcast Systems

PROBLEMS:

1. Expandability
2. Programming
3. Cost

1. BSM Broadcast Systems solves your expansion planning problems for video and audio signal routing with **MINI MODULA**, in matrix sizes from 8 x 8 to 24 x 32, and **MODULA**, for matrices as large as 256 x 256. Both products use the same circuit cards to preserve your initial investment in an expandable system.


2. Both **MODULA** and **MINI MODULA** solve your custom programming needs because the systems are software driven. You re-program to the matrix without sending equipment back to the manufacturer.

3. You can see that BSM system costs are highly competitive—user programming, no hybrids, virtually maintenance free. **MODULA** and **MINI MODULA** expandability enhances your initial investment through growth phases of your development.

BSM also offers a complete line of distribution amplifiers and smaller video or audio switchers to complete your system.

Phone BSM today and discuss the **SOLUTIONS** for your signal handling requirements. Our engineers and managers want to work with you from the start.

SOLUTIONS:
(509) 838-0110
P.O. Box 19007
Spokane, WA 99219

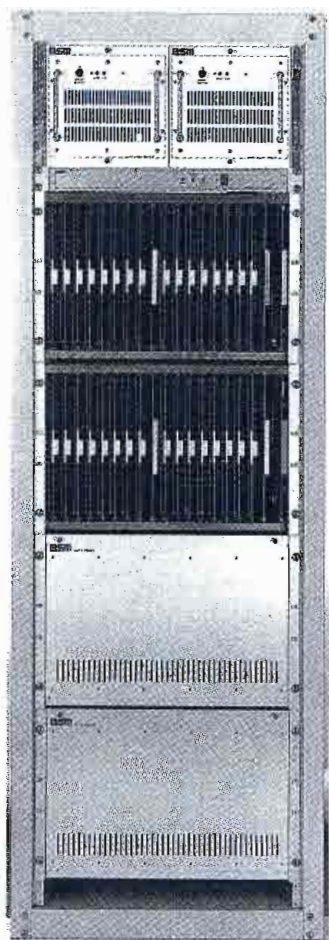

MODULA



MINI MODULA



BROADCAST SYSTEMS, INC.

Circle (85) on Reply Card

STICKY DECISION?

Purchasing A Routing Switcher
Is A Decision We Want You To Forget

Video
Products

PROPOSAL

3M

Page 1 of 5

Proposal
Prepared
for

STEVE,
THIS IS A DECISION YOU'LL
HAVE TO LIVE WITH FOR A
LONG TIME.
TAKE A CLOSER LOOK AT 3M!

SC.

The proposed 3M Broadcast Control System
will include the following major system components:

Series H Routing Switcher

You probably have several
important criteria for evaluating the
routing switcher system that's going to get
your approval; performance, reliability, control
flexibility, size, expandability. Each is important
now. Several will be important in the future.

The last thing you want to do is make a
decision that will come back to haunt you.

At 3M, we think once you make the decision to
use our products you should be able to forget it.
We design our products to work so well that you
can take them for granted. Systems so flexible,
they can grow in the ways you have planned,
and in the unexpected directions
that you can't plan for.

Frankly, we're probably not
the first manufacturer of routing
switchers to tell you these things. We have
some solid competitors with good reputations.
While at first glance their products may look
similar, a closer look will show you why we
have advantages they wish you would forget:

- The Series H Routing Switcher takes less
than half the space of the leading monolithic
and discrete crosspoint systems.
- Actual performance specs are better.
- The 3M control system is more versatile.

Now....are you going to make a decision
you have to live with, or one
you can forget?

Relax! We didn't meddle with a great format. But now that Ampex is delivering Beta-cam,[™] you get a lot of things that make this great format even better, and your job a lot easier.

Our field service people will solve your problems *fast* wherever you are in the world. Reach us in the U.S.

via our technical support hotline.

Our spare parts operation makes sure you get the right parts for your needs, and will advise you of any upgrades available.

Besides parts and fast service, Ampex offers pre-packaged repair kits. These simplify maintenance, insure peak performance,

and reduce down-time. You can get kits and parts from 14 regional warehouses designed as a worldwide network, close to you wherever you are.

And if you need help in the training department, classes are taught by experienced Ampex instructors at reasonable rates.

It also is comforting to

Ampex gives you



know that when one of those real tough problems that crop up now and then comes along, you can reach right into the heart of Ampex and talk to our product specialists and product managers.

So look into *our* line of CCD and tube-type camcorders, portable recorders/players, and studio editing

VTRs. Because now you've got the best of both worlds—a reliable format that makes quality pictures, and a supplier who has a reputation for customer service and product support second-to-none. And while you're looking, you'll want to check on our complete line of NEWS-oriented products, like graphics systems, editors, ADO opti-

cal effects, "C" format recorders, and a full line of production switchers.

Atlanta (404) 491-7112 Chicago (312) 593-6000
Dallas (214) 960-1162 Los Angeles (818) 365-8627
New Jersey (201) 825-9600
(In New York (212) 947-8633)
San Francisco (415) 367-2202
Washington, D.C. (301) 530-8800
Canada (416) 821-8840

AMPEX



more Betacam.



© Ampex Corporation 1986
Betacam is a registered trademark of Sony Corporation

Circle (63) on Reply Card

SITE 01-KLTH-FM			23-NOV-85 SUN 10:55:00		
[---STATUS---]			{-----RELAYS-----}		
FIL ON 1	☐		FIL OFF 1	☒	FIL ON TX1
OKT ON 1	☐		PLT OFF 1	☒	PLT ON TX1
FAULT 1	☒		SPARE	☒	SPARE
EXT OL 1	☒		PWR DOWN 1	☒	PWR UP TX1
AUTO ON	☒		LO PWR TX2	☒	H1 PWR TX2
AUTO HOLD	☒		PLT OFF 2	☒	PLT ON TX2
NORM AC	☐		SPARE	☒	SPARE
ANT > TX1	☒		PWR DOWN 2	☒	PWR UP TX2
IPA USWR	☒		FIL OFF 2	☒	FIL ON TX2
PA USWR	☒		AUD>BU EXC	☒	BU AUDIO
PA PLT OL	☒		EXC> BU TX	☒	BU EXCITER
PA SCAN OL	☒		SPARE	☒	AUTO CONT
AFC OL	☒		SPARE	☒	SPARE
STATUS 14	☒		SPARE	☒	AUTO ADV
EMER AC	☒		AUTO HOLD	☒	SPARE
ANT > TX2	☒		AUTO RST C	☒	AUTO RESET
MNT OVERRIDE. OFF			F/S OVERRIDE. ON		
PARTITIONS... 1			F/S RELAY.... ON		
DATA BASE... 1			TIME FNC..... ON		
FNC CTRL..... UPD STU			[-----CHANNELS-----]		
			+09.23 KV PLT VOLT 1		
			+03.58 A PL AMPS 1		
			+0101 W FWD PWR 1		
			+0.038 KW REFL PWR 1		
			-00.01 KV PLT VOLT 2		
			-0022. A PLT AMPS 2		
			-0021. W FWD PWR 2		
			-0.021 KW REFL PWR 2		
			-000.0 A TOWER LTS		
			+023.5 V STL VOLTS		
			+066.4 F IN TEMP		
			+0144. F EXHAUST 1		
			+0034. F OUT TEMP		
			+0119. V PHASE A		
			+0120. V PHASE B		
			+0118. V PHASE C		
			+25.77 KW TPO TX1		
			+102.4 KW ERP EST 1		
			+00.17 KW TPO TX2		
			+000.6 KW ERP EST 2		

Figure 7. Many remote-control systems allow access via modems. With the appropriate software, an engineer can monitor a transmitter from almost any location.

Continued from page 82
ing in a few seconds.

Perhaps the most interesting use of the computer involves the communications software and a modem. Some new remote-control systems have interfaces that can be coupled to an auto-answering modem. Through the use of a telecom-

munications program and a modem, telemetry and control data can be exchanged from almost any location. This technology makes it possible to use the microcomputer to access and adjust controls at a transmitter site from your home, office or even your convention hotel room.

At KLTH-FM in St. Louis, such a remote-control system is currently in use. Figure 7 is a printed view of the computer screen, using an off-the-shelf integrated software package. The computer, located in Oklahoma, called the transmitter site in St. Louis. The connection process took less than three minutes. The only expenses involved (excluding the required hardware) were the standard dial-up phone charges.

Computers are not the answer to every engineering function or problem. They can, however, provide valuable assistance to almost any technical department. One note of warning is in order. Learning to use any new tool takes time. Don't make the mistake of promising to automate the station or develop a database of thousands of names or even reduce costs in the first few weeks of operation. Computers and software are complex, sometimes feisty creatures. Give yourself time to become acclimated thoroughly and avoid making pie-in-the-sky commitments.

Today, broadcast engineers are called upon to be more creative, financially on top of things, organized and efficient. Hiring a computer as an assistant can make a lot of sense, not only for you but also for your company. **I :T-)))))**

With our Automatic Remote Control System your transmitter – and your personnel – will operate with increased efficiency

Have you ever wondered if your night operator will remember... to switch patterns at sunrise?... to periodically check critical levels?... the correct transmitter restart sequence? You'll never have to worry if Potomac Instruments' RC16+ is on the job. Because it'll do all these tasks for you. Plus a lot more. Automatically.


With its microprocessor based control logic, the basic RC16+ provides 16 telemetry channels with automatic out-of-tolerance alarms and remote raise/lower controls;

plus 16 status channels. The automatic functions — pattern shift, transmitter restart, power control — are pre-programmed in accordance with station license requirements and controlled with an accurate master clock.

The RC16+ is also expandable. In 16 channel increments, up to a total of 64 channels. With the remote video display option your chief engineer can get a detailed readout of all measured parameters. It's updated every 30 seconds and connects to any standard telephone. The optional plug-in automatic logger provides a permanent record of all transmitter activity. Log intervals, sequence, and alarm flags are user-selectable.

And, best of all, the RC16+ is cost effective. No other unit on the market offers these features and capabilities at this low price.

Basic System	\$4,995.00
Additional 16 Channels	1,865.00
Plug-In Automatic Logger	2,499.00
Remote Video Display Unit	650.00

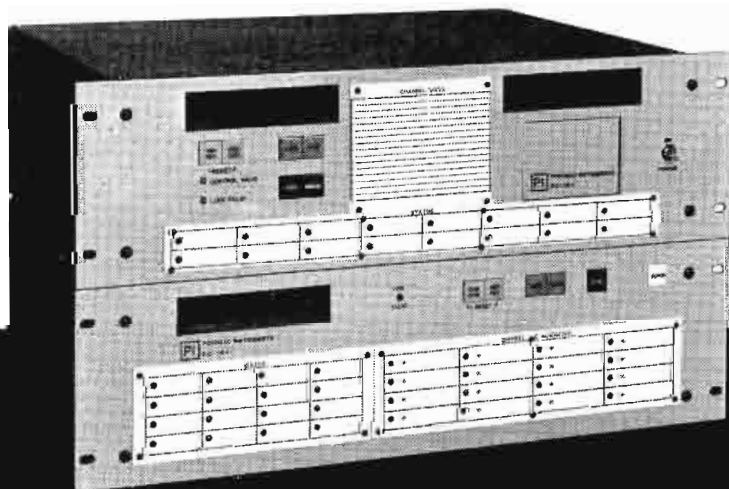

POTOMAC INSTRUMENTS
932 PHILADELPHIA AVE. SILVER SPRING, MD 20910
(301) 589-2662

Circle (64) on Reply Card

Q. What's the radio industry's best kept secret?

Harrison Systems, Inc., P.O. Box 22964, Nashville, TN, 37202, Phone (615) 834-1184, Telex 555133



Interested? Give us a call.

HARRISON is the only audio console manufacturer who makes its On-Air boards with the same program origination quality signal electronics used in recording and mixing today's music. If you are critical enough to be playing DIGITAL Compact Disks for your audience, then the HARRISON difference should be critically important to you. Beyond that, HARRISON puts critical care into every AIR-7 system. You already know HARRISON boards are built to last, and the HARRISON Support Hotline, 1-800-821-1560, gets you professional help when you need it—immediately.




The HARRISON AIR-7. Why? Because your competition and our competition won't tell you about it. And, we haven't done a good enough job telling you either.

A.

AIR-7

Circle (65) on Reply Card

www.americanradiohistory.com

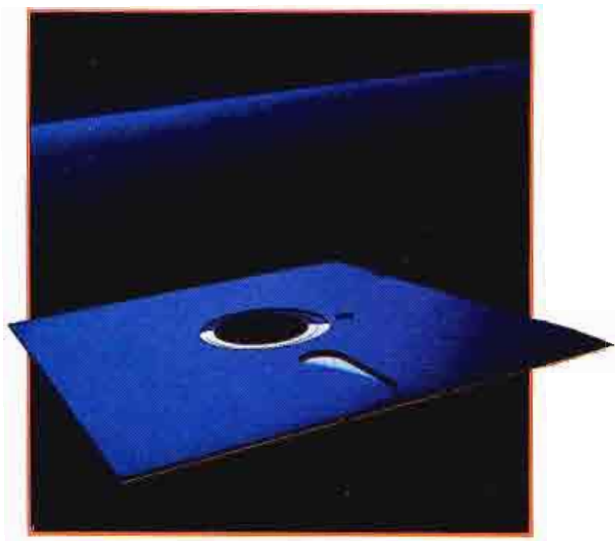

Computer power protection

By Mark Hill

Don't let your computer-driven broadcast equipment suffer damage from power-line disturbances.

Pure, raw power. We all need it and use it every day. But more than any other external factor, the quality of power provided by the local utility determines how well a piece of electronic equipment will operate. Disturbances in the power line, no matter how brief, can cause improper operation, permanent circuit damage, excessive heating, data loss and shortened component life.

Unconditioned power from the local utility may run 5% or more above or below the stated levels of 120Vac and 240Vac. In addition to voltage variations, a given power line may suffer from a number of other disturbances. The seven deadly sins of ac power are electrical noise, spikes, voltage surges, voltage sags, glitches, outages and frequency deviations. To combat these problems, you must understand the cause of each type of disturbance and its effect on electronic equipment (see Table 1, page 97).

Disturbances

Electrical noise generally manifests it-

self as hash or a series of spikes on the power line. Noise is usually much lower in amplitude than the single spike.

Electrical noise generally can be broken down into two types: *RFI* (radio frequency interference) and *EMP* (electromagnetic pulse). Any device that generates an arc or spark can radiate RFI. *ENER64*. This interface often originates in motors and motor-control devices, switches, relays, static and atmospheric discharges and even automotive ignition systems. Broadcast transmitters also are possible culprits. Electrical noise is not as destructive as a sudden high-voltage spike, but it can cause poor performance, accelerated component deterioration and altered data in computer circuits.

Voltage spikes, or transients, are sudden, short-term increases in line voltage, typically lasting 100ns or less. They may reach an amplitude of thousands of volts, with frequencies in the kilohertz or megahertz range.

Spikes or transients may be generated from many sources, but usually result from some type of inductive "kick." Switching heavy loads onto or off of the power line can cause large transients.

Even an electric typewriter, for example, when switched on and off can induce a 1,000Vac spike onto the power line. Power utilities often generate spikes when switching from one feeder line to another. Severe spikes can cause permanent component damage, erratic operation and lost or altered data in computers and security systems.

Voltage surges are increases in line voltage above the normal level for more than one-half cycle. Surges may last several cycles, seconds or minutes. They can be caused by removing a heavy load from a power line or switching feeder lines at the power utility station. Although a surge typically will not reach the magnitude of the single spike, surges can cause erratic operation, overheating, reduced component life and damage to input circuitry.

Sags usually are caused by switching heavy loads, either at the power utility station or within your own facility. Lightning also may cause short-term sags. The low voltage often causes power supplies within equipment to fall out of regulation, which in turn causes noise, improper operation or complete shut-

Hill is a technical service representative for International Tapetronics/3M, Bloomington, IL.

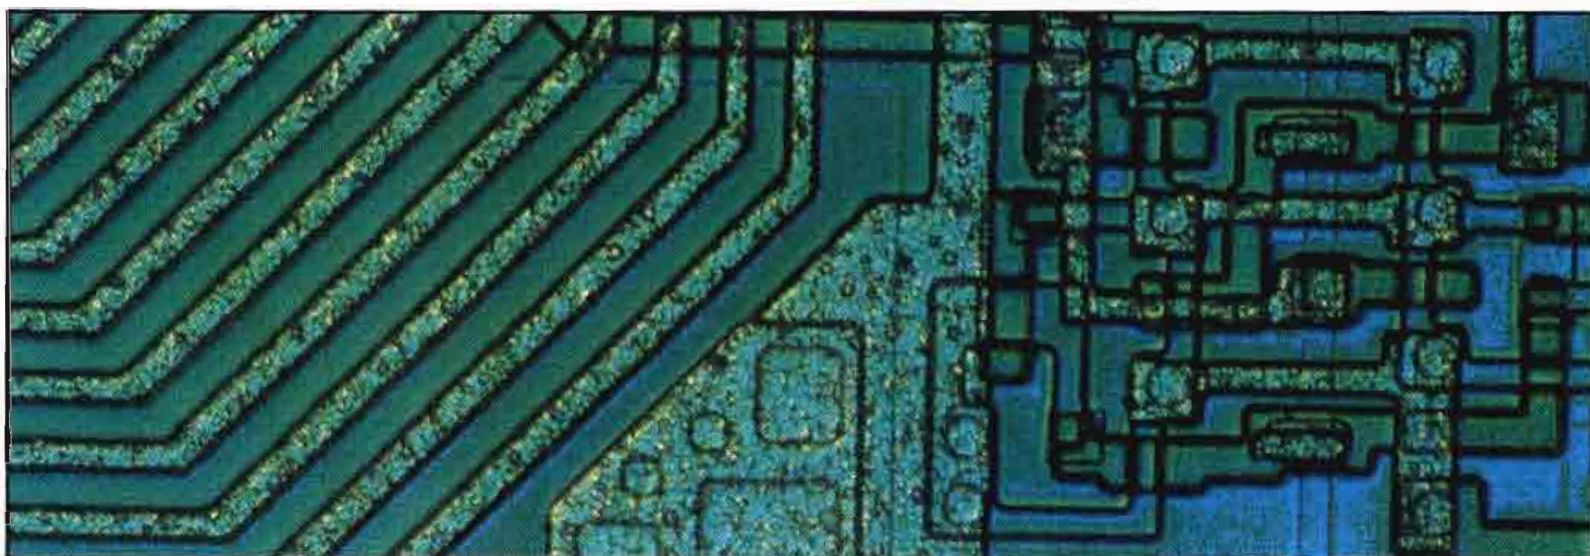


Photo by Timothy Scheffer


The increased dependence on integrated circuits in broadcast hardware demands careful attention to suppression of transient disturbances on the ac power lines into a facility. Transient overvoltages represent the greatest single threat to proper operation of ICs and other sensitive components.

You said,

**'I NEED A VIDEO
TRANSMISSION SYSTEM
THAT MEETS RS-250B
SHORT HAUL SPECS, WITH
BETTER LINEARITY,
SUPERIOR PICTURE
AND LARGER LINK
BUDGET...'**

and we said,

'YOU'RE ON.'

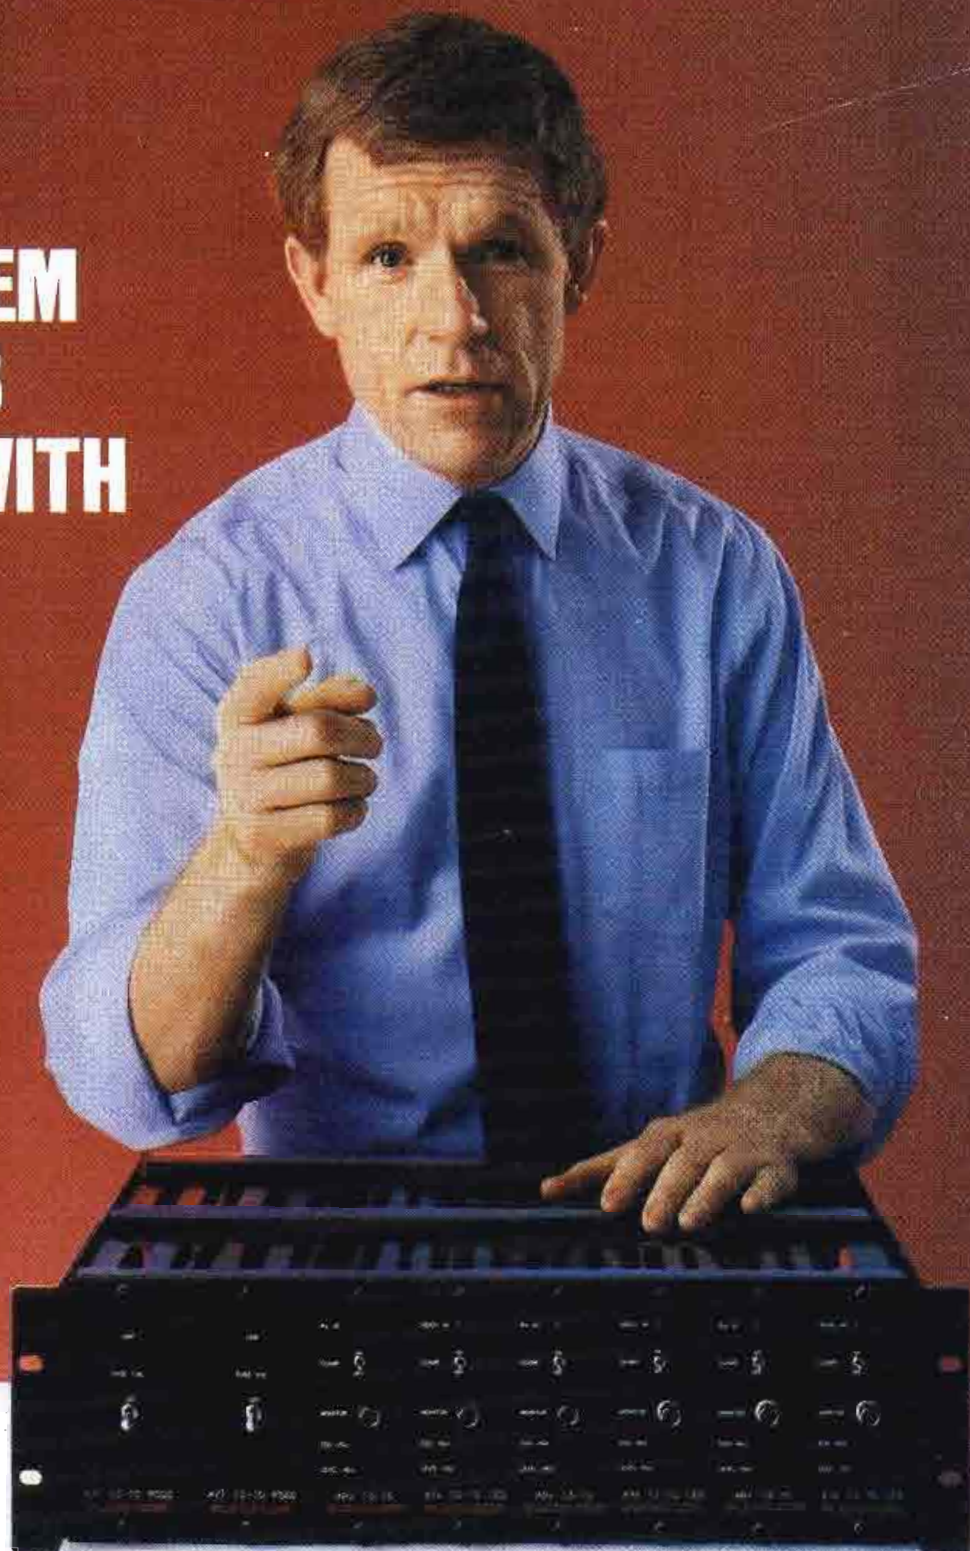

There are some things that just don't belong on live TV. Static in the picture from EMI or RFI contamination. Fuzzy electronic glitches. Or maybe you're having trouble tele-reporting the signal to other locations and you can't tell why.

If you want to eliminate problems like these, we have a suggestion. Get rid of that outdated coaxial or microwave equipment. And then get PlessCor's fiber optic analog video transmission system.

Its got everything you need for on-location broadcasts, with performance and features

that come across loud and clear. Features like a user friendly front panel that give you total control over cable equalization and system gain adjustments. Front panel clamps for easy formatted or unformatted selection. Add to that 75 ohm and 124 ohm simultaneous outputs and it's easy to see why this is the video transmission system that really puts out.

Additional performance is available when you specify our optional upgrade cards including 4 simultaneous outputs, 2 high fidelity audio channels, and redundant AC or DC

power supply, just to name a few. Available with both multimode and single mode light emitting diode and/or laser sources, repeaterless link distances up to 60 kilometers may be supported in current cable plants.

PlessCor's AVT-13-10. Because in a business where your image is everything to us, we make the choice crystal clear. And you'll see the difference as soon as you hear the words, "You're On!"

For more information on this and our other analog video system products contact us at 818/700-0841.

MADE IN THE USA.



PCO, Inc. Formerly PlessCor Optonics Inc., 20200 Sunburst Street, Chatsworth, CA 91311-6289
Tel: (818) 700-1233 Tlx: 650 239 8651 Fax: (818) 700-9047

Circle (74) on Reply Card

www.americanradiohistory.com

down. Excessive heat probably is the most severe result of low-line voltage, in addition to lost or altered data.

Voltage sags, or *brownouts*, are defined as drops in voltage below the normal level for one-half cycle or more. In extreme cases, sag can last for several hours and cause permanent damage to electronic equipment.

The infamous *glitch* is actually a power outage or near-outage lasting less than one cycle. Glitches often occur when the power utility switches feeder lines. The glitch also may be accompanied by a

voltage spike generated at the completion of the switchover. Glitches often result in data loss, injected errors in computer and security systems and possible head crashes on disk drives.

Although uncommon, a power outage, or *blackout*, can be the ultimate disturbance, resulting in an unplanned equipment shutdown. Many stations have emergency generators, but they take time to kick on, causing other problems.

Frequency drifts are uncommon on U.S. power lines, but are inherent to motor-driven generators. Line-frequency

variations can cause improper operation, speed variations in motors, data alteration or disk drive shutdown.

You may be familiar with the effects of these disturbances in severe cases, but you may not be aware of the damage that can be done to equipment when it is exposed repeatedly to seemingly minor disturbances. Capacitors subjected to spikes can break down and short. Resistors can heat up from power sags and electrical noise, changing value over time. Semiconductors and ICs, although appearing to function normally, can deteriorate in performance and eventually fail completely. Clocked-logic systems sometimes become confused by glitches, spikes and electrical noise. In general, dirty power lines are detrimental to the operation of all electrical equipment.

Monitor the lines

What can you do? Before running out to buy power-line protection, first determine your requirements. What types of disturbances are occurring at your facility? How frequently do they occur? Is your area prone to frequent outages, electrical storms or ice storms? A chart of the relative frequency of common power-line problems is shown in Figure 1.

You might contact your local utility company to inquire whether it will rent or loan you a chart recorder, which can be connected to the power line for a few days. A local computer service company also might have a power monitor for rent. This type of monitor provides a graphic indication of the types of disturbances present on that line.

Also consider what areas to protect, and the resultant cost of a power outage in those areas. A disturbance in the on-air studio may be catastrophic, while a shutdown of the traffic or sales department computer may just be inconvenient. Once you have identified the areas requiring protection, calculate the load requirements of each area. Consider more than just the present requirements. Try to project what the station's needs will be one or two years from now.


Identify the noise source

Now that you have identified the types of disturbances and the areas needing protection, examine the situation carefully. There are several things to look for to help reduce the disturbances:

- **Grounding:** Proper grounding is essential. Many power-line disturbances can be reduced or eliminated by proper grounding. It is important to note that what may be an adequate ground for protection against electrical shock may not eliminate electrical disturbances. Voltage spikes and RFI can be capacitively coupled into equipment and improperly shielded audio or control lines.

Care should be taken to ensure proper

Blackout Problems Disappear.

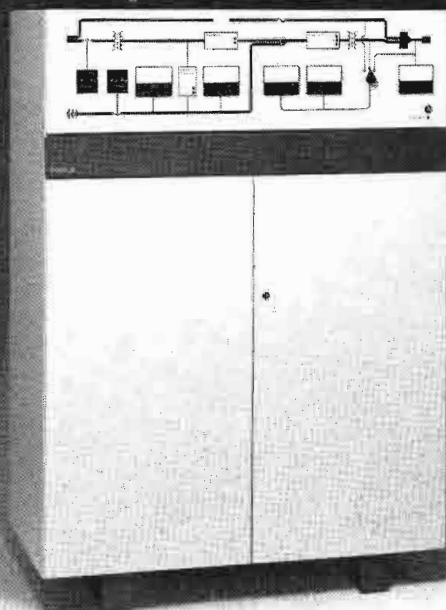

We Guarantee It.

Our Uninterruptible Power Systems make power outage problems disappear. Featuring on-line operation, Series 81000 and 82000 UPS provide stable, noise-free AC power regardless of the condition of the commercial power line. They regulate line voltage to within 5% of nominal and provide up to 5 hours of reliable backup power. Models are available in power ratings from 500 VA to 15 kVA.



Our **Product Performance Guarantee** states that if a Topaz Uninterruptible Power System doesn't eliminate blackout problems to your satisfaction, we'll refund the purchase price in full!

For more information about the most effective UPS available, call (619) 279-0831 or call your local Square D distributor. And give your sensitive equipment *guaranteed* protection.

TOPAZ®
A Subsidiary of Square D Company

Circle (61) on Reply Card

SURGE PROTECTORS



Widest Range of Protectors Available Anywhere!

Data Line Protection

MCG provides a sophisticated blend of high speed (less than 5ns) and brute force protection for the sensitive equipment on your data lines. Guards computers and terminals, video cameras and cable, video wideband equipment, modems, and more, against induced transient voltage surges. Available in multiple configurations, they are designed to be used with coaxial cable, single or twisted pairs, RS-232, -422 and -423, 20 ma loops, etc.

MCG is your one complete source for cost-effective protection against voltage surges and transients.
SEND COUPON FOR FREE CATALOG.



MCG

ELECTRONICS INC.

*Specialists in Circuit Protectors,
 Transients, Lightning & Surges.*

12 Burt Drive, Deer Park, NY 11729
 Nationwide (800) 851-1508
 In N.Y.: 516-586-5125 Telex: 645518

AC Power Line Protection

MCG Surge-Master™ protectors are heavy-duty, bi-polar clamping devices that limit AC overvoltage spikes to safe levels. Available as service panel protectors, plug-in devices and power strips, they guard everything from individual pieces of equipment to complete buildings. A variety of models handle the full range of AC voltage and current levels.

MCG Electronics Inc.

12 Burt Drive, Deer Park, NY 11729

- ☐ I have an immediate need, please contact me.
☐ Yes, send me your free full-line catalog on:
☐ AC Power Line Protection ☐ Data Line Protection

Name _____ Title _____

Company _____

Address _____

City/State/Zip _____

Telephone _____

Circle (68) on Reply Card

STANTRON

CENTER

for • VIDEO PRODUCTION
• POST-PRODUCTION
• EDITING • ENG • EFP

- CABINET CONSOLES
- DESK CONSOLES
- VTR/VCR RACKS
- DUBBING RACKS

STANTRON VIDEO CENTER

Designed for
YOUR VIDEO EQUIPMENT
has modular "add-on"
features that allow
maximum flexibility
and versatility
in designing console
arrangements for
professional, industrial,
communication
and educational
VIDEO CENTERS.

Write or call for **FREE**
VIDEO CENTER CATALOG
200

mailing address: P.O. Box 9158VC
No. Hollywood, CA 91609 U.S.A.
or call Toll Free: 1-800-821-0019
No. Calif. Toll Free: 1-800-821-0020
So. Calif. please call 1-213-975-0800
TWX: 910-498-2177

STANTRON

Unit of Zero Corporation

factory:
6900-6918 Beck Ave.
No. Hollywood, CA 91605

Circle (110) for IMMEDIATE REQUIREMENT.
Circle (111) for LITERATURE ONLY.

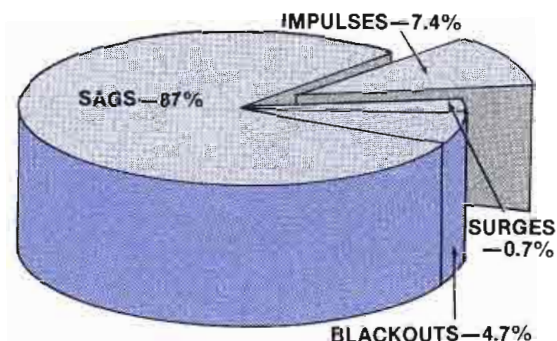


Figure 1. The pie chart depicts the average percentages of outages by category, measured in multiple locations over a 2-year period.

grounding of equipment and all connecting audio and control lines. Contact the company's factory technical service representative for assistance on proper equipment grounding.

- **Line load:** Is the area requiring protection on a dedicated line? If not, what other equipment is on that line? Moving heavy inductive loads to different circuits may be necessary. Dedicated lines can be installed to protect an area, but this may provide protection only from *internally* generated disturbances.

- **Isolation:** Some pieces of equipment are, by nature, electrically noisy. Some use power in surges. Isolating this equipment with transformers may result in a significant improvement. Another alternative might be to isolate the offending equipment to one phase of the 3-phase supply, while running sensitive equipment from the opposing phases.

- **Peak demand:** If power disturbances seem to occur at the same time every day, try to identify the source of the disturbance. Usually a little detective work will lead you to the cause.

Install protection equipment

Once you identify the source, you can be relatively confident about the steps to take toward solving the problem. A wide range of power protection systems and devices is available. Most of them fall into one of five categories:


- **Surge suppressors**, or spike clippers, shunt voltage spikes that exceed the clamping voltage of the device (see Figure 2). Typically this is set at 200Vac on a 120Vac line. Surge suppressors offer no protection from spikes less than 200Vac or from voltage reductions or electrical noise.

- **Isolation transformers** electrically isolate equipment from the power line. They protect against electrical noise and short-term voltage spikes. However, isolation transformers offer little or no protection against longer duration spikes, glitches or low-voltage conditions.

- **Voltage regulators** generally provide no isolation, but merely regulate the supply voltage. Regulation usually is accom-



Larry W. White
Chief Engineer
KOAM-TV, Pittsburgh, KS

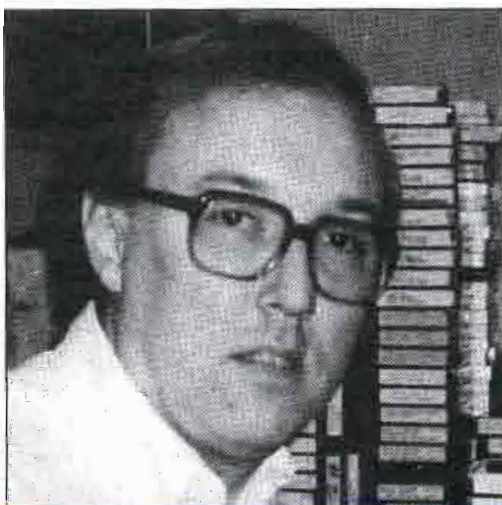

James L. Sorensen
Chief Engineer
WJQY-FM, Fort Lauderdale, FL



Daniel S. Bruck
Telecommunications Specialist
Channel 25, Beverly Hills, CA

How 3 Broadcasters Solved Their Power Problems

LARRY W. WHITE **3 KVA FERRUPS Uninterruptible Power Supply**

EQUIPMENT SUPPORTED: IBM System 36 with two workstations, two IBM-PC XTs, 3 printers.

WHITE'S STORY: "Pittsburg, KS, has 'soft' power. We are at the end of a long leg from a rural electric company. If a farmer down the road turns on an arc welder, we see a drop in power. Just turning on a gang of lights in the studio drags the line below 108 volts. We lose power completely to thunderstorms in the summer and snowstorms in the winter.

"All these problems—outages, soft power, brownouts—played havoc with our computer, which runs day and night doing traffic, payables, receivables, administration.

"Since installation of the FERRUPS in May, 1986 to support the computer, we have not had a single glitch. I'm real happy with the FERRUPS."

JAMES L. SORENSEN **7.5 KVA FERRUPS**

EQUIPMENT SUPPORTED: IBM System 36 with 3 terminals and 3 printers; microwave transmitter, 2 IBM-PCs with printers, telephone system, satellite down-link equipment.

SOERSEN'S STORY: "We were plagued by large voltage swings, outages and surges, which our utility considers 'acceptable' power. All crashed our computer and shut down the microwave transmitter. We installed a 350 KVA diesel generator. There was a 12-second gap between power failure and generator coming on line. Twelve seconds is a disaster in radio.

"In the first 2 months after installation of the Best FERRUPS, we experienced 43 power problems that would have crashed our systems. Protected by the FERRUPS, everything just hummed on. FERRUPS closed the generator gap."

DANIEL S. BRUCK **1 KVA MICRO-FERRUPS**

EQUIPMENT SUPPORTED: Electronic billboard (specialized character generator), sync generator, frame store synchronizer.

BRUCK'S STORY: "The smallest power glitch would cause the unattended 24-hour-a-day character generator to go down, leaving us with a blank screen. When the character generator crashed, memory was lost. It took 3 hours to restore messages. These glitches also affected synchronization between other devices necessary for stable signals. These power problems occurred twice a month.

"Since installation of Best's unit in early 1986, we have not had a single power problem with any equipment. And the character generator works better because of the line conditioning provided by the MICRO-FERRUPS, in addition to uninterruptible power."

Among the many features of Best's Uninterruptible Power Systems are:

- Continuous computer grade power
- Traps spikes, surges, sags
- On-line in phase
- Microprocessor control
- Computer interactive
- User programmable
- RS232 port standard
- Extensive diagnostics
- Low component count
- Lowest noise level
- Least heat throwoff
- 250 VA to 15 KVA range
- Lowest price/most efficient
- UL approved

For your free catalog on all of Best's Uninterruptible Power Supplies, call or write today.



UL approved FERRUPS, in 250 VA to 15 KVA capacities, are as much as 33% smaller than any other unit on the market.



Best Power Technology, Inc.

P.O. Box 280 Necedah, WI 54646
(608) 565-7200

Toll Free (800) 356-5794 - Ext. 028

IBM System 36 and IBM-PC are registered trademarks of International Business Machines Corporation.

Circle (70) on Reply Card

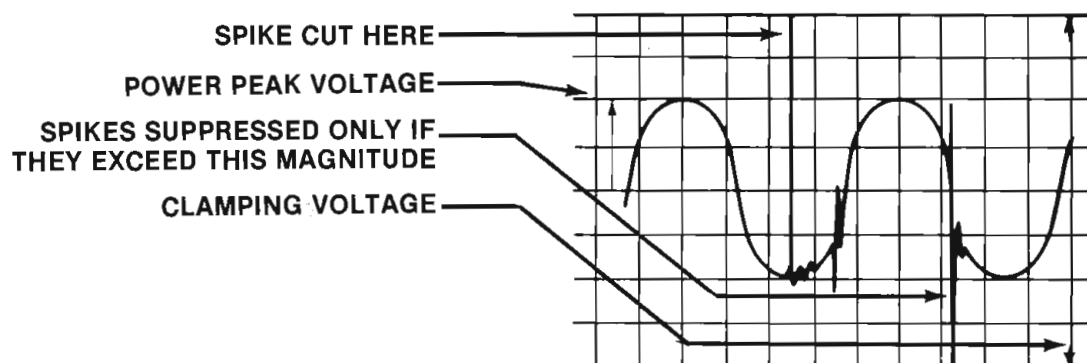


Figure 2. Spike clippers suppress only voltage spikes that exceed the clamping voltage, which is customarily set at approximately 200Vac for a nominal 120Vac power line.

plished by electronically switching taps on the transformer's primary winding. Equipment is left exposed to spikes and sags that occur too quickly for the regulator to react.

- **Isolators/regulators** combine the protection of an isolation transformer with a voltage regulator. This combination provides effective protection against most disturbances. There are two types of devices commonly available: tap-switching and ferroresonant. Tap-switching devices, like the voltage regulators, fall short in protecting against longer duration spikes and require one to three cycles to correct voltage fluctuations. Neither type can protect against power outages.

- **Uninterruptible power supply (UPS)** systems offer the utmost in power-line protection.

Main story continues on page 97


K104 TAMED VOLTAGE TRANSIENTS WITH POWER SIFTOR®

"You may not know it, but right now your new whiz bang piece of equipment could be destroyed, not by an overzealous, hyperactive disc jockey, but by an even more insidious menace: voltage transients, or spikes, on the electrical lines in your studios or transmitters.

"At K104, we can't afford to go off the air because of power surges and lightning strikes. Our Current Technology Power Siftors have saved us from these perils on a number of occasions. That's why I recommend them for studio and transmitter site protection.

"If you CAN'T AFFORD to be off the air...you CAN AFFORD Current Technology Power Siftors."

-Gerry Dalton
Director of Engineering
KKDA FM/AM Dallas



**CURRENT
Technology**

1400 South Sherman Drive, Suite 202
Richardson, TX 75081 Phone 214/238-5300

Power Siftor is a registered trademark of Current Technology Incorporated

Circle (107) on Reply Card

UPS vs. standby

Selecting the type of power protection to use requires careful consideration. Many broadcast applications rely on computer-based equipment, which is less forgiving of power-line disturbances than some other devices. In many cases, the importance broadcasters now place on computers may demand that the computers never suffer a brownout or power outage.

If this applies to your station, a UPS or standby power system may be required. Both devices rely on an inverter to convert dc voltage from a battery into 120Vac for power during an outage. There are, however, distinct cost and performance differences between a UPS and a standby system.

A standby system consists of an inverter, battery, battery charger and high-speed transfer switch. When not activated, the inverter is at rest and the primary ac power passes straight through to the load. When the ac voltage drops below a preset threshold, the load will be transferred and the inverter switched on to supply ac power. When the ac returns, the load is switched back to the ac line, the inverter is switched off and the battery is recharged.

The standby system is sometimes called an off-line UPS because during a power outage there is a lapse during the switching process from ac to dc power. The switching time for a standby power system is typically from 2ms to 10ms. Standby systems protect only against blackouts; they do not protect against line voltage problems such as surges and sags.


UPS

The UPS system is similar to the standby power system, but doesn't have a transfer switch. The load is continuously supplied power developed within the UPS. The line ac is con-


Knowledge is Power.

The more you know about RAMSA power amps, the better they look. Designed for stability and reliability,* they reflect our knowledge of the most demanding applications.

And their graceful overload

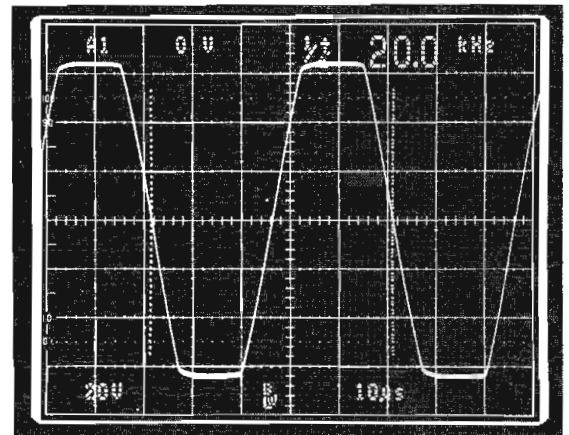

The WP-9220 exhibits gentle overload characteristics even when overdriven 3dB into 4Ω Load at 20 kHz (643 Watts).

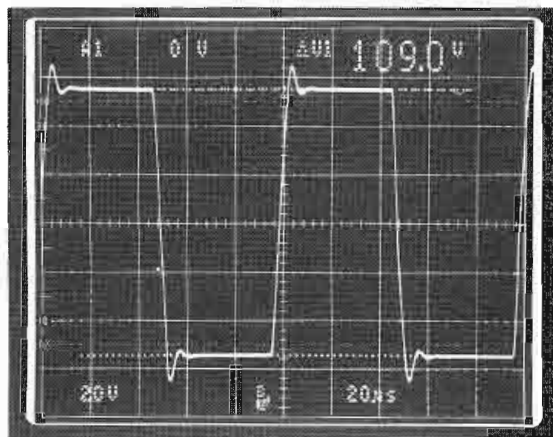

The WP-9220 exhibits minimum ringing even with extremely reactive loads. (8Ω, 1μF; 10 kHz square wave input.)

characteristics dramatically improve apparent headroom. To learn more, see your RAMSA dealer, or write to 6550 Katella Avenue, Cypress, CA 90630.

*Ramsa amplifiers carry a 5-year limited warranty.

Circle (73) on Reply Card

RAMSA

Panasonic
Industrial Company



RAMSA



2 Channel Power Amplifier WP-9220


verted to dc to charge the battery and power the inverter section. The inverter converts the dc back to ac, which powers the load.

A drop in the ac line causes the battery charger's dc output to decrease, but the battery automatically compensates and continues to supply dc power to the inverter. The inverter's ac output to the protected load continues with no interruption.


In addition to providing blackout and brownout protection, the UPS also serves as a power conditioner. Low voltages, spikes, surges, noise and most other power-line problems can be eliminated by a UPS. A UPS has the advantage of no switching time; the unit is always on-line. This feature is important for many computers that cannot tolerate the momentary outage produced by a standby system.

Other factors


* The standby system often is less expensive than the UPS. The standby system can be useful for equipment that can withstand the switching time during an outage without suffering malfunction or component failure. More sensitive and sophisticated equipment may require the continuous operation provided by a UPS. In both systems, the length of time you can operate off-line depends upon battery capacity and load current requirements.

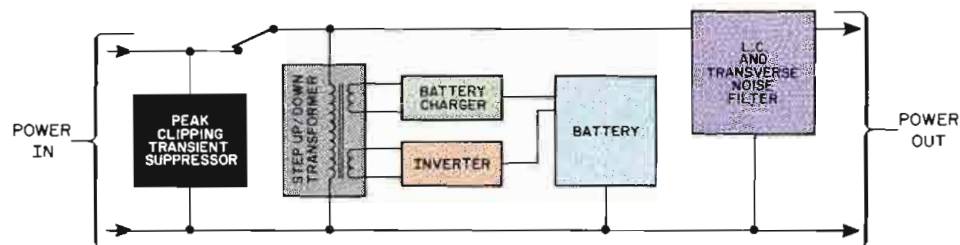

The typical standby power system protects only against blackouts. Also, the transition time between modes can create problems for computer-based equipment.

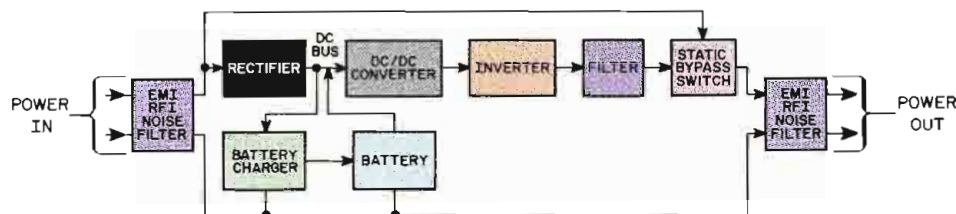

The UPS system provides constant operation. There is no transition time outage between line and backup operation.

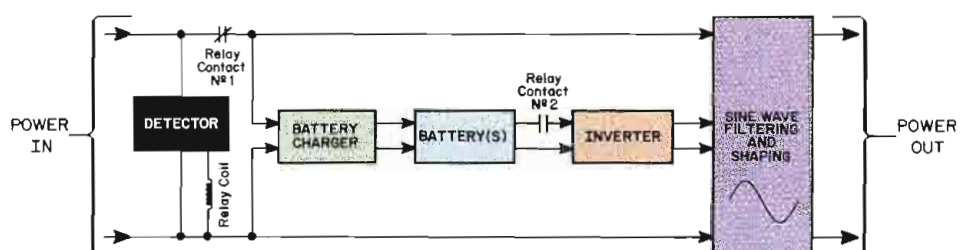

In addition to providing standby power protection, some power supplies also provide line-voltage regulation and noise filtering, while operating in the normal on-line mode.

AT LAST! STEREO FIELD MIXING COMES OF AGE!



Until you try the new AT4462, you'll never fully realize what other mixers put you through, just to get a stereo signal on tape, on film, or on the air. Because simply adding pan pots or another output to a mono mixer is not enough for today's stereo.

Field Tested and Refined

We went to network and independent broadcast engineers, and leading film and A/V audio people to learn your problems and needs first-hand. And we returned again and again to test our solutions. These tough critics agree that the new AT4462 sets up far faster, provides better signal control, and results in better audio...even in the hands of inexperienced personnel.

NEW AT4462 STEREO FIELD MIXER WITH EXCLUSIVE MODU-COMM™

Introducing Modu-Comm™

The AT4462 is designed for the real world. For instance, let's assume you're doing a simple sports remote. You set up microphones for the sportscaster and the color announcer, plus a stereo mike for the ambient crowd noise. Normally you would also have to run a

For literature and
name of A-T Sound Specialist
CALL 1-800-992-ATUS (2887)





Electrical Noise 	Atmospheric conditions Radar, Radio signals, Arcing equipment Switching apparatus	Individual data bits changed, data altered
Spikes 	Lightning Power line feeder switching Power factor capacitor Switching Turn-off of heavy motors	Data altered, wiped out Circuits damaged
Surges 	Sudden load decreases Switching of feeder lines	Data altered Equipment shuts down
Sags 	Lightning Turn-on of heavy loads	Data altered Equipment heats up excessively, leading to early failure Computer shuts down
Glitches 	Power line feeder switching Circuit breaker re-closing Brief short-circuits	Disk heads crash Data altered Equipment shuts down
Outages 	Accidents involving power lines Transformer failures Generator failures	Disk heads crash Data altered Equipment shuts down
Frequency Deviations 	Generator instabilities Huge load changes	Data altered Disks shut down

Table 1. These seven disturbances account for most of the power-line-induced damage to equipment.

Continued from page 94

protection, guarding against all forms of interference, including power outages. However, depending on type and battery capacity, a UPS system can cost several times more than an isolator/regulator of comparable capacity. UPS systems are invaluable where a clean, steady and uninterrupted power supply is critical.

Countless hours are spent by engineers nationwide, tweaking and tuning equipment to achieve the utmost in performance. All too often, the power being supplied to that equipment is taken for granted. Power protection requirements vary greatly, and require a careful analysis of each facility.

The cost of protecting your station could vary greatly, depending on the facility's size, the magnitude of the power problems and the level of protection required. In nearly every case though, the cost of power-line protection is small compared with the cost of repairs and dead air these problems can cause. Carry your good engineering practices right down to the power line, and you are almost guaranteed success. |:-)))||

wired or wireless feed to the sportscaster for his cue phone.

But with the AT4462 and Modu-Comm, cue is fed through the announcer's mike cable already in place. Add a small accessory decoder to the end and plug both the cue phone and the microphone into the same cable. Cue can be program, an outside line, or "talk over" from the mixer. No extra wires, no crosstalk, and no change in audio quality! Nothing could be simpler or more efficient.

Now, No-Fuss Stereo

Actual stereo mixing is equally straightforward. The sportscaster and the color announcer in our example appear on separate pannable inputs so they can be centered as desired in the sound field. The stereo crowd pickup goes to a stereo input, with clutch-ganged controls for one-hand level control. And there's a second stereo input for another mike or line level source

(a second field mike perhaps, or for pre-show interviews on tape).

True Stereo Limiting Plus LEV-ALERT™

Adjustable limiters can operate in tandem, or individually as you prefer. And our Lev-Alert system can give you peak level audible tone warnings in your headphones when you can't watch the VU meters. Trust Lev-Alert to keep your standards high...even when it isn't easy!

Take A Close Look

When you examine the new AT4462



audio-technica®

1221 Commerce Drive, Stow, OH 44224 • (216) 686-2600

you'll see a host of other features to help you do your job: Cue on every channel...Separate headphone amplifier...Phantom power for all types of mikes...Three-frequency tone oscillators...Slate mike...Supplied carrying strap and protective case...Powered either by internal 9-volt batteries or any external 12-18 VDC supply, any polarity.

A New Era in Stereo Begins

We've made the new AT4462 a working tool that helps you and your staff take full advantage of the production values stereo has to offer. And a hands-on test will quickly prove it. To learn how the AT4462 can help you create better audio every day, call or write us now.

True 600Ω Stereo/Mono Outputs
Mic/Line Level Out
Mic/Line Switch on All Inputs
20 dB Pad on All Inputs

MODU-COMM™ Line Level Adjust
Limiter Level Adjust

External 12-18VDC Either Polarity

Cue on Each Input
Two Mono Inputs with Pan Controls
Slate Mic with Frequency-Selectable Tone



Phantom 12V Power for All Inputs

All Inputs and Outputs Transformer-Coupled

Flat/Lo Cut Filter on All Inputs

9V Internal Batteries (3)

Strap Bracket Protects Face

Headphone Outputs (2)

MODU-COMM™ External Mic/Line Inputs

Bus In/Out

Two Stereo Inputs with Dual-Clutch Controls

LEV-ALERT™ for Audible or Visual Peak Level or Limiting Warning

Stereo Limiter Switchable to Dual Mono

MODU-COMM™ Full Duplex Communication over Existing Mic Lines

Circle (66) on Reply Card

Media Touch 2005 control system

By Larry Vidoli and Jim Oliver

When WEEI-AM wanted to automate its overnight broadcast operation, it was decided that the same system might be used to ease the daytime anchor's job. Using the system that evolved, it is now possible for a dual anchor morning drive team in an all-news format to run combo.

The Media Touch 2005 was selected to perform the complex switching and live-assist tasks. The system provides a control network that allows fingertip control via a touch-sensitive color CRT screen. Simply by touching the CRT screen, an announcer can control all aspects of the broadcast operation. Through the system, the anchor can control live-remote audio feeds, cart machines, Instacarts, reel recorders, on-air telephone lines and the delay system. We can eventually control digital audio sources such as a CD multiplayer or audio sources such as computer hard disks.

The automation system also communicates directly with the station's traffic and billing computer and the newsroom NewStar computer. The integration of on-air operations with the business side of the station has proved extremely useful.

A local area network is the heart of the system of IBM XT computers. An IBM AT computer acts as the file server for the entire system. Each work station consists of an XT computer, which can access and change any of the information stored on the file server. The LAN essentially allows all of our computers to communicate with each other. The traffic computer sends the daily log information to the network. The work station with the touch screen, OPLOG, reads the log information and controls the various equipment associated with our on-air operation.

The editor's work station allows direct communication with the OPLOG work station and last-minute changes to the program log. The server computer has 20Mbytes of disk storage. The large amount of storage allows us to also have word processing and database programs



Performance at a glance

- Provides automated or live-assist features to a radio or TV station
- The touch screen provides the announcer with easy control of audio sources
- Audio sources controlled via an RS-232 databus
- Capable of linking with billing and traffic computers, providing integrated accounting and control
- Standard audio input/output configuration: 32 x 6
- THD + noise 0.008% at +8dBm
- Hum and noise -88dBm at +8dBm



The modified color TV monitor provides control and feedback information to the operator. All control takes place by pressing the CRT screen.



Program log and tag-copy appear in windows, which overlay the current information. The windows for a variety of information can be recalled or removed by touching the screen.

available on-line for use by the other work stations.

The OPLOG computer is primarily dedicated to its own set of functions. It converts the matrix output from the touch screen to RS-232 data and feeds the updated information to the CRT. The touch screen is composed of a standard 19-inch color monitor with a capacitive touch-sensitive overlay. This screen provides the human interface to the OPLOG computer.

The touch screen allows access to normally scheduled log events and gives the anchor complete control over all audio sources that would enter a typical console. The anchor can turn sources on or off and fade them by touching or wiping a finger across the computer screen.

In addition to controlling all live and recorded events, the touch screen also controls live copy. When a live commercial is required, the copy automatically appears in a screen window. An optional 13-inch, large-letter copy monitor is available, which allows scrolling and paging of commercials, PSAs, tags and other copy.

The OPLOG station is connected to four intermediate controllers: an audio switcher, five Instacarts, an electronic switcher and an automation decoder. All of the interface units are controlled via an RS-232 databus.

A second XT added to the network provides an editor's position. This work station is located in the newsroom and allows last-minute changes to the log and non-invasive access to the announcer. During call-in programs, the show producer screens the calls from this location and enters the information into the computer. As soon as the caller's name, town and telephone number are entered into the computer, they also appear on the anchor's screen. To place the call on the air, the anchor simply touches the screen. This work station also acts as the interface to the traffic department's large computer.


Audio switcher

The audio switcher is a module consisting of three major components: a serial-

Continued on page 102

Vidoli is director of technical operations and Oliver is maintenance engineer at WEEI-AM, Boston.

A better switcher, built around a better chip. At Camera Mart.

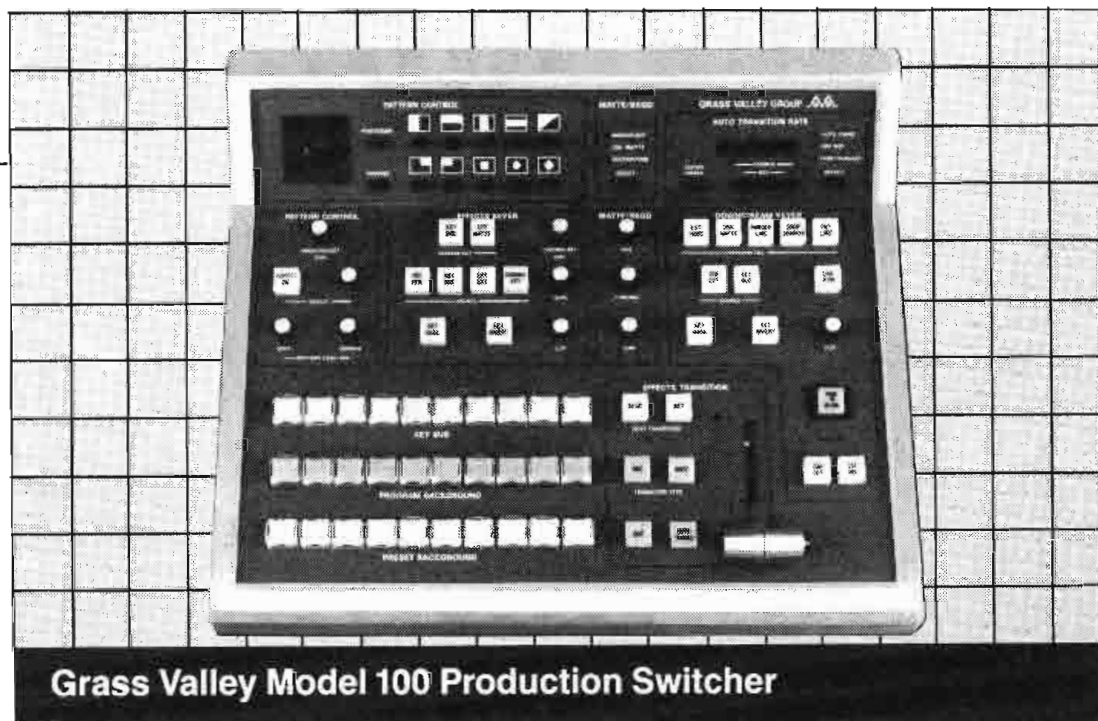

Using a newly developed hybrid integrated circuit, the new Grass Valley Model 100 production switcher gives you all the quality and performance of its bigger brothers—the 1680 and 300 series plus better keying and wipes.

Grass Valley's 25 years of industry leadership gives you quality you can see and feel instantly, with waveform stability that assures circles stay round and squares stay square even when greatly reduced.

The Model 100 has a unique three bus/multi-level mix effects system; eight looping video inputs with black and color background; a Borderline Generator for title borders, drop shadows, or matte filled outlines; look-ahead preview system and much more.

Much of the logic for creating multi-level effects is built into the control memory. And the logical, attractive control panel makes the Model 100 as easy to use for a newcomer as for the most seasoned pro.

It's new, and, as you'd expect, it's available right now from Camera Mart.

**The more you know about video, the more you can
rely on Camera Mart.**

The Camera Mart, Inc.
SALES • SERVICE • RENTAL

Headquarters/New York
456 West 55th Street, New York 10019
(212) 757-6977
Telex: 275619/FAX (212) 582-2498

Upstate/Central N.Y.
305 Vine Street, Liverpool, N.Y. 13088
(315) 457-3703 FAX (315) 457-3795

California
1900 W. Burbank Blvd., Burbank,
CA 91506 (818) 843-6644

Indiana
825 Royal Avenue, Evansville,
Ind. 47715 (812) 476-6327

Circle (75) on Reply Card

Automated CDs simplify use

As compact discs become more popular, music stations are experiencing a need to be able to quickly cue and play selected cuts. DJs used to tossing a record on a turntable, locating the cut and pressing play, often find using the CD a bit more complicated.

The announcer now has to know the cut number before a CD can be played. Also, because the CD players used in many stations are consumer decks, durability may pose a maintenance problem.

Some stations elect to solve these two problems by dubbing the CDs to cart. Unfortunately, when this is done, the sonic advantages of using a CD may be lost.

The final problem with the use of

CDs lies in their cost. The loss or damage of even a few CDs can quickly mount into a sizable replacement bill.

Automated solution

Stations that rely on large numbers of CDs can help solve these problems through the use of an automated controller and a CD multiplayer. The computer provides the control and the CD player provides security. The equipment combination provides the announcer and the station with quick access to the records, a controlled play list and secure storage.

The CDs are mounted in a CD multiplayer, which typically holds up to 100 discs. If more storage is desired, the players can be chained together for prompt access to hundreds of CDs.

The key to effectively using such a large CD library lies in computer-assisted automation. The CD title, artist, timing and category information for each listed song is stored in the computer. The air personality can select any song for air play, providing the programming department has authorized the song's use. The software can even control at what times during the day any song can be played. If a particular song does not fit the rotational clock, it can't be played in error. Also, because all of the events taking place are recorded in the computer, a program director can receive a print-out of all of the cuts played and the time they were aired. This type of information can make sophisticated programmatic reviews possible.

Operation

To select manually or to automatically cue or start the song, the DJ simply touches the screen. The selected block instantly changes color, providing positive confirmation of the desired action.

Any number of CDs can be programmed in any sequence for automatic playback. This feature allows the announcer to preprogram a segment, providing relief for other duties.

Because the entire system is software-controlled, additional features can be easily built in. For instance, pop-up notes can appear on the screen, either automatically or at the press of a square on the CRT. This feature might prove useful in music programming for noting important facts about a particular artist or song about to be played.

Live-assist automation can, for some stations, provide that useful link between human and machine. Today, full automation may not be the answer to a station's unique needs. Partial automation may, however, be a useful tool. This idea represents another way in which computers can improve the productivity of a broadcast station.



NATIONAL CONVENTION

BROADCAST
engineering
CONFERENCE

Don't miss it:

The second annual SBE National Convention and Broadcast Engineering Conference

Plan now to attend the *working* engineer's convention. View the latest in broadcast equipment from leading manufacturers. Attend technical sessions designed to provide practical answers for the problems faced by broadcast engineers. Building on last year's outstanding success, the 1987 convention will provide more exclusive exhibit hours and an outstanding line-up of the industry's best technical experts.

The SBE National Convention and **Broadcast Engineering** Conference — the *must-attend* event for this fall.

**A.J. Cervantes
Convention Center
St. Louis
November 10,11,12**

TO BOLDLY GO WHERE NO SNG VEHICLE HAS GONE BEFORE.



Roscor Corporation has recently unveiled its entry into the Satellite News Gathering market, the "Star Fleet 21". The challenge for our experienced team of electronic, structural and satellite engineers was to design and fabricate a Satellite News Gathering vehicle that's smaller and lighter than most SNG trucks; a vehicle with lots of space for storage and seating for four in a functionally beautiful interior; to construct a vehicle which *doesn't* resemble a waste removal truck and to design this vehicle to meet the stringent specifications of Ku band transmission yet still be a pleasure to drive and work in.

The result is the "Star Fleet 21", a completely unique concept in SNG vehicles.

Totally fabricated by Roscor, a leader in the design and construction of mobile and fixed teleproduction systems, on a domestic cutaway chassis, the "Star Fleet 21" gives you exactly what you need in an SNG vehicle. Its computer-designed "Rigid Rak" system allows the satellite dish to be mounted directly over the equipment racks. This eliminates the need for additional, ponderous support frames necessitating a heavy, highly modified vehicle with a tag axle or custom parts. In addition, the antenna location eliminates unnecessary transmission line loss. And inside there's plenty of room for all your editing needs, four spacious equipment racks and 46 square feet of standing area.

If you'd like to be a part of the future in Satellite News Gathering vehicles, take a bold step up to the "Star Fleet 21" from Roscor Corporation.

ROSCOR Star Fleet 21

Roscor Corporation • 1061 Feehanville Drive Mount Prospect, Illinois 60056 • Phone (312)539-7700

Circle (77) on Reply Card

www.americanradiohistory.com

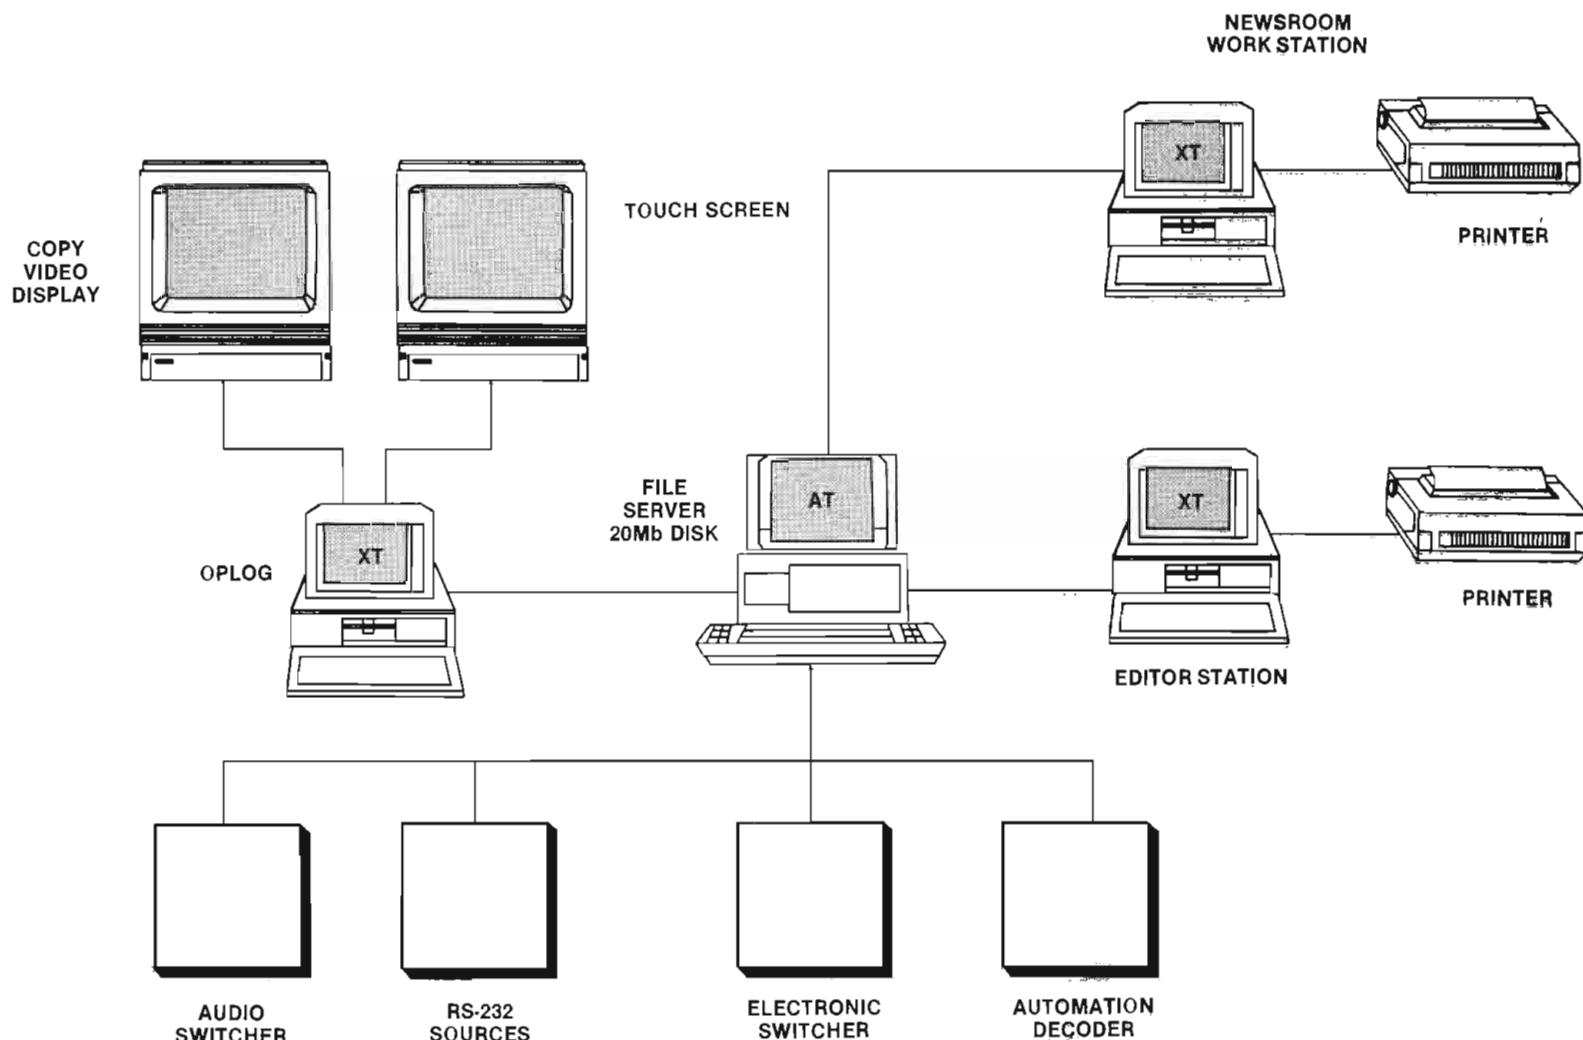


Figure 1. the heart of the Media Touch system is the software residing in the file-server computer. This computer controls the RS-232 bus and directs data between the other devices.

Continued from page 98

to-parallel converter and two audio switcher assemblies. The audio switcher provides 32 inputs and eight outputs. All of the assignments are software-controlled via the touch screen. The switcher outputs are assigned to the transmitter, mix-minus for private-line news exchange, recording feed line and two level-adjustable feeds. The announcer can control the volume on these two lines by wiping a finger across the CRT screen.

The audio switcher inputs rely on op-amp circuitry and take levels ranging from -60dBm to $+8\text{dBm}$. This allows us the flexibility to patch anything from a microphone to a cartridge machine directly into the switcher. Measurements show the crosstalk to be quite low, at -70dBm .

There are two inputs that are not controlled by the computer: the announcer's microphones and the combined audio feed from three cart machines. These devices are located in the studio next to the operator's position. In the event that the touch screen fails or the system needs rebooting, on-air operations can continue without interruption.

RS-232 interface

The RS-232 interface module ties all of

the control lines together. At our station, the RS-232 sources include the audio switcher and five Instacarts. A music station could easily use this control line to access CD players or other RS-232-controlled audio sources.

The electronics switch provides a software-controlled switch to ground when any channel is activated by the audio switcher. This ground can be used for controlling ancillary devices such as tape machines, telephone lines and delay systems.

Automation decoder

The automation decoder is designed to decode tones from any network source. The decoder takes the information, which is usually a simple relay closure, and converts it to RS-232 data. This data, in conjunction with secondary cue tones on cartridges, allow the system to operate in full automation during the overnight shift.

Performance

Because the system is 90% software, there is little possibility of mechanical failures. In just a little more than a year of continuous operation, we have experienced about one hour of down time.

The worst thing that can happen is that the touch screen freezes, not allowing

the anchor access or control. If that happens, the anchor can read a PSA or play a recorded segment from any of the three cart decks, which bypass the automation system. The entire system can be rebooted in about 15 seconds.

The initial operator resistance was quickly overcome by the system's user friendliness. A glance at the touch screen shows how easy it is to operate. In fact, what isn't self-explanatory is explained through system help menus that guide the operator through the operation.

Installation and maintenance

Installation of the system took about the same amount of time as it would to install a control board. The key steps were the installation of the audio switcher and the connection of the LAN.

Routine maintenance is simple, much like that conducted on any automation system and far simpler than for a combo board. Most of the system consists of software, and the main audio feeds are handled electronically. We do not miss having to clean spilled coffee from console pots and switches.

This level of automation and control may be new to many radio stations. For some engineers, the lack of hardware and the required computer interfaces may result in some hesitancy to embrace

Get In Control !!

Q-Star IIA

Automated Playback System

Feature highlights:

- > 500 event memory with subroutines, protected in battery backup RAM
- > Adjustable preroll, postroll, delay, crosspoint assignable (net, black, error)
- > Distributed intelligence LAN coax network (VSIO units)
- > Real time clock / calendar with battery backup
- > Tape cueing by tones on audio track, FSK data, SMPTE, or manual
- > Handles up to 20 VTR's / multi-format
- > Print list / Print "as run" log
- > Optional multi-keyboards
- > Audio follow vertical interval stereo 10X1 switcher (optional 18X1 or multiple switcher capability)
- > Television standards: NTSC/PAL/SECAM/PAL-M



The Q-Star IIA components can be ordered individually to enhance your present system, or combined into a complete system (similar to the one pictured) to meet your operational specifications. For more information contact:




Advanced Television Automation

211 Weddell Drive • Sunnyvale, CA • 94089 • (408) 745-1700 • TLX 294530 VMED UR

Circle (106) on Reply Card

April 1987 Broadcast Engineering 103

Figure 2. Added options can expand the system to incorporate almost every station function, including news and accounting.

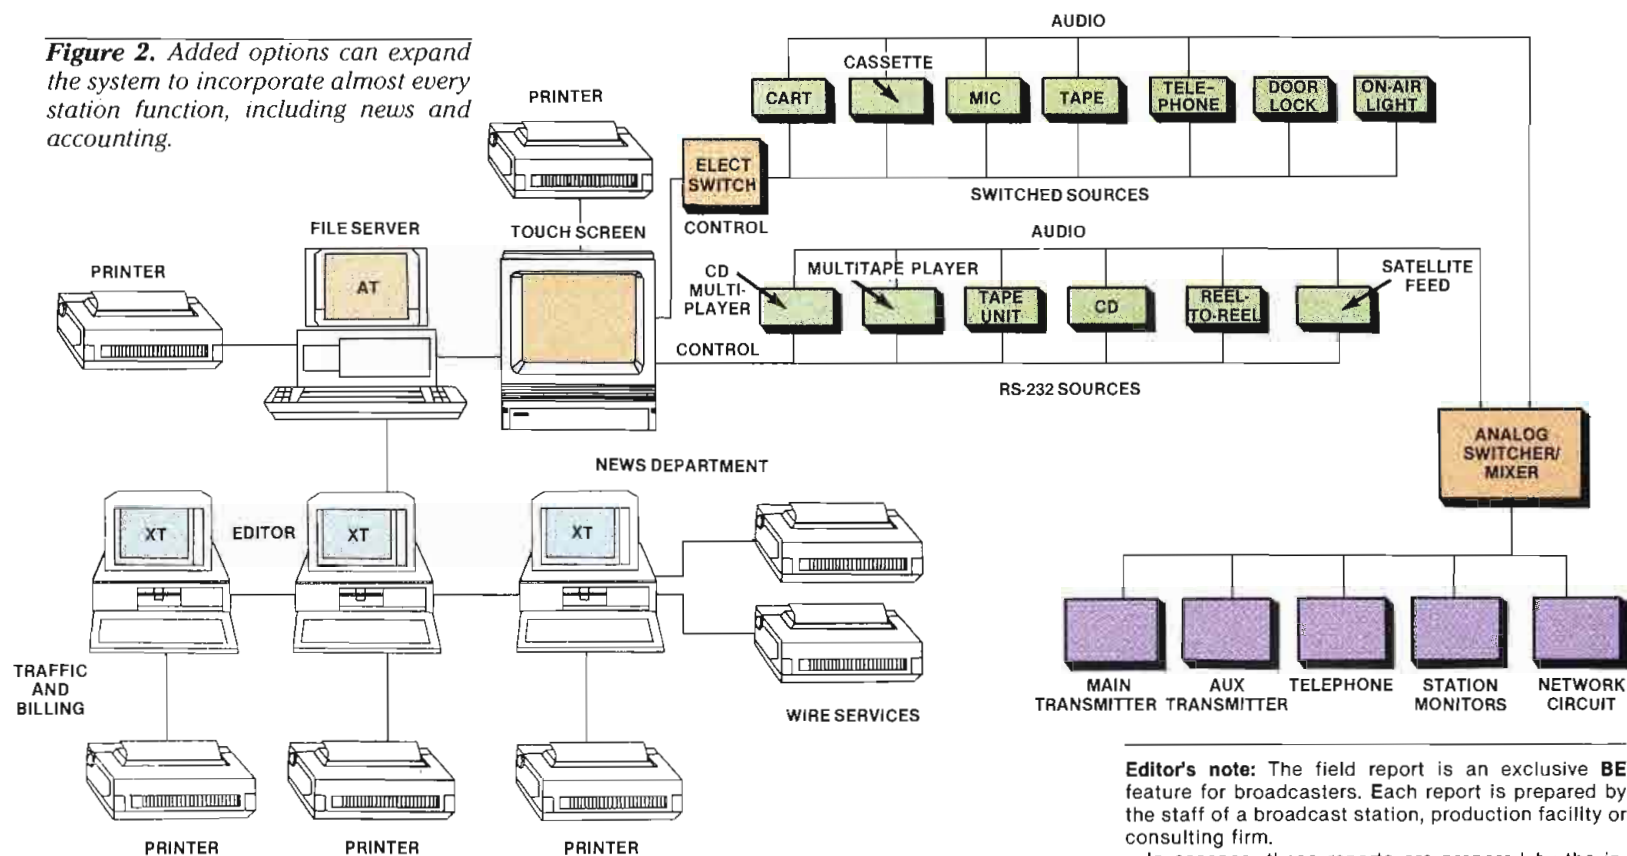

the technology. However, the step into the world of computer-controlled broadcast studios is inevitable, to some degree.

At WEEL-AM, the Media Touch 2005 control system enabled us to not only automate the overnight operations, but also

make the daytime anchor's job easier. The integration of on-air control with the station's traffic and billing computer makes a great deal of sense, not only from an operational standpoint, but also from a business standpoint.

Editor's note: The field report is an exclusive **BE** feature for broadcasters. Each report is prepared by the staff of a broadcast station, production facility or consulting firm.

In essence, these reports are prepared by the industry and for the industry. Manufacturer's support is limited to providing loan equipment and to aiding the author if support is requested in some area.

It is the responsibility of **Broadcast Engineering** to publish the results of any piece tested, whether positive or negative. No report should be considered an endorsement or disapproval by **Broadcast Engineering** magazine. [:-)]

Will Your Station Be Next?

One violent strike and you're fried—downtime and lost revenue. Only our unique surge protection truly handles the big hits without exposing your equipment. Competitive systems can't. Before you get hit...call us.



L.E.A. Dynatech

12516 Lakeland Road, Santa Fe Springs, CA 90670 • TWX 910-586-1381 (in CA) (213) 944-0916 • (outside CA) (800) 654-8087

Circle (78) on Reply Card

SEEK PROFESSIONAL HELP.



42B 2-Track Recorder/Reproducer



Hour after hour in a padded room can drive you a little close to the edge. And you don't need any extra trauma from your 1/2-track.

Tascam's new 42B 2-channel, 2-speed, 2-track recorder/reproducer will take your day-in, day-out, all-

day, all-night schedule in stride. And features like +4 dBm XLR in and out, balanced mic inputs for field use, 250/320 nWb/m, and front-panel controls reduce stress in even the most harried engineer.

Call or write TASCAM for the full story on the 42B. Because it's a

crazy world out there. And there's no shame in seeking professional help.

TASCAM
TEAC Professional Division

7733 Telegraph Rd. • Montebello, CA 90640
Telephone: (213) 726-0303

Circle (79) on Reply Card

Control via Dynabus

By Carl Bentz, special projects editor

Designers face a technical problem in interfacing equipment into a system. Remote-control schemes, although generally an equipment feature, often differ according to the manufacturer. A simple switch closure starts and stops the VTR or puts it into record mode. The same cue steps a character generator to its next sequential message or initiates a new signal path through a routing switcher. Some type of feedback, usually an indicator lamp, shows the operator that the desired event has occurred. And all of this costs only one wire per function per machine.

The genre of today's systems is oriented to microprocessor control, possibly with a human assistant as overseer. In this regard, one design goal is to derive a method by which various devices (production equipment, switchers, character generators, business systems and transmitter monitoring/control equipment) can talk to one another through a common, single-pair communication link. The concept goes well beyond simple machine control.

With microprocessors, programmable, intelligent devices can be designed. Such equipment not only responds to tape motion commands, for example, but also can generate a status report of its operation. That status can show a VTR to be in play mode, and it also can signal at least some malfunctions within the monitored circuitry, providing alarms to alert the operator. Conceivably, feedback from one device can trigger the central auto-



mation computer to reassign the task to another device.

A language defined

Over a period of several years, representatives of manufacturers around the world met repeatedly to formulate a common control system that could be implemented at any facility. The results of those efforts evolved into the EBU-SMPTE or EBus control standard. The EBus follows the theoretical, 7-layer open system interconnection (OSI) structure derived by the International Standards Organization (ISO). Successful demonstrations of this network with various manufacturers' products have been presented at recent trade shows. Those involved in its development should be given credit for their accomplishment. A difficult part of that network remains to be solved—convincing all manufacturers to design equipment to match the network or to provide interfacing units.

There is concern regarding some parameters of the EBus. One is the use of one central processor to maintain system control. If that processor fails, then a second processor with appropriate, automatic-alarmed switchover provision is needed for system reliability. The cost of an additional processor can be great.

Another concern is the data rate specified for EBus—38.4kbaud. The trend to more digital equipment and the desire to create a communication path through a common machine control network suggests a need for several multiwire buses routed to each machine and control panel to handle the possible data flow. If the central control processor must deal with additional buses, an inevitable reduction of operational speed results.

Disconnecting a device from an EBus system requires a multibus, loop-through, detachable connector, containing either a complex splitting network or several bypass relay circuits. The connector is needed because removal of a device from the network must not affect the reliable operation of other devices on that network.

Searching for solutions

As the Utah Scientific engineering staff

began development of a machine control system, they considered various network structures that existed or would soon be available. Various LAN (local area network) concepts were examined. Token passing systems were rejected, because in the systems, the failure of a single device will usually lead to immediate system failure. Polling systems also fell by the wayside for failure mode reasons.

Instead, a system was sought that would be reasonably priced, operate at a high data rate, be reliable and immune to single-point failures. The requirements were filled by CSMA/CD technology (carrier sense, multiple access with collision detection). Dynabus is the design that evolved.

The system structure does not revolve around a central processor, and no single active device is essential to successful network operation. Data buffers isolate each drop cable to a controlled device from the network bus. A bypass relay automatically disconnects the device transmit chip from the bus when a tap is disconnected or if power is removed from the device. A transformer detects high transmitter output current that results when data collisions occur, rather than seeking the absence of an ACK (acknowledgment) signal from an intended recipient to detect a transmission failure.

The system operates at a sufficiently high data rate that numerous devices and systems may be connected to the same network, including edit suites. The network allows random machine assignment from a central equipment pool, eliminating inefficiency that is inherent to dedicated equipment, cross-patching or control cables.

The network is managed from a simple computer terminal, which serves as the user interface. In addition, the computer allows diagnostics to analyze the system, providing the capability to detect insidious failures and to reconfigure potential problem areas. A printer tied to the computer records events.

The system structure

First, the network links equipment through 150Ω twinax cable, segments of which should not exceed 1,000 feet. Sev-

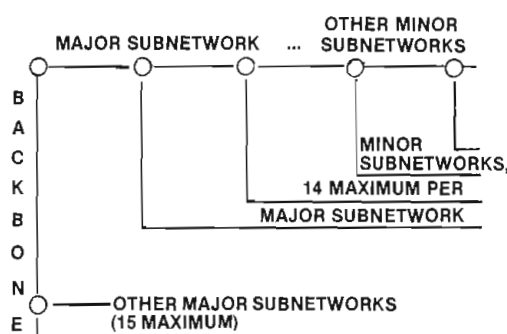


Figure 1. Node controllers, represented by 0, control the passage of information from one part of a network to another.

eral controlled devices may connect to each segment and communicate with one another through this rudimentary network link. Segments may interconnect through repeaters.

Two networks join at a node. A node controller tackles the movement of messages from one network to the other at the node point.

Typical broadcast stations will probably use only a single network, but the system topology supports as many as 226 interconnected networks. These would be arranged as a backbone or spine, with up to 15 nodes or major subnetwork links. Each subnetwork may in turn contain a maximum of 14 node controllers, leading to minor subnetworks. Controlled devices connect to the minor subnetwork portions of the system. (See Figure 1.)

Each segment can support a maximum of 100 devices, while each network can address as many as 32,767 devices. For a complete system implementation (15 major subnetworks, each with 14 fully loaded minor subnetworks), a maximum of 6,881,085 devices could be addressed by a single network.

Addressing

In a control network, a means to direct messages to individual devices is necessary. That is, each device has a unique 16-bit address, which is assigned by the user with a DIP switch at each device. Devices on other subnetworks may have identical addresses because they are separated from one another through node controllers.

Two restrictions are placed on address assignment. The least significant bit must be a 0, leaving all addresses as even numbers. Also, address 0 (or 0000) is reserved from routine device assignment.

Sending a message to a specified device requires that the major and minor subnetwork addresses are known. This is encoded in a single byte with the four most significant bits indicating the major subnetwork and the least significant four bits specifying a minor subnetwork.

Every device on a Dynabus system has one or more group addresses, allowing a machine to communicate with a group of devices in one communication sequence. Each device may belong to any of 32,767 different groups. A group address uses the same two bytes as individual addresses, but they differ in the least significant bit being a 1. All odd-number addresses are valid except FFFF.

Message routing and handling is determined largely by a node, or most significant, address byte. If the node address (NA) byte of a destination address (DA) matches the current subnetwork, the message moves only along the originating network. When the least significant

Exclusive, triple patented dynamic cap and coil analyzing . . . guaranteed to pinpoint your problem every time or your money back



with the all new LC75 "Z METER 2"
Capacitor Inductor Analyzer
Patented \$995

The "Z METER" is the only LC tester that enables you to test all capacitors and coils dynamically — plus, it's now faster, more accurate, and checks Equivalent Series Resistance (ESR) plus small wire high resistance coils.

Eliminate expensive part substitution and time-consuming shotgunning with patented tests that give you results you can trust every time. Test capacitor value, leakage, dielectric absorption, and ESR dynamically; with up to 600 volts applied for guaranteed 100% reliable results — it's exclusive — it's triple patented.

Save time and money with the only 100% reliable, in- or out-of-circuit inductor tester available. Dynamically test inductors for value, shorts, and opens, automatically under "dynamic" circuit conditions.

Reduce costly parts inventory with patented tests you can trust. No more need to stock a large inventory of caps, coils, flybacks, and IHVTs. The "Z METER" eliminates time-consuming and expensive parts substituting with 100% reliable LC analyzing.

Turn chaos into cash by quickly locating transmission line distance to opens and shorts to within feet, in any transmission line.

Test troublesome SCRs & TRIACs easily and automatically without investing in an expensive second tester. The patented "Z METER 2" even tests SCRs, TRIACs, and High-Voltage Diodes dynamically with up to 600 volts applied by adding the new SCR250 SCR and TRIAC Test Accessory for only \$148 or FREE OF CHARGE on Kick Off promotion.

To try the world's only Dynamic LC Tester for yourself, CALL TODAY, WATS FREE, 1-800-843-3338, for a FREE 15 day Self Demo.



Call Today Wats Free 1-800-843-3338

SENCORE

3200 Sencore Drive
Sioux Falls, SD 57107
605-339-0100 In SD Only

*innovatively designed
with your time in mind.*

Circle (80) on Reply Card

April 1987 **Broadcast Engineering** 107

A Good Reason To Call RTS When You're In The Business Of Recording On Tape.



Our Model 927 Programmable Reference Tone Generator adds a new dimension to tape recording quality assurance.

Operating in a *stereo* mode, it is user programmable with discrete tones, pink noise, noise reduction tones, phase check, stereo I.D. and more.

We think the 927 can improve your audio business. Please call or write for descriptive literature.

PROFESSIONAL INTERCOMMUNICATIONS • PROFESSIONAL AUDIO PRODUCTS

Circle (81) on Reply Card

RTS SYSTEMS
INCORPORATED

1100 West Chestnut Street • Burbank, California 91506 • Telephone 818 840 7119 • Telex 194855 • Telefax 818 842 4921

four bits are 1s (mmmm1111), and the most significant four bits match the originating major subnetwork, the message is distributed to all minor subnetworks linked to the originating major subnetwork. If the most significant four DA bits are 1s, the data is directed throughout the system or to selected minor subnetworks, according to the least significant four bits.

A global address also is available to send data to all devices on the system. The global address is 16 1s. Routing of global messages is determined by the most significant address byte, according to group addressing.

An address consists of 24 bits, as illustrated in Figure 2. The first eight form the node address. The next 16 bits form a local device address (LDA). Messages must contain both designation address (DA) and source address (SA) fields, each consisting of NA and LDA segments. Note that Dynabus differs from IEEE specification 802.3, which calls for either two bytes or six bytes for each address.

Group addresses

The machine control system is assigned to the first two global (odd) addresses. Control sources are group number 1, while command execution units are group 3. A control source is any station that needs to know machine status. A status change at any machine is transmitted to group address number 1. Stations capable of executing advanced machine control functions belong to group 3. A next event command transmitted to group 3 addresses suggests that multiple commands execute simultaneously.

The routing switcher claims group addresses 5 and 7. Group address 5 is the destination address of router status messages. Router commands are directed to group address 7 because multiple control cards may exist for the routing switcher.

The current time is available to all stations listening to group address 9. The current time of day is periodically transmitted to group 9.

Other addresses are available.

Message construction

Messages must conform to a generalized format. The structure consists of a preamble (P) field, a start-of-frame delimiter (SFD) field, a DA field, an SA field, a message ID (MID) field, a data (D) field and a frame-check sequence (FCS) field. Frame-check sequence is synonymous with cyclic redundancy check (CRC) used in conjunction with error correction.

The P field synchronizes the phase-locked loop of all receiving devices to the incoming data and clock stream. It acquires use of the local network for transmit procedures. A duration length (usually three bytes) is determined by the longest network attached to the system.

The duration must be sufficient for all devices to see the P field before its transmission is completed. In this field is a repeating sequence of 1s and 0s, which must begin with a 1 and end with a 0.

An SFD field signals the end of the P field with the unique bit pattern [10101011]. The 1-byte-long field also signals the beginning of the following destination address field.

In the DA field, three bytes provide addressing for the destination of the message to a device or group of devices. It is followed by the 3-byte SA field to allow a receiving device to determine the source of the message and to permit quick 2-way communication.

The MID field defines the message type as system or DA-specific. The most significant bit indicates the type. The seven least significant bits represent a message type selector.

All devices connected to the network must receive and respond to all system messages, of which there are 127 possibilities. Each specifies certain requirements for the format of the D field.

Messages directed to specific DA addresses are applicable only to that device. The format of the remaining seven bits will be defined by the manufacturers of devices intended to communicate through this system.

The D field contains a cue for the receiving device to make sense of the message. The format of the D field is defined by the MID field. DA-specified D fields are described in the protocol definition from the device manufacturer. No minimum number of bytes is required in the D field, but it cannot be longer than 256 bytes.

The purpose of the FCS field is to check data integrity. The contents of an FCS field are generated by the transmitting device and checked by the receiving device. If field values match, data is accepted as correct. Calculations of the FCS value begin with the first byte of the DA field and end with the last byte of the D field. The value fills the 2-byte FCS field.

A standard CCIT HDLC polynomial determines the FCS value, transmitted as the 1s complement of the sum of the remainder of:


$$X^k \times (X^{15} + X^{14} + \dots + X^2 + X + 1) / (X^{16} + X^{12} + X^5 + 1).$$

In this relationship, k is the number of bits in the frame existing between, but not including, the SFD and FCS fields and the remainder after multiplication by X^{16} and the subsequent division by the generator polynomial $X^{16} + X^{12} + X^5 + 1$.

The FCS value is normally calculated by the LAN controller chip. Because the 2-byte length of the Dynabus FCS specification differs from the IEEE 802.3 specification of a 4-byte length, the 2-byte FSC

Finally, day-long comfort and...

NEW

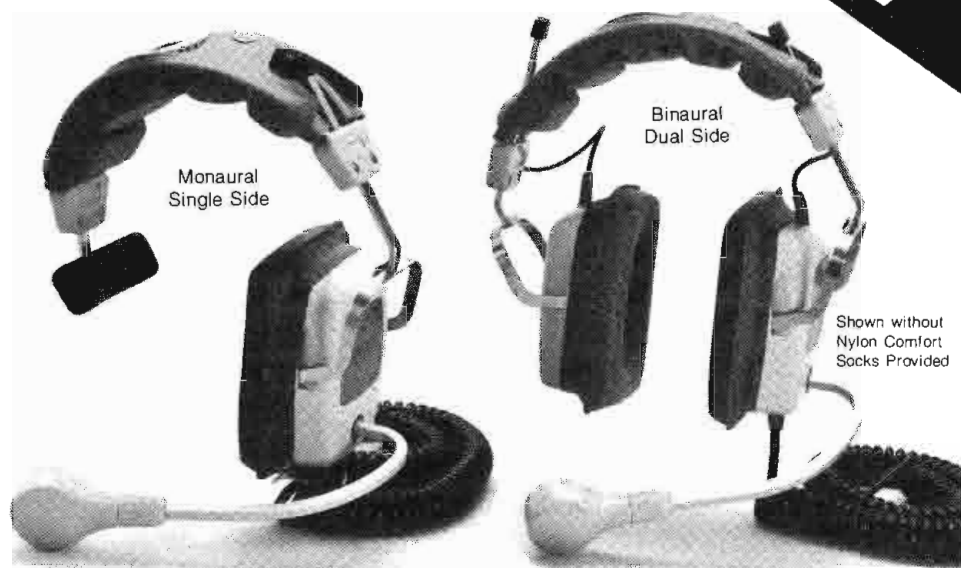


clear, two-way communications between camera and director.

This headset series is specifically designed to provide high quality communication through camera intercoms in television studios or remote locations. Telex camera headsets have sensitive carbon microphones with a smooth voice frequency range of 300 to 4500 Hz. They offer compatibility with Western Electric type intercom circuits and are available with or without push-to-talk switch for compatibility with most existing systems. The earphones contain high sensitivity magnetic receivers that can be easily removed and replaced in the field for convenience and economy.

Designed for comfort

All units are designed for long lasting durability and lightweight comfort that lasts throughout a long camera session. The headband and earphones have removable, soft foam filled pads covered in supple polyurethane that resists cracking even after years of constant use under hot studio lights or sunlight. The mike is housed on a boom that rotates on a swivel ball for full flexibility in positioning the mike to the mouth, while giving the user the option of wearing the headset with the mike on the right or left side of the head. Washable nylon earphone socks provide further comfort.

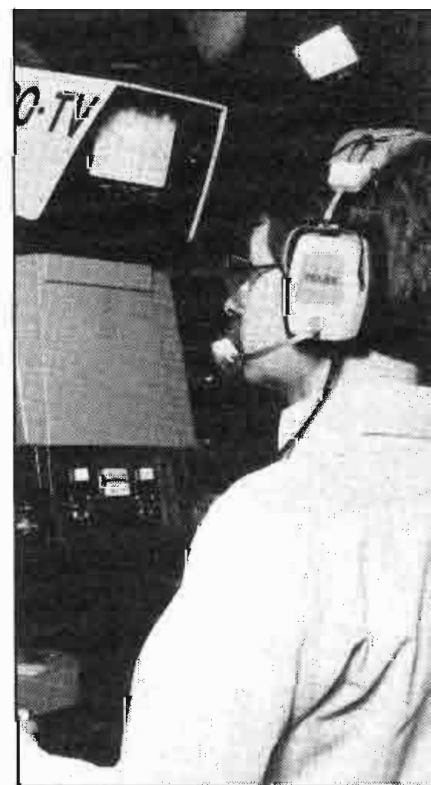

TELEX®

TELEX COMMUNICATIONS, INC.

9600 Aldrich Ave. So., Minneapolis, MN 55420 U.S.A., Telephone: 612-887-5550, 884-4051, telex: 29-7053

Circle (82) on Reply Card

24-BIT ADDRESS FIELD

8-BIT	16-BIT	8-BIT	16-BIT
NODE	LOCAL DEVICE	NODE	LOCAL DEVICE

Figure 2. The structure of all address fields contains node and local device regions.

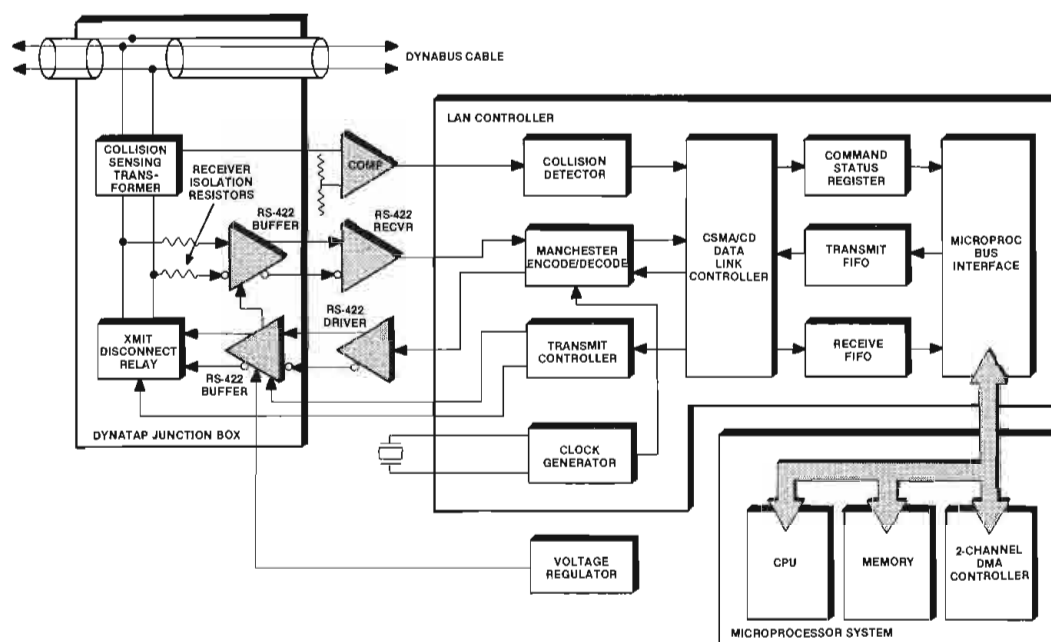


Figure 3. Block diagram of the Dynabus interface.

is not supported by available LAN chips.

System messages

An orderly application of a communications protocol can occur only if system messages are coordinated with other users. Without coordination, failure or confusion of the desired and actual communication results. Ten system messages are currently specifically defined as follows:

• Message 0: Final Response

A final response message results from some other system message. The D field data format is specified by the system message initiating the response. This response is identified by 0s in the seven least significant MID field bits.

• Message 1: Intermediate Response

An intermediate response message contains data as a response to other system messages, if the requested data cannot be contained or transmitted in one message. This interim format is used until only the few bytes remaining to be transmitted can be contained in a single final response message. The receiving station is responsible for concatenating (combining) a series of individual blocks into the complete message.

• Message 2: Report Errors

The report errors requests a receiving

REPRINTS

Interested in ordering article reprints out of this or another issue?*

Reprints can be excellent learning tools for your technical staff and great marketing tools for your sales staff. Call or write Cynthia Sedler at Intertec Publishing Corp., P.O. Box 12901, Overland Park, KS 66212; (913) 888-4664.

*Minimum order 1,000 copies

Agile Omni, the industry's most advanced receiver designed by the most relied upon name in the business...Standard.

With the new Agile Omni, you need no other receiver.

Standard designed it for cable TV operators, broadcasters, CATV, SMATV, and business and special teleconferencing networks – now and in the future.

An onboard microprocessor permits selection of any band available from domestic satellites, including the 32-channel ANIK C2. Channel tuning provides direct reading of the transponder-assigned channel number and a format control permits selection of six frequency band formats – 24-channel C-band, SBS/USAT and Spacenet already installed. Select channel and format, and the microprocessor controls frequency, channel spacing, transponder bandwidth, audio

frequency and bandwidth, and antenna and video polarity – automatically.

Omni's flexible design can handle up to three separate subcarriers including stereo programming or data. Omni also will accept descrambling modules – eliminating the need for expensive add-on descramblers.

For CATV and SMATV applications, severe microwave terrestrial interference is minimized by optional internal SAW notch filters, automatically programmed to switch in. A 30 MHz low DG/DP LC bandwidth filter is standard, and a second internally installed optional filter of 18, 22, 26, or 36 MHz bandwidth can be controlled by the microprocessor, or manually switched.

Standard's proven RF


loop-thru circuitry and blockdown conversion technology combine, with better image rejection and lower differential gain and phase, to provide excellent video performance. C/N threshold is an impressive 6.5 dB at the wide 30 MHz bandwidth.

Agile Omni is an affordable, flexible receiver designed to keep you in business, a commitment Standard backs with its unique 5-year warranty program. Contact us for further information.

Standard Communications

P.O. Box 92151
Los Angeles, CA 90009-2151
Toll free 800/243-1357
(In Calif. 800/824-7766, ext. 275)


Engineered to a new Standard

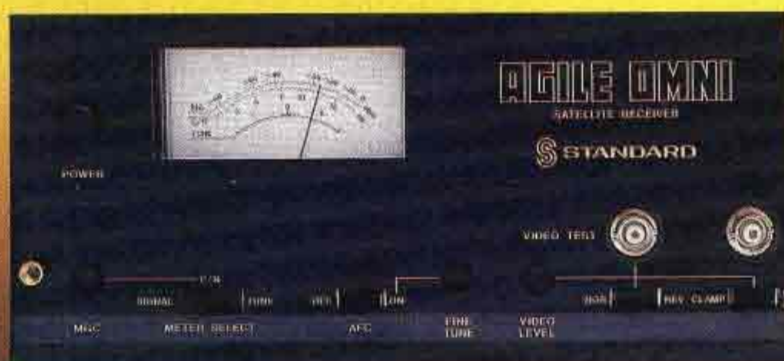

Operating functions including MGC, AGC, AFC, level sets, normal/invert video, clamp/unclamp video, skew, subcarrier frequency selection, video and IF test points are conveniently located on the front panel. Meter reads C/N ratio, signal strength or center-tune.



Format control enables selections of desired satellite system. Direct-reading channel selector displays transponder-assigned channel. Second selectable, subcarrier and space for optional third subcarrier or descrambler modules.

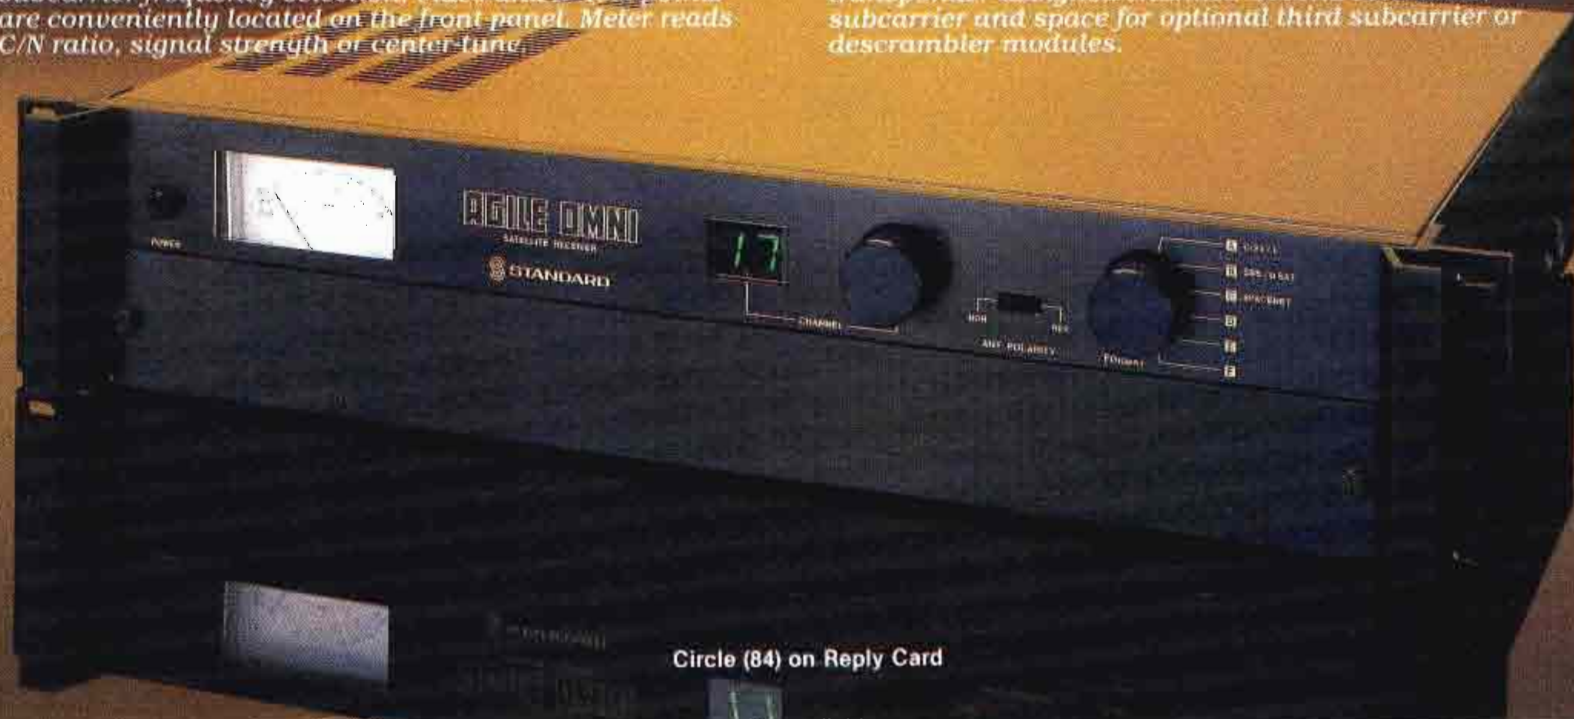

Circle (84) on Reply Card

TAPE MACHINE TESTING AND LOTS MORE!

Tape machine testing is just part of Audio Precision System One's repertoire. For tape, System One does:

- response on stereo machines—or multi-tracks to 192 tracks
- distortion across the entire spectrum
- wow and flutter, rotational and scrape
- MOL
- SOL
- separation (worst-case crosstalk on multi-tracks)
- azimuth adjustments
- phase vs frequency
- gap scatter on multi-tracks
- spectral analysis of noise

ANALOG TAPE: System One tests VTRs, ATRs, reel-to-reel, cart, cassette formats—two or three head—using tapes you make or standard reference tapes, even with voice between tones.

DIGITAL TAPE: System One's -100 dB (0.001%) distortion levels make it the selection of the leading manufacturers of digital recording systems. Try measuring the -85 to -90 dB distortion 16-bit PCM systems with a test set with -75 dB residuals!

AND LOTS MORE: Audio Precision's System One tests all audio equipment in your inventory—compact disc players, consoles, power amps, distribution amplifiers, switchers, transmitters. Even acoustical tests on loudspeakers and microphones.

Features such as:

- three forms of imd including transient
- complete, automatic custom test procedures created without knowledge of programming languages
- fast on-screen graphic or tabular results
- low-cost graphic hard copy via dot matrix printers make System One the most powerful choice in audio testing.

Call or write Audio Precision today for complete technical data and prices on System One.

Audio precision

P.O. Box 2209, Beaverton, OR 97075
503/627-0832 1-800/231-7350



Circle (67) on Reply Card

device to read and respond with the contents of its internal errors counters. This message is identified by an empty D field, with the FCS field immediately after the MID. A special organization of response information is initiated, as noted in Table 1. Error registers or counters are separately cleared to zero by a command from the system terminal (user's interface diagnostic panel).

• Message 3: Report Transmissions

A report transmissions order initiates the receiving device to respond with a number of messages sent following the last reset command. The D field of the response contains a binary representation of the number of messages, transmitted as two bytes, in low-byte, high-byte order.

• Message 4: Report Name

At a report name command, the device identifies itself with its designated name as a string of ASCII characters. The 32-byte D field of the response is padded with 0s (hexadecimal) for names fewer than 32 ASCII characters.

• Message 5: Receive Name

A receive name command stores a new name designator in the receiving device name buffer. The D field of the command is 32 bytes in length, padded if required, with 0s (hexadecimal).

• Message 6: Roll Call

When roll call is taken, the device responds by indicating its presence on the network.

• Message 7: On-line

The on-line message informs the receiving station that the transmitting station is on the line and prepared to receive messages. No response is generated for this system message.

• Message 8: Set Station Time

Internal real-time clocks are instructed to set the station time in response to the network system clock. A 7-byte D field contains month, day of month, hours (0-23), minutes (0-59), seconds (0-59) and hundredths of seconds (0-99), all as binary representations.

• Message 9: Reset Counters

At a reset counter message, the device clears all internal error and statistics registers to 0. No response is generated.

The design of Dynabus was formulated primarily for use in the broadcasting environment, providing fast and reliable communication for various control and data functions. Although it does have many similarities with LANs offered by the computer industry, the realistic needs of broadcasting have played a major role in the development process.

Editor's note: This examination of Dynabus is based upon documentation provided by Utah Scientific. It is used with permission.

!:-)))



Dead air is a broadcaster's biggest nightmare. In fact, everyone agrees that time is indeed money in broadcasting. To help keep your station alive and humming, rely on a source whose components are responsible for keeping untold hours of music and conversation flowing across the airwaves.

Today's demanding broadcast engineering executives count on Switchcraft jacks, connectors, plugs, audio adapters and everything else they need from our broad selection of standard, miniature and sub-miniature parts. That's tangible proof of our over 40 year commitment to excellence.



If you'd like that same sense of assurance day in and day out, call or send for our latest product literature. You'll discover

Circle (86) on Reply Card

our network of quality components is committed to stamping out dead air.

Send me information on your quality components:

- ☐ Please have a representative contact me.
☐ Please send me your General Line Catalog covering the complete Switchcraft line.

My area(s) of interest is:

- ☐ Switches ☐ Connectors ☐ Power Cords
☐ EAC Receptacles ☐ Jacks/Plugs
☐ Molded Cable Assemblies ☐ Patch Panels

My application is ☐ Current

☐ Future ☐ (date) _____

Name _____

Company _____ Title _____

Address _____

City _____ State _____ Zip _____

Telephone () _____

Mail To: Marketing Communications Dept.,
Switchcraft, Inc., 5555 N. Elston Ave.,
Chicago, IL 60630

B4-87

Switchcraft

A **Raytheon** Company

5555 N. Elston Ave.
Chicago, IL 60630
(312) 792-2700

Using the phone for remotes

By Jack Cunkelman

Using a telephone for remote communications and program feedback seems to be more popular than ever. Being able to communicate between the remote site and the studio is critical to effective production when using ENG and SNG equipment.

At WLWT-TV, providing return audio to reporters and trucks in the field has become an everyday task. To make the return link as foolproof as possible, I built a simple, yet reliable, device for non-technical operators. Although several companies can provide such equipment, building it myself saved a fair amount of money. The device is straightforward and provides excellent audio quality.

Operation

Most IFB and COM lines operate over automatically answered telephone lines. In the case of satellite feeds, the return audio is usually a mix-minus IFB signal. All the remote reporter or truck operator needs is a standard telephone with a detachable handset.

After contact is established between the studio and remote site, the telephone handset is disconnected from the tele-




phone. The custom amplifier box is then connected in place of the handset. The reporter can then adjust the volume to a comfortable level and begin operating.

It is important that the reporter not replace the now-disconnected handset back on the telephone cradle. To do so will immediately cause a telephone disconnect and the call will have to be replaced.

Construction

The entire unit is housed in a small

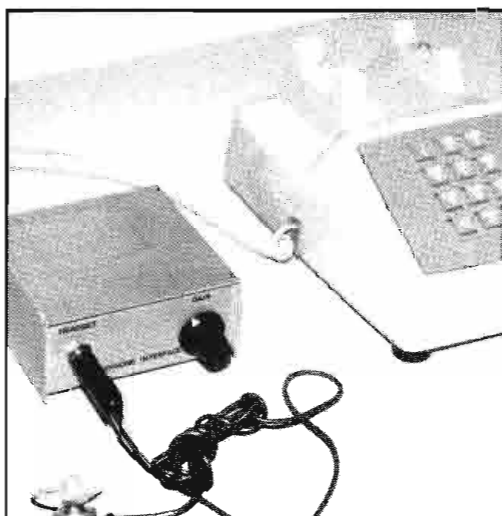

The interface replaces the telephone handset when in operation.

metal chassis. A plastic box can be used if you think it will stand up to your particular environment. Mount small rubber feet on the bottom of the unit to help it remain stable if located on a desk or tabletop. Don't assume anything. Label all jacks, connectors, knobs and switches.

The amplifier uses a readily available LM386 power amplifier IC chip. The chip is capable of 500mW of audio output and uses an easy to obtain 9V battery. Although this power level won't drive a low-impedance headphone to ear-splitting levels, the volume should be enough for most earphones, even in a noisy environment. A fresh battery provides about 12 hours of continuous use, which should be enough for most applications.

The schematic is shown in Figure 1. The IC amplifier chip gain is fixed at 20. Adding R1 provides a simple volume control. Resistor R3 and capacitor C3 prevent the amplifier from oscillating.

When the device replaces the telephone handset, a 600Ω resistor is connected across the telephone microphone wires. This load is needed to help keep the telephone hybrid balanced.

When constructing the amplifier box, remember that the modular handset jacks are not the same size as modular line jacks. The modular line jacks are larger, allowing for as many as six connections. The handset jacks are sized to permit only four connections.

Optional features

The amplifier box, as described, will accomplish its assigned task. It does a good job and is inexpensive. The design is, however, easily changed and other optional features can be added.

One useful addition might be a connector and switch to allow the handset to go on-line with the flip of a switch. This would make using the telephone more convenient.

The number of additional features is limited only by your imagination and budget. Now that the telephone industry has been deregulated, you are no longer limited to features provided by the phone company. Today, if you can build it, you can probably use it on your telephone line.

[: : : : :]

Cunkelman is manager of engineering maintenance at WLWT-TV, Cincinnati.

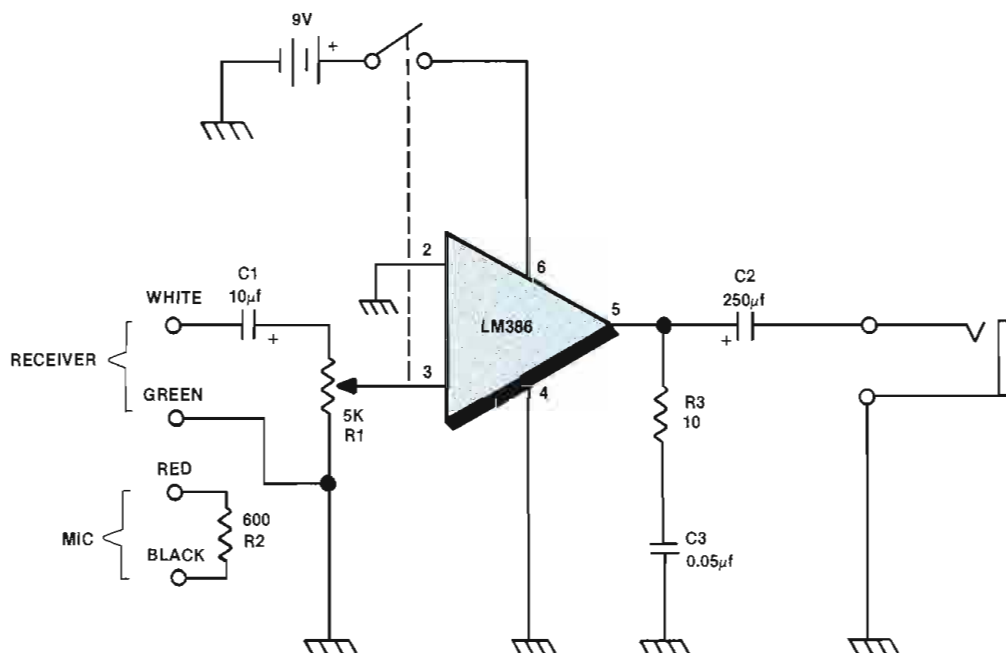


Figure 1. Schematic for the IFB telephone interface.

"MY XC-A1 IS GREAT IN LOW LIGHT SITUATIONS. LIKE FROM OCTOBER TO MAY."

GEORGE MILLER,
TAKOTNA VIDEO,
ANCHORAGE,
ALASKA




George Miller lives in Alaska and shoots documentaries. So half the year he's shooting at night.

That's why he replaced the camera he was using with a Sharp XC-A1. The picture is amazingly quiet. Even when he goes to 18db gain.

And thanks to all the information the XC-A1 displays in the viewfinder, George's job is a lot easier. Step-by-step instructions coach him on what to do, then disappear or move to one corner automatically.

Of course, George realizes that the XC-A1 can't do everything, so he still keeps the camera he replaced with it for one very important job—he uses it to anchor his boat.

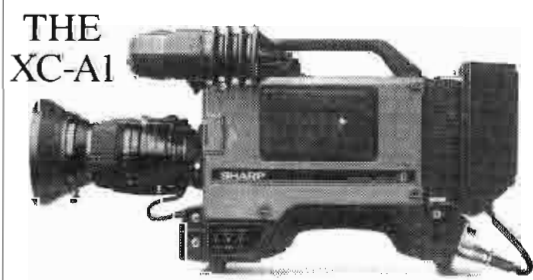

SHARP
FROM SHARP MINDS
COME SHARP PRODUCTS™

For more information call (201) 529-8731. Write Sharp Electronics Corp., Professional Products Division, Sharp Plaza, Mahwah, NJ 07430. Or visit your local Sharp dealer. © 1986 Sharp Electronics Corporation.

Circle (87) on Reply Card



Look ahead to 1987 national convention

By Bob Van Buhler

The SBE welcomed the support of four new sustaining members at the last executive board meeting. They include: Jampro, Sacramento, CA; Pacific Recorders and Engineering, San Diego; Richardson Electronics, East Rutherford, NJ; and Utah Scientific, Salt Lake City.

1987 national convention

The 1987 SBE national convention and **Broadcast Engineering** conference promises to be even bigger and more exciting than last year.

Joint radio-TV engineering sessions begin at 10 a.m., on Tuesday, Nov. 10. Attendees can begin their day with a cash continental breakfast in the convention center prior to the sessions. The morning sessions conclude at 12:30 p.m.

After a 1-hour lunch break, the afternoon sessions continue until 4 p.m. At that time, a reception will be held in the exhibit hall to celebrate the opening of the 1987 SBE national convention.

Wednesday activities kick off with a cash continental breakfast available in the convention center. The separate radio and TV sessions begin at 8:30 a.m. The radio sessions will break for lunch at 11:30 a.m. The TV sessions will continue an hour longer and break for lunch at 12:30 p.m. Each of the sessions will resume after a 1-hour lunch break and conclude at 6 p.m.

On Wednesday, the exhibits open at 8:30 a.m. and run concurrently until 7 p.m. Those who have a break in their sessions will want to tour the exhibit hall.

Thursday marks the final day of the conference. The morning period will be devoted to touring the exhibit hall. The exhibit hall opens at 8:30 a.m., after a cash continental breakfast. The exhibit hall will remain open until 3 p.m.

A 12:30 p.m. engineering luncheon will highlight the Thursday activities. As in last year's conference, the luncheon will feature an important industry leader.

The convention's final engineering sessions resume at 2 p.m. and conclude at 4 p.m. The convention has been planned with the attendee in mind. Thursday's

schedule will allow you time to enjoy all the activities and still have time to return home, if desired. The national SBE event will again be held in the Cervantes Convention Center in St. Louis.

SBE and BE are once again planning to publish the conference *Proceedings*. The *Proceedings* were a big hit last year. They are especially important when you cannot participate in all of the desired sessions. The *Proceedings* also provide the only way to obtain the graphs, charts and other visuals so important to many of the presentations.

In order to accommodate all of the expected exhibitors, the amount of hall space has been expanded to 525 booths. If you need additional information on booth reservations or other convention matters, call the St. Louis convention secretary at 314-928-6780.

1986 convention review

The 1986 national convention was a great success. Anyone who attended the event can attest to the enthusiasm and excitement that was generated. The hard work of the St. Louis SBE chapter and many others resulted in proceeds of \$36,745, which were donated to the Ennes Foundation and Scholarship fund.

In addition to the praise from attendees, the convention also received wide acclaim from the broadcast industry. Copies of the 1986 convention *Proceedings* are available from the national office for \$10.

New SBENET system operator

Chuck Kelly, board member, has assumed the task of assistant SysOp for the CompuServe SBENET. He will be responsible for coordinating and posting SBE-related information within the SBENET area. Chapters and individuals may direct their files and questions to Kelly either on CompuServe or at ITC/3M.

Kelly assumes the duties from Gerry Dalton, the society's first CompuServe SBENET SysOp. Dalton will remain active in the SBENET area and messages can be directed to him there. He also has been responsible for the installation and maintenance of most of the national of-

fice computer hardware and software.

Election ballot

The 1987 annual election is an especially important event for the membership. The bylaws revision proposal, which will appear on the ballot, may determine the quality of the national board members for many years.

Because of the way the original bylaws are constructed, large-scale changes cannot be adopted with a single vote. Rather, each bylaws revision requires a point-for-point vote. If you have questions on how the proposed changes might affect you and the organization, contact the national office, an SBE officer or board member. Additional information on the proposed changes will be presented in *Shortcircuits*, the *SBE Signal* and in BPForum on CompuServe.

New treasurer

Wally Dudash, long-time SBE member, officer and board member, has retired from Group W, creating an opening for SBE treasurer. Richard Rudman, SBE president, recently appointed Bill Harris, Duffy Broadcasting, Denver, as interim secretary. Harris will serve the remainder of Dudash's term and run for treasurer in the next election.

The society will miss Dudash's valuable participation at the national level. He served the society in yeoman fashion for many years and we all wish him a long and happy retirement.

Update on coordinators

James Lies, chairman of the Northern Indiana/Southwest Michigan frequency coordinating committee pointed up a change in the coordinator list that appeared in January's "SBE Update" column. Lies advised BE that his group recently took on additional areas beyond the South Bend perimeter. If you need coordinating help in the Northern Indiana or Southwest Michigan area, call Jim at 219-293-5611.

Van Buhler is chief engineer for WBAL-AM and WIYY-FM, Baltimore.

Triple Play

Videotek's new combo monitor gives you more inputs, more output and more memory for less money.

Only Videotek's TVM-620 waveform monitor/vectorscope gives you three selectable inputs for multiple viewing combinations, a roster of other winning features and the economy of a two-in-one unit.

Parade or overlay modes let you view any combination of up to three inputs simultaneously with one touch of our new membrane control panel. And ours is the only combo monitor that currently offers user-defined, one-button memory recall.

For those who need absolute SCH phase monitoring, our new VPH-360 can be added to provide that capability inexpensively. This unit interfaces with any vectorscope.

Engineers look to Videotek for thoughtfully-designed equipment that's built to be reliable and priced to be in your ballpark. See your Videotek dealer today about the TVM-620 plus our full line-up of test equipment.



Triple Filter Parade—
1 H each of Flat, Low Pass and Chroma Filters



Triple Vector Overlay—
SMPTE Bars on A, B and C inputs delayed by 6° and 12° to demonstrate phase error



Combination Display—
Simultaneous waveform and vector displays of a single input



VIDEOTEK INC.

Designed for real needs.
Priced for real budgets.

243 Shoemaker Road,
Pottstown, Pennsylvania 19464
(215) 327-2292
TWX 710-653-0125 FAX (215) 327-9295

Circle (90) on Reply Card

Tom Nielson has been appointed vice president in charge of marketing for Spectra Image, Los Angeles.

David Burns, national sales manager, Allied Broadcast Equipment, Richmond, IN (medium audio); **Ed Youskites**, marketing manager, broadcast products, Grumman Electronic Systems, Great River, NY (small video); and **John Phelan**, marketing manager, professional products, Shure Brothers, Evanston, IL (small audio), have been elected to the 9-member Exhibitors Advisory Committee. They were elected by companies exhibiting at the NAB convention.

They will serve 3-year terms that began

March 31, the closing date of the convention. They represent audio and video exhibitors occupying small and medium areas of the exhibit floor.

Committee representation is based on type (audio, video and outdoor exhibits) and amount of exhibit space: small (100-400 square feet), medium (401-1,600 square feet) and large (more than 1,600 square feet). The committee was organized in 1985.

Henry Lasch has been appointed to the newly formed position of national sales manager for Cubicomp, Hayward, CA. He is responsible for the company's domestic sales force, with all U.S. regional managers reporting to him. He

is a former Eastern regional sales manager for the company.

Erich Friend has been appointed lighting specialist for the Dallas region at Victor Duncan, Irving, TX.

David Ray has been appointed as the national manager for Monster Cable Products, Professional Products Group, San Francisco. He also will head up the OEM and government sales divisions.


Bob Webb, Grass Valley Group's national sales manager, has been chosen as vice president of marketing for GVG subsidiary, Dubner Computer Systems, Paramus, NJ. [:-:~)]]]

- Audio Follow Video
- Balanced Stereo Audio
- Rack Mount 19" x 1-3/4"
- BNC Connectors - Video
- Multiple Edge-Board Audio Connector
- Centralab Switches - Interlocking
- Bifurcated Silver Contacts
- Legend Strip
- Unswitched Video Terminated - 75 OHMS
- Unswitched Audio Easily Terminated
- No Signal Loss
- No Signal Degradation
- Cross Talk Better Than -60db
- No Power Required
- Simple Construction - Long Life
- Light Weight - Under 5 lbs.



THE IDEAL WAY TO SWITCH MONITOR FEEDS
IN A PROBLEM-FREE, ECONOMICAL MANNER.

10 x 1 PASSIVE SWITCHER

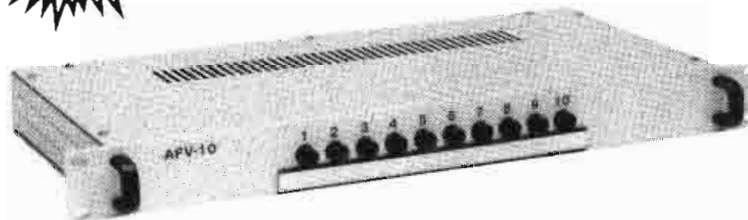

LOW COST
\$295.00


Model AFV - 10

H.M. DYER Electronics, Inc.

48647 Twelve Mile Road Novi, Michigan 48050 (313) 349-7910

Circle (92) on Reply Card

COMPONENT TELEVISION SIGNAL MONITOR

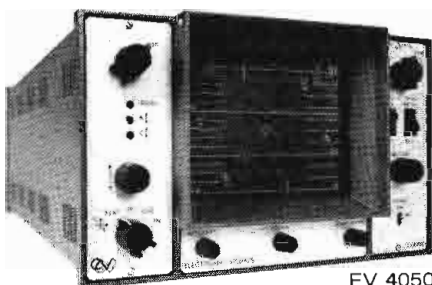

EV 4050

PLUS Vector display of
color diff signals

- Multi-standard waveform monitoring
- Y, B-Y, R-Y / GBR / YIQ / NTSC
- 3 looping inputs plus ext ref
- Self-contained sequential switcher
- Individual or simultaneous monitoring of any 3 synchronous signals
- Parade or overlay display
- Expanded overlay allows timing measurements to 5ns resolution

broadcast video systems ltd.

40 West Wilmot St., Richmond Hill, Ontario L4B 1H8
Telephone (416) 497-1020 Telex 06 964 652

Circle (108) on Reply Card

PRECISION MAGNETIC TEST TAPES



Standard Tape Laboratory, Inc.
26120 Eden Landing Road #5, Hayward, CA 94545
(415) 786-3546

Circle (100) on Reply Card

SAVE TIME

For fast, accurate service, please remove the peel off label used to address your magazine, and attach it to the Reader Service Card, the Address Change Card or to any correspondence you send us regarding your subscription.

SURVIVAL RADIO

It really *is* a jungle out there. And in that jungle, Otari's MTR-10 audio machine gives you the ammunition you need to stay alive—like three speeds, micro-processor control, a built-in cue speaker, and an optional ten-memory autolocator.



The MTR-10's "creative arsenal" helps you keep pace in the tough, competitive world of broadcast.

Whether you're doing spots, editing, or working "live", this rugged machine provides the features you'll need for the recording tasks of tomorrow. As one of our customer's put it, "Everything I even *think* I want to do, I *can* do on this machine."


Now add Otari's legendary reliability and customer support, and your chances of survival become even more certain.

Has a good business decision ever been easier to make? From Otari: The Technology You Can Trust.

Contact your nearest Otari dealer for a demonstration, or call Otari Corporation, 2 Davis Drive, Belmont, CA 94002 (415) 592-8311 Telex: 9103764890

Circle (91) on Reply Card

OTARI

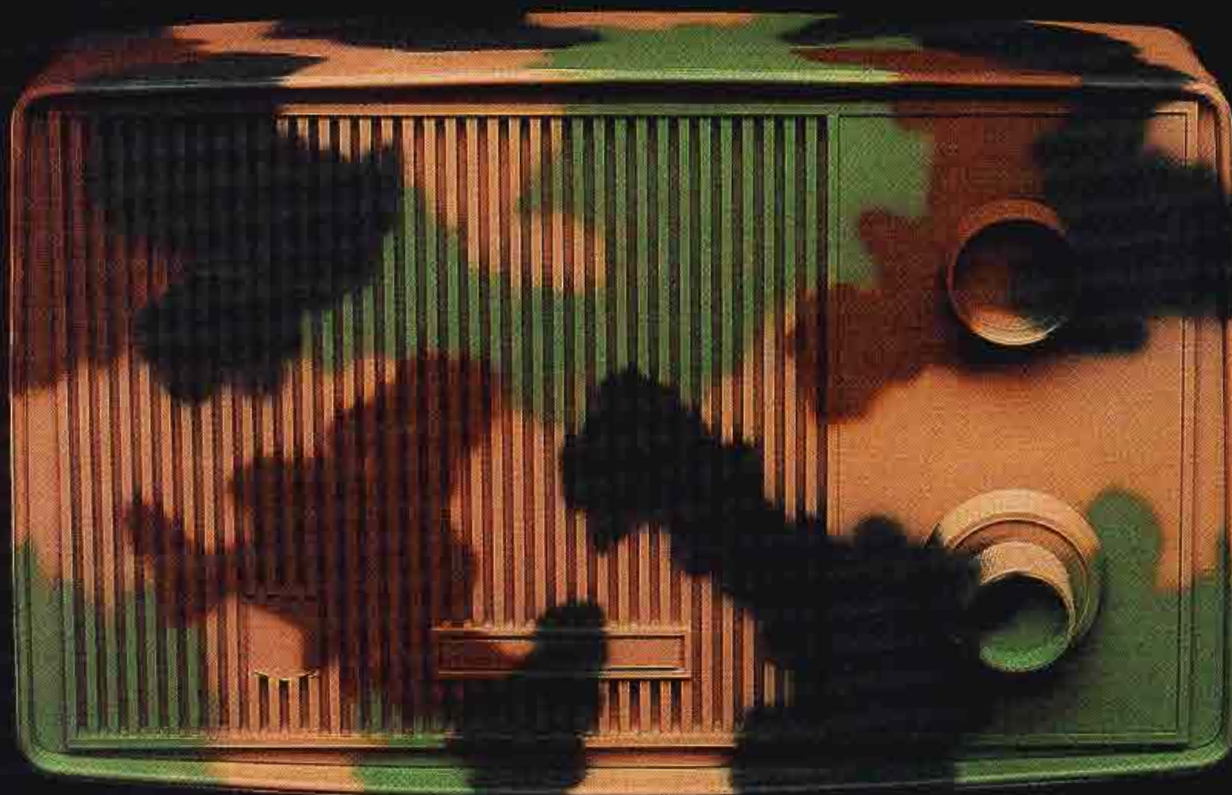

© Otari 1984

Continued from page 4

to Dollie Hamlin, program coordinator, SMPTE, 595 West Hartsdale Ave., White Plains, New York 10607, by June 15.

Frank J. Haney, Capital Cities/ABC, and Edward J. Burns, Eastman Kodak Company, have been named program chairman and program vice chairman.

DBS comes to England

By Howard T. Head

Direct Broadcast Satellite (DBS) service opened in England on Jan. 30. Known as Super-channel, the new service operates

on a Ku-band transponder on the Eutelsat (European Organization of Telecommunications by Satellite) satellite ECS-1.

In its first phase, Super-channel expects to reach most of the more than five million European homes that already have cable connections. This initial coverage will include cable systems in Holland, West Germany, Belgium, Switzerland and the United Kingdom. Programs also can be received with parabolic antennas in these countries as well as Spain, Luxembourg, France, Denmark, Ireland, Sweden and Finland.

Program variety is the great attraction of DBS transmissions in Europe. Most TV broadcasting in European countries is under tight government control, and some programs fall short of public tastes. Videotapes, both legal and pirated, are widely viewed.

The new enterprise also has attracted attention to its business structure. Financed by a consortium of public and private British TV companies, it has the backing of the British government.

Master antenna systems are legal in Spain

Videotape and film producers and distributors in Spain have reacted angrily to a decision by the Supreme Court of Spain, which held that community videos are not TV broadcasting and, therefore, not subject to government regulation. A community video is a master antenna system, but with two twists—it doesn't carry air signals, but runs movies from noon to midnight.

The great mass of TV viewers in Spain are dissatisfied with the broadcast programming; VCRs are proliferating at the rate of about 600,000 per year, and video stores and rentals are springing up like mushrooms. Any additional programs are eagerly sought, and community videos are one way of filling the gap.

Although the law provides for copyright protection for videotapes, getting it is another matter. Pirating of tapes is widespread, and there also is a shortage of legal titles. The producers and distributors want the government to step in in the hope of getting protection, but the new court ruling makes it look as if the government can act only under the guise of establishing technical standards for interference protection.


Head, BE's European correspondent, is a consulting engineer based in Madrid.

1:7=))))

NEED TO EDIT AUDIO FASTER?

We have the Solution...

With Our
**Edit Suite
Audio Mixers**

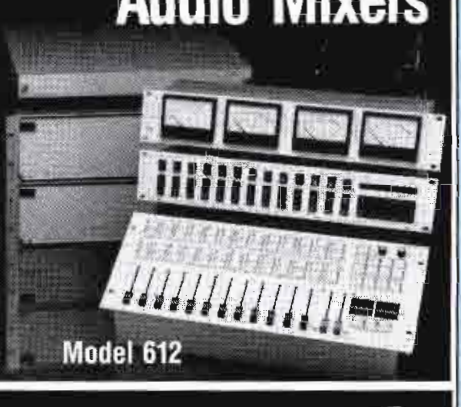Model 616

Model 612



Model 608 (New for '86)

Specially designed for television, the ESAM from Graham-Patten Systems lets you edit audio the same way you do video... operating from the edit keyboard. Only the ESAM has a proven track record in edit system integration: for Ampex ACE, CMX, Calaway, Convergence, Grass Valley Group, and other editing systems that operate a production switcher. Tailored to the needs of every facility, ESAMs are offered in 8-, 12-, and 16-input models. Additionally, an electronically controlled programmable equalizer is available for the 12- and 16-input models. Here are just a few other innovative ESAM features:

- Operates like a video switcher with preset, program & preview busses
- Manual & full edit system control of source selection, transitions, & previews
- Separate electronics & control panels for maximum flexibility & compact size
- Delivers high quality demanded by recording & post production professionals

Yet there's more! For a complete brochure, call us toll free:



GRAHAM-PATTEN SYSTEMS, INC.
P.O. Box 1960, Grass Valley, CA 95945

Inside Calif.: (800) 422-6662 • Outside Calif.: (800) 547-2489 • TWX 910-333-6065

Circle (50) on Reply Card

For five more bucks why not own the best?

NEW!



The new 8600 Aural STL System

MORE FEATURES

Designed for either single channel or dual monaural operation, our new 8600 STL system is loaded with features: a built-in subcarrier generator and demodulator for voice and data linking; spurious-free power amplifier; front panel mic input (transmitter) and headphone jacks (receiver) and built-in capability to properly match phase and gain between dual links for either AM or FM stereo applications.

MORE PERFORMANCE

From our extensive experience with STL's we have used the latest design techniques and components to create a superlative sounding system. Because the design is derived from our respected 8300 Composite STL, you can also expect the same caliber of stable performance.

MORE COMPANY

Because TET is behind the new 8600, so is a full two year limited warranty with service if you need it: 24 hours a day, 7 days a week.

For more than 10 years, this is the kind of back-up support we've provided to broadcasters who have relied on our legendary 8300 and 7700B Composite STL's.

MORE MONEY

A compact, single rack-space, single channel 8600 system is an affordable \$3,195 suggested list (1 Receiver & 1 Transmitter).

Five bucks more than the Marti STL-10.*

LESS DELIVERY

Less than 4 weeks.

Contact us or your favorite TET dealer today for full technical information. If you can't afford to call, then go ahead and save the five on our competitor's less expensive system. We understand.

TET INC

... Where New Things Are Happening!!!

3090 Oakmead Village Drive
Santa Clara, California 95051

Tel: (408) 727-7272

Telex: 910 338-0594 © 1986, TET, Inc.

Circle (40) on Reply Card

Photo shows 8600 STL System (Model 8600 Transmitter) as a single link with redundant receivers (Model 8601 x 2).

*Based on available price information 6/86

Ampex sells equipment; demos AVC series

NBC affiliate, WMAR-TV, has purchased Betacam ENG equipment to upgrade its news department, from *Ampex*, Redwood City, CA. The purchase includes: 11 CVR-105 camcorders, four CVR-25 portable recorder/players, two CVR-21 portable players, four CVR-10 studio players, three CVR-15 studio players with AST tracking, 12 CVR-40 studio recorder/players, an AVA-3 video graphics system and various accessories. The station has also ordered an Ampex PictureMaker 3-D modeling and animation system.

Ampex demonstrated its AVC Century series of high-end video broadcast and post-production switchers to editors, technical directors, facility operators and other members of the Hollywood production industry during an open house, Jan. 14, 15, 16 and 19, at the Sheraton Universal Hotel. The series provides keying, key masking and memory capabilities,

and interfaces with any editing system, enabling facilities to upgrade their switchers without replacing existing equipment.

BTS expands U.S. activities

The *BTS Broadcast Television Systems*, Salt Lake City, is expanding its graphics product range by adding the Vidifont/Viditext product line from Thomson CSF Broadcast. Product development, production, sales and field service will be handled by BTS, a subsidiary of BTS Broadcast Television Systems GmbH, Darmstadt, Federal Republic of Germany.

Tek Media Supply Company formed

RTI and Schmidt Audio Visual have formed a new company to market their film and video accessory products. *Tek Media Supply Company*, Lincolnwood, IL, offers a line of professional film and video care and storage supplies and equipment. Products include the RTI

brand film and video storage racks, film cleaning/conditioning chemicals, film splicers, splicing tapes, viewers and sound readers. Also offered are blank and custom-printed film leader, Academy leader, along with storage, shipping and carrying cases for videotape and film, audio visual carts and furniture. Tek Media also will distribute the Tuscan un-plastic reels and cans. The company is located at 4700 Chase, Lincolnwood, IL 60646; telephone 312-677-3000. For toll-free ordering call 800-323-7520.

Gannett receives Wheatstone consoles

The Gannett News Service facility in Washington, DC, is scheduled to receive A-500 on-air consoles from *Wheatstone*, Syracuse, NY. The consoles will be installed in the main news production studios. The consoles are based on the standard 28-position model and will include several options, one of which is the MXM-500 module. I:~:~)))))

Speed...

No one need be reminded of the importance of speed in today's world. New audio test requirements, now more than ever, are tuning up the demand for speed with more tests, more often and more devices to test.

The Amber 5500 Programmable Audio Measurement System offers a 3 to 10 time speed improvement over other programmable audio analyzers and perhaps 100 times that of older semi-automatic instruments. And if you really want blinding speed, our high speed plotting system captures over 500 readings per second!

The 5500 will meet the challenge of today's high-performance measurement requirements as well with distortion below 0.001%, -100dB, noise below 1uV, -120dBm and balanced generator levels above 30V, +30dBm. It measures signal level, gain, three kinds of distortion, weighted and unweighted noise, crosstalk and frequency to virtually all world standards. Balanced stereo inputs and outputs allow interface to professional, commercial and consumer devices. And if you need more measurement capability in the future, the unique Amber modular system architecture allows upward growth and system modification.

Ask for our comprehensive technical brochure.

Amber also makes one of the most popular portable high performance audio measurement systems - the 3501. Half the weight and size of comparable instruments, the 3501 has one of the best reliability records in the industry.

amber

Amber Electro Design Inc.
4810 Jean Talon West
Montreal Canada H4P 2N5
Telephone (514) 735 4105
Telex 05-827598
US Toll free 800-361 3697

Circle (88) on Reply Card

AUTOMATED BROADCASTING SYSTEMS

Four Models

SOL-6800/MICRO

For 1 VTR with 4-input AV switcher
From **\$2,500**

SOL-6800/MINI

(Fully programmable)
For 4 VTRs with 6-input AV switcher
From **\$9,000**

SOL-6800/U.I.S.

(Upgradable intelligent system)
For 8 VTRs with 12-input AV switcher
From **\$12,000**

SOL-6800


(Fully programmable/expandable)
For 8 VTRs with 12-input AV switcher
From **\$17,000**

A COMPANY DEDICATED TO AUTOMATION

SOLUTEC

H.A. Solutec Ltd.
4360 d'Iberville, Montreal
Quebec Canada H2H 2L8
Tel: (514) 522-8960 Telex: 055-62139

Circle (89) on Reply Card

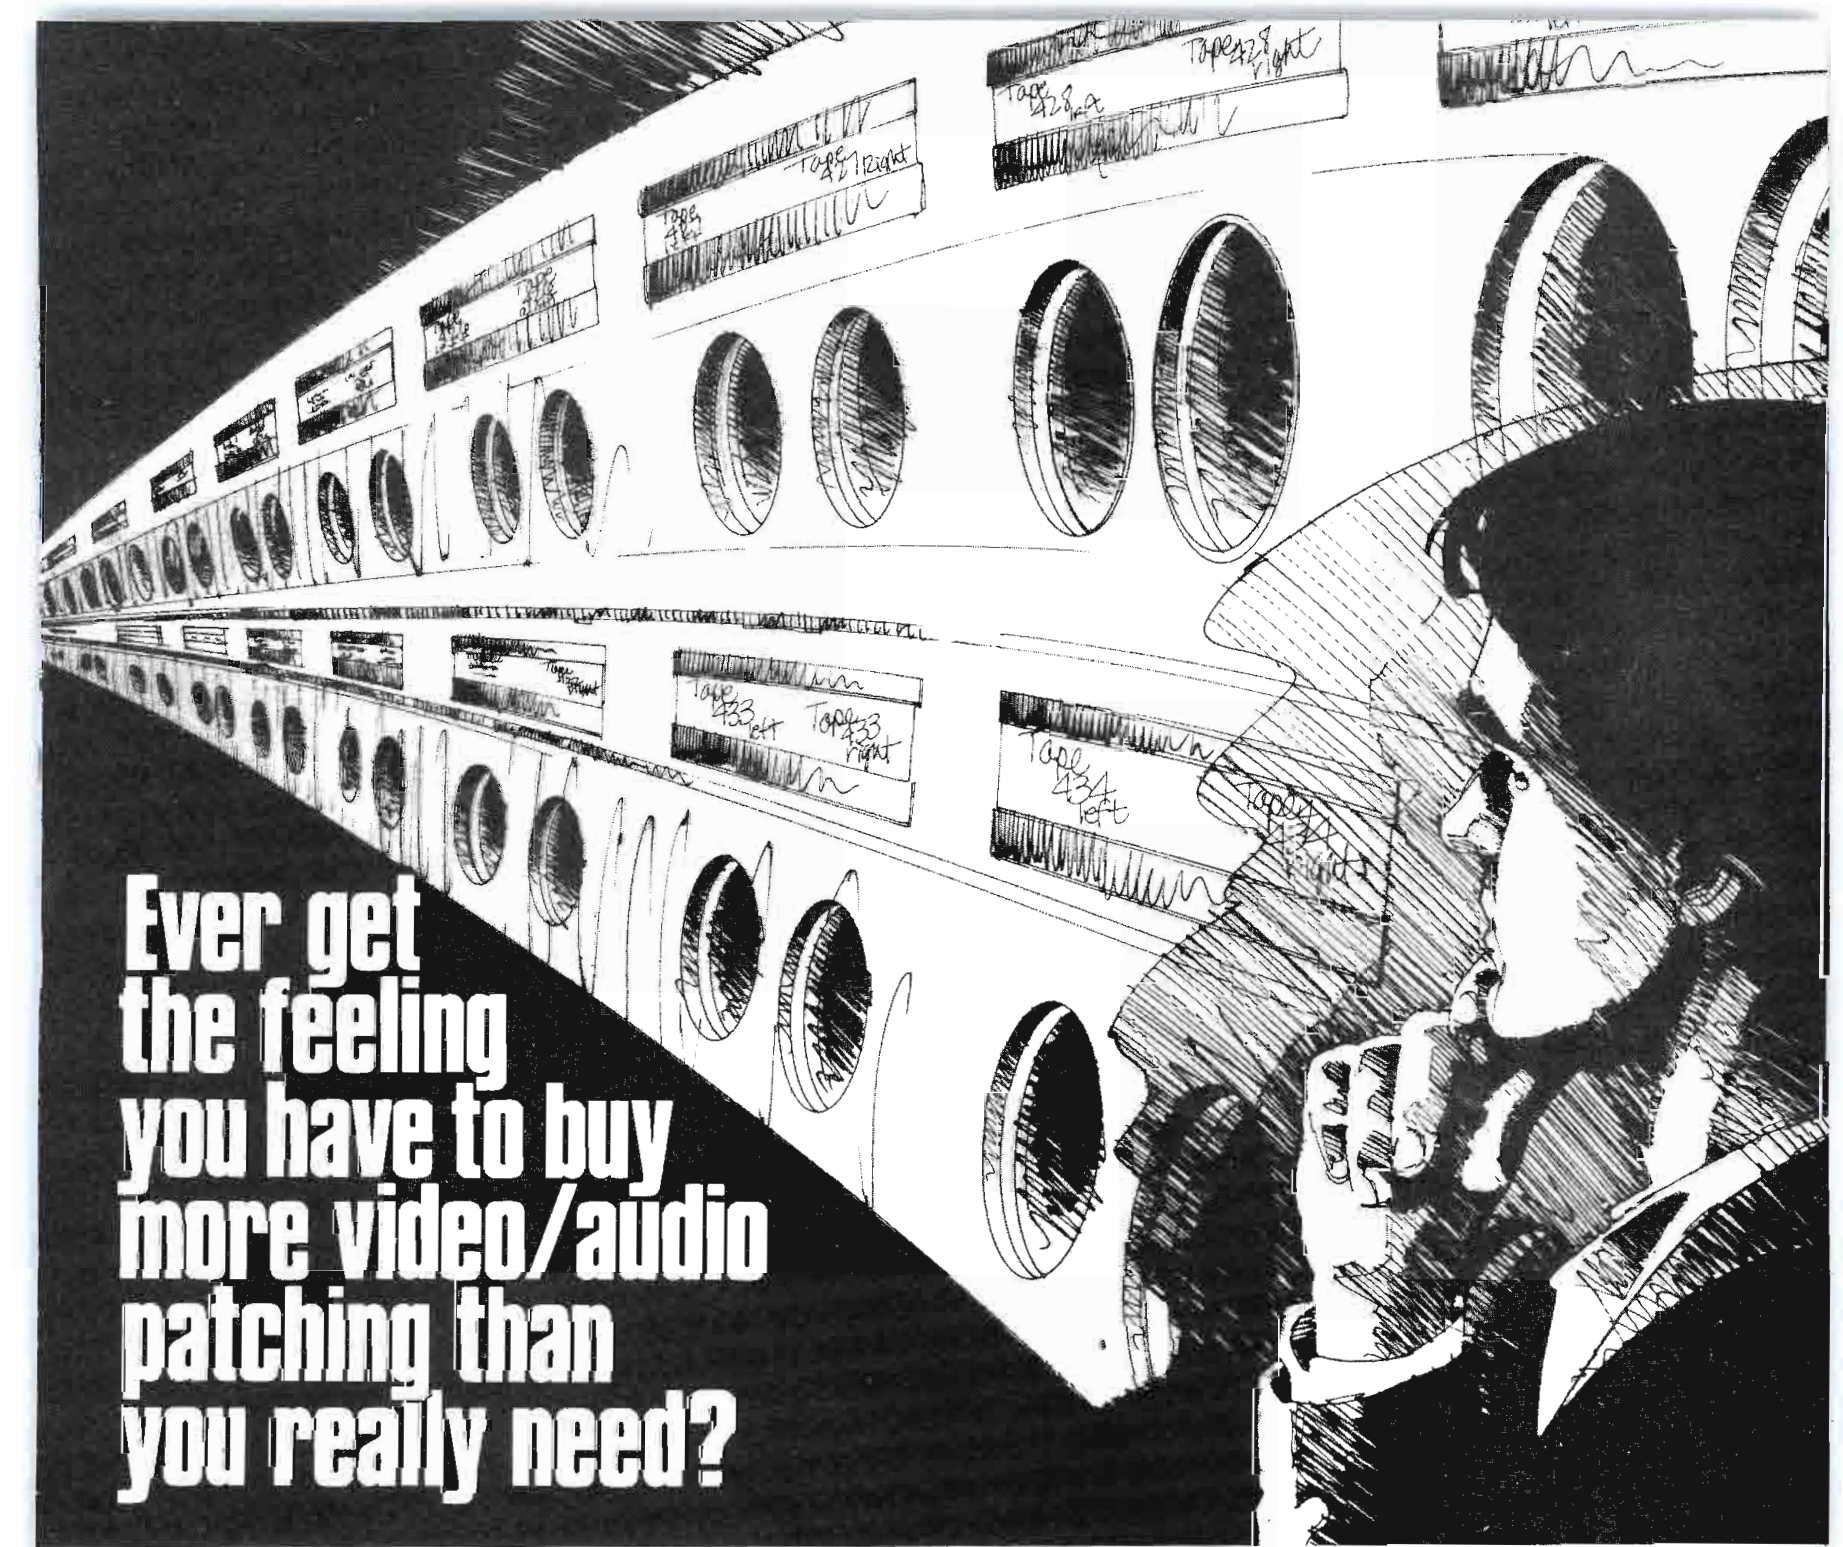

**Ever get
the feeling
you have to buy
more video/audio
patching than
you really need?**

Patchbays are a good idea, but they're not really cost-effective for small studios because they give you more jacks than you need.

But now, ADC's exclusive Video/Audio Modular Patchbay (VAMP) lets you custom-design your own bay. Our VAMP saves you money, because you can buy the exact number of video and/or audio circuits you need, and add circuits as your needs change. It saves time — to order modules, just call your local ADC distributor for fast delivery. And it saves space by letting you combine audio and video patching in a single bay.


VAMP audio modules feature ADC's exclusive QCP punchdown insulation displacement contacts for fast, durable terminations with no soldering or wire-stripping. Video modules come with ADC's SJ2000 self-normalling jacks or a pair of CJ2011 single coax jacks. Each VAMP chassis holds up to 20 modules; mix or match audio and video modules to suit your needs.

For flexible audio and video patching with no wasted space or unnecessary costs, revamp your system — with ADC's VAMP.

New SAILS makes circuit designation a breeze.

Our exclusive Self-Adhesive Identification Labeling System (SAILS) makes circuit labeling easy and efficient. Each VAMP chassis comes with a sheet of form feed, computer-printable adhesive-backed labels. The unique polyester label material won't smear or yellow, is easy to write or type on and removes cleanly without tearing.

SAILS are over 1/2" wide, providing ample room for circuit designation.

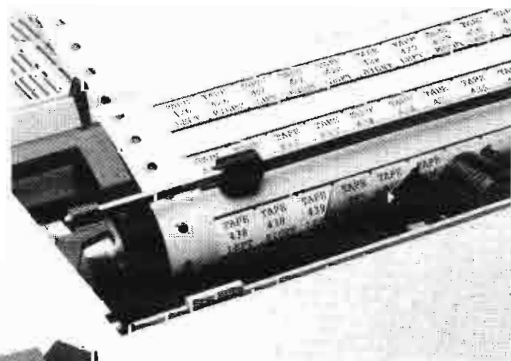

**The
Panel of
Experts**

ADC Telecommunications

4900 West 78th Street,
Minneapolis, Minnesota 55435

Call (612) 893-3010 for the name of your nearest ADC distributor.

Circle (95) on Reply Card

www.americanradiohistory.com



The Right Stuff!

Ikegami's HK-322 Studio and HK-323 Field/Studio Cameras: Here to Stay.

Ikegami's HK-323 1" and $\frac{2}{3}$ " field/studio cameras, alongside the ever popular HK-322 full production camera, gives the broadcast marketplace a choice of two distinct, yet unique cameras, second to none.

The HK-322 with 1" or 1 $\frac{1}{4}$ " tubes remains the ultimate production camera in the industry, with specialized functions not found on any other camera. These include 6 vector color corrector, scan reversal with memory, negative video, out-of-bands horizontal aperture correction, scene files with extensive memories, dream effect and much more. For complete flexibility, the hand-held HL-79EP is available as the companion camera.

For field/studio operation, the HK-323 1" and $\frac{2}{3}$ " cameras, recently introduced by Ikegami, are quickly gaining acceptance with the networks as the market leaders in this segment of fully automatic micro-processor controlled, lighter weight broadcast cameras. The HK-323 is available with the optional hand-held companion, the HK-323P, which operates off the same base station.

Once again Ikegami is right where the marketplace expects us to be; with a commitment to excellence and our assurance of the best.

For a demonstration of the Ikegami HK-323 and HK-322, contact us or your local Ikegami dealer.


Ikegami

Ikegami Electronics (USA), Inc. 37 Brook Avenue Maywood, NJ 07607

East Coast: (201) 368-9171; West Coast: (213) 534-0050; Southeast: (813) 884-2046 Southwest: (214) 233-2844;
Midwest: (312) 834-9774; Hawaii: (808) 946-5955



HK-322 hand-held companion HL-79E

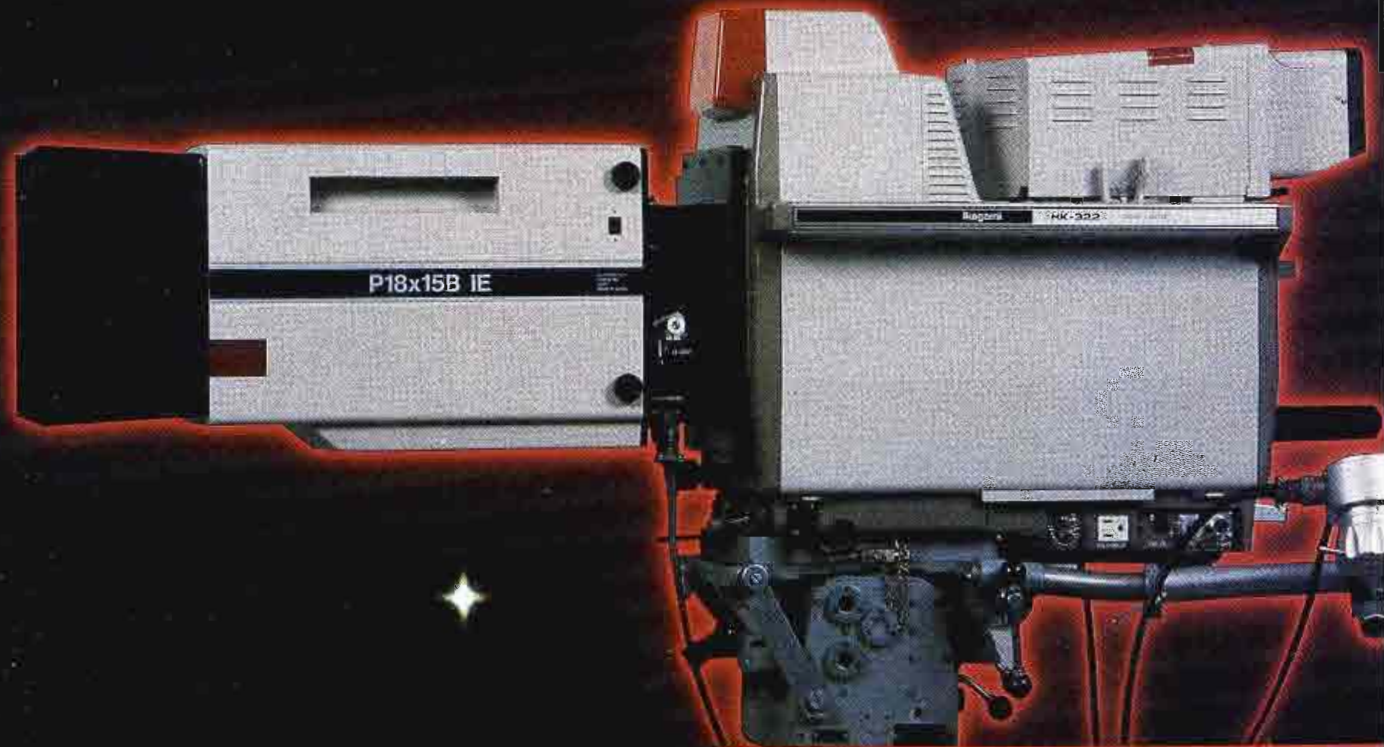

HK-323 hand-held companion HK-323P




Circle (96) on Reply Card

Automation system, interface devices

Allied Broadcast Equipment has announced the following products:

- The Over-Nite automation system uses two Audiometrics multi-CD players with two SMC carousels and a system controller to allow unattended operation for overnight programming. Also provided are 48 random-access tape cartridge tray locations and two single-play tape cart players. The system is CRT-based and includes a stereo monitor amp with provisions for an external off-air signal, a silence sense alarm, VU test meters, fiber-optic connection between CPU and keyboard, dual CRT driver, real time clock, printer driver and equipment rack.
- Four relay interface devices that include the model 115 and 116. The model 115 contains one relay and can be ordered with 2, 4 or 6 form C contacts. The model 116 has four separate relays each with two form C contact arrangements. The relay contacts are rated at 2A with a supply voltage required of 24Vdc that can usually be from the remote-control system, the transmitter or a small separate supply. Wire attachments are by isolated screw terminals that require no crimp lugs and no soldering.

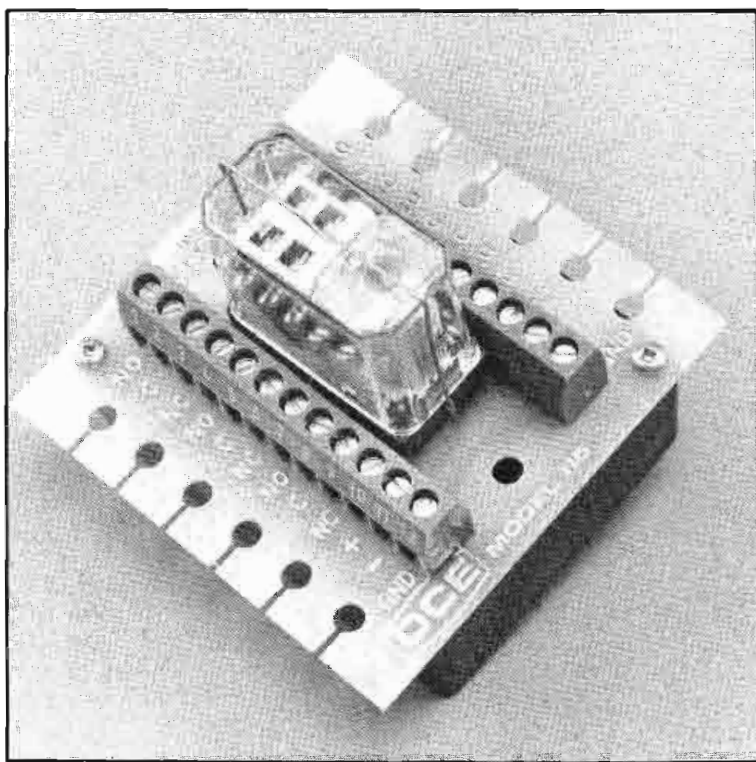

Relay interface device

Circle (350) on Reply Card


Satellite video receiver and grounding strap kit

Andrew has announced the following products:

- The ASR300 dual-band satellite video receiver. It operates in both C- and Ku-bands, and provides video performance that meets the EIA RS-250B standard. The receiver has dual RF inputs, frequency-agile RF tuning in 1MHz steps and two selectable IF filters with independent output level adjustment. Additional features include a frequency-agile audio subcarrier demodulator, two fixed-tuned audio subcarrier demodulators and a clamped composite output with clamp defeat. Alarm and control capability is provided in the receiver and includes loss of carrier, loss of video and power supply fault. The

receiver may be controlled via a serial RS-422 or TTL compatible interface.

- A solid copper, preassembled grounding strap kit for use with Helix coaxial cable and elliptical waveguide. It is corrosion resistant and is shipped fully assembled. It includes a strap tool for tightening a 2-part tape system and stainless steel hardware for mounting the grounding cable to the down conductor.

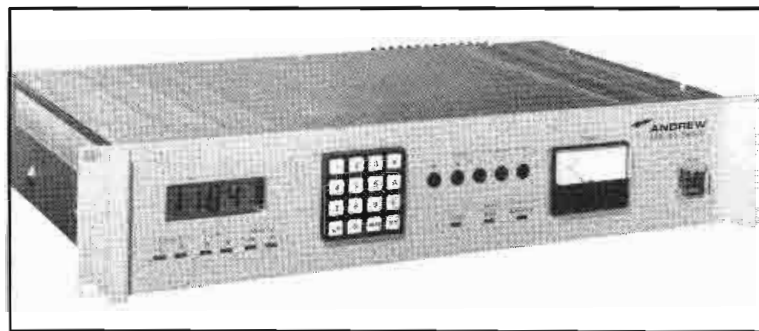

ASR300 dual-band video receiver


Circle (351) on Reply Card

Character generator with added features

Aston has introduced three features for its A-4 character generator. They are the LogoMaster graphic/logo compose facility; Shades, an additional plane with comprehensive shaded background capabilities and the Hard Disk facility. LogoMaster allows creation of displays ranging from multi-colored logos, symbols or special characters at sizes of 10 TV lines upward to full screen graphics. It is controlled from the keyboard and can be fed from any video input. The Hard Disk capability allows for an integral 25Mb disk, with a capacity equal to 16 floppy disks.

Circle (352) on Reply Card

Audio test system

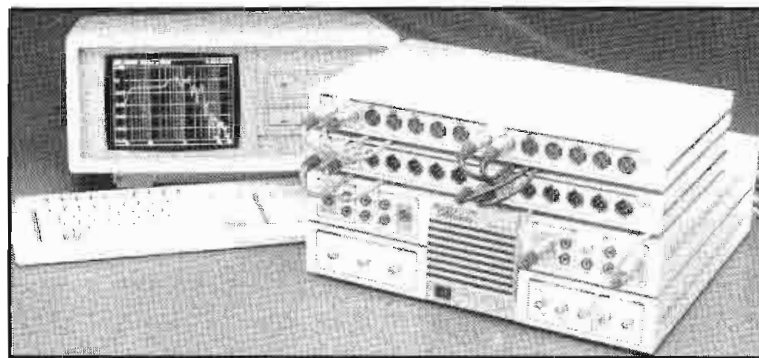

Audio Precision has introduced the A version of its System One audio test system. It makes simultaneous amplitude measurements on two channels, permitting stereo response measurements at twice the speed. Both channels can be displayed simultaneously as analog bar graphs or decibel difference between the channels can be displayed for balance adjustments. Crosstalk and stereo separation can be displayed as the amplitude difference between the two channels.

Circle (353) on Reply Card

Transport cases

Andiamo has introduced the line of Aerospace transport cases. They can be used to transport video gear, sensitive

electronic instruments, optical and mechanical devices and computer disks. All cases come with a lifetime warranty. The cases' exteriors are made of impact-resistant engineering plastic. Custom, dust-repellent foam interiors safeguard against damage to any equipment that's shipped or carried. The cases also are chemical- and scratch-resistant and feature a tongue and groove seal that makes them airtight and watertight. An interlocking mechanism enables the traveler to connect dissimilar-sized cases. The cases can be carted on two wheels, dollied on four or stacked horizontally.

Circle (354) on Reply Card

Microphone windshields

Audio Services Corporation has introduced several windshields for stereo microphones. One series looks like the conventional windshield, but has larger diameters for larger stereo microphones. The Rycote Ball Gag houses two remote capsules in either M-S or X-Y stereo configurations. Windjammers are available for all stereo windshields.

Circle (355) on Reply Card


Teleprompter program

Beacon Software has introduced the AUTOPROMPTER+, a microcomputer-based teleprompter program for the Apple II series computers and compatibles. It is a full-featured, menu-

driven program that supports video or paper-based portable or camera-mounted prompter systems and offers a range of features for text entry and electronic teleprompting. The program features smooth scrolling text; adjustable scrolling rate; on-line help screens; 1,350-line text display; program for minimum of 128k computers; built-in word processor; and story list management.

Circle (356) on Reply Card

Cart machine

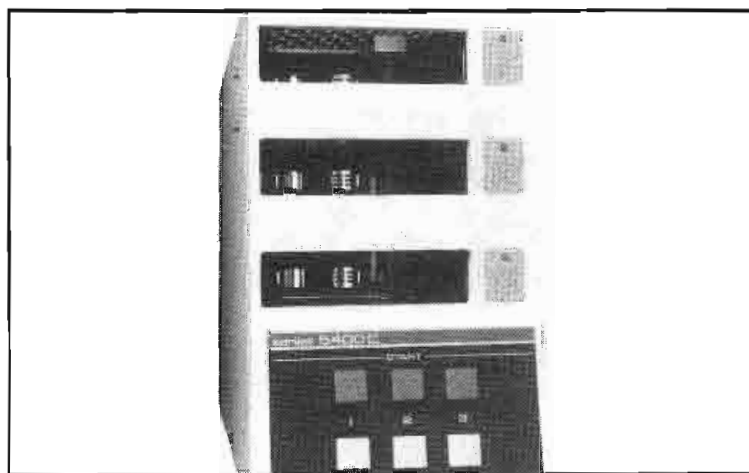


CORNELL-DUBILIER

Mica Capacitors

LARGE



STOCK



VACUUM CAPACITORS

JENNINGS


SURCOM ASSOCIATES, INC.

305 Wisconsin Avenue
Oceanside, California 92054
(619) 722-6162

Circle (109) on Reply Card

■ 150 MHz

■ 5 Channels

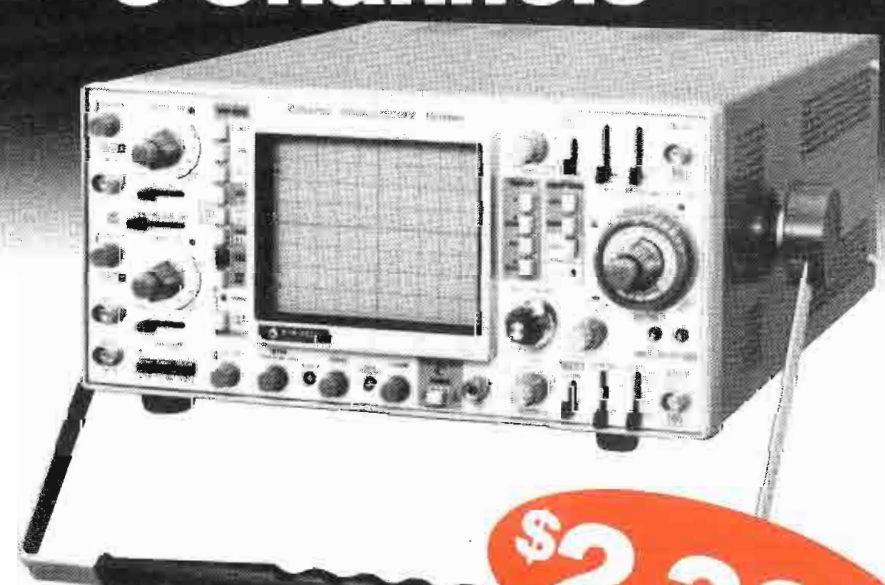

\$2,365

- P-P Auto Trigger
- Separate EXT A & B Triggers
- TV Sync

(800) 545-8784



#3 in scope sales

19601 Mariner Ave., Torrance, CA 90503
(213) 371-4662 in CA and AK

Circle (94) on Reply Card

Broadcast Electronics has introduced the model 5400C 3-deck cart machine. The Phase Lok V head assembly is a key feature of the machine. It uses a locking azimuth control that is independent of the height or zenith adjustments. Also included is a cartridge guidance system that provides positive positioning for all accepted cartridges. Features of the cart machine include the air-damped solenoid in each deck assembly and a torodial transformer in the primary power supply. A non-repeat function flashes the stop indicator to let the operator know that the cartridge has played through completely or has stopped before recuing.

Circle (357) on Reply Card

Tower strobe models

Broadcast Communications has introduced the following products:


- The model SB-2001 Brighter Idea strobe beacon is designed for tower applications where a 20,000 candela strobe is used for daytime lighting and red flashing incandescent lights are used for night. The beacon is housed in the upper half of a 300mm code beacon. The bottom glass fresnel lenses are red and house the two 620W incandescent lamps. An internal photocell senses the external light level and changes from daytime strobe to night red flashing lamps.
- The model SH-2001 is a self-contained strobe housed in a

glass fresnel lens system. The base, hinges and top are all cast aluminum and mount in place of an incandescent beacon using the same mounting holes. The beacon operates from 120V, 60Hz power using 2-wire No. 12 or larger.


- The alarm model AL-1001 provides an audible alarm and NO/NC contacts for remote-alarm alert to the studio. It mounts in a standard 19-inch rack panel. The panel contains an audible alarm as well as normally open/normally closed dry contacts to send an alarm to a remote-control point.

Circle (358) on Reply Card

Solder pots, contact preservatives

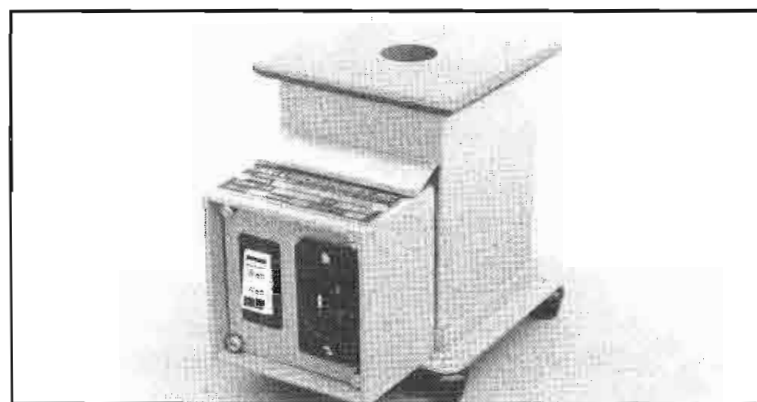

We've taken apart half a million videocassettes and saved our customers 2 million dollars



Before we'll reload a 3/4" u-matic videocassette we take it completely apart and rebuild it inside and out. We replace wiper flaps, friction pads, tape guides and leader — everything that's needed to make the cassette test as good as new. Only then will we reload it with new 3 M videotapes or other major brands. If we can't rebuild it we won't reload it.

Coarc also loads new cassettes with broadcast quality videotape for Betacart and 3/4" cart systems.

CoarcVideo™

Custom Loaded Videocassettes (518) 672-7202

P.O. Box 2, Route 217, Mellenville, New York 12544

3/4" RELOADING □ PROFESSIONAL VHS & BETA □ 1/2" AND 3/4" CART CASSETTES

Circle (97) on Reply Card

Want More information on advertised products?

Just refer to the reader service # beneath each ad. Circle the appropriate number on the Reader Service Card in the back of this issue. Complete the remaining information and mail!

BROADCAST engineering

P.O. Box 12901, Overland Park, KS 66212
U.S.A.

FREE 32pg Catalog & 50 Audio/Video Applic.

OPAMP LABS INC (213) 934-3566
1033 N Sycamore Av LOS ANGELES CA, 90038

8-in/2-out, 12-in/4-out, 16-in/4-out
TV Audio & Recd Prod Consoles

Video & Audio Dist Amps.

Stereo/Mono Pwr Ampl.

PWR SUPP. EQ.
PHONO, MIC,
TRANS. ACN,
TAPE, VIDEO,
LINE, OSC

Circle (98) on Reply Card

SESCOM, INC.
"the audio source"

FOR ALL OF YOUR AUDIO NEEDS
2100 Ward Drive Henderson, NV 89015 U.S.A.

CALL TO RECEIVE A COPY OF
OUR POCKET-SIZED CATALOG

CATALOGS & ORDERS: (800)634-3457
OTHER BUSINESS: (702)565-3400
TWX(910)397-6996

Circle (99) on Reply Card



\$15,500
WITH ANTI-ALIASING

The only Character Generator that can display these kinds of figures.

Dubner's 10-K includes 4 anti-aliased typefaces and 30 standard fonts for \$15,500. Designed to meet the demanding requirements of broadcast, teleproduction, corporate and industrial video users, the system also features: 16 million colors; embossed and 3-D edges; full screen help menus; playback effects: tumble, fade, wipes and pushes;

sequencer; built-in sync generator/encoder/keyer; 5 1/4" floppy disk.

For a little more, the 20-K offers all of the 10-K features with a 10 megabyte disk and direct compatibility with our CBG, Texta and DPS-1 Painter System.

For more information, call your authorized dealer.



DUBNER

DUBNER COMPUTER SYSTEMS, 6 Forest Avenue, Paramus, NJ 07652 USA (201) 845-8900 TWX 133-184 OFFICES: District of Columbia (301) 622-6313; Atlanta (404) 493-1253; Chicago (219) 264-0931; Minneapolis (612) 483-2594; Dallas/Fort Worth (817) 921-9411; Los Angeles (818) 999-2303; San Francisco (415) 968-6680. A Grass Valley Group Company

Circle (101) on Reply Card

www.americanradiohistory.com

You'll meet your match with our EDITING CONSOLES

No matter what VTR equipment you use, Winsted offers Editing Consoles to **match your requirements!** Our designs are based on consultations with professional users like yourself.

You've chosen your VTR equipment carefully, to meet your specific needs. Now choose the Editing Consoles that fit your equipment - quality consoles from Winsted.

For our free full-color FULL-LINE CATALOG call us toll free:

800-447-2257
TELEX: 510-601-0887

Winsted

9801 James Circle
Minneapolis, MN 55431



Circle (102) on Reply Card



SONEX kills background noise beautifully.

Tom Hannaford, Dixieland Productions, Atlanta, GA

SONEX is a special acoustic foam that absorbs noise four times better than acoustic tile or carpeting. It makes you sound like a pro — inexpensively — because your voice comes across clear, clean, and intelligible. Use SONEX for video, remote conferencing, voice-overs, radio communications, audio production, or anywhere else you need to sound crystal clear. Kill background noise beautifully — and save the true sound — with SONEX. Send for all the facts.

Alpha Audio

SONEX is manufactured by Illbruck and distributed exclusively to the pro sound market by Alpha Audio.

2049 West Broad Street · Richmond, Virginia 23220 · (804) 358-3852
Acoustic Products for the Audio Industry

Circle (103) on Reply Card

Caig Laboratories has introduced the following products:

- Cramolin products are anti-oxidizing solutions that clean, preserve and lubricate all metal surfaces including gold. When the preservative is applied to metal contacts and connectors, it removes resistive oxides and also forms a protective molecular layer that adheres to the metal surfaces and maintains electrical conductivity. It can be used on switches, potentiometers, relays, connectors, batteries, faders, inter-connecting cables, gold-edge connectors, plugs and jacks.
- Solder pots are manufactured in round or rectangular, shallow or deep, low or high watt densities and cast-iron steel or stainless steel materials. Most sizes also are available with full heat operation, thermostat controls or accurate SCR time proportional controls.

Circle (359) on Reply Card

Audio automation

BC Engineering has introduced the AC 400. It features four channels with two controls: one to set the rate of change and the other to set the amount of gain reduction. The four channels may be used separately or coupled for stereo. Additional features include variable rate fades; variable gain reduction; versatile interface; balanced inputs/outputs; stereo coupling switches; and crossfade capabilities.


Circle (360) on Reply Card

Jackfield cleaner

Canford Audio has introduced two products to clean jackfields. The Canford jackfield burnisher is machined from tool steel, treated to create a fire-burnishing surface and then chrome-plated. To clean contacts, insert the burnisher, twist lightly and remove. There is no need to dismantle equipment. The jackfield solvent injector cleans switch contacts. It has a channel drilled lengthwise through the tool with an additional perpendicular channel at the top. Insert the tool into the jack, the switch contacts are opened, and by inserting the plastic tube of a solvent aerosol into the back of the tool, the cleaning fluid can be injected directly onto the contacts. When the tool is removed, the movement of the switch contacts completes the cleaning process.

Circle (361) on Reply Card

Softlights

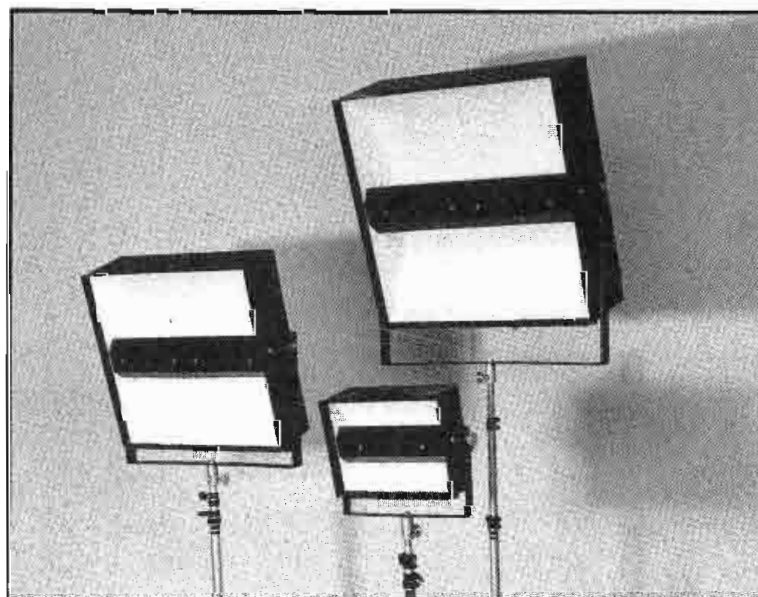


Comprehensive Video Supply has introduced a family of SOFTOUCH softlights. They provide a flexible, indirect light source. The fixtures are softlights that reflect the direct rays of a lamp off a reflective surface. The chip-resistant, non-yellowing white paint on the reflector reproduces the Kelvin color temperature of any bulb used. The light's center lamp support swivels around for easy relamping. The lights are available in five sizes and two kit configurations.

Circle (362) on Reply Card

Broadcast encoder

Crosspoint Latch has introduced the model 6051 broadcast quality encoder. It accepts RGB signals from graphics and character generators and converts them to encoded signals that can be inserted into video switchers or displays them on projection TV systems. The encoder gen-locks to any color signal or blackburst. It does not require any external drives. It has front-panel horizontal and subcarrier adjustments.

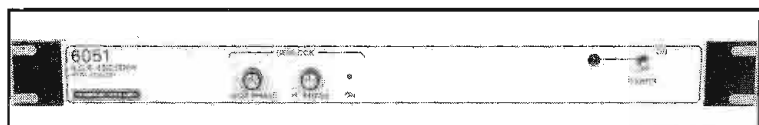


Circle (363) on Reply Card

Memory controller and control board

Electronics Diversified has introduced the following:

- The Litestar II memory controller allows up to 1,000 dimmers to be controlled by 120 control channels. Features include 100 memories, 10 inhibiting submasters, two electronic crossfaders and a manual crossfader. Output is USITT standard serial digital, with analog backup. Shows may be linked to disk drive and color video monitor.
- The Troubadour Plus can control up to 1,000 dimmers with 96 control channels. Up to 100 cues may be stored. Features include 1,000 dimmer proportional patch, 10 inhibiting submasters, X and Y crossfaders, independent master with timers, full 2/4-scene manual mode and an RGB color monitor. Output is USITT standard serial digital, with 1-channel analog backup. Information is protected by a 10-year lithium battery.

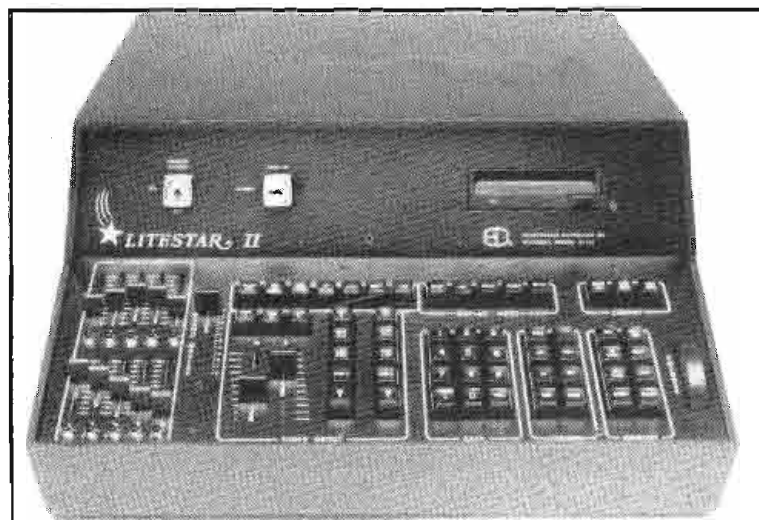


Circle (364) on Reply Card

Perfect Timing

CLOCKS AND TIMERS

FROM \$174



TO \$495




(213) 322-2136
142 Sierra Street, El Segundo, CA 90245

Circle (104) on Reply Card

Prevention is the only protection

Communications systems—
microwaves—two-way radio
—TV—FM—Nurad antennas
—boats—police and fire
stations—ambulances—
telephones—trucks—
It's round-the-clock
protection against lightning.

Lightning Deterrent Corp.
5321 South Kedzie Avenue
Chicago, Illinois 60632
(312) 434-7912 or
1-800-241-2360 ext. 532

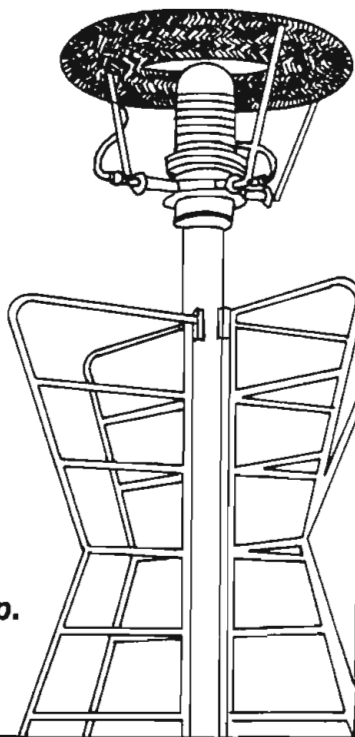

MTS stereo TV multiplexer and modulator

Circle (365) on Reply Card

Hipotronics has announced the Peschel automatic voltage regulator. The regulator uses the patented Peschel variable transformer and is available in medium to high power. Input voltage is available from 240V to 13.8kV in ranges of +9% to -14% or $\pm 20\%$. Output capacity is available from 40A to 2,000A.

1: 2000

One look at the curves of Orban's 622B Parametric Equalizer shows you its unusual flexibility. But they only hint at the 622B's satisfying musicality that pleases thousands of users all over the world. Features include:



- Orban Associates Inc.** 645 Bryant St.,
San Francisco, CA 94107 (415) 957-1067 Telex: 17-1480

www.americanradiohistory.com

Professional services

VIR JAMES P.C.
CONSULTING ENGINEERS
Applications and Field Engineering
Computerized Frequency Surveys
3137 W. Kentucky Ave. — 80219
(303) 937-1900
DENVER, COLORADO
Member AFCCE & NAB

**STEIGER, HURRAY &
ASSOCIATES INC.**
CONSULTING ENGINEER SERVICES
6816 Westview Drive
Cleveland, OH 44141
(216) 526-7187

EVANS ASSOCIATES
CONSULTING TELECOMMUNICATIONS ENGINEERS
AM-FM-TV-CATV-ITFS-LPTV SATELLITE
216 N. Green Bay Road
Thiensville, Wisconsin 53092
Phone: (414) 242-6000 Member AFCCE

FCC ON-LINE DATABASE
dataworld®
Allocation/Terrain Studies
AM • FM • TV • LPTV • ITFS
P.O. Box 30730
Bethesda, MD 20814
(301) 652-8822 1-800-368-5754

D. L. MARKLEY
& Associates, Inc.
CONSULTING ENGINEERS
2401 West Moss Ave.
Peoria, Illinois 61604
(309) 673-7511
Member AFCCE

CHIPS DAVIS
LEDE DESIGNS, INC.
**Acoustics for Stereo
Facility Design
Consultation**
(415) 459-2888

TEKNIMAX
TELECOMMUNICATIONS

DENNIS R. CIAPURA
PRESIDENT

11385 FORESTVIEW LN.
SAN DIEGO, CA 92131 (619) 695-2429

SMITH and POWSTENKO
Broadcasting and Telecommunications
Consultants
2033 M Street N.W., Suite 600
Washington, D. C. 20036
(202) 293-7742

BLAIR BENSON
Engineering Consultant
TV Systems Design and Operation
23 Park Lane
Norwalk, CT 06854
203-838-9049

LAWRENCE L. MORTON
ASSOCIATES
21671 SUPERIOR LANE
LAKE FOREST, CALIFORNIA 92630
LAWRENCE L. MORTON, E.E.
AM • FM • TV
APPLICATIONS • FIELD ENGINEERING
ANTENNA BROADBANDING FOR AM STEREO
(714) 859-6015

JOHN H. BATTISON PE.
CONSULTING BROADCAST ENGINEER,
FCC APPLICATIONS AM, FM, TV, LPTV
Antenna Design, Proofs, Fieldwork
890 Clubview Blvd. North
Columbus, Ohio 43085
614/888-3364

Robert J. Nissen
THE NISSEN GROUP, INC.
Communications Technology Consultants
32 Ridge Drive • Port Washington, New York 11050
(516) 944-5477

**BROADCASTING CONSULTANTS
AND ENGINEERS**
• FCC Applications and Field Engineering
• Frequency Searches and Coordination
• Tower Erection and Maintenance
• Facility Design and Construction
Contact:
KENNETH W. HOEHN
23400 Michigan Avenue
Dearborn, MI 48124
Teletech, Inc.
Communications Engineering Specialists
(313) 562-6873

SELLMEYER & KRAMER, INC.
CONSULTING ENGINEERS
Steve Kramer, P.E. (214) 548-8244
Jack Sellmeyer, P.E. (214) 542-2056
AM FM TV MDS ITFS LPTV CATV
APPLICATIONS • FIELD ENGINEERING
P.O. Box 841 McKinney, TX 75069

ERIC NEIL ANGEVINE, P.E.
consultant in acoustics
specializing in broadcast studio acoustics
910 Lakeridge Drive Stillwater, OK 74075
405-624-6043 405-372-3949

ATT: CHIEF ENGINEERS
broadcast video maintenance
LUNAR VIDEO LTD.
FAST TURNAROUND ON ENG, EFP, EDIT
SYSTEMS, MONITORS, TEST EQUIP, SONY, JVC,
PANASONIC, TEKTRONIX — UPS & AIR FREIGHT,
PUIDEL DAILY.
CALL
COLLECT
138 E. 26th St, NYC (212) 686-4802

Consultation Services
Lightning • Power Conditioning • Grounding
Over 40 years experience, work guaranteed

Roy Carpenter
President
Lightning Eliminators and Consultants
13007 Lakeland Rd., Santa Fe Springs, CA 90670
(213) 946-6886 TWX 910-586-1381

PATCHPRINTS Video Tie Lines
In 1 2 Aux 1 2 Mon A B
Custom Patch Bay Labeling for the Audio/Video Industries
By
PATCH BAY DESIGNATION COMPANY
Div. of Glendale Rubber Stamp & Printing Co., Inc.
CHARLIE SCHUFER
P.O. Box 6278, Glendale, CA 91205
4742 San Fernando Road
Glendale, CA 91204 Telephone (818) 241-5585

ENG SERVICE Bill Nelson
V T R Chief Engineer
Associates, Inc.
Prompt TURNAROUND on
3/4" editors, color ENG cameras.
3023 Holiday Drive, S.W. Phone
Huntsville, AL 35805 (205) 533-0571

**UNUSED
CALL LETTERS**
CALL
dataworld®
1-800-368-5754

HOW SAFE IS YOUR TOWER?
Alpha Tower Design, Inc.
901 Watertall Way, Richardson, Texas 75080
214-783-2578
STRUCTURAL ENGINEERS SPECIALIZING IN TOWER DESIGN
REGISTERED TO PRACTICE IN 49 STATES... THREE DIMEN-
SIONAL COMPUTER ANALYSIS WITH LATEST DESIGN TECH-
NOLOGY... INSPECTION & REVIEW TOWER MODIFICATIONS

R.J. GRANDMAISON, P.E.
CONSULTING ENGINEER
Applications and Rulemakings
11213 Split Rail Lane
Fairfax Station, VA 22039
(703) 764-0513
Member AFCCE

**MAILING LABELS FROM
YOUR COMPUTER!**
We supply: AM/FM/TV broadcasters on
computer diskettes
Mailing labels
Full direct-mail service.
STATIONBASE
Box 24092, Tempe, AZ 85282
(602) 437-3461

E M S
803-736-0540
Eureka Media Service
PAUL J. MASTORAKIS, CONSULTANT
TV — Systems Design — Installation — Repairs
Freelance Engineer
104 Charmont Drive, Columbia, SC 29223

Classified

Advertising rates in Classified Section are \$1.50 per word, each insertion, and must be accompanied by payment to insure publication.

Each initial or abbreviation counts a full word. Minimum classified charge, \$35.00.

For ads on which replies are sent to us for forwarding (blind ads), there is an additional charge of \$35.00 per insertion, to cover department number, processing of replies, and mailing costs.

Classified columns are not open to advertising of any products regularly produced by manufacturers unless used and no longer owned by the manufacturer or distributor.

TRAINING

ELECTRONICS DEGREE by correspondence. Earn Associate, then Bachelor's. NHSC accredited. Free catalog. Write Grantham College of Engineering, Dept. EE-5, 10570 Humbolt St., Los Alamitos, CA 90720. 8-82-tfn

FCC GENERAL RADIOTELEPHONE operators license through cassette recorded lessons at home plus one week seminar in Boston, Washington, Detroit or Philadelphia. Our twentieth year teaching FCC license courses. Bob Johnson Radio License Preparation, 1201 Ninth, Manhattan Beach, Calif. 90266, Telephone (213) 379-4461. 8-81-tfn

SERVICES

ONE STOP FOR ALL YOUR PROFESSIONAL AUDIO REQUIREMENTS. Bottom line oriented. F.T.C. Brewer Company, P.O. Box 8057, Pensacola, Florida 32506. 7-71-tf

3-D TELEVISION,—true stereographic NEW! LeaVision tm over/under (not red/blue). Viewers, consulting, lens rental. Info-SASE. DEMO (VHS/BETA)®photo® viewers-\$29.95 * \$2 S&H. TVLI-BE, CS3030 Lindenhurst, NY 11757 (516) 957-4393 (212) 245-6119. 9-86-tfn

TRANSMITTER TUBE REBUILDING SINCE 1941: 3CX2500, 4CX5000, 4CX15000 and many others. Write for details. FREELAND PRODUCTS CO., Rt. 7, Box 628, Covington, LA 70433. (504) 893-1243 or (800) 624-7626. 6-79-tfn

VITAL SWITCHERS: Buying one used? Need one refurbished? Adjusted? Call an expert, call Charles Kunz, (305) 556-9638 (work) or (305) 362-3308 (evenings). 3-87-2t

FOR SALE

RCA COLOR TELECINE SYSTEM, New/unused. To include: TK-66, color camera, TP-66, 16mm telecine projector, TP-7, 35mm slide projector, TP-55B, camera multiplexer. Write to: P.O. Box 23555-273, San Diego, CA 92123. 1-86-tfn

SONY BETACAM BVV-1A RECORDER & BVW20 FIELDPLAYER. Recorder has custom carrybag and audio and timecode mods. Both units in excellent cond. \$4750 ea. Call: 415-383-5994. 2-87-3t

COPPER! For all your broadcast needs. #10 ground radials; 2, 4, 5, 8" strap, flyscreen, counter poise mesh. 317-962-8596. Ask for copper sales. 2-87-6t

32' MOBILE VAN, 4 cameras. 2-1" VTRs, digital effects, CG, currently doing regional network basketball & football. Call 317/849-3202. 2-87-3t

ADM 2400 stereo/multichannel television audio production board. Twelve of 24 inputs populated, some Eq'd. New modules available current production. Talkback/foldback/echo send, control/studio/studio/director monitoring modules. Redundant PS, internal patch bay, new 1978. Used price less than half new today. Dave Solinske, WSYR, Syracuse. 315-472-9797. 3-87-2t

FOR SALE (CONT.)

EQUIPMENT FOR SALE: 85 Sony ¾" VCR's—Consisting of: 51 BVU200, 5 BVU100, 8 BVU50, 19 VO2860A, 3 VO2600; 6 Ikegami HL77 cameras and 6 RCA TK76 cameras; 25 miscellaneous color monitors, 4 CVS520 TBC, 1 Associated environmental chamber, 777 pieces of miscellaneous Kliegl, Colortran and Century studio lighting equipment. For further information contact Rick Melamed ABC-TV (212) 887-4981. 4-87-1t

TEKTRONIX 7623 storage scopes and or several 7A11, 7A14, 7A16A, 7B53A, 7CT1N, 7D13, 7D14, 7D15 plug-ins, calibrated, accessories, books, and warranted. 313-661-0445. 4-87-1t

SAVE BIG BUCKS during our CLOSE-OUT SALE! Digital-Effects Systems, Broadcast-Cameras, Editing-Systems, Tektronix-Test-Equipment, Sync. and Character-Generators, SEG's, Monitors, Tripods, 19" Racks and Cases and much more. Ask for our Special-Sales List. Inter-Cine-Video Corp. 312-872-1665. 4-87-1t

RCA TT-5EH AND TT-25BH TV TRANSMITTERS, Complete or parts \$20,000. For more information call or write Dan Jordan, P.O. Box 6349, Evansville, IN 47712 (812) 963-6882. 4-87-1t

TEKTRONIX RM529 WFM; Cohu synchgenerator with Modern Video Company colorizer; Panasonic WM-series broadcast microphones: 1323, 1326, 1505, 1520, 1521, 1555, 1600; UAP 5x5 audio D.A. with vu metering. SoundDesign, P.O. Box 921, Beverly Hills 90213 (213) 276-2726. 4-87-1t

FOR SALE—EQUIPMENT: AFC/Microdyne 4.3 Meter Conical Horn Satellite Antenna with Motor Drives and MAPS controller. Call KRIV-TV, (713) 626-2610, Wendell Wyborny, VP/CE. 4-87-1t

FOR SALE—EQUIPMENT: RCA TCR-100 with TR-60 Master Machine, TCR-100A with SP-100A both machines refurbished with 200D cartridges, Winder, Spare Heads, Parts and Central Air System. Call KRIV-TV, (713) 626-2610, Wendell Wyborny, VP/CE. 4-87-1t

FOR SALE—EQUIPMENT: RCA TR-60 2" Highband Videotape Machine with Spare Head. Call KRIV-TV, (713) 626-2610, Wendell Wyborny VP/CE. 4-87-1t

FOR SALE—EQUIPMENT: RCA—TVM-6A 76Hz Microwave System with two receivers, MACOM PAC 6.2, 7.5 subcarrier additions, Waveguide combiners, spare low voltage supply, klystrons, and misc. parts. Call KRIV-TV, (713) 626-2610, Wendell Wyborny VP/CE. 4-87-1t

¾" U-MATIC videocassette recorders: Panasonic NV-9200A. Many excellent features. Ideal for recording, playback or source recorder in a basic editing system. Excellent condition. \$1,200.00. Call 213-299-1411. 4-87-1t

HELP WANTED

HELP WANTED—TECHNICAL. VACATION RELIEF ENGINEER—KRIV-TV, Fox Television, Houston, is seeking a qualified vacation chief engineer. Must have minimum of 1 year MCR experience. FCC license preferred but not necessary. Send resume to: KRIV-TV, P.O. Box 22810, Houston, Tx. 77227, Attn: Mike Chase, E.O.E. 3-87-2t

HELP WANTED—TECHNICAL: ASSISTANT CHIEF ENGINEER—KRIV-TV, Fox Television, is seeking a qualified Assistant Chief Engineer. Must have minimum of 5 years television broadcast experience. Must have supervisory experience and be familiar with studio equipment, maintenance and UHF transmitter. Must also have good communication and budgeting skills. FCC license and SBE certificate required. Send resume to: KRIV-TV, P.O. Box 22810, Houston, Tx. 77227, Attn: Wendell Wyborny, VP/CE. 4-87-2t

TV TRANSMITTER AND STUDIO ENGINEER. Skilled in maintenance of broadcast transmitters and studio equipment. Equal opportunity employer. Send Resumes, Chief Engineer, WGBS TV, 420 N. 20th St., Phila., Pa. 19130. 4-87-1t

HELP WANTED (CONT.)

TRANSMITTER SUPERVISOR. 3 years high power UHF experience required. Studio maintenance experience preferred. Connecticut's leading independent. Pay commensurate with experience. EOE. Call Charles Allen (203) 575-2020. 3--87-2t

HELP WANTED—TECHNICAL: MASTER CONTROL OPERATOR—KRIV-TV, Fox Television, Houston, Tx., is seeking a qualified Master Control Operator. Must have minimum 2 years prior MCR experience. FCC license or SBE certification required. Send resume to: KRIV-TV, P.O. Box 22810, Houston, Tx. 77227, Attn: Wendell Wyborny, VP/Chief Engineer, E.O.E. 3-87-2t

VT EDITOR. International television news agency in New York. 1" BVU 800's & convergence exp. Satellite knowledge a plus. Some maintenance experience or willingness to learn. Salary history and resume to Broadcast Engineering, Dept. #677, P.O. Box 12901, Overland Park, KS 66212. 4-87-1t

SENIOR VIDEO/AUDIO SYSTEMS ENGINEERS

If you have at least 5 years experience in video / audio systems engineering and are a creative person, WE WANT YOU! We are expanding our operations into new modern facilities in scenic Salt Lake City. These immediate openings come with a compensation package that includes excellent benefits.

Centro

Setting new standards in the design and integration of teleproduction facilities and remote production vehicles.

WRITE TO:

Dave Taylor
Centro Corporation
369 Billy Mitchell Road
Salt Lake City, Utah 84116
No phone inquiries accepted

Want more
information on
advertised
products? Use the
Reader Service
Card.

Classified

HELP WANTED (CONT.)

SERVICE AND QC TECHNICIANS—Studer Revox seeks experienced Service and Quality Control Technicians for openings in both the Studer and Revox divisions. Thorough knowledge of recording systems is essential; experience with other audio components and microprocessor control systems preferred. Openings at Nashville headquarters. Excellent benefits, salary based on experience. Apply by written resume' only to: Doug Beard, Director of Technical and Marketing Services, Studer Revox America, 1425 Elm Hill Pike, Nashville, TN 37210. EOE. 4-87-21

MAINTENANCE ENGINEER: Come work in a fast growing Central Florida market. We're looking for a self-starter who can approach problems with a professional engineering attitude. Applicant should have prior experience in all areas of studio maintenance. Expert knowledge is needed in all tape machine formats as well as state of the art microprocessor based equipment. Salary commensurate with experience. E.O.E. Send resume to: Barry Edwards, WESH-TV, P.O. Box 7697, Orlando, FL 32854. 4-87-21

ASSISTANT ENGINEER, Design campus-wide television and audiovisual systems. Develop bid specifications. Coordinate installation of equipment and performance inspections. Bachelor's degree and two-year certificate (or Associate Degree) in an accredited electronic program. Please call (716) 831-3761. An Affirmative Action/Equal Opportunity Employer. 4-87-11

BROADCAST MAINTENANCE ENGINEER: Major NYC public television station. IBEW, NYC VHF seeks maintenance personnel experienced in SONY 2000, Betacart, Ampex APR-2, CMX, GVG, Vitifont and Tektronix. **COMPETITIVE SALARY/EXCELL. BNFTS.!** Send Resumes to: BOX BE 1094, 10 W. 20th St., NYC 10011. Equal Opportunity Employer. 4-87-11

HELP WANTED (CONT.)

HELP WANTED: Senior TV Maintenance Engineer for public broadcasting station in Rochester, NY. Design, repair and maintenance of television equipment, including 1" Ampex VTR, Sony BVU, Ikegami 357 cameras, ACE editor. Minimum five years experience required. Digital, microwave and transmitter experience desired. FCC general class license preferred. Competitive salary and excellent benefit package. Send resume and salary history to WXXI Personnel Dept., P.O. Box 21, Rochester, NY 14601 EOE. 4-87-11

MAINTENANCE ENGINEER. International television news agency in New York. Sony BVU 800's, 1" C format Ampex VPRs, computer editors, microwave, fiber optics. Editing capabilities a plus. Resume & salary to Broadcast Engineering, Dept. #678, P.O. Box 12901, Overland Park, KS 66212. 4-87-11

WANTED TO BUY

HIGHEST PRICES for 112 Phase Monitors, vacuum capacitors and clean, one kw or greater powered AM and FM Transmitters. All duty and transportation paid. Surplus Equipment Sales, 2 Throncliffe Park Dr., Unit 28, Toronto, Canada M4H 1H2, 416-421-5631. 3-86-tfn

WANTED: WW-II German and Japanese radio equipment. Unused US Navy and Signal Corps radio equipment before 1943. Pre-1923 radio equipment and tubes. August J. Link, Surcom Associates Inc., 305 Wisconsin Ave., Oceanside, CA 92054, (619) 722-6162. 7-86-tf

SAVE TIME

For fast, accurate service, please remove the peel off label used to address your magazine, and attach it to the Reader Service Card, the Address Change Card or to any correspondence you send us regarding your subscription.

Reconfirm your involvement in the broadcast industry!

Renew your subscription today.

REPRINTS

Interested in ordering article reprints out of this or another issue? * Reprints can be excellent learning tools for your technical staff and great marketing tools for your sales staff. Call or write Cynthia Sedler at Intertec Publishing Corp., P.O. Box 12901, Overland Park, KS 66212; (913) 888-4664.

* Minimum order 1,000 copies

Advertising sales offices

CHICAGO, ILLINOIS

Tom Nilsen
Phone: (312) 887-0677
(312) 887-0684
15 Spinning Wheel Rd.
Ste. 430
Hinsdale, IL 60521

NEW YORK, NEW YORK

Diane Gottlieb-Klusner
Phone: (212) 702-3404
Josh Gordon
Phone: (212) 702-3405
866 Third Ave.
New York, NY 10022

SANTA MONICA, CALIFORNIA

Herbert A. Schiff
Phone (213) 393-9285
Jason Perlman
Phone (213) 458-9987
Chris Woodbury
Phone (213) 451-8695
Schiff & Associates
501 Santa Monica Blvd., Ste. 504
Santa Monica, CA 90401

NORWOOD, AUSTRALIA

Hastwell, Williamson, Rouse Pty. Ltd.
P.O. Box 419
Norwood 5067, Australia
Phone: 332-3322
Telex: AA87113

LONDON, ENGLAND

Nicholas McGeachin
Suite 460, Southbank House
Black Prince Rd.
London SE1 7SJ
Telex: 295555LSPG
Telephones: 01-735-8171
01-587-1578

TOKYO, JAPAN

Haruki Hirayama
EMS, Inc.
Sagami Bldg., 4-2-21, Shinjuku
Shinjuku-ku, Tokyo 160, Japan
(03) 350-5666
Cable: EMSINCPERIOD
Telex: 2322520 EMSINCJ

INTERTEC
PUBLISHING CORPORATION

©1987. All rights reserved.

Ad index

	Page Number	Reader Service Number	Advertiser Hotline		Page Number	Reader Service Number	Advertiser Hotline
Abekas Video Systems	41	30	415/571-1711	3M Broadcast & Related Products	83	62	800/328-1684
Acoustic Systems	74	54	512/444-1961	M/A-Com Mac Inc.	27	16	617/272-3100
ADC Telecommunications, Inc.	123	95	612/893-3010	Matthews Studio Equipment	68	72	818/843-6715
ADM Technology, Inc.	IFC	1	313/524-2100	Midwest Communications Corp.	1	3	800/543-1584
ADM Technology, Inc.	70	39	313/524-2100	New England Digital	81	60	212/977-4510
Alamar Electronics USA, Inc.	62	15	408/866-9373	Odetics, Inc.	45	32	800/243-2001
Alpha Audio	130	103	804/358-3852	Opamp Labs Inc.	128	98	213/934-3566
Amber Electro Design Inc.	122	88	514/735-4105	Orban Associates Inc.	7	6	800/227-4498
Ampex Corp. (AVSD)	84-85	63	415/367-2911	Orban Associates Inc.	132	116	800/227-4498
Ampex Corp. (MTD)	56-57	41	415/367-2911	Orban Associates Inc.	17	11	800/227-4498
Arrakis Systems, Inc.	21	13	303/224-2248	Otari Corp.	119	91	415/592-8311
Audio Precision	112	67	800/231-7350	Otari Corp.	15	10	415/592-8311
Audio-Technica U.S., Inc.	96-97	66	215/443-0330	Panasonic Broadcast Systems Co.	79	57	201/348-7336
Barco	42	59	408/370-3721	Panasonic Broadcast Systems Co.	77	55	201/348-7336
Belar Electronics Laboratory Inc.	68	71	215/687-5550	Panasonic Broadcast Systems Co.	75	53	201/348-7336
Best Power Technology, Inc.	93	70	800/356-5794	PCO, Inc.	89	74	818/700-1233
Broadcast Electronics Inc.	39	27	217/224-9600	Polariod Corp.	66-67	48	800/225-1618
Broadcast Supply West	46	33	800/426-8434	Potomac Instruments	86	64	301/589-2662
Broadcast Video Systems Ltd.	118	108	416/764-1584	Ramsa/Panasonic	95	73	
BSM Broadcast Systems Inc.	82	85	509/448-0697	Rank Cintel	73	52	312/297-7720
BTS Broadcast Television Systems	47	18	801/972-8000	Rational Broadcast Systems	55	93	609/667-7300
C.O.A.R.C.	128	97	518/672-7202	Richardson Electronics Inc.	71	51	800/323-1770
Camera Mart, Inc.	99	75	212/757-6977	Roscor Corp.	101	77	312/539-7700
Christie Electric Corp.	78	56	800/421-2955	RTS Systems, Inc.	108	81	818/843-7022
Chyron Corp.	59	42	516/249-3018	Sencore	107	80	800/843-3338
Cipher Digital Corp.	60	43	301/695-0200	Sescom, Inc.	128	99	800/634-3457
Circuit Research Labs, Inc.	13	9	800/535-7648	Sharp Electronics Corp.	115	87	201/529-8731
Clear-Com Intercom Systems	32	21	415/861-6666	Shure Brothers Inc.	54	58	312/866-2553
Comark	30-31	19	215/822-0777	Shure Brothers Inc.	11	8	312/866-2553
Comrex Corp.	64	46	617/443-8811	Solutec Ltd.	122	89	514/521-5464
Continental Electronics, Div. of Varian	32	20	214/381-7161	Sony Corp. of America (Broadcast)	24-25	14	201/833-5231
Current Technology Inc.	94	107	214/238-5300	Sony Corp. of America (Broadcast)	34-35	23	201/833-5231
Data Security Inc.	48	35	800/225-7554	Sony Mag Tape	69	49	
Datatek, Inc.	29	34	201/654-8100	Standard Communications	111	84	800/243-1357
Datum Inc.	40	28	714/533-6333	Standard Tape Laboratory, Inc.	118	100	415/786-3546
Di Tech Inc.	IBC	2	516/667-6300	Stantron/unit of Zero Corp.	92	69	800/821-0019
Dubner Computer Systems	65	47	201/592-6500	Studer Revox America Inc.	37	25	615/254-5651
Dubner Computer Systems	129	101	201/592-6500	Surcom Associates Inc.	127	109	619/722-6162
Dynair Electronics Inc.	63	45	619/263-7711	Switchcraft Inc.	113	86	312/792-2700
ESE	131	104	914/592-6050	TASCAM Div. Teac Corp. of America	105	79	213/726-0303
Garner Industries	36	24	800/228-0275	Telex Communications, Inc.	43	31	612/887-5550
Graham-Patten Systems Inc.	120	50	916/273-8412	Telex Communications, Inc.	38	26	612/887-5550
Grass Valley Group, Inc.	9	7	916/273-8421	Telex Communications, Inc.	109	82	612/887-5550
Gray Engineering Laboratories	40	29	912/883-2121	TFT, Inc.	121	40	408/727-7272
H.M. Dyer Electronics, Inc.	118	92	313/349-7910	Topaz	90	61	619/279-0111
Harris Corp.	50-51	37	800/442-7747	Total Spectrum Manufacturing, Inc.	53	38	914/358-8820
Harrison Systems	87	65	615/834-1184	Utah Scientific Inc.	33	22	800/453-8782
Howe Audio	72	115	800/525-7520	Videomedia	103	106	408/745-1700
IGM Communications	49	36	405/232-5808	Videotek, Inc.	117	90	602/997-7523
Ikegami Electronics Inc.	124-125	96	201/368-9171	Ward-Beck Systems Ltd.	BC		416/438-6550
JamPro Antennas Inc.	28	17	916/383-1177	Winsted Corp.	130	102	800/328-2962
JVC Company of America	19	12	800/582-5825	Yamaha International Corp.	5	5	
Kikusui International	127	94	213/371-4662				
Lake The Systems Company	3	4	617/244-6881				
Lea Dynatech Inc.	104	78	213/944-0916				
Leitch Video of America, Inc.	61	44	804/424-7290				
Lightning Deterrent Corp.	132	105	800/241-2360				
M C G Electronics, Inc.	91	68	516/586-5125				

BROADCAST[®] engineering

the journal of broadcast technology

P.O. Box 12937 • Overland Park, Kansas 66212 • 913-888-4664

ADDRESS CHANGE CARD AND FREE SUBSCRIPTION FORM

Use the card to the right for new subscriptions or change of address. Please fill in the form completely. You need to complete this form ONCE A YEAR to remain on subscription list.

To apply for a BROADCAST ENGINEERING (free) subscription you must answer all questions. Fill in the form at the right completely.

For Address Change, you must include Company Name, or Station Initials, and complete Street Address in shaded box at right.

TO ENSURE UNINTERRUPTED DELIVERY TO NEW ADDRESS, BE SURE TO AFFIX LABEL FROM COVER IN SPACE PROVIDED AT RIGHT AND ANSWER ALL QUESTIONS.

1. Please check the ONE type of facility or operation that best describes your business classification:

- ☐ Low power TV station
- ☐ TV station
- ☐ AM station
- ☐ FM station
- ☐ AM & FM station
- ☐ TV & AM station
- ☐ TV & FM station
- ☐ TV, AM & FM station
- ☐ CATV facility
- ☐ Non-broadcast TV including closed circuit TV (CCTV)
- ☐ Recording studio
- ☐ Teleproduction facility
- ☐ Microwave, relay station or satellite company
- ☐ Government
- ☐ Consultant (engineering or management)
- ☐ Dealer, distributor or manufacturer
- ☐ Other: Specify

2. If you checked 20 through 26 above, which of the following best describes your over-the-air station: (Check only one.)

- ☐ Commercial
- ☐ Educational
- ☐ Religious
- ☐ Campus low frequency
- ☐ Community
- ☐ Municipally owned

3. Check the category that best describes your title: (Check only one.)

☐ **Company management**—chairman of the board, president, owner, partner, director, vice president, general manager (other than in charge of engineering or station operation management) and other corporate and financial officials

☐ **Technical management & engineering**—technical director or manager, chief engineer, other engineering or technical titles

☐ **Operations & station management/production & programming**—VP operations, operation manager/director, station manager, production manager, program manager, news director and other operations titles

4. IMPORTANT: Check the statement that best describes your role in the purchase of major communication equipment components and accessories.

- ☐ Make final decision to buy a specific make or model
- ☐ Recommend make or model to be purchased
- ☐ Have no part in specifying or buying

5. If none of the foregoing businesses or occupational categories fits your situations, please describe specifically your occupation or interest in BROADCAST ENGINEERING magazine

You must date and sign in this space...

BROADCAST[®] engineering

the journal of broadcast technology

P.O. Box 12937, Overland Park, KS 66212

***IMPORTANT**

Do you wish to receive or continue receiving your free subscription?
☐ Yes ☐ No

For address change you MUST affix label from cover here. Print new address below and answer ALL questions.

- ☐ 19
- ☐ 20
- ☐ 21
- ☐ 22
- ☐ 23
- ☐ 24
- ☐ 25
- ☐ 26
- ☐ 27
- ☐ 28
- ☐ 29
- ☐ 30
- ☐ 31
- ☐ 32
- ☐ 33
- ☐ 34

Please print or type:

Name _____

Title _____

Station or Co. _____

Co. Address _____

City _____ State _____ Zip _____

Other (please specify) _____

- ☐ A
- ☐ B
- ☐ C
- ☐ D
- ☐ E
- ☐ F

- ☐ A
- ☐ B

- ☐ C
- ☐ D

Other: Specify _____

- ☐
- ☐
- ☐

- ☐

Required Signature _____ Date _____

THANK YOU, NOW DETACH AND RETURN THIS PORTION.
S47



Place
First Class
Postage Stamp
Here

BROADCAST[®] engineering

P.O. BOX 12937
OVERLAND PARK, KANSAS 66212-0937

Circulation Department



DETACH AND RETURN ABOVE

BROADCAST[®] engineering

actively involved in planning, managing, and operating broadcast facilities, recording and teleproduction studios, CATV and non-commercial systems. In order to continue receiving **Broadcast Engineering** on a no-cost basis, you are required to verify your free subscription eligibility by filling out and returning this request form without delay. This information is needed for circulation and general marketing profiles. Your cooperation is appreciated.

After that date, please contact manufacturer directly.

BROADCAST[®] engineering

1. IMPORTANT: Do you wish to receive/continue to receive BROADCAST ENGINEERING FREE?

☐ Yes ☐ No

Your signature is required _____

Date _____

Please print or type:

Name _____

Title _____

Organization or firm _____

Street or box _____

City _____ State _____ Zip _____

Phone () _____

SAVE TIME: Use peel-off address label for faster service.

SEND ME MORE INFORMATION about products or services I have circled.

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64
65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96
97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128
129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160
161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192
193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224
225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256
257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288
289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320
321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352
353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384
385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416
417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448
449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480
481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512
513	514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543	544
545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567	568	569	570	571	572	573	574	575	576
577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594	595	596	597	598	599	600	601	602	603	604	605	606	607	608

RA7

2. Please check the ONE type of facility or operation that best describes your business classification:

- | | |
|---|---|
| 19 ☐ Low Power TV Station | 29 ☐ Recording Studio |
| 20 ☐ TV Station | 30 ☐ Teleproduction Facility |
| 21 ☐ AM Station | 31 ☐ Microwave, Relay Station or Satellite Company |
| 22 ☐ FM Station | 32 ☐ Government |
| 23 ☐ AM & FM Station | 33 ☐ Consultant (Engineering or Management) |
| 24 ☐ TV & AM Station | 34 ☐ Dealer, Distributor or Manufacturer |
| 25 ☐ TV & FM Station | |
| 26 ☐ TV, AM & FM Station | |
| 27 ☐ CATV Facility | ☐ Other _____ (Please specify) |
| 28 ☐ Non-Broadcast TV including Closed Circuit TV (CCTV) | |

3. If you checked 20 through 26 above, which of the following best describes your over-the-air station: (Check only one.)

- | | | |
|--|---|--|
| A ☐ Commercial | C ☐ Religious | E ☐ Community |
| B ☐ Educational | D ☐ Campus Low Frequency | F ☐ Municipally Owned |

4. Check the category that best describes your title: (Check only one.)

- A ☐ **Company Management**—Chairman of the Board, President, Owner, Partner, Director, Vice President, General Manager (other than in charge of Engineering or Station Operations Management) and other Corporate and Financial Officials
- B ☐ **Technical Management & Engineering**—Technical Director or Manager, Chief Engineer, Other Engineering or Technical Titles
- C ☐ **Operations & Station Management/Production & Programming**—VP Operations, Operation Manager/Director, Station Manager, Production Manager, Program Manager, News Director and other Operations Titles
- D ☐ **Other: Specify** _____

5. IMPORTANT: Check the statement that best describes your role in the purchase of major communication equipment components and accessories:

- ☐ Make final decision to buy a specific make or model
- ☐ Recommend make or model to be purchased
- ☐ Have no part in specifying or buying

FOR FASTER ACTION!!!

I have an immediate interest in the items I've indicated here. Please have a sales person call me.



PLACE
FIRST CLASS
POSTAGE
HERE

Which one advertisement in this issue was of most interest to you?

Advertiser's Name _____ Circle No. _____

Comments on this issue:

BROADCAST
engineering®

P.O. Box 12902
Overland Park, KS 66212-0902



YOU NAME IT.



With the Model 9001 you can create up to 80 alpha numeric labels for simplified studio operation.

When it comes to using a routing switcher matrix, most engineers agree that names make more sense than numbers. But 16 labels just may not be enough to describe the various departments and types of equipment found inside today's broadcast facility. That's why the Di-Tech Model 9001 Serial Controller permits as many as 80 *user-defined* names to be in use simultaneously!

Complementing this flexible naming system is a powerful set of configuration "tools" to make the best possible use of each and every control panel. All

major operating modes can be accessed by a single keystroke. Crisp, color screen displays provide key status information in an easy-to-understand manner. Among the many other features of the Model 9001 are switcher diagnostic routines, 4 level control, salvo operation, and one of the most important... the 5 year warranty... backed by the Di-Tech name.

For more information and a demonstration, call or write us today.



MODEL 9001 COLOR CRT SYSTEM CONTROLLER



di-tech inc.

Circle (2) on Reply Card

48 Jefryn Boulevard, Deer Park, New York 11729
Telephone (516) 667-6300, Telex No. 971806

Made to Measure!

Ward-Beck extended range meters are tailor-made specifically for the broadcast industry. These instruments measure audio levels over a sensitivity range of 80 dB with one continuous detented control.

The self-powered, 3 1/2" rack mounting units include LED status readouts and offer the choice of VU only (M405F), or dual VU/PPM (M405D) scales. The unique portable M405, with rechargeable ni-cad batteries, gives additional convenience and flexibility for measuring systems levels on a totally floating basis in those hard-to-get-at places.

The M405 Series . . . traditional Ward-Beck quality, carefully made-to-measure!



First by Design.

Ward-Beck Systems Ltd.
841 Progress Avenue, Scarborough,
Ontario, Canada M1H 2X4.
Tel: (416) 438-6550.
Tlx: 065-25399.

