



Lüthi

**Elektronik –
Feinmechanik**



Coupling-Decoupling Network

C D N L-801 S 15

IEC 61000-4-6

AE Port	Dsub15
EUT Port	Dsub15
Leads	screened cable 15 lines
Max. Voltage	100 V
Max. Current	0,25 A
IN Port	BNC 50 Ohm
Frequency range	0,15 ... 230 MHz
HF Power Dissipation	4 Watt

SCHWARZBECK MESS - ELEKTRONIK

Tel.: +49(0)6228/1001 www.schwarzbeck.de office@schwarzbeck.de

L 801 S15





CDN, Daten 15 Leiter geschirmt, Sub-D Buchse 15-pol.



CDN Data 15 leads screened, D-sub 15 female

**CDN Impedance and K-factor
in the frequency range 150 kHz - 230 MHz
in a test setup according to IEC 61000-4-6**

CDN Type S15

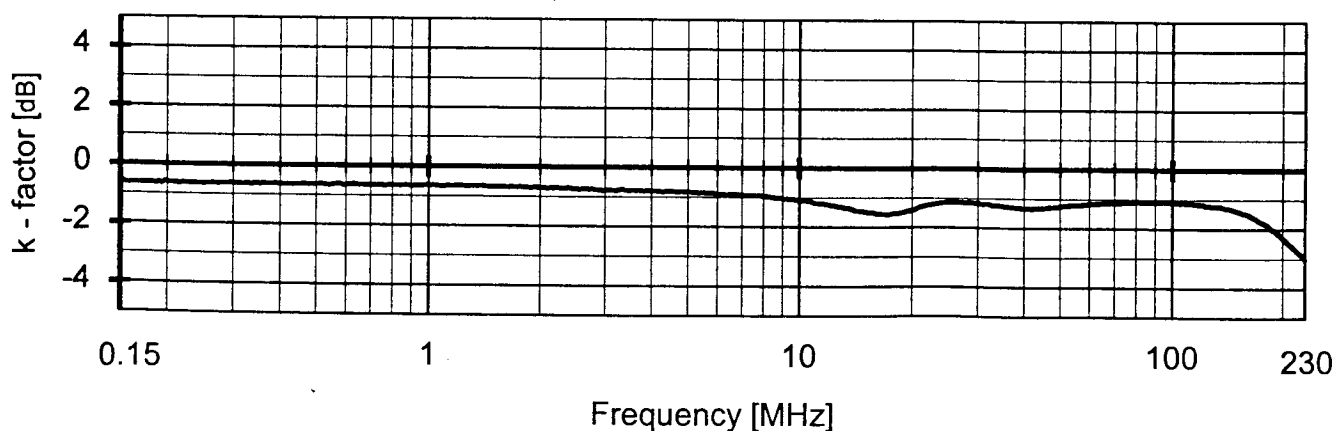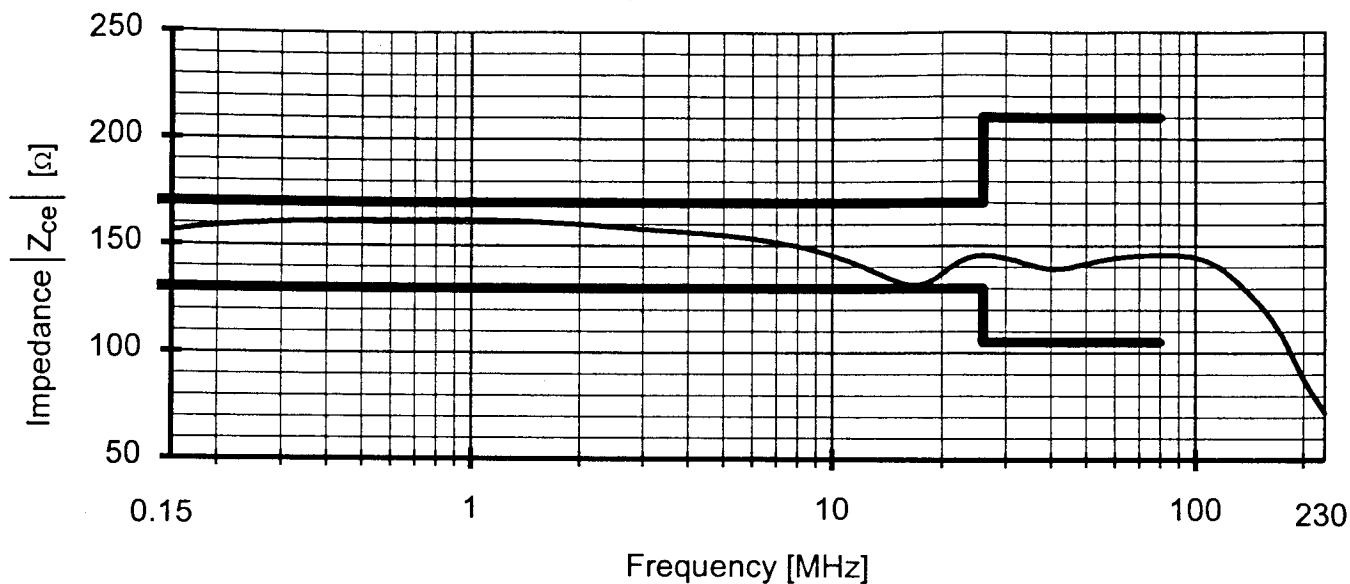

Equipment used:

Network Analyzer Typ ZVR	Inv. Nr. 4110
50 Ω to 150 Ω Adaptor	Inv. Nr. 4159
50 Ω to 150 Ω Adaptor	Inv. Nr. 4160

Location:

Reference for K-factor	EB15
Measurement Impedance	2002.04.26 11:14
Measurement K-factor	2002.08.16 08:57

EB15

Date and time:

2002.04.26 11:14
2002.08.16 08:57
2002.08.16 09:10