

Practical

Wireless

APRIL 1988 £1.20

ISSN 0141-0857

The Radio Magazine

Reviewed
THE ALINCO
ALX-2E
2m Handheld



FREE INSIDE
World HF Amateur
Beacon Map

Also
Build a VHF Monitor Receiver
from Modules
And
A Digital Dial

Yaesu's FT-736R. Because you never know who's listening.


Why just dream of talking beyond earth?

With Yaesu's new FT-736R VHF/UHF base station, you can discover some of the best DX happening in ham radio. Via moonbounce. Tropo. Aurora. Meteor scatter. Or satellites.

You see, the FT-736R is the most complete, feature-packed rig ever designed for the serious VHF/UHF operator. But you'd expect this of the successor to our legendary FT-726R.

For starters, the FT-736R comes factory-equipped for SSB, CW and FM operation on 2 meters and 70 cm, with two additional slots for optional 50-MHz or 1.2-GHz modules (220-MHz North America only).

Crossband full duplex capability is built into every FT-736R for satellite work. And the satel-

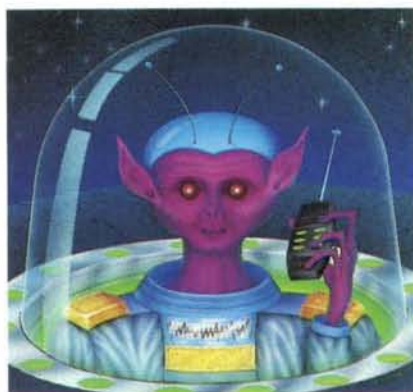

lite tracking function (normal and reverse modes) keeps you on target through a transponder.

The FT-736R delivers 25 watts RF output on 2 meters, 220-MHz, and 70 cm. And 10 watts on 6 meters and 1.2-GHz. Store frequency, mode and repeater shift in each of the 100 memories.

For serious VHF/UHF work, use the RF speech processor. IF shift. IF notch filter. *CW Narrow Optional and FM wide/ narrow IF filters. VOX. Noise blanker. Three-position AGC selection. Preamp switch for activating

your tower-mount preamplifier. Even an offset display for measuring observed Doppler shift on DX links.

And to custom design your FT-736R station, choose from these popular optional accessories: Iambic keyer module. FTS-8 CTCSS encode/decode unit. FVS-1 voice synthesizer. FMP-1 AQS digital message display unit. 1.2-GHz ATV module. MD-1B8 desk microphone. E-736 DC cable. And CAT (Computer Aided Transceiver) system software.

Discover the FT-736R at your Yaesu dealer today. But first make plenty of room for exotic QSL cards. Because you *never* know who's listening.

YAESU

*CW narrow optional



**UK Sole Distributor South Midlands Communications S.M. House, School Close,
Chandlers Ford Industrial Estate, Eastleigh, Hants SO5 3BY. Tel: (0703) 255111**

Prices and specifications subject to change without notice. FT-736R shown with 220-MHz option installed.

Practical Wireless

The Radio Magazine

APRIL 1988 (ON SALE 10 MARCH 1988)

VOL. 64 NO. 4 ISSUE 973

NEXT MONTH

★ FREE ★
★ DATACARD ★

VHF/UHF/
MICROWAVE
BEACONS in the
UK

The "Eightypole"
Portable
3.5MHz Antenna
plus

PW REVIEWS
of the Kenwood
TS-680S
HF/50MHz
Transceiver
and
AFtronics
SuperSCAF
Audio Filter
and

All the usual
features

Don't miss
it—place
your order with
your
newsagent now!

On sale
April 14

Contents subject to last-minute revision

24 PW Review

Alinco ALX-2E 144MHz Handheld
Mike Richards G4WNC

28 Making Waves—A Guide to Propagation—5

A. J. Harwood G4HHZ

32 Computing Corner

Paul Newman

35 A Digital Dial

The Kanga Gang

39 Practically Yours

Glen Ross G8MWR

40 Understanding Circuit Diagrams—2

R. F. Fautley G3ASG

47 The Schottky Diode—2

Brian Dance

52 Modular VHF Monitor Receiver

Rev. G. C. Dobbs G3RJV

55 Kitchen Konstruktion—No. 4

Richard Q. Marris G2BZQ

55 Errors and Updates

PW "Orwell", Mar. 1988

★ FREE INSIDE THIS ISSUE ★

(between pages 36 and 37)

PW HF Amateur Beacon Chart

Regular Features

71 Advert Index	18 News Desk	30 Short Wave Mag
50 Bookshelf	57 On the Air	56 Subscriptions
42 Book Service	44 PCB Service	26 Swap Spot
16 Comment	17 PW Services	16 Write On

Editorial and Advertisement Offices:

Practical Wireless
Enefco House
The Quay
Poole, Dorset BH15 1PP
☎ Poole (0202) 678558 (Out-of-hours
service by answering machine)
Prestel 202671191

Advertisement Manager

Roger Hall G4TNT ☎ 01-731 6222

Editor Geoff Arnold T.Eng FSERT G3GSR

Assistant Editor Dick Ganderton C.Eng. MIERE G8VFN

Art Editor Steve Hunt

Technical Features Editor Elaine Richards G4LFM

Technical Projects Sub-Editor Richard Ayley G6AKG

Editorial Assistant Sharon George

Technical Artist Rob Mackie

Administration Manager Kathy Etheridge

Clerical Assistant Claire Jackson

Accounts Alan Burgess

Why did we design and produce the HF125 receiver? Simply to provide the keen short wave listener with a receiver which offered not only all the facilities he or she needed in an HF receiver, but to give at the same time a level of performance which would cope easily with HF conditions likely to be encountered in Europe.

You all know the problems, high power broadcast stations pounding in at night, blotting out the weak signals you wanted to hear — and many of the unwanted signals were generated in your receiver itself. That we succeeded in designing a receiver which could solve the listening difficulties is obvious from comments from reviewers, but we also did it at an attractive price.

The HF125 performance ranks equal to or better than imported receivers at twice its price, and its success stretches around the world.

So what did the reviewers say. I'll give you a few comments, but for the full story why not send a stamped addressed envelope marked "HF125" and we will return a fully descriptive brochure with all the review comments included.

Quotes

"What is particularly important is the fact that so much attention has been paid to RF and IF performance; areas so lacking in many Japanese sets. Short Wave Listeners will be particularly pleased about the many choices of selectivity on AM." — Angus McKenzie

"I tuned straight to the 40 metre amateur band to see how it stood up to the battering from high powered propaganda broadcasters when attempting to resolve relatively weak amateurs striving to get contacts. The simple answer was, no problem." — Chris Lorek

"After an hour, drift was less than 50Hz in each instance. This is comparable with receivers in much higher price classes." — World Radio and TV Handbook

"I have no doubt that the Lowe HF125 represents extremely good value for money, and the performance far exceeds so much of its competition, including some receivers costing rather more." — Angus McKenzie

"It's refreshing to find a receiver that does exactly what it claims." — World Radio and TV Handbook

The HF125 costs £375 including vat. Need I say more?



HF125

Short Wave Receiver



TS940S

Top of the range, the TS940S has everything the discerning HF operator requires. Amateur bands from 160 to 10 metres, together with a general coverage receiver tuning from 150 kHz to 30 MHz. Operating modes USB, LSB, CW, AM, FM, FSK. Forty memory channels, each effectively a separate VFO. Easy keyboard frequency entry. Leadership in the field. The TS940S is the transceiver everyone wants to own one day.

TS940S ... £1995.00 (carr. £8)



TS140S

Kenwood common sense The TS-140S shows the way to go in balancing performance, operating features, and ease of use; all at an attractive price. All mode amateur band transmit with an excellent general coverage receiver. Full break in CW is provided for the real operators, but so is FM for idle chatting on ten metres (although why one would use FM in preference to SSB or CW I cannot imagine). Every TS-140S we can obtain is instantly sold. Ask around and you will find out why.

TS140S ... £862.00 (carr. £8)



R5000

Virtually the receive section of a TS940S, the R5000 is probably the best HF receiver right now. Notice the family resemblance to the TS440S which gives it a clean, easy to operate look, and of course Kenwood have applied all their ergonomic skills to make you "at home" the moment you begin to use the R5000. All mode of course, and has an optional internal VHF converter which extends coverage to 108-174 MHz.

R5000 ... £875.00 (carr. £8)



TL922

You Brute. If it wasn't for all the safety interlocks I would operate my TL922 with all the covers off, just to admire the sheer engineering beauty of the innards. The TL922 is THE linear amplifier, and once you own it you will never part. The effortless ease with which the TL922 produces RF power has to be experienced to be believed, and it is probably the world's most sought after station accessory.

TL922 ... £1495.00 (carr. £8)

Glasgow: 4/5 Queen Margaret Road Tel. 041-945 2626.

Darlington: 56 North Road Tel. 0325 486121.

Cambridge: 162 High Street, Chesterton Tel. 0223 311230.

Cardiff: c/o South Wales Carpets, Clifton Street Tel. 0222 464154.

London: 223/225 Field End Road, Eastcote, Middlesex Tel. 01-429 3256.

Bournemouth: 27 Gillam Road, Northbourne Tel. 0202 577760.

Note. All our shops open Tuesday to Saturday inclusive.



The TS-440S from Kenwood

As many of you know, Kenwood have a current policy of running three HF lines; the '1' series which started with the TS-120, went on to the TS-130, and now crowned by the TS-140; the top of the range '9' series having the TS-930 and TS-940; and the '4' series which began with the TS-430 and is now completed with the TS-440S.

The TS-440S is designed to be a compact version of the TS-940, and in RF performance it proves to be so. Chris Lorek, when reviewing the TS-440S said "There was no suggestion of the dreaded reciprocal mixing . . ." and went on to say "Trio engineers have done well considering the standard TS-940S performance – the TS-440 actually outperforms it in this respect." What this means in down to earth listening terms is that the receiver presents you with a quiet background, with signals simply appearing and disappearing when you tune across them, with none of the "sharsh" noises as you approach a strong signal. Kenwood engineering at its best.

Whilst on the subject of the receiver, Geoff Arnold said in his review in Practical Wireless, "The receiver in particular is a joy to use, with clever use of spare microprocessor power to give automatic bandwidth selection according to mode." Against this typifies the Kenwood belief that their equipment is designed to be used by a human being, and they want to make it as easy as possible for you to enjoy your hobby.

Of course not everyone wants to use their amateur licence for actually communicating with other people, and if you want to sit and count control knobs then Kenwood is not for you. I have just been looking at a colour spread picture in an American magazine which shows the very latest HF transceiver to appear on the market. It has 84 push buttons and 30 control knobs – and that is just on the front panel. You chaps with 10 fingers on each hand should be well pleased. Mind you, the TS-440 has 37 buttons so even we mortals with 5 fingers will be occupied fully.

As a radio amateur, there are other excellent design features to which your attention should be directed. Amongst the most obvious of these is the frequency

readout and the way it behaves. Sounds silly? Then consider tuning to 3750 kHz and chatting on lower sideband to Fred. The readout on the transceiver reads 3750 (of course). Then Fred says "Check me on upper sideband", and you move the mode switch to USB. If you are using a Kenwood rig, the readout still shows 3750 and you are indeed listening and transmitting on 3750 upper sideband. BUT – many other transceivers leap sideways by 3 kHz and you then have frantic retuning to find Fred. Small point you may say, but it is intensely irritating in use, and Kenwood make sure that it does not happen in their equipment; not HF, not VHF, not UHF.

By now you are probably thinking "The geriatric idiot is meandering again", but it never ceases to amaze me how lessons learned long ago need re-teaching at regular intervals, and minds need opening to old truths. That is, after all, what education is all about. Enough – back to the TS440S.

I absolutely guarantee that you will be impressed by the TS-440S when you sit down and use it; and that is best accomplished by going to one of our branches or your nearest Approved Kenwood Dealer. Don't bother with anyone who clearly doesn't have the background or connections to understand what the equipment is all about, because transceivers like the TS-440S are better explained by someone with genuine product knowledge and a willingness to do more than simply take your money.

For full details of the TS-440S, Kenwood produce an 8 page brochure which is yours for the cost of postage and packing. For full details of all the Kenwood range, simply send £1 and we will fill an envelope with info. and send it right back. If it takes 8 pages to describe the TS-440S there is no way in which I can adequately cram it into this space – send for the brochure.

73
John Wilson
G3PCY/5N2AAC

TS-440S £1138 inc. VAT

LOWE ELECTRONICS LIMITED

Chesterfield Road, Matlock, Derbyshire DE4 5LE
Telephone 0629 580800 (4 lines)



ICOM

THE NEW



IC-761, HF TRANSCEIVER with General coverage receiver.

The new ICOM IC-761 H.F. Transceiver has many features making it probably the best top of the line Amateur transceiver available today. This all mode transceiver features an internal tuning unit and A.C. power supply. The A.T.U. boasts a 3 second band selection and tune up with a VSWR matching of less than 1.3:1. For the serious operator the 100kHz-30MHz general coverage receiver and 105dB dynamic range make it ideal for DX chasing. Frequency selection is by the main VFO or via the front panel direct access keypad. And for when reception is difficult, pass band tuning, I.F. shift, notch filter, noise blander, pre-amp and attenuator should enable you to copy even those weak DX stations whether amateur or broadcast. The C.W. operator will appreciate the electronic keyer, 500Hz filter and full break in (40wpm) other filter options are available. The IC-CR64 high stability crystal is standard as is the CI-V communications interface for computer control. Twin VFO's and split mode for cross band contacts, the IC-761 features program scanning, memory scan and mode select scan and the 32 memories can store frequency and mode. The transceivers operating system is held permanently in ROM and is not dependant upon the lithium battery. The cell is used for memory back up only. A new style meter gives P.O., A.L.C., IC, VC, COMP and SWR readings.

Icom (UK) Ltd.

Dept PW, Sea Street, Herne Bay, Kent CT6 8LD. Tel: 0227 363859. 24 Hour.

Count on us!

FACE OF HF.

You can count on Icom HF Transceivers to give superior performance, take a close look at the Icom range and see for yourself. Authorised dealers throughout the U.K.



IC-751A.

Features:

- All mode.
- 100kHz-30MHz General Coverage Receiver.
- 100 watts.
- 12v Operation.
- 105dB Dynamic Range.
- 32 Memories.
- Electronic Keyer.
- Full Break In (40wpm).
- 500 Hz CW Filter.
- HM36 Microphone.



IC-735.

- Small Compact Size.
- 100kHz-30MHz General Coverage Receiver.
- 100 watts.
- 105dB Dynamic Range.
- FM Standard.
- 12v Operation
- Large LCD Readout.
- 12 Memories.
- CI-V Communications Interface
- HM12 Microphone.

Later in 1988 Icom are launching a terrific new HF transceiver, similar in size to the IC-735 but simpler to operate. This new HF rig is also realistically priced and aimed at a large section of Ham operators. The introduction of this new HF transceiver emphasises Icom's positive approach to market requirements.

Helpline: Telephone us free-of-charge on 0800 521145, Mon-Fri 09.00-13.00 and 14.00-17.30. This service is strictly for obtaining information about or ordering Icom equipment. We regret this cannot be used by dealers or for repair enquiries and parts orders, thank you.

Datapost: Despatch on same day whenever possible.

Access & Barclaycard: Telephone orders taken by our mail order dept, instant credit & interest-free H.P.





South Midlands C

SCHOOL CLOSE, CHANDLERS FORD IND. EST., EAST

FANTASTIC PERFORMANCE, FANTASTIC PRICE

NEW



FM Unit.....£39.99
MMB38.....£22.00
TCX6-747.....£TBA

The FT-747GX is a compact SSB/CW/Am and (optionally) FM transceiver providing 100 watts of PEP output on all hf amateur bands, and general coverage reception continuously from 100kHz to 30MHz. A front panel mounted loudspeaker and clear, unobstructed display and control layout make this set a real joy to use. Convenient features include operator selectable coarse and fine tuning steps optimized for each mode, dual (A/B) vfos, along with twenty memory channels which store mode and skip-scan status for auto resume scanning of selectable memories. Eighteen of the memories can also store independent transmit and receive frequencies for easy recall of split-frequency operations. Wideband (6kHz) AM and narrowband (500Hz) CW IF filters are included as standard, along with a clarifier, switchable 20dB receiver attenuator and noise blanker. User programming for more advanced control by an external computer is possible through the CAT (Computer Aided Transceiver) System. The transmitter power amplifier is enclosed in its own diecast aluminum heat-sink chamber inside the transceiver, with forced-air cooling by an internal fan allowing full power FM and packet, RTTY, SSTV and AMTOR operation when used with a heavy duty power supply.

FT747GX RRP £659.00 inc VAT

LET THE RADIO DO THE TALKING!




**FT212RH & FT712RH
NEW FROM YAESU**

We are pleased to announce a new series of FM VHF and UHF mobile transceivers for the amateur. The 45/5W FT-212RH and the 35/4W FT-712RH. Smaller than their predecessors these models utilize a new cpu with greatly expanded features, most notable of which are 19 memories and support for the DVS-1 Digital Voice System, which can digitally record and playback from the microphone or the receiver.

FT212RH.....£349.00.
FT712RH.....£375.00.
DVS1 Voice Memory Unit.....£79.00
FTS12 CTCSS Unit.....£60.38

COMING SOON from TOKYO HY-POWER The HT-100 SERIES

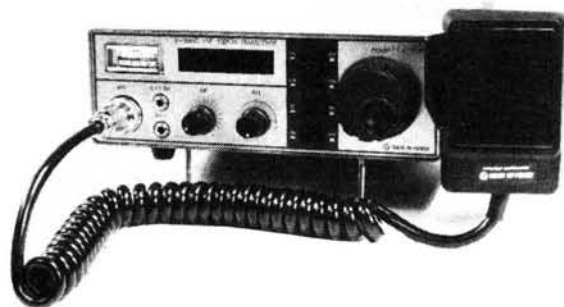

The HT100 series is a series of compact lightweight HF/VHF SSB/CW monoband transceivers from TOKYO HI-POWER.

Despite being so compact the transceivers feature everything necessary for the dedicated HF operator, including 20W (PEP) output (10W (PEP) HT106), digital display, 'S' meter and semi break-in on CW. Options available for the radios are HP-100S external PSU c/w loudspeaker, 500Hz CW filter, noise blanker unit and mobile mounting bracket.

HT-106 6m £325.00 HT-120 20m £299.00 HT-180 80m £299.00

HP-100S External PSU c/w Loudspeaker £99.00
HBK-100 Mobile Mounting Bracket £2.00

HNB-100 Noise Blanker Unit £59.95
HCF-1000 500Hz CW Filter £45.00

ALL TOKYO HY-POWER PRODUCTS CARRY 1 YEAR GUARANTEE

LEEDS
SMC (Northern)
Nowell Lane
Industrial Estate
Leeds LS9 6JE
Leeds (0532) 350606
9-5.30 Mon-Sat

CHESTERFIELD
SMC (Midlands)
102 High Street
New Whittington,
Chesterfield
Chest. (0246) 453340
9.30-5.30 Tues-Sat

BUCKLEY
SMC (TMP)
Unit 27, Pinfold Lane
Buckley, Clwyd
Buckley (0244) 549563
10-5 Tues, Weds, Fri
10-4 Sat

JERSEY
SMC (Jersey)
1 Belmont Gardens
St. Helier, Jersey
Jersey (0534) 77067
9-5 pm Mon-Sat
Closed Wed

N. IRELAND
SMC N. Ireland
10 Ward Avenue
Bangor
County Down
0247 271875

BIRMINGHAM
SMC (Birmingham)
504 Alum Rock Road
Alum Rock
Birmingham B8 3HX
(021-327) 1497/6313
9.00-5.00 Tues-Fri
9.00-4.00 Sat

AXMINSTER
Reg Ward & Co Ltd
1 Western Parade
West Street,
Axminster
Devon EX13 5NY
Axminster (0297) 34918
9-5.30 Tues-Sat



Southampton Showroom open 9.00-5.00 Monday to Friday, 9.00-1.00 Saturday. Service Dept open Mon-Fri 9.00-5.00.
AGENTS: JOHN DOYLE, TRANSWORLD COMMS, NEATH (0639) 52374 DAY (0639) 2942 EVE

DAVID STENNING, G4JA, LOUTH 0507 604967

Communications Ltd. YAESU

WIMBORNE, HANTS. SO5 3BY TEL: 0703 255111 FAX: 0703 263507 TLX: 477351

INTRODUCING THE FT736R FROM YAESU



The FT-736R is a solid-state, frequency-synthesised VHF and UHF amateur transceiver incorporating up to four band modules covering the 50, 144, 430 and 1200 MHz amateur bands. The standard model provides 25 watts RF power output on the 144 and 430 MHz amateur bands in SSB, CW, and FM modes, with any two of the remaining three bands installable as options (10 watts output on the 50 and 1200 MHz bands). An 8-bit CMOS main microprocessor and 4-bit i/o coprocessor provide exceptional digital integration and control: including selectable tuning rates or mode-dependent channelized tuning in selectable steps for each mode. Operating conveniences usually found only on HF transceivers, such as front panel adjustable IF shift and IF notch, a noise blanker, all-mode VOX and three-speed selectable AGC are included. GaAs FET receiver RF amplifiers are provided in the 430 and 1200 MHz band modules. The innovative memory system includes one hundred general purpose memories plus ten full duplex cross-band memories, all of which store mode and receive and transmit frequencies independently. In addition,

fourteen vfos are provided: two general purpose plus one PMS (Programmable Memory limit Scanning) on each band, two special-purpose full duplex vfos, and up to four clarifier (receiver offset) memories, one per band. Each of the two full duplex vfos can be selected so that its receive and transmit frequencies and modes can be displayed and tuned independently, or linked to tune synchronously in opposite directions for satellite operation. You can retain twelve satellite uplink/downlink modes in the special vfos and ten full duplex memories at all times. Of course, metering of either transmitter or receiver parameters is selectable during full duplex communications. For CW operators, the FT-736R offers quick-changeover semi break-in and includes provisions for an optional internal electronic keyer and narrow (600Hz) CW crystal filter. Naturally, with FM the predominant mode on the VHF and UHF bands, the FT-736R includes all manner of convenient features for both FM simplex and repeater operation, special narrow FM mode (to cut adjacent channel interference in crowded areas), Automatic Repeater Shift when tuned to 2-meter repeater subbands and a 1750Hz Burst Tone Generator is installed as standard. An enhanced CAT (Computer Aided Transceiver) System allows addition and customization of features and user-designed controls from an external computer. The FT-736R also includes a t/r-switched DC supply line for masthead preamplifiers, activated from the front panel, and digital input connection directly to the modulator for high performance packet radio tnc interfacing. Optional add-on accessories include the TV-736 Amateur Television Modulator/Demodulator for ATV operation, FIF-series CAT Interface Units, SP-767 External Loudspeaker, FMP-1 AQS Message Processor, and FVS-1 Voice Synthesiser and FTS-8 CTCSS Tone Squelch Unit (both mount internally).

OPTIONAL ACCESSORIES

FEX 736/50	50MHz module	£239.00	XF455MC	600Hz CW Filter	£60.00
FEX 736/1.2	1.2GHz module	£425.00	SP767	External Spkr c/w Audio Filters	£69.95
FMP-1	AQS Message Processor c/w display	£189.00	MD-1B8	Desktop Microphone	£79.00
FTS-8	CTCSS Tone Squelch Unit	£45.00	MH-1B8	Hand Scanning Microphone	£21.00
FVS-1	Voice Synthesiser Unit	£33.00	FIF232Cvan	CAT/INC Interface for Packet & CAT	£T.B.A.
Keyer Unit B	Internal Iambic Keyer Unit	£15.95	FIF232C	CAT Interface for RS232 O/P	£75.00
TV-736	Fast Scan TV (ATV) Mod/Demod Unit	£159.00	FIF65A	CAT Interface for Apple II series	£60.00

SEE INSIDE FRONT COVER FOR MORE DETAILS

FT736R R.R.P. £1450.00 C/W 2M & 70cms.

HY-GAIN - LOW PRICES

5% OFF JAYBEAM

By purchasing large stocks during December, S.M.C. is able to offer 5% discount for a limited period.

Due to the strong pound and our special purchase we can now offer for a limited period up to 15% discount on their range of antennas and 10% on their larger rotator Ham IV. Buy now whilst stocks last (from January 1st they increased their prices and if the dollar recovers prices could go up by 30% to 40%).

		Offer Price	p&p
12AVQ	Vert. 10-15-20M	£78.95	£3.75
14AVQ	Vert. 10-15-20-40M	£106.00	£3.75
18AVT	Vert. 10-15-20-40-80M	£172.00	£3.75
18V	Vert. 10-80M tapped coil	£48.50	£4.50
TH2Jnr	3 Ele. Yagi 10-15-20M	£289.00	£4.50
TH2MK3	2 Ele. Yagi 10-15-20M	£279.00	£4.50
EX14	5 Ele. 10-15-20M Explorer	£489.00	£7.50
OK710	EX14 to cover 40M	£139.00	£6.50
TH5MK2	5 Ele. 10-15-20M Tbird	£649.00	£7.50
TH7DXX	7 Ele. 10-15-20M Tbird	£765.00	£7.70
103BA	3 Ele. Yagi 10M	£99.00	£3.95

		Offer Price	p&p
105BA	5 Ele. Yagi 10M	£228.00	£3.95
153BA	3 Ele. Yagi 15M	£136.00	£3.95
155BA	5 Ele. Yagi 15M	£338.00	£5.90
203BA	3 Ele. Yagi 20M	£269.00	£4.90
204BA	4 Ele. Yagi 20M	£420.00	£7.30
205BA	5 Ele. Yagi 20M	£499.00	£9.40
DB10-15A	3 Ele. Yagi 10-15M	£289.00	£4.80
AR40	Famous Bell Type	£125.00	Free
CD45	Medium Bell Type	£219.00	Free
Ham IV	Heavy Duty Bell	£369.00	Free
T2X	Very Heavy Duty Bell	£449.00	Free

		Normal Price	Offer Price
H0/2M	Halo head only	£9.78	£9.29
HM/2M	Halo with 2ft. mast	£14.50	£13.93
UGP/2M	Ground plain folded radiator	£16.98	£16.11
C5/2M MK2	Vertical Colinear 4.8dbd	£90.85	£86.31
LR1/2M	Vertical Colinear 4.3dbd	£37.95	£36.05
LR2/2M	Vertical omnidirectional	£29.67	£28.13
LW5/2M	5 Element Yagi 7.8dbd	£14.69	£13.76
LW8/2M	8 Element Yagi 9.5dbd	£23.98	£22.78
LW10/2M	10 Element Yagi 10.5dbd	£29.07	£27.59
LW16/2M	16 Element Yagi 13.4dbd	£42.55	£40.42
PBM10/2M	10 Element Parabeam 11.7dbd	£70.50	£66.63
PBM14/2M	14 Element Parabeam 13.7dbd	£70.45	£66.64
Q4/2M	4 Element Quad 9.4dbd	£37.09	£35.24
Q6/2M	6 Element Quad 10.9dbd	£48.59	£46.16
D5/2M	5 over 5 slot fed Yagi 10.0dbd	£33.93	£32.23
D8/2M	8 over 8 slot fed Yagi 11.1dbd	£46.58	£44.25
5XY/2M	5 Element crossed Yagi 7.8dbd	£36.29	£34.42
8XY/2M	8 Element crossed Yagi 9.5dbd	£46.00	£43.70
10XY/2M	10 Element crossed Yagi 10.8dbd	£57.50	£54.63
PMH2/C	2 Way harness circ. polarisation	£14.51	£13.83
PMH2/M	2 Way harness for 2 Metres	£14.89	£14.15
PMH4/2M	4 Way harness for 2 Metres	£36.80	£34.96
JAYBEAM 4M/6M			
DB4	4M/6M Dual Band 4 Ele	£117.88	£111.99
4Y6M	6M 4 Ele 7dbd	£49.45	£46.98
4Y4M	4M 4 Ele 7dbd	£49.54	£47.81
PMH2-4M	4M 2 Way Phasing	£29.87	£28.33

Prices & availability subject to change without prior notice.

FREE FINANCE

On many regular priced items SMC offers. Free finance (on invoice balances over £120) 20% down and the balance over 6 months or 50% down and the balance over a year. You pay no more than the cash price!

Details of eligible items available on request.

FREE S.M.C. SERVICE INTERLINK DELIVERY

Free interlink delivery on major equipment. Small items, Plugs, Sockets, etc. by post £1.75. Antennas, Cables, Wire & larger items. Roadline up to £5.00. Interlink delivery available, upon request, for items other than radios, from £7.30 depending on weight. Same day despatch whenever possible.

GUARANTEE

Importer warranty on Yaesu Musen products. Ably staffed and equipped Service Department. Daily contact with the Yaesu Musen factory. Tens of thousands of spares and test equipment. Twenty-five years of professional experience.

● 2 years warranty on regular prices Yaesu products.

C.M.HOWES COMMUNICATIONS

**Eydon, Daventry,
Northants NN11 6PT
(mail order only)
Phone: 0327 60178**

NEW! 2M and 6M CONVERTER KITS

If you have a receiver that covers the 20M amateur band, you can use it to monitor the 2 and 6 Meter bands by adding the new **HOWES CV220** and **CV620** frequency converter kits to your station. Suitable for use with our popular **DcRx20** receiver kit, these new converters can also be used with any general coverage communications receiver (no modifications to the receiver are involved, they simply connect externally to the antenna socket).

An excellent constructional project could combine these two new kits, together with one of our **DcRx20** SSB/CW receiver kits. This will give a great little monitor receiver covering three of the DX chasers most favoured bands. A really cost effective way of enjoying the "weak signal mode" DX on 2 and 6 meters, together with the most popular HF DX band.

CV220 or CV620 kit: £17.50 Assembled PCB module: £23.90

HOWES FINISHED EQUIPMENT RANGE

HC266 2M to 6M transverter. 10W RF output with ALC, VSWR protection and very low harmonics. Case specially manufactured to high standards by computer controlled machine tools. 1 to 5W drive level standard, 5 to 10W drive available as a no cost option. Operators handbook includes block and schematic diagrams. **HC246 4M** output version may be available by the time you read this. Price including post and VAT: **£179.90**, normally available off the shelf from us, and from selected retailers.

HOWES KIT RANGE includes:

DcRx20,	DcRx40, DcRx80, DcRx160	SSB/CW Receivers
CTX40,	CTX80	QRP CW Transmitters for 40 and 80M
MTX20	10W CW TX for 20M	
CVF20,	CVF40, CVF80	VFOs for above transmitters
HC220,	HC280	2M to HF transverters, 10W output
CSL4	Dual bandwidth SSB/CW filter for DcRx	
ASL5	Dual bandwidth filter for "black boxes"	
TRF3	Shortwave Broadcast receiver	
CTU30	HF bands ATU for receiving or 30W TX	
SWB30	SWR/Relative power indicator, 160 to 2M	
CM2	Quality microphone with VOGAD	
AP3	Automatic Speech Processor	
ST2	Sine-wave side-tone/practice oscillator	
XM1	Crystal Calibrator with 8 marker intervals	

KIT Assembled PCB

£15.30	£20.90
£13.40	£19.40
£21.90	£27.70
£9.90	£15.90
£52.50	£83.50
£9.90	£15.90
£14.90	£22.50
£14.50	£19.90
£24.90	£29.90
£11.90	£16.50
£11.20	£15.20
£15.90	£22.80
£8.60	£12.90
£16.80	£21.90

All HOWES KITS include a high quality glass-fibre PCB with screen printed parts locations, full instructions and all board mounted components. Tuning capacitors to suit our receivers and VFOs (except 160M) are available at £1.50 extra (DcRx needs two, TRF3 and CVF need one).

A copy of our free catalogue and information sheets on any products you are interested in available for an SAE.

Please add 90p P&P for kit orders.

UK delivery is normally within 7 days.

73 from Dave G4KQH,
Technical Manager.



HELPING TO BUILD YOUR STATION

R.A.S. (Nottingham)

**G6XBH
G1RAS
G8UUS**

Radio Amateur Supplies
Tel: 0602 280267

Visit your Local Emporium

Large selection of New/Used Equipment on Show

AGENTS FOR:

**F.D.K.
AZDEN
ICOM
YAESU
ALINCO
KEMPRO**

ACCESSORIES:

**Welz Range
Microwave Modules
Adonis Mics
Mutek Pre-Amps
Barenco Mast Supports
DRAE Products
BNOS Linears & P.S.U.'s**

AGENTS FOR CELLNET AND VODAFONE RADIOS

AERIALS, Tonna, Halbar, New Diamond Range of Mobile Whips, Jaybeam

BRING YOUR S/H EQUIPMENT IN FOR SALE

JUST GIVE US A RING

Monday: CLOSED Tuesday-Saturday: 10.00am to 5.00pm

3 Farndon Green, Wollaton Park, Nottingham NG8 1OU
Off Ring Rd., between A52 (Derby Road) & A609 (Ilkeston Road)

LAKE ELECTRONICS

DTR3 CW TRANSCEIVER for 80 METRES

This compact and lightweight TX/RX is an ideal QRP rig for the popular 80 Metre band. Great for portable and holiday operation!

Transmitter —	Mode: CW
	Range: 3.5-3.6MHz
	Power: 1.5W output
Receiver —	Direct Conversion
	Selectivity — 250Hz / 6dB
	Sensitivity — Better than 1uV
	AF Output — up to 250mW to 8 ohm headphones
	Power requirements — 450mA (key down) at 12-14 Vdc

ALL parts are included in the Kit. Not only the case, slow motion drive, good quality variable capacitor, knobs, hardware etc., but important features which, in some kits, are regarded as extras — stable VFO, Audio Filter, RIT — **PLUS** ready printed front and back Panels for that "Professional" finish.

In fact, the only other things you'll have to find are a morse key, headphones and the price — **£74.25** plus £2.00 postage and packing.

For further details of the DTR3 and other kits in our range, send a SAE to:

LAKE ELECTRONICS, 7 MIDDLETON CLOSE, NUTHALL, NOTTINGHAM NG16 1BX.
or ring Alan, G4DVM on (0602) 382509

Kantronics packet radio



Packet radio is one of the fastest expanding areas in Amateur Radio. Access is available to national and international data, messages may be left on 'mailboxes', and of course you may conduct a QSO just like RTTY or AMTOR.

KPC2 £159 inc. vat. (carr £8)

This is not just a basic TNC but more of a 'Packet Special'. Over 100 user commands are available, and operation can be on HF or VHF/UHF via its single port.

Features include 3 — state squelch, multi connect, digipeat, TTL or RS232 compatible, personal mailbox — and now WEFAX is included.

KAM £265 inc. vat. (carr £8)

All the features of the KPC2 but with two independent ports for HF and VHF, allowing gateway operation. All mode operating via the HF port — Packet, AMTOR, RTTY, CW, ASCII, and now WEFAX included.

KPC4 £298 inc. vat. (carr £8)

A dual port TNC allowing simultaneous operation on two bands (if you can keep up the pace). All the features of the KPC2 plus gateway between ports.

P.S. WEFAX means you can receive those wonderful Met forecast pictures off-air. P.P.S. You need a simple computer as well!

LOWE ELECTRONICS LIMITED Chesterfield Road, Matlock, Derbyshire DE4 5LE Telephone 0629 580800 (4 lines)

DEWSBURY

ELECTRONICS

From the makers of the world renowned STAR MASTERKEY a new MORSE KEYBOARD.

CQ – CQ – CQ

Indication of speed on 7 segment display.

KEYBOARD

TO

MORSE CODE

Type ahead buffer with status leds transmission of stored messages.

Send perfect morse morse as easily as typing a letter. It has never been as easy to send morse.

Indication of operating mode on leds. Sidetone and relay output for all types of transmitter.

For Full Details Send S.A.E. To:

Variable transmission. Speed 1-99 wpm or up to 400 wpm.

DEWSBURY ELECTRONICS

Full QWERTY keyboard with real keys.

176 Lower High Street, Stourbridge,
West Midlands DY8 1TG

Metal cased for RF immunity.

Tel: Stourbridge (0384) 390063/371228

Morse Tutor

Learning morse with D70 is fast and painless. And you can "do it anywhere" because D70 is built to travel and the battery lasts for months. Field proven by thousands of users.

Price: £56.35 Inc. VAT

To order simply dial

0532 744822

or write with cheque or postal order to



Dept. PW Datong Electronics Ltd. Clayton Wood Close, West Park, Leeds LS16 6QE

Access/Barclaycard welcome – Fast delivery service

Catalogue and data sheets on any product available free on request. Dial 0532 744822 (2 lines)



SPECTRUM COMMUNICATIONS

MANUFACTURERS OF RADIO EQUIPMENT AND KITS

A SAMPLE OF OUR RANGE OF PCB's

PRODUCT	PCB Kit	PCB Built
2m Transmitter FTX201	£43	£64.50
Receive Converters, RC2-10, RC4-10, RC6-10, RC6-2, RC4-2	£17.25	£24.50
Transmit Amplifiers		
TA2S1, TA4S1, TA6S1	£33.00	£40.25
TA2U2, TA4U2, TA6U2	£41.25	£52.50
Receive Preamps		
RP2S, RP4S, RP6S, RP10S, RP15S, RP20S	£14.75	£22.25
Transmit Buffer TB28E	£7.00	£9.50
Frequency Modulator & Demodulator FM455	£8.25	£12.25
Noise Squelch NS1000	£9.50	£14.00
Speech Processor SP444E	£15.00	£20.50
10.7MHz IF Filter Board SF10-7	£7.00	£8.00
10FM Conversion Board SC29	—	£18.50
Autotoneburst AT1750	£3.50	£5.50
Piptone PT1000S	£5.75	£8.00
Kaytone KT1000	£7.75	£11.25

And many more items including transverters and boxed kits or ready built. Send for list.

FM CONVERSIONS

FOR YAESU & KENWOOD TRANSCEIVERS

FD311X & FM2000 for FT101, 101B, 101E, 101Z, 101ZD, 901, 902, 107, 107M, 77S, 77, 707, 200, 250, 7B, all £71.
FD311X & FM3000 for TS120V, 120S, 130V, 130S, 520, 520SE, 530, 830, 930, all £81.

State rig type when ordering.

STOCKISTS & AGENTS

AUDIO & DOMESTIC SPARES, RAMSEY, ISLE OF MAN,
GEOFF BROWN, ST HELIER, JERSEY.
KENT ELECTRONICS, HOEK, HOLLAND
ELECTRO-COM NI, LISBURN, NORTHERN IRELAND.
TRUCK KING, WATFORD, HERTS.
MGR SERVICES, BIRKENHEAD, MERSEYSIDE.
S.J. TONKS, WALSALL, WEST MIDLANDS.
D.X. SUPPLIES, EXETER, DEVON.
SYSTEM DESIGN, BANBURY, OXFORDSHIRE.
CB SERVICES, SIDCUP, KENT.
RADIO REPAIRS, WEAVERHAM, CHESHIRE.
BREDHURST ELECTRONICS, HANDCROSS, W. SUSSEX.
AND MANY OTHERS.

VAT & P&P INC PRICES
Delivery within 14 days if available.
24 hr answering.

SHOP TIMES: 9am-1pm & 2pm-5pm TUES-FRI
9am-1pm & 2pm-4pm SAT
CLOSED SUNDAY & MONDAY

UNIT B6 MARABOUT INDUSTRIAL ESTATE, DORCHESTER, DORSET. TEL: 0305 62250

AKD

Unit 5
Parsons Green Estate
Boulton Road
Stevenage
Herts SG1 4QG



THE FILTER SPECIALISTS



MAIL ORDER DEPT.
Stock Items Normally
Despatched within 48 hours,
21 days latest.
TEL. 0438 351710

TV INTERFERENCE PROBLEMS??!!

Are you having trouble receiving a watchable picture on your TV? If so, the cause may be airborne interference. For many years AKD has manufactured a low cost range of in-line interference suppression filters that are easily inserted into the aerial system to help reduce the effects of interference from local taxi radio, CB, amateur radio, airport radar, etc. Each filter is terminated in standard aerial co-ax plug and socket and requires no external power. Fitting could not be more simple. No technical knowledge is needed. There are 13 standard stocked filters in our range, but individual filters can be tuned to reject interference at specific frequencies if required. If you are not sure which filter type to order or have any questions regarding interference phone our helpline on 0438 351710 and ask for John who will be pleased to assist you in making the best choice of filter.

THE FILTER RANGE IS AS FOLLOWS:

FILTER TYPE RBF1

A range of filters designed to eliminate Radar Blip, especially noticeable on video recorders. Stocked on channel 36 and 846MHz (RAF Boulmer interference) can be tuned at our factory from 420MHz to 890MHz. £6.75 each

FILTER TYPE TNF2 (Suitable for UHF TV only)

A range of Tuned Notch filters stocked on generally useful frequencies used by Amateur Radio operators, CB users, Private Taxi companies. Can also be factory tuned to reject any spot frequency up to 300MHz. Now stocked at 50 & 70 MHz. £7.75 each

FILTER TYPE HPF1

Used in weaker reception areas for general interference problems. Use with UHF TV, Video & Pre-Amps £6.75 each

FILTER TYPE HPF5

Used in strong signal area for severe interference on UHF only £7.00 each

FILTER TYPE BB1

A general purpose filter that can be used on its own or together with other filters in our range for severe interference problems. Ideal at the input of VCR and Pre-Amps. £6.75 each

WA1 WAVEMETER £24.95




Our Waveabsorption meter for 2 Mtre transmitters meets licensing requirements range 120MHz to 450MHz, very sensitive, can also be used as field strength meter within its range. Requires PP3 type battery (not supplied).

HFC1 CONVERTER £49.00



For the FRG 9600/965 our new HF Converter, connects to the aerial socket, and powered direct from the 8 Volt o/p of the FRG 9600. Tune from 100, 1MHz to 160MHz, gives tuning range of 100KHz to 60MHz, uses double balanced mixer, with low pass filter on input.
★ Can be supplied with BNC termination for other scanners ★


WA2 WAVEMETER £24.95



Our Wave absorption meter for the 50 & 70 MHz Bands. Meets licensing requirements. Can also be used as field strength meter within its range. Requires PP3 battery (not supplied).

Unifilter 'CLAMP-ON' RADIO-FREQUENCY CHOKE

PHONE OR SAE FOR PRODUCT SPECIFICATION & APPLICATION NOTES



Allows leads to be toroidally protected without the need to cut or remove plugs or connectors. Ideally suited for moulded plugs, leads, ribbon, and large diameter cables. Can easily be fitted and stacked in multiples to increase rejection. 'UNIFILTER' works by suppressing the interference currents that flow along the outside of cables without affecting the signals or power flowing inside. This means that you don't need to worry about upsetting normal operation or invalidating guarantees. Suitable for both reducing the emission of, or rejecting the effect of, 'common mode' interference as experienced on computer, hi-fi & speaker leads, as well as the normal mains & aerial cables.

UF 4 KIT (SUITABLE FOR SMALLER INSTALLATIONS) £9.89

UF 8 KIT (FOR MULTI INSTALLATIONS) £19.55

ALL PRODUCTS ARE AVAILABLE FROM US DIRECT
MAIL ORDER OR WHY NOT MAKE USE OF OUR ACCESS
& VISA FACILITIES TO ENSURE MINIMUM DELAY

ALL AKD PRODUCTS CARRY THE USUAL AKD 2 YEAR
GUARANTEE. PRICES QUOTED ARE CORRECT AT TIME
OF GOING TO PRESS AND INCLUDE VAT,
POSTAGE & PACKING

Props: RT & VEL Wagstaffe. Technical Adviser: John Armstrong

TRADE ENQUIRIES
WELCOME

Reg Ward & Co. Ltd.

1 Western Parade, West Street, Axminster, Devon, EX13 5NY.
Telephone: Axminster (0297) 34918

Yaesu

FT767	HF Transceiver	1550.00	(—)
FT767(2)	10m Module (167)	160.00	(3.00)
FT767(70)	70cm Module (70)	215.00	(3.00)
FT767(16)	6m Module (167)	160.00	(3.00)
SP767	Speaker	60.95	(2.50)
FT290	Mini New Super 290	429.00	(—)
FT290	2m M-Mode Port/Transceiver	379.00	(—)
NC111	Mobile Bracket	37.50	(2.00)
NC111	Charger	10.50	(2.00)
CSC1	Carrying Case	6.50	(2.00)
YHA15	2m Helical	75.00	(2.00)
YHA440	70cm 1/2wave	12.50	(2.00)
YMA9	Speaker Mike	22.00	(2.00)
MMB15	Mobile Bracket	14.55	(2.00)
FT23	2m Mini HH	223.50	(3.00)
FT23	70cm Mini HH	243.50	(3.00)
FN89	Spare Battery Pack (23/73)	25.00	(2.00)
FN810	Spare Battery Pack (23/73)	30.00	(2.00)
FN811	Spare Battery Pack (23/73)	46.00	(2.00)
NC 18C	Charger (23/73)	12.35	(2.00)
NC28	Charger (23/73)	15.40	(2.00)
NC29	Base Charger (23/73)	53.00	(3.00)
PA6	Car Adapter/Charger (23/73)	16.00	(2.00)
MH12A2B	Speaker Mic	27.00	(2.00)
FT727	2m/70cm HH	425.00	(3.00)
FN83	Spare Battery Pack	41.00	(2.00)
FN84	Spare Battery Pack	46.00	(2.00)
FN85	Empty Cell Case	10.00	(2.00)
FR3600M	60-500MHz Scanning RX	509.00	(3.00)
MMB10	Mobile Bracket	10.00	(2.00)
NC9C	Charger	11.50	(2.00)
PA3	Car Adapter/Charger	21.80	(2.00)
FN82	Spare Battery Pack	27.50	(2.00)
YMA4A	Speaker Mike	27.00	(2.00)
FT726R	2m Base Station	349.00	(3.00)
430726	70cm Module for above	639.00	(—)
FR38800	HF Receiver	100.00	(2.50)
FRV8800	Converter 118-175 for above	59.00	(2.50)
FR17700RX	ATU	21.00	(2.00)
MH1B8	Hand 600 8pin mic	89.70	(2.50)
MD1B8	Desk 600 8pin mic	25.00	(2.00)
BM1A3B	Mobile mobile mic	19.99	(2.00)
YH77	Lightweight phones	19.99	(2.00)
YH59	Padded phones	19.99	(2.00)
YH11	Lightweight Mobile Hset Boom mic	22.00	(2.00)
SB1	PTT Switch Box 208/708	22.00	(2.00)
SB2	PTT Switch Box 280/750	22.00	(2.00)
SB10	PTT Switch Box 270/2700	22.00	(2.00)
FT736 NEW	270cm 25W Base Stn	1450.00	(—)
FT147CX	160-10 All mode TX Gen. Cov.	669.00	(—)
FT231IR	23cm FM Transceiver	475.00	(—)

Special

Price

(—)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

(3.00)

ICOM

IC761	New Super HF Transceiver	1465.00	(—)
IC751A	HF Transceiver	1465.00	(—)
IC735	New HF Transceiver	949.00	(—)
AT100	100W ATU (751/745)	365.00	(3.50)
AT150	150W ATU (751/745)	315.00	(3.50)
PS55	Ext PSU (735)	185.00	(3.00)
IC505	50MHz multi mode portable	459.00	(—)
IC290D	2m 25W M-Mode	542.00	(—)
IC28E	25W FM	359.00	(—)
IC28H	2m 45W FM	399.00	(3.00)
IC29H	2m New Mini HH	239.00	(3.00)
IC29H	2m The Original HH	225.00	(3.00)
IC29H	2m HH	269.00	(3.00)
IC29H	New 2m 25W Base Stn	1039.00	(—)
IC4E	70cm HH	285.00	(3.00)
IC4E	70cm HH	299.00	(3.00)
IC4E	70cm 25W FM Mobile	449.00	(3.00)
IC490	70cm 10W M-Mode	556.00	(—)
IC3200	2m/70 Dual Band FM Mobile	428.00	(3.00)
IC12H	23cm HH	825.00	(—)
ICR71	Gen Cov RX	957.00	(—)
IC7000	VHF/UHF Scanner	82.00	(3.00)
AI7000	Ext Speaker	61.00	(2.50)
CK70	DC Cable (R70/R71)	7.00	(2.00)
EK257	FM Board (R70/R71)	70.15	(2.50)
GC5	World Clock	43.00	(2.00)
AG2	Waterproof Bag all Icom HH	14.38	(2.00)
BC35	Battery Pack 8.4V (2/4E/02/04E)	29.90	(2.00)
BP3	Empty Battery Case (2/4E/02/04E)	9.20	(2.00)
BP4	Battery Pack 10.8V	60.95	(2.50)
BP5	Battery Pack 13.2V (02/04E only)	74.75	(2.50)
BP6	Battery Pack 8.4V	71.30	(2.50)
BP7	12V Charge Lead BP3/7/8	6.90	(2.00)
BP8	DC/DC converter operate from 12V	17.25	(2.00)
CP1	2m Helical BNC	9.20	(2.00)
DC1	70cm Flexible 1/4 wave Antenna (BNC)	9.20	(2.00)
FA2	Speaker Mic	21.85	(2.50)
FA3	Head set Boom Mic	20.70	(2.00)
HS10	Vox Unit HS10 (02/04E only)	25.30	(2.00)
HS10S	PTT SW Box HS10	20.70	(2.00)
LC1	Leatherette Case 2E/4E + BP5	6.90	(2.00)
LC2	Leatherette Case 2E/4E + BP3	6.90	(2.00)
LC11	Leatherette Case 02E/04E + BP3	9.20	(2.00)
LC14	Leatherette Case 02E/04E + BP5/7/8	9.20	(2.00)
SC1	Shoulder Strap	10.35	(2.00)
SM6	600ohm 8P Base Mic	46.00	(2.50)
SM8	13k 600ohm 8P Base Mic	82.00	(2.50)
SM10	Comp/Gain Mic	116.00	(3.00)

CW Keys

VIBROPLEX	lambic Standard	63.33	(3.00)
VIBROPLEX	lambic Deluxe	78.09	(3.00)
VIBROPLEX	Vibrokeyer Standard	63.98	(3.00)
VIBROPLEX	Vibrokeyer Deluxe	78.09	(3.00)
The Original Standard		73.54	(3.00)
The Original Deluxe		82.74	(3.00)
BENCHER	Squeeze Key, Black base	67.42	(3.00)
BENCHER	Squeeze Key, Chrome base	76.97	(3.00)
KENPRO	Squeeze CMOS Keyer	109.25	(2.50)
KENPRO	Memory Squeeze Keyer	234.55	(3.00)

KENWOOD

TS940S	9 Band TX General Cov RX	1995.00	(—)
AT340	Auto ATU	244.00	(3.00)
SP940	Ext Speaker	87.55	(3.00)
TS930S	9 Band TX General Cov RX	1695.00	(—)
AT930	Auto ATU	206.01	(3.00)
SP930	Ext Speaker	90.94	(3.00)
TS440	9 Band TX General Cov RX	1138.81	(—)
AT440	Auto ATU	144.82	(3.00)
PS50	H/Duty PSU	222.49	(3.00)
TS380S	160-10m Transceiver 9 Bands	1098.00	(—)
SM220	All Band ATU/P/W Power	208.67	(3.00)
SP730	External Speaker Unit	66.49	(3.00)
PS430	Matching Power Supply	173.78	(3.00)
SP430	Matching Speaker	40.81	(3.00)
MB430	Mobile Mounting Bracket	15.80	(3.00)
FM430	FM Board for TS430	48.05	(3.00)
SM720	Station Monitor	343.52	(3.00)
BS8	Band Scope Unit (830/940)	77.00	(2.50)
TL322	10/160 2kW Linear	1495.00	(—)
TH215	2M Mini HH	189.00	(3.00)
TH41	70cm Mini HH	218.00	(3.00)
TH205	2M HH	215.26	(3.00)
TH215	2M HH Keyboard	252.13	(3.00)
TR751	2M 25W M/M Mobile	599.00	(—)
TS711	2M 25W Base Stn	940.00	(—)
TS711	70cm 25W Base Stn	1094.05	(—)
R2000	Gen Coverage HF/RX	599.00	(—)
VC10	118-174MHz Converter (R2000)	161.94	(2.50)
VC20	General Coverage HF/RX	167.21	(2.50)
B12	118-174MHz Converter (R5000)	11.86	(2.00)
DC31	DC Power Supply TH21/41	25.00	(2.00)
EB2	Ext. Battery Case TH21/41	6.77	(2.00)
HMC1	Headset with Vox TH21/41	32.91	(2.00)
PB21	Nicad Pack TH21/41	24.36	(2.00)
BCB	Desk Charger TH21/41	99.00	(2.50)
SC3	Soft Case TH21/41	11.86	(2.00)
SMC30	Speaker Mic TH21/42/600	25.31	(2.00)
MC50	4P Desk Mic	46.08	(3.00)
MC50A	8P Desk Mic	88.22	(3.00)
MC50B	Electric Desk Mic	53.88	(3.00)
MC85	Desk Mic Audio Level Comp	99.00	(3.00)
MC43	8P Fast Mic	22.22	(2.00)
MC35	4P Fast Mic	21.72	(2.00)
MC55	Mobile Mic (fibr Bp)	52.67	(3.00)
LF30	HF Low Pass Filter	32.26	(2.00)
KX2	Receiver ATU (Musho)	67.28	(3.00)
HS6	Lightweight Hphphones	24.36	(2.00)
HS2	Deluxe Hphphones	37.54	(2.00)
TS1400	HF 9 Band Gen. Cov. TX/RX	862.00	(—)
TS1400	270cm FM Dual band mobile SPECIAL	499.00	(5.00)

SWR/PWR Meters

WELZ	1.8 150MHz PWR/SWR	37.00	(3.00)
SP10X	1.8 200MHz PWR/SWR/PEP	99.95	(3.00)
SP225	140 525MHz PWR/SWR/PEP	59.95	(3.00)
SP425	140 525MHz PWR/SWR/PEP	119.95	(3.00)
SP825	1.8 200-430-800 1240MHz	169.95	(3.00)
HANSEN	130/440 MHz 20/200W	52.75	(2.50)
V70	3.5 150MHz 20/200W	42.75	(2.50)
FSSES			
SMCS 2U	2N 50239 Switch	18.95	(2.50)
SMCS 2N	2 way 1N 50239 Switch	22.50	(2.50)
Drae	3 way 50239 Switch	16.96	(2.50)
Drae	3 way 1N 50239 Switch	21.91	(2.50)
Kenpro KP21N	1 way Switch in Socket Deluxe	27.00	(2.50)
T30	30W Dummy load	10.29	(2.50)
T100	100W Dummy load	45.00	(3.00)
T200	200W Dummy load	65.00	(3.00)

Miscellaneous

2N 50239 Switch	18.95	(2.50)
2 way 1N 50239 Switch	22.50	(2.50)
3 way 50239 Switch	16.96	(2.50)
3 way 1N 50239 Switch	21.91	(2.50)
1 way Switch in Socket Deluxe	27.00	(2.50)
30W Dummy load	10.29	(2.50)
100W Dummy load	45.00	(3.00)
200W Dummy load	65.00	(3.00)

Dating Products

PC1	Gen. Cov. Con.	137.40	(2.50)
VLF	Very low frequency conv.	34.90	(2.50)
FL2	Multi-mode audio filter	89.70	(2.50)
FL3	Auto filter for receivers		
ASPB	1:1 speech clipper for Trio		
ASPB	1:1 speech clipper for Yaesu		
ASP	As above with 8 pin con		
D75	Manual RF speech clipper		
D70	Morse Tutor		
RFA	RF switched pre-amp		
AD270 MPU	Active dipole with mains p.s.u.		
AD270 MPU	Active dipole with mains p.s.u.		
DC114/28	2m converter		
DNF1423	Automatic notch filter		
ASB	Auto Woodpecker blanker		
SRB2	RF switched pre-amp		
RFA			

TX - 3 RTTY/CW/ASCII TRANSCEIVE

The high performance, low cost system

Split-screen, type-ahead operation, receive screen unwrap, 24 large memories, clock, review store, callsign capture, RTTY auto CR/LF, CW software filtering and much more. Needs interface or T.U. **BBC-B/Master** and **CBM64** tape £20, disc £22. **SPECTRUM** tape £35, +3 disc £37 inc. adapter board (needs interface/TU also).

See reviews Dec 87 & Jan 88 issues.

For **VIC20** we have our RTTY/CW transceive program. Tape £20.

RX - 4 RTTY/CW/SSTV/AMTOR RECEIVE

This is still a best-selling program and it's easy to see why. Superb performance on 4 modes, switch modes at a keypress to catch all the action. Text and picture store with dump to screen, printer or tape/disc. An essential piece of software for trawling the bands. Needs interface. **BBC-B/Master**, **CBM64** tape £25, disc £27. **VIC20** tape £25. **SPECTRUM** tape £40, +3 disc £42 inc. adapter board (needs interface also). The **SPECTRUM** software-only version (input to EAR socket) is still available £25, +3 disc £27.

TIF1 INTERFACE Perfect for TX3 and RX4, it has 2-stage RTTY and CW filters and computer noise reduction for excellent reception. Transmit outputs for MIC, PTT and KEY. Kit £15 (assembled PCB + cables, connectors) or ready-made £25, boxed with all connections. Extra MIC leads for extra rigs £3 each. State rig(s).

WORLD AND UK/EUROPE MAP LOCATOR Maps, great circles, distances, bearings, contest scores. Lat/long, locators, NGR, hundreds of placenames. **BBC-B/Master**, **ELECTRON** ONLY. Tape £10.

LOCATOR Distances, bearings, contest scores. Lat/long, locators. **SPECTRUM**, **CBM64**, **VIC20** tape £7.

And for **BBC-B/Master**, **SPECTRUM**, **ELECTRON**, **CBM64**, **VIC20**.

MORSE TUTOR 1-40 wpm. Learn by ear, practise using random letters, figures, punctuation, words. 40 plain language texts supplied or type your own. With learning guide, tape £6.

LOGBOOK Date, band, mode, call and remarks. Instant callsearch. Log printout. Tape £8.

RAE MATHS Unlimited practice and testing for the exam calculations. Tape £9.

All **BBC** and **CBM64** programs are available on **DISC** at £2 extra.

Prices include VAT and p&p, 1st Class inland, airmail overseas, normally by return. Eire, C.I., BFPO deduct 13%.

 **technical software (P.W.)**
Fron, Upper Llandwrog, Caernarfon LL54 7RF.
Tel. 0286 881886

LOSING DX?

ANTENNA TUNER for outside or **INDOOR** antennas, end-fed LONG WIRES or dipoles, **BOOST DX** and reduce interference 100KHz-30MHz in 6 overlapping ranges, **IDEAL** for FRG7700 etc. or 10W tx, **only £29.90**, hear **WEAK DX**.

V.L.F.? EXPLORE 10-150KHz, **Receiver £28.20**.

ANTENNA FAULT? Poor reports? Not getting out? CHECK FAST with an **ANTENNA NOISE BRIDGE**, measure RESONANCE 1-160MHz and RADIATION RESISTANCE 2-1000 ohms, simply null the noise, **only £26.20**, get **ANSWERS** and **MORE DX**.

Each fun-to-build kit (ready-made to order) includes all parts, case, instructions, by-return postage (Europe same, Giro 21.923.4000) etc. and list of other kits.

CAMBRIDGE KITS

45 (PD) Old School Lane, Milton, Cambridge.



NEW MONTHLY SHORTWAVE PUBLICATION

MONITORING TIMES is easily the best guide for expanding your radio listening horizons. It is the publication dedicated to providing full-spectrum coverage of both broadcasting and utilities communications **around the globe**. From VLF to microwave, BBC to satellites, law enforcement radio to pirate broadcasting, and aircraft to ships at sea, **MONITORING TIMES** consistently brings you the most up-to-date worldwide frequencies.

The last issues have covered how to tune into the shipping in the Gulf, radio astronomy, tropical DXing, Greenpeace's and the Swiss army's radio communications, and much, much more. Now available in the UK monthly, and subscription discount details are given in the magazine.

Price: Only £1.85 for UK, or £2.45 for Eire and overseas.

INTERBOOKS, PW488, Stanley, Perth PH1 4QQ. Tel: 0738-828575

CRICKLEWOOD ELECTRONICS LTD

It's no secret!



that there is a real difference at Cricklewood Electronics. That's why you should never be without the **FREE CRICKLEWOOD ELECTRONICS COMPONENTS CATALOGUE**, for sheer variety, competitive prices and service from the U.K.'s number one 100% component shop. No gimmicks, no gadgets or computers, just components, millions of them, all easily available by mail order, calling or credit card telephone orders. Just pick up the phone (or a pen) to get your **FREE** copy now (no SAE required). You have nothing to lose.

CRICKLEWOOD ELECTRONICS LTD.

40 Cricklewood Broadway NW2 3ET.

01-450 0995 & 01-452 0161

ALL MAJOR CREDIT CARDS ACCEPTED

Telex 914977 Phone or write today



TONNO F9FT THE VHF/UHF ANTENNA SPECIALIST

50MHz		435MHz	
20505 5 element	£41.69(a)	20909N 9 element	£28.62(a)
		20919N 19 element	£34.35(a)
144MHz		20438 19 element crossed	£39.66(a)
20804N 4 element	£27.60(a)	20921N 21 element 432MHz	£44.57(a)
20808N 4 element crossed	£34.96(a)	20922N 21 element ATV	£44.57(a)
20809N 9 element fixed	£30.87(a)		
20809N 9 element portable	£33.12(a)	1296MHz	
20818N 9 element crossed	£37.86(a)	20623 23 element	£30.36(b)
20813N 13 element portable	£46.00(a)	20696 4 x 23 element - power	£160.00(a)
20817N 17 element	£61.54(a)	splitter - stacking frame	
144/435MHz		20655 55 element	£46.20(a)
20899N 9 & 19 element Oscar	£57.86(a)	20666 4 x 55 element - power	£230.00(a)
		splitter - stacking frame	

All prices include VAT. Please add carriage (a) £5.00. (b) £2.20.
ACCESS or VISA cardholders telephone your order - immediate despatch.
Callers welcome but by telephone appointment only please.
SEND 50p FOR OUR CATALOGUE WHICH CONTAINS FULL SPECIFICATION OF ALL OUR ANTENNAS, POWER SPLITTERS, STACKING FRAMES, COAXIAL CABLES ETC.

SOLE UK DISTRIBUTOR
RANDAM ELECTRONICS (P)

12 Conduit Road, Abingdon,
Oxon. OX14 1DB.
Tel: (0235) 23080 (24 hours)

VALVES

*High Quality Prices correct as at 20/8/1987
 **Very High Quality but may fluctuate. 15% VAT incl.

A1065	1.40	EBF89	0.80	EY51	0.90	PFL200	1.10	UBF89	0.70
A2303	2.00	EC	0.65	EF86	1.45	PFL200*	2.20	UCC84	0.85
A2300	12.75	EC31	4.40	EF89	1.60	PL26	1.10	UCC85	0.70
AR8	1.15	EC32	1.85	EF92	2.15	PL81	0.85	UCH42	2.50
ARP3	1.15	EC81	0.95	EF95	0.95	PL82	0.70	UCH81	0.75
ARP25	0.70	EC82	0.95	EF96	0.60	PL83	0.60	UCL82	1.60
ATP4	0.90	EC83	0.80	EF183	0.70	PL84	0.90	UF41	1.85
B12H	6.90	EC84	0.60	EF184	0.75	PL50A	1.25	UF80	1.60
CY31	1.40	EC85	0.75	EF812	0.75	PL50B	2.00	UF85	1.20
GA70	1.75	EC88	1.10	EF200	1.85	PL509	5.65	UL84	0.95
DAF86	0.90	ECC189	0.95	EH94	0.85	PL519	0.95	UM80	0.90
DEF22	32.80	ECC804	0.65	EL32	0.85	PL802SE	3.45	UM80*	1.60
DF82	0.65	EC180	0.95	EL34	3.25	PL802	0.70	UM84	0.70
DF96	0.85	EC182	0.95	EL34*	5.15	PL81800	0.85	UY82	0.70
DH76	0.75	EC1802	1.80	EL82	0.70	PL82	0.75	UY85	0.85
DL92	1.85	EC182	1.20	EL84	1.35	PL88	0.60	VR105/30	1.45
DY86/87	0.65	EC181	0.70	EL86	0.95	PL900A	2.10	VR150/30	1.80
DY802	0.70	EC184	0.80	EL90	1.75	PL900B	5.95	XS1M	1.70
E20CC	2.80	EC180	0.65	EL91	6.50	QDV03/10*	7.50	X66	1.80
E180CC	11.50	EL82	0.75	EL95	1.80	QDV03/20A	27.50	Z149	0.75
E1148	0.58	EL85	0.75	EL504	2.70	QDV06/40A	28.50	Z159	19.00
EA76	1.60	EL86	1.10	EL509	5.85	QDV06/40A*	49.50	Z800J	3.45
EB34	0.70	EL88	1.10	EL519	7.70	QDV07/12	5.95	Z801J	3.75
EB91	0.60	EL92	3.50	EL821	8.45	PL82	0.95	SP61	21.15
EB33	1.85	EL93A	2.15	EL822	9.95	PL84	0.85	TT21	37.50
EB30	0.30	EL90	0.65	EL180SE	4.50	PL86	0.80	TT22	37.50
EB31	0.30	EL90	0.65	EL180SE	4.50	PL86/85	0.75	LA4	0.65
EB80	0.95	EF85	0.60	EM87	3.00	PD500/510	4.30	UBF85	2.70

VALVES AND TRANSISTORS Telephone enquiries for valves, transistors, etc. Retail 749 3934, trade and export 743 0899

POSTAGE: £1-£3 5p; £3-£5 5p; £5-£10 8p; £10-£15 £1.05; £15-£20 £1.60. Minimum order £1.00. Delivery by return.

COLOMOR (ELECTRONICS LTD.) 170 Goldhawk Rd, London W12
 Tel: 01-743 0899 or 01-749 3934. Open Monday to Friday 9 a.m.-5.30 p.m.

Books for radio amateurs

AERIAL ACCESSORIES AND MASTS

GO!

ELLIOTT ELECTRONICS

for the Radio Enthusiast

APPOINTED DISTRIBUTOR

JAYBEAM AMATEUR ANTENNAS

RIGS, ANTENNAS, SWR BRIDGES, POWER SUPPLIES, TEST GEAR, COMPONENTS, MORSE KEYS, COAXIAL CABLES, ROTATORS, MICS, PLUGS AND SOCKETS, SWITCHES

Call us on (0533) 553293

OR COME AND LOOK AROUND AT

26/28 Braunstone Gate, Leicester

COMMUNICATION CENTRE OF THE NORTH

The largest range of communications equipment available in the North. Full range of receivers, transceivers, antennas, power supplies, meters. Ali tubing - wall brackets - rotators - insulators.

ANTENNA RANGE

BUTTERNUT

HF2V 40-80m vertical	£142.00
20 MRK 20m add on kit	£33.49
HF6VX 6 band vertical	£159.00
TBR160S 160m Add on kit	£53.99
HF4B Triband Mini Beam	£235.00

CUSHCRAFT

A3 3 element Tribander	£262.00
A4 4 element Tribander	£350.00
10-3CD 3 element 10m	£115.00
15-3CD 3 element 15m	£139.75
20-3C2 3 element 20m	£238.00
AP8 8 band 25ft vertical	£164.00
AV5 5 band 25ft vertical	£123.00
18 element 2m Boomer	£106.00
15 element 2m Boomer	£85.00

ANTENNA TUNERS

Kenwood AT230	£20.00
CAPCO SPC 300D	£225.00
CAPCO SPC 3000D	£325.00
MFJ 962B 1.5k Tuner	£241.00
MFJ 949C 300W Versatuner	£157.00
MFJ 941D watt Basic	£105.00
MFJ 1601 Random Wire Tuner	£42.02
Kenwood AT250 Automatic	£366.00

GSRV full size £16.50, half size £14.50 Full range of Antenna - Accessories plus full range of VHF -

UHF - HF mobile Antennas

Full range of RSGB and ARRL publications in stock.

Part Exchanges welcome. Second hand lists daily.

Send S.A.E. for details of any equipment.

HP terms. Access/Barclaycard facilities.

Open 6 days a week. 24 Hour Mail Order Service.

Goods normally despatched by return of post.

Phone 0942-676790.

STEPHENS JAMES LTD.

47 WARRINGTON ROAD,
 LEIGH, LANCS. WN7 3EA.

ARE COMMUNICATIONS

A NEW STANDARD IN TECHNOLOGY

THE FULL DUPLEX HANDIE FROM STANDARD

A World First. Transmit on 2 metres and receive on 70cms (or vice-versa) at exactly the same time. Not only is that unique from a Handie, but with the following specification and at a fraction of the size of it's nearest competitor, is there really any other rig that compares?

- Dual band operation 144-146 and 430-440MHz, Full duplex.
- Receiver coverage: 130-169,995 and 410-470MHz.
- Programmable step sizes 5/10/12.5/25/50KHz.
- 5 watts output on both bands (With optional CNB120).
- Dual synthesised VFO's.
- Programmable ctcss tones 67-250.3Hz (With optional CTD/N500).
- Programmable Repeater Offset on either band between 0-39.9MHz.
- Reverse Repeater facility.
- Dual Watch priority channel.
- Programmable Call Channel on both bands.
- Ten programmable memories, including repeater offset, tone squelch etc, on both bands.
- Four different scanning modes.
- Battery save facility.
- Switchable Frequency lock and TX inhibit, from keyboard.
- Switchable 20dB Attenuator.
- High or Low power control.
- Squelch defeat switch.
- Illuminated Wide Angle L.C.D. display.
- Digital 'S' Meter/Power output display.
- Low battery Warning indicator.
- TX LED indicator.

UP GRADE NOW.
 THE NEW STANDARD C-500.
New price £369

Opening Hours London Mon/Fri 9.30 to 5.30
 Merseyside Tues/Sat 10.00 to 5.00



A.R.E. Communications Limited, 6 Royal Parade,
 Hanger Lane, Ealing, London W5A 1ET, England
 Professional Tel:01-997 4476 Fax:01-991 2565 Telex:94016185 AREC G

A.R.E. Communications Limited, 38 Bridge Street,
 Earlestown, Newton-Le-Willows, Merseyside WA12 9BA
 Amateur Tel:09252 29881 Fax:01-991 2565 Telex:94016185 AREC G



Bredhurst electronics



SITUATED AT SOUTHERN END OF M23 — EASY ACCESS TO M25 AND SOUTH LONDON

HF RECEIVERS	£	(c&p)
Icom ICR71	825.00	(—)
Kenwood R2000	595.00	(—)
Kenwood VC10 V.H.F. Converter	161.94	(2.00)
Kenwood R5000	875.00	(—)
Yaesu FRG8800	639.00	(—)
Yaesu FRV8800 V.H.F. Converter	100.00	(2.00)
Low HF125	375.00	(—)

HF TRANSCEIVERS	£	(c&p)
Kenwood TS940S	1995.00	(—)
Kenwood TS930S	1695.00	(—)
Kenwood TS440S	1138.81	(—)
Kenwood TS140S	862.00	(—)
Kenwood TS830S	1098.00	(—)
Kenwood TS530SP	748.00	(—)
Yaesu FT980	1785.00	(—)
Yaesu FT757GXII	969.00	(—)
Yaesu FT767GX	1550.00	(—)
Icom IC735	949.00	(—)
Icom IC751A	1465.00	(—)

V.H.F. SCANNING RECEIVERS	£	(c&p)
Icom ICR7000	957.00	(—)
Yaesu FRG9600M 60-950MHz	509.00	(—)
A.O.R. AR2002	487.30	(—)
Signal R535 "Airband"	249.00	(—)
Sony Air 7 handheld	249.00	(—)
Sony PRO 80 New Sony Receiver	349.00	(—)

V.H.F. SCANNER ACCESSORIES	£	(c&p)
A.K.D. HFC1 HF Converter	49.00	(1.00)
Revcone Discone Antenna 30-500MHz	32.16	(3.00)
Icom AH7000 Antenna 25-1300MHz	82.00	(3.00)

ANTENNA TUNER UNITS	£	(c&p)
Yaesu FRT7700 Short wave listening	59.00	(2.00)
Yaesu FC757AT	349.00	(—)
Kenwood AT230	208.67	(2.50)
Kenwood AT250 auto	366.00	(—)

2.M. TRANSCEIVERS	£	(c&p)
Kenwood TH21E Handheld	189.00	(—)
Kenwood TR751E 25W multimode	599.00	(—)
Kenwood TS711E base station	940.00	(—)
Kenwood TH205E Handheld	215.26	(—)
Kenwood TH215E Handheld	252.13	(—)
Kenwood TW41000E 2m/70cm FM Mobile	499.00	(—)
Kenwood TM221ES 45W Mobile	317.00	(—)
Kenwood TH25E Handheld. New Model	£258.00	(—)
Yaesu FT290II Portable multimode	429.00	(—)
Yaesu FT23R + FNB10 Handheld	253.50	(—)
Icom IC2E Handheld	225.00	(—)
Icom IC02E Handheld	299.00	(—)
Icom IC28E 25W mobile	359.00	(—)
Icom IC271E base station	835.00	(—)
Icom IC3200E 2m/70cm FM mobile	556.00	(—)
Icom Micro II Handheld	239.00	(—)

70cm TRANSCEIVERS	£	(c&p)
Kenwood TH41E Handheld	218.00	(—)
Kenwood TS811E base station	1094.05	(—)
Kenwood TH405E Handheld	273.18	(—)
Kenwood TH415E Handheld	298.85	(—)
Kenwood TM421ES 35W Mobile	352.84	(—)
Yaesu 70cm module for FT726R	349.00	(—)
Yaesu FT73R + FNB10 Handheld	273.50	(—)
Icom IC4E Handheld	285.00	(—)
Icom IC04E Handheld	299.00	(—)
Icom IC471E base station	927.00	(—)

STATION ACCESSORIES	£	(c&p)
MC 50 Desk Microphone	46.08	(2.00)
MC 60A Desk Microphone with Pre-amp	88.22	(2.00)
MC 55 Mobile Microphone with Control Box	52.67	(1.00)
MC 35S Hand Microphone 4 pin	21.72	(1.00)
MC 40S Up/down Hand Microphone 6 pin	19.07	(1.00)
MC 43S Up/down Hand Microphone 8 pin	22.22	(1.00)
SMC 30 Speaker Microphone TH21	28.31	(1.00)
LF 30A Low Pass Filter 1kW	32.26	(2.00)
SP 40 Mobile Speaker	21.06	(1.00)
HS 7 Miniature Headphones	15.80	(1.00)
HS 6 YH77 Light Deluxe Headphones	19.99	(1.00)
HS 5 Deluxe Headphones	37.54	(1.00)
HMC 1 Headset with Vox TH21 etc.	32.91	(1.00)
VS 1 Voice Synthesizer Module	32.26	(1.00)
GC5 Icom World Clock	43.00	(2.00)
CD600 CW/RTTY Decoder	215.14	(2.50)
KPC2 Kantronics Packet Communicator	159.00	(2.50)
Kent Morse Key Kits	29.50	(2.50)
Kent Twin-Paddle Morse Key Kits	38.50	(2.50)

ANTENNA BITS	£	(c&p)
HI-Q Balun 1:1 5kW P.E.P.	13.95	(1.50)
Bricomm Balun 4:1 1kW	11.20	(1.50)
Bricomm 7.1MHz Epoxy Traps (pair)	9.95	(1.50)
Self Amalgamating Tape 10m x 25mm	4.25	(0.75)
T-piece polyprop Dipole centre	1.60	(0.25)
Small ceramic egg insulators	0.65	(0.20)
Large ceramic egg insulators	0.85	(0.20)

STOP PRESS... PRICE REDUCTION
KENWOOD TW41000E
FM DUAL BANDER
REDUCED TO £499.00

CABLES ETC.	£	(c&p)
URM67 low loss coax 50 ohm	per metre 0.75	(0.25)
UR76 50 ohm coax dia. 5mm	per metre 0.30	(0.10)
UR70 70 ohm coax	per metre 0.35	(0.10)
UR95 50 ohm coax dia. 2.3mm	per metre 0.40	(0.10)
4mm Polyester Guy Rope (400kg)	per metre 0.25	(0.10)
50mtrs. 16 swg hard drawn copper wire	6.95	(1.50)
75ohm Twin feeder light duty	per metre 0.20	(0.10)
300ohm Slotted ribbon cable	per metre 0.32	(0.10)

GOODS NORMALLY DESPATCHED WITHIN 24 HRS - PRICES CORRECT AT TIME OF GOING TO PRESS - E&OE - MAIL ORDER AND RETAIL

BREDHURST ELECTRONICS LTD HIGH ST, HANDCROSS, W. SX. RH17 6BW (0444) 400786

K W TEN-TEC LTD

TRANSCEIVERS **HF MOBILE WHIPS**
CORSAIR II Helium-filled
ARGOSY II
CENTURY 22
*PARAGON **AIRBAND WALKIE-TALKIES**
CAA Approved

LINEAR AMP **DUMMY LOADS**
TRITON **MICROPHONES**
ANTENNA TUNER **FILTERS, REMOTE VFO**
MODEL 229A etc

*We now have many delighted customers using the new PARAGON

K W TRAPS, K W TRAP DIPOLES, BALUNS, ANTENNA SWITCH, PRECISION MORSE KEYS

LATEST NEWS FROM K W

FRITZEL BALUNS, H.F. BEAMS & VERTICALS NOW IN STOCK
FROM CUSHCRAFT, BUTTERNUTT, HYGAIN,
MFJ PACKET RADIO UNITS AND ATU's etc
HYGAIN ROTATORS, VHF BEAMS & VERTICALS

Prices on many products from U.S.A. have been reduced due to favourable rate of exchange (including TEN TEC Equipment and ancillaries).


K W TEN-TEC LTD
(A subsidiary of K W COMMUNICATIONS Ltd)

Vanguard Works

Jenkins Dale, Chatham, Kent ME4 5RT
Tel: (Medway) 0634-815173; Telex: 965834

J & M (Amateur Radio) G4GKU

36, WESTGATE, ELLAND,
W. YORKS HX5 0BB.
PHONE: (0422) 78485
Ask for John G4GKU



NOW 10m, 15m, 20m

A TRI-BAND MINI BEAM
AT A SENSIBLE PRICE

£69.95

(TRADE ENQUIRIES WELCOME)

Direct from the manufacturer at a money saving **£69.95** complete. Or in kit form or as spare parts. Ask for a quote.

PART EXCHANGE
BARCLAYCARD VISA



**NO
DEPOSIT
FINANCE**

Just What is AMCOMM's Painless, Payless Credit?

Read Below

Just think – you can now take delivery of the latest state-of-the-art transceiver/receiver, or many other items from our stock with no deposit! **Yes, that's right NO DEPOSIT!** We at AMCOMM want you to enjoy the very best in Amateur Radio, but in a way that you can afford. We've now eliminated the deposit and you have 2 or even three years to pay.* This is AMCOMM's painless, payless credit, really working for you – another dream deal from Amcomm – where a good deal more costs a good deal less!

No snags, no catches, no hidden extras, nothing added. Just take a look at some examples:

FT 757 (Compact HF Multimode TCVR) 24 payments of **£49.40** per month

FRG 8800 (High quality gen. cov. RCVR) 24 payments of **£32.58** per month

FT 767 GX (HF/VHF/UHF All Mode TCVR) 24 payments of **£79.04** per month

FT 23 R (with FNB 10) (2m micro handy) 24 payments of **£12.56** per month

FT 727 R (Dual band handy) 24 payments of **£21.64** per month

IC 735 (Compact HF Multimode) 24 payments of **£48.38** per month

IC 751 A (HF Transceiver Multimode) 24 payments of **£74.67** per month

IC 275 E (2m base 25W) 24 payments of **£52.98** per month

ICµ2 E (2m mini handy) 24 payments of **£12.18** per month

IC 290 D (2m Multimode) 24 payments of **£27.59** per month

*subject to status

PLUS... MANY MORE...

Amcomm
of London

SUPER H.P. TERMS AND TRADE-IN SERVICE

**CASH IN NOW, ON OUR HUGE BUYING POWER! ENORMOUS STOCKS
WHERE A GOOD DEAL MORE COSTS A GOOD DEAL LESS!**

373 Uxbridge Road, London W3 9RN, Tel: 01-992 5765

Showroom and Shop opening hours 9.30-5.00pm – Closed Mondays

Fax: 01-861 2591 Telex: 24263



E & O E





Old Times

Two items in the February issue spurred me on to write to you to suggest a subject worthy of *Practical Wireless*. "Battle of the Beams" showed us how "practical" the professionals had to be, and "Cheque Books and Black Boxes" reminds us how "impractical" most of us are becoming, due to a

few damned clever bits of imported hardware.

Could we please have, before it's too late, an article about the construction of receivers from junk and household items. I have heard of the bully-beef tin and bent-spoon receivers but did they exist, did they work, or were they occupational therapy for prisoners of war?

Perhaps the article could be followed by a constructional competition with two categories: (a) a working receiver on 198kHz made from household items available back in 1940. (b) a working receiver tuneable between 500kHz and 1800kHz using present-day household items. No

"radio" components should be used in either category.

The object of the article should not be an attempt to turn the clock back, but should be to show us how those practical wireless men solved their problems, and help us to become modern practical wireless persons.

Finally, could we all bear in mind that when we buy imported gear, our brothers, aunts, uncles and fathers are not being employed in manufacturing it. How about *PW* publishing a British products directory, and maybe giving preferential advertisement rates for British products?

I. R. Willson
Epsom

Patience

In the January 1988 issue of *PW*, Chris Charles said that he was sure that the delay between taking an interest in amateur radio and finally obtaining a licence must put a lot of people off — "but perhaps that is the object of the exercise".

What a load of rubbish. I have to save and wait for my holidays but I still go! Many enjoy fishing and may wait for hours or even days to catch what they consider to be the reward for sticking with it.

The attitude of something for nothing is not the way forward, or does Mr Charles not conform to any system he may not agree with.

Bernard Prewitt G0FIR
Carterton, Oxon

The Way In

Oh dear, I think that Chris Charles (Letters *PW* January 1988) has a gross misconception of what amateur radio is all about. Referring to his final paragraph, despite the usual delays in the City and Guilds examination system, the time taken to obtain a licence is largely related to the amount of study required by the syllabus. It is not a ploy on the part of the system to put prospective amateurs off.

Mr Charles' comments are a little contradictory in nature. If we are to assume

that his idea of an examless licence were introduced, this would require him to buy commercial equipment which is very expensive. Surely he would not be willing to spend in excess of £400–£500 on what was just a fleeting interest. If it is more than this, surely a few months of study is little enough sacrifice when it can lead to a rewarding and satisfying hobby lasting many years.

Assuming this previous situation, he would be limiting this hobby to those rich folk who could afford to buy equipment, and

excluding the majority who could not. But with more knowledge, they could perhaps have built their own.

The RAE (in theory, at least) gives a sound background knowledge of the principles involved. This is the basic difference between CB and amateur radio. CB is a user service, as are the public telephone and television systems. They assume no technical knowledge or ability, so everything is couched in terms of non-interference with the system by the user. In amateur radio, we are privileged to use facilities

which may cause interference to others, so it is necessary for all concerned to be conversant with the basics, and how to resolve interference problems, even if they only ever intend to use 2m f.m.

The "B" licence is a novice licence with all modes now being available on the permitted bands without the requirement of a Morse test. Which do you honestly want: 100 crowded f.m.-only channels for nothing, or the freedom of amateur radio for the sake of a few months of study?

Jon Carp GM8XFT, QTHR

PW COMMENT

It's a Date!

I NOTICED in a recent copy of *IARU Region 1 News* an item headed "Expression of Dates on QSL Cards" which read as follows.

The following Resolution from the 1986 Region 2 Conference was discussed at the Noordwijkerhout Conference and referred to the next meeting of the IARU Region 1 HF Committee for consideration: "It is resolved that Region 2 adopt a Recommendation to all amateurs to use the convention of expressing dates on QSL cards with sets of two-digit numbers in the order YEAR/MONTH/DATE, as for example 86/12/31, and that the Executive Committee should inform the Administrative Council and Regions 1 and 3 to propose that this standard procedure be adopted worldwide."

Now International Telecommunication Union (ITU) Region 2 covers the Americas, where traditionally dates have always been expressed in the order MONTH/DATE/YEAR, much to the confusion of those countries following the UK system of DATE/MONTH/YEAR. Now, it is proposed that we adopt yet another system as a new worldwide standard. To quote a well-known American, "You cannot be serious, man!"

The Novice Question

THE NOVICE LICENCE QUESTION, raised by Chris Charles of Cheadle in our January issue, provoked one of our largest ever mailbags on a single topic. This was not entirely unexpected, but we did get an interesting cross section of views. Space simply does not allow us to print them all, but I have tried to include a representative selection last month and this.

The letters certainly proved the near-impossibility of producing an idea which will please all radio enthusiasts. Their individual interests and views are so varied, ranging from the ex-service radio operators who love Morse operating and would love to get back on the air, but are apprehensive of the technical examination, to those who are interested in experimenting in h.f. radio but find the Morse requirement terrifying, or those who would just like to chat with people in other countries but don't want to bother with either the Morse or the technicalities.

Any government department or representative body trying to put together a proposal for a change in the structure of amateur licensing has my sympathy—they're on a hiding to nothing!

Geoff Arnold

Safe Operation

In his letter in January *PW*, Mr Charles' assertion that a knowledge of radio theory is unnecessary to operate a modern transceiver is correct. The knowledge of radio theory is required to ensure its successful, interference free, safe operation in a domestic environment, since the acquisition of radio theory knowledge usually involves an elementary understanding of electrical and antenna safety. I would certainly stay well clear of a station of 100 watt capability if its operator had only the equivalent of a "driving test", having seen the results of ignorance of elementary precautions and knowledge.

In respect of the RAE, I believe G1ZEH will find this is a general problem — look at the teletext pages for some classic howlers — and could really only be solved by continually raising standards.

Finally, despite the criticisms, the RSGB is the only national body

representing amateur radio in this country: it is the only recognised negotiating body for frequency allocations and licence conditions, and is the only real forum for general amateur radio interests (I do not include the various special interest groups). As such, though there may be many deficiencies, it requires our support. Without it we would all be far worse off.

**P. J. Brent G4LEG
Crawley**

Priorities

I am not in the least interested in the forthcoming 75th year celebrations which have been given much publicity in *Radio Communication*. Unless, of course, these celebrations which will be enjoyed by a few, will not be found to be an expensive charge on the membership as a whole.

On the other hand, I am much interested in what our National Society are doing about the DTI's report of March 1987 which recommended that pressure be brought to avoid further increases in amateur band

allocations, or even to reduce these. As I have read, the RSGB were invited to comment by June 30 last. This they did not do.

Perhaps the RSGB, who I note have made strenuous efforts to present a more acceptable image to the membership these past twelve months, should spend more time concerning themselves with the DTI report rather than the 75th year celebrations. Otherwise we will find ourselves in a position where we have nothing to celebrate.

**V. J. Copley-May G3AAG
Petersfield**

Towards a kW?

Do we really want a 1 kilowatt amateur licence? The RSGB seems to think so. Their "21st Century Licence", *Radio Communication*, September 1987, page 667, paragraph

35, calls for a power limit of 30dBW, which is 1kW—or perhaps we should say 0dBk.


Those amateurs who already under-run linears would have a temporary advantage while the rest save up to buy one—just to restore the DX:QRM ratio. However, it is not just the cost of the linear, but also the cost of dispensing TVI filters to an even wider neighbourhood. You could escape TVI by going mobile, but beware, an oncoming driver may be using a cardiac pacemaker! Perhaps the QRP boys will have to increase their limit from 5W to 12.5W "in line with inflation".

Oh for the days when you could contact the other side of the world with a few watts, on 27MHz of course.

**M. Mann G4FFO
Cambridge**

Send your letter to the Editorial Offices in Poole, the address is on our Contents page. Writer of the Star Letter each month will receive a voucher worth £10, to spend on items from our PCB or Book Services, or on *PW* back numbers, binders, reprints or computer program cassettes. And there's a £5 voucher for every other letter published.

Letters must be original, and not duplicated to other magazines. We reserve the right to edit or shorten any letter. Brief letters may be filed via our Prestel Mailbox number 202671191. The views expressed in letters are not necessarily those of *Practical Wireless*.



OUR SERVICES

QUERIES

We will always try to help readers having difficulties with a *Practical Wireless* project, but please observe the following simple rules:

1. We cannot give advice on modifications to our designs, nor on commercial radio, TV or electronic equipment.
2. We cannot deal with technical queries over the telephone.
3. All letters asking for advice must be accompanied by a stamped, self-addressed envelope (or envelope plus International Reply Coupons for overseas readers).
4. Write to the Editor, "Practical Wireless", Enefco House, The Quay, Poole, Dorset BH15 1PP, giving a clear description of your problem.
5. Only one project per letter, please.

COMPONENTS, KITS AND PCBs

Components for our projects are usually available from advertisers. For more difficult items, a source will be suggested in the article. Kits for our more recent projects are available from CPL Electronics, and from FJP Kits (see advertisements). The printed circuit boards are available from our PCB SERVICE (see page 44 of this issue).

CONSTRUCTION RATING

Each constructional project is given a rating, to guide readers as to its complexity:

Beginner

A project that can be tackled by a beginner who is able to identify components and handle a soldering iron fairly competently.

Intermediate

A fair degree of experience in building electronic or radio projects is assumed, but only basic test equipment is needed to complete any tests and adjustments.

Advanced

A project likely to appeal to an experienced constructor, and often requiring access to workshop facilities and test equipment for construction, testing and alignment. Definitely not recommended for a beginner to tackle on his own.

BACK NUMBERS AND BINDERS

Limited stocks of most issues of *PW* for the past 18 years (plus a few from earlier years) are available at £1.30 each, including post and packing to addresses at home and overseas (by surface mail).

Binders, each taking one volume of *PW* are available Price £3.95 to UK addresses, or overseas, including post and packing. Prices include VAT where appropriate

CLUB NEWS

If you want news of radio club activities, please send a stamped, self-addressed envelope to Club News, "Practical Wireless", Enefco House, The Quay, Poole, Dorset BH15 1PP, stating the county or counties you're interested in.

ORDERING

Orders for p.c.b.s., back numbers and binders, *PW* computer program cassettes and items from our Book Service, should be sent to PW Publishing Ltd., FREE-POST, Post Sales Department, Enefco House, The Quay, Poole, Dorset BH15 1PP, with details of your credit card or a cheque or postal order payable to PW Publishing Ltd. Cheques with overseas orders must be drawn on a London Clearing Bank.

Credit card orders (Access, Mastercard, Eurocard or Visa) are also welcome by telephone to Poole (0202) 678558. An answering machine will accept your order out of office hours.

SUBSCRIPTIONS


Subscriptions are available at £14 per annum to UK addresses and £18.50 overseas. For further details, see the announcement on page 56 of this issue. Airmail rates for overseas subscriptions can be quoted on request.

Weather Package

ICS Electronics have put together a low-cost package for weather facsimile, Navtex and radio teletype reception.

For £399.95 (including VAT) you get an enhanced FAX-1 decoder, a mains power supply, an Epson compatible printer, all connecting leads, paper and ribbon.

All you have to do is connect the package to any h.f. s.s.b. communications receiver and you should be able to get weather maps, satellite cloud pictures and navigational warnings from

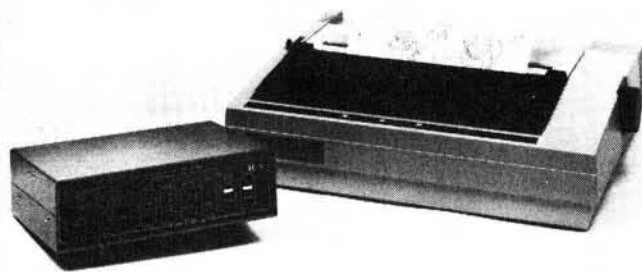

all round the globe.

The FAX-1 incorporates a built-in tuning indicator and timer and is fully automatic

in operation.

For more details, ring:
Alan Clemmetsen.
024 365 590.

75th Celebrations

The RSGB have quite a few events planned to celebrate their 75th Anniversary. On **July 15-17** it's the National Radio Exhibition at the NEC, Birmingham. This has, by now, become a very well known event in the radio amateur's calendar, but note it's during the summer this year and not the spring as usual. It will be a "bigger and better" event than previous years with a larger trade exhibition. There will also be an exhibition of amateur radio through the ages.

There will be various social events held during the evenings of the exhibition, either in the grounds or in one of the nearby halls—depending on the weather. They have arranged accommodation "packages" with the Metropolitan Hotel, which can be either for all three days or on a daily basis. You will also be able to purchase a package ticket for all the events or daily tickets, whichever suits you most.

There will be a special 75th Anniversary luncheon on the first day of the exhibition and members can purchase these tickets on a first come first served basis.

On **July 18** the RSGB Headquarters will be closed, giving them a chance to return and re-install equipment taken from HQ, for use at Birmingham. **July 19-21** will be HQ open days when there will be guided tours of the operations

there, as well as displays of archive material and of old amateur radio equipment. Tickets for this are free, but again on a first come first served basis, although you don't have to be a member to get tickets, RSGB members will get priority. They will have the HQ station running during these three days when visitors will be able to operate using the very special callsign of **GB75RS**. Opening hours will be 10am to 4pm, and during all this they are still intending to keep the HQ running and keep the work up together!

Then, on **July 22-23** there will be a Data Communications Symposium at the Historic Harrow School. There will be lectures and demonstrations of all types of data comms as used in amateur radio. It's the first chance that all the various data communications groups have had to get together for discussion. Tickets can be bought in various options, either a 2-day package which includes accommodation, food and entry; day tickets can be bought in advance and these include tea, coffee and lunch; and entry on tickets can be purchased at the door which includes entry and tea and coffee.

The next event is really quite unusual, **July 24** is a Families Day, when the individual affiliated radio clubs and societies will take over. Just about anything goes as long as it includes

the family in amateur radio and there will be a prize for the club who dreams up the most unusual event. The RSGB HQ are hoping to involve RAYNET in another exercise like Operation Hilltop, where they will pass 75th Anniversary greetings messages around the country.

Onto **July 28**, when there will be an International Satellite Seminar near Guildford. This will be by invitation only and is very much an international event. Satellite builders, designers and engineers will gather to exchange information and views. The AMSAT Colloquium will take place on **July 29-31** and, as usual, the booking for this event will be handled by Ron Broadbent. The meeting during the day of the 29th is a technical meeting for engineers and is by invitation only, the social event that evening heralds the start of the open session.

Booking forms for most of these events will appear in the April/May copies of *Radcomm*, overseas visitors should contact the RSGB HQ for an information pack.

There should be a 75th Anniversary Award available too for working either: (i) The HQ Station **GB75RS** and 75 RSGB members or (ii) 5 special GB stations put on for the anniversary and 75 RSGB members. You can apply for the award of h.f. and/or v.h.f. but **not** mixed. Again full details will be *RadCom* later.

Short-form Guide

A new short-form guide for "Surface Mounted Discrete Semiconductors" is now available from Mullard Ltd. It gives full details on all aspects of the subject.

Mullard offers a most extensive range of discrete semiconductors in surface mounted encapsulations. The range includes general purpose, field effect, high frequency and Darlington transistors as well as Zeners and variable capacitance diodes.

The guide gives details of outlines, dimensions, marking codes, electrical data, SMD/conventional type equivalents, packing, ordering information, etc.

Mullard Ltd.
Mullard House,
Torrington Place,
London WC1E 7HD.

Special Event Stations

GB75RS: This station is already operating from the HQ. There are no published schedules or frequencies as it appears on air only when HQ staff have the spare time. As time goes on and more visitors turn up then the station should be heard a lot more.

GB0LBL: This station is being run by the Port Sunlight Centenary Radio Station. It is to celebrate the centenary of Port Sunlight as the home of Lever Brothers Ltd. The station will operate from the Gladstone Hall, within the Port Sunlight Village, during the weekend of March 18-20. They will be using 3.5, 7, 14, 144 and 430MHz in addition to Packet radio on 144MHz.

Various charities will benefit from sponsorship for all QSL cards received within one month of the event. All the cards received will be entered into a grand draw for a bumper pack of Lever products. More information from: **Eric Gethin G6HWD, QTHR.**

GB2SWR: This will be used as the talk-in station for the Swansea Mobile Rally at the Swansea Leisure Centre on April 24.

GB5RN: The Royal Naval ARS London (HMS Belfast)

Test Equipment Brochure

A free 10-page brochure outlining a comprehensive telecommunications test capability available from a single source has been produced by Megger Instruments Limited.

The brochure embraces testers for relatively simple line measurements through to cable fault location, power disturbance analysis, chart recording and testing the power loss in optical fibre networks.

All the instruments featured conform to international and British safety standards (BS4737 or BS5458). Each product description is supported by a detailed specification and the brochure also contains a wealth of illustrations.

A brochure is available from:

**The Sales Department,
Megger Instruments Ltd.,
Archcliffe Road,
Dover,
Kent CT17 9EN.**



The RZ-1

The new Kenwood wide band receiver, the RZ-1, is a multipurpose receiver that covers the 500kHz to 905MHz range. There are 100 easy-to-operate multi-function memory channels with message capability. They can store frequencies with messages and band marks for convenience and operating ease. A message with a maximum of 7 letters and numbers can be memorised. Six different band marks can be selected

and memorised.

There is a 10-band program capability, keyboard selection, auto-mode and auto-stop operations, multi-scan functions, it has a large easy-to-read liquid crystal display and has two different antenna sockets.

For more details of the RZ-1, contact:

**Lowe Electronics Ltd.
Chesterfield Road,
Matlock,
Derbys DE4 5LE.
Tel: 0629 580800**

Dalgety Flier

British Telecom International have helped keep microlight pilot Brian Milton in touch during his historic flight to Australia.

During the 19 000km journey from London to Darwin, Mr Milton has relied on BTI's Portishead Radio Station in Somerset to provide a link with home.

BTI radio officers assisted in preparations for the flight by advising on how to make maximum benefit of the extremely lightweight and compact radio equipment fitted into his *Dalgety Flier* microlight aircraft. The h.f. equipment on board is approximately half the size of a typical flight deck h.f. transceiver.

In the past, Portishead's aeronautical service has provided vital communications links for pilots involved in famine relief operations, and the service has handled calls from as far away as the South Pole.

Group will be active from Thursday March 17 to Wednesday April 13. This is to celebrate the fiftieth anniversary of the launch of HMS Belfast. A special QSL card will be issued, all QSLs via the RSGB or Derek Costello G4UKJ, Three Ways, The Green, Stalham, Norfolk NR12 9PZ. Requests for direct QSLs must be accompanied by s.a.e. and return postage. The correct address of the ship is **HMS Belfast, Imperial War Museum, Off Morgans Lane, Tooley Street, London SE1 2JH.**

ZM1BCC: From April 15 to 25, an amateur radio station will be operating from the Public Library of the Birkenhead City Council. The station will be operated by local amateurs. Operations will be on the high frequency bands as well as v.h.f. and u.h.f. Times of operation will be from 9am (local time) to 5pm, with later times on Thursday and Friday April 21 and 22. If conditions are good, later times may be operated on other days.

A full-colour QSL card has been designed, showing the proximity of Auckland City. A brief history of Birkenhead from the time it was occupied by the Kawerau Maori tribe to the present, is on the back. Distribution is mainly by the bureau.

It will be of particular interest to the group in Birkenhead to contact other amateurs who live in districts of Birkenhead, Birkdale or Beach Haven in other parts of the world.

GB0IOS: Following the successful expeditions over the past few years to Lundy, Skye and the Western Isles, the Mid Northants Expedition Group are pleased to advise that this year's trip will be to the Channel Islands. A base station will be set up on the Island of Sark, and it is hoped that mobile and portable operation will be made from Jersey, Guernsey, Alderney and Herm. A special effort will be made for WAB collectors, and it is anticipated that all of the Parishes on both Guernsey and Jersey will be activated during the week April 30 to May 7. They will be on all h.f. bands. All QSOs will be QSLed via RSGB or direct via G4VID (s.a.e. please).

GB7CO: G4OBK and G0EJK, sponsored by the Central Lancashire ARC will be active from Wednesday March 23 to Tuesday March 29 from the Island of Colonsay. They will be using all h.f. bands and will be especially active in the WPX SSB contest as a multi op station. There will also be a

limited amount of v.h.f. activity on 144MHz. DXCC status is Scotland. IOTA ref: EU08. WAB: NR39 Strathclyde. Island Collectors Isle of Oransay NR38 and NR39. QSL will be via G4OBK (1988 callbooks only) or via the RSGB bureau.

GB4IMD: On April 23 the Cornish RAC are celebrating International Marconi Day. They expect to operate from the site where Marconi made his first transatlantic transmission—Poldhu Cove, near Mullion on the Lizard Peninsula. This is very close to where the Goonhilly Satellite Station now stands. Operation will be on 3.5, 7, 14, 21 and 28MHz using s.s.b.

LA1D: On Saturday May 28, Norsk Radiohistorik Forening (NRHF) will be taking vintage

communications sets, including equipment used for clandestine operations during WWII, to an open-air location similar to those used for war-time operations. Station LA1D would like to make contact with anyone interested in vintage radio. Tore Moe LA5CL comments, "It will be nice if other stations use vintage equipment too, but we don't mind if stations with modern equipment call us. We may have some more up-to-date equipment ourselves in case conditions become too difficult—at least on the receiving side."

LA1D will be operational with the following time/frequency schedule; it is thought that it may be difficult to reach to UK on 3.5MHz, but there should be a good chance of 14MHz.

UTC	NDST (Norwegian daylight saving time)	Main Freq.	Reserve Freq. (if QRM bad)
0700-0800	0900-1000	3.508	3.515
0800-0900	1000-1100	14.080	14.094
0900-1000	1100-1200	3.508	3.515
1000-1100	1200-1300	14.080	14.094
1100-1200	1300-1400	3.508	3.515
1200-1300	1400-1500	14.080	14.094


NRHF operate an "antique" net on 3.508MHz c.w. and 3.603MHz a.m. every Saturday from 0730UTC. They call CQ ANT and would be very pleased to hear from British stations running vintage equipment.

Decade Capacitance Box

Levell Electronics Ltd have added to their range of instruments a Decade Capacitance Box Type CB610. It costs £79 plus VAT.

The CB610 has 6 decades of capacitance from 10pF to 11.1111µF, with an accuracy of $\pm 1\% \pm 2\text{pF}$. Drift is $< \pm 0.3\% \pm 1\text{pF}$ in one year below 50nF and $< \pm 1\%$ above 50nF. The dissipation factor is < 0.002 at 1MHz from 30pF to 1nF, < 0.001 at 1kHz on 1nF to 50nF and < 0.01 on 50nF to 11µF. Maximum input is 250V d.c., 160V a.c. and 1A at h.f.

The decade capacitors are

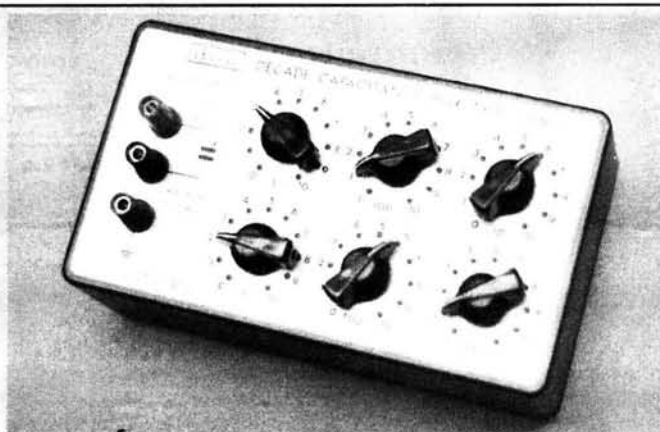

selected from components with stable dielectrics and the switches have silver plated self-wiping contacts with low losses up to 1MHz. The minimum control setting of 10pF includes the residual

capacitance, so the controls indicate total capacitance at all settings.

Levell Electronics Ltd.
Moxon Street,
Barnet,
Herts EN5 5SD.

District ARC are organising a Radio, Electronics & Hobbies Fair at the Science Museum, Wroughton, Swindon. It is planned to have a model railway swapmeet, model aircraft show and flying display, model boat show and radio control boat pond, model car meet, model steam engine rally and many other hobbies too, as well as amateur radio. They also hope to have helicopter sight-seeing trips, vintage vehicles, traction engines, etc., to keep all the family amused for the day. There is ample free car parking on site. The venue is well sited for access from the M4 and there are AA signs for the Science Museum from the motorway. Gates open at 10am.

***May 29:** The East Suffolk Wireless Revival will take place at the Civil Service Sportsground, The Hollies, Straight Road, Ipswich. This is between Bucklesham Road and Felixstowe Road (now the A1156) and adjacent to the Suffolk Showground. Doors open at 10am and there is plenty for all the family to do. More details from: **Colin Ranson.**
Tel: Ipswich 688204.

PW and SWM will be in attendance at rallies marked *.

Rally Calendar

March 13: The Bury Radio Society will be holding their 1988 rally at a new venue. The bigger venue is the Castle Leisure Centre, Bolton Street, Bury. There will be the usual large number of stands, a bring & buy and masses of radio and electronic traders. Talk-in will be on S22. More from: **M.L. Jamil G1VQE, 29 Harrow Close, Blackford Bridge, Bury.**

March 20: The Tiverton SW Radio Club are holding The Mid Devon Rally at the Pannier Market, Tiverton. There is easy access from junction 27 of the M5 and excellent parking facilities on site. There will be two halls of trade stands, a bring & buy and a mobile snack bar. Talk-in will be on S22. More details from: **G4TSW. Mid Devon Rally, PO Box 3, Tiverton.**

March 27: A Citizen's Band Radio Rally is being held at Orsett Hall near Grays, Essex. There will be stands for suppliers and clubs to display their wares, a bring and buy section, a raffle and bar facilities. There is free parking for over 400 cars and Orsett House boasts four acres of landscaped gardens and a restaurant (book in advance). Doors open between 10am and 4pm. For further details, contact **Bob or Pat on 0375 670841.**

April 17: The annual Trafford Rally and

Components Fair will be held at the Lancashire County Cricket Ground (Old Trafford), Talbot Road, Old Trafford, Manchester. Doors open at 11am (10.30am for the disabled) and there is free parking for over 1000 cars. All the usual attractions will be there including the bring and buy, a free cash draw, bar and cafeteria. Talk-in will be on S22 using G1TRC. For more details ring **061-881 3739** or **061 748 9804.**

***April 17:** The Trafford ARC are holding the Trafford Rally & Components Fair at the Lancashire County Cricket Ground, Talbot Road, Old Trafford, Manchester. Talk-in on S22 using G1TRC/A. Doors open 11am (10.30am for the disabled).

April 24: The Swansea ARS will hold their 7th Annual Rally in the Swansea Leisure Centre on the A4067, Swansea-Mumbles Coast Road. Note that it's a change of venue. Doors will be open between 10.30am and 5pm. There will be plenty of traders, a bring and buy, bookstall, refreshments, licensed bar and an h.f. station. Talk-in will be by GB2SWR. More details from the rally secretary: **Roger Williams GW4HSH. Tel: 0792 404422.**

***May 1:** The RSGB VHF Convention will be held at Sandown Park Exhibition Centre, Esher, Surrey. All the usual attractions will be there. For more details, contact: **Les Hawkyard**

G5HD, The Ery, Newtown St Petrock, Torrington, North Devon EX38 8LU.

May 2: The 1988 Doncaster Rally will take place at Bircotes Leisure Centre (near Bawtry). Talk-in will be on S22 using G4YRD. More details from **Audrey Wilson. Tel: 0302 721259.**

***May 15:** The Otley ARS are holding the 31st Northern Mobile Rally at the Yorkshire Agricultural Showground, Harrogate. More details from: **G3CQQ. Tel: 0943 602118**

***May 22:** The Swindon &

Analogue Multimeter

The Triplett Model 60 Type 2 multimeter can easily withstand drops onto hard surfaces from 1.5m.

It also has full overload protection on all ranges with three fuses and one diode. There is a separate, sealed,



battery compartment and a carrying handle that doubles as a tilt stand.

The measurement are displayed on a taut meter with a 115mm scale. Eight ranges of d.c. voltages go from 300mV to 1000V at 20kΩ/V sensitivity and $\pm 1.5\%$ f.s.d. accuracy. Six ranges of a.c. voltages go to 1000V at 5kΩ/V and $\pm 3\%$ f.s.d. accuracy. Direct current is to 1A and alternating current to 300A with an optional adaptor. Five ranges of resistance go to 10MΩ with a "low" centre scale of 12Ω while decibels are from -20 to +62dB.

The cost of the 60 Type 2 is £132.50 plus VAT. For more details, contact: **Alpha Electronics Ltd. Unit 5, Linstock Trading Estate, Wigan Road, Atherton, Manchester M29 0QA.**

Versatile DMM

The new Model 199 System DMM/Scanner, designed for bench or system use, combines two instrument capabilities into one half-rack size, steel-cased package. The mainframe is a complete 6-function (d.c./a.c. volts and amps, ohms and dB) auto/manual ranging, true r.m.s. reading, $5\frac{1}{2}$ -digit, IEEE-488 programmable d.m.m.

Key specifications include sensitivities of $1\mu\text{V}$, $1\text{m}\Omega$ and 100nA . A speed of 150 readings per second is available by selecting a $4\frac{1}{2}$ -digit lower-resolution mode. There is an internal 500-reading memory for data logging.

The optional internal 8-



channel scanner, Model 1992, offers 2-pole and 4-pole switching at 40 channels per second, with less than $1\mu\text{V}$ thermal offset in the switch contacts. With the scanner installed, the

Model 199 can directly compute the ratio or difference of two values.

Other features include a running average filter that can reduce the effects of external noise; a message

display capability that allows a controller to send messages to a non-skilled operator through the 9-digit, 14-segment alpha-numeric d.m.m. display; TRANSLATOR software, which allows the Model 199 to be integrated easily into existing automated test systems using different command formats, and also gives shorter mnemonic commands for improved efficiency when using the IEEE-488 bus.

The Model 199 System DMM costs £745, and the optional Model 1992 scanner a further £250. More details are available from:

Keithley Instruments Ltd.,
1-3 Boulton Road, Reading,
Berks RG2 0NH. Tel: 0734
861287.

Warnerdale Innovation Programme

Innovation is a natural resource, and this prompted Chris Parker, Engineer and Programmer, to form Warnerdale. His idea was to take the idea of the inventor, or the industrial manager with an eye for technical improvement, add his own expertise, and that of his colleagues and bring their plans to maturity.

The service is comprehensive, embracing technical design consultancy, advice on practical application, prototyping and even limited manufacture. Stage one, inevitably, involves detailed consultation. Stage two is technical design, using Warnerdale's database facilities to build and package a working model.

Chris Parker thinks he understands the needs of the industry. He recognises the needs of management to define problems and allow specialists to come up with the solutions.

For more information on Warnerdale, telephone Chris Parker on 0639 899276, or write to:
Warnerdale Electronics,
Unit 44,
Port Talbot Workshops,
Addision Road,
Port Talbot,
West Glam SA12 6HZ.

Catalogues

The latest Alpha Electronics catalogue is now available and features a large range of test equipment to suit all kinds of applications and budgets.

Detailed colour-coded sections include digital and analogue multimeters, lightmeters, cable locators, continuity testers amongst others. Manufacturers include such names as Fluke, Avo, Megger, TMK, Black Star and Hitachi to name a few.

For your free copy,

complete with price list, telephone: **0942 873434**. The latest copy of the Kanga Product Kits catalogue has arrived in the office. Kanga Products is a very small company, run by licensed and active amateurs for amateurs. There are such kits as a 160m s.s.b. transceiver, a dual-band receiver, a t.t.l. clock, r.f. sidetone generator and a variable frequency oscillator to mention a few. For a copy of the catalogue, send to:
Kanga Products, 3 Limes

Road, Folkestone, Kent
CT19 4AU.

We have received the 1988 catalogue from Technical Information Services too. They can supply repair manuals, circuit diagrams, technical manuals and books for all kinds of pieces of equipment and subjects. This is the first time that they have produced such a catalogue, and if you would like a copy, contact:
Technical Information Services, 76 Church Street,
Larkhill, Lanarkshire.

AF Power Meter

Power outputs of up to 150W into 4, 8 and 16 Ω loads can be measured directly by the Crotech Type 2018 audio frequency power meter.

It is suitable for measuring the output of amplifiers and other audio circuits. It will measure from 5mW to 150W into standard loads and up to 15W into loads from 50 Ω up to 10k Ω .


Power measurement accuracy is $\pm 3\%$ of full scale from 20Hz to 20kHz.

Overload protection is provided by an autotrip feature in the 150W range. This is operated when the temperature of the load exceeds 90°C and is indicated by a front-panel

overload l.e.d. It is powered by internal 6V batteries and can be used both desk-top and as a rack mounted instrument.

For further details,

contact:
Crotech Instruments Ltd.
2 Stephenson Road,
St. Ives,
Huntingdon,
Cambs PE17 4WJ.

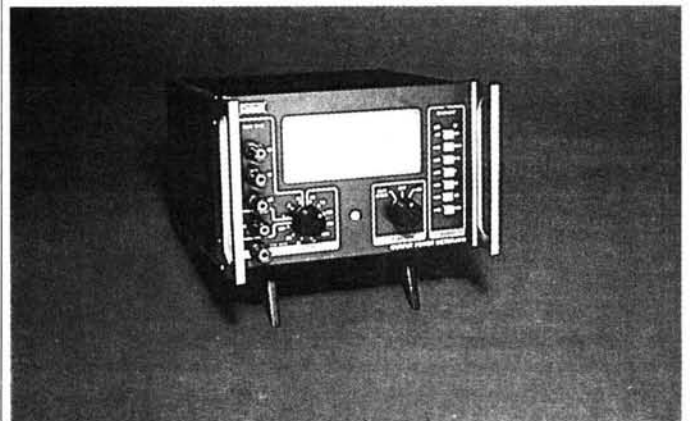

IoM Exhibition


The Isle of Man Radio Club are holding an exhibition on March 20 in the Sea Terminal, Douglas. They are aiming the afternoon (12 to 6pm) at youngsters. There will be demonstration stations and old radios and plenty of home-brew equipment on show.

Help, Please

Further instalments of Chas E. Miller's popular series on Valved Communications Receivers are being held up by the lack of copies of the circuit diagrams, good enough for reproduction in the magazine.

To be usable, the drawings must be reasonably clean. Good photocopies are acceptable, provided they are not made up of sheets joined together with Sellotape. The tape comes out as a black band when the circuit is processed for printing in the magazine!

We are presently looking for circuit diagrams for the following receivers: Collins 75A; Collins TCS; BC348 series; RCA AR-77. If you think you can help, please drop a line to the Editor, Geoff Arnold, PW Publishing Ltd, FREEPOST, Enefco House, The Quay, Poole, Dorset BH15 1PP.

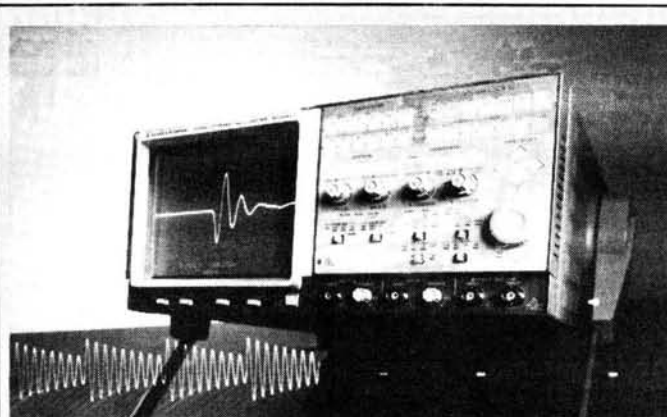

Digital 'Scope

The digital storage oscilloscope BOS from Rhode & Schwarz can handle single shots or rarely occurring events (e.g. "glitches"), fast signals with low repetition rates, pre-triggered events or very slow signals. This is because it has a built-in IEC/IEEE-bus interface.

The maximum sampling rate of 100MHz and the 10224-word memory make it possible to record a time

interval longer than 102µs. The BOS is fitted with a 7in c.r.t. and two cursors aid trace evaluation.

Programming of up to 10 test sequences (with option 45), and front-panel set-ups can be made without an external controller. The memories have a battery back-up so even when the unit is switched off the memory contents are not lost. The screen display can be printed out onto an IEC/IEEE compatible digital plotter or an XY recorder.

Morsum Magnificat

This newsletter/booklet is published quarterly to provide international in-depth coverage of all aspects of Morse telegraphy, from its earliest concept to the present time.

In the Winter 1987 issue there are articles written by W3WRE, G8PG, GD3RFH to name a few and cartoons by PA3ALM. Topics range from the historically informative to the easy-reading humorous.

It is for all Morse enthusiasts, amateur or

Licence Fees

The DTI have just announced that the licence fee for amateur radio, both A and B licences, will stay the same at £12. Beacon and repeater licences will also stay at £12 for each station. Citizen's Band radio licences are £12 too.

Out of the 47 different standard types of licences, 25 have changed, so amateur radio has been lucky to be amongst the 22 that have remained the same.

If you would like to know more about licence charges for all kinds of licences then you will need to buy a copy of *The Wireless Telegraphy (Licence Charges) (Amendment) Regulations 1988*, available from the HMSO.

professional, active or retired. One of the aims is to bring together material, which would otherwise be lost to posterity, providing an invaluable source of interest, reference and record relating to the traditions and practice of Morse.

The subscription rates are £6 per annum for the UK and Eire. Cheques should be made payable to Morsum Magnificat and sent to: **Tony Smith G4FAI, 1 Tash Place, London N11 1PA.**

Comtest Series 200

The Comtest Series 200 range consists of three models, the 212, 225 and 250. They are complete data communication troubleshooters for engineers, computer salesmen and those who install, repair or use RS232C/V24 equipment.

The state of the interface is easy to read as the breakout system, monitors and signal description are all on the same line. The line monitors show signal strength and function without battery power. The Model 212 offers all functions needed to locate RS232 interface problems, it

monitors the 12 most important lines and has one extra undedicated monitor to test secondary signals.

The Model 225 monitors all 25 signals and has cable and parallel test capabilities. The Model 250 monitors all 25 signals on both interfaces and has convenient null MODEM switching and the pulse trap option built-in as standard. The Comtest Series 200 testers are housed in sturdy ABS plastics case, and the contact system is gold plated. Each model comes with jumper cables and user manual. For more information, contact: **M-Trade (UK) Ltd., PO Box 35, London SW1W 8TX.**

New Telex Course at Portishead

New training courses at British Telecom International's Portishead Radio Station will help customers make more efficient use of maritime communications.

Staff at the station at Highbridge in Somerset are training ship's officers and their shore-based managers in the use of automatic radiotelex. Portishead operates the world's busiest and most advanced automatic radiotelex service for shipping.

With increasing demand for Portishead's service, the courses have been introduced to meet customer training

requirements for personnel both at sea and on shore.

The one-day course provides officers and shipping managers with a good working knowledge of all aspects of marine telex operation, leading to faster and more efficient use of communications facilities.

Mr Ernie Croskell, Head of Long Range Services and Station Managers at Portishead Radio, said, "Radiotelex is progressively replacing Morse as the standard form of maritime communication. We believe our courses are helping our customers get the best out of a service which is second to none."

For further details on the courses, telephone **Portishead Radio on 0278 781111** and ask for Customer Services.

Practical Wireless 144MHz QRP Contest—Sunday 12 June 1988

REALISTIC®

Portable All-Band World Receiver



Realistic DX-440. Tune into international news, views and entertainment from all over the world! This exciting "Voice Of The World" receiver features PLL synthesized circuitry which locks onto exact frequency so you can enjoy drift-free reception from around the globe. Receives FM stereo and full AM (150-29,999 KHz) including longwave, mediumwave and SW bands. Simply punch in any frequency with the direct-entry keys or use the 9-station memory for even faster access! Features automatic and manual scanning modes to locate any station on the air. With built-in monaural speaker, LCD quartz clock with timer, telescoping aerial and headphone socket. Requires 2 "AA" and 6 "C" batteries or AC/DC adapter.

20-221 £149.95

Tandy®

Tunes You Into A World Of Better Listening

Over 400 Tandy Stores And Dealers Nationwide.

Prices may vary at Dealers. Offers subject to availability.

Tandy, Tandy Centre, Leamore Lane, Bloxwich, Walsall, West Midlands, WS2 7PS.

PW REVIEW

If you're looking for a pocket sized v.h.f. hand portable transceiver, then this new model from Alinco, the ALX-2E, could be for you. Mike Richards G4WNC takes a look inside.

The ALX-2E from Alinco is a very compact v.h.f. transceiver with many features which should appeal to the amateur who requires a dedicated portable rig.

Operation

As this is a specialised portable rig, the connections are very simple. The very compact 85mm rubberised helical antenna screws into a rather unusual antenna socket on the top panel. This socket is very similar to a phono socket except that the outer or screen has a screw thread to ensure a good fit. The reason for using this type of connector appears to be to save valuable space on the top panel. The next job is to connect the supplied battery pack (after it's been charged). The standard EBP-2N 160mAh battery pack is a firm slide fit onto the base of the ALX-2E.

The supplied instruction manual comprises a 265mm x 255mm sheet which is printed on both sides and

folded into four making it roughly equivalent to a seven-page A5 booklet. In addition to this manual, there is a full circuit diagram and block schematic. The only other literature supplied was a leaflet describing the various battery packs that are available for the ALX-2E.

All the controls, with the exception of the p.t.t., are located on the top and front panels with no awkward switches tucked away. The only rotary control is the combined volume/on/off switch which is mounted on the top panel and is fitted with an 8mm diameter knob. The squelch level is pre-set, but it can be overridden by depressing a non-locking button on the top panel. The ability to override the squelch can be very useful when working under difficult conditions.

Frequency selection is by three thumb-wheel switches on the top panel. The convention used follows normal practice with the lefthand digit representing units of MHz, the next indicating 100s of kHz and the final digit indicating 10s of kHz. In order to




cover the normal 25kHz spaced f.m. channels an extra button is used to add 5kHz to the frequency indicated by the thumb-wheels.

When operating via a repeater it is necessary to introduce a frequency shift so that the transmitter operates 600kHz below the receive frequency. This facility is provided on the ALX-2E and is enabled by a three-way slider switch on the front panel. The central position of this switch is marked S for simplex operation whilst the positions marked + and - introduce either a positive or negative shift of the transmitter frequency. The positive shift position can sometimes be very useful if you want to work in "reverse repeater" mode.

One other essential feature for repeater working is a 1750Hz tone burst, again this feature is included in the ALX-2E and is operated by another non-locking push-button on the top panel. Not only does the tone burst button operate the 1750Hz tone, but it also keys the transmitter which is very convenient.

Another useful feature on the top panel is an illuminated strip immediately above the thumb-wheel switches. This strip is activated either by pressing the lamp button, also on the top panel, or by keying the transmitter. When the transmitter is keyed the strip shows a red light whilst if activated by the lamp button in receive mode a green light shows.

As well as the main frequency selection via thumb-wheels the ALX-2E has a very useful memory channel feature. The memory frequency is selected in a similar manner to the main frequency

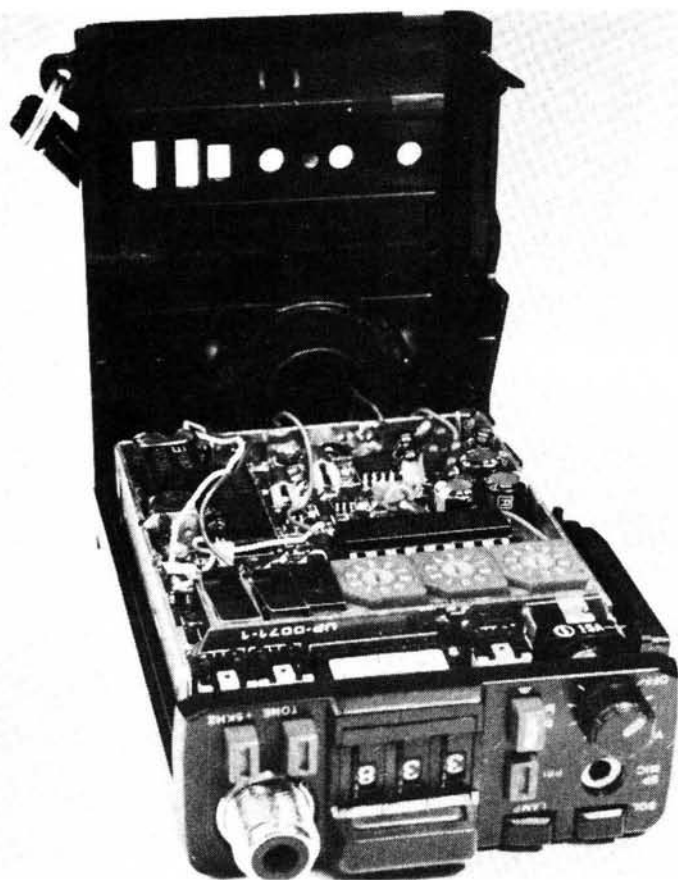

but using three miniature rotary switches on the front panel. These miniature ten-way switches are operated by using a small screwdriver blade, fortunately the required tool is incorporated on the hand strap making adjustment very easy. As with the main thumb-wheels an extra switch is provided to enable the addition of 5kHz where necessary.

The selection of either main or memory frequency is achieved using a locking push-button on the top panel, this enables the operator to change frequencies very quickly which can be handy. Another feature associated with the memory is the priority function. When this is activated the receiver will monitor the priority channel every 1½ seconds and emit a "beep" to alert the operator when a signal is detected, the priority frequency being whichever of the two pre-set frequencies is not in use. The priority feature can be very useful, for example to monitor the local repeater whilst listening to a QSO on a different frequency.

The final switch on the front panel controls the transmitter power and the battery economy circuit. This switch has three positions: the first selects high power for the transmitter and activates the battery save circuit. The second position leaves the battery save on, but also reduces the transmitter output power. The final position disables the battery save and selects high transmitter power. These combinations seem to be well chosen and should prove very useful, particularly when using the ALX-2E in remote locations for extended periods.

For those of you who prefer to operate using a speaker/mic there is a 1.5mm stereo jack on the top panel carrying the necessary connections.

Circuit Description

A modern synthesised 144MHz transceiver is obviously a fairly complicated piece of equipment so I will describe the main functional blocks rather than a full circuit description.

Taking the receiver first, the signal from the antenna is fed to a bipolar r.f. amplifier via a diode switch and low pass filter. The r.f. amplifier output is then coupled to a f.e.t. mixer and 16.9MHz filter to produce the first i.f. This i.f. is further amplified once more before finally being demodulated. The audio signal is then fed to an LM386 audio amplifier via the volume control and pre-amp. The resultant high level audio signal is connected to the 25mm internal speaker via the speaker/mic jack on the top panel.

The transmitter chain starts with the microphone signal which can be either



from the internal electret element or from the speaker/mic. The low level audio signal is first amplified by an automatic level controlled amplifier to reduce the dynamic range. This amplified signal is then limited and filtered before being passed to the reactance modulated v.c.o. (voltage controlled oscillator). The v.c.o. frequency is controlled by the local oscillator phase locked loop and runs at half the output frequency, i.e. 72MHz.

The v.c.o. output is then fed to a frequency doubler before being amplified and filtered. The final amplification is achieved using a power module which is coupled to the antenna via a diode switch and low pass filter. The high/low power switching is achieved in the pre-driver stages.

The local oscillator signals are derived using diode switched crystals and a dedicated phase locked loop/divider integrated circuit.

The battery saving circuit is worthy of mention and works by enabling the receiver for only ½ second in every 2½ seconds. This reduces the receiver power consumption from about 25mA to 6mA, a worth while saving.

Performance

The ALX-2E has performed very well throughout the review period of several weeks. One point to remember is that the ALX-2E is a dedicated portable rig and as such has no facility for accepting external power. The type of antenna socket used may also prove

★ SPECIFICATIONS

Frequency coverage:	144–145.995MHz (140.005–149.995MHz)
Signal type:	F3
Antenna impedance:	50Ω
Power requirement	Receive, battery save off 25mA (24mA). Receive, battery save on 8mA (6mA). Transmit, High power 750mA (980mA). Transmit, Low power 350mA (420mA)
Dimensions:	66mm x 150mm x 28mm
Weight:	240g

TRANSMITTER

Output power:	High 2.0W (2.2W) Low 400mW (400mW)
Modulation reactance:	Max. deviation ±5kHz
Spurious radiation:	–60dB (–62dB 2nd harmonic)

RECEIVER

Reception system:	Double superheterodyne
Intermediate Frequency:	1st 16.9MHz, 2nd 455kHz
Sensitivity:	0.25µV (0.22µV) for 12dB SINAD. Signal/noise 26dB (25dB) at 0.5µV input
Squelch sensitivity:	0.25µV (0.2µV)
Selectivity:	–6dB ±7.5kHz (±12kHz). –60dB ±15kHz (±28kHz)
Audio Output:	200mW (170mW) for 10% t.h.d. 8Ω

Measured results are shown in brackets and were taken using the EBP-3N 450mAh battery with a fully charged voltage of 7.5V.

to be a problem if you want to connect an external antenna, though I have heard that there is a BNC converter on the market.

As with all miniature rigs the control panels are quite crowded and may create problems for anyone with thick fingers, though I personally found most of the controls to be well placed and easy to use. The only change that would slightly improve the layout, is to reverse the positions of the 5kHz and tone-burst switches.

The technical performance of the ALX-2E is worthy of some comment. The results of the laboratory tests agreed with the manufacturer's figures on most counts, with the majority of the discrepancies explained by different supply voltages. The only major difference occurred with the selectivity measurements. My normal technique is to apply a 60% modulated on-channel signal at a level adjusted to produce 15dB SINAD. A second signal generator is then set 6dB higher than the first and tuned towards the channel frequency until the SINAD is reduced

to 12dB. The process is then repeated from below the channel. The result of this test gives the ± 6 dB frequencies, the 60dB point is measured using the same technique but with the second generator level set 60dB higher. Unfortunately the manufacturer's measurement technique was not specified so a direct comparison is rather unfair. The selectivity results obtained from the lab tests were actually quite satisfactory for a portable transceiver. The 6dB selectivity at ± 12 kHz is rather wider than normal, but this would only really cause problems if channel spacing was 12.5kHz as opposed to the normal 25kHz. The 60dB figure although not particularly good should not cause any serious problems with the rig's intended use.

The transmit and receive frequency coverage of the ALX-2E was 140.005MHz to 149.995MHz, rather wide for the 144MHz band! The receive sensitivity was well maintained throughout most of this extended band, dropping off rapidly below 141MHz.

The supplied protective case, although cleverly designed with a separate section for the battery, made the operation of some of the controls rather awkward. This problem could probably be overcome by attacking the case with a sharp knife, but this type of remedy shouldn't really be necessary.

Conclusion

Overall I think that the ALX-2E is quite a useful rig for dedicated portable use. I'm sure many users will find the memory channel and priority working to be a boon on RAYNET exercises and the like. The battery saving circuitry was also very effective and is a valuable if not essential feature on a modern portable transceiver.

One point which will need special care is the extended frequency coverage of the ALX-2E which makes out of band transmission frighteningly easy!

My thanks to *Waters and Stanton, 18-20 Main Road, Hockley, Essex SS5 4QS* for the loan of the Alinco ALX-2E. The rig costs £189.

SWAP SPOT

Have Uher 4000 Report L. Would exchange for Wow and Flutter Meter. Tel: 0424 221636. *D874*

Have vintage radio and test gear. Would exchange for National Co. USA 1-10, SW3, SW5, FB7, FBXA receivers. Also any National equipment; receivers, transmitters, accessories, HRO's, manuals. Working or not, condition unimportant. Tel: St. Albans 39333. *D880*

Have Realistic PRO-2001 scanner 66-88, 144-174, 410-512MHz, mint condition still boxed. Would exchange for Cobra 148 GTL DX multimode or similar. Stewart. Tel: Cheddington 661452 9am-5pm. *D884*

Have FDK Multi 750XX 144MHz multimode transceiver, 1/20 watts, 2 v.f.o.s, scanning, plus matching transverter expander for 430MHz 1/10 watts. Allows 144MHz/430MHz or semi duplex cross band operation. As new condition, boxed. Would exchange for FT-790 plus NiCads, etc., in same condition. Tel: 01-647 3056. *D904*

Have Yaesu FT-101ZD h.f. transceiver with f.m. fitted. Would exchange for FRG-8800, R2000, HF125 or similar. Duncan. Tel: 0623 823001. *D930*

Have Italian stamps unused in good condition, Second World War era. Would exchange for back issues of *Practical Wireless* and *Shortwave Magazine*. David Bocca Corsico Piccolino, Via Vecchia Per Gambolò 53, 27029 VIGEVANO PV, Italy. *D940*

Have Radiostrutor scope in a nice case. Would exchange for 28MHz f.m. mobile transceiver or w.h.y? Tel: Reading 588503 *D945*

Have FT-767 DX (FT-707) plus mic, owners manual and workshop manual. Would exchange for dual band 144MHz/430MHz multimode base station. Also have 5 band h.f. rig (Shimizu SS10SS) with TI120 linear (200 watt p.e.p.) would exchange for 50MHz multimode transceiver. G4XPP QTHR. *D946*

Have QRO 10GHz Klystron, 75mW, WG flange output, micrometer tuned. Would exchange for BSA Bantam gearbox or w.h.y? G4FFO. Tel: Cambridge 860150. *D948*

Have IC-2E and 2500 144MHz hand held transceivers, plus Amstrad 6128 with green screen. Would exchange for mast or w.h.y? G3NSI. QTHR. Tel: 091-586 5259, evenings. *D957*

Have electronic organ; Technics U40. Two manuals plus pedals. Nice big sound! Would exchange for aeronautical radio, aircraft parts or instrumentation, manuals or charts, etc. Alternatively, r.f. test equipment or w.h.y? Godfrey G4GLM. Tel: 01-958 5113 weekday evenings. *D958*

Got a camera, want a receiver? Got a v.h.f. rig, want some h.f. gear to go with your new G-zero? In fact, have you got anything to trade radio-wise?

If so, why not advertise it FREE here. Send details, including what equipment you're looking for, to "SWAP SPOT", *Practical Wireless*, Enefco House, The Quay, Poole, Dorset BH15 1PP, for inclusion in the first available issues of the magazine.

A FEW SIMPLE RULES: Your ad. should follow the format of those appearing below, it must be typed or written in block letters; it must be not more than 40 words long including name and address/telephone number. Swaps only—no items for sale—and one of the items MUST be radio related. Adverts for ILLEGAL CB equipment will not be accepted.

The appropriate licence must be held by anyone installing or operating a radio transmitter.

Have Sony PRO-80 absolutely brand new with guarantee; 150kHz-223MHz a.m., f.m., s.s.b. hand held receiver. Would exchange for Signal R535. Taylor. Tel: 01-942 9869. *D961*

Have brand new camping type trailer (5ft x 3ft x 18 inches) complete with all-weather cover, cost £259. Would exchange for older type h.f. transceiver: KW2000, etc, preferably with 1.8MHz, or very good quality h.f. receiver. All offers considered. Peter G0GSZ, QTHR. Tel: (0603) 748338 anytime. *D962*

Have RCA 16mm film projector with sound, working and complete with extra lens plus accessories. Would exchange for radio associated computer or good a.t.u. or w.h.y? Tel: 0703 894200. *D963*

Have f.m. CB transceiver plus power supply and s.w.r. meter, also Zenith s.l.r. 35mm camera. Would exchange the lot for Grundig Satellit or similar h.f. receiver with b.f.o. cash adjustment. Kevan, 77 Annandale Crescent, Lochmaben, Dumfriesshire DG11 1PU. Tel: (0387) 810359. *D968*

Have Sony ICF-7600DA 15 broadcast bands, 15 presets, s.w. in 5MHz steps for easy tuning, as new. Would exchange for Sony ICF-7600D receiver. Tel: 01-959 7715. *D971*

Have FT-726R with 144MHz and 50MHz fitted, pristine condition 4 weeks old. Would exchange for FT-757GX and accessories. G1VXW. Tel: 0384 65614. *D972*

Have vintage radio equipment. Would exchange for HRO, valved communications, military, domestic, crystal, bakelite radios. Valved transmitter, test equipment, amplifiers, monitor loudspeakers; condition unimportant. Also wanted manuals and catalogues plus any valves except TV types. Tel: St. Albans 39333. *D973*

Have spares for Philips 1500/1502/1700 video recorders, also have lots of other gear to swap. Would exchange for PW cassettes No 5 and No 6. J. Brown, 45 Marlborough Avenue, Falmouth, Cornwall TR11 4HS. *E006*



RAYCOM give you MORE PURCHASING POWER!

FOR FAST SERVICE PHONE IN YOUR ORDER WITH ANY MAJOR CREDIT CARD OR IN MOST CASES WE CAN OFFER YOU INSTANT CREDIT OF UP TO £1,000.00 (SUBJECT TO STATUS RAYCOM ARE LICENSED CREDIT BROKERS APR 29.8%, SUBJECT TO VARIATION. FREE CREDIT ON CERTAIN PRODUCTS AT LIST PRICES. 50% DEPOSIT AND SIX MONTHLY PAYMENTS. PLEASE TELEPHONE FOR MORE DETAILS AND APPLICATION FORMS.

NEW HELPLINE 0836 28228 (until 9pm Daily)



ORDERING INFORMATION

ALL PRODUCTS WE ADVERTISE ARE NORMAL STOCK ITEMS OUR NEW MAIL ORDER DEPARTMENT CAN NOW DESPATCH MANY LINES SAME DAY, BUT PLEASE ALLOW UP TO 14 DAYS DELIVERY TIME IS SUBJECT TO CARRIAGE METHOD. IF ORDERING BY MAIL PLEASE INCLUDE CARRIAGE AND STATE YOUR DAYTIME TELEPHONE NUMBER. ALL PRODUCTS OVER £750.00 CARRIAGE FREE. PLEASE ALLOW TIME FOR PERSONAL CHECKES TO CLEAR. PLEASE CALL BEFORE ORDERING AND FOR MORE DETAILS. PLEASE TEL: 021 544 6767

THROUGH YOUR CONTINUOUS AND VALUED CUSTOM, RAY WITHERS COMMUNICATIONS LTD. HAS MOVED AND EXPANDED TO ENABLE US TO OFFER YOU EVEN BETTER SERVICE AND PRICES - STILL WITH THE RAYCOM GUARANTEE, BEST EQUIPMENT, BEST SERVICE, BEST PRICES, BEST BACK-UP, AND PLENTY OF PARKING FACILITIES AND EASIER TO GET TO! WE NOW BOAST THE BEST CENTRAL FACILITIES IN THE COUNTRY. WHY NOT POP ALONG AND SEE THE LATEST TRANSCIVERS, SHORTWAVE/SCANNING RECEIVERS AND ACCESSORIES? MOST OTHER PRODUCTS ADVERTISED IN THIS MAGAZINE ARE AVAILABLE AT RAYCOM, AND DON'T FORGET OUR EXCLUSIVE PRODUCTS AND MODS!

NEW PRODUCTS

NEW
IC781
ICOM



Come and see the NEW ICOM IC781 HF Professional transceiver with built in Band Scope, Auto ATU and PSU, the new KENWOOD RZ1 Mobile Scanner, the new YAESU VHF Base Station and Mobile, and the new FOX mobile Scanner... because of our purchasing power and overseas contacts we get the new models first! And offer the best introductory prices!

SPECIAL OFFERS

WHILE STOCKS LAST!

	NORMAL	SPECIAL
YAESU FT726 BASE STATION C/W 2MTRS	£999.00	£695.00
YAESU YD844A BASE STATION MIC 600 50K	£39.95	£19.95
YAESU FT77 5W-120V 1.6 30MHz PA UNIT	£149.00	£75.00
YAESU HORN RELAY ALARM UNIT WITH 555	£12.50	£4.50
ICOM ICA20 AIR BAND CAA APPROVED H/H	£429.00	£379.00
ICOM ICA2 AIR BAND CAA APPROVED H/H	£399.00	£279.00
KENPRO KT400EE 2W UHF H/H C/W CHARGER	£279.00	£199.00
COLOUR-ROTA 40KG ROTATOR 3 CORE CABLE	£45.00	£37.50

Please ask for our SPECIAL OFFERS LIST, USED LIST, SCANNERS LIST, and LATEST PRODUCT NEWS. Please send a large SAE

BASE STATIONS

YAESU FT767GX RWC/MK2 ALL MODE / BAND BASE STATION	£1499.00
YAESU FT767GX RWC/MK2 AS ABOVE C/W 2 OR 6 METRES	£1590.00
YAESU FT767GX MK2 MODEL WITH IMPROVED FEATURES	£895.00
YAESU FT726R MULTI-BAND MULTIMODE SPECIAL OFFER	£695.00
YAESU FT747GX NEW MULTIMODE 100W HF TRANSCEIVER	POA
NEW YAESU FT736R MULTIMODE BASE STATION C/W 2 METRES	POA
ICOM IC735 HF HIGH PERFORMANCE MINI HF TRANSCEIVER	£892.50
ICOM IC275 25W 2 METRE MULTI-FEATURE SUPERB BASE STATION	£949.00
ICOM IC575 10W 10 & 6 METRE ALL MODE SUPER BASE STATION	£949.00

CALL FOR BEST PRICES ON OTHER ICOM AND YAESU BASE STATIONS

YAESU

FT767
GX RWC
MK2



Raycom offer our own improved version of this fabulous HF-UHF transceiver, we fit a small SMD chip component mod board in the VCO to improve the RX dynamic range by up to 20dB, FOC when purchased new from us. If you are lucky enough to own the FT767 already, send your unit + £59.50 and we will fit it for you! (inc. return carriage). Also available at some Yaesu dealers. **YAESU HAVE ADOPTED OUR UP-GRADE IN CURRENT PRODUCTION MODELS.**

ANTENNAS & ACCESSORIES

NOW AVAILABLE AT RAYCOM. CUSCRAFT, BUTTERNUT, HY-GAIN ANTENNAS, JAYLUM, TONNA, MET, HAM-M ROTATORS. Call for full details, prices, availability and delivery costs.

ICOM AH7000 SUPER 2501300MHz DISCONE	£79.50
G5RV HALF SIZE HF ANTENNA ready to use	£16.50
G5RV FULL SIZE HF ANTENNA ready to use	£18.50
G8KW-TYPE 7 1MHz TRAP DIPOLE KIT SO239	£24.50
G8KW-TYPE as above for use with 300 OHM	£23.50
G8KW-TYPE 2X 7.1 TRAPS ONLY, LESS CABLE	£9.95
RAYCOM AIRBAND VHF SIX ELEMENT DISCONE	£12.50
RAYCOM DISCONE VHF 60-600MHz 8E 80239	£29.50
SUN KQ209 SE2 5/8 MOBILE TILT OVER 259	£14.50
RAYCOM CAST GUTTERMOUNT C/W SO239/COAX	£18.50
GAMMA TWIN 2 METRE SLIM JIM KIT inc. instr.	£12.50
RAYCOM/RWC HB9CV 2 METRE 2E MINI BEAM	£12.50
RAYCOM/RWC HB9CV 70CM 2E MINI BEAM	£8.95

The above popular products POST FREE.

SCANNERS

YAESU FRG9600 from the company who specialises in fitting extra options, as supplied to Government departments and professional bodies. We also upgrade existing models, please call for more details, prices, delivery and information.

Yaesu FRG9600 Basic Model Improved 'S' Meter + Sens	£465.00
Yaesu FRG9600/RWC Mk2 60-950MHz 'N' Connector Fitted	£495.00
Yaesu FRG9600/RWC Mk3 HF 100KHz-950MHz plus Mk2 Spec	£595.00
Yaesu FRG9600/RWC Mk5 HF 50KHz-950MHz Active Mixer	£625.00
ICOM ICR7000 25M-2GHz superb quality professional Rx	£859.00
ICOM ICR7000/AH7000 Receiver plus Matching Discone	£937.50
Kenwood RZ1 New 25-905MHz Mobile Wide and Narrow AM/FM	POA
Fox VHF-UHF Multi-Function Mobile Scanner FM only	£139.00
Uniden-Bearcat UBC 50XL VHF-UHF 10ch: H/held Scanner	£99.50
Uniden-Bearcat UBC 70XL VHF-UHF 20ch: Miniature H/held	£199.00
Uniden-Bearcat UBC 100XL VHF-UHF-Airband H/held Scanner	£189.00
Uniden-Bearcat UBC 175XL VHF-UHF-Airband Desk Top	£175.00
BJ200 Mk2 VHF-UHF-Airband-Military Airband H/held	£220.00
AOR 2002 25-550, 800-1300MHz Desk-Top/Mobile AM/FM	£469.00
Sony Air 7 Top Quality VHF-Airband Handheld Scanner	£245.00
Package deal on above Mk3/5 FRG9600 c/w AH7000 discone, G5RV, PA4 AC PSU, complete receiving station HF-UHF including delivery UK mainland. Add £100.00 to above price.	
PACKAGE DEAL AVAILABLE ON ALL MAKES	
SHORT WAVE RECEIVERS	
Yaesu FRG8800 Short Wave 100KHz-30MHz all Mode + Mem.	£589.00
Yaesu FRG8800/FRV8800 as above with VHF Conv. fitted	£679.00
ICOM ICR 1 HF Top Grade Communications Receiver	£799.00
Sony PRO80 HF/VHF Handheld Scanner c/w accessories	£345.00
Sony 2001D Short Wave/Airband DEI IIXF RX with ANI kit	£395.00

Many more makes and models in stock. PLEASE CALL FOR PRICES. DELIVERY COSTS and any advice or information, or send large SAE (Insured post and packing £10.00. Carrier £12.50)

HANDHELDS

* - Extended Receiver coverage available, call for details.

YAESU FT277R/FNB4A 2.5W (5W) DUAL BANDER C/W CHRGR	£395.00
*YAESU FT237R/FNB10 2.5W (5W) 2MTRS C/W CHARGER	£249.00
*YAESU FT737R/FNB10 2.5W (5W) 70CMS C/W CHARGER	£259.00
*ICOM MICRO 2E 2.5W 2MTR HANDHELD WITH CHARGER	£209.00
CTE1600 (SAME AS ICOM IC2E) C/W NICAD CHARGER	£179.00

Many other types of hand held stocked, please enquire

PORTABLES

FT290RMK2 2.5W MULTIMODE STANDARD ACCESSORIES	£399.00
FT290RMK2 2.5 WATT M/M AS ABOVE C/W NICADS CHRGR	£425.00
FT290RMK2/FL2025 (STD) WITH 25W LINEAR AMPLIFIER	£395.00
FT690RMK2 6MTR 2.5W MULTIMODE STANDARD ACCES	£429.00
FT690RMK2 6MTR 2.5W M/M AS ABOVE C/W NICADS CH	£425.00
FT790RMK2 NEW 70CM 2.5W MULTIMODE DUE OUT SOON	£499.00

MOBILES

YAESU FT211E 45W 2MTR MOBILE WITH FREE

1.4 WAVE ANT	£299.00
YAESU FT212RH NEW 45W 2MTR MOBILE DVS FEATURE OPT	£349.00
*ICOM IC28E 2MTR 25W MOBILE WITH FREE 5.8 ANTENNA	£359.00


Many other types and makes stocked, please enquire

Opening hours 9am-5.30pm 6 days, late nights Thursday & Friday till 7pm.

SCANNERS

Bearcat
by uniden


UBC 175XL



UBC 100XL

RAYCOM ARE TRADE AND RETAIL DISTRIBUTORS FOR THIS SUPERB RANGE OF QUALITY SCANNERS. THE POPULAR UBC 100XL HAND HELD HAS SOLD IN THOUSANDS, BUT IS NOW COMPLEMENTED BY THE UBC 70XCL POCKET SIZED HANDHELD ALSO THE NEW COST EFFECTIVE UBC 50XL HANDHELD SEE THE NEW MODELS IN OUR SHOWROOMS OR SEND A SAE FOR DETAILS.

FROM £99.50

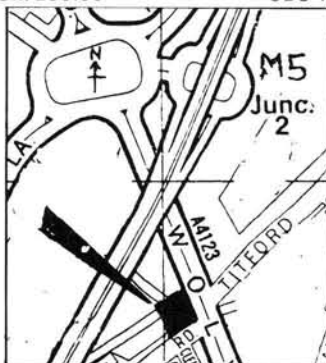

SONY RAYCOM now appointed official Sony dealers, full range of both professional and domestic models available to order.



RAYCOM COMMUNICATIONS SYSTEMS LTD.
INTERNATIONAL HOUSE, 963 WOLVERHAMPTON ROAD
OLDBURY WEST MIDLANDS B69 4RJ
Telephone 021 544 6767. Fax 544 7124. Telex 336483 Identi-G

Theory

Earlier in this series we talked about the gain of an antenna and its relation to the aperture. Now we'll have a look at how to achieve gain and the relationship between gain and the directional properties of an antenna says A. J. Harwood C Eng MIERE G4HHZ.

Making Waves-A Guide to Propagation

Part 5—Gaining direction

To begin with let's consider the half wavelength dipole which we will use as a reference, although we could if we wished use the isotropic source. The dipole itself has a directional radiation pattern in the plane containing the dipole's length. It radiates omnidirectionally in the plane at right angles to this as shown in Fig. 5.1. To calculate the radiation pattern of the dipole involves some fairly difficult mathematics, but the result is that in any direction the field strength relative to the maximum is given by the equation:

$$E = \frac{E_0 \times \cos(\pi/2 \times \sin(\theta))}{\cos(\theta)}$$

where the maximum field strength is E_0 (usually taken as one) and is in the direction at ninety degrees to the dipole's length ($\theta = 0$). When plotted in polar form, this equation results in the familiar figure of eight pattern. The plane parallel to the dipole is the one containing the E field, so it is referred to as the E plane. The field that is perpendicular to the dipole is called the H plane. Similarly, we can refer to the E and H plane polar diagrams. For the dipole the E pattern is the figure of eight and the H pattern is circular.

As an example of a more complex antenna system, let's consider what happens when we take two dipoles and feed each of them with power. In the case I've chosen (Fig. 5.2), the two dipoles are placed parallel and separated by a distance d . The current in each dipole is in phase since they are equidistant from the feedpoint. In order to relate back to the single dipole fed with a current I , this current is assumed to be:

$$\frac{I}{\sqrt{2}}$$

This is done so as to make the total radiated power the same for the dipole and for the pair of dipoles. For the single dipole, the radiated power is $I^2 \times R$. For the pair, each radiates $(I/\sqrt{2})^2 \times R$, giving a total power of $I^2 \times R$ where R is the radiation resistance which, as we saw in Part 2, is 73.2Ω . Each dipole will therefore produce a field strength

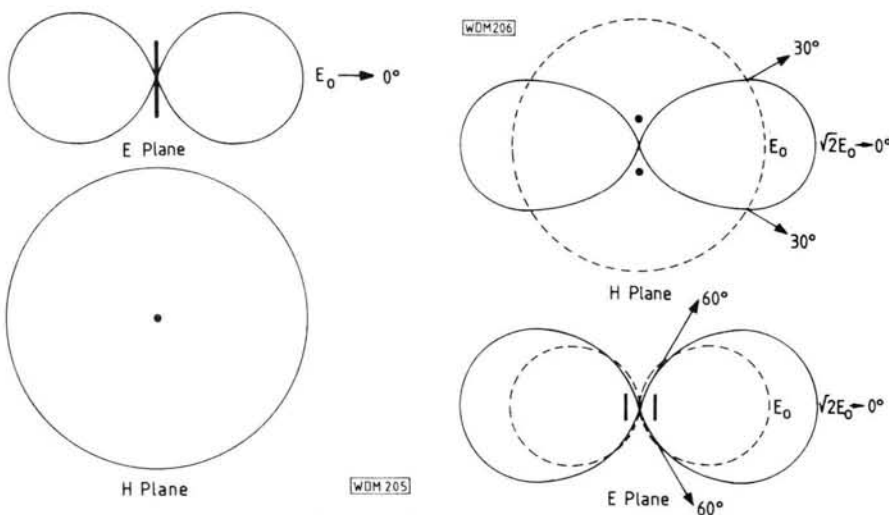



Fig. 5.1: Radiation patterns for a half wavelength dipole

Fig. 5.2: Radiation patterns for an array of two halfwave dipoles spaced by $\lambda/2$ and fed in phase. In the plane looking directly down onto the dipoles the pattern is the same as that of a single dipole but scaled by $\sqrt{2}$

of $E_0/\sqrt{2}$ compared to the single dipole and the maximum field strength we can get is $e_0/2/\sqrt{2}$ or $\sqrt{2} \times e_0$. We can also deduce that the power gain of the array is 2.

Commonsense tells us that if we look directly down on the dipoles, we have done nothing to alter the radiation pattern. So for the pair, the E plane diagram is the same as that of a single dipole but with an increase of field strength of $\sqrt{2} \times e_0$ in all directions. What about in the H plane where we are looking at the dipoles end on?

One way of looking at this is to consider the waves from each of the dipoles some distance away, and to calculate the total field strength due to the pair. The distance is measured along a line which is at an angle to the line joining the two dipoles, it passes through the mid-point of the pair as shown in Fig. 5.3. Using the mid-point as a reference results in a pattern for which, at a given distance in any direction from the point, the resultant wave is in phase. The point is therefore called the phase centre of the array.

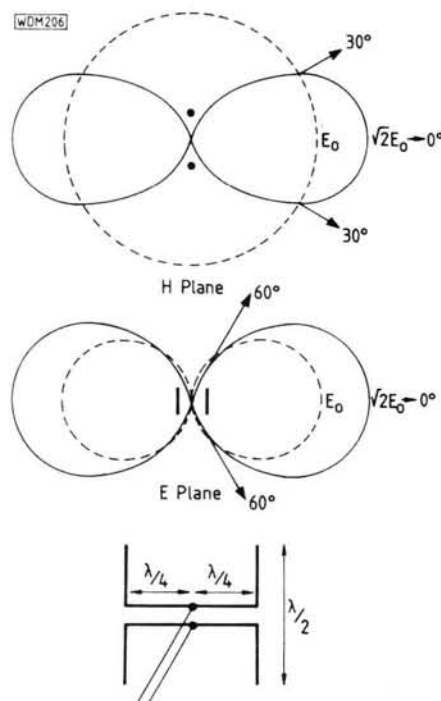

If we consider the phases of the two waves and refer them to this mid point, one wave will have travelled the distance from the mid-point to the receiving point less the distance $d \times \sin(\theta)/2$ and the other by a correspondingly longer distance. This distance is equal to a phase difference of:

$$\frac{2\pi/\lambda \times d \times \sin(\theta)}{2} \text{ radians}$$

$$\text{or } 180 \times d \sin(\theta) \text{ degrees}$$

The two waves are therefore twice this difference apart in phase as shown in Fig. 5.3b. The magnitude of the received wave is given by the sum of these two waves taking into account their phase difference, their vector sum. This is given by the length of the diagonal of the parallelogram whose sides are drawn equivalent to the size of the waves, which in this case are equal, and where the angle between them is their total phase difference and is:

$$E = E_0 \times \sqrt{2} \cos\left(\frac{\pi \times d \times \sin(\theta)}{\lambda}\right)$$

We now have an equation relating wave size and direction in the H plane. In the direction at right angles to the line joining the two dipoles, the magnitude is greatest and is $\sqrt{2}$ as we anticipated earlier. Remember, this gain is compared to a single dipole radiating the same power, so again we can see that the antenna has a power gain of 2 in this direction. The pattern is obviously different for different values of d and a frequently used case occurs when d is one half wavelength. The equation for the H pattern then becomes:

$$E = E_0 \times \sqrt{2} \cos \left(\frac{\pi \times \sin(\theta)}{2} \right)$$

Plotting the patterns to scale on common axes (see Fig.5.2), shows that while the array has a gain over the dipole for values of between 0 and 30 degrees, for larger angles the dipole produces greater field strengths. The array in effect spreads the power over a narrower angle and consequently is said to have a narrower pattern. In general, the greater the gain of an array then the narrower is the pattern.

If θ is 90 degrees then the answer is 0, so the array radiates nothing along the line joining the dipoles and the maximum broadside on to this direction. For other spacings, if d is smaller than a half wavelength there is always some radiation in all directions; whilst if d is made larger than a wavelength the pattern becomes a number of lobes whose size and direction is dependent on d with the maximum radiation always in the direction $\theta = 0$ degrees.

This analysis assumes that the current in each dipole is always in phase with the voltage across its terminals but in practice this isn't so. The current in one also induces a current in the other since they have a mutual impedance as well as their own input impedance—they are after all fairly closely spaced. This also has an effect on the radiation pattern and the gain.

For the array we have just considered, the gain is in fact at a maximum of almost 3 when $d = 0.65\lambda$, with the pattern becoming narrower. As a first approach, however, the method mentioned is a good way of getting an idea of the pattern. The principle can be used for any array of radiating sources. The pattern can be calculated by finding the magnitude and phase of each contribution in all directions and then adding these contributions vectorially. In fact, this is the way the pattern of the dipole itself is calculated.

There is yet a third pattern (shown in Fig.5.2), also an E plane pattern, in the plane containing their lengths and this can be calculated by a similar process to be:

$$E = \frac{\sqrt{2} \times E_0 \times \sin(\pi/2 \times \cos(\theta)) \times \cos(\pi/2 \times \sin(\theta))}{\cos(\theta)}$$

when the spacing is a half wavelength and is similar, but narrower than the
Practical Wireless, April 1988

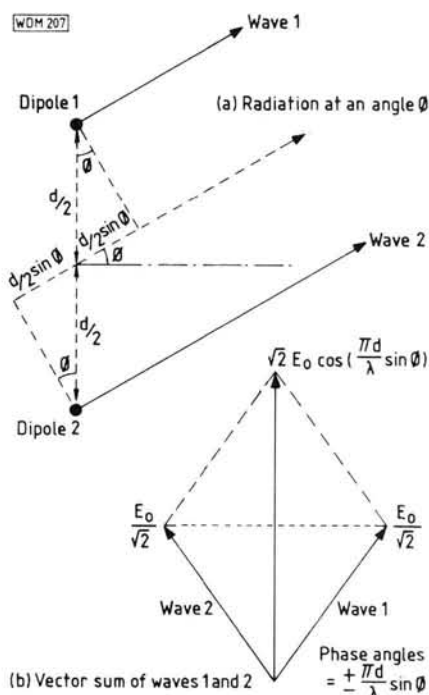


Fig. 5.3: At angles other than 0 degrees, the two waves from the dipoles differ in phase by an amount depending on the angle and spacing. The vector sum of the two waves results in the radiation pattern

dipole pattern. The gain over the dipole is greater than one for values of θ between ± 60 degrees.

We can, of course, get a different pattern by either feeding the array differently or by adopting a different layout. If we reverse the connections to one of the dipoles, then the pattern changes completely. With d a half wavelength, there is no radiation at right angles to the dipoles ($\theta = 0$ or 180) since the waves from the two dipoles are in antiphase in these directions whilst there is now a maximum along the line joining them. The array has become an endfire one and equations for the E and H patterns are given by:

$$E_H = \frac{E_0 \times \sqrt{2} \times \sin(\pi/2 \times \cos(\theta)) \times \cos(\pi/2 \times \sin(\theta))}{\cos \theta}$$

$$E_H = E_0 \sqrt{2} \times \sin(\pi/2 \times \sin(\theta))$$

Another way of arranging the dipoles is to place them in a straight line, referred to as a collinear array, and once again we can feed them either in or out of phase. The radiation patterns are:

Co-phased (fig.5.4)

$$E = \frac{E_0 \times \sqrt{2} \times \cos(\pi/2 \times \sin(\theta)) \times \cos(\pi/2 \times \sin(\theta))}{\cos(\theta)}$$

Anti-phased

$$E = \frac{E_0 \times \sqrt{2} \times \sin(\pi/2 \times \sin(\theta)) \times \cos(\pi/2 \times \sin(\theta))}{\cos(\theta)}$$

In either case, the H plane pattern is, of course, circular. When the dipoles are co-phased, the pattern is identical to that of a full wave dipole fed at the centre.

An interesting case is where the two are fed not quite in phase and the

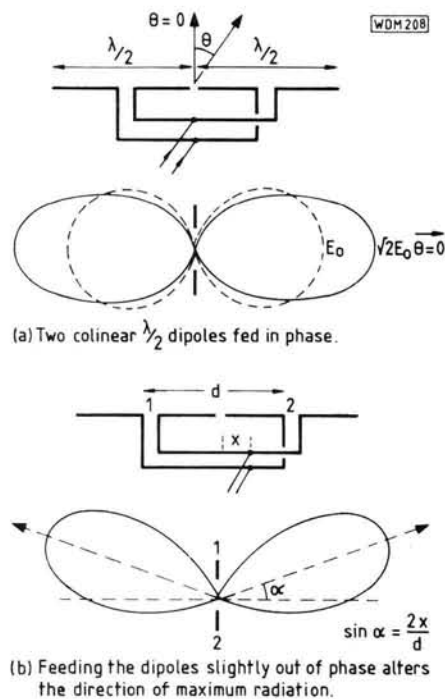


Fig. 5.4: Two collinear dipoles fed in phase have a gain of 2 in the E plane and a pattern which is identical to that of a full wave dipole. The direction of maximum radiation can be altered by moving the feed point

direction of maximum radiation is moved from the direction at right angles to the array as shown in Fig.5.4, when the direction of maximum radiation is moved to a direction given by:

$$\sin \alpha = 2 \times x/d$$

This principle is a very valuable tool for the antenna designer, and can be extended to larger arrays consisting of many elements each of which is fed separately. It can allow the direction of radiation of a short wave array, erected between two fixed masts, to be altered simply by moving the feed point—a practice called slewing. A high power u.h.f. television antenna usually has its maximum radiation directed slightly below the horizontal in order to put the maximum signal into the service area, a technique referred to as beam tilt.

The bigger an array is made, then the greater is its gain and the narrower its pattern. In the case of arrays made up entirely of co-phased dipoles, the greatest gain is n for n dipoles. In the case where the array is built of a number of elements in two dimensions, and where the area occupied is A square metres, then the isotropic gain approaches that we found earlier for an illuminated aperture. It is given by:

$$G = 4\pi \times A/\lambda^2$$

The gain relative to a half wave dipole can be found by dividing this value by 1.64.

There are also some rules which give an approximate idea of the directivity of an antenna in terms of its dimensions when these become fairly large in terms of the operating wavelength. If an array has a particular dimension D

then its pattern in the plane containing D consists of a main lobe and a number of sidelobes separated by minima. The main lobe can be described in terms of the angular width from the direction of maximum radiation to the first of these minima and the relationship between D and angle θ is:

$$\theta = \lambda/d \text{ radians or}$$

$$180 \times \lambda/\pi \times D \text{ degrees}$$

The minima being spaced by approximately half this angle. The points where the gain has dropped to a half of this value (corresponding to a field strength of $1/\sqrt{2}$), occur approximately half way between the direction of maximum radiation and the first minimum. This is shown in Fig.5.5, with the polar diagram plotted this time in linear rather than polar form.

In the examples used previously, each element has been considered as having power applied to it, usually referred to as driven elements. This does not always have to be the case, putting an element reasonably close to one which is radiating will cause a current to flow in the non-driven element and it will then radiate and is referred to as a parasitic element. The magnitude of the current will be very close to that of the driven element for the sort of spacings likely to be used in practice, and the relative phase is determined by the length of the element and the spacing from the driven one.

A well known case is that of the dipole and reflector, where the parasitic element is positioned about a quarter wavelength from the driven one. It is also made slightly longer than


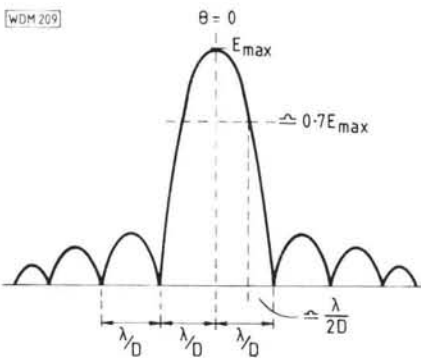


Fig. 5.5: The radiation pattern of a large co-phased array or aperture of length D approximates to that shown here

Fig. 5.6: Radiation patterns of an array consisting of a driven half wave dipole and parasitic reflector spaced by a quarter wave length

a quarter wavelength, the combination of spacing and length aims to make the current in the parasitic lead that in the driven element by 90 degrees. Assuming this to be true, then the E and H patterns are as shown in Fig.5.6. The array is an end-fire one with no radiation in the direction dipole-to-parasite, and maximum forward radiation in the parasite to dipole direction. All power is radiated in the forward direction and the gain rises to 4, which makes this arrangement a compact array with quite high gain. Since the parasitic behaves as if it reflects back-

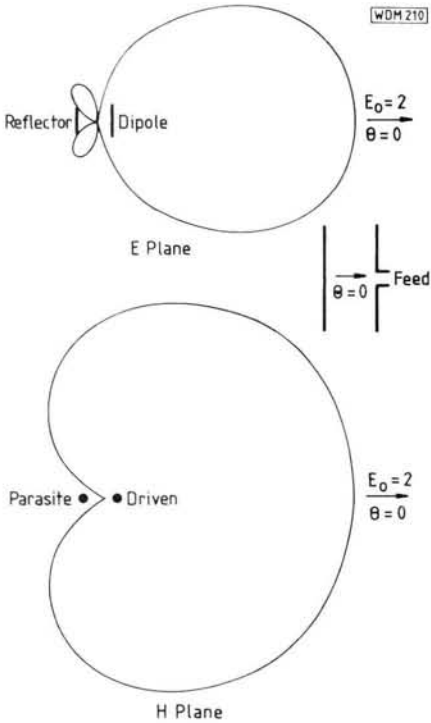

ward radiation in a way which increases the forward signal, it is called a reflector.

More gain can be obtained by adding further parasitic elements, referred to as directors, with spacing and lengths such that there is an increase in radiation in the forward direction. Such an array is, of course, the well-known Yagi.

Control of the radiation pattern is a powerful tool in the hands of the communications engineer, and in the next article we'll see how it is used in the design of a transmission system.

A few errors crept into the February part of Making Waves.

Column 1 should have read:

$$P_r = P_1 \times G_1 \times G_r \times \left(\frac{\lambda}{4\pi \times D} \right)^2$$

and

$$\left(\frac{\lambda}{4\pi \times D} \right)^2$$

And column 2 should have read:

$$P_1 \times G_1 = \frac{P_r}{G_r} \times \left(\frac{4\pi \times D}{\lambda} \right)^2$$

$$P_1 \times G_1 = \frac{(7 \times 10^{-12})}{2860} \times \left(\frac{4\pi \times 3.9 \times 10^7}{0.025} \right)^2$$

Short Wave
Magazine

Short Wave
Magazine

NITON RADIO

The British Telecom radio station at Niton on the Isle of Wight dates back to 1909. Since then it has seen many changes and Elaine Richards looks at its long and varied history.

COMPETITION

Win a Lowe HF-125 short wave receiver worth £375.


REGULARS

Airband, Scanning, Seen & Heard, Grassroots, What Receiver, Bookcase.

REVIEW

Peter Shore looks at the Sony PRO80 hand-held scanning receiver

.....MARCH ISSUE OUT NOW..... MARCH ISSUE OUT NOW.....

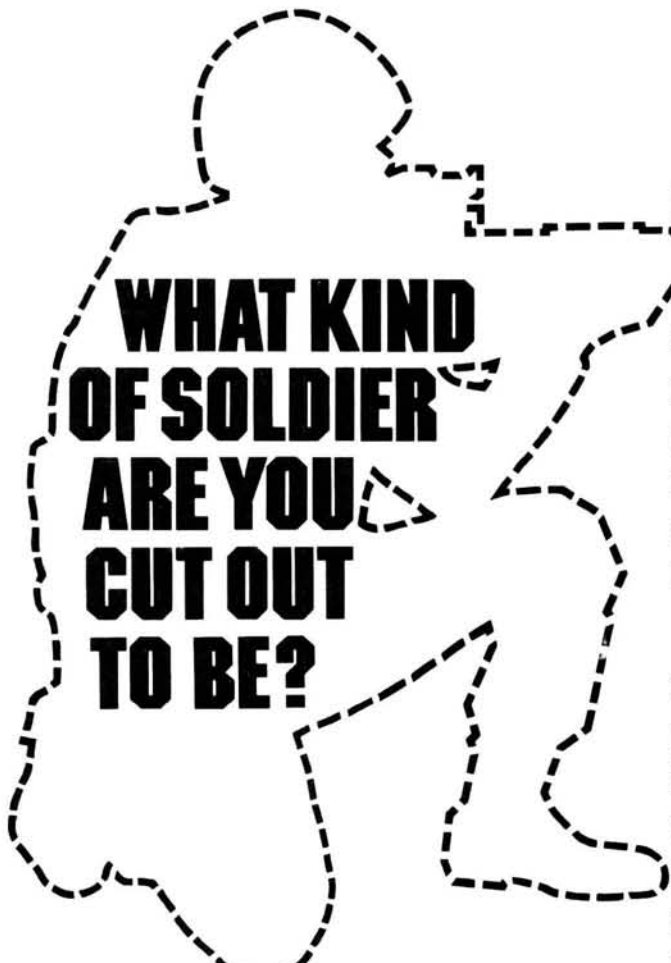

WHAT KIND OF SOLDIER ARE YOU CUT OUT TO BE?

Today's Army depends upon a wide range of very different people, performing highly specialised and individual tasks that add up to the smooth running of one of the world's most modern fighting forces.

Right now, there are vacancies in the highly skilled field of communications and languages, all of which offer good pay and promotion prospects.

But remember, in the Army you're always a soldier first and you'll be trained as such, ready and able to do your job well under combat conditions either at home or overseas if need be.

The Electronic Warfare Operator is employed on an operational task which requires a high degree of proficiency in a nominated language. The work involves the transcription of voice transmissions received through radio receivers and associated electronic equipment. Full training is given in both language and radio skills.

Special Telegraphists are fully trained in the use of sophisticated equipment in the related fields of military communications and communications security. Skills learnt include morse code, teleprinter touch typing and the operating of high grade receivers and direction finding equipment. Other careers in communications include Radio Telegraphist, Data Telegraphist, Radio Relay Operator and Technicians.

Linguists (Special Intelligence) Monitoring, interpretation and analysis of enemy communications could be vital in order to protect British interests throughout the world. As a Linguist you'll receive a comprehensive training in language and analytical skills as well as the operation of sophisticated equipment including automatic data processing.

The Next Step

These are rewarding jobs, calling for a lot of input from you in terms of time and hardwork.

If you think you are cut out to handle them, call in now at any Army Careers Information Office, or cut out the coupon. You'll find us in the phone book under 'Army.'

Please send me more information about E.W. Operators ☐
 Special Telegraphists ☐ Linguists ☐ Other Vacancies ☐
PLEASE TICK.

To SPSO Royal Signals, Directorate of Army Recruiting,
 (Dept PWICO), Room 1106A, Empress State Building, Lillie
 Road, London SW6 1TR.

Name _____

Address _____

Date of Birth _____ Tel: _____

THE PROFESSIONALS

The Armed Forces are equal opportunity employers under the terms of the Race Relations Act 1976

Computing Corner

Our main item this month is a Packet Radio Terminal program for the Amstrad CPC range, sent by Saku OH1KH and modified slightly by myself. I hope I have Anglicised the messages accurately!

Pertii OH2VZ wrote concerning difficulties in contacting the MSX radio software supplier "MSX Software Shack" mentioned in November 1987 *PW*. So far as I'm aware, the information I gave was correct and I hope they answer you soon Pertii, in the meantime all MSX users should find something of interest in the JEP catalogue (1). If anyone does succeed in contacting MSXSS then please let me know, for the benefit of other users. Atari 520/1040ST SSTV decoding seems to be their most recent addition.

An IBM PC and XT "FAX-1" facsimile decoding system has been launched in Italy and published samples seem to be quite impressive. A Meteosat version is available although I'm unsure of the additional hardware required other than the 450K of RAM! The sample Meteosat frame (of Northern Italy under a virtually cloudless sky) is better than most I've seen (2).

Also reaching me from Italy is a

Commodore C64 program to drive the Kantronics Pacterm unit via an RS232 unit. It's a fairly short listing and although all accompanying text is Italian, I'm sure operation will be fairly self-evident. Anyone interested can contact me (3).

P A Electronic Services (4) produce a BBC-B, B+ and Master FAX decoder and software with a variety of options including definition quality and number of colours. I'll be pleased to hear from any users of this system.


Several readers wrote concerning the listing of the AMT-2 "tiny" terminal program for the QL published several issues ago. Although I had not noticed it myself, the line numbers in the published listing were incorrect, causing problems in reproducing it. Anyone having problems is invited to

contact me—I'll willingly supply a fresh listing together with another which might help you too.

John GIFTU informs me that most of his programs should be available in Spectrum Plus-3 formats by the time you read this; Technical Software programs should be available in this format by now too.

And now to the main program listing. This terminal program is designed for use with the Amstrad CPC range, the Amstrad RS232 interface and a TNC2A Packet terminal unit. Doubtless other terminals could be controlled with few, if any, modifications.

The listing is supplied complete, but for convenience you should run the first section to set up and save the machine-code section, and then use DELETE 10-790 to remove the un-

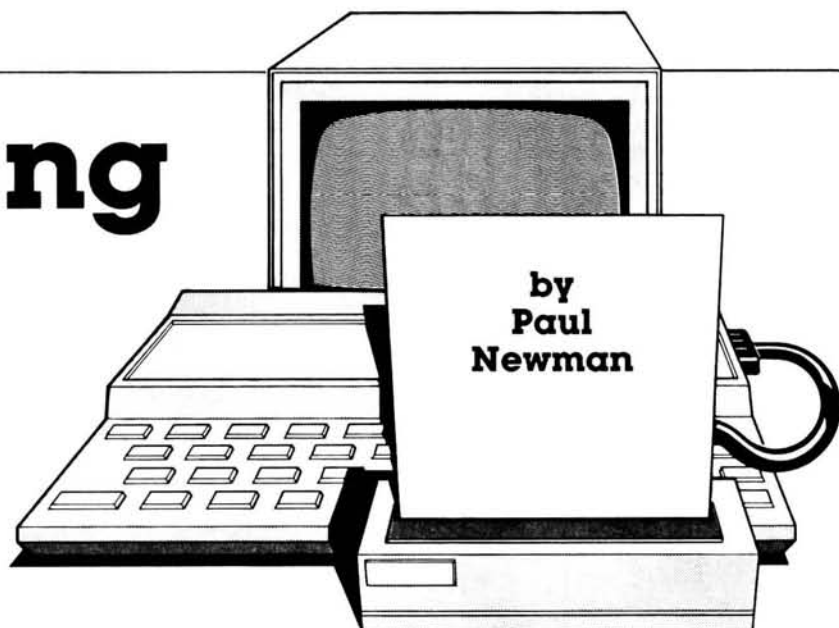

```

10 DATA F3,3E,11,CD,6F,32,21,91,30,CD,55,32,3E,01,CD,5F2
20 DATA B4,BB,26,00,16,4F,2E,00,1E,13,CD,66,BB,3E,02,487
30 DATA CD,B4,BB,26,00,16,4F,2E,16,1E,1B,CD,66,BB,3E,56D
40 DATA 03,CD,B4,BB,26,00,16,4F,2E,15,1E,15,CD,66,BB,52E
50 DATA 21,9B,30,CD,55,32,21,EC,30,CD,17,32,30,FB,21,50F
60 DATA 4A,30,ES,CD,F1,30,C4,1A,31,CD,09,BB,D0,FE,FC,8B7
70 DATA 20,0B,E1,3E,13,CD,6F,32,FB,C9,FE,F3,CA,9D,32,816
80 DATA FE,F1,CA,42,33,FE,F0,CA,F9,33,F5,3E,02,CD,B4,9CB
90 DATA BB,F1,FE,7F,CC,B6,33,C4,0B,31,FE,0D,CC,BA,32,864
100 DATA F5,3E,0A,CD,5A,BB,F1,C3,BA,32,04,02,1C,00,00,5B1
110 DATA 00,10,00,00,FF,50,41,43,4B,45,54,20,52,41,44,3CB
120 DATA 49,4F,20,54,45,52,4D,49,4E,41,4C,20,56,31,2E,3E9
130 DATA 21,20,20,4F,70,74,3A,20,46,49,4C,45,2B,F0,29,45F
140 DATA 20,43,57,49,44,2B,F3,29,20,4D,45,4D,4F,2B,F1,4F2
150 DATA 29,20,45,4E,44,2B,65,73,63,29,20,20,A4,20,4F,3FF
160 DATA 4B,31,4B,4B,20,2D,3B,37,0D,0A,FF,1B,40,1B,3E,392
170 DATA 0D,C5,01,DD,FA,ED,7B,CB,47,2B,03,0B,ED,7B,C1,77D
180 DATA C9,FE,11,2B,12,FE,13,2B,0E,FE,20,30,06,FE,0E,5B9
190 DATA D0,FE,07,0B,CD,5A,BB,C9,32,9C,32,C9,F5,3E,01,855
200 DATA CD,B4,BB,F1,FE,0D,CD,7D,31,CC,A5,31,CD,00,31,853
210 DATA C9,00,00,00,00,00,00,00,00,00,00,00,00,00,00,0C9
220 DATA 00,00,00,00,00,00,00,00,00,00,00,00,00,00,000
230 DATA 00,00,00,00,00,00,00,00,00,00,00,00,00,00,000
240 DATA 00,00,00,00,00,00,00,00,00,00,00,00,00,00,000

```

```

250 DATA 00,00,00,00,00,00,00,00,00,00,00,00,00,00,037
260 DATA 3C,55,41,3E,0D,0A,E5,D5,C5,F5,21,2E,31,11,2D,559
270 DATA 31,01,4F,00,ED,B0,F1,32,7C,31,C1,D1,E1,C9,E5,80F
280 DATA C5,F5,21,2D,31,06,4F,AF,77,23,10,FC,F1,C1,E1,776
290 DATA C9,E5,D5,C5,F5,21,2D,31,3E,2A,06,4F,BE,2B,0B,667
300 DATA 23,10,FA,F1,C1,D1,E1,C9,C5,E5,11,F9,31,01,C6,906
310 DATA 31,C5,1B,14,11,07,32,01,D1,31,E1,E5,C5,1B,09,517
320 DATA 11,0D,32,01,F2,31,E1,E5,C5,01,09,00,1A,ED,A1,5B1
330 DATA E2,E7,31,C0,13,1B,F6,C1,E1,E5,CD,17,32,3E,0A,7CD
340 DATA CD,5A,BB,E1,C1,CD,94,31,1B,8D,2A,2A,2A,20,43,6CC
350 DATA 4F,4E,4E,45,43,2A,2A,2A,20,44,49,53,43,4F,4E,3D1
360 DATA 2A,2A,2A,20,4C,49,4E,4B,45,44,7E,E5,F5,FE,07,5B2
370 DATA 2B,05,CD,2B,BD,30,36,F1,E1,23,FE,0D,20,ED,3E,693
380 DATA 0D,CD,2B,BD,30,F9,3E,0A,CD,2B,BD,30,F9,37,C9,711
390 DATA 0D,0A,50,72,69,6E,74,65,72,20,69,73,20,6F,66,4EC
400 DATA 66,6C,69,6E,65,21,20,20,07,0D,0A,FF,E5,F5,1B,57E
410 DATA 0B,3E,02,CD,B4,BB,21,3A,32,7E,23,FE,FF,C4,5A,6CD
420 DATA BB,20,F7,F1,E1,37,3F,C9,C5,F5,01,DD,FA,ED,7B,9DA
430 DATA CB,57,2B,FA,F1,0B,ED,79,C1,C9,7E,FE,FF,C8,CD,A40
440 DATA 6F,32,23,1B,F6,F5,3A,9C,32,FE,13,2B,06,F1,CD,6CC
450 DATA 6F,32,37,C9,F1,37,3F,C9,11,E5,D5,C5,F5,21,CF,846
460 DATA 32,CD,B0,32,11,6B,10,21,DF,32,7E,23,47,FE,FF,651
470 DATA 2B,10,D5,1B,7A,B3,20,FB,D1,10,F7,3E,44,CD,6F,706
480 DATA 32,1B,E9,21,DA,32,CD,80,32,F1,C1,D1,E1,C9,13,81F
490 DATA 03,0D,03,43,41,4C,49,0D,4B,FF,51,4B,0D,11,FF,43C

```


wanted section. Alter the commented lines with your own details and save the resulting BASIC under a suitable name.

Switch off completely and make sure the RS232 and Packet units are connected. Switch on and enter RUN "Packet" (or whatever name you chose). This should load the BASIC followed by the machine-code. If the printer is not online, you will be reminded until it is so before you can proceed further.

Typed text appears in the bottom section of the screen beneath the reminder line whilst received text is scrolled in the top section. The display is in 80 column mode. Controls (other than normal character-keys and "control" keys) are:

The up-arrow cursor key will make the program ask for a filename to be loaded from disc. This must be an ASCII-file otherwise a "bad command" error will be given. If present the file will be read and sent to the terminal unit. To illustrate this, do SAVE "PACKET.ASC". After you have saved the original listing. Giving this filename at the prompt will send the program-listing to the terminal unit. ASCII-files with embedded control characters are liable to cause bizarre results or even crashes so beware.

The down-arrow cursor key will prompt you for a memo message of less than 80 characters. Any message entered will be sent to the printer allowing you to make notes during use. The CLR key aborts this and the DEL key operates.

The right-arrow key sends a c.w.-id although I'm unsure exactly how this operates.

Pressing F-keys 3 or 6 will place the stored message into the transmit area. Similar messages can be placed into the other keys by editing the original listing. In this case don't forget to add a linefeed to each—see the original listing.

The program could also be used with most intelligent terminals, for RTTY for example. I tested the program by connecting my Spectrum Plus-3 to the Amstrad serial unit and LISTING a program which was displayed on the Amstrad monitor. Similarly, any terminal unit which sends and receives ASCII will operate satisfactorily. In this case other serial speeds and bit formats (5,6,7 or 8 bits; parity, etc.) can be set with the SETSIO line in the main listing; the Amstrad serial interfaces' operating manual explains this.

The Listing

In forthcoming articles, I hope to be covering the use and programming of one of the latest "intelligent" terminal-units including, I hope, FAX reception. I shall attempt to cover its use with a variety of micros in the hope that this will enable users of most leading machines to extend operation into the areas without having to wait for hard-to-get software.

Some time ago, I received a sample of a ZX81 "Comlink" which gives a ZX81 the ability to communicate with

modems and packet-radio terminal units. Unfortunately, the volunteer was unable through pressure of work to carry out the promised review. If you would like to help my carrying out a review then please write to me at the address below. I'll be happy to cooperate in the writing of course. I feel that the ZX81 is under-estimated and could still fulfill a useful role in the shack.

I recently received advance information of an entirely software based Packet system for the Spectrum computer and hope to be able to review this soon. Also promised was information on a Spectrum picture system that "will beat most SSTV systems" (their words not mine!). More news next time I hope.

Finally, thank you all for your letters over the past months. I'm pleased that these articles are found useful. If you have any ideas for features that you would like to see, then please write in either direct or via Practical Wireless Editorial office. 73 until next time.

References

1. JEP Electronics, New Road Complex, New Road, Kidderminster DY10 1AL. SAE for catalogue.
2. R Fontana, Str. Ricchiardo 13, 10040 CUMIANA (TO), Italy.
3. Paul Newman G4INP, 3 Red House Lane, Leiston, Suffolk IP16 4JZ. SAE with all enquiries please.
4. P A Electronic Services, 464 Whippendell Road, Watford, Herts WD1 7PT.

```

500 DATA 0A,03,01,03,01,03,03,01,01,01,01,01,01,03,022
510 DATA 01,01,03,01,03,01,03,01,03,03,01,01,01,03,01D
520 DATA 03,01,01,01,01,01,01,01,FF,0D,0A,45,6E,74,65,2AC
530 DATA 72,20,75,72,20,4D,53,47,20,2B,6D,61,7B,20,3B,466
540 DATA 30,20,63,6B,72,2E,43,4C,52,20,74,6F,20,61,62,4B2
550 DATA 6F,72,74,2E,2E,2E,20,44,45,4C,20,62,61,63,6B,4B5
560 DATA 73,70,63,2E,29,3A,0D,0A,FF,AF,32,CB,33,E5,C5,673
570 DATA F5,3E,13,CD,BA,32,3E,02,CD,B4,BB,3A,CB,33,FE,77E
580 DATA 00,20,05,21,06,33,1B,07,FE,01,20,36,21,C9,33,310
590 DATA CD,55,32,CD,94,31,21,2D,31,06,4F,CD,09,BB,30,57B
600 DATA FB,FE,10,2B,1F,FE,7F,2B,2C,FE,0D,CD,5A,BB,77,7B5
610 DATA 2B,03,23,10,EB,21,2D,31,3A,CB,33,FE,00,CC,17,4DB
620 DATA 32,FE,01,CC,01,34,CD,94,31,3E,0A,CD,5A,BB,3E,62C
630 DATA 11,CD,BA,32,F1,C1,E1,C9,7B,FE,4F,30,C2,2B,04,7DC
640 DATA CD,B6,33,1B,BB,F5,3E,0B,CD,5A,BB,3E,20,CD,5A,72B
650 DATA BB,3E,0B,CD,5A,BB,F1,C9,00,47,69,76,65,20,66,6AE
660 DATA 69,6C,65,6E,61,6D,65,20,74,6F,20,73,65,6E,64,5AB
670 DATA 2E,2E,61,73,63,69,69,20,6F,6E,6C,79,20,2B,43,4D2
680 DATA 4C,52,20,61,62,6F,72,74,29,3A,20,FF,3E,01,32,4C9
690 DATA CB,33,C3,46,33,3E,0A,CD,5A,BB,3E,0D,CD,5A,BB,6BE
700 DATA 3E,11,CD,6F,32,3E,4F,90,47,11,46,34,CD,77,BC,5AC
710 DATA CB,30,25,CD,80,BC,30,20,F5,CD,F1,30,C4,1A,31,76B
720 DATA F1,CD,BA,32,30,F3,F5,3E,02,CD,B4,BB,F1,CD,5A,926
730 DATA BB,CD,09,BB,30,DF,FE,10,20,DB,CD,7D,BC,C9,00,833
740 N=15:A=&3000:L=10:WHILE L<740:GOSUB 750:WEND:GOTO 790

```

```

750 CS=0:FOR X=1 TO N:READ V#:V=VAL("&"+V#):POKE A,V
760 CS=CS+V:A=A+1:NEXT:READ C#:C=VAL("&"+C#)
770 IF C<>CS THEN PRINT" DATA ERROR IN LINE",L:END
780 L=L+10:RETURN
790 SAVE "packet.bin",B,&3000,&450:STOP
800
810 KEY 139,CHR$(10)+CHR$(13):REM <ENTER> defined as <lf> <cr>
820
830 KEY 131,"My name is xxxx, qth is yyyy ZZ99ZZ."+CHR$(13):REM
Your name/qth etc on F3-key
840
850 KEY 134,"Hr: IC730/dipole (80w)" +CHR$(13)+ "TNC2a/Amstrad CFC
612B micro program by DH1KH"+CHR$(13):REM details on F6-key
860
870 KEY 130,CHR$(13)+CHR$(13)+CHR$(13)+CHR$(13)+CHR$(13)+
CHR$(13)+CHR$(13)+CHR$(13):REM F2-KEY gives 8 linefeeds to clear
bottom screen area.
880
890 ----- load MC -----
900
910 MEMORY &2FFF:LOAD"packet.bin",&3000
920 !SETSIO,300,300,0,8,0,2
930 ON BREAK CONT
940 CALL &3000
950 CLS

```

YOUR ONE SOURCE FOR RADIO

ARROW

THE NAME YOU CAN TRUST FOR PRICE & AFTER SALES SERVICE

ELECTRONICS,
LIMITED
5, The Street,
Hatfield Peverel,
Chelmsford, Essex

FOR IMMEDIATE DESPATCH
phone with your Access, Eurocard,
Mastercharge or Visa number to

0245 (Chelmsford) 381673 or 381626
Telex 995801 (ref. AS)

ALL THE
TOP BRANDS
AT
UNBEATABLE
PRICES

IT WILL
PAY YOU
TO PAY
US A
VISIT!



NEW!! The Amazing KENWOOD RZ-1

Covers 500KHz to 905MHz in a CAR-RADIO format!! Send SAE for details — see it at ARROW's Rally stand. Approx. £500.00. Orders for first batch being taken now!



Priced at an economical
£862.00

KENWOOD's New HF Transceiver has all fibre-glass PCB's & opens like a book for easy servicing — our service Dept. love it — so will you!



NOW AVAILABLE

KENWOOD's NEW MINI's for 2m & 70cms FM. Easy of use & full size battery are excellent features.

TH25E £258 TH45E £ TBA

STOP PRESS . . . Send SAE for details of the IP-100 Mini Fax — Facsimile transceiver for mobile — even portable use!



NEW MODEL ARRIVES!!

Superb HF Mini at a staggering price

ONLY £659.00

Limited quantities only at present — order now.



NEW Model has Full Duplex and comes with 2M & 70cms as standard. Options: 6M & 1296MHz! TV module etc. etc . . .

BASIC MODEL £1550

The best selling 2M handy World-Wide! These super transceivers are available from stock.

FT23R £223.50 (+ Batts)

FT73R £243.50 (+ Batts)


NEW FROM YAESU ROTATORS
G400RC, G600RC, G800SDX
NOW IN — DETAILS SEND SAE



This superb receiver — far more than a scanner will really complement your shack.

£869.00 FOR CASH/COLLECTED

Full range of Active Antennas available from stock, Discones, etc. incl. AH7000 £82.00



Best selling HF Mini transceiver in the UK.

SUPERB VALUE AT

£859

for Cash/Collected.



A truly excellent 2M FM mobile transceiver, with receive capability 138-174MHz

GREAT VALUE AT

£329.00

Cash/Collected

ICOM

COMPLETE RANGES STOCKED OF ALL MAJOR BRANDS

PLEASE SEND S.A.E.
WITH ALL ENQUIRIES

BUTTERNUT (USA) ANTENNAS

HF2V 80M + 40M Vertical **£139.95**
HF6V 6 Band Vertical **£154.65**
TBR160 Top Band Coil **£55.24**
STR2 Radial Kit **£45.00**

NEW HF5B

5 Band Mini Beam
only 12"6 W x 6"

£235

NOW IN STOCK

SCOTTISH CUSTOMERS
PLEASE NOTE OUR
NEW GLASGOW ADDRESS

ARROW ELECTRONICS (SCOTLAND)
UNIT 17, 6 HARMONY ROW,
GOVAN, GLASGOW, G51 3AD

Tel: Jim McIlaverty

041 445 3060

Monday to Friday 8.30 — 5.30

Saturday AM by appointment



CASH PRICES??

This Advert is prepared two months before you read it. If anybody else is selling cheaper — just give ARROW a ring (any branch) for our LATEST price!!

DAIWA RANGE

MR750E Multitorque Rotator **£245.00**
MR750PE ditto + preset cont **£278.00**
MR300E High Speed VHF rotator **£243.00**
LMC Lower Mast Clamps **£18.00**
MR750U Motor unit **£75.00**
MR300U Fast motor unit **£75.00**
KS065 Mast Bearing **£35.00**

(Meters are Crossed needle type)
CN410M 3.5-150MHz SWR/PWR **£58.00**
CN450M 140-450MHz SWR/PWR **£62.00**
NS448 900-1300MHz SWR/PWR **£86.00**
MS660PA 1.8-150MHz SWR/PEP + RMS
& Averaging meter **£115.00**

30/300 3 kW **£55.00**
U66VN 140-525MHz (NS660P)
CNW727 Dual Band Aerial Tuner & SWR PWR Meter **£110.00**

PS310M 30 Amp PSU Var. Volts **£199.00**
PS120XM 3.15v Var. 12 Amp. PSU **£99.00**
CL680 Antenna Tuner **£99.95**

CS401 4 way Antenna Switch **£59.50**
CS201 2 way Antenna Switch **£21.90**
CS201G 2 way Antenna "N" Switch **£35.00**
CS4 4 way Ant. Sw. BNC **£30.00**

SAGANT

SA450 2 way Antenna Switch SO-239 **£21.05**
Super Rod 2 for 2M BNC **£12.95**
Super Rod 2 for 70cms BNC **£12.95**
BL40X HF Balun **£19.50**

ALINCO

ELH2300(II) 2M Linear 2 in 30 outw. pre-amp **£89.95**
ELH2600 1.5w in up to 60W out with pre-amp **£109.00**

CUT PRICE TONNAS

Complete range is over 125 antennas & accessories. Price list + new Catalogue (send SAE please)

2 Metre Beams — "N" Sockets

9 E1 Yagi **£29.75**
9 E1 Crossed **£54.25**
17 E1 Yagi **£58.00**

70cms Beams — "N" Sockets

9 E1 Yagi **£27.00**
19 E1 Yagi **£32.00**
21 E1 Crossed — not "N" Socket **£38.00**
21 E1 Yagi **£42.00**
21 E1 (ATV) **£42.50**

2M + 70cm Combi Yagi **£38.00**
27/28MHz 3 E1 Beam **£90.00**
934MHz Beam 13 Element "N" **£20.00**

Splitters, Couplers, Multi-stacking frames available to order

NEW RANGE COMET AERIALS

CA1243E Dual Band Base ant. 70 & 23cm **£39.83**
CA207TMA Mini Heavy duty mobile 2+70 **£30.20**
CA285E 5/8 wave 2m mobile **£15.00**
CA2x4FX 2+70 fibreglass Base ant. **£52.50**
CA2x4JR 2+70cm mini mobile ant. **£24.22**
CA2x4SDY Ultra mini 2+70 mobile ant. **£14.40**
CA2x4SHP Hi-gain Dualbander 2+70 Base **£69.00**
CA2x4WX Dual Band Base ant. 2+70 Hi-G **£74.00**
CA2x4Z Ultra Hi Gain 2+70 Base ant. **£91.90**
CA412NN Duplexer for 23cm + 70cm **£31.74**
CAABC21 5/8 Wave ground plane Base 2M ant. **£24.50**

CAABC22A 5/8 + 5/8 2M Base ant. Ally. **£36.00**
CA ABC23 3 x 5/8 Wave 2M Base ant. **£59.50**
CASUS22A Stainless Steel 2M 2x5/8 Base **£52.50**
CAABC71 70cm ground plane Base ant. **£21.56**
CAABC72 2 x 5/8 wave 70cm Base ant. **£33.00**
CAMSS8 Magnetic mount PL259 type **£18.20**
CA2x4Mini 2M + 70cm Mini Mobile ant. **£15.89**
CARS2 Gutter Mount De-Luxe **£10.65**

For detailed spec. sheets on COMET send SAE please.

PACKET RADIO

Kantronics KAM **£298**
Kantronics KPC1 **£159**
Now available from stock.

Details on "Packet" (article) send 2 x 18p stamps.

INTEREST FREE FINANCE

Many major items at Recommended Retail Price + carriage, are available on our FREE credit scheme. List of eligible items on request.

20% down Balance over 6 months.

1/3rd down Balance over 9 months.

50% down Balance over 12 months.

Competitive Finance available with 10% deposit/Part exchange as deposit — balance over up to four years. Written details on request.



ALL MAIL ORDERS TO
CHELMSFORD
OFFICE

Our normal despatch is one or two days (as thousands of satisfied customers will tell you). Subject to manufacturers supplies being available. Access and Barclaycard accepted. Save time — phone over your order with your Access or Barclaycard number.



Only a few showrooms in the U.K. can offer ALL MAJOR BRANDS as FRANCHISED DEALERS. Our main showrooms are only 10 minutes from the M25 Outer London Motorway (Take the A12 dual carriageway — just past Chelmsford) (British Rail Hatfield Peverel 3 mins.) Free car parking. Monday to Saturday 9-5pm. Closed all day Thursday.

GLASGOW SHOP
041 445 3060


North West Agent — Jim Cook
(Wigan) 0942 214969

Leicester Agent — Alan Faint
(Market Harborough) 0858 62827

North Wales Agent — John Lewis
(Anglesey) 0248 714657

Constructional

This latest project from The Kanga Gang takes a novel and elegant approach to a problem that has dogged home constructors for years, that of accurately displaying a transmitter's or receiver's operating frequency, while taking into account almost any i.f. offset frequency.

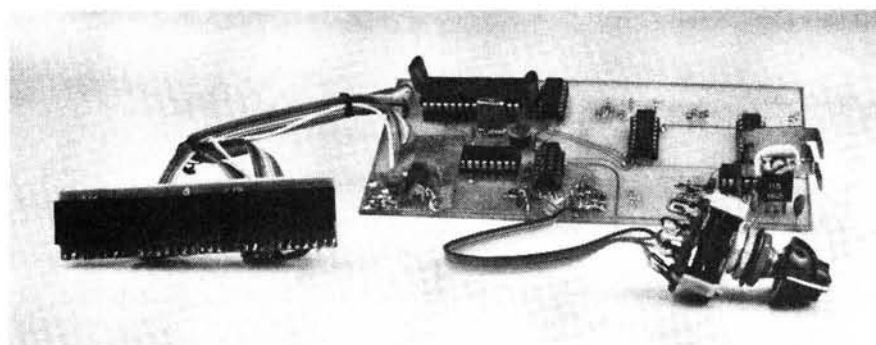

Digital dial prototype, note that IC1,2 must not be mounted in sockets as this will affect their h.f. performance

A Less Complex Digital Dial

The two biggest problems when designing a new transceiver are a suitable gearbox to reduce the tuning rate and an accurate method of displaying the frequency being used. This article concerns the digital dial that formed part of an all-band, all-mode QSK transceiver which has been constructed by several members of the Gang. It has saved the immense amount of work generally associated with making a complete pre-settable counter assembly, and hopefully through its publication it will save someone else going to all that trouble as well.

When we first came across the need for the digital dial we thought the

device used in the older Yaesu models could be used. This was a complete pre-settable counter chip, but on investigation it was found that the hundreds of kHz digit was unpre-settable. This did not matter in Yaesu gear due to the odd i.f. used, but in our rig using 9MHz it was imperative. Many hours were spent trying to trace a suitable device but without any luck, so in the end we decided to revert to the pre-settable counter... Then the old brain box started to work.

In the majority of designs the local oscillator is run h.f. of the signal frequency to avoid various problems.

It is therefore necessary to subtract

the i.f. frequency from the oscillator frequency. Standard counter chips such as the MSL7216 work up to 10MHz but without offset facility. What if we were to "swallow" the i.f. frequency from the input frequency and only allow the remainder to reach the 7216? In effect we would display the received frequency. With a simple bit of logic decoding we would be able to change the "swallowed" chunk of signal to suit the mode in use, i.e. 9.0015MHz for l.s.b., 8.8993 for c.w., 9.0000 for f.m. and a.m., and 8.9985 for u.s.b.

The resulting circuit is far more compact and simple than the pre-settable counter would have been and not a very great difference in price. The big problem at the time of writing was the 7216, but Maplin Electronics came to the rescue here with the 7216D. Although this device is relatively expensive, it proved a worthwhile investment, making the finished project reasonably compact and uncomplicated.

Swallow Counter

The problem in "swallowing" the i.f. offset frequency was that we had to have the swallow counter synchronised with the main counter. In other words when the counter wanted to start counting the input signal to the swallow counter had to start from all zeros.

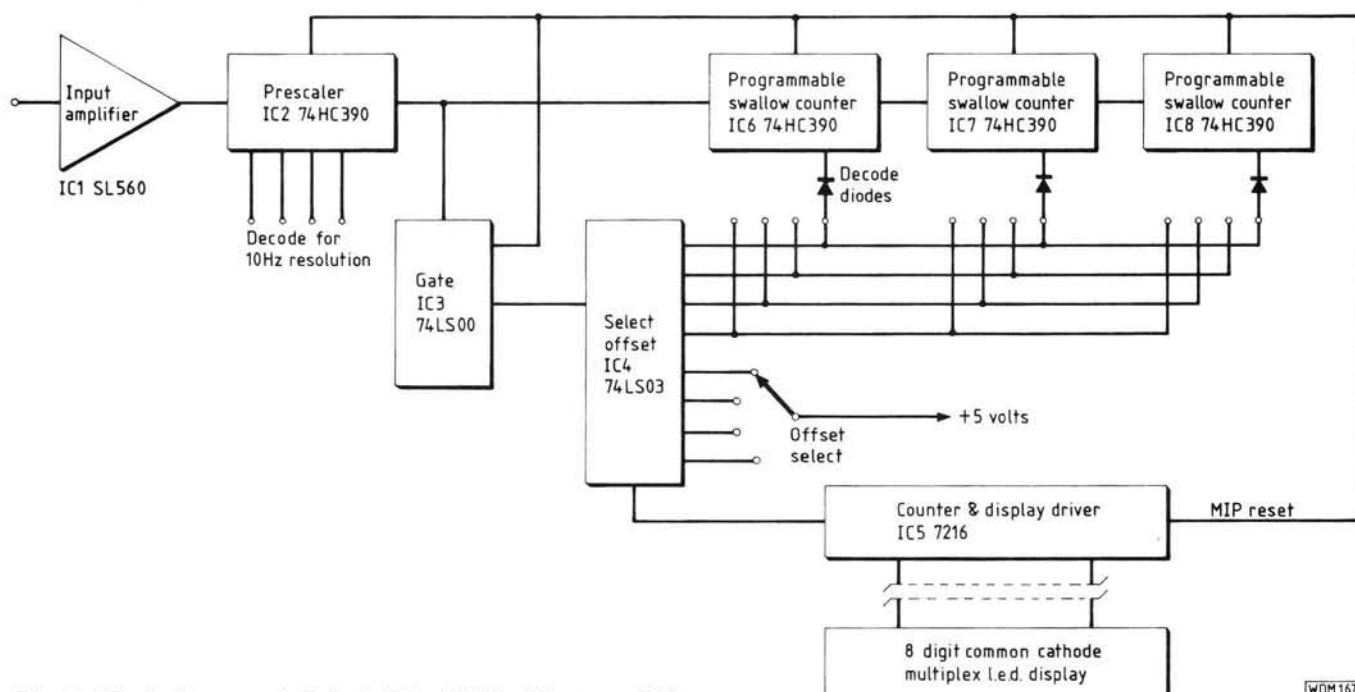


Fig. 1: Block diagram of digital dial with i.f. offset capability

Luckily for us the designer of the 7216 decided that it would be a good idea to have an output so that external circuitry could be synchronised. This output is called the MIP, or measurement in progress output. This pin is at zero volts when the main counter is in the count mode and at 5 volts when in the waiting mode.

If this MIP line was connected to the reset lines of the swallow counter, the counter could only count when the MIP line was low and would be reset to zero when the 7216 finished its count.

Having outlined that action we will jump to the input of the counter. The input signal varies between 11.8MHz when the set is on 1.8MHz (160m) and 39MHz when on the top range of 28MHz (10m). The amplitude of the signal to be counted is no problem as it comes from the local oscillator but the frequency range is fairly large. To make the interface problem as simple as possible we have used a SL560 wideband amplifier, and with the devices used so far these give reliable output to above 40MHz. This signal is divided by 10 using one half of a 74HC390. The resulting signal is then passed to the swallow counter and via the gating circuit to the main counter. We started off requiring to swallow 9 001 500 pulses (in the l.s.b. mode), but having prescaled by 10 it is now 900 150 pulses. But because we are going to run the 7216 in the 100ms count-period mode, the number of pulses have again been reduced by a factor of ten leaving a swallow count of 90 015.

As mentioned earlier at the beginning of the count period the signal is passed to the swallow counter but inhibited from the 7216 main counter. Both counters are at zero. When 90 015 pulses have been fed into the swallow counter a pulse is generated by the diode AND gate on the swallow counter "Q" outputs, this pulse is used

Fig. 2: Circuit diagram with simplified display detail, note that digit 0 output from IC5 (Fig. 5) is connected to the least significant (right hand) figure of the 8-digit display

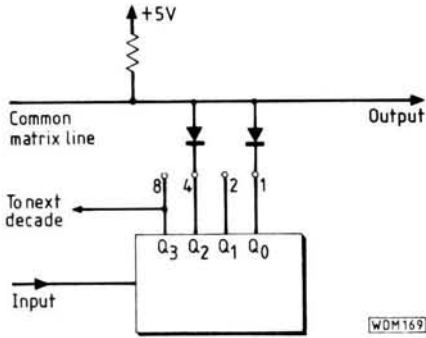
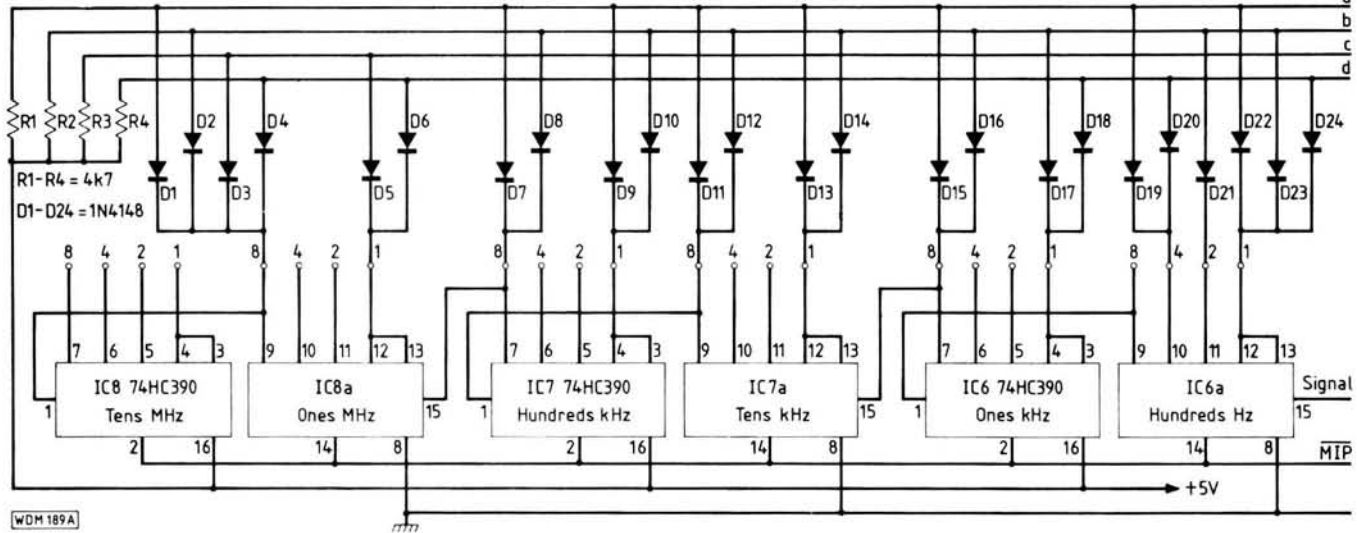


Fig. 3: Example of decoding "5" using decade counter

to switch the signal into the main counter. At first it was thought necessary to inhibit the signal to the swallow counter, but it was soon realised that this was not necessary as any further pulses would have no effect on the gate circuitry. The remaining pulses are counted by the main counter and will display the received frequency. The 74LS03 wired OR gate is used to select the required offset for the mode in use by selecting the correct pulse from the diode matrix.

Provision for four offsets is provided and in many cases this will be too many. If one of the unused offsets is gated for zero offset by not including any diodes the counter will read the input frequency. If the unit is included in a transceiver it would be worthwhile including an input on the front panel to enable the counter to be used as a piece of test equipment when not being used on the air. Although it only has a resolution of 100Hz, this is often sufficient in amateur shacks.

Adjustable Offsets

The diode matrix has been drilled for the Kanga transceiver offsets, but room has been left for any offset right up to 40MHz. All that is necessary is to include the diodes in each decade to select the figure required. If, for example, the figure 5 is required, insert one diode cathode into 4 and another into 1, with the anodes connected to the common matrix line. The figure 5 will then be selected for that decade. Other

Table 1: Binary coded decimal truth table

Input pulses	8 Q ₃	4 Q ₂	2 Q ₁	1 Q ₀
0	0	0	0	0
1	0	0	0	1
2	0	0	1	0
3	0	0	1	1
4	0	1	0	0
5	0	1	0	1
6	0	1	1	0
7	0	1	1	1
8	1	0	0	0
9	1	0	0	1

offsets can be catered for, by connecting extra diodes between the common matrix lines and each of the required decades.

Clarification of Switching Pulse Generation

A single decade of the swallow counter is shown in Fig. 3, at the commencement of the count all the "Q" outputs are at zero. The diodes are therefore all conducting and the output is at about 0.5 volts, logic 0. As pulses arrive the outputs change state as shown in Table 1. As shown in Fig. 3, two diodes are connected, one on "Q₀" and the other on "Q₂". On arrival of the first pulse "Q₀" goes to logic 1 but although diode 1 stops conducting, diode 2 is still conducting so the output remains at logic 0. On arrival of the second pulse "Q₀" goes logic 0 but "Q₁" goes logic 1; both diodes are still conducting so the output remains at logic 0. On arrival of the third pulse both "Q₀" and "Q₁" are at logic 1 and diode 1 stops conducting, but diode 2 is still conducting, holding the output at logic 0. On arrival of the fourth pulse "Q₀" and "Q₁" go to logic 0 but "Q₂" goes to logic 1; diode 2 stops conducting but still the output stays at logic 0 as now diode "1" is conducting.

(Where the heck is all this leading?) On arrival of the fifth pulse (ah! here it is!) "Q₀" goes to logic 1, "Q₁" goes to logic 0 and "Q₂" goes to logic 1; both

AMATEUR HF BEACONS

The beacons shown on the chart can provide an excellent clue to band conditions hour by hour, and are a valuable aid to propagation research. Many of the beacons are coordinated under the auspices of the International Amateur Radio Union (IARU) in the International Beacon Project (IBP).

Most operational beacons transmit continuously, identifying themselves by means of their callsign, keyed in slow Morse. The majority use on/off keying (mode A1A), but some use frequency shift keying or f.s.k. (mode F1A). Tuning a receiver to the "wrong" side of an f.s.k. signal produces unreadable Morse characters, as it is the spaces which will be heard, rather than the marks of the signal. By adjusting the receiver tuning so that the pitch of the received note falls, a different received note will be heard filling the gaps in the first signal. This new note is the correct signal, which can be tuned for a comfortable listening pitch.

Many beacons in the USA's sphere of influence include the suffix /B or /BCN at the end of their callsign.


The output power of each beacon may be anything from one or two watts upwards, generally to an omni-directional antenna, though a few beacons use directional antennas. World-wide reception of operational beacons cannot therefore be expected, even under favourable propagation conditions.



Frequency (MHz)	Call sign	Location
10.144	DK0WCY	New York
14.100	4U1UN	Tel Aviv
14.100	4X4TU	Funchal
14.100	CT3B	Ise City
14.100	JA2IGY	Honolulu, Hawaii
14.100	KH6O	Buenos Aires
14.100	LU4AA	Espoo
14.100	OH2B	Stanford, CA
14.100	W6WX	Pretoria
14.100	ZS6DN	Sao Paulo
28.050	PY2GOB	Ottawa
28.175	VE3TEN	Bologna
28.195	IY4M	Crowborough
28.200	GB3SXE	St Petersburg, FL
28.200	KF4MS	Buenos Aires
28.201	LU8ED	Durban
28.2025	ZS5VHF	Mt Predigtstuhl
28.205	DL0IGI	Venice, FL
28.2075	W8FKL	Marlboro, MA
28.208	WA1IOB	Tamarin Fall
28.210	3B8MS	

Frequency (MHz)	Call sign	Location
28.210	K4KMZ	Elizabethtown, KY
28.212	ZD9GI	Gough Island
28.212	EA6RCM	Palma, Majorca
28.215	GB3RAL	Slough, Berks
28.215	LU4XI	Cape Horn
28.217	WB9VMY	Oklahoma City
28.220	5B4CY	Zyri, Cyprus
28.222	W9UXO	Chicago, IL
28.2225	HG2BHA	Tapolca, Hungary
28.2275	EA6AU	Palma, Majorca
28.230	ZL2MHF	Mt Climie
28.232	KD4EC	Jupiter, FL
28.232	W7JPI	Sonolita, AZ
28.235	VP9BA	Hamilton, Bermuda
28.2375	LA5TEN	Oslo
28.240	5Z4ERR	Kilambu, Kenya
28.240	OA4CK	Lima, Peru
28.242	LU4FM	Rosario
28.2425	ZS1CTB	Cape Town
28.245	A92C	Bahrain
28.247	EA3JA	Barcelona

Frequency (MHz)	Call sign	Location
28.248	K1BZ	Belfast, ME
28.250	4N3ZHK	Mt Kum, Yugoslavia
28.250	Z21ANB	Bulawayo
28.252	WB4JHS	Durham, NC
28.253	OH2TEN	Finland
28.255	LU1UG	General Pico
28.257	DK0TEN	Konstanz
28.260	VK5WI	Adelaide
28.262	VK2RSY	Dural, Nr Sydney
28.264	VK6RWA	Perth, WA
28.266	KB4UPI	Birmingham, AL
28.266	VK6RTW	Albany, WA
28.268	VK8VF	Darwin
28.2685	W9KFO	Eaton, IN
28.270	VK4RTL	Townsville
28.270	ZS6PW	Pretoria
28.272	9L1FTN	Freetown
28.275	AL7GQ	Jackson, MS
28.277	DF0AAB	Kiel
28.280	LU8EB	Buenos Aires?
28.280	YV5AYV	Caracas

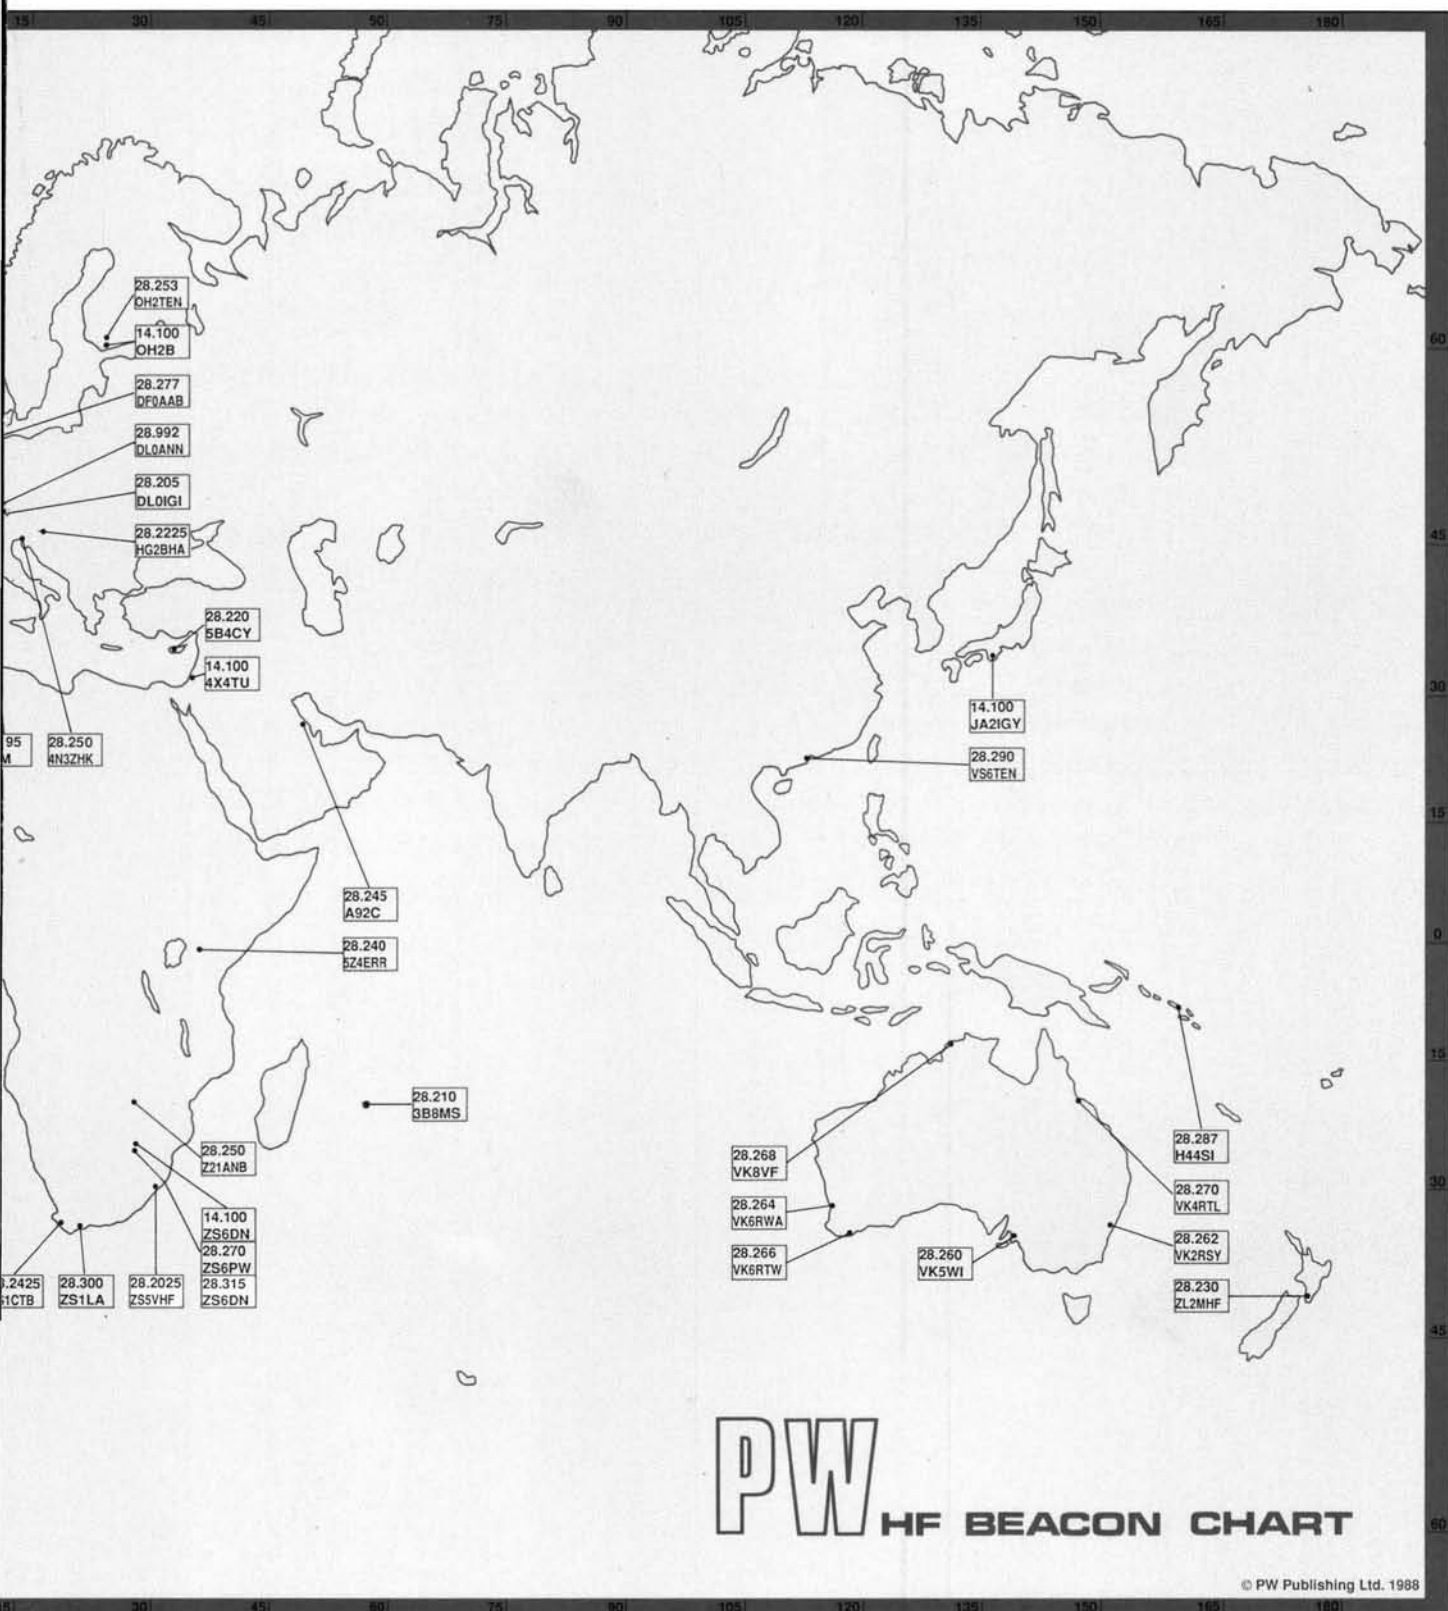

Frequency (MHz)	Call sign	Location
28.281	VE1MUF	Newfoundland
28.284	VP8ADE	Adelaide Island
28.286	KA1YE	Rochester, NY
28.287	H44SI	Honiara, Solomon Is
28.287	W8OMV	Ashville, NC
28.288	W2NZH	Moorestown, NJ
28.290	VS6TEN	Mount Matilda, HK
28.292	LU2FFV	San Jorge
28.295	WB4DJS	Ft. Lauderdale
28.295	WB8UPN	Cincinnati
28.296	W3VD	Laurel, MD
28.299	PY2AMI	Sao Paulo
28.300	VE2MO	Quebec
28.300	ZS1LA	Still Bay
28.301	VE2HOT	Quebec
28.315	ZS6DN	Irene
28.888	W9IRT	Hollywood
28.890	WD9GOE	Freeburg, IL
28.992	DLOANN	Mt Moritzberg

14MHz (20m) BEACON CHAIN

The chain of beacons on 14.100MHz, sponsored and supported by the Northern California DX Foundation (NCDXF), transmit in sequence every 10 minutes as shown below, commencing on the hour, then at H+10min, H+20min, etc.

Time	Call sign	Location
T+0min	4U1UN	New York
T+1min	W6WX	Stanford, CA
T+2min	K6HO	Honolulu
T+3min	JA2IGY	Ise City
T+4min	4X4TU	Tel Aviv
T+5min	OH2B	Espoo
T+6min	CT3B	Funchal
T+7min	ZS6DN	Pretoria
T+8min	LU4AA	Buenos Aires
T+9min	Silent	Reserved

NOTE: The frequency 21.150MHz is reserved for a similar chain of beacons to be established in the 15m band.

ABOUT THIS CHART

This chart shows the operating frequencies and callsigns of all beacons which may be heard in the h.f. amateur bands. Not all the beacons were necessarily operational at the date the chart was compiled (January 1988). Reports of beacons heard appear every month in PW in the "Propagation" section of "On the Air".

Published lists of h.f. amateur band beacons, tend to some extent to conflict in the details they provide. This chart has been compiled from data supplied by various sources including the RSGB, the ARRL, Alan Taylor G3DME (IBP Co-ordinator), and readers of Practical Wireless. Their assistance is gratefully acknowledged.

Information on exact geographical location is sadly lacking for many amateur h.f. beacons, but within the limitations of the scale of the chart, all beacons are believed to be accurately placed. Corrections to position, callsign or frequency details, based on good information, would be welcomed for incorporation in future editions of the chart. Please address them to the Editor, Practical Wireless, Enefco House, The Quay, Poole, Dorset BH15 1PP, quoting the source of your information.

READ *PRACTICAL WIRELESS* EVERY MONTH
for the latest news and reports
on propagation on all the
Amateur Bands

diodes stop conducting and at last the output goes to logic 1. On arrival of the sixth pulse "Q₀" will go to logic 0 and pull the output down to logic 0. . . The output will remain at logic 0 until pulse 15 (remember the dividers are decades) when both "Q₀" and "Q₂" will be at logic 1 and a pulse will be produced. If several of these decades are cascaded it will be evident that when all the "Q" outputs that are connected with diodes to the common matrix line are at logic 1 a pulse will be produced, but only when all "Q" outputs are at logic 1.

Switching Circuit

The four pulses, one on each line, have to be selected at will and for this we use a quad NAND gate with open collector outputs. The "normal" level on each data line is 0 volts and the pulse goes to +5 volts for one half-cycle of the input signal. If we connect each data line to one of the inputs on each of the four gates, and pull the other input of each gate to 0 volts via a resistor, all the gates will be off and the output level at +5 volts. None of the pulses from any of the four lines will be passed to the output. If we now apply +5 volts to one of the inputs that is connected to zero volts via a resistor, this will enable the other input of that gate to pass any positive-going pulse. The gate, being an inverter, will show this pulse on its output as a negative-going pulse with a pulse length of one half-cycle of the input frequency. This will set the bistable and pass the re-

SHOPPING LIST

Resistors

0.25W 2% Metal film

220Ω	4	R5-8
4.7kΩ	5	R1-4,9
10kΩ	3	R10,12,13
10MΩ	1	R11

Capacitors

Sub-miniature ceramic disc

10nF	5	C2-6
------	---	------

Miniature polyester

0.1μF	3	C1,10
-------	---	-------

Sub-miniature ceramic plate

47pF	1	C11
------	---	-----

Foil trimmer

5-60pF	1	C9
--------	---	----

Tantalum bead

4.7μF	2	C7,8
-------	---	------

Semiconductors

Diodes

OA91	2	D25,26
1N4148	24	D1-24,27

4 digit 0.5in high red l.e.d. common cathode multiplexed display (2) (RS 587-507 or similar)

Integrated circuits

ICM7216D	1	IC5
SL560	1	IC1
74LS00	1	IC3
74LS03	1	IC4
74HC390	4	IC2,6-8
7805	1	IC9

Miscellaneous

XL1 10MHz HC18/U crystal; 28 pin d.i.l. socket (1); 14 pin d.i.l. i.c. socket (2); 16 pin d.i.l. i.c. socket (3); 1 pole 4-way rotary switch; p.c.b.; 8 way ribbon cable.

How Much? & How Difficult?

£66.50

Advanced

mainder of the signal during the current count cycle to the main counter.


At the end of the count period the MIP line goes to +5 volts and this resets all the counters on the board, resets the bistable, and updates the display. At the commencement of the next count cycle, the MIP line goes



low, the input signal is passed to the swallow counter and the cycle is repeated.

Conclusion

A very simple action really, and we hope not too difficult to grasp! The fact is that it works well and when one

Offsets coded on p.c.b. are suitable for KANGA transceiver, they are: (a) 8.9985, (b) 8.9993, (c) 9.0000, (d) 9.0015. Other offsets may be coded, see text

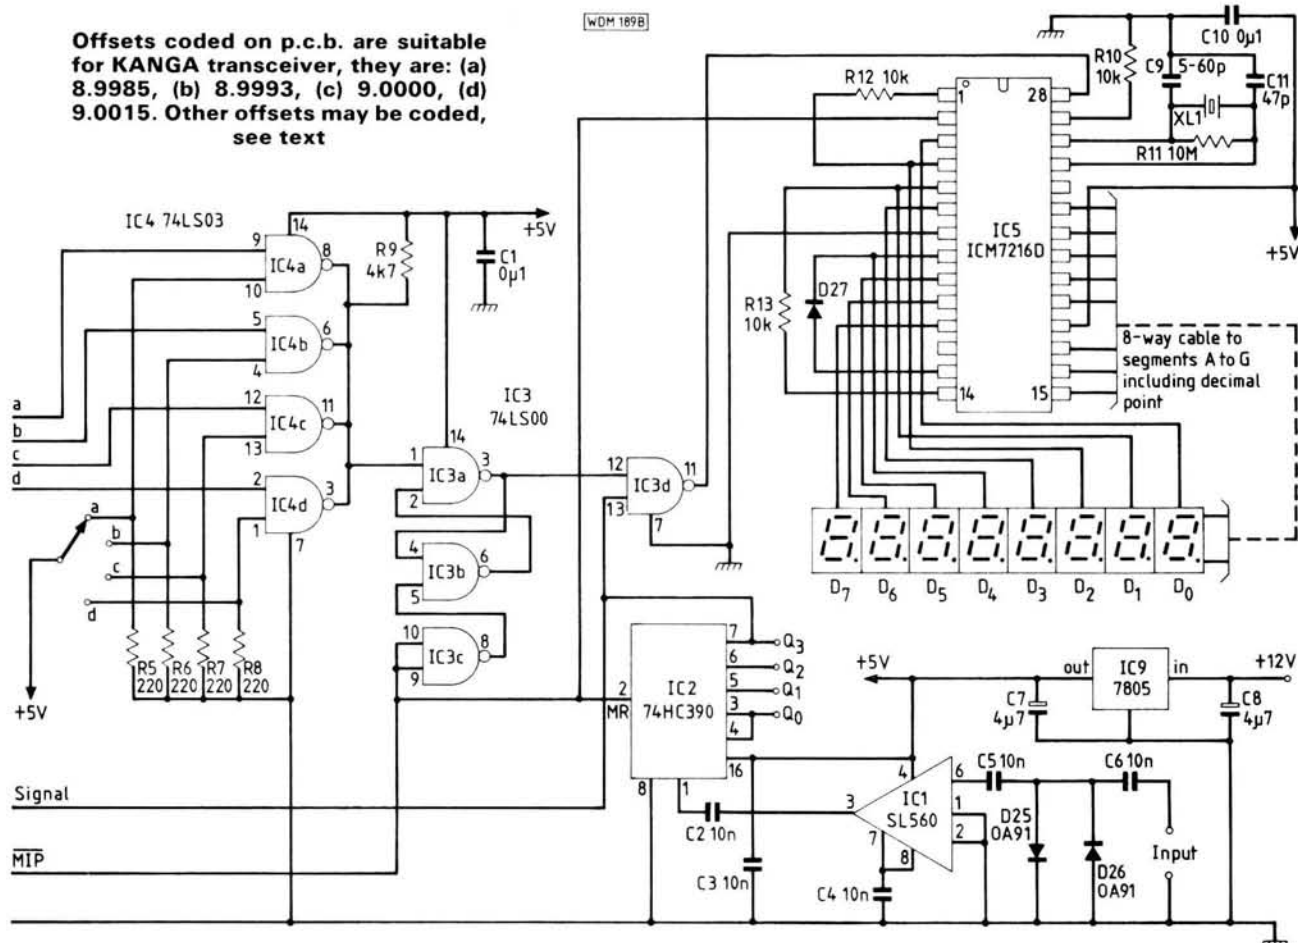

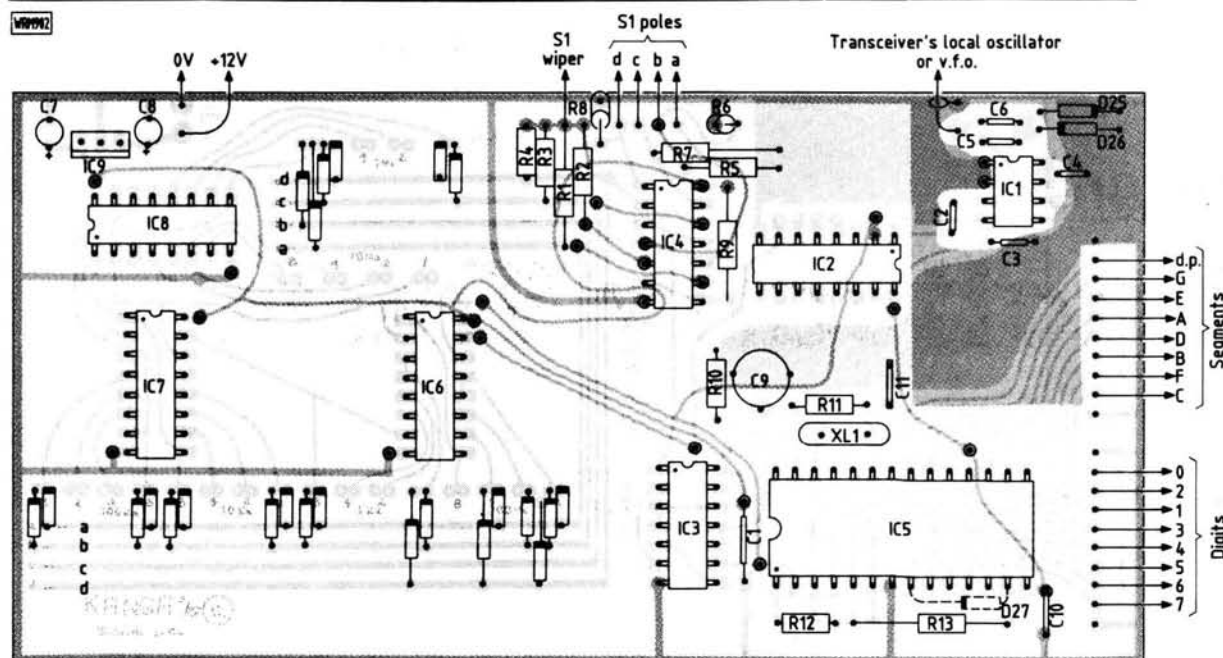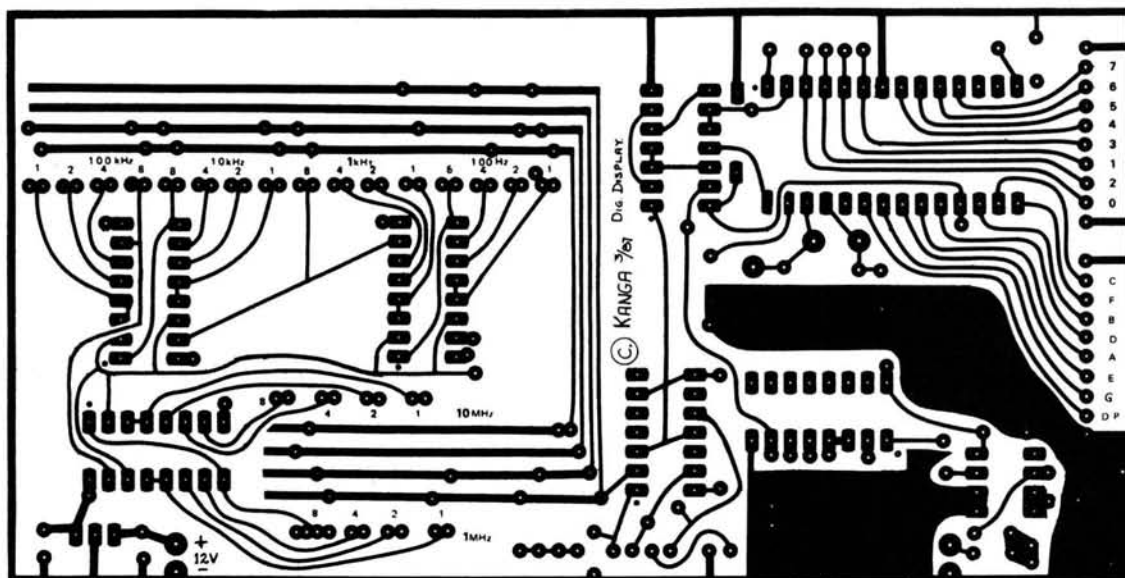

© Through board connections

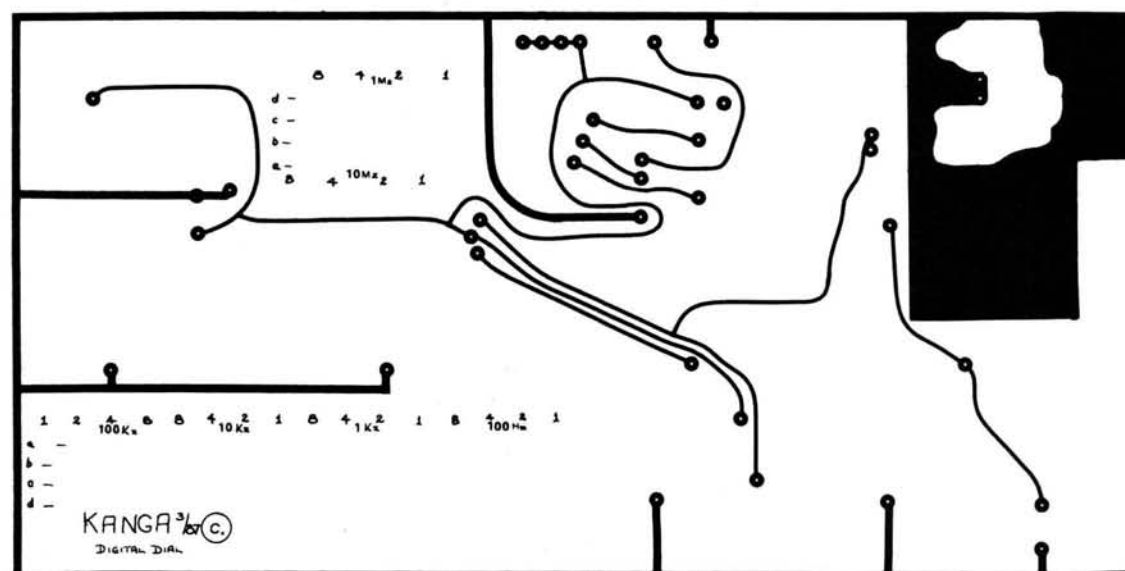


Fig. 4: Full-size double-sided track pattern and component location diagram
Note: diode D27 is connected between pins 8 and 13 of IC5 on reverse side of p.c.b., cathode to pin 8

considers the work involved in the other methods of display it can be considered fairly cost effective. **PW**

A semi kit of parts for this dial, which omits the counter chip and display but includes the p.c.b., and all the other devices and components, is available for £19.45 from: Kanga Products, 3 Limes Road, Folkestone, Kent CT19 4AU.

The counter chip and display devices have been omitted, as displays are generally available at rallies at silly prices, but may either be common cathode or common anode type. Depending on which one you obtain, you will need a different version of the counter chip. Kanga Products can supply either version of the display chip, and to this end they supply an order form with each kit. All you have to do is to select the device you require, add a cheque and post the order.

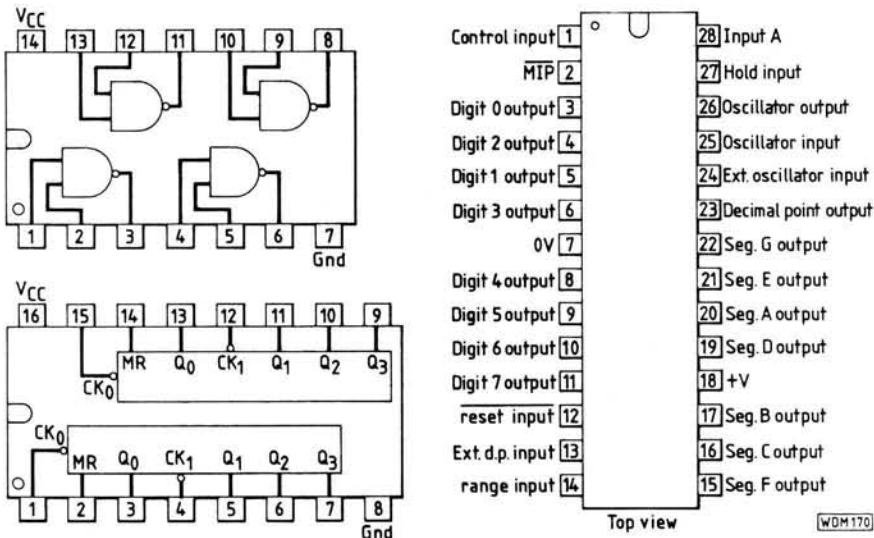


Fig. 5: IC pin-out data

Feature

Practically Yours

By Glen Ross G8MWR

Practical dBs

One of the terms one hears used regularly in our hobby is the magic decibel. It is, unfortunately, one of the least understood. It is used to describe antenna gain, losses in feeders, gain of pre-amps and many other things. If you ask many amateurs what a gain of 16dB means in terms of input and output voltages you would find a certain reluctance to provide an answer.

Reference

The first thing to grasp is the statement that something has "a gain" or "loss of 10dB" actually means nothing. This is because the decibel indicates a ratio between two different values and is therefore only meaningful if a reference of some sort is quoted with it. To give some firm examples, a beam may be quoted as having a gain of 10dB with reference to an isotropic radiator, a dipole or another antenna. If we take the isotropic as a reference with a gain of one, then the dipole with a figure of eight pattern will have a gain of about 2.5dB. The beam can then be quoted as 10dB above isotropic or 7.5dB above the reference dipole. If the beam is quoted as having a gain of 10dB reference the dipole, it can also be claimed to be 12.5dB above isotropic. There is also the possibility of quoting the dipole as being 7.5dB DOWN compared to the beam. Perhaps you can see

Practical Wireless, April 1988

now why the isotropic source (one which radiates equally badly in all directions) is the favourite of antenna manufacturers; it provides impressive gain figures.

Stage Gain

Now we come to the case of the pre-amp or linear which is quoted as having, say, 15dB of gain. This figure is always assumed to be with reference to whatever input level you are using, provided that this is within the handling capability of the equipment. Now 15dB power gain means that the output will be 30 times the input level. So, if you feed one watt into your linear you should get thirty watts out, 3 watts in gets 90 out and so on. There is obviously a limit to what you can get out and eventually you come to the point where the output does not come up to what you expect, this is known as the point where compression sets in. The level is usually quoted as the input level which results in 1dB less output than the maths would lead you to expect.

Power Output

This is usually quoted as so many watts out, but it is also possible to use our friend the dB provided you quote a reference level. A linear could be advertised as providing 100 watts or having an output level of 20dBW. The

20dB is a power gain of 100 and the "W" indicates the reference as being 1 watt. The reference could equally well be given as dBm (milliwatt), or micro or pico watt depending on the levels you are measuring and what is convenient. Putting two sets of figures together we could now advertise our linear as having an output of 20dBW (100 watts) and a gain of 13dB (times 20); meaning that it needs 5 watts drive to get the quoted output.

Table 1

Power, voltage and dB relationship. (Some figures have been slightly rounded.)

dB	power	voltage
0	1	1
1	1.3	1.15
2	1.6	1.3
3	2	1.5
4	2.5	1.65
5	3	1.8
6	4	2
7	5	2.3
8	6	2.6
9	8	2.85
10	10	3.2
11	13	3.6
12	17	4
15	30	5.6
18	63	8
20	100	10
30	1000	32
40	10000	100

Reading & Understanding

(with a bit of theory thrown in)

In Part 2 of this series, R. F. Fautley G3ASG looks at parallel circuits and a simple crystal receiver.

The Parallel Circuit (d.c.)

What does connecting components in parallel mean? It means connecting **one end** of every component together to make a single connection, and then connecting the **other ends** of all the components together to make the other connection. The circuit could look rather like a ladder, where the various components are the rungs. A circuit of five resistors connected in parallel could look like Fig. 2.1.

Electrically, these five resistors (R1 to R5) may be replaced by just **one** resistor, if we can find out how to do it! There is a "fairly simple" way to calculate the effective resistance (Rt) for the five resistors in parallel, and this is it:

$$\frac{1}{R_t} = \frac{1}{R_1} + \frac{1}{R_2} + \frac{1}{R_3} + \frac{1}{R_4} + \frac{1}{R_5}$$

It looks a bit upside-down, doesn't it? but let's have a try:

$$\begin{aligned} \frac{1}{R_t} &= \frac{1}{1000} + \frac{1}{1000} + \frac{1}{800} + \frac{1}{500} + \frac{1}{200} \\ &= 0.001 + 0.001 + 0.00125 + 0.002 \\ &\quad + 0.005 \\ &= 0.01025 \end{aligned}$$

Inverting both sides of the equation:

$$\begin{aligned} R_t &= \frac{1}{0.01025} \\ &= 97.56\Omega \end{aligned}$$

So, it is possible to replace the "ladder" of five resistors in parallel by a single resistor of 97.56Ω.

What happens if we connect a battery also in parallel with the five resistors, as in Fig. 2.2? It is obvious that **each** resistor has the 6V (6 volt) battery connected across it, so using Ohm's Law again:

The current through R1 will be $I_1 = E/R_1 = 6/1000 = 0.006A$ or 6mA

The current through R2 will be $I_2 = E/R_2 = 6/1000 = 0.006A$ or 6mA

The current through R3 will be $I_3 = E/R_3 = 6/800 = 0.0075A$ or 7.5mA

The current through R4 will be $I_4 = E/R_4 = 6/500 = 0.012A$ or 12mA

The current through R5 will be $I_5 = E/R_5 = 6/200 = 0.03A$ or 30mA

If we add the five currents together we get:

$I_1 + I_2 + I_3 + I_4 + I_5 = 6 + 6 + 7.5 + 12 + 30 = 61.5mA$

A total current of 61.5mA will be drawn from the battery. When we

worked out the effective resistance of R1 to R5 in parallel, we found it was 97.56Ω. Employing Ohm's Law again, we find that if the 6V battery were to be connected across a 97.56Ω resistor, the current drawn from the battery would be:

$$\begin{aligned} I &= \frac{6}{97.56} \\ &= 0.0615A \\ &\text{or } 61.5mA \end{aligned}$$

Surprise, surprise! The same current value we found when adding the separate current I1 to I5. So, as far as the battery is concerned, its load is 61.5mA whether resistors R1 to R5 are connected in parallel across it, or just a single 97.56Ω resistor.

The Parallel Circuit (a.c.)

If the components connected in parallel with a supply are **resistors only**, then the effective resistance of the parallel circuit may be calculated as in the previous paragraph, **whether the supply is a.c. or d.c.**

The snag comes when the components are inductors, capacitors and resistors in **any** mix of the three types —**except for all resistors**. To start with, we will look at the parallel tuned circuit as in Fig. 2.3, and we will use the same component types and values as we used in describing the series tuned circuit. Pictorially, we can represent the circuit as in Fig. 2.4. Note the difference in connections between

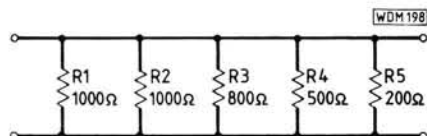


Fig. 2.1

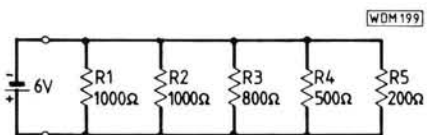


Fig. 2.2




Fig. 2.3

Figs. 1.5 and 1.6 and Figs. 2.3 and 2.4. For the parallel arrangement, there is still the similarity to the "ladder", with the components as rungs.

There is a very great difference in operation between the parallel connected inductor and capacitor and the previously described series circuit. For, if we vary the frequency **only** of the alternating supply (and again if we had a means of measuring it), the current I drawn from the supply (i.e. the signal generator) would again also vary. This time it would diminish to very nearly zero at one frequency (again call it f_0) and increase both at higher and lower frequencies.

This phenomenon is called **resonance**, but whereas formerly it was **series resonance**, this is called **parallel resonance**. Again, the frequency f_0 would not be affected by amplitude of the alternating voltage from the signal generator. The parallel resonance frequency f_0 is calculated in **exactly the same way** as for the series resonant frequency. As we have the same component values as before, f_0 is also the same, 1.59MHz.

The numerical value of the inductive reactance will again be the same as for the capacitive reactance. Also again, the inductive reactance is conventionally positive and the capacitive reactance negative. In this case, however, the two reactances are connected in **parallel** so we can't just add them together arithmetically as in the series case. The method is very similar to the one we used to determine the effective

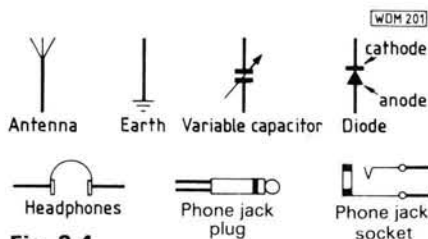


Fig. 2.4

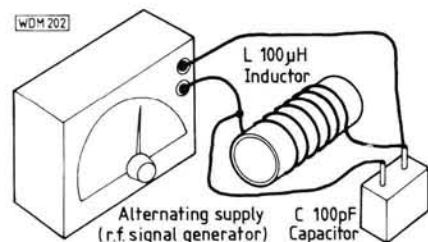


Fig. 2.5

Circuit Diagrams

value of several resistors in parallel. This time, though, we must be very careful to remember to include the + and - signs.

So, remembering that inductive reactance is given by:

$$X_L = +2\pi fL$$

and capacitive reactance by:

$$X_C = \frac{-1}{2\pi fC}$$

we can take the values of X_L and X_C from our previous series resonance example (as they are the **same** components):

$$\begin{aligned} \frac{1}{X_t} &= \frac{1}{X_L} + \frac{1}{X_C} \\ &= \frac{1}{+1000} + \frac{1}{-1000} \\ &= \frac{1}{+1000} - \frac{1}{1000} \\ &= 0\Omega \end{aligned}$$

Inverting both sides of the equation:

$$X_t = 1/0 = \infty\Omega$$

We have found that the parallel tuned circuit at resonance looks like infinity ohms, or in other words, an open circuit, explaining why at resonance the current drawn from the alternating supply (signal generator) was very nearly zero!

The Simple Crystal Receiver

Perhaps it's time to look at something a bit more interesting than components in series and parallel, something that has some practical (though limited) use. First we have some new circuit symbols to remember, so look at Fig. 2.5. Notice that the variable capacitor is similar to the ordinary capacitor symbol except for the arrow, which indicates that the component value may be varied.

Having got those into your head, refer to Fig. 2.6. Here is the circuit of the simplest of all radio receivers—the crystal set. This may seem to be a big step from the previous circuits, but it is a simple receiver which can be constructed as an exercise and also used to listen to nearby broadcast stations. The values of the components in Fig. 2.6 should enable signals in the medium wave broadcast band to be heard; but only from stations fairly close to you. No attempt will be made to give

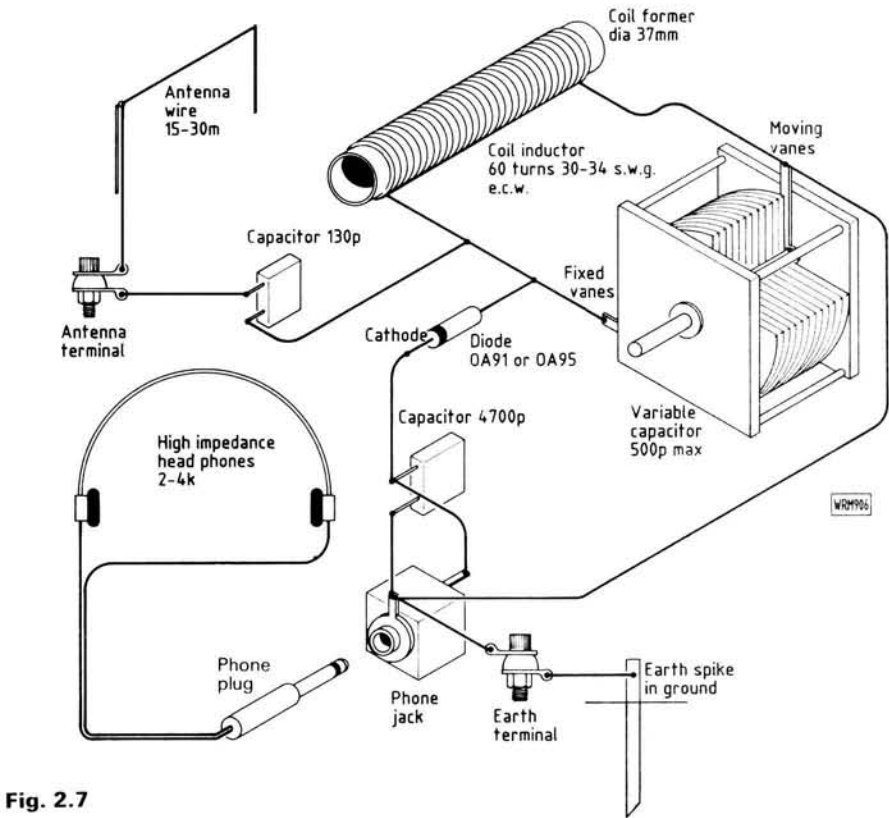


Fig. 2.7

any design information here, as the intention is primarily to assist in understanding what the circuit means in a practical sense.

Let us translate the circuit diagram of Fig. 2.6 into a more practical picture as in Fig. 2.7. The diode must be a germanium type because it is able to rectify smaller signals than silicon diodes, and the headphones must be the high impedance kind, **not** the modern 8Ω variety. The old type headphones have an impedance of 2000Ω to 4000Ω , and the reason for using them is that the diode load resistance (in this case the headphones) should be very high compared with the diode's internal resistance to provide high rectification efficiency, and thus more noise in the headphones!

An increase in sensitivity of the

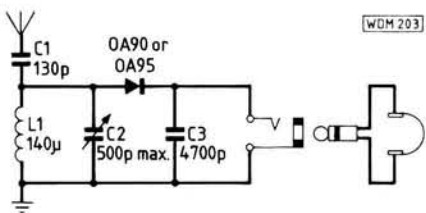


Fig. 2.6




Fig. 2.8

crystal set can be obtained by adding a 5:1 (5-to-1 turns or voltage ratio) a.f. (audio frequency) transformer between the output of the set and the headphones. The transformer should be connected with its higher impedance winding, i.e. the winding with most turns, across (in parallel with) C3, and the lower impedance winding (with only a fifth of the turns) across the phone socket, as in Fig. 2.8.

This has the effect of increasing the effective load resistance due to the headphones to around 50 to $100k\Omega$. The bit of theory, for those who want to know is:

$$\begin{aligned} R_{eff} &= t^2 \times R_{load} \\ \text{where } R_{eff} &\text{ is the effective load resistance across } C3 \\ R_{load} &\text{ is the actual load resistance (headphones)} \\ t &\text{ is the transformer turns ratio} \\ R_{eff} &= 5^2 \times 4000 \\ &= 25 \times 4000 \\ &= 100\,000\Omega \text{ or } 100k\Omega \end{aligned}$$

Any old type a.f. interstage transformer, ex-junk box, can be used for this purpose provided it has a turns ratio of around 3 to 7:1.

Even a mains transformer will provide good results if it has suitable windings, e.g. 350V-0-350V secondary and 100V (tap on main input winding) primary.

In Part 3 we'll look at transistors and transistor amplifiers.



0202 678558

Practical Wireless

0202 678558 

BOOK SERVICE

The books listed have been selected as being of special interest to our readers. They are supplied from our editorial address direct to your door. Some titles are overseas in origin.

HOW TO ORDER

Add 75p per order postage (overseas readers add £1.50 for surface mail postage) and send a postal order, cheque or international money order with your order (quoting book titles and quantities) to **PW Publishing Limited, FREEPOST, Enefc House, The Quay, Poole, Dorset BH15 1PP**. Payment by Access, Mastercard, Eurocard or Visa also accepted on telephone orders to Poole (0202) 678558. Books normally despatched by return of post but please allow 28 days for delivery.

★ A recent addition to our Book Service. O/P = Out of print, O/S = Out of stock.

RADIO

BETTER RADIO/TV RECEPTION

A. Nallawalla, A. T. Cushen and B. D. Clark

An Australian publication giving guidance and advice both to listeners seeking reliable reception of some distant radio station, and to DX listening hobbyists. 134 pages £9.95

BETTER SHORTWAVE RECEPTION (USA)

W. S. Orr W6SAI & S. D. Cowan W2LX

Receivers, antennas, propagation, DX listening techniques for the short waves and v.h.f. 158 pages £5.50

RECEIVING STATION LOGBOOK (RSGB)

Standard logbook for the s.w.l. in horizontal A4 format. 32 lines per page. 50 pages O/S

SCANNERS

Peter Rouse GU1DKD

A guide for users of scanning receivers, covering hardware, antennas, accessories, frequency allocations and operating procedure. 177 pages £7.95

SCANNERS 2

Peter Rouse GU1DKD

The companion to Scanners, this provides even more information on the use of v.h.f. and u.h.f. communications band and gives constructional details for accessories to improve the performance of scanning equipment. 216 pages £9.95

★ SHORT WAVE RADIO LISTENERS' HANDBOOK

Arthur Miller

In easy-to-read and non-technical language, the author guides the reader through the mysteries of amateur, broadcast and CB transmissions. 207 pages £6.99

★ RADIOTELETYPE CODE MANUAL

10th Edition

Joerg Klingenfuss

This book provides detailed descriptions of the characteristics of telegraph transmission on short waves, with all commercial modulation types including voice frequency telegraphy. It provides comprehensive information on all RTTY systems and c.w. alphabets. 96 pages £8.00

THE SATELLITE EXPERIMENTER'S HANDBOOK (USA)

A guide to understanding and using amateur radio, weather and TV broadcast satellites. 207 pages £9.25

BEGINNERS

AN INTRODUCTION TO RADIO DXING (BP91)

R. A. Penfold

How to find a particular station, country or type of broadcast and to receive it as clearly as possible. 112 pages £1.95

BEGINNER'S GUIDE TO RADIO (9th Edition)

Gordon J. King

Radio signals, transmitters, receivers, antennas, components, valves and semiconductors, CB and amateur radio are all dealt with here. 266 pages £6.95

BEGINNER'S GUIDE TO ELECTRONICS

Owen Bishop

For youngsters thinking of a career in electronics, theory and applications in computers, radio, TV, recording, medical and industrial electronics. 240 pages £4.95

QUESTIONS & ANSWERS RADIO

Eugene Trundle

Basics of electrical theory, radio and semiconductors, receivers, amateur and CB radio, and test equipment. 110 pages £2.95

THE SIMPLE ELECTRONIC CIRCUIT AND COMPONENTS Book 1 (BP62)

The aim of this book is to provide an inexpensive but comprehensive introduction to modern electronics. 209 pages £3.50

TELEVISION

A TV-DXERS HANDBOOK (BP176)

R. Bunney

Information on transmission standards, propagation, receivers including multi-standard, colour, satellites, antennas, photography, station identification, interference, etc. Revised and updated 1986. 87 pages O/P

SATELLITE TELEVISION

Peter S. Pearson

How satellite TV works, setting up your own TVRO terminal, the costs, the programmes available. 72 pages £4.95

★ GUIDE TO WORLD-WIDE TELEVISION TEST CARDS

Edition 2

Keith Hamer and Garry Smith

The main purpose of this book is to assist long distance television enthusiasts (TV DXers) around the world with signal identification. There are 240 test cards, identification slides and clock captions pictured. It is in "semi-alphabetical" order, that is the stations are in alphabetical order in their geographical sections. 52 pages £2.95

THEORY

AMATEUR RADIO & ELECTRONICS STUDY GUIDE

3rd Edition

Ian Ridpath ZL1BCG

This book aims to fill the gap between high level amateur radio handbooks and over-simplified beginners manuals. It is written in a "students own notes" format that hopes to put the reader more at ease than formally written text books do. 216 pages £7.00

COMMUNICATION (BP89)

(Elements of Electronics—Book 5)

F. A. Wilson

Fundamentals of line, microwave, submarine, satellite, digital multiplex, radio and telegraphy systems are covered, without the more complicated theory or mathematics. 256 pages £2.95

FOUNDATIONS OF WIRELESS AND ELECTRONICS (10th Edition)

M. G. Scroggie and S. W. Amos

Covering d.c. and a.c. circuits, L, C, tuned circuits and selectivity, valves, semiconductors, transmission lines, antennas, radiation, oscillation, modulation, detection, amplification, superhet receivers, c.r.t.s, waveform generators and switches, computers and power supplies. 551 pages £8.95

LEVEL II RADIO & ELECTRONICS THEORY

Ian Ridpath ZL1BCG

A sequel to Amateur Radio & Electronics Study Course, this book covers advanced theory up to a level needed on most technician courses. The handwritten format is designed to make the student feel as though the pages are his own notes. 169 pages £6.70

PRACTICAL ELECTRONICS CALCULATIONS AND FORMULAE (BP53)

F. A. Wilson

This has been written as a workshop manual for the electronics enthusiast. There is a strong practical bias and higher mathematics have been avoided where possible. 249 pages £3.95

LISTENING GUIDES

AIR BAND RADIO HANDBOOK

David J. Smith

With air band radio you can eavesdrop on the conversations between aircraft and those on the ground who control them. The author, an air traffic controller, explains more about this listening hobby. 174 pages £5.99

GUIDE TO BROADCASTING STATIONS

19th Edition (1987/88)

Philip Darrington

Frequency and station data, receivers, antennas, Latin American DXing, reporting, computers in radio, etc. 240 pages £6.95

★ GUIDE TO FACSIMILE STATIONS

7th Edition

Joerg Klingenfuss

This manual is the basic reference book for everyone interested in FAX. Frequency, call sign, name of the station, ITU country/geographical symbol, technical parameters of the emission are all listed. All frequencies have been measured to the nearest 100Hz. 252 pages £12.00

★ GUIDE TO FORMER UTILITY TRANSMISSIONS

3rd Edition

Joerg Klingenfuss

This manual is built on continuous monitoring of the radio spectrum from the sixties until the recent past. It is a useful summary of former activities of utility stations and provides information to the active radio monitor in the classification and identification of radio signals. 126 pages £8.00

★ GUIDE TO UTILITY STATIONS

6th Edition

Joerg Klingenfuss

This book covers the complete short wave range from 3 to 30MHz plus the adjacent frequency bands from 0 to 150kHz and from 1.6 to 3MHz. It includes details on all types of utility stations including FAX and RTTY. There are 15802 entries in the frequency list and 3123 in the alphabetical call sign list plus press services and meteorological stations. 494 pages £19.00

★ HF OCEANIC AIRBAND COMMUNICATIONS (2nd Edn.)

Bill Laver

Aircraft channels by frequency and band, main ground radio stations, European R/T networks, North Atlantic control frequencies. 24 pages £3.50

INTERNATIONAL RADIO STATIONS GUIDE (BP155)

Revised and updated in 1985, this book shows the site, country, frequency/wavelength and power of stations in Europe, the Near East and N. Africa, North and Latin America and the Caribbean, plus short-wave stations worldwide. 128 pages O/P

THE COMPLETE VHF/UHF FREQUENCY GUIDE

Updated 1988

This book gives details of frequencies from 26–2250MHz with no gaps and who uses what. Recently updated, there are chapters on equipment requirements as well as antennas, etc. 88 pages £5.95

★ THE INTERNATIONAL VHF FM GUIDE

7th Edition

Julian Baldwin G3UHK & Kris Partridge G8AUU

The latest edition of this useful book gives concise details of repeaters and beacons worldwide plus coverage maps and further information on UK repeaters. 70 pages £2.85

UK LISTENERS CONFIDENTIAL FREQUENCY LIST (4th Edn. 1987/88)

Bill Laver

Covering the services and transmission modes that can be heard on the bands between 1.635 and 29.7MHz. 124 pages £5.95

VHF/UHF AIRBAND FREQUENCY GUIDE

A complete guide to the airband frequencies including how to receive the signals, the frequencies and services, VOLMET and much more about the interesting subject of airband radio. 74 pages £5.95

★ WORLD RADIO TV HANDBOOK 1988

Country-by-country listings of long, medium and short wave broadcasters and TV stations. Receiver test reports. English language broadcasts. The s.w.l.'s "bible". 576 pages £17.95

INTERFERENCE

INTERFERENCE HANDBOOK (USA)

William R. Nelson WA6FGG

How to locate and cure r.f.i. for radio amateurs, CBers and TV and stereo owners. 253 pages £6.75

RADIO FREQUENCY INTERFERENCE (USA)

What causes r.f.i.? Are all r.f.i. problems difficult, expensive and time-consuming to cure? These questions and many more are answered in this book. 84 pages £4.30

TELEVISION INTERFERENCE MANUAL (RSGB)

B. Priestley

TV channels and systems, spurious radiation TVI, strong-signal TVI, audio breakthrough, transmitter design. 78 pages £2.94

AMATEUR RADIO

A GUIDE TO AMATEUR RADIO (RSGB)

Amateur Radio—the hobby, the equipment, workshop practice, the licence, the RAE (including sample questions). 154 pages £3.62

AMATEUR RADIO CALL BOOK (RSGB)

Winter 87/88 Edition

This useful work now incorporates a 48-page reference section of useful information for amateur radio enthusiasts. 310 pages £6.47

AMATEUR RADIO LOGBOOK

Standard logbook for the transmitting amateur in horizontal A4 format. 25 lines per page. 96 pages £2.30

AMATEUR RADIO OPERATING MANUAL (RSGB)

A mine of information on just about every aspect of amateur operating, including international call sign series holders, prefix lists, DXCC countries list, etc. 204 pages £6.16

AMATEUR RADIO SATELLITES the first 25 years

The material in this souvenir publication is drawn from the author's archives. It is mainly a pictorial account on the pattern of developments which have occurred over the last 25 years. 34 pages £2.25

CARE AND FEEDING OF POWER GRID TUBES (USA)

This handbook analyses the operation of EIMAC power grid valves and provides design and application information to assist the user of these valves. 156 pages £6.75

HOW TO PASS THE RADIO AMATEURS' EXAMINATION (RSGB)

G. L. Benbow G3HB

The background to multiple choice exams and how to study for them with nine sample RAE papers for practice, plus maths revision. 91 pages £3.15

PASSPORT TO AMATEUR RADIO

Reprinted from PW 1981-1982

The famous series by GW3JGA, used by thousands of successful RAE candidates as an aid to their studies. Plus other useful articles for students of amateur radio. 96 pages £1.50

QUESTIONS & ANSWERS

AMATEUR RADIO

F. C. Judd G2BCX

What is amateur radio? The Radio Amateurs' Exam and Licence. The technology, equipment, antennas, operating procedure and codes used by amateurs. 122 pages £2.95

RADIO AMATEUR'S GUIDE

RADIO WAVE PROPAGATION

(HF Bands)

F. C. Judd G2BCX

The how and why of the mechanism and variations of propagation in the h.f. bands. 144 pages £8.95

RADIO AMATEUR'S MAP OF

NORTH AMERICA (USA)

Shows radio amateurs prefix boundaries, continental boundaries and zone boundaries. 760 x 636mm O/S

★ THE 1988 ARRL HANDBOOK FOR THE RADIO AMATEUR

This, the sixty-fifth edition is available only in hardback, the first time the ARRL have done this. New construction projects are the theme of this edition, there is a deluxe memory keyer, receiver projects, a linear QSK converter, a low-powered balanced Transmatch and a d.t.m.f. decoder. Updated every year, this provides useful reference material for the radio amateur. It also includes 18 pages of p.c.b. track pattern for you to build your own boards. 1157 pages £19.25 (hardback)

VHF HANDBOOK

FOR RADIO AMATEURS (USA)

H. S. Brier W9EGQ & W. I. Orr W6SAI

VHF/UHF propagation, including moonbounce and satellites, equipment and antennas. 335 pages £7.95

VHF/UHF MANUAL (RSGB)

G. R. Jessop G6JP

Theory and practice of amateur radio reception and transmission, between 30MHz and 24GHz. 520 pages £12.92

DATA & REFERENCE

DIGITAL IC EQUIVALENTS

AND PIN CONNECTIONS (BP140)

A. Michaels

Equivalents and pin connections of a popular selection of European, American and Japanese digital i.c.s. 256 pages £5.95

INTERNATIONAL DIODE

EQUIVALENTS GUIDE (BP108)

A. Michaels

Possible substitutes for a large selection of many different types of semiconductor diodes. 144 pages £2.25

INTERNATIONAL TRANSISTOR

EQUIVALENTS GUIDE (BP85)

A. Michaels

Possible substitutes for a popular selection of European, American and Japanese transistors. 320 pages £3.50

LINEAR IC EQUIVALENTS

AND PIN CONNECTIONS (BP141)

A. Michaels

Equivalents and pin connections of a popular selection of European, American and Japanese linear i.c.s. 320 pages £5.95

NEWNES COMPUTER ENGINEER'S

POCKET BOOK

This is an invaluable compendium of facts, figures, circuits and data and is indispensable to the designer, student, service engineer and all those interested in computer and microprocessor systems. 203 pages Hardback £8.95

NEWNES ELECTRONICS POCKET BOOK

5th Edition

Presenting all aspects of electronics in a readable and largely non-mathematical form for both the enthusiast and the professional engineer. 315 pages Hardback £8.95

★ NEWNES RADIO AMATEUR AND

LISTER'S POCKET BOOK

Steve Money G3FZX

This book is a collection of useful and intriguing data for the traditional and modern radio amateur as well as the short wave listener. Topics such as AMTOR, packet radio, SSTV, computer communications, airband and maritime communications are all covered. 160 pages £8.95

NEWNES RADIO AND ELECTRONICS

ENGINEER'S POCKET BOOK

(17th Edition)

Keith Brindley

Useful data covering maths, abbreviations, codes, symbols, frequency bands/allocation, UK broadcasting stations, semiconductor components, etc. 201 pages Hardback £6.95

NEWNES TELEVISION AND VIDEO

ENGINEER'S POCKET BOOK

Eugene Trundle

This is a valuable reference source for practitioners in "entertainment" electronic equipment. It covers TV reception from v.h.f. to s.h.f., display tubes, colour camera technology, video recorder and video disc equipment, video text and hi-fi sound. 323 pages £9.95

POWER SELECTOR GUIDE (BP235)

J. C. J. Van de Ven

This guide has the information on all kinds of power devices in useful categories (other than the usual alpha numeric sort) such as voltage and power properties making selection of replacements easier. 160 pages £4.95

RSGB RADIO DATA

REFERENCE BOOK

G. R. Jessop G6JP

The 5th Edition of an essential book for the radio amateur's or experimenter's workbench. 244 pages Hardback O/S

SEMICONDUCTOR DATA BOOK

A. M. Ball

Characteristics of about 10 000 transistors, f.e.t.s, u.j.t.s, diodes, rectifiers, triacs and s.c.r.s. 175 pages £7.50

TRANSISTOR SELECTOR GUIDE (BP234)

J. C. J. Van de Ven

This guide has the information on all kinds of transistors in useful categories (other than the usual alpha numeric sort) such as voltage and power properties making selection of replacements easier. 192 pages £4.95

FAULT-FINDING

ARE THE VOLTAGES CORRECT?

Reprinted from PW 1982-1983

How to use a multimeter to fault-find on electronic and radio equipment, from simple resistive dividers through circuits using diodes, transistors, i.c.s and valves. 44 pages £1.50

OSCILLOSCOPES, HOW TO USE THEM, HOW

THEY WORK (Revised 2nd Edition)

Ian Hickman

This book describes oscilloscopes ranging from basic to advanced models and the accessories to go with them. 133 pages £5.95

PRACTICAL HANDBOOK OF

VALVE RADIO REPAIR

Chas E Miller

The definitive work on repairing and restoring valved broadcast receivers dating from the 1930s to the 60s. Appendices giving intermediate frequencies, valve characteristic data and base connections. 230 pages Hardback £15.95

QUESTIONS & ANSWERS

RADIO REPAIR

Les Lawry-Johns

How to fault-find and repair valved and transistorised receivers, car radios and unit audio equipment. Suggested lists of tools and spare parts. 106 pages £2.95

SERVICING RADIO,

HI-FI AND TV EQUIPMENT

Gordon J King

A very practical book looking at semiconductor characteristics, d.c. and signal tests, fault-finding techniques for audio, video, r.f. and oscillator stages and their application to transistor radios and hi-fi. 205 pages £8.95

TEST EQUIPMENT FOR

THE RADIO AMATEUR (RSGB)

H. L. Gibson G2BUP

Techniques and equipment for tests and measurements on devices, systems and antennas. 142 pages Hardback £7.88

TRANSISTOR RADIO FAULT FINDING CHART

(BP70)

C. E. Miller

Used properly, should enable most common faults to be traced reasonably quickly. Selecting the appropriate fault description at the head of the chart, the reader is led through a sequence of suggested checks until the fault is cleared. 635 x 455mm (approx) £0.95

PROJECT CONSTRUCTION

HOW TO BUILD ADVANCED SHORT WAVE RECEIVERS (BP226)

R. A. Penfold

Greater satisfaction can be gained from the hobby of shortwave listening when using home constructed equipment. This book gives full practical constructional details of a number of receivers as well as some add-on circuits like S-meters and noise limiters. 118 pages £2.95

HOW TO DESIGN AND MAKE

YOUR OWN P.C.B.s (BP121)

R. A. Penfold

Designing or copying printed circuit board designs from magazines, including photographic methods. 80 pages £1.95

INTRODUCING QRP

Collected Articles from PW 1983-1985

An introduction to low-power transmission, including constructional details of designs by Rev. George Dobbs G3RJV for transmitters and transceivers from Top Band to 14MHz, and test equipment by Tony Smith G4FAI. 64 pages £1.50

MORE ADVANCED POWER SUPPLY PROJECTS

(BP192)

R. A. Penfold

The practical and theoretical aspects of the circuits are covered in some detail. Topics include switched mode power supplies, precision regulators, dual tracking regulators and computer controlled power supplies, etc. 92 pages £2.95

POWER SUPPLY PROJECTS BP76

R. A. Penfold

This book gives a number of power supply designs including simple unregulated types, fixed voltage regulated types and variable voltage stabilised designs. 91 pages £2.50

PRACTICAL POWER SUPPLIES

Collected Articles from PW 1978-1985

Characteristics of batteries, transformers, rectifiers, fuses and heatsinks, plus designs for a variety of mains-driven power supplies, including the FV "Marchwood" giving a fully stabilised and protected 12V 30A d.c. 48 pages £1.25

PROJECTS IN AMATEUR RADIO AND SHORT

WAVE LISTENING

F. G. Rayer G3OGR

Full constructional details are given for all projects, including housing the units in a suitable case. All the projects are either on p.c.b. or matrix board. 90 pages £4.95

SOLID STATE SHORT WAVE RECEIVERS FOR

BEGINNERS (BP222)

R. A. Penfold

There is a strange fascination in listening to a broadcast which has been transmitted over many thousands of kilometres. This is even more the case when you've built the receiver yourself. This book contains several designs that will give a fairly high level of performance. 93 pages £2.95

AUDIO FREQUENCIES

AUDIO (BP111)

(Elements of Electronics—Book 6)

F. A. Wilson

This book studies sound and hearing, and the operation of microphones, loudspeakers, amplifiers, oscillators, and both disc and magnetic recording. 320 pages £3.50

ANTENNAS (AERIALS)

AERIAL PROJECTS (BP105)

R. A. Penfold

Practical designs including active, loop and ferrite aerials plus accessory units. 96 pages £1.95

ALL ABOUT CUBICAL QUAD

ANTENNAS (USA)

W. I. Orr W6SAI & S. D. Cowan W2LX

Theory, design, construction, adjustment and operation of quads. Quads vs. Yagis. Gain figures. 109 pages £5.50

ALL ABOUT VERTICAL ANTENNAS (USA)

W. I. Orr W6SAI & S. D. Cowan W2LX

Theory, design, construction, operation, the secrets of making vertical work. 191 pages £7.50

AN INTRODUCTION TO ANTENNA THEORY

(BP198)

H. C. Wright

This book deals with the basic concepts relevant to receiving and transmitting antennas. Lots of diagrams reduce the amount of mathematics involved. 86 pages £2.95

BEAM ANTENNA HANDBOOK (USA)

W. I. Orr W6SAI & S. D. Cowan W2LX

Design, construction, adjustment and installation of h.f. beam antennas. 198 pages £6.75

HF ANTENNAS

FOR ALL LOCATIONS (RSGB)

L. A. Moxon G6XN

Taking a new look at how h.f. antennas work, and putting theory into practice. 260 pages £6.17

OUT OF THIN AIR

Collected Antenna Articles from PW 1977-1980

Including such favourites as the ZL Special and "2BCX 16-element beams for 2m, and the famous "Slim Jim", designed by Fred Judd G2BCX. Also features systems for Top Band, medium wave/long wave loop designs and a v.h.f. direction finding loop. Plus items on propagation, accessories and antenna design. 80 pages £1.80

SIMPLE, LOW-COST WIRE ANTENNAS FOR

RADIO AMATEURS (USA)

W. I. Orr W6SAI & S. D. Cowan W2LX

Efficient antennas for Top Band to 2m, including "invisible" antennas for difficult station locations. 191 pages £6.75

THE ARRL ANTENNA BOOK

14th Edition (USA)

A station is only as effective as its antenna system. This book covers propagation, practical constructional details of almost every type of antenna, test equipment and formulas and programs for beam heading calculations. 327 pages £9.10

THE ARRL ANTENNA COMPENDIUM Volume 1

(USA)

This book makes fascinating reading of hitherto unpublished material. Among topics discussed are quads and loops, log periodic arrays, beam and multi-band antennas, verticals and reduced size antennas. 175 pages £9.25

THE RADIO AMATEUR ANTENNA HANDBOOK (USA)

W. I. Orr W6SAI and S. D. Cowan W2LX

Yagi, quad, quagi, l-p, vertical, horizontal and "sloper" antennas. Towers, grounds and rotators. 187 pages £6.75

TWO-METRE ANTENNA HANDBOOK

F. C. Judd wrote this book for radio amateurs new to the 144-146MHz band. The range of antennas described will cater for most situations, particularly those where space is a problem. 157 pages £5.95

WIRES & WAVES

Collected Antenna Articles from PW 1980-1984

Antenna and propagation theory, including NBS Yagi design data. Practical designs for antennas from medium waves to microwaves, plus accessories such as a.t.u.s, s.w.r. and power meters, and a noise bridge. Dealing with TVI. 160 pages £3.00

25 SIMPLE AMATEUR BAND AERIALS (BP125)

E. M. Noll

How to build 25 simple and inexpensive aerials, from a simple dipole through beam and triangle designs to a mini-rhombic. Dimensions for specific spot frequencies, including the WARC bands. 80 pages £1.95

25 SIMPLE INDOOR AND WINDOW AERIALS (BP136)

E. M. Noll

Designs for people who live in flats or have no gardens, etc., giving surprisingly good results considering their limited dimensions. 64 pages £1.75

25 SIMPLE SHORT WAVE BROADCAST BAND AERIALS (BP132)

E. M. Noll

Designs for 25 different aerials, from a simple dipole through helical designs to a multi-band umbrella. 80 pages £1.95

25 SIMPLE TROPICAL AND MW BAND AERIALS (BP145)

E. M. Noll

Simple and inexpensive aerials for the broadcast bands from medium wave to 49m. 64 pages £1.75

COMPUTING

AMATEUR RADIO SOFTWARE (RSGB)

John Morris GM4ANB

Using a computer for c.w., RTTY, data, plus calculations for antennas, distance, bearing, locators, satellites, sun, moon and circuit design. 328 pages Hardback £9.41

AN INTRODUCTION TO COMPUTER COMMUNICATIONS (BP177)

R. A. Penfold

Details of various types of modem and their applications, plus how to interconnect computers, modems, and the telephone system. Also networking systems and RTTY. 96 pages £2.95

AN INTRODUCTION TO COMPUTER PERIPHERALS (BP170)

J. W. Penfold

Covers monitors, printers, disk drives, cassette recorders, modems, etc., explaining what they are, how to use them and the various types of standards. 80 pages £2.50

MICROPROCESSING SYSTEMS AND CIRCUITS (BP77)

(Elements of Electronics—Book 4)

F. A. Wilson

A comprehensive guide to the elements of microprocessing systems, which are becoming ever more involved in radio systems and equipment. 256 pages £2.95

MORSE

INTRODUCING MORSE

Collected Articles from PW 1982-1985

Ways of learning the Morse Code, followed by constructional details of a variety of keys including Iambic, Triambic, and an Electronic Bug with a 528-bit memory. 48 pages £1.25

★ THE MORSE CODE FOR RADIO AMATEURS (RSGB)

Margaret Mills G3ACC

A guide to learning to send and receive Morse code signals up to the 12 w.p.m. required for the RAE. 79 pages £2.88

THE SECRET OF LEARNING MORSE CODE

Mark Francis

Designed to make you proficient in Morse code in the shortest possible time, this book points out many of the pitfalls that beset the student. 87 pages £4.95

REVISED SERVICE! LOWER PRICES!

Practical Wireless



0202 678558



PCB SERVICE

Printed circuit boards for *Practical Wireless* constructional projects are available from the PW PCB SERVICE. The boards are made in 1.5mm glass-fibre, and are fully drilled and tinned. All prices include postage, packing and VAT for UK orders. Please add £2.00 per order for despatch to overseas addresses.

Orders and remittances should be sent to: **PW Publishing Limited, FREEPOST, Enefco House, The Quay, Poole, Dorset BH15 1PP**, marking your envelope **PCB SERVICE**. Cheques should be crossed and made payable to PW Publishing Ltd.

When ordering, please state the Article Title and Issue Date as well as the Board Number. Please print your name and address clearly in block letters, and do not send any other correspondence with your order. You may telephone your order using Access or Visa. A telephone answering machine will accept your order outside office hours.

Please allow 28 days for delivery. Always check the latest issue of PW for the current details of price and availability. Please enquire for p.c.b.s not listed here.

Board Number	Title of Article	Issue Dated	Price (£)
WR068	AF Speech Processor	Jan 80	5.20
WR095	Transceiver Power Supply	Sep 80	3.85
WR126	"Exe" 10GHz Transceiver	Aug 81	7.70
WR144	Iambic Keyer	Mar 82	6.50
WR143	ATV Converter	Apr 82	7.10
WR156	Repeater Time-out Alarm	Nov 82	5.20
WR160	LMS Regenerative Receiver	Feb 83	5.20
WR167	RTTY Terminal Unit for ZX81	June 83	7.80
WR165	"Severn" (VFO)	June 83	5.20
WR166	"Severn" (Receiver/Audio)	June 83	6.50
WR168	"Severn" (Ch. over/Sidetone)	Jul 83	6.50
WR169	"Severn" (Transmitter)	Jul 83	6.50
WR165 etc set	"Severn"	—	14.90
WR161	"Marchwood"	Jul 83	2.40
WR179	Transceiver VOX Unit	Mar 84	6.50
WR183	Top-band DF Receiver	Apr 84	6.50
WR184	Simple Top-band Receiver	Jun 84	6.50
WR185	Auto-notch Filter	Jun 84	6.50
WR187	Morse Sending Trainer	Jul 84	4.50
WR190	Mod FRG-7 (Switching)	Oct 84	4.50
WR189/192 pr	Bug Key with 528-bit memory	Oct 84	8.50
WR194	Mod FRG-7 (FM/squelch)	Nov 84	4.50
WR195	Stable Toneburst	Nov 84	2.60
WR196	"Teme" (Transmitter)	Nov 84	3.70
WAD246	"Dart" Follow-up	Dec 84	4.00
WA001	"Teme" (VFO/Doubler)	Dec 84	2.80
WA002	"Teme" (Receiver)	Jan 85	4.30

Board Number	Title of Article	Issue Dated	Price (£)
WAD280**	Triambic Keyer	Feb 85	7.10
WAD249	Mod FRG-7 (BFO)	Feb 85	3.00
A004	"Colne" (RF Amp)	Apr 85	3.10
A005	"Colne" (VFO)	Apr 85	3.10
WR198	"Colne" (Product Det/Audio)	May 85	3.90
WR197	"Colne" (Oscill/Converter)	Jun 85	3.90
WAD302	Battery Charger Controller	Jun 85	3.00
WR200	Low-cost Crystal Tester	Jul 85	2.50
WR201	Add-on BFO	Aug 85	2.50
WR202	Economy UHF Pre-scaler	Sep 85	3.70
WR199	"Meon" 50MHz Transverter	Oct 85	6.70
WR203	Simple Capacitance Meter	Oct 85	2.80
WR204	WQ Medium Wave Loop	Nov 85	3.00
WR205	RTTY/Morse Modem	Jan 86	5.40
WR206	RTTY/Morse Modem (plug-in)	Jan 86	2.80
WR207	Crystal Calibrator	Jan 86	2.10
WR208	RF Speech Processor	Mar 86	4.10
WR209	Simple Audio Oscillator	Mar 86	4.30
WR211	"Meon" Filter	Apr 86	3.10
WR210	"Arun" Parametric Filter	May 86	8.10
WR213	Mod FRG-7 (Carrier Osc)	Jun 86	2.70
WR215	Simple 50MHz Converter	Sep 86	3.60
WR217	Automatic NiCad Charger	Oct 86	2.40
WR220	Get Started Low-cost Converter	Oct 86	2.40
WR216	LF Bands Active Antenna	Nov 86	2.40
WR222	"Taw" VLF Converter	Nov 86	2.80
WR223	High-imp MOSFET Voltmeter	Dec 86	2.90
WR214	Mod SRX-30D (Audio)	Dec 86	3.00
WR224	"Westbury" Basic Wobulator	Jan 87	3.50
WR218	Masthead Pre-amp for 144MHz	Feb 87	4.20
WR219	Masthead Pre-amp PSU	Feb 87	2.50
WR225	"Woodstock" SW Converter	Mar 87	4.10
WR298	"Itchen" LCR Bridge	Apr 87	3.40
WR226-8 set	"Blandford" Rcvr Converter	Apr 87	9.70
WR230-2 set	"Axe" Signal Tracer	May 87	9.20
WR233	"Downton" F-V Converter	Jun 87	3.90
WR234	Side-tone Oscillator	Jun 87	2.70
WR235	Mains on/off for Batt Radios	Sep 87	3.00
WR236	"Blenheim" VHF Converter	Sep 87	4.50
KANGA	High Stability VFO (see issue)	Oct 87	—
WR237	RTTY Tuning Indicator	Nov 87	5.20
WR238	"Otter" 50MHz Receiver	Jan 88	7.10
WR239-241 set	"Orwell" Medium Wave Rcvr	Mar 88	9.10
WR242	"Orwell" Varicap Tune Option	Mar 88	2.90
WR243	VHF Monitor Receiver (Audio)	Apr 88	2.30
WR244*	Mobile Practice Morse Key	Apr 88	1.50

Lee Electronics



NORMAN
G4THJ

NEW HANSON SWR METERS

		P+P
SWR3	3.5-30MHz 200 Watts/50-150MHz 50 watts	34.00 (1.50)
SWR50	3.5-150MHz 1KW PEP with back light facility	34.00 (1.50)
FS500H	This peak reading meter has RMS/PEP with follow/hold facility in the range 1.8 to 60MHz/20/200/2KW	75.00 (2.00)
SWR15	Single meter SWR/Field Strength 3.5-150MHz	9.77 (1.50)
SWR25	Twin meter SWR/Power/Field Strength 3.5-150MHz	19.00 (1.50)
UH74	SWR Power meter switchable HF/2M/432MHz (10W) with remote head	24.95 (1.50)
T435	VHF/UHF Twin Meter 2/20/120W	52.50 (1.50)

WELZ PRODUCTS

SP330	1.8-500MHz 200W Dash Mount	95.00 (1.50)
SP430	Mobile SWR/PWR/Vol Meter 140-150/420-450 MHz 60 watts	49.50 (2.00)
SP600	1.6-500MHz 20/200/2kW	169.00 (1.50)
SP825	1.8-1.3GHz 2/15/150W	169.00 (1.50)
SP10X	1.8-500MHz 200W Pocket Size	42.50 (1.00)
AC38	3.5-30MHz Coax ATU 200CW/400C PEP	95.00 (1.00)

MORSE KEYS

HK707	Straight Up/Down Keyer	19.25 (1.00)
HK702	As HK707 only with a Heavy Marble Base	34.75 (1.50)
HK704	Squeeze Keyer	24.50 (1.50)
MK705	Squeeze Keyer	31.50 (1.00)
MK702	Manipulator Key on Marble Base	40.50 (1.00)
BK100	Semi Automatic Bug Key	32.95 (1.00)
EKM-1A	Morse Code Practice Oscillator with variable Tone	10.25 (1.00)

ROTATORS

AR1002	Automatic Antenna Rotator	45.00 (3.25)
AR2200	Heavy Duty Antenna Rotator	89.95 (3.50)
KR400C	Mid to heavy Vertical Load 200KG 6 core cable	169.00 (5.00)
KR600C	Heavy-vertical load 200KG Brake Torque 400KG/CM	219.00 (5.00)

ANTENNAS

TA285D	2M Colinear Base Antenna/70cm Colinear	35.00 (7.50)
X50	Base Antenna 70/2	60.00 (7.50)
DPCP5	Base Antenna 80-10m	198.00 (7.50)
DPL EL770H	Mobile Antenna 70/2	29.95 (7.50)

POWER SUPPLIES

EPL40	4.2 Amps	39.95 (4.00)
EPL70	6.5 Amps	69.00 (4.00)
EPL122	12 Amps	95.00 (5.00)
EP2510	25A Continuous 30A Max 13.8VDC Fully Stabilized	155.00 (6.50)
DRAE	13.8VDC 12 Amps	86.50 (5.00)
DRAE	13.8VDC 6 Amps	65.00 (4.00)

ADONIS MICS

AM303	Base Mic SSB/FM Switch	49.50
AM503	Desk Compressor Mic as 803 with One Output. Two levels of compression	59.00 (1.15)
AM803	As 503 with Meter & 3 Outputs	89.50
FX1	Swan Neck Fet Mic with Control Box	49.00 (1.15)
202S	Flexible Neck Clip Mic with Control Box	37.50 (1.15)
HW7	Head Set Boom Mic For Yaesu/Icom/Trio	27.50 (1.15)

COAX SWITCHES

SA450	Diecast 2 Way SO239 3.5-500MHz	12.65 (1.00)
Toggle Type	CT1 3x SO329/CT2 2x SP239 1x PL259 3.5-150MHz	7.50 (1.00)

★ SPECIAL OFFERS ★

TA285D	2m Colinear Base Antenna/70cm Colinear	29.95 (3.00)
Toggle Switch		6.00 (75p)
SWR15		7.50 (2.00)
LPF120	Low Pass Filter (up to 55MHz)	3.75 (1.50)

WE ALSO STOCK ICOM – YAESU – MET – JAYBEAM PRODUCTS AND ALL POPULAR CONNECTORS AND TERMINATION SOCKETS AT COMPETITIVE PRICES.

SR STANDARD

C500

£375

WE ARE PROUD TO ANNOUNCE THE NEW, TOP OF THE RANGE, STANDARD C500 HANDHELD 2m AND 70cms, FULL DUPLEX – DUAL BAND TRANSCEIVER AT THE UK RECOMMENDED RETAIL PRICE OF £375.00 (INC. VAT)

THIS IS, OF COURSE, THE EUROPEAN VERSION WITH FACTORY FITTED TONEBURST – PLUS MANY OTHER INCREDIBLE FEATURES NOT PREVIOUSLY AVAILABLE IN A HANDHELD.



★ Frequency coverage 144-146 & 430-440MHz with Full Duplex available. ★ Extended receive capability:- 130-169.995 & 410-470MHz. ★ 2.5 to 5 Watts output (depending on battery pack). ★ High or Low switchable RF output. ★ Step sizes:- 5/10/12.5/25/50kHz (user programmable). ★ Keyboard programmable repeater offset (0-39.9MHz). ★ Reverse repeater mode. ★ Priority Channels available on both bands. ★ Each band has 10 memories for frequency and repeater offset. ★ Dual synthesised VFO's. ★ User programmable CALL button (instant QSY to your favourite channel – either band). ★ Numerous scanning modes (Pause or Busy – memories – band etc.). ★ Auto Power Off – with Alarm (4mA current drain on standby). ★ Battery Save on receive – 9 user programmable Rx/Off ratios. ★ Vacant Channel Search – for easier QSYing. ★ Lock – disables keypad and/or PTT. ★ Squelch Off button (saves twiddling the knob). ★ Low Battery indicator. ★ Easy to read Liquid Crystal Display with backlight. ★ LCD S/Power output meter. ★ Can be powered directly from a car's cigar lighter (5W output). ★ Keypad or Rotary Knob frequency selection. ★ Dimensions:- 173mm H x 60mm W x 34mm D.


★ ★ ★ ★ ★

AS THE SOLE IMPORTER OF STANDARD EQUIPMENT IN THE UK, WE ARE ABLE TO OFFER A FULL BACKUP SERVICE AND CURRENT SPARES FROM STOCK.

★ NEW ACTIVE ANTENNA ★

ATTENTION ALL SCANNER USERS – We are now able to supply a lightweight and robust *active* antenna that covers 20-1300MHz! It has a built-in high sensitivity, low noise amplifier which has a centre band gain of 15dB. The DC supply from the optional power supply is fed through the co-axial cable – there are no separate DC feed wires.

FOR THE FLAT DWELLER – This antenna measures just 24" by 2 1/2" **£89.00** (p+p £3.00)
(Please note – this antenna cannot be used for transmitting) **Optional p.s.u. £9.50**



400 EDGWARE ROAD,
LONDON W2
01-723 5521 Tlx 298765



Normally 24hr despatch
but please allow 7 days
for delivery.



NEAREST TUBE:
EDGWARE ROAD
PADDINGTON

OPENING TIMES:
9.30am-5.30pm Mon-Fri.
10am-4.30pm Sat.

LARGEST STOCK IN SOUTH EAST OF:

ICOM
KENWOOD
YAESU
ALINCO
JAYBEAM
WELZ
DIAMOND
TONNA
ADONIS

Order with confidence from the company that has been serving amateurs for 15 years.

24 hour delivery on major items.

OUR RISK. YOUR SATISFACTION!

ALINCO IT'S CATCHING ON

----- FAST -----

DUAL BANDER

- ★ 2M/70cm
- ★ 25 Watts
- ★ Full Duplex
- ★ Built-in Diplexer/Dual VFO
- ★ Small size/21 memories

£449!



ALD-24E

What can you say about this transceiver other than praise? The new ALINCO ALD-24E has brought the cost of dual banders down to a price that makes it a serious option to the 2 metre only rig. Just think of the pleasure of being able to select 2m or 70cm at the press of a button. No aerial switching (duplexer built in) and full duplex operation. The ALINCO actually has two completely separate transceivers built into its small case measuring 5.5" x 2" x 6.5". It has all the features of the ALR-22E (see below) at a huge saving over its competitors. We could mention the optional extended receiver coverage of 138-174MHz & 420-454MHz at no extra charge, but then everybody would want one! So we thought that we'd simply invite you to send for the full colour brochure instead.

ALR-22E 2M FM MOBILE



THE RADIO COSTS

£249

THE SCANNER COMES FREE!

- ★ 25 Watts FM
- ★ 21 Memories
- ★ Rx 138-174MHz
- ★ Mini-size

ALINCO products are hitting the market in a big way. And the ALR-22E must rank as today's best buy. When you buy the ALR-22E you don't just purchase a 2 metre mobile, you purchase a vhf scanner as well. For no extra cost we will extend the frequency coverage to 138-174MHz. All this for a price that puts the competition in the shade! Features include 21 memory channels, programmable scan, priority channel options, programmable splits, reverse repeater button, dual speed scanning, optional delay, back-lighted LCD display, dual vfo, lithium battery back-up, 25/12.5kHz steps, mini size measuring 5.5" x 1.5" x 6.5", up/down microphone control, quick release mobile bracket plus mounting hardware, superb sensitivity, 5 watt low power position, manual or electronic tuning, 12 months parts and labour warranty etc. With a specification like this we suggest you phone for colour brochure, today.

2M MICRO HANDHELD

- ★ 3 Watts FM
- ★ Memory Channel
- ★ Battery Save
- ★ Smallest in World

£189!

ALX-2E

The ALX-2E is a truly pocket transceiver. Capable of 3 watts output it covers the full 140-150MHz using the familiar thumbwheel dial. Features include memory channel, scanning, priority, battery saver, tone-burst, 600kHz shift etc. Supplied complete with nicad pack, AC charger, 12v DC charger, and helical. Accessories available include case, car cigar adaptor, headphone/mic, various batt. packs etc.




BASE STATION OR PORTABLE IT'S UNBEATABLE VALUE!

The Sony ICF 2001D is rightly earning a reputation for performance at a competitive price. No other portable can match its specification, and it performs equally well as a base station. Digital readout to 100Hz and switchable filters for AM and SSB plus comprehensive memories make this the number one choice. Dual speed tuning, scanning, synchronous detector, RF gain control, external ant. socket etc., all go to make the most comprehensive package available at anywhere near this price. Send for colour brochure.

£329
Free
Securicor

SONY ICF 2001D

AM/USB/LSB/CW 0.15-30MHz
76-108MHz 118-136MHz



AN-1 Active aerial £49 + £2 pp

SONY AIR-7

- ★ 0.15-2.2MHz
- ★ 76-108MHz
- ★ 108-136MHz
- ★ 140-174MHz

£247
Free
Securicor



The Sony Air-7 has rightly earned the reputation as one of the best hand-held scanners on the market today. Its superb sensitivity together with rugged construction have proved a winning combination. And it is not only enthusiasts who have realised its potential, a number of government and professional organisations are using them too. Features include digital key entry, 40 memories, band & memory scanning, delay, priority, lockout, key-lock, illuminated dial etc. Send today for the full colour brochure.


NEW 1988 EDITION!

- ★ 26-2250MHz
- ★ No Gaps!
- ★ Aeronautical
- ★ Maritime
- ★ Emergency Services
- ★ PMR & Telephones
- ★ Space & Satellite

Widely purchased by government depts., Official Organisations, Libraries etc.

Completely updated and revised to January 1988, this new edition is packed with the kind of information most enthusiasts ask for! The entries are divided up into band allocations and full details of mobile and base station splits are provided. Professionally printed and illustrated, this is the UK's only comprehensive guide and offered at a sensible price. Available now from stock.

£5.95
p&p £1



NEW EDITION

HF OCEANIC AIRBAND COMMUNICATIONS

Complete updated and expanded, this new 1988 edition provides a comprehensive list of frequencies and editorial about this fascinating subject. Covering both civil and military users, the latest edition of this popular guide will tell you all you could ever wish to know about this fascinating subject. The large A4 format is professionally typeset and provides rapid access to the complete HF aviation network.

£3.50 + 70p p&p

VHF/UHF AIRBAND FREQUENCY GUIDE

A complete list of aviation frequencies of civil & military users. A proper manual with text and photos and free supplement of the latest changes. Don't waste money on cheap photo sheets, get the proper book at this bargain price.

Price £5.95 + 90p post.

**WATERS
& STANTON**

RETAIL & MAIL ORDER:- 18-20, Main Road, Hockley, Essex SS5 4QS.

Tel: (0702) 206835, 204965

RETAIL ONLY:- 12, North Street, Hornchurch, Essex RM11 1QX.

Tel: (04024) 44765

Visa and Access by telephone. 24hr. Answerphone.

The Schottky Diode

In the concluding part of this series, Brian Dance takes a look at applications for Schottky diodes



High Frequencies

The extremely fast switching capability of low-power Schottky barrier diodes combined with their lack of charge storage and low excess noise makes them very suitable for use at frequencies well into the microwave region. They may be employed for voltage clipping or clamping, sampling of fast pulses, fast gating, waveform generation and logarithmic conversion in the sub-nanosecond field.

Schottky diodes are very useful as microwave mixing devices where their low excess noise is a vital factor. The noise figure of the C206009 and of the C206516 Schottky diodes manufactured by Custom Components Inc. of Lebanon, USA, is shown plotted against frequency in Fig. 2.1. These diodes have been designed for use in narrow or broad band mixer assemblies for the 1 to 18GHz range or at even higher frequencies. These silicon planar epitaxial diodes are available as matched pairs for use when accurate tracking between circuits is required.

In mixer applications, the Schottky barrier diode will act as the non-linear element which produces the sum and difference of the two signal frequencies fed into the circuit. Although a single Schottky barrier diode can be em-

ployed as a mixer, it is normally advantageous to employ a number of the diodes in a balanced or in a double-balanced mixer circuit, since this reduces the effects of any noise from the local oscillator. An additional advantage of the use of balanced mixers is the reduction of the amplitude of higher order mixing products unrelated to the input frequency. A double balanced mixer circuit employing four diodes is shown in Fig. 2.2.

Microwave Detector

Low power Schottky diodes are very suitable for use as detectors at any frequency up to the microwave region. A very simple example is shown in Fig. 2.3 for the detection of the microwave radiation being emitted from a radar or other antenna or leakage from a microwave oven. It is wise to monitor the microwave radiation level in such situations for reasons of personal safety.

In Fig. 2.3 the Schottky diode is connected at the centre of a half-wave dipole antenna (which is very short at the frequencies concerned). The rectified signal is filtered and fed to a meter using a balanced circuit. The values of the resistor R1 and R2 should be equal and their total value will determine the sensitivity of the circuit.

A suitable Schottky diode is the 1N5711 which has a 70V reverse breakdown rating and a 0.41V maximum forward voltage rating at a current of 1mA. If used to detect any stray radiation from a microwave oven, the total length of the dipole for the radiation in the 2.5GHz band is only about 600mm. The simple circuit has the advantage of being passive and requires no source of power other than the incoming radiation.

Apart from monitoring large signals, Schottky diode detectors can be employed for the detection of small signals only just above the noise level.

The diode is often fed directly from the antenna, although the use of a preamplifier may produce a better signal-to-noise ratio and improve the sensitivity. Such simple receivers can be used in short range radar and in military counter measures equipment when the sensitivity of the more complicated superheterodyne type of receiver is not required.

Schottky diodes are also very suitable for use in automatic gain control detector circuits including video applications.

Transistor Speed-up

When a transistor circuit is operated so that the transistor becomes saturated, the circuit turn-off times become large owing to the storage of charged minority carriers in the base region. A circuit such as that shown in Fig. 2.4 may be used to achieve higher speed operation. Diode D1 is a 5082-2811 Hewlett-Packard Schottky barrier diode connected between the collector and base of the transistor; an alternative type from the same manufacturer is the HSCH-1001. This diode is connected in parallel with the 5082-3077 *pin* diode (*pin* signifies that there is an insulating "i" layer between the *p*- and *n*-type material.)

If the collector current increases as a result of a change in the current gain of the transistor, the current through D1 increases so that some of the base

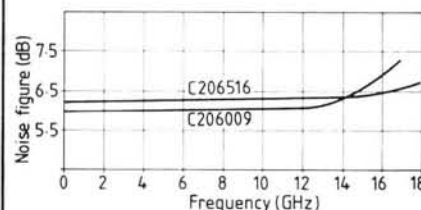


Fig. 2.1: Noise figure against frequency for the C206009 and C206516 devices

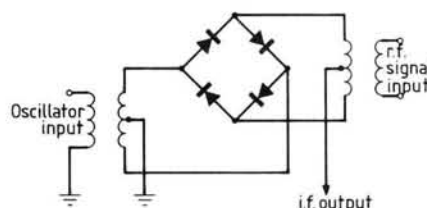


Fig. 2.2: A basic double-balanced mixer circuit

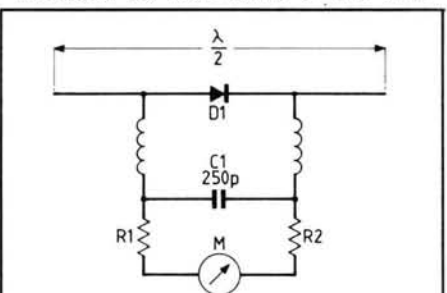


Fig. 2.3: A microwave radiation passive detector circuit

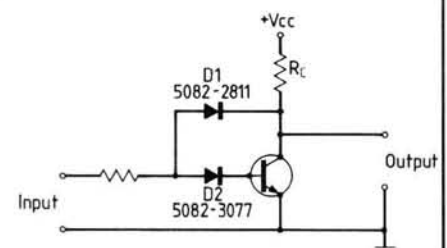


Fig. 2.4: A transistor switching circuit with speed-up Schottky diode

current is diverted to prevent saturation occurring. The function of the *pin* diode is to allow the base current of the transistor to be channelled through D1 to the collector even when the collector and the base are at the same potential. Although this raises the collector voltage during conduction, the transistor switches rapidly to conduction.

Op-Amp Protection

A pair of Hewlett-Packard 5082-2835 low-forward-voltage Schottky diodes is used in the circuit of Fig. 2.5 to protect the input circuit of the operational amplifier from any high voltage spikes. The two diodes are connected back-to-back so that one of them will conduct whatever the polarity of the high voltage transient. Apart from providing transient pulse protection, this circuit will suppress spurious output and reduce the amplifier settling time by preventing excessive excursions of the input voltage. The diodes limit the voltage at the amplifier input to about $\pm 0.3V$. The value of the input resistor should be adequate to limit the diode currents during any high level transients to under 100mA.

The 5082-2835 Schottky diode has been selected for this application because of its fast switching capability, its low forward voltage and low capacitance. It has an effective carrier lifetime of less than 100ps, so it can suppress transient voltage peaks with any duration greater than this value. The low capacitance of the diode (typically 1pF) ensures that the rise time degradation of the signal pulse is minimised.

Optocoupler Speed-up

Many types of optocoupling device employ a bipolar transistor or a high gain Darlington circuit in their output

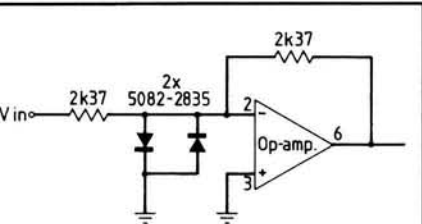


Fig. 2.5: Protecting an op-amp input with Schottky diodes

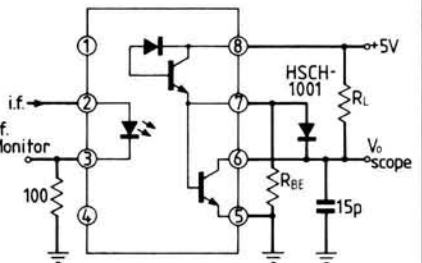


Fig. 2.6: An optocoupler speed-up circuit

Table 1: Some low-power Schottky diodes

Manufacturer Type No.	V _{BR} (V)	V _F at I _F (V)	I _F (mA)	V _F at I _F (V)	I _F (mA)	I _R at V _R (nA)	V _R (V)	C _T (pF)	P _T (mW)	Max T _j (°C)	Remarks
Ferranti ZC2800	70	0.41	1	1.0	15	200	50	2.0	250	200	Effective minority carrier life-time 100p.s., DO-35, SOT-23 & E line
ZC2810	20	0.41	1	1.0	35	100	15	1.2	250	200	
ZC2811	15	0.41	1	1.0	20	100	10	1.2	250	200	
ZC5800	50	0.41	1	1.0	15	200	35	2.0	250	200	
Hewlett-Packard HSCH-1001	60	0.41	1	1.0	15	200	50	2.2	400		Hybrid
5082-2301	30	0.40	1	1.0	50	300	15	1.0	100		Mesh diode
5082-2800	70	0.41	1	1.0	15	200	50	2.0	250		Hybrid
5082-2810	20	0.41	1	1.0	35	100	15	1.2	250		Hybrid
5082-2811	15	0.41	1	1.0	20	100	8	1.2	250		Hybrid
5082-2835	8	0.34	1	0.45	10	100	1	1.0	150		Passivated
5082-2900	10	0.40	1	1.0	20	100	5	1.2	100		Mesh diode
ITT SD101A	60	0.41	1	1.0	15	200	50	2.0	400	200	Hybrid
SD101C	40	0.39	1	0.9	15	200	30	2.2	400	200	Hybrid
SD103A	40	0.37	20	0.6	200	5000	30	50	400	125	Hybrid
SD103C	20	0.37	20	0.6	200	5000	10	50	400	125	Hybrid
Motorola MBD101	4			0.6	10	250	3	1.0			Maximum n.f. 7-0dB
MBD102	4			0.6	10	250	3	1.0			
MBD201	20			0.6	10	200	15	1.5			
MBD301	30			0.6	10	200	25	1.5			
MBD501/502	50			1.2	10	200	25	1.0			
MBD701/702	70			1.2	10	200	35	1.0			
Mullard-Philips BA481	4	0.40	1	0.55	10	2000	3	1.1		125	u.h.f. mixer
BAT81-83	40-60	0.41	1	1.0	15	200	30	1.6		125	Switching
BAT85	30	0.25	1	1.0	100	1000	25	10		125	Switching
(Mullard-Philips also offers a range of 25 microwave mixer and detector diodes)											
Siemens BAT14 series	5	0.41-0.465	1	0.63	10			0.12-0.38	200	150	Beam-lead for up to 40GHz
BAT15 series	5	0.26-0.30	1	0.37	10				200	150	
BAT16	40	0.70	1	2.2	30			0.4	250	150	Up to 1GHz

stage. If the operation of the circuit causes the bipolar output device to saturate, the time required to switch to the non-conducting state will be unnecessarily prolonged.

As shown in Fig. 2.6, the economical Hewlett-Packard HSCH-1001 Schottky diode can be employed to reduce the saturation effects on the transistor turn-off time and hence to reduce the switching time. The HSCH-1001 is shown in parallel with the base-collector junction of the output transistor of a 6N139 optocoupler. This Schottky diode has a lower turn-on voltage than a silicon *pn*-junction, so when the transistor is driven into saturation, this diode bypasses the current which would otherwise enter the base-collector junction. The charge to be removed when the transistor is switched to the non-conducting state is reduced in proportion to the reduction in the current entering the base-collector junction in the conducting state.

Low Power Diodes

Various types of Schottky low power diodes are available from a number of manufacturers for specific applica-

tions. For example, Mullard-Philips produce a BA481 silicon epitaxial Schottky barrier diode with a low forward voltage especially for mixer applications at u.h.f. frequencies.

Hewlett-Packard produce 5082-2811 and 5082-2835 types in which different metals are employed in the Schottky barrier so that different turn-on voltages can be obtained. The 5082-2835 device has the lower value of turn-on voltage and can thus provide the better performance at lower local oscillator amplitudes. In addition, this type has the smaller junction capacitance and series resistance so that its use enables an improved noise figure to be obtained at higher frequencies. However, the 5082-2811 has the lower flicker noise and a higher break-down voltage so that it is preferred for Doppler applications and for phase detection. This device also provides better sensitivity as a detector at video frequencies below 100kHz.

In 1982 Siemens introduced beam-linked Schottky diodes using a guarding technology for microwave frequencies. The maximum noise figure in the C band is 6dB single sideband noise, including an i.f. noise figure of

1-5dB. Lower leakage resistances are said to allow possible applications in mixers and detectors up to 4GHz. These beam-lead products are available as discrete components, as paired matched diodes and also in a four-diode-ring configuration for use as ring mixers to suppress unwanted spurious frequencies.

Microwave Schottky beam-lead devices are also available from Hewlett-Packard with a guaranteed maximum capacitance of only 0.1pF. These devices are produced in a pair configuration using a tri-metallisation process which enables closely repeatable characteristics to be obtained for devices operating over the -60°C to +200°C temperature range. The extremely low capacitance permits the user to achieve low noise figures at high frequencies, for example, 7dB at 16GHz has been quoted.

High beam strength in the leads has been achieved in these devices without sacrificing capacitance by the use of a glass-fill process yielding beam-pull results of 6g. This HSCH-5500 series is intended for use in balanced and in double-balanced mixers in the high performance market. A number of the beam-lead pairs can be assembled into a suitable configuration so as to produce bridge quads, star quads and ring quads for various classes of mixer circuits.

Power Schottky Devices

In power applications requiring rapid switching and/or a low forward rectifier voltage, power Schottky devices may be selected. These characteristics are especially important in switched mode power supply units operating at relatively high frequencies to enable the transformer core size to be minimised and where a high power conversion efficiency is desirable. Frequencies of up to at least 200kHz can be employed in such circuits.

Power Schottky devices bear the same relation to low power Schottky diodes as conventional high power rectifiers bear to low power signal diodes. They contain a metal-to-semiconductor junction, but the junction area is much larger than in the case of low power devices and this results in a high value of the junction capacitance and hence a more limited maximum frequency of operation.

Many types of power Schottky diodes are available. Apart from differences in the power levels at which they can satisfactorily operate, different metals may be used to form the barrier with the semiconductor material; the latter is normally *n*-type silicon. Power Schottky diodes using chromium, platinum, molybdenum and tungsten as the metal side of the junction are readily available. As with normal power diodes, a wide range of current ratings is available with various junction areas, whilst the encapsulation

Table 2: Typical power rectifier Schottky diodes

Manufacturer Type No.	V _{BR} (V)	V _F (V) at I _F (A)	I _R (mA)	Max. mean rectified current (A)	Peak surge current (A)	C _T (pF)	Remarks
General Instrument							
SB120/180	20/80	0.55/0.75	1	1	40	70	50°C/W
SB520/580	20/80	0.45/0.75	3	3	150	180	25°C/W
SB1620/80	20/80	0.55/0.65	8	10	250	900	3°C/W
SB3020/80	20/80	0.55/0.65	15	15	300	1200	1.4°C/W
International Rectifier							
11DQ03	30	0.55	1	6	48		
10TQ030	30	0.76	20	15	305		
20FQ045	45	0.68	60	180	680		
40CDQ45	45	0.91	40	20	455		
ITT							
1N5817	20	0.45	1	1	100	50	
1N5818	30	0.55	1	1	100	50	
1N5819	40	0.60	1	1	100	50	
Motorola							
1N5828	40	0.50	15	15	500		
1N6095	30	0.86	78.5	25	400		
BYS35-50	50	0.77	70	35	600		
1N6098	40	0.86	157	50	800		
MBR6045	45	0.80	157	60	800		
MBR7545	45	0.90	220	75	1000		
Mullard-Philips							
BYV20-30	30	0.60	15	15	300	520	
BYV21-45	45	0.55	30	28	600	1150	
BYV22-40	40	0.55	50	60	1000	2100	
BYV23-45	45	0.55	70	80	1500	2500	
Siemens							
BYS21-90	90	0.9	1	1	50		
BYS26-90	90	0.9	3	3	120		
BYS24-90	90	0.9	2×5	2×5	120		
BYS28-90	90	0.9	2×12.5	2×12.5	250		
BYS71	60	0.73	75	75	1000		
BYS76	45	0.66	75	75	1000		
BYS80	50	0.74	2×30	2×30	600		
BYS95	60	0.89	2×60	2×60	855		
BYS97	60	0.80	2×100	2×100	1425		
Unitrode							
USD1120	20	0.45	1	1	50		80°C/W
USD1140	40	0.50	1	1	50		80°C/W

must provide a suitable thermal resistance to the heat sink, if any.

Very low forward voltage drops can be obtained at moderately low forward currents by the use of chromium as the metal forming the barrier junction. However, the use of chromium results in greater reverse leakage currents than when certain other metals are employed.

In many applications it has been found that the use of platinum to form the barrier with the semiconductor material can result in the smallest power losses, since devices using this metal have a low forward voltage drop even at high currents (for example, about 0.7V at about 200A). In addition, the devices have a low leakage current. Use of molybdenum or tungsten as the metal forming the junction tends to result in Schottky rectifier devices which have a performance intermediate between devices using chromium and those which use platinum.

According to Motorola, tungsten barrier devices can have the lowest leakage current per unit junction area with platinum containing devices the second best in this report. However, the leakage currents of all Schottky devices tend to be considerably higher than in comparable silicon *pn* devices. Values of the order of 50mA can be found at 50V at 125°C. This implies that the power losses in the non-conducting part of the cycle may be quite high, although the power losses in the conducting part generally account for the major part of the losses.

Schottky barrier junction capacitance values are typically some four or five times that of comparable *pn* junction devices and this increases the switching time to the non-conducting state. Nevertheless, the switching time of the Schottky barrier devices is normally smaller than that for *pn*-junction power diodes.

One of the major technical disad-

vantages of the use of Schottky power devices is the temperature dependence of the barrier voltage. However, Schottky power diodes tend to be more expensive than the ultra-fast recovery *pn*-junction devices which are in turn more expensive than the so-called fast recovery types. Many of the major semiconductor manufacturers produce Schottky power rectifiers with ratings of up to about 80V and mean forward currents of up to about 100A. Siemens offer power module Schottky rectifier units each containing two diodes with ratings of up to $2 \times 100A$ and reverse voltages of up to 60V. They are mainly

Table 3: A comparison of typical Schottky diode characteristics when various metals are employed in the junction

	Potential barrier (V)	V_F @ rated I_F (V)	Leakage Current at max V_R (mA)
Chromium	0.58	0.8	250
Molybdenum	0.56	0.75	60
Platinum	0.85	0.8	10

intended for use in switched mode power supply units. Amongst the advantages claimed for these units is the reduction of the wiring carrying high frequencies to a minimum and a corresponding reduction in interference

from the switching frequency together with a reduction in equipment size.

Schottky power diodes are used in circuits which are basically similar to those in which high power conventional diodes are employed. **PW**

BOOKSHELF

GUIDE TO UTILITY STATIONS—

Sixth Edition

by Joerg Klingenfuss

Published by Klingenfuss Publications

Available from the Practical Wireless Book Service

170 x 240mm, 494 pages. Price £19.00 plus 75p


P&P

ISBN 3 924509 88 3

This annually updated 494-page book covers the reception of all types of utility station between v.l.f. and 30MHz. For those of you who want even more up-to-date information there is a supplement service available which gives you an update in April and the following August! The range of information included in this book is truly amazing making it the short wave listeners' "bible".

The first chapter deals with frequency allocations and covers the entire spectrum from d.c. to 150MHz. As well as the usual tabular representation of the spectrum, extracts from the international radio regulations are published

Klingenfuss
GUIDE TO UTILITY STATIONS
Sixth Edition



which give the full technical definition of each allocation.

The main frequency list which is some 248 pages long lists 15802 frequencies between 9kHz and 30MHz. The format used for the display of the data is the

frequency followed by the callsign, location including country, mode and any operational notes. As the list also includes voice transmissions the utility stations are highlighted by employing bold type.

A very comprehensive callsign list comes next which is very well presented in that against each callsign is the station name and location followed by all the frequencies used by that call. This is very useful for identifying new stations when all you have is the callsign. The chapter preceding the callsign list gives a selection of the regulations regarding the construction and use of callsigns which is very interesting.

Press stations are given a special mention starting with an alphabetical list of countries and their press agencies. This list also gives the transmission times and frequencies of all the stations mentioned. The

next list I have found to be invaluable as it comprises a chronological list of press services. In order to find an active press station all you have to do is check against this list for the required time of day and you can instantly see which stations and frequencies are in use.

The next chapter is for the FAX operator and comprises a list of transmission schedules and frequencies for all the main FAX stations.

The final schedule concerns the NAVTEX navigational and meteorological warning service on 518kHz. Listed here are all the active stations along with their individual transmission times and identification details.

The remaining chapters cover the complete Q, Z and signal reporting codes along with a host of definitions and regulations, there are even two fold-out maps showing the world and regional air route areas. **G4WNC**

GUIDE TO FORMER UTILITY TRANSMISSIONS—

Third Edition

by Joerg Klingenfuss

Published by Klingenfuss Publications

Available from the Practical Wireless Book Service

170 x 240mm, 126 pages. Price £8.00 plus 75p P&P

ISBN 3 924509 43 3

This manual is built on receptions of utility stations from the sixties until the recent past. Listed are the frequency in kHz, callsign, name of the station and ITU country/geographical symbol and the types of modulation used. Both old and new callsign allocations or location names may be listed for several stations, this depends on the callsign or location name used during the last monitored operation on the respective frequency.

Klingenfuss
GUIDE TO FORMER
UTILITY TRANSMISSIONS
Third Edition



Nowadays virtually all overseas radiotelegraph and radiotelephone stations have disappeared from the bands. The technical details of these circuits have been deleted from official files and they are only reactivated if the satellite channel breaks down. On the other hand, frequencies used years and decades ago for overseas radiotelegraph and radio telephone traffic nowadays carry modern electronic communication. Thus, "historical" frequencies and callsigns listed can be a valuable source of information for the identification of "new" and "unknown" stations.

These aren't the only new books in our Book Service, others are:

Amateur Radio and Electronics Study Guide 3rd edition by Ian Ridpath ZL1BCG

Level II Radio and Electronics Theory by Ian Ridpath ZL1BCG

More Advanced Power Supply Projects by R. A. Penfold.

See page 42 for more details.

**SOUTH MIDLANDS
COMMUNICATIONS**



POLARPHASER II



**70cms
VERSION
NOW
AVAILABLE**

Have you ever wanted to control the polarisation of your xy crossed Yagi from RH-LH, CIRCULAR, VERTICAL or HORIZONTAL, even whilst transmitting? Then this revolutionary product is what you have been waiting for!

The SMC POLARPHASER enables you to alter the polarisation of your aerials continuously through the full 360°.

For satellite users the benefits to be obtained from instantaneous shack control of polarisation are obvious, enabling effective utilization of receive capabilities and power resources along with the ability to reduce or even totally eliminate co-channel interference for terrestrial use.

	2 metre	70cms
VSWR	less than 1.5:1.	less than 1.3:1
Frequency	144-146MHz.	430-440 MHz
Power	150 Watts.	100 watts
Connectors	SO239 or 'N' (please specify).	'N' type

£49.00 inc VAT (SO239) £69.00 inc VAT

£54.00 inc VAT ('N') P&P £2.25



UK Patent No. 2157894A. Manufactured by S.M.C. Design by G2HCG

SEND LARGE SAE FOR DETAILS
SOUTH MIDLANDS COMMUNICATIONS LTD.
FREEPOST

EASTLEIGH, HANTS SO5 5ZO.

Tel (0703) 255111. Telex 477351 SMCMM G. Fax: (0703) 263507

S.E.M.

**Manufacturers and Suppliers
of Communications Equipment**

**UNION MILLS, ISLE OF MAN
Telephone: (0624) 851277**

S.E.M. ORM ELIMINATOR. Unique design gets rid of any local interference. Connect in your aerial lead and removes QRM before it gets to your receiver (you can transmit through it). Any sort of interference, it can be next to your rx (your computer) or several miles away, e.g. power lines. £69.50 ex stock.

S.E.M. TRANZMATCH MKIII. The only Aerial Matcher with UNBALANCED and TRUE BALANCED OUTPUTS. 1 kW 1.8-30 MHz, £120. Built-in EZITUNE, £39.50. Built-in Dummy Load, £9.90. Ex stock.

EZITUNE. Allows you to TUNE UP on receive instead of transmit. FANTASTIC CONVENIENCE. Boxed unit, £45.00. P.C.B. and fitting instructions to fit in any ATU, £39.50.

FREQUENCY CONVERTERS. V.H.F. to H.F. gives you 118 to 146 MHz on your H.F. receiver. Tune Rx. 2-30MHz. £49.50 ex stock. H.F. to V.H.F. gives you 100 kHz to 60 MHz on your V.H.F. scanner. £49.50 ex stock. Plug in aerial lead of any receiver.

TWO-METRE TRANSMATCH. 1kW, will match anything. £32.00 ex stock

DUMMY LOAD. 100 W. THROUGH/LOAD switch. £24.00 ex stock.

VERY WIDE BAND PRE-AMPLIFIERS. 3-500 MHz. Excellent performance. £32.00 or through when OFF, £37.00 ex stock.

R.F. NOISE BRIDGE. 1-170 MHz. Very useful for aerial work. £45.00 ex stock.

IAMBIC MORSE KEYS. 8-50 w.p.m. auto squeeze keyer. Ex stock. Ours is the easiest to use. £45.00. First class twin paddle key, £20.00 ex stock.

TWO-METRE LINEAR/PRE-AMP. Sentinel 40: 14x power gain, e.g. 3 W - 40 W (ideal FT290 and Handhelds), £85.00. Sentinel 60: 6x power, e.g. 10 W in, 60 W out, £95.00. Sentinel 100: 10 W in, 100 W out, £135.00. All ex stock.

H.F. ABSORPTION WAVEMETER. 1.5-30 MHz, £39.50 ex stock.

MULTIFILTER. The most versatile audio filter. BANDPASS H.P. L.P. and two notches. Frequency and Bandwidth adjustable 2.5 kHz-20 MHz, £75.00 ex stock.

HIGH PASS FILTER/BRAID BREAKER. Cures T.V.I., £7.50 ex stock.

CO-AX SWITCH. Three-way + earth position. D.C.-150 MHz, 1kW, £25.00 ex stock.

12 MONTHS COMPLETE GUARANTEE INCLUDING TRANSISTORS

Prices include VAT and delivery. C.W.O. or phone your CREDITCARD NO. Ring or write for further data. Orders or information requests can be put on our Ansaphone at cheap rate times.

GAREX ELECTRONICS WEATHER SATELLITE SYSTEM

This is the genuine MICROWAVE METEOSAT system, 24 hour geostationary (prediction charts not required).

Not to be confused with cheaper, computer add-on devices that normally utilise the VHF Satellites which are only usable for a few minutes at a time.

Our complete plug in and go package requires no computer, no software, and can be up and running, including dish alignment within 10 minutes.

Nothing more to buy: Dish, Microwave Receiver, Frame Store, 12" B/W Monitor AND ALL PLUGS & CABLES **£995.95**
Expandable to include VHF Satellites and colour. Designed by Timestep Electronics, now supplied by Garex.

VHF SYSTEMS

VHF Active Antenna + 35mm cable	£74.75
VHF 10 Channel Receiver	£155.25
Colour Frame Store (suits VHF & Microwave)	£454.25
SAE for full details and prices of other 'separates'	

GAREX VHF RECEIVERS

The celebrated Timothy Edwards designs now owned & manufactured by GAREX.

- ☆ A simple but versatile design capable of covering spot frequencies in the range 25-200MHz.
- ☆ Excellent sensitivity (typically better than 0.4uV for 12dB SINAD).
- ☆ Double superhet (10.7MHz and 455kHz IFs).
- ☆ Choice of IF bandwidths from weather satellite to '12.5kHz' PMR standards.
- ☆ The basic receiver is single channel crystal controlled. Multichannel options.
- ☆ 2 watt audio output stage having a low quiescent current.
- ☆ Size: 153 x 33mm. Requires 10-14v DC supply

PRICES:

Stock Versions: (fully assembled, aligned & tested boards) 6m, 4m, 2m & Weather Sat. versions: **£49.95**

Complete cased versions & special options: details & prices on request. Crystals can be supplied if required; most popular 2 metre frequencies and the currently active Weather satellites are readily available. Crystal prices on request.

Mains power supply module: **£15.50**

THE GAREX VHF PREAMPLIFIER

- ☆ Compact size: 34x9x15mm
 - ☆ Up to 26dB gain
 - ☆ Can be made for any frequency in the range 40-200MHz
 - ☆ 3dB bandwidth ±3MHz (at 145MHz)
 - ☆ Uses BF981 (0.7dB NF at 200MHz)
 - ☆ Input & output impedance 50 ohms
 - ☆ 1dB compression: +10dBm
 - ☆ Saturated output: +15dBm
 - ☆ Supply voltage 8-17v DC at 5-10mA
- Stock Versions: (fully assembled, aligned & tested boards) 6m, 4m, 2m, & Weather Sat: **£11.45**
Other versions: prices & details on request.

☆ NEW ☆ HIGH PERFORMANCE 2 METER PRE-AMPLIFIER

- ☆ 3 band-pass stages for improved selectivity.
- ☆ 16dB gain with 1dB NF.
- ☆ RF switched (failsafe action); gas-filled relays assembled, tested PCB (boxed version on request) **£42.50**

Main Distributors for REVCO ELECTRONICS LTD.

Ask for details of the latest REVCO "Whippet" and "Kwikfit" antennas and solderless co-axial adaptors (see PW June 87).

Prices include UK P&P and 15% VAT

Ask for details of our Interest Free Credit



GAREX ELECTRONICS

HARROW HOUSE, AKEMAN STREET, TRING HP23 6AA

TEL: TRING (044282) 8580

and CHEDDINGTON (0296) 668684

Callers by appointment only

Constructional

This little set was designed by the Rev. G.C. Dobbs G3RJV to use a commodity not often heard of these days; surplus equipment. It covers a very useful chunk of the v.h.f. spectrum, incorporating amateur and airband frequencies.

Modular VHF Monitor Receiver

Without being too morose about the "good old days" of amateur radio, I do have fond memories of the 1950s when I first began my radio construction. It was the age of government surplus equipment: the vast junk yard of World War II was our playground. In those early days everything I owned in radio was either a piece of war-surplus equipment, usually modified for my own purposes, or built from components culled from surplus sources. Had it not been so, I may never have entered the hobby.

That particular period did produce a breed of radio constructors who were frugal and ingenious. They often adopted a back to front approach to construction. Rather than deciding what they wished to build, designing or choosing a circuit and then gather the required components, more often than not they began with a cheap piece of surplus equipment or set of components and then worked out what they could produce. Taking what was in hand and making it perform a useful function, or seeing if a need could be fulfilled from what was available, gave rise to all manner of interesting and innovative ideas.

These days it is more difficult to find useful "pickings from the rich man's table". Some component bargains can be had from radio rallies which are certainly gleanings from the electronics industry, but that industry does not often offer complete items or circuit boards which are easily usable in amateur radio. There is a vast radio industry supplying all manner of radio and entertainment electronic "bric-a-brac", but the gulf between the techniques used in entertainment radio and serious amateur radio is now wider than ever before. In the past I have

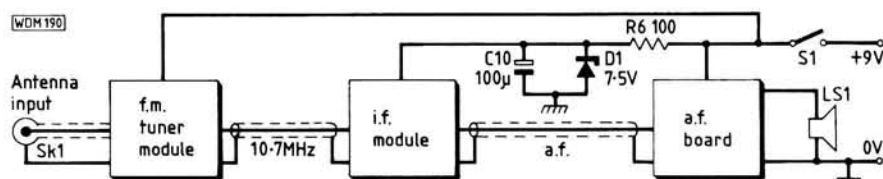


Fig. 1: Receiver block diagram

modified cheap a.m. radios to receive 1.8MHz amateur band transmissions with almost acceptable results. Although by the time I had produced a satisfactory result it would probably have been as easy to build a simple direct conversion receiver.

Two Useful Modules

This article does attempt to take a surplus item from the radio entertainment industry and turn it into a useful amateur radio item. In fact it takes two items, both of which are cheaply available modules, and with very little extra circuitry produces quite a decent little v.h.f. monitor receiver.

John Birkett, the radio component specialist in Lincoln, seems to hold large stocks of two modules which appear promising for the radio amateur. They are an f.m. tuner head made by Toko and a.m./f.m. intermediate frequency amplifier and detector module made by Mullard. Both of them, although slightly dated, seem to be above average quality for entertainment grade units.

As they are, the two used in conjunction with an audio amplifier would produce quite a good little mono f.m. tuner. When I first obtained them I did just that feeding them into my main audio amplifier with pleasing results. The interesting question for the radio amateur is—can the f.m. tuner front

end module be modified to receive a more useful range of frequencies? This little module can be modified to receive higher frequencies and that modification is very simple. With the removal of three capacitors and a little realignment of the input tuning coils, the tuner module will cover about 110 to 150MHz. This is a very useful frequency range offering the 144MHz amateur band and airband frequencies. In short, it makes a very handy monitor receiver.

The complete receiver and inter-module wiring is shown in Fig. 1. The modified f.m. tuner module receives signals in the 110 to 150MHz and converts them to the intermediate frequency of 10.7MHz. A screened lead takes the 10.7MHz signals to the input of the i.f. module. The i.f. module provides amplification of the signal and demodulates the f.m. signal to produce an audio output. This module requires a 7 to 8 volt supply which is achieved with the 7.5 volt Zener diode D1. Resistor R6, in series with supply rail, limits the current to D1 and also forms a decoupling network with C10. Another screened lead takes the low level audio signal to the audio amplifier module. This provides the final amplification, including a volume control, and drives a small loudspeaker.

The Audio Amplifier Module

It makes sense to build receivers in reverse, that is, to begin at the audio stages and work towards the antenna input. Adopting this method, the constructor begins with an audible signal, making it possible to check the stages as the construction proceeds.

The audio module is the only one of the three modules that requires the building of a circuit board. The circuit for the audio amplifier module is shown in Fig. 2. The circuit is simple and based around the popular and

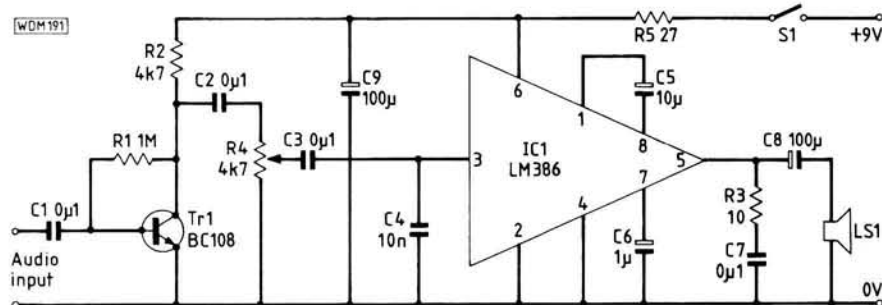


Fig. 2: Audio amplifier circuit diagram

inexpensive audio device, the LM386. This is a small but useful audio amplifier in a 8-pin d.i.l. package which is capable of delivering around half a watt of audio power to an 8 ohm speaker. It has the advantage of a low quiescent current, making it suitable for use with a battery supply. The receiver is powered from a 9 volt, S106 (PP6), battery. The level of audio output from the i.f. module is such that extra amplification is required. This is provided by a single pre-amplification stage (Tr1). Potentiometer R4 is a volume control which includes the On/Off switch (S1).

The audio amplifier is built on a small circuit board, the layout of which is shown in Fig. 3. The prototype amplifier was built on a piece of perforated circuit board with a 0.1in matrix of holes: this is often called "Perf Board". The method of mounting the finished p.c.b. is somewhat unusual. Four short lengths of tinned copper wire (about 22 s.w.g.) emerge from the ground connection points around the board and these are bent into an "L" shape to provide legs to support the board. These wires fit neatly along the edges of the i.f. module to mount the a.f. board above the screening box of that module. The result is neater than it sounds and does enable a tight layout and short leads between the two modules.

There are two coupling capacitors C2 and C3 between the amplifier and the pre-amplifier stages. The cautious constructor could well build the audio module from C3 to the speaker output and test the amplifier first. Connect the speaker and the 9 volt battery supply and a slight hiss should be heard from the speaker. Touching the input side of C3 ought to produce a distinct buzz from the speaker. The rest of the circuitry around Tr1 can be completed and the volume control R4 added. Screened wire is used for the leads to and from R4. The complete audio amplifier module can be powered up and touching the input side of C1 should produce a very loud buzzing sound. Check that R4 has been wired the correct way round and a clockwise rotation of the control increases the gain of the module.

The I.F. Module

The Mullard LP1171 i.f. module is supplied already aligned and ready for use. It is housed in a tinplate casing and has a series of terminal wires arranged at either end. The layout of the module is shown in Fig. 4.

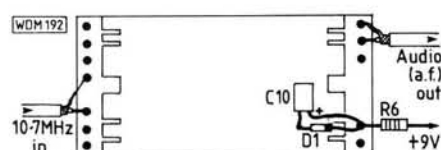


Fig. 4: External connections to i.f. module


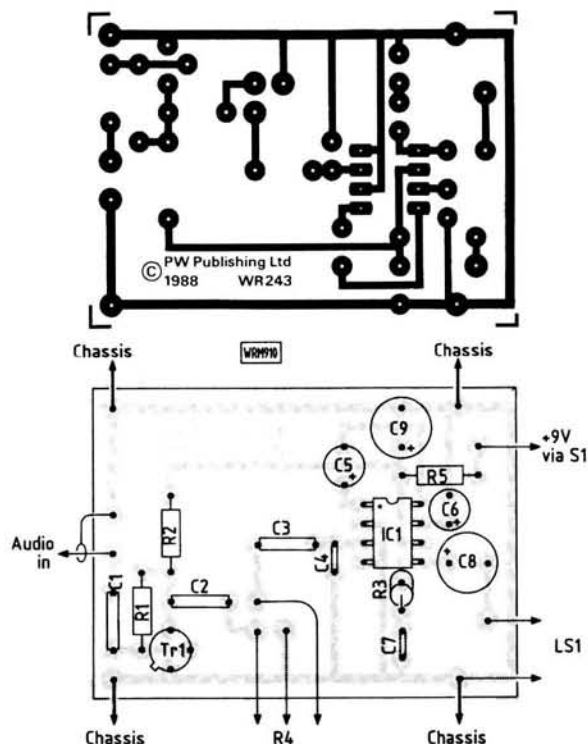


Fig. 3: Full size p.c.b. track pattern and component placement diagram of audio amplifier stage

It helps to mount the audio amplifier on to the i.f. module casing before any connections are made. The audio module is placed above the side of the i.f. module casing which has the connection wires. This, in fact, is the underside of the module as it was originally designed to fit onto a larger circuit board with the wires providing connections. The wire tags on the audio module, which have been bent down at right angles to the board, should fit down the sides of the i.f. module case. These are soldered to the sides of the i.f. module case raising the underside connections on the audio module

board clear of the case. The end of the audio module bearing the input connections faces towards the audio output pin on the i.f. module (see Fig. 4), a short screened lead joins these two points together.

The i.f. module supply components, R6, C10 and D1 are "hard wired" to the modules. Capacitor C10 and D1 are grounded directly onto the casing of the i.f. module. Use a little solder to tin a small area of the case first and the leads from C10 and D1 will easily solder onto the metal case. Resistor R6 is soldered to the junction of C10 and D1 the bent back to suspend on its

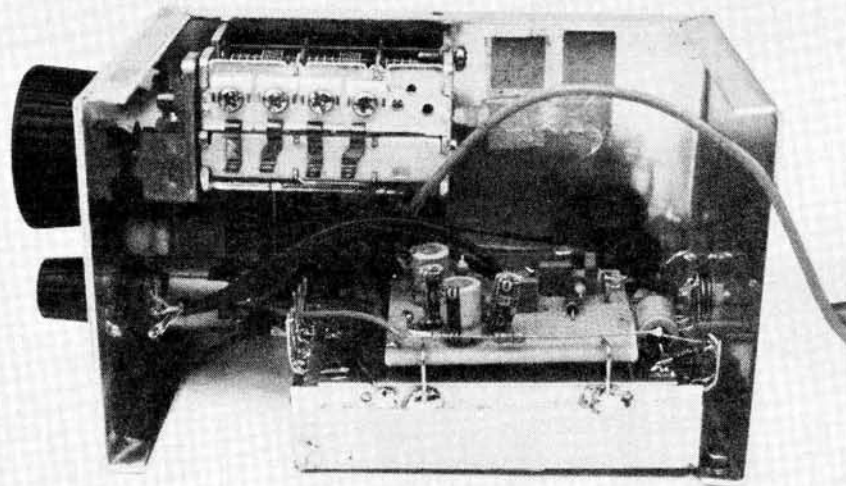

leads and make a connection to the 9 volt input connection on the audio module. The wire lead between R6 and the audio module 9 volt input point may require a short extension wire.

The combined modules can now be tested. Apply power and check with a voltmeter that 7.5 volts is present on the supply lead of the i.f. module. Touching the input connection of the i.f. module (10.7MHz in Fig. 4.) should produce a noise from the speaker. If an external antenna is available, connect this to the input lead and quite a lot of noise will be heard if the modules are working.

The FM Tuner Module

The circuit of the Toko f.m. tuner module is shown in Fig. 5. It has three stages: an r.f. amplifier (TR101), a mixer (TR102) and the local oscillator (TR103). The three stages are tuned by a three-gang variable capacitor (C101/C105/C116). These variable capacitor sections each have a trimmer and another fixed, parallel, padder capacitor. Removing the three fixed capacitors changes the frequency coverage of the tuner. The capacitors in question are C103, C104 and C115. Removing these capacitors and realigning the input tuning trimmers allows the f.m. tuner module to tune around 110 to 150MHz.


To allow this modification to take place the tinplate screening box fitted over the top of the f.m. tuner module must be removed. This screen is held in place with large blobs of solder and these must be removed. A solder suction pump is helpful but melting the solder and gently easing the screen from its mounting points is not too difficult.

When the screen has been removed the f.m. tuner module board is exposed as shown in Fig. 6. The capacitors for removal are easily located as they are the three disc capacitors mounted closest to the variable capacitor. They are in a row almost up against the body of the three-gang variable capacitor. Removal is easy, with or without a desoldering pump.

The connections to and from the f.m. tuner module are shown in Fig. 6. A screened lead is required for the 10.7MHz signal path between the f.m. tuner and i.f. modules in addition to the antenna input leads. It is a good idea to wire up the tuner to the other modules before the final mounting into a case.

Connect the f.m. tuner module with temporary leads to the i.f. module, battery and antenna. In most areas a piece of wire a metre or so long can be used as a testing antenna. If a suitable external antenna exists this can be used. The f.m. tuner module input tuned circuits can be peaked for the new frequency coverage.

The two screw adjustable trimmers nearest the shaft end of the variable capacitor are those which affect the

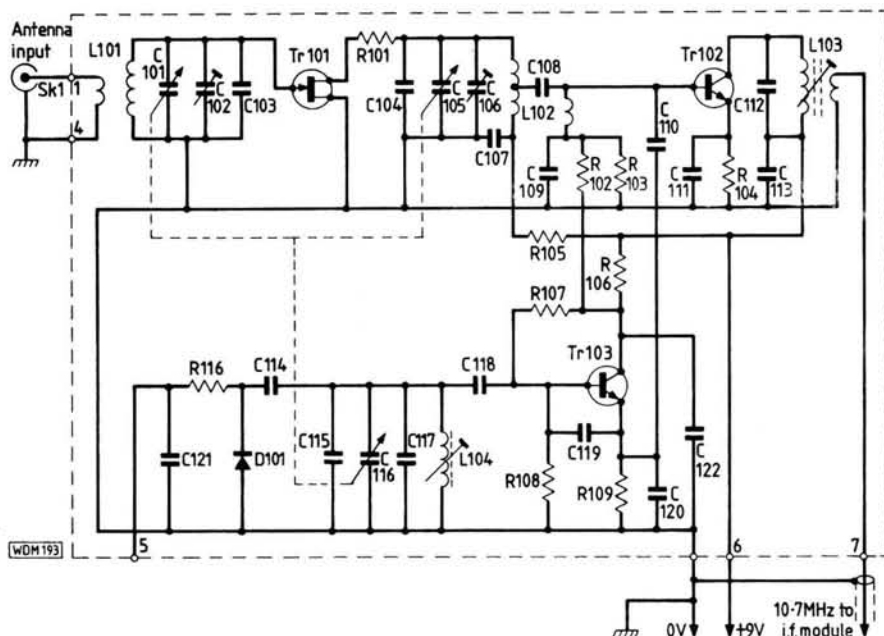

will just fit onto the lid of the case over the variable capacitor. Holes are drilled in the lid of the case to release the sound and the speaker is held to the underside of the lid with a little epoxy resin.

Finishing off the case is largely a matter of taste and facility. I used my simple but effective method of having a thin card false front. The card is marked with the required legends and covered with transparent sticky backed plastic film for a durable finish. The lid of the case, which is the top and sides, is covered with black sticky backed plastic.

Using the Receiver

Unfortunately the receiver, as described does not have a tuning scale. This is because there is a built in slow motion drive on the tuning control shaft. It is difficult to translate the rotation of the capacitor vanes into movement on the front panel but doubtless other constructors will manage it. I have used the receiver with a v.h.f. amateur band vertical antenna mounted on my roof, and the results have been surprising for its simplicity. I have heard many local amateurs, including the two closest repeaters plus air traffic signals from Ringway Airport.

PW

SHOPPING LIST

Resistors

0.25W 2% Carbon film

10Ω	1 R3
27Ω	1 R5
100Ω	1 R6
4.7kΩ	1 R2
1MΩ	1 R1

Potentiometer with s.p.s.t. switch

4.7kΩ Log	1 R4
-----------	------

Capacitors

Monolithic ceramic

10nF	1 C4
0.1μF	4 C1-3,7

Electrolytic p.c.b. type 16V

1μF	1 C6
10μF	1 C5
100μF	3 C8-10

Semiconductors

Transistors

BC108	1 Tr1
-------	-------

Diodes

BZY88C 7V5	1 D1
------------	------

Integrated circuits

LM386N

1 IC1

Miscellaneous

LS1 8Ω 50mm speaker; Toko f.m. tuner module⁽¹⁾; Mullard LP1171 i.f. module⁽¹⁾; Aluminium box type A45⁽²⁾; Knobs; 6BA nuts, bolts, washers and solder tags; Miniature screened cable; Sticky fixers; Stick on feet; Sticky back plastic; 6-F22 type battery clip; coaxial socket; p.c.b.

(1) J. Birkett, 25 The Strait, Lincoln LN2 1JF. Tel: (0522) 20767

(2) Minffordd Engineering, Sun Street, Ffestiniog, Gwynedd LL41 4NE. Tel: (0766) 762572



Constructional

Kitchen Konstruktion


This time, in No. 4 of his occasional series, Richard Q Marris G2BZQ has some helpful hints on drilling those difficult holes.

If you are a home constructor in electronics, then from time to time you may wish to drill a hole part-way through a thickish piece of material such as metal, Perspex, wood, etc.

So what happens? Well, with your wheelbrace or electric drill and a small sharp (?) drill bit, you anchor the job in question and drill away with enthusiasm. Then, depending on your enthusiasm and the sharpness of the drill bit, you drill right through the target material and probably through the table underneath; or, if you're too careful, chances are the hole will not be deep enough. So you have another go, and this time you go right through; sounds familiar doesn't it!

Answer

Why struggle, when the answer to this problem is so simple. Just put your

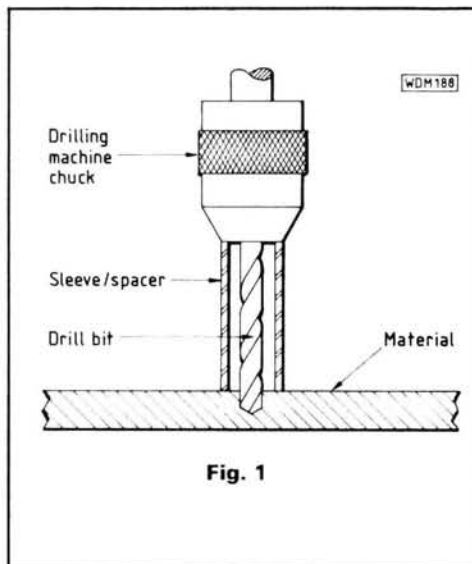

selected twist drill into the drilling machine chuck; carefully measure the length of drill visible, and then the depth of the hole required. Subtract the hole depth from the visible length of twist drill, take the resultant measurement and cut a spacer to that length. The spacer can be made from either metal or plastics tubing, old telescopic antennas sections are one source or the shells from discarded ball point pens are another. Take the spacer and place it over the twist drill, and there you have it. The length of twist drill left showing below the spacer is the exact amount needed to drill the depth of hole you require (Fig. 1.).

Both of the materials suggested for use as spacers are easily cut with a Junior hacksaw, and should be easily obtained from your treasured collection of household and workshop junk.

ERRORS & UPDATES

PW "Orwell" Medium Wave Receiver
February / March 1988

Practical Wireless, April 1988

The pin-out detail on Tr2 in Fig. 2.1 is incorrect, the base and collector should be transposed. Resistors R24, 27, 28 are a log law type.

TAKE ADVANTAGE OF THIS GREAT SUBSCRIPTION OFFER

Introducing

Two and three-year subscriptions for *Practical Wireless* readers in the UK

You can save money and avoid the inevitable cover-price increases over the next two or three years!

One Year — £14.00
Two Years — £26.00
Three Years — £36.00

Wherever you live, a Postal Subscription will ensure that you receive your copies of PRACTICAL WIRELESS and/or SHORT WAVE MAGAZINE regularly, through your own letterbox, before it gets onto your newsagent's shelf. Order a Joint Subscription and you will qualify for the Special Discount.

Fill in the Order Form below and post it to: PW Publishing Ltd., FREEPOST, Subscriptions Dept., Enefco House, The Quay, Poole, Dorset BH1 5 1PP (no stamp required). Credit Card Orders taken on (0202) 678558.

Overseas subscriptions outside Europe are now despatched by Accelerated Surface Post for faster delivery.

Please indicate the type of subscription required:

Special Joint Subscription



- ☐ See above (UK) ☐ See SWM (April) ☐ £27.00 (UK)
☐ £18.50 (Overseas) for offer details ☐ £30.00 (Overseas)

(Prices correct at February 1988)

To commence with issue dated

To: PW Publishing Ltd., FREEPOST, Subscriptions Dept., Enefco House, The Quay, Poole, Dorset BH1 5 1PP (no stamp required).

Name

Address

☐ I enclose cheque/PO (Payable to PW Publishing Ltd) £.....

☐ Charge to my Access/Visa Card the amount of £.....

Card No.

☐ Valid from to

Signature

On The Air

On The HF Bands

Reports to Paul Essery G3KFE
287 Heoly-Coleg, Vaynor, Newtown, Powys SY16 1AR

No doubt about it, I must watch what I say; after commenting about the winds and my mast last time, came a night when I got back from the club—a lovely evening—and turned in. Next morning the snow was thick and, in the absence of wind, my longwire had succumbed to gravity. A grounded antenna, covered by a foot of snow, doesn't seem to load up quite the same, somehow!

The bands have very definitely had their good days—and by the same token, the bad ones. Certainly, things are livelier than they were a year ago.

The Bands

Something for everyone, but I wish that more people would get on c.w. and reduce the phone QRM.

The 1.8MHz Band

By the time you receive this, the winter contesting season will be all but over. I have been off the band for some time as my home-brew a.t.u. didn't seem to want to play on this band. Eventually, I dug out an old Joystick a.t.u.—the Joymatch—intended for reception only. Slowly and cautiously I loaded it up and got an s.w.r. down to about 2:1, while I cautiously raised the power. Great stuff, the signal was heard from several miles away—but a couple of days later the snow took the antenna away! However, I'll be back!

Turning to G2HKU, Ted notes ON7BW and ON4CW on s.s.b., plus GM3PPJ, OK3KFP, ON4CW and OZ1W all worked on c.w. Ted now has a Butternut HF6 up and trimmed correctly, so he is now comparing its performance against the G5RV.

Next we have G3BRD (Seaford) who has now proved his antenna system is a winner, 105 countries worked in under one year. It comprises some 28m, vertically polarised, and operated against fifty carefully tuned quarter-wave radials. As John says, the secret of success is to use perseverance and practice the art of hearing the stuff through loads of static. Of course if you have the "real-estate" to play with, horizontals such as Beverages are much easier on the ears. New Year's Day was a cracker for G3BRD with ZL2BT at RS58, HH7PV, TG9NX and XE1HHA on s.s.b., plus c.w. to HZ1HZ, HK7AMV, CO2CB, OX3CS, 6W6JX, UG6GCK, UF6FDR, UI8BGS, UM8MLA, UH9BWD, UA0FM, RA9SSN, UA9NN, UA9YAJ, RA9CTK, 16 W States and thirty Europeans, including 4U1ITU.

GWOIER also likes Top Band. He has a 60-metre end-fed wire for all bands, and has now managed some 41 countries on the band. Three new ones were LZ1, EA6 and YO2 and lots of Europeans were raised, in the middle of which I noted K2RIH. Calls like 6W, 4X4, UL7, UO5, and various Ws were all noted but not raised.

The 3.5MHz Band

As far as I am concerned, the band these days is only used to listen to the QRP boys on the one hand, and for the Sunday-morning natter routine. However, when

the better weather supervenes, perhaps I will find time to get outside and lay out a decent earth mat. Right now if I went on the lawn, I'd sink without trace.

G0HGA (Stevenage) managed 3.5MHz c.w. QSOs using QRP with DL9YA, GM3TMK and IK2HLB.

GWOIER had his first c.w. contact with a YL when he raised Lindy G0GZN in Bognor Regis. Other c.w. contacts included UA9CM, WA8SWM and VE3BCH, not to mention joining the ISWL nets.

GM3JDR (Wick) offered his c.w. two-way contacts to RA9CQQ, UA9CM, VS6DO, W6TSQ, RA0FA, W200AVK, W200AW, ZL4IE, VU2TJW, UA0LCZ, VS6UO, UA9MZW, UM8MBX/UL7Q, 4KOE, ZL1AMO, VE5DX, FY5FE, 8P9HT, J6DX, UA0OA, all W call areas, plus some 79 JAs, during operating spells around 0800-0900Z.

The 7MHz Band

A band which is either loved or hated. GM3JDR loves it, his c.w. two-ways contacts included ZL2UV, VK3AWX, 9N5QL, 9N7YDY, FY5FE, BV2B, D44BC, PR7PO, RA0FA, VS6DO, YB3ASQ, UA0KBC, NC8Q/J6L, OF6XY/SU, 8P9HT, FM5ES, XE1FUX, J6DX, KG6DX, VK4XA, 9Q5NW, P40GD, PY6AN, TF6PS, AL7IF, 9M6ZR, 9Q5DA, VS6VT, PY1ILR, YB0ATA, PZ1AP, KL7XX, VU2VWN, VU2VPE, VS6UO, VS6UP, VK3XB, VK2FEX, YC8XV, HK1KXA, ZS6OU, BY4WNG (at 1420Z, January 7), 9M2FP, CM3JA, VU2JCE, some 200 JAs and 40 W6-W7 operating around 1400Z.

The half-loop at G4XDJ seems to be doing its thing well enough; Brian reports working UZ1, SM6, YU3, UB5, OH5, UA6, PA0, GM4, VK3, ON4, UL8, UA3, EA8, KD2, TA1, UY5 and GW3. Incidentally, Brian is looking for a 9Y QSO on any band—is there a reader who can help him set up a sked?

G3NOF (Yeovil) says he doesn't have a decent antenna for the l.f. bands, but nonetheless Don did make s.s.b. contacts with J56AS and 8P9AF.

On to G2HKU; Ted sent some c.w. out to UA9SAR, WA1LDP/CU2, UF6FBI, VU2SU and UY5TH.

The favoured mode for GWOIER was also c.w., he made it to Y24WA, YT2FU, K4MQG, RB5LVV, and UD6DFF, with GJ4JVP on s.s.b. for a little variety.

The 10MHz Band

Not many reports this time. First and last one is that from GWOIER, who went on 10MHz to find UQ2AS, HB9DMC, UP1BWW and UB4IA.

The 14MHz Band

This is where it all happens. G4XDJ found AL7, UA9, CU2, UG7, K3, W2, NO, N8, W1, OE6, HR1, CT4, OY7, UV3, UA1, TA2, UL8, UA0, VK3, VX1 and VU2.

G2HKU with his limited available time confined himself to his ZL skeds, with ZL3FV on s.s.b.

G0FUS found three of each; s.s.b. to OF8NKO, IG9/IT9ONV and N4ZZ, while c.w. made out with UH9BWD/UH8Y, ZL3UA, and ZL1BLR.

GM4ELV also has three on offer; R1A for a special prefix, 4KOD at the North Pole and ZX8ET Sao Luis Is. (QSL via PR8ET, Box 6911, S. Luis 65000, Brazil).

G3NOF notes that the West Coast Ws peaked with him around sunset time, but no Pacific stations were heard. Contacts using s.s.b. were booked with AX2FRB, BY4RB, FT5ZB, HK1LDG, HL9CU, J50AS, J56AS, JY8VM, N7JD/KP5, OX3KM, VE8DX, VI88ACT (VK Centennial station), many other VKs, VK9AD (Norfolk Is), VK9NS, VK9ZR, VS6DO, YS9LG and 9Y4IBN.

The 18MHz Band

Just one report, GM3JDR worked VK4TL and FY5AU using c.w.

The 21MHz Band

GWOIER remarks a mite ruefully that with the number of EUs and Russians he has worked, the bands all seem full of "Eastern Promise"—but that being said on 21MHz c.w. he managed to repeat the pattern with QSOs with IS0IGV, UT5JCW, UL7AAC and WB2FXX.

G3NOF found the long path in January often open to VK and JA around 0830; the short path has been open between 1130 along with a few YB/YC signals. Asians were noted and heard in the mornings but nothing from the Pacific; North America was noted between noon and 1700, and South America around 1100 and again around 1700. January's s.s.b. crop included AX2PWI, BY5RA, CO1EG, CO7JC, FJ5BL, FR5DX, FY5EM, HK3JEI, HI8GMA, KC7UP and KW7J (Montana), HK1LDG, J20YD, J28EO, J37AE, J56AS, JH3RRP, KG4GN, KG4JO, KH6HBZ, OX3KU, many VKs, VK9YD, VP2E/HB9SL, VP2MDF, VP8BPZ, VU2XX, XE2BBD, W7ODP (Arizona), WA0JYJ (Colorado), WD0T (South Dakota), YC2DGI, 5H1HK, 5N0WRE, 5V7WD, 6W7OG, 6W100AD, 8P9AF, 8P9DX and 8P9EM.

For GM4ELV the QRP made it to CE and VP8BCQ. Dale incidentally is looking for details of the QSL route for TJ1AF; PO Box 2273 Doula was the address given but that route yielded nothing.

Now we turn to G0HZL (Blackpool) who normally is operational from G3IUB in termtime. From home, he has a VK2ABQ beam in the loft and an FT-101B. Apart from the DX listed, Martin has heard GMs and G stations far to the south, such as G3NOF, not normally audible in Blackpool. On the DX front, much has been heard, but contacts have been in the main with USA, Canada, and Russia, the pick of the crop being UA0ALG on phone. Gotaways included VP2EZ, KG4GN, XE, 8P9, YS9DB, TG9GI, WA200HUP, TI2JJP, FR5DX, CN2AQ, 9K2KW, HC1BX, N9CQX/VP2M, 5H3MI, 5X5GK, HI8GMA, J20YD, 9L1SL and 6W7OG, not to mention lots of VKs JA, PY and Ws. It seems as though the loft beam is directional enough but just doesn't lay down a good enough signal to crack the pile-ups. Calls don't result in replies, but frequently get comments about hearing just one or two letters with no solid contacts.

G0HGA offers YU2DS, YU7ACH, UA1AJH and UW3QN with her QRP.

For **G0FUS** (Eastleigh) it was mainly c.w.: AY1ICX, HK4GGK, LU7AMU, LU9EQH, N4NES, PY2XZ, PY3DK, PP5DC, VK2VEW, VK5NPS, VU2BK and ZZ5VMC, while the s.s.b. hooked up with PT7DM and ZC4DX.

Clearly G4XDJ likes this band best; he managed W8, K11, YV5, W3, W1, W4, NJ1, UZ3, HB9, AY9, YC3, CP6, YO4, PT2, VK6, PP2, UO5, 9H4, EC9, PY5, VP5, Z33, HJ1, VP2, FY5, ZP5, AA4, VE5, CU3, UA9, TA1 and WA6.

The 28MHz Band

G3NOF (Yeovil) had the odd African and USA opening, and CP8HD, FH8CB, J87CD, K200USA, KA1BFC/ZS6, NP4CC, S0RASD, VP2MDF, VP8BPZ, W200GSA, W200ZQ, 5H1HK, 5N3BHF, 6W6JX, 8P6JX, 8P6SG and 8P9AF.

G4XDJ (Billingham) has been changing the skywires around; Brian now has delta loops on 14 and 21MHz, plus a half grounded loop on 7MHz to play with, and into them go between 5 and 50 watts on c.w. or 60 watts s.s.b. on 28MHz, the 14MHz loop is forced to load by means of a home-brew Z-match. The results included contact with G0GKO, G0EEK, UW6, G4ZCN and EA8.

Turning to **G4HZW** (Knutsford), Tony sticks to his TS-820 plus quad. In January, auroral conditions were noted on 2nd, 14th, 18th. Interestingly there were weak GMs about by tropo, under the strong auroral stuff. It added to QSOs with 3C1MB, 4Z4MB, 5H1HK (Zanzibar Is), 8P9EM, 8P9GQ, FT5ZB (Amsterdam Is), G4SNA, then LA6BBA SM2RHL, OX3SG in the Ar opening, NP4CC, OF1AF, W4s, TR8JLD, VP8BBZ and YV8CAX.

On to GM4ELV and his QRP. PT2ZDR, J28DN, Z23JO, UM8MIG, 5V5TS, ZS6AOT, T18CBT (twice), FH8CB, ZS6AED, UI8FM, FR/F5QT, ZS6RM, TA3C, KP4JN, KZ9X, K2ZZ, K5KBQ, K5MS, HC1ATG, A22RB, N4NFS, PY1ZAK, UL7ACI, LU7E, LU8AJK, 5L2T, W3FYT/4X, FM5CY, VP2MU, NP4Z, HB9CUZ/5N9 and SVOFE was the listings.

Obituaries

First, Bill Bennett W7PHO, perhaps best known for the "Family Hour" DX Net around 14.226, and for his handling of

QSL chores for many DX stations. Bill was also noted for his help in getting confirmations from the rare Russian republics and zones from contacts on the Family Hour Net. He is one who will be missed, but not forgotten, for we understand the call will be continued by the net, while KA6V will pick up the QSL side. Bill was 78, and we must say that even DXers who hated net operations such as me were always grateful to Bill for his promotion of the concept of DX and help of DXers.

Nearer to home now, Norman Horrocks G2CUZ died on January 6. Norman got his AA licence fifty years ago, and served in WWII in the technical side of RAF signals, serving in UK, in India and the Middle East. After the war, Norman obtained his full call, and was well known to amateurs in the North West; he was a founder member of Ainsdale club, later to be known as Southport and District RC, and served as Hon Sec and Chairman, as well as RSGB's AR. From 1981 onwards Norman suffered a number of strokes which incapacitated him to the point where operating was no longer possible, but he still attended meetings and showed a keen interest. Norman Horrocks will be missed by all.

The third one to pass on was Bill Hatch G0BKL, of Harlow. Bill was in my RAE class one year, but dropped out; several years later, word reached the locals by a roundabout route that Bill was now blind but still interested and eager; so with great help from RAIBC and local amateurs, Bill was eventually coached through the RAE. Then came the B licence, and in the fullness of time, with the help again of the locals, Bill passed the Morse test and got his full call. Alas, he never managed to actually operate on the h.f. bands although the ambition was always there; but at least he was able to enjoy a few years of amateur radio and indeed he was in QSO with G4ITL the day before his sudden passing. Those of us who knew this brave and modest man will miss him.

Happenings

Jim Smith notes that HIDXA's efforts on this Baker & Howland Is one seem to be bearing fruit; March 21-April 8 are the target dates. It had been hoped to operate from Sao Tome before this KH1 activity, but snags have cropped up and S9 will be activated later in the year.

KH5, Kingman Reef & Palmyra Is are in the pipeline according to a note in DX News Sheet, the target being for April.

Something a little worrying springs to mind when we hear that there is a proposal to activate Spratly in March; K6EDV hopes to pull this one off, but it should be remembered what happened to the DLs who tried to activate this one a few years ago.

The "proposed" operations from Marion Is. ZS8 due about now seem to have been hot air; up until December VE3FXT had not applied for a permission, and ZS6RM/ZS6BBY who have themselves applied, have been turned down on the grounds that the International Antarctic Treaty discourages any visitors not engaged in scientific research; and they have gone on record to say that if VE3FXT does apply, he will get the same answer.

Contests

The Biggie here is the CQ WW WPX Contest; s.s.b. on March 26-27, c.w. May 28-29. The rules are the same as for many years past, so all regular participants will know what's what. Single-operator stations can only take 30 of the 48 hours.

March 19-21 is down for the Bermuda Contest; 0001Z Saturday to 2359Z Sunday. You are limited to 36 out of the 48 hours of the contest. Contacts on 3.5, 7, 14, 21, 28MHz. While crossband or cross mode contacts are not allowed, the same station may be worked on each band, successively on phone and c.w. provided there is a thirty minute gap between QSOs on the same band. UK station work Bermudans, US and Canadian stations; exchange RS (T) and QTH. (county for UK). Separate log for each band, and a dupe sheet if you have more than 200 QSOs. First prize is a Trophy to be presented at the Dinner in October; winners will have roundtrip fares and accommodation paid to enable them to be there and collect. Certificates to top scorers as well. Logs to arrive by June 1, addressed to Radio Society of Bermuda, Box HM275, Hamilton HM AX, Bermuda.

**The next three
deadline dates are
March 26,
April 26 and June 1**

VHF Up

Apart from a few auroras, January 1988 was an uneventful month for v.h.f. operators. However, those indulging in meteor scatter work found the Quadrantids quite good.

Postal Delays

Several readers' letters arrived just too late for last month, probably due to the Christmas traffic. Consequently a few Annual Table scores could not be given in their final total.

The only significant change was to the c.w. ladder wherein **Ron Wilson's G4NZU** total of 339 would have earned him third place. In the v.h.f./u.h.f. table, **Ian Harwood G8LHT** ended with 155 points which would have put him in 9th position.

The deadlines given prominently each month really are the last dates for me to receive your letters and it seems prudent to allow two days for first class mail.

Awards News

Congratulations to **Martyn Jones G4TIF** (WKS) who is member number five of the 432MHz QTH Squares Century Club. His claim was processed on Jan 26. From ZM53e he was 101 squares confirmed out of 107 worked. All QSOs were on tropo s.s.b. mode with 18 countries represented.

Martyn started on the band in May 1981 using a Trio TS-700G and Microwave Modules 432/144R transverter, the antenna being a 48-ele Multibeam. His present station comprises a Kenwood TS-770E and SOTA 50W amplifier, the antenna a Tiger 14-ele Silver Seventy at 9m a.g.l. His QTH is 78m a.s.l. He is also member No. 17 of the 144MHz QTHCC, earned on 22 Jan 1982.

John Cornall G6IJM (LNH) was elected to membership of the 144MHz QTHCC on Jan 29. He has 101 confirmed from

YN15d out of 134 worked. 22 countries were listed, 87 QSOs being on tropo, nine via Es and five by Ar propagation.

John was first licensed in 1982 and used f.m. till the start of 1985 when he came to s.s.b. mode. His initial station consisted of an Icom IC-211E and 100W to an 8-ele Yagi. His current equipment comprises a Trio TS-711E, also 100W but to a 17-ele Yagi by Tonna, 16m a.g.l. His Blackpool QTH is less than 8m a.s.l. He is a WAB square collector too.

Any reader wanting information on *PW* v.h.f. awards should send an s.a.e. to the Awards Dept., Practical Wireless, Enefco House, The Quay, Poole, Dorset BH15 1PP.

Worked All Britain

John Fitzgerald G8XTJ, the Publicity Officer for the WAB group, has sent details of proposed activity from area OV00. This is a small area of foreshore at

Practical Wireless, April 1988

the base of 150m cliffs near Ravenscar (YSN).

The date is April 3, the callsign GB10VA manned by several operators including G10VA. It is hoped to have 100W and a 13-ele antenna this trip. G1SGB will be located near the cliff top with 250W and two 13-ele Yagis to act as contact man. Listen out on 144.375MHz s.s.b.

Recent "firsts" in the awards programme include G6ZGO who worked 100 book holders on 50MHz and G6STI who has worked 900 third-series book holders on 144MHz.

Contest Information

March 13, 1300-1700UTC sees the Derby and District ARS 144MHz contest. This is all modes with fixed, /A and /P operation valid. Three sections, full legal power, low power (30W maximum output) and s.w.l. Usual RS(T) and serial number exchanges plus administrative county or Scottish region.

Each contact is worth two points but the club station G3ERD is 10 pts. Final score is QSO points times number of counties with overseas countries, such as ON, PA, regarded as extra counties. Entries to DA-DARS, 119 Green Lane, Derby DE1 1RZ to arrive by March 30.

The last two legs of the 70MHz Cumulatives are on March 13, 1000-1200UTC and the 27th, 0900-1100UTC. Thereafter entries to G5FRE at 15 Ferry Lane, Cavendish Park, Felixstowe, Suffolk IP11 8UR.

50MHz operators will have a short contest on April 2, 1800-2200UTC. Two sections here, F being single-op fixed stations, and O being all others. Radial ring scoring up to 650km, all contacts over that QRB being worth 25 pts. County and country multipliers apply in this event. One point for each different county or country. Because the Scottish regions are large, you can count up to three multiplier points per region. Final score is QSO points times multiplier.

Entries should go to G4NBS at 10 Quince Road, The Limes, Hardwick, Cambridge CB3 7XJ.

The 70MHz Fixed contest is on April 3, 0900-1400UTC and this is the same ruling as for the 50MHz event but with radial ring scoring throughout—no 25 pts maximum. Send your entries to G8HHI at 43 Bartons Drive, Yateley, Camberley, Surrey GU17 7DW.

April 9/10, 1400-1400UTC sees the 144MHz and s.w.l. contest which has three sections, S for Single-op, M for Multi-op and L for Listener. Again this uses radial ring scoring and the country/country multiplier scoring idea. Entries for it to G4JLG at 40 Edge Fold Road, Worsley, Manchester M28 4QF.

Note that all times given are in UTC and that Summer Time starts in the UK on March 27.

Moonbounce

Many stations should be able to hear signals off the moon thanks to modern technology. If you take the trouble to install a low-noise masthead pre-amp and are blessed with a reasonably quiet location, single Yagi stations can copy several of the big DX stations on 144MHz.

If you can elevate your antenna system your chances are much better as you will greatly reduce terrestrial man-made noise. If the DX station has a really big array it is possible to make a QSO without exceeding your licensed power.

Dave Dibley G4RGK (BKS) has sent me *Practical Wireless*, April 1988

Annual v.h.f./u.h.f. table
January to December 1988

Station	50MHz		70MHz		144MHz		430MHz		1296MHz		Total Points
	Counties	Countries	Counties	Countries	Counties	Countries	Counties	Countries	Counties	Countries	
G1KDF	3	3	—	—	26	8	6	4	5	3	58
G3FPK	—	—	—	—	46	9	—	—	—	—	55
G4XEN	4	1	—	—	25	7	5	2	—	—	44
GW4FRX	—	—	—	—	36	7	—	—	—	—	43
G11MM	5	4	—	—	7	3	6	1	—	—	26
G8XTJ	—	—	—	—	23	2	—	—	—	—	25
ON1CAK	—	—	—	—	13	5	—	—	—	—	18
G0HDZ	—	—	—	—	15	3	—	—	—	—	18
G0HGA	—	—	—	—	14	3	—	—	—	—	17
ON1CDQ	—	—	—	—	7	6	—	—	—	—	13

some details of the famous huge dish antenna at Arecibo in Puerto Rico, sent to him by KP4I. It is 305m in diameter built in a natural depression formed by collapsed sedimentary limestone. The dish is spherical, not parabolic, the centre of curvature being 265m above the bottom of the dish with the feed located halfway to the centre.

The antenna points along the line from the feed to the centre of curvature. Due to the spherical shape, rays reflected from the dish are focused along the length of the 29m line feed which is basically a tapered waveguide with radiating slots.

The system was used on Oct 17 and 18 last during part of the ARRL Moonbounce Contest. Since it can only be steered up to 20° from the vertical, only two hours per morning could be used.

A 60W solid state p.a. for 432MHz was used, its power fed to the feed platform through 305m of WR2100 waveguide with a loss of only 1dB. For reception a standard cooled GaAsf.e.t. RX was used, the overall noise temperature being about 60K equivalent to a noise figure of 0.82dB.

G4RGK wrote, "They sure were the biggest signal I have heard off the moon on any band". Hardly surprising when you realise that the beam diameter is just ten arcminutes or one-third the angular diameter of the moon.

The 50MHz Band

The important news this month is that French amateurs with Class C, D and E licences may now apply for a permit to operate on 50MHz. This excellent, and quite unexpected, news came from Alain Puillandre F6HRP via Roger Thorn G3CHN (IOW).

The band is 50-51MHz and c.w., s.s.b., RTTY and packet modes are permitted, but there are several limitations. These include only fixed station operation, no operation within a 150km radius of Paris, Lyons, Amiens, Nice, Carcassonne, Besançon, nor anywhere in Corsica, nor within 150km of any Channel 2 TV transmitter.

Even so, 38 departments are unrestricted and two partly affected, of the 95. As for power, 3W e.r.p. is allowed between 150 and 200km from a Ch 2 TX and 10W if the station is more than 200km from such a TX. No antenna polarisation restrictions are mentioned.

F6HRP hopes to be QRV on the band by May and Joseph Cornée F6CTT is also interested. This is a most welcome *volte-face* by the French PTT which had previously seemed to have been very much against any European 50MHz amateur operation.

In his Jan 2 *VHF News*, Hal Lund ZS6PW included a list of 53 South African stations on the band. It gives their telephone numbers and Maidenhead squares such as JF95 and KG41, etc. They have adopted

the 50MHz Worldwide DX band plan and beacon plan. The t.e.p. season is from March to October.

ZS beacons which could be heard in Europe include ZS2SIX in Port Elizabeth (JF25) on 50.005MHz and ZS6DN near Pretoria (KG44) on 50.05 and 50.055MHz both of which are beamed in different directions intermittently.

Back home **Dave Ackrill G0DJA** (WMD) is currently running 3W using a v.m.o.s. p.a. after his *PW* Meon transverter. A valve p.a. is planned for this year and a rotatable beam on the roof is likely to supplement the 30m long wire antenna. Dave hopes to run some packet radio too.

Adrian Gee G11MM (CBE) uses a Spectrum transverter and a 10W Nevada amplifier, the "prime mover" being an Icom IC-271E. His antenna is a 3-ele yagi by M.E.T. 4.6m a.g.l. He has been on the band since last August.

In the aurora on Jan 14, **Bob Nixon G1KDF** (LNH) heard LA80J and GM3WOJ very loud at 2140. Welcome to **Peter O'Dowd G0HLT** (NOT) who has put in his first entry for the annual c.w. ladder and who operates on the band.

Ian Galpin G1SMD (DOR) uses a Yaesu FT-690 transceiver running 2W to a dipole. He plans to have a 40W p.a. soon and a 3-ele Yagi.

The 144MHz Band

Johan Van De Velde's ON1CAK letter was received in mid-January and he reports about the good tropo opening to Southern France and Spain in the Dec 20-23 period last year. He worked stations in AD, AE, XD, ZD and ZE squares. There were some Italians on from EE and EF but Johan missed them.

He did not find much activity in the Ar on Jan 2 but did work three GMs on s.s.b. GM, LA, SM4/5 and OH were heard on c.w. but his licence does not permit c.w. mode. He is looking for WR, WQ, XQ, XS and YS squares. GM8DFX is on s.s.b. from XS square, according to **John Eden GMOEXN** (HLD). Johan included a table entry from his brother ON1CDQ.

Another new Belgian contributor is **Guy Espreux ON5DG** (CK38c) from Boncelles. His list referred to the Nov 3-8 period last year already well reported. Guy has several transceivers and runs 100W on the band using a 17-ele Yagi antenna 16m a.g.l. His QTH is 240m a.s.l.

G0DJA's letter reviewed Dave's activity in 1987 in which he finally made c.w. contacts with 123 different stations. 14 per cent were made at 25W the rest at 2.5W. Best DX were OK2TU and OK1DEF. He uses packet radio a little too.

G0HLT asked if c.w. QSOs with B licensees count for the ladder which of course they do. There is no need, Peter, to list all the different stations but it makes for more interest if unusual contacts are mentioned and the longer DX worked.

G11MM uses an Icom IC-271E at 25W

Annual c.w. ladder

Station	Band (MHz)				Points
	50	70	144	430	
G0HGA	—	—	75	—	75
G0HLT	1	—	31	—	32
G4OUT	—	—	19	—	19
G3FPK	—	—	8	—	8
GU4HUY	—	—	3	—	3

Number of different stations worked since January 1.

with a Jaybeam 8-ele Yagi at 6m a.g.l. By the way Adrian, you count your own country in the total so I have amended your figures. His best DX in 1987 was probably OY9JD.

G1KDF caught the Ar on Jan 2 and operated at 1700-1730. Bob worked GM8FFX (GRN), GM6RGN (SLD) on ZU square and GM0HBK (HLD) in XR. He heard GM4ZET (SLD) and GM0FET (WIL) too.

In the Jan 14/15 Ar, which was a very extensive event, he worked GM8YMK (OKE) in YT for a new square, GM8COX (SCD), GM0DRU (WIL) in WS, GM6RGN, GM8MJV (LTH), G1DXI (HBS) and G16ATZ (ATM). Others heard included GM0HQG (OKE) and LA8OW. Bob was QRV from 1815 to 0050.

G1SMD uses a Yaesu FT-290 with 10W amplifier and a 6-ele quad antenna, 7m a.g.l. Ian's QTH is only 7m a.s.l. surrounded by hills. He lists some useful DX in the Dec 20-23 tropo opening.

Ian Cornes G4OUT (SFD) remarks on the poor tropo during January and has worked 19 stations on c.w. up to the 24th. He is having drift problems again with his IC-271E and hopes the dealer will have cured these in time for the contest on Feb 7. Failing this, he will use his FT-290R.

G4RGK spoke to some Scandinavian v.h.f. operators on the 144MHz v.h.f. net after the Jan 2 Ar. It seems that the SMs had worked very long distances to UA9FAD and other UA9s. QRBs of over 2000km.

Dave operated in the Quadrantids meteor shower with much success. He suggests the shower peaked early on Jan 4 this year. Over the past seven years he has recorded details of all his contacts, which coupled with a computer program has proved invaluable in enabling the optimum time for a schedule to be arranged.

G4RGK completed QSOs with SM3PXO (GX), IW1AZJ (DF), IW2BZY (EF), UT5DL (LI), SM3BIU (HX), LA1TV (ET) and HG7WJ/5 who was only using 50W to a 9-ele Yagi.

G4SSO (LDN) is quite pleased with his achievements in 1987 which brought Alan 34 new squares making his current total 193. He operates on m.s. and in the December Geminids completed with EA6FB (AY) for a new square and country. His station comprises a Yaesu FT-225RD with MuTek pre-amp, a p.a. with two 4CX250Bs and a 15-ele Cue-Dee Yagi which seems not to suffer from rain static. The antenna is supported on a 13.7m Altron mast and the feeder is the low loss LDF4-50.

G4XEN (NHM) completed a couple of random c.w. m.s. QSOs in the Geminids. These were F8OP (CF) on Dec 13 and SM4HFI (HU) on the 14th. On Jan 3 in the Quadrantids John's only QSO was with UT5DL, LI being a new square.

Arthur Hough G4YTR (YSS) is another reader whose last letter was delayed. He ended the year with 111 stations in the c.w. ladder and accumulated a few new

countries and squares in the late-1987 lifts. His station consists of an Icom IC-251E, Belcom LA-106 amplifier and 14-ele Yagi by M.E.T. 11.6m a.g.l. his QTH being only 6.7m a.s.l.

G8LHT added 15 new squares in the late-1987 lifts and is now up to 99 on the band. Two new countries for Ian were SP and Y and he ended last year with 24 worked. He has made a new amplifier and plans to convert the old one for 70MHz.

G8PYP (DOR) comments on the December 19-23 tropo opening and reckons the conditions were at their best in the early afternoon of the 23rd. Steve concludes that some good quality DX was available but lacking in quantity. Two new squares were AE and DJ in France.

G8XTJ has found things rather quiet in January, having missed all the auroras. He has been gradually working towards his Diamond Award in the WAB programme and needed 37 areas to complete the 1500 required.

Irwin Brown G11JUS (ATM) reports a couple of completed m.s. QSOs in the Quadrantids. These were s.s.b. ones with DL3AAL (FM) which went through in 26 minutes, and Y23NL (GL) completed in 32 mins. Apart from that, tropo conditions in GI have been as mediocre as everywhere else in the British Isles.

Finally to the far north of the mainland and John Eden GM0EXN (HLD). Auroras are frequent at his latitude so his several letters cover recent events.

Starting on Dec 21, 1210-1530, he worked 27 stations on c.w. and s.s.b. in D, G, LA, OZ, PA, OH and SM. The most easterly and northerly station was OH3EX (KV), the most southerly G6GN (AVN) and the furthest to the SE, Y23SB (FN). QTE was 30-40° for this event.

On Jan 2 the Ar lasted from 1200-2000 and 15 stations were worked on c.w. in the first 3½ hours in LA and SM. The most northerly was SM3AZV (IX) and all were best at 30-40° again.

In his second period of operating John's best DX was OH5LK (NU) and DK0TV (GM) in Berlin. This session brought D, LA, OZ, SM and Ys as well plus assorted EI, G and GI contacts at QTE 300°. Nothing to the east was heard in the last 40 mins of this phase. The band was full of c.w. signals right up to 144.150MHz.

Now the event on Jan 14 which probably started at 1600 John thinks. The SMs were weak throughout but the German stations were up to S8 at times. No OH or Russian stations were heard and beam headings were from 280°, through north to 45° and beacons heard were DLOPR, Y41B, GB3LER, GB3VHF and SK4MPI. 18 c.w. and two s.s.b. QSOs were made up to 2300 when John closed down.

On Jan 18, John reports a visual aurora as a high white arc curling around the Arctic, fuzzy but clearly visible. Seven stations were worked on c.w., mainly at QTE 25-30° for LA and SM but DK1KO (FN) was at 60°.

GM0EXN also included details of John Lincoln's GM8DFX (XS) Ar activities. This is a renewed call and 'DFX' can be contacted via 'EXN' for the time being. He was in on the Jan 2 event working G, GI and GM stations on s.s.b.

**March 26, April 26
and June 1 are
the next three
deadlines**

QTH Locator Squares Table

Station	Band (MHz)			Total
	1296	430	144	
G3IMV	35	119	405	559
G4KUX	—	80	345	425
G8GXP	45	151	331	527
G4DHF	—	—	307	307
G4SWX	—	—	293	293
I4YNO	—	—	270	270
G4RGK	38	106	260	404
GJ4ICD	59	119	253	431
G4XEN	—	106	251	357
G4DEZ	44	38	246	328
G1EFZ	32	93	237	362
G8XVJ	18	88	236	342
G3UVR	75	125	224	424
G3FPK	—	—	224	224
G4IGO	—	—	223	223
G4SFY	—	—	222	222
G6XVV	25	64	211	300
G4MEJ	—	—	211	211
G8LFB	—	—	202	202
G4SSO	—	78	193	271
G4TIF	—	107	187	294
G3CQJ	44	102	186	332
G3XDY	81	137	185	403
G4MJC	—	33	184	217
GM4CXP	—	31	184	215
G6DER	76	110	183	369
G0DAZ	—	91	183	274
G4XEK	—	—	178	178
G6HKM	26	101	177	304
G4YUZ	—	—	177	177
G3JXN	82	129	175	386
G4DOL	—	—	172	172
G1EGC	—	74	171	245
ON1CAK	—	—	167	167
G1GEY	—	68	158	226
G4YCD	—	36	155	191
G3NAQ	—	75	154	229
G6DZH	—	87	149	236
G1JUS	—	—	149	149
G8HHI	31	106	148	285
G1KDF	32	91	148	271
G4MUT	28	90	145	263
GW4FRX	—	—	144	144
HB9AOF	55	80	141	276
G6MGL	59	89	138	286
G8ATK	42	89	138	269
G8MKD	—	49	137	186
E15FK	—	35	137	172
GM0BPY	—	57	129	186
G8ZDS	—	43	129	172
G8PNN	62	97	128	287
G6YLO	32	104	128	264
G1LSB	—	126	125	251
G6STI	21	58	124	203
G4TGK	—	—	118	118
G8XTJ	—	—	107	107
G4AGQ	1	41	103	145
GW6VZW	—	6	103	109
G4NBS	59	103	102	264
GW8VHI	—	48	102	150
G4CQM	—	52	100	152
G8LHT	2	58	99	159
G6AJE	5	57	95	157
G1IMM	—	11	91	102
G4FRE	63	136	84	283
GI4OWA	—	—	78	78
G1SMD	—	—	77	77
G4FVK	20	46	75	141
G0FEH	—	2	70	72
G6MXL	10	36	66	112
G1CRH	—	—	62	62
G0HOD	—	—	61	61
PA3EUS	—	18	57	75
GM0GDL	—	17	54	71
GU4HUY	—	—	54	54
G1DOX	28	34	53	115
G8PYP	—	2	52	54
G1NVB	—	—	49	49
G4ZTR	29	29	37	95
G1VTR	—	23	32	55
G2DHY	1	4	30	35

Starting date January 1 1975. No Satellite or repeater QSOs. "Band of the month" 144MHz.

ICOM

PICK THE POCKET PACKET MOBILE THAT WON'T COST YOU A PACKET

TO CLEAR



We are clearing our remaining stock of IC-47E mobiles at the giveaway price of £250 inc. VAT!!! The incredibly small 47E is ideal for PACKET working and has 25 watts output power, 9 memories storing receive frequency, transmit offset and offset direction. The 47E's scanning system scans memories or band in use, hand mic has 1750Hz tone burst. Don't miss this unique opportunity to own one of these remarkable little mobiles.



Icom (UK) Ltd.

Dept. PW4. FREEPOST, Herne Bay, Kent CT6 8BR. Tel: 0227 363859. Telex: 965179 ICOM G.

Contact us for the location of your nearest ICOM dealer. Barclaycard and Access welcome.

J. BIRKETT

RADIO COMPONENT SUPPLIERS

200 ASSORTED MINIATURE POLYESTER CAPACITORS for £1.00.
ITT CRYSTAL FILTER 10.7MHz BW 3.75KHz Type 014DG @ £3.95.
SIDE BAND CRYSTAL FILTERS Upper and Lower 1.4MHz BW 2.4KHz @ £11.95 pair.
ITT CRYSTAL FILTER 024CD 10.7MHz BW 6KHz @ £5.00.
VHF-UHF CO-AX AERIAL CHANGE OVER RELAY 24 volt Coil @ £10.00.
X BAND GUNN DIODES @ £1.65, X BAND DIODES LIKE 1N23 @ 45p, SIM2 @ 45p.
2GHz STRIPLINE TRANSISTORS Similar To BFR91 Untested @ 6 for £1.15.
5GHz STRIPLINE TRANSISTORS Untested @ 6 for £1.65.
50 ASSORTED Vari-Cap DIODES @ 60p, 100p.f. @ 5 for 50p, 300p.f. @ 5 for 60p.
EX-MILITARY COMMUNICATIONS RECEIVER Type R210, Covering 2 to 16MHz in 7 Switched Bands, for receiving CW, SSB, AM with CW Filter, BFO, Noise Limiter, Aerial Inputs, 80ohm Balanced Line, Long Wire or Whip, Aerial Complete with Loudspeaker, Pair of miniature Headphones and 240 volt AC Power Pack, Price £79.80, Carr. £8.00.
C804 type AIR SPACED VARIABLE CAPACITORS Sp.f. @ £1.95, 10p.f. @ £1.95, 15p.f. @ £2.50, 25p.f. @ £2.50, 50p.f. @ £2.50, 150p.f. @ £2.95.
HIGH VOLTAGE SILVER MICA CAPACITORS 750vwr 10, 18, 27, 82, 120, 270, 330, 500p.f. All @ 20p each.
RECEIVER AERIAL TUNING UNIT 1 to 30MHz In case @ £23.60 p.p. £1.50.
VHF MONITOR RECEIVER KIT covering approx 120 to 150MHz, suitable for monitoring Aircraft, Amateurs on 2m Ect. Consisting of VHF Module, IF Module, AF AMP, Loudspeaker, Telescopic Aerial Ect, No cabinet or knobs @ £15.95 p.p. £1.00.
WOOD AND DOUGLAS KITS AND C.M.HOWES KITS AVAILABLE BY POST AND FOR CALLERS. ACCESS AND BARCLAY CARDS ACCEPTED, P.P. 60p UNDER £5. OVER FREE.

25 The Strait
Lincoln, Tel. 20767
(LN2 1JF)
Partners J.H.Birkett.
J.L.Birkett.

RST

MAIL ORDER CO.
Langrex Supplies Ltd.,
Climax House,
159 Fallsbrook Road,
Streatham, SW16 6ED.

SPECIAL EXPRESS MAIL ORDER SERVICE

AZ31 2.75	EM81 2.50	PL519 6.00	6AK5 5.99	6KD6 8.00
CL33 4.00	EM87 2.50	PL802 6.00	6AL5 1.50	6L6G 5.00
DY867 1.50	EN91 6.50	PY33 2.50	6AM6 6.02	6L6GC 5.75
DY802 1.50	EY51 2.75	PY81 1.50	6AN5 4.75	6L7 2.50
E88CC 10.33	EY86 1.75	PY82 1.50	6AN8A 3.50	6LQ6 7.50
E180F 12.05	EY88 1.75	PY83 1.25	6AQ5 3.25	6Q7 3.75
E810F 35.48	EY500A 3.00	PY88 2.00	6AR5 25.00	6RHH/86KN8 10.00
EABC80 1.25	EZ80 1.50	PY800 1.50	6AS6 8.66	6SA7 3.00
EB91 1.50	EZ81 1.50	PY500A 4.00	6AS7G 8.75	6SC7 2.75
EBF80 1.50	GY501 3.00	PY801 1.50	6AT6 1.25	6SG7M 2.50
EBF89 1.50	GZ32 4.00	QOV02-6 38.00	6AUSGT 5.00	6SJ7 3.25
EC91 8.00	GZ33 4.75	QOV03-10 26.25	6AU6 2.50	6SK7 3.50
ECC33 4.50	GZ34 5.00	QOV03-20A 48.38	6AW8A 3.75	6SL7GT 3.00
ECC35 4.50	GZ37 4.75	QOV06-40A 46.00	6B7 3.25	6SN7GT 3.00
EC81 1.75	KT61 5.00	6BA7 5.00	6BA6 1.50	6SS7 2.75
EC82 1.75	KT66 15.00	6BE6 1.50	6B8 3.25	6T6 2.25
EC83 1.75	KT77 Gold Lion 12.00	6BE6 1.50	6BV6GT 4.25	6X4 3.00
EC85 1.75	KT88 15.00	6BH6 2.50	6X5GT 1.75	6X7 1.75
EC88 3.50	N78 15.00	6BJ6 2.25	6X8 2.00	6X8A 2.50
EC91 8.93	OA2 3.25	6BN6 2.00	6X8A 2.50	6X8B 2.50
ECF80 1.50	OB2 4.35	6BQ7A 3.50	6X8C 2.50	6X8D 2.50
ECF85 3.50	OC3 2.50	6BR7 6.00	6X8E 2.50	6X8F 2.50
ECH42 3.50	OD3 2.50	6BR8A 3.50	6X8G 2.50	6X8H 2.50
ECH81 3.00	PC86 2.50	6BS7 6.00	6X8I 2.50	6X8J 2.50
ECL80 1.50	PC88 2.50	6BW6 6.00	6X8K 2.50	6X8L 2.50
ECL82 1.50	PC92 1.75	6BW7 1.50	6X8M 2.50	6X8N 2.50
ECL83 3.00	PC97 1.75	6BZ6 2.75	6X8O 2.50	6X8P 2.50
ECL86 1.75	PC980 1.75	6C4 1.25	6X8Q 2.50	6X8R 2.50
EF37A 5.00	PCF80 2.00	6C6 3.50	6X8S 2.50	6X8T 2.50
EF39 2.75	PCF82 1.50	6C6A 2.50	6X8U 2.50	6X8V 2.50
EF41 3.50	PCF86 2.50	6C6B 2.50	6X8W 2.50	6X8X 2.50
EF42 4.50	PCF88 2.50	6C6C 2.50	6X8Y 2.50	6X8Z 2.50
EF50 2.50	PCF801 2.50	6C6D 2.50	6X8A 2.50	6X8B 2.50
EF54 2.50	PCF802 2.50	6C6E 2.50	6X8C 2.50	6X8D 2.50
EF55 3.50	PCF805 1.70	6C6F 2.50	6X8E 2.50	6X8F 2.50
EF80 1.75	PCF808 1.70	6C6G 2.50	6X8G 2.50	6X8H 2.50
EF86 5.00	PCF8200 3.00	6C6H 2.50	6X8I 2.50	6X8J 2.50
EF91 2.95	PCL82 2.00	6C6I 2.50	6X8K 2.50	6X8L 2.50
EF92 6.37	PCL83 3.00	6C6J 2.50	6X8M 2.50	6X8N 2.50
EF183 2.00	PCL84 2.00	6C6K 2.50	6X8O 2.50	6X8P 2.50
EF184 2.00	PCL85 2.50	6C6L 2.50	6X8Q 2.50	6X8R 2.50
EH90 1.75	PCL86 2.50	6C6M 2.50	6X8S 2.50	6X8T 2.50
EL32 2.50	PCL805 2.50	6C6N 2.50	6X8U 2.50	6X8V 2.50
EL33 5.00	PD500 6.00	6C6O 2.50	6X8W 2.50	6X8X 2.50
EL34 5.00	PFL200 2.50	6C6P 2.50	6X8Y 2.50	6X8Z 2.50
EL36 2.50	PL36 2.50	6C6Q 2.50	6X8A 2.50	6X8B 2.50
ELL90 25.00	PL81 1.75	6C6R 2.50	6X8C 2.50	6X8D 2.50
EL81 5.25	PL82 1.50	6C6S 2.50	6X8E 2.50	6X8F 2.50
EL84 2.25	PL83 2.50	6C6T 2.50	6X8G 2.50	6X8H 2.50
EL86 2.75	PL84 2.00	6C6U 2.50	6X8I 2.50	6X8J 2.50
EL91 7.39	PL504 2.50	6C6V 2.50	6X8K 2.50	6X8L 2.50
EL95 2.00	PL508 5.50	6C6W 2.50	6X8M 2.50	6X8N 2.50
EL360 18.50	PL509 6.00	6C6X 2.50	6X8O 2.50	6X8P 2.50

Open daily to callers: Mon-Fri 9 a.m.-5 p.m.
Valves, Tubes and Transistors - Closed Saturday
Terms C.W.O. only, allow 7 days for delivery. Tel. 01-677 2424/7.
Prices excluding VAT add 15%
Post and packing £1.00 per order
Telex 946708
Prices correct when going to press

DATA COM THE SCANNER SPECIALISTS

Sutton Datacom Limited
46 Weston Park Road
Peverell Plymouth Devon
PL3 4NW
Tel Plymouth (0752) 674435

4 NEW SCANNERS NEW FROM UNIDEN

HANDHELD 50 XL
10 Bands
Prog LCD Display
SCANS 15
Channels Per Second
29-54
136-174
406-512
MHz
£99.99

HANDHELD 100 XL
16 Channels, 9 Bands
AM/FM
Air Band
66-88
118-174
406-512
MHz
£189.99

MORE SCANNING POWER FOR YOUR £

HANDHELD 70 XLT
10 Bands
20 Channels
Key Pad
Programmable
Channel Lockout
Priority Monitor
29-54
136-174
406-512
MHz
£199.99

DESKTOP 175 XL
16 Channels, 11 Bands, AM/FM
Air Band
66-88
118-174
406-512
MHz
£179.99

ALL PRICES INC VAT & DELIVERY ON UK MAINLAND
PHONE FOR ACTION PLYMOUTH (0752) 674435

On the 14th **GM8DFX** operated for an hour from 1800 and worked 14 stations, mostly Gs, but also **GW4FRX**, **GI4OWA**, **GM8COX**, **GM1GGP** and **GM0EXW**. John used 40W and a 6-ele Yagi beaming 35°.

The 430MHz Band

New contributor **ON5DG** operates on 430MHz. He uses a Yaesu transverter and Icom IC-745 transceiver with 60W to a pair of 21-ele Yagis. Guy listed many QSOs over 600km made way back in the early-November tropo lift.

G1IMM uses his Icom IC-271E and a Microwave Modules transverter and started on the band in mid-December. Adrian's antenna is a 19-ele Yagi from the Tonna stable 6.1m a.g.l. So far he has worked eleven squares.

G1KDF is still looking to make his first AR QSO on 430MHz. It seems that unless there is a very intense event, everyone operates only on v.h.f.

G4SSO reports that 1987 produced another 26 squares. Alan was particularly pleased to work **SP6GZZ** on Nov 5, his best DX so far. He is finding QSLs from Gs just as difficult to acquire as those from overseas stations. He has sent three cards to one Cumbrian operator without response.

His station consists of a Yaesu FT-980 transceiver driving an FTV-107 transverter with a Tokyo 50W amplifier. At present Alan has a single HAG 22-ele Yagi on the Altron wind-up mast but plans to add another soon. As for 144MHz, he uses LDF4-50 coaxial feeder.

G4XEN reckons his only recent noteworthy QSOs were on Dec 22 with **F1EZQ** (CH) and on the 23rd with **DF9CY** (EL). QSLs for 144 and 432MHz from **F1EZQ** were incorrectly made out to **G4EXN** and both for 432MHz as well. John first worked CH square in 1982 and is wondering if he will ever get it properly confirmed.

One of **G8LHT**'s plans for 1988 is to install a masthead pre-amp for the band. In 1987 Ian added 22 more squares and four new countries—OE, OK, SP and Y. His best DX on the band was **SP9FG** (JJ70b) at 1536km.

G8PYP has added a 430-440MHz transverter module to his Yaesu FT-726 so is now QRV on the band. So far he has only contacted a few local stations in two squares.

The Microwave Bands

In reviewing his microwave activity in 1987, **G0DJA** concludes it was "A bit of a poor year..." Just a few QSOs on 10GHz and little on 24GHz, mainly because he could not get out -/P very often. Dave reminds me that in the winter, the first Sunday each month is microwave activity day.

John Tye G4BYV (NOR) operated on 5.7GHz on Dec 23 and worked **DC0DA**

(DL38e) for his best DX so far of 464km. He and Simon Freeman **G3LQR** were also heard by **DF7VX** (EL) but they could not find the German station. During this December lift John reports good conditions on 1.3 and 2.3GHz with German, Dutch and English stations in the south east working into ZD, ZE and ZF squares.

Keith Hewitt G6DER (YSS) made four contacts on 3.4GHz on Dec 23; **PAORDY**, **PAOEZ** and **PE1ALA** all in CM square and **DF7VX**. If he can find a suitable coaxial relay at a sensible price he would like to mount the whole lot behind the dish. He reckons 400mW should be quite effective. Keith is now using two r.f. stages on receive, an **MGF1402** followed by an **MGF1202**.

Meteor Shower Data

The next major shower is the Lyrids, the earth passing through the stream between April 19 and 25. The peak is usually reckoned to be the 22nd. The Right Ascension is 272° and the Declination +33° and the radiant is below the horizon between about 1400 and 1830UTC as far as British Isles stations are concerned.

Best times for skeds would be; **NE-SW** around 0200 and 0900, worst time 0530. **E-W** around 0430 with 1100 and 2100 as possible times, avoid 0030 and 0830. **NW-SE** around 0700 and 2300 but avoid 0300. **N-S** should be quite effective around 0000 and 0800 but avoid 0430.

These data were produced by my Sinclair ZX-81 programs which are based on **DL5MCG**'s ideas as previously noted. The great circle bearing is also printed for the station you want to work, as is the antenna elevation for optimum efficiency and the distance.

Antenna Notes

In the previous paragraph I mentioned antenna elevation in connection with m.s. communication. Meteoric dust ionises in the E-layer of the ionosphere at about 100km altitude. Sporadic-E communication is also effected at this height. Some simple geometry will show that at a distance between stations of less than about 2200km there is merit in using some antenna elevation for m.s. and Es QSOs.

In round figures, over a distance of about 100km an elevation of 10° would be useful. For average m.s. skeds in the range 1000 to 1600km 6° of elevation would be appropriate.

Some operators without elevation rotators have adopted a permanent elevation of a few degrees. As far as line-of-sight paths are concerned, there would be no noticeable difference from a truly horizontal beam.

I use about 2-3° fixed elevation at **G3FPK** on 144MHz. This angle is that to my nearest local obstruction and it does not seem to adversely affect the tropo perfor-

mance of the station in unobstructed directions. A few readers in poor locations have mentioned that they use permanent elevation. This is a useful ruse if you are an occasional satellite user and do not wish to buy an expensive extra rotator.

CW on 144MHz

G4SSO is one of an increasing number of s.s.b. users on 144MHz who are concerned at the amount of c.w. activity in the 144.15-144.50MHz section. He says it is quite commonplace to hear two A licensees on 144.225MHz for example, carrying on a c.w. QSO, then holding an inquest.

I would add that I was astonished to read in the January issue of *Radio Communication*, page 46, that the RSGB v.h.f. Committee agreed that slow Morse should take place on 144.250MHz.

I believe there are "official" broadcasts most weekday mornings. On Sunday mornings I can hear a couple of **GB2RS** news stations from other regions and a London slow Morse teach-in on '250. What a mess!

144.250MHz is the last place for either news or slow Morse broadcasts. Surely everyone appreciates that the section 144.15 to 144.40MHz carries most of the DX traffic during tropo and Es openings. Are DX fans supposed to refrain from replying to an LZ or SV station who appears on or near '250?

Nobody wishes to discourage B licensees from practising sending and receiving Morse on the air. However surely a more appropriate part of the band would be between 144.45 and 144.50MHz? This would be well out of the way of any DX and contest activity and should afford the net members a QRM-free part of the band.

Somewhat tongue-in-cheek, **G4SSO** writes, "Heaven knows what will happen to DX-peditions in the future. Perhaps they will need dispensation to operate s.s.b. below '150 where there is little c.w. activity any more."

I sincerely hope that the RSGB VHF Committee will reconsider this inappropriate decision and bear in mind the original concept that the bottom one megahertz of the 144MHz band was for non-channelised, non-net DX communication and the top half was for local, channelised f.m. mode operation.

Your views on this topic would be welcomed so that a considered argument can be put to the afore-mentioned committee.

Record Keeping

Many readers now keep all sorts of amateur radio records on computer. **G6DER** received a couple of **G4HLX** programs as a Christmas present and is very impressed with them. The first one is called **SQUIF** which he says is a squares collecting program. The other is called **SPOT** and is a distance and logging effort.

RTTY

RTTY and AMTOR

Ian Baxter has written with details of his s.w.l. station which comprises a Yaesu FRG-7700 receiver, 20m long wire antenna and ZX Spectrum computer running the **RX-4** program from Technical Software. Ian's station seems to be working very well with the best recent DX being **9N7YDY** (Nepal).

For those of you on 10MHz two items of interest. First I have news of a new mailbox which will be operating on 10.140/10.145MHz using the call **W8YFE**. Reports on this mailbox will be very welcome.

I recently monitored a very interesting **AMTOR** QSO on 10MHz between **HB9BJ** (Switzerland) and **9K2EC** (Kuwait). The antenna in use at **9K2EC** comprised a 17

element log-periodic for h.f.! Now that must be quite a sight, enough to give the local planners a heart attack!

Another reader, **Dave Speechley G4UVJ** has sent me his station details via my Prestel mailbox. Dave operates mainly data modes including **AMTOR**, **Packet**, **RTTY** and **ASCII**. The computer and interface used comprises a Tandy 100 portable computer and the popular **PK-232** terminal

Reports to Mike Richards G4WNC
200 Christchurch Road, Ringwood, Hants BH24 3AS.

unit. For h.f. Dave uses a Yaesu FT-757 transceiver driving either an Altron AQ6 minibeam or an HF-5 vertical. When working on v.h.f. the FT-757 is used in conjunction with a FTV-901 transverter equipped with 50 and 144MHz modules. Dave's best recent DX was VK7AE (Tasmania) under apparently flat band conditions. Like many other amateurs, Dave reports that results using higher speed ASCII are often better than that obtained with RTTY. For my thoughts on this subject see my comments on ASCII vs RTTY elsewhere in this column.

A welcome return this month for **John Barber G4SKA**. John has been busy moving to a new QTH, so has had very little time for radio. The current project is to rebuild his home-brew terminal unit from its birds nest form onto a proper p.c.b. Hopefully he will be back on the air, at least with a temporary antenna system, by the time this is published.

FAX

How is the FAX activity night going? So far I have received plenty of encouragement but no actual reports. Would you like to see it extended to h.f. or have you any other suggestions?

For h.f. fans the best time to monitor still seems to be Sunday mornings where there are always German stations to be heard using 120 r.p.m. and an IOC of 288. Once again all reports for this fascinating mode are very welcome.

ASCII vs RTTY

Regular readers may recall that I mentioned the growing use of ASCII and higher baud rates in an earlier issue. In that issue I made reference to a QSO between HB9KU and OH2LU. Well, I received a QSL card for that contact the other day! The QSL card was accompanied by a very interesting letter from **Dr Luigi Valpiana HB9KU**. Luigi was asking the question why does 75 or 110 baud ASCII often seem to produce better copy than 45 baud RTTY? At first sight this seems to be a contradiction of accepted theory. When comparing two signals over the same quality path then conventional theory would expect that the signal using the lower baud rate will have the lower error rate. When comparing 45 baud RTTY to 100 baud ASCII however, the opposite sometimes appears to be true! Not being one to ignore established theory I set about finding a solution to this phenomenon.

I believe the answer lies in the code used rather than the transmission rate. When using RTTY the International Telegraph Alphabet No. 2 (ITA No. 2) is employed to convert the typed character into a 5-bit code for transmission. It doesn't take too much maths to realise that a 5-bit code with only 31 combinations cannot, on its own, handle 26 alphabetic characters, figures and punctuation. The trick used with the ITA No. 2 is to incorporate shift characters so that each transmitted 5-bit code has two possible meanings, the two shifts are known as letters and figures.

When a RTTY signal using ITA No. 2 is subject to interference one common result is that either a shift character is lost or an extra shift inserted. If this does happen then all the following characters will be printed incorrectly until another shift is received. From this description it can be seen that a single error in RTTY can result in a large amount of corrupted information.

When considering the performance of

an ASCII transmission the situation is rather different as a 7-bit code is used giving 127 possible combinations. This means that a full range of alpha-numeric characters can be sent without resorting to the use of shift characters. Again, when considering an ASCII signal which is subject to interference, only the character that is directly affected by the interference will be corrupted.

From this analysis it can be seen that with a single character error RTTY can give more overall corruption on a link than an ASCII signal.

I think this explains the reason for the phenomenon observed by Luigi, but what solutions are there? Well, one solution used by some commercial stations is to abandon the shift characters altogether and spell out all the numbers and punctuation i.e. one, two, stop. Another partial solution which is incorporated in many RTTY programs is unshift-on-space. This forces a return to letter shift after receiving a space character and helps to minimise the number of corrupt characters.

If any of you have any alternative theories or solutions then please drop me a line.

Contests

The next main RTTY contest is the BARTG Spring v.h.f./u.h.f. event. This popular and friendly event takes place on the weekend of the 16/17 April and is open to all amateurs in Zones 14 and 15. The contest details are as follows:

Duration: 1800UTC 16 April to 1200UTC 17 April. A 4 hour rest period must be taken during this period.

Bands: 144MHz, 432MHz and 1296MHz. Repeater or satellite contacts not allowed.

Operators: Any licensed amateurs within Zones 14 and 15. Portable operation is allowed from one location or within 1km of that location for the whole of the contest. Contest logs from s.w.l.s very welcome.

Contacts: Stations may not be contacted more than once on any one band during the period of the contest.

Messages: a) Start time of contact in UTC using full four digit group, i.e. 0830.

b) RST report, three figure group.

c) Message serial number starting with 001.

d) Locator, which can be either Maidenhead locator, town or bearing from a town.

Logs: Separate A4 size log for each band, preferably BARTG. The log to contain: date, time, RST, message number, locator/QTH, estimated distance and points claimed.

Scoring: As per table for 144 and 432MHz. For 1296MHz contacts score 1 per km.

0-50km = 1 point

50-100km = 3 points

100-150km = 5 points

150-200km = 7 points

200-250km = 9 points

250-300km = 11 points

Pro-rata on 50km increments.

Awards: Certificates will be awarded to the top scorers and runners up in each section for each band.

1) Single operator stations.

2) Multiple operator stations.

3) Short wave listeners.

All logs to BARTG contest manager (1) postmarked no later than 21 May 1988.

RS232 and the Dragon 32

Jim Fuller has written to me with some good news for owners of this popular computer. Jim has been involved writing

Prefix (Country)	Band (MHz)				
	3-5	7	10	14	21
A,K,W (USA)				APR	PR
A22 (Botswana)				R	
CT (Portugal)				P	
DA,F,J,K,L					
(W. Germany)		AR	R	APR	R
EA,C (Spain)			A	APR	
EA8 (Canary Is.)					R
EL (Liberia)					R
F (France)				PR	P
G (England)	APR	R		APR	R
GI (N. Ireland)	R	R		R	
GM (Scotland)	R				
GW (Wales)	R	R		P	
HA (Hungary)				PR	
HB (Switzerland)			A		
HK (Colombia)					P
I (Italy)				APR	PR
LA (Norway)				APR	
LX (Luxembourg)				P	
OE (Austria)				PR	
OH (Finland)				PR	R
OK (Czechoslovakia)				R	
ON (Belgium)				R	
OZ (Denmark)				R	
PA (Netherlands)				PR	
SG,K,L,M (Sweden)				APR	
SO,P (Poland)				R	
SV (Greece)					R
SV5 (Rhodes)				R	
TA (Turkey)					R
T77 (San Marino)					R
UA,V (USSR)				R	
UT (Ukraine)				R	
VE (Canada)				R	PR
VK (Australia)					R
XE (Mexico)					P
YO (Romania)				R	
YU (Yugoslavia)				R	
Y (E. Germany)			R	AR	
ZS (South Africa)				R	
9K2 (Kuwait)			A		
905 (Zaire)					R

Data communications table showing countries heard/worked during January

communications software for Dragon 64 computer but is often asked if the software will run on a 32K machine. Unfortunately the answer has usually been no, due to the lack of a suitable RS-232 interface for the Dragon 32.

Jim has now produced his own solution to this problem by designing an interface for this computer. The interface actually fits inside the computer leaving the expansion port free for other things which is a useful point. The fitting of the interface is quite complicated, so Jim has enlisted the help of his partner Chris Foster G4USU to provide a fitting service. The price is a very reasonable £29.98 including fitting but excluding post and packing. The use of this interface should enable Dragon 32 owners to take advantage of conventional packet radio TNCs and modems etc.

For further information please contact Jim Fuller (2) or Chris Foster (3).

That's all for this month but please keep those reports and comments coming either by post or via my **Prestel mailbox (425470071)**.

(1) BARTG Contest Manager, Peter Adams G6LZB, 464 Whippendale Road, Watford, Herts, WD1 7PT.

(2) Jim Fuller G4WPI, 42 Kitchener Road, Amesbury, Wilts, SP4 7AD.

(3) Chris Foster G4USU, 2 The Row, Berwick St James, Nr Salisbury, Wilts, SP3 4TP.

OSCAR—10

The A-O-10 satellite, despite the limitations imposed by the "mono" antenna, has been behaving impeccably. Many thousands of international contacts have been effected during the periods of transponder permitted use either side of eclipse. Sadly, from February 14, it was again necessary to curtail all use of the transponder as the sun-angle to the solar panels from then on was so offset as to provide less than 50 per cent of the power required by the satellite to sustain operations.

This current state of power insufficiency will exist for the next two months, so we cannot expect to be able to use OSCAR-10 until at least the end of April, and possibly not until the second week of May. The exact date, determined after continuous and careful observation by the command stations, will be announced on the various AMSAT nets, so users are asked to carefully observe the limitations of zero use now, followed by low power employment only when it returns.

Quite apart from the problems of long duration eclipses at Apogee, incorrect antenna pointing coupled with bad sun angles to the solar cells, all of which were directly due to the insertion of OSCAR-10 into the incorrect inclination, the reason for its demise by the loss of the IHU memory brought about by intense radiation can be seen in Fig. 1. This is a "QL" computer derived high resolution plot of the Van Allen radiation belts around our earth, sent in by **John Branegan GM4IHJ**.

John states, "you can see the whole sad story of OSCAR-10 here. Had it been at sixty degrees inclination it would have skimmed the polar edge of the belts, and even its perigee at 60.5 degrees would have given relatively mild exposure. In fact, its 25 degree inclination put it right in the worst possible situation. When its perigee was over the equator, it was in the thickest part of the inner belt, shown by the shaded areas".

Although initially to be placed in a transfer orbit of low inclination, the kick motor firings of the coming OSCAR-13 is planned to boost the satellite to an inclination of at least 58 degrees, and a perigee of some 1500km, which will avoid this problem. To add a belt as well as braces, specially radiation hardened i.c.s will be employed, with additional shielding.

A CROSS SECTION OF THE VAN ALLEN RADIATION BELTS
Distribution of Energetic particles in inner and outer belts

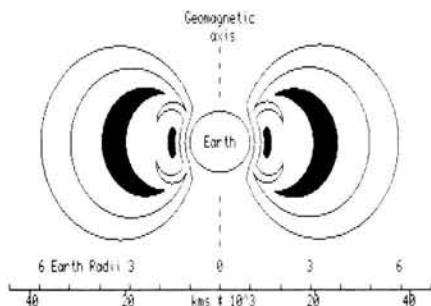


Fig. 1

Phase III-c

The postponed *Ariane-IV* V-22 launch from mid-March has itself been further delayed twice since the earlier date of April

4 proposed in our last column, to what is now currently scheduled as a "middle of May to beginning of June" lift-off from the ELA-2 launch pad at 1230UTC. At the time of writing, May 20 is favoured by AMSAT-DL and June 1 by AMSAT HQ. The date has yet to be firmed up, and a further slight delay may yet affect our anxiously awaited Phase III-c satellite.

The next *Ariane* mission, V-21, was due to take up the Spacenet 3-R and Telecom 1-C on March 4 this year, having been delayed since December 1987 due to the third stage problem. This launch, although not directly affecting our Phase III-c launch, which is from a new launch pad, may well suffer further postponement as a third stage check-out performed on January 11 did not come out at all well! Unfortunately, *Ariane-IV* is also dependant upon the success of this final stage reliability, hence the delay incurred to ensure this.

At the launch time and date proposed for converting Phase III-c into the orbiting OSCAR-13, propagation at h.f. should be excellent, and the "ALINS" (AMSAT Launch Information Network Service) should be heard well throughout Europe on both the 14 and 21MHz bands. **Ralph Wallio WOPK**, AMSAT Vice-President of Operations, announces that he is now busy with the plans to carry the launch live to the world amateur satellite community, and the full coverage plan will be announced soon. AMSAT will undoubtedly be using 14.282MHz, from the Goddard Space Flight Center Amateur Radio Club WA3NAN, on 21.280MHz too, and even 28MHz too if the band is open. As well as the launch and post-launch ejection, transfer orbit burns will also be covered to allow oscarphiles to monitor each serially important calendar event leading to commission of the functioning transponders.

John Lindholm W3XX, who is the American Radio Relay League Membership Communications Secretary, says that additional to the stations already participating will be the ARRL HQ station W1AW, using their long-established frequencies on many bands. **Ron Broadbent G3AAJ**, secretary AMSAT-UK, said on the AMSAT-UK net that they are planning a direct line from the launch site via the University of Surrey, and plans to broadcast the launch live on 3.780MHz via GB0AUK.

Work on the new Phase III-c elliptical orbiter is now complete, and it has passed all systems tests to perfection. The satellite on its last vibration test at Marburg in December 1987 is shown in Fig. 2. The Mode "L" transponder has been proved to have a sensitivity and gain far greater than its OSCAR-10 predecessor, which, due to a bias failure putting the receiver into class "C", needed some 10kW minimum of effective isotropic radiated power to even get a signal through it. OSCAR-13 will need only 25dBW (ca. 350 watts e.i.r.p., or 10 watts to a 14dB gain antenna, or a single 19dB quad loop Yagi if allowing for a typical 4dB of feeder loss) to give an adequate signal of some 10dB over noise. On Mode "JL" some 1 to 2kW e.i.r.p. will be required (30-33dBW e.i.r.p., e.g. 10 watts of transmitter output to a 19dB uplink antenna, such as a single long quad-loop Yagi) to produce a 10dB signal to noise ratio on the downlink.

To help OSCAR-13 planners, (and also to attempt to educate those who persist in

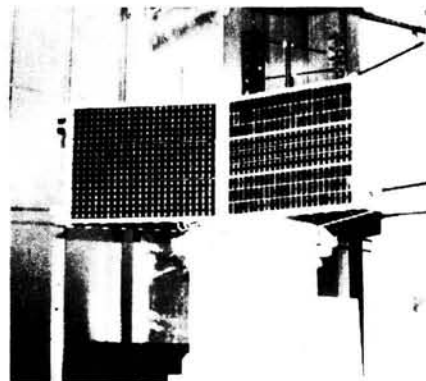


Fig. 2

using excessive power to our existing satellites), Figs. 3 and 4 graph out the multiplier to be used on one's transmitter output power when using antennas of gain in dB isotropic (dBi) or dB over a dipole (dBd) respectively. The calculated or measured feeder loss, in dB, should first be subtracted from the antenna gain. It should be noted that 1 watt to a 20dB gain system, 5 watts to 13dB, or 10 watts to a 10dB system, is the MAXIMUM power required for OSCAR-10, JO-12, or RS-10/11, and any deficiencies at these levels should be made up by improving the receiving system only.

It is expected that 1269/435MHz activity will become a very popular mode, with many more participants than those we earlier listed, who wrestled hard with OSCAR-10 Mode "L" despite the attenuation discovered.

Phase III-c is next to be shipped to Paris for a flight to Cayenne in French Guiana, from where it will travel with special transport by road to the Korou launch site in a jungle clearing by the Atlantic coast. The entire cost of the shipping of the satellite, two metric tonnes of associate equipment, including a whole amateur radio station and two technicians, is being met by AMSAT-UK, who have generously raised £13 500 to pay for the transport from membership funding.

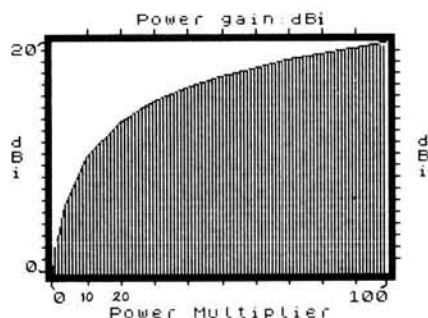


Fig. 3 ▲

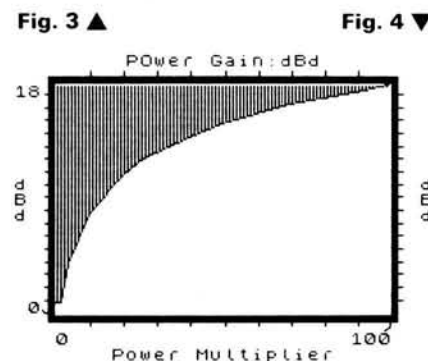


Fig. 4 ▼

Upon arrival at Korou the fuel tanks of the kick-motor will be filled with the very toxic and corrosive unsymmetrical dimethyl hydrazine (UDMH) and nitrogen tetroxide oxidiser, blanketed, and round-the-clock monitoring will be carried out by a special team of AMSAT volunteers until, during and following integration with the launch vehicle.

Despite confidence, the insurance fund, already over the half-way mark thanks to generous contributions from both individual and AMSAT organisation donors will be topped up by AMSAT general funds to give full coverage of any loss or damage. As we said last month, if any supporters wish to contribute they may send donations via AMSAT-UK, G3IOR, or direct to AMSAT, P.O. Box 27, Washington DC 20044, USA.

Phase III-c TLM

The preliminary telemetry channel allocations for our coming satellite have now come in from AMSAT President Vern ("Rip") Riportella WA2LQQ. For BCR read battery charge regulator, IHU internal housekeeping unit, He Helium, UDMH Unsymmetrical Methyl Hydrazine fuel, N2O2 oxidant, etc.

RS-10 & 11

The daylight openings of the 21MHz band have continued to give high levels of attenuation due to high power terrestrial stations operating in the satellite uplink band, and the same solar flux improvement has given up to 15dB of downlink attenuation due to the passage of the signal through the dense layers. The one advantage was the appearance of some excellent sub-horizon in mid-January, with the 29.407MHz TLM and ROBOT being heard well when the satellite was over ZD9 Gough and ZD8 Ascension Island. Sadly, the transponder passband was empty! Your scribe made a few DX QSOs within the mutual footprint with UA0BDW, UA0DQYD, WA1JVV, KC2FD and C30LEV for new ones. The effectiveness of the individually a.l.c. controlled 4kHz passband segments was well demonstrated when on one occasion the G3IOR 50W e.i.r.p. signal was wiped out *en toto* by an ultra-high powered station coming up from 21MHz only 3kHz away. A QSY of only 2kHz brought back an adequate RST 579 downlink again! On darkness paths, the signals are very strong, often peaking well over S.9 on the G3IOR IC-720A S-meter.

OSCAR—9 & 11

The UoS, as optimistically predicted, found a way out of the problem caused by faulty loading of the FORTH language, and the downlinked information all makes good sense again. It took time and effort, as control had to be effected using the less-amenable u.h.f. command uplink, with very careful procedure needed.

A further blow (literally!) hit the UoS when the second winter gale arrived in early January, again damaging the mission control station antennas. Slim and Brian worked bravely in the high winds to complete the dish refit, and again brought back the UoSAT pair to useful service. Prior to this event, Christmas greetings came via satellite with the DIGITALKer playing the first bar of "Jingle Bells" followed by the spoken message "A great Noel from all at UOS". The DIGITALKer has not got the word "Christmas" in its vocabulary, so the words "No" and the letter "L" were cleverly junctioned for the desired sound.

Practical Wireless, April 1988

Channel	Function	Equation	Units
00	Solar panel output and BCR input volts	$n \times 150$	mV
01	70cm TX average power output	$(253-n)^2 / 2000$	W
02	70cm RX temperature	$(n-127) / 1.82$	°C
03	Unallocated		
04	BCR output and main battery voltage	$(n-10) \times 75$	mV
05	Special Purpose		
06	2m TX p.a. temperature	$(n-127) / 1.82$	°C
07	+14V rail current to transponder	$(n-15) \times 20.64$	mA
09	+10V regulator voltage	$(n-12) \times 50$	mV
0A	IHU temperature	$(n-127) / 1.82$	°C
0B	+14V magnetorquer & relay current	$(n-15) \times 4.128$	mA
0C	BCR Oscillator 1 status	0=off, n>10=On	
0D	He tank low side press. control V.	To be determined	
0E	BCR temperature	$(n-127) / 1.82$	°C
0F	+10V regulator current	$(n-15) \times 4.128$	mA
10	BCR oscillator 2 status	0=off, n>10=on	
11	N2O2 oxidiser tank pressure	To be determined	
12	SEU temperature	$(n-127) / 1.82$	°C
13	Battery charge current	$(n-15) \times 10.32$	mA
14	Top (+Z) photocell sun sensor to Z (spin) axis	65=sun normal 20-30 nominal	
15	Motor valve status	To be determined	
16	Auxiliary battery 1 temperature	$(n-127) / 1.82$	°C
17	Active BCR output current	$(n-15) \times 20.64$ 20-30 nominal	mA
18	Bottom (-Z) photocell sensor	65=sun normal 20-30 nominal	
19	S-band TX power output	To be determined	
1A	Auxiliary battery 2 temperature	$(n-127) / 1.82$	°C
1B	Active BCR 28V line input current	$(n-15) \times 10.32$	mA
1C	Spin rate	If $n < 139, r = (139n) \times 0.8 + 20$ or if $n \geq 139, r = 508 / (n-116) - 2$	r.p.m.
1D	24cm RX a.g.c.	if $n < 100$ a.g.c.=0 if $n \geq 100$ a.g.c. = $(n-100)^2 / 189$	dB

The rest of the telemetry will be given next month



Fig. 5

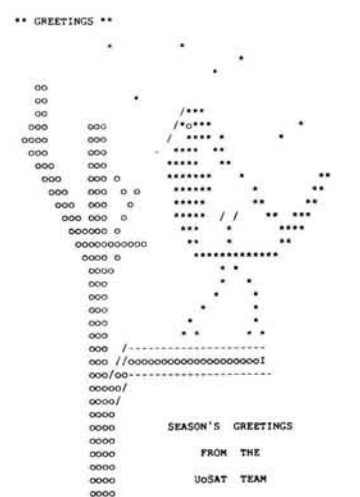


Fig. 6

Well-designed greetings cards, depicted by Figs. 5 and 6, appeared on the bulletin.

UoSAT-3 is now under way at the University of Surrey, with a launch planned for late 1988. It will contain the University built VITA PACKSAT experiment, for which frequency authorisation is now being sought. An interesting job opportunity exists there for an experienced r.f. engineer to work on UoSAT-c as it will be termed until launch.

Keplerian Elements

Our Keplerian elements are the first set out for this year, sent in from AMSAT via the AMSAT-UK hot news service. Remember that "MIR" is firing its motor to re-orientate and changing its orbit regularly, and may not be the same when you receive this. Also, it will be noticed that the sudden surges of Solar Flux we are now experiencing are intermittently increasing

the drag factor (decay) of OSCAR-9, so this may need a regular update too. Remember that you can get updated predictions for OSCAR-9 by phoning the UoS dedicated line on 0483 61707, and for OSCAR-11 on 0483 61202, but MIR updates will be dependant upon the regular trackers, both visual and radio, who give their information on the various nets.

It would appear from incoming correspondence that the rounded-up satellite equator crossing times and the add-on values, given to only one decimal place, are insufficiently accurate for our more demanding customers, who find that two weeks of accumulated approximations produce passes wandering out more than they would desire. For this reason, we give below precise known crossings for just the amateur satellites, with the exact period and longitude increment also supplied for calculating later crossings.

UoSAT-OSCAR-9: Period 94.10700 min-

utes. Longitude Increment 23.523863 degrees. Ascending Node equator crossing for Friday January 22, 1988, 00 hours, 07 minutes, 4.7 seconds, at 71.73 degrees west equator longitude.

UoSAT-OSCAR-11: Period 98.53960 minutes. Longitude Increment 24.635352 degrees. Ascending Node equator crossing for Friday January 22, 1988, 01 hours, 34 minutes, 36.3 seconds, at 55.93 degrees west equator longitude.

FUJI-OSCAR-12: Period 115.65317 minutes. Longitude Increment 29.239313 degrees. Ascending Node equator crossing for Friday January 22, 1988, 00 hours, 29 minutes, 11.9 seconds, at 55.22 degrees west equator longitude.

RADIO 10/11: Period 105.02386 minutes. Longitude Increment 26.381765 degrees. Ascending Node equator crossing for Friday January 22, 1988, 01 hours, 14 minutes, 49.8 seconds, at 242.69 degrees west equator longitude.

Project NORDSKI-COM

Following our last month's information on how to follow the all-amateur radio and satellite communication based North Pole joint UA/VE expedition, **Dick Ensign N8IWJ**, AMSAT Science Education Advisor, has produced an information pack for students. This contains a basic map, a three month prediction sheet, and a full set of required information suitable for overhead projection conversion for classroom use. Please write to Richard C. Ensign, AMSAT Science Education Advisor, 421 Military, Dearbourn, MI 48124, USA, or telephone USA 1 313 278 0900 during the American school day, or 1 313 274 1718 evenings and week-ends for your copy. The trip should commence on March 1.

Satellite	MIR	SALYTUT-7	AJISAI	OSCAR-12	RS10/11
Catalogue No	16609	13138	16908	16909	18129
Epoch Year	1988	1988	19871988	1988	
Epoch Day	11.88147077	11.88337302	306.47344065	9.65181271	10.81955379
Element Set	15	930	62	76	233
Inclination	51.6259°	51.6137°	50.0146°	50.0155°	82.9264°
RAAN	158.3609°	328.9252°	320.1689°	110.6867°	264.6944°
Eccentricity	0.0016529	0.0000193	0.0011300	0.0011217	0.0013281
Arg of Perigee	324.2678°	254.4030°	277.2304°	91.1586°	64.4775°
Mean Anomaly	35.7078°	105.6854°	82.7245°	269.0533°	295.7769°
Mean Motion	15.74235821	15.31859863	12.44369614	12.44394684	13.71886122
Decay Rate	2.0490e-04	2.849e-05	2.5e-07	-2.5e-07	9.0e-08
Orbit Number	10901	32796	5561	6409	2763

Satellite	NOAA9	NOAA10	METEOR 2-14	METEOR 2-15	METEOR 2-16
Catalogue No	15427	16969	16735	17290	18312
Epoch Year	1988	1988	1988	1988	1988
Epoch Day	04.41281172	6.54644685	9.73102420	11.03327249	10.18403848
Element Set	223	108	208	132	77
Inclination	99.0780°	98.6951°	82.5412°	82.4645°	82.5580°
RAAN	337.0412°	39.6379°	303.2801°	213.3147°	274.6474°
Eccentricity	0.0016259	0.0013488	0.0015858	0.0011958	0.0010762
Arg of Perigee	3.4334°	342.9792°	47.0934°	289.5289°	223.2931°
Mean Anomaly	356.6944°	17.0931°	313.1566°	70.4582°	136.7385°
Mean Motion	14.11542380	14.22537363	13.83769119	13.83576441	13.83333695
Decay Rate	9.0e-07	2.04e-06	6.0e-08	6.0e-08	8.9e-07
Orbit Number	15770	6765	8192	5127	2006

Satellite	OSCAR-9/UoSAT-1	OSCAR-10	OSCAR-11/UoSAT-2	METEOR 3-1
Catalogue No	12888	14129	14781	16191
Epoch Year	1988	1988	1988	1988
Epoch Day	9.26122218	9.09680313	9.20080544	9.59217197
Element Set	132	324	282	725
Inclination	97.6311°	27.4358°	98.0797°	82.5495°
RAAN	37.4965°	343.7837°	75.7606°	246.6699°
Eccentricity	0.0001898	0.6025702	0.0013000	0.0019038
Arg of Perigee	177.4528°	270.9897°	167.3707°	166.0385°
Mean Anomaly	182.8754°	24.9971°	192.7829°	194.1272°
Mean Motion	15.31087661	2.05882880	14.62212586	13.16924429
Decay Rate	4.958e-05	-6.0e-07	1.93e-06	4.4e-07
Orbit Number	34825	3440	20580	10647

The next three deadlines are
March 26, April 26 and June 1

Propagation

After 18 years of using a simple radio telescope, I have learnt that the sun is full of surprises. I have come to the conclusion that it is almost impossible to predict what future events this variable star has in store. However, it is well known that sunspots, and the complex activity surrounding them, have a considerable influence over the stability of the earth's ionosphere. Therefore, by publishing regular reports from astronomers and radio enthusiasts, we can learn more about the interesting effect which random solar activity has on the paths of terrestrial radio signals.

Solar Observations

At his observatory in Selsey, **Patrick Moore** made drawings of the sunspots which he located at 1355 on December 27 (Fig. 5(a)), 1020 on January 4 (Fig. 5(b)) and 1015 on the 21st (Fig. 5(c)).

The detailed report on sunspots and filaments seen by **Cmdr Henry Hatfield** (Sevenoaks) with his spectrohelioscope are listed in Fig. 1. "Activity has clearly increased. Some plages are beginning to look quite active," commented Henry about the period from the 4th to 17th.

"The mean sunspot number for December was 26.5 and the daily figures ranged from 17 on the 5th to 52 on the 8th," wrote **Neil Clarke GOCAS** (Ferrybridge). He enclosed his computer print out, Fig. 2, indicating the daily solar flux which varied from 88 to 97 s.f.u. with peaks of 106 s.f.u. on the 26th and 28th.

Fig. 1

Date	Spots	Groups	Flares	Filaments
23.12.87	1	—	—	14
25.12.87	2	—	—	13
31.12.87	1	1 (4 spots)	—	6
4.1.88	2 (double)	—	—	8
7.1.88	3 (1 double)	1 (7-8 spots)	—	3
11.1.88	3 (1 double)	1	—	16
17.1.88	2 (1 double)	2 (5 spots each)	—	6
21.1.88	2	2 (4 & 7 spots)	—	16
22.1.88	—	2 (6 & 7 spots)	—	17

Terrestrial Effects

"Owen Pearson (Edinburgh) reported that his jam-jar magnetometer recorded storm-type activity on December 10, 21 and 22 and January 2 and 16," wrote **Ron Livesey** from Edinburgh. Ron is the auroral co-ordinator for the British Astronomical Association. He told me that the magnetometer used by Karl Lewis (Saltash) was unsettled for periods on December 4, 9,

10, 15, 16, 17, 21, 22 and 23, very unsettled to storm on days 3, 11, 12, 15, 16 and 17 and at storm level from 1400 to 2100 on the 10th.

Ron also received reports of auroral glow from observers in Shetland, Orkney and Alness for the nights of December 10/11, 17/18, 19/20 and 23/24 and arcs and rays from Edinburgh and Helsinki. Strong aurora was seen from Edinburgh on January 14/15 and a lesser event on 6/7 was reported from Finland and south Scotland.

"There was a magnetic storm on the night of January 14/15, but it did not seem to effect radio," reports **Ted Owen** from Maldon.

Henry Hatfield recorded radio noise from the sun, at 136MHz, on December 28, 29, January 1, 10 and 21. **Andy Steven** and **Roger Stapleton** noted radio aurorae on December 21/22, January 2/3 and 7/8.

"On January 14, whilst tuning around, I observed some tone-A signals on the 15MHz broadcast band," wrote **Dave**

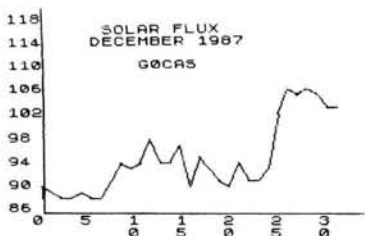


Fig.2

dressler

COMMUNICATIONS LTD.

**191 FRANCIS ROAD
LEYTON · E10 6NQ · LONDON**
TELEX 8953609 LEXTON G
PHONE 01-558 0854 01-556 1415
FAX 01-558 1298

OPEN MON - SAT 9AM - 5.30PM
INTEREST FREE HP FACILITIES AVAILABLE
ON MANY ITEMS PROMPT MAIL ORDER



dressler - ara 30 -
active antenna
50 kHz ... 40 MHz
WITH LIMITED PERFORMANCE UP TO
100MHz

Professional electronic circuitry with very wide
dynamic range. Meets professional demands both
in electronics and mechanical ruggedness. 1.2m
long glass fibre rod. Circuit is built into waterproof
2.5 mm thick aluminium tube. Ideal for commercial
and swl-receiving systems. £129.
See Review in August 1985 Issue p.35

NEW

**DRESSLER
ARA 900
ACTIVE ANTENNA**
50MHz to 1300MHz
Gain 17dB Typical
TECHNICAL SPECIFICATIONS
FOR ARA 900

Gain 17dB Typical (14-17dB)
Frequency Range 50-1300MHz
Noise Figure


10dB at 50-180MHz
1.5dB below 300MHz
2.0dB below 350MHz
2.7dB below 400MHz
3.0dB below 500MHz
3.8dB below 600MHz
4.6dB below 1300MHz

Intercept Point 3rd Order +18dbm at Input
Post £3.00 or Securoc £7.00 extra

£139.00

Both antennas come complete with 7 metres of cable, interface, power supply and brackets.

SWEDISH BRASS MORSE KEY



£65

ICOM IC-735

**£854
SPECIAL OFFER**



ICOM MICRO 2
HANDHELD



**£239 inc. NiCad
Charger & Case**

YAESU FT23/73



POA

**BUY A
R71 FOR £825
& RECEIVE AN ARA 30
FREE
WORTH £129**

ICOM R7000 25MHz-2000MHz
SPECIAL OFFER!!



FREE

ARA 900.
ACTIVE ANTENNA
WORTH £139.00
£969

**ALL SONY PRODUCTS
UK SUPPLIED**

SONY AIR 7

PORTABLE-AM-FM

144-174MHz
108-136MHz
150KHz-2194KHz

£249



SONY ICF 2001D

76-108 MHz
116-136 AIRBAND
153kHz-29.995MHz
FM - AM - SSB 32 MEMORIES
INC PSU, CARRY STRAP
& EARPHONE

£325




SONY ICF 7600D
76-108MHz

ICF 7600 DS
Now available

76-108MHz
153kHz-29.995MHz
Complete with case,
mains power supply,
earphone and
frequency list.

£169



SONY PRO-80
150kHz-108MHz
115.15MHz-223MHz
AM + FM + SSB
40 MEMORIES
£329

Sony Antennas
AN1 £55
AN3 £53



Tidy up your shack

NEW STYLE PW BINDERS


Only £3.95 each (Including
Post, Packing and VAT)

Are you tired of sifting through cardboard
boxes and carrier bags to find that useful
item in PW?

Our **smart new style** binders, covered in
blue plastics, are a must for your library,
keeping your radio magazines in good
condition and easily accessible.

HOW TO ORDER

PW Binders are £3.95 each (including Post, Packing and VAT).
Send a postal order, cheque or international money order with your
order, stating number required to **PW Publishing Limited,**
FREEPOST, Enefco House, The Quay, Poole, Dorset BH15
1PP. Payment by Access, Mastercard, Eurocard or Visa also accepted
on telephone orders to Poole (0202) 678558. Normally despatched by
return of post but please allow 28 days for delivery.

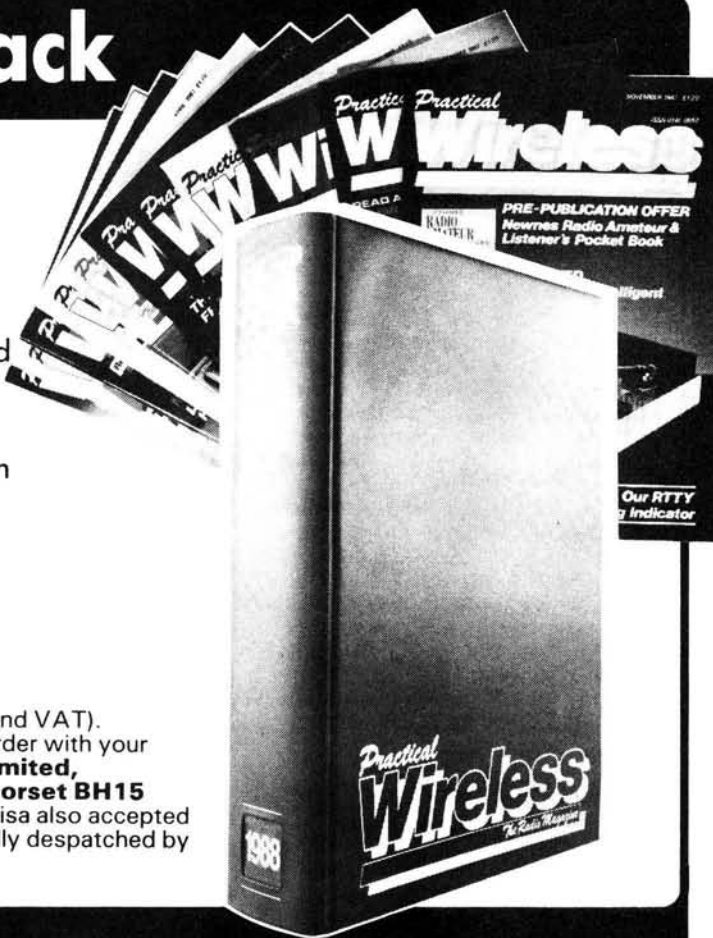

0202 678558



(24 hour Answer Service)

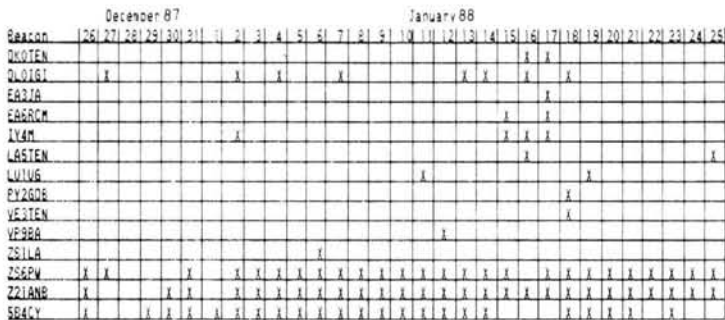


Fig. 3

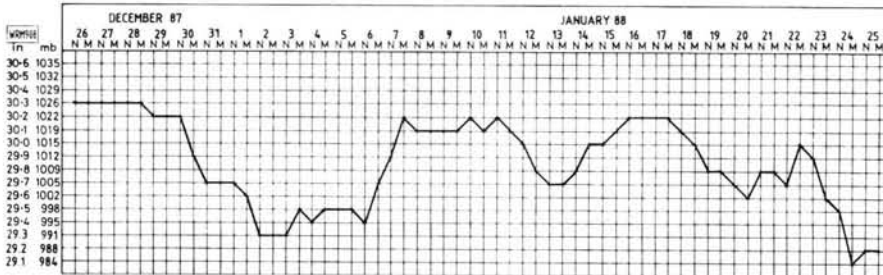


Fig. 4

Coggins (Knutsford). His more detailed check revealed that a large number of stations, ranging from medium-wave to 30MHz, had a rough note. Dave logged signals from Finland, Greenland, Ireland and Scandinavia. He listens to Radio New Zealand on 15.150MHz most early evenings, but noted that this station was inaudible the day before (13th) and the day after (15th) the aurora. He also noticed Radio Norway's signal on 25.730MHz had a slight echo at 1242 on the 13th.

During this event, **Tony Usher G4HZW** (Knutsford) worked into Greenland on 28MHz.

I am advised by the London Solar Society that, owing to illness, they cannot meet the demand for their jam-jar magnetometer kit which I referred to in a recent issue, so please readers, no more requests.

The 28MHz Band

In Bransgore, **John Levesley G0HJL**, using a temporary antenna, received signals from CU, FY, HA, TA and 9Q5 on December 12 and plans to replace it with a multiband vertical.

"Very poor conditions on the high bands this period," said **Bill Kelly** (Belfast). "Things have been pretty well down this last month on h.f.," remarked Dave Coggins on January 22, although, in addition to auroral propagated signals, he managed to find stations from Greenland and Norway on January 2, Cyprus, France, Israel, South Africa and Zambia on the 3rd and Nigeria on the 17th. **Don Hodgkinson G0E2L** (Hanworth) heard FH5EF on Mayotte and VP8BPZ in the Falklands on the 17th.

Propagation Beacons

First, my thanks to **Chris van den Berg** (The Hague), Dave Coggins, Henry Hatfield, Don Hodgkinson, Bill Kelly, **Greg**

Lovelock G3III (Shipston-on-Stour), Ted Owen and **Fred Pallant G3RNM** (Storrington) for their continued monitoring of the 28MHz beacon channels which enabled me to complete the chart in Fig. 3. Apart from the South African beacons ZS6PW and Z21ANB which were well represented in most logs, the final chart is a bit thin. However, the highlight of the month for Don Hodgkinson was hearing VK6RWA for the first time at 1324 on January 12. He also heard KD4EC and VP9BA on the 12th and OH2TEN on the 24th. Greg reports that the German beacon DKOWCY was audible, on 10.14MHz, during daylight hours on most days.

Tropospheric

In Maldon, Ted Owen's barometer showed peaks of 30.35in on December 28, January 16 and 17; lows of around 29.15in on the 2nd and 29.2in on the 3rd, 4th and 22nd. The daily variations in the atmospheric pressure, recorded at my home in Sussex, are shown in Fig. 4. Unfortunately the sample taken for this chart, at noon and midnight, can overlook sudden short lived troughs like the one of 29.3in between midnight on the 21st, when my barograph was reading 29.8in and noon on the 22nd when it was back up to 29.7in.

934MHz

"At 2100 on December 18, Ralph Rowlett GR-587 (Upper Caldecote) found conditions favourable for working stations in Birmingham and Eastbourne," wrote **John Raleigh** from Bedford. John is the secretary of The Four County 32cm Club, and reports that he watched the atmospheric pressure fall from 30.5in at noon on the 22nd to 30.3in at noon on the 23rd. "With the pressure still falling during the evening I worked stations in Bath and Southampton

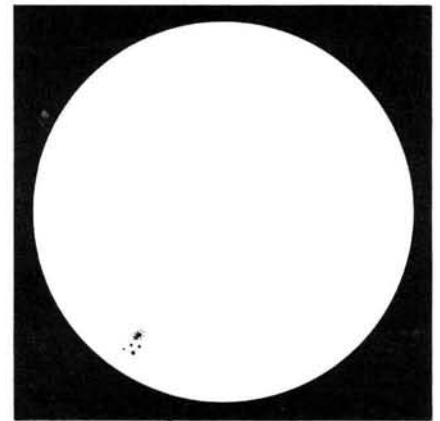


Fig. 5(a)

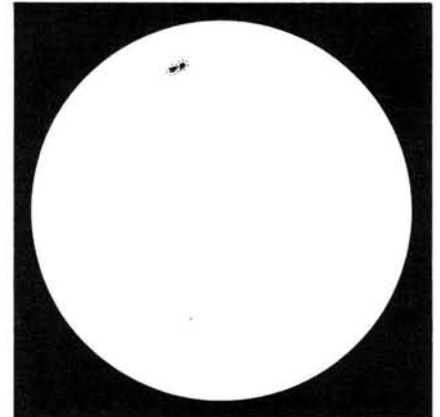


Fig. 5(b)

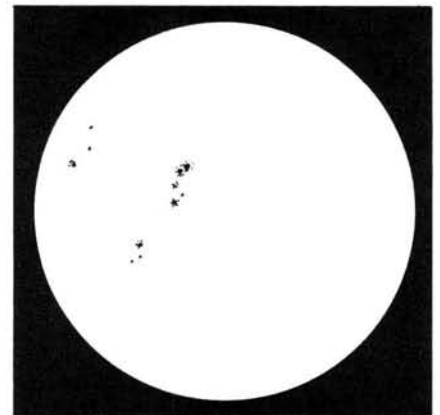


Fig. 5(c)

and around 0030 on the 24th, I had contacts in Birmingham, Portsmouth, Reading, Salisbury and Winchester," said John.

"Very little to report under flat conditions with best contacts to Portsmouth, Southampton and Yeovil, all line of sight," wrote John Levesley UK-627. He told me that MR-05 operating from Portsdown Hill, a high spot overlooking Portsmouth, had members of a local scout troop with him and was helping them to gain their communications badge. John reports hearing GY-186 (Guernsey) on December 12, 18, 22, 23 and 24 and managed to exchange the season's greetings with him on Christmas Day.

Broadcast Round-up

Peter Shore

The news here in Europe during recent weeks includes the changes to long wave broadcast station frequencies on February 1. A listing of the stations affected is contained in the European news section.

New transmitters will be springing up

during this year: the Israeli Cabinet has ratified the agreement with the US government for the construction of Voice of America transmitters in the Arava region of Israel; Deutschlandfunk is to have three new f.m. transmitters and Deutsche Welle

is planning additional transmitters in Africa, Asia and America. The Asian transmitter is needed to replace the Sri Lanka relay station, inactive for many months as a result of the Civil War in that country.

Africa Number One, in Moyabi, Gabon,

Practical Wireless, April 1988

has a new fifth transmitter. The new 500kW transmitter is to improve audibility in Africa.

Radio Canada International has received approval for the construction of four new 13MHz band antenna arrays at the Sackville transmitter site in New Brunswick. These antennas will be used for broadcasts to Europe, Africa, Latin America and North America. Work has started on the project and it is expected to be operational by July next year.

Europe

Note: all times are UTC (GMT)

Long wave frequency changes

200kHz becomes 198kHz

BBC Radio Four & WS (Droitwich 400kW)

Warsaw 200kW

Mayak (Leningrad 150kW)

209kHz becomes 207kHz

DLF (Munich 500kW)

Kiev 500kW

Morocco (Azilal 800kW)

218kHz becomes 216kHz

Norway Programme One (Oslo 200kW)

(Radio Monte Carlo, Roumoules, due to change on February 1, still on 218kHz at February 8)

227kHz becomes 225kHz

Warsaw Programme 1 (Konstantinow 2000kW)

236kHz becomes 234kHz

RT Luxembourg (Junglister 2000kW)

Frequencies above 234kHz will change in 1990.

Programmes in from Radio Culture on f.m. are now in stereo throughout the country.

Radio Polonia in Warsaw has an English schedule to Europe and Africa:

0630-0700 on 15.12, 7.27 and 6.35MHz

1200-1230 on 7.285 and 6.095MHz

1230-1300 on 15.12, 11.84 and 9.525MHz (Africa)

1400-1430 on 7.285 and 6.095 MHz

1600-1630 on 9.54 and 6.135MHz

1630-1700 on 11.84, 9.525 and 7.125MHz (Africa)

1730-1800 on 9.54 and 6.135MHz

1830-1900 on 11.84, 9.525 and 7.125MHz (Africa)

1830-1900 on 7.285, 6.135, 5.995 and 1.503MHz

2000-2030 on 9.525, 7.145 and 7.125MHz (Africa)

2030-2100 on 7.285 and 6.095MHz

2230-2300 on 7.27, 7.125, 6.135, 5.995 and 1.503MHz

Polish for seamen and Poles abroad is aired on: 0000-0200 on 15.12, 11.815, 9.525, 7.27, 7.145, 6.135 and 6.095MHz (seamen)

0400-0600 on 15.12, 11.815, 9.525, 7.145 and 6.095MHz (seamen)

0600-0700 on 9.525, 7.285, 7.145, 5.995 and 1.503MHz (abroad)

0700-0800 on 15.12, 7.285, 7.27, 6.135, 6.095, 5.995, and 1.503MHz (abroad)

1230-1300 on 9.54, 6.135 and 1.503 MHz (abroad)

1300-1400 on 7.285, 6.095 and 1.503MHz (seamen)

1300-1400 on 9.54 and 7.125MHz (abroad)

1500-1600 on 9.54 and 7.125MHz (abroad)

1630-1730 on 9.54, 6.135, 5.995 and 1.503MHz (abroad)

1900-1930 on 7.285 and 6.095MHz (abroad)

2100-2130 on 7.285 and 6.095MHz

(abroad)

2200-2300 on 9.525, 7.285 and 6.095MHz (seamen)

2300-2400 on 9.525, 7.285, 6.095, 1.305, 1.08MHz and 819kHz

Radio Portugal's broadcast to Europe in the evening from 2000 to 2200 including English programming, is now on 11.74MHz, replacing 7.155MHz, with 9.74MHz in parallel. The English language broadcast at 1600 is often well received in Europe, although it is beamed to the Middle East and Asia. The frequency is 15.25MHz.

English language programmes from Radio Bucharest in Romania:

1045-1100 on 15.405, 11.94 and 9.69MHz

1300-1330 on 17.72, 15.405, 11.94 and 9.69MHz

1930-2030 and 2100-2130 on 7.195, 7.145, 6.055 and 5.99MHz

Radio Sweden International has changed its name: it is now known simply as Radio Sweden. The alteration has been made necessary because of the difficulty in translating "International" into some languages.

Moscow's Domestic Services are carried on frequencies in the 18MHz band at present, coincidentally either side of the long-established BBC World Service frequency of 18.08MHz. Moscow's Second Programme, Mayak, is on 18.18 in the mornings between 1000 and 1200, whilst one of the Moscow First Programme channels uses 18.03 from 1000.

Middle East

A new clandestine radio station calling itself "Al Quds, the Palestinian Radio on the way for the Liberation of the Land and the People" sprang up early on New Year's Day and is still going strong. It seems that the transmitter, on 702kHz, originally thought to be from Southern Lebanon, is probably located inside Syria. The station exhorts the population in the West Bank and Gaza Strip to keep up "the popular uprising", and sounds professionally run. Israel was, at one point, considering jamming the station, but transmissions appear to be unimpeded at the present time.

Another clandestine station in this area is Iran's Flag of Freedom radio, heard with good reception in the United Kingdom between 1630 and 1830 on 9.045MHz. The station is hostile to the Khomeini regime in Iran, and the transmitters for these Persian programmes are believed to be in Egypt.

Meanwhile, Libya has begun s.s.b. transmissions, possibly to Egypt, heard some days between 0720 and 1350 on 18MHz, and on others between 1000 and 1150 on 13.5MHz. The programmes carried on these frequencies are not in parallel with the normal Voice of the Greater Arab Homeland transmissions.

UAE Radio in Abu Dhabi has been heard on a new channel of 17.995MHz with news at 1000, and at 1245 the station can be heard on 15.385, 15.135, 11.94 and 11.815MHz. All of these transmissions are in Arabic.

Africa

The International Service of Radio Nacional de Guinea Ecuatorial is on 9.552MHz around 1700-2200, with the exception of Sundays. Radio Mozambique from Maputo is heard on new 9.052MHz at 1800. Radio Tanzania is on 9.685MHz at 1700.

At the beginning of the year, Radio RSA started a new morning German service to Europe on 21.59MHz at 1000-1100. English to Europe continues to be heard:

0630-0730 on 17.825, 17.78, 15.125 and 7.295MHz

1100-1200 on 21.59, 15.39 and 9.75MHz

1300-1600 on 21.59, 17.81, 15.125 and 9.75MHz

2100-2200 on 11.9, 9.58 and 7.295MHz

The DX Corner programme from Radio RSA is on the air Sundays at around 0640 and 2140.

Asia and the Pacific

Domestic stations in Australia were audible in the UK during late January: at around 2000 until fade-out at just after 2100, ABC Tennant Creek on 2.35MHz and ABC Katherine on 2.485 were heard. On Australia Day, January 26, the stations linked up with all the other ABC stations throughout the country and Radio Australia, the overseas service, for a live celebration from Sydney Harbour. Reception of the two 50kW stations in the Northern Territories was fair, with some QRM from utility stations. However, with both those frequencies nearer the medium wave band than short wave, it is remarkable that they should be heard here at all!

Meanwhile, Radio New Zealand has been heard here on 15.15MHz at around 2000, proving that this must be a good time to listen to stations down under.

KTWR in the Mariana Islands is heard at around 1500 on the new frequency of 9.87MHz.

The relay of Radio Beijing by Radio Exterior de Espana has been heard with English in the mornings at 0500 on 9.69MHz.

The Voice of Free China is heard through the facilities of WYFR in Okeechobee, Florida at 2200 to Europe on 7.355, 9.955 and 11.805MHz.

Radio Ulan Bator in Mongolia can sometimes be heard on 12.015 at 1200 for the English programme.

North, Central and South America

Radio Canada International will commence relays during February on the transmitters of Radio Japan in Tokyo. English will be broadcast at 1200 on 15.29 and 17.81 and at 2200 on 17.885MHz. The transmissions will be for thirty minutes each.

WCSN from Boston is now heard:

0000-0200 on 9.85MHz

0200-0400 on 9.87MHz

0400-0600 on 9.87MHz

0600-0800 on 7.365MHz

1200-1400 on 5.98MHz (to North America)

1400-1600 on 13.76MHz

1600-1800 on 21.515MHz

2000-2200 on 15.23MHz

2200-2400 on 9.795MHz

WHRI in South Bend, Indiana is on the air at 1500-1700 on 21.64MHz.

RAE in Buenos Aires has added a new Spanish language transmission on Mondays, Wednesdays and Fridays at 2100 on the usual frequency of 15.345MHz.

HCJB in Ecuador has added 11.79MHz for the programmes at 1900 and 2130, with 15.27 and 17.79MHz in parallel. For the morning programme to Europe at 0645-0800, 11.835, 9.675 and 6.205MHz are used.

Educational

COURSE FOR CITY & GUILDS, Radio Amateurs Examination. Pass this important examination and obtain your licence, with an RCC Home Study Course. For details of this and other courses (GCE, GCSE, Career and professional examinations, etc.) write or phone: THE RAPID RESULTS COLLEGE, Dept. JX22, Tuition House, London, SW19 4DS. Tel. 01-947 7272 (9am-5pm) or use our 24hr Recordcall Service: 01-946 1102 quoting Dept. JX22.

Valves

BILLINGTON VALVES

VALVES, KLYSTRONS, TRANSISTORS

Usually the lowest prices anywhere! Rareities our speciality. Overseas enquiries welcome.

HUGE STOCKS — TRADE/WHOLESALE ENQUIRIES MOST WELCOME

6BZ6 £2.30. 6JB6A £6.25 (matched pair £14). 6JE6C £7.20 (matched pair £16). 6JS6C £7.20 (matched pair £16). Please add VAT @ 15% and £1 P&P.

We wish to purchase valves types PX4, PX25, DA30, KT66, KT88, valve collections, transistors, RF plugs + sockets, shop clearance etc.

For quotations contact Martin Billington

BILLINGTON VALVES, 39 Highlands Road, Horsham, West Sussex RH13 5LP
Phone 0403 864086. Fax 0403 210108. Telex: 87271
Please phone to check office is attended before calling in person

Masts & Antennas

AERIALS, TRAPS. Data 26p S.A.E. Aerial guide £1.00. G2DYM, Uplowman, Devon EX16 7PH.

40FT LATTICE MAST. Rotator, 2m and 70cm beams. 10m vertical £600 o.n.o. Peterborough 204606.

Clubs & Societies

TELEVISION YOUR INTEREST? You need the British Amateur Television Club, only £6 per year — super magazine. Send SAE to: 'Greenhurst', Pinewood Road, High Wycombe, Bucks.

For Sale

USED AMATEUR EQUIPMENT bought, sold, exchanged. SAE for latest list. Secondhand price guide updated monthly. Useful guide for buying/selling. £2. ATU mods add top band to SEM KW, etc. £6.50. Call MARTYN G4SUI-GEEFOR ENTERPRISES, 112 Leeds Road, Mirfield, West Yorks. WF14 0JE. Tel: 0924 495916. Personal callers by arrangement.

Miscellaneous

62VF LOOP ANTENNAS COMPLETE WITH ATU FOR HIGH FREQUENCY HAM BAND TRANSMISSION (SWR One to One 40, 15 and 10 and One Point Five to One 80 and 20) AND SWL's, AND LONG AND MEDIUM WAVE BANDS FOR BCL's. Loops 21 inches square or triangle. D.I.Y. projects. No special skills required. Circuits, Parts Lists with sources of supply and full assembly data. **HIGH FREQUENCY LOOP** 80 to 10 Metres **ES. LONG AND MEDIUM WAVE LOOP** for BCL's **ES. LONG WAVE, MEDIUM WAVE, AND SHORT WAVE LOOP** 1500 to 10 Metres **FOR THE BCL AND SWL ES. SHORT WAVE ATU FOR USE WITH EITHER A LOOP OR LONG WIRE ANTENNA ES. FIELD STRENGTH METER.** Circuit Parts list, supplier, assembly data £2. SAE for details.
F. G. Rylands, 39 Parkside Avenue, Millbrook, Southampton
Tel. (0703) 775054

HEATHKIT U.K. Spares and Service Centre, CEDAR ELECTRONICS, Unit 12, Station Drive, Bredon, Tewkesbury, Glos. Tel. (0684) 73127.

MORSE CODE PREPARATION

Cassette A: 1-12 wpm for amateur.
Cassette B: 12-25 wpm for professional examination preparation.
Each cassette is type C30.
Price of each cassette (including booklets) £4.95
Morse key with separate battery (PP3) — driven solid-state oscillator and sound transducer produces clear tone for sending practice. Price of key with electronic unit £9.58.
Price includes postage etc. Enq. only.

MH ELECTRONICS (Dept PW)
12 Longshore Way, Milton, Portsmouth PO4 8LS

WAVEGUIDE, FLANGES & DISHES. All standard sizes & alloys (new material only) from stock. Special sizes to order. Call: EARTH STATION 01-228 7876. 22 Howie Street, London SW11 4AR.

PULLOVERS, CARDIGANS, HATS individually knitted with your call-sign in large characters. Any colour combinations. SAE or phone for price list. **HEATHERS WOOLIES**, Tree Tops, The Rock, Telford TF3 5AA. 0952 502652.

CLEARANCE SALE
PW Computer Program Cassettes Nos 2, 3, 4, 6 and 7. £1.75 each including p&p and VAT. See page 33 Feb '88 PW advertisement for details.
Send to PW Publishing Ltd, FREEPOST, Enefco House, The Quay, Poole, Dorset BH15 1PP.

INDEX TO ADVERTISERS

AH Supplies	11
AKD	10
Amcomm Of London	15
ARE Communications	13
Arrow Electronics Ltd	34
Birkitt J.	61
Billington Valves	71
Bredhurst	14
Cambridge Kits	12
Colomor	13
Component Centre	70
Cricklewood Electronics	12
Dataman	70
Datong	9
Dewsbury Electronics	9
Dressler Communications Ltd	67
Elliott Electronics	13
FJP Kits	70
Garex	51
Gollidge Electronics	70
Hoves C M Communications	8
Icom (UK) Ltd	4,5,61, Cover 3
ICS Interext.	71
Interbooks	12
J & M Amateur Radio	14
J & P Electronics Ltd	70
KW Ten Tec	14
Lake Electronics	8
Lee Electronics	45
Lowe Electronics	2,3,8
Maplin	Cover 4
Mauniron	70
Merlin Systems	C
M.H. Electronics	71
Radio Shack	72
Random Electronics	12
RAS Nottingham	8
RST Valve	61
Rylands F G	71
SEM	51
Short Wave Magazine	30
South Midlands Communications	Cover 2,6,7,51
Spectrum Communications	10
Stephens James Ltd	13
Sutton Data	61
Tandy	23
Technical Info Services	70
Technical Software	12
Territorial Army	31
Ward Reg & Co Ltd	11
Waters & Stanton	46
Withers R Communications Ltd	27

SPECIAL NOTICE TO READERS

Although the proprietors and staff of *PRACTICAL WIRELESS* take reasonable precautions to protect the interests of readers by ensuring as far as practicable that advertisements in *PRACTICAL WIRELESS* are bona fide, the magazine and its Publishers cannot give any undertakings in respect of claims made by advertisers, whether these advertisements are printed as part of the magazine, or are in the form of inserts.

While the Publishers will give whatever assistance they can to readers having complaints, under no circumstances will the magazine accept liability for non-receipt of goods ordered, or for late delivery, or for faults in manufacture. Legal remedies are available in respect of some of these circumstances, and readers who have complaints should address them to the advertiser or should consult a local Tradings Standards Office, or a Citizen's Advice Bureau, or their own solicitor.

MAKE YOUR INTERESTS PAY!

More than 8 million students throughout the world have found it worth their while! An ICS home-study course can help you get a better job, make more money and have more fun out of life! ICS has over 90 years experience in home-study courses and is the largest correspondence school in the world. You learn at your own pace, when and where you want under the guidance of expert 'personal' tutors. Find out how we can help YOU. Post or phone today for your **FREE INFORMATION PACK** on the course of your choice. (Tick one box only!)

Electronics	<input type="checkbox"/>	Radio, Audio and TV Servicing	<input type="checkbox"/>
Basic Electronic Engineering (City & Guilds)	<input type="checkbox"/>	Radio Amateur Licence Exam (City & Guilds)	<input type="checkbox"/>
Electrical Engineering	<input type="checkbox"/>	Car Mechanics	<input type="checkbox"/>
Electrical Contracting/Installation	<input type="checkbox"/>	Computer Programming	<input type="checkbox"/>
GCE over 40 'O' and 'A' level subjects		<input type="checkbox"/>	

ICS

Name _____ P. Code _____
Address _____
International Correspondence Schools Dept EES 48, 312/314 High St., Sutton,
Surrey SM1 1PR. Tel: 01-643 9568 or 041-221 2926 (24hrs).

YOUR LOCAL DEALERS

STOKE ON TRENT

MRZ COMMUNICATIONS LTD

ICOM - Amateur/PMR/Marine/Air.
YAESU - Amateur MRZ Desk PSU
for ICOM/YAESU Portables.
UK and EXPORT
Tel: (0782) 619658

IRELAND

Radcom Electronics

Icom, Yaesu and most Amateur
Radio Accessories ex stock.

NEW PREMISES:-

Unit 4, Albert Quay,
Cork City.

Tel: 021-632725 and
088 553947

(Mon-Fri 9-5 and Sat 9-3.45)

LONDON

Henry's

27MHz/934MHz Rigs &
accessories in stock.

Lists - S.A.E. (A4) - 26p

Full catalogue (TG/P) -

large S.A.E. £1.00

404 Edgware Road,

London W2 1ED

Tel: 01-724 0323

(Open 6 days a week)

ESSEX

Selectronic

The UK's leading suppliers of
934MHz personal radio
equipment

203 High Street, Canvey
Island, Essex

Tel: 0268 691481

(Open Mon-Sat 9-5.30)

Amateur radio equipment also in stock

HERNE BAY

ICOM (UK) LIMITED

The Official Icom Importer

Unit 8, Sea Street

Herne Bay, Kent CT6 8LD

Tel: 0227 369464

Fax: 0227 360 155

Open Mon-Sat 9-5.30,

(Lunch 1-2.00 pm)

SOUTHAMPTON

South Midlands Communications

Official Yaesu Importer

S.M. House, School Close,
Chandlers Ford Industrial Estate,
Eastleigh Hants SO5 3BY.

Tel: 0703 255111

PORTSMOUTH

Telecomms

Importers of the Nevada
range of 934MHz equipment

189, London Road,
North End, Portsmouth,

Hants, PO2 9AE

Tel: 0705 662145

DEVON

Reg. Ward & Co. Ltd.

The South-West's largest amateur
radio stockist. Approved dealer for
Kenwood, Yaesu and Icom

1 Western Parade,
West Street, Axminster,
Devon, EX13 5NY

Tel: 0297 34918

(Closed 1:00-2:00 and all day Monday)

BUCKINGHAMSHIRE

Photo-Acoustics Ltd.

Approved Kenwood, Yaesu and
Icom dealer (part exchange
always welcome)

58 High Street, Newport Pagnell,

Buckinghamshire MK16 8AQ

Tel: 0908 610625

(Tues-Fri 9:30-5:30, Sat 9:30-4:30)

Closed Mondays

LONDON

D & D ELECTRONICS (Kennington)

*The sort of shop you used to see in
Lisle St. All sorts of surplus supplies,
so come along and browse or send
SAE for info. sheets.*

3a Braganza Street

London SE17 3RD

Tel: 01-793 0054

(Open 6 days a week)

LONDON

AMCOMM OF LONDON

Approved dealer for Yaesu
and Icom

373 Uxbridge Road,
London W3 9RN

Tel: 01-992 5765

(Mail order a speciality)

DERBYSHIRE

Low Electronics

The official importer of the
Kenwood range of equipment
(See main ad. for the full list
of all our shops)

Chesterfield Road, Matlock,
Derbyshire, DE4 5LE

Tel: 0629 2817/2430/4057

MERSEYSIDE

MGR SERVICES

Wirral based communications

ICOM - YAESU - M. MODULES - HOWES

- CIRKIT - WOOD & DOUGLAS -

PART-EX - AERIALS - PMR - MARINE -

MET ANTENNAS - ALINCO -

HEATHERLITE - SPECTRUM COMMS

48, Shrewsbury Road,

Oxton, Birkenhead, L43 2HZ.

Tel: 051 653 3437

(Callers by appointment 9 am-9 pm, Mon-Sat)

**PLEASE
MENTION
PRACTICAL
WIRELESS
WHEN REPLYING TO
ADVERTISEMENTS**

CHESHIRE

FLIGHTDECK

THE AIRBAND SHOP

Specialists in Airband and Shortwave
receivers.

Official agents for Sony, Signal, AOR, Revco,
Lowe and Kenwood (rec's only)

FAIRBOTHAM & Co. Ltd.

58-62, Lower Hill Gate,

Stockport, SK1 3AN.

Tel: 061 480 8080

(closed 1.00-2.15 & all day Thursdays)

WEST SUSSEX

BREDHURST ELECTRONICS LTD.

High St., Handcross,

West Sussex

Tel: (0444) 400786

Situated at the Southern end of M23. Easy

access to M25 and South London.

Open Mon-Fri 9am-5pm except Wed 9am-

12.30pm, Sat 10am-4pm.

MAIL ORDER  RETAIL

★ BRAND NEW 'E' TYPE JAGS IN BOXES CHEAP!! ★

Wishful thinking of course . . . But we do have a few brand new boxed **Rockwell Collins KWM 380 HF** Transceivers cheap at only **£2,595**. Sheer quality of performance without the idiotic gimmicks and built-in music box. Buy it with cash, cheque, Access, Visa, American Express, Diners Club, Trade-Ins or a combination of all of them. HP is also available - full written details on request.

FANCY A NEW ANTENNA?

If it's in stock, we'll sell it to you . . . CHEAP! HF verticals, beams, vhf & uhf fixed and mobile antennas and a lot of odds and sods.

We also stock new **Icom, Kenwood, Yaesu, Tandy** and **Psion** equipment - to name just a few of the makes that we handle.



RADIO SHACK LTD

(Just around the corner from West Hampstead Station on the Jubilee Line)

Giro Account No. 588 7151 Telephone: 01-624 7174

188 BROADHURST GARDENS,
LONDON NW6 3AY





ICOM

Count on us!

IC-R7000, 25-2000 MHz

Commercial quality scanning receiver



With 99 programmable memories the IC-R7000 covers aircraft, Marine, FM Broadcast, Amateur Radio, television and weather satellite bands. For simplified operation and quick tuning the IC-R7000 features direct keyboard entry. Precise frequencies can be selected by pushing the digit keys in sequence of the frequency or by turning the main tuning knob. FM wide/FM narrow/AM upper and lower SSB modes with six tuning speeds: 0.1, 1.0, 5, 10, 12.5, 25KHz.

The IC-R7000 has 99 memories available to store your favourite frequencies including the operating mode. Memory channels can be called up by pressing the memory switch then rotating the

memory channel knob, or by direct keyboard entry. A sophisticated scanning system provides instant access to the most used frequencies. By depressing the Auto-M switch, the IC-R7000 automatically memorises frequencies that are in use whilst it is in the scan mode, this allows you to recall frequencies that were in use. The scanning speed is adjustable and the scanning system includes the memory selected frequency ranges or priority channels. All functions including the memory channel readout are clearly shown on a dual-colour fluorescent display. Other features include dial-lock, noise blanker, attenuator, display dimmer and S-meter and optional RC-12 infra-red remote controller, voice synthesizer and HP 1 headphones.

Icom (UK) Ltd.

Dept PW, Sea Street, Herne Bay, Kent CT6 8LD. Tel: 0227 363859. 24 Hour.

Helpline: Telephone us free-of-charge on 0800 521145, Mon-Fri 09.00-13.00 and 14.00-17.30. This service is strictly for obtaining information about or ordering Icom equipment. We regret this cannot be used by dealers or for repair enquiries and parts orders, thank you.

Datapost: Despatch on same day whenever possible.

Access & Barclaycard: Telephone orders taken by our mail order dept, instant credit & interest-free H.P.



The Dollar has fallen... and so have our Prices!!

PRECISION GOLD MULTIMETERS - OUTSTANDING VALUE FOR MONEY!

BUY NOW, THE TIME IS RIGHT!



Professional
Has all the ranges!
YJ09K £34.95
£27.95

Wide Range
With battery tester.
YJ07H £14.95
£11.95

Versatile
Measures temperature
and capacitance.
YP23A
£24.95

Hobby
Ideal for beginners.
YJ76H £8.95
£6.95

Pocket
Rugged, general purpose.
YJ06G £6.95
£5.45

Comprehensive
With transistor,
diode and
LED tester.
YJ08J £19.95
£16.95

All prices
include VAT.
Please add
50p towards
postage. All
items subject to
availability.



Precision
High sensitivity
on AC
current &
resistance.
YJ10L £41.95
£36.95

Auto Ranging
Top selling
digital.
YJ80B £39.95
£35.95

Practical
Includes
temperature
probe.
YJ79L £64.95
£54.95

Feature Packed
Auto-ranging
with transistor
tester.
YM64U £44.95
£37.95

4 1/2 Digit
Superb
multi-featured
multimeter.
YJ81C £69.95
£59.95

Hobby
Enthusiasts
meter.
YM63T £28.95
£25.95

Push Button
Comprehensive
range of
features.
YJ78K £39.95
£35.95

Low Cost
Push button
digital.
YJ77J £26.95
£21.95

plus ORDER NOW AND GET A **FREE** CARRYING CASE WITH YOUR METER (WORTH UP TO £3.95)

Maplin ELECTRONICS

P.O. Box 3, Rayleigh, Essex. Telephone Sales (0702) 554161.

Shops at: Birmingham, Sutton New Road, Erdington. Tel: 021 384 8411.

Bristol, 302 Gloucester Road. Tel: 0272 232014.

London, 159-161 King Street, Hammersmith W6. Tel: 01 748 0926.

Manchester, 8 Oxford Road. Tel: 061 236 0281.

Southampton, 46-48 Bevois Valley Road. Tel: 0703 225831.

Southend-on-Sea, 282-284 London Road, Westcliff-on-Sea, Essex. Tel: 0702 554000.

Pick up a copy of our 1988 catalogue
from any branch of WHSMITH for just
£1.60. Or to receive your copy by post
send £1.60 + 40p p&p to our P.O. Box
address. If you live outside the U.K.
please send £2.75 or 12 International
Reply Coupons.



**We're passing
on our exchange
rate saving
to you!**