

THE RADIO MAGAZINE

Reviewed This Month Yaesu FT-650 Transceiver For HF & 50MHz

## INSIDE THIS ISSUE

New Digital Product

A Frequency
Sensitive AND Gate

CB High & Low

Packet Panorama

Newsdesk '91


Competition Corner

Radio Diary

**And Lots More!** 

APRIL 1991 £1.60



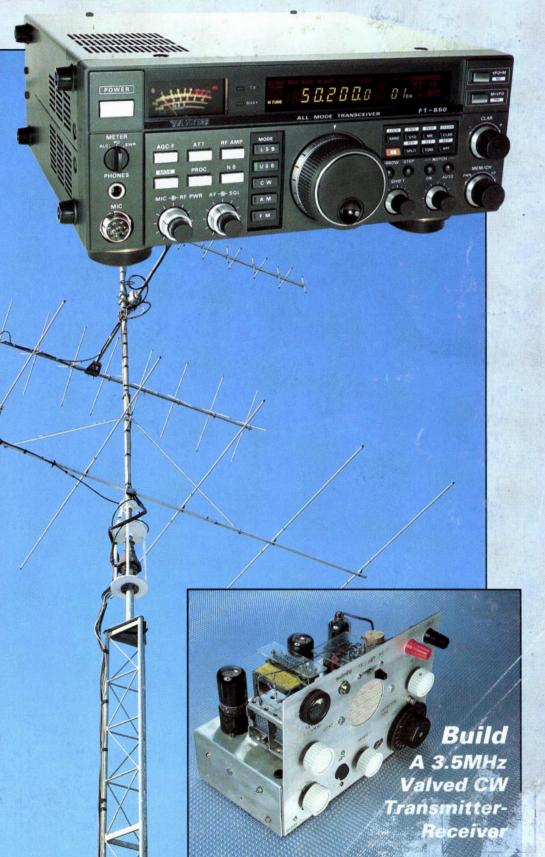

When you're talking Yaesu handhelds, power takes on many

meanings.

Like maximum RF output. Sophisticated microprocessor control. Deceptively simple operation. Even cost savings—as most accessories are interchangeable throughout the line.

Added up, it's no wonder amateurs choose Yaesu HTs

more than any others.

FT-470. DUAL-BAND OPERATION PERFECTED.

2 metre and 430-440 MHz 42 memories. Simultaneous receive of both bands. Dual VFOs each band. Paging feature. DTMF autodialer (10 memories, 15 digits each). Auto repeater shift. Scanning features. Auto power-off. Battery saver. Audible command verification. Keypad and rotary-dial frequency entry. Battery packs available from 2.3 to 5 watts. More.

> FT-411 SERIES, MAXIMUM SINGLEBAND PERFORMANCE.

2 metre FT-411 and 430 MHz FT-811.

49 memories. Dual VFOs DTMF autodialer (10 memories, 15 digits each). Auto repeater shift. Scanning features. Auto power-off. Battery saver.

Audible command verification. Key-pad and rotary-dial frequency entry. Many battery packs available, from 2.3 to 5 watts. More.



2 metre FT-23R, and 430 MHz FT-73R. 10 memories (7 store odd splits). Memory scan at 2 frequencies per second. High/low power switch. LCD power output and "S"-meter display. Auto-battery saver. Alluminium-alloy case. Water-resistant seals. Many battery packs available, from 2 to 5 watts. More.

> Want more information? Call (0703) 255111 Or call into your local authorised Yaesu dealer and ask about the FT-470, FT-411 and FT-23R Series handhelds. The power in handheld performance.

South Midlands Communications Ltd, S M House, School Close, Chandlers Ford Industrial Estate, Eastleigh, Hampshire, SO5 3BY. Telephone (0703) 255111, Fax (0703) 263507, Telex 477351 SMCOMMG.

YAESU

**APRIL 1991** (ON SALE MARCH 14) **VOL. 67** NO. 4 **ISSUE 1009** 

**NEXTISSUE (MAY)** ON SALE APRIL 11

#### **EDITORIAL & ADVERTISEMENT** OFFICES

**Practical Wireless Enefco House** The Quay Poole Dorset BH15 1PP ☎ Poole (0202) 678558 (Out-of-hours service by answering machine)

#### **CREDIT CARD ORDERS**

(0202) 665524 (Out-of-hours service by answering machine) FAX Poole (0202) 666244


Editor **Rob Mannion G3XFD Art Editor** Steve Hunt **Technical Projects** Sub-Editor NG ("Tex") Swann G1TEX Technical Artist/ **Photography** Rob Mackie Production **Sharon George Editorial Assistant Donna Vincent Administration Manager** Kathy Moore **Accounts Manager** Alan Burgess **Accounts Assistant** Darren Howe Clerical Assistant

**Advertisement Manager** Roger Hall G4TNT PO Box 948 London SW6 2DS ☎ 071-731 6222 Cellphone 0860 511382 FAX 071-384 1031

Rachel Parkes


**Advert Copy and** Make-up (Poole Office) Marcia Brogan ₱ Poole (0202) 676033 FAX Poole (0202) 666244

# Contents April 1991



19





#### **Regular Features**

- 71 Advert Index
- 68 **Book Service**
- 13 Competition Corner
- 11 Keylines
- Newsdesk '91 14
- 66 Radio Diary
- Receiving You 11
- 13 Services
- Subscribers' Club 67
- 66 Wireless-Line

19 A Valved Transceiver For 3.5MHz

John Keeley G6RAV

- **PW Review** Yaesu FT-650 24, 28 & 50MHz **All Mode Transceiver** Rob Mannion G3XFD and Tex Swann G1TEX
- **Pulsed System Receivers-Using The Frequency Sensitive AND Gate**

Gerald Stancy G3MCK

**High Impedance Oscilloscope** Probe

Steve Farrow G8IWY

The Oscilloscope In Your Workshop Fred Judd G2BCX

- Reflections Ron Ham
- **PW Review CAP.Co Remote** 43 **Antenna Switching Unit** Mike Richards G4WNC
- 46 A Six Element Experimental **HB9CV**

Tony Martin G4XBY

- **Mathematics For The Radio Amateurs' Examination** Ray Fautley G3ASG
- 49 **CB High & Low** Quavnotes
- **Packet Panorama** Roger Cook G3LDI
- 53 Getting Started - The **Practical Way** Rev. George Dobbs G3RJV
- **Bargain Basement** 57 Readers' Ads

SATELLITE SCENE HAS BEEN **HELD-OVER THIS MONTH** 

COPYRIGHTS PW PUBLISHING LTD. 1991. Copyright in all drawings, photographs and articles published in Practical Wireless is fully protected and reproduction or imitation in whole or part is expressly forbidden. All reasonable precautions are teleble. We cannot however guarantee it and we cannot accept legal responsibility for it. Prices are those current as we go to press.

PUBLISHED on the second Thursday of each month by PW Publishing Ltd., Enefco House, The Quay, Poole, Dorset BH15 1PP. Printed in England by Blackmore Press, Shaftasbury, Dorset. Tet 0747 53034. Distributed by Seymour, Winsor House, 1270 London Road, Norbury, London SW15 4DH, Tel: 081-679 1899, Fax: 081-679 8907, Telesc. 281:2945. Sole Agents for Australia and New Zeeland - Gordon and Gotch (Asia) Ltd.; South Africa - Central News Agency Ltd. Subscription Department, PW Publishing Ltd., Enefco House, The Colorous, The

# OCOM

## IC-2SE, SIMPLE OR MULTI-FUNCTION 144 MHz FM TRANSCEIVER

Icom's tradition of building high quality, reliable handhelds continues with the IC-2SE an incredibly compact handheld designed with features that exceed larger, bulky handhelds. The IC-2SE proves that superior quality comes in all sizes.

#### Slim and unbelievably compact.

The IC-2SE measures only  $49(W) \times 103.5(H) \times 33(D)^*$  mm with the BP-82 Battery Pack. Hold the IC-2SE in your hand to truly appreciate its miniature size. Weighing just 270g† with the BP-82, the IC-2SE will easily fit anywhere – on belts in shirt pockets, handbags, etc. \*1.9(W)  $\times$  4(H)  $\times$  1.3(D) in. † 9.5 oz.

#### Simple design for operating convenience.

Even with its tremendous versatility and a wide variety of functions, the IC-2SE is easy to use. All functions are performed by a total of just six switches and three controls. The IC2SE includes both simple and multi-function modes. The result is two transceivers in one: both an easy-operation and multi-function transceiver. Simple mode ensures totally error-free operations. Multi-function mode allows you a variety of function settings depending on your operating requirements.

#### Other advanced features:

Reduced size doesn't have to mean reduced quality. The IC-2SE proves this with a wide variety of advanced functions.

- Tuning control on the top panel for quick QSYing.
- Monitor function that allows checking of the input frequency of a repeater.
- Function display that clearly shows all information required for operations.
- Splash resistant design and durable aluminum die-cast rear panel for dependable outdoor operations.

#### Options

BP-81 - BP-85

• BA-11, Bottom Cap. Protective cap for terminals on the base of the IC-2SE.

#### Battery packs and case.

<b>BP-81</b>	***************************************	7.2V, 110mAh
<b>BP-82</b>	*************	7.2V, 300mAh
<b>BP-83</b>	***************************************	7.2V, 600mAh
<b>BP-84</b>		7.2V, 1000mAh
<b>BP-85</b>	***************************************	12V, 340mAh
<b>BP-86</b>		Case for six R6 (AA) size batteries

• BC-72E, AC Battory Charger.
Desk top charger for the BP-81- BP-85.

 CP-12, Cigarette lighter cable with noise filter. Allows you to use the IC-2SE through a 12V cigarette lighter sacket. Also charges the

#### • FA-140BB, 144MHz flexible antenna.

Flexible ontenna for 144MHz band operation. Same type supplied with the IC-2SE.

#### •HM-46, Speaker/Microphone

Carrying Case Battery Packs

Combination speaker and microphone equipped with on eorphone jack. Clips to your shirt or lapel.

•**HS-51, Headset.** Headset with VOX function that allows you hands-free operation.

#### • Carrying Cases.

Curry	Battery Case
LC-53	BP-81
LC-55	BP-81, BP-83 or BP-8
1 C 54	BD 84 or BD 85

#### • MB-30, Mounting Bracket.

Mounts the IC-2SE in a vehicle or on a wall.

#### • OPC-235, Mini DC Power Cable.

For use with a 13.8 V DC power supply

4SE, 7cm VERSION NOW AVAILABLE

Actual Size



Datapost: Despatch on same day whenever possible.

Visa & Mastercards: Telephone orders taken by our mail order dept. instant credit & interest free H.P.



## Count on us!

# THE COMPACT HANDHELD WITH A SPLIT PERSONALITY

#### **5 Watt Output Power.**

Utilizing a specially designed ultra-small highly efficient power module, the IC-2SE delivers a full 5 W\* of output power. Bring those distant repeaters into range.

\* At 13.8V DC

#### 48 Memory Channels.

The IC-2SE has 48 fully-programmable memory channels and one coll channel. Each memory and call channel stores an operating frequency and other information required for repeater operations.

#### **Convenient Repeater Functions.**

The IC-2SE is equipped with programmable offset frequencies for accessing repeaters. All memory channels and a call channel store repeater information for your convenience. The IC-2SE includes a newly designed 1750 Hz tone call transmit function. A 1750 Hz tone call transmits when the PTT switch is pushed twice quickly.

### Power Saver for longer operating time.

The power saver ensures lower current flow during standby conditions. Operating times are much longer than with older, more conventional transceivers.

#### **Built-in Clock with timer functions.**

The IC-2SE is equipped with an advanced 24-hour system clock with timer function. The transceiver automatically turns on when reol time matches a pre-programmed time. This is perfect for scheduling QSO's. Auto power-off timers and other settings can be made in clock mode.

#### **Convenient Scan Functions.**

The IC-2SE is equipped with VFO and memory scan.

- **VFO Scan.** VFO Scan repeatedly scans all VFO frequencies. In addition, unnecessary frequencies can be skipped.
- **Memory Scan.** Memory scan repeatedly scans memory channels.

#### **Auto Power Off Timer Function.**

If you ever forget to turn the IC-2SE off, don't worry. It will turn itself off. Power-off time can be selected or deactivated using multifunction mode. Preserve battery pack power for the times when you need it most.

#### Priority Watch.

Why interrupt calls to check other stations? Priority watch monitors a specified station every five seconds while you operate on a VFO frequency. Continue with your communications and let priority watch do the checking for you.



## South Midlands


Southampton (0703) 255111 Leeds (0532) 350606

Chesterfield ((

## SPRING SALES

WHY NOT SHAKE OFF THE WINTER BLUES WITH A SPRING SPECIAL FROM **SMC** 



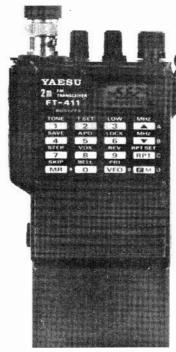

We are pleased to offer **FREE** with every FT-23R, FT-73R, FT-411, FT-811, FT-911 &FT-470 cm FNB9 NiCad Pack and NC27C Charger.

This makes these some of the best value hand-helds around.

FT-23R **£209** FT-73R **£229** FT-411 **£225** FT-811 £239 FT-911 £329 FT-470 £369

### OR THE INCREDIBLE FT-736R

With a FREE 6m module, a saving of £239 on the normal retail price. You pay only £1359 for arguably the world's best multiband VHF/UHF Station



★ ALL THESE OFFERS AVAILABLE FROM 14th MARCH TO ★ 30th APRIL FROM ALL AUTHORISED YAESU DEALERS

Southampton (0703) 255111 SMC HQ, School Close, Chandlers Ford Ind. Est.

Nowell Lane Ind. Est. Nowell Lane Ind. Est. Nowell Lane, Leeds LS9 6 JE. 9am.-5.30pm. Mon-Fri 9am.-1pm Sat Eastliegh, Hants SO5 3BY, 9am.-5pm. Mon-Fri 9am.-1pm Sat

Chesterfield (0246) 453340 Leeds (0532) 350606 Chesterneia (U240 SMC Midlands, 102 High Street, New Whittington Chesterfield, 9.30am.-5.30pm. Tues-Sat

Birmingham 021-327 1497 Birmingham. 021-327 I SMC Birmingham. 504 Alum Rock Road, Alum Rock, Birmingham B8 3HX. 9am.-5.00pm. Tues-Fri 9am.-4pm Sat.

Axminster (0297) 34918 Axminster (0297) 34918
Reg Ward & Co. Ltd.
1 Western Parade.
West Street,
Axminster,
Devon EX13 5NY.
9.00am.-5.20pm. Tues-Sat

## mmunications Ltd.

0246) 453340 Birmingham 021-327 1497 Axminster (0297) 34918



#### **TOKYO HY-POWER**

SAGRA-600

2M LINEAR AMPLIFIER 600W OUTPUT 25W DRIVE (NOMINAL) 2 X 4CX250B VALVES

NOW ONLY **£799.00** 

AS REVIEWED IN APRIL 90 HAM RADIO TODAY

#### HF LINEARS



HL/KGX

160-10m 2 X 4CX250B 1kW PEP RF INPUT 70-120W DRIVE £875.00



160-10M 2 X 3-500Z 2kW PEP RF INPUT 60-120W DRIVE £1425.00

#### VHF LINEARS

#L37V 2m 3W in 32W out RX Pre-camp £89 #L62V 2m 10W in 60W out RX Pre-camp £135 #L110V 2m 2/10W in 100W out RX Pre-camp £215 #L180V 2m 3-25W in 120W out RX Pre-camp £295	.00 .00 .00
#L180V 2m 3-25W in 120W out RX Pre-amp #295 #L36U 70cm 3/10W in 40-50W RX Pre-amp #135 #L60U 70cm 10/25W in 50W out RX Pre-amp #215 #L130U 70cm 3-25W in 120W out RX Pre-amp #389	.00

## SMC...For all your accessories

#### **BASE STATION ANTENNAS**

OSTD-HP	10-80m Trapped Oipole	
OSG5RV	10-40m Half size G5RV£19.50	
OSG5RVF	10-80m Full size G5RV£25.49	
HF3VNB	12-17-30m Vertical £79.00	
28H\$-2HB	10m H89CV 2 Element£65.00	
VHF/UHF		
DSC 770	Discone 70-700MHz£24.95	
TW435D	Discone 400-1200MHz£46.00	
D130	Discone 25-1300MHz £75.00	
2HB6	6m HB9CV 2 element £35.00	
HS-GP62	6m 2step collinear	
ABC23	2m 3 x 5/8 collinear £63.97	
GP23	2m 3 x 5/8 collinear £45.00	
GPV5S	2m 2 x 5/8 collinear £45.49	
SQ144	2m Swiss Quad (Vert. Pol) £67.95	
GP714	70cm 14 step collinear £88.20	
WX1	2m/70cm 4.5/7.2dB collinear £54.99	
WX2	2m/70cm 6.0/8.0dB collinear£75.00	
WX4	2m/70cm 7.8/10.8dB collinear £99.00	
CA2X4WX	2m/70cm 6.5/9.0dB collinear £79.00	
CA2X4MAX	2m/70cm 8.5/11.9d8 collinear£99.95	
LT606	Log Peridoic 50-500MHz £184.00	
MOBIL	E ANTENNAS	

SMC17SE	17m Foldover	£18.75	9
RSL28b	10m Foldover	£13.95	
PL20M	20m Fixed	£22.43	
PL40M	40m Fixed	£22.43	
PL80M	80m Fixed	£23.58	- 3
PL160M	160m Fixed	£23.58	
HELI5	10/11/12/15/20m two section	£48.88	
FLEXI10	160-10m	£80.39	
VHF/UHF			
2QW	2m 1/4 wave	£4.95	- 0
2NE	2m 5/8 wave foldover	£13.25	
VM-144HP	2m 7/8 wave foldover	£31.95	
78B	2m 7/8 wave ball	£15.00	- 0
88F	2m 8/8 wave	£18.00	- 8
268E	70cm 2 sect collinear	£32.80	3
358	70cm 3x 5/8 wave	£33.73	×
VM-727RS	2m/70cm 1/2 + 2 x 5/8 wave Hi Pwr .	£27.75	ij
VM-727SKR	2m/70cm 1/2 + 2 x 5/8 wave	£24.96	ğ
HS-727VMS	2m/70 1/2 + 2 x 5/8 wave shortened .	£25.96	B
CA2X4MB	2m/70cm 4.5/7.4dB	£37.75	
CA2X4KG	2m/70cm 2 x 5/8 + 4 x 5/8 wave	£39.95	

MOUNTS		
SMCGCCA	Gutter Clip c/w 4m cable £14.25	В
SMCSOCA	Cable Ass. 4m S0239/PL259	В
SMCSOCAL	Cable Ass. 6m S0239/PL259 £7.20	В
HS-TMK	Trunk Mount H.Duty c/w cable£18.50	В
SOMM	Mag Mount c/w 4m cable £12.75	В
SMCGCD	Gutter Clip only	В
BSD	Bumper Strap	В
RSM4M	Mag Mount c/w Cable Ass£25.88	В
TBR	Hatchback Mount £11.25	В
MIRI VHF/U	HF	
CHL21J	2m/70cm 0/2.15dB £14.49	В
CHL23J	2m/70cm 2.15/3.8dB £16.95	В
HS-727SS	2m/70cm 0/2.8dB£16.95	В
MOUNTS M	INI	
RS17	Mini Trunk mount only£12.50	Α
RS16	Mini Gutter Clip only £12.50	Α
CK-3LX	Mini Cable Ass. RS16/RS17 £15.95	В
SSB1	Mini Hatch Mount c/w 5m cable£26.50	В
SS-BM	Mini Multipurpose Mount only £10.00	В
JAYBE	AM	
HF	Fu-10, 695	
MM3	Minibeam 10-15-20m£408.25	D
VR3MK3	Vertical 10-15-20m £92.00	Č
TB1MK3	Dipole 10-15-20m £133.40	C
TB2MK3	2 Ele vagi 10-15-20m£264.50	D
ТВЗМКЗ	3 Ele yagi 10-15-20m£394.45	D
VHF/UHF		
		_

VR3MK3	Vertical 10-15-20m	£92.00	C
TB1MK3	Dipole 10-15-20m	£133.40	C
TB2MK3	2 Ele yagi 10-15-20m .	£264.50	D
ТВЗМКЗ	3 Ele yagi 10-15-20m .	£394.45	D
VHF/UHF			
DB4	4m/6m 4 ele yagi	£153.99	D
4Y6M	6m 4 ele7dBd	£64.63	C
4Y/4M	4m 4 ele yagi	£53.25	С
HO/2M	2m Halo Head Only		Α
HM/2M	2m Halo c/w 24' mast	£15.07	В
C5/2M	2m collinear	4.8dBd£116.27	C
LR1/2m		4.3dBd £49.91	С
LW5/2m	2m 5 ele yagi	7.8dBd£24.38	С
LW8/2M	2m 8 ele yagi	9.5dBd£31.28	C
LW10/2M	2m 10 ele yagi	10.5dBd£37.95	С
LW16/2M	2m 16 ele yagi	13.4dBd£55.43	D
PBM10/2M	2m 10 ele parabeam	11.7dBd £75.33	C
PBM14/2M	2m 14 ele parabeam	13.7dBd£91.54	D
Q4/2M	2m 4 ele quad	9.4dBd£48.53	С
Q6/2M	2m 6 ale quad	10.9dBd £63.14	С
Q8/2M	2m 8 ele quad	11.9dBd£78.66	D
D5/2M	2m 5 over 5 slot yagi	10.0dBd£44.39	С
08/2M	2m 8 over 8 slot yagi	11.1dBd £60.84	С
5XY/2M	2m 5 ele cross yagi	7.8dBd£47.15	С
8XY/2M	2m 8 ele cross yagi	9.5dBd £60.15	С
10XY/2M	2m 10 ele cross yagi	10.8dBd £75.33	С

C8/70	70cm collinear	6.1dBd£123.17	C
D8/70	70cm 8 over 8 slot Yagi	12.3dBd £44.51	C
P8M18/70	70cm 18 ele parabeam	13.1dBd£53.94	D
PBM24/70	70cm 24 ele parabeam	15.1dBd£70.50	D
MBM28/70	70cm 28 ele multibeam	11.5 dBd £35.88	C
MBM48/70	70cm 48 ele multibeam	14.0dBd£57.39	C
MBM88/70	70cm 88 ele multibeam	16.3dBd£80.04	D
8XY/70	70cm 8 ele crossed Yagi	10.0dBd£69.00	C
12XY/70	70cm 12 ele cross Yagi	12.0dBd£85.56	C
D15/23	23cm 15 over 15 slot	15.0dBd£75.21	C
D15/24	23cm 15 over 15 slot	15.0dBd £75.21	C
	indian and outless are a		

#### **CREATE**

714X-3	3/4 ele Yaqi	15-20-40m£799.00	Е
AFA40	2 ele Yaqi	40m£375.00	D
CO218	3 ete Yagi	10-15m£199.00	D
CD318JR	4 ele Yaqi	10-15-20m£299.00	D
CD318	4 ele Yaqi	10-15-20m£349.00	D
CO318B	5 ele Yagi	10-15-20m£449.00	0
CD318C	6 ele Yagi	10-15-20m£725.00	D
CL10	5 ele Yaqi	10m£215.00	D
CL15	5 ele Yaqi	15m £319.00	D
CL40B-4	3 ele Yaqi	40m £999.00	E
CV730V-1	V-dipole	10-15-20-40m£149.00	D
CY103	3 ele Yagi	10m £120.75	D
CY104	4 ele Yaqi	10m£171.35	D
CV48	Vertical	40m	D
AD385	Switch Box	40/80m use with CV48 £49.00	В

BALUNS		
3L40X	1:1	3-4
RAG-1.1A	1:1	1.8-

BL40X	1:1	3-40MHz	S0239	1kWPEP £19.49	- 1
RAG-1.1A	1:1	1.8-30MHz	S0239	2kWPEP £25.99	- 1
CB2F/2k	1:1	2-30MHz	S0239	2kWPEP £29.95	- 1
CB2F/4k	1:1	2-30MHz	S0239	4kWPEP £55.00	- 1
CB2F/6k	1:1	2-30MHz	'HN'type	6kWPEP £175.00	-
CB2F/10k	1:1	2-30MHz	'HN' type	10kWPEP . £450.00	- 1
CB2F/5k	4:1	50MHz	'N' type	3kWPEP £103.50	- 1
CBL-30	1:1	1.7-30MHz	S0239	1kWPEP £18.50	-
CBI -2000	4.4	DE COMMY	20220	SMANDED COLOR	

CF476MN	144/430 Ouplexer UHF/N conn £25.50	В
HS790DN	144/430 Duplexer UHF/N skts£25.50	8
CFX4310	144/430/1200 Triplexer£38.00	В

#### PRICES FOR POSTAGE ON ALL THE ABOVE ITEMS ARE

CODED AS FOLLOW A = £1.75 B = £4.00 C = £6.00



SMC12SE





- ■Free Finance on selected items, subject to status. Details available on request.
- Up to £100 instant credit, a quotation in writing is available on request, subject to status.
   Yaesu Distributor Warranty, 12 months parts and labour.
- Carriage charged on all items as indicated or by quotation. Prices and availability subject to change without prior notice
- Same day despatch wherever possible.

YOU WILL ALWAYS GET THE BEST DEAL AT

SEE US AT **BIRMINGHAM NEC** 27th and 28th April

**BLACKPOOL** Norbreck Castle - 17th March

SANDOWN PARK
RSGB UHF Convention — 24th March

#### KENWOOD TS850S

The ultimate transceiver for the CW operator - £1.295

#### AR1000 Series II

Now covers down to 500KHz, SMD technique PCB. Same good price £249. Still available on interest free finance - £50 dep and 8 x £24.88

#### New MVT7000

100kHz to 1300MHz hand scanner PHONE FOR PRICE

#### **NEW NRD535**

Superb gen coverage receiver. Send large SAE for the amazing specification info! £1.095

#### **NEW C5608D**

Standard's all mode, dual bander, full duplex etc. £649

#### ICOM IC 735



BARGAIN! £899

#### LATEST YAESU DUAL BANDERS

See the 2m/70cm and 70cm/1296 models

#### **NEW YAESU MINIS**

Latest handies for 2m and 70cm

#### NEW ICOM W2

Dual band hand held £385

#### TM241E NEW MODEL 2M MOBILE

£58 dep. 8 x £28.88



#### TH77E NEW MODEL

Kenwood Dualband handy £78 dep. 8 x £38.88

#### C5608D 2M/70cms

True twin band, simultaneous TX/RX

£649

£130 dep. 8 x £64.88

SWEDISH KEYS Back at last! £79

Finance available subject to status. Typical APR 34.28%. Mail Order Finance also available — Please telephone any branch. finance available on selected items from our wide range. List of qualifying items on request or please 'phone.

CARRIAGE and INSURANCE ADD £6 UNLESS COLLECTING

### SAVE MONEY WITH OUR **0% FINANCE**

Our special, zero interest credit terms are still available on selected products. including some of these items. Call to check out the figures - you will be amazed!

### COMET **ANTENNA**

'The effective aerial' 3 NEW ANTENNAE

B10 - Black mini dual bander. non radial £16.65 B20 — Black slim line, dual bander £23.20

- Vertical for 80, 40, 20, 15, 10 and SIX with loaded radials £225

GPX2010 Highest Gain Dual Band Base antenna in the WORLD!

7.9 Metres long 9.5dB/2M 13.2 dB/70cms ... £142.95
CDS150 DISCONE in S/Steel 25/1300 Mhz ONLY ... £59.95
CHL72S NEW 2/Band BNC whip for Dual Band Handhelds ... £11.85

NON RADIAL: Mobile automass independent of vehicle ground plans
CHL21J 144/432 Mhz, Unity/2.15dB, 100W Only 29cms long

£14.49
CHL23J 144/432 Mhz 2.15dB/3.8dB 100W Only .44 metres £16.95
CHL24J 144/432 Mhz 2.15dB/5dB 100W 0.8 metres long ... £25.30
CHL25DH 144/432 Mhz 3.0dB/5.5dB 200 Watts 0.95 metres long res long .**£32.80** 

2x4 Series + Triband mobiles and base station antennas 2x4M 144/432 Mhz 4.5/7.2dB 150 watt 1.53 metres \$37.65 2x4 SERIES & DUAL BANDERS featuring the unique super linear converter

System 2x4MAX 144/432 Mhz 8.5dB/11.9dB 200 Watt 5.4 metres "N" G. Fibre 2x4WX 144/432 Mhz 6.5/9.0dB 200W 3.18 metres \$78.95 2x4SUPER II 144/432 Mhz 6./8.4dB 200W 2.43 metres Glassfibre

2x4FX Compact 144/432 Mhz 4.5/7.2dB 200W 1.79 metres 255.80 DUPLEX & TRIPLEX Zinc alloy discast CFX5140 50/144/432 Mhz 800/800/500 Watt PEP 55dB isolation

R Series to order only. MOND BANDER MOBILE ANTENNAS CA285 5/8 wave 3.5d8 300Watt 1.32 Metres Base loaded ...£15.00 CA287C 7/8 wave 52.dB 200W 1.89 metres double co-phase £22.50 CA430TM 3 x 5/8 wave 432 Mhz 6.8dB 150W 1.47 metres ...£29.95 MONOBAND BASE ANTENNAS ABC21 5/8wave Ground Plane 144 Mhz 3.4dB 200W 1.4 metres

ABC22A 2 x 5/8 wave 144 Mhz 6,5dB 2,87 metres ... 236.00 ABC23 3 x 5/8 wave 144 Mhz 7,8dB 200 W 4.5 metres ... £59.50 ABC71 5/8 wave ground plane 432 Mhz 3,4dB 54 metres ... £21.56 ABC72 2 x 5/8 wave G 432 Mhz 200 W 5,8dB 1.07 metres £35.00 CA712EF 432 Mhz Twelve x Half wave! 9,5dB 3,10 metres ... £55.00

CHA-5 Vertical with Loaded Radials for 80/40/20/15/10 M 200W SSR

CRZ/DISCONE & HANDHELD ANTENNAS CRZ120B A Unique wide band Active antenna 500Hz to 1500 Mhz 1.24

CDS180 Discone 28-1300Mhz + TX 6/2/70/23 CRZ-07 Mobile Wide-band Active New "Prestige" range of ultra-high quality antennas now in stock.

Send SAE for new catalogue and full price list

deal - a fair deal - the best deal

For a good

**HEAD OFFICE:** 

5 The Street, Hatfield Peverel, Chelmsford, Essex CM3 2EJ Tel: 0245 381626/381673 Fax: 0245 381436

Hours: 9-5 (Closed Thursdays)

**GLASGOW:** Unit 17 Six Harmony Row Goven Glasgow Scotland G51 38A Tel: 041 445 3060 Hours: 8.30-5.30 Mon-Fri

**(closed Saturda**)

WIGAN: Greensway Arcade Gerrard Street Ashton-in-Makerfield Wigan, Lancs Tel: 0942 713405

LEICESTER: DAVE FOSTER (Agent) elephone: 0533 608189 Latest calls 8.30pm please!




Metres with controller





YOUR ORDER CAN BE TELEPHONED WITH CREDIT CARO DETAILS & DESPATCHED IMMEDIATELY! FREE FINANCE ON MANY MAJOR ITEMS AT RRP. (Ask for details of qualifying items – see examples above)

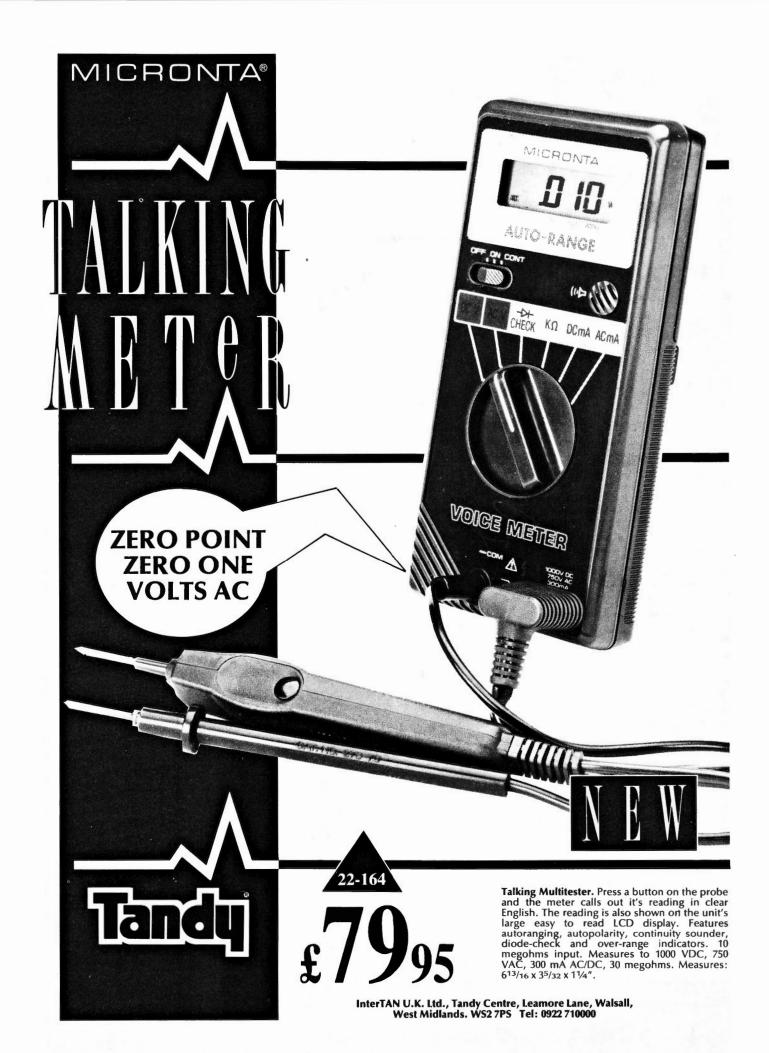

FOR YOUR CHOICE

KENWOOD - ICOM - STANDARD

### ICOM IC-R100 WITH SSB!



IC-R100 Mobile/Base Receiver now with SSB!

#### WHY SETTLE FOR ANYTHING LESS!

For the enthusiast who prefers a more permanent installation the IC-R100 is ideal giving full frequency coverage of 500kHz-1800MHz and AM/FM. FM wide modes of operation. The IC-R100 boasts 100 memory channels to store your favourite stations and has features similar to the little pocket receiver.

**ONLY FROM US -**WITH SSR!

#### THE AMAZING ICR1

for Best

Scan Receiver now at a new amazing price!

PHONE FOR BEST PRICE!

Frequency range 100kHz to1300MHz no gaps AM or FM Also available on easy terms.

Other Scanners Available -JUPITER II FAIRMATE UNIDEN

## at NEC and Sandown Park

As always we will be there with superb deals. Whether it's part exchange, terms, credit card or cheque, we will offer prices that cannot easily be beaten. If our prices at the recent London Show made our competitors cry - then wear raincoats and Wellington boots when you come to NEC and Sandown Park.

SPECIAL SHOW OFFER! BONUS VOUCHERS ON ALL STAR ITEMS SHOWN AND MORE!

#### STANDARD C528

Probably the most versatile dual band hand held

available!

Packed with so many features that we haven't the room to list them all. But we will try a few: **Full Duplex Dual Receive Extend Cover** Programmable Offsets DTMF **5 TONE PAGER RECEIVE 130-175** 330-470 820-960

OPTIONS: CTCSS



#### ICOM IC-725 or 726 HF

Transceivers for both mobile or base the 726 HAS 6 meters inc.



PHONE FOR OUR PRICE YOU WILL BE AMAZED

#### A DREAM COME TRUE

**Bored with two metres?** Then why not turn that 2m rig onto the HF bands



YAESU

FT290R II £395 **2 METRE TRANSVERTER TOKYO HX240 Transverter £229** WITH AUTO SWITCH £249

With the HX 240 feed in 3 to 10 watts on 2m and transmit on 10-15-20-40 or 80 with 40 watts

#### Once again ARE COMMUNICATIONS **BREAK THE PRICE BARRIER!**

Now a 2 Metre Hand -Held transceiver made by Kenpro. Model KT22E for £139 inc. VAT

Package includes NICAD pack charger and antenna.

- Fully synthesised
- Thumbwheel tuning
- 10MHz cover on RX
- 1750kHz Tone Burst
- 600kHz Shift for repeater operation
- Low and High power

PHONE FOR BEST PRICE



12 Monthly Payments of £13.55

ALL EASY TERMS ARE BASED ON AN APR of 34.4%

Opening Hours Monday-Friday 9.30-5.30 **NOW OPEN SATURDAY 10.00-5.00pm** Car parking at rear of shop.

ARE Communications Limited, 6 Royal Parade, Hanger Lane, Ealing, London W5A 1ET. England Tel: 081-997 4476 Fax: 081-991 2565

## Waters & Stanton 0702 206835 or 204965

25W 2M

BEST PRICES! FAST MAIL ORDER

4*LINCO* 

## The Serious Alternative!

Join the hundreds of happy ALINCO users with one of these 1991 models.



#### DJ-160E

3 Watts 2m FM 140-170MHz
Rx •Key pad Entry •Rotary
tuning •Scanning
•12.5/25kHz steps •21
memories •DTMF •Battery
Saver •12v DC-DC •700mAh
Pack •Rapid charger •Tone
Burst •600kHz shift •Auto
Power Off •142 x 57 x 32mm
•Rubber Duck etc.



#### **DJ-120E**

2.5 Watts 2m •140-170MHz Rx •LCD Readout •10 memories •12.5kHz steps •1750Hz tone eRepeater shift •12v DC-DC •Battery Saver •S-meter •700mAh Pack •AC Charger •Rubber Duck •165 x 60 x 30mm •Full UK Spec.



INCLUDES DJ-560E TONE SQUELCH

2m & 70cm 2W •130-174 & 400520MHz Rx •Key pad entry •Rotary tuning • 2 x Vol/Squ controls
•5/12.5/25/Eth z et steps •DTMF
•Dual Watch •Scanning •Bell
alarm •40 memories •12v DC-DC
•Auto dial •AC charger
•700mAh pack •169 x 57 x 32mm
•Rubber Duck •Plus many other
features. •Phone for details.

**DR-112EM** 

**Price** 

Crash!

Memory skip • Priority ng kit • Built in speaker



#### **NEW PREMISES**

Our new super store is now open. Located right next to our old premises, you'll have no trouble in finding us. We have our own private car park and air conditioned show room. Mail order facilities have been expanded to cope with the increase in demand. We now use 24 hour Parcel Force upon request, which offers a true 24 hour delivery. For this service try to get your orders in by 12 noon.

#### NEW PRODUCTS

There is a continual influx of new products. This month sees the new **Kenwood TS850** hf transceiver. A real beauty! We also have the new Kenwood TM702 dual band dual display 2m/70cms rig coming in at £449. There's a new scanner on the way and we can now normally offer the Kenwood TS950 and TL922 from stock. And don't forget, we can supply most brands of products from stock including aerials. Why not send for a free copy of our famous price list crammed with nearly 800 products! Nobody has a wider selection of products!

DJ-460E For 70cms also in stock £229



The new DR 590E transceiver should be available by about the time you read this! Compare its features and you will see why ALINCO is growing from strength to strength in the UK. Send for details.

2m & 70cms ● 45 Watts ● 10 or 5 Watts low power ● Dual watch ● Full Duplex ● Automatic Repeater Memory ● 38 Memories ● Auto Band Change ● Reverse Repeater ● 6 channel steps 5-25 kHz ● Brighness control ● Priority ● Bell Function ● Detachable front panel option ● Built-in speaker ● Fist mic and full mounting kit ● 150 x 50 x 178mm.

#### KENWOOD SPECIALIST DEALER



TS 850! £1295 + FREE PSU!

All Models stocked Best Deals! Wide range in stock Full 12 month warranty Phone for latest DEALS!

£862
£1138
£985
£1495
£1495
£389
£599

Retail and Mail Order: Retail Only: 22 Main Road, Hockley, Essex SS5 4QS. Tel: (0702) 206835/204965 12 North Street, Hornchurch, Essex. Tel: (04024) 44765

VISA & ACCESS MAIL ORDER. 24 Hour Answerphone. Open 6 Days a Week 9am-5.30pm. Rail: Liverpool St./Hockley or District Line/Hornchurch

ALL MAJOR BRANDS STOCKED

LARGEST IN SOUTH EAST

Reg Ward & Co. Ltd. 1 Western Parade, West Street, Axminster, Devon, EX13 5NY.
Telephone: Axminster (0297) 34918 COM Yaesu KENWOOD FT1000
FT797
FEX787(2)
FEX787(2)
FEX787(2)
FEX787(3)
FY797
FT747GX
FY797
FT747GX
FT797
FT747GX
FT797
FT747GX
FT797
FT797 IC755 S IC7515 IC7515 IC7515 IC7515 IC7515 IC725 2499.00 | 10.001 | 979.00 | 10.001 | 979.00 | 10.001 | 979.00 | 10.001 | 979.00 | 10.001 | 979.00 | 10.001 | 979.00 | 10.001 | 989.00 | 10.001 | 989.00 | 10.001 | 989.00 | 10.001 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 979.00 | 97 All Band ATU/Power Meter
Matching Power Supply
Matching Speaker
10/180 ZaW Linear
Zhor H-Held
Toom H-Held
Zhor H-H
Zhor H-Held
Zhor H-H
Zhor H
Zhor H-H
Zhor H
Zhor Charger Pack 8.4V (2/4E/02/04E) Battery Case (2/4E/02/04E) Pack 10.8V harge Lead BP3/7/8 ad Battery Pack (23/73) trger (23/73) trger (23/73) 13A Plug trger (23/73) te Charger (23/73) Adapt Charger (23/73) Adapt Charger (23/73) Speaker/Mic Headset Inc PTT/Vox unit IC32 + BP3 IC32 + BP5 1.3kµ/600µ BP Base Mic 150kHz-1300MHz RX Adapt Charger (23/73) ker Mic ker Mic Miniature (23/73/727) 50MHz Scanning RX Ir Supply for 9600 Power Sups.
Charger
Car Adaptor/Charger
Speaker Mike SWR/PWR Meters C W Keyers Speaker Mike HF Receiver Converter 118-175 for above RX ATU HANSEN JD110 017/8 Yaesu Y56 Yaesu Y55 Cornet CM Hand 600 Bpin mic Deak 600 Bpin mic Boom

Antennas

BARCLAYCARI V/SA

70-700MHz Discone
26-1300MHz Discone
183 Mkill 3e HF Triberder
CD318 JR 4e HF Triberder
CD319 4e HF Triberder
CJ319 4e HF Triberder
Z/70cm Mobile
Zm/70cm Baue Fibre Gless
Z/70cm Duplexer
Zm/70cm Duplexer
Zm/70cm Duplexer
Sm/70cm Baue Fibre Gless
10/80m trapped dipole 24,95 |4.00 75.00 |4.00 348,45 |8.00 399.00 |8.00 349.00 |8.00 39.95 |3.00 76.80 |8.00 25.50 |3.50 99.95 |5.00 49.00 |6.50

OPEN TUES.-SAT. 9.00-5.30 (CLOSED MONDAYS) LUNCH 1-2pm

(6.00) (6.00) (6.00) (6.00) (6.00) (6.00) (6.00)

SMCS 2U SMCS 2N Comet CSW20 T25 T100 T100 WAI PK232 Detong D70 Detong FL2 Detong FL3 Detong ASP Detong ASP Detong ASP

DELIVERY/INSURANCE IN BRACKETS (E&OE)

18.95 (4.00)
23.50 (4.00)
25.95 (4.00)
11.25 (3.00)
65.00 (3.00)
65.00 (3.00)
64.95 (4.00)
98.95 (4.00)
149.95 (4.00)
94.95 (4.00)
94.95 (4.00)
97.95 (4.00)

Miscellaneous

## WE LANDS AT HEATHR


Rotators -

We have now opened our latest retail outlet just off the M4 motorway near Heathrow. As well as the full range of Kenwood amateur radio equipment, we are also stocking all the other well known brands so that you can compare them side by side. Add to this the AOR Scanner Range, marine, commercial and air band radios plus an extensive and ever-changing selection of fully tested and guaranteed second hand equipment and you have the best one-stop centre for all your communications needs in the most accessible location in the South East.

The manager is Steve Woods, G1AGT and he looks forward to giving you a warm welcome when you pay him a visit.



**TS-850S** 



#### HOW TO FIND US

The new Lowe centre at Heathrow is located just 50 feet from the main A4, 200 yards from the M4 access roundabout at junction 5. Leave the M4 at junction 5 and take the A4 from the roundabout towards Heathrow Airport and London. After about 200 yards you will see a gap in the brick wall on the left hand side. We are directly through the gap - next door to a fish and chip shop if you are feeling hungry! You can either pull up on the grass verge and walk through the gap or, alternatively, carry on another 300 yards, turn left at the lights into Sutton Lane, take the second left into Trent Road, go to the end and it is on the left. Plenty of parking and not a yellow line in sight!

## E ELECTRONICS LTI

6 CHERWELL CLOSE, LANGLEY, SLOUGH, BERKS SL3 8XB. Tel: 0753 45255

# **Keylines**


It's about this time of year that most of us begin to think about holidays. The main rally 'season' is rapidly approaching and I've no doubt that some of you are trying to balance the family holiday with you attending a favourite event.

#### Friedrichshafen Hamfest

For many of us, rallies are the main source of 'bits and pieces'. For others, it's the chance to meet old friends and make new ones.

Some rallies offer you the chance to 'break new ground' by exploring a part of the UK you've never seen before. Occasionally there's a chance to attend an event on the European 'mainland'.

Such an opportunity comes at the end of June, when it's time once again for the marvellous Friedrichshafen Hamfest in Germany. Members of the PW team have been before of course, but for the first time readers may be able to

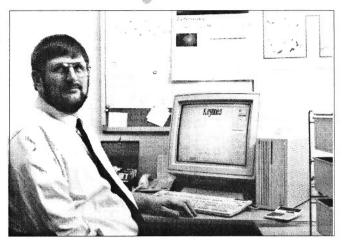

join us on a special luxury trip straight to the show, while letting someone else do the driving!

#### Largest European Rally

The show - the largest in Europe - takes place over the last weekend in June, on

28, 29 and 30th. The venue is at the German equivalent of the Birmingham N.E.C., the Friedrichshafen Messe, which is set alongside the beautiful Lake Constance, or Bodensee as it's known to the German people.

The PW party's luxury double-decker coach, fully equipped with reclining

seats, video, tea and coffee and other 'vital' necessities, will depart from the south coast on the Friday and return late on Sunday evening. On the way to the Ramsgate ferry the coach will 'pick up' in London - so readers from the north won't have to come too far south to join us.

It's a long trip, but we'll have all day at the show (the 'Flea Market' alone is the size of the Leicester show!) before an overnight trip home. There's no need to worry about language problems - because we'll have German speakers on board and most people at the show seem to be delighted to practice their English!

The cost of the trip will be based around the £100 mark. If you're interested, write to the PW office in Poole, marking the envelope 'Friedrichshafen '91 Trip', enclosing an s.a.e., for further details. You're also welcome to 'phone me at the office to talk about the trip but please try to avoid lunchtimes! Don't forget to let us know if you're interested, as each luxury double-deck coach only seats 71 passengers, and we don't want to disappoint anyone!

73s DE Rob Mannion G3XFD

# Receiving You...

#### \*\*\*\* STAR LETTER \*\*\*\*

#### Dear Sir

I was both happy and • sad to read in 'Keylines' ssue with J M Dunnett's (PW February) that an comments on the overseas company has • reunification of the two once again taken the ini- German states tiative in running an RAE ('Backscatter', PW course. I wish them every February 91). success. But is it not a sad . reflection on what we have • Practical Wireless is not seen happening over the really the place to voice past thirty years when, political opinions; apart from a few dedicated, • however, having allowed companies, the majority of go to print I hope that UK amateurs and enthusi-you will now allow me asts have had to rely almost a state the facts! entirely on overseas • manufacturers in supplying • completely wrong their needs?

R. Williams Deddington

#### Dear Sir

I feel I must take

A magazine such as enterprising British-owned • Mr Dunnett's opinions to you will now allow me to

> Mr Dunnett is not legally, the new united • Germany is the same · political entity as the old West Germany. How

ever, there is no question of a West German take-over. It was the decision of the freely-elected government of the German Democratic Republic that the GDR should be dissolved and its territory become part of the Federal Republic of Germany. It was one of the main points of the Christian Democrats' election manifesto that. if elected, they would make an early application for the GDR to join the Federal Republic, and it is believed that their landslide victory was won largely on that

particular issue.

It is probably true that quite a few East Germans were in two minds about joining the Federal Republic, and now that reunification has taken place many more are having second thoughts about it all. Even many West Germans now feel that everything happened rather too soon, and that the two populations should have been given more time to grow into one people.

The problem was, of course, that the GDR economy was on the point of collapse, and

joining West Germany was seen by most people as the only way to stop the country from going bankrupt. Many financially-troubled businesses saved themselves from bankruptcy by voluntarily selling out to larger companies; the East German government was following the same lines when it decided to hand over the country and its troubled economy to the rich neighbours in the West.

Angelika Voss GOCCI Manningtree Essex

# Receiving You...

#### Dear Sir

I have recently joined The 'Worked All Britain Group' (WAB) which I find very interesting. It certainly improves your geography! But I have noticed that quite a few amateurs don't know their square.

Would it be possible for the WAB square to be included in the RSGB Amateur Radio Callbook, possibly bracketed to avoid confusion with the postal code?

It would be a simple and easy task to find the callsign in the Amateur Radio Callbook with the WAB reference immediately alongside. I could have sent this letter to the RSGB, but thought it would be more effective if first published in PWs 'Receiving You'. Besides, they wouldn't give me a voucher for £10 or £5 on publication!

Despite the increasing number of 'Details withheld' in the Callbook-the WAB reference would give little other information away. I can also say that no one has yet declined to give me their county or rateable district when I've asked. John Harris GWOMOW Mid Glamorgan South Wales

Editor's reply: John Harris has a good point here. Personally I can't see any objection to having a WAB reference following a callsign in the Callbook. In fact, it would serve two purposes in the (ever increasing) 'Details withheld' category. Anyone working a 'Details withheld' station would have a good idea where the other station was. without compromising their requested privacy and WAB enthusiasts would also benefit at the same time.

Send your letters to the Editorial Offices in Poole, the address is on our contents page. Writer of the Star Letter each month will receive a voucher worth £10 to spend on items from our PCB or Book Services, or on *PW* back numbers, binders, reprints or computer program cassettes. And there's a £5 voucher for every other letter published.

Letters must be original, and not duplicated to any other magazines. We reserve the right to edit or shorten any letter. Brief letters may be filed via our Prestel Mailbox number 202671191. The views expressed in letters are not necessarily those of *Practical Wireless*.

#### Dear Sir

Well, well! It appears that h.f. packet types have finally decided all is not well with mail forwarding, etc., on the h.f. bands ('Packet Panorama', February 1991). Is it too much to hope for that the v.h.f./u.h.f. packet devotees will, one day, decide a similar situation exists on the v.h.f. and u.h.f. bands?

I've got a comparison which may amuse readers. I compare the expenditure in time and money on mailbox facilities and software to a Porsche car.

Unfortunately, the present communications network (the actual data links of various sorts) is equivalent to a ploughed field. I have to smile (more like a sickly grin) at the packet equivalent of two oxen pulling a Porsche across a ploughed field.

The sad part of the comparison is that the car's passengers think it's wonderful. None of them appears to have the slightest notion to put petrol in the thing and build a decent road. But then, roads are built by national bodies and we haven't got a national packet body have we?

Phil Cadman G4JCP, Dudley, West Midlands

#### Dear Sir

The postman dropped February's 'Camm's Comic' on the mat this morning. As usual I read with interest the 'Keylines' editorial by Rob Mannion G3XFD. I've been monitoring the new format and contents from the time of the 'new look'. Firstly I should say that I have been a reader since the days of the great 'F.J'. when I was about eight years old in 1932

Since the 'new look' PW started, whilst I don't agree with everything published in the magazine, PW has to cater for the varied tastes of its many thousands of readers. The fresh approach by the Editor now 'in the chair' may not please everyone, but I feel that we must all support his actions and in particular his support for the hobby of amateur radio and the RSGB.

Again, the RSGB cannot please all shades

and opinions - try as they might. Despite this, the Society must have the support of all radio amateurs and all short wave listeners even if you don't agree with all that they do. You cannot change things from the 'outside'. Think again about your subscription. Look at the cost of your radio gear - you'll see that in percentage terms, the RSGB 'sub' is a very small fraction of the cost of your station and participation in amateur radio.

To those people who are working publicly to support amateur radio I urge them to keep up the good work. To those on the 'side lines', I ask that they put their hands in their pockets to support the hobby. You can't take it with you, but at least you'll have the satisfaction of helping amateur radio survive and supporting amateurs of the future.

Dennis K. Egan GW4XKE Dinas Powis South Glamorgan

#### Dear Sir

One of the great pleasures that I and most amateurs have in common once outside of the shack, is visiting Rallies, either locally or at some distant locality.

For me this activity is no longer the pleasure it used to be. Mainly because that in the past year I've been the victim of many accidents at these rallies. I've suffered bruises to both my knees, ankles, thighs and insteps.

Most bruises have unfortunately come from prams and pushchairs. These were being used by XYLs as a means to force a passage through the crush. Another big problem is that of children running about unsupervised.

Some of the blame can, and should be, laid at the feet of the rally organiser. They try to 'cram' the maximum number of stalls into the smallest area. Some blame can also be laid at the door of people who block gangways unnecessarily.

Although I realise such occasions are a good family 'day out', why do people take a baby or very small children into the crowded rallies?

Another big problem is that caused by people smoking - despite 'No Smoking' notices and the fact that ventilation is often poor. Top this off with the chance of being stabbed in the eye with a whip antenna from a handheld rig and you've got an obstacle course which can deter anyone but the keenest and fittest!

J. D. Bolton G4XPP Crook County Durham

Editor's comments: Mir Bolton's letter (shortened for publication) has some important comments. To take his last point first I have never understood why the 'No Smoking' rules are not enforced. To be in a very crowded, hot rally hall and to have burning cigarette ends pushed into your face or clothing (as the person struggles by) is unpleasant to say the least.

However, I can sympathise with family groups and their problems at rallies. I've noticed recently that more people carry 'the junior operator' in special 'back-packs'. Perhaps the answer should be better 'family facilities' at rallies? Many rally organisers really do try their best to help in this way, but we rarely hear about their problems. Now the time's arrived - come on rally organisers - let's hear your point of view in 'Receiving You'!

#### Dear Sir

I have been a reader of PW since 1954, in the days of the great F. J. Camm; and I still enjoy reading many of the articles in those 1950s PWs.

I also enjoyed reading the series 'Crops and Coils' during the late 1980s, but found that series sadly lacking in circuit diagrams. The series 'Valve Communications Receivers' was also interesting, and kept me buying *PW*.

There is a small but growing group of amateurs - myself included - who build vintage circuits. My

## **Competition Corner**





transmitters, etc. If amateur radio is to survive, it has to encour-

Circle the 12 differences, fill in the form below and send your entry to **PW Publishing** Ltd., April 1991 Spot The Difference Competition, Enefco House, The Quay, Poole, Dorset BH15 1PP. **Photocopied** entries must be accompanied by the corner flash at the foot of this page.

Closing Date 26 April 1991. The Editor's decision on the winner is final, no correspondence will be entered into. First prize winner can choose either a one year PW subscription or £20 in vouchers for the book service. The two runnersup can choose from either a six month PW subscription or £10 in book vouchers.

Subscription

Subscription

Vouchers (please specify)

50MHz transmitter is a modified 1950 circuit, with a pair of 807s in the final, driven by a VT501 Doubler from a 6AG7 crystal oscillator.

My 50MHz converter has four r.f. stages (three CV66 in grounded-grid mode and one EF50 Pentode stage), with a Triode mixer. When I get my full ticket, my h.f. transmitter will have valves from my 800 series collection, probably an 802 and an 803. The 700V, 350 mA power supply will use a pair of 866A rectifiers, also in keeping with its period.

In the USA, 1929 CQ

parties are a great hit, with contests for building and operating vintage equipment. The Historical Radio Society of Australia is setting up a vintage amateur h.f. net.

So, please give us more reprints of constructional articles from the 1930s, 1940s and 1950s. The reprint of the May 1955 'Cigar Box Receiver' in your 1000th issue was particularly welcome. But please give us more!

It's very encouraging to read letters like the one from a 17-year old enthusiast calling for more published articles on simple valve a.m. transmitters, etc. If amateur radio is to survive, it has to encourage younger people to join its ranks. What better way is there, than by publication of simple constructional projects that provide hands-on experience, - Practical Wireless, if you like!

It's a learning experience that they'll never get from a Japanese 'Black Box'. After all, that's how it all began

I wish Practical Wireless every success in the 1990s, but do please give us, your readers, more historical constructional articles and articles around simple valve circuits.

T. F. Pool VK7YAI Tasmania Australia

Editor's reply: We're receiving you Mr. Pool! The PW team hope you like this month's valved project for 3.5MHz. While not forgetting modern techniques, we're aiming to cater for the many 'thermionic' types amongst our readers. I'm sure you'll also find our next valve project (for 50 and 70Mz) of interest!

### Services

#### Queries

We will always try to help readers having difficulties with a *Practical Wireless* project, but please note the following simple rules:

We cannot give advice on modifications to our designs, nor on commercial radio, TV or electronic equipment.

2: We cannot deal with technical queries over the telephone.

 All letters asking for advice must be accompanied by a stamped, self-addressed envelope (or envelope plus IRCs for overseas readers).

4: Make sure you describe the query adequately.

5: Only one query per letter please.

#### **Back Numbers & Binders**

Limited stocks of many issues of *PW* for the past years are available at £1.65 each including post and packing.

Binders, each holding one volume of PW, are available price £4.50 each (£1 P&P for one, £2 for two or more).

Send all orders to the Post Sales Department.

#### Subscriptions

Subscriptions are available both for the UK and overseas. Please see current issues for the latest prices.

#### **Constructional Projects**

Each constructional project is given a rating to guide readers as to its complexity.

Beginner: A project that can be tackled by a beginner who is able to identify components and handle a soldering iron fairly competently.

Intermediate: A fair degree of experience in building electronic or radio projects is assumed, but only basic test equipment is needed to complete any tests and adjustments.

Advanced: A project likely to appeal to an experienced constructor and often requiring access to workshop facilities and test equipment for construction, testing and alignment. Definitely not recommended for a beginner to tackle on their own.

Components for our projects are usually available from advertisers. For more difficult items a source will be suggested in the article. Kits for many of our recent projects are available from CPL Electronics and FJP KITS, both of who advertise in the magazine. The printed circuit boards are available, mail order, from the Post

#### Mail Order

Sales Department.

All PW services are available Mail Order, either by post or using the 24hr Mail Order Hotline (0202) 665524. Payment should be by cheque (overseas orders must be drawn on a London Clearing Bank), Access, Mastercard or Visa please.

#### Wireless Line

This is an information service for the radio enthusiast, updated each Friday. Calls cost 44p per minute peak time and 33p per minute offpeak. The number to ring is: (0898) 654632.

#### **International Marconi Day 1991**

Cornwall ARC - GX4CRC - presents International Marconi Day 1991. This year the event will be held on Saturday 27 April and will run from 00.01z through 23.59z - a 24-hour event. The stations taking part in this year's programme are listed below. As in previous years, all stations have a particular Marconi connection, or are being worked from sites used by Marconi and his associates when those early transmissions were made many years ago. The stations are as follows:

NT		
Δ	NICO	esk
110	VOU	COV
	111	
	'41	

K1VV/IMD	Cape Cod.
VE1IMD	Nova Scotia.

VO1IMD St. Johns, Newfoundland.

EI2IMD Eire.

IY4FGM This is the official Marconi club station in Italy.

GB0IMD From the Packpool Park Wireless Museum on the Isle of

Wight

GB4IMD At Perranwell, a little way South-west of the city of Truro.

GB2IMD Near Rathlin Island in Ireland.

IYOTCI In Civitavecchia.

IY1TTM From the Tigullio Tower. The location of the tower is at

Sestri Levante on the Italian Riviera, near Genoa.

ZS6IMD This station is representing the South African influence of

Marconi.

DA0IMD On Borkum Island off the North German coast.

GB2MDI From the Salisbury area.

GB4MDI From Flatholm island in the Bristol channel.

In the event last year, 51 stations qualified for the special award by working the required number of Marconi stations which were then operating, and in addition, 16 short wave listeners also successfully applied for the award.

This year there are 14 special event stations, and to qualify for the Marconi award it will be necessary to work any 10 of these 14 stations. As before, QSL cards can be exchanged via the Bureaux, or if preferred, directly (if possible with stamps or a small donation towards postage costs) to:

#### CRAC (or IMD), PO Box 100, Truro, Cornwall TR1 1RX.

All the official award claims must be made via their PO Box and accompanied by either \$5(US) or £2.00(UK) or 10IRCs. The official award is for two full days working only, but again this year they are offering an award for short wave listeners. Applications for this award will also be via the PO Box. Claimants will have to record at least 10 of the Marconi Day stations, together with the times heard and the other stations being worked. The s.w.l. award will cost \$3 or £1.50(UK) or 6IRCs.

Where to find them? They are pleased to announce that they will be working any or all modes, on all bands from 3.5MHz to 50MHz (and locally on 144MHz).

For any further information, please write to:

CRAC, PO Box 100, Truro, Cornwall TR1 1RX.



PHOTO. MARCONI COMPANY LTD.

#### **WAB Activity**

The OSCAR VICTOR Activity Group (WAB) invites you to the 5th Annual Family Fun Weekend at Bent Riggs Farm, Ravenscar, North Yorkshire in August.

Due to the increasing success of their Bank Holiday Fun Weekend, WAB extend the hand of friendship to other amateur radio-related Groups and Societies by inviting them to their next venue which will be held from the 23rd to the 26th of August 1991.

As usual they will be holding their venue at Bent Riggs Farm, Ravenscar, which can be found midway between Scarborough and Whitby on the beautiful North Yorkshire coastline. The Cleveland Walk passes close by to their site.

As they have a field exclusively for their own use, the Oscar Victor Group also welcome Campers and Caravanners. There's also a 'Bunk Barn' for those of you wishing to have a roof over your head.

During the weekend you have the chance of working either h.f. or v.h.f. pile-ups from the infamous Oscar Victor Square, or perhaps working DX from the control station on site. It's a truly family occasion, and if you wish to enjoy the scenery, the area affords many colourful and interesting walks.

Your evenings on site are spent in the company of other hobbyists where the Barbeque compliments the conversation and the liquid refreshments which are readily available.

Further attractions include a Car Boot Sale with the chance to turn your unwanted equipment into cash, sporting activities arranged for the children and child-minding facilities are available during the weekend.

It really is a fun weekend, in an informal atmosphere with or without the radio and a very enjoyable time can be had by all.

Cost for use of site irrespective of caravan or tent size, (including Barbeque)

Adults and over 14s £2.50 per day.

OAPs and under 14s free.

Further details can be obtained from either:

Peter Austin G7BXA

Tel: (0532) 563462.

Steve G1SGB QTHR

Tel: (0709) 543747.



#### Sherwood Forest Award

Mansfield ARS are launching the Sherwood Forest Award with a brand new, and stylish certificate.

The Sherwood Forest Award is available to all licensed radio amateurs (on a QSO basis) and short wave listeners (on a heard basis) who have worked/heard licensed radio amateurs in the County of Nottinghamshire.

The award is worked on a points system and to claim the certificate a minimum of 30 points must be collected. They are awarded as follows:

5 points for working/ hearing the Mansfield ARS club callsigns of G3GQC or G1GQC.

2 points for working/ hearing any member of the Mansfield ARS.

1 point for working/ hearing any other licensed radio amateur in the County of Nottinghamshire.

All permitted bands and modes may be worked.

Each station may be entered into the log only once per claim, irrespective of band or mode.

There is no time limit for starting and finishing the award.

A list of the current members of the Mansfield ARS and their callsigns may be obtained by sending an s.a.e. to the Awards Manager.

A copy of your log entries recording QSOs with stations in the County of Nottinghamshire, should be certified by two other licensed amateurs and sent to the Awards Manager of Mansfield ARS along with a fee of £2, \$4 or 7IRCs.

All claims and queries should be sent to:

G. W. Lowe G0NRA
Mansfield ARS Awards
Manager
25 Manor House Court
Kirkby-in-Ashfield
Nottinghamshire
NG17 8LH.

## Newsdesk '91

#### Centre of England Rallies

Because of its huge success in such a short space of time, attracting visitors from all over the county, and from far away as Ireland, the Centre of England Rallies have become major events. The venue, the British Motorcycle Museum, Bickenhill, close to the NEC, has proved extremely popular because of its easy access by road, and ample parking facilities. Visitors can spend a few hours at the rally, then browse around the museum which houses over 500 motorcycles.

The Rallies, have been held twice yearly. There's

been one on Easter Sunday, which this year falls on March 31, and an Autumn rally held in September.

However, because of its popularity, traders and visitors alike asked if the committee would organise a Christmas Rally as well, and this is planned for late December.

To add colour to the Easter Rally, the traders have decided to have a competition amongst themselves to see who can come up with the most outrageous and funniest Easter hat. So be warned visitors - you could see some very odd creations walking about! There's plenty of fun for everyone with talk-in available on S22.

#### **Four More Languages**

BBC World Service broadcasts in four languages, including Turkish, have recently been increased as a further response to the Gulf War.

The increases came on top of extra daily Arabic and Persian language transmissions. Now BBC broadcasts in Turkish increase by 15 minutes a day. Hindi, Urdu and Bengali all get an extra ten minutes to make up a daily half-hour programme. This special trilingual Gulf War broadcast will be audible at lunchtime in the Gulf, late afternoon in the Indian Subcontinent.

Changes in weekly hours are as follows:

Turkish Up from 12 hours to 13 hours 45 mins.
Hindi Up from 14 hours to 15 hours 10 mins.
Bengali Up from 9 hours 15 mins to 10 hours
25 mins.

Urdu Up from 10 hours to 11 hours 10 mins. The recent increases took BBC output in Arabic to 98 hours a week (up from 63 hours before Iraq's invasion of Kuwait) and Persian to 14 hours (up from 12 hours 15 mins). All the increases, agreed by the Foreign & Commonwealth Office, will continue until further notice.

The BBC World Service in English, which has been keeping its transmitters serving the Gulf, on the air around the clock since last August, continues to provide a special schedule in response to the Gulf War. Longer news bulletins are being carried on the hour every hour with additional news summaries wherever possible at 30 and 45 minutes past the hour. Detailed news and analysis is broadcast in special Gulf programmes three times a day.

The BBC engineers report that World Service is still free of Iraqi jamming in all the languages it broadcasts, including Arabic.

#### Club News

Midland ARS meet at 7.30pm, Unit 22, 60 Regent Place, off Caroline Street, Birmingham. On March 19, they have Kites & Aerials by Norman Parker G4VMP. For any queries, please contact John Crane G0LAI at 194 Brays Road, Sheldon, Birmingham B26 2PP. Tel: 021-742 8712

Derby & District ARS meet Wednesdays, 7.30pm at 119 Green Lane, Derby. March 20 is their AGM, the 27th is Using Oscilloscopes, an illustrated talk by Rex Beastall G1LRI, April 3 is a Junk Sale and the 10th is a Night on the Air. Further information about the Society is available from Richard Buckby G3VGW, 20 Eden Bank, Ambergate, Derby DE52GG. Tel: (0773) 852475.

Poole RAS meet last Fridays of the month, 7pm at Russell-Cotes House, Lower Constitution Hill Site, Bournemouth & Poole College of FE. April 26 is their AGM. Further details from Vernon Cotton G3BCI, 45 Branksome Hill Road, Bournemouth BH4 9LF. Tel: (0202) 760231.

Spalding & District ARS meet 1st Fridays of the month, 7.30pm at The Ship Albion, Albion Street, Spalding Details from Tom Simpson G3NSF, 184 Boston Road, Holbeach, Spalding, Lines. Tel: (0406) 24523.

Preston ARS meet Thursdays, at The Lonsdale Sports & Social Club, Fulwood Hall Lane, Fulwood, Preston. March 21 is Preston Kaleidoscope, an illustrated talk by Mrs Crossley and April 4 is The Ribble Valley, an illustrated talk by Mr Green. Details from Eric Eastwood G1WCQ, 56 The Mede, Freckleton, Preston, Lancs PR4 1JB. Tel: (0772) 686708.

Horsham ARC meet at the Guide Hall, Denne Road, Horsham, West Sussex. They have a talk on Navigation Beams (WW2) on April 4. For further details, contact Peter Stephens G8SUI, at 11 Nutwood Avenue, Brockham, Betchworth, Surrey RH3 7LT. Tel: 073784 2150.

Bury St. Edmunds ARS have a change of venue for 1991, they now meet at the West Suffolk College, (Room EO-40), Out Risbygate, Bury St. Edmunds, on the 3rd Tuesday of each month, at 7.30pm. Further details about the club from lan Capon GOKRL, on (0359) 70527.

Three Counties RC meet every other Wednesday, 7.30pm at the Railway Hotel, Liphook, Hampshire. March 27 is Army Radio Equipment and Operation and April 10 is IsoLoop HF Antenna. For further details contact Dave G4VKC, 39 The Maltings, Liphook, Hants GU30 7DG.

#### Latest Component Catalogue

New from the Vintage Wireless Company - their latest Vintage Audio & Radio Component Catalogue, priced at £1.50 post paid (UK and Eire), £1.95 post paid Surface (overseas) and £4.50 Airmail post paid (overseas).

Their 67 A4-page catalogue is packed full of every conceivable vintage component, including grid leaks, transformers, accumulators, coils, jones plugs for R1155, h.t. batteries (UK's only source!), h.t. capacitors, headphones, pick-ups, capacitors, resistors, tuning capacitors, loudspeaker silks, volume controls, cloth covered cables, control knobs & dials, sleeving, cabinet transfers, output transformers. terminals, crystal set parts, mains transformers, intervalve transformers, rheostats, dials, etc.

Also available, free of charge, is their Valve Catalogue, 1991 Audio Catalogue and 1991 Books & Data Catalogue (includes WD data listing!).

The Vintage Wireless Company Ltd. Tudor House Cossham Street Mangotsfield Bristol BS17 3EN. Tel: (0272) 565472.

#### Lee Electronics

We apologise to Lee Electronics of 400 Edgware Road London W2, Tel: 071-723-5521, for the mistake in their advertisement on page 24 of the March issue of PW

Unfortunately, we inadvertently printed a photograph showing an older transceiver rather than their new C5608 dual-band 144/430MHz mobile transceiver.

#### **Moving Premises**

Elliott Electronics are moving to a new shop mid-March. Any reader who intends to visit them, should first contact them by phone.

Elliott Electronics Tel: (0533) 553293.

#### **FJP Kits**

Mr Powell of FJP Kits recently sent us a copy of their current catalogue. To keep costs down this has been photocopied, but at a cost of 50p it contains many useful items needed to build *PW* projects. Mr Powell is also willing, for a small charge, to build any *PW* project if you don't feel up to it yourself.

Newsdesk

FJP Kits 63 Princess Street Chadsmoor Cannock Staffs WS11 2JT. Tel: (0543) 506487.



#### SG-2000 Introduced

SGC Inc., a well-known communications design and manufacturing company has introduced the Model SG-2000 high frequency single-sideband radiotelephone. This full coverage s.s.b. radio provides h.f. communications on voice and data transmission. The SG-2000 features several sophisticated scanning modes, a large l.c.d. frequency display and is remote and ARQ/FEC ready. The SG-2000 features a splash-proof front panel and includes an internal clock with turn on/off programming and 616 ITU voice and data channels, plus 100 user programmable memory channels.

The Model SG-2000 is a professional h.f. s.s.b. transceiver and incorporates unique features which appeal to the commercial, industrial and pleasure markets. The SG-2000 produces 150 watts, and operates on the 1.8 to 30MHz frequency bands. The unit has all functions builtin for h.f. s.s.b. operation, including remote capability (up to six remote stations) or remote controlled through telephone lines. The SG-2000 can be controlled, by an IBM or compatible computer, without its removable front panel.

Designed as a product for the 90s, the SG-2000 will operate on any marine, commercial and ham frequencies and will have receive capabilities for broadcast and weatherfax frequencies.

The SG-2000 will retail for \$1995.00. Additional remote heads are \$595.00 each.

SGC is a leading manufacturer and supplier of high frequency single-sideband communications products and related accessories. Over the last 20 years the company has gained an excellent reputation for the performance and reliability of their h.f. s.s.b. equipment. SGC produces a full range of marine and aviation equipment as well as antenna couplers and antennas. SGC also publishes a comprehensive *HF-SSB Latest Factbook*, which is available at \$11.95.

For additional information about the SG-2000 or any SGC products, contact:

SGC Inc.

Sales and Marketing Department SGC Building 13737 S.E. 26th St. Bellevue WA. 98005, USA. Tel: (206) 746-6310.

#### **PW German Weekend**

Would you like to join the *PW* weekend to Friedrichshafen in July? You can join us as we travel by luxury double-decker coach to the biggest radio rally in Europe. See the 'Keylines' page for further details.


#### MCS500 Mobile Control Station

This unit is designed to mount in the car to provide a control and test console for the CB radio. The unit has the following functions:

\*Automatic s.w.r. measurement \*Power meter (up to 500W) \*FM deviation meter (built-in) \*Antenna preamplifier \*Remote control switching for ancillary equipment.

It will retail at £99 and should prove popular with the CB radio enthusiast who thought he had everything!

Nevada, 189 London Road, North End, Portsmouth, Hants PO2 9AE.

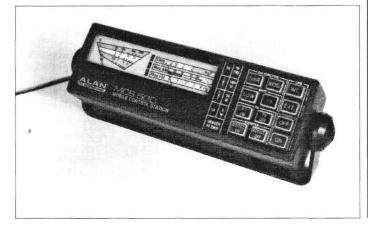

## Newsdesk '91

## 

#### **Auction - Change of Date**

Thousands of items must go at the 'Fools for a Day' auction held by Alton Communication Engineers Ltd., and Communication Development Specialists Ltd.

Due to moving premises all stock must be cleared at ridiculous prices.

Join the spirit of things and visit their auction on 2 April 1991, the day after 'April Fools Day' (the only joke is the prices!)

Viewing: Monday 1 April 12-4pm

Tuesday 2 April 9-10am

To be held at Herriard Village Hall, Herriard, Nr Basingstoke (off the A339). Auction begins 10am. Bar and refreshments available.

Stock to include: two-way radio equipment, (new and used), masts, towers, power supplies, tone signalling equipment, test equipment, tools, furniture and office equipment.

For a list of products please telephone (0256) 83528/83277 or send a stamped addressed envelope to:

Unit 4, Summerlea Court Southrope Herriard Basingstoke Hampshire RG25 2PX.

#### **60th Birthday Prize**

In honour of 60 years of ministry, radio station HCJB is inviting listeners to visit them in Quito, Ecuador.

Two lucky listeners will be able to do this free!

When you write to HCJB, Box 691, Quito, Ecuador, just include the words, "Happy 60th Birthday".

Those words will make you eligible for a draw to be broadcast on Christmas day 1991, the 60th anniversary of HCJB.

Two letters or cards, with those words on them, will be drawn. Each person will receive a free round trip to Quito, from the country where they mailed the card, and will be their guest at HCJB for one week. If one of the winners is from their host country of Ecuador, then that person will be allowed to bring a guest

with them, at their expense, for a week at HCJB.

Members and employees of HCJB World Radio, or their immediate family members are not eligible.

Just send your birthday greetings to HCJB, Box 691, Quito, Ecuado.

All entries become the property of HCJB. The winners will be announced on Christmas day 1991 and will also be contacted by post.

All are invited to be a part of this 60th anniversary of HCJB. Remember to include the words, "Happy 60th Birthday" when you write to them in Quito. All entries must be mailed to Ecuador. They will not be received at any of their other offices.

They hope to see you in Quito!

#### The Dundee 800 Certificate

This award has been designed as one of the many activities celebrating the 800th anniversary of the granting of the Royal Charter to the City of Dundee. The award is sponsored by the Dundee Amateur Radio Club which is celebrating its 21st anniversary during the year, and it will be available for contacts made at any time during the year 1991.

#### RULES FOR THE CERTIFICATE

- The certificate will be available to all licensed radio amateurs and, with an s.w.l
  endorsement, to all interested short wave listeners.
- A contact with a club member on one amateur band (no WARC bands) will count
  as one contact point. A club member may be worked on more than one band
  for extra points.
- 3. The qualifying requirements are:
  - a. Stations outside Europe must obtain two contact points.
  - b. Stations in Europe, but outside the UK, must obtain four points.
  - Stations in the UK must obtain eight contact points and must include at least three club members.
- 4. The cost of the certificate is \$2.00 US or £1 sterling.
- 5. The applicant must list for each contact the following information:
  - a. Date of QSO
  - b. Callsign of the station contacted.
  - c. Frequency band used.
  - d. Signal reports sent and received.
- 6. Enquiries and applications should be sent to the certificate Manager:

W. S. Hall GM2AOL, 21 Seabourne Gardens, Monifieth Road, Broughty Ferry, Dundee, Scotland DD5 2RT.

#### **Broadcasts to New Zealand**

The BBC World Service is now being rebroadcast around the clock in New Zealand's largest city. The rebroadcasts on f.m. have been brought forward in response to the Gulf Crisis.

Until recently, BBC World Service could only be heard by New Zealanders with short wave radio receivers. Now for the first time in Australasia the network has been brought within reach of anyone using a standard radio, 24 hours a day.

The service is initially on air in Auckland on 91.8MHz, a temporary frequency allocated to make the service available at this critical stage in the Gulf Crisis. The service has also begun in the capital Wellington. Later this year it will be extended nationally on a.m. or f.m. frequencies.

New Zealand company, Satellite & Terrestrial Ltd., will be carrying out the rebroadcasts. Managing Director, Ken Wikeley, says that his firm had planned to introduce the service during 1991 but that the Gulf situation led them to make the temporary broadcasting arrangements. These were accomplished in less than a week, using equipment flown out from London in the last 48 hours.

New Zealand's arrangement to rebroadcast BBC World Service live and in full is one of only a small number in the world. A similar scheme in Singapore attracts an audience of 9.6% of all adults, or 200 000 people. BBC World Service has a regular audience of 120 million worldwide, more than any other international broadcaster, the great majority listening on short wave.

## **DEWSBURY**



## **ELECTRONICS**







## SUPA -TUTA PLUS

The complete solution to learning to send and receive The Morse Code £82.50 inc VAT Post & Packing £2.50

## SEND S.A.E. FOR DETAILS OR ORDER NOW BY PHONE.

Also available in the range: Supa - Tuta, Supa - Keya, and Supa - Tuna

FULL RANGE OF KENWOOD PRODUCTS STOCKED

We are also stockists of DAIWA — ICOM — JRC — TAR — WAVECOM — YAESU — BNOS

Dewsbury Electronics, 176 Lower High Street, Stourbridge, West Midlands DY8 1TG
Telephone: Stourbridge (0384) 390063/371228

Access

VISA

Fax: (0384) 371228

Instant finance available subject to status. Written details on request







BREDHURST ELECTRONICS LTD. High St, Handcross, W. Sx. RH17 6BW (0444) 400786

#### SITUATED AT SOUTHERN END OF M23 — EASY ACCESS TO M25 AND SOUTH LONDON

RECEIVERS	
Lowe HF225	£425
Icom ICR71	£855
Icom ICR72	£645
Kenwood R2000	£595
Kenwood VC10 V.H.F. Converter	£161
Yaesu FRG8800	£649
Yaesu FRV8800 V.H.F. Converter	£100
Kenwood R5000	£875
HE TRANSCEIVERS	

HF TRANSCEIVERS	
Kenwood TS950s	£3199
Kenwood TS940s	£1995
Kenwood TS440s	£1138
Kenwood TS140s	£862
Kenwood TS680s	£985
Kenwood TS850S	£1295
Yaesu FT767GX	£1599
Yaesu FT747GX	€549
Icom IC765	£2499
Icom IC751A	£1500
Icom IC735	£979
Icom IC725	£759
Icom IC726	€989

2M TRANSCEIVERS	
Kenwood TH27E	£249
Kenwood TH25E	£238
Kenwood TH205E	£199
Kenwood TH215E	£228
Kenwood TR751E	€599
Kenwood TM241	£289
Yaesu FT411 + FNB10	£259
Yaesu FT290R11	£429
Yaesu FT211RH	£309
Yaesu FT212RH	£349
Icom IC2GE	£265
Icom IC228H	€385
Icom IC275E Inc PSU	£1069
Icom IC2SE	£275
Icom IC2SET	£295

70CMS TRANSCEIVERS	
Kenwood TM441E	£318
Kenwood TH405E	£245
Kenwood TH415E	£268
Yaesu FT790RII	£499
Yaesu FT711RH	£349
Yaesu FT712RH	£375
Icom IC4GE	£299
Icom IC4SE	£310
Icom IC448E	£429

DUAL BAND TRANSEIVERS	
Kenwood TM731E	£665
Yaesu FT470R + FNB10	£383
Yaesu FT736R	£1359
Icom IC32E	£399
Icom IC321OE	€499
Icom IC2400E	£635
Icom IC2500E	£675
Icom IC24E	£385
Standard C528	£379

SCANNING RECEIVERS

Icom ICR7000 Yaesu FRG9600M

Signal R535 Airband Icom IC R100	£249 £499
ANTENNA TUNER UNITS	
FRT7700	£59
FC757AT	£349
AT230	£208
AT250	£366
ICAT100	£379
MFJ941D	£116
MFJ949C	£165

COAXIAL SWITCHES		P&P
SA450 2way SO239	£19.49	1.50
SA45ON 2way N	£26.99	1.50
Drae 3way SÓ239	£20.18	1.50
Drae 3way N	£26.11	1.50
C54 4way BNC	£30.39	1.50
MFJ-1701 6way SO239	£38.35	1.50

HAND HELD RECEIVERS		P&P
ICOM1CR1	£399.00	2.00
R537S Airband	£69.00	2.00
Win 108 Airband	£175.00	2.00
AOR AR1000	£249.00	2.00
Yupiteru MVT-5000	£299.00	2.00

M	ICROCRAFT'S NEW CODE SCANNER
Cop	ies Morse, Baudot and ASC II code 32 Character Display
	£179.00
_	·



€509

£465 £487 £765 NEW PRODUCTS

#### AR-1000 Handheld Scanner

★ 1000 Channels ★ 8 - 600MHz continuous 805 - 1300MHz continuous ★ AM, FM (narrow & wide)

AM, FM (narrow & wide)
Complete with NiCads
and mains charger
£249

GOODS NORMALLY DESPATCHED WITHIN 24HRS - PRICES CORRECT AT TIME OF GOING TO PRESS - E&OE

MAIL ORDER & RETAIL

ANTE	ENNA BITS		P&P
PB1	1:1 Balun 2kW P.E.P	£17.95	£2.00
LC160	160 Mtr Wire Antenna Shortener (Pair	s)£22.95	€2.00
LC80	80 Mtr Wire Antenna Shortener (Pairs	£21.95	£2.00
T15	21MHz Traps 1kW (Pairs)	£34.95	£2.00
T20	14MHz Traps 1kW (Pairs)	£34.95	£2.00
T40	7MHz Traps 1kW (Pairs)	£30.95	£2.00
T80	3.5MHz Traps 1kW (Pairs)	£34.95	£2.00
16SW0	G Hard Drawn Copper Wire (50 Mtrs)	£12.95	£2.50
Small	Ceramic Egg Insulators (each)	£0.65	£0.30
Large	Ceramic Egg Insulators (each)	£0.85	£0.40
$300\Omega$	Slotted Ribbon Cable (per mtr)	£0.58	20.10
450Ω	Slotted Ribbon Cable (per mtr)	£0.50	£0.10

PALOMAR PRODUCTS	
R-X Noise Bridge for antenna checks up to 100MHz Receiver Preamp - 1.8 to 54MHz.	£59.95
Up to 20dB gain Transceiver Preamp - R.F. Switched	£119.95
- up to 20dB gain Super Snooper - vertical indoor	£149.95
antenna for SWL Loop antenna - Directional indoor	£39.95
antenna 6 loop ranges phone for details Tuner Tuner - ATU adjustment without	
transmitting	£99.95
SWR without adjustment 20W 200W 2000W PEP 2W 20W 200W 2000W PEP expanded	£129.95
displayVLF converter - 10 - 500kHz	2189.95
converter	£79.95
1:1, 1:5, 2:1, 3:1, 4:1, 5:1, 6:1, 7.5:1, 9:1, 12:1, 16:1	
Baluns - up to 6kW PEP phone for details	

BREDHURST ELECTRONICS LTD HIGH ST, HANDCROSS, W. SUSSEX. RH17 6BW (0444) 400786

Open Mon-Fri 9am-5pm except Wed 9am-12.30pm. Sat 10am-4pm

# A Valved Transceiver For 3.5MHz

The PW editor Rob Mannion, is not the only person to like valves. I also find that they are still equal, sometimes better than transistors for the home-constructor. Spurred on by this interest, I decided to 'have a go' and build a suitable transceiver for an 'A' licenced friend to use.

The transceiver described here, is the result of 'raiding' various stalls at rallies and updating a design by T. W. Dresser, which was originally published in a 1953 issue of *PW*.

#### **Minus Points**

There are unfortunately, draw-backs with valves. They require a separate heater voltage, usually 6.3V for 'mains' powered valves or 1.4V d.c. for battery-supplied types. These voltages have to be provided from a separate supply source.

The second, and potentially hazardous, problem is that VERY HIGH VOLTAGES are present in the unit. Under certain conditions r.f. voltages of up to 1000V peak-to-peak may be present. This level of voltage and frequency can 'jump' several centimetres to 'earthed' fingers and knuckles. This is a particular hazard if you're wearing a ring. I'm speaking from experience, and I know that this type of r.f. burn can take many months to heal.

#### The Design

The transmitter design is shown in its modified state in Fig. 1. It consists of a single-valve, cathode-keyed, oscillator (V1) which can produce 3-4W of r.f. at the crystal frequency (3.550MHz). The valve, a 6V6GT, is really an audio 'beam' power amplifier, but works well at these lower frequencies as a power oscillator.

#### **Filter Network**

The necessary matching and filtering circuitry consists of C7, L4 and C8. This is the well-known



#### Construction

John Keeley
G6RAV found that
valves still
produce good
results on 3.5MHz.
His experiments
resulted in an
interesting little
transceiver that
can produce
excellent on air
results.

'pi' (π) network that allows almost any piece of wire or antenna to be used efficiently at this frequency. As valves use a much higher supply voltage than transistor output stages, the power drop-off with differing antenna systems is much less of a problem.

All capacitor used throughout must be high voltage working (300V minimum). But C6 must be of even better quality and have a high working voltage. I discovered a suitable capacitor at a rally. It had a capacitance value of 10nF with a 2.5kV working voltage. Meter M1 with R4 and D1 form the power sensing circuit to complete the transmitter.

#### The Receiver Described


The receiver is a simple three-valved regenerative design. It's not at all difficult to follow how the circuit works as each valve is in effect one 'stage'.

The valve V2, is a 6K7GT acting as an r.f. amplifier and 'buffer'. The gain of the stage is adjustable by R8. As the wiper of resistor R8 is brought closer to the junction with R7, the stage gain is reduced smoothly.

Inductors L5/6 form a broadly-tuned filter at the working frequency. The capacitor C10 may be adjusted to give greatest signal over the working band of interest.

The next valve, V3, is a 6SJ7 acting as an

Fig. 1: The circuit diagram of the transceiver.

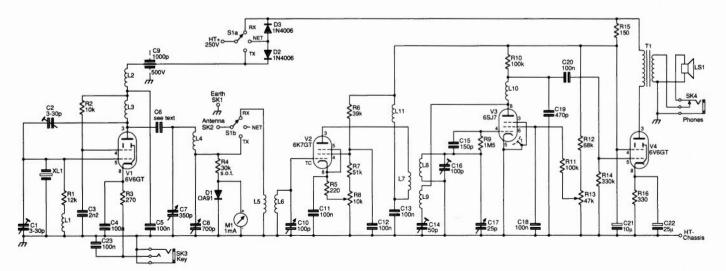

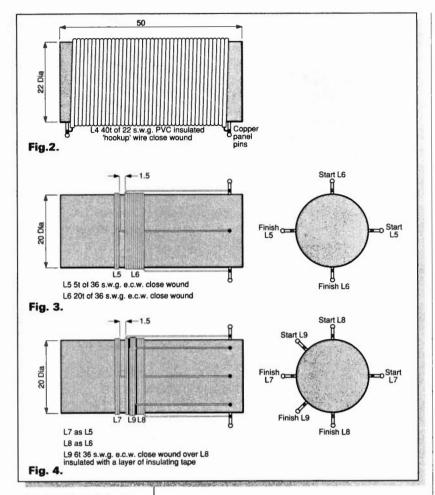


Fig. 2: This coil (L4) wound on a piece of wooden dowelling) is for the  $\pi$ -matching unit.

Fig. 3: Make two sets of coils to this design. One set, for the detector, then has an extra winding applied.(See text)

Fig. 4: Using one of the coil sets from Fig. 3, add an extra winding as shown for the detector.

oscillating detector. Positive 'feedback' (often called 'regeneration' or 'reaction') is applied via winding L9. The amount of 'feedback' may be adjusted by using trimmer capacitor C14, in combination with the 'reaction' control R13.

The standing current of this valve is kept very low, due mainly to the very high anode load of L10 and R10. Signals at radio frequency are developed across L10 and fed back to the input tuned circuit L8/C16 and 17.

The varying r.f. signals cause an a.f. signal to be developed across R10. This is then amplified in V4, the audio stage.

#### **Final Stage**

Audio amplification is carried out by V4, a second 6V6GT, operating this time in its more 'normal' a.f. mode. This stage has C22, the only low voltage capacitor in the circuit. The component acts as an audio-frequency 'bypass' capacitor for the cathode resistor of V4.

The receiver audio output is normally to headphones, but a small loudspeaker may be used for strong local signals if you prefer it as an alternative.

#### Construction

This rig was put together with the help of a junk box and few of the components had to be purchased. Almost all of the coils used as radio frequency chokes were rescued from old valve receivers or old television sets.

I'll only describe those items which are critical to the operation of the rig. These critical components are some of the coils and capacitors, and I'll start with the transmitter as shown in Fig. 1.

The coil L1 acts a radio-frequency choke and has an inductance of about 1-2mH. It consists of two pile-wound windings of about 150 turns each of 38-42s.w.g. enamelled copper wire on a 9mm Paxolin former.

The choke's impedance reduces the loading of the crystal by R1. Its inductance value may vary over a wide range without a great change in its effect. You must mount L1 at right angles to the anode choke, L3, to minimise interaction.

Inductor L3 is of similar value to L1 but it should be of marginally heavier gauge wire. Coil L2 was home-made and consisted of as many turns of 24-28s.w.g. wire as would fit on the body of a 1W carbon composition resistor ( $10\text{-}100k\Omega$ ).

In the  $\pi$  matching network, L4 is wound on a short length of 22mm wooden dowelling as shown in Fig. 2. Capacitors C7, a single 350pF, unit and C8, both sections of a dual 350+350pF unit, complete the matching circuitry.

#### **Receiver Coils**

The receiver coils are not difficult to make. The coils L5/L6 and L7/L8 are basically the same. Make them on 50mm lengths of wooden dowelling (new, dry 'broomstick' is ideal!). Wind the two sets of coils as shown in Fig. 3, and then choose one set to become L7/L8. The chosen set then has a third winding added, as shown in Fig. 4. After you've completed the coils, they can be finished and sealed with a coat of varnish.

#### **Simple And Effective**

The simple but very effective cathode keying method is used in this transceiver. Resistor R3 limits the maximum current flowing in the valve. Capacitors C4 and C23 give a small amount of keyed waveform shaping to reduce the possibility of 'key-clicks' and 'splatter'.

Sensing of the relative r.f. output level is carried out by R4, D1 and M1. This simple 'sampling' of the r.f., to provide an indication of what's appearing at the antenna socket, works well in practice. You should select R4 to give about 80-90% reading when the transmitter is correctly matched to your antenna.

#### **Boxed Up**


My prototype was made on a 230 x 135mm aluminium chassis, with a depth of 65mm. The front panel was made from another aluminium plate measuring 230 x 165mm.


The illustration, **Fig. 5**, shows the prototype photographed from above, displaying the above-chassis layout. Although you may not follow my layout entirely, it's a good idea to see the original project built-up before starting your own!

Visible in the photograph of the underside, Fig. 6, is the metal shield which divides the transmitter from the receiver section. The photographs showing the layouts in Fig. 5 and 6, are included as an indications only, as each transceiver will be different - depending whose junk box is used!

#### **Setting Up**

Setting up is very easy, when it's compared to synthesised transistor systems. When preparing to transmit, you should adjust C2 for maximum output from the combined crystal-oscillator power

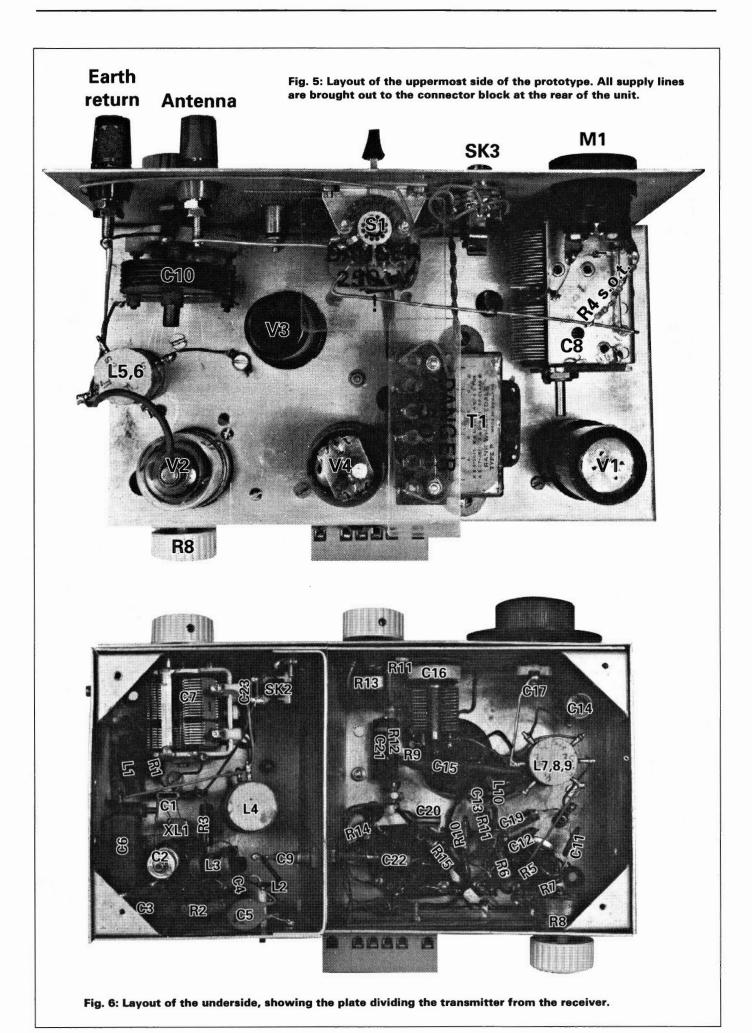

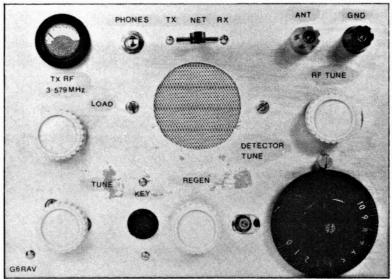

Photograph of the completed front panel.

amplifier. REMEMBER THAT THE HT VOLTAGE IS PRESENT DURING THIS ADJUSTMENT. You must use an insulated adjusting tool. The capacitor C1 may be used to change the operating frequency of the crystal slightly. If you adjust C1, you'll have to readjust C2 again for maximum output.

To adjust the  $\pi$  matching network for the first time, set C8 to maximum capacitance to start with. Connect the transmitter to an antenna which is known to work on 3.5MHz. Key the transmitter and set C8 to 'peak' the reading on M1. Vary C7 ('tune') to peak this further. 'Juggle' the settings of C7 and 8 to provide a maximum output into the antenna.

#### **Receiver Adjustments**

Start the receiver adjustments by setting C10, 14 and 17 to about mid-travel. Then set R8 to minimum (nearest to 0V) and R13 to minimum.

Finally, switch the transceiver to the 'net' position, and tune C16 to hear your own transmission. You should then move switch S1 to 'RX' and this time using C17, tune around for an incoming signal. 'Peak' this signal with small adjustments of C10, C14, R8 and R13 before giving the other station a call!

#### Regenerative Tips

The skill in using a regenerative receiver is easy-to-learn, although you might find it a little baffling at first. A 'Golden Rule' is that you should always use minimum 'reaction' setting at first.

The secret to success is to get the detector on the very 'threshold' of oscillation. It's at this point the receiver is at its most sensitive and it's why the 'regenerative' type is so effective with c.w. communication.

In use, you should advance R13, the 'reaction' control, until a general increase in noise level is heard. Then adjust C10, R8 and R13 to achieve the best level and quality of sound in your headphones or the loudspeaker. The receiver's main tuning is achieved by variable capacitor C17 which is used as the normal tuning control.

PW

Shoppin	ig Li	i <b>st</b>
Resistors Carbon film 5 30kΩ	i% 1	0.4W R4
Carbon Comp 150 $\Omega$ 220 $\Omega$ 270 $\Omega$ 330 $\Omega$ 12k $\Omega$ 39k $\Omega$ 51k $\Omega$ 68k $\Omega$ 100k $\Omega$ 330k $\Omega$ 1.5M $\Omega$ 1.5M $\Omega$	1 1 1 1 1 1 2 1	n 10% 1W R15 R5 R3 R16 R1 R6 R7 R12 R10, 11 R14
Wire-wound : 10kΩ	2.5W 1	R2
Variable 1W 6 10kΩ 47kΩ	6.3mm 1 1	shaft R8 R13
Capacitors High voltage	(300V	or greater)
Polyester 2.2n 100n	1 1 7	C3 C4, 5, 11, 12, 13, 18, 20, 23
Silver Mica 150p 470p	1	C15 C19
Feed-through 1000p	De-co	oupling (screw fixing) C9
Electrolytic (3	350V w	vorking) C21
Electrolytic (4	IOV wo	orking) C22
Air-spaced T 30p 50p 100p	rimme 2 1 1	er' (variable) C1, 2 ('beehive' variable type C14 C16
Air-spaced va 25p 100p 350p 350+350 1-10n	ariable 1 2 1 1 1	6.3mm shaft C17 C10, 16 C7 C8 C6 (minimum 500V working) See text.
Inductors		See Text
Semiconduc OA91 1N4006	ctors 1 2	D1 (or 1N4148) D2,3
Valves 6V6GT 6K7GT 6SJ7	2 1 1	V1, 4 V2 V3
Octal valve b (240: 6V@1/ loudspeaker, posts. One T insulation pr aluminium chassis. A	e crys pases, A a po plugs wo-po operti or p.c suital	stals in the 3.5-3.8MHz bands small valve audio transformer assible replacement), a small sockets and insulated terminus the Three-way switch with highest and a terminal block. Sheward a terminal block is material to make up the power supply for the planed by Niel Starkie, was anuary 1991 issue of PW (pagental value of PW (pagental value).
Suppliers For many co	noam	ents for this and other simila

**How Difficult?** 

**How Much?** 

Intermediate + £10+ (depends on the 'junk-box')

projects the following suppliers may be able to

help. You can telephone to check availability and

FJP Kits of Chadsmoor, Tel: (0543) 506487 Marco Trading of Wem, Shropshire, Tel: (0939)

Birkett of LincolnTel: (0522) 520767

#### THE COMPANY THAT BRINGS YOU THE LATEST TECHNOLOGY - FIRST !

SALES HOTLINE 021 552 0073 and HELPLINE 021 552 0051 (Office Hours)

#### ANOTHER RAYCOM PACKAGE

The TOKYO HX-240 HF Transverter when coupled to an all-mode 2m rig will give you 50W on 80 to 10m. RAYCOM have put together this unique unit with the new YAESU FT290RII.

#### IT WORKS GREAT!



FT-290R II£	429.00
TOKYO HX-240£	249.00
1/2 Size G5RV £	14.95
12 Amp PSU £	59.95
12 Amp PSU £ Nicads & Wall Charger	31.30
Total regular price £	784.20

RAYCOM PACKAGE .. £699.00
YOU SAVE £85.20!

Includes ALL D.C. and Co-ax leads

EXCELLENT HF AND VHF STARTER PACK
COME IN AND TRY IT FOR YOURSELF - YOU
WILL NOT BE DISAPPOINTED

FULL RANGE OF YAESU AND ICOM ALSO STOCKED

## HP100E/AR1000

## Exclusive to RAYCOM Short wave converter Module

Made in the UK by AKD Coverage 200kHz to 30MHz

HP100E with converter £299.00 HP100E no converter £249.00 Converter only ....... £ 59.00

NOTE

HP100/AR1000 not purchased from RAYCOM requires modification to work with the converter Cost £15.00

#### THE UK SCANNER EXPERTS

WE HAVE SECURED LIMITED QUANTITIES OF THE NEW ICOM SCANNERS DIRECT FROM JAPAN - HURRY TO RESERVE YOUR ONE NOW!

#### The FANTASTIC ICOM IC-R1 and IC-R100

 IC-R1
 500kHz to 1300MHz.
 £399.00

 IC-R100
 500kHz to 1800MHz.
 £499.00

OTHER HIGH QUALITY SCANNERS FROM RAYCOM BEARCAT UBC 50/55XL 66-88/136-174/406-512MHz ...... 10 memories, channel review, including FREE charger worth £4.95
BEARCAT BC 70XLT 66-88/136-174/406-512MHz £149.99 20 memories, full frequency display, with FREE car charger kit worth £4.50 BEARCAT UBC 100XLT 66-88/118-174/406-512MHz 100 memories, airband, search, including FREE car charger kit worth £4.50 £229.99 £229 99 100 memories, 5 search bands, including FREE mains adapter worth £4.95 JUPITER MVT 6000 mobile .. ONLY 25 to 550 MHz and 800 to 1300MHz,100 Memories JUPITER MVT 5000 Hand-held £249.00 25 to 550MHz and 800 to 1300MHz, 100 Memories AOR 3000 base ...... Limited Supplies available £699.00 0.1 to 2036 MHz, 400 mems, LSB/USB/CW/WFM/NFM/AM

MANY OTHER TYPES AND MODELS STOCKED - NEW AND USED.
SEND AN SAE FOR OUR LATEST USED LIST

URGENTLY WANTED - USED SCANNERS AND HAM GEAR, WORKING OR NOT.

## ICOM IC-R7000



Listen to weather, fire, coastguard, TV, airband and many, many more. Wide frequency coverage provides you with all the channels you need to become a VHF and UHF listener. Frequency coverage is guaranteed from 25 to 1300MHz, but may extend on individual units to 2GHz! Features include:

- O USB, LSB, FM, FM-N, AM
- O 99 memory channels, keypad entry
- O optional infra-red remote control
- O variable speed scan and delay
- O optional voice synthesizer
- O six tuning steps
- O sensitivity < 0.3µV for 10dB SINAD

Save £108! Raycom price £925

including FREE Royal 1300/AH7000 25 - 1300MHz discone complete with co-ax and plugs.

#### CHARGE IT!

Why not take advantage of the RAYCOM Credit Card and spread the payment for that scanner you've always wanted. Example: Yaesu FRG9600 MKV package £70 deposit and £28 per month (APR 36%). Call for a quote and written details! Licensed credit broker.

### YAESU FRG9600



9600 standard 60-905MHz .... £469.00
9600 MkII 60-950MHz ...... £499.00
9600 MkII pack 60-950MHz .... £545.00
9600 MkV 0.2-950MHz ... £625.00
9600 MkV pack 0.2-950MHz .. £699.00
Standard to MkII .. Upgrade £40.00
Standard to MkV ... Upgrade £149.00
MkII to MkV ...... Upgrade £129.00
Packs include PSU and ROYAL 1300!

#### RAYCOM COMMUNICATIONS SYSTEMS LIMITED, INTERNATIONAL HOUSE, 963 WOLVERHAMPTON RD, OLDBURY, WEST MIDLANDS B69 4RJ. TEL 021-544-6767, Fax 021-544-7124, Telex 336483 IDENTI G.

## RAYCOM

COMMUNICATIONS SYSTEMS LIMITED

Telephone

021 - 544 6767



#### RAYCOM gives you more BUYING POWER

ALL MAJOR CREDIT CARDS ACCEPTED. BC, ACCESS, DINERS. INSTANT CREDIT UP TO \$1000 (SUBJECT TO STATUS) WITH RAYCOM CREDIT CARD (APR 36%). INTEREST FREE CREDIT ON CERTAIN ITEMS AT MRP. CALL. FOR MORE DETAILS.

#### ORDERING INFORMATION


WE STOCK ICOM, YAESU, BEARCAT, MFJ, BUTTERNUT, CUSHCRAFT, AEA, NAVICO, STANDARD, TEN-TEC AND WELZ AMONG MANY OTHERS. SEND SAE FOR FULL LIST.

#### TEL: 021-552-0073

PHONE BEFORE 4PM FOR NEXT DAY DELIVERY BY COURIER (£15.00) - OR 2PM FOR DELIVERY BY POST (£10.00), PLEASE ALLOW TIME FOR CHEQUES TO CLEAR, MANY OTHER ITEMS IN STOCK, PLEASE CALL FOR MORE INFO AND FOR EXTRA SPECIAL DEALS!


#### INFOLINE 0836-771500 5-9pm (weekdays)

OPENING HOURS 9-5.30 MON TO SAT, 73 DE RAY G4KZH, PETER G4EWD COLIN and JOHN on the 'phone.

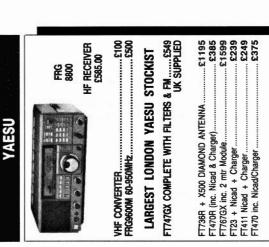


#### NEW 535 Available Soon We can modify your existing MOR 1000 Mk II 500 Kc-1300MHz £49 inc. return carriage AOR 1000 Mk III 500Kc-1300MHz no gaps AOR 3000 FM/AM/SSB... AOR 1000 Mk II... AOR 2515 5MHz-1500MHz... JRC-NRD HF RECEIVER £950 without Special Price Inc. ARA 30 NRD 525

£695 £695 £239 £575




#### **ECIAL** ON YAESU FFERS






WE ARE STANDARD AUTHORISED DEALER
C130 Z MIH
C528 DUAL BAND
AX700 SPECTRUM RECEIVER
New Model
C56080 Dual Band Mobile

#### **ECIAI** COM **OFFERS**

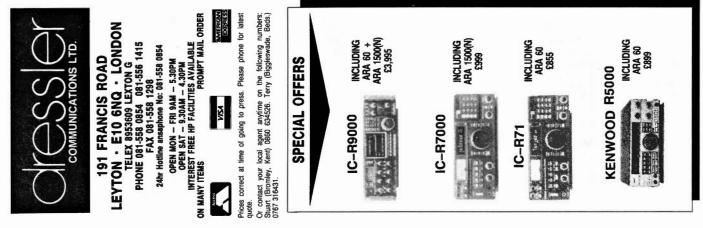

#### LONDON ΔΙ **ICOM** YAE

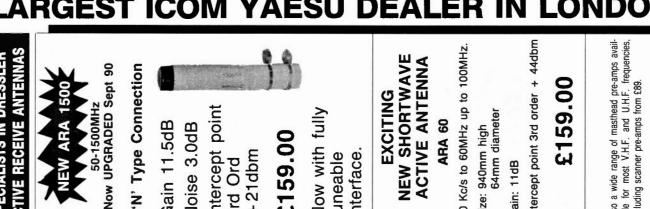



50-1500MHz

ntercept point

3rd Ord

Gain 11.5dB

Noise 3.0dB

KENWOOD

## Yaesu FT-650 24, 28 & 50MHz All Mode Transceiver



Recently Rob Mannion G3XFD and Tex Swann G1TEX had the chance to try the Yaesu FT-650 Transceiver. They liked what they found!

I often wonder why the various manufacturers go to the bother to produce sophisticated modern transceivers for a very limited number of bands. Mind you, after trying the Yaesu FT-650 for a week or so, I soon found that the benefit is biased towards the operator!

Tex Swann, our technical sub-editor, has a QTH better equipped with 50MHz antennas, so he had the first go. Now I've got to admit that Tex, when it comes to 'singing the praises' of modern commercial transceivers - is not known to 'overdo it'. Well, that was certainly the case until he tried this rig out on 50MHz!

#### Sensitive Receiver

The main comment coming from Tex after he'd had the transceiver for a few days, centred on the receiver. "It's incredibly sensitive" he said - and after I'd tried it out I could only agree.

Working on 50MHz, Tex found that the receiver's very sensitivity caused problems - due to the very high level of 'computer hash' which surrounds almost every 'built up' area.

The appalling 'hash' problem wasn't quite so bad at my QTH, and I was able to sit and listen quite fascinated - by the American 'Public Service Band' signals appearing between 35 and 50MHz.

#### **Good Guides**

The various signals from the USA and elsewhere on 'low-band' v.h.f., although not of interest to the radio amateur for their own sake - provide good indications of the band conditions on 28 and 50MHz. (Yes, I did find them both 'up' at the same time, to a limited extent).

Tex had listened a lot on 28MHz, and I'd had the opportunity to work some of the real DX that had appeared on 28MHz. The superior sensitivity of the FT-650 made my existing equipment sound very poor. Compared to the FT-650, my other equipment acted as if it was completely 'deaf'!

#### On The Air

I didn't work anyone on 24MHz, but I heard a great deal of activity. My antenna, which is particularly useful for 28MHz work, brought me excellent reports from as far afield as South America, the American Mid-West and my very first Japanese station on s.s.b.

The FT-650's triple-conversion receiver (dual-conversion on f.m.) coped with some terrible 'pile ups' on 28MHz and even sorted out some of the problems on the UK and international CB radio frequencies. The selectivity and dynamic range of this handsome little transceiver is certainly amongst the best I've heard in a while.

#### **General Coverage Receiver**

The ability of the receiver to tune continuously from 24.5 to 56MHz was a definite bonus. I was able to listen to many transmissions from the United States and farther afield - to provide me with a guide to propagation.


Tuning control, knobs and all controls are very well laid out. In particular (and I'm very 'fussy' in this respect) the main tuning control is a delight to use and it's completely free of the very common, but annoying, 'click-stop' effects.


As I'm a keen c.w. operator, I was keen to see how well it coped and again I can freely admit I was impressed. Yaesu offer a 600Hz crystal filter kit -but I managed without it on 28MHz!

#### **Transmitting**

The transceiver has a duty cycle of 100% at 100W at 25°C. It seemed to cope very well with everything even when it had been left on in the shack all day.

There is not a great deal of activity on 50MHz here in the south and I only worked a few stations. The reports on speech quality were very satisfactory indeed.

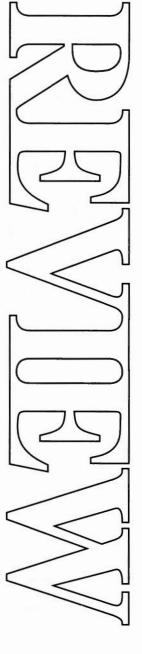

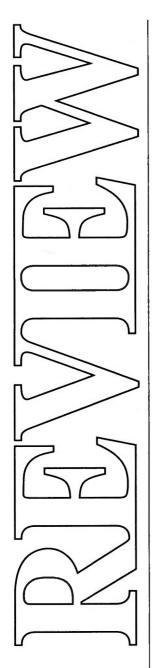

I'm pleased to say that there is growing interest in a.m. transmission. 'Ancient Modulation' is making a 'come back' - it's already got a foothold on 70MHz - and a good quality a.m. signal is a pleasure to listen to on v.h.f.

I heard several a.m. transmissions and the FT-650 provided good quality reception. Although I'm pleased that the transceiver has a.m. facilities, unfortunately, the a.m. stations were somewhere in the south midlands and they couldn't hear me!

#### **Summing Up**

To sum up our impressions of this rig, I must say that I found it delightful. I even found the multifunction controls easy to use. It was a delight to have in the shack, mainly because it covers some very interesting frequencies which provide some excellent DX 'forecasting'.

There's no doubt in the mind of G3XFD that Yaesu have an excellent transceiver here, and that the receiver is especially good in an area where receivers - even modern designs - can 'fall down'. If I get the chance - this is another of very few modern transceivers that I'd like in my shack. But this time, we'll let Tex Swann G1TEX (as a true v.h.f. man) have the final words on this machine.

#### **Swan Song**

As Rob has already told you, I have a series of antennas at my QTH, one of them being a delta loop for 50MHz. I've used this antenna with my FT-690R and consider it to be adequate, given the south facing side-of-the-hill position of my house. I had already noticed a few 'burbles', 'squeaks' and other associated 'twitters' with my '690, but I was unprepared for the continual barrage of signals which were marching down the coaxial cable into the FT-650.

Literally every few kHz I could hear some activity from the microprocessor-based cash-tills in the row of shops 200m to the north. The sensitivity of

the rig could be reduced with a simple switch, but even this left the rig more sensitive than my own.

A few tentative 'CQs' showed that the output of the rig was 'clean'. When I transmitted at approximately the 20W output level, little disturbance was noted on a nearby domestic v.h.f. f.m. radio.

My unanswered 'CQ' calls and the interference from 'background' radiation, has left me unable to comment on the transmit side. Unable to use the other two bands of the set, I listened to others making use of them. I noted that the delta loop was more than adequate to hear 'state-side' on 28MHz at signal levels as if the USA was next-door!

#### Controlled Fase

As I had little time to play with the rig 'on air', I'll expand on some of the controls that Rob found quite easy to use. The synthesisers in the rig have several stepping rates, changeable by either a small button or by pressing the function key in.

This action, and rotating the main tuning dial is a way of tuning the transceiver quickly, in large steps, through the range covered by the equipment.

With the smaller step-rate, the tuning, though in steps, was both precise and stable. It sounded 'smooth' when tuning into s.s.b. speech transmissions. The FT-650 also has a secondary receiver incremental tune (r.i.t.) which allows over 20kHz of independent 'off-tuning' capability.

#### Second Method

A second method of tuning in larger discrete 2.5kHz steps, was available from a smaller knob low on the right hand side of the rig. When using f.m. or a.m. this feature proves very useful.

The extra control knob, when in 'memory' mode, cycles through each memory in turn. To store a frequency into a memory, the operator has to tune the v.f.o. to the frequency required and then press the 'mem' button once.

#### **Specifications**

General

Receiving frequency range:

Transmitting frequency range:

24.5 to 56MHz 24.5 to 25MHz 28 to 29.7MHz 50 to 54MHz

Frequency Stability

(0 to +50°C) less  $\pm 2ppm$  on s.s.b./c.w., less than

10ppm on a.m./f.m.

**Emission Modes:** 

J3E (s.s.b.), A1A (c.w.), A3E (a.m.), F3E (f.m.).

Frequency Steps:

10 and 500kHz for all modes. 10Hz for s.s.b., c.w. and a.m.

2.5, 5, 10, 15, 20, 25kHz selectable (all modes).

Antenna Impedance:

50Ω

Supply Voltage:

13.8V d.c.

110-125 or 220-234V a.c. (selectable) 50-60Hz with

optional FP-22 a.c. p.s.u.

Power Consumption:

2A d.c. receive and 18A d.c. transmit (100W)

approximately.

# RSGB 1991 National Convention

## **Amateur Radio Exhibition**

at the

## **NEC**

## Saturday 27 April - Sunday 28 April

HALL 7, NATIONAL EXHIBITION CENTRE, BIRMINGHAM



#### **RSGB 1991 LOTTERY PRIZE DRAW!**

- Launch of Novice Licence
   RSGB Committee Representation
- ◆ Lecture Programme (Saturday only)
   ◆ Large Component Stand Area
- Large Trade Exhibition 
   Morse Tests (Saturday only, by appointment with RSGB)

Opening times:

Saturday 27 April, 10 until 6 Sunday 28 April, 10 until 5

Talk-in on 2 metres, S22

Entrance fee: £3. OAP's, disabled and children: £1.50, (includes free parking and shuttle service to Hall 7).

Children under 12 years of age accompanied by an adult are free of charge.

Concessionary rates for groups of 25 or more.

Organised by the RSGB Exhibition Rally Committee.

Trade Stand enquiries welcome to ERC Chairman, Norman Miller, G3MVV, 178 Warley Hill, Brentwood, Essex, CM14 5HF (tel: 0277 225563).

## KW COMMUNICATIONS LTD-

CHATHAM ROAD, SANDLING, MAIDSTONE ME14 3AY
Tel: 0622-692773, 762274 Fax: 0622-764614 Tix: 965834

	SCANNERS & RECEIVERS				WIDE BAND ANTENNA		
Item	Description	Price incl. VAT	P/P	Item	Description	Price incl. VAT	P/P
AR900K AR1000	6 band hand held scanning RX Scanning RX 8-1300MHz	£235.00 £249.00		AH 7000 YADC 2	Discone 25-1300MHz Discone 14-1300MHz	£82.50 £79.00	£4.00 £4.00
MVT500 MVT6000	Scanning RX 8-1300MHz Scanner RX 25-1300MHz hand held Scanner RX 25-13-MHz Base/Mobile.	£275.00		DSC 8 SC3000	Discone 14-1300MHz Discone TX/RX 70-680MHz Discone 300-512MHz	£29.95 £63.99	£4.00 £4.00
R100 R700				000000	Discord dod of Entries	200.33	24.00
FRG9600(M) R535	Wideband RX 60-950MHz Airband VHF & UHF	£499.00			ICOM		
WIN108	Handheld Airband 108-136MHz	£175.00		Item		Deltas	P/P
R2000 R5000	Handheld Airband 108-136MHz General Coverage HF Receiver General Coverage HF Receiver General Coverage HF Receiver Hand portable Receiver General Coverage HF Receiver General Coverage HF Receiver	£875.00			Description	Price incl.VAT	PIP
HF225 R 1	General Coverage HF Receiver Hand portable Receiver	£425.00 £399.00		IC-751A IC-735	HF All Band, General Coverage Rx 12V HF All Band, General Coverage Rx 12V HF All Band, General Coverage Rx + 6m. HF All Band, General Coverage Rx + 6m. HF All Band, General Coverage Rx + 6m. HF All Band, General Coverage Rx 12V MF Transceiver SSB/CW 12V MF MF Handportable with Nicad/charger MFM Handportable with Nicad/charger MFM Hobile 45W 20 Memo 12V MFM FM Handportable MFM 12V MFM Transceiver SSB/FM/CW 10W 12V MFM Transceiver SSB/FM/CW 10W 12V MFM Transceiver SSB/FM/CW 10W 12V MFM Handportable inc Nicad/charger TOCM FM Handportable inc Nicad/charger Wideband Receiver Automatic Antenna Tuner 100W Automatic Antenna Tuner 100W	£1500.00 £979.00	_
R 71 FRG 8800	General Coverage HF Receiver	£855.00 £649.00		IC-726 IC-725	HF All Band, General Coverage Rx + 6m HF All Band, General Coverage Rx 12V	£989.00 £759.00	_
	<b>BUTTERNUTT (U.S.A.)</b>			IC-505 IC-2SE	6M Transceiver, SSB/CW 12V. 2M FM Handportable with Nicad/charger	£529.00 £275.00	
Item	Description	Price	P/P	IC-2SET IC-2GE	2M FM Handportable Keypad entry DTMF	£295.00	-
		incl.VAT	PIP	IC-228E IC-228H	2M FM Mobile 25W 20 Memo 12V	£365.00	-
HF6VX HF2V	6 Band Vertical 80/40m Vertical 18 & 24MHz Add on Kit	£179.09 £142.00	£4.00	IC-290D	2M SSB/FM/CW 25W 5 Memo 12V	£559.00	-
A1824 STR 11	18 & 24MHz Add on Kit HF6V Radial Kit	£36.85 £33.50	£2.00 £3.00	IC-275H IC-4SE	70CM FM Handportable inc Nicad/charger	£1,039.00 £310.00	_
MPS 20MRK	IF & ZAMPIZ AGO ON NI. HF6V Radial Kit. Mounting Post HF6 & HF2. HF2V 20m Add on Kit. HF2V 30m Add on Kit. HF2V 30m Add on Kit or HF6 & HF2. 3dB 2m Colinear	£6.00	£2.00 £2.00	IC-4SET IC-4GE	70CM FM Handportable Keypad entry DTMF	£310.00 £299.00	_
30MRK TBR160S	HF2V 30m Add on Kit	£33.50	£2.00 £3.00	IC-R100 IC-AT150	Wideband Receiver	£499.00 £329.00	_
2MCV 2MCVS	3dB 2m Colinear 5dB 2m Colinear	£53.99 £63.99	£3.00 £3.00	IC-AT500	Automatic Antenna Tuner 500W	£529.00	-
HF5B	5 Band Mini Beam	£234.15	23.00				
	CUSHCRAFT (U.S.A.)				KENWOOD		
Item	Description	Price	P/P	Item	Description	Price incl.VAT	P/P
124WB	Cushcraft 124WB VHF Beam Anten	incl.VAT	£4.00	TS950SD TS940S	NEW Transceiver 9 Band TX General Cover Rx AutolATU HF 9 Bend Gen Cov TX/Rx HF/6m TX Gen Cov Rx 9 Band TX General Cov Rx H/Duty PSU All Band ATU/Power Meter NEW 2m H/Held	£3,199.00 £1,995.00	-
153CD 154CD	Cushcraft 15-3CD 3E1 25m Beam	£140.06	£8.00 £8.00	AT940 TS140	Auto/ATU HF 9 Band Gen Cov TX/Rx	£244.88	-
203CD	Cushcraft 20-3CD 3E1 20m Beam Cushcraft 20-4CD 4E1 20m Beam	£238.91	10.00	TS6805 TS440	HF/6m TX Gen Cov Rx	2985.00	_
204CD 215WB	Cushcraft 15E1 2m Yagi Antenna	£328.70 £98.99	00.83	PS50	H/Duty PSU	£222.49	-
4218XL A3SS	Cushcraft 15E1 2m Yagi Antenna 18 Element 2m Boomer Cushcraft 3 Ele Tribander SS	£121.90 £324.02	28.00	AT230 TH25	NEW 2m H/Held	£208.67 £238.00	_
A4S A50-6	Cushcraft 4 Ele Beam Antenna	£391.95 £182.51	00.83	TH45 TH75	All Barid Arto/Power Meiter NEW 2m H/Held NEW 70cm H/Held NEW 2m/70cm/H/Held	£269.00 £398.00	_
AP8 ARX2B	8 Band Vertical	£164.76	£8.00 £3.00	TH205 TH215	2m H/H 2m H/H Keyboard	£215.26	-
ARX450B AV3	Cushcraft VHF Beam Cushcraft AV3 Trapped Vert Ant Cushcraft AV3 Trapped Vert Ant Cushcraft 10, 15 & 20m Dipole. Cushcraft 10, 12 & 17m Dipole.	£42.84	£3.00	TR751 TM701	2m H/H Keyboard 2m H/H Keyboard 2m 25W M/M Mobile NEW 2m770cm FM Mobile 2m/70cm FM Mobile NEW 2m FM Mobile 50/10/5W NEW 70cm FM Mobile 50/10/5W	£599.00	-
AV5	Cushcraft AV5 Trapped Vert Ant	£151.80	£8.00 £8.00	TM721 TM231E	2m/70cm FM Mobile	£675.00	-
D3W	Cushcraft 10, 15 & 20m Dipole	£138.67 £138.87	£4.00 £4.00	TM431E	NEW 70cm FM Mobile 35/10/5W	£318.00	_
LAC1 LAC2	Cushcraft Lightning Arrestor	£6.58 £6.58	£1.00 £1.00				
LAC4H R45K	Cushcraft Lightning Arrestor Cushcraft Lightning Arrestor Cushcraft Lightning Arrestor R4 to R5 Conversion Kit Cushcraft 1/2 Wave Vert 10-20m	£22.78 £35.01	£1.00 £4.00		TEN TEC (U.S.A.)		
R5 TEN3	Cushcraft 1/2 Wave Vert 10-20m	£259.01 £115.03	€4.00	Item	Description	Price	P/P
				TT 562 TT 585	Omni V HF Transceiver CW/SSB/FM 200 9 bands	incl. VAT	-
	MFJ (U.S.A.)			TT 961 TT 282	Omni V HF Transceiver CW/SSB/FM 200 9 bands Paragon General Coverage HF Transceiver 200W Power Supply for Omni, Paragon 6 3MHz 250Hz Filter	£1,839.00 £215.00	
Item	Description	Price incl.VAT	P/P	TT 285	6.3MHz 500Hz Filter 6.3MHz 500Hz Filter	£60.00	£2.00 £2.00
MFJ1274 MFJ1278	Packet Radio Terminal	£204.25 £228.49	£3.00 £3.00	TT 288 TT 1140	6.3MHz 1800Hz Filter Circuit Breaker	£60.00 £16.00	£2.00 £2.00
MFJ1701 MFJ1704	Multi Mode Data Controller 6-way Antenna Switch 4 Position Ant Switch RF Noise Bridge Antenna Noise Bridge 300W Dummy Load Econo Keyer Kit	£39.30 £66.41	£2.00 £2.50	TT 217 TT 218	9 0MHz 500Hz Filter 9.0MHz 1800Hz Filter	£60.00	£2.00 £2.00
MFJ202B MFJ204B	RF Noise Bridge	£63.20 £84.31	£2.00 £2.00	TT 219 TT 256	9 0MHz 250Hz Filter FM Transceive Module for Omni & Paragon	£60.00	£2.00 £2.50
MFJ260 MFJ401B	300W Dummy Load	£32.57	£2.00 £3.00	TT 220 TT 425E	9 0MHz 2 4KHz Filter Titan Linear 1 5kW 160-10m	£60.00	£2 00
MFJ407B MFJ422B	Electronic Keyer	£78.73	£3 00	TT 420 TT 9420	Hercules II 500W Solid State 160-10m	€839.00	**
MFJ422BX		070.40	£3.00	TT 700C	Ten Tec Flectret Hand Microphone	CEED OO	
MFJ484C	Electronic Morse Keyer W/O Bencher	£/0.40		TT 705	Too Too Electrot Deck Margathana	£660.00	£2.00
MFJ722	Electronic Morse Keyer W/O Bencher Grandmaster Memory Keyer CW/SSB Filter	£162.32 £76.46	£3.00 £2.50	TT 705 TT 238	Ten Tec Electret Desk Microphone Ten Tec ATU 2.0kW 'L' match 160m-10m	£660.00 £32.00 £65.00 £361.69	£2 00
MFJ723 MFJ752C	Electronic Keyer Electronic Keyer Electronic Morse Key Bencher Electronic Morse Keyer W/O Bencher Grandmaster Memory Keyer CWSSB Filter CW Filter Tunable Filter	£104.42	£3.00 £2.50 £2.50 £3.00	TT 705	6 3MHz 250Hz Filter 6 3MHz 350Hz Filter 6 3MHz 1800Hz Filter Circuit Breaker 9 0MHz 500Hz Filter 9 0MHz 1800Hz Filter 9 0MHz 250Hz Filter 9 0MHz 250Hz Filter 9 0MHz 24KHz Filter 10 1MHz 15WH 160-10m 10 1MHz 15WH 160-10m 10 1MHz 15WH 160-10m 10 1MHz 16WHz	£660.00 £32.00 £65.00 £361.69 £153.33	
MFJ723 MFJ752C MFJ815 MFJ840	Tunable Filter SWR Meter 2kW	£104.42 £78.74 £21.02	£3 00 £2.50 £2 50 £3.00 £2.50 £2.00	TT 705 TT 238		£660.00 £32.00 £65.00 £361.69 £153.33	£2 00
MFJ723 MFJ752C MFJ815 MFJ840 MFJ841	CW Filer Tunable Filler SWR Meter ZkW Zm Wattmeter Zm In-line Wattmeter 200 Watt ATU	£104.42 £78.74 £21.02 £42.14 £70.05	£3 00 £2.50 £2 50 £3.00 £2.50 £2.00 £2.00	TT 705 TT 238 TT 254	YAESU		£2 00 £3.50
MFJ723 MFJ752C MFJ815 MFJ840 MFJ841 MFJ901B MFJ931	Tunable Filter SWR Meter ZkW 2m Wattmeter 2m In-line Wattmeter 200 Watt ATU. Arthicial Ground.	£104.42 £78.74 £21.02 £42.14 £70.05	£3 00 £2.50 £2.50 £3.00 £2.50 £2.00 £2.00 £2.50 £3.50	∏ 705 ∏ 238 ∏ 254	YAESU Description	Price	£2 00
MFJ723 MFJ752C MFJ815 MFJ840 MFJ841 MFJ931 MFJ931 MFJ941D MFJ945C	Tunable Filter SYM Meter 22W SYM Meter 22W Can In-line Watmeter 200 Watt ATU Arthicial Ground 300 Watt Basic Tuner Versa Tuner 11 Mobile	£104.42 £78.74 £21.02 £42.14 £70.05 £86.61 £105.40 £97.37	23 00 22.50 22.50 23.00 22.50 22.00 22.00 22.50 23.50 23.50 23.50	TT 705 TT 238 TT 254 Item	YAESU  Description  HP Transceiver	Price incl.VAT £2,995,00	£2 00 £3.50
MFJ723 MFJ752C MFJ815 MFJ840 MFJ841 MFJ901B MFJ931 MFJ941D MFJ945C MFJ949D MFJ962B/C	Uw Filer SWR Meter 2kW 2m Wattmeter 200 Watt ATU Artificial Ground 300 Watt Basic Tuner Versa Tuner 11 Mobile De Luxe 300W ATU 1.5kW ATU	£104.54 £104.42 £78.74 £21.02 £42.14 £70.05 £86.61 £105.40 £97.37 £168.82 £258.84	83 00 82 50 82 50 83 00 82 50 82 00 82 00 82 50 83 50 83 50 83 50	TT 705 TT 238 TT 254 Item FT1000 FT767 FT747GX	YAESU  Description  HP Transceiver  HF Transceiver Budget HF Transceiver	Price incl.VAT £2,995.00 £1,599.00 £659.00	£2 00 £3.50
MFJ723 MFJ752C MFJ815 MFJ840 MFJ841 MFJ901B MFJ931 MFJ941D MFJ945C MFJ949D	Uw Filter SWN Meter 22W 2W 2W 2M In	£104.54 £104.42 £78.74 £21.02 £42.14 £70.05 £86.61 £105.40 £97.37 £168.82 £258.84	23 00 22.50 22.50 23.00 22.50 22.00 22.00 22.50 23.50 23.50 23.50	TT 705 TT 238 TT 238 TT 254     them	PAESU  Description  HP Transceiver HF Transceiver Budget HF Transceiver MK II HF Transceiver MA PSI	Price incl. VAT £2,995.00 £1,599.00 £659.00 £969.00	£2 00 £3.50
MFJ723 MFJ752C MFJ815 MFJ840 MFJ841 MFJ901B MFJ931 MFJ941D MFJ945C MFJ949D MFJ962B/C	Uw Filer SWR Meter 2kW 2m Wattmeter 200 Watt ATU Artificial Ground 300 Watt Basic Tuner Versa Tuner 11 Mobile De Luxe 300W ATU 1.5kW ATU	£104.54 £104.42 £78.74 £21.02 £42.14 £70.05 £86.61 £105.40 £97.37 £168.82 £258.84	83 00 82 50 82 50 83 00 82 50 82 00 82 00 82 50 83 50 83 50 83 50	TT 705 TT 238 TT 238 TT 254 #tem FT1000 FT767 FT747GX FT757GX FP700 FC700 FC700 FP757HD	PAESU  Description  HP Transceiver HF Transceiver Budget HF Transceiver MK II HF Transceiver MA PSI	Price incl. VAT £2,995.00 £1,599.00 £659.00 £969.00	£2 00 £3.50
MFJ723 MFJ752C MFJ815 MFJ840 MFJ841 MFJ901B MFJ931 MFJ941D MFJ945C MFJ949D MFJ962B/C	Uw Filter SWN Meter 22W 2W 2W 2M In	£104.42 £78.74 £21.02 £42.14 £70.05 £86.61 £105.40 £97.37 £168.82 £258.84 £279.62	83 00 82 50 82 50 83 00 82 50 82 00 82 00 82 50 83 50 83 50 83 50	### 705 ### 7254 ### FT1000 FT767 FT747GX FT757GX F7757GX F7757HD F14700 F174700 F1	PAESU  Description  HP Transceiver HF Transceiver Budget HF Transceiver MK II HF Transceiver 20A P.S.U  Manual ATU Heavy Duty 2m P.S.U  New 2m/70cm Dual Band FM Mobile. MK II Super 290 2m Multimode 2.5W.	Price incl. VAT £2,995.00 £659.00 £959.00 £149.00 £149.00 £258.75 £675.00 £429.00	£2 00 £3.50 P/P
MFJ723 MFJ752C MFJ815 MFJ840 MFJ841 MFJ901B MFJ931D MFJ945C MFJ949D MFJ962B/C MFJ968	Tunable Filter SWR Metter 2kW 2m Wattmeter 2m In-line Wattmeter 200 Watt ATU Artificial Ground 300 Watt Basic Tuner Versa Tuner 11 Mobile De Luxe 300W ATU 1.5kW ATU 1.5kW ATU  LOADS & SWITCHES  Description  Toyo 30W 1-500MHz Dummy Load	£104.42 £78.74 £21.02 £42.14 £70.05 £86.61 £105.40 £97.37 £168.82 £258.84 £279.62	£3 00 £2.50 £2.50 £3 00 £2.50 £2.00 £2.00 £2.00 £2.50 £3.50 £3.50 £3.50 £3.50	TT 705 TT 238 TT 254   Nem	PAESU  Description  HP Transceiver HF Transceiver HF Transceiver MK II HF Transceiver MK II HF Transceiver 20 A PSU Manual ATU Heavy Duty 2m PSU New 2m/70cm Dual Band FM Mobile. MK II Super 290 2m Multimode 2.5W MK II 6m M/Mode 2.5W New 2m HH Kewbard	Price incl. VAT £2,995.00 £1,599.00 £969.00 £149.00 £149.00 £258.75 £675.00 £429.00	£2 00 £3.50 P/P
MFJ723 MFJ752C MFJ815 MFJ840 MFJ940 MFJ9901B MFJ9941D MFJ945C MFJ949D MFJ949D MFJ962B/C MFJ986	Tunable Filter SWR Metter 2kW 2m Wattmeter 2m In-line Wattmeter 200 Watt ATU Artificial Ground 300 Watt Basic Tuner Versa Tuner 11 Mobile De Luxe 300W ATU 1.5kW ATU 1.5kW ATU 1.5kW Roller Inductor Tuner  LOADS & SWITCHES  Description  Toyo 30W 1-500MHz Dummy Load Toyo 100W 1-500MHz Dummy Load	£104.42 £78.74 £21.02 £42.14 £70.05 £88.61 £105.40 £97.37 £188.82 £258.84 £279.62 Price incl. VAT £10.20 £45.00 £64.00	£3 00 £2.50 £2.50 £3 00 £2.50 £2.00 £2.00 £2.50 £3.50 £3.50 £3.50 £3.50 £3.50	TT 705 TT 238 TT 254 In 254  Item  F11000 F1787 F1747 F1747 F17576X F700 F700 F700 F7577 F17400 F1290 F1690 F1691 F1411 F1811 F1811	PAESU  Description  HP Transceiver HF Transceiver HF Transceiver MK II HF Transceiver MK II HF Transceiver 20 A PSU Manual ATU Heavy Duty 2m PSU New 2m/70cm Dual Band FM Mobile. MK II Super 290 2m Multimode 2.5W MK II 6m M/Mode 2.5W New 2m HH Kewbard	Price incl. VAT £2,995.00 £1,599.00 £969.00 £219.00 £149.00 £258.75 £675.00 £429.00	£2 00 £3.50 P/P
MFJ723 MFJ815 MFJ840 MFJ840 MFJ841 MFJ901B MFJ9311 MFJ9450 MFJ9490 MFJ9490 MFJ9490 MFJ962B/C MFJ966	Tunable Filter SWR Metter 2kW 2m Wattmeter 2m In-line Wattmeter 2m In-line Wattmeter 200 Wat ATU Artificial Ground 300 Watt Basic Tuner Versa Tuner 11 Mobile Discuss 300 W ATU 1.5kW ATU	£104.42 £78.74 £21.02 £42.14 £70.05 £86.61 £105.40 £97.37 £188.82 £258.84 £279.62	E3 00 £2.50 £2.50 £3.00 £2.00 £2.00 £2.00 £2.50 £3.50 £3.50 £3.50 £3.50 £3.50 £3.50 £3.50 £3.50 £3.50 £3.50 £3.50	TT 705 TT 208 TT 254 ************************************	YAESU  Description  HP Transceiver HF Transceiver Budget HF Transceiver Budget HF Transceiver MI (I HF Transceiver 20A P.S.U. Manual ATU Heavy Duty 2m P.S.U. New 2m770cm Dual Band FM Mobile. MK II Super 290 2m Multimode 2.5W. MK II GM MMode 2.5W. New 2m H/H Keyboard New 2m70cm H/H Keyboard New 1m H/H H	Price incl VAT £2,995.00 £1,599.00 £969.00 £149.00 £258.75 £675.00 £429.00 £225.00 £239.00 £239.00 £239.00	£2 00 £3.50
MFJ723 MFJ815 MFJ840 MFJ840 MFJ841 MFJ901B MFJ941D MFJ945D MFJ945D MFJ945D MFJ962B/C MFJ968 MFJ962B/C MFJ968	Tunable Filter SWR Metter 2kW 2m Wattmeter 2m In-line Wattmeter 2m In-line Wattmeter 200 Wat ATU Artificial Ground 300 Watt Basic Tuner Versa Tuner 11 Mobile Discuss 300 W ATU 1.5kW ATU	£104.42 £78.74 £21.02 £42.14 £70.05 £86.61 £105.40 £97.37 £188.82 £258.84 £279.62	£3 00 £2 50 £2 50 £3 00 £2 50 £2 00 £2 00 £2 50 £3 50	TT 705 TT 208 TT 254   **Mem** F11000 F1767 F17470X F17570X F9700 FC700 F757HD F14700 F1290 F14700 F1290 F1411 F1411 F1410 F1238 F1738 F1738 F1738 FN89	YAESU  Description  HP Transceiver HF Transceiver Budget HF Transceiver Budget HF Transceiver MI (I HF Transceiver 20A P.S.U. Manual ATU Heavy Duty 2m P.S.U. New 2m770cm Dual Band FM Mobile. MK II Super 290 2m Multimode 2.5W. MK II GM MMode 2.5W. New 2m H/H Keyboard New 2m70cm H/H Keyboard New 1m H/H H	Price incl VAT £2,995.00 £1,599.00 £969.00 £149.00 £258.75 £675.00 £429.00 £225.00 £239.00 £239.00 £239.00	£2 00 £3.50 P/P
MFJ723 MFJ815 MFJ840 MFJ840 MFJ840 MFJ9301B MFJ9340 MFJ9340 MFJ9340 MFJ9340 MFJ9360 MFJ9360 MFJ9320 MFJ9300 MFJ9320 MF	Tunable Filter SWR Metter 2kW 2m Wattmeter 2m In-line Wattmeter 2m In-line Wattmeter 200 Wat ATU Artificial Ground 300 Watt Basic Tuner Versa Tuner 11 Mobile Discuss 300 W ATU 1.5kW ATU	£104.42 £78.74 £21.02 £42.14 £70.05 £86.61 £105.40 £97.37 £188.82 £258.84 £279.62	83 00 82 50 82 50 82 50 82 90 82 90 83 90 84 90 85 90 86	TT 705 TT 238 TT 254 In 254  In 256	YAESU  Description  HP Transceiver HF Transceiver Budget HF Transceiver Budget HF Transceiver 20A PS U ansceiver 20A PS U ansceiver What I I I I I I I I I I I I I I I I I I I	Price incl VAT £2,995.00 £1,599.00 £969.00 £149.00 £258.75 £675.00 £429.00 £225.00 £239.00 £239.00 £239.00	£2 00 £3.50
MFJ723 MFJ815 MFJ840 MFJ840 MFJ841 MFJ901B MFJ941D MFJ945D MFJ945D MFJ945D MFJ962B/C MFJ968 MFJ962B/C MFJ968	Tunable Filter SWR Metter 2kW 2m Wattmeter 2m In-line Wattmeter 200 Watt ATU Artificial Ground 300 Watt Basic Tuner Versa Tuner 11 Mobile De Luxe 300W ATU 1.5kW ATU 1.5kW ATU 1.5kW Roller Inductor Tuner  LOADS & SWITCHES  Description  Toyo 30W 1-500MHz Dummy Load Toyo 100W 1-500MHz Dummy Load	£104.42 £78.74 £21.02 £42.14 £70.05 £86.61 £105.40 £97.37 £188.82 £258.84 £279.62	E3 00 £2.50 £2.50 £3.00 £2.50 £2.00 £2.00 £2.00 £3.50	TT 705 TT 208 TT 254  Item  FT1000 FT767 FT7476X FT7576X FP700 FP7577HD FP4700 F1290 F1590 F1591 F1511 F1611 F1610 F1738 F1738 F1898 F1898 F1898 F1810	PAESU  Description  HP Transceiver HF Transceiver BB et HF Transceiver BB et HF Transceiver BB et HF Transceiver BB et HF Transceiver AN Edward BB et	Price incl VAT £2,995.00 £1,599.00 £969.00 £149.00 £258.75 £675.00 £429.00 £225.00 £239.00 £239.00 £239.00	£2 00 £3.50 P/P
MFJ723 MFJ815 MFJ840 MFJ840 MFJ841 MFJ901B MFJ9311 MFJ9450 MFJ9490 MFJ9490 MFJ962B/C MFJ966	Tunable Filter SWR Metter 2kW 2m Wattmeter 2m In-line Wattmeter 2m In-line Wattmeter 200 Wat ATU Artificial Ground 300 Watt Basic Tuner Versa Tuner 11 Mobile Discuss 300 W ATU 1.5kW ATU	2104.42 278.72 2710.42 221.02 221.02 221.02 221.02 221.02 221.02 201.05	E3 00 £2.50 £2.50 £3.00 £2.00 £2.00 £2.00 £2.00 £3.50	TT 705 TT 238 TT 254 **Mem** FT1000 FT767 FT747GX FT77GX FP700 FC700 FC700 FC700 F1290 FT34700 F1290 FT411	YAESU  Description  HP Transceiver HF Transceiver Budget HF Transceiver Budget HF Transceiver Budget HF Transceiver 20A P.S.U Manual ATU Heavy Duty 2m P.S.U New 2m70cm Dual Band FM Mobile. MK II Super 290 2m Multimode 2.5W MK II 6m M/Mode 2.5W New 2m H/H Keyboard New 70cm H/H Keyboard New 2m/70cm Dual Band H/H. 2m Mini H/H. 70cm Mini H/H. Nicad Battery Pack (23/73) Nicad Battery Pack (23/73) 2/70cm 25W Base Station	Price incl. VAT \$2,985.00 \$1,599.00 \$2,599.00	£2 00 £3.50
MFJ723 MFJ815 MFJ840 MFJ840 MFJ841 MFJ901B MFJ9311 MFJ9450 MFJ9490 MFJ9490 MFJ962B/C MFJ966	Tunable Filter SWR Metter 2kW 2m Wattmeter 2m In-line Wattmeter 2m In-line Wattmeter 200 Watt ATU Artificial Ground 300 Watt Basic Tuner Versa Tuner 11 Mobile De Luxe 300W ATU 1.5kW ATU	1:46.39 2:104.42 2:104.42 2:11.02 2:42.14 2:42.14 2:42.14 2:42.14 2:42.14 2:42.14 2:43.05 2	E3 00 £2.50 £2.50 £3.00 £2.00 £2.00 £2.00 £2.00 £3.50	TT 705 TT 238 TT 254 ************************************	YAESU  Description  HP Transceiver HF Transceiver Budg FF Transceiver Budg FF Transceiver Budg FF Transceiver AN (I H+F Transceiver AN AN (I H+F Transceiver AN AN (I H+F Transceiver AN A	Price incl. VAT 22, 995.00 12, 599.00 12, 599.00 12, 599.00 12, 599.00 12, 599.00 12, 50	£2 00 £3.50 P/P
MFJ723 MFJ815 MFJ840 MFJ841 MFJ9018 MFJ9310 MFJ9491D MFJ949D MFJ949D MFJ962B/C MFJ986    **tem**  T35 T100 T200 DL1 K6 2 S20N SA 450M SA 450M SA 450N DRAE UHF   **tem**  **tem**  **tem**  **T100 **T200 **T	Tunable Filter SWR Metter 2kW 2m Wattmater 200 Watt ATU Artificial Ground 300 Watt Basic Tuner Versa Tuner 11 Mobile De Luxe 300W ATU 1.5kW ATU 1.5kW Roller Inductor Tuner  LOADS & SWITCHES  Description  Toyo 30W 1-500MHz Dummy Load Toyo 100W 1-500MHz Dummy Load Toyo 100W 1-500MHz Dummy Load Toyo 200W 1-500MHz Dummy Load Toyo 200W 1-500MHz Dummy Load Koyo Coaxial Switch 2 way 1.0kW 1-1000MHz SO239 Toyo Coaxial Switch 2 way 1.0kW 1-1000MHz SO239 Toyo Coaxial Switch 2 way 2.5kW 1-1500MHz SV UHF 3 position Antenna Switch 'N' VHF 3 position Antenna Switch 'N' VSWR/POWER METERS  Description  Koyo 1560W 2m In-Line VSWR	1:46.32 1:104.42 1:104.42 1:104.42 1:104.42 1:104.42 1:104.42 1:105.40 1:105.4	E3 00 £2.50	TT 705 TT 208 TT 254  Item  FT1000 FT767 FT747GX FT77GX FP700 FC700 FC700 FC700 F12890 FT4700 F12890 FT411 FT471 F	PAESU  Description  HP Transceiver HF Transceiver Budget HF Transceiver Budget HF Transceiver MA PS U Manual ATU Heavy Duty 2m PS U New 2m/70cm Dual Band FM Mobile MK II Super 290 2m Multimode 2.5W MK II Grown M/Mode 2.5W New 2m H/H Keyboard New 7m/70cm Dual Band H/H 2m Mini H/H 70cm Mini H/H 70cm Mini H/H 70cm Mattery Pack (23/73) Nicad Battery Pack (23/73) Nicad Battery Pack (23/73) 2/70cm 25W Base Station  ROTATORS  Description  Hy Gain for up to 3 Sq. ft. wind load Hy Gain for up to 3 Sq. ft. wind load	Price incl. VAT 2, 95.00 1, 599.00 1	£2 00 £3.50 P/P
MFJ723 MFJ815 MFJ840 MFJ815 MFJ840 MFJ9301B MFJ9310 MFJ9341D MFJ9341D MFJ9340	Tunable Filter SWR Metter 2kW 2m Wattmater 220 Watt ATU Artificial Ground 300 Watt Basic Tuner Versa Tuner 11 Mobile De Luxe 300W ATU 1.5kW ATU 1.5kW Roller Inductor Tuner  LOADS & SWITCHES  Description  Toyo 30W 1-500MHz Dummy Load Toyo 100W 1-500MHz Dummy Load Toyo 100W 1-500MHz Dummy Load Toyo 100W 1-500MHz Dummy Load Toyo 200W 1-500MHz Dummy Load Toyo 200W 1-500MHz Dummy Load Koyo Coaxial Switch 2 way 1.0kW 1-1000MHz SO239 Toyo Coaxial Switch 2 way 1.0kW 1-1000MHz SO239 Toyo Coaxial Switch 2 way 2.5kW 1-1500MHz SO239 UHF 3 position Antenna Switch 'N VHF 3 position Antenna Switch 'N VSWR/POWER METERS  Description  Koyo 1560W 2m In-Line VSWR Koyo 7/40/400W 1-0-460MHz Koyo 7/40/2000 1-8-520MHz	2104.42 2104.42 2104.42 2104.42 210.05 210.20 210.2	E3 00 £2.50	TT 705 TT 238 TT 254  Item F11000 F1787 F1747CX F17700 F7700 F7700 F7700 F75700 F1290 F1690 F1691 F1411 F1611 F1611 F1617 F1738 F1898	PAESU  Description  HP Transceiver HF Transceiver Budget HF Transceiver Budget HF Transceiver MA PS U Manual ATU Heavy Duty 2m PS U New 2m/70cm Dual Band FM Mobile MK II Super 290 2m Multimode 2.5W MK II Grown M/Mode 2.5W New 2m H/H Keyboard New 2m/70cm Dual Band H/H 2m Mini H/H 70cm Mini H/H 70cm Mini H/H 70cm Mini H/H 70cm Mobile MC 23/73) 2/70cm 25W Base Station  ROTATORS  Description  Hy Gain for up to 3 sq. ft. wind load Hy Gain for up to 3 sq. ft. wind load Hy Gain for up to 15 sq. ft. wind load Hy Gain for up to 15 sq. ft. wind load Hy Gain for up to 15 sq. ft. wind load Hy Gain for up to 15 sq. ft. wind load Hy Gain for up to 15 sq. ft. wind load Hy Gain for up to 15 sq. ft. wind load Hy Gain for up to 15 sq. ft. wind load Hy Gain for up to 15 sq. ft. wind load Hy Gain for up to 15 sq. ft. wind load	Price incl. VAT 2, 95.00 1, 529.00 1	£2 00 £3.50 P/P
MFJ723 MFJ815 MFJ840 MFJ840 MFJ840 MFJ9018 MFJ9018 MFJ9311 MFJ945C MFJ949D MFJ945C MFJ986   **tem**  T35 T100 T200 DL1 KS 2 S20N SA 450M SA 50M SA 450M SA 50M S	Tunable Filter SWR Metter 2kW 2m Wattmeter 22 Or Index Authorities 23 Or Watt Basic Tuner 24 Or Wattmeter 25 Or Watt Basic Tuner 26 Or Watt Basic Tuner 27 Or Watt Basic Tuner 28 Or Watt Basic Tuner 29 Or Watt Basic Tuner 20 Or Watt Dummy Load 20 Or Watt Dummy Load 20 Or Watt Boom 20 Or Watt Dummy Load 20 Or Watt Boom 20 Or Watt Dummy Load 20 Or Watt Boom 20 Or Watt Dummy Load 20 Or Watt Boom 20 Or Watt Dummy Load 20 Or Watt Boom 20 Or Watt Dummy Load 20 Or Watt Watt Dummy Load	2104.42 2104.42 2104.42 2104.05 242.01 242.05 286.61 2105.40 2279.62 2258.84 2279.62 2258.84 2279.62 2258.84 2279.62 2258.89 224.15 224.15 224.15 224.15 224.15 224.75 224.75 224.75	E3 00 £2.50	T 705   T 254   T 25	PAESU  Description  HP Transceiver HF Transceiver Budget HF Transceiver MK II HF Transceiver 20A P.S U. Manual ATU Menual ATU Mill II Berry Mill II Berry Mill II Berry Mill II Berry Mill II Mill Tocm Mini H/H Tocm Mini H/H Tocm Mini H/H Nicad Battery Pack (23/73) Nicad Battery Pack (23/73) Nicad Battery Menual Menual Menual Menual Menual Menual Menual Mill Mill Mill Mill Mill Mill Mill Mi	Price incl. VAT 22,955.00 12,599.00 12659.00 1245.00 1	£2 00 £3.50 P/P
MFJ723 MFJ815 MFJ840 MFJ841 MFJ901B MFJ9311 MFJ941C MFJ945C MFJ949D MFJ945C MFJ949D MFJ962B/C MFJ968	Tunable Filter SWR Metter 2kW 2m Wattmeter 2m In-line Wattmeter 200 Watt ATU Artificial Ground 300 Watt Basic Tuner Versa Tuner 11 Mobile De Luxe 300W ATU 1.5kW ATU 1.5kW Roller Inductor Tuner  LOADS & SWITCHES  Description  Toyo 30W 1-500MHz Dummy Load Toyo 100W 1-500MHz Dummy Load Toyo 100W 1-500MHz Dummy Load Toyo 200W 1-500MHz Dummy Load Toyo 200W 1-500MHz Dummy Load Texpro 1.5kW 160-10M Dummy Load Texpro 1.5kW 160-10M Dummy Load Koyo Coaxal switch 2 way 1.0kW Koyo Coaxal switch 2 way 1.0kW Koyo Coaxal Switch 2 way 2.5kW 1-500MHz SO239 Toyo Coaxial Switch 2 way 2.5kW 1-500MHz SO239 Toyo Coaxial Switch 2 way 2.5kW 1-500MHz SO239 Toyo Coaxial Switch 2 way 2.5kW 1-500MHz N VHF 3 position Antenna Switch N' VHF 3 position Antenna Switch N' VHF 3 position Antenna Switch N' Koyo 15/60W 2m In-Line VSWR Koyo 15/60W 2m In-Bush 1300MHz Koyo 15/60W 2m In-Bush 1300MHz Koyo 15/60W 2m 1-60MHz	2104.42 278.74 278.74 221.02 242.10 242.10 252.05 2105.40 2105.40 2279.62 2256.84 2279.62 279	E3 00 £2.50 £2.60 £2.60 £2.60 £2.60 £2.60 £2.60 £2.60 £2.60 £2.60 £2.60 £2.60 £2.60 £2.60 £2.60	TT 705 TT 208 TT 254  Item  FT1000 FT767 FT7476X FT7576X FT7576X FT7570	PAESU  Description  HP Transceiver HF Transceiver Budget HF Transceiver MK II HF Transceiver 20A P.S U. Manual ATU Menual ATU Mill II Berry Mill II Berry Mill II Berry Mill II Berry Mill II Mill Tocm Mini H/H Tocm Mini H/H Tocm Mini H/H Nicad Battery Pack (23/73) Nicad Battery Pack (23/73) Nicad Battery Menual Menual Menual Menual Menual Menual Menual Mill Mill Mill Mill Mill Mill Mill Mi	Price incl. VAT 22,955.00 12,599.00 12659.00 1245.00 1	£2 00 £3.50 P/P
MFJ723 MFJ752C MFJ815 MFJ840 MFJ841 MFJ901B MFJ9311 MFJ9341C MFJ9341C MFJ948C MFJ948B MFJ948C MFJ986    **tem**  T35 T100 T200 DL1 KS 2 S20N SA 450M S	Tunable Filter SWR Metter 2kW 2m Wattmeter 2m In-line Wattmeter 2m In-line Wattmeter 200 Watt ATU Artificial Ground 300 Watt Basic Tuner Versa Tuner 11 Mobile De Luxe 300W ATU 1.5kW ATU	2104.42 278.74 278.74 221.02 221.02 221.02 221.02 221.02 221.02 221.02 221.02 221.03 2	E3 00 £2.50 £2.60 £2.60 £2.60 £2.60 £2.60 £2.60 £2.60 £2.60 £2.60 £2.60 £2.60 £2.60 £2.60 £2.60 £2.60	TT 705 TT 208 TT 254  Item  FT1000 FT767 FT747GX FT747GX FT747GX FT747GX FT747GX FT74700 FT800 FT800 FT801 FT811 FT800 F	PAESU  Description  HP Transceiver HF Transceiver Budget HF Transceiver Budget HF Transceiver Budget HF Transceiver Budget HF Transceiver 20A P.S.U. Manual ATU Heavy Duty 2m P.S.U. New 2m/70cm Dual Band FM Mobile. MK II Super 290 2m Multimode 2.5W. MK II 6m MiMode 2.5W. New 2m H/H Keyboard New 70cm H/H Keyboard New 70cm H/H Keyboard New 70cm H/H Keyboard New 2m/70cm Dual Band H/H. 70cm Mini H/H. 70cm Mini H/H. 70cm Maistery Pack (23/73). 2/70cm 25W Base Station  ROTATORS  Description  Hy Gain for up to 3 sq. ft. wind load. Hy Gain for up to 8.5 sq. ft. wind load.	Price incl. VAT 22,995.00 51,599.00 5219.00 5259.00 5219.00 5259.00 5299.00 52	£2 00 £3.50 P/P
MFJ723 MFJ815 MFJ840 MFJ815 MFJ840 MFJ9018 MFJ9311 MFJ945C MFJ945C MFJ945D MFJ945D MFJ945D MFJ968B   **tem**  T35 T100 D1 D2 LS20N SA 450N DRAE UHIF DRAE UH	Tunable Filter SWR Metter 2kW 2m Wattmeter 2co In-Market Wattmeter 2co In-Mark	2104.42 2104.42 2104.42 211.014 211.015 210.540 210.54	23 00 12.50	T 705	PAESU  Description  HP Transceiver HF Transceiver But HF HF LEVEL But HT LEVEL But HF LEVEL But	Price incl. VAT 22,955.00 12,599.00 1269.00 1249.50 1249.50 12	£2 00 £3.50 P/P
MFJ723 MFJ752C MFJ815 MFJ840 MFJ841 MFJ901B MFJ9311 MFJ941D MFJ945C MFJ949D MFJ949C MFJ966	Tunable Filter SWN Meter 22W 25W 25W 25W 26W 21 In-line Wattmeter 200 Watt ATU Arthical Ground 300 Watt Basic Tuner Versa Tuner 11 Mobile De Luxe 300W ATU 1.5kW ATU 1.5kW Roller Inductor Tuner  LOADS & SWITCHES  Description  Toyo 100W 1-500MHz Dummy Load Toyo 100W 1-500MHz Dummy Load Toyo 100W 1-500MHz Dummy Load Toyo 200W 1-500MHz Dummy Load Koyo Coaxial Switch 2 way 1.0kW 1-1000MHz N Toyo Coaxial Switch 2 way 1.0kW 1-1000MHz SO239 Toyo Coaxial Switch 2 way 2.5kW 1-500MHz N Toyo Toyo Coaxial Switch 2 way 2.5kW 1-500MHz N Toyo Coaxial Switch 2 way 2.5kW 1-500MHz N Toyo 15/60W 2m In-Line VSWR Koyo 7/40/400W 140-460MHz Koyo 5/20/200 1 8-500MHz Koyo 5/20/200 1 8-500MHz Koyo 5/20/200 1 8-500MHz Koyo 200W 140-650MHz Toyo 120W 3.5-1500MHz Toyo 120W 3.5-1500MHz Toyo 200W 2m 8-70cm VSWR/Wattmeter	2104.74 2104.74 2104.74 2104.74 2104.74 2104.74 2104.75 2106.85 2105.40 2107.37 2108.82 2258.84 2279.82 2258.84 2279.82 244.00 244.00 244.00 244.00 244.00 244.00 2575.00 244.00 2575.00 258.89 252.86 252.86 252.86 252.86 252.86 252.86 252.86 252.86 252.86 253.86 253.86 254.86 255.86 255.86 255.86 255.86 256.86	E3 00 £2.50 £2.60	TT 705 TT 208 TT 254  Item  FT1000 FT767 FT747GX FT747GX FP700 FP7770 FP7700 FP7770 FT4700 FT	PAESU  Description  HP Transceiver HF Transceiver Budget HF Transceiver Budget HF Transceiver Budget HF Transceiver 20A P.S.U. Manual ATU Heavy Duty 2m P.S.U. New 2m70cm Dual Band FM Mobile. MK II Super 290 2m Multimode 2.5W. MK II 6m MiMode 2.5W. New 2m H/H Keyboard New 70cm H/H Keyboard New 70cm H/H Keyboard New 70cm H/H Keyboard New 2m/70cm Dual Band H/H. 70cm Mini H/H. 70cm Mini H/H. 70cm Maitery Pack (23/73). Nicad Battery Pack (23/73). Nicad Battery Pack (23/73). Nicad Battery Pack (23/73).  PROTATORS  Description  Hy Gain for up to 3 sq. ft. wind load Hy Gain for up to 8.5 sq. ft. wind load Hy Gain for up to 15 sq. ft. wind load Hy Gain for up to 15 sq. ft. wind load Hy Gain for up to 2 sq. ft. wind load Sky King Light Duty Rolator Yaesu Round 360° Offsel lead unit, 3 wive, rotary dial control Yaesu Round 360° Offsel lead unit, 3 wive, rotary dial control Yaesu Round 360° Vaesu Round 360	Price incl. VAT 2, 995.00 1, 599.00 2, 295.00	£2 00 £3.50 P/P
MFJ723 MFJ752C MFJ815 MFJ840 MFJ841 MFJ901B MFJ9311 MFJ941D MFJ945C MFJ949D MFJ949C MFJ966	Tunable Filter SWR Metter 2kW 2m Wattmater SWR Metter 2kW 2m Wattmater 200 Watt ATU Artificial Ground 300 Watt Basic Tuner Versa Tuner 11 Mobile De Luxe 300W ATU 1.5kW ATU 1.5kW Roller Inductor Tuner  LOADS & SWITCHES  Description  Toyo 30W 1-500MHz Dummy Load Toyo 100W 1-500MHz Dummy Load Toyo 100W 1-500MHz Dummy Load Toyo 200W 1-500MHz Dummy Load Toyo 200W 1-500MHz Dummy Load Koyo Coaxial Switch 2 way 1.0kW 1-1000MHz SO239 Texpro 1-5kW 160-10M Dummy Load Koyo Coaxial Switch 2 way 1.0kW 1-1000MHz SO239 Toyo Coaxial Switch 2 way 2.5kW 1-1500MHz 'N' Toyo Coaxial Switch 2 way 2.5kW 1-500MHz 'N' Toyo Coaxial Switch 2 way 2.5kW 1-500MHz 'N' VHF 3 position Antenna Switch 'N' VHF 3 position Antenna Switch 'N' VSWR/POWER METERS  Description  Koyo 15/60W 2m In-Line VSWR Koyo 7/40/400W 140-460MHz Koyo 5/20/200 1 8-520MHz Koyo 5/20/200 1 8-520MHz Koyo 5/20/200 1 8-500MHz Koyo 200W 1-8-60MHz Koyo 200W 1-8-60MHz Toyo 200W 2m 8-70cm VSWR/Wattmeter  It see it please ask — we have over	2104.42 2104.42 2104.42 2104.05 242.04 242.05 286.61 2105.40 297.37 2188.82 2258.84 2279.62 245.00 244.00 244.00 275.00 248.89 228.89 2	83 00 12.50	### ### ### ### ### ### ### ### ### ##	PAESU  Description  HP Transceiver HF Transceiver Budget HF Transceiver Budget HF Transceiver Budget HF Transceiver 20A P.S.U. Manual ATU Heavy Duty 2m P.S.U. New 2m70cm Dual Band FM Mobile. MK II Super 290 2m Multimode 2.5W. MK II 6m MiMode 2.5W. New 2m H/H Keyboard New 70cm H/H Keyboard New 70cm H/H Keyboard New 70cm H/H Keyboard New 2m/70cm Dual Band H/H. 70cm Mini H/H. 70cm Mini H/H. 70cm Maitery Pack (23/73). Nicad Battery Pack (23/73). Nicad Battery Pack (23/73). Nicad Battery Pack (23/73).  PROTATORS  Description  Hy Gain for up to 3 sq. ft. wind load Hy Gain for up to 8.5 sq. ft. wind load Hy Gain for up to 15 sq. ft. wind load Hy Gain for up to 15 sq. ft. wind load Hy Gain for up to 2 sq. ft. wind load Sky King Light Duty Rolator Yaesu Round 360° Offsel lead unit, 3 wive, rotary dial control Yaesu Round 360° Offsel lead unit, 3 wive, rotary dial control Yaesu Round 360° Vaesu Round 360	Price incl. VAT 2, 995.00 1, 599.00 2, 295.00	£2 00 £3.50 P/P

OPEN TUES.-SAT., 9,30-5.30 (CLOSED MONDAYS)

STOCK ITEMS USUALLY DESPATCHED WITHIN 24 HRS

VISA

Instant credit available
Mail/Telephone order by cheque or Credit Card
(E&OE)

DELIVERY/INSURANCE PRICES MAINLAND ONLY

#### **Specifications (continued)**

#### **Transmitter Details**

Power Output: 10-100W adjustable (Max. 50W a.m. carrier)

Duty Cycle: 100% @ 100W, 25°C

Modulation Types: Balanced, filtered carrier on s.s.b.

Low-level (early stage) on a.m.

Variable reactance on f.m.

Maximum f.m. deviation ± 5kHz at normal i.f.

bandwidth,

± 2.5kHz at narrow i.f. bandwidth.

Spurious radiation: (harmonic/non-harmonic) at least 50/40dB below

peak output below 30MHz. 70/60dB below peak

output above 50MHz.

Carrier Suppression (s.s.b. operation): at least 40dB below peak output.

Unwanted sideband suppression: at least 40dB below peak output.

**Receiver Details** 

Circuit Specifications: triple-conversion superhet in c.w. and a.m.

modes. (dual-conversion on f.m.)

Intermediate frequencies: 13.69, 455kHz and 8.215MHz (excluding f.m.

mode).

Sensitivity (r.f. amplifier on): 0.125 $\mu$ V for 10dB S/N c.w./s.s.b.

 $0.5\mu V$  for 10dB S/N on a.m.  $0.16\mu V$  for 12dB SINAD on f.m.

Selectivity

Narrow: 2.4/4.5kHz (-6/-60dB) s.s.b., c.w., a.m.

Narrow (with c.w. optional filter): 600/1200Hz (-6/-60dB)
Narrow (f.m.): 8/30kHz (-6/-40dB)

Normal (a.m.): 6/18kHz (-6/-50dB) Normal (f.m.): 15/30kHz (-6/-40dB)

Intermediate Frequency Rejection: 70dB or better (within amateur bands)

Image Rejection: 60dB or better (within amateur bands)

Intermediate frequency notch depth: 4dB or better.

The memory number then flashes in the display. The next step is to rotate the smaller knob to select the memory which is to hold the information, before pressing the 'mem' button in until a fairly long 'beep' is heard. Both frequency and mode have been stored.

On this transceiver, only memories containing data were displayed. Overall I found this method simple and quite easy to understand.

There's another control button which can be used to transfer the information in the 'other direction' (memory to v.f.o.) if required. This allows 'frequencies of interest' to be held in memory, to be recalled and used as a tuning start point.


#### **Portable Operation**

This rig isn't just a base station for the shack, where an optional switch-mode p.s.u. can be used. The transceiver's also supplied with a long, very heavy 12V lead to allow the set to be used in the 'field'.

I'd like the opportunity to take it to a local hilltop overlooking the sea to work the DX. Please SMC can I borrow it again when the weather is warmer and vertical antennas are allowed on 50MHz?

PW


The Yaesu FT-650 is available from South Midlands Communications at Chandler's Ford, Eastleigh, Southampton S05 3BY, at £995 inclusive of VAT (optional power supply £149 inclusive of VAT) and we thank them for the loan of the review model.

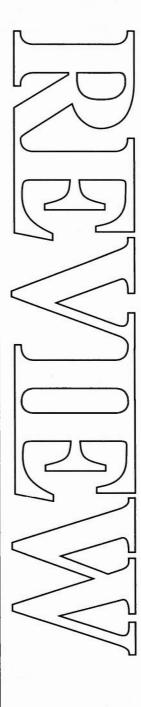

#### Theory

## **Pulsed System Receivers**

## Using The Frequency Sensitive And Gate (FSAG)

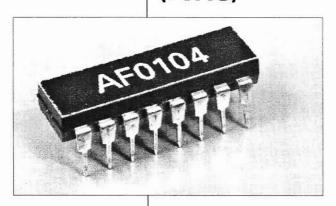

Gerald Stancy
G3MCK, brings
you news of a
development,
which could
revolutionise
receiver design.

I recently visited the Deutsches Institut für Ausserordentliches Denken in Österhase southern Germany. I was shown a receiver based on a prototype frequency sensitive AND gate (f.s.a.g.) chip.

Before describing the receiver it's necessary to understand how the f.s.a.g. works and this means delving into a little basic digital theory. It's only by understanding digital techniques fully that you'll realise how special the f.s.a.g. is.

#### **AND Pulses**

A basic building blocks of digital circuitry is the AND gate. The simplest version of this has two inputs producing one output as shown in Fig. 1. The diagram of Fig. 2 expresses this in logic terms where 'the presence of a signal at a port is denoted by '1' and the absence by '0'. For a logical '1' output to occur both inputs must also be logical '1', or to use the jargon, set-on. Under all other conditions

Fig. 1.

Fig. 2.

Fig. 2.

Fig. 3.

of the inputs a '0' output is present. The value '1' means a signal more than 67% of the supply voltage. Logical '0' represent a voltage less than 33% of the supply voltage.

#### 'Recht In Linie'

The table shows the states of the output for the various input stages. Therefore, it shows that if B is held at '1' and A pulses i.e., 0101.. etc, then the output will pulse in phase with A. As the german demonstrator said "Recht in linie," or in-phase sequence.

The f.s.a.g. has similar characteristics but with one critical difference. That is both A and B must be sine waves. Besides the AND logic that's been described, output will only occur when A and B have the same frequency.

Therefore if a c.w. signal on 3550kHz is applied to input A and a steady reference signal of 3550kHz to input B, a pulsed d.c. voltage will appear at the output. This voltage will follow the c.w. that is applied to input A. It can, after filtering to remove the r.f. ripple, key an audio oscillator. The basic c.w. receiver is shown in Fig. 3.

#### **FSAG Operation**

To use the f.s.a.g. receiver is an uncanny experience. All the signals have exactly the same tone, strength, and s/n because, you are listening to a keyed audio oscillator. They just drop in without the hetrodynes experienced when using a conventional receiver. If the receiver is to be used for other than spot frequency work this knife-edge tuning is a problem.

#### **Oscillator Loop**

The solution is rapidly sweeping the reference oscillator about its mean frequency. The deviation, controlled by the operator, is small but gives a bandwidth of twice the deviation frequency. Too little and the tuning is sharp, too wide, and neighbouring signals cause interference by keeping the output port 'on'. This causes a continual audio tone to be heard in the loudspeaker. However by careful manipulation of both the sweep and the reference oscillators, it is possible to eliminate them all except the zero beat interference. Of course, no drift can be tolerated in either the receiver or the transmitter. The architecture of a practical f.s.a.g. receiver is shown in Fig. 4.

#### **Enhanced Decode**

A further enhancement, still under development, will almost completely solve the problem of zero-beat QRM. This is done by utilising the idea of phase-ANDing. Here, besides the basic properties, both inputs must be in-phase to produce an output.

The institute prototype was managing to acheive 90° phase discrimination. It should be possible for up to four c.w. stations to use the same frequency without causing mutual interference. More development is taking place, with the objective of increasing the phase resolution. It's the phase difference be-

tween the interfering signals and not the number of zero-beat signals that's important with this new technique.

#### **Yellow Over-Unit**

While this has been a description of the use of the f.s.a.g. in a c.w. receiver, the system can be duplexed for RTTY and similar f.s.k. pulse systems. Light with a wavelength of 576nm (521THz) must be present to allow the f.s.a.g to work properly. A single yellow coloured polarised filter has to be fitted in the final unit. Unfortunately the f.s.a.g. is not yet available in the current trade catalogues, but is due shortly (projected date 29th February 1994).

The f.s.a.g. will eventually enable all amateurs to build high performance c.w. receivers with ease. Roll on that day!

PW

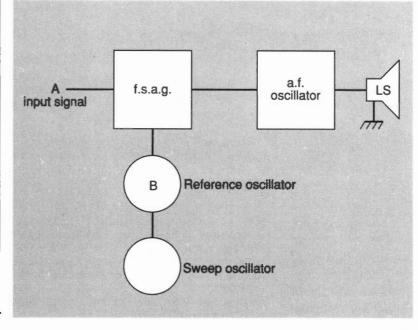


Fig. 4.

#### **ADVERTISEMENTS**

## MARTIN LYNCH G4HKS

#### THE AMATEUR RADIO EXCHANGE CENTRE

286 Northfield Avenue, Ealing, London W5 4UB.

#### **IMPORTANT NOTICE**

#### **MARTIN LYNCH**

is consistently paying high prices for good clean amateur radio equipment.

I now have a large amount of customers who urgently require complete equipment and accessories.

If you have any YAESU, KENWOOD, ICOM, STANDARD or any other mainline equipment, please ring or fax your details through immediately.

The items can either be sold on your behalf or bought outright for cash.

CALL: 081 566 1120 or Fax: 081 566 1207

#### **SERVICE INFORMATION**

PANASONIC		PHILIPS CON'T	and the same of th
NV-230 svce man	VCR2.50	N1543 svce man	VCR4.00
NV-370 cct description	VCR 1.00	N1545 svce man	VCR4.00
NV-370 svce hints	VCR 1.50	VR2000 svce man	VCR3.50
NV-688 svce hints	VCR 1.50	VR2005 svce man	VCR3.50
NV-688 svce man	VCR3.50	VR2010 svce man	VCR3.50
NV-688 train. man	VCR 2.00	VR2020 svce man	VCR3.50
NV-777 svce hints	VCR 1.50	VR2073 svce man	VCR3.50
NV-777 train. man	VCR 3.00	VR2075 svce man	VCR3.50
NV-788 svce hints	VCR 1.50	VR2340 svce man	VCR3.50
NV-788 svce man	VCR3.50	VR6462/00F svce man	VCR3.00
NV-788 train. man	VCR 2.00	VR6920 svce man	VCR2.50
NV-810EG/B/EO svce man			
NV-830E/EG/B svce man	VCR 3.00	PYE	-77545
NV-850 svce hints	VCR 2.00	CT70/71 svce man	CTV2.50
NV-850 train, man	VCR 1.50	KT3 chassis svce man	CTV 3.00
NV-2000 svce man	VCR3.50	System 4 tech.svce mar	
NV-7000E/B svce hints	VCR3.00		LARGE 10.00
NV-7000EM svce manaul	VCR 3.50	Rank Arena Teletext AC	
NV-7200 svce hints	VCR 2.00		CTV 1.50
NV-7800 svce hints	VCR2.00	TECHNICS	
NV-7800 train, man	VCR 3.00	SL-BD2 svce man (t/tab	
NV-8400 svce man	Port. VCR 3.00	SL-BD3 svce man (t/tab	
NV-8600E/B/A svce man	VCR3.50	SL-BD21 svce man (t/tai	
NV100/NV-V10 svce man	Port.VCR & timer3.50	SL-D4/(K) svce man (d.	drive t/table) . 1.00
NV100E/EG/B suppl. man	Port. VCR 1.00		
NV180 train. man	VCR2.00	Abbreviations:	
NV180E svce man	Port. VCR 3.00		Nacional Services
NV200 svce man	VCR2.50	Svce	Service
NV300/333/340 suppl. man		Man	Manual
NV3000/NV-B30 svce man			
TC-2203 svce man	CTV2.50	Train	
TC-2204 svce man	CTV 1.00	Suppl	Supplement
TC-2205 svce man	CTV 1.50°	Port	
TC-2207 svce man	CTV2.00		
VW-ET180 svce man	VCR tun/timer 1.50	CTV	Colour TV
PHILIPS			
520 series syce info	CTV3.00°		
2021 syce man	VCR3.00	LOTS MORE	CHEETE
G26C583 svce man	CTV2.50	LUIS MORE	SUEE19
G26C584 svce man	CTV2.50	ETC. AVA	LARIE
G26C586 svce man	CTV2.50	LIV. AVA	LADEL.

Postal Orders and Cheques made payable to:

PW PUBLISHING LTD

4.00

CTV CTV VCR VCR VCR VCR

K30 chassis svce info K30 chassis svce man N1500 svce man N1502 svce man N1512 svce man N1515 svce man

PO Box No. 21, Enefco House, The Quay, POOLE, Dorset BH15 1PP


FOR FULL LIST SEND

**SAE TO ADDRESS** 

BELOW.

#### Construction

## High Impedance Oscilloscope Probe

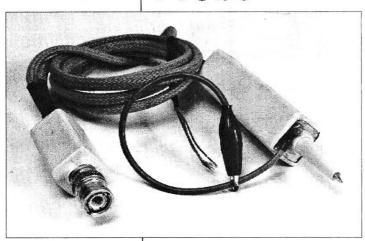

You can get the best out of your 'scope and 'sniff out' the high frequencies with this active probe from Steve Farrow G8IWY.

If electronic measuring equipment is to be effective, it must have minimum effect on the circuit under test. This applies especially to the oscilloscope at higher frequencies. Special techniques have to be used to reduce to a minimum the loading by the resistive and capacitive elements of the oscilloscopes input circuitry. This useful little project helps to do just that.

#### Low Impedance

Oscilloscopes have high impedance inputs. A typical 'scope input circuit can be  $1M\Omega$  in parallel with perhaps some 5-10pF. At d.c then, the input impedance is  $1M\Omega$  (at d.c. a capacitor is effectively open circuit). At 1MHz the impedance of the input capacitor has fallen to 15-30k $\Omega$ . Then you have the lead itself to consider. One metre of coaxial lead can have a capacitance of 80-100pF. This gives an impedance of about  $1.7K\Omega$ . At 20MHz this decreases to about  $80\Omega$  impedance.

#### **One Answer**

The illustration in Fig. 1 shows the circuit of a typical 'x10' passive probe. The impedances of the 11pF and the 100pF capacitors are arranged to have the same ratio as the 9 and  $1M\Omega$  resistances. That is 9:1, giving an overall 'gain' figure of 0.1 (-20dBs) at all frequencies. BUT the input capacitance is now

Fig. 2: High impedance active probe circuit diagram.

less than 11pF, much lower than with the coaxial cable alone.

The major disadvantage of the above answer is that the probe has an overall loss. This means that the 'scope must have more gain to counteract this loss. Wide bandwidth, high gain amplifiers are more costly to produce. This is the main reason that budget 'scopes are not brilliant at high frequencies.

How can we keep the high impedance, but keep as wide a bandwidth as possible?

#### **Another Approach**

The answer to that is quite simple, make the probe an active probe. Put an amplifier in it. That is the option I have taken.

The full circuit diagram is shown in Fig. 2. The circuit is in essence a source/emitter follower, with the output balanced round about 0V. The d.c. input impedance is  $10M\Omega$  from R1. Resistor R2, with both diodes D1 and 2, protect the gate of TR1 against overdrive. The voltage on the gate of TR1 is limited to no more than  $\pm 6V$  by their action. Capacitor C1, gives a compensating boost to the higher frequencies.

Transistor TR2, further buffers the signal to drive the coaxial line capacity. Resistors R5-7 form matching pads, to make sure the coaxial line plays no other part in changing the signal. In r.f. terms they would be there to keep the v.s.w.r. down to 1:1.

#### Construction


I would recommend that you use both p.c.b.s in the designed cases if you are building the probe. This will maximise the bandwidth and viability of the completed probe. Until the system has been calibrated, don't solder the top cover for each part.

Follow the layout shown in Fig. 3, when you build the probe. Leave the soldering of R3 to the last, when assembling the amplifier board. Care should be taken to keep component leads to the minimum length. The value of R3 is adjusted, such that the quiescent voltage at R5, is as near 0V as possible. Start with a value of about  $1.5k\Omega$ . Increase the value to make the voltage more positive, and reduce it to make it more negative. An aid when doing this is to use a  $2k\Omega$  variable resistor to set the voltage level. When you are satisfied, remove and measure the resistance needed to achieve the result. Use the nearest preferred, E24 or E48 series, resistance value for R3.

#### **Covered Up**

The cases for both parts are shown in Fig. 4. Make two each of the two channel pieces. In one of the shorter channels, drill a suitable hole to allow R7 to be adjusted. Make four end-plates as shown in the diagram. For the 'scope board, one end-plate is soldered directly to the plug to fit on the 'scope. The other has a hole suitable to take the coaxial cable.

For the probe end, one end-plate has a central hole for the coaxial cable, and one smaller hole for both power supply leads to pass through. For the forward end of the probe, I used a 4mm socket to allow the actual probe tip to be changed to suit the needs of the job. This meant a single hole about 6mm across to fit the socket through. You could

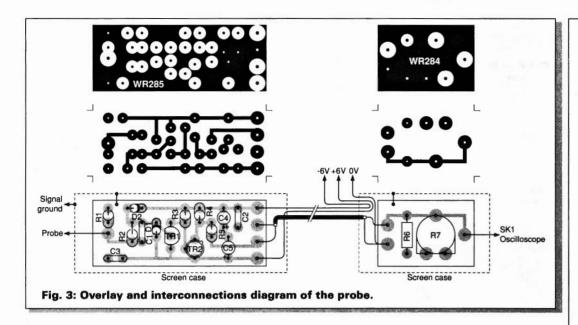

also, if needed, fit another coaxial socket for the tip. The drawing of **Fig. 5** shows a suitable probe-tip in this case. You might like to replace the wire, with a sewing needle suitably soldered in position.

The top foil groundplane of both boards should be soldered, in several places, to each case. Check that the probe is working as designed, and solder the top half of each case into place, taking care to see that you can adjust R7 on the smaller board.

After calibration, finish the project, by adding a final covering of heat-shrink sleeving to hide the soldering as much as possible.

#### Calibration

To calibrate the probe you should find a suitable source of 2V peak-to-peak sine wave signals at a frequency of about 10kHz. The next step, is to use the probe to monitor this signal, and adjust R7 to give a 1V peak-to-peak signal on the 'scope display.

#### Capabilities

The probe has a 'gain' of 0.5, with an input impedance of  $10M\Omega$  in parallel with about 6pF, made up from the diodes and f.e.t. capacitances. I measured the response of the probe up to 48MHz and Fig. 6 shows the results. I think you can see from this, that the probe is more than adequate for the vast majority of oscilloscopes.

#### **Further Reading**

**Book Services.** 

'The Oscilloscope In Your Workshop', a series of articles by Fred Judd G2BCX, starting in this issue of PW

How To Use Oscilloscopes And Other Test Equipment, R.A. Penfold, £3.50 Oscilloscopes How To Use Them, How They Work, Ian Hickman, £12.95 Both of the above books are available from our PW

Short 30mm length
7/0.2 equipment wire

Back nut, braid sleeve & rubber clamp bush discarded

Insulator & pin retained with epoxy resin

Fig. 5: One idea for a possible interchangeable probe tip.




Fig. 6: This shows the measured characteristics of the prototype unit

How Much? £10 How Difficult? Beginner+

#### **Shopping List**

#### Resistors

 $\begin{array}{cccc} \text{Metal film 1\%, 0.25W} \\ 43\Omega & 1 & R5 \\ 220\Omega & 1 & R6 \\ 100k\Omega & 1 & R2 \\ R3 \text{ is selected on test as} \\ \text{described in the text.} \end{array}$ 

 $\begin{array}{ccc} \text{Metal film 1\%, 0.6W} \\ \text{220}\Omega & 1 & \text{R4} \\ \text{10M}\Omega & 1 & \text{R1} \\ \end{array}$ 

Variable Miniature Horizontal Mounting 100Ω 1 R7

#### Capacitors

Miniature Disc Ceramic 10nF 3 C1-3

Tantalum Bead 16V 1μF 2 C4,5

#### Semiconductors

1N914 2 D1,2 (or 1N4148) 2N2222 1 TR2 2N3819 1 TR1

#### Miscellaneous

Double-sided p.c.b.s (PW p.c.b. service), tinplate to make the boxes, plugs sockets to suit the 'scope, a length of miniature  $50\Omega$  coaxial cable up to a maximum of about 1m, a 4mm 'banana' socket and matching plug, nylon weave sleeving.

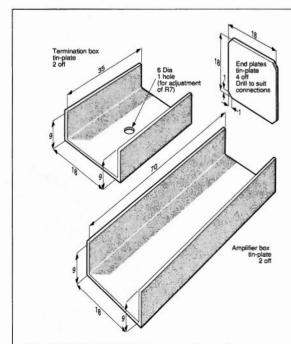


Fig. 4: Basic measurements of the three shapes required to make the probe screening boxes.

#### MAKE YOUR INTERESTS PAY

Over the past 100 years more than 9 million students throughout the world have found t worth their while! An ICS home-study course can help you get a better job, make more morey and have more fun out of life! ICS has over 30 years experience in home-study courses and is the largest correspondence school in the world. You learn at your own hace, when and where you want under the guildance of expert 'personal' tutors. Find out low we can help YOU. Post or phone today for your FREE INFORMATION PACK on the lourse of your choice. (Tick one box only!)

lame		Address	
GCSE/GCE/SCE over 40 examina	tion subje	ects to choose from	
Electrical Contracting/ Installation		Computer Programming	
Electrial Engineering		Car Mechanics	
Basic Electronic Engineering (City & Guilds)		Refrigeration & Air Conditioning	
Electronics		TV, Video & Hi-Fi Servicing	

### **MAGNUM RALLY 1991**

#### Irvine, Scotland

Organised by

Cunninghame & District Amateur Radio Club

#### Sunday

24th March at 10.30 a.m.

Entrance programme £1.50 Many traders and Bring & Buy Talk-in on S22

Bring the whole family for a day out in one of Scotlands best leisure centres.

#### STUDENT SPONSORSHIP

WOOD & DOUGLAS, a UK independent company specialising in Radio Communication Engineering in the VHF, UHF and Microwave spectrum, is now seeking candidates for sponsorship through Higher Education as part of their ongoing student sponsorship policy.

If you are considering a career in radio engineering, have an active interest in radio as a hobby and are expecting to enter full time University or Polytechnic training in Autumn 1991, then WOOD & DOUGLAS could have a package that will suit both your financial and industrial training needs.

Please enquire in writing initially giving full details of your personal situation, subjects under study and any placement offers received to date.

Send your details to: Student Sponsorship Wood & Douglas Lattice House Baughurst, Basingstoke Hampshire RG26 5LL





**WOOD & DOUGLAS** 

VHF/UHF COMMUNICATIONS PRODUCTS

AKD

Unit 5 **Parsons Green Estate** Boulton Road Stevenage Herts SG1 4QG

MANUFACTURERS OF: AMATEUR RADIO EQUIP **ACCESSORIES & FILTERS** 



MAIL ORDER DEPT.

Stock Items Normally Despatched within 48 hours, 21 days latest.

TEL. 0438 351710

## **144MHz MOBILE TRANSCEIVER**

YEAR WARRANTY



£189.75

INC VAT

**EASY TO OPERATE** 

**IDEAL FOR BEGINNER** ND ENTHUSIAST ALIKE

#### **BRIEF SPEC**

- ★ 2 Mtr FM Transceiver
- ★ Supply Voltage 13.2v
- ★ Channel Spacing 25kHz
- ★ Pre-Programmed Channels
- ★ Listen on Input facility for Repeater operation
- ★ TX. Output Power 25 & 5 Watts
- ★ RX, Sensitivity > 0.4uV
- Audio Output 2 Watts


Made in the UK by AKD in association with TOLMER Ltd

& VISA FACILITIES TO ENSURE MINIMUM DELAY

ALL PRODUCTS ARE AVAILABLE FROM US DIRECT ALL AKD PRODUCTS CARRY THE USUAL AKD 2 YEAR MAIL ORDER OR WHY NOT MAKE USE OF OUR ACCESS GUARANTEE. PRICES QUOTED ARE CORRECT AT TIME OF GOING TO PRESS AND INCLUDE VAT

TRADE ENQUIRIES WELCOME TRADE ORDERS CAN NOW BE PLACED BY FAX ON 0438 357591

Props: RT & VEL Wagstaffe. Technical Adviser: John Armstrong G8MVH

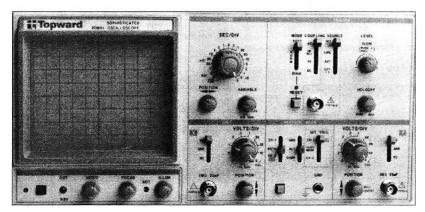

## New Series

This month Fred Judd G2BCX, begins his new series on the oscilloscope, one of the most versatile servicing and testing 'tools' available to the radio enthusiast and professional engineer.

# The Oscilloscope In Your Workshop

The oscilloscope is undoubtedly one of the most versatile of all measuring instruments used in radio and electronics. The 'scope has literally hundreds of applications, yet it is rarely ever used to its fullest extent, except perhaps in laboratories.

The object of my new series is to deal with as many of these applications as possible. The series will include many photographic examples (oscillograms) that may prove useful to both existing and potential owners.

The origin of the 'scope and how it operates, is a story that can be found in many textbooks, including references 1 and 2 at the end of this part. However, a few words about the use of the 'scope and about buying a suitable instrument will be a helpful introduction to oscillography.

#### **Choosing Your 'Scope**

When purchasing a 'scope, it is important to consider what you're going to use it for! You'll also have to consider the other instruments necessary for common applications, e.g., performance measurements and/or fault-finding in audio, radio, video and electronic equipment generally (ref. 3).

Prices of new, modern 'scopes range from around £300 to £3000 or more. Note that those at the top of the price range may have a frequency coverage from d.c. into the GHz region and have a wide range of facilities. These 'scopes are normally regarded as 'laboratory' instruments.

A three-trace 'scope similar to that shown in Fig. 1., will cater for most measurements, tests, and waveform displays, required for even the keenest amateur experimenter. This particular model has a frequency response from d.c. to 20MHz and two Y amplifiers which will accept a.c. or d.c. signals at the inputs.

Other facilities provided on this 'scope include the synchronising of the timebase (from all three traces) from input signals, and from an external triggering signal. Timebase speeds range from 0.5 s/division on the screen graticule (1 division = 10mm) to  $0.2 \mu \text{s/div}$ . It also has a 10 times magnification on each of the 20 calibrated speeds.

Signal magnitudes from 5mV to 5V per/div (10mm) are available over 10 calibrated ranges. The

cathode ray tube (c.r.t.) traces appear in bright green and are of short persistence, which means that the 'green glow' lasts only a short time.

#### **Solid State**

Many oscilloscopes have other useful features, but these and the facilities described above are typical of most 'scopes in the price range £300 to £400. These days, such instruments are solid state except for the c.r.t.

There's a wide range of 'scopes to choose from, so it's important to make a study of the performance specifications and facilities of different models and makes before parting with your cash!

Secondhand (solid state) double-trace 'scopes and older (valved) models, such as a Cossor 1039 MkIII, which is equipped with double-trace and with a.c. or d.c. input Y amplifiers, can be obtained at reasonable prices. However, you should be very wary of any model, however recent, that has been modified for some reason and/or will not function to its specified calibration.

If the calibration is suspect, the measurement of a.c., along with the voltage and current magnitudes of a.c. could be unreliable. There's also the possibil-

Fig. 1. (Heading Pic). A modern but relatively low cost triple-trace 'scope. The unit has a frequency limit of 20MHz. (see text for other performance details). Photo courtesy of Maplin Electronics.

Fig. 2. Waveform 'mark/space' and frequency relationship (see text).

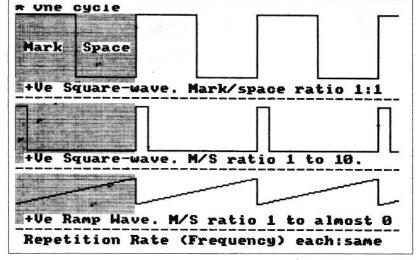


Fig. 3. Oscillogram. (A)
Sawtooth, (B) Square and (C)
Sinewaves. (See text. Time v
Frequency and amplitude
factors).





Fig. 4. Oscillogram. High quality audio amplifier frequency response test with 1000Hz input. (A) Signal at amplifier output as (B) indicates poor low frequency response and as (C) poor high frequency response. (see text).



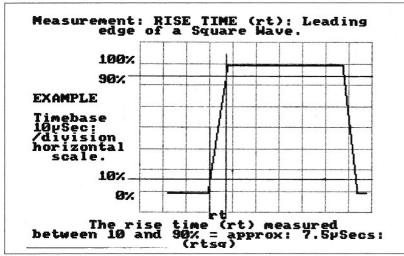


Fig. 5. The 'rise-time' of a squarewave is measured over 80% of the leading edge i.e, between 10 and 90%.

Fig. 6. Oscillogram. Ramp waves are often used as timebase voltages in oscilloscopes. They can be very linear and generated to be (A) negative-going or (C) positive-going. (B) This is the initiating pulse.




Table. 1.

/alue	Sinewave	Squarewave	Triangular-Wave (Isoceles)
Peak : r.m.s.	$\sqrt{2} = 1.4142$	1.000	$\sqrt{3} = 1.732$
r.m.s. : Peak	$1/\sqrt{2} = 0.7071$	1.0000	$1/\sqrt{3} = 0.577$
Peak : Average	$\pi/2 = 1.57$	1.000	2000
Average : Peak	$2/\pi = 00.64$	1.000	0.5000

ity that the visual display of simple and complex waveforms associated with radio, audio and electronic equipment generally, will not be accurate.

A 'scope can also be used in a visual display mode - similar to a v.d.u. - for showing specific events in conjunction with special items of equipment. I'll explain this technique later in the series, but again accurate calibration plays an important part.

#### **Timebase Calibration**

As the timebase calibration of virtually all modern 'scopes is in terms of 'real-time', a close approximation of the frequency, or repetition rate of virtually any waveform, is quite easy to determine. However, the highest frequency that can be measured is bound by the limit of the timebase repetition rate, (horizontal or 'X' deflection) and the frequency response of the 'Y' amplifiers (vertical or Y deflection).

On most 'scopes, the graticule over the c.r.t. screen will have 10 graduations 10mm apart. Each division represents a duration of seconds (s), milliseconds (ms) or microseconds, ( $\mu$ s) depending on the timebase ranges.

On the screen there are usually eight divisions, also 10mm apart, for amplitude measurement in terms of N volts or millivolts-volts per division according to the Y amplifier attenuator ranges (see Fig. 1.). The X and Y channels on many 'scopes can be combined for Lissajou Figure frequency comparison and have what is known as a 'Z' input for signals to provide the necessary display on the c.r.t. screen.

#### Simultaneous Displays

When one or more different, but frequency related waveforms are displayed simultaneously for comparison, it's important to be able to define the mark/space ratio of each and the duration of one cycle. The three different waveforms in the computer-derived illustration, Fig. 2, have the same frequency. So, one cycle of each has the same duration but the mark/space ratio of each is different.

The oscillogram, Fig. 3 (photo of actual display on c.r.t. screen) shows three different waveforms. The timebase speed is 1ms per division, and the three traces each show five complete cycles. One cycle of either has the same duration i.e., 2ms.

The frequency of the waveforms (A) sawtooth, (B), (C) sinewave, is 1000/2 or 500Hz. Assume 1 volt/div for the Y, or horizontal graticule lines, then the amplitude of (A) is 1.75V, (B) just over 1V. Note however, that the amplitude of (C), the sinewave, is 2V. Between the positive and negative peaks, i.e., 2V peak-to-peak.

Note: In a.c. practice, any references to voltages or currents, (unless otherwise specified), is usually taken as being the r.m.s. (root mean square) value. Ordinary measuring instruments - such as your bench multimeter - are normally calibrated in r.m.s. values. Sinewaves however, are displayed on a 'scope in terms of their peak-to-peak amplitudes. Table 1 summarises the principle characteristics of several waveforms (ref. 4).

## **Waveform Applications**

There are many applications for different waveforms. For example, a 1000Hz squarewave was at one time commonly used for checking the performance of high fidelity audio amplifiers. With a lead-

ing edge 'rise-time' of about  $1\mu s$  (one microsecond) squarewave, as (A) in Fig. 4 a squarewave at this frequency also has a harmonic content extending to about the 30th harmonic.

The signal is fed to the input of the amplifier to be tested, but if it appears at the output like (B) suffering differentiation, it indicates a poor low frequency response. Integration (C) is indicative of poor high frequency response. If the squarewave appears at the output with close approximation to its original form, then the amplifier has a fairly 'flat' overall response from at least 20 to 20 000Hz.

The rise-time of the leading edge of a squarewave is also an important factor in certain electronics applications. As in the computer-derived illustration, Fig. 5, where it's measured over about 80% of its leading edge. Modern 'scopes will display a waveform rise-time of 1µs, or less. Note: a.c. (capacitive) coupling in audio or electronic circuitry, can cause very low-frequency squarewaves to become slightly differentiated (sloping top and bottom) if the coupling capacitance value is too low. When measuring this type of signal with your 'scope, it's wise use the 'Y' amplifier d.c. inputs.

#### **Ramp Waveforms**

Examples shown by the oscillogram in Fig. 6, are (A) negative-going and (C) positive-going ramps. The initiating pulse may be a positive or negative-going depending on the circuit.

The negative-going squarewave (B) has an approximate 1ms 'mark' duration. The fairly long risetime of the ramp waveforms is equal to the duration of the initiating squarewave.

Ramp wave-forms are commonly used as timebases for modern solid state 'scopes. The necessary oscilloscope timebase 'flyback' suppression, is often derived from the initiating squarewave. This technique is required to 'blank out' the electron-beam, which provides the glowing 'trace', as it quickly returns to the left of the screen at the end of each 'sweep'.

#### **Valve Timebases**

The most commonly used timebase generator in 'scopes using valves, is the Miller-transitron circuit. This circuit which produces a timebase wave and blanking pulse is shown in **Fig. 7**.

Some earlier valve-equipped 'scopes featured the Puckle timebase and other special circuitry by O.S. Puckle, who was one of the pioneers in this field. Timebase (or X) calibration on most older valved 'scopes, is usually only approximate. Some models may not be calibrated at all.

Quite accurate calibration, or a check on existing calibration, can be obtained with the aid of narrow pulses at known frequencies. Those displayed in Fig. 8, are locked to the timebase and have intervals of 10µs (a frequency of 1 000 000/10 or 100kHz).

The 'scope screen, or graticule, is marked off as shown. This test will also show how linear the timebase is. The oscillogram, Fig. 9, which uses the same calibration as in Fig. 8, and is taken from the Cossor 1039 MkIII valved-equipped 'scope (Fig. 10) shows that the rise-time of the squarewave (S) is very close to  $I\mu$ s.

#### **Gated Time-Markers**

With the aid of suitable circuitry, a given number of time-marker pulses, like those in Fig. 9 (they're often called 'pips') can also be 'gated' so as to start




Fig. 7. Oscillogram. (A) Millertransition timebase with (B) initiating. Commonly used with older 'valved' scopes.




Fig. 8. Oscillogram. Method of calibrating a timebase with narrow marker pulses of known frequency. Example pulse intervals =  $10\mu s$ . (see also Fig. 9 and text).

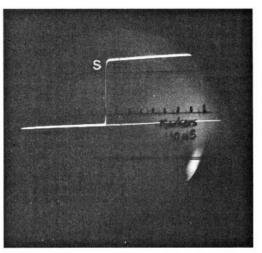


Fig.9. Oscillogram. 10µs markers inked onto uncalibrated graticule. Rise-time of square wave (S) also displayed, is virtually 1µs.



Fig. 10. The Cossor 1039 MKIII doublebeam scope used for the examples Fig. 8 and 9. This model employed valves and the Y amplifier inputs catered for d.c. as well as a.c. voltages. (The cine camera was used to make a demonstration film of oscilloscope applications).




Fig. 11. Oscillogram. (A) Timebase wave. (B) Very short duration (0.5µs) marker pips. (See text regarding a specific application).

coincidentally with an audio or r.f. pulse and still be synchronised with a timebase.

This technique can be achieved with a multivibrator at a suitable frequency, and a flip-flop (one shot multivibrator) or with a 556 timer 'chip'. I used gated time-markers, as in the oscillogram Fig. 11, to obtain very accurate measurements of the velocity of sound in air.

Fig. 12 Oscillogram. (A)
Synchronising pulse for
timebase (B) transmitter (r.f.)
gating pulse and (C) distance
markers. (See text and Fig. 13
regarding application.




Fig. 13. Oscillogram. (TP)
Transmitted r.f. pulse (50µs).
(1F) Echo from the ionospheric F
region.
(GE) Same echo but gated to
eliminate noise etc.
(X) A secondary echo (2F) just
above the receiver noise. See
text for further explanation.





Fig. 14. Oscillogram. (S) Echo from ionosphere (F region). with splitting due to the earth's magnetic field. (magneto-ionic splitting). (G) Superimposed gating-pulse, opened-out so that the whole of echo and some receiver noise is displayed.



The markers and short pulses at audio frequency, were synchronised with the timebases of a v.d.u. and a 'scope. This set-up was then operated in conjunction with a 'sound' transmitter and a special transducer, similar to a microphone, placed at a predetermined distance from the sound transmitter.

The 10 markers in the example, are at intervals of time (t) the total time along the timebase being 10 x (t). If the leading edge of the short pulse from the sound transmitter appeared at the 8th marker for instance, it would have travelled a distance (d) equal to 8 x (t). (Ref. 4)

Marker pips of this nature are also used in radar systems. In this application the time intervals are not only related to the speed of radio waves (300 x 10 6 metres/sec) but must also take into account the double journey made by the transmitter pulses to the 'target' and back to the receiver.

The oscillogram, Fig. 12, shows the time relationship between (A) and the master synchronising pulse (B) and the transmitter (r f) pulse and (C) the Ims interval distance markers of a very long range system. This is briefly described below and is yet another use for a 'gate' circuit.

#### **lonospheric Sounding**

In the oscillogram shown in Fig. 13, I've provided a photograph of an actual display of a radar type r.f. pulse transmission and reception technique used for measuring the virtual height of the ionospheric regions (E, F1 and F2) as well as 'sporadic E' observation.

The transmitted r.f. pulse (TP) of about 50µs and the received echo (1F) on the top trace, indicate an F region virtual height above earth of 375km at the time the photo' was taken. The (1F) echo is gated to appear entirely on its own, as (GE) on the bottom trace with receiver noise and other possible interfering signals completely eliminated.

As the gate pulse can also be moved to any point along the timebase, the second echo, just visible above the noise in the top trace at (x), could also be gated. I should also point out that the signals on the top trace are inverted for convenience. Many 'scopes have this facility.

The width of a gating pulse can also be varied to let through a greater portion of signal as in the oscillogram, Fig. 14. In this example the gate pulse (G) is actually shown, sufficiently 'opened' to accommodate a 'split' echo from the ionospheric F region plus a little receiver noise. The echo is 'split' by the earth's magnetic field (magneto-ionic splitting).

That's the lot for this month, but next time I'll take a look at frequency comparison by Lissajou figures, audio and r.f. amplifier frequency responses using the sweep frequency technique, audio amplifier harmonic distortion and h.f. transmitter monitoring methods using a line sampler.

PW

#### References

1. The Oscilloscope At Work by A. Hass and R. W. Hallows. Iliffe. London 1959.

Good basic material but applicable to older valved 'scopes. Deals with many applications and how the 'scope operates.

- 2. The Radio Laboratory Handbook. by M. G. Scroggie, B.Sc C.Eng, FIEE. Iliffe 1971
- A book for the experimentally-minded enthusiast. It covers laboratory measuring techniques and equipment, including oscilloscope techniques.
- 3. Servicing With The Oscilloscope by Gordon J. King. Newnes-Butterworths. 1976.

  An excellent guide to fault-finding as well as testing the performance of audio and TV equipment using the oscilloscope.
- 4. Measuring The Velocity Of Sound. by F. C. Judd MIOA, M. Inst. E., Assoc: IPRE. International Broadcast Engineer Magazine. Oct 64.

NOTE: The reference books (1, 2 & 3) have been chosen because they contain much basic information often missing in modern books. Although now out of print they are almost certainly available from libraries. There are of course many modern books covering solid state circuitry for special applications in conjunction with oscilloscopes, e.g. low distortion sinewave generators, audio and r.f. sweep frequency generators, 'electronic' gating systems, multi-waveform generators, etc. (see *PW* Book Service)

YAESU O ICOM

Authorised Dealer

# MARTIN LYNCH-G4HKS—

AMSTRAD

STANDARD

**ALINCO** 

THE AMATEUR RADIO EXCHANGE CENTRE

Authorised Dealer

286 Northfield Avenue, Ealing, London W5 4UB. Tel: 081 566 1120 Fax: 081 566 1207

Now is the time to introduce the "STAFF" at the EXCHANGE CENTRE. You remember VALERIE, G4WIS. "WIS" has been with me for years, (she must have the patience of a saint!). Valerie helps with all the administration, invoices, answering the phone and lots more. The latest editions to the merry band are GRAEME G4XOF and CHRIS G8VDQ. Graeme helps with the continuing onslaught of SALES ENQUIRIES both in the shop and mail order, whilst Chris plods on sorting out all those niggling faults with your rigs and accessories. Yes, we do offer unbeatable service for faulty equipment, both in price and turn-around times. The final lady is JENNIFER, she stays in the background paying all the suppliers and sorting out the books - don't envy her job one bit!

I have been very careful in choosing people who understand your requirements. As you can see, the "FRONT LINE" are **ALL Licensed** and active in the hobby. We are certainly growing. This is due to the continued support from customers old and new. The atmosphere in the shop is more reminiscent of a popular radio club - you are not pressurised into buying anything. There are **rows of equipment NEW and USED**, all permanently wired for demonstration, or just plain "fiddling" with. (The National Grid dips when the benches are turned on!). If you cannot visit the busiest EXCHANGE CENTRE in the U.K., don't worry. We can send you our stock lists by return. Just phone, write or fax for your copy.

I'm surrounded by Motorways, including the M1, M40, M25 and M4. I am the closest store to Heathrow by Tube, just jump on the Piccadilly line and I am across the road from NORTHFIELDS UNDERGROUND. Pop in and see for yourself the ever changing range of equipment new and secondhand, all guaranteed and ready to TAKE AWAY. (Bit like FISH & CHIPS really). Every item is available MAIL ORDER. I am still paying top prices for your USED EQUIPMENT - phone and discuss your requirements.

On a final note. You probably think that West London Emporiums have gone O.T.T. on the **COFFEE frontier**. **Martin Lynch** at least serves his in cups and not on the counter. I also found it amusing to have fifteen or so operators, requesting the availability of their favourite biscuits in the shop on the local repeater the other day ...

73 Martin G4HKS

Martin Lynch is a Licensed Credit Broker. Full written details upon request. Typical APR 36.8%.

PHONE 081 566 1120

VISA





For fast mail order Tel: 081 566 1120 Please add £10 for 48 hour delivery.

Shop opening hours: Tuesday - Saturday 10 - 6pm. 24 hour Sales HOT LINE 0860 339 339 (After hours only). Fax order line open 24 hours.

# C.M.HOWES COMMUNICATIONS


Mail order to: EYDON, DAVENTRY





NORTHANTS NN11 6PT Tel: 0327 60178

# ACTIVE ANTENNA

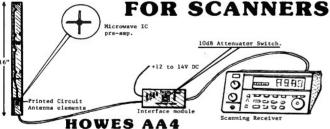

The **HOWES AA4** Active Antenna gives full coverage from 25 to 1300MHz. It is designed to be the ideal solution for those requiring a compact, broadband antenna for use with scanning receivers. The AA4 features advanced technology with a low noise microwave IC amplifier.

- ★ Fully broad-band covering 25 to 1300MHz.
- ★ Low noise microwave IC (NF <3dB). Over 15dB gain. IP3 +15dBm.
- ★ Coax powering 12 to 14V DC at less than 20mA
- ★ 10dB switched attenuator on the receiver interface board.
- ★ 16 inches long, 1.2 inches wide. Easy to build kit or ready built modules.

If your scanner reception could benefit from the addition of a remotely located antenna, or you would like a much neater, more compact alternative to the ugly discone types, then the **HOWES AA4** could be just the job! You can read the review in the November '90 Short Wave Magazine.

Excellent performance in a small space!

AA4 Kit: £18.80

Assembled PCB modules: £24.90

## AA2 ACTIVE ANTENNA for 150kHz to 30MHz

The **HOWES AA2** is the active antenna to use for general coverage HF reception. Broad-band performance that does not tail off at the higher frequencies. The neat, compact answer for those with limited space, holiday use, mobile operation etc. Two selectable gain settings, local or coax powering (12 to 14V). IP3 +38dBm. Easy to build and much liked by customers!

AA2 Kit: £7.50

Assembled PCB: £11.50

## HF SSB and CW RECEIVERS

Our range of simple, but very effective receivers opens up the world of long distance radio communications for a very modest outlay. Most of the kits listed below are designated for use on various amateur bands. Give us a ring to discuss your requirements for frequencies not shown here.

The kits contain the electronics to build the receivers. "Hardware packages" contain the mechanical items (case, dial, knobs, sockets etc) to go with the "works" supplied in the basic kit. In addition, all our amateur band receivers have **matching transmitters** to suit the **Novice** and full amateur licence. These can be combined with other kits to form complete transceiver projects.

SSB/CV	V RECEIVERS	Kit Ass	sembled PCB
DXR10	3 Band (10,12 & 15M) for DX amateur work	£24.90	£36.90
DcRx54	4.45MHz Aircraft band (rescue etc)	£15.60	£21.50
DcRx20,	40 or 80M Single band amateur receivers.	£15.60	£21.50
DXR10 H	ardware package: £14.00	DcRx Hardare p	ackage: £15.50
RECEIV	ER ACCESSORIES		
CBA2	Buffer to enable use of DFD5 counter	£5.80	£8.90
CSL4	Sharp, dual bandwidth (SSB & CW) filter	£9.90	£15.90
DCS2	"S Meter" kit for above receivers	£8.90	£12.90
DFD5	Digital frequency counter/display	£39.90	£59.90
XM1	Crystal Calibrator, 8 marker frequencies	£16.80	£21.90

### CV100 - ADD SHORTWAVE TO YOUR SCANNER!

This kit converts 1 to 40MHz up to 101 to 140MHz so you can tune these frequencies with a normal VHF scanner. No mods to the radio are needed.

CV100 kit: £25.90 Assembled PCBs: £35.90

PLEASE ADD £1.20 P&P to your total order value.

**HOWES KITS** are produced by a professional RF design and manufacturing company. They contain a good quality printed circuit board with screen printed parts locations, full clear instructions and all board mounted components. Sales and technical advice are available by phone during office hours. Please send an SAE for our **free catalogue** or specific product data sheets.

73 from Dave G4KQH, Technical Manager.

# Reflections

# The Mid-Sussex ARS. Twenty Five Years and Going Strong

This month, I give pride of place to the Mid-Sussex Amateur Radio Society who held their 25th AGM in January. For at least 15 of those years I have had the privilege of being one of their honorary life members. Although I have a poor attendance record at their meetings I'm kept informed about the club's activities through their journal Mid-Sussex Matters. Believe me, they are a super bunch of people and a great credit to the amateur radio movement which they support as a group and individually in so many ways. Congratulations Mid-Sussex ARS, you've all done a grand job!

## **Program Description**

The word 'Reflections' was among the first I called up on a thesaurus program, after it arrived from the Computer Shopper magazine. It offers as alternatives the words 'thought', 'image', 'observation' and 'study' which, in my view, describes the prime objects of this column. Let's start with a 'thought' for the early cycle and wireless mechanics and dealers who laid the foundations of the radio industry that we know today.

#### Earning With Enthusiasm

The man at the wireless shop in the 1920s was looked upon as the local genius. This was because he could put a number of parts together that would bring voices and music into the home, 'without wires' from far away places. In addition, this often 'one man band' enterprise earned his living by erecting antennas, making cabinets, charging accumulators, selling 'dry' batteries and wireless parts. He also often maintained stationary engines, domestic wiring and showed cartoons and 'one reelers' at childrens' partys with a trusty old 'GB' 16mm cine-projector.

It was one such man, an uncle, who gave me the bits in 1940, when I was 10 years old and encouraged me to build a single valve receiver. That set was my pride and joy for a long time. The receiver had one coil and tuned somewhere in the short wave bands. It needed a 2V accumulator and a 120V high tension battery to provide power. How could I be expected to sing in the choir on Sundays or concentrate on anything else for that matter, when my mind was on the numerous stations to be found amid the oscillations on this 'magic' box?

I can honestly say, that of all the super equipment that I have owned and serviced since, nothing has given me the same thrill and wonderment. I remember hearing 'Lili Marlene', no doubt being sung to the German forces, entering my headphones. All this was via a handful of components secured to a base-board with wood-screws and carefully shaped interconnecting wires around the terminals.

#### The image

I was about 18 months old when the famous F. J. Camm launched *Practical Wireless* and 1 first bought a copy some years later, when I could spare the 4.5p which it cost then, from my total earnings of 12.5p for all-day Saturday delivering greengroceries on a 'trades' bike. At the age of 13, I began working on Saturday mornings for a cycle and wireless shop and my income increased, to 15p, for less work. When I left school at 14 they gave me a fulltime job starting at 75p per week. Throughout the late 1940s, Practical Wireless, Short Wave Magazine and Wireless World carried adverts for brand new warsurplus radio and RADAR receivers and transmitters, test-gear and a host of accessories all at a fraction of their original cost. For many years these magazines kept up their image of assistance to readers, by carrying articles, publishing circuits and suggesting modifications to surplus gear. These included such famous receivers as the AR88 BC342, MCR1, R107, R1116 and R1155 and transmitter/receivers like the B2, TR9, WS-18, 19, 38, 46 and the Canadian 58 infantry set. The 58 was one of the first pieces of WWII equipment to use the 1.4V minature glass valves, which are shown standing between the set and a large ex-RAF transmitting valve in Fig. 1. Wartime sets like this are much sought after today as collectors

items and are fetching amazing

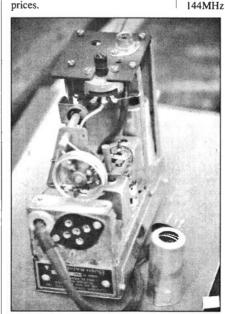


Fig. 2: VHF Converter made by Bush.

## Shortening Wavelengths

The 1950s saw the opening of the v.h.f. bands for both amateur radio and domestic broadcasting Our various magazines once more devoted several pages each month to updating and helping readers in this new area of activity. They reviewed such a.m/f.m. communications receivers as the Eddystone 770R, and later, the exmilitary R216 (both covering 19 to 150MHz in several bands). They also looked at a variety of domestic radio and television sets with additional ranges in Bands II (88-100MHz) and III (175-220MHz) respectively. The editors gave space to the rapidly growing selection of beam antennas for the new bands along with the associated feeder cables, masts and fittings, ranging from clamps to coaxial connectors. Many of us did our spade-work and learnt a great deal during the 1950s and early 60s about v.h.f. techniques and propagation as the technology matured.

#### Study

The field of v.h.f.
communication was a fresh and
exciting area for radio enthusiasts to
study. Many amateurs built crystal
controlled transmitters for the
144MHz band and made converters

so that their station work-horse, the communications receiver, could be accurately tuned between 144 and 146MHz.

This was the era of converters and a variety were manufactured so that existing broadcast sets could receive the new BBC stations in Band II. Viewers with early televisors could then receive the stations in Band III. In most cases the antenna socket of the existing equipment became the intermediate frequency input for the added v.h.f. tuner, while the set worked on its original

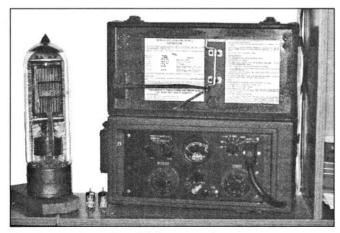


Fig. 1: The Canadian 58 Set.

# R. N. Electronics



AT N.E.C.

**Professionally Designed Equipment for Amateurs** TRANSVERTERS

## FOR 6m & 4m

All transverters individually tested to meet this high specification Intermod: < -32dB Second Harmonic: < -70dB Sourll: < -60dB Noise Figure: <2.5dB

Drive levels: 2m I.F. 0.5-3W or 10W using 7dB switched Attenuator 10m l.F. 10mW-100mW or 100mW-1W or 1W-10W

● 144/50MHz	25W p.e.p	£199	+	£4	p&p
● 145/70MHz	25W p.e.p	£249	+	£4	р&р
● 145/70MHz	10W p.e.p.	£199	+	£4	p&p
● 28/50MHz	25W p.e.p.	£209	+	£4	p&p
● 28/70MHz	10W p.e.p.	£209	+	£4	p&p
NEW 6M-4M	Transverter 10W p.e.p	£209	+	£4	p&p
NEW 137MHz	Receive Preamp	£29	+	£2	p&p
NEW 1690MHz	Low Noise > 0.7dB GaAs Fet				10.4
	receive pre-amp. Gain 22dB	£95	+	£2	p&p

#### **MASTHEAD PRE-AMPLIFIERS**

MASTREAD PRE-AMPLIFIERS
Low noise GaAs FET design. SPECIFICATION: Gain 12dB. Noise figure:
TYP .8dB 200W POWER HANDLING for 50MHz, 70MHz, 144MHz,
432MHz, 934MHz. £109 + £4 p&p.
100W POWER HANDLING for 2m, 4m, 6m. £75 + £4 p&p.

INDOOR PRE AMPLIFIERS
100W power handling (50W) RF sensing for 2m, 4m, 6m. £38 + £2 p&p
POWER AMPLIFIERS

50-52MHz 25W p.e.p. output 0.5W-3W drive including low pass filter ideal for FT690 £75 + £4 p&p MET ANTENNAS

50MHz 3 el. £49.40, 5 el. £74.00, 70MHz 3 el. £42.90 p&p £4.50

#### PROFESSIONAL SERVICES IN RF DESIGN AND EMC TESTING



1 Arnolds Court, Arnolds Farm Lane, Mountnessing, Essex CM13 1UT Tel: 0277 352219 Fax: 0277 352968 All prices include VAT





## Government Communication Headquarters

Government Communications Headquarters (GCHQ) are specialists in all aspects of communications, from DC to light. We require skilled and motivated staff to undertake a wide range of duties to study these communications. As a Radio Officer you would be an essential part of our technical team, and would be trained to undertake a wide range of duties.

- We offer excellent training
- Attroctive salaries (reviewed annually)
- Opportunities far moves within the UK and overseas
- Job Security

- Good career prospects
- Challenging and various work
- Generous leave allowance
- Non-contributory

Pension Scheme

To qualify you need or hope to obtain a BTEC National Diploma (or HNC/HND) in a Telecommunications, Electronics Engineering or similar dicipline. Special consideration will be given to applicants holding an MRGC Certificate. The C&G 777 (advanced) or other qualification incorporating morse skills would be advantageous but not essential.

You can apply if you have a minimum of 2 years recent radio operating experience and preferably be capable of receiving the morse code.

Age limit for experienced Radio Officers 18-45. Age limit for candidates who do not possess the full range of skills 18-40 (depending on background and experience). Training Period: Between 29-52 weeks.

Salary after training (over 5 years) £13,756-£19,998 with prospects for further promtion. Salaries include an allowance for shift and weekend

#### GCHQ is an equal opportunity employer APPLICANTS MUST BE BRITISH NATIONALS

For further information and application form contact: Recruitment Office, Room A/1108, GCHQ Priors Road, Cheltenham, Glos, GL52 5Aj or telephone (0242) 232912 or 232913







All sizes available. Cash with order. Allow 3 weeks delivery.


Colours available: white, red, navy or black.

T-shirts: £10.50 plus p&p S/shirts: £16.99 plus p&p For personalised t-shirts and sweatshirts

## ogo-Mot

70-72 Brunswick Street, Stocktonon-Tees, Cleveland, TS18 1DW Tel: (0642) 677939 for more info.

Please mention **Practical Wireless** when replying to advertisements




New

for 1991

# Castle Electronics

## SUPPLY, REPAIRS AND SERVICING OF AMATEUR PMR. RADIO COMMUNICATION EQUIPMENT



- ★ Experienced Technical Staff.
- ★ Guaranteed 7 day turnround. (Subject to availability of Spares).
- ★ Trade Service Enquiries Welcome.
- ★ Carriage arranged.

Unit 3, Baird House, Dudley Innovation Centre, Pensnett Trading Estate, Kingswinford, West Midlands D76 8XZ Telephone: (0384) 298616. Fax: (0384) 270224.



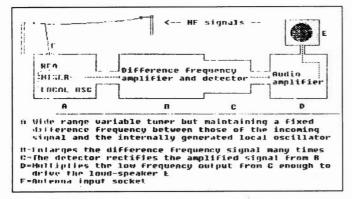


Fig. 3: Fundamental Superhetrodyne Receiver.

frequency setting.

The British Company, Bush Radio Ltd., made a two-valve Band III converter, type 184 - shown in Fig. 2, specifically for their own early receivers. The valve under the screening can at the rear is the r.f. amplifier and the one in the foreground, with the can removed, is the combined mixer and local oscillator.

The fundamental layout of a superhetrodyne and the basic principles of conversion. exaggerated in Figs. 3 and 4 respectively, are also intended to help newcomers with their studies of receiver techniques. Let us assume that the variable 'front-end' in Fig. 3 tunes from 10 to 30MHz and the makers decided to use a difference (known as intermediate) frequency of 500kHz (usually 465kHz). At the low frequency end, the local oscillator would be running at 9.5MHz and at the high end it would be 29.5MHz. Therefore, whatever frequency is selected within this range, the mixer will always offer a 500kHz signal to the difference frequency amplifier.

The intermediate frequency amplifier must always be well screened. This is to stop signals which are normally transmitted at the difference frequency, being picked up spoiling the reception of the wanted station. This is known as i.f. breakthrough. If we now tune this superhet to 28.5MHz, Fig. 4, and disconnect the antenna and replace it with a screened lead carrying the output from a v.h.f. converter, our imaginary receiver becomes a sophisticated intermediate frequency amplifier.

Let's imagine that the converter shown in Fig. 4, is designed to receive and amplify signals between 144 and 146MHz, using a crystal controlled local oscillator to send a fixed 116MHz signal to the mixer. The difference will be 28MHz (144-116 = 28), which means that 28MHz on the dial of our receiver will be 'changed' to 144MHz. Now this is where the sophistication comes in - we can now (if we wish) vary, not the oscillator, but the intermediate frequency and dial

readings of 29MHz (145-116 = 29) and 30MHz (146-116 = 30) which are converted to 145 and 146MHz respectively. The pointer in Fig. 4 is now representing 144.5MHz. Once again it is important that the line coupling the output of the converter to the input of the receiver is very well screened. This is to avoid any unwanted signals being picked up between 28 and 30MHz, especially when the 28MHz band is 'lively'.

Other frequency combinations can be used, for instance, my radiotelescope monitored 136MHz. I then used a 110MHz local oscillator in the converter and tuned a communications receiver to 26MHz. You will get a better idea of what's available by taking a look at the various converters supplied by the various advertisers in PW.

#### **Observations**

The major aurora, which lasted from about 1730 on November 27 to 0054 on the 28th 1990, was seen in various forms from Herstmonceux in Sussex, County Clare in Ireland and several parts of Scotland. Doug Smillie (Wishaw) logged tone-A signals on 50 and 144MHz from stations in France and the UK from 1540 to 1900 on the 27th. Around 1900 on the 28th, he noted weak auroral effects on the signals from the beacons v.h.f. GB3LER and GB3RMK. Auroral reflected signals were also logged

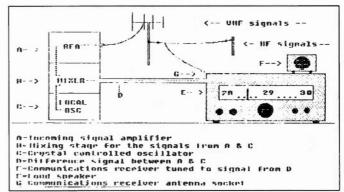


Fig. 4: Conversion Basics.

by Tony Hopwood (Upton on Severn) on the 27th, 28th and 30th. The magnetometry reports received from Neil Clarke GOCAS (Ferrybridge), Tony Hopwood, Karl Lewis (Saltash), Ron Livesey, (Edinburgh), David Pettitt (Carlisle) and Doug Smillie all gave storm conditions on the 27th.

During December, Ron Livesey, the auroral coordinator for the British Astronomical Association, received reports of visual aurorae from observers in Scotland for the overnight periods on the 8, 12th, 13th, 18th, 21st, 24th and 26th. In his observatory, Cmdr Henry Hatfield (Sevenoaks) uses converters for the 'front-ends' on both of his radio-telescopes. During January he recorded individual bursts of solar noise, on 136MHz, on days 7 and 11 and February 1 and on 1297MHz on days 12 and 17 and February 1. There is little doubt in my mind that some of the January activity was associated with the large sunspot group, Fig. 5, observed and drawn by Patrick Moore, with the special apparatus. at his observatory in Sussex at 1135 on the 14th. While this group was visible, Henry Hatfield recorded a violent radio burst at 136MHz at 1525 on the 11th and, with his spectrohelioscope, saw a large quiescent prominence on the eastern limb of the sun at 1445 on the 13th.

Ern Warwick (Plymouth) found the 28MHz band 'dead' at

1630 on the 16th, noted very fast fading on the signals from the beacon VK2RSY on the 1st and echos on the beacons DF0AAB on days 1, 2, 5, 10 and 20; PY2AMI on the 10th and WA4DJS on the 2nd, 5th, 9th and 10th. You can never be sure whether 'echos' are due to auroral or abnormal ionospheric propagation, or both, anyway, whichever, they are always worth a mention.

#### Tropospheric Observations

The recording chart on the Short & Mason Barograph, installed at my home, showed the atmospheric pressure fluctuating between 29.5in (998mb) and 29.9in (1012mb) from January 1 to 1800 on the 11th. At midnight on the 11th, it took off to reach 30.5in (1032mb) by 1000 on the 12th and fell again slowly to 30.3in (1026mb) by 0600 on the 14th. The pen then hovered around 30.2in (1022mb) until 0600 on the 18th when it rose sharply to 30.55in (1034mb) and remained there from 2200 on the 19th to midday on the 28th. The pressure was then a fairly steady average of 30.3in through to the 31st. While the high pressure was falling on the 28th/29th, Geroge Garden (Edinburgh) took his broadcast DX gear to a high point on Cairn O' Mounth. He heard BBC Radios York and possibly Leicester, ILR 'Borders' on Band II and a weak monochrome picture from the Caldbeck transmitter (near Carlisle), on Ch. 34 and coloured pictures from ITV Borders (Selkirk) on Ch. 59 and TYNE TEES (Chatton) on Ch.49, in the u.h.f. band.

Don't forget to write to Ron if you are interested in Propagation, Meteorology and the more specialised radio observations.

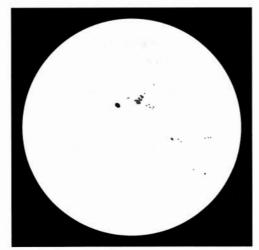


Fig. 5: Sunspot Group.

Reflections =

## CAP.Co AS-305R

## Remote Antenna Switching Unit

With their various products, CAP.Co have earned themselves a reputation for innovative design. Mike Richards G4WNC, looks at their new AS-305R remote antenna switching unit.

The AS-305R has been designed to fill a gap in the market for a good quality antenna switch that can be mounted remote from the shack. The need for this has been generated by antenna systems like CAP.Co's own magnetic loop antennas. When using this form of antenna however, more than one antenna is required to cover all the h.f. amateur bands.

Although you could provide antenna switching back at the shack, it would obviously be much neater if you could mount the switch remotely. You would then only need one coaxial feed from the shack to the antennas - saving many expensive feeder. 'runs'.

This is where the AS-305R comes into its own, as it provides the much needed remote switching. The AS-305R consists of two smart die-cast boxes, one of which is mounted close to the antennas, while the other controls the switching from the shack.

There's a bonus, as the unit is designed to work with other antennas as well as CAP.Co's own products. Anyone who uses or experiments with antennas mounted close together will find it useful.

### **Connecting Up**

The instructions for the AS-305R were supplied on two A4 sheets. The first sheet gave some background information on the development of the unit

Also included was a specification and a simple operational guide. The second sheet contained a series of four drawings illustrating the control connections to both the base and remote units.


In use, the base unit containing the switch and indicators is mounted in the shack while the remote unit is mounted next to the antennas. Linking the two units requires a single coaxial feeder and a sixway multi-core cable.

Fortunately, a 15m length of multi-core cable was supplied, so the interconnection was simplified. Wiring-up of the multi-core cable was very straightforward, thanks to the provision of screw terminal strips inside both units.

In my opinion this was far better an idea than fancy plugs and sockets, as the terminals provided a sound mechanical and electrical connection. This is particularly relevant to the remote unit, as that may have to stand both extremely high and low temperatures.

#### **Extra Protection**

Weather-proofing of the multi-core cable was provided by a plastics grommet for the cable entry on both the base and remote units. The only problem I found, was that the grommet diameter

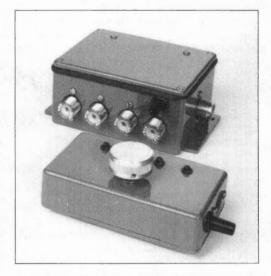



was too large for the supplied cable. This meant that some additional weather-proofing would be required at the remote unit.


Another problem I encountered was with the rubber seal on the lid to the remote unit. On the review model, this seal proved to be very difficult to replace after terminating the multi-core cable.

Although the remote unit was clearly designed to be mounted out in the open, I think it would be wise to provide some protection from the elements. One good reason for this is the use of SO-239 sockets for the antenna connection. Although rubber seals were used where the sockets interfaced with the case, PL-259 plugs are not weather-proof and so would need additional protection.

Probably the simplest way to bring the weatherproofing up to the required standard would be to invest in some self-amalgamating tape. This could be used to protect the coaxial connections and the multi-core cable entry. It also could be used to provide additional protection for the lid seal.

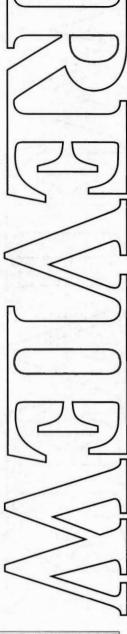

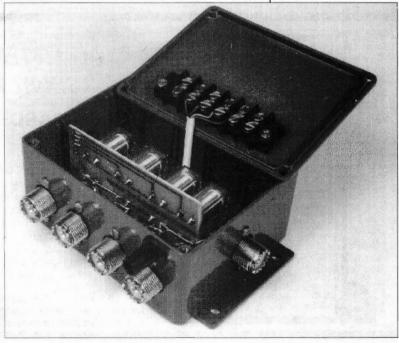

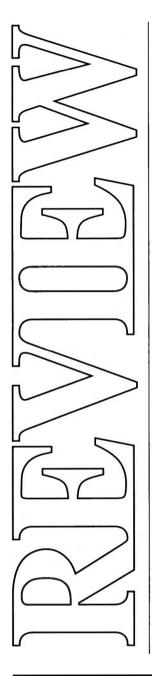

#### **Power Supply**

The final connection required was a power feed to energise the relays. The connection was made using a DIN speaker plug on the side of the base unit. The power requirement was a modest 12V at a maximum of 100mA. Although this supply needed to be limited to 13.8V maximum, it didn't need to be regulated.


### **Simple To Operate**

Operation of the AS-305R was really simplicity itself. All that was required was to rotate the selector switch to the desired antenna. Indication of the switch position was given by four high brightness l.e.d.s on the base unit. Besides the

four positions for antenna selection, there was a fifth position that grounded all the antennas.

Another interesting feature was the inclusion of static and lightning protection. This was achieved simply by grounding all antennas when the d.c. power was removed from the switching unit. This principle was, in fact, extended so that all except the selected antennas were grounded.

If you use compact antennas that are located close together, this feature could be particularly useful. By grounding adjacent antennas, the inevitable interactions are kept to an absolute minimum.

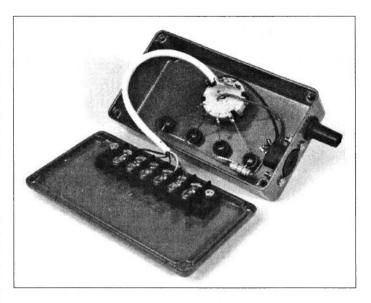

## **Specifications**

Power handling:
Frequency range:
Through loss:
Power requirement:

3kW p.e.p. 1MHz to 160MHz Less than 0.04dB 12V d.c. Max. 100mA

Input & output

Sockets: SO-239

Dimensions:

Base unit: Remote unit: 113mm x 62mm x 55mm 140mm x 103mm x 57mm

## Summary

The AS-305R is certainly a neat and very useful accessory. When assessing it's value, you should also consider the amount of feeder saved as well as the operational convenience you'll be gaining.

The quality of construction was generally very good, but prospective buyers would be well advised to provide some additional weather-proofing on the external unit.

The AS-305R costs £85.50 inclusive of postage and packing and can be obtained from CAP.Co Electronics Ltd., Unit 28, Penley Industrial Estate, Penley, Wrexham, Clwyd LL13 0LQ, Tel: (0948) 74717. I would like to thank CAP.Co for the loan of the review model.



# ALL LISTENERS SHOULD READ SHORT WAVE MAGAZINE

## IN THE MARCH ISSUE ON SALE NOW

- \* Greyline DXing Hints on using the twilight zone to DX Tropical Band stations.
- \* GEOCLOCK Review of a PC computer program for predicting the extent of the Greyline.
- \* ICS-FAX Software reviewed by Mike Richards.
- \* The Russian Woodpecker Fred Judd takes a look at the current position of this interference generator.
- \* The Pye 3017A (Export) Richard Q. Marriss tells how he acquired and restored this valved radio while living in the Sates.
- \* The R210 Revisited C.M. Lindars recounts his conversion of this popular ex-MOD receiver for mains operation.

PLUS - all the regular features on Airband, Scanning, Weather Satellites, Data Modes, Utility Stations, Long Medium & Short Wave Broadcast Stations, Satellite Television, Propagation, Amateurs and DXTV.

## TX-3 RTTY CW ASCII TRANSCEIVE

High performance, low cost. Unbeatable features. BBC, CBM64 tape £20, disc £22. SPECTRUM tape £35, +3 disc £37 inc adapter board. VIC20 RTTY CW program tape £20. All need our TIFI interface or a

## **GX-2 FAX SSTV TRANSCEIVE**

All modes of FAX and colour/mono SSTV. Review in March 90 Amateur Radio, BBC only, Complete system only £99 or £119 with FAX direct printing option.

#### RX-8 MULTIMODE RECEIVE SYSTEM

Fax to screen and printer, colour SSTV, HF and VHF PACKET, RTTY, AMTOR, CW, ASCII, UoSAT. Every feature. Full disc, printer support. Reviews Oct 89 Ham Radio Today & March 90 Amateur Radio. BBC only. Complete system only £259. DISCOUNT for RX-4 users.

## RX-4 RTTY CW SSTV AMTOR RECEIVE

Still a best-seller. BBC, CBM64 tape £25, disc £27. VIC20 tape £25. SPECTRUM tape £40, +3 disc £42 inc adapter board. All need our TIFI interface. SPECTRUM software-only version £25. TIFI INTERFACE for best HF & VHF performance with our software. Kit £25, readymade & boxed £40. Only with TX-3 or RX-4 software.

## APT-1 WEATHER SATELLITE MODULE

Converts satellite signal for display on any FAX system. £59. For use with RX-8, all connections included and price only £39 if ordered at same time as RX-8.

#### FAX AND WEATHER SATELLITES

Full resolution charts and greyscale pictures from any SPECTRUM computer to a dot matrix printer. FAX £80 or WX SATS £99, both

Also MORSE TUTOR £6, LOGBOOK £8, RAE MATHS £9 for BBC, CBM64, VIC20, SPECTRUM. BBC LOCATOR

with UK, Europe, World maps £10. All available on disc £2 extra.

Full info available on everything. Please ask. PRICES INCLUDE VAT ANO P&P BY RETURN



technical software (P.W.) VISA



Fron, Upper Llandwrog, Caernarfon LL54 7RF Tel: (0286) 881886.



## Collector's ISSUE 1 NOW ON SALE

The NEW & USED Equipment Costing Guide is dedicated to amateur radio enthusiasts, to the importers and dealers in radio equipment, radio magazine publishers and editors, and most of all to you, the user...

Publishing schedule

5 July 1991, 8 November 1991, 6 March 1992 and thereafter quarterly

Subscription Rate: Next three issues £11.50 p&p FREE Europe: £15.00 p&p FREE: USA & Canada (enquire)



Published by: TECHNOLOGY PARTNERS P.O. Box 82, Lytham St Annes FY8 2EN Tel: 0253 62925 · Fax: 0253 798006



Produced by and for Radio Amateurs



## SUREDATA AMSTRAD REPAIR AND SECOND USER SALES

The nice thing about PW readers is that they tell us that they've seen our ad in PW, which means our hard earned cash is well spent. So keep on phoning even if it's only to say "Hallo". The shelves are looking a little bare after Pickets Lock, so now is the time if you want to sell us some surplus Amstrad gear. We still have some PC1512 SD/MM at £249 including VAT with a 3 month warranty. Don't forget our AMSTRAD REPAIR service, its our main business. We take cash and plastic. So pick up the phone and let us help you.

73 John G3TLU

SUREDATA TELEPHONE: 081-902 5218

DEPT PW, UNIT 5, STANLEY HOUSE, STANLEY AVENUE, WEMBLEY, MIDDX HAO 4JB (opposite Dorothy Avenue)

## Having difficulties with RAE MATHS?

PWT Electronics have produced a 3 hour video on "RAE Maths ONLY" to help with the RAE Exam. ALSO: RAE COURSE on video. Contains nearly all you need to know for the Radio Amateurs Examination.

Both videos £25.00 each incl. p&p. VHS only. PWT Electronics, 21 Elmbank, Buckfastleigh, Devon TQ110DN



WITH OUR EVER INCREASING SALES OF SECOND-HAND EQUIPMENT - WE ARE ALWAYS ON THE LOOKOUT FOR NEW STOCKS - SO BEFORE PARTING WITH THAT MUCH LOVED RIG, GIVE US A RING AND WE WILL MAKE YOU AN OFFER.

ALSO WE WILL SELL YOUR EQUIPMENT ON A COMMISSION BASIS - THAT WAY YOU MUST BE BETTER OFF, PHONE US AND ASK FOR DETAILS, OUR NEW FACILITIES INCLUDE CAR PARKING AT REAR AND LOTS OF FRESH COFFEE ON THE COUNTER.

REMEMBER WE GIVE GUARANTEES WITH **OUR SECOND-HAND RIGS.** 

ARE Communications Limited, 6 Royal Parade, Hanger Lane, Ealing, London W5A 1ET. England Tel: 081-997 4476 Fax: 081-991 2565

> Opening Hours Monday-Friday 9.30-5.30 NOW OPEN SATURDAY 10.00-5.00pm Car parking at rear of shop.





5 Clarendon Court, Winwick Quay, Warrington WA2 8QP Tel: (0925) 573118

All products British made & Guaranteed for 2 year

## A small self-contained unit that decodes Morse & RTTY without using a computer. Displays text from amateurs, Press Agencies, Shipping, etc. Selectable shifts & auto baud & polarity. BP34 AUDIO FILTER £99.50

Simply the most powerful active filter you can buy. 34 Orders of filtering removes noise & interfering signals allowing you to hear the weak DX. A must for keen CW OPS, contest groups, etc. Exceptionally flat passband is ideal for data & cleaning up FAX signals.

ALL PRICES INCLUDE VAT & POST/PACKING.



## SRW KILOWATT LOUDENBOOMER

400 Watts output on all 9 H.F. bands. Internal mains P.S.U. Total Weight 6Kg. Only 14" wide, 10"deep and 5"high. Fits on MFI desk! Matches FT747 etc. Drive with any 50 to 100 watt output rig. RF or hardwire switching. The power gain of a beam, on <u>all</u> the bands. At least 2 's' points!
Only £561 + VAT. For more details contact Steve Webb, G3TPW at:

S.R.W. COMMUNICATIONS Ltd.,

Astrid House, The Green, Swinton, MALTON, North Yorkshire YO17 0SY Tel: (0653) 697513.

## Construction

You can sharpen up the response of your 430MHz HB9CV Antenna. Tony Martin G4XBY, tells us how it's done.

## A Six Element Experimental HB9CV

The HB9CV antenna, which may be bought so cheaply at rallies, is a splendid antenna for starting on any of the bands. I have seen variants for bands between 28 and 1296MHz. The latter type was a home-made version, but seemed to function well.

The major grouse about the antenna, is the very wide beamwidth. If you refer to the drawing in Fig. 1, which is a representation of these characteristics for the antenna you'll see what I mean. This wide beamwidth characteristic tends to leave it with two distinct 'minus' points, which are, low forward gain and difficulty in 'nulling-out' interference. I decided to set about modifying the antenna to improve both of these areas.

#### **Back To Basics**

To find out how the HB9CV antenna might be improved I had to refer back to several books on antenna theory (‡ see below). Looking into the theory of the Yagi antenna, it appeared that a six-element design would give the best improvement for

cost. The design shown in Fig. 2, is the result of this work. You should strip the antenna down, or if new, leave it untouched for the moment.

#### Construction

All the new elements are made from 8mm diameter seamless aluminium tubing. A single length of about 1.2m is sufficient to make all four directors D1 to D4. You should cut and trim the individual directors to the lengths shown in Fig. 2. The next step is to mark and drill each element at the exact mid-point, with a hole just large enough to allow the 3mm screws to pass through.

#### **Caution Needed**

If you are stripping the original antenna, take care to leave the original feed lines as they were. Otherwise just follow those instructions to make up the antenna, but build it on the new, longer, boom.

Starting about 20mm back from the forward end of the boom, mark and drill the four 3mm holes that will hold and retain the director elements. Mark and drill the hole for the forward element of the HB9CV antenna. Use the original antenna to measure the spacing for the rear of the two driven elements.

To finish off, either use end-caps on all the elements and boom, or wind a little self-amalgamating tape around each element to seal them from the effects of the weather.

## **Setting Up**

Arrange to set up the antenna well away from surrounding objects, and with as clear a forward path as possible. The setting of the trimmer capacitor is now a little more critical and you should take time to set it up carefully.

Use a suitable frequency in the 430MHz band and preferably f.m. Also use the minimum power to provide a reliable reading on the v.s.w.r. meter. You should then carefully adjust the variable capacitor to give the lowest v.s.w.r. reading. Elevate the antenna as high as possible and check that the v.s.w.r. remains low. All that remains to be done is to place the antenna into the working location.

**‡ Further Reading** 

VHF-UHF Manual, RSGB Publications (ISBN 0 900612 31 2)

Beam Antenna Handbook, Orr and Cowan, Radio Publications (USA) (ISBN 0 933616 04 X)

All About VHF Amatuer Radio, William Orr, Radio Publications (USA) (ISBN 0 933616 10 4)

See our Book Service pages for more information.

How Difficult? How Much? Beginner


£5 (+ cost of HB9CV)


**Shopping List** 

A budget priced HB9CV antenna (check at the next rally you attend)

8mm aluminium tubing 273mm + 282mm + 290mm + 298mm 15mm square tube 900mm length (Your local TV antenna erector may be the cheapest source)

M3 screws at least 27mm long, nuts for the screws, end-caps or self-amalgamating tape, mast clamp.





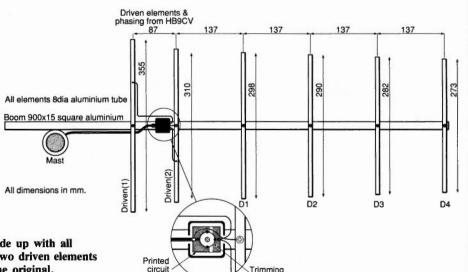


Fig. 2: This is how the antenna is made up with all dimensions of the new elements. The two driven elements from the HB9CV antenna are as in the original.

# Mathematics for the Radio Amateurs' Examination

Theory

Many people get 'worked up' about the techniques, but there's no need to! Subtraction of fractions follows similar rules to addition, the only difference is that numerators are subtracted from each other. For example:

$$\frac{1}{2} - \frac{1}{6} = \frac{3}{6} - \frac{1}{6} = \frac{3-1}{6} = \frac{2}{6} = \frac{1}{3}$$

You see it wasn't so difficult was it? There are a few self-test questions, at the end of this article, to try when you have read all of this part of the series.

## **Multiply And Simplify**

The next hurdle is multiplying fractions. It is actually easier than addition or subtraction! All we do, is to multiply the two numerators together, then multiply the two denominators together.

Suppose we want to multiply 2/3 by 3/4:

$$\frac{2}{3}x\frac{3}{4} = \frac{2 \times 3}{3 \times 4} = \frac{6}{12} = \frac{1}{2}$$

Again:

$$\frac{2}{3}x\frac{5}{8}x\frac{11}{12} = \frac{2 \times 5 \times 11}{3 \times 8 \times 12} = \frac{110}{288} = \frac{55}{144}$$

In each case above, I have simplified the answers, by dividing **BOTH** top and bottom by the same number (in each case by 2).

#### **Diminish Division**

Dividing one fraction by another is nearly as simple, just **invert** (turn upside down) the second fraction (the divisor) and multiply them together using the rules given above:


$$\frac{1}{2} \div \frac{3}{4} = \frac{1}{2}x\frac{4}{3} = \frac{1}{2}x\frac{4}{3} = \frac{4}{6} = \frac{2}{3}$$

#### **Decimate Decimals**

Perhaps a word about decimals might be of help to those who missed them at school or who have since forgotten!

Decimals are just special fractions, the denominators are the same, or very nearly the same in all cases. In the first examples on this page there are various denominators, such as: 2, 3, 4, 6, 12, etc. All of these need to be brought to common denominator before the maths can be worked out. But first, let's recap on how we use numbers, such as the number 376 (three hundred and seventy-six). If you can remember the method used when you first started arithmetic at school? It really means:

That is 3x100 or 'three hundreds' added to 7x10 or 'seven tens', added to 6x1 or 'six units' as I (and older readers maybe) would have written it out.

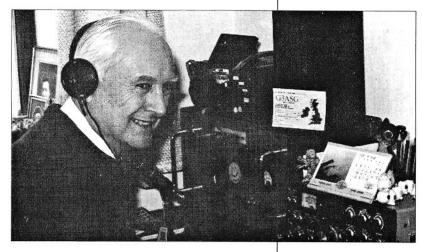

The above example uses whole numbers only, but fractions are easily represented as decimals.

These fractions are shown in the decimal system by being written AFTER a decimal point. The decimal point is used simply to separate the whole number from any fractionional part. So 376 could also be written as 376.0 in decimal notation. The '0' indicates that there is no fractional part.

As another example, the number 53.6 means a whole number '53' and some fraction which is represented by the '.6'. The number 53.6 is read as 'fifty-three point six'.

#### **Base First**

As the 'base' of our counting is 10, there are only 10 possible numbers, and these are 0-9. So, fractions in decimals have denominators with base 10. The fraction 1/10 can be represented in decimal notation by 0.1, the fraction 2/10 is written 0.2, 3/10 is 0.3, etc.

**Remember** that the decimal point itself divides a decimal number into two parts. For example,

34.3 is divided into two parts:

(i) The first part, **BEFORE** the decimal point, '34' represents a whole number, the decimal point means that fractions follow. So after the point the number '3' represents a **FRACTION**, (less than 1) or 3/10.

So the decimal number 34.3 is the same as 'thirty-four and three tenths'. Similarly, the decimal number 129.7 is the same as 'one hundred and twenty-nine and seven tenths'.

Now we'll look at some rather more complicated decimal numbers.

What does the decimal number 13.675 mean? Well, don't forget that 0.6 is the same as 'sixtenths'. Of course, we have 'thirteen and six tenths' for 13.6 in this example, but what about the other two figures in the number, the '7' and the '5', where do they come in?

They are used to give more accuracy, as something divided into 'tenths' gives only ten portions. To achieve more accuracy then we can divide each 'tenth' into ten again, or into 'hundredths'. 0.1/10 is represented as 0.01. This is the same as 1/100. Similarly, we can divide each 0.01 by a further 10 to make 'thousandths', 1/1000 is 0.001, 2/1000 is 0.002, etc.

After Ray Fautley G3ASG's first article on addition of fractions, he continues his easy style with other tricks with fractions. Go on - have a go,- it's not really difficult!

Just as '.6' represents 'six tenths', 0.07 is the same as 'seven hundredths', and 0.005 is 'five thousandths'.

Still not quite clear about it? Not to worry, we'll just add the various bits of the decimal number together.

13.675 is equivalent to:

('thirteen') 13 0.6 ('six tenths')

0.07 ('seven hundredths')

0.005 ('five thousandths')

So we can write 'thirteen and six tenths and seven hundredths and five thousandths' just by putting down '13.675'. It's a much simpler way to express awkward numbers than by using fractions all the time.

## Thinking Caps On

Now it's time for you to exercise your new knowledge and skill!

(i) What is the decimal equivalent of 2<sup>1</sup>/<sub>2</sub> ('two and a half')?

Separate the whole number from the fraction. In this case the whole number is '2'.

The fraction is 1/2 (or 5/10 'five tenths') which is

Joining the bits together we get:

$$\begin{array}{ccc}
 & 2.0 \\
 + & 0.5 \\
 = & 2.5
\end{array}$$

So the decimal equivalent is 2.5.

(ii) What is the decimal equivalent of  $4^{3}/_{4}$  (four and three-quarters)

Separate the whole number from the fraction 4. The fraction is 3/4, or 'three divided by four'.

Dividing 4 into 3 is obviously less than 1, so there is not a whole number in the answer.

The numerator '3' ON ITS OWN is a whole number, so it can be called '30 tenths' or '300 hundredths' or '3000 thousandths', which are all the same as '3'. Supposing we try dividing our 3 (written as 30 tenths) by 4. This time there IS a whole number in the answer, BUT there's also a 'remainder': 30/4 = 7 with a remainder of 2. (Remember that the answer is in 'tenths').

Try again using our 3 as '300 hundredths':

300 divided by 4 = 75 ('hundredths'). Success. The answer is a whole number with no remainder!

Now '75 hundredths' is 75 x 0.01, so the decimal number required is 4.75.

(a) 
$$\frac{3}{5} + \frac{5}{7}$$

(b) 
$$\frac{1}{2} + \frac{2}{3} + \frac{3}{4}$$

(c) 
$$\frac{5}{6} + \frac{1}{7} + \frac{18}{21}$$

(d) 
$$\frac{7}{8} - \frac{3}{16}$$

$$e)$$
  $\frac{5}{6} - \frac{1}{7} - \frac{18}{21}$ 

(f) 
$$1\frac{3}{4} - \frac{3}{5} - \frac{3}{10}$$

$$(g) \qquad \frac{2}{3} \, x \, \frac{3}{4}$$

(h) 
$$\frac{1}{2}x\frac{3}{4}x\frac{1}{2}$$

(i) 
$$1\frac{1}{2}x\frac{2}{3}x\frac{1}{2}$$

Represent the following fractions as decimals. Take care with the last two examples.

(j) · 1/2 15/20 (m)

(k) 1/8 (n)

15/8

(o) 1/3

5/8

#### **Rules OK**

Here are some rules for use in converting a fraction into a decimal.

- (i) Separate any whole number from the fraction and write it BEFORE the decimal point.
- (ii) Add a '0' to the numerator of the fraction, in other words - multiply it by 10.
- (iii) Divide the new numerator by the denominator. If the answer is a whole number WITH NO REMAINDER the problem is finished. Just write the whole number AFTER the decimal point.
- (iv) If the answer is NOT a whole number with no remainder, add a second '0' to the numerator. Multiply it by 10 again (the original numerator has now been multiplied by 100).
- (v) Divide the new numerator by the denominator. If the answer is a whole number WITH NO REMAINDER the problem is finished. Just write the whole number AFTER the decimal point.
- (vi) If the answer is NOT a whole number with no remainder, add a third '0' to the numerator, multiplying it by 10 again (the original numerator has now been multiplied by 1000).
- (vii) Divide the new numerator by the denominator. If the answer is a whole number WITH NO REMAINDER the problem is finished. Just write the whole number AFTER the decimal point.
- (viii) If the answer is NOT a whole number with no remainder, keep on adding '0s' to the numerator and dividing by the numerator, and dividing by the denominator as in steps (vi) and (viii) until the answer IS a whole number with no remainder. When this is achieved, simply write the whole number AFTER the decimal point.
- (ix) If the whole number has only one digit, for example '6', the decimal part of the number will be
- (x) If the whole number has two digits, say '31', the decimal part of the number will be '0.31'.

Now it's time for a worked example using the above rules.

Convert the fraction 163/8 into its decimal equivalent.

- (i) The whole number is 16, so we write it **BEFORE** the decimal point. 16.
  - (ii) Add '0' to the numerator.
- (iii) Divide 30 by the denominator 8, 30/8 = 3with remainder 6.
  - (iv) Add another '0' to the numerator (v) Divide 300 by the denominator 8,300/8 = 37
- remainder 4.
  - (vi) Add another '0' to the numerator 3000
- (vii) Divide 3000 by the denominator 8, 3000/8 = 375 NO REMAINDER!

So, writing the '375' AFTER the decimal point gives the decimal equivalent as 16.375.

That wasn't as difficult as you thought, was it? I've provided a few questions based on this, and last month's part. Work them out, they're not so bad! I'll give you the answers in the next part along with some help in using your calculators to the best advantage.

## To be continued

This month 'Quaynotes' answers some of the many letters you've sent him - and looks at an interesting new antenna product that's about to come on the CB market.

ell, you've certainly let me know that you welcome the continuing of the 'CB' page in PW! My mail-bag is certainly starting to fill up, and even if you don't get your letter printed in full here - I'll use whatever I can to share it with the other 'CB High and Low' readers.

As I hope to do every month from now on, I'll start right 'up at the top' with a letter from dedicated 934MHz 'High' man, Ken Callow in Scotland. Ken's the 'Hon Sec' of the FDX Group based up there in Shotts, midway between Edinburgh and Glasgow.

I've driven through Shotts quite a few times in the past Ken - which one of the TWO huge masts is yours? Only kidding, I know that one is a BBC mast and that the other is for ITV, although nowadays all TV comes from the ITV 'Black Hill' transmitter, just up the road from your village.

Ken sent an interesting QSL card showing that their group is 'twinned' with a group in Schweinfurt, Germany. The letter (passed on to me from Rick Maybury) goes on to explain the activities of the very busy FDX Group which was formed in 1983. I was interested to see that the FDX initials stand for 'Fortissat DX'. Even after a visit to a library and a look in a German dictionary and a Latin quotations guide didn't explain the meaning of Fortissat.. I've no doubt that Ken and other members will let us now what it means!

The group, as Ken wrote in his letter, does not regard themselves as being anything 'special' - but they do aim to promote international friendship and understanding. In particular, Ken stressed their insistence on a high standard of operating. Any member using obscene language immediately



The new Hi-Gain DX Exterminator CB Loop Antenna from CAP.Co. Ltd.

forfeits his membership and Ken reckons that ALL clubs should enforce this rule.

The FDX group has over 150 members throughout Europe, and they also have 'exchange' visits from friends abroad. How about some photographs for 'CB High & Low' Ken? I feel sure that we'd all be interested to see as many 'personalities' (and that means YOU!), clubs, rigs and 'special events, QSL cards and other items we can share in our 'small corner' of PW!

polarisation of his 'beam' antennas and fitting a filter to use in conjunction with his antennas. This was done despite the fact that the 'Poser Phone' transmitters are close by! How about a photograph of how you did it Mr Gale?

I've had so many letters and comments about interference from 'other users' near to the 934MHz allocation that next month I'm going to show you the simple technique of using coaxial 'stub' filters. It's very effective, you only need a short



By 'Quaynotes'

#### **Dedicated User**

Another letter came winging its way to my corner of Dorset from London, as soon as Mr J. F. Gale of Kensal Rise in the northern part of the capital read the first 'CB High & Low' column. I've got to be formal, as he forgot to give his first name!

Mr Gale says that he's a 'truly dedicated' 934MHz operator and has been a member of the much respected '934MHz Club UK' since he 'discovered' the joys of working on 934MHz in 1984. His next comment is one that appears in all your letters, and that's about the high operating standards on 934MHz. Interestingly, Mr Gale mentions that the unfortunate abuse on the amateur radio 144MHz repeater in south London is referred to as 'overflow' from 27MHz in his neighbourhood!

Finally, Mr Gale mentions the interference he's suffered from the dreaded 'Poser Phones' on 934MHz. However, he's been able to cure 99% of the problem by adjusting the length of suitable coaxial cable, side cutters and patience! This idea saved me many hours of fruitless work when I worked as a radio and TV 'aerial rigger', and it costs nothing but time.

So, before I 'wrap up' the 'High' part of 'CB High & Low' I'd like to thank all of you who wrote to welcome me to the page. I'm also going to follow up your suggestions that I get onto 934MHz myself. See you there!

#### Scene On Twenty-Seven

My comments about the 'rural net' down here in Dorset, prompted an interesting letter from a gentleman in Tenterden, Kent. He's in the early stages of starting up a rural CB service on 27MHz and readily confesses to being a member of the 'Over 60s Brigade'.

The only problem is, that money is limited. Can anyone help? To start the service up, they only need three transceivers, but the group need technical assistance and advice on antennas.

If you can help, please write



Ken Callow's distinctive QSL card.

to me c/o the *PW* office - and I'll pass the letters on. I've got no doubt whatsoever that we'll get him and his friends 'on the air'.

#### A Sneak Preview

It's not often nowadays that we get new antennas onto the CB market. But things are happening and I'm pleased to say that we've got a new product about to come onto the shelves from a respected UK manufacturer.

The new 'Hi-Gain DX
Exterminator' loop antenna
from CAP.Co Electronics Ltd.,
fills a much needed 'gap' in the
market. Not only is the antenna
very small, it can also be very
effective when mounted very
low down or hidden in a roof
space.

The full technical specification looks very interesting and it seems as though anyone suffering from, or causing interference will benefit. I've managed to get a picture of the new antenna and soon I'll have one to try out and 'review' for 'CB High & Low' readers.

The antenna's going to be priced at around £99.50 but CAP.Co. Electronics, whose address is Unit 28, Penley Industrial Estate, Penley, Wrexham, Clwyd, Wales LL13 0LQ, Tel: (0948) 74717, are planning an introductory offer of £79.50.

We've got some more interesting products to look at very soon, but that's our lot this time. Don't forget to write to me c/o the PW office in Poole and let's have plenty of photographs and details of what you're doing on 'CB High & Low!' Cheerio for now.

# *PACKET PANORAMA*

This month Roger Cooke G3LDI, starts of a section for the newcomers to packet. Those mysterious words and phrases will no longer be a mystery.

In order to help the newcomer, and the not-so-newcomer. I'll devote a space each month to a form of helpline. This will be separate from the main body of the column in a panel of its own. Over the coming issues I'll be providing a glossary of terminology which causes you problems. I also intend to publish a list of hints and tips. Should you have any helpful hints or tips, general or specifically related to one piece of gear, please let me have them so I can include them in 'Starting Frame', with a credit to the sender.

This month I'm continuing with the interesting paper from Dr. Tom Clark W3IWI, with particular reference to h.f. packet reorganisation. It would be really useful if we could bring together the worlds' major BBS software writers and lock them in a room together for a month or so. That way, we should end up with some common ground for real improvements! However, with thought-provoking papers such as the one from W3IWI, it looks as though AX.25 has a limited life-span and indeed, may be already due for an overhaul!

## Link Level Issues

This paper and its companion discuss some of the issues involved in improving amateur h.f. digital links. The intent is to present some strategies to allow a significant improvement with modest hardware

and software investments. There is frustration at the current situation, the number of packet stations around the world has increased enormously over the past five years. The ability of the long-haul h.f. networks to support user's message traffic has been, at best, a 'level' resource with two fundamental problems:

- 1. At the link level all digital modes are using elementary technology, which grew out of standards that were convenient but far from ideal.
- 2. The AX.25 protocol, currently used, is incredibly inefficient and needs updating or replacing.

Developments in these two areas should proceed in parallel.

#### **Wireless Wires**

It has often been stated that radio links, especially those at h.f., are the worst possible 'wires' for carrying digital signals. Modem designers using real 'wires' are able to make three simplifying assumptions: The signal-to-noise ratio is high. Signals are stable for long periods of time and any noise present in the system has a Gaussian probability distribution.

Non-linearities present in the 'wires', have effects that are constant for long periods of time, and may be handled by simple adaptive equalisation. Against these conditions, even our best v.h.f./ u.h.f. paths are inferior. At h.f. none of the above conditions are

applicable, and yet we attempt to use the Bell-103 modern standards (200Hz shift, 300baud, one bit/baud) for h.f. packet and similar standards for RTTY and AMTOR.

#### **Old And New**

The Bell-103 modem standard was easy to implement using i.c.s such as the Exar XR2211.

Inexpensive modems became cheap and easy to manufacture. But ease of manufacture does not mean optimum performance!

Soon we will have Digital Signal Processing (DSP) hardware available. Much experimentation by amateurs has led to several products which will be available soon. The AEA and DRSI hardware will be the commercial side of AMRAD, TAPR and AMSAT as amateur developments.

These new products have an 'open architecture' so further experiments may be made. When a new idea is available, the code will be distributed by various means. This may mean a 'System of the Week Club' being formed!

In order to design an 'optimum' modem system, (if it even exists) we must consider the overall data transfer system, as outlined in Fig. 1.

This drawing of Fig. 1 is intentionally simplistic. Data managing may take place in the host computer or in a separate box. Some data operations, such as forward error correction (FEC), or convolutional encoding, may best be

handled by the DSP 'engine'. For the sake of simplicity, think of the modern functions as separate from coding functions.

In optimising the modem side, we must consider the entire signal path. The radios, antennas and ionosphere are considered as a filter. Radios and antennas are simplest to deal with, since their performance is nearly constant with time.

James Miller G3RUH, has demonstrated that the combined inadequacies of f.m. transmitters and receivers can be improved by pre-distorting the transmitted signal waveform. This could also be used at h.f. An optimum demodulator needs to employ the conjugate filter to achieve best performance.

#### **Noisy High Frequencies**


The further problem arises because of additive noise. The h.f. band is plagued, with impulsive noise, from thunderstorms, vehicle ignitions, relays, etc. The major defense against noise, is to ensure that data protocols are tolerant of dropouts. Receivers and demodulators having good dynamic range and which recover rapidly from 'glitches' can also help. It has also been argued for frequency diversity to help mitigate against such problems.

#### **Bit And Baud**

The confusion between bit-rate (b.p.s.) and baud must be clearly understood. A bit is a single piece of data, a baud represents an interval of time to accomplish the signaling of that bit.

We now see more than 20 000b.p.s. on a normal telephone line. It is often said that, 'if such signals can go through a phone line, why don't we use them on the radio?' However these high speed V32 modems use a complex trellis, code scheme. Here, quadrature and in-phase channels are each amplitude modulated after the bits are encoded.

The resulting complex waveform must be handled very carefully if information is not to be lost. Typical V32 modems use custom DSP chips with 18-bit

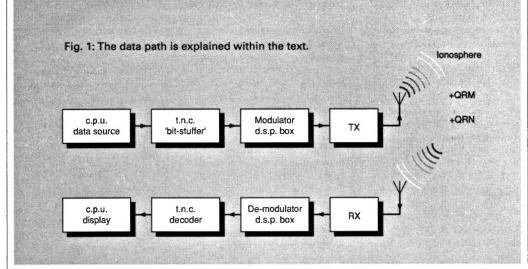

# PACKET PANORAMA

converters. A 'training sequence' at the start of each transmission is used as a test.

These aren't the characteristics to be found on our radio links!

Let's consider the tone-dialling telephone system. Each signalling element consists of one low tone, and one high tone. The two signals encode 16 possible states, equivalent to 4 bits. This could be expanded to 255 possible states - almost 8 bits worth of data (the zero state with no tones present is undefined).

#### No Mathematics

The complex mathematics concerning limitations of m.u.f., Planck's constant and Shannon's limit, have been cut out as the majority of readers will not be interested in this aspect.

All of the modems, that seem to violate the uncertainty principle and Shannon's limit, do so by requiring stable signal and high s/n ratios. One of the goals of h.f. modem development should be to figure out just which schemes can force bits through poor channels. Of more concern though, are the ionospheric effects that exhibit considerable time and frequency variability on the signals.

#### **lonospheric Filter**

We tend to think of the ionosphere as a mirror that 'bounces' signals back. However, this is an overly simplistic view. In reality, the ionosphere continually bends a signal travelling through it.

When we operate at 3.5MHz, our signal undergoes many degrees of phase shift as it is slowed down and 'turned'. All the little density variations in the ionosphere lead to the severe multipath distortion heard on this band. However, when we operate on 21 or 28MHz the signal spends little time in the ionosphere so it has less distortion.

Users of RTTY and AMTOR on 3.5 and 7MHz know that 45 or 50baud signals usually works, but plain text (ASCII) at 110baud is marginal. Very few have been successful with 300baud Bell-103 packet transmission on 3.5MHz. Many military and commercial h.f.

tests similarly indicate that 50-75baud, is about the limit for h.f. paths shorter than 1000km.

In the 1000-2000km range covered by the 7, 10 and 14MHz bands, clearly the system can work witness the success of SKIPNET at moving large volumes of packet mail (albeit with low efficiency). But the AMTOR and RTTY stations running lower baud rates are able to move data when packet stations have difficulty.

The strong evidence is that rates in the 100-200baud range would be much more suitable when conditions are poor. Since there are days when the ionosphere is good, and others when it's horrid, an optimised strategy would be to have adaptive rates which change with conditions. In the ionosphere, how long is my baud?

#### **Data Coding Rates**

Up to now I've talked in terms of the baud. This term means the number of signalling elements that occur in one second. I can now briefly mention some schemes which can be easily implemented in DSP hardware. Which of the systems proves most successful remains to be seen! In all of these schemes, each signalling element will convey more than one bit.

The first simple example is known as Quadrature Phase Shift Keying (q.s.p.k.). A carrier signal is phase modulated to one of four possible phases. Since there are four discrete states of the signal, then 2 bits of data can be encoded in each time slice. If the propagation medium is stable enough to permit 8 or 16 phase states (8p.s.k. and 16p.s.k.), then 3 or 4 bits could be sent. In addition to modulating the phase of the signals, amplitude coding will be tested.

Commercial systems using multi-tone on/off keying (o.o.k.) have proved successful. So we might design a scheme where 32 tones spaced 25Hz apart are used, with one tone representing each bit. The 25Hz channel spacing and the uncertainty principle discussed earlier mean that we can key the tones at 25baud (40ms signalling elements) and occupy about 850Hz of spectrum.

## **Starting Frame**

**Address:** The identification of a packet transmitting station or destination of the packet message.

Address field: The section in a packet frame containing the callsigns of the source and destination of the packet. It may also optionally contain the callsigns of one to eight digipeaters (rebroadcast stations)

ANSI: American National Standards Institute. When applied to a computer or terminal screen, it means a series of codes which control the colours and position of the characters on the screen

ASCII: American National Standard Code for Information Interchange. A seven bit digital code to numerically define characters and control codes. The values 0-47 are control codes, 48-58 are the numbers. Capital 'A' is 65, 'B' =66, etc. Lower case 'a' starts at 97, 'b' is 98... The last number is 127 which means delete last character typed.

Application Layer: Level 7 of OSI-RM that provides and interface between the other OSI-RM layers and the user application. (See OSI-RM)

Asynchronous: A digital data transmission timing technique that adds bits of information to indicate the beginning and end of each transmitted character. A start-bit signifies that a character is about to be sent. One, one and a half or two stopbits signify that the character should be complete.

AFSK: Audio Frequency Shift Keying. A method of transmitting digital information by switching between two fixed audio tones transmitted as if from the microphone input.

Autobaud: The capability of a communications device to automatically adapt to whatever baud-rate is being used by the terminal connected to it, (baud-rate is a measure of 'bit' transmission speed)

Auto Line Feed: A DTE (data terminal equipment) or DCE (data communications equipment) function that causes a line feed control character to be sent whenever a carriage return control character is sent (see ASCII).

AX.25: A definition of the significance of each character in the packet stream. The link-layer packet radion protocol based on the CCIT X.25 packet-switching protocol.

Although this is a 25baud system, it conveys 800b.p.s. of data. Instead of using all 32 bits for data, we might add in an error-correcting code. Depending on the degree of protection desired this might reduce the delivered data rate to 600-700b.n.s. This multi-tone o.o.k. approach, if carried to this limit, places severe needs on the dynamic range of transmitters. The peak-toaverage power requirements will be quite large. Since amateurs are notorious for 'upping the wick', onthe-air tests will be needed to see how gracefully multi-tone o.o.k. loses performance and how 'unfriendly' it is to users on nearby frequencies.

## **Early Days**

In the early days of packet, error detection and correction was rejected because the c.p.u. chips (8085, 6809 or Z-80) of the time lacked the 'horsepower'. The protocols used placed less stringent requirements on these processors, so FEC was included. Now the price of 'smart' silicon has come down, so the early decision should be reversed, especially for h.f. applications.

More next month. I also plan give some information about packet activity in Canada.

Comments, news, views and insults to:
Roger, G3LDI @GB7LDI,
QTHR, or Tel: (0508) 70278 - for 24hr answering clone.
73 and happy packeting.

# IEVADA

.... IF IT'S RADIO WE'LL KEEP YOU POSTED

Yes, after 21 years in the business, we carry just about everything for the Radio Enthusiast. Send in £2 now for our new 1991 colour catalogue and see for yourself.

## Scanning Receivers

AR 3000 BASE/MOBILE

Icom R1 The world's smallest scanner, 150kHz - 1300MHz. 100 mems. AM/FM & WFM modes. Full range of accessories in stock.....£399.00

LOW NOISE WIDEBAND PRE-AMPS (25 - 2100MHZ)

Jim M-100 for use with TX/RX ......£79.95 Jim M-50 fixed 18dB gain no filters ......£49.95

## Kenwood

TS850SD H.F. Transceiver - w/without ATU. General coverage RX plus many more features - this new model has to be 

TS950DS Kenwood flagship - dual receiver with digital processing - internal ATU - full details available......£3199.00 TM731E dual band mobile ......£655.00 TR751E 2m -m/mode ......£599.00 TM241E H/PWR 2m FM ......£289.00

\*\* This is only a small selection - many more in stock \*\*

## Shortwave Receivers

LOWE HF225 30kHz - 30MHz - FM filters

ICOM R7000 25MHz - 2GHz - all mode operation with 99 user programmable memories.....£ PHONE

SONY RADIOSWe are the main shortwave stockist.

ICF-2001D Portable s/w receiver with civilian airband

ideal travel companion.....£ PHONE

#### Icom

As mainstream dealers for all of Icoms products, we carry a good cross selection of their popular models. Don't forget! we do offer good p/x terms so why not save money and make way for that new H.F. rig this year.

IC-765 HF all band gen. RX ......£2499.00 IC-255 E/H - 2m base - m/mode ......£1199.00 

\*IC-2SE \*IC-4SET \*Icom WB1 \*IC-735 \*IC-24ET

## CB Radio

We are still the UK's leading CB dealer and manufacturer and as such carry a wide range of radios and accessories. JOHN, our expert, has an indepth knowledge of all aspects of the hobby – from antennas to patch leads and Cybernets to Midlands – he's the man to call. Here's just a few of our CB Radios-

Team TSM404 ...... £79.95 Midland Power Max cept£89.95

If it's not listed call John!

## Trading Post

With the ever increasing prices of new equipment more and more of us are turning to second-hand and used equipment. Here's a sample of our current models:

FRDX400 RX £245 TS430S £625 FT7B c/w 160m £345 Atlas 210 & VFO rare £385 FT790 70cms m/m ...... £325 FRG9600 boxed ......£375 FT480R 2m m/m ...... £295 BNOS 50W 70cms amp ....£149 TS130 Line up ......£525 FRG7700 choice of 2 ..... £425

Please check availability prior to ordering – don't forget we also take part exchange - phone for details.

## Kenpro Radio

We are now the UK sole distributor of Kenpro. The first in a long established line is the: KT22EE 2MTR HANDHELD Thumbwheel operated this is an

ideal 1st radio - more new models to follow......£139.00

NEW BS25 MKII DOCKING BOOSTER Boost the output of your 2mtr handheld to 25W. Suitable for:- ICOM, Kenpro, CTE, and BS23 for some Yaesu handhelds......£69.95

WANTED FOR CASH - all makes of Amateur Radio, CB Radio, Shortwave and Scanning Receivers to add to our already huge stocks of s/hand fully guaranteed equipment.

Just call Paul Martin on 0705-662145 for an instant quote.

## New Scanning Receivers

NEVADA MS1000 The worlds 1st mobile 1000 channel scanner. Modes AM-FM-WFM. Specs similar to HP200 – additional:-AF Scan facility & remote cassette record option.......£279.00\_

FAIRMATE HP200E The Ultimate Handheld - 500 KHz -600MHz & 805MHz - 1300MHz AM/FM & Wide FM. Complete with accessories.....£269.00

We are the UK distributors for the Yupiteru range of sensitive scanning receivers. Here are some of the latest models we

MVT-5000 H/held (25-550 MHz, 800-1300 MHz), 100

memories, c/w all accessories..... MVT-6000 Base/mobile version of the MVT-5000 h/held

supplied with all accessories and AC adaptor......£299.00

NEED AN ITEM IN A HURRY - WE SHIP ANYWHERE FAST! CALL US NOW! ON 0705 662145 OR FAX US ON 0705 690626 Nevada Communications, 189 London Road, Portsmouth PO2 9AE

理無色

## Getting Started-The Practical Way

Georgian State of the Control of the

George in his workshop with one of his 'junior operators'. Like father, like son!

In the second part of his regular series, the Rev. George Dobbs G3RJV, looks at resistors, switches and tackles a practical project.

'Getting Started' is essentially a practical series. You'll build things and learn by building. Components and techniques will be introduced along the way, as will simple theory.

Sometimes the practical projects will outstrip the theory. Don't worry, it will catch up in time, but in order to build things we may have to ride 'roughshod' over some of the niceties of theory. To get at some practical projects you may simply have to accept what I say with the simplest of explanations. All you have to do is to trust me and warm up your soldering iron!

#### **Passive And Active**

Electronic components can be divided into two groups and these are **Passive components** and **Active components**. This is a simple description of their function with a circuit. The active components 'do things' such as amplification, multiplication and division, etc.

The 'active' group includes transistors, diodes and integrated circuits (often knowns as 'chips'). The passive components surround the active components, and, generally speaking, enable them to do their job.

#### **Common Resistor**

The commonest passive component is the resistor. It's a deceptively simple component which, as the name implies, resists the flow of electrons in the circuit.

Most of you will know that copper wire is a good conductor. Resistors however, are designed to be bad conductors. They used to be made from a carbon composition, with a ceramic content. Nowadays though, they are made from a thin carbon or metal film deposited on a ceramic former.

Most of the resistors you'll come across will have a wire lead at either end of the component. Their value of **resistance** is quoted in **ohms** and is given the Greek symbol  $\Omega$  (Omega). We'll explore the simple mathematics involved in relationship between resistance, voltage and current later in this series.


#### **Colour Coded**


Look into most pieces of electronic equipment and the circuit boards will abound with resistors.

They're easy to spot, and you'll soon see the little cylinders with bright coloured stripes and a wire at each end.

The stripes are a colour code to indicate the value of the resistors in ohms. The way this coding system works is shown in **Table 1**. Each number from 0 to 9, is identified by a colour. The coloured bands are usually read by beginning with the band nearest one end of the resistor body.

It's not a difficult technique and the order of reading is: Number - Number - Multiplier. The multiplier band tells the reader how many noughts to add to the value of the resistance.

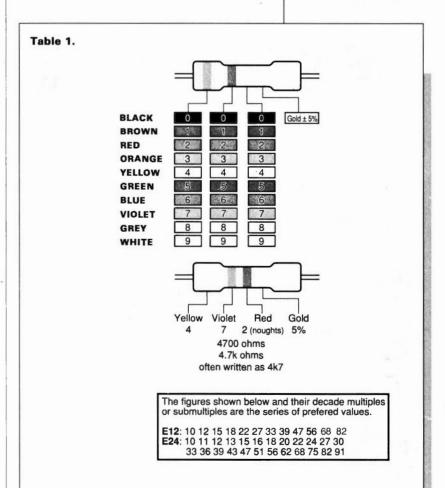

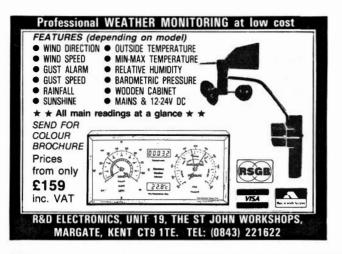

#### G6XBH . **GIRAS G8UUS**

Visit your Local Emporium Large selection of New/Used Equipment on Show AGENTS FOR:

YAESU ◆ AZDEN ◆ ICOM ◆ KENWOOD ◆ ALINCO ACCESSORIES

Welz Range, Adonis, Mics, Mutek Pre-Amps Barenco Mast Supports, DRAE Products, BNOS Linears & PSU's ★ ERA Microreader & BPS4 Filter, SEM Products ★

★ Full range of Scanning Receivers ★

AERIALS, Tonna, Full Range of Mobile Ants, Jaybeam BRING YOUR S/H EQUIPMENT IN FOR SALE JUST GIVE US A RING

**Radio Amateur Supplies** 

3 Farndon Green, Wollaton Park, Nottingham NG8 1DU Off Ring Rd., between A52 (Derby Road) & A609 (Ilkeston Road) Monday: CLOSED Tuesday-Saturday: 10.00 a.m. to 5.00 p.m.

Tel: 0602 280267

## PACKET RADIO FROM THE SPECIALISTS!

Siskin Electronics have a policy of supplying the best range of packet radio equipment available for the radio enthusiast. We have examined the products of many manufacturers and are pleased to be able to offer what must be the widest range of equipment available from just one UK supplier. All prices include VAT and were valid when going to press.

AEA	
PK-232/PK-88 Real Time Clock£	29.95
AMT3 AMTOR/RTTY£17	9.95
PK-232+MAILBOX£29	99.95

## PK-88 VHF/HF TNC + new MBX...£129.00

## PACCOMM

Real Time Clock fits BSX etc. too!	£	29.95
STATE MACHINE DCD (3105)	£.	19.95
HANDIPACKET(LeTNC)	£	199.00
PSR-1MICROSAT MODEM	£	189.00
PC-320 dual port PC card	£	89.00
TINY-2 with PMS version 3.0	£I	29.00
TNC-320 dual port.HF/VHF		
9600 baud modem		

#### KANTRONICS

"Smart Watch" Real Time Clock.	£	29.95
DATA ENGINE (56,000 baud)	£3	327.95
KPC2 HF/VHF with Wefax	£	65.00
KPC4 VHF/VHF dual port	£2	242.00
KAM all mode with Wefax	£2	285.00
Data Engine 9600 modem board.	£	95.00

#### LATEST UPDATE RELEASE INFO Kantronics Version 3.04

BOLT ON GOODIES RKTU Weather Node......ICS FAX (PC incl. VGA!!!)..... .£89.95 ATARI PC3 (30M H.Disk), EGA...£799.95 32K (62256) static ram.....£ 12.50 Custom made audio leads from.....£ 11.95 Custom made RS232 leads from....£ 9.95

In house custom RS232-TNC lead service! HF-225 Gen. Coverage Receiver... £425.00 Navico AMR 1000S Transceiver... £249.00

We supply driver software for most computers FREE of charge with all TNC numbases.

#### NEW PRODUCTS.

Kantronics Weather node, connects to any TNC RS-232, can polled by packet radio for remote weather conditions (wind, temperature etc.) Phone for details or see our demo at the next rally!

If it's in stock (and it usually is !) we will despatch it same day.

NOTE: Prices do not include carriage

RSON

WISA AMEX

#### Siskin Electronics Ltd

2 South Street,

Hythe, Southampton, SO4 6FB

FAX: 0703-847754

Tel: 0703-207587,207155



$\sqrt{\Lambda}$	$\tau$	750		High Qu		Prices		when going		ŝ	1000
VA	1 1	/ ->		"Very H	igh Quality	but me	y fluctua	te. 15% VAT	incl.		
		CDC00	0.00	LEF39				I DV 0.0	0.70	LUCCOF	4.00
A1065		EBF89				ELL80SE		PL82		UCC85	1.00
A2293	7.00	EC52	0.65	EF80	0.65	EM80	1.75	PL83	0.70	UCH42	4.60
A2900		EC91	5.20	EF83	3.90	EM87	2.85	PL84	0.90	UCH81	0.75
AR8	1.40	EC92	5.55	EFB5	0.90	EY51	0.90	PL504	1.25	UCL82	1.60
ARP3	1.45	ECC81	1.25	EF86	1.45	EYB1	1.10	PL508		UF41	1.85
ARP35	1.50	ECC82	0.96	EF89	2.50	EY86/87	0.75	PL509	5.35	UF80	1.60
ATP4	0.90	ECC83	1.60	EF91	1.60	EY88	0.65	PL519	5.85	UF85	1.45
B12H	6.90	ECC84	0.80	EF92	2.15	EZ80	0.80	PL802	6.60	UL84	1.50
CY31	2.40	ECC85	0.75	EF95	1.40	EZB1		PY80	0.90	UM80*	2.30
DAF70		ECC88		EF96			11.05			UM84	1.30
DACOR	1 25	ECC189	1 20	EE193	0.75	CNA	6.30	DV81/800	0.85	LIVR2	1 10

	ARP3	1.45	ECC81	1.25	EF86	1.45	EYB1	1.10	PL508		UF41	1.85
	ARP35	1.50	ECC82	0.96	EF89	2.50	EY86/87		PL509		UF80	1.60
	ATP4	0.90	ECC83	1.60	EF91	1.60	EY88	0.65	PL519	5.85	UF85	1.45
	B12H	6.90	ECC84	0.80	EF92	2.15	EZ80	0.80	PL802	6.60	UL84	1.50
	CY31		ECC85	0.75	EF95	1.40	EZB1	0.80	PY80	0.90	UM80*	2.30
	DAF70		ECC88	1.60	EF96	0.65	GM4	11.05	PY81		UM84	1.30
	DAF96		ECC189		EF183	0.75		6.30	PY81/800		UY82	1.10
	DET22		ECC804	0.65	EF184	0.75	GY501	1.50	PYB2		UYB5	0.85
- 1	DF92		ECF80		EF812	0.75	GZ32	2.80	PY88		VR105/30	2.75
	DF96		ECF82		EFL200	1.85	GZ33		PY500A		VR150/30	2.75
	DH76		ECF802		EH90	0.85	GZ34	2.80	QQV03/10	5.95		4.95
	DL92		ECF804	4.50	EL32	0.85	GZ37	3.95	QQV03/10*		Z749	0.75
	DY86/97		ECH35		EL34		MX120/01		QQV03/20A			17.90
	DY802		ECH42		EL34*		N78	9.90	QQV06/40A		Z800U	3.45
	E92CC		ECH81	1.25	ELB2	0.70						3.75
	E180CC		ECH84	0.90	ELB4		PCL82	0.95	QV03/12		Z803U	21.15
	E1148		ECL80	0.75	ELB6		PCL84	0.85	QY4/400	101.60		9.50
	EA76		ECL82	0.95	EL90	1.75	PCLB6	0.80	SP61		1A3	1.90
	EB34		ECL85	0.95	EL91	6.50	PCL805/85	0.95	TT21	47.50	1L4	0.95
	EB91		ECL86	1.20	EL95	1.80	PD500/510	5.60	TT22	45.00	1R5	1.20
	EBC33		ECLL800	17.25	EL504	2.30	PFL200		UABC80	0.75	154	1.20
	EBC90	1.20	EF9	3.80	EL519	7.70	PFL200*		UBF80	0.95	1S5	0.85
	EBC91		EF22		EL821	7.50	PL36		UBF89	0.95	174	0.75
	EBF80	0.75	EF37A	2.45	EL822	11.50	PLB1	1.30	UCC84	0.85		

VALVES AND TRANSISTORS Telephone enquiries for valves, transistors, etc. as below.

POSTAGE (1-03 (1.00: (3-05 1).20: (5-01) (1.40: (10-015 (1.70: (15-02) (2.50: Over (20 (3.65, Prices over 2kg at cost

ANTENNAC TONNA (FOFT)

COLOMOR (ELECTRONICS) LTD 170 Goldhawk Rd, London W12 8HJ Tel: 081-743 0899 Fax 081-749 3934. Open Monday to Friday 9 a.m.-5.30 p.m. ARC-44 AIRBORNE T/Rix compact unit intended for use in Helicopters covers freq range 24 to 51.9 Mc/s in 100Kc steps mode FM nom 0/P 8 watts into 50 ohm comprises T/Rix, Control Chan Sel box, Dynamotor unit, Mike Amp, DC I/P 28v at 5 angs uses min 8 sub min valves with circs etc. (38 also available with 8ft faire glass whip and matching unit at £54. SIG 6ENS. Marconi TF 2016A 10Kc to 120Mc/s AMF/M in 12 bands stab carrier level 8 var o/p 1 Uv to 1v into 50 ohms, as a provision for ext sweep reas sewtooth 0/15v to cover each band, size ext 6 v12 × 12\* for 240v tested with book. £185 also available TF995/IA2 1.5/220 Mc/s AMF/M £115 TF995/IB2 200Kc to 220Mc/s AMF/M £135. TF144/H 10Kc to 70 Mc/s AM 195. SCOPE ADVANCE 052200A. General purpose dual trace bench scope with storage modes, as normal scope bandwidth DC to 25 McIs at 10 Milly CM 18 2 Sec/CM to 0.1 Us/Cm also T.B. delay. TV Line & Frame sync selector, in storage mode trace can be displayed up to 30 min enabling single shots to be monitored Tube 10×6 Cm with 7Kv EHT ext size 10×11×18 checked with books. [195 BRIDGE UNIVERSAL B221(CT530) Military version of Wayne Kern B221 Bridge with leads as average or inst took. It's was overaged to 52.1 (L.13/3) LHL bridge similar but less tructions with book. It's MONITOR UNITA 435 old AM monitor scope for 230 V amp 10 Millily CM 181 flock to 5 Kc Y amp bandwith 10cts to 300 Kc tube 3" dia green trace in bench case size 12 × 10 × 22" these units are suitable Audio or Elec circ functions or beginner required simple scope tested with circ. 65 DIPOLES A/C. Radio Altimeter nom 420 Mc/s with mte plate & S0230 Sk new £4.50 ea 2 for £8 DISH AERIALS plain Ali with 1.76H<sub>3</sub> dipide 18" dia £13.50.

Above prices include Carr/Post & VAT. Goods ex equipm

SAE with enquiry or 2×22p stamps for List 46

## A.H. SUPPLIES

Unit 12, Bankside Works, Darnall Rd, SHEFFIELD S9 5HA. Phone. 444278 (0742)

ARIERRAS	URR	A (F9FI)	THE VHF/UNF ANTENNA SPECIALIST
50MHz		144/435MHz	POWER SPLITTERS
5 element	£50.71(a)	9 & 19 element Oscar £61.67(a)	2 way 144MHz £48.36(b)
			4 way 144MHz £57.53(b)
144MHz		1250MHz	2 way 435MHz £45.69(c)
4 element	£29.39(a)	23 element£61.07(b)	4 way 435MHz £55.76(c)
4 element crossed	£37.26(a)	4 × 23ele - stacking frame - power	2 way 1250MHz£38.35(c)
9 element fixed	£33.12(a)	splitter £175.00(a)	4 way 1250MHz £43.36(c)
9 element portable	. £35.19(a)	spirot	2 way 1296MHz£38.35(c)
9 element crossed	562 10(a)	1296MHz	4 way 1296MHz£43.36(c)
13 element	C49 06(a)	23 element	2 way 2300MHz£38.35(c)
17 element		4 × 23 ele - stacking frame - power	
		solitter £175,00(a)	AMPREW HELIAY
435MHz		55 element C49 27(a)	MINDEN ILLIAN
9 element	£30.43(a)		'N' Connectors
19.element	£30.64(a)	splitter	N Connectors£20.00(c)
19 element crosseri	542 44(a)	Spritter Ezou. vola	TELECOODIC MACTO STACKING

FRAMES - COAXIAL CABLE - ROTA ....E43.47(b) TORS ETC. 21 element ATV ... £47.61(a) 25 element. All prices include VAT. Please add carriage (a) E5.50 (b) £2.20 (c) £1.20 U.K. MAINLAND ONLY ACCESS or VISA cardholders telephone your order for immediate dispatch. Callers welcome, but by telephone appointment only, please. Send 50p for our catalogue which contains the full specifications

SOLE U.K. DISTRIBUTOR

21 element 432MHz

RANDAM ELECTRONICS (P) FREEPOST, ABINGDON, OXON, OX14 1BR. Tel: (0235) 523080 (24hrs)



J. BIRKETT 25 The Strait Lincoln, Tel. 520767 (LN2 1JF) RADIO COMPONENT SUPPLIERS TANTALUM BEAD CAPACITORS. 10v.w., 4.7uf, 15uf. Both @ 15 For £1.00.
WIRE ENDED DIDDES BY 127 1300 PIV 1 Amp @ 10 for £1.00.
WIRE ENDED DIDDES BY 127 1300 PIV 1 Amp @ 10 for £1.00.
WIRE ENDED DIDDES BY 127 1300 PIV 1 Amp @ 10 for £1.00.

WIRE ENDED DIDDES BY 127 1300 PIV 1 Amp @ 10 for £1.00.

STORNO 1 CHANNEL MID-BAND FM BOOT MOUNTING TRANSCEIVER with Loudspeaker and Control Box @ £9.00 (P&P £4).

STORNO 10 CHANNEL FM TRANSCEIVER TO 10 110MHz Boot Mounting. No Accessories @ £8.00 (P&P £3).

REDIFON 2 CHANNEL MID BAND FM TRANSCEIVER with Loudspeaker and Control Box @ £7.95 (P&P £4).

AIR SPACED VARIABLE CAPACITORS. 15 + 15pf @ £2.50, 120 + 10 + 20pf @ £1.50, 100 + 20pf @ £2.50, 200 + 350pf @ £2.50, 250 + 250 + 20 + 20 + 20 + 20pf @ £2.50, C804 Type Z5pf @ £2.50, 50pf @ £2.50.

POWER TRANSISITORS. 2N3055 @ 5 for £2.00. B0Y90 @ 5 for £2.00. Partners J.H.Birkett. @ 12.50.
POWER TRANSISTIORS. 2N3055 @ 5 for £2.00. 80 Y90 @ 5 for £2.00.
SMALL 9 VOLT SOLONOIDS @ 5 for £2.00.
SMALL 9 VOLT SOLONOIDS @ 6 for £2.00.
SMALL 5 TO 12 VOLT MOTIORS @ 4 for £1.95.
REGULATOR 1.C. 12 Volt 3 Amp M/8112CK @ £1.55.
FERRANT SURFACE MOUNT TRANSISTORS. 8CW66G, FMMT38C, FMMD914TA. All at 15 for £1.00.
DISC CERAMICS. 0.1uf 63v.w. 200 for £1.95.
FETS 2N3819 @ 25p. J304 @ 20p. BFW 11 @ 30p. BFW 12 @ 30p. ZN3824 @ 30p. Dual Gate MOS FET 3N201 @ 30p. 3.8K88 @ 60p. TRANSFORMERS. 240 Volt Input. Type 1. 15 Volt 1 Amp @ £1.95 (P&P 60p). Type 2. 12 Volt 5 Amp @ £5.00 (P&P R.F. POWER FETS MRF 136. 2 to 400MHz 15 Watt 28 Volt. With data @ £9.95. Matched Pair @ £18.60. ACCESS and BARCLAY CARDS ACCEPTED. P&P 60p under £5. Over Free. Unless Otherwise Stated. C.M. HOWES AND WOOD & DOUGLAS KITS. Available By Post and For Callers.

There is a fourth band which indicates the 'tolerance' of the resistor, that is, how accurate the value can be. A gold band indicates plus or minus 5% and a silver band plus or minus 10% of the stated value.

#### **Practical Example**

The following example shows how the system works. We'll assume that we have a resistor with Yellow - Violet - Red and Gold markings. The markings indicate 4, 7 and 2 zeros and that it's a 5% tolerance resistor. So the value in ohms of this particular resistor is 4700, or four thousand seven hundred ohms  $(\Omega)$ , or 4.7 thousand ohms.

It's usual to shorten this with the conventional 'kilo' and 'Mega' designations. The 'kilo' equals 1000 (or three zeros) and 'mega' equals 1000000 (or six zeros). So 4.7 thousand is expressed as  $4.7k\Omega$ .

Because decimal dots can be 'lost', this  $4.7k\Omega$  is often written as 4k7, the k replacing the decimal point. Get 'stuck in' to your component box. Try and find some other values such as: **brown - black - red**  $(1k\Omega)$ , **green - blue - yellow**  $(560k\Omega)$  **red - red - green**  $(2.2M\Omega)$  and so on.

#### Circuit Applications

For most circuit applications the value of a resistor in ohms is not very critical. A variation of 20% (plus or minus 10% of the value) would be in order.

With this in mind, there is a standard range of resistor values that begins at 1 and increases in approximate 20% steps. The standard range also goes up in decade values. These are, for example: 1.2, 12, 120, 1200 (1K2), etc. This range is called the E12 range of preferred values because there are twelve steps.

The next range, called the E24 Range, increases in approximately 10% (plus or minus 5% of the value) steps. Most amateur radio projects can be built with resistors from the E12 range, although the odd E24 value might be required from time-to-time.

The standard range of values means that a limited set of resistors can be held that will serve almost any purpose. Several companies sell packs of resistors in the E12, or E24 ranges with 5 or 10 of each value in the range. Packs like this can make a very useful component starter pack for a beginner.

## **Simple Switching**

For most of the simpler switching operations carried out by hand from the front panel of a piece of electronic equipment, toggle switches are a good choice. Some amateur constructors like to use a

Fig. 1: Simple switches.

Top.
Single-pole on-off.

Middle.
Single-pole changeover.

Bottom.

Double-pole changeover.

much cheaper device, called a slide switch, but their unreliability is renowned and I avoid them! The three commonest types of toggle switch are

The three commonest types of toggle switch are shown in Fig. 1. The single-pole on-off switch is the simplest of all. A pair of contacts (A and B in the drawing) are closed and opened by the action of the switch.

The single-pole change-over switch does what the name implies. The centre contact, A, is switched between two other contacts, B and C, by the switch. In fact, this type of switch is more common than the single on-off types. This is because it can also be used for on-off application by simply using contacts A and B or A and C for the on-off operation.

The double-pole change-over switch is exactly like its single-pole counterpart except that two contacts are switched over: A to B or C and 1 to 2 or 3. The dotted line shows that the two 'switch-over' actions are performed by the same lever action.

#### Be Warned

Here's a timely warning for you! It might be assumed that the toggle lever of the switch points towards the contact that is being made. For example in Fig. 1, with the lever up as for the double-pole change-over switch, A and B and 1 and 2 would be connected. However, be careful as this is not so!

In most examples of miniature toggle switches, contact is made in the opposite direction to the way the lever points. So, it's wise to check before using any switch.

The 'old hand' would check the switch with the ohms  $(\Omega)$  range on a multimeter. Don't worry though, if you don't have a meter yet - you could check it with a battery-and-bulb 'continuity tester' to see which way the switch action occurs.

#### **A Practical Project**

It's nice to build circuits that do something, make sounds, flash lights, move meter needles and so on. This project does none of those, and in fact it does 'minus things' because it reduces signals.

The project might seem boring, but believe me, it's very useful. Every amateur radio shack ought to have a 'stepped attenuator'.

You may have seen a switch, or switches, on the front of a communications receiver marked 'attenuation'. To put it simply, these switches reduce the amount of radio signal going into the input of the receiver.

This might seem odd. You may ask me 'surely, we want as much signal as possible to enter the receiver?' My answer would be a qualified yes.


This answer will be because sensitivity may not be the most important factor that governs a receiver performance. The '**Dynamic range**' can often be more critical. The dynamic range is the range of signal strengths that can be handled at any one time by the receiver. Or put in simpler language, 'When listening to a weak signal, how big can a nearby signal be, without 'clobbering the wanted signal'.

## **Undesirable Effects**

A poor dynamic range can produce a range of undesirable effects in a receiver. Strong signals can 'desensitise' the receiver.

Other problems can occur. Odd signals can unexpectedly appear in the receiver, when a large signal causes unwanted signals to be generated by the 'mixing' circuits inside the receiver.

It's a complicated matter, but poor dynamic

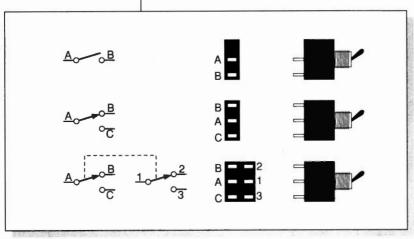





Fig. 2: A simple, one stage attenuator.

Fig. 3: This is the attenuator which you can build as a practical project. Note that this version consists of three attenuators joined in series.

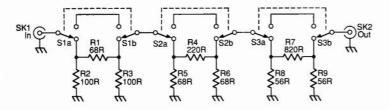

## **Shopping List**

#### Resistors 5%, 0.25W

#### **Switches**

Miniature Toggle: Double-pole Change-Over Maplin Type FH04E or Marco SW/SM/DPDT

#### Miscellaneous

Die-cast aluminium box, Maplin type LH70M or similar. The Marco type, BOX/27134PSL is slightly larger than the Maplin version. Phono Sockets (single hole mounting) 2 off. Wire, blank p.c.b. material or aluminium sheet for screens

Addresses: Maplin Electronics, PO Box 3, Rayleigh, Essex SS6 8LR, Telephone Orders (0702) 554161.

Marco Trading, The Maltings, High Street, Wem, Shrewsbury SY4 5EN. Telephone Orders (0939) 32763.

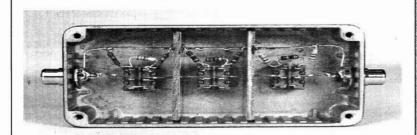


Fig. 4a. A view of the attenuator mounted in its box.



Fig. 4b.
Threequarter
view of the
finished
project.

range can seriously reduce receiver performance. An attenuator placed in the antenna input circuit of a receiver can often help!

The reduction in signal strength an attenuator provides, enables the receiver circuits to reject strong nearby signals although wanted, weaker signals at the tuned frequency can still be heard.

Attenuators are also used in equipment testing to vary the signal reaching the circuits under test. You'll perhaps now realise why an attenuator is an item whose usefulness will increase the more you learn about the hobby.

#### **Circuit Diagram**

A circuit diagram of a simple attenuator is shown in Fig. 2. If you're not used to circuit diagrams, this project will help, because the diagrams are simple to follow.

You can regard the circuit diagram as a 'map' of how the components are connected to make the circuit function. It's not an exact representation of how the circuit may look when built, but it does show how the parts connect.

The diagram looks rather like a London Underground map doesn't it? The circuit illustration shows where all the 'lines' go without showing how long they are, or exactly how they get from one place to another. In other words, the diagram shows routes without true scale or true direction.

#### Symbolic Greek

The type of attenuator we're using is called the Pi Attenuator. It's standard practice to indicate what the circuit is, by using the Greek symbol Pi or  $\pi$  which looks rather like our letter 'n'.

The circuit consists of three resistors combined to reduce a signal that passes from 'in' to 'out'. You might notice that the resistors used in the three sections all come from the E12 range I've already mentioned.

The diagram, Fig. 3, shows how three of these attenuator circuits can be connected in line to make a variable ('stepped') attenuator. The resistor values chosen depend upon two requirements that may have to be accepted at this stage rather than be fully explained.

The attenuator is designed to fit into a signal path at  $50\Omega$  impedance. Expressed simply, impedance is the resistance to current 'flow' that has to be overcome by the alternating current signals passing through the attenuator.

Antenna inputs for most receivers and many other types of signal in radio frequency work have an impedance of  $50\Omega$ . The second requirement is the amount of attenuation (or reduction) offered by each stage of the circuit.

#### **Discovering Decibels**

The level of signal reduction provided by the attenuator is expressed in decibels (dB). The decibel is a unit of power ratio by which increases or decreases in power steps can be expressed by a simple number.

One decibel (1dB) stands for multiplying the power by a factor of 1.26 times, which is a just noticeable increase in signal strength. So, a 5dB increase means that five just noticeable increases in signal strength have occurred.

An easy figure to remember is 3dB, which is almost the same as increasing the power by two. The decibel can be shown in plus or minus numbers to

show increases or decreases in level, and as our attenuator decreases the signal, it has -dB steps.

#### **Small Steps**

For many applications 10dB steps are small enough for practical use. The attenuator we've built offers steps of -10dB, -20dB and -30dB.

This means that signal reduction can be obtained from -10dB to -60dB in 10dB steps. This is made possible by switching the sections in and out of the circuit. Double-pole change-over switches permit the three stages to be either in the line, or they can provide a direct path (0dB) with no attenuation.

#### **Not Difficult**

The project is not difficult to build. It only requires you to drill a few holes in a metal box and being able to make good solder joints.

The three sections of the attenuator are separated by two screens. These can be made from aluminium sheet or doubled-sided printed circuit board material.

The box is a die-cast aluminium box type M5002 with external dimensions of 100 x 50 x 25mm, although any similar box would be suitable. The switches are evenly spaced, centrally mounted along the length of the box. The screens are cut to

fit into convenient slots on the inside of the box.

When you've made the screens, two small holes (1.5mm) are then drilled in the centre and to one side. The central holes carry the signal wires, which must be of pvc insulated wire.

The offset holes carry a 'grounding' (earthing') wire to which the bottom ends of the resistors are connected. This is a bare wire and 22s.w.g. (standard wire gauge) copper wire is ideal.

This wire is soldered to the screens, and it forms the soldering points for the 'bottom legs' of the attenuator resistors. The wires also connect between the grounding lugs of the input and output sockets. In the example shown the sockets are of the inexpensive 'phono' type, but other types of socket could be used.

#### **General Guide**

A general guide to building the attenuator is shown in Fig. 4a and 4b. Use it as a guide to suit whatever box you can find, or copy it by using the same type of box.

To test the attenuator, you should place it between the antenna and the input of a receiver. Try combinations of the attenuation on different bands under varying conditions. As your understanding of radio grows, the usefulness of your attenuator will soon be proved.

PW

Join me next time as we explore the fascinating world of hobby radio together.

# BARGAIN BASEMENT

WANTED Yaesu FT-102 ANT Unit. Yaesu SP 102P Loudspeaker Unit. Yaesu FV-102 DM v.f.o unit. 1000W dummy load 50 ohms impedance. Plus h.f. wavemeter - Good one. Mr P. J. Brouder G3ZJH, Aldebaran, 169 North Road, Stoke Gifford, Bristol BS12 6PH. Tel: (0272) 691025.

FOR SALE FT-101EX Transceiver with a.t.u., s.w.r. meter, mic, key, phones. Complete working station, ex silent key, £250 (o.n.o.). Mr R. Palmer, 8 St Francis Road, Blackfield, Southampton SO4 1XU. Tel: (0703) 89420.

WANTED 70cm module for FT-726 Yaesu. Bird Elements for 144/432MHz. Mike Mundy G0GNV, Volks Haven, 124 Junction Road, Worlds End, Burgess Hill, West Sussex RH15 0PZ. Tel: (0444) 241407.

FOR SALE OR EXCHANGE Hitachi Midi-system, 4 bands, twin cassette, detachable speakers. Mint condition. Wanted Matsui MR4099 or Tatung TMR 7602. Same condition. Mr A. Stapleton, 130 Sherwell Valley Road, Torquay, Devon TQ2 6EX. Tel: (0803) 605045.

FOR SALE FTV-107R 2m transverter £95. FT708R 70cms hand-held £110. Grundig TK144 reel-to-reel recorder £45. Epson MX100/III printer £95. Telescope 3" refractor £150. Exchange Atari 1040ST, IBM-PC, general coverage h.f./rx, offers? Mr D. W. Howard G1AJB, Rame Common Farm, Carnkie, Helston Cornwall. Tel: (0209) 860297.

FOR SALE Trio VFO 520 £45. Memory keyer, 8 x 50 characters, pos/neg outputs, mains/battery, sidetone £60. Both post extra. Mr K. Smith G3RB, 78 Thomtree Drive, West Monkseaton, Whitley Bay, Northumberland NE25 9NW. Tel: 091-2530504.

FOR SALE Yaesu FT-726 complete with 50, 144 and 430MHz boards, also 'satellite' board, £850. Fax-1, £175. Spacetech satellite receiver £50, Buyer to collect. Mr R. Fuller, 35 Chichester Walk, Wimborne, Dorset BH21 1SL. Tel: (0202) 882269

FOR SALE OR EXCHANGE IBM AT 'clone' 12MHz with 640K RAM, 2 x 32Mbyte disks, 5.25"+3.5" floppies, VGA mono, 1Par/2Serial ports. Genius mouse included. Ideal for d.t.p. or graphics. £650 or offers. Would consider exchange for a dual-band v.h.f./u.h.f. base station or w.h.y. Contact G1TEX ('Tex') at PW editorial offices.

FOR SALE OR EXCHANGE Receivers in very clean condition. Bendix radio compass MN26C working. RAF v.h.f. beam-approach R1147/b ref 10D/13129 boxed. American Nova tech airband valved general coverage plus v.h.f., £15. Mr B. D. Tipper G3WWL, 271 Blackberry Lane, Four Oaks, Sutton Coldfield B74 4JS. Tel: 021-353 8874.

WANTED Technical details on the HRO-M communication receiver, circuit diagrams, layout, w.h.y. Mr A. Couchman, 3 Manor Grove, Sittingbourne, Kent ME10 1LT.

FOR SALE 5V 30 amp p.s.u. £20 plus postage. Colin Redwood G6MXL, 45a Lulwortth Avenue, Hamworthy, Poole, Dorset. Tel: (0202) 665284.

WANTED Satellite TV - A Laymans Guide. Wireless; The Crucial Decade, 1924-1934. RS; Dilecon variable tuning capacitors, solid dielectric type, 500pF. For Sale Practical Wireless mags 1955-1977 (not full years) 15p each. SAE for list, postage extra. Mr M. B. Evans, 120 Loughton Way, Buckhurst Hill, Essex IG9 6AR

Practical Wireless, April 1991

Now you can buy and sell your equipment in the new PW 'Bargain Basement' readers' advertisement feature for only \$2.30! (Free Service To PW Subscribers' Club Members).

The rules are simple. You can advertise any radio, electronic or associated equipment for sale or wanted. PROVIDED it can be legitimately used in the UK. You could raise money for your new transceiver or w.h.y.. by advertising your video camera or other consumer equipment for sale in 'Bargain Basement'.

The advert itself must not exceed 30 words, plus 12 words for the address. You must enclose your full address, post code, telephone number and callsign where appropriate. Subscribers' Club Members must include the dispatch label bearing their address and subscription number to qualify for their free advert.

All adverts MUST be typed or handwritten in BLOCK CAPITALS and be accompanied by the corner flash printed in PW, a £2.30 cheque (payable to PW Publishing Ltd.) and a stamped, addressed postcard if you would like an acknowledgement. No corner flash or label - no advert! (photocopies not acceptable).

The postcard will be used to acknowledge receipt of your advertisement. All adverts will be used in strict rotation. No trade adverts accepted and no responsibility will be taken for errors. Please make your requirements as clear and concise as possible.

Address your adverts to: Donna Vincent, PW Bargain Basement', Enefco House, The Quary, Poole, Dorset BH15 1PP.

Readers' Ads April 1991 Coupon

RST MAIL ORDER CO. LANGREX SUPPLIES LTD, 1 MAYO ROAD, CROYDON, SURREY CRO 20P. SPECIAL EXPRESS MAIL ORDER SERVICE

	£p							6SC7	3.00
AZ31	4.00	EM81	2.50	PY81	1.50	6AS8	6.00	6SG7M	2.50
		EM87	2.50	PY82	1.50	6AS7G	9.50		2.50
CL33	8.00	EN91 Mus	7.50	PY83	1.50	6AT6	2.00	6SJ7	3.00
DY86/7	1.50	EY51	3.50	PY88	2.00	6AU5GT	5.00	6SK7	3.00
DY802	1.50	EYB6	1.75	PY500A	4.00	6AU6	2.50	6SL7GT	4.50
E88CC	6.95	EY88	1.75	PY800	1.50	6AW8A	4.00	6SN7GT	4,50
E180F	4.50	EY500A	3.00	PY801	1.50	6B7	4.00	6SS7	3.00
E810F	25.00							6U8A	1.50
EABCBO	1.95	EZ80	1.50	QQV02-6	19.50	6B8	4.00	6V6GT	4.25
		EZ81	1.50	QQV03-10	5.00	68A6	1.50		4.25
EB91	1.50	GY501	3.00	QQV03 10 M		6BA7	5.00	6X4	3.00
EBF80	1.50	GZ32	6.50	QQV03-20A	25.00	68E6	1.50	6X5GT	2.50
EBF89	1.50	GZ33	4.50	QQV06-40A	Muli40.00	6BH6	2.50	12AT7	2.25
EC91	6.50	GZ34 GE	7.50	QQV06-40A		63.46	2.25	12AU7	2.25
ECC33	7.50	GZ37	4.50	QV03-12	10.00	6BN6	2.00	12AX7	2.25
ECC35	7.50	KT61	7.50	R18	4.00			12AX7A GE	7.00
ECC81	2.25					6BQ7A	3.50	12BA6	2.50
		K766	15.00	R19	3.00	6BR7	6.00		
ECC82	2.25	KT66 GEC	30.00	SP41	6.00	6BR8A	4.00	12BE6	2.50
ECC83 Semen		KT77 Gold Li		SP61	4.00	6B\$7	6.00	128H7A GE	6.50
ECC85	3.50		P.O.A.	U19	10.00	68W6	4.50	128Y7A GE	7.00
ECC88	3.50	KT88	15.00	U25	2.50	6BW7	1.50	12E1	20.00
ECC91	2.00	N78	9.00	U26	2.50	6BZ6	2.50	12HG7 12GN7	
ECF80	1.50	OA2	2.70	U37	7.50	6C4	1.95	30FL1/2	1.50
ECH35	3.50	OB2	2.70		1.50	6C6		30P4	2.50
ECH42	3.50			UABC80			3.50	30P19	2.50
ECH81		OC3	2.50	UBF89	1.50	6CB6A	3.00	30PL13	1.50
ECH81	3.00	OD3	2.50	UCH42	4.00	6CD6GA	5.00		
ECL80	1.50	PC86	2.50	UCH81	2.50	6CL6	3.75	30PL14	1.80
ECL82	1.50	PC88	2.50	UCL82	2.00	6CG7 GE	5.25	5728	70.00
ECLB3	3.00	PC92	2.50	UCL83	3.00	6CH6	6.00	805	50.00
ECL86	1.75	PC97	2.00	UF89	2.00	6CW4	8.00	807	5.00
EF37A	3.50	PC900	2.00	UL41	10.00	6D6	3.50	B11A	18.50
EF39	2.75	PCF80	2.00					812A	52.50
EF40	5.00			UL84	2.00	6DQ5 GE	12.00	813	27.50
5F41	3.50	PCF82	1.50	UY41	4.00	6DQ69	9.50		
	3.50	PCF86	2.50	UY85	2.25	6EA8	3.50	866A	25.00
EF42	4.50	PCF801	2.50	VR105/30	2.50	6EH5	1.85	872A	20.00
EF50	2.50	PCF802	2.50	VR150/30	2.50	8F6	3.50	931A	25.00
EF54	4.50	PCF805	1.70	7759	35.00	6GK6	4.00	2050A GE	10.00
EF55	3.50	PCF808	1.70	Z803U	25.00	6H6	3.00	5763	10.00
EF80	1.50	PCH200	3.00	2021		6HS6	4.95	5814A	4.00
EF86	5.00				3.50			5842	12.00
EF91	1.95	PCL82	2.00	3B28	20.00	6J5	3.00		
EF92	2.15	PCL83	3.00	4CX250B		6.16	3.00	6080	8.50
		PCL84	2.00		AC 62.00	6J7	4.00	6146B GE	15.00
EF183	2.00	PCL85	2.50	5R4GY	6.00	6JB6A GE	9.50	6550A GE	15.00
EF184	2.00	PCL86	2.50	5U4G	5.25	6JE6C	9.50	68838 GE	16.00
EH90	1.75	PCL805	2.50	5V4G	4.00	6JS6C GE	11.25	6973	11.00
EL32	2.50	PD500	6.00	5Y3GT	2.50	6K6GT	3.00	7025 GE	7.00
EL33	7.50	PFL200	2.50	523	4.00	6K7	4.00	7027A GE	12.50
EL34 Mullard	10.00	PL36	2.50	5Z4GT	2.50	6K8	4.00	7199	10.00
EL34 Siemens		PL36 PL81				6KD6 GE		7581A	12.00
EL36	4.00		1.75	6/30L2	1.75		11.95	7581A GE	12.00
ELL80	25.00	PLB2	1.50	6AB7	3.00	6L6G	8.50		11.95
		PL83	2.50	6AH6	4.00	6L6GCSYL	9.50	7586	15.00
ELB1	5.00	PL84	2.00	6AK5	4.50	8L6GC Siemes	ns 4.50	7587	23.00
EL84	2.25	PL504	2.50	6AL5	1.00	6L6GC GE	9.50	7868	8.50
EL86	2.75	PL508	5.50	6AM6	1.95	6L7	3.50	8068	15.00
EL91	4.00	PL509	6.00	6AN5	5.00	6LQ6	9.50	8068 GE	16.50
EL95	2.00	PL519	6.00	6AN8A	4.50	6Q7	4.00	8417 GE	11.50
EL360	18.50	PL802							
EM34			6.00	6AQ5	3.25	6PHH8/6KN8	12.00	Prices correc	
CM34	P.O.A.	PY33	2.50	6ARS	25.00	6SA7	3.00	going to s	cyess
		<u> </u>						-	

Tel. 01-684 1166 VISA Prices excluding VAT add 15% Open daily to callers Mon-Fri 9am-4pm — Closed Saturday Valves, Tubes and Transstors, Over 6000 types available from stock.

Terms C.W.O. and Visa Cards accepted Orders despatched by return.

Quotations for any types not listed S A E.

Post and packing £1.00 per order + VAT

Telex 946708



DATONG West Park
Leeds LS16 6QE
Tel: 0532 744822

Clayton Wood Close Fax: 0532 742872



For information on Active Antennas, RF Amplifiers, Converters, Audio Filters, the Morse Tutor and Speech **Processors** send or telephone for a free catalogue and selective data sheets as required.

All our products are designed and made in Britain. Orders can be despatched within 48 hours subject to

availability.

- VISA AND ACCESS WELCOME






## TM SERIES MULTIMETERS **D-MM Good Value!**

The TM series of low cost meters, with 31/2 digit LCDs, full overload protection, strong ABS case and packed with features. Supplied with test leads, battery and manual.


TM 5315	DC current (10A) continuity and diode test	56-05315	£19.99
TM 5365	Capacitance and frequency (200kHz) ranges	56-05365	£37.90
TM 5375	Frequency range (20MHz) and HFE test	56-05375	£36.75
TM 115	AC & DC current (10A), HFE and		
	continuity test	56-00115	£33.67
TM 135	Capacitance and temp. ranges (inc. probe)	56-00135	£45.95
TM 175	Frequency (15MHz) and capacitance		
	ranges and HFE, diode, continuity and LED test.	56-00175	£57.49
7705	Capacitance meter, 1pF to 20,000uF	56-07705	£38.98

## BLACK STAR

Top quality, UK made, frequency counters and generators.



Meteor 100	100MHz counter	56-00100	£125.35
Meteor 600	600MHz counter	56-00600	£155.25
Meteor 1000	1000MHz counter	56-01000	£204.70
Apollo 100	100MHz counter/timer	56-10100	£339.25
Nova 2400	2.4GHz counter	56-02000	£343.85
Jupiter 500	500kHz function generator	56-00500	£126.50
Jupiter 2000	2MHz function generator	56-02001	£171.35



## HAMEG 'SCOPES

All Hameg scopes are supplied with two x 10 probes, mains lead, manual and 2 year warranty.

HM203-7         Dual channel, 20MHz         56-5203           HM205-3         Digital storage, 20MHz sampling         56-5205           HM604         Dual channel, 60MHz         56-5004           HM1005         Triple channel, 100MHz         56-0100	£701.50 £701.50
HM604 Dual channel, 60MHz <b>56-5604</b> HM1005 Triple channel, 100MHz <b>56-0100</b>	

Full details of all the above are included in our comprehensive catalogue, £1.60 (inc. P&P).

All the above are currently in stock and available for immediate delivery. Standard P&P £1.00, next day delivery £4.50.



Cirkit Distribution Ltd. Park Lane, Broxbourne, Herts EN10 7NQ. Telephone (0992) 444111.

# Back-Scatter

For this month the most important event has to be the outbreak of the Gulf War; just what its impact on our hobby will be in the long-term is anyone's guess. Let's just hope things don't escalate to a point where activity is seriously affected in some countries or, worse, a QRT is enforced upon us.

#### The Bands

At the time of writing I can look out upon snow-covered hill-tops, but on the bands I've had a longish good spell during the last month.

#### The 1.8MHz Band

Here I'm pleased to note that the Top Band Newsletter for January 1991 has arrived, ably penned by G3RBP and G3XTT, and in the direct line of succession from the W1BB and VE3DO efforts. Now they need SUPPORT, which means sending a couple of IRCs plus a self-addressed envelope for each issue. As lunderstand it. you can have credits in hand this way for several issues. The intent is to more-orless cover costs but to subsidise copies to 1.8MHz operations in those places where IRCs or foreign currency are difficult to obtain. The address is: Roger Parsons G3RBP, 32 Windmill Lane, Ashbourne, Derbyshire DE6 1EY. More power to their elbow, say I, and Top Band will be the better for their efforts. However, the other thing they need is INPUT, from the 1.8MHz DX fraternity both UK and abroad.

An interesting sidelight on the activity level on Top Band is that while 1.8MHz was the UK's prime natter-spot, W1BB took some 28 years to achieve the first DXCC in 1976; but since nattering on 1.8MHz more or less ceased in favour of v.h.f., the number of people achieving this target of 100 countries confirmed has mushroomed to 250-plus around 53 countries to the end of 1989! The reason is the vast increase in the number of countries having access to the band and of expeditions taking 1.8MHz equipment along.

Talking of nattering, the Tuesday evening 1900 Powys ARC net on 1.932MHz give-and-take the QRM, seems to be noted by lots of people around the country - and nothing pleases us more than to chat.

This month **G3BDQ** (Hastings) notes that he hasn't been very active on any band of late but he did manage to work T77C, VE1ZZ, K1JO, ND1T, UW3PN, UC2WEH, IOUZF and VK6HD - the latter peaked to R5S7 both ways from his new QTH.

Turning to **G2HKU**, Ted worked ON7BW on s.s.b., while the c.w. gave W4QM/MM off Tunis and OK1DWJ.

#### The 3.5MHz Band

The 3.5MHz band is another area where DX is a minority activity. **ON7PQ** (Kortrijk) notes that he is nearly complete on 5BWAZ, having now only seven zones needed, all on this band. His c.w. exchanges took place with K2OPJ, KUOS, UG1700GM, V73AS, VS6BG, 6W6JX, YAORR, N6ND,

**HF Bands** 

Reports to
Paul Essery GW3KFE
287 Heol-y-Coleg, Vaynor, Newtown, Powys SY16 1RA

CO8LY, 4K2/UV3CC, ZL4IE and 4K2OIL; the YA, VS and V73 being new ones on the band.

Recently **G3NOF** (Yeovil) has been on the band, and made s.s.b. QSOs with EA8/ G0GPW, KE1Y, SV9AKI and VE2AFJ.

Now to **GOKRT** (Welling), who has been on the air since July 1989, always with QRP c.w. on this band. This time the QRP Winter Sports gave him GOFOD, GODRT, GOFYP, GONRL, G3LQI/M (narrowboat *Moorlands*, on the Grand Union canal), G3YHO, G3IRW, G3OSJ, G4ECI, G4FGI, G4JJN, G4YYR, G4JZO, G4ZZB, and ON5AG; outside the event there were a half-dozen Gs, PAOZEZ, and IK1PQT for a new country.

It was s.s.b. on 3.5MHz for G3BDQ; John notes JA6XMM twice, VK2CWG and CNRAR

Sad to say, **GM3JDR** (Aukengill) had a short list to offer as he has been laid up with chickenpox for three weeks; indeed on the day he wrote he had had his first step outside for a fortnight. However, JABEAT, JAOCWZ, JL1ARF, JA1HQT, and UA0QAE were worked on the key around 0800-0900.

Turning to Mike **GW0HWK** (Wrexham), it may be recalled he hoped for lots of time in the shack this time, until the TV set protested! The problem seems to have been due to water in the outside TV pre-amp or splitter as it cured itself in the end. The score then, on 3.5MHz included 6W1QC, A92BE, W4QCU, 0K3TKW, G3HVH, G4XDK, G30QT, G4HMC, Y03GK, G4VDA, GW0LAL, G0LJR, G4PEL, Y02BHL, G4RFA, G0JDQ, G3MTQ, GM3HGA and OZ8DX.

For this month's report G2HKU (Sheppey) dug out his QRP rig on 3.5MHz, and used it to key with OK2BTT, DK7QB, OK2PAW and DK5VD.

#### The 7MHz Band

In general, people who specialise in this band seem to keep quiet about what's what. Despite this, ON7PQ, mentions his c.w. contacts with 9M6/JH1ROJ, 4K2/UV3CC, VS6BG and YAORR.

Turning to G3BDQ, we find John tackling W3GET, 4X/YU3PR, VU2TEC, VK4XA, VK2BJ, JG3ZDK, UA9LQ, UA9SLK, HL1KXS and UL7GDX, all of course on the key

Up north of Wick, GM3JDR keyed into 4K2/UV3CC, RA0SHQ, UA0LH, UZ00WS, UZ0AXX, VS6DO, VK3RP, VK2BJ, 8P6AU, FY7YE, VU2PCD, ZS9Z/1, 6Y5IC, 3W4BK, YC0UNC, 9N1HMB, UJBJF, HL1CG, JT1CO, UA0AMV, UA0WO, PY1AFL, UG1700GDS, UG1700GAW, C08LY, 9Y4SB, RA0BA, BV2CE and UA0ZAS.

Westwards now, to GW0HWK, who offers VE3GAS, U05PE, TK/DL7HZ, GW0LAL, EI4CY, GJ4YCR, CT1ABE, FG5FC, UB4WWW, RC0A/UC2W0, LY2BJA, OK3TKW, DL1NCH and CU2BQ.

From the Isle of Sheppey, G2HKU used c.w. to contact T77GM, W4PLL, K4FU, UA9MJA, UL7VB and U3DR.

#### **WARC Bands**

Let's make a start with ON7PQ. Pat found 10MHzc.w. signals from 4K2/UV3CC, YAORR and KE9A/DU3. While on 18MHz the haul was 6W6JX, C30CAG, 4K20IL, ZC4CZ, TU4CO/TT8, 4Z4DX, and C9EC, leaving for 24MHz TF3EJ, ZL3GQ, VS6BG, TU4CO/TT8, 6W6JX, 4K2/UV3CC and C9EC.

Now to GW0HWK who offers 24MHz contacts with VK8HN, 6W10J, YQ3R, KA2CYN, KE8FG, SV1AKW, EA7ABW, WA4BWB, KF2X, KZ4V, N0DH, N5FA, N4UCK, N8AYC, N4LUF, V51KC,W1DW, EA9UA, K1ZSE, and some smaller fry.

On these bands G2HKU stuck to his keying; 10MHz gave ZP6XDW, W8EGB, KP2A, W1FZY, W2BA; 18MHz W4QM/MM, and on 24MHz ZP6XDW, W1HT, N2JFD, N4CR, W2BA, W6VD, N5VV, W6DU, W4QM/MM.

Up in the north Midlands **G4ZZG** (Mansfield), notes that as well as having the XYL laid up for three weeks, he lost electric power and mains water (pumped from underground) for five days. In addition the 18MHz dipole went for a 'Burton', but the minibeam on its home-brew telescopic mast coped admirably. Despite all the problems, Charles managed to find, on 18MHz, J6LNJ, C31BB, VE7SR, 4K2/UV3CC in Franz Josef Land, EUs, Ws and USSR stations assorted.

In Yeovil, G3NOF had a 'go' at 18MHz, with RF0FWW, and then went to 24MHz to raise AP2JZB, C53GH, C6ANX, CN8MC, C06CG, CU3LF, EA8/GGPW, GM3NQA, HK5LEX, JR2KDN, NZ7E (Nevada), NZPBX likewise, OA4CBN, PZ1EL, RA9YD, RC2CR, SV5FD, TI2KD, U7FFWR, UJ8JCQ, V51KC, VE7CUL, VK3CTT, VK3EO, VK8HN, VP2VE, VU2RX, W7HLK (Arizona), W7MAD (Montana), W7ZJ, YQ3R, ZS1ACY, 5R8GN, 6Y5IC. 9H4CM and 9Q5TE.

#### Comments

It's good to welcome **GOGQP** who writes a first letter to 'HF Bands' from Bletchley, and says that he also worked UB4UHP, the YL operator mentioned recently by G3JMO. Dave says he found her very friendly and ready to 'chat' and to QSL direct. Apparently her mother taught English which accounts for her fluency, and she said her rig was a home-brew to the UW3DI design, into a ground-plane up at 45m.

#### The 28MHz Band

When it's good, great, but when it's dead, nix! ON7PQ looked through the openings to key with 8Q7BX, YAORR, XU8CW, C9EC and HL0KOI.

GOGQP says he uses the band between about 1100-1300 most days. Of course there are the usual East Europeans and USSR signals to be found, but in addition he heard ZS6RF, talking to his son ZU1B, (a novice licence?), VK6 several times, A92EV, PV8AAL, VP8CEX, VO1TX, CN8NY, VK5EK and so on. On January 7 a CQ call at 1100 started a string including CT1, UV3, UW9, VP9, VK3, WP4, U05, KA2 and K3 before close-down at 1318z. All these QSOs were on s.s.b. but c.w. was used for OH8LED, KA1JVF, W4LVP and OH6MDM.

Now to G3NOF who stuck as usual to s.s.b. and found DU1COO, DU1DDP, FM5DN, HKOTCN, HL1AHS, KF7NR (Arizona), TRBXX, UA0SKO, UIBUAA, UL8NMV, VE7BWO/W6, VE7DGM/A7, VE7FJE, VP2VE, VS6AK, V8U2DNL, VUZJYY, W5JJU for IOTA NA-58, XE1REB, YAORR, ZDBCUE and ZF2PX.

For this band G3BDQ offers 9J2VH on c.w., plus s.s.b. to HC5Z and VS6DL. Another short report this month was the one from GM3JDR who only managed 7S97/1

For GW0HWK, the score benefited to the tune of 3DA0AY, ZL3CQ, W2FV/0, K9EIC, N3BAW, WB3EML, WA7HRR, VK6ME, YQ3R, KA1CNG, N7NHV, KA0WTA, K6GCF, W7LTH, K0REF, N4YAM, K1CSB, CT1DL and ZS5ADB.

This time G2HKU seems to have had a benefit on the band, with XE2MX, YV1NX, UV0BB, K7U0T, W60V, LU1ICX, K1RH, RB5FQ, N3GMA, K4KQ, K1HZ, KM4WL, WA7CWM, KE2WY, WT7F/8, W6DU, W5TCX, W1HMD, K8CIT, YN1CC, N2IF and 3W4DK.

Up in Scotland, s.w.l. Scott in Glasgow runs a Kenwood R2000A into a T antenna of some 20m. He mentions PJ1B (1600Z), 8P9X, VK5EX(S. Australia (1030Z), KC4RHW, Antarctica(1337), C53GH(1155), HK5FWW(1215), TA5C(1302), and YI1BGD at 1306z - this last has not been about much lately!

For G3ZZG and his key, the band provided PY2IBS, RA9LL, VE3NXB, VU2KB, UA9MHN, UZ9WWR, LU1IXC, COBRL, KP4YD, plus Europeans, European USSR and Ws.

#### The 21MHz Band

All the Fun of the Fair! ON7PQ got on the roundabout with his key and scored 5V7AK, YAORR, JF2POF/JD1, and BY5RA.

Down in Somerset, G3NOF was able to collect prize s.s.b. contacts with A41KF, A41KY, AP2ZR, BZ4RBH, C30EOE, FY5AN, HL5FBT, HL5FRG, RV9CFP, TR8AHO, UM8TBE, UV9CBU, UZOWWL, VK2DTN, VK3MEY, VK7NCO, VS6BT, YAORR, 6W1NQ, 7K1NWR and 9Q5US.

The c.w. of G3BDQ made it to HL30AP, 5V7AK, YF0AQD, but not alas, YA0RR. However, all was well because a couple of days later YA0RR was heard on sideband and hooked first call....some you win, some you lose!

## The 14MHz Band

On 14MHz we start with G3NOF. Don mentions A71AD, A71AL, BV2FB,

# Back-Scatter

CQ9WDX, HE7IQB, OX3KM, TU2PA, VE7BYS, VU2JPT/MM, YB8BYS, YK1AO, SZ6AZQ, 5H3DC. The latter comes from Yeovil and has a sked with home, 14150 Tuesdays, 1930z, and he is pleased to work UK stations after this QSO.

For his effort GW0HWK raised KA2CIK and then changed bands!

Another singleton came in from G3BDQ

who worked OT7XT on the key, and wonders whether it might have been Antarctica!

On this band G2HKU used s.s.b. to raise ZL3FV. As for the keyer, it managed UA/Q0QHN and UT0/UB4MM.

Finally, ON7PQ wraps it up this month by reporting his c.w. QSOs with TU4CO/TT8, YAORR, OE5NOK/ZL5, 4K4AB, C9EC, and UZOQYY/4K4 for lota AS-22.

#### Famous Last Words!

The deadline for the incoming stuff to me-your input - is to reach me each month by the first of the month, addressed as above. If it's late, of course it 'misses the bus' and gets held over to the following month which makes for stale news! And of course we can always use more letters and

piccies of you and your station. The idea is to show the personality behind the call. Get those shutters clicking!

WE'VE HEARD THE CALL SIGNS, NOW LET'S SEE THE FACES!

#### Solar Data for January 1991

The first few weeks of January saw very little solar input. During the period January 1-11, the solar activity ranged from low to moderate and the geomagnetic field was quiet to unsettled. The early part of the second week proved to be the most energetic, with a number of M-class flares being observed on January 8. The first flare occurred at 0434UTC, lasting for 61 minutes, the second at 0656UTC lasting for 20 minutes, and the third at 1127UTC, lasting for 32 minutes.

The period from January 12-20 also saw very little solar input. The only event of any significance being a major flare at 1502UTC on January 17. During the last two weeks of January there was a major burst of solar activity. Flares occurred on January 21, 23, 25, 27, 29 and 31. The event, at 0625UTC on the 25th, measured 3500 flux units, among the highest recorded during Cycle 22. Later on, at 1730UTC, a brief 'Scottish-type' aurora, effecting the v.h.f. bands from 50-144MHz, enabled stations situated in northern and central England to make many contacts. This surge of activity was not unexpected, especially as we have now entered the period February-April, when increased geomagnetic field activity causes a rise in radio auroras. During January, the solar flux index rose from 173 units on the 3rd to peak at 367 units on the 30th.

The geomagnetic A index remained mostly quiet during the month but peaked at 15 units on the 3rd, and 14 units on January 13, 24 and 31. A stratospheric warming alert, commenced on January 2 and lasted for most of the month. These warnings are issued whenever abnormally high temperatures are observed in that area between the troposphere and ionosphere, called the stratosphere. Large areas of intense warming can cause atmospheric expansion sufficient to increase drag on low orbiting satellites. such as the OSCAR series. There is also some evidence that these events may cause changes in atmospheric circulation and weather patterns. Although stratospheric warming can be caused by intense solar activity, it is more often associated with natural processes occurring in the earth's atmosphere.

#### **Forecast**

March may be somewhat of a mixedbag for v.h.f. openings. There is a possibility that an increase in solar activity may cause



## VHF Up

Reports to
David Butler G4ASR
Yew Tree Cottage
Lower Maescoed, Herefordshire HR2 0HP

sudden ionospheric disturbances (SID), short wave fade-outs (s.w.f.) and auroral openings on all bands from 50-430MHz. This increase in activity could raise the solar indices to levels sufficient to provide good openings on the 50MHz band. The trans-equatorial path (TEP) should be excellent, allowing contacts, up to 10 000km, to be made into southern Africa and maybe even South America. The best times for contacts into ZS will be around 1600-1800UTC, with openings into the LU/ PY area occurring about three hours later. Some of these openings will be via t.e.p. or they may include a path enhancement, via Sp-E, at the UK end. In this latter case, there is a possibility that signals will arrive at your QTH on a non great-circle bearing. In some instances incoming signals may peak on beam-headings up to 60° off the true bearing. The far east path to Oceania should also be open on a number of mornings during March. If conditions are right, the band will be open to VK or VU between 0800-1130UTC, as indeed they were on a number of days during February. Once again, be prepared for signals arriving on obscure beam-headings.

#### The 50MHz Band

Band openings during January were very similar to that of the previous month. The African path was open on numerous occasions, especially for those fortunate to be located in southern England. The last few days of January, from the 26th, saw an enhancement in the east-west path, enabling many contacts to be made into the North American continent. During January, the band also supported propagation to South America via F2 and into Europe via Aurora, F2 backscatter and Sporadic-E. This state of affairs continued through to the first week of February and saw some excellent long distance propagation into Australia and the Philippines, but more about that in next month's column.

First of all the African openings. Ted Collins G4UPS (DVN) started the month off by hearing TU4DH, at 0943UTC on January 1. He also heard TU2EW, 6W1QC and 9L1US. Conditions were good later in the day with TU2EW, TU40H and 9L1US all being heard again from 1520UTC. On the following day, at 1150UTC, Chris Gare G3WOS (HPH) found TR8CA working c.w. on 50.090MHz. A quick exchange of reports was made before Chris went to look for more DX. A few minutes later at 1208UTC, he worked TU2EW on s.s.b. Openings into Africa continued unabated during January, although once you had worked TR8CA, TU2EW, TU4DH, 6W1QC and 9L1US, the band became less interesting. In Jersey, GJ4ICD observes that he had an almost 100% daily path reliability from 9L1US during the month. Unfortunately, he missed a few days because of work! Propagation extended a little further to the south on January 16, with the ZD8VHF beacon (50.0325MHz) being heard by a number of stations

You had to be really keen to work into South America but nevertheless the openings were there, albeit very briefly. On January 1, Geoff Brown GJ4ICD heard the FY7THF beacon (50.039MHz) peaking 599+ from 1130-1242UTC. At 1212UTC he worked PZ1AP on c.w. 559 bothways. G4UPS heard PT7NK in beacon mode at 1044UTC and the FY7THF beacon at 1150UTC. Conditions were again reasonable on January 15 with G4UPS hearing FY7THF at 1140UTC, GJ4ICD hearing PT7NK and the YV5ZZ beacon (50.045MHz) at 1210UTC and Neil Carr GOJHC (LNH) working PZ1AP at 1245UTC. Not much else was heard from South America until January 26, when Richard Lax G4AHN (SRY) heard HC1BI in Ecuador, at 1315UTC. A very good opening into FY, PY. PZ and YV occurred on January 30, with a number of stations throughout the UK managing to work the DX.

Openings into the North American continent were observed during the last

## 144MHz QRB Table

Station	Tropo	Aurora	Meteors	Es
GOCUZ	2943	1758	1996	2943
G00AZ	2923	1780	2026	2923
G00KM	2811	1488		2203
G0EVT	3080	1640	1808	3080
GOFYO	1315	1624		2019
GOISW	1059	566		2057
GOLBK	3060	1755	1876	2350
G10WQ	1454	1812		1836
G1EZF	1730	1757	1920	2375
G1KDF	3023	1421	_	2386
G1LSB	1319	733	1732	2723
G1SWH	3035	1429	1650	2372
G3FPK	1835	1686		2337
G3LTF	1824	1846	2021	2174
G3SEK	1560	1681	1872	2154
G4ASR	2848	2029	2107	2853
G4DHF	1498	1530	2000	2448
G4JCC	1334	1158	1018	2173
G4MUT	1163	684	1533	2068
G4NBS	1321	1714		1901
G4RGK	1466	1757	1920	2375
G4VXE	2862	1446	1501	2880
G4YTL	1450	1774	2025	2172
G4ZTR	935	1535		2130
G60ER	1834	997	1957	2068
G60ZH	2924	711		2233
G6HCV	2880	1450	1912	2880
G6HKM	1304	1555		2265
G6LEU	2620	910		2430
GBHHI	1742			2058
G8J0X	2667	1368		2663
GBLHT	3070	1780	1868	2510
G8MFJ	1209	1210	1329	2168
G8PYP	1240	1451	1479	2318
GO4XTT	3053			1700
GI1JUS	3067	1614	1507	2216
GI8YDZ	1216	1809	1901	2562
GJ4ICD	1620	1100	2050	2090
GM4CXM	1428	1750	2100	2023
GM4YXI	3160	1881	2048	2513
GW4VVX	2823	1391	1313	1910
GW6VZW	2830	1473		2236
ON1CAK	1420	1166	1948	2725
ON1CDQ	1420	1166	1948	2124

week of January, although GJ4ICD had a brief opening on January 9, working K11KN, K1JRW, K1TOL, VE1BVL and VE1HO, On the previous day, VE1BVL copied the GB3IOJ beacon (50.0655MHz) but very little else seems to have been worked. During the period January 25-31, the band was open daily, around 1230-1400UTC, to W1, W2, W3 and VE1. On January 30, conditions were particularly good, the opening stretching to W4, W8 and W9. At 1241UTC, G4UPS heard KP2A on c.w. peaking 559. To round off the month, GJ4ICD also heard KP2A, on January 31 at 1208UTC, but no contact was made. Geoff, incidentally, is now well on his way to DXCC, 100 countries confirmed on 50MHz. He notched up country 101 during the first week of February and is now waiting for the QSLs to arrive

Apart from the real DX via F2 propagation, other modes such as meteor scatter, Sporadic-E and aurora were also observed during January. The Quadrantids



shower on January 3-4 provided much activity for G4UPS. He managed to work OZ1ABE, OZ3ZW, SM7AED and SM7FJE. lan Galpin G1SMD (DOR) however was disappointed with the m.s. activity as he only heard a few GMs on 50.350MHz and failed to work anyone. He wonders what has happened to all the 1987-88 activity? lan also reports that during the Perseids. Geminids and Quadrantids showers, a number of European stations were operating within the DX window, 50.100-50.130MHz. Until recently he could not understand why many were operating in contravention of the IARU bandplan, but all was revealed recently when a well known G station was heard on 28.885MHz, claiming that the frequency to use for European m.s. working was within this DX window. Clearly, this is totally wrong. The correct frequency to use for m.s. working is 50.300MHz for c.w. and 50.350MHz for s.s.b. As lan comments, 50MHz is a large band and most European countries, with the exception of Italy, have allocations to at least 50.400MHz. Why do operators insist in cramming all the narrow band activity within 20kHz of 50.110MHz?

Right, I'm off the soap box and we'll get back to the DX.

During the evening of January 2, from 1815UTC, there was a 30 minute opening into Iceland via Sp-E, with the TF3SIX beacon being heard in southern England. There is very little activity from Iceland with only three stations, TF3EJ, TF3SA and TF4LB, having 50MHz capability, (TF6MM is nownot active having sold his equipment to TF4LB).

The band was also open, via Sp-E, to YO2IS and 9H1 on January 9, OZ and SM on January 13, to CT, DL, I and OE on January 15-16 and OZ on January 22.

The series of flare activity during the fourth week of January gave rise to a number of weak auroras. On January 25, **Tim Hugill G4FJK** (AVN) heard GB3RMK (50.060MHz) go auroral at 1850UTC. The only station noted was GM0GEI, peaking 55A, on a beam heading of 20°.

Altogether, January was a very interesting month, especially if you had many hours of spare time on your hands! Those of you with a nine-to-five job will have seen little of the DX, and therefore might have thought that the band wasn't worth bothering with. In reality, as I have already recorded, 50MHz was open to four continents and in excess of 30 countries.

#### The 70MHz Band

On 70MHz, the series of cumulative contests, commencing on January 27, brought an increase to band activity, albeit for two hours on a Sunday morning. An aurora, on January 25, unfortunately went unnoticed by the majority of UK operators. This was a pity, as it is normally during such openings that fixed stations in England can work into Ireland or Scotland.

At my QTH in Herefordshire, I made 37 QSOs during the cumulative contest on January 27. Contacts on s.s.b. included GI4SJB/P (I074), GW6TEO (I071), G8ESB (YSN), G0EHV (TWR) and G3YJX (CNL).

**Derek Poulter G3WHK** (LDN) is back on the band after a period of inactivity. Equipment in use consists of an Icom IC-575A h.f. transceiver driving, at 28MHz, an RN Electronics transverter. This produces 10W p.e.p. output which is fed into a BNOS Electronics 100W amplifier. The antenna system set-up comprises of a 4-element Yagi mounted on top of a 2-section Versatower at 15m above ground.

Bob Reeves G8VOI (HPH) is now active on the band. He is using a Microwave Modules transverter driving a 50W MM linear. Although he is using a loft mounted dipole, the QTH at 50m a.s.l. has a reasonable take-off, allowing contacts to be made well up country.

A station with a more ambitious antenna is **Tony Ashcombe G4APA** (CHS). He is using two stacked 8-element Yaqis to great effect.

**Neil Underwood G4LDR** (WLT) is building the *PW* Meon transverter and hopes to be active on the band soon.

#### The 144MHz Band

Up on 144MHz, Tropo conditions were enhanced at times during January, allowing many UK operators to work into central Europe.

Dave Brown GD4XTT (IOM) noticed that conditions were quite good between January 23-27. Time was very limited during this period, QSOs being made with PA3EPA (JO21) on January 23, DL3ELB (JO31) heard on the 25th and F6FNL (JN03), 57 bothways on January 27. During 1990, Dave managed to work 75 counties and 20 countries on 144MHz and 31 counties and 9 countries on the 430MHz band.

At my QTH, propagation was good into Germany during the evening of January 28, allowing me to make s.s.b. contacts with DB8KJ and DC6KI, both in JO30.

Graham Peyman GOKDN (DOR) reports that following an early morning m.s. schedule with SP9EWU on December 23, he tuned around the f.m. section of the band and was delighted to hear U2MIR working simplex on 145.550MHz. The signals exhibited much QSB, possibly because of the orientation of the MIR space station. He tried calling with a Russian phrase which means "Hello and thank you for the call" but no reply was heard. However, a few hours later GOLAJ telephoned Graham with the news that he had been listening on the frequency and had heard the cosmonauts calling GOKON back in Russian! Unfortunately Graham didn't hear any of this and hasn't heard them since. Perhaps you should all practice a few Russian phrases as it might get you that elusive QSO! If you don't want to attempt a telephony QSO you could try via packet radio. It is possible to connect to the U2MIR personal mailbox. Patrick O'Brien GW1SXN (GDD) reports that he heard U2MIR, on February 4 at 1140UTC and 1457UTC, as the space station passed overhead. A number of stations, including DC6SN, EA2ARU, EI3FI, F6EXK, G4JY, I0LYL and OZ8DF, were all trying to connect to the on-board p.m.s.

#### **Meteor Scatter**

Graham GOKON is a newcomer to m.s. operation and has provided details of his first experiences using the mode. He was initially persuaded by a local station GBPYP, to try m.s. and so, armed with 80W and a 16-element Yagi, he went looking for the DX. He made two s.s.b. schedules on the 14.345MHz v.h.f. net and was very excited to work, on December 13, SM6KJX (J067) and YU3ES (JN65). That was it. The bug had bitten! Reading that c.w. was much easier and more productive, Graham modified a tape recorder, bought a keyer and built an audio up-converter, all within the space of one week.

The up-converter, incidentally, works by mixing the received Morse audio beat with a fixed audio frequency of typically 9kHz to produce a new audio frequency somewhere around 12kHz. This is then fed to the tape recorder. When the tape is subsequently slowed down, for decoding purposes, the received pitch is easier to copy. Without an up-converter, the tape pitch, when slowed down, may only be 50-200Hz, which is not so easy to copy. Having set up the station for c.w. operation, Graham took more schedules on the v.h.f. net. Successful contacts during the latter part of December included DL7ARM (J062). EA3KU (JN00), OE3JPC (JN88), OE3UP (JN87), SP6GZZ (JO81) and SP9EWU (JO90). The Quadrantids shower was eagerly awaited, especially as a new 180W amplifier had been obtained. Contacts were made, on January 3, with HG8CE (KN06), SP6BTI (J081) and Y27BL (J061) and on the 4th with IK1LGV (JN44).

With the exception of the Quadrantids shower, the conditions for meteor scatter during the first quarter of the year are normally poor. No other usable showers exist and the sporadic meteor rate is very poor, being at a yearly low in February. However, Graham was pleased to report c.w. contacts with IKOBZY (JN61) on January 11, GM4IPK (IO99) on January 23 and SM0KAK in early February. The only penalty awarded for becoming a "pingiockey" is the ridiculous hours you have to get up in the morning. The advantage is that you can work daily DX on 144MHz, at distances of typically 1200-1800km, even at times outside of the recognised shower

periods Clive O'Hennessy GW4VVX (GWT) is also a new convert to meteor scatter operation. He will soon be active on c.w. having obtained a Supa-Keya and made the necessary modifications to a cassette recorder for variable speed playback. Before he got the Morse system installed, Clive tried his hand, at some s.s.b. tests during the Quadrantids shower. His first schedule with HB9SUL (JN46) produced only a few short pings and similar results were obtained during the next test with GM0JOL (1078), only one ping being heard in 30 minutes. Not a very encouraging start. He tried two more schedules. between 1300-1500UTC, and was pleased to work DJ3VI (J051) and SP3MFI (J091). Clive mentions that these tests showed that the east-west path was much better

#### **QTH Locator Squares Table**

Station	50	70	144	430	1296	Total	
G3IMV	319	-	447	125	51	942	
GJ4ICD G4ASR	428 279	43	264 350	119 41	59 3	870 716	
G6HKM	270 309	8	224 184	112 104	48 38	654 643	
G1KDF G3JXN	204	22	187	134	88	635	
EI5FK ON1CAK	314 207	-	187 280	58 53	11	559 551	
GODAZ	146	-	221	137	39	543	
G6HCV G3UVR	309	50	233 257	140	83	542 530	
G4KUX ON1CDQ	168	-	372 256	120 55	10	492 489	
G1SWH	201	30	166	62	9	468	
G4RGK G3XDY	=	=	284 211	124 150	50 92	458 453	
G4MUT G00FE	143 264	25	155 152	94	34	451 416	
G0EVT	142		213	57	40	412	
GOLBK G4DEZ	55	_	267 249	89 49	46 49	402 402	
G8ATK G1LSB	103 73	_	145 176	94 144	52	394 393	
G6DER	-	22	183	110	78	393	
G8LHT G1EZF	79	19	185 263	93 93	14	390 388	
G4XEN G8PYP	206	2	274 120	111 34	_	385 356	
G4NBS G4RRA		35	138 255	108 80	67	348	
G3C0J	_	=	186	103	44	335 333	
G8PNN G4SSD	7	25	129 229	99	64	324 322	
G4FRE GM0HBK	132	8	102	146 19	72	320	
G4TIF	-	-	156 200	110	_	315 310	
G4DHF G4ZTR	78	28	307 120	50	30	307 306	
G1EGC G8HHI	-		198 148	80 110	23 38	302 296	
G6MGL	_	-	141	89	59	289	
GM4CXP DL8FBD	50		201 280	32	_	283 280	
G1SMD G0FYD	167 110	1	110 160	6		277 277	
G6MXL	75	23	99	51	23	271	
G4YTL GW6VZW	118		269 143	6		269 267	
G4PCS G3BDQ	256		258	3		261 256	
G1GEY	200		168	77	11	256	
G3NAQ G6DZH			175 158	80 87		255 245	
G6STI G0NFH	113	25	152 78	69 18	24 9	245 243	
G3FPK G4IGD			241 238			241 238	
GOEHV	=	_	160	75	_	235	
GW4FRX GM4CXP	=	_	231 198	31	_	231 229	
G1SMD G4DOL	165	_	110 216	_	_	275 216	
G4MEJ	_	_	213	_	_	213	
G8LFB G8MKD	_		209 150	49	_	209 199	
GJ6TMM G4YCD	$\equiv 3$		151 197	48		199 197	
G1TCH	94	_	95	6	_	195	
GI1JUS G8XIR	_	_	192 123	_	62	192 185	
G7ENF G4FVK	59		89 82	24 50	23	172 155	
G7ANV G4AGQ			153 104	42	50.5	153 147	
G8XTJ	29	_	116	-	1	145	
G6MEN GW4VVX	41 10	2	63 120	26	4	136 130	
G1WPF G0FEH	_	_	97 101	29 24	_	126 125	
GOISW	45	_	59	17		121	
GW6ARL GW1MVL	116	_	109	7	_	116 116	
G1IMM GM0GDL	=	_	98 88	17 23	-	115 111	
GOKON		1	104	2.0		104	
G7CFK G1CEI	109 11		77	18		109 106	
GI40WA G7CLY		_	103 100	2	=	103 102	
G1SWH	-	-	148	53	-	101	
GM0J0L GM1ZVJ	35		88 48	3 = 1		88 83	
G4WHZ G0GTF	 76	_	76		7	83 76	
GINVB	-		73			73	
GOHDZ GOHEE		_	64 73	_	_	64 73	
GU4HUY G2DHV	_	_	73 33	7	2	73 42	
G7AHQ GW7EVG	_	_	34 22		_	34 22	
						22	
No satellite or repeater QSOs Starting date January 1 1975							

## **COMMUNICATION CENTRE** OF THE NORTH

The largest range of communications equipment available in the North. Full range of receivers, transceivers, antennas, power supplies, meters. Ali tubing - wall brackets - rotators - insulators.

## **FULL KENWOOD RANGE IN STOCK**

	BUTTERNUT	
	HF2V 40-80M vertical£142.00	
	20MRK 20M add on kit	ĺ
	HF6VX 6 band vertical£167.00	l
	TBR160S 160M add on kit	ĺ
	HF5B Triband Mini Beam£235.00	i
	NEW R5 5 Band Vertical£259.00	i
	CUSHCRAFT	ĺ
	A3 3 element Triband£329.00	ı
	A4 4 element Triband£353.00	ı
	10-3CD 3 element 10m£115.00	ı
	15-3CD 3 element 15m£139.75	ı
	20-3C2 3 element 20m£238.00	ı
1	AP8 8 band 25ft vertical£181.00	ı
İ	AV5 5 band 25ft vertical£123.00	ı
	R5 5 Band vertical Antenna£259.00	ı
1	15 element 2 Boomer	ı
	ANTENNA TUNERS	ı
	Kenwood AT230£208.00	ı
١	MFJ 962B 1.5kW Tuner£241.00	ı
ı	MFJ 949C 300W Versatuner£157.00	ł
ı	MFJ 941D watt Basic£105.00	l
	MFJ 1601 Random Wire Tuner£42.02	l
1	Kenwood AT250 Automatic Tuner£366.00	l
	TEN TEC "254" 200 Watt Antenna Tuner	ı
	ET-1 300 Watt Antenna Tuner	ı
	A FULL RANGE OF RECEIVERS FOR AIR-BA	
1	WI OFF INMERT OF HEREIAFUS LOU VIII-DV	١

MANGE IN STOCK.
SCANNING RECEIVER RANGE
AR300 Base Station
AR2002 Base Station
AR950 Base Station
AR900 Hand-Held£199.00
AR800 Hand-Held
RS37S Airband Hand Held£69.50
ICOM R7000 Base Station
R535 Airband Base Station£235.00
WIN 108 Hand-Held Airband£175.00
AR1000 Hand-Held
SWR/POWER METERS
MFJ815 HF 2kW SWR/PWR
SX200 1.8-200MHz£65.00
SX400 140-525MHz£79.00
W510 1.6-30MHz£79.00
DIAWA CN410M 35-150MHz£61.72
DIAWA CN460M 140-450MHz£65.40
NS660P 1.8-150MHz + PEP£115.00
KOYD-100 1.8-60MHz
KOYD-200 1.B-200MHz£60.00
KOYO-400 140-525MHz£62.00
OUMMY LOAOS
MFT300 Watt D. load£33.50
TenTec 300 Watt Dummy Load
L20 20 Watt Dummy Load
HF225 GENERAL COVERAGE RECEIVER

#### ND - MARINE - SHORT WAVE - AVAILABLE

G5RV full size £18.50 half size £16.00. Full range of Antenna - NEW HIGH POWER GSRV ANTENNA £32.00 Accessories plus full range or VHF - UHF - HF mobile ant

Full range of RSGB and ARRL pulications in stock. Part Exchanges welcome. Sencond hand lists daily.
Send S.A.E. for details of any equipment.
HP terms. Access/Barclaycard facilities.
Open 6 days a week. 24 Hour Mail Order Service.
Goods normally despatched by return of post.
POSTAGE-CARRIAGE EXTRA AT COST.


**FULL TEN-TEC RANGE NOW AVAILABLE** 

> "Paragon", "Corsair", "Omni V" plus all accessories

Phone 0942-676790.

## STEPHENS JAMES LTD.

47 WARRINGTON ROAD. LEIGH, LANCS, WN7 3EA

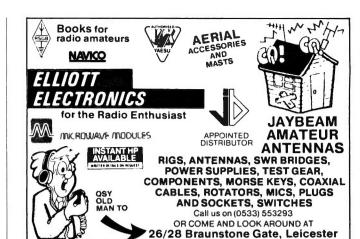

## ORP TX/RX

## COMPLETE TO THE LAST NUT!

- **★ 2W CW OUTPUT**
- ★ 7.0-7.1MHz
- ★ STABLE VFO
- **★** SIDETONE
- ★ RIT
- **AUDIO FILTER**

★ CASE AND ALL HARDWARE INCLUDED ★

DTR7 - KIT £84.50 READY BUILT £135.00 Send SAE for Brochure or call Alan, G4DVW on 0602 382509



## LAKE ELECTRONICS

7 MIDDLETON CLOSE, NUTHALL, NOTTINGHAM NG16 1BX (callers by appointment only)



.. £20 or two for £30

# SG-230 *IARTUNER*

HF ANTENNA COUPLER SSB, AM, CW & DATA **FAST - INTELLIGENT - ACCURATE** OPERATES WITH ANY HF TRANSCEIVER

The Smartuner high technology coupler intelligently tunes any length antenna (8 to 80ft) in the HF band. The unit will operate with any HF transceiver within its specifications. The Smartuner switches 64 input and 32 output capacitance combinations plus 256 inductance combinations in a "pi" network resulting in over a half-million different ways to ensure a perfect match for the transceiver; and, it remembers the frequency and the tuning values and will re-select these values in less than 10 ms next time you transmit on that frequency.



Includes shipping to U.K.

- MICROPROCESSOR CONTROLLED
   1.8 TO 30 MHz RANGE
- NON-VOLATILE MEMORY WATERPROOF
- 10 TO 150W INPUT POWER
- 10ms RETUNING TIME

Visa and Mastercard/Access Accepted

DEALER ENQUIRIES ARE WELCOME

DELIVERY FROM STOCK

SGC Inc. SGC Building, 13737 S.E. 26th St. Bellevue, WA. 98005 USA P.O.Box 3526, 98009. Telex: 328834. Fax: (206) 746-6384 Tel: (206) 746-6310

#### CLARK SCAM HEAVY DUTY 40' TELESCOPIC PNEUMATIC MASTS

Retracted 7'8" Head load 40lbs with or without supporting legs + erection kit in bag + handbook .£200 - £500

CLARK SCAM HEAVY DUTY 70'TELES COPIC PNEUMATIC MASTS Retracted

13'5" Head load 90lbs with or without legs + erecting kit + handbook TEXSCAN CATV SET TOP CONVERTOR Tuner FX range 54MHz - 450MHz-450MHz output on channel 48 UHF-PAL-Synthesiser controlled - keypad or IR remote controller brand new

& boxed with circuits & information. Not tested. ..

available - Brand new with book.....

RACAL MA4204 ENCRYPTION UNIT (Speech or data security scrambling) for use with HF-VHF or field telephone equipment. Soild state. Alloy air sealed case - 12V DC supply - each unit can send or receive - but two must be used one to receive the other for sending both switched to the same number selectable from rotary switches on the front panel 512 operating codes

....£150 or two for £275or four for £500 RACAL MA4230 - MA4231 AUTOMATIC MORSE RECEIVING AND SENDING SYSTEM. MA4230 AUTOMATIC MORSE SENDER - Small solid

state unit incorporates a full alphanumaric keyboard for entering messages which can be sent immediately or stored for 30 days. Output is in Morse code 10 to 20 wpm or 8 to 16 times this speed. Internal storage of up to 1000 characters etc., contained in small alloy airtight case with book. Brand new. MA4231 AUTOMATIC MORSE READER Self contained - receives Morse code from above unit or radio audio output at up to 160 words per minute, by hand or automatic - stores up to 912 characters - readout on unit - letter by letter - -LED display or printer VDU etc., many adjustable speeds ASC11 or Baudot. Power 11-30V DC or AC mains by MA4232 power unit with 

AS ABOVE BUT ARABIC NOT ENGLISH But supplied with kit to convert to English w keyboard cover + proms + book. Line adaptor - Brand new

MARCONI TF2008 SIGNAL GENERATORS 10KC/S TO 510MC/S AM/FM or sweep output. Complete with book. Not tested - as they come from the pile - will have small faults - as received MOD hence clearance price. £250 each. Front panel protected with metal cover therefore fair condition. Wooden kit box of leads etc.

ARMY TYPE MORSE KEYS Large quantity available. ....... ARMY WHIP AERIALS AND BASE 12' or 18' - NEW ......

Small selection only listed. Export trade & quantity discounts price is Ex-works. SAE all enquiries. Phone for appointment or for demonstration of any item, availability or price change. VAT and carriage extra.

## **JOHNS RADIO**

Government and manufacturers surplus Electronic items. Stabilized power units and Telecommunication Equipment

84 Whitehall Road East, Birkenshaw, Bradford BD11 2ER Tel No: (0274) 684007 Fax No: (0274) 651160



than the north-south path.

As constructive criticism, I would say that some of these schedules were with stations located too close for effective working. With an average antenna system, let's say, a single long Yagi at 12m above ground, the best results will be somewhere in the range 1400-1800km. Surprisingly therefore, it is better to make schedules with stations towards the extremities of Europe, such as LA, SM, SP, OK, HG, YU and I, rather than the likes of DL, HB and OZ who are all located much nearer to the UK. I'm not saying you can't work stations via m s in these countries. I'm only saving it's just more effective to choose schedules with stations within your optimum range. Another very important point to note, is that unlike sporadic meteors, shower meteors follow a specific path through the sky. Therefore, optimum propagation in a certain direction can only be made at specific times. For example, the best times to make schedules during the Quadrantids shower, with someone located to the south of the UK, would be around 0400UTC and 1300UTC. In the April Lyrids, the same DX station would be scheduled around 0000UTC or 0800UTC. Again, I'm not saving you can't make QSOs at the 'wrong' time, but why make things difficult for yourself?

#### **VHF News**

The RSGB's National VHF Convention, is being held, as usual, at Sandown Park Racecourse, Surrey on Sunday 24 March, the doors opening at 1030. In addition to the trade exhibition, specialist groups and equipment test facility, a full lecture programme has been arranged. Subjects include, e.m.e. by G3LTF, v.h.f. DX by G3SEK, 10GHz equipment by G3WDG, 1.3GHz antennas by G3GRO and repeater linking by G4NJU. Further details can be obtained from Geoff Stone G3FZL on 081-

Commencing on Sunday April 7, the RSGB News Broadcast GB2RS, will be transmitted on 50MHz, simultaneously with the 144MHz broadcasts. It is expected that 30 news-readers located in G, GI, GJ, GM, GU will be given permission to operate on 51.530MHz f.m. using horizontal polarisation. I would be interested to hear what results you obtain when listening to these transmissions. I suspect that most Yagis in use in the UK run out of gain at these elevated frequencies!

It is hoped that an expedition will take place in early June to the Minquies Reef, located 15km south of Jersey (IN88). Operation will take place on a number of bands, including 50 and 70MHz. The reef counts for the Islands On The Air award (IOTA) and has never been activated before. Further details can be obtained from G.I4ICD

Clive GW4VVX, reports that all QSL cards for his GB2XS expedition in 1990 have now been sent to the bureau. If you have not received your card yet, he would be only too happy to provide a duplicate. If you missed Clive last year, you can catch him again, operating as GB2XS from IO78, between August 10-24.

#### **QRZ Contest!**

The RSGB 50MHz Trophy contest will be held on Sunday April 7 between 1000-1800UTC. The contest has sections for fixed station single operator, fixed station multi-operator and portable stations. County and country multipliers will be used.

The last of a series of five 70MHz cumulative contests will be held on March 24, between 0900-1100UTC. The contest exchange must include locator, QTH, report and serial number.

Another 70MHz contest, a fixed station event, will be held on Sunday March 31 hetween 0900-1500UTC

The German 430MHz c.w. contest, AGCW-DL, will be held between 1900-2300UTC on Saturday March 16. Further details were given in the March issue of

The first 1.3GHz fixed station contest of 1991 will be held between 1600-2200UTC on Sunday April 14. Both single or multi-operator stations may enter.

An RSGB microwave cumulative contest, for all bands from 3.4GHz upwards, will be held on March 31, between 0900-2100UTC.

Scandinavian activity contests will be held on the following dates. 50MHz activity on March 26 and April 23, 144MHz on April 2, 430MHz on April 9 and Microwaves on March 19 and April 16. All band sections run between 1700-2100UTC. You can obtain a full set of rules by sending me a stamped addressed envelope.

## Deadlines

Please send your letters to reach me by the end of the month. I normally write up the column in the first few days of the following month. Don't forget that I can also receive messages via packet radio at my mailbox GB7TCM.

Photographs of your shack, antennas or any v.h.f. activity are especially welcome. Other pictorial items such as QSL cards, awards, certificates, etc., are also required.

K1JRW: R.Robinson. 136 Pelham Hill Road, Shutesbury, MA 01072, USA. KP2A: J.Ackley. Box 10245, Charlotte Amalie, Virgin Island, 00820. PZ1AP: Arnold Polsbroek. POB 566, Paramaribo, Suriname, S. America. TR8CA: Via F6CBC. J.Charron, 183 Ave Carnot, F-33150 Cenon, France. TU2EW: Daniel Biau. Box 1890, Abidjan 11, Ivory Coast, West Africa. 3X1SG: Via ON6BV. V. Ravyts, Freest 4, B-1590, Bever, BT, Belgium. 6W1QC: Toshihiko Kiya. 2-21-13 Hokuei, Chitose, Hokkaido 066, Japan. 9L1US: Via K.Scheper. 5875 Cedaridge Dr., Cincinnati, OH 45247, USA.

As I write this, the Gulf war is in its twenty-fifth day, and it seems that the Coalition forces have control of the air waves as well as air superiority. Iraqi radio seems to be reduced to very little output, with its external services untraced for a couple of weeks. Their broadcasts were jammed by the Allies for a while, with a 'wobble' jammer evident on some channels. With little on the air from Baghdad, the jammers have stopped. A new station calling itself 'Mother of Battles' radio was noted in Arabic during late January and early February, but this fell silent on February 4.

Currently, it seems that only the Iraqi domestic services are heard, traced on 3.98MHz in parallel with 8.35MHz. Both of these are audible from time-to-time in the UK, but the 3MHz frequency is occupied by the Voice of America from 1700GMT.

A number of other broadcasters are continuing to react to the developments, adding transmissions to serve forces, expatriates and the local population in the Gulf. Indeed, changes to the output of BBC World Service mean that Britain now has the highest number of hours transmitted overseas since 1947. The figure is currently 823 and a half hours a week.

The Foreign and Commonwealth Office, which funds World Service, has agreed to release in excess of £4 million to meet the

## **Broadcast Round-up**

Reports to Peter Shore via the PW Editorial Office

additional costs of covering the Gulf War. Pictures flashed around the world on the day war broke out showed listeners in the Gulf region holding short wave receivers to their ears, listening to London in English and Arabic, proving the BBC's worth in times of crisis

In the Baltic states, there has been much action on the broadcasting front. Soviet Interior Ministry troops stormed the radio building in Vilnius on January 12, forcing it off the air. Dramatic appeals for assistance were heard in English and Lithuanian. Relays of the station, usually carried on transmitters in other parts of the Soviet Union for listeners overseas, were stopped for a week or so, but negotiation with the Soviet State Radio system proved fruitful, and Vilnius was once again heard here and around the world with very good reception

Radio Moscow's output is somewhat

strange. I came across an unusual programme on Sunday 10 February at around 1240 on the English World Service. Itwas called Vasily's Weekendand seemed to consist of pop music introduced by Vasily Strelnikov from somewhere he called the 'Radio Moscow Hotel', and by a contributor with what seemed to be a genuine American accent in Chicago!


The programme interviewed 'guests' at the hotel, including Vasily's sister, and waxed lyrical about the wonderful world of international radio, and sang the praises of Jonathan Marks' Media Networkon Radio Netherlands. I suspect that this programme could be a regular one, and it might be worth tuning in to Radio Moscow on Sunday lunchtimes at 1230GMT

However, Radio Moscow news bulletins did not mention the independence vote in Lithuania on Sunday 10 February, although The Independent newspaper

reported that domestic services did report the vote without comment. It never ceases to amaze me how the Soviet media functions. Looking at another example, the fledgling radio service of the Russian Federation, Radio Russia, is in dispute with the authorities about its transmissions. The service was broadcast on the popular Mayak service when it first started, but has now been relegated to the All Union Radio Second Programme, reaching only about 50% of the Russian Federation's population. The service is broadcast on short wave (frequencies in the European section) and I wonder how long it will be before the service inaugurates English programming.

Radio Sweden is reacting to the Baltic states crisis by expanding its output in the Baltic languages. Lithuanian is now being added to the successful Estonian and Latvian broadcasts which have now doubled. The services can be heard on 1.179MHz

Adventist World Radio has applied to the Italian government to build a new highpowered short wave transmitting station some fifty kilometres east of Bologna. The station proposes to install two 100kW and two 250kW senders. The site will have eight antennas, serving northern and eastern Europe, the Soviet Union, southern Asia, the Middle East and North Africa.

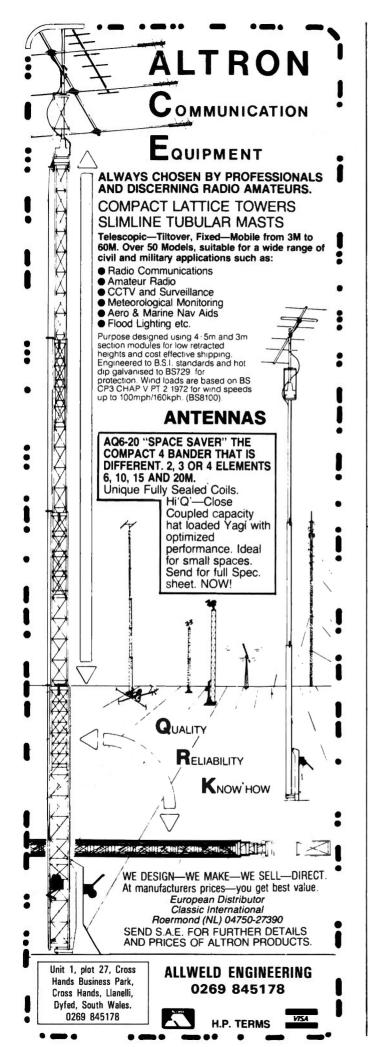

## S.E.M.

UNIT P, UNION MILLS, ISLE OF MAN Telephone: (0624) 851277

S.E.M. Q.R.M. ELIMINATOR MKII. This device can phase out completely local interference of any kind. Connects in your aerial feeder and covers 100kHz to 60MHz, you can transmit through it. £89.50 incl. Ex-stock. HI Q RECEIVER AERIAL MATCHING UNIT. Provides a high selectivity impedance match for wire or co-ax aerials to your receiver £65 incl. Ex-stock.

S.E.M. TRANZMATCH MKIII. The only Aerial Matcher with UN-BALANCED and TRUE BALANCED OUTPUTS. 1kW 1.8-30MHz. £155.00. Bult-in EZITUNE (see below). £49.50, Bult-in Dummy Load. £9.90.

Built-in EZITUNE, (see below), £49.50, Built-in Dummy Load, £9.90.

EZITUNE, Allows you to TUNE UP on receive instead of transmit. FANTAS-TIC CONVENIENCE. Stops ORM. Boxed unit, £55. P.C.B. and fitting instructions to fit in any ATU, £49.50.

FREQUENCY CONVERTERS. V.H.F. to H.F. gives you 118 to 146MHz on your H.F. receiver. Tune Rx. 2-30MHz. £75 ex-stock.

H.F. to V.H.F. gives you 100kHz to 60MHz on your V.H.F. scanner. £65 ex-stock. Plug in aerial lead of any receiver. Tuning from 100MHz up.

2 or 6-METRE TRANSMATCH. 1kW. will match anything, G2DYM or G5RV: on VHF. £45.00 ex-stock.

DUMMY LOAD. 100W THROUGH/LOAD switch. £32.00 ex-stock.

VERY WIDE BAND PRE-AMPLIFIERS. 3-500MHz. Excellent performance. 1.5dB Noise figure. Bomb proof overload figures. £42.00 or straight through when OFF. £47.00 ex-stock.

through when OFF. £47.00 ex-stock. **R.F. NOISE BRIDGE.** 1-170MHz. Very useful for aerial work measures resonant freq. and impedance. £55 ex-stock. **IAMBIC MORSE KEYER.** 8-50 w.p.m. auto squeeze keyer. Ex-stock. Ours is the easiest to use. £55. First class twin paddle key, £32 ex-stock. **TWO-METRE LINEAR/PRE-AMP.** Sentinel 40:14 × power gain, e.g. 3W – 40W (ideal FT290 and Handhelds). £115.00. Sentinel 60: 6 × power, e.g. 10W in. 60W out. £125.00.

H.F. ABSORPTION WAVEMETER, 1.5-30MHz, £45.00 ex-stock. MULTIFILTER. The most versatile audio filter. BANDPASS Hi Pass, Lo Pass and two notches, \$88.00 ex-stock.

HIGH PASS FILTER/BRAID BREAKER. Cures T.V.I., £7.95 ex-stock. CO-AX SWITCH. Three-way + earth position. D.C.-150MHz. 1kW. £35.00

#### 12 MONTHS COMPLETE GUARANTEE INCLUDING TRANSISTORS

Prices include VAT and delivery. C.W.O. or phone your CREDIT CARD NO. Ring or write for further data or catalogue. Orders or information requests can be put on our Ansaphone at cheap rate times.

## SPECTRUM COMMUNICATIONS

KITS AND READY BUILT PRODUCTS Individually hand crafted products and qualified technical support

TRANSVERTERS for 10mW-500mW 10 metre drive. Clean 500mW output, low noise and 15dB gain Rx side. Types TRC2-10, TRC4-10, TRC6-10, PCB KIT £55.50. PCB BUILT £83. BOXED KIT £72, BUILT £110.50. Repeater shift TRC2-10r add £7.50 to kit or £10 to built

TRANSVERTERS for <1mW 10 metre drive. Buffered versions of above types TRC2-10B, TRC4-10B, TRC6-10B. PCB KIT £64.25, PCB BUILT £94. BOXED KIT £80.75, BUILT £127.

TRANSVERTERS for 500mW-5W 2 metre drive. Includes an interface for RF sensed switching and attenuation. Types TRC4-2i (built only), and TRC6-10i. Prices as buffered versions above.

LINEAR AMPLIFIERS 500mW in 25W out switched, suit transverters above. Types TA2S2, TA4S2, TA6S2. BOXED KIT £66, BUILT £81.50. LINEAR AMPLIFIERS 500mW in 25W out unswitched, suit MEON or similar transverters. Types TA2U2, TA4U2, TA6U2. BOXED KIT £52.75, BUILT £68.


LINEAR AMPLIFIERS 2.5W in 25W out switched, suit FT290 and FT690. Types TA2S1, TA6S1. BOXED KIT £48.50, BUILT £62.

RECEIVE PREAMPS low noise, 20dB gain adjustable, 100W handling. Types RP2S, RP4S, RP6S, RP10S. BOXED KIT £27.50, BUILT £39. Masthead versions RP6SM, RP2SM, BOXED KIT £46.50, BUILT £59. RECEIVE CONVERTERS add 2, or 4, or 6 metres to receiver tuning 28-30MHz, low noise, 26dB gain. Types RC2-10, RC4-10, RC6-10. Or add 4, or 6, or 10 metres receive to a 2 metre transceiver, low noise, 15dB gain. Types RC4-2, RC6-2, RC10-2. PCB KIT £19.50, PCB BUILT £28.50, BOXED KIT £33.75, BUILT £46.50.

REPEATER TONEBURST 1750Hz auto-toneburst type AT1750, PCB KIT £5. BUILT £7

10 METRE CONVERSION BOARD for UK81 CB's with LC137 or TC9119P PLL's, SC29 board with fitting instructions £20, state rig type when ordering. We can do the work for £38.50 inc. rig carriage.

PLUS MANY OTHER KITS AND 10 METRE CONVERSIONS AND COMPONENTS



Unit 4, Grove Trading Estate, Dorchester, Dorset. Tel 0305 262250 Shop times: 9-1 2-5 Tues-Fri, 9-1 Sat. Closed Sun & Mon.

# Back-Scatter

With so much going on in the world at present, it doesn't pay to be away from the short wave dial for any length of time. Even in the car it's possible to stay in touch. I'm using a Grundig car radio at the present, which includes m.w., l.w., v.h.f.-f.m. (including RDS) and the 6, 7 and 9MHz short wave bands. These include out-ofband channels, so the receiver is quite flexible. Whilst I miss the higher frequency bands, and some of the more distant broadcasters such as Radio Australia, the set is useful for listening to BBC World Service, the Voice of America, Switzerland, Holland and so forth. And it's nice to know that I'm never completely cut off from the world of international radio. Look out for a comprehensive test of the Grundig car radio, together with another German receiver, a Blaupunkt, in Short Wave Magazine later this year.

## European Stations All times UTC(=GMT)

If you have been wondering as to the whereabouts of Radio Austria's Austrian Short Wave Panorama presented by David Hermges, it has been dropped for extended Gulf coverage. Whether it returns might be down to listeners' reaction. If you miss it, drop the station a line.


The British Forces Broadcasting Service (BFBS) has a feeder from Cyprus to the Gulf on 6.84MHz upper side band (u.s.b.) noted during the evening period.

The Red Cross Broadcasting Service, via Swiss Radio International transmitters, has added an extra programme on the second Sunday of the month at 1100 on 7.21MHz, with a repeat on the following Monday at 1700, also on 7.21MHz. The last Sunday of the month broadcast continues as normal.

Radio Russia from the Russian Federation can be heard 1000 until 1400 and 1900 to 2100 on 15.75, 15.63, 11.99, 11.83 and 9.585MHz amongstothers. These are channels used by All Union Radio's Second Programme.

A reminder of the Radio Vilnius frequencies at 2300 via Sovieth.f. facilities:

9.75, 15.18, 17.69 and 17.72MHz. The Lithuanian transmitter on 9.71MHz proves to be inaudible at present. The station's DX programme has reported that the first home service from Vilnius is on the air 24 hours a day on 9.71MHz, from 0400 until 1700 on 6.01 and 1700 to 2300 on 9.675. The FAX

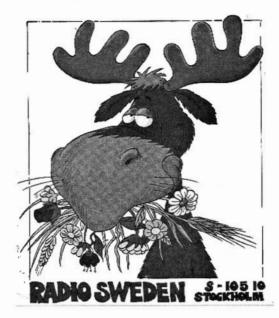

number for reception reports to Radio Vilnius is area code 0122, 22 15 71.

Some feeder news. A feed from Munich to Portugal has been noted on 10.86MHz carrying the Voice of America on one sideband, and Radios Free Europe and Liberty on the other. AFRTS is fed from the UK, presumably to the Gulf. on 9.023 u.s.b.

## African and Middle Eastern Stations

The Voice of the UAE in Abu Dhabi seems to have replaced the evening English programme with Arabic. It is scheduled for 2200 until 2400 on 15.10, 9.60 and 6.17MHz with a frequency change at 2300 when 15.10 is replaced by 13.605MHz.

Israel Radio has offered some dramatic listening since the Gulf War started. English language broadcasts, which generally relay the English domestic service, have been interrupted by air raid warnings and instructions to the population on what action to take. Broadcasts at 2230, 0100, 0200 and 0500 are carried on 11.605, 9.435 and 7.465MHz. At 1100 try 21.79, 17.575 and 11.585MHz whilst at 1815 there are two channels, 11.585 and 11.655MHz.

Israel's Arabic transmissions have been jammed recently. At 1700, a 'wobble' jammer has appeared on the 15.10MHz frequency.

English from Saudi Arabia at 1600 until

2100, which is scheduled to use 9.705 and 9.72MHz has been untraced on both frequencies for some time.

The frequency usage of Syria's Radio Damascus has settled down and the station's English programmes in the European evening are now at:

2005 on 15.095 and 12.085MHz 2110 on 12.085 and 9.95MHz

#### **Asia and the Pacific**

Radio Australia has inaugurated a special programme for forces serving in the Gulf with messages telephoned in by relatives and friends. It's called *Gulf Links* and is transmitted at 1430 for one hour daily on 21.775 and 25.75MHz, of which the higher channel offers best reception in morthern Europe. The programme is modelled on the highly successful BBC World Service *Gulf Link* programme which brought news from home to hostages in Kuwait and Iraq in the months before Christmas 1990.

The new Radio Japan relay station in Sri Lanka has been inaugurated, and the schedule is:

0100-0200 on 11.84MHz to South Asia 1400-1500 on 9.535MHz to South Asia 1600-1700 on 15.21MHz to Middle East and North Africa

Japanese to the Middle East and North

Africa is transmitted at 0400 on 17.82MHz and at 1700 on 15.21MHz. All transmissions from the site in Ekala are from 300kW senders.

#### North, Central and South America

Radio Canada International has added extra frequencies for its services to the Middle East, with English at 0400 now using additional 9.555MHz from Deutsche Welle transmitters in Europe.

Meanwhile some frequencies for European, Latin American and African services have been discontinued. The Eastern Europe service at 1515 has lost 13.65 and 15.315MHz, and at 1715, the same frequency of 13.65MHz has been lost

At 1800 the African service loses 13.67 and the 0200 Latin American service during the week, and weekends at 0100 has lost 13.72MHz.

Ways are still being looked at to guarantee the continuation of Radio Canada International. The Department of External Affairs seems to be the most likely candidate to provide the Can\$20 million required to run the service. A decision is likely during March.

HCJB reports from Quito, Ecuador that its s.s.b. transmissions have been highly successful. John Beck, the station's frequency director, says that results have far exceeded expectations from the Siemens 30kW s.s.b. sender with variable carrier insertion. The 11m band operation uses a vertical antenna, whilst the 13m band unit uses an unterminated bidirectional rhombic directed towards Europe and the South Pacific. A reminder of the frequencies, 21.455 or 25.95MHz. Some programme highlights from the station include a special edition of the Monday Dateline 90 on April 1, which will include a simulated live report of the Easter events of the first century with interviews with Peter, Mary and a host of others involved at the time.

The DX Partyline programme, aired on Saturdays, will look at broadcasting in Ghana on March 9, and on March 30 the programme will take a trip to Malta on the day before the island's Independence Day.

Wednesdays on HCJB brings Ham Radio Today, which is running a series about 'Propagation', together with other features about amateur radio operating.

Look out for the review on this car radio in our sister publication Short Wave Magazine.



\* Practical Wireless & Short Wave Magazine in attendance

# Radio Diary

\*March 17: The Norbreck Radio, Electronics & Computing Exhibition will be held at the Norbreck Castle Hotel Exhibition Centre, Queens Promenade, North Shore, Blackpool. Admission is £1, OAPs 50p and under 14s free. Free raffle ticket and exhibition plan. Peter Denton G6CGF. Tel: 051-630 5790.

March 17: The Wythall Radio Club will be holding their 6th annual Radio Rally at Wythall Park, Silver Street, Wythall, Worcs., which is on the A435 near Junction 3 on the M42 south-west of Birmingham. Doors open 11am. There will be three halls plus a marquee, trade stands, Flea Market, Bring & Buy, a bar and snacks will be available, talk-in on S22 and admission is only 50p. Chris Pettitt G0EYO.Tel: 021-430 7267

March 17: Tiverton South West Radio Club have the 1991 Mid Devon Rally at the Pannier Market, Tiverton. Easy access, only minutes from junction 27 on the M5 with excellent free parking. Two halls of trade stands, Bring & Buy stall and mobile snack bar. Further displays and full refreshment facilities in the club room bar, which is open throughout the day. Doors open at 10am. Talk-in on S22. G4TSW, Mid Devon Rally, PO Box 3, Tiverton, Devon.

March 24: Bournemouth RS will be holding its fourth annual Amateur Electronics Sale at the Kinson Community Centre, Pelhams, Millhams Road, Kinson. Doors open 11am to 5pm. Talk-in by G1BRS on 144MHz on S22. Further details from Vic Sievey G4PTC, 3 Stratton Road, Bournemouth BH93PG. Tel: (0202) 516593.

\*March 24: The RSGB VHF Convention will be held at Sandown Park Exhibition Centre, Esher, Surrey.

March 24: Pontefract & District ARS have their 12th Annual Components Fair at the Carleton Community Centre, Carleton, Pontefract. Doors open 11am to 4.30pm. Trade stalls, bookstall, Bring & Buy, licenced bar and refreshments. Talk-in on S20. Admission by Prize programme (three prizes). Colin GOAAO, QTHR. Tel: (0977) 615549.

March 31: The Centre of England Amateur Radio Rally will be held at the British Motorcycle Museum, Bickenhill, near the NEC Birmingham (junction 6 M42). Doors open 10.30am, admission £1, OAPs 50p, children free. Over 60 trade stands in three large exhibition halls, Bring & Buy, talk-in on S22, bar and restaurant available, ample free parking, concessionary rates to visit museum. Frank Martin G4UMF.

Tel: (0952) 598173.

April 7: Lough Erne Amateur Radio Club will be holding their 10th annual mobile Rally in the Killyhevlin Hotel, Enniskillen. Doors open at 12 noon, talk-in on S21. Special guest Louis Varney G5RV. Alwyn Magee G10BFD QTHR. Tel: (0365) 323802.

April 7: The 5th Launceston Amateur Radio Rally will be held at Launceston College. There will be a large Bring & Buy, well-known traders, hot snacks and a bar. Also official Morse Tests (pre-booked viathe RSGB) will be held at the Rally. Doors open at 10.30am with talk-in on S22. Maggie. Tel: (040921) 219.

April 7: Cambridgeshire Repeater Group have their annual 'Extravaganza' at the Philips Radio Communications - Catering Centre, St. Andrews Road, Chesterton, Cambridge. There will be a Junk Sale, Bring & Buy and Auction. Doors open 10.30am, admission still only 50p. G. M. Garner GOHEM, New House, Birdbush Avenue, Saffron Walden, Essex CB11 4DJ. Tel: (0799) 23689.

April 7: The 24th White Rose Rally will be held at The Refectory, University of Leeds. Doors open 11am. All the usual attractions, talk-in on S22 and SU22, extensive free parking, food and drink at very reasonable prices. Entrance £1 by numbered programme. Free monster prize draw. Senior citizens, bored wives and kiddies free of charge. Tony G4DXA, PO Box 73, Leeds LS1 5AR.

\*April 14: Trafford ARC will be holding their Great Northern Rally at G-MEX, City Centre, Manchester. Doors open 10.30am, rally closes 5pm. Graham Oldfield 061-748 9804. April 21: Bury RS will be holding their Hamfeast '91 rally at the Castle Leisure Centre, Bolton Street, Bury. Lawrence Jones G4KLT. Tel: 061-762 9308. PLEASE NOTE THE CHANGE OF DATE.

\*April 27/28: The RSGB will be holding their National Amateur Radio Show at the National Exhibition Centre, Birmingham.

May 5: The 8th Anglo-Scottish rally will be held at Tait Hall, Kelso. Doors open 11am. All the usual attractions on this holiday weekend. Details from the rally co-ordinator GM4UIB. Tel: (0573) 24654.

May 6: Dartmoor RC have their rally at St. Annes Church Hall, Yelverton (A386), Devon. Doors open 10.30am. Trade stands, Bring & Buy, refreshments, parking. Talk-in on S22. Dave G1YPD. Tel: (0752) 703101.

May 12: Yeovil ARC have their 7th QRP Convention at the Preston Centre, Monks Dale, Yeovil. Doors open at 9am, admission is £1.50 which includes programme. All the usual traders, plenty of food and refreshments available. There will be four lectures during the day. David Bailey at 7 Thatcham Close, Yeovil BA21 3BS.

May 18: The Swindon Radio Rally is to be held at the Oasis Leisure Centre, North Star Avenue, Swindon, leave M4 at Junction 16. Doors open at 10.30am, trade stands, grand Bring & Buy, Repeater Group, etc, ample free parking. Talk-in by RAYNET on S22 from 0500hrs. For details contact **Jim G7GEA** on (0793) 611859 or John on (0793) 619014.

May 19: Mid-Ulster ARC have their annual 'Parkanaur' rally at the Silverwood Hotel, Lurgan, Co. Armagh. The rally will be open to the public from 12 noon. There will be the usual trade stands, Bring & Buy, bookstall, QSL bureau, etc. Talk-in on S22, 145.550. The proceeds of this rally will go to the Stanley Eakins Memorial Fund at Parkanaur, nr Dungannon. Jim Lappin Gily GS. Tel: (0762) 851179.

May 26: The Maidstone YMCA ARS are holding their biennial rally at the YMCA Sportscentre, Maidstone. As usual the rally will feature Trade and Special Interest Groups stands, refreshments and ample free parking. Alan Judge GONCW. Maidstone 750709.

May 26: Plymouth Radio and Electronics Fair is being held at Plymstock School, Church Road, Plymstock, Plymouth, Devon. Doors open at 11am. Attractions include large Bring & Buy, RSGB bookstall, many trade stalls, RSGB Morse testing and refreshments. Talk-in on S22. Jan Fisher GOIVZ. Tel: (0752) 340946.

\*June 9: The RNARS Rally will be held at HMS Mercury, near Petersfield. Gates open between 1000 and 1700. In addition to the dozens of Trade stands and the RNARS tent, there will be a Bring and Buy, a flea market offering tables for hire by the hour, a car boot sale, a large arts & crafts exhibition, radio-controlled power boats, cars and trains to mention but a few of the attractions. Cliff Harper. Tel: (0703) 557469.

\*June 9: Elvaston Castle Radio Rally will be held at Elvaston Castle Country Park, Derby. Peter Neal (0332) 700265.

June 9: The Southend Rally will be held in the Rocheway Centre, Rochford, Essex. Car Boot pitches will be available, either pre-booked or on the day on a first-come-first-served basis. **Stephen Blinkhorn G1XGP. Tel: (0702) 712595 evenings**.

June 9: Mid-Lanark ARS are holding their annual Open Day at Newarthill C. E. Centre, High Street, Newarthill. There will be the usual traders plus some new ones, a Bring & Buy stall, catering facilities, raffle prizes and a lucky catalogue number. Talk-in on S22. They have applied to hold Morse tests as usual, applications must be made in good time to the relevant department at RSGB HQ. Doors open 11am. Admission/Catalogue is £1. David Williams GM1SSA, 32/34 Carfin Street, New Stevenson, Motherwell, Scotland ML1 4JL Tel: (0698) 732403.

# For the latest news of special event stations, rallies, what's on the bands - ring

# Wireless-Line on 0898 654632

#### **Up-dated every Friday**

Do you want to hear the latest amateur radio news? What DX is about? The latest Satellite information? Mobile Rallies & Events, Times & Cancellations? All amateur radio news finds its way to the *PW* 'Newsdesk '91' every month - but did you know that by calling **0898 654632**, you can get a weekly up-date on the international amateur radio scene?

Running an amateur radio car boot sale this weekend? Spare places at your RAE class? Going on a DXpedition to a remote Island? Operating a special event station this weekend? Call **0202 678558** (answering machine after working hours) or write to **Sharon George** at the *PW* 'Newsdesk '91', give her the details and we'll include it in the magazine and Wireless-Line as soon as we can.

Wireless-Line - Your connection to Amateur Radio and news of your hobby.

Call 0898 654632 Now - for your latest up-date on the news.

Calls charged at 33p off-peak. 44p at all other times.

News & Information prepared by the staff of PW Publishing Ltd, Enefco House, The Quay, Poole, Dorset BH15 1PP.

# PW SUBSCRIBERS' CLUB

If you have a subscription then you will know about the *Practical Wireless* Subscribers' Club. If you do not have a subscription then doubtless you will be wondering just what this new page is all about. Membership of the *PW* Subscriber's Club is free and automatic for all Subscribers and is our way of saying thank you to all those who have enough faith in their favourite magazine to pay for it 'up front'. Each month there will be Special Offers and occasional competitions with some really useful prizes to be won.



The ARRL publish some of the most useful and authoratitive books on amateur radio. Their Antenna Compendium Volume 1 proved to be a best seller and now Volume 2 has just been published and should be equally as popular. This new book contains material that has never before been published - anywhere. So, whether you are only casually interested in antenna construction, or have a more serious interest in understanding fundamental antenna theory, this book must find its way onto your bookshelves. As a member of the Practical Wireless Subscriber's Club you can obtain your copy of this useful book for just £7.00 including post and packing, saving yourself £1.35 over the normal PW Book Service price. For Overseas Subscribers the price is £7.50 including surface postage.

This offer closes on 31 May 1991, overseas orders posted at own risk. Please mark your orders PW Subscriber's Club April, PW Publishing Ltd., FREEPOST, Enefco House, The Quay, Poole, Dorset BH15 1PP.

This offer is limited to one copy of The ARRL Antenna Compendium Volume 2 per subscriber and your order must be accompanied by your Subscriber Number or a subscription order using the form printed below. We regret that only PW Subcriber's Club members can apply.

## SUBSCRIPTIONS TO PRACTICAL WIRELESS

Be sure of your copy every month and qualify for the Subscribers' Club as well. Special offers and discounts available to all members, including those abroad.

Please indicate the type of subscription required:

PRACTICAL WIRELESS 1YEAR

□ £19.00(UK)

☐ £19.00(UK) ☐ £21.00 (Europe) ☐ £22.00(Rest of World)

**SHORT WAVE MAGAZINE 1 YEAR** 

□ £19.00 (UK)

☐ £21.00 (Europe)

☐ £22.00 (Rest of World)

SPECIAL JOINT SUBSCRIPTION 1 YEAR ONLY

□ £32.00 (UK)

☐ £35.00 (Europe)

☐ £37.00 (Rest of World)

Prices current at March 1991
Subscription to commence with issue dated......

□ Please include a copy of *The ARRL Antenna Compendium Volume 2* with my first issue at the special Subscribers' Club price of £7.00 inc. P&P. (£7.50 inc. surface post overseas.)

To: PW Publishing Ltd., FREEPOST, Subscriptions Dept., Enefco House, The Quay, Poole, Dorset BH15 1PP

☐ I enclose cheque/PO (Payable to PW Publishing Ltd) £.....

□ Charge to my Access/Visa Card the amount of £.....

If you do not want to deface your PW, a photocopy of this coupon will be acceptable.



# BOOK SERVICE 5 0202 665524

The books listed have been selected as being of special interest to our readers. They are supplied from our editorial address direct to your door. Some titles are overseas in origin.

#### **HOW TO ORDER**

POST AND PACKING; add 85p for one book, £1.20 for two or more books, orders over £30 post and packing free, (overseas readers add £1.50 for one book, £3.00 for two or more for surface mail postage) and send a postal order, cheque or international money with your order (quoting book titles and quantities) to PW Publishing Limited, FREEPOST, Enefco House, The Quay, Poole, Dorset BH15 1PP. Please make your cheques payable to Practical Wireless, payment by Access, Mastercard, Eurocard or Visa also accepted on telephone orders to Poole (0202) 665524. Books are normally despatched by return of post but please allow 28 days for delivery. Prices correct at time of going to press. Please note: all payments must be made in Sterling.

\* A recent addition to our Book Service.

O/P = Out of print. O/S = Out of stock.

## **RADIO**

## AIR & METEO CODE MANUAL

AIR & METEO CODE MANUAL

10th Edition. Jeerg Klingenfuss

Detailed descriptions of the World Meteorological Drganisation Global
Telecommunication System operating FAX and RTTY meteo stations, and its
message format with decoding examples. Also detailed description of the
Ammunitical Fixed Telecommunication Network amongst others. 289 pages £15.00

PASSPORT TO WORLD BAND RADIO 1991

This book gives you the information to explore and enjoy the world of broadcast band listening. It includes features on different international radio stations, receiver reviews and advice as well as the hours and languages of broadcast stations by frequency. 399 pages. £13.95

A guide for users of scanning receivers, covering hardware, antennas, accessories frequency allocations and operating prodedures. 245 pages. £8.95

SCANNERS 2
Peter Rouse GUTUKD
The companion to Scanners, this provides even more information on the use of the v.h.f. and u.h.f. communications band and gives constructional details for accessories to improve the performance of scanning equipment.
216 pages. 23.38

#### SHORT WAVE RADIO LISTENERS' HANGROOK

Arthur Miller
In easy-to-read and non-technical language, the author guides the reader through
the mysteries of amateur, broadcast and CB transmissions. 207 pages. £7.99

## RADIOTELETYPE CODE MANUAL

RADIUTELETYPE CUDE MARIUAL

10th Edition. Joerg Klingenfuss

This book gives detailed descriptions of the characteristics of telegraph

transmission on short waves, with all commercial modulation types including
voice frequency telegraphy and comprehensive information on all RTTY systems
and c.w. alphabets. 96 pages. £8.00

## THE SATELLITE EXPERIMENTER'S HANDBOOK (USA)

A guide to understanding and using amateur radio, weather and TV broadcast satellites. 207 pages. £7.50

#### 1934 OFFICIAL SHORT WAVE RADIO MANUAL

1939 OFFICIAL SHORT WAVE NADIO MARKOAL
Edited by Hugo Gersback
A fascinating reprint from a bygone age with a directory of all 1934 s.w. receivers,
servicing information, constructional projects, circuits and ideas on building
vintage sets with modern parts. 260 pages. £10.15

Articles from Practical Electricity 1910-11
Edited by Henry Walter Young
A reprint of interesting practical articles from the early days of radio.
99 pages. 26.85

## **BEGINNERS**

#### AN INTRODUCTION TO RADIO DXING (BP91)

R. A. Pesfold How to find a particular station, country or type of broadcast and to receive it as cleerly as possible. 112 pages. £1.95

BEGINNER'S GUIDE TO RADIO
9th Edition. Gordon J. King
Radio signals, transmitters, receivers, antennas, components, valves and
semiconductors, CB and amateur radio are all dealt with here. 266 pages. £8.55

## ELECTRONICS SIMPLIFIED - CRYSTAL SET CONSTRUCTION (BP92), F.

A. Wilson
Especially written for those who wish to take part in basic radio building. All the sets in the book are old designs updated with modern components.

72 pages. £1.75

THE SIMPLE ELECTRONICS CIRCUIT AND COMPONENTS Book One (BP62)

## **TELEVISION**

## THE ATV COMPENDIUM

THE ATY COMPENDION
Milke Wooding GROM
This book is for those interested in amateur television, particularly the home
construction aspect. There is not a 70cm section as the author felt this is covered
in other books. Other fields, such as 3cm TV, are covered in depth. A must for the
practical ATV enthusiast. 104 pages. £3.00

AN INTRODUCTION TO SATELLITE TELEVISION (8P195)
F. A. Wilson
Answers all kinds of questions about satellite television. For the beginner thinking
about hiring or purchasing a satellite TV system there are deteils to help you along.
For the engineer there are technical datails including calculations, formulae and
tables. 10th appass. £3.95

## A TV-DXERS HANDBOOK (BP176)

R. Bunney
Information on transmission standards, propagation, receivers including multi-standard, colour, satellites, antennas, photography, station identification, interference etc. Revised and updated 1986. 87 pages. £5.95

GUIDE TO WORLD-WIDE TELEVISION TEST CARDS

Edition 3. Keith Hamer & Garry Smith

Completely revised and expanded, this is a handy reference book for the DXIV
enthusiast. Over 200 photographs of 1est Cards, logos, etc., world wide. 60pages.

24,45

SATELLITE TELEVISION INSTALLATION GUIDE
2nd Edition. John Breads
A practical guide to satellite television. Detailed guidlines on installing and
aligning dishes based on practical experience. 56pages. £11.95

## **THEORY**

COMMUNICATION (BPBS)
Elements of Electronics Book 5
F. A. Wilson
Fundamentals of line, microwave, submarine, satellite, digital multiplex, radio and telegraphy systems are covered, without the more complicated theory or mathematics. 256 pages. 12.95

## FILTER HANOBOOK A practical design guide

by Stefan Niewiadomski
A practical book, describing the design process as applied to filters of all types.
Includes practical examples and BASIC programs. 195 pages. £25.00

Explains in simple terms the absolute fundamentals behind electricity and electronics. 244pages. £3.50

#### AUDIO (Elements of electronics - book 6)

AUDIO (Dements or electrisates - audio. by:

A. Wilson
his book studies sound and hearing, and examines the operation of microphone
oudspeakers, amplifiers, oscillators, and both disk and magnetic recordin
trained to give the reader a good understanding of the subject without gets
involved in the more complicated theory and mathmatics. 320 pages. £3.55

## PRACTICAL ELECTRONICS CALCULATIONS AND FORMULAE (8PS3)

F. A. Wilson
This has been written as a workshop manual for the electronics enthusiast. There is a strong practical bias and higher mathematics have been avoided where possible. 249 pages. 23.95

SOLID STATE DESIGN FOR THE RADIO AMATEUR
Was Hayward W7201 and Doug DeMaw W1FB
Back in print by popular demand! A revised and corrected edition of this useful
reference book covering all aspects of solid-state design. 256 pages. £10.95

#### The ARRL ELECTRONICS DATA BOOK

Doug DeMay WIFB
Back by popular demand, completely revised and expanded, this is a handy
reference book for the r.f. designer, technician, amateur and experimenter.
260 pages: E8.95

## A REGINNERS GUIDE TO MODERN ELECTRONIC COMPONENTS

R.A. Penfold This book covers a wide range of modern components. The basic functions of the components are described, but this is not a book on electronic theory and does not assume the reader has an in-depth knowledge of electronics. It is concerned with practical aspects such as colour codes, deciphering code numbers and the suitability. 164 pages. £3.95

#### **EVERYDAY ELECTRONICS DATA BOOK**

Mike Tooley BA
This book is an invaluable source of information of everyday relevance in the world
of electronics. It contains not only sections which deal with the essential theory of
electronic circuits, but it also deal with a wide range of practical electronic
applicantics. 250 pages. 28.35

## **LISTENING GUIDES**

## AIR BAND RADIO HANDBOOK (3rd Edition)

Devid J. Smith

Listen to conversations between aircraft and ground control. The author, an air traffic controller, explains more about this listening hobby. 174 pages. 25.99

#### AIR TRAFFIC CONTROL

David Adeir
A guide to air traffic control with maps, drawings and photographs explaining how eircraft are guided through crowded airspace. 176 pages. 0/P

that search (With Updates). George Wilcox
The listener's check list and guide to European broadcasting. Covers m.w., l.w., v.h.f. and s.w., including two special maps. 54 pages. £3.95

## FLIGHT ROUTINGS 1990 T.T.Williams

T.T.Williams (Identifies the flights of airlines, schedule, charter, cargo and mail, to and from the UK and Eire and overflights between Europe and America. 104 pages. £4.95

GUIDE TO BROADCASTING STATIONS
20th Edition 1989/90, Philip Darrington
Frequency and station data, receivers, antennas, Latin American DXing, reporting,
computers in radio, etc.
240 pages. £10.95

GUIDE TO FACSIMILE STATIONS 18th Edition
Joerg Kliegenfluss
This manual is the basic reference book for everyone interested in FAX. Frequency, callsign, name of the station, ITU country/geographical symbol, technical parameters of the emission are all listed. All frequencies have been measured to the nearest 100Hz. 318 pages 
£14.00

## **GUIDE TO FORMER UTILITY TRANSMISSIONS**

3rd Edition. Joerg Klingenhuss
Built on continuous monitoring of the radio spectrum from the sixties until the
recent past. A useful summary of former activities of utility stations providing
information in the classification and identification of radio signals. 126 pages. 28.00

## GUIDE TO UTILITY STATIONS

GUIDE 10 UTILITY STATIONS

Wh Edition. Joerg Klingenfuss

This book covers the complete short waverange from 3 to 30MHz plus the adjacent frequency bands from 0 to 150kHz and from 1.6 to 3MHz. It includes details on all types of utility stations including FAX and RTTY. There are 15802 entries in the frequency list and 3123 in the alphabetical callsign list plus press services and meteorological stations. 502 pages. £19.00

HF OCEANIC AIRBAND COMMUNICATIONS
3rd Edition. Bill Laver
Aircraft channels by frequency and band, main ground radio stations, European R/
T networks, North Atlantic control frequencies. 29 pages. £3.50

Revised and updated in 1988, this book shows the site, country, frequency/ wavelength and power of stations in Europe, the Near East and N. Africa, North and Latin America and the Caribbean, plus short wave stations worldwide.

## MARINE UK RADIO FREQUENCY GUIDE

BBIT Lawer
A complete guide to the UK s.w. and v.h.f. marine radio networks. Useful information, frequency listings and the World Marine Coastal Phone Stations. 62 pages. £4.95

NEWNES SHORT WAVE LISTENING HAND BOOK
Joe Pritchard G100W
A technical guide for all short wave listeners. Covers construction and use of sets
for the s.w.l. who wants to explore the bands up to 30MHz. 288pages. £12.95

## THE COMPLETE VHF/UHF FREQUENCY GUIDE

1980 - 1991 1990 - 1991 This book gives details of frequencies from 26-2250MHz with no gaps and who uses what. Recently updated, there are chapters on equipment requirements as well as antennas, etc. 88 pages. £5.45

THE INTERNATIONAL VHF FM GUIDE
7th Edition, Julian Baldwin G3UHK and Kris Partridge G8AUU
The latest edition of this useful book gives concise details of repeaters and become worldwide plus coverage maps and further information on UK repeaters.

#### THE POCKET GUIDE TO RTTY AND FAX STATIONS

Bill Laver

A handy reference book listing RTTY and FAX stations, together with modes and other essential information. The listing is in ascending frequency order, from 1.6 to 27.1 MHz. 46 pages £2.95

#### SHORT WAVE LISTENERS CONFIDENTIAL FREQUENCY LIST

Covering the services and transmission modes that can be heard on the bands between 1.635 and 29.7MHz. £1.95

VHF/UHF AIRBAND FREQUENCY GUIOE (Updated)
A complete guide to the airband frequencies including how to receive the signals, the frequencies and services. VoLMET and much more about the interesting subject of airband radio. 74 pages. Q/P

WORLD RADIO TV HANDBOOK 1991
Country-by-country listings of long, medium and short wave broadcast and TV stations. Receiver test reports. English language broadcasts. The s.w.l.'s "bible". £17.99

## INTERFERENCE

INTERFERENCE HANDBOOK (USA)

How to locate and cure r.f.r. for radio amateurs, CBers and TV and stereo owners 253 pages. £8.75

RADIO FREQUENCY INTERFERENCE (USA)
What causes r.f.i? Are all r.f.i. problems difficult, expensive and time-consuming to cure? These questions and many more are answered in this book.

84 pages. E4.30

## **AMATEUR RADIO**

The ARRL UHF/Microwave Experimentar's Manual

Various Authors

A truly excellent manual for the keen microwave enthusiast and for the budding microwaver. With contributions from over 20 specialist authors. Chapters covering techniques, theory, projects, methods and mathematics. A must for your bookshelf!

446 pages £13.50

#### AMATEUR RADIO CALL BOOK (RSGB)

Spring Edition
Now incorporates a 48-page section of useful information for amateur radio enthusiasts. 310 pages. £7.70

## AMATEUR RADIO SATELLITES the first 25 years Arthur C. Gee GZUK

Arthur C. Gee G2UK
This souvenir publication mainly a pictorial account of the pattern of developments which have occurred over the last 25 yeers. 34 pages. £2.25

## AN INTRODUCTION TO AMATEUR COMMUNICATIONS SATELLITES BP296

A Pickard
This book describes several currently available systems, their connection to an appropriate computer and how they can be operated with suitable software 102 pages. £3.95

#### AN INTRODUCTION TO AMATEUR RADID (BP257)

1. D. Poela

This book gives the newcomer a comprehensive and easy to understand guide through amateur radio. Topics include operating procedures, jargon, propagation and setting up a station. 150 pages. £3.59 HINTS AND KINKS FOR THE RADIO AMATEUR

Edited by Charles L. Hutchinson and David Newkirk
A collection of practical ideas gleaned from the pages of *QST* magazine.
152 pages. £4.95

# HOW TO PASS THE RADIO AMATEURS' EXAMINATION (RSGB) Clive Smith G4FZH and George Banbow G3HB The background to multiple choice exams and how to study for them with sample RAE papers for practice plus maths revision. 88 pages. 68.20

PASSPORT TO AMATEUR RADIO
Peprinted from PW1961-1902
The famous series by GW3JGA, used by thousands of successful RAE candidates in their studies. Plus other useful articles for RAE students.

PRACTICAL IDEAS FOR RADIO AMATEURS

PRACTICAL IDEAS TO A MADE A MA

PRACTICAL GUIDE TO PACKET OPERATION IN THE UK Mike Mansfield G6AWD

Aimed at all user of packet mode being an excellent introduction and reference manual. Spiral bound to lay flat 70 pages A4 sized. **25.95** 

RADIO AMATEUR'S GUIDE TO RADIO WAVE PROPAGATION

(HF Bands), F. C. Judd G2BCX
The how and why of the mechanism and variations of propagation in the h.f. bands. 144 pages. £8.55

THE 1991 ARRL HANDBOOK FOR THE RADIO AMATEUR

This is the 66th edition of this very useful hardback reference book. Updated throughout it has several new sections covering oscilloscopes, spectrum analysers, digital frequency synthesis, phase-noise measurement and new constructional projects. 1200 pages. £16.95

\*THE ARRL OPERATING MANUAL Another very useful book from the ARRL. Although writen for the American radio amateur, this book will also be of use and interest to the UK ameteur. 684 pages £12.95

THE ARRL SATELLITE ANTHOLOGY
The best from the Amateur Satellite News column and articles out of 31 issues of QST have been gathered together in this book. The latest information on DSCARs 9 through 13 as well asd the RS satellites is included. Dperation on Phase 3 satellites (DSCAR 10 and 13) is covered in detail. 97 pages. £4.95

THE COMPLETE OX'ER

THE CUMPLETE OF AT BOOK COVERS equipment and operating techniques for the DX chaser, from beginner to advanced. 187 pages £7.95

THE RAE MANUAL (RSGB)

The latest edition of the stendard aid to studying for the Radio Amateurs' Examination. Updated to cover the latest revisions to the syllabus. 132 pages £6.20

**RADIO AMATEUR CALLBOOK INTERNATIONAL LISTINGS 1991** 

**ENTITY OF THE OWNER OF THE OWNER OF THE OWNER O** 

RADIO AMATEUR CALLBOOK NORTH AMERICAN LISTINGS 1991

89th Edition
Listings of US amateurs (including Hawaii). Also contains standard time chart, census of amateur licences of th world, world-wide GSL bureau and much more. Over 1400 pages. £19.50

THE RADIO AMATEUR'S DX GUIDE (USA)

ton Edition
The guide contains information not easily obtained elsewhere and is intended as an eld and quick reference for all radio amateurs interested in DX.
30 pages. E2.85

THE RADIO AMATEUR'S QUESTIONS & ANSWER REFERENCE MANUAL. 4th Edition. R. E. G. Potri GBCCJ

This book has been compiled especially for students of the City and Guilds of London Institute RAE. It is structured with carefully selected multiple choice questions, to progress with any recognised course of instruction, although is is not intended as a text book. 280 pages. £7.95

ALL ABOUT YHF AMATEUR RADIO (USA)
W. I. OIT WISSAI
VHF/JHF propagation, including moonbounce and satellites, equipment and antennas. 172 pages. £7.95.

YOUR GATEWAY TO PACKET RADIO

Stan Horzepa WA1LOU

What is packet radio good for and what uses does it have for the 'average' amateur?

What are protocols? whre, why, when? Lots of the most asked questions are answared in this useful book. It included details of networking and space comunications using packet. 278 pages. €7.95

**MAPS** 

RADIO AMATEUR'S MAP OF NORTH AMERICA(USA)

Shows radio amateur prefix boundaries, continental and zonal boundaries. 760 x 636mm £2.95

IARU LOCATOR MAP OF EUROPE DARC

This multi-coloured, plastics laminated, map of Europe shows the AIRU (\*Maidenhead\*) Locator System. Indispensible for the v.h.f. and u.h.f. DXer. 692 x 872mm. 25.25

NORTH ATLANTIC ROUTE CHART
This is a five-colour chart designed for the use of ATC in monitoring transatla flights. Supplied folded. 740 x 520mm. £4.50

RADIO AMATEUR'S PREFIX MAP OF THE WORLD (USA)
Showing prefixes and countries, plus listings by order of country and of prefix.
1014 x 711mm. £2.95

RADIO AMATEUR'S WORLD ATLAS (USA)
Seventeen pages of maps, including the world-polar projection. Also includes the table of allocation of international callsign series. £3.50

**DATA REFERENCE** 

DIGITAL IC EQUIVALENTS AND PIN CONNECTIONS (BP140)

A. Michaels
Equivalents and pin connections of a popular selection of European, American and
Japanese digital i.c.s. 256 pages. Q/P

INTERNATIONAL DIODE EQUIVALENTS GUIDE (BP108)

INTERMALIBRADE AND A Michaels Possible substitutes for a large selection of many different types of semiconductor diodes. 144 pages. 0/P.

INTERNATIONAL TRANSISTOR EQUIVALENTS GUIDE (BP85)

A. Michaels
Possible substitutes for a popular selection of European, American and Japanese transistors. 320 pages. £3.50

LINEAR IC EQUIVALENTS AND PIN CONNECTIONS (BP141)

Equivalents and pin connections of a popular selection of European, American and

NEWNES AUDIO & HI-FI ENGINEER'S POCKET BOOK

Vivian Capel
This is a concise collection of practical and relevant data for anyone working on

sound systems. The topics covered include microphones, gramaphones, CDs to name a few. 190 pages. Hardback £9.55

NEWNES COMPUTER ENGINEER'S POCKET BOOK

This is an invaluable compendium of facts, figures, circuits and data and is indispensable to the designer, student, service engineer and all those interested in computer and microprocessor systems. 203 pages. Hardback 29.95

**NEWNES ELECTRONICS POCKET BOOK** 

эл Euruon Presenting all aspects of electronics in a readable and largely non-mathematical form for both the enthusiast and the professional engineer. 315 pages. Hardback £10.95

NEWNES RADIO AND ELECTRONICS ENGINEER'S POCKET BOOK

18th Edition. Keith Brindley
Useful data covering math, abbreviations, codes, symbols, frequency bends/
allocations, Uk broadcasting stations, semi-conductors, components, etc.
325 pages. Hardback £3.95

NEWNES TELEVISION AND VIDEO ENGINEER'S POCKET BOO

Eugene Trundle
This is a valuable reference source for practitioners in "entertainment" electronic equipment. It covers TV reception from v.h.f. to s.h.f. display tubes, colour camera technology, video recorder and video disc equipment, video text and hi-fi sound. 3/23 pages. Hardback O.P.

**POWER SELECTOR GUIDE (RP235)** 

J. C. J. Van de Ven This guide has the information on all kinds of power devices in useful categories (other than the usual alpha numeric sort) such as voltage and power properties making selection of replacements easier. 160 pages. £4.55

#### **FAULT FINDING**

ARE THE VOLTAGES CORRECT?

How to use a multimeter to fault-find on electronic and radio equipment, from simple resistive dividers through circuits using diodes, transistors, i.c.s and valves. 44 pages. £1.50

GETTING THE MOST FROM YOUR MULTIMETER (BP239)

R. A. Peinfold
This book is primarily aimed at beginners. It covers both analogue and digital
multimeters and their respective limitations. All kinds of testing is explained too.
No previous knowledge is required or assumed. 102 pages. £2.95

MORE ADVANCED USES OF THE MULTIMETER BP265

R.A. Penfold

This book is primarily intended as a follow-up to BP239, Getting the most from your Multimeter. By using the techniques described in this book you can test and analyse the performance of a range of components with just a multimeter (plus a very few inexpensive components in some cases). The simple add-ons described extend the capabilities of a multimeter to make it even more useful. 85 pages . £2.95.

OSCILLOSCOPES, HOW TO USE THEM, HOW THEY WORK 3rd Edition

IN THICKMEN
This book describes oscilloscopes ranging from besic to advanced models and the accessories to go with them. £14.55

TRANSISTOR RADIO FAULT FINDING CHART (BP79)

C. E. Miller
Used properly, should enable most common faults to be traced reasonably quickly.
Selecting the appropriate fault description at the head of the chart, the reader is
led through a sequence of suggested checks until the fault is cleared.
655 x 455mm lapprox). 20.95

## **CONSTRUCTION**

COIL DESIGN AND CONSTRUCTION MANUAL (BP 160) B.B. Banbani

ing h.f. calls to power transformers this 100 page pocket sized book med full of information and tables for the constructor. 110 x 175mm 100 page

FURTHER PRACTICAL ELECTRONICS CALCULATIONS AND FORMULAE

(Sr Lev)

Covering Maths, digital maths, electrostatics, electromagnetics and all forms of electronic calculations, with many worked examples, of amplifiers, noise, feedback etc. 450 pages, 110 x 175mm £4.95

HOW TO DESIGN AND MAKE YOUR OWN P.C.B.s (BP121)
R. A. Penfold
Designing or copying printed circuit board designs from magazines, including photographic methods. 80 pages. £2.50

INTRODUCING ORP
Collected articles from PW 1983-1985
An introduction to low-power transmission, including constructional details of designs by New George Dobbs GSR.V/ for transmitters and transceivers from Top Band to 14MHz, and test equipment by Tony Smith G4FAI. 64 pages. £1.50

MORE ADVANCED POWER SUPPLY PROJECTS (BP192)

R. A. Pentold The practical and theoretical aspects of the circuits are covered in some detail. Topics include switched mode power supplies, precision regulators, dual tracking regulators and computer controlled power supplies, etc. 92 pages. F2.55

POWER SUPPLY PROJECTS (BP76)

N. A. Pennola
This book gives a number of power supply designs including simple unstabilised types, fixed voltage regulated types and variable voltage stabilised designs.
91 pages. £2.50

PRACTICAL PUMP SUPPLES
Collected articles from PM 1978-1985
Characteristics of batteries, transformers, rectifiers, fuses and heatsinks, plus
designs for a variety of mainsdriven power supplies, including the P W\* Marchwood\*
giving a fully stabilised and protected 12V 30A d.c. 48 pages. £1.25

ORP NOTEROOK

CMP NOTEBUSY.

Doug DeMay W1FB

This book deals with the building and operating of a successful QRP station. Lots of advice is given by the author who has spent years as an ardent QRPer. All the text is easy-to-read and the drawings large and clear. 77 pages. £4.95

TEST EQUIPMENT CONSTRUCTION

m.A.F.emulu
Describes, in detail, how to construct some simple and inexpensive, but extremely useful, pieces of test equipment. 104 pages. £2.95

50 (FET) FIELD EFFECT TRANSISTOR PROJECTS
F.G.Rayer
50 circuits for the s.w.l., radio amateur, experimenter or audio anthusiast using f.e.t.s. 104 pages. £2.95

## **ANTENNAS (AERIALS)**

AFRIAL PROJECTS (RP105)

including active, loop and ferrite antennas plus accessory units.

ALL ABOUT CUBICAL QUAD ANTENNAS (USA)
W. I. On WGSAI & S. D. Cowen WZLX
Theory, design, construction, adjustment and opera
Yagis. Gain figures, 109 pages. £5.50 ent and operation of quads. Quads vs.

ALL ABOUT VERTICAL ANTENNAS (USA)
W. I. Orr WESAI & S. D. Cowan WZLX
Theory, design, construction, operation, the secrets of making vertical work.

AN INTRODUCTION TO ANTENNA THEORY (BP196)

H. C. Wright
This book deals with the basic concepts relevant to receiving and transmitting
antennas. Lots of diagrams reduce the amount of mathematics involved.
86 pages. £2.95

ANTENNA IMPEDANCE MATCHING

Wilfred N. Caron
Proper impedance matching of an antenna to a transmission line is of concern to rruper impedance matching of an antenna to a transmission line is or concern to antenna engineers and to every radio amateur, a properly matched antenna as the termination for a line minimises feed-line losses. Power can be fed to such a line without the need for a matching network at the line input. There is no mystique involved in designing even the most complex multi-element metworks for broadband coverage. Logical step-by-step procedure is followed in this book to help the radio amateur with this task. 192 pages. £11.95

BEAM ANTENNA HANDBOOK (USA)
W. I. Or Wissal & S. O. Cowen WZLX
Design, construction, adjustment and installation of h.f. beam antennas.
198 pages: £8.75

\*NOVICE ANTENNA NOTEBOOK Doug DeMaw W1FB

Doug Demaw WITB
Another book from the pen of WIFB, this time offering "new ideas for beginning hams". All the drawings are large and clear and each chapter ends with a glossary of terms. 130 pages. £5.95

UUI UF IHIN AIR
Collected Antenna Articles from PW 1977-1980
Including such favourites as the ZL Special and 'ZBCX 16-element beams for 2m, and the famous "Slim Jim", designed by Fred Judd GZBCX. Also features systems for Top Band, medium wave/long wave loop designs and a v.h.f. direction finding loop. Plus items on propagation, accessories and antenna design.

80 pages. £1.80

SIMPLE, LOW-COST WIRE ANTENNAS FOR RADIO AMATEURS (USA) W. I. Orr WSSAI & S. D. Cowan WZIX Efficient antennas for Top Bard to Zm, including "invisible" antennas for difficult station locations. 191 pages. £8.75

THE ARRL ANTENNA BOOK (USA) 15th Edition
A station is only as effective as its antanna system. This book covers propagation, practical constructional details of almost every type of antenna, tast equipment and formulas and programs for beam heading calculations. £12.95

THE ARRI ANTENNA COMPENDIUM (USA)

Volume One Fascination and hitherto unpublished material. Among the topics discussed are quads and loops, log periodic arrays, beam and multi-band entennas, verticals and reduced size antennas. 175 pages. £7.50

VILLED & WAVES
Collected Antenna Articles from PW 1980-1984
Antenna and propagation theory, including NBS Yagi design data. Practical
designs for antennas from medium weves to microwaves, plus accessories such
as a.t.u.s., x.v., and power meters and a noise bridge. Dealing with TVI.
160 pages. £3.00

Doug DeMaw W1FB
This book provides lots of designs, in simple and easy to read terms, for simple wire and tubing antennas. All drawings are large and clear making construction much easier. 124 pages. £5.95

25 SIMPLE AMATEUR BAND AERIALS (BP125)

E. ms. NOT! How to build 25 simple and inexpensive aerials, from a simple dipole throu beam and triangle designs to a mini-rhombic. Dimensions for specific sp frequencies including the WARC bands. 80 pages. £1.95

25 SIMPLE INDOOR AND WINDOW AFRIALS (RP136)

Designs for people who live in flats or heve no gardens, atc., giving surprisingly good results considering their limited dimensions. 64 pages. £1.75

25 SIMPLE SHORT WAVE BROADCAST BAND AERIALS (BP132) E. M. Noli

E. M. No!! Designs for 25 different aerials, from a simple dipole through helical designs to a multi-band umbrella. 80 pages. £1.95

25 SIMPLE TROPICAL AND MW BAND AERIALS (BP145) E. M. Noti

E. M. Moon Simple and inexpensive aeriels for the broadcast bands from medium wave to 49m. 64 pages. £1.75

THE RADIO AMATEUR ANTENNA HANDBOOK
WHItiam I. Orr WSSAI & Stuart. D. Cowen WZLX
Yagi, quad, quagi, i-p, vertical, horizontal and "sloper" antennas are all covered.
Also towers, grounds and rotators. 190 pages. £6.75

COMPUTING

AN INTRODUCTION TO COMPUTER COMMUNICATIONS (BP177)

R. A. Perifold
Details of various types of modern and their applications, plus how to interconnect
computers, moderns and the telephone system. Also networking systems and
RTTY. 96 pages. £2.95

AN INTRODUCTION TO COMPUTER PERIPHERALS (BP170)

J. W. Pentrola Covers a wide range of computer peripherals such as monitors, printers, disk drives, cassette recorders, moderns, etc., explaining what they are, how to use them and the various types of standards. 80 pages. 0/P

**NEWNES AMATEUR RADIO COMPUTING HANDBOOK** Joe Pritchard G1UOW

Joe Pritchard G1UUW

Shows how radio amateurs and short wave listeners can 'listen' to signals by reading text on a computer screen. This book also covers the aplication of computers to radio 'housekeeping' jobs such as log-keeping, OSL cards, satellite predictions and antenna design as well as showing how to control a radio with the computer. 368pages. £14.95

**MORSE** 

INTRODUCING MORSE
Collected Articles from PW 1982-1985
Ways of learning the Morse Code, followed by constructional details of a variety of keys including lambic, Triambic, and an Electronic Bug with a 528-bit memory.
40 pages. Et 25

Mark Francis
Designed to make you proficient in Morse code in the shortest possible time, this book points out meny of the pitfalls thet beset the student.

87 pages. 24.95

The prepaid rate for classified advertisements is 42 pence per word (minimum 12 words), box number 60p extra. Semi-display setting £13.90 per single column centimetre (minimum 2.5cm). Please add 15% VAT to the total. All cheques, postal orders, etc., to be made payable to Practical Wireless. Treasury notes should always be sent by registered post. Advertisements, together with remittance should be sent to the Classified Advertisement Dept., Practical Wireless, Enefco House, The Quay, Poole, Dorset BH15 1PP. Telephone (0202) 676033.

# **lassified**

Whilst prices of goods shown in advertisements are correct at the time of going to press, readers are advised to check both prices and availability of goods with the advertiser before ordering from noncurrent issues of the magazine

#### Receivers

B.F.O. KITS, resolves single side-band on almost any Also Steepletone FM/AIR/MW £9.95 CORRIGAN RADIOWATCH, 7 York Street, Ayr KA8 8AR.

G3LLL for ICOM & YAESU - BUT Holidays? Phone first Also CW Filters FT101ZD, 902, 707 & 102 £40 P.P. -Valves & Mod kits 101E, etc. - P.X. Commission sales. HOLDINGS AMATEUR ELECTRONICS, 45 Johnson Street, Blackburn BB2 1EF. Tel: (0254) 59595.

EDDYSTONE 40A Noise Measuring Test Sets. Instrument grade HF receive 130kHz-32MHz AM/SSB/CW solid state, batt/mains, internal loop, whip or external antenna. Superb calibrated front end attenuator, built-in noise calibrator, usable for DF. Ideal for EMC tests, also general purpose HF Rx, Good condition, with full manu-Is: £150. GAREX ELECTRONICS, STATION YARD, SOUTH BRENT, SOUTH DEVON, TQ109AL Tel: (0364) 72770 Fax:

OSCILLOSCOPE EX-MOD Double Beam with lead and manual £60.00, new Larkspur Morse keys £12.00. A ange of Amstrad and Spectrum Computers. New ex-MOD whip antennas will tune to 2M £5.50, large selection of war and post-war manuals. Ex-Mod VHF SWR Bridge 45-160MHz £27.00. All prices include P&P. Tel: Wolverhampton 20315.

LOWE SRX30 500ks to 30Mc/s receiver. £60.00. Tel: (0782) 639491.

HF SPOT FREQUENCY RECEIVER For marine distress, search and rescue or aeronautical coverage. Build for under £40.00. Parts no problem. Comprehensive construction manual £6.00 incl. Tel: (0752) 340487 evenings/weekends.

YAESU FL101TX, FR101D, SHURE 444, SP102 MANUALS, boxed. All leads for full transceive. 6 Metre 2 Metre FM boards fitted in RX. £400. Nigel G0DTQ (0488) 39544.

## **Antennas**

**DESKTOP TUNABLE ACTIVE ANTENNA** 150kHz to 30MHz. Details SAE: Perins 76c Whitehall Road, Gravesend, Kent DA12 5PH.

MAST 5 METRES Manually extended complete with tripod, Guys & Picketts for portable/mobile use. Price £399.00 delivered U.K. Phone CMTS Ltd. (0983) 67090 for placing your order.

## Service Sheets and Servicing

## TECHNICAL INFORMATION SERVICES (PW)

76. CHURCH STREET, LARKHALL, LANARKSHIRE ML9 1HE
Phone: (0698) 884585, Mon-Fri, 9am-5pm. OR. Phone: (0698) 883334 any other time.
IMMEDIATE dispatch on all ACCESS & VISA orders
PHONE OR WRITE NOW FOR FREE QUOTE & FREE CATALOGUE with every S.A.E.

SERVICE MANUALS & SERVICE SHEETS

Remember, not only do we have EVERY Service Sheet ever made, but we also have ONE OF THE WORLDS LARGEST SELECTION OF SERVICE MANUALS NOTE:- Over 200 separate Titles of Technical books are always in stock, over 1/2 are exclusive to TISI CTV SERVICING by KING - £14.95, VCR SERVICING by BEECHINGS - £25.00, Ku-BAND SATELLITE TV - £25.00

Available for most Video Recorders, Colour & Mono Televisions, Cameras, Test Equipment, Amateur Radio, Vintage Valve Wireless, Any Audio, Music Systems, Computers, Kitchen Appliances, etc.

Equipment from the 1930s to the present and beyond.

Over 100 000 models stocked, orignals and photostats.

FREE catalogue Repair and Data Guides with all orders.

Computers, Nitchen Appliances, etc.

Equipment from the 1930s to the present and beyond.

Over 100 000 models stocked, orignals and photostats.

FREE catalogue Repair and Data Guides with all orders.

MAURITRON TECHNICAL SERVICES (PW),

8 CHERRY TREE ROAD, CHINNOR, 0XON, 0X9 4QY

Tel: (0844) 51694 Fax: (0844) 52554

TECHNICAL MANUALS, AR88, CR100, R210, HRO, £4 each. Circuits only 150 pence, plus SAE, lists thousands. BENTLEY, 27 De Vere Gardens, Ilford, Essex IG1 3EB. Phone: 081-554 6631

#### RACK CHASSIS

MODEL SIZE (H, W, D') & PRICE 1RU5 - 1.75 × 19 × 5 38.00 1RU7 - 1.75 × 19 × 7 40.50 1RU10 1.75 × 19 × 10 43.00 2RU5 3.50 × 19 × 5 40.50 2RU7 3.50 × 19 × 7 43.00

RU=1.75

FOR THE CONSTRUCTOR UNITS ARE CONSTRUCTED OF

ALL ALUMINUM PARTS FACILITATION FARTS
FRONT & REAR PANELS ARE
CLEAR BRUSHED ANODIZED
THE BALANCE OF PARTS ARE
BLACK BRUSHED ANODIZED
UNITS SHIPPED FLAT

UNASSEMBLED SEND FOR FREE CATALOG OF 

2RU10 3.50 x 19 x 10 3RU5 5.25 x 19 x 5 3RU7 5.25 x 19 x 7 3RU10 5.25 x 19 x 10

#### TEST EQUIPMENT MAINTENANCE

Spare Parts, Service Manuals and a comprehensive repair service now available for all makes of Test Equipment (Scopes, Generators, PSUs, AVOs, Counters, DMMs, etc. etc.).

We support equipment manufactured by over 100 different companies.

New secondhand Test Equipment also supplied. Valves & Misc Components also supplied. Trade Enquiries welcome. No minimum order charge

#### **HESING TECHNOLOGY**

41 Bushmead Road, Eaton Socon, St Neots, Camba PE19 3BT Tel: (0480) 214488 (anytime) 216870 (eves).

## Wanted

TEST GEAR, Computers, Computer Surplus, Amateur. Bought for cash. (0425) 274274

MOST VALVES WANTED: for cash. Large or small quantites must be unused and boxed. CBS, 157 Dickson Road, Biackpool FY1 2EU (0253) 751858.

METER VCM 163 for AVO Valve Characteristic meter Mark IV. Please write to: T. Mitchell, 68 Rowan Street, Bendigo Vic 3550, Australia.

<b>ORDER FORM PLEASE WRITI</b>	E IN BLOCK C	APITALS		
Please insert this advertisement in the next available I enclose Cheque/P.O. for £(42p per w. (Cheques and Postal Orders should be made payable to Practical W	ord, 12 minimum, please			ress at top of page.
	CATEGORY HE	ADING	1	
Name				
Address				
85.3.4				

#### Miscellaneous

GZYF LOOP ANTENNAS COMPLETE WITH ATU FOR H.F. HAM RADIO BAND TRANSMISSION (SWT Doe to One 40, 15 and 10 and One Point Five to One 80 and 20) AND SW1s. AND LONG AND MEDIUM WAVE BANDS FOR BCLs. LOOP 21 inches square or triangle. No special skills required. Circuits, Parts Lists with sources of supply assembly/data. HIGH FROUNCY CLOPD 901 to 10 Metres ES. LONG AND MEDIUM WAVE LOOP for BCLs. ES. LONG WAVE MEDIUM WAVE LOOP 15 SOT 10 METRES FORTHES CL. AND SWLES. SHORT WAVE AND SYND THOUGH LOOP ON LONG WITH ANTENNA ES. SHORT WAVE AND SYND HOUSE CONTROL OF THE STREET AND AS AND SWLESS AND SWLESS AND SWLESS. AND SWLESS AND SWLE

HEATHKIT U.K. Spares and Service Centre. Cedar Electronics. 12 Isbourne Way, Broadway Road, Winchcombe, Cheltenham. Glos. GL54 5NS. Tel: 0242 602402.

VHF COMMUNICATIONS The worlds foremost VHF/ UHF microwave magazine £12.00 per year for four issues. VHF COMMUNICATIONS, 5 Ware Orchard, Barby, RUGBY CV23 8UF.

SWG	1lb	8oz	PER WIRE	2oz
8 to 34	3.63	2.09	1.10	0.88
35 to 39	3.82	2.03	1.27	0.93
40 to 43	6.00	3.20	2.25	1.61
44 to 47	8.67	5.80	3.49	2.75
48	15.96	9.58	6.38	3.69
	SILVER P	LATED CO	PPER WIR	E
14 to 30	10.10	5.20	2.93	1.97
	TINNI	ED COPPE	R WIRE	
14 to 30	3.97	2.41	1.39	0.94
Fluxcore				
Solder	5.90	3.25	1.82	0.94
Poet free n	lesse and VA	T @ 15% O	ders under £3	00 add 50

## Educational

MAIDSTONE YMCA Kents' radio tuition centre for RAE Novice C.B. & CW. For further information Tel: (0634) 831504 (RAE): (0622) 744545 (Novice): (0622) 30544 (12wpm CW) Morse testing May 11th. Dummy test 23rd April (0622) 676776.

AH Supplies

## Components

J. A. B. Electronic and R.F. Components. (Toko now available). Callers:- 1180 Aldridge Road, Rear of Queslett Motors, Great Barr, Birmingham. Tel: 021-366-6928 For opening times. MAIL ORDER Catalogue & Discount Vouchers send 75p.

TOROIDAL CORES, FERRITE BEADS, send 50p for catalogue to: FERROMAGNETICS, PO Box 577, Mold, Clwyd, N. Wales CH7 1AH.

## Veteran & Vintage

THE VINTAGE WIRELESS BOOK LISTING. Published regularly containing 100s of out of print, old and collectable wireless and TV books, magazines, etc. Send three first class stamps for next copy or £1.75 for next 4 issues. WANTED, Pre-1960 wireless books, magazines, catalogues, any printed material or Ephemera relating to wireless. CHEVET BOOKS, 157 Dickson Road, Blackpool, Lancashire FY1 2EU. Tel: (0253) 751858.

VINTAGE RADIO & AUDIO ENTHUSIASTS:-Contact us for components, valves, service sheets, radios & amplifiers. Mail order to anywhere - over the counter retails Saturday only. Send £1.50 for 1991 catalogue & sample newsheet. THE VINTAGEWIRELESS COMPANY, Tudor House, Cossham Street, Mangotsfield, Bristol BS17 3EN. Tel: (0272) 565472 or Fax: (0272) 575442. All major credit cards accepted by letter, PHONE OR FAX.

WANTED: SHURE 55.SH Microphone (0875) 33291.

## NOTICE TO ADVERTISERS

Would intending and existing advertisers please note that *Practical Wireless* has an editorial policy not to accept advertising for surveillance and 'bugging' transmitting and receiving equipment.

Magnum Rally ......34

## INDEX TO ADVERTISERS

Martin Lynch31	
Nevada	. 52
PW Publishing	. 45
R & D Electronics	
RN Electronics	.41
RSGB	
RST Valve	
Radio Shack	
Randam Electronics	
Raycom	. 23
SEM	64
SGC	
SRW Communications	
Short Wave Magazine	
Siskin	.54
South Midlands Communications	
Cover ii,	4, 5
Spectrum	
Stephens James	
Suredata	.45
Tandy	7
Technical Software	
Technology Partners	. 45
Ward Reg & Co	. 10
Waters & Stanton	
Wood & Douglas	

## Computer Soft/w & Hard/w

COMMODORE COMPUTERS (+4, C16, 64, 128). "MICROCOM" CW/RTTY TX/RX with superb Morse tutor. "TURBO LOG" ultimate high speed station log. "MICROCOM INTERFACE" ready built. S.A.E. to:- Moray Micro Computing, Enzie Slackhead, Buckie, Moray AB5 2BR. (Tel: 0542 7384).

IBM/COMPATIBLE SHAREWARE 10,000+ FILES. Send £1.50 for comprehensive catalogue on disk. Cheapest prices! AK SHAREWARE, 54 Sheldrake Road, Mudeford, Dorset BH23 4BP.

ATARI 520/1040/STE MORSE MASTER Complete CW tutor for novices and professionals. Send/receive under realistic on-air conditions. Complete with cable. £29.99 from BOSCAD LTD, 16 Aytoun Grove, Baldridgeburn, Dunfermline, FIFE KY12 9TA. For info Tel: (0383) 729584, evenings.

#### PC SOFTWARE BY G4BMK

RTTY, AMTOR, CW (Tx and Rx) SSTV, FAX, Audio Analyzer (Rx only). See review PW June 1990 Page 66. A high performance multimode program for IBM PC compatibles. £99 complete. Any mix of modes to your choice - send SAE for details and prices. Use with ST5 Versaterm etc, or our matching T.U., built, boxed: £69. State callsign, if any, with order.

GROSVENOR SOFTWARE (PW) 2 Beacon close, SEAFORD, East Sussex BN25 2JZ Tel: (0323) 893378

**AUCTION** of two-way hand-portables, mobiles, aerials and accessories. Basingstoke area, 2nd April 1991. Ring (0256) 83528 or 83707 for full brochure.

## **Pye Lowband AM Portables**

for disposal Quantity P5001, PF20 Westminster with crystals 86.3125MHz.

For bona fide users.
Offers tel: (0470) 83225

R1155A WWII Ex-RAF receiver with power unit working condition. Sensible offers. (04024) 73943.

**STRUMECH VERSATOWER P.60** 18M as new will deliver. £500.00 ono. (07695) 3636.

SATELLITE LNC/LNB DOWNCONVERTERS 10.95-11.75GHz. IF-0/P 950-1750MHz. Contains 1.4dBNF LNA, Mixer, 10GHz. DRO Oscillator. ONLY £50 each. Also have various microwave components, subassemblies and equipment. SATWAVE Limited. Please tel: 081-464 6252.

#### RCS VARIABLE VOLTAGE D.C. BENCH POWER SUPPLY

1 to 24 volts up to 0.5 amp. 1 to 20 volts up to 1 amp. 1 to 16 volts up to 1.5 amps O.C. Fully stabilised. Twin panel meters for instant voltage and current readings Overload protection. Fully variable. Operates from 240V A.C. Compact Unit: size 9 x 5.5 x 3ins.

142 Incl. VAT + Post &

NEW MODEL. Up to 38 volts DC at 6amp. 10 amp peak. Fully variable. Twin Pane Meters. Size 14.5 x 11 x 4.5in. £96 inc VAT. Carr £6

RADIO COMPONENT SPECIALISTS

337 Whitehorse Road, Croydon SURREY, U.K. Tel: 081-584 1665

List, Large S.A.E. Delivery 7 days, Callers Welcome. Closed Wednesday

144MHz to 2500MHz Cavity Wavemeter.

One Wavemeter to cover the VHF/UHF Bands of 144MHz to over 2500MHz. Don't get caught without one.

Write to: P. Sergent G40NF,

IOGHZ WAVEMETER KIT

Write to: P. Sergent G4ONF, 6 Gurney Close, Costessey, Norwich.

Tel: (0603) 747782

LIGHT WEIGHT ANTENNA MASTS 5 metre extended height, aluminium telescopic, manual extension. Full accessories available. Price £239.00 including carriage UK & VAT. Phone CMTS (0983) 67090.

## YOUR LOCAL DEALERS

SOUTH WALES

## ELECTRO MART

Receivers, Scanners, Howes, ERA, CB, Marine radio etc. part exchange welcome.

> 96 High St, Clydach, Swansea Tel: 0792 842135

WEST MIDLANDS

## BADGER BOARDS

QUALITY PCB's MULTIPLE or SINGLES & KITS

Please send S.A.E. for information or write for quotation to:

BADGER BOARDS 1180 Aldridge Road Great Barr, Birmingham B44 8PE 021 353 9326

**OXFORDSHIRE** 

#### PROCOMM (UK)

Cash paid for used Amateur Equipment.

Part exchange welcome SAE for stocklist.

9 a.m.-9 p.m. Mon-Sat Callers by appointment please. 102 Larkhill Road, Abingdon 0X14 1BJ 0235 532653 &

0860 593052

## VISA

## DERBYSHIRE

RILEY'S T.V. SERVICES LTD.

SUPPLIERS OF: -SCANNERS - C.B. 27-934 MHZ -AERIALS — TEST METERS — TOOLS
TELEPHONES KITS AND CABLES

> 125 LANGWITH ROAD HILLSTOWN CHESTERFIELD S44 9SP PHONE 0246 826578

CLOSED WEDNESDAY

HERNE BAY

СОМ

## ICOM (UK) LIMITED

The Official Icom Importer Unit 8, Sea Street Herne Bay, Kent CT6 8LD Tel: 0227 369464

Fax: 0227 360 155 Open Mon-Fri 9 am-5.30 pm (Lunch 1-2.00 pm)

SOUTHAMPTON

## South Midlands Communications

Official Yaesu Importer

S.M. House, School Close, Chandlers Ford Industrial Estate, Eastleigh Hants SO5 3BY. Tel: 0703 255111

**PORTSMOUTH** 

## Nevada Communications

Visit our showrooms for Icom, nwood, amateur radio products & a large range of scanning receivers. New & part-ex welcome.

189, London Road, North End, Portsmouth, Hants, PO2 9AE Tel: 0705 682145

## Reg. Ward & Co. Ltd.

The South-West's largest amateur o stockist. Approved dealer for Kenwood, Yaesu and Icom

1 Western Parade, West Street, Axminster, Devon, EX13 5NY Tel: 0297 34918

(Closed 1:00-2:00 and all day Monday)

#### BUCKINGHAMSHIRE

#### Photo-Acoustics Ltd.

Approved Kenwood, Yaesu and Icom dealer (part exchange always welcome)

58 High Street, Newport Pagnell, Buckinghamshire MK16 8AQ Tel: 0908 610625

(Mon-Fri 9:30-5:30, Sat 9:80-4:30)

call **MARCIA** 

TO FILL THIS BOX

on

(0202) 676033

WEST SUSSEX

## BREDHURST ELECTRONICS LTD.

High St. Handernss West Sussex Tel: (0444) 400796

Situated at the Southern end of M23. Easy access to M25 and South London. Open Mon-Fri Sem-Spm accept Wed Sam-12:30pm. Set 10am-4pm.

YORKSHIRE

YAESU COM Kenwood

## Alan Hooker **Radio Communications**

42, Netherhall Road, Doncaster.

Tel: 0302 325690 Open Mon-Sat 10-5pm Closed Thursdays

CORNWALL 24hrs, 7 Days a Week

## SKYWAVE

RADIO AMATEUR & MARINE COMMUNICATIONS SERVICES ICOM, YAESU, NAVICO JAYBEAM, Etc.

47 Trevarthian Road, St. Austell, Cornwall PL25 4BT Tel: 0726 65418 Voice Bank: 0426 961909 PLEASE MENTION

## PRACTICAL WIRELESS

WHEN REPLYING TO ADVERTISEMENTS

SOUTH YORKSHIRE

P. A. Electronic Supplies

NEW COMPONENTS KITS TRANSISTORS I/C AND SURPLUS EQUIPMENT MAIL ORDER CATALOGUE SEND CO/PO FOR £1.50

96 Rawmarsh Hill

Open Six Days Phone (0709) 527109

VISA

# RADIO SHACK



#### KENWOOD TS-850S

The latest transceiver from this famous stable

## **TS-850S SUPERB SPECIFICATIONS**

Creating a new era in Amateur Radio! Call us for the latest details and stock position, also for any other model from

#### KENWOOD ICOM YAESU

Scanners by AOR, Fairmate, Jupiter, Icom, Realistic, Bearcat to name but a few.

Competitive service and prices.

We will be pleased to quote you for anything you require in the communications or computer field. In order to avoid a great deal of time wasting on both our parts, we now deal with callers by appointment. We are pleased to hear from you and see you, and we aim to give you the attention you deserve, so please call us first.

**Terry Edwards G3STS** 

VISA

## RADIO SHACK LTD

188 BROADHURST GARDENS, **LONDON NW6 3AY** 

(Just around the corner from West Hampstead Station on the Jubilee Line) Giro Account No. 588 7151 Fax: 071-328 5066 Telephone: 071-624 7174





# Count on us!

# C-765 HF ALL BAND TRANSCEIVER



We enjoy listening. It's part of what we do well. So when ICOM heard you talking, our engineers designed a transceiver specially for you – the serious DX enthusiast with worldwide contacts in mind. The result is the new super advanced IC-765, an HF all band transceiver built to expand your HF world.

The IC-765 is equipped with ICOM's exclusive DDS (Direct Digital Synthesizer) System, a fully automatic antenna tuner, an electronic keyer with jambic operation and a full break in function.

## **Fully Automatic High Speed Antenna Tuner**

A built in CPU automatically memorises the pre-set position of each band without pre-set controls, tuner speed is ultra fast since tuning starts from a preset position. If the tuner cannot tune from the previous preset position, the re-try function changes the preset position and memorises the best position.

#### **10Hz Digit Display**

The large fluorescent display shows 7 digits for the operating frequency, the 10Hz digit is displayed.

#### **Band Stacking Register**

Each band memorises the last used frequency, mode and IF filter condition (narrow or wide).

## Complete System for CW Operators

The IC-765 has many advanced functions for CW operators such as CW pitch control, a built-in electric keyer, a keying speed control and high speed full break-in capability.

## **New PLL Circuit**

The advanced ICOM DDS System ensured high speed PLL lock-up times, clear signal emissions, and high C/N characteristics. A high speed PLL provides very fast CW full break-in performances.

## **Convenient Miscellaneaous Functions**

- 105dB dynamic range
- 10dB preamp and 10, 20 30 dB attenuator
- 99 memory channels
- Split memory on channels 90-99
- Built-in FL32A and FL52A CW narrow filters
- Programmed scan and memory scan
- IF, shift and Notch filter
- Fast/Slow/OFF Selectable AGC
- RF type speech compressor
- Noise blanker
- DATA switch for advanced data communications


## Icom (UK) Ltd.

Dept PW, Sea Street, Herne Bay, Kent CT6 8LD. Tel: 0227 363859. 24 Hour.

**Helpline:** Telephone us free-of-charge on <u>0800 521145</u>, Mon-Fri 09.00-13.00 and 14.00-17.30. This service is strictly for obtaining information about or ordering Icom equipment. We regret this cannot be used by dealers or for repair enquiries and parts orders, thank you. **Datapost:** Despatch on same day whenever possible.

Visa & Mastercards: Telephone orders taken by our mail order dept, instant credit & interest-free H.P.

VISA

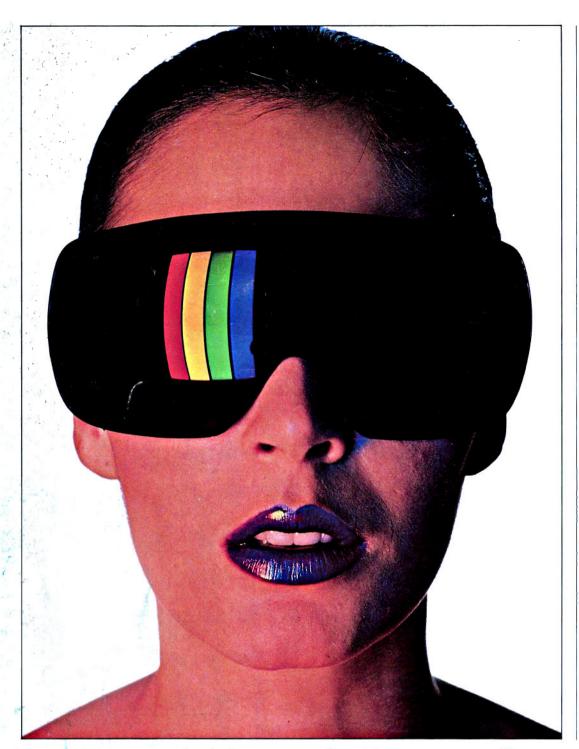



# ... set your sights on a better sound!

Experience a new sensation. An experience that opens up a whole new spectrum of sound.

Put yourself on stage at the Albert Hall, surrounded by a great orchestra. Imagine the sound you will hear, every nuance, every note; or travel up the Nile with an intrepid explorer, a journey not only full of breathtaking beauty and colour, but rich in the sounds of another continent; or capture the hidden gasps of 100,000 hardened fans at Wembly for the F.A. Cup Final, when the ball skims the crossbar with the last kick of the match; follow with your ears as well as your eyes, dodging the bullets, as your favourite hero battles out of yet another tight corner, it's just like being in a cinema!

Nicam hi-fi stereo will turn your living-room into a living room of

sound! You don't settle for second best with television picture quality, why settle for second best in television sound quality? Nicam sound is the new high quality digital stereo sound system, pioneered by BBC, ITV and TV/video manufacturers. In fact so good is Nicam it is comparable to the superb sound reproduction of the compact disc, when played through your existing hi-fi arrangement. If your television hasn't got a built-in Nicam decoder, you will need the Maplin Nicam Tuner System. Ultimately almost all of your favourite programmes will be broadcast in superb hi-fi quality stereo-sound. Without a Maplin Nicam Tuner you won't be able to capture every sound to its full.

Nicam hi-fi stereo. Catch your breath, open your eyes, and pin back your ears! It's what your hi-fi system was made for . . . It's what

#### DIGITAL STEREO TV SOUND FROM YOUR HI-FI

The complete kit contains all the components required to build the unit. However you will also need: a power supply, 12V at 800mA regulated e.g. Y221X at £8.95; a co-ax Y adaptor e.g. FS23A at £1.20; a co-ax lead to connect to your TV or video; RW36P 2m long at £1.28, JW39N 5m long at £1.98, or JW40T 10m long at £2.95; a phono lead to connect to your hi-lie.g. RW50E at 98p or a SCART/Peritel lead JW36P at £4.95. An infra-red remote control kit is also available LP20W at £2.95.

LP20W at £29.95.
Complete kit LP19V only £139.95 incl. VAT + £1 mail-order handling charge.




# MANIE ELECTRONICS

# **0702 554161**

For a friendly welcome and the very best of service why not visit our shops in Birmingham, Brighton, Bristol, Leeds, London (Edgware and Hammersmith), Manchester, Newcastle-upon-Tyne, Nottingham, Reading, Southampton and Southend-on-Sea.

Subject to availability. Prices subject to change.

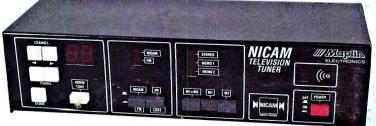

Digital stereo sound companion for your TV set.