

May 1995

Front Panel Unit WJ-9605



Description

The WJ-9605 is a detached front panel unit (FPU) with Input/Output (I/O) connectors located on a rear-panel shelf. The FPU consists of:

- 8-line by 40 character, backlit, supertwist LCD
- Numeric keypad
- Parameter adjust encoder
- Tuning encoder
- Softkeys

An operator controls the unit from the softkeys and LCD panel. The softkeys along the left side of the display allow menu selection, while the keys under the display allow function selection on the current menu. The keypad and encoder are then connected to the current selected function.

The FPU includes menus based on operations:

- **SELECTION** - allows the operator to select the device for control
- **MANUAL** - permits control of the receiver while in the manual, fixed-frequency operational mode

Features

- *Portable front panel for up to 2 receivers, or remote front panel for WJ-8700 Dual VLF/HF Receiver, WJ-9902 & WJ-9908 Equipment Frames*
- *WJ Receiver Net Controller*
- *Operator audio from the controlled receiver*
- *Receiver control for: WJ-8607, WJ-8607A, WJ-8609A, WJ-8654 or WJ-8809A*

WATKINS-JOHNSON COMPANY

700 Quince Orchard Road, Gaithersburg, Maryland 20878-1794
Phone: (800) WJHELPS or +(301) 948-7550
FAX: +(301) 921-9479 Email: wj.helps@wj.com Website: www.wj.com

All International sales of WJ equipment are subject to USA export license approval. This material provides up-to-date general information on product performance and use. It is not contractual in nature, nor does it provide warranty of any kind.

- **MEMORY** - allows editing of receiver memory channels off line of the current receiver operation
- **SWEEP** - permits control of the receiver sweep mode

- **LOCKOUT** - allows editing of the receiver lockout memory
- **CONFIGURATION** - used to set up I/O configurations of the Multi-receiver FPU

Specifications

Interfaces

SIO1	RS-232 for control of receiver #1 or communications with Host Card of no front panel (NFP)
SIO2	RS-232 for control of receiver #2
Net	RS-485 for net control
Headphone	Amplified output from selected receiver

Operating Temperature Range 0 to +50°C

Power Requirements 10 to 14 Vdc

Power Consumption 5 W

Weights & Dimensions

Height	Width	Depth	Weight
3.5 in.* (8.89 cm)*	8.3 in.* (21.08 cm)	3.0 in.* (7.62 cm)*	2.1 lbs. (0.95 kg)

*Excluding knobs and connectors

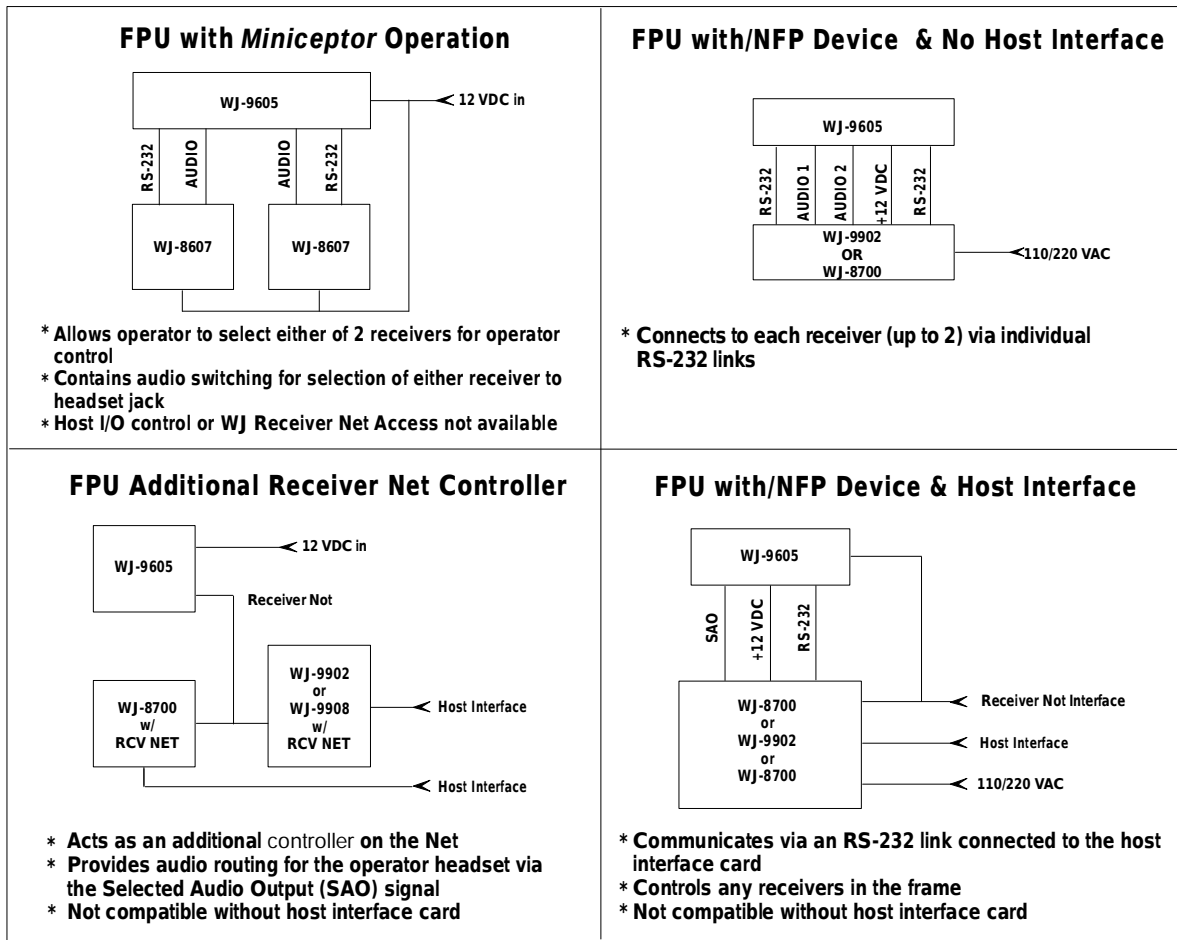


Figure 1. WJ-9605 FPU Configurations